

Oracle® Retail Service Layer
Programmer's Guide
Release 13.1

June 2009

Copyright © 2009, Oracle. All rights reserved.

Primary Author: Susan McKibbin

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this software or related documentation is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation shall be subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License (December 2007). Oracle USA, Inc., 500 Oracle Parkway, Redwood City, CA 94065.

This software is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications which may create a risk of personal injury. If you use this software in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure the safe use of this software. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software in dangerous applications.

Oracle is a registered trademark of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

This software and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

Value-Added Reseller (VAR) Language

Oracle Retail VAR Applications

The following restrictions and provisions only apply to the programs referred to in this section and licensed to you. You acknowledge that the programs may contain third party software (VAR applications) licensed to Oracle. Depending upon your product and its version number, the VAR applications may include:

- (i) the software component known as **ACUMATE** developed and licensed by Lucent Technologies Inc. of Murray Hill, New Jersey, to Oracle and imbedded in the Oracle Retail Predictive Application Server – Enterprise Engine, Oracle Retail Category Management, Oracle Retail Item Planning, Oracle Retail Merchandise Financial Planning, Oracle Retail Advanced Inventory Planning, Oracle Retail Demand Forecasting, Oracle Retail Regular Price Optimization, Oracle Retail Size Profile Optimization, Oracle Retail Replenishment Optimization applications.
- (ii) the **MicroStrategy** Components developed and licensed by MicroStrategy Services Corporation (MicroStrategy) of McLean, Virginia to Oracle and imbedded in the MicroStrategy for Oracle Retail Data Warehouse and MicroStrategy for Oracle Retail Planning & Optimization applications.
- (iii) the **SeeBeyond** component developed and licensed by Sun Microsystems, Inc. (Sun) of Santa Clara, California, to Oracle and imbedded in the Oracle Retail Integration Bus application.
- (iv) the **Wavelink** component developed and licensed by Wavelink Corporation (Wavelink) of Kirkland, Washington, to Oracle and imbedded in Oracle Retail Mobile Store Inventory Management.
- (v) the software component known as **Crystal Enterprise Professional and/or Crystal Reports Professional** licensed by SAP and imbedded in Oracle Retail Store Inventory Management.
- (vi) the software component known as **Access Via**TM licensed by Access Via of Seattle, Washington, and imbedded in Oracle Retail Signs and Oracle Retail Labels and Tags.
- (vii) the software component known as **Adobe Flex**TM licensed by Adobe Systems Incorporated of San Jose, California, and imbedded in Oracle Retail Promotion Planning & Optimization application.
- (viii) the software component known as **Style Report**TM developed and licensed by InetSoft Technology Corp. of Piscataway, New Jersey, to Oracle and imbedded in the Oracle Retail Value Chain Collaboration application.
- (ix) the software component known as **DataBeacon**TM developed and licensed by Cognos Incorporated of Ottawa, Ontario, Canada, to Oracle and imbedded in the Oracle Retail Value Chain Collaboration application.

You acknowledge and confirm that Oracle grants you use of only the object code of the VAR Applications. Oracle will not deliver source code to the VAR Applications to you. Notwithstanding any other term or condition of the agreement and this ordering document, you shall not cause or permit alteration of any VAR Applications. For purposes of this section, “alteration” refers to all alterations, translations, upgrades, enhancements, customizations or modifications of all or any portion of the VAR Applications including all reconfigurations, reassembly or reverse assembly, re-engineering or reverse engineering and recompilations or reverse compilations of the VAR Applications or any derivatives of the VAR Applications. You acknowledge that it shall be a breach of the agreement to utilize the relationship, and/or confidential information of the VAR Applications for purposes of competitive discovery.

The VAR Applications contain trade secrets of Oracle and Oracle’s licensors and Customer shall not attempt, cause, or permit the alteration, decompilation, reverse engineering, disassembly or other reduction of the VAR Applications to a human perceivable form. Oracle reserves the right to replace, with functional equivalent software, any of the VAR Applications in future releases of the applicable program.

Contents

Preface	vii
Audience	vii
Related Documents	vii
Customer Support	vii
Review Patch Documentation	vii
Oracle Retail Documentation on the Oracle Technology Network	vii
Conventions	viii
Third-Party Open-Source Applications	ix
1 Introduction	1
RSL Overview	1
2 Technical Architecture	3
Overview	3
Architecture Layers	3
Java EE Application Model	4
Oracle PL/SQL-based Application Model	5
3 Basic Operations	7
Simple Service Call	7
Configuration of the Stateless Session Beans	7
Success or Failure of the Service Call	7
Clients Starting a Transaction	7
4 Service Provider How-To Guide	9
Service Provider Application Configuration	9
rettek/services_rsl.xml	9
rettek/service_flavors.xml	9
Service Provider Application Layer Code for J2EE Models	9
Service Provider Application Layer Code for Oracle PL/SQL-Based Models	10
5 Client How-To Guide	13
Client Application Layer Configuration	13
rettek/services_rsl.xml	13
rettek/service_flavors.xml	13
rettek/jndi_providers.xml	13
Client Application Layer Code	14
6 RSLTestClient Utility	15
Installation and Configuration	15
Execution	16

A Appendix: Configuration Files	17
Services Framework Configuration.....	17
jndi_providers.xml	17
services_rsl.xml	17
service_flavors.xml	17
service_context_factory.xml	17
JDK Logging Configuration	17
J2ee-logging	17
Other Configuration	17
commons-logging.properties	17
B Appendix: Common Libraries	19
Common Components	19
platform-server.jar	19
platform-api.jar	19
platform-conf.jar	19
platform-resources.jar	19
platform-common.jar.....	19
RSL/Integration	19
oo-jaxb-bo-converter.jar	19
rib-public-payload-java-beans.jar	19
rib-public-api.jar	19
rib-private-kernel.jar	20
rsl.jar	20
rsl-<service provider application>-access.jar.....	20
rsl-<service provider application>-business-logic.jar.....	20
Third Party Provided.....	20
castor-1.0.5-xml.jar	20
ojdbc14.jar	20
commons-lang.jar.....	20
dom4j.jar.....	20
commons-collections.jar.....	21
commons-logging.jar.....	21

Preface

The purpose of this manual is to provide a basic understanding of the Oracle Retail Service Layer components, including the flow of a synchronous call between two applications.

Audience

This manual is designed for System Administrators, Developers, and Applications Support personnel.

Related Documents

For more information, see the following documents in the Oracle Retail Service Layer Release 13.1 documentation set:

- Oracle Retail Service Layer Installation Guide
- Oracle Retail Service Layer Release Notes

Customer Support

To contact Oracle Customer Support, access My Oracle Support at the following URL:
<https://metalink.oracle.com>

When contacting Customer Support, please provide the following:

- Product version and program/module name
- Functional and technical description of the problem (include business impact)
- Detailed step-by-step instructions to re-create
- Exact error message received
- Screen shots of each step you take

Review Patch Documentation

If you are installing the application for the first time, you install either a base release (for example, 13.0) or a later patch release (for example, 13.0.2). If you are installing a software version other than the base release, be sure to read the documentation for each patch release (since the base release) before you begin installation. Patch documentation can contain critical information related to the base release and code changes that have been made since the base release.

Oracle Retail Documentation on the Oracle Technology Network

In addition to being packaged with each product release (on the base or patch level), all Oracle Retail documentation is available on the following Web site (with the exception of the Data Model which is only available with the release packaged code):

http://www.oracle.com/technology/documentation/oracle_retail.html

Documentation should be available on this Web site within a month after a product release. Note that documentation is always available with the packaged code on the release date.

Conventions

Navigate: This is a navigate statement. It tells you how to get to the start of the procedure and ends with a screen shot of the starting point and the statement “the Window Name window opens.”

Note: This is a note. It is used to call out information that is important, but not necessarily part of the procedure.

This is a code sample
It is used to display examples of code

A [hyperlink](#) appears like this.

Third-Party Open-Source Applications

Oracle Retail Security Manager includes the following third-party open-source applications:

Software Provider: Intalio Inc.

Software Name: Castor

Software Version: 1.0.5

Jar File Name: castor-1.0.5-xml.jar

Provider Web Site: www.castor.org

License: ExoLab Public License (based on the BSD License)

Software Provider: The Apache Software Foundation

Software Name: Commons Beanutils

Software Version: 1.6

Jar File Name: commons-beanutils.jar

Provider Web Site: <http://jakarta.apache.org/commons/beanutils/>

License: The Apache Software License, Version 1.1

Software Provider: The Apache Software Foundation

Software Name: Commons Collections

Software Version: 2.1

Jar File Name: commons-collections.jar

Provider Web Site: <http://jakarta.apache.org/commons/collections/>

License: The Apache Software License, Version 1.1

Software Provider: The Apache Software Foundation

Software Name: Commons Digester

Software Version: 1.5

Jar File Name: commons-digester.jar

Provider Web Site: <http://jakarta.apache.org/commons/digester/>

License: The Apache Software License, Version 1.1

Software Provider: The Apache Software Foundation

Software Name: Commons Lang

Software Version: 2.0

Jar File Name: commons-lang.jar

Provider Web Site: <http://jakarta.apache.org/commons/lang/>

License: Apache License Version 2.0

Software Provider: The Apache Software Foundation

Software Name: Commons Logging

Software Version: 1.0.3

Jar File Name: commons-logging.jar

Provider Web Site: <http://jakarta.apache.org/commons/logging/>

License: The Apache Software License, Version 1.1

Software Provider: The Apache Software Foundation
Software Name: Commons Validator
Software Version: 1.0.2
Jar File Name: commons-validator.jar
Provider Web Site: <http://jakarta.apache.org/commons/validator/>
License: The Apache Software License, Version 1.1

Software Provider: dom4j.org
Software Name: DOM4J Project
Software Version: 1.4
Jar File Name: dom4j.jar
Provider Web Site: <http://www.dom4j.org>
License: BSD style license

Software Provider: The Apache Software Foundation
Software Name: Apache Jakarta Project
Software Version: 1.3
Jar File Name: jakarta-regexp.jar
Provider Web Site: <http://jakarta.apache.org/regexp/>
License: The Apache Software License, Version 1.1

Software Provider: JDOM Project
Software Name: jdom
Software Version: 1.0 beta9
Jar File Name: jdom.jar
Provider Web Site: <http://www.jdom.org/>
License: Apache: BSD/Apache style

Software Provider: JUnit.org
Software Name: JUnit
Software Version: 3.8.1
Jar File Name: junit.jar
Provider Web Site: <http://www.junit.org/index.htm>
License: Common Public License Version 1.0

Software Provider: The Apache Software Foundation
Software Name: Xerces
Software Version: 2.0.2
Jar File Name: xercesImpl.jar
Provider Web Site: <http://xerces.apache.org/>
License: The Apache Software License, Version 1.1

Software Provider: The Apache Software Foundation
Software Name: xml-commons
Software Version: 1.0.b2
Jar File Name: xml-apis.jar
Provider Web Site: <http://xml.apache.org/commons/>
License: The Apache Software License, Version 1.1

Introduction

RSL Overview

RSL handles the interface between a client application and a server application. The client application typically runs on a different host than the service. However, RSL allows for the service to be called internally in the same program or Java Virtual Machine as the client without the need for code modification.

All services are defined using the same basic paradigm -- the input and output to the service, if any, is a single set of values. Errors are communicated via Java Exceptions that are thrown by the services. The normal behavior when a service throws an exception is for all database work performed in the service call being rolled back.

RSL works within the Java EE framework. All services are contained within an interface offered by a Stateless Session Bean. To a client application, each service appears to be merely a method call.

Some Oracle Retail applications, such as RMS, are implemented in the PL/SQL language, which runs inside of the Oracle Database. RSL uses a generalized conversion process that converts the input java object to a native Oracle Object and any output Oracle Objects to the returned java object from the service. There is a one-to-one correspondence of all fields contained in the Java parameters as in the Oracle Objects used.

A client does not need to know if the business logic is implemented as an Oracle Stored Procedure or in some other language.

Technical Architecture

Overview

This chapter describes the overall architecture of the Oracle Retail Service Layer. The RSL architecture is built upon Java EE Java Enterprise Bean technology. It is composed of different architecture layers that perform specific task within the overall workflow of integration between two applications.

RSL provides two different models for service providers. The election of what model to use depends on what type of application the “service provider” developer is adding the RSL layer to. For applications that follow the Java EE or simple Java architecture, a Java EE model will be a better fit. An Oracle PL/SQL model is better fit for applications that heavily depend on database business logic, such as Oracle Forms-based applications (RMS).

“Client application” developers do not need to be aware of this distinction. The developer needs only to implement the code that retrieves an instance of the service proxy using the service interface and the Common Components provided `ServiceAccessor` class and makes the calls using a predefined set of payload objects for argument and return type.

Architecture Layers

The RSL is divided into a series of layers. These layers are as follow:

- The Client Application Layer (CAL). This layer is developed by client application developers. The code for this is dependent on the business processes of the Client.
- The Service Access Layer (SAL). This layer is generated by the Oracle Retail Integration Team. Its purpose is to provide a typed set of interfaces and implementations for accessing services. The SAL is the only set of interfaces that the CAL developer needs to be aware of. Although different implementations of the SAL might be used by the Client application, depending on the local or remote location of the required services, the CAL developer doesn’t need to be aware of this.
- The Service Provider Layer (SPL). This layer is implemented by the developers belonging to the service provider or knowledgeable in the service application domain. Each service must implement its corresponding interface as declared in the SAL. For RMS, RWMS or other Oracle Forms applications, each service will be offered via a PL/SQL Stored Procedure and use Oracle Object technology for input and output parameters. For Java EE offered services, input and output parameters will be generated via Value Objects – old fashioned Java beans that a) implement a defined interface and b) consist of “getter”, “setter” and “adder” methods. Refer to the next sections for a discussion of the Java EE and Oracle PL/SQL-based models.

Note: There is a one-to-one mapping of APIs detailed in the SPL versus APIs offered in the SAL. For Oracle based applications, a generic “Stored Procedure Caller” class, provided by the Integration Team, will be accessible through the Common Components `CommandExecutionServiceEjb` Stateless Session Bean. This class will handle all RMS provided simple services.

Note: The services offered by a single service should be a logical unit that is functionally cohesive. This has implications if a retailer wishes to use a different implementation, such as a completely home-grown implementation for this functionality.

Java EE Application Model

Figure 1 depicts the model and workflow to be used when integrating RSL with a Java EE or simple Java application. The objects on the left side of the dashed lines symbolize the client view of the transaction while the right side characterizes the service provider part. In the diagram, objects in blue are implementations provided by either the “client application” developer (left side) or “service provider” developer (right side.) The red objects indicate the interfaces, classes and payload objects provided by the Oracle Retail Integration Team to both developers. Oracle Retail’s Common Components objects are denoted in green.

The SPL developer needs to create a POJO (Plain Old Java Object) class that implements the SAL interface provided by the Integration Team. This class should be made available in the Java EE environment through the CommandExecutionService EJB. Please refer to Chapter 4 – Service Provider How-To Guide for an in-depth discussion on how to develop the Service Provider Layer and make it available to RSL client applications.

The CAL developer will create the code that will make it possible for the client application to contact the RSL service. This involves using the Common Components provided ServiceAccessor class to retrieve an instance of the Service Proxy to communicate with the service. Once this proxy is obtained, the CAL invokes calls as declared in the service interface provided by the Integration Team as part of the SAL deliverables. Chapter 5 – Client How-To Guide explains in details how to develop the client code and configurations to successfully invoke RSL services.

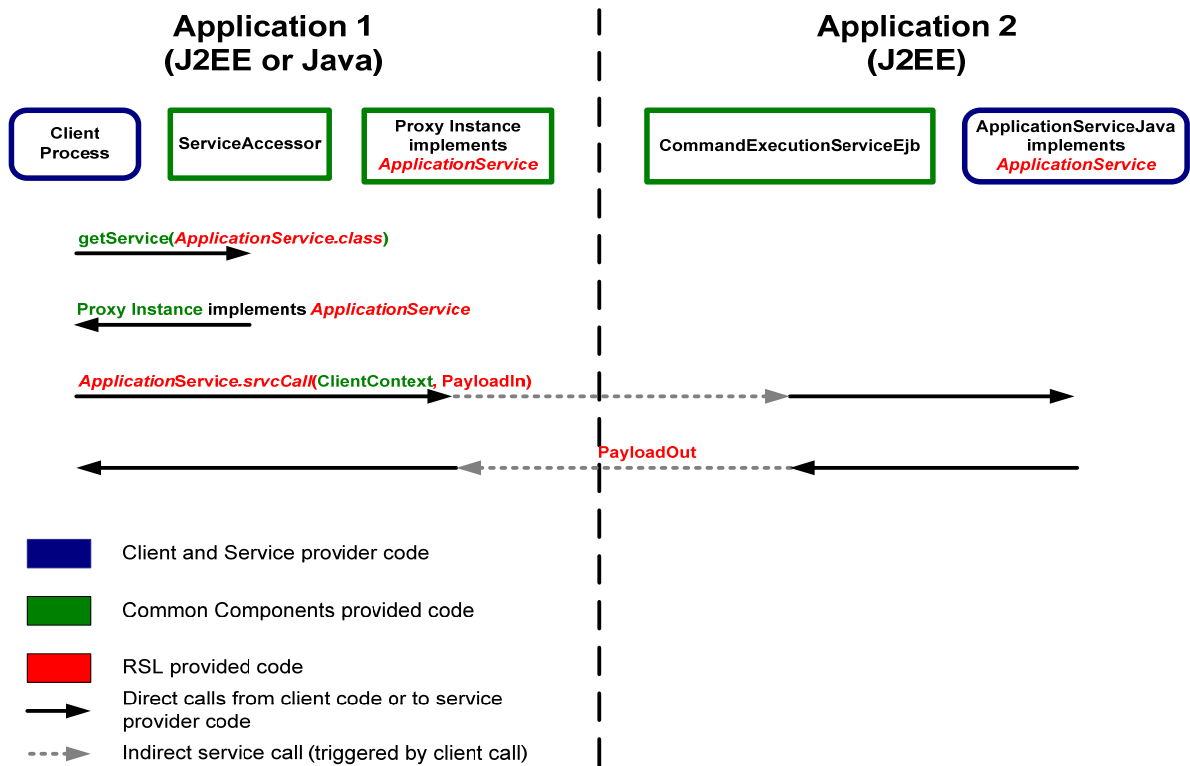


Figure 1

Oracle PL/SQL-based Application Model

Figure 2 shows the model and workflow to be used when integrating RSL with an application based on Oracle PL/SQL language (that is, RMS.) The objects on the far left symbolize the client view of the transaction; the objects between both dashed lines characterize the service provider part; finally, the objects on the extreme right represent the Oracle-based application. In this model, the Integration Team is responsible for distributing the “service provider” implementation of RSL. In the diagram, objects in blue are implementations provided by either the “client application” developer (left side) or “Application Team” developer (right side.) The red objects indicate the interfaces, classes and payload objects provided by the Integration Team to both developers. Oracle Retail’s Common Components objects are denoted in green.

The Oracle Retail Application Team is responsible for developing the PL/SQL Stored Procedure following the guidelines provided by the Integration Team and discussed in details in Chapter 4 – “Service Provider” How-To Guide.

The CAL developer will create the code that will make it possible for the client application to contact the RSL service. This involves using the Common Components provided `ServiceAccessor` class to retrieve an instance of the Service Proxy to communicate with the service. Once this proxy is obtained, the CAL invokes calls as declared in the service interface provided by the Integration Team as part of the SAL deliverables. Chapter 5 – Client How-To Guide explains in details how to develop the client code and configurations to successfully invoke RSL services.

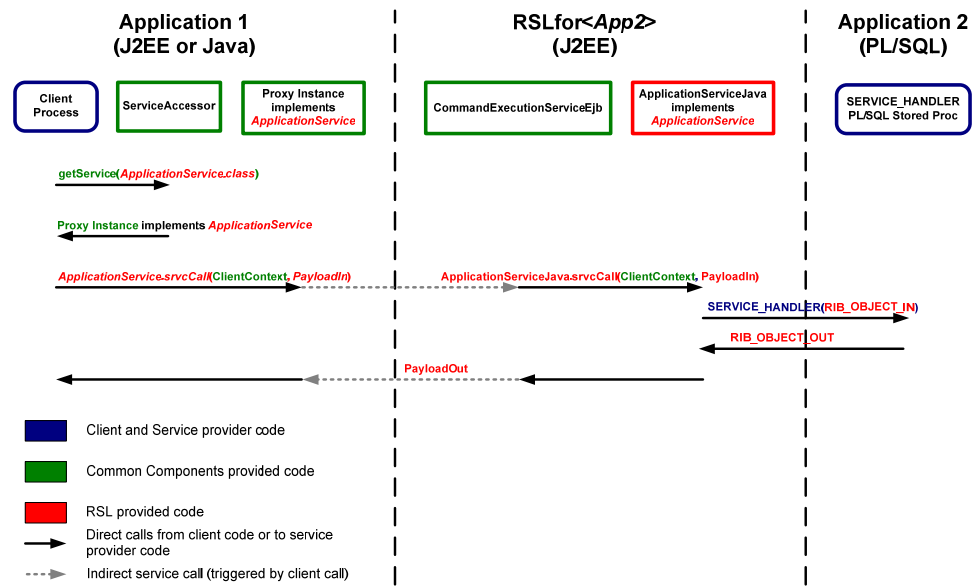


Figure 2

Basic Operations

This section details the synchronous data flow of a payload between end applications. The business logic is completely owned by the application implementing the service.

Simple Service Call

In the client application, some event triggers a service call. The first step is for the client to find the location of the service. This is done by using the “ServiceAccessor” which connects to the application server’s Java Naming and Directory Interface (JNDI) instance. Once the “Remote Home” of the service is located, the client then creates a “Remote” instance or handle to the service which is returned to the client to perform calls to the service.

At this point, the Java EE application server infrastructure takes control and performs a remote method invocation on the CommandExecutionService Stateless Session Bean. This EJB is responsible for looking up the implementation of the service interface, invoking the client requested service method call and returning the result.

The execution and control of database commits and rollbacks is dependent on three factors: the configuration of the Stateless Session Bean, the success or failure of the service call, and whether the transaction is started by the client or the application server.

Configuration of the Stateless Session Beans

Normally, RSL Beans are configured with “Container Managed” transactions. This means that the Application Server EJB Container will decide if database work will be committed or not. Furthermore, there is the assumption that the configuration of the database connection is a “Container Managed” resource. Within a container each resource has a specific name. A service may use one or more resources during its execution.

Success or Failure of the Service Call

If an error is encountered during the service execution, normal behavior is to roll back all database work. This is performed when an exception is thrown by the service for container managed transactions.

Clients Starting a Transaction

Most service calls have their transactions started by the service implementation or the Application Server and NOT by the client. However, it is possible for the Client to start a transaction and make multiple service calls within the same transaction.

Service Provider How-To Guide

Service Provider Application Configuration

As mentioned earlier, the Service itself is developed by the service provider application. The following files need to be properly configured in the service provider application.

retек/services_rsl.xml

```
<?xml version="1.0" encoding="UTF-8"?>
<services-config>
  <customizations>
    <interface package="com.retek.rsl.<app>">
      <impl package="<application specific>" />
    </interface>
  </customizations>
</services-config>
```

The name of the package for the interface usually follows the com.retek.rsl.<app> convention, where <app> will be substituted by the name of the service provider application: rms, rpm.

The implementation package name will be provided by the service provider once the code is developed; this name is irrelevant for the client application.

retек/service_flavors.xml

```
<?xml version="1.0" encoding="UTF-8"?>
<services-config>
  <flavors set="server">
    <flavor name="java"
locator="com.retek.platform.service.SimpleServiceLocator" suffix="Java"/>
  </flavors>
</services-config>
```

Service Provider Application Layer Code for J2EE Models

An example of a SPL Service implementation is seen below. This sample implements the PriceInquiryService interface. All of the methods have been stubbed out, as the logic is unknown to anyone outside of the service providing application.

Note: The name of these implementation classes should follow a naming convention such as ServiceInterfaceNameJava (see example above). This allows the Common Components service framework to locate the SPL's implementation class by using the "server" flavor. This naming convention is configured in the SPL's service_flavors.xml file.

```
package com.retek.rpm.service;

import org.apache.commons.logging.Log;
import org.apache.commons.logging.LogFactory;

import com.retek.platform.exception.RetekBusinessException;
import com.retek.platform.service.ClientContext;
import com.retek.platform.service.FallbackHandler;
import com.retek.rib.binding.payload.PrcInqDesc;
import com.retek.rib.binding.payload.PrcInqReq;
import com.retek.rsl.rpm.PriceInquiryService;

public class PriceInquiryServiceJava implements PriceInquiryService {

    protected final Log LOG = LogFactory.getLog(getClass());

    public void attachFallbackHandler(FallbackHandler arg0) {
        LOG.debug("Executing business logic for attachFallbackHandler");
    }

    public PrcInqDesc prcinqry(ClientContext client, PrcInqReq query) throws
        RetekBusinessException {
        LOG.debug("Executing business logic for query");
        return new PrcInqDesc();
    }
}
```

Service Provider Application Layer Code for Oracle PL/SQL-Based Models

For each service interface in the Service Access Layer, the application developer must create a package that contains a stored procedure named `SERVICE_HANDLER`. The signature of this stored procedure is as follow:

PROCEDURE	SERVICE_HANDLER	(	O_status	OUT	RIB_OBJECT,
			O_payload	OUT	RIB_OBJECT,
			I_action	IN	VARCHAR2,
			I_payload	IN	RIB_OBJECT,
			I_client	IN	RIB_OBJECT);

The `O_status` return object should be an instance of a `RIB_STATUS_REC` Oracle type object in the database. This object contains two variables. A `status_code` variable of type `varchar2` that holds the status of the `SERVICE_HANDLER()` call; a value of "S" will indicate the call was successful; any other status code should be accompanied by a description, assigned to the second `varchar2` variable of the `RIB_STATUS_REC` object.

The `O_payload` return object is the value that will be returned to the client application after the service call.

`I_action` is a `varchar2` representing what type of action to perform for the given payload. Actions should match one-to-one to methods in the service interface. Each method call from the client application will pass a different `I_action` value to the `SERVICE_HANDLER()` stored procedure; this way, the application developer can route the request to different business processes in their application.

`I_payload` corresponds to the object sent by the client application and used by the stored procedure to perform some business process action.

`I_client` is an object of type `RIB_CLIENT_REC` that represents the instance of the `ClientContext` object sent by the client application to the RSL service. This `ClientContext` is translated to a `RIB_CLIENT_REC` Oracle type that can be used by the application developer to identify the context used for the invocation of this call.

Client How-To Guide

Client Application Layer Configuration

As mentioned earlier, the CAL is developed by the “client application” developer. The following files need to be properly configured in the client application.

retek/services_rsl.xml

```
<?xml version="1.0" encoding="UTF-8"?>
<services-config>
  <customizations>
    <interface package="com.retek.rsl.<app>" app="<app>">
      <impl package="" />
    </interface>
  </customizations>
</services-config>
```

An entry like the following should exist in the client application’s services_rsl.xml file. The name of the package for the interface usually follows the “com.retek.rsl.<app>” convention, where <app> will be substituted by the name of the service provider application: rms, rpm.

The implementation package name is irrelevant in the client application, since this will go through the CommandExecutionService EJB to make the service calls.

retek/service_flavors.xml

```
<?xml version="1.0" encoding="UTF-8"?>
<services-config>
  <flavors set="client">
    <flavor name="ejb" locator="com.retek.platform.service.EjbServiceLocator"
remote-suffix="Remote" home-suffix="RemoteHome"/>
  </flavors>
</services-config>
```

retek/jndi_providers.xml

```
<?xml version="1.0" ?>
<ejb_context_overrides>
  <!-- For managed OC4J -->
  <provider app="<app>"
url="opmn:ormi://<oas_host>:<oas_port>:<app_oc4j_instance_name>/<app>"
factory="oracle.j2ee.rmi.RMIInitialContextFactory" />

  <!-- For standalone OC4J -->
  <provider app="<app>"
url="ormi://<oas_host>:<oas_port>/<app>"
factory="oracle.j2ee.rmi.RMIInitialContextFactory" />
</ejb_context_overrides>
```

Client Application Layer Code

An example of a CAL method call is seen below. This sample calls the “prcinqqry” method of the PriceInquiryService. The Service interface and the input and output Payload classes will be provided by the Integration Team.

One parameter seen below is the Oracle Retail Common Components ClientContext object. The CAL must create this object. It is used for application logging and tracking purposes. It will be a required object on every service interface. Besides the constructor parameters, this object will identify the host name the object was created on, the Process ID, the Thread ID that created the object and the Locale, or language, of the client.

```
import com.retek.platform.exception.RetekBusinessException;
import com.retek.platform.service.ClientContext;
import com.retek.platform.service.ServiceAccessor;
import com.retek.platform.util.type.security.SecureUser;
import com.retek.rib.binding.payload.PrcInqDesc;
import com.retek.rib.binding.payload.PrcInqReq;

public class ClientCode {
    public PrcInqDesc prcinqqry(PrcInqReq request)
    throws RetekBusinessException {

        // create a client ID. This may be cached and reused.
        ClientContext ctx = ClientContext.getInstance();
        SecureUser user = new SecureUser("username", "firstname",
            "lastname", null);
        ctx.setUser(user);
        ctx.setLocale(Locale.US);

        // create a new client handle.
        PriceInquiryService service =
            ServiceAccessor.getService(PriceInquiryService.class);

        // call the query method on service
        try {
            PrcInqDesc price = service.prcinqqry(request);
            return price;
        } catch (RetekBusinessException rbe) {
            throw rbe;
        }
    }
}
```

RSLTestClient Utility

The RSL Client Test Application is a tool created to help verify that a Client Application can successfully establish communication with an RSL Service Provider Application.

The test consist of very simple service calls that upon success will return a message indicating that a call has been made with a specific timestamp. In case of errors, it will display a message indicating the possible causes for the problem and how to fix it.

This test support both RSL's Java EE Application Model and Oracle PL/SQL-based Application Model. If the RSL Service Provider follows the Java EE Application Model, an error message might occur during execution of the last test. As indicated by the error, this is not a concern if the test fails in the Java EE Application Model, as the last test might not be applicable for such model. If the RSL Service Provider follows the Oracle PL/SQL-based Application Model, then make sure that all installations instructions have been followed as outlined by the next section.

Installation and Configuration

The first two steps are only required if the RSL Service Providers follows the Oracle PL/SQL-based Application Model; if not, please ignore these steps and go directly to step 3.

1. Load the RSL Test objects in the database. This can be done by executing the `@CreateRslTestObjects` command in a SQL Plus terminal. The `CreateRslTestObjects.sql` script should be found in the `testapp` directory of the RSL Server or Client pak.
2. Load the `RSLSVC_TEST` package in the database. This can be done by executing the `@RSLSVC_TEST.pkb` command in a SQL Plus terminal. The `RSLSVC_TEST.pkb` script should be found in the `testapp` directory of the RSL Server or Client pak.
3. Edit the `jndi.properties` file located in the `testapp` directory of the RSL Server or Client pak and enter the `java.naming.security.principal` and `java.naming.security.credentials` values. This must be the same as the username and password of the user that has started the OC4J instance, which is typically an administrative account created when a new OC4J instance was created.

4. Edit the `rsctestclient.bat` or `rsctestclient.sh` script and customize it for the Client Application environment:
 - a. Set the `JAVA_HOME` variable to the location of a 1.5 or higher JDK installation.
 - b. Set the `RSL_SERVER_PROVIDER` variable to `OC4J`.
 - c. The `CONFIG_DIR` variable should be set to the location of the directory that contains the `retek/jndi_providers.xml`, `retek/service_flavors.xml` and `retek/services_rsl.xml` files to be used by the Client Application. Do not include "retek" in the path. For this test, it is recommended that you use the same configuration files as those the Client Application will use when released.
These configuration files should be from
`RslClientPakx.x.xForAPPx.x.x_eng_ga.tar` and not from
`RslServerPakx.x.xForAPPx.x.x_eng-ga.tar`.
 - d. Set `CLIENT_LIB` to the folder that contains all the jar files required for this test. The RSL paks do not distribute these jar files (except for the RSL specifics). It is assumed that all jar files will be already available in the Client Application library directory.

Execution

Make sure the RSL Service Provider Application is up and running; then execute the `rsctestclient.bat` or `rsctestclient.sh` script. After all tests have been completed, the following message will be shown:

```
>>>> Test completed successfully <<<<
```

indicating that all tests completed successfully, or the following message:

```
>>>> Test completed with possible errors, see sections above <<<<
```

indicating that there might have been an error during the execution of one of the tests. Once an error has been detected, the other tests will not be performed. Please examine the output to determine the cause of the error.

When executing this test against an RSL Service Provider that follows the Java EE Application Model, and if steps (1) and (2) in the "Installation and Configuration" section were not followed, the following message will be shown

```
>>>> Test completed with possible errors, see sections above <<<<
```

even if all tests passed successfully. Ignore this message and assume all tests passed successfully if the last test ran was the `SERVICE_HANDLER` stored procedure test, as this is the last test and is not relevant for Java EE Application Models.

Appendix: Configuration Files

The RSL uses a variety of configuration files. These are mostly Common Components related that we've packaged as part of the RSL to allow independent configuration.

Services Framework Configuration

jndi_providers.xml

The file must be in the classpath located in a *retek* directory. The JNDI providers's XML is used by the EJBServiceLocator to lookup Services in remote JNDI's. Please reference the Common Components documentation for specific formatting of this file.

services_rsl.xml

The file must be in the classpath located in a *retek* directory. Within this file are the package locations of the Service Implementations, which are used to configure the ServiceFactory. Please reference the Common Components documentation for specific formatting of this file.

service_flavors.xml

The file must be in the classpath located in a *retek* directory. Within this file are flavorsets, which are used to configure the ServiceFactory. Please reference the Common Components documentation for specific formatting of this file.

service_context_factory.xml

The file must be in the classpath located in a *retek* directory. This specifies the factory class used by Common Components to retrieve a service context implementation for RSL.

JDK Logging Configuration

We utilize the commons-logging framework provided by Jakarta.apache.org. The current property file is configured to use JDK logger as its default factory.

J2ee-logging

This file must be in the classpath. This is the main configuration file for JDK logging.

Other Configuration

commons-logging.properties

This file must be in the classpath. It contains the correct logging factory to instantiate for RSL. We utilize the Jdk14Logger, but you may configure you application differently through this file.

Appendix: Common Libraries

This section lists the third party jars necessary for RSL functionality. It also describes why each is necessary and what it provides to the framework.

The RSL is built upon multiple existing technologies developed within Oracle Retail. Its reuse is essential to interoperability between the RSL and other applications.

Common Components

platform-server.jar

This jar contains common components specific code for Oracle Retail. This includes the Service framework. All services developed will be dependant on this jar for its use of AbstractService and Service related classes.

platform-api.jar

This jar contains common components specific code for Oracle Retail. This includes Exceptions and other Objects that could be transferred “over the wire”.

platform-conf.jar

This jar contains common components specific configuration files.

platform-resources.jar

This jar contains common components specific resource files for Oracle Retail.

platform-common.jar

This jar contains common components specific code for Oracle Retail.

RSL/Integration

oo-jaxb-bo-converter.jar

This jar contains specific code for Oracle Retail to convert Oracle Objects to Java and vice versa.

rib-public-payload-java-beans.jar

This jar contains the java bean representation of business objects. They are collectively referred to as payloads. The payloads are generated utilizing the RIB artifact generator. They are dependant on castor for marshalling and unmarshalling. Payloads located in this jar are type specific, this may cause interoperability issues with legacy applications that are non-type specific, but follows in the future path of the project.

rib-public-api.jar

This jar contains external public RIB APIs. Java interfaces, factories and exception reside in this jar.

rib-private-kernel.jar

This jar contains bulk of the RIB kernel code. This jar contains various utilities for use with Oracle Retail projects. Included is an OracleStructDumper, which aides in the debugging of converting objects. There are also various string and factory objects that may be of use.

rsl.jar

This jar contains utility, helper and exception classes used by the RSL framework.

rsl-<service provider application>-access.jar

This jar contains the specific Interface(s) to access Services from another application (SPL). These classes will ultimately be automatically generated by the RIB Framework GUI.

rsl-<service provider application>-business-logic.jar

This jar contains specific RSL implementations of the Interface(s). The CommandExecutionServiceEjb will look up these Implementations. This jar is provided only for Oracle PL/SQL-based applications where the Integration Team provides the Service Provider Layer.

Third Party Provided

Most of these jars are provided via open source. It is recommended to use the packaged jars within the RSL ear and not upgrades. The RSL will provide updates in related releases that will include the update to these jars.

castor-1.0.5-xml.jar

This jar contains classes related to the castor subsystem. Payloads for marshalling and un-marshalling between XML and Java Bean representations utilize it. Documentation and related information is located here: <http://castor.exolab.org>

ojdbc14.jar

This jar contains classes related to the Oracle JDBC driver. It is utilized within the conversion utilities in the rsl.jar. This jar file has been updated for JDK 1.5
Documentation and related information is located here:
http://otn.oracle.com/software/tech/java/sqlj_jdbc/htdocs/jdbc10203.html

commons-lang.jar

This jar contains various utility classes for use in math, string and time operations.
Documentation and related information is located here:
<http://jakarta.apache.org/commons/lang/>

dom4j.jar

This jar contains XML DOM processing ability. It is needed for processing of the configuration file in xml format. Documentation and related information is located here:
<http://www.dom4j.org/>

commons-collections.jar

This jar contains various utility classes for use with the Java collection API. Documentation and related information is located here:

<http://jakarta.apache.org/commons/collections/>

commons-logging.jar

This jar contains various utility classes for use with Java Logging. It provides an additional abstraction layer to common logging functionality. Documentation and related information is located here: <http://jakarta.apache.org/commons/logging/>