

**Oracle® Retail Warehouse Management System**

Operations Guide

Release 13.2

January 2011

Copyright © 2011, Oracle and/or its affiliates. All rights reserved.

Primary Author: Chaitra Ramaprasad

Contributing Author:

Contributor: Patrick Schefers

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this software or related documentation is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation shall be subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License (December 2007). Oracle USA, Inc., 500 Oracle Parkway, Redwood City, CA 94065.

This software is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications which may create a risk of personal injury. If you use this software in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure the safe use of this software. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software in dangerous applications.

Oracle is a registered trademark of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

This software and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

#### **Value-Added Reseller (VAR) Language**

##### **Oracle Retail VAR Applications**

The following restrictions and provisions only apply to the programs referred to in this section and licensed to you. You acknowledge that the programs may contain third party software (VAR applications) licensed to Oracle. Depending upon your product and its version number, the VAR applications may include:

(i) the **MicroStrategy** Components developed and licensed by MicroStrategy Services Corporation (MicroStrategy) of McLean, Virginia to Oracle and imbedded in the MicroStrategy for Oracle Retail Data Warehouse and MicroStrategy for Oracle Retail Planning & Optimization applications.

(ii) the **Wavelink** component developed and licensed by Wavelink Corporation (Wavelink) of Kirkland, Washington, to Oracle and imbedded in Oracle Retail Mobile Store Inventory Management.

(iii) the software component known as **Access Via™** licensed by Access Via of Seattle, Washington, and imbedded in Oracle Retail Signs and Oracle Retail Labels and Tags.

(iv) the software component known as **Adobe Flex™** licensed by Adobe Systems Incorporated of San Jose, California, and imbedded in Oracle Retail Promotion Planning & Optimization application.

You acknowledge and confirm that Oracle grants you use of only the object code of the VAR Applications. Oracle will not deliver source code to the VAR Applications to you. Notwithstanding any other term or condition of the agreement and this ordering document, you shall not cause or permit alteration of any VAR Applications. For purposes of this section, "alteration" refers to all alterations, translations, upgrades, enhancements, customizations or modifications of all or any portion of the VAR Applications including all reconfigurations, reassembly or reverse assembly, re-engineering or reverse engineering and recompilations or reverse compilations of the VAR Applications or any derivatives of the VAR Applications. You acknowledge that it shall be a breach of the agreement to utilize the relationship, and/or confidential

information of the VAR Applications for purposes of competitive discovery.

The VAR Applications contain trade secrets of Oracle and Oracle's licensors and Customer shall not attempt, cause, or permit the alteration, decompilation, reverse engineering, disassembly or other reduction of the VAR Applications to a human perceivable form. Oracle reserves the right to replace, with functional equivalent software, any of the VAR Applications in future releases of the applicable program.



---

---

# Contents

<b>Send Us Your Comments</b> .....	ix
<b>Preface</b> .....	xi
Audience .....	xi
Documentation Accessibility .....	xi
Related Documents .....	xii
Customer Support .....	xii
Review Patch Documentation .....	xii
Oracle Retail Documentation on the Oracle Technology Network .....	xiii
Conventions .....	xiii
<b>1 Overview</b>	
<b>2 System Administration</b>	
<b>Creating the rdmusr Account on the Operating System</b> .....	2-1
<b>Creating Operating System Accounts for Other Users</b> .....	2-2
<b>Creating Users in Oracle</b> .....	2-3
<b>Creating User Accounts</b> .....	2-3
<b>Radio Frequency Operations</b> .....	2-3
<b>Operating System Functions</b> .....	2-4
Printer Queues .....	2-4
Operating System Scheduled Jobs .....	2-4
Daemon Process .....	2-5
File Management (Directories) .....	2-6
<b>3 DBA Administration Module</b>	
<b>Display Locks on Tables</b> .....	3-2
<b>Display Table Information</b> .....	3-2
<b>Display Rollback Information</b> .....	3-4
<b>Display Index Information</b> .....	3-5
<b>Display Sequences Information</b> .....	3-6
<b>Display the Error Log</b> .....	3-7
<b>View Error Log Details</b> .....	3-9
<b>Delete Error Log Records</b> .....	3-9

## 4 Batch Management

Security .....	4-2
----------------	-----

## 5 Subsystem Interfaces

<b>Batch File Formats</b> .....	5-1
<b>Unit Pick System Files</b> .....	5-2
Allocation Data Download .....	5-2
Inbound Carton Download .....	5-2
Process UPS Upload .....	5-2
<b>Pick By Light Interface</b> .....	5-3
Files and Directories .....	5-3
Download Transactions .....	5-4
Destination Container Download.....	5-4
Distribution Item Download .....	5-5
Inventory Adjustment Download .....	5-6
Upload Transactions.....	5-7
Ship Destination Upload.....	5-7
Distro Item Upload .....	5-7
Expected Source Container Upload .....	5-8
Source Container Upload.....	5-9
<b>Sortation Subsystem Interface</b> .....	5-9
Files and Directories .....	5-9
Download Transactions .....	5-10
Container Divert Message .....	5-10
Upload Transactions.....	5-10
Container Divert Instruction Message.....	5-10
<b>Manifest Mailing System</b> .....	5-11
Files and Directories .....	5-11
MMS Views .....	5-12
MMS Container View.....	5-12
MMS Container Item View.....	5-13
<b>Rapistan Socket Interface</b> .....	5-13
Triggers.....	5-13
create_sorter_instruction_trg .....	5-13
appt_rec_dir_trig.....	5-13
cont_dest_trg.sql .....	5-14
Packages .....	5-14
process_diverts_a.sql.....	5-14
receiving_upload.osp .....	5-14
divert_confirmation.osp.....	5-14
ship_lane_upload.osp.....	5-14
pack_wave_release_upload.osp .....	5-14
unit_control_sorter_upload.osp.....	5-14
combine_wip_codes.osp .....	5-14
receive_container2.osp .....	5-14
Tables .....	5-14
Sorter_Intake.....	5-14

<b>Third Party Routing Interface</b> .....	5-15
Packages .....	5-15
ship_cube_inquiry.pkg.....	5-15
route_data_upload.pkg.....	5-15
de_sort_picks.osp.....	5-15
route_data_upload.sh and route_data_upload.sql .....	5-16
Download Transactions .....	5-16
Upload Transactions.....	5-16
Distro Route Upload.....	5-17
Carrier Service Route Upload .....	5-17
Route Date Upload .....	5-18
Route Dest Upload.....	5-18

## **6 Appendix: Error Codes**

<b>Detail of Procedures</b> .....	6-1
<b>Appendix: Error Codes</b> .....	6-1
Error Codes in Numerical Order .....	6-1
Error Codes in Alphabetical Order.....	6-11

## **Index**



---

---

# Send Us Your Comments

Oracle® Retail Warehouse Management System Operations Guide, Release 13.2

Oracle welcomes customers' comments and suggestions on the quality and usefulness of this document.

Your feedback is important, and helps us to best meet your needs as a user of our products. For example:

- Are the implementation steps correct and complete?
- Did you understand the context of the procedures?
- Did you find any errors in the information?
- Does the structure of the information help you with your tasks?
- Do you need different information or graphics? If so, where, and in what format?
- Are the examples correct? Do you need more examples?

If you find any errors or have any other suggestions for improvement, then please tell us your name, the name of the company who has licensed our products, the title and part number of the documentation and the chapter, section, and page number (if available).

---

---

**Note:** Before sending us your comments, you might like to check that you have the latest version of the document and if any concerns are already addressed. To do this, access the Online Documentation available on the Oracle Technology Network Web site. It contains the most current Documentation Library plus all documents revised or released recently.

---

---

Send your comments to us using the electronic mail address: [retail-doc\\_us@oracle.com](mailto:retail-doc_us@oracle.com)

Please give your name, address, electronic mail address, and telephone number (optional).

If you need assistance with Oracle software, then please contact your support representative or Oracle Support Services.

If you require training or instruction in using Oracle software, then please contact your Oracle local office and inquire about our Oracle University offerings. A list of Oracle offices is available on our Web site at <http://www.oracle.com>.



---

---

# Preface

This Operations Guide provides critical information about the processing and operating details of Oracle Retail Warehouse Management System (RWMS), including the following:

- System configuration settings
- Technical architecture
- Functional integration dataflow across the enterprise
- Batch processing

## Audience

This guide is for:

- Systems administration and operations personnel
- Systems analysts
- Integrators and implementers
- Business analysts who need information about Product processes and interfaces

## Documentation Accessibility

Our goal is to make Oracle products, services, and supporting documentation accessible to all users, including users that are disabled. To that end, our documentation includes features that make information available to users of assistive technology. This documentation is available in HTML format, and contains markup to facilitate access by the disabled community. Accessibility standards will continue to evolve over time, and Oracle is actively engaged with other market-leading technology vendors to address technical obstacles so that our documentation can be accessible to all of our customers. For more information, visit the Oracle Accessibility Program Web site at <http://www.oracle.com/accessibility/>.

### Accessibility of Code Examples in Documentation

Screen readers may not always correctly read the code examples in this document. The conventions for writing code require that closing braces should appear on an otherwise empty line; however, some screen readers may not always read a line of text that consists solely of a bracket or brace.

### **Accessibility of Links to External Web Sites in Documentation**

This documentation may contain links to Web sites of other companies or organizations that Oracle does not own or control. Oracle neither evaluates nor makes any representations regarding the accessibility of these Web sites.

### **Access to Oracle Support**

Oracle customers have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/support/contact.html> or visit <http://www.oracle.com/accessibility/support.html> if you are hearing impaired.

## **Related Documents**

For more information, see the following documents in the Oracle Retail Warehouse Management System Release 13.2 documentation set:

- *Oracle Retail Warehouse Management System Data Model*
- *Oracle Retail Warehouse Management System Installation Guide*
- *Oracle Retail Warehouse Management System Online Help*
- *Oracle Retail Warehouse Management System Radio Frequency User Guide*
- *Oracle Retail Warehouse Management System Release Notes*
- *Oracle Retail Warehouse Management System User Interface User Guide*
- Oracle Retail Integration Bus documentation

## **Customer Support**

To contact Oracle Customer Support, access My Oracle Support at the following URL:

<https://support.oracle.com>

When contacting Customer Support, please provide the following:

- Product version and program/module name
- Functional and technical description of the problem (include business impact)
- Detailed step-by-step instructions to re-create
- Exact error message received
- Screen shots of each step you take

## **Review Patch Documentation**

When you install the application for the first time, you install either a base release (for example, 13.2) or a later patch release (for example, 13.2.2). If you are installing the base release, additional patch, and bundled hot fix releases, read the documentation for all releases that have occurred since the base release before you begin installation. Documentation for patch and bundled hot fix releases can contain critical information related to the base release, as well as information about code changes since the base release.

# Oracle Retail Documentation on the Oracle Technology Network

Documentation is packaged with each Oracle Retail product release. Oracle Retail product documentation is also available on the following Web site:

[http://www.oracle.com/technology/documentation/oracle\\_retail.html](http://www.oracle.com/technology/documentation/oracle_retail.html)

(Data Model documents are not available through Oracle Technology Network. These documents are packaged with released code, or you can obtain them through My Oracle Support.)

Documentation should be available on this Web site within a month after a product release.

## Conventions

The following text conventions are used in this document:

<b>Convention</b>	<b>Meaning</b>
<b>boldface</b>	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
monospace	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.



---

---

# Overview

RWMS is a warehouse management system that provides all of the tools necessary to control a modern Distribution Center (DC). RWMS optimizes the flow of merchandise and resources at the DC, fulfillment center, or warehouse. RWMS functionality enables fulfillment across multiple channels. The Web architecture extends functionality and visibility to remote facilities and trading partners via the Internet.

Decision support tools help plan using facility resources efficiently and monitoring existing activities and merchandise flow. Radio frequency (RF) terminals make real-time inventory control and task management possible.

The table-driven functionality supports a variety of business formats and industries, enabling the system to change as the business changes.

## Features

RWMS delivers a functional match to distribution management requirements, including:

- Trailer/yard management
- Inbound freight scheduling
- Carrier compliance tracking
- Receiving and pre-distribution with inbound processing
- Cross-docking, flow-through, and stock
- Full ASN functionality
- Web-based vendor ASN entry
- Quality assurance (QA) with vendor compliance tracking
- Inventory control
- Inventory management
- Item maintenance, management, and profiling
- Customer returns
- Return to vendor (RTV)
- Value-added services
- Distribution and resource planning
- Radio frequency picking and packing
- Paper picking

- 
- Task management
  - Shipping and EDI manifesting

**Hardware and Software Requirements**

See the *Oracle Retail Warehouse Management System Installation Guide* for information about the following:

- Hardware and software requirements
- Oracle Retail application software compatibility

---



---

## System Administration

Each system user must have a unique logon ID to the operating system, Oracle, and RWMS. This chapter describes how you can create each of these accounts and contains the following sections:

- [Creating the rdmusr Account on the Operating System](#)
- [Creating Operating System Accounts for Other Users](#)
- [Creating Users in Oracle](#)
- [Creating User Accounts](#)
- [Radio Frequency Operations](#)
- [Operating System Functions](#)

### Creating the rdmusr Account on the Operating System

This account is created on the application server.

When RWMS is first installed, the group rdm is created, and the users rdmhost and rdmusr are created. The rdmusr user's home directory is typically /home/rdmusr, and the rdmhost user's home directory is typically /home/rdmhost.

```
#!/bin/ksh
#Run this to set the environment variables to compile forms for rwms13instDAN.
echo "
This is the forms profile for the rwms13instDAN environment. This profile will
export the variables needed to compile forms and menus.
To manually recompile an object run:
. /u00/webadmin/rwms13instDAN/base/forms.profile
and then run the following command:
# /u00/webadmin/product/10.3.3/WLS_Forms/as_1/forms/templates/scripts/frmcmp_
batch.sh userid=\$UP module_type=form_or_menu_or_library module=module_name
"
LC_ALL=UTF-8; export LC_ALL
ORACLE_HOME=/u00/webadmin/product/10.3.3/WLS_Forms/as_1; export ORACLE_HOME
ORACLE_INSTANCE=/u00/webadmin/product/10.3.3/WLS_Forms/asinst_1; export ORACLE_
INSTANCE
UP=@rwms13instDAN; export UP
NLS_LANG=AMERICAN_AMERICA.UTF8; export NLS_LANG
TNS_ADMIN=/u00/webadmin/rwms13instDAN/base/.wallet; export TNS_ADMIN
ORACLE_TERM=vt220; export ORACLE_TERM
TERM=vt220; export TERM
PATH=$ORACLE_INSTANCE/bin:/u00/webadmin/rwms13instDAN/base/forms_
scripts:/u00/webadmin/product/10.3.3/WLS_Forms/as_
1/bin:/u00/webadmin/product/10.3.3/WLS_Forms/wlserver_
```

```
10.3/server/bin:/u00/webadmin/product/10.3.3/WLS_Forms/modules/org.apache.ant_
1.7.1/bin:/vol.rtk/java/oracle_linux/jdk1.6.0_
18.64bit/jre/bin:/vol.rtk/java/oracle_linux/jdk1.6.0_
18.64bit/bin:/u00/webadmin/product/10.3.3/WLS/jdk1.6.0_
18.64bit/bin:/vol.rtk/java/oracle_linux/java1.5.0_10/bin:./vol.rtk/java/oracle_
linux/java1.5.0_
10/bin:./usr/kerberos/bin:/usr/local/bin:/bin:/usr/bin:/usr/ccs/bin:/usr/ucb:./v
ol.rtk/tools/bin:/dba/bin:/usr/local/bin:/usr/bin:/etc:/usr/sbin:/usr/ccs/bin:/usr
/ucb:./vol.rtk/tools/bin:/dba/bin:/usr/local/bin:/usr/bin:/etc:/usr/sbin:/u00/web
admin/product/10.3.3/WLS/bin; export PATH
```

```
FORMS_
PATH=/u00/webadmin/rwms13instDAN/base/forms/bin:/u00/webadmin/product/10.3.3/WLS_
Forms/as_1/forms:/u00/webadmin/product/10.3.3/WLS_Forms/asinst_
1/FormsComponent/forms:$ORACLE_HOME/forms:$ORACLE_INSTANCE/FormsComponent/forms;
export FORMS_PATH
```

```
CLASSPATH=/u00/webadmin/product/10.3.3/WLS_Forms/as_
1/jlib/importer.jar:/u00/webadmin/product/10.3.3/WLS_Forms/as_
1/jlib/debugger.jar:/u00/webadmin/product/10.3.3/WLS_Forms/as_
1/jlib/utj.jar:/u00/webadmin/product/10.3.3/WLS_Forms/as_
1/jlib/ewt3.jar:/u00/webadmin/product/10.3.3/WLS_Forms/as_
1/jlib/share.jar:/u00/webadmin/product/10.3.3/WLS_Forms/as_
1/jlib/dfc.jar:/u00/webadmin/product/10.3.3/WLS_Forms/as_
1/jlib/help4.jar:/u00/webadmin/product/10.3.3/WLS_Forms/as_1/jlib/oracle_
ice.jar:/u00/webadmin/product/10.3.3/WLS_Forms/as_1/jlib/jewt4.jar; export
CLASSPATH
```

```
FORMS_BUILDER_CLASSPATH=$CLASSPATH
TK_UNKNOWN=/u00/webadmin/product/10.3.3/WLS_Forms/as_1/guicommon/tk/admin; export
TK_UNKNOWN
LOGDIR=/u00/webadmin/rwms13instDAN/base/log; export LOGDIR
ERRDIR=/u00/webadmin/rwms13instDAN/base/error; export ERRDIR
RDMUSR=rdm username
export RDMUSR
RDMPWD=rdm password
export RDMPWD
SORTATION_DIR=/u01/app/rdm/hostcomm/sortation;
export SORTATION_DIR
DOWNLOAD_DIR=/u01/app/rdm/hostcomm/download;
export DOWNLOAD_DIR
UPLOAD_DIR=/u01/app/rdm/hostcomm/upload;
export UPLOAD_DIR
```

---

**Note:** The value for fields shown in *italics* (above) must be set to the value appropriate for the installation.

---

## Creating Operating System Accounts for Other Users

Create the user account in the operating system. The default shell should be ksh. The home directory should be /home/rdmusr, or whatever directory was assigned to the rdmusr. This prevents each user from having an individual home directory and makes the maintenance of the .profile easier.

Use whatever security measures are appropriate for the installation. The user may use the operating system's security provisions for password expiration.

RWMS enforces access control over the System screens regardless of the operating system security measures.

## Creating Users in Oracle

Use the Oracle facility, such as Server Manager (svrmgrl), to create accounts in Oracle.

Set the default tablespace to USERS and the temporary tablespace to TEMP. The user's name must be the same as the account name on the operating system. The user's password must be the same as the user's name. Grant the new user the wms\_user role. It has all the sufficient privileges to operate on all application tables.

Use the following SQL syntax to create new user accounts in Oracle:

```
create user rdmusr identified by <password>
temporary tablespace TEMP;
grant wms_user to rdmusr;
default tablespace USERS
```

## Creating User Accounts

Add the user in RWMS, using the User Table Editor screen. The password the user specifies in the system can be the same as or different than the user's operating system password.

## Radio Frequency Operations

Radio Frequency users must login to a terminal server through remote desktop on Radio Frequency (RF) devices to launch the RF application. The terminal server is configured for each user. When a user logs to a terminal server, Internet Explorer is launched in Kiosk mode and RF device selection menu is displayed. The RF launch menu is configured for each user during installation and has 4 options:

- Hand Held
- Truck Mount
- Wrist Mount
- Close

Users must select an option configured for the type of device they are logging into. When an option is selected, an application URL is launched that is specific to an entry on the formsweb.cfg file (configured during installation). This allows users to set specific environment variables for the type of device that is being used during implementation.

The close option calls a web page with an active x control that executes the c:/WINDOWS/system32/shutdown.exe executable file and completely shuts down the session on the terminal server and returns the users to the RF devices operating screen.

---

**Note:**

- The terminal server administrator must set up Internet Explorer to allow active X control so the user is not prompted or blocked from running it.
  - The terminal server must be configured based on the business practices of the client to handle instances when the user is involuntarily disconnected from the system.
- 

## Operating System Functions

This section describes the print queues, cron jobs, daemon process, and system parameters.

### Printer Queues

Create print queues in the operating system for reports and labels. RWMS does not embed any printer-specific commands in jobs being sent to report printers. Non-Label printer queues are typically defined as standard ASCII devices. For label printers, raw xml data is sent through a filter that converts it to ZPL (Zebra Programming Language). All label printers must be able to interpret ZPL text.

The names of the printer queues are specified on the System Parameter screen. Please also refer to the System Parameters section for more discussion of those parameters. The names of the parameters are listed here:

- pick\_audit\_queue
- pick\_label\_queue
- pick\_package\_queue
- recv\_audit\_queue
- recv\_label\_queue
- recv\_receipt\_queue
- reprint\_label\_queue
- ship\_bol\_queue
- ship\_label\_queue
- unit\_pick\_lbl\_queue

### Operating System Scheduled Jobs

This table describes the programs that should be run periodically to remove obsolete data from the system, schedule locations for cycle counting, close appointments, upload data, download data, and so forth. The user should run these programs using the operating system facility (cron) for scheduling jobs for unattended operation.

In the table, the name of the program to run is listed under the column heading "Name." The programs are in the \$RDM\_BIN directory. For each routine, a system parameter exists that specifies the number of days of data to retain. These parameters are maintained on the System Parameter editor, which is described in the *Oracle Retail Warehouse Management System User Guide*.

The rdmhost user must submit the jobs. The user's cron should first execute the .profile to set the environmental variables.

**Table 2-1 Programs that must be run through cron job**

<b>Name</b>	<b>Purpose</b>	<b>Parameters</b>	<b>Frequency</b>
capacity_replen.sh	Releases on-hold replenishments destined for Forward Pick locations.	facility_id	Every several minutes
dc_view.sh	Refreshes data in the DC VIEW and DC UTILIZATION tables.	facility_id	Once daily
insert_distribution_queue.sh	Works with the Automate wave processing.	facility_id	Every several minutes or time that meets customer needs.
inv_bal_upload_b.sh	Create an inventory balance upload file for each facility id, part of the facility type.	facility_id	Once daily
maintain_wave_stats.sh	Updates wave statistics.		Every 15 minutes
run_dcplan.sh	Populates planned production activity data into the dc_plan_data table, which is used for the Operational Overview screen.	facility_id	Once or twice a day at the beginning of the working day
run_distribution.sh	Matches inventory to allocation requests, creates pick directives and prints picking packages (if applicable).		Manually or every 15 minutes
run_kpidata.sh	Populates actual production data into the operational_data_store table, which is used for the Operational Overview screen	facility_id	Every 15 minutes
schedule_cycle_count_b.sh	Schedules cycle counts (SS) for the DC.	Cycle_count_period	Once daily
schedule_rop_distribution.sh	Schedules a Re-Order Point distribution run.		Every 5 minutes
update_daily_wh_stats_b.sh	Updates statistics for daily warehouse activities.		Once daily
unreconciled_appt_monitor.sh	Closes any unreconciled appointments that had all labels scanned or nulled.	None	Hourly
purge_rwms_tables.sh	Executes a number table purges.	facility_id	Once daily

## Daemon Process

One daemon process must be run continuously. It should be run by the user rdmhost from the \$RDM\_BIN directory. The Calling Syntax includes the parameter -s, which is the sleep time in seconds: how often the daemon should wake up and look for inducted or diverted cartons. A typical value is between 10 and 30 seconds. In the Calling Syntax, <user\_name/password> refers to an Oracle user and password.

**Table 2–2 Daemon Process**

Name	Description	Calling Syntax
Read_divert_data	Loads the sorter intake table from a data file.	read_divert_data <username/password> <facility_id>-s[n]

## File Management (Directories)

Discusses permissions and any file cleanup (purging needed for each directory).

**Table 2–3 File Management**

Directory	Path	Purpose	Perm	Purging
Base Directory	\$RDM	This is the base directory that other directories branch from.	775	None
Reports	\$RDM/reports It is present on the application server where the Forms Server directory is located. (/u00/webadmin/product/10.3.3/WLS/user_projects/domains/ClassicDomain/servers/WLS_FORMS/tmp/_WL_user/formsapp_11.1.1/e18uoi/war/rwms/reptemp/)	Temporary holding area for reports. Only non label reports that are executed using the RWMS GUI application are sent here. All the other reports are routed and managed by BI Publisher processing and configurations.	777	Occasional (weekly)
Host Download	\$DOWNLOAD_DIR	Temporary holding area for files to download and log files.	775	Occasional (weekly)
Host Upload	\$UPLOAD_DIR	Temporary holding area for files to upload.	775	Occasional (weekly)
Sortation	\$SORTATION_DIR		775	Occasional (weekly)
BIN	\$RDM/bin	Holds all executables.	755	None
INSTALL	\$RDM_ADMIN/create	Holds files used to build the system.	755	None

---

---

## DBA Administration Module

The DBA Administration module allows the DBA Administrator to monitor database information such as table locks, tablespace, indices, and errors.

The chapter describes how to display locks on tables, table information, tablespace information, rollback information, index information, sequence information, and the error log.

The following procedures are included in this section:

- [Display Locks on Tables](#)
- [Display Table Information](#)
- [Display Rollback Information](#)
- [Display Index Information](#)
- [Display Sequences Information](#)
- [Display the Error Log](#)
- [View Error Log Details](#)
- [Delete Error Log Records](#)

## Display Locks on Tables

The user can use the Display Locks on Tables to display the status of the tables.

1. Select the DBA Administration menu.
2. Select the Display Locks on Tables option. The Display Locks on Tables is displayed.

**Figure 3–1 Main Menu > DBA Administration > Display Locks on Tables Screen**

TABLE NAME	USER_NAME	STATUS	TYPE
I_COL2	webadmin	HELD	OTHER
I_USER#	oracle	HELD	OTHER
C_TS#	webadmin	HELD	OTHER
C_TS#	oracle	HELD	OTHER
I_OBJ#	webadmin	HELD	OTHER
I_OBJ#	oracle	HELD	OTHER
I_OBJ#	oracle	HELD	OTHER
IND\$	webadmin	HELD	OTHER
IND\$	oracle	HELD	OTHER
UET\$	webadmin	HELD	OTHER
UET\$	oracle	HELD	OTHER
COL\$	oracle	HELD	OTHER
I_USER1	webadmin	HELD	OTHER
I_CDEF4	webadmin	HELD	OTHER
I_CDEF2	webadmin	HELD	OTHER
I_PROXY_ROLE_DATA\$_1	oracle	HELD	OTHER
I_TS#	oracle	HELD	OTHER
I_TS1	webadmin	HELD	OTHER
I_PROXY_ROLE_DATA\$_2	webadmin	HELD	OTHER
I_PROXY_ROLE_DATA\$_2	oracle	HELD	OTHER
CLU\$	webadmin	HELD	OTHER
CLU\$	oracle	HELD	OTHER
I_CCOL1	webadmin	HELD	OTHER
C_OBJ#	webadmin	HELD	OTHER
C_OBJ#	oracle	HELD	OTHER
CCOL\$	webadmin	HELD	OTHER
I_UNDO1	webadmin	HELD	OTHER
CDEF\$	webadmin	HELD	OTHER

3. Click the exit button to close the window.

## Display Table Information

The user can use the Display Table Information option to display specific table information.

---


**Note:** The user can monitor the number of extents to detect table growth. A large extent value indicates possible table fragmentation. If the number of extents approaches the maximum, the table should be rebuilt.

---

1. Select DBA Administration > Display Table Information.
2. In the Display Table Information window, click the enter query button.
3. In the Find Table query field, enter the name of the table, or click the LOV button and select the table.

- Click the execute query button. The details of the selected table appear.

**Figure 3–2 Main Menu > DBA Administration > Display Table Information Screen**

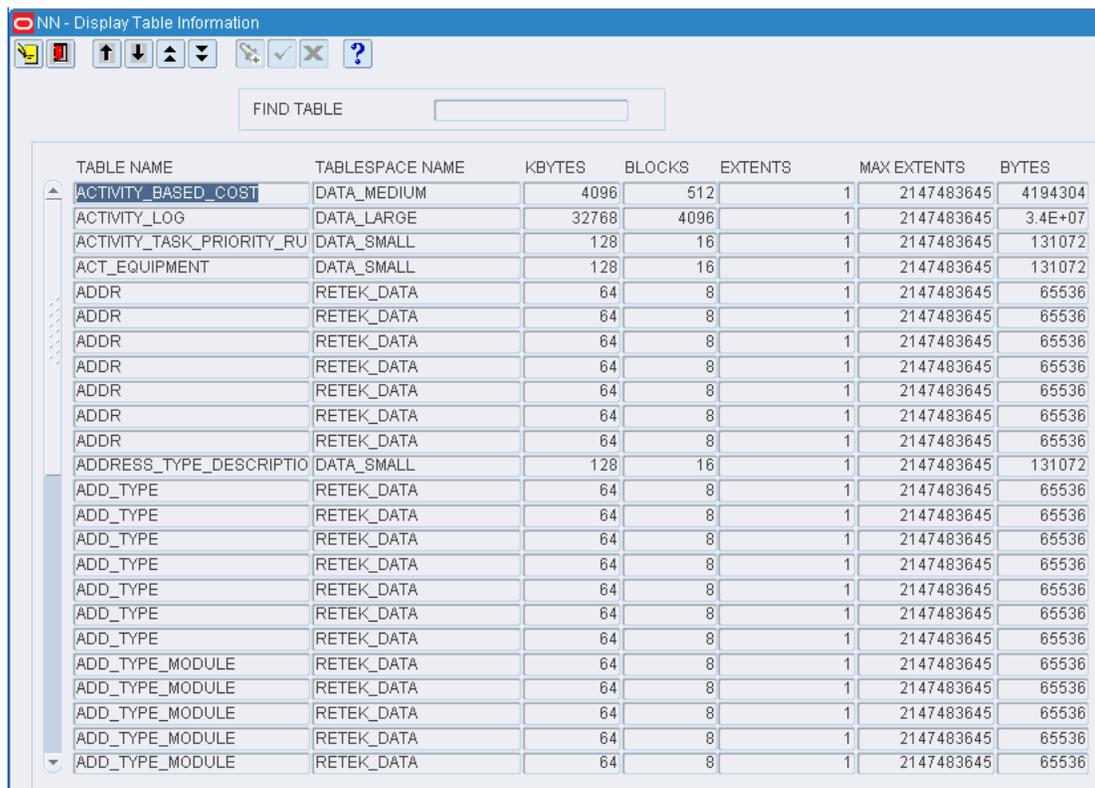

The fields on the Display Table Information screen are explained in the Table 4-1:

**Table 3–1 Fields on the Table Information Screen**

Field Name	Field Description
Find Table	Table name for table to be queried.
Table Name	Name of the database table.
Tablespace Name	Tablespace name.
Kbytes	Number of (K) bytes in the table.
Blocks	Number of blocks the table is using.
Extents Cur.	Current table extents.
Extents Max	Maximum allowable table extents.

**Note:** If the user wants to display information about a particular table, enter the specific table name at the Find Table field. The user can also enter a partial table name. For example, the user can enter APP to display all tables that begin with these letters.

- Click the Exit button to close the Display Table Information screen.

## Display Rollback Information

The user can use the Display Rollback Information option to display information about rollbacks. The user can also use this information to determine whether the rollback segments need to be enlarged for a specific installation.

1. Select the DBA Administration > Display Rollback Information. The Display Rollback Information screen is displayed, along with all rollback segments.

**Figure 3–3 Main Menu > DBA Administration > Display Rollback Information Screen**

ROLLBACK SEGMENT	INCREASE RB	KSIZE	EXTENTS	XACTS	WAITS	GETS	OPTSIZE	STATUS	RSSIZE
SYSTEM	NO	392	5	0	0	7602		ONLINE	401408
_SYSSMU1\$	NO	1144	3	0	7	177028		ONLINE	1171456
_SYSSMU2\$	NO	1144	3	0	19	177035		ONLINE	1171456
_SYSSMU3\$	NO	1144	3	0	11	223649		ONLINE	1171456
_SYSSMU4\$	NO	8312	3	0	7	172531		ONLINE	8511488
_SYSSMU5\$	NO	2168	4	0	10	177562		ONLINE	2220032
_SYSSMU6\$	NO	1144	3	0	11	230695		ONLINE	1171456
_SYSSMU7\$	NO	1144	3	0	7	171070		ONLINE	1171456
_SYSSMU8\$	NO	1144	3	0	6	177653		ONLINE	1171456
_SYSSMU9\$	NO	1144	3	0	10	227585		ONLINE	1171456
_SYSSMU10\$	NO	1144	3	0	7	179517		ONLINE	1171456
_SYSSMU11\$	NO	1144	3	0	20	186261		ONLINE	1171456

The fields on the Display Rollback Information screen are explained in the Table 4-2:

**Table 3–2 Fields on the Display Rollback Information Screen**

Field Name	Field Description
Rollback Segment	Name of the rollback segment.
Increase RB	Indicates when additional rollback segments need to be added. YES = rollback segments should be added. NO = rollback segments do not need to be added.
KSize	Size of rollback segments in bytes.
Extents	The number of times that the rollback segment had to acquire a new extent
XACTS	Number of Active Transactions
WAITS	The number of rollback segment header requests that resulted in waits
GETS	The number of rollback segment header requests

**Table 3–2 (Cont.) Fields on the Display Rollback Information Screen**


Field Name	Field Description
OPTSIZE	The value of the optimal parameter for the rollback segment
STATUS	Status (Online/Offline)
RRSIZE	Rollback Size

2. Click the **Exit** button to return to the Display Rollback Information screen.

## Display Index Information

The user can use the Display Index Information option to display sizing information for the database indexes. The user can use this information to analyze the growth of the database indexes, which can indicate table growth.

1. Select DBA Administration > Display Index Information.
2. Click the enter query button. In the Target Index query field, enter the name of the index or click the LOV button and select the index. Select the The Display Index Information screen is displayed.
3. Click the execute query button. The details of the selected index appear.

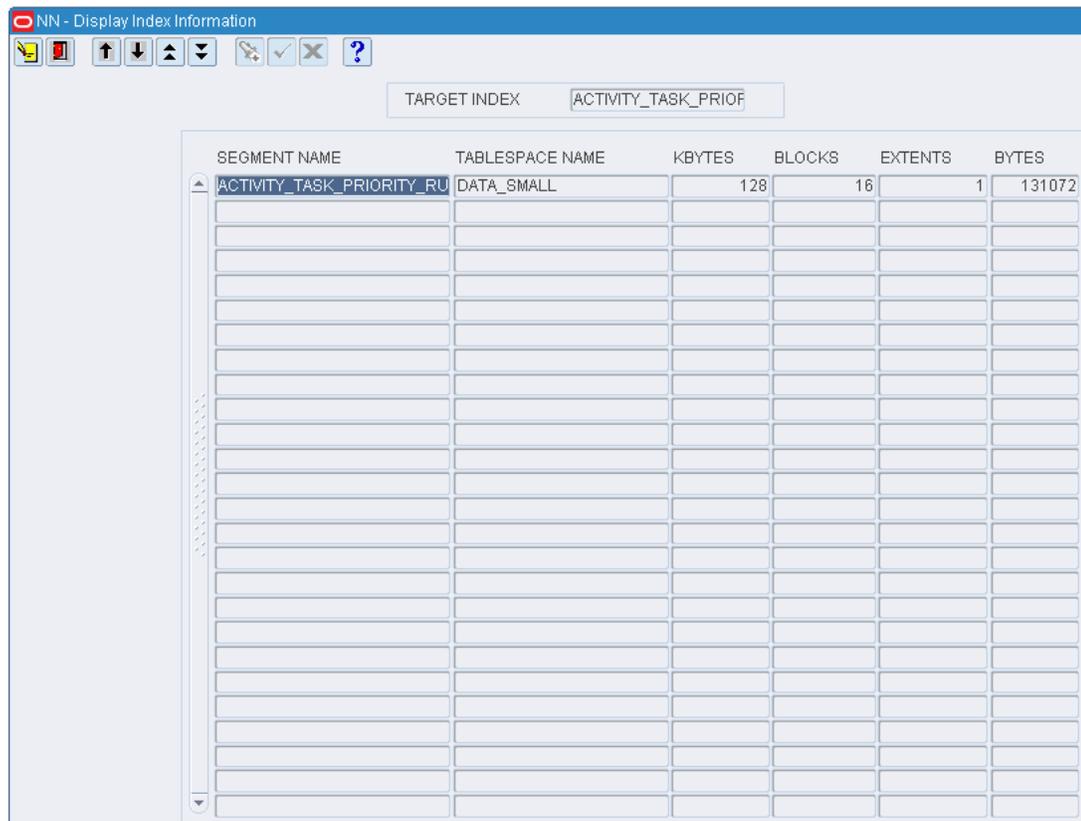**Figure 3–4 Main Menu > DBA Administration > Display Index Information Screen**

The fields on the Display Index Information screen are explained in the Table 4-3:

**Table 3–3 Fields on the Display Index Information Screen**

Field Name	Field Description
Target Index	Index name user wishes to query.
Segment Name	Name of index.
Tablespace Name	Tablespace name where the index resides.
Kbytes	Size of index in kilobytes.
Blocks	Number of blocks the index is using (1 block = 4096 bytes).
Extents	Current number of index extents.
Bytes	Size of index in bytes.

## Display Sequences Information

The user can use the Display Sequence Information option to display sizing information specific to the sequences used by the system. The user can use this information to determine whether a sequence is being called as many times as originally planned.

1. Select DBA Administration > Display Sequences Information. The Display Sequences Information screen is displayed, along with the sequence information already entered into the system.

**Figure 3–5 Main Menu > DBA Administration > Display Sequences Information Screen**

The screenshot shows a window titled "NN - Display Sequences Information" with a toolbar and a table of sequence data. The table has columns for SEQUENCE NAME, MIN VALUE, MAX VALUE, INCREMENT BY, LAST NUMBER, and CYCLE FLAG. The data includes various system sequences such as MGMT\_RESPONSE\_CAPTURE\_ID, WM\$UP\_DEL\_TRIG\_NAME\_SEQUE, and others, with their respective values and cycle flags.

SEQUENCE NAME	MIN VALUE	MAX VALUE	INCREMENT BY	LAST NUMBER	CYCLE FLAG
MGMT_RESPONSE_CAPTURE_ID	1	1.000000E+27	1	1	<input type="checkbox"/>
MGMT_RESPONSE_SNAPSHOT_ID	1	1.000000E+27	1	21	<input type="checkbox"/>
WM\$UP_DEL_TRIG_NAME_SEQUE	1	1.000000E+27	1	173	<input type="checkbox"/>
WM\$INSTEADOF_TRIGS_SEQUEN	1	1.000000E+27	1	173	<input type="checkbox"/>
WM\$LOCK_SEQUENCE	1	1.000000E+27	2	346	<input type="checkbox"/>
WM\$VTID	1	1.000000E+27	1	173	<input type="checkbox"/>
WM\$ADT_SEQUENCE	1	1.000000E+27	1	173	<input type="checkbox"/>
WM\$VERSION_SEQUENCE	1	1.000000E+27	1	173	<input type="checkbox"/>
WM\$ROW_SYNC_ID_SEQUENCE	1	1.000000E+27	1	11	<input type="checkbox"/>
WM\$UDTRIG_DISPATCHER_SEQU	1	1.000000E+27	1	173	<input type="checkbox"/>
AQ\$ WM\$EVENT_QUEUE_TABLE_	1	1.000000E+27	1	1	<input type="checkbox"/>
EXF\$IDXOBJSEQ	1	1.000000E+27	1	1	<input type="checkbox"/>
DR_ID_SEQ	1	1.000000E+27	1	1040	<input type="checkbox"/>
MSG_ID_SEQ	1	1.000000E+27	1	1000	<input type="checkbox"/>
THS_SEQ	1	1.000000E+27	1	1	<input type="checkbox"/>
XDB\$PROPNUM_SEQ	1	1.000000E+27	1	2313	<input type="checkbox"/>
XDB\$NAMESUFF_SEQ	1	9999	1	93	<input checked="" type="checkbox"/>
RIB_MESSAGE_SEQ	1	99999999	1	1	<input type="checkbox"/>
RIB_MESSAGE_SEQ	1	99999999	1	4821	<input type="checkbox"/>
TRANSSHIPMENT_NBR_SEQ	1	999999999	1	1	<input checked="" type="checkbox"/>
APPT_DTL_SEQ	1	999999999	1	66001	<input checked="" type="checkbox"/>
UNIT_LABEL_SEQ	1	1.000000E+27	1	1	<input type="checkbox"/>
TICKET_NBR_SEQ	1	999999999	1	1001	<input checked="" type="checkbox"/>
ACTIVITY_BASED_COST_SEQ	1	1.000000E+25	1	1	<input checked="" type="checkbox"/>
ASN_UPLOAD_SEQ	1	1.000000E+27	1	34001	<input type="checkbox"/>
EQUIP_CLASS_UPLOAD_SEQ	1	1.000000E+27	1	12001	<input type="checkbox"/>
RECEIPT_NBR_SEQ	1	999999999	1	42001	<input checked="" type="checkbox"/>
WD_ID_SEQ	0	1.000000E+27	1	45001	<input type="checkbox"/>

The fields on the Display Sequences Information screen are explained in the Table 4-4:

**Table 3-4 Fields on Display Sequences Information Screen**

Field Name	Field Description
Sequence Name	Name of the database sequence.
Min Value	Minimum value of the sequence.
Max Value	Maximum value of the sequence.
Increment By	Increment, amount the sequence increases after each use.
Last Number	Last sequence value used. Some sequences cache the values in memory so this number does not increase until the cache is empty and a new group of numbers is cached into memory.
Cycle Flag	Cycle, whether the sequence rolls back to minimum value when the maximum value is reached.


2. Click the **Exit** button to close the Display Sequences Information screen.

## Display the Error Log

Display Error Log option to display, view details, and delete logged errors. These are unanticipated errors or errors occurring in background processes. The user can select Reports-> Print Reports menu option (available from any RWMS screen) in the windows toolbar and then use the Error Log report in BI Publisher to print the error log.

1. Select DBA Administration > Display Error Log.
2. Enter the query. The Display Error Log screen is displayed as shown below.

**Figure 3–6 Main Menu > DBA Administration > Display Error Log Screen**

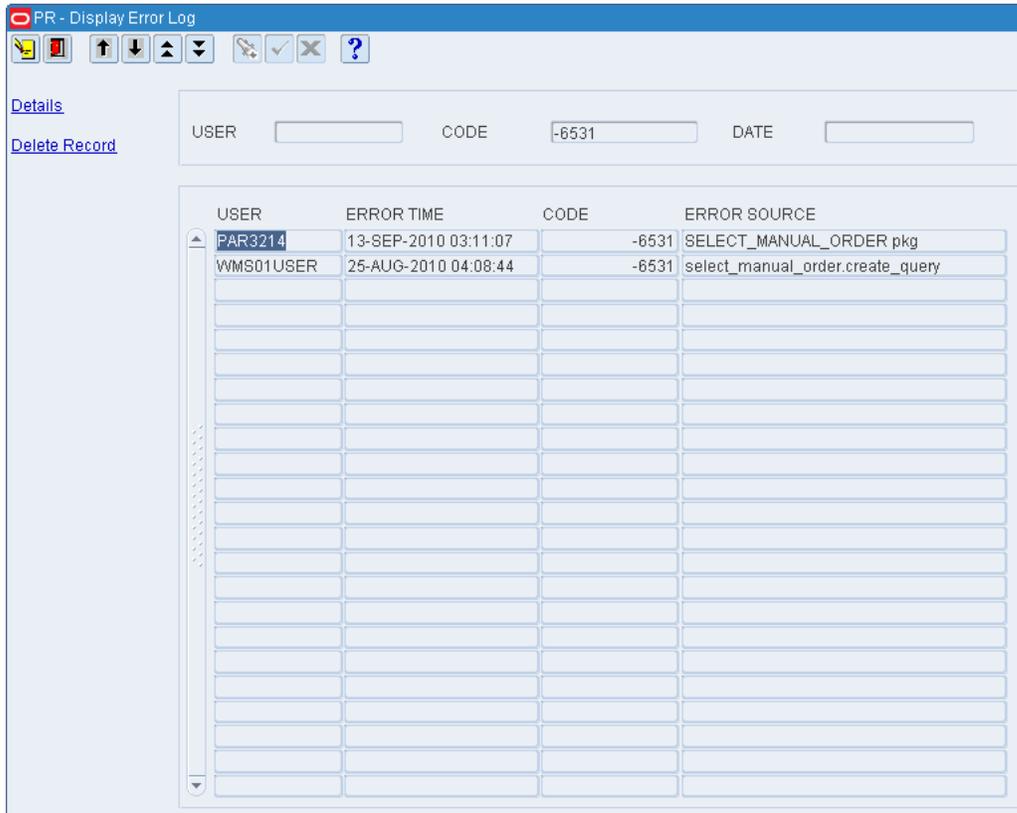

The fields on the Display Error Log screen are explained in the Table 4-5:

**Table 3–5 Fields on the Display Error Log Screen**

Field Name	Field Description
User, Code, Date	Enter any combination of user, error code, or error date to search for records.
User	User identification.
Error Time	The date and time the error was logged.
Code	The error code.
Error Source	Program where the error originated

3. Click the execute query button to display a list of all existing errors.

---

**Note:** To display the errors for a particular user, enter the user name in the User field.

---

4. To display a specific error for a particular user, enter the user name in the User field and the error code in the Code field.
5. To display a specific error for a specific user for a particular date, enter the user name in the User field, the error code in the Code field, and the date in the Date field.

---



---

**Note:** RWMS accepts any combination of the above fields.

---



---

## View Error Log Details

1. Select DBA Administration > Display Error Log.
2. Enter the user, error code, or date to view and click the execute query button.
3. Select the record to view in more detail, using the keypad arrow keys to move up and down the list, and then click the **Details** button. The Error Log screen is displayed.

**Figure 3–7** Main Menu > DBA Administration > Display Error Log > Details screen

The screenshot shows a window titled 'NN - Details'. It contains several input fields and a button. The fields are: USER (PAR3214), TIME (29-JAN-2009 02:49:25), CODE (0), ERROR SOURCE (Wave\_Status\_S), LOCATION ID (Change\_Wave\_Status), and MESSAGE (Wave 101 Successfully Closed). At the bottom center, there is a button labeled 'Exit/Cancel'.

The fields on the Details screen are explained in the Table 4-6:

**Table 3–6** Fields on the Error Log Screen

Field Name	Field Description
User	Identification of the user who had the error.
Time	Date and time the error was logged.
Code	The error code.
Source	The program in which the error originated.
Location	The location within the source program where the error occurred.
Message	Full text of the error message.

4. Click the **Cancel** button to close the Details screen.

## Delete Error Log Records

1. Select DBA Administration > Display Error Log.
2. Click the enter query button or the LOV button to enter the options in the user, error code, or date to delete.
3. Click the execute query button. A list of all errors are displayed.
4. Select the record to delete, using the keypad arrow keys to move up and down the list, and then click the Delete Record link. A message box asks to confirm the deletion. The message reads:

Confirm Delete Operation (Yes/No)

5. Click **Yes** to delete the error log record.

## Batch Management

This chapter describes the batch programs that should be run periodically to remove obsolete data from the system, to schedule locations for cycle counting, and to close appointments that are now reconciled. You should run these programs using the operating system facility (cron) for scheduling jobs for unattended operation.

In the following table, the name of the program to run is listed under the column heading *Name*. The programs are in the *\$RDM\_BIN* directory. For each routine, a system parameter exists that specifies the number of days of data to retain. These parameters are maintained on the System Parameter editor.

The *rdmhost* user must submit the jobs. The user's cron should first execute the *.profile* to set the environmental variables.

**Table 4-1 Batch Programs**

Name	Purpose	Parameters	Frequency
capacity_replen.sh	Releases on-hold replenishments destined for Forward Pick locations.	facility_id	Every several minutes
dc_view.sh	Refreshes data in the DC VIEW and DC UTILIZATION tables.	facility_id	Once daily
insert_distribution_queue.sh	Works with the Automate wave processing.	facility_id	Every several minutes or time that meets customer needs.
inv_bal_upload_b.sh	Create an inventory balance upload file for each facility id, part of the facility type.	facility_id	Once daily
maintain_wave_stats.sh	Updates wave statistics.		Every 15 minutes
run_dcplan.sh	Populates planned production activity data into the dc_plan_data table, which is used for the Operational Overview screen.	facility_id	Once or twice a day at the beginning of the working day
run_distribution.sh	Matches inventory to allocation requests, creates pick directives and prints picking packages (if applicable).		Manually or every 15 minutes
run_kpidata.sh	Populates actual production data into the operational_data_store table, which is used for the Operational Overview screen	facility_id	Every 15 minutes

**Table 4–1 Batch Programs**

<b>Name</b>	<b>Purpose</b>	<b>Parameters</b>	<b>Frequency</b>
schedule_cycle_count_b.sh	Schedules cycle counts (SS) for the DC.	Cycle_count_ period	Once daily
schedule_rop_distribution.sh	Schedules a Re-Order Point distribution run.		Every 5 minutes
update_daily_wh_stats_b.sh	Updates statistics for daily warehouse activities.		Once daily
unreconciled_appt_monitor.sh	Closes any unreconciled appointments that had all labels scanned or nulled.	None	Hourly
purge_rwms_tables.sh	Executes a number table purges.	facility_id	Once daily

## Security

RWMS Batch programs can be run using wallet alias as the first parameter to the batch command line arguments. This is enabled to prevent the security concerns around exposing database user id and password while running the batch programs. For more information about wallet creation, refer to the *Oracle Retail Warehouse Management System Installation Guide*.

The wallet and wallet alias creation is a pre-requisite to use batch programs in secured mode. For batch programs, RDMUSR and RDMPWD variables are used. If we assume wallet alias is "dvols29\_rwms01batch", usage is as follows:

```
Export TNS_ADMIN=/projects/rwms13.2/dev/forms
```

```
Export ORACLE_WALLET_ENTRY=dvols29_wms01user
```

```
Export RMDUSR =
```

```
Export RDMPWD = @dvols29_rwms01batch
```

RWMS batch programs use a concatenation of RDMUSR/RDMPWD to execute the batch programs. When @<wallet\_entry> is set as RMDPWD the end result is /@<wallet\_entry>.

For wallet alias dvols29\_rwms01batch, end result is /@ dvols29\_rwms01batch.

---



---

## Subsystem Interfaces

This chapter consists of the following:

- [Batch File Formats](#)
- [Unit Pick System Files](#)
- [Pick By Light Interface](#)
- [Sortation Subsystem Interface](#)
- [Manifest Mailing System](#)
- [Rapistan Socket Interface](#)
- [Third Party Routing Interface](#)

### Batch File Formats

All batch files passed between an outside system and RWMS consist of one or more records in the upload or download files. These records contain printable ASCII characters (with space characters between each field) and are of a fixed length based on the transaction type.

Fields that are defined within transaction records have an associated template that defines the arrangement, length, and logical content of the field. They appear as one of the following types:

**Table 5–1** *Different Types of Fields*

Template	Meaning
A	A character data type.
N	A numbered digit (0 through 9).
N(p)	An unsigned p-digit number.
N(p)vN(q)	A fixed point number with a decimal point, p digits to the left of the decimal and q digits to the right.
sN(p)	A p-digit number that has a sign ('+' or '-') as its first significant character.
X	An alphanumeric character.
X(p)	A p-character string.
YYYYMMDDHHMI	A date/time, with a 4-digit year followed by a 2-digit month followed by a 2-digit day followed by a 2-digit hour, a 24 hour format, followed by a 2-digit minute.

---



---

**Note:** Numeric fields are always right justified with leading zeros. Character fields are left justified with trailing blanks, unless otherwise stated.

---



---

## Unit Pick System Files

### Allocation Data Download

This file specifies the outstanding store orders to be fulfilled to the Unit Pick System.

**Table 5–2 Store Orders**

Field Description	Template	Destination
Facility id (dc)	X (2)	Code for the DC
Unit pick system code	X (4)	Code for Unit Pick System
Wave number	N (3)	Unique identifier of wave
Item id	X (25)	Unique identifier of the item.
Dest id	X (10)	Identifier of the ship destination.
Unit qty	N (8) v N (4)	Number of units
Logical chute	X (10)	Logical chute assigned to group
Group id	N (4)	Identifier for a set of orders
Slot	N (3)	Identifier with a group associated to an order
To container id	X (20)	System generated container ID merchandise to be packed

### Inbound Carton Download

This file specifies the carton content and the associated wave to the Unit Pick System.

**Table 5–3 Carton Content**

Field Description	Template	Destination
Facility id (dc)	X (2)	Code for the DC
Unit pick system code	X (4)	Code for Unit Pick System
Wave number	N (3)	Unique identifier of wave
Container id	X (20)	Unique identifier of the source container.
Item id	X (25)	Unique identifier of the item.
Requested unit qty	N (8) v N (4)	Number of units

### Process UPS Upload

This file serves as a notification from a Unit Pick System to RWMS concerning contents of a picked container, the associated wave number and the outbound destination ID.

**Table 5–4 Notification**

Field Description	Template	Destination
Facility ID (DC)	X (2)	Code for the DC
Transaction Date/Time	YYYYMMDD HH24MI	Date and time this record was created.
Wave Number	N (3)	Unique identifier of wave
Container ID	X (20)	Unique identifier of the container.
Item ID	X (25)	Unique identifier of the item
Distributed Unit Qty	N (8) v N (4)	Number of distributed units
Dest ID	X (10)	Identifier of the ship destination.

## Pick By Light Interface

The Pick By Light system (PBL) requires a variety of information from a host in order to drive its paperless picking processes. These transactions are sent periodically; the frequency is determined by the urgency of the transaction type. The host is either RWMS or, as in standalone operations, some other application. Data is exchanged through text files. With text file data exchange, PBL is not concerned with the specifics of how the files were created or how they arrived in the upload or download directories. Each customer selects an approach to suit the preferred communication methods.

## Files and Directories

All download files are placed in a directory that is named by the UNIX environment variable `DOWNLOAD_DIR`. All upload files are placed in a directory that is named by the UNIX environment variable `UPLOAD_DIR`.

The download and upload files have set names as listed in the following table. The files are listed in the order in which they are run because each download may depend upon a previous one.

**Table 5–5 Files and Directories**

Interface Name	Script Name	File Name
Destination Container Download	dest_container_download.sh	dest_container_download.dat dest_cont_item_download.dat
Distribution Item Download	distro_item_download.sh	distro_item_download.dat
Inventory Adjustment Download	inv_adj_download.sh	inv_adj_download.dat
Ship Destination Download	pps_ship_dest_upload.sh	ship_dest_upload.dat
Distro Item Upload	create_distro_item_upload.sh	distro_item_upload.dat
Expected Source Container Upload	create_exp_container_upload.sh	exp_container_upload.dat
Source Container Upload	generate_source_container_upld.sh	source_container_upload.dat

## Download Transactions

The PBL downloads include several fields that are future use. These fields are included to allow for the future growth in RWMS and to allow the PBL to work standing alone, without RWMS. PBL download errors are recorded in the local RWMS error log, and are not uploaded to the host. The user can view and maintain this log in the Error Log screen.

### Destination Container Download

The Destination Container download files are built by PBL for use by RWMS. They contain PBL built containers and the items and quantities in them that are added back to inventory or shipped. If the destination is marked as the DC, the container is sent to stock; otherwise, a distribution is assumed, and the container is routed appropriately. When PBL has finished creating the files, they are first copied to the download directory by PBL. Then, the script in RWMS for this download is started by PBL. The script reads the files, loads the data into RWMS, and adds the container information to RWMS.

The Destination Container Download consists of a Header file and a Detail file.

The Header file, which describes the container, has the following format:

**Table 5–6 Destination Container Download**

Field Description	Template	Description
Transaction Date/Time	YYYYMMDD HH24MISS	Date and time this record was created (future use)
Record Type	A	Record type in PBL. Always a Z for a Destination Container Download header record (future use).
Facility ID	X (2)	Identifier for the facility.
Company Number	N (1)	Company Number (future use).
Destination ID	X (10)	Identification of the ship destination.
Container ID	X (20)	Identifier for the container.
Destination Name	X (30)	Descriptive name of the ship destination (future use).
Address 1	X (30)	First address line of the ship destination (future use).
Address 2	X (30)	Second address line of ship destination (future use).
Address 3	X (30)	Third address line of the ship destination (future use).

The Detail file, which describes the contents of the closed picking container, has the following format:

**Table 5–7 Detail File**

Field Description	Template	Description
Transaction Date/Time	YYYYMMDD HH24MISS	Date and time this record was created (future_use).

**Table 5-7 (Cont.) Detail File**

Field Description	Template	Description
Record Type	A	Record type in PBL. Always a Y for a Destination Container Download detail (future use).
Facility ID	X (2)	Identifier for the facility.
Container ID	X (20)	Identifier for the container.
Distribution/Order Number	X (10)	Identifier for the distribution or order.
Item ID	X (25)	Identifier for the item.
Unit Qty	N (8) v N (4)	Unit quantity that was picked for this item.
Item Description	X (60)	Text description of the item (future use).

Errors due to data integrity with the download are recorded in the error log and the record is ignored. Possible errors include:

- Facility ID does not exist in RWMS.
- Container already exists in RWMS.
- Non-existent Destination ID.
- Duplicate Item ID/Distro Nbr (or Item/Order) on the container detail.
- Non-existent Item ID.

### Distribution Item Download

The Distribution Item Download file is built by PBL and sent to RWMS. Therefore, pick directive records are deleted and stock allocations adjusted as needed. When PBL has finished creating the files, they are first copied to the download directory by PBL. Then the script in RWMS for this download starts by PBL. The script reads the file, loads the data into RWMS, and updates the picking information in RWMS as required.

The format for the Distribution Item Download is as follows:

**Table 5-8 Distribution Item Download**

Field Description	Template	Description
Transaction Date/Time	YYYYMMDD HHMISS	Date and time this record was created (future use).
Record Type	A	Record type in PPS. Always an X for a Destination Container Download header record (future use).
Facility ID	X (2)	Identifier for the facility.
Company Number	N (1)	Company Number (future use).
Distro Number	X (10)	Identifier for the distribution or order.
Item ID	X (25)	Identifier for the item.
Destination ID	X (10)	Identifier for the shipping destination.

**Table 5–8 (Cont.) Distribution Item Download**

Field Description	Template	Description
Requested Unit Qty	N (8) v N (4)	Number of units of this item requested for picking.
Distributed Unit Qty	N (8) v N (4)	Number of units of this item actually picked.

Errors due to data integrity with the download are recorded in the error log and the record is ignored. Possible errors include:

- Non-existent Facility ID.
- Non-existent Destination ID.
- Non-existent Item ID.
- No pick for the distro/item/destination.

### Inventory Adjustment Download

The Inventory Adjustment Download file is built by PBL and sent to RWMS when there is a difference between the quantity sent on the Source Container Upload and the actual quantity picked. RWMS validates the data in the file and sends the information in an Inventory Adjustment Upload to the host system. This is the only action RWMS takes on this; no change in RWMS data occurs. After PBL creates the files, they are copied to the download directory by PBL. Then PBL starts the script in RWMS, or this download. The script reads the files, validates the data, and inserts the information into the Inventory Adjustment Upload table in RWMS for upload to the host (reason code to the host for this adjustment is 30).

The format for the Inventory Adjustment Download is as follows:

**Table 5–9 Inventory Adjustment Download**

Field Description	Template	Description
Transaction Date/Time	YYYYMMDD HHMISS	Date and time this record was created (future use).
Record Type	A	The record type in PBL. This is always sent as W for an Inventory Adjustment Download (future use).
Facility ID	X (2)	Identifier for the facility.
Company Number	N (1)	A single digit number for the company. This is a new system parameter in RWMS (future use).
Distro Number	X (10)	The identifier for the distribution (future use).
Item ID	X (25)	The identifier for the item.
Adjusted Unit Qty	sN (8) v N (4)	The difference between source container units and the number of units of this item actually picked. A positive number means more were picked than expected; a negative number means fewer were picked than expected.

Errors due to data integrity with the download are recorded in the error log and the record is ignored. Possible errors include:

- Non-existent Item ID.

## Upload Transactions

### Ship Destination Upload

The Ship Destination Upload file is spooled from the Shipping Destination table and sorted by Facility ID, Company Number, and Shipping Destination. This file is empty unless an adjustment action (add/modify/delete) is sent to RWMS from the host, or performed in the Destination Editor screen. Whenever an adjustment is performed, all shipping destinations that RWMS knows about are sent to PBL via the upload. Thus, this upload is an all or nothing data file.

The format for the Ship Destination Upload is as follows:

**Table 5–10 Ship Destination Upload**

Field Description	Template	Description
Transaction Date/Time	YYYYMMDD HHMISS	Date and time this record was created.
Record Type	A	Record type in PBL. Always an 'A' for a Ship Destination Upload.
Facility ID	X (2)	Identifier for the facility.
Company Number	N (1)	Company Number.
Destination ID	X (10)	Identification of the ship destination.
Destination Name	X (30)	Descriptive name of the ship destination.
Address 1	X (30)	First address line of the ship destination.
Address 2	X (30)	Second address line of ship destination.
Address 3	X (30)	Third address line of the ship destination.

### Distro Item Upload

The Distro Item Upload file contains records that indicate to PBL which items, and how many, are shipped to specified destinations. After the distribution process runs, this file is built from all remaining sorted allocation records that are eligible to be processed by PBL (the item does not have a FPL defined). Records are sorted by facility number, company number, distribution/order number, item, distro/order creation time stamp, and shipping destination.

The format for the Distro Item Upload is as follows:

**Table 5–11 Distro Item Upload**

Field Description	Template	Description
Transaction Date/Time	YYYYMMDD HHMISS	Date and time this record was created.

**Table 5–11 (Cont.) Distro Item Upload**

Field Description	Template	Description
Record Type	A	Record type in PBL. Always a B for a Distro Item Upload.
Facility ID	X (2)	Identifier for the facility.
Company Number	N (1)	Company Number.
Distro Number	X (10)	Identifier for the distribution or order.
Item ID	X (25)	Identifier for the item.
Distro Create Date/Time	YYYYMMDD HHMISS	Date and time the distribution/order was created
Destination ID	X (10)	Identifier for the shipping destination.
Unit Qty	N (8) v N (4)	Number of units of this item to be shipped.
Item Dept	X (4)	Department of the item.
Item Description	X (60)	Item description.

### Expected Source Container Upload

This Expected Source Container Upload file contains records identifying all Inventory containers necessary to fulfill the PBL requirements determined by the last distribution run. This information is used by PBL to know ahead of time what containers are needed by PBL. This file is built after each distribution run. Records are sorted by facility number, company number, distribution/order number, item, distribution/order creation time stamp, and container ID.

The format of the Expected Source Container Upload is as follows:

**Table 5–12 Expected Source Container Upload**

Field Description	Template	Description
Transaction Date/Time	YYYYMMDD HH24MISS	Date and time this record was created.
Record Type	A	Record type in PBL. Always a C for an Expected Source Container Upload.
Facility ID	X (2)	Identifier for the facility.
Company Number	N (1)	Company Number.
Distro Number	X (10)	Identifier for the distribution or order.
Item ID	X (25)	Identifier for the item.
Distro Create Date/Time	YYYYMMDD HH24MISS	Date and time the distribution/order was created.
Container ID	X (20)	Identifier for the container.
Requested Qty	N (8) v N (4)	Unit quantity that is requested for picking of this item.

## Source Container Upload

The Source Container Upload file is built as PBL Source containers are picked and dropped off at the PBL staging area. The upload file is used to match up expected containers with actual source containers delivered to PBL. It has no sorted order.

---

**Note:** The value of Actual Quantity in the Upload is 0 (zero) if the pick was canceled either by the user or indirectly via a system function (such as a location marked for cycle count).

---

The format for the Source Container Upload is as follows:

**Table 5–13 Source Container Upload**

Field Description	Template	Description
Transaction Date/Time	YYYYMMDD HH24MISS	Date and time this record was created.
Record Type	A	Record type in PBL. Always a D for a Source Container Upload.
Facility ID	X (2)	Identifier for the facility.
Container ID	X (20)	Identifier for the container.
Actual Qty	N (8)	Unit quantity in the container.

## Sortation Subsystem Interface

Due to the increased use of UCC-128 labeled containers and the addition of WIP code functionality to RWMS, the Oracle Retail Distribution Management Sortation module now sends container divert instruction messages to the sortation system to control the flow of containers on the conveyor.

Each message that RWMS sends to the sortation system informs it of the next logical destination for a container. The divert instruction could be, but is not limited to, one of the following: any type of processing area, QA sampling, palletization, putaway staging, or shipping lane divert instructions. Initially, a message is sent to the sorter whenever a container is created on RWMS. However, subsequent messages are sent to the sorter if the container is assigned one or more WIP codes. The sortation system is only sent the next logical destination for a container.

The sortation system continues to notify RWMS of any container diverts that occur on the conveyor system. Depending on the type of divert that has taken place, RWMS either attempts to auto-receive, move, or manifest the container.

## Files and Directories

All files are placed in a directory that is named by the UNIX environment variable SORTATION\_DIR. The files have set names as listed below. They are listed in the order in which they should be run because each download may depend upon a previous one.

**Table 5–14 Files and Directories**

Interface Name	Script Name	File Name
Container Divert Download	sorter_dnld.sh	sorter_dnld.dat

**Table 5–14 (Cont.) Files and Directories**

Interface Name	Script Name	File Name
Container Divert Instruction Upload	sorter_upload.sh	sorter_upload.dat

## Download Transactions

### Container Divert Message

The sortation system sends a message when a container is scanned, indicating whether it was scanned as an induction, diverted to a processing area, or diverted to a shipping lane. If the container was inducted, RWMS performs an auto-receiving function. If the container is diverted to a processing area, RWMS updates the location of the container. When a divert to a shipping lane is sent, RWMS adds the container to the manifest for the trailer if one is available. For more details, refer to the RWMS Shipping Module in the *Oracle Retail Warehouse Management System User Guide*.

The Container Divert Message Download file has the following format:

**Table 5–15 Container Divert Message Download**

Field Description	Template	Description
Container ID	X (20)	Identifier of the container.
Divert Type	A	I = Induction D = Shipping Lane Divert.
Logical Destination	X (4)	Area of the DC to which the container was sorted.
Tracking ID	X (25)	Tracking ID (if any) applied to the container by a carrier for tracking purposes.
Divert Timestamp	YYYYMMDD HH24MISS	Date/Time the container was scanned by the sortation system.

## Upload Transactions

### Container Divert Instruction Message

RWMS sends a Container Divert Instruction Message to the sortation system to control the flow of containers on the conveyor system. If a container must be diverted to several areas in the distribution center before it is ready to be putaway or shipped, RWMS only informs the sortation system of the next logical destination for the container. This way, the sortation system does not need to keep track of all divert instructions for a container. The first divert instruction for a container is sent when the container ID is first created on RWMS.

When the receiving allocation module creates a container, RWMS calculates a pallet group identifier in order to provide a palletization operator a quickly recognized code that helps to group cartons together on pallets. RWMS assigns a four-digit number to each PO/Item/Destination and concatenates this with the total number of cartons expected for the pallet group to make up the pallet group identifier.

The Container Divert Instruction Message Upload file has the following format:

**Table 5–16 Container Divert Instruction Message Upload**

Field Description	Template	Description
Container ID	X (20)	Container identifier.
Logical Destination	X (4)	Next area of DC to which the container should be diverted.
Transaction Date/Time	YYYYMMDD/HHMISS	Date/Time of upload to sortation system.

## Manifest Mailing System

The MMS uses the merchandise carton ID to form an Oracle Data Base Compliant (ODBC) query into the RWMS data base. This query gathers the information necessary for generating a shipping label and manifesting the carton.

Merchandise, planned and picked, using the logic currently implemented in RWMS, is first taken to a shipping station. Each shipping station is a PC running a MMS with interfaces to a user interface terminal and often to a scale.

The label applied by the RWMS picker is then scanned to retrieve the carton ID necessary for the ODBC query.

## Files and Directories

In addition to the normal BOL upload records, MMS information is uploaded to the host. This additional information is prepared for upload to the host system upon completion of the normal BOL upload operation.

Each Container ID, pro number combination in the shipment has one detail record in the MMS upload. The BOL Sequence Number is incremental and unique for each BOL.

An MMS upload consists of a single detail file with the following format:

**Table 5–17 Manifest Mailing System**

Field Description	Template	Description
Batch Number	N (7)	Numeric Sequence of the upload
BOL Number	X (17)	BOL number
Container ID	X (20)	Identifier of container
Pro Number	X (18)	Shipper's tracking number
Cube	N (10) v N (2)	Container cube
Weight	N (8) v N (4)	Container weight
Freight	N (6) v N (2)	Freight charge
Markup	N (6) v N (2)	Markup charge
Charge type	X (6)	Carrier charge code
Service Code	X (6)	Carrier service code
Service Level	X (12)	Carrier service level
Tracking ID	X (25)	Tracking ID

## MMS Views

The RWMS data base, which the MMS queries is actually two views: the MMS Container View and the MMS Container Item View.

### MMS Container View

The value in the CARRIER\_SERVICE\_CODE is set by the host system, or it could be blank. If the value is blank, the user must input data at the shipping station. The MMS can change the value of the CARRIER\_SERVICE\_CODE, even if the field is not blank.

RWMS downloads the SHIP\_TO\_ADDRESS with the stock order. If this field is blank in the order download, the information is supplied by the SHIP\_DEST table. The MMS can change the value of the SHIP\_TO\_ADDRESS, even if the field is not blank.

The format of the MMS Container view is as follows:

**Table 5–18 MMS Container**

Field Description	Template	Description
Facility ID	X (2)	Identifier for the facility
Container ID	X (20)	Identifier for the container
Ship Address Description	X (30)	The description (such as store or ship-to name). This is the first line of the address block.
Ship Address1	X (30)	Shipping Address Line 1
Ship Address2	X (30)	Shipping Address Line 2
City	X (25)	Shipping City
State	X (3)	Shipping State
Zip	X (10)	Shipping Zip
Dest ID	X (10)	Destination identifier
Carrier Service Code	X (6)	Carrier service code for the delivery (such as First Class).
Bill Address Description	X (30)	The first line of the address block. A description, such as company or bill-to name.
Bill Address1	X (30)	Billing Address line 1
Bill Address2	X (30)	Billing Address line 2
Bill Address3	X (30)	Billing Address line 3
Amount1	N (8) v N (4)	Amount Charge 1
Amount2	N (8) v N (4)	Amount Charge 2
Amount3	N (8) v N (4)	Amount Charge 3
DL Comment	X (30)	Download comment that is printed on the label (optional).

---

**Note:** A default value using nvl or decode statements should be supplied for any null values.

---

### MMS Container Item View

The data item called DISTRO is analogous to CUSTOMER\_ORDER\_NUMBER in a wholesale system.

The format of the Container Item View is as follows:

**Table 5–19 Container Item View**

Field Description	Template	Description
Facility ID	X (2)	Identifier for the facility
Container ID	X (20)	Container identifier
Item ID	X (25)	Unique item identifier
Unit Qty	N (8) v N (4)	Standard unit quantity for an item
Weight	N (8) v N (4)	Item weight or unit quantity weight
Retail Price	N (16) v N (4)	Retail selling price
Class	X (7)	Class of merchandise (optional)
Distro/Order	X (10)	Unique identifier of a distribution or order
Ticket Type	X (4)	Refers to Ticket Type table (optional)

## Rapistan Socket Interface

RWMS interfaces with Rapistan through socket interfaces. RWMS still generates directives based on logical destination IDs associated to locations setup in RWMS.

For RWMS generated directives (message sent to the control system), a trigger calls stored procedures used in the socket interface for various message types. Different message types are generated depending on where the container is going in the facility due to data required by the control system. RWMS determines the message type and call the appropriate procedure.

For control system confirmations (message received from the control system), divert confirmations are sent to RWMS via stored procedures. Similar to the directive procedures, the upload confirmation procedures is created based on the message type sent from the control system.

## Triggers

### **create\_sorter\_instruction\_trg**

When the Rapistan interface is enabled in RWMS, the trigger calls the socket interface package on the message transfer from RWMS to Rapistan.

### **appt\_rec\_dir\_trig**

When the Rapistan interface is enabled in RWMS, the trigger writes receiving directive records for ASN appointments when the appointment status is updated to PEND.

**cont\_dest\_trg.sql**

Send the destination ID (carrier service) to Rapistan if the destination ID changes for an outbound container.

**Packages****process\_diverts\_a.sql**

Select additional fields from the `sorter_intake` table, in addition to performing palletization logic.

**receiving\_upload.osp**

Accept receiving location directive confirmations from the control system. It inserts records into the `sorter_intake` table to be processed by the `process_diverts_a.sql` script.

**divert\_confirmation.osp**

Accept divert directive confirmations from the control system. It inserts records into the `sorter_intake` table to be processed by the `process_diverts_a.sql` script.

**ship\_lane\_upload.osp**

Accept shipping location directive confirmations from the control system. It inserts records into the `sorter_intake` table to process by the `process_diverts_a.sql` script.

**pack\_wave\_release\_upload.osp**

Receive pack wave release confirmations from the control system. It calls the new `unit_sorter_directive.osp` stored procedure to send unit sortation information to the control system for the pack wave that releases by the control system.

**unit\_control\_sorter\_upload.osp**

Receive unit sorter confirmations from the control system. It updates the `container_item` table for the outbound carton being sorted.

**combine\_wip\_codes.osp**

WIP processing associated with outbound cartons.

**receive\_container2.osp**

Write `receiving_directive` records upon receipt for non-ASN, specified case pack PO receiving.

**Tables****Sorter\_Intake**

This table is used for all container transactions from the control system to RWMS, including inbound, outbound, and movements within the facility.

**Table 5–20 Table for Container Transactions**

Field Name	Field Type	Primary Key?	Req?	Description
facility_id	X (2)	N	N	Facility identifier

**Table 5–20 (Cont.) Table for Container Transactions**

Field Name	Field Type	Primary Key?	Req?	Description
sorter_seq	N (9)	Y	Y	Sorting Sequence
container_id	X (20)	Y	Y	RWMS container identifier
logical_dest_id	X (4)	N	Y	Logical destination ID that relates to a location within RWMS.
divert_type	X (1)	N		
divert_ts	DATETIME	N	N	Date/time stamp
tracking_id	X (25)	N	N	Current field.
pallet_id	N (6)	N	N	Rapistan pallet identifier.
expected_cont_qty	N (6)	N	N	Number of cases on pallet ID.
scale_weight	N (4) v N (3)	N	N	Scale weight
Length	N (4) v N (2)	N	N	Measured length
Width	N (4) v N (2)	N	N	Measured width
Height	N (4) v N (2)	N	N	Measured height
Packer_id	X (10)	N	N	Populated for shipping cartons for audit purposes.

## Third Party Routing Interface

The third party routing interface determines the order in which outbound containers are picked and loaded onto trailers. The estimated cube and weight to be shipped for a given set of stores for a specified ship date is loaded into a file in RWMS for the third party routing system to process. The routing system then defines the routes used for that date and the order in which each store's stock is loaded onto trailers shipped that day. This information is then used in RWMS to determine the order in which outbound containers are picked so that they are loaded in the proper sequence.

## Packages

### **ship\_cube\_inquiry.pkg**

Procedures and functions used to select stock orders based on user-defined criteria, calculate estimated weight and cube by ship destination, populate the Ship Cube Inquiry screen with the results, and generate a route data file used as input for the third party routing system.

### **route\_data\_upload.pkg**

Procedures used to read and process route information returned from the third party routing system and update stock orders with the carrier service route and ship date provided.

### **de\_sort\_picks.osp**

Process used in distribution to order picks on a wave based on the carrier service route and ship date assigned to a stock order by the third party routing system.

**route\_data\_upload.sh and route\_data\_upload.sql**

Batch process used to read data files provided by the third party routing system to create routes and route sequences and then assign a route and ship date to designated stock orders.

**Download Transactions**

RWMS sends a file containing estimated weights and cubes for the ship destinations by stock order number for which picking and shipping occurs on a given ship date. This file is created in the Ship Cube Inquiry screen, and placed in the directory specified in the DOWNLOAD\_DIR environmental variable.

Route data files created have the following naming convention:

route\_data\_facility ID\_YYYYMMDDHH24MISS.dat

where *facility ID* is the 2-character facility identifier and *YYYYMMDDHH24MISS* is a date time stamp from the point of creation. Multiple route data files may be created for a single ship date, though this is not a recommended practice.

The route data file has the format:

**Table 5–21 Format of Route Data File**

Field Name	Field Type	Primary Key?	Req?	Description
Dest_id	X(10)	Y	Y	Ship destination identifier.
Distro_nbr	X(10)	Y	Y	Stock order identifier.
Total_cube	N(10)V(2)	N	N	Total cube for destination ID in the stock order.
Total_weight	N(9)V(3)	N	N	Total weight for destination ID in the stock order.
Ship_date	YYYYMMDD	Y	Y	Date stock is to be picked and shipped.
Order_cube_UDA1	X(10)	N	N	User defined attribute.
Order_cube_UDA2	X(10)	N	N	User defined attribute.
Order_cube_UDA3	X(10)	N	N	User defined attribute.
Order_cube_UDA4	X(10)	N	N	User defined attribute.

**Upload Transactions**

The files created by the third party routing package are placed in a directory named by the UNIX environment variable UPLOAD\_DIR. The files are named with any set of numbers or characters as a prefix, but must end with the following character strings:

**Table 5–22 File Format**

File	File Naming Conventions
Distro Route Upload	...distro_route.dat
Carrier Service Route Upload	...carrier_service_route.dat
Route Date Upload	...route_date.dat
Route Dest Upload	...route_dest.dat

Multiple files named with different prefixes may exist for a single data type (for example, 001\_route\_dest.dat, 002\_route\_dest.dat). RWMS processes spool data from the routing files into corresponding upload tables, then each file processed is renamed with an extension of .baknnn, where nnn is a UNIX session ID.

There are no interdependencies across the four routing upload files. Any or all of them may exist in the upload directory and processed at the same time.

### Distro Route Upload

The distribution route data file contains the ship date, carrier, service, and route codes to assign to a given stock order. The carrier service route must be a valid entry in the carrier\_service\_route table in RWMS.

**Table 5–23 Distribution Route Data File**

Field Name	Field Type	Primary Key?	Req?	Description
Facility_id	X(2)	N	Y	Facility identifier
Transaction_ts	YYYYMMDDHH24MI	N	N	Date time stamp
Distro_nbr	X(10)	N	Y	Stock order identifier
Carrier_code	X(4)	N	Y	Carrier identifier
Service_code	X(6)	N	Y	Service identifier
Route	X(10)	N	Y	Route identifier
Ship_date	YYYYMMDDHH24MI	N	Y	Date stock is to be picked and shipped.
Distro_route_UDA1	X(10)	N	N	User defined attribute
Distro_route_UDA2	X(10)	N	N	User defined attribute
Distro_route_UDA3	X(10)	N	N	User defined attribute
Distro_route_UDA4	X(10)	N	N	User defined attribute
Distro_route_UDA5	X(10)	N	N	User defined attribute
Dest_id	X(10)	N	N	Store or DC dest id
Item_id	X(25)	N	N	Item id/code

### Carrier Service Route Upload

The carrier service route data file contains carrier service route combinations are stored in the RWMS carrier\_service\_route table. Carrier code and route must be valid entries in the carrier and route tables in RWMS respectively.

**Table 5–24 Carrier Service Route Upload**

Field Name	Field Type	Primary Key?	Req?	Description
Facility_id	X(2)	Y	Y	Facility identifier
Transaction_ts	YYYYMMDDHH24MI	N	N	Date time stamp
Carrier_code	X(4)	Y	Y	Carrier identifier
Service_code	X(6)	Y	Y	Service identifier
Route	X(10)	Y	Y	Route identifier

**Table 5–24 (Cont.) Carrier Service Route Upload**

Field Name	Field Type	Primary Key?	Req?	Description
Location_id	X(12)	N	N	Optional location ID where containers for this carrier service route are staged for loading.

### Route Date Upload

The route date upload file contains routes and the order in which they are picked and loaded for a given ship date. If a route coming from the third party routing system is not already defined in the RWMS route table, an entry in this table is created for it.

**Table 5–25 Route Date Upload File**

Field Name	Field Type	Primary Key?	Req?	Description
Facility_id	X(2)	Y	Y	Facility identifier
Transaction_ts	YYYYMMDDHH24MI	N	N	Date time stamp
Route	X(10)	Y	Y	Route identifier
Ship_date	YYYYMMDDHH24MI	Y	Y	Shipping date for which route sequence applies.
Route_sequence	N(3)	N	N	Sequence in which the route is loaded with other routes for the same day.

### Route Dest Upload

The route destination upload file contains all of the ship destinations for a given route and the order in which they are loaded onto a trailer. The route and destination ID values must be valid in The RWMS route and ship\_dest tables respectively.

Ship date is a required entry for each record in the route destination upload file. A default value of 01-Jan-1900 (190001011200) may be used for static route destination sequences that do not change from day to day. Ship destination sequences loaded for any other date are valid only for that ship date.

**Table 5–26 Route Destination Upload File**

Field Name	Field Type	Primary Key?	Req?	Description
Facility_id	X(2)	Y	Y	Facility identifier
Transaction_ts	YYYYMMDDHH24MI	N	N	Date time stamp
Route	X(10)	Y	Y	Route identifier
Dest_id	X(10)	Y	Y	Ship destination identifier
Ship_date	YYYYMMDDHH24MI	Y	Y	Shipping date for which load sequence applies.
Load_sequence	N(3)	N	N	Sequence in which the containers for a given destination ID are loaded with other ship destinations in the same route.

---



---

## Appendix: Error Codes

RWMS maintains many API interfaces to support the downloading of specific data used in the application. These interfaces provide both generic and specific return values to the RIB as each message is consumed. The appendices contain the status codes and error messages returned by the API interfaces.

The first table contains the entire list of return values with the status code in numeric order. The second table contains the same list, with the error messages in alphabetic order.

### Detail of Procedures

Each CONSUME procedure returns both a status code and an error message. When the message is consumed successfully, the status code returns an S, and the error message is NULL.

### Appendix: Error Codes

All error codes pertaining to RIB interface are contained in the RWMSRIB\_ERROR package.

#### Error Codes in Numerical Order

The following table includes error codes in numerical order.

**Table 6–1 Error Codes in Numerical Order**

Error Message	Status Code	Description
k_GENERAL_SUCCESS	S	A message was consumed.
k_GENERAL_API_FAILURE	E	A fatal error occurred in the procedure.
k_GENERAL_INVALID_FACILITY	102	Facility does not exist in the transshipment_setup table.
k_GENERAL_INVALID_ROUTING	103	An invalid destination was passed.
k_GENERAL_PRE_ADDL_PROCESSING	104	An error occurred in pre-additional processing.
k_GENERAL_FACILITY_NOT_FOUND	105	Facility does not exist in the transshipment_setup table.
k_VENDOR_DELETE_ERROR	200	Error while deleting a vendor.

**Table 6–1 Error Codes in Numerical Order**

<b>Error Message</b>	<b>Status Code</b>	<b>Description</b>
k_VENDOR_OVERWRIT_STATUS_ERROR	201	Errors while retrieving overwrite status values.
k_VENDOR_MISSING_ERROR	202	Cannot delete or modify the record because it does not exist.
k_VENDOR_FOUND_ERROR	203	Cannot create record, record already exists.
k_VENDOR_ADDR_IND_UPDATE_ERROR	204	An error occurred updating the primary address indicator.
k_VENDOR_PRIMARY_KEY_ERROR	205	Primary Key Violation.
k_VENDOR_ADDR_PRIM_KEY_ERROR	206	Primary Key Violation.
k_VENDOR_FK_ERROR	207	Referential Integrity error.
k_VENDOR_ADDR_TYPE_UPD_ERROR	208	Unable to update the Vendor Address description.
k_VENDOR_STATE_FK_ERROR	209	Referential Integrity error.
k_VENDOR_ADDR_MISSING_ERROR	210	Cannot delete or modify the record because it does not exist.
k_VENDOR_ADDR_FOUND_ERROR	211	Cannot create record, record already exists.
k_DIFF_ID_MISSING_ERROR	250	Cannot delete or modify the record because it does not exist.
k_DIFF_INSERT_ERROR	251	Diff ID is already being used as a Diff Group ID.
k_DIFF_PRIMARY_KEY_ERROR	252	Primary Key Violation.
k_DIFF_OTHER_ERROR	253	Unanticipated Differentiator error.
k_DIFF_ID_FOUND_ERROR	254	Cannot create record, record already exists.
k_DIFF_GRP_ID_MISSING_ERROR	300	Cannot delete or modify the record because it does not exist.
k_DIFF_GROUP_INSERT_ERROR	301	A Diff Group already exists.
k_DIFF_GROUP_PRIMARY_KEY_ERROR	302	Primary Key Violation.
k_DIFF_GROUP_OTHER_ERROR	303	An error occurred evaluating the Diff Group ID.
k_DIFF_DELETE_DIFF_GROUP_ERROR	304	An error occurred deleting from the Diff Group Detail table.
k_DIFF_GRP_ID_FOUND_ERROR	306	Cannot create record, record already exists.
k_DIFF_GRP_DET_MISSING_ERROR	350	Cannot delete or modify the record because it does not exist.
k_DIFF_GRP_DET_FOUND_ERROR	351	Cannot create record, record already exists.
k_DIFF_GROUP_DET_PRI_KEY_ERROR	352	Primary Key Violation.
k_DIFF_GROUP_DET_DG_FK_ERROR	353	Referential Integrity error.
k_DIFF_GROUP_DET_DI_FK_ERROR	354	Referential Integrity error.

**Table 6–1 Error Codes in Numerical Order**

<b>Error Message</b>	<b>Status Code</b>	<b>Description</b>
k_ITEM_UPC_IND_UPDATE_ERROR	400	An error occurred in updating the primary UPC indicator in item_upc.
k_ITEM_SUPP_IND_UPDATE_ERROR	401	An error occurred updating the item_supplier or item_master tables.
k_ITEM_COUNTRY_IND_UPD_ERROR	402	Error updating item_supp_country primary country indicator.
k_ITEM_OVERWRITE_STATUS_ERROR	403	Error when checking if a column can be overwritten.
k_APPT_DETAIL_POD_FK	404	Referential Integrity error.
k_ITEM_VENDOR_REF_ERROR	405	Foreign key error for vendor when creating an item.
k_ITEMM_PK_ERROR	406	Primary Key Violation.
k_ITEMM_UOM_FK_ERROR	407	Referential Integrity error.
k_ITEMM_VDR_FK_ERROR	408	Referential Integrity error.
k_ITEMM_CT_FK_ERROR	409	Referential Integrity error.
k_ITEMM_UPS_FK_ERROR	410	Referential Integrity error.
k_ITEMM_WC_FK_ERROR	411	Referential Integrity error.
k_ITEMUPC_PK_ERROR	412	Primary Key Violation.
k_ITEMUPC_IM_FK_ERROR	413	Referential Integrity error.
k_ITEMUPC_UNIQUE_ERROR	414	Unique error on item_upc UPC number when modifying a record.
k_ITEM_DIFF_PK_ERROR	415	Primary Key Violation.
k_ITEM_SUPP_PK_ERROR	416	Primary Key Violation.
k_ITEM_SUPP_IM_FK_ERROR	417	Referential Integrity error.
k_ITEM_SUPP_VDR_FK_ERROR	418	Referential Integrity error.
k_ISC_PK_ERROR	419	Primary Key Violation.
k_ISC_IS_FK_ERROR	420	Referential Integrity error.
k_ISCD_PK_ERROR	421	Primary Key Violation.
k_ISCD_ISC_FK_ERROR	422	Referential Integrity error.
k_ITEMA_PK_ERROR	423	Primary Key Violation.
k_ITEMA_ATTR_FK_ERROR	424	Referential Integrity error.
k_ITEMA_IM_FK_ERROR	425	Referential Integrity error.
k_PICKFROMLOC_ITEMM_FK_ERROR	426	Referential Integrity error.
k_PICKFROMLOC_LOC_FK_ERROR	427	Referential Integrity error.
k_STOCKA_ITEMM_FK_ERROR	428	Referential Integrity error.
k_ITEMMCP_IM_FK_ERROR	429	Referential Integrity error.
k_ITEMMCP_CURR_FK_ERROR	430	Referential Integrity error.

**Table 6–1 Error Codes in Numerical Order**

<b>Error Message</b>	<b>Status Code</b>	<b>Description</b>
k_ITEM_SCD_OTHER_ERROR	431	Error while updating the dimensions of an item.
k_ITEM_CREATE_OTHER_ERROR	432	Unanticipated error while creating an item.
k_ITEM_SUPP_MOD_OTHER_ERROR	433	Unanticipated error while modifying an item.
k_ITEM_SUPP_ITEM_CRE_OTH_ERROR	434	Unanticipated error while modifying the item.
k_ITEM_MOD_MSG_OTHER_ERROR	435	Unanticipated error when modifying an item, item differentiator.
k_ITEM_MISSING_ERROR	436	Cannot delete or modify the record because it does not exist.
k_ITEM_FOUND_ERROR	437	Error when item is created. Item already exists.
k_ITEM_SUPPLIER_MISSING_ERROR	438	Cannot delete or modify the record because it does not exist.
k_ITEM_SUPPLIER_FOUND_ERROR	439	Cannot create record, record already exists.
k_ITEM_SUPP_CTR_MISSING_ERROR	440	Cannot delete or modify the record because it does not exist.
k_ITEM_SUPP_CTR_FOUND_ERROR	441	Cannot create record, record already exists.
k_ITEM_SUPP_CTR_DIM_MISS_ERROR	442	Cannot delete or modify the record because it does not exist.
k_ITEM_SUPP_CTR_DIM_FND_ERROR	443	Cannot create record, record already exists.
k_ITEM_UPC_MISSING_ERROR	444	Cannot delete or modify the record because it does not exist.
k_ITEM_UPC_FOUND_ERROR	445	Cannot create record, record already exists.
k_ITEM_UDA_MISSING_ERROR	446	Cannot delete or modify the record because it does not exist.
k_ITEM_UDA_FOUND_ERROR	447	Cannot create record, record already exists.
k_ITEM_BOM_MISSING_ERROR	448	Cannot delete or modify the record because it does not exist.
k_ITEM_BOM_FOUND_ERROR	449	Cannot create record, record already exists.
k_ITEM_DIFF_FOUND_ERROR	451	Cannot create record, record already exists.
k_ITEM_ATTR_DEFAULTS_ERROR	452	Error when creating item and processing the attributes.
k_ITEMBOM_COMP_MSTR_SAME_ERROR	453	MasterItemID is the same as the ComponentItemID.

**Table 6–1 Error Codes in Numerical Order**

<b>Error Message</b>	<b>Status Code</b>	<b>Description</b>
k_ITEMBOM_CHECKING_ERROR	454	Error occurred checks to see if the MasterItemID is the same as the ComponentItemID.
k_ITEM_CLASS_ERROR	457	Error applying Item Download class.
k_PO_VENDOR_REF_ERROR	503	Error on the vendor foreign key reference when creating a record.
k_PO_PK_ERROR	504	Primary Key Violation.
k_PO_DETAIL_PK_ERROR	505	Primary Key Violation.
k_PO_DETAIL_PO_ERROR	506	Error on the foreign key reference to PO from PO details when creating a PO detail.
k_PO_DETAIL_ITEM_ERROR	507	Error on the foreign key reference to item from PO details when creating a PO detail.
k_PO_RECEIPT_FK_ERROR	508	Referential Integrity error.
k_PO_CRE_MOD_OTHER_ERROR	509	Unanticipated error while creating a PO.
k_PO_FOUND_ERROR	512	Cannot create record, record already exists.
k_PO_MISSING_ERROR	513	Cannot delete or modify the record because it does not exist.
k_PO_DETAIL_FOUND_ERROR	514	Cannot create record, record already exists.
k_PO_DETAIL_MISSING_ERROR	515	Cannot delete or modify the record because it does not exist.
k_PO_DELIVER_DATE_ERROR	516	Error on the deliver date while creating a PO.
k_PO_CNTRY_VENDOR_ITEM_ERROR	517	PO record exists, cannot delete Vendor.
k_PO_OTHER_ERROR	521	Error validating PO detail required fields.
k_PO_STATUS_CANNOT_CLOSE_ERROR	524	Error trying to Close a PO where an unreceived appointment exists.
k_PO_STATUS_CHECKING_ERROR	525	Error checking appointment information.
k_ATTRIBUTE_FOUND_ERROR	554	Cannot create record, record already exists.
k_ATTRIBUTE_MISSING_ERROR	555	Cannot delete or modify the record because it does not exist.
k_ATTRIBUTE_OTHER_ERROR	556	Unanticipated error occurred while validating the key.
k_ATTRIBUTE_TYPE_PK_ERROR	559	Primary Key Violation.
k_ATTRIBUTE_TYPE_FK_ERROR	560	Referential Integrity error.
k_ATTRIBUTE_DETAIL_FOUND_ERROR	600	Attribute record already exists.

**Table 6–1 Error Codes in Numerical Order**

<b>Error Message</b>	<b>Status Code</b>	<b>Description</b>
k_ATTRIBUTE_DETAIL_MISS_ERROR	601	Cannot delete or modify the record because it does not exist.
k_ATTRIBUTE_DETAIL_PK_ERROR	603	Primary Key Violation.
k_ATTRIBUTE_DET_ITEM_FK_ERROR	604	Referential Integrity error.
k_ATTRIBUTE_DET_WIP_FK_ERROR	605	Referential Integrity error.
k_SHIP_OVERWRITE_STATUS_ERROR	650	Error retrieving ship destination overwrite status information.
k_SHIP_DEST_TYPE_NOT_VAL_ERROR	651	An error occurred checking the ship destination type.
k_SHIP_OWNING_DC_ERROR	652	Owning DC not found.
k_SHIP_DEST_FOUND_ERROR	653	Cannot create record, record already exists.
k_SHIP_DEST_MISSING_ERROR	654	Cannot delete or modify the record because it does not exist.
k_SHIP_DEST_REF_CONT_TYP_ERROR	655	Referential Integrity error.
k_SHIP_DEST_REF_UNIT_PCK_ERROR	656	Referential Integrity error.
k_SHIP_DEST_REF_ST_RDM_ERROR	657	Referential Integrity error.
k_SHIP_DEST_REF_PRIM_KEY_ERROR	658	Primary Key Violation.
k_SHIP_DEST_REF_DEF_CSR_ERROR	659	Referential Integrity error.
k_SHIP_DEST_REF_EXP_CSR_ERROR	660	Referential Integrity error.
k_SHIP_DEST_REF_CUR_CODE_ERROR	661	Referential Integrity error.
k_SHIP_DEST_ROUTE_ERROR	662	Referential Integrity error.
k_SHIP_INVALID_DEF_CSR_ERROR	663	Default_Service_Code, Default_Carrier_Code and/or Default_Route values are NULL.
k_SHIP_INVALID_EXP_CSR_ERROR	664	Expedite_Service_Code, Expedite_Carrier_Code and/or Expedite_Route values are NULL.
k_SHIP_MLD_FK_ERROR	665	Referential Integrity error.
k_SHIP_DEST_SEQ_NBR_ERROR	668	Error validating sequence number.
k_ASN_PK_ERROR	700	Primary Key Violation.
k_ASN_ITEM_PK_ERROR	701	Primary Key Violation.
k_ASN_ITEM_ASN_FK_ERROR	702	Referential Integrity error.
k_ASN_ITEM_SD_FK_ERROR	703	Referential Integrity error.
k_ASN_ITEM_POD_FK_ERROR	704	Referential Integrity error.
k_ASN_MISSING_ERROR	705	Cannot delete or modify the record because it does not exist.
k_ASN_FOUND_ERROR	706	Cannot create record, record already exists.
k_ASN_HDR_MOD_OTHER_ERROR	707	Unanticipated error while checking ASN type.

**Table 6–1 Error Codes in Numerical Order**

<b>Error Message</b>	<b>Status Code</b>	<b>Description</b>
k_ASN_HDR_DEL_OTHER_ERROR	708	Unanticipated Error while checking appointment status for a delete.
k_ASN_ITEM_INVALID_QTY_ERROR	709	Change in unit quantity is less than zero.
k_ASN_ITEM_APPT_ERROR	710	Error, cannot deleted an already appointed ASN.
k_ASN_CNTR_MOD_OTHER_ERROR	711	Unanticipated error while attempting to modify the container.
k_ASN_CNTR_ITEM_CRE_OTH_ERROR	712	Unanticipated error while setting the distributed unit quantity.
k_ASN_CNTR_ITEM_MOD_OTH_ERROR	713	Unanticipated error while setting the distributed unit quantity.
k_ASN_MOD_WRONG_ASN_ERROR	714	Error, ASN type is incorrect.
k_ASN_DEL_NOT_ALLOWED_ERROR	715	Error, status is not received.
k_ASN_PO_DTL_COUNTRY_ERROR	716	Error, country not found in item supplier country.
k_ASN_APPOINT_OPEN_ERROR	717	Error, status in not received or null.
k_ASN_DATA_TRACKING_ERROR	718	Error occurred in ASN processing procedure.
k_ASN_NOZERO_APPT_ASNITM_ERROR	719	Error while deleting ASN item records.
k_VERIFY_ASN_PO_DATE_ERROR	720	Error, the deliver not after date is invalid.
k_VERIFY_ASN_PO_OTHER_ERROR	721	Error occurred verifying ASN Purchase Order.
k_VERIFY_ASN_ITEM_OTHER_ERROR	722	Unanticipated error occurred verifying ASN item record.
k_VERIFY_ASN_OTHER_ERROR	723	Unanticipated error occurred verifying the ASN record.
k_VERIFY_CONTAINER_OTHER_ERROR	724	Unanticipated error occurred verifying the container record.
k_VERIFY_CNTR_ITEM_OTHER_ERROR	725	Unanticipated error occurred verifying the container item record.
k_ASN_POST_ITEM_CRE_OTH_ERROR	726	Unanticipated error occurred in the post processing of ASN items.
k_ASN_POST_WIP_CODE_ERROR	727	Error occurred in the combine WIP codes procedure.
k_ASN_PO_INVALID_PO_ERROR	728	The PO is invalid for this ASN.
k_ASN_INVALID_STORE_DATE_ERROR	730	The In Store Date is invalid.
k_ASN_CONT_INVALID_ASN_ERROR	735	The ASN is incorrect for this container.
k_SA_IN_DISTRIBUTION_ERROR	829	Stock Allocation is in distribution.

**Table 6–1 Error Codes in Numerical Order**

<b>Error Message</b>	<b>Status Code</b>	<b>Description</b>
k_SO_IN_DISTRIBUTION_ERROR	830	Stock Order has an Allocation in distribution.
k_STOCK_REQUIRED_PO_ERROR	831	Missing PO number.
k_SA_NOT_FOUND_DELETE_ERROR	832	Cannot create the Stock Order Info Upload record, Stock Allocation record does not exist.
k_CONT_PK_ERROR	750	Primary Key Violation.
k_CONT_SD_FK_ERROR	751	Referential Integrity error.
k_CONT_LOC_FK1_ERROR	752	Referential Integrity error.
k_CONT_LOC_FK2_ERROR	753	Referential Integrity error.
k_CONT_CT_FK_ERROR	754	Referential Integrity error.
k_CONT_LOC_FK3_ERROR	755	Referential Integrity error.
k_CONT_ITEM_PK_ERROR	756	Primary Key Violation.
k_CONT_ITEM_CONT_FK_ERROR	757	Referential Integrity error.
k_CONT_ITEM_IM_FK_ERROR	758	Referential Integrity error.
k_CONT_MISSING_ERROR	759	Cannot delete or modify the record because it does not exist.
k_CONT_FOUND_ERROR	760	Cannot create record, record already exists.
k_CONT_ITEM_MISSING_ERROR	761	Cannot delete or modify the record because it does not exist.
k_CONT_ITEM_FOUND_ERROR	762	Cannot create record, record already exists.
k_STOCKO_PK_ERROR	800	Primary Key Violation.
k_STOCKO_STATE_FK1_ERROR	801	Referential Integrity error.
k_STOCKO_STATE_FK2_ERROR	802	Referential Integrity error.
k_STOCKO_PO_FK_ERROR	803	Referential Integrity error.
k_STOCK_NULL_SHIP_FIELD_ERROR	804	Error in ship field(s) when creating a stock order. One of the field(s) is null.
k_STOCK_PICK_DATE_ERROR	805	Error in the pick date when creating a stock order.
k_STOCK_MOD_CRE_OTHER_ERROR	806	Unanticipated error while modifying a stock order.
k_STOCK_ORDER_CRE_OTHER_ERROR	807	Unanticipated error while creating a stock order.
k_STOCKA_UP_REF1_ERROR	808	Referential Integrity error.
k_STOCKA_STOCKO_FK_ERROR	809	Referential Integrity error.
k_STOCKA_SHIPD_FK_ERROR	810	Referential Integrity error.
k_STOCK_INV_CARR_SERV_ERROR	811	Invalid carrier service when creating a stock order.
k_STOCK_INV_CARRIER_ERROR	812	Invalid carrier when creating a stock order.

**Table 6–1 Error Codes in Numerical Order**

<b>Error Message</b>	<b>Status Code</b>	<b>Description</b>
k_STOCK_INV_CSR_ERROR	813	Invalid carrier service route when creating a stock order.
k_STOCK_ORDER_MISSING_ERROR	814	Cannot delete or modify the record because it does not exist.
k_STOCK_ORDER_FOUND_ERROR	815	Cannot create record, record already exists.
k_STOCK_ALLOC_MISSING_ERROR	816	Cannot delete or modify the record because it does not exist.
k_STOCK_ALLOC_FOUND_ERROR	817	Cannot create record, record already exists.
k_STOCK_MODIFY_OTHER_ERROR	818	Unanticipated error while modifying a stock order.
k_STOCK_DISTRIBUTION_ERROR	819	Invalid stock distribution error while modifying a stock order.
k_STOCK_UNCARTONIZE_ERROR	820	Error during the uncartonize process when stock orders are modified. The error occurs during the call to the perform cartonization package.
k_STOCK_ALLOC_CRE_OTHER_ERROR	821	Unanticipated error in the standard UOM when creating a stock order.
k_ST_ALLOC_CRE_MOD_OTHER_ERROR	822	Unanticipated error while creating a stock order.
k_ST_ALLOC_INSTORE_DATE_ERROR	823	In store date error while creating a stock order.
k_ST_ALLOC_MODIFY_OTHER_ERROR	824	Unanticipated error while modifying a stock allocation.
k_STOCK_DELETE_OTHER_ERROR	825	Unanticipated error while generating a SD stock order info status message when a stock allocation is deleted.
k_STOCK_CARTONIZATION_ERROR	826	Error in cartonization during the call to perform cartonization when a stock order is created.
k_SA_NOT_FOUND_DELETE_ERROR	832	Cannot create record, record already exists.
k_BOM_PK_ERROR	850	Primary Key Violation.
k_BOM_IM_FK1_ERROR	851	Referential Integrity error.
k_BOM_IM_FK2_ERROR	852	Referential Integrity error.
k_INBOUND_WO_PK_ERROR	900	Primary Key Violation.
k_INBOUND_WO_PO_FK_ERROR	901	Referential Integrity error.
k_INBOUND_WO_SD_FK_ERROR	902	Referential Integrity error.
k_INBOUND_WO_WIP_FK_ERROR	903	Referential Integrity error.
k_INBOUND_WO_FOUND_ERROR	904	Cannot create record, record already exists.

**Table 6–1 Error Codes in Numerical Order**

<b>Error Message</b>	<b>Status Code</b>	<b>Description</b>
k_INBOUND_WO_MISSING_ERROR	905	Cannot delete or modify the record because it does not exist.
k_INBOUND_DEST_XML_OTHER_ERROR	906	Unanticipated
k_PENDING_RETURN_PK_ERROR	950	Primary Key Violation.
k_PENDING_RET_DET_PK_ERROR	952	Primary Key Violation.
k_PENDRET_DET_FK_PR_ERROR	953	Referential Integrity error.
k_PENDING_RETURN_FOUND_ERROR	954	Cannot create record, record already exists.
k_PENDING_RETURN_MISSING_ERROR	955	Cannot delete or modify the record because it does not exist.
k_PENDRET_DEST_XML_OTHER_ERROR	958	Unanticipated
k_PENDRET_ITEM_FK_ERROR	959	Referential Integrity error.
k_OUTBOUND_DEST_XML_OTH_ERROR	1001	Unanticipated
k_OBWO_STOCK_ALLOC_FK_ERROR	1002	Referential Integrity error.
k_OBWO_WIP_FK_ERROR	1003	Referential Integrity error.
k_OUTBOUND_WO_MISSING_ERROR	1004	Cannot delete or modify the record because it does not exist.
k_OUTBOUND_WO_FOUND_ERROR	1005	Cannot create record, record already exists.
k_SKU_ADD_OTHER_ERROR	1100	Unanticipated
k_SKU_MISSING_ERROR	1101	Cannot delete or modify the record because it does not exist.
k_SKU_FOUND_ERROR	1102	Task_Queue record already exists.
k_TASK_QUEUE_ACT_CODE_FK_ERROR	1103	Referential Integrity error.
k_TASK_QUEUE_WAVE_FK_ERROR	1104	Referential Integrity error.
k_TASK_QUEUE_ITEM_FK_ERROR	1105	Referential Integrity error.
k_STATE_NOT_FOUND_ERROR	10501	Cannot create record, record already exists.
k_COUNTRY_NOT_FOUND_ERROR	10502	Cannot create record, record already exists.
k_CURRENCY_NOT_FOUND_ERROR	10503	Cannot create record, record already exists.
k_CONTAINER_NOT_FOUND_ERROR	10504	Cannot create record, record already exists.
k_ITEM_UPDATE_COLUMNS_ERROR	10505	Cannot create record, record already exists.
k_PICK_DIR_SO_FK_ERROR	10506	Referential Integrity error.
k_COMP_TICK_STOCKO_ERROR	10507	Referential Integrity error.
k_KIT_BUILD_REF3_ERROR	10508	Referential Integrity error.
k_SORTED_ALLOC_REF1_ERROR	10510	Referential Integrity error.

**Table 6–1 Error Codes in Numerical Order**

<b>Error Message</b>	<b>Status Code</b>	<b>Description</b>
k_DISTRO_IS_REF1_ERROR	10511	Referential Integrity error.
k_STOCKA_CID_REF1	10512	Referential Integrity error.
k_SCHDULE_NBR_NULL	10515	Schedule Number is null.
k_PO_NULL_ERROR	10516	PO Number published by host system is null.
k_ITEM_NULL_ERROR	10517	Item ID published by host system is null.
k_PO_INVALID_ERROR	10518	PO does not exist in PO table.
k_ITEM_INVALID_ERROR	10519	Item does not exist in PO_Detail table.

## Error Codes in Alphabetical Order

The following table includes error codes in alphabetical order.

**Table 6–2 Error Codes in Alphabetical Order**

<b>Error Message</b>	<b>Status Code</b>	<b>Description</b>
k_APPT_DETAIL_POD_FK	404	Referential Integrity error.
k_ASN_APPOINT_OPEN_ERROR	717	Error, status in not received or null.
k_ASN_CNTR_ITEM_CRE_OTH_ERROR	712	Unanticipated error while setting the distributed unit quantity.
k_ASN_CNTR_ITEM_MOD_OTH_ERROR	713	Unanticipated error while setting the distributed unit quantity.
k_ASN_CNTR_MOD_OTHER_ERROR	711	Unanticipated error while attempting to modify the container.
k_ASN_CONT_INVALID_ASN_ERROR	735	The ASN is incorrect for this container.
k_ASN_DATA_TRACKING_ERROR	718	Error occurred in ASN processing procedure.
k_ASN_DEL_NOT_ALLOWED_ERROR	715	Error, status is not received.
k_ASN_FOUND_ERROR	706	Cannot create record, record already exists.
k_ASN_HDR_DEL_OTHER_ERROR	708	Unanticipated Error while checking appointment status for a delete.
k_ASN_HDR_MOD_OTHER_ERROR	707	Unanticipated error while checking ASN type.
k_ASN_INVALID_STORE_DATE_ERROR	730	The In Store Date is invalid.
k_ASN_ITEM_APPT_ERROR	710	Error, cannot deleted an already appointed ASN.
k_ASN_ITEM_ASN_FK_ERROR	702	Referential Integrity error.
k_ASN_ITEM_INVALID_QTY_ERROR	709	Change in unit quantity is less than zero.

**Table 6–2 Error Codes in Alphabetical Order**

<b>Error Message</b>	<b>Status Code</b>	<b>Description</b>
k_ASN_ITEM_PK_ERROR	701	Primary Key Violation.
k_ASN_ITEM_POD_FK_ERROR	704	Referential Integrity error.
k_ASN_ITEM_SD_FK_ERROR	703	Referential Integrity error.
k_ASN_MISSING_ERROR	705	Cannot delete or modify the record because it does not exist.
k_ASN_MOD_WRONG_ASN_ERROR	714	Error, ASN type is incorrect.
k_ASN_NOZERO_APPT_ASNITM_ERROR	719	Error while deleting ASN item records.
k_ASN_PK_ERROR	700	Primary Key Violation.
k_ASN_PO_DTL_COUNTRY_ERROR	716	Error, country not found in item supplier country.
k_ASN_PO_INVALID_PO_ERROR	728	The PO is invalid for this ASN.
k_ASN_POST_ITEM_CRE_OTH_ERROR	726	Unanticipated error occurred in the post processing of ASN items.
k_ASN_POST_WIP_CODE_ERROR	727	Error occurred in the combine WIP codes procedure.
k_ATTRIBUTE_DET_ITEM_FK_ERROR	604	Referential Integrity error.
k_ATTRIBUTE_DET_WIP_FK_ERROR	605	Referential Integrity error.
k_ATTRIBUTE_DETAIL_FOUND_ERROR	600	Attribute record already exists.
k_ATTRIBUTE_DETAIL_MISS_ERROR	601	Cannot delete or modify the record because it does not exist.
k_ATTRIBUTE_DETAIL_PK_ERROR	603	Primary Key Violation.
k_ATTRIBUTE_FOUND_ERROR	554	Cannot create record, record already exists.
k_ATTRIBUTE_MISSING_ERROR	555	Cannot delete or modify the record because it does not exist.
k_ATTRIBUTE_OTHER_ERROR	556	Unanticipated error occurred while validating the key.
k_ATTRIBUTE_TYPE_FK_ERROR	560	Referential Integrity error.
k_ATTRIBUTE_TYPE_PK_ERROR	559	Primary Key Violation.
k_BOM_IM_FK1_ERROR	851	Referential Integrity error.
k_BOM_IM_FK2_ERROR	852	Referential Integrity error.
k_BOM_PK_ERROR	850	Primary Key Violation.
k_COMP_TICK_STOCKO_ERROR	10507	Referential Integrity error.
k_CONT_CT_FK_ERROR	754	Referential Integrity error.
k_CONT_FOUND_ERROR	760	Cannot create record, record already exists.
k_CONT_ITEM_CONT_FK_ERROR	757	Referential Integrity error.
k_CONT_ITEM_FOUND_ERROR	762	Cannot create record, record already exists.
k_CONT_ITEM_IM_FK_ERROR	758	Referential Integrity error.

**Table 6–2 Error Codes in Alphabetical Order**

<b>Error Message</b>	<b>Status Code</b>	<b>Description</b>
k_CONT_ITEM_MISSING_ERROR	761	Cannot delete or modify the record because it does not exist.
k_CONT_ITEM_PK_ERROR	756	Primary Key Violation.
k_CONT_LOC_FK1_ERROR	752	Referential Integrity error.
k_CONT_LOC_FK2_ERROR	753	Referential Integrity error.
k_CONT_LOC_FK3_ERROR	755	Referential Integrity error.
k_CONT_MISSING_ERROR	759	Cannot delete or modify the record because it does not exist.
k_CONT_PK_ERROR	750	Primary Key Violation.
k_CONT_SD_FK_ERROR	751	Referential Integrity error.
k_CONTAINER_NOT_FOUND_ERROR	10504	Cannot create record, record already exists.
k_COUNTRY_NOT_FOUND_ERROR	10502	Cannot create record, record already exists.
k_CURRENCY_NOT_FOUND_ERROR	10503	Cannot create record, record already exists.
k_DIFF_DELETE_DIFF_GROUP_ERROR	304	An error occurred deleting from the Diff Group Detail table.
k_DIFF_GROUP_DET_DG_FK_ERROR	353	Referential Integrity error.
k_DIFF_GROUP_DET_DI_FK_ERROR	354	Referential Integrity error.
k_DIFF_GROUP_DET_PRI_KEY_ERROR	352	Primary Key Violation.
k_DIFF_GROUP_INSERT_ERROR	301	A Diff Group already exists.
k_DIFF_GROUP_OTHER_ERROR	303	An error occurred evaluating the Diff Group ID.
k_DIFF_GROUP_PRIMARY_KEY_ERROR	302	Primary Key Violation.
k_DIFF_GRP_DET_FOUND_ERROR	351	Cannot create record, record already exists.
k_DIFF_GRP_DET_MISSING_ERROR	350	Cannot delete or modify the record because it does not exist.
k_DIFF_GRP_ID_FOUND_ERROR	306	Cannot create record, record already exists.
k_DIFF_GRP_ID_MISSING_ERROR	300	Cannot delete or modify the record because it does not exist.
k_DIFF_ID_FOUND_ERROR	254	Cannot create record, record already exists.
k_DIFF_ID_MISSING_ERROR	250	Cannot delete or modify the record because it does not exist.
k_DIFF_INSERT_ERROR	251	Diff ID is already being used as a Diff Group ID.
k_DIFF_OTHER_ERROR	253	Unanticipated Differentiator error.
k_DIFF_PRIMARY_KEY_ERROR	252	Primary Key Violation.
k_DISTRO_IS_REF1_ERROR	10511	Referential Integrity error.

**Table 6–2 Error Codes in Alphabetical Order**

<b>Error Message</b>	<b>Status Code</b>	<b>Description</b>
k_GENERAL_API_FAILURE	E	A fatal error occurred in the procedure.
k_GENERAL_FACILITY_NOT_FOUND	105	Facility does not exist in the transshipment_setup table.
k_GENERAL_INVALID_FACILITY	102	Facility does not exist in the transshipment_setup table.
k_GENERAL_INVALID_ROUTING	103	An invalid destination was passed.
k_GENERAL_PRE_ADDL_PROCESSING	104	An error occurred in pre-additional processing.
k_GENERAL_SUCCESS	S	A message was consumed.
k_INBOUND_DEST_XML_OTHER_ERROR	906	Unanticipated
k_INBOUND_WO_FOUND_ERROR	904	Cannot create record, record already exists.
k_INBOUND_WO_MISSING_ERROR	905	Cannot delete or modify the record because it does not exist.
k_INBOUND_WO_PK_ERROR	900	Primary Key Violation.
k_INBOUND_WO_PO_FK_ERROR	901	Referential Integrity error.
k_INBOUND_WO_SD_FK_ERROR	902	Referential Integrity error.
k_INBOUND_WO_WIP_FK_ERROR	903	Referential Integrity error.
k_ISC_IS_FK_ERROR	420	Referential Integrity error.
k_ISC_PK_ERROR	419	Primary Key Violation.
k_ISCD_ISC_FK_ERROR	422	Referential Integrity error.
k_ISCD_PK_ERROR	421	Primary Key Violation.
k_ITEM_ATTR_DEFAULTS_ERROR	452	Error when creating item and processing the attributes.
k_ITEM_BOM_FOUND_ERROR	449	Cannot create record, record already exists.
k_ITEM_BOM_MISSING_ERROR	448	Cannot delete or modify the record because it does not exist.
k_ITEM_CLASS_ERROR	457	Error applying Item Download class.
k_ITEM_COUNTRY_IND_UPD_ERROR	402	Error updating item_supp_country primary country indicator.
k_ITEM_CREATE_OTHER_ERROR	432	Unanticipated error while creating an item.
k_ITEM_DIFF_FOUND_ERROR	451	Cannot create record, record already exists.
k_ITEM_DIFF_PK_ERROR	415	Primary Key Violation.
k_ITEM_FOUND_ERROR	437	Error when item is created. Item already exists.

**Table 6–2 Error Codes in Alphabetical Order**

<b>Error Message</b>	<b>Status Code</b>	<b>Description</b>
k_ITEM_INVALID_ERROR	10519	Item does not exist in PO_Detail table.
k_ITEM_MISSING_ERROR	436	Cannot delete or modify the record because it does not exist.
k_ITEM_MOD_MSG_OTHER_ERROR	435	Unanticipated error when modifying an item, item differentiator.
k_ITEM_NULL_ERROR	10517	Item ID published by host system is null.
k_ITEM_OVERWRITE_STATUS_ERROR	403	Error when checking if a column can be overwritten.
k_ITEM_SCD_OTHER_ERROR	431	Error while updating the dimensions of an item.
k_ITEM_SUPP_CTR_DIM_FND_ERROR	443	Cannot create record, record already exists.
k_ITEM_SUPP_CTR_DIM_MISS_ERROR	442	Cannot delete or modify the record because it does not exist.
k_ITEM_SUPP_CTR_FOUND_ERROR	441	Cannot create record, record already exists.
k_ITEM_SUPP_CTR_MISSING_ERROR	440	Cannot delete or modify the record because it does not exist.
k_ITEM_SUPP_IM_FK_ERROR	417	Referential Integrity error.
k_ITEM_SUPP_IND_UPDATE_ERROR	401	An error occurred updating the item_supplier or item_master tables.
k_ITEM_SUPP_ITEM_CRE_OTH_ERROR	434	Unanticipated error while modifying the item.
k_ITEM_SUPP_MOD_OTHER_ERROR	433	Unanticipated error while modifying an item.
k_ITEM_SUPP_PK_ERROR	416	Primary Key Violation.
k_ITEM_SUPP_VDR_FK_ERROR	418	Referential Integrity error.
k_ITEM_SUPPLIER_FOUND_ERROR	439	Cannot create record, record already exists.
k_ITEM_SUPPLIER_MISSING_ERROR	438	Cannot delete or modify the record because it does not exist.
k_ITEM_UDA_FOUND_ERROR	447	Cannot create record, record already exists.
k_ITEM_UDA_MISSING_ERROR	446	Cannot delete or modify the record because it does not exist.
k_ITEM_UPC_FOUND_ERROR	445	Cannot create record, record already exists.
k_ITEM_UPC_IND_UPDATE_ERROR	400	An error occurred in updating the primary UPC indicator in item_upc.
k_ITEM_UPC_MISSING_ERROR	444	Cannot delete or modify the record because it does not exist.

**Table 6–2 Error Codes in Alphabetical Order**

<b>Error Message</b>	<b>Status Code</b>	<b>Description</b>
k_ITEM_UPDATE_COLUMNS_ERROR	10505	Cannot create record, record already exists.
k_ITEM_VENDOR_REF_ERROR	405	Foreign key error for vendor when creating an item.
k_ITEM_ATTR_FK_ERROR	424	Referential Integrity error.
k_ITEM_IM_FK_ERROR	425	Referential Integrity error.
k_ITEM_PK_ERROR	423	Primary Key Violation.
k_ITEMBOM_CHECKING_ERROR	454	Error occurred checks to see if the MasterItemID is the same as the ComponentItemID.
k_ITEMBOM_COMP_MSTR_SAME_ERROR	453	MasterItemID is the same as the ComponentItemID.
k_ITEMCP_CURR_FK_ERROR	430	Referential Integrity error.
k_ITEMCP_IM_FK_ERROR	429	Referential Integrity error.
k_ITEMM_CT_FK_ERROR	409	Referential Integrity error.
k_ITEMM_PK_ERROR	406	Primary Key Violation.
k_ITEMM_UOM_FK_ERROR	407	Referential Integrity error.
k_ITEMM_UPS_FK_ERROR	410	Referential Integrity error.
k_ITEMM_VDR_FK_ERROR	408	Referential Integrity error.
k_ITEMM_WC_FK_ERROR	411	Referential Integrity error.
k_ITEMUPC_IM_FK_ERROR	413	Referential Integrity error.
k_ITEMUPC_PK_ERROR	412	Primary Key Violation.
k_ITEMUPC_UNIQUE_ERROR	414	Unique error on item_upc UPC number when modifying a record.
k_KIT_BUILD_REF3_ERROR	10508	Referential Integrity error.
k_OBWO_STOCK_ALLOC_FK_ERROR	1002	Referential Integrity error.
k_OBWO_WIP_FK_ERROR	1003	Referential Integrity error.
k_OUTBOUND_DEST_XML_OTH_ERROR	1001	Unanticipated
k_OUTBOUND_WO_FOUND_ERROR	1005	Cannot create record, record already exists.
k_OUTBOUND_WO_MISSING_ERROR	1004	Cannot delete or modify the record because it does not exist.
k_PENDING_RET_DET_PK_ERROR	952	Primary Key Violation.
k_PENDING_RETURN_FOUND_ERROR	954	Cannot create record, record already exists.
k_PENDING_RETURN_MISSING_ERROR	955	Cannot delete or modify the record because it does not exist.
k_PENDING_RETURN_PK_ERROR	950	Primary Key Violation.
k_PENDRET_DEST_XML_OTHER_ERROR	958	Unanticipated
k_PENDRET_DET_FK_PR_ERROR	953	Referential Integrity error.

**Table 6–2 Error Codes in Alphabetical Order**

<b>Error Message</b>	<b>Status Code</b>	<b>Description</b>
k_PENDRET_ITEM_FK_ERROR	959	Referential Integrity error.
k_PICK_DIR_SO_FK_ERROR	10506	Referential Integrity error.
k_PICKFROMLOC_ITEMM_FK_ERROR	426	Referential Integrity error.
k_PICKFROMLOC_LOC_FK_ERROR	427	Referential Integrity error.
k_PO_CNTRY_VENDOR_ITEM_ERROR	517	PO record exists, cannot delete Vendor.
k_PO_CRE_MOD_OTHER_ERROR	509	Unanticipated error while creating a PO.
k_PO_DELIVER_DATE_ERROR	516	Error on the deliver date while creating a PO.
k_PO_DETAIL_FOUND_ERROR	514	Cannot create record, record already exists.
k_PO_DETAIL_ITEM_ERROR	507	Error on the foreign key reference to item from PO details when creating a PO detail.
k_PO_DETAIL_MISSING_ERROR	515	Cannot delete or modify the record because it does not exist.
k_PO_DETAIL_PK_ERROR	505	Primary Key Violation.
k_PO_DETAIL_PO_ERROR	506	Error on the foreign key reference to PO from PO details when creating a PO detail.
k_PO_FOUND_ERROR	512	Cannot create record, record already exists.
k_PO_INVALID_ERROR	10518	PO does not exist in PO table.
k_PO_MISSING_ERROR	513	Cannot delete or modify the record because it does not exist.
k_PO_NULL_ERROR	10516	PO Number published by host system is null.
k_PO_OTHER_ERROR	521	Error validating PO detail required fields.
k_PO_PK_ERROR	504	Primary Key Violation.
k_PO_RECEIPT_FK_ERROR	508	Referential Integrity error.
k_PO_STATUS_CANNOT_CLOSE_ERROR	524	Error trying to Close a PO where an unreceived appointment exists.
k_PO_STATUS_CHECKING_ERROR	525	Error checking appointment information.
k_PO_VENDOR_REF_ERROR	503	Error on the vendor foreign key reference when creating a record.
k_SA_IN_DISTRIBUTION_ERROR	829	Stock Allocation is in distribution.
k_SA_NOT_FOUND_DELETE_ERROR	832	Cannot create the Stock Order Info Upload record, Stock Allocation record does not exist.
k_SA_NOT_FOUND_DELETE_ERROR	832	Cannot create record, record already exists.
k_SCHDULE_NBR_NULL	10515	Schedule Number is null.

**Table 6–2 Error Codes in Alphabetical Order**

<b>Error Message</b>	<b>Status Code</b>	<b>Description</b>
k_SHIP_DEST_FOUND_ERROR	653	Cannot create record, record already exists.
k_SHIP_DEST_MISSING_ERROR	654	Cannot delete or modify the record because it does not exist.
k_SHIP_DEST_REF_CONT_TYP_ERROR	655	Referential Integrity error.
k_SHIP_DEST_REF_CUR_CODE_ERROR	661	Referential Integrity error.
k_SHIP_DEST_REF_DEF_CSR_ERROR	659	Referential Integrity error.
k_SHIP_DEST_REF_EXP_CSR_ERROR	660	Referential Integrity error.
k_SHIP_DEST_REF_PRIM_KEY_ERROR	658	Primary Key Violation.
k_SHIP_DEST_REF_ST_RDM_ERROR	657	Referential Integrity error.
k_SHIP_DEST_REF_UNIT_PCK_ERROR	656	Referential Integrity error.
k_SHIP_DEST_ROUTE_ERROR	662	Referential Integrity error.
k_SHIP_DEST_SEQ_NBR_ERROR	668	Error validating sequence number.
k_SHIP_DEST_TYPE_NOT_VAL_ERROR	651	An error occurred checking the ship destination type.
k_SHIP_INVALID_DEF_CSR_ERROR	663	Default_Service_Code, Default_Carrier_Code and/or Default_Route values are NULL.
k_SHIP_INVALID_EXP_CSR_ERROR	664	Expedite_Service_Code, Expedite_Carrier_Code and/or Expedite_Route values are NULL.
k_SHIP_MLD_FK_ERROR	665	Referential Integrity error.
k_SHIP_OVERWRITE_STATUS_ERROR	650	Error retrieving ship destination overwrite status information.
k_SHIP_OWNING_DC_ERROR	652	Owning DC not found.
k_SKU_ADD_OTHER_ERROR	1100	Unanticipated
k_SKU_FOUND_ERROR	1102	Task_Queue record already exists.
k_SKU_MISSING_ERROR	1101	Cannot delete or modify the record because it does not exist.
k_SO_IN_DISTRIBUTION_ERROR	830	Stock Order has an Allocation in distribution.
k_SORTED_ALLOC_REF1_ERROR	10510	Referential Integrity error.
k_ST_ALLOC_CRE_MOD_OTHER_ERROR	822	Unanticipated error while creating a stock order.
k_ST_ALLOC_INSTORE_DATE_ERROR	823	In store date error while creating a stock order.
k_ST_ALLOC_MODIFY_OTHER_ERROR	824	Unanticipated error while modifying a stock allocation.
k_STATE_NOT_FOUND_ERROR	10501	Cannot create record, record already exists.
k_STOCK_ALLOC_CRE_OTHER_ERROR	821	Unanticipated error in the standard UOM when creating a stock order.

**Table 6–2 Error Codes in Alphabetical Order**

<b>Error Message</b>	<b>Status Code</b>	<b>Description</b>
k_STOCK_ALLOC_FOUND_ERROR	817	Cannot create record, record already exists.
k_STOCK_ALLOC_MISSING_ERROR	816	Cannot delete or modify the record because it does not exist.
k_STOCK_CARTONIZATION_ERROR	826	Error in cartonization during the call to perform cartonization when a stock order is created.
k_STOCK_DELETE_OTHER_ERROR	825	Unanticipated error while generating a SD stock order info status message when a stock allocation is deleted.
k_STOCK_DISTRIBUTION_ERROR	819	Invalid stock distribution error while modifying a stock order.
k_STOCK_INV_CARR_SERV_ERROR	811	Invalid carrier service when creating a stock order.
k_STOCK_INV_CARRIER_ERROR	812	Invalid carrier when creating a stock order.
k_STOCK_INV_CSR_ERROR	813	Invalid carrier service route when creating a stock order.
k_STOCK_MOD_CRE_OTHER_ERROR	806	Unanticipated error while modifying a stock order.
k_STOCK_MODIFY_OTHER_ERROR	818	Unanticipated error while modifying a stock order.
k_STOCK_NULL_SHIP_FIELD_ERROR	804	Error in ship field(s) when creating a stock order. One of the field(s) is null.
k_STOCK_ORDER_CRE_OTHER_ERROR	807	Unanticipated error while creating a stock order.
k_STOCK_ORDER_FOUND_ERROR	815	Cannot create record, record already exists.
k_STOCK_ORDER_MISSING_ERROR	814	Cannot delete or modify the record because it does not exist.
k_STOCK_PICK_DATE_ERROR	805	Error in the pick date when creating a stock order.
k_STOCK_REQUIRED_PO_ERROR	831	Missing PO number.
k_STOCK_UNCARTONIZE_ERROR	820	Error during the uncartonize process when stock orders are modified. The error occurs during the call to the perform cartonization package.
k_STOCKA_CID_REF1	10512	Referential Integrity error.
k_STOCKA_ITEMM_FK_ERROR	428	Referential Integrity error.
k_STOCKA_SHIPD_FK_ERROR	810	Referential Integrity error.
k_STOCKA_STOCKO_FK_ERROR	809	Referential Integrity error.
k_STOCKA_UP_REF1_ERROR	808	Referential Integrity error.
k_STOCKO_PK_ERROR	800	Primary Key Violation.

**Table 6–2 Error Codes in Alphabetical Order**

<b>Error Message</b>	<b>Status Code</b>	<b>Description</b>
k_STOCKO_PO_FK_ERROR	803	Referential Integrity error.
k_STOCKO_STATE_FK1_ERROR	801	Referential Integrity error.
k_STOCKO_STATE_FK2_ERROR	802	Referential Integrity error.
k_TASK_QUEUE_ACT_CODE_FK_ERROR	1103	Referential Integrity error.
k_TASK_QUEUE_ITEM_FK_ERROR	1105	Referential Integrity error.
k_TASK_QUEUE_WAVE_FK_ERROR	1104	Referential Integrity error.
k_VENDOR_ADDR_FOUND_ERROR	211	Cannot create record, record already exists.
k_VENDOR_ADDR_IND_UPDATE_ERROR	204	An error occurred updating the primary address indicator.
k_VENDOR_ADDR_MISSING_ERROR	210	Cannot delete or modify the record because it does not exist.
k_VENDOR_ADDR_PRIM_KEY_ERROR	206	Primary Key Violation.
k_VENDOR_ADDR_TYPE_UPD_ERROR	208	Unable to update the Vendor Address description.
k_VENDOR_DELETE_ERROR	200	Error while deleting a vendor.
k_VENDOR_FK_ERROR	207	Referential Integrity error.
k_VENDOR_FOUND_ERROR	203	Cannot create record, record already exists.
k_VENDOR_MISSING_ERROR	202	Cannot delete or modify the record because it does not exist.
k_VENDOR_OVERWRIT_STATUS_ERROR	201	Errors while retrieving overwrite status values.
k_VENDOR_PRIMARY_KEY_ERROR	205	Primary Key Violation.
k_VENDOR_STATE_FK_ERROR	209	Referential Integrity error.
k_VERIFY_ASN_ITEM_OTHER_ERROR	722	Unanticipated error occurred verifying ASN item record.
k_VERIFY_ASN_OTHER_ERROR	723	Unanticipated error occurred verifying the ASN record.
k_VERIFY_ASN_PO_DATE_ERROR	720	Error, the deliver not after date is invalid.
k_VERIFY_ASN_PO_OTHER_ERROR	721	Error occurred verifying ASN Purchase Order.
k_VERIFY_CNTR_ITEM_OTHER_ERROR	725	Unanticipated error occurred verifying the container item record.
k_VERIFY_CONTAINER_OTHER_ERROR	724	Unanticipated error occurred verifying the container record.

---

---

# Index

## B

---

batch, 4-1

## C

---

create logon id, 2-1  
  other users, 2-2  
  radio frequency, 2-3  
  rdmsr, 2-1  
  user accounts, 2-3  
  users in oracle, 2-3

## D

---

daemons, 2-5  
dba administration, 3-1  
  error details, 3-9  
  error log, 3-7  
  error records, 3-9  
  index, 3-5  
  locks, 3-2  
  rollback, 3-4  
  sequences, 3-6  
  table, 3-2

## F

---

formats, 5-1  
functions, 2-4  
  queues, 2-4

## J

---

jobs, 2-4

## L

---

light interface, 5-3  
  container, 5-9  
  destination, 5-4  
  distro item, 5-7  
  inventory, 5-6  
  item, 5-5  
  ship, 5-7  
  source, 5-8  
  transactions, 5-4

## M

---

manifest, 5-11  
  view, 5-12

## P

---

purging, 2-6

## R

---

rapistan, 5-13  
routing interface, 5-15  
  download, 5-16  
  packages, 5-15  
  upload, 5-16  
rwms, 1-1  
  features, 1-1  
  supported handhelds, 1-2

## S

---

sortation, 5-9  
  download, 5-10  
  upload, 5-10

## U

---

ups, 5-2  
  allocation, 5-2  
  carton, 5-2  
  upload, 5-2

