



# BEA WebLogic Adapter for SAP®

## Installation and Configuration Guide for WebLogic Integration 7.0

# Copyright

Copyright © 2003 BEA Systems, Inc. All Rights Reserved.

Copyright © 2003 iWay Software. All Rights Reserved.

## Restricted Rights Legend

This software and documentation is subject to and made available only pursuant to the terms of the BEA Systems License Agreement and may be used or copied only in accordance with the terms of that agreement. It is against the law to copy the software except as specifically allowed in the agreement. This document may not, in whole or in part, be copied photocopied, reproduced, translated, or reduced to any electronic medium or machine readable form without prior consent, in writing, from BEA Systems, Inc.

Use, duplication or disclosure by the U.S. Government is subject to restrictions set forth in the BEA Systems License Agreement and in subparagraph (c)(1) of the Commercial Computer Software-Restricted Rights Clause at FAR 52.227-19; subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.227-7013, subparagraph (d) of the Commercial Computer Software--Licensing clause at NASA FAR supplement 16-52.227-86; or their equivalent.

Information in this document is subject to change without notice and does not represent a commitment on the part of BEA Systems. THE SOFTWARE AND DOCUMENTATION ARE PROVIDED “AS IS” WITHOUT WARRANTY OF ANY KIND INCLUDING WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. FURTHER, BEA Systems DOES NOT WARRANT, GUARANTEE, OR MAKE ANY REPRESENTATIONS REGARDING THE USE, OR THE RESULTS OF THE USE, OF THE SOFTWARE OR WRITTEN MATERIAL IN TERMS OF CORRECTNESS, ACCURACY, RELIABILITY, OR OTHERWISE.

## Trademarks or Service Marks

BEA, Jolt, Tuxedo, and WebLogic are registered trademarks of BEA Systems, Inc. BEA Builder, BEA Campaign Manager for WebLogic, BEA eLink, BEA Manager, BEA WebLogic Commerce Server, BEA WebLogic Enterprise, BEA WebLogic Enterprise Platform, BEA WebLogic Express, BEA WebLogic Integration, BEA WebLogic Personalization Server, BEA WebLogic Platform, BEA WebLogic Portal, BEA WebLogic Server, BEA WebLogic Workshop and How Business Becomes E-Business are trademarks of BEA Systems, Inc.

All other trademarks are the property of their respective companies.

### BEA WebLogic Adapter for SAP Installation and Configuration Guide for WebLogic Integration 7.0

Part Number	Date	Release
N/A	MArch 2003	7.0 with Service Pack 2

---

# Table of Contents

## About This Document

Audience.....	v
Related Information.....	vi
Contact Us!.....	vi
Documentation Conventions .....	vii

## 1. Installing the Adapter for WebLogic Integration 7.0

Before Installing the Adapter .....	1-2
Before Using the Adapter with SAP .....	1-2
Understanding the Representation of Paths.....	1-3
Step 1. Obtaining the BEA WebLogic Adapter for SAP .....	1-5
Step 2. Configuring the Domain.....	1-5
Step 3. Adjusting the Classpath.....	1-6
Adjusting the Classpath for Windows.....	1-6
Adjusting the Classpath for UNIX .....	1-7
Step 4. Updating the BEA License.....	1-9
Step 5. Deploying the Adapter Using the WebLogic Server Console .....	1-10
Step 6. Creating or Updating the Adapter Group.....	1-15
Creating the Adapter Group .....	1-16
Adding the User Name to the Adapter Group.....	1-17
Next Steps.....	1-18



---

# About This Document

This document explains how to install the BEA WebLogic Adapter for SAP for WebLogic Integration 7.0. The BEA WebLogic Adapter for SAP is an application that is installed into the WebLogic Server J2EE application server infrastructure and WebLogic Integration. This adapter quickly and easily integrates your SAP IDocs, RFCs, and BAPIs with WebLogic Integration using Application Integration. Together, the adapter and WebLogic Integration provide all the functionality you need to integrate your mission critical SAP system with other enterprise applications.

This document is organized as follows:

- [Chapter 1, “Installing the Adapter for WebLogic Integration 7.0,”](#) describes how to install the BEA WebLogic Adapter for SAP.

## Audience

This document is written for system integrators who develop client interfaces between SAP and other applications. It describes how to install the BEA WebLogic Adapter for SAP in order to integrate SAP IDocs, RFCs, and BAPIs with WebLogic Integration. It is assumed that readers know Web technologies and have a general understanding of Microsoft Windows and UNIX systems as well as the WebLogic Integration and WebLogic Server infrastructure.

---

# Related Information

The following documents provide additional information for the associated software components:

- *BEA WebLogic Adapter for SAP User Guide*
- *BEA WebLogic Adapter for SAP Release Notes*
- *BEA Application Explorer Installation Guide*
- BEA WebLogic Platform installation and user documentation, which is available at the following URL:

<http://edocs.bea.com/platform/docs70/index.html>

# Contact Us!

Your feedback on the BEA WebLogic Adapter for SAP documentation is important to us. Send us e-mail at [docsupport@bea.com](mailto:docsupport@bea.com) if you have questions or comments. Your comments will be reviewed directly by the BEA professionals who create and update the BEA WebLogic Adapter for SAP documentation.

In your e-mail message, please indicate which version of the BEA WebLogic Adapter for SAP documentation you are using.

If you have any questions about this version of BEA WebLogic Adapter for SAP, or if you have problems installing and running the BEA WebLogic Adapter for SAP, contact BEA Customer Support through BEA WebSupport at [www.bea.com](http://www.bea.com). You can also contact Customer Support by using the contact information provided on the Customer Support Card that is included in the product package.

When contacting Customer Support, be prepared to provide the following information:

- Your name, e-mail address, phone number, and fax number
- Your company name and company address

- Your machine type and authorization codes
- The name and version of the product you are using
- A description of the problem and the content of pertinent error messages

# Documentation Conventions

The following documentation conventions are used throughout this document.

Convention	Item
<b>boldface text</b>	Indicates terms defined in the glossary.
Ctrl+Tab	Indicates that you must press two or more keys simultaneously.
<i>italics</i>	Indicates emphasis or book titles.
monospace text	Indicates code samples, commands and their options, data structures and their members, data types, directories, and file names and their extensions. Monospace text also indicates text that you must enter from the keyboard. <i>Examples:</i> <pre>#include &lt;iostream.h&gt; void main ( ) the pointer psz chmod u+w * \tux\data\ap .doc tux.doc BITMAP float</pre>
<b>monospace boldface text</b>	Identifies significant words in code. <i>Example:</i> <pre>void <b>commit</b> ( )</pre>
<i>monospace italic text</i>	Identifies variables in code. <i>Example:</i> <pre>String <i>expr</i></pre>

---

Convention	Item
UPPERCASE TEXT	Indicates device names, environment variables, and logical operators. <i>Examples:</i> LPT1 SIGNON OR
{ }	Indicates a set of choices in a syntax line. The braces themselves should never be typed.
[ ]	Indicates optional items in a syntax line. The brackets themselves should never be typed. <i>Example:</i> buildobjclient [-v] [-o name ] [-f file-list]... [-l file-list]...
	Separates mutually exclusive choices in a syntax line. The symbol itself should never be typed.
...	Indicates one of the following in a command line: <ul style="list-style-type: none"><li>■ That an argument can be repeated several times in a command line</li><li>■ That the statement omits additional optional arguments</li><li>■ That you can enter additional parameters, values, or other information</li></ul> The ellipsis itself should never be typed. <i>Example:</i> buildobjclient [-v] [-o name ] [-f file-list]... [-l file-list]...
.	Indicates the omission of items from a code example or from a syntax line. The vertical ellipsis itself should never be typed.



# 1 Installing the Adapter for WebLogic Integration 7.0

This section provides instructions for installing the BEA WebLogic Adapter for SAP with WebLogic Integration 7.0. It includes the following topics:

- [Before Installing the Adapter](#)
- [Understanding the Representation of Paths](#)
- [Step 1. Obtaining the BEA WebLogic Adapter for SAP](#)
- [Step 2. Configuring the Domain](#)
- [Step 3. Adjusting the Classpath](#)
- [Step 4. Updating the BEA License](#)
- [Step 5. Deploying the Adapter Using the WebLogic Server Console](#)
- [Step 6. Creating or Updating the Adapter Group](#)
- [Next Steps](#)

# Before Installing the Adapter

Before you install the BEA WebLogic Adapter for SAP, you must review the *BEA WebLogic Adapter for SAP Release Notes* to ensure that you have the required prerequisite software installed. The *BEA WebLogic Adapter for SAP Release Notes* is available at the following URL:

`http://edocs.bea.com/wlapters/doc70/index.html`

In order to interact with SAP, you must gather the following SAP-specific connection information and ensure that it is available during the BEA WebLogic Adapter for SAP installation and configuration process:

- SAP Application Server Host Name/Address
- SAP System Number
- SAP Client
- SAP User ID
- SAP Password
- SAP Language

## Before Using the Adapter with SAP

Before installing the BEA WebLogic Adapter for SAP, you must first download and install the SAP Java Connector on the target platform. Download the SAP Java Connector from the following URL:

`http://service.sap.com/connectors`

**Note:** A valid SAP Service ID is required. For more information, contact your SAP BASIS administrator.

To download and install the SAP Java Connector:

1. After downloading the SAP Java Connector, use WinZip or jar to extract the files to a directory or your choice (for example, `d:\sap_rfc` on Windows or `/sap_rfc` on a UNIX system).
  2. It is essential that the files be placed in the proper locations:
    - On a Windows system, the `sapjco.jar` file unloads the `sapjcorfc.dll` from the directory in which it is invoked. This file must remain in the same directory as the `sapjco.jar` file. Place the other library file, `librfc32.dll`, in the Windows `\system32` directory; for example, `c:\winnt\system32`.
    - On UNIX systems, you must keep the library files, `librfccm` and `libsapjcorfc`, in the same directory with the `sapjco.jar` file.
- Note:** The file extensions for these files vary depending on the UNIX platform; for example, on Solaris, the file names are `libsapjcorfc.so` and `librfccm.so`.

# Understanding the Representation of Paths

Because the location of files in the WebLogic Integration environment depends on options selected during installation and configuration, the conventions that follow are used throughout to represent paths.

- *BEA\_HOME* represents the BEA Home directory specified for your WebLogic installation.

For example, if you install the product in the default location on a Windows system, *BEA\_HOME* represents `c:\bea`.

- *WLI\_HOME* represents the root of your WebLogic Integration installation.

For example:

- If you install WebLogic Integration 7.0 in the default location on a Windows system, *WLI\_HOME* represents `c:\bea\weblogic700\integration`.

# 1 Installing the Adapter for WebLogic Integration 7.0

---

- *domain* is used to indicate the name of a domain.
- In WebLogic Integration 7.0, a new tool, the Configuration Wizard, is used to create custom user domains. When you use the Configuration Wizard to set up the domain configuration stored on the administration server, you are prompted to assign a domain name, *domain*, and to specify the location to which the *domain* directory will be installed. The files required by the administration server are installed in the *domain* directory under the specified location.

For additional information, see *Using the Configuration Wizard* which is available at the following URL:

<http://edocs.bea.com/platform/docs70/configwiz/index.html>

For example, if you accept the Configuration Wizard default location, *BEA\_HOME*\user\_projects, the files required by the administration server are installed in the following directory:

*BEA\_HOME*\user\_projects\domain

- *DOMAIN\_HOME* represents the complete path to the root of a domain.

For example:

- If you use the WebLogic Integration 7.0 Configuration Wizard to create a domain in the default location on a Windows system, *DOMAIN\_HOME* represents c:\bea\weblogic700\user\_projects\domain.

**Note:** *WLI\_HOME* and *BEA\_HOME* (italicized) also represent the corresponding Windows and UNIX environment variables. For example, the literal interpretation of *WLI\_HOME* is %WLI\_HOME% for Windows and \$WLI\_HOME for UNIX.

Unlike *WLI\_HOME* and *BEA\_HOME*, *DOMAIN\_HOME* is not an environment variable that is set by default in the WebLogic Integration environment.

# Step 1. Obtaining the BEA WebLogic Adapter for SAP

The BEA WebLogic Adapter for SAP software is packaged as an EAR file (BEA\_SAP\_1\_0\_70.ear). You can obtain the software on CD or download it from [www.bea.com](http://www.bea.com).

**Note:** Check the release notes to determine if there are required patches for WebLogic Platform that are specific to your configuration. Contact BEA Customer Support to obtain patches. Information on contacting customer support is in the release notes.

# Step 2. Configuring the Domain

The adapter can only be deployed in a domain that includes support for application integration functionality. If you have not already done so, use the Configuration Wizard to create the domain and select one of the following domain templates:

- Enterprise application integration (EAI) domain template
- WebLogic Integration (WLI) domain template
- Platform domain template

For the information you need to configure a fully functional domain based on the template, see the appropriate section of the *Configuration Wizard Template Reference*:

- For the EAI domain template, see the following URL:  
<http://edocs.bea.com/platform/docs70/template/eaidomain.html>
- For the WLI domain template, see the following URL:  
<http://edocs.bea.com/platform/docs70/template/wlidomain.html>
- For the platform domain template, see the following URL:  
<http://edocs.bea.com/platform/docs70/template/platjar.html>

For general information about using the Configuration Wizard, see *Using the Configuration Wizard* at the following URL:

<http://edocs.bea.com/platform/docs70/configwiz/index.html>

When you use the Configuration Wizard to create a domain that includes support for application integration, a domain-specific version of the Database Wizard is installed in the `DOMAIN_HOME` directory. You must run the Database Wizard for the domain to initialize the database repository with the required tables and system data. For additional information, see “Configuring the Database for a Domain” in *Starting, Stopping and Customizing BEA WebLogic Integration*, at the following URL:

<http://edocs.bea.com/wli/docs70/config/index.htm>

## Step 3. Adjusting the Classpath

Set the classpath using the procedure appropriate for your system:

- [Adjusting the Classpath for Windows](#)
- [Adjusting the Classpath for UNIX](#)

**Note:** The following procedures reference the SAP Java Connector, which must be obtained from SAP and installed before installing the BEA WebLogic Adapter for SAP. For additional information, see “[Before Using the Adapter with SAP](#)” on page 1-2.

### Adjusting the Classpath for Windows

To adjust the classpath on Windows, complete the following steps:

1. Go to the root directory for your domain:

```
cd DOMAIN_HOME
```

**Note:** You must choose a domain that supports application integration functionality.

2. Find the `SetDomainTypeData.cmd` file.

Here, *DomainType* is the type of the domain. For example, if your domain is configured to support the development of solutions that employ the full range of WebLogic Integration functionality, it contains the `SetwliDomainData.cmd` file.

3. Update the SVRCP environment variable settings in the `SetDomainTypeData.cmd` file.

**Note:** The SVRCP environment variable is used in the `SetDomainTypeData` script to set the classpath for the java executable.

After the following line:

```
set SVRCP=%SVRCP%;%WLI_DOMAIN_HOME%\applications\DefaultWebApp_
myserver\WEB-INF\classes
```

add the following lines:

```
rem ===== SAP Java Libraries and DLLs (for JNI calls) =====
set SVRCP=%SVRCP%;c:\Ear\SAP\win32\sapjco.jar

set SVRCP=C:\temp\CR95687\CR095687.jar;%SVRCP%
```

```
rem ==== Adding SAP win32 directory to PATH ====
set PATH=%PATH%;c:\Ear\SAP\win32
```

**Caution:** This directory must also contain the `sapjcorfc.dll` file. In addition, you must ensure that the `librfc32.dll` file is installed in your Windows `\system32` directory. For more information on these files, see [“Before Using the Adapter with SAP” on page 1-2](#).

## Adjusting the Classpath for UNIX

To adjust the classpath on UNIX, complete the following steps:

1. Go to the root directory for your domain:

```
cd DOMAIN_HOME
```

**Note:** You must choose a WebLogic Integration domain that supports application integration functionality.

# 1 Installing the Adapter for WebLogic Integration 7.0

---

2. Find the *SetDomainTypeData* file.

Here, *DomainType* is the type of the domain. For example, if your domain is configured to support the development of solutions that employ the full range of WebLogic Integration functionality, it contains the *SetwliDomainData* file.

3. Update the SVRCP environment variable settings in the *SetDomainTypeData* file.

**Note:** The SVRCP environment variable is used in the *SetDomainTypeData* script to set the classpath for the java executable.

After the following line:

```
SVRCP=$SVRCP:$WLI_DOMAIN_HOME/applications/DefaultWebApp_myserver/  
WEB-INF/classes
```

add the following JAR file:

```
rem ===== SAP Java Libraries and DLL's (for JNI calls) =====  
SVRCP=$SVRCP:/sap_rfc/Ear/SAP/solaris/sapjco.jar  
  
SVRCP=sap_patch/temp/CR95687/CR095687.jar:$SVRCP
```

Here, */sap\_rfc* is the directory in which you downloaded and unpacked the *sapjco.jar* file. Here, */sap\_patch* is the directory in which you downloaded and unpacked the patch file. For more information, see [“Before Using the Adapter with SAP” on page 1-2](#).

4. Update the *SetDomainTypeData* file to add the location of the files to the appropriate environment variable.

- For example, on Solaris, add the following to the *SetDomainTypeData* file to add the directory to the LD\_LIBRARY\_PATH:

```
LD_LIBRARY_PATH=$LD_LIBRARY_PATH:/sap_rfc/SAP/solaris
```

- For example, on Linux, add the following to the *SetDomainTypeData* file to add the directory to the LD\_LIBRARY\_PATH:

```
LD_LIBRARY_PATH=$LD_LIBRARY_PATH:/sap_rfc/SAP/linux
```

Here, */sap\_rfc* is the directory in which you downloaded and unzipped the *sapjco.jar* file.

**Caution:** This directory must also contain the library files, *librfccm* and *libsapjcorfc*. For more information, see [“Before Using the Adapter with SAP” on page 1-2](#).



## Step 4. Updating the BEA License

The BEA WebLogic Adapter for SAP cannot be used without a valid software license. If you have downloaded the adapter for evaluation, you must obtain an evaluation license as described on the adapter download page. If you have purchased a license for the adapter, the license file is typically sent to you as an e-mail attachment.

When you have obtained a valid license for the adapter, update your `license.bea` file by completing the following steps:

1. Save the license file that you obtained with a name other than `license.bea`, in the `BEA_HOME` directory. For example, save the file as `sap_adapter_license.bea`. Use this file as the *license\_update\_file* in step 4 of this procedure.

**Warning:** Do not overwrite or change the name of the existing `license.bea` file.

2. Perform the step appropriate for your platform:
  - On a Windows system, open an MS-DOS session and go to the `BEA_HOME` directory.
  - On a UNIX system, go to the `BEA_HOME` directory.
3. If it is not already included, add the JDK to your `PATH` variable by executing the command appropriate to your system:
  - On a Windows system:

```
set PATH=BEA_HOME\jdk131_03\bin;%PATH%
```
  - On a UNIX system:

```
PATH=BEA_HOME/jdk131_03/bin:$PATH
export PATH
```
4. Merge the license update file into your existing license by executing the command appropriate to your system:
  - On a Windows system:

```
UpdateLicense license_update_file
```
  - On a UNIX system:

```
sh UpdateLicense.sh license_update_file
```

Here, *license\_update\_file* is the name to which you saved the license update file in step 1.

5. Save a copy of your updated `license.bea` file in a safe place outside the WebLogic Integration and application installation directories.

# Step 5. Deploying the Adapter Using the WebLogic Server Console

After the BEA WebLogic Adapter for SAP is installed, it must be deployed to your domain. To configure and deploy an adapter using the WebLogic Server Administration Console, complete the following steps:

1. Start WebLogic Server.
2. Start the WebLogic Server Administration Console in a browser using the following URL:

`http://host:port/console/`


Here, *host* represents the machine on which WebLogic Server is running and *port* represents the listening port.

For example, `http://localhost:7001/console/`

3. When prompted, enter the user name and password for the server.

The WebLogic Server Administration Console opens.


Figure 1-1 WebLogic Server Console

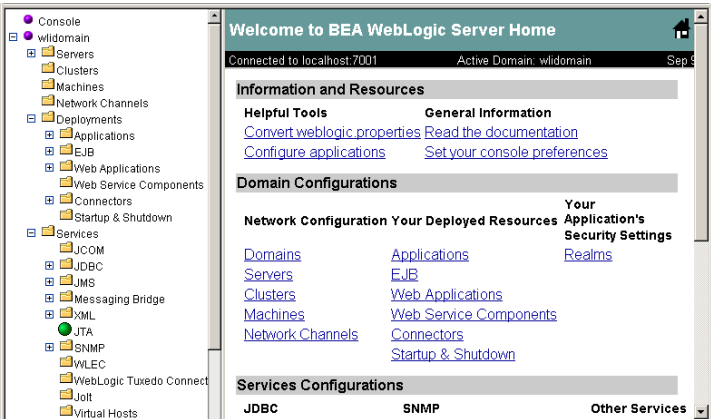

4. In the left pane, choose Deployments and then Applications from the navigation tree.

The console displays the Applications window.


Figure 1-2 Applications Window

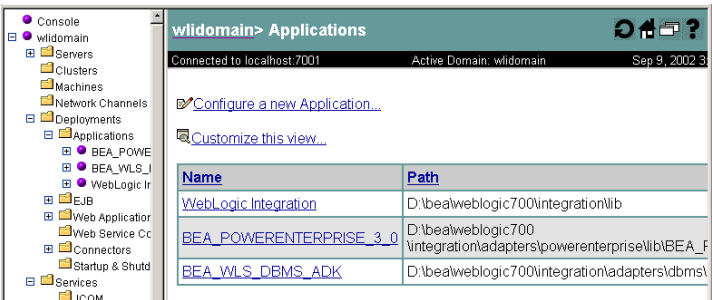

5. Click the Configure a new Application link.

The console displays the Locate Application or Component to configure window.

**Figure 1-3 Locate Application or Component to Configure Window**

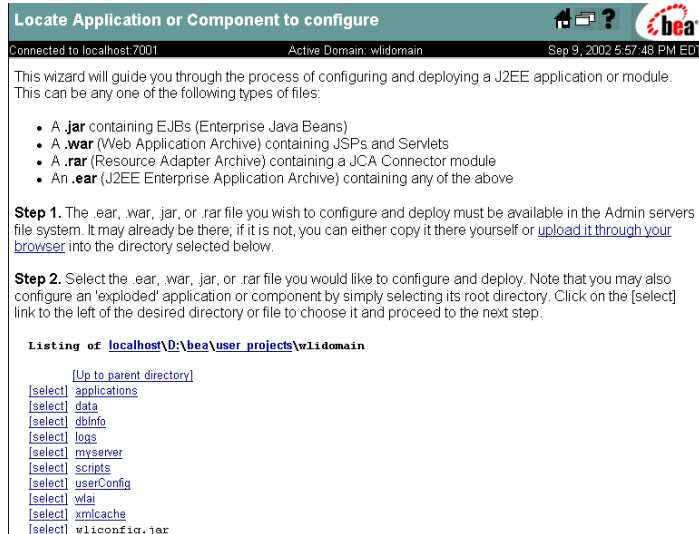

6. Do one of the following:

If you copied the `BEA_SAP_1_0_70.ear` file to a directory on the administrative server, navigate to that directory. For example, if you copied the file to the `D:\bea\AdapterEars` directory, select the directory as shown in the following figure.

**Figure 1-4 Locating the Adapter EAR File**

**Listing of [localhost\\D:\\bea\\AdapterEars](#)**

[\[Up to parent directory\]](#)

[\[select\]](#) BEA\_SAP\_1\_0\_70.ear

If you have not copied the `BEA_SAP_1_0_70.ear` file to a directory on the administrative server, do the following:

a. Navigate to the directory to which the file will be uploaded.

For example, to upload the adapter from your local machine to the `D:\bea\AdapterEars` directory on the administrative server, select the directory as shown in the following figure.

### Figure 1-5 Selecting the Target Directory


Listing of [localhost\D:\bea\AdapterEars](#)

[\[Up to parent directory\]](#)

- b. Click the upload it through your browser link to display the Install or Update an Application window.
- c. Click Browse to display the Choose File dialog box.
- d. In the Choose File dialog box, locate the file, and then click Open.

The console displays the selected location.

### Figure 1-6 Install or Update an Application Window

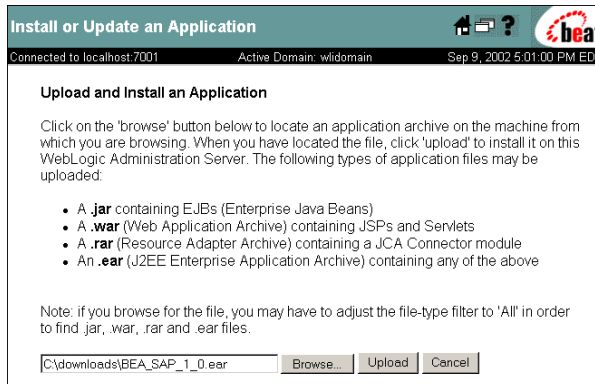

- e. Click Upload.

The browser status bar indicates upload progress. When the upload is complete, you are returned to the Locate Application or Component to configure window. The uploaded file now resides in the directory selected in step a.

### Figure 1-7 Adapter EAR File Uploaded to Administrative Server

Listing of [localhost\D:\bea\AdapterEars](#)


[\[Up to parent directory\]](#)

[\[select\]](#) BEA\_SAP\_1\_0\_70.ear

7. Click the [select] link to the left of the adapter EAR file.

The console displays the Configure Application or Component window.

**Figure 1-8 Configure Application or Component Window**

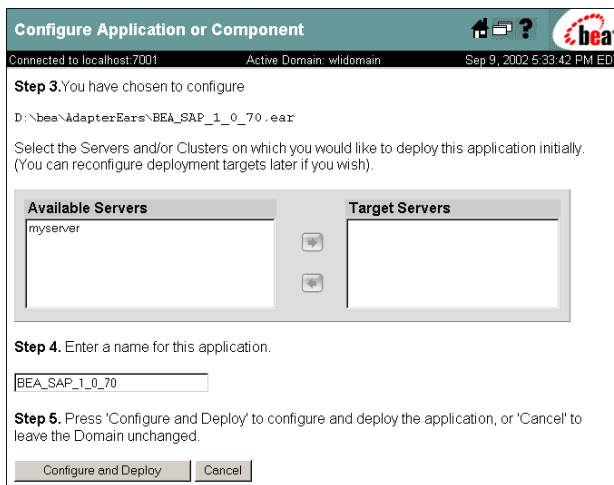


8. Select the servers or clusters on which to deploy the adapter by using the arrow buttons to move entries from the available list to the target list.
9. You must change the application name from BEA\_SAP\_1\_0\_70 to BEA\_SAP\_1\_0.

**Note:** If you do not change the application name, the adapter will not be available to application views.

The following figure shows a configured application.

**Figure 1-9 Configured Application**

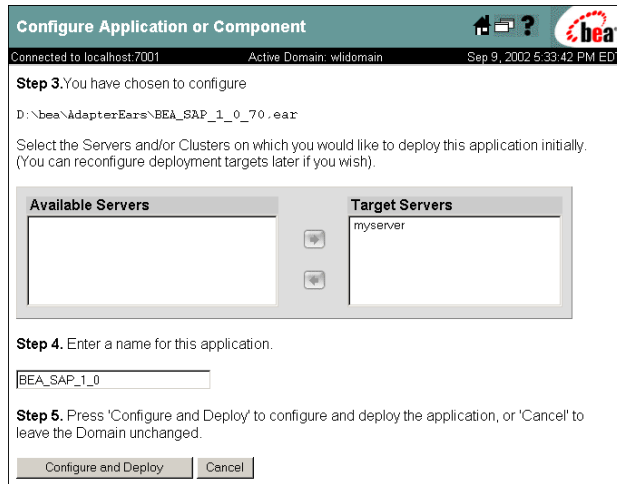

10. Click **Configure and Deploy**.

The console displays the deployment status, which includes a description, status, begin time, and end time for the deployed adapter.

## Step 6. Creating or Updating the Adapter Group

Before you create an application view that uses the events or services supported by an adapter, the following requirements must be met:

- The user group, `adapter`, must be defined.
- The administrative server user name must be a member of the `adapter` group.

The action required to complete the configuration depends on which domain template you selected when you created the domain. See the following table for guidelines.

**Table 1-1 Configuration Requirements**

<b>If you created a domain based on the . . .</b>	<b>And the administrative server user name is . . .</b>	<b>Then . . .</b>
Platform domain template	Any value	Create the adapter group and add the administrative user name to it as described in <a href="#">“Creating the Adapter Group” on page 1-16.</a>
WLI or EAI domain template	system	The adapter group is already defined. This group includes the system user name by default. No further configuration is required.
WLI or EAI domain template	A value other than system	The adapter group is already defined. Add the user name to the group as described in <a href="#">“Adding the User Name to the Adapter Group” on page 1-17.</a>

## Creating the Adapter Group

To create the adapter group and add the administrative server user name to it, complete the following steps:

1. In the left pane of the WebLogic Server Administration Console, choose Compatibility Security and then Groups from the navigation tree.
2. Click the Create a New Group link to display the Group window.

**Figure 1-10 Group Window**


The screenshot shows a web-based form titled "Group". It contains three input fields: "Name:" with the text "MyGroup" entered, "Add Users:", and "Add Groups:". An "Apply" button is located at the bottom right of the form.



3. Enter `adapter` in the Name field.
4. Enter the administrative server user name in the Add Users field.
5. Click Apply.

The Group window is updated as shown in the following figure.

**Figure 1-11 Group Window**

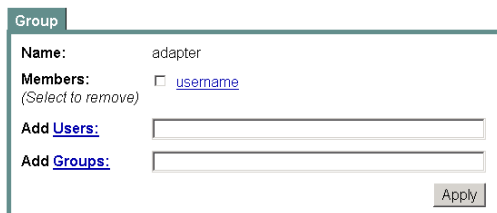


## Adding the User Name to the Adapter Group

To add the administrative server user name to the `adapter` group, complete the following steps:

1. In the left pane of the WebLogic Server Administration Console, choose Compatibility Security and then Groups from the navigation tree.  
The console displays the groups currently defined for the domain.
2. Locate and click the link for the `adapter` group to display the group definition.

**Figure 1-12 Group Definition**

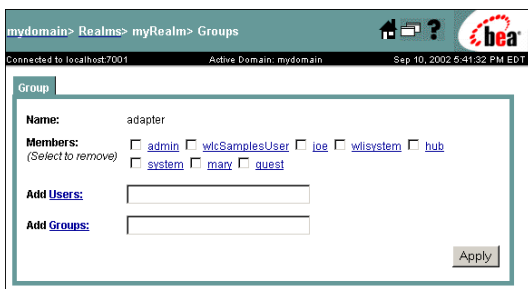

3. If the administrative server user name is not included in the Members list, enter the user name in the Add Users field.
4. Click Apply to add the user name to the group.  
The name is added to the Members list.

## Next Steps

If you have not already installed the BEA Application Explorer, install it now. See the *BEA Application Explorer Installation and Configuration Guide*.

When you have successfully installed and deployed the adapter and the BEA Application Explorer, you can log on to the WebLogic Integration Application View Console to create application views that employ events and services supported by the BEA WebLogic Adapter for SAP. For more information, see the *BEA WebLogic Adapter for SAP User Guide*.