
PeopleSoft Enterprise Supply Chain Management Integration 9.1 PeopleBook

November 2009

Copyright © 1992, 2009, Oracle and/or its affiliates. All rights reserved.

Trademark Notice

Oracle is a registered trademark of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

License Restrictions Warranty/Consequential Damages Disclaimer

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

Warranty Disclaimer

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

Restricted Rights Notice

If this software or related documentation is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT RIGHTS

Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation shall be subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License (December 2007). Oracle USA, Inc., 500 Oracle Parkway, Redwood City, CA 94065.

Hazardous Applications Notice

This software is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications which may create a risk of personal injury. If you use this software in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy and other measures to ensure the safe use of this software. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software in dangerous applications.

Third Party Content, Products, and Services Disclaimer

This software and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third party content, products and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third party content, products or services.

Contents

Preface

PeopleSoft Supply Chain Management Integration Preface	xv
PeopleSoft Application Fundamentals	xv
PeopleBooks and the Online PeopleSoft Library	xv
Common Elements Used in This PeopleBook	xvi

Part 1

Understanding SCM Integration

Chapter 1

Getting Started with Supply Chain Management Integration	3
Navigating PeopleSoft SCM Integration Documentation	3
Integration Implementation	5

Chapter 2

Understanding PeopleSoft Supply Chain Management Enterprise Integration Points	7
PeopleSoft SCM Inbound EIPs	7
Understanding the Inbound EIP Architecture	7
PeopleSoft SCM Outbound EIPs	10
Understanding the Outbound Transaction Architecture	10
Comprehensive List of SCM EIPs	12

Chapter 3

Implementing Integrations	69
Setting Up Service Operations	69
Pages Used to Set Up Service Operations	74
Setting Up Chunking	75
Pages Used to Set Up Chunking	76

Setting Up Electronic Data Collections	78
Page Used to Set Up Electronic Data Collections	78
Setting Up Electronic Data Collections Defaults	78
Setting Up BackBone InterlinX	79
Understanding BackBone InterlinX	79
Prerequisites	80
Pages Used to Set Up Backbone InterlinX	80
Setting Up Target Sets	81
Defining Integrations	81
Implementing XML Mapper	84
Understanding XML Mapper	84
Prerequisites to Using XML Mapper	85
Pages Used to Set Up XML Mapper	85
Defining Maps	85
Defining Map Set Detail	88
Defining Map Sets	89
Defining Node Associations	90

Chapter 4

Processing Enterprise Integration Points (EIPs)	91
Processing Inbound EIPs	91
Pages Used to Process Inbound EIPs	91
Using Transaction Maintenance	92
Using Data Definition Maintenance	93
Purging Transactions	96
Processing Outbound EIPs	97
Page Used to Process Outbound EIPs	97
Processing Outbound EIPs	97
Processing Backbone Interlinks	98
Page Used to Process Backbone Interlinks	98
Running the Backbone Interlink Process	99

Part 2

Integrating to Warehouse Management Systems

Chapter 5

Understanding Warehouse Management Systems	103
---	------------

General WMS Integration Issues	103
System-Wide Assumptions About WMS Integration	104
WMS EIPs	105
The Order-to-Cash Business Process in a WMS Integration	109
Order Entry	110
Reservation Processing	111
Order Release Processing	112
Order Changes	113
Shipping Processing	114
The Procure-to-Pay Business Process in a WMS Integration	115
Requisitions	116
Purchase Orders	117
Purchase Order Expected Receipts Processing	117
Receiving	119
Four-Wall Warehousing Functions in a WMS Integration	120
Inventory Adjustments	121
Storage Location Transfers (Inventory Status Updates)	121
Physical Inventory (Stock Quantity Snapshots)	122
Static Information Updates in a WMS Integration	123
Customer Data	124
Vendor Data	124
Item Data	124
Carrier and Shipping Method Data	124
Location Data	125

Part 3

Integrating to Healthcare Applications

Chapter 6

Integrating With a Third-Party Point-of-Use Supplier System	129
Understanding POU Supplier Systems	129
Assumptions About POU Supplier System Integration	130
Definition of Items and Par Locations for a POU Supplier Integration	130
Chunking Rules for Streamlining POU Supplier Integration Processes	131
POU Suppliers as Par Locations in PeopleSoft Inventory	131
RTVs for POU Supplier Items	132
Defining Par Location Data for the POU Supplier and the PeopleSoft System	132
Managing Item Replenishment Data in the POU Supplier and the PeopleSoft System	133
Restocking a POU Supplier	134
Using POU Supplier EIPs	135

Following the Data Flow Between the PeopleSoft System and the POU Supplier System	135
Managing Subscription Errors for POU EIPs	136

Chapter 7

Integrating With a Third-Party Surgical Resource Software Application	139
Understanding SRS Applications	139
Defining Assumptions of an SRS Application Integration	139
Defining Items and Par Locations for an SRS Application Integration	140
Using Chunking to Streamline SRS Application Integration Processes	140
Creating RTVs for Surgical Resource Par Location Items	141
Implementing an SRS Application Integration	141
Defining Par Location Data for the SRS Application and the PeopleSoft System	141
Stocking Case Carts From a Surgical Resource Par Location	142
Maintaining Item Replenishment Data in the SRS Application and the PeopleSoft System	144
Restocking a Surgical Resource Par Location	145
Using SRS Application EIPs	146
Managing Errors for SRS EIPs	148

Part 4

Integrating to Electronic Data Collection Systems

Chapter 8

Designing an Electronic Data Collection System	153
Understanding Electronic Data Collection	153
Setting Up Electronic Data Collection Defaults	154
Setting Up Labels	154
Page Used to Set Up Labels	154
Setting Up Data Collection Labels	154
Setting Up the UCC/EAN Manufacturer ID	155
Pages Used to Set Up the UCC/EAN Manufacturer ID	155
Specifying the Manufacturer ID	156
Setting Up the Wedge Command Code	156
Setting Up Unit of Measure	156
Setting Up Picking	156
Setting Up Putaway	156

Chapter 9

Using an Electronic Data Collection System	157
Understanding Electronic Data Collection	157
Device Selection	158
Using Electronic Data Collection Transactions	159
Using Background Transaction Processes	161
Purging Transactions	163
Generating Labels	163
Managing Files	164
Common Elements Used in This Section	166
Pages Used to Print Labels	167
Printing Purchasing Receipt Labels	169
Printing Completion Labels	170
Printing Pull Ticket Labels	170
Printing Kanban Card Labels	173
Selecting the Kanban Card Label Range	175
Printing Storage Location Labels	175
Printing Item Storage Labels	175
Printing Storage Container Labels	176
Printing Shipping Carton Labels	177
Printing Shipping Serial Labels	179
Printing Shipping Container Label	180

Chapter 10

Understanding Record Layouts for the Electronic Data Collection System	183
Par Location Count and Physical Accounting File Formats	183
Par Location Count	184
Physical Accounting	188
Label Extract File Record Definitions	189
Item Usage Label	190
Item Storage Label	191
Storage Container Label	192
Storage Location Label	192
Shipping Carton Label	193
Shipping Container Label	197
Shipping Serial Number Label	199
Production Completion Label	200
Purchasing Receipt Label	201
Kanban Card and Pull Ticket Label	202

Picking Plan Extract File Record Definitions	205
Inventory Picking Extract File Format	205
Manufacturing Picking Extract File Format	210

Part 5

Integrating with Transportation Management Systems

Chapter 11

Integrating with Transportation Management Systems	219
Understanding the Transportation Management System Integration with PeopleSoft Inventory	219
Setting Up PeopleSoft for TMS Integration	222
Pages Used to Set Up PeopleSoft for TMS Integration	222
Setting up the TMS Integration	222
Publishing the TMS Order Release EIP	223
Understanding the TMS Order Release Process	223
Pages Used to Publish the TMS Order Release EIP	225
Sending TMS Data from PeopleSoft Inventory to the TMS	225
Communicating Order Changes to the TMS	227
Understanding TMS Processing	228
Receiving the Load Notification EIP	229
Understanding the Load Notification EIP Process	229
Pages Used to Subscribe to the Load Notification EIP	230
Uploading TMS Data from the TMS to PeopleSoft Inventory	230
Viewing and Correcting Errors	231

Part 6

Integrating with PeopleSoft CRM

Chapter 12

Integrating with PeopleSoft CRM	235
Understanding PeopleSoft SCM Integration with PeopleSoft CRM	235
Common Object Integrations	235
PeopleSoft Order Management Integration with PeopleSoft Order Capture	236
PeopleSoft Billing Integration with PeopleSoft CRM 360 Degree View	237
PeopleSoft SCM Integration with PeopleSoft FieldService	237

Using CRM EIPs	237
CRM EIPs	237

Part 7

Integrating with Advanced Planning Products

Chapter 13

Integrating with Supply Chain Business Modeler	249
Understanding the PeopleSoft Supply Chain Management Integration with the Supply Chain Business Modeler	249
Exporting Data to Supply Chain Business Modeler	255
Page Used to Export Data to Supply Chain Business Modeler	256
Exporting Data to Supply Chain Business Modeler	256
Importing Data From Supply Chain Business Modeler	259
Page Used to Import Data From Supply Chain Business Modeler	260
Importing Data From Supply Chain Business Modeler	260

Chapter 14

Integrating with Oracle's Demantra Demand Management	263
Understanding Demantra Integration	263
Common Elements Used in This Chapter	266
Setting Up Calendar and Weight Profiles	267
Understanding Calendars	267
Pages Used to Set Up Calendar and Weight Profiles	268
Defining Calendar Patterns	269
Creating and Maintaining Calendars	269
Defining Calendar Periods	270
Defining Calendar Weight Profiles	273
Changing Daily Calendar Weights	274
Mapping PeopleSoft Fields To Demantra Fields	275
Pages Used to Map and Maintain Forecasting Fields	275
Defining Base Field Maps	275
Defining Customer Field Maps	278
Defining Sales Field Maps	280
Building and Reviewing Demand History	280
Understanding How to Build Demand History	281
Pages Used to Build and Review Demand History	281
Building Demand History	281

Reviewing Demand Data History	284
Exporting Data to Demantra	286
Understanding Data Export	286
Pages Used to Export Data to Demantra	287
Defining Export Specifications	287
Maintaining Export Controls	291
Exporting Demand	291
Importing Data from Demantra	292
Pages Used to Import Data From Demantra	293
Defining Import Specifications	293
Importing Forecasts	295
Reviewing and Updating Imported Forecasts	296
Pages Used to Review and Update Imported Forecasts	296
Defining Search Criteria for Reviewing Forecasts	296
Reviewing Forecast Item Details	297
Reviewing Forecast Period Data	299
Updating Imported Forecasts	300

Part 8

Integrating with Sales and Use Tax Applications

Chapter 15

Calculating Sales and Use Tax in Supply Chain Management	303
Understanding PeopleSoft Tax Solutions	303
Comparing PeopleSoft Tax Tables to Third-Party Tax Vendors	303
Understanding Tax Integration Technologies	304
Setting Up Third-Party Tax Solutions	306
Using Tax Product Groups	307
Associating Address Information with Geocodes	309
Understanding Geocodes	309
Page Used to Associate Address Information with Geocodes	309
Associating Addresses with Geocodes	309
Interacting with Third-Party Tax Vendors	310
Interacting with Third-Party Tax Solutions During Geocode Lookup	312
Interacting with Third-Party Tax Vendors During Online Tax Calculations	312
Interacting with Third-Party Tax Vendors During Invoicing	314
Interacting with Third-Party Tax Vendors During the Order Completion Process	314
Viewing Tax Calculation Errors in PeopleSoft Billing	315
Viewing Errors When Calculating Taxes Online	315
Viewing Errors When Calculating Taxes Through the Invoicing Process	315

Reviewing Third-Party Tax Liability Reporting	316
Comparing U.S. and Canadian Tax Support	316
Reviewing and Modifying Tax Jurisdiction Level Translation	316
Understanding Tax Authority Code Translation	317
Pages Used to Modify the Vertex O Series Tax Jurisdiction Translation Map	317
Modifying the Vertex O Series Tax Jurisdiction Translation Map	318

Chapter 16

Integrating With Vertex O Series	321
Understanding PeopleSoft Integration With Vertex O Series	321
Configuring Vertex O Series Integration	322
Pages Used to Configure Vertex O Series Integration	322
Activating the TAX_INTEGRATION Service Operation Queue	323
Activating the Service Operations	323
Activating the Routings	324
Activating the PSFT_TAX Node	324
Setting Up PeopleSoft Installation Options for Vertex O Series	324
Testing the Vertex O Series Integration	325

Chapter 17

Integrating With Vertex Q Series	327
Understanding PeopleSoft Business Interlinks to Vertex Q Series	327
Identifying Vertex Q Series Plug-in Locations	328
Identifying Vertex Q Series DLLs and Shared Library Locations	329
Setting Up Variables for the Vertex Database Location	329
Setting Up Vertex on a Microsoft Windows NT or Windows 2000 Platform	330
Setting Up Vertex on a UNIX Platform	331
Setting Up PeopleSoft Installation Options for Vertex Q Series	331
Testing the Vertex Q Series Installation	331
Troubleshooting Installation Errors	332

Chapter 18

Integrating With Taxware Enterprise	335
Understanding PeopleSoft Integration With Taxware Enterprise	335
Configuring Taxware Enterprise Integration	336
Pages Used to Configure Taxware Enterprise Integration	336
Activating the TAX_INTEGRATION Service Operation Queue	337
Activate the Service Operations	337

Activating the Routings	337
Activating the PSFT_TAX Node	338
Setting Up PeopleSoft Installation Options for Taxware Enterprise	338
Testing the Taxware Enterprise Integration	339

Chapter 19

Integrating with Taxware Sales and Use Tax	341
Understanding PeopleSoft Business Interlinks to Taxware Sales and Use Tax	341
Identifying Taxware Plug-in Locations	342
Identifying Taxware DLLs and Shared Library Locations	343
Setting Up Variables for the Taxware Database Location	343
Setting Up Taxware on a Microsoft Windows NT or Windows 2000 Platform	344
Setting Up Taxware on a UNIX Platform	344
Setting Up PeopleSoft Installation Options for Taxware Sales and Use Tax	344
Testing the Taxware Sales and Use Tax Installation	345
Troubleshooting Installation Errors	345

Appendix A

Scenarios for Integration With PeopleSoft Supply Chain Management	347
Understanding This Appendix	347
Common Elements in this Appendix	348
Example: Setting Up the Sales Order Load EIP	349
Understanding the Sales Order Load EIP	349
Page Used to Set Up the Sales Order Load EIP	350
Activating the Sales Order Load Service Operations	351
Verifying the Queue is in Run Mode	353
Activating the Handler	353
Activating the Routings	354
Confirming the Parameters of the Routing Definition	355
Verifying the Node is Active	356
Setting the Inbound File Rule for EDI Flat File Data	357
Setting the Inbound File Rule for Non-EDI Flat File Data	358
Example: Processing the Sales Order Load EIP	359
Pages Used to Process Sales Orders Load EIP	359
Loading EDI Flat File Data	360
Loading Non-EDI Flat File Data	361
Running Electronic Commerce	361
Correcting Errors	363
Completing the Orders	364
Example: Setting Up the Sales Order Acknowledgement EIP	365

Understanding the Sales Order Acknowledgment EIP	366
Pages Used to Set Up the Sales Order Acknowledgement EIP	367
Verifying Contacts	368
Activating the Sales Order Acknowledgement Service Operation	370
Verifying the Queue is in Run Mode	372
Activating the Handler	373
Activating the Routings	374
Confirming the Parameters of the Routing Definition	375
Verifying the Node is Active	377
Verifying the Node is Connected to the Network	377
Activate the Batch Publish Rule	378
Setting Up Chunking for the Batch Publish Rule	379
Example: Processing the Sales Order Acknowledgement EIP	380
Pages Used to Process the Sales Order Acknowledgement EIPs	380
Publishing Outbound Sales Order Acknowledgement Messages	380
Example: Setting Up the Purchase Order Dispatch EIP	382
Understanding the Purchase Order Dispatch EIP	382
Pages Used to Set Up the Purchase Order Dispatch EIP	383
Setting the Purchase Order Dispatch Method	384
Activating the Purchase Order Dispatch Service Operation	385
Verifying the Queue is in Run Mode	387
Activating the Handler	388
Activating the Routings	388
Confirming the Parameters of the Routing Definition	389
Verifying the Node is Active	390
Verifying the Node is Connected to the Network	391
Activate the Batch Publish Rule	392
Setting Up Chunking for the Batch Publish Rule	393
Example: Processing the Purchase Order Dispatch EIP	394
Pages Used to Process the Purchase Order EIP	395
Dispatching Purchase Orders	395
Publishing Outbound Purchase Order Messages	396
Example: Setting Up the Advanced Shipping Notice EIP	398
Understanding the Advanced Shipping Notice EIP	399
Pages Used to Set Up the Advanced Shipping Notice EIP	400
Enabling the Inventory Business Unit	401
Verifying Contacts	402
Activating the ASN Service Operation	404
Verifying the Queue is in Run Mode	406
Activating the Handler	407
Activating the Routings	407
Confirming the Parameters of the Routing Definition	408
Verifying the Node is Active	410
Verifying the Node is Connected to the Network	410
Activate the Batch Publish Rule	411

Setting Up Chunking for the Batch Publish Rule	412
Example: Processing the Advanced Shipping Notice EIP	413
Pages Used to Process the Advanced Shipping Notice EIP	414
Publishing Advanced Shipping Notices	414
Data Separation	416
Example: Setting Up the Billing Invoice EIP	416
Understanding the Billing Invoice EIP	416
Pages Used to Process Billing Invoices	417
Verifying Contacts	419
Activating the Billing Invoice Notice Service Operation	420
Verifying the Queue is in Run Mode	422
Activating the Handler	423
Activating the Routings	424
Confirming the Parameters of the Routing Definition	425
Verifying the Node is Active	426
Verifying the Node is Connected to the Network	427
Activating the Batch Publish Rule	428
Setting Up Chunking for the Batch Publish Rule	428
Publishing Billing Invoices	429
Pages Used to Process the Billing Invoice EIP	430
Publishing Billing Invoices	430

Appendix B

Helpful Hints for Integration With PeopleSoft Supply Chain Management	433
Understanding This Appendix	433
Helpful Hints About EIPs	433
Helpful Hints about Integration Broker in PeopleTools 8.48 and Higher	435

Index	437
--------------------	------------

PeopleSoft Supply Chain Management Integration Preface

This preface discusses:

- PeopleSoft application fundamentals.
- Common elements used in this PeopleBook.
- Pages with deferred processing.

Note. This PeopleBook documents only page elements that require additional explanation. If a page element is not documented with the process or task in which it is used, then it either requires no additional explanation or is documented with the common elements for the section, chapter, or PeopleBook.

PeopleSoft Application Fundamentals

The *PeopleSoft Supply Chain Management Integration 9.1 PeopleBook* provides you with implementation and processing information for the PeopleSoft system. However, additional, essential information describing the setup and design of the system resides in companion documentation. The companion documentation consists of important topics that apply to many or all of the Oracle's PeopleSoft Enterprise applications across the Financials, Enterprise Service Automation, and Supply Chain Management product lines. You should be familiar with the contents of these PeopleBooks.

The following companion PeopleBooks apply specifically to the *PeopleSoft Enterprise Supply Chain Management Integration 9.1 PeopleBook*.

- *PeopleSoft Enterprise Applications Fundamentals 9.1 PeopleBook*
- *Enterprise PeopleTools 8.50 PeopleBook: Integration Broker*
- *PeopleSoft Enterprise Components PeopleBook*

PeopleBooks and the Online PeopleSoft Library

A companion PeopleBook called *PeopleBooks and the Online PeopleSoft Library* contains general information, including:

- Understanding the PeopleSoft online library and related documentation.
- How to send PeopleSoft documentation comments and suggestions to Oracle.
- How to access hosted PeopleBooks, downloadable HTML PeopleBooks, and downloadable PDF PeopleBooks as well as documentation updates.
- Understanding PeopleBook structure.

- Typographical conventions and visual cues used in PeopleBooks.
- ISO country codes and currency codes.
- PeopleBooks that are common across multiple applications.
- Common elements used in PeopleBooks.
- Navigating the PeopleBooks interface and searching the PeopleSoft online library.
- Displaying and printing screen shots and graphics in PeopleBooks.
- How to manage the PeopleSoft online library including full-text searching and configuring a reverse proxy server.
- Understanding documentation integration and how to integrate customized documentation into the library.
- Glossary of useful PeopleSoft terms that are used in PeopleBooks.

You can find this companion PeopleBook in your PeopleSoft online library.

Common Elements Used in This PeopleBook

As of Date	The first date for which a report or process includes data.
BU or Business Unit	An identification code that represents a high-level organization of business information. You can use a business unit to define regional or departmental units within a larger organization.
Description	Freeflow text up to 256 characters.
Short Description	Freeflow text up to 15 characters.
Effective Date	Date which a table row becomes effective; the date that an action begins. For example, if you want to close a ledger on June 30, the effective date for the ledger closing would be July 1. This date also determines when you can view and change the information. Pages and batch processes that use the information use the current row. <i>See Enterprise PeopleTools 8.50 PeopleBook: Using PeopleSoft Applications</i>
Language or Language Code	The language of the field labels and report headings of reports to print. The filed values appear as you enter them. Language also refers to the language spoken by an employee, applicant, or non-employee.
Process Frequency	Designates the appropriate frequency to process: <i>Once</i>: executes the request the next time the batch process runs. After the batch process runs, the process frequency is automatically set to <i>Don't Run</i>. <i>Always Executes</i>: executes the request every time the batch process runs. <i>Don't Run</i>: Ignores the request when the batch process runs.

Process Monitor	View the status of submitted process requests. <i>See Enterprise PeopleTools 8.50 PeopleBook: PeopleSoft Process Scheduler</i>
Report ID	The report identifier.
Report Manager	View report content, check the status of a report, and see detailed messages. <i>See Enterprise PeopleTools 8.50 PeopleBook: PeopleSoft Process Scheduler</i>
Run Control ID	A request identification that represents a set of selection criteria for a report or process.
Run	Specify the location where a process or job runs and the process output format.
Status	Check the progress of a report or process. A valid status is <i>Posted, Not Posted, Generated, Processing, or Scheduled</i> .
User ID	The system identifier for the individual who generates a transactions.
Instance or Prcs Instance	The number that represents where the request is in the queue.

See Also

Enterprise PeopleTools 8.50 PeopleBook: PeopleSoft Application Designer

Part 1

Understanding SCM Integration

Chapter 1

Getting Started with Supply Chain Management Integration

Chapter 2

Understanding PeopleSoft Supply Chain Management Enterprise Integration Points

Chapter 3

Implementing Integrations

Chapter 4

Processing Enterprise Integration Points (EIPs)

Chapter 1

Getting Started with Supply Chain Management Integration

This section discusses supply chain management (SCM) integration documentation and implementations.

Navigating PeopleSoft SCM Integration Documentation

If you are using integration with the PeopleSoft Supply Chain Management (SCM) applications, please refer to this chapter to find the information you need.

PeopleSoft SCM provides powerful integration technology. You can integrate with specific application vendors or share transaction or definitional data directly with suppliers or customers.

We have information organized for functional users and technical implementers on how to set up and use enterprise integration points (EIPs) in PeopleSoft Supply Chain Management.

Integration Information Flow

When you're learning about EIPs, it is suggested that you follow the following order of information:

<i>Step</i>	<i>Documentation</i>	<i>Type of Information</i>	<i>Primary Audience</i>
Learning what EIPs are delivered with your application.	Application PeopleBooks	Functional descriptions of EIPs	Power users and managers
A high level understanding of the EIP architecture, and the types of technologies for which SCM delivers EIPs.	<i>PeopleSoft Enterprise Supply Chain Management Integration PeopleBook</i>	EIP overview information Descriptions of EIP groups integrating to specific technologies (warehouse management systems, electronic data collection, and so forth)	Power users and managers
How to set up EIPs and understand the delivered design patterns.	<i>PeopleSoft Enterprise Components PeopleBook</i>	EIP setup information Design pattern descriptions	Functional and technical implementers
Mapping EIP data	Interactive Services Repository	Technical details for each EIP	Functional and technical implementers

Step	Documentation	Type of Information	Primary Audience
Creating or customizing EIPs	<i>Enterprise PeopleTools 8.50 PeopleBook: Integration Broker</i>	Information on using this technology to create your own EIPs	Functional and technical implementers

Power Users and Managers

If you are looking for information on which EIPs to use and what they can do for you, you can find overview information as follows.

Area	Location
Overview of EIPs and integration technology	See Chapter 2, "Understanding PeopleSoft Supply Chain Management Enterprise Integration Points," page 7.
Functional description of individual EIPs.	The respective application PeopleBook.
EDI information	See <i>PeopleSoft Enterprise Electronic Data Interchange 9.1 PeopleBook</i> , "Understanding Electronic Data Interchange."
Warehouse Management Systems information	See Integrating to Warehouse Management Systems .
Healthcare application information	See Integrating to Healthcare Applications .
Electronic data collection information	See Integrating to Electronic Data Collection Systems .
Sales and Use Tax information	See Integrating with Sales and Use Tax Applications .
Transportation Management information	See Integrating with Transportation Management Systems .

Functional and Technical Implementers

Resources for technical information are in the Enterprise Integration section of the *PeopleSoft Enterprise Components PeopleBook*, *Enterprise PeopleTools 8.50 PeopleBook: Integration Broker*, and the Interactive Services Repository. There are also specific overview sections and examples in the *PeopleSoft Enterprise Supply Chain Management Integration 9.1 PeopleBook*.

Area	Location
EIP setup information	See Chapter 3, "Implementing Integrations," page 69. See Appendix A, "Scenarios for Integration With PeopleSoft Supply Chain Management," page 347.
Chunking information	See Chapter 3, "Implementing Integrations," Setting Up Chunking , page 75.

Area	Location
EIP processing Information	See Chapter 4, "Processing Enterprise Integration Points (EIPs)," Processing Inbound EIPs, page 91. See Chapter 4, "Processing Enterprise Integration Points (EIPs)," Processing Outbound EIPs, page 97. See Appendix A, "Scenarios for Integration With PeopleSoft Supply Chain Management," page 347. The respective application PeopleBook.
Inbound error handling	See Chapter 4, "Processing Enterprise Integration Points (EIPs)," Processing Inbound EIPs, page 91.
General technical information	<i>Enterprise PeopleTools 8.50 PeopleBook: Integration Broker</i>
Technical details for each EIP	For technical details about individual EIPs, use the Interactive Services Repository (ISR) in the My Oracle Support website located at https://support.oracle.com/CSP/ui/flash.html .
Inbound EIP (subscribe) specific information	See Chapter 4, "Processing Enterprise Integration Points (EIPs)," Processing Inbound EIPs, page 91. See Appendix A, "Scenarios for Integration With PeopleSoft Supply Chain Management," page 347.
Outbound EIP (publish) specific information	See Chapter 4, "Processing Enterprise Integration Points (EIPs)," Processing Outbound EIPs, page 97. See Appendix A, "Scenarios for Integration With PeopleSoft Supply Chain Management," page 347.

See Also

[Chapter 2, "Understanding PeopleSoft Supply Chain Management Enterprise Integration Points," page 7](#)

Integration Implementation

There are no table-loading implementation steps for integrations. In the planning phase of the implementation, take advantage of all PeopleSoft sources of information, including the installation guides, table-loading sequences, data models, and business process maps. A complete list of these resources appears in the preface in the *PeopleSoft Enterprise Applications Fundamentals 9.1 PeopleBook*, with information about where to find the most current version of each.

See Also

PeopleSoft Enterprise Application Fundamentals 9.1 PeopleBook, "Getting Started With PeopleSoft Enterprise Application Fundamentals"

PeopleSoft Enterprise Financials, ESA, ALM, and SCM Portal Packs 9.1 PeopleBook, "Configuring PeopleSoft Financials, ESA, ALM, and SCM Portal Packs"

Chapter 2

Understanding PeopleSoft Supply Chain Management Enterprise Integration Points

This chapter discusses:

- PeopleSoft Supply Chain Management (SCM) Inbound Enterprise Integration Points (EIPs).
- PeopleSoft SCM Outbound EIPs.
- Comprehensive list of SCM EIPs.


PeopleSoft SCM Inbound EIPs

Third-party systems can send information to PeopleSoft applications using a number of integration points established throughout the system. Depending on the application, various technologies provide multiple options for interacting with the PeopleSoft system. Each option provides audit trails, validations, and error handling to insure that data integrity is maintained within the PeopleSoft database.

Understanding the Inbound EIP Architecture

Depending on the requirements of the interacting system and the integration point within the PeopleSoft system, various technologies are used to receive transactions into the PeopleSoft system.

This diagram illustrates the methods used to receive inbound transactions to PeopleSoft, including transactions processed by the PeopleSoft Integration Broker, electronic data collection, and system generated transactions. This diagram also displays the methods of data validation, error handling, and database updates:

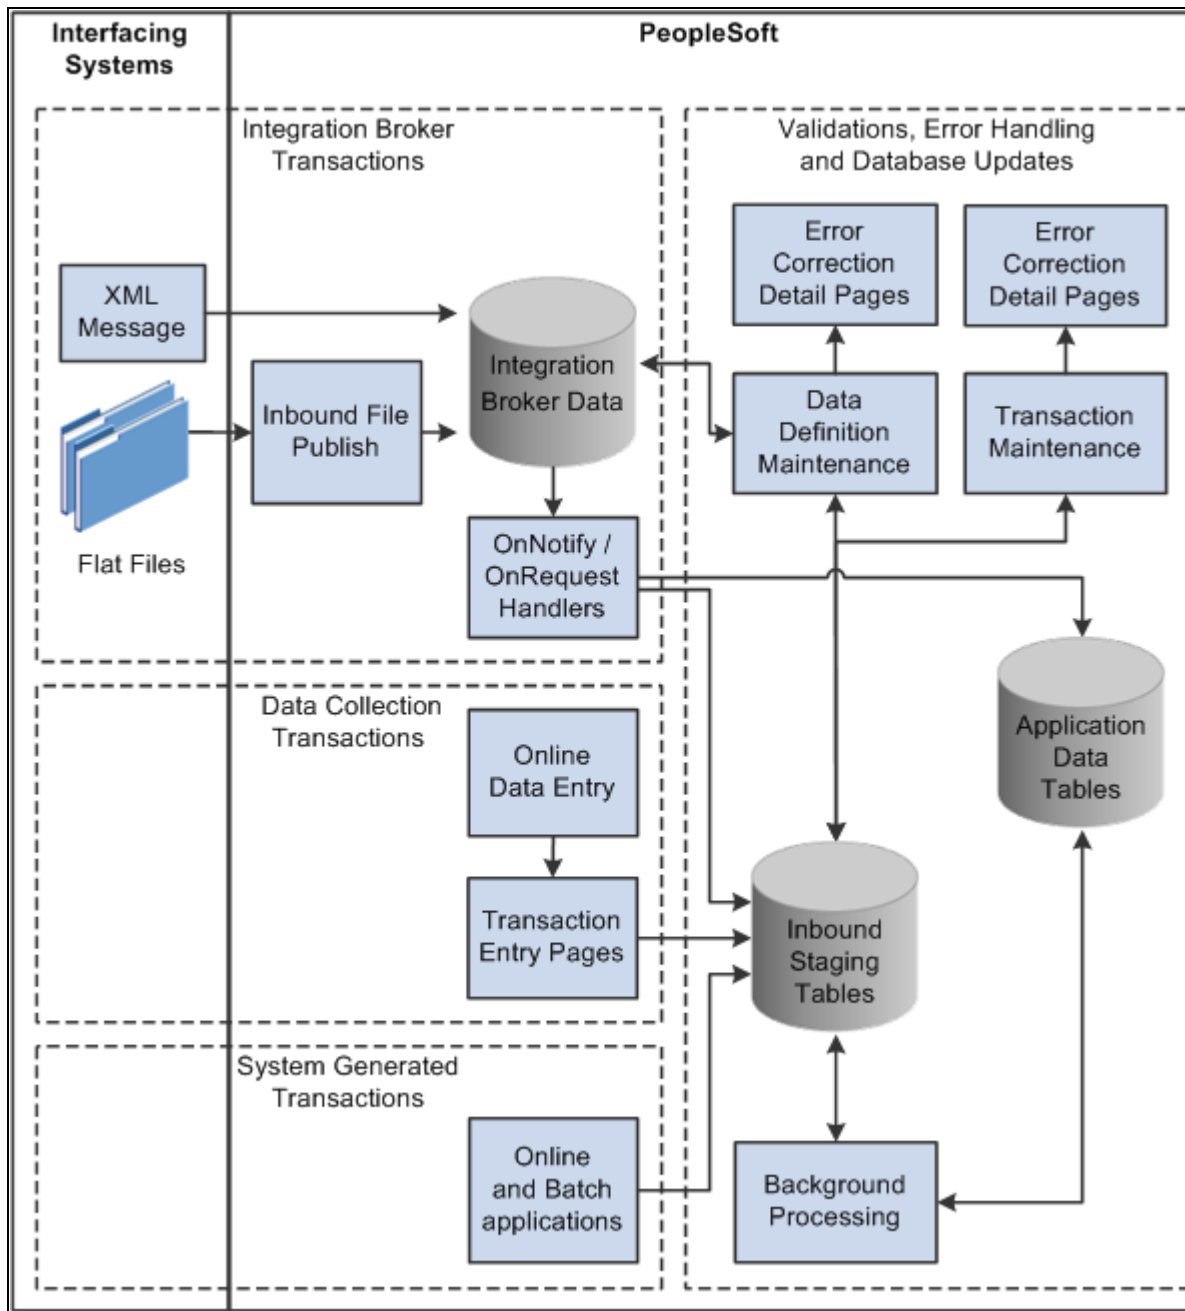

The methods of receiving inbound transactions.

Integration Broker Based Transaction

The PeopleSoft Integration Broker provides a method for communications between external systems and PeopleSoft applications using industry standard XML-formatted transactions. Transactions are automatically loaded into the PeopleSoft system by handlers associated with each service operation. Once transactions have been loaded into the PeopleSoft system, you can view all transactions in the transaction log and access detail pages that enable you to correct transaction errors. Most asynchronous EIPs load data into staging tables where background programs validate and process individual transactions within the service operation instance.

The Inbound File Publish utility, which utilizes the File Layout Object tool, may also be used to automatically convert flat file input to XML-based service operations. Examples are provided showing how to use this utility, and many PeopleSoft SCM electronic data interchange (EDI) transactions have been set up to take advantage of this feature.

See *PeopleSoft Enterprise Electronic Data Interchange 9.1 PeopleBook*, "Understanding Electronic Data Interchange."

Electronic Data Collection Transaction Pages

PeopleSoft SCM includes transaction pages for many of the inbound asynchronous transactions. The transaction pages are designed for quick data entry. There are minimal edits, and no application database updates are performed in these pages as the background programs scanning the transaction logs handle detail processing. The transaction pages provide a method of quick data entry for much of the transaction-based information processed by the system. You can enter the transactions directly onto the page, or attach a wedge and bar code reader to take advantage of bar code scanning benefits.

System-Generated Transactions

Several transactions that are fed in the transaction log are generated from internal application programs. By generating these transactions, applications push heavy processing functions to a background mode.

Validations, Error Handling, and Database Updates

Most inbound transactions, no matter which technology delivers them to the PeopleSoft system, are loaded into staging tables, where they are validated by background routines scanning these transaction logs awaiting incoming work. If errors are found, the transaction status in the transaction log is changed to *Error*, and rows are inserted into error tables for each error message.

Error messages appear on the Transaction Maintenance page for transactional type data such as, inventory adjustments and purchase order receipts. For definitional type data such as item master and bills of material, the Data Definition page is used to review and correct the erroneous information.

Once you have corrected the information and saved the page, the transaction is ready to be reprocessed.

Some transactions provide functionality to immediately validate and update application tables from subscription processes. For example, the Consumer and Par Location Count transactions both attempt to update the application tables, but if errors are found, the transactions write the data to the error tables so that corrections can be made.

See Also

Enterprise PeopleTools 8.50 PeopleBook: Integration Broker

PeopleSoft Enterprise Electronic Data Interchange 9.1 PeopleBook, "Understanding Electronic Data Interchange"

Chapter 9, "Using an Electronic Data Collection System," page 157

PeopleSoft Enterprise Manufacturing 9.1 PeopleBook, "Issuing Material to Production," Issuing Material Using Electronic Data Collection

PeopleSoft Enterprise Manufacturing 9.1 PeopleBook, "Issuing Material to Production," Processing Picking Plans Using Electronic Data Collection

PeopleSoft Enterprise Manufacturing 9.1 PeopleBook, "Issuing Material to Production," Processing Kit Issues and Returns Using Electronic Data Collection

PeopleSoft Enterprise Manufacturing 9.1 PeopleBook, "Recording Completions and Scrap Using Electronic Data Collection," Recording Completions Using Electronic Data Collection

PeopleSoft Enterprise Manufacturing 9.1 PeopleBook, "Recording Completions and Scrap Using Electronic Data Collection," Processing Other Electronic Data Collection Transactions

Chapter 4, "Processing Enterprise Integration Points (EIPs)," Using Transaction Maintenance, page 92

Chapter 4, "Processing Enterprise Integration Points (EIPs)," Using Data Definition Maintenance, page 93

PeopleSoft SCM Outbound EIPs

Outbound EIPs exist throughout the PeopleSoft system, providing interface points for third-party applications requiring information as activity occurs within the PeopleSoft system. Most of these integrations utilize PeopleSoft Integration Broker technology to format and send industry standard XML service operations. For example, as item master information is entered into PeopleSoft applications, the system uses XML-based service operations to notify third-party systems enabling them to use this information to maintain their own item master tables.

Understanding the Outbound Transaction Architecture

PeopleSoft SCM applications as well as interacting third-party systems have various processing and timing requirements that dictate when information can be generated or received. For this reason, the integration points provided by PeopleSoft utilize a number of different approaches when generating outbound service operations.


For example, a third-party system requiring item master information from the PeopleSoft Inventory application may want immediate incremental updates as information is changed online, or may want periodic updates on a nightly or weekly basis. The Item Master EIP provides both options, giving the third-party system the choice as to how it wants to receive this information.

Component or Incremental Publish

The system generates an incremental transaction immediately upon saving a component in various PeopleSoft applications. Components used to maintain information such as items or customers utilize the Component Publish approach.

Batch Publish

This diagram illustrates the batch publish process flow for outbound transactions. The Batch Publish Rules page is used to activate the batch publish rule for the service operations using the batch publish utility. Once PeopleSoft applications place transactions into the outbound staging tables, the Publish Outbound Message process retrieves the transaction data and calls the Batch Publish Utility to create XML or flat files for the receiving system:

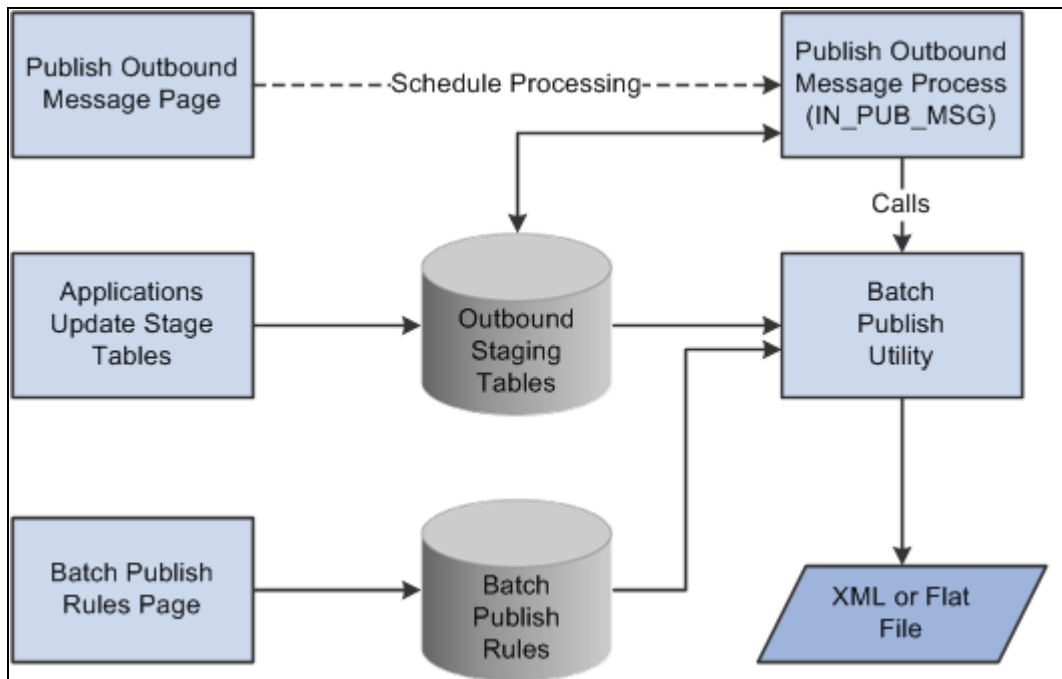

The process flow of outbound transactions when using the batch publish process utility.

The Integration Broker enables grouping many like transactions into a single service operation. Background processes that work on batches of transactions at one time utilize this approach.

In addition, other processes use this approach where interface requirements demand various groupings of like transactions based on common information within each transaction. For example, an Advanced Shipping Notice service operation can be sent to a customer when the customer's order is shipped within the PeopleSoft Inventory system. This transaction may go directly to the customer or it may go through third-party software that converts the XML to one of the industry standard EDI formats, such as X.12, before passing it on to the customer. Using the options available with the Batch Publish approach, users can dictate whether to create a single service operation for all customers to send to the third-party software or create individual service operations to send directly to each customer.

PeopleSoft SCM applications all use the Publish Outbound Message process to initiate the Batch Publish of outbound EIPs. Built into this routine is the Batch Publish utility, a common PeopleSoft tool that provides the functionality to group and filter or chunk transactions as noted in the previous example.

The Batch Publish utility also provides the option to create flat files instead of XML-based output, when file layout objects exist for transactions being generated. File layout objects are easy to modify, and PeopleSoft provides examples for all transactions included in the EDI feature.

See *PeopleSoft Enterprise Electronic Data Interchange 9.1 PeopleBook*, "Understanding Electronic Data Interchange."

Full Data Replication

Full data replication is the process used to seed, or initially populate or repopulate, a copy of an entire table onto a remote database or legacy system. The entire contents of the table are published to all systems that require a copy of the table. Generally, full data replication occurs with setup tables, or, relatively static, low volume tables keyed by setID.

Once a copy of the table exists, incremental updates provide a mechanism or process to keep the copy up-to-date with changes made on the master. Incremental updates occur most often with transaction tables, or frequently updated tables keyed by business unit.

Most full data replication service operation names end in _FULLSYNC.

Comprehensive List of SCM EIPs

PeopleSoft SCM provides a comprehensive group of inbound and outbound EIPs for you to use. This table lists all the EIPs delivered by SCM and provides cross reference information to the PeopleSoft applications that utilize that EIP.

Note. Some of the EIPs are shared by multiple SCM applications. Those EIPs that are shared are listed in the table under the primary application that maintains that EIP.

<i>PeopleSoft SCM Product</i>	<i>EIP</i>	<i>Object Name</i>	<i>Path</i>	<i>Type</i>	<i>Reference</i>
PeopleSoft Billing and PeopleSoft Order Management	Credit Card Authorize, Bill and Credit	CREDITCARD_TRANSACTION	Outbound	Sync	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Processing Credit Cards."

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Billing	CRM 360 Degree View	BI_EIP360_REQ BI_EIP360_RSP	Inbound and Outbound	Sync	See <i>PeopleSoft Enterprise Billing 9.1 PeopleBook</i> , "Integrating PeopleSoft CRM with Billing," Activating the Service Operation.
PeopleSoft Billing	Billing Invoice	BILLING_INVOICE_NOTICE	Outbound	Async	See <i>PeopleSoft Enterprise Billing 9.1 PeopleBook</i> , "Processing EDI Transactions in PeopleSoft Billing."
PeopleSoft Billing	Billing Invoice	EDI_TXN_810 Note. EDI_TXN_810 is the BILLING_INVOICE_NOTICE in X.12 EDI format.	Outbound	Async	See <i>PeopleSoft Enterprise Billing 9.1 PeopleBook</i> , "Processing EDI Transactions in PeopleSoft Billing."
PeopleSoft Billing	Bill Source Fullsync	BILL_SOURCE_FULLSYNC	Outbound	Async	See <i>PeopleSoft Enterprise Billing 9.1 PeopleBook</i> , "Integrating PeopleSoft CRM with Billing," Setting up Bill Type, Bill Source, and Tax Header EIPs.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Billing	Bill Source Sync	BILL_SOURCE_SYNC	Outbound	Async	See <i>PeopleSoft Enterprise Billing 9.1 PeopleBook</i> , "Integrating PeopleSoft CRM with Billing," Setting up Bill Type, Bill Source, and Tax Header EIPs.
PeopleSoft Billing	Bill Type Fullsync	BILL_TYPE_FULLSYNC	Outbound	Async	See <i>PeopleSoft Enterprise Billing 9.1 PeopleBook</i> , "Integrating PeopleSoft CRM with Billing," Setting up Bill Type, Bill Source, and Tax Header EIPs.
PeopleSoft Billing	Bill Type Sync	BILL_TYPE_SYNC	Outbound	Async	See <i>PeopleSoft Enterprise Billing 9.1 PeopleBook</i> , "Integrating PeopleSoft CRM with Billing," Setting up Bill Type, Bill Source, and Tax Header EIPs.
PeopleSoft Billing, Order Management , Purchasing, and Accounts Payable	Geocode Request	GET_GEOCODE_REQ GET_GEOCODE_RES Note. These EIPs can be used with any third-party tax calculation systems.	Inbound and Outbound	Sync	See Chapter 18, "Integrating With Taxware Enterprise," page 335.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Billing and PeopleSoft Order Management	Tax Calculation	TAXWARE_CALCTAX	Outbound	Sync	See Chapter 15, "Calculating Sales and Use Tax in Supply Chain Management," page 303.
PeopleSoft Billing and PeopleSoft Order Management	Tax Calculation	VERTEX_CALCTAX	Outbound	Sync	See Chapter 15, "Calculating Sales and Use Tax in Supply Chain Management," page 303.
PeopleSoft Billing, Order Management , Purchasing, and Accounts Payable	Tax Calculation Request	DO_TAXCALC_REQ DO_TAXCALC_RES Note. These EIPs can be used with any third-party tax calculation systems.	Inbound and Outbound	Sync	See Chapter 18, "Integrating With Taxware Enterprise," page 335.
PeopleSoft Billing	Tax Code Fullsync	TAX_HEADER_TBL_FULLSYNC	Outbound	Async	See PeopleSoft Enterprise Billing 9.1 PeopleBook, "Integrating PeopleSoft CRM with Billing," Setting up Bill Type, Bill Source, and Tax Header EIPs.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Billing and PeopleSoft Order Management	Tax Geocode	TAXWARE_GEOCODES	Outbound	Sync	See Chapter 15, "Calculating Sales and Use Tax in Supply Chain Management," Associating Address Information with Geocodes, page 309. See Integrating with Sales and Use Tax Applications.
PeopleSoft Billing and PeopleSoft Order Management	Tax Geocode	VERTEX_GEOCODES	Outbound	Sync	See Chapter 15, "Calculating Sales and Use Tax in Supply Chain Management," Associating Address Information with Geocodes, page 309. See Integrating with Sales and Use Tax Applications.
PeopleSoft Billing, Order Management , Purchasing, and Accounts Payable	Vertex Tax Area Request	GET_VERTEX_TAXAREA_REQ GET_VERTEX_TAXAREA_RES	Inbound and Outbound	Sync	See Chapter 16, "Integrating With Vertex O Series," page 321.
PeopleSoft Billing, Order Management , Purchasing, and Accounts Payable	Vertex Tax Calculation Request	DO_VERTEX_TAXCALC_REQ DO_VERTEX_TAXCALC_RES	Inbound and Outbound	Sync	See Chapter 16, "Integrating With Vertex O Series," page 321.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Enterprise Pricer	Arbitration Plan	ARBITRATION_PLAN_FULLSYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Pricer 9.1 PeopleBook</i> , "Using Pricing Data Enterprise Integration Points."
PeopleSoft Enterprise Pricer	Arbitration Plan	ARBITRATION_PLAN_SYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Pricer 9.1 PeopleBook</i> , "Using Pricing Data Enterprise Integration Points."
PeopleSoft Enterprise Pricer	Price List	PRICE_LIST_DETAIL_FULLSYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Pricer 9.1 PeopleBook</i> , "Using Pricing Data Enterprise Integration Points."
PeopleSoft Enterprise Pricer	Price List	PRICE_LIST_DETAIL_SYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Pricer 9.1 PeopleBook</i> , "Using Pricing Data Enterprise Integration Points."
PeopleSoft Enterprise Pricer	Price List	PRICE_LIST_FULLSYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Pricer 9.1 PeopleBook</i> , "Using Pricing Data Enterprise Integration Points."

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Enterprise Pricer	Price List	PRICE_LIST_HEADER_FULLSYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Pricer 9.1 PeopleBook</i> , "Using Pricing Data Enterprise Integration Points."
PeopleSoft Enterprise Pricer	Price List	PRICE_LIST_HEADER_SYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Pricer 9.1 PeopleBook</i> , "Using Pricing Data Enterprise Integration Points."
PeopleSoft Enterprise Pricer	Price List	PRICE_LIST_SYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Pricer 9.1 PeopleBook</i> , "Using Pricing Data Enterprise Integration Points."
PeopleSoft Enterprise Pricer	Price Rule	PRICE_RULE_DATA_FULLSYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Pricer 9.1 PeopleBook</i> , "Using Pricing Data Enterprise Integration Points."
PeopleSoft Enterprise Pricer	Price Rule	PRICE_RULE_DATA_SYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Pricer 9.1 PeopleBook</i> , "Using Pricing Data Enterprise Integration Points."

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Enterprise Pricer	Price Rule	PRICE_RULE_KEYS_FULLSYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Pricer 9.1 PeopleBook</i> , "Using Pricing Data Enterprise Integration Points."
PeopleSoft eProcurement	Direct Connect	PV_CXML1_ORDER	Outbound	Sync	See <i>PeopleSoft Enterprise eProcurement 9.1 PeopleBook</i> , "Integrating with Direct Connect Suppliers."
PeopleSoft eProcurement	Direct Connect	PV_CXML1_POOM	Outbound	Sync	See <i>PeopleSoft Enterprise eProcurement 9.1 PeopleBook</i> , "Integrating with Direct Connect Suppliers."
PeopleSoft eProcurement	Direct Connect	PV_CXML1_POSR	Outbound	Sync	See <i>PeopleSoft Enterprise eProcurement 9.1 PeopleBook</i> , "Integrating with Direct Connect Suppliers."
PeopleSoft eProcurement	ePro Availability Check	PV_AVAIL_CHECK_REQ PV_AVAIL_CHECK_RESP	Outbound	Sync	See <i>PeopleSoft Enterprise eProcurement 9.1 PeopleBook</i> , "Integrating with a Marketplace," Using Price and Availability Check.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft eProcurement	Requisition Approval Email	PV_EMAIL_REQ_APPROVAL	Outbound	Async	See <i>PeopleSoft Enterprise eProcurement 9.1 PeopleBook</i> , "Using the Approval Framework in PeopleSoft eProcurement," Setting Up Email Approvals for PeopleSoft eProcurement.
PeopleSoft eProcurement	ePro Direct Connect	PV_DC_CONNECT_REQST PV_DC_CONNECT_RESP	Outbound	Sync	See <i>PeopleSoft Enterprise eProcurement 9.1 PeopleBook</i> , "Integrating with Direct Connect Suppliers," Setting Up Direct Connect.
PeopleSoft eProcurement	ePro Direct Connect	PV_ORDER_REQ PV_ORDER_RESP	Outbound	Sync	See <i>PeopleSoft Enterprise eProcurement 9.1 PeopleBook</i> , "Integrating with a Marketplace," Activating Service Operations.
PeopleSoft eProcurement	ePro Order Status	PV_ORD_STS_REQ PV_ORD_STS_RESP	Outbound	Sync	See <i>PeopleSoft Enterprise eProcurement 9.1 PeopleBook</i> , "Integrating with a Marketplace," Activating Service Operations.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft eProcurement	ePro Price Check	PV_PRICE_CHECK_REQ PV_PRICE_CHECK_RESP	Outbound	Sync	See <i>PeopleSoft Enterprise eProcurement 9.1 PeopleBook</i> , "Integrating with a Marketplace," Activating Service Operations.
PeopleSoft eProcurement	ePro Procurement Order	PV_ORDER	Outbound	Async	See <i>PeopleSoft Enterprise eProcurement 9.1 PeopleBook</i> , "Integrating with a Marketplace," Activating Service Operations.
PeopleSoft eProcurement	ePro xCBL Order	PV_ORDER_XCBL3	Outbound	Async	See <i>PeopleSoft Enterprise eProcurement 9.1 PeopleBook</i> , "Dispatching Purchase Orders in PeopleSoft eProcurement," Setting Up Dynamic Dispatching.
PeopleSoft eProcurement	ePro Requisition Approval email	PV_EMAIL_REQ_APPROVAL	Inbound	Async	See <i>PeopleSoft Enterprise Approval Framework 9.1 PeopleBook</i>
PeopleSoft eProcurement	Marketplace Integration	PV_MS_PODISPATCH	Outbound	Sync	See <i>PeopleSoft Enterprise eProcurement 9.1 PeopleBook</i> , "Integrating with Direct Connect Suppliers."

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft eProcurement	Marketplace Integration	PV_MS_RESP_MSG	Inbound	Async	See <i>PeopleSoft Enterprise eProcurement 9.1 PeopleBook</i> , "Integrating with a Marketplace," Marketplace EIPs.
PeopleSoft Flow Production	Kanban ID Import and Replenishment Request	PRODUCTION_REPLENISHMENT_REQ	Inbound	Async	See <i>PeopleSoft Enterprise Flow Production 9.1 PeopleBook</i> , "Maintaining Kanban Cards and Replenishment Requests."
PeopleSoft Flow Production	Replenishment Request Dispatch	REPLENISHMENT_REQUEST_DISPATCH	Outbound	Async	See <i>PeopleSoft Enterprise Flow Production 9.1 PeopleBook</i> , "Maintaining Kanban Cards and Replenishment Requests."
PeopleSoft Inventory	Advance Shipping Notice	ADVANCED_SHIPPING_NOTICE	Outbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Creating Shipping Documentation," Creating Advanced Shipping Notices.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Inventory	Consumer	CONSUMER_SYNC	Inbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Tracking Material Usage," Importing Consumer Information with the Consumer Message EIP.
PeopleSoft Inventory	Consumer Usage	CONSUMER_USAGE	Outbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Tracking Material Usage," Exporting Consumer Usage Information.
PeopleSoft Inventory and PeopleSoft Purchasing	Get PO IUT	GET_POIUT_INFO	Inbound	Sync	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Understanding Order Fulfillment Processing," Purchase Order and InterUnit Transfer Information Business Interlink.
PeopleSoft Inventory	GTIN Data Notification	GTIN_DATA_NOTIFICATION	Outbound	Async	See <i>PeopleSoft Enterprise Managing Items 9.1 PeopleBook</i> , "Working with Items," Using Universal Item Identifiers.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Inventory	Inventory Stock Level Inquiry	IN_STOCK_LEVELS	Outbound	Sync	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Inquiring and Reporting About On-Hand Stock," Viewing Item Balances.
PeopleSoft Inventory	Internal Location Expected Receipt	INTERNAL_LOC_EXPECTED_RECEIPT	Outbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Creating Shipping Documentation," Creating Internal Location Expected Receipts.
PeopleSoft Inventory	Interunit Expected Receipt	INTERUNIT_EXPECTED_RECEIPT	Outbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Creating Shipping Documentation," Creating Interunit Expected Receipts.
PeopleSoft Inventory	Interunit Receipt	INTERUNIT_RECEIPT	Inbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Receiving and Putting Away Stock," Staging Interunit Transfers Using an Electronic Data Collection System.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Inventory	Inventory Adjustment	INVENTORY_ADJUSTMENT	Inbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Making Stock Quantity Adjustments and Transfers Within the Business Unit," Making Adjustments Using the Inventory Adjustment EIP.
PeopleSoft Inventory	Inventory Create Stock Request	INVENTORY_CREATE_STOCK_REQUEST	Inbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Creating Orders for Fulfillment," Creating Orders Using Data From a Third-Party System.
PeopleSoft Inventory	Inventory Balance Notification	INV_BAL_NOTIF_BUS_UNIT	Outbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Inquiring and Reporting About On-Hand Stock," Providing Inventory Balances to Third-Party Systems.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Inventory	Inventory Balance Notification	INV_BAL_NOTIF_VENDOR	Outbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Inquiring and Reporting About On-Hand Stock," Providing Inventory Balances to Third-Party Systems.
PeopleSoft Inventory	Inventory by Location	INVENTORY_BY_LOC_REQ INVENTORY_BY_LOC_RSP	Inbound	Sync	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Inquiring and Reporting About On-Hand Stock," Providing Inventory Balances to Third-Party Systems.
PeopleSoft Inventory	Inventory Freight Rate Request	INVENTORY_FREIGHT_RATE_REQUEST	Outbound	Sync	See <i>PeopleSoft Enterprise Supply Chain Management Common Information 9.1 PeopleBook</i> , "Defining External Third-Party Freight Integration," Enabling the PeopleSoft EIPs for Third-Party Freight.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Inventory	Inventory Freight Request	INVENTORY_FREIGHT_REQUEST	Outbound	Async	See <i>PeopleSoft Enterprise Supply Chain Management Common Information 9.1 PeopleBook</i> , "Defining External Third-Party Freight Integration," Enabling the PeopleSoft EIPs for Third-Party Freight.
PeopleSoft Inventory	Inventory Freight Response	INVENTORY_FREIGHT_RESPONSE	Inbound	Async	See <i>PeopleSoft Enterprise Supply Chain Management Common Information 9.1 PeopleBook</i> , "Defining External Third-Party Freight Integration," Enabling the PeopleSoft EIPs for Third-Party Freight.
PeopleSoft Inventory	Inventory Freight Ship Request	INVENTORY_FREIGHT_SHIP_REQUEST	Outbound	Sync	See <i>PeopleSoft Enterprise Supply Chain Management Common Information 9.1 PeopleBook</i> , "Defining External Third-Party Freight Integration," Enabling the PeopleSoft EIPs for Third-Party Freight.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Inventory	Inventory Front End Shipping	INVENTORY_FRONT_END_SHIPPING	Inbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Utilizing the Fulfillment Engine," Setting up the Fulfillment Engine EIPs.
PeopleSoft Inventory	Inventory Pick Confirm	INVENTORY_PICK_CONFIRM	Inbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Utilizing the Fulfillment Engine," Setting up the Fulfillment Engine EIPs.
PeopleSoft Inventory	Inventory Picking	INVENTORY_PICKING	Inbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Picking Inventory," Entering Picking Feedback Using an Electronic Data Collection System.
PeopleSoft Inventory	Inventory Putaway	INVENTORY_PUTAWAY	Inbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Receiving and Putting Away Stock," Entering Stockroom Feedback Using an Electronic Data Collection System.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Inventory	Inventory Reservation	INVENTORY_RESERVATION	Inbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Utilizing the Fulfillment Engine," Setting up the Fulfillment Engine EIPs.
PeopleSoft Inventory	Inventory Shipping	INVENTORY_SHIPPING	Inbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Utilizing the Fulfillment Engine," Setting up the Fulfillment Engine EIPs.
PeopleSoft Inventory	Inventory Shipping Container	INVENTORY_SHIP_CNTR	Inbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Packing Orders for Shipment," Working with Shipping Containers and Shipping Serial IDs Using an Electronic Data Collection System.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Inventory	Inventory Shipping Serial ID	INVENTORY_SHIP_SERIAL	Inbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Packing Orders for Shipment," Working with Shipping Containers and Shipping Serial IDs Using an Electronic Data Collection System.
PeopleSoft Inventory	Inventory Transfer	INVENTORY_TRANSFER	Inbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Making Stock Quantity Adjustments and Transfers Within the Business Unit," Transferring Materials Using the Inventory Transfer EIP.
PeopleSoft Inventory	Work Order Issues Component Interface	INVENTORY_WO_ISSUES	Inbound	Sync	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Fulfilling Work Orders from Maintenance Management," Using the Inventory Work Order Issues Service Operation and Component Interface.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Inventory	Item Master	ITEM_CRM_FULLSYNC_EFF	Outbound	Async	See <i>PeopleSoft Enterprise Managing Items 9.1 PeopleBook</i> , "Loading Items."
PeopleSoft Inventory	Item Master	ITEM_CRM_SYNC	Outbound	Async	See <i>PeopleSoft Enterprise Managing Items 9.1 PeopleBook</i> , "Loading Items."
PeopleSoft Inventory	Item Master	ITEM_CRM_SYNC_EFF	Outbound	Async	See <i>PeopleSoft Enterprise Managing Items 9.1 PeopleBook</i> , "Loading Items."
PeopleSoft Inventory	Item Master	ITEM_FULLSYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Managing Items 9.1 PeopleBook</i> , "Loading Items," Understanding Item Price List and Item Master EIPs.
PeopleSoft Inventory	Item Master	ITEM_FULLSYNC_EFF	Outbound	Async	See <i>PeopleSoft Enterprise Managing Items 9.1 PeopleBook</i> , "Loading Items," Understanding Item Price List and Item Master EIPs.

<i>PeopleSoft SCM Product</i>	<i>EIP</i>	<i>Object Name</i>	<i>Path</i>	<i>Type</i>	<i>Reference</i>
PeopleSoft Inventory and PeopleSoft Manufacturing	Item Master	ITEM_SYNC	Inbound	Async	See <i>PeopleSoft Enterprise Managing Items 9.1 PeopleBook</i>, "Loading Items," Understanding Item Price List and Item Master EIPs. See <i>PeopleSoft Enterprise Manufacturing 9.1 PeopleBook</i>, "Integrating Oracle's PeopleSoft Manufacturing with Product Life Cycle Management Applications Using PDX 1.0 XML."

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Inventory and PeopleSoft Manufacturing	Item Master	ITEM_SYNC PDX_MSG Note. PDX_MSG allows inbound integration using Agile PDX format	Outbound	Async	See <i>PeopleSoft Enterprise Managing Items 9.1 PeopleBook</i> , "Loading Items," Understanding Item Price List and Item Master EIPs. See <i>PeopleSoft Enterprise Managing Items 9.1 PeopleBook</i> , "Loading Items." See <i>PeopleSoft Enterprise Manufacturing 9.1 PeopleBook</i> , "Integrating Oracle's PeopleSoft Manufacturing with Product Life Cycle Management Applications Using PDX 1.0 XML."
PeopleSoft Inventory	Item Master	ITEM_SYNC_EFF	Outbound	Async	See <i>PeopleSoft Enterprise Managing Items 9.1 PeopleBook</i> , "Loading Items," Understanding Item Price List and Item Master EIPs. See <i>PeopleSoft Enterprise Managing Items 9.1 PeopleBook</i> , "Loading Items."

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Inventory and PeopleSoft Purchasing	Item Price List	ITEM_PRICELIST_LOAD	Inbound	Async	See <i>PeopleSoft Enterprise Managing Items 9.1 PeopleBook</i> , "Loading Items," Understanding Item Price List and Item Master EIPs.
PeopleSoft Inventory	Par Location	PAR_LOCATION_FULLSYNC	Outbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Managing Par Inventory," Counting Par Location Inventory.
PeopleSoft Inventory	Par Location	PAR_LOCATION_SYNC	Outbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Managing Par Inventory," Counting Par Location Inventory.
PeopleSoft Inventory	Par Location Count	PAR_LOCATION_COUNT	Inbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Managing Par Inventory," Uploading Count Results Using the Par Location Count EIP.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Inventory	Physical Inventory	PHYSICAL_INVENTORY	Inbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Counting Inventory Stock," Collecting Counting Data using the Physical Inventory EIP.
PeopleSoft Inventory	Product Availability	PSPRODAVAIL	Sync	Inbound	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Inquiring and Reporting About On-Hand Stock," Providing Item Availability Checks to Third-Party Systems.
PeopleSoft Inventory	Product Availability Inquiry	PRODUCT_AVAILABILITY PRODUCT_AVAILABILITY	Outbound	Sync	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Inquiring and Reporting About On-Hand Stock," Providing Item Availability Checks to Third-Party Systems.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Inventory	Returned Material Authorization	RMA_LOAD	Inbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Receiving and Putting Away Stock," Staging Interunit Transfer and RMA Receipts.
PeopleSoft Inventory	Shipping Order Release	SHIPPING_ORDER_RELEASE	Outbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Picking Inventory," Creating Shipping Order Release EIPs.
PeopleSoft Inventory	Shipping Notification	SHIPPING_NOTIFICATION	Inbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Understanding Order Fulfillment Processing," EIPs for Fulfillment Transactions.
PeopleSoft Inventory	Transportation Notification	TMS_LOAD_NOTIFICATION	Inbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Understanding Order Fulfillment Processing," Transportation Management System EIPs.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Inventory	Transportation Notification	TMS_LOAD_NOTIFICATION TMS_LOAD_NOTIFICATION_RESP	Inbound	Sync	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Understanding Order Fulfillment Processing," Transportation Management System EIPs.
PeopleSoft Inventory	Transportation Order	TMS_ORDER_RELEASE	Outbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Understanding Order Fulfillment Processing," Transportation Management System EIPs.
PeopleSoft Inventory	VMI Expected Receipts	VMI_EXPECTED_RECEIPT	Outbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Using Vendor Managed Inventory," Creating and Using VMI Enterprise Integration Points.
PeopleSoft Inventory	VMI Interunit Receipt	VMI_INTERUNIT_RECEIPT	Inbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Using Vendor Managed Inventory," Creating and Using VMI Enterprise Integration Points.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Inventory	VMI Inventory Adjustment	VMI_INVENTORY_ADJUSTMENT	Inbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Using Vendor Managed Inventory," Creating and Using VMI Enterprise Integration Points.
PeopleSoft Inventory	VMI Quantity on Hand	VMI_QUANTITY_ON_HAND	Inbound	Async	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Using Vendor Managed Inventory," Creating and Using VMI Enterprise Integration Points.
PeopleSoft Manufacturing	Actual Hours	PRODUCTION_ACTUAL_HOURS	Inbound	Async	See <i>PeopleSoft Enterprise Manufacturing 9.1 PeopleBook</i> , "Completing Operations and Recording Scrap," Recording and Viewing Actual Machine and Labor Hours.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Manufacturing	Bill of Material	BOM_SYNC	Inbound	Async	See <i>PeopleSoft Enterprise Manufacturing 9.1 PeopleBook</i> , "Understanding PeopleSoft Bills of Material and Routings," Importing Bills of Material from External Sources. See <i>PeopleSoft Enterprise Manufacturing 9.1 PeopleBook</i> , "Integrating Oracle's PeopleSoft Manufacturing with Product Life Cycle Management Applications Using PDX 1.0 XML."
PeopleSoft Manufacturing	Production Completions	PRODUCTION_ORDER_COMPLETION	Inbound	Async	See <i>PeopleSoft Enterprise Manufacturing 9.1 PeopleBook</i> , "Recording Completions and Scrap Using Electronic Data Collection," Processing Electronic Data Collection Completions Transactions.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Manufacturing	Production Order Issue	PRODUCTION_ORDER_ISSUE	Inbound	Async	See <i>PeopleSoft Enterprise Manufacturing 9.1 PeopleBook</i> , "Recording Completions and Scrap Using Electronic Data Collection."
PeopleSoft Manufacturing	Production Order Update	PRODUCTION_ORDER_UPDATE	Outbound	Async	See <i>PeopleSoft Enterprise Manufacturing 9.1 PeopleBook</i> , "Maintaining Production Orders and Production Schedules."
PeopleSoft Manufacturing	Production Picking	PRODUCTION_PICKING	Inbound	Async	See <i>PeopleSoft Enterprise Manufacturing 9.1 PeopleBook</i> , "Issuing Material to Production," Processing Picking Plans Using Electronic Data Collection.
PeopleSoft Manufacturing	Production Serial Association	PRODUCTION_SERIAL_ASSOCIATION	Inbound	Async	See <i>PeopleSoft Enterprise Manufacturing 9.1 PeopleBook</i> , "Using Serial Genealogy in PeopleSoft Manufacturing."

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Order Management	Carrier/Shippin g Method	CARRIER_FULLSYNC	Outbou nd	Async	See <i>PeopleSoft Enterprise Application Fundamentals 9.1 PeopleBook</i> , "Defining Financials and Supply Chain Management Common Definitions," Establishing Carriers.
PeopleSoft Order Management	Carrier/Shippin g Method	CARRIER_FULLSYNC_EFF	Outbou nd	Async	See <i>PeopleSoft Enterprise Application Fundamentals 9.1 PeopleBook</i> , "Defining Financials and Supply Chain Management Common Definitions," Establishing Carriers.
PeopleSoft Order Management	Carrier/Shippin g Method	CARRIER_SYNC	Inbound and Outbou nd	Async	See <i>PeopleSoft Enterprise Application Fundamentals 9.1 PeopleBook</i> , "Defining Financials and Supply Chain Management Common Definitions," Establishing Carriers.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Order Management	Carrier/Shippin g Method	CARRIER_SYNC_EFF	Outbou nd	Async	See <i>PeopleSoft Enterprise Application Fundamentals 9.1 PeopleBook</i> , "Defining Financials and Supply Chain Management Common Definitions," Establishing Carriers.
PeopleSoft Order Management	Contact	CONTACT_FULLSYNC	Inbound and Outbou nd	Async	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Maintaining Contacts," Setting Up Contacts.
PeopleSoft Order Management	Contact	CONTACT_FULLSYNC_EFF	Outbou nd	Async	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Maintaining Contacts," Setting Up Contacts.
PeopleSoft Order Management	Contact	CONTACT_SYNC	Inbound and Outbou nd	Async	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Maintaining Contacts," Setting Up Contacts.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Order Management	Contact	CONTACT_SYNC_EFF	Outbound	Async	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Maintaining Contacts," Setting Up Contacts.
PeopleSoft Order Management	Contact	CONTACT_SYNC_REQ CONTACT_SYNC_REQ_CALLBACK	Inbound	Async Req/Resp	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Maintaining Contacts," Setting Up Contacts.
PeopleSoft Order Management	Customer	CUSTOMER_FULLSYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Maintaining General Customer Information," Adding General Customer Information.
PeopleSoft Order Management	Customer	CUSTOMER_FULLSYNC_EFF	Outbound	Async	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Maintaining General Customer Information," Adding General Customer Information.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Order Management	Customer	CUSTOMER_SYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Maintaining General Customer Information," Adding General Customer Information.
PeopleSoft Order Management	Customer	CUSTOMER_SYNC_EFF	Outbound	Async	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Maintaining General Customer Information," Adding General Customer Information.
PeopleSoft Order Management	Customer	CUSTOMER_SYNC_REQ CUSTOMER_SYNC_REQ_CALLBACK	Inbound	Async Req/Resp	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Maintaining General Customer Information," Adding General Customer Information.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Order Management	Customer Group	CUSTOMER_GROUP_FULLSYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Maintaining General Customer Information," Adding General Customer Information.
PeopleSoft Order Management	Customer Group	CUSTOMER_GROUP_FULLSYNC_EFF	Outbound	Async	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Maintaining General Customer Information," Adding General Customer Information.
PeopleSoft Order Management	Customer Group	CUSTOMER_GROUP_SYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Maintaining General Customer Information," Adding General Customer Information.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Order Management	Customer Group	CUSTOMER_GROUP_SYNC_EFF	Outbound	Async	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Maintaining General Customer Information," Adding General Customer Information.
PeopleSoft Order Management	Customer Group	CUSTOMER_GROUP_SYNC_REQ CUSTOMER_GROUP_SYNC_REQ_C ALLBACK	Inbound	Async Req/Resp	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Maintaining General Customer Information," Adding General Customer Information.
PeopleSoft Order Management	Order Status	OrderTracking	Inbound	Sync	<i>PeopleSoft CRM Sales Force Automation PeopleBook</i>
PeopleSoft Order Management	Product	PRODUCT_FULLSYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Setting Up Products," Understanding Product Load EIPs.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Order Management	Product	PRODUCT_FULLSYNC_EFF	Outbound	Async	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Setting Up Products," Understanding Product Load EIPs.
PeopleSoft Order Management	Product	PRODUCT_SYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Setting Up Products," Understanding Product Load EIPs.
PeopleSoft Order Management	Product	PRODUCT_SYNC_EFF	Outbound	Async	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Setting Up Products," Understanding Product Load EIPs.
PeopleSoft Order Management	Product Group	PRODUCT_GROUP_FULLSYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Setting Up Products," Understanding Product Load EIPs.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Order Management	Product Group	PRODUCT_GROUP_FULLSYNC_EFF	Outbound	Async	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Setting Up Products," Understanding Product Load EIPs.
PeopleSoft Order Management	Product Group	PRODUCT_GROUP_SYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Setting Up Products," Understanding Product Load EIPs.
PeopleSoft Order Management	Product Group	PRODUCT_GROUP_SYNC_EFF	Outbound	Async	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Setting Up Products," Understanding Product Load EIPs.
PeopleSoft Order Management	Product Price List/Catalog	PRODUCT_PRICELIST_SYNC	Outbound	Async	See <i>PeopleSoft Enterprise Order Management 9.1 PeopleBook</i> , "Using Sales Order and Quotation Enterprise Integration Points."

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Order Management	Sales Order	SALES_ORDER_LOAD	Inbound	Async	See <i>PeopleSoft Enterprise Order Management 9.1 PeopleBook</i> , "Using Sales Order and Quotation Enterprise Integration Points."
PeopleSoft Order Management	Sales Order/Quote Status	SALES_ORDER_STATUS	Outbound	Async	See <i>PeopleSoft Enterprise Order Management 9.1 PeopleBook</i> , "Using Sales Order and Quotation Enterprise Integration Points."
PeopleSoft Order Management	Sales Order Acknowledgement	SALES_ORDER_ACKNOWLEDGEMENT	Outbound	Async	See <i>PeopleSoft Enterprise Order Management 9.1 PeopleBook</i> , "Using Sales Order and Quotation Enterprise Integration Points."
PeopleSoft Order Management	Sales Order Change	SALES_CRM_ORDER_CHANGE_LOAD	Inbound	Async	See <i>PeopleSoft Enterprise Order Management 9.1 PeopleBook</i> , "Using Sales Order and Quotation Enterprise Integration Points."

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Order Management	Sales Order Change	SALES_ORDER_CHANGE_LOAD	Inbound	Async	See <i>PeopleSoft Enterprise Order Management 9.1 PeopleBook</i> , "Using Sales Order and Quotation Enterprise Integration Points."
PeopleSoft Order Management	Sales Order Load	SALES_CRM_ORDER_LOAD	Inbound	Async	See <i>PeopleSoft Enterprise Order Management 9.1 PeopleBook</i> , "Using Sales Order and Quotation Enterprise Integration Points."
PeopleSoft Order Management	Sales Order Notice	SALES_ORDER_CHANGE_NOTICE	Outbound	Async	See <i>PeopleSoft Enterprise Order Management 9.1 PeopleBook</i> , "Using Sales Order and Quotation Enterprise Integration Points."
PeopleSoft Order Management	Sales Quote	SALES_QUOTE_LOAD	Inbound	Async	See <i>PeopleSoft Enterprise Order Management 9.1 PeopleBook</i> , "Using Sales Order and Quotation Enterprise Integration Points."

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Order Management	Sales Quote Load	SALES_CRM_QUOTE_LOAD	Inbound	Async	See <i>PeopleSoft Enterprise Order Management 9.1 PeopleBook</i> , "Using Sales Order and Quotation Enterprise Integration Points."
PeopleSoft Order Management	Sales Quote Notice	SALES_QUOTE_NOTICE	Outbound	Async	See <i>PeopleSoft Enterprise Order Management 9.1 PeopleBook</i> , "Using Sales Order and Quotation Enterprise Integration Points."
PeopleSoft Order Management	Standard Note	STD_NOTE_FULLSYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Maintaining Additional Customer Information," Setting Up Standard Notes.
PeopleSoft Order Management	Standard Note	STD_NOTE_FULLSYNC_EFF	Outbound	Async	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Maintaining Additional Customer Information," Setting Up Standard Notes.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Order Management	Standard Note	STD_NOTE_SYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Maintaining Additional Customer Information," Setting Up Standard Notes.
PeopleSoft Order Management	Standard Note	STD_NOTE_SYNC_EFF	Outbound	Async	See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i> , "Maintaining Additional Customer Information," Setting Up Standard Notes.
PeopleSoft Order Management	X.12 EDI Sales Order	EDI_TXN_850	Inbound	Async	See <i>PeopleSoft Enterprise Order Management 9.1 PeopleBook</i> , "Using Sales Order and Quotation Enterprise Integration Points."
PeopleSoft Order Management	X.12 EDI Sales Order Acknowledgement	EDI_TXN_855	Outbound	Async	See <i>PeopleSoft Enterprise Order Management 9.1 PeopleBook</i> , "Using Sales Order and Quotation Enterprise Integration Points."

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Order Management	X.12 EDI Sales Quote	EDI_TXN_840	Inbound	Async	See <i>PeopleSoft Enterprise Order Management 9.1 PeopleBook</i> , "Using Sales Order and Quotation Enterprise Integration Points."
PeopleSoft Order Management	X.12 EDI Sales Quote Acknowledgem ent	EDI_TXN_845	Outbou nd	Async	See <i>PeopleSoft Enterprise Order Management 9.1 PeopleBook</i> , "Using Sales Order and Quotation Enterprise Integration Points."
PeopleSoft Product Configurator	Product Configurator Data Sync	CP_CONSTANT_FULLSYNC	Inbound and Outbou nd	Async	See <i>PeopleSoft Enterprise Product Configurator 9.1 PeopleBook</i> , "Synchronizing PeopleSoft Product Configuration Data."
PeopleSoft Product Configurator	Product Configurator Data Sync	CP_CONSTRAINT_FULLSYNC	Inbound and Outbou nd	Async	See <i>PeopleSoft Enterprise Product Configurator 9.1 PeopleBook</i> , "Synchronizing PeopleSoft Product Configuration Data."

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Product Configurator	Product Configurator Data Sync	CP_EXPRESSION_FULLSYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Product Configurator 9.1 PeopleBook</i> , 'Synchronizing PeopleSoft Product Configuration Data.'
PeopleSoft Product Configurator	Product Configurator Data Sync	CP_GLOBAL_FULLSYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Product Configurator 9.1 PeopleBook</i> , 'Synchronizing PeopleSoft Product Configuration Data.'
PeopleSoft Product Configurator	Product Configurator Data Sync	CP_INTRN_VAR_FULLSYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Product Configurator 9.1 PeopleBook</i> , 'Synchronizing PeopleSoft Product Configuration Data.'
PeopleSoft Product Configurator	Product Configurator Data Sync	CP_MATRIX_FULLSYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Product Configurator 9.1 PeopleBook</i> , 'Synchronizing PeopleSoft Product Configuration Data.'

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Product Configurator	Product Configurator Data Sync	CP_MESSAGE_FULLSYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Product Configurator 9.1 PeopleBook</i> , 'Synchronizing PeopleSoft Product Configuration Data.'
PeopleSoft Product Configurator	Product Configurator Data Sync	CP_MULTOP_FULLSYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Product Configurator 9.1 PeopleBook</i> , 'Synchronizing PeopleSoft Product Configuration Data.'
PeopleSoft Product Configurator	Product Configurator Data Sync	CP_OPTION_FULLSYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Product Configurator 9.1 PeopleBook</i> , 'Synchronizing PeopleSoft Product Configuration Data.'
PeopleSoft Product Configurator	Product Configurator Data Sync	CP_PRINTCD_FULLSYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Product Configurator 9.1 PeopleBook</i> , 'Synchronizing PeopleSoft Product Configuration Data.'

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Product Configurator	Product Configurator Data Sync	CP_RULE_FULLSYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Product Configurator 9.1 PeopleBook</i> , "Synchronizing PeopleSoft Product Configuration Data."
PeopleSoft Product Configurator	Product Configurator Data Sync	CP_SECONDARY_FULLSYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Product Configurator 9.1 PeopleBook</i> , "Synchronizing PeopleSoft Product Configuration Data."
PeopleSoft Product Configurator	Product Configurator Data Sync	CP_TEMPLATE_FULLSYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Product Configurator 9.1 PeopleBook</i> , "Synchronizing PeopleSoft Product Configuration Data."
PeopleSoft Product Configurator	Product Configurator Data Sync	CP_TREE_FULLSYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Product Configurator 9.1 PeopleBook</i> , "Synchronizing PeopleSoft Product Configuration Data."

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Product Configurator	Product Configurator Data Sync	CP_VALUE_LIST_FULLSYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Product Configurator 9.1 PeopleBook</i> , "Synchronizing PeopleSoft Product Configuration Data."
PeopleSoft Purchasing	Advanced Shipping Receipt	ADVANCED_SHIPPING_RECEIPT	Inbound	Async	See <i>PeopleSoft Enterprise Purchasing 9.1 PeopleBook</i> , "Receiving Shipments."
PeopleSoft Purchasing	GPO Item Load	ITEM_MFG_GPO_LOAD	Inbound	Async	See <i>PeopleSoft Enterprise Purchasing 9.1 PeopleBook</i> , "Using Group Purchasing Organizations," Loading GPO Data Using PeopleSoft Integration Broker.
PeopleSoft Purchasing	CRM integration of IT Assets	MANUFACTURER_FULLSYNC	Outbound	Async	See <i>PeopleSoft Enterprise CRM 9 Product and Item Management PeopleBook</i>
PeopleSoft Purchasing	Procurement Cards	PROCUREMENT_CARD_LOAD	Inbound	Async	See <i>PeopleSoft Enterprise Purchasing 9.1 PeopleBook</i> , "Managing Procurement Cards."

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Purchasing	Purchase Order Acknowledgement, PO Change Acknowledgement	PURCHASE_ORDER_ACKNOWLEDGEMENT	Inbound	Async	See <i>PeopleSoft Enterprise Purchasing 9.1 PeopleBook</i> , "Creating Purchase Order Change Orders."
PeopleSoft Purchasing	Purchase Order Dispatch	PURCHASE_ORDER_DISPATCH	Outbound	Async	See <i>PeopleSoft Enterprise Purchasing 9.1 PeopleBook</i> , "Dispatching and Printing Purchase Orders."
PeopleSoft Purchasing	Purchase Order Approval Email	PO_EMAIL_PO_APPROVAL	Outbound	Async	See <i>PeopleSoft Enterprise Purchasing 9.1 PeopleBook</i> , "Using Workflow," Setting Up Email Approvals for PeopleSoft Purchasing.
PeopleSoft Purchasing	Purchase Order Expected Receipt	PO_EXPECTED_RECEIPT_BUS_UNIT	Outbound	Async	See <i>PeopleSoft Enterprise Purchasing 9.1 PeopleBook</i> , "Receiving Shipments."
PeopleSoft Purchasing	Purchase Order Expected Receipt	PO_EXPECTED_RECEIPT_SHIPTO	Outbound	Async	See <i>PeopleSoft Enterprise Purchasing 9.1 PeopleBook</i> , "Receiving Shipments."

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Purchasing	Purchase Order Receipt	PO_RECEIPT_NOTIFICATION	Outbound	Aysnc	See <i>PeopleSoft Enterprise Purchasing 9.1 PeopleBook</i> , "Receiving Shipments." See Chapter 6, "Integrating With a Third-Party Point-of-Use Supplier System," page 129.
PeopleSoft Purchasing	Purchase Order Receipt	PURCHASE_ORDER_RECEIPT	Inbound	Async	See <i>PeopleSoft Enterprise Purchasing 9.1 PeopleBook</i> , "Receiving Shipments."
PeopleSoft Purchasing	Purchase Order Requisition	PURCHASE_REQUISITION_LOAD	Inbound	Async	See <i>PeopleSoft Enterprise Purchasing 9.1 PeopleBook</i> , "Using the Requisition Loader." See Chapter 6, "Integrating With a Third-Party Point-of-Use Supplier System," page 129. See Chapter 7, "Integrating With a Third-Party Surgical Resource Software Application," page 139.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Purchasing	Purchase Order Requisition	PURCHASE_REQUISITION_LOAD_C RM	Inbound	Async	See <i>PeopleSoft Enterprise Purchasing 9.1 PeopleBook</i> , "Using the Requisition Loader."
PeopleSoft Purchasing	Request for Quote	PO_REQUEST_FOR_QUOTE	Outbou nd	Async	See <i>PeopleSoft Enterprise Purchasing 9.1 PeopleBook</i> , "Managing Requests for Quotes."
PeopleSoft Purchasing	Request for Quote	PO_REQUEST_FOR_QUOTE_RESPO NSE	Inbound	Async	See <i>PeopleSoft Enterprise Purchasing 9.1 PeopleBook</i> , "Managing Requests for Quotes."
PeopleSoft Purchasing	Return to Vendor	RETURN_TO_VENDOR	Outbou nd	Async	See <i>PeopleSoft Enterprise Purchasing 9.1 PeopleBook</i> , "Managing Vendor Returns."
PeopleSoft Quality	Quality Data Submit	QUALITY_DATA_SUBMIT	Inbound	Async	See <i>PeopleSoft Enterprise Quality 9.1 PeopleBook</i> , "Integrating With Third- Party Applications."

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Services Procurement	Establishment and Location Full Sync (SCM to HCM)	ESTAB_LOC_US_FULLSYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Services Procurement 9.1 PeopleBook</i> , "PeopleSoft Human Capital Management Integration," Setting Up Human Capital Management and Services Procurement Person Integration.
PeopleSoft Services Procurement	US Establishment and Location Sync Message (SCM to HCM)	ESTAB_LOC_US_SYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Services Procurement 9.1 PeopleBook</i> , "PeopleSoft Human Capital Management Integration," Setting Up Human Capital Management and Services Procurement Person Integration.
PeopleSoft Services Procurement	Establishment FullSync Message (SCM to HCM)	ESTAB_TBL_FULLSYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Services Procurement 9.1 PeopleBook</i> , "PeopleSoft Human Capital Management Integration," Setting Up Human Capital Management and Services Procurement Person Integration.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Services Procurement	Establishment Table Sync Message (SCM to HCM)	ESTAB_TBL_SYNC	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Services Procurement 9.1 PeopleBook</i> , "PeopleSoft Human Capital Management Integration," Setting Up Human Capital Management and Services Procurement Person Integration.
PeopleSoft Services Procurement	Add Job (from HCM to SCM)	HCR_ADD_JOB	Outbound	Async	See <i>PeopleSoft Enterprise Services Procurement 9.1 PeopleBook</i> , "PeopleSoft Human Capital Management Integration," Setting Up Human Capital Management and Services Procurement Person Integration.
PeopleSoft Services Procurement	Add Job (from SCM to HCM)	HCR_ADD_JOB_ACK	Inbound	Async	See <i>PeopleSoft Enterprise Services Procurement 9.1 PeopleBook</i> , "PeopleSoft Human Capital Management Integration," Setting Up Human Capital Management and Services Procurement Person Integration.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Services Procurement	Add Person (from SCM to HCM)	HCR_ADD_PERSON	Outbound	Async	See <i>PeopleSoft Enterprise Services Procurement 9.1 PeopleBook</i> , "PeopleSoft Human Capital Management Integration," Setting Up Human Capital Management and Services Procurement Person Integration.
PeopleSoft Services Procurement	Add Job (from HCM to SCM)	HCR_ADD_PERSON_ACK	Inbound	Async	See <i>PeopleSoft Enterprise Services Procurement 9.1 PeopleBook</i> , "PeopleSoft Human Capital Management Integration," Setting Up Human Capital Management and Services Procurement Person Integration.
PeopleSoft Services Procurement	Add User Profile	HCR_ADD_USER_PROFILE	Outbound	Async	See <i>PeopleSoft Enterprise Services Procurement 9.1 PeopleBook</i> , "PeopleSoft Human Capital Management Integration," Setting Up Service Operations - Incremental Synchronization.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Services Procurement	Add User Profile Acknowledgem ent	HCR_ADD_USER_PROFILE_ACK	Inbound	Async	See <i>PeopleSoft Enterprise Services Procurement 9.1 PeopleBook</i> , "PeopleSoft Human Capital Management Integration," Setting Up Service Operations - Incremental Synchronization.
PeopleSoft Services Procurement	Add Job Canceled (from HCM to SCM)	HCR_CAN_JOB	Outbound	Async	See <i>PeopleSoft Enterprise Services Procurement 9.1 PeopleBook</i> , "PeopleSoft Human Capital Management Integration," Setting Up Human Capital Management and Services Procurement Person Integration.
PeopleSoft Services Procurement	Labor Agreement Full Sync Message	HR_LABOR_AGRMNT_FULLSYNC	Inbound	Async	See <i>PeopleSoft Enterprise Services Procurement 9.1 PeopleBook</i> , "PeopleSoft Human Capital Management Integration," Setting Up Human Capital Management and Services Procurement Person Integration.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Services Procurement	Labor Agreement (from HCM to SCM)	HR_LABOR_AGRMNT_SYNC	Inbound	Async	See <i>PeopleSoft Enterprise Services Procurement 9.1 PeopleBook</i> , "PeopleSoft Human Capital Management Integration," Setting Up Human Capital Management and Services Procurement Person Integration.
PeopleSoft Services Procurement	Candidate Req	SAC_CANDIDATE_REQ SAC_CANDIDATE_RESP	Outbound	Sync	See <i>PeopleSoft Enterprise Services Procurement 9.1 PeopleBook</i> , "PeopleSoft Human Capital Management Integration," Setting Up Human Capital Management and Services Procurement Person Integration.
PeopleSoft Services Procurement	Job Posting	SAC_JOB_POST SAC_JOB_RESP	Inbound	Sync	See <i>PeopleSoft Enterprise Services Procurement 9.1 PeopleBook</i> , "PeopleSoft Human Capital Management Integration," Setting Up Human Capital Management and Services Procurement Person Integration.

PeopleSoft SCM Product	EIP	Object Name	Path	Type	Reference
PeopleSoft Services Procurement	Job Unposted	SAC_JOB_UNPOST SAC_JOB_RESP	Inbound	Sync	See <i>PeopleSoft Enterprise Services Procurement 9.1 PeopleBook</i> , "PeopleSoft Human Capital Management Integration," Setting Up Human Capital Management and Services Procurement Person Integration.
PeopleSoft Supplier Contract Management	Contract Activity Update	CS_ACTIVITY_CNTRCT	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Supplier Contract Management 9.1 PeopleBook</i> , "Syndicating Supplier Contracts and Contract Messaging," Contract Syndication Enterprise Integration Points.
PeopleSoft Supplier Contract Management	Contract Syndication	CS PROCUREMENT_CNTRCT	Inbound and Outbound	Async	See <i>PeopleSoft Enterprise Supplier Contract Management 9.1 PeopleBook</i> , "Syndicating Supplier Contracts and Contract Messaging," Contract Syndication Enterprise Integration Points.

<i>PeopleSoft SCM Product</i>	<i>EIP</i>	<i>Object Name</i>	<i>Path</i>	<i>Type</i>	<i>Reference</i>
Common	EWN Notify Message	SAC_EWN_NOTIFY_MSG	Outbound	Async	See <i>PeopleSoft Events and Warnings PeopleBook</i>

For technical details about an individual EIP, use the Interactive Services Repository (ISR) in the My Oracle Support website located at <https://support.oracle.com/CSP/ui/flash.html>.

See Also

Enterprise PeopleTools 8.50 PeopleBook: PeopleCode API Reference

Chapter 3

Implementing Integrations

This chapter discusses implementing integrations.

- Setting up service operations
- Setting up chunking
- Setting up electronic data collections
- Setting up BackBone Interlinks
- Setting up XML Mapper

Setting Up Service Operations

PeopleSoft is delivered with many enterprise integration points (EIPs) to send and receive data with a third-party system or another PeopleSoft application, such as CRM. These EIPs are implemented using service operations within PeopleSoft Integration Broker. The instructions in this section describe the steps necessary to enable service operations.

See [Appendix A, "Scenarios for Integration With PeopleSoft Supply Chain Management,"](#) page 347.

Note. Your database administrator will need to assist you with this setup.

Understanding Inbound EIPs

PeopleSoft Integration Broker can receive data from a third-party system or another PeopleSoft system, such as CRM. The inbound data can have the following data formats:

- An XML file that uses the PeopleSoft format.

This XML file could be generated by another PeopleSoft system, generated by a third-party system in this PeopleSoft XML format, or generated by a third-party system and then converted to the PeopleSoft XML format by a middleware product. Once received by your PeopleSoft system, the inbound data is placed in the message queue, checked for errors and then moved to the inbound staging tables to be processed by the individual PeopleSoft application.

- A flat file that uses the PeopleSoft format.

This file could be generated by a third-party system in this PeopleSoft format or generated by a third-party system and then converted to the PeopleSoft format by a middleware product. A flat file could also come from another PeopleSoft system. The PeopleSoft Integration Broker uses transforms to convert the data from a flat file to an XML file also using the PeopleSoft format. The inbound data is then placed in the message queue, checked for errors, and then moved to the inbound staging tables to be processed by the individual PeopleSoft application.

- A flat file using an EDI X.12 format.

This file could be generated by a third-party system in this EDI X.12 flat file format or generated by a third-party system and then converted to the EDI X.12 flat file format by a middleware product. An EDI flat file could also come from another PeopleSoft system. Once received by your PeopleSoft system, the PeopleSoft Integration Broker uses transforms to convert the data from a flat file to an XML file and then from EDI X.12 format to the PeopleSoft format. The inbound PeopleSoft-formatted XML data is then placed in the message queue, checked for errors, and then moved to the inbound staging tables to be processed by the individual PeopleSoft application.

- An XML file using an EDI X.12 format.

This file could be generated by a third-party system in this EDI X.12 XML format or generated by a third-party system and then converted to the EDI X.12 XML format by a middleware product. An EDI XML file could also come from another PeopleSoft system. Once received by your PeopleSoft system, the PeopleSoft Integration Broker uses transforms to convert the data from EDI X.12 format to the PeopleSoft format. The inbound PeopleSoft-formatted XML data is then placed in the message queue, checked for errors, and then moved to the inbound staging tables to be processed by the individual PeopleSoft application.

Note. Standard X.12 transaction definitions are predefined in PeopleSoft along with examples of transformation rules for selected X.12 transactions. Individual trading partner specifications will vary so customizations are required for each transaction or trading partner variation.

Understanding Outbound EIPs

PeopleSoft Integration Broker can send data to a third-party system or another PeopleSoft system, such as CRM using the following data formats:

- An XML file that uses the PeopleSoft format.

PeopleSoft can generate a PeopleSoft-formatted XML file to be received by another PeopleSoft system, such as CRM, or a third-party system with or without conversion by a middleware product.

- A flat file that uses the PeopleSoft format.

PeopleSoft can generate a PeopleSoft-formatted XML file that is converted, by PeopleSoft Integration Broker, into a PeopleSoft-formatted flat file. This flat file can be received by a third-party system or processed by a middleware product and then received by a third-party system.

- A flat file using an EDI X.12 format.

PeopleSoft can generate a PeopleSoft-formatted XML file that is converted, by PeopleSoft Integration Broker, using two transforms (Application Engine programs). The data is first converted into the EDI X.12 format and then from XML to flat file format.

- An XML file using an EDI X.12 format.

You do not have to use a flat file for EDI formatted data. As delivered, the PeopleSoft Integration Broker converts the PeopleSoft-formatted XML data into a EDI X.12 formatted flat file using transform programs; first by converting to an EDI XML format and then to a flat file format. However, you can change the system to output EDI X.12 data in an XML format by removing the second transform program.

Note. Standard X.12 transaction definitions are predefined in PeopleSoft along with examples of transformation rules for selected X.12 transactions. Individual trading partner specifications will vary so customizations are required for each transaction or trading partner variation.

Setup Within PeopleSoft Integration Broker

To activate a service operation, complete the following steps in PeopleSoft Integration Broker:

1. Activate the service operation.

On the General tab of the Service Operations component, select the Active check box for the applicable service operation version. If the desired version is not the default version for the service operation, the default version must also be activated.

2. For asynchronous service operations only, verify the queue is running.

On the General tab of the Service Operations component, select the View Queue link at the bottom of the page. On the Queue Definitions page, verify the Queue Status field has a value of *Run*.

3. Activate the service operation handlers.

Note. This step does not apply to all service operations.

On the Handlers tab of the Service Operations component, select the value of *Active* in the Status field for all needed handlers.

- For inbound asynchronous service operations, activate the OnNotify handler.
- For inbound synchronous service operations, activate the OnRequest handler.
- If you are using chunking on an outbound service operation, activate the OnRoute handler.

4. Activate the service operation routings.

On the Routings tab of the Service Operations component, activate a routing definition for each node that will send or receive data. To activate a routing, select the check box next to the routing definition and click the Activate Selected Routings button.

- Activate an inbound routing to receive data into PeopleSoft SCM.
- Activate an outbound routing for sending data to a third-party system or another PeopleSoft product, such as CRM.
- Activate a local routing for sending data using an effective-dated outbound service operation.
- Activate a local routing to receive inbound flat files.
- You must activate at least one routing if the data is being sent in an XML format.
- You can skip this step if a batch publish rule is set up to post to a flat file only.

5. Verify the routing definition parameters.

On the Routings tab of the Service Operations component, select the link attached to the routing definition name. This link accesses the Routing Definitions component. Select the Parameters tab and complete the following steps:

- Confirm the external alias name in the External Alias field for the routing is correct. When sending or receiving data, the Integration Broker determines which routing to use by referring to the external alias name, not the routing name.
- Add or verify the transform programs on this routing definition. A routing definition defines the sending and receiving nodes for a transaction and specifies any inbound and outbound transformations to invoke. A transform program is a type of PeopleSoft Application Engine program that can convert data from one format to another; for example, from XML to a flat file. Use a transform program when one node sends a request or response message with a data structure different from the structure required by the other node. Many pre-defined routings are delivered with transform programs. You must decide, based on your unique situation, to change, remove, and add transform programs. For example, some delivered transform programs convert data to the EDI format, if you are not using EDI then you will want to use a different routing definition or remove that transform program from the routing definition.

6. Verify the node from the routing is active.

Go to the Node Definitions page and verify the Active Node check box has been selected for any sender or receiver nodes used in the routings that you activated on your Service Operations-Routings page.

7. For an outbound service operation, verify the node or routing is connected to the correct network.

8. For inbound service operations using a flat file, define the inbound file rule and run control parameters:

- For X.12 formatted EDI files, use the Inbound File Loader Rules page and the Inbound File Processing run control under the Integration Broker menu.
- For PeopleSoft formatted files, use the File Inbound page and the Inbound File run control under the Enterprise Components menu.

Setup Within PeopleSoft Enterprise Components

To activate chunking, inbound file rules, batch publish rules, or full publish rules for a service operation, complete the following steps in PeopleSoft Enterprise Components:

- Setup the publish utility.

If the outbound EIP is sending (publishing) data using the publish utility, setup full or batch data publishing.

The full publish utility automates the process of copying the contents of an entire table into another database or third-party system. You can use the utility to synchronize data between systems. The publishing rules include pages for full table publishing rules, batch publishing rules, record mapping, languages, and batch programs.

Setup for full or batch data publishing using the Full Data Publish Rules component or the Batch Publish Rules component. On both of these components, the Message Name field is the service operation. Complete the following tasks:

1. Activate the rule by selecting the value of *Active* for the Status field.
2. Specify the desired output (XML-based message or flat file).
3. If you want to use chunking select a Chunking Rule ID. The outbound data will be sent to the nodes specified by the chunking rule.

If you have more than one publish rule defined for a service operation, you should activate a rule for each batch program. For example, item status change, Item Revisions, and Item Loader each have unique rules for the ITEM_SYNC service operation, so three rules must be activated for ITEM_SYNC.

- For outbound asynchronous service operations using chunking, activate and configure the appropriate chunk rule mapping definitions. For instance, use the BusUnit Mapping component (EO_CHUNKBU) to configure the BUSINESS_UNIT chunk rule.

See [Chapter 3, "Implementing Integrations," Setting Up Chunking, page 75](#).

- Setup the inbound file rules in order to used the inbound file publish utility.

When external systems send flat files, use the inbound file publish utility to translate the incoming data into transactions that are acceptable to your PeopleSoft system. Use the Inbound File Rules page to define the file, file layout, service operation, and other parameters to accept the inbound file.

See Also

[Chapter 3, "Implementing Integrations," Setting Up Chunking, page 75](#)

Enterprise PeopleTools 8.50 PeopleBook: Integration Broker

Pages Used to Set Up Service Operations

<i>Page Name</i>	<i>Definition Name</i>	<i>Navigation</i>	<i>Usage</i>
Service Operations-General	IB_SERVICE	PeopleTools, Integration Broker, Integration Setup, Service Operations, General	Define and activate a service operation.
Service Operations-Handlers	IB_SERVICEHDLR	PeopleTools, Integration Broker, Integration Setup, Service Operations, Handlers	Activate one or more service operation handlers.
Service Operations-Routings	IB_SERVICERTNGS	PeopleTools, Integration Broker, Integration Setup, Service Operations, Routings	Define and activate routing definitions on the service operation.
Queue Definitions	IB_QUEUEDEFN	- PeopleTools, Integration Broker, Integration Setup, Service Operations, General. Select the Queue link attached to this service operation. - PeopleTools, Integration Broker, Integration Setup, Queues	Activate the queue used by the service operation.
Routings-Parameters	IB_ROUTINGDEFNDOC	- PeopleTools, Integration Broker, Integration Setup, Service Operations, Routings. Select the Details link attached to the routing. - PeopleTools, Integration Broker, Integration Setup, Routings, Parameters	Verify the external service alias names used by this routing.
Node Definitions	IB_NODE	PeopleTools, Integration Broker, Integration Setup, Nodes, Node Definitions	Activate node used by the service operation.
Nodes-Connectors	IB_NODECONN	PeopleTools, Integration Broker, Integration Setup, Nodes, Connectors	For an outbound service operation, verify the node is connected to the correct network.

Page Name	Definition Name	Navigation	Usage
Full Data Publish Rules	EO_MSGPUBFULL	Enterprise Components, Integration Definitions, Full Data Publish Rules	Activate the full data publish rule for the service operations using the full data publish rules.
Batch Publish Rules	EO_MSGPUBATCH	Enterprise Components, Integration Definitions, Batch Publish Rules	Activate the batch publish rule for the service operations using the batch publish utility.
File Inbound	EO_FILE_INBOUND	Enterprise Components, Integration Definitions, Inbound File Rule	Define the parameters to receive inbound flat files from third-party systems.

See Also

Enterprise PeopleTools 8.50 PeopleBook: Integration Broker

Setting Up Chunking

If you are sending outbound data using a service operation in Integration Broker, you may want to set up chunking. When chunking, the system automatically breaks up the outbound transaction into several smaller transactions based on the values in one or more of the fields in the level zero record of the message. The message identifies the records and fields to be sent and is tied to the service operation. For example, if you want to chunk by the business unit field of the message, the outbound transaction would be broken up by business unit sending each business unit's outbound data to a node that you have defined. Another example would be for sites sending EDI transactions directly to trading partners. If you are sending purchase orders directly to a vendor, make sure that the vendor gets only their information. Chunking provides the ability to split a batch of purchase orders into separate transactions based on the trading partner. The Integration Broker then provides tools to route the transactions to specific nodes based on that trading partner identification, in this case the vendor ID.

See *PeopleSoft Enterprise Electronic Data Interchange 9.1 PeopleBook*, "Understanding Electronic Data Interchange."

Note. If you are using a middleware product to transform and route transactions to trading partners then you most likely will not need to use chunking. The entire outbound transaction would go to the node defined for the middleware product.

Chunking is implemented using the Batch Publish Utility or the Full Data Publish Utility. In either case a batch publish rule is created and a *chunking rule* can be attached. The chunking rule defines a table containing a set of values that map to specific nodes. For example, in the above example where you are chunking by vendor ID, the chunking rule table would contain a set of vendor IDs that map to individual nodes for trading partners receiving the purchase order data.

The following is a step by step explanation of the process flow of an outbound transaction using chunking:

1. Chunking Selection

The run process that generated the transaction. This may be the Full Data Publish Utility or one of the batch based service operations that use the Batch Publish Utility.

Note. All transactions generated from the Publish Outbound Messages process page use the Batch Publish Utility.

When the batch publish or full data publish utilities run they recognize the chunking rule assigned to the publish rule and split the data into separate XML files for each chunking rule value. The XML files are then published to the Integration Broker.

2. Chunking Node Routing

The Integration Broker makes the decision of which node will receive each XML file. Standard processing for the Integration Broker will send the outbound data to all of the nodes that have active outbound routings on the service operation. When chunking is used, the Integration Broker needs to send the outbound transaction only to the nodes specified by the chunk rule. This is done by activating the ROUTERSENDHDLR handler on the Service Operations-Handlers page. This handler is an OnRoute application class containing PeopleCode that directs the Integration Broker to only send the outbound data to the nodes that you have defined for the specific chunking rule.

PeopleSoft provides a number of chunking rules, chunking rule tables, and data entry pages that can be used to maintain node mappings and routing rules for some of the more commonly used field values. The data entry pages are noted in the Pages Used to Set up Chunking table below. Additional setup information is provided in the PeopleSoft Enterprise Components PeopleBook explaining how to create your own customized chunking rule, chunking rule table and data entry pages.

See Also

Enterprise PeopleTools 8.50 PeopleBook: Integration Broker

[Appendix A, "Scenarios for Integration With PeopleSoft Supply Chain Management," page 347](#)

Pages Used to Set Up Chunking

<i>Page Name</i>	<i>Definition Name</i>	<i>Navigation</i>	<i>Usage</i>
Add Nodes to Chunk Rule	EO_ADNODECHUNK_PNL	Enterprise Components, Integration Definition, Map Chunking Rules, Node to ChunkRule, Add Nodes to Chunk Rule	Map nodes by Chunk Rules.
BusUnit Mapping	EO_CHUNKBU	Enterprise Components, Integration Definition, Map Chunking Rules, Business Units, BusUnit Mapping	Maintain ChunkRule business unit mapping.

Page Name	Definition Name	Navigation	Usage
Quick Map	EO_ADDBUNODE_PNL	Enterprise Components, Integration Definition, Map Chunking Rules, BU to ChunkRule/Node, Quick Map	Map business units by ChunkRules or nodes.
Map Business Unit	EO_ADDNODEBU_PNL	Enterprise Components, Integration Definition, Map Chunking Rules, ChunkRule/Node to BU, Map Business Unit	Map ChunkRules or nodes by business unit.
SetId Mapping	EO_CHUNKSETID	Enterprise Components, Integration Definition, Map Chunking Rules, Setids, Setid Mapping	Maintain ChunkRule setID mapping.
Quick Map	EO_ADDSIDNODE_PNL	Enterprise Components, Integration Definition, Map Chunking Rules, Setid to ChunkRule/Node, Quick Map	Map setIDs by ChunkRules or nodes.
Map Set IDs	EO_ADDNODESID_PNL	Enterprise Components, Integration Definition, Map Chunking Rules, ChunkRule/Node to Setid, Map Set IDs	Map ChunkRules by setID.
Customer ID Chunk	OM_CHUNKCUSTID	SCM Integrations, Chunking Rule, CustID to Node Mapping, Customer ID Chunk	Map customer chunk rule and node to customer ID.
BU/Location Node Mapping	IN_CHUNKBULOCATION	SCM Integrations, Chunking Rule, BU/Loc to Node Mapping, BU/Location Node Mapping	Map business units chunk rule and node to location codes.
BU/Par Location Node Mapping	IN_CHUNKBUPARLOC	SCM Integrations, Chunking Rule, BU/Par to Node Mapping, BU/Par Location Node Mapping	Map business unit and par location chunk rule and node to par location ID.
Setup Vendor to Node	PO_CHUNK_VENDOR	SCM Integrations, Chunking Rule, Manage ChunkRule VendorID Map, Setup Vendor to Node	Set up vendor chunk rule and node to vendor ID and vendor location.
PO Chunk Shipto	PO_CHUNK_SHIPTO	SCM Integrations, Chunking Rule, Ship to Loc to Node Mapping, PO Chunk Shipto	Set up ShipTo chunk rule and node to Ship To Location.

<i>Page Name</i>	<i>Definition Name</i>	<i>Navigation</i>	<i>Usage</i>
Source Code Chunk	OM_CHUNK_SRC_CD	SCM Integrations, Chunking Rule, Source Code to Node Mapping, Source Code Chunk	Set up source code chunk rule and node to source codes.

Setting Up Electronic Data Collections

This section discusses setting up electronic data collections.

Page Used to Set Up Electronic Data Collections

<i>Page Name</i>	<i>Definition Name</i>	<i>Navigation</i>	<i>Usage</i>
Data Collection Setup	BCT_SETUP_FS	SCM Integrations, Setup, Data Collection, Data Collection Setup	Set up electronic data collection defaults.

Setting Up Electronic Data Collections Defaults

To enter defaults for inbound transactions, use the Bar Code Transaction Setup component.

Access the Data Collection Setup page (SCM Integrations, Setup, Data Collection, Data Collection Setup).

Transaction Number The last transaction number used in the transaction log appears. The system uses the transaction number to automatically generate a unique number for each transaction added to the transaction log from the transaction pages. System-generated transactions also use this field.

History Options Determines whether a history of the transactions is saved when you run the Purge process (INPYPURG) on the transactions in the transaction log.

Options are:

History for all Transactions: The system maintains a history of all transactions in the transaction log.

History only for Errors: The system maintains a history only for transactions that have errors or warnings.

No history will be maintained: The system doesn't maintain a history for any transactions in the transaction log.

Status of Records to Purge	Determines which records the system purges when you run the Purge process. Options are: <i>Complete</i>: All rows for the transaction are either canceled or successfully processed. <i>Confirmed</i>: Purges only rows set to a confirmed status. This entry should be selected only if you have modified the interacting system to set the status of transactions to confirmed after making sure that the PeopleSoft system has processed the transaction to a complete status.
File Suffix	Used as the suffix for the file name of the label extraction file, when a format ID is not specified on the label generation page.

Note. If your interacting system is selecting *Complete* transactions to mark them as being ready to purge, the BCT_STATUS on BCT_CTL should be updated from 2 (complete) to 6 (confirmed).

See Also

[Chapter 9, "Using an Electronic Data Collection System," Using Electronic Data Collection Transactions, page 159](#)

[Chapter 9, "Using an Electronic Data Collection System," Purging Transactions, page 163](#)

[Chapter 9, "Using an Electronic Data Collection System," Generating Labels, page 163](#)

Setting Up Backbone InterlinX

This section provides an overview and discusses Backbone InterlinX Framework.

Understanding Backbone InterlinX

BackBone InterlinX provide a metadata-driven, generic framework for data synchronization of tables between PeopleSoft databases. This framework enables PeopleSoft data synchronization through a single, metadata-driven EIP, thereby leaving standard EIPs to do their intended purpose of providing integration "services".

The design concepts behind the Backbone InterlinX Framework provide:

- A single, generic, metadata-driven EIP for selecting and/or synchronizing data between PeopleSoft databases of varied releases.
- A private EIP that does not expose any additional unnecessary EIP contracts to the outside world.
- An internal EIP that is not intended for external use and not posted to the ISR for external-use or support.
- The ability to synchronize record level data independent of application business logic.
- The ability to leverage XSL transformations for data model changes between releases.

BackBone InterlinX provides a simple, metadata-driven, Integration Broker-based solution for data synchronization. In addition, BackBone InterlinX provides data query ("Data Pull") capabilities using XML that are not offered with ETL tools.

Prerequisites

The following objects must be activated and configured correctly within the PeopleSoft Integration Broker for the BackBone InterlinX Framework to work:

- Service operation SAC_BBIX_MESSAGE.
- Message SAC_BBIX_MESSAGE.
- Queue SAC_BBIX.
- Service operation routings.
- Service operation handler INBOUND_SAC_BBIX

Pages Used to Set Up Backbone InterlinX

<i>Page Name</i>	<i>Definition Name</i>	<i>Navigation</i>	<i>Usage</i>
Define Target Set	SAC_BBIX_TARGETSET	SCM Integrations, Backbone InterlinX, Define Target Set	Set up target sets, a logical grouping of target databases for data to be synchronized with the Backbone InterlinX framework. You can enter a list of target databases or Integration Broker Nodes for data to be "pushed" to or "pulled" from in order to define your target sets.
Integration Definition	SAC_BBIX_DEFN	SCM Integrations, Backbone InterlinX, Define Integration	Set up integrations, a record or group of records that you wish to synchronize with other PeopleSoft databases within the BackBone InterlinX Framework. You can select the data options for integrating with your target databases.
BBIX User Exit Processing	SAC_BBIX_USER_EXIT	Click the Integration User Exits link on the Integration Definition page	Set up additional processing to be done before and/or after data is synchronized using the BackBone InterlinX Framework.

Setting Up Target Sets

Access the Define Target Sets page (SCM Integrations, Backbone InterlinX, Define Target Set).

Target Set	Enter an identifier for your target set.
Node Name	Enter a PeopleSoft Integration Broker Node with which to synchronize data.
	Note. Add additional rows for each Node that you wish to integrate with for this target set ID.

See Also

Enterprise PeopleTools 8.50 PeopleBook: Integration Broker

Defining Integrations

Access the Integration Definition page (SCM Integrations, Backbone InterlinX, Define Integration).

BackBone InterlinX

Integration Definition

This is the BackBone InterlinX meta-data definition for the "pushing" and "pulling" of data from one PeopleSoft database to another.

Definition

Integration ID: CUSTOMERS

Active: ☒

*Description: Customer Data

Integration User Exits

*Processing: Standard Mode

*Data: Setup Data

*Action: Data Push

Segment Size (rows):

Processing Options

Find | View All | First 1 of 1 Last

*Import Option: Update and Append only

Record: 1099C_CUST_DATA

*Fields: List of Fields

Field(s)

Customize | Find | First 1-2 of 2 Last

*Name

CUST_ID

ADDR_LN4

+...

Filter:

e.g.: WHERE SETID = 'SHARE'

Target Node(s)

Customize | Find | View All | First 1 of 1 Last

	*Target Set ID	Description	Map Set ID	
1				
+...				

Integration Definition

Integration ID Enter an ID for your integration.

Active Click to indicate that the integration is active. If cleared, the integration is inactive. Inactive integrations will not publish data.

Processing

Determines how the integration will be processed. Options include:

Standard Mode: Select to enables the Processing Options group box so that you can execute the integration either from the BBIX Run Control Component or directly from PeopleCode.

PeopleCode Only Mode: Select to disables the Processing Options group box so that you can only execute the integration using PeopleCode.

Data

Determines the type of data that the integration will synchronize. Options include:

Setup Data: Data is synchronized and committed record by record

Transaction Data: Data is synchronized and committed based on a parent-child transaction model. When this option is selected, the first record in the Processing Options group box is used as the parent record, and all additional records are used as child records.

The system synchronizes data one parent row and all of the corresponding children rows at a time. Each parent row and the children rows is considered a logical transaction.

This option is only available with the processing option of *Standard Mode*.

Action

Select to determine whether data is sent to or retrieved from the target sets. Options include:

Data Push – Data is sent to the defined target set(s).

Data Pull – Data is retrieved from the defined target set(s).

This option is only available with the processing option of *Standard Mode*.

Processing Options**Import Option**

Select to determine whether data is deleted from tables before synchronization occurs. Options include:

Update and Append Only: Data is not deleted from the source or target database(s). The data sent is updated if the record already exists or added if the record does not exist in the target for a "Data Push" or in the source for a "Data Pull".

Delete All Record Data: The system deletes data from the source or target database. ALL of the data in the table is deleted in the target for a "Data Push" or in the source for a "Data Pull" before the new data is inserted.

Delete Records using Filter: Data is deleted from the source or target database(s) based on the record "filter" that is defined. The data that matches the "filter" condition in the table is deleted in the target for a "Data Push" or in the source for a "Data Pull" before the new data is inserted.

This option is only available with the processing option of *Standard Mode* and Setup Data.

Record	Select a table to synchronize. Note. For transaction data, the key values on the parent record must exist in all child records. This option is only available with the processing option of <i>Standard Mode</i>.
Fields	Select to determine whether to synchronize all fields on the record or a list of fields. Options include: <i>All Fields:</i> All fields on the record are synchronized. <i>List of Fields:</i> Enables a subset of the fields on the record to be synchronized. When selected, you can create rows and search for each field on the selected record. However, the key fields for a record are always synchronized. Note. If fields are sent in a "Data Push" that do not exist in the target database(s), then these extra fields are ignored. However, if specific fields are selected within a "Data Pull" that do not exist in the target database(s), then data will not be synchronized.
Filter	Create a filter or WHERE clause to subset the data to be synchronized. If not entered, then the entire record is used. This field is not required.
Target Nodes	
Target SetID	Determines the Target Set with which to synchronize the integration. If you don't select at least one Target Set, then the integration will be sent based on the Integration Broker service operation defined for the SAC_BBIX_MESSAGE message.
Map Set ID	Enter the map set ID for which you want to map the integration.

Implementing XML Mapper

This section provides an overview of XML Mapper and discusses how to set it up.

Understanding XML Mapper

XML Mapper enables you to map values between your database and an external trading partner database. For example, if you are integrating to a computer hardware vendor, if you use a field called business unit, and the vendor uses a field called BU, you can set up a mapping relationship where your outbound purchase order XML transaction automatically converts data in business unit fields to BU fields.

Prerequisites to Using XML Mapper

Before you begin using XML Mapper, you must:

- Activate service operations set up in Integration Broker.
- Set up an integration broker relationship including transaction modifiers for the node associations.

See Also

Enterprise PeopleTools 8.50 PeopleBook: Integration Broker

Pages Used to Set Up XML Mapper

Page Name	Definition Name	Navigation	Usage
Define Map	SAC_MAP_DEFN	SCM Integrations, XML Mapper, Define Maps	Use to define the type of transformation and to which message, records, and fields it applies.
Map Detail	SAC_MAP_DEFN_DTL	SCM Integrations, XML Mapper, Define Maps, Map Detail	Use to specify the map type detail.
Define Map Sets	SAC_MAPSETDEFN	SCM Integrations, XML Mapper, Define Map Sets	Use to group maps together, order them, and specify in which directions they apply.
Define Node Associations	SAC_NODE_ASSOC	SCM Integrations, XML Mapper, Define Node Associations	Use to associate a source node and a target node with a map set. All maps in an associated map set will then execute using the node association. Before defining a node association, set up an Integration Broker service operation routings for your nodes. <i>See Enterprise PeopleTools 8.50 PeopleBook: Integration Broker</i>

Defining Maps

Access the Define Maps page (SCM Integrations, XML Mapper, Define Maps).

Define Map

Map Detail

Map ID:

OSN_INBOUND_INV_UOM

☒ Active

*Description:

Unit Of Measure

*Map Type:

Field Value

Map Level:

☒ All Messages

☐ Specific Message

Message:

Map Match Criteria

*Criteria:

Record/Field

☒ All Records

☐ Specific Record

Record:

Field:

Define Maps

Map Type

Select to specify a map type for this map. The value you select determines the options available on the Map Detail page. Options include:

Application Class: maps data using an application class that you specify. Selecting this makes the application class ID and application class path fields available on the Map Detail page. Specify an extension of class `SCM_SAC_XMLMAPPER:Maps:MapBase`, and be certain the specified class implements method `TransformXMLString()`.

Attribute Value: maps the values associated with a specific XML attribute. Selecting this makes the internal value and external value fields available on the Map Detail page.

Field Alias: enables the renaming of fields, such as renaming a field called *business unit* to *BU*. Selecting this makes the internal field name and external field name fields available on the Map Detail page.

Field Value: enables the revaluing of fields. For example, externally, a business unit could be called *NY Operations*, internally, it could be called *US007*. Selecting this makes the internal value and external value fields available on the Map Detail page.

Field Value — SQL: maps field values using a SQL object. The SQL objects should return two values: internal value and external value, in that order. Selecting this makes the SQL object identifier field available on the Map Detail page.

Record Alias: enables the renaming of records. Selecting this makes the internal record and external record fields available on the Map Detail page.

Values Only: sets up a simple list of mapped values that you can use from code. Selecting this makes the internal value and external value fields available on the Map Detail page.

Note. This map type is never run automatically.

XSL: maps data using XSL that you provide. Selecting this makes the XSL field available on the Map Detail page.

See [Chapter 3, "Implementing Integrations," Defining Map Set Detail, page 88](#).

Map Level

Select All Messages to apply this map to all active messages, or Specific Message to apply this map to one message only.

This option is only available if you select a map type of application class, attribute value, field alias, field value, record alias, or XSL.

Message

Enter the specific message to map to if you selected the specific message mapping level.

Map Match Criteria**Attribute Name**

Enter a name for the attribute. The system displays this field only when you have selected an attribute value map type.

Criteria	Enter criteria used to map the data. This is only available if you have selected a field alias, field value, field value — SQL map type. Options include: <i>None</i>: no criteria will be used to map the data other than that found on the Map Detail page. Note. This value is for system use only. You must select a value other than <i>None</i>. <i>Record/Field</i>: to map data by a specified record or field. You can choose All Records, Specific Record, and select a Record, or select a <i>Field</i>. <i>XPath</i>: select to enter an XPath expression that will specify everything BUT the values you would like to map. Additional XPath text will be appended to your XPath based on the values specified on the Map Details page. For example, if A and B are specified as Internal and External values, respectively, the XPath expression <code>//RECORD_NAME/FIELDNAME</code> would become <code>//RECORD_NAME/FIELDNAME/text()[.='A']</code> for an outbound transaction. If you select this option, enter a <i>Pattern</i>.
-----------------	---

Defining Map Set Detail

Access the Map Detail page (SCM Integrations, XML Mapper, Define Maps, Map Detail).

Application Class Path	Specify an extension of class <code>SCM_SAC_XMLMAPPER:Maps:MapBase</code> . Be certain the specified class implements method <code>TransformXMLString()</code> . The system displays this field only when you have selected an application class map type on the Define Map page.
Application Class ID	Select a valid application class ID that is available at the specified application class path. The system displays this field only when you have selected an application class map type on the Define Map page.
Internal Value	Enter the value you wish to convert to on an inbound transaction or convert from on an outbound transaction. The system displays this field only when you have selected an attribute value, field value, or values only map type on the Define Map page.
External Value	Enter the value you wish to convert from on an inbound transaction or convert to on an outbound transaction. The system displays this field only when you have selected an attribute value, field value, or values only map type on the Define Map page.
Internal Field Name	Enter the value you wish to convert to an inbound field name or from an outbound field name. The system displays this field only when you have selected a field alias map type on the Define Map page.
External Field Name	Enter the value you wish to convert from an inbound field name or to an outbound field name. The system displays this field only when you have selected a field alias map type on the Define Map page.

- SQL Object Identifier

Select a SQL Object Identifier. The system displays this field only when you have selected a field value — SQL map type on the Define Map page.
- Internal Record Name

Enter the value you wish to convert to on an inbound record or convert from on an outbound record. The system displays this field only when you have selected a record alias map type on the Define Map page.
- External Record Name

Enter the value you wish to convert from an inbound record name or to an outbound record name. The system displays this field only when you have selected a record alias map type on the Define Map page.
- XSL

Enter your own custom XSL transformation. The system displays this field only when you have selected a map type of XSL on the Define Map page.

Defining Map Sets

Access the Define Map Sets page (SCM Integrations, XML Mapper, Define Map Sets).

Define Map Set

Map Set ID: ITEMS

☒ Active

*Description: Items

Maps

Customize | Find | View All | First 1-2 of 2 Last

	*Map ID	Description	Type	*Direction	Move Up	Move Down	
1	OSN_INBOUND_INV_	Unit Of Measure	Field Value	Both			
2				Both			

Define Map Sets page

- Map Set ID

Create a map set ID to designate each map set.
- Active

This option must be selected for the XML mapper to complete data transformations.
- Map ID

Select a Map ID to associate with this map set. You can associate multiple map IDs with a single map set.
- Direction

Enter the direction for which the selected map should apply. Options include *Inbound* for inbound transactions, *Outbound* for outbound transactions, or *Both* if you want the map set to be used for inbound and outbound transactions.
- Arrows

Choose the order in which the maps should be run.

Defining Node Associations

Access the Define Node Associations page (SCM Integrations, XML Mapper, Define Node Associations).

Define Node Associations

Source Node:

PSFT_ORACLE_SUPPLIER_NETWORK

Oracle Supplier Network

Target Node:

PSFT_SUPPLIER_NETWORK

Supplier Network

Map Sets

Customize

Find

1

First

1 of 1

Last

	Map Set ID	Description
1		

+

Define Node Associations page

- Map Set ID

Enter a map set ID to use with the source node and target node.
- Arrows

Choose the order in which the map sets should be run.

Chapter 4

Processing Enterprise Integration Points (EIPs)

This chapter discusses how to:

- Process Inbound EIPs.
- Process Outbound EIPs.
- Process Backbone Interlinks.

Processing Inbound EIPs

This section discusses how to:

- Use transaction maintenance.
- Use data definition maintenance.
- Purge transactions.

Pages Used to Process Inbound EIPs

<i>Page Name</i>	<i>Definition Name</i>	<i>Navigation</i>	<i>Usage</i>
Transaction Maintenance	BCT_CTL_UPD	SCM Integrations, Transaction Error Handling, Maintain Transactions, Transaction Maintenance	View all electronic transactions in the transaction log and access the detail pages that enable you to correct transaction errors.
Data Def Maint	EO_EIP_CTL_MAINT	SCM Integrations, Transaction Error Handling, Maintain Data Definitions, Data Def Maint	View data detail or correct errors for inbound EIPs that contain data rather than transactions.

Page Name	Definition Name	Navigation	Usage
Purge	BCT_INV_REQPURG	SCM Integrations, Process Transactions, Purge, Transactional Data, Purge	Initiate the Purge Application Engine process (IN_BCT_PURGE) that purges transactions for EIPs.

Using Transaction Maintenance

Access the Transaction Maintenance page (SCM Integrations, Transaction Error Handling, Maintain Transactions, Transaction Maintenance).

Transaction Maintenance

*Unit: US010 Transaction: Status: Search

Transaction Details Customize Find View All First 8-14 of 14 Last

EIP Control ID	Trans Code	Description	*Status	Error	Date/Time	User	From
12963347270119320000000001	0360	Create Stock Request	Complete	0	08/05/2009 3:34PM	DVP1	Message
30000000000001290000000001	0365	Request to Ship (front-end)	New	0	06/03/2005 6:24PM	SAMPLE	Page
30000000000001280000000001	0361	Request to Reserve	New	0	06/03/2005 6:15PM	SAMPLE	Page
30000000000001270000000001	0361	Request to Reserve	New	0	06/03/2005 6:10PM	SAMPLE	Page
30000000000001250000000001	0366	Request to Ship	Error	2	05/03/2005 12:05PM	SAMPLE	Page
30000000000001240000000001	0366	Request to Ship	New	0	11/05/2003 3:12PM	SAMPLE	Page
30000000000001230000000001	0365	Request to Ship (front-end)	New	0	11/05/2003 2:47PM	SAMPLE	Page

Transaction Maintenance page

All transactional-based information appears on this page. The system displays the transaction code, which identifies the transaction type, and the transaction description.

EIP Control ID

Click this link to view the transaction line details for the transaction. Detail pages for each transaction type, which are accessible from this page, provide error messages and transaction details that enable you to revise fields containing errors.

You can modify the transaction status here or in the Transaction Maintenance Detail pages. The rules for changing a transaction status are:

<i>Current Status</i>	<i>Change to Status</i>
New	Complete (cancels all lines in the transaction).
Error	Complete (cancels all lines in the transaction). Reprocess.
Complete	Can't be changed.
In Process	Can't be changed.
Reprocess	Complete (cancels all lines in the transaction).
Incomplete	Can't be changed.

Using Data Definition Maintenance

Access the Data Def Maint (data definition maintenance) page (SCM Integrations, Transaction Error Handling, Maintain Data Definitions, Data Def Maint).

Data Def Maint

Transaction Type

Grid Select

SetID

Unit

Reference

Status

Search

Staged

Error

Stage Table Data

Customize | Find | View 100 | First 1-20 of 225 Last

Stage Data

Reference

Publish Data

Date Time

Process Instance

	Status	EIP Control ID	Transaction Type	Description	User
1	Error	2000000000009480000000252	ITEM	Item Loader & ITEM_SYNC	DVP1
2	Error	2000000000009480000000253	ITEM	Item Loader & ITEM_SYNC	DVP1
3	Error	2000000000009480000000254	ITEM	Item Loader & ITEM_SYNC	DVP1
4	Error	2000000000009480000000255	ITEM	Item Loader & ITEM_SYNC	DVP1
5	Error	2000000000009480000000256	ITEM	Item Loader & ITEM_SYNC	DVP1
6	Error	2000000000009480000000257	ITEM	Item Loader & ITEM_SYNC	DVP1

Data Def Maint (page)

All data definition transactions appear on this page. Detail pages for each transaction type, which are accessible from this page, provide error messages and transaction details that allow you to revise fields containing errors.

If you want to retrieve records by transaction, select one of these transaction types:

Transaction Type	Description
AP - 100	Retrieves vendor synchronization transactions that have been received. To receive vendor synchronization transactions, you must have PeopleSoft Payables installed.
AP - 200	Retrieves vendor edit transactions that have been received. To receive voucher edit transactions, you must have PeopleSoft Payables installed.
ASNIN	Retrieves advanced shipping receipt transactions that have been received. To receive Advanced Shipping Receipt transactions, you must have PeopleSoft Purchasing installed.

Transaction Type	Description
BOM	Retrieves bills of material transactions that have been received. To receive bills of material transactions, you must have PeopleSoft Manufacturing installed.
CONSUMER	Retrieves consumer sync transactions that have been received. To receive consumer sync transactions, you must have PeopleSoft Inventory installed.
ITEM	Retrieves item loader and item sync transactions that have been received. To receive item loader and item sync transactions, you must have PeopleSoft Inventory, PeopleSoft eProcurement, or PeopleSoft Purchasing installed.
ITM_MFGGPO	Retrieves manufacturer group purchasing organization (GPO) item price list transactions that have been received. To receive manufacturer GPO item price list transactions, you must have PeopleSoft Purchasing or PeopleSoft Inventory installed.
PO	Retrieves purchase order transactions that have been received. To receive inbound sales order (850) transactions, you must have PeopleSoft Order Management installed.
POACK	Retrieves purchase order acknowledgement transactions that have been received. To receive purchase order acknowledgement transactions, you must have PeopleSoft Purchasing installed.
POCHG	Retrieves purchase order change transactions that have been received. To receive sales order change (860) transactions, you must have PeopleSoft Order Management installed.
PROCARD	Retrieves procurement card transactions that have been received. To receive procurement card transactions, you must have PeopleSoft Purchasing or PeopleSoft eProcurement installed.
PRODUCTMST	Retrieves product master transactions that have been received. To receive product master transactions, you must have PeopleSoft Order Management installed.

<i>Transaction Type</i>	<i>Description</i>
REQLOAD	Retrieves requisition loader transactions that have been received. To receive requisition loader transactions, you must have PeopleSoft Purchasing or PeopleSoft eProcurement installed.
RFQ	Retrieves request for quotation (RFQ) transactions that have been received. To receive inbound request for quote (840) transactions, you must have PeopleSoft Order Management and PeopleSoft Purchasing installed.
RFQRESP	Retrieves RFQ response transactions that have been received. To receive RFQ response transactions, you must have PeopleSoft Purchasing installed.
RMALOAD	Retrieves inventory RMA transactions that have been received. To receive RMA load transactions, you must have PeopleSoft Inventory installed.

Grid Select

Some transactions are loaded into staging tables while others remain in the Integration Broker queue until they are successfully processed. Select *Queue* to view those residing in the Integration Broker queue and *Staged* to view those that are in a stage table.

Search

Click this button to display all the transactions that match the search criteria selected.

Note. To display all of the records in the transaction log, leave the search criteria fields blank.



Click the Show Detail Entry button to access the detail pages. Detail pages for each transaction type, which are accessible from this page, provide error messages and transaction details that enable you to revise fields containing errors.

See Also

[Appendix A, "Scenarios for Integration With PeopleSoft Supply Chain Management," page 347](#)

Purging Transactions

Access the Purge page (SCM Integrations, Process Transactions, Purge, Transactional Data, Purge).

Use this page to initiate the Purge process. The Purge process will delete all transactions with a status of *Complete* or *Confirmed* from the transaction log.

Use the Data Collection Setup page to choose to not maintain a history, to maintain a history for all transactions, or to maintain a history only for transactions containing errors. You can also determine whether to purge transactions with a status of *Complete* or *Confirmed* on this page.

You can view the transaction history by running a query. Use the BCT_HIST and BCT_ERR_HIST tables to view the transaction history.

Inbound Data to Purge

You can choose to purge all transactions, whereby the system purges all transactions containing either the *Confirmed* or *Complete* status that you set up on the Data Collection Setup page. Or you can enter a number of days to purge only items with at least that many days since the last activity.

Processing Outbound EIPs

This section discusses how to process outbound EIPs.

Page Used to Process Outbound EIPs

<i>Page Name</i>	<i>Definition Name</i>	<i>Navigation</i>	<i>Usage</i>
Publish Outbound Message	IN_RUN_PUB_MSG	SCM Integrations, Publish Outbound Message	Initiate the outbound message publish process for outbound PeopleSoft SCM transactions that use the batch publish design pattern.

Processing Outbound EIPs

Access the Publish Outbound Message page (SCM Integrations, Publish Outbound Message).

Publish Outbound Message

Run Control ID: Publish

Report Manager

Process Monitor

Run

Language: English

Inventory Messages

☐ Balance Notification

☒ [Advanced Shipping Notices](#)

☐ Interunit Expected Receipts

☐ Internal Location Exp Receipts

☐ Item Status Change

☐ TMS Order Release

☐ GTIN Data Notification

☐ VMI Interunit Expected Receipt

Supplier Contract Management

☐ Supplier Contract Syndication

Purchasing Messages

☐ Request for Quotation

☐ Purchase Order Dispatch

☐ Return To Vendor

☐ PO Expected Receipts

Manufacturing Messages

☐ Production Order Update

☐ Item Revision

☐ Replenish Request Dispatch

Order Management Messages

☐ Sales Order Acknowledgement

☐ Sales Order Change Notice

☐ Sales Quote Notice

☐ Product Price List

☐ Sales Order/Quote Status

Billing Messages

☐ Billing Invoice Notice

Publish Outbound Message page

Note. This page is used only to process transactions that use the batch publish design pattern.

Select the check box by the name of the message (service operation) that you want to process. The system then makes the message name a link to a transaction-specific page for that service operation. You can process service operations one at a time or in multiples.

Processing Backbone Interlinks

This section discusses how to run the Backbone Interlink process.

Page Used to Process Backbone Interlinks

Page Name	Definition Name	Navigation	Usage
BankBone InterlinX - Process Request	SAC_BBIX_RUN_CNTL	SCM Integrations, BackBone InterlinX, Run BBIX Process, BankBone InterlinX - Process Request	Initiates transferring data from one PeopleSoft database to another.

Running the Backbone Interlink Process

Access the BankBone InterlinX - Process Request page (SCM Integrations, BackBone InterlinX, Run BBIX Process, BankBone InterlinX - Process Request).

Override

Select this check box to override the integration's default filter with a custom filter to use when processing the integration. Once selected, the system makes the Filter field available for entry.

Part 2

Integrating to Warehouse Management Systems

Chapter 5

Understanding Warehouse Management Systems

Chapter 5

Understanding Warehouse Management Systems

This chapter discusses:

- General warehouse management system (WMS) integration issues.
- WMS enterprise integration points (EIPs).
- The order-to-cash business process in a WMS integration.
- The procure-to-pay business process in a WMS integration.
- Four-wall warehousing functions in a WMS integration.
- Static information updates in a WMS integration.

General WMS Integration Issues

This section discusses system-wide assumptions about WMS integration.

Integrating PeopleSoft with a third-party WMS enables you to streamline the order-to-cash and procure-to-pay business processes. This streamlining enables you to reduce costs, improve service levels, and generate more revenue.

You can integrate the following products with a WMS:

- PeopleSoft Purchasing.
- PeopleSoft Payables.
- PeopleSoft Order Management.
- PeopleSoft Inventory.

The integration consists of generic EIPs using service operations in PeopleSoft Integration Broker to exchange transactional and static data between the PeopleSoft system and the WMS. Transactional data relates to order processing and material management. Static data relates to customers, items, carriers, and locations.

System-Wide Assumptions About WMS Integration

The WMS integration works as designed only if you understand certain system-wide assumptions and your system complies with them. The following sections discuss these assumptions.

Business Units

One WMS installation corresponds to one PeopleSoft Inventory business unit. When defining the PeopleSoft Inventory business unit in the PeopleSoft system, you specify that the business unit is under external warehouse control on the Inventory Definition - Business Unit Options page.

Static Information

All static information, such as customer, vendor, carrier, and item information, is maintained in the PeopleSoft system. Updates are sent to the WMS when new information is added or changes are made to existing information. Changes made to this information within the WMS are not sent back to the PeopleSoft system.

Quantity Balance Data

The WMS drives all inventory balances. The WMS sends material movement transactions to the PeopleSoft system. Any material movement transactions initiated in the system are *not* sent to the WMS. If the WMS is not manually updated to reflect a material movement transaction performed in the PeopleSoft system, quantity balance data between the two systems will not agree.

Open and Hold Stock Status Attributes

The PeopleSoft system does not need to track on-hand quantity balances at the material storage location level because all material movement transactions occur within the WMS. In most cases, quantity balances in the PeopleSoft system can be maintained at the business-unit level by using the *Open* or *Hold* stock status attributes to determine which stock is available to fulfill orders. In this balance structure, you can use the PeopleSoft material storage location balance record, PHYSICAL_INV, to maintain the *Open* and *Hold* quantity balances. Two storage location balance records are created in PHYSICAL_INV: one for stock quantity with an *Open* status and another for stock quantity with a *Hold* status.

When determining whether to use this structure or a more detailed balance structure, take the following considerations into account:

- Material storage locations can have a status of only *Open* or *Hold*.

Inventory status values of *Restricted* and *Rejected* are not used in a WMS integration. You should always initiate status updates in the WMS. Status changes made using the Inventory Status page or the Lot Control Information page in PeopleSoft Inventory are not reflected in the WMS and may cause discrepancies between the available (that is, *Open*) and unavailable (or *Hold*) quantity balances in the two systems.

- The status update data that the WMS sends to the PeopleSoft system does not directly change the status of stock.

Instead, the WMS reports a material storage location stock transfer in which the stock is moved to a location with the appropriate status, *Open* or *Hold*. The Inventory Transfer EIP (the EIP used to send status update data to PeopleSoft) is designed with the assumption that the *Open* or *Hold* status of a material storage location is handled in the WMS mapping logic to support the status update transaction. If the WMS implementation uses the material storage location fields in PeopleSoft Inventory for purposes other than tracking *Open* and *Hold* balances, these fields must be accounted for in the mapping logic.

- All key fields related to item definition in the PeopleSoft Inventory material storage location balance table, PHYSICAL_INV, are supported for transactions that allow entry of the item ID.

These fields include the business unit, item, staged date, lot ID, serial ID, container ID, and unit of measure. If you want to maintain a breakdown of balances at a lower level than the item ID (for example, at the lot ID or serial ID level), all transactions entered against these balances must contain all item definition keys.

- Modifications to the check boxes on the Material Storage Locations page in PeopleSoft Inventory can affect available balances for items in that location.

Changes made to these settings are not reflected in the WMS and may cause discrepancies in the available and unavailable quantity balances between the two systems.


See Also

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Managing Inventory Status"

WMS EIPs

The EIPs used to exchange data between the PeopleSoft system and a WMS are service operations defined within PeopleSoft Integration Broker.

The following diagram illustrates the data flow between the WMS and PeopleSoft Inventory, Order Management, Purchasing, and Payables:

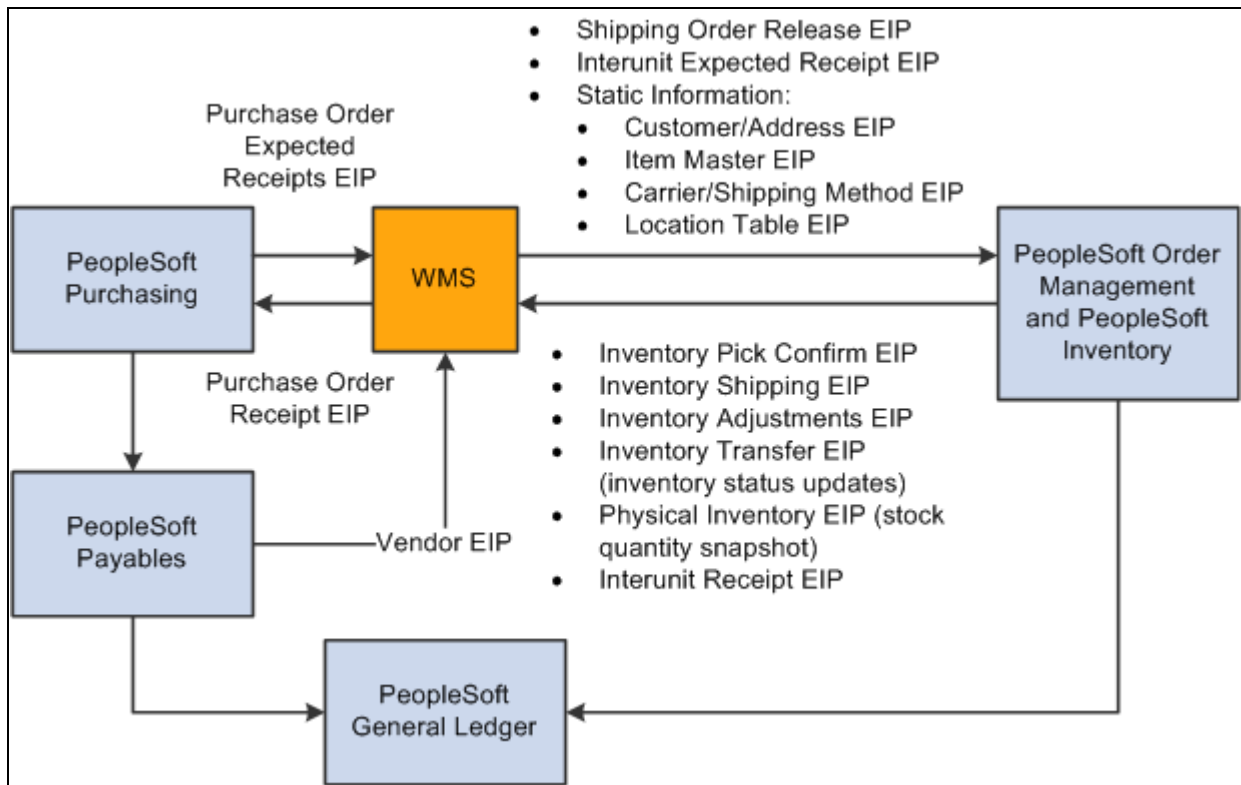

The integration between PeopleSoft and the warehouse management system using service operations.

The following sections describe the information that each EIP provides.

PeopleSoft Purchasing

The EIPs within PeopleSoft Purchasing are:

<i>EIP Name</i>	<i>Description</i>
Purchase Order Expected Receipt EIPs (outbound)	Provides the WMS with a list of expected receipts that have not been received for a dispatched purchase order. This integration point includes the following service operations; PO_EXPECTED_RECEIPT_SHIPTO and the PO_EXPECTED_RECEIPT_BUS_UNIT.
Purchase Order Receipt EIP (inbound)	This service operation updates the status of purchase order receipts in the PeopleSoft system to indicate whether the quantity on the receipt has been received in the WMS system.

PeopleSoft Order Management and PeopleSoft Inventory

The EIPs within PeopleSoft Order Management and PeopleSoft Inventory are:

<i>EIP Name</i>	<i>Description</i>
Shipping Order Release EIP (outbound)	This service operation provides the WMS with details of orders that have been released for picking and shipment.
Interunit Expected Receipt EIP (outbound)	This service operation notifies the WMS that an interunit stock transfer has been shipped to it from another PeopleSoft Inventory business unit.
Customer/Address EIPs (outbound)	Updates the customer and address information in the WMS with the current information in the PeopleSoft system. There are several service operations in this category, starting with CUSTOMER.
Item Master EIPs (outbound)	Updates item master, item business unit attributes, purchasing item attributes, item unit of measure, and item revision information in the WMS with the current information in the PeopleSoft system. There are several service operations in this category, starting with ITEM.
Carrier/Shipping Method EIPs (outbound)	Updates carrier and shipping method information in the WMS with the current information in the PeopleSoft system. There are several service operations in this category, starting with CARRIER.
Location Table EIPs (outbound)	Updates internal ship to location data in the WMS with the current information in the PeopleSoft system. There are several service operations in this category, starting with LOCATION.
Inventory Pick Confirm EIP (inbound)	This service operation reports picking and shipping activities to the PeopleSoft system.
Inventory Shipping EIP (inbound)	This service operation reports picking and shipping activities to the PeopleSoft system.
Inventory Adjustment EIP (inbound)	This service operation reports adjustments in stock quantity balances to PeopleSoft.
Inventory Transfer EIP (inbound)	This service operation reports transfers of stock quantity between material storage locations. In a WMS integration, this data is used by the WMS to modify the inventory status in PeopleSoft Inventory to <i>Open</i> or <i>Hold</i> . The stock quantity is logically transferred to a location with the appropriate status.

<i>EIP Name</i>	<i>Description</i>
Physical Inventory EIP (inbound)	This service operation reports cycle counting and complete physical inventory activities. In a WMS integration, this data is used to synchronize the quantity balances between the two systems. PeopleSoft Inventory processes this data as a stock quantity update from a counting event.
Interunit Receipt EIP (inbound)	This service operation updates the status of interunit receipts in PeopleSoft to indicate whether the quantity on the receipt has been received in the WMS system.

Note. If the Inventory business unit is integrated with WMS and uses the return to vendor (RTV) feature in PeopleSoft Purchasing, then you cannot use the *Express* option for the RTV Inventory Ship Option or the RTV Inventory Destroy Option in PeopleSoft Purchasing. The express option could cause the stock quantities between the PeopleSoft Inventory business unit and the WMS to become out of balance.

Note. In prior releases of PeopleSoft Inventory, the Shipping Notification EIP was used to send back picking and shipping details from the WMS system. The Shipping Notification EIP is available for backwards compatibility to earlier releases. However, if you are currently implementing the integration point between PeopleSoft Inventory and a WMS, use the Inventory Pick Confirm EIP and the Inventory Shipping EIP instead of the Shipping Notification EIP.

PeopleSoft Payables

The EIPs within PeopleSoft Payables are:

<i>EIP Name</i>	<i>Description</i>
Vendor EIPs (outbound)	Updates the WMS with the current data from the vendor table and its related tables in the PeopleSoft system. There are several service operations in this category, starting with VENDOR.

PeopleSoft General Ledger

PeopleSoft General Ledger is not directly integrated with the WMS. Instead, it is updated by transactions in PeopleSoft Payables, PeopleSoft Order Management, and PeopleSoft Inventory.

See Also

Chapter 2, "Understanding PeopleSoft Supply Chain Management Enterprise Integration Points," page 7

Chapter 5, "Understanding Warehouse Management Systems," The Order-to-Cash Business Process in a WMS Integration, page 109

Chapter 5, "Understanding Warehouse Management Systems," The Procure-to-Pay Business Process in a WMS Integration, page 115

Chapter 5, "Understanding Warehouse Management Systems," Four-Wall Warehousing Functions in a WMS Integration, page 120

Chapter 5, "Understanding Warehouse Management Systems," Static Information Updates in a WMS Integration, page 123

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Managing Inventory Status"

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Counting Inventory Stock"

The Order-to-Cash Business Process in a WMS Integration

This section discusses:


- Order entry.
- Reservation processing.
- Order release processing.
- Order changes.
- Shipping processing.

The order-to-cash business process enables companies to sell their goods and services to customers. Here is an overview of the process in a WMS integration:

1. PeopleSoft components are used to take the customer orders, reserve the orders against available quantity balances, and release the orders to the WMS.
2. In the WMS, the orders are picked, packed, and shipped to the customer.
3. PeopleSoft provides shipment tracking, advanced shipment notice transactions, costing, accounting, invoicing, and cash collection functions.

Order-to-Cash Process Flow in a WMS Integration

The following diagram illustrates the order-to-cash flow between PeopleSoft and a WMS. The PeopleSoft system is the entry point for the order where the stock is then reserved and released to the WMS using the Shipping Order Release service operation. The WMS picks, packs, and ships the order and sends the details back to PeopleSoft using the Inventory Pick Confirm service operation or the Inventory Shipping service operation. PeopleSoft then completes the costing and billing steps:

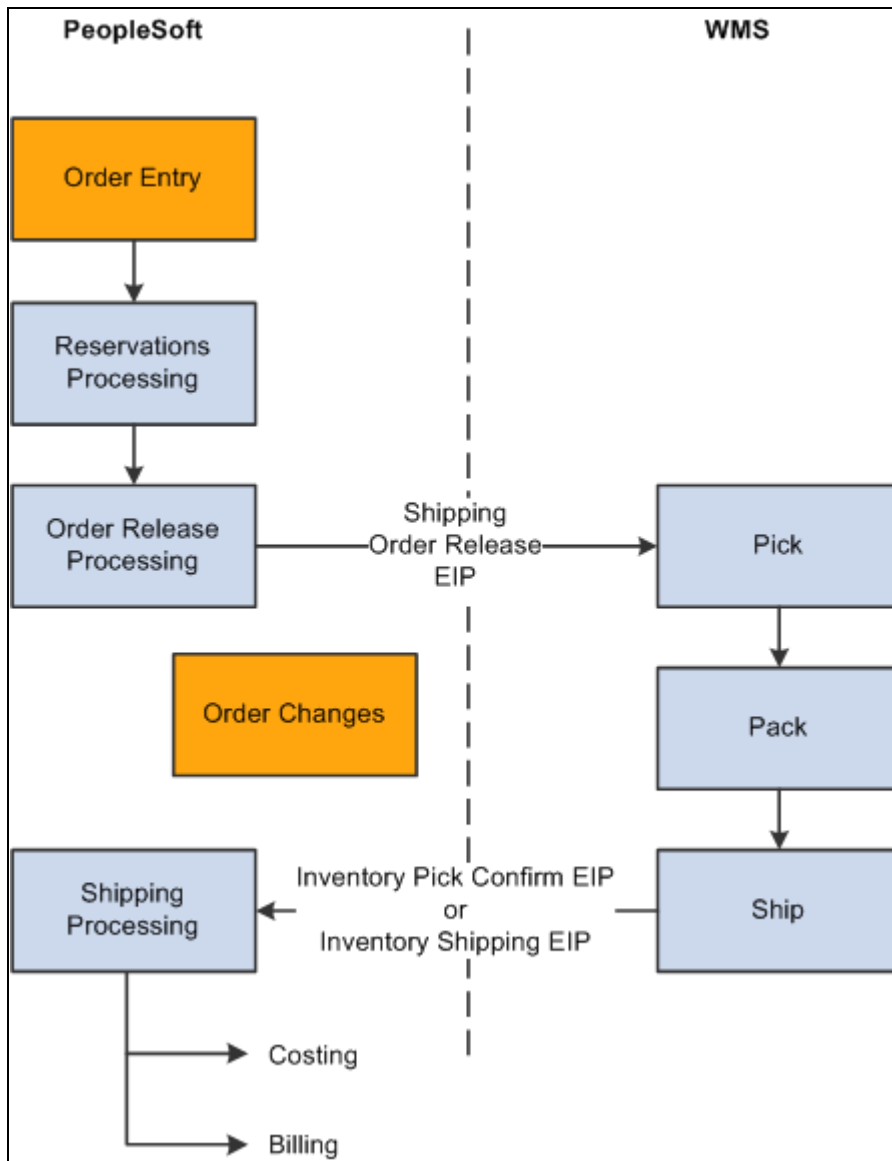

Order-to-cash process flow between WMS and PeopleSoft

The EIPs that support the order-to-cash business process in a WMS integration are based on a number of assumptions. The following sections detail the assumptions for each phase of the order-to-cash business process.

Order Entry

In a WMS integration, orders are captured and staged for fulfillment in PeopleSoft tables. PeopleSoft Inventory enables you to capture demand for stock from many sources, including sales order entry functions in PeopleSoft Order Management and material stock requests accepted from other PeopleSoft business units and third-party applications.

Regardless of demand source, all orders that are staged for fulfillment in the PeopleSoft Inventory the demand fulfillment table, IN_DEMAND, can be processed in a WMS. However, orders issued with the Creating Express Issue Stock Requests in PeopleSoft Inventory cannot be processed in a WMS. Express issue orders bypass picking, packing, and shipping functions are directly inserted into the PeopleSoft Inventory history table, TRANSACTION_INV.

See Also

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Creating Orders for Fulfillment"

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Understanding Order Fulfillment Processing"

PeopleSoft Enterprise Order Management 9.1 PeopleBook, "Introduction to Sales Order Entry"

Reservation Processing

Before the order can be released for picking in a WMS, the demand line must set to the *releasable* fulfillment state by reservation processing in PeopleSoft Inventory. A demand line can be set to the releasable state with soft-reserve, ATP promise, pre-allocation, or just released downstream for picking. A demand line could be fully or partially backordered by the reservation process.

Pre-allocations

Pre-allocations are a hard allocation of quantity at the material storage location level when orders are in the unfulfilled state. Pre-allocations include hard allocations created by the pegging feature and lot-allocations. In PeopleSoft Inventory, the Order Release Request process is run to generate the Shipping Order Release EIP. This service operation sends the hard allocations to the WMS. If PeopleSoft Inventory receives a transfer transaction for a pre-allocated item from the WMS, the transaction is rejected because allocated material cannot be transferred. Do not use pre-allocation processing if the WMS implementation has procedures that require transferring material from a material storage location to a shipping area before sending data using the Inventory Pick Confirm EIP or the Inventory Shipping EIP.

Back Orders

If back orders are permitted for orders, the back order processing takes place in PeopleSoft Inventory. Back order functionality in the WMS is not used in a WMS integration. If you allow order lines to ship with partial quantities, demand lines with the available portion of the requested quantity are inserted into IN_DEMAND, where they can be released for picking in the WMS.

See Also

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Promising and Reserving Inventory"

Order Release Processing

In a WMS integration, running the Order Release process in PeopleSoft Inventory releases eligible orders to the WMS to be picked, packed, and shipped. For PeopleSoft Inventory business units under external warehouse control, the Order Release process using the Shipping Order Release output option, sends the order data to the WMS using the Shipping Order Release EIP.

The sort selections available from the Additional Options page of the Order Release process do not control the sequence of the orders in the Shipping Order Release service operation. The order data sent to the WMS is separated into logical orders based on breaks in the following sort sequence:

1. Business unit.
2. Demand source.
3. Source business unit.
4. Order number.
5. Customer ID.
6. Ship to ID.
7. Address sequence code.
8. Carrier ID.
9. Ship via.

Note. If the Ship Using TMS Reference ID check box is selected on the Inventory Definition page then the orders released to the WMS system will be set up and sorted using the TMS Reference ID and TMS Reference ID Line Number.

Note. If the address information for an order is modified before order release, the address fields are added to the sort sequence.

For each logical order, there is a single order header that contains the address and shipping information for the order. The Order Release process assigns an external reference number to the order header. For each Order Release process run, the external reference numbers are assigned to order headers sequentially starting with 1. This number is also referenced on each demand line associated with the order header and can be viewed on the Stock Requests Inquiry page. The combination of the external reference number and the pick batch ID provides a unique key that the WMS uses to identify a specific order release transaction.

The data sent by the Shipping Order Release service operation contains detailed information for each line on the order, including details of quantities allocated to specific items and material storage locations. Lot detail for lot-allocated demand lines is always provided; however, quantity allocation for push picking plans is provided on an optional basis only.

The order release transaction in a WMS integration is the same for both pull and push picking plans. However, if you use a push picking plan (Create Allocations action on the Order Release process page), the quantities are allocated at the material storage location level. If PeopleSoft Inventory receives a transfer transaction for an allocated item from the WMS, the transaction is rejected because allocated material cannot be transferred. Push picking plans should not be used if the WMS implementation has procedures that require transferring material from a material storage location to a shipping area before sending the data using the Inventory Pick Confirm EIP or the Inventory Shipping EIP.

To delete an order line from a pick batch ID, you must manually delete the line in both PeopleSoft Inventory and the WMS. To delete the order line in PeopleSoft Inventory, use the Material Picking Feedback page. (This is the only circumstance in which the Material Picking Feedback page is used in a WMS integration.) If you do not also delete the order line in the WMS system and the line is returned to PeopleSoft Inventory on an Inventory Pick Confirm EIP or an Inventory Shipping EIP, the line is rejected because it is no longer associated with the order.

The Shipping Order Release EIP does not include substitute item detail as provided on picking plans in PeopleSoft Inventory. However, all other notes tied to a picking plan are included in this data. In addition, the Shipping Order Release EIP includes any notes associated with the bill of lading to support WMSs that print their own bills of lading.

See Also

Chapter 2, "Understanding PeopleSoft Supply Chain Management Enterprise Integration Points," page 7

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Picking Inventory"

Order Changes

In general, once an order is released to the WMS, any changes made to the order in either the WMS or in the PeopleSoft system must be manually communicated between the two systems. The PeopleSoft system does not send any order change information to the WMS. Changes made to the order shipping information in the WMS for the carrier, shipping method, and freight terms are sent to the PeopleSoft system as part of the Inventory Pick Confirm EIP or the Inventory Shipping EIP. Any other order changes made in the WMS, however, must be manually duplicated in the PeopleSoft system.

You can cancel an order line at any time until the order line has the status *Shipped* in PeopleSoft Inventory. However, in a WMS integration, first cancel the order in the WMS and then cancel the order in the PeopleSoft system using the Cancel/Hold Stock Request page. If an order canceled in PeopleSoft Inventory is actually shipped in the WMS, PeopleSoft Inventory rejects the transactional data from the Inventory Pick Confirm EIP or the Inventory Shipping EIP received from the WMS. You cannot reverse an order cancellation in PeopleSoft Inventory.

See Also

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Changing, Canceling, and Holding Orders"

Shipping Processing

When the WMS ships an order, it sends shipping information to the PeopleSoft system using the Inventory Shipping EIP. This service operation contains all the information necessary to pick, pack, and ship individual orders in the system tables. In addition to providing basic information, the transaction creates single-level shipping containers and ship serial IDs.

The Inventory Pick Confirm EIP may be used in place of the Inventory Shipping EIP if the actual shipping action will occur in the PeopleSoft system. This EIP provides all information necessary to pick and relieve bin location inventory balances but does not ship orders. Information necessary to create single level shipping containers and ship serial IDs may also be provided on this EIP.

A third alternative for providing shipping information is the Shipping Notification EIP. In prior releases, the Shipping Notification EIP was used to send back picking and shipping details from the WMS system. The Shipping Notification EIP is available for backwards compatibility to earlier releases. However, if you are currently implementing the integration point between PeopleSoft Inventory and a WMS, use the Inventory Pick Confirm or the Inventory Shipping EIP instead of the Shipping Notification EIP.

No matter which of the above three EIPs are used, shipping information overriding carriers, shipping methods and freight terms can be entered on the transactional data if changes were made at shipping time. In addition, a unique Ship ID can be assigned to each shipment coming from the WMS system. However, if the Ship ID is left blank, the system will automatically assign a shipping ID as the order is shipped.

Note. A single release order line cannot be split across two different shipping IDs.

Shipping Notification EIP

The system converts the Shipping Notification EIP to either an Inventory Pick Confirm or Inventory Shipping transaction as the data is processed by the subscription process assigned to the Shipping Notification EIP. The original Shipping Notification data is written to the transaction log (BCT_CTL and BCT_DTL) in a complete status for audit purposes only. The system also writes the Inventory Pick Confirm or Inventory Shipping transaction data to the transaction log.

The shipping notification EIP includes the shipment header and shipment lines. A shipment designated by a shipment header is defined as a shipment event for a single carrier ID, ship type ID, freight terms value, ship date, ship time, and bill of lading. These field values must be identical for all lines defined for the given instance of a shipment header.

Shipping History and Documentation

PeopleSoft collects and tracks shipping history based on the information from the Inventory Pick Confirm EIP or the Inventory Shipping EIP. If a bill of lading number is sent to PeopleSoft Inventory in the data, the PeopleSoft system updates the demand fulfillment table, IN_DEMAND, for tracking purposes only. A bill of lading is not created in the PeopleSoft system.

In a WMS integration, the required shipping documentation is usually generated using the WMS; however, you can also generate this documentation using PeopleSoft components.

See Also

Chapter 2, "Understanding PeopleSoft Supply Chain Management Enterprise Integration Points," page 7

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Picking Inventory," Entering Picking Feedback Using an Electronic Data Collection System

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Shipping Inventory"

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Understanding Order Fulfillment Processing"

The Procure-to-Pay Business Process in a WMS Integration

This section discusses:


- Requisitions.
- Purchase orders.
- Purchase order expected receipts processing.
- Receiving.

The procure-to-pay business process enables companies to buy goods and services from their suppliers. Here is an overview of the process in a WMS integration:

1. PeopleSoft components are used to manage stock replenishment, create requisitions and purchase orders, and automatically source and dispatch the purchase orders.
2. When the requested stock on purchase orders arrives, the WMS handles the receiving, inspection, and putaway transactions for the stock.
3. The PeopleSoft system provides costing and accounts payable functions.

Procure-to-Pay Process Flow in a WMS Integration

The following diagram shows how the procure-to-pay functions are performed in a WMS integration. PeopleSoft creates and dispatches the purchase order or the interunit stock request. The Purchase Order Expected Receipts service operation or the Interunit Expected Receipt service operation is used to send expected receipt data to the WMS. The incoming stock is received and inspected by the WMS. The Purchase Order Receipt service operation or the Interunit Receipt service operation sends the receiving information back to PeopleSoft where inventory putaway, costing, and accounts payable vouchers are processed:

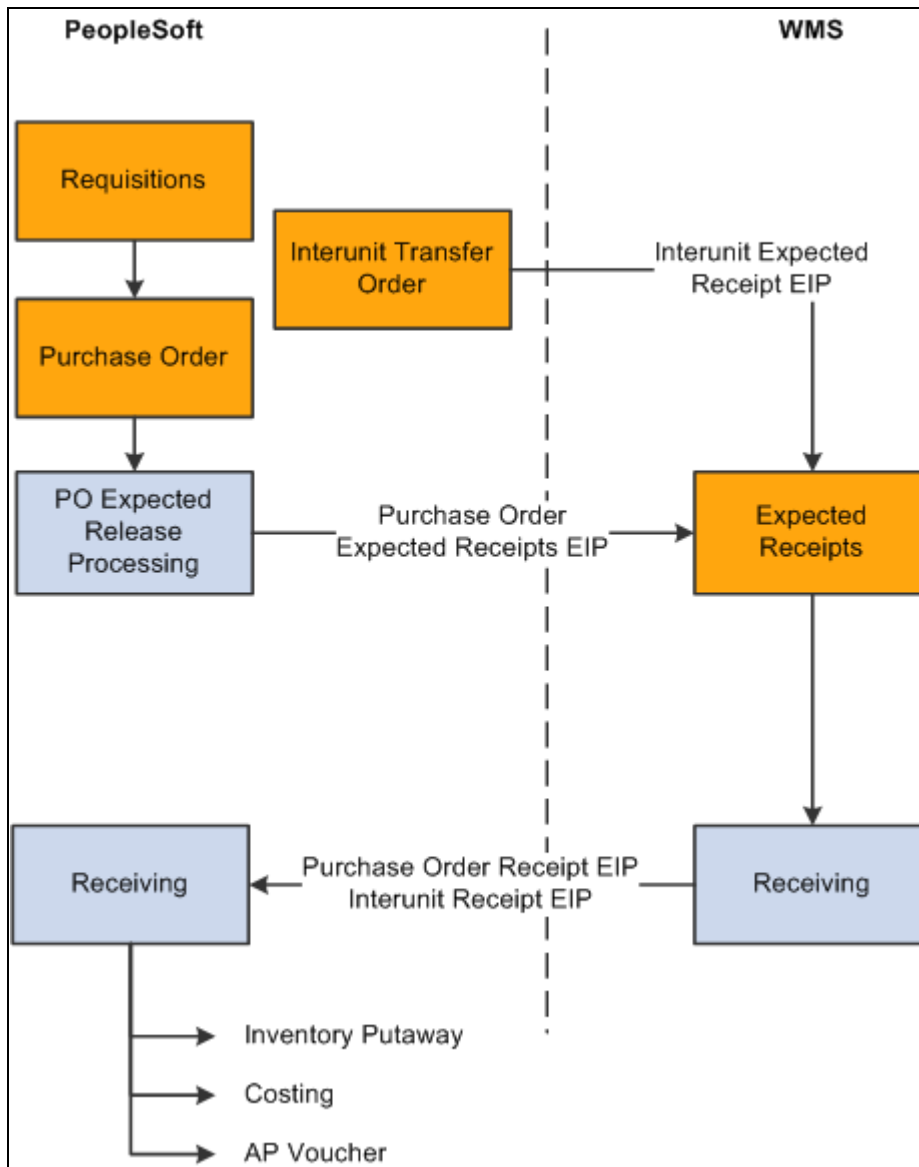

The business process flow for procure-to-pay between PeopleSoft and a WMS

The EIPs that support the procure-to-pay business process in a WMS integration are based on a number of assumptions. The following sections detail these assumptions for each phase of the procure-to-pay business process.

Requisitions

Requisitions can be created in PeopleSoft Purchasing using a variety of methods. After a requisition is created, it moves through PeopleSoft Purchasing to become either a purchase order that is sent to a vendor or a demand that is staged in a PeopleSoft Inventory business unit. In a WMS integration, requisitions are created and maintained in the PeopleSoft system. Requisitions are not sent to the WMS.

See Also

PeopleSoft Enterprise Purchasing 9.1 PeopleBook, "Understanding Requisitions"

Purchase Orders

As with requisitions, purchase orders can be created in PeopleSoft Purchasing using a variety of methods. After they are approved and sourced, purchase orders are dispatched to vendors.

See Also

PeopleSoft Enterprise Purchasing 9.1 PeopleBook, "Understanding Purchase Orders"

Purchase Order Expected Receipts Processing

For purchase orders that will be received by a business unit under external warehouse control, the PeopleSoft system publishes outbound information using the Purchase Order Expected Receipts EIP. When receiving the stock from a purchase order, the WMS matches the actual receipt against the data in the PO expected receipts transaction.

The transactional data in the PO Expected Receipt EIP is sent to the WMS for dispatched purchase orders that are expected to be received within a user-defined period. If a change is made to a purchase order that has been included in a previous PO expected receipts transaction, another expected receipt transaction is published when the change event occurs. This includes closing or canceling the purchase order. When the WMS receives a PO expected receipts transaction for a purchase order with a *Closed* or *Canceled* status, the corresponding PO expected receipt transaction in the WMS can also be closed or canceled.

The PO expected receipts transaction includes purchase order header, order line, schedule line, and comment information. The PO expected receipt line segment includes an order quantity field that represents the total of the associated schedule lines. The schedule line segment contains a combination of specific purchase order line, schedule, and distribution information. Purchase order comments and notes segments are provided at the header, line, and schedule levels.

Note. The order quantity on the receipt line is provided for WMSs that cannot handle the three-level purchase order structure (header, line, and schedule). In this case, the WMS uses the purchase order line-level receipt variation (Transaction Code 0103) of the purchase order receipt transaction.

In the PeopleSoft system, there are two service operations that make up the Purchase Order Expected Receipt EIP:

- The first service operation (PO_EXPECTED_RECEIPT_BUS_UNIT) contains PO expected receipt information for a specific PeopleSoft Inventory business unit.

For example, you may have a single purchase order line with an order quantity of 75 units that are distributed among three different PeopleSoft Inventory business units for a quantity of 25 units each. Three different purchase order expected receipt transactions containing an order line quantity of 25 are generated, one for each inventory business unit. This is the transaction that is used in most WMS implementations, because most WMSs expect purchase order information for the specific business unit under their control.

- The second service operation (PO_EXPECTED_RECEIPT_SHIPTO) contains PO expected receipt information for a specific ship to location.

In this case, the PO expected receipts are grouped by ship to location instead of business unit. Using this second type of purchase order expected receipt transaction in the preceding example, the system generates a single transaction for a total quantity of 75 units.

The Publish Outbound Message process publishes the purchase order expected receipt data for all PeopleSoft Inventory business units or ship to locations on purchase orders that meet specified selection criteria.

Only the Process Outbound Message process publishes purchase order expected receipt data. An expected receipt transaction cannot be generated from the Return to Vendor - RTV page. This constraint has the following implications for a WMS integration:

- When you reopen a purchase order in PeopleSoft, no transaction is sent to the WMS to reopen the purchase order; however, if you make a change to the reopened purchase order, the system sends a PO expected receipt message to the WMS, where the purchase order has a *Closed* status.

To resolve this discrepancy, you can set up the WMS to reopen a purchase order automatically if a PO expected receipt transaction is received for a closed purchase order. Alternatively, for business units under WMS control, the option to reopen purchase orders for vendor returns, RTV Reopen PO, can be disabled in the PeopleSoft system on the Purchasing Definition - Business Unit Options page.

- When you perform a vendor return in PeopleSoft Purchasing, you can return a quantity for replacement.

When you select the return-for-replacement option, the quantity that was received is reduced by the quantity you are returning for replacement. This logic makes the open quantity on the purchase order equal to the returned quantity. However, because no PO expected receipt data is sent to the WMS from the Return to Vendor - RTV page, the new open quantity is not reflected in the WMS. To resolve this discrepancy, you can either:

- Enable the WMS to over-receive, this will allow receipts greater than the original order quantity.

This solution requires that the WMS be able to receive against a closed purchase order. If the purchase order was originally closed in the PeopleSoft system and then reopened from the RTV page, the status of the purchase order remains closed in the WMS.

- Disable the RTV Adjust Source option on the Purchasing Definition - Business Unit Options page.

When you disable this option, the receipt quantity (Net Receive Qty) is not decreased when you return for replacement from the Return to Vendor - RTV page. With this solution, after entering the return-to-vendor information, you add a new schedule for the replacement quantity on the Purchase Order - Form page. The change on the Purchase Order Form page generates PO expected receipt information, which provides the WMS with an open quantity against which to receive.

Interunit Transfer Expected Receipts Processing

Interunit transfer orders are created in the PeopleSoft system to move stock between business units. The Interunit Expected Receipt EIP is an asynchronous outbound service operation (INTERUNIT_EXPECTED_RECEIPT). The transactional data is generated by the Process Outbound Message process using this EIP when an interunit transfer order has a destination business unit that is under external warehouse control and the transfer order is depleted. The WMS uses the information from the interunit expected receipt EIP to validate the receipt of goods when the shipment arrives at the destination warehouse.

The interunit expected receipt EIP includes receipt header information and receipt lines with details of each item that was shipped.

In PeopleSoft Inventory, you can cancel in-transit interunit transfer orders using the Cancel Interunit Transfers page. For transfer orders that have been sent out on previous interunit expected receipt transaction, the cancellation transaction generates an interunit expected receipt transaction with a status of *Cancel*.

See Also

PeopleSoft Enterprise Purchasing 9.1 PeopleBook, "Creating Requisitions Online," Creating Requisition Lines

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Transferring Stock Between Business Units"

Receiving

In a WMS integration, all receiving, inspection, and putaway activities are performed using the WMS. To confirm that stock has been received for a purchase order or an interunit transfer, the WMS sends a receipt confirmation transaction to the PeopleSoft system using the Purchase Order Receipt EIP or the Interunit Receipt EIP.

For both purchase order and interunit receipts, the receipt confirmation transaction includes header information and receipt lines with details about what was physically received at the business unit under WMS control.

The WMS can include the receipt ID and receipt line number in either of the receipt confirmation transactions. To ensure that receipt IDs assigned by the WMS are unique, define a range of ID numbers during implementation for exclusive use by the WMS. If the receipt ID is not included on the confirmation, the PeopleSoft system generates one automatically.

If either of the receipt confirmation transactions includes the material storage location data, the item is put away to the specified material storage location. Otherwise, the item is put away using the putaway rules defined for the business unit.

Blind receipts from a WMS are not accepted. All receipt confirmation data that the WMS sends must have a valid purchase order number or interunit ID number.

In PeopleSoft Purchasing, the Receiver Load process (PO_RECVLOAD) processes the purchase order receipt confirmation transactions. The Receiver Load process can accept purchase order receipts at either the purchase order line or schedule level. During a WMS implementation, consider these processing rules when deciding how best to use this functionality:

- When working at the schedule level, the Receiver Load process receives the full quantity against a given schedule line number.

When working at the line level, the Receiver Load process applies the full quantity received to the first open schedule for that line unless the Allow Receipt Load Cascade option is enabled to cascade receipts across multiple schedules. If the cascading feature is enabled, any full quantity is applied to the first schedule, and any excess quantity is applied to the next schedule, and so on until the full quantity is consumed. You set the Allow Receipt Load Cascade option on the Purchasing Definition - Business Unit Options page.

- The inventory business unit is included in the receipt transaction to associate the receipts to the appropriate distribution line.

If the inventory business unit is included on the transaction, the receipt affects only the quantity for the business unit's distribution line. If the inventory business unit is blank, the quantity received is received against each distribution line until the entire quantity for the schedule is received.

The Interunit Receiving process (INPJIURV) processes the interunit transfer receipt confirmation transactions. When an interunit receipt is completely received and closed, an interunit expected receipt transaction is generated with a status of *Received*. The *Received* status on the transaction indicates that the transfer order can be closed in the WMS system.

See Also

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Receiving and Putting Away Stock"

PeopleSoft Enterprise Purchasing 9.1 PeopleBook, "Receiving Shipments"

Four-Wall Warehousing Functions in a WMS Integration


This section discusses:

- Inventory adjustments.
- Storage location transfers (inventory status updates).
- Physical inventory (stock quantity snapshots).

Four-wall functions are material management activities bounded by the four walls of a specific warehouse, including performing cycle counts and full physical inventory counts, adjusting quantities for specific material storage locations, replenishing fixed picking locations, and making any other stock transfers between material storage locations. In a WMS integration, all four-wall functions are performed in the WMS and then reported to the PeopleSoft system by using EIPs.

Process Flow for Four-Wall Warehousing Functions in a WMS Integration

The following diagram shows the process flow for four-wall EIPs in a WMS integration. The WMS performs any wall-to-wall inventory counts or cycle counts and then passes the data to PeopleSoft Inventory using the Physical Inventory service operation. The WMS also performs any warehouse transfers or stock adjustments and passes this information to PeopleSoft using the Inventory Transfer service operation and the Physical Inventory service operation:

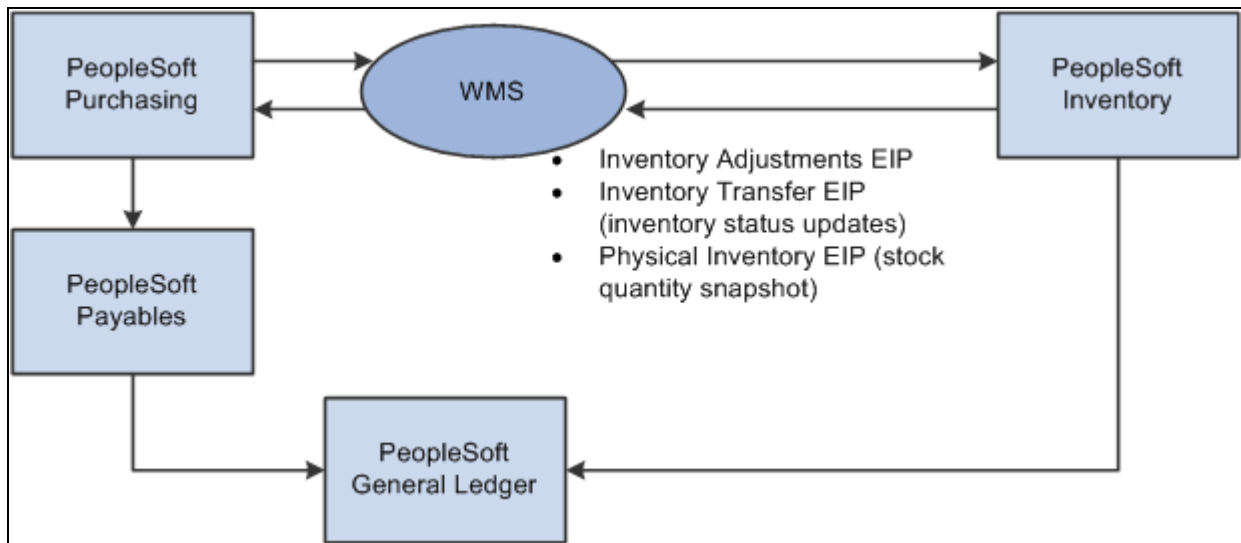

Four-wall warehousing integration between PeopleSoft and the WMS

The EIPs that support the four-wall functions in a WMS integration are based on a number of assumptions. The following sections detail the assumptions for each function.

Inventory Adjustments

Inventory quantity adjustment transactions are generated from the WMS using the Inventory Adjustment EIP. The inventory adjustment transaction notifies PeopleSoft Inventory of quantity changes required for defective, found, or lost stock. This transaction is a simple quantity adjustment for an item in a particular material storage location.

Distribution types on the adjustment transaction are used for inventory accounting. Some WMSs have charge codes that match up to the distribution type fields. However, if the WMS charge codes differ from the distribution types established in PeopleSoft Inventory on the Distribution Type page, the WMS charge codes must be converted to match the PeopleSoft distribution types when the transactional data is mapped. If the distribution type field is left blank, the PeopleSoft system uses the default distribution type established for the selected adjustment type on the Default Distribution Type page.

Note. ChartField overrides are not permitted for adjustment transactions.

Storage Location Transfers (Inventory Status Updates)

To notify PeopleSoft Inventory of material transfers between material storage locations, the WMS generates inventory transfer data using the Inventory Transfer EIP. In a typical WMS integration in which quantity balances are tracked only at the business unit level in the PeopleSoft system, the inventory transfer data sent to the PeopleSoft system change the status of the stock to *Open* or *Hold*. In PeopleSoft Inventory, two storage locations are defined in the PHYSICAL_INV table: one for quantity with an *Open* status and another for quantity with a *Hold* status. Inventory status change transactions originating from the WMS must be translated to map to the EIP by identifying the *Open* and *Hold* locations that are used in the PeopleSoft system.

Physical Inventory (Stock Quantity Snapshots)

To synchronize quantity balances between the two systems, the WMS uses the Physical Inventory EIP to send PeopleSoft Inventory a stock quantity snapshot transaction that reflects the current stock quantity balances for the business unit. In PeopleSoft Inventory, this data is processed as a physical inventory transaction. You can use the quantity balances in this inbound data to run a reconciliation report and stock quantity update process, just as you would for a cycle or physical count performed for an PeopleSoft Inventory business unit that is not integrated with a WMS.

Because the success of the WMS integration relies on synchronous quantity balances between the two systems, a quantity balance synchronization procedure should be performed as often as feasible.

Synchronizing Quantity Balances

Here are steps for synchronizing quantity balances between PeopleSoft Inventory and a WMS:

1. In the WMS, perform a counting event and use the Physical Inventory EIP to send PeopleSoft Inventory a transaction that reflects the current quantity count.

A counting event can be for all items in the WMS or for a specific item, lot, or material storage location. Each stock quantity snapshot includes header information for the counting event and lines detailing the count quantity and material storage location information for each item counted. When the data is received, PeopleSoft Inventory loads the counting event data into the electronic data collection transaction tables.

Note. The data sent using the Physical Inventory EIP is used to perform periodic checks of the quantity balance synchronization between the two systems. There is no expectation that an actual cycle count or physical inventory count has occurred in the WMS. The Physical Inventory EIP is not used to communicate quantity balance changes from a physical inventory or cycle counts in the WMS. In these cases, the WMS sends PeopleSoft Inventory an adjustment using the Inventory Adjustments EIP.

2. Run the Physical Inventory process (INPIPHYS) to move the counting event data to the count table (COUNT_INV) in PeopleSoft Inventory.

Set up run control parameters for the Physical Inventory Load process on the Physical Inventory Process page under the SCM Integrations menu.

3. Run the Physical Accounting Reconciliation report to detect any discrepancies between the two systems.

Set up run control parameters for the Physical Accounting Reconciliation report on the Reconciliation Report page. If you find a discrepancy and do not want to accept the adjustment, you can use the Item Counts page to change the status of the counting event line to exclude it from the Stock Quantity Update process (INPOPOST).

4. Run the Stock Quantity Update process to update the quantities in PeopleSoft Inventory.

Set up run control parameters for the Stock Quantity Update process on the Stock Quantity Update Process page.

See Also

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Counting Inventory Stock"

Static Information Updates in a WMS Integration


This section discusses:

- Customer data.
- Vendor data.
- Item data.
- Carrier and shipping method data.
- Location data.

Static information includes data about customers, vendors, items, carriers, and locations. In a WMS integration, all static information is maintained in the PeopleSoft system and update information is sent to the WMS as necessary. If a change is made to any part of the static information in the PeopleSoft system, even to a field that does not exist on the outbound message, information indicating a change event is sent to the WMS.

Process Flow Static Information Transfers in a WMS Integration

The following diagram shows the process flow for static information transfers between a WMS and PeopleSoft, including customer, vendor, item, carrier, shipping method, and location table data:

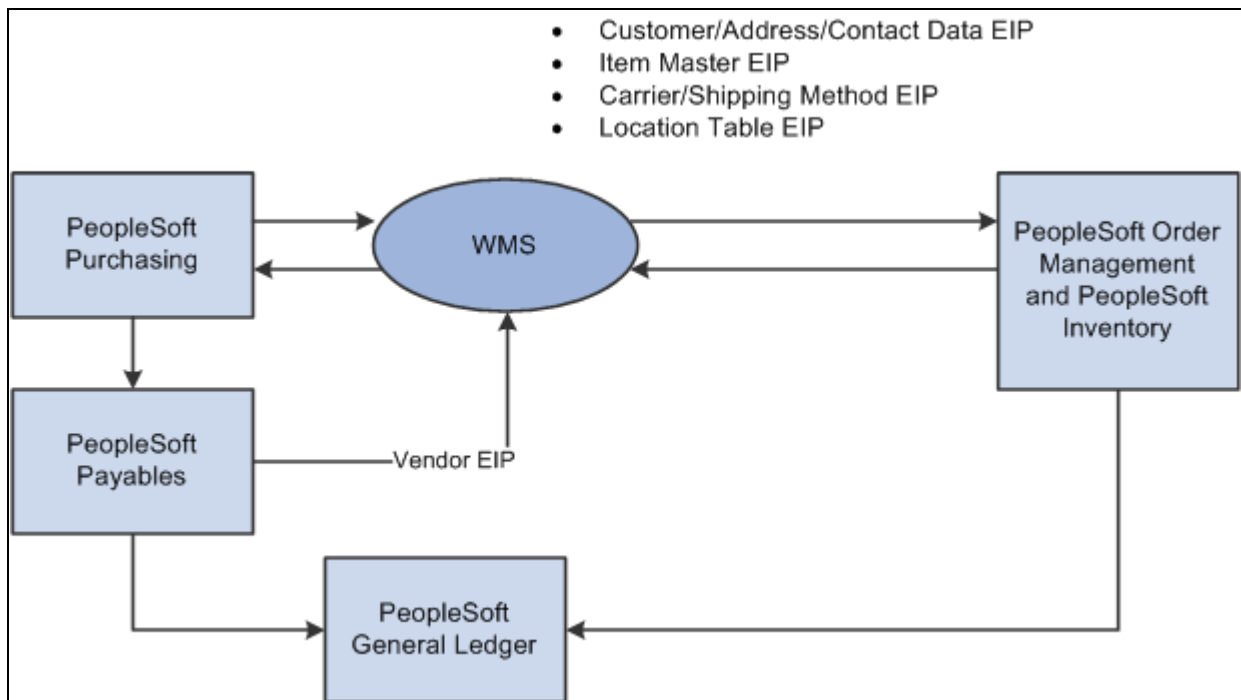

Static information transfers in a WMS integration

The EIPs that support the static information updates in a WMS integration are based on a number of assumptions. The following sections detail these assumptions for each static data type.

Customer Data

Using the Customer/Address EIPs, the PeopleSoft system publishes updates for customer-related information to the WMS when a customer record is created, changed, or inactivated. These EIPs includes customer master and address information and may be filtered based on the PeopleSoft setID.

See Also

PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook, "Maintaining General Customer Information"

Vendor Data

Using the Vendor EIP, the PeopleSoft system publishes updates for vendor-related information to the WMS when a vendor record is created, changed, or inactivated. The information may be filtered by the PeopleSoft setID.

See Also

PeopleSoft Enterprise Source-to-Settle Common Information 9.1 PeopleBook, "Maintaining Vendor Information"

Item Data

Using the Item Master EIP, the PeopleSoft system publishes updates for item-related information to the WMS when an item record is created and set to an approved status, or when changes are made to the item after it has reached an approved status. The data includes item master, item detail, unit of measure, purchasing attributes, business unit attributes, and business unit weight and volume information for approved items only. The item data may be filtered by both the PeopleSoft setID and business unit.

See Also

PeopleSoft Enterprise Managing Items 9.1 PeopleBook, "Defining Items by SetID"

Carrier and Shipping Method Data

Using the Carrier/Shipping Method EIP, the PeopleSoft system publishes updates for carrier-related information to the WMS when a carrier record is created or changed. The transaction includes carrier master information and is filtered by the PeopleSoft setID.

See Also

PeopleSoft Enterprise Application Fundamentals 9.1 PeopleBook, "Defining Financials and Supply Chain Management Common Definitions," Setting Up Freight Carriers

Location Data

Using the Location Table EIP, the PeopleSoft system publishes updates for location-related information to the WMS when a location record is created or changed. The data includes location master information and is filtered by the PeopleSoft setID. The locations are established on the Location - Location Definition page in the PeopleSoft system to identify the address of an internal location that can receive interunit transfer orders. The WMS uses the location on interunit transfer orders as it would the customer ID on customer sales orders.

Part 3

Integrating to Healthcare Applications

Chapter 6

Integrating With a Third-Party Point-of-Use Supplier System

Chapter 7

Integrating With a Third-Party Surgical Resource Software Application

Chapter 6

Integrating With a Third-Party Point-of-Use Supplier System

This chapter provides an overview of point-of-use (POU) supplier systems and discusses how to:

- Define par location data for the POU supplier and the PeopleSoft system.
- Manage item replenishment data in the POU supplier and the PeopleSoft system.
- Restock a POU supplier.
- Use POU supplier enterprise integration points (EIPs).

Understanding POU Supplier Systems

This section discusses:

- General assumptions about POU supplier systems.
- Definition of items and par locations.
- Chunking Rules for streamlining POU supplier integration processes.
- POU suppliers as par locations in PeopleSoft Inventory.
- Returns to vendors (RTVs) for POU supplier items.

You can integrate PeopleSoft Inventory par location functionality with POU supplier systems. This integration consists of generic EIPs, using service operations in PeopleSoft Integration Broker to exchange applicable par location, item counts, and expected receipt information between the PeopleSoft system and the POU supplier.

This chapter describes the implementation of a full integration between POU medical supply dispensing cabinets and PeopleSoft. The use of POU supplier systems for issuing medical supplies is prevalent in today's typical hospital environment. POU supplier systems maintain available stores of medical supplies for the immediate and ad hoc needs of a hospital's surgical, nursing, and distribution staff during normal operations. A POU supplier system maintains on-hand quantities at all times and records patient usage as it occurs.

A POU supplier system can be a complete standalone system, but it is usually integrated with a hospital's materials management information system (MMIS), such as PeopleSoft Inventory and PeopleSoft Purchasing. Integrating a POU supplier system with an MMIS can help a healthcare organization achieve maximum benefit from its investments on both fronts.

In this integration scenario, the PeopleSoft system is responsible for:

- Defining and maintaining the par location and item information.
- Issuing stock from inventory to the par locations.
- Performing the receipt of purchased goods.
- Replenishing the materials to the par locations.

The POU supplier systems are responsible for:

- Keeping track of the stock on hand in the POU locations.
- Capturing the use of the medical supplies issued.

That use can in turn be charged directly to a specific patient's account. If the charges are made directly to patient accounts, the POU supplier system is also usually integrated with the hospital's patient accounting or clinical systems.

Assumptions About POU Supplier System Integration

The POU supplier system integration works as designed only if you understand the following assumptions and your system complies with them:

- Because patient usage is recorded in the POU supplier system and not in PeopleSoft Inventory, the material usage and reconciliation feature in PeopleSoft Inventory should not be used.

Any reconciliation procedures must be handled by the POU supplier system.

- If you use POU supplier systems in some locations and PeopleSoft Inventory par locations in others, and if you plan to use the consumer usage feature, you need to set up two feeds to the admission, discharge, and transfers and patient billing systems: one from PeopleSoft and one from the POU supplier system.
- If a POU supplier is reconfigured, for example, if bins are removed, added, or moved, the physical reconfiguration of the POU supplier needs to occur first, followed by the manual online maintenance of the par location in PeopleSoft Inventory.

The Par Location EIP transactions are then published to update the supplier accordingly.

- All par locations, whether integrated with a POU supplier system or not, are replenished using the PeopleSoft Inventory Create Par Replenishment Requests process (INPGCDMD).

Definition of Items and Par Locations for a POU Supplier Integration

All item and par location data is set up and maintained in the PeopleSoft system. However, a successful integration with a POU supplier depends on understanding how the POU supplier system uses the fields that you define in the PeopleSoft system. Here are two important points to keep in mind:

- The charge code and the usage tracking method (charge type) are required fields for every item in the par location for use with POU supplier systems.

Because the POU suppliers pass patient usage information directly to a patient billing system, these two pieces of information are vital. Both fields are part of the par location definition created in the Par Location Definition component, and they are included in the par location data that PeopleSoft Inventory sends to the POU supplier system.

- The same item can exist in a par location in both the PeopleSoft system and POU supplier system.

The compartment in the PeopleSoft system and the bin in the POU supplier both identify the unique location of an item in the POU par location. The POU supplier's bin is a system-generated, assigned field and the PeopleSoft system's compartment field cannot be fed into it. The POU supplier system needs to process the PeopleSoft compartment information separately to avoid data update conflicts.

See Also

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Tracking Material Usage"

Chunking Rules for Streamlining POU Supplier Integration Processes

You can use the PeopleSoft chunking methodology to reduce the volume of data that are sent in the outbound publishing process. Chunking enables you to segment a transaction by business unit and location or par location and define which nodes receive the specific information. This functionality is especially helpful if not all of your subscribing nodes need to receive the data published by all departments. For example, you can set up processes so that business units and locations that exist as subscribers in third-party systems receive only the data that are specifically published for them according to the chunking rules and node maps that you implement.

See Also

Enterprise PeopleTools 8.50 PeopleBook: Integration Broker

POU Suppliers as Par Locations in PeopleSoft Inventory

Rather than setting up POU suppliers as PeopleSoft Inventory business units, you can set up your system to track POU suppliers as par locations within PeopleSoft Inventory. In this case, par location replenishment transactions for affected items must be subject to the same replenishment rules in PeopleSoft Inventory or PeopleSoft Purchasing.

However, the PeopleSoft system is not responsible for consumer charges because POU supplier systems pass this information to the consumer accounting system. The direct purchase and direct inventory issue processes to the POU suppliers should remain as originally designed in the PeopleSoft system.

See Also

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Managing Par Inventory"

RTVs for POU Supplier Items

A PeopleSoft Purchasing RTV should be created if an incorrect item is delivered for replenishing a POU supplier. This kind of mistake is typically discovered at the main loading dock of the healthcare facility. However, if the item has already been received into PeopleSoft Purchasing, a transaction will have already been published to the POU supplier system. In this case, the POU supplier never receives the shipment and the system never fills the PO Receipt Notification transaction that is issued for the item.

See Also

PeopleSoft Enterprise Purchasing 9.1 PeopleBook, "Managing Vendor Returns"

<https://support.oracle.com/CSP/ui/flash.html>

Defining Par Location Data for the POU Supplier and the PeopleSoft System

This section discusses the procedures and application functions that are used to maintain par location data in PeopleSoft Inventory and the POU supplier system. Here are steps for defining and maintaining the par location data:

1. Decide on and document the specifications for the POU supplier configuration.

You build the POU supplier system based on the specifications (for example, compartment sizing, capacity, and so forth). Thoroughly document the system requirements.

2. Create par locations in the PeopleSoft system that correspond to the POU supplier.

Once you determine the configuration of the supplier and build the POU supplier system, create the corresponding par location in the PeopleSoft system by using the Par Location Definition component. You set up and maintain all item and par location data in the PeopleSoft system.

3. Run the Full Data Publish process to initially populate the POU supplier with item data.

Use the Full Data Publish process (available under the Manage Integration Rules menu) to publish a full-data replication of the par locations for the initial implementation by using the PAR_LOCATION_FULL_SYNC service operation (EIP). Run this process after the par locations are defined. This service operation is used to initially populate the POU supplier with par location item data.

4. Save changes to the Par Location Definition component to update the POU supplier.

All subsequent changes saved to the Par Location Definition component for existing par locations are sent to the POU supplier in partial-data replication (PAR_LOCATION_SYNC service operation) using the Par Location EIP. These partial-data replications are published when saving the Par Location Definition component to keep the POU supplier current with ongoing PeopleSoft Inventory par location definitions and item changes.

See Also

Chapter 2, "Understanding PeopleSoft Supply Chain Management Enterprise Integration Points," page 7

Managing Item Replenishment Data in the POU Supplier and the PeopleSoft System

This section discusses the procedures and application functions used to manage item replenishment data in POU suppliers and PeopleSoft. Here is the process for managing item replenishment data:

1. The POU supplier system tracks on-hand quantity and material usage.

The POU supplier system maintains on-hand quantities for each of its par location items set up in the PeopleSoft Inventory Par Location Definition component, and it records consumer material usage throughout the day.

2. The POU supplier system publishes on-hand par location count data to PeopleSoft Inventory.

The POU supplier uses the Par Location Count EIP to publish on-hand par location count data to PeopleSoft Inventory. This publication occurs at user-requested intervals from the POU supplier to provide the PeopleSoft system with current on-hand quantities for each item in the POU par locations.

3. PeopleSoft Inventory subscribes to the on-hand par location count data from the POU supplier system.

PeopleSoft Inventory uses the Par Location Count EIP to subscribe to this data. Once the data is received, the PeopleSoft system updates the par location count tables and the par location count information is ready to be processed using the Create Par Replenishment Requests process (INPGCDMD).

Note. Any existing POU supplier-based replenishment processes are not used in this integration.

4. Run the Create Par Replenishment Requests process (INPGCDMD) in PeopleSoft Inventory.

The Create Par Replenishment Requests process takes each par location count and replenishes items that fall below the par level that you identify on the Par Location Definition - Line page. A purchase order, requisition, or material stock request is created in the PeopleSoft system to replenish the stock to par levels.

5. Deplete the material stock requests created to replenish a POU supplier.

For material stock requests that have issued stock from inventory to the par location and have been depleted, the Internal Location Expected Receipt EIP publishes data to the POU application using the IN_PUB_MSG Application Engine process.

6. Receive direct-purchase items with the Receiving component in PeopleSoft Purchasing.

Receiving material against a purchase order in the Receiving component in PeopleSoft Purchasing triggers the publication of a data transaction to the POU supplier using the Purchase Order Receipt Notification EIP. This transaction identifies all direct-purchase items and quantities that have been received and are delivered to specified locations. The Receipt Push process (RECV_PUSH) loads the stage table (RECV_PUSH_NTIFY). If a chunking rule for the service operation and publish rule exists on the publish rule definition table (EO_MSGPUBDEFN), then the system creates staging records for only those par location receipt transactions that have the par location defined on the par location chunking table (IN_BU_PAR_EOC). If the chunking rule does not exist, then staging records are created for all par location receipt transactions. Once the stage table is loaded, it calls the program that in turn publishes the receipt notification data.

See Also

Chapter 2, "Understanding PeopleSoft Supply Chain Management Enterprise Integration Points," page 7

<https://support.oracle.com/CSP/ui/flash.html>

Chapter 7, "Integrating With a Third-Party Surgical Resource Software Application," page 139

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Managing Par Inventory," Replenishing Par Locations

Restocking a POU Supplier

This section discusses the typical procedure used to physically restock POU supplier systems. Here are the steps:

1. Generate the appropriate reports for the material to be restocked at the POU supplier.

Typically, the technician assigned to restock the POU supplier is prompted through the POU supplier restock event by the light guides on the POU supplier unit. The lights are activated based on the information in the data sent using the Internal Location Expected Receipt EIP (outbound) or Purchase Order Receipt Notification EIP (outbound).

For item issues out of inventory, the Shipping Document Report page (INC6503) can be requested to accompany the delivery of the stock items to the POU par location. For purchased items, the Receiver Delivery report (POY5030) can be generated to accompany the stockless and non-stock items to the POU par location.

The restock technician can then use these reports along with the light guides on the POU to ensure that the par locations are updated with the correct quantities.

2. Compare expected receipts with actual receipts, and record discrepancies.

When restocking a light-guided POU supplier, the technician follows the lights on the POU supplier and, for each item, verifies that the quantity displayed, or the expected receipt quantity, is the same as the actual quantity received. If the quantity received is different from the expected quantity, the technician records the variation on the report.

3. Manually restock the POU bin or compartment with the received stock.

The technician refills the bins or compartments in the POU supplier with the received stock.

4. Complete the restocking event in the POU supplier system.

The final step of the restocking event takes place in the third-party POU supplier system. Typically, the technician updates the POU supplier system with the actual quantities that are used to restock the POU supplier bins or compartments.


Using POU Supplier EIPs

Four EIPs (service operations in PeopleSoft Integration Broker) are used to exchange data between the PeopleSoft Inventory and the POU supplier systems. They are:

- Par Location EIP (outbound).
- Par Location Count EIP (inbound).
- Internal Location Expected Receipt EIP (outbound).
- Purchase Order Receipt Notification EIP (outbound).

Following the Data Flow Between the PeopleSoft System and the POU Supplier System

The following diagram illustrates the data flow between a POU supplier and PeopleSoft, including integration for par location counts, receipts, and internal location expected receipts:

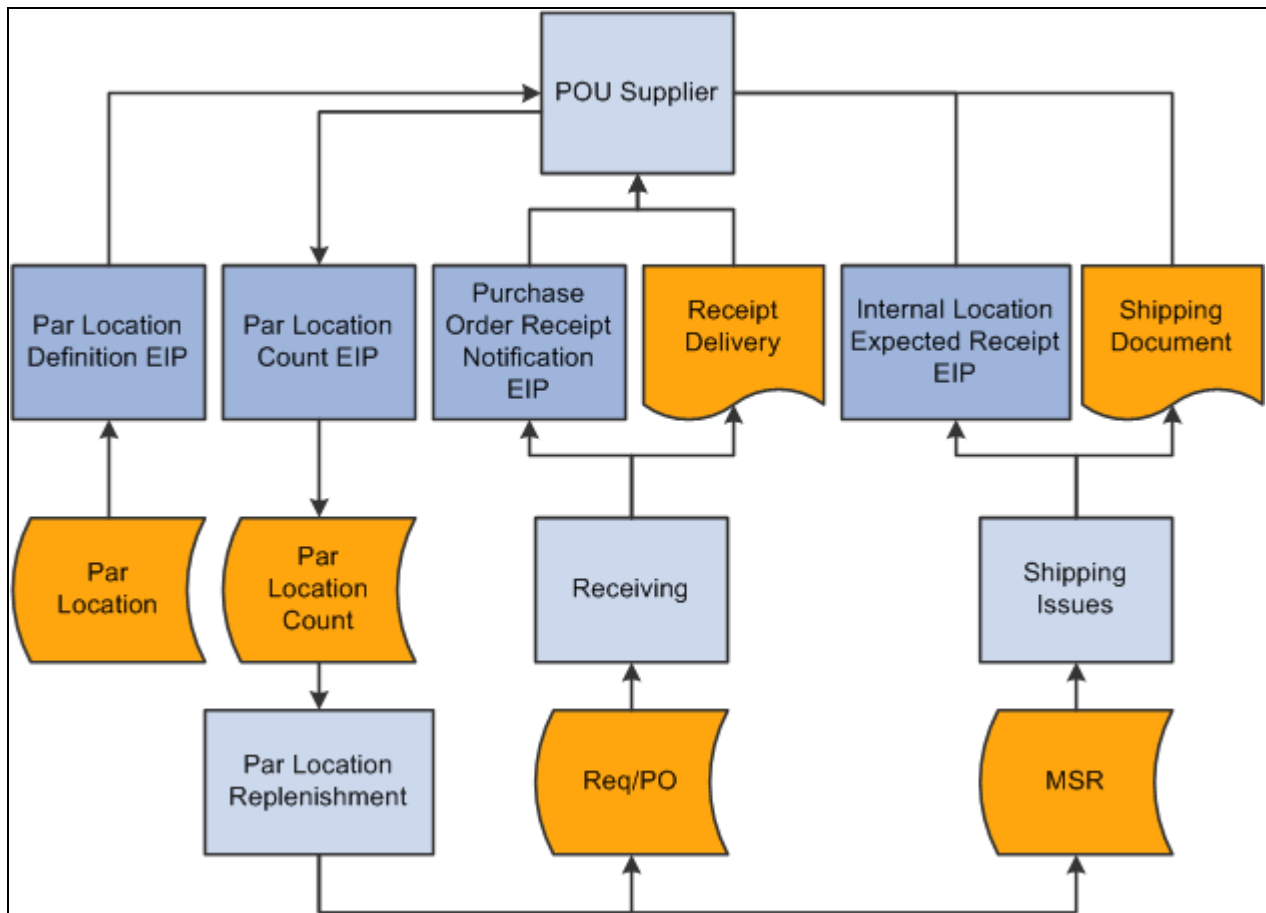

POU supplier integration with a PeopleSoft system

See Also

Chapter 6, "Integrating With a Third-Party Point-of-Use Supplier System," Defining Par Location Data for the POU Supplier and the PeopleSoft System, page 132

Chapter 2, "Understanding PeopleSoft Supply Chain Management Enterprise Integration Points," page 7

<https://support.oracle.com/CSP/ui/flash.html>

Managing Subscription Errors for POU EIPs

Error management is integral to the effectiveness of inbound EIPs in the PeopleSoft system. In the process of uploading data transactions, the PeopleSoft subscription process detects any data errors and stores them in queues or staging tables for manual correction in the PeopleSoft system before updating any core PeopleSoft application tables.

Each of the inbound EIPs facilitating the subscription of transactions from third-party applications has its own transaction code that must be entered on an assigned data management page to access the EIP's specific error-correction page.

The Par Location Count EIP, which is used in both surgical resource system and POU supplier system integrations, uses the transaction code *Par Loc*, which is entered on the Transaction Maintenance page. You use the Transaction Maintenance page to access error-correction pages for transactional data.

See Also

Chapter 2, "Understanding PeopleSoft Supply Chain Management Enterprise Integration Points," page 7

Chapter 7

Integrating With a Third-Party Surgical Resource Software Application

This chapter provides an overview of surgical resource software (SRS) applications and discusses how to:

- Define assumptions of an SRS application integration.
- Define items and par locations for an SRS application integration.
- Use chunking to streamline your SRS application integration processes.
- Create RTVs for surgical resource par location items.
- Implement an SRS application integration.
- Use SRS application EIPs.
- Manage errors for SRS EIPs.

Understanding SRS Applications

SRS applications:

- Manage a variety of medical resources.
- Ensure that proper medical supplies are available at surgical facilities when needed.
- Handle scheduling to ensure that physicians and supporting staff are available at the correct place and time to perform surgical procedures.

Defining Assumptions of an SRS Application Integration

The SRS application integration is based on the following assumptions:

- Because patient usage is recorded in the SRS application and not in PeopleSoft Inventory, the material usage and reconciliation feature in PeopleSoft Inventory should not be used.

Any reconciliation procedures must be performed in the SRS application.

- You set up dual feeds if you use an SRS application in some surgical resource locations and PeopleSoft Inventory par locations in others, and you use the patient usage feature in PeopleSoft.

Set up the two feeds from the admissions, discharges, and transfers and patient billing systems, one to the PeopleSoft system and one to the SRS application.

- All par locations, whether integrated with an SRS application or not, are replenished using the PeopleSoft Inventory Create Par Replenishment Requests process (INPGCDMD).

See Also

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Managing Par Inventory," Replenishing Par Locations

Defining Items and Par Locations for an SRS Application Integration

All item and par location data is set up and maintained in the PeopleSoft system. However, a successful integration with an SRS application depends on understanding how the SRS application uses the fields that you define in the PeopleSoft system.

A charge code and usage tracking method (charge type) are required fields for every par location item that is used with an SRS application. Because the SRS application passes patient usage directly to a patient billing system, these two pieces of information are vital. Both of these fields are a part of the par location definition created in the Par Location Definition component, and they are included in the par location EIP transactions that PeopleSoft Inventory sends to the SRS application.

When you define a par location in PeopleSoft Inventory, the par location ID appears by default in the location field. For the SRS application integration, it is imperative that you do not overwrite this default value. When direct purchase requests are passed to PeopleSoft Purchasing through the Purchase Order Requisition EIP (PURCHASE_REQUISITION_LOAD service operation), the par location ID is used as the location.

See Also

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Tracking Material Usage"

Using Chunking to Streamline SRS Application Integration Processes

You can use PeopleSoft chunking methodology to reduce the volume of outbound data sent by the EIP. Chunking enables you to segment the data by business unit and location or par location and to define which nodes receive the specific information. This functionality is useful if only some of the subscribing nodes need to receive the data published by all departments. For example, you can set up your processes so that business units and locations that exist as subscribers in third-party systems receive only the data that are specifically published for them according to the chunking rules and node maps that you implement.

See Also

Enterprise PeopleTools 8.50 PeopleBook: Integration Broker

[Chapter 3, "Implementing Integrations," Setting Up Chunking, page 75](#)

Creating RTVs for Surgical Resource Par Location Items

A PeopleSoft Purchasing return to vendor (RTV) should be created if an incorrect item is delivered for replenishing a surgical resource par location. This mistake is usually discovered at the main loading dock of the healthcare facility. However, if the item has already been received into PeopleSoft Purchasing, a transaction will have already been published by the EIP to the SRS application. In this case, the surgical resource par location never receives the shipment and the system never fills the transaction from the PO Receipt Notification EIP issued for that item.

For technical details about individual EIPs, use the Interactive Services Repository (ISR) in the My Oracle Support website located at <https://support.oracle.com/CSP/ui/flash.html>.

See Also

PeopleSoft Enterprise Purchasing 9.1 PeopleBook, "Managing Vendor Returns"

Implementing an SRS Application Integration

This section discusses how to:

- Define par location data for the SRS application and the PeopleSoft system.
- Stock case carts from a surgical resource par location.
- Maintain item replenishment data in the SRS application and the PeopleSoft system.
- Restock a surgical resource par location.

Defining Par Location Data for the SRS Application and the PeopleSoft System

This section describes the procedures and application functions used to maintain par location data in PeopleSoft Inventory and the SRS application.

To maintain par location data in PeopleSoft and the SRS application:

1. Create surgical resource par locations in PeopleSoft Inventory.

Define the operating room resource locations as par locations in PeopleSoft Inventory using the Par Location Definition component. All item and par location data is set up and maintained in the PeopleSoft system.

2. Run the Full Data Publish process to initially populate the SRS application with item data.

Use the Full Data Publish process to publish a full-data replication of the par locations for the initial implementation using the PAR_LOCATION_FULL_SYNC service operation (EIP) in PeopleSoft Integration Broker. This process should be run once the par locations are defined. You use this service operation to initially populate the SRS application with par location item data.

3. Save changes to the Par Location Definition component to update the SRS application.

All subsequent changes saved to the Par Location Definition component for existing par locations are sent to the SRS application in partial-data replication EIP (PAR_LOCATION_SYNC service operation) using the Par Location Definition EIP. These partial-data replications are published when saving the Par Location Definition component to keep the SRS application current with ongoing PeopleSoft Inventory par location definition and item changes.

See Also

Chapter 2, "Understanding PeopleSoft Supply Chain Management Enterprise Integration Points," page 7

Stocking Case Carts From a Surgical Resource Par Location

This section describes the tasks performed to stock a case cart in an integration of a PeopleSoft system and a third-party SRS application.

To stock a case cart for a procedure:

1. Schedule the surgical procedure in the SRS application.

Typically, the operating room (OR) nurse or assistant schedules a procedure in the SRS application and defines a case cart of the required supplies for the procedure by using the preference cards defined for a physician or surgeon.

2. Run the material requisition process in the SRS application to source supplies required for upcoming procedures in PeopleSoft.

Several days before the procedure, a materials requisition process in the SRS application identifies all of the items needed for the procedure. For the required items with on-hand quantity below par, the SRS application publishes data containing the required quantities needed for the procedure.

PeopleSoft Purchasing subscribes to this data using the Purchase Order Requisition EIP. This service operation provides the PeopleSoft system with the information to enable the direct purchase of miscellaneous items needed for a particular procedure. This information includes the item ID, requested quantity, unit of measure, location (that is, the SRS storage location and PeopleSoft par location), due date (the procedure date), and case ID. The case ID is for trace purposes, and it is stored in the Description field (DESCR254) in the Comments table (PO_RQLD_CMT_SEG) in the EIP.

The data is inserted into the PeopleSoft Purchasing requisition staging tables (PO_REQLOAD_RQST and PO_REQLOAD_CMT). The Purchasing Requisition Loader process (PO_REQLOAD) picks up the staged requisitions and inserts those with no data errors into the PeopleSoft Purchasing requisition tables for sourcing.

If the Purchasing Requisition Loader process discovers errors in the data (such as data type inconsistency), the entire transaction is rejected. If there are application errors, the data is inserted and you can use the error-correction page to correct the data.

Requests for non-stock items that have been staged to the PeopleSoft system are designated as processed in the SRS application. If the material requisitioning process is run again before the procedure is performed, requisitions for items below par are not duplicated. However, if additional quantities of requested items are required or if new items are needed, a new requisition transaction is published and staged to PeopleSoft Purchasing.

If the original requisition quantity is decreased or canceled in the SRS application, the OR nurse or assistant can produce a cancellation report using the SRS application. This report identifying the canceled stock quantities can be sent to the materials management director, who can manually update the PeopleSoft system with the required changes. This might include canceling a requisition or modifying the requested quantity. If the vendor has already shipped the order or if the order has been received, it might require a return-to-vendor transaction.

To facilitate finding the purchase order associated with the procedure that was canceled, the case ID is passed on in the data exchanged in the Purchase Order Requisition EIP.

Based on setID, vendor priority, and item attributes, PeopleSoft Purchasing sources the requested item using the PeopleSoft Purchasing distribution network, and it creates purchase orders for stockless items as well as material stock requests in PeopleSoft Inventory for stock items if the stock is available.

3. Receive and deliver the requested stock quantities to the surgical resource location.

Non-stock and stockless items are received using components in PeopleSoft Purchasing and delivered to the surgical resource location that generated the request for the item. Stock items are issued to the surgical resource par location from PeopleSoft Inventory.

4. At the surgical resource location, pick materials required for the case cart.

The day before the procedure, the OR nurse or assistant generates a pick list using the SRS application. The pick list is used at the surgical resource par location to retrieve the materials required to stock the case cart for the procedure.

Depending on internal rules and regulations, material that is not consumed from the case cart can be returned to the surgical resource par location, where it can be picked for another procedure.

For technical details about individual EIPs, use the Interactive Services Repository (ISR) in the My Oracle Support website located at <https://support.oracle.com/CSP/ui/flash.html>.

See Also

Chapter 2, "Understanding PeopleSoft Supply Chain Management Enterprise Integration Points," page 7

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Changing, Canceling, and Holding Orders"

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Creating Orders for Fulfillment," Creating Online Orders Using Express Issue in PeopleSoft Inventory

Maintaining Item Replenishment Data in the SRS Application and the PeopleSoft System

Here's how to manage item replenishment data in the SRS application and the PeopleSoft system:

1. Use the SRS application to track material usage and on-hand quantity adjustments for the surgical resource par location.

After a procedure, the OR nurse or assistant records consumer material usage in the SRS application and adjusts par on-hand quantities for applicable surgical resource par locations.

2. Use the SRS application to publish on-hand par location count data to PeopleSoft Inventory using the Par Location Count EIP.

This publish occurs at user-requested intervals from the SRS application to provide the PeopleSoft system with current on-hand quantities for each item in the surgical resource par locations.

3. Use PeopleSoft Inventory to subscribe to the on-hand par location count data from the SRS application.

PeopleSoft Inventory subscribes to this data using the Par Location Count EIP. Once the data is received, the PeopleSoft system updates the par location count tables and the par location count information is ready to be processed using the Create Par Replenishment Requests process.

Note. Any existing SRS application-based replenishment processes are not used in this integration.

4. Run the Create Par Replenishment Requests process in PeopleSoft Inventory.

The Create Par Replenishment Requests process takes each par location count and replenishes those items that fall below the par level identified for the item on the Par Location Definition - Line page. A purchase order, requisition, or material stock request is created in the PeopleSoft system to replenish the stock to par levels.

5. Deplete the material stock requests created to replenish a surgical resource par location.

For material stock requests that have issued stock from inventory to the par location and have been depleted, the Internal Location Expected Receipt EIP publishes a transaction to the SRS application by using the IN_PUB_MSG Application Engine process.

6. Receive direct-purchase items with the PeopleSoft Purchasing Receiving component.

Receiving material against a purchase order in the PeopleSoft Purchasing Receiving component triggers the publication of a transaction to the SRS application using the Purchase Order Receipt Notification EIP. This service operation identifies all direct-purchase items and quantities that have been received and are delivered to specified locations. The Receipt Push process (RECV PUSH) loads the stage table (RECV_PUSH_NTFY). If a chunking rule for the service operation and publish rule exists in the publish rule definition table (EO_MSGPUBDEFN), then the system creates staging records for only those par location receipt transactions that have the par location defined in the Par Location Chunking table (IN_BU_PAR_EOC). If a chunking rule does not exist, then staging records are created for all par location receipt transactions. Once the stage table is loaded, it calls the program that in turn publishes the receipt notification data.

For technical details about individual EIPs, use the Interactive Services Repository (ISR) in the My Oracle Support website located at <https://support.oracle.com/CSP/ui/flash.html>.

See Also

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Managing Par Inventory," Replenishing Par Locations Chapter 2, "Understanding PeopleSoft Supply Chain Management Enterprise Integration Points," page 7

Restocking a Surgical Resource Par Location

This section describes the typical procedure used to physically restock a surgical resource par location.

To physically restock a surgical resource par location:

1. Generate the appropriate reports for the material being restocked at the surgical resource par location.

For item issues out of inventory, the IN Shipping Document (inventory shipping document) report (INC6503) can be requested to accompany the delivery of the stock items to the surgical resource par location. For purchased items, a Receiver Delivery report (POY5030) can be generated to accompany the stockless and non-stock items to the par location. This report, along with the service operation acknowledgment of the items sent, ensures that the par locations are updated with the correct quantities.

2. Compare expected receipts against actual receipts and record discrepancies.

When restocking a surgical resource location, verify that the quantity delivered to the location is the same as the quantity expected. If the actual quantity received is different from the expected quantity, record the variation on the report.

3. Manually restock the surgical resource par location's bin or compartment with the received stock.

Refill the bins or compartments in the surgical resource location with the received stock.

4. Complete the restocking event in the SRS application.

The final step of the restocking event takes place in the third-party SRS application. Typically, the person restocking the surgical resource par location updates the SRS application with the actual received quantities that are used to restock the bins or compartments in the surgical resource par location.


Using SRS Application EIPs

Five EIPs are used to exchange data between PeopleSoft Inventory and an SRS application. This section discusses the data flow and provides cross-references to information about the functional role and features of the following EIPs:

- Par Location EIP (outbound).
- Par Location Count EIP (inbound).
- Purchase Order Requisition EIP (inbound).
- Internal Location Expected Receipt EIP (outbound).
- Purchase Order Receipt Notification EIP (outbound).

Data Flow Between the PeopleSoft System and the SRS Application

The following diagram illustrates the data flow between an SRS application and PeopleSoft, including integration for par location counts, receipts, requisitions, and internal location expected receipts:

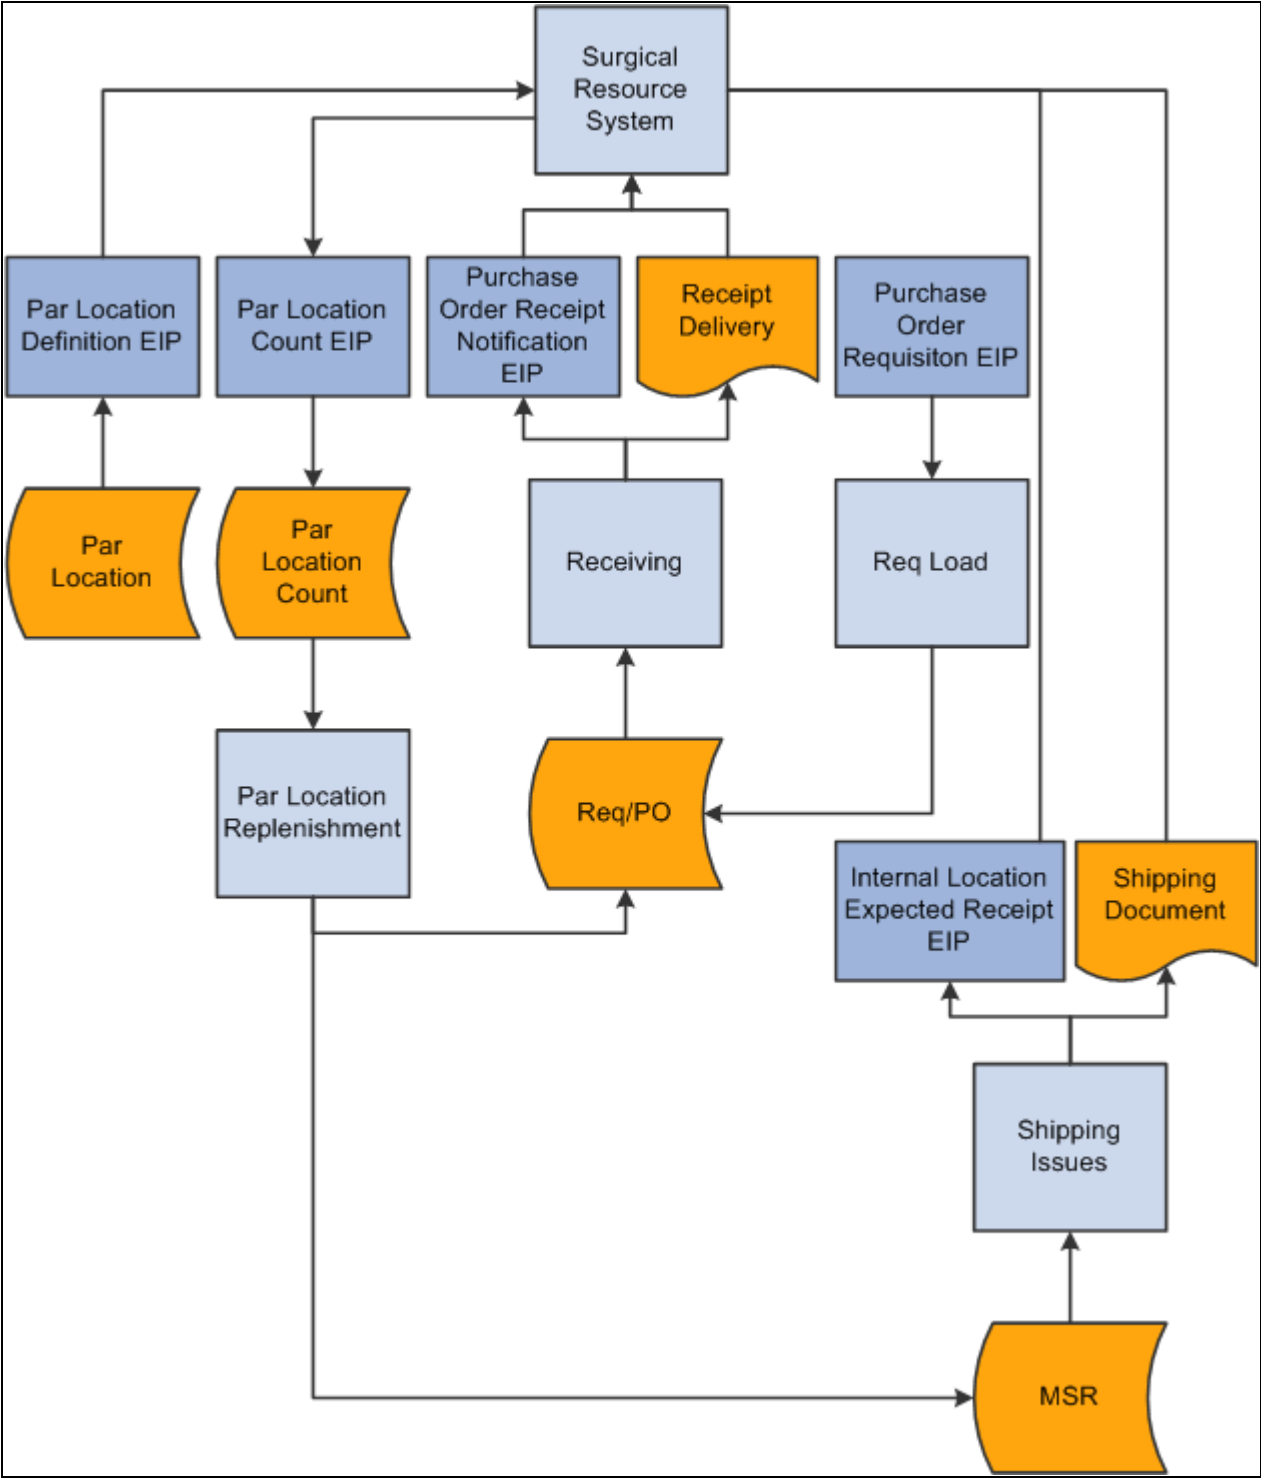

SRS application integration with a PeopleSoft system

SRS Application EIPs

This table provides cross-references to information about the functional role and features of the SRS service operations in PeopleSoft Integration Broker.

Enterprise Integration Point	Reference
Par Location EIP (Outbound)	See Chapter 7, "Integrating With a Third-Party Surgical Resource Software Application," Implementing an SRS Application Integration, page 141.
Par Location Count EIP (Inbound)	See Chapter 7, "Integrating With a Third-Party Surgical Resource Software Application," Implementing an SRS Application Integration, page 141.
Purchase Order Requisition EIP (Inbound)	See Chapter 7, "Integrating With a Third-Party Surgical Resource Software Application," Implementing an SRS Application Integration, page 141.
Internal Location Expected Receipt EIP (Outbound)	See Chapter 7, "Integrating With a Third-Party Surgical Resource Software Application," Implementing an SRS Application Integration, page 141.
Purchase Order Receipt Notification EIP (Outbound)	See Chapter 7, "Integrating With a Third-Party Surgical Resource Software Application," Implementing an SRS Application Integration, page 141.

For technical details about individual EIPs, use the Interactive Services Repository (ISR) in the My Oracle Support website located at <https://support.oracle.com/CSP/ui/flash.html>.

See Also

[Chapter 2, "Understanding PeopleSoft Supply Chain Management Enterprise Integration Points," page 7](#)

Managing Errors for SRS EIPs

Error management is an integral part of the effectiveness of the PeopleSoft system of inbound EIPs. In the process of uploading data, the PeopleSoft subscription process detects any data errors and stores them in queues or staging tables for manual correction in the PeopleSoft system before updating any core PeopleSoft application tables.

Each inbound EIP that handles subscription of data from third-party applications has a respective transaction code that must be entered on an assigned data management page. The data management page allows access to the EIP's specific error correction page.

The Par Location Count EIP, which is used in both the SRS and point-of-use (POU) supplier system integrations, uses the transaction code *Par Loc*, which is entered on the Transaction Maintenance page. The Transaction Maintenance page is used to access error-correction pages for transactional data.

The Purchase Order Requisition EIP, which is used in the SRS integration, uses the transaction code *REQLOAD*, which is entered on the Data Definition Maintenance page. The Data Definition Maintenance page is used to access error-correction pages for definitional data.

See Also

Chapter 2, "Understanding PeopleSoft Supply Chain Management Enterprise Integration Points," page 7

Part 4

Integrating to Electronic Data Collection Systems

Chapter 8

Designing an Electronic Data Collection System

Chapter 9

Using an Electronic Data Collection System

Chapter 10

Understanding Record Layouts for the Electronic Data Collection System

Chapter 8

Designing an Electronic Data Collection System

This chapter provides an overview of electronic data collection and discusses how to:

- Set up electronic data collection defaults.
- Set up labels.
- Set up the Uniform Code Council/European Article Numbering (UCC/EAN) manufacturer ID.
- Set up the wedge command code.
- Set up unit of measure.
- Set up picking.
- Set up putaway.

Understanding Electronic Data Collection

Electronic data collection offers many advantages. It enables you to:

- Increase the accuracy of data entry.
- Decrease the amount of time spent on data entry.
- Improve productivity.
- Save cost.

PeopleSoft applications use electronic data collection for key material movement transactions and support for bar code printing on standard reports and labels. You can use the electronic data collection components to capture data from multiple sources, such as bar code devices, external feeds, and direct data entry.

Bar code-enabled material movement transactions are based on an open architecture so that you can select the data collection solution for use with PeopleSoft applications. With this architecture, third-party or in-house data collection hardware and software can feed transactions originating from data collection devices into the PeopleSoft system using a common, predefined interface.

See Also

[Chapter 9, "Using an Electronic Data Collection System," page 157](#)

Setting Up Electronic Data Collection Defaults

To use an electronic data collection system with PeopleSoft applications, you must first set up system default information.

See [Chapter 3, "Implementing Integrations," Setting Up Electronic Data Collections Defaults, page 78.](#)

Setting Up Labels

To set up labels for data collection, use the Data Collection Label Setup (BCT_LABEL_FS_GBL) component. You must first select a label type to access the Data Collection Label Setup page. For example, you might select Container ID Label as the label type to identify containers at storage locations.

This section discusses how to set up data collection labels.

See Also

[Chapter 9, "Using an Electronic Data Collection System," Generating Labels, page 163](#)

Page Used to Set Up Labels

<i>Page Name</i>	<i>Definition Name</i>	<i>Navigation</i>	<i>Usage</i>
Data Collection Label Setup	BCT_LABEL_FS	SCM Integrations, Barcode Labels, Setup Data Collection Labels, Data Collection Label Setup	At the SetID level, identify valid label formats that may be required when interfacing with a third-party label printing application.

Setting Up Data Collection Labels

Access the Data Collection Label Setup page (SCM Integrations, Barcode Labels, Setup Data Collection Labels, Data Collection Label Setup).

Format ID	Enter an ID for a unique label design. A label type can have many format IDs. However, a format ID is not required. If the label printing application does not require a format ID, use this page to define the prefix and suffix for the file name of the label extract file. The format ID can be anything that you choose. If the label printing application does not require a format ID in the extract file, then the format ID is for your reference only. If the label printing application does require a format ID in the extract file, you would enter the format ID that the application uses and select the Include Format check box. The file name has an xxxyyyyyzzzz format, where xxx is the file prefix, yyyyyy is the last five characters of the process instance ID, and zzzz is the file suffix. For example, if the file prefix is <i>GEN</i> and the suffix is <i>.LBL</i>, then the flat file generated by process instance 12345 would be named GEN12345.LBL.
Default	Select to set a format ID as the default that appears on the Label Generation page. If you do not select a default format ID, the first format ID listed becomes the default.
File Prefix	Enter the prefix for the file name of flat files generated for printing labels. This is an optional field
File Suffix	Enter the suffix for the file name of any flat files generated for printing labels. If you want a period as part of the suffix, you must include it in the field. This is an optional field.
Include Format	If this check box is selected, the format ID is inserted as the first field on every row in the label extract file.

Setting Up the UCC/EAN Manufacturer ID

To identify a manufacturer ID and starting container number, use the UCC/EAN Manufacturer component. You need to specify the manufacturer ID and starting container number for the label printing application in order to create a standard bar code accessible to all companies in the trading chain.

This section discusses how to specify the manufacturing ID.

Pages Used to Set Up the UCC/EAN Manufacturer ID

<i>Page Name</i>	<i>Definition Name</i>	<i>Navigation</i>	<i>Usage</i>
UCC/EAN Manufacturer ID	BCT_MFGID_SETUP	SCM Integrations, Barcode Labels, Setup UCC/EAN Manufacturer ID, UCC/EAN Manufacturer ID	Specify the manufacturer ID and starting container number.

Specifying the Manufacturer ID

Access the UCC/EAN Manufacturer ID page (SCM Integrations, Barcode Labels, Setup UCC/EAN Manufacturer ID, UCC/EAN Manufacturer ID).

Manufacturer ID	Enter an ID that is included in the extract file for the shipping container labels so that it can be formatted by the label printing software to create an industry-standard bar code label.
Shipping Container Serial ID	Enter an ID to uniquely identify the shipping container. Enter the starting container number, with up to nine digits, or leave it blank to start at 1. The shipping container serial ID is included in the extract file for the shipping container labels so that it can be formatted by the label printing software to create an industry-standard bar code label.

Setting Up the Wedge Command Code

To set up wedge command codes use the Set Up Wedge Command Code component.

See *PeopleSoft Enterprise Inventory 9.1 PeopleBook*, "Packing Orders for Shipment," Using Wedge Commands in Packing Sessions.

Setting Up Unit of Measure

To associate items with units of measure use the Define Item component.

See *PeopleSoft Enterprise Managing Items 9.1 PeopleBook*, "Working with Items," Using Units of Measure.

Setting Up Picking

To set up picking use the Setup Fulfillment component.

See *PeopleSoft Enterprise Inventory 9.1 PeopleBook*, "Setting Up Fulfillment at the Business Unit and Item Levels," Defining Business Unit Fulfillment Options.

Setting Up Putaway

To set up the Putaway Plan Report use the Putaway Plan Report component.

See *PeopleSoft Enterprise Inventory 9.1 PeopleBook*, "Receiving and Putting Away Stock," Generating the Putaway Plan Report.

Chapter 9

Using an Electronic Data Collection System

This chapter provides an overview of electronic data collection and discusses how to:

- Use electronic data collection transactions.
- Use background transaction processes.
- Purge transactions.
- Generate labels.
- Manage files.

Understanding Electronic Data Collection


Electronic data collection enables you to:

- Increase the accuracy of data entry.
- Decrease the amount of time spent on data entry.

You can use the electronic data collection components to capture data from:

- Bar code devices.
- External feeds.
- Direct data entry.

The following diagram shows the data flow for electronic data collection. Data from flat files or XML messages are placed in the inbound staging tables by the PeopleSoft Integration Broker system. Online or batch applications can also place data directly into the inbound staging tables. Background processes apply the data to the PeopleSoft production tables. Any errors are handles by the Transaction Maintenance component. The Purge process will delete all transactions with a status of *Complete* or *Confirmed* from the transaction log:

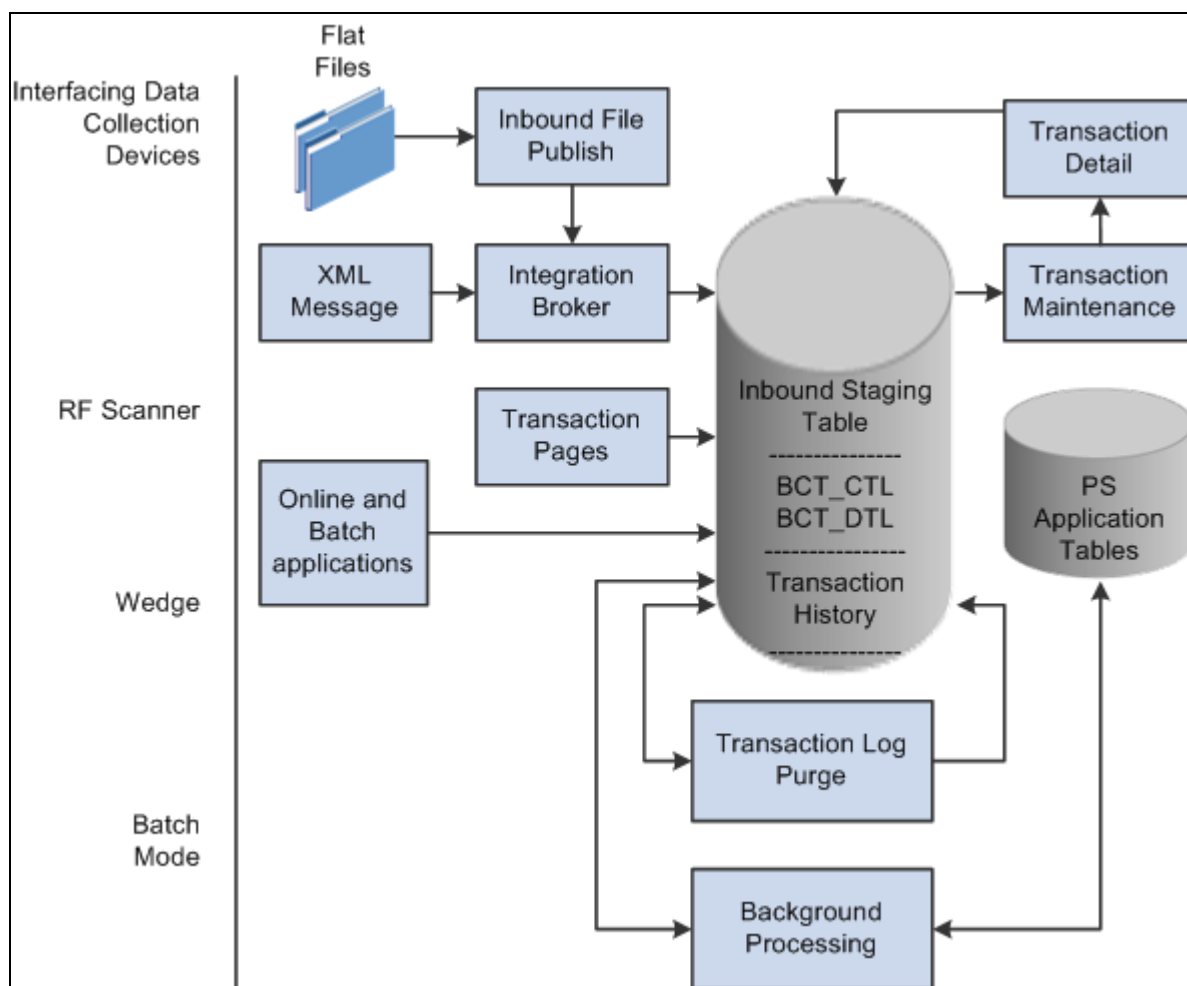

Electronic data collection data flow

See Also

[Chapter 4, "Processing Enterprise Integration Points \(EIPs\)," Using Transaction Maintenance, page 92](#)

[Chapter 9, "Using an Electronic Data Collection System," Purging Transactions, page 163](#)

Device Selection

The first step in designing an electronic data collection system is to select the data collection devices you will use to process bar code material movement transactions. PeopleSoft provides support for three bar code technologies:

Radio Frequency

Radio frequency (RF) systems are used when immediate access to the database is required. This technology requires RF terminals and controllers. RF data collection applications, developed in-house or by third-party vendors, produce transactions that are passed to the PeopleSoft applications through PeopleSoft Integration Broker using XML messages.

Batch

Batch systems are used when real-time updates are not needed. Batch-oriented data collection applications, developed in-house or by a third-party vendor, produce transactions that are collected in an ASCII text file. The text file is loaded into the PeopleSoft system using the Inbound File Publish utility.

Keyboard Wedge

Keyboard wedges can be used when the person collecting the bar-coded information has access to a workstation running the PeopleSoft application. A wand or a laser gun connects to the keyboard wedge that inputs the bar-coded information directly into the transaction pages. The computer interprets information entered using the keyboard wedge in the same manner as information entered using the keyboard.

See Also

[Chapter 4, "Processing Enterprise Integration Points \(EIPs\)," Processing Inbound EIPs, page 91](#)

Using Electronic Data Collection Transactions

Data collection transactions received through XML messages, batch oriented flat files, and the transaction pages are loaded into the transaction log. Background processes pick up these transactions, validate them, and then update the appropriate PeopleSoft application tables. If an error is found, the system does not process the transaction. The transaction's status on the transaction log is changed to *Error*, and the system inserts a row into the error table for each error message.

The BCt Errors Workflow process (IN_WFBCTERRS) checks for electronic data collection transactions that have an error status and generates a worklist entry. Once you process the worklist entry, the PeopleSoft system displays the Transaction Maintenance page, where you can view the errors and fix them.

Once you have modified the transaction and saved the Transaction Maintenance Detail page, the transaction can be reprocessed. Transactions that have been processed to the *Complete* status or that have been canceled in the Transaction Maintenance page can be archived and purged from the transaction log using the transaction purge process.

The background processes validate all information before performing any updates. However, when you enter the transactions through the data collection transaction pages, selected pieces of information on the page have edits to verify the data that is entered.

<i>Transactions</i>	<i>Reference</i>
Inventory Adjustments	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Making Stock Quantity Adjustments and Transfers Within the Business Unit."
Interunit Receiving	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Receiving and Putting Away Stock," Staging Interunit Transfers Using an Electronic Data Collection System.

Transactions	Reference
Inventory Picking	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Picking Inventory," Entering Picking Feedback Using an Electronic Data Collection System.
Inventory Putaway	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Receiving and Putting Away Stock," Entering Stockroom Feedback Using an Electronic Data Collection System.
Inventory Transfer	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Making Stock Quantity Adjustments and Transfers Within the Business Unit."
Kanban Transfers	See <i>PeopleSoft Enterprise Flow Production 9.1 PeopleBook</i> , "Using Replenishment Sources," Understanding the Kanban Transfer Process.
Ship Containers and Serial IDs	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Packing Orders for Shipment," Working with Shipping Containers and Shipping Serial IDs Using an Electronic Data Collection System.
Shipping Request	See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i> , "Shipping Inventory."
Production Picking	See <i>PeopleSoft Enterprise Manufacturing 9.1 PeopleBook</i> , "Issuing Material to Production," Processing Picking Plans Using Electronic Data Collection.
Kanban Replenishment Request	See <i>PeopleSoft Enterprise Flow Production 9.1 PeopleBook</i> , "Maintaining Kanban Cards and Replenishment Requests," Creating Replenishment Requests Using Electronic Data Collection.
Production Completions and Scrap	See <i>PeopleSoft Enterprise Manufacturing 9.1 PeopleBook</i> , "Recording Completions and Scrap Using Electronic Data Collection," Processing Electronic Data Collection Completions Transactions.
Production Multiple Outputs Completions and Scrap	See <i>PeopleSoft Enterprise Manufacturing 9.1 PeopleBook</i> , "Recording Completions and Scrap Using Electronic Data Collection," Processing Electronic Data Collection Completions Transactions.

Transactions	Reference
Kanban Completions	See <i>PeopleSoft Enterprise Flow Production 9.1 PeopleBook</i> , "Using Replenishment Sources," Processing Kanban Completions.
Production Kit Issues and Returns	See <i>PeopleSoft Enterprise Manufacturing 9.1 PeopleBook</i> , "Issuing Material to Production," Processing Kit Issues and Returns Using Electronic Data Collection.
Component Issues and Returns	See <i>PeopleSoft Enterprise Manufacturing 9.1 PeopleBook</i> , "Recording Completions and Scrap Using Electronic Data Collection," Editing or Issuing Components.
Actual Hours	See <i>PeopleSoft Enterprise Manufacturing 9.1 PeopleBook</i> , "Recording Completions and Scrap Using Electronic Data Collection," Recording Actual Machine and Labor Hours.
Purchasing Receiving	See <i>PeopleSoft Enterprise Purchasing 9.1 PeopleBook</i> , "Receiving Shipments," Receiving Items Using EDC.
Kanban Receiving	See <i>PeopleSoft Enterprise Flow Production 9.1 PeopleBook</i> , "Using Replenishment Sources," Using the Receive by Kanban ID Transaction.

For technical details about individual EIPs, use the Interactive Services Repository (ISR) in the My Oracle Support website located at <https://support.oracle.com/CSP/ui/flash.html>.

Using Background Transaction Processes

You set up electronic data collection background processes to scan the transaction log continuously as long as there are transactions in the log with the status *New* or *Reprocess*. If no transactions with the status *New* or *Reprocess* are in the log when a process scans the log, the process shuts down. If the process shuts down, you can restart it with PeopleSoft Process Scheduler. Because you can set up Process Scheduler to automatically restart the background processes at predefined intervals, transaction processing can occur continuously or at set periods throughout the day.

Transaction	Page Name	Process Name	Tables Accessed	Tables Updated
Inventory Adjustments	BCT_INV_REQIA DJ	INPVIADJ	BCT_INV_REQIA DJ	BCT_INV_REQIA DJ

Transaction	Page Name	Process Name	Tables Accessed	Tables Updated
Interunit Receiving	BCT_INV_REQIURV	INPJIURV	BCT_INV_REQIURV	BCT_INV_REQIURV
Inventory Picking and Shipping	BCT_INV_REQPICK	IN_FUL_PFB	BCT_INV_REQPICK	BCT_INV_REQPICK
Inventory Putaway	BCT_NV_REQPWF	INPZPTWY	BCT_NV_REQPWF	BCT_NV_REQPWF
Inventory Transfers	BCT_INV_REQTRFR	INPTTRFR	BCT_INV_REQTRFR	BCT_INV_REQTRFR
Physical Inventory	BCT_INV_REQPHYS	INPIPHYS	BCT_INV_REQPHYS	BCT_INV_REQPHYS
Ship Containers and Serial IDs	BCT_INV_REQSHPM	INPFSHPM	BCT_INV_REQSHPM	BCT_INV_REQSHPM
Shipping Request	BCT_INV_REQFUL	INV_FUL_BCT	RUN_CNTL_IN_FUL	RUN_CNTL_IN_FUL
Production Picking	BCT_MG_REQPIK	SFPEPICK	BCT_MG_REQPIK	BCT_MG_REQPIK
Kanban Replenishment Requests	BCT_MG_REQREPL	FPPAREPL	BCT_MG_REQREPL	BCT_MG_REQREPL
Production and Completions Scrap	BCT_MG_REQCOMP	SFPDCDRV	BCT_MG_REQCOMP	BCT_MG_REQCOMP
Kit Issues and Returns	BCT_MG_REQMISC	SFPFMISC	BCT_MG_REQMISC	BCT_MG_REQMISC
Actual Hours	BCT_MG_REQACT	SFPGACTH	BCT_MG_REQACT	BCT_MG_REQACT
Load Purchase Order Receipts	RUN_RECVLOAD	PO_RECVLOAD	RUN_CNTL_RECVLD	RUN_CNTL_RECVLD

See Also

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Making Stock Quantity Adjustments and Transfers Within the Business Unit"

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Packing Orders for Shipment," Working with Shipping Containers and Shipping Serial IDs Using an Electronic Data Collection System

PeopleSoft Enterprise Flow Production 9.1 PeopleBook, "Maintaining Kanban Cards and Replenishment Requests," Creating Replenishment Requests Using Electronic Data Collection

PeopleSoft Enterprise Manufacturing 9.1 PeopleBook, "Issuing Material to Production," Processing Picking Plans Using Electronic Data Collection

PeopleSoft Enterprise Manufacturing 9.1 PeopleBook, "Recording Completions and Scrap Using Electronic Data Collection," Processing Electronic Data Collection Completions Transactions

PeopleSoft Enterprise Manufacturing 9.1 PeopleBook, "Issuing Material to Production," Processing Kit Issues and Returns

PeopleSoft Enterprise Manufacturing 9.1 PeopleBook, "Recording Completions and Scrap Using Electronic Data Collection," Running the Actual Hours Data Collection COBOL/SQL Process

Purging Transactions

You can periodically purge data collection transactions. The data collection architecture uses the standard purge process for PeopleSoft Supply Chain Management inbound transactions.

See Also

[Chapter 4, "Processing Enterprise Integration Points \(EIPs\)," Purging Transactions, page 96](#)

Generating Labels

To generate bar code labels, you must first set up the attributes for each label type on the Label Setup page. Next, you generate a flat file containing the label data by running a PeopleSoft Process Scheduler Structured Query Report (SQR) program from the label-specific run control page. Use the Generate Labels component to create this flat file. Finally, you pass the flat file to an in-house or a third-party bar code label product to print the labels.

The PeopleSoft system can print 10 types of labels:

Purchasing Receipt labels

Use these labels to track items that are received by the business unit. Receiving labels are generated for each item on a receipt. To print these labels, you must have PeopleSoft Purchasing installed.

Production Completion labels	Apply these labels to items that have been manufactured. To print these labels, you must have PeopleSoft Enterprise Manufacturing installed.
Pull Ticket labels	Use these labels to track material replenished from online replenishment requests. To print these labels, you must have PeopleSoft Flow Production installed.
Kanban Card labels	Use these labels to track material replenished by Kanban Card. To print these labels, you must have PeopleSoft Flow Production installed.
Storage Location labels	Use these labels on storage locations, such as aisles, rows, and bins, in a business unit. To print these labels, you must have PeopleSoft Inventory installed.
Item Storage labels	Use these labels to identify items in a carton or storage location. To print these labels, you must have PeopleSoft Inventory installed.
Storage Container labels	Use these labels to identify storage containers at a storage locations. To print these labels, you must have PeopleSoft Inventory installed.
Shipping Carton labels	Apply these labels to each carton before shipping to provide shipping information to shipping personnel and carriers. You can also use them to build shipping containers, and to provide customer-specific information that identifies items within the cartons. To print these labels, you must have PeopleSoft Inventory installed.
Shipping Serial labels	Use these labels to identify a serial ID assigned to items at the time the items are shipped. To print these labels, you must have PeopleSoft Inventory installed.
Shipping Container labels	Use these labels to identify shipping containers. Shipping container labels can be used to provide shipping information to shipping personnel, carriers, and customers. To print these labels, you must have PeopleSoft Inventory installed.
Item Usage labels	Use these labels to identify medical supplies used for patients. To print these labels, you must have PeopleSoft Inventory installed.

See Also

[Chapter 8, "Designing an Electronic Data Collection System," Setting Up Labels, page 154](#)

Managing Files

This section discusses how you work with files when generating labels.

Override File

To specify a file directory and file name for the extraction file, select the Override File check box, and enter the file directory and file name. Leave the Override File check box clear to create the extraction file in the default directory with the default file name.

File Directory

Enter a directory path for the label file.

If you do not select the Override File check box, on any label except the Carton Label, the directory is selected according to the following hierarchy:

1. The directory name is the FILEPREFIX that was specified in SETENV.SQC during the initial system setup.

For information on setting the FILEPREFIX in the SETENV.SQC, refer to the *PeopleTools Installation and Administration* for the platform.

2. If no FILEPREFIX was specified during system setup, the directory name is by default the current work directory on the server running the label program.

File Name

Enter a file name for the label file.

If you do not select the Override File check box, on any label except the carton label, the file is named according to the following hierarchy:

1. The file name is the file prefix that is defined for the format ID (on the Data Collection Label Setup page in the Generate Labels window) combined with the last five digits of the process ID; the file name suffix is the file suffix defined for the format ID.
2. If no format ID is specified on the Data Collection Label Setup page, the last five digits of the process ID are used as the file name, and the file name suffix is the file suffix defined on the Data Collection Setup page in Process Transactions.
3. If no file suffix is defined on the Data Collection Setup page, the last five digits of the process ID are used as the file name, and the file name suffix is the FILESUFFIX that you specified in SETENV.SQC when you initially set up the system.

For information on setting the FILESUFFIX in the SETENV.SQC, refer to the installation documentation.

4. If no file suffix was specified in SETENV.SQC when you initially set up the system, the last five digits of the process ID are used as the file name, and no suffix is appended.

The following table indicates the sequence of defaults that the system uses when assigning file names:

<i>File Prefix</i>	<i>File Name</i>	<i>File Suffix</i>
Override	Override	Override

<i>File Prefix</i>	<i>File Name</i>	<i>File Suffix</i>
From format ID specified on the Data Collection Label Setup page.	The last five digits of the process ID. If multiple requests can be entered on the label request page, then an additional two-digit sequential number starting with 01 is appended to the end of the file name.	From format ID specified on the Data Collection Label Setup page.
None	The last five digits of the process ID. If multiple requests can be entered on the label request page, then an additional two-digit sequential number starting with 01 is appended to the end of the file name.	The file suffix defined on the Data Collection Setup page.
None	The last five digits of the process ID. If multiple requests can be entered on the label request page, then an additional two-digit sequential number starting with 01 is appended to the end of the file name.	The FILESUFFIX that you specified in SETENV.SQC.
None	The last five digits of the process ID. If multiple requests can be entered on the label request page, then an additional two-digit sequential number starting with 01 is appended to the end of the file name.	None.

See Also

[Chapter 8, "Designing an Electronic Data Collection System," Setting Up Labels, page 154](#)

[Chapter 9, "Using an Electronic Data Collection System," Printing Shipping Carton Labels, page 177](#)

Common Elements Used in This Section

Language Select a language for the legible portion of the labels.

Business Unit or Unit Select the unit for which to print labels.

Format ID Enter a label format ID. Label formats are defined on the Data Collection Label Setup page. If you set up a default label format, its ID appears in this field.

Copies

Enter the number of copies of each label to print. When printing serial or sequential labels, if you increase the number in this field, the system multiplies the number of labels that you print. For example, if you are printing six labels in a sequence, and the number of copies is 1, then six labels print. However, if the number of copies is 2, then two copies of each label print, for a total of 12 labels.

Pages Used to Print Labels

<i>Page Name</i>	<i>Definition Name</i>	<i>Navigation</i>	<i>Usage</i>
Purchasing Receipt Labels	RUN_PO_RECEIPT	- SCM Integrations, Barcode Labels, PO Receipt Label, PO Receipt Labels - Purchasing, Receipts, Reports, Receipt Labels, PO Receipt Labels - Purchasing, Receipts, Process Receipts	If you have PeopleSoft Purchasing installed, select the process request parameters for purchasing receipt labels. Purchasing receipt labels are used to track items that are received by the business unit. Receiving labels can be generated for each item on a receipt.
Completion Label - Production Select	RUN_SFS7004	SCM Integrations, Barcode Labels, Completion Label, Production Select	Select the business unit for which to print labels. You can also indicate whether printed labels are based on a production ID or production schedule.
Completion Label - Completion Labels	RUN_SFS7004B	SCM Integrations, Barcode Labels, Completion Label, Completion Labels	Select the number of labels to print.
Pull Ticket/Pull List Options	RUN_FPS6500	- Manufacturing Definitions, Kanban, Electronic Kanbans, Print Pull Ticket/Pull List, Pull Ticket/Pull List Options - SCM Integrations, Barcode Labels, Pull Ticket Label, Pull Ticket/Pull List Options	Indicate how you want to print pull tickets and pull lists.

Page Name	Definition Name	Navigation	Usage
Pull Ticket/Pull List Range	RUN_FPS6500A	- Manufacturing Definitions, Kanban, Electronic Kanbans, Print Pull Ticket/Pull List, Pull Ticket/Pull List Range - SCM Integrations, Barcode Labels, Pull Ticket Label, Pull Ticket/Pull List Range	Make the printing selection.
Print Kanban Card	RUN_FPS6510	- SCM Integrations, Barcode Labels, Kanban Card Label, Print Kanban Cards - Manufacturing Definitions, Kanban, Kanban Cards, Print Kanban Cards	Print Kanban Card labels.
Kanban Card Range	RUN_FPS6510A	- SCM Integrations, Barcode Labels, Kanban Card Label, Kanban Card Range - Manufacturing Definitions, Kanban, Kanban Cards, Print Kanban Cards, Kanban Card Range	Select the kanban card label range.
Storage Location Label	RUN_INS9025	SCM Integrations, Barcode Labels, Storage Location Label	Select the process request parameters for printing bar code labels for storage locations.
Item Storage Label	RUN_INS9010	SCM Integrations, Barcode Labels, Item Storage Label	Select the process request parameters for printing bar code labels for items in storage.
Storage Container Label	RUN_INS9015	SCM Integrations, Barcode Labels, Storage Container Label	Select the process request parameters for printing container labels for storage container IDs.
Shipping Carton Label	RUN_INS6025	SCM Integrations, Barcode Labels, Shipping Carton Label	Select the process request parameters for shipping carton labels. The shipping carton labels can be automatically printed during picking.

Page Name	Definition Name	Navigation	Usage
Shipping Serial Label	RUN_INS6035	SCM Integrations, Barcode Labels, Serial Label	Select the process request parameters for shipping serial labels. If you assign a shipping serial label ID at shipping time, you can track items after they have been shipped.
Shipping Container Label	RUN_INS6030	SCM Integrations, Barcode Labels, Shipping Container Label	Select the process request parameters for shipping container labels.
Item Usage Label page	RUN_INS6040	SCM Integrations, Barcode Labels, Item Usage Label	Select the process request parameters for item usage labels.

Printing Purchasing Receipt Labels

Access the Purchasing Receipt Labels page (SCM Integrations, Barcode Labels, PO Receipt Label, PO Receipt Labels).

To print all receiving labels staged by the user ID:

1. Select the Reprint Labels check box to reprint receiving labels.

The Business Unit, Receiver ID Number and Receiver Line Number fields will become available for entry if the Reprint Labels check box is selected.

2. Select the receiver ID number for which you want to reprint labels.
3. Enter the receiver line number for the item and quantity for which you want to reprint labels.

Process Type

SQR Report

Tables Accessed

BCT_LABEL_FS

BCT_SETUP_FS

RECV_RUN_CNTL

RECV_LABEL_TBL

SET_CNTRL_REC

SET_CNTRL_TREE

RECV_LN

RECV_LN_ASSET

BU_ITEMS_INV

Tables Updated

RECV_LABEL_TBL

Printing Completion Labels

Access the Completion Labels page (SCM Integrations, Barcode Labels, Completion Label).

To print completion labels by production ID or by production schedule:

1. To print completion labels by production ID, enter the production ID.
2. To print completions labels by production schedule, enter the production area and item ID.

If the item is revision controlled, select a revision code if the revision is required on the labels.

3. Once the process request parameters are entered, click the Search button to access the Completion Labels page.

Note. If the conversion rate between the standard unit of measure (UOM) and the standard pack UOM is not set up for this item, the page produces an error message, and the system does not display the Completion Labels page.

Tables Accessed

MASTER_ITEM_TBL

INV_ITEMS

BCT_LABEL_FS

BCT_SETUP_FS

RUN_CNTL_SF

Tables Updated

RUN_CNTL_SF

Printing Pull Ticket Labels

Access the Pull Ticket/Pull List Options page (Manufacturing Definitions, Kanban, Electronic Kanbans, Print Pull Ticket/Pull List, Pull Ticket/Pull List Options).

Pull Ticket/Pull List Options

Pull Ticket/Pull List Range

Run Control ID: Ticket

[Report Manager](#)

[Process Monitor](#)

Run

Language: English

Business Unit: US010

Repl Method

☐ Pull List

☐ Pull Ticket

☒ Both

WIP Replenishment Output Opt

☐ Create File for Pull Tickets

☐ Print Bar Code

☐ Print Bar Coded Control Flags

Format ID:

File Directory:

File Name:

Request Print Status Option

☒ Not Printed

☐ Previously Printed

☐ Both Printed and Unprinted

Sort Option

☐ Kanban ID

☒ Item ID

☐ WIP Location

☐ Repl Source

☐ Break

WIP Replenishment Source Opt

☐ Inventory Location

☐ Feeder Line (Prdn Area)

☒ Both

Pull Ticket/Pull List Options page

**WIP Replenishment
Output Opt**

Choose one of the three options for the WIP Replenishment Output Options.

- Select Create File for Pull Ticketsto create an extract file. You can use this file to download pull ticket information to label generation software.
- Select Print Bar Code to print bar codes for bar coded fields on the pull ticket.
- Select Print Bar Coded Control Flags to attach an item's control flags to the bar code printed on each line of the pull ticket. These control flags enable the electronic data collection system to prompt for the lot ID, serial ID, staged date, or shipping serial ID immediately after the user scans the bar-coded line number field. For cases that do not require control flags, you might prefer not to select this check box. The format for the bar code printed for each detail line is LSDAH:99999, where:
 - L = Lot ID Control Flag
 - S = Serial ID Control Flag
 - D = Staged Date Control Flag
 - A = Actual Cost Control Flag
 - H = Shipping Serial ID Control Flag
 - : = Constant
 - 99999 = Line Number

Note. PeopleSoft delivers printer settings for all SQR output to a generic line printer. However, when printing bar coded information on reports on a PCL printer (HP Laser Jet), you must first define the printer type accordingly. You may do this by changing the printer type settings delivered in SETENV.SQC from LINEPRINTER to HPLASERJET.

Format ID

Select a Format ID for the extract file. You set up format IDs on the Data Collection Label Setup page.

**File Directory and File
Name**

Enter the File Directory and File Name to which you want to save the pull ticket file extract.

**Request Print Status
Option**

Select a Request Print Status Option: Not Printed, Previously Printed, or Both Printed and Unprinted.

See Also

PeopleSoft Enterprise Flow Production 9.1 PeopleBook, "Setting Up PeopleSoft Flow Production," Setting Up WIP Replenishment Item Attributes

PeopleSoft Enterprise Flow Production 9.1 PeopleBook, "Maintaining Kanban Cards and Replenishment Requests," Understanding Kanban Cards and Production Replenishment Requests

Printing Kanban Card Labels

Access the Print Kanban Cards page (SCM Integrations, Barcode Labels, Kanban Card Label, Print Kanban Cards).

Print Kanban Cards

Kanban Card Range

Run Control ID: CARD

[Report Manager](#)

[Process Monitor](#)

Run

Language: English

Business Unit: US010

WIP Repl Kanban Card Output

☐ Create File for Kanban Cards

☐ Print Bar Code

☐ Print Bar Coded Control Flags

Format ID:

File Directory:

File Name:

Request Print Status Option

☒ Not Printed

☐ Previously Printed

☐ Both Printed and Unprinted

Sort Option

☐ Kanban ID

☒ Item ID

☐ WIP Location

☐ Repl Source

WIP Replenishment Source Opt

☒ Inventory Location

☒ Feeder Line (Prdn Area)

☒ Vendor

Print Kanban Cards page

WIP Repl Kanban Card Output Choose one of the three options for the WIP Replenishment Kanban Card Output options.

- Select Create File for Kanban Cardsto create an extract file. You can use this file to download Kanban card information to label generation software.
- Select Print Bar Code to print bar codes for bar coded fields on the Kanban card.
- Select Print Bar Coded Control Flags to attach an item's control flags to the bar code printed on each line of the Kanban card. Flow Production uses serial control and lot control flags. These control flags enable the electronic data collection system to prompt for the lot ID, serial ID, staged date, or shipping serial ID immediately after the user scans the bar-coded line number field. For cases that do not require control flags, you might prefer not to select this check box. The format for the bar code printed for each detail line is LSDAH:99999, where:
 - L = Lot ID Control Flag
 - S = Serial ID Control Flag
 - D = Staged Date Control Flag
 - A = Actual Cost Control Flag
 - H = Shipping Serial ID Control Flag
 - : = Constant
 - 99999 = Line Number

Note. PeopleSoft delivers printer settings for all SQR output to a generic line printer. However, when printing bar coded information on reports on a PCL printer (HP Laser Jet), you must first define the printer type accordingly. You may do this by changing the printer type settings delivered in SETENV.SQC from LINEPRINTER to HPLASERJET.

Format ID Select a Format ID for the extract file. You set up format IDs on the Data Collection Label Setup page.

File Directory and File Name Enter the File Directory and File Name to which you want to save the Kanban card file extract.

Request Print Status Option Select a Request Print Status Option: Not Printed, Previously Printed, or Both Printed and Unprinted.

If you print Kanban cards that haven't been previously printed, the system changes the Kanban ID status to Open from New. Cards that were previously printed display Reprint on the card.

See Also

PeopleSoft Enterprise Flow Production 9.1 PeopleBook, "Setting Up PeopleSoft Flow Production," Setting Up WIP Replenishment Item Attributes

PeopleSoft Enterprise Flow Production 9.1 PeopleBook, "Maintaining Kanban Cards and Replenishment Requests," Understanding Kanban Cards and Production Replenishment Requests

Selecting the Kanban Card Label Range

See *PeopleSoft Enterprise Flow Production 9.1 PeopleBook*, "Maintaining Kanban Cards and Replenishment Requests," Understanding Kanban Cards and Production Replenishment Requests.

Printing Storage Location Labels

Access the Storage Location Label page (SCM Integrations, Barcode Labels, Storage Location Label).

To print storage location labels:

1. Select the storage areas for which you want to print labels in the storage area fields.

If you select only the first level, the system prints labels for all the storage locations in that area down to the lowest level.
2. If you want to print labels for all the locations in your warehouse, then you would enter the area fields only to the warehouse level.
3. If you want to print labels for all the bins in an aisle, then you would enter the storage area fields down to the aisle level.

Tables Accessed

BCT_LABEL_FS

BCT_SETUP_FS

STOR_LOC_INV

Tables Updated

RUN_CNTL_IN

Printing Item Storage Labels

Access the Item Storage Label page (SCM Integrations, Barcode Labels, Item Storage Label).

To print item storage labels:

1. Select the Autogenerate Labels check box to have the system automatically generate all the item labels that you need for a storage location.
2. The Stor Loc (storage location) fields are required only if you use the Autogenerate Labels option.

Use these fields if you want to print labels for all the items in a specific storage location.

3. If you select Autogenerate Labels and enter a storage area, you can enter the unit of measure by which you want to print the labels in the Group UOM (group unit of measure) field.

For example, Location B01 has a quantity of *100 EA* (each). You select group UOM of *CS* (case). If there are 25 each per case, then the system generates four labels. If you select a group UOM of *EA* (each), then the system generates 100 labels.

4. If you select a serial-controlled item, the Group UOM field automatically appears with the standard unit of measure for the item and is unavailable for entry.

One label per serial ID is printed.

5. If you enter a storage area for a lot-controlled, serial-controlled, staged date tracked, or actual costed item, the system verifies that the item exists in the specified storage area.

Tables Accessed

BCT_LABEL_FS

BCT_SETUP_FS

BU_ITEMS_INV

INV_ITEMS

INV_STCK_UOM_VW

MASTER_ITEM_TBL

PO_RECEIVED_INV

Tables Updated

RUN_CNTL_IN

Printing Storage Container Labels

Access the Storage Container Labels page (SCM Integrations, Barcode Labels, Storage Container Label).

To print storage container labels:

1. Select a storage container prefix in the Beg Seq (beginning sequence) field.

The storage container prefixes are defined on the Automatic Numbering page.

2. Enter the number of labels that you want to print in the Nbr in Seq (number in sequence) field.

The next sequence of labels for the storage container prefix that you entered are printed. The last sequence number used for the storage container prefix that you entered is saved in the system.

Tables Accessed

BCT_LABEL_FS

BCT_SETUP_FS

AUTO NUM TBL

Tables Updated

AUTO_NUM_TBL

RUN CNTL IN

Printing Shipping Carton Labels

Access the Shipping Carton Label page (SCM Integrations, Barcode Labels, Shipping Carton Label).

Shipping Carton Label

Run Control ID: Carton [Report Manager](#) [Process Monitor](#)

Language:

Process Request Parameters Find | View All First **1 of 1** Last

*Request ID: Unit:

Pick Batch ID: Pick Line:

Source: Source Unit: Order: Line:

Printing Selection

- ☒ Pick Batch ID
- ☐ Order Number

Format ID

Format ID: Copies:

Unit of Measure

- ☒ Order
- ☐ Standard
- ☐ Standard Pack

Override File

☐ Override File File Directory: File Name:

Shipping Carton Label page

If the format ID is not entered, it automatically appears first from the ship to location, then from the sold to location, or then from the Label Setup page, in that order, depending on which of these values exist.

To specify a file directory and file name for the label extraction file, select the Override File check box, and enter the file directory and file name. Leave the Override File check box clear to create the extraction file in the default directory with the default file name.

To select the directory for the carton label file, use the following hierarchy:

1. The path you specify for the file directory takes precedence.
2. If you do not specify a file directory, the directory automatically appears the Pick Plan Bar Coding Options page in the Setup Fulfillment component (ORDER_FULF_SETUP).
3. If no directory is specified on the Pick Plan Bar Coding Options page in the Setup Fulfillment component, the directory name is the FILEPREFIX that was specified in SETENV.SQC during the initial system setup.

For information on setting the FILEPREFIX in the SETENV.SQC, refer to the installation documentation.

4. If no FILEPREFIX was specified during system setup, the directory name defaults to the current directory where the label program is running.

To name the file for the carton label file, use the following hierarchy:

1. The file name specified in the File Name field takes precedence.
2. If you don't specify a file name, the file name is the file prefix defined on the Pick Plan Bar Coding Options page in the Setup Fulfillment component combined with the last five digits of the process ID and the file suffix defined on the Pick Plan Bar Coding Options page.
3. If nothing is specified on the Pick Plan Bar Coding Options page, the last five digits of the process ID are used as the file name and the file name suffix is the FILESUFFIX that you specified in SETENV.SQC when you initially set up the system.

For information on setting the FILESUFFIX in the SETENV.SQC, refer to the installation documentation.

4. If no FILESUFFIX was specified in SETENV.SQC when you initially set up the system, the last five digits of the process ID are used as the file name and no suffix is appended.

<i>File Prefix</i>	<i>File Name</i>	<i>File Suffix</i>
Override	Override	Override
The file prefix defined on the Pick Plan Bar Coding Options page in the Setup Fulfillment component.	The last five digits of the process ID. If multiple requests can be entered on the label request page, then an additional two-digit sequential number starting with 01 is appended to the end of the file name.	The file suffix defined on the Pick Plan Bar Coding Options page in the Setup Fulfillment component.
None	The last five digits of the process ID. If multiple requests can be entered on the label request page, then an additional two-digit sequential number starting with 01 is appended to the end of the file name.	The FILESUFFIX that you specified in SETENV.SQC.

<i>File Prefix</i>	<i>File Name</i>	<i>File Suffix</i>
None	The last five digits of the process ID. If multiple requests can be entered on the label request page, then an additional two-digit sequential number starting with 01 is appended to the end of the file name.	None.

Tables Accessed

BCT_LABEL_FS

BCT_SETUP_FS

BU_ITEMS_INV

CARRIER_ID

CUST_ADDRESS

CUST_SHIPTO_OPT

CUST_SOLDTO_OPT

IN_DEMAND

DF_SETUP_INV

DF_SETUP_IT_INV

INV_ITEM_UOM

INV_ITEMS

ISSUE_HDR_INV

LOCATION_TBL

MASTER_ITEM_TBL

ORD_LINE

Tables Updated

RUN_CNTL_IN

Printing Shipping Serial Labels

Access the Shipping Serial Labels page (SCM Integrations, Barcode Labels, Serial Label).

Tables Accessed

AUTO_SERIAL_NUM

BCT_LABEL_FS

BCT_SETUP_FS

Tables Updated

AUTO_SERIAL_NUM

RUN_CNTL_IN

Printing Shipping Container Label

The UCC/EAN manufacturer ID is included in the extract file for the shipping container labels. The UCC/EAN manufacturer ID along with the shipping container serial ID provide a unique identifier to create a unique shipping ID for the shipping container.

Note. You cannot print shipping container labels for more than one location at a time. If the criteria that you specify include multiple ship to locations, a warning message appears requesting that you narrow the criteria until only one ship to location is included.

Tables Accessed

BCT_LABEL_FS

BCT_MFGID_SETUP

BCT_SETUP_FS

CARRIER_ID

CUST_ADDRESS

CUST_SHIPTO_OPT

CUST_SOLDTO_OPT

IN_DEMAND

ISSUE_HDR_INV

LOCATION_TBL

ORD_LINE

Tables Updated

BCT_MFGID_SETUP

IN_DEMAND

RUN_CNTL_IN

See Also

Chapter 8, "Designing an Electronic Data Collection System," Setting Up the UCC/EAN Manufacturer ID, page 155

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Packing Orders for Shipment," Understanding Shipping Containers and Packing Sessions

Chapter 10

Understanding Record Layouts for the Electronic Data Collection System

This chapter discusses:

- Par location count and physical accounting file formats.
- Label extract file record definitions.
- Picking plan extract file record definitions.

Note. The information in this chapter is formatted so that a field-specific notes section follows each table. The field-specific notes section includes further details about the fields in the preceding table that are marked with an asterisk (*).

PeopleSoft currently does not support the creation of extract files for labels, paperless picking, par location replenishment, or physical accounting from processes on MVS servers. For these environments, the system supports the extract files by running processes using an application server.

Par Location Count and Physical Accounting File Formats

PeopleSoft Inventory provides two transactions that can be processed using batch flat files that are downloaded and uploaded using SQR programs.

The system uses batch processes to generate a flat file containing the item to be counted for either of the transactions. The flat file is passed to a third-party electronic data collection system that performs the count. The flat file must then be returned to PeopleSoft in the same format.

The files that you download to and upload from electronic data collection devices must conform to these rules:

- The file name must be eight characters or less.

An extension of .upl is automatically appended to upload file names. An extension of .dwn is automatically appended to download file names.

- The first field must start in column one.
- There must be a single blank space between each field.
- All fields must be left-justified.
- The system expects the file that is read by the upload process to have a .upl extension.

Par Location Count

You can download par location count information for use in a hand-held bar code device. You can select the following options to download:

- One par location at a time.
- All par locations for a par location group.
- All par locations for a specified business unit.
- All par locations.

Below is the layout of the par location download and upload file.

The download process creates a .dwn file of 404 characters per record from the par location definition tables (CART_ATTRIB_INV and CART_TEMPL_INV). The upload expects the same file layout, 404 characters per record as a .upl file. The upload process updates the par location count tables (CART_CT_INF_INV). Each par location is created with an unprocessed status, and you can view them on the Par Location Count Inquiry page.

Contents	Format
BUSINESS_UNIT	5
INV_CART_ID	15
CART_GROUP	5
CART_REPLEN_OPT *	2
SHADOW_FLAG *	1
QTY_OPTION *	2
INV_ITEM_ID	18
DESCR	30
COMPARTMENT	10
COUNT_ORDER	4
COUNT_REQUIRED *	1

Contents	Format
SUFFICIENT_STOCK *	1
CART_REPLEN_CTRL *	2
CART_COUNT_QTY *	16
DEFAULT_QTY	16
QTY_OPTIMAL	16
FOQ (Fixed Order Qty)	16
QTY_MAXIMUM	16
UNIT_OF_MEASURE	3
DISTRIB_TYPE	10
DEPTID	10
TRANSFER_COST	15
PRICE_MARKUP_PCT	15
CHARGE_CODE	20
ACCOUNT	10
ALTACCT	10
OPERATING_UNIT	8
PRODUCT	6
PROJECT_ID	15

Contents	Format
CONS_NON_STOCK	1
BCKORDR_CNCL_FLAG	1
CHANGE_MARKUP_AMT	16
CHANGE_MARKUP_PCNT	15
MATERIAL_RECON_FLG	1
USG_TRCKNG_METHOD	2
LAST_OPRID	8
LAST_DTTM_UPDATE	26

Field-Specific Notes

See the field-specific information that follows.

CART_REPLEN_OPT

Specifies the way in which an item is to be replenished.

01 [Symbol_Wingdings_224] "stk" or "stock" (creates an MSR).

02 [Symbol_Wingdings_224] "less" or "stockless" (creates a staged purchase order).

03 [Symbol_Wingdings_224] "nons" or "non-stock" (creates a requisition).

04 [Symbol_Wingdings_224] "not replenished" (item is not to be replenished).

Note. The system uses stockless and non-stock replenishment options only if PeopleSoft Purchasing is installed.

SHADOW_FLAG

The shadow par location flag, which has an online label of *not replenished*, appears on the hand-held bar code device. This informs the user that this par location is not to be replenished.

QTY_OPTION

A hand-held bar code device can modify this field.

The quantity options for each par location count appears by default based on the default quantity option that you defined on the Par Location Group Definition page.

If the default quantity option is count, the system prompts the user to enter the quantity on hand on the par location. If the default quantity is request, the system prompts the user to enter the requested quantity.

Values are:

01 [Symbol_Wingdings_224] "c" or "count qty."

02 [Symbol_Wingdings_224] "r" or "request qty."

COUNT_REQUIRED

The COUNT_REQUIRED flag is evaluated to determine whether a count must be entered for an item. This flag is defined per item on the Par Location Group Definition page.

SUFFICIENT_STOCK

A hand-held bar code device can modify this field.

The SUFFICIENT_STOCK flag is available for entry on the hand-held bar code device if the quantity option is *count qty*. PeopleSoft provides this field, so that the user does not need to enter a count for that item if it is not necessary.

CART_REPLEN_CTRL

Identifies how the order quantity is to be calculated if the quantity option is set to count quantity.

01 [Symbol_Wingdings_224] "Par"

02 [Symbol_Wingdings_224] "FOQ" or "Fixed Order Qty"

03 [Symbol_Wingdings_224] "Min/Max"

CART_COUNT_QTY

A hand-held bar code device can modify this field.

The quantity options for each par location count appears by default based on the default quantity option that you defined on the Par Location Group Definition page.

If the default quantity option is count, the system prompts the user to enter the quantity on hand on the par location. If the default quantity is request, the system prompts the user to enter the requested quantity.

See Also

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Managing Par Inventory"

Physical Accounting

You can use a hand-held bar code device to conduct your physical counting event. To ensure data transfer accuracy, first configure the download and upload file formats for the counting sheet according to the layout presented in the next table. All fields must be left-justified, with a space between each field.

<i>Field</i>	<i>Comments</i>	<i>Format</i>
INV_ITEM_ID	Required.	Char 18
STORAGE_AREA	Required.	Char 5
STOR_LEVEL_1	Required, if set up for the storage area.	Char 4
STOR_LEVEL_2	Required, if set up for the storage area.	Char 4
STOR_LEVEL_3	Required, if set up for the storage area.	Char 4
STOR_LEVEL_4	Required, if set up for the storage area.	Char 4
UNIT_OF_MEASURE	Required. Must contain the stocking unit of measure (UOM) at the location.	Char 3
STAGED_DATE	Required. If the item is staged-date controlled, this field must contain the appropriate staged date. If the item is not staged-date controlled, include the filler default value that you established on the Installation Options - Inventory page in the Installation Options component.	MMDDYYYY
SERIAL_ID	Required. If the item is serial-controlled, this field must contain the appropriate serial ID. If the item is not serial-controlled, include the filler default value that you established on the Installation Options - Inventory page in the Installation Options component.	Char 20

<i>Field</i>	<i>Comments</i>	<i>Format</i>
INV_LOT_ID	Required. If the item is lot-controlled, this field must contain the appropriate lot ID. If the item is not lot-controlled, include the filler default value that you established on the Installation Options - Inventory page in the Installation Options component.	Char 15
CONTAINER_ID	Optional.	Char 10
QTY	Required. Must contain a quantity; zero is valid.	Nbr 16
UNIT_OF_MEASURE_COUNT	Required. Must contain a valid UOM for the item. If this UOM is different than the stocking UOM noted above, then the quantity is converted to the stocking UOM before updating the database.	Char 3
ITEM_DESCR	Optional. For informational purposes only.	Char 30
COUNT_DTTM	Must contain a date. If the field is blank then the system does not update the row.	MM/DD/YYYY HH:MI:SS

See Also

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Counting Inventory Stock"

Label Extract File Record Definitions

The label extract file record definitions define the format for each label extract file. The label extract file is the output that the PeopleSoft application sends to the label printing software that you use to print the bar-coded labels.

The label extract files contain many field values that you can use in your label print process.

The label extract files are in comma-delimited format.

Each label extract file that contains an item ID also includes control flags that identify characteristics of that item. The control flags can be concatenated to various key fields that are printed as bar codes. For example, suppose that you concatenate the control flags to the item ID on the item storage labels, your electronic data collection system knows what other keys for which to prompt.

Here are the five control flags:

Lot Control Flag	Set to <i>Y</i> if the item is lot-controlled. Set to <i>N</i> if the item is not lot-controlled.
Serial Control Flag	Set to <i>Y</i> if the item is serial-controlled. Set to <i>N</i> if the item is not serial-controlled.
Staged Date Control Flag	Set to <i>Y</i> if the item is staged-date controlled. Set to <i>N</i> if the item is not staged-date controlled.
Actual Cost Control Flag	Set to <i>Y</i> if the item is actual-costed. Set to <i>N</i> if the item is not actual-costed.
Shipping Serial Control Flag	Set to <i>Y</i> if the item is shipping serial-controlled. Set to <i>N</i> if the item is not shipping serial-controlled. The shipping serial control flag is only included on the shipping carton and shipping container transactions.

Note. The Format ID is an optional field on all of the label extract file records. It is in the first position only if the Include Format check box is selected for the specified format ID.

See Also

[Chapter 3, "Implementing Integrations," Setting Up Electronic Data Collections Defaults, page 78](#)

Item Usage Label

The label extract file record definitions define the format for the label extract file.

<i>Storage Location Label Field Name</i>	<i>Format</i>
Label Format ID	Char 30
Business Unit	Char 10
Location Code/Par Location Code	Char 15
Location Description/Par Location Description	Char 30
Item ID	Char 40

<i>Storage Location Label Field Name</i>	<i>Format</i>
Item Description	Char 30
Quantity	Nbr 11.4
Unit of Measure	Char 3
Standard Unit of Measure	Char 3

Item Storage Label

The label extract file record definitions define the format for the label extract file.

<i>Item Storage Label Field Name</i>	<i>Format</i>	<i>Desc./Com.</i>
Label Format ID	Char 30	N/A
Business Unit	Char 10	N/A
Item ID	Char 40	N/A
Item Description	Char 30	N/A
Lot Control Flag	Char 1	N/A
Lot ID	Char 15	N/A
Serial Control Flag	Char 1	N/A
Serial ID	Char 35	N/A
Staged Date Flag	Char 1	N/A
Staged Date	Date 10	N/A
Actual Cost Flag	Char 1	This field is set to Y if the item is actual-costed.

<i>Item Storage Label Field Name</i>	<i>Format</i>	<i>Desc./Com.</i>
Unit of Measure	Char 3	N/A
Quantity	Nbr 11.4	N/A
Standard Unit of Measure	Char 3	N/A
Standard Quantity	Nbr 11.4	N/A
Reference Number	Char 30	N/A

Storage Container Label

The label extract file record definitions define the format for the label extract file.

<i>Storage Container Label Field Name</i>	<i>Format</i>
Label Format ID	Char 30
Container Number	Nbr 18

Storage Location Label

The label extract file record definitions define the format for the label extract file.

<i>Storage Location Label Field Name</i>	<i>Format</i>
Label Format ID	Char 30
Business Unit	Char 10
Storage Location	Char 5
Storage Level 1	Char 4
Storage Level 2	Char 4

<i>Storage Location Label Field Name</i>	<i>Format</i>
Storage Level 3	Char 4
Storage Level 4	Char 4

Shipping Carton Label

The label extract file record definitions define the format for the label extract file.

<i>Shipping Carton Label Field Name</i>	<i>Format</i>	<i>Desc./Com.</i>
Label Format ID	Char 30	N/A
Ship From Location	Char 30	N/A
Ship From Address1	Char 55	N/A
Ship From Address2	Char 55	N/A
Ship From Address3	Char 55	N/A
Ship From Address4	Char 55	N/A
Ship From Num1	Char 6	N/A
Ship From Num2	Char 4	N/A
Ship From House Type	Char 2	N/A
Ship From City	Char 30	N/A
Ship From Country	Char 30	N/A
Ship From Addr field1	Char 2	N/A
Ship From Addr field2	Char 4	N/A

<i>Shipping Carton Label Field Name</i>	<i>Format</i>	<i>Desc./Com.</i>
Ship From Addr field3	Char 4	N/A
Ship From Geo Code	Char 11	N/A
Ship From In City Limit	Char 1	N/A
Ship From State	Char 4	N/A
Ship From Postal	Char 12	N/A
Ship From Country	Char 3	N/A
Customer Name	Char 40	N/A
Customer Name1	Char 40	N/A
Customer Name2	Char 40	N/A
Address1	Char 55	N/A
Address2	Char 55	N/A
Address3	Char 55	N/A
Address4	Char 55	N/A
Num1	Char 6	N/A
Num2	Char 4	N/A
House Type	Char 2	N/A
City	Char 30	N/A
County	Char 30	N/A

<i>Shipping Carton Label Field Name</i>	<i>Format</i>	<i>Desc./Com.</i>
State	Char 4	N/A
Postal	Char 12	N/A
Country	Char 3	N/A
Addr field1	Char 2	N/A
Addr field2	Char 4	N/A
Addr field3	Char 4	N/A
Geo Code	Char 11	N/A
In City Limit	Char 1	N/A
Carrier	Char 30	N/A
Ship To Customer ID/or Location	Char 15	This field contains either the ship to customer ID or the location, depending on the field that you used when you created the order.
Route Code	Char 6	N/A
Route Stop Number	Number 5	N/A
Customer PO	Char 25	N/A
Customer PO Line	Char 11	N/A
Customer Contract Number	Char 25	N/A
Customer Contract Line Number	Char 3	N/A
Customer Item Number	Char 40	N/A

<i>Shipping Carton Label Field Name</i>	<i>Format</i>	<i>Desc./Com.</i>
Business Unit	Char 10	N/A
Demand Source	Char 2	N/A
Source Business Unit	Char 5	N/A
Order Number	Char 10	N/A
Order Line Number	Nbr 5	N/A
Schedule Line Number	Nbr 7	N/A
Inventory Item ID	Char 40	N/A
Demand Line Number	Nbr 4	N/A
Product ID	Char 40	N/A
Parent Product ID	Char 40	N/A
Lot Control Flag	Char 1	N/A
Standard Serial Control Flag	Char 1	N/A
Staged Date Control Flag	Char 1	N/A
Actual Cost Flag	Char 1	This field is set to Y if the item is actual-costed.
Ship Serial Control Flag	Char 1	N/A
Pick Batch ID	Nbr 10	N/A
Pick Batch Line Number	Nbr 5	N/A
Carton Qty in Ordering UOM	Nbr 11.4	N/A

<i>Shipping Carton Label Field Name</i>	<i>Format</i>	<i>Desc./Com.</i>
Ordering UOM	Char 3	N/A
Carton Qty in Standard UOM	Nbr 11.4	N/A
Standard UOM	Char 3	N/A
Carton Qty in Standard Pack UOM	Nbr 11.4	N/A
Standard Pack UOM	Char 3	N/A
Carton Sequence	Char 10	N/A

Shipping Container Label

The label extract file record definitions define the format for the label extract file.

<i>Shipping Container Label Field Name</i>	<i>Format</i>	<i>Desc./Com.</i>
Label Format ID	Char 30	N/A
Ship From Location	Char 30	N/A
Ship From Address1	Char 55	N/A
Ship From Address2	Char 55	N/A
Ship From Address3	Char 55	N/A
Ship From Address4	Char 55	N/A
Ship From Num1	Char 6	N/A
Ship From Num2	Char 4	N/A
Ship From House Type	Char 2	N/A

<i>Shipping Container Label Field Name</i>	<i>Format</i>	<i>Desc./Com.</i>
Ship From City	Char 30	N/A
Ship From County	Char 30	N/A
Ship From State	Char 4	N/A
Ship From Postal	Char 12	N/A
Ship From Country	Char 3	N/A
Ship From Addr field1	Char 2	N/A
Ship From Addr field2	Char 4	N/A
Ship From Addr field3	Char 4	N/A
Ship From Geo Code	Char 11	N/A
Ship From In City Limit	Char 1	N/A
Customer Name	Char 40	N/A
Customer Name1	Char 40	N/A
Customer Name2	Char 40	N/A
Address1	Char 55	N/A
Address2	Char 55	N/A
Address3	Char 55	N/A
Address4	Char 55	N/A
Num1	Char 6	N/A

<i>Shipping Container Label Field Name</i>	<i>Format</i>	<i>Desc./Com.</i>
Num2	Char 4	N/A
House Type	Char 2	N/A
City	Char 30	N/A
County	Char 30	N/A
State	Char 4	N/A
Postal	Char 12	N/A
Country	Char 3	N/A
Carrier	Char 30	N/A
Ship To Customer ID or Location	Char 15	This field contains either the ship to customer ID or the location, depending on the field that you used when you created the order.
Manufacturer ID Number	Char 7	N/A
Shipping Container Serial Number	Nbr 9	N/A
Carton Sequence	Char 10	N/A
Business Unit	Char 10	N/A

Shipping Serial Number Label

The label extract file record definitions define the format for the label extract file.

<i>Serial Number Label Field Name</i>	<i>Format</i>
Label Format ID	Char 30

<i>Serial Number Label Field Name</i>	<i>Format</i>
Serial ID	Nbr 35

Production Completion Label

The label extract file record definitions define the format for the label extract file.

<i>Production Completion Label Field Name</i>	<i>Format</i>	<i>Desc./Com.</i>
Label Format ID	Char 30	N/A
Business Unit	Char 10	See note.
Production ID	Char 10	N/A
Production Area	Char 10	N/A
Item ID	Char 40	See note.
Item Description 30	Char 30	N/A
Configuration Code	Char 50	N/A
Revision	Char 4	N/A
Production Type	Char 2	N/A
Lot Control Flag	Char 1	N/A
Serial Control Flag	Char 1	N/A
Staged Date Flag	Char 1	N/A
Actual Cost Flag	Char 1	N/A
Lot ID	Char 15	N/A

<i>Production Completion Label Field Name</i>	<i>Format</i>	<i>Desc./Com.</i>
Standard Unit of Measure	Char 3	N/A
Standard Pack Quantity	Nbr 11.4	N/A
Std Pack Unit of Measure	Char 3	N/A
Quantity in Std Pack UOM	Nbr 11.4	N/A
Date	Date	CCYYMMDD
Op Sequence	Number 4.0	N/A
Output Type	Char 2	N/A

Note. Certain fields allow for possible larger sizes to accommodate customer revisions. In general, field sizes should match that within the PeopleSoft COBOL programs. Online pages use the sizes as defined within PeopleSoft Application Designer. A size mismatch between the file and the definition may result in an error when data is retrieved through the flat file.

Purchasing Receipt Label

The label extract file record definitions define the format for the label extract file.

<i>Receiving Label Field Name</i>	<i>Format</i>
Label Format ID	Char 30
Inventory Business Unit	Char 10
Item ID	Char 40
Item Description	Char 30
Lot Control Flag	Char 1
Lot ID	Char 15

<i>Receiving Label Field Name</i>	<i>Format</i>
Serial Control Flag	Char 1
Serial ID	Char 35
Receipt Date	Date 10
Actual Cost Flag	Char 1
Receiving Business Unit	Char 5
Receiver ID	Char 10
Receiver Line Number	Nbr 5
Unit of Measure	Char 3
Quantity	Nbr 11.4
Standard Unit of Measure	Char 3
Standard Quantity	Nbr 11.4
Production ID	Char 10
Production Sequence Number	Nbr 2
Staged Date Flag	Char 1

Kanban Card and Pull Ticket Label

The label extract file record definitions define the format for the label extract file.

<i>Kanban Field Name</i>	<i>Type</i>
Label Format ID	Char 30

<i>Kanban Field Name</i>	<i>Type</i>
Business Unit	Char 10
Report Type • 2 = Pull Ticket • 3 = Kanban Card	Char 1
Replenishment Source • 1 = Inventory • 2 = Vendor • 3 = Feeder Line	Char 1
Kanban ID	Char 15
Item ID	Char 40
Item Description	Char 30
WIP Storage Area	Char 5
WIP StorageLevel 1	Char 4
WIP StorageLevel 2	Char 4
WIP StorageLevel 3	Char 4
WIP StorageLevel 4	Char 4
Source Storage Area Blank if Replenishment Source <> INV	Char 5
Source StorageLevel 1 Blank if Repl Source <> INV	Char 4
Source StorageLevel 2 Blank if Repl Source <> INV	Char 4

<i>Kanban Field Name</i>	<i>Type</i>
Source StorageLevel 3 Blank if Repl Source <> INV	Char 4
Source StorageLevel 4 Blank if Repl Source <> INV	Char 4
Production Area Blank if Repl Source <> Feeder	Char 10
Vendor ID Blank if Repl Source <> Vendor	Char 10
Vendor Name Blank if Repl Source <> Vendor	Char 40
Vendor Location Blank if Repl Source <> Vendor	Char 10
Vendor Location Descr Blank if Repl Source <> Vendor	Char 30
Vendor Item ID Blank if Repl Source <> Vendor	Char 20
Vendor Qty Blank if Repl Source <> Vendor	Number 11.4
Vendor UOM Blank if Repl Source <> Vendor	Char 3
Qty Standard UOM	Number 11.4
Standard UOM	Char 3
Lot Control Flag	Char 1

<i>Kanban Field Name</i>	<i>Type</i>
Serial Control Flag	Char 1
Print Count	Number 3
DateTime Stamp	Datetime 14

Picking Plan Extract File Record Definitions

The system generates this optional extract file at the same time that it initiates the picking plan. Its content mimics the data contained within the printed picking plan document and provides an electronic means for the front-end (hand-held or batch) process to validate and enhance data collection. Data in the file is comma-separated.

The picking plan extract file includes five control flags that identify characteristics of the item or component being picked:

Lot Control Flag	Set to <i>Y</i> if the item is lot-controlled. Set to <i>N</i> if the item is not lot-controlled.
Serial Control Flag	Set to <i>Y</i> if the item is serial-controlled. Set to <i>N</i> if the item is not serial-controlled.
Staged Date Control Flag	Set to <i>Y</i> if the item is staged-date controlled. Set to <i>N</i> if the item is not staged-date controlled.
Actual Cost Control Flag	Set to <i>Y</i> if the item is actual-costed. Set to <i>N</i> if the item is not actual-costed.
Shipping Serial Control Flag	Set to <i>Y</i> if the item is shipping serial-controlled. Set to <i>N</i> if the item is not shipping serial-controlled. The shipping serial control flag is only included in the Inventory picking extract file.

See Also

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Picking Inventory," Using the Order Release Request Run Control

Inventory Picking Extract File Format

The system generates the inventory picking extract file at the same time that it initiates the pick plan.

<i>Picking Plan Extract File Field Name</i>	<i>Format</i>
Business Unit*	Char 10
Extract Source Flag*	Char 1
Pick Batch ID	Nbr 10
Pick List Line Number	Nbr 5
Sequence Number	Nbr 2
Pick Mode Flag*	Char 1
Customer ID	Char 15
Ship To Customer ID	Char 15
Location	Char 10
Demand Source	Char 2
Source Business Unit	Char 5
Order Number	Char 10
Order Int Line Number	Nbr 5
Schedule Line Number	Nbr 4.2
Parent Product ID	Char 18
Item ID*	Char 40
Item Description 30	Char 30
Item Configuration Code	Char 50

<i>Picking Plan Extract File Field Name</i>	<i>Format</i>
Container ID	Char 10
Storage Area	Char 5
Storage Level 1	Char 4
Storage Level 2	Char 4
Storage Level 3	Char 4
Storage Level 4	Char 4
Order/Pick Quantity in Standard UOM	Nbr 11.4
Order/Pick Quantity in Order/Pick UOM	Nbr 11.4
Reserved Quantity in Standard UOM	Nbr 11.4
Reserved Quantity in Location UOM	Nbr 11.4
Available Quantity in Standard UOM	Nbr 11.4
Available Quantity in Location UOM	Nbr 11.4
Standard UOM	Char 3
Order/Pick UOM	Char 3
Location UOM	Char 3
Order UOM Conversion Rate	Nbr 7.8
Location UOM Conversion Rate	Nbr 7.8
Lot ID	Char 15

<i>Picking Plan Extract File Field Name</i>	<i>Format</i>
Serial ID	Char 35
Staged Date*	Char 8
Lot Control Flag	Char 1
Serial Control Flag	Char 1
Staged Date Control Flag	Char 1
Ship Serial Control Flag	Char 1
Hard Allocation Flag	Char 1
Partial Quantity Flag	Char 1
Hard Allocation Flag	Char 1
Partial Quantity Flag	Char 1
Substitute Flag	Char 1
Qty Precision for Std UOM	Char 1
Rounding Rule for Std UOM	Char 1
Qty Precision for Loc UOM	Char 1
Rounding Rule for Loc UOM	Char 1
Allow Overpick Flag	Char 1
Maximum Picking Tolerance	Nbr 3.2
Load ID	Char 10

<i>Picking Plan Extract File Field Name</i>	<i>Format</i>
Carrier ID	Char 10
Ship Via	Char 10
Route Code	Char 6
Route Stop Number	Nbr 5
Lot Availability Date CCYYMMDD	Char 8
Lot Retest Date CCYYMMDD	Char 8
Lot Expiration Date CCYYMMDD	Char 8
Scheduled Ship Date CCYYMMDD	Char 8
ASRS ID	Nbr 15
Picking Zone	Char 6
Original Item ID	Char 40
Original or Reprint Flag *	Char 1
Date / Time Stamp*	Char 14

Field-Specific Notes

See the field-specific information that follows.

Business Unit

The Business Unit field permits possible larger sizes to accommodate customer revisions. In general, field sizes should match that within the PeopleSoft COBOL programs. Online pages use the sizes as defined within PeopleSoft Application Designer.

Extract Source Flag

0 = Inventory Pick Plan

1 = Manufacturing Pick Plan

Pick Mode Flag

0 = Push

1 = Pull

Item ID

The Item ID field permits possible larger sizes to accommodate customer revisions. In general, field sizes should match that within the PeopleSoft COBOL programs. Online pages use the sizes defined within PeopleSoft Data Designer.

Staged Date

The format is CCYYMMDD.

Original or Reprint Flag

0 = Original

1 = Reprint

Date / Time Stamp

The format is CCYYMMDDHHMMSS.

Manufacturing Picking Extract File Format

The system generates the manufacturing extract file at the same time that the system initiates the pick plan.

Note. For manufacturing extract data, the control flags reflect the requirements for the component ID, not the item ID.

<i>Picking Plan Extract File Field Name</i>	<i>Format</i>
Business Unit*	Char 10
Extract Source Flag*	Char 1
Pick Batch ID	Nbr 10
Pick List Line Number	Nbr 5

<i>Picking Plan Extract File Field Name</i>	<i>Format</i>
Sequence Number	Nbr 2
Pick Mode Flag*	Char 1
Production Area	Char 10
Production ID	Char 10
Production Type*	Char 2
Issue Method*	Char 4
Item ID*	Char 40
Item Description 30	Char 30
Item Configuration Code	Char 50
Original Component ID	Char 40
Component ID	Char 40
Component Description 30	Char 30
Component Configuration Code	Char 50
Operation Sequence	Nbr 4
Quantity Code*	Char 3
Required Date*	Char 8
Required Time*	Char 6
Work Center Code	Char 10

<i>Picking Plan Extract File Field Name</i>	<i>Format</i>
Work Center Description	Char 30
To Container ID	Char 10
To Storage Area	Char 5
To Storage Level 1	Char 4
To Storage Level 2	Char 4
To Storage Level 3	Char 4
To Storage Level 4	Char 4
Container ID	Char 10
Storage Area	Char 5
Storage Level 1	Char 4
Storage Level 2	Char 4
Storage Level 3	Char 4
Storage Level 4	Char 4
ASRS ID	Nbr 15
Order/Pick Quantity in Standard UOM	Nbr 11.4
Order/Pick Quantity in Order/Pick UOM	Nbr 11.4
Reserved Quantity in Standard UOM	Nbr 11.4
Reserved Quantity in Location UOM	Nbr 11.4

<i>Picking Plan Extract File Field Name</i>	<i>Format</i>
Available Quantity in Standard UOM	Nbr 11.4
Available Quantity in Location UOM	Nbr 11.4
Standard UOM	Char 3
Order/Pick UOM	Char 3
Location UOM	Char 3
Order/Pick UOM Conversion Rate	Nbr 7.8
Location UOM Conversion Rate	Nbr 7.8
Lot ID	Char 15
Lot Expiration Date	Char 8
Lot Availability Date	Char 8
Serial ID	Char 35
Lot Control Flag	Char 1
Serial Control Flag	Char 1
Staged Date Control Flag	Char 1
Actual Cost Control Flag	Char 1
Maintain Production ID Flag	Char 1
Non Own Flag	Char 1
Original or Reprint Flag*	Char 1

<i>Picking Plan Extract File Field Name</i>	<i>Format</i>
Substitute Flag	Char 1
Date / Time Stamp*	Char 14

Field-Specific Notes

See the field-specific-information that follows.

Business Unit

The Business Unit field permits possible larger sizes to accommodate customer revisions. In general, field sizes should match that within the PeopleSoft COBOL programs. Online pages use the sizes defined within PeopleSoft Data Designer.

Extract Source Flag

0 = Inventory Pick Plan

1 = Manufacturing Pick Plan

Pick Mode Flag

0 = Push

1 = Pull

Production Type

PR = Production

RW = Rework

TD = Teardown

Issue Method

ISS = Issue

REPL = Replenish

KIT = Kit

Item ID

This field permits possible larger sizes to accommodate customer revisions. In general, field sizes should match that within the PeopleSoft COBOL programs. Online pages use the sizes defined within PeopleSoft Data Designer.

Quantity Code

ORD = per Order

ASY = per Assembly

Required Date

The format is CCYYMMDD.

Required Time

The format is HHMMSS.

Original or Reprint Flag

A reprinted extract reflects the current data values in the database. If any pick transactions have been applied between the original and reprinted extract, the data content may differ.

0 = Original

1 = Reprint

Date / Time Stamp

The format is CCYYMMDDHHMMSS.

Part 5

Integrating with Transportation Management Systems

Chapter 11

Integrating with Transportation Management Systems

Chapter 11

Integrating with Transportation Management Systems

This chapter provides an overview of transportation management system (TMS) enterprise integration points (EIP's) and discusses:

- Setting up PeopleSoft system for TMS integration.
- Publishing the TMS order release EIP.
- Understanding TMS processing.
- Publishing the load notification EIP.


Understanding the Transportation Management System Integration with PeopleSoft Inventory

A TMS is used to optimize the grouping of orders into shipments for distribution out of a warehouse. Order information is sent to the TMS and load optimization is performed on the orders to be shipped. The TMS determines the load ID for each of the demand lines. The demand lines are returned to the PeopleSoft fulfillment tables with a load ID.

To support implementations in which a third-party system is used to allow shippers and carriers to maximize space utilization of existing loads, and thereby minimizing shipping costs, PeopleSoft provides two EIPs. These EIPs consist of:

- TMS Order Release—an asynchronous outbound service operation within PeopleSoft Integration Broker that releases orders to a TMS.
- TMS Load Notification—a synchronous service operation (TMS_LOAD_NOTIFICATION_REQ) and an asynchronous inbound service operation (TMS_LOAD_NOTIFICATION) that can load TMS notifications in PeopleSoft Inventory.

This diagram shows the process flow of the integration between PeopleSoft Inventory's demand fulfillment cycle and a third-party TMS system:

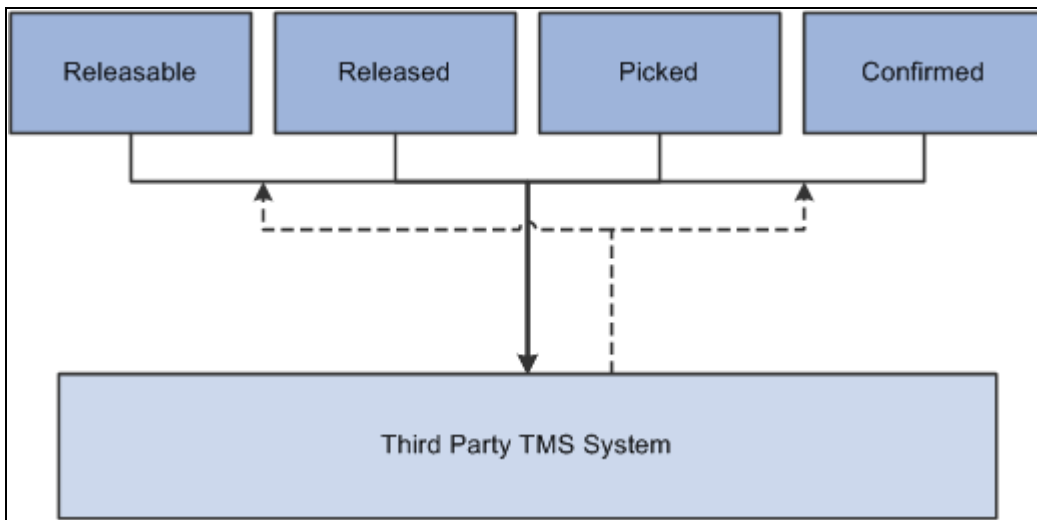

PeopleSoft Inventory to TMS process

Shipment Definition

As it relates to PeopleSoft Inventory and TMS, a shipment is a unit of work that can be thought of as the product to be delivered to a customer, at a specific location, on a specific date, by a specific method of delivery. At most, it is represented by an order in the PeopleSoft system.

Within the order, many factors would determine whether the order is comprised of more than one shipment. For example, the difference in primary fields such as: multiple delivery locations and schedule dates, or specifying different carriers for different demand lines are values that would cause the order to be treated as multiple shipments.

For purposes of load creation in the TMS, outbound information must be organized into logical shipments. A shipment is the distinct combination of these fields:

- BUSINESS_UNIT
- DEMAND_SOURCE
- SOURCE_BUS_UNIT
- ORDER_NO
- SHIP_TO_CUST_ID
- ADDRESS SEQ NUM
- LOCATION
- COUNTRY
- POSTAL
- STATE
- COUNTY
- CITY

- HOUSE_TYPE
- NUM1
- NUM2
- ADDRESS1
- ADDRESS2
- ADDRESS3
- ADDRESS4
- ADDR_FIELD1
- ADDR_FIELD2
- ADDR_FIELD3
- SHIP_CUST_NAME1
- SHIP_CUST_NAME2
- SCHED_DATE / TIME
- SHIP_EARLY_DATE / TIME
- SHIP_LATE_DATE / TIME
- SCHED_ARRV_DTTM
- LOAD_ID
- CARRIER_ID
- SHIP_TYPE_ID
- FREIGHT TERMS

Synchronize Customer and Location Information

In addition to sending order release information to the TMS, you can synchronize customer and location information by using the PeopleSoft Order Management Customer EIPs (service operations starting with CUSTOMER) and the PeopleSoft Inventory Location EIPs (service operations starting with LOCATION).

See Also

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Understanding Order Fulfillment Processing," EIPs for Fulfillment Transactions

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Setting Up Fulfillment at the Business Unit and Item Levels," Defining Transportation Management System (TMS) Interface Options

PeopleSoft Enterprise Application Fundamentals 9.1 PeopleBook, "Defining Financials and Supply Chain Management Common Definitions," Setting Up Freight Carriers

Setting Up PeopleSoft for TMS Integration

This section discusses how to set up PeopleSoft for TMS integration.

Pages Used to Set Up PeopleSoft for TMS Integration

<i>Page Name</i>	<i>Definition Name</i>	<i>Navigation</i>	<i>Usage</i>
Carrier	CARRIER_TBL	Set Up Financials/Supply Chain, Common Definitions, Shipping and Receiving, Carrier Table	Indicate if order lines that have a specific carrier should or should not be downloaded to the TMS system.
Auto Numbering	AUTO_NUM_PNL	Set Up Financials/Supply Chain, Common Definitions, Codes and Auto Numbering, Auto Numbering	To set up the TMS Reference ID numbering scheme, use the Auto Numbering component.
Setup Fulfillment-Transportation Interface page	OF_SETUP_INV	Inventory, Fulfill Stock Orders, Fulfillment Rules, Setup Fulfillment, Transportation Interface	Determine the structure of the TMS data sent to and received by the TMS.

See Also

PeopleSoft Enterprise Application Fundamentals 9.1 PeopleBook, "Defining Financials and Supply Chain Management Common Definitions," Setting Up Freight Carriers

PeopleSoft Enterprise Application Fundamentals 9.1 PeopleBook, "Defining Financials and Supply Chain Management Common Definitions," Setting Up Automatic Numbering

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Setting Up Fulfillment at the Business Unit and Item Levels," Defining Transportation Management System (TMS) Interface Options

Setting up the TMS Integration

Before you can perform the PeopleSoft Inventory to TMS integration, you must:

- Activate the TMS_ORDER_RELEASE, TMS_LOAD_NOTIFICATION, or TMS_LOAD_NOTIFICATION_REQ service operations within PeopleSoft Integration Broker.

See *PeopleSoft Enterprise Inventory 9.1 PeopleBook*, "Understanding Order Fulfillment Processing," Transportation Management System EIPs.

- Activate the associated batch publish rule for the TMS Order Release service operation.

- Set up the carrier table for carriers that should not be sent to the TMS.
- Set up auto numbering for the TMS Reference ID.
- Set up transportation interface options on the Setup Fulfillment page.

Some setup considerations are:

- The lead time needed to send data to the TMS, process data on the TMS, and sending data back to PeopleSoft Inventory.
- Your typical volume of change orders:
 - If you don't have a lot of change orders, you can download demand lines from PeopleSoft to the TMS sooner in the demand fulfillment process. You do not have to create, resend, remove, or cancel transactions from change orders.
 - If you do have a lot of change orders, you may want to download demand lines from PeopleSoft to the TMS later in the demand fulfillment process. This way you can avoid having to create resend, remove, or cancel transactions from changed orders.
- Handling orders that have a carrier assigned prior to downloading to the TMS. As PeopleSoft Order Management allows you to define carrier defaults at a customer and order level, the demand line may have a carrier assigned prior to downloading to the TMS. If you want the TMS to determine the carrier, you will have to decide whether the TMS will ignore the carrier default and assign a new one, or use the carrier default assigned by PeopleSoft applications.

Note. If the TMS is to ignore the carrier, or any other field, that is assigned by PeopleSoft, you must determine this on the TMS or modify the TMS_ORDER_RELEASE service operation.

- Handling updates to the customer, location, UOM, and item weight and volume tables.

See Also

Chapter 3, "Implementing Integrations," Setting Up Service Operations, page 69

Enterprise PeopleTools 8.50 PeopleBook: Integration Broker

Publishing the TMS Order Release EIP

This section provides an overview of the TMS order release process and discusses how to:

- Send TMS data from PeopleSoft Inventory to the TMS.
- Communicate order changes to the TMS.

Understanding the TMS Order Release Process

Demand lines are eligible for the initial download to the TMS:

- If they are in a releasable state, but not shipped.
- If they do not have a TMS External Reference ID assigned to them.
- If they do not have a route number assigned to them.

Demand lines on the PeopleSoft system are pulled from IN_DEMAND. During this process, the table is updated with the TMS External Reference ID and the TMS Reference Line Number, and the TMS process flag is set to "Y." The TMS process flag indicates that the line has been sent to the TMS and is waiting for the load assignment. The TMS External Reference ID is used as the reference number between the PeopleSoft system and the TMS system.

Demand lines are grouped into logical shipments and the TMS utilizes this information to group shipments into a load:

- The TMS External Reference ID and Line Number.
- Demand line information that is related to the order.
- The customer or destination location address.
- Any note or comment information on the order header or line.

New rows of data are added to the TMS system.

Note. The addition of new demand lines to an order, with rows that have already been assigned a TMS External Reference ID and transmitted to the TMS, must be handled as an initial download transaction. If an initial download is initiated, the new line will be selected as a line not having a TMS External Reference ID, and will be assigned a TMS External Reference ID and a TMS Reference Line Number. In other words, if a line is added to an order that has been sent to the TMS, a resend transaction will not add the line to the existing TMS External Reference ID. The initial download will send the new line and a new TMS External Reference ID is assigned to it. If you prefer to combine the new line with the orders' TMS External Reference ID, you must remove the original ID and re-initiate an initial download for the order.


Processing Holds

It is important to understand how the PeopleSoft system processes demand lines that are on hold.

If a demand line is sourced from PeopleSoft Inventory, and the Check for Holds option is selected on the Setup Fulfillment-Transportation Interface page, and it is on hold, then the demand line is not sent to the TMS.

If a demand line is sourced from PeopleSoft Order Management, and the Check for Holds option is selected on the Setup Fulfillment-Transportation Interface page, and the demand line cannot proceed to the next state, then the demand line is not sent to the TMS.

This diagram illustrates an example of a sales order that has lines that are not sent to the TMS. This order contains five lines in different fulfillment states; three are releasable, one is released, and one is confirmed. If PeopleSoft Order Management is set up so that each order line is held at a released state, then lines 1, 2, and 5 will not be sent to the TMS. However, lines 3 and 4 will be sent to the TMS because line 3 is already at a released state, and line 4 is past a released state.

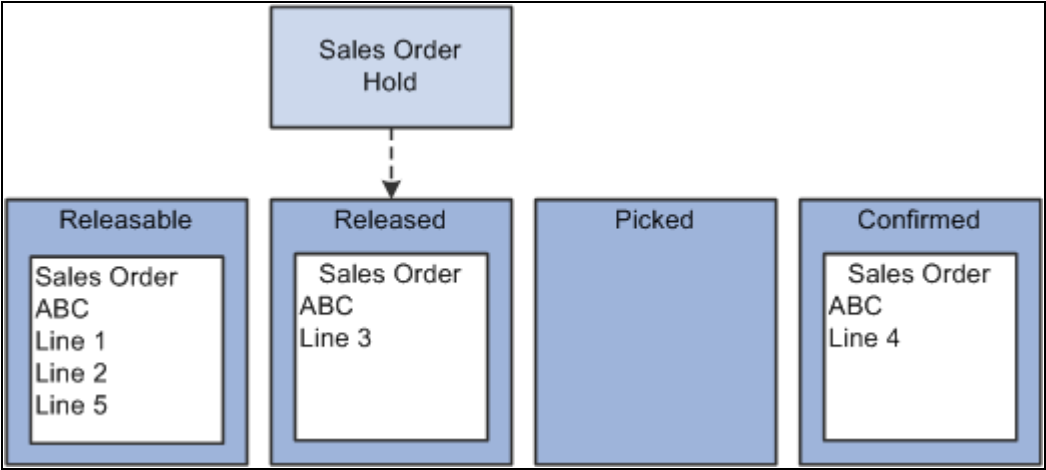

TMS sales order holds

See Also

PeopleSoft Enterprise Order Management 9.1 PeopleBook, "Placing Sales Orders on Hold"

Pages Used to Publish the TMS Order Release EIP

Page Name	Definition Name	Navigation	Usage
Publish Outbound Message	IN_RUN_PUB_MSG	SCM Integrations, Publish Outbound Message	Select the TMS Order Release check box to activate the link.
TMS Order Release Selection Criteria	IN_RUN_TMSREL	Select the TMS Order Release check box on the Publish Outbound Message page, and click the TMS Order Release link.	Select which order lines are to be processed for this run control.

Sending TMS Data from PeopleSoft Inventory to the TMS

Use the TMS_ORDER_RELEASE EIP to send demand data from PeopleSoft Inventory to the TMS.

Access the TMS Order Release Selection Criteria page (SCM Integrations, Publish Outbound Message. Select the TMS Order Release check box on the Publish Outbound Message page, and click the TMS Order Release link).

TMS Order Release Selection Criteria

Run Control ID: Publish Report Manager Process Monitor [Run](#)

Process Request Parameters Find | View All First 1 of 1 Last

*Request ID:	1	Description:		
*Business Unit:	US010	Process Option:	v	☐ Include Cancels
Select By Date:	v	From:	31	To: 31
Demand Source:		Source Unit:		Order Number:
Order Line:		TMS Reference ID:		Location:
Customer ID:		Ship To:		
Carrier ID:		Ship Via:		Pick Batch ID:
☒ Exclude Orders With a Pick ID		☒ Exclude Orders With a Load ID		Inquire Cancels

[OK](#) [Cancel](#)

TMS Order Release Selection Criteria page

Process Option

Select one of these options to run the IN_TMSORDREL application engine process:

Initial Download: Select to send order lines to the TMS for the first time.

Re-send Shipment: Select to send changes to order lines that were previously sent to the TMS.

Remove Shipments: Select to request that all rows of shipment be physically deleted from the TMS system.

Include Cancels

Select this option to remove all rows of a shipment from the TMS. This option is used to remove shipments that have an unfulfilled state in PeopleSoft Inventory or Order Management.

TMS Reference ID

Select a value if you are resending or removing a shipment. This option is used when change orders occur or to identify a specific TMS Reference ID.

Inquire Cancels

Select this link to view all orders that have an unfulfilled state and will be downloaded to the TMS if you select the Include Cancels option.

Note. The TMS Reference ID is created from auto numbering setup on the PeopleSoft system. This ID is assigned to each order line selected during the Publish Outbound Message process.

Communicating Order Changes to the TMS

This section provides an overview of order changes and discusses:

- Using the resend outbound transaction.
- Using the remove outbound transaction.
- Using the cancel outbound transaction.

Understanding Order Changes

Demand lines can change within PeopleSoft Inventory and Order Management after they have been sent to the TMS.

The change may be to a primary field or to a secondary field.

- Examples of a primary field are:
 - The schedule date.
 - The destination location or address.
 - The carrier.
- Examples of a secondary field are:
 - The unit of measure.
 - The quantity.

If a change is made to a demand line that has been sent to the TMS, it is your responsibility to update the TMS.

There are three options to communicate demand changes to the TMS:

- Use the resend outbound transaction.
- Use the remove outbound transaction.
- Use the cancel outbound transaction.

Using the Resend Outbound Transaction

This option is used if changes are made to secondary fields, or if lines are canceled from an order.

A resend transaction provides the ability to send changes to demand lines that were previously sent to the TMS.

The TMS uses an action of *Add* for this transaction and if the TMS External Reference ID exists on the database, it deletes the associated row and adds the new row.

Using the Remove Outbound Transaction

This option is used if changes are made to primary fields, and can be followed by the initial download-outbound transaction.

This transaction is created at the business unit and TMS External Reference ID level.

It requests that all rows for a shipment be physically deleted from the TMS system.

The TMS upload flag and the TMS External Reference ID are initialized for the demand lines for which the delete transaction is performed on the PeopleSoft system.

Using the Cancel Outbound Transaction

This option is used if an order has an unfulfilled state in PeopleSoft Inventory or Order Management.

This transaction is created at the business unit and TMS External Reference ID level.

It requests that all rows for a shipment be physically deleted from the TMS system.

Understanding TMS Processing

In general, the TMS system is typically used to determine these values:

- The best carrier to use for the shipment.
- The best delivery method to use for the shipment.
- The ship date and the arrival date.
- The load ID.
- The stop number.

If multiple shipments are combined into a load, the stop number is used to determine the order to load the delivery container so that it may be unloaded efficiently, that is in the stop order.

The primary fields, sent from the PeopleSoft system, for each line of an order determine how many shipments the TMS will create. Within an order, in general, if it's going to the same customer, the same location, on the same date, using the same ship method, PeopleSoft will consider this one shipment. Auto numbering setup will determine the External Reference ID, which is assigned to the shipment during the download process and used for identification purposes.

Shipment data is typically held in the TMS until one of these conditions are met:

- The TMS has enough information to create a full load.
- The delivery vehicle is full.
- The scheduled ship date is approaching.


Receiving the Load Notification EIP

This section provides an overview of the load notification process and discusses how to:

- Upload TMS data from the TMS to PeopleSoft Inventory.
- View and correct errors.

Understanding the Load Notification EIP Process

This diagram shows the process flow of data from the TMS to PeopleSoft Inventory. The PeopleSoft Integration Broker processes the incoming transaction data from the Load Notification service operation and places the data in the BCT staging tables. The TMS Load Notification process pulls the data from the BCT tables and updates the PeopleSoft Inventory tables: IN_DEMAND and LOAD_INV:

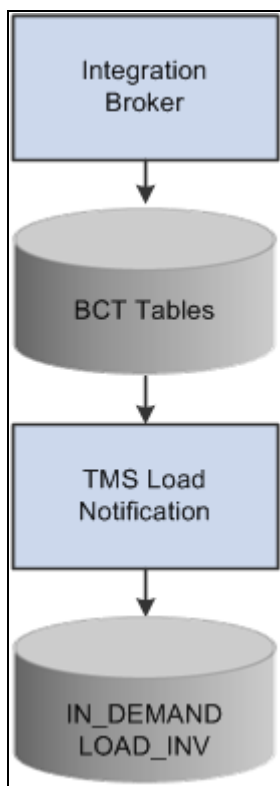

TMS upload integration

Pages Used to Subscribe to the Load Notification EIP

Page Name	Definition Name	Navigation	Usage
TMS Load Notification	BCT_INV_TMSLOAD	SCM Integrations, Process Transactions, Inventory, TMS Load Notification	Launch the IN_TMSUPLOAD Application Engine process, which pulls the TMS transactional data from the BCT tables and updates IN_DEMAND and LOAD_INV.
Transaction Maintenance	BCT_CTL_UPD	SCM Integrations, Transaction Error Handling, Maintain Transactions	View and change the status of error messages found during the TMS Load Notification process.
Transportation Management	BCT_TMS_UPD_INV	Click the EIP Control ID link from the Transaction Maintenance page.	View and correct error messages found during the TMS Load Notification process.

Uploading TMS Data from the TMS to PeopleSoft Inventory

Access the TMS Load Notification page (SCM Integrations, Process Transactions, Inventory, TMS Load Notification).

TMS Load Notification

Run Control ID: Load [Report Manager](#) [Process Monitor](#) [Run](#)

Process Request Parameters Find | View All First 1 of 1 Last

Process Frequency

☐ Once
☐ Always
☒ Don't Run

*Request ID:

Description:

*Unit:

☒ All EIP_CTL_IDs From:

To:

TMS Load Notification page

The TMS_LOAD_NOTIFICATION EIP pulls TMS information from the BCT tables and performs error checking.

Depending on where the order line is within the fulfillment process, this process will find the order line and update these values:

- The load ID.
- The load stop number.
- The shipping method.
- The carrier.
- The shipment dates.

PeopleSoft load management (LOAD_INV) is updated with the load ID, the carrier, the ship method, and the schedule date from the TMS.

If the TMS changes the scheduled arrival date for an interunit MSR that is supply pegged, and is sourced from PeopleSoft Planning or Inventory, an email message is sent notifying the user of the change.

See *PeopleSoft Enterprise Events and Notifications Framework 9.1 PeopleBook*

The TMS Process flag is turned off and the shipment may be processed.

The load ID is an optional field during this process. For example, the TMS may determine that the order should be shipped through an outside carrier. If this occurs, the shipment may be returned to PeopleSoft with the carrier and ship via assigned, but without a load ID.

The TMS can send a delete transaction to PeopleSoft, which will remove all of the load information from demand lines and reset the TMS process flag.

All EIP_CTL_IDs	Select this option to process all EIP control IDs from the BCT tables. This option will process all of the transactional data that has a status of <i>New</i> or <i>Reprocess</i> .
From and To	Enter the specific EIP Control ID. These fields have search buttons when the All EIP_CTL_IDs option is not selected.

Viewing and Correcting Errors

Access the Transaction Maintenance page (SCM Integrations, Transaction Error Handling, Maintain Transactions).

The Transaction Maintenance page reads the BCT tables and is used to view and change the status of error messages that are found during the upload process.

Access the Transportation Management page (Click the EIP Control ID link from the Transaction Maintenance page).

The Transportation Management page provides details of the error message. There can be three levels of message rows; one for the load, one for the order, and one for the line. Each row will display different fields depending on the level of the message.

See Also

Chapter 2, "Understanding PeopleSoft Supply Chain Management Enterprise Integration Points," page 7

Part 6

Integrating with PeopleSoft CRM

Chapter 12

Integrating with PeopleSoft CRM

Chapter 12

Integrating with PeopleSoft CRM

This section provides an overview and discusses integrating PeopleSoft SCM applications with PeopleSoft CRM.

Understanding PeopleSoft SCM Integration with PeopleSoft CRM

You use EIPs to seamlessly integrate your (SCM) applications to PeopleSoft (CRM). While you can use these EIPs to integrate with other technologies, your setup steps can be different if you are integrating to PeopleSoft CRM.

Setting Up CRM EIPs

In general, you need to follow a few more steps used to set up EIPs to integrate with PeopleSoft CRM. These steps are unique to each EIP, and thus are found in the PeopleSoft SCM application documentation for each individual EIP. However, some EIPs use different service operations to integrate with PeopleSoft CRM than to other systems. For example, Item Master uses the ITEM_CRM_SYNC_EFF service operation to integrate with PeopleSoft CRM, and ITEM_SYNC or ITEM_SYNC_EFF to integrate with other applications such as a Warehouse Management System.

Processing Inbound CRM EIPs

In general, you follow a few different steps when subscribing to CRM EIPs.

You load inbound XML-based transactions into the PeopleSoft system using subscription processes that are automatically initiated by PeopleSoft's Integration Broker functionality. Once loaded, the system validates the information and if no errors are found, updates the appropriate PeopleSoft application tables. If errors are found, then the data may be corrected and resubmitted for processing.

Processing Outbound CRM EIPs

You can publish outbound XML-based service operations from different points in the system using PeopleSoft's messaging capabilities. If you are publishing an entire table such as items or customers, you use the one time full data publish utility. If you are publishing incremental update service operations, the system automatically publishes service operations with the data when you save the appropriate component.

Common Object Integrations

This section discusses integration of common objects

Syncing Customers, Contacts, and Products

You synchronize products, customers, and contacts by performing a full table publish to the PeopleSoft Order Capture system. PeopleSoft SCM provides updates to the subscribing system with incremental service operations. Products should be maintained in PeopleSoft SCM and published to PeopleSoft CRM. Customers and Contacts may be maintained in both PeopleSoft SCM and CRM.

PeopleSoft Order Management Integration with PeopleSoft Order Capture

PeopleSoft Order Management and PeopleSoft Order Capture sync customer, contact, and product information. They also sync sales order data.

Submitting Quotes

PeopleSoft Order Capture submits a quote (CRM_QUOTE), which is transformed into a subscribe service operation (SALES_CRM_QUOTE_LOAD) to PeopleSoft Order Management. PeopleSoft Order Management sends an acknowledgement of this quote (SALES_QUOTE_NOTICE) to PeopleSoft Order Capture.

Submitting an Order

PeopleSoft Order Capture submits an order (CRM_SALES_ORDER), which is transformed into a subscribe service operation (SALES_CRM_ORDER_LOAD) to PeopleSoft Order Management. PeopleSoft Order Management sends a Sales Order Acknowledgement to PeopleSoft Order Capture.

Maintaining Existing Orders

PeopleSoft Order Capture sends order changes (CRM_SALES_ORDER_CHANGE) which are transformed into a subscribe message (SALES_CRM_ORDER_CHANGE_LOAD) to PeopleSoft Order Management. PeopleSoft Order Management sends an order change acknowledgement (SALES_ORDER_CHANGE_NOTICE) to PeopleSoft CRM.

Checking Order Status

PeopleSoft Order Capture requests current order and order line status (CRM_ORDER_STATUS), transformed into a service operation (SCM_GET_ORD_STATUS) in PeopleSoft Order Management. PeopleSoft Order Management sends back the order status (SALES_ORDER_STATUS) to PeopleSoft Order Capture.

Checking Product Availability

PeopleSoft Order Capture requests product availability information (SCM_GET_PROD_AVAIL) from PeopleSoft SCM.

Shipping an Order

PeopleSoft Order Capture receives advanced shipping notices (ADVANCED_SHIPPING_NOTICE) from PeopleSoft Inventory.

PeopleSoft Billing Integration with PeopleSoft CRM 360 Degree View

PeopleSoft CRM requests and receives invoice information from PeopleSoft Billing.

See Also

PeopleSoft Enterprise CRM 9.1 Application Fundamentals PeopleBook

PeopleSoft Enterprise Billing 9.1 PeopleBook, "Integrating PeopleSoft CRM with Billing"

PeopleSoft SCM Integration with PeopleSoft FieldService

PeopleSoft CRM FieldService requires real-time item balance and availability checks with PeopleSoft Inventory and Purchasing. Inventory sends information to FieldService, including Inventory business units as storage locations for field service trucks and items.

See Also

PeopleSoft Enterprise Integrated FieldService 9.1 PeopleBook

Using CRM EIPs

You use individual EIPs to integrate SCM applications with CRM applications.

CRM EIPs

You can use the following EIPs to integrate with PeopleSoft CRM:

EIP	Technical Name	Functional Definition	SCM Application	CRM Application	Reference
Advanced Shipping Notice	ADVANCED_SHIPPING_NOTICE	Inventory sends PeopleSoft CRM notification that sales orders have been shipped.	Inventory	FieldService, Order Capture	<i>PeopleSoft Enterprise Integrated FieldService 9.1 PeopleBook</i> See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i>, "Understanding Order Fulfillment Processing," Advanced Shipping Notice EIP.
Bill Source	BILL_SOURCE_FULLSYNC BILL_SOURCE_SYNC	Syncs bill source information with PeopleSoft CRM.	Billing		<i>PeopleSoft Enterprise CRM 9.1 Application Fundamentals PeopleBook</i> See <i>PeopleSoft Enterprise Billing 9.1 PeopleBook</i>, "Integrating PeopleSoft CRM with Billing."
Bill Type	BILL_TYPE_FULLSYNC BILL_TYPE_SYNC	Syncs bill type information with PeopleSoft CRM	Billing		<i>PeopleSoft Enterprise CRM 9.1 Application Fundamentals PeopleBook</i> See <i>PeopleSoft Enterprise Billing 9.1 PeopleBook</i>, "Integrating PeopleSoft CRM with Billing."
Contact	CONTACT_SYNC_EFFECT, CONTACT_FULLSYNC_EFFECT	Syncs contact information with PeopleSoft CRM.	SCM	CRM Common	<i>PeopleSoft Enterprise CRM 9.1 Application Fundamentals PeopleBook</i> See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i>, "Maintaining Contacts."

EIP	Technical Name	Functional Definition	SCM Application	CRM Application	Reference
CRM 360 Degree View	BI_EIP360_REQ BI_EIP360_RSP	CRM requests billing information (bills) from PeopleSoft Billing to display in the 360-Degree View. PeopleSoft Billing responds with the billing information requested from the PeopleSoft CRM 360-Degree View	Billing	CRM Common	<i>PeopleSoft Enterprise CRM 9.1 Application Fundamentals PeopleBook</i> <i>See PeopleSoft Enterprise Billing 9.1 PeopleBook, "Integrating PeopleSoft CRM with Billing."</i>
Customer	CUSTOMER_FULLSYNC, CUSTOMER_SYNC	Syncs customer information with PeopleSoft CRM.	SCM	CRM Common	<i>PeopleSoft Enterprise CRM 9.1 Application Fundamentals PeopleBookk</i> <i>See PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook, "Maintaining General Customer Information," Understanding Enterprise Integration Points.</i>
Customer Group	CUSTOMER_GROUP_FULLSYNC, CUSTOMER_GROUP_SYNC	Syncs customer group information with PeopleSoft CRM.	SCM	CRM Common	<i>PeopleSoft Enterprise CRM 9.1 Application Fundamentals PeopleBook</i> <i>See PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook, "Maintaining General Customer Information," Understanding Enterprise Integration Points.</i>

EIP	Technical Name	Functional Definition	SCM Application	CRM Application	Reference
InterUnit Receipt	INTERUNIT_RECEIPT	Updates the status of interunit receipts to indicate whether the quantity on the receipt has been received.	Inventory	FieldService	<i>PeopleSoft Enterprise Integrated FieldService 9.1 PeopleBook</i> See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i>, "Receiving and Putting Away Stock," Staging Interunit Transfers Using an Electronic Data Collection System.
Inventory Adjustment	INVENTORY_ADJUSTMENT	Loads inventory adjustments.	Inventory	FieldService	<i>PeopleSoft Enterprise Integrated FieldService 9.1 PeopleBook</i> See <i>PeopleSoft Enterprise Inventory 9.1 PeopleBook</i>, "Making Stock Quantity Adjustments and Transfers Within the Business Unit," Making Adjustments Using the Inventory Adjustment EIP.
Inventory Item Balance	IN_ITEM_BALANCES	Queries inventory item balance.	Inventory	FieldService	<i>PeopleSoft Enterprise Integrated FieldService 9.1 PeopleBook</i>

EIP	Technical Name	Functional Definition	SCM Application	CRM Application	Reference
Item Master	ITEM_CRM_FULLSYNC_EFF, ITEM_CRM_SYNC_EFF	Syncs item information with PeopleSoft CRM.	Inventory	FieldService	<i>PeopleSoft Enterprise Integrated FieldService 9.1 PeopleBook</i> See <i>PeopleSoft Enterprise Managing Items 9.1 PeopleBook</i>, "Loading Items," Setting Up the Item Master EIP.
Order Status	OM_ORDER_STATUS	Order Capture requests current order and order line status from Order Management.	Order Management	Order Capture	<i>PeopleSoft Enterprise CRM 9.1 Order Capture Applications PeopleBook</i>
Product	PRODUCT_GROUP_FULLSYNC, PRODUCT_SYNC	Syncs product information with PeopleSoft CRM.	Order Management	Order Capture	<i>PeopleSoft Enterprise CRM 9.1 Order Capture Applications PeopleBook</i> See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i>, "Setting Up Products," Understanding Product Load EIPs.

EIP	Technical Name	Functional Definition	SCM Application	CRM Application	Reference
Product Configurator Data Sync	CP_CONSTANT_FULLSYNC, CP_CONSTRAINT_FULLSYNC, , CP_EXPRESSION_FULLSYNC, CP_GLOBAL_FULLSYNC, CP_INTRN_VAR_FULLSYNC, CP_MATRIX_FULLSYNC, CP_MESSAGED_FULLSYNC, CP_MULTOP_FULLSYNC, CP_OPTION_FULLSYNC, CP_PRINTCD_FULLSYNC, CP_RULE_FULLSYNC, CP_SECONDARY_FULLSYNC, CP_TEMPLATE_FULLSYNC, CP_TREE_FULLSYNC, CP_VALUE_LIST_FULLSYNC	Syncs configuration information with PeopleSoft CRM.	Product Configurator	Order Capture	<i>PeopleSoft Enterprise CRM 9.1 Order Capture Applications PeopleBook</i> <i>See PeopleSoft Enterprise Product Configurator 9.1 PeopleBook, "Synchronizing PeopleSoft Product Configuration Data."</i>
Product Availability	PSPRODAVAIL	Order Capture queries product availability from Order Management.	Inventory	Order Capture	<i>PeopleSoft Enterprise CRM 9.1 Order Capture Applications PeopleBook</i> <i>See PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Inquiring and Reporting About On-Hand Stock," Providing Item Availability Checks to Third-Party Systems.</i>

EIP	Technical Name	Functional Definition	SCM Application	CRM Application	Reference
Product Group	PRODUCT_GROUP_FULLSYNC, PRODUCT_SYNC	Syncs product group information with PeopleSoft CRM.	Order Management	Order Capture	<i>PeopleSoft Enterprise CRM 9.1 Order Capture Applications PeopleBook</i> <i>See PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook, "Setting Up Products," Understanding Product Load EIPs.</i>
Purchase Order and Interunit Transfer Information	RF_GETPOIUT	Queries PO and IUT Information from CRM	Inventory	FieldService	<i>PeopleSoft Enterprise Integrated FieldService 9.1 PeopleBook</i>
Purchase Order Receipt	PURCHASE_ORDER_RECEIPT	Updates the status of purchase order receipts to indicate whether the quantity on the receipt has been received.	Purchasing	FieldService	<i>PeopleSoft Enterprise Integrated FieldService 9.1 PeopleBook</i> <i>See PeopleSoft Enterprise Purchasing 9.1 PeopleBook, "Receiving Shipments."</i>
Purchase Order Requisition	PURCHASE_ORDER_REQUISITION_CRM	Loads requisition data from PeopleSoft CRM.	Purchasing	CRM Common	<i>PeopleSoft Enterprise CRM 9.1 Application Fundamentals PeopleBook</i> <i>See PeopleSoft Enterprise Purchasing 9.1 PeopleBook, "Creating Requisitions Online."</i>

EIP	Technical Name	Functional Definition	SCM Application	CRM Application	Reference
Sales Order	PSGETID	Order Capture calls this EIP to get the next order number from OM.	Order Management	Order Capture	<i>PeopleSoft 9.1 CRM Collaborative Selling PeopleBook</i> <i>See PeopleSoft Enterprise Order Management 9.1 PeopleBook, "Using Sales Order and Quotation Enterprise Integration Points."</i>
Sales Order Acknowledgement	SALES_ORDER_ACKNOWLEDGEMENT	Order Management publishes an acknowledgment indicating that an order has been received.	Order Management	Order Capture	<i>PeopleSoft Enterprise CRM 9.1 Order Capture Applications PeopleBook</i> <i>See PeopleSoft Enterprise Order Management 9.1 PeopleBook, "Using Sales Order and Quotation Enterprise Integration Points."</i>
Sales Order Change	SALES_CRM_ORDER_CHANGE_LOAD	Order Management publishes an acknowledgment of changes made to an order that was created using the Sales Order or CRM Sales Order message.	Order Management	Order Capture	<i>PeopleSoft Enterprise CRM 9.1 Order Capture Applications PeopleBook</i> <i>See PeopleSoft Enterprise Order Management 9.1 PeopleBook, "Using Sales Order and Quotation Enterprise Integration Points."</i>

EIP	Technical Name	Functional Definition	SCM Application	CRM Application	Reference
Sales Order Load	SALES_CRM_ORDER_LOAD, SALES_CRM_QUOTE_LOAD	Order Management loads sales order header, line and shipment information from Order Capture.	Order Management	Order Capture	<i>PeopleSoft Enterprise CRM 9.1 Order Capture Applications PeopleBook</i> See <i>PeopleSoft Enterprise Order Management 9.1 PeopleBook</i>, "Using Sales Order and Quotation Enterprise Integration Points."
Sales Order Notice	SALES_ORDER_CHANGE_NOTICE	Dispatches a sales order.	Order Management	Order Capture	<i>PeopleSoft Enterprise CRM 9.1 Order Capture Applications PeopleBook</i> See <i>PeopleSoft Enterprise Order Management 9.1 PeopleBook</i>, "Using Sales Order and Quotation Enterprise Integration Points."
Sales Order Status	SALES_ORDER_STATUS	Publish sales order information, including the order tracking status.	Order Management	Order Capture	<i>PeopleSoft Enterprise CRM 9.1 Order Capture Applications PeopleBook</i> See <i>PeopleSoft Enterprise Order Management 9.1 PeopleBook</i>, "Using Sales Order and Quotation Enterprise Integration Points."

EIP	Technical Name	Functional Definition	SCM Application	CRM Application	Reference
Sales Quote Notice	SALES_QUOTE_NOTICE	Order Management sends a quote acknowledgment to Order Capture.	Order Management	Order Capture	<i>PeopleSoft Enterprise CRM 9.1 Order Capture Applications PeopleBook</i> See <i>PeopleSoft Enterprise Order Management 9.1 PeopleBook</i>, "Using Sales Order and Quotation Enterprise Integration Points."
Standard Note	STD_NOTE_FULLSYNC, STD_NOTE_SYNC	Syncs standard note information with PeopleSoft CRM.	Order Management	CRM Common	<i>PeopleSoft Enterprise CRM 9.1 Application Fundamentals PeopleBook</i> See <i>PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook</i>, "Maintaining Additional Customer Information," Setting Up Standard Notes.
Tax Codes	TAX_HEADER_TBL_FULLSYNC	Syncs tax code information with PeopleSoft CRM	Billing		<i>PeopleSoft Enterprise CRM 9.1 Application Fundamentals PeopleBook</i> See <i>PeopleSoft Enterprise Billing 9.1 PeopleBook</i>, "Integrating PeopleSoft CRM with Billing."

Part 7

Integrating with Advanced Planning Products

Chapter 13

Integrating with Supply Chain Business Modeler

Chapter 14

Integrating with Oracle's Demantra Demand Management

Chapter 13


Integrating with Supply Chain Business Modeler

This chapter provides an overview of the PeopleSoft Supply Chain Management integration with the Supply Chain Business Modeler and discusses how to:

- Export data to Supply Chain Business Modeler.
- Import data from Supply Chain Business Modeler.

Understanding the PeopleSoft Supply Chain Management Integration with the Supply Chain Business Modeler

This diagram illustrates the integration between PeopleSoft Supply Chain Management and the Supply Chain Business Modeler. PeopleSoft Supply Chain Management integrates with the Supply Chain Business Modeler (a part of Supply Chain Planning) by passing a wide range of supply chain data to the Supply Chain Business Modeler in the form of XML documents:

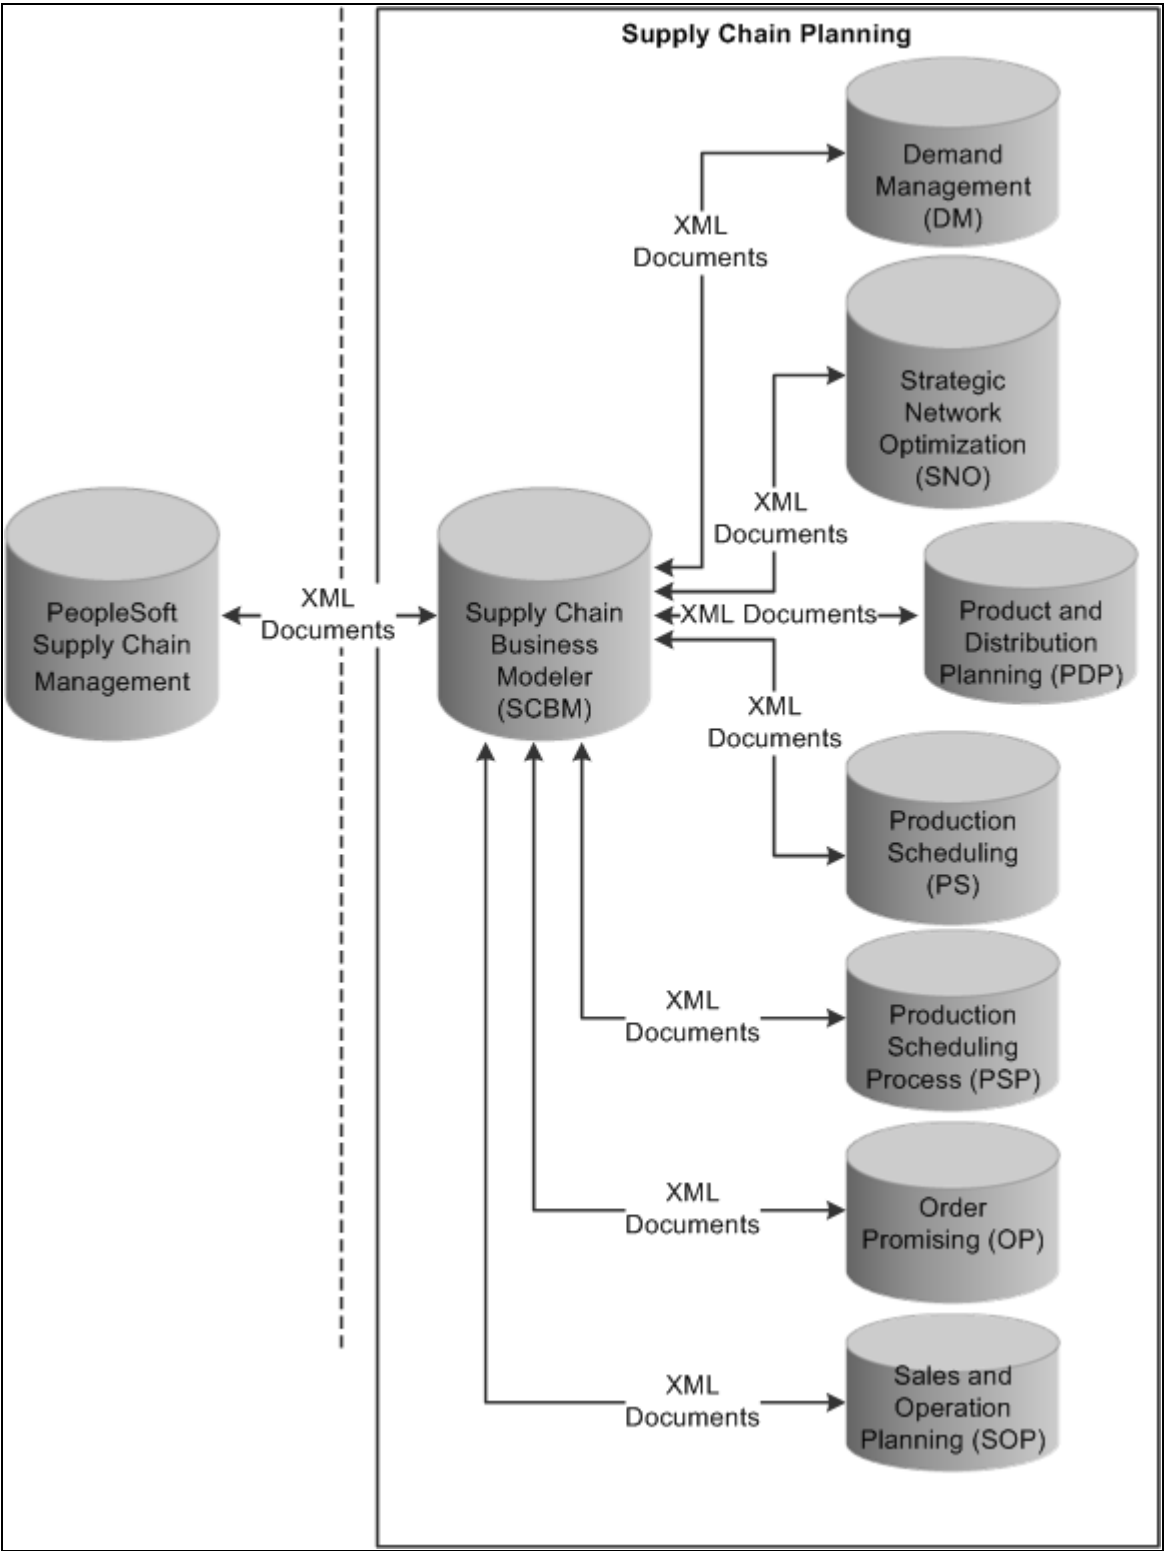

PeopleSoft Supply Chain Management Integration with Supply Chain Business Modeler

The data that is passed through the XML documents is not planning-model specific but rather a base representation of data that will be used by various planning models. The Supply Chain Business Modeler is a central planning data repository for the Supply Chain Planning Products (Demand Management (DM), Strategic Network Optimization (SNO), Production and Distribution Planning (PDP), Production Scheduling (PS), Production and Scheduling Process (PSP), Order Promising (OP), and Sales and Operation Planning (SOP).

Once the supply chain management data resides within the Supply Chain Business Modeler it is then used to build tactical, operational, or strategic planning models and model partitions. The model partitions are used to generate data needed for specific Supply Chain Planning products. After the Supply Chain Planning products are done with their analysis they then pass their individual information (plans) back to the Supply Chain Business Modeler.

At that point, once again PeopleSoft Supply Chain Management integrates with the Supply Chain Business Modeler by importing that planning data back into PeopleSoft Supply Chain Management and acting upon the recommendations from the planning products.

PeopleSoft Predefined XML Documents

PeopleSoft provides the following predefined XML documents for exporting data from PeopleSoft Supply Chain Management to Supply Chain Business Modeler:

<i>XML Document</i>	<i>Associated Data</i>
Configuration	Model parameters
Calendar	Calendar
Base	• Item • Standard UOM (unit of measure) • Item UOM (unit of measure) • Item Group • Branch • Branch Group • Storage • Storage Requirement Set • Item Storage • Item Branch • Inventory Policy
Distribution	• Lane • Transport Mode • Item Transport Mode

<i>XML Document</i>	<i>Associated Data</i>
Supplier	• Supplier • Supplier Item
Customer	Customer
Manufacturing	• Operation • Produced Item • Produced Item BOM (bills of material) • Consumed Item BOM (bills of material) • Operation BOR (bill of resources) • Routing • Operation Set • Branch Operation Set • Temporal Relation • Branch Operation • Branch Routing • Resource • Crew • Machine • Tool • Consumed Item Set • Resource Set
Forecasts	• Enterprise Forecast • Enterprise Forecast Detail
Sales Orders	• Sales Orders • Sales Order Details
Sales Order History	Sales Order History
Transfer Orders	• Transfer Order • Transfer Order Detail

<i>XML Document</i>	<i>Associated Data</i>
Beginning Inventory	Beginning Inventory
Work Orders	• Work Order • Work Order Routing • Work Order Parts List
Purchase Orders	• Purchase Order • Purchase Order Detail
Safety Parameters	Safety Parameters
Inventory Safety Targets	Inventory Safety Targets

PeopleSoft provides the following predefined XML documents for import data from Supply Chain Business Modeler:

<i>XML Document</i>	<i>Associated Data</i>
Purchase Order	Information for the XML document is extracted from the Supply Chain Business Modeler. Data in this document is used to establish a picture of existing purchase orders sent to the Supply Chain Business Modeler. This picture of the existing orders will be used to populate original order data in the planning instance tables and also be used to identify orders that will be marked as canceled as a result of the optimized plan. Any order sent into the Supply Chain Business Modeler but not received back on a purchase order recommendation out of the Supply Chain Business Modeler will assumed to be canceled.
Transfer Orders	Information for the XML document is extracted from the Supply Chain Business Modeler. Data in this document is used to establish a picture of existing transfer orders sent to the Supply Chain Business Modeler. This picture of the existing orders will be used to populate original order data in the planning instance and also identify orders that will be marked as canceled as a result of the optimized plan. Any order sent into the Supply Chain Business Modeler but not received back on a net deployment out of the Supply Chain Business Modeler will assumed to be canceled.

XML Document	Associated Data
Work Orders	Information for the XML document is extracted from the Supply Chain Business Modeler. Data in this document is used to establish a picture of existing production orders sent to the Supply Chain Business Modeler. This picture of the existing orders will be used to populate original order data in the planning instance and also identify orders that will be marked as canceled as a result of the optimized plan. Any order sent into the Supply Chain Business Modeler but not received back on either a net production requirement or a production schedule out of the Supply Chain Business Modeler will assumed to be canceled.
Enterprise Forecast	The Enterprise Forecast XML document contains forecast information that was generated by Demand Management (DM). Only inventoried items are sent to the Supply Chain Business Modeler as a part of the standard integration so it is assumed that only Inventory Item forecast will be received out of the Supply Chain Business Modeler.
Net Deployment Requirements	The Net Deployment Requirements XML document contains information about inventory transfers between two business units and represents results out of the Production and Distribution Planning (PDP). Details for net deployments may contain data for existing transfers as well as new inter unit transfer requirements.
Net Production Requirements	The Net Production Requirements XML document contains information about production requirements for an item at a given branch and represents the results out of the Production and Distribution Planning (PDP). Details for net production requirements may contain data for existing production as well as new production requirements.
Production Schedules	The Production Schedule XML document contains detailed production information including specific operations, resources, and material to use in the manufacturing process. Production schedule information can be produced by Production and Distribution Planning and production schedule information can also be produced by Production Scheduling (PS) and Production Scheduling Process (PSP). Production Schedules may contain both existing and new production.
Purchase Order Recommendations	The purchase order recommendations XML document contains information regarding purchases that need to be made based on predefined supplier/item relationships. Purchase order recommendations can be produced by Production and Distribution Planning. The information may contain both new and existing purchase orders.

See Also

PeopleSoft Enterprise Supply Planning 9.1 PeopleBook, "Committing PeopleSoft Supply Planning Updates," Posting PeopleSoft Supply Planning Updates to the Transaction System

JD Edwards EnterpriseOne Supply Chain Planning Supply Chain Business Modeler 9.0 Implementation Guide

JD Edwards EnterpriseOne Supply Chain Planning Strategic Network Optimization 9.0 Implementation Guide

JD Edwards EnterpriseOne Supply Chain Planning Production and Distribution Planning 9.0 Implementation Guide

JD Edwards EnterpriseOne Supply Chain Planning Production Scheduling 9.0 Implementation Guide

JD Edwards EnterpriseOne Supply Chain Planning Demand Management Consensus Conference Room 9.0 Implementation Guide

JD Edwards EnterpriseOne Supply Chain Planning Demand Management Design Studio 9.0 Implementation Guide

JD Edwards EnterpriseOne Supply Chain Planning Demand Management Forecast Studio 9.0 Implementation Guide

Exporting Data to Supply Chain Business Modeler

This section discusses how to export data to Supply Chain Business Modeler.

Page Used to Export Data to Supply Chain Business Modeler

<i>Page Name</i>	<i>Definition Name</i>	<i>Navigation</i>	<i>Usage</i>
Export data to SCBM	APS_OUT_RUN	SCM Integrations, Advanced Planning, Export data to SCBM	Initiate the Export data to SCBM - Single Application Engine process (APS_O_MAIN) or initiate the Export data to SCBM - Multi Application Engine process (APS_OUT). Both of these processes export the XML documents from PeopleSoft Supply Chain Management to the Supply Chain Business Modeler. The Export Data to SCBM - Single process runs the XML documents serially where as the Export Data to SCBM - Multi process allows for the XML documents to be generated in parallel and can take advantage of multiple CPU environments.

Exporting Data to Supply Chain Business Modeler

Access the Export data to SCBM page (SCM Integrations, Advanced Planning, Export data to SCBM).

Export data to SCBM

Run Control ID: **Export** [Report Manager](#) [Process Monitor](#) [Run](#)

Fences

Current Option: **Offset** Current Offset: **0**

Start: **-30** End: **365** History Start:

Filters

*Item SetID:

☐ Include Quotes
Quote %

☐ Reverse Quarantine Quantity

☒ Freeze Pegged Orders

Global Defaults

*Base Currency: *Rate Type:

Constrained Item Fence:

Fixed Production Fence:

Item Group Option:

Model Documents

☒ Configuration	☒ Distribution	☒ Forecasts	☒ Beginning Inventory
☒ Calendar	☒ Supplier	☒ Sales Order	☒ Work Orders
☒ Base	☒ Customer	☒ Sales Order History	☒ Purchase Orders
☒ Manufacturing	☒ Transfer Orders	☒ Safety Parameters	

☒ [Select All](#) ☐ [Clear All](#)

*Write export file to:

Export data to SCBM page

Fences

Current Option Select how you want to specify the current date. You can enter a specific date or an offset in days from the system date. Values are:

- *Date*
- *Offset*

Current Date Select the current date. This field is available if you select *Date* as the Current Option.

Current Offset Enter the current offset in days. This field is available if you select *Offset* as the Current Option.

Start Enter the start fence in days from the current time. This value can be negative and the start fence must be less than or equal to the current time.

End Enter the end fence in days from the current time. This value can be negative and the end fence must be greater than the current time.

History Start Enter the history start fence in days from the current time. This value can be negative and the history start fence must be less than current time.

The system will only use the history start fence when selecting data for the Sales Order History XML Document.

Filters

Item Set ID Select the item Set ID for the data that you would like to export to Supply Chain Business Modeler.

Include Quotes Select this check box if you want to include quotes in the data that is passed to the Supply Chain Business Modeler.

Quote % (quote percentage) If you select to include quotes, then enter the quote percentage to include. Quotes with an acceptance percentage equal to or greater than the value entered will be included in the data sent to the Supply Chain Business Modeler.

Reverse Quarantine Qty (reverse quarantine quantity) Select this check box if you want to reverse the quarantine quantity from the quantity on hand that is sent to the Supply Chain Business Modeler using the Base XML document.

Global Defaults

Base Currency Select a base currency. This currency and rate are used for formatting costs and prices into a common currency within Supply Chain Business Modeler.

Rate Type Select a rate type. This currency and rate are used for formatting costs and prices into a common currency within Supply Chain Business Modeler.

Constrained Time Fence Enter a constrained time fence in number of days. This value must be greater than or equal to zero. The Base XML Document uses this value to populate the constrained item fence value directly on the Item Branch attribute.

Fixed Production Fence Enter a fixed production fence in number of days. This value must be greater than or equal to zero. The Base XML Document uses this value to populate the fixed production fence attribute on machines, crews, and tools directly.

Item Group Option Select how you want to control formatting of the item group within Supply Chain Business Modeler. Values are:

- *Family*: Item Family
- *Group*: Item Group

Model Documents

**Configuration,
Calendar, Base,
Distribution, Supplier,
Customer,
Manufacturing,
Forecasts, Sales Orders,
Sales Order History,
Transfer Orders,
Beginning Inventory,
Work Orders, Purchase
Orders, and Safety
Parameters**

Select the check box next to each of the different types of XML documents that you want to have created and exported to the Supply Chain Business Modeler.



Click the **Select All** button to select all of the XML Documents at once.



Click the **Clear All** button to clear the selection of any XML Documents.

Write Export Files To

Enter the output directory, folder, or URL for the exported XML Documents.

Importing Data From Supply Chain Business Modeler

This section discusses how to import data from Supply Chain Business Modeler.

Page Used to Import Data From Supply Chain Business Modeler

Page Name	Definition Name	Navigation	Usage
Import data from SCBM	APS_IN_RUN	SCM Integrations, Advanced Planning, Import data from SCBM	Initiate the Import data from SCBM - Single Application Engine process (APS_I_MAIN) or initiate the Import data from SCBM - Multi Application Engine process (APS_IN). Both of these processes import the XML documents from the Supply Chain Business Modeler to PeopleSoft Supply Chain Management. The Import data from SCBM - Single process runs the XML documents serially where as the Import data from SCBM - Multi process allows for the XML documents to be generated in parallel and can take advantage of multiple CPU environments.

Importing Data From Supply Chain Business Modeler

Access the Import data from SCBM page (SCM Integrations, Advanced Planning, Import data from SCBM).

Import data from SCBM

Run Control ID: Import [Report Manager](#) [Process Monitor](#) [Run](#)

Update Planning Data

☒ Published Forecast

☒ Planning Instance

Planning Instance:

☒ Net Deployment Requirements ☒ Net Production Requirements

☒ Purchase Order Recommendations ☒ Production Schedule

*Import files from:

Import data from SCBM page

Published Forecast	Select this check box if you want to want to update published forecast planning data to PeopleSoft Supply Chain Management.
Planning Instance, Planning Instance	Select this check box if you want to update a particular planning instance of planning data to PeopleSoft Supply Chain Management. Then enter the planning instance in the Planning Instance field.
Net Deployment Requirements	If you select to update by planning instance, then select this check box if you want to import net deployment requirements.
Net Production Requirements	If you select to update by planning instance, then select this check box if you want to import net production requirements.
Purchase Order Recommendations	If you select to update by planning instance, then select this check box if you want to import purchase order recommendations.
Production Schedule	If you select to update by planning instance, then select this check box if you want to import the production schedule.
Import Files From	Enter the location of the XML documents that you want to import.

Chapter 14

Integrating with Oracle's Demantra Demand Management

This chapter provides an overview of Demantra integration and discusses how to:

- Set up calendars and weight profiles.
- Build demand history.
- Map fields for exporting to Demantra.
- Export demand history.
- Review demand history.
- Import forecast data.
- Review and update imported forecast.

Understanding Demantra Integration

This section discusses:

- PeopleSoft Advanced Planning - Demantra processes.
- Information flow between PeopleSoft and Demantra Demand Management.

Oracle's Demantra Demand Management Integration, enables you to use the Demantra Demand Management system in conjunction with PeopleSoft's demand history data, Inventory, Supply Planning, and Inventory Policy Planning. Demantra Demand Management is a configurable, web-based product that helps an organization perform demand planning and forecasting. The product provides access to historical and other reference data.

Using the Advanced Planning, Demantra component, you can manage the integration of data between PeopleSoft and Demantra Demand Management. You can establish and maintain demand history data and export this data to the Demantra planning system using an Oracle Process Integration Package (PIP). The system can then generate forecasts using the Demantra Demand Management application and its forecasting calculations. After forecasts have been generated in Demantra, you can:

1. Export the forecast from Demantra to a flat file using the Process Integration Package.
2. Import the forecast flat file back into PeopleSoft using the Import Forecast component.

After the forecasts have been imported into PeopleSoft they are then available for use by other PeopleSoft applications.

This chapter only provides details about the PeopleSoft Supply Chain Management Integrations component. For more information about using integration processes and programs, review these documents.

- Oracle Application Integration Architecture Release 1.0, *Oracle Value Chain Planning Integration to JD Edwards EnterpriseOne Implementation Guide*.
- Oracle Application Integration Architecture Release 1.0, *Oracle Value Chain Planning Integration to JD Edwards EnterpriseOne Installation Guide*.
- Oracle Application Integration Architecture Release 1.0, *Oracle Value Chain Planning Integration to JD Edwards EnterpriseOne Release Notes*.

PeopleSoft Advanced Planning - Demantra Processes

The setup and processing of data to be exported to and imported from Demantra Demand Management is accomplished using the Advanced Planning - Demantra component. Using the component you:

- Create calendars and weight profiles.

You use calendars and weight profiles to define different period buckets and weights for each day and are passed to Demantra using the Process Integration Package.

See [Chapter 14, "Integrating with Oracle's Demantra Demand Management," Setting Up Calendar and Weight Profiles, page 267.](#)

- Create a map ID that maps PeopleSoft fields to Demantra integration file fields.

This map is used to define which data is passed from PeopleSoft to Demantra Demand Management for use in forecast generation.

See [Chapter 14, "Integrating with Oracle's Demantra Demand Management," Mapping PeopleSoft Fields To Demantra Fields, page 275.](#)

- Build demand history from PeopleSoft application internal data.

Internal data is transactional data that consists of demand quantities, dates, costing information, and attributes that are related to the product, item, location, and customers and so on.

See [Chapter 14, "Integrating with Oracle's Demantra Demand Management," Building and Reviewing Demand History, page 280.](#)

- Create specifications and run controls to import forecast data from Demantra Demand Management.

This data is used to publish forecast information and populate existing publish tables for PeopleSoft applications.

See [Chapter 14, "Integrating with Oracle's Demantra Demand Management," Importing Data from Demantra, page 292.](#)

- Review imported forecast information.


See [Chapter 14, "Integrating with Oracle's Demantra Demand Management," Reviewing and Updating Imported Forecasts, page 296.](#)

Information Flow Between PeopleSoft and Demantra

To support the use of the Demantra Demand Management application, system administrators need to install the application and users must be familiar with the application's setup and use.

The Oracle Process Integration Package also needs to be installed, setup, and configured and users must be familiar with this as details are not provided by PeopleSoft.

The next example illustrates the processing steps required to integrate PeopleSoft with Demantra Demand Management:

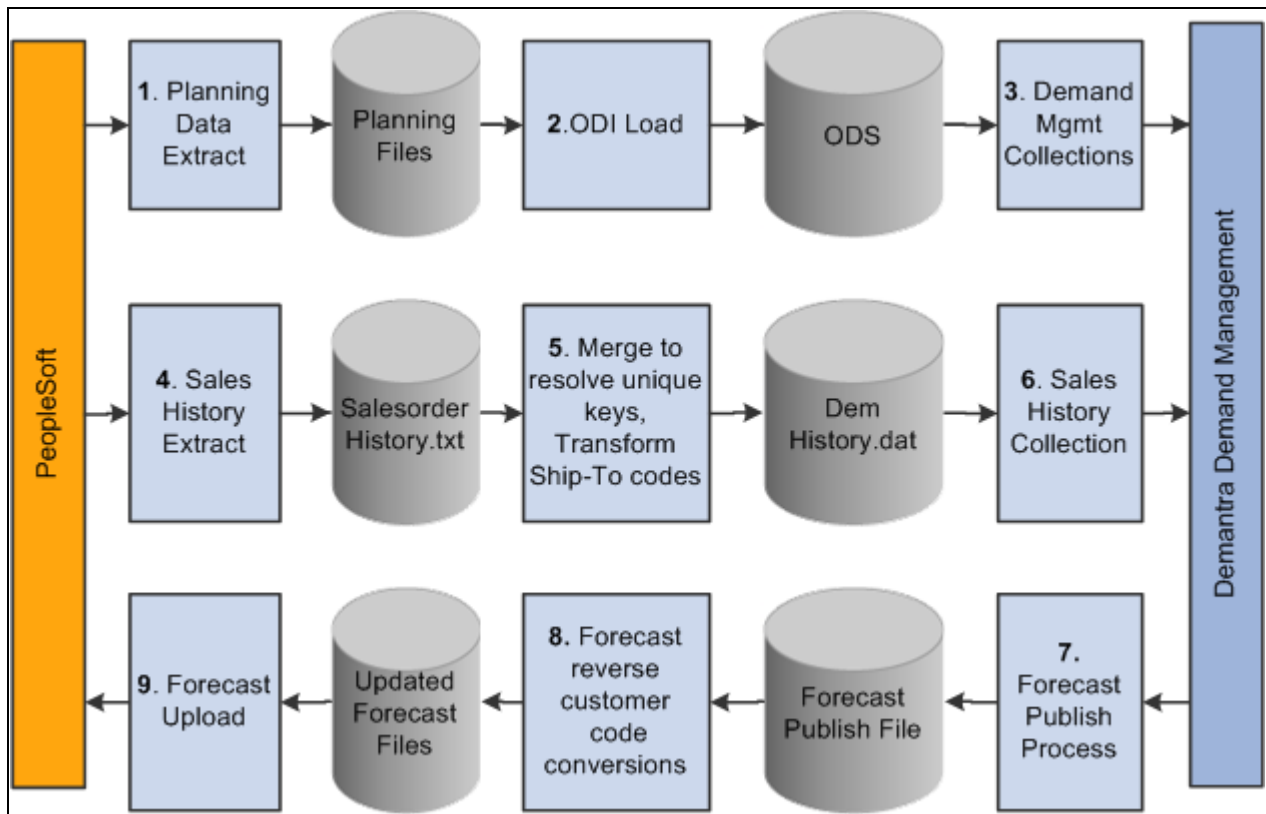

Exporting demand and importing forecast data processing steps

The process for exchanging files between PeopleSoft and Demantra Demand Management includes:

1. Extracting planning data.

This is performed in PeopleSoft using the Base, Customer, and Calendar Export options. The system uses data in the demand history to populate the base.xml, customer.xml and calendar.txt files that are required by the Process Integration Package.

2. Loading data into the Oracle Data Integrator (ODI).

The system processes base, customer, and calendar files and loads data into ODI using the Process Integration Package.

3. Collecting demand management item, organization, and customer data

The data is loaded from the On-Disk Structure (ODS) into Demantra using the Process Integration Package.

4. Extracting sales history.

Using the Sales Export option in PeopleSoft, the system extracts sales history data from the demand history to populate the SalesOrderHistory.txt file.

5. Merging and resolving unique keys and transforming ship-to codes.

The Process Integration Package processes the SalesOrderHistory file together with data already loaded into the ODS, and uses it to generate a file of demand history called DemHistory.dat.

6. Collecting sales history.

The PIP processes the DemHistory file and loads the data into Demantra Demand Management.

7. Exporting forecast publish process data is from Demantra Demand Management using the PIP.

8. Converting the forecast and reverse the customer code.

The PIP processes the exported forecast data to generate a file of forecast details called forecast.txt.

9. Uploading the forecast.

The forecast.txt file is imported into PeopleSoft and used to populate the publish tables that will be ready for use by PeopleSoft Supply Planning, Inventory Policy Planning and Inventory applications.

Common Elements Used in This Chapter

Item/Product Forecasts	Select a value that determines the nature of the forecast. If you select <i>Item</i> , the system sets the Item Code field to <i>INV_ITEM_ID</i> and the Organization field to <i>BUSINESS_UNIT_IN</i> . If you select <i>Product</i> the system sets the Item Code field to <i>PRODUCT_ID</i> and the Organization field to <i>BUSINESS_UNIT_OM</i> .
Publish Name	Enter or select a label that other applications use to identify the publish activity. The name is a logical name that you can use to publish a forecast again and again. When you import forecasts, you can select which name you want to use to populate publish forecast tables. The system uses this field, along with a forecast publish date, to create a unique publish instance that other applications use to retrieve the published data.
Map ID	Select or enter a map ID. You use map IDs to map data fields from PeopleSoft to Demantra Demand Management flat files. During the demand export and forecast import processes, the system uses the map ID to identify what data to export and to validate the data that is being imported.

Setting Up Calendar and Weight Profiles

This section provides an overview of calendars and discusses how to:

- Define calendar patterns.
- Create and maintain calendars.
- Define calendar periods.

Understanding Calendars

A calendar in PeopleSoft controls forecast and inventory policy parameters for each day of the year by using weights. The system stores weights for each day and distributes raw data into different period buckets based on the weights.

Note. Some calendar attributes are used by PeopleSoft Inventory Policy Planning and not in conjunction with Demantra Demand Management integration.

See *PeopleSoft Enterprise Inventory Policy Planning 9.1 PeopleBook*, "Setting Up PeopleSoft Inventory Policy Planning," Creating Calendars.

Here are some key factors for working with calendars:

- Establish an overall time frame that might extend over several years.

A calendar should start at a date that is equal to or prior to the earliest date of the demand history that you want the application to populate and recognize. The calendar should extend beyond the end of the forecast horizon.

Set up a standard calendar which includes the generally observed corporate holidays or vacations. You can then copy this calendar to other calendars as a starting point when setting up calendars to reflect local operating conditions.

- Define multiple calendars that cover the same date ranges.
- Change days within a specific calendar to contain various elements of data.

Calendar patterns are week-long templates that you use to maintain calendar weights for each day in a weight profile. The week is from Monday through Sunday. Use patterns to set up daily weights attributes quickly for calendar weight profiles and apply them to a range of dates within the weight profile.

Weight profiles are templates that you use to create and maintain daily weights. The default weight profile typically has a normal weight distribution across a given date range.

Here are some examples of weight profiles that can be set up for customer ordering patterns:

- Orders are placed on the 1st and the 15th of the month.
- Orders are placed toward the end of the month.
- Orders are placed toward the end of the quarter.

Periods define time buckets for a calendar. Each calendar period is numbered within a year, either based on a calendar or fiscal year, and has a start date and an end date.

The definitions also allow the system to associate fiscal years and periods with underlying calendars, based on calendar years. For example, suppose that an organization's fiscal year runs from July to June on a monthly basis and you associate month one with July. The calendar period definition runs from July 1 of the starting year to June 30 of the ending year. In turn, the definition associates period one in each fiscal year with the month of July.

You cannot overlap start and end dates within a single period definition. However, the same day can belong to a different period in another period definition. The period definitions are independent of the daily weight attributes and therefore, the same day within the same calendar has identical attributes even if it is contained in multiple period definitions.

Note. When deciding whether to base period definitions on calendar or fiscal years, consider which period that forecasters and collaborators consider as period one. When the forecast is published for use by PeopleSoft Inventory Policy Planning, Supply Planning or Inventory, the system uses dates to determine the period to which the forecast is assigned.

The system copies the data setup for a pattern code to the appropriate day in the weight profile. You can apply different pattern codes for different date ranges to change daily attributes or weightings for days that are in a selected date range. The pattern code is not stored in the weight profile; rather, the system copies attributes from the pattern code to each day in the weight profile. Therefore, you can reapply the pattern-code data to parts of the weight profile at any time.

You can also:

- Create new pattern codes and apply them to weight profiles that are already in use.
- Assign pattern codes to weight profiles by using the Weight Profiles page. To access the page, select Define Calendars, Weight Profiles.
- Change details for an existing pattern code at any time.

This does not change the details on a weight profile where the pattern code has been used. To change the weight profile details, you must maintain the individual weight profile by reapplying the new pattern code to it or by changing the weight details manually on the weight profile.

Pages Used to Set Up Calendar and Weight Profiles

<i>Page Name</i>	<i>Definition Name</i>	<i>Navigation</i>	<i>Usage</i>
Define Calendar Patterns	DP_CALENDARPATTERN	SCM Integrations, Advanced Planning, Demantra, Calendar Patterns	Define calendar patterns.
Define Calendar Structure	DP_CALENDARS	SCM Integrations, Advanced Planning, Demantra, Calendars	Create and maintain calendars.

<i>Page Name</i>	<i>Definition Name</i>	<i>Navigation</i>	<i>Usage</i>
Periods	DP_CALENDARS_2	SCM Integrations, Advanced Planning, Demantra, Calendars Select the Periods tab.	Define calendar periods.
Calendar Weight Profiles	DP_WEIGHTPROFILES	SCM Integrations, Advanced Planning, Demantra, Weight Profiles	Define calendar weight profiles that include assigning a pattern code and start and end dates to a calendar.
Change Calendar Weights	DP_CALENDARWGTS	SCM Integrations, Advanced Planning, Demantra, Change Calendar Weights	Change daily calendar weights for a specific calendar.
Copy Weight Profile	DP_COPYWTPROFILE	SCM Integrations, Advanced Planning, Demantra, Copy Weight Profiles	Create weight profiles for a new or existing calendar by using profiles from an existing calendar.

Defining Calendar Patterns

Access the Define Calendar Patterns page (SCM Integrations, Advanced Planning, Demantra, Calendar Patterns)

Pattern Code Enter a code for use when you apply the pattern to a period of data. You assign pattern codes to weight profiles by using the Weight Profiles page. You can add a new calendar pattern at any time, and you must define at least one calendar pattern before you add a new weight profile.

Demand Weight Enter the relative weight for each day. For Demantra integration, the demand weight is used to determine whether a day is a working or a nonworking day when the system creates the calendar flat file.

Creating and Maintaining Calendars

Access the Define Calendar Structure page (SCM Integrations, Advanced Planning, Demantra, Calendar Patterns).

Calendar ID Enter a code for identifying the calendar. This field is required.

Start Date Enter a date that is early enough to cover the entire period of historical data that you plan to use in the system. The date is required and cannot be changed after you save the calendar.

End Date Enter a date that is far enough in the future to cover all future planning periods. PeopleSoft recommends that you start and end the overall calendar on the first and last day of a year even if the organization's fiscal year is different. The system requires the date and can extend it during the life of the calendar.

Defining Calendar Periods

Access the Periods page (SCM Integrations, Advanced Planning, Demantra, Calendars and select the Periods tab).

You can define multiple period codes for a calendar along with varying date ranges that increase the flexibility of the calendar. To create calendar periods:

1. If you are creating additional periods, click the Add Row button.

If this is the first time that calendar periods are added for the calendar, you do not need to perform this step.

2. Enter the period code that you want to use for the calendar, and a description.
3. Select a period type that determines which periods per year the calendar uses.

The system inserts the default value for the selected period type in the Periods Per Year field. You can override that value; however, if you want to customize the periods per year, select the *Periodic* period type.

If you previously added a period code, the system enters default values in the Start Date, End Date, and Forecast Period/Year start and end fields. You can override these values as needed.

4. Enter a start date and end date to set up the date range for the period code.

The system provides a default start and end date from the calendar. Values are required for both fields.

5. Enter values in the Forecast Period/Year fields for the start and end date to define a starting period other than the system default.

Use this feature to distinguish between a yearly calendar and a fiscal calendar. Yearly calendars match the start date, but you offset the date by entering the period that matches the start of the fiscal year. Values are required for both fields. If you are setting up weekly periods codes, you must indicate what week is the first week of the year.

6. Click the Recreate button.

If this is the first time that periods are defined for the calendar, click the Create button.

The system populates the lower portion of the page with more detailed period information.

You can change the details for an existing period definition at any time; however, you cannot change all of the fields. To change the period type or the starting date or starting period year, you must delete the period definition and recreate it. You can change the end date, end period, and year, as well as any of the individual period start and end dates.

The system can re-create period date ranges automatically. This process deletes existing period data and creates new periods and ranges that are based on the date and period details that you provide. If you need to extend the period definition end date, select a new end date, period and year; then click the Extend button to create new periods at the end of the existing periods, extending the periods through to the new end date.

Period Code	Enter a unique code that the system uses to retrieve data that you define for this period definition. Periods cannot overlap or have gaps between them. Within a single definition, you must include each day in a period, and a day cannot belong to more than one period.
Period Type	Select a value that determines the type of periods that make up the calendar. The formats for all period types are recurring through the end date for the calendar. The field is required. Values include: • <i>4 WEEKLY</i>: Each period is made up of four weeks. Use this in situations when you want to use a 13-month calendar. • <i>445</i>: The first two periods are four weeks long and the third is five weeks long. • <i>454</i>: The first and last periods are four weeks and the second period is five weeks. • <i>544</i>: The first period is five weeks and last two are four weeks. Each of the 4-4-5 period types are the same. The only difference is to indicate which month begins the 4-4-5 cycle. • If the first month that you define in the calendar is the second month of the 4-4-5 cycle, select the 4-5-4 period type. If the first month that you defined in the calendar is the five-week month, select the 5-4-4 period type. • <i>MONTHLY</i>: Each period represents a calendar month. • <i>PERIODIC</i>: The number of periods in a year is the value that you enter in the Periods Per Year field. • <i>QUARTER</i>: Each period is three months long. • <i>WEEKLY</i>: Each period is seven days long.
Periods Per Year	Enter the number of periods that occur in one year for the period type that you selected. The system provides a default value that is based on the period type that you select.
Total Periods	Displays the total number of periods in the calendar horizon when periods are created.

Start Date and End Date Enter a start and end date to define a subset of periods within the calendar, or change the start date to match the period one start date. The start and end dates must be within or equal to the start and end dates that you define on the Calendars page.

Note. When adding weekly periods based on a calendar year, make sure that the start date is at the beginning of the week that you want to have as week one.

For example, suppose that the week runs from Sunday to Saturday and January 1 is a Friday. Set the start date to January 3 and include the prior two days in the last period of the previous year.

Refer to the ISO 8601 (International Standards Organization) standard for determining the first week of the year. Also, the ISO calendar standards indicate which years have 52 weeks (short ISO calendar year) and which years have 53 weeks (long ISO calendar years).

For example, 1998, 2004, and 2009 might be within the calendar horizon and if you are establishing weekly periods. Then you should refer to the ISO standard to determine the beginning dates for the weeks in those years.

This table lists actions if the monthly period type is based on a calendar year or a fiscal year:

<i>Calendar Type</i>	<i>Start Date</i>	<i>Period Action</i>	<i>Year Action</i>
Calendar Year	1/1/2003	The system uses the default value of 1 as the start period.	The system uses the default value of 2003 as the year.
Calendar Year	7/1/2003	The system uses the default value of 7 as the start period.	The system uses the default value of 2003 as the year.
Fiscal Year: July 1-June 30	1/1/2003	You must enter 7 (January) as the forecast period to show the middle of the fiscal year.	You must enter 2003 as the fiscal year for the forecast.
Fiscal Year: July 1-June 30	7/1/2003	You must enter 1 as the forecast period to show the start of the fiscal year.	You must enter 2004 as the fiscal year for the forecast.

After you enter data and re-create it, review the record of periods to enter any changes that you want to make to the start and end dates. If you change an end date, the system automatically updates the next start date. If you change a start date, the system automatically adjusts the previous end date. If there are insufficient days between the start and end date or too many days to split into periods, an error message appears.

Forecast Period/Year	The system populates these start and end values based on the information that you enter in the Start Date and End Date fields. Enter either a forecast period, a year, or both to create or maintain the start and end date of the calendar manually.
Recreate	Click to rebuild period definitions if you change the forecast date, period, or year.
Extend	Click if you want the system to calculate the start and end period dates automatically for the period of time that you add. This increases the time over which the period code is valid by extending the end date.
Note. If you click the Extend button, you must recalculate the trading days to populate the trading days value for those extended periods.	

Defining Calendar Weight Profiles

Access the Calendar Weight Profiles page (SCM Integrations, Advanced Planning, Demantra, Weight Profiles).

The Calendar ID and Year fields are display-only. You can change the month field and enter data in each of the daily boxes. You must create a weight profile for each calendar. The system requires that you have a weight profile for the calendar that is associated with a forecast that is designated as the default weight profile.

Calculate Trading Days Select this option to indicate that the system should use this weight profile to calculate trading days.

If you select to calculate trading days, then when you maintain calendar period information, you can also view the total number of trading days for each period. Use the Periods page to view the number of trading days.

Note. This feature is not used with the Demantra integration.

Pattern Code Select a pattern code. When you set up a new weight profile, you can add the daily weights automatically by using one or more pattern codes. This is the easiest way to create the basic daily data for the weight profile for the first time. After this, you can change some or all of the daily weights by using another pattern code or by changing the weights for a single day.

Note. It is not necessary to apply the pattern code to the entire weight profile before saving it. Provided the weight profile has a start and end date, you can save it without applying a pattern and then subsequently apply the pattern code for ranges of dates within the weight profile start and end dates as required.

Start Date Select a date from which you want to apply the pattern along with an end date. You can repeat this to apply different patterns to different date ranges within the calendar.

End Date Select a date on which you want to finish applying the pattern.

Changing Daily Calendar Weights

Access the Change Calendar Weights page (SCM Integrations, Advanced Planning, Demantra, Change Calendar Weights).

Change Calendar Weights

Calendar ID: DEFAULT Default Calendar

Weight Profile: TESTINGUNIT Testing Unit

*Month: 01 - January *Year: 2005

Daily Weights						
Monday	Tuesday	Wednesday	Thursday	Friday	Saturday	Sunday
					1	2
3	4	5	6	7	8	9
1	1	1	1	1		
10	11	12	13	14	15	16
1	1	1	1	1		
17	18	19	20	21	22	23
1	1	1	1	1		
24	25	26	27	28	29	30
1	1	1	1	1		
31						
1						

Save
 Return to Search
 Previous in List
 Next in List
 Notify

Change Calendar Weights page

A daily calendar displays each day along with any weights for the day. Use the calendar to adjust the daily weight attribute by entering the relative demand weight for the day.

See [Chapter 14, "Integrating with Oracle's Demantra Demand Management," Setting Up Calendar and Weight Profiles, page 267.](#)

Mapping PeopleSoft Fields To Demantra Fields

You can map PeopleSoft fields for use with Demantra Demand Management processing. The system provides a field where you can indicate whether the map is at the product or item level. This section discusses how to:

- Map base fields.
- Map customer fields.
- Map sales fields.

Pages Used to Map and Maintain Forecasting Fields

<i>Page Name</i>	<i>Definition Name</i>	<i>Navigation</i>	<i>Usage</i>
Define Field Mappings - Base	FINT_ITMFLDMAP	SCM Integrations, Advanced Planning, Demantra, Define Field Mappings	Define base field mappings.
Define Field Mapping - Customers	FINT_LOCFLDMAP	Click the Customers tab on the Define Field Mapping - Base page.	Define customer field mappings.
Define Field Mappings - Sales	FINT_SALEFLDMAP	Click the Sales tab on the Define Field Mappings - Base page.	Define sales field mappings.
Copy Field Mappings	FINT_COPY_FLD_MAP	SCM Integrations, Advanced Planning, Demantra, Copy Field Mappings	Copy a map ID to create a new map.
Delete Field Mappings	FINT_DEL_FIELDMAPS	SCM Integrations, Advanced Planning, Demantra, Delete Field Mappings	Delete a map ID.

Defining Base Field Maps

Access the Define Field Mappings - Base page (SCM Integrations, Advanced Planning, Demantra, Define Field Mappings).

BaseCustomerSales

Map ID: ITMMap Name: DEFAULT ITEM MAPPINGS

*Item/Product Forecasts: Item

Item Code: INV_ITEM_IDDM_ITEM_DESC: MITBL_DESCR

Organization: BUSINESS_UNIT_INDM_ORG_DESC: DESCR

*Master Branch: US010Product Family: INV_PROD_FAM_CD

Planning UOM: UNIT_MEASURE_STD

*Shipping UOM: UNIT_MEASURE_SHIPPrimary UOM:

Volume UOM: UNIT_MEASURE_VOLWeight UOM: UNIT_MEASURE_WT

Branch Category Parameters

Operating Unit: GL_BUS_UNITBusiness Group: GL_BUS_UNIT

Legal Entity: LEGAL_ENTITY

Item Default Category

*Category Name: CATEGORY*Planning Field: CATEGORY_ID

Item Group Mappings

CustomizeFindFirst1 of 1Last

*Group Name*Planning Field

+ -

SaveReturn to SearchNotifyPrevious tabNext tabRefreshAddUpdate/Display

Base | Customer | Sales

Define Field Mappings - Base page

Use this page to define which PeopleSoft fields are mapped to Demantra fields contained in the integration Base.xml file. You must select a value in the Item/Product Forecasts field. The page consists of a number of mapping fields along with a single Item Group Mappings grid used for mapping additional fields to Demantra using the Custom Hook functionality provided by the integration. For a new mapping, the system provides default values for field mappings.

Note. When you are using the Item Group Mappings grid, the group name that you enter cannot match the category name. Group names must be unique and cannot be duplicated, but you can map the same planning field mapped to more than one group.

- Map Name

Enter a name that you want to use to describe the map ID.
See [Chapter 14, "Integrating with Oracle's Demantra Demand Management," Common Elements Used in This Chapter, page 266.](#)
- Item Code

If the Item/Product Forecasts field value is *Item*, then the system sets the Item Code field to *INV_ITEM_ID*. The field cannot be changed. If the Item/Product Forecasts field value is *Product*, the Item Code field is set to *PRODUCT_ID* and cannot be changed.
You cannot leave the Item/Product Forecasts field blank.
- DM_ITEM_DESC

Displays a value based on the Item/Product Forecasts field setting. When the setting is *Item*, this field displays *MITBL_DESCR*.. When the setting is *Product*, this field displays *PRDITM_DESCR*.

Organization	The field is set to <i>BUSINESS_UNIT_IN</i> if the Item/Product Forecast field is set to <i>Item</i> . The Organization field is set to <i>BUSINESS_UNIT_IN</i> when the Item/Product Forecast field value is <i>Product</i> .
DM_ORG_DESC	Displays the description – <i>DESC</i> and is used to pass the description for the business unit to the integration.
Master Branch	Select a master branch. The master branch is required by the integration for validation purposes but the value is not used by Demantra. The master branch populates the base.xml file so that the branch will have an entry for each item or product, whether that branch and item combination exists in reality.
Product Family	Select a product family for the map ID. The system uses the data in this field to populate the product family in Demantra.
Planning UOM (planning unit of measure)	Displays the unit of measure to be mapped to the planning unit of measure in the integration. You cannot change the value.
Shipping UOM (shipping unit of measure)	Select the shipping unit of measure for this map ID. The shipping unit can be the shipping, standard, volume, or weight unit of measure.
Primary UOM (primary unit of measure)	Select a primary unit of measure to be used with this map ID. The primary unit can be the shipping, standard, volume, or weight unit of measure.
Volume UOM (volume unit of measure)	Displays a volume unit of measure to be used with this map ID. You cannot change the value.
Weight UOM (weight unit of measure)	Displays a weight unit of measure to be used with this map ID. You cannot change the value.

Branch Category Parameters

Branch categories are populated as default values and cannot be changed.

Operating Unit	Displays the PeopleSoft field used to populate the operating unit in Demantra. The <i>GL_BUS_UNIT</i> is obtained from the <i>BUS_UNIT_TBL_GL</i> table for the business unit that is being processed.
Business Group	Displays the PeopleSoft field – <i>GL_BUS_UNIT</i> – used to populate the business unit in Demantra.
Legal Entity	Displays the PeopleSoft field – <i>LEGAL_ENTITY</i> – that is used to populate the legal entity in Demantra.

Item Default Category

The item default category in Demantra is populated with the PeopleSoft field that you select in the Planning Field field.

- Category Name

Displays the item default category name.
- Planning Field

Select a planning field to be used to populate the item default category.

Item Group Mappings

The system uses item group mappings to populate additional fields in Demantra using the Customer Hooks functionality provided through the integration.

- Group Name

Enter a name for the item group mapping that you will create using this grid. The group name is required by the integration. The name cannot match the item default category name. The group name cannot be duplicated; however, you can duplicate the PeopleSoft planning field to which the name is mapped.
- Planning Field

Select a PeopleSoft planning field with which you want to populate the group name that you entered.

Defining Customer Field Maps

Access the Define Field Mappings - Customer page (click the Customers tab on the Define Field Mappings - Base page).

BaseCustomerSales

Map ID: ITM Map Name: DEFAULT ITEM MAPPINGS

*Item/Product Forecasts: Item

Site Code: SHIP_TO_CUST_ID

Customer Category Parameters

*Channel Name: CHANNEL

*Channel Planning Field: CUST_CHANNEL

*Demand Class Name: DEMAND_CLASS

*Class Planning Field: PM_REGION

Customer Group Mappings

CustomizeFind1 of 1Last

*Group Name

*Planning Field

+

-

SaveReturn to SearchNotifyPrevious tabNext tabRefreshAddUpdate/Display

BaseCustomerSales

Define Field Mappings - Customer page

Use this page to define which PeopleSoft fields are mapped to Demantra fields contained in the integration Customer.xml file. You must select a value in the Item/Product Forecasts field. The page consists of a number of mapping fields along with a single Customer Group Mappings grid used for mapping additional fields to Demantra using the Custom Hook functionality provided by the integration. For a new mapping, the system provides default values.

The Site Code field is set to the Ship to Cust ID and you cannot change the value.

Note. When you are using the Customer Group Mappings grid, the group name that you enter cannot match either the channel name or the demand class name. Group names must be unique and cannot be duplicated but you can map can use the same planning field mapped to more than one group.

The channel and demand class in Demantra are populated with the PeopleSoft values that you select for the Channel Planning Field and Class Planning Field fields.

The channel name and demand class name are required by the integration.

Customer Category Parameters

Channel Name	Enter a name for the channel. This is required by the integration.
Channel Planning Field	Select a planning field that you want to map to the Channel field in Demantra.
Demand Class Name	Enter a name for the demand class. This is required by the integration.
Class Planning Field	Select a planning field that you want to map to the Demand Class field in Demantra. See Chapter 14, "Integrating with Oracle's Demantra Demand Management," Defining Base Field Maps, page 275.

Customer Group Mappings

Use this grid to map a customer group name. The system uses customer group mappings to populate additional fields in Demantra using the Customer Hooks functionality provided through the integration.

Group Name	Enter a group name. The group name cannot match either the channel name or demand class name. The group name cannot be duplicated; however, you can duplicate the PeopleSoft planning field to which the name is mapped.
Planning Field	Select a PeopleSoft planning field to which you want to link the customer group mapping name that you entered.

See Also

[Chapter 14, "Integrating with Oracle's Demantra Demand Management," Defining Base Field Maps, page 275](#)

Defining Sales Field Maps

Access the Define Field Mappings - Sales page (click the Sales tab on the Define Field Mappings - Base page).

BaseCustomerSales

Map ID:ITMMap Name:DEFAULT ITEM MAPPINGS

*Item/Product Forecasts:Item

Interface Field	Planning Field
ACTUAL_QTY	DP_DEMANDQTY
DM_ITEM_CODE	INV_ITEM_ID
DM_ORG_CODE	BUSINESS_UNIT_IN
DM_SITE_CODE	SHIP_TO_CUST_ID
ITEM_PRICE	LIST_PRICE
SALES_DATE	DP_DEMANDDATE

SaveReturn to SearchNotifyPrevious tabNext tabRefreshAddUpdate/Display

Base | Customer | Sales

Define Field Mappings - Sales page

Use this page to view sales field mappings for the map ID. Field mappings on this page are display only and cannot be changed,

Item/Product Forecasts

Select whether you want to display values for either the item or product forecast. When you make a selection, the system updates values in the Field Mappings grid.

Interface Fieldand
Planning Field

Displays the fields that the system will use to populate the SalesOrderHistory.txt file that is passed to Demantra through the integration. The Planning Field is the PeopleSoft field that you use to populate the Interface Field.

Building and Reviewing Demand History

This section provides an overview of building demand history and discusses how to:

- Build demand history.
- Review demand data history.

Understanding How to Build Demand History

Demand history is extracted from transactions in PeopleSoft Order Management, Billing, and Inventory. Internal data is transactional data that consists of demand quantities, dates, costing information, and attributes that are related to the product, item or customer.

The internal builder process creates a staging record by pulling the demand data and all of its related attributes (item/product/customer), costs, prices, and secondary information into a single record for each transaction. This data is read directly from sales orders, shipments, transfers, and invoices based on user-specified criteria. Demand data includes new demand for a selected date range and adjustments to demand for past periods.

When the system builds internal demand, you cannot make changes to demand data that's extracted from the transaction system. If the data is not correct, you should go back to the transactional system and correct it there.

Pages Used to Build and Review Demand History

<i>Page Name</i>	<i>Definition Name</i>	<i>Navigation</i>	<i>Usage</i>
Build Demand History	FINT_DDH_XTRACT	SCM Integrations, Advanced Planning, Demantra, Build Demand History	Build demand history by defining a process run ID, extracting details, and reviewing extractions for the previous times that the process was run.
Review Demand History	FINT_DMDHIST_FILT	SCM Integrations, Advanced Planning, Demantra, Review Demand History	Define selection criteria for which to review demand data history.
Demand Data History Inquiry	FINT_DMDHIST_TBL	SCM Integrations, Advanced Planning, Demantra, Review Demand History	Review demand history built from PeopleSoft SCM data.

Building Demand History

Access the Build Demand History page (SCM Integrations, Advanced Planning, Demantra, Build Demand History).

Build Demand History

Run Control ID: MPReport ManagerProcess MonitorRun

Demand Source

☒ Billing

☒ Sales Orders

☒ Order Shipments

☒ Material Stock Requests

☒ Transfers

Extract Demand From:

01/01/2000

Extract Demand To:

08/16/2009

Extract Custom Fields From:

BU Items Inventory

Forecast Kit Option

Both

Number of processes (Parallel)

1

Extraction Log

CustomizeFindView All

First1 of 1Last

General

Demand Source

Status

User ID	Run Control ID	Run Date	From	To Date
VP1	MP			

Save

Return to Search

Notify

Add

Update/Display

Build Demand History page

Use this page to run the Build Demand History (FINT_DHBUILD) process.

Use the Demand Source group box to select which internal PeopleSoft transaction data that you want to extract from PeopleSoft SCM records, such as sales orders and transfers.

Extract Demand From

Enter a starting date from which the build process should pull data. The system extracts demand history from records only for the selected transactions from this period. The default value for this field is the latest extract demand to date for the previous extraction.

Extract Demand To

Enter an ending date from which the build process should pull data. The default value for the field is the current date.

Extract Custom Fields From

Select the record from which you want to extract custom fields. You can use custom fields from PeopleSoft Inventory to update specific user-defined fields. Using this field, you determine whether the system uses custom fields from the item level or from the item/business unit level.

Values include:

BU Items Inventory (business unit items inventory): These custom fields are related to the item ID specifically as it relates to a specific business unit.

Master Item Table: These custom fields are related to the item ID specifically across all business units.

Forecast Kit Option

Select whether you want to run the Demand Data History Builder process using product kits. A product kit consists of a fixed set of components that are forecasted as a unit.

Forecast kit options include:

Both: Select to include components and product kits in the build process. The process creates a demand record for each product kit and for each component in the product kit.

Components: Select to include only the components in the build process. The process creates a demand record for each component in the product kit.

Product Kits: Select to include only product kits in the build process. The process creates a demand record for each product kit.

During inventory policy generation, PeopleSoft Inventory Policy Planning can react to the kits and explode product kit items into its components. The Policy Generation (DP_CALCPOLCY) process matches inventory policy items and attributes for use in the PeopleSoft Inventory system.

See *PeopleSoft Enterprise Inventory 9.1 PeopleBook*, "Working With Product Kits in Order Fulfillment," Understanding Product Kits.

Demand Source Tab

Select the Demand Source tab.

Displays the PeopleSoft transaction data types that are selected for the run control ID that you choose on the General tab. The check boxes that you select indicate that the system will include data from that source when it runs the build process. Sources include:

Billing

Sales Orders

Order Shipments

Material Stock Requests

Transfers

Status Tab

Select the Status tab.

Status	Displays the state of the corresponding run control ID. Values include: <i>Processed</i>: Indicates that the process is complete and extracts the number of rows of data that are displayed in the corresponding column. <i>Not Processed</i>: Indicates that this extract run control has not been processed before. <i>Errored</i>: Indicates that this process was started but not complete because of an error. The system locks the build process for one of these reasons: • The load process was running. • The load process completed in error. • The build process was already running. • The build process completed with an error. • The forecast was locked for another process.
Rows Extracted	Displays the number of rows of data extracted from records when this process ran. The system writes this data to the DP_DMDHISTORY record.
Notes	Displays system-generated messages that indicate the number of rows that were updated from each demand source.

Reviewing Demand Data History

Access the Review Demand History page (SCM Integrations, Advanced Planning, Demantra, Review Demand History)

Demand Data History Inquiry										
Demand Data History										
Return to Filter Customize Find View All First 1-8 of 8										
Demand Source	Demand Date	Item ID	Inventory Unit	Product ID	Order Management Unit	Ship To Customer	Demand Quantity	Demand Value	Update Status	Error Comments
BI	08/11/2000	10004	US010	10004	US001	1001	20.0000	250.0000	0	
BI	08/16/2000	LT5010	US008	LT5010	US001	1001	2.0000	1584.0000	0	
BI	08/16/2000	LT5010	US008	LT5010	US001	1001	3.0000	2376.0000	0	
BI	07/06/2006	10002	US010	10002	US001	1001	200.0000	1050.0000	0	
BI	07/06/2006	10002	US010	10002	US001	1001	200.0000	2100.0000	0	
BI	07/06/2006	10002	US010	10002	US001	1001	200.0000	1050.0000	0	
BI	07/06/2006	10002	US010	10002	US001	1001	1.0000	0.0000	0	
BI	07/11/2006	10002	US010	10002	US001	1004	500.0000	11250.0000	0	

Demand Data History Inquiry page

Demand

Select the Demand tab to view information about the demand. As part of the information the page displays the source and date of the demand, the quantity and value of the demand, and any errors that occurred during the build for each row of data. The demand source is where the demand originated such as a billing or a customer.

Codes

Select the Codes tab to view information about any codes associated with the demand, for example, the UOM, source code, or forecaster code.

Currency

Select the Currency tab to view information about the currency, conversion rate, cost per unit and list price for the demand.

Orders

Select the Orders tab to view information about the orders associate with the demand. This information describes, for example, the Order Management business unit, salesperson, order line and schedule line number.

Shipments

Select the Shipments tab to view information about how the demand will be shipped. This includes the ship to customer and the item's shipping date.

Billing

Select the Billing tab to view billing information for the demand. Billing information includes the customer, invoice number and date, and the Billing business unit.

Items

Select the Items tab to view a variety of demand item information. Item information ranges from component, group, family and category information to attribute information such as item type and utilization group.

Products

Select the Products tab to view product demand information including the product ID, group, brand, category and product description.

Customers

Select the Customers tab to view customer demand information. Customer demand information includes the sold to customer and corporate customer and customer group and subgroup information.

Customer and Product Custom Items

Select any custom item tab for customers and product to view tailored demand information that has been defined by the organization.

Promotional Channel

Select the Promotional Channel tab to display PeopleSoft Order Management information that is related to events. Fields include Customer Channel, Classification, Division, Region, and Territory.

Exporting Data to Demantra

This section provides an overview of exporting data and discusses how to:

- Define export specifications.
- Maintain export controls.
- Export demand.

Understanding Data Export

Demand data is the actual sales requirement for a product, item, or component. When defining an import specification for demand data, select the data fields that you want the system to use for importing demand data. When you load records, the system processes demand data that matches the selection criteria that you define on this page. You can also define additional parameters or update these parameters when you run the import process.

When you use this specification to load data, the system processes items only in the forecast that you select.

Pages Used to Export Data to Demantra

<i>Page Name</i>	<i>Definition Name</i>	<i>Navigation</i>	<i>Usage</i>
Define Export Specifications	FINT_EXP_SPEC	SCM Integrations, Advanced Planning, Demantra, Define Export Specifications	Define export specifications by setting up parameters for extracting demand data into files for integration to Demantra Demand Management.
Maintain Export Controls	FINT_DDH_CONTROL	SCM Integrations, Advanced Planning, Demantra, Maintain Export Controls	Maintain export controls that define how the system should process demand data history.
Export Demand	FINT_EXPORTDMD	SCM Integrations, Advanced Planning, Demantra, Export Demand	Export demand to Demantra Demand Management.
Copy Export Specifications	DP_COPYDPINT_SPECS	SCM Integrations, Advanced Planning, Demantra, Copy Export Specifications	Create an export specification by copying the attributes of an existing specification. The system copies the specification parameters and the selection criteria from the specification.
Delete Export Specifications	DP_COPYDPINT_SPECS	SCM Integrations, Advanced Planning, Demantra, Copy Export Specifications	Delete export specifications.

Defining Export Specifications

Access the Define Export Specification page (SCM Integrations, Advanced Planning, Demantra, Define Export Specifications).

Define Export Specification				Date Updated:	10/06/2009 5:26AM
Specification ID:		Q4		Updated By:	VP1
Description: Fourth Quarter					
*Map ID:	ITM v	DEFAULT ITEM MAPPINGS	Posting UOM:	Standard Inventory UOM	
*Delimiter:	v		Forecast Kit Option:	Components v	
*Calendar ID:	DEFAULT v		*Weight Profile:	DEFAULT v	
Demand Source					
☒ Billing		☒ Sales Orders		☒ Order Shipments	
☒ Material Stock Requests		☒ Transfers			
Selection Criteria Customize Find View All v v First 1 of 1 Last					
Open (	Field Name	Operator	Criteria	Close)	Next
v	Item Type v	>= v	Generic Brand v	v	And v + -
Save		Return to Search		Notify	
				Add Update/Display	

Define Export Specification

Use this page to define basic information about an export specification, select demand sources, and define selection criteria. Export specifications enable you define a set of data that you can export for use with the Oracle Value Chain Planning Process Integration Package (PIP).

Date Updated	Displays the last date the export specification was updated.
Updated By	Displays who updated the export specification.
Posting UOM (posting unit of measure)	Displays <i>Standard Inventory UOM</i> which indicates that the system uses the unit of measure defined for the item at the business unit level.
Delimiter	Select the delimiter that the system uses during the integration Values include: • + (plus sign). • -(minus sign). • .(period). • / (forward slash). • \ (backward slash). • (slash).

Forecast Kit Option

Select whether you want to run the process using product kits. A product kit consists of a fixed set of components that are forecasted as a unit. The default value for the field is blank and will include components and product kits in the build process. The process creates a demand record for each product kit and for each component in the product kit.

Forecast kit options include:

Components: Select to include only the components in the build process. The process creates a demand record for each component in the product kit.

Product Kits: Select to include only product kits in the build process. The process creates a demand record for each product kit.

During inventory policy generation, PeopleSoft Inventory Policy Planning can react to the kits and explode product kit items into its components. The Policy Generation (DP_CALCPOLCY) process matches inventory policy items and attributes for use in the PeopleSoft Inventory system.

See *PeopleSoft Enterprise Inventory 9.1 PeopleBook*, "Working With Product Kits in Order Fulfillment," Understanding Product Kits.

Calendar ID

Select a calendar to be exported and used by the integration.

See Chapter 14, "Integrating with Oracle's Demantra Demand Management," Understanding Calendars, page 267.

Weight Profile

Select the weight profile that you want to use for the export. The profile determines which dates are working and nonworking days. The system also associates weight profiles with a calendar, so the values that are available for this field depend on the calendar ID that you selected.

Demand Source

The check boxes that you select indicate that the system will include data from that source when it runs the export process.

Selection Criteria

Use the grid to provide filter elements for the data subset. The feature makes it possible for you to control and filter ranges of data or types of data to be selected for export. You create the subset by establishing selection criteria for the field. For example, if you want to limit the number of items or only select data for a specific location, you can select a range of records to limit the Item Code or Location field.

Open ((open parenthesis) Select the open parenthesis character to signify the start of a group of criteria that you want to enclose. For example, if you have three criteria, you can create a selection criteria of (A or B) and C by placing an open parenthesis on the line for A.

Field Name

Select a field on which to filter. The system uses the field you define as the basis for further limiting data when you use the Criteria field. Fields that are available for selection are dependent on the function that you use.

Operator

Determines the action that the system applies to the criteria that you enter in the Criteria field. For example, suppose you want only item IDs that start with AA to be placed in the data file, use the = (like) operator. You should enter the correct form of the criteria to match the operation that you want the system to perform. Available operators depend on the page that you use.

Values include:

- <: Include values that are less than the value that you enter in the Criteria field.
- <>: Include values that are not equal to the value that you enter in the Criteria field.
- =: Include only values that are equal to the criteria.
- >=: Include values that are equal to or greater than the criteria.
- *BETWEEN*: Include only values between the two values that you enter as criteria. This operation requires a list with values that are appropriate to the fields that are selected for string values. For example, a string might be A, B, C, and D. You enter A and D to include B and C values only. Values can include numeric strings.
- *IN*: Include records that contain the criteria that you enter. This operation requires a list with values that are appropriate to the fields that are selected for string values. Values can include numeric strings.
- *LIKE*: Include only values that match the value that you enter. The criteria must include at least one wildcard character. For example, you could use Apple%. This would select values starting with Apple while %Ap% would select values containing Ap.
- *NLIK*: Include values that do not match this value. This option restricts values from the data subset. The value must include at least one wildcard character.
- *NOT BET*: Include values that are not between the two values that you enter in the Criteria field.
- *NOT IN*: Include values that are not in the range of values that you enter as selection criteria.

Criteria

Enter the value that you want the system to use when applying the operators. For example, if you select >= for an Item Code field and enter AA100 as the criteria, then the system includes only values that are equal to or greater than the criteria.


Close) (close parenthesis) Select the close parenthesis character to signify the end of a group of criteria that you want to enclose. For example, if you have three criteria, you can create a selection criteria of (A or B) and C by placing an close parenthesis on the line for B.

Next

Provides a means of creating And or Or statements for the operators and criteria that you enter. Use the *AND* option to create additional criteria for the field. Use the *OR* option to create contrasting criteria.

Maintaining Export Controls

Access the Maintain Export Controls page (SCM Integrations, Advanced Planning, Demantra, Maintain Export Controls).

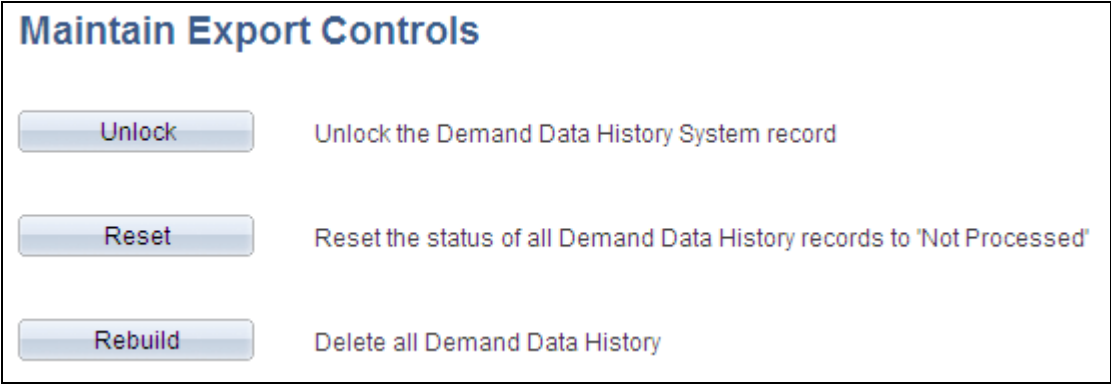

Maintain Export Controls page

Use this page to define how the system should process demand history data when exporting data to Demantra.

Unlock	Select to unlock the demand data history record in the event of a failure or other problem. Do not use this option when the build or load processes are running.
Reset	Select to reset the status of all demand data history records to the status of not processed. You normally only use this option during system start up. Warning! This resets the status of all demand data history records to <i>Not Processed</i>.
Rebuild	Select to delete all demand data history records. You normally only use this option during system start up. Warning! Selecting this option deletes all demand history.

Exporting Demand

Access the Export Demand page (SCM Integrations, Advanced Planning, Demantra, Export Demand).

Export Demand

Run Control ID: Costing

[Report Manager](#) [Process Monitor](#) [Run](#)

*Specification ID:

Q4

Description:

Process Run

[Edit Export Specification](#)

*From:

09/04/2009

*To Date:

10/05/2009

Range of Data

☒ Sales

☐ Base

☒ Customer

☐ Calendars

File Path:

[Save](#) [Return to Search](#) [Previous in List](#) [Next in List](#) [Notify](#) [Add](#) [Update/Display](#)

Export Demand page

Use this page to define run controls and initiate the Export Demand History (FINT_DMD_EXP) process.

- Specification ID

Select an export specification. An export specification defines the demand history data set that you want to export for use with the integration to Demantra Demand Management.
- Edit Export Specification

Click to access the export specification that you selected to use with this run control. Using the page, you can make updates to specifications to refine the demand history data to use with the export process.
- From andTo Date

Select the date range from which to include demand history data for this export process.
- Sales, Base, Customer, and Calendars

Select the date range from which to include demand history data for this export process.
- File Path

Enter the location where you want the export Integration files to be created.

Importing Data from Demantra

This section discusses how to:

- Define import specifications.
- Import forecasts.

Pages Used to Import Data From Demantra

<i>Page Name</i>	<i>Definition Name</i>	<i>Navigation</i>	<i>Usage</i>
Define Import Specifications	FINT_IMP_SPEC	SCM Integrations, Advanced Planning, Demantra, Define Import Specifications	Define import specifications by setting up parameters for loading forecast data sent from the Demantra Demand Management system into PeopleSoft publish tables.
Import Forecast	FINT_IMPORT_FCST	SCM Integrations, Advanced Planning, Demantra, Import Forecast	Import forecasts from Demantra Demand Management.
Copy Import Specifications	FINT_COPYIMP_SPEC	SCM Integrations, Advanced Planning, Demantra, Copy Import Specifications	Create an import specification by copying the attributes of an existing specification. The system copies the specification parameters and the selection criteria from the specification.
Delete Import Specifications	FINT_DEL_IMP_SPEC	SCM Integrations, Advanced Planning, Demantra, Delete Import Specifications	Delete import specifications.

Defining Import Specifications

Access the Define Import Specification page (SCM Integrations, Advanced Planning, Demantra, Define Import Specifications).

Define Import Specification

Import Specification: DASD

Description:

Quarterly Forecast

*Publish Name:

DASD 1

*Map ID:

ITM

*Calendar ID:

DEFAULT

*Time Period Code:

WEEK

*Weight Profile:

DEFAULT

Default

*File Path:

C:\Drivers\Misc\nc64k_hdd

Selection Criteria

Customize | Find | First 1 of 1 Last

Open (	Field Name	Operator	Criteria	Close)	Next		

Save

Return to Search

Previous in List

Next in List

Notify

Add

Update/Display

☒ Publish Daily Weights

Define Import Specification page

Importing data is the process of retrieving forecast information sent from Demantra Demand Management by the Process Integration Package and loading that into PeopleSoft publish tables. You use an import specification to define the forecast information that you want to include and where the forecast data file resides.

- Calendar ID

Select a calendar for use by the import specification. Calendars provide the time horizon over which the forecast operates.
- Time Period Code

Select a code for the selected calendar for the specification. A period definition is comprised of the number of periods per year and the total number of periods within the calendars date range. The period code defines the date range for each period and thus the size of the time buckets into which forecasts will be grouped.
- Weight Profile

Select the weight profile that you want to use for this import specification. The profile determines the weights that are associated with each time period and is used when the Publish Daily Weights check box is selected. The system associates weight profiles with a calendar.
- Publish Daily Weights

Select to have the system automatically publish the daily weights associated with the calendar for this import specification. Other applications use these weights to convert the published forecast into daily time periods for aggregation or reporting purposes. The default value is to include daily weights. You can publish daily weights regardless of what time period code you select for the specification.
- File Path

Enter the file name and path to the location of the external file that you want to import. The system imports the file only when you select to import the forecasts.

Selection Criteria

Use the grid to provide filter elements for the data subset. The feature makes it possible for you to control and filter ranges of data to be selected. You create the subset by establishing selection criteria for either items or locations.

See [Chapter 14, "Integrating with Oracle's Demantra Demand Management," Selection Criteria, page 289.](#)

Importing Forecasts

Access the Import Forecast page (SCM Integrations, Advanced Planning, Demantra, Import Forecast).

Import Forecast

Run Control ID: IMPQ1

[Report Manager](#) [Process Monitor](#) Run

User ID: VP1

*Import Specification:

DASD

Quarterly Forecast

[Edit Import Specification](#)

Publish Name:

DASD 1

Description:

Q1 Forecast

*Publish Date:

09/01/2009

31

Save

Notify

Add

Update/Display

Import Forecast page

Use this page to define run controls and initiate the Import External Forecast (FINT_FSTIMP) process.

Import Specification	Select an import specification. An import specification defines how data will be imported into the PeopleSoft publish tables from the file of forecasts supplied from Demantra Demand Management.
Edit Import Specification	Click to access the Define Import Specification page where you can make changes to an import specification before running the Import External Forecast process. Make sure that you save the data that you entered for this run control ID before editing the specification.
Note. This field is not available until you select an import specification.	
Publish Name	Enter the name used to identify the forecast data set. The name is a label that applications use to identify the publish activity. The name is a logical name that you can use to access and use the forecast data set again and again.

Description	Enter a description that to further describes the specification.
Publish Date	Select the date that you want to use as the publish date for this Import External Forecasts process run.

Reviewing and Updating Imported Forecasts

This section discusses how to:

- Review imported forecasts.
- Update forecasts.

Pages Used to Review and Update Imported Forecasts

<i>Page Name</i>	<i>Definition Name</i>	<i>Navigation</i>	<i>Usage</i>
Review Imported Forecasts	FINT_IMPORTFCSTINQ	SCM Integrations, Advanced Planning, Demantra, Review Imported Forecasts	Access imported forecast data using a forecast publish name or publish date.
Review Imported Forecasts (search criteria)	FINT_IMPFCST_FILT	Click the Search button on the Review Imported Forecasts page.	Define search criteria for reviewing forecasts.
Forecast Item Details	FINT_IMPFCST_TABLE	Click the Search button on the Review Imported Forecasts search criteria page.	Review imported forecast details.
Forecast Period Data	FINT_IMPFCST_DET	Click a Forecast Item link on the Forecast Item Details page.	Review forecast period data.
Forecast Update	FINT_RDOUPD_RUN	SCM Integrations, Advanced Planning, Demantra, Forecast Data Update	Update imported forecasts.

Defining Search Criteria for Reviewing Forecasts

Access the Review Imported Forecasts search page (click the Search button on the Review Imported Forecasts page after defining a publish name and date).

Review Imported Forecasts

Publish Name: ITMIMPSP

Publish Date: 01/01/2009

Map ID: ITM

Search

Clear Filter

Selection Criteria

Customize | Find | View All | First 1 of 1 Last

Open (	Field Name	*Operator	Criteria	Close)	Next		
v	INV_ITEM_ID v	>= v	10000 m	v	v	+	-

Review Imported Forecasts search page

Use this page to define the search criteria for the imported forecast information that you want to review. The page header information displays the publish name, date, and map ID that you selected. After defining selection criteria, click the Search button to retrieve the search results. Click the Clear Filter button to remove selection criteria entries.

Note. If you do not define search criteria, the system retrieves all the forecast details for the imported forecast.

See [Chapter 14, "Integrating with Oracle's Demantra Demand Management," Selection Criteria, page 289.](#)

Reviewing Forecast Item Details

Access the Forecast Item Details page (click the Search button on the Review Imported Forecasts page).

Forecast Item Details

Publish Name:ITMIMPSP

Publish Date:01/01/2009

[Return to Filter](#)

Item Details

Customize

Find

View All

First

1-15 of 88

Last

Forecast Item	Item Code	Location	Weight Profile	Base Unit	Publish Unit
10000:FRA05	10000	FRA05	EVENLOAD	EA	EA
10000:GBR02	10000	GBR02	EVENLOAD	EA	EA
10000:US010	10000	US010	EVENLOAD	EA	EA
10000:US011	10000	US011	EVENLOAD	EA	EA
10002:FRA05	10002	FRA05	EVENLOAD	EA	EA
10002:GBR02	10002	GBR02	EVENLOAD	EA	EA
10002:US010	10002	US010	EVENLOAD	EA	EA
10002:US011	10002	US011	EVENLOAD	EA	EA
10003:FRA05	10003	FRA05	EVENLOAD	EA	EA
10003:GBR02	10003	GBR02	EVENLOAD	EA	EA
10003:US010	10003	US010	EVENLOAD	EA	EA

Forecast Item Details page

Using the Forecast Item Details feature, you can review forecast item information and access forecast period data and weight profiles.

Forecast Item	Displays the logical item/location combination for the imported forecast data. Click the link to access the Forecast Period Data page where you can review additional forecast information.
Item Code	Displays the item code used to define an item across the organization.
Location	Displays the location or business unit for the forecast data.
Weight Profile	Displays the weight profiles defined for this imported forecast data set. Weight profiles are templates that you use to create and maintain daily weights for calendars. One weight profile must be defined on each imported forecast data set. <u>See Chapter 14, "Integrating with Oracle's Demantra Demand Management," Defining Calendar Weight Profiles, page 273.</u>
Base Unit	Displays the unit of measure (UOM) in which the system stores demand and forecast quantities for the selected forecast item. This is also the UOM that is associated with all standard prices and costs.
Publish Unit	Displays the unit of measure in which the forecast was published.

Reviewing Forecast Period Data

Access the Forecast Period Data page (click a Forecast Item link on the Forecast Item Details page).

Forecast Period Data

Publish Name:ITMIMPSP

Publish Date:01/01/2009

Forecast Item:10000:GBR02

[Return to Item Details](#)

Period Data

Customize | Find | View All | First 1-12 of 66 Last

Period	Year	Start Date	End Date	Forecast Value
3	2000	03/01/2000	03/31/2000	
4	2000	04/01/2000	04/30/2000	98.0000
5	2000	05/01/2000	05/31/2000	64.0000
6	2000	06/01/2000	06/30/2000	67.0000
7	2000	07/01/2000	07/31/2000	68.0000
8	2000	08/01/2000	08/31/2000	75.0000
9	2000	09/01/2000	09/30/2000	79.0000
10	2000	10/01/2000	10/31/2000	66.0000
11	2000	11/01/2000	11/30/2000	73.0000
12	2000	12/01/2000	12/31/2000	84.0000
1	2001	01/01/2001	01/31/2001	60.0000
2	2001	02/01/2001	02/28/2001	58.0000

[Return to Search](#)

[Previous in List](#)

[Next in List](#)

[Notify](#)

Forecast Period Data page

This page provides basic details about the imported or published forecast period data. The data includes period-by-period values for the imported (published) forecast. Select the Return to Item Details link to return to the Forecast Item Details page

Period	Displays the period to which this row of data pertains.
Year	Displays the year in which the period belongs.
Start Date and End Date	Displays the beginning and ending dates for the forecast period.
Forecast Value	Displays the total value of the forecast for the forecast period. The value appears in the published unit of measure.

Updating Imported Forecasts

Access the Forecast Update page (SCM Integrations, Advanced Planning, Demantra, Forecast Data Update).

Use this page to run the FINT_FSTUPD process to update the imported forecasts.

Publish Name	Select the name used to identify the imported forecast data. The name is a label that applications use to identify the publish activity. The name is a logical name that you can use to access and use the forecast data set again and again.
Forecast Set	Select the forecast set. The set contains the latest imported forecast set.
Item/Product Forecasts	Select whether to update the forecast based on the item forecast or the product forecast.
Forecast Update Method	Select the method that you want to use to update the forecast. Values include: <i>Complete:</i> Select to update the complete forecast set. <i>Replace:</i> Select to replace only those forecast items or products records that have been updated.

Part 8

Integrating with Sales and Use Tax Applications

Chapter 15

Calculating Sales and Use Tax in Supply Chain Management

Chapter 16

Integrating With Vertex O Series

Chapter 17

Integrating With Vertex Q Series

Chapter 18

Integrating With Taxware Enterprise

Chapter 19

Integrating with Taxware Sales and Use Tax

Chapter 15

Calculating Sales and Use Tax in Supply Chain Management

This chapter provides an overview of PeopleSoft tax solutions and discusses how to:

- Set up third-party tax vendors.
- Associate address information with geocodes.
- Interact with third-party tax vendors.
- View tax calculation errors in PeopleSoft Billing.
- Review third-party tax liability reporting.
- Compare U.S. and Canadian tax support.
- Review and modify tax jurisdiction level translation.

Understanding PeopleSoft Tax Solutions

This section discusses:

- Comparing PeopleSoft tax tables to third-party tax vendors.
- Understanding tax integration technologies.

PeopleSoft Billing supports the use of five sales and use tax solutions: PeopleSoft Tax Tables and two solutions each from the vendors Vertex and Taxware. PeopleSoft Tax Tables, included with PeopleSoft Billing, meets simple sales tax requirements but requires you to maintain tax rates. Provided interfaces enable PeopleSoft Billing to use two third-party tax vendors: Taxware and Vertex. These vendors provide solutions to the most complex sales tax requirements and maintain tax rates for you.

Note. If you use Taxware Sales and Use Tax, the Taxware STEP and Verazip modules are optional but recommended. Check with the tax vendors for the versions of their software that are available for the different releases of PeopleSoft.

Comparing PeopleSoft Tax Tables to Third-Party Tax Vendors

Third-party tax solutions provide a more complex set of features for sales and use tax calculations than PeopleSoft tax tables. The following table compares PeopleSoft tax tables with third-party solutions:

<i>PeopleSoft Tax Tables</i>	<i>Third-Party Solutions</i>
You must manually maintain tax rates.	The vendor provides monthly tax updates.
You must determine and manually check for exemptions. Exemption status is not determined at the time of calculation. If an order line, bill line, or purchase order line is not marked as tax-exempt, taxes are calculated.	The tax vendor system determines exemption status at the time of tax calculation. The tax vendor system maintains customer exemption certificates and product tax rules.
Tax rates come from the tax authorities of a tax code on the transaction. A tax code loosely represents a taxing jurisdiction. In PeopleSoft Billing, the tax code can be entered manually on a bill line, or it can be populated automatically from the ship to customer onto the bill during bill entry or through the bill interface. In PeopleSoft Order Management, the tax code can be entered manually, or it can be populated automatically from the ship to customer for the order line or schedule. In PeopleSoft Purchasing, the tax code can be entered manually on a purchase order, or it can be populated automatically from the ship to location to the purchase order schedule.	Tax rates and jurisdictions are determined from ship to, ship from, order origin, and order acceptance address information on the transaction.
Tax liability is maintained in separate accounts for each tax authority.	Tax liability is maintained in one account for the business unit.

Understanding Tax Integration Technologies

PeopleSoft supports integration with four sales and use tax solutions from two third-party vendors:

- Taxware Enterprise
- Vertex O Series
- Taxware Sales and Use Tax
- Vertex Q Series

Web Service Integrations


Taxware Enterprise and Vertex O Series are both implemented as web services. PeopleSoft applications communicate with these web services through the PeopleSoft Integration Broker. The Integration Broker uses the URL of the web service to conduct transactions with these tax solutions.

A streamlined connection method is available for Vertex O Series. The *Java Direct XML Post* method provides faster transaction speed; however, because this method bypasses the integration gateway, there is no transaction logging, which can be useful when troubleshooting problems. The connection method can be specified in PeopleSoft, on the Setup Financials/Supply Chain, Install, Tax Provider Installation page.

Business Interlink Integrations

PeopleSoft applications communicate with Taxware Sales and Use Tax and Vertex Q Series through Business Interlink objects and plug-ins. The Business Interlink object is part of the PeopleSoft system, but the Interlink plug-ins and associated integration software are provided by Taxware or Vertex. The plug-in and integration software must be installed on the PeopleSoft application and Process Scheduler servers. Initialization files, the Microsoft Windows Registry, or environment variables are used to store the information needed to connect to the main tax solution software and databases.

The following diagram shows how the PeopleSoft interlink object communicates with the interlink plug-in, which in turn communicates with the tax solution and database through the vendor shared libraries.

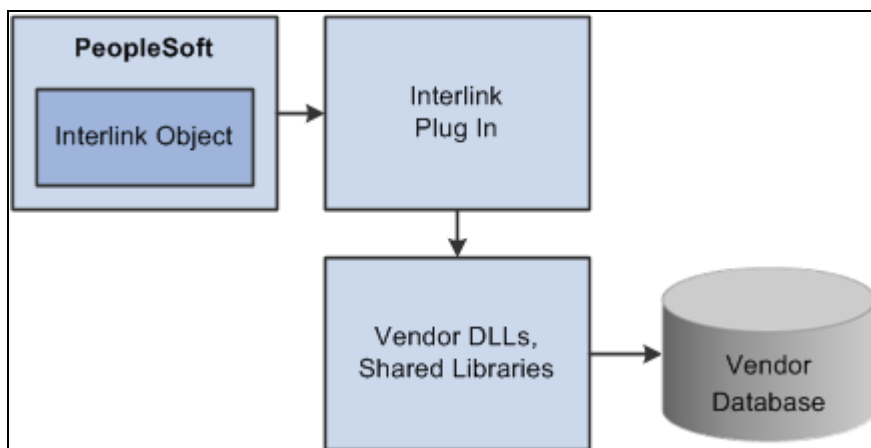

Third-party tax solution integration using Business Interlink objects and plug-ins

The generic tax vendor dynamic link libraries (DLLs), or shared libraries, are typically delivered by the tax vendors to all customers. Each vendor has a unique set of DLLs. The tax vendor database objects are the repositories for geocodes, tax rates, exception information, and transactions.

Note. An Interlink plug-in can also be installed on a Windows client running the PeopleSoft Application Designer to facilitate two-tier testing. Additional vendor-supplied software may be required, as typically only software for the target production operating system is provided.

For technical details about individual EIPs, use the Interactive Services Repository (ISR) in the My Oracle Support website located at <https://support.oracle.com/CSP/ui/flash.html>.

See Also

[Chapter 16, "Integrating With Vertex O Series," page 321](#)

[Chapter 17, "Integrating With Vertex Q Series," page 327](#)

[Chapter 18, "Integrating With Taxware Enterprise," page 335](#)

[Chapter 19, "Integrating with Taxware Sales and Use Tax," page 341](#)

Setting Up Third-Party Tax Solutions

You must perform the following steps to configure PeopleSoft applications to conduct transactions with a third-party tax solution. The third-party tax vendor software should be physically installed and running before carrying out these steps.

To set up PeopleSoft to use a third-party tax solution for tax calculations:

1. Select a tax vendor on the Installation Options - Overall page.

The selection in the Tax Vendor list box indicates which tax vendor's solution is installed for the PeopleSoft database. This tax vendor validates postal codes on customer address, vendor address, location address, and transaction address pages.

2. Define the tax solution installation options on the Tax Provider Installation page.
3. Select whether to use the tax vendor on the Billing Definition - Business Unit 2 page and the Taxes and Currency page of the PeopleSoft Order Management business unit definition.

Transactions in these business units have tax calculations performed by the installed tax vendor.

4. (Required for PeopleSoft Purchasing) Select whether to use the tax vendor on the Purchasing Definition - Business Unit Definition page.

Order to Cash-Specific Tax Vendor Setup

Complete these steps for PeopleSoft Billing and PeopleSoft Order Management:

1. Set up tax customer groups.

You can associate ship to customers with tax customer groups by selecting *Tax* as the group type. The system passes both the customer ID and tax customer group through the interface to the tax vendor to find exceptions in the tax vendor database based on customer or customer group.

2. Predefine exemption certificates for eligible customers on the General Information - Tax Exempt Certificate Info page, if customer exemption will be maintained in PeopleSoft instead of in the third-party tax vendor's database.

When you enter sales orders that are exempt from taxes, select the Tax Exempt check box on the Header Ship-To Defaults page, and select from the exemption certificates defined for the customer.

When entering bill lines that are exempt from taxes, select the Tax Exempt option on the Standard Billing - Line - Tax Info page, and select from the exemption certificates defined for the customer.

The Tax Exempt option on the sales order or bill line is the only way to override third-party tax vendor tax rules. The third-party tax vendor software logs the transaction as a user exception and does not tax the line.

The following steps are specific to PeopleSoft Order Management:

1. Define tax options for a product on the Product Definition - Options page.

Associate a tax product number defined on the third-party tax database with the product identifier. The system passes the tax product number to the third-party tax vendor system during tax calculation. You can define special rates or exceptions for the tax product number in the tax vendor system. The third-party tax vendor determines the correct tax rate for the product.

The transaction type and subtype that you enter are default values that the system passes to the third-party tax vendor system during tax calculation.

2. Associate the product with a tax product group on the Product Group page.

The system passes the tax product group to the third-party tax vendor system during tax calculation. You can define special rates or exceptions for the tax product group in the tax vendor system. The third-party tax vendor determines the correct tax rate for the product group.

The following step is specific to PeopleSoft Billing:

Define tax defaults for Billing charge codes on the Charge Code page.

Associate a charge code tax group with a Billing charge code. Also define a default transaction type and subtype to be passed to the third-party tax vendor system during tax calculation for a bill line for this charge code.

See Also

PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook, "Maintaining General Customer Information," Adding General Customer Information

PeopleSoft Enterprise Application Fundamentals 9.1 PeopleBook, "Setting Installation Options for PeopleSoft Applications," Setting Up Cross-Application Installation Options

PeopleSoft Enterprise Application Fundamentals 9.1 PeopleBook, "Setting Installation Options for PeopleSoft Applications," Defining Tax Provider Installation Options

PeopleSoft Enterprise Order Management 9.1 PeopleBook, "Maintaining Order Header and Line Information"

PeopleSoft Enterprise Billing 9.1 PeopleBook, "Establishing PeopleSoft Billing Business Units"

PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook, "Setting Up Products"

PeopleSoft Enterprise Purchasing 9.1 PeopleBook, "Defining PeopleSoft Purchasing Business Units and Processing Options," Understanding Business Units in PeopleSoft Purchasing

Using Tax Product Groups

Set up charge code and product tax groups to take advantage of exception processing in the third-party tax vendor system. These tax groups must be defined in the tax vendor system. You can create or update charge codes and products with the applicable tax groups. In PeopleSoft Billing, the system populates the default charge code tax group on a bill during bill entry, and the system passes that value to the tax vendor during tax calculation.

PeopleSoft correlates the tax group to a different entity in each of the supported tax solutions.

Tax Solution	Tax group equivalent
Vertex Q Series	Product Category
Vertex O Series	Product Class
Taxware Sales and Use Tax	Product Code
Taxware Enterprise	Not used. In Order Management, the product code corresponds to the Taxware Enterprise goods/services code. In Billing, the identifier corresponds to the Taxware Enterprise goods/services code.

If you use Taxware Sales and Use Tax system, you can

- Create tax groups equivalent to the product codes supplied by Taxware that apply to your business.
- Map the tax groups defined in PeopleSoft to Taxware product codes within Taxware.
- Use the Taxware STEP system to set up tax exceptions for tax groups defined in PeopleSoft that are not equivalent to Taxware product codes.

If you use Vertex, you can set up tax exceptions for product categories or classes and product IDs. The product categories or classes defined in Vertex should also be defined as tax groups in PeopleSoft. You may need to add the products defined in PeopleSoft as Vertex product IDs, if you define tax exceptions by product IDs. If necessary, map the product categories and product IDs defined in Vertex Q Series to product categories and subcategories defined in Vertex Q Series Taxability Mapping Tool (TMT).

Tax Product Groups in PeopleSoft Order Management

The sales order line and schedule designate a product ID. You can associate a tax product group with the product. PeopleSoft Order Management sends the product ID and the tax product group to the third-party tax vendor system, which determines what takes precedence when retrieving the appropriate tax rate used in tax calculation.

Tax Product Groups in PeopleSoft Billing

The bill line contains two product-related fields: the Identifier field and the Tax Group field. The system passes both fields to the third-party tax vendor system. When you enter a line during bill entry, the default tax group on the line appears from the tax group associated with the charge code used as the identifier.

See Also

PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook, "Setting Up Products"

Associating Address Information with Geocodes

A combination of addresses stored on a transaction enables the tax vendor system to determine which taxing jurisdictions and tax rates to use. Each address can be associated with a geocode provided by the tax vendor system.

This section provides an overview of geocodes and discusses how to associate customer and location addresses with geocodes.

Note. The term *Tax Area ID* is used in place of *Geocode* in Vertex O Series. *Geocode* is used within PeopleSoft applications for all third-party tax solutions.

Understanding Geocodes

Both Taxware and Vertex use geocodes, although each tax vendor system uses it differently. On any page where geocodes can be assigned, you can click the Geocode Lookup link to access the Tax Geocode Selection page. This link appears only if the installation options specify a tax vendor and the address country is U.S.A. or Canada.

During geocode lookup, the system passes address information such as address line 1, city, county, state, postal code, and country to the third-party tax vendor. The tax vendor software uses these address fields to determine a geocode.

Note. Address combinations must be valid in order to ensure that the third-party tax vendor software returns a valid geocode. For example, the city, state, and postal code combination must be valid.

Invalid addresses produce a jurisdiction determination error, which prevents the system from calculating taxes.

Note. During tax calculation, if address information is passed to Vertex without a geocode, Vertex assigns the geocode with the highest tax rate from the possible choices.

Refer to the third-party tax vendor documentation for more details on how your tax solution uses geocodes or tax area IDs.

Page Used to Associate Address Information with Geocodes

Page Name	Definition Name	Navigation	Usage
Tax Geocode Selection	TAX_GEOCODE_TMP	Click the Geocode Lookup link on an address page.	Select a geocode to associate with an address.

Associating Addresses with Geocodes

Access the Tax Geocode Selection page (Click the Geocode Lookup link on an address page).

Geocode	Select a single geocode to associate with an address.
Auto Fill Address	Select to have the system populate the address page with information from the selected geocode.
In City Limit	If populated, indicates that the address is within the city limit.

Warning! When you select a geocode, the city and state from the geocode page overrides the city and state on the original address page, if you also selected the Auto-Fill Address option. If you attempt to change the state or city after a geocode has been assigned, a warning message appears with the option to clear old geocodes, to prevent inconsistency between the assigned geocode and the rest of the address.

See Also

PeopleSoft Enterprise Purchasing 9.1 PeopleBook, "Creating Purchase Orders Online," Entering Purchase Order Schedule One-time Address Information

Interacting with Third-Party Tax Vendors

PeopleSoft Billing, PeopleSoft Order Management, and PeopleSoft Purchasing interact with third-party tax software for the following reasons:

- Geocode lookup.
- Online tax calculation in PeopleSoft Order Management, PeopleSoft Billing, and PeopleSoft Purchasing.
- Order completion processing (batch processing in PeopleSoft Order Management).
- Invoicing (batch processing in PeopleSoft Billing).
- Procurement card processing (batch processing in PeopleSoft Purchasing).

Note. The ship to customer ID and address number are required for all third-party tax processing in Order Management and Billing.

The system does not send the transaction to Vertex Q Series or Taxware Sales Tax for calculation if the ship to address is not a U.S. or Canadian address.

Maximum tax calculation is supported at the line level and the document level with release 8.9. Prior to release 8.9, maximum tax calculation is supported at the line level only.

Calculating Taxes in PeopleSoft Order Management

In PeopleSoft Order Management, the system calculates and saves taxes when you change the order and click the Calculate Price button. The Order Completion process calculates taxes for orders that are entered using electronic data interchange, returned material authorization replacement sales orders, and buying releases. The system uses this tax information when printing sales orders acknowledgments and quotations. You can also view the summarized tax amount on the Order Entry Form page.

The calculated tax amount is only an estimate of taxes for an order, and it is not posted to any tax registers. If you have PeopleSoft Billing installed, the system recalculates taxes even if they have been calculated previously in the order entry process online or by the Order Completion process.

Note. For typical sales orders where the payment is set to on account, PeopleSoft Order Management does not pass tax calculations to PeopleSoft Billing. However, in the counter sale environment, the tax calculations are passed to Billing. Taxes will not be recalculated in Billing when the transaction is fully paid up front and your installation is using the PeopleSoft tax solution as opposed to a third-party tax solution.

Calculating Taxes in PeopleSoft Billing

In PeopleSoft Billing, the system calculates taxes when you click the Calculate Taxes button on the Bill Summary page, and when you run the pro forma or finalization processes.

Note. The system does not calculate taxes or VAT for a bill line when the bill line's tax timing option (populated by PeopleSoft Contracts) is defined as S (taxes on services rendered).

Calculating Taxes in PeopleSoft Purchasing

In PeopleSoft Purchasing, the system calculates taxes when you:

- Click the Calculate button on the Maintain Purchase Order - Purchase Order page or the Express Purchase Order - Purchase Order page when entering a purchase order or a change order online.
- Click the Calculate SUT (calculate sales/use tax) button on the Maintain Purchase Order - Sales/Use Tax Information for Schedule page or Express Purchase Order - Sales/Use Tax Information for Schedule page when entering a purchase order or change order online.
- Perform the Purchase Order Calculations Application Engine process (PO_POCALC) that creates purchase orders.
- Perform the Change Purchase Order Application Engine process (PO_POCHNG) that creates change orders.

When you perform one of these actions, the system evokes the TaxCalc API process, which calculates your sales and use tax.

See Also

PeopleSoft Enterprise Order Management 9.1 PeopleBook, "Processing Sales Orders," Running Order Completion/Repricing

PeopleSoft Enterprise Purchasing 9.1 PeopleBook, "Creating Purchase Orders Online," Creating Purchase Order Headers

PeopleSoft Enterprise Purchasing 9.1 PeopleBook, "Creating Purchase Orders Online," Creating Purchase Order Schedules

Interacting with Third-Party Tax Solutions During Geocode Lookup

If you selected a third-party tax vendor on the Installation Options - Overall page, the system displays a geocode lookup link on the following pages:

- Location - Location Definition page.
- Customer address pages.
- Sold-to Address Override page.
- PeopleSoft Billing Ship-to Override page.
- PeopleSoft Purchasing Schedule One-Time Address page.

When you click the geocode lookup link, for a U.S. or Canadian address, PeopleSoft will request the geocode from the external tax system. The system displays geocode results from the tax vendor system on the Tax Geocode Selection page.

Note. Although selecting Taxware or Vertex as the tax vendor on the Installation Options - Overall page enables geocode lookups, business units must also be set up for tax calculations to be performed through a third-party tax solution.

For technical details about individual EIPs, use the Interactive Services Repository (ISR) in the My Oracle Support website located at <https://support.oracle.com/CSP/ui/flash.html>.

See Also

PeopleSoft Enterprise Order Management 9.1 PeopleBook, "Processing Sales Orders," Running Order Completion/Repricing

PeopleSoft Enterprise Application Fundamentals 9.1 PeopleBook, "Setting Installation Options for PeopleSoft Applications," Setting Up Cross-Application Installation Options

PeopleSoft Enterprise Application Fundamentals 9.1 PeopleBook, "Defining Financials and Supply Chain Management Common Definitions," Setting Up Locations

PeopleSoft Enterprise Billing 9.1 PeopleBook, "Entering Bills Online," Entering Bill Source Information

Enterprise PeopleTools 8.50 PeopleBook: PeopleCode API Reference

PeopleSoft Enterprise Purchasing 9.1 PeopleBook, "Creating Purchase Orders Online," Entering Purchase Order Schedule One-time Address Information

Interacting with Third-Party Tax Vendors During Online Tax Calculations

You can initiate online tax transactions in PeopleSoft Order Management, Billing, and Purchasing.

Online Tax Calculation in PeopleSoft Order Management

You trigger online tax calculations in PeopleSoft Order Management on the order line and order schedule pages by saving a valid order or clicking the Calculate Price button on the Order Entry Form or Shipment Schedules page.

PeopleSoft conducts a transaction with the external tax system, either through a web service or a business interlink. The data passed to the tax system in the transaction includes the tax company or organization, customer information including addresses, product information, and the line or schedule quantity, and the line or schedule amount. PeopleSoft Order Management tables are updated with tax information, including the tax amount and tax percentage.

Note. The taxes calculated in PeopleSoft Order Management are only temporary and are not logged by the tax vendor software. Actual taxes will be calculated when the invoice is finalized in Billing.

In the case of fully paid sales orders, the Billing Finalization process sends the invoice to the tax solution so that the amounts can be logged. Billing uses the original transaction date so that the taxes logged will match the taxes paid, in case the tax rules have changed since the sales order was taken.

Online Tax Calculation in PeopleSoft Billing

You trigger online tax calculations on the Bill Summary Info page when you click the Calculate Taxes button, if the current PeopleSoft Billing business unit is defined as using an installed third-party tax vendor. When you click Calculate Taxes, the following occurs:

1. PeopleSoft conducts a transaction with the external tax system, either through a web service or a business interlink.
2. The system displays the total tax amount on the Bill Summary Info page.
3. Click the Save button to update the PeopleSoft Billing tables.

You can view the detailed tax information on the Standard Billing - Line Tax page. The taxes calculated from the Bill Summary page are only temporary and are not logged by the vendor software.

Online Tax Calculations in PeopleSoft Purchasing

You trigger online tax calculations when you:

- Click the Calculate button on the Maintain Purchase Order - Purchase Order page or the Express Purchase Order - Purchase Order page when entering a purchase order or a change order online.
- Click the Calculate SUT button on the Maintain Purchase Order - Sales/Use Tax Information for Schedule page or Express Purchase Order - Sales/Use Tax Information for Schedule page when entering a purchase order or change order online.

See Also

PeopleSoft Enterprise Billing 9.1 PeopleBook, "Entering Bills Online," Reviewing Bill Summary Information

PeopleSoft Enterprise Purchasing 9.1 PeopleBook, "Creating Purchase Orders Online," Creating Purchase Order Headers

PeopleSoft Enterprise Purchasing 9.1 PeopleBook, "Creating Purchase Orders Online," Creating Purchase Order Schedules

Interacting with Third-Party Tax Vendors During Invoicing

PeopleSoft Billing interacts with third-party tax vendors during pro forma invoicing and invoice finalization. During pro forma invoicing, the system writes nothing to the tax vendor audit or registry files; in finalization, the system logs and reports all transactions.

The Pre-Process and Finalization process (BIIVC000) calls the Tax Interface process (BITAX000) when processing pro formas and invoices in business units defined as using a third-party tax vendor. The following occurs in the Tax Interface process:

1. PeopleSoft conducts transactions with the external tax system, either through a web service or a business interlink.
2. The tax amounts are saved on the PeopleSoft Billing tables.
3. If the third-party tax calculation detects errors, the third-party system returns error codes to PeopleSoft.

The system tags the bill and writes the error code to the specific line with the tax error.

In addition, the system enters a line in the message log for the erroneous line.

Note. You can run batch jobs that contain bills requiring both third-party vendor and PeopleSoft tax solution calculations; however, using more than one third-party tax solution is not supported. Only a single third-party vendor solution can be installed for a PeopleSoft database.

Interacting with Third-Party Tax Vendors During the Order Completion Process

The Order Completion process calls third-party tax vendors and provides the necessary information to calculate tax for the order. The values for the taxes are estimates and are stored on the order.

See Also

PeopleSoft Enterprise Order Management 9.1 PeopleBook, "Processing Sales Orders," Understanding Order Entry Required Processing

Viewing Tax Calculation Errors in PeopleSoft Billing

The method that you use to calculate taxes determines how you locate information in PeopleSoft Billing about resulting tax calculation errors.

This section discusses how to:

- View errors when calculating taxes online.
- View errors when calculating taxes through the invoicing process.

Viewing Errors When Calculating Taxes Online

If you calculate taxes online when you click the Calculate Taxes button on the Bill Summary Info page, and errors occur, the system displays a message containing the line with tax calculation errors and a vendor error code.

There are three levels of errors you might receive:

- Business interlink connectivity errors indicate missing DLLs or shared libraries, or permission errors.

An error message appears.

- Vendor database connectivity errors indicate trouble connecting to the vendor database.

An error message appears with a vendor return code.

- Tax calculation errors.

An error message appears with vendor return codes. The system writes the error message to the bill line tax record and displays the message on the Standard Billing - Line - Tax Info page.

See Also

PeopleSoft Enterprise Billing 9.1 PeopleBook, "Entering Bills Online," Reviewing Bill Summary Information

PeopleSoft Enterprise Billing 9.1 PeopleBook, "Entering Bills Online," Entering Tax Information

Viewing Errors When Calculating Taxes Through the Invoicing Process

If you calculate taxes from invoice pro forma or finalization, the message log reports how many bills that it finds with errors. On the Invoice and Line Errors page, you can view a list of bill lines and the error codes and descriptions associated with them.

Note. Refer to third-party documentation for a complete description of vendor-returned errors.

See Also

PeopleSoft Enterprise Billing 9.1 PeopleBook, "Generating Invoices," Inquiring About Individual Invoice Errors

Reviewing Third-Party Tax Liability Reporting

When using the PeopleSoft-delivered tax solution, you can set up different liability accounting information for each tax authority. When using Taxware or Vertex, however, each PeopleSoft Billing business unit can have only a single distribution code to use in recording general ledger information for taxes. Canadian tax support is the only exception to this rule.

Comparing U.S. and Canadian Tax Support

The following are some differences between the U.S. and Canadian third-party tax solutions support:

Note. Consult your vendor documentation for more information.

- The tax calculation routines calculate provincial sales tax (PST) and goods and services tax (GST) if given valid postal codes.
- For U.S. taxes, you can only use one sales and use tax liability account for each PeopleSoft Billing business unit in an integration with either Taxware and Vertex.

When you set up a Canadian PeopleSoft Billing business unit, a Billing business unit with a base currency of CAD, an additional distribution field appears that enables you to enter a separate tax liability distribution code for GST. This field appears only when you create a Billing business unit tied to a PeopleSoft General Ledger business unit that uses the Canadian dollar as its base currency.

See Also

Canadian Tax Processing section in the Taxware Technical Reference manual.

Reviewing and Modifying Tax Jurisdiction Level Translation

This section provides an overview of the translation of tax jurisdiction levels provided by third-party tax solutions to PeopleSoft tax authority codes and discusses how to modify the translation map used with Vertex O Series.

Understanding Tax Authority Code Translation

The PeopleSoft system translates the tax jurisdiction levels provided by Vertex Q and O Series, and Taxware Sales and Use Tax into a standard, PeopleSoft code. The PeopleSoft codes include:

- *ST*: State tax.
- *CTY*: City tax.
- *CNY*: County tax.
- *DST*: District tax.
- *SCN*: Secondary county tax.
- *SCI*: Secondary city tax.
- *SDI*: Secondary district tax.
- *GST*: Canadian goods and services tax.
- *PST*: Canadian provincial sales tax.
- *OTH*: Other.

Taxware Enterprise provides the PeopleSoft codes directly; no translation will take place. You can modify the mapping of Vertex O Series tax jurisdiction levels to tax authority codes using the XML Mapper component. You cannot modify the translation of authority codes used with Vertex Q Series or Taxware Sales and Use Tax.

Pages Used to Modify the Vertex O Series Tax Jurisdiction Translation Map

<i>Page Name</i>	<i>Definition Name</i>	<i>Navigation</i>	<i>Usage</i>
Define Maps	SAC_MAP_DEFN	SCM Integrations, XML Mapper, Define Maps	Identify the map ID, description, and map type for the translation of Vertex O Series tax jurisdiction levels to PeopleSoft tax authority codes.

Page Name	Definition Name	Navigation	Usage
Map Detail	SAC_MAP_DEFN_DTL	SCM Integrations, XML Mapper, Define Maps, Map Detail	Enter the mapping data needed for the translation of Vertex O Series tax jurisdiction levels to PeopleSoft tax authority codes. PeopleBooks talks about having this map id in your system through xml mapper but it doesn't point out how to setup the data we need if it is missing. It also doesn't include all the mappings necessary for the integration. I have included an attachment with the mappings and data that need to be included in a customers system for this integration.

Modifying the Vertex O Series Tax Jurisdiction Translation Map

Access the Define Maps page (SCM Integrations, XML Mapper, Define Maps).

1. With the search page, select the map with the Map ID, *VERTEXO_JURISDICTION*.
2. Select the Map Detail tab to access the Map Detail page.
3. Modify the entries in the Static Transformation grid.

Note. The * character in the External Value column represents unmapped codes coming from Vertex.

4. Click Save.

The following mappings are necessary for the integration:

- Map ID VERTEXO_JURISDICTION with map type VALUES ONLY.
- Map ID VERTEXO_TAX_RESULT with map type VALUES ONLY.
- Map ID VERTEXO_TAX_TYPE with map type VALUES ONLY.

The VERTEXO_JURISDICTION map ID should include the following data in the Static Transformation group box of the Map Detail page:

Internal Value	External Value
OTH	*
CTY	CITY
GST	COUNTRY

<i>Internal Value</i>	<i>External Value</i>
CNY	COUNTY
DST	DISTRICT
PST	PROVINCE
ST	STATE

The VERTEXO_TAX_RESULT map ID should include the following data in the Static Transformation group box of the Map Detail page:

<i>Internal Value</i>	<i>External Value</i>
E	EXEMPT
N	NON-TAXABLE
T	TAXABLE

The VERTEXO_TAX_TYPE map ID should include the following data in the Static Transformation group box of the Map Detail page:

<i>Internal Value</i>	<i>External Value</i>
C	CONSUMERS_USE
S	SALES
U	SELLER_USE

Chapter 16

Integrating With Vertex O Series

This chapter provides an overview of configuration tasks required to integrate PeopleSoft with the Vertex O Series tax solution and discusses how to:

- Configure Vertex O Series integration.
- Set Up PeopleSoft Installation Options for Vertex O Series.
- Test the Vertex integration.

Understanding PeopleSoft Integration With Vertex O Series

PeopleSoft communicates with the Vertex O Series web service through the PeopleSoft Integration Broker and the Vertex PGC (PeopleSoft Generic Connector). To integrate with the Vertex O Series tax solution, you must perform the following configuration steps:

1. Set up your local integration gateway and load the gateway connectors.

The Integration Broker uses the HTTPTARGET connector to communicate with the Vertex web service.

See *Enterprise PeopleTools 8.50 PeopleBook: Integration Broker, "Managing Integration Gateways"*

2. Activate the TAX_INTEGRATION service operation queue.
3. Activate the service operations and routings.

- DO_TAXCALC_REQ
- GET_GEOCODES_REQ

See Managing Service Operations, *Enterprise PeopleTools 8.50 PeopleBook: Integration Broker*

See Managing Routing Definitions, *Enterprise PeopleTools 8.50 PeopleBook: Integration Broker*

4. Activate the PSFT_TAX node.

5. Set Vertex as the Tax Vendor on the PeopleSoft Financials/Supply Chain Installation Options page and set the appropriate Vertex options on the Tax Provider Installation page.

See [Chapter 16, "Integrating With Vertex O Series," Setting Up PeopleSoft Installation Options for Vertex O Series, page 324.](#)

Note. When you switch from one Tax Vendor Application to another, such as switching from Vertex Q Series to O Series, any geocodes associated with address records in the PeopleSoft database must be upgraded before tax calculations can be sent to the tax vendor software. The Tax Provider Installation page will display the geocode upgrade process status. You should run the process, allow it to complete successfully, or fix any errors that occur, before proceeding.

6. Configure Billing, Order Management, and Purchasing business units to calculate sales and use taxes through the installed tax vendor and set business-unit level tax vendor options.

See [Chapter 15, "Calculating Sales and Use Tax in Supply Chain Management," Setting Up Third-Party Tax Solutions, page 306.](#)

See Also

PeopleSoft Enterprise Application Fundamentals 9.1 PeopleBook, "Defining Financials and Supply Chain Management Common Definitions," Updating Geo Codes for Locations and Addresses

Configuring Vertex O Series Integration

This section discusses how to:

- Activate the TAX_INTEGRATION service operation queue.
- Activate the service operations.
- Activate the routings.
- Activate the PSFT_TAX node.

Pages Used to Configure Vertex O Series Integration

Page Name	Definition Name	Navigation	Usage
Queue Definitions	IB_QUEUEDEFN	PeopleTools, Integration Broker, Integration Setup, Queues	Activate the TAX_INTEGRATION service operation queue.
Service Operation - General	IB_SERVICE	PeopleTools, Integration Broker, Integration Setup, Service Operations	Activate the service operations.

Page Name	Definition Name	Navigation	Usage
Service Operations - Routings	IB_SERVICETRNGS	PeopleTools, Integration Broker, Integration Setup, Service Operations Click the Routings tab.	Activate the routings.
Node Definitions	IB_NODE	PeopleTools, Integration Broker, Integration Setup, Nodes	Activate tax node.

Activating the TAX_INTEGRATION Service Operation Queue

Access the Queue Definitions page (PeopleTools, Integration Broker, Integration Setup, Queues).

For the TAX_INTEGRATION queue, verify that the Queue Status is *Run*.

Activating the Service Operations

Access the Service Operations - General page (PeopleTools, Integration Broker, Integration Setup, Service Operations, General).

PeopleSoft delivers service operations in PeopleSoft Integration Broker with a default status of *Inactive*. You must activate each service operation before attempting to send or receive data from a third-party source, such as Vertex. To setup a service operation use the information in the table below and refer to the setup instruction in the PeopleSoft Supply Chain Management Integrations 9.1 PeopleBook, "Implementing Integrations" chapter, Setting Up Service Operations section.

Service Operation	Direction and Type	Handlers	Chunking Available ?	Integrates With
DO_TAXCALC_REQ	Outbound Synchronous	not applicable	No	Vertex O Series or another third-party tax vendor
GET_GEOCODES_REQ	Outbound Synchronous	not applicable	No	Vertex O Series

See [Chapter 3, "Implementing Integrations," Setting Up Service Operations, page 69](#).

See *Enterprise PeopleTools 8.50 PeopleBook: Integration Broker*

Activating the Routings

Access the Service Operations - Routings page (PeopleTools, Integration Broker, Integration Setup, Service Operations, Routings).

Activate the *DO_TAXCALC_REQ_V2* and the *GET_GEOCODE_REQ_TAX* routings for the *PSFT_TAX* node.

- For the *DO_TAXCALC_REQ_V2* routing, set the PrimaryURL property to the endpoint of the Vertex tax calculation request function.

Typically this will be: `http://<host:port>/pgc/servlet/taxcalc`. Replace `<HOST:PORT>` with the address of the Vertex PeopleSoft generic connector.

- For the *GET_GEOCODE_REQ_TAX* routing, set the PrimaryURL property to the endpoint of the Vertex tax area request function.

Typically this will be: `http://<host:port>/pgc/servlet/taxarealookup`. Replace `<HOST:PORT>` with the address of the Vertex PeopleSoft generic connector.

See Manage Routing Definitions, *Enterprise PeopleTools 8.50 PeopleBook: Integration Broker*

Activating the PSFT_TAX Node

Access the Node Definitions page (PeopleTools, Integration Broker, Integration Setup, Nodes, Node Definitions).

Verify that the *PSFT_TAX* node is active.

See Adding and Configuring Nodes, *Enterprise PeopleTools 8.50 PeopleBook: Integration Broker*

Setting Up PeopleSoft Installation Options for Vertex O Series

The Set Up Financials/Supply Chain, Install, Tax Provider Installation page provides the following options for Vertex O Series:

Note. To display options for Vertex O Series, *Vertex* must be chosen as the Tax Vendor on the Overall Installation Options page and *Vertex O Series* as the Vertex Tax Application on the Tax Provider Installation page.

Tax Vendor Call Options

Determines whether tax calculation transactions are sent to Vertex line by line or as an entire document. The options are:

- *Doc Level*: an entire invoice or document is sent to Vertex for tax calculation.
- *Line Level*: tax calculation transactions are sent to Vertex line by line.

The *Doc Level* option allows you to take advantage of invoice and multiline maximum tax rules in some jurisdictions, but when you choose the *Doc Level* option, returns and credits must be carried out by issuing a full credit and rebill. Choosing the document level option will also provide faster tax transaction processing in most situations since fewer messages are exchanged with the Vertex tax software.

The *Line Level* option allows more flexibility when issuing credits and returns, but prevents you from taking advantage of maximum tax rules at the invoice or multiline level. This option should be chosen when it is not an acceptable practice to issue a full invoice credit and rebill when an individual line must be credited.

Tax Vendor Call – Payables

Select how tax calculation transactions from the Accounts Payable application are sent to Vertex. Transactions from Purchasing are always sent line by line, regardless of the value in this field.

Tax Vendor Call – Sales

Select how tax calculation transactions from the Billing application are sent to Vertex. Transactions from Order Management that are fully paid at sales order entry time also use this value; otherwise, they will always be sent line by line.

Tax Vendor Upgrade Status

Displays the status of the process run when the tax vendor application is changed. The process updates the geocodes associated with addresses in PeopleSoft.

Message Node Name

Set to the node setup for the exchange of messages between the PeopleSoft Integration Broker and the Vertex O Series web service. By default, the node to use is *PSFT_TAX*.

Tax Exemption Override Allowed

Select to allow tax exempt transactions to be sent from PeopleSoft to Vertex. If tax exemption overrides are not allowed, exemptions must be maintained within the Vertex application.

Testing the Vertex O Series Integration

To test the Vertex O Series integration, click the Test Tax Install button on the Tax Provider Installation page. The system will send a test transaction to Vertex and should report a Geocode and nonzero tax amount. If an error message appears or the tax amount is zero, then there is a problem with the tax installation that must be corrected.

Chapter 17

Integrating With Vertex Q Series

This chapter provides an overview of the PeopleSoft Business Interlinks used to integrate with the Vertex Q Series application and discusses how to:

- Identify Vertex plug-in locations.
- Identify Vertex dll and shared library locations.
- Set up variables for the Vertex database location.
- Set up PeopleSoft installation options for Vertex Q Series.
- Test the Vertex installation.
- Troubleshoot installation errors.

See Also

Integrating with Sales and Use Tax Applications

Vertex SoftLink Supplement to the C Programmer's Guide for use with PeopleSoft

Understanding PeopleSoft Business Interlinks to Vertex Q Series

PeopleSoft delivers two business interlink objects to interact with Vertex for both online and batch transactions: VERTEX_CALCTAX and VERTEX_GEOCODES. The business interlink objects communicate with Vertex Q Series through an interlink plug-in provided by Vertex. The interlink plug-in file name is `psbivrtx.dll` and it must be installed in the interface drivers directory.

UNIX Environments

In UNIX environments, the business interlink algorithmically converts the file name format from that of a Windows DLL to that of a UNIX shared library or shared object. The business interlink adds the prefix *lib* to the name, and replaces the extension, *DLL*, with the appropriate extension for the current UNIX platform.

For example, the business interlink changes the file name `psbivrtx.dll` to `libpsbivrtx.sl` before each call to the interlink plug-in.

See Also

<https://support.oracle.com/CSP/ui/flash.html>

Enterprise PeopleTools 8.50 PeopleBook: PeopleCode API Reference

Identifying Vertex Q Series Plug-in Locations

By default, the PeopleSoft system searches for the interlink plug-in in the interface drivers directory, as described in the following table:

<i>Location</i>	<i>Mode</i>
<PS_HOME>\bin\client\winx86\interface drivers	For two-tier testing on Windows.
<PS_HOME>\bin\server\winx86\interface drivers	For Windows application server and PeopleSoft Process Scheduler server.
<PS_HOME>/bin/interfacedrivers	For UNIX application server and PeopleSoft Process Scheduler server.

These directories also contain the XML script files that describe the interlink plug-in structure which were used to create the delivered business interlink objects in the PeopleSoft system. The XML script files have the same name as the Windows DLL plug-in, except that the .XML extension is used instead of the .DLL extension.

When you purchase the Vertex software, Vertex provides an interlink plug-in that you must place in these directories. The copy under the Windows directory
 <PS_HOME>\bin\client\winx86\InterfaceDrivers is not used in production. The PeopleSoft Process Scheduler server and the application server use the plug-in copy in
 <PS_HOME>\bin\server\winx86\InterfaceDrivers on Windows, or
 <PS_HOME>/bin/interfacedrivers on UNIX.

Application Server Configurations

The application server configuration file has the following entry, which you can use to change the plug-in default location:

```
[PSTOOLS]
=====
; General settings for PSTOOLS
=====
;Uncomment this to specify an alternate directory to search for Interface Drivers.
;Business Interlink Driver Directory=
```

Process Scheduler Configurations

The PeopleSoft Process Scheduler configuration file contains the following entry, which you can use to change the plug-in default location:

```
-----
;Uncomment to specify an alternate directory to search for Interface Drivers.
;Business Interlink Driver Directory=
```

Identifying Vertex Q Series DLLs and Shared Library Locations

Vertex-supplied DLLs or shared libraries can be placed in the following locations:

Note. Refer to the Vertex documentation for more information.

Windows NT

Typically, the Vertex DLLs should be placed in the same directory as the PeopleSoft main executable file:

<i>Location</i>	<i>Mode</i>
<PS_HOME>\bin\client\winx86	For two-tier testing on Windows.
<PS_HOME>\bin\server\winx86	For Windows application server and PeopleSoft Process Scheduler server.

UNIX

Typically, the Vertex shared libraries should be placed in the same directory with the other PeopleSoft libraries. This directory is <PS_HOME>/bin. It is usually one of the directories pointed to by the LIBPATH environment variable set up in the psconfig.sh UNIX shell script.

If the system cannot find either the plug-in DLL/shared library or Vertex DLLs/shared libraries, an interlink connectivity error appears.

Setting Up Variables for the Vertex Database Location

This section discusses how to:

- Set up Vertex on a Microsoft Windows NT or Windows 2000 platform.
- Set up Vertex on a UNIX platform.

Setting Up Vertex on a Microsoft Windows NT or Windows 2000 Platform

Vertex provides a registry file to populate entries in the Microsoft Windows NT or Windows 2000 registry. A typical file contains the following entries:

ab] (Default)	REG_SZ	(value not set)
ab] DebugLog	REG_SZ	c:\vertex30\debug
ab] DebugOn	REG_SZ	FALSE
ab] GeoDBDataSrc	REG_SZ	c:\vertex30\geocodes
ab] GeoDBPassword	REG_SZ	
ab] GeoDBServer	REG_SZ	
ab] GeoDBUser	REG_SZ	
ab] JurisNames	REG_SZ	
ab] RateDBDataSrc	REG_SZ	c:\vertex30\rates
ab] RateDBPassword	REG_SZ	
ab] RateDBServer	REG_SZ	
ab] RateDBUser	REG_SZ	
ab] RegDBDataSrc	REG_SZ	c:\vertex30\register
ab] RegDBPassword	REG_SZ	
ab] RegDBServer	REG_SZ	
ab] RegDBUser	REG_SZ	
ab] StatsOn	REG_SZ	FALSE
ab] TDMCacheAgeLimit	REG_SZ	3600
ab] TDMCacheSize	REG_SZ	16
ab] TDMCaseSense	REG_SZ	FALSE
ab] TDMDBDataSrc	REG_SZ	c:\vertex30\tdm
ab] TDMDBPassword	REG_SZ	
ab] TDMDBServer	REG_SZ	
ab] TDMDBUser	REG_SZ	
ab] UseTDM	REG_SZ	Y
ab] VVersion	REG_SZ	

Vertex registry file

For a Vertex ISAM database, provide values for xxxDBDataSrc. The value would be the directory containing the Vertex database. For relational database connection, the typical setup is to provide values for xxxDBServer, xxxDBPassword, and xxxDBUser, as follows:

```

RateDBDataSrc=
RateDBServer=qsu
RateDBPassword=solaris25
RateDBUser=solaris25
GeoDBDataSrc=
GeoDBServer=qsu
GeoDBUser=solaris25
GeoDBPassword=solaris25
RegDBDataSrc=
RegDBServer=qsu
RegDBUser=solaris25
RegDBPassword=solaris25
TDMDataSrc=
TDMDBServer=qsu
TDMDBUser=solaris25
TDMDBPassword=solaris25

```

There should be no blanks between the equal sign and the parameter entered.

See the Vertex Softlink documentation for additional information.

Setting Up Vertex on a UNIX Platform

Vertex provides a configuration file called PSVTXCFG that contains similar entries to the ones in a Microsoft Windows registry. This file must be accessible to the Vertex-supplied shared libraries. Define an environment variable called PSVTXCFG in `psconfig.sh`, and assign it the location of the configuration file. Define the variable for both the application server and PeopleSoft Process Scheduler so that the variable can be used by the Vertex software.

Setting Up PeopleSoft Installation Options for Vertex Q Series

The Set Up Financials/Supply Chain, Install, Tax Provider Installation page provides one option for Vertex Q Series: Using TDM. Although PeopleSoft applications as delivered do not currently support this option, it is included in case you want to configure it to work with your business processes. Set up the Using TDM (using Tax Decision Maker) option in your Vertex environment settings. Use of TDM is set up in the Vertex registry on a Windows NT platform and in PSVTXCFG.SH on a UNIX platform.

Note. To display options for Vertex Q Series, *Vertex* must be chosen as the Tax Vendor on the Overall Installation Options page and *Vertex Q Series* as the Vertex Tax Application on the Tax Provider Installation page.

Testing the Vertex Q Series Installation


To test the Vertex Q Series installation, click the Test Tax Install button on the Tax Provider Installation page. The system will send a test transaction to Vertex and should report a Geocode and nonzero tax amount. If an error message appears or the tax amount is zero, then there is a problem with the tax installation that must be corrected.

Troubleshooting Installation Errors

The sections discuss error messages that you may receive and suggestions for resolving the errors. For batch processing, similar error messages are placed in the message log of each failed process.

Two-Tier Testing, Interlink Tester With Plug-in or Vertex DLLs Not Accessible

This message appears:



Cannot load plug-in error message

Check the client directories to ensure the plug-in and the Vertex DLLs are in the correct directories. Check the Vertex documentation for a complete list of required DLLs. This error may also be related to changes that you make to the Configuration Manager to change the location of the default interlink directory.

Three-Tier Geocode Look-Up With the Interlink Plug-in Not Accessible

Check the directories on the computer running the application server and ensure that the plug-in and the Vertex DLLs are in the correct directories. Check the Vertex documentation for a complete list of required DLLs. This error may also be related to changes that you make to the Configuration Manager to change the location of the default interlink directory. Also check permissions of the plug-in and Vertex shared libraries.

Three-Tier Where the Vertex Open Fails on Geocode Look-Up

This error message appears when the Vertex software detects invalid Vertex database pointers, permissions issues or other open failures:



Vertex error message

Check the Microsoft Windows registry or Vertex UNIX configuration file PSVTXCFG to ensure entries are pointing to the correct locations. For a UNIX installation, ensure that the variable PSVTXCFG is defined in psconfig.sh, pointing to the directory that contains the PSVTXCFG file. Additionally, check for permissions problems.

Chapter 18

Integrating With Taxware Enterprise

This chapter provides an overview of configuration tasks required to integrate PeopleSoft with the Taxware Enterprise tax solution and discusses how to:

- Configure Taxware Enterprise integration.
- Set Up PeopleSoft Installation Options for Taxware Enterprise.
- Test the Taxware integration.

Understanding PeopleSoft Integration With Taxware Enterprise

PeopleSoft communicates with Taxware Enterprise through the PeopleSoft Integration Broker. To integrate with the Taxware Enterprise tax solution, you must perform the following configuration steps:

1. Set up your local integration gateway and load the gateway connectors.

The Integration Broker uses the HTTPTARGET connector to communicate with Taxware Enterprise.

See *Enterprise PeopleTools 8.50 PeopleBook: Integration Broker*, "Managing Integration Gateways"

2. Activate the TAX_INTEGRATION service operation queue.
3. Activate the service operations and routings:

- GET_GEOCODE_REQ
- DO_TAXCALC_REQ

See Managing Service Operations, *Enterprise PeopleTools 8.50 PeopleBook: Integration Broker*

See Managing Routing Definitions, *Enterprise PeopleTools 8.50 PeopleBook: Integration Broker*

4. Activate the PSFT_TAX node.

5. Set Taxware as the Tax Vendor on the PeopleSoft Financials/Supply Chain Installation Options page and set the appropriate Taxware Enterprise options on the Tax Provider Installation page.

See [Chapter 18, "Integrating With Taxware Enterprise," Setting Up PeopleSoft Installation Options for Taxware Enterprise, page 338.](#)

Note. When you switch from one Tax Vendor Application to another, such as switching from Taxware Sales and Use Tax to Taxware Enterprise, any geocodes associated with address records in the PeopleSoft database must be upgraded before tax calculations can be sent to the tax vendor software. The Tax Provider Installation page will display the geocode upgrade process status. You should run the process, allow it to complete successfully, or fix any errors that occur, before proceeding.

6. Configure Billing, Order Management, and Purchasing business units to calculate sales and use taxes through a tax vendor and set business-unit level tax vendor options.

See [Chapter 15, "Calculating Sales and Use Tax in Supply Chain Management," Setting Up Third-Party Tax Solutions, page 306.](#)

Configuring Taxware Enterprise Integration

This section discusses how to:

- Activate the TAX_INTEGRATION service operation queue.
- Activate the service operations.
- Activate the routings.
- Activate the PSFT_TAX node.

Pages Used to Configure Taxware Enterprise Integration

<i>Page Name</i>	<i>Definition Name</i>	<i>Navigation</i>	<i>Usage</i>
Queue Definitions	IB_QUEUEDEFN	PeopleTools, Integration Broker, Integration Setup, Queues	Activate the TAX_INTEGRATION service operation queue.
Service Operation - General	IB_SERVICE	PeopleTools, Integration Broker, Integration Setup, Service Operations	Activate the service operations.
Service Operations - Routings	IB_SERVICETRNGS	PeopleTools, Integration Broker, Integration Setup, Service Operations Click the Routings tab.	Activate the routings.
Node Definitions	IB_NODE	PeopleTools, Integration Broker, Integration Setup, Nodes	Activate tax node .

Activating the TAX_INTEGRATION Service Operation Queue

Access the Queue Definitions page (PeopleTools, Integration Broker, Integration Setup, Queues).

For the TAX_INTEGRATION queue, verify that Queue Status is *Run*.

Activate the Service Operations

Access the Service Operations - General page (PeopleTools, Integration Broker, Integration Setup, Service Operations, General).

PeopleSoft delivers service operations in PeopleSoft Integration Broker with a default status of *Inactive*. You must activate each service operation before attempting to send or receive data from a third-party source, such as Taxware. To setup a service operation use the information in the table below and refer to the setup instruction in the PeopleSoft Supply Chain Management Integrations 9.1 PeopleBook, "Implementing Integrations" chapter, Setting Up Service Operations section.

<i>Service Operation</i>	<i>Direction and Type</i>	<i>Handlers</i>	<i>Chunking Available ?</i>	<i>Integrates With</i>
GET_GEOCODE_REQ	Outbound Synchronous		No	third-party system, for example Taxware Enterprise
DO_TAXCALC_REQ	Outbound Synchronous		No	third-party system, for example Taxware Enterprise

See [Chapter 3, "Implementing Integrations," Setting Up Service Operations, page 69](#).

See *Enterprise PeopleTools 8.50 PeopleBook: Integration Broker*

Activating the Routings

Activate the Service Operations - Routings page.

Activate the DO_TAXCALC_REQ and the GET_GEOCODE_REQ routings for the PSFT_TAX node.

- For the DO_TAXCALC_REQ routing, set the Value field of the PrimaryURL property to the endpoint of the tax software's tax calculation request function.

Typically this will be: `http://HOST:PORT/taxwareServlet/servlet/TaxwareAdapter`. Replace *HOST:PORT* with the address of the Taxware Enterprise adapter.

- For the GET_GEOCODE_REQ routing, set the Value field of the PrimaryURL property to the endpoint of the tax software's geocode request function.

Typically this will be: `http://HOST:PORT/taxwareServlet/servlet/TaxwareAdapter`. Replace *HOST:PORT* with the address of the Taxware Enterprise adapter.

See Manage Routing Definitions, *Enterprise PeopleTools 8.50 PeopleBook: Integration Broker*

Activating the PSFT_TAX Node

Access the Node Definitions page (PeopleTools, Integration Broker, Integration Setup, Nodes, Node Definitions).

Verify that the PSFT_TAX node is active.

See Adding and Configuring Nodes, *Enterprise PeopleTools 8.50 PeopleBook: Integration Broker*

Setting Up PeopleSoft Installation Options for Taxware Enterprise

The Set Up Financials/Supply Chain, Install, Tax Provider Installation page provides the following options for Taxware Enterprise:

Note. To display options for Taxware Enterprise, *Taxware* must be chosen as the Tax Vendor on the Overall Installation Options page and *Taxware Enterprise* as the Taxware Tax Application on the Tax Provider Installation page.

Tax Vendor Call Options

Select whether taxes rules will be applied to individual lines or to an entire invoice. The options are:

- *Doc Level*: apply tax rules to entire invoices.
- *Line Level*: apply tax rules line-by-line.

The *Doc Level* option allows you to take advantage of invoice and multiline maximum tax rules in some jurisdictions, but when you choose the Doc Level option, returns and credits must be carried out by issuing a full invoice credit and rebill.

The *Line Level* option allows more flexibility when issuing credits and returns, but prevents you from taking advantage of maximum tax rules at the invoice or multiline level. This option should be chosen when it is not an acceptable practice to issue a full invoice credit and rebill when an individual line must be credited.

Tax Vendor Call – Payables

Select how tax rules are applied when sales and use tax liabilities are calculated in the Accounts Payable application. Tax rules on transactions from Purchasing are always applied line by line, regardless of the value in this field.

Tax Vendor Call – Sales	Select how tax calculation transactions from the Billing application are sent to Taxware. Transactions from Order Management that are fully paid at sales order entry time also use this value; otherwise, they will always be sent line by line.
Tax Vendor Upgrade Status	Displays the status of the process run when the tax vendor application is changed. The process updates the geocodes associated with addresses in PeopleSoft.
Message Node Name	Set to the node setup for the exchange of messages between the PeopleSoft Integration Broker and Taxware Enterprise. Typically, the node name is <i>PSFT_TAX</i> .
Tax Exemption Override Allowed	Allows tax exemption certificates to be maintained in PeopleSoft. If tax exemption overrides are not allowed, exemptions must be maintained within the Taxware application.

Testing the Taxware Enterprise Integration

To test the Taxware Enterprise integration, click the Test Tax Install button on the Tax Provider Installation page. Enter the organization code defined in Taxware Enterprise in the box that appears. The system will send a test transaction to Taxware and should report a Geocode and nonzero tax amount. If an error message appears or the tax amount is zero, then there is a problem with the tax installation that must be corrected.

Chapter 19

Integrating with Taxware Sales and Use Tax

This chapter provides an overview of the PeopleSoft Business Interlinks used to integrate with the Taxware Sales and Use Tax application and discusses how to:

- Identify Taxware plug-in locations.
- Identify Taxware dll and shared library locations.
- Set up variables for the Taxware database location.
- Set up PeopleSoft installation options for Taxware Sales and Use Tax.
- Test the Taxware installation.
- Troubleshoot installation errors.

See Also

[Integrating with Sales and Use Tax Applications](#)

Taxware Sales/Use Tax, STEP and VeraZip® Systems PeopleSoft Link Installation Notes

Taxware Universal Tax Link Technical Reference Manual

Understanding PeopleSoft Business Interlinks to Taxware Sales and Use Tax

PeopleSoft delivers two business interlink objects to interact with Taxware for both online and batch transactions: TAXWARE_CALCTAX and TAXWARE_GEOCODES. The business interlink objects communicate with Taxware Sales and Use Tax Series through an interlink plug-in provided by Taxware. The interlink plug-in file name is `pstwlink.dll` and it must be installed in the interface drivers directory.

UNIX Environments

In UNIX environments, the business interlink algorithmically converts the file name format from that of a Windows DLL to that of a UNIX shared library or shared object. The business interlink adds the prefix *lib* to the name, and replaces the extension, *DLL*, with the appropriate extension for the current UNIX platform.

For example, the business interlink changes the file name `pstwlink.dll` to `libpstwlink.sl` before each call to the interlink plug-in.

See Also

<https://support.oracle.com/CSP/ui/flash.html>

Enterprise PeopleTools 8.50 PeopleBook: PeopleCode API Reference

Identifying Taxware Plug-in Locations

By default, the PeopleSoft system searches for the interlink plug-in in the interface drivers directory, as described in the following table:

<i>Location</i>	<i>Mode</i>
<code><PS_HOME>\bin\client\winx86\interface drivers</code>	For two-tier testing on Windows.
<code><PS_HOME>\bin\server\winx86\interface drivers</code>	For Windows application server and PeopleSoft Process Scheduler server.
<code><PS_HOME>/bin/interfacedrivers</code>	For UNIX application server and PeopleSoft Process Scheduler server.

These directories also contain the XML script files that describe the interlink plug-in structure which were used to create the delivered business interlink objects in the PeopleSoft system. The XML script files have the same name as the Windows DLL plug-in, except that the .XML extension is used instead of the .DLL extension.

When you purchase the Taxware software, Taxware provides the interlink plug-in that you must place in these directories. The copy under the Windows directory `<PS_HOME>\bin\client\winx86\InterfaceDrivers` is not used in production. The PeopleSoft Process Scheduler server and the application server use the plug-in copy in `<PS_HOME>\bin\server\winx86\InterfaceDrivers` on Windows, or `<PS_HOME>/bin/interfacedrivers` on UNIX.

Application Server Configurations

The application server configuration file has the following entry, which you can use to change the plug-in default location:

```
[PSTOOLS]
=====
; General settings for PSTOOLS
=====
;Uncomment this to specify an alternate directory to search for Interface Drivers.
;Business Interlink Driver Directory=
```

Process Scheduler Configurations

The PeopleSoft Process Scheduler configuration file contains the following entry, which you can use to change the plug-in default location:

```
-----
;Uncomment to specify an alternate directory to search for Interface Drivers.
;Business Interlink Driver Directory=
```

Identifying Taxware DLLs and Shared Library Locations

Taxware-supplied DLLs or shared libraries can be placed in the following locations:

Note. Refer to the Taxware documentation for more information.

Windows NT

Typically, the Taxware DLLs should be placed in the same directory as the PeopleSoft main executable file:

<i>Location</i>	<i>Mode</i>
<PS_HOME>\bin\client\winx86	For two-tier testing on Windows.
<PS_HOME>\bin\server\winx86	For Windows application server and PeopleSoft Process Scheduler server.

UNIX

Typically, the Taxware shared libraries should be placed in the same directory with the other PeopleSoft libraries. This directory is <PS_HOME>/bin. It is usually one of the directories pointed to by the LIBPATH environment variable set up in the psconfig.sh UNIX shell script.

If the system cannot find either the plug-in DLL/shared library or Taxware supplied DLL/shared library, an interlink connectivity error appears.

Setting Up Variables for the Taxware Database Location

This section discusses how to:

- Set up Taxware on a Microsoft Windows NT or Windows 2000 platform.
- Set up Taxware on a UNIX platform.

Setting Up Taxware on a Microsoft Windows NT or Windows 2000 Platform

Taxware provides three INI files that you need to set up to point to the location of the Taxware database directories:

- AVPTAX.INI
- AVPSTEP.INI
- AVPZIP.INI

Place all three files in the WINNT directory. Each file contains a set of pointer variables that you should point to the location where the Taxware database files were placed during Taxware software installation.

Note. Taxware opens the database files in read/write mode, even when only reading from them. You may encounter problems with permissions.

Setting Up Taxware on a UNIX Platform

You must set up several environment variables with the location of the Taxware database files. Taxware provides a script called ENVARS that contains all the variables that need to be defined. In ENVARS, provide values for these variables, and then run the ENVARS script when starting the application server and PeopleSoft Process Scheduler. A typical place to run the ENVARS script is in `psconfig.sh`.

Note. Taxware opens the database files in read/write mode. Consequently, you may encounter problems with permissions.

Setting Up PeopleSoft Installation Options for Taxware Sales and Use Tax

The Set Up Financials/Supply Chain, Install, Tax Provider Installation page provides the following options for Taxware Sales and Use Tax:

Note. To display these options, *Taxware* must be chosen as the Tax Vendor on the Overall Installation Options page and *Taxware Sales and Use Tax* as the Taxware Tax Application on the Tax Provider Installation page.

Using STEP	Select this option if you use the Taxware STEP module.
-------------------	--

Reason Code Matching Select one of two options to determine how you want to handle tax certificate entry reason lookup in STEP.

Only Exact Reason Code Match: This is the more restrictive option. Taxware finds only tax certificates that were entered with the exact reason code you set up on the bill line. If you select this option, you must add the Taxware reason codes as translate values for the field TAX_EXEMPT_RC. Only add those reason codes you expect to be sent to PeopleSoft.

Use Default Record: Taxware looks for an exact match. If it doesn't find one, it uses a default tax certificate for exemption.

Certificate Level Enter an option that determines which taxing jurisdiction level tax certificates apply.

Selecting *Individual Certificate Levels* enables STEP to look for certificates at all individual levels and exempt tax only for those levels at which a certificate is found.

Selecting *State Level Only* prompts STEP to look for certificates at the state level only.

Testing the Taxware Sales and Use Tax Installation


To test the Taxware Sales and Use Tax installation, click the Test Tax Install button on the Tax Provider Installation page. The system will send a test transaction to Taxware and should report a Geocode and nonzero tax amount. If an error message appears or the tax amount is zero, then there is a problem with the tax installation that must be corrected.

Troubleshooting Installation Errors

The sections discuss error messages that you may receive and suggestions for resolving the errors. For batch processing, similar error messages are placed in the message log of each failed process.

Two-Tier Testing, Interlink Tester With Plug-in or Vendor DLL Not Accessible

This message appears:



Cannot load plug-in error message

Check the client directories to ensure the plug-in and the Taxware DLLs are in the correct directories. Check the Taxware documentation for a complete list of required DLLs. This error may also be related to changes that you make to the Configuration Manager to change the location of the default interlink directory.

Three-Tier Geocode Look-up With the Interlink Plug-in Not Accessible

Check the directories on the computer running the application server and ensure that the plug-in and the Taxware DLLs are in the correct directories. Check the Taxware documentation for a complete list of required DLLs. This error may also be related to changes that you make to the Configuration Manager to change the location of the default interlink directory. Also check permissions of the plug-in and vendor DLLs.

Three-Tier Where the Taxware Open Fails on Geocode Look-up

This error message appears when the Taxware software detects invalid database pointers, permissions issues or other open failures:



Tax vendor error message

Check the INI files or UNIX psconfig.sh environment variables to ensure that entries are pointing to the correct locations. Additionally, you should check for permissions problems.

Appendix A

Scenarios for Integration With PeopleSoft Supply Chain Management

This appendix discusses real-life scenarios for using PeopleSoft EIPs. We provide an overview discussion of EIP examples and discuss how to:

- Set up the Sales Order Load EIP.
- Process the Sales Order Load EIP.
- Set up the Sales Orders Acknowledgement EIP.
- Process the Sales Orders Acknowledgement EIP.
- Set up the Purchase Order Dispatch EIP.
- Process the Purchase Order Dispatch EIP.
- Set up the Advanced Shipping Notice EIP.
- Process the Advanced Shipping Notice EIP.
- Set up the Billing Invoice EIP.
- Process the Billing Invoice EIP.

Understanding This Appendix

We are providing examples of the most commonly used SCM EIPs. EIP setup and processing is similar for EIPs of the same design pattern, so you can use this information and apply it to other EIPs. In this appendix, we discuss setting up and processing the following EIPs:

- Sales Order Load
- Sales Order Acknowledgement
- Purchase Order Dispatch
- Advanced Shipment Notice
- Billing Invoice

See [Chapter 3, "Implementing Integrations," Setting Up Service Operations, page 69.](#)

See [Chapter 2, "Understanding PeopleSoft Supply Chain Management Enterprise Integration Points," PeopleSoft SCM Inbound EIPs, page 7.](#)

See [Chapter 2, "Understanding PeopleSoft Supply Chain Management Enterprise Integration Points," PeopleSoft SCM Outbound EIPs, page 10.](#)

<i>EIP</i>	<i>Description</i>
Sales Order	Loads sales orders.
Sales Order Acknowledgement	Sends message acknowledging receipt of sales order.
Purchase Order Dispatch	Purchase order dispatched to a vendor using the Publish Outbound Message process
Advanced Shipping Notice	Notifies customers that their sales orders have been shipped using the Publish Outbound Message process.
Billing Invoice	Invoice sent out to a customer using the Publish Outbound Message process.

Note. The real-life scenarios described within this PeopleBook may not conform to the business rules and procedures within your organization. These scenarios should not be construed as consulting or implementation advice for your specific industry or your individual organization. The information here should be adapted or even disregarded based on the needs of your organization. PeopleSoft does not guarantee that the information included here will work as intended within your customized environment.

Common Elements in this Appendix

Asynchronous	Messages that do not require a response. These messages are sent to the destination system as one-way messages, and are used for publish and subscribe messages where there may be a lapse in time between the message being sent and received.
Batch Publish	Use this design pattern to publish messages from a batch application. The batch application can be a COBOL or Structured Query Report program that takes either a procedural or set-based approach, or it can be an Application Engine set-based program.
Batch Subscribe	This design pattern enables you to perform edits against messages in sets. This can be a useful technique for high volume data, including millions of inbound rows. This design pattern is useful when you know that a single message definition may contain multiple instances of a transaction, or when you must reuse an existing batch program.
Component Publish	In this design pattern, the transaction or setup data that you want to send out of PeopleSoft is being updated by using a PeopleSoft component. In this case, the data is already in the component buffer, and the Publish PeopleCode function is used to publish a message.

Full Table Publish	Use this design pattern to populate an entire copy of a table onto a remote database or legacy system. Generally, full data replication occurs with setup tables, or relatively static, low-volume tables that are keyed by setID. When a copy of a table exists on the remote system, incremental updates can be used.
Full Table Subscribe	Use this design pattern to subscribe to messages that contain an entire copy of a table that is published from a remote database or legacy system. Generally, full data replication occurs with setup tables, or relatively static, low-volume tables that are keyed by setID. When a copy of a table exists on the remote system, incremental updates can be used.
Synchronous	Occurring or existing at the same time. Used for messages that are sent out and receive an immediate response.

Example: Setting Up the Sales Order Load EIP

This section discusses the Sales Order Load EIP.

Understanding the Sales Order Load EIP

The Sales Order Load EIP is an asynchronous inbound service operation used to load sales orders from a third-party into PeopleSoft Order Management. The Sales Order Load EIP meets EDI requirements of the X.12 850 transaction set.

Before you can receive sales orders using with the Sales Order Load EIP, you must:

<i>Type of Setup</i>	<i>Steps</i>
Complete application setup	None for this message.
Complete Integration Broker setup	• Activate the SALES_ORDER_LOAD service operation. • Verify the queue is in run mode. • Activate the handler. • Activate the routing. • Confirm the parameters of the routing definition. • Verify the node is active. • Define rules to load EDI flat files.
Complete Enterprise Component setup	Define rules to load flat files not using an EDI format.

Page Used to Set Up the Sales Order Load EIP

<i>Page Name</i>	<i>Definition Name</i>	<i>Navigation</i>	<i>Usage</i>
Service Operations-General	IB_SERVICE	PeopleTools, Integration Broker, Integration Setup, Service Operations, General	Define and activate a service operation.
Service Operations-Handlers	IB_SERVICEHDLR	PeopleTools, Integration Broker, Integration Setup, Service Operations, Handlers	Activate one or more service operation handlers.
Service Operations-Routings	IB_SERVICERTNGS	PeopleTools, Integration Broker, Integration Setup, Service Operations, Routings	Define and activate routing definitions on the service operation.
Queue Definitions	IB_QUEUEDEFN	- PeopleTools, Integration Broker, Integration Setup, Service Operations, General. Select the Queue link attached to this service operation. - PeopleTools, Integration Broker, Integration Setup, Queues	Activate the queue used by the service operation.
Routings-Parameters	IB_ROUTINGDEFNDOC	- PeopleTools, Integration Broker, Integration Setup, Service Operations, Routings. Select the link attached to the routing definition name, then select the Parameters tab. - PeopleTools, Integration Broker, Integration Setup, Routings, Parameters	Verify the external service alias name, nodes, and transform programs used by this routing.
Node Definitions	IB_NODE	PeopleTools, Integration Broker, Integration Setup, Nodes, Node Definitions	Activate node used by the service operation.
Inbound File Loader Rules	PSIBINFILERULE	PeopleTools, Integration Broker, File Utilities, Inbound File Loader Rules	Establish inbound file rules to load sales order data from a flat file using an EDI X.12 850 format.

<i>Page Name</i>	<i>Definition Name</i>	<i>Navigation</i>	<i>Usage</i>
File Inbound	EO_FILE_INBOUND	Enterprise Components, Integration Definitions, Inbound File Rule	Establish inbound file rules to load sales order data from a flat file not using an EDI format.

Activating the Sales Order Load Service Operations

Use the PeopleSoft Integration Broker to activate the SALES_ORDER_LOAD service operations.

Access the Service Operations-General page (PeopleTools, Integration Broker, Integration Setup, Service Operations, General).

General		Handlers	Routings
Service Operation:	SALES_ORDER_LOAD		
Operation Type:	Asynchronous - One Way		
*Operation Description:	Sales Order Load		
Operation Comments:			☐ User/Password Required *Security Verification: None
Object Owner ID:	Order Management		
Operation Alias:			
Service Operation Security			
Default Service Operation Version			
*Version:	VERSION_1		☒ Default ☐ Active
Version Description:	Sales Order Load		Routing Status Any-to-Local: Exists Local-to-Local: Does not exist Local-to-Atom: Does not exist.
Version Comments:			Routing Actions Upon Save ☐ Regenerate Any-to-Local ☐ Generate Local-to-Local Warning: Regenerating sets all routing field values to their initial state.
☐ Non-Repudiation ☐ Runtime Schema Validation Introspection			
Message Information			
Type:	Request		
Message.Version:	SALES_ORDER_LOAD.VERSION_1		View Message
*Queue Name:	SALES_ORDER_LOAD		View Queue Add New Queue
Save Return to Search Add Version			

Service Operations-General page

For the SALES_ORDER_LOAD service operation, select the Active check box for the applicable service operation version. If the desired version is not the default version for the service operation, the default version must also be activated.

If the inbound sales order data is a flat file using the EDI format X.12 850, then you must activate the EDI_TXN_850 service operation in addition to the SALES_ORDER_LOAD service operation.

On the General tab of the Service Operations component, select the View Queue link at the bottom of the page to access the Queue Definitions page.

See Also

Enterprise PeopleTools 8.50 PeopleBook: Integration Broker

Verifying the Queue is in Run Mode

Access the Queue Definitions page (PeopleTools, Integration Broker, Integration Setup, Queues).

Queue Definitions

Queue Name:SALES_ORDER_LOAD

Description:Sales Order Inbound Channel

Comments:Message Channel for Sales Order Inbound Messages

☒ Archive☐ Unordered

Queue Status:Pause

Object Owner ID:Ord Mgmt

Operations Assigned to Queue

Service Operations	Version
EDI_TXN_840	VERSION_1
EDI_TXN_850	VERSION_1
SALES_CRM_ORDER_CHANGE_LOAD	VERSION_1
SALES_CRM_ORDER_LOAD	VERSION_1
SALES_CRM_QUOTE_LOAD	VERSION_1
SALES_ORDER_CHANGE_LOAD	VERSION_1
SALES_ORDER_LOAD	VERSION_1
SALES_QUOTE_LOAD	VERSION_1

Save

Return

Define Partitioning Fields

Include	Field	Alias Name
☐	OPERATIONNAME	
☐	PUBLISHER	
☐	PUBPROC	

Add Field

Queue Definitions page

For the SALES_ORDER_LOAD queue, verify the Queue Status field has a value of *Run*.

Click the Return button to go back to the Service Operations component.

Activating the Handler

Access the Service Operations-Handlers page (PeopleTools, Integration Broker, Integration Setup, Service Operations, Handlers).

General **Handlers** Routings

Service Operation: SALES_ORDER_LOAD
Default Version: VERSION_1
Operation Type: Asynchronous - One Way

Handlers						Customize	Find	View All	First	1 of 1	Last
*Name	*Type	Sequence	*Implementation	*Status							
SalesOrderLoad	OnNotify		Application Class	Active	Details	+	-				

Save [Return to Search](#)

Service Operations-Handlers page

For the SALES_ORDER_LOAD service operation, click the Handlers tab of the Service Operations component. Select the value of *Active* in the Status field for the SalesOrderLoad handler.

Activating the Routings

Access the Service Operations-Routings page (PeopleTools, Integration Broker, Integration Setup, Service Operations, Routings).

General **Handlers** **Routings**

Service Operation: SALES_ORDER_LOAD
Default Version: VERSION_1
Routing Name:

Routing Definitions					
Selected	Name	Version	Operation Type	Sender Node	Receiver Node
☐	SALES_ORDER_LOAD EDI 850	VERSION_1	Asynch	~~ANY~~	OM910DVL
☐	SALES_ORDER_LOAD	VERSION_1	Asynch	~~ANY~~	OM910DVL

Save [Return to Search](#)

Service Operations-Routings page

For the SALES_ORDER_LOAD service operation, click the Routings tab of the Service Operations component. Activate an inbound routing definition for each sender node and external alias name that will be permitted to send in sales order data. In this example, both delivered routings permit data to be sent from any valid node, but each routing has a unique external alias and purpose. To activate a routing, select the check box next to the routing definition and click the Activate Selected Routings button. There are two delivered routing definitions:

- The SALES_ORDER_LOAD routing definition is used to receive inbound sales order data using an XML format.
- The SALES_ORDER_LOAD_ED1_850 routing definition is used to receive inbound sales order data using the EDI X.12 850 transaction format and transform the data to the standard PeopleSoft format for sales orders.

Select the link attached to the routing definition name to access the Routings component and confirm the routing definition parameters.

Confirming the Parameters of the Routing Definition

Access the Routings-Parameters page (PeopleTools, Integration Broker, Integration Setup, Service Operations, Routings. Select the link attached to the routing definition name, then select the Parameters tab).

The screenshot displays the 'Routing Definitions - Parameters' page. At the top, there are three tabs: 'Routing Definitions', 'Parameters' (which is active), and 'Routing Properties'. Below the tabs, the following routing details are listed:

- Routing Name:** SALES_ORDER_LOAD_ED1_850
- Service Operation:** SALES_ORDER_LOAD
- Service Operation Version:** VERSION_1
- Sender Node:** ~~ANY~~
- Receiver Node:** OM910DVL

Below these details is a section titled 'Parameters' with a blue header. This section contains the following fields:

- Type:** Inbound Request
- External Alias:** EDI_TXN_850.VERSION_1 (with a link 'Alias References' below it)
- Message.Ver into Transform 1:** EDI_TXN_850.VERSION_1 (with a magnifying glass icon)
- Transform Program 1:** EDI_850_I (with a magnifying glass icon)
- Transform Program 2:** (empty field with a magnifying glass icon)
- Message.Ver out of Transforms:** SALES_ORDER_LOAD.VERSION_1 (with a magnifying glass icon)

At the bottom of the 'Parameters' section are two buttons: 'Save' and 'Return'.

Routings- Parameters page

On the Routings tab of the Service Operations component, select the link attached to the routing definition name. This link accesses the Routing Definitions component. Select the Parameters tab and complete the following steps:

1. Confirm the external alias name in the External Alias field for the routing is correct. When sending or receiving data, the Integration Broker determines which routing to use by referring to the external alias name, not the routing name.
2. Add or change the transform programs on this routing definition. A routing definition defines the sending and receiving nodes for a transaction and specifies any inbound and outbound transformations to invoke. A transform program is a type of PeopleSoft Application Engine program that can convert data from one format to another; for example, from XML to a flat file. Use a transform program when one node sends a request or response message with a data structure different from the structure required by the other node. You must decide, based on your environment, to change, remove, or add transform programs. The SALES_ORDER_LOAD_ED1_850 routing definition is delivered with the transform program, ED1_850_I, to convert incoming data from the EDI X.12 850 transaction format to the standard PeopleSoft format for sales orders. If you are not using EDI then you will want to use the SALES_ORDER_LOAD routing definition instead.

Verifying the Node is Active

Access the Node Definitions page (PeopleTools, Integration Broker, Integration Setup, Nodes, Node Definitions).

The screenshot displays the 'Node Definitions' page in PeopleTools. The page has a tabbed interface with 'Node Definitions' selected. The main form contains the following fields and controls:

- Node Name:** OM910DVL
- *Description:** PS FSCM - Fin, Supply Chain
- Node Type:** PIA
- *Authentication Option:** None (dropdown menu)
- *Default User ID:** VP1
- Hub Node:** (empty field)
- Master Node:** (empty field)
- Company ID:** (empty field)
- IB Throttle Threshold:** (empty field)
- Image Name:** (empty field)
- Codeset Group Name:** (empty field)

On the right side, there are checkboxes for the following properties:

- ☒ Default Local Node
- ☒ Local Node
- ☒ Active Node
- ☐ Non-Repudiation
- ☐ Segment Aware

Buttons at the top right include 'Copy Node' and 'Rename Node'. At the bottom, there are buttons for 'Save', 'Contact/Notes', 'Properties', and 'Return to Search'.

Node Definitions page

Verify the Active Node check box has been selected for any nodes used in the routings that you activated on the Service Operations-Routings page for SALES_ORDER_LOAD service operation. If the routings are from "ANY" node, verify each node you plan to integrate from is active.

Setting the Inbound File Rule for EDI Flat File Data

Access the Inbound File Loader Rules page (PeopleTools, Integration Broker, File Utilities, Inbound File Loader Rules).

Inbound File Loader Rules

File Identifier: EDI_TXN_850

Processing Options

*Inbound File: c:\temp\850_inbound.edi

File Type

☒ Data File

☐ Index File

File Layout ID:

*Status: Inactive

Message Options

☐ Replace Data

Publish From: PSFT_XINBND

Alternate Processing

Root Package ID: SCM_UTILITIES

Path: EDI:File

Class Name: EDI_File

Post-Processing

Program Name:

Section:

File Layout Mappings

Customize | Find | View All | First | 1 of 1 | Last

Sequence	*Definition Name	*Service Operation		
1	EDI_TXN_850	EDI_TXN_850	+	-

Inbound File Loader Rules page

For inbound flat file data using the EDI X.12 850 format, configure and activate the inbound file loader rule within PeopleSoft Integration Broker.

See Also

Enterprise PeopleTools 8.50 PeopleBook: Integration Broker, "Using the Inbound File Loader Utility"

Setting the Inbound File Rule for Non-EDI Flat File Data

Access the File Inbound page (Enterprise Components, Integration Definitions, Inbound File Rule).

File Inbound

File Identifier: SCM_INBOUND_EDI

*Inbound File: C:\Temp\Scm_inbound_index.txt

☒ Index Flag

*Status: Inactive

File Layout ID: 998

LUW Size:

Program

Section:

Name:

☐ Create Message Header

☐ Create Message Trailer

File Layout

Customize | Find | View All | First 1 of 11 Last

	*Definition Name	*Message Name
1	SALES_ORDER	SALES_ORDER_LOAD

File Inbound page

For inbound flat files that are not using the EDI X.12 850 format, configure and activate the inbound file rule within the PeopleSoft Enterprise Components menu.

1. Adding the Definition Name of *SALES_ORDER*, and Message Name of *SALES_ORDER_LOAD*.
2. Confirming that the Status field is set to *Active*.

Note. If the file identified in the Inbound File field is an index file, as shown in the page shot above, then the index file lists the names of a set of data files to be processed. Each line of the index file must reference a plain text file using a file name with full directory path information. The wildcards * and ? may be used only in the file name and not in the directory path.

See Also

PeopleSoft Enterprise Components for PeopleSoft Enterprise Financial Management Solutions, Enterprise Service Automation, Asset Lifecycle Management, and Supply Chain Management 9.1 PeopleBook

Example: Processing the Sales Order Load EIP

This section discusses how you process inbound sales orders.

Pages Used to Process Sales Orders Load EIP

Page Name	Definition Name	Navigation	Usage
Inbound File Processing	PSIBFILERUNCNTL	PeopleTools, Integration Broker, File Utilities, Inbound File Processing	Launch this process to load sales order data from a flat file using an EDI X.12 850 format. The data is loaded into PeopleSoft's staging tables.
Inbound File	EO_FILETOMSG	Enterprise Components, Integration Definitions, Initiate Processes, Inbound File Publish	Launch this process to bring sales order data in a non-EDI flat file (EDI X.12 850 format) into PeopleSoft's inbound staging tables.
Electronic Commerce	RUN_OM_EC	Order Management, Electronic Commerce, Process Staged Orders/RFQs	Launch this process to load inbound sales order data from the inbound staging tables to the PeopleSoft production tables.
Data Def Maint (Data Definition Maintenance)	EO_EIP_CTL_MAINT	SCM Integrations, Transaction Error Handling, Maintain Data Definitions	View data detail or correct errors for inbound sales order transactions.
Error Summary	OM_EIP_ORDERS	Click the Detail button on the Data Definition Maintenance page.	View the error queue for inbound sales order data that failed to load into the PeopleSoft production tables.
Order Completion	RUN_OM_BACKGRND	Order Management, Quotes and Orders, Process Orders, Order Completion	Run the Order Completion process to complete processing for the request for all inbound sales order data.

Loading EDI Flat File Data

Access the Inbound File Processing page (PeopleTools, Integration Broker, File Utilities, Inbound File Processing).

Inbound File Processing

Run Control ID: 850Report ManagerProcess MonitorRun

Process Request

Find | View All | First | 1 of 1 | Last

*Request ID:

+

-

Process Frequency

☐ Process Once

☐ Always Process

☐ Don't Run

Parameters

*File Identifier:

☐ Index Flag

File Layout ID:

Inbound File:

Inbound File Processing page

For inbound flat file data using the EDI X.12 850 format, use the Inbound File Processing run control page to launch the Application Engine process PTIB_INFILE that initiates the file-to-message processing. The file-to-message processing function reads the file and publishes it as a message.

File Identifier	Select or enter the name of the file identifier that you set up in the Inbound File Loader Rules page. The file identifier is tied to the publish rules.
Index Flag	A read-only field that indicates if the file being processed is an index file or a data file. When checked, the Inbound File Loader utility is processing an index file.
File Layout ID	A read-only field that displays the file layout ID associated with the file in the Inbound File Loader Rules page.
Inbound File	A read-only field that displays the name of the file being processed.

See Also

Enterprise PeopleTools 8.50 PeopleBook: Integration Broker, "Using the Inbound File Loader Utility"

Loading Non-EDI Flat File Data

Access the Inbound File process page (Enterprise Components, Integration Definitions, Initiate Processes, Inbound File Publish).

Inbound File

Run Control ID: SalesOrder

Report Manager

Process Monitor

Run

Process Request

Find | View All | First | 1 of 1 | Last

*Request ID:

SO

+ -

Description:

Inbound Sales Orders

Process Frequency

Once

☒ Always

Don't Run

Parameters

*File Identifier:

Index Flag: ☐

File Layout ID:

Inbound File:

Inbound File process page

For inbound flat file data not using the EDI format, use the Inbound File run control page to launch an Application Engine process that initiates the file-to-message processing. The file-to-message processing function reads the file and publishes it as a message.

See Also

PeopleSoft Enterprise Components for PeopleSoft Enterprise Financial Management Solutions, Enterprise Service Automation, Asset Lifecycle Management, and Supply Chain Management 9.1 PeopleBook

Running Electronic Commerce

Access the Run Electronic Commerce page (Order Management, Electronic Commerce, Process Staged Orders/RFQs).

Process Staged Orders/RFQs

Run Control ID: SalesOrders [Report Manager](#) [Process Monitor](#) [Run](#)

☐ Delete Staging Records

Process Request Parameters				
Customize Find View All First 1 of 1 Last				
Business Unit	Transaction Type	EIP Control ID	Source Code	
US001	PO	1653645435956907000000001		+ -

Post Process Options

- ☒ Run Order Completion
- ☒ Run Hold Checking
- ☒ Run Credit Checking
- ☒ Run Populate Demand
- ☒ Run Reservations

Electronic Commerce page

The Electronic Commerce process (OM_EC) is part of the overall inbound electronic commerce flow and is the process that takes sales orders that are loaded in the staging tables and validates the fields that are on the record to insure that the values are correct. The process performs these steps:

- Edits the data, such as customer numbers and units of measure, to ensure that they are valid.
- Converts the customer's product or item number to a PeopleSoft product identifier, when a PeopleSoft product identifier is not provided.
- Assigns PeopleSoft order numbers.
- Sets system defaults and status flags.
- Validates data changes to ensure that they are valid.
- Loads data into the production order tables (order staging data that is found to have errors is not loaded into the production tables until the errors are resolved).

See Also

PeopleSoft Enterprise Order Management 9.1 PeopleBook, "Using Sales Order and Quotation Enterprise Integration Points," Running Electronic Commerce for Inbound Sales Orders and Quote EIPs

Correcting Errors

Access the Data Definition Maintenance page (SCM Integrations, Transaction Error Handling, Maintain Data Definitions).

Data Def Maint

Transaction Type

PO

Inbound Sales Order - 850

Grid Select

Staged

SetID

Unit

Reference

Status

Search

Stage Table Data

Customize | Find | View All | First 1-3 of 3 Last

Stage Data

Reference

Publish Data

Date Time

Process Instance

		Status	EIP Control ID	Transaction Type	Description	User
1		Complete	30000000000005167000000001	PO	Inbound Sales Order - 850	SAMPLE
2		Complete	3000000000000126000000001	PO	Inbound Sales Order - 850	SAMPLE
3		Error	1653645435956907000000001	PO	Inbound Sales Order - 850	VP1

Data Definition Maintenance page

Use the Data Definition Maintenance page to view the status of the transaction. Select a Transaction Type of *PO*. Enter a business Unit. Click the Search button.

Click the Details icon to access the Error Summary page where you can view and correct errors.

Correct Order/RFQ Errors

Transaction Type: PO EIP Control ID: 1653645435956907000000001

Status: Error found on the transaction

Error Queue			
Field Properties		Edit Properties	Additional Information
		Field Name	Record
1		CARRIER_ID	ORD_HEADER_EC
2		STATE	ORD_ADDR_EC
3		TEXT80	ORD_CDATA_EC
4		TEXT254	ORD_NOTE_EC

[Data Definition Maintenance](#)
 [Header](#)
 [Line](#)
 [Schedule](#)
[Addresses](#)
[Notes](#)
[User Defined Reference](#)

Error Summary page

Navigate to the Header, Line, Schedule, Addresses, Notes, or User Defined References to fix errors.

See Also

PeopleSoft Enterprise Order Management 9.1 PeopleBook, "Using Sales Order and Quotation Enterprise Integration Points"

Chapter 4, "Processing Enterprise Integration Points (EIPs)," Using Data Definition Maintenance, page 93

Completing the Orders

Access the Order Completion page (Order Management, Quotes and Orders, Process Orders, Order Completion).

Order Completion

Run Control ID: Complete
[Report Manager](#)
[Process Monitor](#)

Process Request Parameters

From Business Unit:		To Business Unit:	
From Order Number:		To Order No:	
From Order Date:		To Order Date:	
From Order Group:		To Order Group:	
From Customer ID:		To Customer ID:	
From Source Code:		To Source Code:	

Post Process Options

- ☒ Run Hold Checking
- ☒ Run Credit Checking
- ☒ Run Populate Demand
- ☒ Run Reservations

Order Completion page

The Order Completion/Repricing process (OM_BACKGRND) completes processing for sales orders that are entered into PeopleSoft Order Management by several methods, including flat file and XML messages. Completing this process enables you to access the orders from the Order Entry Form component.

Enter the selection criteria, and click Run.

See Also

PeopleSoft Enterprise Order Management 9.1 PeopleBook, "Processing Sales Orders," Running Order Completion/Repricing

Example: Setting Up the Sales Order Acknowledgement EIP

This section discusses the Sales Order Acknowledgement EIP.

Understanding the Sales Order Acknowledgment EIP

The Sales Order Acknowledgement EIP is an asynchronous outbound service operation to send an acknowledgement to your customers that a sales order has been received. The data from this service operation is passed to a third-party system or to PeopleSoft CRM. The Sales Order Acknowledgement EIP meets EDI requirements of the X.12 855 transaction set.

Before you can send order acknowledgements with the Sales Order Acknowledgement EIP, you must:

Type of Setup	Steps
Complete application setup	Associate customers receiving sales order acknowledgements with an <i>ACKN</i> document code and a preferred communication value of <i>XML Only</i> or <i>XML and Print</i> . If PeopleSoft Order Management is installed, you set up these values on the Contact Additional Info page in the Maintain Contact component.
Complete Integration Broker setup	• Activate the <code>SALES_ORDER_ACKNOWLEDGEMENT</code> service operation. • Verify the queue is in run mode. • Activate the handler. • Activate the routing. • Confirm the parameters of the routing definition. • Verify the node is active.
Complete Enterprise Component setup	• Activate the associated batch publish rule and specify the appropriate output for the message (an XML-based message or a flat file). If you are using message chunking, select a chunking rule ID. • If you are using message chunking, set up the chunking rule mapping definitions.

See Also

[Chapter 3, "Implementing Integrations," Setting Up Service Operations, page 69](#)

[Chapter 6, "Integrating With a Third-Party Point-of-Use Supplier System," page 129](#)

[Chapter 7, "Integrating With a Third-Party Surgical Resource Software Application," page 139](#)

Pages Used to Set Up the Sales Order Acknowledgement EIP

<i>Page Name</i>	<i>Definition Name</i>	<i>Navigation</i>	<i>Usage</i>
Contact	CONTACT	Customers, Contact Information	Maintain information about each contact.
Contact Customer	CONTACT_CUST_PAGE	Click the Contact Customer Information link on the Contact page.	Indicate the primary ship to contact.
Contact Additional Info	CONTACT_ADDTL_INFO	Click the Additional Info link for a contact on the Contact Customer page.	Enter the preferred communication method for the selected document.
Service Operations-General	IB_SERVICE	PeopleTools, Integration Broker, Integration Setup, Service Operations, General	Define and activate a service operation.
Service Operations-Handlers	IB_SERVICEHDLR	PeopleTools, Integration Broker, Integration Setup, Service Operations, Handlers	Activate one or more service operation handlers.
Service Operations-Routings	IB_SERVICERTNGS	PeopleTools, Integration Broker, Integration Setup, Service Operations, Routings	Define and activate routing definitions on the service operation.
Routings-Parameters	IB_ROUTINGDEFNDOC	- PeopleTools, Integration Broker, Integration Setup, Service Operations, Routings. Select the link attached to the routing definition name, then select the Parameters tab. - PeopleTools, Integration Broker, Integration Setup, Routings, Parameters	Verify the external service alias name, nodes, and transform programs used by this routing.

Page Name	Definition Name	Navigation	Usage
Queue Definitions	IB_QUEUEDEFN	- PeopleTools, Integration Broker, Integration Setup, Service Operations, General. Select the Queue link attached to this service operation. - PeopleTools, Integration Broker, Integration Setup, Queues	Activate the queue used by the service operation.
Node Definitions	IB_NODE	PeopleTools, Integration Broker, Integration Setup, Nodes, Node Definitions	Activate node used by the service operation.
Nodes-Connectors	IB_NODECONN	PeopleTools, Integration Broker, Integration Setup, Nodes, Connectors	For an outbound service operation, verify the node is connected to the correct network.
Batch Publish Rules	EO_MSGPUBATCH	Enterprise Components, Integration Definitions, Batch Publish Rules	Set up publication rules. You must activate a publish rule for the publication messages you create to follow. This rule includes instructions on message chunking, if necessary.
Customer ID Chunk	OM_CHUNKCUSTID	SCM Integrations, Chunking Rule, CustID to Node Mapping	Set up chunking by customer for the batch publish rule.

Verifying Contacts

Access the Contact page (Customers, Contact Information) using the Customer ID in the *correct history* mode.

You must ensure that the customer you are interacting with has a contact set up to accept EDI transmissions, and that the contact is a ship to contact.

Contact

SetID: SHARE Contact ID: 10

Contact Information

Find | View All | First 1 of 1 Last

*Effective Date:

01/01/1990

*Status:

Active

*Name:

Jeffreys, Jenny

*Contact Flag:

External

Title:

Manager of All

External Contact

Email ID:

pibomuser01@ap6023fems.us.oracle.com

Salutation Code:

MS

*Preferred Communication:

E-mail & Print

Language Code:

English

Person ID:

Contact Customer Information

Contact Phone and Type

User Profile

Staffing Information

Contact page

Access the Contact Customer page using the Contact Customer Information link on the Contact page.

Contact Customer

SetID: SHARE Contact ID: 10

Contact Information

Find | View All | First 1 of 1 Last

Effective Date:

01/01/1990

Jeffreys, Jenny

Link Contact to Customer

Customize | Find | View All | First 1-3 of 24 Last

Customer

Self Service Security

*Customer SetID	*Customer ID	Customer Name	Location		Credit Card	Documentation	Primary Bill To	Primary Ship To	Primary Sold To		
SHARE	1000	Alliance Group		Main Office	Credit Card	Documentation	☒	☒	☒		
SHARE	1001	Apex Systems		Corporate HQ	Credit Card	Documentation	☒	☒	☒		
SHARE	1002	Easy Solutions		Oakland Office	Credit Card	Documentation	☒	☒	☒		

Contact Information

Contact Phone and Type

User Profile

Contact Customer page

Select the Primary Ship To check box to receive the proper shipping notifications.

Under the Documentation link, make sure the Document Code is *ACKN* (order acknowledgement), and Preferred Communication is *XML & Print* or *XML Only*.

Documentation

SetID: SHARE Contact: 10 Jeffreys, Jenny Effective Date: 01/01/1990

Customer SetID: SHARE Customer: 1000 Alliance Group

Documentation			Customize	Find	View All	First	1 of 1	Last
*Document Code	*Preferred Communication	Number of Copies						
ACKN	XML only	1						

Documentation page

See Also

PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook, "Maintaining Contacts"

Activating the Sales Order Acknowledgement Service Operation

Use the PeopleSoft Integration Broker to activate the Sales Order Acknowledgement service operation.

Access the Service Operations-General page (PeopleTools, Integration Broker, Integration Setup, Service Operations, General).

General Handlers Routings

Service Operation: SALES_ORDER_ACKNOWLEDGEMENT

Operation Type: Asynchronous - One Way

***Operation Description:** Sales Order Acknowledgement

Operation Comments:

☐ User/Password Required

***Security Verification:** None

Object Owner ID: Order Management

Operation Alias:

[Service Operation Security](#)

Default Service Operation Version

***Version:** VERSION_3

Version Description: Sales Order Acknowledgement

Version Comments:

☐ Non-Repudiation

☐ Runtime Schema Validation

[Intropection](#)

☒ Default ☐ Active

Routing Status

Any-to-Local: Does not exist

Local-to-Local: Does not exist

Local-to-Atom: Does not exist

Routing Actions Upon Save

☐ Generate Any-to-Local

☐ Generate Local-to-Local

Message Information

Type: Request

Message.Version: SALES_ORDER_ACKNOWLEDGEMENT [View Message](#)

***Queue Name:** SALES_ORDER_ACKNOWLEDGEMENT [View Queue](#) [Add New Queue](#)

Service Operations-General page (1 of 2)

Non-Default Versions [Customize](#) | [Find](#) | [First](#) | [1-2 of 2](#) | [Last](#)

Version	Description	Active
VERSION_1	Sales Order Acknowledgement	☐
VERSION_2	Sales Order Acknowledgement	☐

[Save](#) [Return to Search](#) [Add Version](#)

[General](#) | [Handlers](#) | [Routings](#)

Service Operations-General page (2 of 2)

For the SALES_ORDER_ACKNOWLEDGEMENT service operation, select the Active check box for the applicable service operation version. If the desired version is not the default version for the service operation, the default version must also be activated.

On the General tab of the Service Operations component, select the View Queue link at the bottom of the page to access the Queue Definitions page.

Service Operation Versions

The Default Service Operation Version group box displays the most current version of this service operation. If there have been changes to the PeopleSoft application that have required the service operation to change, for example new fields or tables, then the Non-Default Versions group box displays any older versions of the service operation based on the older release of the PeopleSoft application. The default version is always the current version, however you can use a non-default version to communicate with third-party systems that want to receive the data based on an old version. Select the link in the Non-Default Versions box to access the Service Operation Version page. This page contains information about the non-default version, including message and queue. In addition, the Logical Transforms group box contains transforms to convert the data to or from the default version. A transform program is a type of PeopleSoft Application Engine program that can convert data from one format to another. Based on your environment, you will review and possibly change these transforms.

See Also

Enterprise PeopleTools 8.50 PeopleBook: Integration Broker

Verifying the Queue is in Run Mode

Access the Queue Definitions page (PeopleTools, Integration Broker, Integration Setup, Service Operations, General. Select the Queue link attached to this service operation).

Queue Definitions

Queue Name:

SALES_ORDER_ACKNOWLEDGEMENT

Description:

Sales Order Outbound Channel

Comments:

Message Channel for Sales Order Outbound Messages

☒ Archive

☐ Unordered

Queue Status:

Pause

Object Owner ID:

Ord Mgmt

Operations Assigned to Queue

Service Operations

View All

First

1-9 of 9

Last

Service Operation	Version
SALES_ORDER_ACKNOWLEDGEMENT	VERSION_2
SALES_ORDER_ACKNOWLEDGEMENT	VERSION_1
SALES_ORDER_ACKNOWLEDGEMENT	VERSION_3
SALES_ORDER_CHANGE_NOTICE	VERSION_3
SALES_ORDER_CHANGE_NOTICE	VERSION_1
SALES_ORDER_CHANGE_NOTICE	VERSION_2
SALES_QUOTE_NOTICE	VERSION_2
SALES_QUOTE_NOTICE	VERSION_3
SALES_QUOTE_NOTICE	VERSION_1

Define Partitioning Fields

Common Fields

View All

First

1-10 of 12

Last

Include	Field	Alias Name
☐	SETID	
☐	CUST_ID	
☐	BUSINESS_UNIT	
☐	ORDER_NO	
☐	SOURCE_CD	
☐	BUSINESS_UNIT_PC	
☐	IN_PROCESS_FLG	
☐	PROCESS_INSTANCE	
☐	AUDIT_ACTN	
☐	OPERATIONNAME	

Add Field

Save

Return

Queue Definitions page

For the SALES_ORDER_ACKNOWLEDGEMENT queue, verify the Queue Status field has a value of *Run*. Click the Return button to go back to the Service Operations component.

Activating the Handler

Access the Service Operations-Handlers page (PeopleTools, Integration Broker, Integration Setup, Service Operations, Handlers).

General Handlers Routings

Service Operation: SALES_ORDER_ACKNOWLEDGEMENT

Default Version: VERSION_3

Operation Type: Asynchronous - One Way

*Name	*Type	Sequence	*Implementation	*Status		
ROUTERSENDHDLR	OnRoute		Application Class	Active	Details	+ -

Save Return to Search

Service Operations-Handlers page

For the SALES_ORDER_ACKNOWLEDGEMENT service operation, click the Handlers tab of the Service Operations component. If you want to use chunking, select the value of *Active* in the Status field for the OnRoute handler.

Activating the Routings

Access the Service Operations-Routings page (PeopleTools, Integration Broker, Integration Setup, Service Operations, Routings).

General Handlers **Routings**

Service Operation: SALES_ORDER_ACKNOWLEDGEMENT

Default Version: VERSION_3

Routing Name:

Routing Definitions							
Selected	Name	Version	Operation Type	Sender Node	Receiver Node	Direction	Status
☐	SALES_ORDER_ACKNOWLEDGEMENT_CR	VERSION_1	Asynch	OM910DVL	PSFT_CR	Outbound	Inactive
☒	SALES_ORDER_ACKNOWLEDGEMENT_V1	VERSION_1	Asynch	OM910DVL	PSFT_XOUTBND	Outbound	Inactive
☐	SALES_ORDER_ACKNOWLEDGEMENT_V2	VERSION_2	Asynch	OM910DVL	PSFT_XOUTBND	Outbound	Inactive
☐	SALES_ORDER_ACKNOWLEDGEMENT_V3	VERSION_3	Asynch	OM910DVL	PSFT_XOUTBND	Outbound	Inactive
☐	SALES_ORDER_ACKNOWLEDG_ED1_855	VERSION_3	Asynch	OM910DVL	PSFT_XOUTBND	Outbound	Inactive

[Return to Search](#)

Service Operations-Routings page

For the SALES_ORDER_ACKNOWLEDGEMENT service operation, click the Routings tab of the Service Operations component. Activate an outbound routing definition for each receiver node and external alias name that data will be sent to. To activate a routing, select the check box next to the routing definition and click the Activate Selected Routings button. The following routing definitions are predefined:

- The SALES_ORDER_ACKNOWLEDG_ED1_855 routing definition sends outbound sales order acknowledgements using the EDI X.12 855 format as a flat file. The data is converted from the PeopleSoft standard XML format to the EDI X.12 855 transaction format and then from XML to a flat file. If you wish to send the data as an XML file using the EDI X.12 855 format, then alter the routing definition to remove the second transform program.
- The SALES_ORDER_ACKNOWLEDGEMENT_CR routing definition sends outbound sales order acknowledgements using the PeopleSoft standard XML format to PeopleSoft CRM.
- The SALES_ORDER_ACKNOWLEDGEMENT_V1 routing definition sends outbound sales order acknowledgements using the PeopleSoft standard XML format and converts the data from the current service operation version (version 2) to an older version (version 1) of the service operation. This routing definition is used when you are sending data to a third-party system that is still using an older version of the service operation.
- The SALES_ORDER_ACKNOWLEDGEMENT_V2 routing definition sends outbound sales order acknowledgements using the PeopleSoft standard XML format. This routing definition is used when you are sending data to a third-party system that is using the current version of the service operation.

Note. You do not need to select a routing definition if the batch publish rule is set up to post to a flat file only.

Confirming the Parameters of the Routing Definition

Access the Routings-Parameters page (PeopleTools, Integration Broker, Integration Setup, Routings, Parameters).

Routing Definitions		Parameters	Connector Properties	Routing Properties
Routing Name:	SALES_ORDER_ACKNOWLEDG_EDJ_855			
Service Operation:	SALES_ORDER_ACKNOWLEDGEMENT			
Service Operation Version:	VERSION_3			
Sender Node:	OM910DVL			
Receiver Node:	PSFT_XOUTBND			
Parameters				
Type:	Outbound Request			
External Alias:	EDI_TXN_855.VERSION_1			
	Alias References WS Security			
Message.Ver into Transform 1:	SALES_ORDER_ACKNOWLEDGEMENT.VERS			
Transform Program 1:	EDI_855_O			
Transform Program 2:	XML_TO_FILE			
Message.Ver out of Transforms:	EDI_TXN_855.VERSION_1			
Save		Return		

Routings-Parameters page

On the Routings tab of the Service Operations component, select the link attached to the routing definition name. This link accesses the Routing Definitions component. Select the Parameters tab and complete the following steps:

1. Confirm the external alias name in the External Alias field for the routing is correct. When sending or receiving data, the Integration Broker determines which routing to use by referring to the external alias name, not the routing name.
2. Verify or change the transform programs on this routing definition. A routing definition defines the sending and receiving nodes for a transaction and specifies any inbound and outbound transformations to invoke. A transform program is a type of PeopleSoft Application Engine program that can convert data from one format to another; for example, from XML to a flat file. Use a transform program when one node sends a request or response message with a data structure different from the structure required by the other node. You must decide, based on your environment, to change, remove, or add transform programs. The SALES_ORDER_ACKNOWLEDG_EDJ_855 routing definition is delivered with two transform programs. The EDI_855_O transform program converts outbound sales order acknowledgements from the standard PeopleSoft XML format to the EDI X.12 855 transaction format (still in XML). The XML_TO_FILE transform program converts the EDI X.12 855 formatted data from XML to a flat file format. You can remove the XML_TO_FILE transform program to send your data in the XML EDI X.12 855 format. If you are not using EDI then you will want to use the SALES_ORDER_ACKNOWLEDGEMENT_V2 routing definition instead.

The transform program, to convert data from the current version of a service operation to an older version, is located on the Service Operation Version page of the non-default version. Select the non-default version on the Service Operations-General page to access the Service Operation Version page.

Verifying the Node is Active

Access the Node Definitions page (PeopleTools, Integration Broker, Integration Setup, Nodes, Node Definitions).

Node Definitions

Connectors

Portal

WS Security

Routings

Node Name:

PSFT_XOUTBND

Copy Node

*Description:

External Outbound node

Rename Node

*Node Type:

External

☐ Default Local Node

☐ Local Node

☒ Active Node

☐ Non-Repudiation

☐ Segment Aware

Delete Node

*Authentication Option:

None

*Default User ID:

VP1

WSIL URL:

Hub Node:

Master Node:

Company ID:

IB Throttle Threshold:

Image Name:

Codeset Group Name:

External User ID:

External Password:

External Version:

Save

Contact/Notes

Properties

Return to Search

Node Definitions page

Verify the Active Node check box has been selected for any nodes used in the routings that you activated on the Service Operations-Routings page for SALES_ORDER_ACKNOWLEDGEMENT service operation.

Verifying the Node is Connected to the Network

Access the Nodes-Connectors page (PeopleTools, Integration Broker, Integration Setup, Nodes, Connectors).

Node Definitions Connectors Portal WS Security Routings

Node Name PSFT_XOUTBND Ping Node

Details

Gateway ID: LOCAL

Connector ID: PSFTTARGET

PeopleSoft Nodes are configured via the [Gateway Setup Properties](#)

This connector does not have properties. Use Gateways Page to setup.

Save

Return to Search

Nodes-Connectors page

For an outbound service operation, verify the node or routing is connected to the correct network using the Gateway ID and Connector ID fields. Depending on the file output location, you may need a password. If a password is needed, you should use the password encryption utility on this page.

Note. Your database administrator will need to assist you with this setup.

Activate the Batch Publish Rule

Access the Batch Publish Rules page (Enterprise Components, Integration Definitions, Batch Publish Rules).

Batch Publish Rules Record Mapping Batch Programs

Service Operation: SALES_ORDER_ACKNOWLEDGEMENT [Service Operation](#)

Operation Description: Sales Order Acknowledgement Message.Version: SALES_ORDER_ACKNOWLEDGEMENT.VERSION_3

Publish Rule Definition Find | View All First 1 of 2 Last

*Publish Rule ID: SALES_ORDER_ACK_CUSTOMER_ID

*Description: Sales Order Acknowledgement

*Status: Inactive

Chunking Rule ID:

Alternate Chunk

Table:

Message Options

☐ Create Message Header

☐ Create Message Trailer

Output Format

☒ Message

☐ Flat File

☐ Flat File with Control Record

Batch Publish Rules page

For the SALES_ORDER_ACKNOWLEDGEMENT message name (service operation):

1. Select *Active* Status to activate this publish rule definition.

2. Select the appropriate Output Format. The PeopleSoft Application Engine program can create either an Extensible Markup Language (XML) message that flows through PeopleSoft Integration Broker architecture or a flat file generated on the PeopleSoft Process Scheduler server and not published elsewhere.
3. If you want to use message chunking, configure a chunking rule and then enter it in the Chunking Rule ID field.

Setting Up Chunking for the Batch Publish Rule

Access the Customer ID Chunk page (SCM Integrations, Chunking Rule, CustID to Node Mapping).

CustID to Node Mapping

Chunking Rule ID: CUSTOMER_ID Chunk by Setid and Customer Id

Effective Date Find | View All | First | 1 of 1 | Last

*Effective Date: 01/01/1900 *Status: Active

Message Node Find | View All | First | 1 of 1 | Last

*Node: [Search Field]

Customers Customize | Find | View All | First | 1 of 1 | Last

*SetID	*Customer ID
[Search Field]	[Search Field]

Customer ID Chunk page

If using chunking for the batch publish rule, set up the chunking rule mapping definitions. You can use a delivered chunking rule or create a new chunking rule.

If using the CUSTOMER_ID chunking rule ID, access the Customer ID Chunk page.

Select the node for each customer that receives electronic data.

Chunking is only needed if you have requirements to break up the outbound data and send them to different destinations based on attributes in the message such as business unit or customer ID. For example, use chunking to send a single customer's messages to a specific node setup for that trading partner. If you are using a middleware product to actually determine trading partner destinations then a single transaction with all trading partner transactions can usually be sent directly to the middleware product. You would not need to activate message chunking in this situation.

See Also

Chapter 3, "Implementing Integrations," Setting Up Chunking, page 75

Example: Processing the Sales Order Acknowledgement EIP

This section discusses processing the Sales Order Acknowledgement EIP.

Pages Used to Process the Sales Order Acknowledgement EIPs

<i>Page Name</i>	<i>Definition Name</i>	<i>Navigation</i>	<i>Usage</i>
Publish Outbound Message	IN_RUN_PUB_MSG	SCM Integrations, Publish Outbound Message	Initiate the outbound message publish process for outbound SCM messages that use the batch publish design pattern.
Order Acknowledgement Message Selection Criteria	OM_RUN_OUTBOUND_EC	Select the Sales Order Acknowledgement check box on the page to enable its link. Click the link to launch the PO Sales Order Acknowledgement page.	Enter processing options for the Sales Order Acknowledgement outbound messages. You can select processing options for only one message at a time.

Publishing Outbound Sales Order Acknowledgement Messages

Access the Publish Outbound Message page (SCM Integrations, Publish Outbound Message).

Publish Outbound Message

Run Control ID: Publish Report Manager Process Monitor Run

Language: English

Inventory Messages

- ☐ Balance Notification
- ☐ Advanced Shipping Notices
- ☐ Interunit Expected Receipts
- ☐ Internal Location Exp Receipts
- ☐ Item Status Change
- ☐ TMS Order Release
- ☐ GTIN Data Notification
- ☐ VMI Interunit Expected Receipt

Purchasing Messages

- ☐ Request for Quotation
- ☐ Purchase Order Dispatch
- ☐ Return To Vendor
- ☐ PO Expected Receipts

Order Management Messages

- ☒ [Sales Order Acknowledgement](#)
- ☐ Sales Order Change Notice
- ☐ Sales Quote Notice
- ☐ Product Price List
- ☐ Sales Order/Quote Status

Manufacturing Messages

- ☐ Production Order Update
- ☐ Item Revision
- ☐ Replenish Request Dispatch

Billing Messages

- ☐ Billing Invoice Notice

Supplier Contract Management

- ☐ Supplier Contract Syndication

Publish Outbound Message page

Click the Sales Order Acknowledgement check box, and click the Sales Order Acknowledgement link to access the Order Acknowledgement Message Selection Criteria page.

Order Acknowledgment Message Selection Criteria

Run Control ID: Publish Report Manager Process Monitor Run

Language: English

Select Processing Parameters

Business Unit:

Source Code:

*Request ID:

Description:

Outbound Messages Selected

- ☒ Order Acknowledgement Queue
- ☐ Order Change Notice Queue
- ☐ Quote Notice Queue

OK Cancel

Order Acknowledgement Message Selection Criteria page

For technical details about individual EIPs, use the Interactive Services Repository (ISR) in the My Oracle Support website located at <https://support.oracle.com/CSP/ui/flash.html>.

Example: Setting Up the Purchase Order Dispatch EIP

This section discusses setting up the Purchase Order Dispatch EIP.

Understanding the Purchase Order Dispatch EIP

The Purchase Order Dispatch EIP is an outbound asynchronous service operation to send purchase orders and purchase order change requests (change orders) to vendors. If enabled, the system generates a Purchase Order Dispatch EIP transaction when you run the Publish Outbound Message process. This message also supports flat-file processing. You can specify whether to send purchase orders based on business unit or vendor.

Before you can publish messages with the Purchase Order Dispatch EIP, you must:

<i>Types of Setup</i>	<i>Steps</i>
Complete application setup	On the purchase order, specify EDX as the PO dispatch method.
Complete Integration Broker setup	• Activate the PURCHASE_ORDER_DISPATCH service operation. • Verify the queue is in run mode. • Activate the handler. • Activate the routing. • Confirm the parameters of the routing definition. • Verify the node is active.
Complete Enterprise Component setup	• Activate the associated batch publish rule and specify the appropriate output for the message (an XML-based message or a flat file). If you are using message chunking, select a chunking rule ID. • If you are using message chunking, set up the chunking rule mapping definitions.

Pages Used to Set Up the Purchase Order Dispatch EIP

<i>Page Name</i>	<i>Definition Name</i>	<i>Navigation</i>	<i>Usage</i>
PO Header Details	PO_HDR_DTL	Purchasing, Purchase Orders, Add/Update POs. Click the Header Details link on the Purchase Order page.	Enter or change PO header information online.
Service Operations-General	IB_SERVICE	PeopleTools, Integration Broker, Integration Setup, Service Operations, General	Define and activate a service operation.
Service Operations-Handlers	IB_SERVICEHDLR	PeopleTools, Integration Broker, Integration Setup, Service Operations, Handlers	Activate one or more service operation handlers.
Service Operations-Routings	IB_SERVICERTNGS	PeopleTools, Integration Broker, Integration Setup, Service Operations, Routings	Define and activate routing definitions on the service operation.
Routings-Parameters	IB_ROUTINGDEFNDOC	- PeopleTools, Integration Broker, Integration Setup, Service Operations, Routings. Select the link attached to the routing definition name, then select the Parameters tab. - PeopleTools, Integration Broker, Integration Setup, Routings, Parameters	Verify the external service alias name, nodes, and transform programs used by this routing.
Queue Definitions	IB_QUEUEDEFN	- PeopleTools, Integration Broker, Integration Setup, Service Operations, General. Select the Queue link attached to this service operation. - PeopleTools, Integration Broker, Integration Setup, Queues	Activate the queue used by the service operation.

Page Name	Definition Name	Navigation	Usage
Node Definitions	IB_NODE	PeopleTools, Integration Broker, Integration Setup, Nodes, Node Definitions	Activate node used by the service operation.
Nodes-Connectors	IB_NODECONN	PeopleTools, Integration Broker, Integration Setup, Nodes, Connectors	For an outbound service operation, verify the node is connected to the correct network.
Batch Publish Rules	EO_MSGPUBATCH	Enterprise Components, Integration Definitions, Batch Publish Rules	Set up publication rules. You must activate a publish rule for the publication messages you create to follow. This rule includes instructions on message chunking, if necessary.
Setup Vendor to Node	PO_CHUNK_VENDOR	SCM Integrations, Chunking Rule, Manage ChunkRule Vendor ID Map	Set up chunking for the batch publish rule.

Setting the Purchase Order Dispatch Method

Access the PO Header Details page (Purchasing, Purchase Orders, Add/Update POs).

Maintain Purchase Order

PO Header Details

Business Unit:US001

PO ID:NEXT

Vendor:

PO Details

Vendor:

PO Date:08/11/2009

*PO Type:GEN

*Billing Location:US001

Origin:

Billing Address

☐ Tax Exempt ID:

Letter of Credit ID:

Currency

Currency Code:USD

Base Currency:USD

Rate Date:08/11/2009

Exchange Rate:1.00000000

Rate Type:CRRNT

Process Control Option

Acknowledgements required for:Not required

☒ Dispatch

*Method:EDX

Template ID:PO_DISPATCH_1

OK

Cancel

Refresh

PO Header Details page

Select the Dispatch check box to ensure that the system dispatches the PO. Also, select a dispatch Method of *EDX*.

See Also

PeopleSoft Enterprise Purchasing 9.1 PeopleBook, "Creating Purchase Orders Online"

Activating the Purchase Order Dispatch Service Operation

Use the PeopleSoft Integration Broker to activate the Purchase Order Dispatch service operation.

Access the Service Operations-General page (PeopleTools, Integration Broker, Integration Setup, Service Operations, General).

General Handlers Routings

Service Operation: PURCHASE_ORDER_DISPATCH

Operation Type: Asynchronous - One Way

*Operation Description: Purchase Order Dispatch

Operation Comments:

Object Owner ID: Purchasing

Operation Alias:

☐ User/Password Required

*Security Verification: None

[Service Operation Security](#)

Default Service Operation Version

*Version: VERSION_3

Version Description: Purchase Order Dispatch

Version Comments:

☐ Non-Repudiation

☐ Runtime Schema Validation

[Introspection](#)

☒ Default ☒ Active

Routing Status

Any-to-Local: Does not exist

Local-to-Local: Does not exist

Local-to-Atom: Does not exist

Routing Actions Upon Save

☐ Generate Any-to-Local

☐ Generate Local-to-Local

Message Information

Type: Request

Message.Version: PURCHASE_ORDER_DISPATCH.VERS [View Message](#)

*Queue Name: PURCHASE_ORDER [View Queue](#) [Add New Queue](#)

Service Operations-General page (1 of 2)

Non-Default Versions			Customize Find  First 1-2 of 2 Last
Version	Description	Active	
VERSION_1	Purchase Order Dispatch	☐	
VERSION_2	Purchase Order Dispatch	☐	
Save Return to Search Add Version			

Service Operations-General page (2 of 2)

For the PURCHASE_ORDER_DISPATCH service operation, select the Active check box for the applicable service operation version. If the desired version is not the default version for the service operation, the default version must also be activated.

On the General tab of the Service Operations component, select the View Queue link at the bottom of the page to access the Queue Definitions page.

Service Operation Versions

The Default Service Operation Version group box displays the most current version of this service operation. If there have been changes to the PeopleSoft application that have required the service operation to change, for example new fields or tables, then the Non-Default Versions group box displays any older versions of the service operation based on the older release of the PeopleSoft application. The default version is always the current version, however you can use a non-default version to communicate with third-party systems that want to receive the data based on an old version. Select the link in the Non-Default Versions box to access the Service Operation Version page. This page contains information about the non-default version, including message and queue. In addition, the Logical Transforms group box contains transforms to convert the data to or from the default version. A transform program is a type of PeopleSoft Application Engine program that can convert data from one format to another. Based on your environment, you will review and possibly change these transforms.

See Also

Enterprise PeopleTools 8.50 PeopleBook: Integration Broker

Verifying the Queue is in Run Mode

Access the Queue Definitions page (PeopleTools, Integration Broker, Integration Setup, Service Operations, General. Select the Queue link attached to this service operation).

Queue Definitions

Queue Name: PURCHASE_ORDER

Description: Purchase Order

Comments: Purchase Order

☒ Archive ☐ Unordered
Queue Status: Pause
Object Owner ID: Purchasing

Operations Assigned to Queue

Service Operations	Version
PO_EXPECTED_RECEIPT_BUS_UNIT	VERSION_1
PO_EXPECTED_RECEIPT_SHIPTO	VERSION_1
PURCHASE_ORDER_ACKNOWLEDGEMENT	VERSION_1
PURCHASE_ORDER_DISPATCH	VERSION_2
PURCHASE_ORDER_DISPATCH	VERSION_3
PURCHASE_ORDER_DISPATCH	VERSION_1

Define Partitioning Fields

Common Fields	Field	Alias Name
☐	BUSINESS_UNIT	
☐	PO_ID	
☐	OPERATIONNAME	
☐	PUBLISHER	
☐	PUBPROC	

Save Return

Add Field

Queue Definitions page

For the PURCHASE_ORDER queue, verify the Queue Status field has a value of *Run*.

Click the Return button to go back to the Service Operations component.

Activating the Handler

Access the Service Operations-Handlers page (PeopleTools, Integration Broker, Integration Setup, Service Operations, Handlers).

General **Handlers** Routings

Service Operation: PURCHASE_ORDER_DISPATCH
 Default Version: VERSION_3
 Operation Type: Asynchronous - One Way

Handlers						Customize	Find	View All	First	1 of 1	Last
*Name	*Type	Sequence	*Implementation	*Status							
ROUTERSENDHLR	OnRoute		Application Class	Active	Details	+	-				

Save [Return to Search](#)

Service Operations-Handlers page

For the PURCHASE_ORDER_DISPATCH service operation, click the Handlers tab of the Service Operations component. If you are using chunking, select the value of *Active* in the Status field for the OnRoute handler.

Activating the Routings

Access the Service Operations-Routings page (PeopleTools, Integration Broker, Integration Setup, Service Operations, Routings).

General Handlers **Routings**

Service Operation: PURCHASE_ORDER_DISPATCH
 Default Version: VERSION_3
 Routing Name:

Routing Definitions								Customize	Find	View All	First	1-3 of 3	Last
Selected	Name	Version	Operation Type	Sender Node	Receiver Node	Direction	Status	Results					
☐	PURCHASE_ORDER_DISPATCH	VERSION_3	Asynch	OM910DVL	PSFT_XOUTBND	Outbound	Active						
☐	PURCHASE_ORDER_DISPATCH_V1	VERSION_1	Asynch	OM910DVL	PSFT_XOUTBND	Outbound	Inactive						
☐	PURCHASE_ORDER_DISPATCH_V2	VERSION_2	Asynch	OM910DVL	PSFT_XOUTBND	Outbound	Active						

[Return to Search](#)

Service Operations-Routings page

For the PURCHASE_ORDER_DISPATCH service operation, click the Routings tab of the Service Operations component. Activate an outbound routing definition for each receiver node and external alias name that data will be sent to. To activate a routing, select the check box next to the routing definition and click the Activate Selected Routings button. The following routing definitions are predefined:

- The PURCHASE_ORDER_DISPATCH routing definition sends outbound purchase orders using the PeopleSoft standard XML format. This routing definition is used when you are sending data to a third-party system that is using the current version of the service operation.
- The PURCHASE_ORDER_DISPATCH_V1 routing definition sends outbound purchase orders using the PeopleSoft standard XML format and converts the data from the current service operation version (version 2) to an older version (version 1) of the service operation. This routing definition is used when you are sending data to a third-party system that is still using an older version of the service operation.

Note. You do not need to select a routing definition if the batch publish rule is set up to post to a flat file only.

Confirming the Parameters of the Routing Definition

Access the Routings-Parameters page (PeopleTools, Integration Broker, Integration Setup, Routings, Parameters).

Routing Definitions	Parameters	Connector Properties	Routing Properties
Routing Name: PURCHASE_ORDER_DISPATCH_V2 Service Operation: PURCHASE_ORDER_DISPATCH Service Operation Version: VERSION_2 Sender Node: OM910DVL Receiver Node: PSFT_XOUTBND			
Parameters			
Type: Outbound Request External Alias: PURCHASE_ORDER_DISPATCH.VERSION_2 Alias References WS Security			
Message.Ver into Transform 1:			
Transform Program 1:			
Transform Program 2:			
Message.Ver out of Transforms:			
Save Return			

Routings-Parameters page

On the Routings tab of the Service Operations component, select the link attached to the routing definition name. This link accesses the Routing Definitions component. Select the Parameters tab and complete the following steps:

1. Confirm the external alias name in the External Alias field for the routing is correct. When sending or receiving data, the Integration Broker determines which routing to use by referring to the external alias name, not the routing name.
2. Verify or change the transform programs on this routing definition. A routing definition defines the sending and receiving nodes for a transaction and specifies any inbound and outbound transformations to invoke. A transform program is a type of PeopleSoft Application Engine program that can convert data from one format to another; for example, from XML to a flat file. Use a transform program when one node sends a request or response message with a data structure different from the structure required by the other node. You must decide, based on your environment, to change, remove, or add transform programs.

The transform program, to convert data from the current version of a service operation to an older version, is located on the Service Operation Version page of the non-default version. Select the non-default version on the Service Operations-General page to access the Service Operation Version page.

Verifying the Node is Active

Access the Node Definitions page (PeopleTools, Integration Broker, Integration Setup, Nodes, Node Definitions).

Node Definitions

Connectors

Portal

WS Security

Routings

Node Name:

PSFT_SUPPLIER_NETWORK

Copy Node

*Description:

Supplier Network

Rename Node

*Node Type:

External

☐ Default Local Node

☐ Local Node

☒ Active Node

☐ Non-Repudiation

☐ Segment Aware

Delete Node

*Authentication Option:

None

*Default User ID:

VP1

WSIL URL:

Hub Node:

Master Node:

Company ID:

IB Throttle Threshold:

Image Name:

Codeset Group Name:

External User ID:

External Password:

External Version:

Save

Contact/Notes

Properties

Return to Search

Node Definitions page

Verify the Active Node check box has been selected for any nodes used in the routings that you activated on the Service Operations-Routings page for PURCHASE_ORDER_DISPATCH service operation.

Verifying the Node is Connected to the Network

Access the Nodes-Connectors page (PeopleTools, Integration Broker, Integration Setup, Nodes, Connectors).

Node Definitions Connectors Portal WS Security Routings

Node Name PSFT_SUPPLIER_NETWORK Ping Node

Details

Gateway ID: LOCAL

Connector ID: HTTPTARGET

Properties

Customize Find First 1 of 1 Last

*Property ID	*Property Name	Required	Value
1		☐	

▼ Password Encryption Utility

Password Confirm Password

Encrypt Encrypted Password

Save

Return to Search

Nodes-Connectors page

For an outbound service operation, verify the node or routing is connected to the correct network using the Gateway ID and Connector ID fields. Depending on the file output location, you may need a password. If a password is needed, you should use the password encryption utility on this page.

Note. Your database administrator will need to assist you with this setup.

Activate the Batch Publish Rule

Access the Batch Publish Rules page (Enterprise Components, Integration Definitions, Batch Publish Rules).

Batch Publish Rules | Record Mapping | Batch Programs

Service Operation: PURCHASE_ORDER_DISPATCH [Service Operation](#)

Operation Description: Purchase Order Dispatch Message.Version: PURCHASE_ORDER_DISPATCH.VERSION_3

Publish Rule Definition [Find](#) | [View All](#) | First 1 of 2 Last

*Publish Rule ID: PURCHASE_ORDER_DISPATCH_BU

*Description: PO Dispatch by Business Unit

*Status: Inactive

Chunking Rule ID: BUSINESS_UNIT [Search](#) Chunk by Business Unit

Alternate Chunk Table: [Search](#)

Message Options

☐ Create Message Header

☐ Create Message Trailer

Output Format

☒ Message

☐ Flat File

☐ Flat File with Control Record

Batch Publish Rules page

For the PURCHASE_ORDER_DISPATCH message name (service operation):

1. Select *ActiveStatus* to activate this publish rule definition.
2. Select the appropriate Output Format. The PeopleSoft Application Engine program can create either an Extensible Markup Language (XML) message that flows through PeopleSoft Integration Broker architecture or a flat file generated on the PeopleSoft Process Scheduler server and not published elsewhere.
3. If you want to use message chunking, configure the chunking rule and then enter it in the Chunking Rule ID field.

Setting Up Chunking for the Batch Publish Rule

Access the Setup Vendor to Node page (SCM Integrations, Chunking Rule, Manage ChunkRule Vendor ID Map).

Manage ChunkRule VendorID Map

Chunking Rule ID: **VENDOR_ID** Chunk by Vendor Id

Rule Details				
Find View All First 1 of 1 Last				
*Effective Date:	01/01/1900	*Status:	Active	

Vendor Details				
Customize Find View All First 1 of 1 Last				
*Message Node Name	*Vendor SetID	*Vendor ID	*Vendor Location	
1				+ -

Setup Vendor to Node page

If using chunking for the batch publish rule, set up the chunking rule mapping definitions. You can use a delivered chunking rule or create a new chunking rule.

If using the VENDOR_ID chunking rule ID, access the Setup Vendor to Node page. If using the BUSINESS_UNIT chunking rule ID, access the BusUnit Mapping page.

Select the node for each vendor that receives electronic data.

Chunking is only needed if you have requirements to break up the outbound data and send them to different destinations based on attributes in the message such as business unit or vendor ID. For example, use chunking to send a single vendor's messages to a specific node setup for that trading partner. If you are using a middleware product to actually determine trading partner destinations then a single transaction with all trading partner transactions can usually be sent directly to the middleware product. You would not need to activate message chunking in this situation.

See Also

[Chapter 3, "Implementing Integrations," Setting Up Chunking, page 75](#)

Example: Processing the Purchase Order Dispatch EIP

This section discusses processing the purchase order dispatch EIP.

See Also

PeopleSoft Enterprise Purchasing 9.1 PeopleBook, "Creating Purchase Orders Online"

PeopleSoft Enterprise Purchasing 9.1 PeopleBook, "Dispatching and Printing Purchase Orders"

Pages Used to Process the Purchase Order EIP

<i>Page Name</i>	<i>Definition Name</i>	<i>Navigation</i>	<i>Usage</i>
Dispatch Purchase Orders	RUN_DISP_POPO005	Purchasing, Purchase Orders, Dispatch POs	Run the PO Dispatch/Print process and dispatch POs, run the Email process, or run the PO Dispatch & Email multiprocess job.
Publish Outbound Message	IN_RUN_PUB_MSG	SCM Integrations, Publish Outbound Message	Initiate the outbound message publish process for outbound SCM messages that use the batch publish design pattern.
PO Dispatch Message Selection Criteria	PO_RUN_POD	Select Purchase Order Dispatch on the Publish Outbound Message page to enable the Purchase Order Dispatch link. Click the Purchase Order Dispatch link to launch the PO Dispatch Message Selection Criteria page.	Launch the Purchase Order Dispatch outbound transaction.

Dispatching Purchase Orders

Access the Dispatch Purchase Orders process page (Purchasing, Purchase Orders, Dispatch POs).

Dispatch POs

Run Control ID: Dispatch

[Report Manager](#) [Process Monitor](#) [Run](#)

Language: English

☒ Specified ☐ Recipient's

Process Request Parameters

Business Unit:

To:

PO ID:

[Select Purchase Order](#)

Contract SetID:

Contract ID:

Release:

From Date:

31

Through Date:

31

Vendor ID:

Buyer:

Fax Cover Page:

Template ID:

Statuses to Include

☐ Approved

☐ Dispatched

☐ Pending Cancel

Dispatch Methods to Include

☒ Print

☒ FAX

☒ EDX

☒ E-Mail

☒ Phone

Miscellaneous Options

*Chartfields:

Valid Chartfields

Change Orders:

Changed and UnChanged Orders

☐ Print Changes Only

☐ Test Dispatch

☐ Print Copy

☐ Print BU Comments

☐ Exclude POs tied to Authored Contract Documents

☒ Print PO Item Description

☐ Print Duplicate

Sort By:

Sort by Line Number

Dispatch Purchase Orders page

Ensure that the PO to be dispatched is included in your selection criteria. Click *Run* to stage POs for dispatch.

Publishing Outbound Purchase Order Messages

Access the Publish Outbound Message page (SCM Integrations, Publish Outbound Message).

396

Copyright © 1992, 2009, Oracle and/or its affiliates. All Rights Reserved.

Publish Outbound Message

Run Control ID: Publish

[Report Manager](#)

[Process Monitor](#)

Run

Language: English

Inventory Messages

☐ Balance Notification

☐ Advanced Shipping Notices

☐ Interunit Expected Receipts

☐ Internal Location Exp Receipts

☐ Item Status Change

☐ TMS Order Release

☐ GTIN Data Notification

☐ VMI Interunit Expected Receipt

Supplier Contract Management

☐ Supplier Contract Syndication

Purchasing Messages

☐ Request for Quotation

☒ [Purchase Order Dispatch](#)

☐ Return To Vendor

☐ PO Expected Receipts

Manufacturing Messages

☐ Production Order Update

☐ Item Revision

☐ Replenish Request Dispatch

Order Management Messages

☐ Sales Order Acknowledgement

☐ Sales Order Change Notice

☐ Sales Quote Notice

☐ Product Price List

☐ Sales Order/Quote Status

Billing Messages

☐ Billing Invoice Notice

Publish Outbound Message page

Click the Purchase Order Dispatch check box, and click the Purchase Order Dispatch link to access the Purchase Order Dispatch page.

Copyright © 1992, 2009, Oracle and/or its affiliates. All Rights Reserved.

397

PO Dispatch Message Selection Criteria

Run Control ID: Publish Report Manager Process Monitor **Run**

Language: English

Selection Criteria Find | View All First 1 of 1 Last

*Request ID: 1

Description:

Selection: Select BU

Type:

BU Sel Type: All BUs Business Unit:	Vendor Selection: All Vendor Vendor SetID: Vendor ID: Location:
--	--

OK Cancel

PO Dispatch Message Selection Criteria

1. Select *BU* or *Vendor* as a Selection Type.
2. If you select *BU*, the BU Sel Type fields are enabled, and you can select *All BUs* or a *1 Bus Unit*. If you select *Vendor*, the Vendor Selection Type fields are enabled, and you can select *1 Vendor* or *All Vendor*.

For technical details about individual EIPs, use the Interactive Services Repository (ISR) in the My Oracle Support website located at <https://support.oracle.com/CSP/ui/flash.html>.

Example: Setting Up the Advanced Shipping Notice EIP

This section discusses the Advanced Shipping Notice EIP.

Understanding the Advanced Shipping Notice EIP

The Advanced Shipping Notice (ASN) EIP is an asynchronous outbound service operation to notify your customers that a sales order has been shipped. The data from this service operation is passed to an external system or to the PeopleSoft CRM Field Service and CRM Order Capture applications. The Advanced Shipping Notice EIP meets EDI requirements of the X.12 856–Shipping Notice/Manifest transaction set, and is also used with warehouse management systems. An ASN transaction is generated when a sales order entered from PeopleSoft Order Management has been depleted in PeopleSoft Inventory. You can specify whether to generate the ASN for all sales order shipments in the business unit, sales orders belonging to a specific shipping ID, sales orders for a specific sold to customer, or sales orders for a specific ship to customer.

Before you can publish messages with the Advanced Shipment Notice EIP, you must:

Type of Setup	Steps
Complete application setup	• Select the Use Advanced Shipment Notice option for the business unit on the Inventory Definition - Business Unit Options page. • Associate customers receiving Advanced Shipment Notice EIP data with an ASN document code and a preferred communication value of <i>XML Only</i> or <i>XML and Print</i>. If PeopleSoft Order Management is installed, you set up these values on the Contact Additional Info page in the Contact Information component.
Complete Integration Broker setup	• Activate the ADVANCED_SHIPPING_NOTICE service operation. • Verify the queue is in run mode. • Activate the handler. • Activate the routing. • Confirm the parameters of the routing definition. • Verify the node is active and connected to the correct network.
Complete Enterprise Component setup	• Activate the associated batch publish rule and specify the appropriate output for the message (an XML-based message or a flat file). If you are using message chunking, select a chunking rule ID. • If you are using message chunking, set up the chunking rule mapping definitions.

See Also

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Creating Shipping Documentation," Creating Advanced Shipping Notices

[Chapter 6, "Integrating With a Third-Party Point-of-Use Supplier System," page 129](#)

[Chapter 7, "Integrating With a Third-Party Surgical Resource Software Application," page 139](#)

Pages Used to Set Up the Advanced Shipping Notice EIP

Page Name	Definition Name	Navigation	Usage
Business Unit Definition - Inventory Options page	BUS_UNIT_INV5	Set Up Financials/Supply Chain, Business Unit Related, Inventory, Inventory Definition, Inventory Options	Define external interfaces.
Contact	CONTACT	Customers, Contact Information	Maintain information about each contact.
Contact Customer	CONTACT_CUST_PAGE	Click the Contact Customer Information link on the Contact page.	Indicate the primary ship to contact.
Contact Additional Info	CONTACT_ADDTL_INFO	Click the Additional Info link for a contact on the Contact Customer page.	Enter the preferred communication method for the selected document.
Service Operations-General	IB_SERVICE	PeopleTools, Integration Broker, Integration Setup, Service Operations, General	Define and activate a service operation.
Service Operations-Handlers	IB_SERVICEHDLR	PeopleTools, Integration Broker, Integration Setup, Service Operations, Handlers	Activate one or more service operation handlers.
Service Operations-Routings	IB_SERVICERTNGS	PeopleTools, Integration Broker, Integration Setup, Service Operations, Routings	Define and activate routing definitions on the service operation.

Page Name	Definition Name	Navigation	Usage
Routings-Parameters	IB_ROUTINGDEFNDOC	- PeopleTools, Integration Broker, Integration Setup, Service Operations, Routings. Select the link attached to the routing definition name, then select the Parameters tab. - PeopleTools, Integration Broker, Integration Setup, Routings, Parameters	Verify the external service alias name, nodes, and transform programs used by this routing.
Queue Definitions	IB_QUEUEDEFN	- PeopleTools, Integration Broker, Integration Setup, Service Operations, General. Select the Queue link attached to this service operation. - PeopleTools, Integration Broker, Integration Setup, Queues	Activate the queue used by the service operation.
Node Definitions	IB_NODE	PeopleTools, Integration Broker, Integration Setup, Nodes, Node Definitions	Activate node used by the service operation.
Nodes-Connectors	IB_NODECONN	PeopleTools, Integration Broker, Integration Setup, Nodes, Connectors	For an outbound service operation, verify the node is connected to the correct network.
Batch Publish Rules	EO_MSGPUBATCH	Enterprise Components, Integration Definitions, Batch Publish Rules	Set up publication rules. You must activate a publish rule for the publication messages you create to follow. This rule includes instructions on message chunking, if necessary.
Customer ID Chunk	OM_CHUNKCUSTID	SCM Integrations, Chunking Rule, CustID to Node Mapping	Set up chunking for the batch publish rule.

Enabling the Inventory Business Unit

You must enable ASN generation in the business unit shipping the items.

Access the Inventory Definition - Business Unit Options page (Set Up Financials/Supply Chain, Business Unit Related, Inventory, Inventory Definition, Inventory Options).

The screenshot displays the 'Business Unit Options' tab for Business Unit US010, PHOENIX BIKE/OUTDOOR. The page is organized into several sections:

- Inventory Status:** Includes a checked checkbox for 'Incl Non-Open in Avail Qty'.
- Lot Control:** Includes checked checkboxes for 'Allow Auto-Add of New Lots' and 'Allow Lot Allocation', and an unchecked checkbox for 'Use Lot Allocation Workflow'.
- Auto Round Opt:** Features a dropdown menu for '*Automatic UOM Round Option:' set to 'Warning'.
- Financial Sanctions Screening:** Includes an unchecked checkbox for 'Screen Customer Stock Requests'.
- Consigned Purchase:** Includes an unchecked checkbox for 'Allow Transfers to Owned Loc'.
- External Interfaces:** This section is highlighted. It includes checked checkboxes for 'Use External Warehouse Control' and 'Use Advanced Shipment Notice', and unchecked checkboxes for 'Ship Using TMS Reference ID' and 'Use Internal Expected Receipt'.
- Transfer Item Copy Options:** Includes a dropdown for 'Copy Source' set to 'Copy from source item' and a 'Copy Template' field with a search icon.
- InterUnit/RMA Receiving:** Includes an unchecked checkbox for 'Auto Close Receipts'.
- Accounting:** Includes a checked checkbox for 'Combo Edit' and a dropdown for '*SpeedType Level' set to 'Off'.
- Negative Inventory:** Includes checked checkboxes for 'Allow Negative Inventory' and 'Display Warning Messages'.
- Transfer Options:** Includes an unchecked checkbox for 'Allow transfer of Released Allocations'.

At the bottom of the page, there are links to other configuration areas: Shipping Options, Replenishment Options, Revenue and Billing Defaults, RMA Defaults, and Delivery Management Definition.

Inventory Definition - Business Unit Options page

Select the Use Advanced Shipment Notice check box in the External Interfaces group box.

See Also

PeopleSoft Enterprise Inventory 9.1 PeopleBook, "Defining Your Operational Structure in PeopleSoft Inventory," Defining PeopleSoft Inventory Business Unit Attributes

Verifying Contacts

You must ensure that the customer you are interacting with has a contact set up to accept EDI transmissions, and that the contact is a ship to contact.

Access the Contact page (Customers, Contact Information) using the Customer ID in the *correct history* mode.

Contact

SetID: SHARE Contact ID: 10

Contact Information

Find | View All | First 1 of 1 Last

*Effective Date:01/01/1990

*Status:Active

*Name:Jeffreys,Jenny

*Contact Flag:External

Title:Manager of All

External Contact

Email ID:

Salutation Code:MS

*Preferred Communication:E-mail & Print

Language Code:English

Person ID:

Contact Customer Information

Contact Phone and Type

User Profile

Staffing Information

Contact page

Access the Contact Customer page using the Contact Customer Information link on the Contact page.

Contact Customer

SetID: SHARE Contact ID: 10

Contact Information

Find | View All | First 1 of 1 Last

Effective Date: 01/01/1990 Jeffreys,Jenny

Link Contact to Customer

Customize | Find | View All | First 1-3 of 24 Last

Customer

Self Service Security

*Customer SetID	*Customer ID	Customer Name	Location		Credit Card	Documentation	Primary Bill To	Primary Ship To	Primary Sold To		
SHARE	1000	Alliance Group	1	Main Office	Credit Card	Documentation	☒	☒	☒	+	-
SHARE	1001	Apex Systems	1	Corporate HQ	Credit Card	Documentation	☒	☒	☒	+	-
SHARE	1002	Easy Solutions	1	Oakland Office	Credit Card	Documentation	☒	☒	☒	+	-

Contact Information

Contact Phone and Type

User Profile

Contact Customer page

Select the Primary Ship To check box to receive the proper shipping notifications.

Click the Documentation link corresponding to the appropriate customer to access the Contact Additional Info page.

Documentation

SetID: SHARE Contact: 10 Jeffreys, Jenny Effective Date: 01/01/1990

Customer SetID: SHARE Customer: 1000 Alliance Group

Documentation

Customize | Find | View All | First 1 of 1 Last

*Document Code	*Preferred Communication	Number of Copies		
ASN	XML & Print	1		

Contact Additional Info page

Under the Documentation group box, make sure the Document Code is *ASN* (advanced shipping notification), and Preferred Communication is *XML & Print* or *XML Only*.

See Also

PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook, "Maintaining Contacts," Entering Contact Credit Card Information

Activating the ASN Service Operation

Use the PeopleSoft Integration Broker to activate the Advanced Shipping Notice service operation.

Access the Service Operations-General page (PeopleTools, Integration Broker, Integration Setup, Service Operations, General).

General Handlers Routings

Service Operation: ADVANCED_SHIPPING_NOTICE

Operation Type: Asynchronous - One Way

*Operation Description: Advanced Shipping Notice

Operation Comments:

☐ User/Password Required

*Security Verification: None

Object Owner ID: Inventory

Operation Alias:

[Service Operation Security](#)

Default Service Operation Version

*Version: VERSION_2

Version Description: Advanced Shipping Notice

Version Comments:

☐ Non-Repudiation

☐ Runtime Schema Validation

[Introspection](#)

☒ Default ☐ Active

Routing Status

Any-to-Local: Does not exist

Local-to-Local: Does not exist

Local-to-Atom: Does not exist.

Routing Actions Upon Save

☐ Generate Any-to-Local

☐ Generate Local-to-Local

Message Information

Type: Request

Message.Version: ADVANCED_SHIPPING_NOTICE.VERS [View Message](#)

*Queue Name: ADVANCED_SHIPPING_NOTICE [View Queue](#) [Add New Queue](#)

Service Operations-General page (1 of 2)

Non-Default Versions [Customize](#) [Find](#) [First](#) [1 of 1](#) [Last](#)

Version	Description	Active
VERSION_1	Advanced Shipping Notice	☐

[Save](#) [Return to Search](#) [Add Version](#)

[General](#) | [Handlers](#) | [Routings](#)

Service Operations-General page (2 of 2)

For the ADVANCED_SHIPPING_NOTICE service operation, select the Active check box for the applicable service operation version. If the desired version is not the default version for the service operation, the default version must also be activated.

On the General tab of the Service Operations component, select the View Queue link at the bottom of the page to access the Queue Definitions page.

Service Operation Versions

The Default Service Operation Version group box displays the most current version of this service operation. If there have been changes to the PeopleSoft application that have required the service operation to change, for example new fields or tables, then the Non-Default Versions group box displays any older versions of the service operation based on the older release of the PeopleSoft application. The default version is always the current version, however you can use a non-default version to communicate with third-party systems that want to receive the data based on an old version. Select the link in the Non-Default Versions box to access the Service Operation Version page. This page contains information about the non-default version, including message and queue. In addition, the Logical Transforms group box contains transforms to convert the data to or from the default version. A transform program is a type of PeopleSoft Application Engine program that can convert data from one format to another. Based on your environment, you will review and possibly change these transforms.

See Also

PeopleTools 8.50 PeopleBook: PeopleSoft Integration Broker

Verifying the Queue is in Run Mode

Access the Queue Definitions page (PeopleTools, Integration Broker, Integration Setup, Service Operations, General. Select the Queue link attached to this service operation).

Queue Definitions

Queue Name: ADVANCED_SHIPPING_NOTICE

Description: Advanced Shipping Notice

Comments: Advanced Shipping Notice

☒ Archive

☐ Unordered

Queue Status: Pause

Object Owner ID: Inventory

Operations Assigned to Queue

Service Operation	Version
ADVANCED_SHIPPING_NOTICE	VERSION_1
ADVANCED_SHIPPING_NOTICE	VERSION_2
ADVANCED_SHIPPING_RECEIPT	VERSION_2
ADVANCED_SHIPPING_RECEIPT	VERSION_1

Define Partitioning Fields

Include	Field	Alias Name
☐	CUST_ID	
☐	CARRIER_ID	
☐	SHIP_TYPE_ID	
☐	PROCESS_INSTANCE	
☐	OPERATIONNAME	
☐	PUBLISHER	
☐	PUBPROC	

Save

Return

Add Field

Queue Definitions page

For the ADVANCED_SHIPPING_NOTICE queue, verify the Queue Status field has a value of Run.

Click the Return button to go back to the Service Operations component.

Activating the Handler

Access the Service Operations-Handlers page (PeopleTools, Integration Broker, Integration Setup, Service Operations, Handlers).

General Handlers Routings

Service Operation: ADVANCED_SHIPPING_NOTICE

Default Version: VERSION_2

Operation Type: Asynchronous - One Way

*Name	*Type	Sequence	*Implementation	*Status		
ROUTERSENDHDLR	OnRoute		Application Class	Active	Details	+ -

Save Return to Search

Service Operations-Handlers page

For the ADVANCED_SHIPPING_NOTICE service operation, click the Handlers tab of the Service Operations component. If you are using chunking, select the value of *Active* in the Status field for the OnRoute handler.

Activating the Routings

Access the Service Operations-Routings page (PeopleTools, Integration Broker, Integration Setup, Service Operations, Routings).

Service Operation: ADVANCED_SHIPPING_NOTICE
 Default Version: VERSION_2
 Routing Name:

Selected	Name	Version	Operation Type	Sender Node	Receiver Node	Direction	Status	Results
☐	ADVANCED SHIPPING NOTI EDI 856	VERSION_2	Asynch	OM910DVL	PSFT_XOUTBND	Outbound	Inactive	
☐	ADVANCED SHIPPING NOTICE	VERSION_2	Asynch	OM910DVL	PSFT_XOUTBND	Outbound	Inactive	
☐	ADVANCED SHIPPING NOTICE_CR	VERSION_1	Asynch	OM910DVL	PSFT_CR	Outbound	Inactive	
☐	ADVANCED SHIPPING NOTICE_V1	VERSION_1	Asynch	OM910DVL	PSFT_XOUTBND	Outbound	Inactive	

[Return to Search](#)

Service Operations-Routings page

For the ADVANCED_SHIPPING_NOTICE service operation, click the Routings tab of the Service Operations component. Activate an outbound routing definition for each receiver node and external alias name that data will be sent to. To activate a routing, select the check box next to the routing definition and click the Activate Selected Routings button. The following routing definitions are predefined:

- The ADVANCED_SHIPPING_NOTI_EDI_856 routing definition sends outbound shipping notices using the EDI X.12 856 format as a flat file. The data is converted from the PeopleSoft standard XML format to the EDI X.12 856 transaction format and then from XML to a flat file. If you wish to send the data as an XML file using the EDI X.12 856 format, then alter the routing definition to remove the second transform program.
- The ADVANCED_SHIPPING_NOTICE routing definition sends outbound shipping notices using the PeopleSoft standard XML format. This routing definition is used when you are sending data to a third-party system that is using the current version of the service operation.
- The ADVANCED_SHIPPING_NOTICE_CR routing definition sends outbound shipping notices using the PeopleSoft standard XML format to PeopleSoft CRM.
- The ADVANCED_SHIPPING_NOTICE_V1 routing definition sends outbound shipping notices using the PeopleSoft standard XML format and converts the data from the current service operation version (version 2) to an older version (version 1) of the service operation. This routing definition is used when you are sending data to a third-party system that is still using an older version of the service operation.

Note. You do not need to select a routing definition if the batch publish rule is set up to post to a flat file only.

Confirming the Parameters of the Routing Definition

Access the Routings-Parameters page (PeopleTools, Integration Broker, Integration Setup, Routings, Parameters).

Routing Definitions	Parameters	Connector Properties	Routing Properties
Routing Name: ADVANCED_SHIPPING_NOTI_ED1_856 Service Operation: ADVANCED_SHIPPING_NOTICE Service Operation Version: VERSION_2 Sender Node: OM910DVL Receiver Node: PSFT_XOUTBND			
Parameters			
Type: Outbound Request External Alias: EDI_TXN_856.VERSION_1 Alias References WS Security Message.Ver into Transform 1: ADVANCED_SHIPPING_NOTICE.VERSION_2 Transform Program 1: EDI_856_O Transform Program 2: XML_TO_FILE Message.Ver out of Transforms: EDI_TXN_856.VERSION_1			
Save Return			

Routings-Parameters page

On the Routings tab of the Service Operations component, select the link attached to the routing definition name. This link accesses the Routing Definitions component. Select the Parameters tab and complete the following steps:

1. Confirm the external alias name in the External Alias field for the routing is correct. When sending or receiving data, the Integration Broker determines which routing to use by referring to the external alias name, not the routing name.
2. Verify or change the transform programs on this routing definition. A routing definition defines the sending and receiving nodes for a transaction and specifies any inbound and outbound transformations to invoke. A transform program is a type of PeopleSoft Application Engine program that can convert data from one format to another; for example, from XML to a flat file. Use a transform program when one node sends a request or response message with a data structure different from the structure required by the other node. You must decide, based on your environment, to change, remove, or add transform programs. The ADVANCED_SHIPPING_NOTI_ED1_856 routing definition is delivered with two transform programs. The EDI_856_O transform program converts outbound shipping notices from the standard PeopleSoft XML format to the EDI X.12 856 transaction format (still in XML). The XML_TO_FILE transform program converts the EDI X.12 856 formatted data from XML to a flat file format. You can remove the XML_TO_FILE transform program to send your data in the XML EDI X.12 856 format. If you are not using EDI then you will want to use the ADVANCED_SHIPPING_NOTICE routing definition instead.

The transform program, to convert data from the current version of a service operation to an older version, is located on the Service Operation Version page of the non-default version. Select the non-default version on the Service Operations-General page to access the Service Operation Version page.

Verifying the Node is Active

Access the Node Definitions page (PeopleTools, Integration Broker, Integration Setup, Nodes, Node Definitions).

The screenshot displays the 'Node Definitions' page with the following fields and options:

- Node Name:** PSFT_SUPPLIER_NETWORK
- *Description:** Supplier Network
- *Node Type:** External (dropdown menu)
- *Authentication Option:** None (dropdown menu)
- *Default User ID:** VP1
- WSIL URL:** (empty text field)
- Hub Node:** (empty text field)
- Master Node:** (empty text field)
- Company ID:** (empty text field)
- IB Throttle Threshold:** (empty text field)
- Image Name:** (empty text field)
- Codeset Group Name:** (empty text field)
- External User ID:** (empty text field)
- External Password:** (empty text field)
- External Version:** (empty text field)

On the right side, there are three buttons: **Copy Node**, **Rename Node**, and **Delete Node**. Below these, there are four checkboxes: **Default Local Node** (unchecked), **Local Node** (unchecked), **Active Node** (checked), and **Non-Repudiation** (unchecked). Below these is a checkbox for **Segment Aware** (unchecked).

At the bottom, there are three links: **Save**, **Contact/Notes**, and **Properties**. A **Return to Search** button is located at the bottom left.

Node Definitions page

Verify the Active Node check box has been selected for any nodes used in the routings that you activated on the Service Operations-Routings page for ADVANCED_SHIPPING_NOTICE service operation.

Verifying the Node is Connected to the Network

Access the Nodes-Connectors page (PeopleTools, Integration Broker, Integration Setup, Nodes, Connectors).

Node DefinitionsConnectorsPortalWS SecurityRoutings

Node NamePSFT_SUPPLIER_NETWORKPing Node

Details

Gateway ID:LOCAL

Connector ID:HTTPTARGET

PropertiesCustomizeFind1 of 1FirstLast

PropertiesData Type / Description

	*Property ID	*Property Name	Required	Value		
1			☐		+	-

▼ Password Encryption Utility

PasswordConfirm Password

Encrypt

Encrypted Password

Save

Return to Search

Nodes-Connectors page

For an outbound service operation, verify the node or routing is connected to the correct network using the Gateway ID and Connector ID fields. Depending on the file output location, you may need a password. If a password is needed, you should use the password encryption utility on this page.

Note. Your database administrator will need to assist you with this setup.

Activate the Batch Publish Rule

Access the Batch Publish Rules page (Enterprise Components, Integration Definitions, Batch Publish Rules).

Batch Publish Rules page

For the ADVANCED_SHIPPING_NOTICE message name (service operation):

1. Select *ActiveStatus* to activate this publish rule definition.
2. Select the appropriate Output Format. The PeopleSoft Application Engine program can create either an Extensible Markup Language (XML) message that flows through PeopleSoft Integration Broker architecture or a flat file generated on the PeopleSoft Process Scheduler server and not published elsewhere. If you are sending data to a PeopleSoft system, select Message as your format.
3. If you want to use message chunking, configure a chunking rule and then enter it in the Chunking Rule ID field.

Setting Up Chunking for the Batch Publish Rule

Access the Customer ID Chunk page (SCM Integrations, Chunking Rule, CustID to Node Mapping).

CustID to Node Mapping

Chunking Rule ID: CUSTOMER_ID

Chunk by Setid and Customer ID

Effective Date

Find | View All | First | 1 of 1 | Last

*Effective Date: 01/01/1900

31

*Status: Active

Message Node

Find | View All | First | 1 of 1 | Last

*Node:

Customers

Customize | Find | View All | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | First | 1 of 1 | Last

*SetID	*Customer ID		

Customer ID Chunk page

If using chunking for the batch publish rule, set up the chunking rule mapping definitions. You can use a delivered chunking rule or create a new chunking rule.

If using the CUSTOMER_ID chunking rule ID, access the Customer ID Chunk page.

Select the node for each customer that receives electronic data.

Chunking is only needed if you have requirements to break up the outbound data and send them to different destinations based on attributes in the message such as business unit or customer ID. The most common use of chunking with the ASN message is to send a single customer's messages to a specific node setup for that trading partner. If you are using a middleware product to actually determine trading partner destinations then a single transaction with all trading partner transactions can usually be sent directly to the middleware product. You would not need to activate message chunking in this situation.

See Also

Chapter 3, "Implementing Integrations," Setting Up Chunking, page 75

Example: Processing the Advanced Shipping Notice EIP

This sections discusses processing the Advanced Shipping Notice EIP.

Copyright © 1992, 2009, Oracle and/or its affiliates. All Rights Reserved.

413

Pages Used to Process the Advanced Shipping Notice EIP

Page Name	Definition Name	Navigation	Usage
Publish Outbound Message	IN_RUN_PUB_MSG	SCM Integrations, Publish Outbound Message	Initiate the outbound message publish process for outbound SCM messages that use the batch publish design pattern.
Advanced Shipping Notices Selection Criteria	IN_RUN_SHPNTC_ASN	Select Advanced Shipping Notices on the Publish Outbound Message page to enable the Advanced Shipping Notices link. Click the Advanced Shipping Notices link to access the Advanced Shipping Notices Selection Criteria page.	Launch the Advanced Shipping Notices outbound transaction for sales orders that have been depleted.

Publishing Advanced Shipping Notices

Access the Publish Outbound Message page (SCM Integrations, Publish Outbound Message).

Publish Outbound Message

Run Control ID: Publish [Report Manager](#) [Process Monitor](#) **Run**

Language: English ▼

Inventory Messages ☐ Balance Notification ☒ Advanced Shipping Notices ☐ Interunit Expected Receipts ☐ Internal Location Exp Receipts ☐ Item Status Change ☐ TMS Order Release ☐ GTIN Data Notification ☐ VMI Interunit Expected Receipt	Purchasing Messages ☐ Request for Quotation ☐ Purchase Order Dispatch ☐ Return To Vendor ☐ PO Expected Receipts	Order Management Messages ☐ Sales Order Acknowledgement ☐ Sales Order Change Notice ☐ Sales Quote Notice ☐ Product Price List ☐ Sales Order/Quote Status
Manufacturing Messages ☐ Production Order Update ☐ Item Revision ☐ Replenish Request Dispatch		Billing Messages ☐ Billing Invoice Notice

Supplier Contract Management
☐ Supplier Contract Syndication

Publish Outbound Message page

Click the Advanced Shipping Notices check box, and click the Advanced Shipping Notices link to access the Advanced Shipping Notices Selection Criteria page.

Advanced Shipping Notices Selection Criteria

Run Control ID: Publish Report Manager Process Monitor **Run**

Language: English

Selection Criteria Find | View All First 1 of 1 Last

*Unit: *Request ID: 1 Description: + -

Selection Options	Selection Parameters
☒ All Shipments	Source Bus Unit:
☐ Sold To Customer	Sold To Customer:
☐ Ship To Customer	Ship To Customer:
☐ Specific Shipping ID	Shipping ID:
☐ Delivery ID	Delivery ID:

☐ Re-Generate Message

OK **Cancel**

Advanced Shipping Notices Selection Criteria page

- All Shipments** Select to generate this transaction for all sales order shipments that have been through the Depletion process (INPDDEPL), but have not previously generated an ASN.
- Sold To Customer** Select to generate this transaction for a sales order with a specific sold to customer.
- Ship To Customer** Select to generate this transaction for a sales order with a specific ship to customer.
- Specific Shipping ID** Select to generate this transaction for sales orders with a specific shipping ID.
- Source Bus Unit** Select a valid source business unit. A source business unit is the PeopleSoft Order Management business unit that created the sales order. This field is required if you elect in the Selection Options group box to generate this transaction for a specific sold to or ship to customer. This field is not available for entry if you elect in the Selection Options group box to generate this transaction for all shipments, or for a specific shipping ID.
- Sold To Customer** Select a valid sold to customer. This field is only available for entry and is required if you elect in the Selection Options group box to generate this transaction for a specific sold to customer.

Ship To Customer	Select a valid ship to customer. This field is only available for entry and is required if you elect in the Selection Options group box to generate this transaction for a specific ship to customer.
Shipping ID	Select a valid shipping ID. This field is only available for entry and is required if you elect in the Selection Options group box to generate this transaction for a specific shipping ID.
Re-Generate Message	Select this option to regenerate a message for data that have already been sent out.

Note. When you navigate to the process monitor and wait till the process completes successfully, you can click the Details link and then the View Log/Trace link. This shows the output file as a link. The system generates the flat file to reflect the ASN information for the corresponding shipping ID.

Data Separation

PeopleSoft Inventory creates a single occurrence of an ASN transaction for each combination of business unit, source business unit, sold to customer, ship to customer, shipping ID, carrier ID, and ship via. The transaction also lists the ASN creation date and time, the source business unit's address, the vehicle ID, the quantity ordered, the shipping weight, and, if defined, the shipping container ID and container type.

PeopleSoft sends the generated transaction to the ship to customer, the sold to customer, or both.

Example: Setting Up the Billing Invoice EIP

This section discusses the Billing Invoice EIP.

Understanding the Billing Invoice EIP

The Billing Invoice Notice EIP is an asynchronous outbound service operation to send invoices to your customers. The data from this service operation is passed to an external system. The Billing Invoice Notice EIP meets EDI requirements of the X.12 810 transaction set. The transaction is generated when you run the Finalize Bills process (BIIVC000); this populates the BI_HDR_EC table with the outbound invoice data. Once the data is in BI_HDR_EC, the outbound publish process can create the outbound message or flat file.

Before you can send invoices with the Billing Invoice EIP, you must:

Types of Setup	Steps
Complete application setup	Associate customers receiving Billing Invoice Notice EIP messages with a preferred communication value of <i>XML Only</i> or <i>XML and Print</i> , and a document code of <i>Invoice</i> . The system provides these values as a default to the Standard Billing - Address Info page when you create a bill for this customer.

Types of Setup	Steps
Complete Integration Broker setup	• Activate the BILLING_INVOICE_NOTICE service operation. • Verify the queue is in run mode. • Activate the handler. • Activate the routing. • Confirm the parameters of the routing definition. • Verify the node is active and connected to the correct network.
Complete Enterprise Component setup	• Activate the associated batch publish rule and specify the appropriate output for the message (an XML-based message or a flat file). If you are using message chunking, select a chunking rule ID. • If you are using message chunking, set up the chunking rule mapping definitions.

See Also

PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook, "Maintaining Contacts,"
Entering Contact Credit Card Information

Pages Used to Process Billing Invoices

Page Name	Definition Name	Navigation	Usage
Contact	CONTACT	Customers, Contact Information	Maintain information about each contact.
Contact Customer	CONTACT_CUST_PAGE	Click the Contact Customer Information link on the Contact page.	Build the relationship between the contact and the different customer IDs the contact serves or is associated with. If the contact is only associated with one customer, enter that customer on this page. If the contact is a broker, for example, use this page to establish the relationships with the multiple customers that the broker serves. Set up security options on the Self Service Security tab.

Page Name	Definition Name	Navigation	Usage
Contact Additional Info	CONTACT_ADDTL_INFO	Click the Additional Info link for a contact on the Contact Customer page.	Enter the preferred communication method for the selected document.
Service Operations-General	IB_SERVICE	PeopleTools, Integration Broker, Integration Setup, Service Operations, General	Define and activate a service operation.
Service Operations-Handlers	IB_SERVICEHDLR	PeopleTools, Integration Broker, Integration Setup, Service Operations, Handlers	Activate one or more service operation handlers.
Service Operations-Routings	IB_SERVICERTNGS	PeopleTools, Integration Broker, Integration Setup, Service Operations, Routings	Define and activate routing definitions on the service operation.
Routings-Parameters	IB_ROUTINGDEFNDOC	- PeopleTools, Integration Broker, Integration Setup, Service Operations, Routings. Select the link attached to the routing definition name, then select the Parameters tab. - PeopleTools, Integration Broker, Integration Setup, Routings, Parameters	Verify the external service alias name, nodes, and transform programs used by this routing.
Queue Definitions	IB_QUEUEDEFN	- PeopleTools, Integration Broker, Integration Setup, Service Operations, General. Select the View Queue link attached to this service operation. - PeopleTools, Integration Broker, Integration Setup, Queues	Activate the queue used by the service operation.
Node Definitions	IB_NODE	PeopleTools, Integration Broker, Integration Setup, Nodes, Node Definitions	Activate node used by the service operation.

Page Name	Definition Name	Navigation	Usage
Nodes-Connectors	IB_NODECONN	PeopleTools, Integration Broker, Integration Setup, Nodes, Connectors	For an outbound service operation, verify the node is connected to the correct network.
Batch Publish Rules	EO_MSGPUBATCH	Enterprise Components, Integration Definitions, Batch Publish Rules	Activate the batch publish rule for the publication messages you create. This rule includes instructions on message chunking, if necessary.
Customer ID Chunk	OM_CHUNKCUSTID	SCM Integrations, Chunking Rule, CustID to Node Mapping	Set up chunking for the batch publish rule.

Verifying Contacts

You must ensure that the customer you are interacting with has a contact set up to accept EDI transmissions, and that the contact is a ship to contact.

Access the Contact page (Customers, Contact Information) using the Customer ID in the *correct history* mode.

The screenshot displays the 'Contact' page in PeopleSoft. At the top, there is a 'Contact' tab. Below it, the 'SetID' is 'SHARE' and the 'Contact ID' is '10'. The main section is titled 'Contact Information' and includes a search bar with 'Find | View All | First | 1 of 1 | Last'. The contact details are as follows:

- *Effective Date:** 01/01/1990
- *Status:** Active
- *Name:** Jeffreys, Jenny
- *Contact Flag:** External
- Title:** Manager
- Email ID:** (empty field)
- Salutation Code:** MS
- *Preferred Communication:** E-mail & Print
- Language Code:** English
- Person ID:** (empty field)

At the bottom, there are four links: [Contact Customer Information](#), [Contact Phone and Type](#), [User Profile](#), and [Staffing Information](#).

Contact page

Access the Contact Customer page using the Contact Customer Information link on the Contact page.

Contact Customer

SetID: SHARE Contact ID: 10

Contact Information Find | View All | First 1 of 1 Last

Effective Date: 01/01/1990 Jeffreys,Jenny

Link Contact to Customer Customize | Find | View All | First 1-3 of 24 Last

Customer Self Service Security

*Customer SetID	*Customer ID	Customer Name	Location		Credit Card	Documentation	Primary Bill To	Primary Ship To	Primary Sold To		
SHARE	1000	Alliance Group	1	Main Office	Credit Card	Documentation	☒	☒	☒	+	-
SHARE	1001	Apex Systems	1	Corporate HQ	Credit Card	Documentation	☒	☒	☒	+	-
SHARE	1002	Easy Solutions	1	Oakland Office	Credit Card	Documentation	☒	☒	☒	+	-

[Contact Information](#) [Contact Phone and Type](#) [User Profile](#)

Contact Customer page

Click the Primary Bill To check box to receive the proper invoice notifications.

Click the Documentation link corresponding to the appropriate customer to access the Documentation page.

Documentation

SetID: SHARE Contact: 10 Jeffreys,Jenny Effective Date: 01/01/1990

Customer SetID: SHARE Customer: 1000 Alliance Group

Documentation Customize | Find | View All | First 1 of 1 Last

*Document Code	*Preferred Communication	Number of Copies		
INVC	XML & Print	1	+	-

Documentation page

Under the Documentation group box, make sure the Document Code is *INVC* (invoice), and Preferred Communication is *XML & Print* or *XML only*.

See Also

PeopleSoft Enterprise Order to Cash Common Information 9.1 PeopleBook, "Maintaining Contacts," Entering Contact Credit Card Information

Activating the Billing Invoice Notice Service Operation

Use the PeopleSoft Integration Broker to activate the Billing Invoice Notice service operation.

Access the Service Operations-General page (PeopleTools, Integration Broker, Integration Setup, Service Operations, General).

General Handlers Routings

Service Operation: BILLING_INVOICE_NOTICE

Operation Type: Asynchronous - One Way

***Operation Description:** Billing Invoice Notice

Operation Comments:

☐ User/Password Required

***Security Verification:** None

Object Owner ID: Billing

Operation Alias:

[Service Operation Security](#)

Default Service Operation Version

***Version:** VERSION_4

Version Description: Billing Invoice Notice

Version Comments:

☐ Non-Repudiation

☐ Runtime Schema Validation

[Introspection](#)

☒ Default ☐ Active

Routing Status

Any-to-Local: Does not exist

Local-to-Local: Does not exist

Local-to-Atom: Does not exist

Routing Actions Upon Save

☐ Generate Any-to-Local

☐ Generate Local-to-Local

Message Information

Type: Request

Message.Version: BILLING_INVOICE_NOTICE.VERSION_4 [View Message](#)

***Queue Name:** BILLING_INVOICE [View Queue](#) [Add New Queue](#)

Service Operations-General page (1 of 2)

Non-Default Versions [Customize](#) | [Find](#) | [First](#) | [1 of 1](#) | [Last](#)

Version	Description	Active
VERSION_3	Billing Invoice Notice	☐

[Save](#) [Return to Search](#) [Add Version](#)

[General](#) | [Handlers](#) | [Routings](#)

Service Operations-General page (2 of 2)

For the BILLING_INVOICE_NOTICE service operation, select the Active check box for the applicable service operation version. If the desired version is not the default version for the service operation, the default version must also be activated.

On the General tab of the Service Operations component, select the View Queue link at the bottom of the page to access the Queue Definitions page.

Service Operation Versions

The Default Service Operation Version group box displays the most current version of this service operation. If there have been changes to the PeopleSoft application that have required the service operation to change, for example new fields or tables, then the Non-Default Versions group box displays any older versions of the service operation based on the older release of the PeopleSoft application. The default version is always the current version, however you can use a non-default version to communicate with third-party systems that want to receive the data based on an old version. Select the link in the Non-Default Versions box to access the Service Operation Version page. This page contains information about the non-default version, including message and queue. In addition, the Logical Transforms group box contains transforms to convert the data to or from the default version. A transform program is a type of PeopleSoft Application Engine program that can convert data from one format to another. Based on your environment, you will review and possibly change these transforms.

See Also

Enterprise PeopleTools 8.50 PeopleBook: Integration Broker

Verifying the Queue is in Run Mode

Access the Queue Definitions page (PeopleTools, Integration Broker, Integration Setup, Service Operations, General. Select the Queue link attached to this service operation).

Queue Definitions

Queue Name:

BILLING_INVOICE

Description:

Billing Invoice Msg. Channel

Comments:

Billing Invoice Notice Message's
Message Channel for XML Messaging

☒ Archive

☐ Unordered

Queue Status:

Pause

Object Owner ID:

Billing

Operations Assigned to Queue

Service Operations

View All

First

1-2 of 2

Last

Service Operation	Version
BILLING_INVOICE_NOTICE	VERSION_4
BILLING_INVOICE_NOTICE	VERSION_3

Define Partitioning Fields

Common Fields

View All

First

1-10 of 51

Last

Include	Field	Alias Name
☐	SETID	
☐	CUST_ID	
☐	BUSINESS_UNIT	
☐	INVOICE	
☐	DOC_SEQ_NBR	
☐	FROM_DT	
☐	TO_DT	
☐	BILL_TO_CUST_ID	
☐	ADDRESS_SEQ_NUM	
☐	BILL_INQUIRY_PHONE	

Add Field

Save

Return

Queue Definitions page

For the BILLING_INVOICE queue, verify the Queue Status field has a value of *Run*.
Click the Return button to go back to the Service Operations component.

Activating the Handler

Access the Service Operations-Handlers page (PeopleTools, Integration Broker, Integration Setup, Service Operations, Handlers).

General Handlers **Routings**

Service Operation: BILLING_INVOICE_NOTICE
 Default Version: VERSION_4
 Operation Type: Asynchronous - One Way

Handlers					
*Name	*Type	Sequence	*Implementation	*Status	
ROUTERSENDHDLR	OnRoute		Application Class	Active	Details + -

Save Return to Search

Service Operations-Handlers page

For the BILLING_INVOICE_NOTICE service operation, click the Handlers tab of the Service Operations component. If you want to use chunking, select the value of *Active* in the Status field for the OnRoute handler.

Activating the Routings

Access the Service Operations-Routings page (PeopleTools, Integration Broker, Integration Setup, Service Operations, Routings).

General Handlers **Routings**

Service Operation: BILLING_INVOICE_NOTICE
 Default Version: VERSION_4
 Routing Name: Add

Routing Definitions							
Selected	Name	Version	Operation Type	Sender Node	Receiver Node	Direction	Status
☐	BILLING_INVOICE_NOTICE EDI 810	VERSION_4	Asynch	OM910DVL	PSFT_XOUTBND	Outbound	Inactive
☐	BILLING_INVOICE_NOTICE V3	VERSION_3	Asynch	OM910DVL	PSFT_XOUTBND	Outbound	Inactive
☐	BILLING_INVOICE_NOTICE V4	VERSION_4	Asynch	OM910DVL	PSFT_XOUTBND	Outbound	Inactive

Inactivate Selected Routings Activate Selected Routings

Save Return to Search

Service Operations-Routings page

For the BILLING_INVOICE_NOTICE service operation, click the Routings tab of the Service Operations component. Activate an outbound routing definition for each receiver node and external alias name that data will be sent to. To activate a routing, select the check box next to the routing definition and click the Activate Selected Routings button. The following routing definitions are predefined:

- The BILLING_INVOICE_NOTICE_ED1_810 routing definition sends outbound invoices using the EDI X.12 810 format as a flat file. The data is converted from the PeopleSoft standard XML format to the EDI X.12 810 transaction format (still in XML) and then from XML to a flat file. If you wish to send the data as an XML file using the EDI X.12 810 format, then alter the routing definition to remove the second transform program.
- The BILLING_INVOICE_NOTICE_V3 routing definition sends outbound invoices using the PeopleSoft standard XML format and converts the data from the current service operation version (version 4) to an older version (version 3) of the service operation. This routing definition is used when you are sending data to a third-party system that is still using an older version of the service operation.
- The BILLING_INVOICE_NOTICE_V4 routing definition sends outbound invoices using the PeopleSoft standard XML format. This routing definition is used when you are sending data to a third-party system that is using the current version of the service operation.

Note. You do not need to select a routing definition if the batch publish rule is set up to post to a flat file only.

Confirming the Parameters of the Routing Definition

Access the Routings-Parameters page (PeopleTools, Integration Broker, Integration Setup, Routings, Parameters).

Routing Definitions		Parameters	Connector Properties	Routing Properties
Routing Name:	BILLING_INVOICE_NOTICE_ED1_810			
Service Operation:	BILLING_INVOICE_NOTICE			
Service Operation Version:	VERSION_4			
Sender Node:	OM910DVL			
Receiver Node:	PSFT_XOUTBND			
Parameters				
Type:	Outbound Request			
External Alias:	EDI_TXN_810.VERSION_1			
	Alias References WS Security			
Message.Ver into Transform 1:	BILLING_INVOICE_NOTICE.VERSION_4			
Transform Program 1:	EDI_810_O			
Transform Program 2:	XML_TO_FILE			
Message.Ver out of Transforms:	EDI_TXN_810.VERSION_1			
Save Return				

Routings-Parameters page

On the Routings tab of the Service Operations component, select the link attached to the routing definition name. This link accesses the Routing Definitions component. Select the Parameters tab and complete the following steps:

1. Confirm the external alias name in the External Alias field for the routing is correct. When sending or receiving data, the Integration Broker determines which routing to use by referring to the external alias name, not the routing name.
2. Verify or change the transform programs on this routing definition. A routing definition defines the sending and receiving nodes for a transaction and specifies any inbound and outbound transformations to invoke. A transform program is a type of PeopleSoft Application Engine program that can convert data from one format to another; for example, from XML to a flat file. Use a transform program when one node sends a request or response message with a data structure different from the structure required by the other node. You must decide, based on your environment, to change, remove, or add transform programs. The BILLING_INVOICE_NOTICE_ED1_810 routing definition is delivered with two transform programs. The ED1_810_O transform program converts outbound invoice data from the standard PeopleSoft XML format to the EDI X.12 810 transaction format (still in XML). The XML_TO_FILE transform program converts the EDI X.12 810 formatted data from XML to a flat file format. You can remove the XML_TO_FILE transform program to send your data in the XML EDI X.12 810 format. If you are not using EDI then you will want to use the BILLING_INVOICE_NOTICE_V4 routing definition instead.

The transform program to convert data from the current version of a service operation to an older version is located on the Service Operation Version page of the non-default version. Select the non-default version on the Service Operations-General page to access the Service Operation Version page.

Verifying the Node is Active

Access the Node Definitions page (PeopleTools, Integration Broker, Integration Setup, Nodes, Node Definitions).

Node Definitions

Connectors

Portal

WS Security

Routings

Node Name:

CUST

Copy Node

*Description:

Portal Node - CUST

*Node Type:

PIA

☐ Default Local Node

☐ Local Node

☒ Active Node

☐ Non-Repudiation

☐ Segment Aware

*Authentication Option:

None

*Default User ID:

VP1

Hub Node:

Master Node:

Company ID:

IB Throttle Threshold:

Image Name:

Codeset Group Name:

Save

Contact/Notes

Properties

Node Definitions page

Verify the Active Node check box has been selected for any nodes used in the routings that you activated on the Service Operations-Routings page for BILLING_INVOICE_NOTICE service operation.

Verifying the Node is Connected to the Network

Access the Nodes-Connectors page (PeopleTools, Integration Broker, Integration Setup, Nodes, Connectors).

Node Definitions

Connectors

Portal

WS Security

Routings

Node Name

CUST

Main Content

Ping Node

Details

Gateway ID:

LOCAL

Connector ID:

PSFTTARGET

PeopleSoft Nodes are configured via the Gateway Setup Properties

This connector does not have properties. Use Gateways Page to setup.

Save

Return to Search

Nodes-Connectors page

For an outbound service operation, verify the node or routing is connected to the correct network using the Gateway ID and Connector ID fields. Depending on the file output location, you may need a password. If a password is needed, you should use the password encryption utility on this page.

Note. Your database administrator will need to assist you with this setup.

Activating the Batch Publish Rule

Access the Batch Publish Rules page (Enterprise Components, Integration Definitions, Batch Publish Rules).

Batch Publish RulesRecord MappingBatch Programs

Service Operation: BILLING_INVOICE_NOTICE

[Service Operation](#)

Operation Description: Billing Invoice Notice

Message.Version: BILLING_INVOICE_NOTICE.VERSION_4

Publish Rule Definition

Find | View All | First | 1 of 1 | Last

*Publish Rule ID: BILLING_INVOICE_NOTICE

*Description: BILLING INVOICE NOTICE MESSAGE

*Status: Inactive

Chunking Rule ID: BI_CUSTOMER_ID

Alternate Chunk Table: BIEC_CUSTID_EOV

Message Options

☐ Create Message Header

☐ Create Message Trailer

Output Format

☒ Message

☐ Flat File

☐ Flat File with Control Record

Billing Customer ID Chunking

BIEC Customer ID View

Batch Publish Rules page

For the BILLING_INVOICE_NOTICE message name (service operation):

1. Select *Active*Status to activate this publish rule definition for this message.
2. Select the appropriate Output Format.

The PeopleSoft Application Engine program can create either an Extensible Markup Language (XML) message that flows through PeopleSoft Integration Broker or a flat file generated on the PeopleSoft Process Scheduler server and not published elsewhere.

3. If you want to use message chunking, configure a chunking rule and then enter it in the Chunking Rule ID field.

Setting Up Chunking for the Batch Publish Rule

Access the Customer ID Chunk page (SCM Integrations, Chunking Rule, CustID to Node Mapping).

CustID to Node Mapping

Chunking Rule ID: BI_CUSTOMER_ID Billing Customer ID Chunking

Effective Date Find | View All | First | 1 of 1 | Last

*Effective Date: 01/01/1900 *Status: Active

Message Node Find | View All | First | 1 of 1 | Last

*Node: [Search Field]

Customers Customize | Find | View All | First | 1 of 1 | Last

*SetID	*Customer ID
[Search Field]	[Search Field]

Customer ID Chunk page

If using chunking for the batch publish rule, set up the chunking rule mapping definitions. You can use a delivered chunking rule or create a new chunking rule.

The BI_CUSTOMER_ID chunking rule ID is delivered as an optional chunking rule for the Billing Invoice Notice batch publish rule. To use this chunking rule, access the Customer ID Chunk page.

Select the node for each customer that receives electronic invoice notifications.

Chunking is only needed if you have requirements to break up the outbound data and send them to different destinations based on attributes in the message such as business unit or customer ID. For example, use chunking to send a single customer's messages to a specific node setup for that trading partner. If you are using a middleware product to actually determine trading partner destinations then a single transaction with all trading partner transactions can usually be sent directly to the middleware product. You would not need to activate message chunking in this situation.

See Also

[Chapter 3, "Implementing Integrations," Setting Up Chunking, page 75](#)

Publishing Billing Invoices

This section discusses how to publish billing invoices.

See Also

PeopleSoft Enterprise Billing 9.1 PeopleBook, "Processing EDI Transactions in PeopleSoft Billing"

Pages Used to Process the Billing Invoice EIP

Page Name	Definition Name	Navigation	Usage
Publish Outbound Message	IN_RUN_PUB_MSG	SCM Integrations, Publish Outbound Message	Initiate the outbound message publish process for outbound SCM messages that use the batch publish design pattern.
Billing Invoice Notice Message Selection Criteria	BI_INVMSG_SEL_PNL	Select Billing Invoice Notice on the Publish Outbound Message page to enable the Billing Invoice Notice link. Click the Billing Invoice Notice link to launch the Billing Invoice Notice Message Selection Criteria page.	Launch the Billing Invoice Notice outbound transaction.

Publishing Billing Invoices

Access the Publish Outbound Message page (SCM Integrations, Publish Outbound Message).

Publish Outbound Message

Run Control ID: Publish Report Manager Process Monitor Run

Language: English

Inventory Messages

- ☐ Balance Notification
- ☐ Advanced Shipping Notices
- ☐ Interunit Expected Receipts
- ☐ Internal Location Exp Receipts
- ☐ Item Status Change
- ☐ TMS Order Release
- ☐ GTIN Data Notification
- ☐ VMI Interunit Expected Receipt

Purchasing Messages

- ☐ Request for Quotation
- ☐ Purchase Order Dispatch
- ☐ Return To Vendor
- ☐ PO Expected Receipts

Manufacturing Messages

- ☐ Production Order Update
- ☐ Item Revision
- ☐ Replenish Request Dispatch

Order Management Messages

- ☐ Sales Order Acknowledgement
- ☐ Sales Order Change Notice
- ☐ Sales Quote Notice
- ☐ Product Price List
- ☐ Sales Order/Quote Status

Billing Messages

- ☒ [Billing Invoice Notice](#)

Supplier Contract Management

- ☐ Supplier Contract Syndication

Publish Outbound Message page

Select the Billing Invoice Notice check box, and click the Billing Invoice Notice link to access the Billing Invoice Notice Message Selection Criteria page.

Billing Invoice Notice Message Selection Criteria

Run Control ID: Publish Report Manager Process Monitor Run

Language: English

Billing Invoice Outbound Message Find | View All First 1 of 1 Last

Request ID:

Description:

Business Unit:

☐ Re-transmission

OK Cancel

Billing Invoice Notice Message Selection Criteria

Enter a Request ID, Description, and Business Unit.

Re-transmission

Select to indicate that you want to re-transmit selected invoices.

When the Publish Outbound Message process completes, it clears the BI_HDR_EC table. If you need to re-transmit invoices, the Re-transmission check box is available on this page. When you select this check box, additional selection fields appear on the page. The system rewrites the specified invoices to the BI_HDR_EC table, which is processed and transmitted again.

For technical details about individual EIPs, use the Interactive Services Repository (ISR) in the My Oracle Support website located at <https://support.oracle.com/CSP/ui/flash.html>.

See Also

PeopleSoft Enterprise Billing 9.1 PeopleBook, "Processing EDI Transactions in PeopleSoft Billing"

Appendix B

Helpful Hints for Integration With PeopleSoft Supply Chain Management

This appendix includes helpful hints, troubleshooting information, and frequently asked questions (FAQs) about integration with the PeopleSoft Supply Chain Management (SCM) applications.

Understanding This Appendix

This appendix provides answers to some common questions that arise when setting up and using PeopleSoft Enterprise Integration Points (EIPs).

Note. The information provided here should not be construed as consulting or implementation advice for your specific industry or your individual organization. The information here should be adapted or even disregarded based on the needs of your organization. PeopleSoft does not guarantee that the information included here will work as intended within your customized environment.

Helpful Hints About EIPs

The proper setup of your EIPs play a key role in any integration strategy. The following section is designed to answer common questions about EIP setup and processing.

Finding More Information About EIPs

Problem: Where can I find additional information about service operations, including more technical details?

Solution: Use the Interactive Services Repository (ISR) in the My Oracle Support website located at <https://support.oracle.com/CSP/ui/flash.html>.

The ISR contains information about the numerous EIPs. Developers use ISR to document the technical structure of an integration point, its design patterns, and underlying technology. Analysts will use ISR to explore and understand integration points from a business process context. This is especially useful when implementing an Oracle-supported reference business process across multiple products and release versions.

Monitoring the Transactions

Problem: How can I tell if my service operation transaction was completed successfully?

Solution: Use the Service Operations Monitor located in PeopleTools, Integration Broker, Service Operations Monitor. Use these pages to view items in the integration system at a high level so that you can isolate particular areas and then drill down for further information. You can select to group information by queue or service operation.

Services and Service Operations

Problem: What is the difference between a service and a service operation?

Solution: Services are used to logically group a set of service operations. For example, if you have a number of service operations that are related to customers, such as those pertaining to customer information, adding customers, updating customers, deleting customers, and so on, you can create a customer web service and then associate the related service operations with that service.

Warning! PeopleSoft delivers two services with PeopleSoft Integration Broker: IB_GENERIC and IB_UTILITY. These services are used internally by the system. Do not delete or modify these services.

OnRoute Handlers

Problem: Do we need OnRoute handlers when we set up an operation?

Solution: If you are using the chunking features of the Batch Publish utility for outbound integrations, you may want to use an OnRoute Handler to direct different chunks of data to different trading partners. If you are integrating to a single trading partner then you will probably not have a need for this Handler.

Routing Definitions

Problem: On the Routing Definition, do we need to specify a transform?

Solution: Most likely you will not need a transform unless you have done your own customizations. Integrations with a service operation version other than the default require a transform to or from the default version. Additionally, in a few of the integrations, transforms are used to convert the default service operation version to or from industry standard formats such as xcbl, cxml, or X.12 EDI.

Nodes

Problem: Do we need to set up a location for nodes other than the local node? If so, what should this address be?

Solution: If integrating to or from external sources, use the http target connector and enter the URL of the external source in the connector properties. If integrating to another PeopleSoft database, use the PeopleSoft target connector and configure the selected gateway to point to an application server running pub/sub services on the target database.

SimpleFileTargetConnector -vs- Flat Files

Problem: What is the difference between using the SimpleFileTargetConnector on the gateway or using the Batch Publish Rule's Output Format of "Flat File"?

Solution: When using the SimpleFileTargetConnector in integration broker the gateway creates a file in the directory assigned to the node. When using the Flat File option on the batch publish rule, a service operation instance is never published. Instead, the Batch Publish utility generates a flat file in the format designated by the File Layout Definition named the same as the message. The file is placed in the default directory on the process scheduler server running the Outbound File Publish program.

FTP Servers

Problem: Can I have the files written to a FTP server instead of a directory specified in the properties of the SimpleFileTargetConnector?

Solution: Yes, by configuring the FtpTargetConnector on the node definition instead of the SimpleFileTargetConnector.

Chunking

Problem: When do I need to use chunking?

Solution: Chunking is only needed if you have requirements to break messages up by trading partner. If you are using a middleware product to actually determine trading partner destinations, a single message with all trading partner transactions can usually be sent directly to the middleware product.

Helpful Hints about Integration Broker in PeopleTools 8.48 and Higher

In PeopleTools 8.48, the Integration Broker architecture was changed. This section provides the answers to some frequently asked questions about the changes.

Message Properties

Problem: Starting with PeopleTools 8.48, I cannot view or change properties on my messages in application designer. How do I change or activate messages and any associated PeopleCode?

Solution: In PeopleTools 8.48, messages are designed and maintained in PIA instead of the application designer. The status of integrations was moved from the message to the service operation, so you now have to activate the service operation instead of the message. PeopleCode events were also moved to the service operation and renamed to handlers.

Chunking

Problem: In prior versions I had to attach OnRoute PeopleCode to my message when enabling chunking. Do I use the same PeopleCode as a service operation handler?

Solution: The chunking PeopleCode from prior releases will no longer function starting with PeopleTools 8.48. Service operations intended to support chunking are now delivered with an inactive OnRoute handler. This allows a user to activate the chunking PeopleCode from PIA rather than having to create PeopleCode in the application designer.

Channels

Problem: Starting with PeopleTools 8.48, I cannot find Message Channels. What happened to them?

Solution: In PeopleTools 8.48, Message Channels were renamed to Queues.

Transactions

Problem: Starting with PeopleTools 8.48, I cannot find my transactions. Does this mean I no longer have to create or activate them?

Solution: In PeopleTools 8.48, Transactions were renamed to Service Operation Routings. Routings must still be activated to enable an integration.

Relationship Transactions

Problem: Starting with PeopleTools 8.48, I cannot find my Relationships or relationship transactions. How do I enable transforms?

Solution: In PeopleTools 8.48, transforms were moved to the routing definition, and non-default service operation versions. They are now enabled when the routing is activated. Relationships and relationship transactions have been deprecated.

Index

Numerics/Symbols

- 810
 - example 416
- 850
 - example 349, 382
- 855
 - example 365
- 856
 - example 398

A

- Add Nodes to ChunkRule page 76
- addresses, for sales and tax solutions 309
- Advanced Shipping Notice (856)
 - example 398
- AUTO_NUM_PNL 222
- Auto Numbering component 222
- Auto Numbering page 222

B

- Backbone Interlink process, running 99
- Backbone Interlinks, processing 98
- BackBone InterlinX
 - integrations 81
 - overview 79
 - prerequisites 80
 - setting up 79
- background transaction processes 161
- BankBone InterlinX - Process Request page 98, 99
- Bar Code Transaction Setup component (BCT_SETUP_FS) 78
- Batch Publish Rules page 75
- BBIX User Exit Processing page 80
- BCT_LABEL_FS 154
- BCT_MFGID_SETUP 155
- BCT_SETUP_FS component 78
- Billing Invoice (810)
 - example 416
- BU/Location Node Mapping page 77
- BU/Par Location Node Mapping page 77
- Build Demand History page
 - navigation 281
- business interlinks, Taxware Sales and Use Tax 341
- business interlinks, Vertex Q Series 327
- business process, order-to-cash 109
- BusUnit Mapping page 76

C

- calendars 267

- creating and maintaining 269
- demand weight 269
- extending 273
- forecast periods 272
- pattern code 269
- period codes 271
- period types 271
- start and end dates 271
- Calendar Weight Profiles page
 - navigation 269
 - page 273
- carrier and shipping method data, understanding 124
- Carrier page 222
- case carts 142
- Change Calendar Weights page 269
- changes, order 113
- chunking
 - setting up 75
- common elements xvi
- Completion Label - Completion Labels page 167
- Completion Label - Production Select page 167
- completion labels, printing 170
- Copy Import Specifications page 293
- Copy Internal Specifications page 287
- Copy Weight Profile page 269
- CRM EIPs
 - inbound 235
 - list 237
 - outbound 235
 - setting up 235
 - using 237
- customer data, understanding 124
- Customer ID Chunk page 77

D

- Daily Calendar Weights page 274
- data collection, understanding 157
- data collection labels
 - completion 170
 - item storage 175
 - kanban card 173
 - pull tickets 170
 - shipping carton 177
 - shipping container 180
 - shipping serial 179
 - storage container 176
 - storage location 175
- data collection labels, setting up 154
- Data Collection Label Setup component 154
- Data Collection Label Setup page 154
- Data Collection Setup page 78
- data collection system, record layouts for 183
- data collection transactions, using 159
- data definition maintenance, using 93
- Data Definition Maintenance page 91, 93
- defaults, electronic data collection 154
- Define Calendar Patterns page 268, 269
- Define Calendar Structure page

- navigation 268
- page 269
- Define Export Specifications page
 - navigation 287
- Define Field Mapping - Customer page 275
- Define Field Mappings - Base page 275
- Define Field Mappings - Sales page 275
- Define Import Specifications page
 - navigation 293
- Define Map page 85
- Define Map Sets page 85, 89
- Define Maps page 85, 317
- Define Node Associations page 85, 90
- Define Target Set page 80
- Define Target Sets page 81
- definitions, picking plan extract file record 205
- Delete Field Mappings page 275
- Delete Import Specifications page 293
- Demantra Demand Management integration 263

E

- EIP
 - implementing 69
 - setting up 69
- EIPs, overview 7
- electronic data collection, understanding 153
- electronic data collection defaults, setting up
 - 78, 154
- electronic data collection definitions, label extract
 - file formats 189
- electronic data collection system
 - designing 153
 - selecting devices 158
 - understanding 157
 - using 157
- Enterprise Components
 - setup for EIP 73
- enterprise integration points
 - documentation 3
 - documentation functional and technical
 - implementers 4
 - documentation power users and managers 4
- enterprise integration points (EIPs), understanding 105
- error correction, transportation management system 231
- errors, tax calculation 315
- Export data to SCBM page 256
- Export Demand page 287
- exporting data, supply chain business modeler 255
- extract file format
 - definitions 189
 - inventory picking 205
 - item storage labels 191
 - item usage labels 201
 - Kanban Card labels 202
 - manufacturing picking 210
 - production completion labels 200
 - pull ticket labels 202
 - shipping carton labels 193
 - shipping container labels 197
 - shipping serial labels 199
 - storage container labels 192
 - storage location labels 190, 192
- extract file record
 - definitions, picking plan 205

F

- fields, common descriptions xvi
- file formats
 - par location count 183
 - physical accounting 183
- File Inbound page 75
- files, managing 164
- forecast kit option 283, 289
- four-wall warehousing
 - understanding 120
 - WMS integration 120
- Full Data Publish Rules page 75

G

- geocodes 309
 - associating with customer address 309
 - billing interaction with third-party vendors 312
 - understanding 309

H

- helpful hints
 - integration to SCM 433

I

- Import data from SCBM page 260
- Import Forecast page 293
- importing data, supply chain business modeler 259
- inbound EIPs
 - architecture overview 7
 - overview 7
 - processing 91
- inbound transactions
 - data definition maintenance 93
 - purging 96
 - transaction maintenance 92
- Integrating with a Third-Party Point-of-Use
 - Supplier System, overview 129
- integration, system-wide-assumptions 104
- Integration Broker setup 69
- Integration Definition page 80, 81
- integration implementation 5
- integration information flow 3
- integration issues, warehouse management systems 103
- Integration with a third-party surgical resource
 - software application
 - overview 139
- Internal Location Expected Receipt EIP (outbound)
 - use in POU 135
- inventory adjustments, understanding 121
- inventory picking, extract file format 205
- inventory status updates, storage location transfers 121

- item data, understanding 124
- item replenishment
 - data for SRS 144
 - in POU 133
- items
 - defining for POU 130
 - defining for SRS integration 140
- Item Storage Label page 168
- item storage labels
 - extract file format 191
 - printing 175
- Item Usage Label page 169
- item usage labels, extract file format 201

K

- Kanban Card, selecting the label range 175
- Kanban Card labels
 - extract file format 202
 - printing 173
 - selecting the print range 175
- Kanban Card Range page 168

L

- label extract file, definitions 189
- labels
 - generating 163
 - setting up 154
- list of delivered SCM EIPs 12
- list of predefined XML documents for exporting
 - data 251
- list of predefined XML documents for importing
 - data 253
- load notification EIP 229
- load notification process 229
- location data, understanding 125

M

- Maintain Import Controls page 287
- manufacturer ID
 - specifying 156
 - UCC/EAN 155
- manufacturing, picking extract file format 210
- Map Business Unit page 77
- Map Detail page 85, 318
- maps
 - defining 85
- Map Set Detail page 88
- Map Set IDs page 77
- map sets
 - defining 88, 89

N

- node associations
 - defining 90
- Node Definitions page 74, 323, 336

Nodes-Connectors page 74

O

- order-to-cash business process, understanding
 - WMS integration 109
- order, changes 113
- order changes, understanding 113
- order entry, understanding 110
- order release, processing 112
- order release processing, understanding 112
- outbound EIPs
 - overview 10
 - overview architecture 10
- outbound EIPs, processing 97

P

- Par Location Count EIP (inbound), use in POU 135
- Par Location EIP (outbound), use in POU 135
- par location replenishment, file format 184
- par locations
 - defining for POU 130
 - defining for SRS integration 140
- PeopleSoft application fundamentals xv
- PeopleSoft CRM integration 235
 - common objects 235
 - EIPs 237
 - PeopleSoft Billing 237
 - PeopleSoft FieldService 237
 - PeopleSoft Order Capture 236
 - PeopleSoft Order Management 236
 - understanding 235
- PeopleSoft SCM integration documentation,
 - navigating 3
- PeopleSoft Supply Chain Management,
 - understanding integration with supply chain
 - business modeler 249
- PeopleSoft Supply Chain Management
 - Integrations PeopleBook, common elements
 - used in xvi
- period codes, calendar 271
- Periods page 269, 270
- period types, calendar 271
- physical accounting, file format 188
- physical inventory
 - stock quantity snapshot 122
 - understanding 122
- picking, setting up 156
- picking plan, extract file record definitions 205
- PO Chunk Shipto page 77
- point-of-use supplier system
 - understanding 129
- point-of-use supplier system (POU)
 - chunking, use to streamline 131
 - data flow between PeopleSoft and POU
 - supplier 135
 - EIPs, understanding 135
 - integration assumptions 130
 - Internal Location Expected Receipt EIP
 - (outbound) 135
 - item replenishment data, managing 133
 - items and par locations, defining 130

- Par Location Count EIP (inbound) 135
- par location data, defining 132
- Par Location EIP (outbound) 135
- restocking supplier 134
- RTVs, creating for supplier items 132
- subscription error management 136
- suppliers, tracking as par locations 131
- preface xv
- Print Kanban Card page 168
- processing
 - order release 112
 - purchase order expected receipts 117
 - reservation 111
 - shipping 114
- procure-to-pay
 - business process 115
 - understanding 115
- production completion labels, extract file format 200
- product kit 283, 289
- Publish Outbound Message page 97, 225
- Pull Ticket/Pull List Options page 167
- pull ticket labels, extract file format 202
- pull ticket labels, printing 170
- Purchase Order (850)
 - example 382
- purchase order expected receipts processing, understanding 117
- purchase orders, understanding 117
- purchasing receipt labels, printing 169
- Purchasing Receipt Labels page 167
- Purge page 92, 96
- putaway, setting up 156

Q

- Queue Definitions page 74, 322
- Quick Map page 77

R

- receiving, understanding 119
- record layouts for electronic data collection system, overview 183
- requisitions, understanding 116
- reservation processing 111
- Review Demand History Inquiry page
 - navigation 281
- Review Demand History search page
 - navigation 281
- Review Imported Forecasts page 296
 - navigation 296
- Routings-Parameters page 74

S

- Sales Order (850)
 - example 349
- Sales Order Acknowledgement (855)
 - example 365
- scenarios
 - EIPs 347

- sending TMS data from PeopleSoft Inventory to TMS 225
- service operations
 - setting up 69
- Service Operations-General page 74
- Service Operations-Handler page 74
- Service Operations-Routings page 74
- SetId Mapping page 77
- setting up
 - labels 154
 - picking 156
 - putaway 156
 - unit of measure 156
 - wedge command code 156
- Setup Fulfillment-Transportation Interface page 222
- Setup Vendor to Node page 77
- shipment, within a TMS 220
- shipping, processing 114
- Shipping Carton Label page 168
- shipping carton labels
 - extract file format 193
 - printing 177
- shipping container labels
 - extract file format 197
 - printing 180
- Shipping Container page 169
- shipping processing, understanding 114
- Shipping Serial Label page 169
- shipping serial labels
 - extract file format 199
 - printing 179
- Source Code Chunk page 78
- SRS *See Also* See surgical resource software (SRS)
- static information update, understanding 123
- stock quantity snapshot, physical inventory 122
- Storage Container Label page 168
- storage container labels
 - extract file format 192
 - printing 176
- Storage Location Label page 168
- storage location labels
 - extract file format 190, 192
 - parameters 175
- storage location transfers, inventory status updates 121
- supply chain business modeler
 - exporting data 255
 - importing data 259
 - integrating with 249
 - understanding integration with PeopleSoft Supply Chain Management 249
- supply chain management enterprise integration
 - points
 - overview 7
- supply chain management integration, getting started 3
- surgical resource software (SRS)
 - chunking 140
 - data flow between PeopleSoft and SRS 146
 - EIP error management 148
 - EIPs, understanding 146
 - implementing integration 141
 - integration assumptions 139
 - item replenishment data for 144
 - items and par locations for, defining 140
 - par location data, defining 141
 - restocking a par location 145
 - RTVs for par location items 141

- stocking case carts from par location 142
- understanding 139
- system-wide assumptions, warehouse management systems integration 104

T

- target sets
 - setting up 81
- taxes
 - associating addresses with geocodes 309
 - calculating sales and use 303
 - comparing PeopleSoft tax tables to third-party vendors 303
 - identifying vendor dlls and shared library locations 343
 - identifying vendor plug-in locations 342
 - identifying Vertex dlls and shared library locations 329
 - identifying Vertex plug-in locations 328
 - installing Taxware 341
 - installing Vertex 327
 - interacting with third-party vendors during geocode lookup 312
 - interacting with third-party vendors during invoicing 314
 - interacting with third-party vendors during online tax calculations 312
 - interacting with third-party vendors during the Order Completion process 314
 - reviewing third-party liability reporting 316
 - setting up Taxware on a UNIX platform 344
 - setting up Taxware on a Windows NT/2000 platform 344
 - setting up third-party vendors 306
 - setting up variables for the Taxware database locations 343
 - setting up variables for the Vertex database locations 329
 - setting up Vertex on UNIX platform 331
 - setting up Vertex on Windows NT/2000 platform 330
 - troubleshooting installation errors 332
 - troubleshooting Taxware installation errors 345
 - understanding address information 309
 - understanding Canadian tax support 316
 - understanding geocodes 309
 - understanding product groups 307
 - understanding third-party interfacing 310
 - viewing errors in PeopleSoft Billing 315
 - viewing errors when calculating taxes online 315
 - viewing errors when calculating taxes through invoicing 315
- Tax Geocode Selection page 309
- Taxware
 - addresses 309
 - calculation errors 315
 - differences for U.S. and Canada 316
 - interaction with billing during geocode lookup 312
 - interaction with billing during invoicing 314
 - interaction with billing during online tax calculations 312
 - setting up on a UNIX platform 344
 - setting up on a windows NT/2000 platform 344
 - troubleshooting installation errors 332, 345
- third-party tax applications
 - identifying vendor dlls and shared library locations 343
 - identifying vendor plug-in locations 342
 - identifying Vertex dlls and shared library locations 329
 - identifying Vertex plug-in locations 328
 - installing Taxware 341
 - installing Vertex 327
 - setting up variables for the Taxware database locations 343
 - setting up variables for the Vertex database locations 329
 - understanding business interlinks 327, 341
- third-party tax solutions
 - setting up 306
 - understanding tax interfacing 310
- Ticket/Pull List Range page 168
- TMS Load Notification page 230
- TMS order release EIP 223
- TMS order release process 223
- TMS Order Release Selection Criteria page 225
- trading days 273
- transaction maintenance, using 92
- Transaction Maintenance page 91, 92, 230
- transactions, purging 163
- Transportation Management page 230
- transportation management system 219
 - error correction 231
 - integrating with PeopleSoft Inventory 219
 - load notification EIP 229
 - order changes 227
 - processing 228
 - setting up 222
 - shipment definition 220
 - TMS order release EIP 223
- troubleshooting
 - tax calculation errors in Billing 315
 - Taxware 345
 - Vertex 332

U

- UCC/EAN Manufacturer component 155
- UCC/EAN manufacturer ID
 - setting up 155
- UCC/EAN manufacturer ID page 155
- UCC/EAN Manufacturer ID page 156
- unit of measure, setting up 156
- uploading TMS data from the TMS to PeopleSoft Inventory 230

V

- vendor data, understanding 124
- Vertex
 - addresses 309
 - calculation errors 315
 - differences for U.S. and Canada 316
 - interaction with billing during geocode lookup 312

- interaction with billing during invoicing 314
- interaction with billing during online tax calculations 312
- setting up on a UNIX platform 331
- setting up on a Windows NT/2000 platform 330
- troubleshooting installation errors 332

W

- warehouse management systems (WMS)
 - enterprise integration points 105
 - general integration issues 103
 - overview 103
- wedge command code, setting up 156
- weight profiles, calendar 267
- WMS
 - See Also* See warehouse management systems (WMS)
- WMS integration
 - procure-to-pay 115
 - static information updates 123
 - system-wide assumptions 104

X

- XML Mapper
 - implementing 84
 - overview 84
 - prerequisites 85