

Oracle® Application Express

SQL Workshop and Utilities Guide

Release 3.2

E12511-01

July 2009

Oracle Application Express SQL Workshop and Utilities Guide, Release 3.2

E12511-01

Copyright © 2003, 2009, Oracle and/or its affiliates. All rights reserved.

Primary Author: Drue Baker

Contributors: Marco Adelfio, Drue Baker, Carl Backstrom, Christina Cho, Steve Fogel, Michael Hichwa, Christopher Jones, Joel Kallman, Sharon Kennedy, Syme Kutz, Sergio Leunissen, Anne Romano, Kris Rice, Marc Sewtz, Scott Spadafore, Scott Spendolini, Jason Straub, Simon Watt, and Terri Jennings

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this software or related documentation is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation shall be subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License (December 2007). Oracle USA, Inc., 500 Oracle Parkway, Redwood City, CA 94065.

This software is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications which may create a risk of personal injury. If you use this software in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure the safe use of this software. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software in dangerous applications.

Oracle is a registered trademark of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

This software and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

Contents

Preface	ix
Topic Overview	ix
Audience	ix
Documentation Accessibility	x
Related Documents	x
Conventions	xi
1 Managing Database Objects with Object Browser	
About Object Browser	1-1
Accessing Object Browser	1-2
Searching For and Browsing Database Objects	1-3
Searching For and Selecting Database Objects	1-3
Hiding the Object Selection Pane.....	1-4
Using the Find Tables Icon	1-4
About Creating Database Objects	1-5
Managing Tables	1-5
Creating a Table.....	1-6
Browsing a Table.....	1-8
Editing a Table.....	1-9
Dropping a Table.....	1-10
Managing Views	1-10
Creating a View	1-11
Browsing a View	1-11
Editing a View	1-12
Compiling a View	1-13
Dropping a View	1-13
Managing Indexes	1-13
Creating an Index	1-13
Browsing an Index	1-14
Dropping an Index.....	1-14
Managing Sequences	1-15
Creating a Sequence.....	1-15
Browsing a Sequence	1-15
Dropping a Sequence.....	1-16
Managing Types	1-16

Creating a Type	1-16
Browsing a Type.....	1-17
Dropping a Type	1-17
Managing Packages.....	1-17
Creating a Package.....	1-18
Viewing a Package	1-18
Editing a Package	1-19
Compiling a Package	1-20
Downloading a Package.....	1-20
Dropping a Package.....	1-20
Managing Procedures	1-21
Creating a Procedure	1-21
Browsing a Procedure	1-22
Editing a Procedure	1-22
Compiling a Procedure	1-23
Downloading a Procedure.....	1-23
Dropping a Procedure	1-23
Managing Functions	1-23
Creating a Function.....	1-24
Browsing a Function	1-24
Editing a Function.....	1-25
Compiling a Function.....	1-25
Downloading a Function.....	1-26
Dropping a Function.....	1-26
Managing Triggers	1-26
Creating Triggers	1-27
Browsing a Trigger.....	1-27
Editing a Trigger	1-27
Compiling a Trigger.....	1-28
Downloading a Trigger	1-28
Dropping a Trigger	1-28
Managing Database Links.....	1-29
Creating a Database Link.....	1-29
Browsing a Database Link	1-29
Dropping a Database Link.....	1-30
Managing Materialized Views.....	1-30
Creating a Materialized View.....	1-30
Browsing a Materialized View	1-31
Dropping a Materialized View.....	1-32
Managing Synonyms	1-32
Creating Synonyms.....	1-32
Viewing a Synonym.....	1-33
Dropping a Synonym	1-33

2 Using SQL Scripts

What is SQL Scripts?	2-1
Accessing SQL Scripts.....	2-1

About the SQL Scripts Page.....	2-2
Creating a SQL Script	2-4
Creating a SQL Script in the Script Editor.....	2-4
Uploading a SQL Script.....	2-4
Using the Script Editor	2-5
Editing an Existing Script.....	2-5
Searching and Replacing Text or Regular Expressions	2-6
Summary of Script Editor Controls	2-7
Deleting a SQL Script	2-7
Deleting Scripts from the SQL Scripts Page	2-7
Deleting a Script in the Script Editor.....	2-8
Copying a SQL Script	2-8
Executing a SQL Script	2-8
Executing a SQL Script in the Script Editor.....	2-8
Executing a SQL Script from the SQL Scripts Page.....	2-9
About the Run Script Page.....	2-9
Viewing SQL Script Results	2-10
Viewing Results from the SQL Scripts Page	2-10
About the Results Page	2-11
Exporting and Importing SQL Scripts	2-12
Copying Scripts to an Export Script	2-12
Importing Scripts from an Export Script	2-14
Viewing Script and Result Quotas	2-15

3 Using SQL Commands

What is SQL Commands?	3-1
Accessing SQL Commands	3-2
About the SQL Commands Home Page	3-2
Using the Command Editor	3-4
Running a SQL Command.....	3-5
About Transactions in SQL Commands	3-5
About Unsupported SQL*Plus Commands	3-5
About Command Termination.....	3-6
Using Bind Variables	3-6
Saving a SQL Command	3-6
Copying a Command	3-6
Using Saved Commands	3-7
Accessing Saved Commands.....	3-7
About the Saved SQL Pane.....	3-7
Using SQL Command History	3-8
Accessing a Command from Command History	3-8
About the History Pane.....	3-8
Viewing Results	3-9
Accessing the Results Pane	3-9
About the Results Pane	3-10
Using Explain Plan	3-10
Viewing an Explain Plan.....	3-11

About Explain Plan Pane	3-11
-------------------------------	------

4 Using Oracle Application Express Utilities

About Importing, Exporting, Loading, and Unloading Data	4-1
Choosing the Right Import/Export/Load/Unload Option	4-2
Loading and Unloading Data from the Database	4-3
Accessing the Data Load/Unload Page.....	4-4
Loading Data	4-4
Unloading Data	4-5
Using Text Data Load Repository.....	4-6
Generating DDL	4-6
Viewing Object Reports	4-7
Table Reports	4-7
Security Reports	4-8
PL/SQL Reports	4-8
Exception Reports	4-10
All Object Reports	4-10
Using the Recycle Bin to View and Restore Dropped Objects	4-11
Managing Objects in the Recycle Bin	4-11
Emptying the Recycle Bin Without Viewing the Objects.....	4-12
Reviewing Application Express Views	4-12
Comparing Schemas	4-12
Monitoring the Database	4-13
Sessions	4-13
About System Statistics	4-15
About Top SQL.....	4-16
About Long Operations.....	4-16
Viewing Database Details	4-17

5 Building Queries with Query Builder

About Query Builder	5-1
Accessing Query Builder	5-2
Understanding the Query Building Process	5-3
Using the Object Selection Pane	5-3
Searching and Filtering Objects	5-3
Hiding the Object Selection Pane.....	5-4
Selecting Objects	5-4
About Supported Column Types.....	5-4
Adding an Object to the Design Pane	5-5
Removing or Hiding Objects in the Design Pane.....	5-6
Specifying Query Conditions	5-6
Creating Relationships Between Objects	5-8
About Join Conditions.....	5-8
Joining Objects Manually	5-8
Joining Objects Automatically.....	5-9
Working with Saved Queries	5-10
Saving a Query	5-10

Editing a Saved Query.....	5-11
Deleting a Saved Query.....	5-11
Viewing Generated SQL	5-11
Viewing Query Results	5-11

Index

Preface

Oracle Application Express SQL Workshop and Utilities Guide describes how to use Oracle Application Express SQL Workshop and utilities to load and unload data from an Oracle database, generate DDL, view object reports, and restore dropped database objects.

This preface contains these topics:

- [Topic Overview](#)
- [Audience](#)
- [Documentation Accessibility](#)
- [Related Documents](#)
- [Conventions](#)

Topic Overview

This document contains the following chapters:

Title	Description
Managing Database Objects with Object Browser	Explains how Object Browser enables developers to browse, create, and edit objects in a database.
Using SQL Scripts	Describes how to use SQL Scripts to create, edit, view, run and delete script files.
Using SQL Commands	Provides information on how to use SQL Commands to create, edit, view, run, and delete SQL commands.
Using Oracle Application Express Utilities	Describes how to use Oracle Application Express utilities to load and unload data from an Oracle database, generate DDL, view object reports and restore dropped database objects.
Building Queries with Query Builder	Explains how Query Builder's graphical user interface enables database developers to build queries without the need for manual SQL coding.

Audience

Oracle Application Express SQL Workshop and Utilities Guide is intended for application developers who are building database-centric Web applications using Oracle Application Express. The guide describes how to use Oracle Application Express SQL

Workshop and utilities to load and unload data from an Oracle database, generate DDL, view object reports, and restore dropped database objects.

To use this guide, you must have a general understanding of relational database concepts and the operating system environment under which Oracle Application Express is running.

See Also: *Oracle Database 2 Day + Application Express Developer's Guide*

Documentation Accessibility

Our goal is to make Oracle products, services, and supporting documentation accessible to all users, including users that are disabled. To that end, our documentation includes features that make information available to users of assistive technology. This documentation is available in HTML format, and contains markup to facilitate access by the disabled community. Accessibility standards will continue to evolve over time, and Oracle is actively engaged with other market-leading technology vendors to address technical obstacles so that our documentation can be accessible to all of our customers. For more information, visit the Oracle Accessibility Program Web site at <http://www.oracle.com/accessibility/>.

Accessibility of Code Examples in Documentation

Screen readers may not always correctly read the code examples in this document. The conventions for writing code require that closing braces should appear on an otherwise empty line; however, some screen readers may not always read a line of text that consists solely of a bracket or brace.

Accessibility of Links to External Web Sites in Documentation

This documentation may contain links to Web sites of other companies or organizations that Oracle does not own or control. Oracle neither evaluates nor makes any representations regarding the accessibility of these Web sites.

Deaf/Hard of Hearing Access to Oracle Support Services

To reach Oracle Support Services, use a telecommunications relay service (TRS) to call Oracle Support at 1.800.223.1711. An Oracle Support Services engineer will handle technical issues and provide customer support according to the Oracle service request process. Information about TRS is available at <http://www.fcc.gov/cgb/consumerfacts/trs.html>, and a list of phone numbers is available at <http://www.fcc.gov/cgb/dro/trsphonebk.html>.

Related Documents

For more information, see these Oracle resources:

- *Oracle Application Express Release Notes*
- *Oracle Application Express Installation Guide*
- *Oracle Database 2 Day + Application Express Developer's Guide*
- *Oracle Application Express Advanced Tutorials*
- *Oracle Application Express API Reference*
- *Oracle Application Express Administration Guide*
- *Oracle Application Express Migration Guide*

- *Oracle Database Concepts*
- *Oracle Database Advanced Application Developer's Guide*
- *Oracle Database Administrator's Guide*
- *Oracle Database SQL Language Reference*
- *SQL*Plus User's Guide and Reference*

For additional documentation available on Oracle's Technology Network, visit the Oracle Application Express Web site located at

http://www.oracle.com/technology/products/database/application_express/

For additional application examples, visit the Oracle by Examples (OBEs) Application Express page, located on Oracle's Technology Network. The OBEs provide step-by-step examples with screenshots on how to perform various tasks within Application Express.

http://www.oracle.com/technology/products/database/application_express/html/obes.html

For information about Oracle error messages, see *Oracle Database Error Messages*. Oracle error message documentation is available only in HTML. If you have access to the Oracle Database Documentation Library, you can browse the error messages by range. Once you find the specific range, use your browser's "find in page" feature to locate the specific message. When connected to the Internet, you can search for a specific error message using the error message search feature of the Oracle online documentation.

Many books in the documentation set use the sample schemas of the seed database, which is installed by default when you install Oracle. Refer to *Oracle Database Sample Schemas* for information on how these schemas were created and how you can use them yourself

Printed documentation is available for sale in the Oracle Store at

<http://oraclestore.oracle.com/>

To download free release notes, installation documentation, white papers, or other collateral, visit the Oracle Technology Network (OTN). You must register online before using OTN; registration is free and can be done at

<http://www.oracle.com/technology/membership/>

If you have a user name and password for OTN, then you can go directly to the documentation section of the OTN Web site at

<http://www.oracle.com/technology/documentation/>

Conventions

The following text conventions are used in this document:

Convention	Meaning
boldface	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
monospace	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

Managing Database Objects with Object Browser

Object Browser enables developers to browse, create, and edit objects in a database.

This section contains the following topics:


- [About Object Browser](#)
- [Searching For and Browsing Database Objects](#)
- [About Creating Database Objects](#)
- [Managing Tables](#)
- [Managing Views](#)
- [Managing Indexes](#)
- [Managing Sequences](#)
- [Managing Types](#)
- [Managing Packages](#)
- [Managing Procedures](#)
- [Managing Functions](#)
- [Managing Triggers](#)
- [Managing Database Links](#)
- [Managing Materialized Views](#)
- [Managing Synonyms](#)

See Also: *Oracle Database SQL Language Reference*

About Object Browser

The Object Browser page is divided into two sections:

- **Object Selection pane** displays on the left side of the Object Browser page and lists database objects of a selected type within the current schema. You can further narrow the results by filtering on the object name.
- **Detail pane** displays to the right of the page and displays detailed information about the selected object. To view object details, select an object in the Object Selection pane. Click the tabs at the top of the Detail pane to view additional details about the current object. To edit an object, click the appropriate button.

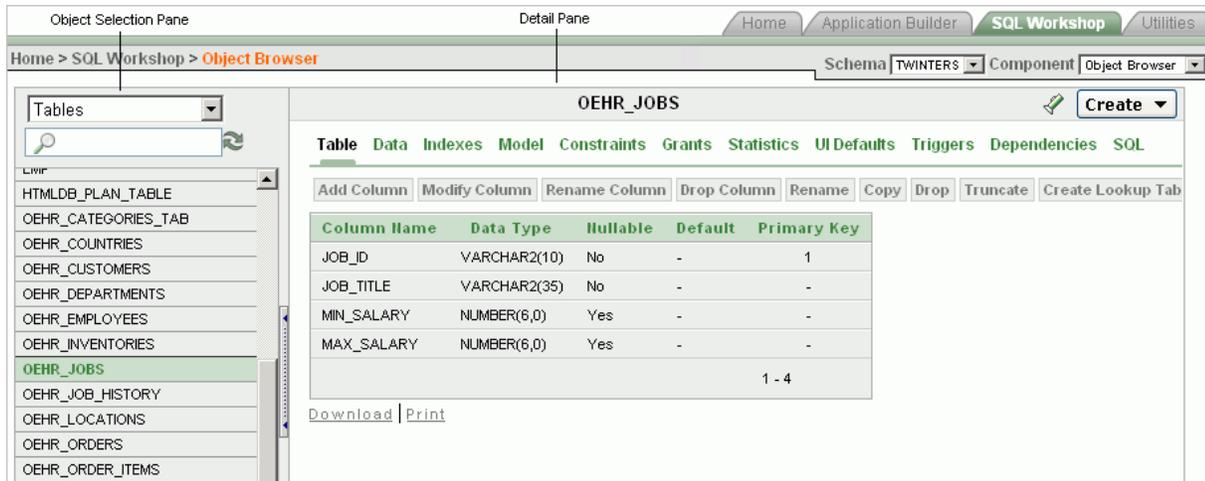

Selecting a Schema

A schema is a logical container for database objects. To access objects in another schema, make a selection from the Schema list in the upper right side of the page.

Switching to Another SQL Workshop Component

You can navigate to another SQL Workshop component by selecting from the Component list located on the upper right side of the page:

- **Object Browser.** See "[Managing Database Objects with Object Browser](#)" on page 1-1.
- **SQL Commands.** See "[Using SQL Commands](#)" on page 3-1.
- **SQL Scripts.** See "[Using SQL Scripts](#)" on page 2-1.
- **Query Builder.** See "[Building Queries with Query Builder](#)" on page 5-1.

Accessing Object Browser

To access Object Browser:

1. Log in to the Workspace home page.
2. Click **SQL Workshop**.
3. To view Object Browser you can either:
 - Click **SQL Workshop** and then **Object Browser** to drill-down to the Object Browser.
 - Click the down arrow on the right side of the SQL Workshop icon to view a drop down menu. Then select the **Object Browser** menu option.



Note: For the purposes of consistency, this document uses the primary navigation path (or drill-down approach) when explaining navigation.

Searching For and Browsing Database Objects

The Object Selection pane displays on the left side of the Object Browser page and lists database objects by type with the current schema. You can filter the view by selecting an object type or entering a case insensitive search term.

Topics in this section include:


- [Searching For and Selecting Database Objects](#)
- [Hiding the Object Selection Pane](#)
- [Using the Find Tables Icon](#)

Searching For and Selecting Database Objects

To search for a database object in the Object Selection pane:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. Select an object type from the Object list.

The list of objects that appears depends upon the available objects in the current schema. Note that any object having a red bar adjacent to it is invalid.

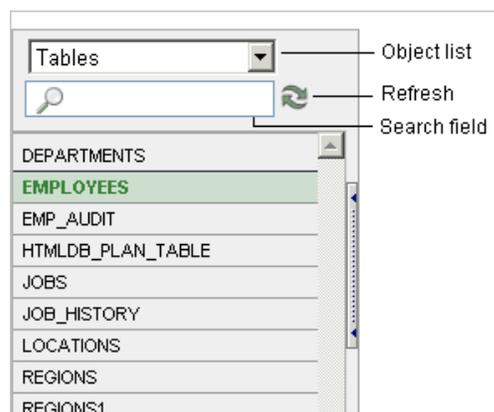


3. To search for an object name, enter a case insensitive search term in the Search field.
4. To view all objects, leave the search field blank.

Once you locate the database object you want to view, simply select it. The selected object displays in the Detail pane. If no object is selected, the Detail pane is blank.

Hiding the Object Selection Pane

You can hide the Object Selection pane by selecting the **Hide Objects** control. This control displays on the right side of the Object Selection pane. If the Object Selection pane appears, selecting this control hides it. Similarly, if the Object Selection pane is hidden, selecting this control causes the pane to reappear.

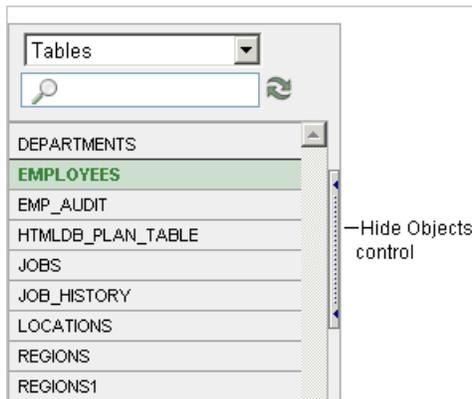

Using the Find Tables Icon

The Find Tables icon resembles a flashlight. Click this icon to view tables within the currently selected schema.



To view tables within the current schema:

1. Navigate to either Object Browser or SQL Commands.
2. From the Schema list, select a schema (optional).
3. Click the **Find Tables** icon.

The Table Finder appears. A search bar displaying the selected schema displays at the top of the page and contains the following controls:

- **Search.** Search for a table name. Enter case insensitive keywords in the Search field and click **Go**. To view all tables, leave the Search field blank and click **Go**.
- **Rows.** Determine how many rows display in the resulting report. To change the number of rows that display, make a selection from the list and click **Go**.
- **Views.** Select the **Views** check box and click **Go** to include views in the resulting report.

The Table Finder report appears displaying the table name, the number of rows, last analyzed date, and the object type.

4. Select a table name.

Search Views Schema: TWINTERS Rows 15 [Help](#)

Table Name	Rows	Last Analyzed	Type
OEHR_ORDERS_VIEW	-	-	VIEW
OEHR_ORDER_ITEMS	665	26-JAN-07	TABLE
OEHR_PRODUCTS	-	-	VIEW
OEHR_PRODUCT_DESCRIPTIONS	288	26-JAN-07	TABLE
OEHR_PRODUCT_INFORMATION	288	26-JAN-07	TABLE
OEHR_PRODUCT_PRICES	-	-	VIEW
OEHR_PROD_REF_LIST_NTAB	288	26-JAN-07	TABLE
OEHR_PROMOTIONS	2	26-JAN-07	TABLE
OEHR_REGIONS	4	26-JAN-07	TABLE
OEHR_SUBCAT_REF_LIST_NTAB	21	26-JAN-07	TABLE
OEHR_SYDNEY_INVENTORY	-	-	VIEW
OEHR_TORONTO_INVENTORY	-	-	VIEW
OEHR_WAREHOUSES	9	26-JAN-07	TABLE

31 - 43

Table: OEHR_PRODUCT_PRICES

Column	Data Type	Length	Precision	Scale	Nullable
CATEGORY_ID	NUMBER	22	2	0	Yes
#_OF_PRODUCTS	NUMBER	22	-	-	Yes
LOW_PRICE	NUMBER	22	-	-	Yes
HIGH_PRICE	NUMBER	22	-	-	Yes
					1 - 4

```
select
  CATEGORY_ID,
  #_OF_PRODUCTS,
  LOW_PRICE,
  HIGH_PRICE
from OEHR_PRODUCT_PRICES
```

A table definition appears on the right side of the page.

This report displays the column names, data type, length, precision, scale and the SQL necessary to re-create the table that appears at the bottom of the page.

About Creating Database Objects

You can create database objects using the Create Database Object Wizard. Once you select an object, a set of tabs and buttons appears at the top of the Detail pane. Use the tabs to view different aspects of the current items (for example, a tables indexes). Use the buttons to modify the current object.

To create an object:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. Click **Create**, located in the upper right corner of the Detail pane.
3. From the list of object types, select the type of object you want to create.
4. Follow the on-screen instructions.

Managing Tables

A table is a unit of data storage in an Oracle database, containing rows and columns. When you view a table in Object Browser, a table description appears that describes each column in the table.

Topics in this section include:

- [Creating a Table](#)
- [Browsing a Table](#)
- [Editing a Table](#)
- [Dropping a Table](#)

See Also:

- ["Using the Find Tables Icon"](#) on page 1-4
- *Oracle Database Administrator's Guide* for information on managing tables.
- *Oracle Database Concepts* for conceptual information on tables types.
- *Oracle Database SQL Language Reference* for the syntax required to create and alter tables.

Creating a Table

To create a table:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. Click **Create**.
3. From the list of object types, select **Table**.
4. Enter a table name.
Table names must conform to Oracle naming conventions and not contain spaces or start with a number or underscore.
5. To have the final table name match the case entered in the Table Name field, click **Preserve Case**.
6. Enter details for each column. For each column:
 - a. Enter the column name.
 - b. Select the column type. Available types include NUMBER, VARCHAR2, DATE, TIMESTAMP, CHAR, CLOB, BLOB, NVARCHAR2, BINARY_FLOAT, and BINARY_DOUBLE
 - c. Enter the following additional information as appropriate:
 - Precision
 - Scale
 - d. To specify a column should not be NULL, select the check box in the **Not Null** column.
To change the order of previously entered columns, click the **Up** and **Down** arrows in the Move column. To add additional columns, click **Add Column**.
 - e. Click **Next**.
Next, define the primary key for this table (optional). A primary key is a single field or combination of fields that uniquely identifies a record.
7. For Primary Key, select the appropriate option and click **Next**:
 - **No Primary Key** - No primary key is created.
 - **Populated from a new sequence** - Creates a primary key and creates a trigger and a sequence. The sequence is used in the trigger to populated the selected primary key column. The primary key can only be a single column.

- **Populated from an existing sequence** - Creates a primary key and creates a trigger. The selected sequence is used in the trigger to populate the selected primary key column. The primary key can only be a single column.
- **Not populated** - Defines a primary key but does not have the value automatically populated with a sequence within a trigger. You can also select this option to define a composite primary key (that is, a primary key made up of multiple columns).

Next, add foreign keys (optional). A foreign key establishes a relationship between a column (or columns) in one table and a primary or unique key in another table.

8. To add a foreign key:
 - a. Name - Enter a name of the foreign key constraint that you are defining.
 - b. Select Key Column(s) - Select the columns that are part of the foreign key, then click the **Add** icon to move them to Key Column(s).
 - c. References Table - Select the table which is referenced by this foreign key. Then, select the columns referenced by this foreign key. Once selected, click the **Add** icon to move the selected columns to Referenced Column(s).
 - d. Select the appropriate option:
 - **Disallow Delete** - Blocks the delete of rows from the referenced table when there are dependent rows in this table.
 - **Cascade Delete** - Deletes the dependent rows from this table when the corresponding parent table row is deleted.
 - **Set to Null on Delete** - Sets the foreign key column values in this table to null when the corresponding parent table row is deleted.
 - e. Click **Add**.
 - f. Click **Next**.

Next, add a constraint (optional). You can create multiple constraints, but you must add each constraint separately.

9. To add a constraint:
 - a. Specify the type of constraint (Check or Unique).

A **check constraint** is a validation check on one or more columns within the table. No records can be inserted or updated in a table which violates an enabled check constraint. A **unique constraint** designates a column or a combination of columns as a unique key. To satisfy a unique constraint, no two rows in the table can have the same values for the specified columns.
 - b. Enter the constraint in the field provided. For unique constraints, select the column(s) that are to be unique. For check constraints, enter the expression that should be checked such as `flag in ('Y', 'N')`.
 - c. Click **Add**.
10. Click **Finish**.

A confirmation page appears. To view the SQL used to create the table, click **SQL Syntax**.

11. Click **Create**.

Note that it is not necessary to follow the steps for creating a table in the order described in the previous procedure. Instead of navigating through the wizard by

clicking the Next and Previous button, you can also access a specific step by selecting it in the progress indicator on the left side of the page.

See Also: "Using the Table Finder" in *Oracle Application Express Application Builder User's Guide* and "Overview of Tables" in *Oracle Database Concepts* for information about tables.

Browsing a Table

When you view a table in Object Browser, the table description appears. While viewing this description, you can add a column, modify a column, rename a column, drop a column, rename the table, copy the table, drop the table, truncate the table, or create a lookup table based upon a column in the current table. Additionally, you have access other reports that offer related information including the table data, indexes, data model, constraints, grants, statistics, user interface defaults, triggers, dependencies, and SQL to produce the selected table.

To view a table description:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Tables**.
3. From the Object Selection pane, select a table.
The table description appears.

Summary of Available Views

Click the tabs at the top of the page to view different reports about the table. [Table 1-1](#) describes all available views.

Table 1-1 Available Views for Tables

View	Description
Table	<p>Displays details of the first 31 columns including the column name, data type, nullable status, default value, and primary key. While viewing table details you can add, modify, delete, or rename a column. Additionally, you can drop, rename, copy, or truncate the table only if the referencing table has no records and create a lookup table.</p> <p>To export the data as a comma-delimited file (.csv) file, click the Download link.</p> <p>See Also: "Editing a Table" on page 1-9</p>
Data	<p>Displays a report of the data in the current table. Actions you can perform include:</p> <ul style="list-style-type: none"> ■ Query - Enables you to sort by column. To restrict specific rows, enter a condition in the Column Condition field. Use the percent sign (%) for wildcards. From Order by, select the columns you want to review and click Query. ■ Count Rows - Displays a report of the number of rows in the current table. ■ Insert Row - Enables you to insert a row into the table. ■ Download - Exports all data in the table to a spreadsheet. Click the download link at the bottom of the page to export all data in the selected table.

Table 1–1 (Cont.) Available Views for Tables

View	Description
Indexes	<p>Displays indexes associated with this table. Actions you can perform include Create and Drop.</p> <p>See Also: "Managing Indexes" on page 1-13</p>
Model	<p>Displays a graphical representation of the selected table along with all related tables. Related tables are those that reference the current table in a foreign key and those tables referenced by foreign keys within the current table.</p> <p>You can position the cursor over an underlined table name to view the relationship between that table and the current table. Click an underlined table name to view the model of the related table.</p>
Constraints	<p>Displays a list of constraints for the current table. Actions you can perform include Create, Drop, Enable, and Disable.</p>
Grants	<p>Displays a list of grants on the current table, including the grantee, the privilege, and grant options. Actions you can perform in this view include Grant and Revoke.</p>
Statistics	<p>Displays collected statistics about the current table, including the number of rows and blocks, the average row length, sample size, when the data was last analyzed, and the compression status (enabled or disabled). Click Analyze to access the Analyze Table Wizard.</p>
UI Defaults	<p>Displays user interface defaults for forms and reports. User interface defaults enable developers to assign default user interface properties to a table, column, or view within a specified schema.</p> <p>Click Edit to edit defined user interface defaults. Click Create to initialize user interface defaults for tables that do not currently have user interface defaults defined.</p> <p>See Also: "Managing User Interface Defaults" in <i>Oracle Application Express Application Builder User's Guide</i>.</p>
Triggers	<p>Displays a list of triggers associated with the current table. Actions you can perform include Create, Drop, Enable, and Disable.</p> <p>To view trigger details, click the trigger name.</p> <p>See Also: "Managing Triggers" on page 1-26</p>
Dependencies	<p>Displays report showing objects referenced by this table, objects this table references, and synonyms for this table.</p>
SQL	<p>Displays the SQL necessary to re-create this table, including keys, indexes, triggers and table definition.</p>

Editing a Table

While viewing a table description, you can edit it by clicking the buttons above the table description.

To edit a table:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Tables**.
3. From the Object Selection pane, select a table.

The table description appears.

- Click the appropriate button described in [Table 1-2](#).

Table 1-2 Edit Table Buttons

Button	Description
Add Column	Adds a column to the table. Enter a column name and select a type. Depending upon the column type, specify whether the column requires a value, the column length, precision, and scale.
Modify Column	Modifies the selected column.
Rename Column	Renames the selected column.
Drop Column	Drops the selected column.
Rename	Renames the selected table.
Copy	Copies the selected table.
Drop	Drops the selected table. See Also: "Using the Recycle Bin to View and Restore Dropped Objects" on page 4-11
Truncate	Removes all rows from the selected table. Truncating a table can be more efficient than dropping and re-creating a table. Dropping and re-creating a table may invalidate dependent objects, requiring you to regrant object privileges or re-create indexes, integrity constraints, and triggers.
Create Lookup Table	Creates a lookup table based on the column you select. That column becomes a foreign key to the lookup table.

Dropping a Table

To drop a table:

- On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
- From the Object list, select **Tables**.
- From the Object Selection pane, select a table.
The table description appears.
- Click **Drop**.

See Also: ["Using the Recycle Bin to View and Restore Dropped Objects"](#) on page 4-11

Managing Views

A view is a logical representation of another table or combination of tables. A view derives its data from the tables on which it is based. These tables are called **base tables**. Base tables might in turn be actual tables or might be views themselves. All operations performed on a view actually affect the base table of the view. You can use views in almost the same way as tables. You can query, update, insert into, and delete from views, just as you can standard tables.

Topics in this section include:

- [Creating a View](#)

- [Browsing a View](#)
- [Editing a View](#)
- [Compiling a View](#)
- [Dropping a View](#)

See Also: *Oracle Database Administrator's Guide*

Creating a View

To create a view:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. Click **Create**.
3. From the list of object types, select **View**.
4. Define the view:
 - **View Name** - Enter a name for the View.
 - **Query** - Specify a query to define the view.
To access Query Builder or SQL Command Processor, click the appropriate link at the bottom of the page. The selected tool appears in a pop-up window. Once you create the appropriate SQL, click **Return** to automatically close the popup window and return to the wizard with the SQL.
5. Click **Next**.
A confirmation page appears. To view the SQL used to create the view, click **SQL**.
6. Click **Create**.

See Also: ["Building Queries with Query Builder"](#) on page 5-1 and ["Using SQL Commands"](#) on page 3-1

Browsing a View

When you access a view in Object Browser, the Detail pane displays a report listing the columns in that view.

To browse a view:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Views**.
3. From the Object Selection pane, select a view.
The view definition appears displaying the appropriate columns.

Summary of Available Views

Click the tabs at the top of the page to view different reports. [Table 1-3](#) describes all available views.

Table 1–3 Available Views for Views

View	Description
View	(Default) Displays the columns in the current view. Actions you can perform include: <ul style="list-style-type: none"> ■ Compile ■ Drop <p>See Also: "Editing a View" on page 1-12, "Compiling a View" on page 1-13, and "Dropping a View" on page 1-13</p>
Data	Displays a report of the data in the columns in the view. Actions you can perform include: <ul style="list-style-type: none"> ■ Query - Enables you to sort by column. To restrict specific rows, enter a condition in the Column Condition field. Use the percent sign (%) for wildcards. From Order by, select the columns you want to review and click Query. ■ Count Rows - Enables you to count rows in the table. ■ Insert Row - Enables you to insert a row into the table.
Grants	Displays a list of grants associated with the columns in the view. Grant details include grantee, privilege, and grant options. Actions you can perform include Grant and Revoke .
UI Defaults	Displays user interface defaults for forms and reports. User interface defaults enable developers to assign default user interface properties to a table, column, or view within a specified schema. <p>Click Edit to edit existing user interface defaults. Click Create to initialize user interface defaults for views that do not currently have user interface defaults defined.</p> <p>See Also: "Managing User Interface Defaults" in <i>Oracle Application Express Application Builder User's Guide</i>.</p>
Dependencies	Displays a report showing objects referenced by this view, objects this view references, and synonyms for this view.
SQL	Displays the SQL necessary to re-create this view.

Editing a View

When you edit a view you can edit the code manually, perform a search and replace, and compile the view. Additionally, you can save the view as a file or drop it.

Editing a View Manually

To edit a view manually:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Views**.
3. From the Object Selection pane, select a view.
4. Select the Code tab.
5. Click **Edit** to activate manual edit mode.

If you edit and make changes to a view, you must compile. See "Compiling a View" on page 1-13.

Note: You can expand the Edit pane by clicking the Full Screen icon in the upper right of the pane, beneath the Create button.

Using Find and Replace

Click **Find** to perform a basic search and replace.

Downloading a View

Click **Download** to save the current view as a file.

Compiling a View

If you edit and make changes to a view, you must compile to save your changes. Note that there is no save function since this is just a view of the object within the database.

Click **Compile** to re-create the current view.

Dropping a View

To drop a view:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Views**.
3. From the Object Selection pane, select a view.
4. Select the **View** tab or the **Code** tab.
5. Click **Drop** to delete the current view.

Managing Indexes

An index is an optional structure associated with tables and clusters. You can create indexes on one or more columns of a table to speed access to data on that table.

When you view an index in Object Browser, the Detail pane displays a report containing the index name, index type, table owner, table type, and a listing of the indexed columns.

Topics in this section include:

- [Creating an Index](#)
- [Browsing an Index](#)
- [Dropping an Index](#)

Creating an Index

To create an index:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. Click **Create**.
3. From the list of object types, select **Index**.

4. Select a table and select the type of index you want to create. Available index types include:
 - **Normal** - Indexes one or more scalar typed object attributes of a table
 - **Text** - Creates a text index (Oracle Text)
5. Click **Next**.
6. Create the index definition. Specify an index name, select one or more columns to be indexed, and click **Next**.
 A confirmation page appears. To view the SQL used to create the index, click **SQL**.
7. Click **Finish**.

Browsing an Index

To browse an index:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
 Object Browser appears.
2. From the Object list, select **Indexes**.
3. From the Object Selection pane, select an index.
 The index appears displaying the index name, type, table owner, table type and a listing of indexed columns.

Summary of Available Views

Click the tabs at the top of the page to view different reports about the index. [Table 1–4](#) describes all available views.

Table 1–4 Available Views for Indexes

View	Description
Object Details	(Default) Displays the index name, index type, table owner, and table type and also a listing of the indexed columns. Actions you can perform while viewing Object Details include: <ul style="list-style-type: none"> ■ Disable - Disables the current index ■ Drop - Drops the current index.x ■ Rebuild - Rebuilds the current index
Statistics	Displays collected statistics about the current view, including the number of rows, sample size, when the data was last analyzed, and the compression status (enabled or disabled). Click Analyze to refresh the displayed statistics.
SQL	Displays the SQL necessary to re-create this index.

Dropping an Index

To drop an index:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
 Object Browser appears.
2. From the Object list, select **Indexes**.
3. From the Object Selection pane, select an index.

- Under Object Details, click the **Drop** tab.

Managing Sequences

A sequence generates a serial list of unique numbers for numeric columns of a database table. Database sequences are generally used to populate table primary keys.

Topics in this section include:

- [Creating a Sequence](#)
- [Browsing a Sequence](#)
- [Dropping a Sequence](#)

Creating a Sequence

To create a sequence:

- On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
- Click **Create**.
- From the list of object types, select **Sequence**.
- Define the sequence, specify a sequence name, and click **Next**.

A confirmation page appears. To view the SQL used to create the sequence, click **Show SQL**.

- Click **Create**.

Browsing a Sequence

To browse a sequence:

- On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
- From the Object list, select **Sequences**.
- From the Object Selection pane, select a sequence.

The Object Details view appears.

Summary of Available Views

Click the tabs at the top of the page to view different reports about the sequence. [Table 1–5](#) describes all available views.

Table 1–5 Available Views for Sequences

View	Description
Object Details	(Default) Displays details about the current sequence. Actions you can perform in this view include Alter and Drop .
Grant	Displays a list of grants associated with the sequence. Grant details include grantee, privilege, and grant options. Actions you can perform include Grant and Revoke .
Dependencies	Displays a list of objects that use (or depend) upon this sequence.

Table 1–5 (Cont.) Available Views for Sequences

View	Description
SQL	Displays the SQL necessary to re-create this sequence.

Dropping a Sequence

To drop a sequence:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Sequences**.
3. From the Object Selection pane, select a sequence.
The Object Details view appears.
4. Click **Drop**.

Managing Types

A type is a user-specified object or collection definition. Oracle Application Express currently only supports collection definitions. There are two categories of Oracle collections (SQL collections):

- Variable-length arrays (VARRAY types)
- Nested tables (TABLE types)

VARRAY types are used for one-dimensional arrays, while nested table types are used for single-column tables within an outer table.

Topics in this section include:

- [Creating a Type](#)
- [Browsing a Type](#)
- [Dropping a Type](#)

See Also: *Oracle Database Concepts* and *Oracle Database PL/SQL Language Reference* for information about collection types

Creating a Type

To create a collection type:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. Click **Create**.
3. From the list of object types, select **Type**.
4. Specify a name and click **Next**.
5. Select a type, data type, limit, and click **Next**.

A confirmation page appears. To view the SQL used to create the collection type, click **Show SQL**.

6. Click **Finish**.

Browsing a Type

To browse a collection type:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Type**.
3. From the Object Selection pane, select a type.
The Object Details view appears.

Summary of Available Views

Click the tabs at the top of the page to view different reports. [Table 1–6](#) describes all available views.

Table 1–6 Available Views for Types

View	Description
Object Details	(Default) Displays details about the selected type. To drop a type, click Drop .
Synonyms	Displays a list of synonyms for the current type.
Grants	Displays a list of grants associated with the type. Grant details include grantee, privilege, and grant options. Actions you can perform include Grant and Revoke .
SQL	Displays the SQL necessary to re-create this type.

Dropping a Type

To drop a collection type:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Type**.
3. From the Object Selection pane, select a type.
The Object Details view appears.
4. Click **Drop**.

Managing Packages

A package is a database object that groups logically related PL/SQL types, items, functions and procedures. Packages usually have two parts, a specification and a body. The **specification** is the interface to your application. The **body** implements the specification.

Topics in this section include:

- [Creating a Package](#)
- [Viewing a Package](#)
- [Editing a Package](#)
- [Compiling a Package](#)
- [Downloading a Package](#)

- [Dropping a Package](#)

See Also:

- "Using PL/SQL Packages" in *Oracle Database PL/SQL Language Reference* for additional information on PL/SQL packages.
- "Using PL/SQL Subprograms" in *Oracle Database PL/SQL Language Reference* for information on PL/SQL subprograms

Creating a Package

To create a package:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. Click **Create**.
3. From the list of object types, select **Package**.
4. Select the type of package you want to create:
 - Specification
 - Body
 - Package with methods on database tables
5. If you select **Specification**:
 - a. Enter a name and click **Next**.
The wizard creates a dummy package specification and displays it for editing.
 - b. Edit the specification and click **Finish**.
6. If you select **Body**:
 - a. Select the package you want to create the body for and click **Next**.
The wizard creates a package body with stubbed out calls identified in the specification and displays it for editing.
 - b. Edit the package body and click **Finish**.
7. If you select **Package with methods on database tables**:
 - a. Enter a name and click **Next**.
 - b. Select up to ten tables and click **Next**.
The wizard creates a specification and body with insert, update, delete, and GET APIs for the selected tables. Note that you have the option to show or download the specification or body.
 - c. Click **Finish**.

Viewing a Package

When you access a package in Object Browser the specification appears.

To view a specification:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.

2. From the Object list, select **Packages**.
3. From the Object Selection pane, select a package.

The Specification appears. You can copy the code in this view for use in other tools.

Summary of Available Views

Click the tabs at the top of the page to view different reports about the package. [Table 1-7](#) describes all available views.

Table 1-7 Available Views for Packages

View	Description
Specification	(Default) Displays the package specification. This define the interface to your application. Actions you can perform include: <ul style="list-style-type: none"> ▪ Edit ▪ Compile ▪ Download ▪ Drop ▪ Find
Body	Displays the package body, if one exists, for the selected package. Actions you can perform include: <ul style="list-style-type: none"> ▪ Edit ▪ Compile ▪ Download ▪ Drop ▪ Find
Dependencies	Displays objects that use (or depend on) on the current package and objects the package depends on.
Errors	Displays errors related to the current package.
Grants	Lists details of grants for the current package, including privilege, grantee, grantable, grantor, and object name.

Editing a Package

When you edit a package, you can edit the code manually, perform a search and replace, and compile the package.

Editing a Package Manually

To edit a package manually:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Packages**.
3. From the Object Selection pane, select a package.

The Specification appears. You can copy the code in this view for use in other tools. Note you can edit both the specification and the body from Object Browser.

4. Click **Edit** to activate edit mode.

5. Click **Find** to perform a basic search and replace.

Note: You can expand the Edit pane by clicking the Full Screen icon in the upper right of the pane, beneath the Create button.

Compiling a Package

If you edit and make changes to a package, you must compile to save your changes. There is no save function because this is just a view of the object within the database.

To compile a package:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Packages**.
3. From the Object Selection pane, select a package.
The Specification appears.
4. Click **Compile** to compile the current package.
Compiling re-creates the object in the database. If the compile fails, an error message display above the code.

Downloading a Package

To download a package:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Packages**.
3. From the Object Selection pane, select a package.
The Specification appears.
4. Click **Download** to save the current package as a file.

Dropping a Package

To drop a package while viewing the Specification:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Packages**.
3. From the Object Selection pane, select a package.
The Specification appears.
4. Click **Drop** to delete the current package.

To drop a package while viewing the Body:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Packages**.

3. From the Object Selection pane, select a package.
The Specification appears.
4. Click the **Body** tab.
5. Click **Drop**.

Managing Procedures

A procedure is a subprogram that performs a specific action. You can use Object Browser to view, create, edit, download, and drop procedures.

Topics in this section include:

- [Creating a Procedure](#)
- [Browsing a Procedure](#)
- [Editing a Procedure](#)
- [Compiling a Procedure](#)
- [Downloading a Procedure](#)
- [Dropping a Procedure](#)

See Also: *Oracle Database PL/SQL Language Reference*

Creating a Procedure

To create a procedure:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. Click **Create**.
3. From the list of object types, select **Procedures**.
4. Enter a procedure name and click **Next**.
5. Define the arguments by specifying the following information (optional):
 - Argument Name
 - In/Out (the parameter mode)
 - Argument Type (datatype)
 - Default (value)

To add additional arguments, click **Add Argument**.

6. Click **Next**.
7. Enter PL/SQL block you want to use as the procedure body and click **Next**.
To view the previously defined arguments, click **Defined Arguments**.

A confirmation page appears. To view the SQL used to create the procedure, click **Show SQL**.

8. Click **Finish**.

Browsing a Procedure

To browse a procedure:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Procedures**.
3. From the Object Selection pane, select a procedure.

The Code view appears, displaying the source code for the procedure. You can copy the code in this view for use in other tools.

Summary of Available Views

Click the tabs at the top of the page to view different reports about the procedure. [Table 1-8](#) describes all available views.

Table 1-8 Available Views for Procedures

View	Description
Code	(Default) Displays the source code for the procedure. You can copy the code in this view for use in other tools. Actions you can perform in this view include: <ul style="list-style-type: none"> ▪ Edit ▪ Compile ▪ Download ▪ Drop ▪ Find <p>See Also: "Editing a Procedure" on page 1-22, "Compiling a Procedure" on page 1-23, "Downloading a Procedure" on page 1-23, and "Dropping a Procedure" on page 1-23</p>
Dependencies	Displays objects that use (or depend) on the current procedure and objects the procedure depends on.
Errors	Lists errors related to the current procedure.
Grants	Lists details of grants for the current procedure, including privilege, grantee, grantable, grantor, and object name.

Editing a Procedure

When you edit a procedure you can edit the code manually or perform a search and replace.

Editing a Procedure Manually

To edit a procedure manually:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Procedures**.
3. From the Object Selection pane, select a procedure.

The Code view appears. By default, you can copy the code in this view for use in other tools.

4. Click **Edit** to activate edit mode.

5. Click **Find** to perform a basic search and replace.

Note: You can expand the Edit pane by clicking the Full Screen icon in the upper right of the pane, beneath the Create button.

Compiling a Procedure

If you edit and make changes to a procedure, you must compile to save your changes. There is no save function because this is just a view of the object within the database.

To compile a procedure:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Procedures**.
3. From the Object Selection pane, select a procedure.
4. Click **Compile** to compile the current procedure.

Compiling re-creates the object in the database. If the compile fails, an error message display above the code.

Downloading a Procedure

To download a procedure:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Procedures**.
3. From the Object Selection pane, select a procedure.
4. Click **Download** to save the current procedure as a file.

Dropping a Procedure

To drop a procedure:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Procedures**.
3. From the Object Selection pane, select a procedure.
4. Click **Drop** to delete the current procedure.

Managing Functions

A function is a subprogram that can take parameters and return a single value.

Topics in this section include:

- [Creating a Function](#)
- [Browsing a Function](#)
- [Editing a Function](#)

- [Compiling a Function](#)
- [Downloading a Function](#)
- [Dropping a Function](#)

See Also: *Oracle Database SQL Language Reference* for information about PL/SQL functions and *Oracle Database PL/SQL Language Reference*

Creating a Function

To create a function:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. Click **Create**.
3. From the list of object types, select **Functions**.
4. Enter a function name, specify the return datatype, and click **Next**.
5. Define the arguments and click **Next** (optional):
 - Argument Name
 - Argument Type (datatype)
 - Default (value)

To add additional arguments, click **Add Argument**.

6. Enter PL/SQL block you want to use as the function body and click **Next**.

To link to SQL Commands, click **Command Processor**. To view the previously defined arguments, click **Defined Arguments**.

A confirmation page appears. To view the SQL used to create the function, click **Show SQL**.

7. Click **Finish**.

Browsing a Function

To view a function in Object Browser:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Functions**.
3. From the Object Selection pane, select a function.

The Code view appears. You can copy the code in this view for use in other tools.

Summary of Available Views

Click the tabs at the top of the page to view different reports about the function. [Table 1–9](#) describes all available views.

Table 1–9 Available Views for Functions

View	Description
Code	<p>(Default) Displays the source code for the function. You can copy the code in this view for use in other tools. Actions you can perform in this view include:</p> <ul style="list-style-type: none"> ▪ Edit ▪ Compile ▪ Download ▪ Drop ▪ Find <p>See Also: "Editing a Function" on page 1-25, "Compiling a Function" on page 1-25, "Downloading a Function" on page 1-26, and "Dropping a Function" on page 1-26</p>
Dependencies	Displays objects that use (or depend) on the current function and objects the function depends on.
Errors	Displays errors related to the current function.
Grants	Lists details of grants for the current function, including privilege, grantee, grantable, grantor, and object name.

Editing a Function

When you edit a function you can edit the code manually, perform a search and replace, and compile the function.

Editing a Function Manually

To edit a function manually:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Functions**.
3. From the Object Selection pane, select a function.
The Code view appears. By default, you can copy code from this view for use in other tools.
4. Click **Edit** to activate manual edit mode.
5. Click **Find** to perform a basic search and replace.

Note: You can expand the Edit pane by clicking the Full Screen icon in the upper right of the pane, beneath the Create button.

Compiling a Function

If you edit and make changes to a function, you must compile to save your changes. There is no save function because this is just a view of the object within the database.

To compile a function in Object Browser:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Functions**.

3. From the Object Selection pane, select a function.
The Code view appears.
4. Click **Compile** to compile the current function.
Compiling re-creates the object in the database. If the compile fails, an error message display above the code.

Downloading a Function

To save a function to a file in Object Browser:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Functions**.
3. From the Object Selection pane, select a function.
The Code view appears.
4. Click **Download** to save the current function as a file.

Dropping a Function

To drop a function in Object Browser:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Functions**.
3. From the Object Selection pane, select a function.
The Code view appears.
4. Click **Drop** to delete the current function.

Managing Triggers

A database trigger is a stored subprogram associated with a database table, view, or event. The trigger can be called once, for example when an event occurs, or many times, for example for each row affected by an INSERT, UPDATE, or DELETE statement.

Topics in this section include:

- [Creating Triggers](#)
- [Browsing a Trigger](#)
- [Editing a Trigger](#)
- [Compiling a Trigger](#)
- [Downloading a Trigger](#)
- [Dropping a Trigger](#)

See Also:

- *Oracle Database Concepts*
- *Oracle Database Advanced Application Developer's Guide*

Creating Triggers

To create a trigger in Object Browser:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. Click **Create**.
3. From the list of object types, select **Trigger**.
4. Select a table name and click **Next**.
5. Select the appropriate trigger attributes, enter the trigger body, and click **Next**.
A confirmation page appears. To view the SQL used to create the trigger, click **SQL**.
6. Click **Finish**.

Browsing a Trigger

To browse a trigger in Object Browser:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Triggers**.
3. From the Object Selection pane, select a trigger.
The Details view appears.

Summary of Available Views

Click the tabs at the top of the page to view different reports about the trigger. [Table 1–10](#) describes all available views.

Table 1–10 Available Views for Triggers

View	Description
Object Details	(Default) Lists of the details about the current trigger. Actions you can perform include: <ul style="list-style-type: none"> ▪ Compile ▪ Disable ▪ Download ▪ Drop ▪ Code See Also: " Editing a Trigger " on page 1-27, " Compiling a Trigger " on page 1-28, " Downloading a Trigger " on page 1-28, and " Dropping a Trigger " on page 1-28
Errors	Displays errors related to the current trigger.
SQL	Displays the SQL necessary to re-create the trigger.

Editing a Trigger

When you edit a trigger you can edit the code manually, perform a search and replace, and compile the trigger.

Editing a Trigger Manually

To edit a trigger manually:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Triggers**.
3. From the Object Selection pane, select a trigger.
4. Select the **Code** tab and then click **Edit** to activate manual edit mode.
5. Click **Find** to perform a basic search and replace.

Note: You can expand the Edit pane by clicking the Full Screen icon in the upper right of the pane, beneath the Create button.

Compiling a Trigger

If you edit and make changes to a function, you must compile to save your changes. There is no save function because this is just a view of the object within the database.

To compile a trigger in Object Browser:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Triggers**.
3. From the Object Selection pane, select a trigger.
The Details view appears.
4. Click **Compile** to compile the current trigger.

Compiling re-creates the object in the database. If the compile fails, an error message display above the code.

Downloading a Trigger

To save the current trigger as a file:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Triggers**.
3. From the Object Selection pane, select a trigger.
The Details view appears.
4. Click **Download** to save the current trigger as a file.

Dropping a Trigger

To save drop a trigger in Object Browser:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Triggers**.

3. From the Object Selection pane, select a trigger.
The Details view appears.
4. Click **Drop** to delete the current trigger.

Managing Database Links

A database link is a schema object in one database that enables you to access objects in another database. Once you create a database link, you can access the remote objects by appending `@dblink` to the table or view name, where `dblink` is the name of the database link.

Topics in this section include:

- [Creating a Database Link](#)
- [Browsing a Database Link](#)
- [Dropping a Database Link](#)

Creating a Database Link

To create a database link:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. Click **Create**.
3. From the list of object types, select **Database Link**.
4. Specify the following information and click **Next**.
 - Database Link Name
 - Connect To Schema
 - Password
 - Remote Hostname or IP
 - Remove Host Port
 - SID or Service NameA confirmation page appears.
5. To view the SQL used to create the database link, click **Show SQL**.
6. Click **Create**.

Browsing a Database Link

To browse a database link:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Database Links**.
3. From the Object Selection pane, select a database link.
The Object Details view appears.

Summary of Available Views

Click the tabs at the top of the page to view different reports about the database link. [Table 1–11](#) describes all available views.

Table 1–11 Available Views for Database Links

View	Description
Object Details	(Default) Displays details about the database link. Actions you can perform include: <ul style="list-style-type: none"> ■ Drop - Deletes the database link ■ Test - Tests the database link
Dependencies	Displays a list of objects that use (or depend) upon this database link.
SQL	Displays the SQL necessary to re-create this database link.

Dropping a Database Link

To drop a database link in Object Browser:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Database Links**.
3. From the Object Selection pane, select a database link.
The Object Details View appears.
4. Click **Drop**.

Managing Materialized Views

A materialized view provides indirect access to table data by storing the results of a query in a separate schema object. Unlike an ordinary view, which does not take up any storage space or contain any data, a materialized view contains the rows resulting from a query against one or more base tables or views. A materialized view can be stored in the same database as its base tables or in a different database.

Topics in this section include:

- [Creating a Materialized View](#)
- [Browsing a Materialized View](#)
- [Dropping a Materialized View](#)

See Also: *Oracle Database Concepts* for information about materialized views

Creating a Materialized View

To create a materialized view:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. Click **Create**.
3. From the list of object types, select **Materialized View**.

4. Define the materialized view:
 - a. **Materialized View Name** - Enter a name.
 - b. **Query** - Specify a query to define the view.
 To access Query Builder or SQL Command Processor, click the appropriate link at the bottom of the page. The selected tool appears in a pop-up window. Once you generate the appropriate SQL, click **Return** to automatically close the popup window and return to the wizard with the SQL.
 - c. Click **Next**.
 A confirmation page appears. To view the SQL used to create the materialized view, click **SQL**.
5. Click **Create**.

See Also: ["Building Queries with Query Builder"](#) on page 5-1 and ["Using SQL Commands"](#) on page 3-1

Browsing a Materialized View

To view a materialized view:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Materialized Views**.
3. From the Object Selection pane, select a view.
The Materialized View appears.

Summary of Available Views

Click the tabs at the top of the page to view different reports about the materialized view. [Table 1-12](#) describes all available views.

Table 1-12 Available Views for Materialized View

View	Description
Materialized View	(Default) Displays details about the columns in the materialized view, including: <ul style="list-style-type: none"> ■ Column Name ■ Data type ■ Nullable flag ■ Default value ■ Primary key Click Drop to delete the current materialized view.

Table 1–12 (Cont.) Available Views for Materialized View

View	Description
Data	Displays a report of the data in the columns. Actions you can perform include: <ul style="list-style-type: none"> ▪ Query - Enables you to sort by column. To restrict specific rows, enter a condition in the Column Condition field. Use the percent sign (%) for wildcards. From Order by, select the columns you want to review and click Query. ▪ Count Rows - Displays a report of the data in the current table. ▪ Download - Click this link to export the data as a comma-delimited file (.csv) file.
Details	Displays object details stored in DBA_SNAPSHOTS such as updatable and status.
Grants	Displays a list of grants on the current view, including grantee, privilege, and grant options. Actions you can perform in this view include Grant and Revoke .
Dependencies	Displays a list of objects that use (or depend) upon this materialized view.
SQL	Displays the SQL necessary to re-create this materialized view.

Dropping a Materialized View

To drop a materialized view in Object Browser:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Materialized Views**.
3. From the Object Selection pane, select a view.
The Materialized View appears.
4. Click **Drop**.

Managing Synonyms

A synonym is an alias for a schema object. Synonyms can provide a level of security by masking the name and owner of an object and by providing location transparency for remote objects of a distributed database. Also, they are convenient to use and reduce the complexity of SQL statements for database users.

Topics in this section include:

- [Creating Synonyms](#)
- [Viewing a Synonym](#)
- [Dropping a Synonym](#)

See Also: *Oracle Database Administrator's Guide* for information about synonyms

Creating Synonyms

To create a synonym:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. Click **Create**.
3. From the list of object types, select **Synonym**.
4. Define the synonym:
 - a. **Synonym Name** - Enter a name.
 - b. **Public or Private** - Specify whether the synonym should be public or private.
 - c. **Schema** - Select the database schema (or user name) which owns the object upon which you want to create your synonym.
 - d. **Object** - Enter the name of the object upon which you want to create a synonym.
 - e. **Database Link** - Enter the name of the database link to use if the synonym is to be create on a remote object.
 - f. Click **Next**.A confirmation page appears. To view the SQL used to create the synonym, click **Show SQL**.
5. Click **Finish**.

See Also: ["Managing Synonyms"](#) on page 1-32

Viewing a Synonym

To view a synonym:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Synonyms**.
3. From the Object Selection page, select a synonym.

The Object Details view appears displaying the following:

- Synonym owner
- Synonym name
- Object owner
- Object Name
- Object Status
- Status

Dropping a Synonym

To drop a synonym in Object Browser:

1. On the Workspace home page, click **SQL Workshop** and then **Object Browser**.
Object Browser appears.
2. From the Object list, select **Synonyms**.
3. From the Object Selection pane, select a synonym and click **Drop**.

Using SQL Scripts

This section provides information on how to use SQL Scripts to create, edit, view, run, and delete script files.

This section contains the following topics:

- [What is SQL Scripts?](#)
- [Accessing SQL Scripts](#)
- [Creating a SQL Script](#)
- [Using the Script Editor](#)
- [Deleting a SQL Script](#)
- [Copying a SQL Script](#)
- [Executing a SQL Script](#)
- [Viewing SQL Script Results](#)
- [Exporting and Importing SQL Scripts](#)
- [Viewing Script and Result Quotas](#)

What is SQL Scripts?

A SQL script is a set of SQL commands saved as a file in SQL Scripts. A SQL script can contain one or more SQL statements or PL/SQL blocks. You can use SQL Scripts to create, edit, view, run, and delete script files.

When using SQL Scripts, remember the following:

- SQL*Plus commands in a SQL script are ignored at run time.
- There is no interaction between SQL Commands and SQL Scripts.
- You can cut and paste a SQL command from the SQL Script editor to run it in SQL Commands.
- SQL Scripts does not support bind variables.


See Also: "Using SQL Commands" on page 3-1 and "About Long Operations" on page 4-16

Accessing SQL Scripts

To access SQL Scripts:

1. Log in to the Workspace home page.


2. To view SQL Scripts page you can either:
 - Click the **SQL Workshop** icon and then **SQL Scripts** to drill-down to the SQL Scripts page.
 - Click the down arrow on the right side of the SQL Workshop icon to view a drop down menu. Then select the **SQL Scripts** menu option.

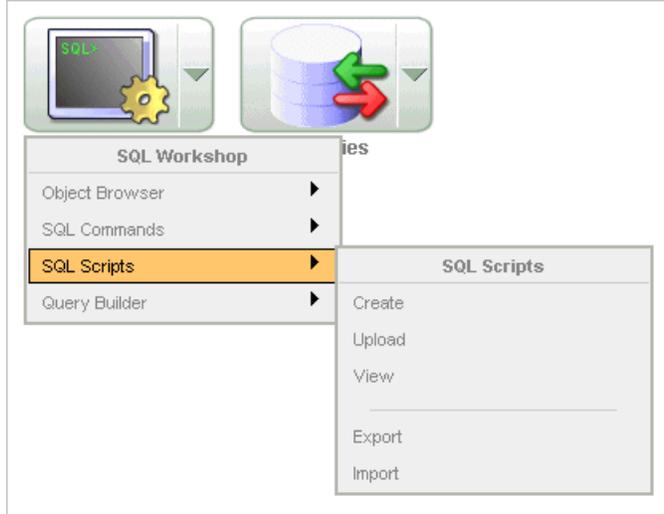

Note: For the purposes of consistency, this document uses the primary navigation path (or drill-down approach) when explaining navigation.

About the SQL Scripts Page

The SQL Scripts page display all SQL scripts created by the current user. You can control the appearance of the page by making a selection from the View list. The default view, Icons, displays each script as an icon. Details view displays each script as a row in a report.

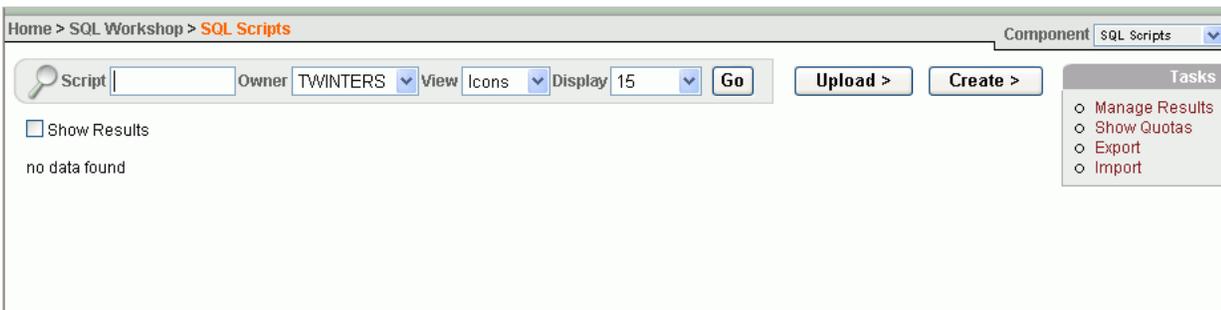

The SQL Scripts page features the following controls:

- **Script.** Search for a script by entering the script name, or a partial name, in the Script field and clicking **Go**. You control how many rows display by making a selection from the Display list.
- **Owner.** Search for the owner of the script you want to view by entering the user name in the Owner field and clicking **Go**.

- **View.** Change the appearance of the SQL Scripts page by making a selection from the View list and clicking **Go**. Available View options include:
 - **Icons** (default) displays each script as an icon identified by the script name. Click the **Show Results** check box to additionally display run results as icons identified by the script name.
 - **Details** displays each script as a line in a report. Each line includes a check box to enable the selection of scripts for deletion, an edit icon to enable the script to be loaded into the script editor, the script name, the script owner, when the script was last updated and by who, the size in bytes, the number of times the script has been run linked to the run results, and an icon to enable the script to be run.

Details view offers the following additional controls:

 - **Delete Checked.** In Details view, select the check box associated with the script you want to delete and click **Delete Checked**. See "[Deleting a SQL Script](#)" on page 2-7.
 - **Sort.** In Details view, click a column heading to sort the listed scripts by that column.
- **Upload.** Click **Upload** to upload a script from your local file system into SQL Scripts. See "[Creating a SQL Script](#)" on page 2-4.
- **Create.** Click **Create** to create a script in the Script Editor. See "[Creating a SQL Script](#)" on page 2-4.

Switching to Another SQL Workshop Component

You can navigate to another SQL Workshop component by making a selection from the Component list located on the upper right side of the page:

- **Object Browser.** See "[Managing Database Objects with Object Browser](#)" on page 1-1.
- **SQL Commands.** See "[Using SQL Commands](#)" on page 3-1.
- **SQL Scripts.** See "[Using SQL Scripts](#)" on page 2-1.
- **Query Builder.** See "[Building Queries with Query Builder](#)" on page 5-1.

About the Tasks List

A Tasks list displays on the right side of the SQL Scripts page.



The Task list contains the following links:

- **Manage Results** enables you to view, search, and display results. See "[Viewing SQL Script Results](#)" on page 2-10.
- **Show Quotas** displays the Script Quotas page. The Script Quotas page shows the maximum size of a single result, the maximum size of all results, the quota used and the quota free. It also shows the maximum size of a SQL Script.
- **Export** enables you to export multiple scripts from the current SQL Script Repository for import into SQL Scripts in a different workspace. The scripts you

select to export are encoded in a single export script written to your local file system. The export script is named *workspace_name_script.sql* by default. See ["Exporting and Importing SQL Scripts"](#) on page 2-12.

- **Import** enables you to import a script exported by this workspace, or a different workspace. **Import** only imports scripts encoded in an export script created using **Export**. The export script to import must be accessible on your local file system. See ["Exporting and Importing SQL Scripts"](#) on page 2-12.

Creating a SQL Script

You can create a script in the Script Repository by:

- Creating a script in the Script Editor
- Uploading a script from your local file system

Topics in this section include:

- [Creating a SQL Script in the Script Editor](#)
- [Uploading a SQL Script](#)

Creating a SQL Script in the Script Editor

To create an SQL script in the Script Editor:

1. On the Workspace home page, click **SQL Workshop** and then **SQL Scripts**.
The SQL Scripts page appears.
2. Click the **Create** button.
The Script Editor appears.
3. Enter a name for the script in the Script Name field.
Script name extensions are optional.
4. Enter the SQL statements, PL/SQL blocks and SQL*Plus commands you want to include in your script.
Remember that SQL Command Line commands are ignored at run time.
5. Click **Save** to save your script to the repository.
The SQL Scripts page appears listing your newly saved script.

Uploading a SQL Script

To upload a script from your local file system:

1. On the Workspace home page, click **SQL Workshop** and then **SQL Scripts**.
The SQL Scripts page appears.
2. Click the **Upload** button.
The Upload Script dialog appears.
3. To upload a script you can either:
 - Enter the name and path to the script you want to upload to the Script Repository.
 - Click **Browse** to locate the script you want to upload.

4. Optionally rename the script by entering the new name in the Script Name field.
This is the name given to the script in the Script Repository.
5. Click **Upload** to add the script to the Script Repository.
The SQL Scripts page appears listing your newly uploaded script.
The script is parsed during upload. If it has a syntax error, an error icon appears in place of the run icon in the SQL Scripts page Details view.
If a script of the same name exists in the Script Repository, you are prompted to rename it.

Using the Script Editor

You use the Script Editor to add content to a new script, to edit existing scripts, and to run and delete scripts in the script repository.

Topics in this section include:


- [Editing an Existing Script](#)
- [Searching and Replacing Text or Regular Expressions](#)
- [Summary of Script Editor Controls](#)

Editing an Existing Script

To edit a SQL script:

1. On the Workspace home page, click **SQL Workshop** and then **SQL Scripts**.
The SQL Scripts page appears.
2. You can load a script into the editor as follows:
 - In Icons view, click the script icon.
 - In Details view, click the **Edit** icon.

The Script Editor appears.

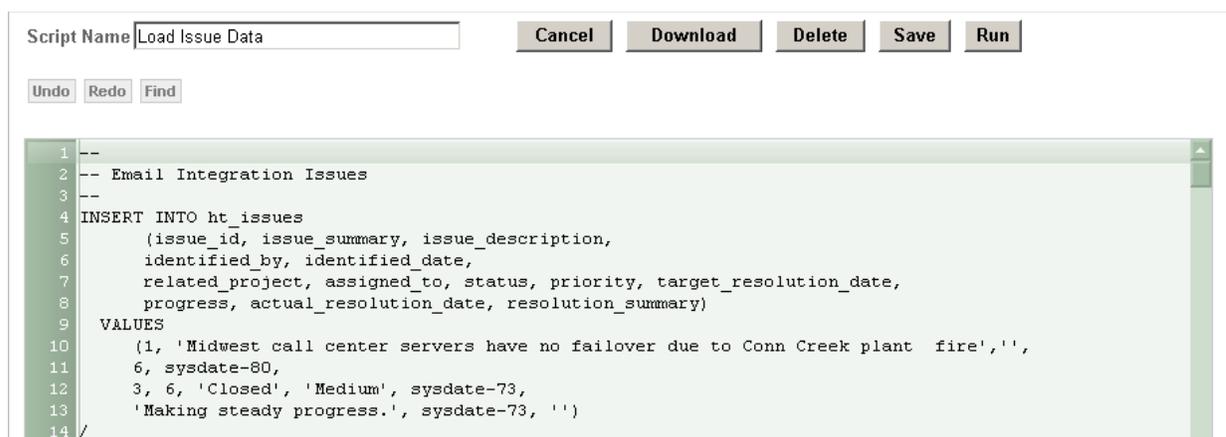

3. Edit the script.

Note that new lines are automatically indented to the previous line start column.
Other features of the Script Editor include:


- Search and Replace. Click **Find** to display the text and JavaScript regular expression find and replace options. Click **Find** again to hide the options. See ["Searching and Replacing Text or Regular Expressions"](#) on page 2-6.
- Line Selection. Click the line number on the left side of the Script Editor to select the associated line of your script for copying or deleting.
- **Cut, Copy, and Paste.** Use standard edit controls to cut, copy and paste content in the Script Editor.
- **Auto indenting lines.** New lines automatically indent to the previous line start column.

You can test your script during editing by running the script to reveal errors. The Run Script dialog and the Script Results pages enable you to resume editing the script. See ["Executing a SQL Script"](#) on page 2-8, and ["Viewing SQL Script Results"](#) on page 2-10.

4. Click **Save** to save your script to the Script Repository,
The SQL Scripts page appears.

Searching and Replacing Text or Regular Expressions

Clicking the **Find** button in the Script Editor displays the Find and Replace with fields at the top of the page. Use these fields to search for and replace text strings and JavaScript regular expressions within a script. To exit Find mode, click **Find** again.

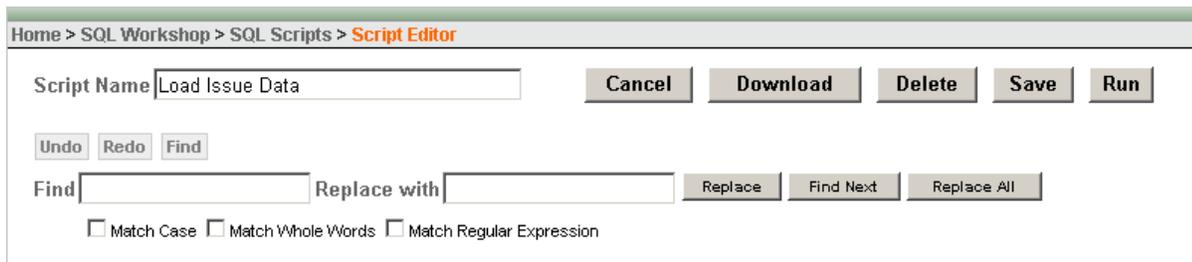

To access Find mode in the Script Editor:

1. On the Workspace home page, click **SQL Workshop** and then **SQL Scripts**.
The SQL Scripts page appears.
2. Select a script.
The Script Editor appears.
3. Click the **Find** button.
The Find and Replace fields appear.
4. In the Find field, enter the string you want to find. In Replace with, enter the new string to be added and then click the appropriate button (Replace, Find Next, or Replace All.)

To further refine your search, select the appropriate check box:

- Match Case
 - Match Whole Words
 - Match Regular Expression
5. To exit Find mode, click **Find**.

Summary of Script Editor Controls

Table 2–1 describes the buttons and controls available within the Script Editor

Table 2–1 Buttons and Controls within the Script Editor

Button	Descriptions
Cancel	Cancel the editing session and exit the Script Editor without saving changes made since the last save.
Download	Saves a copy of the current script to your local file system. Enter a name for the script on your local file system and a directory path.
Delete	Removes the current script from the Script Repository. See Also: "Deleting a SQL Script" on page 2-7
Save	Save your changes to the current script to the Script Repository.
Run	Submits the script for execution. See Also: "Executing a SQL Script" on page 2-8
Undo (Ctrl+Z)	Removes, or undoes, the most recent line edit made in the Script Editor.
Redo (Ctrl+Y)	Repeats the most recent line edit made in the Script Editor.
Find	Click Find to access search and replace mode. Click Find again to exit Find mode. See Also: "Searching and Replacing Text or Regular Expressions" on page 2-6

Deleting a SQL Script

You can delete scripts from the Script Repository by deleting selected scripts from the SQL Scripts page, or deleting the current script in the Script Editor.

Topics in this section include:

- [Deleting Scripts from the SQL Scripts Page](#)
- [Deleting a Script in the Script Editor](#)

Deleting Scripts from the SQL Scripts Page

To delete scripts from the SQL Scripts page.

1. On the Workspace home page, click **SQL Workshop** and then **SQL Scripts**.

The SQL Scripts page appears.

2. From the View list, select **Details** and click **Go**.

Details view appears.

3. Select the scripts to be deleted.

To select individual scripts, click the check box to the left of the Edit icon. To select all scripts visible in the current page, click the check box in the column heading.

4. Click **Delete Checked** to permanently remove the selected scripts from the Script Repository. You are prompted to confirm this action before the script is deleted.

The message "Script(s) deleted" appears above the updated list of Scripts.

Deleting a Script in the Script Editor

To delete a script in the Script Editor:

1. On the Workspace home page, click **SQL Workshop** and then **SQL Scripts**.
The SQL Scripts page appears.
2. Open the script you want to delete in the Script Editor.
3. Click **Delete** to permanently remove the script from the Script Repository. You are prompted to confirm this action before the script is deleted.

The SQL Scripts page appears. The message "Script(s) deleted" appears above the updated list of scripts.

Copying a SQL Script

You can copy a script in the Script Repository by saving it with a new name.

To copy a script:

1. On the Workspace home page, click **SQL Workshop** and then **SQL Scripts**.
The SQL Scripts page appears.
2. Load the script to copy into the editor.
3. Enter a name for the copied script in the Script Name field.
4. Click **Save** to save a copy of the script in the Script Repository.

The SQL Scripts page appears listing the newly copied script.

Executing a SQL Script

You can execute scripts stored in the Script Repository. You can submit a script for execution either from the Script Editor, or from the SQL Scripts page.

When you submit a script for execution, the Run Script page appears. It displays the script name, when it was created and by who, when it was last updated and by who, the number of statements it contains, and its size in bytes. It also lists unknown statements such as SQL*Plus commands that are ignored during execution.

Finally, it lists statements with errors. If there are errors, the **Run** control does not appear.

Topics in this section include:

- [Executing a SQL Script in the Script Editor](#)
- [Executing a SQL Script from the SQL Scripts Page](#)
- [About the Run Script Page](#)

See Also: ["About Long Operations"](#) on page 4-16

Executing a SQL Script in the Script Editor

To execute a script in the Script Editor:

1. Open the script you want to execute in the Script Editor. See ["Using the Script Editor"](#) on page 2-5.
2. Click **Run** in the Script Editor.

3. The Run Script page appears.

The Run Script page displays information about the script and lists statements in error preventing execution, or statements such as SQL*Plus commands that are ignored when the script is executed.

The Run Script page has three controls:

- **Cancel** returns you to the SQL Scripts page without executing the script.
 - **Edit Script** loads the script into the Script Editor. Note that **Edit Script** appears instead of **Run** when a script has errors.
 - **Run** to submit the script for execution. Note that **Run** is not available if there are script errors.
4. Click **Run** to submit the script for execution.
The Manage Script Results page appears listing script results.
 5. To view script results, click the **View** icon under View Results.

See Also: "Viewing SQL Script Results" on page 2-10

Executing a SQL Script from the SQL Scripts Page

To execute a script from the SQL Scripts page:

1. On the Workspace home page, click **SQL Workshop** and then **SQL Scripts**.

The SQL Scripts page appears.

2. From the View list, select **Details** and click **Go**.

Details view appears.

3. Click the **Run** icon for the script you want to execute. The Run icon is located on the far right side adjacent to the script name.

4. The Run Script page appears.

The Run Script page displays information about the script and lists statements in error preventing execution, or statements such as SQL*Plus commands that are ignored when the script is executed. The Run Script page has three controls:

Cancel to return to the SQL Scripts page without executing the script.

Edit Script to load the script into the Script Editor. **Edit Script** appears instead of **Run** when a script has errors.

Run to submit the script for execution. **Run** is not available for scripts with errors.

5. Click **Run** to submit the script for execution.

The Manage Script Results page appears listing available results for the script.

6. Click the View icon for the results you want to view. The View icon is at the right end of the scripts listed in the Manage Script Results page.

See Also: "Viewing SQL Script Results" on page 2-10

About the Run Script Page

On the Run Script page, you can:

- **Cancel the execution.** Click **Cancel** to exit the Run Script page without executing the script. The SQL Scripts page appears.

- **Edit the script.** **Edit Script** appears instead of **Run** when a script has errors. Click **Edit Script** to load the script into the Script Editor to remove the lines with errors.
- **Execute the script.** Click **Run** to execute the script.

Viewing SQL Script Results

You use the Manage Script Results page to view and delete script results.

You can also select script results to view from the Icons view of the SQL Scripts page, and from the Results column of the SQL Scripts page Details view.

Topics in this section include:

- [Viewing Results from the SQL Scripts Page](#)
- [About the Results Page](#)

Viewing Results from the SQL Scripts Page

To view script results from the SQL Scripts page:

1. On the Workspace home page, click **SQL Workshop** and then **SQL Scripts**.
The SQL Scripts page appears.
2. You can access the Manage Script Results page in the following ways:
 - On the Tasks list, click **Manage Results**.
 - In Details view, click the Results number for the script you want to display.
 - In Icons view, click the **Show Results** check box and then the appropriate icon. Results icons only appear in the Icons view if you click the Show Results check box.

The Manage Script Results page appears, listing available results for the script. See "[About the Manage Script Results Page](#)" on page 2-10.

Script	Run By	Started	Elapsed	Status	Statements	Bytes	View Results
<input type="checkbox"/> Load Issue Data	DOCTEST	7 weeks ago	0.80	Complete	28 of 28	0	
<input type="checkbox"/> Update Project Dates	DOCTEST	7 weeks ago	0.09	Complete	5 of 5	0	
<input type="checkbox"/> Load Project Data	DOCTEST	7 weeks ago	0.40	Complete	5 of 5	0	
<input type="checkbox"/> DDL for Issue Management Application	DOCTEST	7 weeks ago	3.05	Complete	80 of 80	0	
row(s) 1 - 4 of 4							

3. Click the **View** icon for the results you want to view. The View icons display on the far right side of page under the heading View Results.

The Results page appears. See "[About the Results Page](#)" on page 2-11.

About the Manage Script Results Page

On the Manage Script Results page you can:

- **Search for a result.** Enter a result name or partial name in the Script field and click **Go**. To view all results, leave the Script field blank and click **Go**. You control how many rows display by making a selection from the Display list.

- **Change the Page View.** You can change the appearance of the page by making a selection from the View list. Available View options include:
 - **Icons** displays each result as an icon identified by the script name, and time and date stamp.
 - **Details** displays each result as a line in a report. Each line includes a check box to enable the selection of results for deletion, the associated script name which is a link enabling it to be loaded into the Script Editor, who ran the script, when the run started, how long it took to run, whether the run is complete or not, the number of statements executed, the size in bytes, and a View icon to view the results.
- **Delete a result.** In Details view, select the check box associated with each result you want to delete, and click **Delete Checked**.
- **Sort results.** In Details view, click a column heading to sort the listed results by that column.

About the Results Page

The Results page displays the script name and status (Complete, Canceled, Executing or Submitted), and lists the statements executed.

Home > SQL > SQL Scripts > Results

Script: **Load Issue Data** Status: **Complete**

View: Detail Summary Display

Number ▲	Elapsed	Statement	Feedback	Rows
1	0.12	INSERT INTO ht_issues (issue_id, issue_summary, issue_	1 row(s) inserted.	1
2	0.01	INSERT INTO ht_issues (issue_id, issue_summary, issue_	1 row(s) inserted.	1
3	0.00	INSERT INTO ht_issues (issue_id, issue_summary, issue_	1 row(s) inserted.	1
4	0.02	INSERT INTO ht_issues (issue_id, issue_summary, issue_	1 row(s) inserted.	1
5	0.01	INSERT INTO ht_issues (issue_id, issue_summary, issue_	1 row(s) inserted.	1
6	0.01	INSERT INTO ht_issues (issue_id, issue_summary, issue_	1 row(s) inserted.	1
7	0.00	INSERT INTO ht_issues (issue_id, issue_summary, issue_	1 row(s) inserted.	1
8	0.01	INSERT INTO ht_issues (issue_id, issue_summary, issue_	1 row(s) inserted.	1
9	0.01	INSERT INTO ht_issues (issue_id, issue_summary, issue_	1 row(s) inserted.	1
10	0.01	INSERT INTO ht_issues (issue_id, issue_summary, issue_	1 row(s) inserted.	1
11	0.01	INSERT INTO ht_issues (issue_id, issue_summary, issue_	1 row(s) inserted.	1
12	0.01	INSERT INTO ht_issues (issue_id, issue_summary, issue_	1 row(s) inserted.	1
13	0.00	INSERT INTO ht_issues (issue_id, issue_summary, issue_	1 row(s) inserted.	1
14	0.01	INSERT INTO ht_issues (issue_id, issue_summary, issue_	1 row(s) inserted.	1
15	0.01	INSERT INTO ht_issues (issue_id, issue_summary, issue_	1 row(s) inserted.	1

row(s) 1 - 15 of 28

Statements Processed 28
 Successful 23
 With Errors 5

On the Results page you can:

- **Choose the view.** Click the **Detail** or **Summary** option and click **Go** to specify whether to display complete or summarized information.
- **Choose the number of rows to display.** In Summary view, make a selection from the Display list and click **Go** to specify the number of rows displayed.

- **Sort the statement report.** In Summary view, select a column heading to sort the listed values by that column.
- **Edit the script.** Click **Edit Script** to load the script into the Script Editor. See ["Using the Script Editor"](#) on page 2-5.

Exporting and Importing SQL Scripts

You can transfer scripts from your current Script Repository to a Script Repository in a different workspace by using the Export and Import tasks. Exported scripts are encoded in a single file on your local file system. Once exported, you then log in to another workspace and import the file. During import, the file is run to re-create the scripts in the current Script Repository.

By default, the Export SQL Scripts page lists all scripts in the Script Repository created by the current user. There are two panes on the Export SQL Scripts page, the Scripts pane and the Scripts to Export pane. You use the Scripts pane to select scripts to export. Then, you use the Scripts to Export pane to finalize the scripts to export, to choose a name for the export script, and to save the selected scripts in the export script on your local file system. You use the Import Scripts pane to select the export script containing the scripts to import.

Topics in this section include:

- [Copying Scripts to an Export Script](#)
- [Importing Scripts from an Export Script](#)

Copying Scripts to an Export Script

To copy scripts to an export script:

1. On the Workspace home page, click **SQL Workshop** and then **SQL Scripts**.
The SQL Scripts page appears.
2. On the Tasks list, click **Export**.
The Export SQL Scripts page appears.
3. Click the check box for each of the scripts you want to export. The check boxes display on the left side adjacent to the script name. To select all displayed scripts for export, click the column head check box.
4. Click **Add to Export** to create a list of scripts to be added to the export script.
The selected scripts are added to the list of scripts in the Scripts to Export pane.
5. Enter a name for the export script in the File Name field.
The default script name is *workspace_name_script.sql*.
6. Click **Export All** to export the scripts to the export script.
You are prompted to enter the directory where you want to save the export script.

About the Scripts Pane

Scripts

Cancel Add To Export

Use this page to export one or more scripts for importing into another workspace.

Owner CBCHO Find Display 10 Go

<input type="checkbox"/>	Owner	Name	Last Updated	Bytes
<input type="checkbox"/>	CBCHO	n2	7 days ago	1,440
<input type="checkbox"/>	CBCHO	emp.sql	2 weeks ago	18
<input type="checkbox"/>	CBCHO	x2	4 weeks ago	18
<input type="checkbox"/>	CBCHO	emp2.sql	8 weeks ago	20
<input type="checkbox"/>	CBCHO	B.SQL	8 weeks ago	17
<input type="checkbox"/>	CBCHO	x2.sql	8 weeks ago	17
<input type="checkbox"/>	CBCHO	x.sql	8 weeks ago	32
<input type="checkbox"/>	CBCHO	call_another3	8 weeks ago	17
<input type="checkbox"/>	CBCHO	create table x	2 months ago	58
<input type="checkbox"/>	CBCHO	mike_script	2 months ago	297

row(s) 1 - 10 of 33

Scripts to Export

Click **Export All** to export all scripts listed below.

No scripts have been selected for export. Check the scripts you wish to export and then click **Add To Export**.

In the Scripts pane you can:

- **Search for a script.** Enter a script name or partial name in the Find field and click **Go**. To view all scripts, leave the Find field blank, select - **All Users** - from the Owner list and click **Go**. You control how many rows display by making a selection from the Display list.
- **Cancel the export.** Click **Cancel** to return to the SQL Scripts page without exporting any scripts, or to return to the SQL Scripts page after saving an export script.
- **Selecting scripts to export.** Click **Add to Export** to add scripts to the export script. Scripts added to the export script are no longer listed in the Script pane, but appear in the Scripts to Export pane.
- **Sort scripts.** Click a column heading to sort the listed scripts by that column.

About the Scripts to Export Pane

Scripts to Export Remove Checked Export All

Click **Export All** to export all scripts listed below.

File Name

Remove	Name
<input type="checkbox"/>	n2
<input type="checkbox"/>	emp.sql
<input type="checkbox"/>	x2
<input type="checkbox"/>	emp2.sql
<input type="checkbox"/>	B:SQL

row(s) 1 - 5 of 5

In the Scripts to Export pane you can:

- **Rename the export script.** Enter a name for the export script in the File Name field or leave the default script name.
- **Remove scripts.** Click the check box adjacent to the scripts you want to remove and click **Remove Checked**. Scripts removed are no longer listed in the Scripts to Export pane, but appear in the Scripts pane.
- **Save the export script.** Click **Export All** to save the export script to your local file system. You are prompted to enter the directory where you want to save the export script.

Importing Scripts from an Export Script

To import scripts from an export script:

1. On the Workspace home page, click **SQL Workshop** and then **SQL Scripts**.
The SQL Scripts page appears.
2. On the Tasks list, click **Import**.
The Import Scripts pane appears. See "[About the Import Scripts Pane](#)" on page 2-15.
3. Enter the name and path to the export script you want to import to the Script Repository, or click **Browse** to locate the export script you want to import.
4. Click **Next** to list the scripts in the export script.
The Action column indicates whether the imported script is new, or whether it replaces an existing script of the same name.
5. Click **Import Script(s)** to import the listed scripts into the current Script Repository.
The SQL Scripts page appears listing the imported scripts.

About the Import Scripts Pane

In the Import Scripts pane you can:

- **Enter the export script.** Enter the name and path of the script to import in the Import file field, or click **Browse** to locate the script.
- **Cancel the import.** Click **Cancel** to return to the SQL Scripts page without importing scripts.
- **Proceed with the import.** Click **Next** to import the scripts in the specified export script. You can review the listed scripts to import.
- **Choose another export file.** Click **Previous** to return to the Import Scripts file selection page to choose a different export script.
- **Import the scripts.** Click **Import Script(s)** to import the scripts contained in the export script.

Viewing Script and Result Quotas

You can view the script limits in the current workspace on the Script Quotas page.

To view the Script Quotas page:

1. On the Workspace home page, click **SQL Workshop** and then **SQL Scripts**.
The SQL Scripts page appears.
2. On the Tasks list, click **Show Quotas**.
The Script Quotas page appears.
3. Click **OK** to return to the SQL Scripts page.

About the Script Quotas Page

The Script Quotas page displays the following limits:

- Result Quota in Bytes:
 - **Maximum Script Result Size.** The maximum size in bytes of a single script result.
 - **Quota for All Script Results.** The maximum size in bytes of all results in this workspace.
 - **Used.** The number of bytes currently used in this workspace.
 - **Free.** The number of bytes currently free in this workspace.
 - **Quota.** A usage bar illustrating the percentage of quota currently used.
- Script Quota in Bytes:

- **Maximum Script Size.** The maximum size in bytes of a single script. The size is set by the Oracle Application Express administrator and cannot be changed from within the Workspace.
- **Maximum Script Size.** The maximum size in bytes of a single script.

Using SQL Commands

This section provides information on how to use SQL Commands to create, edit, view, run, and delete SQL commands.

This section contains the following topics:

- [What is SQL Commands?](#)
- [Accessing SQL Commands](#)
- [About the SQL Commands Home Page](#)
- [Using the Command Editor](#)
- [Saving a SQL Command](#)
- [Copying a Command](#)
- [Using Saved Commands](#)
- [Using SQL Command History](#)
- [Viewing Results](#)
- [Using Explain Plan](#)

See Also:

- *Oracle Database SQL Language Reference* for detailed information about SQL statements and other parts of SQL, such as operators, functions, and format models
- *Oracle Database Concepts* for conceptual information about SQL
- *SQL*Plus User's Guide and Reference* for information about SQL*Plus, Oracle's version of SQL
- *Oracle Database Sample Schemas* for information about the HR sample schema that is used for examples in this chapter

What is SQL Commands?

You can use SQL Commands to create, edit, view, run, and delete SQL commands. A SQL command can contain SQL statements or PL/SQL blocks.

When using SQL Commands, remember the following:

- SQL commands created in the Query Builder can be accessed in SQL Commands.
- Saved SQL commands must have names unique within a given workspace.
- There is no interaction between SQL Commands and SQL Scripts.


- You can cut and paste a SQL command from SQL Commands to run in the SQL Script Editor.

See Also: "Using SQL Scripts" on page 2-1

Accessing SQL Commands

To access SQL Commands:

1. Log in to the Workspace home page.
The Workspace home page appears.
2. To view the SQL Commands home page you can either:
 - Click **SQL Workshop** and then **SQL Commands** to drill-down to the SQL Commands home page.
 - Click the down arrow on the right side of the SQL Workshop icon to view a drop down menu. Then select the **SQL Commands** menu option.

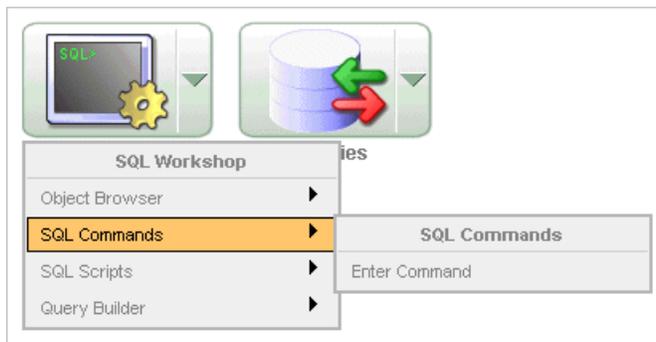

Note: For the purposes of consistency, this document uses the primary navigation path (or drill-down approach) when explaining navigation.

About the SQL Commands Home Page

The SQL Commands home page is divided into two sections: a command editor and a display pane. You use the command editor to execute SQL commands and the display pane to view output, saved command lists, and history lists.



The top of the SQL Commands home page features a command editor and the following controls:

- **Autocommit.** If available, click the **Autocommit** check box to enable autocommit and disable transactional commands. See "[About Transactions in SQL Commands](#)" on page 3-5.
- **Display.** Make a selection from the Display list to specify the number of rows of output to display simultaneously up to a maximum of 100,000. All rows of DBMS Output are displayed regardless of the Display list setting.
- **Clear Command icon.** The Clear Command icon resembles a pencil with an eraser. Use this icon to clear the text in the command editor.
- **Find Tables icon.** The Find Tables icon resembles a flashlight. Click this icon to view tables and views. See "[Using the Find Tables Icon](#)" on page 1-4.
- **Save.** Click the **Save** button to save the contents of the command editor, or the currently highlighted content to a file. You are prompted to enter a name and an optional description. The command appears in the Saved SQL list. See "[Saving a SQL Command](#)" on page 3-6.
- **Run.** Click the **Run** button (or press Ctrl+Enter) to run the command in the command editor, or the currently highlighted command in the command editor. See "[Running a SQL Command](#)" on page 3-5.

See Also: "[Using the Command Editor](#)" on page 3-4

Selecting a Schema

A schema is a logical container for database objects. To access objects in another schema, make a selection from the Schema list in the upper right side of the page.

Switching to Another SQL Workshop Component

You can navigate to another SQL Workshop component by making a selection from the Component list located on the upper right side of the page:

- **Object Browser.** See "[Managing Database Objects with Object Browser](#)" on page 1-1.
- **SQL Commands.** See "[Using SQL Commands](#)" on page 3-1.
- **SQL Scripts.** See "[Using SQL Scripts](#)" on page 2-1.
- **Query Builder.** See "[Building Queries with Query Builder](#)" on page 5-1.

About the Display Pane

A display pane displays at the bottom of the SQL Commands home page.

Results Explain Describe Saved SQL History			
DEPARTMENT_ID	DEPARTMENT_NAME	MANAGER_ID	LOCATION_ID
10	Administration	200	1700
20	Marketing	201	1800
30	Purchasing	114	1700
40	Human Resources	203	2400
50	Shipping	121	1500
60	IT	103	1400
70	Public Relations	204	2700
80	Sales	145	2500
90	Executive	100	1700
100	Finance	108	1700

More than 10 rows available. Increase rows selector to view more rows.

10 rows returned in 0.07 seconds [Download](#)

The display pane features five tabs:

- **Results.** Click the **Results** tab to see the results from the last successfully executed SQL command. Click **DBMS Output** at the bottom of the displayed results to display lines of DBMS output. This control only appears when there is DBMS output to display. Click **Download** to export results to a comma-delimited file on your local file system. See "[Viewing Results](#)" on page 3-9.
- **Explain.** Click the **Explain** tab to examine the execution plan used by the optimizer for statements that make changes to the database. Objects in the output are linked to the Object Browser. Click the linked object to view its properties in the Object Browser. See "[Using Explain Plan](#)" on page 3-10.
- **Describe.** Enter Describe *object_name* and click **Run** to display column definitions for a table or view, or specifications for a function or procedure in the **Describe** tab. Select links in the Describe results to write that information into the command editor. For example, click a table name to add *owner.table*, click a column name to add the *column name*, click a procedure or function name to add the object call with parameters, or click a package name to add the package call.
- **Saved SQL.** Click the **Saved SQL** tab to display a list of all SQL commands saved in the current workspace. Click the command title to load it into the command editor. See "[Using Saved Commands](#)" on page 3-7
- **History.** Click the **History** tab to list your recently executed commands. Your last 200 executed commands are saved. See "[Using SQL Command History](#)" on page 3-8.

Using the Command Editor

You use the command editor in SQL Commands to execute SQL commands within Application Express.

Topics in this section include:

- [Running a SQL Command](#)
- [About Transactions in SQL Commands](#)
- [About Unsupported SQL*Plus Commands](#)

- [About Command Termination](#)
- [Using Bind Variables](#)

Running a SQL Command

To execute a SQL Command:

1. On the Workspace home page, click **SQL Workshop** and then **SQL Commands**.
The SQL Commands page appears.
2. Enter the SQL command you want to run in the command editor.
3. Click **Run** (Ctrl+Enter) to execute the command.

Tip: To execute a specific statement, select the statement you want to run and click **Run**.

The results appear in the Results pane.

4. To export the resulting report as a comma-delimited file (.csv) file, click the **Download** link.

See Also: "Viewing Results" on page 3-9

About Transactions in SQL Commands

To disable transactional SQL commands in SQL Commands, check the Autocommit check box. Attempting to use any transactional SQL commands such as COMMIT or ROLLBACK when transactional mode is disabled returns an error message.

To enable transactional SQL commands, clear the Autocommit check box. Oracle Application Express verifies that the necessary system resources are available before entering the transactional mode. If resources are unavailable, an error message is displayed.

Transactional mode is a stateful transaction mode where you can, for example, perform an update, select data for review, and COMMIT or ROLLBACK changes. It is implemented using DBMS_JOBS.

Consider the following behavior in transactional mode:

- Actions are not committed to the database until you enter an explicit COMMIT command.
- Exiting SQL Commands terminates and rolls back the current transaction.
- A session timeout terminates and rolls back the current transaction.

Note that the Environment Setting, *SQL Commands Maximum Inactivity in minutes*, sets the time before an inactive session times out. The default timeout is 60 minutes. See "Configuring SQL Workshop" in *Oracle Application Express Administration Guide*.

- The **CSV Export** option is not available.

About Unsupported SQL*Plus Commands

SQL Commands does not support SQL*Plus commands. If you attempt to enter a SQL Command Line command such as SET ECHO or DEFINE in SQL Commands, an error message displays.

About Command Termination

You can terminate a command in SQL Commands using a semicolon (;), a slash (/), or with nothing. Consider the following valid alternatives:

```
SELECT * from emp;
```

```
SELECT * from emp  
/
```

```
SELECT * from emp
```

The first example demonstrates the use of a semicolon (;), the second example demonstrates using a slash (/), and the final example demonstrates a command with no termination.

Using Bind Variables

Bind variables are supported. You are prompted to enter values for bind variables during command execution. Bind variables are prefixed with a colon.

For example

```
SELECT * from emp where deptno = :dept
```

In earlier versions of Oracle Application Express, you could check your Workspace ID by running the command:

```
SELECT :WORKSPACE_ID FROM dual
```

In this release, run the following SQL command to check your Workspace ID:

```
SELECT v('WORKSPACE_ID') FROM dual
```

Saving a SQL Command

You can save commands you enter in SQL Commands.

To save a SQL command:

1. On the Workspace home page, click **SQL Workshop** and then **SQL Commands**.
The SQL Commands page appears.
2. Enter the command in the command editor.
3. Click **Save** to save the command.

You are prompted to enter a name and description for the command.

4. Click **Save**, or click **Cancel** to return to the command editor without saving.
The saved command is listed in the display area.

Copying a Command

To copy a SQL command:

1. On the Workspace home page, click **SQL Workshop** and then **SQL Commands**.
The SQL Commands page appears.
2. Click the **Saved SQL** tab.
The Saved SQL list of commands appears in the display pane.

3. Click the title of the command to load it into the command editor
4. Click **Save** to save the command.
5. Enter a name for the command in the Name field and click **Save**.

The command is copied to the new name.

Using Saved Commands

You can access the commands you save and commands saved by other users in the same workspace. You can also access SQL commands you and other users of the same workspace saved from the Query Builder.

Topics in this section include:

- [Accessing Saved Commands](#)
- [About the Saved SQL Pane](#)

Accessing Saved Commands

To access saved SQL commands:

1. On the Workspace home page, click **SQL Workshop** and then **SQL Commands**.

The SQL Commands page appears.

2. Click the **Saved SQL** tab.

The Saved SQL list of commands appears in the display pane.

3. Click the title of the command to load it into the command editor.

The command appears in the editor.

4. Click **Run** to execute the command.

About the Saved SQL Pane

The Saved SQL pane displays a list of all commands saved under the current workspace. The list displays commands saved from SQL Commands and SQL commands saved from Query Builder. Saved SQL commands must have unique names in the current workspace. The same name cannot be used in the Query Builder and SQL Commands.

Each command entry shows the owner name, the command name, the first characters of the SQL command, a description if it exists, who last updated the command and when.

<input type="checkbox"/>	Owner	Name	Description	SQL	Updated By	Last Updated
<input type="checkbox"/>	SIMON	dbmssql	SELECT to run dbmsfunc and generate mixed output	select abc(empno) from emp;	SIMON	2 weeks ago
<input type="checkbox"/>	SIMON	dbmsfunc	Function to create mixed HTML and dbms_output output	create or replace function abc(a number) return number as begin dbms_output.put_line (a); return a * 2; end;	SIMON	2 weeks ago
						row(s) 1 - 2 of 2

On the Saved SQL pane you can:

- **Show commands by owner.** Make a selection from the Owner list to specify the user whose commands you want to display. To view all scripts select **-All Users-**.
- **Search for a command.** Enter a command name or partial name, or enter a code snippet in the Find field and click **Go**. To view all scripts, leave the Find field blank and click **Go**. You control how many rows display by making a selection from the Rows list.
- **Set the Number of Output Rows.** Make a selection from the Display list to specify the number of Saved SQL commands to display simultaneously.
- **Delete a command.** Click the check box associated with each command you want to delete, and click **Delete Checked**.
- **Sort commands.** Click a column heading to sort the listed commands by that column.

Using SQL Command History

Commands you have executed are stored in the command history regardless of whether you explicitly save them. You use SQL Command History to access commands you have executed in SQL Commands.

Topics in this section include:

- [Accessing a Command from Command History](#)
- [About the History Pane](#)

Accessing a Command from Command History

To access history commands:

1. On the Workspace home page, click **SQL Workshop** and then **SQL Commands**.
The SQL Commands page appears.
2. Click the **History** tab.
The list of commands in History appears in the display pane.
3. Click the partial command displayed in the SQL column.
The command appears in the editor.

About the History Pane

The History pane displays a list of commands you have executed.

Results Explain Describe Saved SQL History		
Find <input type="text"/> <input type="button" value="Go"/>		
Time ▼	SQL	Schema
10 days ago	alter table "MY_EMPLOYEES" drop column "MANAGER_ID" /	HR2
10 days ago	alter table "MY_EMPLOYEES" add ("DEPARTMENT_ID" NUMBER(4,0) NULL) /	HR2
10 days ago	alter table "MY_EMPLOYEES" add ("MANAGER_ID" NUMBER(6,0) NULL) /	HR2
10 days ago	drop TABLE "MY_EMPLOYEES" /	HR2
11 days ago	drop INDEX "LAST_NAME_INDEX" /	HR2
11 days ago	create index "LAST_NAME_INDEX" on "EMPLOYEES" ("LAST_NAME") /	HR2
11 days ago	drop VIEW "MY_VIEW" /	HR2
11 days ago	create or replace view "MY_VIEW" as select "DEPARTMENTS"."DEPARTMENT_ID" as "DEPARTMENT_ID", "D	HR2
11 days ago	drop SYNONYM "EMPS" /	HR2
11 days ago	create synonym "EMPS" for "HR2"."employees" /	HR2
11 days ago	drop SEQUENCE "MY_SEQUENCE" /	HR2
11 days ago	create sequence "MY_SEQUENCE" start with 1000 increment by 1 nocache nocycle noorder /	HR2

16 - 27

Each history entry shows the time the command was last executed, the first characters of the command, and the schema in which it was executed.

On the History pane you can:

- **Load a command.** Click the partial command displayed in the SQL column to load the command into the command editor. When the command loads, it also sets the schema in which it was last executed.
- **Sort by time.** Click the Time column heading to sort the command history by least recent or most recent.

Viewing Results

When you execute a SQL command, the results are displayed. The results of the last executed command are available until you execute another SQL command, or leave SQL Commands.

Topics in this section include:

- [Accessing the Results Pane](#)
- [About the Results Pane](#)

Accessing the Results Pane

To display SQL command results:

1. On the Workspace home page, click **SQL Workshop** and then **SQL Commands**. The SQL Commands page appears.
2. Click the **Results** tab.

Results Explain Describe Saved SQL History			
DEPARTMENT_ID	DEPARTMENT_NAME	MANAGER_ID	LOCATION_ID
10	Administration	200	1700
20	Marketing	201	1800
30	Purchasing	114	1700
40	Human Resources	203	2400
50	Shipping	121	1500
60	IT	103	1400
70	Public Relations	204	2700
80	Sales	145	2500
90	Executive	100	1700
100	Finance	108	1700

More than 10 rows available. Increase rows selector to view more rows.

10 rows returned in 0.01 seconds [CSV Export](#)

The HTML formatted results appear in the display pane.

3. Click **DBMS Output** to display plain text DBMS output results.

The **DBMS Output** control only appears if there is DBMS output in addition to HTML formatted results. It does not appear if there is only DBMS output, or if there is only HTML formatted output.

About the Results Pane

The Results pane displays SQL command results as HTML formatted table. The number of rows returned appears after the output, and the time taken. DBMS output appears as plain text after the HTML formatted results.

On the Results pane you can:

- **Display DBMS output.** Click **DBMS Output** at the bottom of the displayed results to display lines of DBMS output. This control only appears when there is DBMS output to display.
- **Export results.** Click **CSV Export** to export results to a comma-delimited file on your local file system. You are prompted to enter a name and directory for the file.

Using Explain Plan

You can view the explain plan the Oracle Optimizer uses to run your SQL command. It is not necessary to execute the command to view the explain plan.

Results Explain Describe Saved SQL History								
Query Plan								
Operation	Options	Object	Rows	Time	Cost	Bytes	Filter Predicates *	Access Predicates
SELECT STATEMENT			27	1	3	540		
TABLE ACCESS	FULL	DEPARTMENTS	27	1	3	540		

* Unindexed columns are shown in red

Index Columns								
Owner	Table Name	Index Name	Used In Plan	Columns	Uniqueness	Status	Index Type	Join Index
HR2	DEPARTMENTS	DEPT_LOCATION_IX		LOCATION_ID	NONUNIQUE	VALID	NORMAL	NO
		DEPT_ID_PK		DEPARTMENT_ID	UNIQUE	VALID	NORMAL	NO

Table Columns			
Table Owner	Table Name	Column Name	Data Type
HR2	DEPARTMENTS	DEPARTMENT_ID	NUMBER
		DEPARTMENT_NAME	VARCHAR2
		MANAGER_ID	NUMBER
		LOCATION_ID	NUMBER

Topics in this section include:

- [Viewing an Explain Plan](#)
- [About Explain Plan Pane](#)

Viewing an Explain Plan

To view the Explain Plan:

1. On the Workspace home page, click **SQL Workshop** and then **SQL Commands**.
The SQL Commands page appears.
2. Enter or load the command whose plan you want to view.
3. Click the **Explain** tab.

The explain plan used by the optimizer appears in the display pane.

About Explain Plan Pane

The Explain Plan pane shows the plan used by the Oracle Optimizer to run your SQL command. It typically displays the Query Plan, Index Columns and Table Columns used.

On the Explain Plan pane you can:

- **View object definitions.** Click the object name in Query Plan to display the object definition in the Object Browser.
- **View index definitions.** Click the index name in Table Columns to display the index definition in the Object Browser.

Using Oracle Application Express Utilities

This section describes how to use Oracle Application Express utilities to load and unload data from an Oracle database, generate DDL, view object reports, and restore dropped database objects.

This section contains the following topics:

- [About Importing, Exporting, Loading, and Unloading Data](#)
- [Loading and Unloading Data from the Database](#)
- [Generating DDL](#)
- [Viewing Object Reports](#)
- [Using the Recycle Bin to View and Restore Dropped Objects](#)
- [Reviewing Application Express Views](#)
- [Comparing Schemas](#)
- [Monitoring the Database](#)
- [Viewing Database Details](#)

About Importing, Exporting, Loading, and Unloading Data

You have several options when copying data between Oracle databases or between an Oracle database and external files. Data copying is accomplished by *exporting* and *importing* data, and by *unloading* and *loading* data. The following table defines these terms.

Term	Definition
Exporting	Copying database data to external files for import into another Oracle database only. The files are in a proprietary binary format.
Importing	Copying data into the database from external files that were created by exporting from another Oracle database.
Unloading	Copying database data to external text files for consumption by another Oracle database or another application (such as a spreadsheet application). The text files are in an industry-standard format such as tab-delimited or comma-delimited (CSV).
Loading	Copying data into the database from external text files that are in either a standard delimited format or in any of the formats that are supported by the Oracle SQL*Loader utility.

You can export data from any Oracle Database edition (Express Edition, Standard Edition, and Enterprise Edition) into any other edition.

This section contains the following topics:

- [Choosing the Right Import/Export/Load/Unload Option](#)

Choosing the Right Import/Export/Load/Unload Option

The Oracle Database and Oracle Application Express provide several powerful options for importing, exporting, loading, and unloading data. [Table 4–1](#) provides a summary of these options.

Table 4–1 Summary of Oracle Application Express Import/Export Options

Feature or Utility	Description
Data Load/Unload wizards in Oracle Application Express	<ul style="list-style-type: none"> ■ Easy to use graphical interface ■ Loads/unloads from and to external text files (delimited fields) or XML files ■ Loads/unloads tables only, one table at a time ■ Access only to schema of logged-in user ■ No data filtering
SQL*Loader utility	<ul style="list-style-type: none"> ■ Command-line interface, invoked with <code>sqlldr</code> command ■ Bulk-loads data into the database from external files ■ Supports numerous input formats, including delimited, fixed record, variable record, and stream ■ Loads multiple tables simultaneously ■ Powerful data filtering capabilities
Data Pump Export and Data Pump Import utilities	<ul style="list-style-type: none"> ■ Command-line interface, invoked with <code>expdp</code> and <code>impdp</code> commands ■ Exports and imports from one Oracle database to another (proprietary binary format) ■ Imports/exports all schema object types ■ Imports/exports entire database, entire schema, multiple schemas, multiple tablespaces, or multiple tables ■ Powerful data filtering capabilities ■ High speed
Export and Import utilities	<ul style="list-style-type: none"> ■ Command-line interface, invoked with <code>exp</code> and <code>imp</code> commands ■ Exports and imports from one Oracle database to another (proprietary binary format) ■ Supports XMLType data ■ Does not support the <code>FLOAT</code> and <code>DOUBLE</code> data types ■ Capabilities similar to Data Pump; Data Pump is preferred

[Table 4–2](#) provides several load, unload, import, and export scenarios and suggests the appropriate option to use for each.

Table 4–2 Import/Export Scenarios and Recommended Options

Import/Export Scenario	Recommended Option
You have fewer than 10 tables to load, the data is in spreadsheets or tab- or comma-delimited text files, and there are no complex data types (such as objects or multivalued fields).	Data Load/Unload wizards in Oracle Application Express
You have to load data that is not delimited. The records are fixed length, and field definitions depend on column positions.	SQL*Loader
You have tab-delimited text data to load, and there are more than 10 tables.	SQL*Loader
You have text data to load, and you want to load only records that meet certain selection criteria (for example, only records for employees in department number 3001).	SQL*Loader
You want to import or export an entire schema from or to another Oracle database. There is no XMLType data in any of the data.	Data Pump Export and Data Pump Import
You want to import or export data from or to another Oracle database. The data contains XMLType data and contains no FLOAT or DOUBLE data types.	Import (imp) and Export (exp)

See Also: *Oracle Database Utilities* for more information on Data Pump, the Import and Export utilities, and SQL*Loader

Loading and Unloading Data from the Database

The Data Load/Unload wizards in Oracle Application Express enable you to easily load and unload delimited text data to and from the database. The step-by-step wizards have the following features:

- You can load or unload XML files or delimited-field text files (such as comma-delimited (.csv) or tab-delimited files).
- You can load by copying and pasting from a spreadsheet.
- You can omit (skip) columns when loading or unloading.
- You can load into an existing table or create a new table from the loaded data.
- When loading into a new table, the primary key can be taken from the data or generated from a new or existing Oracle sequence.
- When loading into a new table, column names can be taken from the loaded data.
- Each time that you load from a file, file details are saved in a Text Data Load Repository. You can access these files from within the repository at any time.

Limitations include the following:

- The wizards load and unload table data only. They do not load or unload other kinds of schema objects.
- You can load and unload to and from your own schema only. This is also true for users with administrator privileges.
- You can load or unload only a single table at a time.
- There are no data type limitations for unloading to text or XML files, or for loading from XML files. However, when loading from spreadsheets (through copy and paste) or from text files, only the following data types are supported: NUMBER, DATE, VARCHAR2, CLOB, BINARY_FLOAT, and BINARY_DOUBLE.

Supported unload formats include:

- Text such as comma-delimited or tab-delimited data
- XML documents

This section contains the following topics:

- [Accessing the Data Load/Unload Page](#)
- [Loading Data](#)
- [Unloading Data](#)
- [Using Text Data Load Repository](#)

Accessing the Data Load/Unload Page

To access the Data Load/Unload page:

1. On the Workspace home page, click the **Utilities** icon.
2. Click **Data Load/Unload**.

The Data Load/Unload page appears.

3. Click the appropriate icon to load data, unload data, or view the repository.

Loading Data

You can load data into the Oracle Application Express database in the following ways:

- Copy and paste data from a spreadsheet.
- Upload a spreadsheet file in a delimited format (such as comma-delimited (.csv) or tab-delimited).
- Upload a text file containing comma-delimited or tab-delimited data.

Topics in this section include:

- [Loading a Text File](#)
- [Loading an XML Document](#)
- [Loading Spreadsheet Data](#)

See Also: ["Choosing the Right Import/Export/Load/Unload Option"](#) on page 4-2

Loading a Text File

You can copy and paste tab-delimited data directly into the Load Data Wizard.

To load a text file:

1. On the Workspace home page, click the **Utilities** icon.
2. Click **Data Load/Unload**.
3. Click **Load**.
4. Click **Load Text Data**.

The Load Data Wizard appears.

5. Under Load To, select either **Existing table** or **New table**.
6. Under Load From, select either **Upload file** or **Copy and paste**.

7. Follow the on-screen instructions.

Loading Spreadsheet Data

You can load spreadsheet data by either copying and pasting text, or by loading a file.

To load spreadsheet data:

1. On the Workspace home page, click the **Utilities** icon.
2. Click **Data Load/Unload**.
3. Click **Load**.
4. Click **Load Spreadsheet Data**.
The Load Data Wizard appears.
5. Under Load To, select either **Existing table** or **New table**.
6. Under Load From, select either **Upload file** or **Copy and paste**.
7. Follow the on-screen instructions.

Loading an XML Document

Oracle Application Express supports XML documents in Oracle's canonical XML format.

In Oracle's canonical XML format, each element represents a column value, each element is named after the column, all elements that are part of the same row are children of a <ROW> element, and all <ROW> elements are children of a <ROWSET> element.

To load an XML document:

1. On the Workspace home page, click the **Utilities** icon.
2. Click **Data Load/Unload**.
3. Click **Load**.
4. Click **Load XML Data**.
The Load XML Data Wizard appears.
5. Follow the on-screen instructions.

Unloading Data

You can use the Unload page to export the contents of a table to a text file or XML document.

Topics in this section include:

- [Unloading a Text File](#)
- [Unloading to an XML Document](#)

See Also: "[Choosing the Right Import/Export/Load/Unload Option](#)" on page 4-2

Unloading a Text File

Use the Unload to Text Wizard to export the contents of a table to a text file. For example, you could export an entire table to a comma-delimited file (.csv).

To unload a table to a text file:

1. On the Workspace home page, click the **Utilities** icon.
2. Click **Data Load/Unload**.
3. Click **Unload**.
4. Click **Unload To Text**.

The Unload to Text Wizard appears.

5. Follow the on-screen instructions.

You select the schema and choose the table and columns to be exported. Additionally, you can specify the type of separator to be used to separate column values and also whether column text strings are identified using single or double quotation marks.

Unloading to an XML Document

Use the Unload to XML Wizard to export the contents of a table to an XML document adhering to the Canonical XML specification.

To unload a table to an XML document:

1. On the Workspace home page, click the **Utilities** icon.
2. Click **Data Load/Unload**.
3. Click **Unload**.
4. Click **Unload to XML**.

The Unload to XML Wizard appears.

5. Follow the on-screen instructions.

You select the schema and choose the table and columns to be exported.

Using Text Data Load Repository

Loaded text data files are stored in the Text Data Load Repository.

To access the Text Data Load Repository:

1. On the Workspace home page, click the **Utilities** icon.
2. Click **Data Load/Unload**.
3. Click **Repository**.
4. To filter the display, make a selection from the Show list and click **Go**.
5. To view information about a specific file, click the **View** icon.
6. To delete an imported file, select it and click **Delete Checked**.

Generating DDL

With Oracle Application Express, you can generate data definition language statements from the Oracle data dictionary. These scripts can be used to create or re-create database schema objects. The scripts can be generated to display inline or saved as a script file. You can generate the create scripts for all objects for a specific schema, specific object types, or specific objects.

If you run Oracle Application Express with Oracle Database 10g release 1 (10.1) or later, you can generate data definition language statements from the Oracle data

dictionary. These scripts can be used to create or re-create database schema objects. The scripts can be generated to the screen, or they can be saved as a SQL Script. You can generate the create scripts for all objects for a specific schema, specific object types, or specific objects.

To generate a DDL statement:

1. On the Workspace home page, click the **Utilities** icon.
2. Click **Generate DDL**.
The Generate DDL page appears.
3. Click **Create Script**.
The Generate DDL Wizard appears.
4. Select a database schema and click **Next**.
5. Define the object type:
 - a. Output - Specify an output format. Select either **Display Inline** or **Save As Script File**.
 - b. Check All - Select this option to include all object types for which to generate DDL.
 - c. Object Type - Select the object types for which to generate DDL.
 - d. To select object names for the selected object types, click **Next** and follow the on-screen instructions.
6. Click **Generate DDL**.

See Also:

- *Oracle Database SQL Language Reference* for information about DDL statements
- "The Data Dictionary" in *Oracle Database Concepts* for information about the data dictionary

Viewing Object Reports

Utilities includes a variety of object reports to help you better manage the objects in your database.

Topics in this section include:

- [Table Reports](#)
- [Security Reports](#)
- [PL/SQL Reports](#)
- [Exception Reports](#)
- [All Object Reports](#)

Table Reports

Use the Table reports to view specific details about the tables within your database.

To view the Table reports:

1. On the Workspace home page, click the **Utilities** icon.

2. Click **Object Reports**.
The Object Reports page appears.
3. In the Table Reports section, select the report you want to view:
 - Table Columns
 - Table Comments
 - Table Constraints
 - Table Statistics
 - Table Storage Sizes
4. To filter a report, enter search criteria in the fields provided or make selections from the lists, and click **Go**.
5. To view reports for a different schema, select the schema from the Schema list on the upper right side of the page.

Security Reports

Use the Security reports to view object or column privileges granted on database objects owned by other schemas. You can also use these reports to view database role and system privileges.

To view the Security reports:

1. On the Workspace home page, click the **Utilities** icon.
2. Click **Object Reports**.
The Object Reports page appears.
3. In the Security Reports section, click the report you want to view:
 - **Object Grants** - View the privileges for an existing schema and also understand what privileges have been granted from the selected schema to other schemas.
 - **Column Privileges** - View the privileges for an existing schema and also understand what privileges have been granted from the selected schema to other schemas.
 - **Role Privileges** - View the database roles that have been granted to a selected schema. Roles are collections of various privileges.
 - **System Privileges** - View the database privileges that have been granted to a selected schema.
4. If available, you can filter the report by making a selection from the Show list and clicking **Go**.
5. To view reports for a different schema, select the schema from the Schema list on the upper right side of the page.

PL/SQL Reports

Use the PL/SQL reports to view program unit arguments or unit line counts and also to search PL/SQL source code.

Topics in this section include:

- [Program Unit Arguments](#)

- [Unit Line Counts](#)
- [Search PL/SQL Source Code](#)

Program Unit Arguments

Use the Program Unit Arguments report to view package input and output parameters.

To view the PL/SQL Unit Arguments report:

1. On the Workspace home page, click the **Utilities** icon.
2. Click **Object Reports**.
The Object Reports page appears.
3. In the PL/SQL Reports section, click **Program Unit Arguments**.
4. To filter the report, enter a query in PL/SQL Package or Program Unit and click **Go**.
5. To view reports for a different schema, select the schema from the Schema list on the upper right side of the page.

Unit Line Counts

Use the Unit Line Counts report to view the number of lines of code for each object. Use this report to identify larger PL/SQL program units.

To view the Unit Line Counts report:

1. On the Workspace home page, click the **Utilities** icon.
2. Click **Object Reports**.
The Object Reports page appears.
3. In the PL/SQL Reports section, click **Unit Line Counts**.
4. To filter the report, enter an object name and click **Go**.

Search PL/SQL Source Code

Use the Search PL/SQL Source code page to search the text within your PL/SQL code. Use this report to find references to tables or functions you might be thinking of deleting. You can also use this page to locate code when you can only recall a code snippet.

To search for PL/SQL source code:

1. On the Workspace home page, click the **Utilities** icon.
2. Click **Object Reports**.
The Object Reports page appears.
3. In the PL/SQL Reports section, click **Search PL/SQL Source Code**.
4. To filter the report:
 - a. In Object Name, enter a query.
 - b. In Text, enter the PL/SQL code you want to search for.
 - c. In From/To Line, enter the range of lines you want to search.
 - d. Click **Go**.

5. To view reports for a different schema, select the schema from the Schema list on the upper right side of the page.

Exception Reports

Use the Exception Reports to view unindexed foreign keys and tables without primary keys, indexes, or triggers.

To view Exception reports:

1. On the Workspace home page, click the **Utilities** icon.
2. Click **Object Reports**.
The Object Reports page appears.
3. In the Exception Reports section, click the report you want to view.
 - Tables without Primary Keys
 - Tables without Indexes
 - Unindexed Foreign Keys
 - Tables without Triggers
4. To filter the report, enter a table name and click **Go**.

All Object Reports

Use the All Object reports to view objects for the selected schema.

To view the All Object reports:

1. On the Workspace home page, click the **Utilities** icon.
2. Click **Object Reports**.
The Object Reports page appears.
3. In the All Object Reports section, select the report you want to view:
 - **All Objects** - Sort objects by creation date and also last DDL (data definition language).
 - **Invalid Objects** - View all invalid objects in the database by object type.
 - **Object Creation Calendar** - View all objects in a calendar format based on the date each database object was created.
 - **Object Counts by Type** - View the number of database objects by type for the selected schema.
 - **Data Dictionary** - View the data dictionary for this database.

An Oracle data dictionary is a set of tables and views used as a read-only reference about the database. For example, a data dictionary stores information about both the logical and physical structure of the database.

A data dictionary also stores information about valid Oracle database users, integrity constraints for tables in the database, and the amount of space allocated for a schema object and the amount being used.
4. For All Objects and Invalid Objects reports, you can filter the report:
 - a. Select an object type.
 - b. Enter an object name.

- c. Click **Go**.
5. For the Data Dictionary report, you can query for details about database objects:
 - a. Click the Data Dictionary View Name.
The Data Dictionary Browser appears. Use this page to query the Oracle Data Dictionary for details about database objects.
 - b. On the Data Dictionary Browser page, select the specific columns you want to see data for or **Check All**.
 - c. Click **Query**.
A report appears.
 - d. To begin a new query on the same data dictionary view, click **New Query**.
 - e. To browse another data dictionary view, click **Browse Another View**.

See Also: *Oracle Database Concepts* for information about the data dictionary

Using the Recycle Bin to View and Restore Dropped Objects

You can use the Recycle Bin to view and restore dropped database objects. When you drop a table, the space associated with the table is not immediately removed. The Oracle database renames the table and places it and any associated objects in the Recycle Bin. You can recover objects in the Recycle Bin at a later time.

This section contains the following topics:

- [Managing Objects in the Recycle Bin](#)
- [Emptying the Recycle Bin Without Viewing the Objects](#)

Note: The Recycle Bin feature is only available if you run with an Oracle 10g or later database.

See Also: "Backing Up and Recovering the Database" in *Oracle Database Express Edition 2 Day DBA*

Managing Objects in the Recycle Bin

You can view objects in the Recycle Bin on the Dropped Objects page. Once you select an object and view the Object Details page, you can choose to purge the object or restore the object by clicking the appropriate button.

To view objects in the Recycle Bin:

1. On the Workspace home page, click the **Utilities** icon.
2. Click **Recycle Bin** and then **Dropped Objects**.
The Dropped Objects page appears.
3. To filter the report, select an object type, enter the object name in the Original Name field, and click **Go**.
4. To view object details, click the object name.
The Object Details page appears.
5. To restore the current object, click **Restore Object**.

6. To permanently delete the current object, click **Purge Object**.

Emptying the Recycle Bin Without Viewing the Objects

To empty the Recycle Bin without viewing the objects:

1. On the Workspace home page, click the **Utilities** icon.
2. Click **Recycle Bin**.
3. Click **Purge Recycle Bin**.

The Purge Recycle Bin page appears.

4. Confirm your request by clicking **Purge Recycle Bin** again.

Reviewing Application Express Views

You can review Application Express views and also run queries within a view to find specific information.

To review Application Express views:

1. On the Workspace home page, click the **Utilities** icon.
2. Click **APEX Views**.

The Application Express Views page appears.

3. To change the appearance of the page, make a selection from the View list and click **Go**:

- **Icons** (the default) displays each Application Express view as a large icon.
- **Tree** displays each Application Express view in a hierarchy.
- **Report** displays each view as a line in a report.

4. Click the view you want to review or query.

The Application Express View Details page appears.

5. To run a query:

- a. Under Query Columns, select the columns to query.

For a description of each column, read the information in the Description section on this page.

- b. (Optional) Under Query Conditions, specify the column, condition, and value for the query.
- c. Scroll to the top and click **Go**.
- d. Scroll down to the Data section to view the results of the query. Note that the SQL Query section shows the SQL query resulting from your selections.

Comparing Schemas

You can run a report that compares database objects in two schemas, displaying differences between them. You can compare all objects in the schemas or limit your report to specific objects. To compare two schemas, both must be available to your workspace.

Examples:

- Compare `DEMO_` objects by searching for that naming convention. The report indicates if the object exists in each of the two schemas.
- Analyze the object details in the two schemas to determine why one implementation is different. For example, the report might show that an index in one schema has an additional column or a column with a different data type.

To compare schemas:

1. On the Workspace home page, click the **Utilities** icon.
2. Click **Schema Comparison**.
3. On the Schema Comparison page, make the appropriate selections to run the comparison:
 - Schema 1 and Schema 2 - Select the schemas to compare.
 - Compare - Restrict the report to show one object type or select **All** to show all database objects.
 - Search - Enter a case insensitive query for the object name.
 - Display - To change the number of rows that appear in the report, make a selection from the Display list.
 - Go - Click **Go** to find the results matching your selections.
 - Show Differences Only or Show Details - Select the type of information you want to review.

Monitoring the Database

The reports available on the Database Monitor page provide a database-wide view of the database sessions, system statistics, SQL statements, and longer operations. You can use these reports to identify poorly performing SQL and to better understand the workload of the database.

To access any of the icons on the Database Monitor page, you must have an account that has been granted an administrator role.

This section contains the following topics:

- [Sessions](#)
- [About System Statistics](#)
- [About Top SQL](#)
- [About Long Operations](#)

Sessions

A session is the connection of a user to an Oracle database instance. A session lasts from the time the user connects until the time the user disconnects or exits the database application.

You must have database administrator privileges to access the Sessions page.

To access reports on the Sessions page:

1. On the Workspace home page, click the **Utilities** icon and then **Database Monitor**.
2. Click **Sessions**.

3. If prompted, enter the appropriate administrator user name and password and click **Login**.

The Sessions page appears.

4. To view a report, select one of the following tabs at the top of the page:
 - Sessions
 - Locks
 - Waits
 - I/O
 - SQL
 - Open Cursors

The sections that follow describe each report.

Sessions Report

The Sessions Report displays information about the current sessions in the database. Use the controls at the top of page to narrow the view:

- **Search.** Enter search criteria and click **Go**. For search details, click the Search label.
- **Status.** Select a status and click **Go**.
- **Show.** Select how many columns to display and click **Go**.
- **Display.** Select the number of rows to appear in the report and click **Go**.

To view session details, click the Session ID (SID). The Session Details page appears. To remove the current session, navigate to the Session Details page and click **Kill Session**.

Locks Report

The Locks report displays a report of sessions which have locks that are blocking other session(s). To control the number of rows that appear, make a selection from the Display list and click **Go**.

Waits Report

The Waits report displays the wait events for each session. Use the controls at the top of page to narrow the view:

- **Search.** Enter search criteria and click **Go**. For search details, click the Search label.
- **Status.** Select a status and click **Go**.
- **Show.** Select how many columns to display and click **Go**.
- **Display.** Select the number of rows to appear in the report and click **Go**.

To view session details, click the Session ID (SID). The Session Details page appears. To remove the current session, click **Kill Session**.

I/O Report

The I/O report displays details about the I/O for each session. Use the controls at the top of page to narrow the view:

- **Search.** Enter search criteria and click **Go**. For search details, click the Search label.
- **Display.** Select the number of rows to appear in the report and click **Go**.

To view session details, click the Session ID (SID). The Session Details page appears.
To remove the current session, click **Kill Session**.

SQL Report

The SQL report displays details about the current or last SQL statement executed for each session. Use the controls at the top of page to narrow the view:

- **Search.** Enter search criteria and click **Go**. For search details, click the Search label.
- **Status.** Select a status and click **Go**.
- **Show.** Select how many columns to display and click **Go**.
- **Display.** Select the number of rows to appear in the report and click **Go**.

To view session details, click the Session ID (SID). The Session Details page appears.
To remove the current session, click **Kill Session**.

Open Cursors

The Open Cursors report displays details about the number of open cursors for each session. Use the controls at the top of page to narrow the view:

- **Search.** Enter search criteria and click **Go**. For search details, click the Search label.
- **Status.** Select a status and click **Go**.
- **Display.** Select the number of rows to appear in the report and click **Go**.

To view details about a specific open cursor count, click the numeric link under the Open Cursor Count column.

To view session details, click the Session ID (SID). The Session Details page appears.
To remove the current session, click **Kill Session**.

About System Statistics

The System Statistics page displays statistics for:

- **Physical I/O.** A physical I/O is an I/O that requires disk access. This report displays disk access statistics for physical reads and writes.
- **Logical I/O.** An logical I/O is an I/O that is satisfied in memory or disk. Displays the sum of buffer reads which might be consistent gets or current mode gets. Redo is the buffer in the SGA that contains information about changes.
- **Memory Statistics.** Displays memory consumption of the database.
- **Time Statistics.** Shows various times consumed by the database.
- **SQL Cursor Statistics.** Displays statistics about the cursors in the Oracle database.
- **Transaction Statistics.** Shows the number of transactions performed.

To view the System Statistics page:

1. On the Workspace home page, click the **Utilities** icon and then **Database Monitor**.
2. Click **System Statistics**.
3. If prompted, enter the appropriate administrator user name and password and click **Login**.

The System Statistics page appears.

Additional controls on the System Statistics page include:

- **Refresh Report** - Refresh the System Statistics report.
- **Save Statistics** - Save the current report.
- **Show delta between current and saved values** - Click this check box to display actual statistic values, or display deltas between an saved value and the current value.

See Also: "Memory Configuration and Use" in *Oracle Database Performance Tuning Guide*

About Top SQL

The "top" SQL statements represent the SQL statements that are executed most often, that use more system resources than other SQL statements, or that use system resources more frequently than other SQL statements.

Use the Top SQL page to identify poorly performing SQL.

To view the Top SQL page:

1. On the Workspace home page, click the **Utilities** icon and then **Database Monitor**.
2. Click **Top SQL**.
3. If prompted, enter the appropriate administrator user name and password and click **Login**.

The Top SQL page appears. Use the search fields and lists and the top of the page and click Go to narrow the display. For details on each field or list, click the Search label.

4. To access the SQL Plan page, click the **View** icon.



The SQL Plan page appears, containing the following sections:

- **Query Plan** - Contains a color coded explain plan. Note that unindexed columns display in red.
- **SQL Text** - Displays the full text of the SQL statement.
- **Indexes** - Displays all indexes on the table in the query. There is a checkmark when that index is used in the query.
- **Table Columns** - Shows all columns on all tables or views in the query.

About Long Operations

The Long Operations page displays the status of various operations that run for longer than 6 seconds (in absolute time). These operations currently include many backup and recovery functions, statistics gathering, and query execution, and more operations are added for every Oracle release.

To view the Long Operations page:

1. On the Workspace home page, click the **Utilities** icon and then **Database Monitor**.
2. Click **Long Operations**.
3. If prompted, enter the appropriate administrator user name and password and click **Login**.

See Also: "V\$SESSION_LONGOPS" in *Oracle Database Reference*

Viewing Database Details

You can view details about your database on the About Database page.

To access details about your database:

1. On the Workspace home page, click the **Utilities** icon and then **Database Monitor**.
2. Click **About Database**.
3. If prompted, enter the appropriate administrator user name and password and click **Login**.

The About Database page appears. The About Database page is divided into two sections: Database and Version.

4. To view additional information about installed options, currently used features, or National Language Support, select one of the following check boxes and click **Go**:
 - Version
 - Settings
 - Options
 - National Language Support
 - CGI Environment
 - Parameters

Building Queries with Query Builder

Query Builder's graphical user interface enables database developers to build SQL queries without the need for manual SQL coding. Using Query Builder, you can search and filter database objects, select objects and columns, create relationships between objects, view formatted query results, and save queries with little or no SQL knowledge.

This section contains the following topics:


- [About Query Builder](#)
- [Using the Object Selection Pane](#)
- [Selecting Objects](#)
- [Specifying Query Conditions](#)
- [Creating Relationships Between Objects](#)
- [Working with Saved Queries](#)
- [Viewing Generated SQL](#)
- [Viewing Query Results](#)

See Also: "Using the Query Finder" in *Oracle Application Express Application Builder User's Guide*

About Query Builder

The Query Builder page is divided into three sections:

- **Object Selection pane** displays on the left side of the page and contains a list of objects from which you can build queries. Only objects in the current schema are displayed.
- **Design pane** displays to the right of the Object Selection pane and above the Conditions, SQL, Results, and Saved SQL tabs. When you select an object from the Object Selection pane, it appears in the Design pane.
- **Output pane** displays below the Design pane. Once you select objects and columns, you can create conditions, view the generated SQL, or view query results.

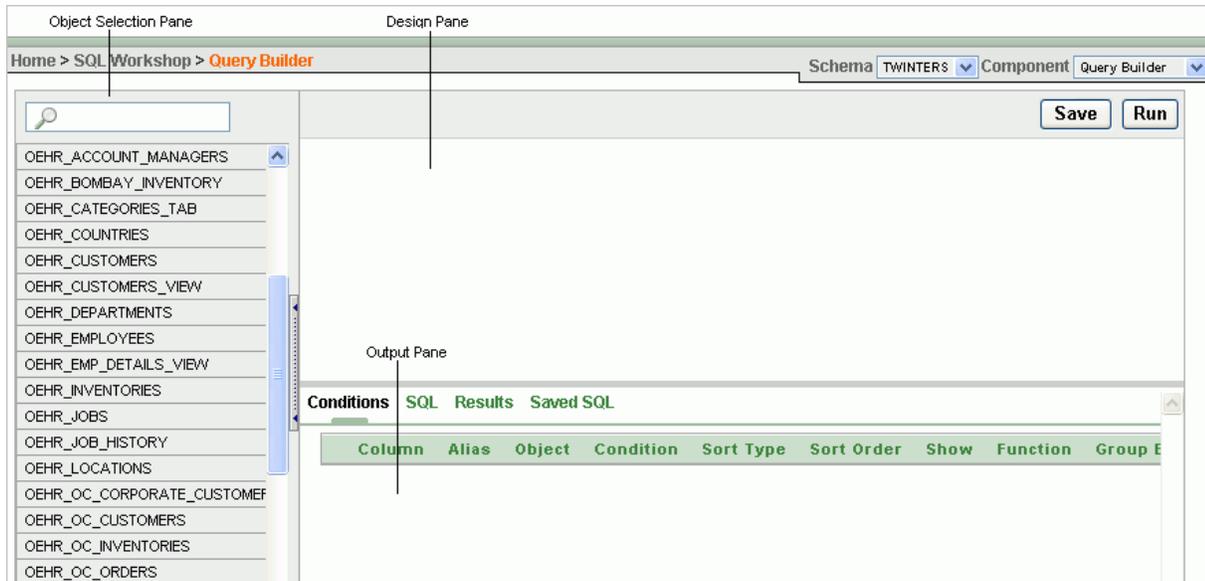

Selecting a Schema

A schema is a logical container for database objects. To access objects in another schema, make a selection from the Schema list in the upper right side of the page.

Switching to Another SQL Workshop Component

You can navigate to another SQL Workshop component by selecting a component from the Component list located on the upper right side of the page:

- **Object Browser.** See "[Managing Database Objects with Object Browser](#)" on page 1-1.
- **SQL Commands.** See "[Using SQL Commands](#)" on page 3-1.
- **SQL Scripts.** See "[Using SQL Scripts](#)" on page 2-1.
- **Query Builder.** See "[Building Queries with Query Builder](#)" on page 5-1.

Topics in this section include:

- [Accessing Query Builder](#)
- [Understanding the Query Building Process](#)

Accessing Query Builder

To access Query Builder:

1. Log in to the Workspace home page.
2. Click **SQL Workshop**.
3. To view Query Builder you can either:
 - Click **SQL Workshop** and then **Query Builder**.
 - Click the down arrow on the right side of the SQL Workshop icon to view a drop down menu. Then select the **Query Builder** menu option.



Note: For the purposes of consistency, this document uses the primary navigation path (or drill-down approach) when explaining navigation.

Understanding the Query Building Process

To build a query in Query Builder, you perform the following steps:

1. Select objects from the Object Selection pane. See ["Using the Object Selection Pane"](#) on page 5-3.
2. Add objects to the Design pane and select columns. See ["Selecting Objects"](#) on page 5-4.
3. **Optional:** Establish relationships between objects. See ["Creating Relationships Between Objects"](#) on page 5-8.
4. **Optional:** Create query conditions. See ["Specifying Query Conditions"](#) on page 5-6.
5. Execute the query and view results. See ["Viewing Query Results"](#) on page 5-11.

See Also: ["Viewing Generated SQL"](#) on page 5-11 and ["Working with Saved Queries"](#) on page 5-10

Using the Object Selection Pane

The Object Selection pane displays on the left side of the Query Builder page and lists tables, views, and materialized views within the current schema.

Topics in this section include:

- [Searching and Filtering Objects](#)
- [Hiding the Object Selection Pane](#)

Searching and Filtering Objects


Use the Object Selection pane to search for and view tables, views, and materialized views within the current schema.

To search or filter objects:

1. On the Workspace home page, click **SQL Workshop** and then **Query Builder**.

Query Builder appears.

2. In the search field at the top of the pane, enter a case insensitive query.
3. To view all tables or views within the currently selected schema, leave the search field blank.

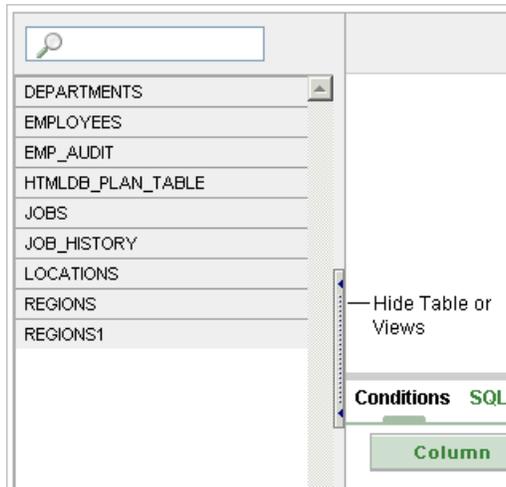

Hiding the Object Selection Pane

You can hide the Object Selection pane by selecting the **Hide Table or Views** control. By hiding the Object Selection pane, you can increase the size of the Design and Result panes.

The Hide Table or Views control displays on the right side of the Object Selection pane. If the Object list appears, selecting this control hides it. Similarly, if the Object list is hidden, selecting this control causes the pane to reappear.

Selecting Objects

The Design pane displays to the right of the Object Selection pane. When you select an object from the Object Selection pane, it appears in the Design pane. You use the Object Selection pane to select objects (that is, tables, views, and materialized views) and the Design pane to identify how those selected objects are used in a query.

Topics in this section include:

- [About Supported Column Types](#)
- [Adding an Object to the Design Pane](#)
- [Removing or Hiding Objects in the Design Pane](#)

See Also: ["Creating Relationships Between Objects"](#) on page 5-8

About Supported Column Types

Columns of all types available in Oracle Database 10g Release (10.2) display as objects in the Design pane. Note the following column restrictions:

- You may only select a maximum of 60 columns for each query.
- The following column types are not selectable and cannot be included in a generated query:

- BLOB
- NCLOB
- RAW
- LONG
- LONG RAW
- XMLType
- Any other nonscalar column types


Adding an Object to the Design Pane

You add an object to the Design pane by selecting it from the Object Selection pane.

To add an object to the Design pane:

1. On the Workspace home page, click **SQL Workshop** and then **Query Builder**. Query Builder appears.
2. Select an object from the Object Selection pane.

The selected object appears in the Design Pane. Note that a graphical representation of the datatype displays to the right of the column name.

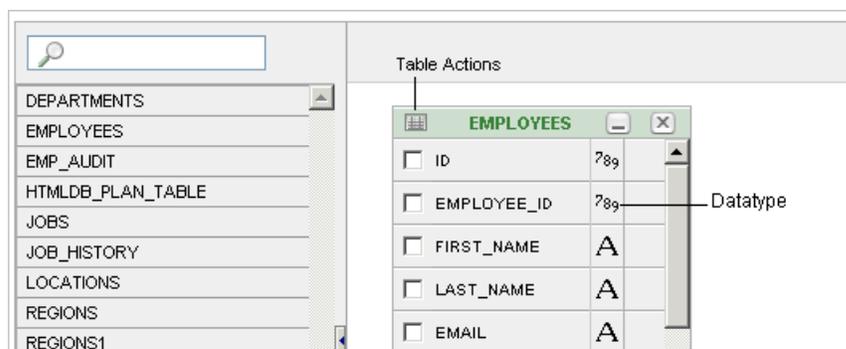

3. Select the columns to be included in your query by clicking the check box to the left of the column name.

When you select a column you are indicating it is included in the query. As you select a column, it appears on the Conditions tab. Note that the Show check box on the Conditions tab controls whether a column is included in query results. By default, this check box is selected.

To select the first twenty columns, click the **Table Actions** icon in the upper left corner of the object. The Actions window appears. Select **Check All**.

4. To execute the query and view results, click **Run**.

Tip: You can also execute a query by pressing **CTRL + ENTER**.

The Results pane displays the query results.


See Also: ["Specifying Query Conditions"](#) on page 5-6

Resizing the Design and Results Panes

As you select objects, you can resize Design and Results panes by selecting the gray horizontal rule in the center of the page. Moving the rule up, shrinks the Design pane. Moving the rule down expands the Design pane.

Removing or Hiding Objects in the Design Pane

You remove or hide objects in the Design pane by selecting controls at the top of the object. To remove an object, select the **Remove** icon in the upper right corner. To temporarily hide the columns within an object, click the **Show/Hide Columns** icon.

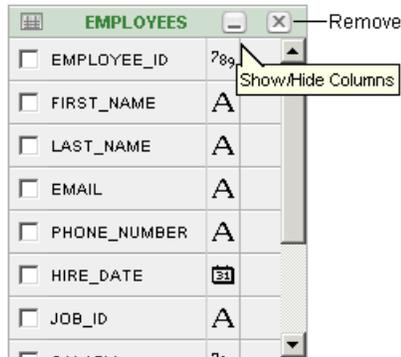

Specifying Query Conditions

Conditions enable you to filter and identify the data you want to work with. As you select columns within an object, you can specify conditions on the Conditions tab. You can use these attributes to modify the column alias, apply column conditions, sort columns, or apply functions.

To specify query conditions:

1. On the Workspace home page, click **SQL Workshop** and then **Query Builder**.
Query Builder appears.
2. Select an object from the Object Selection pane.
The selected object appears in the Design Pane.
3. Select the columns to be included in your query by clicking the box to the left of the column name.

When you select a column, you are indicating you want to include it in your query. As you select each column, it appears as a separate row in the Conditions view. [Table 5-1](#) describes the attributes available on the Conditions tab.

Table 5-1 Conditions Tab

Condition Attribute	Description
Up and Down Arrows	Controls the order that the columns to be displayed in the resulting query. Click the arrow buttons to move columns up and down. See Also: " Viewing Query Results " on page 5-11
Column	Displays the column name.

Table 5–1 (Cont.) Conditions Tab

Condition Attribute	Description
Alias	Specify an optional column alias. An alias is an alternative column name. Aliases are used to make a column name more descriptive, to shorten the column name, or prevent possible ambiguous references.
Condition	Specify a condition for the column. The condition you enter modifies the query's WHERE clause. When specifying a column condition, you must include the appropriate operator and operand. Consider the following examples: <pre>>=10 ='VA' IN (SELECT dept_no FROM dept) BETWEEN SYSDATE AND SYSDATE + 15</pre>
Sort Type	Select a sort type. Options include: <ul style="list-style-type: none"> ■ Ascending (<i>Asc</i>) ■ Descending (<i>Desc</i>)
Sort Order	Enter a number (1, 2, 3, and so on) to specify the order in which selected columns should display.
Show	Select this check box to include the column in your query results. It is not necessary to select Show to add a column to the query for filtering only. For example, suppose you want to create following query: <pre>SELECT ename FROM emp WHERE deptno = 10</pre> To create this query in Query Builder: <ol style="list-style-type: none"> 1. From the Object list, select EMP. 2. In the Design Pane, select ename and deptno. 3. For the deptno column, in Condition enter =10 and uncheck the Show check box.
Function	Select an argument function. Available functions include: <ul style="list-style-type: none"> ■ NUMBER columns - COUNT, COUNT DISTINCT, AVG, MAXIMUM, MINIMUM, SUM ■ VARCHAR2, CHAR columns - COUNT, COUNT DISTINCT, INITCAP, LENGTH, LOWER, LTRIM, RTRIM, TRIM, UPPER ■ DATE, TIMESTAMP columns - COUNT, COUNT DISTINCT
Group By	Specify columns to be used for grouping when an aggregate function is used. Only applicable for columns included in output.
Delete	Deselect the column, excluding it from the query.

As you select columns and define conditions, Query Builder writes the SQL for you.

4. To view the underlying SQL, click the **SQL** tab.

Creating Relationships Between Objects

You can create relationships between objects by creating a join. A **join** identifies a relationship between two or more tables, views, or materialized views.

Topics in this section include:

- [About Join Conditions](#)
- [Joining Objects Manually](#)
- [Joining Objects Automatically](#)

About Join Conditions

When you write a join query, you specify a condition that conveys a relationship between two objects. This condition is called a **join condition**. A join condition determines how the rows from one object combine with the rows from another object.

Query Builder supports inner, outer, left, and right joins. An **inner join** (also called a **simple join**) returns the rows that satisfy the join condition. An outer join extends the result of a simple join. An **outer join** returns all rows that satisfy the join condition and returns some or all of those rows from one table for which no rows from the other satisfy the join condition.

See Also: *Oracle Database SQL Language Reference* for information about join conditions

Joining Objects Manually

You can create a join manually by selecting the Join column in the Design pane.

To join two objects manually:

1. On the Workspace home page, click **SQL Workshop** and then **Query Builder**.

Query Builder appears.

2. From the Object Selection pane, select the objects you want to join.

The objects display in the Design pane.

3. Identify the columns you want to join.

You create a join by selecting the Join column adjacent to the column name. The Join column displays to the right of the datatype, beneath the Remove icon. When your cursor is in the appropriate position, the following help tip displays:


Click here to select column for join

4. Select the appropriate Join column for the first object.

When selected, the Join column displays as a dark gray. To deselect a Join column, simply select it again or press **ESC**.

5. Select the appropriate Join column for the second object.

Tip: You can also join two objects by dragging and dropping. Select a column in the first table and then drag and drop it onto a column in another table.

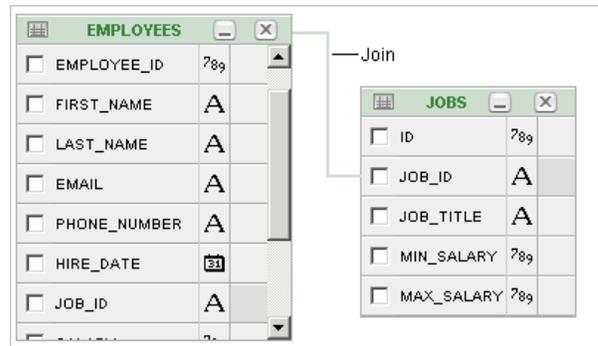

When joined, a green line connects the two columns.

6. Select the columns to be included in your query. You can view the SQL statement resulting from the join by positioning the cursor over the green line.
7. Click **Run** to execute the query.
The Results pane displays the query results.

Joining Objects Automatically

When you join objects automatically, the Query Builder suggests logical, existing parent and child relationships between existing columns.

To join objects automatically:

1. On the Workspace home page, click **SQL Workshop** and then **Query Builder**.
Query Builder appears.
2. From the Object Selection pane, select an object.
The object displays in the Design pane.
3. Click the small icon in the upper left corner of the object. Depending upon the selected object, the icon label displays as **Table Actions** or **View Actions**.
The Actions window appears. Use the Actions window to select all columns within the current object or objects related to the current object.
4. In the Actions window, select the appropriate options:
 - **Check All** - Select this option to select the first twenty columns in the current object.
 - **Add Parent** - Displays tables that are referenced as a foreign key to the current object.
 - **Add Child** - Displays tables that reference the current object in a foreign key.

If using Add Parent or Add child, the selected object appears and a green line connects the foreign key columns.
5. Select additional columns to be included in your query.
You can view the SQL statement resulting from the join by positioning the cursor over the green line.
6. Click **Run** to execute the query.
The Results pane displays the query results.

Working with Saved Queries

As you create queries, you can save them by clicking the Save button in the Design pane. Once you save a query, you can access it later in the Saved SQL view.

Topics in this section include:

- [Saving a Query](#)
- [Editing a Saved Query](#)
- [Deleting a Saved Query](#)

Saving a Query

To save a query:

1. Build a query:
 - a. On the Workspace home page, click **SQL Workshop** and then **Query Builder**. Query Builder appears.
 - b. Select objects from the Object Selection pane.
 - c. Add objects to the Design pane and select columns.
 - d. Execute the query.
2. Click **Save**.
3. Enter a name and description and click **Save**.

The saved query displays in the Saved SQL view.

The screenshot shows the Oracle SQL Workshop Query Builder interface. At the top right, there are 'Save' and 'Run' buttons. The design pane is divided into two sections: 'EMPLOYEES' and 'JOBS'. The 'EMPLOYEES' section has checkboxes for EMPLOYEE_ID, FIRST_NAME, LAST_NAME, EMAIL, PHONE_NUMBER, HIRE_DATE, and JOB_ID. The 'JOBS' section has checkboxes for ID, JOB_ID, JOB_TITLE, MIN_SALARY, and MAX_SALARY. Below the design pane, there are tabs for 'Conditions', 'SQL', 'Results', and 'Saved SQL'. The 'Saved SQL' tab is active, showing a table with columns: Owner, Name, Description, Updated By, and Last Updated. The table contains one row: HR, Employees, -, HR, 0 seconds ago. At the bottom of the table, it says 'row(s) 1 - 1 of 1'.

Note that Query Builder does not support duplicate query names. If you open an existing query, keep the existing name, and save it again, Query Builder over-writes the existing query. If you change the name of an existing query and save it again, Query Builder saves the query again under the new name.

Editing a Saved Query

Once you save a query, you can access it in the Saved SQL view.

To edit a Saved SQL query:

1. On the Workspace home page, click **SQL Workshop** and then **Query Builder**.
Query Builder appears.
2. Select the **Saved SQL** tab.
3. To filter the display, you can:
 - Make a selection from the Owner list and click **Go**.
 - Enter a search query in the Name field and click **Go**.
4. To edit a query, select the appropriate name.

The saved query appears. The selected objects display in the Design pane and the Conditions view appears.

Deleting a Saved Query

To delete a Saved SQL query:

1. On the Workspace home page, click **SQL Workshop** and then **Query Builder**.
Query Builder appears.
2. Select the **Saved SQL** tab.
3. Select the queries to be deleted and click **Delete Checked**.

Viewing Generated SQL

The SQL view presents a read-only, formatted representation of the SQL generated by Query Builder. You can copy the SQL code that appears in the SQL View for use in other tools such as SQL Command Processor or Application Builder.

See Also: ["Using SQL Commands"](#) on page 3-1

To access the SQL view:

1. On the Workspace home page, click **SQL Workshop** and then **Query Builder**.
Query Builder appears.
2. Select an object from the Object Selection pane.
The selected object appears in the Design Pane.
3. Select the columns to be included in your query.
4. Click the **SQL** tab.

The SQL code generated by Query Builder appears.

Viewing Query Results

Once you select objects and determine what columns to include in your query, you execute a query by:

- Clicking the **Run** button (or pressing **CTRL + ENTER**)

- Selecting the **Results** tab

The Results view appears, displaying formatted query results. To export the report as a comma-delimited file (.csv) file, click the Download link at the bottom of the page.

EMPLOYEE_ID	FIRST_NAME	LAST_NAME	EMAIL	HIRE_DATE	JOB_ID	JOB_ID	JOB_TITLE
100	Steven	King	SKING	17-JUN-87	AD_PRES	AD_PRES	President
101	Neena	Kochhar	NKOCHHAR	21-SEP-89	AD_VP	AD_VP	Administration Vice President
102	Lex	De Haan	LDEHAAN	13-JAN-93	AD_VP	AD_VP	Administration Vice President
103	Alexander	Hunold	AHUNOLD	03-JAN-90	IT_PROG	IT_PROG	Programmer
104	Bruce	Ernst	BERNST	21-MAY-91	IT_PROG	IT_PROG	Programmer
105	David	Austin	DAUSTIN	25-JUN-97	IT_PROG	IT_PROG	Programmer
106	Valli	Pataballa	VPATABAL	05-FEB-98	IT_PROG	IT_PROG	Programmer

Index

C

command termination
 in SQL Commands, 3-6
Create Lookup Table, 1-10

D

data
 exporting from database, 4-5
 loading, 4-3
 loading into database, 4-4
 unloading, 4-3, 4-5
data dictionary
 browsing, 4-10
database
 loading data into, 4-3
 monitoring, 4-13
 unloading data from, 4-3
database definition language
 generating DDL statements, 4-6
database link
 browsing, 1-29
 creating, 1-29
 testing, 1-30
Database Monitor
 I/O, 4-14
 Locks, 4-14
 Long Operations, 4-16
 Open Cursors, 4-15
 Sessions, 4-13, 4-14
 SQL, 4-15
 Top SQL, 4-16
 Waits, 4-14
database monitoring
 system statistics, 4-15
database objects
 purging, 4-11
 restoring, 4-11
database security
 Column Privileges report, 4-8
 Role Privileges report, 4-8
 System Privileges report, 4-8
DDL
 generating, 4-6

E

Excel
 importing, 4-5
Explain Plan
 using, 3-10, 3-11
Export XML Wizard, 4-6
exporting data
 summary of available methods, 4-2

F

function
 browsing, 1-24
 compiling, 1-25
 creating, 1-24
 downloading, 1-26
 dropping, 1-26
 editing, 1-25

I

imported text data
 viewing, 4-6
importing data
 summary of available methods, 4-2
index
 browsing, 1-14
 creating, 1-13
 disabling, 1-14
 dropping, 1-14
 rebuilding, 1-14
 statistics about, 1-14
I/O report, 4-14

L

Load Data Wizard, 4-4
Load XML Wizard, 4-5
loaded text data
 deleting, 4-6
Locks report, 4-14

M

materialized view
 browsing, 1-31

- creating, 1-30
- dependent objects, 1-32
- dropping, 1-32
- list of grants, 1-32
- report of data, 1-32
- sort by column, 1-32
- viewing object details, 1-32

O

Object Browser

- about, 1-1
- accessing, 1-2
- creating objects, 1-5
- Detail pane, 1-1
- Hide Objects control, 1-4
- hiding Object Selection pane, 1-4
- managing database links, 1-29
- managing functions, 1-23
- managing indexes, 1-13
- managing materialized views, 1-30
- managing packages, 1-17
- managing procedures, 1-21
- managing sequences, 1-15
- managing tables, 1-5
- managing triggers, 1-26
- managing types, 1-16
- managing views, 1-10
- Object Selection pane, 1-1
- searching for objects, 1-3
- synonyms, 1-32

Object Reports

- All Objects, 4-10
- All Objects report, 4-10
- Column Privileges report, 4-8
- Data Dictionary, 4-10
- Exception Reports, 4-10
- Invalid Objects, 4-10
- Object Calendar, 4-10
- Object Counts by Type, 4-10
- PL/SQL Source Code report, 4-9
- Program Unit Arguments report, 4-9
- Role Privileges report, 4-8
- System Privileges report, 4-8
- Unit Line Counts report, 4-9

objects

- purging, 4-11
- restoring, 4-11

Open Cursors report, 4-15

Oracle Optimizer

- Explain Plan, 3-10, 3-11

P

package

- compiling, 1-20
- creating, 1-18
- downloading, 1-19, 1-20
- dropping, 1-20
- editing, 1-19

- finding, 1-19
- grants for, 1-19
- object dependencies, 1-19
- package body, 1-19
- related errors, 1-19
- viewing, 1-18

procedure

- browsing, 1-22
- compiling, 1-23
- creating, 1-21
- downloading, 1-23
- dropping, 1-23
- editing, 1-22
- editing manually, 1-22
- finding, 1-22

Q

Query Builder, 5-1

- about, 5-1
- accessing, 5-2
- Conditions tab, 5-6
- creating joins automatically, 5-9
- creating joins manually, 5-8
- creating relationships between objects, 5-8
- filtering objects, 5-3
- hiding objects in Design Pane, 5-6
- Object Selection pane, 5-3, 5-4
- removing objects in Design Pane, 5-6
- resizing panes, 5-6
- Results tab, 5-11
- Saved SQL tab, 5-11
- saving queries, 5-10
- searching for objects, 5-3
- specifying query conditions, 5-6
- supported column types, 5-4
- Table Actions, 5-9
- View Actions, 5-9
- viewing generated SQL, 5-11
- viewing query results, 5-11

R

Recycle Bin

- purging, 4-11
- searching, 4-11
- using, 4-11
- viewing objects, 4-11

reports

- Data Dictionary, 4-10
- database objects, 4-10
- exception reports, 4-10
- PL/SQL Source Code, 4-9
- Program Unit Arguments, 4-9
- Unit Line Counts report, 4-9

- results, 2-3

S

scripts

- creating in editor, 2-4

- deleting from editor, 2-8
- deleting from SQL Scripts page, 2-7
- executing, 2-8
- executing from SQL Scripts page, 2-9
- executing in editor, 2-8
- export, 2-3
- exporting, 2-12
- importing, 2-12
- results, 2-3
- SQL Script editor, 2-5
- uploading to another account, 2-4
- uploading to SQL Scripts, 2-4
- viewing repository quotas, 2-15
- Security reports
 - Column Privileges report, 4-8
- sequence
 - altering, 1-15
 - browsing, 1-15
 - creating, 1-15
 - dependent objects, 1-15
 - dropping, 1-16
 - grants associated with, 1-15
- session
 - killing, 4-14
- Session report, 4-14
- spreadsheets
 - importing, 4-5
- SQL Commands
 - command termination, 3-6
 - Explain Plan, running, 3-10, 3-11
 - home page, 3-2
 - transaction support, 3-5
- SQL report, 4-15
- SQL Scripts
 - accessing, 2-1
 - creating script in editor, 2-4
 - deleting script from editor, 2-8
 - deleting script from SQL Scripts home page, 2-7
 - executing script from SQL Scripts page, 2-9
 - executing script in editor, 2-8
 - exporting scripts, 2-12
 - importing scripts, 2-12
 - script editor, 2-5
 - SQL Scripts page, 2-2
 - uploading script, 2-4
 - viewing quotas, 2-15
 - viewing script results, 2-10
- SQL Scripts page
 - accessing Manage Script Results, 2-3
 - Show Quotas, 2-3
 - Task list, 2-3
- SQL Scripts page Task list
 - export scripts, 2-3
 - uploading scripts, 2-4
- SQL*Plus command support, 3-5
- SQL*Plus commands
 - unsupported, 3-5
- synonym
 - creating, 1-32
 - dropping, 1-33

- viewing, 1-33

T

- tab-delimited file
 - loading, 4-4
- tables
 - add column, 1-10
 - browsing, 1-8
 - constraints, 1-9
 - copy, 1-10
 - creating, 1-6
 - drop column, 1-10
 - dropping, 1-10
 - editing, 1-9
 - exports data to spreadsheet, 1-8
 - grants on, 1-9
 - indexes associated, 1-9
 - insert row, 1-8
 - modify column, 1-10
 - remove all rows, 1-10
 - rename, 1-10
 - rename column, 1-10
 - report of number of rows, 1-8
 - sort by column, 1-8
 - statistics about, 1-9
 - user interface defaults, 1-9
 - viewing data, 1-8
- Text Data Load Repository, 4-6
- text file
 - loading, 4-4
- transaction support, 3-5
- trigger
 - browsing, 1-27
 - compiling, 1-28
 - creating, 1-27
 - downloading, 1-28
 - dropping, 1-28
 - editing, 1-27
- type
 - browsing, 1-17
 - creating, 1-16
 - dropping, 1-17
 - grants associated with, 1-17
 - list of synonyms, 1-17

U

- Unload to Text Wizard, 4-5
- Unload to XML Wizard, 4-6
- Utilities
 - Data Dictionary, 4-10
- utilities
 - about, 4-1
 - comparing schemas, 4-1
 - generating DDL, 4-1
 - loading data, 4-1
 - monitoring the database, 4-1
 - restoring dropped objects, 4-1
 - unloading data, 4-1

viewing database details, 4-1
viewing object reports, 4-1

V

view

- browsing, 1-11
- compiling, 1-13
- creating, 1-11
- dropping, 1-13
- editing, 1-12
- grants associated with, 1-12
- objects referenced by, 1-12
- report of data, 1-12
- user interface defaults, 1-12

W

Waits report, 4-14

wizards

- copying and pasting tab-delimited data, 4-4
- exporting contents of table, 4-5
- exporting text file, 4-5
- exporting XML, 4-6
- importing text, 4-4
- importing XML, 4-5

X

XML document

- exporting to, 4-6
- loading, 4-5