

**SeeBeyond™ eBusiness Integration Suite**

# X12 ETD Library User's Guide

*Release 4.5.2*



The information contained in this document is subject to change and is updated periodically to reflect changes to the applicable software. Although every effort has been made to ensure the accuracy of this document, SeeBeyond Technology Corporation (SeeBeyond) assumes no responsibility for any errors that may appear herein. The software described in this document is furnished under a License Agreement and may be used or copied only in accordance with the terms of such License Agreement. Printing, copying, or reproducing this document in any fashion is prohibited except in accordance with the License Agreement. The contents of this document are designated as being confidential and proprietary; are considered to be trade secrets of SeeBeyond; and may be used only in accordance with the License Agreement, as protected and enforceable by law. SeeBeyond assumes no responsibility for the use or reliability of its software on platforms that are not supported by SeeBeyond.

e\*Gate, e\*Insight, e\*Way, e\*Xchange, e\*Xpressway, eBI, iBridge, Intelligent Bridge, IQ, SeeBeyond, and the SeeBeyond logo are trademarks and service marks of SeeBeyond Technology Corporation. All other brands or product names are trademarks of their respective companies.

© 2000–2002 by SeeBeyond Technology Corporation. All Rights Reserved. This work is protected as an unpublished work under the copyright laws.

**This work is confidential and proprietary information of SeeBeyond and must be maintained in strict confidence.**

Version 20020304133504.

# Contents

<b>List of Tables</b>	<b>6</b>
<b>List of Figures</b>	<b>7</b>
<hr/>	
<b>Chapter 1</b>	
<b>Introduction</b>	<b>8</b>
Overview	8
Intended Reader	8
Compatible Systems	8
<hr/>	
<b>Chapter 2</b>	
<b>X12 Overview</b>	<b>10</b>
<b>Introduction to X12</b>	<b>10</b>
What Is X12?	10
What Is a Message Structure?	11
<b>Components of an X12 Envelope</b>	<b>11</b>
Data Elements	12
Segments	12
Loops	12
Delimiters	12
<b>Structure of an X12 Envelope</b>	<b>13</b>
Transaction Set (ST/SE)	17
Functional Group (GS/GE)	18
Interchange Envelope (ISA/IEA)	19
Control Numbers	20
ISA13 (Interchange Control Number)	20
GS06 (Functional Group Control Number)	21
ST02 (Transaction Set Control Number)	21
<b>Backward Compatibility</b>	<b>21</b>
<b>Messages</b>	<b>21</b>
<b>Security</b>	<b>30</b>
<b>Example of EDI Usage</b>	<b>30</b>

Overview of EDI Payments Processing	31
Types of Information that Are Exchanged Electronically	31
Types of Electronic Payment	32
Transfer of Funds	32
Payment-Related EDI Transactions	33
<b>Acknowledgment Types</b>	<b>33</b>
TA1, Interchange Acknowledgment	33
997, Functional Acknowledgment	33
Application Acknowledgments	34
<b>Key Parts of EDI Processing Logic</b>	<b>34</b>
Structures	35
Validations, Translations, Enveloping, Acknowledgments	35
X12 Acknowledgments in e*Xchange Partner Manager	35
Trading Partner Agreements	35
<b>Additional Information</b>	<b>36</b>

---

## Chapter 3

<b>X12 Template Installation</b>	<b>37</b>
X12 Libraries	37
Installation Procedure	38
X12 Files and Folders	39
X12 Folder Structure Created by Installation	40
X12 Files	41
File Names	42
Transaction Template File Names—Monk	42
Segment Template File Names—Monk	43
Transaction Template File Names—Java	43
Customizing a Monk Message Structure	43

---

## Chapter 4

<b>Working With the X12 ETDs</b>	<b>45</b>
Viewing an X12 ETD in the ETD Editor	45
Setting the Delimiters	46
Running Validation in the Collaboration Rules Component	48
Creating a Collaboration Rule to Validate the ETD	49
Alternative Formats: ANSI and XML	49
XML Format for X12	50
Setting the Collaboration to XML Output	51
Possible Differences in Output When Using Pass-Through	53

---

Chapter 5

<b>X12 ETD Library Java Methods</b>	<b>54</b>
setDefaultX12Delimiters	54
getSegmentTerminator	55
setSegmentTerminator	56
getElementSeparator	56
setElementSeparator	57
getSubelementSeparator	57
setSubelementSeparator	58
getRepetitionSeparator	59
setRepetitionSeparator	59
validate (no parameters)	60
validate (boolean parameter)	61
setXMLOutput (boolean isXML)	61
marshal (boolean parameter)	62

---

Appendix A

<b>Implementation Tips</b>	<b>64</b>
<b>Running the Command-Line Java Tester</b>	<b>64</b>
Setting the Classpath	65
Syntax	65
Example	65
Running the utility with the classpath already set	66
Setting the classpath and running the utility	66
 <b>Index</b>	 <b>67</b>

# List of Tables

Table 1	Default Delimiters in X12 ETD Library	13
Table 2	Transactions Included in X12 Version 4010	21
Table 3	Key Parts of EDI Processing	34
Table 4	X12 Versions Supported	37
Table 5	X12 ETD Library CDs	38
Table 6	X12 Template Locations	40

# List of Figures

Figure 1	X12 Envelope Schematic	14
Figure 2	X12 997 Segment Table	15
Figure 3	X12 997 Open in Third-Party Tool	15
Figure 4	X12 997 Viewed in Monk ETD Editor	16
Figure 5	X12 997 Viewed in Java ETD Editor	16
Figure 6	Positive 997 (Functional Acknowledgment) Viewed in Message Tracking	17
Figure 7	Negative 997 (Functional Acknowledgment) Viewed in Message Tracking	17
Figure 8	Example of a Transaction Set Header (ST)	18
Figure 9	Example of a Transaction Set Trailer (SE)	18
Figure 10	Example of a Functional Group Header (GS)	19
Figure 11	Example of a Functional Group Trailer (GE)	19
Figure 12	Example of an Interchange Header (ISA)	20
Figure 13	Example of an Interchange Trailer (IEA)	20
Figure 14	X12 Version Folders	40
Figure 15	Transaction Set Structures for X12 Version 4020 (Java)	41
Figure 16	Segment Template Files for X12 Version 4020 Monk	42
Figure 17	X12 270 In the ETD Editor	45
Figure 18	Setting Delimiters in a Collaboration Rules Component	47
Figure 19	Parameters for Method Dialog Box	48
Figure 20	Parameters for Method Dialog Box Showing Delimiter Value	48
Figure 21	XML X12 DTD	50
Figure 22	X12 997 Functional Acknowledgment—XML	51
Figure 23	X12 997 Functional Acknowledgment—ANSI Format	51
Figure 24	Setting the Output to XML in the X12 Collaboration	52
Figure 25	Specifying the Parameter for setXMLOutput ( )	52

# Introduction

This chapter introduces you to the X12 ETD Library User's Guide.

*Note: If you are upgrading to version 4.5.2 from a previous version of this library, you must recompile all Collaborations that use these ETDs after installing the new version.*

---

## 1.1 Overview

Each of the e\*Gate Event Type Definition (ETD) libraries contains sets of pre-built structures for industry-standard formats. e\*Gate ETD files are message format definitions in two formats:

- Java
- Monk

The X12 ETD library is a feature of the SeeBeyond eBusiness Integration Suite, and contains message definitions for X12 messages. This document gives a brief overview of X12 and the X12 message structures provided with e\*Gate, and provides information on installing and using the X12 ETD libraries.

---

## 1.2 Intended Reader

The reader of this guide is presumed to be a developer or system administrator with responsibility for maintaining the e\*Gate™ system or the SeeBeyond™ eBusiness Integration Suite, to have expert-level knowledge of Windows 2000 and Windows NT operations and administration, and to be thoroughly familiar with Microsoft Windows graphical user interfaces.

---

## 1.3 Compatible Systems

The e\*Gate X12 ETD Library supports the following platforms:

- Windows 2000, Windows 2000 SP1, and Windows 2000 SP2



- Windows NT 4.0 SP61
- Compaq Tru64 Version 4.0F and 5.0A
- Solaris 2.6, 7, and 8
- HP-UX 11.0 and 11i
- AIX 4.3.3
- Red Hat Linux 6.2

It also supports the following operating systems in Japanese:

- Windows 2000, Windows 2000 SP1, and Windows 2000 SP2
- Windows NT 4.0 SP61
- Solaris 2.6, 7, and 8
- HP-UX 11.0

**Note:** *Windows Systems*—The SeeBeyond eBusiness Integration Suite is fully compliant with Windows 2000 and Windows NT 4.0 platforms. When this document references Windows, such statements apply to both Windows platforms.

**Note:** *UNIX Systems*—This guide uses the backslash (“\”) as the separator within path names. If you are working on a UNIX system, please make the appropriate substitutions.

# X12 Overview

This chapter provides the following information:

- An overview of X12, including the structure of an X12 envelope, data elements, and syntax.
- An explanation of how to use the generic message structures provided as an add-on to e\*Gate to help you quickly create the structures you need for various X12 transactions.
- An example of how X12 is used in payment processing.

---

## 2.1 Introduction to X12

The following sections provide an introduction to X12 and the message structures that comprise the X12 ETD Library.

### 2.1.1 What Is X12?

X12 is an EDI (electronic data interchange) standard, developed for the electronic exchange of machine-readable information between businesses.

The Accredited Standards Committee (ASC) X12 was chartered by the American National Standards Institute (ANSI) in 1979 to develop uniform standards for interindustry electronic interchange of business transactions—electronic data interchange (EDI). The result was the X12 standard.

The X12 body develops, maintains, interprets, and promotes the proper use of the ASC standard. Data Interchange Standards Association (DISA) publishes the X12 standard and the UN/EDIFACT standard. The X12 body comes together three times a year to develop and maintain EDI standards. Its main objective is to develop standards to facilitate electronic interchange relating to business transactions such as order placement and processing, shipping and receiving information, invoicing, and payment information.

The X12 EDI standard is used for EDI within the United States. UN/EDIFACT is broadly used in Europe and other parts of the world.

X12 was originally intended to handle large batches of transactions. However, it has been extended to encompass real-time processing (transactions sent individually as

they are ready to send, rather than held for batching) for some healthcare transactions to accommodate the healthcare industry.

## 2.1.2 What Is a Message Structure?

The term *message structure* (also called a transaction set structure) refers to the way in which data elements are organized and related to each other for a particular EDI transaction.

In e\*Gate, a message structure is called an Event Type Definition (ETD). Each message structure (ETD) consists of the following:

- Physical hierarchy

The predefined way in which envelopes, segments, and data elements are organized to describe a particular X12 EDI transaction.

- Delimiters

The specific predefined characters that are used to mark the beginning and end of envelopes, segments, and data elements.

- Properties

The characteristics of a data element, such as the length of each element, default values, and indicators that specify attributes of a data element—for example, whether it is required, optional, or repeating.

The transaction set structure of an invoice that is sent from one trading partner to another defines the header, trailer, segments, and data elements required by invoice transactions. Installation of X12 templates for a specific version includes transaction set structures for each of the transactions available in that version. You can use these structures as provided, or customize them to suit your business needs.

e\*Xchange Partner Manager uses e\*Gate Event Type Definitions, which are based on the X12 message structures, to verify that the data in the messages coming in or going out is in the correct format. There is a message structure for each X12 transaction.

The list of transactions provided is different for each version of X12. This book uses Version 4010 as an example in illustrating how to install and work with X12 templates.

---

## 2.2 Components of an X12 Envelope

X12 messages are all ASCII text, with the exception of the BIN segment which is binary.

Each X12 message is made up of a combination of the following elements:

- Data elements
- Segments
- Loops

Elements are separated by delimiters.

More information on each of these is provided below.

## 2.2.1 Data Elements

The data element is the smallest named unit of information in the X12 standard. Data elements can be broken down into two types. The distinction between the two is strictly a matter of how they are used. The two types are:

- Simple  
If a data element occurs in a segment outside the defined boundaries of a composite data structure it is called a simple data element.
- Composite  
If a data element occurs as an ordinal member of a composite data structure it is called a composite data element.

Each data element has a unique reference number; it also has a name, description, data type, and minimum and maximum length.

## 2.2.2 Segments

A segment is a logical grouping of data elements. In X12, the same segment can be used for different purposes. This means that a field's meaning can change based on the segment. For example:

- The NM1 segment is for *any* name (patient, provider, organization, doctor)
- The DTP segment is for *any* date (date of birth, discharge date, coverage period)

For more information on the X12 enveloping segments, refer to [“Structure of an X12 Envelope” on page 13](#).

## 2.2.3 Loops

Loops are sets of repeating ordered segments. In X12 you can locate elements by specifying:

- The transaction set (for example, 270)
- The loop (for example, “loop 1000” or “info. receiver loop”)
- The occurrence of the loop
- The segment (for example, BGN)
- The field number (for example, 01)
- The occurrence of the segment (if it is a repeating segment)

## 2.2.4 Delimiters

In an X12 message, the various delimiters act as syntax, dividing up the different elements of a message. The delimiters used in the message are defined in the

interchange control header, the outermost layer enveloping the message. For this reason, there is flexibility in the delimiters that are used.

No suggested delimiters are recommended as part of the X12 standards, but the industry-specific implementation guides do have recommended delimiters.

The default delimiters used by the SeeBeyond X12 ETD Library are the same as those recommended by the industry-specific implementation guides. These delimiters are shown in Table 1.

**Table 1** Default Delimiters in X12 ETD Library

Type of Delimiter	Default Value
Segment terminator	~ (tilde)
Data element separator	* (asterisk)
Subelement (component) separator	: (colon)

Within e\*Xchange Partner Manager, delimiters are specified at the outer envelope level. The delimiters you define are applied to all transaction types.

If you do not specify delimiters, e\*Xchange expects the default delimiters as shown in Table 1.

***Note:** It is important to note that errors could result if the transmitted data itself includes any of the characters that have been defined as delimiters. Specifically, the existence of asterisks within transmitted application data is a known issue in X12, and can cause problems with translation.*

---

## 2.3 Structure of an X12 Envelope


The rules applying to the structure of an X12 envelope are very strict, to ensure the integrity of the data and the efficiency of the information exchange.

The actual X12 message structure has three main levels. From the lowest to the highest they are:

- Interchange Envelope
- Functional Group
- Transaction Set

A schematic of X12 envelopes is shown in Figure 1. Each of these levels is explained in more detail in the following sections.

Figure 1 X12 Envelope Schematic

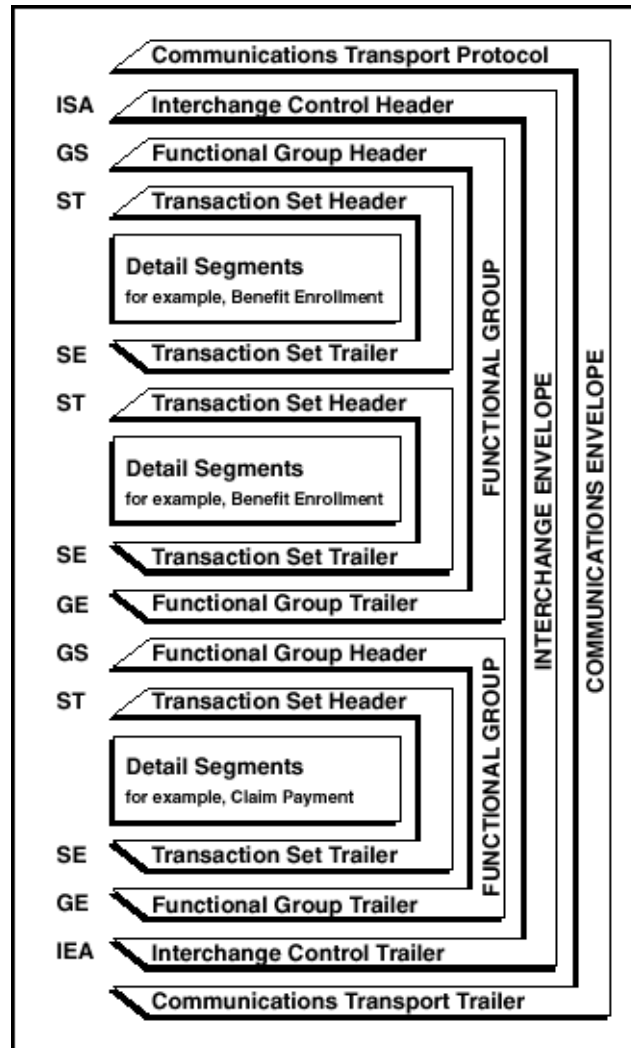

*Note: The above schematic is from Appendix B of an X12 Implementation Guide.*

Figure 2 shows the standard segment table for an X12 997 (Functional Acknowledgment) as it appears in the X12 standard and in most industry-specific implementation guides.

Figure 2 X12 997 Segment Table

Table 1 - Header

POS. #	SEG. ID	NAME	REQ. DES.	MAX USE	LOOP REPEAT
010	ST	Transaction Set Header	M	1	
020	AK1	Functional Group Response Header	M	1	
LOOP ID - AK2					999999
030	AK2	Transaction Set Response Header	O	1	
LOOP ID - AK2/AK3					999999
040	AK3	Data Segment Note	O	1	
050	AK4	Data Element Note	O	99	
060	AK5	Transaction Set Response Trailer	M	1	
070	AK9	Functional Group Response Trailer	M	1	
080	SE	Transaction Set Trailer	M	1	

Figure 3 shows the same transaction as viewed in a third-party implementation guide editor. You can use the third-party tool to edit the transaction and export it in the EDI Standard Exchange Format (SEF).

In e\*Exchange Partner Manager, you can use the Validation Rules Builder tool to convert files that are in Standard Exchange Format (SEF) version 1.4 or 1.5 into e\*Gate Event Type Definition (ETD) files (.ssc files) and Collaboration Rules files (.tsc files).

Figure 3 X12 997 Open in Third-Party Tool

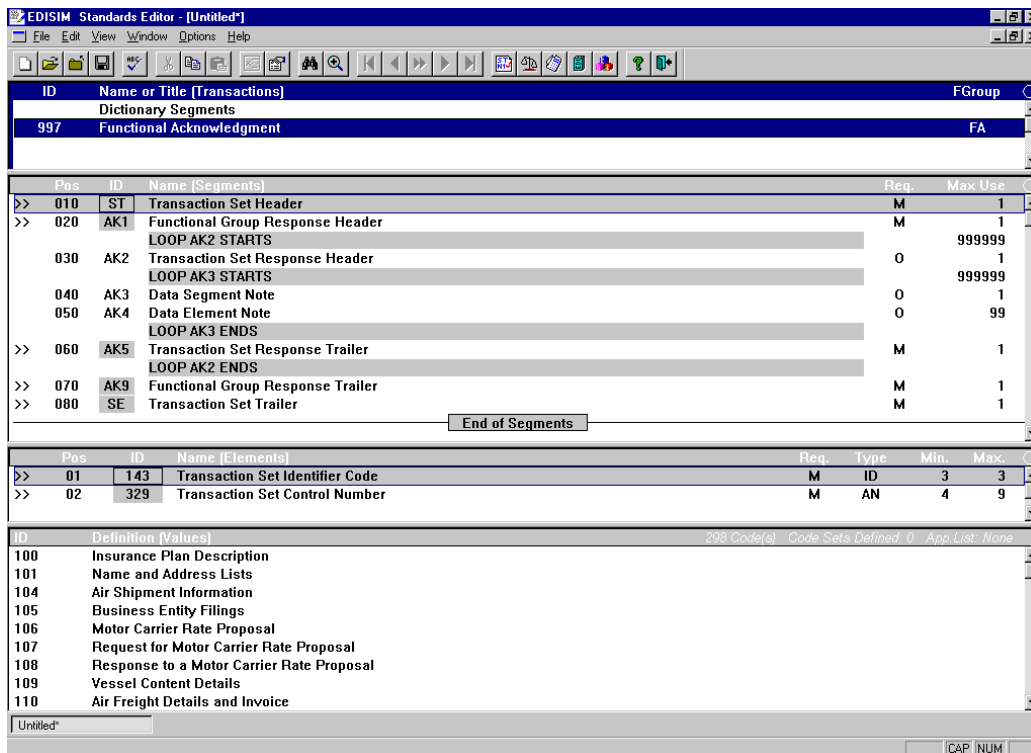


Figure 4 shows the same transaction as viewed in the Monk ETD Editor in e\*Gate.

**Figure 4** X12 997 Viewed in Monk ETD Editor

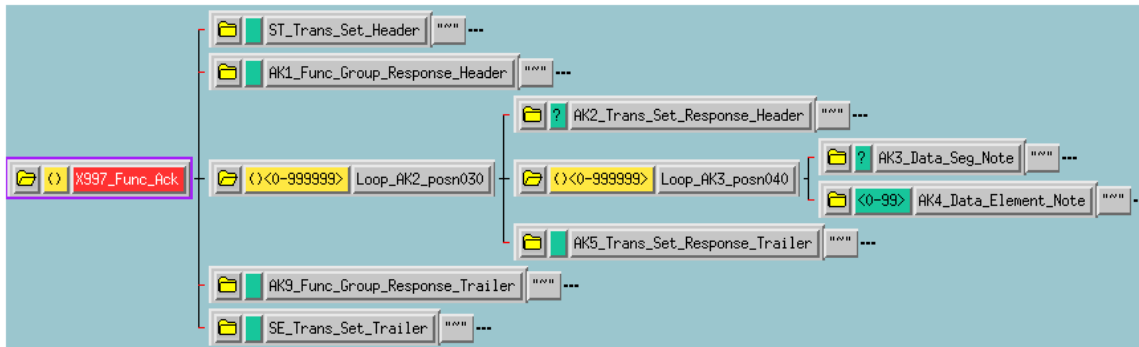


Figure 5 shows the same transaction as viewed in the Java ETD Editor.

**Figure 5** X12 997 Viewed in Java ETD Editor

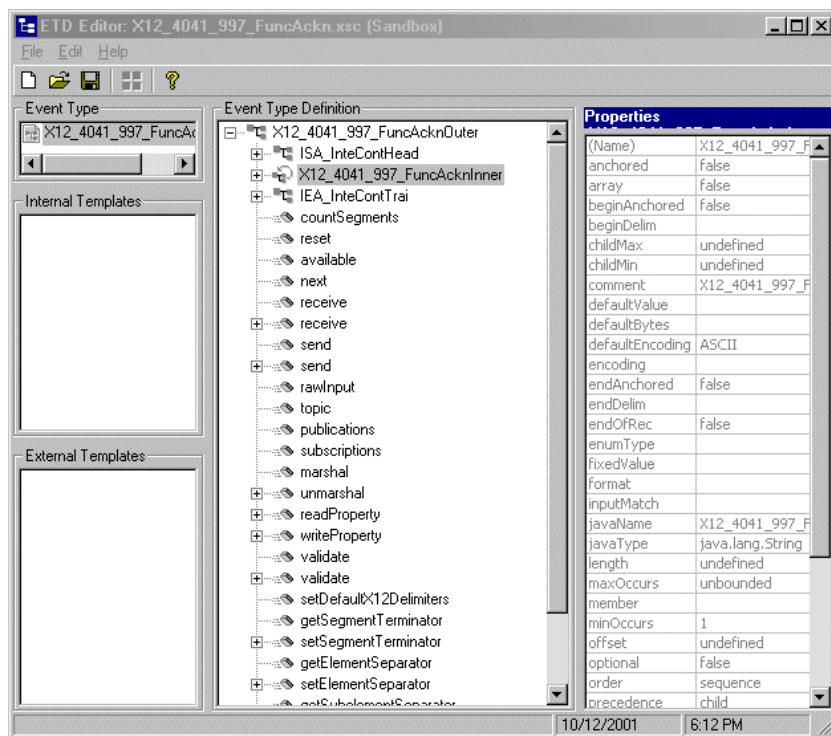


Figure 6 shows an example of a positive 997 acknowledgment, as viewed in the Message Tracking window in the e\*Xchange Partner Manager.

**Note:** The message shown in Figure 6 was part of a batch and therefore includes only the ST/SE (transaction set) envelope layer.



**Figure 6** Positive 997 (Functional Acknowledgment) Viewed in Message Tracking


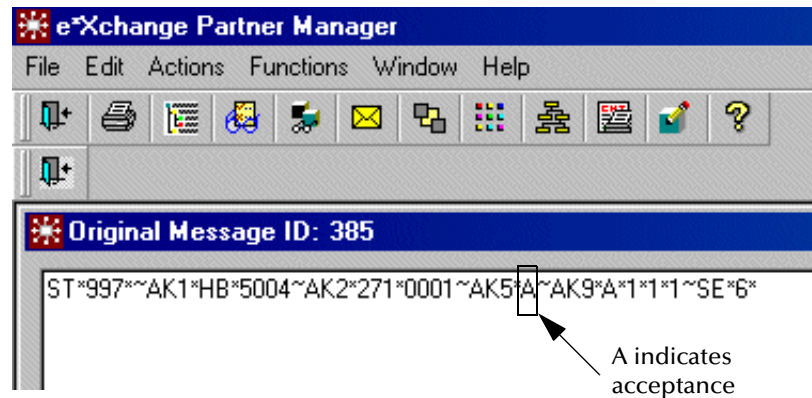


Figure 7 shows an example of a negative 997 acknowledgment, as viewed in the Message Tracking window in the eXchange Partner Manager.

*Note:* The message shown in Figure 7 is an interactive message and therefore includes all enveloping layers.

**Figure 7** Negative 997 (Functional Acknowledgment) Viewed in Message Tracking

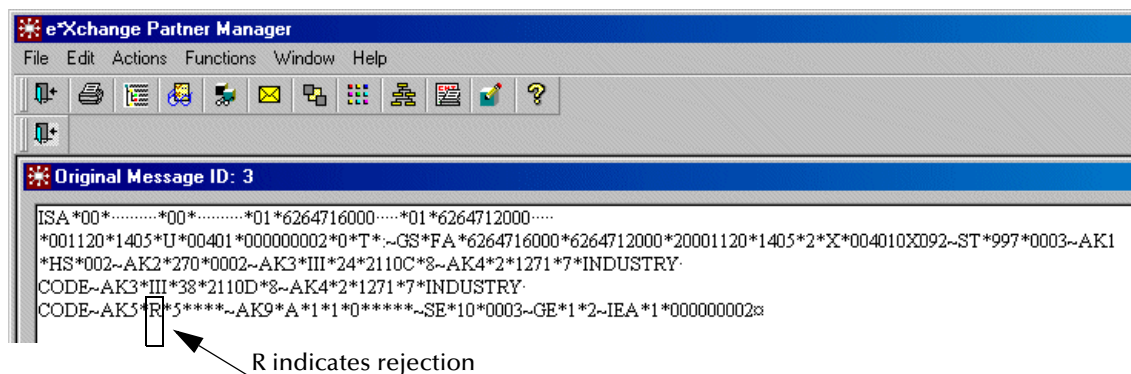

### 2.3.1 Transaction Set (ST/SE)

Each transaction set (also called a transaction) contains three things:


- A transaction set header
- A transaction set footer
- A single message, enveloped within the header and footer

The transaction has a three-digit code, a text title, and a two-letter code; for example, **997, Functional Acknowledgment (FA)**.


The transaction is comprised of logically related pieces of information, grouped into units called segments. For example, one segment used in the transaction set might convey the address: city, state, ZIP code, and other geographical information. A transaction set can contain multiple segments. For example, the address segment could be used repeatedly to convey multiple sets of address information.

The X12 standard defines the sequence of segments in the transaction set and also the sequence of elements within each segment. The relationship between segments and elements could be compared to the relationship between records and fields in a database environment.

**Figure 8** Example of a Transaction Set Header (ST)

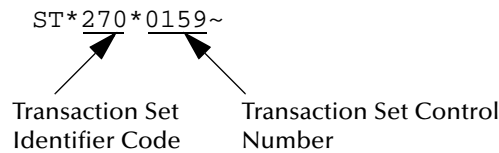

**Figure 9** Example of a Transaction Set Trailer (SE)

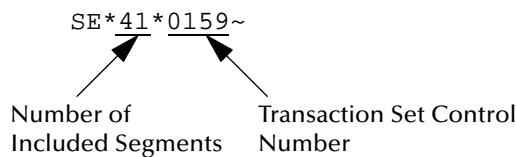

## 2.3.2 Functional Group (GS/GE)

A functional group is comprised of one or more transaction sets, all of the same type, that can be batched together in one transmission. The functional group is defined by the header and trailer; the Functional Group Header (GS) appears at the beginning, and the Functional Group Trailer (GE) appears at the end. Many transaction sets can be included in the functional group, but all transactions must be of the same type.

Within the functional group, each transaction set is assigned a functional identifier code, which is the first data element of the header segment. The transaction sets that comprise a specific functional group are identified by this functional ID code.


The functional group header (GS) segment contains the following information:

- Functional ID code (the two-letter transaction code; for example, PO for an 850 Purchase Order, HS for a 270 Eligibility, Coverage or Benefit Inquiry) to indicate the type of transaction in the functional group
- Identification of sender and receiver
- Control information (the functional group control numbers in the header and trailer segments must be identical)
- Date and time


The functional group trailer (GE) segment contains the following information:

- Number of transaction sets included
- Group control number (originated and maintained by the sender)

**Figure 10** Example of a Functional Group Header (GS)

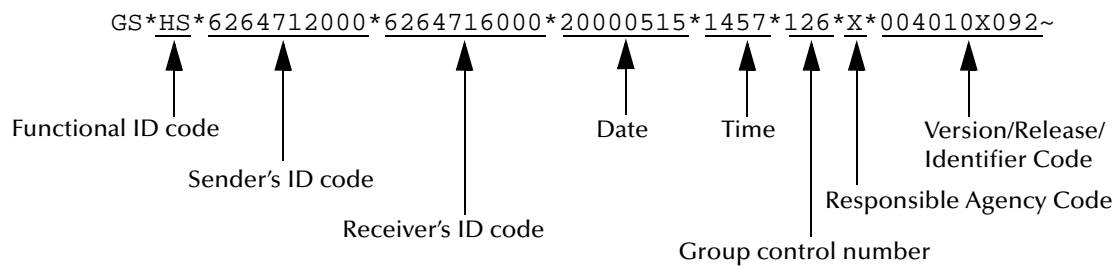

**Figure 11** Example of a Functional Group Trailer (GE)

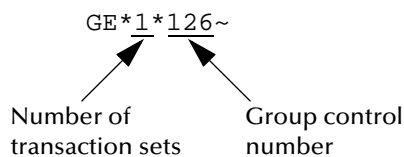

### 2.3.3 Interchange Envelope (ISA/IEA)

The interchange envelope is the wrapper for all the data to be sent in one batch. It can contain multiple functional groups. This means that transactions of different types can be included in the interchange envelope, with each type of transaction stored in a separate functional group.

The interchange envelope is defined by the header and trailer; the Interchange Control Header (ISA) appears at the beginning, and the Interchange Control Trailer (IEA) appears at the end.


As well as enveloping one or more functional groups, the interchange header and trailer segments include the following information:

- Data element separators and data segment terminator
- Identification of sender and receiver
- Control information (used to verify that the message was correctly received)
- Authorization and security information, if applicable

The sequence of information that is transmitted is as follows:

- Interchange header
- Optional interchange-related control segments
- Actual message information, grouped by transaction type into functional groups
- Interchange trailer


**Figure 12** Example of an Interchange Header (ISA)

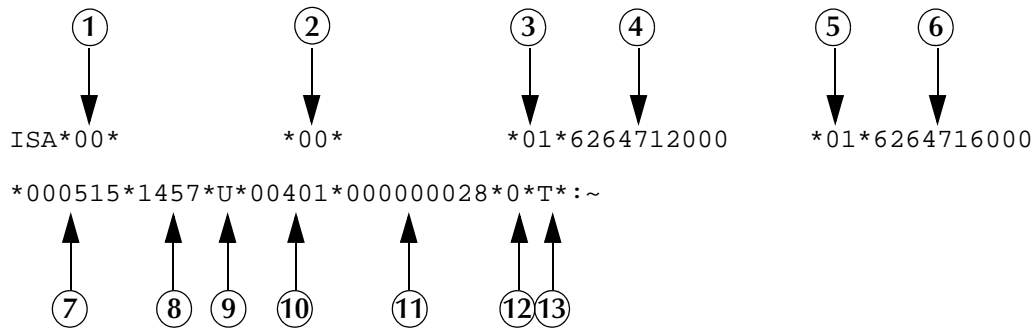

Interchange Header Segments from Figure 12:

- |                                       |                                       |
|---------------------------------------|---------------------------------------|
| 1 Authorization Information Qualifier | 8 Time                                |
| 2 Security Information Qualifier      | 9 Repetition Separator                |
| 3 Interchange ID Qualifier            | 10 Interchange Control Version Number |
| 4 Interchange Sender ID               | 11 Interchange Control Number         |
| 5 Interchange ID Qualifier            | 12 Acknowledgment Requested           |
| 6 Interchange Receiver ID             | 13 Usage Indicator                    |
| 7 Date                                |                                       |

**Figure 13** Example of an Interchange Trailer (IEA)

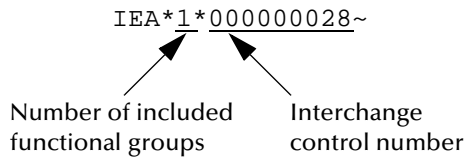

### 2.3.4 Control Numbers

The X12 standard includes a control number for each enveloping layer:

- ISA13—Interchange Control Number
- GS06—Functional Group Control Number
- ST02—Transaction Set Control Number

The control numbers act as identifiers, useful in message identification and tracking. The e\*Xchange Partner Manager includes a flag for each control number, so you can choose not to assign control numbers to outgoing messages and not to store control numbers on incoming messages.

#### ISA13 (Interchange Control Number)

The ISA13 is assigned by the message sender. It must be unique for each interchange. This is the primary means used by e\*Xchange Partner Manager to identify an individual interchange.

## GS06 (Functional Group Control Number)

The GS06 is assigned by the sender. It must be unique within the Functional Group assigned by the originator for a transaction set.

**Note:** *The Functional Group control number GS06 in the header must be identical to the same data element in the associated Functional Group trailer, GE02.*

## ST02 (Transaction Set Control Number)

The ST02 is assigned by the sender, and is stored in the transaction set header. It must be unique within the Functional Group.

**Note:** *The control number in ST02 must be identical with the SE02 element in the transaction set footer, and must be unique within a Functional Group (GS-GE). Once you have defined a value for SE02, e\*Xchange Partner Manager uses the same value for SE02.*

---

## 2.4 Backward Compatibility

Each version of X12 is slightly different. Each new version has some new transactions; in addition, existing transactions might have changed.

New versions of X12 are usually backward compatible; however, this is not a requirement of the X12 rules. You should not expect different versions of X12 to be backward compatible, but you can expect that when you analyze the differences only a few changes are required in the message structures.

**Note:** *In this context backward compatible means that software that parses one version might not be able to parse the next version, even if the software ignores any unexpected new segments, data elements at the end of segments, and sub-elements at the end of composite data elements. Not backward compatible means that required segments can disappear entirely, data elements can change format and usage, and required data elements can become optional.*

---

## 2.5 Messages

An example of an X12 version is shown in Table 2. This table lists the transactions that comprise X12 version 4010.

**Table 2** Transactions Included in X12 Version 4010

Number	Title
101	Name and Address Lists
104	Air Shipment Information

**Table 2** Transactions Included in X12 Version 4010 (Continued)

Number	Title
105	Business Entity Filings
106	Motor Carrier Rate Proposal
107	Request for Motor Carrier Rate Proposal
108	Response to a Motor Carrier Rate Proposal
109	Vessel Content Details
110	Air Freight Details and Invoice
112	Property Damage Report
120	Vehicle Shipping Order
121	Vehicle Service
124	Vehicle Damage
125	Multilevel Railcar Load Details
126	Vehicle Application Advice
127	Vehicle Buying Order
128	Dealer Information
129	Vehicle Carrier Rate Update
130	Student Educational Record (Transcript)
131	Student Educational Record (Transcript) Acknowledgment
135	Student Loan Application
138	Testing Results Request and Report
139	Student Loan Guarantee Result
140	Product Registration
141	Product Service Claim Response
142	Product Service Claim
143	Product Service Notification
144	Student Loan Transfer and Status Verification
146	Request for Student Educational Record (Transcript)
147	Response to Request for Student Educational Record (Transcript)
148	Report of Injury, Illness or Incident
149	Notice of Tax Adjustment or Assessment
150	Tax Rate Notification
151	Electronic Filing of Tax Return Data Acknowledgment
152	Statistical Government Information
153	Unemployment Insurance Tax Claim or Charge Information
154	Uniform Commercial Code Filing
155	Business Credit Report

**Table 2** Transactions Included in X12 Version 4010 (Continued)

Number	Title
157	Notice of Power of Attorney
159	Motion Picture Booking Confirmation
160	Transportation Automatic Equipment Identification
161	Train Sheet
163	Transportation Appointment Schedule Information
170	Revenue Receipts Statement
175	Court and Law Enforcement Notice
176	Court Submission
180	Return Merchandise Authorization and Notification
185	Royalty Regulatory Report
186	Insurance Underwriting Requirements Reporting
188	Educational Course Inventory
189	Application for Admission to Educational Institutions
190	Student Enrollment Verification
191	Student Loan Pre-Claims and Claims
194	Grant or Assistance Application
195	Federal Communications Commission (FCC) License Application
196	Contractor Cost Data Reporting
197	Real Estate Title Evidence
198	Loan Verification Information
199	Real Estate Settlement Information
200	Mortgage Credit Report
201	Residential Loan Application
202	Secondary Mortgage Market Loan Delivery
203	Secondary Mortgage Market Investor Report
204	Motor Carrier Load Tender
205	Mortgage Note
206	Real Estate Inspection
210	Motor Carrier Freight Details and Invoice
211	Motor Carrier Bill of Lading
212	Motor Carrier Delivery Trailer Manifest
213	Motor Carrier Shipment Status Inquiry
214	Transportation Carrier Shipment Status Message
215	Motor Carrier Pick-up Manifest
216	Motor Carrier Shipment Pick-up Notification

**Table 2** Transactions Included in X12 Version 4010 (Continued)

<b>Number</b>	<b>Title</b>
217	Motor Carrier Loading and Route Guide
218	Motor Carrier Tariff Information
219	Logistics Service Request
220	Logistics Service Response
222	Cartage Work Assignment
223	Consolidators Freight Bill and Invoice
224	Motor Carrier Summary Freight Bill Manifest
225	Response to a Cartage Work Assignment
242	Data Status Tracking
244	Product Source Information
248	Account Assignment/Inquiry and Service/Status
249	Animal Toxicological Data
250	Purchase Order Shipment Management Document
251	Pricing Support
252	Insurance Producer Administration
255	Underwriting Information Services
256	Periodic Compensation
260	Application for Mortgage Insurance Benefits
261	Real Estate Information Request
262	Real Estate Information Report
263	Residential Mortgage Insurance Application Response
264	Mortgage Loan Default Status
265	Real Estate Title Insurance Services Order
266	Mortgage or Property Record Change Notification
267	Individual Life, Annuity and Disability Application
268	Annuity Activity
270	Eligibility, Coverage or Benefit Inquiry
271	Eligibility, Coverage or Benefit Information
272	Property and Casualty Loss Notification
273	Insurance/Annuity Application Status
275	Patient Information
276	Health Care Claim Status Request
277	Health Care Claim Status Notification
278	Health Care Services Review Information
280	Voter Registration Information



**Table 2** Transactions Included in X12 Version 4010 (Continued)

Number	Title
285	Commercial Vehicle Safety and Credentials Information Exchange
286	Commercial Vehicle Credentials
288	Wage Determination
290	Cooperative Advertising Agreements
300	Reservation (Booking Request) (Ocean)
301	Confirmation (Ocean)
303	Booking Cancellation (Ocean)
304	Shipping Instructions
309	U.S. Customs Manifest
310	Freight Receipt and Invoice (Ocean)
311	Canadian Customs Information
312	Arrival Notice (Ocean)
313	Shipment Status Inquiry (Ocean)
315	Status Details (Ocean)
317	Delivery/Pickup Order
319	Terminal Information
322	Terminal Operations and Intermodal Ramp Activity
323	Vessel Schedule and Itinerary (Ocean)
324	Vessel Stow Plan (Ocean)
325	Consolidation of Goods In Container
326	Consignment Summary List
350	U.S. Customs Status Information
352	U.S. Customs Carrier General Order Status
353	U.S. Customs Events Advisory Details
354	U.S. Customs Automated Manifest Archive Status
355	U.S. Customs Acceptance/Rejection
356	U.S. Customs Permit to Transfer Request
357	U.S. Customs In-Bond Information
358	U.S. Customs Consist Information
361	Carrier Interchange Agreement (Ocean)
362	Cargo Insurance Advice of Shipment
404	Rail Carrier Shipment Information
410	Rail Carrier Freight Details and Invoice
414	Rail Carhire Settlements
417	Rail Carrier Waybill Interchange

**Table 2** Transactions Included in X12 Version 4010 (Continued)

Number	Title
418	Rail Advance Interchange Consist
419	Advance Car Disposition
420	Car Handling Information
421	Estimated Time of Arrival and Car Scheduling
422	Shipper's Car Order
423	Rail Industrial Switch List
425	Rail Waybill Request
426	Rail Revenue Waybill
429	Railroad Retirement Activity
431	Railroad Station Master File
432	Rail Deprescription
433	Railroad Reciprocal Switch File
434	Railroad Mark Register Update Activity
435	Standard Transportation Commodity Code Master
436	Locomotive Information
437	Railroad Junctions and Interchanges Activity
440	Shipment Weights
451	Railroad Event Report
452	Railroad Problem Log Inquiry or Advice
453	Railroad Service Commitment Advice
455	Railroad Parameter Trace Registration
456	Railroad Equipment Inquiry or Advice
460	Railroad Price Distribution Request or Response
463	Rail Rate Reply
466	Rate Request
468	Rate Docket Journal Log
470	Railroad Clearance
475	Rail Route File Maintenance
485	Ratemaking Action
486	Rate Docket Expiration
490	Rate Group Definition
492	Miscellaneous Rates
494	Rail Scale Rates
500	Medical Event Reporting
501	Vendor Performance Review

**Table 2** Transactions Included in X12 Version 4010 (Continued)

Number	Title
503	Pricing History
504	Clauses and Provisions
511	Requisition
517	Material Obligation Validation
521	Income or Asset Offset
527	Material Due-In and Receipt
536	Logistics Reassignment
540	Notice of Employment Status
561	Contract Abstract
567	Contract Completion Status
568	Contract Payment Management Report
601	U.S. Customs Export Shipment Information
602	Transportation Services Tender
620	Excavation Communication
625	Well Information
650	Maintenance Service Order
715	Intermodal Group Loading Plan
805	Contract Pricing Proposal
806	Project Schedule Reporting
810	Invoice
811	Consolidated Service Invoice/Statement
812	Credit/Debit Adjustment
813	Electronic Filing of Tax Return Data
814	General Request, Response or Confirmation
815	Cryptographic Service Message
816	Organizational Relationships
818	Commission Sales Report
819	Operating Expense Statement
820	Payment Order/Remittance Advice
821	Financial Information Reporting
822	Account Analysis
823	Lockbox
824	Application Advice
826	Tax Information Exchange
827	Financial Return Notice

**Table 2** Transactions Included in X12 Version 4010 (Continued)

Number	Title
828	Debit Authorization
829	Payment Cancellation Request
830	Planning Schedule with Release Capability
831	Application Control Totals
832	Price/Sales Catalog
833	Mortgage Credit Report Order
834	Benefit Enrollment and Maintenance
835	Health Care Claim Payment/Advice
836	Procurement Notices
837	Health Care Claim
838	Trading Partner Profile
839	Project Cost Reporting
840	Request for Quotation
841	Specifications/Technical Information
842	Nonconformance Report
843	Response to Request for Quotation
844	Product Transfer Account Adjustment
845	Price Authorization Acknowledgment/Status
846	Inventory Inquiry/Advice
847	Material Claim
848	Material Safety Data Sheet
849	Response to Product Transfer Account Adjustment
850	Purchase Order
851	Asset Schedule
852	Product Activity Data
853	Routing and Carrier Instruction
854	Shipment Delivery Discrepancy Information
855	Purchase Order Acknowledgment
856	Ship Notice/Manifest
857	Shipment and Billing Notice
858	Shipment Information
859	Freight Invoice
860	Purchase Order Change Request - Buyer Initiated
861	Receiving Advice/Acceptance Certificate
862	Shipping Schedule

**Table 2** Transactions Included in X12 Version 4010 (Continued)

Number	Title
863	Report of Test Results
864	Text Message
865	Purchase Order Change Acknowledgment/Request - Seller Initiated
866	Production Sequence
867	Product Transfer and Resale Report
868	Electronic Form Structure
869	Order Status Inquiry
870	Order Status Report
871	Component Parts Content
872	Residential Mortgage Insurance Application
875	Grocery Products Purchase Order
876	Grocery Products Purchase Order Change
877	Manufacturer Coupon Family Code Structure
878	Product Authorization/De-authorization
879	Price Information
880	Grocery Products Invoice
881	Manufacturer Coupon Redemption Detail
882	Direct Store Delivery Summary Information
883	Market Development Fund Allocation
884	Market Development Fund Settlement
885	Retail Account Characteristics
886	Customer Call Reporting
887	Coupon Notification
888	Item Maintenance
889	Promotion Announcement
891	Deduction Research Report
893	Item Information Request
894	Delivery/Return Base Record
895	Delivery/Return Acknowledgment or Adjustment
896	Product Dimension Maintenance
920	Loss or Damage Claim - General Commodities
924	Loss or Damage Claim - Motor Vehicle
925	Claim Tracer
926	Claim Status Report and Tracer Reply
928	Automotive Inspection Detail

**Table 2** Transactions Included in X12 Version 4010 (Continued)

Number	Title
940	Warehouse Shipping Order
943	Warehouse Stock Transfer Shipment Advice
944	Warehouse Stock Transfer Receipt Advice
945	Warehouse Shipping Advice
947	Warehouse Inventory Adjustment Advice
980	Functional Group Totals
990	Response to a Load Tender
996	File Transfer
997	Functional Acknowledgment
998	Set Cancellation

---

## 2.6 Security

EDI-INT is an international standard for secure EDI transmissions, both X12 and UN/EDIFACT. It is emerging as a widespread EDI security standard.

EDI for the Internet is an international standard for secure EDI transmissions, both X12 and UN/EDIFACT, published by the Internet Engineering Task Force (IETF).

EDI-INT documentation specifies how to use internet mail protocols to transport EDI documents, using either PGP/MIME or S/MIME. It also discusses the implementation of encryption, digital signature, integrity and signed-receipt for MIME objects transported over SMTP, HTTP or FTP.

For additional information visit:

<http://www.ietf.cnri.reston.va.us/ids.by.wg/ediint.html>

The SeeBeyond eBusiness Integration Suite provides the following security-related features in various products and add-ons:

- The e\*Gate Secure Messaging Extension
- HTTPS e\*Way
- e\*Xchange Security Manager

---

## 2.7 Example of EDI Usage

This section provides an overview of the normal processes involved in EDI payment processing.

*Note: This is just a general overview of how electronic payments processing is used. Not everything said here applies to the use of X12 in processing payments.*

## 2.7.1 Overview of EDI Payments Processing

EDI payments processing encompasses both collection and disbursement transactions. The exchange of funds is accomplished by means of credit and debit transfers. It can also include a related bank balance, as well as transaction and account analysis reporting mechanisms.

Most non-monetary EDI trading partner communications are handled either directly between the parties or indirectly through their respective value added networks (VANs). However, the exchange of funds requires a financial intermediary. This is normally the bank or banks that hold deposit accounts of the two parties.

EDI involves the exchange of remittance information along with the order to pay. In the United States this can become complex as two standards are involved in the transaction. The remittance information, which acts as an electronic check stub, can be sent in any of the following ways:

- Directly between trading partners or through their respective EDI VAN mailboxes
- Through the banking system, with the beneficiary's bank sending notice of payment to the beneficiary
- By the originator to the originator's bank as an order to pay, with the originator's bank notifying the beneficiary

The trading partners and the capabilities of their respective banks determine the following:

- The routing of the electronic check stub
- Which of the following the payment is:
  - ♦ a debit authorized by the payor and originated by the beneficiary
  - ♦ a credit transfer originated by the payor

## Types of Information that Are Exchanged Electronically

There are several types of information that can be exchanged electronically between bank and customer, including:

- Daily reports of balances and transactions
- Reports of lockbox and EFT (electronic funds transfer) remittances received by the bank
- Authorizations issued to the bank to honor debit transfers
- Monthly customer account analysis statements
- Account reconciliation statements
- Statements of the demand deposit account

The electronic payment mechanism, which is a subset of EDI, involves two separate activities:

- The exchange of payment orders, causing value to transfer from one account to another
- The exchange of related remittance information in standardized machine-processable formats.

## Types of Electronic Payment

The electronic payment can be either of the following:

- Credit transfer, initiated by the payor
- Debit transfer, initiated by the payee as authorized by the payor

Regardless of how the credit transfer was initiated, the payor sends a payment order to its bank in the form of an X12 Payment Order/Remittance Advice (transaction set 820).

The bank then adds data in a format prescribed in the United States by the National Automated Clearing House Association (NACHA) and originates the payment through the Automated Clearing House (ACH) system.

A corporate-to-corporate payment performs two functions:

- Transfers actual monetary value
- Transfers notification of payment from payor to payee

When a credit transfer occurs, these two functions are sometimes treated as one, and sometimes treated separately. The two functions can travel in either of these two ways:

- Together through the banking system
- Separately and by different routes

X12 820 is a data format for transporting a payment order from the originator to its bank. This payment order might be either of the following:

- An instruction to the originator's bank to originate a credit transfer
- An instruction to the trading partner to originate a debit transfer against the payor's bank account

Once this decision has been made, the 820 transports the remittance information to the beneficiary. The transfer can either be through the banking system or by a route that is separate from the transport of funds.

**Note:** *Whenever the 820 remittance information is not transferred with the funds, it can be transmitted directly from the originator to the beneficiary. It can also be transmitted through an intermediary, such as a VAN.*

## Transfer of Funds

Before funds can be applied against an open accounts receivable account, the beneficiary must reconcile the two streams—the payment advice from the receiving bank and the remittance information received through a separate channel—that were



separated during the transfer. If this reconciliation does not take place and if the amount of funds received differs from the amount indicated in the remittance advice, the beneficiary might have problems balancing the accounts receivable ledger.

The value transfer begins when the originator issues a payment order to the originator's bank. If a credit transfer is specified, the originator's bank charges the originator's bank account and pays the amount to the beneficiary's bank for credit to the beneficiary's account.

If the payment order specifies a debit transfer, the originator is the beneficiary. In this case, the beneficiary's bank originates the value transfer, and the payor's account is debited (charged) for a set amount, which is credited to the originator's (beneficiary's) bank account. The payor must issue approval to its bank to honor the debit transfer, either before the beneficiary presents the debit transfer or at the same time. This debit authorization or approval can take one of four forms:

- Individual item approval
- Blanket approval of all incoming debits with an upper dollar limit
- Blanket approval for a particular trading partner to originate any debit
- Some combination of the above

## 2.7.2 Payment-Related EDI Transactions

X12 uses an end-to-end method to route the 820 Payment Order/Remittance Advice from the originator company through the banks to the beneficiary. This means that there might be several relay points between the sender and the receiver.

The 820 is wrapped in an ACH banking transaction for the actual funds transfer between the banks.

---

## 2.8 Acknowledgment Types

X12 includes two types of acknowledgment, the TA1 Interchange Acknowledgment and the 997 Functional Acknowledgment.

### 2.8.1 TA1, Interchange Acknowledgment

The TA1 acknowledgment verifies the interchange envelopes only. The TA1 is a single segment and is unique in the sense that this single segment is transmitted without the GS/GE envelope structures. A TA1 acknowledgment can be included in an interchange with other functional groups and transactions.

### 2.8.2 997, Functional Acknowledgment

The 997 includes much more information than the TA1. The 997 was designed to allow trading partners to establish a comprehensive control function as part of the business exchange process.

There is a one-to-one correspondence between a 997 and a functional group. Segments within the 997 identify whether the functional group was accepted or rejected. Data elements that are incorrect can also be identified.

Many EDI implementations have incorporated the acknowledgment process into all of their electronic communications. Typically, the 997 is used as a functional acknowledgment to a functional group that was transmitted previously.

The 997 is the acknowledgment transaction recommended by X12.

The acknowledgment of the receipt of a payment order is an important issue. Most corporate originators want to receive at least a Functional Acknowledgment (997) from the beneficiary of the payment. The 997 is created using the data about the identity and address of the originator found in the ISA and/or GS segments.

Some users argue that the 997 should be used only as a point-to-point acknowledgment and that another transaction set, such as the Application Advice (824) should be used as the end-to-end acknowledgment.

### 0.0.1 Application Acknowledgments

Application acknowledgments are responses sent from the destination system back to the originating system, acknowledging that the transaction has been successfully or unsuccessfully completed. The application advice (824) is a generic application acknowledgment that can be used in response to any X12 transaction. However, it has to be set up as a response transaction; only TA1 and 997 transactions are sent out automatically.

Other types of responses from the destination system to the originating system, which may also be considered application acknowledgments, are responses to query transactions—for example, the Eligibility Response (271) which is a response to the Eligibility Inquiry (270). Other types of responses from the destination system to the originating system, which may also be considered application acknowledgments, are responses to query transactions—for example, the Eligibility Response (271) which is a response to the Eligibility Inquiry (270).

---

## 2.9 Key Parts of EDI Processing Logic

The five key parts of EDI processing logic are listed in Table 3. The table describes each term, and lists its language analogy along with its associated e\*Gate Collaboration scripts.

**Table 3** Key Parts of EDI Processing

Term	Description	Language Analogy	e*Gate Collaboration Scripts
structures	format, segments, loops	syntax	ETD files or structures
validations	data contents "edit" rules	semantics	validation scripts

**Table 3** Key Parts of EDI Processing

Term	Description	Language Analogy	e*Gate Collaboration Scripts
translations (also called mapping)	reformatting or conversion	translation	translation scripts
enveloping	header and trailer segments	envelopes	part of translation
acks	acknowledgments	return receipt	e*Way scripts

e\*Gate uses the structures, validations, translations, enveloping, and acknowledgments listed below to support the X12 standard.

### 2.9.1 Structures

The Event Type Definition library for X12 includes pre-built ETDs for all supported X12 versions.

To customize a message structure, use the e\*Gate GUI message structure editor, which is called the ETD (Event Type Definition) Editor.

### 2.9.2 Validations, Translations, Enveloping, Acknowledgments

e\*Gate does not include any pre-built validations, transformations, enveloping, or acknowledgments. These scripts can be built in either the Monk or Java versions of the Collaboration Rules Editor graphical user interface (GUI). These GUIs provide a user-friendly drag-and-drop front end for creating Monk or Java scripts.

However, installation of the e\*Xchange Partner Manager includes a set of custom Monk validations for HIPAA transactions.

*Note:* In e\*Gate, translations are called Collaborations.

### 2.9.3 X12 Acknowledgments in e\*Xchange Partner Manager

All X12 acknowledgments are automatically handled in e\*Xchange Partner Manager. This allows you to configure the transaction set, if any, that is expected as the acknowledgment. e\*Xchange Partner Manager can automatically create any type of X12 acknowledgment, including TA1, 997, 824, and transaction-specific acknowledgments.

For more information on X12 acknowledgment types, refer to [“Acknowledgment Types” on page 33](#).

### 2.9.4 Trading Partner Agreements

There are three levels of information that guide the final format of a specific transaction. These three levels are:

- The X12 standard

The Accredited Standards Committee publishes a standard structure for each X12 transaction.

- Industry-specific Implementation Guides

Specific industries publish Implementation Guides customized for that industry. Normally, these are provided as recommendations only. However, in certain cases, it is extremely important to follow these guidelines. Specifically, since HIPAA regulations are law, it is important to follow the guidelines for these transactions closely.

- Trading Partner Agreements

It is normal for trading partners to have individual agreements that supplement the standard guides. The specific processing of the transactions in each trading partner's individual system might vary between sites. Because of this, additional documentation that provides information about the differences is helpful to the site's trading partners and simplifies implementation. For example, while a certain code might be valid in an implementation guide, a specific trading partner might not use that code in transactions. It would be important to include that information in a trading partner agreement.

---

## 2.10 Additional Information

For more information on X12, visit the following Web sites:

- For X12 standard:

<http://www.disa.org>

- For Implementation Guides: Washington Publishing Company at

<http://www.wpc-edi.com>

**Note:** *This information is correct at the time of going to press; however, SeeBeyond has no control over these sites. If you find the links are no longer correct, use a search engine to search for X12.*

# X12 Template Installation

This chapter provides information on the installation procedure for the SeeBeyond X12 ETD library template files and shows the resulting directory structure for the templates. It includes general installation information and installation instructions.

**Note:** *If you are upgrading to version 4.5.2 from a previous version of this library, you must recompile all Collaborations that use these ETDs after installing the new version.*

The X12 ETD library includes templates for the following X12 versions.

**Table 4** X12 Versions Supported

▪ 2000 (Java only)	▪ 3032	▪ 3072 (Java only)
▪ 2001	▪ 3040	▪ 4010
▪ 2002	▪ 3041	▪ 4011
▪ 2003	▪ 3042	▪ 4012
▪ 2040	▪ 3050	▪ 4020
▪ 3010	▪ 3051	▪ 4021
▪ 3020	▪ 3052	▪ 4022
▪ 3022	▪ 3060	▪ 4030
▪ 3030	▪ 3061	▪ 4031
▪ 3031	▪ 3062	▪ 4032
	▪ 3070	▪ 4040
	▪ 3071	▪ 4041 (Java only)

Some additional points to note:

- The ETDs only accept messages with all the envelope segment information.
- Messages can be batched; however, all the messages in one functional group must be of the same message type.

---

## 3.1 X12 Libraries

When the X12 ETD Library is installed, there is a separate subdirectory for each version of X12; for example, 3020 or 4010. Within that subdirectory all the files that comprise the ETD library for that version are stored.

For more information on the folder structure for the e\*Gate X12 ETD Library, refer to [“X12 Folder Structure Created by Installation” on page 40](#).

## 3.2 Installation Procedure

This section explains how to install the X12 template files.

The X12 ETD Library is available on e\*Gate installation CDs #8 and 9. The breakdown is as shown in Table 5.

**Table 5** X12 ETD Library CDs

CD #8	CD #9
<ul style="list-style-type: none"> <li>▪ 2000 (Java only)</li> <li>▪ 2001 (Java only)</li> <li>▪ 2002</li> <li>▪ 2003</li> <li>▪ 2040</li> <li>▪ 3010</li> <li>▪ 3020</li> <li>▪ 3030</li> <li>▪ 3031</li> <li>▪ 3032</li> <li>▪ 3040</li> <li>▪ 3041</li> <li>▪ 3042</li> <li>▪ 3050</li> <li>▪ 3051</li> <li>▪ 3052</li> <li>▪ 3060</li> <li>▪ 3061</li> <li>▪ 3062</li> <li>▪ 3070</li> <li>▪ 3072</li> </ul>	<ul style="list-style-type: none"> <li>▪ Java_4041</li> <li>▪ 4010</li> <li>▪ 4011</li> <li>▪ 4012</li> <li>▪ 4020</li> <li>▪ 4021</li> <li>▪ 4022</li> <li>▪ 4030</li> <li>▪ 4031</li> <li>▪ 4032</li> <li>▪ 4040</li> <li>▪ 4041 (Java only)</li> </ul>

### Before you begin:

- You must have Administrator privileges to install back-end components such as the X12 templates.
- Exit all Windows programs, including any anti-virus applications.
- Verify your e\*Gate registry host name, schema name, control broker logical name, and the administrator user name and password.
- Define which X12 templates you want to install.

### To install the X12 templates on Windows

- 1 Log in on the workstation on which you want to install the X12 templates.
- 2 Insert the appropriate X12 installation CD into the CD-ROM drive. For more information, refer to Table 5.

If Autorun is enabled, the setup program automatically starts. Otherwise:

- ♦ On the task bar, click the **Start** button, and then click **Run**.
- ♦ In the **Open** field, type **D:\setup\setup.exe** where **D:** is your CD-ROM drive.

- 3 Follow the installation instructions until you come to the **Please choose the product to install** dialog box.
- 4 Select **e\*Gate Integrator**, and then click **Next**.
- 5 Follow the on-screen instructions until you come to the second **Please choose the product to install** dialog box.
- 6 Select **Add-ons**, and then click **Next**.
- 7 Follow the on-screen instructions until you come to the **Select Components** screen.
- 8 Highlight (but do not check) **ETD Libraries**, and then click the **Change** button. The **Select Sub-components** dialog box appears.
- 9 Select the X12 version or versions for which you need the template files.
- 10 Click **Continue** to return to the **Select Components** dialog box, and then click **Next**.
- 11 Follow the rest of the on-screen instructions to install the X12 templates.

**Note:** *Installing the X12 ETD library might take quite some time depending on the speed of the machine and the number of templates you install.*

For more information about e\*Gate installation, see the *e\*Gate Integrator Installation Guide*.

**Note:** *Do not change the default directory location for the X12 template files.*

#### To install the X12 templates on UNIX

- 1 Follow the steps for the standard e\*Gate installation.  
For more information, refer to the *e\*Gate Integrator Installation Guide*.
- 2 At the prompt **Choose e\*Gate Add-on Application**, enter the number assigned for the X12 Library for the version you want (scroll down the list to check the number).
- 3 Enter the installation path, or press Enter to accept the default path (recommended).
- 4 Enter the hostname of the registry server (UNIX host).  
The library is installed.
- 5 Conditional: if you need to install more than one X12 version, repeat steps 2 through 4 as needed.

---

## 3.3 X12 Files and Folders

This section outlines the folder structure created on your hard drive as a result of installation of the X12 templates, and the files copied into those folders.

### 3.3.1 X12 Folder Structure Created by Installation

By default, installation places the X12 templates in the locations shown in Table 6.

**Table 6** X12 Template Locations

These files...	Are installed in this location...
Java	\eGate\Server\Registry\Repository\default\ETD\templates\X12
Monk	\eGate\Server\Registry\Repository\default\Monk_Scripts\templates\X12


Installation commits the templates to the **default** schema on the Registry Host that you specified during the installation process.

Within the template directory, there is a subdirectory for each version of X12 that was selected during installation. Within each subdirectory, there is an .ssc file for each X12 transaction.

Under each version directory there is a **templates** subdirectory for segment templates. All messages are in the version directory. All segments are in the template directory, as illustrated in [Figure 16 on page 42](#).

Figure 14 shows an example of the directory structure for the X12 templates when all versions have been installed.

**Figure 14** X12 Version Folders

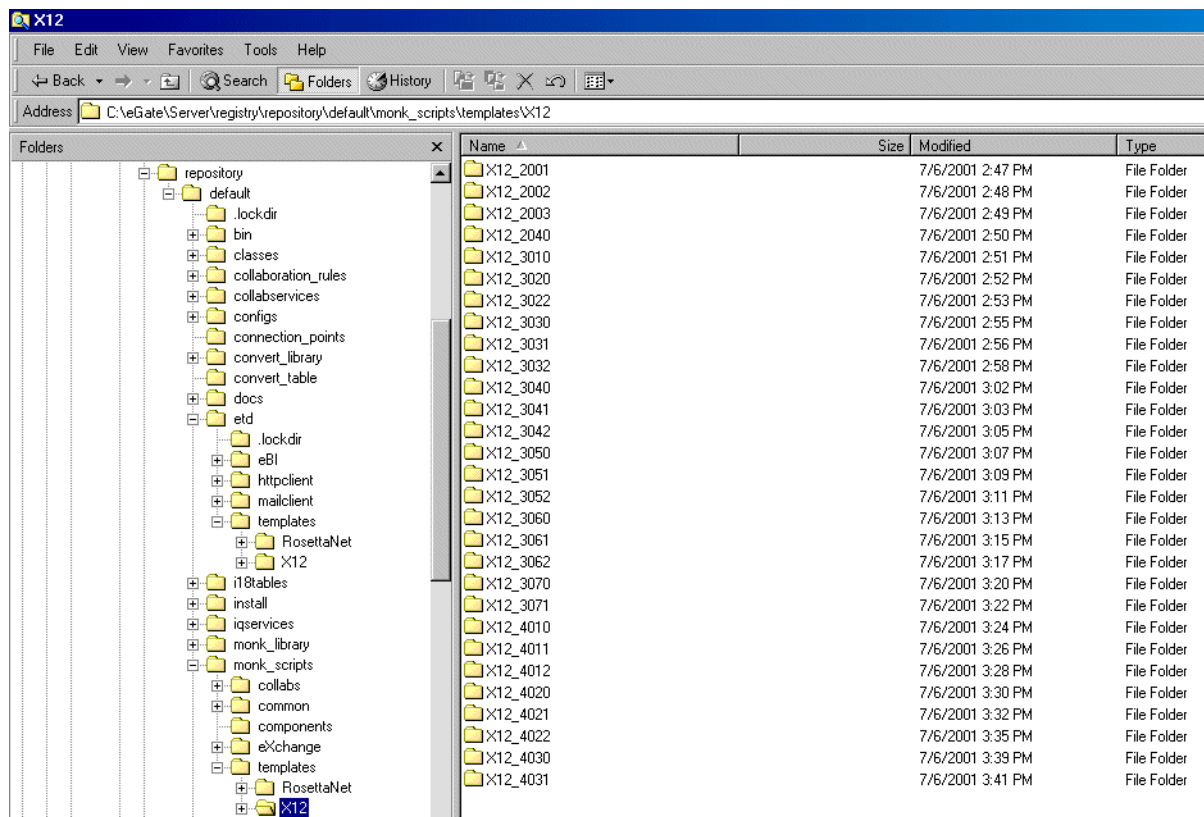




UNIX installation places the files in the same folder structure shown above.

### 3.3.2 X12 Files

Since there is a file for each X12 transaction and a file for each segment, installation of each version of X12 includes a large number of files.

Figure 15 shows some of the files that are installed for a specific version of X12 (Version 4020) Java.

**Figure 15** Transaction Set Structures for X12 Version 4020 (Java)

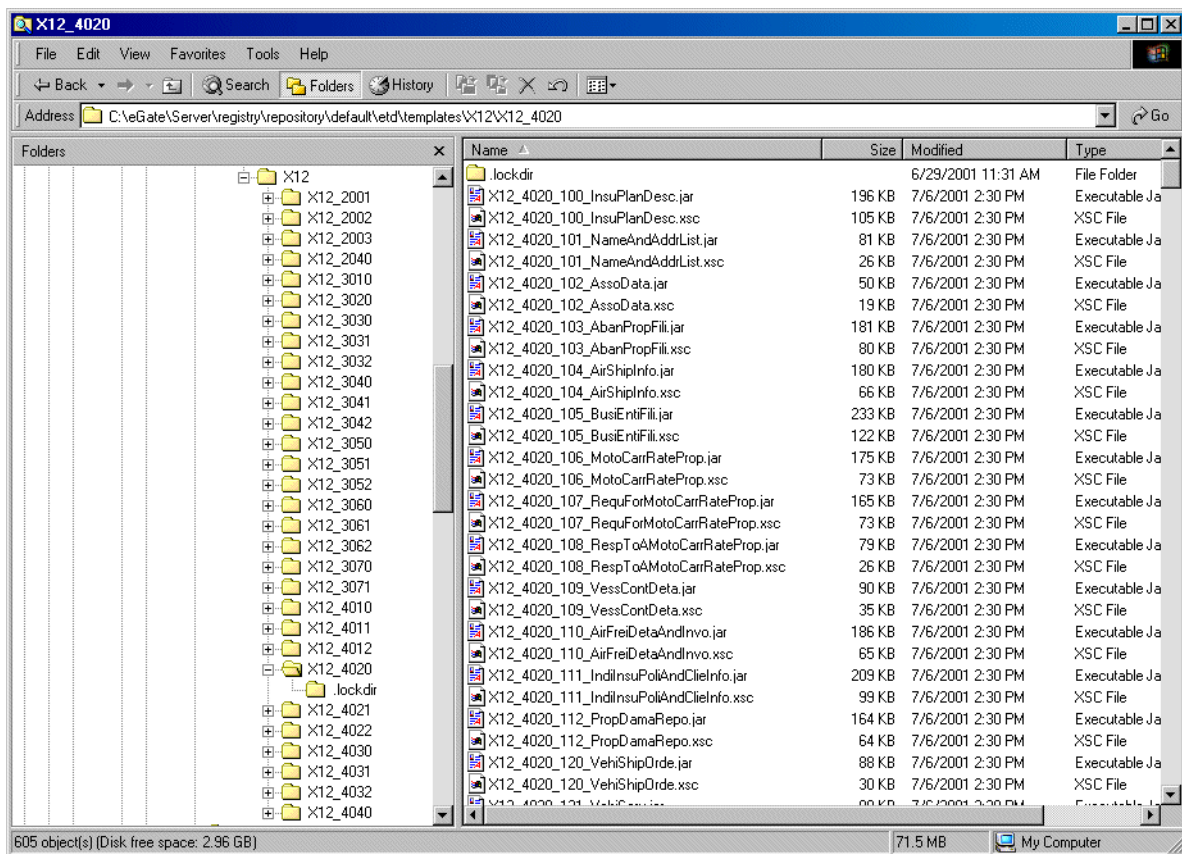


There is an Event Type Definition file for each of the individual transactions that comprise the selected version of the standard. These files have the extension **xsc** for Java, **ssc** for Monk.

**Note:** When building Collaboration Rules scripts with Java ETDs, if there is data mapped to a field in a Java template and there are optional fields on the same level with no data mapped to them, the output includes delimiters for the optional fields.

Figure 16 shows the files in the Templates subdirectory for X12 Version 4020 Monk.

**Figure 16** Segment Template Files for X12 Version 4020 Monk

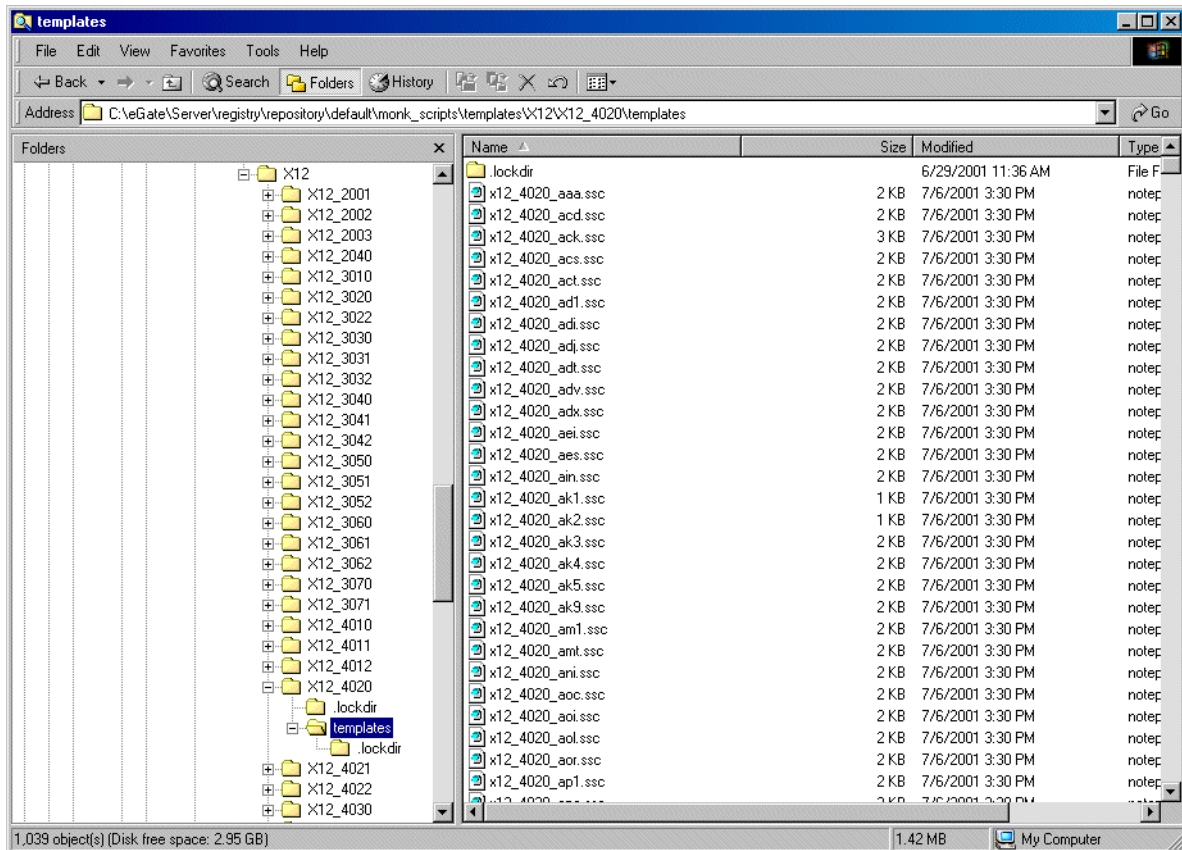

### 3.3.3 File Names

The file names for the X12 templates are designed to assist you in quickly locating the file you want.

#### Transaction Template File Names—Monk

The file name for each transaction template is comprised of the same set of elements in the same sequence. The file names are constructed as follows:

- X12\_ (name of standard followed by underscore)
- 4010\_ (name of version followed by underscore)
- 997 (name of message)
- .ssc (file extension)

Examples:

- The Monk file name for a 270, Eligibility Coverage or Benefit Inquiry, for version 4010 is **X12\_4010\_270.ssc**.
- The Monk file name for a 855, Purchase Order Acknowledgment, in version 3020 is **X12\_3020\_855.ssc**.

## Segment Template File Names—Monk

Segment templates are located in the `\templates` subdirectory to the main directory for the X12 version.

The file name for each segment template is comprised of the same set of elements in the same sequence. Where the transaction segment template file names include the transaction number, the segment files include the segment ID.

The file names are constructed as follows:

- X12\_ (name of standard followed by underscore)
- 4010\_ (name of version followed by underscore)
- aaa (segment ID)
- .ssc (file extension)

Examples:

- The Monk file name for segment AAA, Request Validation, for version 4010 is `X12_4010_aaa.ssc`.
- The Monk file name for segment AK5, Transaction Set Response Trailer, in version 3020 is `X12_3020_ak5.ssc`.

## Transaction Template File Names—Java

The file name for each transaction template is comprised of the same set of elements in the same sequence. The file names are constructed as follows:

- X12\_ (name of standard followed by underscore)
- 4010\_ (name of version followed by underscore)
- 997 (name of message)
- Abbreviation for the transaction name
- .xsc (file extension)

Examples:

- The Java file name for a 270, Eligibility Coverage or Benefit Inquiry, for version 4010 is `X12_4010_270_EligCoveOrBeneInqu.xsc`.
- The Java file name for an 855, Purchase Order Acknowledgment, in version 3020 is `X12_3020_855_PurcOrdeAckn.xsc`.


---

## 3.4 Customizing a Monk Message Structure

If you need to customize a Monk message structure, you can edit it in the e\*Gate ETD Editor.

**Note:** *You cannot customize the Java message structures.*

### To edit a message structure in e\*Gate

- 1 With the **ETD Editor** window open, click **Open**  on the Toolbar.
- 2 When the **Open Event Type Definition** dialog box opens, click **Templates**.
- 3 Navigate to the X12 directory.
- 4 Select a version directory (such as **X12\_4010**) and click **Open**.
- 5 Select a message (such as **X12\_4010\_997.ssc**) and click **Open**.  
The message opens in both the **Template Library** and the **Workspace** panes.
- 6 From the **Edit** menu, choose **Find**.
- 7 In the **Find** text box, type the name of the segment you want to find within the message, and click **Next**.  
If the segment is present, it is highlighted.

- 8 To delete the segment, click either **Delete**  or **Cut**  on the Toolbar.

**Note:** *If you want to do further editing of the ETD, refer to the ETD Editor online Help system for instructions.*

- 9 When done, click **Save**  to save your work.

## Working With the X12 ETDs

This chapter provides information on additional features built into the X12 ETDs, and instructions on working with the ETDs and on testing them.


To test that your data is being mapped correctly by the ETD, and that the data is valid based on definitions and business rules, you can run validation within the Collaboration Rules component.

This chapter also provides information on using the custom Java methods provided within the ETDs, and other general information about using the X12 ETD Library.

### 4.1 Viewing an X12 ETD in the ETD Editor

An example of an X12 270 transaction in the Java ETD Editor is shown in Figure 17.

**Figure 17** X12 270 In the ETD Editor

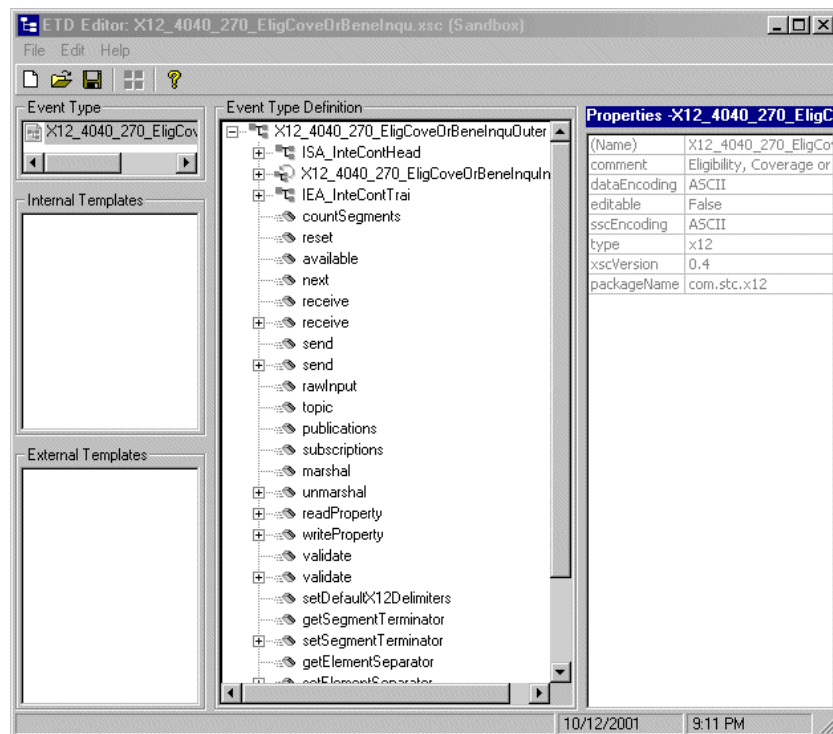

The ETD shown in Figure 17 is `x12_4040_270_EligCoveOrBeneInqu.xsc`. The root node is `x12_4040_270_EligCoveOrBeneInquOuter`. For each X12 ETD, the root node name is the same as the file name, but without the extension, and with **Outer** appended to the file name.

Some things to note about X12 Java ETDs:

- Bubble text labels are available for some of the items.
- In the `.xsc` file, the following naming conventions apply:
  - ◆ An element name begins with **E**
  - ◆ A segment loop name begins with **Loop**

---

## 4.2 Setting the Delimiters

The X12 ETDs must include some way for delimiters to be defined so that they can be mapped successfully from one ETD to another.

In X12, delimiters are specified in the interchange header segment (ISA).

The delimiters are as follows:

- Data Element Separator (default is an asterisk)
- Subelement Separator/Component Element Separator (default is a colon)
- Repetition Separator (version 4020 and later) (default is a plus sign)
- Segment Terminator (default is a tilde)

These delimiters can be set in two ways:

- You can set the Subelement Separator (and Repetition Separator) from the corresponding elements within the ISA segment.
- You can set the delimiters in the Collaboration Editor by means of Java methods that are provided in the ETD files.


For specific information on the Java methods provided for the getting and setting of delimiters, refer to [“X12 ETD Library Java Methods” on page 54](#).

If the input data is already in X12 format, you can use the “get” methods to get the delimiters from the input data. If the Collaboration is putting the data into X12 format, you can use the “set” methods to set the delimiters in the output ETD.

### to set the delimiters in the Collaboration Rules Editor

- 1 Open the Collaboration in the Java Collaboration Rules Editor.
- 2 In the Business Rules section, add a rule.
- 3 Click on the method that you want to use.
- 4 Drag and drop to the Rule Properties section (an example is shown in Figure 18).

**Figure 18** Setting Delimiters in a Collaboration Rules Component

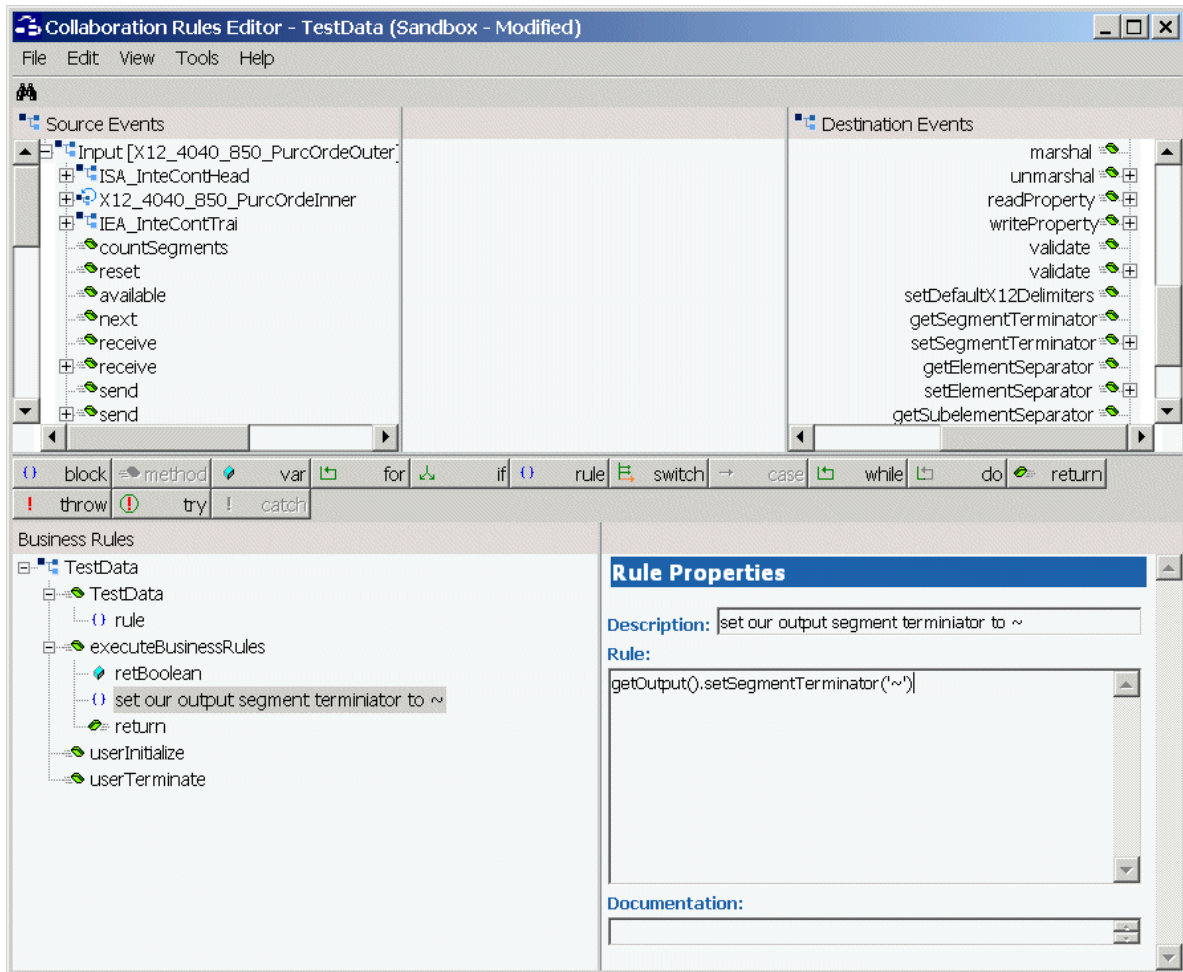


- 5 The Parameters for Method dialog box appears (see Figure 19).

**Figure 19** Parameters for Method Dialog Box



- 6 Set the delimiter value (an example is shown in Figure 20).

**Figure 20** Parameters for Method Dialog Box Showing Delimiter Value

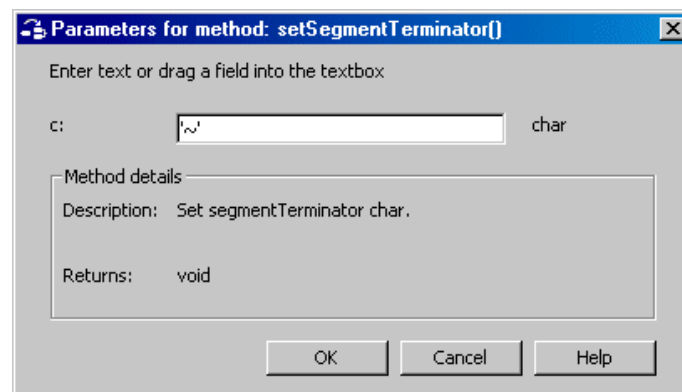

- 7 Click **OK**.
- 8 Save the Collaboration Rules component.

**Note:** You *must* specify the delimiters. You can do this either by setting individual delimiters to specific values, or by using the `setDefaultX12delimiters` Java method to set the defaults.

---

## 4.3 Running Validation in the Collaboration Rules Component

An additional tool you can use for validating your data is to run one of the validation methods within the Collaboration.



The X12 ETD Library includes two Java methods provided for this purpose. They are as follows:

- validate
- validate(boolean)

For more information on these Java methods, refer to [“X12 ETD Library Java Methods” on page 54](#).

### 4.3.1 Creating a Collaboration Rule to Validate the ETD

The elements that are part of an .xsc file can be dragged and dropped when two or more .xsc files are opened in the Collaboration Rules Editor (see the *e\*Gate Integrator User’s Guide* for more information). A field in the Source pane can be dragged to a field in the Destination Events pane. This action, when highlighted in the Business Rules pane, displays the rule in the Rule Properties pane.

The “validate” method nodes in an .xsc file can be used to validate an X12 message at run time. The methods return a string containing descriptions about any invalid data elements, segments, segment loops, envelopes, and so forth.

It also performs specific validations on the Interchange Group and Functional Group envelopes, and outputs any invalid information into the output string, as follows:

- Checks that the control numbers in the ISA and IEA segments match.
- It checks the number of transactions and verifies that against the transaction count value provided in the GE01 segment of the Functional Group trailer (GE).
- validates the transaction count; checks the number of transactions and checks it against the count provided, says the transaction is invalid if they don't match.

The function returns a string. You can choose how to direct the output of the string; for example, to a log file.

*Note:* Although validation is a useful tool to ensure that data conforms to the definitions and business rules, be aware that it significantly impacts performance.

---

## 4.4 Alternative Formats: ANSI and XML

All the X12 ETDs accept either standard ANSI X12 format or XML format as input, by default; no changes to the existing Collaborations are needed.

However, if you are using ETDs from previous releases, you must recompile your Collaborations after installing the 4.5.2 version of the X12 ETD Library.

By default, output is ANSI. However, there are two new Java Methods available for setting the output to XML:

- setXMLOutput (boolean isXML)

If the Collaboration is set to automatically publish (the default), set the argument to true to automatically publish XML output.

- marshal (boolean isXMLOutput)

If the Collaboration is set to manual publication (via the **Manual Publish** check box in the Collaboration Rules component), set the argument to true to manually publish XML output.

#### 4.4.1 XML Format for X12

Since there is no de facto XML standard for X12 as yet, the SeeBeyond X12 ETD Library uses Open Business Objects for EDI (OBOE) as the XML format for X12.

The XML X12 DTD is shown in Figure 21.

**Figure 21** XML X12 DTD

```
<!ELEMENT envelope (segment, segment?, functionalgroup+, segment)>
<!ATTLIST envelope format CDATA #IMPLIED>

<!ELEMENT functionalgroup (segment, transactionset+, segment)>

<!ELEMENT transactionset (table+)>
<!ATTLIST transactionset code CDATA #REQUIRED>
<!ATTLIST transactionset name CDATA #IMPLIED>

<!ELEMENT table (segment)+>
<!ATTLIST table section CDATA #IMPLIED>

<!ELEMENT segment ((element | composite)+, segment*)>
<!ATTLIST segment code CDATA #REQUIRED>
<!ATTLIST segment name CDATA #IMPLIED>


<!ELEMENT composite (element)+>
<!ATTLIST composite code CDATA #REQUIRED>
<!ATTLIST composite name CDATA #IMPLIED>

<!ELEMENT element (value)>
<!ATTLIST element code CDATA #REQUIRED>
<!ATTLIST element name CDATA #IMPLIED>

<!ELEMENT value (#PCDATA)>
<!ATTLIST value description CDATA #IMPLIED>
```


Figure 22 shows an X12 997 Functional Acknowledgment, in XML format.

**Figure 22** X12 997 Functional Acknowledgment—XML

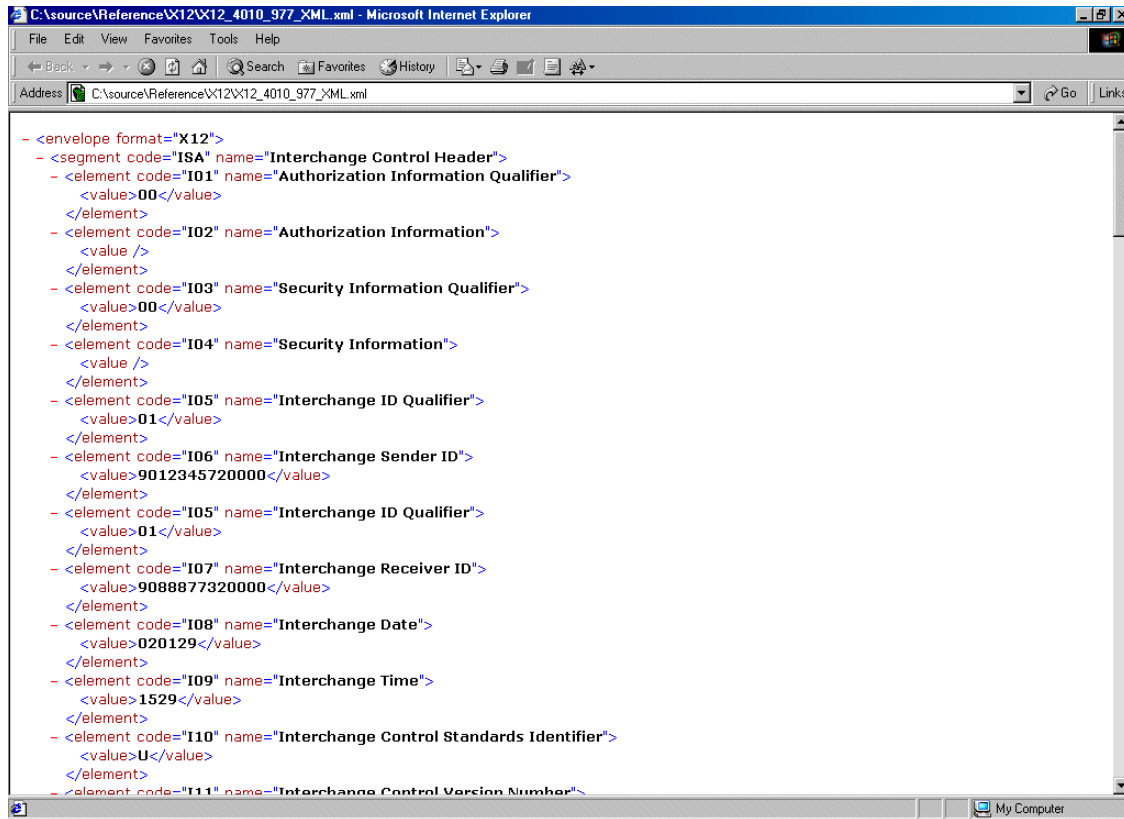

An example of the same transaction, an X12 997 Functional Acknowledgment, using standard ANSI format, is shown in Figure 23.

**Figure 23** X12 997 Functional Acknowledgment—ANSI Format

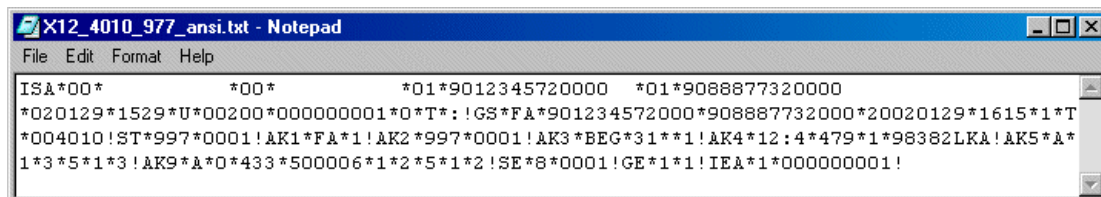

#### 4.4.2 Setting the Collaboration to XML Output

By default, output from a Collaboration that uses standard Events from the X12 ETD Library is in ANSI X12 format.

If you want to set the Collaboration to output XML format, use one of the following two new Java methods:

- `setXMLOutput` (boolean `isXML`) with the argument set to true if the outbound X12 ETD is set to automatically publish.

- marshal (boolean isXMLOutput) with the argument set to true if the outbound X12 ETD is set to manually publish.

Figure 24 shows an X12 Collaboration. A rule is being added to the Collaboration to set the output to XML.

**Figure 24** Setting the Output to XML in the X12 Collaboration


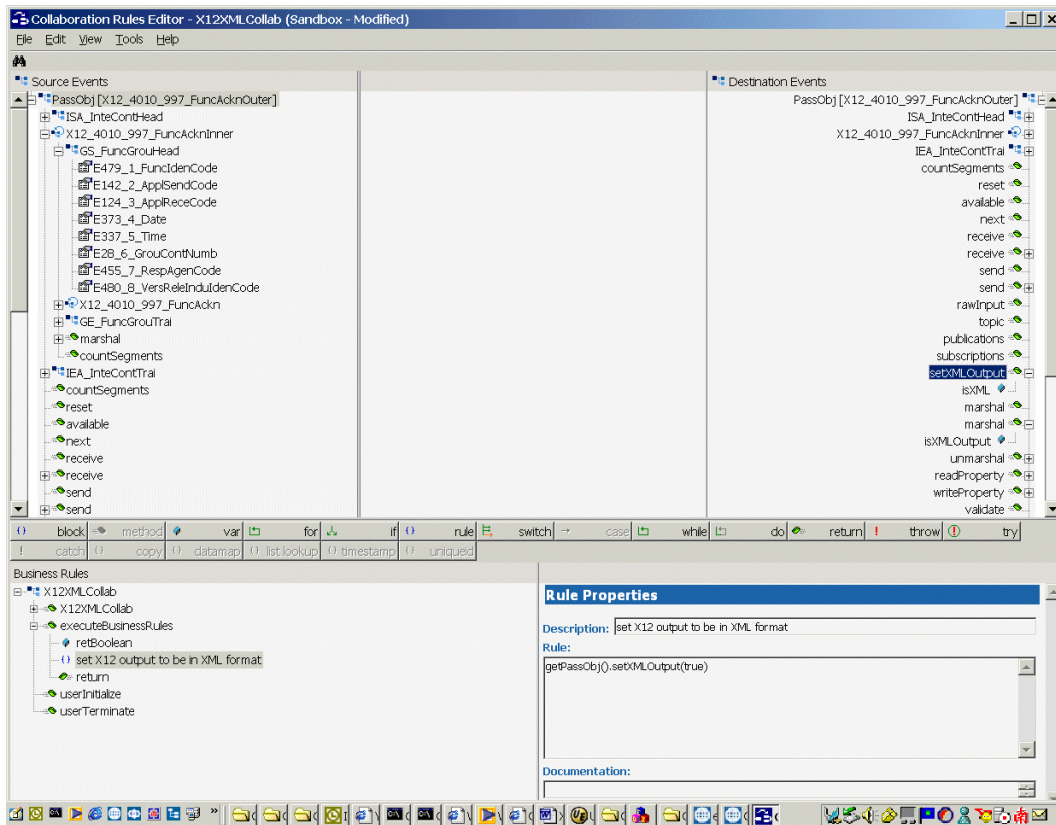


Figure 25 shows the parameter for setXMLOutput ( ) being set.

**Figure 25** Specifying the Parameter for setXMLOutput ( )

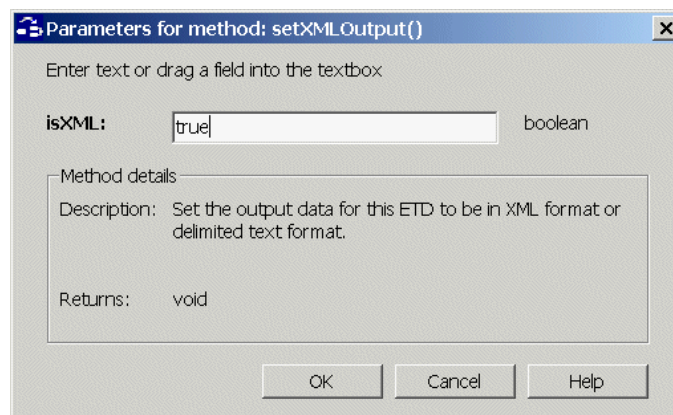

---

## 4.5 Possible Differences in Output When Using Pass-Through

If you are using pass-through, the output file contains essentially the same data as the input file. However, certain differences, based on variations in acceptable interpretation of the information, are acceptable, provided that the data conforms to the formats specified for the elements. For example:

- If the input file includes a six-digit date, the output file might represent this as an eight-digit value. For example, 010420 in the input file might be represented as 20010420 in the output file.
- The number of trailing zeros after a decimal point might vary. For example, an input value of 10.000 might be represented as 10 in the output file.

The actual value of all the information must remain the same.

# X12 ETD Library Java Methods

The X12 ETD Library contains Java methods that are used to extend the functionality of the ETDs. These methods allow you to get the X12 delimiters from the input ETD and set them appropriately for the output ETD; or to set the delimiters to the defaults.

The methods are:

- [setDefaultX12Delimiters](#) on page 54
- [getSegmentTerminator](#) on page 55
- [setSegmentTerminator](#) on page 56
- [getElementSeparator](#) on page 56
- [setElementSeparator](#) on page 57
- [getSubelementSeparator](#) on page 57
- [setSubelementSeparator](#) on page 58
- [getRepetitionSeparator](#) on page 59
- [setRepetitionSeparator](#) on page 59

The X12 ETD Library also includes the following custom Java methods for testing the validation Collaboration:

- [validate \(no parameters\)](#) on page 60
- [validate \(boolean parameter\)](#) on page 61

In addition, the library includes the following functions for setting the output of a Collaboration to XML:

- [setXMLOutput \(boolean isXML\)](#) on page 61
- [marshal \(boolean parameter\)](#) on page 62

---

## setDefaultX12Delimiters

### Description

Sets the default X12 delimiters.

### Syntax

```
public void setDefaultX12Delimiters()
```

### Parameters

None.

### setDefaultX12Delimiters Constants

None.

### Returns

void (none).

### Throws

None.

### Examples

```
com.stc.x12_4010.X12_4010_850_PurcOrdeOuter myETD=new com.stc.x12_4010.X12_4010_850_PurcOrdeOuter();
.....
.....
myETD.setDefaultX12Delimiters();
```

---

## getSegmentTerminator

### Description

Gets the segmentTerminator character.

### Syntax

```
public char getSegmentTerminator()
```

### Parameters

None.

### getSegmentTerminator Constants

None.

### Returns

**char**

Returns the segment terminator character.

### Throws

None.

### Examples

```
com.stc.x12_4010.X12_4010_850_PurcOrdeOuter myETD=new com.stc.x12_4010.X12_4010_850_PurcOrdeOuter();
.....
.....
char segTerm=myETD.getSegmentTerminator();
```

---

## setSegmentTerminator

### Description

Sets the segmentTerminator character.

### Syntax

```
public void setSegmentTerminator(char c)
```

### Parameters

Name	Type	Description
c	char	The character to be set as the segment terminator.

### setSegmentTerminator Constants

None.

### Returns

void (none).

### Throws

None.

### Examples

```
com.stc.x12_4010.X12_4010_850_PurcOrdeOuter myETD=new com.stc.x12_4010.X12_4010_850_PurcOrdeOuter();  
.....  
.....  
char c='~';  
myETD.setSegmentTerminator(c);
```

---

## getElementSeparator

### Description

Gets the elementSeparator character.

### Syntax

```
public char getElementSeparator()
```

### Parameters

None.

### getElementSeparator Constants

None.

### Returns

**char**

Returns the element separator character.



### Throws

None.

### Examples

```
com.stc.x12_4010.X12_4010_850_PurcOrdeOuter myETD=new com.stc.x12_4010.X12_4010_850_PurcOrdeOuter();
.....
.....
char elmSep=myETD.getElementSeparator();
```

---

## setElementSeparator

### Description

Sets the elementSeparator character.

### Syntax

```
public void setElementSeparator(char c);
```

### Parameters

Name	Type	Description
c	char	The character to be set as the element separator.

### setElementSeparator Constants

None.

### Returns

void (none).

### Throws

None.

### Examples

```
com.stc.x12_4010.X12_4010_850_PurcOrdeOuter myETD=new com.stc.x12_4010.X12_4010_850_PurcOrdeOuter();
.....
.....
char c='+';
myETD.setElementSeparator(c);
```

---

## getSubelementSeparator

### Description

Gets the subelementSeparator character.

### Syntax

```
public char getSubelementSeparator()
```

### Parameters

None.

### getSubelementSeparator Constants

None.

### Returns

**char**

Returns the getSubelement character.

### Throws

None.

### Examples

```
com.stc.x12_4010.X12_4010_850_PurcOrdeOuter myETD=new com.stc.x12_4010.X12_4010_850_PurcOrdeOuter();  
.....  
.....  
char subeleSep=myETD.getSubelementSeparator();
```

---

## setSubelementSeparator

### Description

Sets the SubelementSeparator character.

### Syntax

```
public void setSubelementSeparator(char c)
```

### Parameters

Name	Type	Description
c	char	The character to be set as the subelement separator.

### setSubelementSeparator Constants

None.

### Returns

void (none).

### Throws

None.

### Examples

```
com.stc.x12_4010.X12_4010_850_PurcOrdeOuter myETD=new com.stc.x12_4010.X12_4010_850_PurcOrdeOuter();  
.....  
.....  
char c=':';  
myETD.setSubelementSeparator(c);
```

---

## getRepetitionSeparator

### Description

Gets the RepetitionSeparator character.

### Syntax

```
public char getRepetitionSeparator()
```

### Parameters

None.

### getRepetitionSeparator Constants

None.

### Returns

**char**

Returns the getRepetitionSeparator character.

### Throws

None.

### Examples

```
com.stc.x12_4010.X12_4010_850_PurcOrdeOuter myETD=new com.stc.x12_4010.X12_4010_850_PurcOrdeOuter();  
.....  
.....  
char repSep=myETD.getRepetitionSeparator();
```

---

## setRepetitionSeparator

### Description

Sets the RepetitionSeparator character.

### Syntax

```
public void setRepetitionSeparator(char c)
```

### Parameters

Name	Type	Description
c	char	The character to be set as the repetition separator.

### setRepetitionSeparator Constants

None.

### Returns

void (none).

## Throws

None.

## Examples

```
com.stc.x12_4010.X12_4010_850_PurcOrdeOuter myETD=new com.stc.x12_4010.X12_4010_850_PurcOrdeOuter();
.....
.....
char c='*';
myETD.setRepetitionSeparator(c);
```

---

## validate (no parameters)

### Description

Validates the ETD content in memory.

For example, if one of the nodes populated in the ETD has an inappropriate value, this method outputs a string such as the following.

```
X12_4010_850_PurcOrdeOuter.X12_4010_850_PurcOrdeInner[0].X12_4010_850_PurcOrde[0].CUR_msk1_3_Curr.E280_3_ExchRate[0]: Value [0.2939] not in the VALLIST list of [850/3///3] as specified in semantic rule [850/3///3=[...:LOCALCODE:1:]]
```

If there are no problems with the ETD content, the output is a null string.

### Syntax

```
public String validate()
```

### Parameters

None.

### validate Constants

None.

### Returns

#### String

A description of the errors in the data. If there are no errors, the string is null.

### Throws

None.

## Examples

```
com.stc.x12_4010.X12_4010_850_PurcOrdeOuter myETD=new com.stc.x12_4010.X12_4010_850_PurcOrdeOuter();
.....
.....
string msg=myETD.validate();
```

---

## validate (boolean parameter)

### Description

Validates the ETD content, either immediately after unmarshaling or in memory.

When used with the parameter set to false, this method works in the same way as validate (with no parameters).

However, when the parameter is set to true, this method can be used to validate length information in the input data file.

For example, if the ETD expects a six-digit date and the input data provides an eight-digit date, this method outputs a string such as the following:

```
X12_3010_840_RequForQuotOuter.X12_3010_840_RequForQuotInner[0].GS_FuncGrouHead.E29_4_GrouDate: Its length of [8] is more than required max of [6].
```

### Syntax

```
public String validate(boolean original)
```

### Parameters

Name	Type	Description
original	boolean	If true, validates the ETD content right after unmarshaling. If false, validates the ETD in memory.

### validate Constants

None.

### Returns

#### String

A description of the errors in the data. If there are no errors, the string is null.

### Throws

None

### Examples

```
com.stc.x12_4010.X12_4010_850_PurcOrdeOuter myETD=new com.stc.x12_4010.X12_4010_850_PurcOrdeOuter();  
.....  
.....  
string msg=myETD.validate(true);
```

---

## setXMLOutput (boolean isXML)

### Description

When used with the parameter set to true, this method causes the X12 ETD involved to output XML.

When used with the parameter set to false, this method causes the X12 ETD to output ANSI (which is the default output if this method is not used at all).

Use this method when the X12 ETD is set to automatic output (the default). If the Collaboration is set to manual output, use marshal (boolean) to achieve the same result.

### Syntax

```
public void setXMLOutput(boolean isXML)
```

### Parameters

Name	Type	Description
isXML	boolean	If true, the X12 is output in XML format. If false, output is standard ANSI X12.

### validate Constants

None.

### Returns

void (none).

### Throws

None

### Examples

```
com.stc.x12_4010.X12_4010_850_PurcOrdeOuter myETD=new com.stc.x12_4010.X12_4010_850_PurcOrdeOuter();  
.....  
.....  
myETD.setXMLOutput(true);
```

---

## marshal (boolean parameter)

### Description

When used with the parameter set to true, this method generates the output byte array in XML format.

When used with the parameter set to false, this method generates the output byte array in ANSI format.

Use this method when the ETD is set to manual output. If the ETD is set to automatic output (the default), use setXMLOutput (boolean parameter) to achieve the same result.

### Syntax

```
public byte[] marshal(boolean isXMLOutput)
```

### Parameters

Name	Type	Description
isXMLOutput	boolean	If true, the X12 is output in XML format. If false, output is standard ANSI X12.

### validate Constants

None.

### Returns

**byte []**

The output in byte array format.

### Throws

None

### Examples

```
com.stc.x12_4010.X12_4010_850_PurcOrdeOuter myETD=new com.stc.x12_4010_850_PurcOrdeOuter();  
.....  
.....  
byte[] output=myETD.marshal(true);
```

# Implementation Tips

This appendix includes additional information that might be useful to you in an X12 implementation.

It provides information on how you can run a command-line Java ETD tester that is provided for the purpose. This allows you to test one or more input data files outside the e\*Gate environment, to make sure the data is in the correct format to be successfully mapped by the ETD structures.

**Note:** *To simply test that an input data file is correctly mapped to an X12 ETD, you can also use the ETD Editor's "Run Test" utility. For more information, refer to the e\*Gate Integrator User's Guide.*

---

## 5.1 Running the Command-Line Java Tester

The command-line utility allows you to test an input data file against the ETD. If the data is mapped correctly, the output file should very closely match the input data file, although there might be some insignificant differences.

**Note:** *The input file must include all envelope segments (ISA/IEA interchange control header and trailer, and GS/GE functional group header and trailer) as well as the ST/SE transaction set header and trailer segments.*

You must make adjustments to your classpath in order to run the utility.

For each X12 transaction, the ETD library includes two files, the .xsc file and the .jar file; for example for a Version 4010 850 (Purchase Order transaction) the ETD library includes X12\_4010\_850\_PurcOrde.xsc and X12\_4010\_850\_PurcOrde.jar.

The tester performs the following steps, in sequence:

- 1 Maps (unmarshals) the input data into the ETD structure.
- 2 Validates the data, and outputs a string description of any invalid data found.

Specifically, it checks for correct data type, min/max values, optionality (whether a value is optional or required) and codelist (if there is a specific list of acceptable values, checks that the value is on the list). It also checks for matched control numbers and counts within the envelopes.



- 3 Outputs data (from the ETD mapped in the first step) into an output file that should mirror the content of the input file.

### 5.1.1 Setting the Classpath

The command-line utility requires certain files in the classpath. You can add them to the classpath environment variable before running the utility, or you can set them and run the utility in one action by using the “-classpath” option of the Java utility.

To change the classpath environment variable from a command line, type **set classpath=**.

The five .jar files required to be in the classpath for this utility to run are:

- The input file; for example, **X12\_4010\_PurcOrde.jar**
- **stcjs.jar**. By default this is in `\egate\client\classes`
- **xerces.jar** (used for XML parsing). By default this is in `\egate\client\bin\java`
- **gnu-regexp-1.1.1.jar**. By default this is in `\egate\client\bin\java`
- The shared segments/composites .jar file, **X12\_nnnn\_AllSegsComs.jar**, for the X12 version you are working with. This is located in the templates folder for that version. For example, for version 4010, it would be:

```
\eGate\Server\registry\repository\default\etd\templates\X12\
X12_4010\X12_4010_AllSegsComs.jar
```

*Note:* If you are running the utility on Windows, use semicolons to separate the strings and backslashes in the pathnames. If you are running on UNIX, use colons to separate the strings and forward slashes in the pathnames.

### 5.1.2 Syntax

The basic syntax for the X12 command-line utility, with the classpath already set, is as follows:

```
java com.stc.x12_4010[root node name from input file] [input file] [output file]
```

If you set the classpath and run the utility at the same time, it is as follows:

```
java -classpath [classpath settings of these files including full paths: input
template .jar file, shared segments/composites .jar file for the version, stcjs.jar,
xerces.jar, gnu-regexp-1.1.1.jar] com.stc.x12_4010.<input ETD name, for example
X12_4010_850_PurcOrdeOuter> <input file path and name> <output file path and
name> [A or X (optional switch to indicate A for ANSI or X for XML)].
```

### 5.1.3 Example

An actual example for the version 4010 850 Purchase Order transaction, is shown below in two versions:

- With the classpath already set

- Setting the classpath and run the command both at the same time.

## Running the utility with the classpath already set

if the classpath is already set and you are running the utility on a Windows platform, the command might be as follows:

```
java  
com.stc.x12_4010.X12_4010_850_PurcOrdeOuter c:\X12_test\X12_4010_850.txt  
output.dat A
```

## Setting the classpath and running the utility

If you are setting the classpath and running the utility both at the same time, on a Windows platform, the command might be as follows:

```
java -classpath c:\eGate\Server\registry\repository\default\etd\templates\  
X12\X12_4010\X12_4010_850_PurcOrde.jar;C:\eGate\Server\registry\repositor  
y\default\etd\templates\X12\X12_4010\X12_4010_AllSegsComs.jar;c:\eGate\c  
lient\classes\stcjcs.jar;c:\egate\client\bin\java\xerces.jar;c:\egate\client\bin\  
java\gnu-regexp-1.1.1.jar com.stc.x12_4010.X12_4010_850_PurcOrdeOuter c:\_wo  
rk\sef\data\X12_4010_850.txt output.dat A
```

This example produces an output file named **output.dat** which you can open with a text editor to verify that it mirrors the content of the input file.

# Index

## A

acknowledgments 33, 34  
     functional acknowledgment (997) 33  
     interchange acknowledgment (TA1) 33  
     receipt of payment order 34  
 acknowledgments, handling of 35

## B

backward compatibility 21

## C

compatible systems 8  
 control numbers 20  
     functional group control number (GS06) 21  
     interchange control number (ISA13) 20  
     transaction set control number (ST02) 21  
 customizing a message structure in the ETD Editor 43

## D

data element separator 13  
 data elements 12  
 delimiters 12  
     data element separator 13  
     segment terminator 13  
     subelement (component) separator 13  
 document overview 8

## E

EDI  
     payment processing overview 31  
     usage example 30  
 enveloping 34  
 ETDs, testing 45–53  
 example of EDI usage 30

## F

file names 42  
 files and folders 39

files created by installation 41  
 functional acknowledgments (997) 33  
 functional group 18  
 functional group control number (GS06) 21

## G

getElementSeparator 56  
 getRepetitionSeparator 59  
 getSegmentTerminator 55  
 getSubelementSeparator 57  
 GS06 (functional group control number) 21

## I

implementation  
     acknowledgments 34  
     enveloping 34  
     structures 34  
     translations 34  
     validations 34  
 implementation tips 64–66  
 installation 38–39  
 installation procedure 38  
 intended reader 8  
 interchange acknowledgment (TA1) 33  
 interchange control number (ISA13) 20  
 interchange envelope 19  
 ISA13 (interchange control number) 20

## J

Java 40  
 Java files 8  
 Java methods 54–63  
     getElementSeparator 56  
     getRepetitionSeparator 59  
     getSegmentTerminator 55  
     getSubelementSeparator 57  
     marshal (boolean parameter) 62  
     setDefaultX12Delimiters 54  
     setElementSeparator 57  
     setRepetitionSeparator 59  
     setSegmentTerminator 56  
     setSubelementSeparator 58  
     setXMLOutput 61  
     validate (boolean parameter) 61  
     validate (no parameters) 60

## L

libraries 37  
 loops 12

## M

- marshal (boolean parameter) 62
- message list 21
- message structure, customizing 43
- messages
  - X12 transactions included in version 4010 21
- Monk files 8

## O

- overview 8
  - of document 8
  - of EDI payments processing 31
  - of X12 10
- overview of X12 10–36

## P

- payment-related EDI transactions 33

## R

- response transactions 34

## S

- security in X12 30
- segment file names
  - Monk 43
- segment terminator 13
- segments 12
- setDefaultX12Delimiters 54
- setElementSeparator 57
- setRepetitionSeparator 59
- setSegmentTerminator 56
- setSubelementSeparator 58
- setXMLOutput 61
- ST02 (transaction set control number) 21
- structure of an X12 envelope 13
- structures 34, 35
- subelement (component) separator 13
- syntax
  - control numbers 20
  - delimiters 12

## T

- TA1 (interchange acknowledgment) 33
- template file names
  - Java 43
  - Monk 42
- template installation 38–39
- Template location 40

- template location
  - Monk 40
- testing ETDs 45–53
- tips, for implementation 64–66
- trading partner agreements 35
- transaction set 17
- transaction set control number (ST02) 21
- translations 34

## V

- validate (boolean parameter) 61
- validate (no parameters) 60
- validations 34

## W

- what is a message structure? 11

## X

- X12
  - acknowledgment types 33
  - additional information (Web sites) 36
  - data elements 12
  - end-to-end example 33
  - envelope structure 13
  - file names 42
  - functional group 18
  - interchange envelope 19
  - libraries 37
  - list of messages in version 4010 21
  - loops 12
  - security in 30
  - segments 12
  - transaction set 17
  - what is it? 10
- X12 acknowledgments, handling of 35
- X12 files and folders 39
- X12 files created by installation 41
- X12 folder structure created by installation 40
- X12 methods 54–63
- X12 overview 10–36
- X12 template installation 38–39