

SeeBeyond™ eBusiness Integration Suite

e*Way Intelligent Adapter for Sybase User's Guide

Release 4.5.2

Java Version



The information contained in this document is subject to change and is updated periodically to reflect changes to the applicable software. Although every effort has been made to ensure the accuracy of this document, SeeBeyond Technology Corporation (SeeBeyond) assumes no responsibility for any errors that may appear herein. The software described in this document is furnished under a License Agreement and may be used or copied only in accordance with the terms of such License Agreement. Printing, copying, or reproducing this document in any fashion is prohibited except in accordance with the License Agreement. The contents of this document are designated as being confidential and proprietary; are considered to be trade secrets of SeeBeyond; and may be used only in accordance with the License Agreement, as protected and enforceable by law. SeeBeyond assumes no responsibility for the use or reliability of its software on platforms that are not supported by SeeBeyond.

e*Gate, e*Insight, e*Way, e*Xchange, e*Xpressway, eBI, iBridge, Intelligent Bridge, IQ, SeeBeyond, and the SeeBeyond logo are trademarks and service marks of SeeBeyond Technology Corporation. All other brands or product names are trademarks of their respective companies.

© 1999–2002 by SeeBeyond Technology Corporation. All Rights Reserved. This work is protected as an unpublished work under the copyright laws.

This work is confidential and proprietary information of SeeBeyond and must be maintained in strict confidence.

Version 20020304162931.

Contents

Chapter 1

Introduction	8
Overview	8
Operational Overview	9
System Requirements	9
GUI Host Requirements	9
Participating Host Requirements	10

Chapter 2

Installation	11
Installing the Sybase e*Way on Windows NT/2000	11
Installing the Sybase e*Way on UNIX	12
Installing the Sybase Client	12
Files/Directories Created by the Installation	13

Chapter 3

e*Way Connection Configuration	14
Create e*Way Connections	14
class	15
ServerName	16
PortNumber	16
DatabaseName	16
user name	16
password	16
timeout	16
type	17
class	17
transaction mode	17
connection establishment mode	18
connection inactivity timeout	18
connection verification interval	18
Connection Manager	19
Controlling When a Connection is Made	19

Contents

Controlling When a Connection is Disconnected	20
Controlling the Connectivity Status	20

Chapter 4

Implementation	21
Implementing Java-enabled Components	21
The Java ETD Builder	22
Using ETDs with Tables, Views, Stored Procedures, and Prepared Statements	31
The select() Method	32
The insert() Method	32
The update() Method	33
The delete() Method	34
Collecting Data from Output Parameters	35
Returning Result Sets from Sybase, DB2, and SQL Server	36
Sample Scenario—Polling from a Sybase Database	40

Chapter 5

Sybase e*Way Methods	56
com.stc.eways.jdbcx.StatementAgent Class	56
resultSetToString	57
resultSetDirToString	57
resultSetConcurToString	58
isClosed	58
queryName	58
queryDescription	58
sessionOpen	59
sessionClosed	59
resetRequested	59
getResultSetType	59
getResultSetConcurrency	60
setEscapeProcessing	60
setCursorName	60
setQueryTimeout	61
setQueryTimeout	61
getFetchDirection	61
setFetchDirection	61
getFetchSize	62
getMaxRows	62
setMaxRows	62
getMaxFieldSize	63
setMaxFieldSize	63
getUpdateCount	63
getResultSet	63
getMoreResults	64
clearBatch	64
executeBatch	64
cancel	64
getWarnings	65
clearWarnings	65
stmtInvoke	65
com.stc.eways.jdbcx.PreparedStatementAgent Class	66

Contents

sessionOpen	66
setNull	67
setNull	67
setObject	67
setObject	68
setObject	68
setBoolean	68
setByte	69
setShort	69
setInt	70
setLong	70
setFloat	70
setDouble	71
setBigDecimal	71
setDate	71
setDate	72
setTime	72
setTime	72
setTimestamp	73
setTimestamp	73
setString	73
setBytes	74
setAsciiStream	74
setBinaryStream	74
setCharacterStream	75
setArray	75
setBlob	76
setClob	76
setRef	76
clearParameters	77
addBatch	77
execute	77
executeQuery	77
executeUpdate	77
com.stc.eways.jdbcx.PreparedStatementResultSet Class	78
Constructor PreparedStatementResultSet	80
getMetaData	80
getConcurrency	80
getFetchDirection	80
setFetchDirection	81
getFetchSize	81
setFetchSize	81
getCursorName	82
close	82
next	82
previous	82
absolute	82
relative	83
first	83
isFirst	83
last	83
isLast	84
beforeFirst	84
isBeforeFirst	84
afterLast	84
isAfterLast	85
getType	85
findColumn	85
getObject	85
getObject	86
getObject	86
getObject	87
getBoolean	87

Contents

getBoolean	87
getByte	88
getShort	88
getShort	88
getInt	89
getInt	89
getLong	89
getLong	90
getFloat	90
getFloat	91
getDouble	91
getBigDecimal	91
getBigDecimal	92
getDate	92
getDate	92
getTime	93
getTime	93
getTime	94
getTime	94
getTimestamp	95
getTimestamp	95
getTimestamp	95
getTimestamp	96
getString	96
getString	96
getBytes	97
getBytes	97
getAsciiStream	98
getAsciiStream	98
getBinaryStream	98
getBinaryStream	99
getCharacterStream	99
getArray	99
getBlob	100
getBlob	100
getClob	100
getClob	101
getRef	101
getRef	101
wasNull	102
getWarnings	102
clearWarnings	102
getRow	103
refreshRow	103
insertRow	103
updateRow	103
deleteRow	103
com.stc.eways.jdbcx.SqlStatementAgent Class	104
Constructor SqlStatementAgent	104
Constructor SqlStatementAgent	104
execute	105
executeQuery	105
executeUpdate	105
addBatch	106
com.stc.eways.jdbcx.CallableStatementAgent Class	106
Constructor CallableStatementAgent	107
Constructor CallableStatementAgent	107
Constructor CallableStatement Agent	108
sessionOpen	108
registerOutParameter	108
registerOutParameter	109
registerOutParameter	109

Contents

wasNull	110
getObject	110
getObject	110
getBoolean	111
getByte	111
getShort	111
getInt	112
getLong	112
getFloat	112
getDouble	113
getBigDecimal	113
getDate	113
getDate	114
getTime	114
getTime	114
getTimestamp	115
getTimestamp	115
getString	116
getBytes	116
getArray	116
getBlob	117
getClob	117
getRef	117
com.stc.eways.jdbcx.TableResultSet Class	118
select	119
next	119
previous	119
absolute	120
relative	120
first	120
isFirst	121
last	121
isLast	121
beforeFirst	121
isBeforeFirst	122
afterLast	122
isAfterLast	122
findColumn	122
getAsciiStream	123
getAsciiStream	123
getBinaryStream	123
getBinaryStream	123
getCharacterStream	123
getCharacterStream	124
refreshRow	124
insertRow	124
updateRow	124
deleteRow	124
moveToInsertRow	124
moveToCurrentRow	125
cancelRowUpdates	125
rowInserted	125
rowUpdated	125
rowDeleted	125
wasNull	126

Index

127

Introduction

This document describes how to install and configure the Java-enabled version of the e*Way Intelligent Adapter for Sybase.

This Chapter Includes:

- [“Overview” on page 8](#)
- [“Operational Overview” on page 9](#)
- [“System Requirements” on page 9](#)

1.1 Overview

The Sybase e*Way enables the e*Gate system to exchange data with external Sybase databases. This document describes how to install and configure the Java-enabled version of the Sybase e*Way.

The Sybase e*Way uses the Java library to issue SQL statements to interact with Sybase databases.

1.1.1 Intended Reader

The reader of this guide is presumed to be a developer or system administrator with responsibility for maintaining the e*Gate system; to have expert-level knowledge of Windows NT (or WIndows 2000) and UNIX operations and administration; to be thoroughly familiar with Sybase and SQL functions; and to be thoroughly familiar with Windows-style GUI operations.

1.1.2 Components

The following components comprise the Java-enabled version of the Sybase e*Way:

- **e*Way Connections:** The database e*Way Connections provide access to the information necessary for connecting to a specified external system.
- **stcjdbcx.jar:** Contains the logic required by the e*Way to interact with the external databases.

A complete list of installed files appears in [Table 1 on page 13](#).

1.2 Operational Overview

The Java-enabled version of the Sybase e*Way uses Java Collaborations to interact with one or more external databases. By using the Java Collaboration Service it is possible for e*Gate components—such as e*Way Intelligent Adapters (e*Ways) and Business Object Brokers (BOBs)—to connect to external databases and execute business rules written entirely in Java.

An e*Gate component is defined as *Java-enabled* based on the selection of the Java Collaboration Service in the Collaboration Rule setup. For more information on the Java Collaboration Service, see “[The Java Collaboration Service](#)” on page 22.

1.3 System Requirements

The Sybase e*Way is available on the following operating systems:

- Windows 2000, Windows 2000 SP1, and Windows 2000 SP2
- Windows NT 4.0 SP6a
- Solaris 2.6, 7, and 8
- AIX 4.3.3
- HP-UX 11.0 and HP-UX 11i
- Japanese Windows 2000, Windows 2000 SP1, and Windows 2000 SP2
- Japanese Windows NT 4.0 SP6a
- Japanese Solaris 2.6, 7, and 8
- Japanese HP-UX 11.0
- Compaq Tru64 V4.0F and V5.0A

To use the Sybase e*Way, you need the following:

- An e*Gate Participating Host, version 4.5.1 or later. For AIX operating systems, you need an e*Gate Participating Host, version 4.5.1. or later.
- A TCP/IP network connection.

The client components of the databases with which the e*Way interfaces have their own requirements; see that system’s documentation for more details.

GUI Host Requirements

To enable the GUI editors to communicate with the external system, the following items must be installed on any host machines running the GUI editors:

- The Sybase client library 11.1.1 or 12.
- The Sybase client library must be installed on Windows NT/2000 to utilize the build tool.

- Merant ODBC 4.0 driver available on the e*Gate installation cd.
- Microsoft Data Access Components (MDAC) RTM version 2.6 or greater. This component is included in the e*Gate GUI installation.

If the GUI host machine will also be executing the Sybase e*Way, the host machine must also meet the “[Participating Host Requirements](#)” on page 10.

Participating Host Requirements

The Sybase e*Way Installation program installs the Sybase jConnect 5.5 JDBC drivers required to connect to the external Sybase database. These drives will be appropriate for most Sybase implementations. Instructions on how to install, configure, and use Sybase’s jConnect JDBC drivers can be found at:

<http://www.sybase.com/detail?id=1009772#MARKER-2-144>

Note: You must run the Stored Procedure scripts provided by Sybase with the jConnect installation in order to fully utilize Stored Procedures. These scripts can be found and downloaded by visiting the above hyperlink.

However, for implementations using protocols other than Type 4, the appropriate client drivers must be installed.

A complete list of drivers from third party vendors can be found at:

<http://industry.java.sun.com/products/jdbc/drivers>

1.3.1 External System Requirements

The external system requirements are different for a GUI host machine—specifically a machine running the ETD Editor and the Java Collaboration Editor GUIs—versus a participating host which is used solely to run the e*Gate schema.

- Sybase Server 11.9 or 12.0.

Chapter 2

Installation

This chapter describes how to install the Sybase e*Way.

This Chapter Includes:

- “[Installing the Sybase e*Way on Windows NT/2000](#)” on page 11
- “[Installing the Sybase e*Way on UNIX](#)” on page 12
- “[Installing the Sybase Client](#)” on page 12
- “[Files/Directories Created by the Installation](#)” on page 13

2.1 [Installing the Sybase e*Way on Windows NT/2000](#)

2.1.1 [Pre-installation](#)

- 1 Exit all Windows programs before running the setup program, including any anti-virus applications.
- 2 You must have Administrator privileges to install this e*Way.

2.1.2 [Installation Procedure](#)

To install the Sybase e*Way on a Windows NT/2000 system:

- 1 Log in as an Administrator on the workstation on which you want to install the e*Way.
- 2 Insert the e*Gate installation CD-ROM into the CD-ROM drive.
- 3 If the CD-ROM drive’s “Autorun” feature is enabled, the setup application should launch automatically; skip ahead to step 4. Otherwise, use Windows Explorer or the Control Panel’s **Add/Remove Applications** feature to launch the file **setup.exe** on the CD-ROM drive.
- 4 The InstallShield setup application will launch. Follow the on-screen instructions to install the e*Way.

Note: Be sure to install the e*Way files in the suggested “client” installation directory. The installation utility detects and suggests the appropriate installation directory.

Unless you are directed to do so by STC support personnel, do not change the suggested “installation directory” setting.

2.2 Installing the Sybase e*Way on UNIX

2.2.1 Pre-installation

You do not require root privileges to install this e*Way. Log in under the user name that you wish to own the e*Way files. Be sure that this user has sufficient privilege to create files in the e*Gate directory tree.

2.2.2 Installation Procedure

To install the Sybase e*Way on a UNIX system:

- 1 Log in on the workstation containing the CD-ROM drive, and insert the CD-ROM into the drive.
- 2 If necessary, mount the CD-ROM drive.
- 3 At the shell prompt, type
`cd /cdrom`
- 4 Start the installation script by typing:
`setup.sh`
- 5 A menu of options will appear. Select the “install e*Way” option. Then, follow any additional on-screen directions.

Note: Be sure to install the e*Way files in the suggested “client” installation directory. The installation utility detects and suggests the appropriate installation directory.
Unless you are directed to do so by STC support personnel, do not change the suggested “installation directory” setting.

2.3 Installing the Sybase Client

The following instructions describe the procedure for installing the minimum components required by the Java-enabled version of the Sybase e*Way.

To install the Sybase client application:

- 1 Launch the Sybase Client installation program from the Sybase installation CD.

Note: The procedure for launching the installation program will vary depending upon your operating system.

- 2 When prompted to choose the type of installation, select **Standard Installation** and click **Next** to continue.
- 3 Specify the directory and click **Next** to continue.
- 4 View the list of components. Select **jConnect 4.2** and **jConnect 5.2** if they are not selected already and click **Next** to continue.

Follow the Wizard's instructions until you reach the client installation section.

- 5 When prompted for the client installation, select **Customized Install** and click **Next** to continue.
- 6 Specify the directory for the client installation and click **Next** to continue.
- 7 Clear the options for **Adaptive Server Enterprise** and **Full Text Search Base Product**; click **Next** to continue.

Note: Make sure the *jConnect* option is selected.

- 8 Follow the rest of the on-screen instructions using the default options.

2.4 Files/Directories Created by the Installation

The Sybase e*Way installation process will install the following files within the e*Gate directory tree. Files will be installed within the "egate\client" tree on the Participating Host and committed to the "default" schema on the Registry Host.

Table 1 Files created by the installation

e*Gate Directory	File(s)
client\classes\	stcjdbcx.jar
client\configs\sybase\	sybase.def
client\etd\	dbwizard.ctl
client\ThirdParty\sun\classes	jdbc2_0-stdext.jar
client\ThirdParty\sybase\classes\	jconn2.jar
server\registry\repository\default\	stcewjdbcx.ctl
server\registry\repository\default\classes	stcjdbcx.jar
server\registry\repository\configs\sybase	sybase.def
server\registry\repository\default\etd\	dbwizard.ctl
server\registry\repository\default\ThirdParty\sun\classes\	jdbc2_0-stdext.jar
ThirdParty\merant\classes	DGbase.jar
ThirdParty\merant\classes	DGsbase.jar
ThirdParty\merant\classes	DGutil.jar
ThirdParty\merant\classes	spy.jar

e*Way Connection Configuration

This chapter describes how to configure the Sybase e*Way Connections.

This Chapter Includes:

- “[Create e*Way Connections](#)” on page 14
- “[DataSource Settings](#)” on page 15
- “[Connector Settings](#)” on page 17


3.1 Create e*Way Connections

The e*Way Connections are created and configured in the Enterprise Manager.

To create and configure the e*Way Connections:


- 1 In the Enterprise Manager’s Component editor, select the e*Way Connections folder.

Figure 1 The e*Way Connections Folder

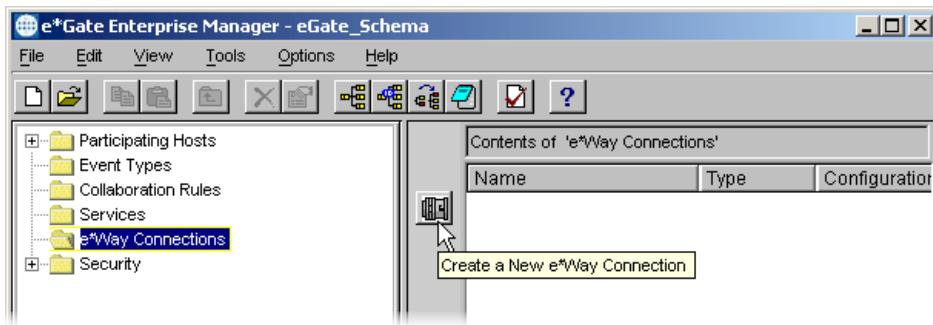

- 2 On the Palette, click the **New e*Way Connection** button .
- 3 The **New e*Way Connection Configuration** dialog box opens. Enter a name for the e*Way Connection and click **OK**.
- 4 Double-click the new e*Way Connection to open the e*Way Connection Properties dialog box. See.

Figure 2 e*Way Connection Properties Dialog Box

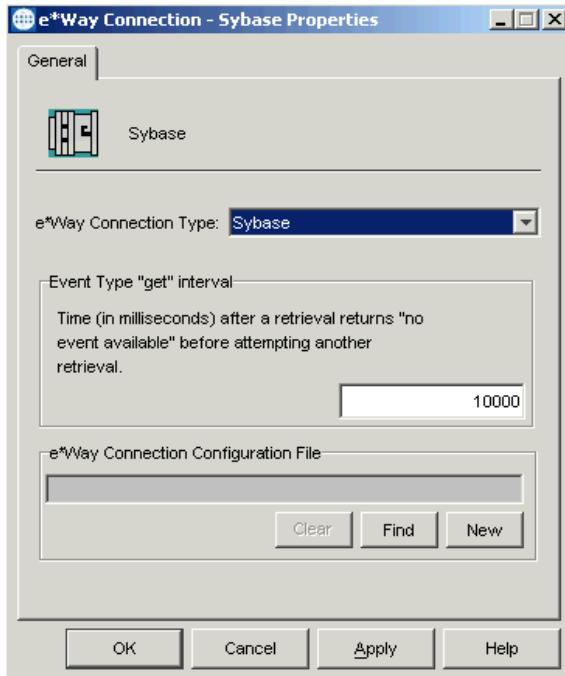

- 5 In the **e*Way Connection Type** list, click **Sybase**.
- 6 In the **Event Type "get" interval** box, enter an interval.
- 7 Click **New** to create a new e*Way Connection Configuration File.

The e*Way Connection Configuration File Editor will appear.

The e*Way Connection configuration file parameters are organized into the following sections:

- [DataSource Settings](#) on page 15
- [Connector Settings](#) on page 17

3.1.1 **DataSource Settings**

The DataSource settings define the parameters used to interact with the external database.

class

Description

Specifies the Java class in the JDBC driver that is used to implement the ConnectionPoolDataSource interface.

Required Values

A valid class name.

The default is **com.sybase.jdbc2.jdbc.SybConnectionPoolDataSource**.

ServerName

Description

Specifies the host name of the external database server.

Required Values

Any valid string.

PortNumber

Description

Specifies the port on which the server is listening for connection requests. Default is 5000

Required Values

A valid port number.

DatabaseName

Description

Specifies the name of the database instance.

Required Values

Any valid string.

user name

Description

Specifies the user name the e*Way will use to connect to the database.

Required Values

Any valid string.

password

Description

Specifies the password used to access the database.

Required Values

Any valid string.

timeout

Description

This is the login time out in seconds.

Required Values

The default value is 300 seconds.

3.1.2 Connector Settings

The Connector settings define the high level characteristics of the e*Way Connection.

type

Description

Specifies the type of e*Way Connection. The current available type for JDBC connections is **DB**.

Required Values

The default is DB.

class

Description

Specifies the class name of the JDBC connector object.

Required Values

The default is **com.stc.eways.jdbcx.DbConnector**.

transaction mode

This parameter specifies how a transaction should be handled.

- **Automatic** — e*Gate will take care of transaction control and users should not issue a commit or rollback. If you are using XA, you must set your **connection establishment mode** and your **transaction mode** both to **Automatic**.
- **Manual** — You will manually take care of transaction control by issuing a commit or rollback.

Required Values

The required values are **Automatic** or **Manual**. The default is set to **Automatic**.

Mixing XA-Compliant and XA-Noncompliant e*Way Connections

A Collaboration can be XA-enabled if and only if all its sources and destinations are XA-compliant e*Way Connections. However, XA-related advantages can accrue to a Collaboration that uses one (and only one) e*Way Connection that is transactional but not XA-compliant—in other words, it connects to exactly one external system that supports commit/rollback (and is thus transactional) but does not support two-phase commit (and is thus not XA-compliant). Please see the *e*Gate User's Guide* for usage and restrictions.

connection establishment mode

This parameter specifies how a connection with the database server is established and closed.

- **Automatic** indicates that the connection is automatically established when the collaboration is started and keeps the connection alive as needed. If you are using XA, you must set your **connection establishment mode** and your **transaction mode** both to **Automatic**.
- **OnDemand** indicates that the connection will be established on demand as business rules requiring a connection to the external system are performed. The connection will be closed after the methods are completed.
- **Manual** indicates that the user will explicitly call the connection connect and disconnect methods in their collaboration as business rules.

Required Values

The required values are **Automatic**, **OnDemand** or **Manual**. The default is set to **Automatic**.

Note: *If you are using Manual connection establishment mode, you must also use Manual transaction mode.*

connection inactivity timeout

This value is used to specify the timeout for the Automatic connection establishment mode. If this is set to 0, the connection will not be brought down due to inactivity. The connection is always kept alive; if it goes down, re-establishing the connection will automatically be attempted. If a non-zero value is specified, the connection manager will try to monitor for inactivity so that the connection is brought down if the timeout specified is reached.

Required Values

Any valid string.

connection verification interval

This value is used to specify the minimum period of time between checks for connection status to the database server. If the connection to the server is detected to be down during verification, your collaboration's `onDown` method is called. If the connection comes up from a previous connection error, your collaboration's `onUp` method is called.

Required Values

Any valid string.

3.2 Connection Manager

The Connection Manager allows you to define the connection functionality of your e*Way. You choose:

- When an e*Way connection is made.
- When to close the e*Way connection and disconnect.
- What the status of your e*Way connection is.
- When the connection fails, an OnConnectionDown method is called by the Collaboration

The Connection Manager was specifically designed to take full advantage of e*Gate 4.5.2's enhanced functionality. If you are running e*Gate 4.5.1 or earlier, this enhanced functionality is visible but will be ignored.

The Connection Manager is controlled in the e*Way configuration as described in **Connector Settings** on page 17. If you choose to manually control the e*Way connections, you may find the following chart helpful.

Figure 3 e*Way Connection Control methods

	Automatic	On-Demand	Manual
onConnectionUp	yes	no	no
onConnectionDown	yes	yes only if the connection attempt fails	no
Automatic Transaction (XA)	yes	no	no
Manual Transaction (XA)	yes	no	no
connect	no	no	yes
isConnect	no	no	yes
disconnect	no	no	yes
timeout or connect	yes	yes	no
verify connection interval	yes	no	no

Controlling When a Connection is Made

As a user, you can control when a connection is made. Using Connector Settings, you can choose to have e*Way connections controlled manually — through the Collaboration, or automatically — through the e*Way Connection Configuration. If you choose to control the connection you can specify the following:

- To connect when the Collaboration is loaded.
- To connect when the Collaboration is executed.
- To connect by using an additional connection method in the ETD.
- To connect by overriding any custom values you have assigned in the Collaboration.

- To connect by using the isConnected() method. The isConnected() method is called per connection if your ETD has multiple connections.

Controlling When a Connection is Disconnected

In addition to controlling when a connection is made, you can also manually or automatically control when an e*Way connection is terminated or disconnected. To control the disconnect you can specify:

- To disconnect at the end of a Collaboration.
- To disconnect at the end of the execution of the Collaborations Business Rules.
- To disconnect during a timeout.
- To disconnect after a method call.

Controlling the Connectivity Status

You can control how often the e*Way connection checks to verify if it is still alive and you can set how often it checks. See [Connector Settings](#) on page 17.

Implementation

This chapter discusses how to implement the Java-enabled Sybase e*Way in a production environment. Also included is a sample configuration. This chapter assumes that the Sybase e*Way has been successfully installed.


This Chapter Includes:

- [“Implementing Java-enabled Components” on page 21](#)
- [“The Java ETD Builder” on page 22](#)
- [“Sample Scenario—Polling from a Sybase Database” on page 40](#)

4.1 Implementing Java-enabled Components

An e*Way or a BOB can be Java-enabled by selecting the Java Collaboration Service in the Collaboration Rules Properties. Either of these components can use e*Way Connections to exchange data with external systems.

Figure 4 The Java Collaboration Service

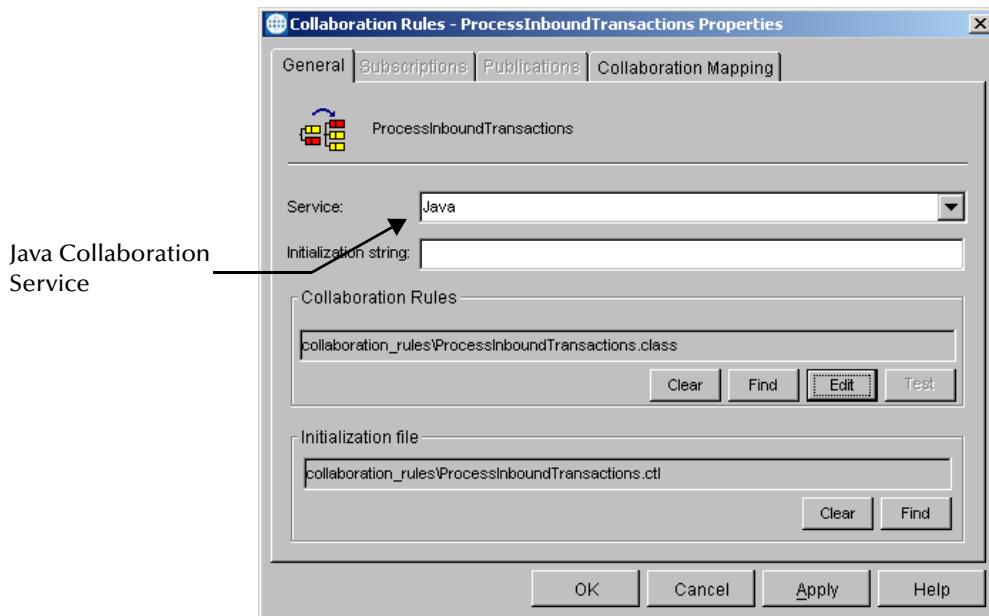

4.1.1 The Java Collaboration Service

The Java Collaboration Service makes it possible to develop external Collaboration Rules that will execute e*Gate business logic using Java code. Using the Java Collaboration Editor, you create Java classes that utilize the `executeBusinessRules()`, `userTerminate()`, and `userInitialize()` methods.

For more information on the Java Collaboration Service and sub collaborations, see the *e*Gate Integrator Collaboration Services Reference Guide*. For more information on the Java ETD Editor and the Java Collaboration Editor, see the *e*Gate Integrator User's Guide*.

4.1.2 Java-enabled Components

To make an e*Gate component Java-enabled, the component's Collaboration Rule must use the Java Collaboration Service. This requires all the intermediate components to also be configured correctly, since there is not a direct relationship between the e*Way/BOB and the Collaboration Service.

The e*Way/BOB requires one or more Collaborations. The Collaboration uses a Collaboration Rule. The Collaboration Rule uses a Collaboration Service. In order for the e*Way or BOB to be Java-enabled, the component's Collaboration Rule must use the Java Collaboration Service.

4.2 The Java ETD Builder

The Java ETD Builder is used to generate a Java-enabled ETD. The ETD Builder connects to the external database and generates the ETD corresponding to the external tables and procedures.

4.2.1 The Parts of the ETD

There are four possible parts to the Java-enabled Event Type Definition as shown in Figure 5 below.

Figure 5 The Java-enabled ETD



- **Element** – This is the highest level in the ETD tree. The element is the basic container that holds the other parts of the ETD. The element can contain fields and methods.
- **Field** – Fields are used to represent data. A field can contain data in any of the following formats: string, boolean, int, double, or float.

- **Method** – Method nodes represent actual Java methods.
- **Parameter** – Parameter nodes represent the Java method's parameters.

4.2.2 Using the DBWizard ETD Builder


The DBWizard ETD Builder generates Java-enabled ETDs by connecting to external data sources and creating corresponding Event Type Definitions. The ETD Builder can create ETDs based on any combination of tables, stored procedures, or prepared SQL statements.

Field nodes are added to the ETD based on the tables in the external data source. Java method and parameter nodes are added to provide the appropriate JDBC functionality. For more information on the Java methods, refer to your JDBC developer's reference.

To create a new ETD using the DBWizard

- 1 From the **Options** menu of the Enterprise Manager, choose **Default Editor....**
- 2 Verify that **Java** is selected, then click **OK**.
- 3 Click the **ETD Editor** button to launch the Java ETD Editor.
- 4 In the **Java ETD Editor**, click the **New** button to launch the New Event Type Definition Wizard.
- 5 In the **New Event Type Definition Wizard**, select the **DBWizard** and click **OK** to continue.

Figure 6 New Event Type Definition

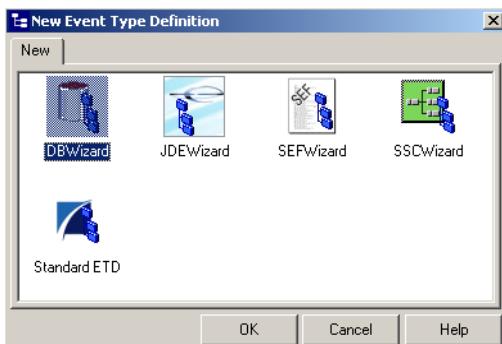


- 6 Enter the name of the new .xsc file you want to create or enter the name of the .xsc file you want to edit by browsing to its location.

Figure 7 Database Wizard - Introduction




- 7 Select your **Data Source**: from the drop down list and enter your **User Name**: and **Password**:

Figure 8 Database Wizard - DSN Selection

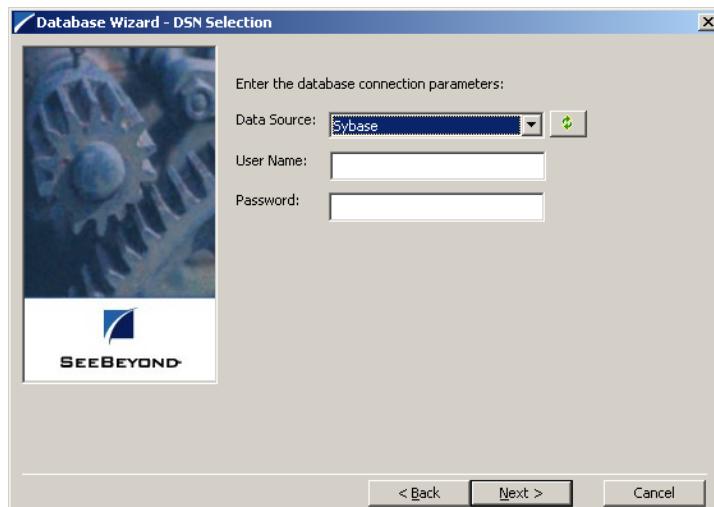

- 8 Select what type of database ETD you would like to generate. The data source you selected in the **Database Wizard - DSN Selection** window is the default. *Note: Do not change this unless instructed to do so by SeeBeyond personnel.*

Figure 9 Database Wizard - ETD Type Selection

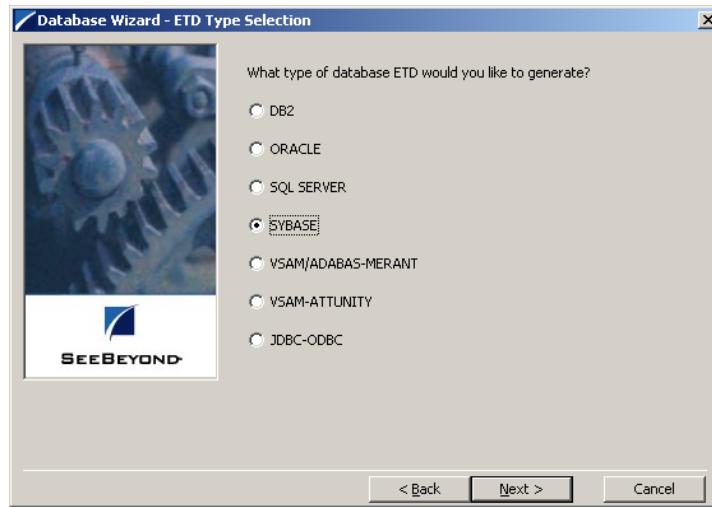


- 9 In the **Database Wizard - Object Selection** window, select any combination of **Tables**, **Views**, **Procedures**, or **Prepared Statements** you would like to include in your .xsc file. Click **Next** to continue.

Figure 10 Database Wizard - Object Selection




- 10 In the **Database Wizard - Tables** window, click **Add Tables**.

Figure 11 Database Wizard - Tables

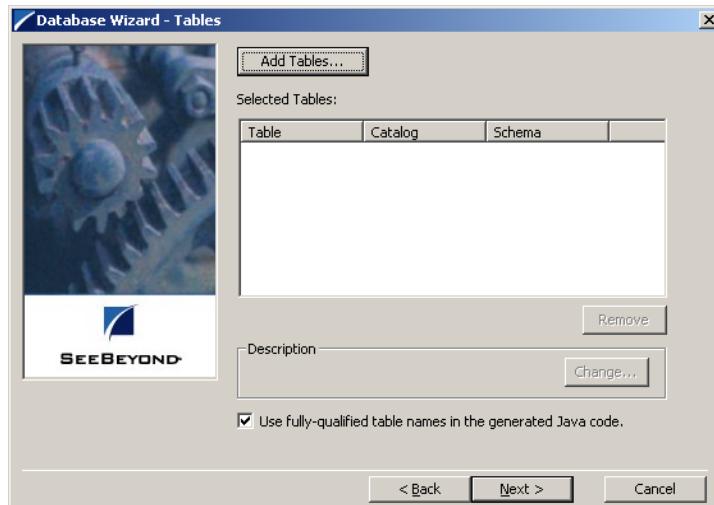

- 11 In the **Add Tables** window, type the exact name of the database table or use wildcard characters to return table names.

Figure 12 Add Tables

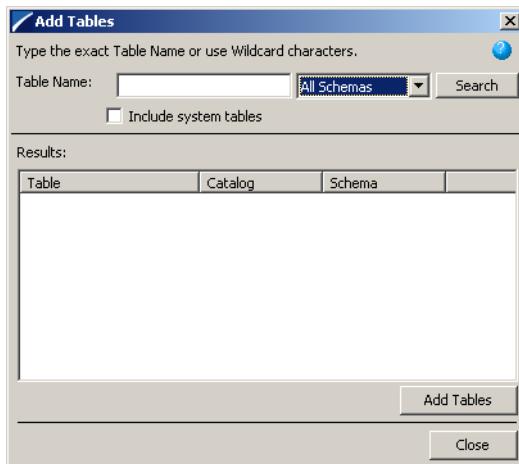

- 12 To see a list of valid wildcard characters, click the round ball with a question mark located in its center.

Figure 13 Wildcards


Operator	Description	Example
*	any number of characters	DB*
?	any single character	DB?

- 13 Select **Include System Tables** if you wish to include them and click **Search**. If your search was successful, you will see the results in the Results window. To select the name of the tables you wish to add to your .xsc, double click on the table name or

highlight the table names and click **Add Tables**. You may also use adjacent selections or nonadjacent selections to select multiple table names. When you have finished, click **Close**.


- 14 In the **Database Wizard - Tables** window, review the tables you have selected. If you would like to change any of the tables you have selected, click **Change**.
- 15 In the **Columns Selection** window, you can select or deselect your table choices. You can also change the data type for each table by highlighting the data type and selecting a different data type from the drop down list. Once you have completed your choices, click **OK**.

Figure 14 Columns Selection

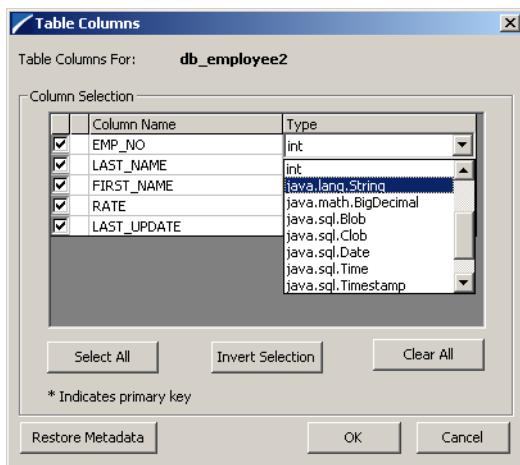


- 16 In the **Database Wizard - Tables** window, review the tables you have selected. If you do not want to use fully-qualified table names in the generated Java code, click to clear the check box and click **Next** to continue.
- 17 If you selected **Views** on the **Database Wizard - Object Selection** window, you are presented with the **Database Wizard - Views** window. Follow steps 9 - 15 to select and add views to your .xsc. Views are read-only.

Figure 15 Database Wizard - Views

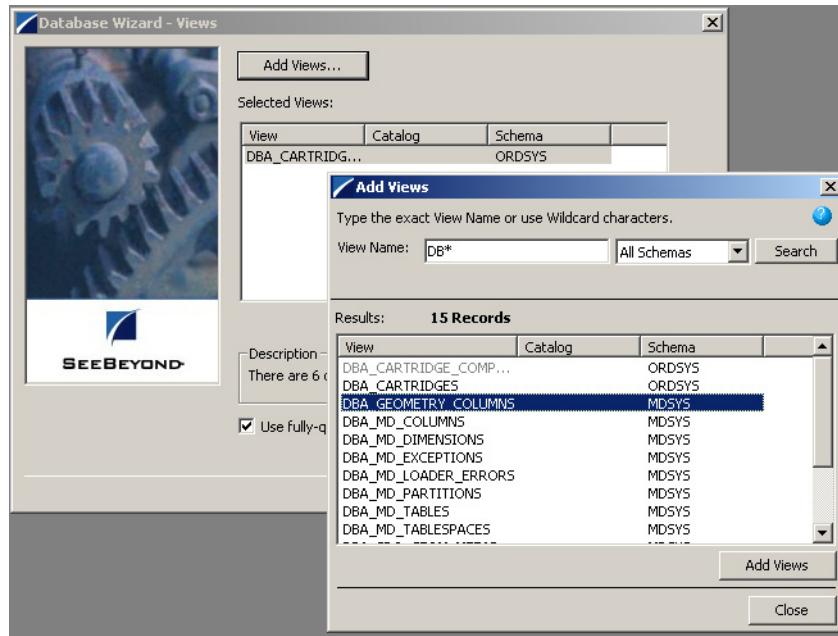


- If you selected **Procedures** on the Database Wizard - Object Selection window, you are presented with the Database Wizard - Procedures window. Follow steps 9 - 15 to select and add **Procedures** to your .xsc. If you do not want to use fully-qualified procedure names in the generated Java code, click to clear the check box and click **Next** to continue.

Figure 16 Database Wizard - Procedures

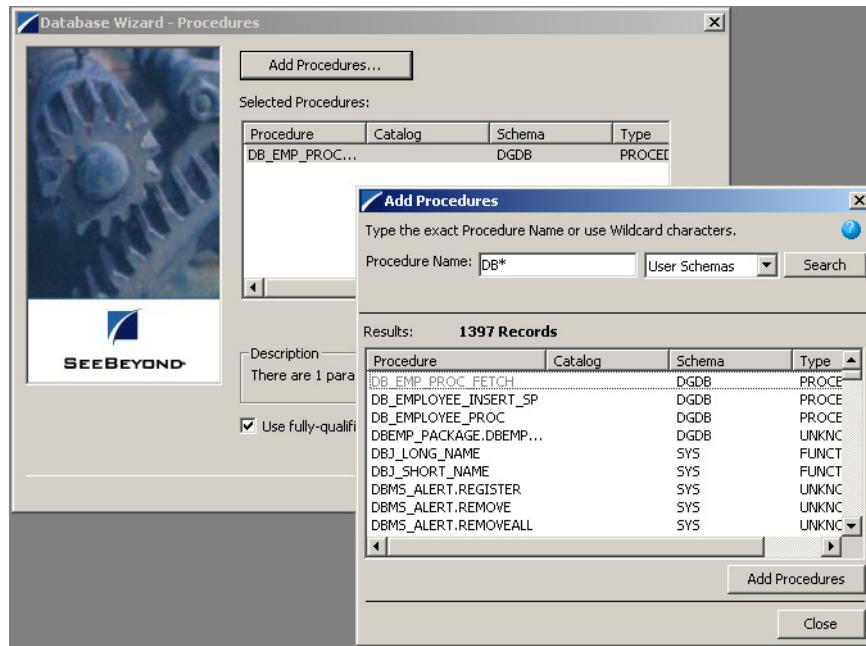

- 19 If you selected **Prepared Statements** on the **Database Wizard - Object Selection** window, you are presented with the **Database Wizard - Prepared Statement** window. To add **Prepared Statements** to your .xsc. complete the following steps:
- Click **Add** to add a new prepared statement
 - Enter a prepared SQL statement.
 - Enter the **Prepared Statement Name** to be used by the statement.
 - Use the **Open...** or **Save...** buttons to open pre-existing statements or save the current one.
 - Click **OK** to return to the **Database Wizard - Prepared Statements** screen.
- 20 Repeat steps A-E to add additional prepared statements or click **Next** to continue.

Figure 17 Database Wizard - Prepared Statements

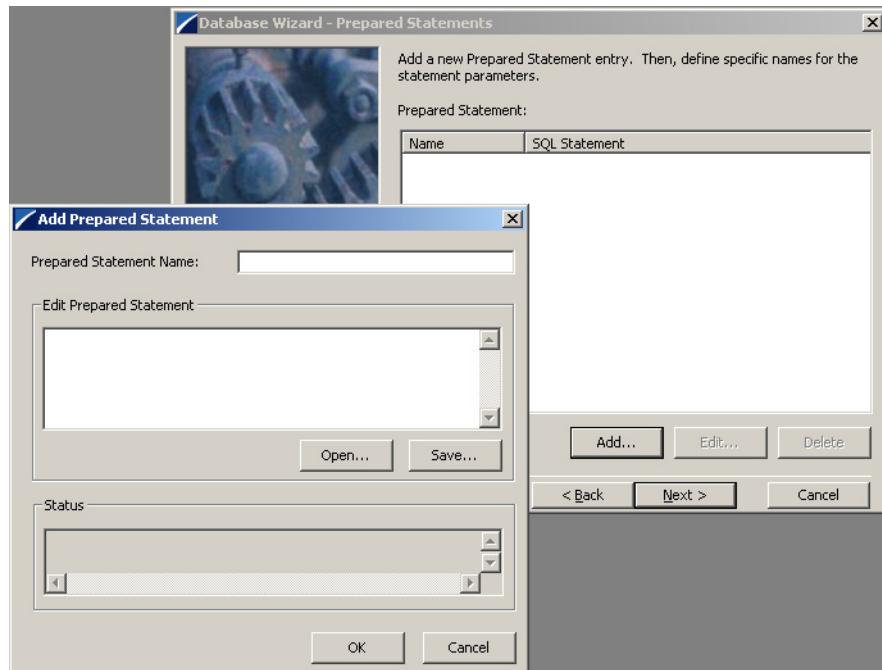


- 21 Enter the **Java Class Name** that will contain the selected tables and/or procedures and the **Package Name** of the generated classes.

Figure 18 Database Wizard - Class and Package



- 22 View the summary of the database wizard information and click **Finish** to begin generating the ETD.

Figure 19 Database Wizard - Summary

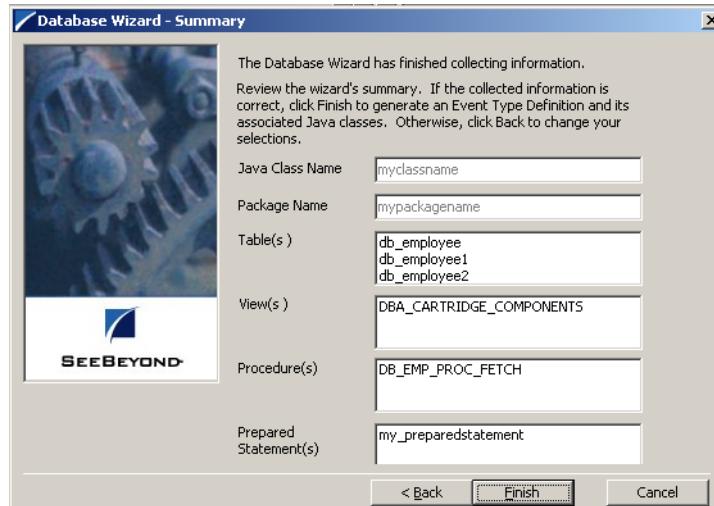

4.2.3 The Generated ETDs

The DataBase Wizard ETD builder can create three editable Event Type Definitions (ETDs) and one non-editable Event Type Definition (ETD). These types of ETDs can also be combined with each other. The four types of ETDs are:

- **The Table ETD** – The table ETD contains fields for each of the columns in the selected table as well as the methods required to exchange data with the external data source. To edit this type of ETD, you will need to open the .xsc in the DataBase Wizard.

- **The View ETD** - The view ETD contains selected columns from selected tables. View ETD's are read-only.
- **The Stored Procedure ETD** – The stored procedure ETD contains fields which correspond to the input and output fields in the procedure. To edit this type of ETD, you will need to open the .xsc in the DataBase Wizard
- **The Prepared Statement ETD** – The prepared statement ETD contains a result set for the prepared statement. To edit this type of ETD, you will need to open the .xsc in the DataBase Wizard.

4.2.4 Editing an Existing .XSC Using the Database Wizard

If you choose to edit an existing .xsc that you have created using the Database Wizard, do the following:

- 1 From the **Options** menu of the Enterprise Manager, choose **Default Editor...**
- 2 Verify that **Java** is selected, then click **OK**.
- 3 From the **Tools** menu, click **ETD Editor...**
- 4 From the ETD Tool menu click **File** and click **New**.
- 5 From the **New Event Type Definition** window, select **DBWizard** and click **OK**.
- 6 On the Database Wizard - Introduction window, select **Modify an existing XSC file:** and browse to the appropriate .xbs file that you would like to edit.

You are now able to edit your .xsc file.

Note: When you add a new element type to your existing .xsc, you must reselect any pre-existing elements or you will lose them when the new .xsc is created.

If you attempt to edit an .xsc whose elements no longer exist in the database, you will see a warning and the element will be dropped from the ETD.

4.3 Using ETDs with Tables, Views, Stored Procedures, and Prepared Statements

The Insert, Delete, Update, and Execute Methods are common methods used within the Collaboration Editor.

4.3.1 Tables

A table ETD represents a database table. It consists of fields and methods. Fields correspond to the columns of a table while methods are the operations that you can apply to the ETD. This allows you to perform SELECT, UPDATE, INSERT and DELETE SQL operations in a table.

The select() Method

To perform a select operation on a table, add a new method in the Collaboration Editor by clicking on the **method** button. In the Method Properties box, define the method. Add a rule to the method by clicking on the **rule{}** button. The Rule Properties dialog box appears. Select the node and drag and drop it into the dialog box. This method takes an empty string or a WHERE clause. For example:

```
getDBEmp().getDB_EMPLOYEE().select("EMP_NO = 123");
```



The insert() Method

To perform a insert operation on a table, do the following:

- 1 From the Collaboration Editor, click the **method** button. Execute the select method with the right concurrency for example CONCUR_UPDATABLE and scroll sensitivity for example TYPE_FORWARD_ONLY.
- 2 Move to the insert row by the moveToInsertRow method.
- 3 Set the fields of the table ETD
- 4 Insert the row by calling insertRow

This example inserts an employee record.

```
getDBEmp().getDB_EMPLOYEE(ResultSet.TYPE_FORWARD_ONLY,  
ResultSet.CONCUR_UPDATABLE).select("");  
getDBEmp().getDB_EMPLOYEE().moveToInsertRow();  
getDBEmp().getDB_EMPLOYEE().setEMP_NO(123);  
.  
.  
.  
getDBEmp().getDB_EMPLOYEE().setRATE(123.45);  
getDBEmp().getDB_EMPLOYEE().insertRow();
```

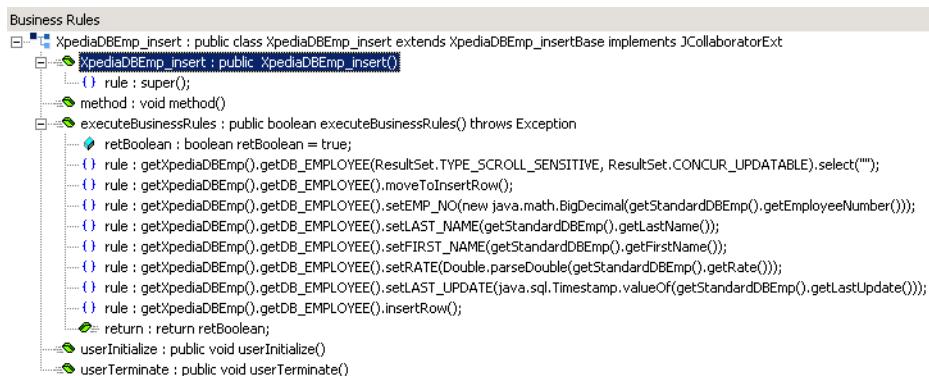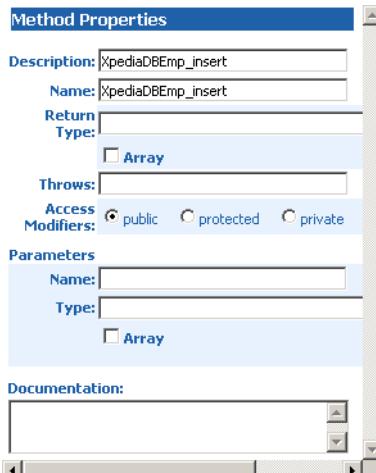Figure 20 Insert Method Business Rule**Figure 21** Insert Method Properties

The update() Method

To perform an update operation on a table, do the following:


- 1 Execute the **select** method with the right concurrency for example CONCUR_UPDATEABLE and scroll sensitivity for example TYPE_FORWARD_ONLY,
- 2 Move to the row that you want to update.
- 3 Set the fields of the table ETD
- 4 Insert the row by calling **insertRow**.

In this example, we move to the third record and update the EMP_NO and RATE fields.

```
getDBEmp().getDB_EMPLOYEE(ResultSet.TYPE_FORWARD_ONLY,  
ResultSet.CONCUR_UPDATABLE).select("");
```

```
getDBEmp().getDB_EMPLOYEE().absolute(3);
getDBEmp().getDB_EMPLOYEE().setEMP_NO(123);
getDBEmp().getDB_EMPLOYEE().setRATE(123.45);
getDBEmp().getDB_EMPLOYEE().updateRow();
```

Figure 22 Update() Method Business Rule

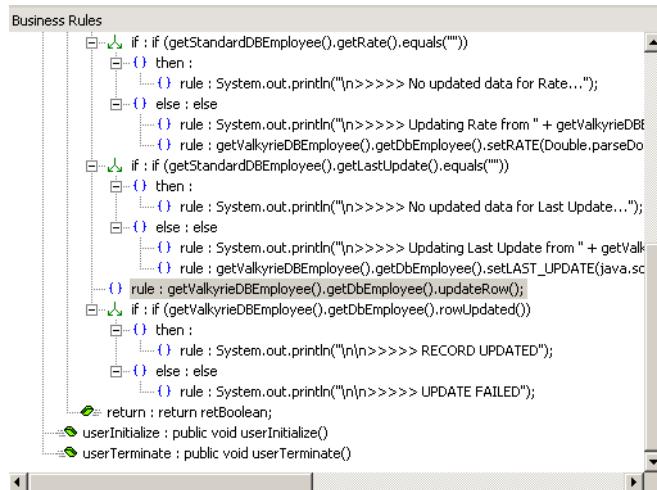

The delete() Method

To perform a delete operation on a table do the following:

- 1 Execute the **select** method with the right concurrency for example CONCUR_UPDATEABLE and scroll sensitivity for example TYPE_FORWARD_ONLY, TYPE_FORWARD_ONLY.
- 2 Move to the row that you want to delete.
- 3 Set the fields of the table ETD
- 4 Insert the row by calling **insertRow**.

In this example DELETE the first record of the result set.

```
getDBEmp().getDB_EMPLOYEE(ResultSet.TYPE_FORWARD_ONLY,
ResultSet.CONCUR_UPDATABLE).select(" ");
getDBEmp().getDB_EMPLOYEE().first();
getDBEmp().getDB_EMPLOYEE().deleteRow();
```

4.3.2 The View

Views are used to look at data from selected columns within selected tables. Views are read-only.

4.3.3 The Stored Procedure

A Stored Procedure ETD represents a database stored procedure. Fields correspond to the arguments of a stored procedure while methods are the operations that you can apply to the ETD. It allows you to execute a stored procedure. Remember that while in

the Collaboration Editor you can drag and drop nodes from the ETD's into the Collaboration Editor.

Note: Prior to using Stored Procedures, it is recommended that you run **sp_procoemode<procedure name>, anymode** from the ISQL command line. Not running this will produce unexpected behavior in your Collaboration. If you are not the owner of the server, you may need to use **sp_procoemode dbo.<procedure name>, anymode**.

Collecting Data from Output Parameters


You can collect data within a Stored Procedure Result Set by using output parameters.

An example of how to execute a stored procedure using output parameters is:

```
create procedure LookupGlobal
( @inlocalID varchar, @outglobalProductID varchar output )
as
begin
select @outglobalProductID = globalProductID from SimpleLookup where
localID = @inlocalID
end
go
```

In the following image, the ETD represents the Stored Procedure "LookUpGlobal" with two parameters, an inbound parameter (INLOCALID) and an outbound parameter (OUTGLOBALPRODUCTID). Representing these as nodes in an ETD allows you to drag values from other ETD's to the input parameters, execute the call, and collect the output parameter data by dragging from its node to elsewhere.

Figure 23 Stored Procedure LookUpGlobal

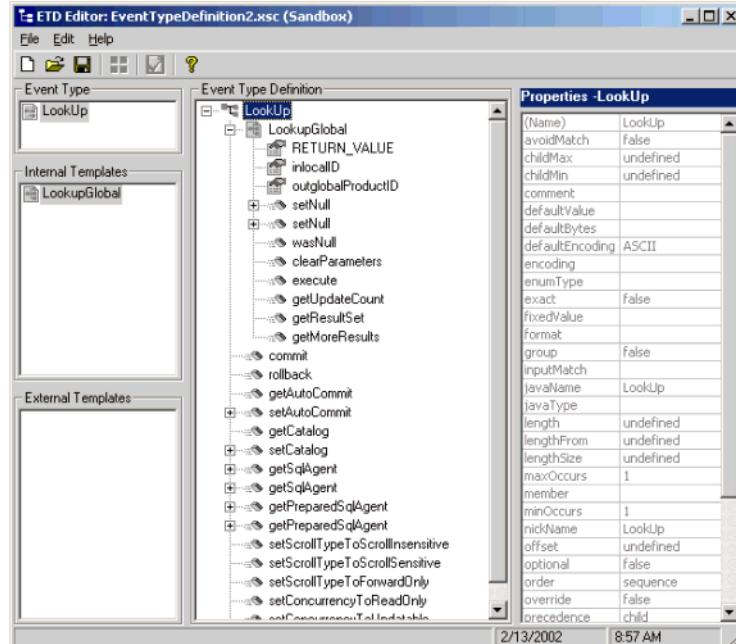

Returning Result Sets from Sybase, DB2, and SQL Server

The following Result Set processing returns rows into the body of the Stored Procedure. Databases that allow this operation are Sybase, DB2, and SQL Server.

A stored procedure in a database can perform update and select operations. The application checks what operation has been performed. For additional information on Sybase Result Sets, please refer to your Sybase jConnect documentation.

The following methods allow you to collect this information:

getUpdateCount:

This method should be called only after a call to **executeRetVal** or **getMoreResults**, and should be called only once per result. An int greater than 0 represents the number of rows affected by an operation. A value of 0 means no rows were affected or the operation is a DDL command. -1 means the result is a result set or there are no more results.

getResultSet:

When the **executeRetVal** method has been used to execute the stored procedure. This method returns the current result set if there is one. Otherwise, it returns a null value which indicates the result is an update count or there are no more results.

getMoreResults:

Moves to the next result. This method returns true if it gets the next result set. It returns false if it is an update count or there are no more results.

This example prints out the update count and result sets that are returned from the stored procedures.

```
int iRow;
com.stc.eways.jdbcx.ResultSetAgent rs;
getpoller().getMrsSp().executeRetVal();

do
{
    iRow = getpoller().getMrsSp().getUpdateCount();
    System.out.println("\n*****iRow = " +
Integer.toString(iRow));

    if (iRow >= 0)
    {
        getblobout().setField1("Number of rows affected: " +
Integer.toString(iRow));
        getblobout().send();
    }
    else
    {
        rs = getpoller().getMrsSp().getResultSet();
        while (rs.next())
        {
            getblobout().setField1("Col5 = " +
Integer.toString(rs.getInt(1)) + ", Col6 = " +
Integer.toString(rs.getInt(2)));
            getblobout().send();
        }
    }
}
while (getpoller().getMrsSp().getMoreResults());
```

Use an outbound parameter to enrich another ETD.


Note: When you set `ResultSet.TYPE_FORWARD_ONLY` and `ResultSet.CONCUR_UPDATABLE`, the table should have a unique index. If your table does not, you will see the following exception `com.sysbase.jdbc2.jdbc.sybSQLException: The optimizer could not find a unique index which it could use to scan table "name of table" for cursor "jconnect_implicit_1."`

4.3.4 Prepared Statement

To Create a prepared statement from the DataBase Wizard:


- 1 Select the **Prepared Statement** option in the DataBase Wizard and complete the following steps:
 - A Click **Add** to add a new prepared statement
 - B Enter a prepared SQL statement as shown. The question marks serve as place holders that are later defined as the parameters in [Figure 25 on page 38](#)

Figure 24 Add Prepared Statement

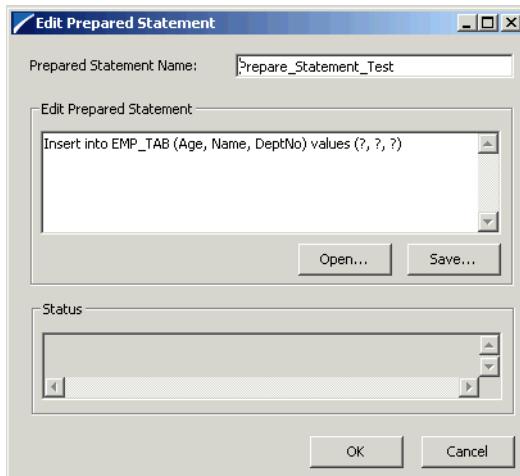

- C Enter the **Prepared Statement Name** to be used by the statement.
- D Use the **Open...** or **Save...** buttons to open pre-existing statements or create and save the current one.
- 2 [Figure 25 on page 38](#) shows the statement along with a table of the parameters. You can give each parameter an appropriate name and data type. These parameters become nodes in the prepared statement ETD and fields within the generated Java object.

Figure 25 Prepared Statement Summary and Parameter Modification

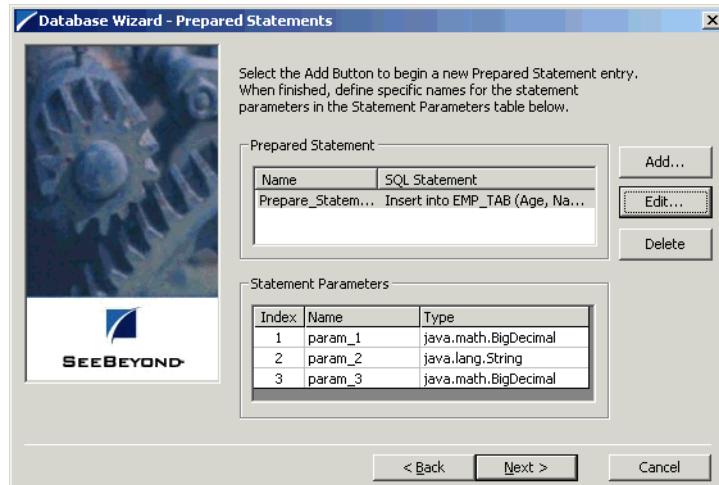

- From the ETD Editor, save the Prepared Statement you just created.

Figure 26 TableJavaClass



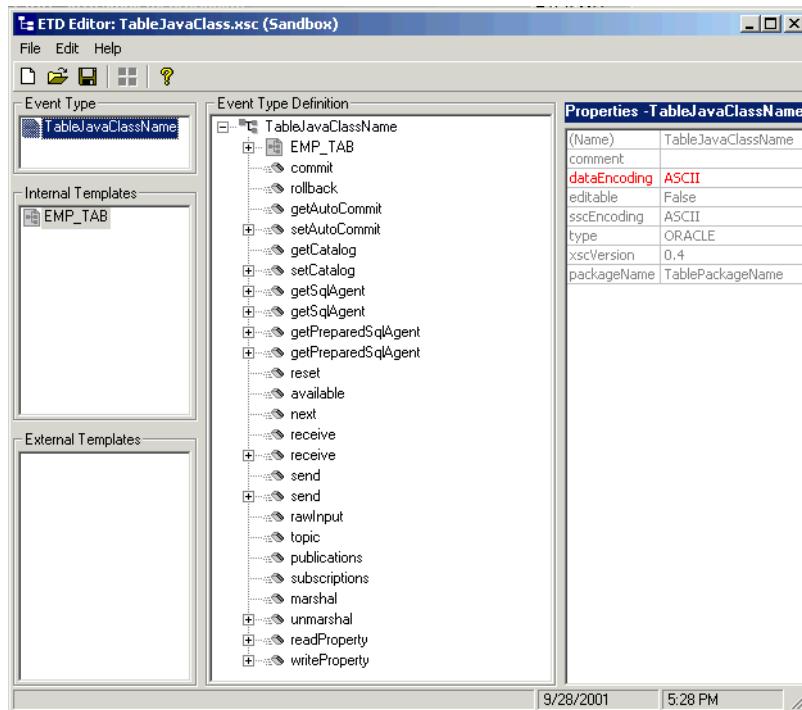


Figure 27 Collaboration Rule Editor

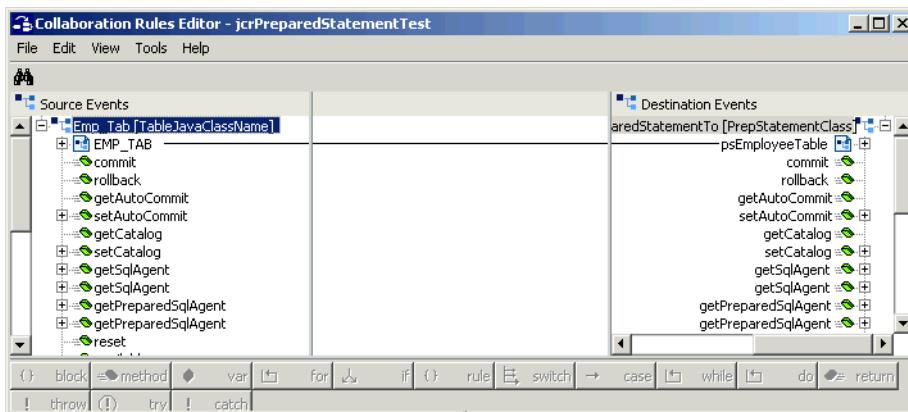

- 4 Map the fields you would like to populate the table with from the Source Events to the Destination Events.
- 5 Create your rules by dragging and dropping each node into the Rules window. This particular example shows the Age, Name and Department Number of three employees.

Figure 28 Collaboration Business Rules

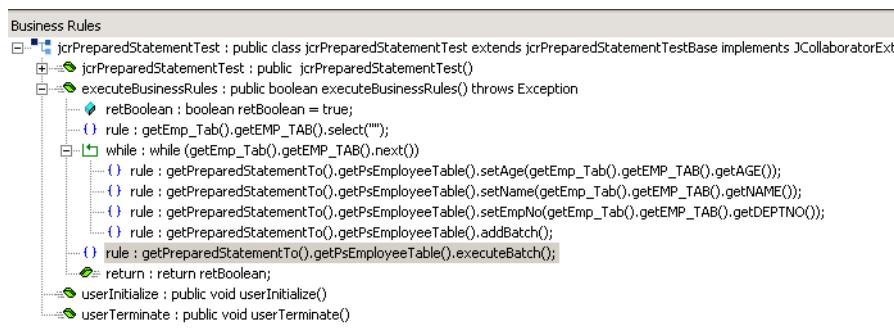

- 6 Run the schema and verify the new content in Employee database.

4.3.5 Batch Operations

While the Java API used by SeeBeyond does not support traditional bulk insert or update operations, there is an equivalent feature that can achieve comparable results, with better performance. This is the “Add Batch” capability. The only modification required is to include the **addBatch()** method for each SQL operation and then the **executeBatch()** call to submit the batch to the database server.

```

getDBEmp().getDB_EMPLOYEE().select(" ");
while (getDBEmp().getDB_EMPLOYEE().next ())
{
}

getPSDBEmp().getDbEmployeeUpdate().setEmployeeNo(getDBEmp().getDB_EMPLOYEE().getEMP_NO ());
    getPSDBEmp().getDbEmployeeUpdate().setNewTime(ts);
    getPSDBEmp().getDbEmployeeUpdate().addBatch ();
}

```

```
getPSDBEmp().getDbEmployeeUpdate().executeBatch();
```

4.3.6 Database Configuration Node

The Database Configuration node allows you to manage the “transaction mode” through the Collaboration if you have set the mode to manual in the e*Way connection configuration. See [“Connector Settings” on page 17](#).


For additional information on Sybase Result Sets, please refer to your Sybase jConnect documentation.

4.4 Sample Scenario—Polling from a Sybase Database

This section describes how to use the Java-enabled Sybase e*Way in a sample implementation. This sample schema demonstrates the polling of records from a Sybase database and converting the records into e*Gate Events.

Figure 29 shows a graphical overview of the sample schema.

Figure 29 The Database Select Scenario—Overview

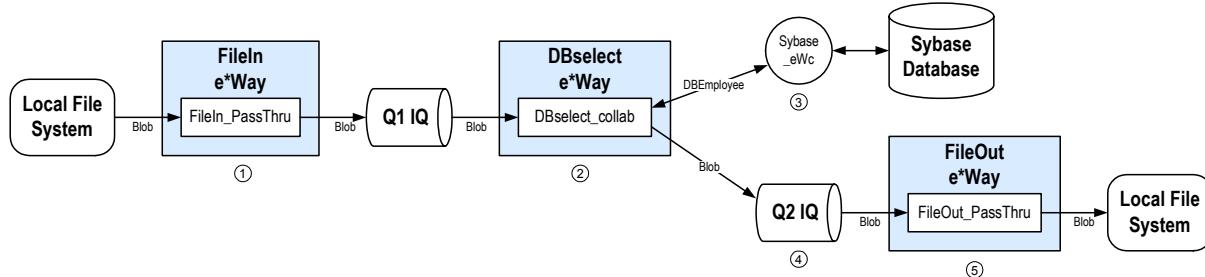

- 1 The **FileIn e*Way** retrieves an Event (a text file) containing the database select criteria and publishes it to the **Q1 IQ**.
- 2 The **DBselect e*Way** retrieves the Generic Event (**Blob**) from the IQ. This triggers the rest of the Collaboration which has two parts.
- 3 The information in **Blob** is used to retrieve information from the database via the **Sybase_eWc e*Way Connection**. This e*Way Connection contains information used by the Collaboration to connect to the Sybase database.
- 4 The information retrieved from the database is copied to the Generic Event (**Blob**) and published to the **Q2 IQ**.
- 5 The **FileOut e*Way** retrieves the Generic Event (**Blob**) from the **Q2 IQ** then writes it out to a text file on the local file system.


Overview of Steps

The sample implementation follows these general steps:

- [“Create the Schema” on page 42](#)
- [“Add the Event Types and Event Type Definitions” on page 42](#)

- “Create the Collaboration Rules and the Java Collaboration” on page 45
- “Add and Configure the e*Ways” on page 49
- “Add and Configure the e*Way Connections” on page 51
- “Add the IQs” on page 52
- “Add and Configure the Collaborations” on page 53
- “Run the Schema” on page 54

Figure 30 Schema Configuration Steps

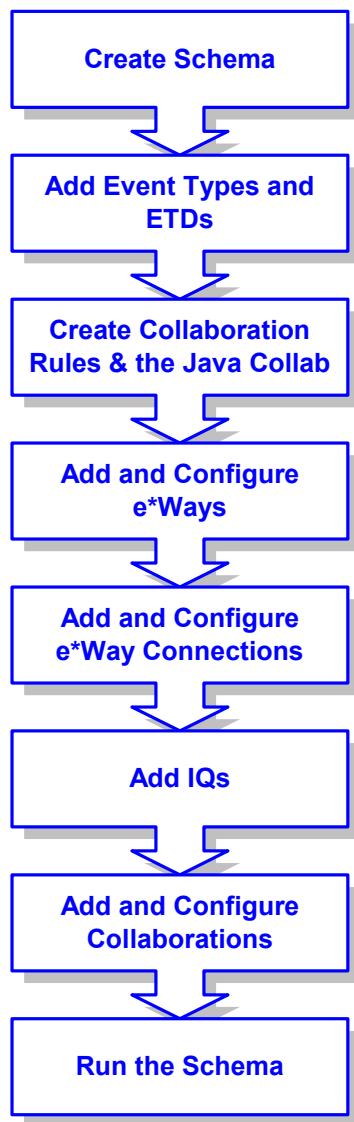

External Database Tables

The sample uses a simple external Sybase database with a table called **DB_EMPLOYEE**. The table contains the following columns:

Table 2 The DB_EMPLOYEE Table

Column	Format	Description
EMP_NO	INTEGER	The employee number.
LAST_NAME	VARCHAR2	The employee's last name.
FIRST_NAME	VARCHAR2	The employee's first name.
RATE	FLOAT	The employee's pay rate.
LAST_DATE	DATETIME	The last transaction date for the employee

4.4.1 Create the Schema

The first step in the sample implementation is creating a new schema. After installing the Sybase e*Way Intelligent Adapter, do the following:

- 1 Launch the e*Gate Enterprise Manager GUI.
- 2 Log into the appropriate Registry Host.
- 3 From the list of schemas, click **New** to create a new schema.
- 4 For this sample implementation, enter the name **DBSelect** and click **Open**.

The Enterprise Manager will launch and display the newly created schema.

4.4.2 Add the Event Types and Event Type Definitions

Two Event Types and Event Type Definitions are used in this sample.

- **DBEmployee** – This Event Type represents the layout of the employee records in the **DB_Employee** table. The Event Type uses the **DBEmployee.xsc** Event Type Definition. The ETD will be generated by using the Java ETD Editor's Database Wizard (DBWizard).
- **GenericBlob** – This Event Type is used to pass records with no specific format (blob). The Event Type uses the **GenericBlob.xsc** ETD. The ETD will be manually created as a fixed-length ETD.

- 1 From the **Options** menu of the Enterprise Manager, choose **Default Editor...**
- 2 Verify that **Java** is selected, then click **OK**.
- 3 In the **Components** pane of the Enterprise Manager, select the **Event Types** folder.
- 4 Click the **New Event Type** button to add a new Event Type.
- 5 Enter the name **DBEmployee** and click **OK**.
- 6 Double-click the new **DBEmployee** Event Type to display its properties.
- 7 Click the **New** button to create a new Event Type Definition (ETD). The Java Event Type Definition Editor will appear.
- 8 From the **File** menu, choose **New**. The New Event Type Definition dialog box will appear.
- 9 In the New Event Type Definition dialog box, select **DBWizard** and click **OK**.

- 10 Select Create a new .XSC file. Click **Next** to continue. See Figure 31.


Figure 31 Database Wizard Introduction



- 11 Enter the database DNS source and login information.
A Select the **Data Source** from the dropdown list of ODBC data sources.
B Enter the **User Name** and **Password** used to log into the database.

Click **Next** to continue.

Figure 32 Database Wizard - DSN Selection

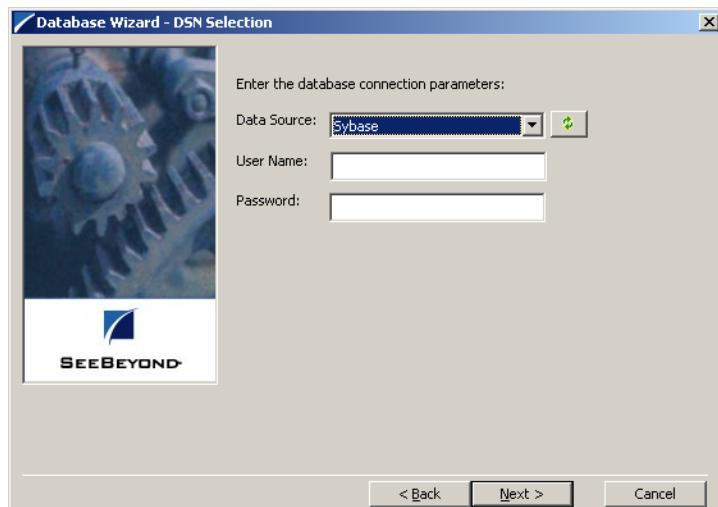

- 12 The **Database Wizard - ETD Type Selection** window appears. The DNS source you selected on the previous window is the default selection for this window. Do not change this selection type unless instructed to do so by SeeBeyond support personal. Click **Next** to continue.
- 13 This scenario uses a table rather than a procedure. Select **Table** and click **Next** to continue.

- 14 From the **Database Wizard - Tables** window, click **Add Tables...** Enter the exact **Table Name** or enter any valid wildcards. From the drop down list select the appropriate database schema and click **Search**. The wizard connects to the data source and display a list of tables.
- 15 Select the table to be included in the ETD and click **Next**.
- 16 The Java Class Name/ Package Name dialog box will appear. Enter the Group and Package information.
 - A Enter your database name as the **Java Class Name**.
 - B Enter **DBEmployee** for the Package Name and click **Next** to continue.
- 17 Click **Finish** to complete the Wizard. The Wizard will generate and display the ETD.
- 18 From the **File** menu, choose **Save**.
- 19 Name the ETD **DBEmployee.xsc** and click **OK**.
- 20 From the **File** menu, choose **Promote to Run Time** and click **OK** when finished.
- 21 From the **File** menu, choose **Close** to exit the ETD Editor.

To create the GenericBlob Event Type and ETD:

- 1 In the **Components** pane of the Enterprise Manager, select the **Event Types** folder.
- 2 Click the **New Event Type** button to add a new Event Type.
- 3 Enter the name **GenericBlob** and click **OK**.
- 4 Double-click the new **GenericBlob** Event Type to display its properties.
- 5 Click the **New** button to create a new Event Type Definition. The Java Event Type Definition Editor appears.
- 6 From the **File** menu, choose **New**.
The New Event Type Definition dialog box appears.
- 7 In the New Event Type Definition dialog box, select **Standard ETD** and click **OK**.
- 8 Read the Introduction screen, then click **Next** to continue. The Package Name dialog box appears.
- 9 Enter **GenericBlobPackage** for the **Package Name** and click **Next** to continue.
- 10 Read the summary information and click **Finish** to generate the ETD.
- 11 In the **Event Type Definition** pane, right-click the root node, point to **Add Field** in the shortcut menu, and click **As Child Node**.
- 12 Enter the properties for the two nodes as shown in Table 3.

Table 3 GenericBlob ETD Properties

Node	Property	Value
Root Node	Name	GenericBlob
	Structure	fixed
	Length	0

Node	Property	Value
Child Node	Name	Data
	Structure	fixed
	Length	0

- 13 From the **File** menu, choose **Save**.
- 14 Enter the name **GenericBlob.xsc** and click **OK**.
- 15 From the **File** menu, choose **Promote to Run Time** and click **OK** when finished.
- 16 From the **File** menu, choose **Close** to exit the ETD Editor.
- 17 In the Event Type properties dialog box, click **OK** to save and close the Event Type.

4.4.3 Create the Collaboration Rules and the Java Collaboration

The sample scenario uses two Collaboration Rules and one Java Collaboration:

- **GenericPassThru** – This Collaboration Rule is used to pass the GenericBlob Event Type through the schema without modifying the Event.
- **DBSelect** – This Collaboration Rule is used to convert the inbound Event's selection criteria into a SQL statement, poll the external database, and return the matching records as an outbound Event.
- **DBSelectCollab** – This Java Collaboration contains the logic required to communicate with the external database.

To create the **GenericPassThru** Event Type:


- 1 In the components pane of the Enterprise Manager, select the **Collaboration Rules** folder.
- 2 Click the **New Collaboration Rules** button to add a new Collaboration Rule.
- 3 Name the Collaboration Rule **GenericPassThru** and click **OK**.
- 4 Click the **Properties** button to display the Collaboration Rule's properties.
- 5 Click the **Subscriptions** tab, select the **GenericBlob** Event Type, and click the right arrow.
- 6 Click the **Publications** tab, select the **GenericBlob** Event Type, and click the right arrow.
- 7 Click **OK** to save the Collaboration Rule.

To create the **DBSelect** Event Type:

- 1 In the components pane of the Enterprise Manager, select the **Collaboration Rules** folder.
- 2 Click the **New Collaboration Rules** button to add a new Collaboration Rule.
- 3 Name the Collaboration Rule **DBSelect** and click **OK**.
- 4 Click the **Properties** button to display the Collaboration Rule's properties.

- 5 In the Service list, click Java.
- 6 Click the Collaboration Mapping tab.
- 7 Add three instances as shown in Figure 33 below:

Figure 33 DBSelect Instances

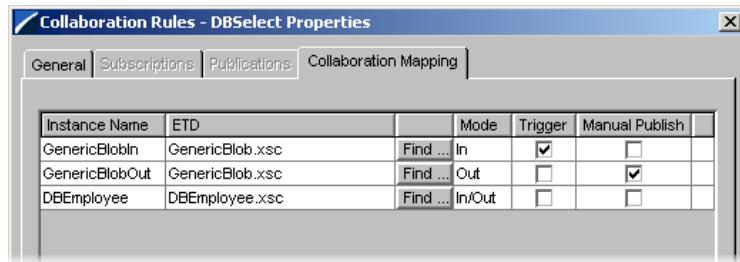


- 8 Click Apply to save the current changes.
- 9 Click the General tab.
- 10 Click New to create the new Collaboration file

The Java Collaboration Editor appears. Note that Source and Destination Events are already supplied based on the Collaboration Rule's Collaboration Mapping (see Figure 34).
- 11 From the View menu, choose Display Code.


This displays the Java code associated with each of the Collaboration's rules.
- 12 From the Tools menu, choose Options, and then click Add File.... Add .\eGate\client\classes\stcjdbcx.jar and .\eGate\client\ThirdParty\sybase\classes\jconn2.jar and click OK to close each of the dialog boxes.
- 13 In the Business Rules pane, select the retBoolean rule and click the rule button to add a new rule.
- 14 In the Destination Events pane, expand the DBEmployee Event Type until the select method is visible.
- 15 Drag the select method into the Rule field of the Rule Properties pane. Click OK to close the dialog box without entering any criteria. (See Figure 34).

Figure 34 Rule Properties

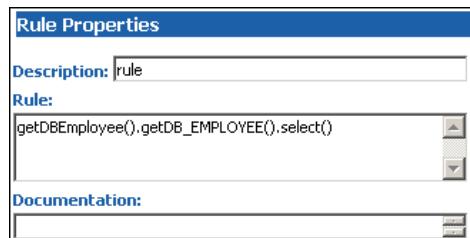


- 16 In the **Source Events** pane, expand the **GenericBlobIn** Event Type until the **Data** node is visible.
- 17 In the Rule Properties pane, position the cursor inside the parentheses of the select method. Then drag the Data node from the Source Events pane into the select method's parentheses. (See Figure 35).

Figure 35 Rule Properties (Continued)

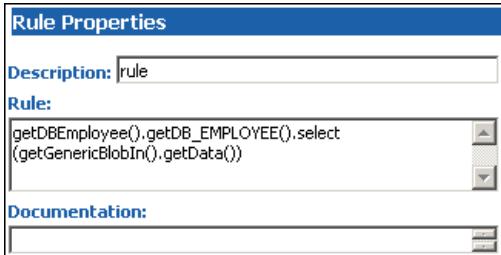


- 18 Select the newly edited rule in the **Business Rules** pane and click the **while** button to add a new while loop beneath the current rule.
- 19 Drag the next method from the Destination Events pane into the Condition field of the While Properties pane. (See Figure 36).

Figure 36 While Properties

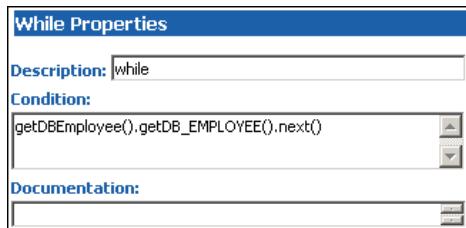


- 20 Select the newly edited while loop in the Business Rules pane and click the **rule** button to add a new rule as a **child** to the while loop.
- 21 In the **Destination Events** pane, expand the **GenericBlobOut** Event Type until the **Data** node is visible.
- 22 Drag the Data node into the Rule field of the Rule Properties pane. (See Figure 37).

Figure 37 Rule Properties

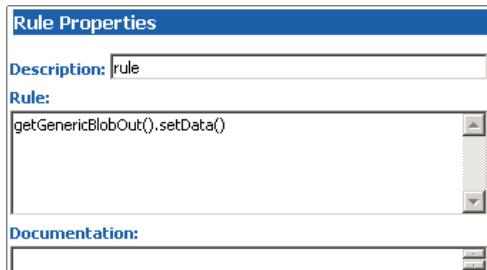


- 23 In the Rule Properties pane, position the cursor inside the parentheses of the `setData()` method. Then drag each of the five data nodes of DB_EMPLOYEE from the Source Events into the parentheses of the rule. (See Figure 38).

Figure 38 Rule Properties (Continued)

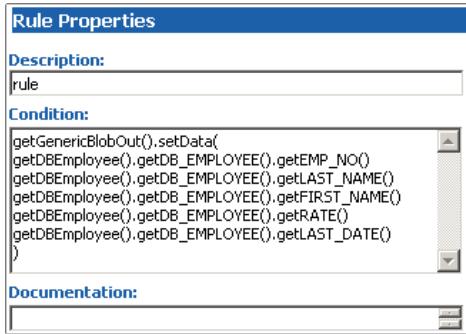


- 24 Edit the text of the condition to add a newline character and pipe (|) delimiters between each of the five data nodes. (See Figure 39).

Figure 39 Rule Properties (Continued)

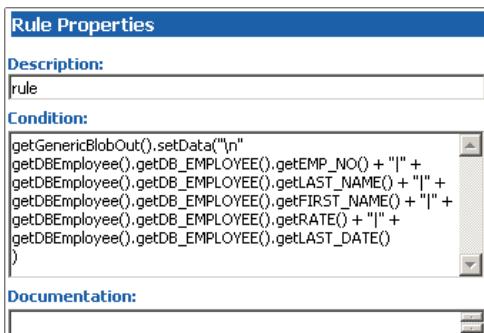

- 25 Select the newly edited rule in the **Business Rules** pane and click the **rule** button to add a new rule inside the while loop.
- 26 Drag the root node of the **GenericBlobOut** Event into the rule field in the **Rule Properties** pane.
- 27 Edit the rule; add a `send()` method as shown in Figure 40.

Figure 40 GenericBlobOut send()

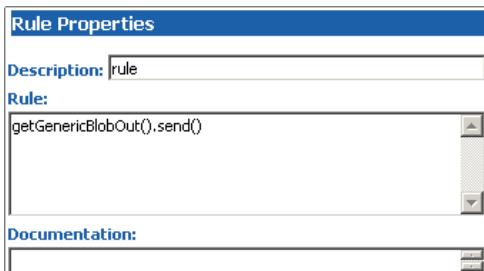

- 28 From the **File** menu, choose **Save** to save the file.
- 29 From the **File** menu, choose **Compile** to compile the Collaboration View the **Output** pane to ensure that there were no compiler errors.
- 30 From the **File** menu, choose **Close** to close the Java Collaboration Editor and return to the Collaboration Rule.
Note that the **Collaboration Rules** and **Initialization file** fields have been completed by close the Java Collaboration Editor.
- 31 Click **OK** to save and close the **DBSelect** Collaboration Rule.

4.4.4 Add and Configure the e*Ways

The sample scenario uses three e*Ways:

- **FileIn** – This e*Way retrieves an Event (text file) containing the database select criteria and publishes it to the **Q1** IQ.
- **DBSelect** – This e*Way retrieves the Generic Event (**Blob**) from the **Q1** IQ. This triggers the e*Way to request information from the external database (via the e*Way Connection) and publishes the results to the **Q2** IQ.
- **FileOut** – This e*Way retrieves the Generic Event (**Blob**) from the **Q2** IQ then writes it out to a text file on the local file system.

To create the **FileIn** e*Way:

- 1 In the Components pane of the Enterprise Manager, select the Control Broker and click the **New e*Way** button.
- 2 Enter **FileIn** for the component name and click **OK**.
- 3 Select the newly created e*Way and click the **Properties** button to display the e*Way's properties.
- 4 Use the **Find** button to select **stcewfile.exe** as the executable file.
- 5 Click **New** to create a new configuration file.
- 6 Enter the parameters for the e*Way as shown in Table 4.

Table 4 FileIn e*Way Parameters

Section Name	Parameter	Value
General Settings	AllowIncoming	YES
	AllowOutgoing	NO
	PerformanceTesting	default
Outbound (send) settings	All	default
Poller (inbound) settings	Polldirectory	c:\legate\data\dbSelect_In
	All Others	default
Performance Testing	All	default

- 7 Select **Save** from the **File** menu. Enter **FileIn** as the file name and click **Save**.

- 8 Select **Promote to Run Time** from the **File** menu. Click **OK** to close the e*Way configuration file editor.
- 9 In the **Start Up** tab of the e*Way properties, select the **Start automatically** check box.
- 10 Click **OK** to save the e*Way properties.

To create the DBSelect e*Way:

- 1 In the Components pane of the Enterprise Manager, select the Control Broker and click the **New e*Way** button.
- 2 Enter **DBSelect** for the component name and click **OK**.
- 3 Select the newly created e*Way and click the **Properties** button to display the e*Way's properties.
- 4 Use the **Find** button to select **stceway.exe** as the executable file.
- 5 Click **New** to create a new configuration file.
- 6 Enter the parameters for the e*Way as shown in Table 5.

Table 5 DBSelect e*Way Parameters

Section Name	Parameter	Value
JVM Settings	All	default

- 7 Select **Save** from the **File** menu. Enter **DBSelect** as the file name and click **Save**.
- 8 Select **Promote to Run Time** from the **File** menu. Click **OK** to close the configuration file editor.
- 9 In the **Start Up** tab of the Business Object Broker properties, select the **Start automatically** check box.
- 10 Click **OK** to save the e*Way's properties.

To create the FileOut e*Way:

- 1 In the Components pane of the Enterprise Manager, select the Control Broker and click the **New e*Way** button.
- 2 Enter **FileOut** for the component name and click **OK**.
- 3 Select the newly created e*Way and click the **Properties** button to display the e*Way's properties.
- 4 Use the **Find** button to select **stcewfile.exe** as the executable file.
- 5 Click **New** to create a new configuration file.
- 6 Enter the parameters for the e*Way as shown in Table 6.

Table 6 FileOut e*Way Parameters

Section Name	Parameter	Value
General Settings	AllowIncoming	NO
	AllowOutgoing	YES
	PerformanceTesting	default

Section Name	Parameter	Value
Outbound (send) settings	OutputDirectory	c:\legate\data\dbSelect_Out
	OutputFileName	dbSelect%d.dat
Poller (inbound) settings	All	default
Performance Testing	All	default

- 7 Select **Save** from the **File** menu. Enter **FileOut** as the file name and click **Save**.
- 8 Select **Promote to Run Time** from the **File** menu. Click **OK** to close the e*Way configuration file editor.
- 9 In the **Start Up** tab of the e*Way properties, select the **Start automatically** check box.
- 10 Click **OK** to save the e*Way properties.

4.4.5 Add and Configure the e*Way Connections

The sample scenario uses one e*Way Connection:

- **Sybase_eWc** – This e*Way Connection connects the **DBSelect** component to the external database and returns the requested records to be published to the Q2 IQ.

To create the e*Way Connection:

- 1 In the Components pane of the Enterprise Manager, select the e*Way Connections folder.
- 2 Click the **New e*Way Connection** button to add a new e*Way Connection.
- 3 Enter **Sybase_eWc** for the component name and click **OK**.
- 4 Select the newly created e*Way Connection and click the **Properties** button to display the e*Way Connection's properties.
- 5 Select **Sybase** from the e*Way Connection Type dropdown list.
- 6 Click **New** to create a new configuration file.
- 7 Enter the parameters for the e*Way Connection as shown in Table 7.

Table 7 Sybase_eWc e*Way Connection Parameters

Section Name	Parameter	Value
DataSource	class	default
	DriverType	default
	ServerName	Use the ODBC Data Source Name.
	PortNumber	Use the port number for your data source.
	DatabaseName	Use the database name listed in your ODBC entry.
	user name	Use local settings.
	password	Use local settings.
	timeout	default
connector	type	default
	class	default
	transaction mode	default
	connection establishment mode	default
	connection inactivity timeout	0
	connection verification interval	5 minutes

- 8 Select **Save** from the **File** menu. Enter **Sybase_eWc** as the file name and click **Save**.
- 9 Select **Promote to Run Time** from the **File** menu. Click **OK** to close the e*Way Connection configuration file editor.
- 10 Click **OK** to save the e*Way Connection's properties.

4.4.6 Add the IQs

The sample scenario uses two IQs

- **Q1** – This IQ queues the inbound Events for the DBSelect e*Way.
- **Q2** – This IQ queues the outbound Events for the FileOut e*Way.

To add the IQs:

- 1 In the components pane of the Enterprise Manager, select the IQ Manager.
- 2 Click the **New IQ** button to add a new IQ.
- 3 Enter the name **Q1** and click **Apply** to save the IQ and leave the New IQ dialog box open.
- 4 Enter the name **Q2** and click **OK** to save the second IQ.
- 5 Select the IQ Manager and click the **Properties** button.

- 6 Select the **Start automatically** check box and click **OK** to save the properties.

4.4.7 Add and Configure the Collaborations

The sample scenario uses three Collaborations:

- **FileIn_PassThru** – This Collaboration uses the **GenericPassThru** Collaboration Rule.
- **DBSelect_collab** – This Collaboration uses the **GenericEventToDatabase** Collaboration Rule to execute the **dbCollab.class** Java Collaboration file.
- **FileOut_PassThru** – This Collaboration uses the **GenericPassThru** Collaboration Rule.

To add the **FileIn_PassThru** Collaboration:

- 1 In the components pane of the Enterprise Manager, select the **FileIn e*Way**.
- 2 Click the **New Collaboration** button to create a new Collaboration.
- 3 Enter the name **FileIn_PassThru** and click **OK**.
- 4 Select the newly created Collaboration and click the **Properties** button.
- 5 Select **GenericPassThru** from the dropdown list of Collaboration Rules.
- 6 Click the upper **Add** button to add a new Subscription.
- 7 Select the **GenericEvent** Event Type and the **<External>** source.
- 8 Click the lower **Add** button to add a new Publication.
- 9 Select the **GenericEvent** Event Type and the **Q1** destination.
- 10 Click **OK** to close the Collaboration's properties.

To add the **DBselect_collab** Collaboration:

- 1 In the components pane of the Enterprise Manager, select the **DBSelect e*Way**.
- 2 Click the **New Collaboration** button to create a new Collaboration.
- 3 Enter the name **DBselect_collab** and click **OK**.
- 4 Select the newly created Collaboration and click the **Properties** button.
- 5 Select **GenericEventToDatabase** from the dropdown list of Collaboration Rules.
- 6 Click the upper **Add** button to add a new Subscription.
- 7 Select the **GenericEvent** Event Type and the **FileIn_PassThru** source.
- 8 Click the lower **Add** button to add a new Publication.
- 9 Select the **DBEmployee** Event Type and the **Sybase_CP** destination.
- 10 Click the lower **Add** button to add a new Publication.
- 11 Select the **GenericEvent** Event Type and the **Q2** destination.
- 12 Click **OK** to close the Collaboration's properties.

To add the FileOut_PassThru Collaboration:

- 1 In the components pane of the Enterprise Manager, select the **FileOut e*Way**.
- 2 Click the **New Collaboration** button to create a new Collaboration.
- 3 Enter the name **FileOut_PassThru** and click **OK**.
- 4 Select the newly created Collaboration and click the **Properties** button.
- 5 Select **GenericPassThru** from the dropdown list of Collaboration Rules.
- 6 Click the upper **Add** button to add a new Subscription.
- 7 Select the **GenericEvent** Event Type and the **DBSelect_collab** source.
- 8 Click the lower **Add** button to add a new Publication.
- 9 Select the **GenericEvent** Event Type and the **<External>** destination.
- 10 Click **OK** to close the Collaboration's properties.


4.4.8 Run the Schema

Running the sample Schema requires that a sample input file be created. Once the input file has been created, you can start the Control Broker from a command prompt to execute the Schema. After the Schema has been run, you can view the output text file to verify the results.

The sample input file

Use a text editor to create an input file to be read by the inbound file e*Way (**FileIn**). This simple input file contains the criteria for the **dbSelect.class** Collaboration's select statement. An example of an input file is shown in Figure 41.

Figure 41 Sample Input File

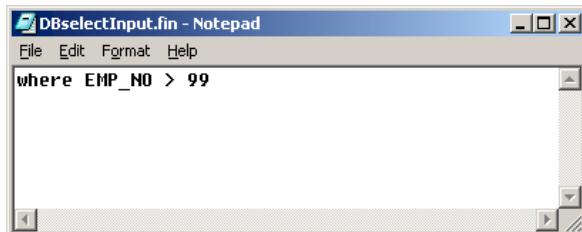**To start the Control Broker:**

From a command prompt, type the following command:

```
stccb -ln logical_name -rh registry -rs DBSelect -un user_name  
-up password
```

where

logical_name is the logical name of the Control Broker,

registry is the name of the Registry Host, and

user_name and *password* are a valid e*Gate username/password combination.

To verify the results:

Use a text editor to view the output file c:\eGate\data\dbSelect_out\dbSelect0.dat. Figure 42 shows an example of the records that were returned by the sample schema.

Figure 42 Sample Output File



Sybase e*Way Methods

The Sybase e*Way contains Java methods that are used to extend the functionality of the e*Way. These methods are contained in the following classes:

- [com.stc.eways.jdbcx.StatementAgent Class](#) on page 56
- [com.stc.eways.jdbcx.PreparedStatementAgent Class](#) on page 66
- [com.stc.eways.jdbcx.PreparedStatementResultSet Class](#) on page 78
- [com.stc.eways.jdbcx.SqlStatementAgent Class](#) on page 104
- [com.stc.eways.jdbcx.CallableStatementAgent Class](#) on page 106
- [com.stc.eways.jdbcx.TableResultSet Class](#) on page 118

5.1 com.stc.eways.jdbcx.StatementAgent Class

```
java.lang.Object
|
+-- com.stc.eways.jdbcx.StatementAgent
```

All Implemented Interfaces

ResetEventListener, SessionEventListener

Direct Known Subclasses

PreparedStatementAgent, SQLStatementAgent, TableResultSet

```
public abstract class StatementAgent
extends java.lang.Object
```

Implements SessionEventListener, ResetEventListener

Abstract class for other Statement Agent.

Methods of the StatementAgent

[cancel](#) on page 64
[clearWarnings](#) on page 65
[getFetchDirection](#) on page 61
[getMaxFieldSize](#) on page 63
[getMoreResults](#) on page 64
[getResultSetConcurrency](#) on page 60
[getUpdateCount](#) on page 63
[isClosed](#) on page 58
[queryName](#) on page 58
[resultSetConcurToString](#) on page 58
[resultSetTypeToString](#) on page 57
[sessionOpen](#) on page 59
[setEscapeProcessing](#) on page 60
[setMaxFieldSize](#) on page 63
[setQueryTimeout](#) on page 61
[stmtInvoke](#) on page 65

[clearBatch](#) on page 64
[executeBatch](#) on page 64
[getFetchSize](#) on page 62
[getMaxRows](#) on page 62
[getResultSet](#) on page 63
[getResultSetType](#) on page 59
[getWarnings](#) on page 65
[queryDescription](#) on page 58
[resetRequested](#) on page 59
[resultSetDirToString](#) on page 57
[sessionClosed](#) on page 59
[setCursorName](#) on page 60
[setFetchDirection](#) on page 61
[setMaxRows](#) on page 62
[setQueryTimeout](#) on page 61

resultSetTypeToString

This method gets the symbol string corresponding to the ResultSet type enumeration.

```
public static java.lang.String resultSetTypeToString(int type)
```

Name	Description
type	ResultSet type.

Returns

Enumeration symbol string.

resultSetDirToString

This method gets the symbol string corresponding to the ResultSet direction enumeration.

```
public static java.lang.String resultSetDirToString(int dir)
```

Name	Description
dir	ResultSet scroll directions.

Returns

Enumeration symbol string.

resultSetConcurToString

This method gets the symbol string corresponding to the ResultSet concurrency enumeration.

```
public static java.lang.String resultSetConcurToString(int concur)
```

Name	Description
concur	ResultSet concurrency.

Returns

Enumeration symbol string.

isClosed

This method returns the statement agent's close status.

```
public boolean isClosed()
```

Returns

True if the statement agent is closed.

queryName

This method supplies the name of the listener.

```
public java.lang.String queryName()
```

Specified By

queryName in interface SessionEventListener.

Returns

The listener's class name.

queryDescription

This method gives a description of the query.

```
public java.lang.String queryDescription()
```

Returns

The description of the query.

sessionOpen

Opens the session event handler.

```
public void sessionOpen(SessionEvent evt)
```

Specified by

sessionOpen in interface SessionEventListener

Name	Description
evt	Session event.

sessionClosed

Closes the session event handler.

```
public void sessionClosed(SessionEvent evt)
```

Specified by

sessionClosed in interface SessionEventListener

Name	Description
evt	Session event.

resetRequested

Resets the event handler.

```
public void resetRequested(ResetEvent evt)
```

Specified by

resetRequested in interface ResetEventListener

Name	Description
evt	Requested Reset event.

Throws

`java.sql.SQLException`

getResultSetType

Returns the result set scroll type.l

```
public int getResultSetType()
```

Returns

ResultSet type

Throws

java.sql.SQLException

getResultSetConcurrency

Returns the result set concurrency mode.

```
public int getResultSetConcurrency()
```

Returns

ResultSet concurrency

Throws

java.sql.SQLException

setEscapeProcessing

Sets escape syntax processing

```
public void setEscapeProcessing (boolean bEscape)
```

Name	Description
bEscape	True to enable False to disable

Throws

java.sql.SQLException

setCursorName

Sets result set cursor name.

```
public void setCursorName(java.lang.String sName)
```

Name	Description
sName	Cursor name.

Throws

java.sql.SQLException

setQueryTimeout

Returns query timeout duration.

```
public int getQueryTimeout()
```

Returns

The number of seconds to wait before timeout.

Throws

```
java.sql.SQLException
```

setQueryTimeout

Sets the query timeout duration

```
public void setQueryTimeout(int nInterval)
```

Name	Description
nInterval	The number of seconds before timeout.

Throws

```
java.sql.SQLException
```

getFetchDirection

Returns result set fetch direction.

```
public int getFetchDirection()
```

Returns

The fetch direction of the ResultSet: `FETCH_FORWARD`, `FETCH_REVERSE`, `FETCH_UNKNOWN`.

Throws

```
java.sql.SQLException
```

setFetchDirection

Sets result set fetch direction.

```
public void setFetchDirection (int iDir)
```

Name	Description
iDir	The fetch direction of the ResultSet: FETCH_FORWARD, FETCH_REVERSE, FETCH_UNKNOWN.

Throws

`java.sql.SQLException`

getFetchSize

Returns the result set prefetch record count.

`public int getFetchSize()`

Returns

The fetch size this StatementAgent object set.

Throws

`java.sql.SQLException`

getMaxRows

Returns the maximum number of fetch records.

`public int getMaxRows()`

Returns

The maximum number of rows that a ResultSetAgent may contain.

Throws

`java.sql.SQLException`

setMaxRows

Sets the maximum number of fetch records.

`public void setMaxRows (int nRow)`

Name	Description
nRow	The maximum number of rows in the ResultSetAgent.

Throws

`java.sql.SQLException`

getMaxFieldSize

Returns the maximum field data size.

```
public int getMaxFieldSize()
```

Returns

The maximum number of bytes that a ResultSetAgent column may contain; 0 means no limit.

Throws

```
java.sql.SQLException
```

setMaxFieldSize

Sets the maximum field data size.

```
public void setMaxFieldSize (int nSize)
```

Name	Description
nSize	The maximum size for a column in a ResultSetAgent.

Throws

```
java.sql.SQLException
```

getUpdateCount

Returns the records count of the last executed statement.

```
public int getUpdateCount()
```

Returns

The number of rows affected by an updated operation. 0 if no rows were affected or the operation was a DDL command. -1 if the result is a ResultSetAgent or there are no more results.

Throws

```
java.sql.SQLException
```

getResultSet

Returns the result set of the last executed statement.

```
public ResultSetAgent getResultSet()
```

Returns

The ResultSetAgent that was produced by the call to the method execute.

Throws

java.sql.SQLException

getMoreResults

Returns if there are more result sets.

```
public boolean getMoreResults()
```

Returns

True if the next result is a ResultSetAgent; False if it is an integer indicating an update count or there are no more results).

Throws

java.sql.SQLException

clearBatch

Clears the batch operation.

```
public void clearBatch()
```

Throws

java.sql.SQLException

executeBatch

Executes batch statements.

```
public int[] executeBatch ()
```

Returns

An array containing update counts that correspond to the commands that executed successfully. An update count of -2 means the command was successful but that the number of rows affected is unknown.

Throws

java.sql.SQLException

cancel

Cancels a statement that is being executed.

```
public void cancel()
```

Throws

java.sql.SQLException

getWarnings

Returns SQL warning object.

```
public java.sql.SQLWarning getWarnings()
```

Returns

The first SQL warning or null if there are no warnings.

Throws

java.sql.SQLException

clearWarnings

Clear all SQL Warning objects.

```
public void clearWarnings()
```

Throws

java.sql.SQLException

stmtInvoke

Invokes a method of the database Statement object of this ETD.

```
public java.lang.Object stmtInvoke (java.lang.String methodName,  
java.lang.Class[] argsCls, java.lang.Object[] args)
```

Name	Description
methodName	The name of the method.
argsCls	Class array for types of formal arguments for method, in the declared order. Can be null if there are no formal arguments. However, cannot invoke constructor here.
args	Object array of formal arguments for method in the declared order. Can be null if there are no formal arguments. However, cannot invoke constructor here.

Returns

The Object instance resulting from the method invocation. Can be null if nothing is returned (void return declaration).

Throws

java.lang.Exception. Whatever exception the invoked method throws.

5.2 com.stc.eways.jdbcx.PreparedStatementAgent Class

```
java.lang.Object
|
+--com.stc.eways.jdbcx.StatementAgent
|
+-- com.stc.eways.jdbcx.PreparedStatementAgent
```

All Implemented Interfaces

ResetEventListener, SessionEventListener

Direct Known Subclasses

CallableStatementAgent

```
public class PreparedStatementAgent
extends StatementAgent
```

Agent hosts PreparedStatement Object

Methods of the PreparedStatementAgent

addBatch on page 77	clearParameters on page 77
execute on page 77	executeQuery on page 77
executeUpdate on page 77	sessionOpen on page 108
setArray on page 75	setAsciiStream on page 74
setBigDecimal on page 71	setBinaryStream on page 74
setBlob on page 76	setBoolean on page 69
setByte on page 69	setBytes on page 74
setCharacterStream on page 75	 setClob on page 76
setDate on page 71	setDate on page 72
setDouble on page 71	setFloat on page 70
setInt on page 70	setLong on page 70
setNull on page 67	setObject on page 67
setObject on page 68	setObject on page 68
setRef on page 76	setShort on page 69
setString on page 73	setTime on page 72
setTime on page 72	setTimestamp on page 73
setTimestamp on page 73	

sessionOpen

Opens the session event handler.

```
public void sessionOpen(SessionEvent evt)
```

Overrides

sessionOpen in class StatementAgent

Name	Description
evt	Session event.

setNull

Nullify value of indexed parameter.

```
public void setNull(int index, int type)
```

Name	Description
index	Parameter index starting from 1.
type	A JDBC type defined by inava.sql.Types

Throws

java.sql.SQLException

setNull

Nullify value of indexed parameter.

```
public void setNul(int index, int type, java.lang.String tname)
```

Name	Description
index	Parameter index starting from 1.
type	A JDBC type defined by inava.sql.Types
tname	The fully-qualified name of the parameter being set. If type is not REF, STRUCT, DISTINCT, or JAVA_OBJECT, this parameter will be ignored.

Throws

java.sql.SQLException

setObject

Sets value of indexed parameter with an object.

```
public void setObject(int index, java.lang.Object ob)
```

Name	Description
index	Parameter index starting from 1.
ob	An instance of a Java Object containing the input parameter value.

Throws

java.sql.SQLException

setObject

Sets value of indexed parameter with an object.

```
public void setObject(int index, java.lang.Object ob, int iType)
```

Name	Description
index	Parameter index starting from 1.
ob	An instance of a Java Object containing the input parameter value.
iType	A JDBC type defined by inava.sql.Types

Throws

java.sql.SQLException

setObject

Sets value of indexed parameter with an object.

```
public void setObject(int index, java.lang.Object ob, int iType, int iScale)
```

Name	Description
index	Parameter index starting from 1.
ob	An instance of a Java Object containing the input parameter value.
iType	A JDBC type defined by inava.sql.Types
iScale	The number of digits to the right of the decimal point. Only applied to DECIMAL and NUMERIC types

Throws

`java.sql.SQLException`

setBoolean

Sets the boolean value of the indexed parameter.

```
public void setBoolean(int index, boolean b)
```

Name	Description
index	Parameter index starting from 1.
b	true or false.

Throws

`java.sql.SQLException`

setByte

Sets the byte value of the indexed parameter.

```
public void setByte(int index, byte byt)
```

Name	Description
index	Parameter index starting from 1.
byt	The byte parameter value to be set.

Throws

`java.sql.SQLException`

setShort

Sets the short value of the indexed parameter.

```
public void setShort(int index, short si)
```

Name	Description
index	Parameter index starting from 1.
si	The short parameter value to be set.

Throws

`java.sql.SQLException`

setInt

Sets the integer value of the indexed parameter.

```
public void setInt(int index, int i)
```

Name	Description
index	Parameter index starting from 1.
i	The integer parameter value to be set.

Throws

`java.sql.SQLException`

setLong

Sets the long value of the indexed parameter.

```
public void setLong(int index, long l)
```

Name	Description
index	Parameter index starting from 1.
l	The long parameter value to be set.

Throws

`java.sql.SQLException`

setFloat

Sets the float value of the indexed parameter.

```
public void setFloat(int index, float f)
```

Name	Description
index	Parameter index starting from 1.
f	The float parameter value to be set.

Throws

`java.sql.SQLException`

setDouble

Sets the double value of the indexed parameter.

```
public void setDouble(int index, double d)
```

Name	Description
index	Parameter index starting from 1.
d	The double parameter value to be set.

Throws

`java.sql.SQLException`

setBigDecimal

Sets the decimal value of the indexed parameter.

```
public void setBigDecimal(int index, java.math.BigDecimal dec)
```

Name	Description
index	Parameter index starting from 1.
dec	The BigDecimal parameter value to be set.

Throws

`java.sql.SQLException`

setDate

Sets the date value of the indexed parameter.

```
public void setDate(int index, java.sql.Date date)
```

Name	Description
index	Parameter index starting from 1.
date	The Date parameter value to be set.

Throws

`java.sql.SQLException`

setDate

Sets the date value of indexed parameter with time zone from calendar.

```
public void setDate(int index, java.sql.Date date, java.util.Calendar  
cal)
```

Name	Description
index	Parameter index starting from 1.
date	The Date parameter value to be set.
cal	The calender object used to construct the date.

Throws

java.sql.SQLException

setTime

Sets the time value of the indexed parameter.

```
public void setTime(int index, java.sql.Time t)
```

Name	Description
index	Parameter index starting from 1.
t	The Time parameter value to be set.

Throws

java.sql.SQLException

setTime

Sets the time value of the indexed parameter.

```
public void setTime(int index, java.sql.Time t, java.util.Calendar  
cal)
```

Name	Description
index	Parameter index starting from 1.
t	The Time parameter value to be set.
cal	The Calendar object used to construct the time.

Throws

java.sql.SQLException

setTimestamp

Sets the timestamp value of the indexed parameter.

```
public void setTimestamp(int index, java.sql.Timestamp ts)
```

Name	Description
index	Parameter index starting from 1.
ts	The Timestamp parameter value to be set.

Throws

java.sql.SQLException

setTimestamp

Sets the timestamp value of the indexed parameter with the time zone from the calendar.

```
public void setTimestamp(int index, java.sql.timestamp ts,  
java.util.Calendar cal)
```

Name	Description
index	Parameter index starting from 1.
ts	The Timestamp parameter value to be set.
cal	The Calendar object used to construct the timestamp.

Throws

java.sql.SQLException

setString

Sets the string value of the indexed parameter.

```
public void setString(int index, java.lang.String s)
```

Name	Description
index	Parameter index starting from 1.

Name	Description
s	The String parameter value to be set.

Throws

`java.sql.SQLException`

setBytes

Sets the byte array value of the indexed parameter.

`public void setBytes(int index, byte[] bytes)`

Name	Description
index	Parameter index starting from 1.
bytes	The byte array parameter value to be set.

Throws

`java.sql.SQLException`

setAsciiStream

Sets the character value of the indexed parameter with an input stream and specified length.

`public void setAsciiStream(int index, java.io.InputStream is, int length)`

Name	Description
index	Parameter index starting from 1.
is	The InputStream that contains the Ascii parameter value to be set.
length	The number of bytes to be read from the stream and sent to the database.

Throws

`java.sql.SQLException`

setBinaryStream

Sets the binary value of the indexed parameter with an input stream and specified length.

```
public void setBinaryStream(int index, java.io.InputStream is, int length)
```

Name	Description
index	Parameter index starting from 1.
is	The InputStream that contains the binary parameter value to be set.
length	The number of bytes to be read from the stream and sent to the database.

Throws

java.sql.SQLException

setCharacterStream

Sets the character value of the indexed parameter with a reader stream and specified length.

```
public void setCharacterStream(int index, java.io.Reader rd, int length)
```

Name	Description
index	Parameter index starting from 1.
rd	The Reader that contains the Unicode parameter value to be set.
length	The number of characters to be read from the stream and sent to the database.

Throws

java.sql.SQLException

setArray

Sets the Array value of the indexed parameter.

```
public void setArray(int index, java.sql.Array a)
```

Name	Description
index	Parameter index starting from 1.
a	The Array value to be set.

Throws

java.sql.SQLException

setBlob

Sets the Blob value of the indexed parameter.

```
public void setBlob(int index, java.sql.Blob blob)
```

Name	Description
index	Parameter index starting from 1.
blob	The Blob value to be set.

Throws

java.sql.SQLException

setClob

Sets the Clob value of the indexed parameter.

```
public void setClob(int index, java.sql.Clob clob)
```

Name	Description
index	Parameter index starting from 1.
clob	The Clob value to be set.

Throws

java.sql.SQLException

setRef

Sets the Ref value of the indexed parameter.

```
public void setRef(int index, java.sql.Ref ref)
```

Name	Description
index	Parameter index starting from 1.
ref	The Ref parameter value to be set.

Throws

java.sql.SQLException

clearParameters

Clears the parameters of all values.

```
public void clearParameters()
```

Throws

```
java.sql.SQLException
```

addBatch

Adds a set of parameters to the list of commands to be sent as a batch.

```
public void addBatch()
```

Throws

```
java.sql.SQLException
```

execute

Executes the Prepared SQL statement.

```
public void execute()
```

Throws

```
java.sql.SQLException
```

executeQuery

Executes the prepared SQL query and returns a ResultSetAgent that contains the generated result set.

```
public ResultSetAgent executeQuery()
```

Returns

ResultSetAgent or null.

Throws

```
java.sql.SQLException
```

executeUpdate

Executes the prepared SQL statement and returns the number of rows that were affected.

```
public int executeUpdate()
```

Returns

The number of rows affected by the update operation; 0 if no rows were affected.

Throws

java.sql.SQLException

5.3 **com.stc.eways.jdbcx.PreparedStatementResultSet Class**

java.lang.Object

|

+ -- **com.stc.eways.jdbcx.PreparedStatementResultSet**

 public abstract class PreparedStatementResultSet
 extends java.lang.Object

Base class for Result Set returned from a Prepared Statement execution.

Constructors of PreparedStatementResultSet

PreparedStatementResultSet

Methods of PreparedStatementResultSet

- [absolute](#) on page 82
- [beforeFirst](#) on page 84
- [close](#) on page 82
- [findColumn](#) on page 85
- [getArray](#) on page 99
- [getAsciiStream](#) on page 98
- [getBigDecimal](#) on page 91
- [getBinaryStream](#) on page 98
- [getBlob](#) on page 100
- [getBoolean](#) on page 87
- [getByte](#) on page 88
- [getBytes](#) on page 97
- [getCharacterStream](#) on page 99
- [getBlob](#) on page 100
- [getConcurrency](#) on page 80
- [getDate](#) on page 92
- [getDate](#) on page 93
- [getDouble](#) on page 91
- [getFetchDirection](#) on page 80
- [getFloat](#) on page 90
- [getInt](#) on page 89
- [getLong](#) on page 89
- [getMetaData](#) on page 80
- [getObject](#) on page 86
- [getObject](#) on page 87
- [getRef](#) on page 102
- [getShort](#) on page 88
- [getString](#) on page 96
- [getTime](#) on page 93
- [getTime](#) on page 94
- [getTimestamp](#) on page 95
- [getTimestamp](#) on page 95
- [getType](#) on page 85
- [insertRow](#) on page 103
- [isBeforeFirst](#) on page 84
- [afterLast](#) on page 84
- [clearWarnings](#) on page 102
- [deleteRow](#) on page 103
- [first](#) on page 83
- [getArray](#) on page 99
- [getAsciiStream](#) on page 98
- [getBigDecimal](#) on page 92
- [getBinaryStream](#) on page 99
- [getBlob](#) on page 100
- [getBoolean](#) on page 87
- [getByte](#) on page 88
- [getBytes](#) on page 97
- [getCharacterStream](#) on page 99
- [getBlob](#) on page 101
- [getCursorName](#) on page 82
- [getDate](#) on page 92
- [getDate](#) on page 93
- [getDouble](#) on page 91
- [getFetchSize](#) on page 81
- [getFloat](#) on page 91
- [getInt](#) on page 89
- [getLong](#) on page 90
- [getObject](#) on page 85
- [getObject](#) on page 86
- [getRef](#) on page 101
- [getRow](#) on page 103
- [getShort](#) on page 88
- [getString](#) on page 96
- [getTime](#) on page 93
- [getTime](#) on page 94
- [getTimestamp](#) on page 95
- [getTimestamp](#) on page 96
- [getWarnings](#) on page 102
- [isAfterLast](#) on page 85
- [isFirst](#) on page 83

[isLast](#) on page 84
[next](#) on page 82
[refreshRow](#) on page 124
[getFetchDirection](#) on page 80
[updateRow](#) on page 103

[last](#) on page 83
[previous](#) on page 82
[relative](#) on page 83
[getFetchSize](#) on page 81
[wasNull](#) on page 102

Constructor PreparedStatementResultSet

Constructs a Prepared Statement Result Set object.

```
public PreparedStatementResultSet(ResultSetAgent rsAgent)
```

Name	Description
rsAgent	The ResultSetAgent underlying control.

getMetaData

Retrieves a ResultSetMetaData object that contains ResultSet properties.

```
public java.sql.ResultSetMetaData getMetaData()
```

Returns

ResultSetMetaData object

Throws

java.sql.SQLException

getConcurrency

Gets the concurrency mode for this ResultSet object.

```
public int getConcurrency()
```

Returns

Concurrency mode

Throws

java.sql.SQLException

getFetchDirection

Gets the direction suggested to the driver as the row fetch direction.

```
public int getFetchDirection()
```

Returns

Row fetch direction

Throws

java.sql.SQLException

setFetchDirection

Gives the driver a hint as to the row process direction.

```
public void setFetchDirection(int iDir)
```

Name	Description
iDir	Fetch direction to use.

Throws

java.sql.SQLException

getFetchSize

Gets the number of rows to fetch suggested to the driver.

```
public int getFetchSize()
```

Returns

Number of rows to fetch at a time.

Throws

java.sql.SQLException

setFetchSize

Gives the drivers a hint as to the number of rows that should be fetched each time.

```
public void setFetchSize(int nSize)
```

Name	Description
nSize	Number of rows to fetch at a time.

Throws

java.sql.SQLException

getCursorName

Retrieves the name for the cursor associated with this ResultSet object.

```
public java.lang.String getCursorName()
```

Returns

Name of cursor

Throws

```
java.sql.SQLException
```

close

Immediately releases a ResultSet object's resources.

```
public void close()
```

Throws

```
java.sql.SQLException
```

next

Moves the cursor to the next row of the result set.

```
public boolean next()
```

Returns

true if successful

Throws

```
java.sql.SQLException
```

previous

Moves the cursor to the previous row of the result set.

```
public boolean previous()
```

Returns

true if successful

Throws

```
java.sql.SQLException
```

absolute

Moves the cursor to the specified row of the result set.

```
public boolean absolute(int index)
```

Returns

true if successful

Throws

java.sql.SQLException

relative

Moves the cursor to the specified row relative to the current row of the result set.

```
public boolean relative(int index)
```

Returns

true if successful

Throws

java.sql.SQLException

first

Moves the cursor to the first row of the result set.

```
public boolean first()
```

Returns

true if successful

Throws

java.sql.SQLException

isFirst

Determines whether the cursor is on the first row of the result set.

```
public boolean isFirst()
```

Returns

true if on the first row.

Throws

java.sql.SQLException

last

Moves the cursor to the last row of the result set.

```
public boolean last()
```

Returns

true if successful

Throws

java.sql.SQLException

isLast

Determines whether the cursor is on the last row of the result set.

```
public boolean isLast()
```

Returns

true if on the last row

Throws

java.sql.SQLException

beforeFirst

Moves the cursor before the first row of the result set.

```
public void beforeFirst()
```

Throws

java.sql.SQLException

isBeforeFirst

Determines whether the cursor is before the first row of the result set.

```
public boolean isBeforeFirst()
```

Returns

true if before the first row

Throws

java.sql.SQLException

afterLast

Moves the cursor after the last row of the result set.

```
public void afterLast()
```

Throws

java.sql.SQLException

isAfterLast

Determines whether the cursor is after the last row of the result set.

```
public boolean isAfterLast()
```

Returns

true if after the last row

Throws

```
java.sql.SQLException
```

getType

Retrieves the scroll type of cursor associated with the result set.

```
public int getType()
```

Returns

Scroll type of cursor.

Throws

```
java.sql.SQLException
```

findColumn

Returns the column index for the named column in the result set.

```
public int findColumn(java.lang.String index)
```

Name	Description
index	Column name.

Returns

Corresponding column index.

Throws

```
java.sql.SQLException
```

getObject

Gets the object value of the specified column.

```
public java.lang.Object getObject(int index)
```

Name	Description
index	Column index.

Returns

Object form of column value.

Throws

java.sql.SQLException

getObject

Gets the object value of the specified column.

```
public java.lang.Object getObject(java.lang.String index)
```

Name	Description
index	Column index.

Returns

Object form of column value.

Throws

java.sql.SQLException

getObject

Gets the object value of the specified column using the given type map.

```
public java.lang.Object getObject(int index, java.util.Map map)
```

Name	Description
index	Column index.
map	Type map.

Returns

Object form of column value.

Throws

java.sql.SQLException

getObject

Gets the object value of the specified column using the given type map.

```
public java.lang.Object getObject(java.lang.String index,  
java.util.Map map)
```

Name	Description
index	Column index.
map	Type map.

Returns

Object form of column value.

Throws

java.sql.SQLException

getBoolean

Gets the boolean value of the specified column.

```
public boolean getBoolean(int index)
```

Name	Description
index	Column index.

Returns

Boolean value of the column.

Throws

java.sql.SQLException

getBoolean

Gets the boolean value of the specified column.

```
public boolean getBoolean(java.lang.String index)
```

Name	Description
index	Column name.

Returns

Boolean value of the column.

Throws

`java.sql.SQLException`

getByte

Gets the byte value of the specified column.

```
public byte getByte(int index)
```

Name	Description
index	Column index.

Returns

Boolean value of the column.

Throws

`java.sql.SQLException`

getShort

Gets the short value of the specified column.

```
public short getShort(int index)
```

Name	Description
index	Column index.

Returns

Short value of the column.

Throws

`java.sql.SQLException`

getShort

Gets the short value of the specified column.

```
public short getShort(java.lang.String index)
```

Name	Description
index	Column name.

Returns

Short value of the column.

Throws

java.sql.SQLException

getInt

Gets the integer value of the specified column.

```
public int getInt(int index)
```

Name	Description
index	Column index.

Returns

Int value of the column.

Throws

java.sql.SQLException

getInt

Gets the integer value of the specified column.

```
public int getInt(java.lang.String index)
```

Name	Description
index	Column name.

Returns

Int value of the column.

Throws

java.sql.SQLException

getLong

Gets the long value of the specified column.

```
public long getLong(int index)
```

Name	Description
index	Column index.

Returns

Long value of the column.

Throws

java.sql.SQLException

getLong

Gets the long value of the specified column.

```
public long getLong(java.lang.String index)
```

Name	Description
index	Column name.

Returns

Long value of the column.

Throws

java.sql.SQLException

getFloat

Gets the float value of the specified column.

```
public float getFloat(int index)
```

Name	Description
index	Column index.

Returns

Float value of the column.

Throws

java.sql.SQLException

getFloat

Gets the float value of the specified column.

```
public float getFloat(java.lang.String index)
```

Name	Description
index	Column name.

Returns

Float value of the column.

Throws

```
java.sql.SQLException
```

getDouble

Gets the double value of the specified column.

```
public double getDouble(int index)
```

Name	Description
index	Column index.

Returns

Double value of the column.

Throws

```
java.sql.SQLException
```

getBigDecimal

Gets the decimal value of the specified column.

```
public java.math.BigDecimal getBigDecimal(int index)
```

Name	Description
index	Column index.

Returns

Big decimal value of the column.

Throws

java.sql.SQLException

getBigDecimal

Gets the decimal value of the specified column.

```
public java.math.BigDecimal getBigDecimal(java.lang.String index)
```

Name	Description
index	Column name.

Returns

Big decimal value of the column.

Throws

java.sql.SQLException

getDate

Gets the date value of the specified column.

```
public java.sql.Date getDate(int index)
```

Name	Description
index	Column index.

Returns

Date value of the column.

Throws

java.sql.SQLException

getDate

Gets the date value of the specified column.

```
public java.sql.Date getDate(java.lang.String index)
```

Name	Description
index	Column name.

Returns

Date value of the column.

Throws

java.sql.SQLException

getDate

Gets the date value of the specified column using the time zone from the calendar.

```
public java.sql.Date getDate(java.lang.String index,  
                           java.util.Calendar calendar)
```

Name	Description
index	Column name.
calendar	Calendar to use.

Returns

Date value of the column.

Throws

java.sql.SQLException

getTime

Gets the time value of the specified column.

```
public java.sql.Time getTime(int index)
```

Name	Description
index	Column index.

Returns

Time value of the column.

Throws

java.sql.SQLException

getTime

Gets the time value of the specified column.

```
public java.sql.Time getTime(java.lang.String index)
```

Name	Description
index	Column name.

Returns

Time value of the column.

Throws

java.sql.SQLException

getTime

Gets the time value of the specified column.

```
public java.sql.Time getTime(int index, java.util.Calendar calendar)
```

Name	Description
index	Column index.
calendar	Calendar to use.

Returns

Time value of the column.

Throws

java.sql.SQLException

getTime

Gets the time value of the specified column.

```
public java.sql.Time getTime(java.lang.String index,  
                           java.util.Calendar calendar)
```

Name	Description
index	Column name.
calendar	Calendar to use.

Returns

Time value of the column.

Throws

java.sql.SQLException

getTimestamp

Gets the timestamp value of the specified column.

```
public java.sql.Timestamp getTimestamp(int index)
```

Name	Description
index	Column index.

Returns

The timestamp value of the column.

Throws

```
java.sql.SQLException
```

getTimestamp

Gets the timestamp value of the specified column.

```
public java.sql.Timestamp getTimestamp(java.lang.String index)
```

Name	Description
index	Column name.

Returns

The timestamp value of the column.

Throws

```
java.sql.SQLException
```

getTimestamp

Gets the timestamp value of the specified column using the time zone from the calendar.

```
public java.sql.Timestamp getTimestamp(int index, java.util.Calendar calendar)
```

Name	Description
index	Column index.

Returns

The timestamp value of the column.

Throws

java.sql.SQLException

getTimestamp

Gets the timestamp value of the specified column using the time zone from the calendar.

```
public java.sql.Timestamp getTimestamp(java.lang.String index,  
java.util.Calendar calendar)
```

Name	Description
index	Column name.
calendar	Calendar to use.

Returns

The timestamp value of the column.

Throws

java.sql.SQLException

getString

Gets the string value of the specified column.

```
public java.lang.String getString(int index)
```

Name	Description
index	Column index.

Returns

Returns the String value of the column.

Throws

java.sql.SQLException

getString

Gets the string value of the specified column.

```
public java.lang.String getString(java.lang.String index)
```

Name	Description
index	Column name.

Returns

Returns the String value of the column.

Throws

java.sql.SQLException

getBytes

Gets the byte array value of the specified column.

```
public byte[] getBytes(int index)
```

Name	Description
index	Column index.

Returns

Byte array value of the column.

Throws

java.sql.SQLException

getBytes

Gets the byte array value of the specified column.

```
public byte[] getBytes(java.lang.String index)
```

Name	Description
index	Column name.

Returns

Byte array value of the column.

Throws

java.sql.SQLException

getAsciiStream

Retrieves the value of the specified column value as a stream of ASCII characters.

```
public java.io.InputStream getAsciiStream(int index)
```

Name	Description
index	Column index.

Returns

ASCII output stream value of the column.

Throws

```
java.sql.SQLException
```

getAsciiStream

Retrieves the value of the specified column value as a stream of ASCII characters.

```
public java.io.InputStream getAsciiStream(java.lang.String index)
```

Name	Description
index	Column name.

Returns

ASCII output stream value of the column.

Throws

```
java.sql.SQLException
```

getBinaryStream

Retrieves the value of the specified column as a stream of uninterpreted bytes.

```
public java.io.InputStream getBinaryStream(int index)
```

Name	Description
index	Column index.

Returns

Binary out steam value of the column.

Throws

java.sql.SQLException

getBinaryStream

Retrieves the value of the specified column as a stream of uninterpreted bytes.

```
public java.io.InputStream getBinaryStream(java.lang.String index)
```

Name	Description
index	Column name.

Returns

Binary output stream value of the column.

Throws

java.sql.SQLException

getCharacterStream

Retrieves the value of the specified column as a Reader object.

```
public java.io.Reader getCharacterStream(int index)
```

Name	Description
index	Column index.

Returns

Reader for value in the column.

Throws

java.sql.SQLException

getArray

Gets the Array value of the specified column.

```
public java.sql.Array getArray(int index)
```

Name	Description
index	Column index.

Returns

Array value of the column.

Throws

java.sql.SQLException

getBlob

Gets the Blob value of the specified column.

```
public java.sql.Blob getBlob(int index)
```

Name	Description
index	Column index.

Returns

Blob value of the column.

Throws

java.sql.SQLException

getBlob

Gets the Blob value of the specified column.

```
public java.sql.Blob getBlob(java.lang.String index)
```

Name	Description
index	Column name.

Returns

Blob value of the column.

Throws

java.sql.SQLException

getClob

Gets the Clob value of the specified column.

```
public java.sql.Clob getClob(int index)
```

Name	Description
index	Column index.

Returns

Clob value of the column.

Throws

java.sql.SQLException

getBlob

Gets the Blob value of the specified column.

```
public java.sql.Blob getBlob(java.lang.String index)
```

Name	Description
index	Column name.

Returns

Blob value of the column.

Throws

java.sql.SQLException

getRef

Gets the Ref value of the specified column.

```
public java.sql.Ref getRef(int index)
```

Name	Description
index	Column index.

Returns

Ref value of the column.

Throws

java.sql.SQLException

getRef

Gets the Ref value of the specified column.

```
public java.sql.Ref getRef(java.lang.String index)
```

Name	Description
index	Column name.

Returns

Ref value of the column.

Throws

```
java.sql.SQLException
```

wasNull

Checks to see if the last value read was SQL NULL or not.

```
public boolean wasNull()
```

Returns

true if SQL NULL.

Throws

```
java.sql.SQLException
```

getWarnings

Gets the first SQL Warning that has been reported for this object.

```
public java.sql.SQLWarning getWarnings()
```

Returns

SQL warning.

Throws

```
java.sql.SQLException
```

clearWarnings

Clears any warnings reported on this object.

```
public void clearWarnings()
```

Throws

```
java.sql.SQLException
```

getRow

Retrieves the current row number in the result set.

```
public int getRow()
```

Returns

Current row number

Throws

```
java.sql.SQLException
```

refreshRow

Replaces the values in the current row of the result set with their current values in the database.

```
public void refreshRow()
```

Throws

```
java.sql.SQLException
```

insertRow

Inserts the contents of the insert row into the result set and the database.

```
public void insertRow()
```

Throws

```
java.sql.SQLException
```

updateRow

Updates the underlying database with the new contents of the current row.

```
public void updateRow()
```

Throws

```
java.sql.SQLException
```

deleteRow

Deletes the current row from the result set and the underlying database.

```
public void deleteRow()
```

Throws

```
java.sql.SQLException
```

5.4 com.stc.eways.jdbcx.SqlStatementAgent Class

```
java.lang.Object
|
+-- com.stc.eways.jdbcx.StatementAgent
|
+-- com.stc.eways.jdbcx.SqlStatementAgent
```

All Implemented Interfaces

ResetEventListener, SessionEventListener

```
public class SqlStatementAgent
    extends StatementAgent
```

SQLStatement Agent that hosts a managed Statement object.

Constructors of the SqlStatementAgent

```
SqlStatementAgent
```

```
SqlStatementAgent
```

Methods of the SqlStatementAgent

[addBatch](#) on page 106

[executeQuery](#) on page 105

[execute](#) on page 105

[executeUpdate](#) on page 105

Constructor SqlStatementAgent

Creates new SQLStatementAgent with scroll direction TYPE_FORWARD_ONLY and concurrency CONCUR_READ_ONLY.

```
public SqlStatementAgent(Session session)
```

Name	Description
session	Connection session.

Constructor SqlStatementAgent

Creates a new SQLStatementAgent.

```
public SqlStatementAgent(Session session, int iScroll, int iConcur)
```

Name	Description
session	Connection session.
iScroll	Scroll direction: TYPE_FORWARD_ONLY, TYPE_SCROLL_INSENSITIVE.
iConcur	Concurrency: CONCUR_READ_ONLY, CONCUR_UPDATABLE.

execute

Executes the specified SQL statement.

```
public boolean execute(java.lang.String sSql)
```

Name	Description
sSql	SQL statement.

Returns

true if the first result is a ResultSetAgent or false if it is an integer.

Throws

```
java.sql.SQLException
```

executeQuery

Executes the specified SQL query and returns a ResultSetAgent that contains the generated result set.

```
public ResultSetAgent executeQuery(java.lang.String sSql)
```

Name	Description
sSql	SQL statement.

Returns

A ResultSetAgent or null

Throws

```
java.sql.SQLException
```

executeUpdate

Executes the specified SQL statement and returns the number of rows that were affected.

```
public int executeUpdate(java.lang.String sSql)
```

Name	Description
sSql	SQL statement.

Returns

The number of rows affected by the update operation; 0 if no rows were affected.

Throws

java.sql.SQLException

addBatch

Adds the specified SQL statement to the list of commands to be sent as a batch.

```
public void addBatch(java.lang.String sSql)
```

Name	Description
sSql	SQL statement.

Throws

java.sql.SQLException

5.5 com.stc.eways.jdbcx.CallableStatementAgent Class

```
java.lang.Object
|
+-- com.stc.eways.jdbcx.StatementAgent
|
+-- com.stc.eways.jdbcx.PreparedStatementAgent
|
+-- com.stc.eways.jdbcx.CallableStatementAgent
```

All Implemented Interfaces

ResetEventListener, SessionEventListener

Direct Known Subclasses

StoredProcedureAgent

```
public abstract class CallableStatementAgent
```

extends PreparedStatementAgent

Agent hosts CallableStatement interface

Constructors of the CallableStatementAgent

CallableStatementAgent

CallableStatementAgent

CallableStatementAgent

Methods of the CallableStatementAgent

[getArray](#) on page 116

[getBlob](#) on page 117

[getByte](#) on page 111

[getBlob](#) on page 117

[getDate](#) on page 114

[getFloat](#) on page 112

[getLong](#) on page 112

[getObject](#) on page 110

[getShort](#) on page 111

[getTime](#) on page 114

[getTimestamp](#) on page 115

[registerOutParameter](#) on page 109

[sessionOpen](#) on page 108

[getBigDecimal](#) on page 113

[getBoolean](#) on page 111

[getBytes](#) on page 116

[getDate](#) on page 113

[getDouble](#) on page 113

[getInt](#) on page 112

[getObject](#) on page 110

[getRef](#) on page 117

[getString](#) on page 116

[getTimestamp](#) on page 115

[registerOutParameter](#) on page 108

[registerOutParameter](#) on page 109

[wasNull](#) on page 110

Constructor CallableStatementAgent

Creates new CallableStatementAgent with scroll direction TYPE_FORWARD_ONLY and concurrency CONCUR_READ_ONLY.

```
public CallableStatementAgent(Session session, java.lang.String  
sCommand)
```

Name	Description
session	Connection session.
sCommand	The Call statement used to invoke a stored procedure.

Constructor CallableStatementAgent

Creates a new CallableStatementAgent.

```
public CallableStatementAgent(Session session, int iScroll, int
iConcur)
```

Name	Description
session	Connection session.
iScroll	Ignored.
iConcur	Ignored

Constructor CallableStatement Agent

Creates a new CallableStatementAgent.

```
public CallableStatementAgent(Session session, java.lang.String
sCommand, int iScroll, int iConcur)
```

Name	Description
session	Connection session.
sCommand	The Call statement used to invoke a stored procedure.
iScroll	Scroll direction: TYPE_FORWARD_ONLY,
iConcur	Concurrency: CONCUR_READ_ONLY, CONCUR_UPDATEABLE

sessionOpen

Opens the session event handler.

```
public void sessionOpen(SessionEvent evt)
```

Overrides

sessionOpen in class PreparedStatementAgent

Name	Description
evt	Session event.

registerOutParameter

Registers the indexed OUT parameter with specified type.

```
public void registerOutParameter(int index, int iType)
```

Name	Description
index	Parameter index starting from 1.
iType	A JDBC type defined by inava.sql.Types.

Throws

java.sql.SQLException

registerOutParameter

Registers the indexed OUT parameter with specified type and scale.

```
public void registerOutParameter(int index, int iType, int iScale)
```

Name	Description
index	Parameter index starting from 1.
iType	A JDBC type defined by inava.sql.Types.
iScale	The number of digits to the right of the decimal point. Only applied to DECIMAL and NUMERIC types.

Throws

java.sql.SQLException

registerOutParameter

Registers the indexed OUT parameter with specified user-named type or REF type.

```
public void registerOutParameter(int index, int iType,
                                java.lang.String sType)
```

Name	Description
index	Parameter index starting from 1.
iType	A JDBC type defined by inava.sql.Types.
tName	The fully-qualified name of the parameter being set. It is intended to be used by REF, STRUCT, DISTINCT, or JAVA_OBJECT.

Throws

java.sql.SQLException

wasNull

Returns whether or not the last OUT parameter read had the SQL NULL value.

```
public boolean wasNull()
```

Returns

true if the parameter read is SQL NULL; otherwise, false

Throws

```
java.sql.SQLException
```

getObject

Gets the value of the indexed parameter as an instance of Object.

```
public java.lang.Object getObject(int index)
```

Name	Description
index	Parameter index starting from 1.

Returns

The Object value

Throws

```
java.sql.SQLException
```

getObject

Gets the value of the indexed parameter as an instance of Object and uses map for the customer mapping of the parameter value.

```
public java.lang.Object getObject(int index, java.util.Map map)
```

Name	Description
index	Parameter index starting from 1.
map	A Map object for mapping from SQL type names for user-defined types to classes in the Java programming language.

Returns

An Object value

Throws

```
java.sql.SQLException
```

getBoolean

Gets the boolean value of the indexed parameter.

```
public boolean getBoolean(int index)
```

Name	Description
index	Parameter index starting from 1.

Returns

A boolean value

Throws

```
java.sql.SQLException
```

getByte

Gets byte value of the indexed parameter.

```
public byte getByte(int index)
```

Name	Description
index	Parameter index starting from 1.

Returns

A byte value

Throws

```
java.sql.SQLException
```

getShort

Gets short value of the indexed parameter.

```
public short getShort(int index)
```

Returns

A short value

Throws

```
java.sql.SQLException
```

getInt

Gets integer value of the indexed parameter.

```
public int getInt(int index)
```

Name	Description
index	Parameter index starting from 1.

Returns

A int value

Throws

java.sql.SQLException

getLong

Gets long value of the indexed parameter.

```
public long getLong(int index)
```

Name	Description
index	Parameter index starting from 1.

Returns

A long value

Throws

java.sql.SQLException

getFloat

Gets float value of the indexed parameter.

```
public float getFloat(int index)
```

Name	Description
index	Parameter index starting from 1.

Returns

A float value

Throws

java.sql.SQLException

getDouble

Gets double value of the indexed parameter.

```
public double getDouble(int index)
```

Name	Description
index	Parameter index starting from 1.

Returns

A float value

Throws

java.sql.SQLException

getBigDecimal

Gets decimal value of the indexed parameter.

```
public java.math.BigDecimal getBigDecimal(int index)
```

Name	Description
index	Parameter index starting from 1.

Returns

A BigDecimal object

Throws

java.sql.SQLException

getDate

Gets date value of the indexed parameter.

```
public java.sql.Date getDate(int index)
```

Name	Description
index	Parameter index starting from 1.

Returns

A Date object

Throws

java.sql.SQLException

getDate

Gets date value of the indexed parameter with time zone from calendar.

```
public java.sql.Date getDate(int index, java.util.Calendar calendar)
```

Name	Description
index	Parameter index starting from 1.
cal	The Calendar object used to construct the timestamp.

Returns

A Date object

Throws

java.sql.SQLException

getTime

Gets time value of the indexed parameter.

```
public java.sql.Time getTime(int index)
```

Name	Description
index	Parameter index starting from 1.

Returns

A Time object

Throws

java.sql.SQLException

getTime

Gets time value of the indexed parameter with time zone from calendar.

```
public java.sql.Time getTime(int index, java.util.Calendar calendar)
```

Name	Description
index	Parameter index starting from 1.
cal	The Calendar object used to construct the timestamp.

Returns

A Time object

Throws

java.sql.SQLException

getTimestamp

Gets timestamp value of the indexed parameter.

```
public java.sql.timestamp getTimestamp(int index)
```

Name	Description
index	Parameter index starting from 1.

Returns

A Timestamp object

Throws

java.sql.SQLException

getTimestamp

Gets timestamp value of the indexed parameter.

```
public java.sql.timestamp getTimestamp(int index, java.util.Calendar  
calendar)
```

Name	Description
index	Parameter index starting from 1.
cal	The Calendar object used to construct the timestamp.

Returns

A Timestamp object

Throws

`java.sql.SQLException`

getString

Gets string value of the indexed parameter.

```
public java.lang.String getString(int index)
```

Name	Description
index	Parameter index starting from 1.

Returns

A String object

Throws

`java.sql.SQLException`

getBytes

Gets byte array value of the indexed parameter.

```
public byte[] getBytes(int index)
```

Name	Description
index	Parameter index starting from 1.

Returns

An array of bytes

Throws

`java.sql.SQLException`

getArray

Gets Array value of the indexed parameter.

```
public java.sql.Array getArray(int index)
```

Name	Description
index	Parameter index starting from 1.

Returns

An Array object

Throws

java.sql.SQLException

getBlob

Gets Blob value of the indexed parameter.

```
public java.sql.Blob getBlob(int index)
```

Name	Description
index	Parameter index starting from 1.

Returns

A Blob object

Throws

java.sql.SQLException

getBlob

Gets Blob value of the indexed parameter.

```
public java.sql.Blob getBlob(int index)
```

Name	Description
index	Parameter index starting from 1.

Returns

A Blob object

Throws

java.sql.SQLException

getRef

Gets Ref value of the indexed parameter.

```
public java.sql.Ref getRef(int index)
```

Name	Description
index	Parameter index starting from 1.

Returns

A Ref object

Throws

java.sql.SQLException

5.6 com.stc.eways.jdbcx.TableResultSet Class

```
java.lang.Object
|
+-- com.stc.eways.jdbcx.StatementAgent
|
+-- com.stc.eways.jdbcx.TableResultSet
```

All Implemented Interfaces

```
ResetEventListener, SessionEventListener
public abstract class TableResultSet
extends StatementAgent
ResultSet to map selected records of table in the database
```

Methods of the TableResultSet

[absolute](#) on page 120
[beforeFirst](#) on page 121
[deleteRow](#) on page 124
[first](#) on page 120
[getAsciiStream](#) on page 123
[getBinaryStream](#) on page 123
[getCharacterStream](#) on page 124
[isAfterLast](#) on page 122
[isFirst](#) on page 121
[last](#) on page 121
[moveToInsertRow](#) on page 124

[afterLast](#) on page 122
[cancelRowUpdates](#) on page 125
[findColumn](#) on page 122
[getAsciiStream](#) on page 123
[getBinaryStream](#) on page 123
[getCharacterStream](#) on page 123
[insertRow](#) on page 124
[isBeforeFirst](#) on page 122
[isLast](#) on page 121
[moveToCurrentRow](#) on page 125
[next](#) on page 119

[previous](#) on page 119
[rowDeleted](#) on page 125
[rowUpdated](#) on page 125
[updateRow](#) on page 124

[relative](#) on page 120
[rowInserted](#) on page 125
[select](#) on page 119
[wasNull](#) on page 126

select

Select table records.

```
public void select(java.lang.String sWhere)
```

Name	Description
sWhere	Where condition for the query.

Throws

[java.sql.SQLException](#)

next

Navigate one row forward.

```
public boolean next()
```

Returns

true if the move to the next row is successful; otherwise, false.

Throws

[java.sql.SQLException](#)

previous

Navigate one row backward. It should be called only on ResultSetAgent objects that are TYPE_FORWARD_ONLY.

```
public boolean previous()
```

Returns

true if the cursor successfully moves to the previous row; otherwise, false.

Throws

[java.sql.SQLException](#)

absolute

Move cursor to specified row number. It should be called only on ResultSetAgent objects that are TYPE_FORWARD_ONLY.

Name	Description
row	An integer other than 0.

Returns

true if the cursor successfully moves to the specified row; otherwise, false.

Throws

java.sql.SQLException

relative

Move the cursor forward or backward a specified number of rows. It should be called only on ResultSetAgent objects that are TYPE_FORWARD_ONLY.

```
public boolean relative(int rows)
```

Name	Description
rows	The number of rows to move the cursor, starting at the current row. If the rows are positive, the cursor moves forward; if the rows are negative, the cursor moves backwards.

Returns

true if the cursor successfully moves to the number of rows specified; otherwise, false.

Throws

java.sql.SQLException

first

Move the cursor to the first row of the result set. It should be called only on ResultSetAgent objects that are TYPE_FORWARD_ONLY.

```
public boolean first()
```

Returns

true if the cursor successfully moves to the first row; otherwise, false.

Throws

java.sql.SQLException

isFirst

Check if the cursor is on the first row. It should be called only on ResultSetAgent objects that are TYPE_FORWARD_ONLY.

```
public boolean isFirst()
```

Returns

true if the cursor successfully moves to the first row; otherwise, false.

Throws

java.sql.SQLException

last

Move to the last row of the result set. It should be called only on ResultSetAgent objects that are TYPE_FORWARD_ONLY.

```
public boolean last()
```

Returns

true if the cursor successfully moves to the last row; otherwise, false.

Throws

java.sql.SQLException

isLast

Check if the cursor is positioned on the last row. It should be called only on ResultSetAgent objects that are TYPE_FORWARD_ONLY.

```
public boolean isLast()
```

Returns

true if the cursor is on the last row; otherwise, false

Throws

java.sql.SQLException

beforeFirst

Move the cursor before the first row. It should be called only on ResultSetAgent objects that are TYPE_FORWARD_ONLY.

```
public void beforeFirst()
```

Throws

java.sql.SQLException

isBeforeFirst

Check if the cursor is positioned before the first row. It should be called only on ResultSetAgent objects that are TYPE_FORWARD_ONLY.

```
public boolean isBeforeFirst()
```

Returns

true if the cursor successfully moves before the first row; otherwise, false

Throws

java.sql.SQLException

afterLast

Move the cursor after the last row. It should be called only on ResultSetAgent objects that are TYPE_FORWARD_ONLY.

```
public void afterLast()
```

Returns

java.sql.SQLException

isAfterLast

Returns true if the cursor is positioned after the last row. It should be called only on ResultSetAgent objects that are TYPE_FORWARD_ONLY.

```
public boolean isAfterLast()
```

Returns true if the cursor successfully moves after the last row; otherwise, false.

Throws

java.sql.SQLException

findColumn

Finds the index of the named column.

```
public int findColumn(java.lang.String index)
```

Throws

java.sql.SQLException

getAsciiStream

Returns the column data as an AsciiStream.

```
public java.io.InputStream getAsciiStream(int index)
```

Throws

java.sql.SQLException

getAsciiStream

Returns the column data as an AsciiStream.

```
public java.io.InputStream getAsciiStream(java.lang.String  
columnName)
```

Throws

java.sql.SQLException

getBinaryStream

Returns the column data as BinaryStream.

```
public java.io.InputStream getBinaryStream(int index)
```

Throws

java.sql.SQLException

getBinaryStream

Returns the column data as BinaryStream.

```
public java.io.InputStream getBinaryStream(java.lang.String  
columnName)
```

Throws

java.sql.SQLException

getCharacterStream

Returns the column data as CharacterStream.

```
public java.io.Reader getCharacterStream(int index)
```

Throws

java.sql.SQLException

getCharacterStream

Returns the column data as CharacterStream.

```
public java.io.Reader getCharacterStream(java.lang.String columnName)
```

Throws

java.sql.SQLException

refreshRow

Refreshes the current row with its most recent value from the database.

```
public void refreshRow()
```

Throws

java.sql.SQLException

insertRow

Inserts the contents of the current row into the database.

```
public void insertRow()
```

Throws

java.sql.SQLException

updateRow

Updates the contents of the current row into the database.

```
public void updateRow()
```

Throws

java.sql.SQLException

deleteRow

Deletes the contents of the current row from the database.

```
public void deleteRow()
```

Throws

java.sql.SQLException

moveToInsertRow

Moves the current position to a new insert row.

```
public void moveToInsertRow()
```

Throws

java.sql.SQLException

moveToCurrentRow

Moves the current position to the current row. It is used after you insert a row.

```
public void moveToCurrentRow()
```

Throws

java.sql.SQLException

cancelRowUpdates

Cancels any updates made to this row.

```
public void cancelRowUpdates()
```

Throws

java.sql.SQLException

rowInserted

Returns true if the current row has been inserted.

```
public boolean rowInserted()
```

Throws

java.sql.SQLException

rowUpdated

Returns true if the current row has been updated.

```
public boolean rowUpdated()
```

Throws

java.sql.SQLException

rowDeleted

Returns true if the current row has been deleted.

```
public boolean rowDeleted()
```

Throws

java.sql.SQLException

wasNull

Returns true if the last data retrieved is NULL.

```
public boolean wasNull()
```

Throws

```
java.sql.SQLException
```

Index

B

Batch Operations 39

C

class parameter

 Connector settings 17

 Data Source settings 15

Collaboration Service Java 21–22

Collecting Data from Output Parameters 35

component relationship 22

components, Java-enabled 22

configuration file sections

 Connector settings 17

 DataSource settings 15–16

configuration parameters

 class 15, 17

 DatabaseName 16

 password 16

 PortNumber 16

 ServerName 16

 type 17

 user name 16

configuration steps, schema 41

configuring e*Way connections 14–17

connection establishment mode 18

connection inactivity timeout 18

Connection Manager 19

connection types, JDBC 17

connection verification interval 18

connector objects, JDBC 17

Connector settings 17

creating e*Way connections 14

D

Database Configuration Node 40

DatabaseName parameter 16

DataSource settings 15–16

db.ctl 13

DBWizard 23

driver class, JDBC 15

E

e*Way connections

 configuring 14–17

 creating 14

executeBusinessRules() 22

G

getMoreResults 36

getResultSet 36

getUpdateCount 36

H

host system requirements 10

I

implementation, sample 40–55

J

Java Collaboration Service 21–22

Java ETD Builder 22–23

Java-enabled components 22

jconn2.jar 13, 46

JDBC 23

 connection types 17

 connector objects 17

 driver class 15

jdbc2_0-stdext.jar 13

M

Mixing XA-Compliant and XA-Noncompliant
e*Way Connections 17

P

password parameter 16

PortNumber parameter 16

Prepared Statement 37

R

requirements

 host system 10

 system 9

Returning Result Sets from Sybase, DB2, and SQL

Server 36

S

sample schema 40–55
scenario, sample 40–55
schema configuration steps 41
Server Name parameter 16
stcewjdbcx.ctl 13
stcjdbcx.jar 8, 13, 46
stcjdbcx.zip 13
sybase.def 13
system requirements 9

T

Tables 31
The delete() Method 34
The insert() Method 32
The select() Method 32
The Stored Procedure 34
The update() Method 33
timeout 16
transaction mode 17
type parameter 17

U

UNIX 12
user name parameter 16
userInitialize() 22
userTerminate() 22

W

Windows NT / Windows 2000 8, 9, 11