

SeeBeyond ICAN Suite

Cobol Copybook Converter User's Guide

Release 5.0



The information contained in this document is subject to change and is updated periodically to reflect changes to the applicable software. Although every effort has been made to ensure the accuracy of this document, SeeBeyond Technology Corporation (SeeBeyond) assumes no responsibility for any errors that may appear herein. The software described in this document is furnished under a License Agreement and may be used or copied only in accordance with the terms of such License Agreement. Printing, copying, or reproducing this document in any fashion is prohibited except in accordance with the License Agreement. The contents of this document are designated as being confidential and proprietary; are considered to be trade secrets of SeeBeyond; and may be used only in accordance with the License Agreement, as protected and enforceable by law. SeeBeyond assumes no responsibility for the use or reliability of its software on platforms that are not supported by SeeBeyond.

SeeBeyond, e*Gate, and e*Way are the registered trademarks of SeeBeyond Technology Corporation in the United States and select foreign countries; the SeeBeyond logo, e*Insight, and e*Xchange are trademarks of SeeBeyond Technology Corporation. The absence of a trademark from this list does not constitute a waiver of SeeBeyond Technology Corporation's intellectual property rights concerning that trademark. This document may contain references to other company, brand, and product names. These company, brand, and product names are used herein for identification purposes only and may be the trademarks of their respective owners.

© 2003 by SeeBeyond Technology Corporation. All Rights Reserved. This work is protected as an unpublished work under the copyright laws.

This work is confidential and proprietary information of SeeBeyond and must be maintained in strict confidence.

Version 20031014145611.

Contents

Chapter 1

Introduction	5
Contents of This Guide	5
Writing Conventions	6
Additional Conventions	6
Supporting Documents	7
SeeBeyond Web Site	7

Chapter 2

About the Cobol Copybook Converter	8
Introducing the Cobol Copybook Converter	8
New Features For Version 5.0	9
Supported Platforms	9
System Requirements	9
Understanding Cobol Copybook Converter Methods	9
Root-level Methods	10
void unmarshal(OtdInputStream)	10
void unmarshal(byte[])	10
void unmarshalFromString(String)	10
void marshal(OtdOutputStream)	11
byte[] marshal()	11
String marshalToString	11
Non-Root Methods	12

Chapter 3

Installing the Cobol Copybook Converter	14
Installing the Cobol Copybook Converter	14

Chapter 4

Using the Cobol Copybook Converter 15

Converting Files with COBOL Copybooks 15

 Creating a COBOL Copybook Project and OTD 15

 Creating the Connectivity Map 17

 Creating the Collaboration Definition 17

 Creating the Business Logic for The Collaboration Definition 19

 Unmarshaling the Input Formats 19

 Specifying Destinations 22

 Writing The Output to a File 24

 Binding the Collaboration Definition and eWays 24

Working with The Cobol Copybook Converter Sample 25

 Importing the Sample Project 25

Index 27

Introduction

This user's guide describes how to use the Cobol Copybook Converter to convert input data to COBOL copybook specifications.

In This Chapter

- [Contents of This Guide](#) on page 5
- [Writing Conventions](#) on page 6
- [Supporting Documents](#) on page 7
- [SeeBeyond Web Site](#) on page 7

1.1 Contents of This Guide

This guide contains the following information:

- [Chapter 2, "About the Cobol Copybook Converter" on page 8](#) provides an overview of the Cobol Copybook Converter.
- [Chapter 3, "Installing the Cobol Copybook Converter" on page 14](#) describes how to install the Cobol Copybook Converter.
- [Chapter 4, "Using the Cobol Copybook Converter" on page 15](#) describes how to use the Cobol Copybook Converter.

1.2 Writing Conventions

The following writing conventions are observed throughout this document.

Table 1 Writing Conventions

Text	Convention	Example
Button, file, icon, parameter, variable, method, menu, and object names.	Bold text	<ul style="list-style-type: none"> ▪ Click OK to save and close. ▪ From the File menu, select Exit. ▪ Select the logicalhost.exe file. ▪ Enter the timeout value. ▪ Use the getClassname() method. ▪ Configure the Inbound File eWay.
Command line arguments and code samples	Fixed font. Variables are shown in <i>bold italic</i> .	<code>bootstrap -p <i>password</i></code>
Hypertext links	Blue text	For more information, see "Writing Conventions" on page 6.

Additional Conventions

Windows Systems

For the purposes of this guide, references to "Windows" will apply to Microsoft Windows Server 2003, Windows XP, and Windows 2000.

Path Name Separator

This guide uses the backslash ("\") as the separator within path names. If you are working on a UNIX system, please make the appropriate substitutions.

1.3 Supporting Documents

The following SeeBeyond documents provide additional information about the ICAN Suite:

- *SeeBeyond Integrated Composite Application Network Suite Primer*
- *eGate Installation Guide*
- *eGate Integrator User's Guide*
- *eGate Integrator Tutorial*
- *SeeBeyond ICAN Suite Deployment Guide*

1.4 SeeBeyond Web Site

The SeeBeyond Web site is a useful source for product news and technical support information at www.seebeyond.com.

About the Cobol Copybook Converter

This chapter provides an overview of the Cobol Copybook Converter and includes the following sections:

In This Chapter

- [Introducing the Cobol Copybook Converter](#) on page 8
- [Supported Platforms](#) on page 9
- [System Requirements](#) on page 9
- [Understanding Cobol Copybook Converter Methods](#) on page 9

2.1 Introducing the Cobol Copybook Converter

The Cobol Copybook Converter converts copybook descriptions, and creates OTDs designed to encapsulate data conforming to the description. The generated OTD is a model; a user-friendly abstraction of the data it contains. Cobol Copybook Converter OTDs enable you to handle the data, which is COBOL/EBCDIC in form, as objects of the Java programming language.

The Cobol Copybook Converter presents the copybook specification to the Cobol Copybook Converter in a flat file. The converter feature uses the 01 segment of the Cobol copybook as the root node of the OTD.

For example, if you are using a CICS eWay, after you have generated an OTD file, the eGate Project can populate the file and present it into the COMM AREA for CICS calls. Similarly, the system can parse the output COMM AREA from CICS into OTDs created by the Cobol Copybook Converter.

Note: *The Cobol Copybook Converter must have valid COBOL syntax to complete an accurate conversion. The Cobol Copybook Converter performs limited syntax validation on an input copybook. To ensure a functional OTD conversion, verify that the copybook supplied to the converter is well-formed **and** valid.*

Unsupported Features

The following Cobol Copybook features are not supported by the Cobol Copybook Converter:

- **Cobol Copy Statements** – Cobol copy statements that are imbedded within the Cobol Copybook are not supported.
- **Usage Pointer** – Usage pointer statements are not supported. To accommodate these elements, you must change the statement to **PIC X(4)**. The Cobol Copybook Converter will interpret this and create a node of the correct length with the subsequent nodes as siblings instead of child nodes.

2.1.1. New Features For Version 5.0

The following are new features for the Cobol Copybook Converter in this release:

- Ability to handle OCCURS DEPENDS clause
- Ability to handle REDEFINES clause
- Ability to handle USAGE clause
- Ability to convert COBOL types to Java types
- Copybooks with multiple level 01 entries are not supported
- Numeric-edited and alphanumeric-edited items are treated as alphanumeric items
- Level 88 entries are ignored

2.2 Supported Platforms

The Cobol Copybook Converter is available for the following platform:

- Windows 2000 SP3

2.3 System Requirements

The system requirements for the Cobol Copybook Converter are the same as for eGate Integrator. For information, refer to the *eGate Integrator Installation Guide*.

The system where Cobol Copybook Converter is installed needs approximately 20 MB of free disk space for the application and its configuration, library, and script files.

2.4 Understanding Cobol Copybook Converter Methods

The Object Type Definitions (OTDs) created by the Cobol Copybook Converter provide the following methods which you can use to extract or insert content into OTDs.

2.4.1. Root-level Methods

The following methods are the root-level methods provided.

- void unmarshal(OtdInputStream)
- void unmarshal(byte[])
- void unmarshalFromString(String)
- void marshal(OtdOutputStream)
- byte[] marshal()
- String marshalToString()

void unmarshal(OtdInputStream)

This method populates the OTD using the supplied OtdInputStream object as the data source. The supplied object must be an opened stream with available data. `com.stc.otd.runtime.UnmarshalException` is thrown if the data obtained from the stream is not compatible with the OTD, and `java.io.IOException` is thrown if any other input error occurs in attempting to read data from the stream object. The stream object should flow EBCDIC data (that is, bytes defined in the EBCDIC set).

Syntax

```
void unmarshal(OtdInputStream)
```

Throws

`UnmarshalException`, `IOException`

void unmarshal(byte[])

This method functions identically to the previous unmarshal method, with the only difference that this method accepts input data as an array of bytes. The input array must contain EBCDIC data.

Syntax

```
void unmarshal(byte[])
```

Throws

`UnmarshalException`, `IOException`

void unmarshalFromString(String)

This method functions identically to the previous unmarshal method, with the difference that this method accepts input data as a `String`. The input object is converted to a byte sequence by invoking the object's `getBytes()` method. Because `Strings` are Unicode data, it is expected that this method's use is limited, because the Cobol Copybook OTDs expect EBCDIC data. Use this method only to deserialize Unicode sequences that have equivalence in the EBCDIC byte set.

Syntax

```
void unmarshalFromString(String)
```

Throws

UnmarshalException, IOException

void marshal(OtdOutputStream)

This method serializes the content of the OTD and writes it to the supplied output stream object. The output is EBCDIC data. java.io.IOException is thrown if an output error occurs in attempting to write data to the stream object. A MarshalException occurs if the supplied stream object does not use EBCDIC encoding, or some facet of the OTD content prevents correct serialization; for example, an OTD content such as a binary item may possess a value that exceeds the storage capacity of 8 bytes specified for binary items.

Syntax

```
void marshal(OtdOutputStream)
```

Throws

MarshalException, IOException

byte[] marshal()

This method functions identically to the previous marshal method, except that the OTD content is returned as an array of bytes. The content output is EBCDIC data.

Syntax

```
byte[] marshal()
```

Throws

MarshalException, IOException

String marshalToString

This method functions identically to the previous marshal method, except that the OTD content is returned as a String. The returned String is constructed by marshaling the OTD's (EBCDIC) contents into a ByteArrayOutputStream, and then translating the bytes into characters by invoking the toString method of the stream, which translates the bytes into characters according to the platform's default character encoding. This method performs no pretransform verification that the OTD's contents can be mapped to Unicode.

Syntax

```
String marshalToString()
```

Throws

MarshalException, IOException

2.4.2. Non-Root Methods

Every leaf node in a Cobol Copybook OTD represents an elementary item in the Copybook source. For every given leaf node, the OTD provides “getter” and “setter” methods of which the return type and input types depend on the data type and usage type specified in the copybook for the elementary item to which the node corresponds.

For a given non-repeating leaf node named Datum, the following method forms are provided, where *T* is determined from the follow table.

- *T* getDatum()
- void setDatum(*T*)

Usage Types	Display	COMP or COMP-4	COMP-1	COMP-2	COMP-3	COMP-5	INDEX
Data Types							
Alphabetic For example: PIC AAA	String						
Alphanumeric For example: PIC X9	String		String	String			
Alphanumeric edited For example: PIC XB9	String						
Numeric edited For example: PIC ZZZ99	String						
DBCS For example PIC GGBGG	byte[]						
External floating point For example: PIC +9V99E+99	BigDecimal						
Numeric integer (9 digits or less)	int	int			int		int
Numeric floating point (COMP-1 or COMP-2 items)	BigDecimal						
Numeric Integer (10 to 18 digits)	long	long			long	long	

Usage Types	Display	COMP or COMP-4	COMP-1	COMP-2	COMP-3	COMP-5	INDEX
Data Types							
Numeric integer (19 digits or more)	BigDecimal	BigDecimal			BigDecimal	BigDeci mal	

For repeating leaf nodes, these two alternative methods are provided:

- *T* getDatum(int *i*)
- void setDatum(int *i*, *T*)

where *i* is expected to be a value from 0 representing the ordinal of the desired repetition instance; and where *T* is determined as previously described.

Installing the Cobol Copybook Converter

This chapter describes how to install the Cobol Copybook Converter.

In This Chapter

- [“Installing the Cobol Copybook Converter” on page 14](#)

3.1 Installing the Cobol Copybook Converter

During the eGate Integrator installation process, the Enterprise Manager, a web-based application, is used to select and upload products as .sar files from the eGate installation CD-ROM to the Repository.

The installation process includes installing the following components:

- Installing the Repository
- Uploading products to the Repository
- Downloading components (such as Enterprise Designer and Logical Host)
- Viewing product information home pages

Follow the instructions for installing the eGate Integrator in the *eGate Integrator Installation Guide*, and include the following steps:

- 1 During the procedures for uploading files to the eGate Repository using the Enterprise Manager, after uploading the **eGate.sar** file, select and upload the following files:
 - ♦ **CobolCopyBook.sar** (to install the Cobol Copybook Converter)
 - ♦ **FileeWay.sar** (to install the File eWay, used in the sample Project)
- 2 Continue installing the eGate Integrator as instructed in the *eGate Integrator Installation Guide*

Using the Cobol Copybook Converter

This chapter describes how to use the Cobol Copybook Converter to convert COBOL copybooks into OTDs. It also includes how to use the sample that comes with the Cobol Copybook Converter.

In This Chapter

- [Converting Files with COBOL Copybooks](#) on page 15
- [Working with The Cobol Copybook Converter Sample](#) on page 25

4.1 Converting Files with COBOL Copybooks

This section describes how to use the Cobol Copybook Converter to convert files using COBOL copybooks. As a quick start, the following list provide an overview of the steps taken:

- 1 Create an eGate Project if necessary.
- 1 Create a Cobol Object Type Definition (OTD) that indicates to the Collaboration to receive data, use the supplied COBOL copybook file to convert it, and forward the converted data to an output eWay.
- 2 Create a Connectivity Map with an inbound eWay, a Collaboration, and an outbound eWay.
- 3 Creating the Java Collaboration Definition and its business logic.
- 4 Bind the newly created Cobol OTD to the Collaboration and connect the Collaboration to the eWays.
- 5 Configure the eWays if necessary.
- 6 Create an eGate Environment and Deployment Profile.
- 7 Deploy and run the Project.


4.1.1. Creating a COBOL Copybook Project and OTD

To create a COBOL copybook Project and OTD

- 1 In the Project Explorer tab of the Enterprise Designer, right-click the Repository and click **New Project**.


- 2 Right-click the new Project, click New, and click Object Type Definition. The **New Object Type Definition** wizard appears as shown below.

Figure 1 New Object Type Definition Wizard

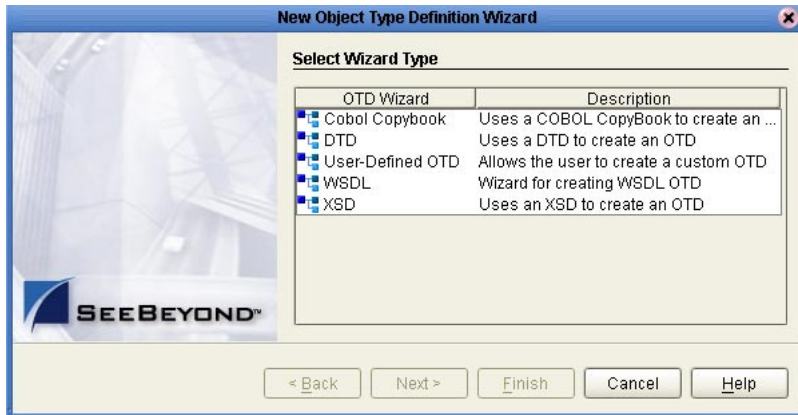

- 3 Click **Cobol Copybook** and click **Next**. The **Select Cobol Copybook Files** page appears.

Figure 2 Selecting COBOL Copybook Files

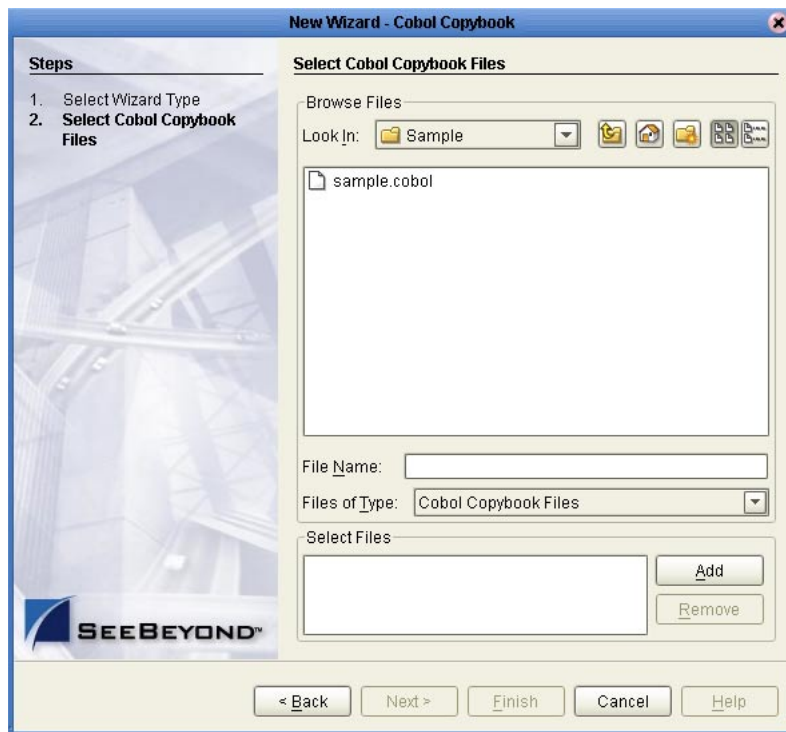

- 4 In the **Look In** box, browse to the location where the COBOL copybook file resides which contains the specifications for this conversion.
- 5 Double-click the file and click **Finish**. The **OTD Editor** window displays the newly created OTD.


4.1.2. Creating the Connectivity Map

The procedure below describes how to create the Connectivity Map for the COBOL copybook conversion Project.

To create the Connectivity Map

- 1 In the Project Explorer tab of the Enterprise Designer, right-click the copybook conversion Project, click **New**, and click **Connectivity Map**. A blank Connectivity Map appears.
- 2 Click the **eWay** icon and click the eWay type.
- 3 Drag the eWay icon to the Connectivity Map to create the inbound eWay.
- 4 Drag the **Service** icon to the Connectivity Map.
- 5 Click the eWay icon and click the eWay type.
- 6 Drag the eWay icon to the Connectivity Map to create the outbound eWay. The Connectivity Map looks similar to the figure below.

Figure 3 COBOL Copybook Conversion Connectivity Map

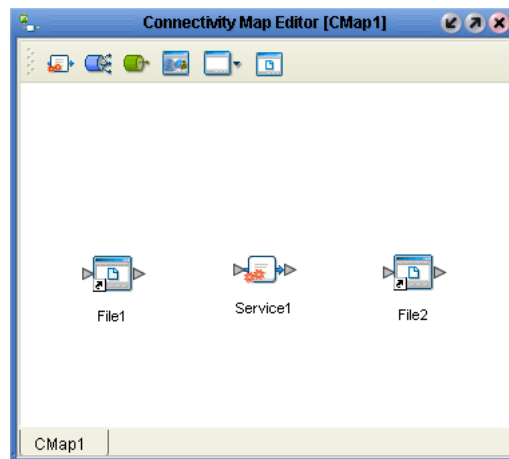


4.1.3. Creating the Collaboration Definition

To create the Collaboration Definition


- 1 In the Project Explorer of the Enterprise Designer, right-click the COBOL copybook conversion Project, click **New** and click **Java Collaboration Definition**. The **Java Collaboration Definition** wizard appears.
- 2 In the **Collaboration Name** box, enter the name for the Collaboration and click **Next**. The **Select Operation** page appears as shown below.

Figure 4 Selecting Collaboration Operations

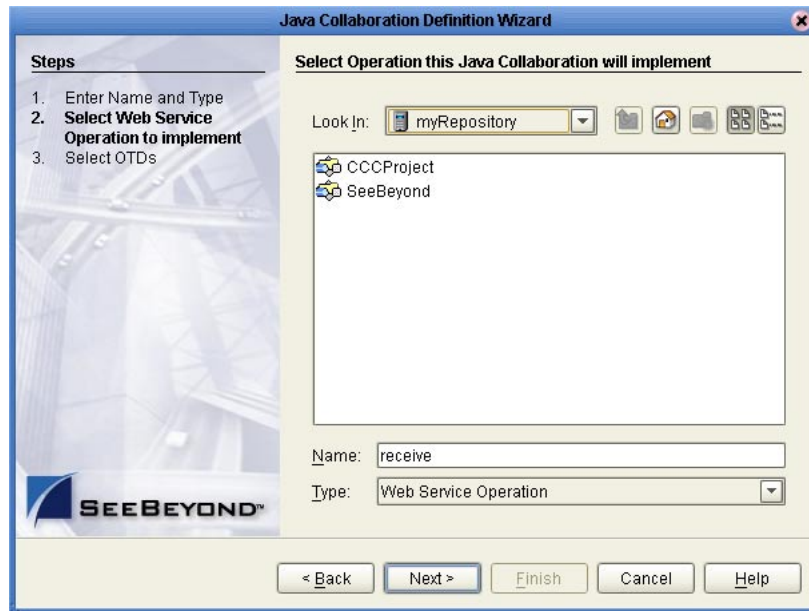

- 3 Double-click **SeeBeyond** and **eWays**—continue to double-click to select the inbound eWay and the (inbound) web service. For example, for the a File eWay, double-click **File**, **FileClient**, and click **receive** as shown below.


Figure 5 Selecting File Receive

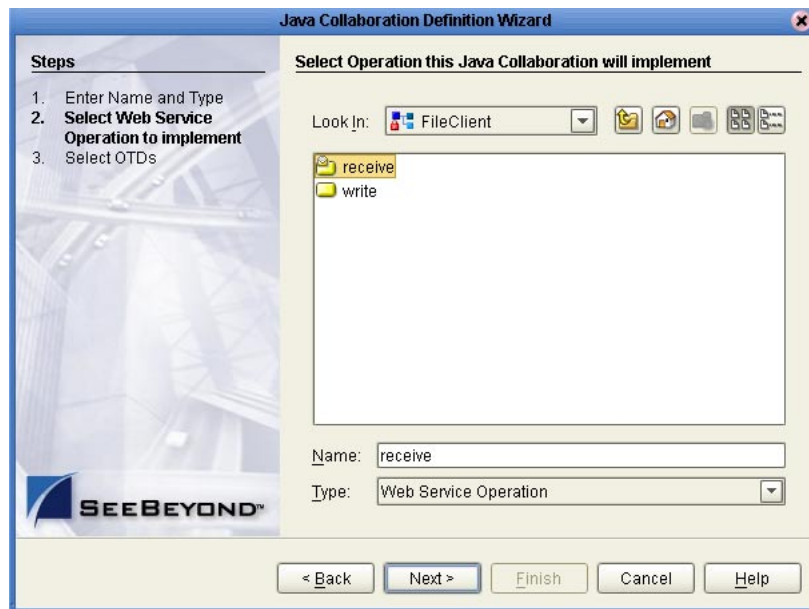

- 4 Click **Next**.
- 5 Double-click **SeeBeyond**, **eWays**—continue to double-click to select the outbound eWay and the (outbound) web service. For example, for the a File eWay, double-click **File**, and then **FileClient**.

- 6 In the **Look In** box, browse to the Project with the copybook file to be used for this conversion.
- 7 Double-click the copybook file. This adds the copybook file as shown below.

Figure 6 Completed Java Collaboration Definition

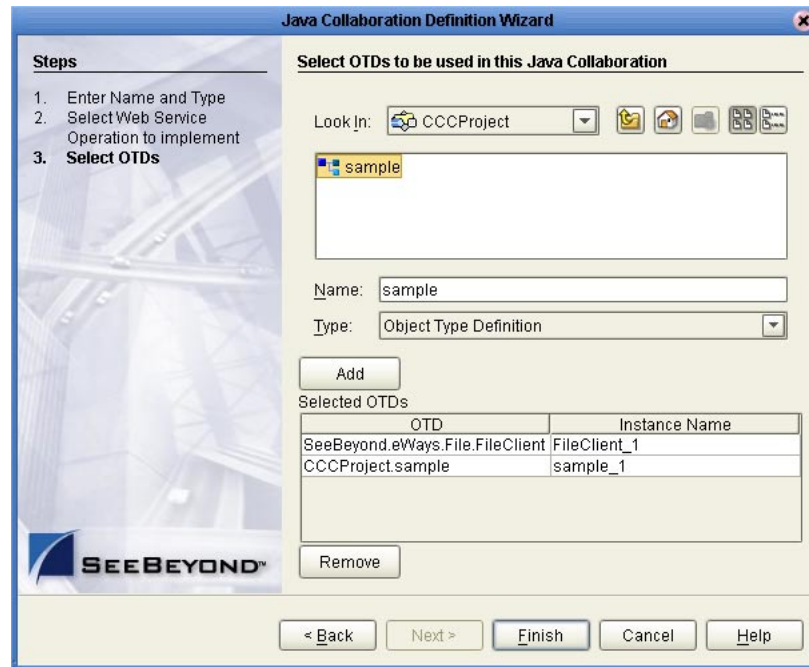

- 8 Click **Finish**. The **Java Collaboration Editor** window appears. You can now create the business logic for the Collaboration as described below.

4.1.4. Creating the Business Logic for The Collaboration Definition

Once you have created the Collaboration Definition as described in the section above, you can create the business logic for the Collaboration. The business logic for a copybook conversion consist of the following components;

- 1 [Unmarshaling the Input Formats](#) on page 19
- 1 [Specifying Destinations](#) on page 22
- 2 [Writing The Output to a File](#) on page 24

Unmarshaling the Input Formats


The first step in the business logic is to handle the data when it comes into the Project. The Cobol Copybook OTD can process text data, and as such, text data can easily be unmarshaled with the `unmarshalFromString method()`.

For other data, you must convert the array data into an array input stream, and then into an OTD input stream.

To unmarshal text input format


- 1 Right-click the copybook OTD and click **Select a method to call**. A list of methods appears.

Figure 7 Cobol Copybook Converter Methods

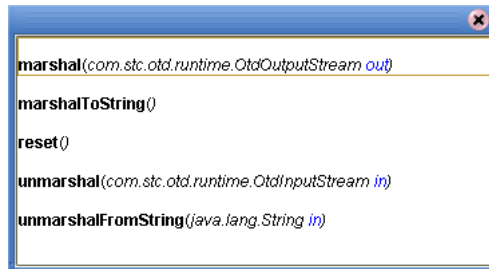

- 2 Click **unmarshalFromString()**. The **unmarshalFromString** box appears.
- 3 Expand the input node and drag **Text** into in (**String**) as shown below.

Figure 8 Unmarshaling Text Input

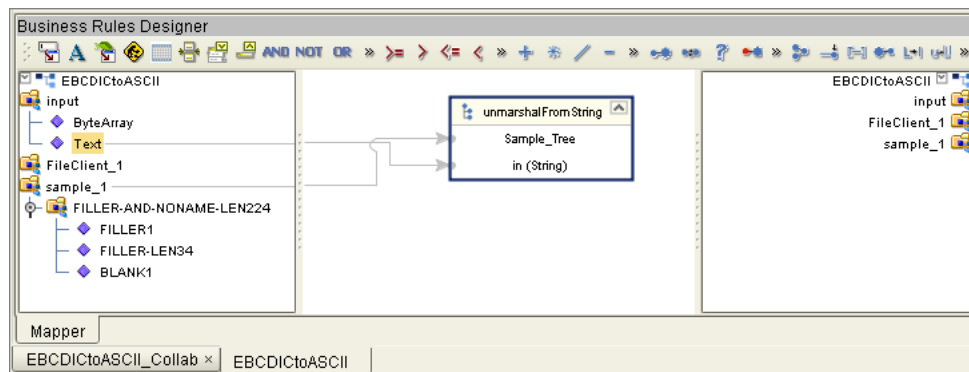

To handle bytes input format


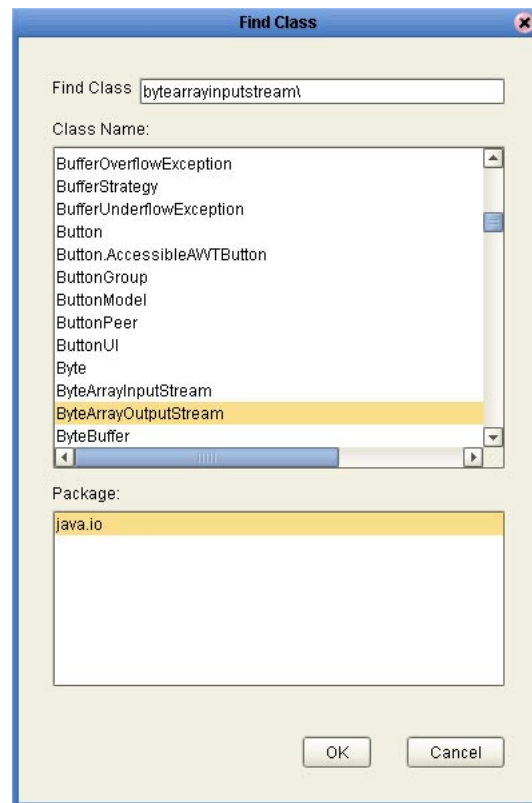
- 1 Click **Local Variable** . The **Create a variable** dialog box appears.
- 2 In the **Variable Name** box, enter the variable name.
- 3 Click **Class** and the ellipsis button. The **Find Class** dialog box appears.
- 4 In the **Find Class** box, type **bytearray** and press **ENTER**. The **Find Class** dialog box shows the package available for the `ByteArrayInputStream` as shown below.

Figure 9 Creating a ByteArrayInputStream Variable




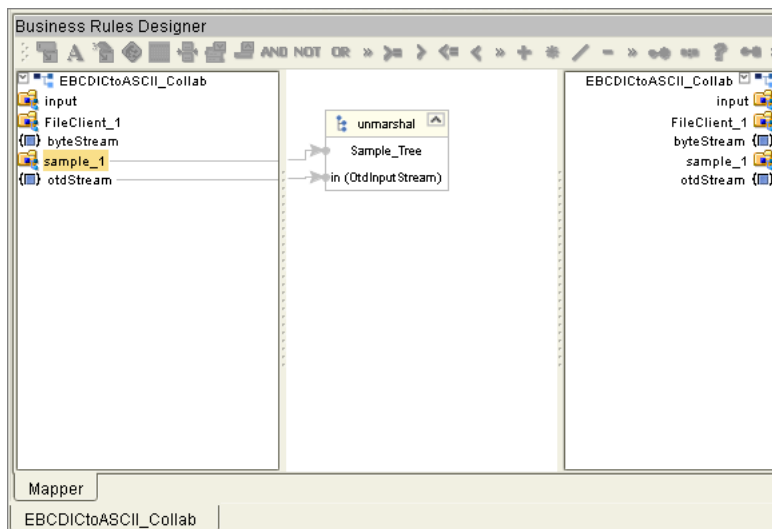
- 5 Click **OK** twice.
- 6 Click **Local Variable** to create the second variable to convert the array input stream to the OTD input stream. The **Create a variable** dialog box appears.
- 7 In the **Variable Name** box, enter the name of the variable, for example, OTDstream.
- 8 In the **Class** box, type:
com.stc.otd.runtime.OtdInputStream
- 9 Click **OK**. This add the following business rule:
com.stc.otd.runtime.OtdInputStream.otdstream;
- 10 Click **Source code mode**  and scroll to the business rule.
- 11 Delete the semi colon at the end of the line.
- 12 Add the following code:
= new com.stc.otd.runtime.provider.SimpleOtdInputStreamImpl(*firstvariable*);
Where *firstvariable* is the variable created in step 6.

Figure 10 Added Variable Code

```
15 {  
16     com.stc.otd.runtime.OtdInputStream otdStream = new com.stc.otd.runtime.provider.SimpleOtdInputStreamImpl( ByteStream );  
17 }
```

- 13 Click **Commit Changes**.
- 14 Right-click the copybook OTD (with the copybook filename) and click **Select a method to call**.
- 15 Click **unmarshal()**. This adds the **unmarshal** box.
- 16 Drag the *firstvariable* created in step 6 to **in (OtdInputStream)** as shown below.

Figure 11 Unmarshaling Non-String Data




Specifying Destinations

You can specify destinations by mapping specific input data to output data, or you can marshal the data to the destination.

To map input and output data

- 1 Expand the input OTD node.
- 2 Drag the input nodes to the output data type under the output service as shown below.


Figure 12 Mapping Input and Output Data

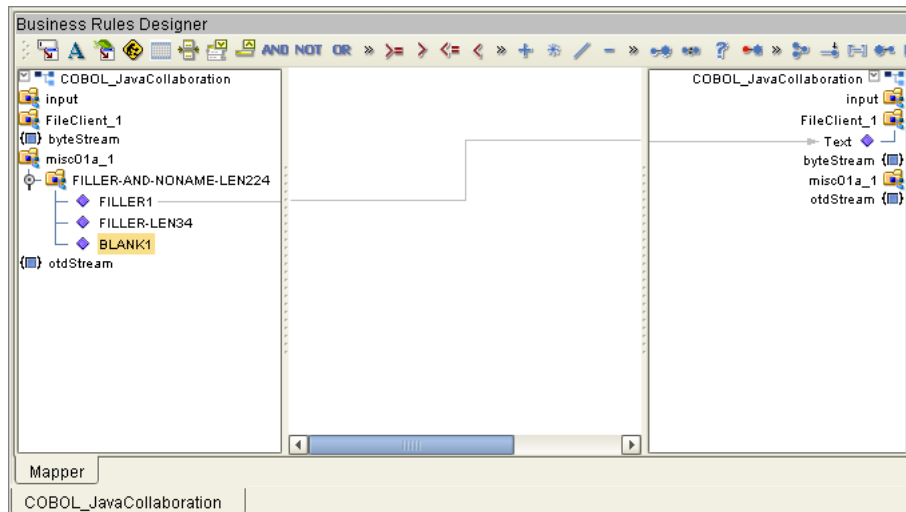

To marshal data as strings to an output destination

- 1 Right-click the copybook OTD, click **Select a method to call**, and click **marshalToString()**. The **marshalToString** box appears.
- 2 Drag **Result (String)** to the output OTD as shown below.

Figure 13 Marshaling Data as String to an Output Destination

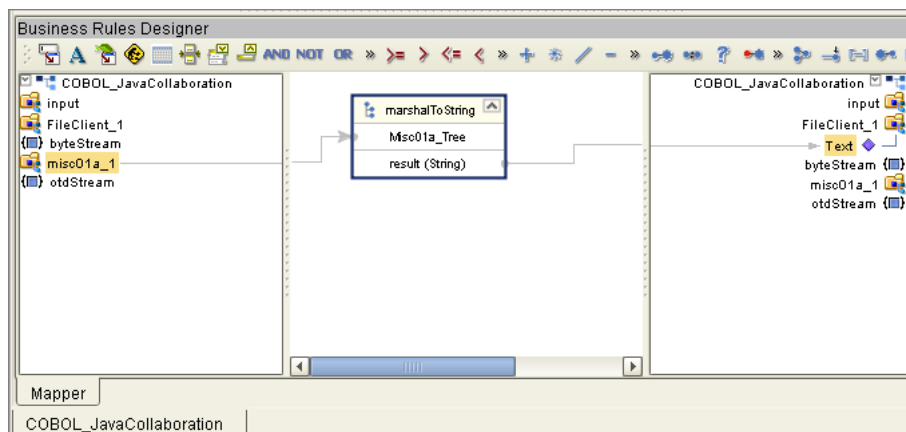

To marshal data to an output destination

- 1 Right-click the copybook OTD, click **Select a method to call**, and click **marshal()**. The **marshal** box appears.
- 2 Drag **Out (OtdOutputStream)** to the appropriate payload node of the output OTD. Verify that the marshal method you selected has a result type compatible with the payload type.

Writing The Output to a File

If you are using a File eWay for the output of the copybook conversion Project, you can use the method below to write the output to a file.

To write the output to a file

- 1 Right-click **FileClient_1** in the input column, click **Select a method to call**, and click **write()**.
- 2 Click **Save**.


4.1.5. Binding the Collaboration Definition and eWays

Once you have created the Collaboration and its business logic as described in the section above, you can bind the new Collaboration Definition to the Service, and then connect the Collaboration to the eWays.

To bind the Collaboration Definition and eWays


- 1 From the Project Explorer of the Enterprise Designer, drag the newly created Collaboration Definition to the Service in the Connectivity Map as shown below.

Figure 14 Binding the Collaboration Definition and Service

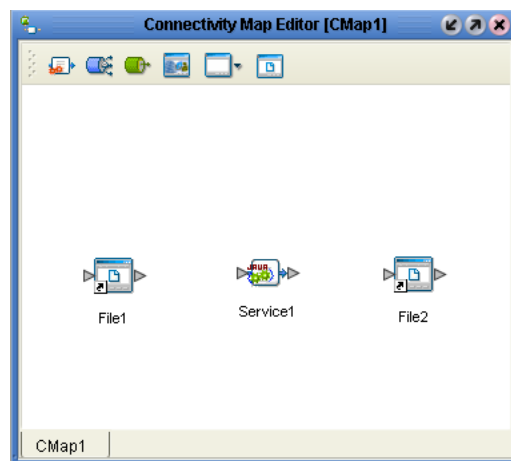

- 2 Double-click the **Service** icon. The **Service1** window appears.
- 3 Drag the input service to the inbound eWay. For example, for a File eWay, the input service is **FileClient input**.
- 4 Drag the output service to the outbound eWay as shown below.

Figure 15 Connecting the Collaboration to the eWays

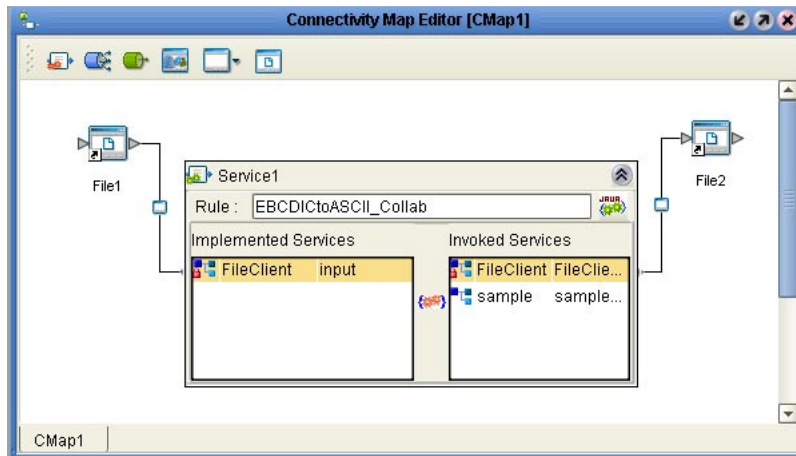

- 5 Close the **Service1** window and click **Save**.

Once you have completed the Connectivity Map binding, you must do the following to finish the Project:

- 1 Configure the eWays as described in the eWay documentation.
- 2 Create an Environment and Deployment Profile and run the Project as described in the *eGate Integrator User's Guide*.

4.2 Working with The Cobol Copybook Converter Sample

Cobol Copybook Converter includes a sample that you can import to see how a COBOL conversion can be set up. The sample is provided as a zip file, **Cobol_Converter_Sample.zip**, on the installation CD-ROM. This zip file contains:

- A zip file with an exported Project that you can import (**EBCDICtoASCII_Sample.zip**)
- An input file
- A COBOL copybook to be used for the conversion

This sample Project converts EBCDIC input data to the format specified in the copybook. The input data is provided by a File eWay. This data is read into a Cobol Copybook OTD generated from the same copybook. The Collaboration shows the use of the Cobol Copybook OTD to retrieve the EBCDIC data as Java Strings for concatenation and forward the output to an outbound File eWay. The resulting file output is the ASCII translation of the original input data.

4.2.1. Importing the Sample Project

The installation CD-ROM includes a sample Project for the Cobol Copybook Converter. To import the Project into Enterprise Designer, follow the steps below.

To import the sample

- 1 Copy **Cobol_Converter_Sample.zip** from the samples directory on the installation CD-ROM to a temporary directory.
- 2 Unzip the file to the temporary directory.
- 3 In the Project Explorer tab of the Enterprise Designer, right-click the Repository and click **Import Project**. The **Select File to Import** dialog box appears.
- 4 Browse to the temporary directory.
- 5 Double-click **EBCDICtoASCII_Sample.zip**. The **File Destination** dialog box appears.
- 6 Click **Import to a new Project**, enter the name of the Project, and click **OK**.
- 7 When the import has successfully completed, right-click the Repository and click **Refresh All from Repository**.

The Project is now imported. Before you deploy and run the Project, do the following:

- Configure the eWays for the correct input and output directories. Refer to the eWay documentation for more information.
- Create an Environment and Deployment Profile, and run the Project. Refer to the *eGate Integrator User's Guide* for more information.

Index

C

- CICS 8
 - COMM AREA 8
- Cobol Copy statements 9
- Cobol Copybook Converter overview 8
- COMM AREA 8
- conventions
 - path name separator 6
 - Windows 6
- converting files 15

D

- document
 - conventions 6
- document purpose and scope 5

F

- features, new 9

I

- implementation 15
- installing 14
- introduction 8

J

- Java methods 9

M

- methods 9

N

- new features 9

O

- organization of information, document 5
- overview 8
- overview, Cobol Copybook Converter 8

P

- PIC X(4) 9
- platforms, supported 9

R

- requirements 9

S

- SeeBeyond Web site 7
- statements
 - Cobol Copy 9
 - usage pointer 9
- supported platforms 9
- supporting documents 7
- system requirements 9

T

- technical support
 - SeeBeyond Web site 7

U

- unsupported features 8
- usage pointer statements 9
- using Cobol Copybook Converter 15

W

- Windows 2000 8
- Windows NT 8
- writing conventions 6