

Server-Side JavaScript Guide

iPlanet Web Server, Enterprise Edition

Version 4.1

8xx-xxxx-xx
August 2000

Copyright © 2000 Sun Microsystems, Inc. Some preexisting portions Copyright © 2000 Netscape Communications Corporation. All rights reserved.

Sun, Sun Microsystems, and the Sun logo, iPlanet, and the iPlanet logo are trademarks or registered trademarks of Sun Microsystems, Inc. in the United States and other countries. Netscape and the Netscape N logo are registered trademarks of Netscape Communications Corporation in the U.S. and other countries. Other Netscape logos, product names, and service names are also trademarks of Netscape Communications Corporation, which may be registered in other countries.

Federal Acquisitions: Commercial Software—Government Users Subject to Standard License Terms and Conditions

The product described in this document is distributed under licenses restricting its use, copying, distribution, and decompilation. No part of the product or this document may be reproduced in any form by any means without prior written authorization of the Sun-Netscape Alliance and its licensors, if any.

THIS DOCUMENTATION IS PROVIDED “AS IS” AND ALL EXPRESS OR IMPLIED CONDITIONS, REPRESENTATIONS AND WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT, ARE DISCLAIMED, EXCEPT TO THE EXTENT THAT SUCH DISCLAIMERS ARE HELD TO BE LEGALLY INVALID.

Copyright © 2000 Sun Microsystems, Inc. Pour certaines parties préexistantes, Copyright © 2000 Netscape Communication Corp. Tous droits réservés.

Sun, Sun Microsystems, et the Sun logo, iPlanet, and the iPlanet logo sont des marques de fabrique ou des marques déposées de Sun Microsystems, Inc. aux Etats-Unis et d'autre pays. Netscape et the Netscape N logo sont des marques déposées de Netscape Communications Corporation aux Etats-Unis et d'autre pays. Les autres logos, les noms de produit, et les noms de service de Netscape sont des marques déposées de Netscape Communications Corporation dans certains autres pays.

Le produit décrit dans ce document est distribué selon des conditions de licence qui en restreignent l'utilisation, la copie, la distribution et la décompilation. Aucune partie de ce produit ni de ce document ne peut être reproduite sous quelque forme ou par quelque moyen que ce soit sans l'autorisation écrite préalable de l'Alliance Sun-Netscape et, le cas échéant, de ses bailleurs de licence.

CETTE DOCUMENTATION EST FOURNIE “EN L'ÉTAT”, ET TOUTES CONDITIONS EXPRESSES OU IMPLICITES, TOUTES REPRÉSENTATIONS ET TOUTES GARANTIES, Y COMPRIS TOUTE GARANTIE IMPLICITE D'APTITUDE À LA VENTE, OU À UN BUT PARTICULIER OU DE NON CONTREFAÇON SONT EXCLUES, EXCEPTÉ DANS LA MESURE OÙ DE TELLES EXCLUSIONS SERAIENT CONTRAIRES À LA LOI.

Contents

Preface	11
What's New in this Release	11
Support for JavaScript 1.4	12
Changes to the JavaScript Application Manager	13
What You Should Already Know	14
JavaScript Versions	15
Where to Find JavaScript Information	15
Upgrading from an Earlier Release	17
Backward Compatibility with Earlier Releases	17
Document Conventions	18
Chapter 1 JavaScript Overview	19
What Is JavaScript?	19
Core, Client-Side, and Server-Side JavaScript	20
Core JavaScript	21
Client-Side JavaScript	21
Server-Side JavaScript	23
JavaScript and Java	26
Debugging JavaScript	28
Visual JavaScript	28
JavaScript and the ECMA Specification	28
Relationship Between JavaScript and ECMA Versions	29
JavaScript Documentation vs. the ECMA Specification	29
JavaScript and ECMA Terminology	29

Part 1 Developing Server Applications	31
Part 1	31
Chapter 2 Getting Started	33
Architecture of JavaScript Applications	34
System Requirements	37
Configuration Information	39
Enabling Server-Side JavaScript	39
Protecting the Application Manager	40
Setting Up for LiveConnect	41
Locating the Compiler	41
Chapter 3 Mechanics of Developing JavaScript Applications	43
Basic Steps in Building an Application	44
JavaScript Application Manager Overview	46
Creating Application Source Files	49
Compiling an Application	50
Installing a New Application	54
Application URLs	56
Controlling Access to an Application	58
Modifying an Application	59
Removing an Application	59
Starting, Stopping, and Restarting an Application	59
Running an Application	61
Debugging an Application	61
Using the Application Manager for Debugging	61
Using Debug URLs	63
Using the debug Function	63
Deploying an Application	63
Application Manager Details	64
Configuring Default Settings	64
Under the Hood	66

Part 2 Server-Side JavaScript Features	69
Part 2	69
Chapter 4 Quick Start with the Sample Applications	71
About Server-Side JavaScript Sample Applications	71
Hello World	73
What Hello World Does	74
Looking at the Source Script	75
Modifying Hello World	78
Hangman	79
Looking at the Source Files	80
Debugging Hangman	84
Chapter 5 Basics of Server-Side JavaScript	87
What to Do Where	88
Overview of Runtime Processing	89
Server-Side Language Overview	93
Prototypes	93
Usage	94
Environment	95
Classes and Objects	96
Embedding JavaScript in HTML	98
The SERVER tag	99
Backquotes	100
When to Use Each Technique	102
Runtime Processing on the Server	103
Constructing the HTML Page	107
Generating HTML	107
Flushing the Output Buffer	108
Changing to a New Client Request	109
Accessing CGI Variables	110
Communicating Between Server and Client	114
Sending Values from Client to Server	114
Sending Values from Server to Client	119
Using Cookies	122
Garbage Collection	126
Error Handling in Server-Side JavaScript	127
Chapter 6 Session Management Service	129
Overview of the Predefined Objects	129

The request Object	133
Properties	134
Working with Image Maps	135
The client Object	136
Properties	137
Uniquely Referring to the client Object	139
Creating a Custom client Object	140
The project Object	144
Properties	144
Sharing the project Object	145
The server Object	145
Properties	146
Sharing the server Object	147
Techniques for Maintaining the client Object	147
Comparing Client-Maintenance Techniques	148
Client-Side Techniques	151
Server-Side Techniques	155
The Lifetime of the client Object	158
Manually Appending client Properties to URLs	160
Sharing Objects Safely with Locking	163
Using Instances of Lock	164
Special Locks for project and server Objects	168
Avoiding Deadlock	169
Chapter 7 Other JavaScript Functionality	175
Mail Service	176
File System Service	180
Security Considerations	180
Creating a File Object	180
Opening and Closing a File	181
Locking Files	182
Working with Files	183
Example	186
Working with External Libraries	187
Guidelines for Writing Native Functions	188
Identifying Library Files	189
Registering Native Functions	189
Using Native Functions in JavaScript	190
Request and Response Manipulation	192
Request Header	193
Request Body	194
Response Header	196

Part 3 LiveWire Database Service	197
---	------------

Part 3	197
---------------------	------------

Chapter 8 Connecting to a Database	199
Interactions with Databases	200
Approaches to Connecting	201
Database Connection Pools	202
Single-Threaded and Multithreaded Databases	204
Guidelines	205
Managing Connection Pools	207
Sharing a Fixed Set of Connection Pools	208
Sharing an Array of Connection Pools	209
Individual Database Connections	212
Maintaining a Connection Across Requests	214
Waiting for a Connection	217
Retrieving an Idle Connection	218
Chapter 9 Working with a Database	225
Interacting with a Relational Database	225
Automatically Displaying Query Results	226
Executing Arbitrary SQL Statements	227
Manipulating Query Results with Cursors	228
Creating a Cursor	229
Displaying Record Values	231
Displaying Expressions and Aggregate Functions	234
Navigating with Cursors	235
Working with Columns	236
Changing Database Information	237
Managing Transactions	241
Using the Transaction-Control Methods	242
Working with Binary Data	243
Calling Stored Procedures	247
Exchanging Information	248
Steps for Using Stored Procedures	249
Registering the Stored Procedure	250
Defining a Prototype for a Stored Procedure	250
Executing the Stored Procedure	251
Working with Result Sets	253
Working with Return Values	260
Working with Output Parameters	261

Closing Stored Procedures	263
Informix and Sybase Exceptions	263
Chapter 10 Configuring Your Database	265
About LiveWire Database Service	266
Checking Your Database Configuration	266
Supported Database Clients and ODBC Drivers	268
DB2	271
Informix	272
Informix Remote	272
Informix Local	274
ODBC	274
ODBC Data Source Names (NT only)	274
OpenLink ODBC Driver (Solaris only)	275
Visigenic ODBC Driver (Unix only)	276
Oracle	277
Oracle Remote	277
Oracle Local	278
Sybase	279
Sybase Remote	279
Sybase Local	280
Sybase (Unix only)	281
Chapter 11 Data Type Conversion	283
About Data Type Conversion	283
Working with Dates and Databases	284
Data-Type Conversion by Database	284
Chapter 12 Error Handling for LiveWire	289
Checking for Error Conditions	289
Return Values	290
Number	290
Object	291
Boolean	292
String	293
Void	294
Error Methods	294
Status Codes	295
Chapter 13 Videoapp Sample Application	297
About the Videoapp Sample Application	297
Configuring Your Environment	298

Connecting to the Database and Recompiling	298
Creating the Database	299
Running Videoapp	303
Looking at the Source Files	304
Application Architecture	306
Modifying videoapp	308
Part 4 Working with LiveConnect	309
Chapter 14 LiveConnect Overview	311
What Is LiveConnect?	311
Working with Wrappers	312
JavaScript to Java Communication	313
The Packages Object	314
Working with Java Arrays	315
Package and Class References	315
Arguments of Type char	316
Example of JavaScript Calling Java	316
Java to JavaScript Communication	317
Using the LiveConnect Classes	319
Accessing Server-Side JavaScript	322
Data Type Conversions	324
JavaScript to Java Conversions	324
Java to JavaScript Conversions	330
Glossary	333
Index	339

This book describes creating Server-Side JavaScript (SSJS) applications. JavaScript is Netscape's cross-platform, object-based scripting language for client and server applications.

This chapter contains these sections:

- What's New in this Release
- What You Should Already Know
- JavaScript Versions
- Where to Find JavaScript Information
- Upgrading from an Earlier Release
- Backward Compatibility with Earlier Releases
- Document Conventions

What's New in this Release

With the release of the 3.x and 4.x versions of the server, LiveWire is fully integrated into the server. Since LiveWire database connectivity is now integrated as the LiveWire Database Service portion of server-side JavaScript, developers do not have to install LiveWire as a separate product. Simply turn on the JavaScript support in the Administration Server to make the necessary components available.

NOTE

The difference between SSJS in Netscape Enterprise Server (NES) 3.x and iPlanet™ Web Server 4.1 is that version 4.1 now uses a JavaScript Runtime from Mozilla.org which supports JavaScript 1.4. Previous versions of SSJS supported JavaScript 1.0, JavaScript 1.1, and JavaScript 1.2.

Support for JavaScript 1.4

JavaScript version 1.4 provides several new features and enhancements, which are discussed in the online manual *Core JavaScript Reference v1.4* at:

<http://www.iplanet.com/docs/>

The following list summarizes the new features:

- Exception handling

You can throw and catch exceptions using the `throw` and `try...catch` statements.

- New operators `in` and `instanceof`.

The `in` operator returns `true` if the specified property is in the specified object. The `instanceof` operator returns `true` if the specified object is of the specified object type.

- Changes to `LiveConnect`.

Several changes to `LiveConnect` improve the way Java and JavaScript code communicate:

- The methods of `java.lang.Object` are inherited by `JavaArray`. In addition, the `JavaArray.toString` method now calls the method `java.lang.Object.toString`.
- You can pass a `JavaClass` object to a Java method which requires an argument of type `java.lang.Class` instead of creating a wrapper around an instance of `java.lang.Class`.
- You cannot construct an instance of `JSEException` with a detail message.
- The three original public constructors for the Java class `netscape.javascript.JSEException` that supported this feature are deprecated.
- You cannot use the `==` operator to compare two instances of `JSObject`. Use `JSObject.equals`.
- Changes to the `eval` method.
 - The top-level `eval` method cannot be called indirectly. In previous versions, it was recommended that this method not be called indirectly; starting with JavaScript 1.4, calling `eval` indirectly could result in a runtime error. This change improves performance.
 - The `eval` method is no longer available as a method of `Object`; use the top-level `eval` function instead.
- Changes to the `Function` object.

- You should no longer specify a function name when using the `arguments` array; the `arguments` array is a variable and is no longer a property of `Function` objects. This change improves performance.
- Deprecated the `Function.arity` property. It has been replaced by the `Function.length` property.

Changes to the JavaScript Application Manager

The functionality of the JavaScript Application Manager has not changed in iPlanet Web Server 4.1 compared to Enterprise Server 3.x. However, it uses the same new color scheme as the Server Manager and it has some minor layout rearrangements.

Figure 1 shows the JavaScript Application Manager in iPlanet Web Server 4.1.

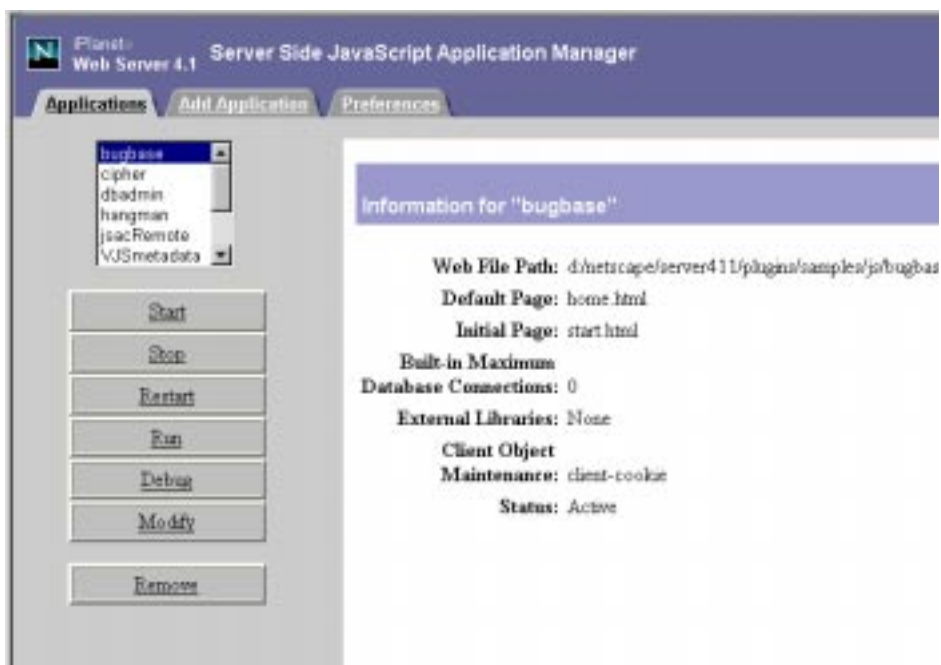


Figure 1 The JavaScript Application Manager in iPlanet Web Server 4.1

The JavaScript Application Manager now has three tabs:

- Applications
Lists the installed applications and displays buttons for Start, Stop, Restart, Run, Debug, Modify and Remove on the left. The right panel displays information about the application selected in the applications list. If you click Modify, the right panel displays fields that let you modify the selected application.
- Add Application.
Lets you add a new application.
- Preferences.
Lets you specify the default values when adding a new application.

Although the names and layout of the tabs and buttons are slightly different in the JavaScript Application Manager in iPlanet Web Server 4.1 than in Enterprise Server 3.6, the underlying functionality is unchanged.

What You Should Already Know

This book assumes you have this basic background:

- A general understanding of the Internet and the World Wide Web (WWW).
- A general understanding of client-side JavaScript. This book does not duplicate core or client-side language information.
- Good working knowledge of Hypertext Markup Language (HTML). Experience with forms and the Common Gateway Interface (CGI) is also useful.
- Some programming experience in Pascal, C, Perl, Visual Basic, or a similar language.
- If you're going to use the LiveWire Database Service, familiarity with relational databases and a working knowledge of Structured Query Language (SQL).

JavaScript Versions

Each version of the server supports a different version of JavaScript. To help you write scripts that are compatible with multiple versions of the server, this manual uses an abbreviation to indicate the server version in which each feature was implemented.

Table 1 JavaScript and Server versions

JavaScript Version	Server version
JavaScript 1.2	Netscape Enterprise Server 3.6 (NES 3.6)
JavaScript 1.4	Netscape Enterprise Server 4.0 (NES 4.0)
JavaScript 1.4	iPlanet Web Server 4.1 (iWS 4.1)

Where to Find JavaScript Information

Because JavaScript can be approached on several levels, its documentation has been split across several books to facilitate your introduction. The suite of online JavaScript books includes:

The server-side JavaScript documentation includes the following books:

- The *Server-Side JavaScript Guide* (this book) provides information about the JavaScript language and its objects. This book contains information for both core and server-side JavaScript. Some core language features work differently on the client than on the server; these differences are discussed in this book.
- The *Server-Side JavaScript Reference* provides reference material for the JavaScript language, including both core and server-side JavaScript.

If you are new to JavaScript, start with Chapter 1, “JavaScript Overview” then continue with the rest of the book. Once you have a firm grasp of the fundamentals, you can use the *Server-Side JavaScript Reference* to get more details on individual objects and statements.

Use the material in this book to familiarize yourself with core and server-side JavaScript. Use the *Client-Side JavaScript Guide* and *Client-Side JavaScript Reference* for information on scripting HTML pages.

*iPlanet Web Server 4.1 Release Notes*¹ provides late-breaking information on iPlanet Web Server 4.1, including some information relevant to server-side JavaScript for iPlanet Web Server 4.1.

The *Programmer’s Guide for iPlanet Web Server*² summarizes the different programming interfaces available with the 4.x versions of Netscape web servers. Use this guide as a roadmap or starting point for exploring the iPlanet Web Server documentation for developers.

In addition, other Netscape books discuss certain aspects of JavaScript particularly relevant to their topic area. These books are mentioned where relevant throughout this book.

The Netscape web site contains much information that can be useful when you’re creating JavaScript applications. Some areas of particular interest include:

- Netscape’s technical support page for information on the LiveWire Database Service. It contains lots of useful pointers to information on using LiveWire in your JavaScript applications.
- Netscape’s support page for information on server-side JavaScript.
- View Source Magazine, Netscape’s online technical magazine for developers. It is updated every other week and frequently contains articles of interest to JavaScript developers.

1. <http://home.netscape.com/eng/server/webserver>

2. <http://developer.ipplanet.com/docs/manuals/enterprise.html>

All of these pages are accessible from:

<http://www.iplanet.com/docs/>

Upgrading from an Earlier Release

If you have previously installed an earlier version of a Netscape web server, you should migrate the server settings when you install the iPlanet Web Server 4.1. For information on how to install the server and migrate settings, see the *iPlanet Web Server Installation and Migration Guide*.

If you have previously created JavaScript applications using Server-Side JavaScript 3.x, you should be aware of these changes that occur when you upgrade to 4.x and migrate old server settings:

- If the previous server had LiveWire turned on, the 3.x server will have server-side JavaScript turned on. Whether or not the Application Manager requires a password is also preserved. For more information, see “Configuration Information,” on page 39 in Chapter 2, “Getting Started.”
- However, upgrading server settings does not move your applications nor does it recompile them for use with the 4.x web server. You must manually recompile user-defined applications before you can use them with a 4.x web server, as described in “Backward Compatibility with Earlier Releases.” Be aware that older applications may not work with their original version of the server after recompiling. If you want to use an application with both servers, you should copy the application instead of moving it.
- For information on changes you may have to make in your code when upgrading, see the next section.

Backward Compatibility with Earlier Releases

You must also be aware of these changes in the behavior of server-side JavaScript applications relative to Netscape Enterprise Server 3.x:

- You must recompile all of your existing JavaScript applications. For information on using the compiler, see “Compiling an Application.” Once you recompile your applications, they will not work under old SSJS installations.

Document Conventions

JavaScript applications run on many operating systems; the information here applies to all versions. File and directory paths are given in Windows format (with backslashes separating directory names). For Unix versions, the directory paths are the same, except that you use slashes instead of backslashes to separate directories.

This book uses uniform resource locators (URLs) of the form

```
http://server.domain/path/file.html
```

In these URLs, *server* represents the name of the server on which you run your application, such as `research1` or `www`; *domain* represents your Internet domain name, such as `netscape.com` or `uiuc.edu`; *path* represents the directory structure on the server; and *file*.html represents an individual filename. In general, items in italics in URLs are placeholders and items in normal monospace font are literals. If your server has Secure Sockets Layer (SSL) enabled, you would use `https` instead of `http` in the URL.

This book uses the following font conventions:

- The monospace font is used for sample code and code listings, API and language elements (such as function names and class names), filenames, pathnames, directory names, HTML tags, and any text that must be typed on the screen. (*Monospace italic font* is used for placeholders embedded in code.)
- *Italic type* is used for book titles, emphasis, variables and placeholders, and words used in the literal sense.
- **Boldface type** is used for glossary terms.

NOTE

Throughout this manual, all Unix-specific descriptions apply to the Linux operating system as well, except where Linux is specifically mentioned.

JavaScript Overview

This chapter introduces JavaScript and discusses some of its fundamental concepts.

This chapter contains the following sections:

- What Is JavaScript?
- Core, Client-Side, and Server-Side JavaScript
- JavaScript and Java
- Debugging JavaScript
- Visual JavaScript
- JavaScript and the ECMA Specification

What Is JavaScript?

JavaScript is Netscape's cross-platform, object-oriented scripting language. Core JavaScript contains a core set of objects, such as `Array`, `Date`, and `Math`, and a core set of language elements such as operators, control structures, and statements. Core JavaScript can be extended for a variety of purposes by supplementing it with additional objects; for example:

- *Client-side JavaScript* extends the core language by supplying objects to control a browser (Navigator or another web browser) and its Document Object Model (DOM). For example, client-side extensions allow an application to place elements on an HTML form and respond to user events such as mouse clicks, form input, and page navigation.
- *Server-side JavaScript* extends the core language by supplying objects relevant to running JavaScript on a server. For example, server-side extensions allow an application to communicate with a relational database, provide continuity of information from one invocation to another of the application, or perform file manipulations on a server.

JavaScript lets you create applications that run over the Internet. Client applications run in a browser, such as Netscape Navigator, and server applications run on a server, such as iPlanet Web Server. Using JavaScript, you can create dynamic HTML pages that process user input and maintain persistent data using special objects, files, and relational databases.


Through JavaScript's LiveConnect functionality, you can let Java and JavaScript code communicate with each other. From JavaScript, you can instantiate Java objects and access their public methods and fields. From Java, you can access JavaScript objects, properties, and methods.

Netscape invented JavaScript, and JavaScript was first used in Netscape browsers.

Core, Client-Side, and Server-Side JavaScript

The components of JavaScript are illustrated in the following figure.

Figure 1-1 The JavaScript language

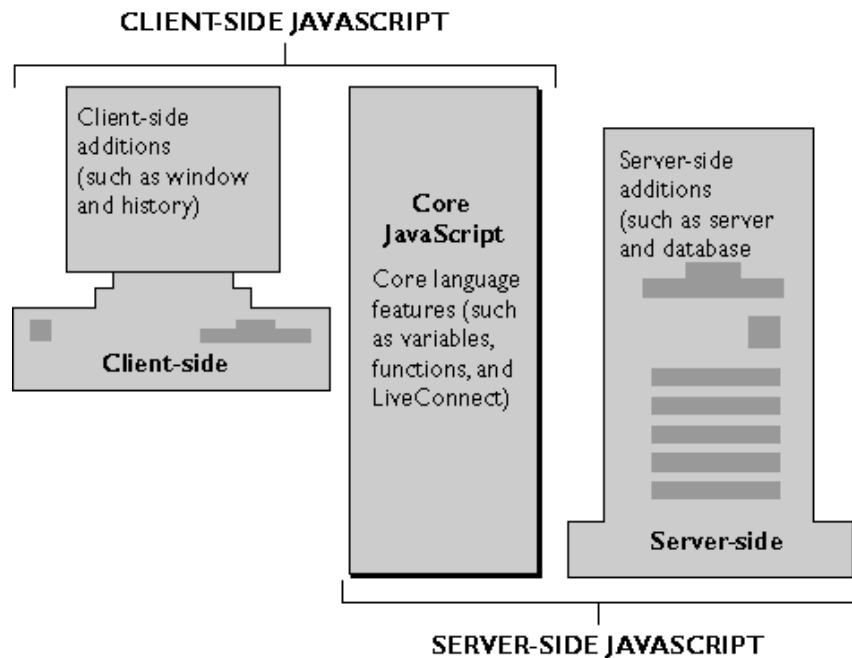

The following sections introduce the workings of JavaScript on the client and on the server.

Core JavaScript

Client-side and server-side JavaScript have the following elements in common:


- Keywords
- Statement syntax and grammar
- Rules for expressions, variables, and literals
- Underlying object model (although client-side and server-side JavaScript have different sets of predefined objects)
- Predefined objects and functions, such as `Array`, `Date`, and `Math`

Client-Side JavaScript

Web browsers such as Navigator (2.0 and later versions) can interpret client-side JavaScript statements embedded in an HTML page. When the browser (or *client*) requests such a page, the server sends the full content of the document, including HTML and JavaScript statements,

over the network to the client. The browser reads the page from top to bottom, displaying the results of the HTML and executing JavaScript statements as they are encountered. This process, illustrated in the following figure, produces the results that the user sees.

Figure 1-2 Client-side JavaScript

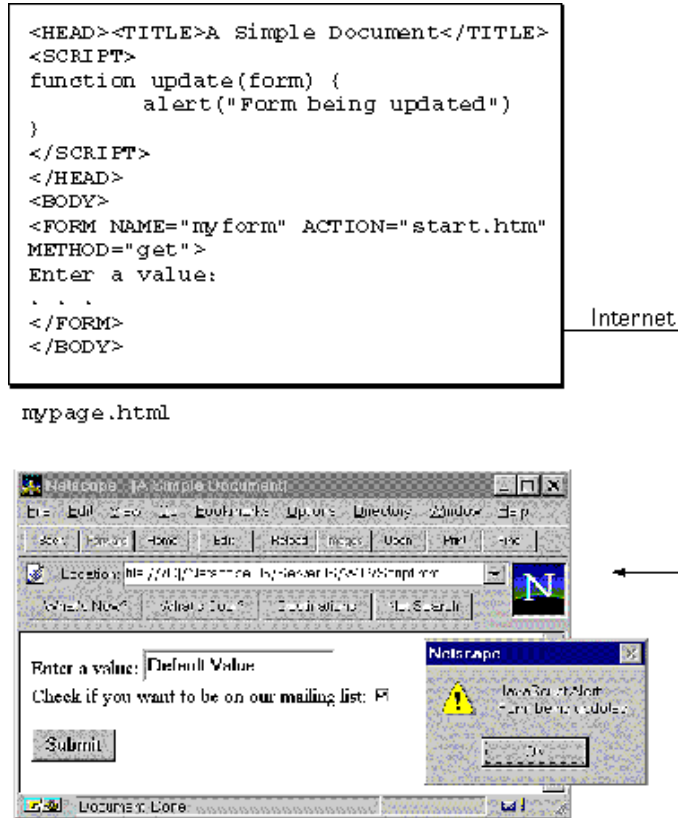

Client-side JavaScript statements embedded in an HTML page can respond to user events such as mouse clicks, form input, and page navigation. For example, you can write a JavaScript function to verify that users enter valid information into a form requesting a telephone number or zip code. Without any network transmission, the embedded JavaScript on the HTML page can check the entered data and display a dialog box if the user enters invalid data.


Different versions of JavaScript work with specific versions of Navigator. For example, JavaScript 1.2 is for Navigator 4.0. Some features available in JavaScript 1.2 are not available in JavaScript 1.1 and hence are not available in Navigator 3.0. For information on JavaScript and Navigator versions, see “JavaScript Versions.”

Server-Side JavaScript

On the server, you also embed JavaScript in HTML pages. The server-side statements can connect to relational databases from different vendors, share information across users of an application, access the file system on the server, or communicate with other applications through LiveConnect and Java. HTML pages with server-side JavaScript can also include client-side JavaScript.

In contrast to pure client-side JavaScript pages, HTML pages that use server-side JavaScript are compiled into bytecode executable files. These application executables are run by a web server that contains the JavaScript runtime engine. For this reason, creating JavaScript applications is a two-stage process.


In the first stage, shown in Figure 1-3, you create HTML pages (which can contain both client-side and server-side JavaScript statements) and JavaScript files. You then compile all of those files into a single executable.

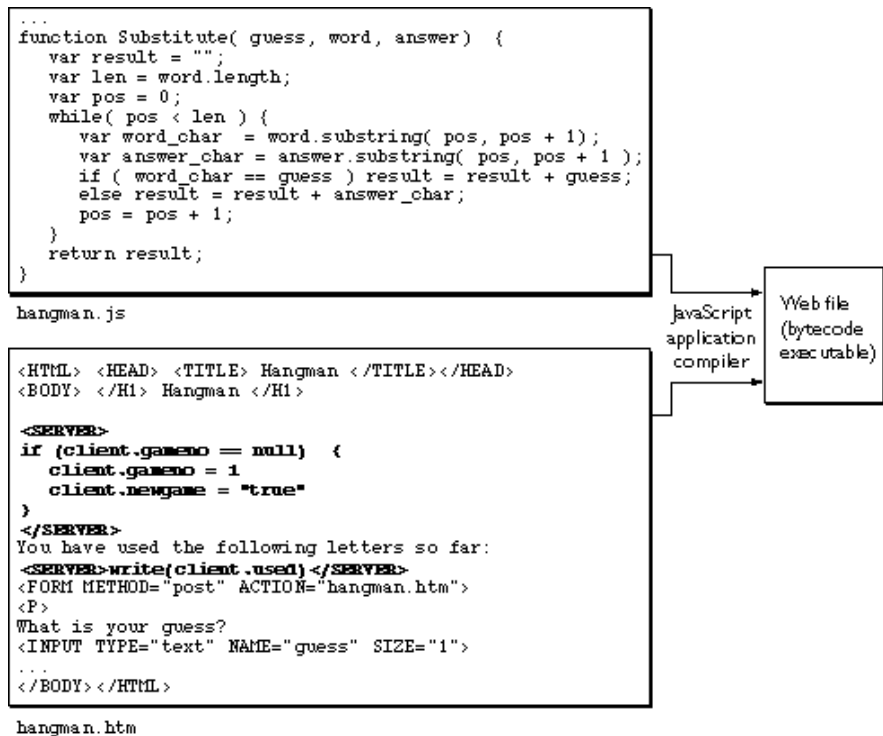Figure 1-3 Server-side JavaScript during development

In the second stage, shown in Figure 1-4, a page in the application is requested by a client browser. The runtime engine uses the application executable to look up the source page and dynamically generate the HTML page to return. It runs any server-side JavaScript statements found on the page. The result of those statements might add new HTML or client-side

JavaScript statements to the HTML page. The run-time engine then sends the resulting page over the network to the Navigator client, which runs any client-side JavaScript and displays the results.

Figure 1-4 Server-side JavaScript during runtime

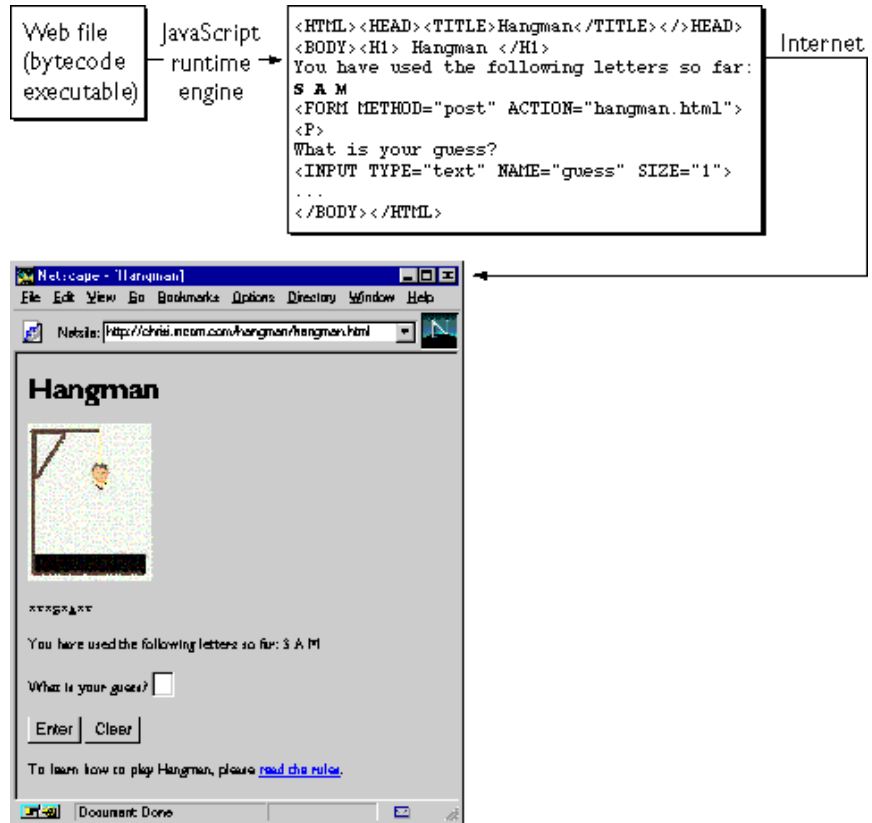

In contrast to standard Common Gateway Interface (CGI) programs, all JavaScript source is integrated directly into HTML pages, facilitating rapid development and easy maintenance. Server-side JavaScript's Session Management Service contains objects you can use to maintain

data that persists across client requests, multiple clients, and multiple applications. Server-side JavaScript's LiveWire Database Service provides objects for database access that serve as an interface to Structured Query Language (SQL) database servers.

JavaScript and Java

JavaScript and Java are similar in some ways but fundamentally different in others. The JavaScript language resembles Java but does not have Java's static typing and strong type checking. JavaScript supports most Java expression syntax and basic control-flow constructs.

In contrast to Java's compile-time system of classes built by declarations, JavaScript supports a runtime system based on a small number of data types representing numeric, Boolean, and string values. JavaScript has a prototype-based object model instead of the more common class-based object model. The prototype-based model provides dynamic inheritance; that is, what is inherited can vary for individual objects. JavaScript also supports functions without any special declarative requirements. Functions can be properties of objects, executing as loosely typed methods.

JavaScript is a very free-form language compared to Java. You do not have to declare all variables, classes, and methods. You do not have to be concerned with whether methods are public, private, or protected, and you do not have to implement interfaces. Variables, parameters, and function return types are not explicitly typed.

Java is a class-based programming language designed for fast execution and type safety. Type safety means, for instance, that you can't cast a Java integer into an object reference or access private memory by corrupting Java bytecodes. Java's class-based model means that programs consist exclusively of classes and their methods. Java's class inheritance and strong typing generally require tightly coupled object hierarchies. These requirements make Java programming more complex than JavaScript authoring.

In contrast, JavaScript descends in spirit from a line of smaller, dynamically typed languages such as HyperTalk and dBASE. These scripting languages offer programming tools to a much wider audience because of their easier syntax, specialized built-in functionality, and minimal requirements for object creation.

Table 1-1 JavaScript compared to Java

JavaScript	Java
Interpreted (not compiled) by client.	Compiled bytecodes downloaded from server, executed on client.

Table 1-1 JavaScript compared to Java

JavaScript	Java
Object-oriented. No distinction between types of objects. Inheritance is through the prototype mechanism, and properties and methods can be added to any object dynamically.	Class-based. Objects are divided into classes and instances with all inheritance through the class hierarchy. Classes and instances cannot have properties or methods added dynamically.
Code integrated with, and embedded in, HTML.	Applets distinct from HTML (accessed from HTML pages).
Variable data types not declared (dynamic typing).	Variable data types must be declared (static typing).
Cannot automatically write to hard disk.	Cannot automatically write to hard disk.

Debugging JavaScript

JavaScript allows you to write complex computer programs. As with all languages, you may make mistakes while writing your scripts. The Netscape JavaScript Debugger allows you to debug your scripts.

For information on using the Debugger, see *Getting Started with Netscape JavaScript Debugger*¹.

Visual JavaScript

Netscape Visual JavaScript is a component-based visual development tool for the Netscape Open Network Environment (ONE) platform. It is primarily intended for use by application developers who want to build cross-platform, standards-based, web applications from ready-to-use components with minimal programming effort. The applications are based on HTML, JavaScript, and Java.

For information on Visual JavaScript, see the *Visual JavaScript Developer's Guide*².

JavaScript and the ECMA Specification

Netscape invented JavaScript, and JavaScript was first used in Netscape browsers. However, Netscape is working with ECMA³ (European Computer Manufacturers Association) to deliver a standardized, international programming language based on core JavaScript. ECMA is an international standards association for information and communication systems. This standardized version of JavaScript, called ECMAScript, behaves the same way in all applications that support the standard. Companies can use the open standard language to develop their implementation of JavaScript. The first version of the ECMA standard is documented in the ECMA-262 specification.

The ECMA-262 standard is also approved by the ISO⁴ (International Organization for Standards) as ISO-16262. You can find a PDF version of ECMA-262⁵ on the iPlanet web site in the JavaScript information. You can also find the specification⁶ on the ECMA web site. The

1. <http://developer.netscape.com/docs/manuals/jsdebug/index.htm>

2. <http://developer.netscape.com/library/documentation/visualjs/index.htm>

3. <http://www.ecma.ch>

4. <http://www.iso.ch>

5. <http://developer.netscape.com/docs/javascript/e262-pdf.pdf>

6. <http://www.ecma.ch/stand/ecma-262.htm>

ECMA specification does not describe the Document Object Model (DOM), which is being standardized by the World Wide Web Consortium (W3C)¹. The DOM defines the way in which HTML document objects are exposed to your script.

Relationship Between JavaScript and ECMA Versions

Netscape works closely with ECMA to produce the ECMA specification. For detailed information which describes the relationship between JavaScript versions and ECMA specifications, refer to mozilla.org.

JavaScript will always include features that are not part of the ECMA specification; JavaScript is compatible with ECMA, while providing additional features.

JavaScript Documentation vs. the ECMA Specification

The ECMA specification is a set of requirements for implementing ECMAScript; it is useful if you want to determine whether a JavaScript feature is supported under ECMA. If you plan to write JavaScript code that uses only features supported by ECMA, then you may need to review the ECMA specification.

The ECMA document is not intended to help script programmers; use the JavaScript documentation for information on writing scripts.

JavaScript and ECMA Terminology

The ECMA specification uses terminology and syntax that may be unfamiliar to a JavaScript programmer. Although the description of the language may differ in ECMA, the language itself remains the same. JavaScript supports all functionality outlined in the ECMA specification.

The JavaScript documentation describes aspects of the language that are appropriate for a JavaScript programmer. For example:

- The global object is not discussed in the JavaScript documentation because you do not use it directly. The methods and properties of the global object, which you do use, are discussed in the JavaScript documentation but are called top-level functions and properties.

1. <http://www.w3.org/>

- The no parameter (zero-argument) constructor with the `Number` and `String` objects is not discussed in the JavaScript documentation, because what is generated is of little use. A `Number` constructor without an argument returns `+0`, and a `String` constructor without an argument returns `""` (an empty string).

Developing Server Applications

Getting Started

Mechanics of Developing JavaScript Applications

Getting Started

This chapter provides an overview of what a typical server-side JavaScript application looks like, and it shows you how to set up your system for server-side development.


This chapter contains the following sections:

- Architecture of JavaScript Applications
- System Requirements
- Configuration Information

Architecture of JavaScript Applications

As discussed in earlier sections, JavaScript applications have portions that run on the client and on the server. In addition, many JavaScript applications use the LiveWire Database Service to connect the application to a relational database. For this reason, you can think of JavaScript applications as having a three-tier client-server architecture, as illustrated in Figure 2-1.

Figure 2-1 Architecture of the client-server JavaScript application environment

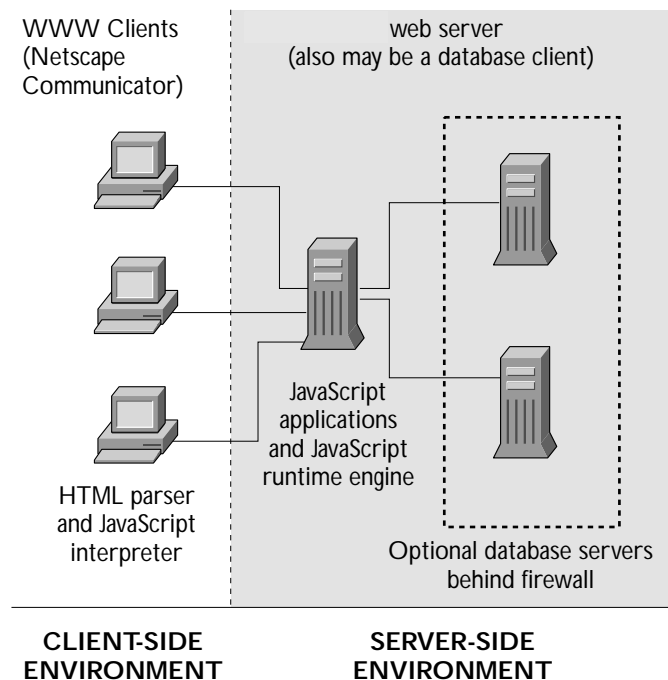

The three tiers are:


- *WWW clients (such as Netscape Navigator clients):* This tier provides a cross-platform end-user interface to the application. This tier can also contain some application logic, such as data-validation rules implemented in client-side JavaScript. Clients can be inside or outside the corporate firewall.
- *Netscape WWW server/database client:* This tier consists of a Netscape server, with server-side JavaScript enabled. It contains the application logic, manages security, and controls access to the application by multiple users, using server-side JavaScript. This tier allows clients both inside and outside the firewall to access the application. The WWW server also acts as a client to any installed database servers.

- *Database servers:* This tier consists of SQL database servers, typically running on high-performance workstations. It contains all the database data, metadata, and referential integrity rules required by the application. This tier typically is inside the corporate firewall and can provide a layer of security in addition to that provided by the WWW server. iPlanet Web Server, Enterprise Edition supports the use of ODBC, DB2, Informix, Oracle, and Sybase database servers. iPlanet Web Server, FastTrack Edition supports only ODBC. For further information about the LiveWire Database Service, see Part 3, “LiveWire Database Service.”

The client-side JavaScript environment runs as part of WWW clients, and the server-side JavaScript environment runs as part of an iPlanet Web Server with access to one or more database servers. Figure 2-2 shows more detail of how the server-side JavaScript environment, and applications built for this environment, fit into the iPlanet Web Server.

The top part of Figure 2-2 shows how server-side JavaScript fits into an iPlanet Web Server. Inside the web server, the server-side JavaScript runtime environment is built from three main components which are listed below. The JavaScript Application Manager then runs on top of server-side JavaScript, as do the sample applications provided by iPlanet (such as the `videoapp` application) and any applications you create.

Figure 2-2 Server-side JavaScript in the iPlanet server environment

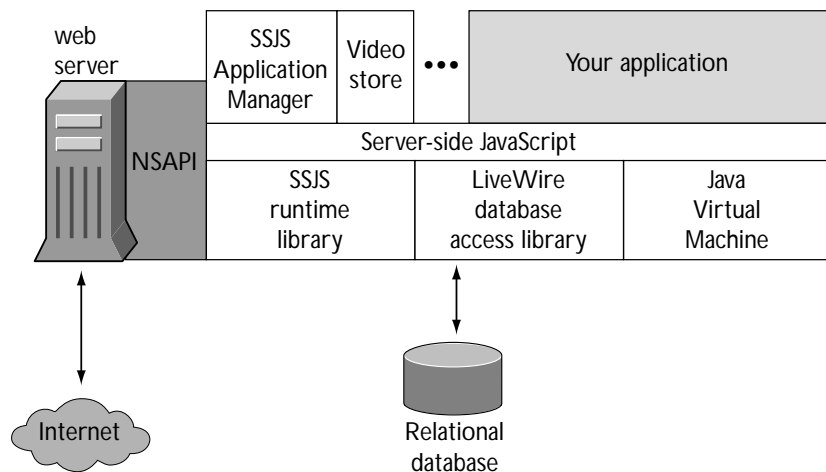

These are the three primary components of the JavaScript runtime environment:

- *The JavaScript runtime library:* This component provides basic JavaScript functionality. An example is the Session Management Service, which provides predefined objects to help manage your application and share information between the client and the server and between multiple applications. The Session Management Service is described in Chapter 6, “Session Management Service.”
- *The LiveWire database access library:* This component extends the base server-side JavaScript functionality with classes and objects that provide seamless access to external database servers. It is described in Part 3, “LiveWire Database Service.”
- *The Java virtual machine:* Unlike the other components, the Java virtual machine is not only for use with JavaScript; any Java application running on the server uses this virtual machine. The Java virtual machine has been augmented to allow JavaScript applications to access Java classes, using JavaScript’s LiveConnect functionality. LiveConnect is described in Chapter 14, “LiveConnect Overview.”

In general, a JavaScript application can contain statements interpreted by the client (with the JavaScript interpreter provided with Netscape Navigator or some other web browser) and by the server (with the JavaScript runtime engine just discussed).

When you run a JavaScript application, a variety of things occur, some on the server and some on the client. Although the end user does not need to know the details, it is important for you, the application developer, to understand what happens “under the hood.”

In creating your application, you write HTML pages that can contain both server-side and client-side JavaScript statements. In the source code HTML, client-side JavaScript is delimited by the `SCRIPT` tag and server-side JavaScript by the `SERVER` tag.

You can also write files that contain only JavaScript statements and no HTML tags. A JavaScript file can contain either client-side JavaScript or server-side JavaScript; a single file cannot contain both client-side and server-side objects or functions.

The JavaScript VM used in iPlanet Web Server 4.1 implements significant improvements in the processing of local variables (that is, variables that are declared inside a function) as compared to NES 3.6. Therefore it is suggested that use of global variables (that is, variables that are

declared between the `<server>` and `</server>` tags) be minimized and applications be rewritten to use functions as much as possible. This can improve the application performance significantly.

If the HTML and JavaScript files contain server-side JavaScript, you then compile them into a single JavaScript application executable file. The executable is called a web file and has the extension `.web`. The JavaScript application compiler turns the source code HTML into platform-independent bytecodes, parsing and compiling server-side JavaScript statements.

Finally, you deploy your application on your web server and use the JavaScript Application Manager to install and start the application, so that users can access your application.

At runtime, when a client requests a page from a server-side JavaScript application, the runtime engine locates the representation of that file in the application's web file. It runs all the server code found and creates an HTML page to send to the client. That page can contain both regular HTML tags and client-side JavaScript statements. All server code is run on the server, before the page goes to the client and before any of the HTML or client-side JavaScript is executed. Consequently, your server-side code cannot use any client-side objects, nor can your client-side code use any server-side objects.

For more details, see Chapter 5, "Basics of Server-Side JavaScript."

System Requirements

To develop and run JavaScript applications that take advantage of both client-side and server-side JavaScript, you need appropriate development and deployment environments. In general, it is recommended that you develop applications on a system other than your deployment (production) server because development consumes resources (for example, communications ports, bandwidth, processor cycles, and memory). Development might also disrupt end-user applications that have already been deployed.

A JavaScript development environment consists of

- *Development tools* for authoring and compiling JavaScript applications. These tools typically are resident on the development machine.
- *A development machine with a web server* for running JavaScript applications that are under development.
- *A deployment machine with a web server* for deploying finished applications. End users access completed applications on this server.

The development tools needed include:

- A JavaScript-enabled browser, such as Netscape Navigator, included in Netscape Communicator.

- A JavaScript application compiler, such as the one bundled with Netscape web servers.
- An editor, such as Emacs or Notepad.

The development and deployment machines require the following software:

- A web server.
- A JavaScript runtime engine, such as the one bundled with Netscape web servers.
- A way to configure your server to run JavaScript applications, as provided in the JavaScript Application Manager bundled with Netscape web servers.

In addition, if your application uses JavaScript's LiveWire Database Service, you need the following:

- Relational database server software on your database server machine. For more information, refer to your database server documentation. In some cases, you may want to install the web server and the database server on the same machine. For specific requirements for server-side JavaScript, see Chapter 10, "Configuring Your Database."
- Your database's client and networking software on your web server machine. If you use one machine as both your database server and web server, typically the necessary database client software is installed when the database server is installed. Otherwise, you must ensure that the database client software is installed on the same machine as the web server, so that it can access the database as a client. For more information on database client software requirements, refer to the database vendor's documentation.

Configuration Information

This section provides configuration information for using server-side JavaScript. For additional information on setting up your database to work with the LiveWire Database Service, see Chapter 10, “Configuring Your Database.”

Enabling Server-Side JavaScript

To run Server Side JavaScript applications on your server, you must enable the JavaScript runtime engine from your Server Manager by clicking Programs and then choosing Server Side JavaScript. At the prompt “Activate the JavaScript application environment?”, choose Yes and click OK. You are also asked about restricting access to the Application Manager. For more information, see “Protecting the Application Manager.”

NOTE

If you do not enable the JavaScript runtime engine, JavaScript applications cannot run on the server.

To use both servlets and LiveWire, you need to enable Server Side JavaScript before enabling Java. Both can be enabled using the programs menu of the Administration Server. If you modify the classpath in `obj.conf`, your changes will be lost if you enable/disable either Server Side JavaScript or Java from the programs menu of the Administration Server. An alternative to editing the classpath directive in the `obj.conf` is setting the `CLASSPATH` environment variable in Unix or setting the `CLASSPATH` variable in the System settings for

Windows NT. If you must edit the `obj.conf` directly, please be sure to back up your changes. For iPlanet Web Server 4.1, you should add `CLASSPATH` info to the JVM configuration files (`jvm12.conf` for Solaris and NT) via the Web Server Administration Server interface.

Once you activate the JavaScript application environment, you must stop and restart your web server for the associated environment variables to take effect. If you do not, JavaScript applications that use the LiveWire Database Service will not run.

You can also define a thread pool to be used for server-side JavaScript applications. For more information about thread pools, see “Adding and Using Thread Pools” in Chapter 7, “Configuring Server Preferences,” in the *iPlanet Web Server Administrator’s Guide*.

Protecting the Application Manager

The Application Manager provides control over JavaScript applications. Because of its special capabilities, you should protect it from unauthorized access. If you don’t restrict access to the Application Manager, anyone can add, remove, modify, start, and stop applications on your server. This can have undesirable consequences.

You (the JavaScript application developer) need to have permission to use the Application Manager on your development server, because you use it to work with the application as you develop it. Your web server administrator, however, may choose to not give you this access to the deployment server.

When you enable the JavaScript runtime engine in the Server Manager, a prompt asks you whether to restrict access to the Application Manager. Choose Yes to do so, then click OK. (Yes is the default.) After this point, anyone attempting to access the Application Manager must enter the Server Manager user name and password to use the Application Manager and the `dbadmin` sample application. For more information, see the administrator’s guide for your web server.

If your server is not using the Secure Sockets Layer (SSL), the user name and password for the Application Manager are transmitted unencrypted over the network. An intruder who intercepts this data can get access to the Application Manager. If you use the same password for your administration server, the intruder will also have control of your server. Therefore, it is

recommended that you do not use the Application Manager outside your firewall unless you use SSL. For instructions on how to turn on SSL for your server, see the administrator's guide for your web server.

Setting Up for LiveConnect

In order to use Java classes in LiveConnect, you need to set up the server's CLASSPATH. For a complete description of this procedure, refer to the *Programmer's Guide to Servlets for iPlanet Web Server* and the *iPlanet Web Server Administrator's Guide*.

Locating the Compiler

Installation of a Netscape server does not change your PATH environment variable to include the directory in which the JavaScript application compiler is installed. If you want to be able to easily refer to the location of the compiler, you must modify this environment variable.

On Unix systems, you have various choices on how to change your PATH environment variable. You can add `$NSHOME/bin/https/lib`, where `$NSHOME` is the directory in which you installed the server. See your system administrator for information on how to do so.

To change your NT system path, start the Control Panel application, locate the System dialog box, and set the PATH variable in the Environment settings to include the `%NSHOME%\bin\https\bin`, where `NSHOME` is the directory in which you installed the server.

If you move the JavaScript application compiler to a different directory, you must add that directory to your PATH environment variable.


Mechanics of Developing JavaScript Applications

This chapter describes the process of developing your application, such as how to use the JavaScript application compiler and how to use the Application Manager of Netscape servers to install or debug your application. For information on using only client-side JavaScript, see the *<BookName>JavaScript Guide*.

Basic Steps in Building an Application

Normally, HTML is static: after you write an HTML page, its content is fixed. The fixed content is transmitted from the server to the client when the client accesses the page's URL. With JavaScript, you can create HTML pages that change based on changing data and user actions. Figure 3-1 shows the basic procedure for creating and running a JavaScript application.

Figure 3-1 Creating and running a JavaScript application

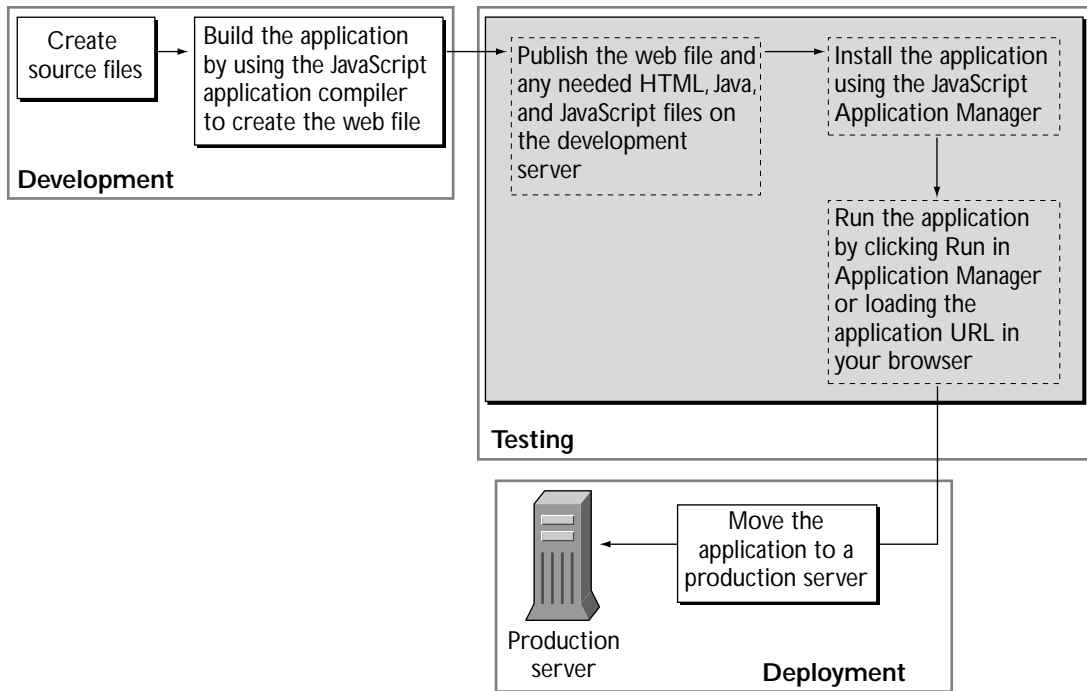

You take these basic steps to build a JavaScript application:

1. Create the source files. The source files can be HTML files with embedded JavaScript, files containing only JavaScript, or Java source files. (See “Creating Application Source Files.”)

Note that the JavaScript VM used in iPlanet Web Server 4.1 implements significant improvements in the processing of local variables (that is, variables that are declared inside a function) as compared to NES 3.6. Therefore it is suggested that use of global variables (that is, variables that are declared between the `<server>` and `</server>` tags) be minimized and applications be rewritten to use functions as much as possible. This can improve the application performance significantly.

2. Build the application by using the JavaScript application compiler to create the bytecode executable (`.web` file). (See “Compiling an Application.”) Compile Java source files into class files.
3. Publish the web file, any needed uncompiled HTML, image, and client-side JavaScript files, and compiled Java class files in appropriate directories on the server. You can use the Netscape Web Publisher to publish your files, as described in the *Web Publisher User's Guide*.
4. Install the application for the first time (see “Installing a New Application.”) using the JavaScript Application Manager. You also use the Application Manager to restart an application after rebuilding it (see “Starting, Stopping, and Restarting an Application.”). Installing or restarting the application enables the JavaScript runtime engine to run it.
 - After installing an application, you may want to protect it. See “Deploying an Application.” You do not need to restart an application after you initially install it.
5. Run the application by clicking Run in the Application Manager or loading the application URL in your browser. (See “Running an Application” and “Application URLs”) For example, to run Hello World, load `http://server.domain/world/`. You can also debug the application by clicking Debug in the Application Manager. (See “Debugging an Application.”)
6. After you have completed developing and testing your application, you need to deploy it to make it available to users. Deploying generally involves installing it on a production server and changing access restrictions. (See “Deploying an Application.”)

Before you can develop JavaScript applications, you need to enable the runtime engine on the server and should protect the JavaScript Application Manager from unauthorized access. For more information, see “Configuration Information,” on page 39 and Chapter 2, “Getting Started.”

JavaScript Application Manager Overview

Before learning how to create JavaScript applications, you should become familiar with the JavaScript Application Manager. You can use the Application Manager to accomplish these tasks:

- Add a new JavaScript application.
- Modify any of the attributes of an installed application.
- Stop, start, and restart an installed application.
- Run and debug an active application.
- Remove an installed application.


The Application Manager is itself a JavaScript application that demonstrates the power and flexibility of JavaScript. You start the JavaScript Application Manager from the following URL in Navigator:

`http://server.domain/appmgr`

In response, the Application Manager displays the page shown in Figure 3-2 for Netscape Enterprise Server 3.x and Figure 3.3 for iPlanet Web Server 4.1.

Figure 3-2 Application Manager in Enterprise Server 3.x

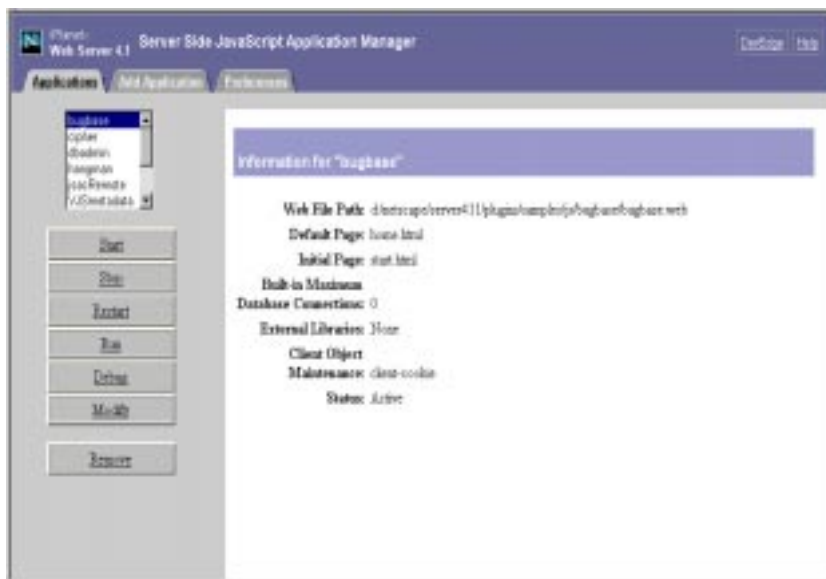

Figure 3-3 Application Manager in iPlanet Web Server 4.1

The Application Manager displays, in a scrolling list in the left frame, all JavaScript applications currently installed on the server. Select an application by clicking its name in the scrolling list.

For the selected application, the right frame displays the following information:

- application name at the top of the frame
- path of the application web file on the server
- default and initial pages for the application
- maximum number of database connections allowed for the predefined database object. (This is provided for backward compatibility with applications that use database objects; for new applications that use a dbpool, ignore this field. See See “Database Connection Pools,” on page 202 for how to set this parameter for a dbpool.)
- external libraries (if any)
- client object maintenance technique
- status of the application: *active* or *stopped* (Users can run only active applications. Stopped applications are not accessible.)

For a description of these fields, see “Installing a New Application.”

Click the Add Application button at the top to add a new application.

Click Configure (in Enterprise Server 3.x) or Preferences (in iPlanet Web Server 4.1) to configure the default settings for the Application Manager.

Click Documentation to reach Netscape’s technical support page for server-side JavaScript, including links to all sorts of documentation about it. Click Help for more instructions on using the Application Manager.

Creating Application Source Files

The first step in building a JavaScript application is to create and edit the source files. The web file for a JavaScript application can contain two kinds of source files:

- Files with standard HTML or JavaScript embedded in HTML. These files have the file extension (suffix) `.html` or `.htm`.
- Files with JavaScript functions only. These files have the file extension `.js`.

When you use JavaScript in an HTML file, you must follow the rules outlined in “Embedding JavaScript in HTML.”

Do not use any special tags in `.js` files; the JavaScript application compiler on the server and the JavaScript interpreter on the client assume everything in the file is JavaScript. While an HTML file is used on both the client and the server, a single JavaScript file must be either for

use on the server or on the client; it cannot be used on both. Consequently, a JavaScript file can contain either client-side JavaScript or server-side JavaScript, but a single file cannot contain both client-side and server-side objects or functions.

The JavaScript application compiler compiles and links the HTML and JavaScript files that contain server-side JavaScript into a single platform-independent bytecode web file, with the file extension `.web`, as described in “Compiling an Application.”

You install a web file to be run with the JavaScript runtime engine, as described in “Installing a New Application.”

Compiling an Application

You compile a JavaScript application using the JavaScript application compiler, `jsac`. The compiler creates a web file from HTML and JavaScript source files.

NOTE

iPlanet Web Server 4.1 supports JavaScript Application Compiler version 24.13. Note that compiled applications using “=” as the Equal operator will fail using the new compiler. You must use “==” as the Equal (==) operator.

For ease of accessing the compiler, you may want to add the directory in which it is installed to your `PATH` environment variable. For information on how to do so, see “Locating the Compiler,” on page 41 in Chapter 3, “Mechanics of Developing JavaScript Applications.”

You also need to add the `server_root/bin/httpd/lib` directory to `LD_LIBRARY_PATH` (or `LIBPATH` or `SHLIB_PATH` on Unix platforms), and `server_root/bin/https/bin` to `PATH` on Windows NT platforms.

You only need to compile those pages containing server-side JavaScript or both client-side and server-side JavaScript. You do not need to compile pages that contain only client-side JavaScript. You can do so, but runtime performance is better if you leave them uncompiled.

The compiler is available from any command prompt. Use the following command-line syntax to compile and link JavaScript applications on the server:

```
jsac [-h] [-c] [-v] [-d] [-l]
      [-o outfile.web]
      [-i inputFile]
      [-p pathName]
      [-f includeFile]
      [-r errorFile]
      [-a 1.2]
      script1.html [...] scriptN.html
      [funct1.js ... functN.js]
```

Items enclosed in square brackets are optional. The syntax is shown on multiple lines for clarity. The `scriptN.html` and `functN.js` files are the input files to the compiler. There must be at least one HTML file. By default, the HTML and JavaScript files are relative to the current directory. Files you specify must be either JavaScript files or HTML files; you cannot specify other files, such as GIF files.

On all platforms, you may use either the dash (`-`) or the forward slash (`/`) to indicate a command-line option. That is, the following lines are equivalent:

```
jsac -h
jsac /h
```

Note that because the forward slash indicates a command-line option, an input file cannot start with a forward slash to indicate that it is an absolute pathname. That is, the following call is illegal:

```
jsac -o myapp.web /usr/vpg/myapp.html
```

This restriction does not apply to any of the pathnames you supply as arguments to command-line options; only to the input files. On NT, you can instead use backslash (\) to indicate an absolute pathname in an input file, as in the following call:

```
jsac -o myapp.web \usr\vpg\myapp.html
```

On Unix, you must use the `-i` command-line option to specify an absolute pathname, as described below.

The following command-line options are available:

- `-h`: Displays compiler syntax help. If you supply this option, don't use any other options.
- `-c`: Checks syntax only; does not generate a web file. If you supply this option, you do not need to supply the `-o` option.
- `-v`: (Verbose) Displays information about the running of the compiler.
- `-d`: Displays generated JavaScript contents.
- `-l`: Specifies the character set to use when compiling (such as `iso-8859-1`, `x-sjis`, or `eu-kr`)
- `-o outfile`: Creates a bytecode-format web file, named `outfile.web`. If you do not supply this option, the compiler does not generate a web file. (Omit this option only if you're using the `-c` option to check syntax or `-h` to get help.)
- `-i inputFile`: Allows you to specify an input file using its full pathname instead of a relative pathname. You can provide only one filename to this option. If you need to specify multiple filenames using full pathnames, use the `-f` option.
- `-p pathName`: Specifies a directory to be the root of all relative pathnames used during compilation. (Use before the `-f` option.) You can provide only one pathname to this option.
- `-f includeFile`: Specifies a file that is actually a list of input files, allowing you to circumvent the character limit for a command line. You can provide only one filename to this option. The list of input files in `includeFile` is white-space delimited. If a filename contains a space, you must enclose the filename in double quotes.
- `-r errorFile`: Redirects standard output (including error messages) to the specified file. You can provide only one filename to this option.
- `-a 1.2`: Sets language version to 1.2 for backward compatibility.

For example, the following command compiles and links two JavaScript-enhanced HTML pages, `main.html` and `hello.html`, and a server-side JavaScript file, `support.js`, creating a binary executable named `myapp.web`. In addition, during compilation, the compiler prints progress information to the command line.

```
jsac -v -o myapp.web main.html hello.html support.js
```

As a second example, the following command compiles the files listed in the file `looksee.txt` into a binary executable called `looksee.web`:

```
jsac -f looksee.txt -o looksee.web
```

Here, `looksee.txt` might contain the following:

```
looksee1.html  
looksee2.html  
\myapps\jsplace\common.js  
looksee3.html
```


Installing a New Application

You cannot run an application and clients cannot access it until you install it. Installing an application identifies it to the server. After you have installed the application, you can rebuild and run it any number of times. You need to reinstall it only if you subsequently remove it. You can install up to 120 JavaScript applications on one server.

Before you install, you must move all application-related files to the correct directory, by publishing the files. Otherwise, you'll get an error when you install the application. For security reasons, you may not want to publish your JavaScript source files on your deployment server. See "Application URLs" for restrictions on where you can place your files.

To install a new application with the Application Manager, click Add Application. In response, the Application Manager displays, in its right frame, the form shown in Figure 3-4. (The color scheme is different in iPlanet Web Server 4.1.)

Figure 3-4 Add Application form

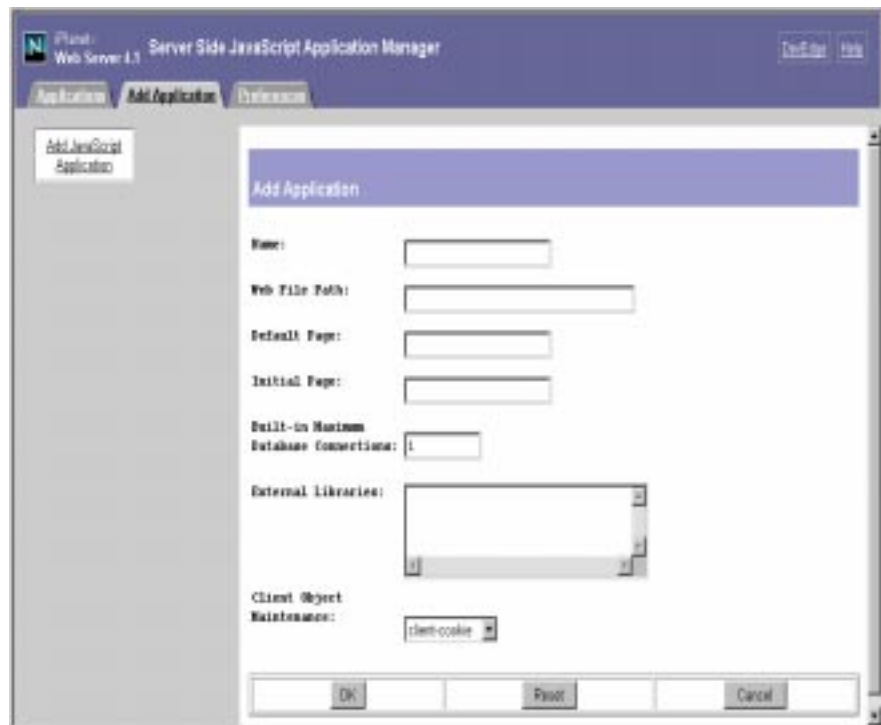

The screenshot shows the 'Add Application' form within the iPlanet Web Server 4.1 Server Side JavaScript Application Manager. The form is titled 'Add Application' and contains the following fields:

- Name:** A text input field.
- Web File Path:** A text input field.
- Default Page:** A text input field.
- Initial Page:** A text input field.
- Build-in Maximum Database Connections:** A text input field with the value '1'.
- External Libraries:** A list box containing one entry, 'i'.
- Client Object Maintenance:** A dropdown menu with 'client-cookie' selected.

At the bottom of the form are three buttons: 'OK', 'Reset', and 'Cancel'.

Fill in the fields in the Add Application form, as follows:

- *Name*: the name of the application. This name defines the application URL. For example, the name of the Hello World application is “world,” and its application URL is `http://server.domain/world`. This is a required field, and the name you type must be different from all other application names on the server. See “Application URLs.”
- *Web File Path*: the full pathname of the application web file. This is a required field. For example, if you installed the Netscape server in `c:\nshome`, the web file path for the Hello World application is `c:\nshome\plugins\samples\js\world\hello.web`.
- *Default Page*: the page that the JavaScript runtime engine serves if the user does not indicate a specific page in the application. This page is analogous to `index.html` for a standard URL.
- *Initial Page*: the page that the JavaScript runtime engine executes when you start the application in the Application Manager. This page is executed exactly once per running of the application. It is generally used to initialize values, create locks, and establish database connections. Any JavaScript source on this page cannot use either of the predefined `request` or `client` objects. This is an optional field.
- *Built-in Maximum Database Connections*: the default value for the maximum number of database connections that this application can have at one time using the predefined database object. (This is provided for backward compatibility with applications that use database objects; for new applications that use a `dbpool` object, ignore this field. “Database Connection Pools,” on page 202 for how to set this parameter for a `dbpool` object.)
- *External Libraries*: the pathnames of external libraries to be used with the application. If you specify multiple libraries, delimit the names with either commas or semicolons. This is an optional field. Libraries installed for one application can be used by all applications on the server. See “Working with External Libraries.”
- *Client Object Maintenance*: the technique used to save the properties of the client object. This can be client cookie, client URL, server IP, server cookie, or server URL. See “Techniques for Maintaining the client Object.”

After you have provided all the required information, click Enter to install the application, Reset to clear all the fields, or Cancel to cancel the operation.

You must stop and restart your server after you add or change the external libraries for an application. You can restart a server from your Server Manager; see the administrator's guide for your web server for more information.

Application URLs

When you install an application, you must supply a name for it. This name determines the base application URL, the URL that clients use to access the default page of a JavaScript application. The base application URL is of the form

```
http://server.domain/appName
```

Here, *server* is the name of the HTTP server, *domain* is the Internet domain (including any subdomains), and *appName* is the application name you enter when you install it. Individual pages within the application are accessed by application URLs of the form

```
http://server.domain/appName/page.html
```

Here, *page* is the name of a page in the application. For example, if your server is named *coyote* and your domain name is *royalairways.com*, the base application URL for the hangman sample application is

```
http://coyote.royalairways.com/hangman
```


When a client requests this URL, the server generates HTML for the default page in the application and sends it to the client. The application URL for the winning page in this application is

```
http://coyote.royalairways.com/hangman/youwon.html
```

NOTE

Before you install an application, be sure the application name you choose does not usurp an existing URL on your server. The JavaScript runtime engine routes all client requests for URLs that match the application URL to the directory specified for the web file. This circumvents the server's normal document root.

For instance, suppose a client requests a URL that starts with this prefix from the previous example:

```
http://coyote.royalairways.com/hangman
```

In this case, the runtime engine on the server looks for a document in the `samples\hangman` directory and not in your server's normal document root. The server also serves pages in the directory that are not compiled into the application.

You can place your source (uncompiled) server-side JavaScript files in the same directory as the web file; however, you should do so only for debugging purposes. When you deploy your application to the public, for security reasons, you should not publish uncompiled server-side JavaScript files.

Controlling Access to an Application

When you install an application, you may want to restrict the users who can access it, particularly if the application provides access to sensitive information or capabilities.

If you work on a development server inside a firewall, then you may not need to worry about restricting access while developing the application. It is convenient to have unrestricted access during development, and you may be able to assume that the application is safe from attack

inside the firewall. If you use sample data during the development phase, then the risk is even less. However, if you leave your application open, you should be aware that anyone who knows or guesses the application URL can use the application.

When you finish development and are ready to deploy your application, you should reconsider how you want to protect it. You can restrict access by applying a server configuration style to the application. For information on configuration styles, see the administrator's guide for your web server.

Modifying an Application

To modify an application, select the application name in the list of applications and click **Modify**.

You can change any of the fields defined when you installed the application, except the application name. To change the name of an application, you must remove the application and then reinstall it.

If you modify the fields of a stopped application, the Application Manager automatically starts it. When you modify fields of an active application, the Application Manager automatically stops and restarts it.

Removing an Application

To remove an application, select it in the list of applications and click **Remove**. The Application Manager removes the application so that it cannot be run on the server. Clients are no longer able to access the application. If you delete an application and subsequently want to run it, you must install it again.

Although clients can no longer use the application, removing it with the Application Manager does not delete the application's files from the server. If you want to delete them as well, you must do so manually.

Starting, Stopping, and Restarting an Application

After you first install an application, you must start it to run it. Select the application in the list of applications and click **Start**. If the application successfully starts, its status changes from **Stopped** to **Active**.

You can also start an application by loading the following URL:

```
http://server.domain/appmgr/control.html?name=appName&cmd=start
```

Here, *appName* is the application name. You cannot use this URL unless you have access privileges for the Application Manager.

To stop an application and thereby make it inaccessible to users, select the application name in the list of applications and click Stop. The application's status changes to Stopped and clients can no longer run the application. You must stop an application if you want to move the web file or update an application from a development server to a deployment server.

You can also stop an application by loading the following URL:

```
http://server.domain/appmgr/control.html?name=appName&cmd=stop
```

Here, *appName* is the application name. You cannot use this URL unless you have access privileges for the Application Manager.

You must restart an application each time you rebuild it. To restart an active application, select it in the list of applications and click Restart. Restarting essentially reinstalls the application; the software looks for the specified web file. If there is not a valid web file, then the Application Manager generates an error.

You can also restart an application by loading the following URL:

```
http://server.domain/appmgr/control.html?name=appName&cmd=restart
```

Here, *appName* is the application name. You cannot use this URL unless you have access privileges for the Application Manager.

Running an Application

Once you have compiled and installed an application, you can run it in one of two ways:

- Select the application name in the list of applications, and then click Run. In response, the Application Manager opens a new Navigator window to access the application.
- Load the base application URL in Navigator by typing it in the Location field.

The server then generates HTML for the specified application page and sends it to the client.

Debugging an Application

To debug an application, do one of the following:

- Select the application name in the list of applications, and then click Debug, as described in “Using the Application Manager for Debugging.”
- Load the application’s debug URL, as described in “Using Debug URLs.”

You can use the debug function to display debugging information, as described in “Using the debug Function.”

Once you’ve started debugging a JavaScript application in this way, you may not be able to stop or restart it. In this situation, the Application Manager displays the warning “Trace is active.” If this occurs, do the following:

1. Close any windows running the debugger.
2. Close any windows running the affected application.
3. In the Application Manager, select the affected application and click Run.

You can now stop or restart the application.

Using the Application Manager for Debugging

To debug an application, select it in the list of applications and then click Debug. In response, the Application Manager opens a new Navigator window in which the application runs. The trace utility also appears, either in a separate frame of the window containing the application or


in another window altogether. (You can determine the appearance of the debug window when you configure the default settings for the Application Manager, as described in “Configuring Default Settings.”)

The trace utility displays this debugging information:

- values of object properties and arguments of debug functions called by the application
- property values of the `request` and `client` objects, before and after generating HTML for the page
- property values of the `project` and `server` objects
- indication of when the application assigns new values to properties
- indication of when the runtime engine sends content to the client

Figure 3-5 shows what you might see if you debug the Hangman application.

Figure 3-5 Debugging Hangman

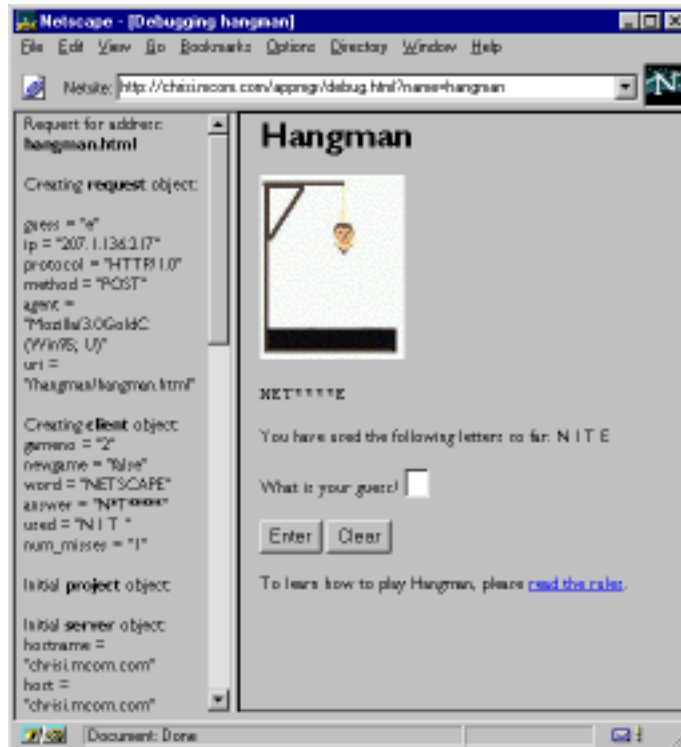

Using Debug URLs

Instead of using the Application Manager, you may find it more convenient to use an application's debug URL. To display an application's trace utility in a separate window, enter the following URL:

```
http://server.domain/appmgr/trace.html?name=appName
```

Here, *appName* is the name of the application. To display the trace utility in the same window as the application (but in a separate frame), enter this URL:

```
http://server.domain/appmgr/debug.html?name=appName
```

You cannot use these two URLs unless you have access privileges to run the Application Manager. You may want to bookmark the debug URL for convenience during development.

Using the debug Function

You can use the `debug` function in your JavaScript application to help trace problems with the application. The `debug` function displays values to the application trace utility. For example, the following statement displays the value of the `guess` property of the `request` object in the trace window along with some identifying text:

```
debug ("Current Guess is ", request.guess);
```

Deploying an Application

After you have finished developing and testing your application, you are ready to deploy it so that it is available to its intended users. This involves two steps:

- moving the application from the development server to the deployment (production) server that is accessible to end users

- applying or changing access restrictions to the application, as appropriate

You should move the application web file to the deployment server, along with any images and uncompiled HTML and JavaScript files that are needed. For more information on how to deploy your application files, see the *Web Publisher User's Guide*.

NOTE

In general, for security reasons, you should not deploy source files.

Depending on the application, you might want to restrict access to certain groups or individuals. In some cases, you might want anyone to be able to run the application; in these cases you don't need to apply any restrictions at all. If the application displays sensitive information or provides access to the server file system, you should restrict access to authorized users who have the proper user name and password.

You restrict access to an application by applying a server configuration style from your Server Manager. For information on using Server Manager and configuration styles, see the *iPlanet Web Server Administrator's Guide*.

Application Manager Details

This section shows how to change default settings for the Application Manager. In addition, it talks about the format of the underlying file in which the Application Manager stores information.

Configuring Default Settings

To configure default settings for the Application Manager, click **Configure** (in Enterprise Server 3.x) or **Preferences** (in iPlanet Web Server 4.1) in the Application Manager's top frame. In response, the Application Manager displays the form shown in Figure 3-6.

You can specify these default values:

- *Web File Path*: A default directory path for your development area.
- *Default Page*: A default name for the default page of a new application.
- *Initial Page*: A default name for the initial page of a new application.

- *Built-in Maximum Database Connections:* A default value for the maximum number of database connections you can make for the predefined database object. (This is provided for backward compatibility with applications that use database objects; for new applications that use a `dbpool` object, ignore this field. See “Database Connection Pools,” on page 202 for how to set this parameter for a `dbpool` object.)
- *External Libraries:* A default directory path for native executables libraries.
- *Client Object Maintenance:* A default maintenance technique for the `client` object properties.

When you install a new application, the default installation fields are used for the initial settings.


Figure 3-6 Default Settings form

The screenshot shows the 'Default Application Settings' form within the 'Server Side JavaScript Application Manager' interface. The form is titled 'Default Values When Adding Applications' and contains the following fields:

- Web File Path:** A text input field.
- Default Page:** A text input field.
- Initial Page:** A text input field.
- Built-in Maximum Database Connections:** A text input field containing the value '1'.
- External Libraries:** A large text area for specifying library paths.
- Client Object Maintenance:** A dropdown menu currently set to 'client-cookie'.

In addition, you can specify these preferences, shown in Figure 3-7:

- *Confirm on:* Whether you are prompted to confirm your action when you remove, start, stop, or restart an application.
- *Debug Output:* Whether, when debugging an application, the application trace appears in the same window as the application but in another frame, or in a window separate from the application.

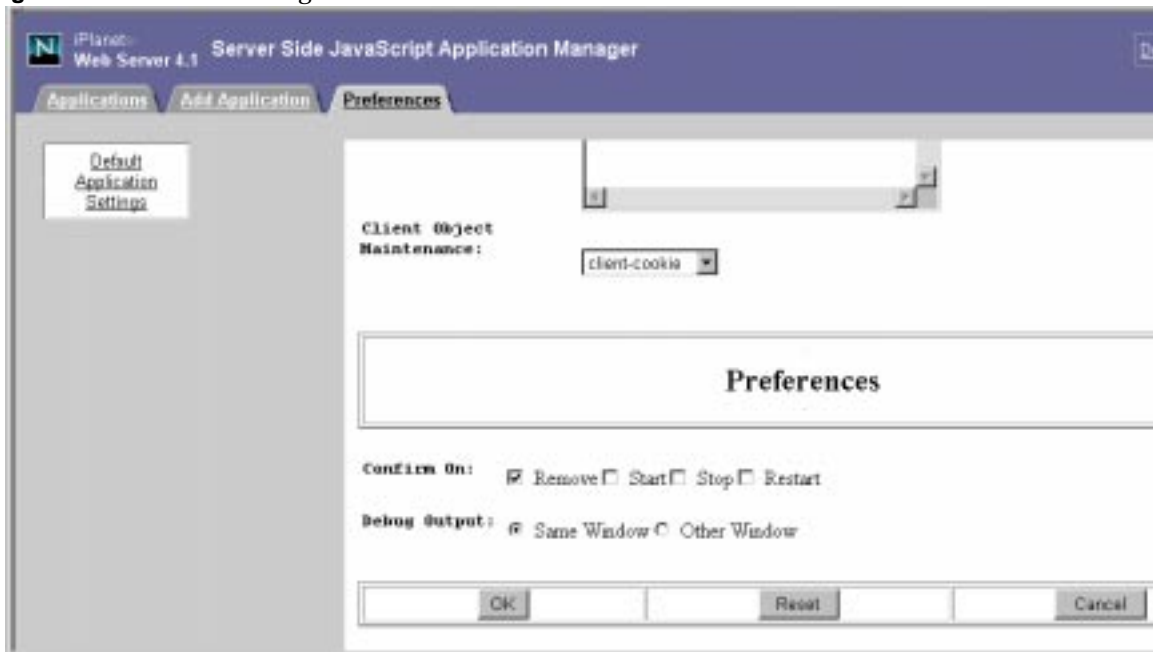Figure 3-7 Default Settings form with Preferences shown

Under the Hood

The Application Manager is a convenient interface for modifying the configuration file `$NSHOME\https-serverID\config\jsa.conf`, where `$NSHOME` is the directory in which you installed the server and `serverID` is the server's ID. In case of catastrophic errors, you may need to edit this file yourself. In general, this is not recommended, but the information is provided here for troubleshooting purposes.

Each line in `jsa.conf` corresponds to an application. The first item on each line is the application name. The remaining items are in the format `name=value`, where `name` is the name of the installation field, and `value` is its value. The possible values for `name` are:

- `uri`: the application name portion of the base application URL
- `object`: path to the application web file
- `home`: application default page
- `start`: application initial page

- `maxdbconnect`: default maximum number of database connections allowed for the predefined database object. (This is provided for backward compatibility with applications that use database objects; for new applications that use a `dbpool` object, ignore this field. See “Database Connection Pools” for how to set this parameter for a `dbpool` object.)
- `library`: paths to external libraries, separated by commas or semicolons
- `client-mode`: technique for maintaining the `client` object

The `jsa.conf` file is limited to 1024 lines, and each line is limited to 1024 characters. If the fields entered in the Application Manager cause a line to exceed this limit, the line is truncated. This usually results in loss of the last item, external library files. If this occurs, reduce the number of external libraries entered for the application, and add the libraries to other applications. Because installed libraries are accessible to all applications, the application can still use them.

A line that starts with `#` indicates a comment. That entire line is ignored. You can also include empty lines in the file.

Do not include multiple lines specifying the same application name. Doing so causes errors in the Application Manager.

Server-Side JavaScript Features

Quick Start with the Sample Applications

Basics of Server-Side JavaScript

Session Management Service

Other JavaScript Functionality

Quick Start with the Sample Applications

This chapter describes the sample server-side JavaScript applications that ship with Netscape web servers. It introduces using server-side JavaScript by working with two of the simpler sample applications.

This chapter contains the following sections:

- About Server-Side JavaScript Sample Applications
- Hello World
- Hangman

About Server-Side JavaScript Sample Applications

When you install a Netscape web server, several sample JavaScript applications are also installed. For an introduction to the full capabilities of JavaScript applications, run them and browse their source code. You can also modify these applications as you learn about JavaScript's capabilities. Both the source files and the application executables for these applications are installed in the `$NSHOME\plugins\samples\js` directory, where `$NSHOME` is the directory in which you installed the server.

The following table lists the sample applications.

Table 4-1 Sample JavaScript applications

Basic concepts	
world	“Hello World” application.

Table 4-1 Sample JavaScript applications (Continued)

hangman	The word-guessing game.
cipher	Word game that has the player guess a cipher.
LiveWire Database Service ¹	
dbadmin	Simple interactive SQL access using LiveWire. If you have restricted access to the Application Manager, this sample is also protected with the server administrator's user name and password. The Maximum Database Connections field for this application modifies a <code>dbpool</code> object.
videoapp	Complete video store application using a relational database of videos.
LiveConnect	
bugbase	Simple bug entry sample using LiveConnect.
Other sample applications	
sendmail	Demonstrates the ability to send email messages from your JavaScript application.
viewer	Allows you to view files on the server, using JavaScript's <code>File</code> class. For security reasons this application is not automatically installed with the Netscape server. If you install it, be sure to restrict access. Otherwise, unauthorized persons may be able to read and write files on your server. For information on restricting access to an application, see the administrator's guide for your web server.
jsacall	Sample using external native libraries and providing access to CGI variables.

1. These sample applications work only if you have a supported database server installed on your network and have configured the client software correctly. For more information, see Chapter 10, "Configuring Your Database." These applications are discussed in Chapter 13, "Videoapp Sample Application." Before using `videoapp`, follow the instructions to set them up found in that chapter.

NOTE

In addition to sample applications, the `$NSHOME\plugins\samples\js` directory also contains an application named `metadata`. This application is used by Visual JavaScript. While you are welcome to browse its source code, do not modify the executable.

The rest of this chapter walks you through two of the simpler samples, giving you a feel for working with JavaScript applications. For now, don't worry about any of the details. This discussion is intended only to give you a rough idea of the capabilities of JavaScript applications. Details are discussed in later chapters.

Chapter 13, "Videoapp Sample Application" discusses the `videoapp` application in detail. You should read that chapter when you're ready to start working with the LiveWire Database Service.

Hello World

In this section, you run Hello World, the simplest sample application, and get an introduction to the following procedures:

- Reading JavaScript source files
- Embedding JavaScript in HTML
- Building and restarting an application

To get started with the sample applications, you need to access the JavaScript Application Manager. You can do so by loading the following URL in Navigator:

```
http://server.domain/appmgr
```

In this and other URLs throughout this manual, *server* represents the name of the server on which you run your application, such as `research1` or `www`, and *domain* represents your Internet domain name, such as `netscape.com` or `uiuc.edu`. If your server has Secure Sockets Layer (SSL) enabled, use `https` instead of `http` in the URL.

In the Application Manager, select `world` in the left frame and click the Run button. Alternatively, you can enter the application URL in the Navigator Location field:

```
http://server.domain/world
```

In response, the Application Manager displays the page shown in Figure 4-1.

Figure 4-1 Hello World



For more information on the Application Manager, see Chapter 3, “Mechanics of Developing JavaScript Applications.”

What Hello World Does

This application illustrates two important capabilities: maintaining a distinct client state for multiple clients and maintaining a persistent application state. Specifically, it performs these functions:

- Displays the IP address of the client accessing it
- Displays the names entered previously and provides a simple form for the user to enter a name
- Displays the number of times the user has previously accessed the page and the total number of times the page has been accessed by anyone

The first time a user accesses this page, the values for both names are not defined. The number of times the user has previously accessed the page is 0; the total number of times it has been accessed is 0.

Type your name and click Enter. The page now shows the name you entered following the text “This time you are.” Both numbers of accesses have been incremented. This action illustrates simple form processing. Enter another name and click Enter. The page now shows the new name following the text “This time you are” and the previous name following the text “Last time you were.” Again, both numbers of accesses have been incremented.

If you access the application from another instance of the Navigator (or from another computer), the page displays the total number of accesses and the number of accesses by each instance of Navigator, not just by that particular instance.

Looking at the Source Script

Now take a look at the JavaScript source script for this application. Using your favorite text editor, open the file `$NSHOME\plugins\samples\js\world\hello.html`, where `$NSHOME` is the directory in which you installed the Netscape server. The file begins with some typical HTML:

```
<html>
<head>
<title> Hello World </title>
</head>
<body>
<h1> Hello World </h1>
<p>Your IP address is <server>write(request.ip);</server>
```

The `SERVER` tags in the bottom line enclose JavaScript code that is executed on the server. In this case, the statement `write(request.ip)` displays the `ip` property of the `request` object (the IP address of the client accessing the page). The `write` function is very important in server-side JavaScript applications, because you use it to add the values of JavaScript expressions to the HTML page sent to the client.

The `request` object is part of the JavaScript Session Management Service. For a full description of it, see Chapter 6, “Session Management Service.” The `write` function is one of the functions JavaScript defines that is not associated with a specific object. For information on the `write` function, see “Constructing the HTML Page.”

Then come some statements you shouldn’t worry about quite yet. These are the next statements of interest:

```
<server> client.oldname = request.newname;</server>
```

This statement assigns the value of the `newname` property of the `request` object to the `oldname` property of the `client` object. The `client` object is also part of the JavaScript Session Management Service. For a full description of it, see Chapter 6, “Session Management Service.” For now, just realize that `client` can hold information about an application specific to a particular browser running that application.

The value of `request.newname` is set when a user enters a value in the form. Later in the file you’ll find these form statements:

```
<form method="post" action="hello.html">
<input type="text" name="newname" size="20">
```

The value of the form’s `ACTION` attribute is `hello.html` (the current filename). This means that when the user submits the form by clicking Enter or pressing the Enter key, Navigator reloads the current page. In general, `ACTION` can be any page in a JavaScript application.

The value of the `NAME` attribute of the text field is `newname`. When the page is submitted, this statement assigns whatever the user has entered in the text field to the `newname` property of the `request` object, referred to in JavaScript as `request.newname`. The values of form elements always correspond to properties of the `request` object. Properties of the `request` object last only for a single client request.

A few lines down, there is another `SERVER` tag, indicating that the following lines are server-side JavaScript statements. Here is the first group of statements:

```
if (client.number == null)
    client.number = 0
else
    client.number = 1 + parseInt (client.number, 10)
```

This conditional statement checks whether the `number` property of the `client` object has been initialized. If not, then the code initializes it to 0; otherwise, it increments `number` by 1 using the JavaScript `parseInt` function, which converts the string value to a number. Because the predefined `client` object converts all property values to strings, you must use `parseInt` or `parseFloat` to convert these values to numbers.

Because `number` is a property of the `client` object, it is distinct for each different client that accesses the application. This value indicates the number of times “you have been here.”

To track the total number of accesses, you use the `project` object, because it is shared by all clients accessing the application. Properties of the `project` object persist until the application is stopped. The next group of statements tracks accesses:

```
project.lock()
if (project.number == null)
    project.number = 0
else
    project.number = 1 + project.number
project.unlock()
```

The first statement uses the `lock` method of the `project` object. This gives the client temporary exclusive access to the `project` object. Another `if` statement checks whether `project.number` has been defined. If not, then the code initializes it to 0; otherwise, the code increments it by 1. Finally, the `unlock` method releases the `project` object so that other clients can access it.

The final statements in the file display the values of `client.number` and `project.number`.

```
<p>You have been here <server>write(client.number);</server>
times.
<br>This page has been accessed <server>write(project.number);
</server> times.
```

Modifying Hello World

In this section, you modify, recompile, and restart this sample application. To edit the source file, you must first determine where it is. In case you don't remember, the Application Manager shows the directory path of the application executable (the file that has the suffix `.web`). The source file, `hello.html`, should be in the same directory. Edit the file with your favorite text editor. The HTML file starts with these statements:

```
<html>
<head> <title> Hello World </title> </head>
<body>
<h1> Hello World </h1>
<p>Your IP address is <server>write(request.ip);</server>
<server>
write ("<P>Last time you were " + client.oldname + ".");
</server>
<p>This time you are <server>write(request.newname);</server>
<server>client.oldname = request.newname; </server>
```

Add a line that displays the type of browser the user has:

```
<p>You are using <server>write(request.agent)</server>
```

If you want, you can also personalize the heading of the page; for example, you could make the title "Fred's Hello World."

When you've finished modifying the file, run the JavaScript application compiler. At the command prompt, change to the directory containing the source code. Type this line at the command prompt to compile the application:

```
jsac -v -o hello.web hello.html
```

Alternatively, from that directory you can run the `build` script (for Unix) or `build.bat` script (for NT). In either case, the compiler starts and displays messages. The final message should be “Compiled and linked successfully.”

Publish the application’s files on your development server. To restart, access the Application Manager, select Hello World, then choose Restart. This loads the newly compiled version of the application into the server. You can then run the application by choosing Run. A window opens with Hello World. You see the changes you made to the application.

Hangman

In this section, you run and modify the Hangman sample application and get an introduction to:

- Using a JavaScript-only source file
- Correcting compile-time errors
- Using the trace utility for runtime debugging

Hangman is a classic word game in which the players try to guess a secret word. The unknown letters in the word are displayed on the screen as asterisks; the asterisks are replaced as a player guesses the correct letters. When the guess is incorrect, one more part of the hanged man is drawn. The game also shows the incorrect letters you have guessed.


When the hanged man is completely drawn, the player loses the game. The player wins by guessing all the letters in the word before the man is hanged. In this simple version of the game, there are only three possible secret words. After a game, the player can choose to play again (and use the next secret word) or quit.

Run the Hangman application by selecting Hangman in the Application Manager and clicking Run. Alternatively, you can load the application URL in Navigator:

`http://server.domain/hangman`

In response, the Application Manager displays the page shown in the following figure.

Figure 4-2 Hangman

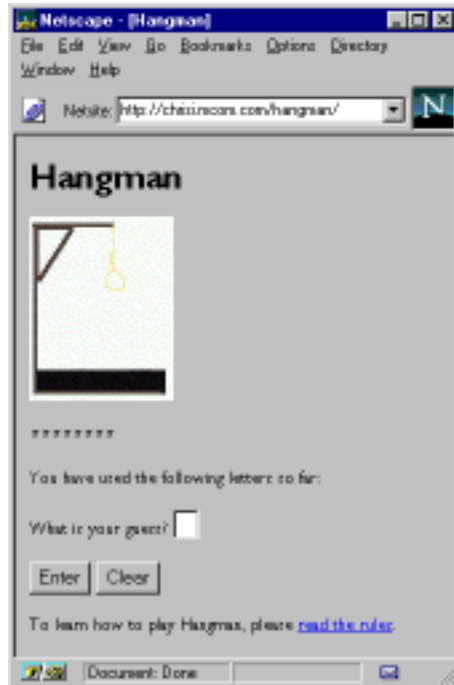

Play the game to get a feel for it.

Looking at the Source Files

The following table shows the sources files for Hangman.

Table 4-2 Hangman source files

hangman.html	The main page for the application. This page is installed as the default page for Hangman in the Application Manager. It is displayed if the user enters just the hangman URL, with no specific page.
hangman.js	A file containing only server-side JavaScript functions used in hangman.html.

Table 4-2 Hangman source files (Continued)

youwon.html youlost.html thanks.html	The pages displayed when a player wins, loses, and finishes playing the game, respectively.
images directory	Contains the Hangman images, hang0.gif, hang1.gif, and so on.
rules.html	Contains text explaining the game. This file is not compiled with the application; it is included as an example of an uncompiled application page that is part of the same site.

Most of the application logic is in `hangman.html`. The basic logic is simple:

1. For a new game, initialize the secret word and other variables.
2. If the player correctly guessed a letter, substitute it into the answer.
3. If the guess was wrong, increment the number of wrong (missed) guesses.
4. Check whether the user has won or lost.
5. Draw the current version of the hanged man, using a GIF image based on the number of wrong guesses.

The body of the HTML file `hangman.html` starts with some JavaScript code inside a `SERVER` tag. First comes code to initialize a new game:

```

if (client.gameno == null) {
    client.gameno = 1;
    client.newgame = "true";
}
if (client.newgame == "true") {
    if (client.gameno % 3 == 1)
        client.word = "LIVEWIRE";
    if (client.gameno % 3 == 2)
        client.word = "NETSCAPE";
    if (client.gameno % 3 == 0)
        client.word = "JAVASCRIPT";
    client.answer = InitAnswer(client.word);
    client.used = "";
    client.num_misses = 0;
}
client.newgame = "false";

```

This code makes extensive use of the `client` object to store information about this client playing the game. Because there is no state that needs to be saved between uses of this same application by different clients, the code doesn't use the `project` or `server` objects.

The first statement determines whether the player has played before, by checking if `client.gameno` exists; if not, the code initializes it to 1 and sets `client.newgame` to `true`. Then, some simple logic assigns the "secret word" to `client.word`; there are just three secret words that players cycle through as they play the game. The `client.gameno` property keeps track of how many times a particular player has played. The final part of initialization uses `InitAnswer`, a function defined in `hangman.js`, to initialize `client.answer` to a string of asterisks.

Then comes a block of statements to process the player's guess:

```
if (request.guess != null) {
    request.guess = request.guess.toUpperCase().substring(0,1);
    client.used = client.used + request.guess + " ";
    request.old_answer = client.answer;
    client.answer = Substitute (request.guess, client.word,
    client.answer);
    if (request.old_answer == client.answer)
        client.num_misses = parseInt(client.num_misses) + 1;
}
```

The `if` statement determines whether the player has made a guess (entered a letter in the form field). If so, the code calls `Substitute` (another function defined in `hangman.js`) to substitute the guessed letter into `client.answer`. This makes `client.answer` the answer so far (for example, "N*T**AP*").

The second `if` statement checks whether `client.answer` has changed since the last guess; if not, then the code increments `client.num_misses` to keep track of the number of incorrect guesses. You must always use `parseInt` to work with integer property values of the predefined `client` object.

As shown in the following code, the final `if` statement in the JavaScript code checks whether the player has won or lost, and redirects the client accordingly. The `redirect` function opens the specified HTML file and passes control to it.

```
if (client.answer == client.word)
    redirect(addClient("youwon.html"));
else if (client.num_misses > 6)
    redirect(addClient("youlost.html"));
```

This is the end of the initial `SERVER` tag. HTML, augmented with more JavaScript expressions, begins. The hanged man is drawn by using a backquoted JavaScript expression inside an HTML `IMG` tag:

```
<IMG SRC=`"images\hang" + client.num_misses + ".gif"`>
```

The entire expression between the two backquotes (```) is a JavaScript string. It consists of the string literal `images\hang` concatenated with the value of `client.num_misses` (which represents an integer but is stored as a string), concatenated with the string literal `.gif`. There are six GIF files containing the hanged man in different stages of completion: `image0.gif`, `image1.gif`, and so on. The backquoted JavaScript generates HTML of the form:

```
<IMG SRC="images\hang0.gif">
```

These lines follow:

```
<PRE><SERVER>write(client.answer)</SERVER></PRE>
You have used the following letters so far:
<SERVER>write(client.used)</SERVER>
```

They display the value of `client.answer` (the word containing all the correctly guessed letters) and all the guessed letters.


The remainder of the file consists of standard HTML. One important thing to notice is that the `ACTION` attribute of the `FORM` tag specifies `hangman.html` as the URL to which to submit the form. That means when you submit the form, the page is reloaded with the specified form values.

Examine `hangman.js`, an example of a server-side JavaScript-only source file. It defines two functions, `InitAnswer` and `Substitute`, used in the application. Notice that you do not use `SERVER` tags in a JavaScript-only file.

Debugging Hangman

You can experiment more with JavaScript to get a feel for developing applications. One important task to master is debugging. In the Application Manager, select Hangman and choose Debug. The Application Manager opens a window with the application in one frame and debugging information in a narrow frame along the left side of the window, as shown in Figure 4-3.

Figure 4-3 Debugging Hangman

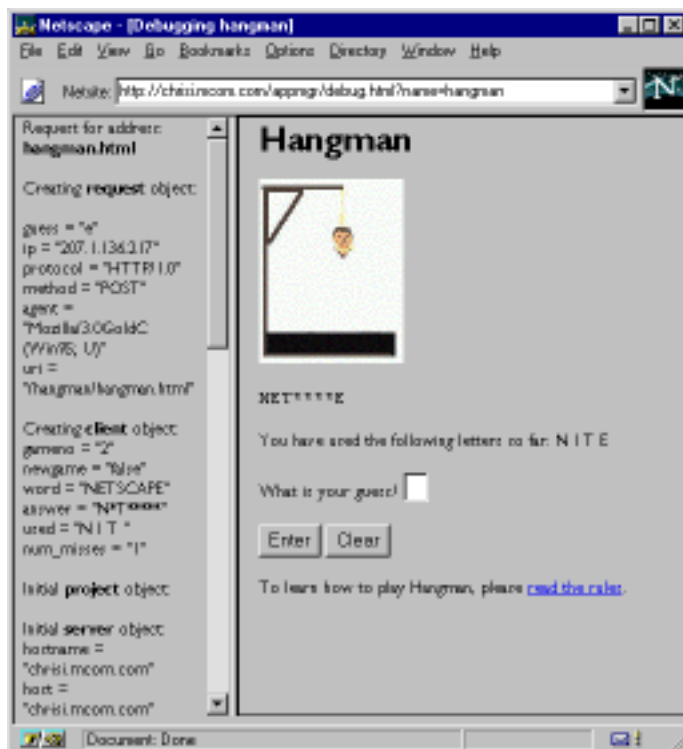

Notice that the URL is

`http://server.domain/appmgr/debug.html?name=hangman`

You can add a bookmark for this URL as a convenience while you work on Hangman. Then you don't have to go through the Application Manager.

Try adding a function to Hangman verifying that a player's guess is a letter (not a number or punctuation mark). You can use the function `InitAnswer` defined in `hangman.js` as a starting point. After compiling and restarting the application, use your bookmark to run the application in debug mode.

Hangman

Basics of Server-Side JavaScript

This chapter describes the basics of server-side JavaScript. It introduces server-side functionality and the differences between client-side and server-side JavaScript. The chapter describes how to embed server-side JavaScript in HTML files. It discusses what happens at runtime on the client and on the server, so that you can understand what to do when. The chapter describes how you use JavaScript to change the HTML page sent to the client and, finally, how to share information between the client and server processes.

This chapter contains the following sections:

- What to Do Where
- Overview of Runtime Processing
- Server-Side Language Overview
- Embedding JavaScript in HTML
- Runtime Processing on the Server
- Constructing the HTML Page
- Accessing CGI Variables
- Communicating Between Server and Client
- Garbage Collection
- Error Handling in Server-Side JavaScript

Server-side JavaScript contains the same core language as the client-side JavaScript with which you may already be familiar. The tasks you perform when running JavaScript on a server are quite different from those you perform when running JavaScript on a client. The different environments and tasks call for different objects.

What to Do Where

The client (browser) environment provides the front end to an application. In this environment, for example, you display HTML pages in windows and maintain browser session histories of HTML pages displayed during a session. The objects in this environment, therefore, must be able to manipulate pages, windows, and histories.

By contrast, in the server environment you work with the resources on the server. For example, you can connect to relational databases, share information across users of an application, or manipulate the server's file system. The objects in this environment must be able to manipulate relational databases and server file systems.

In addition, an HTML page is not displayed on the server. It is retrieved from the server to be displayed on the client. The page retrieved can contain client-side JavaScript. If the requested page is part of a JavaScript application, the server may generate this page on the fly.

In developing a JavaScript application, keep in mind the differences between client and server platforms. They are compared in the following table.

Table 5-1 Client and server comparison

Servers	Clients
Servers are usually (though not always) high-performance workstations with fast processors and large storage capacities.	Clients are often (though not always) desktop systems with less processor power and storage capacity.
Servers can become overloaded when accessed by thousands of clients.	Clients are often single-user machines, so it can be advantageous to offload processing to the client.
	Preprocessing data on the client can also reduce bandwidth requirements, if the client application can aggregate data.

There are usually a variety of ways to partition an application between client and server. Some tasks can be performed only on the client or on the server; others can be performed on either. Although there is no definitive way to know what to do where, you can follow these general guidelines:

As a rule of thumb, use client processing (the `SCRIPT` tag) for these tasks:

- Validating user input; that is, checking that values entered in forms are valid
- Prompting a user for confirmation and displaying error or informational dialog boxes
- Performing aggregate calculations (such as sums or averages) or other processing on data retrieved from the server
- Conditionalizing HTML
- Performing other functions that do not require information from the server

Use server processing (the `SERVER` tag) for these tasks:

- Maintaining information through a series of client accesses
- Maintaining data shared among several clients or applications
- Accessing a database or files on the server
- Calling external libraries on the server
- Dynamically customizing Java applets; for example, visualizing data using a Java applet

JavaScript's Session Management Service provides objects to preserve information over time, but client-side JavaScript is more ephemeral. Client-side objects exist only as the user accesses a page. Also, servers can aggregate information from many clients and many applications and can store large amounts of data in databases. It is important to keep these characteristics in mind when partitioning functionality between client and server.

Overview of Runtime Processing


Once you've installed and started a JavaScript application, users can access it. The basic procedure is as follows:

1. A user accesses the application URL with a web browser, such as Netscape Communicator. The web browser sends a client request to the server for a page in the application.

2. If the request is to a page under the application URL, the JavaScript runtime engine running on the server finds information in the web file corresponding to that URL. For details on what happens in this and the next two steps, see “Runtime Processing on the Server.”
3. The runtime engine constructs an HTML page to send to the client in response. It runs the bytecodes associated with `SERVER` tags from the original source code HTML, creating an HTML page based on those bytecodes and any other HTML found in the original. For information on how you can influence that page that is constructed, see “Constructing the HTML Page.”
4. The runtime engine sends the new HTML page (which may contain client-side JavaScript statements) to the client.
5. The JavaScript runtime engine inside the web browser interprets any client-side JavaScript statements, formats HTML output, and displays results to the user.

Figure 5-1 illustrates this process.

Figure 5-1 Processing a JavaScript page request

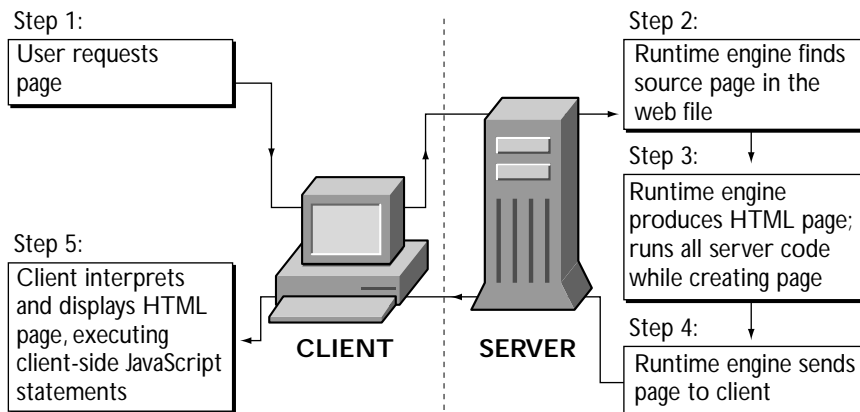

Of course, the user must have Netscape Navigator (or some other JavaScript-capable web browser), for the client to be able to interpret client-side JavaScript statements. Likewise, if you create a page containing server-side JavaScript, it must be installed on a Netscape server to operate properly.

For example, assume the client requests a page with this source:

```
<html>
<head> <title> Add New Customer </title> </head>
<body text="#FFFF00" bgcolor="#C0C0C0"
background="blue_marble.gif">

<br>
<server>
if ( project.lock() ) {
    project.lastID = 1 + project.lastID;
    client.customerID = project.lastID;
    project.unlock();
}
</server>
<h1>Add a New Customer </h1>
<p>Note: <b>All</b> fields are required for the new customer
<form method="post" action="add.htm"></p>
<p>ID:
<br><server>write("<STRONG><FONT COLOR=\"#00FF00\">" +
    project.lastID + "</FONT></STRONG>");</server>
<!-- other html statements -->
</body>
</html>
```

When this page is accessed, the runtime engine on the server executes the code associated with the `SERVER` tags. (The code shown in bold.) If the new customer ID is 42, the server sends this HTML page to the client to be displayed:

```
<html>
<head> <title> Add New Customer </title> </head>
<body text="#FFFF00" bgcolor="#C0C0C0"
background="blue_marble.gif">

<br>
<h1>Add a New Customer </h1>
<p>Note: <b>All</b> fields are required for the new customer
<form method="post" action="add.htm"></p>
<p>ID:
<br><STRONG><FONT COLOR="#00FF00">42</FONT></STRONG>
<!-- other html statements -->
</body>
</html>
```

Server-Side Language Overview

Client-side and server-side JavaScript both implement the JavaScript language. In addition, each adds objects and functions specific to working in the client or the server environment. For example, client-side JavaScript includes the `form` object to represent a form on an HTML page, whereas server-side JavaScript includes the `dbpool` for connecting to an external relational database.

The *Client-Side JavaScript Guide* discusses in detail the core JavaScript language and the additions specific to client-side JavaScript.

ECMA, the European standards organization for standardizing information and communication systems, derived its ECMA-262 standard from the JavaScript language. You can download the standard specification from ECMA's web site at <http://www.ecma.ch>.

Prototypes

As described in the *Server-Side JavaScript Reference*, you can use the `prototype` property of many classes to add new properties to a class and to all of its instances. As described in “Classes and Objects,” server-side JavaScript adds several classes and predefined objects. For the new classes that have the `prototype` property, it works for server-side JavaScript exactly as for client-side JavaScript.

You can use the `prototype` property to add new properties to the `Blob`, `Connection`, `Cursor`, `DbPool`, `File`, `Lock`, `ResultSet`, `SendMail`, and `Stproc` classes.

You cannot use `prototype` with the `client`, `project`, `request`, and `server` objects.

Also, as for client-side JavaScript, you can use the `prototype` property for any class that you define for your application.

Remember that all JavaScript applications on a server run in the same environment. This is why you can share information between clients and applications. One consequence of this, however, is that if you use the `prototype` property to add a new property to any of the

server-side classes added by JavaScript, the new property is available to all applications running on the server, not just the application in which the property was added. This provides you with an easy mechanism for adding functionality to all JavaScript applications on your server.

By contrast, if you add a property to a class you define in your application, that property is available only to the application in which it was created.

Usage

You need to be aware of how the JavaScript application compiler recognizes client-side and server-side JavaScript in an HTML file.

Client-side JavaScript statements can occur in several situations:

- By including them as statements and functions within a `SCRIPT` tag
- By specifying a file as JavaScript source to the `SCRIPT` tag
- By specifying a JavaScript expression as the value of an HTML attribute
- By including statements as event handlers within certain other HTML tags

For detailed information, see the *Client-Side JavaScript Guide*.

Server-side JavaScript statements can occur in these situations:

- By including them as statements and functions within a `SERVER` tag
- By specifying a file as JavaScript source to the JavaScript application compiler
- By specifying a JavaScript expression as the value or name of an HTML attribute

Notice that you cannot specify a server-side JavaScript statement as an event handler. For more information, see “Embedding JavaScript in HTML.”

Environment

The LiveConnect feature of the core JavaScript language works differently on the server than it does on the client. For more information, see Chapter 14, “LiveConnect Overview.”

JavaScript provides additional functionality without the use of objects. You access this functionality through functions not associated with any object (global functions). The core JavaScript language provides the global functions described in the following table (as well as other functions described in the Core JavaScript documentation).

Table 5-2 Core JavaScript global functions

Function	Description
escape	Returns the hexadecimal encoding of an argument in the ISO Latin-1 character set; used to create strings to add to a URL.
unescape	Returns the ASCII string for the specified value; used in parsing a string added to a URL.
isNaN	Evaluates an argument to determine if it is not a number.
parseFloat	Parses a string argument and returns a floating-point number.
parseInt	Parses a string argument and returns an integer.

Server-side JavaScript adds the global functions described in the following table.

Table 5-3 JavaScript server-side global functions

Function	Description
write	Adds statements to the client-side HTML page being generated. (See “Generating HTML.”)
flush	Flushes the output buffer. (See “Flushing the Output Buffer.”)
redirect	Redirects the client to the specified URL. (See “Changing to a New Client Request.”)

Table 5-3 JavaScript server-side global functions (Continued)

Function	Description
<code>getOptionValue</code>	Gets values of individual options in an HTML <code>SELECT</code> form element. (See “Using Select Lists.”)
<code>getOptionValueCount</code>	Gets the number of options in an HTML <code>SELECT</code> form element. (See “Using Select Lists.”)
<code>debug</code>	Displays values of expressions in the trace window or frame. (See “Using the debug Function.”)
<code>addClient</code>	Appends client information to URLs. (See “Manually Appending client Properties to URLs.”)
<code>registerCFunction</code>	Registers a native function for use in server-side JavaScript. (See “Registering Native Functions.”)
<code>callC</code>	Calls a native function. (See “Using Native Functions in JavaScript.”)
<code>deleteResponseHeader</code>	Removes information from the <code>s</code> sent to the client. (See “Request and Response Manipulation.”)
<code>addResponseHeader</code>	Adds new information to the response header sent to the client. (See “Request and Response Manipulation.”)
<code>ssjs_getClientID</code>	Returns the identifier for the <code>client</code> object used by some of JavaScript’s client-maintenance techniques. (See “Uniquely Referring to the client Object.”)
<code>ssjs_generateClientID</code>	Returns an identifier you can use to uniquely specify the <code>client</code> object. (See “Uniquely Referring to the client Object.”)
<code>ssjs_getCGIVariable</code>	Returns the value of the specified CGI environment variable. (See “Accessing CGI Variables.”)

Classes and Objects

To support the different tasks you perform on each side, JavaScript has classes and predefined objects that work on the client but not on the server and other classes and predefined objects that work on the server but not on the client.

NOTE

These names of these objects are reserved for JavaScript. Do not create your own objects using any of these names.

The core JavaScript language provides the classes described in the following table. For details of all of these objects, see the *Server-Side JavaScript Reference*.

Table 5-4 Core JavaScript classes

Class	Description
Array	Represents an array.
Boolean	Represents a Boolean value.
Date	Represents a date.
Function	Specifies a string of JavaScript code to be compiled as a function.
Math	Provides basic math constants and functions; for example, its <code>PI</code> property contains the value of pi.
Number	Represents primitive numeric values.
Object	Contains the base functionality shared by all JavaScript objects.
Packages	Represents a Java package in JavaScript. Used with LiveConnect.
String	Represents a JavaScript string.

Server-side JavaScript includes the core classes, but not classes added by client-side JavaScript. Server-side JavaScript has its own set of additional classes to support needed functionality, as described in the following table.

Table 5-5 Server-side JavaScript classes

Class	Description
Connection	Represents a single database connection from a pool of connections. (See “Individual Database Connections.”)
Cursor	Represents a database cursor. (See “Manipulating Query Results with Cursors.”)
DbPool	Represents a pool of database connections. (See “Database Connection Pools.”)
Stproc	Represents a database stored procedure. (See “Calling Stored Procedures.”)
ResultSet	Represents the information returned by a database stored procedure. (See “Calling Stored Procedures.”)

Table 5-5 Server-side JavaScript classes (Continued)

Class	Description
File	Provides access to the server's file system. (See "File System Service.")
Lock	Provides functionality for safely sharing data among requests, clients, and applications. (See "Sharing Objects Safely with Locking.")
SendMail	Provides functionality for sending electronic mail from your JavaScript application. (See "Mail Service.")

In addition, server-side JavaScript has the predefined objects described in the following table. These objects are all available for each HTTP request. You cannot create additional instances of any of these objects.

Table 5-6 Server-side JavaScript singleton objects

Object	Description
client	Encapsulates information about a client/application pair, allowing that information to last longer than a single HTTP request. (See "The client Object.")
project	Encapsulates information about an application that lasts until the application is stopped on the server. (See "The project Object.")
request	Encapsulates information about a single HTTP request. (See "The request Object.")
server	Encapsulates global information about the server that lasts until the server is stopped. (See "The server Object.")

Embedding JavaScript in HTML

There are two ways to embed server-side JavaScript statements in an HTML page:

- With the `SERVER` tag

Use this tag to enclose a single JavaScript statement or several statements. You precede the JavaScript statements with `<SERVER>` and follow them with `</SERVER>`.

You can intermix the `SERVER` tag with complete HTML statements. Never put the `SERVER` tag between the open bracket (`<`) and close bracket (`>`) of a single HTML tag. (See “The `SERVER` tag.”) Also, do not use the `<SCRIPT>` tag between `<SERVER>` and `</SERVER>`.

- With a backquote (```), also known as a tick

Use this character to enclose a JavaScript expressions inside an HTML tag, typically to generate an HTML attribute or attribute value based on JavaScript values. This technique is useful inside tags such as anchors, images, or form element tags, for example, to provide the value of an anchor’s `HREF` attribute.

Do not use backquotes to enclose JavaScript expressions outside HTML tags. (See “Backquotes.”)

When you embed server-side JavaScript in an HTML page, the JavaScript runtime engine on the server executes the statements it encounters while processing the page. Most statements perform some action on the server, such as opening a database connection or locking a shared object. However, when you use the `write` function in a `SERVER` tag or enclose statements in backquotes, the runtime engine dynamically generates new HTML to modify the page it sends to the client.

The `SERVER` tag

The `SERVER` tag is the most common way to embed server-side JavaScript in an HTML page. You can use the `SERVER` tag in any situation; typically, however, you use backquotes instead if you’re generating attributes names or values for the HTML page.

Most statements between the `<SERVER>` and `</SERVER>` tags do not appear on the HTML page sent to the client. Instead, the statements are executed on the server. However, the output from any calls to the `write` function do appear in the resulting HTML.

The following excerpt from the Hello World sample application illustrates these uses:

```
<P>This time you are
<SERVER>
write(request.newname);
client.oldname = request.newname;
</SERVER>
<h3>Enter your name</h3>
```

When given this code snippet, the runtime engine on the server generates HTML based on the value of `request.newname` in the `write` statement. In the second statement, it simply performs a JavaScript operation, assigning the value of `request.newname` to `client.oldname`. It does not generate any HTML. So, if `request.newname` is "Mr. Ed," the runtime engine generates the following HTML for the previous snippet:

```
<P>This time you are
Mr. Ed
<h3>Enter your name</h3>
```

Backquotes

Use backquotes (```) to enclose server-side JavaScript expressions as substitutes for HTML attribute names or attribute values. JavaScript embedded in HTML with backquotes automatically generates HTML; you do not need to use `write`.

In general, HTML tags are of the form

```
<TAG ATTRIB="value" [...]ATTRIB="value" ]>
```

where *ATTRIB* is an attribute and *value* is its value. The bracketed expression indicates that any number of attribute/value pairs is possible.

When you enclose a JavaScript expression in backquotes to be used as an attribute value, the JavaScript runtime engine automatically adds quotation marks for you around the entire value. You do not provide quotation marks yourself for this purpose, although you may need them to delimit string literals in the expression, as in the example that follows. The runtime engine does not do this for attribute names, because attribute names are not supposed to be enclosed in quotation marks.

For example, consider the following line from the Hangman sample application:

```
<IMG SRC=`"images\hang" + client.num_misses + ".gif"`>
```

This line dynamically generates the name of the image to use based on the value of `client.num_misses`. The backquotes enclose a JavaScript expression that concatenates the string `images\hang` with the integer value of `client.num_misses` and the string `.gif`, producing a string such as `images\hang0.gif`. The result is HTML such as

```
<IMG SRC="images\hang0.gif">
```

The order of the quotation marks is critical. The backquote comes first, indicating that the following value is a JavaScript expression, consisting of a string (`images\hang`), concatenated with an integer (`client.num_misses`), concatenated with another string (`.gif`). JavaScript converts the entire expression to a string and adds the necessary quotation marks around the attribute value.

You need to be careful about using double quotation marks inside backquotes, because the value they enclose is interpreted as a literal value. For this reason, do not surround JavaScript expressions you want evaluated with quotation marks. For example, if the value of `client.val` is `NetHead`, then this statement:

```
<A NAME='client.val'>
```

generates this HTML:

```
<A NAME="NetHead">
```

But this statement:

```
<A NAME=`"client.val"`>
```

generates this HTML:

```
<A NAME="client.val">
```

As another example, two of the `ANCHOR` tag's attributes are `HREF` and `NAME`. `HREF` makes the tag a hyperlink, and `NAME` makes it a named anchor. The following statements use the `choice` variable to set the `attrib` and `val` properties of the `client` object and then create either a hyperlink or a target, depending on those values:

```
<SERVER>
if (choice == "link") {
    client.attrib = "HREF";
    client.val = "http://www.netscape.com";
}
if (choice == "target") {
    client.attrib = "NAME";
    client.val = "NetHead";
}
</SERVER>
<A `client.attrib`=`client.val`>Netscape Communications</A>
```

If the value of `choice` is `link`, the result is

```
<A HREF="http://home.netscape.com">Netscape Communications</A>
```

If the value of choice is target, the result is

```
<A NAME="NetHead">Netscape Communications</A>
```

When to Use Each Technique

In most cases, it is clear when to use the SERVER tag and when to use backquotes. However, sometimes you can achieve the same result either way. In general, it is best to use backquotes to embed JavaScript values inside HTML tags, and to use the SERVER tag elsewhere.

For example, in Hangman, instead of writing

```
<IMG SRC=`"images\hang" + client.num_misses + ".gif"`>
```

you could write

```
<SERVER>
write("<IMG SRC=\"images\hang");
write(client.num_misses);
write(".gif\">");
</SERVER>
```

Notice the backslash that lets you use a quotation mark inside a literal string. Although the resulting HTML is the same, in this case backquotes are preferable because the source is easier to read and edit.

Runtime Processing on the Server

“Overview of Runtime Processing” gives an overview of what happens at runtime when a single user accesses a page in a JavaScript application. This section provides more details about steps 2 through 4 of this process, so you can better see what happens at each stage. This description provides a context for understanding what you can do on the client and on the server.

One of the most important things to remember when thinking about JavaScript applications is the asynchronous nature of processing on the Web. JavaScript applications are designed to be used by many people at the same time. The JavaScript runtime engine on the server handles requests from many different users as they come in and processes them in the order received.

Unlike a traditional application that is run by a single user on a single machine, your application must support the interleaving of multiple simultaneous users. In fact, since each frame in an HTML document with multiple frames generates its own request, what might seem to be a single request to the end user can appear as several requests to the runtime engine.

HTTP (Hypertext Transfer Protocol) is the protocol by which an HTML page is sent to a client. This protocol is *stateless*, that is, information is not preserved between requests. In general, any information needed to process an HTTP request needs to be sent with the request. This poses problems for many applications. How do you share information between different users of an application or even between different requests by the same user? JavaScript’s Session Management Service was designed to help with this problem. This service is discussed in detail in Chapter 6, “Session Management Service.” For now simply remember that the runtime engine automatically maintains the `client`, `server`, `project`, and `request` objects for you.

When the Netscape server receives a client request for an application page, it first performs authorization. This step is part of the basic server administration functions. If the request fails server authorization, then no subsequent steps are performed. If the request receives server authorization, then the JavaScript runtime engine continues. The runtime engine performs these steps, described in the following sections:

1. Constructs a new request object and constructs or restores the client object.
2. Finds the page for the request and starts constructing an HTML page to send to the client.
3. For each piece of the source HTML page, adds to the buffer or executes code.

4. Saves the client object properties.
5. Sends HTML to the client.
6. Destroys the request object and saves or destroys the client object.

Step 1. Construct request object and construct or restore client object

It initializes the built-in properties of the `request` object, such as the request's IP address and any form input elements associated with the request. If the URL for the request specifies other properties, those are initialized for the `request` object, as described in "Encoding Information in a URL."

If the `client` object already exists, the runtime engine retrieves it based on the specified client-maintenance technique. (See "Techniques for Maintaining the client Object.") If no `client` object exists, the runtime engine constructs a new object with no properties.

You cannot count on the order in which these objects are constructed.

Step 2. Find source page and start constructing HTML page

When you compiled your JavaScript application, the source included HTML pages containing server-side JavaScript statements. The main goal of the runtime engine is to construct, from one of those source pages, an HTML page containing only HTML and client-side JavaScript statements. As it creates this HTML page, the runtime engine stores the partially created page in a special area of memory called a buffer until it is time to send the buffered contents to the client.

Step 3. Add to output buffer or execute code

This step is performed for each piece of code on the source page. The details of the effects of various server-side statements are covered in other sections of this manual. For more information, see "Constructing the HTML Page."

For a given request, the runtime engine keeps performing this step until one of these things happens:

- The buffer contains 64KB of HTML.
- In this situation, the runtime engine performs steps 4 and 5 and then returns to step 3 with a newly emptied buffer and continues processing the same request. (Step 4 is only executed once, even if steps 3 and 5 are repeated.)
- The server executes the `flush` function.
- In this situation, the runtime engine performs steps 4 and 5 and then returns to step 3 with a newly emptied buffer and continues processing the same request. (Step 4 is only executed once, even if steps 3 and 5 are repeated.)

- The server executes the `redirect` function.
- In this situation, the runtime engine finishes this request by performing steps 4 through 6. It ignores anything occurring after the `redirect` function in the source file and starts a new request for the page specified in the call to `redirect`.
- It reaches the end of the page.
- In this situation, the runtime engine finishes this request by performing steps 4 through 6.

Step 4. Save client object properties

The runtime engine saves the `client` object's properties immediately before the *first* time it sends part of the HTML page to the client. It only saves these properties once. The runtime engine can repeat steps 3 and 5, but it cannot repeat this step.

The runtime engine saves the properties at this point to support some of the maintenance techniques for the `client` object. For example, the *client URL encoding* scheme sends the `client` properties in the header of the HTML file. Because the header is sent as the first part of the file, the `client` properties must be sent then.

As a consequence, you should be careful of where in your source file you set `client` properties. You should always change `client` properties in the file before any call to `redirect` or `flush` and before generating 64KB of HTML output.

If you change property values for the `client` object in the code after HTML has been sent to the client, those changes remain in effect for the rest of that client request, but they are then discarded. Hence, the next client request does not get those values for the properties; it gets the values that were in effect when content was first sent to the client. For example, assume your code contains these statements:

```
<HTML>
<P>The current customer is
<SERVER>
client.customerName = "Mr. Ed";
write(client.customerName);
client.customerName = "Mr. Bill";
</SERVER>
<P>The current customer really is
<SERVER>
write(client.customerName);
</SERVER>
</HTML>
```

This series of statements results in this HTML being sent to the client:

```
<P>The current customer is Mr. Ed  
<P>The current customer really is Mr. Bill
```

And when the next client request occurs, the value of `client.customerName` is "Mr. Bill". This very similar set of statements results in the same HTML:

```
<HTML>  
<P>The current customer is  
<SERVER>  
client.customerName = "Mr. Ed";  
write(client.customerName);  
flush();  
client.customerName = "Mr. Bill";  
</SERVER>  
<P>The current customer really is  
<SERVER>  
write(client.customerName);  
</SERVER>  
</HTML>
```

However, when the next client request occurs, the value of `client.customerName` is “Mr. Ed”; it is *not* “Mr. Bill”.

For more information, see “Techniques for Maintaining the client Object.”

Step 5. Send HTML to client

The server sends the page content to the client. For pages with no server-side JavaScript statements, the server simply transfers HTML to the client. For other pages, the runtime engine performs the application logic to construct HTML and then sends the generated page to the client.

Step 6. Destroy request object and save or destroy client object

The runtime engine destroys the `request` object constructed for this client request. It saves the values of the `client` object and then destroys the physical JavaScript object. It does not destroy either the `project` or the `server` object.

Constructing the HTML Page

When you compile your JavaScript application, the source includes HTML pages that contain server-side JavaScript statements and perhaps also HTML pages that do not contain server-side JavaScript statements. When a user accesses a page in an application that does not contain server-side JavaScript statements, the server sends the page back as it would any other HTML page. When a user accesses a page that does contain server-side JavaScript statements, the runtime engine on the server constructs an HTML page to send in response, using one of the source pages of your application.

The runtime engine scans the source page. As it encounters HTML statements or client-side JavaScript statements, it appends them to the page being created. As it encounters server-side JavaScript statements, it executes them. Although most server-side JavaScript statements perform processing on the server, some affect the page being constructed. The following sections discuss three functions—`write`, `flush`, and `redirect`—that affect the HTML page served.

Generating HTML

As discussed earlier in this chapter, the `write` function generates HTML based on the value of JavaScript expression given as its argument. For example, consider this statement

```
write("<P>Customer Name is:" + project.custname + ".");
```

In response to this statement, JavaScript generates HTML including a paragraph tag and some text, concatenated with the value of the `custname` property of the `project` object. For example, if this property is “Fred’s software company”, the client would receive the following HTML:

```
<P>Customer Name is: Fred’s software company.
```

As far as the client is concerned, this is normal HTML on the page. However, it is actually generated dynamically by the JavaScript runtime engine.

Flushing the Output Buffer

To improve performance, JavaScript buffers the HTML page it constructs. The `flush` function immediately sends data from the internal buffer to the client. If you do not explicitly call the `flush` function, JavaScript sends data to the client after each 64KB of content in the constructed HTML page.

Don’t confuse the `flush` function with the `flush` method of the `File` class. (For information on using the `File` class to perform file input and output, see “File System Service.”)

You can use `flush` to control the timing of data transfer to the client. For example, you might choose to flush the buffer before an operation that creates a delay, such as a database query. Also, if a database query retrieves a large number of rows, flushing the buffer every few rows prevents long delays in displaying data.

NOTE

If you use the client cookie technique to maintain the properties of the `client` object, you must make all changes to the `client` object before flushing the buffer. For more information, see “Techniques for Maintaining the client Object.”

The following code fragment shows how `flush` is used. Assume that your application needs to perform some action on every customer in your customer database. If you have a lot of customers, this could result in a lengthy delay. So that the user doesn’t have to wait in front of

an unchanging screen, your application could send output to the client before starting the processing and then again after processing each row. To do so, you could use code similar to the following:

```
flush();
conn.beginTransaction();
cursor = conn.cursor ("SELECT * FROM CUSTOMER", true);
while ( cursor.next() ) {
    // ... process the row ...
    flush();
}
conn.commitTransaction();
cursor.close();
```

Changing to a New Client Request

The `redirect` function terminates the current client request and starts another for the specified URL. For example, assume you have this statement:

```
redirect ("http://www.royalairways.com/apps/page2.html");
```

When the runtime engine executes this statement, it terminates the current request. The runtime engine does not continue to process the original page. Therefore any HTML or JavaScript statements that follow the call to `redirect` on the original page are lost. The client immediately loads the indicated page, discarding any previous content.

The parameter to `redirect` can be any server-side JavaScript statement that evaluates to a URL. In this way, you can dynamically generate the URL used in `redirect`. For example, if a page defines a variable `choice`, you can redirect the client to a page based on the value of `choice`, as follows:

```
redirect ("http://www.royalairways.com/apps/page"
+ choice + ".html");
```

If you want to be certain that the current `client` properties are available in the new request, and you're using one of the URL-based maintenance techniques for the `client` object, you should encode the properties in the URL you pass to `redirect`. For information on doing so, see “Manually Appending client Properties to URLs.”

In general, properties of the `request` object and top-level JavaScript variables last only for a single client request. When you redirect to a new page, you may want to maintain some of this information for multiple requests. You can do so by appending the property names and values to the URL, as described in “Encoding Information in a URL.”

Accessing CGI Variables

Like most web servers, Netscape servers set values for a particular set of environment variables, called CGI variables, when setting up the context for running a CGI script. Writers of CGI scripts expect to be able to use these variables in their scripts.

By contrast, Netscape web servers do not set up a separate environment for server-side JavaScript applications. Nevertheless, some of the information typically set in CGI variables can also be useful in JavaScript applications. The runtime engine provides several mechanisms for accessing this information:

- By accessing properties of the predefined `request` object
- By using the `ssjs_getCGIVariable` function to access some CGI variables and other environment variables
- By using the `HTTPHeader` method of `request` to access properties of the client request header

The following table lists properties of the `request` object that correspond to CGI variables. For more information on these properties and on the `request` object in general, see “The request Object.”

Table 5-7 CGI variables accessible as properties of the `request` object

CGI variable	Property	Description
AUTH_TYPE	<code>auth_type</code>	The authorization type, if the request is protected by any type of authorization. Netscape web servers support HTTP basic access authorization. Example value: <code>basic</code>

Table 5-7 CGI variables accessible as properties of the `request` object (Continued)

CGI variable	Property	Description
REMOTE_USER	<code>auth_user</code>	The name of the local HTTP user of the web browser, if HTTP access authorization has been activated for this URL. Note that this is not a way to determine the user name of any person accessing your program. Example value: <code>ksmith</code>
REQUEST_METHOD	<code>method</code>	The HTTP method associated with the request. An application can use this to determine the proper response to a request. Example value: <code>GET</code>
SERVER_PROTOCOL	<code>protocol</code>	The HTTP protocol level supported by the client's software. Example value: <code>HTTP/1.0</code>
QUERY_STRING	<code>query</code>	Information from the requesting HTML page; if "?" is present, the information in the URL that comes after the "?". Example value: <code>x=42</code>

The server-side function `ssjs_getCGIVariable` lets you access the environment variables set in the server process, including the CGI variables listed in the following table.

Table 5-8 CGI variables accessible through `ssjs_getCGIVariable`

Variable	Description
AUTH_TYPE	The authorization type, if the request is protected by any type of authorization. Netscape web servers support HTTP basic access authorization. Example value: <code>basic</code>
HTTPS	If security is active on the server, the value of this variable is <code>ON</code> ; otherwise, it is <code>OFF</code> . Example value: <code>ON</code>
HTTPS_KEYSIZE	The number of bits in the session key used to encrypt the session, if security is on. Example value: <code>128</code>
HTTPS_SECRETKEYSIZE	The number of bits used to generate the server's private key. Example value: <code>128</code>
PATH_INFO	Path information, as sent by the browser. Example value: <code>/cgivars/cgivars.html</code>

Table 5-8 CGI variables accessible through `ssjs_getCGIVariable` (Continued)

Variable	Description
<code>PATH_TRANSLATED</code>	The actual system-specific pathname of the path contained in <code>PATH_INFO</code> . Example value: <code>/usr/ns-home/myhttpd/js/samples/cgivars/cgivars.html</code>
<code>QUERY_STRING</code>	Information from the requesting HTML page; if “?” is present, the information in the URL that comes after the “?”. Example value: <code>x=42</code>
<code>REMOTE_ADDR</code>	The IP address of the host that submitted the request. Example value: <code>198.93.95.47</code>
<code>REMOTE_HOST</code>	If DNS is turned on for the server, the name of the host that submitted the request; otherwise, its IP address. Example value: <code>www.netscape.com</code>
<code>REMOTE_USER</code>	The name of the local HTTP user of the web browser, if HTTP access authorization has been activated for this URL. Note that this is not a way to determine the user name of any person accessing your program. Example value: <code>ksmith</code>
<code>REQUEST_METHOD</code>	The HTTP method associated with the request. An application can use this to determine the proper response to a request. Example value: <code>GET</code>
<code>SCRIPT_NAME</code>	The pathname to this page, as it appears in the URL. Example value: <code>cgivars.html</code>
<code>SERVER_NAME</code>	The hostname or IP address on which the JavaScript application is running, as it appears in the URL. Example value: <code>piccolo.mcom.com</code>
<code>SERVER_PORT</code>	The TCP port on which the server is running. Example value: <code>2020</code>
<code>SERVER_PROTOCOL</code>	The HTTP protocol level supported by the client's software. Example value: <code>HTTP/1.0</code>
<code>SERVER_URL</code>	The URL that the user typed to access this server. Example value: <code>https://piccolo:2020</code>

The syntax of `ssjs_getCGIVariable` is shown here:

```
value = ssjs_getCGIVariable("name");
```


This statement sets the variable `value` to the value of the name CGI variable. If you supply an argument that isn't one of the CGI variables listed in Table 5-8, the runtime engine looks for an environment variable by that name in the server environment. If found, the runtime engine returns the value; otherwise, it returns null. For example, the following code assigns the value of the standard `CLASSPATH` environment variable to the JavaScript variable `classpath`:

```
classpath = ssjs_getCGIVariable("CLASSPATH");
```

The `HTTPHeader` method of `request` returns the header of the current client request. For a CGI script, Netscape web servers set CGI variables for some of the information in the header. For JavaScript applications, you get that information directly from the header. Table 5-9 shows information available as CGI variables in the CGI environment, but as header properties in server-side JavaScript. In header properties, the underlines in the CGI-variable name (`_`) are replaced with dashes (`-`); for example, the CGI variable `CONTENT_LENGTH` corresponds to the header property `content-length`.

Table 5-9 CGI variables accessible through the client header

CGI variable	Description
<code>CONTENT_LENGTH</code>	The number of bytes being sent by the client.
<code>CONTENT_TYPE</code>	The type of data being sent by the client, if a form is submitted with the <code>POST</code> method.
<code>HTTP_ACCEPT</code>	Enumerates the types of data the client can accept.
<code>HTTP_USER_AGENT</code>	Identifies the browser software being used to access your program.
<code>HTTP_IF_MODIFIED_SINCE</code>	A date, set according to GMT standard time, allowing the client to request a response be sent only if the data has been modified since the given date.

For more information on manipulating the client header, see “Request and Response Manipulation.”

The following table shows the CGI variables that are not supported by server-side JavaScript, because they are not applicable when running JavaScript applications.

Table 5-10 CGI variables not supported by server-side JavaScript

Variable	Description
<code>GATEWAY_INTERFACE</code>	The version of CGI running on the server. Not applicable to JavaScript applications.

Table 5-10 CGI variables not supported by server-side JavaScript (Continued)

Variable	Description
SERVER_SOFTWARE	The type of server you are running. Not available to JavaScript applications.

Communicating Between Server and Client

Frequently your JavaScript application needs to communicate information either from the server to the client or from the client to the server. For example, when a user first accesses the `videoapp` application, the application dynamically generates the list of movie categories from the current database contents. That information, generated on the server, needs to be communicated back to the client. Conversely, when the user picks a category from that list, the user's choice must be communicated back to the server so that it can generate the set of movies.

Sending Values from Client to Server

Here are several ways to send information from the client to the server:

- The runtime engine automatically creates properties of the `request` object for each value in an HTML form. (See “Accessing Form Values.”)
- If you're using a URL-based maintenance technique for properties of the `client` object, you can modify the URL sent to the server to include property values for the `client` and `request` objects. (See “Encoding Information in a URL.”)
- You can use cookies to set property values for the `client` and `request` objects. (See “Using Cookies.”)
- On the client, you can modify the header of the client request. You can then use the `HTTPHeader` method of the `request` object to manipulate the header and possibly the body of the request. (See “Request and Response Manipulation.”)

Accessing Form Values

Forms are the bread and butter of a JavaScript application. You use form elements such as text fields and radio buttons as the primary mechanism for transferring data from the client to the server. When the user clicks a Submit button, the browser submits the values entered in the form to the server for processing.

The `ACTION` attribute of the `FORM` tag determines the application to which the values are submitted. To send information to the application on the server, use an application URL as the value of the `ACTION` attribute.

If the document containing the form is a compiled part of the same application, you can simply supply the name of the page instead of a complete URL. For example, here is the `FORM` tag from the Hangman sample application:

```
<FORM METHOD="post" ACTION="hangman.html" >
```

Forms sent to server-side JavaScript applications can use either `get` or `post` as the value of the `METHOD` attribute.

NOTE

Server-side JavaScript applications do not automatically support file upload. That is, if the action specified is a page in a JavaScript application and you submit an `INPUT` element of `TYPE="file"`, your application must manually handle the file, as described in “Request and Response Manipulation.”

Each input element in an HTML form corresponds to a property of the `request` object. The property name is specified by the `NAME` attribute of the form element. For example, the following HTML creates a `request` property called `guess` that accepts a single character in a text field. You refer to this property in server-side JavaScript as `request.guess`.

```
<FORM METHOD="post" ACTION="hangman.html" >
<P>
What is your guess?
<INPUT TYPE="text" NAME="guess" SIZE="1" >
```

A `SELECT` form element that allows multiple selections requires special treatment, because it is a single property that can have multiple values. You can use the `getOptionValue` function to retrieve the values of selected options in a multiple select list. For more information, see “Using Select Lists.”

For more information on the request object, see “The request Object.”

If you want to process data on the client first, you have to create a client-side JavaScript function to perform processing on the form-element values and then assign the output of the client function to a form element. You can hide the element, so that it is not displayed to the user, if you want to perform client preprocessing.

For example, suppose you have a client-side JavaScript function named `calc` that performs calculations based on the user’s input. You want to pass the result of this function to your application for further processing. You first need to define a hidden form element for the result, as follows:

```
<INPUT TYPE="hidden" NAME="result" SIZE=5>
```

Then you need to create an `onClick` event handler for the Submit button that assigns the output of the function to the hidden element:

```
<INPUT TYPE="submit" VALUE="Submit"
      onClick="this.form.result.value=calc(this.form)">
```

The value of `result` is submitted along with any other form-element values. This value can be referenced as `request.result` in the application.

Using Select Lists

The HTML `SELECT` tag, used with the `MULTIPLE` attribute, allows you to associate multiple values with a single form element. If your application requires select lists that allow multiple selected options, you use the `getOptionValue` function to get the values in JavaScript. The syntax of `getOptionValue` is

```
itemValue = getOptionValue(name, index)
```

Here, `name` is the string specified as the `NAME` attribute of the `SELECT` tag, and `index` is the zero-based ordinal index of the selected option. The `getOptionValue` function returns the value of the selected item, as specified by the associated `OPTION` tag.

The function `getOptionValueCount` returns the number of options (specified by `OPTION` tags) in the select list. It requires only one argument, the string containing the name of the `SELECT` tag.

For example, suppose you have the following element in a form:

```
<SELECT NAME="what-to-wear" MULTIPLE SIZE=8>
  <OPTION SELECTED>Jeans
  <OPTION>Wool Sweater
  <OPTION SELECTED>Sweatshirt
  <OPTION SELECTED>Socks
  <OPTION>Leather Jacket
  <OPTION>Boots
  <OPTION>Running Shoes
  <OPTION>Cape
</SELECT>
```

You could process the input from this select list as follows:

```
<SERVER>
var i = 0;
var howmany = getOptionValueCount("what-to-wear");
while ( i < howmany ) {
  var optionValue =
  getOptionValue("what-to-wear", i);
  write ("  
Item #" + i + ": " + optionValue + "\n");
  i++;
}
</SERVER>
```

If the user kept the default selections, this script would return:

```
Item #0: Jeans
Item #1: Sweatshirt
Item #2: Socks
```

Encoding Information in a URL

You can manually encode properties of the `request` object into a URL that accesses a page of your application. In creating the URL, you use the following syntax:

```
URL?varName1=value1[&varName2=value2...]
```

Here, URL is the base URL, each `varNameN` is a property name, and each `valueN` is the corresponding property value (with special characters escaped). In this scheme, the base URL is followed by a question mark (?) which is in turn followed by pairs of property names and their values. Separate each pair with an ampersand (&). When the runtime engine on the server receives the resultant URL as a client request, it creates a `request` property named `varNameN` for each listed variable.

For example, the following HTML defines a hyperlink to a page that instantiates the `request` properties `i` and `j` to 1 and 2, respectively. JavaScript statements in `refpage.html` can then refer to these variables as `request.i` and `request.j`.

```
<A HREF="refpage.html?i=1&j=2">Click Here</A>
```

Instead of using a static URL string, as in the preceding example, you can use server-side or client-side JavaScript statements to dynamically generate the URL that encodes the property values. For example, your application could include a page such as the following:

```
<HTML>
<HEAD>
<SCRIPT>
function compute () {
    // ...replace with an appropriate computation
    // that returns a search string ...
    return "?num=25";
}
</SCRIPT>
</HEAD>
<BODY>
<a HREF="refpage.htm" onClick="this.search=compute()">
Click here to submit a value.</a></p>
</BODY>
</HTML>
```

In this case, when the user clicks the link, the runtime engine on the client runs the `onClick` event handler. This event handler sets the search portion of the URL in the link to whatever string is returned by the `compute` function. When the runtime engine on the server gets this request, it creates a `num` property for the `request` object and sets the value to 25.

As a second example, you might want to add request properties to a URL created in a server-side script. This is most likely to be useful if you'll be redirecting the client request to a new page. To add request properties in a server-side script, you could instead use this statement:

```
<A HREF="refpage.html?i=" + escape(i) + "&j=" + escape(j) ">
  Click Here</A>
```

If you create a URL in a server-side JavaScript statement, the `client` object's properties are not automatically added. If you're using a URL-based maintenance technique for the `client` object, use the `addClient` function to generate the final URL. In this example, the statement would be:

```
<A HREF='addClient("refpage.html?i=" + escape(i)
  + "&j=" + escape(j))'>Click Here</A>
```

For information on using `addClient`, see “Manually Appending client Properties to URLs.”

The core JavaScript `escape` function allows you to encode names or values appended to a URL that may include special characters. In general, if an application needs to generate its own property names and values in a URL request, you should use `escape`, to ensure that all values are interpreted properly. For more information, see the *Server-Side JavaScript Reference*.

Remember that a URL does not change when a user reloads it, although the page's contents may change. Any properties sent in the original URL are restored to their values in the URL as it was first sent, regardless of any changes that may have been made during processing. For example, if the user clicks the Reload button to reload the URL in the previous example, `i` and `j` are again set to 1 and 2, respectively.

Sending Values from Server to Client

A JavaScript application communicates with the client through HTML and client-side JavaScript. If you simply want to display information to the user, there is no subtlety: you create the HTML to format the information as you want it displayed.

However, you may want to send values to client scripts directly. You can do this in a variety of ways, including these three:

- You can set default form values and values for hidden form elements. (See “Default Form Values and Hidden Form Elements.”)

- You can directly substitute information in client-side `SCRIPT` statements or event handlers. (See “Direct Substitution.”)
- You can use cookies to send `client` property values or other values to the client. (See “Using Cookies.”)
- You can modify the header of the response sent to the client, using the `deleteResponseHeader` and `addResponseHeader` functions. (See “Request and Response Manipulation.”)

Default Form Values and Hidden Form Elements

To display an HTML form with default values set in the form elements, use the `INPUT` tag to create the desired form element, substituting a server-side JavaScript expression for the `VALUE` attribute. For example, you can use the following statement to display a text element and set the default value based on the value of `client.custname`:

```
<INPUT TYPE="text" NAME="customerName" SIZE="30"
      VALUE='client.custname'>
```

The initial value of this text field is set to the value of the variable `client.custname`. So, if the value of `client.custname` is `Victoria`, this statement is sent to the client:

```
<INPUT TYPE="text" NAME="customerName" SIZE="30" VALUE="Victoria">
```

You can use a similar technique with hidden form elements if you do not want to display the value to the user, as in this example:

```
<INPUT TYPE="hidden" NAME="custID" SIZE=5 VALUE='client.custID'>
```

In both cases, you can use these values in client-side JavaScript in property values of objects available on the client. If these two elements are in a form named `entryForm`, then these values become the JavaScript properties `document.entryForm.customerName` and

`document.entryForm.custID`, respectively. You can then perform client processing on these values in client-side scripts. For more information, see the *Client-Side JavaScript Guide*.

Direct Substitution

You can also use server-side JavaScript to generate client-side scripts. These values can be used in subsequent statements on the client. As a simple example, you could initialize a client-side variable named `budget` based on the value of `client.amount` as follows:

```
<p>The budget is:  
<SCRIPT>  
<SERVER>  
write("var budget = " + client.amount);  
</SERVER>  
document.write(budget);  
</SCRIPT>
```

If the value of `client.amount` is 50, this would generate the following JavaScript:

```
<p>The budget is:  
<SCRIPT>  
var budget = 50  
document.write(budget);  
</SCRIPT>
```

When run on the client, this appears as follows:

The budget is: 50

Using Cookies

Cookies are a mechanism you can use on the client to maintain information between requests. This information resides in a file called `cookie.txt` (the cookie file) stored on the client machine. The Netscape cookie protocol is described in detail in the *Client-Side JavaScript Guide*.

You can use cookies to send information in both directions, from the client to the server and from the server to the client. Cookies you send from the client become properties of either the `client` object or of the `request` object. Although you can send any string value to the client from the server as a cookie, the simplest method involves sending `client` object properties.

Properties of the client Object as Cookies

If an application uses the client cookie technique to maintain the `client` object, the runtime engine on the server stores the names and values of properties of the `client` object as cookies on the client. For information on using cookies to maintain the `client` object, see “Techniques for Maintaining the client Object.”

For a `client` property called *propName*, the runtime engine automatically creates a cookie named `NETSCAPE_LIVEWIRE.propName`, assuming the application uses the client cookie maintenance technique. The runtime engine encodes property values as required by the Netscape cookie protocol.

To access these cookies in a client-side JavaScript script, you can extract the information using the `document.cookie` property and a function such as the `getSSCookie` function shown here:

```

function getSSCookie(name) {
    var search = "NETSCAPE_LIVEWIRE." + name + "=";
    var retstr = "";
    var offset = 0;
    var end = 0;
    if (document.cookie.length > 0) {
        offset = document.cookie.indexOf(search);
        if (offset != -1) {
            offset += search.length;
            end = document.cookie.indexOf(";", offset);
            if (end == -1)
                end = document.cookie.length;
            retstr = unescape(document.cookie.substring(offset,
end));
        }
    }
    return(retstr)
}

```

The `getSSCookie` function is not a predefined JavaScript function. If you need similar functionality, you must define it for your application.

To send information to the server to become a property of the `client` object, add a cookie whose name is of the form `NETSCAPE_LIVEWIRE.propName`. Assuming your application uses the client cookie maintenance technique, the runtime engine on the server creates a `client` property named `propName` for this cookie.

To do so, you can use a function such as the following:

```

function setSSCookie (name, value, expire) {
    document.cookie =
        "NETSCAPE_LIVEWIRE." + name + "="
        + escape(value)
        + ((expire == null) ? "" : ("; expires=" +
expire.toGMTString()));
}

```

Here, too, the `setSSCookie` function is not a predefined JavaScript function. If you need similar functionality, you must define it for your application.

You can call these functions in client-side JavaScript to get and set property values for the `client` object, as in the following example:

```
var value = getSSCookie ("answer");
if (value == "") {
    var expires = new Date();
    expires.setDate(expires.getDate() + 7);
    setSSCookie ("answer", "42", Expires);
}
else
    document.write ("The answer is ", value);
```

This group of statements checks whether there is a `client` property called `answer`. If not, the code creates it and sets its value to 42; if so, it displays its value.

Other Cookies

When a request is sent to the server for a page in a JavaScript application, the header of the request includes all cookies currently set for the application. You can use the `request.getHeader` method to access these cookies from server-side JavaScript and

assign them to server-side variables. Conversely, you can use the `addResponseHeader` function to add new cookies to the response sent back to the client. This functionality is described in “Request and Response Manipulation.”

On the client, you can use a function such as the following to access a particular cookie:

```
function GetCookie (name) {
    var arg = name + "=";
    var alen = arg.length;
    var clen = document.cookie.length;
    var i = 0;
    while (i < clen) {
        var j = i + alen;
        if (document.cookie.substring(i, j) == arg) {
            var end = document.cookie.indexOf (";", j);
            if (end == -1)
                end = document.cookie.length;
            return unescape(document.cookie.substring(j, end));
        }
        i = document.cookie.indexOf(" ", i) + 1;
        if (i == 0) break;
    }
    return null;
}
```

And you can use a function such as the following to set a cookie on the client:

```
function setCookie (name, value, expires, path, domain, secure) {
    document.cookie =
        name + "="
        + escape(value)
        + ((expires) ? "; expires=" + expires.toGMTString() : "")
        + ((path) ? "; path=" + path : "")
        + ((domain) ? "; domain=" + domain : "")
        + ((secure) ? "; secure" : "");
}
```

If the path you specify for a cookie is in your JavaScript application, then that cookie will be sent in any request sent to the application.

You can use this technique for passing cookie information between the client and the server regardless of the `client` object maintenance technique you use.

Garbage Collection

Server-side JavaScript contains a garbage collector that automatically frees memory allocated to objects no longer in use. Most users do not need to understand the details of the garbage collector. This section gives an overview of the garbage collector and information on when it is invoked.

NOTE

This section provides advanced users with a peek into the internal workings of server-side JavaScript. Netscape does not guarantee that these algorithms will remain the same in future releases.

The JavaScript object space consists of arenas. That is, the JavaScript runtime engine allocates a set of arenas from which it allocates objects. When the runtime engine receives a request for a new object, it first looks on the free list. If the free list has available space, the engine allocates that space. Otherwise, the runtime engine allocates space from the arena currently in use. If all arenas are in use, the runtime engine allocates a new arena. When all the objects from an arena are garbage, the garbage collector frees the arena.

A JavaScript string is typically allocated as a GC object. The string has a reference to the bytes of the string which are also allocated in the process heap. When a string object is garbage collected, the string's bytes are freed.

The JavaScript garbage collector is based on mark and sweep. It does not relocate objects. The garbage collector maintains a root set of objects at all times. This root set includes the JavaScript stack, the global object for the JavaScript context, and any JavaScript objects which

have been explicitly added to the root set. During the mark phase, the garbage collector marks all objects that are reachable from the root set. At the end of this phase, all unmarked objects are garbage. All garbage objects are collected into a free list.

A garbage collection is considered necessary if the number of bytes currently in use is 1.5 times the number of bytes that were in use at the end of the last garbage collection. The runtime engine checks for this condition at the following points and starts the garbage collector if it needs to:

- At the end of every request.
- During a long JavaScript computation after a predetermined number of JavaScript bytecode operations have executed, and only when a branch operation is executed. If you have code with no branch operations, garbage collection won't occur simply because a predetermined number of operations have executed. (A branch operation can be an `if` statement, `while` statement, function call, and so on.)
- When an attempt is made to allocate a new JavaScript object but JavaScript has no available memory and no additional memory can be obtained from the operation system.
- When the `lw_ForceGarbageCollection` function is called.

Error Handling in Server-Side JavaScript

The `ssjs_onError` function, when defined in your application, is called in the event of a server-side JavaScript error such as “undefined variable name.” In a `ssjs_onError` function you can do anything you can do in a server-side JavaScript function, including access the server, project, client and request objects. You can also redirect and call other functions.

The `ssjs_onError` function has the following syntax:

```
function ssjs_onError (<message>,<file>,<line number>)
```

`<message>` is the error message text

`<file>` is the source file name

`<line number>` is the line number of the error

A JavaScript error during the execution of the `onError` function is reported in the error log and the livewire trace (if active). The `ssjs_onError` function is not called recursively, however. An error in the `onError` function causes a report in the error log, but does not launch a call to `onError`.

Here is an example function:

```
function ssjs_onError(msg,file,line)
{
write("<br>\n<hr>")
write("error message: "+msg+"<br>\n")
write("file name: "+file+"<br>\n")
write("line number: "+line+"<br>\n")
write("<hr>")
}
```

NOTE

To give each page its own special `onError` function, add an assignment to `ssjs_onError` at the beginning of the code for the page. For example:

```
ssjs_onError = custom_onError;

function custom_onError(msg,file,line)
{
// ...
}
```

Server-side JavaScript executes whatever `ssjs_onError` represents at the time of the error. You can use a single `ssjs_onError` function that is shared by all pages, or you can dynamically switch to another `onError` function at any time, including at the beginning of each page. If two requests execute the same `onError` function at the same time, they have different execution environments, just as if you are simultaneously executing any other function.

Session Management Service

This chapter describes the Session Management Service objects available in server-side JavaScript for sharing data among multiple client requests to an application, among multiple users of a single application, or even among multiple applications on a server.

The Session Management Service is a set of capabilities that control the construction and destruction of various predefined objects during any server session. These capabilities are provided in the predefined objects `request`, `client`, `project`, and `server`.

In addition, you can construct instances of `Lock` to control access during the sharing of information. `Lock` instances provide you with fine-grained control over information sharing by getting exclusive access to specified objects.

This chapter contains the following sections:


- Overview of the Predefined Objects
- The `request` Object
- The `client` Object
- The `project` Object
- The `server` Object
- Techniques for Maintaining the `client` Object
- Sharing Objects Safely with Locking

Overview of the Predefined Objects

The predefined `request`, `client`, `project`, and `server` objects contain data that persists for different periods and is available to different clients and applications. There is one `server` object shared by all running applications on the server. There is a separate `project` object for each running application. There is one `client` object for each browser (`client`) accessing a

particular application. Finally, there is a separate `request` object for each client request from a particular client to a particular application. Figure 6-1 illustrates the relative availability of the different objects.

Figure 6-1 Relative availability of session-management objects

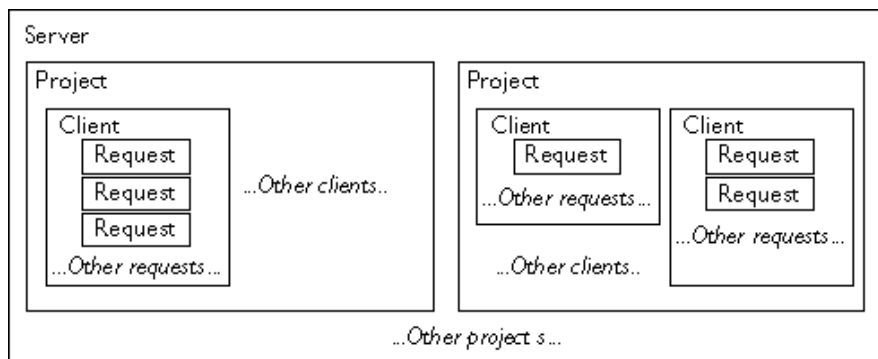

The JavaScript runtime engine on the server constructs session-management objects at different times. These objects are useful for storing a variety of data. You can define application-specific properties for any of these objects.

- `request` object

Contains data available only to the current client request. Nothing else shares this object. The `request` object has predefined properties you can access.

Treat the `request` object almost as a read-only object. The runtime engine stores the current value of all form elements as properties of the `request` object. You can use it to store information specific to a single request, but it is more efficient to use JavaScript variables for this purpose.

The runtime engine constructs a `request` object each time the server responds to a client request from the web browser. It destroys the object at the end of the client request. The runtime engine does not save `request` data at all.

For more details, see “The request Object.”

- `client` object

Contains data available only to an individual client/application pair. If a single client is connected to two different applications at the same time, the JavaScript runtime engine constructs a separate `client` object for each client/application pair. All requests from a single client to the same application share the same `client` object. The `client` object has no predefined properties.

In general, use the `client` object for data that should be shared across multiple requests from the same client (user) but that should not be shared across multiple clients of the application. For example, you can store a user's customer ID as a property of the `client` object.

The runtime engine physically constructs the `client` object for each client request, but properties persist across the lifetime of the client's connection to the application. Therefore, although the physical `client` object exists only for a single client request, conceptually you can think of it as being constructed when the client is first connected to the application, and not destroyed until the client stops accessing the application. There are several approaches to maintaining the properties of the `client` object across multiple requests. For more information, see "Techniques for Maintaining the client Object."

The runtime engine destroys the `client` object when the client has finished using the application. In practice, it is tricky for the JavaScript runtime engine to determine when the `client` object and its properties should be destroyed. For information on how it makes this determination, see "The Lifetime of the client Object." Also, see "The client Object."

- `project` object

Contains data that is available to all clients accessing any part of the application. All clients accessing the same application share the same `project` object. The `project` object has no predefined properties.

In general, use the `project` object to share data among multiple clients accessing the same application. For example, you can store the next available customer ID as a property of the `project` object. When you use the `project` object to share data, you need to be careful about simultaneous access to that data; see "Sharing Objects Safely with Locking." Because of limitations on the `client` object's properties, you sometimes use the `project` object to store data for a single client.

The runtime engine constructs the `project` object when the application is started by the Application Manager or when the server is started. It destroys the object when the application or the server is stopped.

For more details, see "The project Object."

- `server` object

Contains data available to all clients and all applications for the entire server. All applications and all client/application pairs share the same `server` object. The `server` object has predefined properties you can access.


Use the `server` object to share data among multiple applications on the server. For example, you might use the `server` object to track usage of all of the applications on your server. When you use the `server` object to share data, you need to be careful about simultaneous access to that data; see “Sharing Objects Safely with Locking.”

The runtime engine constructs the `server` object when the server is started and destroys the object when the server is stopped.

For more details, see “The server Object.”

It may help to think about how these objects correspond to a URL for a page in your application. Consider Figure 6-2.

Figure 6-2 Predefined objects in a URL

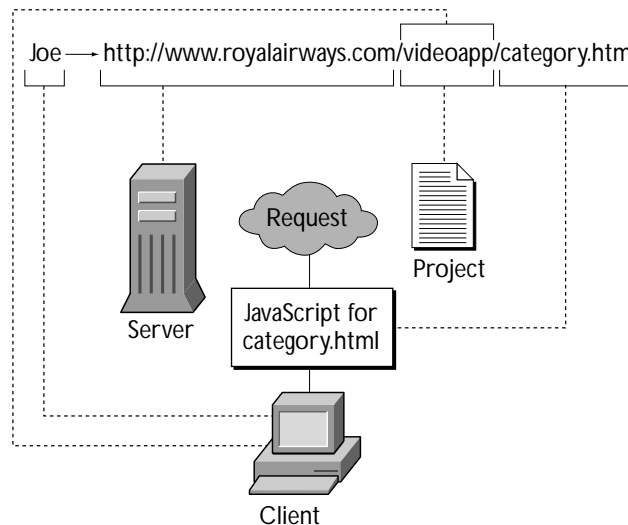

In this illustration, Joe requests the URL `http://www.royalairways.com/videoapp/category.html`, corresponding to a page in the `videoapp` sample application. When the runtime engine receives the request, it uses the already-existing `server` object corresponding to `www.royalairways.com` and the already-existing `project` object corresponding to the `videoapp` application. The engine creates a `client` object corresponding to the combination of Joe and the `videoapp`

application. If Joe has already accessed other pages of this application, this new `client` object uses any stored properties. Finally, the engine creates a new `request` object for the specific request for the `category.html` page.

The request Object

The `request` object contains data specific to the current client request. It has the shortest lifetime of any of the objects. JavaScript constructs a new `request` object for each client request it receives; for example, it creates an object when

- A user manually requests a URL by typing it in or choosing a bookmark.
- A user clicks a hyperlink or otherwise requests a document that refers to another page.
- Client-side JavaScript sets the property `document.location` or navigates to the page using the `history` method.
- Server-side JavaScript calls the `redirect` function.

The JavaScript runtime engine on the server destroys the `request` object when it finishes responding to the request (typically by providing the requested page). Therefore, the typical lifetime of a `request` object can be less than one second.

NOTE

You cannot use the `request` object on your application's initial page. This page is run when the application is started on the server. At this time, there is no client request, and so there is no available `request` object. For more information on initial pages, see "Installing a New Application."

For summary information on the `request` object, see “Overview of the Predefined Objects.”

Properties

The following table lists the predefined properties of the `request` object. Several of these predefined properties correspond to CGI environment variables. You can also access these and other CGI environment variables using the `ssjs_getCGIVariable` function described in “Accessing CGI Variables.”

Table 6-1 Properties of the `request` object

Property	Description	Example value
<code>agent</code>	Name and version of the client software. Use this information to conditionally employ advanced features of certain browsers.	Mozilla/1.1N (Windows; I; 32bit)
<code>auth_type</code>	The authorization type, if this request is protected by any type of authorization. Netscape web servers support HTTP basic access authorization. Corresponds to the CGI <code>AUTH_TYPE</code> environment variable.	basic
<code>auth_user</code>	The name of the local HTTP user of the web browser, if HTTP access authorization has been activated for this URL. Note that this is not a way to determine the user name of any person accessing your program. Corresponds to the CGI <code>REMOTE_USER</code> environment variable.	vpg
<code>ip</code>	The IP address of the client. May be useful to authorize or record access.	198.95.251.3 0
<code>method</code>	The HTTP method associated with the request. An application can use this to determine the proper response to a request. Corresponds to the CGI <code>REQUEST_METHOD</code> environment variable.	GET ¹
<code>protocol</code>	The HTTP protocol level supported by the client’s software. Corresponds to the CGI <code>SERVER_PROTOCOL</code> environment variable.	HTTP/1.0
<code>query</code>	Information from the requesting HTML page; this is information in the URL that comes after the “?”. Corresponds to the CGI <code>QUERY_STRING</code> environment variable.	button1=on&b utton2=off
<code>imageX</code>	The horizontal position of the cursor when the user clicked over an image map. Described in “Working with Image Maps.”	45
<code>imageY</code>	The vertical position of the cursor when the user clicked over an image map. Described in “Working with Image Maps.”	132
<code>uri</code>	The request’s partial URL, with the protocol, host name, and the optional port number stripped out.	videoapp/add .html

1. For HTTP 1.0, method is one of GET, POST, or HEAD.

When you declare top-level variables in server-side JavaScript, they have the same lifetime as request properties. For example, this declaration persists during the current request only:

```
var number = 42;
```

In addition to the predefined properties, you can, in your client code, have information that will become properties of the request object. You do so by using form elements and by encoding properties into the request URL, as described “Sending Values from Client to Server.”

Although you can also create additional properties for request directly in server-side JavaScript statements, performance may be better if you instead use JavaScript variables. The properties of the request object you create can be of any legal JavaScript type, including references to other JavaScript objects.

Remember that the lifetime of the request object and hence of its properties is the duration of the request. If you store a reference to another object in the request object, the referenced object is destroyed at the end of the request along with the request object, unless the referenced object has other live references to it, directly or indirectly from the server or project object.

Working with Image Maps

The ISMAP attribute of the IMG tag indicates a server-based image map. If the user clicks on an image map, the horizontal and vertical positions of the cursor are sent to the server. The imageX and imageY properties return these horizontal and vertical positions. Consider this HTML:

```
<A HREF="mapchoice.html">  
<IMG SRC="images\map.gif" HEIGHT=599 WIDTH=424 BORDER=0  
    ISMAP ALT="SANTA CRUZ COUNTY">  
</A>
```

The page `mapchoice.html` has properties `request.imageX` and `request.imageY` based on the cursor position at the time the user clicked.

The client Object

Many browser clients can access a JavaScript application simultaneously. The `client` object provides a method for dealing with each browser client individually. It also provides a technique for tracking each browser client's progress through an application across multiple requests.

The JavaScript runtime engine on the server constructs a `client` object for every client/application pair. A browser client connected to one application has a different `client` object from the same browser client connected to a different application. The runtime engine constructs a new `client` object each time a user accesses an application; there can be hundreds or thousands of `client` objects active at the same time.

NOTE

You cannot use the `client` object on your application's initial page. This page is run when the application is started on the server. At this time, there is no client request, and so there is no available `client` object. For more information on initial pages, see "Installing a New Application."

The runtime engine constructs and destroys the `client` object for each client request. However, while processing a request, the runtime engine saves the names and values of the `client` object's properties. In this way, the runtime engine can construct a new `client`

object from the saved data when the same user returns to the application with a subsequent request. Thus, conceptually you can think of the `client` object as remaining for the duration of a client's session with the application.

JavaScript does not save `client` objects that have no property values. Therefore, if an application does not need `client` objects and does not assign any `client` object property values, it incurs no additional overhead.

You have several options for how and where the runtime engine saves `client` object properties. These options are discussed in “Techniques for Maintaining the client Object.”

For summary information on the `client` object, see “Overview of the Predefined Objects.”

Properties

There are no predefined property values in the `client` object, because it is intended to contain data specific to the application. JavaScript statements can assign application-specific properties and values to the `client` object. A good example of a `client` object property is a customer ID number. When the user first accesses the application, the application might assign a customer ID, as in the following example:

```
client.custID = getNextCustID();
```

This example uses the application-defined `getNextCustID` function to compute a customer ID. The runtime engine then assigns this ID to the `client` object's `custID` property.

Once the customer ID has been established, it would be inconvenient to require the user to reenter the ID on each page of the application. However, without the `client` object, there would be no way to associate the correct customer ID with subsequent requests from a client.

Because of the techniques used to maintain `client` properties across multiple client requests, there is one major restriction on `client` property values. The JavaScript runtime engine on the server converts the values of all of the `client` object's properties to strings.

Do not assign an object as the value of a `client` property. If you do so, the runtime engine converts that object to a string; once this happens, you won't be able to work with it as an object anymore. If a `client` property value represents another data type, such as a number, you must convert the value from a string before using it. For example, you can create an integer `client` property as follows:

```
client.totalNumber = 17;
```

You could then use `parseInt` to increment the value of `totalNumber` as follows:

```
client.totalNumber = parseInt(client.totalNumber) + 1;
```

Similarly, you can create a Boolean `client` property as follows:

```
client.bool = true;
```

Then you can check it as follows:

```
if (client.bool == "true")
    write("It's true!");
else
    write("It's false!");
```

Notice that the conditional expression compares `client.bool` to the string `true`. You can use other techniques to handle Boolean expressions. For example, to negate a Boolean property, you can use code like this:

```
client.bool = (client.bool == "true") ? false : true;
```

Although you can work with `client` properties directly, you incur some overhead doing so. If you repeatedly use the value of a `client` property, consider using top-level JavaScript variables. Before using the `client` property, assign it to a variable. When you have finished working with that variable, assign the resulting value back to the appropriate `client` property. This technique can result in a substantial performance improvement.

As noted previously, you cannot store references to other objects in the `client` object. You can, however, store object references in either the `project` or the `server` object. If you want a property associated with the `client` to have object values, create an array indexed by `client` ID and store a reference to the array in the `project` or `server` object. You can use that array to store object values associated with the `client`. Consider the following code:

```
if client.id == null
    client.id = ssjs_generateClientID();
project.clientDates[client.id] = new Date();
```

This code uses the `ssjs_generateClientID` function, described next, to create a unique ID for this `client` object. It uses that ID as an index into the `clientDates` array on the `project` object and stores a new `Date` object in that array associated with the current `client` object.

Uniquely Referring to the client Object

For some applications, you may want to store information specific to a `client/application` pair in the `project` or `server` objects. Two common cases are storing a database connection between client requests (described in Chapter 8, “Connecting to a Database.”) or storing a custom object that has the same lifetime as the predefined `client` object and that contains object values (described in “Creating a Custom client Object”).

In these situations, you need a way to refer uniquely to the `client/application` pair. JavaScript provides two functions for this purpose, `ssjs_getClientID` and `ssjs_generateClientID`. Neither function takes any arguments; both return a unique string you can use to identify the pair.

Each time you call `ssjs_generateClientID`, the runtime engine returns a new identifier. For this reason, if you use this function and want the identifier to last longer than a single client request, you need to store the identifier, possibly as a property of the `client` object. For an example of using this function, see “Sharing an Array of Connection Pools.”

If you use this function and store the ID in the `client` object, you may need to be careful that an intruder cannot get access to that ID and hence to sensitive information.

An alternative approach is to use the `ssjs_getClientID` function. If you use one of the server-side maintenance techniques for the `client` object, the JavaScript runtime engine generates and uses a identifier to access the information for a particular `client/application` pair. (For information on maintaining the `client` object, see “Techniques for Maintaining the client Object.”)

When you use these maintenance techniques, `ssjs_getClientID` returns the identifier used by the runtime engine. Every time you call this function from a particular `client/application` pair, you get the same identifier. Therefore, you do not need to store the identifier returned by

`ssjs_getClientID`. However, if you use any of the other maintenance techniques, this function returns “undefined”; if you use those techniques you must instead use the `ssjs_generateClientID` function.

If you need an identifier and you’re using a server-side maintenance technique, you probably should use the `ssjs_getClientID` function. If you use this function, you do not need to store and track the identifier yourself; the runtime engine does it for you. However, if you use a client-side maintenance technique, you cannot use the `ssjs_getClientID` function; you must use the `ssjs_generateClientID` function.

Creating a Custom client Object

As discussed in earlier sections, properties of the predefined `client` object can have only string values. This restriction can be problematic for some applications. For instance, your application may require an object that persists for the same lifetime as the predefined `client` object, but that can have objects or other data types as property values. In this case, you can create your own object and store it as a property of the `client` object.

This section provides an example of creating such an object. You can include the code in this section as a JavaScript file in your application. Then, at the beginning of pages that need to use this object, include the following statement:

```
var customClient = getCustomClient()
```

(Of course, you can use a different variable name.) If this is the first page that requests the object, `getCustomClient` creates a new object. On other pages, it returns the existing object.

This code stores an array of all the custom `client` objects defined for an application as the value of the `customClients` property of the predefined `project` object. It stores the index in this array as a string value of the `customClientID` property of the predefined `client` object. In addition, the code uses a lock stored in the `customClientLock` property of `project` to ensure safe access to that array. For information on locking, see “Sharing Objects Safely with Locking.”

The `timeout` variable in the `getCustomClient` function hard-codes the expiration period for this object. If you want a different expiration time, specify a different value for that variable. Whatever expiration time you use, you should call the predefined `client` object’s `expiration` method to set its expiration to the same time as specified for your custom object. For information on this method, see “The Lifetime of the client Object.”

To remove all expired custom client objects for the application, call the following function:

```
expireCustomClients()
```

That's all there is to it! If you use this code, the predefined client and project objects have these additional properties that you should not change:

- `client.customClientID`
- `project.customClients`
- `project.customClientLock`

You can customize the custom class by changing its `onInit` and `onDestroy` methods. As shown here, those methods are just stubs. You can add code to modify what happens when the object is created or destroyed.

Here's the code:

```
// This function creates a new custom client object or retrieves
// an existing one.
function getCustomClient()
{
    // =====> Change the hardcoded hold period <=====
    // Note: Be sure to set the client state maintenance
    // expiration to the same value you use below by calling
    // client.expiration. That allows the index held in the
predefined
    // client object to expire about the same time as the state
held in
    // the project object.
    var timeout = 600;
    var customClient = null;
    var deathRow = null;
    var newObjectWasCreated = false;

    var customClientLock = getCustomClientLock();
    customClientLock.lock();
    var customClientID = client.customClientID;
    if ( customClientID == null ) {
        customClient = new CustomClient(timeout);
        newObjectWasCreated = true;
    }
    else {
        var customClients = getCustomClients();
        customClient = customClients[customClientID];
        if ( customClient == null ) {
            customClient = new CustomClient(timeout);
            newObjectWasCreated = true;
        }
        else {
            var now = (new Date()).getTime();
```

```

        if ( customClient.expiration <= now ) {
            delete customClients[customClientID];
            deathRow = customClient;

            customClient = new CustomClient(timeout);
            newObjectWasCreated = true;
        }
        else {
            customClient.expiration = (new
Date()).getTime() +
                                timeout*1000;
        }
    }
    if ( newObjectWasCreated )
        customClient.onInit();
    customClientLock.unlock();

    if ( deathRow != null )
        deathRow.onDestroy();
    return customClient;
}

// Function to remove old custom client objects.
function expireCustomClients()
{
    var customClients = getCustomClients();
    var now = (new Date()).getTime();
    for ( var i in customClients ) {
        var clientObj = customClients[i];
        if ( clientObj.expiration <= now ) {
            var customClientLock = getCustomClientLock();
            customClientLock.lock();
            if ( clientObj.expiration <= now ) {
                delete customClients[i];
            }
            else {
                clientObj = null;
            }
            customClientLock.unlock()
            if ( clientObj != null )
                clientObj.onDestroy();
        }
    }
}

// Don't call this function directly.
// It's used by getCustomClient and expireCustomClients.
function getCustomClientLock()
{
    if ( project.customClientLock == null ) {

```

```

        project.lock()
        if ( project.customClientLock == null )
            project.customClientLock = new Lock()
        project.unlock()
    }
    return project.customClientLock
}

// Don't call this function directly.
// It's used by getCustomClient and expireCustomClients.
function getCustomClients()
{
    if ( project.customClients == null ) {
        project.lock()
        if ( project.customClients == null )
            project.customClients = new Object()
        project.unlock()
    }
    return project.customClients
}

// The constructor for the CustomClient class. Don't call this
// directly.
// Instead use the getCustomClient function.
function CustomClient(seconds)
{
    var customClients = getCustomClients();
    var customClientID = ssjs_generateClientID();

    this.onInit = CustomClientMethod_onInit;
    this.onDestroy = CustomClientMethod_onDestroy;
    this.expiration = (new Date()).getTime() + seconds*1000;

    client.customClientID = customClientID;

    customClients[customClientID] = this;
}

// If you want to customize, do so by redefining the next 2
// functions.
function CustomClientMethod_onInit()
{
    // =====> Add your object initialization code

```

```
<=====
    // This method is called while in a lock, so keep it quick!
}

function CustomClientMethod_onDestroy()
{
    // =====> Add your object cleanup code <=====
    // This method is not called from within a lock.
}
```

The project Object

The project object contains global data for an application and provides a method for sharing information among the clients accessing the application. JavaScript constructs a new project object when an application is started using the Application Manager. Each client accessing the application shares the same project object. For summary information on the project object, see “Overview of the Predefined Objects.”

In this release the JavaScript runtime engine does not, as in previous releases, create or destroy the project object for each request. When you stop an application, that application’s project object is destroyed. A new project object is created for it when the application is started again. A typical project object lifetime is days or weeks.

JavaScript constructs a set of project objects for each Netscape HTTP process running on the server. JavaScript constructs a project object for each application running on each distinct server. For example, if one server is running on port 80 and another is running on port 142 on the same machine, JavaScript constructs a distinct set of project objects for each process.

Properties

There are no predefined properties for the project object, because it is intended to contain application-specific data accessible by multiple clients. You can create properties of any legal JavaScript type, including references to other JavaScript objects. If you store a reference to

another object in the `project` object, the runtime engine does not destroy the referenced object at the end of the client request during which it is created. The object is available during subsequent requests.

A good example of a `project` object property is the next available customer ID. An application could use this property to track sequentially assigned customer IDs. Any client that accesses the application without a customer ID would be assigned an ID, and the value would be incremented for each initial access.

Remember that the `project` object exists only as long as the application is running on the server. When the application is stopped, the `project` object is destroyed, along with all of its property values. For this reason, if you have application data that needs to be stored permanently, you should store it either in a database (see Part 3, “LiveWire Database Service”) or in a file on the server (see “File System Service”).

Sharing the project Object

There is one `project` object for each application. Thus, code executing in any request for a given application can access the same `project` object. Because the server is multithreaded, there can be multiple requests active at any given time, either from the same client or from several clients.

To maintain data integrity, you must make sure that you have exclusive access to a property of the `project` object when you change the property’s value. There is no implicit locking as in previous releases; you must request exclusive access. The simplest way to do this is to use the `project` object’s `lock` and `unlock` methods. For details, see “Sharing Objects Safely with Locking.”

The server Object

The `server` object contains global data for the entire server and provides a method for sharing information between several applications running on a server. The `server` object is also automatically initialized with information about the server. For summary information on the `server` object, see “Overview of the Predefined Objects.”

The JavaScript runtime engine constructs a new `server` object when the server is started and destroys the `server` object when the server is stopped. Every application that runs on the server shares the same `server` object.

JavaScript constructs a `server` object for each Netscape HTTPD process (`server`) running on a machine. For example, there might be a server process running for port 80 and another for port 8080. These are entirely distinct server processes, and JavaScript constructs a `server`

object for each.

Properties

The following table describes the properties of the `server` object.

Table 0.1 Properties of the `server` object

Property	Description	Example
<code>hostname</code>	Full host name of the server, including the port number	<code>www.netscape.com:85</code>
<code>host</code>	Server name, subdomain, and domain name	<code>www.netscape.com</code>
<code>protocol</code>	Communications protocol being used	<code>http:</code>
<code>port</code>	Server port number being used; default is 80 for HTTP	<code>85</code>
<code>jsVersion</code>	Server version and platform	<code>3.0 WindowsNT</code>

For example, you can use the `jsVersion` property to conditionalize features based on the server platform (or version) on which the application is running, as demonstrated here:

```
if (server.jsVersion == "3.0 WindowsNT")
    write ("Application is running on a Windows NT server.");
```

In addition to these automatically initialized properties, you can create properties to store data to be shared by multiple applications. Properties may be of any legal JavaScript type, including references to other JavaScript objects. If you store a reference to another object in the `server` object, the runtime engine does not destroy the referenced object at the end of the request during which it is created. The object is available during subsequent requests.

Like the `project` object, the `server` object has a limited lifetime. When the web server is stopped, the `server` object is destroyed, along with all of its property values. For this reason, if you have application data that needs to be stored permanently, you should store it either in a database (see Part 3, “LiveWire Database Service”) or in a file on the server (see “File System Service”).

Sharing the server Object

There is one `server` object for the entire server. Thus, code executing in any request, in any application, can access the same `server` object. Because the server is multithreaded, there can be multiple requests active at any given time. To maintain data integrity, you must make sure that you have exclusive access to the `server` object when you make changes to it.

Also, you must make sure that you have exclusive access to a property of the `server` object when you change the property’s value. There is no implicit locking as in previous releases; you must request exclusive access. The simplest way to do this is to use the `server` object’s `lock` and `unlock` methods. For details, see “Sharing Objects Safely with Locking.”

Techniques for Maintaining the client Object

The `client` object is associated with both a particular application and a particular client. As discussed in “The client Object,” the runtime engine creates a new `client` object each time a new request comes from the client to the server. However, the intent is to preserve `client` object properties from one request to the next. In order to do so, the runtime engine needs to store `client` properties between requests.

There are two basic approaches for maintaining the properties of the `client` object; you can maintain them either on the client or on the server. The two client-side techniques either store the property names and their values as cookies on the client or store the names and values directly in URLs on the generated HTML page. The three server-side techniques all store the property names and their values in a data structure in server memory, but they differ in the scheme used to index that data structure.

You select the technique to use when you use the JavaScript Application Manager to install or modify the application, as explained in “Installing a New Application.” This allows you (or the site manager) to change the maintenance technique without recompiling the application.

However, the behavior of your application may change depending on the client-maintenance technique in effect, as described in the following sections. Be sure to make clear to your site manager if your application depends on using a particular technique. Otherwise, the manager can change this setting and break your application.

Because some of these techniques involve storing information either in a data structure in server memory or in the cookie file on the client, the JavaScript runtime engine additionally needs to decide when to get rid of those properties. “The Lifetime of the client Object” discusses how the runtime engine makes this decision and describes methods you can use to modify its behavior.

Comparing Client-Maintenance Techniques

Each maintenance technique has its own set of advantages and disadvantages and what is a disadvantage in one situation may be an advantage in another. You should select the technique most appropriate for your application. The individual techniques are described in more detail in subsequent sections; this section gives some general comparisons.

The following table provides a general comparison of the client-side and server-side techniques.

Table 6-2 Comparison of server-side and client-side maintenance techniques

	Server-Side	Client-Side
1.	No limit on number of properties stored or the space they use.	Limits on properties.
2.	Consumes extra server memory between client requests.	Does not consume extra server memory between client requests.
<p>These differences are related. The lack of a limit on the number and size of properties can be either a disadvantage or an advantage. In general, you want to limit the quantity of data for a consumer application available on the Internet so that the memory of your server is not swamped. In this case, you could use a client technique. However, if you have an Intranet application for which you want to store a lot of data, doing so on the server may be acceptable, as the number of expected clients is limited.</p>		
3.	Properties are stored in server memory and so are lost when server or application is restarted.	Properties are not stored in server memory and so aren't lost when server is restarted.
<p>If the properties are user preferences, you may want them to remain between server restarts; if they are particular to a single session, you may want them to disappear.</p>		

Table 6-2 Comparison of server-side and client-side maintenance techniques (Continued)

Server-Side	Client-Side
4. Either no increase or a modest increase in network traffic.	Larger increases in network traffic.

Client-side techniques transmit every property name and corresponding value to the client one or more times. This causes a significant increase in network traffic.

Because the server-side techniques all store the property names and values on the server, at most they send a generated name to the client to use in identifying the appropriate entry in the server data structure.

Figure 6-3 and Figure 6-4 show what information is stored for each technique, where it is stored, and what information goes across the network. Figure 6-3 shows this information for the client-side techniques.


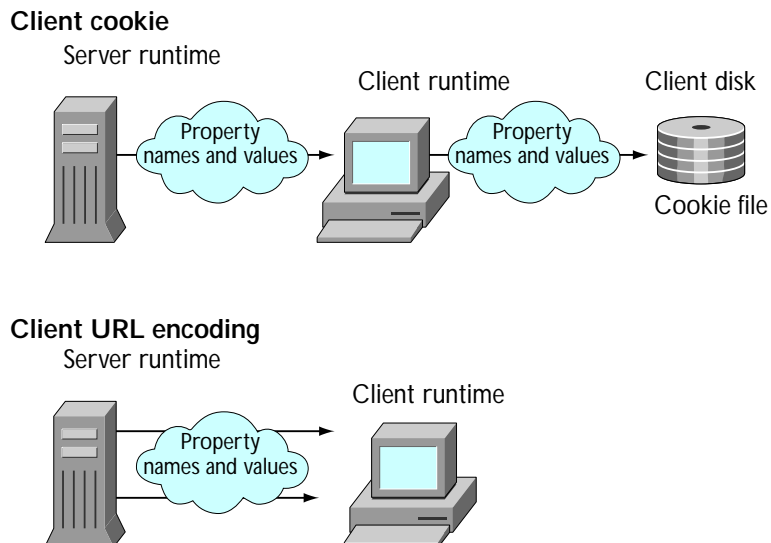
Figure 6-3 Client-side techniques

Figure 6-4 shows this information for the server-side techniques.

Figure 6-4 Server-side techniques

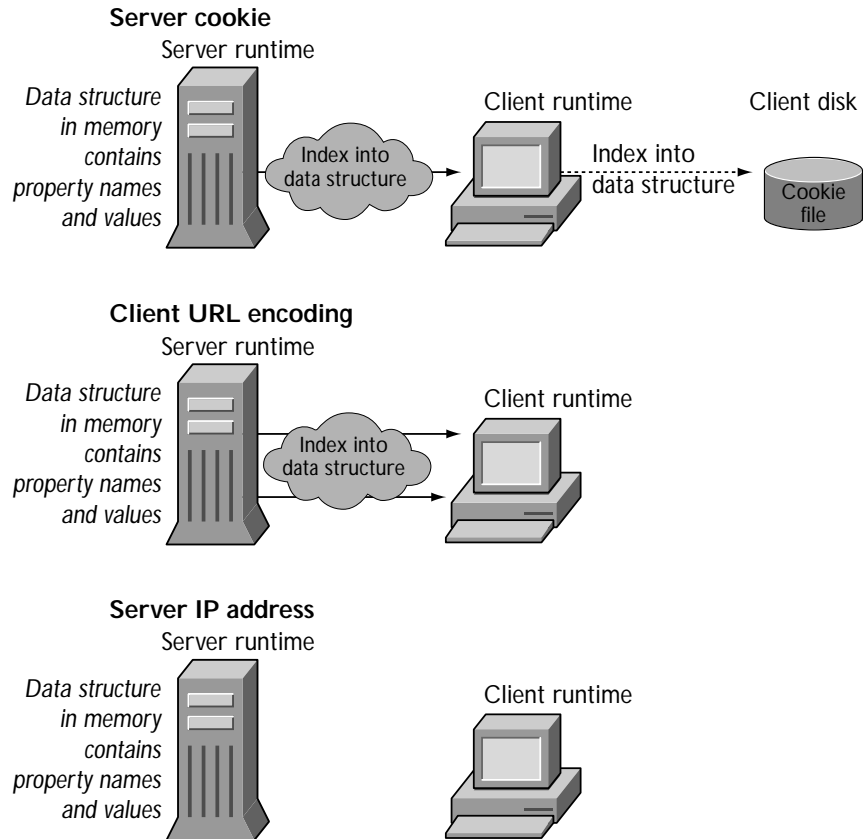

There are some other general considerations. For both techniques that use cookies, the browser must support the Netscape cookie protocol. In both cases, when you close your browser on the client machine, information is stored in the client machine's cookie file. The other techniques do not have this restriction.

The server cookie technique creates a single cookie to identify the appropriate `client` object. By contrast, the client cookie technique creates a separate cookie for each property of the `client` object. The client cookie technique is therefore more likely to be affected by the limit of 20 cookies per application.

With the client cookie technique, the `client` object properties are sent to the client when the first piece of the HTML page is sent. If you change `client` property values later in the execution of that page, those changes are not sent to the client and so are lost. This restriction does not apply to any other maintenance technique.

For both techniques that use URL encoding, if your application constructs a URL at runtime or uses the `redirect` function, it must either manually append any `client` properties that need to be saved or use `addClient` to have the runtime engine append the properties. Although appending properties is not required for other techniques, you might want to do it anyway, so that changing the maintenance technique does not break your application.

In addition, for the URL encoding techniques, as soon as the browser accesses any page outside the application, or even submits a form to the application using the GET method, all `client` properties are lost. Properties are not lost this way for the other techniques. Your choice of technique should be partially guided by whether or not you want `client` properties to be persist in these situations.

Your choice of maintenance technique rests with the requirements of your application. The client cookie technique does not use extra server memory (as do the server-side techniques) and sends information only once per page (in contrast to the client URL encoding technique). These facts may make the client cookie technique appropriate for high-volume Internet applications. However, there are circumstances under which another technique is more suitable. For example, server IP address is the fastest technique, causing no increase in network traffic. You may use it for a speed-critical application running on your intranet.

Client-Side Techniques

There are two client-side maintenance techniques:

- Client cookie
- Client URL encoding

For a comparison of all of the maintenance techniques, see “Comparing Client-Maintenance Techniques.”

When an application uses client-side maintenance techniques, the runtime engine encodes properties of the `client` object into its response to a client request, either in the header of the response (for client cookie) or in URLs in the body of the response (for client URL encoding).

Because the actual property names and values are sent between the client and the server, restarting the server does not cause the client information to be lost. However, sending this information causes an increase of network traffic.

Using Client Cookie

In the client cookie technique, the JavaScript runtime engine on the server uses the Netscape cookie protocol to transfer the properties of the `client` object and their values to the client. It creates one cookie per `client` property. The properties are sent to the client once, in the response header of the generated HTML page. The Netscape cookie protocol is described in the *Client-Side JavaScript Guide*.

To avoid conflicts with other cookies you might create for your application, the runtime engine creates a cookie name by adding `NETSCAPE_LIVEWIRE.` to the front of the name of a `client` property. For example, if `client` has a property called `custID`, the runtime engine creates a cookie named `NETSCAPE_LIVEWIRE.custID`. When it sends the cookie information to the client, the runtime engine performs any needed encoding of special characters in a property value, as described in the *Client-Side JavaScript Guide*.

Sometimes your application needs to communicate information between its JavaScript statements running on the client and those running on the server. Because this maintenance technique sends `client` object properties as cookies to the client, you can use it as a way to facilitate this communication. For more information, see “Communicating Between Server and Client.”

With this technique, the runtime engine stores `client` properties the first time it flushes the internal buffer containing the generated HTML page. For this reason, to prevent losing any information, you should assign all `client` property values early in the scripts on each page. In particular, you should ensure that `client` properties are set *before* (1) the runtime engine generates 64KB of content for the HTML page (it automatically flushes the output buffer at this point), (2) you call the `flush` function to clear the output buffer, or (3) you call the `redirect` function to change client requests. For more information, see “Flushing the Output Buffer” and “Runtime Processing on the Server.”

By default, when you use the client cookie technique, the runtime engine does not explicitly set the expiration of the cookies. In this case, the cookies expire when the user exits the browser. (This is the default behavior for all cookies.) As described in “The Lifetime of the client

Object” you can use the `client` object’s `expiration` method to change this expiration period. If you use `client.expiration`, the runtime engine sets the cookie expiration appropriately in the cookie file.

When using the client cookie technique, `client.destroy` eliminates all `client` property values but does not affect what is stored in the cookie file on the client machine. To remove the cookies from the cookie file or browser memory, do not use `client.destroy`; instead, use `client.expiration` with an argument of 0 seconds.

In general, Netscape cookies have the following limitations. These limitations apply when you use cookies to store `client` properties:

- 4KB for each cookie (including both the cookie’s name and its value). If a single cookie is longer than 4KB, the cookie entry is truncated to 4KB. This may result in an invalid `client` property value.
- 20 cookies for each application. If you create more than 20 cookies for an application, the oldest (first created) cookies are eliminated. Because the client cookie technique creates a separate cookie for each `client` property, the `client` object can store at most 20 properties. If you want to use other cookies in your application as well, the total number of cookies is still limited to 20.
- 300 total cookies in the cookie file. If you create more than 300 cookies, the oldest (first created) cookies are eliminated.

Using Client URL Encoding

In the client URL encoding technique, the runtime engine on the server transmits the properties of the `client` object and their values to the client by appending them to each URL in the generated HTML page. Consequently, the properties and their values are sent as many times as there are links on the generated HTML page, resulting in the largest increase in network traffic of all of the maintenance techniques.

The size of a URL string is limited to 4KB. Therefore, when you use client URL encoding, the total size of all the property names and their values is somewhat less than 4KB. Any information beyond the 4KB limit is truncated.

If you generate URLs dynamically or use the `redirect` function, you can add `client` properties or other properties to the URL. For this reason, whenever you call `redirect` or generate your own URL, the compiler does not automatically append the `client` properties for you. If you want `client` properties appended, use the `addClient` function. For more information, see “Manually Appending client Properties to URLs.”

In the client URL encoding technique, property values are added to URLs as those URLs are processed. You need to be careful if you expect your URLs to have the same properties and values. For example, consider the following code:

```
<SERVER>
...
client.numwrites = 2;
write (addClient(
    "<A HREF='page2.htm'>Some link</A>"));
client.numwrites = 3;
write (addClient(
    "<A HREF='page3.htm'>Another link</A>"));
...
</SERVER>
```

When the runtime engine processes the first `write` statement, it uses 2 as the value of the `numwrites` property, but when it processes the second `write` statement, it uses 3 as the value.

Also, if you use the `client.destroy` method in the middle of a page, only those links that come before the method call have property values appended to their URLs. Those that come after the method call do not have any values appended. Therefore, `client` property values are propagated to some pages but not to others. This may be undesirable.

If your page has a link to a URL outside of your application, you may not want the client state appended. In this situation, do not use a static string as the `HREF` value. Instead, compute the value. This prevents the runtime engine from automatically appending the client state to the URL. For example, assume you have this link:

```
<A HREF="mailto:me@royalairways.com">
```

In this case, the runtime engine appends the `client` object properties. To instead have it not do so, use this very similar link:

```
<A HREF=`"mailto:me@royalairways.com"`>
```

In this technique, the `client` object does not expire, because it exists solely in the URL string residing on the client. Therefore, the `client.expiration` method does nothing.

In client URL encoding, you lose all `client` properties when you submit a form using the `GET` method and when you access another application. Once again, you may or may not want to lose these properties, depending on your application's needs.

In contrast to the client cookie technique, client URL encoding does not require the web browser support the Netscape cookie protocol, nor does it require writing information on the client machine.

Server-Side Techniques

There are three server-side maintenance techniques:

- IP addresses
- Server cookie
- Server URL encoding

For a comparison of all of the maintenance techniques, see “Comparing Client-Maintenance Techniques.”

In all of these techniques, the runtime engine on the server stores the properties of the `client` object and their values in a data structure in server memory. A single data structure, preserved between client requests, is used for all applications running on the server. These techniques differ only in the index used to access the information in that data structure, ensuring that each client/application pair gets the appropriate properties and values for the `client` object.

None of these techniques writes information to the server disk. Only the server cookie technique can cause information to be written to the client machine’s disk, when the browser is exited.

Because these techniques store `client` object information in server memory between client requests, there is little or no network traffic increase. The property names and values are never sent to the client. Additionally, there are no restrictions on the number of properties a `client` object can have nor on the size of the individual properties.

The trade-off, of course, is that these techniques consume server memory between client requests. For applications that are accessed by a large number of clients, this memory consumption could become significant. Of course, this can be considered an advantage as well, in that you can store as much information as you need.

Using IP Address

The IP address technique indexes the data structure based on the application and the client’s IP address. This simple technique is also the fastest, because it doesn’t require sending any information to the client at all. Since the index is based on both the application and the IP address, this technique does still create a separate index for every application/client pair running on the server.

This technique works well when all clients have fixed IP addresses. It does not work reliably if the client is not guaranteed to have a fixed IP address, for example, if the client uses the Dynamic Host Configuration Protocol (DHCP) or an Internet service provider that

dynamically allocates IP addresses. This technique also does not work for clients that use a proxy server, because all users of the proxy report the same IP address. For this reason, this technique is probably useful only for intranet applications.

Using Server Cookie

The server cookie technique uses a long unique name, generated by the runtime engine, to index the data structure on the server. The runtime engine uses the Netscape cookie protocol to store the generated name as a cookie on the client. It does not store the property names and values as cookies. For this reason, this technique creates a single cookie, whereas the client cookie technique creates a separate cookie for each property of the `client` object.

The generated name is sent to the client once, in the header of the HTML page. You can access this generated name with the `ssjs_getClientID` function, described in “Uniquely Referring to the client Object.” This technique uses the same cookie file as the client cookie technique; these techniques differ in what information is stored in the cookie file. The Netscape cookie protocol is described in the *Client-Side JavaScript Guide*.

Also, because only the generated name is sent to the client, and not the actual property names and values, it does not matter where in your page you make changes to the `client` object properties. This contrasts with the client cookie technique.

By default, the runtime engine sets the expiration of the server data structure to ten minutes and does not set the expiration of the cookie sent to the client. As described in “The Lifetime of the client Object,” you can use the `client` object’s `expiration` method to change this expiration period and to set the cookie’s expiration.

When using server cookie, `client.destroy` eliminates all `client` property values.

In general, Netscape cookies have the limitations listed in “Using Client Cookie.” When you use server cookies, however, these limits are unlikely to be reached because only a single cookie (containing the index) is created.

This technique is fast and has no built-in restrictions on the number and size of properties and their values. You are limited more by how much space you’re willing to use on your server for saving this information.

Using Server URL Encoding

The server URL encoding technique uses a long unique name, generated by the runtime engine, to index the data structure on the server. In this case, rather than making that generated name be a cookie on the client, the server appends the name to each URL in the generated HTML page. Consequently, the name is sent as many times as there are links on the generated HTML

page. (Property names and values are not appended to URLs, just the generated name.) Once again, you can access this generated name with the `ssjs_getClientID` function, described in “Uniquely Referring to the client Object.”

If you generate URLs dynamically or use the `redirect` function, you can add properties to the URL. For this reason, whenever you call `redirect` or generate your own URL, the compiler does not automatically append the index for you. If you want to retain the index for the `client` properties, use the `addClient` function. For more information, see “Manually Appending client Properties to URLs.”

If your page has a link to a URL outside of your application, you may not want the `client` index appended. In this situation, do not use a static string for the `HREF` value. Instead, compute the value. This prevents the runtime engine from automatically appending the `client` index to the URL. For example, assume you have this link:

```
<A HREF="mailto:me@royalairways.com" >
```

In this case, the runtime engine appends the `client` index. To instead have it not do so, use this very similar link:

```
<A HREF=`"mailto:me@royalairways.com"` >
```

In server URL encoding, you lose the `client` identifier (and hence its properties and values) when you submit a form using the `GET` method. You may or may not want to lose these properties, depending on your application’s needs.

The Lifetime of the client Object

Once a client accesses an application, there is no guarantee that it will request further processing or will continue to a logical end point. For this reason, the `client` object has a built-in expiration mechanism. This mechanism allows JavaScript to occasionally “clean up” old `client` objects that are no longer necessary. Each time the server receives a request for a page in an application, JavaScript resets the lifetime of the `client` object.

Causing client Object Properties to Expire

The default behavior of the expiration mechanism varies, depending on the `client` object maintenance technique you use, as shown in the following table.

Table 6-3 Default expiration of `client` properties based on the maintenance technique

For this maintenance technique...	The properties of the client object...
client cookie	Expire when the browser is exited.

Table 6-3 Default expiration of `client` properties based on the maintenance technique

For this maintenance technique...	The properties of the client object...
client URL encoding	Never expire.
server cookie	Are removed from the data structure on the server after 10 minutes. The cookie on the client expires when the browser is exited. The <code>client</code> object properties are no longer accessible as soon the data structure is removed or the browser exited.
server URL encoding	Are removed from the data structure on the server after 10 minutes.
server IP address	Are removed from the data structure on the server after 10 minutes.

An application can control the length of time JavaScript waits before cleaning up `client` object properties. To change the length of this period, use the `expiration` method, as in the following example:

```
client.expiration(30);
```

In response to this call, the runtime engine causes `client` object properties to expire after 30 seconds. For server-side maintenance techniques, this call causes the server to remove the object properties from its data structures after 30 seconds. For the two cookie techniques, the call sets the expiration of the cookie to 30 seconds.

If the `client` object expires while there is an active client request using that object, the runtime engine waits until the end of the request before destroying the `client` object.

You must call `expiration` on each application page whose expiration behavior you want to specify. Any page that does not specify an expiration uses the default behavior.

Destroying the client Object

An application can explicitly destroy a `client` object with the `destroy` method, as follows:

```
client.destroy();
```

When an application calls `destroy`, JavaScript removes all properties from the `client` object.

If you use the client cookie technique to maintain the `client` object, `destroy` eliminates all `client` property values but has no effect on what is stored in the client cookie file. To also eliminate property values from the cookie file, do not use `destroy`; instead, use `expiration` with an argument of 0 seconds.

When you use client URL encoding to maintain the `client` object, the `destroy` method removes all `client` properties. Links on the page before the call to `destroy` retain the `client` properties in their URLs, but links after the call have no properties. Because it is unlikely that you will want only some of the URLs from the page to contain `client` properties, you probably should call `destroy` either at the top or bottom of the page when using client URL maintenance. For more information, see “Using Client URL Encoding.”

Manually Appending client Properties to URLs

When using URL encoding either on the client or on the server to maintain the `client` object, in general the runtime engine should store the appropriate information (`client` property names and values or the server data structure’s index) in all URLs sent to the client, whether those URLs were presented as static HTML or were generated by server-side JavaScript statements.

The runtime engine automatically appends the appropriate information to HTML hyperlinks that do not occur inside the `SERVER` tag. So, for example, assume your HTML page contains the following statements:

```
<HTML>
For more information, contact
<A HREF="http://royalairways.com/contact_info.html">
Royal Airways</a>
...
</HTML>
```


If the application uses URL encoding for the `client` object, the runtime engine automatically appends the `client` information to the end of the URL. You do not have to do anything special to support this behavior.

However, your application may use the `write` function to dynamically generate an HTML statement containing a URL. You can also use the `redirect` function to start a new request. Whenever you use server-side JavaScript statements to add a URL to the HTML page being generated, the runtime engine assumes that you have specified the complete URL as you want it sent. It does not automatically append client information, even when using URL encoding to maintain the `client` object. If you want client information appended, you must do so yourself.

You use the `addClient` function to manually add the appropriate `client` information. This function takes a URL and returns a new URL with the information appended. For example, suppose the appropriate contact URL varies based on the value of the `client.contact` property. Instead of the HTML above, you might have the following:

```
<HTML>
For more information, contact
<server>
if (client.contact == "VIP") {
    write ("<A
    HREF='http://royalairways.com/vip_contact_info.html'>");
    write ("Royal Airways VIP Contact</a>");
}
else {
    write ("<A
    HREF='http://royalairways.com/contact_info.html'>");
    write ("Royal Airways</a>");
}
</server>
...
</HTML>
```

In this case, the runtime engine does not append `client` properties to the URLs. If you use one of the URL-encoding client maintenance techniques, this may be a problem. If you want the `client` properties sent with this URL, instead use this code:

```
<HTML>
For more information, contact
<server>
if (client.contact == "VIP") {
    write (addClient(
        "<A HREF='http://royalairways.com/vip_contact_info.html'>"));
    write ("Royal Airways VIP Contact</a>");
}
else {
    write (addClient(
        "<A HREF='http://royalairways.com/contact_info.html'>"));
    write ("Royal Airways</a>");
}
</server>
...
</HTML>
```

Similarly, any time you use the `redirect` function to change the client request, you should use `addClient` to append the information, as in this example:

```
redirect(addClient("mypage.html"));
```

Conversely, if your page has a link to a URL outside of your application, you may *not* want client information appended. In this situation, do not use a static string for the `HREF` value. Instead, compute the value. This prevents the runtime engine from automatically appending the client index or properties to the URL. For example, assume you have this link:

```
<A HREF="mailto:me@royalairways.com">
```

In this case, the runtime engine appends client information. To instead have it not do so, use this very similar link:

```
<A HREF=`"mailto:me@royalairways.com"`>
```

Even though an application is initially installed to use a technique that does not use URL encoding to maintain `client`, it may be modified later to use a URL encoding technique. Therefore, if your application generates dynamic URLs or uses `redirect`, you may always want to use `addClient`.

Sharing Objects Safely with Locking

The execution environment for a 3.x or 4.x version of a Netscape server is multithreaded; this is, it processes more than one request at the same time. Because these requests could require JavaScript execution, more than one thread of JavaScript execution can be active at the same time.

If multiple threads simultaneously attempt to change a property of the same JavaScript object, they could leave the object in an inconsistent state. A section of code in which you want one and only one thread executing at any time is called a **critical section**.

One `server` object is shared by all clients and all applications running on the server. One `project` object is shared by all clients accessing the same application on the server. In addition, your application may create other objects it shares among client requests, or it may even share objects with other applications. To maintain data integrity within any of these shared objects, you must get exclusive access to the object before changing any of its properties.

NOTE There is no implicit locking for the `project` and `server` objects as there was in previous releases.

To better understand what can happen, consider the following example. Assume you create a shared object `project.orders` to keep track of customer orders. You update `project.orders.count` every time there is a new order, using the following code:

```
var x = project.orders.count;
x = x + 1;
project.orders.count = x;
```

Assume that `project.orders.count` is initially set to 1 and two new orders come in, in two separate threads. The following events occur:

1. The first thread stores `project.orders.count` into `x`.
2. Before it can continue, the second thread runs and stores the same value in its copy of `x`.
3. At this point, both threads have a value of 1 in `x`.
4. The second thread completes its execution and sets `project.orders.count` to 2.
5. The first thread continues, unaware that the value of `project.orders.count` has changed, and also sets it to 2.


So, the end value of `project.orders.count` is 2 rather than the correct value, 3.

To prevent problems of this kind, you need to obtain exclusive access to the properties of shared objects when writing to them. You can construct your own instances of `Lock` for this purpose that work with any shared object. In addition, the `server` and `project` objects have `lock` and `unlock` methods you can use to restrict access to those objects.

Using Instances of Lock

Think of a lock as a named flag that you must hold before you gain access to a critical section. If you ask for the named flag and somebody else is already holding it, you wait in line until that person releases the flag. While waiting, you won't change anything you shouldn't. Once you get the flag, anybody else who's waiting for it won't change anything either. If an error occurs or a timeout period elapses before you get the flag, you can either get back in line to wait some more or do something else, such as letting your user know the application is too busy to perform that operation right now. You should not decide to break into the line (by changing shared information)! Figure 6-5 illustrates this process.

Figure 6-5 Thread 2 waits while thread 1 has the lock

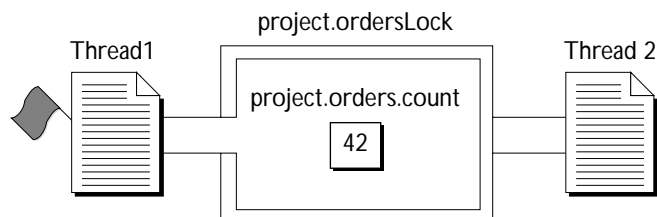

In programming terms, a lock is represented by an instance of the `Lock` class. You can use an instance of `Lock` to gain exclusive access to any shared object, providing all code that accesses the shared object honors the lock. Typically, you create your `Lock` instances on the initial page of your application (for reasons that explained later).

In your other pages, before a critical section for the shared object (for example, sections that retrieve and change a property value), you call the `Lock` instance's `lock` method. If that method returns `true`, you have the lock and can proceed. At the end of the critical section, you call the `Lock` instance's `unlock` method.

When a client request in a single execution thread calls the `lock` method, any other request that calls `lock` for the same `Lock` instance waits until the original thread calls the `unlock` method, until some timeout period elapses, or until an error occurs. This is true whether the second request is in a different thread for the same client or in a thread for a different client.

If all threads call the `lock` method before trying to change the shared object, only one thread can enter the critical section at one time.

NOTE

The use of locks is completely under the developer's control and requires cooperation. The runtime engine does not force you to call `lock`, nor does it force you to respect a lock obtained by someone else. If you don't ask, you can change anything you want. For this reason, it's very important to get into the habit of always calling `lock` and `unlock` when entering any critical section of code and to check the return value of `lock` to ensure you have the lock. You can think of it in terms of holding a flag: if you don't ask for the flag, you won't be told to wait in line. If you don't wait in line, you might change something you shouldn't.

You can create as many locks as you need. The same lock may be used to control access to multiple objects, or each object (or even object property) can have its own lock.

A lock is just a JavaScript object itself; you can store a reference to it in any other JavaScript object. Thus, for example, it is common practice to construct a `Lock` instance and store it in the `project` object.

NOTE

Because using a lock blocks other users from accessing the named flag, potentially delaying execution of their tasks, it is good practice to use locks for as short a period as possible.

The following code illustrates how to keep track of customer orders in the shared `project.orders` object discussed earlier and to update `project.orders.count` every time there is a new order. In the application's initial page, you include this code:

```
// Construct a new Lock and save in project
project.ordersLock = new Lock();
if (! project.ordersLock.isValid()) {
    // Unable to create a Lock. Redirect to error page
    redirect ("sysfailure.htm");
}
```

This code creates the `Lock` instance and verifies (in the call to `isValid`) that nothing went wrong creating it. Only in very rare cases is your `Lock` instance improperly constructed. This happens only if the runtime engine runs out of system resources while creating the object.

You typically create your `Lock` instances on the initial page so that you don't have to get a lock before you create the `Lock` instances. The initial page is run exactly once during the running of the application, when the application is started on the server. For this reason, you're guaranteed that only one instance of each lock is created.

If, however, your application creates a lock on another of its pages, multiple requests could be invoking that page at the same time. One request could check for the existence of the lock and find it not there. While that request creates the lock, another request might create a second

lock. In the meantime, the first request calls the `lock` method of its object. Then the second request calls the `lock` method of *its* object. Both requests now think they have safe access to the critical section and proceed to corrupt each other's work.

Once it has a valid lock, your application can continue. On a page that requires access to a critical section, you can use this code:

```
// Begin critical section -- obtain lock
if ( project.ordersLock.lock() ) {
    var x = project.orders.count;
    x = x + 1;
    project.orders.count = x;
    // End critical section -- release lock
    project.ordersLock.unlock();
}
else
    redirect("combacklater.htm");
```

This code requests the lock. If it gets the lock (that is, if the `lock` method returns `true`), then it enters the critical section, makes the changes, and finally releases the lock. If the `lock` method returns `false`, then this code did not get the lock. In this case, it redirects the application to a page that indicates the application is currently unable to satisfy the request.

Special Locks for project and server Objects

The `project` and `server` objects each have `lock` and `unlock` methods. You can use these methods to obtain exclusive access to properties of those objects.

There is nothing special about these methods. You still need cooperation from other sections of code. You can think of these methods as already having one flag named “project” and another named “server.” If another section of code does not call `project.lock`, it can change any of the `project` object’s properties.

Unlike the `lock` method of the `Lock` class, however, you cannot specify a timeout period for the `lock` method of the `project` and `server` objects. That is, when you call `project.lock`, the system waits indefinitely for the lock to be free. If you want to wait for only a specified amount of time, instead use an instance of the `Lock` class.

The following example uses `lock` and `unlock` to get exclusive access to the `project` object while modifying the customer ID property:

```
project.lock()
project.next_id = 1 + project.next_id;
client.id = project.next_id;
project.unlock();
```


Avoiding Deadlock

You use locks to protect a critical section of your code. In practice, this means one request waits while another executes in the critical section. You must be careful in using locks to protect critical sections. If one request is waiting for a lock that is held by a second request, and that second request is waiting for a lock held by the first request, neither request can ever continue. This situation is called **deadlock**.

Consider the earlier example of processing customer orders. Assume that the application allows two interactions. In one, a user enters a new customer; in the other, the user enters a new order. As part of entering a new customer, the application also creates a new customer order. This interaction is done in one page of the application that could have code similar to the following:

```
// Create a new customer.
if ( project.customersLock.lock() ) {
    var id = project.customers.ID;
    id = id + 1;
    project.customers.ID = id;
    // Start a new order for this new customer.
    if ( project.ordersLock.lock() ) {
        var c = project.orders.count;
        c = c + 1;
        project.orders.count = c;
        project.ordersLock.unlock();
    }
    project.customersLock.unlock();
}
```

In the second type of interaction, a user enters a new customer order. As part of entering the order, if the customer is not already a registered customer, the application creates a new customer. This interaction is done in a different page of the application that could have code similar to the following:

```
// Start a new order.
if ( project.ordersLock.lock() ) {
    var c = project.orders.count;
    c = c + 1;
    project.orders.count = c;
    if (...code to establish unknown customer...) {
        // Create a new customer.
        // This internal lock is going to cause trouble!
        if ( project.customersLock.lock() ) {
            var id = project.customers.ID;
            id = id + 1;
            project.customers.ID = id;
            project.customersLock.unlock();
        }
    }
    project.ordersLock.unlock();
}
```

Notice that each of these code fragments tries to get a second lock while already holding a lock. That can cause trouble. Assume that one thread starts to create a new customer; it obtains the `customersLock` lock. At the same time, another thread starts to create a new order; it obtains the `ordersLock` lock. Now, the first thread requests the `ordersLock` lock. Since the second thread has this lock, the first thread must wait. However, assume the second thread now asks

for the `customersLock` lock. The first thread holds that lock, so the second thread must wait. The threads are now waiting for each other. Because neither specified a timeout period, they will both wait indefinitely.

In this case, it is easy to avoid the problem. Since the values of the customer ID and the order number do not depend on each other, there is no real reason to nest the locks. You could avoid potential deadlock by rewriting both code fragments. Rewrite the first fragment as follows:

```
// Create a new customer.
if ( project.customersLock.lock() ) {
    var id = project.customers.ID;
    id = id + 1;
    project.customers.ID = id;
    project.customersLock.unlock();
}
// Start a new order for this new customer.
if ( project.ordersLock.lock() ) {
    var c = project.orders.count;
    c = c + 1;
    project.orders.count = c;
    project.ordersLock.unlock();
}
```

The second fragment looks like this:

```

// Start a new order.
if ( project.ordersLock.lock() ) {
    var c = project.orders.count;
    c = c + 1;
    project.orders.count = c;
    project.ordersLock.unlock();
}
if (...code to establish unknown customer...) {
    // Create a new customer.
    if ( project.customersLock.lock() ) {
        var id = project.customers.ID;
        id = id + 1;
        project.customers.ID = id;
        project.customersLock.unlock();
    }
}

```

Although this situation is clearly contrived, deadlock is a very real problem and can happen in many ways. It does not even require that you have more than one lock or even more than one request. Consider code in which two functions each ask for the same lock:

```

function fn1 () {
    if ( project.lock() ) {
        // ... do some stuff ...
        project.unlock();
    }
}
function fn2 () {
    if ( project.lock() ) {
        // ... do some other stuff ...
        project.unlock();
    }
}

```

By itself, that is not a problem. Later, you change the code slightly, so that `fn1` calls `fn2` while holding the lock, as shown here:

```
function fn1 () {  
  if ( project.lock() ) {  
    // ... do some stuff ...  
    fn2();  
    project.unlock();  
  }  
}
```

Now you have deadlock. This is particularly ironic, in that a single request waits forever for itself to release a flag!

Other JavaScript Functionality

This chapter describes additional server-side JavaScript functionality you can use to send email messages from you application, access the server file system, include external libraries in your application, or directly manipulate client requests and client responses.

This chapter contains the following sections:

- Mail Service
- File System Service
- Working with External Libraries
- Request and Response Manipulation

Mail Service

Your application may need to send an email message. You use an instance of the `SendMail` class for this purpose. The only methods of `SendMail` are `send`, to send the message, and `errorCode` and `errorMessage`, to interpret an error.

For example, the following script sends mail to `vpg` with the specified subject and body for the message:

```
<server>
SMName = new SendMail();
SMName.To = "vpg@royalairways.com";
SMName.From = "thisapp@netscape.com";
SMName.Subject = "Here's the information you wanted";
SMName.Body = "sharm, maldives, phuket, coral sea, taveuni, maui,
              cocos island, marathon cay, san salvador";
SMName.send();
</server>
```

The following table describes the properties of the `SendMail` class. The `To` and `From` properties are required; all other properties are optional.

Table 7-1 Properties of the `SendMail` class

<code>To</code>	A comma-delimited list of primary recipients of the message.
<code>From</code>	The user name of the person sending the message.
<code>Cc</code>	A comma-delimited list of additional recipients of the message.
<code>Bcc</code>	A comma-delimited list of recipients of the message whose names should not be visible in the message.
<code>Smtpserver</code>	The mail (SMTP) server name. This property defaults to the value specified through the setting in the administration server.
<code>Subject</code>	The subject of the message.
<code>Body</code>	The text of the message.

In addition to these properties, you can add any other properties you wish. All properties of the `SendMail` class are included in the header of the message when it is actually sent. For example, the following code sends a message to `bill` from `vpg`, setting `vpg`'s organization field to `Royal Airways`. Replies to the message go to `vpgboss`.

```
mailObj["Reply-to"] = "vpgboss";
mailObj.Organization = "Royal Airways";
mailObj.From = "vpg";
mailObj.To = "bill";
mailObj.send();
```

For more information on predefined header fields, refer to RFC 822¹, the standard for the format of internet text messages.

The `SendMail` class allows you to send either simple text-only mail messages or complex MIME-compliant mail. You can also add attachments to your message. To send a MIME message, add a `Content-type` property to the `SendMail` object and set its value to the MIME type of the message.

For example, the following code segment sends a GIF image:

```
<server>
SMName = new SendMail();
SMName.To = "vpg@royalairways.com";
SMName.From = "thisapp@netscape.com";
SMName.Subject = "Here's the image file you wanted";
SMName["Content-type"] = "image/gif";
SMName["Content-Transfer-Encoding"] = "base64";
// In this next statement, image2.gif must be base 64 encoded.
// If you use uuencode to encode the GIF file, delete the header
// (for example, "begin 644 image2.gif") and the trailer ("end").
fileObj = new File("/usr/somebody/image2.gif");
openFlag = fileObj.open("r");
if ( openFlag ) {
    len = fileObj.getLength();
    SMName.Body = fileObj.read(len);
    SMName.send();
}
</server>
```

1. <http://info.internet.isi.edu:80/in-notes/rfc/files/rfc822.txt>

Some MIME types may need more information. For example, if the content type is `multipart/mixed`, you must also specify a boundary separator for one or more different sets of data in the body. For example, the following code sends a multipart message containing two parts, both of which are plain text:

```
<server>
SMName = new SendMail();
SMName.To = "vpg@royalairways.com";
SMName.From = "thisapp@netscape.com";
SMName.Subject = "Here's the information you wanted";
SMName["Content-type"]
    = "multipart/mixed; boundary=\"simple boundary\"";
fileObj = new File("/usr/vpg/multi.txt");
openFlag = fileObj.open("r");
if ( openFlag ) {
    len = fileObj.getLength();
    SMName.Body = fileObj.read(len);
    SMName.send();
}
</server>
```

Here the file `multi.txt` contains the following multipart message:

```
This is the place for preamble.
It is to be ignored.
It is a handy place for an explanatory note to non-MIME compliant
readers.
--simple boundary
This is the first part of the body.
This does NOT end with a line break.
--simple boundary
Content-Type: text/plain; charset=us-ascii
This is the second part of the body.
It DOES end with a line break
--simple boundary--
This is the epilogue. It is also to be ignored.
```

You can nest multipart messages. That is, if you have a message whose content type is multipart, you can include another multipart message in its body. In such cases, be careful to ensure that each nested multipart entity uses a different boundary delimiter.

For details on MIME types, refer to RFC 1341¹, the MIME standard. For more information on sending mail messages with JavaScript, see the description of this class in the *Server-Side JavaScript Reference*.

File System Service

JavaScript provides a `File` class that enables applications to write to the server's file system. This is useful for generating persistent HTML files and for storing information without using a database server. One of the main advantages of storing information in a file instead of in JavaScript objects is that the information is preserved even if the server goes down.

Security Considerations

Exercise caution when using the `File` class. A JavaScript application can read or write files anywhere the operating system allows, potentially including sensitive system files. You should be sure your application does not allow an intruder to read password files or other sensitive information or to write files at will. Take care that the filenames you pass to its methods cannot be modified by an intruder.

For example, do not use `client` or `request` properties as filenames, because the values may be accessible to an intruder through cookies or URLs. In such cases, the intruder can modify cookie or URL values to gain access to sensitive files.

For similar security reasons, Navigator does not provide automatic access to the file system of client machines. If needed, the user can save information directly to the client file system by making appropriate menu choices in Navigator.

Creating a File Object

To create an instance of the `File` class, use the standard JavaScript syntax for object creation:

```
fileObjectName = new File("path");
```

1. <http://info.internet.isi.edu:80/in-notes/rfc/files/rfc1341.txt>

Here, `fileObjectName` is the name by which you refer to the file, and `path` is the complete file path. The path should be in the format of the server's file system, not a URL path.

You can display the name of a file by using the `write` function, with the `File` object as its argument. For example, the following statement displays the filename:

```
x = new File("\path\file.txt");
write(x);
```

Opening and Closing a File

Once you have created a `File` object, you use the `open` method to open the file so that you can read from it or write to it. The `open` method has the following syntax:

```
result = fileObjectName.open("mode");
```

This method returns `true` if the operation is a success and `false` otherwise. If the file is already open, the operation fails and the original file remains open.

The parameter `mode` is a string that specifies the mode in which to open the file. The following table describes how the file is opened for each mode.

Table 7-2 File-access modes

Mode	Description
<code>r</code>	Opens the file, if it exists, as a text file for reading and returns <code>true</code> . If the file does not exist, returns <code>false</code> .
<code>w</code>	Opens the file as a text file for writing. Creates a new (initially empty) text file whether or not the file exists.
<code>a</code>	Opens the file as a text file for appending (writing at the end of the file). If the file does not already exist, creates it.
<code>r+</code>	Opens the file as a text file for reading and writing. Reading and writing commence at the beginning of the file. If the file exists, returns <code>true</code> . If the file does not exist, returns <code>false</code> .
<code>w+</code>	Opens the file as a text file for reading and writing. Creates a new (initially empty) file whether or not the file already exists.
<code>a+</code>	Opens the file as a text file for reading and writing. Reading and writing commence at the end of the file. If the file does not exist, creates it.
<code>b</code>	When appended to any of the preceding modes, opens the file as a binary file rather than a text file. Applicable only on Windows operating systems.

When an application has finished using a file, it can close the file by calling the `close` method. If the file is not open, `close` fails. This method returns `true` if successful and `false` otherwise.

Locking Files

Most applications can be accessed by many users simultaneously. In general, however, different users should not try to make simultaneous changes to the same file, because unexpected errors may result.

To prevent multiple users from modifying a file at the same time, use one of the locking mechanisms provided by the Session Management Service, as described in “Sharing Objects Safely with Locking.” If one user has the file locked, other users of the application wait until the file becomes unlocked. In general, this means you should precede all file operations with `lock` and follow them with `unlock`.

If only one application can modify the same file, you can obtain the lock within the `project` object. If more than one application can access the same file, however, obtain the lock within the `server` object.

For example, suppose you have created a file called `myFile`. Then you could use it as follows:

```
if ( project.lock() ) {
    myFile.open("r");
    // ... use the file as needed ...
    myFile.close();
    project.unlock();
}
```

In this way, only one user of the application has modify to the file at one time. Alternatively, for finer locking control you could create your own instance of the `Lock` class to control access to a file. This is described in “Using Instances of `Lock`.”

Working with Files

The `File` class has a number of methods that you can use once a file is open:

- Positioning: `setPosition`, `getPosition`, `eof`. Use these methods to set and get the current pointer position in the file and determine whether the pointer is at the end of the file.
- Reading from a file: `read`, `readln`, `readByte`.
- Writing to a file: `write`, `writeln`, `writeByte`, `flush`.
- Converting between binary and text formats: `byteToString`, `stringToByte`. Use these methods to convert a single number to a character and vice versa.
- Informational methods: `getLength`, `exists`, `error`, `clearError`. Use these methods to get information about a file and to get and clear error status.

The following sections describe these methods.

Positioning Within a File

The physical file associated with a `File` object has a pointer that indicates the current position in the file. When you open a file, the pointer is either at the beginning or at the end of the file, depending on the mode you used to open it. In an empty file, the beginning and end of the file are the same.

The `setPosition` method positions the pointer within the file, returning `true` if successful and `false` otherwise.

```
fileObj.setPosition(position);
fileObj.setPosition(position, reference);
```

Here, `fileObj` is a `File` object, `position` is an integer indicating where to position the pointer, and `reference` indicates the reference point for `position`, as follows:

- 0: relative to beginning of file
- 1: relative to current position
- 2: relative to end of file
- Other (or unspecified): relative to beginning of file

The `getPosition` method returns the current position in the file, where the first byte in the file is always byte 0. This method returns -1 if there is an error.

```
fileObj.getPosition();
```

The `eof` method returns `true` if the pointer is at the end of the file and `false` otherwise. This method returns `true` after the first read operation that attempts to read past the end of the file.

```
fileObj.eof();
```

Reading from a File

Use the `read`, `readln`, and `readByte` methods to read from a file.

The `read` method reads the specified number of bytes from a file and returns a string.

```
fileObj.read(count);
```

Here, `fileObj` is a `File` object, and `count` is an integer specifying the number of bytes to read. If `count` specifies more bytes than are left in the file, then the method reads to the end of the file.

The `readln` method reads the next line from the file and returns it as a string.

```
fileObj.readln();
```

Here, `fileObj` is a `File` object. The line-separator characters (either `\r\n` on Windows or just `\n` on Unix or Macintosh) are not included in the string. The character `\r` is skipped; `\n` determines the actual end of the line. This compromise gets reasonable behavior on all platforms.

The `readByte` method reads the next byte from the file and returns the numeric value of the next byte, or -1.

```
fileObj.readByte();
```

Writing to a File

The methods for writing to a file are `write`, `writeln`, `writeByte`, and `flush`.

The `write` method writes a string to the file. It returns `true` if successful and `false` otherwise.

```
fileObj.write(string);
```


Here, `fileObj` is a `File` object, and `string` is a JavaScript string.

The `writeln` method writes a string to the file, followed by `\n` (`\r\n` in text mode on Windows). It returns `true` if the write was successful and `false` otherwise.

```
fileObj.writeln(string);
```

The `writeByte` method writes a byte to the file. It returns `true` if successful and `false` otherwise.

```
fileObj.writeByte(number);
```

Here, `fileObj` is a `File` object and `number` is a number.

When you use any of these methods, the file contents are buffered internally. The `flush` method writes the buffer to the file on disk. This method returns `true` if successful and `false` otherwise.

```
fileObj.flush();
```

Converting Data

There are two primary file formats: ASCII text and binary. The `byteToString` and `stringToByte` methods of the `File` class convert data between these formats.

The `byteToString` method converts a number into a one-character string. This method is static. You can use the `File` class object itself, and not an instance, to call this method.

```
File.byteToString(number);
```

If the argument is not a number, the method returns the empty string.

The `stringToByte` method converts the first character of its argument, a string, into a number. This method is also static.

```
File.stringToByte(string);
```

The method returns the numeric value of the first character, or 0.

Getting File Information

You can use several `File` methods to get information on files and to work with the error status.

The `getLength` method returns the number characters in a text file or the number of bytes in any other file. It returns -1 if there is an error.

```
fileObj.getLength();
```

The `exists` method returns `true` if the file exists and `false` otherwise.

```
fileObj.exists();
```

The `error` method returns the error status, or -1 if the file is not open or cannot be opened. The error status is a nonzero value if an error occurred and 0 otherwise (no error). Error status codes are platform dependent; refer to your operating system documentation.

```
fileObj.error();
```

The `clearError` method clears both the error status (the value of `error`) and the value of `eof`.

```
fileObj.clearError();
```

Example

Netscape servers include the Viewer sample application in its directory structure. Because this application allows you to view any files on the server, it is not automatically installed.

Viewer gives a good example of how to use the `File` class. If you install it, be sure to restrict access so that unauthorized persons cannot view files on your server. For information on restricting access to an application, see “Deploying an Application.”

The following code from the viewer sample application creates a `File` class, opens it for reading, and generates HTML that echoes the lines in the file, with a hard line break after each line.

```
x = new File("\tmp\names.txt");
fileIsOpen = x.open("r");
if (fileIsOpen) {
    write("file name: " + x + "<BR>");
    while (!x.eof()) {
        line = x.readLine();
        if (!x.eof())
            write(line+"<br>");
    }
    if (x.error() != 0)
        write("error reading file" + "<BR>");
    x.close();
}
```

Working with External Libraries

The recommended way to communicate with external applications is using LiveConnect, as described in Chapter 14, “LiveConnect Overview.” However, you can also call functions written in languages such as C, C++, or Pascal and compiled into libraries on the server. Such functions are called *native functions* or *external functions*. Libraries of native functions, called *external libraries*, are dynamic link libraries on Windows operating systems and shared objects on Unix operating systems.

NOTE

Be careful when using native functions with your application. Native functions can compromise security if the native program processes a command-line entry from the user (for example, a program that allows users to enter operating system or shell commands). This functionality is dangerous because an intruder can attach additional commands using semicolons to append multiple statements. It is best to avoid command-line input, unless you strictly check it.

Using native functions in an application is useful in these cases:

- If you already have complex functions written in native code that you can use in your application.
- If the application requires computation-intensive functions. In general, functions written in native code run faster than those written in JavaScript.
- If the application requires some other task you cannot do in JavaScript.

The sample directory `jsacall` contains source and header files illustrating how to call functions in external libraries from a JavaScript application.

In the Application Manager, you associate an external library with a particular application. However, once associated with any installed application, an external library can be used by all installed applications.

Follow these steps to use a native function library in a JavaScript application:

1. **Write and compile an external library of native functions in a form compatible with JavaScript.** (See “Guidelines for Writing Native Functions.”)

2. With the Application Manager, identify the library to be used by installing a new application or modifying installation parameters for an existing application. Once you identify an external library using the Application Manager, all applications on the server can call external functions in that library. (See “Identifying Library Files.”)
3. Restart the server to load the library with your application. The functions in the external library are now available to all applications on the server.
4. In your application, use the JavaScript functions `registerCFunction` to identify the library functions to be called and `callC` to call those functions. (See “Registering Native Functions” and “Using Native Functions in JavaScript.”)
5. Recompile and restart your application for the changes to take effect.

NOTE

You must restart your server to install a library to use with an application. You must restart the server any time you add new library files or change the names of the library files used by an application.

Guidelines for Writing Native Functions

Although you can write external libraries in any language, JavaScript uses C calling conventions. Your code must include the header file `jsacall.h` provided in `plugins\samples\js\jsacall\`.

This directory also includes the source code for a sample application that calls a C function defined in `jsacall.c`. Refer to these files for more specific guidelines on writing C functions for use with JavaScript.

Functions to be called from JavaScript must be exported and must conform to this type definition:

```
typedef void (*LivewireUserCFunction)
(int argc, struct LivewireCCallData argv[],
 struct LivewireCCallData* result, pblock* pb,
 Session* sn, Request* rq);
```

Identifying Library Files

Before you can run an application that uses native functions in external libraries, you must identify the library files. Using the Application Manager, you can identify libraries when you initially install an application (by clicking Add) or when you modify an application's installation parameters (by clicking Modify). For more information on identifying library files with the Application Manager, see “Installing a New Application.”

NOTE

After you enter the paths of library files in the Application Manager, you must restart your server for the changes to take effect. You must then be sure to compile and restart your application.

Once you have identified an external library using the Application Manager, all applications running on the server can call functions in the library (by using `registerCFunction` and `callC`).

Registering Native Functions

Use the JavaScript function `registerCFunction` to register a native function for use with a JavaScript application. This function has the following syntax:

```
registerCFunction(JSFunctionName, libraryPath, CFunctionName);
```

Here, `JSFunctionName` is the name of the function as it will be called in JavaScript with the `callC` function. The `libraryPath` parameter is the full pathname of the library, using the conventions of your operating system and the `CFunctionName` parameter is the name of the C function as it is defined in the library. In this method call, you must use the exact case shown in the Application Manager, even on NT.

NOTE

Backslash (\) is a special character in JavaScript, so you must use either forward slash (/) or a double backslash (\\) to separate Windows directory and filenames in `libraryPath`.

This function returns `true` if it registers the function successfully and `false` otherwise. The function might fail if JavaScript cannot find the library at the specified location or the specified function inside the library.

An application must use `registerCFunction` to register a function before it can use `callC` to call it. Once the application registers the function, it can call the function any number of times. A good place to register functions is in an application's initial page.

Using Native Functions in JavaScript

Once your application has registered a function, it can use `callC` to call it. This function has the following syntax:

```
callC(JSFunctionName, arguments);
```

Here, `JSFunctionName` is the name of the function as it was identified with `registerCFunction` and `arguments` is a comma-delimited list of arguments to the native function. The arguments can be any JavaScript values: strings, numbers, Boolean values, objects, or null. The number of arguments must match the number of arguments required by

the external function. Although you can specify a JavaScript object as an argument, doing so is rarely useful, because the object is converted to a string before being passed to the external function.

This function returns a string value returned by the external function. The `callC` function can return only string values.

The `jsacall` sample JavaScript application illustrates the use of native functions. The `jsacall` directory includes C source code (in `jsacall.c`) that defines a C function named `mystuff_EchoCArguments`. This function accepts any number of arguments and then returns a string containing HTML listing the arguments. This sample illustrates calling C functions from a JavaScript application and returning values.

To run `jsacall`, you must compile `jsacall.c` with your C compiler. Command lines for several common compilers are provided in the comments in the file.

The following JavaScript statements (taken from `jsacall.html`) register the C function as `echoCArguments` in JavaScript, call the function `echoCArguments`, and then generate HTML based on the value returned by the function.

```
var isRegistered = registerCFunction("echoCArguments",
    "c:\\mycode\\mystuff.dll", "mystuff_EchoCArguments");
if (isRegistered == true) {
    var returnValue = callC("echoCArguments",
        "first arg",
        42,
        true,
        "last arg");
    write(returnValue);
}
else {
    write("registerCFunction() returned false, "
        + "check server error log for details")
}
```

The `echoCCallArguments` function creates a string result containing HTML that reports both the type and the value of each of the JavaScript arguments passed to it. If the `registerCFFunction` returns true, the code above generates this HTML:

```
argc = 4<BR>
argv[0].tag: string; value = first arg<BR>
argv[1].tag: double; value = 42<BR>
argv[2].tag: boolean; value = true<BR>
argv[3].tag: string; value = last arg<BR>
```

Request and Response Manipulation

A typical request sent by the client to the server has no content type. The JavaScript runtime engine automatically handles such requests. However, if the user submits a form, then the client automatically puts a content type into the header to tell the server how to interpret the extra form data. That content type is usually `application/x-www-form-urlencoded`.

The runtime engine also automatically handles requests with this content type. In these situations, you rarely need direct access to the request or response header. If, however, your application uses a different content type, it must be able to manipulate the request header itself.

Conversely, the typical response sent from the server to the client has the `text/html` content type. The runtime engine automatically adds that content type to its responses. If you want a different content type in the response, you must provide it yourself.

To support these needs, the JavaScript runtime engine on the server allows your application to access (1) the header of any request and (2) the raw body of a request that has a nonstandard content type. You already control the body of the response through the `SERVER` tag and your HTML tags. The functionality described in this section also allows you to control the header of the response.

You can use this functionality for various purposes. For example, as described in “Using Cookies,” you can communicate between the client and server processes using cookies. Also, you can use this functionality to support a file upload.

The World Wide Web Consortium publishes online information about the HTTP protocol and information that can be sent using that protocol. See, for example, *HTTP Specifications and Drafts*¹.

Request Header

To access the name/value pairs of the header of the client request, use the `request.getHeader` method of the `request` object. This method returns an object whose properties and values correspond to the name/value pairs of the header.

For example, if the request contains a cookie, `header["cookie"]` or `header.cookie` is its value. The `cookie` property, containing all of the cookie’s name/value pairs (with the values encoded as described in “Using Cookies”), must be parsed by your application.

1. <http://www.w3.org/Protocols/Specs.html>

NOTE If the client object maintenance technique of an application is configured to use server-cookie, the client properties of the application are restored in subsequent requests only if the same URL is used. For example, even if 123.456.78.90 is the IP address for myserver, the following two requests are *not* considered to be the same:

```
http://myserver/hangman
http://123.456.78.90/hangman
```

The following code prints the properties and values of the header:

```
var header = request.httpHeader();
var count = 0;
var i;

for (i in header ) {
write(count + ". " + i + " " + header[i] + "<br>\n");
count++;
}
```

If you submitted a form using the GET method, your output might look like this:

```
0. connection Keep-Alive
1. user-agent Mozilla/4.1b1 (WinNT; I)
2. host piccolo:2020
3. accept image/gif, image/x-xbitmap, image/jpeg,
image/pjpeg, */*
```

If you used the POST method to submit your form, your output might look like this:

```
0. referer http://piccolo:2020/world/hello.html
1. connection Keep-Alive
2. user-agent Mozilla/4.1b1 (WinNT; I)
3. host piccolo:2020
4. accept image/gif, image/x-xbitmap, image/jpeg, image/pjpeg, */*
5. cookie NETSCAPE_LIVEWIRE.oldname=undefined;
NETSCAPE_LIVEWIRE.number=0
6. content-type multipart/form-data; boundary=-----79741602416605
7. content-length 208
```

Request Body

For normal HTML requests, the content type of the request is `application/x-www-form-urlencoded`. Upon receiving a request with this content type, the JavaScript runtime engine on the server processes the request using the data in the

body of the request. In this situation, you cannot directly access the raw data of the request body. (Of course, you can access its content through the `request` and `client` objects constructed by the runtime engine.)

If, however, the request has any other content type, the runtime engine does not automatically process the request body. In this situation, it is up to your application to decide what to do with the content.

Presumably, another page of your application posted the request for this page. Therefore, your application must expect to receive unusual content types and should know how to handle them.

To access the body of a request, you use the `getPostData` method of the `request` object. This method takes as its parameter the number of characters of the body to return. If you specify 0, it returns the entire body. The return value is a string containing the requested characters. If there is no available data, the method returns the empty string.

You can use this method to get all of the characters at once, or you can read chunks of data. Think of the body of the request as a stream of characters. As you read them, you can only go forward; you can't read the same characters multiple times.

To assign the entire request body to the `postData` variable, you can use the following statement:

```
postData = request.getPostData(0);
```

If you specify 0 as the parameter, the method gets the entire request. You can explicitly find out how many characters are in the information using the header's `content-length` property, as follows:

```
length = parseInt(header["content-length"], 10);
```

To get the request body in smaller chunks, you can specify a different parameter. For example, the following code processes the request body in chunks of 20 characters:

```
var length = parseInt(header["content-length"], 10);
var i = 0;
while (i < length) {
    postData = request.getPostData(20);
    // ...process postData...
    i = i + 20;
}
```

Of course, this would be a sensible approach only if you knew that chunks consisting of 20 characters of information were meaningful in the request body.

Response Header

If the response you send to the client uses a custom content type, you should encode this content type in the response header. The JavaScript runtime engine automatically adds the default content type (`text/html`) to the response header. If you want a custom header, you must first remove the old default content type from the header and then add the new one. You do so with the `addResponseHeader` and `deleteResponseHeader` functions.

For example, if your response uses `royalairways-format` as a custom content type, you would specify it this way:

```
deleteResponseHeader("content-type");  
addResponseHeader("content-type", "royalairways-format");
```

You can use the `addResponseHeader` function to add any other information you want to the response header.

-
- NOTE** Remember that the header is sent with the first part of the response. Therefore, you should call these functions early in the script on each page. In particular, you should ensure that the response header is set *before* any of these happen:
- The runtime engine generates 64KB of content for the HTML page (it automatically flushes the output buffer at this point).
 - You call the `flush` function to clear the output buffer.
 - You call the `redirect` function to change client requests.
-

For more information, see “Flushing the Output Buffer” and “Runtime Processing on the Server.”

LiveWire Database Service

Connecting to a Database

Working with a Database

Configuring Your Database

Data Type Conversion

Error Handling for LiveWire

Videoapp Sample Application

Connecting to a Database

This chapter discusses how to use the LiveWire Database Service to connect your application to DB2, Informix, ODBC, Oracle, or Sybase relational databases. It describes how to choose the best connection methodology for your application.

This chapter contains the following sections:

- Interactions with Databases
- Approaches to Connecting
- Database Connection Pools
- Single-Threaded and Multithreaded Databases
- Managing Connection Pools
- Individual Database Connections

Interactions with Databases

Your JavaScript applications running on iPlanet Web Server can use the LiveWire Database Service to access databases on Informix, Oracle, Sybase, and DB2 servers and on servers using the Open Database Connectivity (ODBC) standard. Your applications running on Netscape FastTrack Server can access only databases on servers using the ODBC standard.

The following discussions assume you are familiar with relational databases and Structured Query Language (SQL).

Before you create a JavaScript application that uses LiveWire, the database or databases you plan to connect to should already exist on the database server. Also, you should be familiar with their structure. If you create an entirely new application, including the database, you should design, create, and populate the database (at least in prototype form) before creating the application to access it.

Before you try to use LiveWire, be sure your environment is properly configured. For information on how to configure it, see Chapter 10, “Configuring Your Database.” Also, you can use the `videoapp` sample application, described in Chapter 13, “Videoapp Sample Application” to explore some of LiveWire’s capabilities.

Typically, to interact with a database, you follow these general steps:

1. Create a `DbPool` object to establish a pool of database connections. This is typically done on the initial page of the application, unless your application requires that users have a special database connection.
2. Connect the pool to the database. Again, this is typically done on the application’s initial page.
3. Retrieve a connection from the pool. This is done explicitly when you use the `connection` method of a `DbPool` object.
4. If you’re going to change information in the database, begin a transaction. Database transactions are discussed in “Managing Transactions.”
5. Either create a cursor or call a database stored procedure to work with information from the database. This could involve, for example, displaying results from a query or updating database contents. Close any open cursors, result sets, and stored procedures when you have finished using them. Cursors are discussed in “Manipulating Query Results with Cursors.” Stored procedures are discussed in “Calling Stored Procedures.”
6. Commit or rollback an open transaction.
7. Release the database connection.

This chapter discusses the first three of these steps. Chapter 9, “Working with a Database” discusses the remaining steps.

Approaches to Connecting

To connect to a database with the LiveWire Database Service, you use `DbPool` and `Connection` objects. You create an instance of the `DbPool` class and then access `Connection` objects through that `DbPool` object. `DbPool` and `Connection` objects separate the activities of connecting to a database and managing a set of connections from the activities of accessing the database through a connection.

This approach offers a lot of flexibility. Your application can have several database pools, each with its own configuration of database and user. Each pool can have multiple connections for that configuration. This allows simultaneous access to multiple databases or to the same database from multiple accounts. You can also associate the connection pool with the application itself instead of with a single client request and thus have transactions that span multiple client requests. You make this association by assigning the pool to a property of the `project` object and then removing the assignment when you’re finished with the pool.

As described in the following sections, you need to consider two main questions when deciding how to set up your database connections:

- How many configurations of database and user do you need?
- Does a single database connection need to span multiple client requests?

The following table summarizes how the answers to these questions affect how you set up and manage your pool of database connections and the individual connections. The following sections discuss the details of these possibilities.

Table 8-1 Considerations for creating the database pools

Number of database configurations ?	Where is the pool connected?	Where is the pool disconnected ?	What object(s) hold the pool?	Does your code need to store the pool and connection?	How does your code store the pool and connections in the <code>project</code> object?
1, shared by all clients	Application’s initial page	Nowhere	1 <code>DbPool</code> object	Yes	<code>DbPool</code> : Named property; <code>Connection</code> : 1 array

Table 8-1 Considerations for creating the database pools (Continued)

Number of database configurations ?	Where is the pool connected?	Where is the pool disconnected ?	What object(s) hold the pool?	Does your code need to store the pool and connection?	How does your code store the pool and connections in the project object?
Fixed set, shared by all clients	Application's initial page	Nowhere	N DbPool objects	Yes	DbPool: Named property; Connection: N arrays
Separate pool for each client	Client request page	Depends ¹	Many DbPool objects	Only if a connection spans client requests	DbPool: 1 array ; Connection: 1 array

1. If an individual connection does not span client requests, you can connect and disconnect the pool on each page that needs a connection. In this case, the pool is not stored between requests. If individual connections do span requests, connect on the first client page that needs the connection and disconnect on the last such page. This can result in idle connections, so your application will need to handle that possibility.

Database Connection Pools

The first step is to create an instance of the `DbPool` class and connect that object to a particular database which creates a pool of connections.

You can either create a generic `DbPool` object and later specify the connection information (using its `connect` method) or you can specify the connection information when you create the pool. A generic `DbPool` object doesn't have any available connections at the time it is created. For this reason, you may want to connect when you create the object.

```
connect (dbtype, serverName, userName, password,
        databaseName, maxConnections, commitFlag);
```

You can specify the following information when you make a connection, either when creating a `DbPool` object or when calling the `connect` method of `DbPool`:

- `dbtype`: The database type. This must be `DB2`, `INFORMIX`, `ODBC`, `ORACLE`, or `SYBASE`. (For applications running on Netscape FastTrack Server, it must be `ODBC`.)
- `serverName`: The name of the database server to which to connect. The server name typically is established when the database is installed. If in doubt, see your database or system administrator. For more information on this parameter, see the description of the `connect` method or the `DbPool` constructor in the *Server-Side JavaScript Reference*.
- `username`: The name of the user to connect to the database.

- `password`: The user's password.
- `databaseName`: The name of the database to connect to for the given server. If your database server supports the notion of multiple databases on a single server, supply the name of the database to use. If you provide an empty string, the default database is connected. For Oracle, ODBC, and DB2, you must always provide an empty string.
- `maxConnections`: (Optional) The number of connections to have available in the database pool. Remember that your database client license probably specifies a maximum number of connections. Do not set this parameter to a number higher than your license allows. If you do not supply this parameter for the `DbPool` object, its value is 1. See “Single-Threaded and Multithreaded Databases” for things you should consider before setting this parameter.
- `commitflag`: (Optional) A Boolean value indicating whether to commit or to roll back open transactions when the connection is finalized. Specify `true` to commit open transactions and `false` to roll them back. If you do not supply this parameter for the `DbPool` object, its value is `false`.

For example, the following statement creates a new database pool of five connections to an Oracle database. With this pool, uncommitted transactions are rolled back:

```
pool = new DbPool ("ORACLE", "myserver1", "ENG", "pwd1", "", 5);
```

The `dbadmin` sample application lets you experiment with connecting to different databases as different users.

For many applications, you want to share the set of connections among clients or have a connection span multiple client requests. In these situations, you should make the connection on your application's initial page. This avoids potential problems that can occur when individual clients make shared database connections.

However, for some applications each client needs to make its own connection. As discussed in “Sharing an Array of Connection Pools,” the clients may still be sharing objects. If so, be sure to use locks to control the data sharing, as discussed in “Sharing Objects Safely with Locking.”

The following table shows `DbPool` methods for managing the pool of connections. For a full description of these methods, see the *Server-Side JavaScript Reference*.

Table 8-2 `DbPool` methods for managing connection pools

<code>connect</code>	Connects the pool to a particular configuration of database and user.
<code>connected</code>	Tests whether the database pool and all of its connections are connected to a database.

Table 8-2 DbPool methods for managing connection pools (Continued)

<code>connection</code>	Retrieves an available <code>Connection</code> object from the pool.
<code>disconnect</code>	Disconnects all connections in the pool from the database.
<code>majorErrorCode</code>	Major error code returned by the database server or ODBC.
<code>majorErrorMessage</code>	Major error message returned by the database server or ODBC.
<code>minorErrorCode</code>	Secondary error code returned by vendor library.
<code>minorErrorMessage</code>	Secondary error message returned by vendor library.

Single-Threaded and Multithreaded Databases

LiveWire supports multithreaded access to your database. That is, it supports having more than one thread of execution access a single database at the same time. This support explains why it makes sense to have a connection pool with more than one connection in it. However, some

vendor database libraries are not multithreaded. For those databases, it does not matter how many connections are in your connection pool; only one connection can access the database at a time.

The following table lists the database client libraries that are multi-threaded on each platform.

Table 8-3 Multi-threading for database clients on each platform

	Sybase	Informix	Oracle	DB2	ODBC¹
NT	Yes	Yes	Yes	Yes	Yes
Sun Solaris	Yes	Yes	Yes	No	No
HP-UX	Yes	Yes	No	No	No
IBM AIX	Yes	Yes	No	Yes	No
SGI IRIX	No	No	No	Not Supported	No
Digital Unix	Yes	Yes	No	Not Supported	Not Supported

1. All Multi-threading tests for ODBC were done on MS SQL Server. If you are using a different driver for ODBC, check with that vendor to determine whether the driver is multi-threaded.

Guidelines

These guidelines are crucial for single-threaded access. However, you should think about these points even for databases with multithreaded access.

A single-threaded database library has possible serious performance ramifications. Because only one thread can access the database at a time, all other threads must wait for the first thread to stop using the connection before they can access the database. If many threads want to access the database, each could be in for a long wait. You should consider the following when designing your database access:

- Keep your database interactions very short.
Every thread must wait for every other thread. The shorter your interaction, the shorter the wait.
- Always release connections and close open cursors and stored procedures.
You should do this anyway. In the case of a single-threaded database, however, it becomes absolutely essential to prevent needless waiting.
- Always use explicit transaction control.

With explicit transaction control, it is clearer when you're done with a connection.

- Do not keep a connection open while waiting for input from the user.

Users don't always complete what they start. If a user browses away from your application while it has an open connection, the system won't know when to release the connection. Unless you've implemented a scheme for retrieving idle connections (as discussed in "Retrieving an Idle Connection"), that connection could be tied up for a very long time, thus restricting other users from accessing the database.

- Do not keep a cursor or transaction open across multiple pages of your application.

Any time a database interaction spans multiple pages of an application, the risk of a user not completing the transaction becomes even greater.

Limitations on use of transactions for database client libraries that are not multithreaded:

- If you have single threaded libraries and you use two connections on the same page from the same database type, then you can deadlock if you perform explicit transactions (that is, transactions started using `beginTransaction`) on them. This can happen with single page transactions.
- On a multi-page transaction with single threaded libraries, only one database connection can be active at a time or you may deadlock as described in previous bullet.
- If a database client library is not multi-threaded, then only one database connection can be active at a time. While you do not have to change your code to handle this situation, you should be aware that without a multi-threaded database client library, you will not get the performance gains of multiple, simultaneous connections.
- Certain database libraries are not multi-threaded. Because of this, you must set the maximum number of database connections for your application to be higher than the number of clients you expect to use the application. Otherwise, some clients may not be able to get database connections, and their application will hang.

Managing Connection Pools

At any given time, a connected `DbPool` and all the connections in the pool are associated with a particular database configuration. That is, everything in a pool is connected to a particular database server, as a particular user, with a particular password, and to a particular database.

If your application always uses the same configuration, then you can easily use a single `DbPool` object and connect exactly once. In this case, you should make the connection on your application's initial page.

If your application requires multiple configurations, either because it must connect to different databases, or to the same database as different users, or both, you need to decide how to manage those configurations.

You can connect, disconnect, and reconnect the same `DbPool` object. However, it may be more convenient to create as many pools as you need and place them under the control of the `project` object. (See Chapter 6, "Session Management Service" for information on the `project` object.) Using multiple database pools is more efficient and is generally safer than reusing a single pool.

In deciding how to manage your pools, you must consider two factors: how many different configurations you want your pools to be able to access, and whether a single connection needs to span multiple client requests. If you have a small number of possible configurations, you can create a separate pool for each configuration. "Sharing a Fixed Set of Connection Pools" discusses this approach.

If you have a very large or unknown number of configurations (for example, if all users get their own database user ID), there are two situations to consider. If each connection needs to last for only one client request, then you can create individual database pools on a client page.

However, sometimes a connection must span multiple client requests (for example, if a single database transaction spans multiple client requests). Also, you may just not want to reconnect to the database on each page of the application. If so, you can create an array of pools that is shared. "Sharing an Array of Connection Pools" discusses this approach.

Whichever approach you use, when you no longer need an individual connection in a pool, clean up the resources used by the connection so that it is available for another user. To do so, close all open cursors, stored procedures, and result sets. Release the connection back to the pool.

If you do not release the connection, when you try to disconnect the pool, the system waits before actually disconnecting for one of two conditions to occur:

- You do release all connections
- The connections go out of scope and get collected by the garbage collector

If you create individual database pools for each user, be sure to disconnect the pool when you're finished with it. For information on cursors, see "Manipulating Query Results with Cursors." For information on stored procedures and result sets, see "Calling Stored Procedures."

Sharing a Fixed Set of Connection Pools

Frequently, an application shares a small set of connection pools among all users of the application. For example, your application might need to connect to three different databases, or it might need to connect to a single database using four different user IDs corresponding to four different departments. If you have a small set of possible connection configurations, you can create separate pools for each configuration. You use `DbPool` objects for this purpose.

In this case, you want the pool of connections to exist for the entire life of the application, not just the life of a client or an individual client request. You can accomplish this by creating each database pool as a property of the `project` object. For example, the application's initial page could contain these statements:

```
project.engpool = new DbPool ("ORACLE", "myserver1", "ENG",  
    "pwd1", "", 5, true);  
project.salespool = new DbPool ("INFORMIX", "myserver2", "SALES",  
    "pwd2", "salsmktg", 2);  
project.suppools = new DbPool ("SYBASE", "myserver3", "SUPPORT",  
    "pwd3", "suppdb", 3, false);
```

These statements create three pools for different groups who use the application. The `project.eng` pool has five Oracle connections and commits any uncommitted transactions when a connection is released back to the pool. The `project.sales` pool has two Informix connections and rolls back any uncommitted transactions at the end of a connection. The `project.suppools` pool has three Sybase connections and rolls back any uncommitted transactions at the end of a connection.

You should create this pool as part of the application's initial page. That page is run only when the application starts. On user-accessible pages, you don't create a pool, and you don't change the connection. Instead, these pages determine which group the current user belongs to and uses an already established connection from the appropriate pool. For example, the following

code determines which database to use (based on the value of the `userGroup` property of the request object), looks up some information in the database and displays it to the user, and then releases the connection:

```
if (request.userGroup == "SALES") {
    salesconn = project.salespool.connection("A sales
connection");
    salesconn.SQLTable ("select * from dept");
    salesconn.release();
}
```

Alternatively, you can choose to create the pool and change the connection on a user-accessible page. If you do so, you'll have to be careful that multiple users accessing that page at the same time do not interfere with each other. For example, only one user should be able to create the pool that will be shared by all users. For information on safe sharing of information, see "Sharing Objects Safely with Locking."

Sharing an Array of Connection Pools

"Sharing a Fixed Set of Connection Pools" describes how you can use properties of the `project` object to share a fixed set of connection pools. This approach is useful if you know how many connection pools you will need at the time you develop the application and furthermore you need only a small number of connections.

For some applications, you cannot predict in advance how many connection pools you will need. For others, you can predict, but the number is prohibitively large. For example, assume that, for each customer who accesses your application, the application consults a user profile to determine what information to display from the database. You might give each customer a

unique user ID for the database. Such an application requires each user to have a different set of connection parameters (corresponding to the different database user IDs) and hence a different connection pool.

You could create the `DbPool` object and connect and disconnect it on every page of the application. This works only if a single connection does not need to span multiple client requests. Otherwise, you can handle this situation differently.

For this application, instead of creating a fixed set of connection pools during the application's initial page or a pool on each client page, you create a single property of the `project` object that will contain an array of connection pools. The elements of that array are accessed by a key based on the particular user. At initialization time, you create the array but do not put any elements in the array (since nobody has yet tried to use the application), as shown here:

```
project.sharedPools = new Object();
```

The first time a customer starts the application, the application obtains a key identifying that customer. Based on the key, the application creates a `DbPool` pool object and stores it in the array of pools. With this connection pool, it can either reconnect on each page or set up the

connection as described in “Maintaining a Connection Across Requests.” The following code either creates the pool and or obtains the already created pool, makes sure it is connected, and then works with the database:

```
// Generate a unique index to refer to this client, if that
// hasn't already been done on another page. For information
// on the ssjs_generateClientID function, see
// "Uniquely Referring to the client Object."
if client.id == null {
    client.id = ssjs_generateClientID();
}
// If there isn't already a pool for this client, create one and
// connect it to the database.
project.lock();
if (project.sharedPools[client.id] == null) {
    project.sharedPools[client.id] = new DbPool ("ORACLE",
        "myserver", user, password, "", 5, false);
}
project.unlock();
// Set a variable to this pool, for convenience.
var clientPool = project.sharedPools[client.id];
// You've got a pool: see if it's connected. If not, try to
// connect it. If that fails, redirect to a special page to
// inform the user.
project.lock();
if (!clientPool.connected()) {
    clientPool.connect("ORACLE", "myserver", user, password,
        "", 5, false);
    if (!clientPool.connected()) {
        delete project.sharedPools[client.id];
        project.unlock();
        redirect("noconnection.htm");
    }
}
project.unlock();
// If you've got this far, you're successfully connected and
// can work with the database.
clientConn = clientPool.connection();
clientConn.SQLTable("select * from customers");
// ... more database operations ...
// Always release a connection when you no longer need it.
clientConn.release();
}
```

The next time the customer accesses the application (for example, from another page in the application), it uses the same code and obtains the stored connection pool and (possibly a stored `Connection` object) from the `project` object.

If you use `ssjs_generateClientID` and store the ID on the `client` object, you may need to protect against an intruder getting access to that ID and hence to sensitive information.

NOTE

The `sharedConns` object used in this sample code is not a predefined JavaScript object. It is simply created by this sample and could be called anything you choose.

Individual Database Connections

Once you've created a pool of connections, a client page can access an individual connection from the pool. A connection is encapsulated in a `Connection` object, which you get by calling a method of the `DbPool` object. For example, suppose you have this pool:

```
project.eng = new DbPool ("ORACLE", "myserver", "ENG", "pwd1", "",  
5);
```

You can get a connection from the pool with this method call:

```
myconn = project.eng.connection ("My Connection", 60);
```

The parameters to this method are both optional. The first is a name for the connection (used for debugging); the second is an integer indicating a time-out period, in seconds. In this example, if the pool has an available connection, or if one becomes available within 60 seconds, that connection is assigned to the variable `myconn`. If no connection becomes available during this period, the method returns without a connection. For more information on waiting to get a connection from a pool, see “Waiting for a Connection.” For information on what to do if you don't get one, see “Retrieving an Idle Connection.”

When you have finished using a connection, return it to the pool by calling the `Connection` object's `release` method. Before calling the `release` method, close all open cursors, stored procedures, and result sets. When you call the `release` method, the system waits for these to be closed and then returns the connection to the database pool. The connection is then

available to the next user. (For information on cursors, see “Manipulating Query Results with Cursors.” For information on stored procedures and result sets, see “Calling Stored Procedures.”)

Once you have a connection, you can interact with the database. The following table summarizes the connection methods for working with a single connection.

Table 8-4 Connection methods for working with a single connection

Method	Description
<code>cursor</code>	Creates a database cursor for the specified SQL <code>SELECT</code> statement.
<code>SQLTable</code>	Displays query results. Creates an HTML table for results of an SQL <code>SELECT</code> statement.
<code>execute</code>	Performs the specified SQL statement. Use for SQL statements other than queries.
<code>connected</code>	Returns <code>true</code> if the database pool (and hence this connection) is connected to a database.
<code>release</code>	Releases the connection back to its database pool.
<code>beginTransaction</code>	Begins an SQL transaction.
<code>commitTransaction</code>	Commits the current SQL transaction.
<code>rollbackTransaction</code>	Rolls back the current SQL transaction.
<code>storedProc</code>	Creates a stored-procedure object and runs the specified database stored procedure.
<code>majorErrorCode</code>	Major error code returned by the database server or ODBC.
<code>majorErrorMessage</code>	Major error message returned by the database server or ODBC.
<code>minorErrorCode</code>	Secondary error code returned by vendor library.
<code>minorErrorMessage</code>	Secondary error message returned by vendor library.

Maintaining a Connection Across Requests

In some situations, you may want a single connection to span multiple client requests. That is, you might want to use the same connection on multiple HTML pages.

Typically, you use properties of the `client` object for information that spans client requests. However, the value of a `client` property cannot be an object. For that reason, you cannot store a pool of database connections in the `client` object. Instead, you use a pool of connections stored with the `project` object, managing them as described in this section. If you use this approach, you may want to encrypt user information for security reasons.

CAUTION

Take special care with this approach because storing the connection in this way makes it unavailable for other users. If all the connections are unavailable, new requests wait until someone explicitly releases a connection or until a connection times out. This is especially problematic for single-threaded database libraries. (For information setting up connections so that they are retrieved when idle for a long time, see “Retrieving an Idle Connection.”)

In the following example, a connection and a transaction span multiple client requests. The code saves the connection as a property of the `sharedConns` object, which is itself a property of the `project` object. The `sharedConns` object is not a predefined JavaScript object. It is simply created by this sample and could have any name you choose.

Because the same pool is used by all clients, you should create the `sharedConns` object and create and connect the pool itself on the application’s initial page, with code similar to this:

```
project.sharedConns = new Object();
project.sharedConns.conns = new Object();
project.sharedConns.pool = new DbPool ("SYBASE", "sybaseserver",
    "user", "password", "sybdb", 10, false);
```

Then, on the first client page that accesses the pool, follow this strategy:

```
// Generate a unique index to refer to this client, if that hasn't
// already been done on another page.
if client.id == null {
    client.id = ssjs_generateClientID();
}
// Set a variable to this pool, for convenience.
var clientPool = project.sharedConns.pool;
// See whether the pool is connected. If not, redirect to a
// special page to inform the user.
project.lock();
if (!clientPool.connected()) {
    delete project.sharedConns.pool;
    project.unlock();
    redirect("noconnection.htm");
}
project.unlock();
// Get a connection from the pool and store it in the project
object
project.sharedConns.conns[client.id] = clientPool.connection();
var clientConn = project.sharedConns.conns[client.id];
clientConn.beginTransaction();
cursor = clientConn.cursor("select * from customers", true);
// ... more database statements ...
cursor.close();
}
```

Notice that this page does not roll back or commit the transaction. The connection remains open and the transaction continues. (Transactions are discussed in “Managing Transactions.”) The second HTML page retrieves the connection, based on the value of `client.id` and continues working with the database as follows:

```
// Retrieve the connection.
var clientConn = project.sharedConns.conns[client.id];
// ... Do some more database operations ...
// In here, if the database operations succeed, set okay to 1.
// If there was a database error, set okay to 0. At the end,
// either commit or roll back the transaction on the basis of
// its value.
if (okay)
    clientConn.commitTransaction();
else
    clientConn.rollbackTransaction();
// Return the connection to the pool.
clientConn.release();
// Get rid of the object property value. You no longer need it.
delete project.sharedConns.conns[client.id];
```

In this sample, the `sharedConns` object stores a single `DbPool` object and the connections for that pool that are currently in use. Your situation could be significantly more complex. If you have a fixed set of database pools, you might predefine a separate object to store the connections for each pool. Alternatively, if you have an array of pools and each pool needs

connections that span multiple requests, you need to create an array of objects, each of which stores a pool and an array of its connections. As another wrinkle, instead of immediately redirecting if the pool isn't connected, a client page might try to reestablish the connection.

If you use `ssjs_generateClientID` and store the ID in the `client` object, you may need to protect against an intruder getting access to that ID and hence to sensitive information.

Waiting for a Connection

There are a fixed number of connections in a connection pool created with `DbPool`. If all connections are in use during an access attempt, then your application waits a specified timeout period for a connection to become free. You can control how long your application waits.

Assume that you've defined the following pool containing three connections:

```
pool = new DbPool ("ORACLE", "myserv", "user", "password", "", 3);
```

Further assume that three clients access the application at the same time, each using one of these connections. Now, a fourth client requests a connection with the following call:

```
myconnection = pool.connection();
```

This client must wait for one of the other clients to release a connection. In this case, because the call to `connection` does not specify a timeout period, the client waits indefinitely until a connection is freed, and then returns that connection.

You can specify a different timeout period by supplying arguments to the `connection` method. The second argument to the `connection` method is a timeout period, expressed in seconds. If you specify 0 as the timeout, the system waits indefinitely. For example, the following code has the connection wait only 30 seconds before timing out:

```
myconnection = pool.connection ("Name of Connection", 30);
```

If no connection becomes available within the specified time-out period, the method returns null, and an error message is set in the minor error message. You can obtain this message by calling the `minorErrorMessage` method of `pool`. If your call to `connection` times out, you may want to free one by disconnecting an existing connection. For more information, see “Retrieving an Idle Connection.”

Retrieving an Idle Connection

When your application requests a connection from a `DbPool` object, it may not get one. Your options at this point depend on the architecture of your application.

If each connection lasts only for the lifetime of a single client request, the unavailability of connections cannot be due to a user’s leaving an application idle for a significant period of time. It can only be because all the code on a single page of JavaScript has not finished executing. In this situation, you should not try to terminate connection that is in use and reuse it. If you terminate the connection at this time, you run a significant risk of leaving that thread of execution in an inconsistent state. Instead, you should make sure that your application releases each connection as soon as it is finished using it. If you don’t want to wait for a connection, you’ll have to present your user with another choice.

If, by contrast, a connection spans multiple client requests, you may want to retrieve idle connections. In this situation, a connection can become idle because the user did not finish a transaction. For example, assume that a user submits data on the first page of an application and that the data starts a multipage database transaction. Instead of submitting data for the continuation of the transaction on the next page, the user visits another site and never returns to this application. By default, the connection remains open and cannot be used by other clients that access the application.

You can manually retrieve the connection by cleaning up after it and releasing it to the database pool. To do so, write functions such as the following to perform these activities:

- `Bucket`: Define an object type (called `bucket` in this example) to hold a connection and a timestamp.
- `MarkBucket`: Mark a `bucket` object with the current timestamp.
- `RetrieveConnections`: Traverse an array of connections looking for `Connection` objects that haven’t been accessed within a certain time limit and use `CleanBucket` (described next) to retrieve the object.
- `CleanBucket`: Close cursors (and possibly stored procedures and result sets), roll back or commit any open transaction, and return the connection back to the pool.

Your application could use these functions as follows:

1. **When you get a new connection, call `Bucket` to create a `bucket` object.**

2. On any page that accesses the connection, call `MarkBucket` to update the timestamp.
3. If the application times out trying to get a connection from the pool, call `RetrieveConnection` to look for idle connections, close any open cursors, commit or rollback pending transactions, and release idle connections back to the pool.
4. If a connection was returned to the pool, then try and get the connection from the pool.

Also, on each page where your application uses a connection, it needs to be aware that another thread may have disconnected the connection before this page was reached by this client.

Creating a Bucket. The bucket holds a connection and a timestamp. This sample constructor function takes a connection as its only parameter:

```
// Constructor for Bucket
function Bucket(c)
{
    this.connection = c;
    this.lastModified = new Date();
}
```

You call this function to create a bucket for the connection as soon as you get the connection from the connection pool. You might add other properties to the connection bucket. For instance, your application may contain a cursor that spans client requests. In this case, you could use a property to add the cursor to the bucket, so that you can close an open cursor when retrieving the connection. You store the cursor in the bucket at the time you create it, as shown in the following statement:

```
myBucket.openCursor =
    myBucket.connection.cursor("select * from customer", true);
```

Marking the Bucket. The `MarkBucket` function takes a `Bucket` object as a parameter and sets the `lastModified` field to the current time.

```
function MarkBucket(bucket)
{
    bucket.lastModified = new Date();
}
```

Call `MarkBucket` on each page of the application that uses the connection contained in the bucket. This resets `lastModified` to the current date and prevents the connection from appearing idle and hence ripe for retrieval.

Retrieving Old Connections. `RetrieveConnections` scans an array of `Bucket` objects, searching for connection buckets whose timestamp predates a certain time. If one is found, then the function calls `CleanBucket` (described next) to return the connection to the database pool.

```
// Retrieve connections idle for the specified number of minutes.
function RetrieveConnections(BucketArray, timeout)
{
    var i;
    var count = 0;
    var now;
    now = new Date();
    // Do this loop for each bucket in the array.
    for (i in BucketArray) {
        // Compute the time difference between now and the last
        // modified date. This difference is expressed in
        milliseconds.
        // If it is greater than the timeout value, then call the
        clean
        // out function.
        if ((now - i.lastModified)/60000) > timeout) {
            CleanBucket(i);
            // Get rid of the bucket, because it's no longer being
            used.
            delete i;
            count = count + 1;
        }
    }
    return count;
}
```

Cleaning Up a Bucket. Once it has been determined that a connection should be retrieved (with the `RetrieveConnections` function), you need a function to clean up the details of the connection and then release it back to the database pool. This sample function closes open cursors, rolls back open transactions, and then releases the connection.

```
function CleanBucket(bucket)
{
    bucket.openCursor.close();
    bucket.connection.rollbackTransaction();
    bucket.connection.release();
}
```

`CleanBucket` assumes that this bucket contains an open cursor and its connection has an open transaction. It also assumes no stored procedures or result sets exist. In your application, you may want to do some other checking.

Pulling It All Together. The following sample code uses the functions just defined to retrieve connections that haven't been referenced within 10 minutes. First, create a shared connections array and a database pool with five connections:

```
if ( project.sharedConns == null ) {
    project.sharedConns = new Object();
    project.sharedConns.pool = new DbPool ("ORACLE", "mydb",
        "user", "password", "", 5, false);
    if ( project.sharedConns.pool.connected() ) {
        project.sharedConns.connections = new Object();
    }
    else {
        delete project.sharedConns;
    }
}
```

Now use the following code to try to get a connection. After creating the pool, generate a client ID and use that as an index into the connection array. Next, try to get a connection. If a timeout occurs, then call `RetrieveConnections` to return old connections to the pool. If `RetrieveConnections` returns a connection to the pool, try to get the connection again. If

you still can't get a connection, redirect to another page saying there are no more free connections. If a connection is retrieved, store it in a new connection bucket and store that connection bucket in the shared connections array.

```

if ( project.sharedConns != null ) {
    var pool = project.sharedConns.pool;
    // This code is run only if the pool is already connected.
    // If it is not, presumably you'd have code to connect.
    if ( pool.connected() == true ) {
        // Generate the client ID.
        client.id = ssjs_generateClientID();
        // Try to get a connection.
        var connection = pool.connection("my connection", 30);
        // If the connection is null, then none was available within
        // the specified time limit. Try and retrieve old connections.
        if (connection == null) {
            // Retrieve connections not used for the last 10 minutes.
            var count =
RetrieveConnections(project.sharedConns.connections, 10);
            // If count is nonzero, you made some connections
available.
            if (count != 0){
                connection = pool.connection("my connection", 30);
                // If connection is still null, give up.
                if (connection == null)
                    redirect("nofreeconnections.htm");
            }
            else {
                // Give up.
                redirect("nofreeconnections.htm");
            }
        }
        // If you got this far, you have a connection and can proceed.
        // Put this connection in a new bucket, start a transaction,
        // get a cursor, store that in the bucket, and continue.
        project.sharedConns.connections[client.id] =
            new Bucket(connection);
        connection.beginTransaction();
        project.sharedConns.connections[client.id].cursor =
            connection.cursor("select * from customer", true);
        // Mark the connection bucket as used.
        MarkBucket(project.sharedConns.connections[client.id]);
        // Database statements.
        ...
    }
}

```

In the next page of the multipage transaction, perform more database operations on the connection. After the last database operation to the connection, mark the connection bucket:

```
var Bucket = project.sharedConns.connections[client.id];
if ( Bucket == null) {
    // Reconnect
}
else {
    // Interact with the database.
    ...
    // The last database operation on the page.
    row = Bucket.cursor.next();
    row.customerid = 666;
    Bucket.openCursor.insertRow("customer");
    // Mark the connection bucket as having been used on this
    page.
    MarkBucket(Bucket);
}
```


Working with a Database

This chapter discusses working with DB2, Informix, ODBC, Oracle, or Sybase relational databases. It describes how to retrieve information from the database and use it in your application, how to work with database transactions, and how to execute database stored procedures.

Remember that if your application runs on Netscape FastTrack Server instead of iPlanet Web Server, it can access only databases on servers using the ODBC standard.

This chapter contains the following sections:

- Interacting with a Relational Database
- Automatically Displaying Query Results
- Executing Arbitrary SQL Statements
- Manipulating Query Results with Cursors
- Managing Transactions
- Working with Binary Data
- Calling Stored Procedures

Interacting with a Relational Database

The LiveWire Database Service allows you to interact with a relational database in many ways. You can do all of the following:

- Perform database queries and have the runtime engine automatically format the results for you.
- Use cursors to perform database queries and present the results in an application-specific way or use the results in performing calculations.

- Use cursors to change information in your database.
- Use transactions to manage your database interactions.
- Perform SQL processing not involving cursors.
- Run database stored procedures.

For information on how to set up and manage your database connections, see Chapter 8, “Connecting to a Database.”

Automatically Displaying Query Results

The simplest and quickest way to display the results of database queries is to use the `SQLTable` method of a `Connection` object. The `SQLTable` method takes an SQL `SELECT` statement and returns an HTML table. Each row and column in the query is a row and column of the table. The HTML table also has column headings for each column in the database table.

The `SQLTable` method does not give you control over formatting of the output. Furthermore, if that output contains a `Blob` object, that object does not display as an image. (For information on blobs, see “Working with Binary Data.”) If you want to customize the appearance of the output, use a database cursor to create your own display function. For more information, see “Manipulating Query Results with Cursors.”

As an example, if `myconn` is a `Connection` object, the following JavaScript statement displays the results of the database query in a table:

```
myconn.SQLTable("select * from videos");
```

The following is the first part of the table that could be generated by these statements:

Table 0.2

Title	ID	Year	Category	Quantity	On Hand	Synopsis
A Clockwork Orange	1	1975	Science Fiction	5	3	Little Alex and his droogies stop by the Miloko bar for a refreshing libation before a wild night on the town.
Philadelphia Story	1	1940	Romantic Comedy			Katherine Hepburn and Cary Grant are reunited on the eve of her remarriage, with Jimmy Stewart for complications.

Executing Arbitrary SQL Statements

The `execute` method of a `Connection` object enables an application to execute an arbitrary SQL statement. Using `execute` is referred to as performing **passthrough SQL**, because it passes SQL directly to the server.

You can use `execute` for any data definition language (DDL) or data manipulation language (DML) SQL statement supported by the database server. Examples include `CREATE`, `ALTER`, and `DROP`. While you can use it to execute any SQL statement, you cannot return data with the `execute` method.

Notice that `execute` is for performing standard SQL statements, not for performing extensions to SQL provided by a particular database vendor. For example, you cannot call the Oracle `describe` function or the Informix `load` function from the `execute` method.

To perform passthrough SQL statements, simply provide the SQL statement as the parameter to the `execute` method. For example, you might want to remove a table from the database that is referred to by the `project` object's `oldtable` property. To do so, you can use this method call:

```
connobj.execute("DROP TABLE " + project.oldtable);
```

NOTE

When using `execute`, your SQL statement must strictly conform to the SQL syntax requirements of the database server. For example, some servers require each SQL statement to be terminated by a semicolon. For more information, see your database server documentation.

If you have not explicitly started a transaction, the single statement is committed automatically. For more information on transaction control, see “Managing Transactions.”

To perform some actions, such as creating or deleting a table, you may need to have privileges granted by your database administrator. Refer to your database server documentation for more information, or ask your database administrator.

Manipulating Query Results with Cursors

In many situations, you do not simply want to display a table of query results. You may want to change the formatting of the result or even do arbitrary processing, rather than displaying it at all. To manipulate query results, you work with a database cursor returned by a database query. To create an instance of the `Cursor` class, call a `Connection` object’s `cursor` method, passing an SQL `SELECT` statement as its parameter.

You can think of a cursor as a virtual table, with rows and columns specified by the query. A cursor also implies the notion of a **current row**, which is essentially a pointer to a row in the virtual table. When you perform operations with a cursor, they usually affect the current row.

NOTE

When finished, close the database cursor by calling its `close` method. A database connection cannot be released until all associated cursors have been closed. For example, if you call a `Connection` object’s `release` method and that connection has an associated cursor that has not been closed, the connection is not actually released until you close the cursor.

The following table summarizes the methods and properties of the `Cursor` class.

Table 9-1 `Cursor` properties and methods

Method or Property	Description
<code>colName</code>	Properties corresponding to each column in the cursor. The name of each <code>colName</code> property is the name of a column in the database.
<code>close</code>	Disposes of the cursor.
<code>columns</code>	Returns the number of columns in the cursor.
<code>columnName</code>	Returns the name of a column in the cursor.

Table 9-1 Cursor properties and methods (Continued)

Method or Property	Description
<code>next</code>	Makes the next row in the cursor the current row.
<code>insertRow</code>	Inserts a new row into the specified table.
<code>updateRow</code>	Updates records in the current row of the specified table.
<code>deleteRow</code>	Deletes the current row of the specified table.

For complete information on these methods, see the description of the `Cursor` class in the *Server-Side JavaScript Reference*.

Creating a Cursor

Once an application is connected to a database, you can create a cursor by calling the `cursor` method of the associated database or `Connection` object. Creating the `Cursor` object also opens the cursor in the database. You do not need a separate open command. You can supply the following information when creating a `Cursor` object:

- An SQL `SELECT` statement supported by the database server. To ensure database independence, use SQL 89/92-compliant syntax. The cursor is created as a virtual table of the results of this SQL statement.
- An optional Boolean parameter indicating whether you want an updatable cursor. Use this parameter only if you want to change the content of the database, as described in “Changing Database Information.” It is not always possible to create an updatable cursor for every SQL statement; this is controlled by the database. For example, if the `SELECT` statement is `select count(*) from videos`, you cannot create an updatable cursor.

For example, the following statement creates a cursor for records from the `CUSTOMER` table. The records contain the columns `id`, `name`, and `city` and are ordered by the value of the `id` column.

```
custs = connobj.cursor ("select id, name, city
                        from customer order by id");
```

This statement sets the variable `custs` to a `Cursor` object. The SQL query might return the following rows:

```
1 Sally Smith Suva
2 Jane Doe Cupertino
3 John Brown Harper's Ferry
```

You can then access this information using methods of the `custs Cursor` object. This object has `id`, `name`, and `city` properties, corresponding to the columns in the virtual table.

When you initially create a `Cursor` object, the pointer is positioned just before the first row in the virtual table. The following sections describe how you can get information from the virtual table.

You can also use the string concatenation operator (+) and string variables (such as `client` or `request` property values) when constructing a `SELECT` statement. For example, the following call uses a previously stored customer ID to further constrain the query:

```
custs = connobj.cursor ("select * from customer where id = "  
    + client.customerID);
```

You can encounter various problems when you try to create a `Cursor` object. For example, if the `SELECT` statement in your call to the `cursor` method refers to a nonexistent table, the database returns an error and the `cursor` method returns null instead of a `Cursor` object. In this situation, you should use the `majorErrorCode` and `majorErrorMessage` methods to determine what error has occurred.

As a second example, suppose the `SELECT` statement refers to a table that exists but has no rows. In this case, the database may not return an error, and the `cursor` method returns a valid `Cursor` object. However, since that object has no rows, the first time you use the `next` method on the object, it returns `false`. Your application should check for this possibility.

Displaying Record Values

When you create a cursor, it acquires a `colName` property for each named column in the virtual table (other than those corresponding to aggregate functions), as determined by the `SELECT` statement. You can access the values for the current row using these properties. In the example above, the cursor has properties for the columns `id`, `name`, and `city`. You could display the values of the first returned row using the following statements:

```
// Create the Cursor object.
custs = connobj.cursor ("select id, name, city
    from customer order by id");
// Before continuing, make sure a real cursor was returned
// and there was no database error.
if ( custs && (connobj.majorErrorCode() == 0) ) {
    // Get the first row
    custs.next();
    // Display the values
    write ("<B>Customer Name:</B> " + custs.name + "<BR>");
    write ("<B>City:</B> " + custs.city + "<BR>");
    write ("<B>Customer ID:</B> " + custs.id);
    //Close the cursor
    custs.close();
}
```

Initially, the current row is positioned before the first row in the table. The execution of the `next` method moves the current row to the first row. For example, suppose this is the first row of the cursor:

```
1 Sally Smith Suva
```

In this case, the preceding code displays the following:

Customer Name: Sally Smith

City: Suva

Customer ID: 1

You can also refer to properties of a `Cursor` object (or indeed any JavaScript object) as elements of an array. The zero-index array element corresponds to the first column, the one-index array element corresponds to the second column, and so on.

For example, you could use an index to display the same column values retrieved in the previous example:

```
write ("<B>Customer Name:</B> " + custs[1] + "<BR>");  
write ("<B>City:</B> " + custs[2] + "<BR>");  
write ("<B>Customer ID:</B> " + custs[0]);
```


This technique is particularly useful inside a loop. For example, you can create a Cursor object named `custs` and display its query results in an HTML table with the following code:

```
// Create the Cursor object.
custs = connobj.cursor ("select id, name, city
    from customer order by id");
// Before continuing, make sure a real cursor was returned
// and there was no database error.
if ( custs && (connobj.majorErrorCode() == 0) ) {
    write("<TABLE BORDER=1>");
    // Display column names as headers.
    write("<TR>");
    i = 0;
    while ( i < custs.columns() ) {
        write("<TH>", custs.columnName(i), "</TH>");
        i++;
    }
    write("</TR>");
    // Display each row in the virtual table.
    while(custs.next()) {
        write("<TR>");
        i = 0;
        while ( i < custs.columns() ) {
            write("<TD>", custs[i], "</TD>");
            i++;
        }
        write("</TR>");
    }
    write("</TABLE>");
    // Close the cursor.
    custs.close();
}
```

This code would display the following table:

Table 0.3

ID	NAME	CITY
1	Sally Smith	Suva
2	Jane Doe	Cupertino

Table 0.3

ID	NAME	CITY
3	John Brown	Harper's Ferry

This example uses methods discussed in the following sections.

Displaying Expressions and Aggregate Functions

SELECT statements can retrieve values that are not columns in the database, such as aggregate values and SQL expressions. For such values, the `Cursor` object does not have a named property. You can access these values only by using the `Cursor` object's property array index for the value.

The following example creates a cursor named `empData`, navigates to the row in that cursor, and then displays the value retrieved by the aggregate function `MAX`. It also checks to make sure the results from the database are valid before using them:

```
empData = connobj.cursor ("select min(salary), avg(salary),
    max(salary) from employees");
if ( empData && (connobj.majorErrorCode() == 0) ) {
    rowexists = empData.next();
    if (rowexists) { write("Highest salary is ", empData[2]); }
}
```

This second example creates a cursor named `empRows` to count the number of rows in the table, navigates to the row in that cursor, and then displays the number of rows, once again checking validity of the data:

```
empRows = connobj.cursor ("select count(*) from employees");
if ( empRows && (connobj.majorErrorCode() == 0) ) {
    rowexists = empRows.next();
    if (rowexists) { write ("Number of rows in table: ",
empRows[0]); }
}
```

Navigating with Cursors

Initially, the pointer for a cursor is positioned before the first row in the virtual table. Use the `next` method to move the pointer through the records in the virtual table. This method moves the pointer to the next row and returns `true` as long it found another row in the virtual table. If there is not another row, `next` returns `false`.

For example, suppose a virtual table has columns named `title`, `rentalDate`, and `dueDate`. The following code uses `next` to iterate through the rows and display the column values in a table:

```
// Create the cursor.
custs = connobj.cursor ("select * from customer");
// Check for validity of the cursor and no database errors.
if ( custs && (connobj.majorErrorCode() == 0) ) {
    write("<TABLE>");
    // Iterate through rows, displaying values.
    while (custs.next()) {
        write("<TR><TD>" + custs.title + "</TD>" +
            "<TD>" + custs.rentalDate + "</TD>" +
            "<TD>" + custs.dueDate + "</TD></TR>");
    }
    write("</TABLE>");
    // Always close your cursors when finished!
    custs.close();
}
```

This code could produce output such as the following:

Table 0.4

Clockwork Orange	6/3/97	9/3/97
Philadelphia Story	8/1/97	8/5/97

You cannot necessarily depend on your place in the cursor. For example, suppose you create a cursor and, while you're working with it, someone else adds a row to the table. Depending on the settings of the database, that row may appear in your cursor. For this reason, when appropriate (such as when updating rows) you may want your code to have tests to ensure it's working on the appropriate row.

Working with Columns

The `columns` method of the `Cursor` class returns the number of columns in a cursor. This method takes no parameters:

```
custs.columns()
```

You might use this method if you need to iterate over each column in a cursor.

The `columnName` method of the `Cursor` class returns the name of a column in the virtual table. This method takes an integer as a parameter, where the integer specifies the ordinal number of the column, starting with 0. The first column in the virtual table is 0, the second is 1, and so on.

For example, the following expression assigns the name of the first column in the `custs` cursor to the variable `header`:

```
header = custs.columnName(0)
```

If your `SELECT` statement uses a wildcard (*) to select all the columns in a table, the `columnName` method does not guarantee the order in which it assigns numbers to the columns. That is, suppose you have this statement:

```
custs = connobj.cursor ("select * from customer");
```

If the customer table has 3 columns, ID, NAME, and CITY, you cannot tell ahead of time which of these columns corresponds to `custs.columnName(0)`. (Of course, you are guaranteed that successive calls to `columnName` have the same result.) If the order matters to you, you can instead hard-code the column names in the select statement, as in the following statement:

```
custs = connobj.cursor ("select ID, NAME, CITY from customer");
```

With this statement, `custs.columnName(0)` is ID, `custs.columnName(1)` is NAME, and `custs.columnName(2)` is CITY.

Changing Database Information

You can use an **updatable cursor** to modify a table based on the cursor's current row. To request an updatable cursor, add an additional parameter of `true` when creating the cursor, as in the following example:

```
custs = connobj.cursor ("select id, name, city from customer", true)
```

For a cursor to be updatable, the `SELECT` statement must be an updatable query (one that allows updating). For example, the statement cannot retrieve rows from more than one table or contain a `GROUP BY` clause, and generally it must retrieve key values from a table. For more information on constructing updatable queries, consult your database vendor's documentation.

When you use cursors to make changes to your database, you should always work inside an explicit transaction. You do so using the `beginTransaction`, `commitTransaction`, and `rollbackTransaction` methods, as described in "Managing Transactions." If you do not use explicit transactions in these situations, you may get errors from your database.

For example, Informix and Oracle both return error messages if you use a cursor without an explicit transaction. Oracle returns `Error ORA-01002: fetch out of sequence`; Informix returns `Error -206: There is no current row for UPDATE/DELETE cursor`.

As mentioned in "Navigating with Cursors," you cannot necessarily depend on your position in the cursor. For this reason, when making changes to the database, be sure to test that you're working on the correct row before changing it.

Also, remember that when you create a cursor, the pointer is positioned before any of the rows in the cursor. So, to update a row, you must call the `next` method at least once to establish the first row of the table as the current row. Once you have a row, you can assign values to columns in the cursor.

The following example uses an updatable cursor to compute the bonus for salespeople who met their quota. It then updates the database with this information:

```

connobj.beginTransaction ();
emps = connobj.cursor(
    "select * from employees where dept='sales'", true);
// Before proceeding make sure the cursor was created and
// there was no database error.
if ( emps && (connobj.majorErrorCode() == 0) ) {
    // Iterate over the rows of the cursor, updating information
    // based on the return value of the metQuota function.
    while ( emps.next() ) {
        if (metQuota (request.quota, emps.sold)) {
            emps.bonus = computeBonus (emps.sold);
        }
        else emps.bonus = 0;
        emps.updateRow ("employees");
    }
    // When done, close the cursor and commit the transaction.
    emps.close();
    connobj.commitTransaction();
}
else {
    // If there wasn't a cursor to work with, roll back the
    transaction.
    connobj.rollbackTransaction();
}

```

This example creates an updatable cursor of all employees in the Sales department. It iterates over the rows of that cursor, using the user-defined JavaScript function `metQuota` to determine whether or not the employee met quota. This function uses the value of `quota` property of the `request` object (possibly set in a form on a client page) and the `sold` column of the cursor to make this determination. The code then sets the bonus appropriately and calls `updateRow` to modify the `employees` table. Once all rows in the cursor have been accessed, the code commits the transaction. If no cursor was returned by the call to the `cursor` method, the code rolls back the transaction.

In addition to the `updateRow` method, you can use the `insertRow` and `deleteRow` methods to insert a new row or delete the current row. You do not need to assign values when you use `deleteRow`, because it simply deletes an entire row.

When you use `insertRow`, the values you assign to columns are used for the new row. If you have previously called the cursor's `next` method, then the values of the current row are used for any columns without assigned values; otherwise, the unassigned columns are null. Also, if some columns in the table are not in the cursor, then `insertRow` inserts null in these

columns. The location of the inserted row depends on the database vendor library. If you need to access the row after you call the `insertRow` method, you must first close the existing cursor and then open a new cursor.

NOTE

DB2 has a `Time` data type. JavaScript does not have a corresponding data type. For this reason, you cannot update rows with values that use the DB2 `Time` data type

Managing Transactions

A **transaction** is a group of database actions that are performed together. Either all the actions succeed together or all fail together. When you apply all actions, making permanent changes to the database, you are said to **commit** a transaction. You can also **roll back** a transaction that you have not committed; this cancels all the actions.

Transactions are important for maintaining data integrity and consistency. Although the various database servers implement transactions slightly differently, the LiveWire Database Service provides the same methods for transaction management with all databases. Refer to the database vendor documentation for information on data consistency and isolation levels in transactions.

You can use explicit transaction control for any set of actions. For example, actions that modify a database should come under transaction control. These actions correspond to SQL INSERT, UPDATE, and DELETE statements. Transactions can also be used to control the consistency of the data you refer to in your application.

For most databases, if you do not control transactions explicitly, the runtime engine uses the underlying database's autocommit feature to treat each database statement as a separate transaction. Each statement is either committed or rolled back immediately, based on the success or failure of the individual statement. Explicitly managing transactions overrides this default behavior.

In some databases, such as Oracle, autocommit is an explicit feature that LiveWire turns on for individual statements. In others, such as Informix, autocommit is the default behavior when you do not create a transaction. In general, LiveWire hides these differences and puts an application in autocommit mode whenever the application does not use `beginTransaction` to explicitly start a transaction.

For Informix ANSI databases, LiveWire does not use autocommit. For these databases, an application always uses transactions even if it never explicitly calls `beginTransaction`. The application must use `commitTransaction` or `rollbackTransaction` to finish the transaction.

NOTE

You are strongly encouraged to use explicit transaction control any time you make changes to a database. This ensures that the changes succeed or fail together. In addition, any time you use updatable cursors, you should use explicit transactions to control the consistency of your data between the time you read the data (with `next`) and the time you change it (with `insertRow`, `updateRow`, or `deleteRow`). As described in “Changing Database Information,” using explicit transaction control with updatable cursors is necessary to avoid errors in some databases such as Oracle and Informix.

Using the Transaction-Control Methods

Use the following methods of a `Connection` object to explicitly manage transactions:

- `beginTransaction` starts a new transaction. All actions that modify the database are grouped with this transaction, known as the **current transaction**.
- `commitTransaction` commits the current transaction. This method attempts to commit all the actions since the last call to `beginTransaction`.
- `rollbackTransaction` rolls back the current transaction. This method undoes all modifications since the last call to `beginTransaction`.

Of course, if your database does not support transactions, you cannot use them. For example, an Informix database created using the `NO LOG` option does not support transactions, and you will get an error if you use these methods.

The LiveWire Database Service does not support nested transactions. If you call `beginTransaction` multiple times before committing or rolling back the first transaction you opened, you'll get an error.

For `Connection` objects, the scope of a transaction is limited to the lifetime of that object. If you release the connection or close the pool of connections before calling the `commitTransaction` or `rollbackTransaction` method, then the transaction is

automatically either committed or rolled back, based on the setting of the `commitFlag` parameter provided when you made the connection, either with the `connect` method or in the `DbPool` constructor.

If there is no current transaction (that is, if the application has not called `beginTransaction`), calls to `commitTransaction` and `rollbackTransaction` can result in an error from the database.

You can set your transaction to work at different levels of granularity. The example described in “Changing Database Information” creates a single transaction for modifying all rows of the cursor. If your cursor has a small number of rows, this approach is sensible.

If, however, your cursor returns thousands of rows, you may want to process the cursor in multiple transactions. This approach can both cut down the transaction size and improve the concurrency of access to that information.

If you do break down your processing into multiple transactions, be certain that a call to `next` and an associated call to `updateRow` or `deleteRow` happen within the same transaction. If you get a row in one transaction, finish that transaction, and then attempt to either update or delete the row, you may get an error from your database.

How you choose to handle transactions depends on the goals of your application. You should refer to your database vendor documentation for more information on how to use transactions appropriately for that database type.

Working with Binary Data

Binary data for multimedia content such as an image or sound is stored in a database as a binary large object (BLOB). You can use one of two techniques to handle binary data in JavaScript applications:

- Store filenames in the database and keep the data in separate files.
- Store the data in the database as BLOBs and access it with `Blob` class methods.

If you do not need to keep BLOB data in a database, you can store the filenames in the database and access them in your application with standard HTML tags. For example, if you want to display an image for each row in a database table, you could have a column in the table called `imageFileName` containing the name of the desired image file. You could then use this HTML expression to display the image for each row:

```
<IMG SRC='mycursor.imageFileName'>
```

As the cursor navigates through the table, the name of the file in the `IMG` tag changes to refer to the appropriate file.

If you need to manipulate actual binary data in your database, the JavaScript runtime engine recognizes when the value in a column is BLOB data. That is, when the software creates a `Cursor` object, if one of the database columns contains BLOB data, the software creates a `Blob` object for the corresponding value in the `Cursor` object. You can then use the `Blob` object's methods to display that data. Also, if you want to insert BLOB data into a database, the software provides a global function for you to use.

The following table outlines the methods and functions for working with BLOB data.

Table 9-2 Methods and functions for working with Blobs

Method or Function	Description
<code>blobImage</code>	Method to use when displaying BLOB data stored in a database. Returns an HTML <code>IMG</code> tag for the specified image type (GIF, JPEG, and so on).
<code>blobLink</code>	Method to use when creating a link that refers to BLOB data with a hyperlink. Returns an HTML hyperlink to the BLOB.
<code>blob</code>	Global function to use to insert or update a row containing BLOB data. Assigns BLOB data to a column in a cursor.

The `blobImage` method fetches a BLOB from the database, creates a temporary file of the specified format, and generates an HTML IMG tag that refers to the temporary file. The runtime engine removes the temporary file after the page is generated and sent to the client.

The `blobLink` method fetches BLOB data from the database, creates a temporary file, and generates an HTML hypertext link to the temporary file. The runtime engine removes the temporary file after the user clicks the link or 60 seconds after the request has been processed.

The following example illustrates using `blobImage` and `blobLink` to create temporary files. In this case, the `FISHTBL` table has four columns: an ID, a name, and two images. One of these is a small thumbnail image; the other is a larger image. The example code writes HTML for displaying the name, the thumbnail, and a link to the larger image.

```

cursor = connobj.cursor ("select * from fishtbl");
if ( cursor && (connobj.majorErrorCode() == 0) ) {
    while (cursor.next()) {
        write (cursor.name);
        write (cursor.picture.blobImage("gif"));
        write (cursor.picture.blobLink("image\gif", "Link" +
cursor.id));
        write ("<BR>");
    }
    cursor.close();
}

```

If `FISHTBL` contains rows for four fish, the example could produce the following HTML:

```

Cod <IMG SRC="LIVEWIRE_TEMP9">
  <A HREF="LIVEWIRE_TEMP10">Link1 </A> <BR>
Anthia <IMG SRC="LIVEWIRE_TEMP11">
  <A HREF="LIVEWIRE_TEMP12">Link2 </A> <BR>
Scorpion <IMG SRC="LIVEWIRE_TEMP13">
  <A HREF="LIVEWIRE_TEMP14">Link3 </A> <BR>
Surgeon <IMG SRC="LIVEWIRE_TEMP15">
  <A HREF="LIVEWIRE_TEMP16">Link4 </A> <BR>

```

If you want to add BLOB data to a database, use the `blob` global function. This function assigns BLOB data to a column in an updatable cursor. As opposed to `blobImage` and `blobLink`, `blob` is a top-level function, not a method.

The following statements assign BLOB data to one of the columns in a row and then update that row in the `FISHTBL` table of the database. The cursor contains a single row.

```
// Begin a transaction.
connobj.beginTransaction();
// Create a cursor.
fishCursor = connobj.cursor ("select * from fishtbl where
    name='Harlequin Ghost Pipefish'", true);
// Make sure cursor was created.
if ( fishCursor && (connobj.majorErrorCode() == 0) ) {
    // Position the pointer on the row.
    rowexists = fishCursor.next();
    if ( rowexists ) {
        // Assign the blob data.
        fishCursor.picture = blob
("c:\\data\\fish\\photo\\pipe.gif");
        // Update the row.
        fishCursor.updateRow ("fishtbl");
        // Close the cursor and commit the changes.
        fishCursor.close();
        connobj.commitTransaction();
    }
    else {
        // Close the cursor and roll back the transaction.
        fishCursor.close();
        connobj.rollbackTransaction();
    }
}
else {
    // Never got a cursor; rollback the transaction.
    connobj.rollbackTransaction();
}
```

Remember that the backslash (\) is the escape character in JavaScript. For this reason, you must use two backslashes in NT filenames, as shown in the example.

Calling Stored Procedures

Stored procedures are an integral part of operating and maintaining a relational database. They offer convenience by giving you a way to automate processes that you do often, but they offer other benefits as well:

- **Limited access.** You can limit access to a sensitive database by giving users access only through a stored procedure. A user has access to the data, but only within the stored procedure. Any other access is denied.
- **Data integrity.** Stored procedures help you make sure that information is provided and entered in a consistent way. By automating complicated transactions, you can reduce the possibility of user error.
- **Efficiency.** A stored procedure is compiled once, when executed for the first time. Later executions run faster because they skip the compilation step. This also helps lighten the load on your network, because the stored procedure code is downloaded only once.

The LiveWire Database Service provides two classes for working with stored procedures, `Stproc` and `Resultset`. With the methods of these classes you can call a stored procedure and manipulate the results of that procedure.

Exchanging Information

Stored procedures work differently for the various databases supported by the LiveWire Database Service. The most important distinction for LiveWire is how you pass information to and from the stored procedure in a JavaScript application. You always use input parameters to the stored procedure to pass information into a stored procedure.

However, conceptually there are several distinct ways you might want to retrieve information from a stored procedure. Not every database vendor lets you retrieve information in all of these ways.

Result Sets

A stored procedure can execute one or more `SELECT` statements, retrieving information from the database. You can think of this information as a virtual table, very similar to a read-only cursor. (For information on cursors, see “Manipulating Query Results with Cursors.”)

LiveWire uses an instance of the `Resultset` class to contain the rows returned by a single `SELECT` statement of a stored procedure. If the stored procedure allows multiple `SELECT` statements, you get a separate `Resultset` object for each `SELECT` statement. You use the `resultSet` method of the `Stproc` class to obtain a result set object and then you use that object’s methods to manipulate the result set.

Different database vendors return a result set in these varying ways:

- Sybase stored procedures can directly return the result of executing one or more `SELECT` statements.
- Informix stored procedures can have multiple return values. Multiple return values are like the columns in a single row of a table, except that these columns are not named. In addition, if you use the `RESUME` feature, the stored procedure can have a set of these multiple return values. This set is like the rows of a table. LiveWire creates a single result set to contain this virtual table.
- Oracle stored procedures use ref cursors to contain the rows returned by a `SELECT` statement. You can open multiple ref cursors in an Oracle stored procedure to contain rows returned by several `SELECT` statements. LiveWire creates a separate `Resultset` object for each ref cursor.
- DB2 stored procedures use open cursors to return result sets.

Output and Input/Output Parameters

In addition to standard input parameters, some database vendors allow other types of parameters for their stored procedures. Output parameters store information on return from the procedure and input/output parameters both pass in information and return information.

For most databases, you use the `outParamCount` and `outParameters` methods of the `Stproc` class to access output and input/output parameters. However, Informix does not allow output or input/output parameters. Therefore, you should not use the `outParamCount` and `outParameters` methods with Informix stored procedures.

Return Values

Seen as a simple function call, a stored procedure can have a return value. For Oracle and Sybase, this return value is in addition to any result sets it returns.

You use the `returnValue` method of the `Stproc` class to access the return value. However, the return values for Informix stored procedures are used to generate its result set. For this reason, `returnValue` always returns null for Informix stored procedures. In addition, return values are not available for ODBC and DB2 stored procedures.

Steps for Using Stored Procedures

Once you have a database connection, the steps for using a stored procedure in your application vary slightly for the different databases:

1. (DB2 only) Register the stored procedure in the appropriate system tables. (You do this outside of JavaScript.)
2. (DB2, ODBC, and Sybase) Define a prototype for your stored procedure.
3. (All databases) Execute the stored procedure.
4. (All databases) Create a `resultSet` object and get the data from that object.
5. (DB2, ODBC, and Sybase) Complete the execution by accessing the return value.
6. (DB2, ODBC, Oracle, and Sybase) Complete the execution by getting the output parameters.
7. (All databases) When finished, close the stored procedure by calling its `close` method.

Notice that for several databases you can complete execution of your stored procedure either by getting the return value or by accessing the output parameters. Once you have done either of these things, you can no longer work with any result sets created by execution of the stored procedure.

The following sections describe each of these steps in more detail.

Registering the Stored Procedure

This step applies only to DB2.

DB2 has various system tables in which you can record your stored procedure. In general, entering a stored procedure in these tables is optional. However, to use your stored procedure with LiveWire, you must make entries in these tables. You perform this step outside of the JavaScript application.

For DB2 common server, you must create the `DB2CLI . PROCEDURES` system table and enter your DB2 stored procedures in it. `DB2CLI . PROCEDURES` is a pseudo-catalog table.

If your DB2 is for IBM MVS/EA version 4.1 or later, you must define the name of your stored procedures in the `SYSIBM . SYSPROCEDURES` catalog table.

Remember you use C, C++, or another source language to write a DB2 stored procedure. The data types you use with those languages do not match the data types available in DB2.

Therefore, when you add the stored procedure to `DB2CLI . PROCEDURES` or `SYSIBM . SYSPROCEDURES`, be sure to record the corresponding DB2 data type for the stored procedure parameters and not the data types of the source language.

For information on DB2 data types and on how to make entries in these tables, see your DB2 documentation.

Defining a Prototype for a Stored Procedure

This step is relevant only for DB2, ODBC, and Sybase stored procedures, both user-defined and system stored procedures. You do not need to define a prototype for stored procedures for Oracle or Informix databases.

For DB2, ODBC, and Sybase, the software cannot determine at runtime whether a particular parameter is for input, for output, or for both. Consequently, after you connect to the database, you must create a prototype providing information about the stored procedure you want to use, using the `storedProcArgs` method of the `database` or `DbPool` object.

You need exactly one prototype for each stored procedure in your application. The software ignores additional prototypes for the same stored procedure.

In the prototype, you provide the name of the stored procedure and the type of each of its parameters. A parameter must be for input (IN), output (OUT), or input and output (INOUT). For example, to create a prototype for a stored procedure called `newhire` that has two input parameters and one output parameter, you could use this method call:

```
poolobj.storedProcArgs("newhire", "IN", "IN", "OUT");
```

Executing the Stored Procedure

This step is relevant to all stored procedures.

To execute a stored procedure, you create a `Stproc` object using the database or `Connection` object's `storedProc` method. Creating the object automatically invokes the stored procedure. When creating a stored-procedure object, you specify the name of the procedure and any parameters to the procedure.

For example, assume you have a stored procedure called `newhire` that takes one string and one integer parameter. The following method call creates the `spObj` stored-procedure object and invokes the `newhire` stored procedure:

```
spObj = connobj.storedProc("newhire", "Fred Jones", 1996);
```

In general, you must provide values for all input and input/output parameters to the stored procedure. If a stored procedure has a default value defined for one of its parameters, you can use the `/Default/` directive to specify that default value. Similarly, if a stored procedure can take a null value for one of its parameters, you can specify the null value either with the `/Null/` directive or by passing in the null value itself.

For example, assume the `demosp` stored procedure takes two string parameters and one integer parameter. You could supply all the parameters as follows:

```
spobj = connobj.storedProc("demosp", "Param_1", "Param_2", 1);
```

Alternatively, to pass null for the second parameter and to use the default value for third parameter, you could use either of these statements:

```
spobj = connobj.storedProc("demosp", "Param_1", "/Null/",
"/Default/");
spobj = connobj.storedProc("demosp", "Param_1", null, "/Default/");
```

NOTE

On Informix, default values must occur only after all specified values. For example, you cannot use `/Default/` for the second parameter of a stored procedure and then specify a value for the third parameter.

You can also use the `/Default/` and `/Null/` directives for input/output parameters.

An Oracle stored procedure can take ref cursors as input/output or output parameters. For example, assume you have an Oracle stored procedure named `proc1` that takes four parameters: a ref cursor, an integer value, another ref cursor, and another integer value. The call to that stored procedure from SQL Plus might look as follows:

```
execute proc1 (refcursor1, 3, refcursor2, 5);
```

When you call this stored procedure from within a JavaScript application, however, you do not supply the ref cursor parameters. Instead, the equivalent call would be:

```
spobj = connobj.storedProc("proc1", 3, 5);
```

For information on output parameters, see “Working with Output Parameters.” Output parameters cannot be null; however, you can assign a null value to input or input/output parameters.

The following table summarizes the methods of a stored-procedure object.

Table 9-3 `stproc` methods

Method	Description
<code>resultSet</code>	Returns the next result set for the stored procedure. For Informix, you can have zero or one result set. For other databases, you can have zero, one, or more result sets.
<code>returnValue</code>	Retrieves the return value of the stored procedure. For Informix, DB2, and ODBC, this method always returns null.
<code>outParameters</code>	Returns the specified output parameter. Because Informix stored procedures do not use output parameters, do not use this method with Informix.
<code>outParamCount</code>	Returns the number of output parameters. For Informix, this method always returns 0, because Informix stored procedures do not use output parameters.

Working with Result Sets

This step is relevant for all stored procedures.

As described in “Result Sets,” different databases returns result sets in different ways. For example, assume you have the CUSTINFO table with the columns id, city, and name. In Sybase, you could use this stored procedure to get the first 200 rows of the table:

```
create proc getcusts as
begin
    select id, name, city from custinfo where id < 200
end
```

If CUSTINFO were an Informix table, the equivalent Informix stored procedure would be this:

```
create procedure getcusts returning int, char(15), char(15);
define rcity, rname char (15);
define i int;
foreach
    select id, name, city into i, rname, rcity
    from custinfo
    where id < 200;
    return i, rname, rcity with resume;
end foreach;
end procedure;
```

If CUSTINFO were an Oracle table, the equivalent Oracle stored procedure would be:

```
create or replace package orapack as
    type custcurtype is ref cursor return custinfo%rowtype;
end orapack;
create or replace procedure custresultset ( custcursor OUT
orapack.custcurtype)
AS
begin
    open custcursor for select id, name, city from custinfo where
id < 200;
end;
```

In all cases, you create a `resultSet` object to retrieve the information from the stored procedure. You do so by using the stored-procedure object's `resultSet` method, as follows:

```
resObj = spObj(resultSet());
```

As for `Cursor` objects, `resultSet` objects have a current row, which is simply the row being pointed to in the result set. Initially, the pointer is positioned before the first row of the result set. To see the values in the rows of the result set, you use the `next` method to move the pointer through the rows in the result set, as shown in the following example:

```
spobj = connobj.storedProc("getcusts");
if ( spobj && (connobj.majorErrorCode() == 0) ) {
    // Creates a new resultSet object.
    resobj = spobj(resultSet());
    // Make sure you got a result set before continuing.
    if ( resobj && (connobj.majorErrorCode() == 0) ) {
        // Initially moves the resultSet object pointer to the first
        // result set row and then loops through the rows.
        while (resObj.next())
        {
            write("<TR><TD>" + resObj.name + "</TD>");
            write("<TD>" + resObj.city + "</TD>");
            write("<TD>" + resObj.id + "</TD></TR>");
        }
        resobj.close();
    }
}
```

As long as there is another row in the result set, the next method returns `true` and moves the pointer to the next row. When the pointer reaches the last row in the result set, the next method returns `false`.

The preceding example works for a Sybase stored procedure. In that case, the `resultSet` object contains a named property for each column in the result set. For Informix and DB2 stored procedures, by contrast, the object does not contain named columns. In this case, you can get the values by referencing the column position. So, for Informix and DB2, you would use this code to display the same information:

```

spobj = connobj.storedProc("getcusts");
if ( spobj && (connobj.majorErrorCode() == 0) ) {
    // Creates a new resultSet object.
    resobj = spobj.resultSet();
    // Make sure you got a result set before continuing.
    if ( resobj && (connobj.majorErrorCode() == 0) ) {
        // Initially moves the resultSet object pointer to the first
        // result set row and then loops through the rows.
        while (resObj.next())
        {
            write("<TR><TD>" + resObj[1] + "</TD>");
            write("<TD>" + resObj[2] + "</TD>");
            write("<TD>" + resObj[0] + "</TD></TR>");
        }
        resobj.close();
    }
}

```

You can use the column position for result sets with any database, not just with Informix and DB2. You can use the column name for stored procedures for all database types other than Informix or DB2.

Multiple Result Sets

A Sybase, Oracle, DB2, or ODBC stored procedure can create multiple result sets. If it does, the stored procedure provides one `resultSet` object for each. Suppose your stored procedure executes these SQL statements:

```

select name from customers where id = 6767
select * from orders where id = 6767

```

You could use the multiple resultSet objects generated by these statements as follows:

```
// This statement is needed for DB2, ODBC, and Sybase.
poolobj.storedProcArgs("GetCustOrderInfo","IN");
spobj = connobj.storedProc("GetCustOrderInfo",6767);
if ( spobj && (connobj.majorErrorCode() == 0) ) {
    resobj1 = spobj.resultSet();
    // Make sure result set exists before continuing.
    if ( resobj1 && (connobj.majorErrorCode() == 0) ) {
        // This first result set returns only one row.
        // Make sure that row contains data.
        rowexists = resobj1.next();
        if ( rowexists )
            write("<P>Customer " + resobj1.name +
                " has the following orders:</P>");
        resobj1.close();
        // The second result set returns one row for each order placed
        // by the customer. Make sure the rows have data.
        resobj2 = spobj.resultSet();
        var i = 0;
        if ( resobj2 && (connobj.majorErrorCode() == 0) ) {
            write("\nOrder# Quantity Total</P>");
            while(resobj2.next()) {
                write(resobj2.orderno + " " + resobj2.quantity
                    + " " + resobj2.Totalamount + "</P>");
                i++;
            }
            resobj2.close();
            write("Customer has " + i + " orders.</P>");
        }
        else write("Customer has no orders.</P>");
    }
}
spobj.close();
```


For an example of using multiple Oracle ref cursors in a stored procedure, see the description of the `ResultSet` class in the *Server-Side JavaScript Reference*.

Result Set Methods and Properties

The following table summarizes the methods and properties of the `ResultSet` class.

Table 0.5 `ResultSet` methods and properties

Method or Property	Description
<code>colName</code>	<p>Properties corresponding to each of the columns in the result set. The name of each property is the name of the column in the database.</p> <p>Since Informix and DB2 stored procedures do not return named columns, these properties are not created for Informix or DB2 stored procedures.</p>
<code>columns</code>	<p>Returns the number of columns in the result set.</p> <p>For Informix, this method returns the number of return values for a single row.</p>
<code>columnName</code>	<p>Returns the name of a column in the result set.</p> <p>Because Informix and DB2 stored procedures do not have associated column names, do not use this method for stored procedures for those databases.</p>
<code>close</code>	Disposes of the <code>ResultSet</code> object.
<code>next</code>	Makes the next row in the result set the current row. Returns <code>false</code> if the current row is the last row in the result set; otherwise, returns <code>true</code> .

A `resultSet` object is a read-only, sequential-style object. For this reason, the class does not have the `insertRow`, `deleteRow`, and `updateRow` methods defined for `Cursor` objects.

When You Can Use Result Sets

A `resultSet` object is not valid indefinitely. In general, once a stored procedure starts, no interactions are allowed between the database client and the database server until the stored procedure has completed. In particular, there are three circumstances that cause a result set to be invalid.

1. If you create a result set as part of a transaction, you must finish using the result set during that transaction. Once you either commit or roll back the transaction, you can't get any more data from a result set, and you can't get any additional result sets. For example, the following code is illegal:

```
connobj.beginTransaction();
sobj = connobj.storedProc("getcusts");
resobj = sobj.resultSet();
connobj.commitTransaction();
// Illegal! Result set no longer valid!
coll = resobj[0];
```

2. For Sybase, ODBC, and DB2, you must retrieve `resultSet` objects before you call a stored-procedure object's `returnValue` or `outParameters` methods. Once you call either of these methods, you can't get any more data from a result set, and you can't get any additional result sets. See "Working with Return Values" for more information about these methods.

```
sobj = connobj.storedProc("getcusts");
resobj = sobj.resultSet();
retval = sobj.returnValue();
// Illegal! Result set no longer valid!
coll = resobj[0];
```

3. For Sybase, you must retrieve `resultSet` objects before you call the `cursor` or `SQLTable` method of the associated connection. Once you call `cursor` or `SQLTable`, the result set is no longer available. For example, the following code is illegal:

```
spobj = connobj.storedProc("getcusts");
resobj = spobj.resultSet();
curobj = connobj.cursor ("select * from orders");
// Illegal! The result set is no longer available!
coll = resobj[0];
```

4. For ODBC, a slightly different restriction holds. Again, you must work with the `resultSet` objects before you call the associated connection's `cursor` or `SQLTable` method. For ODBC, if you get a cursor, then access the result set, and then use the cursor, the `Cursor` object is no longer available. For example, the following code is illegal:

```
spobj = connobj.storedProc("getcusts");
resobj = spobj.resultSet();
curobj = connobj.cursor ("select * from orders");
coll = resobj[0];
// Illegal! The cursor is no longer available.
curobj.next();
```

Closing Result Sets

When finished, close the result set by calling its `close` method. A database connection cannot be released until all associated result sets have been closed. For example, if you call a `Connection` object's `release` method and that connection has an associated result set that has not been closed, the connection is not actually released until you close the result set.

Working with Return Values

This step is relevant to Sybase and Oracle stored procedures. For Informix, ODBC, and DB2 stored procedures, the `returnValue` method always returns null.

If your stored procedure has a return value, you can access that value with the `returnValue` method.

On DB2, ODBC, and Sybase, you must use stored procedures and cursors sequentially. You cannot intermix them. For this reason, you must let the system know that you have finished using the stored procedure before you can work with a cursor. You do this by calling the `returnValue` method of the stored procedure object. This method provides the stored procedure's return value (if it has one) and completes the execution of the stored procedure. You should also close all objects related to stored procedures when you have finished using them.

NOTE

For DB2, ODBC, and Sybase, you must retrieve `resultSet` objects before you call the `returnValue` method. Once you call `returnValue`, you can't get any more data from a result set, and you can't get any additional result sets. You should call `returnValue` after you have processed the result set and before you retrieve the output parameters.

Working with Output Parameters

This step is relevant to Sybase, Oracle, DB2, or ODBC stored procedures. For Informix stored procedures, the methods discussed here are not applicable.

To determine how many output parameters the procedure has (including both output and input/output parameters), you use the `outParamCount` method. You can work with the output parameters of a stored procedure by using the object's `outParameters` method. If `outParamCount` returns 0, the stored procedure has no output parameters. In this situation, do not call `outParameters`.

For example, suppose you created a stored procedure that finds the name of an employee when given an ID. If there is an employee name associated with the given ID, the stored procedure returns 1, and its output parameter contains the employee name. Otherwise, the output parameter is empty. The following code either displays the employee name or a message indicating the name wasn't found:

```
id = 100;
getNameProc = connobj.storedProc("getName", id);
returnValue = getNameProc.returnValue();
if (returnValue == 1)
    write ("Name of employee is " +
getNameProc.outParameters(0));
else
    write ("No employee with id = " + id);
```

Assume a stored procedure has one input parameter, one input/output parameter, and one output parameter. Further, assume the call to the stored procedure sends a value for the input parameter and the input/output parameter as shown here:

```
spobj = connobj.storedProc("myinout", 34, 56);
```

The `outParameters` method returns any input/output parameters before it returns the first output parameter.

In the preceding example, if you call `outParameters(1)`, it returns the value returned from the stored procedure. By contrast, if you call `outParameters(0)`, the method returns 56. This is the value passed to the stored procedure in the input/output parameter position.

NOTE

Output parameters cannot be null; however, you can assign a null value to input or input/output parameters.

For DB2, ODBC, and Sybase, you must retrieve `resultSet` objects and use the `returnValue` method before you call `outParameters`. Once you call `returnValue` or `outParameters`, you can't get any more data from a result set, and you can't get any additional result sets. You should call `outParameters` after you have processed the result set and any return values.

Closing Stored Procedures

When finished, close the stored procedure by calling its `close` method. A database connection cannot be released until all associated stored procedures have been closed. For example, if you call a `Connection` object's `release` method and that connection has an associated stored procedure that has not been closed, the connection is not actually released until you close the stored procedure.

Informix and Sybase Exceptions

Informix and Sybase stored procedures can return error codes using exceptions. After you run the stored procedure, you can retrieve these error codes and error messages using the `majorErrorCode` and `majorErrorMessage` methods of the associated database or `Connection` object.

For example, assume you have the following Informix stored procedure:

```
create procedure usercheck (user varchar(20))
if user = 'LiveWire' then
raise exception -746, 0, 'User not Allowed';
endif
end procedure
```

When you run this stored procedure, you could check whether an error occurred and then access the error code and message as follows:

```
spobj = connobj.storedProc("usercheck");
if ( connobj.majorErrorCode() ) {
    write("The procedure returned this error code: " +
        connobj.majorErrorCode());
    write("The procedure returned this error message: " +
        connobj.majorErrorMessage());
}
```


Configuring Your Database

This chapter describes how to set up your database to run with the LiveWire Database Service. You should read this chapter and “Configuration Information” before you try to use LiveWire with your JavaScript applications.

NOTE

There may have been changes to the database clients that are supported. For the latest information, see the *iPlanet Web Server 4.1 Release Notes*.

This chapter contains the following sections:

- About LiveWire Database Service
- Checking Your Database Configuration
- Supported Database Clients and ODBC Drivers
- DB2
- Informix
- ODBC
- Oracle
- Sybase

About LiveWire Database Service

With the release of the 3.x and 4.x versions of Netscape servers, you must install a database client library (and a particular version of that library) if you wish to use the LiveWire Database Service. You must also configure the client library for use with LiveWire.

iPlanet Web Servers do not ship with any database client libraries. You must contact your database vendor for the appropriate library. You need only install and configure the database client libraries for the databases you will use.

If you install your database on a machine other than the one on which the web server is installed, you must have a client database library installed on the machine that has the web server. You must obtain the proper license arrangements directly from your database vendor. iPlanet does not make these arrangements for you.

The requirements for configuring your database may differ if your database and your web server are installed on the same machine or on different machines. If they are on the same machine, the following information refers to it as a *local* configuration; if on different machines, as a *remote* configuration.

This chapter describes only those aspects of installing the database client that are specific to installing it for use with LiveWire. For general information on installing a database client, refer to the appropriate database vendor documentation.

Checking Your Database Configuration


After you've done the setup described in this chapter, you can use the `dbadmin` sample application to verify that your database connection works properly. You use this JavaScript sample application to connect to your database server and perform various simple tasks such as executing a `SELECT` statement and displaying the results or sending an arbitrary SQL command to the server.

Because you can use `dbadmin` to modify and delete database tables, access to it is automatically restricted if you choose to protect the Application Manager. For more information on restricting the Application Manager, see "Controlling Access to an Application."

The first thing you must do when using `dbadmin` is to connect to a database. Choose `Connect to Database`. A form, shown in Figure 10-1, appears in which you can enter connection information. Enter the parameters, and click `Connect` to attempt to connect to the server. For

information on the parameters you use to connect, see “Database Connection Pools.” For further information, see the description of the connect method in the *Server-Side JavaScript Reference*.

Figure 10-1 The dbadmin connection page

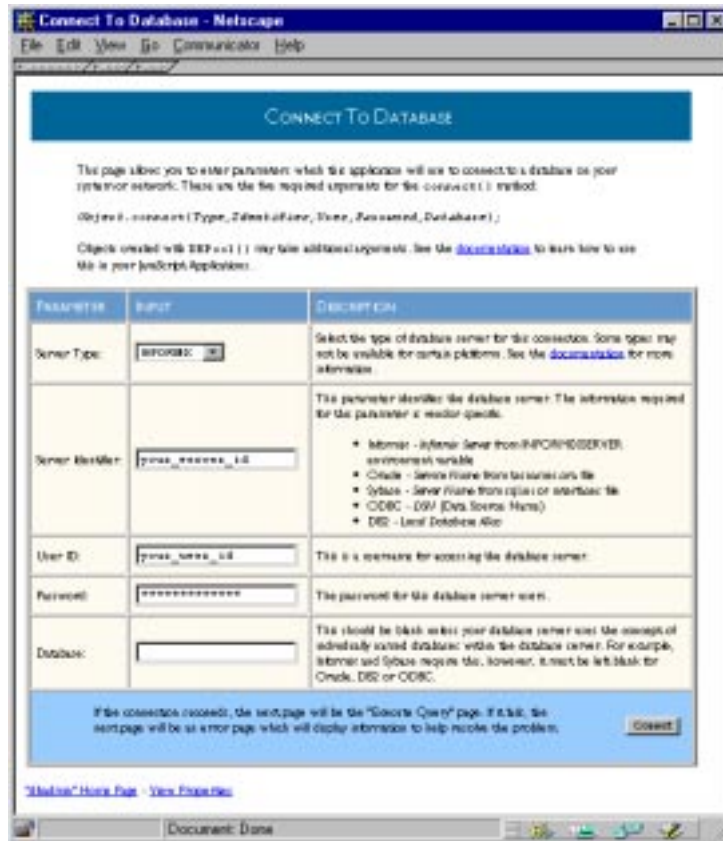

If this connection succeeds, the Execute Query page appears. In this case, your database is properly configured for working with the LiveWire Database Service. If the connection fails, the Database Connect Error page appears. In this case, make sure you've followed the instructions for your particular database and hardware configuration.

Supported Database Clients and ODBC Drivers

The following table summarizes the specific database vendors supported on each platform for Netscape Enterprise Server 3.x. These database vendors are not supported for the FastTrack Edition server.

Table 10-1 Database vendor client libraries supported on each platform by Netscape Enterprise Server

Database Vendor	AIX	DEC	Irix 6.2	HP-UX 11.0	Solaris 2.5.1/2.6	Windows NT 4.0 w/ SP4
DB2	CAE 2.1.2	Not supported	Not supported	V5.2	V5.2	V5.2
Informix	Informix Client 7.22	Informix Client 7.22	Informix Client 7.22	SDK 2.10 (ESQL 9.16)	SDK 2.10 (ESQL 9.16)	SDK 2.10 TC1 (ESQL 9.16)
Microsoft ODBC	ODBC Mgr Visigenic 2.0	Not supported	ODBC Mgr Visigenic 2.0	Not supported	Supported on Solaris 2.5.1 only	MS SQL Server 6.5 (3.60 driver)
						SQL Anywhere 5.5 (5.00 driver)
						MS Access 7.0 (3.51.171300 Driver)
Oracle ¹	Oracle Client 7.3.x	Oracle Client 7.3.x	Oracle Client 7.3.x	Oracle Client 8.0.5	Oracle Client 8.0.5	Oracle Client 8.0.5
Sybase	Open Client /C 11.1	Open Client /C 11.1	Open Client /C 11.1	11.1.1	11.1.1	11.1.1

1. Oracle SQL*Net version 1.1 is no longer supported.

The following table summarizes the specific database vendors supported on each platform for iPlanet Web Server 4.x. These database vendors are not supported for the FastTrack Edition server.

Table 10-2 Database vendor client libraries supported on each platform by iPlanet Web Server

Database Vendor	Solaris Sparc 2.6, 7, and 2.8 beta	Solaris x86 (DE only)	Win NT 4.0 SP5	HPUX 11.0	AIX 4.3.2	DEC 4.0D	Linux RedHat 6.0 ¹	IRIX 6.5
Informix Client SDK Server 7.3	2.10	2.3	2.10	2.10 HC2	2.10	2.10	2.10	2.10
Oracle Client SDK Server 8.0.5	8.0.5	--	8.0.5	8.0.5	8.0.5	8.0.5	8.0.5	8.0.5
Sybase Client SDK Server 11.9.2	11.1.1	--	11.1.1	11.1.1	11.1.1	11.1.1	11.9.2	11.1.1
DB2 Client SDK Server 5.2	5.2	--	5.2	5.2	5.2	5.2	6.1	5.2
ODBC 3.51 MCAD 2.0 SP2	--	--	--	MS SQL Server 7.0	--	--	--	--

1. Supported in iPlanet Web Server version 4.1 only.

The following table summarizes support for ODBC on Windows NT for iPlanet Web Server.

Table 10-3 Windows NT ODBC Support

ODBC Component	Windows NT 4.0 SP4
ODBC Manager	MS ODBC Manager 3.51 MCAD 2.0 SP2
ODBC Drivers	
MS SQL Server 6.5	MS SQL Server Driver 3.60 (sqlsrv32.dll)
MS Access 7.0	MS Access Driver 3.51.171300 (odbcjt32.dll)
Sybase SQL Anywhere 5.5	Sybase SQL Anywhere Driver 5.00.0003 (wod50t.dll)

Note that ODBC is not supported on Unix platforms.

NOTE

Visigenic no longer enhances their existing ODBC drivers or SDK products. Instead, Visigenic has selected INTERSOLV to provide an upgrade path for these drivers and products. (For information, see <http://www.intersolv.com/newsstand/pr9711191.htm>). Visigenic will provide a document covering the operational differences between Visigenic and INTERSOLV ODBC drivers.

The following table lists the capabilities of the supported ODBC drivers on NT.

Table 10-4 ODBC driver capabilities on NT

SQL Database	Connect	SQL passthrough	Read-only cursor	Updatable cursor	Stored procedures
MS-SQL Server 6.5	Yes	Yes	Yes	Yes	Yes
Sybase SQL Anywhere	Yes	Yes	Yes	Yes	Not tested
Access	Yes	Yes	Yes	No	N/A

Note that ODBC drivers are not supported for Unix platforms.

DB2

To use a DB2 server, you must have iPlanet Web Server, Enterprise Edition. You cannot access DB2 from the FastTrack Edition.

All platforms: Install the DB2 client, version 2.1.2. For Solaris, you need APAR #JR10150. For information, see the DB2 documentation at <http://www.software.ibm.com/data/db2/>.

If the database and web server are on different machines: To determine if you can connect to the DB2 server, you can issue the following command from the DB2 command line:

```
DB2 TERMINATE # this command allows the catalog command to take
effect
DB2 CONNECT TO databasename USERID userid USING password
```

If you use the BLOB or CLOB data types in your application, you must set the longdatacompat option in your \$DB2PATH/db2cli.ini file to 1. For example:

```
[Database name]
longdatacompat=1
```

If you make changes to the db2cli.ini file, you must restart your web server for them to take effect.

Unix only: You must set the following environment variables:

DB2INSTANCE	Specifies the name of the connection port defined on both the server and client. This name is also in the dbm configuration file for the SVCENAME configuration parameter.
DB2PATH	Specifies the top-level directory in which DB2 is installed. For example: /home/\$DB2INSTANCE/sql1lib
DB2COMM	Verify that this variable specifies the protocol that will be used. For example: DB2COMM=TCPIP
PATH	Must include \$DB2PATH/misc:\$DB2PATH/adm:\$DB2PATH/bin
LD_LIBRARY_PATH	(Solaris and Irix) Must include the DB2 lib directory. For example, on Solaris it must include /opt/IBMd2/v2.1/lib.

SHLIB_PATH	(HP-UX) Must include the DB2 lib directory.
LIBPATH	(AIX) Must include the DB2 lib directory.

Informix

To use an Informix server, you must have iPlanet Web Server Enterprise Edition. You cannot access Informix from the FastTrack Edition.

If the database and the web server are on different machines, follow the instructions in “Informix Remote.”

If the database and the web server are on the same machine, follow the instructions in “Informix Local.”

Informix Remote

Unix only: Install an Informix ESQL/C Runtime Client 7.22 (also called Informix I-Connect) and then set the following environment variables:

INFORMIXDIR	Specifies the top-level directory in which Informix is installed.
INFORMIXSERVE R	Specifies the name of your default Informix server.
INFORMIXSQLHO STS	Specifies the path of the <code>sqlhosts</code> file if you move it somewhere other than <code>\$INFORMIXDIR/etc/sqlhosts</code> . You do not need to set this variable if you leave the <code>sqlhosts</code> file in this directory.
SHLIB_PATH	(HP-UX) Must include <code>\$INFORMIXDIR/lib</code> and <code>\$INFORMIXDIR/lib/esql</code> .

You must also modify `$INFORMIXDIR/etc/sqlhosts` to match the service name in the `/etc/services` file. For information on how to do so, see your Informix documentation.

NT only: Install an Informix ESQL/C Runtime Client 7.20 (also called Informix I-Connect.) During installation all necessary environment variables are set. You use the appropriate Informix utility to enter the necessary information about the remote server you wish to connect to.

If you run your web Server as a System, be sure that you have run `regcopy.exe`.

All platforms: Depending on your name service, you may also need to edit the appropriate file to add the IP address of the remote host machine you are connecting to. On NT, this file is `winnt\system32\drivers\etc\hosts` file under the NT SystemRoot. On Unix, this file is `/etc/hosts`.

In the same directory, add the following line to the `services` file:

```
ifmx_srvc port/tcp # Informix Online Server
```

where *ifmx_srvc* is the name of your service and *port* is its port number. The port number must match the port on the remote machine that the Informix server listens to. To make this line valid, you must either insert at least one space after `tcp` or place a comment at the end of the line. For example, if your Informix service is named `ifmx1` and the port number is 1321, you add this line:

```
ifmx1 1321/tcp # Informix Online Server
```

Informix Local

If you install Informix locally, you must install the Informix client before you install the Informix server.

Unix only: If you use 7.22 Online Server for Unix, the installation process creates the appropriate directory structure and `sqlhosts` file. You must set the environment variables as for a remote server.

NT only: You should install the Online Server 7.20. This installs the client; no additional steps are necessary. If you run your web Server as a System, be sure that you have run `regcopy.exe`.

ODBC

All platforms: For information on the capabilities of the supported ODBC drivers, see “Supported Database Clients and ODBC Drivers.”

You need to have the appropriate ODBC drivers for the database you are connecting to. You also need to have additional ODBC connectivity files.

Most software products that provide ODBC connectivity supply an ODBC driver or drivers and ODBC connectivity.

NT only: Currently Netscape has certified with ODBC Manager version 2.5. If you have access to an ODBC driver, but not to the ODBC connectivity files, you can obtain them from the MS ODBC SDK. To get updated files for Access, Foxpro, and Excel, you may need patch WX1350 from Microsoft.

Unix only: For ODBC on Unix, you can use either the driver from Visigenic or from OpenLink. If you’re using the Visigenic driver, follow the instructions in “Visigenic ODBC Driver (Unix only).” If you’re using the OpenLink driver, follow the instructions in “OpenLink ODBC Driver (Solaris only).”

ODBC Data Source Names (NT only)

Two types of data sources can be created:

- System DSN: If you’re using a system DSN, the web server must be started using the System account.
- User DSN: If you’re using a user DSN, the web server must be started using an appropriate NT user account.

The data source describes the connection parameter for each database needing ODBC connectivity. The data source is defined using the ODBC administrator. When ODBC is installed, an administrator is also installed. Each ODBC driver requires different pieces of information to set up the data source.

OpenLink ODBC Driver (Solaris only)

Install the request broker, OpenLink Workgroup Edition ODBC Driver, on the database server. This must be running before you can connect to the database using the OpenLink request agent.

Install the request agent, in OpenLink Generic ODBC client version 1.5, on the database client machine.

Rename or copy the request agent's driver manager file from `libiodbc.so` to `libodbc.so` in the `$ODBCDIR/lib` directory, where `$ODBCDIR` is the directory in which ODBC is installed.

When you installed your server, you installed it to run as some user, either `root`, `nobody`, or a particular server user. The user you pick must have a real home directory, which you may have to create. For example, the default home directory for the `nobody` user on Irix is `/dev/null`. If you install your server on Irix as `nobody`, you must give the `nobody` user a different home directory.

In that home directory, you must have an `.odbc.ini` file. For example, if you run the server as `root`, this file is under the root (`/`) directory.

Set the following environment variables:

<code>LD_LIBRARY_PATH</code>	(Solaris and Irix) Add the location of the ODBC libraries to this variable.
<code>UDBCINI</code>	Specifies the location of the <code>.odbc.ini</code> file.

Visigenic ODBC Driver (Unix only)

When you installed your server, you installed it to run as some user, either root, nobody, or a particular server user. The user you pick must have a real home directory, which you may have to create. For example, the default home directory for the nobody user on Irix is `/dev/null`. If you install your server on Irix as nobody, you must give the nobody user a different home directory.

In that home directory, you must have an `.odbc.ini` file. For example, if you run the server as root, this file is under the root (`/`) directory.

Set the following environment variable:

<code>LD_LIBRARY_PATH</code>	(Solaris and Irix) Add the location of the ODBC libraries to this variable. In the preceding example, this would be <code>/u/my-user/odbcsdk/lib</code> .
<code>SHLIB_PATH</code>	(HP-UX) Add the location of the ODBC libraries to this variable.
<code>LIBPATH</code>	(AIX) Add the location of the ODBC libraries to this variable.

NOTE

Visigenic no longer enhances their existing ODBC drivers or SDK products. Instead, Visigenic has selected INTERSOLV to provide an upgrade path for these drivers and products. (For information, see <http://www.intersolv.com/newsstand/pr9711191.htm>). Visigenic will provide a document covering the operational differences between Visigenic and INTERSOLV ODBC drivers.

Oracle

To use an Oracle server, you must have iPlanet Web Server, Enterprise Edition. You cannot access Oracle from the FastTrack Edition.

If the database and the web server are on different machines, follow the instructions in “Oracle Remote.”

If the database and the web server are on the same machine, follow the instructions in “Oracle Local.”

Unix only: Make sure you can connect to your Oracle database via SQL*Net. When you have finished installation, you can use a loopback test to verify that you connected correctly. For example, from within `sqlplus`, you can try to connect to your database with the following command:

```
connect username/password@service_name
```

Or, from the Unix command line, you could use this command:

```
sqlplus username/password@service_name
```

In these commands, you use the `service_name` from your `tnsnames.ora` file.

Oracle Remote

NT only: You must install the Oracle 7.3.2 client software for NT. Oracle 7.1 and 7.2 clients are not supported. You must also create the Oracle configuration files using the appropriate Oracle configuration utility.

Unix only: Before you can connect to Oracle under Irix, you must have the appropriate Irix patches. See *Enterprise Server 3.x Release Notes* for information on the patches you need.

You must install the Oracle 7.3.x client software for Unix. Oracle 7.1 and 7.2 clients are not supported.

You must set the following environment variables:

ORACLE_HOME	Specifies the top-level directory in which Oracle is installed.
TNS_ADMIN	Specifies the location of configuration files, for example, <code>\$ORACLE_HOME/network/admin</code> . After installation Oracle creates the configuration files under <code>/var/opt/oracle</code> . If <code>listener.ora</code> and <code>tnsnames.ora</code> are in this directory, you might not need to set <code>TNS_ADMIN</code> , because by default Oracle uses <code>/var/opt/oracle</code> .

If you do not set these environment variables properly, Oracle returns the ORA-1019 error code the first time you attempt to connect. For information on error handling, see Chapter 12, “Error Handling for LiveWire.”

Oracle Local

Unix only: Before you can connect to Oracle under Irix, you must have the appropriate Irix patches. See *Enterprise Server 3.x Release Notes* for information on the patches you need.

All platforms: You must install an Oracle Workgroup, Enterprise Server 7.3.2 (NT), or Enterprise Server 7.3.x (Unix). Oracle 7.1 and 7.2 clients are not supported. Check with your server vendor to verify that the Oracle server version is compatible with the Oracle client.

You must set the following environment variables:

ORACLE_HOME	Specifies the top-level directory in which Oracle is installed.
ORACLE_SID	Specifies the Oracle System Identifier.

When your Oracle database server is local, you must pass the empty string as the second argument to the `connect` method of the `database` or `DbPool` object or to the `DbPool` constructor. This way, those methods use the value of the `ORACLE_SID` environment variable. For example:

```
connobj.connect ("ORACLE", "" "user", "password", "");
```

For more information on Oracle installation, see Oracle's documentation.

Sybase

To use a Sybase server, you must have iPlanet Web Server, Enterprise Edition. You cannot access Sybase from the FastTrack Edition.

If the database and the web server are on different machines, follow the instructions in "Sybase Remote."

If the database and the web server are on the same machine, follow the instructions in "Sybase Local."

In addition, if you're using a Unix platform and Sybase has a multithreaded driver for that platform, follow the instructions in "Sybase (Unix only)." See *Enterprise Server 3.x Release Notes* for a list of the Unix platforms on which Sybase has a multithreaded driver.

Sybase Remote

Unix only: Set the following environment variable:

SYBASE	The top-level directory in which Sybase is installed
LD_LIBRARY_PATH	(DEC) Must include \$SYBASE/lib.
TH	

For Solaris, you must also follow the instructions in “Sybase (Unix only).”

All platforms: You must install SYBASE Open Client/C. Supported versions are listed in “Supported Database Clients and ODBC Drivers.”

You can use the appropriate Sybase utility to enter, in the `sql.ini` file (NT) and the `interfaces` file (all platforms), the information about the remote server you want to connect to. For more information, see your Sybase documentation.

Sybase Local

Unix only: Set the following environment variable:

<code>SYBASE</code>	The top-level directory in which Sybase is installed
<code>LD_LIBRARY_PATH</code>	(DEC) Must include <code>\$SYBASE/lib</code> .

For Solaris, you must also follow the instructions in “Sybase (Unix only).”

All platforms: Install a Sybase SQL Server, version 11.1; the client portion is installed with the server. Supported versions are listed in “Supported Database Clients and ODBC Drivers.”

You can use the appropriate Sybase utility to enter the information about the remote server you want to connect to in the `sql.ini` file (NT) and the `interfaces` file (all platforms). For more information, see your Sybase documentation.

Sybase (Unix only)

On some Unix platforms, Sybase has both a single-threaded driver and a multithreaded driver. If Sybase has a multithreaded driver for a particular Unix machine, you must use the multithreaded driver with LiveWire. On these platforms, your web server will behave unpredictably with the single-threaded driver. This requirement applies for both a local and a remote connection. It does not apply to Windows platforms.

See *Enterprise Server 3.x Release Notes* for a list of the Unix platforms on which Sybase has a multithreaded driver.

To ensure that you use the multithreaded driver, you must edit your `$SYBASE/config/libtcl.cfg` file. This file contains a pair of lines that enable either the single-threaded or the multithreaded driver. You must have one of these lines commented out and the other active. For example, on Solaris locate these lines:

```
[DRIVERS]
;libtli.so=tcp unused ; This is the nonthreaded tli driver.
libtli_r.so=tcp unused ; This is the threaded tli driver.
```

Make sure that the line for the single-threaded driver is commented out and that the line for the multithreaded driver is not commented out. The filename differs on each platform, but the lines are always in the DRIVERS section and are always commented to indicate which is the single-threaded and which the multithreaded driver.

NOTE

If you wish to use the Sybase `isql` utility, you must use the nonthreaded `tli` driver. In this case, the line for `libtli_r.so` must be commented out. For information on using this driver, see your Sybase documentation.

Sybase

Data Type Conversion

This chapter describes how the JavaScript runtime engine on the server converts between the more complex data types used in relational databases and the simpler ones defined for JavaScript.

This chapter contains the following sections:

- About Data Type Conversion
- Working with Dates and Databases
- Data-Type Conversion by Database

About Data Type Conversion

Databases have a rich set of data types. The JavaScript runtime engine on the server converts these data types to JavaScript values, primarily either strings or numbers. A JavaScript number is stored as a double-precision floating-point value. In general, the runtime engine converts character data types to strings, numeric data types to numbers, and dates to JavaScript `Date` objects. It converts null values to JavaScript null.

NOTE

Because JavaScript does not support fixed or packed decimal notation, some precision may be lost when reading and writing packed decimal data types. Be sure to check results before inserting values back into a database, and use appropriate mathematical functions to correct for any loss of precision.

Working with Dates and Databases

Date values retrieved from databases are converted to JavaScript Date objects. To insert a date value in a database, use a JavaScript Date object, as follows:

```
cursorName.dateColumn = dateObj
```

Here, `cursorName` is a cursor, `dateColumn` is a column corresponding to a date, and `dateObj` is a JavaScript Date object. You create a Date object using the new operator and the Date constructor, as follows:

```
dateObj = new Date(dateString)
```

where `dateString` is a string representing a date. If `dateString` is the empty string, it creates a Date object for the current date. For example:

```
custs.orderDate = new Date("Jan 27, 1997")
```

NOTE

DB2 databases have time and timestamp data types. These data types both convert to the Date type in JavaScript.

CAUTION

The LiveWire Database Service cannot handle dates after February 5, 2037.

Data-Type Conversion by Database

The following table shows the conversions made by the JavaScript runtime engine for DB2 databases.

Table 11-1 DB2 data-type conversions

DB2 Data Type	JavaScript Data Type
<code>char(n)</code> , <code>varchar(n)</code> , <code>long varchar</code> , <code>clob(n)</code>	string
<code>integer</code> , <code>smallint</code>	integer

Table 11-1 DB2 data-type conversions (Continued)

DB2 Data Type	JavaScript Data Type
decimal, double	double
date, time, timestamp	Date
blob	Blob

The following table shows the conversions made by the JavaScript runtime engine for Informix databases.

Table 11-2 Informix data-type conversions

Informix Data Type	JavaScript Data Type
char, nchar, text, varchar, nvarchar	string
decimal(p,s), double precision, float, integer, money(p,s), serial, smallfloat, smallint	number
date, datetime ¹	Date
byte	Blob
interval	Not supported

1. The Informix `datetime` data type has variable precision defined by the user. Server-side JavaScript displays `datetime` data with the format of YEAR to SECOND. If a `datetime` variable has been defined with another precision, such as MONTH to DAY, it may display incorrectly. In this situation, the data is not corrupted by the incorrect display.

ODBC translates a vendor's data types to ODBC data types. For example, the Microsoft SQL Server `varchar` data type is converted to the ODBC `SQL_VARCHAR` data type. For more information, see the ODBC SDK documentation. The following table shows the conversions made by the JavaScript runtime engine for ODBC databases.

Table 11-3 ODBC data-type conversions

ODBC Data Type	JavaScript Data Type
SQL_LONGVARCHAR, SQL_VARCHAR, SQL_CHAR	string
SQL_SMALLINT, SQL_INTEGER, SQL_DOUBLE, SQL_FLOAT, SQL_REAL, SQL_BIGINT, SQL_NUMERIC, SQL_DECIMAL	number
SQL_DATE, SQL_TIME, SQL_TIMESTAMP	Date
SQL_BINARY, SQL_VARBINARY, SQL_LONGBINARY	Blob

The following table shows the conversions made by the JavaScript runtime engine for Oracle databases.

Table 11-4 Oracle data-type conversions

Oracle Data Type	JavaScript Data Type
long, char(n), varchar2(n), rowid	string
number(p,s), number(p,0), float(p)	number
date	Date
raw(n), long raw	Blob

The following table shows the conversions made by the JavaScript runtime engine for Sybase databases.

Table 11-5 Sybase data-type conversions

Sybase Data Type	JavaScript Data Type
char(n), varchar(n), nchar(n), nvarchar(n), text	string
bit, tinyint, smallint, int, float(p), double precision, real, decimal(p,s), numeric(p,s), money, smallmoney	number ¹
datetime, smalldatetime	Date
binary(n), varbinary(n), image	Blob

1. The Sybase client restricts numeric data types to 33 digits. If you insert a JavaScript number with more digits into a Sybase database, you'll get an error.

Error Handling for LiveWire

This chapter describes the types of errors you can encounter when working with relational databases.

This chapter contains the following sections:

- Checking for Error Conditions
- Return Values
- Error Methods
- Status Codes

Checking for Error Conditions

When writing a JavaScript application, you should be aware of the various error conditions that can occur. In particular, when you use the LiveWire Database Service to interact with a relational database, errors can occur for a variety of reasons. For example, SQL statements can

fail because of referential integrity constraints, lack of user privileges, record or table locking in a multiuser database, and so on. When an action fails, the database server returns an error message indicating the reason for failure.

Your code should check for error conditions and handle them appropriately.

Return Values

The return value of the methods of the LiveWire objects may indicate whether or not an error occurred. Methods can return values of various types. Depending on the type, you can infer different information about possible errors.

Number

When a method returns a number, the return value can either represent an actual numeric value or a status code. For example, `Cursor.columns` returns the number of columns in a cursor, but `Cursor.updateRow` returns a number indicating whether or not an error occurred.

The `Cursor.columns` and `ResultSet.columns` methods return an actual numeric value. The following methods return a numeric value that indicates a status code:

```
Connection.beginTransaction
Connection.commitTransaction
Connection.execute
Connection.majorErrorCode
Connection.minorErrorCode
Connection.release
Connection.rollbackTransaction
Connection.SQLTable
Cursor.close
Cursor.deleteRow
Cursor.insertRow
Cursor.updateRow
DbPool.connect
DbPool.disconnect
DbPool.majorErrorCode
DbPool.minorErrorCode
DbPool.storedProcArgs
ResultSet.close
Stproc.close
```

If the numeric return value of a method indicates a status code, 0 indicates successful completion and a nonzero number indicates an error. If the status code is nonzero, you can use the `majorErrorCode` and `majorErrorMessage` methods of the associated `Connection` or `DbPool` object to find out information about the error. In some cases, the `minorErrorCode` and `minorErrorMessage` methods provide additional information about the error. For information on the return values of these error methods, see “Error Methods.”

Object

When a method returns an object, it can either be a real object or it can be null. If the method returns null, a JavaScript error probably occurred. In most cases, if an error occurred in the database, the method returns a valid object, but the software sets an error code.

The `blob` global function returns an object. In addition, the following methods return an object:

```
Connection.cursor  
Connection.storedProc  
DbPool (constructor)  
DbPool.connection  
Stproc.resultSet
```

Whenever you create a cursor, result set, or stored procedure, you should check for both the existence of the created object and for a possible return code. You can use the `majorErrorCode` and `majorErrorMessage` methods to examine an error.

For example, you might create a cursor and verify its correctness with code similar to the following:

```
// Create the Cursor object.
custs = connobj.cursor ("select id, name, city
    from customer order by id");
// Before continuing, make sure a real cursor was returned
// and there was no database error.
if ( custs && (connobj.majorErrorCode() == 0) ) {
    // Get the first row
    custs.next();
    // ... process the cursor rows ...
    //Close the cursor
    custs.close();
}
else
    // ... handle the error condition ...
```

Boolean

The following methods return Boolean values:

```
Connection.connected
Cursor.next
DbPool.connected
Resultset.next
```

When a method returns a Boolean value, `true` usually indicates successful completion, whereas `false` indicates some other condition. A return value of `false` does not indicate an actual error; it may indicate a successful termination condition.

For example, `Connection.connected` returns `false` to indicate the `Connection` object is not currently connected. This can mean that an error occurred when the `Connection` object was created, or it can indicate that a previously used connection was intentionally disconnected. Neither of these is an error of the `connected` method. If an error occurred when the connection was created, your code should catch the error with that method. If the connection was terminated, you can reconnect.

As a second example, `Cursor.next` returns `false` when you get to the end of the rows in the cursor. If the `SELECT` statement used to create the `Cursor` object finds the table but no rows match the conditions of the `SELECT` statement, then an empty cursor is created. The first time you call the `next` method for that cursor, it returns `false`. Your code should anticipate this possibility.

String

When a method returns a string, you usually do not get any error information. If, however, the method returns null, check the associated error method.

The following methods return a string:

```
Connection.majorErrorMessage  
Connection.minorErrorMessage  
Cursor.columnName  
DbPool.majorErrorMessage  
DbPool.minorErrorMessage  
ResultSet.columnName
```

Void

Some methods do not return a value. You cannot tell anything about possible errors from such methods. The following methods do not return a value:

```
Connection.release  
Cursor.close  
DbPool.disconnect  
ResultSet.close
```

Error Methods

As discussed earlier, many methods return a numeric status code. When a method returns a status code, there may be a corresponding error code and message from the database server. LiveWire provides four methods for the `Connection` and `DbPool` objects to access database error codes and messages. The methods are:

- `majorErrorMessage`: major error message returned by the database.
- `minorErrorMessage`: secondary message returned by the database.
- `majorErrorCode`: major error code returned by the database. This typically corresponds to the server's `SQLCODE`.
- `minorErrorCode`: secondary error code returned by the database.

The results returned by these methods depend on the database server being used and the database status code. Most of the time you need to consider only the major error code or error message to understand a particular error. The minor error code and minor error message are used in only a small number of situations.

NOTE

Calling another method of `Connection` or `DbPool` can reset the error codes and messages. To avoid losing error information, be sure to check these methods before proceeding.

After receiving an error message, your application may want to display a message to the user. Your message may include the string returned by `majorErrorMessage` or `minorErrorMessage` or the number returned by `majorErrorCode` or `minorErrorCode`. Additionally, you may want to process the string or number before displaying it.

In computing the string returned by `majorErrorMessage` and `minorErrorMessage`, LiveWire returns the database vendor string, with additional text prepended. For details on the returned text, see the descriptions of these methods in the *Server-Side JavaScript Reference*.

Status Codes

The following table lists the status codes returned by various methods. iPlanet recommends that you do not use these values directly. Instead, if a method returns a nonzero value, use the associated `majorErrorCode` and `majorErrorMessage` methods to determine the particular error.

Table 12-1 Status codes for LiveWire methods

Status Code	Explanation	Status Code	Explanation
0	No error	14	Null reference parameter
1	Out of memory	15	database object not found (for backward compatibility with older applications)
2	Object never initialized	16	Required information is missing
3	Type conversion error	17	Object cannot support multiple readers
4	Database not registered	18	Object cannot support deletions
5	Error reported by server	19	Object cannot support insertions
6	Message from server	20	Object cannot support updates
7	Error from vendor's library	21	Object cannot support updates
8	Lost connection	22	Object cannot support indices
9	End of fetch	23	Object cannot be dropped
10	Invalid use of object	24	Incorrect connection supplied
11	Column does not exist	25	Object cannot support privileges

Table 12-1 Status codes for LiveWire methods (Continued)

Status Code	Explanation	Status Code	Explanation
12	Invalid positioning within object (bounds error)	26	Object cannot support cursors
13	Unsupported feature	27	Unable to open

Videoapp Sample Application

This chapter describes the videoapp sample application, which illustrates the use of the LiveWire Database Service. It describes how to configure your environment to run the videoapp sample application.

This chapter contains the following sections:

- About the Videoapp Sample Application
- Configuring Your Environment
- Running Videoapp
- Looking at the Source Files

About the Videoapp Sample Application

Netscape servers come with a sample database application, `videoapp`, which illustrates the LiveWire Database Service. This application tracks video rentals at a fictional video store. The `videoapp` application demonstrates the use of the `DbPool` and `Connection` objects.

There are a small number of restrictions on the use of these applications:

- While these sample applications can be used with ODBC and SQL Server, if the driver on your platform does not support updatable cursors, the applications will not work. For information on which drivers support updatable cursors, see “Supported Database Clients and ODBC Drivers.”
- The `videoapp` application uses cursors that span multiple HTML pages. If your database driver is single-threaded, these cursors may hold locks on the database and prevent other users from accessing it. For information on which database drivers are single-threaded, see the *Enterprise Server 3.x Release Notes*.

Configuring Your Environment

Before you can run these applications, you must make minor changes to the source files and create a database of videos. This section tells you which files you must change and which procedures you use to make these changes and to create the database for each of the supported database servers. See the section for your database server for specific information.

NOTE

Your database server must be up and running before you can create your video database, and you must configure your database server and client as described in Chapter 10, “Configuring Your Database.”

In addition, the database-creation scripts use database utilities provided by your database vendor. You should be familiar with how to use these utilities.

Connecting to the Database and Recompiling

The `videoapp` application is in the `$NSHOME\plugins\samples\js\videoapp` directory, where `$NSHOME` is the directory in which you installed the iPlanet Web Server.

For each application, you must change the connect string in the HTML source file, `start.htm`, to match your database environment. For information on the parameters you use to connect, see “Database Connection Pools.” For even more information, see the description of the connect method in the *Server-Side JavaScript Reference*.

For the `videoapp` application, change this line:

```
project.sharedConnections.pool =  
    new DbPool ("<Server Type>", "<Server Identifier>",  
        "<User>", "<Password>", "<Database>", 2, false)
```

Save your changes and recompile the application. To recompile one of the applications from the command line, run its build file, located in the application's directory. Be sure your `PATH` environment variable includes the path to the compiler (usually `$NSHOME\bin\https\bin` on Windows NT and `$NSHOME\bin\https\lib` on Unix).

Restart the application in the JavaScript Application Manager.

Creating the Database

The creation scripts for `videoapp` are in its application directory. The first time you run the scripts you might see errors about dropping databases or tables that do not exist. These error messages are normal; you can safely ignore them.

Informix

Before using the following instructions, you must configure your Informix client as described in "Informix." In addition, make sure your `PATH` environment variable includes `$INFORMIXDIR\bin` and that your client is configured to use the Informix utilities.

The SQL files for creating the video database (`lw_video`) on Informix are in this directory:

```
$NSHOME\plugins\samples\js\videoapp\ifx
```

NOTE

Remember that path names in this manual are given in NT format if they are for both NT and Unix. On Unix, you would use `$NSHOME/js/samples/videoapp/ifx`.

1. On Unix, log in as "informix" user and run the `ifx_load.csh` shell script for `videoapp`.

On NT, in the Informix Server program group, double-click the Command-Line Utilities icon to open a DOS window, and then run the following commands:

```
cd c:\netscape\server\plugins\samples\js\videoapp\ifx
ifx_load.bat
```

2. You can now run the application by making the changes described in "Connecting to the Database and Recompiling."

Oracle

Before using the following instructions, you must configure your Oracle client as described in “Oracle.” In addition, your client must be configured to run the Oracle utilities. To run SQLPlus, you may need to set the ORACLE_SID environment variable.

The SQL files for creating the video database on Oracle are in these two directories:

```
$NSHOME\plugins\samples\js\videoapp\ora
```

1. On both Unix and NT, start SQL Plus. From the `SQL>` prompt, enter this command:

```
Start $NSHOME\plugins\samples\js\videoapp\ora\ora_video.sql
```

This SQL script does not create a new database. Instead, it creates the Oracle tables in the current instance.

2. On Unix, run the `ora_load` script file to load the video tables with data. On NT, run the `ora_load.bat` batch file to load the video tables with data. You must edit the appropriate file to connect to your server; the instructions for doing so are in the file.
3. You can now run the application by making the changes described in “Connecting to the Database and Recompiling.”

Sybase

Before using the following instructions, you must configure your Sybase client as described in “Sybase.” In addition, on Unix be sure your `PATH` environment variable includes `$$SYBASE\bin` and set `DSQUERY` to point to your server.

The SQL files for creating the video database on Sybase are in these two directories:

```
$NSHOME\plugins\samples\js\videoapp\syb
```

1. Run the appropriate script from the command line. On Unix, the script is:

```
syb_video.csh userid password
```

For example:

```
$NSHOME\plugins\samples\js\videoapp\syb\syb_load.csh sa
```

On NT, the script is:

```
syb_load userid password
```

For example:

```
c:\netscape\server\plugins\samples\js\videoapp\syb\syb_load sa
```

2. You can now run the application by making the changes described in “Connecting to the Database and Recompiling.”

NOTE

If you have both Sybase and MS SQL Server or DB2 installed on your machine, there is a potential naming confusion. These vendors have utilities with the same name (`bcp` and `isql`). When running this script, be certain that your environment variables are set so that you run the correct utility.

Microsoft SQL Server (NT only)

Before using the following instructions, you must configure your Sybase client as described in “ODBC.” In addition on Unix, set `DSQUERY` to point to your server.

The SQL files for creating the video database on MS SQL Server are in these two directories:

```
$NSHOME\plugins\samples\js\videoapp\mss
```

1. From a DOS prompt, run this batch file:

```
mss_load userid password
```

For example:

```
c:\netscape\server\plugins\samples\js\videoapp\mss\mss_load sa
```

2. You can now run the application by making the changes described in “Connecting to the Database and Recompiling.”

NOTE

If you have both MS SQL Server and Sybase or DB2 installed on your machine, there is a potential naming confusion. These vendors have utilities with the same name (`bcp` and `isql`). When running this script, be certain that your environment variables are set so that you run the correct utility.

DB2

The SQL files for creating the video database on DB2 are in these two directories:

```
$NSHOME\plugins\samples\js\videoapp\db2
```

1. (Unix only) Your `PATH` environment variable must include the `$DB2PATH/bin`, `$DB2PATH/misc`, and `$DB2PATH/adm` directories.
2. Before you can run these scripts, you must have installed the DB2 Software Developer's Kit (DB2 SDK).
3. Also, before you can run the script to create the tables, you must edit it to modify some parameters. On Unix, the script is in `db2_load.csh`; on NT, it is in `db2_load.bat`. Edit the appropriate `db2_load` file and modify the following parameters to reflect your environment:
 - o `<nodename>`: node name alias
 - o `<hostname>`: host name of the node where the target database resides
 - o `<service-name>`: service name or instance name from the services file
 - o `<database-name>`: database name
 - o `<user>`: authorized user
 - o `<password>`: user's password
4. Make sure your `/etc/services` file has entries for your instance or service name if you are creating the database in a remote DB2 server.
5. Run the appropriate version of the script from the DB2 command window. The `db2_load` script runs the `db2_video.sql` and `import.sql` scripts. These subsidiary scripts create the video tables and load them with data from the `*.del` files. They do not create a new database. Instead, they create the DB2 tables in the local database alias specified in the `db2_load` script.

NOTE

If you have both DB2 and Sybase or MS SQL Server installed on your machine, there is a potential naming confusion. These vendors have utilities with the same name (`bcp` and `isql`). When running this script, be certain that your environment variables are set so that you run the correct utility.

Running Videoapp

In this section, you get the `videoapp` sample application up and running. This sample is significantly more complex than the samples discussed in Chapter 4, “Quick Start with the Sample Applications.” This chapter only gives an overview of it. You should look at some of the files to start familiarizing yourself with it.

Once you have created the video database and changed the database connection parameters, you can access the application here:

`http://server.domain/videoapp`

After connecting to the database, the Application Manager displays the `videoapp` home page, as shown in Figure 13-1.

Figure 13-1 Videoapp home page



If you cannot connect to the database, you see an error message. Make sure you have entered the correct database connection parameters as described in “Connecting to the Database and Recompiling” recompiled, and restarted the application.

The first thing you must do when you’re connected is to add a new customer. Until you have done this, there are no customers to use for any of the other activities.

You can use `videoapp` as a customer or as an administrator. As a customer, you can:

- Rent a movie
- Show all the movies you currently have rented

As an administrator, you can:

- Show all movies and who has them rented
- Return a video for a customer
- Add a new customer entry
- Delete a customer entry
- Modify a customer entry

Run the application and make a few choices to perform different actions.

Looking at the Source Files

The source HTML files for `videoapp`, listed in the following table, are copiously commented.

Table 0.6 Primary `videoapp` source files

<code>home.htm</code>	The application default page. Has links to <code>pick.htm</code> , <code>status.htm</code> , <code>rentals.htm</code> , <code>customer.htm</code> , and <code>delete.htm</code> . If not connected to the database, this page redirects the client to <code>start.htm</code> .
<code>start.htm</code>	Connects the application to the database, starts a transaction, and then redirects back to <code>home.htm</code> .
<code>abort.htm</code>	Cancels a transaction and begins a new transaction.
<code>save.htm</code>	Commits a transaction and begins a new transaction.

Table 0.6 Primary videoapp source files (Continued)

pick.htm	<p>Allows the customer to rent a movie. It contains frames for <code>category.htm</code>, <code>videos.htm</code>, and <code>pickmenu.htm</code>.</p> <p>The <code>category.htm</code> file displays video categories.</p> <p>The <code>videos.htm</code> file displays all videos in selected category, linked to <code>rent.htm</code> to rent a particular video.</p> <p>The <code>pickmenu.htm</code> file displays choices of other pages to visit.</p>
status.htm	<p>Displays the videos the customer currently has rented. If the customer has not selected an ID, redirects to <code>client.htm</code>, which lets the customer select the ID.</p>
rentals.htm	<p>Displays a list of all rented videos. When the administrator clicks on one, it submits the choice to <code>return.htm</code>, which performs the logic to return the video, then redirects back to <code>rentals.htm</code>.</p>
customer.htm	<p>Allows the administrator to add a new customer. Submits form input to <code>add.htm</code>, which performs logic to add a customer, then redirects back to <code>customer.htm</code>.</p>
delete.htm	<p>Allows the administrator to delete a customer. Displays a list of customers with links to <code>remove.htm</code>, which deletes the specified row from the customer table, then redirects back to <code>delete.htm</code>.</p>
modify.htm	<p>Allows the administrator to modify a customer entry. Displays a list of the first five customers with links to <code>modify1.htm</code> and <code>modify2.htm</code>. Those pages update a specific row in the customer table and then redirect back to <code>modify.htm</code>. The <code>modify3.htm</code> file displays additional customers five at a time.</p>

Application Architecture

This section orients you to the implementation of some of the functionality in `videoapp`. It describes only how the application works with the database and details the procedure for renting a movie. Other tasks are similar.

Connection and Workflow

When a user initiates a session with `videoapp` by accessing its default page (`home.htm`), `videoapp` checks whether it is already connected to the database. If so, `videoapp` assumes not only that the application is connected, but also that this user is already connected, and it proceeds from there.

If not connected, `videoapp` redirects to `start.htm`. On this page, it creates a single pool of database connections to be used by all customers, gets a connection for the user, and starts a database transaction for that connection. It then redirects back to `home.htm` to continue. The user never sees the redirection.

The database transaction started on `start.htm` stays open until the user explicitly chooses either to save or discard changes, by clicking the Save Changes or Abort Changes button. When the user clicks one of those buttons, `save.htm` or `abort.htm` is run. These pages commit or roll back the open transaction and then immediately start another transaction. In this way, the customer's connection always stays open.

Once it has a database connection, `videoapp` presents the main page to the user. From that page, the user makes various choices, such as renting a movie or adding a new customer. Each of those options involves displaying various pages that contain server-side JavaScript statements. Many of those pages include statements that use the connection to interact with the database, displaying information or making changes to the database.

The first thing you must do when you're connected is to add a new customer. Until you have done this, there are no customers to use for any of the other activities.

Renting a Movie

The `pick.htm` page contains a frameset for allowing a customer to rent a movie. The frameset consists of the pages `category.htm`, `videos.htm`, and `pickmenu.htm`.

The `category.htm` page queries the database for a list of the known categories of movie. It then displays those categories as links in a table in the left frame. If the user clicks one of those links, `videoapp` displays `video.htm` in the right frame. There are a few interesting things about the server-side code that accomplishes these tasks. If you look at this page early on, you see these lines:

```
var userId = unscramble(client.userId)
var bucket = project.sharedConnections.connections[userId]
var connection = bucket.connection
```

These statements occur in most of videoapp's pages. They retrieve the connection from where it is stored in the project object. The next line then gets a new cursor applicable for this task:

```
cursor = connection.cursor("select * from categories");
```

A variant of this statement occurs at the beginning of most tasks.

Here is the next interesting set of statements:

```
<SERVER>
...
while (cursor.next()) {
    catstr = escape(cursor.category)
</SERVER>
<TR><TD><A HREF=`"videos.htm?category=" + catstr`
TARGET="myright">
<SERVER>write(cursor.category);</SERVER></A>
</TD>
</TR>
<SERVER>
} // bottom of while loop
```

This loop creates a link for every category in the cursor. Notice this statement in particular:

```
<A HREF=`"videos.htm?category=" + catstr` TARGET="myright">
```

This line creates the link to videos.htm. It includes the name of the category in the URL. Assume the category is Comedy. This statement produces the following link:

```
<A HREF="videos.htm?category=Comedy" TARGET="myright">
```

When the user clicks this link, the server goes to `videos.htm` and sets the value of the request object's `category` property to `Comedy`.

The `videos.htm` page can be served either from `pick.htm` or from `category.htm`. In the first case, the `category` property is not set, so the page displays a message requesting the user choose a category. If the `category` property is set, `videos.htm` accesses the database to display information about all the movies in that category. This page uses the same technique as `category.htm` to construct that information and create links to the `rent.htm` page.

The `rent.htm` page actually records the rental for the customer. It gets information from the request and then updates a table in the database to reflect the new rental. This page performs the update, but does not commit the change. That doesn't happen until the user chooses `Save Changes` or `Abort Changes`.

The `pickmenu.htm` page simply displays buttons that let you either return to the home page or to the page for adding a new customer.

Modifying videoapp

As way of getting used to the LiveWire functionality, consider modifying `videoapp`. Here are some features you might add:

- Change the assumption that the existence of the `sharedConnections` array implies that this particular user is connected. You can change `start.htm` to check whether there is an ID for this user in that array and whether the connection stored in that location is currently valid. See “Sharing an Array of Connection Pools.”
- This application never releases connections back to the pool. Consequently, once a small number of users have connected, nobody else can connect. You can modify this in a couple of ways: add a new command that lets the user indicate completion or implement a scheme to cleanup unused connections. See “Retrieving an Idle Connection.”

Working with LiveConnect

LiveConnect Overview

LiveConnect Overview

This chapter describes using LiveConnect technology to let Java and JavaScript code communicate with each other. The chapter assumes you are familiar with Java programming.

This chapter contains the following sections:

- What Is LiveConnect?
- Working with Wrappers
- JavaScript to Java Communication
- Java to JavaScript Communication
- Data Type Conversions

For additional information on using LiveConnect, see the JavaScript technical notes on the iPlanet site, and also search for related information on the mozilla.org site.

What Is LiveConnect?

LiveConnect lets you connect server-side JavaScript applications to Java components or classes on the server.

Your JavaScript application may want to communicate with code written in other languages, such as Java or C. To communicate with Java code, you use JavaScript's LiveConnect functionality. To communicate with code written in other languages, you have several choices:

- You can wrap your code as a Java object and use LiveConnect directly.
- You can wrap your code as a CORBA-compliant distributed object and use LiveConnect in association with an object request broker.
- You can directly include external libraries in your application.

This chapter discusses using LiveConnect to access non-JavaScript code from JavaScript applications.

Ultimately, LiveConnect allows the JavaScript objects in your application to interact with Java objects. These Java objects are instances of classes on the server's CLASSPATH. See "Setting Up for LiveConnect" for information on setting CLASSPATH appropriately. LiveConnect works for both client-side and server-side JavaScript but has different capabilities appropriate to each environment.

This chapter assumes you are familiar with Java programming. For information on using Java with Netscape servers, see *Enterprise Server 3.0: Notes for Java Programmers*. For other information on LiveConnect, see the JavaScript documentation at:

<http://www.iplanet.com/docs/>

For all available Java classes, you can access static public properties or methods of the class, or create instances of the class and access public properties and methods of those instances. Unlike on the client, however, you can access *only* those Java objects that were created by your application or created by another JavaScript application and then stored as a property of the server object.

If a Java object was created by a server application other than a server-side JavaScript application, you cannot access that Java object. For example, you cannot access a Java object created by an NSAPI extension or an HTTP applet.

When you call a method of a Java object, you can pass JavaScript objects to that method. Java code can set properties and call methods of those JavaScript objects. In this way, you can have both JavaScript code that calls Java code and Java code that calls JavaScript code.

Java code can access a JavaScript application *only* in this fashion. That is, a Java object cannot invoke a JavaScript application unless that JavaScript application (or another JavaScript application) has itself accessed an appropriate Java object and invoked one of its methods.

Working with Wrappers

In JavaScript, a *wrapper* is an object of the target language data type that encloses an object of the source language. On the JavaScript side, you can use a wrapper object to access methods and fields of the Java object; calling a method or accessing a property on the wrapper results in a call on the Java object. On the Java side, JavaScript objects are wrapped in an instance of the class `netscape.javascript.JSObject` and passed to Java.

When a JavaScript object is sent to Java, the runtime engine creates a Java wrapper of type `JSObject`; when a `JSObject` is sent from Java to JavaScript, the runtime engine unwraps it to its original JavaScript object type. The `JSObject` class provides an interface for invoking JavaScript methods and examining JavaScript properties.

JavaScript to Java Communication

When you refer to a Java package or class, or work with a Java object or array, you use one of the special LiveConnect objects. All JavaScript access to Java takes place with these objects, which are summarized in the following table.

Table 14-1 The LiveConnect Objects

Object	Description
JavaScriptArray	A wrapped Java array, accessed from within JavaScript code.
JavaScriptClass	A JavaScript reference to a Java class.
JavaScriptObject	A wrapped Java object, accessed from within JavaScript code.
JavaScriptPackage	A JavaScript reference to a Java package.

NOTE

Because Java is a strongly typed language and JavaScript is weakly typed, the JavaScript runtime engine converts argument values into the appropriate data types for the other language when you use LiveConnect. See “Data Type Conversions” for complete information.

In some ways, the existence of the LiveConnect objects is transparent, because you interact with Java in a fairly intuitive way. For example, you can create a Java `String` object and assign it to the JavaScript variable `myString` by using the `new` operator with the Java constructor, as follows:

```
var myString = new java.lang.String("Hello world")
```

In the previous example, the variable `myString` is a `JavaScriptObject` because it holds an instance of the Java object `String`. As a `JavaScriptObject`, `myString` has access to the public instance methods of `java.lang.String` and its superclass, `java.lang.Object`. These Java methods are available in JavaScript as methods of the `JavaScriptObject`, and you can call them as follows:

```
myString.length() // returns 11
```

You access constructors, fields, and methods in a class with the same syntax that you use in Java. For example, the following JavaScript code uses properties of the `request` object to create a new instance of the `Bug` class and then assigns that new instance to the JavaScript variable `bug`. Because the Java class requires an integer for its first field, this code first converts the `request` string property to an integer before passing it to the constructor.

```
var bug = new Packages.bugbase.Bug(  
    parseInt(request.bugId),  
    request.bugPriority,  
    request);
```

The Packages Object

If a Java class is not part of the `java`, `sun`, or `netscape` packages, you access it with the `Packages` object. For example, suppose the Redwood corporation uses a Java package called `redwood` to contain various Java classes that it implements. To create an instance of the `HelloWorld` class in `redwood`, you access the constructor of the class as follows:

```
var red = new Packages.redwood>HelloWorld()
```

You can also access classes in the default package (that is, classes that don't explicitly name a package). For example, if the `HelloWorld` class is directly in the `CLASSPATH` and not in a package, you can access it as follows:

```
var red = new Packages>HelloWorld()
```

The LiveConnect `java`, `sun`, and `netscape` objects provide shortcuts for commonly used Java packages. For example, you can use the following:

```
var myString = new java.lang.String("Hello world")
```

instead of the longer version:

```
var myString = new Packages.java.lang.String("Hello world")
```

For Netscape Enterprise Server 3.x, by default, the `$NSHOME\js\samples` directory is in the server's `CLASSPATH`. (`$NSHOME` is the directory in which the server was installed.) You can put your packages in this directory.

For iPlanet Web Server 4.x, you can choose to put your Java packages and classes in any directory. Make sure that the directory is specified in the `jvm.classpath` parameter in the `jvm12.conf` file.

Working with Java Arrays

When any Java method creates an array and you reference that array in JavaScript, you are working with a `JavaArray`. For example, the following code creates the `JavaArray` `x` with ten elements of type `int`:

```
theInt = java.lang.Class.forName("java.lang.Integer")
x = java.lang.reflect.Array.newInstance(theInt, 10)
```

Like the JavaScript `Array` object, `JavaArray` has a `length` property which returns the number of elements in the array. Unlike `Array.length`, `JavaArray.length` is a read-only property, because the number of elements in a Java array are fixed at the time of creation.

Package and Class References

Simple references to Java packages and classes from JavaScript create the `JavaPackage` and `JavaClass` objects. In the earlier example about the Redwood corporation, for example, the reference `Packages.redwood` is a `JavaPackage` object. Similarly, a reference such as `java.lang.String` is a `JavaClass` object.

Most of the time, you don't have to worry about the `JavaPackage` and `JavaClass` objects—you just work with Java packages and classes, and `LiveConnect` creates these objects transparently.

`JavaClass` objects are not automatically converted to instances of `java.lang.Class` when you pass them as parameters to Java methods—you must create a wrapper around an instance of `java.lang.Class`. In the following example, the `forName` method creates a wrapper object `theClass`, which is then passed to the `newInstance` method to create an array.

```
theClass = java.lang.Class.forName("java.lang.String")
theArray = java.lang.reflect.Array.newInstance(theClass, 5)
```

Arguments of Type char

You cannot pass a one-character string to a Java method which requires an argument of type char. You must pass such methods an integer which corresponds to the Unicode value of the character. For example, the following code assigns the value “H” to the variable c:

```
c = new java.lang.Character(72)
```

Example of JavaScript Calling Java

The `$NSHOME\plugins\samples\js\bugbase` directory includes a simple application illustrating the use of LiveConnect. This section describes the JavaScript code in that sample application. See “Example of Calling Server-Side JavaScript” for a description of this application’s Java code.

The bugbase application represents a simple bug database. You enter a bug by filling in a client-side form with the bug number, priority, affected product, and a short description. Another form allows you to view an existing bug.

The following JavaScript processes the enter action:

```
// Step 1. Verify that ID was entered.
if (request.bugId != "") {
    // Step 2. Create Bug instance and assign to variable.
    var bug = new Packages.bugbase.Bug(parseInt(request.bugId),
    request.bugPriority, request);
    // Step 3. Get access to shared array and store instance
    there.
    project.bugsLock.lock();
    project.bugs[parseInt(request.bugId)] = bug;
    project.bugsLock.unlock();
    // Step 4. Display information.
    write("<P><b><I>====>Committed bug: </I></b>");
    write(bug, "<BR>");
}
// Step 5. If no ID was entered, alert user.
else {
    write("<P><b><I>====>Couldn't commit bug: please complete
    all fields.</I></b>");
}
```

The steps in this code are:

1. Verify that the user entered an ID for the bug. Enter the bug only in this case.
2. Create an instance of the Java class `Bug`, and assign that instance to the `bug` variable. The `Bug` class constructor takes three parameters: two of them are properties of the `request` object; the third is the JavaScript `request` object itself. Because they are form elements, these `request` properties are both JavaScript strings. The code changes the ID to an integer before passing it to the Java constructor. Having passed the `request` object to the Java constructor, that constructor can then call its methods. This process is discussed in “Example of Calling Server-Side JavaScript.”
3. Use `project.bugsLock` to get exclusive access to the shared `project.bugs` array and then store the new `Bug` instance in that array, indexed by the bug number specified in the form. Notice that this code stores a Java object reference as the value of a property of a JavaScript object. For information on locking, see “Sharing Objects Safely with Locking.”
4. Display information to the client about the bug you have just stored.
5. If no bug ID was entered, display a message indicating that the bug couldn’t be entered in the database.

¹Java to JavaScript Communication

If you want to use JavaScript objects in Java, you must import the `netscape.javascript` package into your Java file. This package defines the following classes:

- `netscape.javascript.JSObject` allows Java code to access JavaScript methods and properties.
- `netscape.javascript.JSException` allows Java code to handle JavaScript errors.

These classes are delivered in either a `.jar` or a `.zip` file. See the *Server-Side JavaScript Reference* for more information about these classes.

To access the LiveConnect classes, place the `.jar` or `.zip` file in the `CLASSPATH` of the JDK compiler in either of the following ways:

- Create a `CLASSPATH` environment variable to specify the path and name of `.jar` or `.zip` file.
- Specify the location of `.jar` or `.zip` file when you compile by using the `-classpath` command line parameter.

1. <http://developer.netscape.com/docs/manuals/communicator/plugin/index.htm>

For example, in Navigator 4.0 for Windows NT, the classes are delivered in the `java40.jar` file in the `Program\Java\Classes` directory beneath the Navigator directory. You can specify an environment variable in Windows NT by double-clicking the System icon in the Control Panel and creating a user environment variable called `CLASSPATH` with a value similar to the following:

```
D:\Navigator\Program\Java\Classes\java40.jar
```

See the Sun JDK documentation for more information about `CLASSPATH`.

NOTE

Because Java is a strongly typed language and JavaScript is weakly typed, the JavaScript runtime engine converts argument values into the appropriate data types for the other language when you use LiveConnect. See “Data Type Conversions” for complete information.

Using the LiveConnect Classes

All JavaScript objects appear within Java code as instances of `netscape.javascript.JSObject`. When you call a method in your Java code, you can pass it a JavaScript object as one of its argument. To do so, you must define the corresponding formal parameter of the method to be of type `JSObject`.

Also, any time you use JavaScript objects in your Java code, you should put the call to the JavaScript object inside a `try...catch` statement which handles exceptions of type `netscape.javascript.JSException`. This allows your Java code to handle errors in JavaScript code execution which appear in Java as exceptions of type `JSException`.

Accessing JavaScript with JSObject

For example, suppose you are working with the Java class called `JavaDog`. As shown in the following code, the `JavaDog` constructor takes the JavaScript object `jsDog`, which is defined as type `JSObject`, as an argument:

```
import netscape.javascript.*;

public class JavaDog
{
    public String dogBreed;
    public String dogColor;
    public String dogSex;

    // define the class constructor
    public JavaDog(JSObject jsDog)
    {
        // use try...catch to handle JSExceptions here
        this.dogBreed = (String)jsDog.getMember("breed");
        this.dogColor = (String)jsDog.getMember("color");
        this.dogSex = (String)jsDog.getMember("sex");
    }
}
```

Notice that the `getMember` method of `JSObject` is used to access the properties of the JavaScript object. The previous example uses `getMember` to assign the value of the JavaScript property `jsDog.breed` to the Java data member `JavaDog.dogBreed`.

NOTE

A more realistic example would place the call to `getMember` inside a `try...catch` statement to handle errors of type `JSException`. See “Handling JavaScript Exceptions in Java” for more information.

To get a better sense of how `getMember` works, look at the definition of the custom JavaScript object `Dog`:

```
function Dog(breed,color,sex) {
    this.breed = breed
    this.color = color
    this.sex = sex
}
```

You can create a JavaScript instance of `Dog` called `gabby` as follows:

```
gabby = new Dog("lab","chocolate","female")
```

If you evaluate `gabby.color`, you can see that it has the value “chocolate”. Now suppose you create an instance of `JavaDog` in your JavaScript code by passing the `gabby` object to the constructor as follows:

```
javaDog = new Packages.JavaDog(gabby)
```

If you evaluate `javaDog.dogColor`, you can see that it also has the value “chocolate”, because the `getMember` method in the Java constructor assigns `dogColor` the value of `gabby.color`.

Handling JavaScript Exceptions in Java

When JavaScript code called from Java fails at run time, it throws an exception. If you are calling the JavaScript code from Java, you can catch this exception in a `try...catch` statement. The JavaScript exception is available to your Java code as an instance of

`netscape.javascript.JSException`. `JSException` is a Java wrapper around any exception type thrown by JavaScript, similar to the way that instances of `JSObject` are wrappers for JavaScript objects.

Use `JSException` when you are evaluating JavaScript code in Java. If the JavaScript code is not evaluated, either due to a JavaScript compilation error or to some other error that occurs at run time, the JavaScript interpreter generates an error message that is converted into an instance of `JSException`.

For example, you can use a `try...catch` statement such as the following to handle `LiveConnect` exceptions:

```
try {
    global.eval("foo.bar = 999;");
} catch (Exception e) {
    if (e instanceof JSException) {
        jsCodeFailed();
    } else {
        otherCodeFailed();
    }
}
```

In this example, the `eval` statement fails if `foo` is not defined. The `catch` block executes the `jsCodeFailed` method if the `eval` statement in the `try` block throws a `JSONException`; the `otherCodeFailed` method executes if the `try` block throws any other error.

Accessing Server-Side JavaScript

Now let's look specifically at using Java to access server-side JavaScript. For a Java method to access server-side JavaScript objects, it must have been called from a server-side JavaScript application. In client-side JavaScript, Java can initiate an interaction with JavaScript. On the server, Java cannot initiate this interaction.

NOTE

When you recompile a Java class that is used in a JavaScript application, the new definition may not take effect immediately. If any JavaScript application running on the web server has a live reference to an object created from the old class definition, all applications continue to use the old definition. For this reason, when you recompile a Java class, you should restart any JavaScript applications that access that class.

Threading

Java allows you to create separate threads of execution. You need to be careful using this feature when your Java code interacts with JavaScript code.

Every server-side JavaScript request is processed in a thread known as the **request thread**. This request thread is associated with state information such as the JavaScript context being used to process the request, the HTTP request information, and the HTTP response buffer.

When you call Java code from a JavaScript application, that Java code runs in the same request thread as the original JavaScript application. The Java code in that thread can interact with the JavaScript application and be guaranteed that the environment is as it expects. In particular, it can rely on the associated state information.

However, you can create a new thread from your Java code. If you do, that new thread *cannot* interact with the JavaScript application and *cannot* rely on the state information associated with the original request thread. If it attempts to do so, the behavior is undefined. For example, a

Java thread you create cannot initiate any execution of JavaScript code using `JSObject`, nor can it use `writeHttpOutput`, because this method requires access to the HTTP response buffer.

Example of Calling Server-Side JavaScript

The `$NSHOME\plugins\samples\js\bugbase` directory includes a simple application that illustrates the use of `LiveConnect`. This section describes the sample application's Java code. See "Example of JavaScript Calling Java" for a description of the basic workings of this application and of its JavaScript code.

```
// Step 1. Import the needed Java objects.
package Bugbase;
import netscape.javascript.*;
import netscape.server.serverenv.*;
// Step 2. Create the Bug class.
public class Bug {
    int id;
    String priority;
    String product;
    String description;
    String submitter;
    // Step 3. Define the class constructor.
    public Bug(int id, String priority, JSObject req)
        throws java.io.IOException
    {
        // write part of http response
        NetscapeServerEnv.writeHttpOutput("Java constructor: Creating
            a new bug.<br>");
        this.id = id;
        this.priority = priority;
        this.product = (String)req.getMember("bugProduct");
        this.description = (String)req.getMember("bugDesc");
    }
    // Step 4. Return a string representation of the object.
    public String toString()
    {
        StringBuffer result = new StringBuffer();
        result.append("\r\nId = " + this.id
            + "; \r\nPriority = " + this.priority
            + "; \r\nProduct = " + this.product
            + "; \r\nDescription = " + this.description);
        return result.toString();
    }
}
```

Many of the steps in this code are not specific to communicating with JavaScript. It is only in steps 1 and 3 that JavaScript is relevant.

1. Specify the package being used in this file and import the `netscape.javascript` and `netscape.server.serverenv` packages. If you omit this step, you cannot use JavaScript objects.
2. Create the Java `Bug` class, specifying its fields.
3. Define the constructor for this class. This constructor takes three parameters: an integer, a string, and an object of type `JSObject`. This final parameter is the representation of a JavaScript object in Java. Through the methods of this object, the constructor can access properties and call methods of the JavaScript object. In this case, it uses the `getMember` method of `JSObject` to get property values from the JavaScript object. Also, this method uses the `writeHttpOutput` method of the predefined `NetscapeServerEnv` object (from the `netscape.server.serverenv` package) to print information during object construction. This method writes a byte array to the same output stream used by the JavaScript `write` function.
4. Define the `toString` method. This is a standard method for a Java object that returns a string representation of the fields of the object.

Data Type Conversions

Because Java is a strongly typed language and JavaScript is weakly typed, the JavaScript runtime engine converts argument values into the appropriate data types for the other language when you use LiveConnect. These conversions are described in the following sections:

- JavaScript to Java Conversions
- Java to JavaScript Conversions

JavaScript to Java Conversions

When you call a Java method and pass it parameters from JavaScript, the data types of the parameters you pass in are converted according to the rules described in the following sections:

- Number Values
- Boolean Values
- String Values

- Null Values
- `JSONArray` and `JavaObject` Objects
- `JavaClass` Objects
- Other JavaScript Objects

The return values of methods of `netscape.javascript.JSObject` are always converted to instances of `java.lang.Object`. The rules for converting these return values are also described in these sections.

For example, if `JSObject.eval` returns a JavaScript number, you can find the rules for converting this number to an instance of `java.lang.Object` in “Number Values.”

Number Values

When you pass JavaScript number types as parameters to Java methods, Java converts the values according to the rules described in the following table:

Table 14-2

Java parameter type	Conversion rules
<code>double</code>	The exact value is transferred to Java without rounding and without a loss of magnitude or sign.
<code>java.lang.Double</code> <code>java.lang.Object</code>	A new instance of <code>java.lang.Double</code> is created, and the exact value is transferred to Java without rounding and without a loss of magnitude or sign.
<code>float</code>	<ul style="list-style-type: none"> • Values are rounded to float precision. • Values which are unrepresentably large or small are rounded to +infinity or -infinity.
<code>byte</code> <code>char</code> <code>int</code> <code>long</code> <code>short</code>	<ul style="list-style-type: none"> • Values are rounded using round-to-negative-infinity mode. • Values which are unrepresentably large or small result in a run-time error. • NaN values are converted to zero.
<code>java.lang.String</code>	Values are converted to strings. For example, <ul style="list-style-type: none"> • 237 becomes “237”
<code>boolean</code>	<ul style="list-style-type: none"> • 0 and NaN values are converted to false. • Other values are converted to true.

When a JavaScript number is passed as a parameter to a Java method which expects an instance of `java.lang.String`, the number is converted to a string. Use the `==` operator to compare the result of this conversion with other string values.

Boolean Values

When you pass JavaScript Boolean types as parameters to Java methods, Java converts the values according to the rules described in the following table:

Table 14-3

Java parameter type	Conversion rules
<code>boolean</code>	All values are converted directly to the Java equivalents.
<code>java.lang.Boolean</code> <code>java.lang.Object</code>	A new instance of <code>java.lang.Boolean</code> is created. Each parameter creates a new instance, not one instance with the same primitive value.
<code>java.lang.String</code>	Values are converted to strings. For example: <ul style="list-style-type: none"> • <code>true</code> becomes “true” • <code>false</code> becomes “false”
<code>byte</code> <code>char</code> <code>double</code> <code>float</code> <code>int</code> <code>long</code> <code>short</code>	<ul style="list-style-type: none"> • <code>true</code> becomes 1 • <code>false</code> becomes 0

When a JavaScript Boolean is passed as a parameter to a Java method which expects an instance of `java.lang.String`, the Boolean is converted to a string. Use the `==` operator to compare the result of this conversion with other string values.

String Values

When you pass JavaScript string types as parameters to Java methods, Java converts the values according to the rules described in the following table:

Table 14-4

Java parameter type	Conversion rules
<code>java.lang.String</code> <code>java.lang.Object</code>	A JavaScript string is converted to an instance of <code>java.lang.String</code> with an ASCII value.
<code>byte</code> <code>double</code> <code>float</code> <code>int</code> <code>long</code> <code>short</code>	All values are converted to numbers as described in ECMA-262 ¹ .
<code>char</code>	All values are converted to numbers.
<code>boolean</code>	<ul style="list-style-type: none"> • The empty string becomes false. • All other values become true.

1. <http://developer.netscape.com/docs/javascript/e262-pdf.pdf>

Null Values

When you pass null JavaScript values as parameters to Java methods, Java converts the values according to the rules described in the following table:

Table 14-5

Java parameter type	Conversion rules
Any class Any interface type	The value becomes null.

Table 14-5

Java parameter type	Conversion rules
byte char double float int long short	The value becomes 0.
boolean	The value becomes false.

JSONArray and JSONObject Objects

In most situations, when you pass a JavaScript `JSONArray` or `JSONObject` as a parameter to a Java method, Java simply unwraps the object; in a few situations, the object is coerced into another data type according to the rules described in the following table:

Table 14-6

Java parameter type	Conversion rules
Any interface or class that is assignment-compatible with the unwrapped object.	The object is unwrapped.
<code>java.lang.String</code>	The object is unwrapped, the <code>toString</code> method of the unwrapped Java object is called, and the result is returned as a new instance of <code>java.lang.String</code> .
byte char double float int long short	The object is unwrapped, and either of the following situations occur: <ul style="list-style-type: none"> • If the unwrapped Java object has a <code>doubleValue</code> method, the <code>JSONArray</code> or <code>JSONObject</code> is converted to the value returned by this method. • If the unwrapped Java object does not have a <code>doubleValue</code> method, an error occurs.

Table 14-6

Java parameter type	Conversion rules
<code>boolean</code>	<p>The object is unwrapped and either of the following situations occur:</p> <ul style="list-style-type: none"> • If the unwrapped object has a <code>booleanValue</code> method, the source object is converted to the return value. • If the object does not have a <code>booleanValue</code> method, the conversion fails.

An interface or class is assignment-compatible with an unwrapped object if the unwrapped object is an instance of the Java parameter type. That is, the following statement must return true:

```
unwrappedObject instanceof parameterType
```

JavaClass Objects

When you pass a JavaScript `JavaClass` object as a parameter to a Java method, Java converts the object according to the rules described in the following table:

Table 14-7

Java parameter type	Conversion rules
<code>java.lang.Class</code>	The object is unwrapped.
<code>java.lang.JSObject</code> <code>java.lang.Object</code>	The <code>JavaClass</code> object is wrapped in a new instance of <code>java.lang.JSObject</code> .
<code>java.lang.String</code>	The object is unwrapped, the <code>toString</code> method of the unwrapped Java object is called, and the result is returned as a new instance of <code>java.lang.String</code> .
<code>boolean</code>	<p>The object is unwrapped and either of the following situations occur:</p> <ul style="list-style-type: none"> • If the unwrapped object has a <code>booleanValue</code> method, the source object is converted to the return value. • If the object does not have a <code>booleanValue</code> method, the conversion fails.

Other JavaScript Objects

When you pass any other JavaScript object as a parameter to a Java method, Java converts the object according to the rules described in the following table:

Table 14-8

Java parameter type	Conversion rules
<code>java.lang.JSObject</code> <code>java.lang.Object</code>	The object is wrapped in a new instance of <code>java.lang.JSObject</code> .
<code>java.lang.String</code>	The object is unwrapped, the <code>toString</code> method of the unwrapped Java object is called, and the result is returned as a new instance of <code>java.lang.String</code> .
<code>byte</code> <code>char</code> <code>double</code> <code>float</code> <code>int</code> <code>long</code> <code>short</code>	The object is converted to a value using the logic of the <code>ToPrimitive</code> operator described in ECMA-262 ¹ . The <i>PreferredType</i> hint used with this operator is <code>Number</code> .
<code>boolean</code>	<p>The object is unwrapped and either of the following situations occur:</p> <ul style="list-style-type: none"> • If the unwrapped object has a <code>booleanValue</code> method, the source object is converted to the return value. • If the object does not have a <code>booleanValue</code> method, the conversion fails.

1. <http://developer.netscape.com/docs/javascript/e262-pdf.pdf>

Java to JavaScript Conversions

Values passed from Java to JavaScript are converted as follows:

- Java `byte`, `char`, `short`, `int`, `long`, `float`, and `double` are converted to JavaScript numbers.
- A Java `boolean` is converted to a JavaScript `boolean`.
- An object of class `netscape.javascript.JSObject` is converted to the original JavaScript object.

- Java arrays are converted to a JavaScript pseudo-Array object; this object behaves just like a JavaScript Array object: you can access it with the syntax `arrayName[index]` (where `index` is an integer), and determine its length with `arrayName.length`.
- A Java object of any other class is converted to a JavaScript wrapper, which can be used to access methods and fields of the Java object:
 - Converting this wrapper to a string calls the `toString` method on the original object.
 - Converting to a number calls the `doubleValue` method, if possible, and fails otherwise.
 - Converting to a boolean calls the `booleanValue` method, if possible, and fails otherwise.

Note that instances of `java.lang.Double` and `java.lang.Integer` are converted to JavaScript objects, not to JavaScript numbers. Similarly, instances of `java.lang.String` are also converted to JavaScript objects, not to JavaScript strings.

Java `String` objects also correspond to JavaScript wrappers. If you call a JavaScript method that requires a JavaScript string and pass it this wrapper, you'll get an error. Instead, convert the wrapper to a JavaScript string by appending the empty string to it, as shown here:

```
var JavaString = JavaObj.methodThatReturnsAString();  
var JavaScriptString = JavaString + "";
```


Glossary

This glossary defines terms useful in understanding JavaScript applications.

active application A JavaScript application that has been started, and can therefore be run, or accessed, by clients.

application URL A page in a JavaScript application, relative to the base application URL. Clients use the application URL to access a particular page in the application.

ASCII American Standard Code for Information Interchange. Defines the codes used to store characters in computers.

base application URL The name of a JavaScript application, as specified in Application Manager. Clients use the application URL to access the default page of an application.

BLOB Binary large object. The format of binary data stored in a relational database.

bytecodes Platform-independent object code, intermediate between source code and platform-specific machine code.

CGI Common Gateway Interface. A specification for communication between an HTTP server and gateway programs on the server. CGI is a popular interface used to create server-based web applications with languages such as Perl or C.

client A web browser, such as Netscape Navigator.

client cookie One of the methods that JavaScript uses to maintain properties of the `client` object. This method stores name/values pairs as cookies on the client machine.

client-side JavaScript Core JavaScript plus extensions that control a browser (Navigator or another web browser) and its DOM. For example, client-side extensions allow an application to place elements on an HTML form and respond to user events such as mouse clicks, form input, and page navigation. *See also* core JavaScript, server-side JavaScript.

client URL encoding One of the methods that JavaScript uses to maintain properties of the `client` object. This method appends name/value pairs to a URL string.

commit To perform all the database actions in a transaction; the attempt to commit may succeed or fail, depending on the actions and the state of the database.

cookie A mechanism by which the Navigator client can store small items of information on the client machine.

CORBA Common Object Request Broker Architecture. A standard endorsed by the OMG (Object Management Group), the Object Request Broker (ORB) software that handles the communication between objects in a distributed computing environment.

core JavaScript The elements common to both client-side and server-side JavaScript. Core JavaScript contains a core set of objects, such as `Array`, `Date`, and `Math`, and a core set of language elements such as operators, control structures, and statements. *See also* client-side JavaScript, server-side JavaScript.

critical section A section of code in which you need exclusive access to an object or property to ensure data consistency.

current row A row in a table referred to by a database cursor.

current transaction In a database application, the active transaction under which all database actions are performed.

cursor A data structure returned by a database query, consisting of a virtual table and a pointer to a row in the virtual table; the JavaScript `Cursor` object has corresponding properties and methods.

DDL Data Definition Language. Database statements to create, alter, or delete database objects such as tables, keys, stored procedures, and so on.

deadlock The situation in which two processes each wait for the other to finish a task before continuing. If each waits for the other, neither can continue.

default page The page, specified in the Application Manager, that a client accesses if the user requests an application URL, but no specific page in the application. Compare to initial page.

deploy To transfer an application to a location where others can access it. The location can be on the local server's file system or a remote server connected to the Internet.

deployment server A server on which a JavaScript application is installed that is accessible to end users; also called a production server. Should be different from the development server.

deprecate To discourage use of a feature without removing the feature from the product. When a JavaScript feature is deprecated, an alternative is typically recommended; you should no longer use the deprecated feature because it might be removed in a future release.

development server A server, typically inside a firewall, on which you develop and test JavaScript applications, not accessible to end users. Should be different from the deployment server.

DML Data Manipulation Language. Database statements to select, update, insert, or delete rows in tables.

ECMA European Computer Manufacturers Association. The international standards association for information and communication systems.

ECMAScript A standardized, international programming language based on core JavaScript. This standardization version of JavaScript behaves the same way in all applications that support the standard. Companies can use the open standard language to develop their implementation of JavaScript. *See also* core JavaScript.

external function A function defined in a native library that can be used in a JavaScript application.

HTML Hypertext Markup Language. A markup language used to define pages for the World Wide Web.

HTTP Hypertext Transfer Protocol. The communication protocol used to transfer information between web servers and clients.

initial page The page, specified in the Application Manager, that the Application Manager runs when the application is first started. Compare to default page.

IP address A set of four numbers between 0 and 255, separated by periods, that specifies a location for the TCP/IP protocol.

IP address technique One of JavaScript's techniques for maintaining the `client` object, in which the server uses the client's IP address to refer to a data structure containing `client` property values.

LiveConnect Lets Java and JavaScript code communicate with each other. From JavaScript, you can instantiate Java objects and access their public methods and fields. From Java, you can access JavaScript objects, properties, and methods.

MIME Multipart Internet Mail Extension. A standard specifying the format of data transferred over the internet.

Netscape cookie protocol Netscape's format for specifying the parameters of a cookie in the HTTP header.

ODBC Open Database Connectivity. Microsoft's interface for relational database programming.

primitive value Data that is directly represented at the lowest level of the language. A JavaScript primitive value is a member of one of the following types: `undefined`, `null`, `Boolean`, `number`, or `string`. The following examples show some primitive values.

```
a=true           // Boolean primitive value
b=42             // number primitive value
c="Hello world" // string primitive value
if (x==undefined) {} // undefined primitive value
if (x==null) {}   // null primitive value
```

roll back To cancel all the database actions within one transaction.

server cookie One of JavaScript's techniques for maintaining the `client` object, in which the server generates a unique name for a client, stored in the cookie file on the client, and later uses the stored name to refer to a data structure containing `client` property values.

server-side JavaScript Core JavaScript plus extensions relevant only to running JavaScript on a server. For example, server-side extensions allow an application to communicate with a relational database, provide continuity of information from one invocation to another of the application, or perform file manipulations on a server. *See also* client-side JavaScript, core JavaScript.

server URL encoding One of JavaScript's techniques for maintaining the `client` object, in which the server generates a unique name for a client, appends it to URLs, and later uses the stored name to refer to a data structure containing `client` property values.

Session Management Service JavaScript's four predefined objects `request`, `client`, `project`, and `server`, and one class, `Lock`, that provide a foundation for sharing data among requests, clients, and applications.

SQL Structured Query Language. A standard language for defining, controlling, and querying relational databases.

static method or property A method or property of a built-in object that cannot be a property of instances of the object. For example, you can instantiate new instances of the `Date` object. Some methods of `Date`, such as `getHours` and `setDate`, are also methods of instances of the `Date` object. Other methods of `Date`, such as `parse` and `UTC`, are static, so instances of `Date` do not have these methods.

stopped application An application that has been stopped with the Application Manager and is not accessible to clients.

transaction A group of database actions that are performed together; all the actions succeed, or all fail.

updatable cursor A database cursor in which you can update tables based on the contents of the virtual table.

URL Universal Resource Locator. The addressing scheme used by the World Wide Web.

web file The compiled form of a JavaScript application; contains bytecodes. Must be installed in a Netscape web server to run.

WWW World Wide Web

SYMBOLS

\$NSHOME\js\samples
and CLASSPATH 315

&, in URLs 118

.htm file extension 49

.html file extension 49

.js file extension 49

?, in URLs 118

\ 189

' (backquote)

See backquotes

A

-a compiler directive 52

ACTION attribute 115

in sample application 76

active application

glossary entry 333

addClient function 96, 119, 158, 161

addResponseHeader function 96, 120, 125, 196

agent property 134

anchors, creating 101

Application Manager

capabilities of 46

and client object 147

configuring default settings 64

debugging applications 61

figure of 47

identifying library files 189

installing applications 54–56

overview 46–49

protecting 40

running applications 61

starting, stopping, and restarting 59

application name 57

changing 59

specifying 55

application status, defined 48

application URLs 56, 90

glossary entry 333

application/x-www-form-urlencoded content type
192, 194

applications

architecture of 34–37

bugbase sample application 72

building 44–45

cipher sample application 72

compiling 17, 50–53

configuration 39–41

creating 44

creating source files 49–50

dbadmin sample application 72

debugging 61–??

deleting 59

deploying 37, 63–64

and file upload 115

hangman sample application 72

and HTML 36

installing 54–56

jsaccall sample application 72

metadata sample application 73

- partitioning tasks 89
- publishing 54
- restricting access to 58, 64
- running 36, 61
 - at runtime 37
 - sample 71–85
 - sendmail sample application 72
 - sharing data 144, 145
 - starting, stopping, and restarting 59
 - statement types 36
 - system requirements for 37
 - videoapp sample application 72
 - viewer sample application 72
 - world sample application 71
- arenas, in garbage collection 126
- Array object 97
- arrays
 - See also the individual arrays*
 - Java 315
- ASCII 185
 - glossary entry 333
- AUTH_TYPE CGI variable 110, 111, 134
- auth_type property 110, 134
- auth_user property 111, 134
- authorization 103

B

- background needed 14
- backquotes 99, 100–103
 - enclosing JavaScript in 100
 - when to use 102
- backward compatibility 17
- base application URL
 - glossary entry 333
- Bcc property 176
- beginTransaction method 213, 242, 290
- binary data type 287
- binary format 185
- binary large objects
 - See* BLObs
- bit data type 287

- blob data type 271, 285
- blob function 244
- Blob object 93, 285, 286, 287
- blobImage method 244
- blobLink method 244
- BLObs
 - glossary entry 333
 - overview 243
 - working with 243–247
- Body property 176
- Boolean expressions 138
- Boolean object 97
- Boolean type conversions (LiveConnect) 326
- booleanValue method 331
- bugbase application 72
- byte data type 285
- bytecodes 37
 - building 45
 - glossary entry 333
- byteToString method 183, 185

C

- c compiler directive 52
- C functions
 - calling 96
 - registering 96
- C libraries 187
 - calling 89
- C++ libraries 187
- callC function 96, 188, 190
- Cc property 176
- CGI variables
 - accessing 110–113
 - AUTH_TYPE 110, 111, 134
 - CONTENT_LENGTH 113
 - CONTENT_TYPE 113
 - GATEWAY_INTERFACE 113
 - HTTP_ACCEPT 113
 - HTTP_IF_MODIFIED_SINCE 113
 - HTTPS 111
 - HTTPS_KEYSIZE 111

- HTTPS_SECRETKEYSIZE 111
- PATH_TRANSLATED 112
- QUERY_STRING 111, 112, 134
- REMOTE_ADDR 112
- REMOTE_HOST 112
- REMOTE_USER 111, 112, 134
- REQUEST_METHOD 111, 112, 134
- SCRIPT_NAME 112
- SERVER_NAME 112
- SERVER_PORT 112
- SERVER_PROTOCOL 111, 112, 134
- SERVER_SOFTWARE 114
- SERVER_URL 112
- CGI, glossary entry 333
- char arguments 316
- char data type 284, 285, 286, 287
- cipher application 72
- classes
 - Java 315
 - LiveConnect 317, 319
- CLASSPATH 315
- clearError method 183, 186
- client
 - characteristics of 88
 - communicating with server 114
 - glossary entry 333
 - maintaining client object on 151–155
 - preprocessing data on 88, 116, 121
- client cookies 152–153
 - glossary entry 333
 - lifetime of properties 158
 - maintaining client object with 108, 122, 151
- client object 93, 98, 103, 107, 120, 136–144, 151
 - adding properties to URLs 160–163
 - creating custom 139
 - custom 140–144
 - description of 136
 - destroying 159–160
 - getting identifier 96
 - id for maintaining 139
 - in sample application 76
 - lifetime 136
 - lifetime of 131, 158–160
 - maintaining 65, 96, 104, 105, 108, 114, 119, 122, 147–163
 - comparing techniques 148–151
 - on the client 151–155
 - on the server 155–158
 - with client cookies 152–153
 - with client-URL encoding 154–155
 - with IP address 156–157
 - with server cookie 157
 - with server-URL encoding 157–158
 - overview 130–131
 - in page processing 103, 104
 - properties 137–139
 - properties of 137
 - properties, expiring 158–159
 - properties, overhead from 138
 - properties, restrictions on 137
 - restrictions 140
 - storing properties on project or server 139–140
 - uniquely referring to 139–140
- client object maintenance, specifying 55
- client properties
 - assigning 152
 - Boolean 138
 - changing 105
- client requests
 - See requests
- client scripts
 - communicating with server 89
 - generating 121
 - sending values to 119
 - when to use 89
- client URL encoding 105, 110, 114, 119, 151, 154–155
 - glossary entry 334
 - lifetime of properties 159
- client-mode field, of jsa.conf 67
- client-server communication 114–126
 - using cookies for 122–124
- client-side JavaScript 19, 22, 90
 - glossary entry 334
 - illustrated 22
 - object lifetime 89
 - overview 21
- clob data type 271, 284
- close method 182, 228, 249, 257, 260, 263, 290, 294
- colName property 228, 257
- column names, displaying 236
- columnName method 228, 236, 257, 293

- columns method 228, 236, 257
- commit, glossary entry 334
- commitTransaction method 213, 242, 290
- communication between client and server 114–126
- compiler 45
 - options 52
 - and PATH environment variable 41
 - using 50–53
- configuration styles 59, 64
- confirmation prompts, configuring 65
- connect method 290
- connected method 213, 292
- connection method 291
 - of DbPool objects 212
- Connection objects 93, 97, 201, 204, 212, 290, 291, 293, 294
 - creating 212
 - error methods of 294
 - methods 213
 - storedProc method 251
- connection pools
 - See also* DbPool objects
 - as property of project object 210
 - managing 207
 - sharing array of 209
 - sharing fixed set 208
 - storing with project object 207, 208
- connections
 - approaches to 201–213
 - DbPool objects 202
 - disconnecting 204
 - establishing 201–213
 - retrieving 204, 218
 - spanning multiple client requests 214
 - specifying number of 55, 65
 - specifying the number of 203
 - storing 139
 - waiting for 217
- content types, managing custom 192–196
- CONTENT_LENGTH CGI variable 113
- CONTENT_TYPE CGI variable 113
- content-length property 195
- cookie protocol 151, 152, 157
 - See also* client cookies
- cookie.txt 122

- cookies 114, 120
 - client, glossary entry 333
 - defined 122
 - glossary entry 334
- CORBA
 - glossary entry 334
- core JavaScript 21, 93
 - glossary entry 334
- critical section 163
 - glossary entry 334
- current row 228
 - glossary entry 334
- current transaction, glossary entry 334
- cursor method 213, 291
- Cursor objects 93, 97, 290, 292, 293, 294
 - methods 228
 - overview 228
 - properties 228
- cursors
 - creating 229
 - customizing display functions 226
 - determining number of columns 236
 - displaying aggregate functions 234
 - displaying column names 236
 - displaying expressions 234
 - displaying record values 231
 - glossary entry 334
 - navigating with 235
 - overview 228
 - updatable 229, 237–240, 246
 - using 228–240

D

- d compiler directive 52
- data
 - converting between formats 185
 - sharing between client and server 114
- data persistence 89
- data sharing 89, 98, 103, 131, 145, 147, 163–173, 182, 203
- data types
 - Boolean conversions 326

- converting for LiveWire 283–287
 - converting with LiveConnect 324–331
 - Informix 286
 - Java to JavaScript conversion 330
 - JSONArray conversions 328
 - JavaClass conversions 329
 - JavaObject conversions 328
 - in JavaScript 26
 - JavaScript to Java conversion 324
 - null conversions 327
 - number conversions 325
 - ODBC 286
 - Oracle 285
 - other conversions 330
 - string conversions 327
 - Sybase 284, 287
- database access 89
- database client libraries, configuring 265–281
- database clients, supported 268–270
- database configuration, verifying 266–268
- database connection pools
 - See* connection pools
- database connections
 - See* connections
- database name 203
- database pools
 - See* DbPool objects
- database queries
 - and flush function 108
- database server name 202
- database servers
 - in JavaScript application architecture 35
- database transactions
 - See* transactions
- database type 202
- databases 197–308
 - See also* LiveWire Database Service
 - configuring 265–281
 - connecting to 203
 - converting data types 283–287
 - and dates 284
 - error handling 289–295
 - guidelines for managing connections and threads 205
 - multithreaded 204
 - single-threaded 204
 - typical interactions 200
 - verifying connection 203
- date data type 285, 286
- Date object 97, 285, 286, 287
 - converting dates to 283, 284
- dates
 - converting to Date objects 283
 - and databases 284
 - inserting in database 284
- datetime data type 285, 287
- DB2
 - configuring 271–??
 - data types 284
 - registering stored procedures in 250
 - stored procedure prototypes 250
- DB2COMM environment variable 271
- DB2INSTANCE environment variable 271
- DB2PATH environment variable 271
- dbadmin application 72, 266
- DbBuiltin object 93
- DbPool constructor 291
- DbPool objects 97
 - See also* connection pools, database pools
 - adding properties to 93
 - Boolean value returned by 292
 - connecting to a database with 201
 - connection method 212
 - connections with 202
 - creating 202
 - in connection pool arrays 210
 - no value returned by 294
 - numeric value returned by 290
 - object returned by 291
 - stored procedures and 250
 - string value returned by 293
 - using 199–264
- DDL, glossary entry 334
- deadlock 169–173
 - glossary entry 334
- debug function 96
- debug functions 62
- debug URLs, using 63
- Debugger 28
- decimal data type 285, 287

- default form values 119
- default page
 - glossary entry 335
 - specifying 55, 64
- default settings, Application Manager 64
- DELETE SQL statement 241
- deleteResponseHeader function 96, 120, 196
- deleteRow method 229, 239, 290
- deploy, glossary entry 335
- deployment server
 - defined 37
 - glossary entry 335
 - updating files to 60
- deprecate, glossary entry 335
- destroy method 153, 155, 159
- development environment, components of 37
- development platform, defined 37
- development server
 - defined 37
 - glossary entry 335
 - updating files from 60
- DHCP 156
- directories
 - conventions used 18
- disconnect method 290
- DML, glossary entry 335
- DNS 112
- document conventions 18
- document root 57
- documentation, other 15–16
- double data type 285
- double precision data type 285, 287
- Dynamic Host Configuration Protocol 156
- dynamic link libraries 187

E

- ECMA specification 28
 - JavaScript documentation and 29
 - JavaScript versions and 29
 - terminology 29

- ECMA, glossary entry 335
- ECMA-262 93
- ECMAScript, glossary entry 335
- email
 - See* mail
- environment variables, accessing 111
- eof method 183, 184
- error handling for LiveWire 289–295
- error messages, retrieving 204
- error method 183, 186
- error status, for File object 185
- errorCode method 176
- errorMessage method 176
- escape function 95, 119
- event handlers 94
 - See also the individual event handlers*
 - direct substitution 120
 - onClick 116
- exceptions
 - handling in Java 320
- execute method 213, 227, 290
- exists method 183, 185
- expiration method 153, 159
- external functions
 - calling 187
 - defined 187
 - example of use 191
 - glossary entry 335
 - guidelines for writing 188
 - registering 189
 - using in JavaScript 190
 - when to use 187
- external libraries 187–192
 - calling 89
 - identifying files 189
 - security 187
 - specifying 55, 65

F

- f compiler directive 52
- features, new 11–??

- file access modes 181
- File class 108, 180–186
- file formats 185
- file I/O 186
- File object 93, 98
 - creating 180, 186
 - described 180
 - methods of 183
 - security considerations 180
- file upload 193
- files
 - accessing with JavaScript 180–186
 - closing 181
 - getting information for 185
 - locking 182
 - opening 181
 - positioning within 183
 - reading from 184
 - writing to 184
- fixed decimal notation 283
- float data type 285, 286, 287
- parseFloat method 331
- flush function 95, 104, 107, 152, 196
 - described 108
- flush method 108, 185
 - example of use 108
- form elements
 - hidden 116, 119, 120
 - using as request properties 115
- FORM HTML tag 115
- forms
 - and client maintenance 151
 - client scripts for 89
 - default values 119
 - GET method 194
 - hidden elements 119
 - POST method 194
 - processing 75
 - and the request object 130
 - statements 76
 - variables 135
- From property 176
- Function object 97
- functions 95
 - debug 62

- redirect 109
- write 99, 100

G

- garbage collection, in JavaScript 126–127
- GATEWAY_INTERFACE CGI variable 113
- get value of method attribute 115
- getLength method 183, 185
- getMember method 320
- getOptionValue function 96, 116
- getOptionValueCount function 96
- getPosition method 183, 184
- getPostData method 195
- global object 29

H

- h compiler directive 52
- hangman application 72
- headers 120, 124
 - request 113
- Hello World application 71
- hidden form elements 119
- history method 133
- home field, of jsa.conf 66
- host property 146
- hostname 112
- hostname property 146
- HREF attribute 101
- HTML 88, 90
 - attributes 94, 100
 - conditionalizing 89
 - embedding JavaScript in 98–103
 - generating 95
 - glossary entry 335
 - and JavaScript 87, 98–103
 - sample source code 75
- HTML page
 - constructing 90, 103, 104, 107–110

- sending to client 107, 151
- HTML tags
 - FORM 115
 - IMG 244
 - INPUT 120
- HTTP 98, 103
 - applets 312
 - glossary entry 335
 - protocol level 111, 112
 - request information 322
 - request, *See* requests
 - response buffer 322
 - user 111, 112
- HTTP method 111, 112
- HTTP_ACCEPT CGI variable 113
- HTTP_IF_MODIFIED_SINCE CGI variable 113
- HTTPD processes, objects for 145
- HTTPHeader method 113, 114, 124, 193
- HTTPS CGI variable 111
- HTTPS_KEYSIZE CGI variable 111
- HTTPS_SECRETKEYSIZE CGI variable 111

I

- i compiler directive 52
- if...else statement
 - in sample application 77
- image data type 287
- image maps 135–136
 - using 135
- imageX property 134, 135
- imageY property 134, 135
- IMG HTML tag 244
- index.html
 - and default page 55
- Informix 200
 - configuring 272–274
 - data types 285, 286
 - stored procedure parameters 251
- INFORMIXDIR environment variable 272
- INFORMIXSERVER environment variable 272
- INFORMIXSQLHOSTS environment variable 272

- initial page 136, 207
 - and request object 133
 - glossary entry 335
 - specifying 55, 64
- INPUT HTML tag 120
- input validation 89
- INSERT SQL statement 241
- insertRow method 229, 239, 290
- installation parameters
 - configuring 64
- Installing an application 54
- int data type 287
- integer data type 284, 285
- interval data type 285
- IP address 151, 155, 156–157
 - glossary entry 336
 - lifetime of properties 159
- IP address technique, glossary entry 336
- ip property 134
- ISMAP attribute, of IMG tag 135
- isNaN function 95

J

- Java
 - See also* LiveConnect
 - accessing JavaScript 317
 - accessing with LiveConnect 313
 - arrays in JavaScript 315
 - calling from JavaScript 313
 - classes 315
 - communication with JavaScript 311–331
 - compared to JavaScript 26
 - example of calling from JavaScript 316
 - to JavaScript communication 317
 - JavaScript exceptions and 320
 - methods requiring char arguments 316
 - object wrappers 312
 - objects, naming in JavaScript 314
 - packages 315
- Java applets, server scripts for 89
- java package 314
- Java virtual machine 36

- JSONArray object 313, 315
- JSONArray type conversions 328
- JavaClass object 313, 315
- JavaClass type conversions (LiveConnect) 329
- JavaObject object 313
- JavaObject type conversions 328
- JavaPackage object 313, 315
- JavaScript
 - accessing from Java 317
 - application executable files 37
 - basics 87–127
 - client-side 21
 - communication with Java 311–331
 - compared to Java 26
 - components illustrated 20
 - core 21
 - debugging 96
 - differences between server and client 19
 - ECMA specification and 28
 - enabling 39
 - example of calling from Java 323
 - files 36, 94
 - compiling 37
 - garbage collection 126–127
 - and HTML 98–103
 - to Java Communication 313
 - Navigator 21–23
 - object wrappers 331
 - overview 19
 - runtime processing 89–92, 103–107
 - server-side 23–26
 - server-side overview 93–98
 - tasks on client 88–89
 - tasks on server 88–89
 - variables, and request properties 135
 - versions and Navigator 15
 - where it can occur 94
- JavaScript files 94
- js files 36
- jsa.conf file 66
- jsac. *See* compiler.
- jsacall application 72, 187
- jsacall.c 188
- jsacall.h 188
- JSEException class 317, 320

- JSObject class 317
- JSObject, accessing JavaScript with 319
- jsVersion property 146

L

- l compiler directive 52
- LD_LIBRARY_PATH environment variable 271, 275, 276, 279, 280
- LIBPATH environment variable 272, 276
- libraries, external 187–192
- library field, of jsa.conf 67
- links
 - for BLOB data 244, 245
 - creating 101
- LiveConnect 95, 97, 311–331
 - accessing Java directly 313
 - capabilities 312
 - configuration for 41
 - converting data types 324–331
 - glossary entry 336
 - and HTTP applets 312
 - Java to JavaScript communication 317
 - and NSAPI applications 312
 - objects 313
 - restrictions 312
 - and WAI plug-ins 312
- LiveWire database access library 36
- LiveWire Database Service 197–308
 - See also* databases
 - system requirements for 38
- lock method 145, 163–173
 - in sample application 77
- Lock object 93, 98, 163–173
- locking 163–173
- long data type 286
- long raw data type 286
- longdatacompat 271

M

mail

- MIME-compliant 178
- sending with JavaScript 98, 176–180

majorErrorCode method 204, 213, 290, 294

majorErrorMessage method 204, 213, 293, 294, 295

mark and sweep 126

Math object 97

mathematical constants and functions 283

maxdbconnect field, of jsa.conf 67

metadata application 73

METHOD attribute 115

method property 111, 134

methods

- close 182
- destroy 159
- expiration 159
- flush 108
- history 133
- open 181
- setPosition 183
- static 337

migrating applications 17

MIME types 180

MIME, glossary entry 336

MIME-compliant mail 178

minorErrorCode method 204, 213, 290, 294

minorErrorMessage method 204, 213, 293, 294

money data type 285, 287

multimedia

- using BLOBs 243

MULTIPLE attribute

- of SELECT tag 116

multithreaded databases 204

multi-threading

- and Sybase 281

N

NAME attribute 101, 115

- in sample application 76

- of SELECT tag 117

native functions 187–192

Navigator

- in JavaScript application architecture 34
- and JavaScript 22, 23
- JavaScript versions supported 15

Navigator JavaScript

- See client-side JavaScript

nchar data type 285, 287

Netscape cookie protocol 152, 157

- glossary entry 336

netscape package 314

Netscape packages

- See packages

Netscape web servers

- configuration style support 59
- in JavaScript application architecture 34
- sample applications installed with 71

NETSCAPE_LIVEWIRE 122, 152

next method 229, 231, 235, 255, 257, 292

NSAPI applications 312

null value conversions (LiveConnect) 327

number data type 285, 286, 287

Number object 97

number property 77

numbers

- converting to characters 183, 185
- identifying 95
- storing 283
- type conversions (LiveConnect) 325

numeric data type 287

nvarchar data type 285, 287

O

-o compiler directive 52

object field, of jsa.conf 66

Object object 97

object prototypes 93

objects

- adding properties to 93
- JavaScript in Java 319

- lifetimes of 130
- LiveConnect 313
- ODBC
 - configuring 274–276
 - data types 286
 - drivers supported 268–270
 - glossary entry 336
 - stored procedure prototypes 250
- oldvideo application 297–308
- onClick event handler 116
- Open DataBase Connectivity standard
 - See ODBC
- open method 181
- OpenLink
 - configuring 275
- OPTION tag 117
- Oracle 200
 - configuring 277–279
 - data types 285, 286
 - stored procedure parameters 252
- ORACLE_HOME environment variable 277, 278
- ORACLE_SID environment variable 278
- outParamCount method 252, 261
- outParameters method 249, 252, 258, 261
- output buffer 104
 - flushing 95, 108–109
- output parameters
 - of stored procedures 261

P

- p compiler directive 52
- Packages object 97, 314
- packages, Java 315
- packed decimal notation 283
- parameters for stored procedures 251
- parseFloat function 95
- parseInt function 95
- Pascal functions 187
- passthrough SQL, executing 227
- PATH environment variable 271
 - for the compiler 41

- PATH_INFO CGI variable 111
- PATH_TRANSLATED CGI variable 112
- pointers 183
- pools of database connections
 - See connection pools
- popups, client scripts for 89
- port property 146
- post value of method attribute 115
- primitive value, glossary entry 336
- project object 93, 98, 103, 144–145
 - description of 144
 - in sample application 77
 - lifetime 144
 - lifetime of 131, 144
 - locking 145, 163, 168, 182
 - overview 131
 - properties 144–145
 - properties of 144
 - sharing 145
 - storing connection pools on 207, 208, 210
- properties
 - See also *the individual properties*
 - static 337
- protocol property 111, 134, 146
- prototypes 93
 - stored procedures and 250

Q

- queries
 - customizing output 226
 - displaying 226
- query property 111, 134
- QUERY_STRING CGI variable 111, 112, 134
- quotation marks
 - with backslash 103
 - order of 101

R

- r compiler directive 52

- raw data type 286
- read method 183, 184
- readByte method 183, 184
- readLn method 183, 184
- real data type 287
- record values, displaying 231
- redirect function 95, 105, 107, 109–110, 133, 151, 152, 154, 158, 161, 196
 - described 109
- registerCFFunction function 96, 188, 189
- release method 212, 213, 290, 294
- REMOTE_ADDR CGI variable 112
- REMOTE_HOST CGI variable 112
- REMOTE_USER CGI variable 111, 112, 134
- request bodies, manipulating 194–196
- request headers 113, 114, 124
 - manipulating 193–194
- request object 93, 98, 103, 107, 114, 133–136, 193, 195
 - creation 133
 - description of 133
 - example of property creation 115
 - and forms 135
 - in sample application 76
 - lifetime of 130, 133
 - overview 130
 - in page processing 103, 104
 - properties 110, 134–135
 - properties, and JavaScript variables 135
 - saving properties 110
 - setting properties with form elements 115
- request properties encoding in URLs 118
- request thread 322
- REQUEST_METHOD CGI variable 111, 112, 134
- requests
 - changing 95, 109–110
 - header 120
 - manipulating raw data 192–196
 - redirecting 119
 - sharing a connection 214
 - terminating 109
- response headers, manipulating 96, 196
- responses, manipulating raw data 192–196
- result sets 253
 - See also* Resultset object
 - creating 254
 - Resultset object 253
- resultSet method 248, 252, 254, 291
- Resultset object 93, 97, 248, 290, 292, 293, 294
 - See also* result sets
 - methods of 257
- return values of stored procedures 260
- returnValue method 249, 252, 258, 260
- rollback, glossary entry 336
- rollbackTransaction method 213, 242, 290
- rowid data type 286
- runtime environment components 36
- runtime library 36
- runtime processing 99, 103–107
 - example 91

S

- sample applications 71–85
 - Hangman 79–85
 - Hello World 73–79
- SCRIPT tag 36, 94
 - See also* client scripts
 - direct substitution in 120
 - when to use
- SCRIPT_NAME CGI variable 112
- scripts, changing client properties 105
- security
 - external libraries and 187
 - File object and 180
- select lists 116
- SELECT SQL statement 229, 231, 234, 238
- SELECT tag 96, 116
- send method 176
- sendmail application 72
- SendMail class 176–180
- SendMail object 93, 98
- serial data type 285
- server
 - administration functions 103
 - authorization 103
 - characteristics of 88

- communicating with client 119
- maintaining client object on 155–158
- processes, objects for 145
- restarting 188, 189
- server cookies 151, 155, 157
 - glossary entry 336
 - lifetime of properties 159
- server object 93, 98, 103, 145–147
 - description of 145
 - lifetime 147
 - lifetime of 132
 - locking 163, 168, 182
 - overview 131–132
 - properties 146–147
 - properties of 146
 - sharing data 147
- server routing 57
- server scripts
 - communicating with client 89
 - when to use 89
- SERVER tag 36, 89, 90, 94, 98, 99–100, 102–103
 - See also* server scripts
 - in sample application 76
 - when to use 102
- server URL encoding 110, 114, 119, 155, 157–158
 - glossary entry 337
 - lifetime of properties 159
- SERVER_NAME CGI variable 112
- SERVER_PORT CGI variable 112
- SERVER_PROTOCOL CGI variable 111, 112, 134
- SERVER_SOFTWARE CGI variable 114
- SERVER_URL CGI variable 112
- server-client communication 114–126
- server-side JavaScript 19, 23–26
 - enabling 39
 - executing 107
 - glossary entry 336
 - illustrated 23, 25
- server-side objects, lifetime of 89
- session key 111
- Session Management Service 89, 103, 129–173
 - glossary entry 337
 - object overview 129–133
- setPosition method 183
- SHLIB_PATH environment variable 272, 276
- single-threaded databases 204
- smalldatetime data type 287
- smallfloat data type 285
- smallint data type 284, 285, 287
- smallmoney data type 287
- Smtplib property 176
- source files 64
 - creating 49–50
- source files, components of 49
- source script, example of 75
- special characters in URLs 119
- SQL 200
 - See also the individual statements*
 - error handling 289–295
 - executing 227
 - glossary entry 337
- SQL_BIGINT data type 286
- SQL_BINARY data type 286
- SQL_CHAR data type 286
- SQL_DATE data type 286
- SQL_DECIMAL data type 286
- SQL_DOUBLE data type 286
- SQL_FLOAT data type 286
- SQL_INTEGER data type 286
- SQL_LONGBINARY data type 286
- SQL_LONGVARCHAR data type 286
- SQL_NUMERIC data type 286
- SQL_REAL data type 286
- SQL_SMALLINT data type 286
- SQL_TIME data type 286
- SQL_TIMESTAMP data type 286
- SQL_VARBINARY data type 286
- SQL_VARCHAR data type 286
- SQLTable method 213, 226, 290
- ssjs_generateClientID function 96, 139, 217
- ssjs_getCGIVariable function 96, 110, 111, 134
- ssjs_getClientID function 96, 139, 157, 158
- start field, of jsa.conf 66
- static, glossary entry 337
- stopped transaction, glossary entry 337
- stored procedures 247–264
 - See also* Stproc object

- arguments to 249
- defining prototypes for 250
- executing 251
- in DB2 250
- output parameters 261
- parameters for 251
- registering 250
- result sets 248
- return values 249, 260
- steps for using 249
- Stproc object 248, 249
- storedProc method 213, 251, 291
- storedProcArgs method 250, 290
- Stproc object 93, 97, 248, 249, 290, 291
 - See also* stored procedures
 - creating 251
 - methods of 252
- string data type 284, 285, 286, 287
- String object 97
- strings
 - parsing 95
 - type conversions (LiveConnect) 327
- stringToByte method 183, 185
- styles, configuration 59, 64
- Subject property 176
- sun package 314
- Sybase 200
 - configuring 279–281
 - data types 284, 287
 - stored procedure prototypes 250
- SYBASE environment variable 279, 280

T

- targets, creating 101
- TCP port 112
- text data type 285, 287
- text/html content type 193
- thread pools 40
- threads
 - and databases 204
 - and Java 322

- ticks
 - See* backquotes
- time data type 285
- timestamp data type 285
- tinyint data type 287
- TNS_ADMIN environment variable 277
- To property 176
- toString method 331
- trace utility 61, 63
 - configuring 65
- transactions
 - committing 203
 - controlling 242
 - glossary entry 337
 - managing 241–243
 - overview 241
 - rolling back 203

U

- unescape function 95
- unique identifier 96
- unlock method 145, 163–173
 - in sample application 77
- updatable cursor
 - glossary entry 337
- UPDATE SQL statement 241
- updateRow method 229, 239, 290
- upgrading applications 17
- uri field, of jsa.conf 66
- uri property 134
- URL encoding
 - See also* client URL encoding, server URL encoding
 - maintaining client object with 151, 154, 155
- URL-encoded variables
 - and request object 135
 - resetting 119
- URLs 112
 - adding client properties to 160–163
 - adding information to 96
 - application 56

- changing 109–110
- and client maintenance 154–155, 157–158
- conventions used 18
- creating 151
- debug 63
- dynamically generating 118
- encoding information in 118–126
- escaping characters in 95
- glossary entry 337
- including special characters 119
- modifying 114
- and redirect function 109
- redirecting to 95
- and reloading a page 119
- and Session Management objects 132
- to start and stop applications 59

- glossary entry 337
- moving 60
- specifying path 55, 64
- wrappers
 - for Java objects 312
 - for JavaScript objects 331
- write function 76, 95, 99, 107, 161, 181
 - with backquotes 100
 - and client maintenance 155
 - described 107
 - and flush 108
 - with SERVER tag 99
- write method 183, 184
- writeByte method 183, 185
- writeln method 183, 185
- WWW, glossary entry 337

V

- v compiler directive 52
- VALUE attribute 120
- varbinary data type 287
- varchar data type 284, 285, 287
- varchar2 data type 286
- VDBCINI environment variable 275
- versions of JavaScript 15
- video application
 - See videoapp application
- videoapp application 72, 297–308
 - and ODBC 297
 - and SQL Server 297
- viewer application 72
- Visigenic, configuring 276
- Visual JavaScript 28

W

- WAI plug-ins 312
- web files 37, 60
 - building 45
 - defined 50

