

Oracle® Product Data Quality

PIM Connector API Interface Guide

Release 5.6.1

E18267-01

April 2011


This document describes the Oracle Product Data Quality Product Information Management (PIM) Connector application programming interface (API) and contains the following:

- "Overview" on page 1
- "API Database Packages" on page 2
- "API Database Tables" on page 4
- "API Database Views" on page 4

Overview

Oracle DataLens Server is built on industry-leading DataLens™ Technology to standardize, match, enrich, and correct product data from different sources and systems. The core DataLens Technology uses patented semantic technology designed from the ground up to tackle the extreme variability typical of product data.

Oracle Product Data Quality uses three core DataLens Technology modules: Governance Studio, Knowledge Studio, and Application Studio. The following figure illustrates the process flow of these modules.

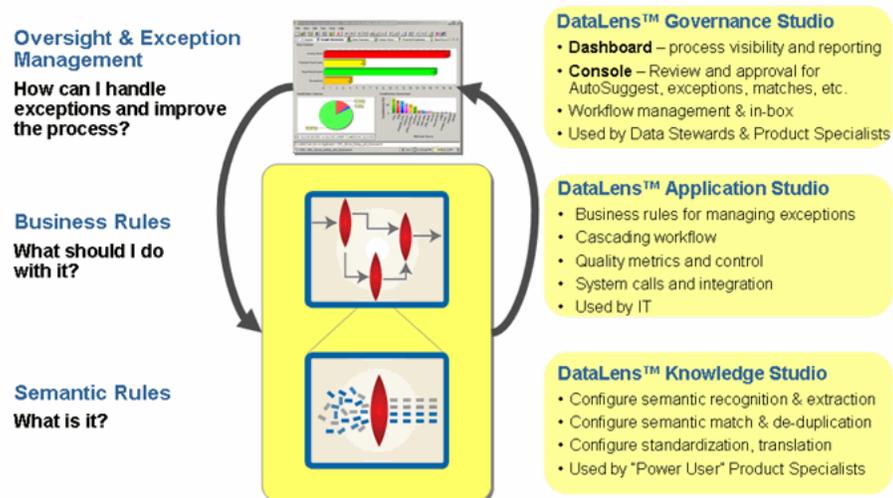

The PIM Connector API provides data objects to facilitate the interaction of OPDQ Data Service Applications (DSAs) with PIM data structures. The PIM Connector API

data objects are comprised of database packages, views, and tables, which are described in the following sections.

API Database Packages

The PIM Connector API database packages are described in the following sections.

DLS_CONNECTOR_PUB

Public interface functions and procedures that can be linked to from external processes as follows:

Name	Parameters	Description
ProduceAutoBuild	P_JobID NUMBER P_ItemClass VARCHAR2	<p>Procedure that takes a DSA JOBID and the name of the top-level Item Catalog Category (ICC) as parameters, extracts the passed ICC and all descendants.</p> <p>All attributes and distinct attribute values that have been associated with the SemanticModel Display Format are also extracted.</p> <p>All extracted data is inserted into the DLS_ATTRIBUTE_INFO table keyed by JOBID.</p>
ProduceSampleData	P_JobID NUMBER P_ItemClass VARCHAR2	<p>Procedure that takes a DSA JOBID and the name of the top-level ICC as parameters, extracts the passed ICC, all descendants, and a random sampling of production item descriptions.</p> <p>The number of rows extracted per ICC is controlled by the Profile Option, DLS_AUTOBUILD_SAMPLE_SIZE.</p> <p>The extracted data is then inserted into the table, DLS_ITEM_SAMPLE_DATA.</p>
ProductionPull	P_JobID NUMBER P_ItemClass VARCHAR2	<p>Procedure that takes a DSA JOBID and the name of the top-level ICC as parameters, extracts the passed ICC and all descendants, and all production item data.</p> <p>The columns extracted include: Inventory_Item_ID, Organization_Name, Description, and all attributes associated with the ICCs Display Format concatenated into a comma-delimited string.</p> <p>The extracted data is inserted into a temporary database table.</p>

Name	Parameters	Description
PrepBatch	P_JobID NUMBER P_BatchID NUMBER	Procedure that takes a DSA JOBID and a PIM WorkBench batch id then calls another public procedure or function to prepare the batch for viewing and manipulation in the WorkBench.
UpdateItem	P_JOBID NUMBER P_DlsXML CLOB	Procedure that takes a DSA JOBID key and the XML output from the Oracle AU XML Parameterizer DSA widget as input. Each item passed is then updated back into the interface tables.
InsertItem	P_JOBID NUMBER P_DlsXML CLOB	Procedure that takes a DSA JOBID key and the XML output from the Oracle AU XML Parameterizer DSA widget as input. Each item passed is then inserted into the interface tables.
CreateProductionBatch	P_JOBID NUMBER P_ItemClass VARCHAR2	Procedure that takes a DSA JOBID and the name of the top-level ICC as parameters, extracts the passed in ICC, and all attributes associated with the ICCs SemanticModel Display Format . PIM Workbench batches are created and the extracted data is inserted into the interface tables. The number of records per batch is controlled by the Profile Option, DLS_EGO_IMPORT_BATCH_SIZE .
ImportBatch	P_JobID NUMBER P_BatchID NUMBER	Procedure that takes a DSA JOBID and a PIM Workbench batch ID as input, and submits a concurrent request to import the batch into production.
ConcatProdAttributes	P_ItemClass NUMBER P_InventoryID NUMBER P_OrgID VARCHAR2	Function that retrieves and returns a comma-delimited list of the passed in item's production attribute values. Only the semantic attributes are extracted by this function.
ConcatIntrfAttributes	P_ItemClass NUMBER P_BatchID NUMBER P_OrganizationID VARCHAR2 P_ItemNumber VARCHAR2	Function that retrieves and returns a comma-delimited list of the passed in item's attribute values that are stored in the interface tables. Only the semantic attributes are extracted by this function.

Name	Parameters	Description
FinalizeLoad	P_JobID NUMBER	Procedure that finalizes an external data load by creating <i>n</i> of batches, and then moving the newly loaded items into the created batch. The Profile Option, DLS_EGO_IMPORT_BATCH_SIZE , is used to control the number of records inserted into a batch

DLS_CONNECTOR_PVT

Private implementation functions and procedures that should not be linked to from external processes because they support the DLS_CONNECTOR_PUB functions and procedures.

API Database Tables

The following tables are created for use by the PIM Connector API database objects:

Table Name	Description
dls_alt_item_categories	Global temporary table used to build Alternate Catalog records to be inserted or updated into the MTL_ITEM_CATEGORIES_INTERFACE interface table.
dls_attribute_info	Used to return data from the ProduceAutobuild procedure.
dls_attr_discovery	A template table and can be removed.
dls_attr_info	A template table and can be removed.
dls_extract_attributes	A template table and can be removed.
dls_item_sample_data	Used to return sample data from the ProduceSampleData procedure.
dls_job_batches	Stores created batch ID's by JOBID.
dls_job_messages	Stores all unexpected messages generated by the connector keyed by JOBID.
dls_production_pull	Stores items extracted using the ProductionPull procedure.
dls_semantic_cache	iA template table and can be removed.
dls_supported_primary_attrs	A template table and can be removed.
dls_usr_attr_values	Global temporary table used to build user defined attribute records to be inserted or updated into the EGO_ITM_USR_ATTR_INTRFC interface table.

API Database Views

The following views are created by the PIM Connector API database objects:

View Name	Description
DLS_INTERFACE_PULL_V	Returns all columns in the MTL_SYSTEM_ITEMS_INTERFACE interface table and an additional column that contains the semantic attribute names and values concatenated together from the EGO_ITM_USR_ATTR_INTRFC interface table.
DLS_PRODUCTION_PULL_V	Returns all columns in the MTL_SYSTEM_ITEMS_B interface table and an additional column containing the semantic attribute names and values concatenated together from the production EGO interface tables.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/us/corporate/accessibility/index.html>.

Access to Oracle Support

Oracle customers have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/support/contact.html> or visit <http://www.oracle.com/accessibility/support.html> if you are hearing impaired.

PIM Connector API Interface Guide, Release 5.6.1
E18267-01

Copyright © 2011 Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation shall be subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License (December 2007). Oracle America, Inc., 500 Oracle Parkway, Redwood City, CA 94065.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark licensed through X/Open Company, Ltd.

This software or hardware and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

