

## **Oracle® Application Integration Architecture**

Agile Product Lifecycle Management Integration Pack for Oracle  
E-Business Suite: Design to Release Implementation Guide

Release 11.1

**E22280-04**

May 2012

E22280-04

Copyright © 2001, 2012, Oracle and/or its affiliates. All rights reserved.

Primary Author: Oracle Corporation

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

**U.S. GOVERNMENT END USERS:** Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

---

---

# Contents

<b>Preface .....</b>	xiii
What's New in this Guide .....	xiii
Common Oracle AIA Pre-Built Integration Guides .....	xiii
Documentation Accessibility .....	xiv
Additional Resources.....	xiv

## Part I Understanding the Delivered Process Integrations

### 1 Agile Product Lifecycle Management Integration for Oracle E-Business Suite

1.1 Overview .....	1-1
1.1.1 Functionalities .....	1-1
1.2 Solution Design Assumptions and Constraints .....	1-2
1.3 Architecture of Agile PLM Integration.....	1-3
1.4 Agile PLM to Oracle E-Business Suite Process Flows .....	1-4
1.4.1 Process Integration for New Part Request .....	1-4
1.4.2 Process Integration for Item Synchronization .....	1-4
1.4.3 Process Integration for Change Order Validation .....	1-4
1.4.4 Process Integration for Change Order Release.....	1-4
1.5 Oracle E-Business Suite to Agile PLM Process Flows .....	1-5
1.5.1 Process Integration for Item Attribute Update.....	1-6
1.5.2 Process Integration for Item Balance Update .....	1-6
1.5.3 Process Integration for Change Order Update.....	1-6
1.6 Components of Agile PLM Integration Pack for Oracle E-Business Suite Integration....	1-7
1.6.1 ACS .....	1-7
1.6.2 SDK .....	1-7
1.6.3 Oracle Application Integration Architecture Foundation Pack.....	1-8
1.6.4 Oracle E-Business Suite.....	1-8
1.6.4.1 Oracle Integration Repository .....	1-8
1.6.4.2 Business Event System.....	1-8
1.6.4.3 Concurrent Programs/Manager .....	1-9
1.6.4.4 Oracle Generic Configurator User Interface.....	1-9

### 2 Process Integration for Item Attribute Update

2.1 Overview .....	2-1
2.2 Item Attribute Update Process Integration.....	2-1

2.2.1	Exceptions .....	2-3
2.2.2	Item Attribute Update Integration Services Orchestration .....	2-3
2.3	Solution Assumptions and Constraints .....	2-5
2.4	Agile PLM Interfaces .....	2-5
2.5	Oracle E-Business Suite Interfaces .....	2-6
2.6	Core AIA Components .....	2-6
2.6.1	Oracle E-Business Suite and Agile PLM Components .....	2-7
2.7	Integration Services .....	2-8
2.7.1	ItemEBSV2 .....	2-8
2.7.2	UpdateItemListEbizReqABCSImpl .....	2-9
2.7.3	UpdateItemListAgileProvABCSImpl .....	2-9

### **3 Process Integration for Item Balance Update**

3.1	Overview .....	3-1
3.2	Item Balance Update Process Integration .....	3-1
3.2.1	Exceptions .....	3-3
3.2.2	Item Balance Update Integration Services Orchestration .....	3-3
3.3	Solution Assumptions and Constraints .....	3-5
3.4	Agile PLM Interfaces .....	3-5
3.5	Oracle E-Business Suite Interfaces .....	3-6
3.6	Core AIA Components .....	3-6
3.6.1	Oracle E-Business Suite and Agile PLM Components for Item Balance Update .....	3-7
3.7	Integration Service .....	3-8
3.7.1	ItemBalanceEBS .....	3-8
3.7.2	UpdateItemListEbizReqABCSImpl .....	3-9
3.7.3	UpdateItemListAgileProvABCSImpl .....	3-9

### **4 Process Integration for New Part Request**

4.1	Overview .....	4-1
4.2	NPR Process Integration .....	4-2
4.2.1	Exceptions .....	4-4
4.2.2	NPR Integration Services Orchestration .....	4-4
4.3	Solution Assumptions and Constraints .....	4-5
4.4	Agile PLM Interfaces .....	4-6
4.5	Oracle E-Business Suite Interfaces .....	4-6
4.6	Core AIA Components .....	4-7
4.6.1	Agile PLM and Oracle E-Business Suite Components .....	4-8
4.7	Integration Services .....	4-8
4.7.1	ItemEBSV2 .....	4-8
4.7.2	SyncItemListAgileReqABCSImpl .....	4-9
4.7.3	SyncItemListEbizProvABCSImpl .....	4-9

### **5 Process Integration for Item Synchronization**

5.1	Overview .....	5-1
5.2	Item Synchronization Process Integration .....	5-2
5.2.1	Exceptions .....	5-2

5.2.2	Item Synchronization Integration Services Orchestration.....	5-2
5.3	Solution Assumptions and Constraints.....	5-3
5.4	Agile PLM Interfaces .....	5-3
5.5	Oracle E-Business Suite Interfaces.....	5-4
5.6	Core AIA Components.....	5-4
5.6.1	Agile PLM and Oracle E-Business Suite Components for Item Synchronization.....	5-5
5.7	Integration Services .....	5-6
5.7.1	ItemEBSV2 .....	5-6
5.7.2	SyncItemListAgileReqABCSImpl.....	5-6
5.7.3	SyncItemListEbizProvABCSImpl.....	5-7

## 6 Process Integration for Change Order Validation

6.1	Overview .....	6-1
6.2	Change Order Validation Process Integration.....	6-1
6.2.1	Exceptions .....	6-6
6.2.2	Change Order Validation Integration Services Orchestration.....	6-6
6.3	Solution Assumptions and Constraints.....	6-9
6.4	Agile PLM Interfaces .....	6-9
6.5	Oracle E-Business Suite Interfaces.....	6-10
6.6	Core AIA Components.....	6-10
6.6.1	Agile PLM and Oracle E-Business Suite Components for Change Order Validation .....	6-11
6.7	Integration Services .....	6-12
6.7.1	EngineeringChangeOrderEBS .....	6-12
6.7.2	ValidateEngineeringChangeOrderListAgileReqABCSImpl.....	6-13
6.7.3	ValidateEngineeringChangeOrderListEbizProvABCSImpl.....	6-13

## 7 Process Integration for Change Order Release

7.1	Overview .....	7-1
7.2	Change Order Release Process Integration.....	7-2
7.2.1	Releasing a Change Order in Agile PLM .....	7-3
7.2.2	Generating an aXML by ACS.....	7-3
7.2.3	Parsing and Transformation of aXML Data.....	7-3
7.2.4	Posting Change Order Data to Oracle E-Business Suite .....	7-7
7.2.5	Communicating Change Order Implementation Status to Agile PLM .....	7-9
7.2.6	Exceptions .....	7-11
7.2.7	Change Order Release Integration Services Orchestration .....	7-11
7.3	Solution Assumptions and Constraints.....	7-13
7.3.1	Using Inactive or Obsolete Lifecycle Status.....	7-14
7.4	Agile PLM Interfaces .....	7-14
7.5	Oracle E-Business Suite Interfaces.....	7-15
7.6	Core AIA Components.....	7-15
7.6.1	Agile PLM and Oracle E-Business Suite Components for Change Order Release .....	7-16
7.7	Integration Services .....	7-17
7.7.1	EngineeringChangeOrderEBS .....	7-17
7.7.2	ProcessEngineeringChangeOrderAgileReqABCSImpl.....	7-18

7.7.3	CreateEngineeringChangeOrderListEbizProvABCSImpl.....	7-18
-------	---	------

## 8 Process Integration for Change Order Update

8.1	Overview .....	8-1
8.2	Change Order Update Process Integration .....	8-2
8.2.1	Change Order Update Process Inputs .....	8-2
8.2.2	Change Order Update Processing.....	8-3
8.2.3	Change Order Update Sample Use Case.....	8-5
8.2.4	Exceptions .....	8-6
8.2.5	Change Order Update Integration Services Orchestration .....	8-7
8.3	Solution Assumptions and Constraints.....	8-9
8.4	Agile PLM Interfaces .....	8-9
8.5	Oracle E-Business Suite Interfaces.....	8-10
8.6	Core AIA Components.....	8-10
8.6.1	Oracle E-Business Suite and Agile PLM Components for Change Order Update ..	8-11
8.7	Integration Services .....	8-12
8.7.1	EngineeringChangeOrderEBS .....	8-12
8.7.2	UpdateEngineeringChangeOrderListEbizReqABCSImpl.....	8-13
8.7.3	UpdateEngineeringChangeOrderListAgileProvABCSImpl.....	8-13

## 9 Process Integration for Variant Management

9.1	Overview .....	9-1
9.2	Variant Management Process Integration.....	9-3
9.2.1	Exceptions .....	9-5
9.2.2	Variant Management Integration Services Orchestration .....	9-5
9.3	Solution Assumptions and Constraints.....	9-7
9.4	Agile PLM Interfaces .....	9-7
9.5	Oracle E-Business Suite Interfaces.....	9-8
9.6	Core AIA Components.....	9-8
9.6.1	Oracle E-Business Suite and Agile PLM Components for Change Order Update ....	9-9
9.7	Integration Services .....	9-10
9.7.1	ConfiguratorURLEBS .....	9-10
9.7.2	BillOfMaterialsConfigurationEBS .....	9-10
9.7.3	GetConfiguratorURLAgileReqABCSImpl .....	9-11
9.7.4	GetConfiguratorURLEbizProvABCSImpl .....	9-11
9.7.5	SyncBillOfMaterialsConfigurationListEbizReqABCSImpl.....	9-11
9.7.6	SyncBillOfMaterialsConfigurationListAgileProvABCSImpl .....	9-11

## Part II Implementing the Delivered Process Integrations

### 10 Configuring Process Integration for Agile PLM Oracle E-Business Suite

10.1	Setting Up the Participating Applications.....	10-1
10.1.1	Setting Up Agile PLM .....	10-1
10.1.1.1	Create New Destinations.....	10-2
10.1.1.2	Create New Events for ECO, MCO, and SCO .....	10-3
10.1.1.3	Define Filters .....	10-3

10.1.1.4	Create New Subscribers for ECO, MCO, and SCO .....	10-4
10.1.1.5	Set Privileges .....	10-5
10.1.1.6	Create New Read Privileges for MCO.....	10-5
10.1.1.7	Set Up Agile Item Quantity Attributes.....	10-5
10.1.1.8	Create Auto Number Process Extensions for NPR.....	10-6
10.1.1.9	Create Action Menu Based Process Extensions for NPR.....	10-7
10.1.1.10	Create Action Menu Based Process Extensions for Sync Item.....	10-7
10.1.1.11	Set up Change_Status Table for Workflow.....	10-8
10.1.1.12	Set Up Agile Notifications.....	10-8
10.1.1.13	Variant Management: Enable Notification .....	10-9
10.1.1.14	Modify the Read Item Privilege: .....	10-9
10.1.1.15	Create New Privilege for Modify:.....	10-9
10.1.1.16	Update Read Users Privilege .....	10-10
10.1.1.17	Update or Modify Users Privilege .....	10-10
10.1.1.18	Create New Role for VM .....	10-10
10.1.1.19	Modify the Newly Created VM Role.....	10-10
10.1.2	Setting Up Oracle E-Business Suite.....	10-11
10.1.2.1	Profile Settings .....	10-12
10.1.2.2	Oracle Configurator Setup .....	10-13
10.1.2.3	Secured Access to APPS Schema.....	10-14
10.1.2.4	Performance Considerations.....	10-14
10.1.3	Concurrent Programs Setup and Scheduling .....	10-14
10.1.4	Setting Up Product Information Management Spoke Source System .....	10-18
10.1.5	SQL Script for Loading Cross-Reference Records .....	10-18
10.2	Identifying Cross-Reference Data.....	10-21
10.2.1	Creating Cross-Reference Data from Other Integrations.....	10-23
10.3	Populating Cross-References .....	10-24
10.4	Describing DVMs.....	10-27
10.5	Setting Configuration Properties .....	10-39
10.5.1	Configuration Parameters .....	10-39
10.5.2	Agile PLM Configurations .....	10-40
10.5.2.1	Provider ABCS.....	10-41
10.5.2.2	Requester ABCS.....	10-46
10.5.3	Oracle E-Business Suite Configurations .....	10-50
10.5.3.1	Provider ABCS.....	10-50
10.5.3.2	Requester ABCS.....	10-58
10.5.3.3	BPEL Service.....	10-63
10.6	Setting Up NLS.....	10-63
10.6.1	Requester Flows .....	10-63
10.6.2	Provider Flows .....	10-64
10.6.3	Setting Up NLS in Agile PLM.....	10-65
10.6.4	Setting Up NLS in FMW for Agile PLM.....	10-65
10.6.5	Setting Up NLS in FMW for Oracle E-Business Suite .....	10-66
10.6.6	Setting Up DVMs for NLS .....	10-67
10.7	Handling Errors .....	10-67
10.7.1	Error Handling in Pre-Built Integration Queue Manager .....	10-67
10.8	Viewing EBO EIMs .....	10-68

10.9	Setting Up for Change Order Creation in Released Status in EBS .....	10-68
------	--	-------

## A Functionalities Available

## B Queue Management

B.1	Managing the Process Queues .....	B-2
B.1.1	Queuing.....	B-2
B.1.2	Change Order Process Flow .....	B-3
B.1.3	The Process Queue Manager.....	B-4
B.2	User Interface.....	B-4
B.2.1	Accessing the Process Queue Monitor .....	B-4
B.2.2	Fields and Attributes .....	B-5
B.2.2.1	Change Order Queue Monitor .....	B-5
B.2.2.2	Queue Operators .....	B-6
B.2.3	Filters .....	B-8
B.2.3.1	Filter 1: All Change Orders .....	B-8
B.2.3.2	Filter 2: Errorred Change Orders Only .....	B-9
B.2.3.3	Filter 3: Pending Changes Only.....	B-10
B.2.3.4	Filter 4: Completed Change Orders Only .....	B-10
B.2.3.5	Filter 5: Changes Errorred Within Last Week.....	B-11
B.2.3.6	Filter 6: Unprocessed Change Orders.....	B-13
B.2.3.7	Filter 7: All Delete Flags.....	B-14
B.2.3.8	Advance Query Abilities .....	B-16
B.3	Functions .....	B-16
B.4	Queue Management Solution.....	B-17
B.4.1	Queue Schema.....	B-17
B.4.2	Queue Controller .....	B-18
B.4.3	Queue Monitor .....	B-19
B.5	Queue Manager Services .....	B-19
B.5.1	CreateQueueService .....	B-19
B.5.2	CreateQueueControlService.....	B-20
B.5.3	QueueProcessorService.....	B-20
B.5.4	QueueProcessorServiceImpl .....	B-20
B.5.5	Transformations.....	B-21
B.5.6	Implementation Details.....	B-21
B.5.7	Error Management.....	B-22

## C Troubleshooting

C.1	Queue Issues .....	C-2
C.1.1	Oracle E-Business Suite Issues .....	C-3

## D Security Policies Validation

## List of Figures

1-1	Agile PLM business process flow .....	1-3
1-2	Process Integration Flow for Change Order .....	1-5
1-3	Item balance and item attributes flow .....	1-6
2-1	Sequence diagram for item attribute update .....	2-3
2-2	Item attribute update integration services orchestration .....	2-4
3-1	Integration sequence for item balance update .....	3-3
3-2	Item balance update integration services orchestration .....	3-4
4-1	NPR sequence diagram .....	4-3
6-1	Change order validation integration diagram (1 of 4) .....	6-3
6-2	Change order validation integration diagram (2 of 4) .....	6-4
6-3	Change order validation integration diagram (3 of 4) .....	6-5
6-4	Change order validation integration diagram (4 of 4) .....	6-5
6-5	Change order validation integration services orchestration .....	6-7
7-1	Change order release process flow diagram .....	7-2
7-2	Change order release integration diagram (1 of 3) .....	7-9
7-3	Change order release integration diagram (2 of 3) .....	7-10
7-4	Change order release integration diagram (3 of 3) .....	7-10
7-5	Change order release integration flow (1 of 2) .....	7-11
7-6	Change order release integration flow (2 of 2) .....	7-12
8-1	Change order update process integration sequence .....	8-6
8-2	Oracle E-Business Suite integration services orchestration .....	8-7
8-3	Agile PLM side integration services orchestration .....	8-8
9-1	Integration process flow .....	9-2
9-2	Architecture of Agile PLM Variant Management .....	9-5
9-3	Option picker forward flow sequence diagram .....	9-5
9-4	Option picker reverse flow sequence diagram .....	9-6
B-1	Process Queue Monitor .....	B-5
B-2	Process Denoters .....	B-6
B-3	Change Priorities .....	B-8
B-4	Filter All Change Orders .....	B-8
B-5	All Change Orders .....	B-9
B-6	Change Orders with Errors .....	B-9
B-7	Pending Change Orders .....	B-10
B-8	Completed Change Orders .....	B-10
B-9	Changes Errored within Last Week .....	B-11
B-10	Advance Query Abilities .....	B-16
B-11	Search Parameters .....	B-16
B-12	Queue monitoring .....	B-17
B-13	Invoking RequestorABCS through QueueProcessorServiceImpl .....	B-20
C-1	Transmission Failure .....	C-3

## List of Tables

2-1	Activities in Item Attribute Update Integration Service .....	2-4
2-2	Agile PLM Web Services Definition Language (WSDL) files.....	2-5
2-3	Agile PLM XML Schema Definition (XSD) files.....	2-6
2-4	Oracle E-Business Suite WSDL files .....	2-6
2-5	Oracle E-Business Suite XSD files.....	2-6
2-6	industry components for the process integration for item attribute update.....	2-6
2-7	Core components locations.....	2-7
2-8	Oracle E-Business Suite and Agile PLM components .....	2-7
2-9	Core components locations.....	2-8
3-1	Activities in Item Balance Update integration services orchestration .....	3-4
3-2	Agile PLM Web Services Definition Language (WSDL) files.....	3-6
3-3	Agile PLM XML Schema Definition (XSD) files.....	3-6
3-4	Oracle E-Business Suite WSDL files .....	3-6
3-5	Oracle E-Business Suite XSD files.....	3-6
3-6	Industry Components for Item Balance Update .....	3-7
3-7	Core Component Locations.....	3-7
3-8	Oracle E-Business Suite and Agile PLM Components .....	3-8
3-9	Core Component Locations.....	3-8
4-1	NPR Integration Services Orchestration Activities .....	4-4
4-2	Agile PLM Services Definition Language (WSDL) files.....	4-6
4-3	Agile PLM XML Schema Definition (XSD) files.....	4-6
4-4	Oracle E-Business Suite WSDL files .....	4-6
4-5	Oracle E-Business Suite XSD files.....	4-6
4-6	Industry Components for NPR.....	4-7
4-7	Core Component Location.....	4-7
4-8	Agile PLM and Oracle E-Business Suite Components .....	4-8
4-9	Core Component Locations.....	4-8
5-1	Activities in Item Synchronization Orchestration .....	5-2
5-2	Agile PLM Web Services Definition Language (WSDL) files.....	5-3
5-3	Agile PLM XML Schema Definition (XSD) files.....	5-4
5-4	Oracle E-Business Suite WSDL files .....	5-4
5-5	Oracle E-Business Suite XSD files.....	5-4
5-6	Industry Components for Item Synchronization .....	5-4
5-7	Core Component Locations.....	5-5
5-8	Agile PLM and Oracle E-Business Suite Components .....	5-5
5-9	Core Component Locations.....	5-6
6-1	Activities Involved in Orchestration .....	6-8
6-2	Agile PLM Web Services Definition Language (WSDL) files.....	6-10
6-3	Agile PLM XML Schema Definition (XSD) files.....	6-10
6-4	Oracle E-Business Suite WSDL files .....	6-10
6-5	Oracle E-Business Suite XSD files.....	6-10
6-6	Industry components used in validate integration ECO and PREL.....	6-10
6-7	Core components locations.....	6-11
6-8	Agile PLM and Oracle E-Business Suite components .....	6-11
6-9	Core components locations.....	6-12
7-1	Oracle E-Business Suite Translated Functionalities .....	7-5
7-2	Activities involved in Change Order Release integration .....	7-12
7-3	Agile PLM Web Services Definition Language (WSDL) files.....	7-14
7-4	Agile PLM XML Schema Definition (XSD) files .....	7-15
7-5	Oracle E-Business Suite WSDL files .....	7-15
7-6	Oracle E-Business Suite XSD files.....	7-15
7-7	Core AIA Components.....	7-15
7-8	Core components locations.....	7-16

7-9	Agile PLM and Oracle E-Business Suite services in this Integration .....	7-16
7-10	Core components locations .....	7-17
8-1	Partially Configured Change Status and Workflow Table .....	8-4
8-2	Activities in Change Order Update integration Orchestration.....	8-8
8-3	Agile PLM Web Services Definition Language (WSDL) files.....	8-10
8-4	Agile PLM XML Schema Definition (XSD) files .....	8-10
8-5	Oracle E-Business Suite WSDL files .....	8-10
8-6	Oracle E-Business Suite XSD files.....	8-10
8-7	Core AIA components.....	8-10
8-8	Core components Locations .....	8-11
8-9	Oracle E-Business Suite and Agile PLM components for change order update .....	8-11
8-10	Core components locations .....	8-12
9-1	Activities in Variant Management Integration Service .....	9-6
9-2	Agile PLM Web Services Definition Language (WSDL) files.....	9-7
9-3	Agile PLM XML Schema Definition (XSD) files .....	9-8
9-4	Oracle E-Business Suite WSDL files .....	9-8
9-5	Core AIA components.....	9-9
9-6	Core components locations .....	9-9
9-7	Oracle E-Business Suite and Agile PLM components for change order update .....	9-9
9-8	Core components locations .....	9-10
10-1	Setting for Configuring JMS .....	10-2
10-2	Values for Creating New Events for ECO, MCO, and SCO .....	10-3
10-3	Values for Defining Default Item Filters .....	10-3
10-4	Values for Modifying Filters .....	10-3
10-5	Values for Creating New Subscribers .....	10-4
10-6	Values for Setting Up Subscriber Details .....	10-4
10-7	Partially Configured Change Status and Workflow Table .....	10-8
10-8	Oracle E-Business Suite Profile Settings .....	10-12
10-9	Expected Behavior of Requests .....	10-16
10-10	Entries in CHANGE_CHANGEID Virtual Table.....	10-21
10-11	Entries in ITEM_ITEMID Table .....	10-22
10-12	XRef Table Format .....	10-25
10-13	ITEM_ITEMID XRef Table Value Format .....	10-25
10-14	Sample Data for XRef ITEM_ITEMID Table .....	10-26
10-15	CHANGE_CHANGEID XRef Table Value Format .....	10-26
10-16	Sample Data for CHANGE_CHANGEID Table .....	10-27
10-17	Domain Value Maps (DVM) .....	10-28
10-18	Agile PLM Configuration Properties .....	10-40
10-19	Properties of UpdateEngineeringChangeOrderListAgileProvABCSImpl service.....	10-41
10-20	UpdateItemListAgileProvABCSImpl service.....	10-43
10-21	UpdateItemListAgileProvABCSImpl service .....	10-44
10-22	SyncBillOfMaterialsConfigurationListAgileProvABCSImpl service .....	10-45
10-23	ProcessEngineeringChangeOrderAgileReqABCSImpl service .....	10-46
10-24	SyncItemListAgileReqABCS service .....	10-47
10-25	SyncItemListAgileReqABCSImpl service.....	10-47
10-26	ValidateEngineeringChangeOrderListAgileReqABCSImpl service .....	10-48
10-27	GetConfiguratorURLAgileReqABCSImpl service .....	10-49
10-28	E-Business Suite Configuration Properties .....	10-50
10-29	CreateEngineeringChangeOrderListEbizProvABCSImpl service .....	10-50
10-30	ValidateEngineeringChangeOrderListEbizProvABCSImpl service.....	10-53
10-31	SyncItemListEbizProvABCSImpl service .....	10-55
10-32	GetConfiguratorURLEbizProvABCSImpl service .....	10-57
10-33	UpdateItemListEbizReqABCSImpl service.....	10-58
10-34	UpdateEngineeringChangeOrderEbizReqABCSImpl service .....	10-60
10-35	UpdateItemBalanceListEbizReqABCSImpl service .....	10-61

10-36	SyncBillOfMaterialsConfigurationListEbizReqABCSImpl service .....	10-63
10-37	GenerateItemNumberService service .....	10-63
10-38	ECO_STATUS_CODE DVM Old Settings.....	10-68
10-39	ECO_STATUS CODE DVM New Settings.....	10-68
A-1	Agile Functionalities for Combination Deployment .....	A-1
B-1	Flow of Change Order Process between ESB and BPEL .....	B-3
B-2	Change Order Queue .....	B-5
B-3	Queue Operettas and Operations .....	B-6
B-4	Filter Settings to View All Change Orders.....	B-9
B-5	Filter Settings to View Change Orders with Errors .....	B-9
B-6	Filter Settings to View Pending Changes Only .....	B-10
B-7	Filter Settings to View Completed Change Orders.....	B-11
B-8	Filter Settings to View Changes Errorred within Last Week .....	B-12
B-9	Filter Settings to View Unprocessed Change Orders .....	B-14
B-10	Filter Settings to View Delete Flags.....	B-15
B-11	Queue Schema Table .....	B-18
B-12	Structure of ECO_QUEUE STATUS service .....	B-18
B-13	Steps to invoke Requestor ABCS .....	B-21
D-1	Security Policies.....	D-1

---

---

# Preface

Welcome to Oracle Application Integration Architecture Agile Product Lifecycle Management Integration Pack for Oracle E-Business Suite: Design to Release 11.1 - Implementation Guide.

## What's New in this Guide

- The Oracle Application Integration Architecture Installation and Upgrade Guide for Pre-Built Integrations is restructured into a general installation chapter with an individual configuration and deployment chapter for each pre-built integration.
- The term *process integration pack* is replaced with the term *pre-built integrations*.
- The implementation guides are restructured into two parts: design and set up.
  - Part I - Design: This part provides functional overviews, activity diagrams, assumptions and constraints, and technical sequence diagrams and steps.
  - Part II - Set up: This part provides prerequisites, data requirements, and configuration steps.
- Starting with this release, these integrations are no longer available:
  - Oracle CRM On Demand Integration Pack for JD Edwards EnterpriseOne: Lead to Order
  - Oracle Workforce Administration Integration Pack for PeopleSoft Human Resources

## Common Oracle AIA Pre-Built Integration Guides

Oracle Application Integration Architecture Pre-Built Integrations 11.1 includes the following guides shared by all products delivered with this release:

- Oracle Application Integration Architecture Installation and Upgrade Guide for Pre-Built Integrations Release 11.1

This guide provides an overview of the installation process, including how to install, configure, and deploy your pre-built integrations. The steps required to upgrade your pre-built integrations to the latest release are also provided.

- Oracle Application Integration Architecture Pre-Built Integrations 11.1: Utilities Guide

This guide describes:

- How to work with and configure Session Pool Manager (SPM), which is a service in the Oracle SOA Suite web server whose primary function is to manage a pool of web server session tokens that can be reused by BPEL flows.
- How to deploy and configure the AIACompositeScheduler. This is a utility component that is used by pre-built integrations to schedule a service-oriented architecture (SOA) composite to be invoked at the specified time interval.
- Oracle Application Integration Architecture Pre-Built Integrations 11.1: Product-to-Guide Index
 

The Product-to-Guide index lists the guides that provide information for each product delivered in this release.

## Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at  
<http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

### Access to Oracle Support

Oracle customers have access to electronic support through My Oracle Support. For information, visit  
<http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit  
<http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

## Additional Resources

The following resources are also available:

- **Oracle Application Integration Architecture Foundation Pack:**  
 Oracle AIA Pre-Built integrations require Foundation Pack 11.1.1.5.0 to be installed. Refer to the Foundation Pack documentation library on OTN to download the Foundation Pack guides at  
[http://download.oracle.com/docs/cd/E21764\\_01/aia.htm](http://download.oracle.com/docs/cd/E21764_01/aia.htm).
- **Oracle Application Integration Architecture: Product-to-Guide Index:**  
 Oracle Technology Network:  
<http://www.oracle.com/technetwork/index.html>
- **Known Issues and Workarounds:**  
 My Oracle Support: <https://support.oracle.com/>
- **Release Notes:**  
 Oracle Technology Network:  
<http://www.oracle.com/technetwork/index.html>
- **Documentation updates:**  
 Oracle Technology Network:  
<http://www.oracle.com/technetwork/index.html>

# Part I

---

## Understanding the Delivered Process Integrations

Part I contains the following chapters:

- [Chapter 1, "Agile Product Lifecycle Management Integration for Oracle E-Business Suite"](#)
- [Chapter 2, "Process Integration for Item Attribute Update"](#)
- [Chapter 3, "Process Integration for Item Balance Update"](#)
- [Chapter 4, "Process Integration for New Part Request"](#)
- [Chapter 5, "Process Integration for Item Synchronization"](#)
- [Chapter 6, "Process Integration for Change Order Validation"](#)
- [Chapter 7, "Process Integration for Change Order Release"](#)
- [Chapter 8, "Process Integration for Change Order Update"](#)
- [Chapter 9, "Process Integration for Variant Management"](#)



---

# Agile Product Lifecycle Management Integration for Oracle E-Business Suite

This chapter provides an overview of the Agile Product Lifecycle Management (PLM) integration for Oracle E-Business Suite and discusses:

- Architecture of Agile PLM integration
- Solution assumptions and constraints
- Agile PLM to Oracle E-Business Suite process flows
- Oracle E-Business Suite to Agile PLM process flows
- Components of Agile PLM pre-built integration

## 1.1 Overview

The integration between Agile PLM and Oracle E-Business Suite is designed to enable the product development process and address the primary use cases around the synchronization of product content information between Agile Product Collaboration and Oracle Manufacturing. This allows for rapid implementation of Oracle's next-generation integrated enterprise PLM processes helping the customers reduce costs and any risks associated with typical third-party and custom integrations.

The business benefits of this pre-built integration are:

- Reduced time to market for new products
- Extensibility through Oracle Product Information Management (PIM) enablement
- Faster time to volume
- Improved product quality
- Minimum supply chain disruption from new product introductions
- Predictable and sustainable product and process innovation
- Lower total cost of ownership of enterprise PLM platform
- Reduced implementation risks
- Reduced waste and total material cost by leveraging PIM as the central part repository

### 1.1.1 Functionalities

The Agile PLM pre-built integration for Oracle E-Business Suite includes the following functionalities:

- Manufacturing release of new product definition and product launch
- Change management of previously launched products
- Bidirectional synchronization of engineering change status and material attribute information from Oracle Manufacturing to Agile PLM
- Monitoring and control of the change processing and validation queues

## 1.2 Solution Design Assumptions and Constraints

These are the solution assumptions for this pre-built integration:

1. Agile PLM Content Server (ACS) is used for events to trigger the payload from Agile PLM to the integration layer.
2. This design assumes that the following statements are true:
  - Pre-defined blank templates for the custom fields are made available.
  - Transformation logic for classification elements is pre-coded in the delivered Extensible Stylesheet Language Transformations (XSL); however, you may need to modify it per your Agile PLM implementation requirements.
3. It is assumed as part of the design of this integration that Agile PLM is the system of record for product design information. This means that the following information cannot be changed directly in Oracle E-Business Suite - any changes to these pieces of information must be driven through Change Orders from Agile PLM:
  - Item Bill of Materials (BOM): Component Sequence Number, Component Number, Quantity, Reference Designators
  - Item Approved Manufacturer List (AML): Manufacturer Name, Manufacturer Part Number, Preferred Status
  - Item Revision
4. The following changes may be made in the Oracle E-Business Suite without impacting the integration:
  - Changes to other BOM attributes such as operation sequence number, sub inventory, and so on
  - Changes to the ECO Line effectivity dates
  - Any other attributes not covered in this list
5. This design leverages the Application Integration Architecture (AIA) error handling framework.
6. This integration assumes a single language setting (for example, Agile PLM and Oracle E-Business Suite in Spanish language).

These are the solution constraints:


1. In some cases, configuration-driven Extensible Stylesheet Language Transformations (XSLT) may not reflect the changes immediately. Hence, a restart of the server is required because the main XSL sheet is cached after a successful compilation.
2. ACS limits the events to be triggered from workflow only for the Change Status action, which is used for this integration.

3. Error handling capabilities of this integration are constrained by the capabilities of the AIA framework.

## 1.3 Architecture of Agile PLM Integration

Figure 1-1 illustrates the Agile PLM to Oracle E-Business Suite integration architecture:

Figure 1-1 Agile PLM business process flow

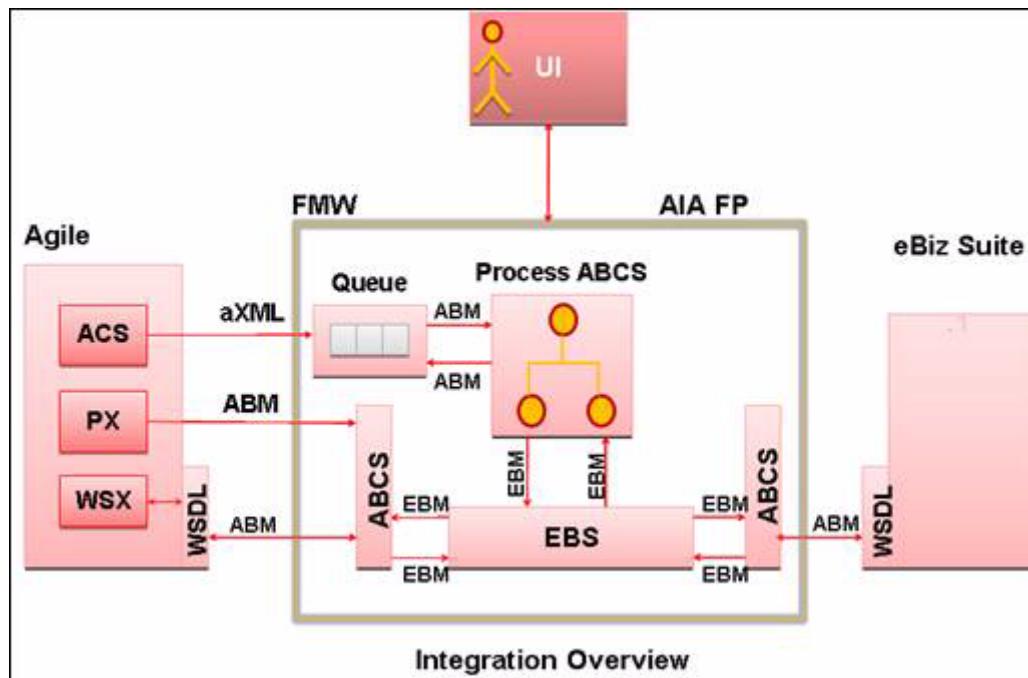

This process consists of the following flows:

1. In this architecture, for all the flows from Agile PLM into Oracle E-Business except for new parts requests and item synchronization, the messages originate in Agile PLM from the Agile Content Service (ACS) in an aXML format.  
These messages go into a queue and then call the AgileReqABCSImpl.
2. The messages are transformed and then these go to the EbizProvABCSImpl, which calls an Oracle E-Business Suite service.  
This Oracle E-Business Suite service creates the transactions in Oracle E-Business Suite.
3. ResponseEBS sends the replies to the AgileReqABCSImpl.
4. The queue is then updated and the response is sent to Agile PLM through the Agile Web Service eXtensions (WSX).
5. The new part request and item synchronization are the only process integration flows that use Process Extension (PX) to extract Agile PLM's data and send it to the Application Business Connector Service (ABCS).
6. For all the flows from Oracle E-Business to Agile PLM, the messages originate in Oracle E-Business Suite and invoked by EbizReqABCSImpl.

7. The messages are transformed and then these go to AgileProvABCSImpl through a Web service and create the transactions in Agile PLM.

## 1.4 Agile PLM to Oracle E-Business Suite Process Flows

This integration supports the following Agile PLM to Oracle E-Business Suite processed integration flows:

- Process integration for new part request
- Process integration for item synchronization
- Process integration for change order validation
- Process integration for change order release

### 1.4.1 Process Integration for New Part Request

While the Agile PLM may be a system to record product design and part information, new part numbers may originate in a system outside Agile PLM. The New Part Number (NPR) process lets users obtain part numbers from Master Data Management (MDM) systems such as Oracle Product Information Management (PIM) data Hub.

### 1.4.2 Process Integration for Item Synchronization

An engineer creating a new part in Agile PLM should be able to synchronize the part number to it with Oracle E-Business Suite/ PIM. This action is triggered on the action menu for the item. If the item does not exist on the Oracle E-Business Suite/PIM, it will be created or else updated. When a part already exists in both Agile PLM and Oracle E-Business Suite/PIM, and it is not released, then changes in its attributes in Agile PLM need to be updated in Oracle E-Business Suite/PIM.

### 1.4.3 Process Integration for Change Order Validation

During a product design phase, new products or parts are introduced and existing parts go through design changes. When the authoring of a part's attributes and design information is complete and is ready for publishing to the manufacturing system, it is released by means of change orders.

Before a change order is routed for approval in Agile PLM, you can check whether it will be implemented successfully in Oracle E-Business by validating the change order before it is released. Any potential errors will be caught early. The validation simulates the change order or Engineering Change Order (ECO) processing at any stage prior to the Release state (preferably, the Submit state).


### 1.4.4 Process Integration for Change Order Release

The change order release comprises of new Part/Product Release (PREL) and Product Design Modification (PDM) flows from Agile PLM triggered by a standard ECO or a manufacturing change order (MCO) or a service change order (SCO) release event in Agile PLM. While Agile PLM is the system of record for item description, design, specs, and other information, Oracle E-Business Suite has many more attributes and placeholders for information than the Agile PLM system. Hence, the change order release must be updated in the Oracle E-Business Suite. A corresponding ECO is created in Oracle E-Business Manufacturing, in the appropriate Oracle E-Business Inventory Organizations, in near realtime. ECO in Oracle E-Business Suite can be implemented manually or through a low-touch, standard Oracle E-Business Suite ECO Auto-Implement process.

The release of a change order in Agile PLM acts as a trigger for the synchronization of product design information with Oracle E-Business Suite. Because Agile PLM is a system of records for product design data, the synchronization process involves transfer of the released revision of the product design from Agile PLM to the manufacturing system.

Figure 1–2 illustrates the process integration for change order release:

**Figure 1–2 Process Integration Flow for Change Order**

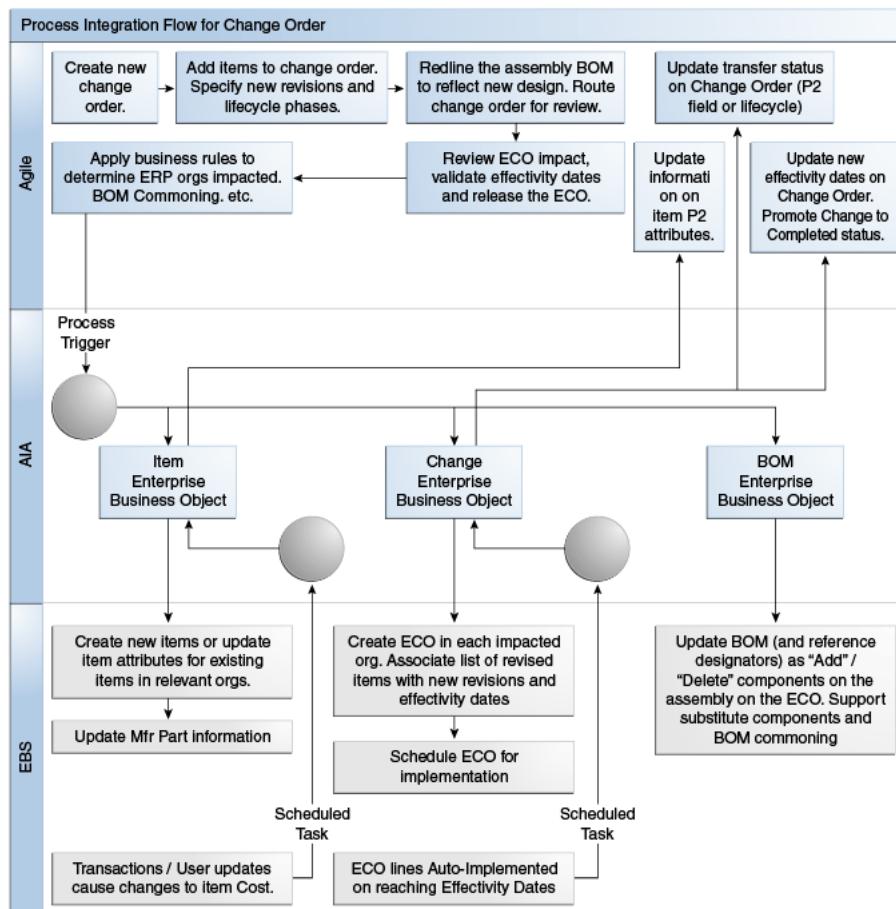

## 1.5 Oracle E-Business Suite to Agile PLM Process Flows

The integration also addresses these key concepts of Design for Supply Chain with an optional bi-directional synchronization (from Oracle E-Business Suite/PIM to Agile PLM) of supply chain data, such as item Lead Times, Costs and On-hand Quantities (calculated by Organization), or any other E-Business or PIM Item Master attributes.

The Oracle E-Business Suite to Agile PLM process flows supported by this integration includes:

- Process integration for item attribute update
- Process integration for item balance update
- Process integration for change order update

### 1.5.1 Process Integration for Item Attribute Update

As a necessary part of the manufacturing update process, the ability to update a change order line in Agile PLM with updates on the cost and other item attributes from the Oracle E-Business Suite/PIM system is a key component of the bidirectional synchronization capability of the integration.

This process is done through a batch operation.


### 1.5.2 Process Integration for Item Balance Update

The item balance information in the Oracle E-Business Suite/PIM system is stored in three attributes: Reserved Quantity, Available Quantity, and On-hand Quantity. An item in Oracle E-Business Suite/PIM can exist in more than one organization. Any change in any of the three types of quantities can take place in just one, or in a few, or in all organizations. These changes are updated in Agile PLM.

This process is done through a batch operation.

[Figure 1-3](#) illustrates the item balance and item attributes information to Agile PLM process integration flow:

**Figure 1-3 Item balance and item attributes flow**

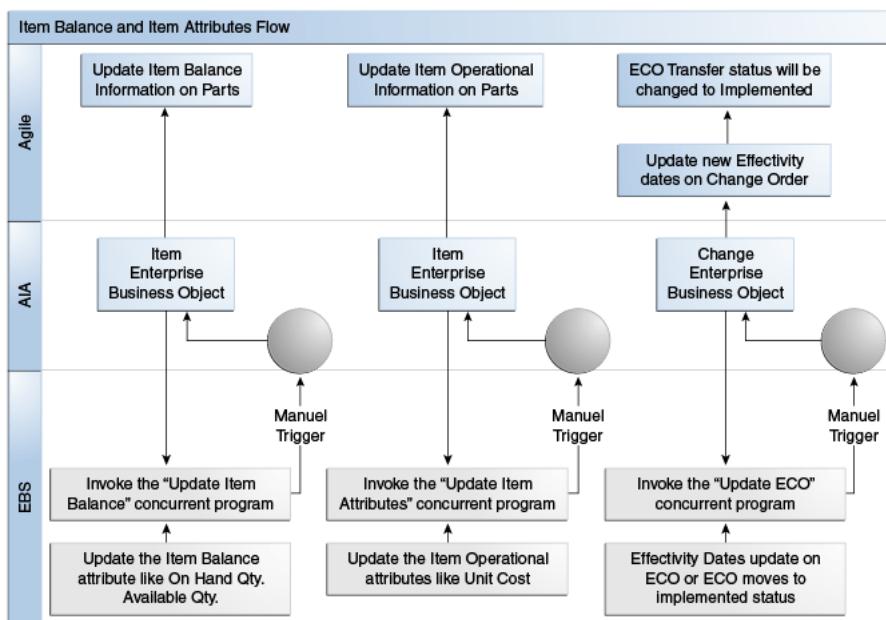

### 1.5.3 Process Integration for Change Order Update

The change order update from Oracle E-Business Suite to Agile PLM process flow is a means to communicate change in status of the change order in Oracle E-Business Suite/PIM (also part of the manufacturing update business flow). It constitutes a key requirement for keeping users in Agile PLM informed about the life cycle of a change order. This involves communicating the change order status in Oracle E-Business Suite/PIM to a configurable field on the change order in Agile PLM or changing the status of the change order in Agile PLM.

This process is done through a batch operation.

## 1.6 Components of Agile PLM Integration Pack for Oracle E-Business Suite Integration

This integration has the following components:

- Agile PLM Content Service (ACS)
- Software Development Kit (SDK)
- Agile Process eXtensions (PX)
- Web Service Extensions (WSX)
- Oracle Application Integration Architecture (AIA) Foundation Pack
- Oracle E-Business Suite
- Oracle Generic Configurator User Interface

### 1.6.1 ACS

ACS is an event-driven XML-based publishing service that makes the product record available to a wide variety of business applications and users, both internally and across the global manufacturing network. In addition to allowing employees and supply chain partners to publish the product record on demand, ACS can be configured to publish the item master, Bills of Material (BOM), and Approved Manufacturer List (AML) changes automatically during any phase of the product life cycle to multiple destinations, ensuring that everyone is working with current information.

The output generated by an ACS module is an aXML file or a Product Data Exchange (PDX) package.

### 1.6.2 SDK

SDK contains a collection of tools, application programming interfaces (APIs), sample applications, and documentation. You use it to build custom applications that access Agile Application Server functionality. By using the Agile SDK, you can create programs that perform tasks automatically against Agile PLM.

Agile SDK enables the following operations:

- Integrate Agile PLM with JD Edwards EnterpriseOne or other custom applications.
- Develop applications to process product data.
- Perform batch operations against the Agile Application Server.

Agile SDK has the following modules:

- Agile API: A Java API with interfaces that expose Agile PLM business objects. Use Agile API to create additional Agile PLM clients. You can also use it as part of an extension developed using web service extensions (WSX) or process extensions (PX).
- PX: A framework that allows Agile PLM customers to extend the functionality of Agile PLM clients by adding external reports, user-driven and workflow-driven customized actions, customized tools, and customized automatic number sources. PX helps in binding the data in Agile PLM with other applications.

The new part request and the item synchronization are the only process integrations that use PX to extract Agile PLM's data and send it to ABCS.

- WSX: A framework that allows Agile PLM customers to extend the functionality of the Agile PLM server and expose customer-specific solutions using a web service.

WSX is a Web service engine enabling communication between Agile PLM and disparate systems both internal and external, including Enterprise Resource Planning (ERP) systems. WSX can be used to provide content to exchanges, reports, and custom applications and import product content data from ERP and other supply chain applications. WSX can simplify the process for aggregating raw product content and making critical product content available in realtime to other core systems.

For more information about Agile PLM components, see *"Agile Product Lifecycle Management Administrator Guide"* and *"SDK Developer Guide."*

### 1.6.3 Oracle Application Integration Architecture Foundation Pack

Oracle Application Integration Architecture (AIA) Foundation Pack enables customers to simplify cross-application business process integrations using a standards-based, pre-built integration solution. Designed to promote rapid deployment, re-usability, and configurability of business processes, AIA Foundation Pack saves significant time, effort and cost, compared to building integrations from the ground up and helps you realize the value of a Service Oriented Architecture (SOA) at an accelerated pace.

Pre-built integrations are specific to business processes and applications. Built using AIA Foundation Pack, these specific business process integrations provides an open, standards-based approach for organizations to integrate end-to-end business processes across a broad range of custom, Oracle or third-party applications.

For more information about the AIA Foundation Pack development methodology, see *Oracle Fusion Middleware Developer's Guide for Oracle Application Integration Architecture Foundation Pack 11g Release 1*.

### 1.6.4 Oracle E-Business Suite

The following application services of Oracle E-Business participate in this integration:

- Oracle Integration Repository
- Business Event System
- Concurrent Programs/Manager

#### 1.6.4.1 Oracle Integration Repository

An integral part of Oracle E-Business Suite, Oracle Integration Repository is a compilation of information about numerous interface endpoints exposed by Oracle applications. It provides a complete catalog of Oracle E-Business Suite's business interfaces and a comprehensive view of the interface mechanisms available. It can be used to easily discover and deploy the appropriate business interface from the catalog for integration with any system, application, or business partner.

#### 1.6.4.2 Business Event System

Business Event System is an application service that uses the Oracle Advanced Queuing (AQ) infrastructure to communicate business events between systems. It consists of the Event Manager, which enables you to register subscriptions to significant events and event activities, which enable you to model business events within workflow processes. When a local event occurs, the subscribing code is run in the same transaction as the code that raised the event. Subscription processing can

include running custom code on the event information, sending event information to a workflow process, and sending event information to other queues or systems.

#### 1.6.4.3 Concurrent Programs/Manager

Concurrent processing is an Oracle applications feature that allows non-interactive and potentially long-running functions, which may involve a large number of data-intensive computations to be run efficiently alongside interactive operations. It uses operating system facilities to facilitate background scheduling of data or resource-intensive jobs through a set of programs and forms. To ensure that resource-intensive concurrent processing operations do not interfere with interactive operations, a specialized server, the Concurrent Processing server, runs them.

#### 1.6.4.4 Oracle Generic Configurator User Interface

Oracle Configurator (CZ) is a best-of-breed solution encompassing the design and implementation cycle for configuration models and the end-user, runtime configuration sessions.

Configuration models (model structure, rules, and UI) are created and maintained through the Oracle Configurator Developer. Oracle Configurator Developer gives product specialists (not programmers) the range and flexibility to model all products, services, and portfolios from simple to complex. Oracle Configurator Developer was designed to reinforce a rapid application implementation process and contains integrated functions for quickly deploying complete configuration solutions, which include:

- Utilizing product data from ERP or other enterprise systems.
- Modeling configurations and product, service, and system relationships.
- Applying business rules to product data.
- Specifying customized user-interface layouts.
- Testing and debugging Oracle Configurator applications.

The Generic Configurator User Interface can be accessed by Agile PLM Variant Management to configure a model option BOM. Generic Configurator user interfaces (UIs) are not created in Oracle Configurator Developer. These UIs display only BOM Model items and enforce only implicit BOM rules. In other words, any Model structure nodes, rules, or UI elements that are defined in Configurator Developer are not available in a Generic Configurator UI. This is because Generic Configurator UIs access Model Option BOM data directly from the Oracle Bills of Material database tables, not from the CZ schema.

---

**Note:** Although Oracle Generic Configurator User Interface can be used with both Agile PLM 9.3 and 9.2.2.x versions, the Configurator User Interface is available only in 9.3. In addition, process integrations described in this guide support the Agile PLM 9.3 Variant Management sub-items Model and Option Class, as well as their attributes Minimum, Maximum, Optional, and Mutually Exclusive with the Generic Configurator User Interface.

---

The following Enterprise Business Messages (EBMs) have been designed for Agile PLM 9.3 Variant Management to work with the Oracle Generic Configurator User Interface:

- GetConfiguratorURLEBM

- GetConfiguratorURLResponseEBM
- SyncBillOfMaterialsConfigurationListEBM
- 

These EBMs are required to accomplish the UI integration to Oracle E-Business Suite Configurator with AIA. Details such as the configured BOM, connection details, or response information for Agile PLM 9.3 Variant Management have to be transferred through AIA.

Variant Management Configurator integration uses the BillOfMaterialsConfiguration Enterprise Business Object (EBO). It carries only the configuration of the BOMs, which was configured in Oracle E-Business Suite Configurator.

For Agile PLM 9.3 Variant Management, the following flows are used:

1. GetConfiguratorURL: Uses GetConfiguratorURLEBM and GetConfiguratorURLResponseEBM
  - GetConfiguratorURLEBM: Carries the return URL, the model ID, and the organization code combination
  - GetConfiguratorURLResponseEBM: Carries the Configurator URL and the Init XML message
2. SyncBillOfMaterialsConfigurationList: Uses SyncBillOfMaterialsConfigurationListEBM
  - SyncBillOfMaterialsConfigurationListEBM: Carries the instance BOM information configuration using Oracle E-Business Suite Configurator

---

# Process Integration for Item Attribute Update

This chapter provides an overview of the process integration for item attribute update and discusses:

- Item attribute update process integration
- Solution assumptions and constraints
- Agile Product Lifecycle Management (PLM) interfaces
- Oracle E-Business Suite interfaces
- Core Application Integration Architecture (AIA) services
- Integration services

## 2.1 Overview

Agile is the master for part and product information. Oracle E-Business Suite manages certain business related information related to the parts such as Cost. This business information is regularly updated in Oracle E-Business and it is important to provide visibility to this information in the product development environment (PLM). The process integration for item attribute update supports the update of item attributes. Update of other attributes can also be supported through extensions during implementation.

The item attributes information from Oracle E-Business Suite is updated in Agile PLM as part of the manufacturing update process for product information synchronization through a batch process. The term item applies to both parts and documents in Agile PLM.

## 2.2 Item Attribute Update Process Integration

Item attribute update is done in a batch mode by means of a scheduled process. This means that mapped attribute information is read for a group of items in Oracle E-Business Suite and sent through the interface. Because this process does not use specific event triggers, identifying from the source system which of the mapped item attributes really changed in the elapsed period is not easy. The update process, therefore, updates all the mapped attributes every time an item is updated with information from Oracle E-Business Suite. The update step can process all the items in the batch before committing or it can commit each item individually before moving on to the next one.

The item attribute update process includes:

1. Item attributes are modified in Oracle E-Business.

This modification could be done in specific organizations or in a single organization. You can designate, as a part of a configuration parameter, a single Oracle E-Business Suite organization from which all item attribute information is always retrieved. In such a case, it is not necessary to have Agile PLM multi-sites. Any Title Block or Page Two attribute may be updated with Oracle E-Business Suite data in such a case.

2. The input for this process consists of a batch of item attributes with their unique identifiers and values that need to be updated in Agile PLM.
3. The batch process for publishing the changed information starts at a specified frequency, which is configurable.

---

**Note:** While the update to information in Agile PLM is normally driven through the scheduled batch processes, it is also possible to trigger the information update event from Oracle E-Business Suite through the Integrations Administrator and running the Publish Engineering Change Order Updates function.

---

4. The process retrieves the last date and time where the item information update process completed successfully.
5. The process retrieves the list of items whose attributes have changed after the last successful run.

Also, it retrieves the list of mapped attribute values for these items. The data is retrieved from one or more organizations as per site-org mappings or from the configured single organization.

6. Item attribute information can exist in multiple organizations in Oracle E-Business Suite.

Therefore, the integration supports multiple organizations only when the system can accurately determine to which organizations in Oracle E-Business Suite the item attribute information belongs to.

7. In the case of a single site environment:

- Sites are mapped to the Oracle E-Business organizations through a specified P2 attribute (example, P2.ebiz Org)
- Item attributes are retrieved from the specified organization and updated in the mapped attributes in Agile PLM
- In case an item is mapped to multiple organizations, the values from the first Organization in the transformed XML file are picked up for update

8. In the case of multi-site environment:

- The attribute to be updated is defined on the Site tab of the item in Agile PLM
- Based on the update of the item attribute value in an Organization, the change is reflected in the mapped attribute in the corresponding Site.

9. The process updates the information in Agile. If the complete update is processed successfully, the process updates the date and time of last successful run.


If the update process for an item errors out, the system continues to process remaining items in the batch. A list of all errors encountered when processing the batch are accumulated and logged.

10. A status code indicating whether all the items in the batch were updated successfully is returned, along with an error message, if an exception occurred.

The error message contains a cumulative log of all the exceptions that occurred during processing of the items.

[Figure 2-1](#) illustrates the integration sequence for item attribute update from Oracle E-Business Suite to Agile PLM:

**Figure 2-1 Sequence diagram for item attribute update**

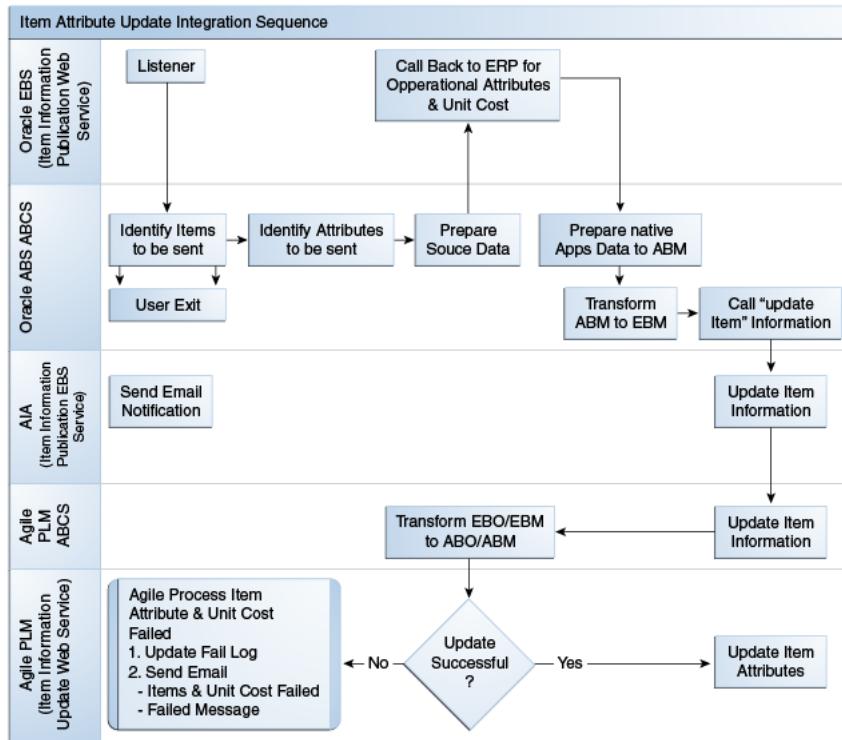


## 2.2.1 Exceptions

The following exception conditions create error messages for this integration process:

- Insufficient privilege to discover, read, add attachment to or update attributes on the Change object
- Invalid field value (indicate the field for which the value is incorrect, and the value that is being passed on to the field)
- Change object does not exist
- Error when adding attachment

## 2.2.2 Item Attribute Update Integration Services Orchestration

[Figure 2-2](#) illustrates the item attribute update integration services orchestration:

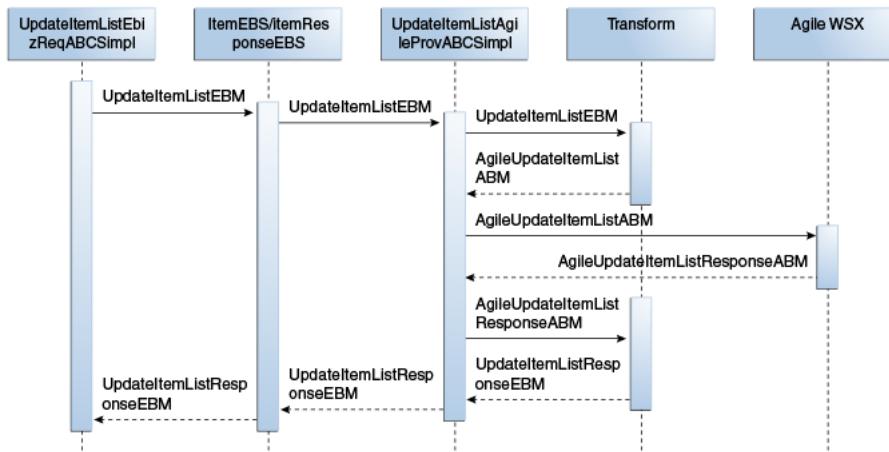**Figure 2–2 Item attribute update integration services orchestration**

**Table 2–1** list the activities involved in the item attribute update integration services orchestration:

**Table 2–1 Activities in Item Attribute Update Integration Service**

Step	Activity	Remarks
1	Publish item attributes concurrent program is initiated.	The publish item attributes concurrent program in Oracle E-Business Suite invokes UpdateItemListEbizReqABCImpl.
2	UpdateItemListEbizReqABCImpl invokes ItemEBSV2.	An invoke activity in UpdateItemListEbizReqABCImpl invokes the UpdateItemList operation on ItemEBSV2 with UpdateItemListEBM as input.
3	ItemEBSV2 routes the UpdateItemListEBM to UpdateItemListAgileProvABCImpl.	ItemEBSV2 routes UpdateItemListEBM as input to UpdateItemListAgileProvABCImpl.
4	UpdateItemListAgileProvABCImpl invokes Agile PLM's Item Operational Attribute Update Web service.	<p>UpdateItemListAgileProvABCImpl transforms UpdateItemListEBM to AgileUpdateItemListABM and invokes the UpdateItemList service operation on the Agile PLM Web service to update the item cost-related attribute information from Oracle to Agile PLM.</p> <p>AgileUpdateItemListResponseABM is returned to UpdateItemListAgileProvABCImpl.</p> <p><b>Note:</b> The UpdateItemListAgileProvABCImpl composite uses the oracle/wss_http_token_client_policy client security policy while calling ItemABS Service hosted on the Agile server. The security credentials for this are stored in the csf-key AgileWebServicesKey on Fusion Middleware (FMW). The Agile username and password need to be setup correctly so that the Agile service is invoked successfully from the AIA composite in the FMW layer.</p>

**Table 2-1 (Cont.) Activities in Item Attribute Update Integration Service**

Step	Activity	Remarks
5	UpdateItemListAgileProvABCSImpl sends a response to ItemResponseEBSV2.	UpdateItemListAgileProvABCSImpl transforms AgileUpdateItemListResponseABM to UpdateItemListListResponseEBM and sends it to ItemResponseEBSV2.
6	ItemResponseEBSV2 sends UpdateItemListListResponseEBM to UpdateItemListEbizReqABCSImpl.	ItemResponseEBSV2 sends UpdateItemListListResponseEBM to UpdateItemListEbizReqABCSImpl.

## 2.3 Solution Assumptions and Constraints

If item information must be retrieved from multiple organizations in Oracle E-Business Suite, the following constraints must be met to support this process:

1. Agile PLM multisites must be configured.
2. A one-to-one mapping between Agile PLM sites and Oracle E-Business Suite organizations exists.  
This is derived from the AGILE\_TARGET\_SITE\_MAPPING DVM.
3. The attributes to be updated with Oracle E-Business Suite data are on the Sites tab of the item.  
Alternatively, customers can designate, as a part of configuration parameters, a single Oracle E-Business Suite organization from which all item attributes and on-hand quantity information is always retrieved. In such a case, you do not need to have the Agile PLM multisites. Any Title Block or Page Two attribute can be updated with Oracle E-Business Suite data in such a case.
4. All changes are interfaced to only one destination system.
5. With the current release of Agile PLM, attributes are applied at the master data level. This means that an attribute cannot have different values across different part revisions.
6. Only the item number is used to query the item to be updated and all updates are made to the latest released revision of the item.

---

**Note:** New item creation is not part of the scope for this activity. The assumption is that the item exists in both Agile PLM and Oracle E-Business Suite, by means of a prior New Part Introduction or independent offline load processes.

---

## 2.4 Agile PLM Interfaces

Table 2-2 lists the Agile PLM Web Services Definition Language (WSDL) files:

**Table 2-2 Agile PLM Web Services Definition Language (WSDL) files**

Interface	Description
UpdateItemListAgileProvABCSImpl	

**Table 2–2 (Cont.) Agile PLM Web Services Definition Language (WSDL) files**

Interface	Description
ItemABS.wsdl	Used to update an item attribute information in Oracle E-Business Suite

Table 2–3 lists the Agile PLM XML Schema Definition (XSD) files:

**Table 2–3 Agile PLM XML Schema Definition (XSD) files**

Interface	Description
UpdateItemListAgileProvABCSImpl	
ItemABM.xsd	Contains the update item list request and response ABO/ABM
ItemABO.xsd	

## 2.5 Oracle E-Business Suite Interfaces

Table 2–4 lists the Oracle E-Business Suite WSDL files:

**Table 2–4 Oracle E-Business Suite WSDL files**

Interface	Description
UpdateItemListEbizReqABCSImpl	
QueryItemListEbizAdapter.wsdl	Used for the OA adapter "INV_EBI_ITEM_PUB.GET_ITEM_ATTRIBUTES" pl/sql function call

Table 2–5 lists the Oracle E-Business Suite XSD files:

**Table 2–5 Oracle E-Business Suite XSD files**

Interface	Description
UpdateItemListEbizReqABCSImpl	
ItemAttributeABM.xsd	ABM for ItemAttributeABO
ItemAttributeABO.xsd	Created based on the input from the Concurrent Program to the BPEL process and output to the Concurrent Program from the BPEL process
APPS_INV_EBI_ITEM_PUB_GET_ITEM_ATTRIBUTES.xsd	The input and output ABM for the PL/SQL API call are defined in this XSD. The package used is INV_EBI_ITEM_PUB.GET_ITEM_ATTRIBUTES
CommonEbizComponents.xsd	Defines common ResponseType element

## 2.6 Core AIA Components

Table 2–6 lists the industry components for the process integration for item attribute update:

**Table 2–6 industry components for the process integration for item attribute update**

Component	Name
Enterprise Business Object (EBO)	ItemEBO

**Table 2–6 (Cont.) industry components for the process integration for item attribute**

Component	Name
Enterprise Business Message (EBM)	UpdateItemListEBM UpdateItemListResponseEBM
Enterprise Business Service (EBS)	ItemEBSV2 ItemResponseEBSV2

[Table 2–7](#) lists the core components locations:

**Table 2–7 Core components locations**

Component	Location
EBO and EBM XSD files	\$AIA_ HOME/AIAMetaData/AIAComponents/ EnterpriseObjectLibrary/Core/EBO/  \$AIA_ HOME/AIAMetaData/AIAComponents/ ApplicationObjectLibrary /Ebiz/Release1/Core
WSDL files	\$AIA_ HOME/AIAMetaData/AIAComponents/ EnterpriseBusinessServiceLibrary/Core/E BO/  \$AIA_ HOME/AIAMetaData/AIAComponents/ ExtensionServiceLibrary/Ebiz  \$AIA_ HOME/AIAMetaData/AIAComponents/ ApplicationConnectorServiceLibrary/Ebiz /V1

For detailed documentation of individual EBOs and EBMs, click the AIA Reference Doc link on EBO and EBM detail pages in Oracle Enterprise Repository.

For more information, see *Oracle Fusion Middleware Developer's Guide for Oracle Application Integration Architecture Foundation Pack 11g Release 1*, "How to Access Oracle AIA Content in Oracle Enterprise Repository."

EBOs can be extended, for instance, to add new data elements. These extensions are protected and will remain intact after a patch or an upgrade.

For more information, see *Oracle Fusion Middleware Concepts and Technologies Guide for Oracle Application Integration Architecture Foundation Pack 11g Release 1*, "Understanding Extensibility."

## 2.6.1 Oracle E-Business Suite and Agile PLM Components

[Table 2–8](#) lists the Oracle E-Business Suite and Agile PLM components:

**Table 2–8 Oracle E-Business Suite and Agile PLM components**

Services	Oracle E-Business Suite (Requester)	Agile PLM (Provider)
ABMs	UpdateItemListABM	AgileUpdateListABM AgileUpdateListResponseABM

**Table 2–8 (Cont.) Oracle E-Business Suite and Agile PLM components**

Services	Oracle E-Business Suite (Requester)	Agile PLM (Provider)
Application Business Connector Service (ABCs)	UpdateItemListEbizReqABCImpl	UpdateItemListAgileProvABCImpl
EBS	ItemEBSV2	ItemResponseEBSV2
Adapter service	QueryItemListEbizAdapter	---

**Table 2–9** lists the core components locations:

**Table 2–9 Core components locations**

Component	Location
Application Business Objects, ABM, and Common XSD files	\$AIA_HOME/AIAMetaData/AIAComponents/ApplicationObjectLibrary /Agile PLM/V1/schemas \$AIA_HOME/AIAMetaData/AIAComponents/ApplicationObjectLibrary /Ebiz/V1/schemas \$AIA_HOME/AIAMetaData/AIAComponents/ApplicationObjectLibrary /Ebiz/Release1/Core
WSDL files	\$AIA_HOME/AIAMetaData/AIAComponents/ApplicationObjectLibrary /Agile PLM/V1/wsdl \$AIA_HOME/AIAMetaData/AIAComponents/ApplicationObjectLibrary /Ebiz/wsdl \$AIA_HOME/AIAMetaData/AIAComponents/ExtensionServiceLibrary/Ebiz \$AIA_HOME/AIAMetaData/AIAComponents/ApplicationConnectorServiceLibrary/Ebiz/V1

## 2.7 Integration Services

The integration services for the item attribute update are:

- ItemEBSV2
- UpdateItemListEbizReqABCImpl
- UpdateItemListAgileProvABCImpl

### 2.7.1 ItemEBSV2

ItemEBSV2 is the Enterprise Business Services (EBS) that exposes the following operations related to the item attribute update integration flow in relation to the ItemEBO.

The following list itemizes the routing rules:

- ItemEBSV2 service
  - UpdateItemList: Routes UpdateItemListEBM to UpdateItemListAgileProvABCSImpl
- ItemResponseEBSV2 service
  - UpdateItemListResponse: Routes UpdateItemListResponseEBM to UpdateItemListEbizReqABCSImpl

## 2.7.2 UpdateItemListEbizReqABCSImpl

This service is called when multiple items in Agile PLM with all the operational attributes as well as the attributes from Oracle E-Business Suite, such as unit cost, need to be updated. This is a push from Oracle E-Business Suite to Agile PLM through a batch process.

The process includes:

- The requester ABCS, defined as a synchronous process, receives a list of item IDs from the Oracle E-Business Suite concurrent program.
  - The list contains only those IDs that have last\_update\_date greater than the last run date of the concurrent program.
- The requester BPEL process filters the list of IDs to a list of IDs that are present in the cross-reference tables in the Fusion Middleware (FMW) layer.
  - This provides a list of items that are in Agile PLM. The original list of item IDs can contain items that are from the non-Agile PLM sources as well.
- The BPEL process then makes an OA Adapter call to the PL/SQL API, which provides the details of the sent item. This is the item ABM.
- A transformation converts the ABM to an EBM.
  - An asynchronous request-delayed response call is made to ItemEBSV2 with UpdateItemListEBM. This service is routed to the appropriate provider.
- The BPEL instance is reactivated from dehydration store when the asynchronous call returns from the provider and provides the status of the transaction back to the caller concurrent program (because it is a synchronous call).
- The concurrent program logs the status of this call.

## 2.7.3 UpdateItemListAgileProvABCSImpl

The UpdateItemListAgileProvABCSImpl is used to facilitate the communication between the ItemEBSV2 and the Agile PLM Web service used for updating the item attribute information in a batch mode in Agile PLM.

The process includes:

- The UpdateItemListAgileProvABCSImpl receives the UpdateItemListReqMsg that contains the UpdateItemListEBM.
- The transform operation is called to convert the UpdateItemListEBM into the AgileUpdateItemListABM.
- The AgileUpdateItemListABM is sent as input to the Web service operation UpdateItemList (coarse-grained APIs in Agile PLM) to update the items in Agile PLM.

- The AgileUpdateItemListResponseABM is received upon successful implementation of the coarse-grained API.
- The transform operation is called to convert AgileUpdateItemListResponseABM to UpdateItemListResponseEBM, which is returned as an output of this BEPL process.
- If the UpdateItemList service operation fails on the Agile PLM side, a new fault is generated and is sent across with an appropriate error message.

---

## Process Integration for Item Balance Update

This chapter provides an overview of the process integration for item balance update and discusses:

- Item balance update process integration
- Solution assumptions and constraints
- Agile Product Lifecycle Management (PLM) interfaces
- Oracle E-Business Suite interfaces
- Core Application Integration Architecture (AIA) components
- Integration services

### 3.1 Overview

Agile PLM is the master for part and product information. Oracle E-Business Suite manages certain business related information related to the parts such as quantity on hand. This business information is regularly updated in Oracle E-Business and it is important to provide visibility to this information in the product development environment (PLM). The process integration for item balance update supports the update of quantity on hand and item availability

The item balance and availability information from Oracle E-Business Suite is updated in Agile PLM as part of the manufacturing update process for product information synchronization through a batch process. The term item applies to both parts and documents in Agile PLM.

The item balance information is stored in Oracle E-Business Suite in three attributes:

- Reserved Quantity
- Available Quantity
- On-hand Quantity

These three attributes are not available in the delivered application of Agile PLM. To update the item balance information from these three attributes, flex-fields in Agile PLM are configured and mapped. This configuration information is entered in the AIAConfigurationProperties.xml file.

### 3.2 Item Balance Update Process Integration

The update of item balance information from Oracle E-Business Suite to Agile PLM is performed as a batch process.

The item balance update process includes:

1. Item balance information (that is on hand quantity) is modified in Oracle E-Business Suite.  
This modification could be done in specific organizations or in a single Oracle E-Business Suite organization. You can designate, as a part of a configuration parameter, a single Oracle E-Business Suite organization from which all item attribute information is always retrieved. In such a case, it is not necessary to have Agile PLM multi-sites.
2. The input for this process consists of a batch of item on hand quantity or balance information with their unique identifiers and values that need to be updated in Agile PLM.
3. The batch process for publishing the changed information initiates at a specified frequency, which is configurable.

---

**Note:** While the update to information in Agile is normally driven through the scheduled batch processes, it is also possible to trigger the information update event from Oracle E-Business Suite through the Integrations Administrator and running the Publish Engineering Change Order Updates function.

---

4. The process retrieves the last date and time where the item information update process completed successfully.
5. The process retrieves the list of items whose on hand quantity has changed after the last successful run.

In addition, it retrieves the list of mapped attribute values for these items. The data is retrieved from one or more organizations as per site-org mappings or from the configured single organization.

Item balance information can exist in multiple organizations in Oracle E-Business Suite. Any change in any of the three types of attributes (reserve quantity, available quantity or on hand quantity) may take place in just one, or in a few, or in all organizations. Oracle E-Business Suite determines which organization corresponds (maps) to which flex-field in Agile PLM using the Domain Value Map (DVM) AGILE\_TARGET\_SITE\_MAPPING.

In the case of a single site environment:

- Sites are mapped to the Oracle E-Business organizations through a specified P2 attribute (example, P2.ebiz Org)
- Item balance information is retrieved from the specified organization and updated in the mapped attributes in Agile
- In case an item is mapped to multiple organizations, the values from the first Organization in the transformed XML file are picked up for update

In the case of multi-site environment:


- The attribute to be updated is defined on the Site tab of the item in Agile PLM.
- Based on the update of the item attribute value in an Organization, the change is reflected in the mapped attribute in the corresponding Site.

The process updates the information in Agile PLM.

If the complete update is processed successfully, the process updates the date and time of last successful run. If the update for an item fails, the system continues to process other items in the batch. A list of all errors encountered when processing the batch are accumulated and logged.

[Figure 3-1](#) illustrates the integration sequence for item balance update from Oracle E-Business Suite to Agile PLM:

**Figure 3-1 Integration sequence for item balance update**

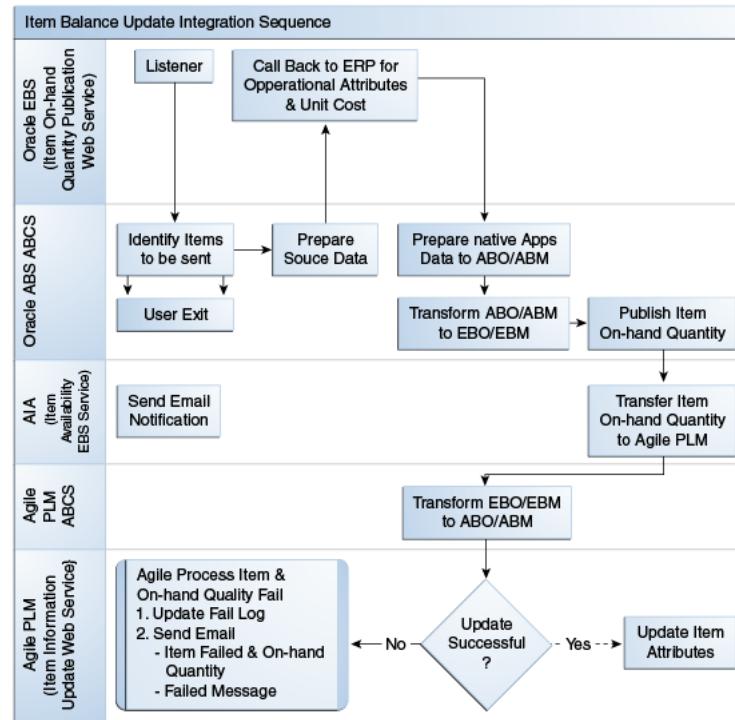


### 3.2.1 Exceptions

The following exception conditions create error messages for this integration process:

- Insufficient privilege to discover, read, add attachment to or update attributes on the Change object
- Invalid field value (indicate the field for which the value is incorrect, and the value that is being passed on to the field)
- Change object does not exist
- Error when adding attachment

### 3.2.2 Item Balance Update Integration Services Orchestration

[Figure 3-2](#) illustrates the item balance update integration services orchestration:

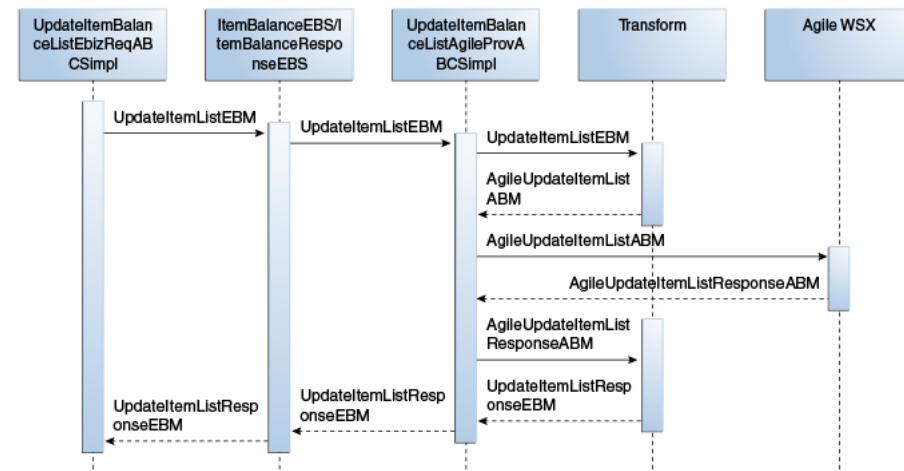**Figure 3–2 Item balance update integration services orchestration**

**Table 3–1** lists the activities involved in the item balance update integration services orchestration:

**Table 3–1 Activities in Item Balance Update integration services orchestration**

#	Activity	Remarks
1	Publish Item Balance concurrent program is initiated.	The Publish Item Balance concurrent program in Oracle E-Business Suite invokes UpdateItemBalanceListEbizReqABCSimpl.
2	UpdateItemBalanceListEbizReqABCSimpl invokes ItemBalanceEBS.	An invoke activity in UpdateItemBalanceListEbizReqABCSimpl invokes UpdateItemBalanceList operation on ItemBalanceEBS with UpdateItemBalanceList EBM as input.
3	ItemBalanceEBS invokes UpdateItemBalanceListAgileProvABCSimpl	ItemBalanceEBS sends UpdateItemBalanceListEBM message as input to the UpdateItemBalanceListAgileProvABCSimpl service.
4	UpdateItemBalanceListAgileProvABCSimpl invokes Agile PLM's Item Balance Web service.	UpdateItemBalanceListAgileProvABCSimpl transforms UpdateItemBalanceListEBM to the AgileUpdateItemListABM message and invokes the UpdateItemList service operation on Agile PLM Web Service to update Item On-Hand Quantity information from Oracle to Agile PLM.  AgileUpdateItemListResponseABM is returned to the UpdateItemBalanceListAgileProvABCSimpl service.  <b>Note:</b> The UpdateItemBalanceAgileProvABCSimpl composite uses the oracle/wss_http_token_client policy client security policy while calling the ItemABS service hosted on the Agile server. The security credentials for this are stored in the csf-key AgileWebServicesKey on Fusion Middleware (FMW). The Agile username and password need to be setup correctly so that the Agile service is invoked successfully from the AIA composite in the FMW layer.

**Table 3-1 (Cont.) Activities in Item Balance Update integration services orchestration**

#	Activity	Remarks
5	UpdateItemBalanceListAgileProvABCSImpl sends the response to ItemBalanceResponseEBS.	UpdateItemBalanceListAgileProvABCSImpl transforms AgileUpdateItemBalanceListResponseABM to UpdateItemBalanceListResponseEBM and returns it to ItemBalanceResponseEBS.
6	ItemBalanceResponseEBS sends UpdateItemBalanceListResponseEBM to UpdateItemBalanceListEbizReqABCSImpl.	UpdateItemBalanceListEbizReqABCSImpl sends the response to the concurrent program in Oracle E-Business Suite.

### 3.3 Solution Assumptions and Constraints

If item balance information must be retrieved from multiple organizations in Oracle E-Business Suite, the following constraints apply for an end-to-end process integration:

1. Agile PLM multisites must be configured.
2. A one-to-one mapping between the Agile PLM sites and Oracle E-Business Suite organizations exists.

This is derived from the AGILE\_TARGET\_SITE\_MAPPING DVM.

3. The attributes to be updated with Oracle E-Business Suite data are on the Sites tab of the item if the Agile PLM multisites are configured.

Alternatively, customers can designate, as a part of configuration parameters, a single Oracle E-Business Suite organization from which available quantity information is always retrieved. In such a case, you do not need to have Agile PLM multisites. Any Title Block or Page Two attribute can be updated with Oracle E-Business Suite data in such a case.

4. All changes are interfaced to only one destination system.
5. With the current release of Agile PLM, attributes are applied at the master data level.

This means that an attribute cannot have different values across different part revisions.

6. Only the item number is used to query the item to be updated and all updates are made to the latest released revision of the item.

---

**Note:** New item creation is not part of the scope for this activity. The assumption is that the item exists in both Agile PLM and Oracle E-Business Suite, by means of a prior New Part Introduction or independent offline load processes.

---

### 3.4 Agile PLM Interfaces

Table 3-2 lists the Agile PLM Web Services Definition Language (WSDL) files:

**Table 3–2 Agile PLM Web Services Definition Language (WSDL) files**

Interface	Description
UpdateItemBalanceListAgileProvABCSImpl	
ItemABS.wsdl	Used to update an item balance information in Agile PLM

Table 3–3 lists the Agile PLM XML Schema Definition (XSD) files:

**Table 3–3 Agile PLM XML Schema Definition (XSD) files**

Interface	Description
UpdateItemBalanceListAgileProvABCSImpl	
ItemABM.xsd	Contains the update item balance information request and response ABO and ABM
ItemABO.xsd	

## 3.5 Oracle E-Business Suite Interfaces

Table 3–4 lists the Oracle E-Business Suite WSDL files:

**Table 3–4 Oracle E-Business Suite WSDL files**

Interface	Description
UpdateItemBalanceListEbizReqABCSImpl	
QueryItemBalanceListEbizAdapter.wsdl	Used for the OA adapter "INV_EBI_ITEM_PUB.GET_ITEM_BALANCE" pl/sql function call

Table 3–5 lists the Oracle E-Business Suite XSD files:

**Table 3–5 Oracle E-Business Suite XSD files**

Interface	Description
UpdateItemBalanceListEbizReqABCSImpl	
ItemBalanceABM.xsd	ABM for ItemBalanceABO
ItemBalanceABO.xsd	Created based on the input from the Concurrent Program to the BPEL process and output to the Concurrent Program from the BPEL process
APPS_INV_EBI_ITEM_PUB_GET_ITEM_BALANCE.xsd	The input and output ABM for the PL/SQL API call are defined in this XDS. The package used is INV_EBI_ITEM_PUB.GET_ITEM_BALANCE
CommonEbizComponents.xsd	Defines common ResponseType element

## 3.6 Core AIA Components

Table 3–6 lists the industry components for the process integration for item balance update:

**Table 3–6 Industry Components for Item Balance Update**

Component	Name
Enterprise Business Object (EBO)	ItemBalanceEBO
Enterprise Business Message (EBM)	UpdateItemBalanceListEBM UpdateItemBalanceListResponseEBM
Enterprise Business Service (EBS)	ItemBalanceEBS ItemBalanceResponseEBS

Table 3–7 lists the core components locations:

**Table 3–7 Core Component Locations**

Component	Name
EBO and EBM XSD files	\$AIA_HOME/AIAMetaData/AIAComponents/EnterpriseObjectLibrary/Core/EBO/ \$AIA_HOME/AIAMetaData/AIAComponents/ApplicationObjectLibrary/Ebiz/Release1/Core
WSDL files	\$AIA_HOME/apps/AIAMetaData/AIAComponents/EnterpriseBusinessServiceLibrary/Core/EBO/ \$AIA_HOME/AIAMetaData/AIAComponents/ExtensionServiceLibrary/Ebiz \$AIA_HOME/AIAMetaData/AIAComponents/ApplicationConnectorServiceLibrary/Ebiz/V1

For detailed documentation of individual EBOs and EBMs, click the AIA Reference Doc link on EBO and EBM detail pages in Oracle Enterprise Repository.

For more information, see *Oracle Fusion Middleware Developer's Guide for Oracle Application Integration Architecture Foundation Pack 11g Release 1*, "How to Access Oracle AIA Content in Oracle Enterprise Repository."

EBOs can be extended, for instance, to add new data elements. These extensions are protected and will remain intact after a patch or an upgrade.

For more information, see *Oracle Fusion Middleware Concepts and Technologies Guide for Oracle Application Integration Architecture Foundation Pack 11g Release 1*, "Understanding Extensibility."

### 3.6.1 Oracle E-Business Suite and Agile PLM Components for Item Balance Update

Table 3–8 lists the Oracle E-Business Suite and Agile PLM components:

**Table 3-8 Oracle E-Business Suite and Agile PLM Components**

Services	Oracle E-Business Suite (Requester)	Agile PLM (Provider)
ABMs	ItemBalanceABM.xsd	AgileUpdateItemBalanceListABM AgileUpdateItemBalanceListResponseABM
Application Business Connector Service (ABCs)	UpdateItemBalanceListEbizReqABCImpl	UpdateItemBalanceListAgileProvABCImpl
EBS	ItemBalanceEBS	ItemBalanceResponseEBS
Adapter service	QueryItemBalanceListEbizAdapter	---

[Table 3-9](#) lists the core components locations:

**Table 3-9 Core Component Locations**

Component	Location
Application Business Objects, ABM, and Common XSD files	\$AIA_HOME/AIA_MetaData/AIAComponents/ApplicationObjectLibrary/Agile PLM/V1/schemas \$AIA_HOME/AIA_MetaData/AIAComponents/ApplicationObjectLibrary/Ebiz/V1/schemas \$AIA_HOME/AIA_MetaData/AIAComponents/ApplicationObjectLibrary/Ebiz/Release1/Core
WSDL files	\$AIA_HOME/AIA_MetaData/AIAComponents/ApplicationObjectLibrary/Agile PLM/V1/wsdl \$AIA_HOME/AIA_MetaData/AIAComponents/ApplicationObjectLibrary/Ebiz/wsdl \$AIA_HOME/AIA_MetaData/AIAComponents/ExtensionServiceLibrary/Ebiz \$AIA_HOME/AIA_MetaData/AIAComponents/ApplicationConnectorServiceLibrary/Ebiz/V1

## 3.7 Integration Service

The integration services for the item balance update are:

- ItemBalanceEBS
- UpdateItemBalanceListEbizReqABCImpl
- UpdateItemBalanceListAgileProvABCImpl

### 3.7.1 ItemBalanceEBS

ItemBalanceEBS is the Enterprise Business Services (EBS) that exposes the following operations related to the item availability attributes update integration on the ItemBalanceEBO.

The following list itemizes the routing rules:

- ItemBalanceEBS service

UpdateItemBalanceList: Routes the UpdateItemBalanceListEBM to the UpdateItemBalanceListAgileProvABCSImpl

- ItemBalanceResponseEBS service
- UpdateItemBalanceListResponse: Routes the UpdateItemBalanceListResponseEBM to the UpdateItemBalanceListEbizReqABCSImpl

### 3.7.2 UpdateItemBalanceListEbizReqABCSImpl

This service is called when a participating application needs to update multiple item balance attributes on their system such as on-hand quantity from Oracle E-Business Suite. This is a push from Oracle E-Business Suite to the other participating application through a batch process.

The process includes:

- The requester ABCS, defined as a synchronous process, receives a list of item IDs from the Oracle E-Business Suite concurrent program.

The list contains the IDs that have last\_update\_date greater than the last run date of the concurrent program.

- The requester Business Process Execution Language (BPEL) process filters the list of IDs to a list of IDs that are present in the cross-reference tables in the Fusion Middleware (FMW) layer.

This provides a list of Items that are in the Agile PLM application. The original list of Item IDs can contain items that are from non-Agile PLM sources as well.

- The BPEL process then makes an OA Adapter call out that calls the PL/SQL API, which provides the details of the sent item.

This is an ItemBalance Application Business Message (ABM).

- A transformation converts the ABM to an EBM.

- An asynchronous request-delayed response call is made to the ItemBalanceEBS with the ItemBalanceListEBM.

This service is routed to the appropriate provider.

- The BPEL instance is reactivated from dehydration store when the asynchronous call returns from the provider and provides the status of the transaction back to the caller concurrent program (because that is a synchronous call).

It is a scheduled call and is invoked from the back end, not from the user interface (UI); hence, it does not affect performance.

- The concurrent program logs the status of this call.

### 3.7.3 UpdateItemBalanceListAgileProvABCSImpl

UpdateItemBalanceListAgileProvABCSImpl is used to facilitate the communication between ItemBalanceEBS and Agile PLM Web service used for updating the item quantity information in a batch mode in Agile PLM.

The process includes:

- The UpdateItemBalanceListAgileProvABCSImpl receives UpdateItemBalanceListReqMsg, which contains UpdateItemBalanceListEBM.

- The transform operation is called to convert `UpdateItemListEBM` into `AgileUpdateItemListABM`.
- `AgileUpdateItemListABM` is sent as input to the Web service operation `UpdateItemList` (Coarse Grained APIs in Agile PLM) to update items in Agile PLM.
- `AgileUpdateItemListResponseABM` is received on the successful run of the Coarse Grained API.
- The transform operation is called to convert `AgileUpdateItemListResponseABM` to `UpdateItemListResponseEBM`, which is returned as output of this BEPL process.
- If the `UpdateItems` service operation fails on the Agile PLM side, a new fault is generated and is sent across with an appropriate error message.

---

## Process Integration for New Part Request

This chapter provides an overview of the process integration for new part request (NPR) and discusses:

- NPR process integration
- Solution assumptions and constraints
- Agile Product Lifecycle Management (PLM) interfaces
- Oracle E-Business Suite interfaces
- Core Application Integration Architecture (AIA) components
- Integration services

### 4.1 Overview

Even though Agile PLM is the system of record for product design and part information, new part numbers may originate in a system outside of Agile PLM. The NPR process sends the new part numbers from Oracle E-Business Suite to Agile PLM. This process can be triggered within Agile PLM in one of the following ways:

**1. Releasing or approving an NPR object in Agile PLM:**

Engineers designing an electronic assembly may need a part that they cannot find in the system. They will then raise a new part request to doc control that will then route it to materials managers for review.

Buyer will look into catalogs offered by the approved manufacturers and find a couple of parts that meet the criteria. They will contact the manufacturers, confirm availability, procure specifications, and then approve the new part request with the new manufacturer part numbers attached to it. Doc control will compile all the information, and assign an internal part number corresponding to the manufacturer parts and inform the engineers.

**2. On-demand by user**

An engineer creating a new part in Agile PLM should be able to get a part number generated from other ERP systems on request without creating an NPR and routing it for approval. This process integration addresses this scenario by invoking a new part request using a Custom Auto Number Process Extension (PX) or an Action menu based Process Extension.

When using the Custom Auto Number process extension, the NPR process is triggered after the AutoNumber option is selected and the item type is passed as the only parameter from Agile PLM to Oracle E-Business Suite to create the part in the Product Information Management (PIM) application.

3. Through the Action menu based process extension, a dummy part is created in Agile PLM and the NPR is triggered from the Action's menu of that part.

The set of mapped item attributes of the dummy part are sent as input to the NPR process and the dummy part number created in Agile is replaced by the actual part number created in Oracle E-Business Suite for the parameters that were sent.

## 4.2 NPR Process Integration

The synchronous new part request process from Agile PLM to E-Business includes:

1. A user in Agile PLM needs a new part number to be used on a design.

In Agile PLM, a user clicks the New Object button to create a new item for a given subclass. The New Part Request process integration complements or replaces the new item creation process in Agile PLM by providing the user a process extension that they can use to trigger the creation of a new item.

2. The user has two options:

- Use the Agile PLM AutoNumber process extension, which triggers the Automatic Part Number generation process. This will be used whenever the part number generation process is generic (mainly using a sequence), and does not require any item attributes to be used when generating the part number. The item type can be passed as the only parameter from Agile PLM to Oracle E-Business Suite to create the part in the PIM application. The AutoNumber PX sends a request to Oracle E-Business Suite, which generates a part number and sends it to Agile PLM.
- Enter a dummy part number in Agile PLM that triggers the NPR process through a process extension from the Action's menu of the part. This part should not exist in Oracle E-Business Suite and therefore, the new part request will have all the required attributes for a part number to be generated in PIM. This is used whenever the user needs to specify the values for one or more item attributes (including item type). The user cannot use the dummy part number in a change order until the part is created in Oracle E-Business Suite and the actual part number is sent to Agile PLM.

3. In the case of the Action menu based process extension, the PX carries out some pre-validations and a set of mapped item attributes.

Certain validations are specific to each customer's environment (and therefore done at the time of implementation by the customer or consultant, and are not pre-packaged with the integration). Examples of such validations are:

- Ensure that the PX is being called for the right type of part. Not all part types may need their part numbers generated in PIM. One of the ways to do so is to ensure that the PX is being called from an item of the right subclass or the right type of dummy item number.
- Ensure that the user calling the PX has the right privilege to generate a new part number in PIM for the item.

4. In the case of the autonumber process extension, the PX carries no input parameters, except for the item type.
5. The PX calls the new part number generation process in PIM, which itself could be a custom function.

In the case of the Action menu based process extension, any attributes values passed from Agile are copied over to the corresponding mapped attributes in PIM.

6. PIM generates the part number and item number.

The item number and description is generated only if the context is Master Organization. If the item description cannot be generated or obtained, PIM sends the item number. If the organization is not passed, the item is created in the Master Organization. If more than one item master organizations exist in an Oracle E-Business Suite installation, then the organization value is obtained from the configuration property value for DEFAULT\_MASTER\_ORG.

7. The new part number is communicated to Agile PLM and is displayed to the user in the item or auto number window.


Optionally, a description may also be auto generated in PIM and sent back to Agile along with the part number.

8. Depending on the type of PX, one of the following events occur:

- If the PX is AutoNumber, the part number from the response ABM is returned to the web client and displayed in the number field in the create item screen.
- If the PX is Action, the response ABM is updated on the part.

Figure 4-1 illustrates the integration sequence for NPR from Agile PLM to Oracle E-Business Suite:

**Figure 4-1** *NPR sequence diagram*

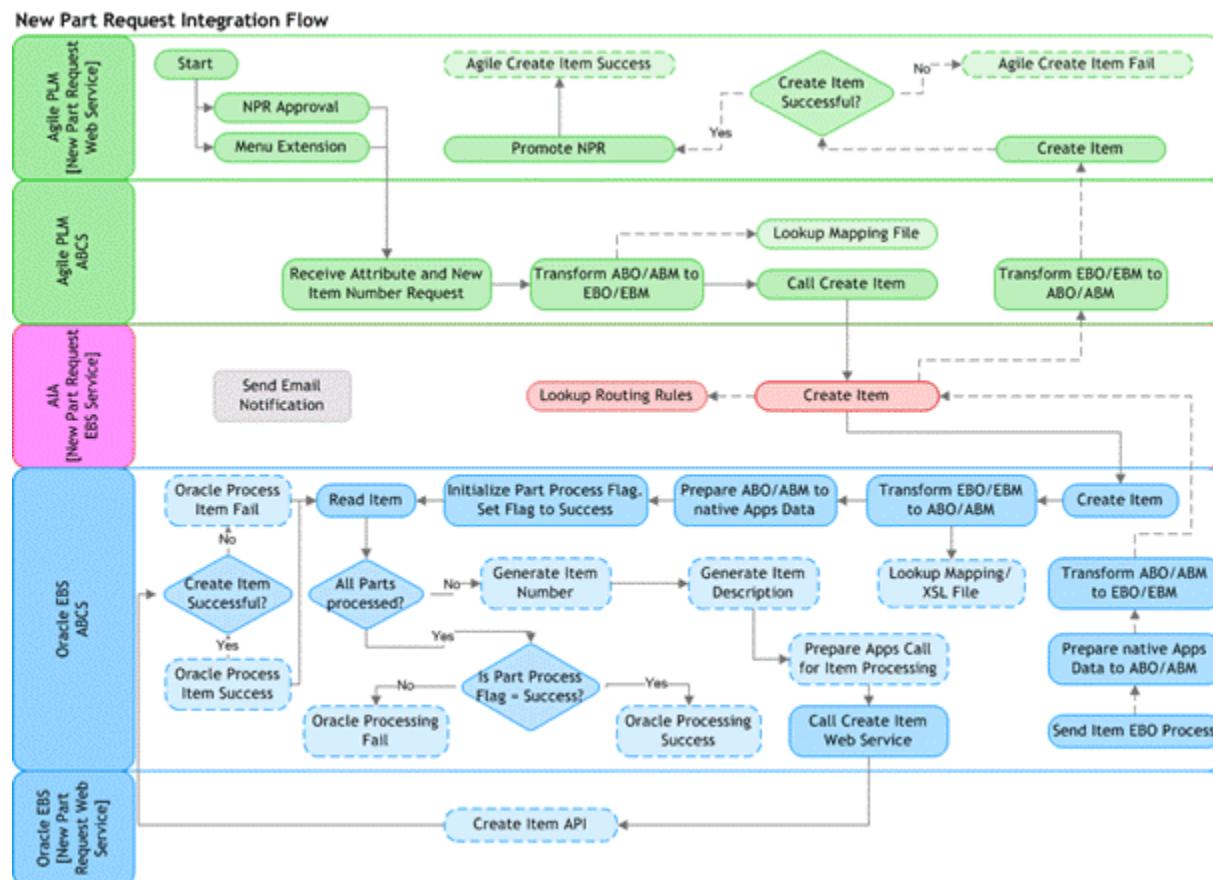

## 4.2.1 Exceptions

The following exception conditions create error messages for this integration process:

- The number/description generation attributes for the item catalog category setup are not passed.
- The item catalog category is not passed or is invalid.
- The context organization is not passed.
- More than one item master organizations exist and the default master organization configuration property is not setup or is invalid.
- The new part request process time out with no result.

## 4.2.2 NPR Integration Services Orchestration

**Table 4-1** lists the NPR integration services orchestration activities:

**Table 4-1** *NPR Integration Services Orchestration Activities*

Step	Activity	Remarks
1	Agile PLM NPRAutonumberPX or NPRActionPX is triggered.	One of these is triggered by an Agile PLM user from the Agile PLM Web client as part of new part creation.
2	Invoke SyncItemListAgileReqABCS with AgileSyncItemListABM as input.	The NPRAutonumberPX or NPRActionPX process invokes SyncItemListAgileReqABCS with AgileSyncItemListABM as input.
3	Invoke SyncItemListAgileReqABCSI impl with AgileSyncItemListABM as input.	SyncItemListAgileReqABCS invokes SyncItemListAgileReqABCSIImpl with AgileSyncItemListABM as input.
4	SyncItemListAgileReqABCSI impl invokes ItemEBSV2 with the SyncItemListEBM operation.	SyncItemListAgileReqABCSIImpl transforms AgileSyncItemListABM into SyncItemListEBM and invokes SyncItemList operation on ItemEBSV2 with SyncItemListEBM as the input.  SyncItemListEBM is routed to Oracle E-Business Suite SyncItemListEbizProvABCSIImpl.

**Table 4-1 (Cont.) NPR Integration Services Orchestration Activities**

Step	Activity	Remarks
5	SyncItemListEbizProvABCImpl transforms and then calls the Oracle E-Business Suite service.	SyncItemListEbizProvABCImpl transforms SyncItemListEBM into SyncItemListABM and invokes the GenerateItemNumberService BPEL process to generate the new part number and description based on the Number Generation Method and Description Generation Method setup in PIM for that item type (Item Catalog Category) and invokes SyncItemListEbizAdapter to create the new part in PIM. Finally, transforms ItemResponseABM into SyncItemListResponseEBM and routes the response to Agile PLM through ItemResponseEBSV2.  <b>Note:</b> The GenerateItemNumberService composite service uses the oracle/wss_username_token_client_policy client security policy while calling GenerateItemNumberAndDescriptionService hosted through IRep on the Oracle E-Business Suite server. The security credentials for this are stored in the csf-key GINServiceKey on Fusion Middleware (FMW). The Oracle E-Business Suite username and password need to be setup correctly so that the Oracle E-Business Suite service is invoked successfully from the AIA composite in FMW layer.
6	SyncItemListAgileReqABCImpl transforms and then returns the response to SyncItemListAgileReqABCs.	SyncItemListAgileReqABCImpl transforms SyncItemListResponseEBM into AgileSyncItemListResponseABM and returns the same to SyncItemListAgileReqABCs.
7	SyncItemListAgileReqABCs returns AgileSyncItemListResponseABM to NPRAutonumberPX or NPRActionPX.	SyncItemListAgileReqABCs returns AgileSyncItemListResponseABM to NPRAutonumberPX or NPRActionPX.
8	NPRAutonumberPX/ NPRActionPX returns the part number to New Part Creation UI in Agile PLM.	The NPRActionPX/NPR Auto number PX using AgileSyncItemListResponseABM updates the part using Agile SDK. The PX updates all the information passed from Oracle E-Business Suite in case of the Action menu based PX and only the part number in case of Auto Number PX.

## 4.3 Solution Assumptions and Constraints

1. Item catalog category (ICC) is set up with the necessary item number and generation setup in Oracle E-Business Suite.  
  
If the item catalog category is set up with New Item Request (NIR), then the item created will be an engineering item and will need to go through the NIR process in Oracle E-Business Suite
2. Oracle E-Business Suite INV: Default primary unit of measure and INV: Default Item Status profile options must be set up to create the item successfully.
3. The Action menu based PX is designed in such a way that any attribute for the item could be passed in the payload.

In addition, any extra information from Oracle E-Business Suite could be updated on the item apart from Part Number.

4. While Autonumber PX is being created, a unique autonumber is created for every subclass.
5. Dynamic invocation interface (DII) is used in the Autonumber PX for triggering the integration so that no stubs are generated for the Application Business Messages (ABMs) and are packaged in the PX jar; any changes to the payload have minimum impact.

## 4.4 Agile PLM Interfaces

[Table 4-2](#) lists the Agile PLM Web Services Definition Language (WSDL) files:

**Table 4-2 Agile PLM Services Definition Language (WSDL) files**

Interface	Description
SyncItemListAgileReqABCS	
SyncItemListAgileReqABCSImpl	
ItemABS.wsdl	Used to create an item in Oracle E-Business Suite

[Table 4-3](#) lists the Agile PLM XML Schema Definition (XSD) files:

**Table 4-3 Agile PLM XML Schema Definition (XSD) files**

Interface	Description
SyncItemListAgileReqABCS	
SyncItemListAgileReqABCSImpl	
ItemABM.xsd	Contains the Item Request and Response ABM/Application Business Objects (ABOs)
ItemABO.xsd	

## 4.5 Oracle E-Business Suite Interfaces

[Table 4-4](#) lists the Oracle E-Business Suite WSDL files:

**Table 4-4 Oracle E-Business Suite WSDL files**

Interface	Description
SyncItemListEbizProvABCSImpl	
SyncItemListEbizAdapter.wsdl	Used for the OA Adapter "INV_EBI_ITEM_PUB.process_item" pl/sql function call

[Table 4-5](#) lists the Oracle E-Business Suite XSD files:

**Table 4-5 Oracle E-Business Suite XSD files**

Interface	Description
SyncItemListEbizProvABCSImpl	
APPS_INV_EBI_ITEM_PUB_PROCESS_ITEM.xsd	Contains the CreateItem Request and Response ABM

**Table 4–5 (Cont.) Oracle E-Business Suite XSD files**

Interface	Description
GenerateItemNumberABM.xsd	Contains the GenerateItemNumber User Exit Output Type

## 4.6 Core AIA Components

Table 4–6 lists the industry components used in the process integration for NPR:

**Table 4–6 Industry Components for NPR**

Component	Name
Enterprise Business Object (EBO)	ItemEBO
Enterprise Business Message (EBM)	SyncItemListEBM
	SyncItemListResponseEBM
Enterprise Business Service (EBS)	ItemEBSV2
	ItemResponseEBSV2

Table 4–7 lists the core components locations:

**Table 4–7 Core Component Location**

Component	Location
EBO and EBM XSD files	\$AIA_HOME/AIAMetaData/AIAComponents/EnterpriseObjectLibrary/Core/EBO/ \$AIA_HOME/AIAMetaData/AIAComponents/ApplicationObjectLibrary/EBiz/Release1/Core
WSDL files	\$AIA_HOME/apps/AIAMetaData/AIAComponents/EnterpriseBusinessServiceLibrary/Core/EBO/ \$AIA_HOME/AIAMetaData/AIAComponents/ExtensionServiceLibrary/Ebiz \$AIA_HOME/AIAMetaData/AIAComponents/ApplicationConnectorServiceLibrary/Ebiz/V1

For detailed documentation of individual EBOs and EBMs, click the AIA Reference Doc link on EBO and EBM detail pages in Oracle Enterprise Repository.

For more information, see *Oracle Fusion Middleware Developer's Guide for Oracle Application Integration Architecture Foundation Pack 11g Release 1*, "How to Access Oracle AIA Content in Oracle Enterprise Repository."

EBOs can be extended, for instance, to add new data elements. These extensions are protected and will remain intact after a patch or an upgrade.

For more information, see *Oracle Fusion Middleware Concepts and Technologies Guide for Oracle Application Integration Architecture Foundation Pack 11g Release 1*, "Understanding Extensibility."

## 4.6.1 Agile PLM and Oracle E-Business Suite Components

Table 4-8 lists the Agile PLM and Oracle E-Business Suite components:

**Table 4-8 Agile PLM and Oracle E-Business Suite Components**

Services	Agile PLM (Requester)	Oracle E-Business Suite (Provider)
ABMs	AgileSyncItemListABM AgileSyncItemResponseABM	GenerateItemNumberABM APPS_INV_EBI_ITEM_PUB_PROCESS_ITEM
Application Business Connector Service (ABCs)	SyncItemListAgileReqABCS SyncItemListAgileReqABCSImpl	SyncItemListEbizProvABCSImpl

Table 4-9 lists the core components locations:

**Table 4-9 Core Component Locations**

Component	Location
Application Business Objects, ABM, and Common XSD files	\$AIA_HOME/AIAMetaData/AIAComponents/EnterpriseObjectLibrary/Core/EBO/ \$AIA_HOME/AIAMetaData/AIAComponents/ApplicationObjectLibrary/Ebiz/Release1/Core
WSDL files	\$AIA_HOME/apps/AIAMetaData/AIAComponents/EnterpriseBusinessServiceLibrary/Core/EBO/ \$AIA_HOME/AIAMetaData/AIAComponents/ExtensionServiceLibrary/Ebiz \$AIA_HOME/AIAMetaData/AIAComponents/ApplicationConnectorServiceLibrary/Ebiz/V1

## 4.7 Integration Services

The integration services for the NPR process are:

- ItemEBSV2
- SyncItemListAgileReqABCSImpl
- SyncItemListEbizProvABCSImpl

### 4.7.1 ItemEBSV2

ItemEBSV2 exposes the operations related to the item integration on the Item EBO.

The following list itemizes the routing rules:

- ItemEBSV2 service
  - SyncItemList: Routes SyncItemListEBM to SyncItemListEbizProvABCSImpl
- ItemResponseEBSV2 service
  - SyncItemListResponse: Routes SyncItemListResponseEBM to SyncItemListAgileReqABCSImpl

## 4.7.2 SyncItemListAgileReqABCSImpl

SyncItemListAgileReqABCSImpl transforms the Agile PLM message (AgileSyncItemListABM) into SyncItemListEBM, calls the routing service to synchronize the item, and receives the SyncItemListResponseEBM response from Oracle E-Business Suite. It then transforms the SyncItemListResponseEBM response from the routing EBS back to the Agile PLM message (AgileSyncItemListResponseABM) and sends it to SyncItemListAgileReqABCS, which returns it to the calling Agile PLM PX.

The process includes:

1. Receives AgileSyncItemListABM from SyncItemListAgileReqABCS invoke by the Agile PLM Action PX or Autonumber PX.
2. Transforms this message into SyncItemListEBM:
  - Populates the EBM header
  - Determines the target system IDs and adds them in the EBM header for controlling the routing
  - Validates the required fields
  - Maps to the SyncItemListEBM
3. Calls the target ItemEBSV2 service with the operation SyncItemList
4. Transforms the SyncItemList Response Message (from SyncItemListResponseEBM) to an AgileSyncItemListResponseABM Agile PLM message
5. Sends AgileSyncItemListResponseABM back to SyncItemListAgileReqABCS, which in turn sends it back to the respective PX

## 4.7.3 SyncItemListEbizProvABCSImpl

SyncItemListEbizProvABCSImpl receives the SyncItemListEBM message from ItemEBSV2, transforms it into Oracle E-Business Suite specific SyncItemListABM, and calls the Generate Item Number and Description services. Depending on the item catalog category, the item number and its description are generated and returned.

---

**Note:** Generate Item Number and Description service is called only if the syncActionCode value in the EBM is CREATEREPLACE. In the NPR flow, the value of syncActionCode is CREATEREPLACE; however, in the item synchronization flow, where the value of syncActionCode is CREATEUPDATE, the Generate Item Number and Description service is not called.

---

Subsequently, this Sync Item PL/SQL Application Programming Interface (API) is called to synchronize an item in Oracle E-Business Suite. It then transforms Oracle E-Business Suite-specific response message SyncItemList ResponseABM to SyncItemListResponseEBM and calls the routing service ItemResponseEBSV2 from which the response is sent back to Agile PLM.

The process includes:

1. Receives SyncItemListEBM from ItemEBSV2
2. Transforms SyncItemListEBM into Oracle E-Business Suite specific message SyncItemListABM

3. Applies the dynamically generated eXtensible Stylesheet Language (XSL) onto this transformation

This dynamic XSL is generated based on the eXtensible Stylesheet Language Transformation (XSLT) defined at the customer site, which allows mapping of the EBM attributes to the ABM attributes that can be configured at the customer site. To allow this mapping, a template call is made at the end of the Transformation XSL file (the one that transforms the EBM to ABM) and this dynamic XSL is called from the original EBM-To-ABM transformation XSL.

4. Calls the GenerateItemNumberService helper BPEL process if PIM is installed
5. Creates the item in Oracle E-Business Suite with Oracle E-Business Suite Generated Item Number instead of the Agile PLM Generated Item Number
  - Populates the EBM header
  - Determines the Target System IDs and adds them into the EBM header for controlling the routing
  - Validates the required fields
6. If the condition IS\_PIM\_INSTALLED is set to true, it calls the GIN service
7. Invokes the Sync Item API
8. Transforms Oracle E-Business Suite specific message SyncItemListResponseABM into SyncItemListResponseEBM
9. Calls ItemResponseEBSV2 to send response message SyncItemListResponseEBM to SyncItemListAgileReqABCSImpl

---

# Process Integration for Item Synchronization

This chapter provides an overview of the process integration for item synchronization and discusses:

- Item synchronization process integration
- Solution assumptions and constraints
- Agile Product Lifecycle Management (PLM) interfaces
- Oracle E-Business Suite interfaces
- Core Application Integration Architecture (AIA) components
- Integration services

## 5.1 Overview

Agile PLM is the system of record for product design and part information. The Item Synchronization process sends the new part numbers together with the part attributes from Agile PLM to Oracle E-Business Suite. Synchronization of an item from Agile PLM to Oracle E-Business Suite is performed in the following two scenarios:

- A part number is created in Agile PLM and the same part number must be created in Oracle E-Business Suite/PIM.
- A part already exists in Agile PLM and Oracle E-Business Suite/PIM; however, a change is created on the item in Agile PLM.

The information of this item from Agile PLM must be synchronized with the existing item information in Oracle E-Business Suite/PIM.

The process of synchronization of an item can be triggered on-demand by the user. An engineer creating a new part in Agile PLM synchronizes the same with Oracle E-Business Suite/PIM through an action menu based process extension (PX). If the item does not exist in Oracle E-Business Suite/PIM, it will be created, or else updated.

The item synchronization process is almost the same as the New Part Request (NPR) process. However, for item synchronization, a new PX (SyncItem PX) in Agile PLM is used to trigger the publication of a new part into Oracle E-Business Suite/PIM or synchronization of an updated part from Agile PLM into Oracle E-Business Suite/PIM. The part information is replicated in Oracle E-Business Suite/PIM and a transfer status is returned. On the contrary to the item synchronization, if a part was created outside of Agile and Agile does not have the part number, the NPR process involves sending the part number from Oracle E-Business Suite into Agile.

All this is performed in realtime. No approval or any other role is involved in the process.

## 5.2 Item Synchronization Process Integration

The item synchronization process includes:

- For item synchronization, the part number is created first in Agile PLM and then in Oracle E-Business Suite.  
If the part already exists in Oracle E-Business Suite, the part data will be synchronized with Agile PLM's part information.
- An action menu based process extension (syncitemPX) is used to trigger the publication of the part number into Oracle E-Business Suite/PIM or synchronization of an updated part from Agile PLM into Oracle E-Business Suite/PIM.
- The part information is replicated in Oracle E-Business Suite/PIM and a transfer status is returned whether it was successful or not.

### 5.2.1 Exceptions

The following exception conditions create error messages for this integration process:

- The context organization is not passed.
- More than one item master organizations exist and the default master organization configuration property is not setup or is invalid.

### 5.2.2 Item Synchronization Integration Services Orchestration

[Table 5-1](#) lists the activities in item synchronization integration services orchestration:

**Table 5-1 Activities in Item Synchronization Orchestration**

Step	Name	Step Description
1.	Agile PLM SyncItemPX is triggered.	The Agile PLM Sync Item PX is triggered by the Agile PLM user from the Agile PLM Web client as part of New Part creation in Agile PLM.
2.	Invoke SyncItemListAgileReqABCS with AgileSyncItemListABM as input.	The SyncItemPX process invokes SyncItemListAgileReqABCS with AgileSyncItemListABM as input.
3.	Invoke SyncItemListAgileReqABCSImpl with AgileSyncItemListABM as input.	SyncItemListAgileReqABCS invokes SyncItemListAgileReqABCSImpl with AgileSyncItemListABM as input.
4.	SyncItemListAgileReqABCSImpl invokes ItemEBSV2 with the SyncItemList operation.	SyncItemListAgileReqABCSImpl transforms AgileSyncItemListABM into SyncItemListEBM and invokes SyncItemList operation on ItemEBSV2 with SyncItemListEBM as the input. SyncItemListEBM is routed to Oracle E-Business Suite SyncItemListEbizProvABCSImpl.

**Table 5–1 (Cont.) Activities in Item Synchronization Orchestration**

Step	Name	Step Description
5.	SyncItemListEbizProvABCSImpl transforms and then calls the Oracle E-Business Suite service.	SyncItemListEbizProvABCSImpl first transforms SyncItemListEBM into the input of the Oracle E-Business Suite service to create or update the item in Oracle E-Business Suite and then calls that service. SyncItemListEbizProvABCSImpl invokes ItemResponseEBSV2 with SyncItemListResponseEBM as input, which is routed to SyncItemListAgileReqABCSImpl.
6.	SyncItemListAgileReqABCSImpl transforms and then returns the response to SyncItemListAgileReqABCS.	SyncItemListAgileReqABCSImpl transforms SyncItemListResponseEBM into AgileSyncItemListResponseABM and returns the same to SyncItemListAgileReqABCS.
7.	SyncItemListAgileReqABCS returns AgileSyncItemListResponseABM to the SyncItemPX.	SyncItemListAgileReqABCS returns AgileSyncItemListResponseABM to SyncItemPX.
8.	SyncItemPX returns the part number to New Part Creation UI in Agile PLM	SyncItemPX gets a message from AgileSyncItemListResponseABM and displays an appropriate message in UI.

## 5.3 Solution Assumptions and Constraints

1. Part number generation occurs first in Agile PLM and adheres to policies established in Oracle E-Business Suite/PIM.
2. An Action based PX (SyncItem PX) is designed in such a way that any attribute for an item could be passed into the payload along with the site-specific attributes if multisite is enabled in Agile PLM.
3. Dynamic invocation interface (DII) is used in PX for triggering the integration so that no stubs are generated for the Application Business Messages (ABMs) and packaged in the PX jar; any changes to the payload will have minimum impact.
4. Oracle E-Business Suite INV: Default primary unit of measure and INV: Default Item Status profile options must be set up to create the item successfully.
5. The Action menu based PX is designed in such a way that any attribute for the item could be passed in the payload.

## 5.4 Agile PLM Interfaces

Table 5–2 lists the Agile PLM Web Services Definition Language (WSDL) files:

**Table 5–2 Agile PLM Web Services Definition Language (WSDL) files**

Interface	Description
SyncItemListAgileReqABCS	
SyncItemListAgileReqABCSImpl	

**Table 5–2 (Cont.) Agile PLM Web Services Definition Language (WSDL) files**

Interface	Description
ItemABS.wsdl	Used to create an item in Oracle E-Business Suite

Table 5–3 lists the Agile PLM XML Schema Definition (XSD) files:

**Table 5–3 Agile PLM XML Schema Definition (XSD) files**

Interface	Description
SyncItemListAgileReqABCS	
SyncItemListAgileReqABCSImpl	
ItemABM.xsd	Contains the Item Request and Response ABM/ Application Business Objects (ABOs)
ItemABO.xsd	

## 5.5 Oracle E-Business Suite Interfaces

Table 5–4 lists the Oracle E-Business Suite WSDL files:

**Table 5–4 Oracle E-Business Suite WSDL files**

Interface	Description
SyncItemListEbizProvABCSImpl	
SyncItemListEbizAdapter.wsdl	Used for the OA Adapter "INV_EBI_ITEM_PUB.process_item" pl/sql function call

Table 5–5 lists the Oracle E-Business Suite XSD files:

**Table 5–5 Oracle E-Business Suite XSD files**

Interface	Description
SyncItemListEbizProvABCSImpl	
APPS_INV_EBI_ITEM_PUB_PROCESS_ITEM.xsd	Contains the CreateItem Request and Response ABM

## 5.6 Core AIA Components

Table 5–6 lists the industry components used in the process integration for item synchronization:

**Table 5–6 Industry Components for Item Synchronization**

Component	Name
Enterprise Business Object (EBO)	ItemEBO
Enterprise Business Message (EBM)	SyncItemListEBM
	SyncItemListResponseEBM
Enterprise Business Service (EBS)	ItemEBSV2
	ItemResponseEBSV2

Table 5–7 lists the core components locations:

**Table 5–7 Core Component Locations**

Component	Location
EBO and EBM XML Schema Definition (XSD) files	\$AIA_HOME/AIAMetaData/AIAComponents/EnterpriseObjectLibrary/Core/EBO/ \$AIA_HOME/AIAMetaData/AIAComponents/ApplicationObjectLibrary/Ebiz/Release1/Core
WSDL files	\$AIA_HOME/apps/AIAMetaData/AIAComponents/EnterpriseBusinessServiceLibrary/Core/EBO/ \$AIA_HOME/AIAMetaData/AIAComponents/ExtensionServiceLibrary/Ebiz \$AIA_HOME/AIAMetaData/AIAComponents/ApplicationConnectorServiceLibrary/Ebiz/V1

For detailed documentation of individual EBOs and EBMs, click the AIA Reference Doc link on EBO and EBM detail pages in Oracle Enterprise Repository.

For more information, see *Oracle Fusion Middleware Developer's Guide for Oracle Application Integration Architecture Foundation Pack 11g Release 1*, "How to Access Oracle AIA Content in Oracle Enterprise Repository."

EBOs can be extended, for instance, to add new data elements. These extensions are protected, and they will remain intact after a patch or an upgrade.

For more information, see *Oracle Fusion Middleware Concepts and Technologies Guide for Oracle Application Integration Architecture Foundation Pack 11g Release 1*, "Understanding Extensibility."

### 5.6.1 Agile PLM and Oracle E-Business Suite Components for Item Synchronization

Table 5–8 lists the Agile PLM and Oracle E-Business Suite components:

**Table 5–8 Agile PLM and Oracle E-Business Suite Components**

Services	Agile PLM (Requester)	Oracle E-Business Suite (Provider)
ABMs	AgileSyncItemListABM AgileSyncItemListResponseABM	APPS_INV_EBI_ITEM_PUB_PROCESS_ITEM
Application Business Connector Service (ABCS)	SyncItemListAgileReqABCS SyncItemListAgileReqABCSImpl	SyncItemListEbizProvABCSImpl

Table 5–9 lists the core components locations:

**Table 5–9 Core Component Locations**

Component	Location
Application Business Objects, ABM, and Common XSD files	\$AIA_ HOME/AIAMetaData/AIAComponents/ ApplicationObjectLibrary /Agile PLM/V1/schemas
	\$AIA_ HOME/AIAMetaData/AIAComponents/ ApplicationObjectLibrary /Ebiz/V1/schemas
	\$AIA_ HOME/AIAMetaData/AIAComponents/ ApplicationObjectLibrary /Ebiz/Release1/Core
WSDL files	\$AIA_ HOME/AIAMetaData/AIAComponents/ ApplicationObjectLibrary /Agile PLM/V1/wsdl
	\$AIA_ HOME/AIAMetaData/AIAComponents/ ApplicationObjectLibrary /Ebiz/wsdl
	\$AIA_ HOME/AIAMetaData/AIAComponents/ ExtensionServiceLibrary/Ebiz
	\$AIA_ HOME/AIAMetaData/AIAComponents/Ap plicationConnectorServiceLibrary/Ebiz/V1

## 5.7 Integration Services

The integration services for the item synchronization process are:

- ItemEBSV2
- SyncItemListAgileReqABCSImpl
- SyncItemListEbizProvABCSImpl

### 5.7.1 ItemEBSV2

ItemEBSV2 exposes the operations related to the item integration on the item EBO. The following list itemizes the routing rules:

- ItemEBSV2
  - SyncItemList: Routes SyncItemListEBM to SyncItemListEbizProvABCSImpl
- ItemResponseEBSV2
  - SyncItemListResponse: Routes SyncItemListResponseEBM to SyncItemListAgileReqABCSImpl

### 5.7.2 SyncItemListAgileReqABCSImpl

SyncItemListAgileReqABCSImpl transforms the Agile PLM message (AgileSyncItemListABM) into SyncItemListEBM, calls the routing service to synchronize the item, and receives the SyncItemListResponseEBM response from Oracle E-Business Suite. It then transforms the SyncItemListResponseEBM response from the routing EBS back to the Agile PLM message

(AgileSyncItemListResponseABM) and sends it to SyncItemListAgileReqABCS, which returns it to the calling Agile PLM PX.

The process includes:

1. 1. Receives the AgileSyncItemListABM from the SyncItemListAgileReqABCS invoked by the Agile PLM Action PX
2. 2. Transforms this message into SyncItemListEBM:
  - Populates the EBM header
  - Determines the target system IDs and adds them in the EBM header for controlling the routing
  - Validates the required fields
  - Maps to SyncItemListEBM
3. Calls the target ItemEBSV2 service with the operation SyncItemList
4. Transforms the SyncItemList Response message (from SyncItemListResponseEBM) to an AgileSyncItemListResponseABM Agile PLM message
5. Sends AgileSyncItemListResponseABM back to SyncItemListAgileReqABCS, which in turn sends it to the respective PX

### 5.7.3 SyncItemListEbizProvABCSImpl

SyncItemListEbizProvABCSImpl receives the SyncItemListEBM message from ItemEBSV2, transforms it into an Oracle E-Business Suite-specific SyncItemListABM.

---

**Note:** Generate Item Number and Description service is called only if the syncActionCode value in the EBM is CREATEREPLACE. In the NPR flow, the value of syncActionCode is CREATEREPLACE; however, in the item synchronization flow, where the value of syncActionCode is CREATEUPDATE, the Generate Item Number and Description service is not called.

---

Subsequently, the Sync Item PL/SQL Application Programming Interface (API) is called to synchronize an item in Oracle E-Business Suite. It transforms the Oracle E-Business Suite-specific response message SyncItemListResponseABM to SyncItemListResponseEBM and calls the routing service ItemResponseEBSV2 from which the response is sent to Agile PLM.

The process includes:

1. Receives SyncItemListEBM from ItemEBSV2
2. Transforms SyncItemListEBM into Oracle E-Business Suite specific message SyncItemListABM
3. Applies the dynamically generated eXtensible Stylesheet Language (XSL) onto this transformation

This dynamic XSL is generated based on the eXtensible Stylesheet Language Transform (XSLT) defined at the customer site, which allows mapping of the EBM attributes to the ABM attributes that can be configured at the customer site. To allow this mapping, a template call is made at the end of the Transformation XSL file (the one that transforms the EBM to ABM) and this dynamic XSL is called from the original EBM-To-ABM transformation XSL.

4. Creates an item in Oracle E-Business Suite with Oracle E-Business Suite Generated Item Number instead of Agile PLM Generated Item Number
  - Populates the EBM header
  - Determines the target system IDs and adds them in the EBM header for controlling the routing
  - Validates the required fields
5. Invokes the Sync Item API
6. Transforms Oracle E-Business Suite-specific message SyncItemListResponseABM into SyncItemListResponseEBM
7. Calls ItemResponseEBSV2 to send response message SyncItemListResponseEBM to SyncItemListAgileReqABCSImpl

# 6

---

## Process Integration for Change Order Validation

This chapter provides an overview of the process integration for change order validation and discusses:

- Change order validation process integration
- Solution assumptions and constraints
- Agile Product Lifecycle Management (PLM) interfaces
- Oracle E-Business Suite interfaces
- Core Application Integration Architecture (AIA) components
- Integration services

### 6.1 Overview

The process integration for change order validation facilitates validating a change order whether it will be implemented successfully in Oracle E-Business Suite, before the change order is routed for approval in Agile PLM. This process integration is similar to the process integration for change order release. However, the difference is that the change order release process applies only to the changes in the released state of workflow, but the change order validation is applicable to all other workflow status prior to the released state.

This process can be implemented as many times as possible and in any workflow state other than the released state before the change order is released in Agile PLM. The preferred workflow state for change order validation is submitted. After validation, the change order can be re-submitted for validation or can be released to be synchronized with Oracle E-Business Suite.

### 6.2 Change Order Validation Process Integration

This process includes the following steps:

1. In Agile PLM, a change order is created and an aXML file of the change order is generated through an Automated Transfer Order (ATO).

An ATO is a routable object that triggers and tracks automated transfer of product content information from Agile to XML through Agile PLM Content Service (ACS).

2. If the workflow status of this change order is other than *released*, the integration determines that the change order is being submitted for validation.

3. The change order's aXML file is not queued, and is not subject to dependency checks.

However, it appears in the integration Queue Monitor user interface in a separate section called Validate ECO. In this section, only the following information is displayed as read only:

- ECO Number
- aXML file number
- Release Audit Status (Pending Processing, In Process, Failed, Passed, Warning). The Warning status indicates that the audit status process could not be completed because of some error (such as unable to connect to Oracle DB)
- Log file

4. The change orders queued for validations are processed concurrently unlike the change orders queued for synchronization, which are processed sequentially.

If validation of a change order fails, the next change order in the queue is picked up for processing automatically.

5. The integration carries out the process of posting data to Oracle E-Business Suite.

However, after processing the whole change order, it does not commit the data. In an event of a failure, the error messages are sent back to Agile PLM. This is followed by a rollback of the transaction. If the process is successful, the status is updated as Validated in Agile PLM's Transfer Status attribute (change order Agile PLM P2 or P3 defined attribute for the Change.TransferStatusAttribute property).

If the process fails, the status is updated as Validation Failed in Agile PLM's Transfer Status attribute (change order Agile PLM P2 or P3 defined attribute for the Change.TransferStatusAttribute property). In addition, an email notification is sent to the AIAIntegrationAdmin user, which is configured in the Weblogic console under Security Realms.

For more information, see Chapter 10 > Modify Flex Fields > step 6.

6. Errors are logged or displayed in the Queue Monitoring UI and also stored in the database on the middle tier for future reference if needed (Similar to current ECO release processing)

[Figure 6-1](#), [Figure 6-2](#), [Figure 6-3](#), and [Figure 6-4](#) illustrate change order validation integration sequence:

Figure 6–1 Change order validation integration diagram (1 of 4)

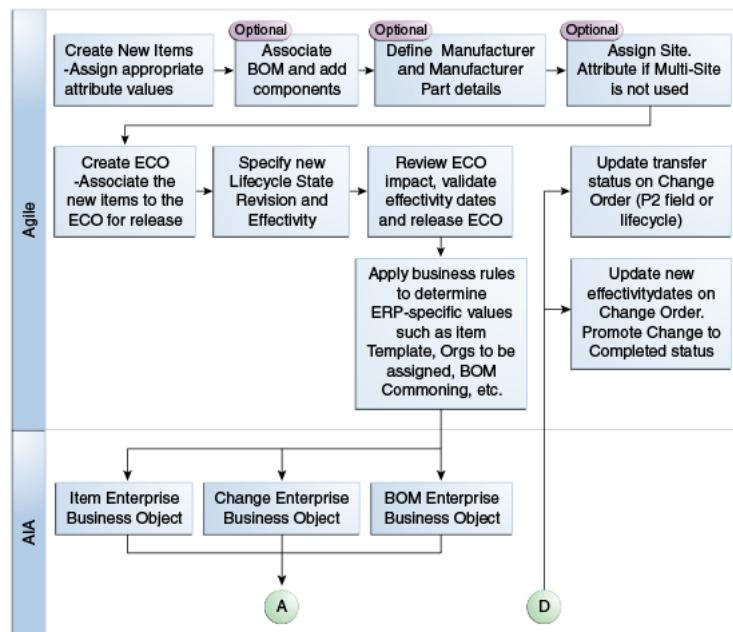


Figure 6–2 Change order validation integration diagram (2 of 4)

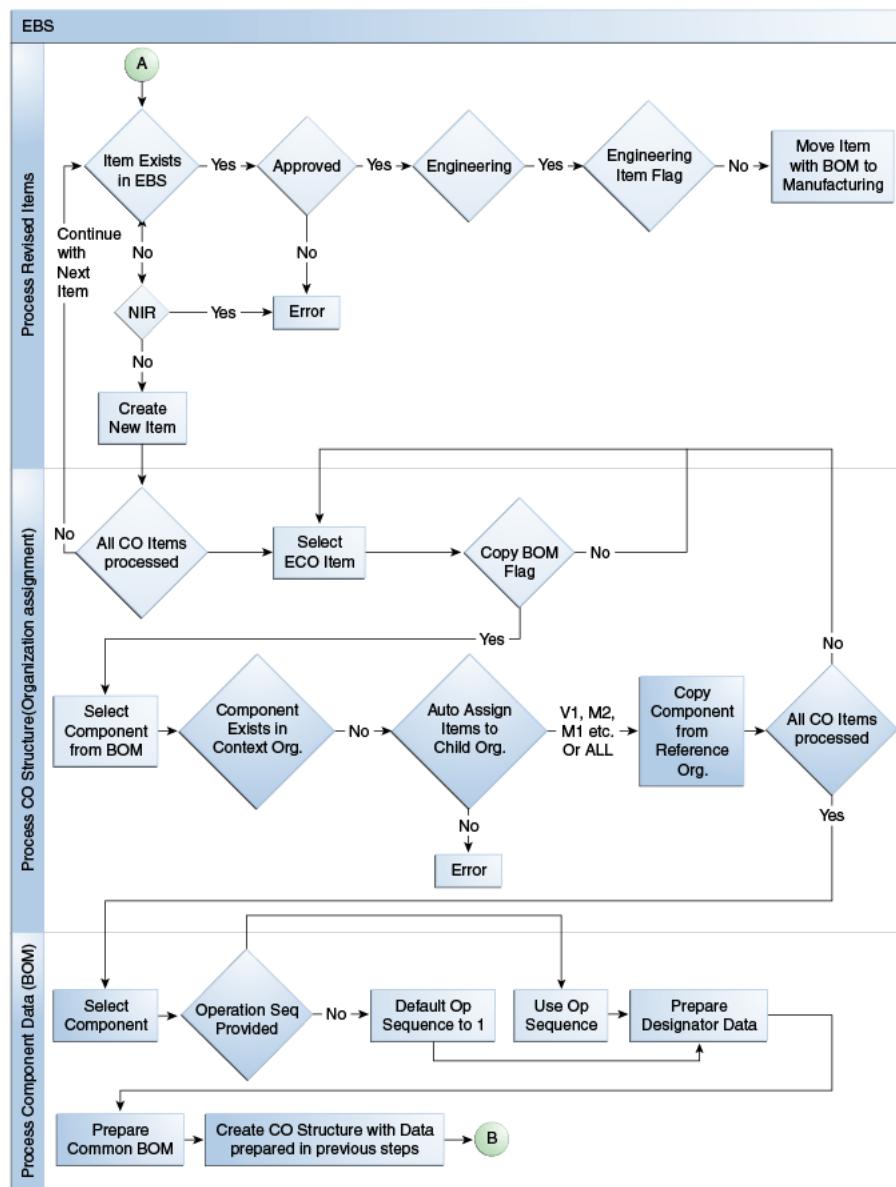


Figure 6-3 Change order validation integration diagram (3 of 4)


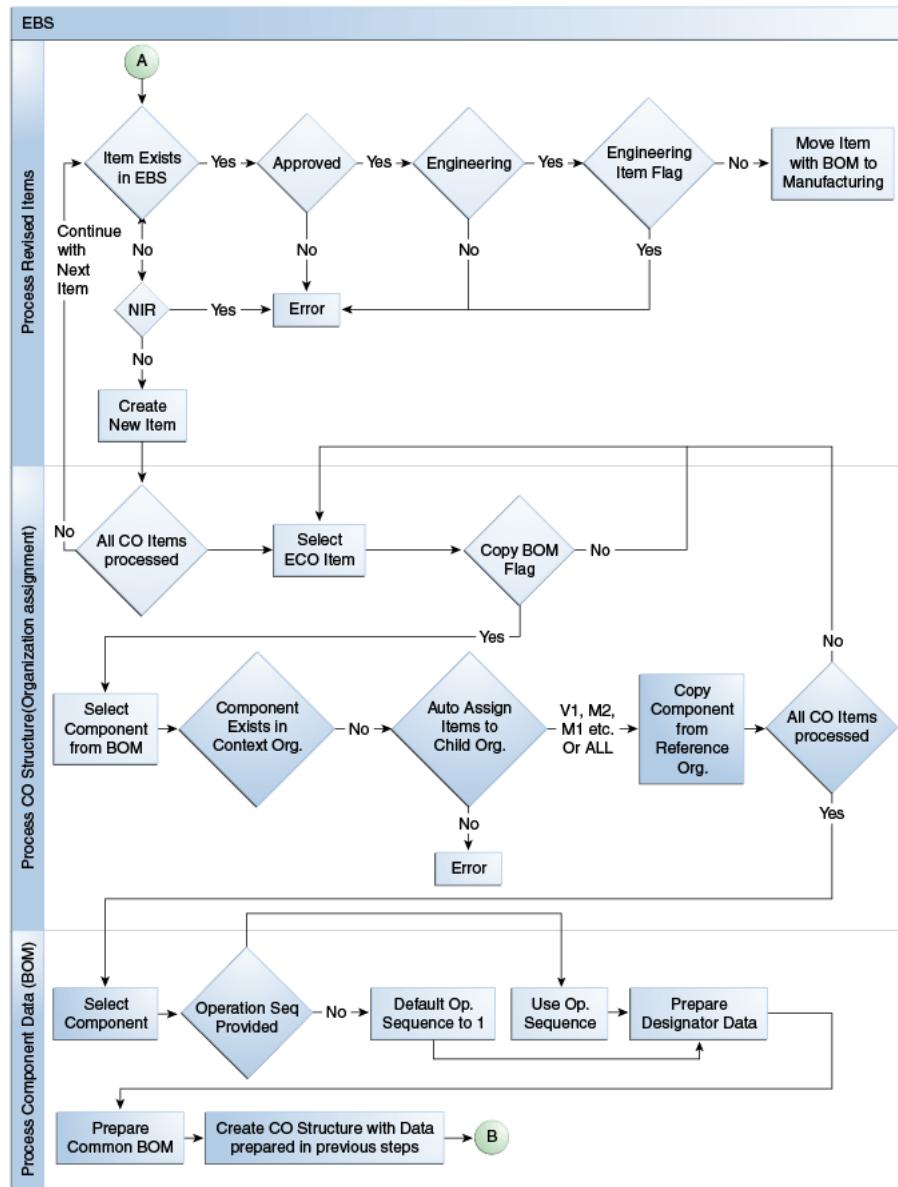


Figure 6-4 Change order validation integration diagram (4 of 4)

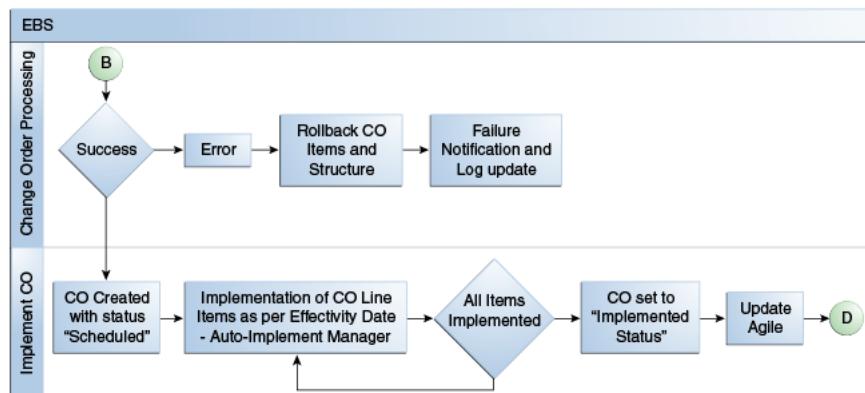

## 6.2.1 Exceptions

The following exception conditions create error messages for this integration process:

- Failure to update the queue status
- Errors raised during the transformations
- Failure to connect to an Oracle DB

## 6.2.2 Change Order Validation Integration Services Orchestration

[Figure 6–5](#) illustrates the change order validation integration services orchestration:

**Figure 6–5 Change order validation integration services orchestration**

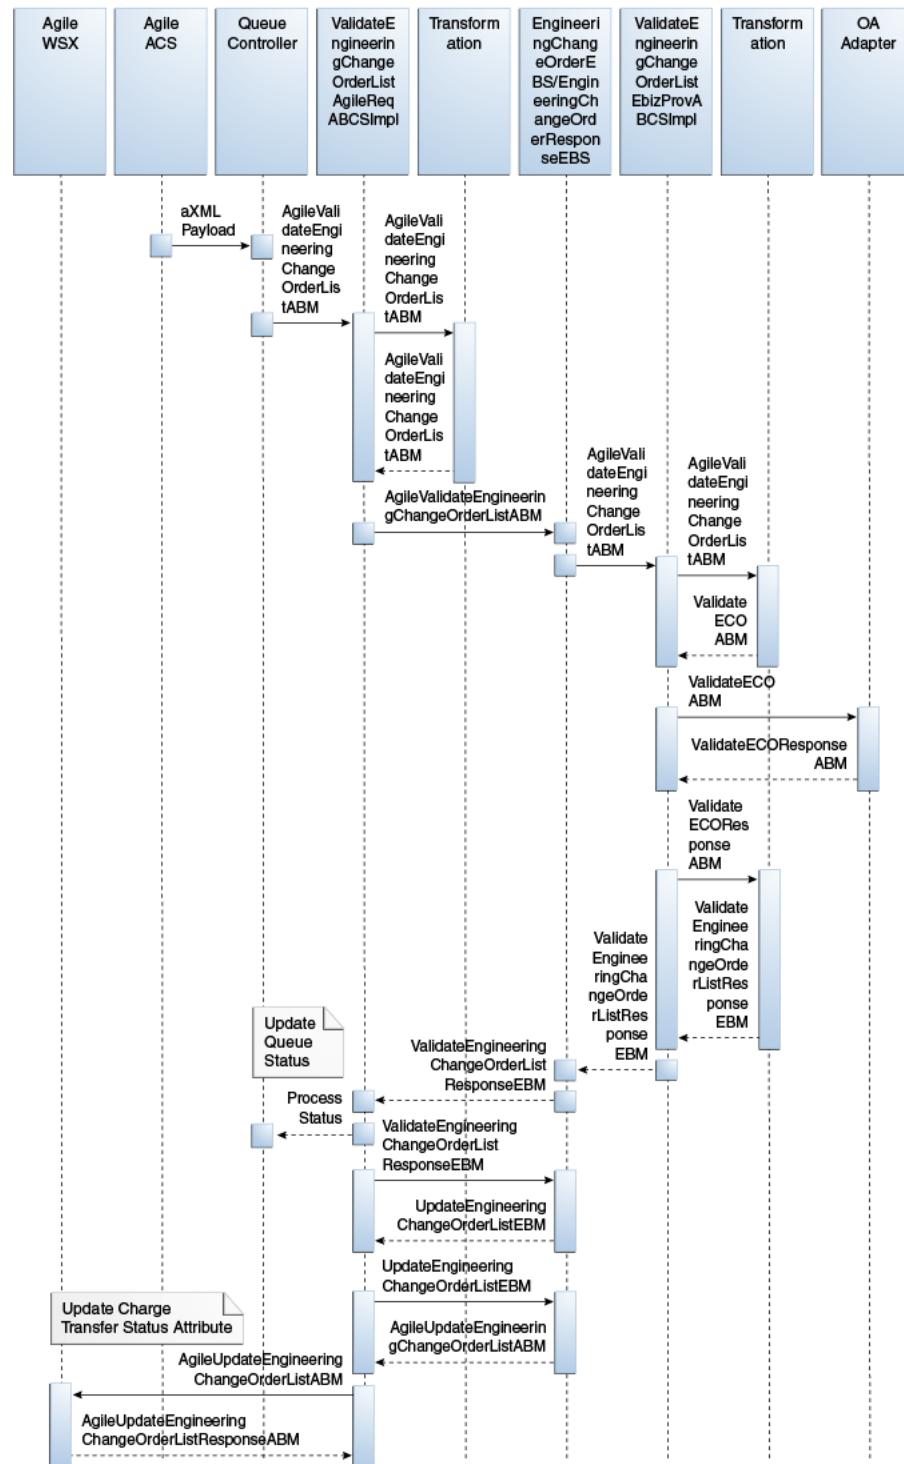


Table 6-1 lists the activities involved in the orchestration:

**Table 6–1 Activities Involved in Orchestration**

Step	Activity	Remarks
1	Agile PLM ACS transmits Agile PLM ECO data in a predefined XML format known as aXML. This file will be queued up for further processing	Agile PLM ACS acts as a trigger for ECO use case.
2	The QueueController Framework reads the highest-priority Queue Message and transforms the payload (aXML) to AgileValidateEngineeringChangeOrderList ABM.	QueueController processes the payload.
3	QueueController invokes ValidateEngineeringChangeOrderListAgile ReqABCSImpl with AgileValidateEngineeringChangeOrderList ABM as input.	
4	AgileValidateEngineeringChangeOrderList ABM is transformed into ValidateEngineeringChangeOrderListEBM.	Enterprise Business Message (EBM) is generated.
5	ValidateEngineeringChangeOrderListAgile ReqABCSImpl invokes ValidateEngineeringChangeOrderList operation on EngineeringChangeOrderEBS with ValidateEngineeringChangeOrderListEBM as input.	
6	EngineeringChangeOrderEBS routes ValidateEngineeringChangeOrderListEBM to ValidateEngineeringChangeOrderListEbiz ProvABCSImpl.	
7	ValidateEngineeringChangeOrderListEbiz ProvABCSImpl transforms ValidateEngineeringChangeOrderListEBM into the input of Oracle E-Business Suite Service and calls that service.	The Application Business Connector Service (ABCS) validates the ECO creation by creating the ECO, related items, and Bill of Material (BOM) in Oracle E-Business Suite to check for any errors.  In the event of failure, the error messages are sent to Agile PLM.  In the event of either Success or Failure, the transaction is rolled back.
8	ValidateEngineeringChangeOrderListEbiz ProvABCSImpl invokes ValidateEngineeringChangeOrderListResp onse operation on EngineeringChangeOrderResponseEBS with ValidateEngineeringChangeOrderListResp onseEBM as input.	
9	EngineeringChangeOrderResponseEBS routes ValidateEngineeringChangeOrderListResp onseEBM to ValidateEngineeringChangeOrderListAgile ReqABCSImpl.	Response message routing.

**Table 6-1 (Cont.) Activities Involved in Orchestration**

Step	Activity	Remarks
10	ValidateEngineeringChangeOrderListAgile ReqABCImpl sends the status to the Queue Controller to update the queue.	This status is updated against the Queue message in the database by the QueueController
11	ValidateEngineeringChangeOrderListAgile ReqABCImpl transforms ValidateEngineeringChangeOrderListResponseEBC into AgileValidateEngineeringChangeOrderList ResponseABM.  AgileValidateEngineeringChangeOrderList ResponseABM is sent as an input to the Agile PLM Web service.  AgileValidateEngineeringChangeOrderList ResponseABM is sent to ValidateEngineeringChangeOrderListAgile ReqABCImpl.	The Web services update the transfer status on the change order in Agile PLM, which will be predefined P2 or P3 attributes on ECO object in Agile PLM.  In case of failure, the notification email will be sent to the email ID of the user mentioned for the NotifyPerson property in AIAConfigurationProperties.xml file.  <b>Note:</b> The ValidateEngineeringChangeOrderListAgileReqABCImpl composite uses the oracle/wss_http_token_client_policy client security policy while calling the ChangeABS service hosted on the Agile server. The security credentials for this are stored in the csf-key AgileWebServicesKey on Fusion Middleware (FMW). The Agile username and password need to be setup correctly so that the Agile service is invoked successfully from the AIA composite in the FMW layer.

### 6.3 Solution Assumptions and Constraints

- If the customer uses Agile PLM multisites, the administrator can assign organization names to sites to indicate the destination Oracle E-Business organization that is set for an item.
- ATOs will be used to carry the data across.
- The change order validation process can be initiated as many times as per need.
- The change order validation processes will not be managed through queuing currently in use for the ECO release processing.  
It will be displayed in the Queue Monitoring UI in a different tab named validate ECO.
- The change order validate processes are processed concurrently unlike the ECO Release processes, which are processed sequentially.

### 6.4 Agile PLM Interfaces

Table 6-2 lists the Agile PLM Web Services Definition Language (WSDL) files:

**Table 6–2 Agile PLM Web Services Definition Language (WSDL) files**

Interface	Description
ValidateEngineeringChangeOrderListAgileReqABCSImpl	
ChangeABS.wsdl	Used to validate an EngineeringChangeOrder in Oracle E-Business Suite

Table 6–3 lists the Agile PLM XML Schema Definition (XSD) files:

**Table 6–3 Agile PLM XML Schema Definition (XSD) files**

Interface	Description
ValidateEngineeringChangeOrderAgileListReqABCSImpl	
EngineeringChangeOrderABM.xsd	Contains AgileValidateEngineeringChangeOrderListABM and AgileValidateEngineeringChangeOrderListResponseABM
EngineeringChangeOrderABO.xsd	

## 6.5 Oracle E-Business Suite Interfaces

Table 6–4 lists the Oracle E-Business Suite WSDL files:

**Table 6–4 Oracle E-Business Suite WSDL files**

Interface	Description
ValidateEngineeringChangeOrderListEbizProvABCSImpl	
ValidateEngineeringChangeOrderListEbizAdapter.wsdl	Used for the OA adapter INV_EBL_CHANGE_ORDER_PUB/VALIDATE_CHANGE_ORDER_LIST PL/SQL function call

Table 6–5 lists the Oracle E-Business Suite XSD files:

**Table 6–5 Oracle E-Business Suite XSD files**

Interface	Description
ValidateEngineeringChangeOrderListEbizProvABCSImpl	
APPS_INV_EBI_CHANGE_ORDER_PUB_VALIDATE_CHANGE_ORDER_LIST.xsd	Defines the input and output ABM of the PL/SQL API call The package used is INV_EBI_CHANGE_ORDER_PUB/VALIDATE_CHANGE_ORDER_LIST API call.

## 6.6 Core AIA Components

Table 6–6 lists the industry components used in validate integration ECO and Part/Product Release (PREL):

**Table 6–6 Industry components used in validate integration ECO and PREL**

Component	Name
Enterprise Business Objects (EBOs)	EngineeringChangeOrderEBO

**Table 6–6 (Cont.) Industry components used in validate integration ECO and PREL**

Component	Name
EBMs	ValidateEngineeringChangeOrderListEBM ValidateEngineeringChangeOrderListResponseEBM
Enterprise Business Service (EBS)	EngineeringChangeOrderEBS EngineeringChangeOrderResponseEBS

Table 6–7 lists the core components locations:

**Table 6–7 Core components locations**

Component	Location
EBO and EBM XSD files	\$AIA_HOME/AIAMetaData/AIAComponents/EnterpriseObjectLibrary/Core/EBO/ \$AIA_HOME/AIAMetaData/AIAComponents/ApplicationObjectLibrary/Ebiz/Release1/Core
WSDL files	\$AIA_HOME/AIAMetaData/AIAComponents/EnterpriseBusinessServiceLibrary/Core/EBO/ \$AIA_HOME/AIAMetaData/AIAComponents/ExtensionServiceLibrary/Ebiz \$AIA_HOME/AIAMetaData/AIAComponents/ApplicationConnectorServiceLibrary/Ebiz/V1

For detailed documentation of individual EBOs and EBMs, click the AIA Reference Doc link on EBO and EBM detail pages in Oracle Enterprise Repository.

For more information about using the Oracle Enterprise Repository and configuring it to provide the AIA Reference Doc link, see *Oracle Fusion Middleware Developer's Guide for Oracle Application Integration Architecture Foundation Pack 11g Release 1*, "Configuring and Using Oracle Enterprise Repository as the Oracle AIA SOA Repository."

EBOs can be extended, for instance, to add new data elements. These extensions are protected and will remain intact after a patch or an upgrade.

For more information, see *Oracle Fusion Middleware Concepts and Technologies Guide for Oracle Application Integration Architecture Foundation Pack 11g Release 1*, "Understanding Extensibility."

### 6.6.1 Agile PLM and Oracle E-Business Suite Components for Change Order Validation

Table 6–8 Agile PLM and Oracle E-Business Suite components for change order validation:

**Table 6–8 Agile PLM and Oracle E-Business Suite components**

Services	Agile PLM (Requester)	Oracle E-Business Suite (Provider)
Application Business Message (ABM)	AgileValidateEngineeringChangeOrderListABM AgileValidateEngineeringChangeOrderListResponseABM	ValidateECOABM ValidateECOResponseABM

**Table 6–8 (Cont.) Agile PLM and Oracle E-Business Suite components**

Services	Agile PLM (Requester)	Oracle E-Business Suite (Provider)
Application Business Connector Service (ABCS)	ValidateEngineeringChangeOrder ListAgileReqABCSImpl	ValidateEngineeringChangeOrder ListEbizProvABCSImpl
Business Process Execution Language (BPEL)	CreateQueueService QueueProcessorServiceImpl	---
Adapter service	ACSAXMLJMSConsumer CreateQueueControlService QueueProcessorService EngineeringChangeOrderService	ValidateEngineeringChangeOrder ListEbizAdapter

Table 6–9 lists the core components locations:

**Table 6–9 Core components locations**

Component	Location
Application Business Objects, ABM, and Common XSD files	\$AIA_HOME/AIA_MetaData/AIAComponents/ ApplicationObjectLibrary/Agile PLM/V1/schemas  \$AIA_HOME/AIA_MetaData/AIAComponents/ ApplicationObjectLibrary/Ebiz/V1/schemas  \$AIA_HOME/AIA_MetaData/AIAComponents/ ApplicationObjectLibrary/Ebiz/Release1/Core
WSDL files	\$AIA_HOME/AIA_MetaData/AIAComponents/ ApplicationObjectLibrary/Agile PLM/V1/wsdl  \$AIA_HOME/AIA_MetaData/AIAComponents/ ApplicationObjectLibrary/Ebiz/wsdl  \$AIA_HOME/AIA_MetaData/AIAComponents/ ExtensionServiceLibrary/Ebiz  \$AIA_HOME/AIA_MetaData/AIAComponents/ApplicationConnectorServiceLibrary/Ebiz/V1

## 6.7 Integration Services

The process integration for change order validation consists of the following services:

- EngineeringChangeOrderEBS
- ValidateEngineeringChangeOrderListAgileReqABCSImpl
- ValidateEngineeringChangeOrderListEbizProvABCSImpl

### 6.7.1 EngineeringChangeOrderEBS

EngineeringChangeOrderEBS exposes the operations related to the validate ECO and ECO integration on the EngineeringChangeOrder EBO.

The following list itemizes the routing rules:

- EngineeringChangeOrderEBS

- ValidateEngineeringChangeOrderList: Routes  
ValidateEngineeringChangeOrderListEBM to  
ValidateEngineeringChangeOrderListEbizProvABCSImpl
- EngineeringChangeOrderResponseEBS  
ValidateEngineeringChangeOrderListResponse: Routes  
ValidateEngineeringChangeOrderListResponseEBM to  
ValidateEngineeringChangeOrderListAgileReqABCSImpl

### 6.7.2 ValidateEngineeringChangeOrderListAgileReqABCSImpl

This service is implemented as an asynchronous BPEL process.

ValidateEngineeringChangeOrderListAgileReqABCSImpl is used for transforming the AgileValidateEngineeringChangeOrderListABM into the ValidateEngineeringChangeOrderListEBM. This service invokes the ValidateEngineeringChangeOrderList operation on the EngineeringChangeOrderEBS with the ValidateEngineeringChangeOrderListEBM as input for the validation of an ECO in Oracle E-Business Suite.

The ValidateEngineeringChangeOrderListResponseEBM is received from the EngineeringChangeOrderEBS and, based on the status of the ECO validation in Oracle E-Business Suite; the QueueController is invoked to update the status of the queue message. In addition, the transfer status attribute in the change order is updated by this service.

1. The QueueController creates the AgileValidateEngineeringChangeOrderListABM and invokes the ValidateEngineeringChangeOrderListAgileReqABCSImpl.
2. The ValidateEngineeringChangeOrderListAgileReqABCSImpl transforms the ValidateEngineeringChangeOrderListResponseEBM into the AgileValidateEngineeringChangeOrderListResponseABM, which is sent as an input to the Agile PLM Web service.
3. The ECO validation status is updated and sent back to Agile PLM. AgileValidateEngineeringChangeOrderListResponseABM is sent back to the ValidateEngineeringChangeOrderListAgileReqABCSImpl.

### 6.7.3 ValidateEngineeringChangeOrderListEbizProvABCSImpl

This service is implemented as an asynchronous BPEL process.

This is a single operation service. This accepts an ECO containing item and a BOM information message as a request and returns a response.

In the Agile PLM to Oracle E-Business Suite flow, ValidateEngineeringChangeOrderListEbizProvABCSImpl is used for transforming ValidateEngineeringChangeOrderListEBM into ValidateECOABM, which invokes the ValidateEngineeringChangeOrderList operation in Oracle E-Business Suite.

In the return flow, the EBS adapter service sends ValidateECOResponseABM, which is transformed by ValidateEngineeringChangeOrderListEbizProvABCSImpl into ValidateEngineeringChangeOrderListResponseEBM.



---

# Process Integration for Change Order Release

This chapter provides an overview of the process integration for change order release and discusses:

- Change order release process integration
- Solution assumptions and constraints
- Agile Product Lifecycle Management (PLM) interfaces
- Oracle E-Business Suite interfaces
- Core Application Integration Architecture (AIA) components
- Integration services

## 7.1 Overview

When the engineers are done authoring a part's attributes and design information and are ready to publish it to the manufacturing system, they release the part on an Engineering Change Order (ECO) or Manufacturing Change Order (MCO). In addition, during the design phase, an assembly can go through multiple design changes, which are revision-controlled by means of ECOs. A design change may be accompanied by a change in specifications, which can be attached as files to the item object.

Within Agile PLM, the change release process used for releasing new parts and part updates (Revision, Manufacturer, and Site changes) uses three types of change orders:

- ECO: used for releasing changes to design, attributes, and Bill of Materials (BOM).  
The ECO release results in the creation of a new revision for the item.
- MCO: used for releasing changes to manufacturer, manufacturer parts and related attributes (Approved Manufacturer List information).  
The MCO does not result in a change of Revision.
- Site change order (SCO): used for releasing changes to site and site-specific AML information.  
SCO does not result in a change of revision and life cycle phase. SCO is applicable only to a customer environment that has implemented Multi-Site.

These change order information should be synchronized with Oracle E-Business Suite so that the processes controlled by Oracle E-Business Suite such as manufacturing planning, costing, procurement, and so on can reflect the latest design of the assembly.


The release of a change order in Agile PLM generally acts as a trigger for the synchronization of product design information with the ERP system; in this case, it is Oracle E-Business. Because Agile PLM is the system of record for product design data, the synchronization process involves the transfer of the released revision of the product design from Agile PLM to the manufacturing system. This information is moved forward from Agile PLM, triggered by an event tied to the change in status of a change order object. The information is then parsed in an integration object format and sent to Oracle E-Business Suite for implementation. A confirmation of its implementation status is sent to Agile PLM.

In general, the ECO process:

- Creates new items in Oracle E-Business Suite/PIM
- Creates an ECO in Oracle E-Business Suite
- Associates a list of revised items with new revisions and effectivity dates, and schedules the ECO for implementation
- Creates a new BOM
- Updates the transfer status in Agile PLM

Figure 7-1 illustrates change order release process flow:

**Figure 7-1 Change order release process flow diagram**

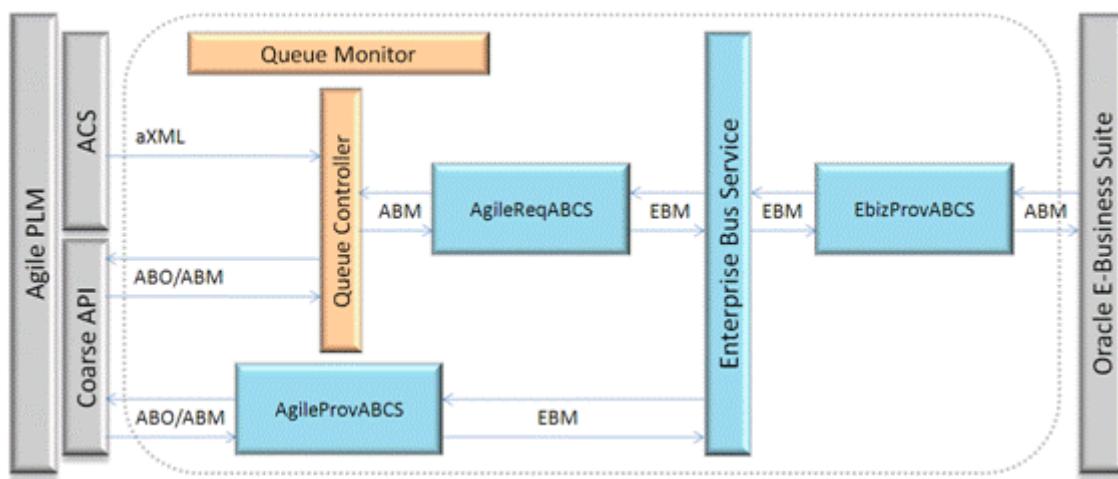

## 7.2 Change Order Release Process Integration

The change order release process from Agile PLM to Oracle E-Business includes:

1. Releasing a change order in Agile PLM
2. Generating of an aXML by Agile PLM Content Server (ACS)
3. Parsing and transformation of aXML Data
4. Posting change order data to Oracle E-Business Suite
5. Communicating order processing status to Agile PLM

## 7.2.1 Releasing a Change Order in Agile PLM

When a change analyst approves the change order in Agile PLM, it is marked as released. This status makes all the changes specified in the change order take effect in Agile PLM. In addition, an optional additional status of complete or implemented exists that indicates the completion of all partner communications, material dispositions, and other actions related to the change order.

Before the release of a change order, it is subjected to prevalidation before its approval stage. This involves validation of certain business rules to ascertain that the flow of change order from Agile PLM to Oracle E-Business Suite would meet all the conditions set in the destination system.

## 7.2.2 Generating an aXML by ACS

ACS generates an aXML (Agile PLM XML) file based on the change order data. Per the filters configured in the ACS, this file contains the information of items, BOM, manufacturers, and the change order itself.

For the purpose of the Agile PLM to Oracle E-Business Suite integration process, ACS is configured to ensure that:

1. The aXML file is configured to carry the following elements from a change order:
  - Change Order Data: Cover Page, Page Two, Page Three, and Affected Items tab attributes
  - Revised Item Data: Title Block, Page Two, Page Three, and Sites tab
  - BOM Data: BOM tab of Items (including reference designators) with delta BOMs only for the revision on Change Order
  - AML Data: AML tab of Items with delta Approved Manufacturer Lists only

---

**Note:** The assumption is that the manufacturer already exists in Oracle E-Business Suite.

---

2. Upon release of a change order, the aXML file goes to a Java Message Service (JMS) queue or a file folder.

## 7.2.3 Parsing and Transformation of aXML Data

The data contained in an aXML file generated by Agile PLM is not in the format that is understood by Enterprise Business Objects (EBO). Hence, this data has to be parsed and transformed.

The parsing and transformation of aXML data entails:

1. Segregation of business objects
2. Sequencing and queuing of change orders
3. Translating Agile PLM site-specific objects into Oracle E-Business Suite's organization-specific objects
4. Translating Agile PLM change order types into Oracle E-Business Suite's change order type
5. Mapping Agile PLM change order attributes to corresponding attributes in Oracle E-Business Suite

6. Ascertaining item existence in Oracle E-Business Suite
7. Defining user exit points for custom transformations

### Segregation of Business Objects

The aXML file contains collective information about the business objects-change order, item attributes, revised item lines, BOM redlines, reference designators, and so on.

This information is broken down into individual components and mapped, one to one, with corresponding EBOs, that is, item, change order, and structure.

Agile ACS output is configured so that only BOM delta changes (redline information) are captured in the output aXML file. The supported types of BOM redline are:

- Addition of a new component to the BOM
- Removal of an existing component from the BOM
- Replacement of an existing component by another on the BOM
- Modification of one or more attributes pertaining to a component on BOM. This includes, but is not limited to the component Find Number (or sequence number on the BOM), component quantity and reference designators

The Oracle E-Business ABCS layer captures these changes and replicates them on the corresponding BOM structures in the system. To maintain referential integrity, the change number is associated with each business individual object. In order to identify the component row being modified, the Agile PLM should not allow the same component item being present multiple times with either same or with different item sequence numbers in a given BOM.

This condition is driven by the following constraints in Oracle E-Business Suite and Agile PLM:

- Oracle E-Business BOM does not allow duplicate components with same operation sequence irrespective of whether same or different item sequence number for the same component item in a given context organization.
- Agile does not provide ability to capture operation sequence for each BOM component row and validating the component item and operation sequence combination uniqueness and then send it to Oracle E-Business Suite through the integration.

---

**Note:** In Agile PLM, ensure that the same item is not contained multiple times in a given BOM. Also, ensure that the same find number is not assigned to more than one item in a given BOM.

---

### Sequencing and Queuing of Change Orders

The change order release process begins with queuing of the change order number in the process queue controller, which sequences the change orders for transfer of parsed data to Oracle E-Business Suite. After the data is processed by Oracle E-Business Suite and its implementation status received, the change order is removed from the process queue.

### Translating Agile PLM Site-specific objects into Oracle E-Business Suite's Organization-specific Objects

The data coming from Agile PLM is split into individual Oracle E-Business Suite organization-specific business objects. This is because the data in Agile PLM can be:

- Centralized: all design locations share the same product design information.

In the case of an Agile PLM environment with no multi sites, the list of organizations assigning an item mapping is derived from a P2/P3 attribute using a simple or complex transformation based on the customers' environment. The attribute values are typically common for all sites. In addition, the same template is typically used for creating an item in each organization.

- Decentralized: the site-specific item attributes, change control, and so on are implemented to multiple sites.

The data in Oracle E-Business Suite, however, is segregated by organizations.

In the case of multi-sites, the list of organizations to which an item needs to be assigned is derived from the item's site assignment. An item's site assignment in Agile is mapped to one or more E-Business organizations. In addition, some of the mapped attributes (including item templates) can have different values for the different sites and the change order lines can have site-specific effectiveness dates although the revisions numbers across the sites remain same.

It is possible to configure the integration to control the transfer of BOM only to specific organizations. In such a case, other mapped organizations would only receive item information. This capability can be used based on customer requirements.

Site -specific AML is not supported for the Agile PLM to Oracle E-Business Suite integration. This is because though Agile PLM allows AML data to be different for different sites, Oracle E-Business Suite associates the AML data at item's master organization level only.

### Translating Agile PLM Change Order Types into Oracle E-Business Suite's Change Order Type

In Agile PLM, a change order is categorized into one of the following change types:

- ECO
- MCO
- SCO

These categories are called as classes in Agile PLM. A class may have one or more sub-classes.

Oracle E-Business Suite does not have a separate category for each change type, and hence, these cannot be differentiated. Hence, when these change types are parsed and processed in Agile PLM, they are translated in Oracle E-Business Suite with the following functionalities:

**Table 7-1 Oracle E-Business Suite Translated Functionalities**

Feature	ECO	MCO	SCO
Customer adoption	All installations	All installations	Only when multi-site is enabled
New revisions for revised items	Mandatory	Not supported	Not supported
Tables redlined	BOMs and Approved Manufacturer List (AML); Global as well as site-specific	AML only; Global as well as site-specific	Site-specific BOMs and AML only

**Table 7-1 (Cont.) Oracle E-Business Suite Translated Functionalities**

Feature	ECO	MCO	SCO
Effectivity Date	At line level; Global when multisite is not enabled; Separate for each site when multisite is enabled	Not specified on change order	At line levels; site-specific only
Other line-level attributes	Global when multisite is not enabled; Separate for each site when multisite is enabled	Global when multisite is not enabled; Separate for each site when multisite is enabled	Site-specific only
New Item Release	Supported	Supported	Only item updates are supported

### Ascertaining Item Existence in Oracle E-Business Suite

When an introductory revision of an item is released for the first time in Agile PLM (which can be done on an ECO or MCO but not on an SCO), the assumption is that the item has been authored in Agile PLM and does not exist in Oracle E-Business Suite. In such cases, the item must be created using template(s) in Oracle E-Business Suite.

An item is created in the Master Org of Oracle E-Business Suite in two ways:

1. Agile PLM releases new part introduction information to Oracle E-Business Suite through a change order, as a first time release.
2. The item information is loaded in Oracle E-Business Suite by an external system other than Oracle E-Business Suite and Agile PLM.

If the Item already exists in the Master Org, and Agile PLM releases a change order to create the same item, the system ends due to error. Because Agile PLM does not explicitly send information about first time, or subsequent releases of an item, a lookup table is employed to ascertain the existence of the item in Oracle E-Business Suite.

This lookup table maintains unique identifiers for the items received from Agile PLM and corresponding items created in Oracle E-Business Suite. It also maintains the unique identifiers for the items created in Oracle E-Business Suite by an external application. These unique identifiers help in ascertaining the existence of an item in Oracle E-Business Suite, thus eliminating any duplication errors.

Any subsequent release of the item from Agile PLM should be sent as an update transaction, and should be expected that the item already exists in the master organization. In this case, however, if the item does not exist, the process will create the item in Oracle E-Business Suite.

### Defining User Exit Points for Custom Transformations

User exits have been provided in the integration to allow custom transformations or filtration routines that a customer may want to add in the process without affecting the main integration flow.

## 7.2.4 Posting Change Order Data to Oracle E-Business Suite

The processing of change order data into the Oracle E-Business Suite system is the foundation of this integration. As part of this step, the following activities are performed:

### 1. Item Master Synchronization:

For all the items sent to Oracle E-Business Suite, the system verifies whether the items already exist and have the same revision number as the old item from Agile PLM. If the item does not exist in Oracle E-Business Suite and it is being released for the first time from Agile PLM, it is created in Oracle E-Business Suite. If the item already exists in Oracle E-Business Suite and the two systems are coordinated to item revision, the existing item is updated with new attribute data from Agile PLM.

If the two systems are not in sync with regards to the earlier revision of the revised item (that is, per the data from Agile PLM, the old revision of the item does not match the current revision of the item in Oracle E-Business Suite), an error occurs.

Alternately, the integration may also be configured to ignore the matching of earlier revisions. If the item does not exist in Oracle E-Business Suite, it is created only in Oracle E-Business Suite. If the item already exists in Oracle E-Business Suite, it is updated and the incoming transaction type from Agile PLM is updated.

### 2. Item Organization Assignment:

Items are assigned to organizations. Sites and organizations assigned on the P2 Multilist01 field in the item and Default Master Org are considered in the following order:

- Sites (highest priority)
- P2 Multilist
- Default master Org (lowest priority)
- Site or Organizations should be assigned at the beginning of the first-time release of an item
- If the sites or organizations need to be added to the items in subsequent releases of an Item, the redlining of BOM or AML and the organization extension cannot be done at the same time because only the delta changes are done. Hence, the item may not be created correctly in the extended organizations.
- If the organization extension must be done at the subsequent release of an item with more complicated use cases, the COPY BOM or COMMON BOM customization can be used or designed to support the use cases.

---

**Note:** Affected items need to be provided with the lifecycle status. The lifecycle status is used to determine the first time or the subsequent release of an item.

---

### 3. AML Update:

New, approved manufacturer-list information from Agile PLM replaces the existing item AML. AML information is supported at the master item level only in Oracle E-Business Suite.

Site-specific AML is not supported for the Agile to Oracle E-Business integration. This is because though Agile allows AML data to be different for different sites, Oracle E-Business associates the AML data at item's master organization level only.

**4. BOM Update (including reference designator):**

The XML data from Agile PLM contains only the changes made to BOMs and not the complete BOM. As a result, BOM data must be coordinated between Agile PLM and Oracle E-Business Suite for the older revision in order for the new revision of BOM data to be posted successfully.

**5. Create Change Order**

The actual change order is created as an object in Oracle E-Business Suite. At the end of the post, the change order is set to a status of "scheduled" for implementation by the Oracle's Auto-Implement Manager. The Auto-Implement Manager implements the change order's lines when their scheduled Effectivity Date arrives. The complete change order is moved to the implemented status when all the lines are successfully implemented.

**6. Oracle E-Business Suite profile option ENG: Require Revised Item New Revision**

It should be set to No.

When a SCO or MCO is released from Agile PLM, the revision of the affected item is not changed. In Oracle E-Business Suite, if a change order exists for the item for that particular revision, this SCO or MCO case ends due to error. To avoid this scenario, new\_revised\_item\_revision field is set to NULL. As a result, in the Oracle E-Business Suite user interface for the revised items, the revision field will be blank.

**7. Implement Initial Item Revision Setup**

If an item is created in an Oracle E-Business Suite organization as part of the create change order processing, then the initial item revision created based on the Oracle E-Business Suite organization level setup for the item will not have the change order reference information displayed from that item revision detail.

The initial item revision will have sysdate as the effective date. If customers want to see the change order reference information from the item revision detail while transferring an item for the first time to the Oracle E-Business Suite organization, then as part of the create change order process, along with the revision effective date, they should provide the item revision code. The item revision code should be higher in terms of ASCII value compared to the initial item revision setup at the Oracle E-Business Suite organization. Customers need to plan and implement the initial item revision setup at the Oracle E-Business Suite organization accordingly.

A large number of business rule validations are done by the Oracle E-Business Suite APIs as part of posting the change order data in Oracle E-Business Suite, especially when item and BOM data is created.

Some of the actions involved (such as item creation, BOM update, and so on) may involve different ways of handling exceptions from implementation to customer.

For example, if a component is being added to a BOM in a given Oracle E-Business Suite organization and it does not exist as an item in Oracle E-Business Suite, two types of actions can be set:

- Stop the BOM processing if an item does not exist in Oracle E-Business Suite.

However, if the item exists in Master Org and the context Org is the Child Org, then it is configurable.

- Create the component using information fed by Agile PLM (or if it already exists in the master Org in Oracle E-Business Suite, extend it to the child Org), and resume processing of the BOM.

However, if a workflow is associated for the change order Type, then the incoming ECO is created in the initial stage itself.

Different customers may have different preferences on which action to perform. The choice of such actions is therefore exposed to the integration administrator using configurable parameters.

### 7.2.5 Communicating Change Order Implementation Status to Agile PLM

When the process of posting change order data into Oracle E-Business Suite finishes (successfully or with errors), change order processing status is sent to Agile PLM.

On receiving the status from Oracle E-Business Suite, an Agile PLM change order update process is initiated with the change order number, and a value of Errorred or Transferred is passed to the Agile PLM's Transfer Status attribute (change order P2 or P3 defined attribute for the Change.TransferStatusAttribute property).

For more information, see Chapter 10 > Modify Flex Fields > Step 6.

[Figure 7–2](#), [Figure 7–3](#), and [Figure 7–4](#) illustrate the change order release integration sequence:

**Figure 7–2 Change order release integration diagram (1 of 3)**

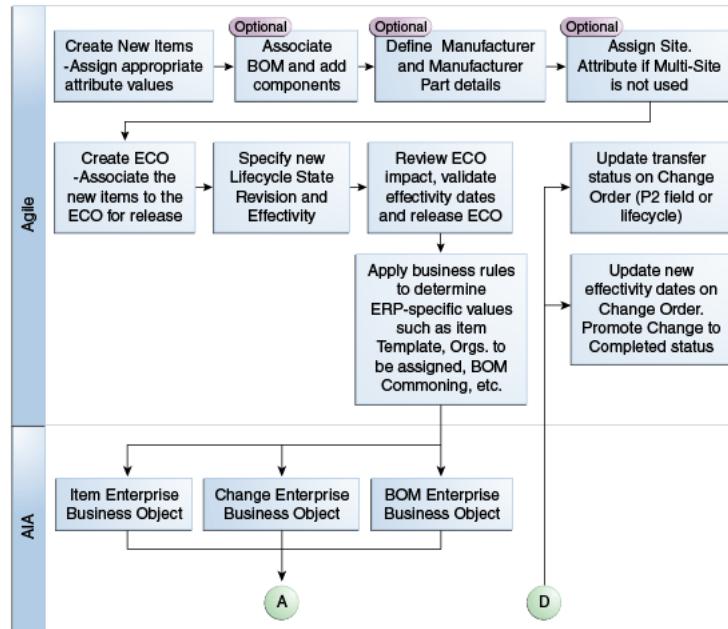


Figure 7–3 Change order release integration diagram (2 of 3)


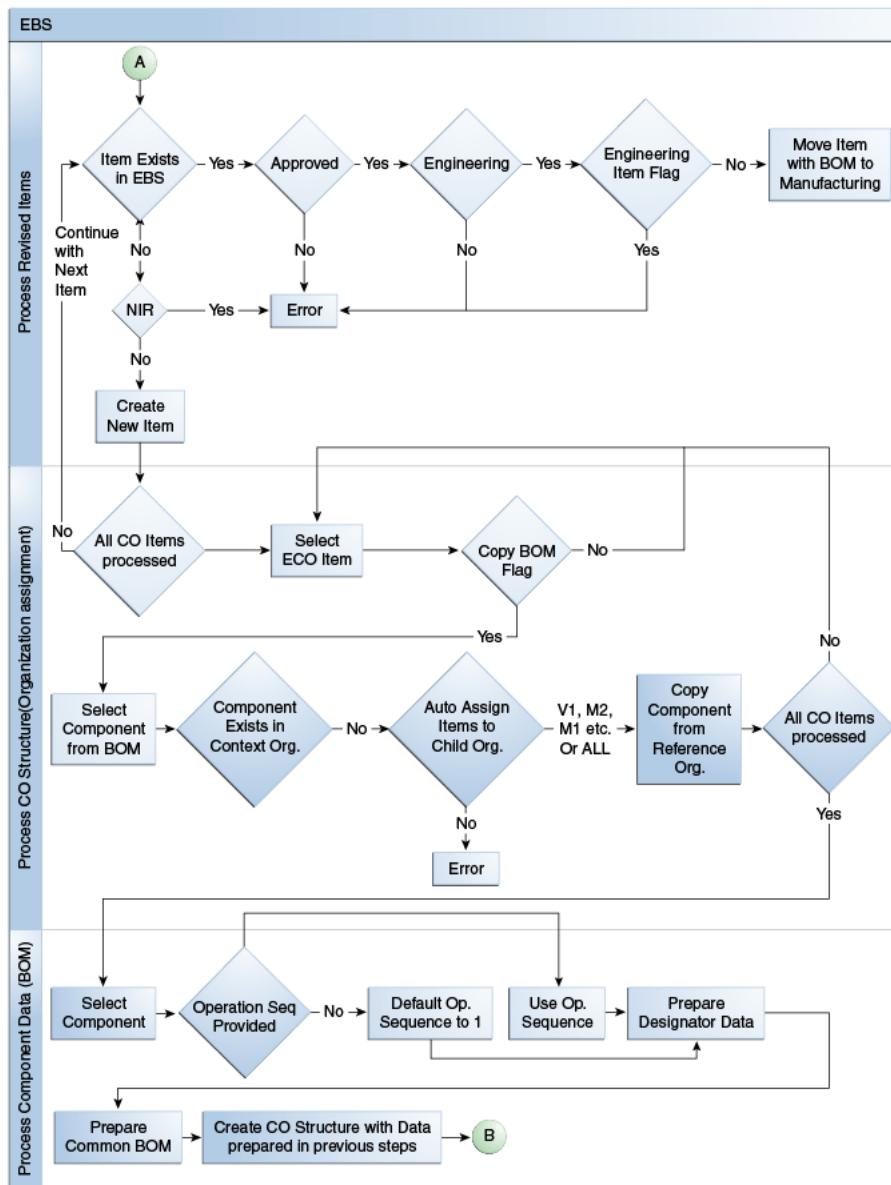


Figure 7–4 Change order release integration diagram (3 of 3)

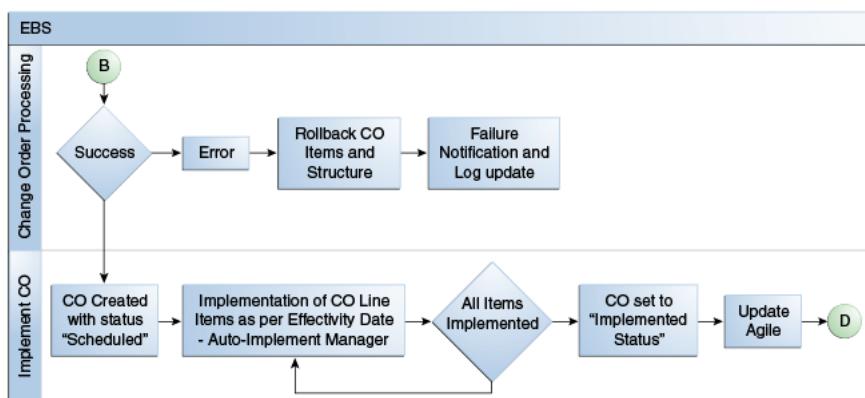

---

**Note:** The integration flow is the same for both ECO and Part/Product Release (PREL) use cases.

---

## 7.2.6 Exceptions

The following exception conditions create error messages for this integration process:

- If Agile PLM and Oracle E-Business Suite are not in sync with regards to the earlier revision of the revised item (that is, per the data from Agile PLM, the old revision of the item does not match the current revision of the item in Oracle E-Business Suite), an error occurs.
- Failure to update the queue status.
- Errors raised during the transformations.

## 7.2.7 Change Order Release Integration Services Orchestration

Figure 7-5 and Figure 7-6 illustrate change order release integration flow:

**Figure 7-5 Change order release integration flow (1 of 2)**

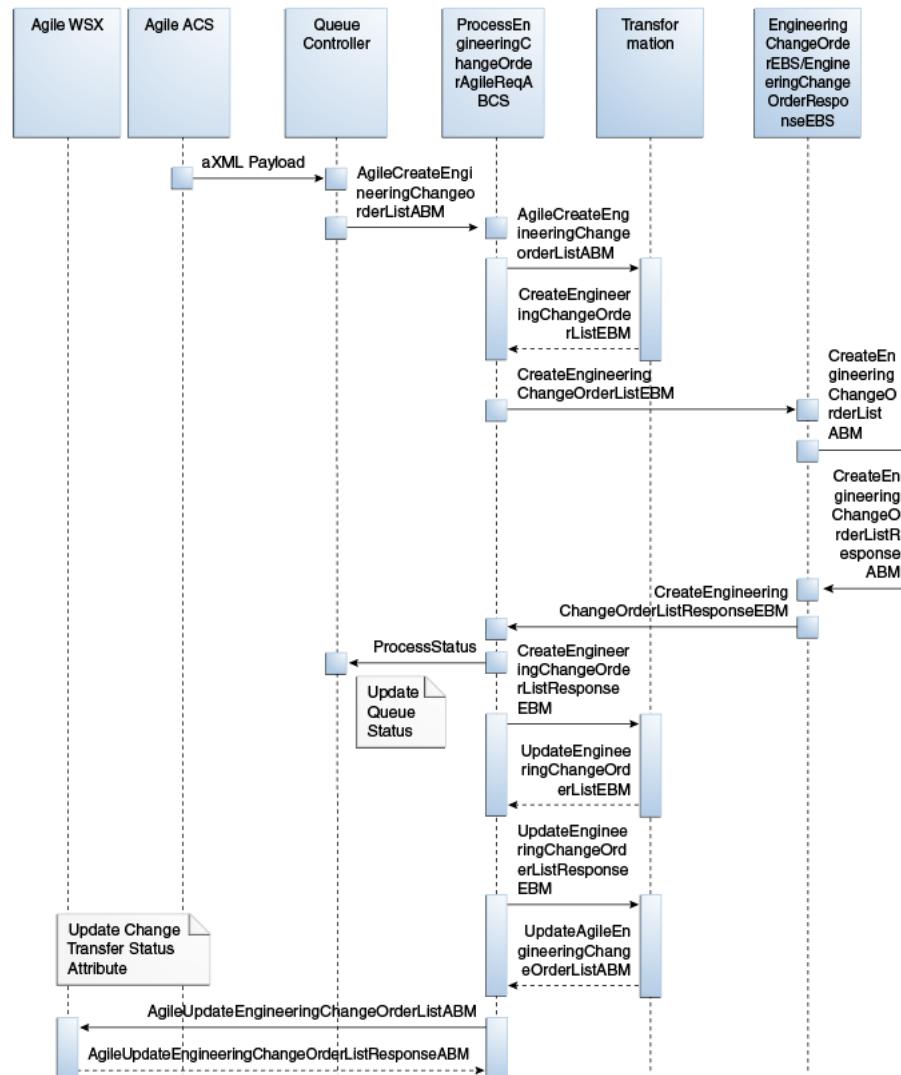


Figure 7–6 Change order release integration flow (2 of 2)

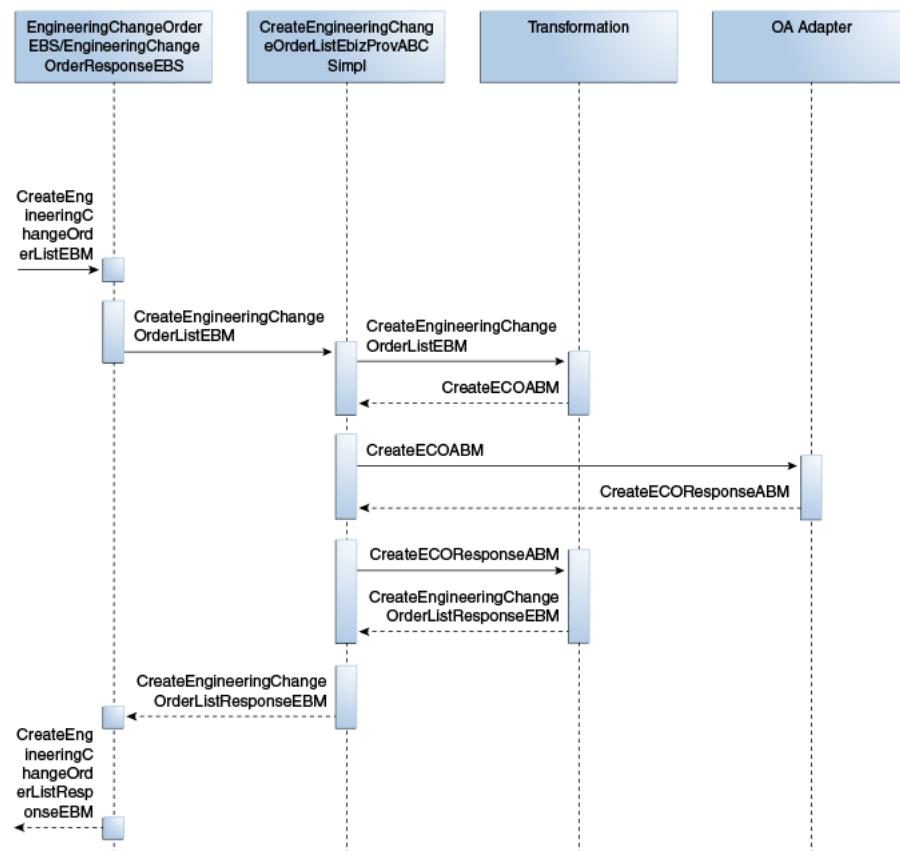


Table 7–2 lists the activities involved in this integration:

Table 7–2 Activities involved in Change Order Release integration

Step	Activity	Remarks
1	Agile PLM ACS transmits Agile PLM ECO data in payload in the form of predefined XML format known as aXML. This file will be queued up for further processing.	For the ECO process flow to be triggered, an ACS Workflow Event is generated on approval of ECO in Agile PLM.
2	The QueueController Framework reads the highest priority Queue Message and transforms the payload (aXML) to AgileCreateEngineeringChangeOrderListABM.	QueueController processes the payload.
3	QueueController invokes the ProcessEngineeringChangeOrderAgileReqABCSIm pl with AgileCreateEngineeringChangeOrderListABM as input.	
4	AgileCreateEngineeringChangeOrderListABM is transformed into CreateEngineeringChangeOrderListEBM.	EBM is created.
5	ProcessEngineeringChangeOrderAgileReqABCSIm pl invokes the CreateEngineeringChangeOrderList operation on EngineeringChangeOrderEBS with CreateEngineeringChangeOrderListEBM as input.	

**Table 7-2 (Cont.) Activities involved in Change Order Release integration**

Step	Activity	Remarks
6	EngineeringChangeOrderEBS routes CreateEngineeringChangeOrderListEBM to CreateEngineeringChangeOrderListEbizProvABC Impl.	
7	CreateEngineeringChangeOrderListEbizProvABC Impl transforms CreateEngineeringChangeOrderListEBM into the input of Oracle E-Business Suite service and calls that service.	This activity creates items in PIM/Oracle E-Business Suite, creates an ECO, associates revised items with this ECO, and creates BOM.
8	CreateEngineeringChangeOrderListEbizProvABC Impl invokes the CreateEngineeringChangeOrderListResponse operation on EngineeringChangeOrderResponseEBS with CreateEngineeringChangeOrderListResponseEBM as input.	
9	EngineeringChangeOrderResponseEBS routes CreateEngineeringChangeOrderListResponseEBM to ProcessEngineeringChangeOrderAgileReqABC Impl	Response message routing.
10	ProcessEngineeringChangeOrderAgileReqABC Impl sends the status back to the QueueController to update the queue.	This status is updated against the queue message in the database by the QueueController.
11	ProcessEngineeringChangeOrderAgileReqABC Impl transforms CreateEngineeringChangeOrderListResponseEBM into AgileUpdateEngineeringChangeOrderListABM. AgileUpdateEngineeringChangeOrderListABM is sent as an input to the Agile PLM Web Service. AgileUpdateEngineeringChangeOrderListRespon seEBM is sent to ProcessEngineeringChangeOrderAgileReqABC Impl.	The Web services update the transfer status of the change order in Agile PLM, which will be a predefined P2 or P3 attribute on the change order object in Agile PLM.  <b>Note:</b> The ProcessEngineeringChangeO rderAgileReqABC Impl composite uses the oracle/wss_http_token_ client_policy client security policy while calling the ChangeABS service hosted on the Agile server. The security credentials for this are stored in the csf-key AgileWebServicesKey on Fusion Middleware (FMW). The Agile username and password need to be setup correctly so that the Agile service is invoked successfully from the AIA composite in the FMW layer.

## 7.3 Solution Assumptions and Constraints

1. When an introductory revision of an item is released for the first time in Agile PLM (which can be done on an ECO or MCO but not on an SCO), the assumption is that the item has been authored in Agile PLM and does not exist in Oracle E-Business Suite.

In such cases, the item must be created using the templates in Oracle E-Business Suite

2. Any subsequent release of the item from Agile PLM should be sent as an update transaction, and should be expected that the item already exists in the master organization.

In this case, however, if the item does not exist, the item will be created in Oracle E-Business Suite. Items and updates can be released through the ECO, MCO, or SCO but only ECO allows the creation of new revisions.

3. The ECO is used to associate new revision, effectivity date, BOM, and reference designator information with the new item.
4. The ECO is used to transfer the new part or part update information from Agile PLM to Oracle E-Business Suite.
5. Every ECO process is monitored for its status.
6. The user is able to prioritize the ECO processes.
7. A new process can start running only after the first process is completed.
8. It is assumed that the manufacturer already exists in Oracle E-Business Suite.
9. Manufacturer names between Agile PLM and Oracle E-Business Suite are not mapped through DVMs.

Therefore, care should be taken to ensure the Agile Manufacturer names match the Manufacturer Name in the Manufacturer List in Oracle E-Business Suite.

10. BOM Replicate and BOM Commoning features are addressed through extensions.
11. The Substitute Components feature is addressed through extensions.
12. When an item in Agile has an *Obsolete* or *Inactive* Lifecycle status, an ECO or MCO must be created with the lifecycle status of *inactive* or *obsolete* and assign it to the Master Organization. This will also set the status at the child organization.

### 7.3.1 Using Inactive or Obsolete Lifecycle Status

You might encounter an error when running the Lifecycle inactive status for the master organization.

Here are the steps to run the Lifecycle inactive status only for the master organization:

1. Create the item in Agile for both ITM and TSC Organization.
2. Sync this to EBS, and confirm item exist in both Organization.

## 7.4 Agile PLM Interfaces

[Table 7-3](#) lists the Agile PLM Web Services Definition Language (WSDL) files:

**Table 7-3 Agile PLM Web Services Definition Language (WSDL) files**

Interface	Description
ProcessEngineeringChangeOrderAgileReqABCS	
ChangeABS.wsdl	Used to create an EngineeringChangeOrder in Oracle E-Business Suite

[Table 7-4](#) lists the Agile PLM XML Schema Definition (XSD) files:

**Table 7–4 Agile PLM XML Schema Definition (XSD) files**

Interface	Description
CreateEngineeringChangeOrderAgileReqABCS	
EngineeringChangeOrderABM.xsd	Contains CreateEngineeringChangeOrderListABM and CreateEngineeringChangeOrderListResponse ABM, and corresponding ABOs.
EngineeringChangeOrderABO.xsd	

## 7.5 Oracle E-Business Suite Interfaces

[Table 7–5](#) lists the Oracle E-Business Suite WSDL files:

**Table 7–5 Oracle E-Business Suite WSDL files**

Interface	Description
CreateEngineeringChangeOrderListEbizProvABCSImpl	
CreateEngineeringChangeOrderListEbizAdapter.wsdl	Used for the OA adapter INV_EBI_CHANGE_ORDER_PUB/PROCESS_CHANGE_ORDER_LIST pl/sql function call

[Table 7–6](#) lists the Oracle E-Business Suite XSD files:

**Table 7–6 Oracle E-Business Suite XSD files**

Interface	Description
CreateEngineeringChangeOrderListEbizProvABCSImpl	
APPS_INV_EBI_CHANGE_ORDER_PUB_PROCESS_CHANGE_ORDER_LIST.xsd	Used for input/output ABM of INV_EBI_CHANGE_ORDER_PUB/PROCESS_CHANGE_ORDER_LIST API call

## 7.6 Core AIA Components

[Table 7–7](#) lists the core AIA components:

**Table 7–7 Core AIA Components**

Component	Name
EBOs	EngineeringChangeOrderEBO
EBMs	CreateEngineeringChangeOrderListEBM CreateEngineeringChangeOrderListResponseEBM
EBSs	EngineeringChangeOrderEBS EngineeringChangeOrderResponseEBS

[Table 7–8](#) lists the core components locations:

**Table 7-8 Core components locations**

Component	Location
EBO and EBM XML Schema Definition (XSD) files	\$AIA_HOME/AIAMetaData/AIAComponents/EnterpriseObjectLibrary/Core/EBO/ \$AIA_HOME/AIAMetaData/AIAComponents/ApplicationObjectLibrary/Ebiz/Release1/Core
Web Service Definition Language (WSDL) files	\$AIA_HOME/apps/AIAMetaData/AIAComponents/EnterpriseBusinessServiceLibrary/Core/EBO/ \$AIA_HOME/AIAMetaData/AIAComponents/ExtensionServiceLibrary/Ebiz \$AIA_HOME/AIAMetaData/AIAComponents/ApplicationConnectorServiceLibrary/Ebiz/V1

For detailed documentation of individual EBOs and EBMs, click the AIA Reference Doc link on EBO and EBM detail pages in Oracle Enterprise Repository.

For more information, see *Oracle Fusion Middleware Infrastructure Components and Utilities User's Guide for Oracle Application Integration Architecture Foundation Pack 11g Release 1*.

EBOs can be extended, for instance, to add new data elements. These extensions are protected and will remain intact after a patch or an upgrade.

For more information, see *Oracle Fusion Middleware Concepts and Technologies Guide for Oracle Application Integration Architecture Foundation Pack 11g Release 1*, "Understanding Extensibility."

## 7.6.1 Agile PLM and Oracle E-Business Suite Components for Change Order Release

Table 7-9 lists Agile PLM and Oracle E-Business Suite services used in this integration:

**Table 7-9 Agile PLM and Oracle E-Business Suite services in this Integration**

Services	Agile PLM (Requester)	Oracle E-Business Suite (Provider)
ABMs	AgileCreateEngineeringChangeOrderListABM AgileCreateEngineeringChangeOrderListResponseABM AgileUpdateEngineeringChangeOrderListABM AgileUpdateEngineeringChangeOrderListResponseABM	CreateECOABM CreateECOResponseABM
ABCS	ProcessEngineeringChangeOrder AgileReqABCSImpl	CreateEngineeringChangeOrderListEbizProvABCSImpl
EBSs	EngineeringChangeOrderEBS (CreateEngineeringChangeOrder List Operation)	EngineeringChangeOrderResponseEBS (CreateEngineeringChangeOrder ListResponse Operation)
Business Process Execution Language (BPEL)	CreateQueueService QueueProcessorServiceImpl	NA

**Table 7-9 (Cont.) Agile PLM and Oracle E-Business Suite services in this Integration**

Services	Agile PLM (Requester)	Oracle E-Business Suite (Provider)
Adapter service	ACSAXMLJMSConsumer CreateQueueControlService QueueProcessorService	CreateEngineeringChangeOrderListEbizAdapter

Table 7-10 lists the core components locations:

**Table 7-10 Core components locations**

Component	Location
Application Business Objects, ABM, and Common XSD files	\$AIA_HOME/AIAMetaData/AIAComponents/ApplicationObjectLibrary/Agile PLM/V1/schemas \$AIA_HOME/AIAMetaData/AIAComponents/ApplicationObjectLibrary/Ebiz/V1/schemas \$AIA_HOME/AIAMetaData/AIAComponents/ApplicationObjectLibrary/Ebiz/Release1/Core
WSDL files	\$AIA_HOME/AIAMetaData/AIAComponents/ApplicationObjectLibrary/Agile PLM/V1/wsdl \$AIA_HOME/AIAMetaData/AIAComponents/ApplicationObjectLibrary/Ebiz/wsdl \$AIA_HOME/AIAMetaData/AIAComponents/ExtensionServiceLibrary/Ebiz \$AIA_HOME/AIAMetaData/AIAComponents/ApplicationConnectorServiceLibrary/Ebiz/V1

## 7.7 Integration Services

The integration services for the change order release process are:

- EngineeringChangeOrderEBS
- ProcessEngineeringChangeOrderAgileReqABCSImpl
- CreateEngineeringChangeOrderListEbizProvABCSImpl

### 7.7.1 EngineeringChangeOrderEBS

EngineeringChangeOrderEBS exposes the operations related to the ECO integration on the EngineeringChangeOrder EBO.

The following list itemizes the routing rules:

- EngineeringChangeOrderEBS service:
 

CreateEngineeringChangeOrderList: Routes  
CreateEngineeringChangeOrderListEBM to  
CreateEngineeringChangeOrderListEbizProvABCSImpl
- EngineeringChangeOrderResponseEBS service:
 

CreateEngineeringChangeOrderListResponse: Routes  
CreateEngineeringChangeOrderListResponseEBM to  
ProcessEngineeringChangeOrderAgileReqABCSImpl

## 7.7.2 ProcessEngineeringChangeOrderAgileReqABCSImpl

ProcessEngineeringChangeOrderAgileReqABCSImpl is used for transforming AgileCreateEngineeringChangeOrderListABM into CreateEngineeringChangeOrderListEBM. This service invokes the CreateEngineeringChangeOrderList operation on EngineeringChangeOrderEBS for creation of an ECO in Oracle E-Business Suite. Based on the status of the ECO creation in Oracle E-Business Suite, this service updates the queue status. In addition, this service updates the transfer status attribute in the change order.

This service is implemented as an asynchronous BPEL process:

1. The QueueController creates AgileCreateEngineeringChangeOrderListABM and invokes ProcessEngineeringChangeOrderAgileReqABCSImpl.
2. ProcessEngineeringChangeOrderAgileReqABCSImpl transforms AgileCreateEngineeringChangeOrderListABM into CreateEngineeringChangeOrderListEBM and invokes the CreateEngineeringChangeOrderList operation on EngineeringChangeOrderEBS with CreateEngineeringChangeOrderListEBM as an input.
3. CreateEngineeringChangeOrderListResponseEBM is received from EngineeringChangeOrderEBS and based on the status of the ECO creation in Oracle E-Business Suite; the QueueController is invoked to update the status of the queue message.
4. ProcessEngineeringChangeOrderAgileReqABCSImpl transforms CreateEngineeringChangeOrderListResponseEBM into AgileUpdateEngineeringChangeOrderListABM, which is sent as an input to the Agile PLM Web service.
5. The Web services update the transfer status of the change order in Agile PLM, which is a predefined P2 or P3 attribute on the change order object in Agile PLM. AgileUpdateEngineeringChangeOrderListResponseABM is sent to ProcessEngineeringChangeOrderAgileReqABCSImpl.

## 7.7.3 CreateEngineeringChangeOrderListEbizProvABCSImpl

This is a single operation service. This accepts an ECO-containing item and BOM information message as a request and returns a response.

In Agile PLM to Oracle E-Business Suite flow, CreateEngineeringChangeOrderListEbizProvABCSImpl is used for transforming CreateEngineeringChangeOrderListEBM into CreateECOABM, which invokes the CreateEngineeringChangeOrderList operation in Oracle E-Business Suite.

In the return flow, the OA Adapter sends CreateECOResponseABM, which is transformed by CreateEngineeringChangeOrderListEbizProvABCSImpl into CreateEngineeringChangeOrderListResponseEBM.

This service is implemented as an asynchronous BPEL Process.

---

# Process Integration for Change Order Update

This chapter provides an overview of the process integration for change order update and discusses:

- Change order update process integration
- Solution assumptions and constraints
- Agile Product Lifecycle Management (PLM) interfaces
- Oracle E-Business Suite interfaces
- Core Application Integration Architecture (AIA) components
- Integration services

## 8.1 Overview

The change order update process flow is triggered by Oracle E-Business Suite. Change order information needs to flow from the Oracle E-Business Suite system to Agile PLM in the following cases:

- Change order is completely implemented in Oracle E-Business Suite.  
This step can be configured to trigger a change order status change in Agile PLM and a change order Page Two or Page Three field update in Agile PLM. Because a change order can be created in multiple organizations in Oracle E-Business Suite and the change order can have different statuses in each organization, this operation is carried out only when the change order is completely implemented in all the organizations for which it has been created in Oracle E-Business Suite.
- Change order line status or effectivity date changes in Oracle E-Business Suite.  
In either case, the effectivity date of the change order line in Oracle E-Business is reflected on the corresponding line in Agile PLM. This update can be carried out only if the change order is created in only one organization in Oracle E-Business, or if a one-to-one correspondence between the Oracle E-Business organizations and Agile PLM sites for posting change order data exists.
- Change status for a change object in Oracle E-Business Suite. This includes a success or failure status of a new part number generation or of a change order validation.

---

**Note:** Some of these cases have restrictions in a multi-org environment because of the centralized (Agile PLM) to decentralized (Oracle E-Business Suite) nature of the interface.

---

## 8.2 Change Order Update Process Integration

Four types of events can cause a change:

1. An update to the implementation status of a change order line.

While the implementation status in Oracle E-Business Suite is tracked at a Bills of Material (BOM) line level, this is tracked at a change order line level in Agile PLM.

2. A modification of the scheduled effectivity date of a change order line.

While the effectivity dates in Oracle E-Business Suite are tracked at a BOM line level, these are tracked at a change order line level in Agile PLM.

3. An update to the status of a new part request of a change order line.

4. An update to the status of a change order validation.

---

**Note:** The cancellation or purge of a change order in Oracle E-Business Suite is not interfaced back to Agile PLM as part of this integration. These events should be handled manually in both applications.

---

The change order update process includes:

1. The effectivity date and item status is modified in the BOM line item in Oracle E-Business Suite.

2. The batch process for publishing the changed information initiates at a specified frequency (configurable).

While the update to information in Agile PLM is driven through the scheduled batch processes, it is also possible to trigger the information update event from Oracle E-Business Suite through the Integrations Administrator and running the Publish Engineering Change Order Updates function.

3. The change number and specified item record is queried for modification.

4. The effectivity date is modified in the mapped column in Agile PLM.

5. The change status is updated in the mapped attribute in Agile PLM.

6. If the complete update is processed successfully, the integration updates the date and time of the last successful run.

### 8.2.1 Change Order Update Process Inputs

The following parameters are used by the change order update process in Agile PLM:

- Change order number, which will uniquely identify the change object.

In case of modification to the effective dates, the item number that will uniquely identify the change order line (affected items) and the effective date as of which the change line is scheduled to be implemented.

- Field to be updated with the transfer or implementation status of the change in Oracle E-Business Suite.

- When a change order is first transferred to Oracle E-Business Suite, the change order status in Oracle E-Business Suite is open or scheduled. All the possible statuses for a change order in Oracle E-Business Suite are:
  - Open
  - Hold
  - Scheduled
  - Rescheduled
  - Implemented
  - Canceled
- Agile PLM's Transfer Status attribute (such as Transferred, Implemented, and Canceled).
- Status to be promoted or demoted in case of the change status for a new part generation or a change or validation.

### 8.2.2 Change Order Update Processing

The process includes the following steps:

1. The change order number and the specific affected item attributes are queried for modification.
2. Agile PLM's change order line is updated.

This can be done in a batch mode through a scheduled process. This means that the effectivity information is read for a group of change lines in Oracle E-Business Suite and sent through the interface. This process may also be triggered by the event of a change line being implemented in Oracle E-Business Suite.

The update step can process all the change order lines in the batch before committing, or it can commit each change order line individually before moving on to the next one. This decision should be taken from a technical efficiency perspective.

When processing a batch of change order lines, if the update for one record ends due to error, the process continues to process the other records in the batch. A list of all errors that occur when the batch is being processed is accumulated and logged.

---

**Note:** The effectivity date for the affected items is not updated if the multisite is enabled but the sites are not assigned to that particular affected item.

---

3. In case of effective date changes, the new effectivity date for the change order line is updated on the mapped column in Agile PLM.
  - The mapped effectivity date column in Agile PLM is updated with the incoming effectivity date only if the incoming status is implemented.
  - The configured column in Agile PLM is updated with a configured value based on the incoming status. The following examples illustrate a sample of these rules:

If the change order status in Oracle E-Business Suite is Scheduled, update the Affected Items.Status (an Affected Items tab list-validated flex-field) in Agile PLM with the value Not Implemented.

If the change order status in Oracle E-Business Suite is Implemented, update the Affected Items.Status field in Agile PLM with the value of Implemented, and update the Affected Items.ERP Implementation Date (an Affected Items tab date flex-field) with the effective date from Oracle E-Business Suite.

**4. Agile PLM's Transfer Status attribute is updated.**

After a successful transfer, the change order update process updates the Agile PLM's Transfer Status attribute (change order Agile PLM P2 or P3 defined attribute value for the Change.TransferStatusAttribute property) with a value of Transferred.

In case of multiple organizations, Agile PLM contains only a single instance of the change order and not site-specific ones but Oracle E-Business can contain multiple organizations. So in case of multiple organizations within Oracle E-business Suite:

- The Transfer Status attribute (change order Agile PLM P2 or P3 defined attribute value for the Change.TransferStatusAttribute property) in Agile PLM reflects the status of Transferred until the change order is completely implemented in all the Oracle E-Business organizations. After all the Oracle E-Business Suite organizations are implemented, Agile PLM's transfer status will be updated with a status of Implemented.
  - If the change order errors when implemented in one or more Oracle E-Business Suite organizations and is waiting for implementation in other organizations or has been implemented successfully in some of the organizations, Agile PLM's transfer status value will remain as Transferred.
  - If the change order errors when implemented in all the Oracle E-Business organizations, Agile PLM's transfer status value will be changed to Errorred.
  - If the change order has been canceled in all the Oracle E-Business organizations, Agile PLM's transfer status will be changed to Canceled.

Because the change status name depends on the workflow being used, the CHANGE\_STATUS configuration table is provided as part of the integration setup. This table allows the administrators to specify the next status for each possible combination of the change object type and the workflow being used for each event that qualifies for the Change Status operation. The administrators can add as many rows as they require, because the number of sub-classes of the change objects and the number of workflows is unlimited in Agile PLM. [Table 8-1](#) illustrates a partially configured table:

**Table 8-1 Partially Configured Change Status and Workflow Table**

EVENT	OUTCOME	SUBCLASS	WORKFLOW	NEXT_STATUS
Change Implemented	SUCCESS	ECO	Default Change Orders	Implemented

The EVENT column key is **Change Implemented**.

The OUTCOME column key is **SUCCESS**.

In the SUBCLASS column, set up the change order subclass as ECO, MCO, etc.

In the WORKFLOW column, set up the workflows. For example, if you are using Default Change Order workflow for ECO, then enter Default Change Order in this column. These values can be picked up from Agile PLM Java client.

In the NEXT\_STATUS column, enter the status of the workflow you want it to move to when the conditions are met. For example, when a Change is implemented (identified by event - this is a key, do not change it) and the OUTCOME is SUCCESS (identified by outcome, gets checked while changing status here), and the WORKFLOW chosen is Default Change Orders, the setup requesting the Change to be moved to the Implemented status (NEXT\_STATUS).

In a new installation, this table will be empty. The integration administrator must add rows in this table if the change status process needs to be supported for any of the given processes.

- The value of the EVENT column must be limited to the values corresponding to the processes supported: New Part Request, Pre-release Audit, and Change Implementation. The change implementation process can also be associated with a status update back to a flexfield on the change order.
- The value of the OUTCOME column must be limited to Success and Failure.
- The value of the SUBCLASS column must be limited to the set of subclasses of the Change Requests Class, Change Orders Class, Manufacturing Orders Class, and Site Change Orders Class.
- The value of the WORKFLOW column must be limited to the set of workflows for the selected subclass. For example, if you are using the default change order workflow for ECO, then enter the default change order in this column. These values can be picked up from the Agile PLM Java client.
- In the NEXT\_STATUS column, enter the status of the workflow that you want to move to when the conditions are met. For example, when a change is implemented (identified by event; this is a key, so do not change it) and the OUTCOME is SUCCESS (identified by outcome; this is checked while changing status here) and the WORKFLOW chosen is Default Change Orders, the setup requesting the change to be moved to the implemented status (NEXT\_STATUS).

### 8.2.3 Change Order Update Sample Use Case

1. Release an ECO, C0001, from Agile PLM to Oracle E-Business Suite.
2. In Oracle E-Business Suite, create this ECO in three organizations: Org1, Org2, and Org3.
3. Change the status of this ECO in Org1 as implemented.
4. Oracle E-Business Suite triggers an event to send the ECO list to Agile PLM.

This list has C0001 in Org1, C0001 in Org2, and C0001 in Org3. Only C0001 of Org1 carries the complete data, including the affected items data, while C0001 in the other organizations carries only the header information.

5. When Agile PLM receives the ECO list, the ECO data is updated and the workflow status of ECO is changed.


The change of workflow status is based on the following rules:

- When the status of ECO is implemented in all organizations in Oracle E-Business Suite, move the ECO in Agile PLM to the implemented status.
- The Transfer Status field in Agile PLM is updated only when the status of ECO is the same in all the Oracle E-Business Suite organizations.

6. Hence, if the status is implemented across all the C0001 ECOs in all organizations, the transfer status field on ECO in Agile PLM is updated as implemented.
7. If an entry in the CHANGE\_STATUS table corresponding to the event Change Implemented and SubClass ECO exists, and the workflow is mentioned on ECO C0001 in Agile PLM, read the next status and send it to the next status mentioned.
8. If no entry is in the CHANGE\_STATUS table for the data, no ECO C0001 is sent to the next status.

Figure 8-1 illustrates the integration sequence for the change order update from Oracle E-Business Suite to Agile PLM:

**Figure 8-1 Change order update process integration sequence**

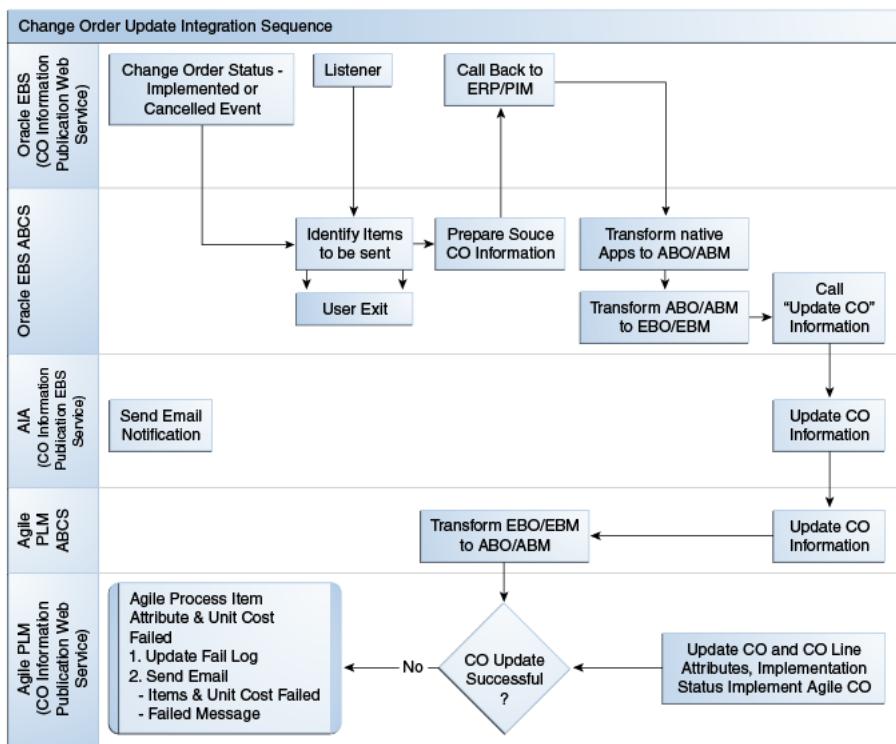

## 8.2.4 Exceptions

The following exception conditions create error messages for this integration process:

- Insufficient privilege to discover, read, or update attributes on the Change object
- Invalid field value (indicate the field for which the value is incorrect, and the value that is being passed on to the field)
- Change object does not exist
- Change line does not exist
- Invalid status name
- Missing exit or entry required fields

## 8.2.5 Change Order Update Integration Services Orchestration

Figure 8-2 illustrates the integration services orchestration of Oracle E-Business Suite for change order update:

**Figure 8-2 Oracle E-Business Suite integration services orchestration**

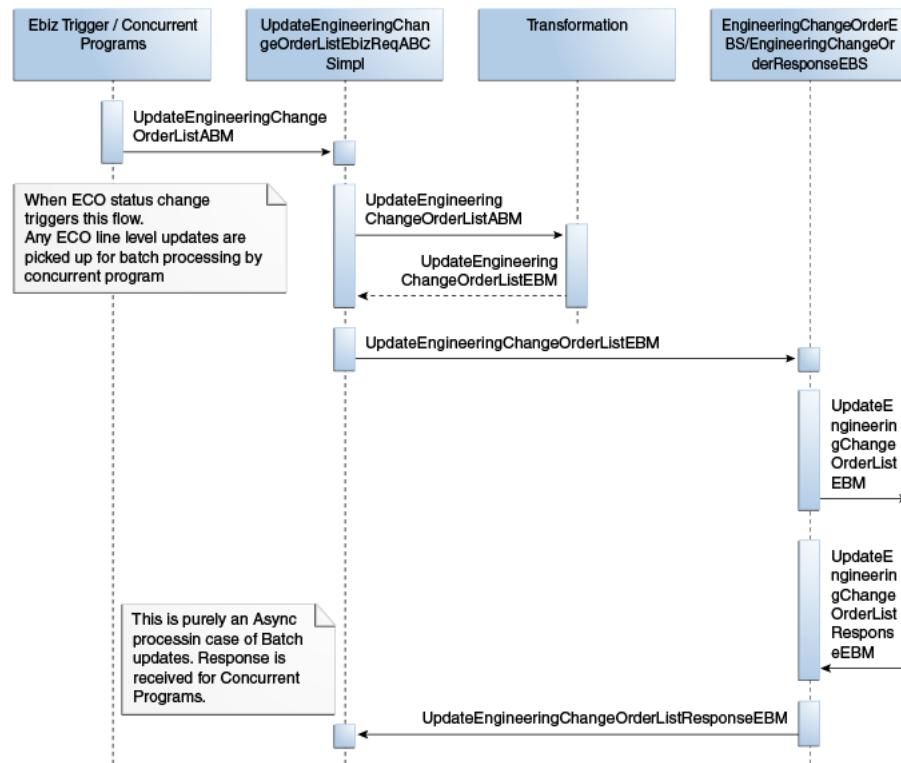
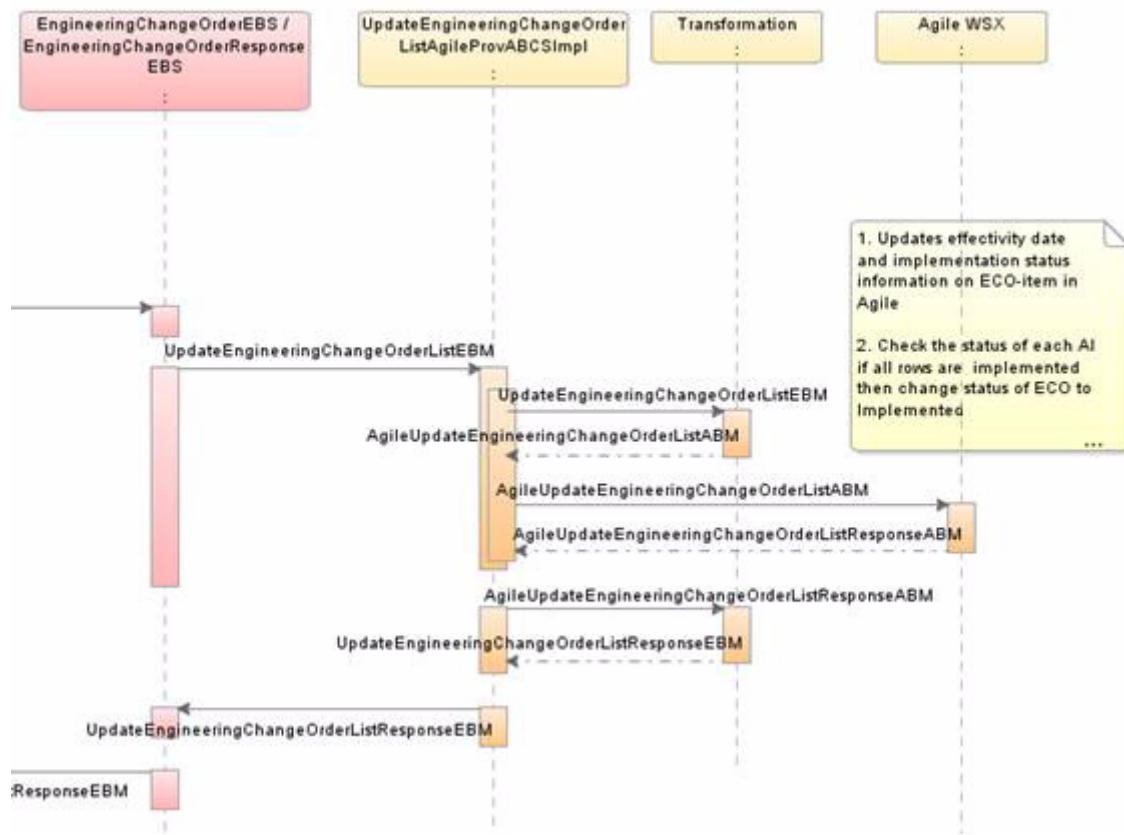


Figure 8-3 illustrates the integration services orchestration of Agile PLM for change order update:

**Figure 8–3 Agile PLM side integration services orchestration**

**Table 8–2** lists the activities involved in the change order update integration services orchestration:

**Table 8–2 Activities in Change Order Update integration Orchestration**

Step	Activity	Remarks
1.	Invoke <code>UpdateEngineeringChangeOrderListEbizReqABCSImpl</code> process.	When change order lines are auto-implemented after reaching effectiveness dates, <code>UpdateEngineeringChangeOrderListEbizReqABCSImpl</code> triggers <code>UpdateEngineeringChangeOrderListEBM</code> . <code>UpdateEngineeringChangeOrderListEBM</code> transforms <code>UpdateEngineeringChangeOrderListABM</code> into <code>UpdateEngineeringChangeOrderListEBM</code> .
2.	UpdateEngineeringChangeOrderListEbizReqABCSImpl invokes the <code>EngineeringChangeOrderEBS</code> with the <code>UpdateEngineeringChangeOrderList</code> operation.	An invoke activity in <code>UpdateEngineeringChangeOrderListEbizReqABCSImpl</code> invokes the <code>UpdateEngineeringChangeOrderList</code> operation on <code>EngineeringChangeOrderEBS</code> with <code>UpdateEngineeringChangeOrderListEBM</code> as the input.

**Table 8–2 (Cont.) Activities in Change Order Update integration Orchestration**

Step	Activity	Remarks
3	EngineeringChangeOrderEBS routes UpdateEngineeringChangeOrderListEBM to UpdateEngineeringChangeOrderListAgileProvABCSCImpl. to UpdateEngineeringChangeOrderListAgileProvABCSCImpl.	EngineeringChangeOrderEBS routes UpdateEngineeringChangeOrderListEBM to UpdateEngineeringChangeOrderListAgileProvABCSCImpl.
4	UpdateEngineeringChangeOrderListAgileProvABCSCImpl does the transformation.	UpdateEngineeringChangeOrderListAgileProvABCSCImpl transforms UpdateEngineeringChangeOrderListEBM into AgileUpdateEngineeringChangeOrderListABM.
5	UpdateEngineeringChangeOrderListAgileProvABCSCImpl invokes Agile PLM Web Services.	<p>Agile PLM Web services are invoked with AgileUpdateEngineeringChangeOrderListABM as input.</p> <p><b>Note:</b> The UpdateEngineeringChangeOrderListAgileProvABCSCImpl composite uses the oracle/wss_http_token_client_policy client security policy while calling ChangeABS and MergeABS services hosted on the Agile server. The security credentials for this are stored in the csf-key AgileWebServicesKey on Fusion Middleware (FMW). The Agile username and password need to be setup correctly so that the Agile service is invoked successfully from the AIA composite in the FMW layer.</p> <p>The effectivity dates and implementation status of change order are updated in Agile PLM.</p> <p>A check determines whether all affected item rows are moved into implemented status.</p> <p>The change order status will be moved to Implemented when all affected items are implemented.</p> <p>AgileUpdateEngineeringChangeOrderListResponse ABM is sent to UpdateEngineeringCUpdateEngineeringChangeOrderListAgileProvABCSCImpl.</p>

### 8.3 Solution Assumptions and Constraints

1. This release of the integration intends to solve a use case in which any given change interfaces to only one destination.
2. The assumption is that the log information pertaining to the complete end-to-end process of transferring a change object from Agile PLM to Oracle E-Business Suite is available as a file to this operation.
3. Verifications for the setup validations of the sub-class, workflow, and status values not part of the scope.
4. The change object should already have an assigned workflow.

### 8.4 Agile PLM Interfaces

Table 8–3 lists the Agile PLM Web Services Definition Language (WSDL) files:

**Table 8–3 Agile PLM Web Services Definition Language (WSDL) files**

Interface	Description
UpdateEngineeringChangeOrderListAgileProvABCSImpl	
ChangeABS.wsdl	Used to update change order information in Agile PLM.
ChangeMerge.wsdl	

[Table 8–4](#) lists the Agile PLM XML Schema Definition (XSD) files:

**Table 8–4 Agile PLM XML Schema Definition (XSD) files**

Interface	Description
UpdateEngineeringChangeOrderListAgileProvABCSImpl	
EngineeringChangeOrderABM.xsd	Contains UpdateEngineeringChangeOrderListABM
EngineeringChangeOrderABO.xsd	and UpdateEngineeringChangeOrderListResponsesABM

## 8.5 Oracle E-Business Suite Interfaces

[Table 8–5](#) lists the Oracle E-Business Suite WSDL files:

**Table 8–5 Oracle E-Business Suite WSDL files**

Interface	Description
UpdateEngineeringChangeOrderListEbizReqABCSImpl	
QueryEngineeringChangeOrderListEbizAdapter.wsdl	Used for the OA adapter "INV_EBL_CHANGE_ORDER_PUB.GET_ECO_LIST_ATTR" pl/sql function call

[Table 8–6](#) lists the Oracle E-Business Suite XSD files:

**Table 8–6 Oracle E-Business Suite XSD files**

Interface	Description
UpdateEngineeringChangeOrderListEbizReqABCSImpl	
EngineeringChangeOrderABM.xsd	ABM for EngineeringChangeOrderABO
EngineeringChangeOrderABO.xsd	Created based on the input from the Concurrent Program to BPEL process and output to the Concurrent Program from BPEL process
APPS_INV_EBL_CHANGE_ORDER_PUB_GET_ECO_LIST_ATTR.xsd	Used for input/output ABM of INV_EBL_CHANGE_ORDER_PUB.GET_ECO_LIST_ATTR API call

## 8.6 Core AIA Components

[Table 8–7](#) lists the core AIA components for this process integration:

**Table 8–7 Core AIA components**

Component	Name
EBOs	EngineeringChangeOrderEBO

**Table 8–7 (Cont.) Core AIA components**

Component	Name
EBMs	UpdateEngineeringChangeOrderListEBM
	UpdateEngineeringChangeOrderListResponseEBM
EBS	EngineeringChangeOrderEBS

[Table 8–8](#) lists the core components locations:

**Table 8–8 Core components Locations**

Component	Location
EBO and EBM XSD files	\$AIA_HOME/AIMetaData/AIAComponents/EnterpriseObjectLibrary/Core/EBO/ \$AIA_HOME/AIMetaData/AIAComponents/ApplicationObjectLibrary/Ebiz/Release1/Core
WSDL files	\$AIA_HOME/AIMetaData/AIAComponents/EnterpriseBusinessServiceLibrary/Core/EBO/ \$AIA_HOME/AIMetaData/AIAComponents/ExtensionServiceLibrary/Ebiz \$AIA_HOME/AIMetaData/AIAComponents/ApplicationConnectorServiceLibrary/Ebiz/V1

For detailed documentation of individual EBOs and EBMs, click the AIA Reference Doc link on EBO and EBM detail pages in Oracle Enterprise Repository.

EBOs can be extended, for instance, to add new data elements. These extensions are protected and will remain integral after a patch or an upgrade.

For more information, see *Oracle Fusion Middleware Concepts and Technologies Guide for Oracle Application Integration Architecture Foundation Pack 11g Release 1*, "Understanding Extensibility."

### 8.6.1 Oracle E-Business Suite and Agile PLM Components for Change Order Update

[Table 8–9](#) lists the Oracle E-Business Suite and Agile PLM components for change order update:

**Table 8–9 Oracle E-Business Suite and Agile PLM components for change order update**

Services	Oracle E-Business Suite (Requester)	Agile PLM (Provider)
ABMs	UpdateEngineeringChangeOrderListABM	AgileUpdateEngineeringChangeOrderListABM
		AgileUpdateEngineeringChangeOrderListResponseABM
ABCs	UpdateEngineeringChangeOrderListEbizReqABCImpl	UpdateEngineeringChangeOrderListAgileProvABCImpl
EBS	EngineeringChangeOrderEBS	
	EngineeringChangeOrderResponseEBS	

Table 8–10 lists the core components locations:

**Table 8–10 Core components locations**

Component	Location
Application Business Objects, ABM and Common XSD files	\$AIA_HOME/AIAMetaData/AIAComponents/ApplicationObjectLibrary/Agile PLM/V1/schemas  \$AIA_HOME/AIAMetaData/AIAComponents/ApplicationObjectLibrary/Ebiz/V1/schemas  \$AIA_HOME/AIAMetaData/AIAComponents/ApplicationObjectLibrary/Ebiz/Release1/Core
WSDL files	\$AIA_HOME/AIAMetaData/AIAComponents/ApplicationObjectLibrary/Agile PLM/V1/wsdl  \$AIA_HOME/AIAMetaData/AIAComponents/ApplicationObjectLibrary/Ebiz/wsdl  \$AIA_HOME/AIAMetaData/AIAComponents/ExtensionServiceLibrary/Ebiz  \$AIA_HOME/AIAMetaData/AIAComponents/ApplicationConnectorServiceLibrary/Ebiz/V1

## 8.7 Integration Services

The integration services for the change order update are:

- EngineeringChangeOrderEBS
- UpdateEngineeringChangeOrderListEbizReqABCSImpl
- UpdateEngineeringChangeOrderListAgileProvABCSImpl

### 8.7.1 EngineeringChangeOrderEBS

EngineeringChangeOrderEBS is the Enterprise Business Service (EBS) that exposes the operations related to the ECO integration and change order update on the EngineeringChangeOrder EBO.

The following list itemizes the routing rules:

- EngineeringChangeOrderEBS service
  - UpdateEngineeringChangeOrderList: Routes
  - UpdateEngineeringChangeOrderListEBM to
  - UpdateEngineeringChangeOrderListAgileProvABCSImpl
- EngineeringChangeOrderResponseEBS service
  - UpdateEngineeringChangeOrderListResponse: Routes
  - UpdateEngineeringChangeOrderListResponseEBM to
  - UpdateEngineeringChangeOrderListEbizReqABCSImpl

## 8.7.2 UpdateEngineeringChangeOrderListEbizReqABCSImpl

- The requester ABCS, defined as a synchronous process, receives a list of change IDs from the Oracle E-Business Suite concurrent program.  
The list contains IDs that have `last_update_date` greater than the last run date of the concurrent program.
- The requester BPEL process filters the list of IDs to a list of IDs that are present in the cross-reference tables in the FMW layer.  
This provides a list of change orders that were actually from the Agile PLM System alone. The original list of change IDs may be those that are from non-Agile PLM sources as well.
- The BPEL process then makes an OA Adapter call out that calls the PL/SQL API, which provides the Item details that is sent out.  
This is the `UpdateEngineeringChangeOrderList` ABM.
- A transformation converts `UpdateEngineeringChangeOrderListABM` to `UpdateEngineeringChangeOrderListEBM`.
- An asynchronous request-delayed response call is made to `EngineeringChangeOrderEBS` with `UpdateEngineeringChangeOrderListEBM`.  
This call is routed to the appropriate provider.
- The BPEL instance is reactivated from dehydration store when the asynchronous call returns from the provider and provides the status of the transaction to the caller concurrent program (because it is a synchronous call).
- The concurrent program logs the status of this call.

## 8.7.3 UpdateEngineeringChangeOrderListAgileProvABCSImpl

`UpdateEngineeringChangeOrderListAgileProvABCSImpl` updates a change order transfer status and attributes in Agile PLM.

This service is implemented as an asynchronous process.

- `UpdateEngineeringChangeOrderListAgileProvABCSImpl` is invoked by `EngineeringChangeOrderEBS` with `UpdateEngineeringChangeOrderListReqMsg`, which contains `UpdateEngineeringChangeOrderListEBM` as input.
- Transform operation is called to convert `UpdateEngineeringChangeOrderListEBM` into `AgileUpdateEngineeringChangeOrderListABM`.
- `AgileUpdateEngineeringChangeOrderListABM` is passed as an input to the Web service operation:
  - Updates the transfer status-related attributes on the change order
  - Updates effectivity dates and implementation status.
  - If all affected items statuses are implemented, changes status of the change order to implemented (for Oracle E-Business Suite to Agile PLM flow).
- `AgileUpdateEngineeringChangeOrderListResponseABM` is received after the successful run of the Coarse Grained API `UpdateChange`.
- If the `UpdateChange` service operation fails in Agile PLM, a new fault is generated and sent across with an appropriate error message.



---

# Process Integration for Variant Management

This chapter provides an overview of the process integration for variant management and discusses:

- Variant management process integration
- Solution assumptions and constraints
- Agile Product Lifecycle Management (PLM) interfaces
- Oracle E-Business Suite interfaces
- Core Application Integration Architecture (AIA) components
- Integration services

## 9.1 Overview

Product variants are defined very early in the development process. In most cases, the decision that a product should come in multiple variants (and which ones) is already made even before designers start with their work.

That said, the development and the engineering team (possibly in collaboration with a product manager) would further specify the characteristics of the product and its variants. This includes the definition that which product components (parts, assemblies) are optional and which components can be picked from various options. The engineering team will also define technical configuration rules (constraints), reflecting their knowledge of the product components that cannot be combined (or the other way round: they always have to be used in combination).

As the product development process moves forward, the quality team will be involved. Together with the engineering team, they define reference configurations (individual product variants that cover, for example, the extreme combinations and the most expected combination of product components). These reference configurations are used for validation, using simulations (virtual tests) and physical tests. Only when these tests verify that the overall design is acceptable, the product will reach the corresponding approvals.


Following the approval, the product data (represented by a Super-BOM ideally with technical constraints captured by the engineering team) is passed to Oracle E-Business Suite and downstream processes. These processes include the definition of detailed configuration rules and the production planning.

The process integration for variant management integrates Agile PLM with Oracle E-Business Oracle Configurator (CZ) and enables Agile PLM users, by using Oracle Configurator, to view different User Interfaces (UIs), created for the same Bills of Material (BOM) model, based on the user login or profile. Oracle Configurator

Developer (OCD) responsibility helps the user to define rules, customize the UI, and then publish the UI based on different parameters such as application, usages, and effective dates.

[Figure 9-1](#) illustrates the cross-application integration process for the Variant Management solution:

**Figure 9-1 Integration process flow**

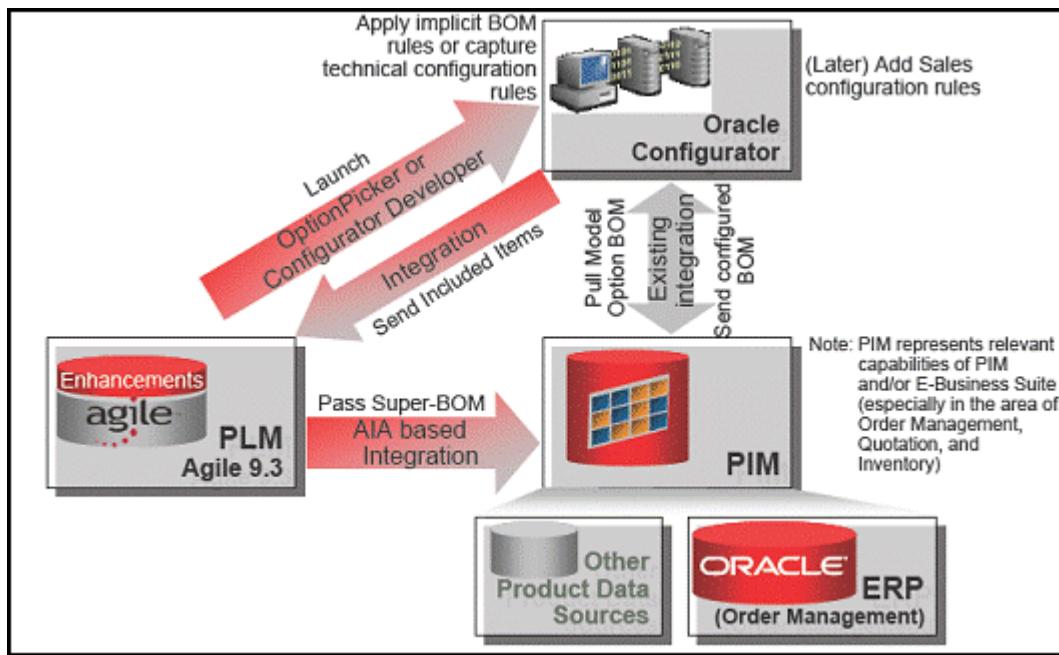

The variant management process integration consists of the following flows:

1. Agile PLM to Oracle PIM:
  - New Part Request (Model, Option Class, and Standard)
  - Transfer pre-release prototype items (model, option class, and standard)
  - Release or transfer (Prototype) super BOM through ECO
  - Release super BOM through ECO
2. Oracle PIM to Agile PLM:
  - Oracle change order implementation information to Agile PLM (Event based and batch)
  - Oracle item operational attributes to Agile PLM (Batch)
3. Agile PLM to Oracle Configurator:
  - Generate instance BOM using Option Picker

This chapter focuses on the Agile PLM to Oracle Configurator integration flow. Other flows are discussed in the previous chapters. It also discusses the additional attributes needed for variant management in the other integration flows.

For more information about Oracle Generic Configurator User Interface, see *Oracle Configurator Implementation Guide*.

## 9.2 Variant Management Process Integration

The following high-level process steps illustrate how a typical variant management process spans multiple applications and how it is supported by this process integration:

1. Model, option class, and standard items are defined in Agile PLM

In order to support the variant management process integration, the new part request (NPR) and the item synchronization process integrations described previously, include model and option class item types.

2. The Super-Bills of Material (BOM) is defined in Agile PLM
3. A pre-release version of the Super-BOM is passed to Oracle E-Business PIM, through this process integration, for the initial creation of the corresponding Model/Option (M/O) BOM.

In Agile PLM, a change order is created for the Model Option BOM. The change order release process supports Agile PLM items and the Variant Management sub-items model and option class, and their attributes: Minimum, Maximum, Optional, and Mutually Exclusive.

After releasing the BOM model into Oracle E-Business Suite, the change order must be implemented in Oracle E-Business Suite before importing into CZ. The released change order status is set to Implemented in Oracle E-Business Suite. The Oracle Generic Configurator User Interface can display only those BOM items that are set to Implemented.

4. The Oracle Configurator Option Picker servlet from Agile PLM, providing required parameters for the Configurator to retrieve the appropriate M/O BOM from PIM, is launched.
5. User logs in to OptionPicker if called the first time during this Agile PLM session.
6. The Configurator pulls the latest version of M/O BOM (including implicit BOM rules) from PIM into its own cache

The BOM model is imported into Oracle Configurator Developer in Oracle E-Business Suite using the Populate Configuration Models concurrent program.

7. User selects the desired options and enters quantities in the Option Picker.
  - Once the BOM Model is imported into Oracle Configurator Repository, the user can define the rules on the model and its components, create a UI using the seeded templates or custom templates, and publish the created UI to Agile PLM.
  - While publishing the UI to Agile PLM, the user must select the custom application from the list of available applications and set the publication look up mode and usage as required. During a UI launch from Agile PLM, the values in profiles 'CZ: Publication Lookup Mode' and 'CZ: Publication Usage' decide which UI to launch, if multiple UIs are published to Agile PLM with different publication lookup modes and usages.
  - The options picked by the user are populated in Agile PLM as an Instance BOM.
  - After the user completes the configuration of the Instance BOM and clicks Finish, a termination message (containing the configuration data) is returned from Oracle E-Business Suite to a servlet in AIA.

8. The Configurator passes the picked items to Agile PLM through this process integration to create an Instance-BOM configuration in Agile PLM
  - The servlet in the Enterprise Business Service (EBS) Application Business Connector Service (ABCS) transforms the termination message to SyncBillOfMaterialsConfigurationListABM.
  - SyncBillOfMaterialsConfigurationListABM is then transformed into SyncBillOfMaterialsConfigurationListEBM.
  - The enterprise service routes the configuration as SyncBillOfMaterialsConfigurationListEBM to SyncBillOfMaterialsConfigurationListAgileProvABCSImpl.
  - SyncBillOfMaterialsConfigurationListAgileProvABCSImpl converts SyncBillOfMaterialsConfigurationListEBM to ABM and sends to the Agile PLM Configurator Termination Web service.
  - A notification is sent to the user in Agile PLM when an instance BOM is derived from the Configurator or if an error occurs. To receive this notification, users need to modify the settings in the Agile PLM Java client.

For more information about the termination message, see *Oracle Configurator Developer's User Guide*.

For more information, see *Oracle Configurator Developer's User Guide*.


---

**Note:** The Agile PLM termination Web service can derive an instance BOM only for BOM items, which are transferred through the Design to Release Process. The instance BOM cannot be derived for BOM items that have not been transferred from Agile PLM.

---

9. The Instance BOM is tested and processed for cost and compliance validation and further modifications
10. A new version of the Super-BOM is generated and synchronized with the corresponding M/O BOM in PIM.
11. Steps 3-9 are repeated iteratively until a production revision of the Super-BOM is created and released.

[Figure 9-2](#) illustrates the Launch Generic Configurator User Interface and Configure Model Option BOM with Generic Configurator User Interface.

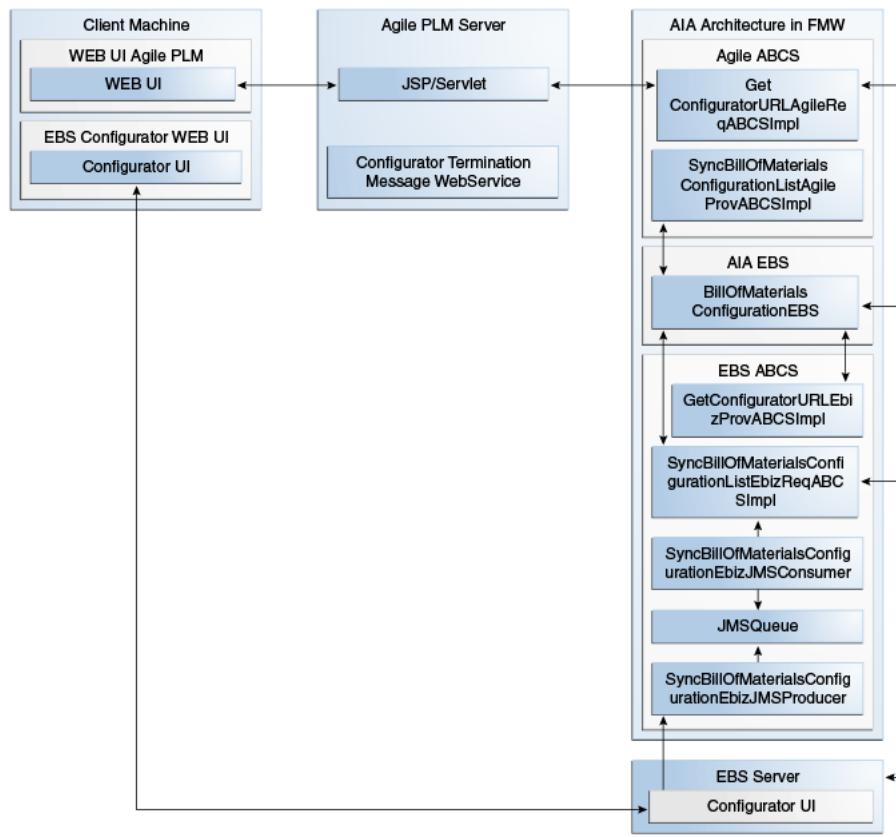**Figure 9–2 Architecture of Agile PLM Variant Management**


### 9.2.1 Exceptions


The following exception condition creates error messages for this integration process:

- An error message will be provided when the user clicks Launch Configurator button from Agile PLM (before CZ is actually launched). In this case, the error will be displayed in Agile PLM.

### 9.2.2 Variant Management Integration Services Orchestration

Figure 9–3 and Figure 9–4 illustrate the variant management option picker integration services orchestration:

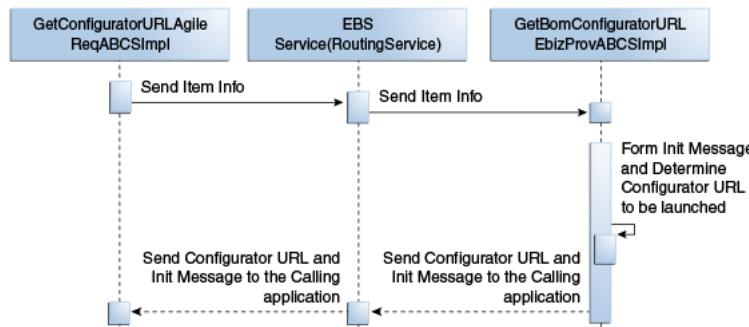**Figure 9–3 Option picker forward flow sequence diagram**

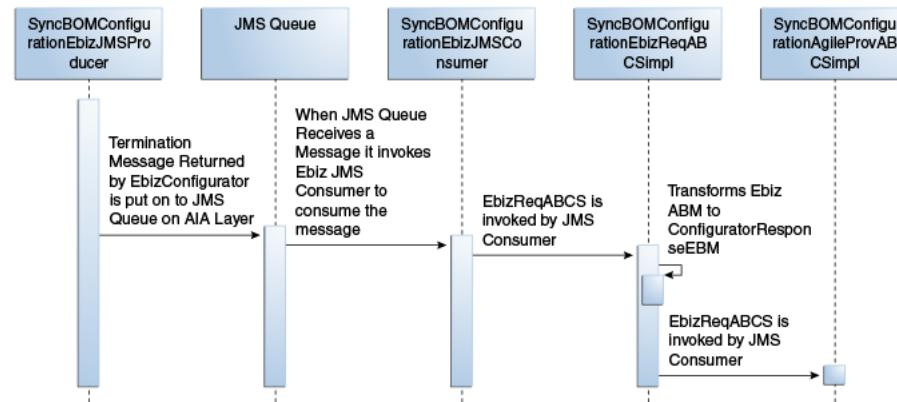**Figure 9–4 Option picker reverse flow sequence diagram**

**Table 9–1** lists the activities involved in the variant management integration services orchestration related to the option picker and Oracle Configurator:

**Table 9–1 Activities in Variant Management Integration Service**

Step	Activity	Remarks
1.	Invoke GetConfiguratorURL AgileReqABCSImpl process.	Launch the Oracle Configurator Option Picker servlet from Agile PLM. It invokes the process to obtain the Configurator URL.
2.	GetConfiguratorURL AgileReqABCSImpl invokes ConfiguratorURLEBS	An invoke activity in GetConfiguratorURLAgileReqABCSImpl transforms AgileGetConfiguratorURLABM into GetConfiguratorURLEBM. It also invokes ConfiguratorURLEBS.
3	GetConfiguratorURL EBS invokes GetConfiguratorURL EbizProvABCSImpl	ConfiguratorURLEBS send the GetConfiguratorURLEBM message as input into GetConfiguratorURLEbizProvABCSImpl.
4	GetConfiguratorURL EbizProvABCSImpl process forms initial message.	GetConfiguratorURLEbizProvABCImpl transforms GetConfiguratorURLEBM and forms the initial message needed to launch the Configurator UI. It determines the Configurator URL from the Oracle E-Business Suite Profile option.
5	GetConfiguratorURL EbizProvABCSImpl sends the response to ConfiguratorURLEBS	
6	ConfiguratorURLEBS sends the response to GetConfiguratorURL AgileProvABCSImpl.	GetConfiguratorURLAgileProvABCSImpl transforms the message into AgileGetConfiguratorURLRespABM with the Configurator URL and the Configurator UI is displayed.
7	User selects the options in the Configurator screen until the configuration process is complete.	

**Table 9–1 (Cont.) Activities in Variant Management Integration Service**

Step	Activity	Remarks
8	· Selecting Finish in the Configurator UI invokes SyncBillOfMaterialsConfigurationEbizJMS Producer.	This will send a termination message through the integration to the JMS Queue.
9	JMS Queue invokes SyncBillOfMaterialsConfigurationEbizJMS Consumer.	When the message is received in the queue, the process invokes the JMS Consumer and sends SyncBillOfMaterialsConfigurationListABM.
10	SyncBillOfMaterialsConfigurationListEbizReqABCSImpl receives SyncBillOfMaterialsConfigurationListABM and transforms it to SyncBillOfMaterialsConfigurationListEBM.	SyncBillOfMaterialsConfigurationListEbizReqABCSImpl receives SyncBillOfMaterialsConfigurationListABM and transforms it to SyncBillOfMaterialsConfigurationListEBM.
11	· BillOfMaterialsConfigurationEBS invokes SyncBillOfMaterialsConfigurationListAgileProvABCSImpl.	SyncBillOfMaterialsConfigurationListEBM transforms the ABM and returns the Super BOM and selected option information to Agile PLM through SyncBillOfMaterialsConfigurationListAgileProvABCSImpl.  <b>Note:</b> The SyncBillOfMaterialsConfigurationListAgileProvABCSImpl composite uses the oracle/wss_http_token_client_policy client security policy while calling ConfiguratorTerminationService hosted on the Agile server. The security credentials for this are stored in the csf-key AgileWebServicesKey on Fusion Middleware (FMW). The Agile username and password need to be setup correctly so that the Agile service is invoked successfully from the AIA composite in the FMW layer.

### 9.3 Solution Assumptions and Constraints

1. PIM and the Configurator have existing capabilities in the context, which are effectively leveraged that is the management of the Model/Option BOM in PIM and Oracle E-Business Suite and the OptionPicker in the Configurator.
2. The user will ensure successful transfer of the Super-BOM to PIM before attempting to access that version of the BOM in OptionPicker; Launch parameters will ensure the retrieval of the appropriate Model/option BOM from PIM,
3. Reconfigurations, copy, and delete will not be supported.

### 9.4 Agile PLM Interfaces

Table 9–2 lists the Agile PLM Web Services Definition Language (WSDL) files:

**Table 9–2 Agile PLM Web Services Definition Language (WSDL) files**

Interface	Description
GetConfiguratorURLAgileReqABCSImpl	
GetConfiguratorURLAgileReqABCSImplExtensionConcreteWSDL.wsdl	Used to service GetConfiguratorURLAgileReqABCSImpl

**Table 9–2 (Cont.) Agile PLM Web Services Definition Language (WSDL) files**

Interface	Description
GetConfiguratorURLAgileReqABCSImpl.wsdl	Used to service GetConfiguratorURLAgileReqABCSImpl
SyncBillOfMaterialsConfigurationListAgileProvABCSImpl	
ConfiguratorTerminationService.wsdl	Used as the AIA WSDL for Agile PLM VM ConfiguratorTerminationService
SyncBillOfMaterialsConfigurationListAgileProvABCSImplExtensionConcreteWSDL.wsdl	Used to service SyncBillOfMaterialsConfigurationListAgileProvABCSImpl

Table 9–3 lists the Agile PLM XML Schema Definition (XSD) files:

**Table 9–3 Agile PLM XML Schema Definition (XSD) files**

Interface	Description
GetConfiguratorURLAgileReqABCSImpl	
ConfiguratorABM.xsd	Contains the ABM definitions for Agile PLM VM
ConfiguratorABO.xsd	Contains the ABO definitions for Agile PLM VM
SyncBillOfMaterialsConfigurationListAgileProvABCSImpl	
ConfiguratorABM.xsd	Contains the ABM definitions for Agile PLM VM
ConfiguratorABO.xsd	Contains the ABO definitions for Agile PLM VM
ConfiguratorTerminationServiceTypes.xsd	Contains the local copy of the type definition for the Agile PLM VM ConfiguratorTerminationService

## 9.5 Oracle E-Business Suite Interfaces

Table 9–4 lists the Oracle E-Business Suite WSDL files:

**Table 9–4 Oracle E-Business Suite WSDL files**

Interface	Description
GetConfiguratorURLEbizProvABCSImpl	
GetConfiguratorURLEbizAdapter.wsdl	Used to service GetConfiguratorURLEbizProvABCSImpl
SyncBillOfMaterialsConfigurationListEbizReqABCSImpl	
SyncBillOfMaterialsConfigurationEbizJMSProcessor.wsdl	Used to service SyncBillOfMaterialsConfigurationListEbizReqABCSImpl
SyncBillOfMaterialsConfigurationEbizJMSConsumer.wsdl	Used to service SyncBillOfMaterialsConfigurationListEbizReqABCSImpl

## 9.6 Core AIA Components

Table 9–5 lists the core AIA components for this process integration:

**Table 9–5 Core AIA components**

Component	Name
EBOs	BillOfMaterialsConfigurationEBO
EBMs	GetConfiguratorURLEBM SyncBillOfMaterialsConfigurationListEBM

Table 9–6 lists the core components locations:

**Table 9–6 Core components locations**

Component	Location
EBO and EBM XSD files	\$AIA_HOME/AIAMetaData/AIAComponents/EnterpriseObjectLibrary/Core/EBO/ \$AIA_HOME/AIAMetaData/AIAComponents/ApplicationObjectLibrary/Ebiz/Release1/Core
WSDL files	\$AIA_HOME/AIAMetaData/AIAComponents/EnterpriseBusinessServiceLibrary/Core/EBO/ \$AIA_HOME/AIAMetaData/AIAComponents/ExtensionServiceLibrary/Ebiz \$AIA_HOME/AIAMetaData/AIAComponents/ApplicationConnectorServiceLibrary/Ebiz/V1

For detailed documentation of individual EBOs and EBMs, click the AIA Reference Doc link on EBO and EBM detail pages in Oracle Enterprise Repository.

EBOs can be extended, for instance, to add new data elements. These extensions are protected and will remain integral after a patch or an upgrade.

For more information, see *Oracle Fusion Middleware Concepts and Technologies Guide for Oracle Application Integration Architecture Foundation Pack 11g Release 1*, "Understanding Extensibility."

### 9.6.1 Oracle E-Business Suite and Agile PLM Components for Change Order Update

Table 9–7 lists the Oracle E-Business Suite and Agile PLM components for change order update:

**Table 9–7 Oracle E-Business Suite and Agile PLM components for change order update**

Services	Oracle E-Business Suite	Agile PLM
ABMs	SyncBillOfMaterialsConfigurationListABM	AgileGetConfiguratorURLABM AgileGetConfiguratorURLRespABM
ABCs	GetConfiguratorURLEbizProvABCImpl SyncBillOfMaterialsConfigurationListEbizReqABCImpl	GetConfiguratorURLAgileReqABCImpl SyncBillOfMaterialsConfigurationListAgileProvABCImpl
EBS	ConfiguratorURLEBS BillOfMaterialsConfigurationEBS	

Table 9–8 lists the core components locations:

**Table 9-8 Core components locations**

Component	Location
Application Business Objects, ABM and Common XSD files	\$AIA_HOME/AIA_MetaData/AIAComponents/ ApplicationObjectLibrary/Agile PLM/V1/schemas
	\$AIA_HOME/AIA_MetaData/AIAComponents/ ApplicationObjectLibrary/Ebiz/V1/schemas
	\$AIA_HOME/AIA_MetaData/AIAComponents/ ApplicationObjectLibrary/Ebiz/Release1/Core
WSDL files	\$AIA_HOME/AIA_MetaData/AIAComponents/ ApplicationObjectLibrary/Agile PLM/V1/wsdl
	\$AIA_HOME/AIA_MetaData/AIAComponents/ ApplicationObjectLibrary/Ebiz/wsdl
	\$AIA_HOME/AIA_MetaData/AIAComponents/ ExtensionServiceLibrary/Ebiz
	\$AIA_HOME/AIA_MetaData/AIAComponents/ApplicationConnectorServiceLibrary/Ebiz/V1

## 9.7 Integration Services

The integration services for the variant management process integration are:

- ConfiguratorURLEBS
- BillOfMaterialsConfigurationEBS
- GetConfiguratorURLAgileReqABCSImpl
- GetConfiguratorURLEbizProvABCSImpl
- SyncBillOfMaterialsConfigurationListEbizReqABCSImpl
- SyncBillOfMaterialsConfigurationListAgileProvABCSImpl

### 9.7.1 ConfiguratorURLEBS

The ConfiguratorURLEBS is the Enterprise Business Service (EBS) that exposes the operations related to obtaining Oracle Configurator URL.

The following list itemizes the routing rules:

- ConfiguratorURLEBS service
  - GetConfiguratorURL: Routes GetConfiguratorURLEBM to the GetConfiguratorURLEbizProvABCSImpl

### 9.7.2 BillOfMaterialsConfigurationEBS

The BillOfMaterialsConfigurationEBS is an EBS that exposes the operations related to terminating the Oracle Configurator and returning the Super BOM and selected option information to Agile.

The following list itemizes the BillOfMaterialsConfigurationEBS service routing rules:

- SyncBillOfMaterialsConfigurationList t: Routes SyncBillOfMaterialsConfigurationListEBM to SyncBillOfMaterialsConfigurationListAgileProvABCSImpl

### 9.7.3 GetConfiguratorURLAgileReqABCImpl

- This ABC service requests the Oracle Configurator URL from Oracle E-Business Suite. It can be used in Agile PLM to select the option information.
- The requester ABCS transforms AgileGetConfiguratorURLABM into GetConfiguratorURLEBM and invokes ConfiguratorURLEBS in order to obtain the Oracle Configurator URL.
- This service receives the response from ConfiguratorURLEBS with Oracle Configurator URL.

### 9.7.4 GetConfiguratorURLEbizProvABCImpl

- This ABC service forms the initial message needed to launch Oracle Configurator UI and determines the Configurator URL from the Oracle E-Business Profile Option BOM: Configurator URL of UI Manager.
- GetConfiguratorURLEbizProvABCImpl transforms GetConfiguratorURLEBM into Oracle E-Business ABM.
- GetConfiguratorURLEbizProvABCImpl sends a response to ConfiguratorURLEBS.

### 9.7.5 SyncBillOfMaterialsConfigurationListEbizReqABCImpl

This ABC service sends the terminate Oracle Configurator message.

- SyncBillOfMaterialsConfigurationListEbizReqABCImpl receives SyncBillOfMaterialsConfigurationListABM.
- SyncBillOfMaterialsConfigurationListEbizReqABCImpl transforms SyncBillOfMaterialsConfigurationListABM into the SyncBillOfMaterialsConfigurationListEBM.

### 9.7.6 SyncBillOfMaterialsConfigurationListAgileProvABCImpl

This ABC service sends the Super BOM and option information to Agile PLM.

- SyncBillOfMaterialsConfigurationListAgileProvABCImpl transforms SyncBillOfMaterialsConfigurationListEBM into Agile PLM's ABM.



# **Part II**

---

## **Implementing the Delivered Process Integrations**

[Chapter 10, "Configuring Process Integration for Agile PLM Oracle E-Business Suite"](#)



# Configuring Process Integration for Agile PLM Oracle E-Business Suite

This chapter includes the following sections:

- Setting up participating applications
- Identifying cross-references
- Populating cross-references
- Describing Domain Value Maps (DVMs)
- Setting configuration properties
- Setting up National Language Support (NLS)
- Handling errors
- Viewing Enterprise Business Objects (EBO) Implementation Maps (EIMs)

## 10.1 Setting Up the Participating Applications

Before integration, you must set up Agile Product Lifecycle Management (PLM) and Oracle E-Business Suite.

### 10.1.1 Setting Up Agile PLM

After installation of Agile PLM - Oracle E-Business Suite integration, the system administrator must setup Agile PLM Content Services (ACS).

The following set ups are required:

1. Create new destinations.
2. Create new events for engineering change order (ECO), manufacturing change order (MCO), and site change order (SCO).
3. Define filters.
4. Create new subscribers ECO, MCO, and SCO.
5. Set privileges.
6. Set up Agile item quantity attributes
7. Create auto number PX for NPR
8. Create action menu based PX for NPR
9. Create action menu based PX for Sync Item

10. Set up CHANGE\_STATUS table, if using workflow
11. Set up Agile notification
12. Variant Management: Enable Notification

These set ups are performed in the Agile PLM Java client.

#### 10.1.1.1 Create New Destinations

If Agile PLM is deployed on Oracle Application Server (OAS)

1. Copy the wlthint3client.jar file (this file is located at FMW's \$WLS\_HOME/Middleware/wlserver\_10.3/server/lib) put under the OAS j2ee\home\applib directory in the Agile PLM environment.
2. Bounce the Agile Oracle Application Server (OAS).
3. Restart the complete SOA.

For more information, see Quick Start Guide for Oracle SOA Suite, Starting and stopping servers.

If Agile PLM is deployed on the Weblogic server (WLS), no need to copy the wlthint3client.jar file, it should work fine as it is.

1. On the Admin tab, navigate to System Settings > Agile Content Service > Destinations.
2. Select Protocol JMS.
3. Enter or set the following essential values:

**Table 10–1 Setting for Configuring JMS**

Field	Value/Setting
Name	Define your own
Response Expected	No
User Name	weblogic (SOA server admin user name)
Password	weblogic#1 (SOA server admin password)
Provider Context Factory	weblogic.jndi.WLInitialContextFactory
Connection Factory	jms/aia/AIAAgilePLMECOCF
Default Provider URL	t3://<SOAServer>:<SOAServerPort>
Destination Name	jms/aia/AIAAgilePLMECOJMSQueue

---

**Note:** If you are pointing Agile to a clustered FMW environment, the Default Provider URL needs to contain all possible URLs in the cluster separated by a comma.

For example,  
*t3://<SOAServer1>:<SOAServerPort1>,<SOAServer2>:<SOAServerPort2>*

---

4. Click **Test** to validate.

### 10.1.1.2 Create New Events for ECO, MCO, and SCO

**Note:** Create separate Events for CO Release and CO Validation.

1. In the Admin tab, go to System Settings > Agile Content Service > Events.
2. Enter or set the following:

**Table 10-2 Values for Creating New Events for ECO, MCO, and SCO**

Field	Value/Setting		
	For ECO	For MCO	For SCO
Name	Define your own		
Event Type	Workflow		
Workflow	Default Change Order	Default Manufacturer Orders	Default Site Change Orders
Workflow Status	For CO Release Process - Released  For CO Validation Process - Any status other than Released. Preferred status is Submitted.		

### 10.1.1.3 Define Filters

1. In the Admin tab, go to System Settings > Agile Content Service > Filters.
2. Modify Default Item Filter to set the following:

**Table 10-3 Values for Defining Default Item Filters**

Field	Value/Setting
View Tabs	Add Sites, Title Block, Page Two, Page Three, BOM, Manufacturers
BOM Options	Tabs and Items
BOM Levels	Select All Levels check box
AML Options	Tabs and Manufacturer Parts
Attachment Options	Tab only

3. Modify the following filters to set the given fields:

**Table 10-4 Values for Modifying Filters**

Field	Value/Setting		
	For ECO	For MCO	For SCO
Filter	Default Change Order Filter	Default Manufacturer Order Filter	Default Site Change Order Filter

**Table 10–4 (Cont.) Values for Modifying Filters**

View Tabs	Page Two, Attachments, Page Three, Affected Items, Cover Page	Page Two, Attachments, Page Three, Affected Items, Cover Page	Page Two, Attachments, Page Three, Affected Items, Cover Page
Affected Items Options	Tab & Items	Tabs & Items	Tabs & Items
Redline Changes only	No	No	No

#### 10.1.1.4 Create New Subscribers for ECO, MCO, and SCO

**Note:** Create separate Subscribers for CO Release and CO Validation.

1. In the Admin tab, go to System Settings > Agile Content Service > Subscribers.
2. Create new Subscribers, one each for ECO, MCO and SCO, and set the following:

**Table 10–5 Values for Creating New Subscribers**

Field	Value/Setting		
	For ECO	For MCO	For SCO
Name	Define your own		
Subclass	ATO		
Workflow	Default ATOs		
Criteria	All Change Orders	All Manufacturer Orders	All Site Change Orders
AutoNumber	ATO Number	ATO Number	ATO Number
Event	Select the Name of the Event that you created #2 for ECO	Select the Name of the Event that you created #2 for MCO	Select the Name of the Event that you created #2 for SCO

3. Enter or set the Subscriber Details for each (ECO, MCO, SCO), by adding a new row, as follows:

**Table 10–6 Values for Setting Up Subscriber Details**

Field	Value/Setting		
	For ECO	For MCO	For SCO
Destinations	Select the JMS Destinations that you created for each		
Filter	Default Change Order Filter	Default Manufacturer Order Filter	Default Site Change Order Filter
	Default Item Filter	Default Item Filter	Default Item Filter
Roles	All		
Format	aXML		
Language	English		
Site	All		

4. Enable all the newly created Subscribers.

#### 10.1.1.5 Set Privileges

1. In the Admin tab, go to User Settings > Privileges > Modify.
2. Create new Modify Privileges for ECO, MCO, and SCO.
3. Set privilege to Modify.
4. Select the Criteria that correspond to each ECO, MCO, and SCO.
5. Select all the Attributes, including the invisible/disabled attributes in the Applied to field and Save them.
6. In the Where Used tab, add Roles to all the created privileges. Default role is Admin user.
7. Create new Read privileges for MCO.
8. Select All Manufacturer Orders in the Criteria.
9. Choose both visible and invisible/disabled attributes in the Applied to field.
10. Modify the Read Changes and Read Items to get the Admin user in the Where Used tab.

---

**Note:** The user should have privileges to modify the 'released' items and 'released' changes.

---

#### 10.1.1.6 Create New Read Privileges for MCO

1. In the Admin tab, go to User Settings > Privileges > Read.
2. Create new Modify Privileges for ECO, MCO, and SCO.
3. Set privilege to Read.
4. Set Enabled to Yes and Privilege to Modify.
5. Select All Manufacturer Orders in the Criteria.
6. Choose both visible and invisible/disabled attributes in the Applied to field.
7. Modify the Read Changes and Read Items to get the Admin user in the Where Used tab.

---

**Note:** The user should have privileges to modify the 'released' items and 'released' changes.

---

#### 10.1.1.7 Set Up Agile Item Quantity Attributes

1. In the Admin tab, go to Data Settings > Classes.
2. For both Parts and Document classes under items, enable the flexfields on Page2, Page3 or Site tab according to the MultiSite\_Enabled property value in the AIAConfigurationProperties.xml file, located at AIA\_HOME>/aia\_instances/\$INSTANCE\_NAME/AIAMetaData/config, for the Agile PLM module.
3. Go to User Interface Tab to select Sites or Page 2.
4. These field names in Agile reflect the following fields from the Oracle E-Business Suite:

- Manufacturer Cost
- Available Quantity
- On Hand Quantity
- Reserved Quantity

5. The values of these fields should be the same as those entered for the following properties:

- Item.UnitCostAttribute
- Item.AvailableQuantityAttribute
- Item.OnHandQuantityAttribute
- Item.ReservedQuantityAttribute

6. Set the created fields to Visible on the General Tab:

---

**Note:** Ensure that these attributes have Read and Modify privileges.

---

7. Similarly, enable a Page2 or Page3 flex field on the ECO, MCO, and SCO to reflect Change.TransferStatusAttribute property value in the AIAConfigProperties.xml file.

Oracle recommends that this field:

- Should be a Page Two field on the change orders, manufacturer orders, and site change orders classes.

The field should have the same display name on all three classes.

- Have a default value of Not Processed.
- Should be editable only by the user of the ID used by the integration to log in to Agile PLM, and be editable for all status (if the change is not released after its initial release).

If a value is not specified for this parameter, the implication is that a status update back to a change order flex-field in Agile PLM is not required

The field identified by this parameter will also be used by the integration to update the change implementation status into Agile PLM.

#### 10.1.1.8 Create Auto Number Process Extensions for NPR

---

**Note:** Create separate Auto Number PX each sub class with appropriate names. This is used to identify the sub class for which a particular Auto number PX is triggered.

---

1. In the Admin tab, go to Data Settings > AutoNumbers.
2. Click **Create** to create auto numbers for a subclass.
3. Enter the following fields in the Define the AutoNumber screen.
  - Enter name for AutoNumber.
  - Choose Yes for Enabled.
  - Choose Custom for Type.

- Choose the Part subclass name for Where Used.
- Choose com.oracle.aia.npr.V2.NPRAutoNumber for Custom AutoNumber.
- Click **OK**.

4. Navigate to Admin > Data Settings > ProcessExtensions.

#### 10.1.1.9 Create Action Menu Based Process Extensions for NPR

1. In the Admin tab, navigate to Data Settings > Process Extensions.
2. Click **Create** to create the process extension.
3. Enter the following details in the Define the AutoNumber screen:
  - Enter name as NPR Number
  - Choose Internal Custom Action for Type.
  - Choose com.oracle.aia.npr.V2.UpdateNPRNumber for Internal Custom Action.
  - Select Actions Menu from the Initiate From field.
  - Choose Yes for Enabled.
  - Click **OK**.
4. Navigate to Admin > Data Settings.
5. Double click Classes.
6. Double click Items in the Classes window.
7. Navigate to the Process Extensions tab.
8. Click **Open** to open the Assign Process Extensions window.
9. Select NPR Number from the choices.
10. Click **OK**.

#### 10.1.1.10 Create Action Menu Based Process Extensions for Sync Item

1. In the Admin tab, navigate to Data Settings > Process Extensions.
2. Click **Create** to create the process extension.
3. Enter the following details in the Add Process Extensions window:
  - Enter name as Sync Item.
  - Select Internal Custom Action for Type.
  - Select com.oracle.aia.syncitem.SyncItem for Internal Custom Action.
  - Select Actions Menu from the Initiate From field.
  - Select Yes for Enabled.
  - Click **OK**.
4. Navigate to Admin > Data Settings.
5. Double-click Classes.
6. Double-click Items in the Classes window.
7. Navigate to the Process Extensions tab.
8. Click **Open** to open the Assign Process Extensions window.

9. Select Sync Item from the choices.
10. Click OK.

#### 10.1.1.11 Set up Change\_Status Table for Workflow

Because the change status name depends on the workflow being used, the CHANGE\_STATUS configuration table is provided as part of the integration setup. The CHANGE\_STATUS table is located in the AIA schema created on the Service-Oriented Architecture (SOA) server. The default user ID is plmpip. The password will be the same password that the customer has setup for the FP AIA database. This value is the same as the property fp.db.aia.password, which can be found in the AIAInstallProperties.xml file. The DB details, such as URL, port, server ID, and so on can be found in the AIAInstallProperties.xml file at <AIA\_INSTANCE>/config/AIAInstallProperties.xml.

This table allows the administrators to specify the next status for each possible combination of change object type and the workflow being used for each event that qualifies for the change status operation. The administrators can add as many rows as required. The number of sub-classes of change objects and the number of workflows is unlimited in Agile PLM.

Table 10-7 illustrates how a partially configured table looks:

**Table 10-7 Partially Configured Change Status and Workflow Table**

EVENT	OUTCOME	SUBCLASS	WORKFLOW	NEXT_STATUS
Change Implemented	SUCCESS	ECO	Default Change Orders	Implemented

In a new installation, this table will be empty. The integration administrator must add rows in this table if the change status process must be supported for any of the given processes.

- The EVENT column key is **Change Implemented**.
- The OUTCOME column key is **SUCCESS**.
- In the SUBCLASS column, set up the change order subclass as ECO, MCO, etc.
- In the WORKFLOW column, set up the workflows. For example, if you are using Default Change Order workflow for ECO, then enter Default Change Order in this column. These values can be picked up from Agile PLM Java client.
- In the NEXT\_STATUS column, enter the status of the workflow you want it to move to when the conditions are met. For example, when a Change is implemented (identified by event - this is a key, do not change it) and the OUTCOME is SUCCESS (identified by outcome, gets checked while changing status here), and the WORKFLOW chosen is Default Change Orders, the set up requesting the Change to be moved to the Implemented status (NEXT\_STATUS).

#### 10.1.1.12 Set Up Agile Notifications

Notifications can be setup in Agile PLM to send email when any error occurs during ACS processing in the change order release process integration flow.

To set up the notifications:

1. Log in to Agile Java Client.
2. In the Admin tab, navigate to System Settings > Agile Content Service > Destinations.

3. Open the destination that was configured for the change order release flow to send the data to the JMS queue.
4. In the Notification User field, add the users and user groups who need to be notified on failure of ACS transfer.
5. Save the changes.

#### **10.1.1.13 Variant Management: Enable Notification**

1. In the Admin Tab, go to Server Settings > Database.
2. In the Notification Enabled field, select Yes.
3. Navigate to System Settings > Notifications.
4. In the Filter By field, select Name.
5. In the Value field enter Part.
6. Click **Apply**.
7. Open Parts - Part Send.
8. In the Notification Type field, select Inbox.
9. In the Enabled field, select Yes.

The following settings are user specific settings.

1. Go to User Settings > Privileges > Send.
2. In the Filter By field select Name.
3. In the Value field, enter Send Item.
4. Click **Apply**.
5. Open Send Items.
6. In the Enabled field, select Yes.

The current user has to have a role assigned that contains the privilege 'Send Item'.

7. Navigate to User Settings > Users.
8. Make sure the current user has roles assigned to him that contain the privilege Send Item.

#### **10.1.1.14 Modify the Read Item Privilege:**

Applies to Agile versions prior to 9.3.1 only.

1. Go to Admin > User Settings > Privileges > Read.
2. Search on Read Items.
3. Once Read Items is displayed, drill into it.
4. In the **Applied to** field, deselect the **Show Visible Attributes Only**.
5. Drag **Items.Relationships.Relationships.Type** to the **Selected** column
6. Click OK, and Close.

#### **10.1.1.15 Create New Privilege for Modify:**

Applies to all Agile versions.

1. Go to Admin > User Settings > Privileges > Modify.

2. Create a new privilege for Modify called Modify Model. Use the first icon on the top left.
3. Set Enabled to Yes and Privilege to Modify.
4. For the Privilege Criteria column, select All Models. If you cannot find All Models, create an All Models criteria by using the second icon next to the Criteria field.
5. Once the Criteria is complete, go to the **Applied to** field icon and deselect the box at the bottom.
6. Drag all choices to the **Selected** column.
7. Click OK, and Close.

#### **10.1.1.16 Update Read Users Privilege**

Applies to all Agile versions:

1. Go to Admin > User Settings > Privileges > Read > Read Users
2. In the Applied To field, drag over to the Select column **users.Preferences.BOM Variant Configuration Preference**.
3. Click OK and close.

For more information, see *Agile PLM Content Service User Guide and Agile Product Lifecycle Management Administrator Guide*.

#### **10.1.1.17 Update or Modify Users Privilege**

Applies to all Agile versions:

1. Go to Admin > User Settings > Privileges > Modify > Modify Users
2. In the **Applied To** field, make sure that the **users.Preferences.BOM Variant Configuration Preference** value is in the Select column. If not, drag it to the appropriate location.
3. Click OK and close.

For more information, see *Agile PLM Content Service User Guide and Agile Product Lifecycle Management Administrator Guide*.

#### **10.1.1.18 Create New Role for VM**

Applies to all Agile versions:

1. Go to Admin > User Settings > Settings > Roles
2. Enter a name.
3. Set Enabled to Yes and Privilege to Modify.
4. Specify User/Groups = Search for Administrator/admin and drag that to the right side column.
5. Click OK and close.

#### **10.1.1.19 Modify the Newly Created VM Role**

Applies to all Agile versions:

1. Go to Admin > User Settings > Settings > Roles
2. Go to the newly created VM role.
3. Select the Users tab and go into the user that has Administrator as the last name.

4. In the General Info tab, enter a name and an email address.
5. Save.

If you are using Oracle Configurator:

1. Go into the Preferences tab.
2. For the BOM Variant Configuration Preference, select **External Configurator**.
3. Click OK and close.
4. Modify the Agile server using the web client:
  - Using the remote desktop, logon to the Agile server with the proper credentials.
  - 2 agile.properties file need to be modified with the SOA\_host/port in the following locations:
    - <AGILE\_DOMAIN>\config\agile.properties
    - <SOA\_HOME>\j2ee\home\applications\Agile\APP-INF\classes\agile.properties
  - In each file, search for: **aia.cfg.endpoint.getURL** and modify the line by replacing the tokens for SOA\_HOST, SOA\_PORT and the variable for the Configurator with the valid values as shown in the example below:
    - aia.cfg.endpoint.getURL=http://adcxxxxxfems.us.oracle.com:xxxx/orabpel/default/GetConfiguratorURLAgileReqABCSImp1
  - Restart the Agile server.
    - If the Agile server is on OAS, use the commands from the <SOA\_HOME>/opmn/bin directory
 

For Linux (x86), Solaris SPARC (64-bit), IBM AIX Based Systems (64-bit), and HP-UX 11i (64 bit)

```
./opmnctl.exe stopall
./opmnctl.exe startall
```

For Microsoft Windows (32-bit)

```
opmnctl.exe startall
opmnctl.exe stopall
```
    - If the Agile server is on Weblogic, see the Agile Product Lifecycle Management Installing Oracle for WebLogic Server Guide.

After you are done setting up Variant Management on the Agile side, additional set up must be completed on the Ebiz side. Refer to [Section 10.1.2, "Setting Up Oracle E-Business Suite"](#) to complete the E-business setups.

For more information, see *Agile PLM Content Service User Guide* and *Agile Product Lifecycle Management Administrator Guide*.

## 10.1.2 Setting Up Oracle E-Business Suite

This section includes the following topics:

- Profile settings

- Oracle Configurator setup

### 10.1.2.1 Profile Settings

Table 10-8 lists the profile option settings that need to be configured for Oracle E-Business Suite to support the integration flow from Oracle E-Business Suite to Agile PLM:

**Table 10-8 Oracle E-Business Suite Profile Settings**

Setting	Description
BOM:Configurator URL of UI Manager	Configurator URL
CZ: Publication Lookup Mode	For Variant Management, set this profile option to define the desired publication look up mode. During a UI launch from Agile, the values in this profile decide which UI to launch, if multiple UIs are published to Agile PLM with different publication lookup modes and usages.
CZ: Publication Usage	For Variant Management, set this profile option to define the desired publication usage. During a UI launch from Agile, the values in this profile decide which UI to launch, if multiple UIs are published to Agile PLM with different publication lookup modes and usages.
EBS Integration Batch Count	Many entities (items or ECO) will be sent out in buckets based on the number that is set in this profile option. For example, if the reverse flow from Oracle E-Business Suite to Agile PLM has 22 items to be synched up based on this many items having been updated since the last run of the concurrent program and the profile has been set to 10, then 3 BPEL instances will be created to send out 10 + 10 + 2 items. If too many items have been updated after the last run, then BPEL may not be able to handle a very large payload causing memory issues. To prevent this, Oracle has introduced this profile. In such cases, the batch is split and sent.
EBS Integration Debug Directory	This profile option has VALUE as the path where the log file will be generated. This folder or directory should have read and write permission.
EBS Integration Debug Option	This profile option enables and disables logging. If the value is yes, then logging is enabled; if no, then it is disabled.
EBS Integration Language Codes	This profile option is used for returning the user language code through a concurrent program to the requestor BPEL process for identifying the integration user based on the language code received. Depending on this language code, APPS Context is set for that particular integration user and Oracle E-Business Suite will return the data in that particular language to Agile PLM.
EBS Integration: PIM Spoke Source System Name	This profile option is used for specifying multiple source systems based on which items will be filtered and updated back to Agile PLM. This source system should be a comma-separated value.
EBS Integration Proxy Server Host	Set it to the <SOA server /host name/>.
EBS Integration Proxy Server Port	Set it to the <SOA server http /port number/>.
EBS Integration: Server Endpoint URL	Endpoint of Managed SOA server on Fusion Middleware (FMW). For example, <code>http://&lt;host&gt;:&lt;port&gt;/soa-infra/services/default</code>
ENG: Require Revised Item New Revision	This profile indicates whether it is mandatory to assign a new revision to revised items on Oracle E-Business Suite ECOs. A blank (or "null") value is equivalent to No. This profile option should be set to No for the change order release process.

**Table 10-8 (Cont.) Oracle E-Business Suite Profile Settings**

Setting	Description
EBS profile option: EGO: Enable Stats Collection	For Agile-EBS integration to work, this profile option must be disabled.

**Note:** If the ECO update is event based, then setup for Subscribers and Events has to be done.

To navigate to the profiles interface:

1. Log in to the application with sysadmin credentials.
2. Navigate to System Administrator > responsibility.
3. Select System > Profile.
4. Search for the profiles given in the table and set the values.

For more information about the concurrent programs, see *Oracle E-Business Suite Developer's Guide* and *Oracle E-Business Suite System Administrator's Guide - Maintenance*.

### 10.1.2.2 Oracle Configurator Setup

To use the Variant Management with Oracle Configurator, you will need to create a custom application in Oracle E-Business Suite (for example, Agile\_PLM), which would be a onetime job during this integration. From then, for every BOM model to be launched using the Configurator UI from the Agile UI, the flow is to have the model structure released from Agile PLM to Oracle E-Business Suite and import the model into Oracle Configurator Developer. If required, create certain rules and UI for the model and publish the UI from Oracle Configurator Developer to the newly created custom application. This would make the Configurator UI available for Agile PLM users.

Creation process of a custom application in Oracle E-Business Suite includes:

1. Log in to Oracle E-Business Suite as a user with the Application Developer responsibility.
2. Navigate to Application Developer > Application > Register function.
3. Provide the values for Application, Short Name, Basepath, and Description. For example, Agile\_PLM, APLM, APLM\_TOP, and Agile Integration with Configurator respectively.
4. Save.

When saved, the application details like application\_id can be fetched from database using the query:

```
SELECT * From fnd_application_v1 WHERE application_short_name = 'APLM';
```

5. After obtaining the application\_id for the application created in this step, update the property CONFIGURATOR\_APPLICATION\_ID under the GetConfiguratorURLbizProvABCSImpl service in the AIAConfigurationProperties.xml file to reflect this new custom application.

For subsequent launches of the Oracle Configurator UI from Agile PLM, the application\_id set in this parameter will be passed in the initialization message to Oracle Configurator.

6. To make this application available for publishing a UI from Oracle Configurator (CZ) to Agile PLM, add it to the publication applicability list.

To do this, navigate to Oracle Configurator Administrator > Concurrent programs > Schedule and run the concurrent program Add Application to Publication Applicability List.

#### 10.1.2.3 Secured Access to APPS Schema

For more information about how to access the Oracle E-Business Suite APPS database schema without requiring sharing of the password for the APPS schema, see *Oracle E-Business Suite Software Development Kit for Java (includes AppsDataSource, Java Authentication and Authorization Service) Readme - Patch 9863609 (My Oracle Support document: 974949.1)*.

#### 10.1.2.4 Performance Considerations

Depending on the volume of transactions, an index can be created on the LAST\_UPDATE\_DATE column in the base tables CST\_ITEM\_COSTS, MTL\_SYSTEM\_ITEMS, and CST\_QUANTITY\_LAYERS, which will improve performance in the publish item and publish item balance flows originating from Oracle E-Business Suite.

### 10.1.3 Concurrent Programs Setup and Scheduling

Three flows from Oracle E-Business Suite to Agile PLM are scheduled for data to be sent at regular intervals. This is done by means of Oracle E-Business Suite concurrent programs (CP), which can be run at various intervals and scheduled with user interface options. The programs are:

- Publish Item Attributes Updates
- Publish Item Balance Updates
- Publish Engineering Change Order Updates

Concurrent programs are configured as a periodic or scheduled publication or triggered ad hoc for On-Demand publication.

#### 1. First Scheduled Run

When the concurrent program is scheduled, it sends all those entities that have been updated. However, for the very first run, the last run date is not available. Hence, it is defaulted to the last 30 days. This may result in an enormous number of items being picked up. Hence, the customer may choose to first perform an ad hoc publish (this is after the this integration is installed and a few items are transferred from Agile PLM to Oracle E-Business Suite based on the implementation).

In addition, specific organizations can be specified along with from date and to date in the ad hoc request parameters, from a performance perspective, to send the data in multiple requests. After this, the customer can set up a scheduled process and the first run of the scheduled process will pick up the ad hoc request run time as the last run date. Another option is that the customer can just schedule the request to be run with the Updated within the last X hours parameter set. This will pick up items, even for the first run, that have been updated in the last x hours.

#### 2. Subsequent Scheduled Run

Oracle recommends that you set the Updated in the last X hrs parameter with a default value for the concurrent programs that you set up to run at a schedule frequency. Specify this parameter value apart from the schedule frequency that is set up in the Concurrent Program setup. Oracle suggests that you set the same x hours for the Concurrent Program Schedule setup. Alternatively, you can leave all the parameters empty and schedule the concurrent program to run at a particular schedule frequency that you want.

### Concurrent Program Parameters

#### 1. Item/ECO names:

- The items/ECOs that are to be published should be entered separated by double semicolons.
- This is a text parameter of maximum length 240.

Examples:

ItemName1;;ItemName2;;ItemName3  
ChangeOrderName1;;ChangeOrderName2;; ChangeOrderName3

#### 2. Organization codes:

- Organization codes must be specified separated by double semicolons.
- This is a text parameter of maximum length 240.

Example1:

Item Names - Item1;;Item2;;Item3 Organization Codes - Org1;;Org2 If Item1 exists in Org1, Item2 in Org2 and Item3 in both Org1 & Org2 then, Items Published: Item1:Org1, Item2:Org2, Item3:Org1, Item3:Org2

Example2:

Organization Codes - Org1;;Org2 Updated in the last X Hrs - 10 Items/ECOs Published: Items/ECOs that got updated in the last 10 hours from Org 1 & Org2.

#### 3. From Date:

This is a standard date time parameter.

#### 4. To Date:

This is a standard date time parameter. This parameter should be entered only if the From Date parameter is given a value.

#### 5. Updated in the last X hrs:

This is a number parameter of maximum length 15. If this parameter is provided a value, then the From Date and To Date parameter values will not be considered.

### Supported Functionalities

#### 1. Scheduled request with no value provided to all parameters

Items/ECOs that were updated from the last completed or scheduled request will be picked for publication. The items/ECOs with errors from the previous run will not be automatically picked for the publication. All the items/ECOs with errors need to be published by using ad hoc CP request functionality and providing appropriate CP request parameters for such ad hoc requests.

#### 2. Ad hoc request with no value provided to any of the parameters

Oracle recommends that customers provide appropriate parameter values for the CP ad hoc requests. If no value is provided, then items/ECOs that were updated from the last completed or scheduled request will be published. If no scheduled requests are prior to the current request, then it will pick all the items/ECOs that were updated from the last completed request. If no completed requests are prior to the current one (first request of CP), then it will choose the data that was updated in the last 30 days.

### Expected Behaviors

**Table 10–9** lists the expected behavior of the requests based on the input values provided. A tick mark (x) implies that the values are specified, while a dash (-) implies they are not.

**Table 10–9 Expected Behavior of Requests**

Item/ECO Names	Organization Codes	From Date	To Date	Updated in last X hrs	Expected Items/ECOs to be published
x	-	-	-	-	Specified items/ECOs from all assigned Organization
-	x	-	-	-	Items/ECOs updated from the last completed request from the specified organization (If no last completed request then last 30 days). This is done in order to maintain the performance of the system.
-	-	x	-	-	Items/ECOs updated between the specified From Date and System Date from all Organizations
-	-	-	x	-	Error (From Date cannot be empty when to Date is specified)
-	-	-	-	x	Items/ECOs updated in the last X Hours from all organizations
x	x	-	-	-	Specified Items/ECOs from specified organizations if they exist
-	x	x	-	-	Items/ECOs updated between the specified From Date and System Date from specified organizations
-	x	-	-	x	Items/ECOs updated in the last X hours from specified organizations
x	-	x	-	-	Specified items/ECOs updated between the specified From Date and System Date from all assigned organizations
x	-	-	x	-	Error (From Date cannot be missing when To Date is specified)
x	-	-	-	x	Specified items/ECOs updated in the last X hours specified from all assigned organizations

**Table 10-9 (Cont.) Expected Behavior of Requests**

Item/ECO Names	Organization Codes	From Date	To Date	Updated in last X hrs	Expected Items/ECOs to be published
x	-	x	x	-	Specified items/ECOs updated between the specified From Date and To Date from all assigned organizations
x	-	x	x	x	Specified items/ECOs updated in the last X hours specified from all assigned organizations. The specified From Date and To Date will be ignored
x	x	-	x	x	Specified items/ECOs from specified organizations if they exist and are updated in the last X hours specified. The specified To Date will be ignored
x	x	x	x	x	Specified items/ECOs from specified organizations if they exist and were updated in the last X hrs specified. The specified From Date and To Date will be ignored

### On Demand/Ad Hoc

After the integration setup is complete, perform the following tasks:

**1. Initial publication of items and ECOs from Oracle E-Business Suite**

Run an ad hoc request specifying from date and to date. (If this is not done, the CP will pick all the items and ECOs that were updated in the last 30 days.) In addition, specific organizations can be specified along with from date and to date in the CP parameters, from a performance perspective, to send the data in multiple CP requests as part of Implementation setup.

**2. Periodic and scheduled publication of items and ECOs from Oracle E-Business Suite**

Oracle recommends that customers set the updates in the last X hrs parameter with a reasonable value for CPs that are being set up to run at a schedule frequency. This parameter value should be specified apart from the schedule frequency setup in the Concurrent Program setup. Oracle suggests that customers set the same X number of hours for the Concurrent Program Schedule setup (OR). Customers can leave all the parameters empty and schedule the CP to run at a particular schedule frequency that they desire.

**3. On Demand/Ad-hoc publication of items and ECOs from Oracle E-Business Suite**

The items and ECOs that failed during the scheduled run must be sent as separate ad hoc requests by specifying appropriate value to the parameters. The items and ECOs of the organizations that failed during the scheduled publication can be obtained from the log information to provide input parameters for the ad hoc concurrent request to synchronize the data between Oracle E-Business Suite and Agile PLM after resolving the reported publication error.

### 10.1.4 Setting Up Product Information Management Spoke Source System

Product Information Management (PIM) Spoke Source System setup must be done before you run the New Part Request (NPR) flow for Oracle E-Business Suite 12.1.x release. This setup is required so that after creation of an item in Oracle E-Business Suite, it can appear in the Association Tab of the source system.

---

**Note:** The PIM Spoke Source System setup is required if the integration is installed with the PIM option enabled.

---

For more information about how to set up the PIM Spoke Source System, see *Oracle Product Information Management Implementation Guide*, "Setting Up Inbound Product Data Synchronization and Data Quality Management," Defining Source Systems.

### 10.1.5 SQL Script for Loading Cross-Reference Records

There is no utility in 11g to load cross-reference records similar to 10g. However, this can be accomplished with an SQL script.

The following is an example of a SQL script that loads cross-reference records for the XRef table, ITEM\_ITEMID with columns AGILE\_01 and EBIZ\_01. This sample script allows you to build XREF records for a single item. You can modify this SQL script to suit your specific requirements.

```

DECLARE
  XrefTableName_vc2 VARCHAR2 (2000);
  XrefColumnName1_vc2 VARCHAR2 (2000);
  XrefColumnName2_vc2 VARCHAR2 (2000);
  XrefColumnName3_vc2 VARCHAR2 (2000);
  Value_vc2 VARCHAR2 (2000);
  RowNumber_vc2 VARCHAR2 (48);
  IsDeleted_vc2 VARCHAR2 (1);
  LastModified_ts TIMESTAMP (6);
BEGIN
  /* The following values need to be set just once per load*/
  XrefTableName_vc2 := 'oramds:/apps/AIAMetaData/xref/ITEM_ITEMID.xref';
  IsDeleted_vc2 := 'N';
  XrefColumnName1_vc2 := 'COMMON';
  XrefColumnName2_vc2 := 'AGILE_01';
  XrefColumnName3_vc2 := 'EBIZ_01';
  /* You'll just need to change the Value_vc2 variable for your specific edge app values */
  /* Row Number is unique to a group of three inserts and ties them together. Its a
  system generated guid in all cases */
  /* Copy this section as many times as needed for each set of three records you need
  inserted */

```

```

***** Begin set of 3 inserts
***** /
RowNumber_vc2 := SYS_GUID;
/* Common row should have a guid for its value */
Value_vc2 := SYS_GUID;
LastModified_ts := SYSTIMESTAMP;
Insert into XREF_DATA (XREF_TABLE_NAME, XREF_COLUMN_NAME, ROW_
NUMBER, VALUE, IS_DELETED, LAST_MODIFIED) values
(XrefTableName_vc2, XrefColumnName1_vc2, RowNumber_vc2, Value_vc2,
IsDeleted_vc2, LastModified_ts);
/* Value specific to each application, for Agile value generation please check XREF_
Instructions.doc */
Value_vc2 := 'AgileValue1';
LastModified_ts := SYSTIMESTAMP;
Insert into XREF_DATA (XREF_TABLE_NAME, XREF_COLUMN_NAME, ROW_
NUMBER, VALUE, IS_DELETED, LAST_MODIFIED) values
(XrefTableName_vc2, XrefColumnName2_vc2, RowNumber_vc2, Value_vc2,
IsDeleted_vc2, LastModified_ts);
/* Value specific to each application, for Ebiz value generation please check XREF_
Instructions.doc */
Value_vc2 := 'EbizValue1';
LastModified_ts := SYSTIMESTAMP;
Insert into XREF_DATA (XREF_TABLE_NAME, XREF_COLUMN_NAME, ROW_
NUMBER, VALUE, IS_DELETED, LAST_MODIFIED) values
(XrefTableName_vc2, XrefColumnName3_vc2, RowNumber_vc2, Value_vc2,
IsDeleted_vc2, LastModified_ts);
***** End of set of 3 inserts
***** /
END;

```

The following is an example of a SQL script that loads cross-reference records for the XRef table, CHANGE\_CHANGEID with columns AGILE\_01 and EBIZ\_01. You can modify this SQL script to suit your specific requirements.

```

DECLARE
XrefTableName_vc2 VARCHAR2 (2000);
XrefColumnName1_vc2 VARCHAR2 (2000);
XrefColumnName2_vc2 VARCHAR2 (2000);
XrefColumnName3_vc2 VARCHAR2 (2000);
Value_vc2 VARCHAR2 (2000);
RowNumber_vc2 VARCHAR2 (48);
IsDeleted_vc2 VARCHAR2 (1);
LastModified_ts TIMESTAMP (6);

```

```
BEGIN

/* The following values need to be set just once per load*/

XrefTableName_vc2 := 'oramds:/apps/AIAMetaData/xref/CHANGE_
CHANGEID.xref';

IsDeleted_vc2 := 'N';

XrefColumnName1_vc2 := 'COMMON';

XrefColumnName2_vc2 := 'AGILE_01';

XrefColumnName3_vc2 := 'EBIZ_01';

/* You'll just need to change the Value_vc2 variable for your specific edge app values
 */

/* Row Number is unique to a group of three inserts and ties them together. Its a
system generated guid in all cases */

/* Copy this section as many times as needed for each set of three records you need
inserted */

/***** Begin set of 3 inserts
***** /

RowNumber_vc2 := SYS_GUID;

/* Common row should have a guid for its value */

Value_vc2 := SYS_GUID;

LastModified_ts := SYSTIMESTAMP;

Insert into XREF_DATA (XREF_TABLE_NAME, XREF_COLUMN_NAME, ROW_
NUMBER, VALUE, IS_DELETED, LAST_MODIFIED) values

(XrefTableName_vc2, XrefColumnName1_vc2, RowNumber_vc2, Value_vc2,
IsDeleted_vc2, LastModified_ts);

/* Value specific to each application, for Agile value generation please check XREF_
Instructions.doc */

Value_vc2 := 'AgileValue1';

LastModified_ts := SYSTIMESTAMP;

Insert into XREF_DATA (XREF_TABLE_NAME, XREF_COLUMN_NAME, ROW_
NUMBER, VALUE, IS_DELETED, LAST_MODIFIED) values

(XrefTableName_vc2, XrefColumnName2_vc2, RowNumber_vc2, Value_vc2,
IsDeleted_vc2, LastModified_ts);

/* Value specific to each application, for Ebiz value generation please check XREF_
Instructions.doc */

Value_vc2 := 'EbizValue1';

LastModified_ts := SYSTIMESTAMP;

Insert into XREF_DATA (XREF_TABLE_NAME, XREF_COLUMN_NAME, ROW_
NUMBER, VALUE, IS_DELETED, LAST_MODIFIED) values

(XrefTableName_vc2, XrefColumnName3_vc2, RowNumber_vc2, Value_vc2,
IsDeleted_vc2, LastModified_ts);
```

```

/***** End of set of 3 inserts
***** /
END;

```

## 10.2 Identifying Cross-Reference Data

This integration uses the xref\_data table present in Application Integration Architecture (AIA) schema to maintain a cross-reference between Agile PLM and Oracle E-Business Suite. This cross-reference information helps map Agile PLM Parts/ Documents/ Change Orders to Oracle E-Business Suite Items/ Change Orders.

Two virtual tables in the AIA XREF schema's XREF\_DATA table maintain this cross-reference information.

1. CHANGE\_CHANGEID: maintains all the change order information.
2. ITEM\_ITEMID: maintains item information.

Example:

- A change order ECO001 contains two revised items:
  - P0001 in site V1
  - P0002 in site V2
- Both these revised items have component items:
  - P0001 has component items C0001 and C0002
  - P0002 has component items C0003 and C0004
- When this change order is released from Agile PLM to Oracle E-Business Suite, the following entries are made in the CHANGE\_CHANGEID virtual table:

**Table 10–10 Entries in CHANGE\_CHANGEID Virtual Table**

XREF_TABLE	XREF_COLUMN	ROW_NUMBER	VALUE
CHANGE_CHANGEID	AGILE_01	E45E015046AF11DD9F2E436FB3 9961A8	ECO001::V1
CHANGE_CHANGEID	COMMON	E45E015046AF11DD9F2E436FB3 9961A8	2d37383330323730313 2383837353631
CHANGE_CHANGEID	EBIZ_01	E45E015046AF11DD9F2E436FB3 9961A8	11075
CHANGE_CHANGEID	AGILE_01	E45E015046AF11DD9F2E436FB3 9961A9	ECO001::V2
CHANGE_CHANGEID	COMMON	E45E015046AF11DD9F2E436FB3 9961A9	2d37383330323730313 2383837353632
CHANGE_CHANGEID	EBIZ_01	E45E015046AF11DD9F2E436FB3 9961A9	11076

The CHANGE\_CHANGEID table is located at this location: \$AIA\_HOME/AIAMetaData/xref/CHANGE\_CHANGEID.xref

- The first row entry is made by the Agile PLM BPEL flow for change order ECO001. This change order belongs to an Agile PLM site that is mapped to site V1. The value entered is a concatenation of change order number and the Oracle E-Business Suite organization code (for example, CONumber::OrganizationCode).

- The second entry (Common) is also created by the Agile PLM BPEL flow. It indicates the common business component ID for this particular integration entity. It is used for linking change orders to Oracle E-Business Suite change orders.
- The third row entry represents the Oracle E-Business Suite Engineering Change Order ID corresponding to the item ECO001 and the organization ID for the Change Order (for example, ChangeOrderID::Organization\_Code).
- For each revised item and component items in the change order, entries are made into the ITEM\_ITEMID virtual table.

Example: For ECO001, the following entries will be made in the ITEM\_ITEMID table.

**Table 10-11 Entries in ITEM\_ITEMID Table**

XREF_TABLE	XREF_COLUMN	ROW_NUMBER	VALUE
ITEM_ITEMID	AGILE_01	0078BE703EC711DDBF9 CA7AA7FE3BDFB	P0001::V1
ITEM_ITEMID	COMMON	0078BE703EC711DDBF9 CA7AA7FE3BDFB	35313835373739353732383 638303435
ITEM_ITEMID	EBIZ_01	0078BE703EC711DDBF9 CA7AA7FE3BDFB	66247::204::<operating unit ID>
ITEM_ITEMID	AGILE_01	0078BE703EC711DDBF9 CA7AA7FE3BDFC	P0002::V2
ITEM_ITEMID	COMMON	0078BE703EC711DDBF9 CA7AA7FE3BDFC	35313835373739353732383 638303436
ITEM_ITEMID	EBIZ_01	0078BE703EC711DDBF9 CA7AA7FE3BDFC	66248::207::<operating unit ID>
ITEM_ITEMID	AGILE_01	0078BE703EC711DDBF9 CA7AA7FE3BDFD	C0001::V1
ITEM_ITEMID	COMMON	0078BE703EC711DDBF9 CA7AA7FE3BDFD	35313835373739353732383 638303437
ITEM_ITEMID	EBIZ_01	0078BE703EC711DDBF9 CA7AA7FE3BDFD	66249::204::<operating unit ID>
ITEM_ITEMID	AGILE_01	0078BE703EC711DDBF9 CA7AA7FE3BDFE	C0002::V1
ITEM_ITEMID	COMMON	0078BE703EC711DDBF9 CA7AA7FE3BDFE	35313835373739353732383 638303438
ITEM_ITEMID	EBIZ_01	0078BE703EC711DDBF9 CA7AA7FE3BDFE	66250::204::<operating unit ID>
ITEM_ITEMID	AGILE_01	0078BE703EC711DDBF9 CA7AA7FE3BDFF	C0003::V2
ITEM_ITEMID	COMMON	0078BE703EC711DDBF9 CA7AA7FE3BDFF	35313835373739353732383 638303439
ITEM_ITEMID	EBIZ_01	0078BE703EC711DDBF9 CA7AA7FE3BDFF	66251::207::<operating unit ID>
ITEM_ITEMID	AGILE_01	0078BE703EC711DDBF9 CA7AA7FE3BDFG	C0004::V2
ITEM_ITEMID	COMMON	0078BE703EC711DDBF9 CA7AA7FE3BDFG	35313835373739353732383 638303440

**Table 10-11 (Cont.) Entries in ITEM\_ITEMID Table**

XREF_TABLE	XREF_COLUMN	ROW_NUMBER	VALUE
ITEM_ITEMID	EBIZ_01	0078BE703EC711DDBF9 CA7AA7FE3BDFG	66252::207::<operating unit ID>

The ITEM\_ITEMID table is located at this location: \$AIA\_HOME/AIAMetaData/xref/ITEM\_ITEMID.xref

- The first row entry is made by the Agile PLM BPEL flow for part P0001. This part belongs to an Agile PLM site that is mapped to site V1. The value entered is a concatenation of part number and E-Business OrganizationCode (for example, Partnumber::OrganizationCode).
- The second entry (Common) is also created by the Agile PLM BPEL flow. It indicates the common business component ID for this particular integration entity. It is used to link Agile PLM Parts/ Documents/ Change orders to Oracle E-Business Suite Items/Change Orders.
- The third row entry represents the Oracle E-Business Suite inventory item ID corresponding to the item P1B and the organization ID for the item (for example, Inventory\_Item\_id::Organization\_id::Operating\_Unit\_Id). The rest of the entries represent the revised and component items for the ECO001.
- The ITEM\_ITEMID virtual table contains the similar cross-reference entries for each item and part created through the new part request process.

### 10.2.1 Creating Cross-Reference Data from Other Integrations

If data needs to be ported from other existing integrations to the Agile PLM integration, you should first establish the relationship between Agile PLM entities and Oracle E-Business Suite entities by inserting the relevant data in the xref\_data table.

Load the required integration data manually in the xref\_data table to establish the link between Agile PLM and Oracle E-Business Suite. This data will map the Agile PLM entities to the Oracle EBS entities as described in the previous section.

Even for existing Agile PLM integration integrations, if an item or change order needs to be created in Oracle E-Business Suite and then is created in Agile PLM, the cross-reference entry is made for the integration to process the item. All the update (reverse) flows for the integration will update the item attributes in Agile PLM if an entry exists in the xref\_data table for that particular item.

The data that has to be inserted in the xref\_data table can be retrieved by the following means:

- The value for the XREF\_TABLE column in the xref\_data table is oramds:/apps/AIAMetaData/xref/<xref-name>.xref, where xref-name is ITEM\_ITEMID or CHANGE\_CHANGEID.
- The change ID number that is inserted in the EBIZ\_01 column for a particular change order can be obtained by means of the following query:
 

```
select change_id from eng_engineering_changeswherechange_
notice=<AgileChangeOrder>
```
- The business component ID that is inserted in the COMMON column can be any unique number.

- The Agile PLM change order number and the Oracle E-business Suite organization corresponding to an Agile PLM site are inserted into the AGILE\_01 column separated by ":".
- The Item inventory number, the organization ID, and the operating unit ID are inserted in the EBIZ\_01 column separated by ":"
- The inventory item ID for a particular item can be obtained by means of the following query:
 

```
select inventory_item_id from mtl_system_items_bw where segment1='<AgileItem>'  
select organization_id from mtl_parameters where organization_code=<EbizOrgMappedtotheItemAgileSite>
```
- The organization ID for the given item can be obtained by means of the following query:
 

```
select organization_id from mtl_parameters  
where  
organization_code=<EbizOrgMappedtotheItemAgileSite>
```
- The business component ID that is inserted in the COMMON column can be any unique number.
- The operating unit ID for the given item can be obtained by means of the following query:
 

```
SELECT operating_unit FROM ORG_ORGANIZATION_DEFINITIONS orgdef, HR_OPERATING_UNITS hrou  
WHERE orgdef.organization_id = <Organization id of EbizOrgMappedtotheItemAgileSite> AND hrou.organization_id=orgdef.operating_unit;
```
- The Agile PLM item number and Oracle EBS organization corresponding to the Agile PLM site are inserted into the AGILE\_01 column separated by ":".

---

**Note:** Before you run the pre-built integration flows, the item revisions in Agile PLM and Oracle E-Business Suite should be synchronized after the manual data load is performed.

---

## 10.3 Populating Cross-References

If you want to perform an initial data load yourself, after the data load is performed in edge applications, then you must manually populate the ITEM\_ITEMID and CHANGE\_CHANGEID cross-reference (XRef) tables after installing and configuring the PIP.

You must manually add the cross-reference data into the ITEM\_ITEMID and CHANGE\_CHANGEID XRef tables by using SQL insert statements.

For each Oracle E-Business Suite item processed through initial loads, the following rows need to be created in the XRef data table:

- One row for Agile: AGILE\_01
- One row for Oracle E-Business Suite: EBIZ\_01
- One row for Common: COMMON

The physical XREF table (XREF\_DATA) can be located in the database configured for FMW/SOA and contains the following columns:

**Table 10–12 XRef Table Format**

Column Name	Description
XREF_TABLE_NAME	This column stores the XREF data types. For example: <ul style="list-style-type: none"> <li>▪ oramds:/apps/AIAMetaData/xref/ITEM_ITEMID.xref</li> <li>▪ oramds:/apps/AIAMetaData/xref/CHANGE_CHANGEID.xref</li> </ul>
XREF_COLUMN_NAME	This column stores the values indicating the edge applications and COMMON value: <ul style="list-style-type: none"> <li>▪ AGILE_01</li> <li>▪ EBIZ_01</li> <li>▪ COMMON</li> </ul>
ROW_NUMBER	This column stores the GUID.
VALUE	This column stores the actual data that is cross-referenced.
IS_DELETED	This column indicates whether the column is deleted or not. For example, 'N'.
LAST_MODIFIED	This column stores last modified time.

**Table 10–13 ITEM\_ITEMID XRef Table Value Format**

XRef_Column_Name	Value
COMMON	GUID
AGILE_01	Agile ItemID::Site For example, Part1::V1
EBIZ_01	Ebiz ItemID::Organization ID::Operating Unit ID For example, 60031::204::204

**Sample SQL Insert Statements for ITEM\_ITEMID Table:**

For EBIZ\_01:

```
INSERT INTO XREF_DATA (XREF_TABLE_NAME, XREF_COLUMN_NAME, ROW_NUMBER, VALUE, IS_DELETED, LAST_MODIFIED) VALUES (
oramds:/apps/AIAMetaData/xref/ITEM_ITEMID.xref ', 'EBIZ_01',
'BD618D40B30C11DEBFA5D9490F57512E ', '532922::204::204', 'N', SYSTIMESTAMP)
```

For AGILE\_01:

```
INSERT INTO XREF_DATA (XREF_TABLE_NAME, XREF_COLUMN_NAME, ROW_NUMBER, VALUE, IS_DELETED, LAST_MODIFIED) VALUES (
oramds:/apps/AIAMetaData/xref/ITEM_ITEMID.xref ', 'AGILE_01',
'BD618D40B30C11DEBFA5D9490F57512E', 'TM0101P::V1', 'N', SYSTIMESTAMP)
```

For COMMON:

```
INSERT INTO XREF_DATA (XREF_TABLE_NAME, XREF_COLUMN_NAME, ROW_NUMBER, VALUE, IS_DELETED, LAST_MODIFIED) VALUES (
oramds:/apps/AIAMetaData/xref/ITEM_ITEMID.xref ', 'COMMON ',
'BD618D40B30C11DEBFA5D9490F57512E', '2d373037303636323539363632323735', 'N',
SYSTIMESTAMP)
```

**Table 10-14 Sample Data for XRef ITEM\_ITEMID Table**

XRef_Table	XRef_Column	Row_Number	Value	IS_Deleted	Last_Modified
oramds:/a pps/AIA MetaData /xref/ITE M_ ITEMID.xref	EBIZ_01	BD618	532922 D40B3 0C11D EBFA5 D9490 F57512	N ::204::2 04 E	2012-4-11.11.29. 54. 210000000
oramds:/a pps/AIA MetaData /xref/ITE M_ ITEMID.xref	AGILE_01	BD618	TM010 D40B3 0C11D EBFA5 D9490 F57512	N 1P::V1 E	2012-4-11.11.29. 54. 210000000
oramds:/a pps/AIA MetaData /xref/ITE M_ ITEMID.xref	COMMON	BD618	2d3730 D40B3 0C11D EBFA5 D9490 F57512	N 373036 363235 393636 323237 35 E	2012-4-11.11.29. 54. 210000000

**Table 10-15 CHANGE\_CHANGEID XRef Table Value Format**

XRef_Column_Name	Value
COMMON	GUID
AGILE_01	Agile ItemID::Site For example, Part1::V1
EBIZ_01	Ebiz ChangeID For example, 60031

**Sample SQL Insert Statements for CHANGE\_CHANGEID Table**

For EBIZ\_01:

```
INSERT INTO XREF_DATA (XREF_TABLE_NAME, XREF_COLUMN_NAME, ROW_NUMBER, VALUE, IS_DELETED, LAST_MODIFIED) VALUES ('oramds:/apps/AIAMetaData/xref/CHANGE_CHANGEID.xref', 'EBIZ_01', 'C7D0C3D0740D11E1BFF50FA2D024BE6E', '92219', 'N', SYSTIMESTAMP)
```

For AGILE\_01:

```
INSERT INTO XREF_DATA (XREF_TABLE_NAME, XREF_COLUMN_NAME, ROW_NUMBER, VALUE, IS_DELETED, LAST_MODIFIED) VALUES ('oramds:/apps/AIAMetaData/xref/CHANGE_CHANGEID.xref', 'AGILE_01', 'C7D0C3D0740D11E1BFF50FA2D024BE6E', 'C00374::V1', 'N', SYSTIMESTAMP)
```

For COMMON:

```
INSERT INTO XREF_DATA (XREF_TABLE_NAME, XREF_COLUMN_NAME, ROW_NUMBER, VALUE, IS_DELETED, LAST_MODIFIED) VALUES ('oramds:/apps/AIAMetaData/xref/CHANGE_CHANGEID.xref', 'COMMON', 'C7D0C3D0740D11E1BFF50FA2D024BE6E', '2d383932333633343735363134363035', 'N', SYSTIMESTAMP)
```

**Table 10-16 Sample Data for CHANGE\_CHANGEID Table**

XRef_Table	XRef_Column	Row_Number	Value	IS_Deleted	Last_Modified
oramds:/a pps/AIA MetaData /xref/CH ANGE_CHANGEI D.xref	EBIZ_01	C7D0C 3D074 0D11E 1BFF5 0FA2D 024BE 6E	92219	N	2012-4-11.11.29. 54. 210000000
oramds:/a pps/AIA MetaData /xref/CH ANGE_CHANGEI D.xref	AGILE_01	C7D0C 3D074 0D11E 1BFF5 0FA2D 024BE 6E	C0037 4::V1	N	2012-4-11.11.29. 54. 210000000
oramds:/a pps/AIA MetaData /xref/CH ANGE_CHANGEI D.xref	COMMON	C7D0C 3D074 0D11E 1BFF5 0FA2D 024BE 6E	2d3839 323336 333437 353631 343630 35 6E	N	2012-4-11.11.29. 54. 210000000

## 10.4 Describing DVMs

DVMs are a standard feature of the Oracle SOA Suite. They enable you to equate lookup codes and other static values across applications, for example, FOOT and FT or US and USA.

DVMs are static in nature, though administrators can add additional maps as needed. Transactional business processes never update DVMs; they only read from them. DVMs are stored in XML files and cached in memory at run time.

DVM types are seeded for the Oracle Design to Release: Agile Product Lifecycle Management - JD Edwards EnterpriseOne flows and administrators can extend the list of mapped values by adding more maps. The DVM data should be synchronized with what the participating applications use. This synchronization should occur before any initial loads are run or any incremental transactional flows are initiated.

During installation, the DVMs used for the integration are imported with default data mappings. The values mapped by these DVMs must be changed as needed. Many DVMs are seeded and do not need to be changed. Because most of the Agile PLM attributes being mapped are list values, the Agile PLM data is not seeded and should be changed accordingly.

---

**Note:** The ICC and manufacturers must be configured, before the DVMs are called. In addition, Orgs DVM must already be configured.

---



---

**Note:** You can modify the values according to your requirements. You can add rows of value mappings, but you cannot change the DVM name, column name, or number of columns.

---

Table 10-17 lists DVMs used for this integration and their description:

**Note:** The mandatory DVMs are listed in bold.

**Table 10-17 Domain Value Maps (DVM)**

DVM	Description
AGILE_INTEGRATION_USERS	The Agile PLM Change originator users are mapped to the RequesterPartyReference in the EBM.
AGILE_SITE_TARGET_MAPPING	DEFAULT_MASTER_ORG in Oracle E-Business Suite is specified here. This is used when the Multisite_Enabled property is set to False and no organization associated with the item in Agile. When the Multisite_Enabled property is True, the sites in Agile PLM are mapped to various orgs in Oracle E-Business Suite. A site could be mapped to multiple orgs in the Oracle E-Business Suite column with " " delimiter.
AGILE_TARGET_SITE_MAPPING	The Oracle E-Business Suite orgs to Agile PLM sites are mapped. This is used for Oracle E-Business Suite to Agile PLM flows. A one-to-one mapping exists between the Oracle E-Business Suite org to Agile PLM site.
EBIZ_AGILE_APPS_USER	Used in mapping the user name depending on the Language code DVM.
ECO_CLASSIFICATION_CODE	Used for Oracle E-Business Suite attribute ECO_ATTR/ECO_CHANGE_ORDER_TYPE/CHANGE_MANAGEMENT_TYPE Query : SELECT change_mgmt_type_code FROM eng_change_order_types_VL where type_classification = 'CATEGORY' This DVM is needed for the CO Update flow.
ECO_ENGINEERINGCHANGEORDERLINE_AVAILABLETOMRPINDICATOR	Used for Oracle E-Business Suite attribute ECO_ATTR/ECO_REVISED_ITEM_TYPE/ECO_REVISED_ITEM_TYPE_ITEM/MRP_ACTIVE
ECO_ENGINEERINGCHANGEORDERLINE_DISPOSITION_TYPE_CODE	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/DISPOSITION_TYPE
ECO_ENGINEERINGCHANGEORDERLINE_DISPOSITION_TYPE_CODE	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/DISPOSITION_TYPE
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_BILLOFMATERIALSCOMPONENTITEM_ATPCHECKREQUIREDINDICATOR	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/COMPONENT_ITEM_TBL/CHECK_ATP
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_BILLOFMATERIALSCOMPONENTITEM_ATPCHECKREQUIREDINDICATOR	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/COMPONENT_ITEM_TBL/CHECK_ATP

**Table 10-17 (Cont.) Domain Value Maps (DVM)**

DVM	Description
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_BILLOFMATERIALSCOMPONENTITEM_BILLOFMATERIALSSUBSTITUTECOMPONENTITEM_CHANGETYPECODE	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/COMPONENT_ITEM_TBL/COMPONENT_ITEM_TBL_ITEM/SUBSTITUTE_COMPONENT_TBL/SUBSTITUTE_COMPONENT_TBL_ITEM/ACD_TYPE
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_BILLOFMATERIALSCOMPONENTITEM_CHANGETYPECODE	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/COMPONENT_ITEM_TBL/SUBSTITUTE_COMPONENT_TBL/ACD_TYPE, ECO_REVISED_ITEM_TYPE/COMPONENT_ITEM_TBL/REFERENCE_DESIGNATOR_TBL/ACD_TYPE, ECO_REVISED_ITEM_TYPE/COMPONENT_ITEM_TBL/ACD_TYPE
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_BILLOFMATERIALSCOMPONENTITEM_CHANGETYPECODE	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/COMPONENT_ITEM_TBL/ ACD_TYPE
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_BILLOFMATERIALSCOMPONENTITEM_COSTROLLUPINCLUSIONINDICATOR	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/COMPONENT_ITEM_TBL/INCLUDE_IN_COST_ROLLUP
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_BILLOFMATERIALSCOMPONENTITEM_COSTROLLUPINCLUSIONINDICATOR	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/COMPONENT_ITEM_TBL/ INCLUDE_IN_COST_ROLLUP
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_BILLOFMATERIALSCOMPONENTITEM_FRACTIONALLOWEDINDICATOR	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/COMPONENT_ITEM_TBL/ENFORCE_INT_REQUIREMENTS
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_BILLOFMATERIALSCOMPONENTITEM_FRACTIONALLOWEDINDICATOR	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/COMPONENT_ITEM_TBL/ENFORCE_INT_REQUIREMENTS
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_BILLOFMATERIALSCOMPONENTITEM_MUTUALLYEXCLUSIVEOPTIONINDICATOR	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/COMPONENT_ITEM_TBL/MUTUALLY_EXCLUSIVE
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_BILLOFMATERIALSCOMPONENTITEM_MUTUALLYEXCLUSIVEOPTIONINDICATOR	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/COMPONENT_ITEM_TBL/MUTUALLY_EXCLUSIVE

**Table 10–17 (Cont.) Domain Value Maps (DVM)**

DVM	Description
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_BILLOFMATERIALSCOMPONENTITEM_OPTIONALINDICATOR	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/COMPONENT_ITEM_TBL/OPTIONAL
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_BILLOFMATERIALSCOMPONENTITEM_OPTIONALINDICATOR	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/COMPONENT_ITEM_TBL/OPTIONAL
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_BILLOFMATERIALSCOMPONENTITEM_REQUIREDFORREVENUEINDICATOR	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/COMPONENT_ITEM_TBL/REQUIRED_FOR_REVENUE
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_BILLOFMATERIALSCOMPONENTITEM_REQUIREDFORREVENUEINDICATOR	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/COMPONENT_ITEM_TBL/REQUIRED_FOR_REVENUE
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_BILLOFMATERIALSCOMPONENTITEM_REQUIREDTOSHIPINDICATOR	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/COMPONENT_ITEM_TBL/REQUIRED_TO_SHIP
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_BILLOFMATERIALSCOMPONENTITEM_REQUIREDTOSHIPINDICATOR	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/COMPONENT_ITEM_TBL/REQUIRED_TO_SHIP
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_BILLOFMATERIALSCOMPONENTITEM_SHIPPINGALLOWEDINDICATOR	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/COMPONENT_ITEM_TBL/SHIPPING_ALLOWED
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_BILLOFMATERIALSCOMPONENTITEM_SHIPPINGALLOWEDINDICATOR	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/COMPONENT_ITEM_TBL/SHIPPING_ALLOWED
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_BILLOFMATERIALSCOMPONENTITEM_SHIPPINGDOCUMENTVISIBILITYINDICATOR	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/COMPONENT_ITEM_TBL/INCLUDE_ON_SHIP_DOCS
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_BILLOFMATERIALSCOMPONENTITEM_SHIPPINGDOCUMENTVISIBILITYINDICATOR	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/COMPONENT_ITEM_TBL/INCLUDE_ON_SHIP_DOCS
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_ENGINEERINGINDICATOR	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/STRUCTURE_HEADER/ASSEMBLY_TYPE

**Table 10-17 (Cont.) Domain Value Maps (DVM)**

DVM	Description
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_ENGINEERINGINDICATOR	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/STRUCTURE_HEADER/ASSEMBLY_TYPE
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_NAME	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/ALTERNATE_BOM_CODE
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_NAME	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/ALTERNATE_BOM_CODE
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_NAME	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE / ALTERNATE_BOM_CODE
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_TYPECODE	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/STRUCTURE_HEADER/STRUCTURE_TYPE_NAME, ECO_REVISED_ITEM_TYPE/STRUCTURE_TYPE_NAME
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_TYPECODE	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/STRUCTURE_HEADER/STRUCTURE_TYPE_NAME, ECO_REVISED_ITEM_TYPE/STRUCTURE_TYPE_NAME
ECO_ENGINEERINGCHANGEORDERLINE_REVISEDBILLOFMATERIALS_TYPECODE	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE /STRUCTURE_HEADER /STRUCTURE_TYPE_NAME
ECO_ENGINEERINGCHANGEORDERLINE_UPDATEWIPINDICATOR	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/UP_WIP
ECO_ENGINEERINGCHANGEORDERLINE_UPDATEWIPINDICATOR	Used for Oracle E-Business Suite attribute ECO_REVISED_ITEM_TYPE/UP_WIP
ECO_PRIORITY_CODE	Used for Oracle E-Business Suite attribute ECO_CHANGE_ORDER_TYPE/PRIORITY_CODE
ECO_PRIORITY_CODE	Used for Oracle E-Business Suite attribute ECO_CHANGE_ORDER_TYPE/PRIORITY_CODE
ECO_REASON_CODE	Used for Oracle E-Business Suite attribute ECO_CHANGE_ORDER_TYPE/REASON_CODE. Used for Agile PLM's Reason Code attribute of a Change.
ECO_REASON_CODE	Used for Oracle E-Business Suite attribute ECO_CHANGE_ORDER_TYPE/REASON_CODE. Used for Agile PLM's Reason Code attribute of a Change.

**Table 10-17 (Cont.) Domain Value Maps (DVM)**

DVM	Description
ECO_STATUS_CODE	Used for Oracle E-Business Suite attribute ECO_CHANGE_ORDER_TYPE/STATUS_CODE, ECO_REVISED_ITEM_TYPE/STATUS_CODE. Use for an Agile PLM Status attribute of a change. Here, the Oracle E-Business Suite values are language-independent. The query used for retrieving corresponding DVM values from Oracle E-Business Suite tables is: SELECT status_code FROM eng_change_statuses_v1 WHERE status_name = <p_status_name>;
ECO_STATUS_CODE	Used for Oracle E-Business Suite attribute ECO_CHANGE_ORDER_TYPE/STATUS_CODE, ECO_REVISED_ITEM_TYPE/STATUS_CODE. Use for the Agile PLM Status attribute of a Change. Here, the Oracle E-Business Suite values are language-independent. The query used for retrieving corresponding DVM values from Oracle E-Business Suite tables is: SELECT status_code FROM eng_change_statuses_v1 WHERE status_name = p_status_name;
ECO_TYPECODE	Used for Oracle E-Business Suite attribute CHANGE_ORDER_TYPE_ID. Used for the Agile PLM Change Type attribute of a Change. Here, the Oracle E-Business Suite values are language-independent. The query used for retrieving corresponding DVM values from Oracle E-Business Suite tables is: SELECT change_order_type_id FROM eng_change_order_types_v1 WHERE type_name = p_change_order_type AND change_mgmt_type_code = 'CHANGE_ORDER' AND type_classification='HEADER';
ITEM_BILLING_TYPE_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/SERVICE_OBJ_TYPE/MATERIAL_BILLABLE_FLAG
ITEM_BILLING_TYPE_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/SERVICE_OBJ_TYPE/MATERIAL_BILLABLE_FLAG
ITEM_BILLING_TYPE_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/SERVICE_OBJ_TYPE/MATERIAL_BILLABLE_FLAG
ITEM_BOM_ITEM_TYPE_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/BOM_OBJ_TYPE/BOM_ITEM_TYPE
ITEM_BOM_ITEMTYPE_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/BOM_OBJ_TYPE/BOM_ITEM_TYPE
ITEM_BOM_ITEMTYPE_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/BOM_OBJ_TYPE/BOM_ITEM_TYPE
ITEM_CONSIGNMENT_ITEM_INDICATOR	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/GPLANNING_OBJ_TYPE/CONSHNED_FLAG

**Table 10-17 (Cont.) Domain Value Maps (DVM)**

DVM	Description
ITEM_CONSIGNMENT_ITEM_INDICATOR	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/GPLANNING_OBJ_TYPE/CONSIGNMENT_FLAG
ITEM_CONSIGNMENT_ITEM_INDICATOR	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/GPLANNING_OBJ_TYPE/CONSIGNMENT_FLAG
ITEM_CONTRACT_TYPE_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/ASSET_OBJ_TYPE/CONTRACT_ITEM_TYPE_CODE
ITEM_CONTRACT_TYPE_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/ASSET_OBJ_TYPE/CONTRACT_ITEM_TYPE_CODE
ITEM_CONTRACT_TYPE_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/ASSET_OBJ_TYPE/CONTRACT_ITEM_TYPE_CODE
ITEM_CREATE_FIXED_ASSET_INDICATOR	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/SERVICE_OBJ_TYPE/ASSET_CREATION_CODE
ITEM_CREATE_FIXED_ASSET_INDICATOR	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/SERVICE_OBJ_TYPE/ASSET_CREATION_CODE
ITEM_CREATE_FIXED_ASSET_INDICATOR	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/SERVICE_OBJ_TYPE/ASSET_CREATION_CODE
ITEM_DUAL_UOM_TRACKING_INDICATOR	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/MAIN_OBJ_TYPE/TRACKING_QUANTITY_IND
ITEM_DUAL_UOM_TRACKING_INDICATOR	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/MAIN_OBJ_TYPE/TRACKING_QUANTITY_IND
ITEM_DUAL_UOM_TRACKING_INDICATOR	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/MAIN_OBJ_TYPE/TRACKING_QUANTITY_IND
ITEM_EFFECTIVITY_CONTROL_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/BOM_OBJ_TYPE/EFFECTIVITY_CONTROL
ITEM_EFFECTIVITY_CONTROL_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/BOM_OBJ_TYPE/EFFECTIVITY_CONTROL
ITEM_EFFECTIVITY_CONTROL_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/BOM_OBJ_TYPE/EFFECTIVITY_CONTROL

**Table 10-17 (Cont.) Domain Value Maps (DVM)**

DVM	Description
ITEM_INDICATOR	YES/NO DVM used for multiple Item attributes ITEM_OBJ/INVENTORY_OBJ_TYPE/SERIAL_STATUS_ENABLED, ITEM_OBJ/INVENTORY_OBJ_TYPE/LOT_STATUS_ENABLED, ITEM_OBJ/INVENTORY_OBJ_TYPE/CYCLE_COUNT_ENABLED_FLAG, ITEM_OBJ/INVENTORY_OBJ_TYPE/LOT_MERGE_ENABLED, ITEM_OBJ/INVENTORY_OBJ_TYPE/LOT_SPLIT_ENABLED, ITEM_OBJ/INVENTORY_OBJ_TYPE/STOCK_ENABLED_FLAG, ITEM_OBJ/PURCHASING_OBJ_TYPE/INSPECTION_REQUIRED_FLAG, ITEM_OBJ/PURCHASING_OBJ_TYPE/PURCHASING_ENABLED_FLAG, ITEM_OBJ/PURCHASING_OBJ_TYPE/RECEIPT_REQUIRED_FLAG, ITEM_OBJ/PURCHASING_OBJ_TYPE/RFQ_REQUIRED_FLAG, ITEM_OBJ/PURCHASING_OBJ_TYPE/TAXABLE_FLAG, ITEM_OBJ/PURCHASING_OBJ_TYPE/MUST_USE_APPROVED_VENDOR_FL, ITEM_OBJ/RECEIVING_OBJ_TYPE/ALLOW_SUBSTITUTE_RECEIPTS_F, ITEM_OBJ/RECEIVING_OBJ_TYPE/ALLOW_UNORDERED_RECEIPTS_FL, ITEM_OBJ/BOM_OBJ_TYPE/BOM_ENABLED_FLAG, ITEM_OBJ/BOM_OBJ_TYPE/ENG_ITEM_FLAG, ITEM_OBJ/COSTING_OBJ_TYPE/COSTING_ENABLED_FLAG, ITEM_OBJ/COSTING_OBJ_TYPE/INVENTORY_ASSET_FLAG, ITEM_OBJ/ORDER_OBJ_TYPE/CUSTOMER_ORDER_FLAG, ITEM_OBJ/ORDER_OBJ_TYPE/RETURNABLE_FLAG

**Table 10-17 (Cont.) Domain Value Maps (DVM)**

DVM	Description
ITEM_INDICATOR	YES/NO DVM used for multiple Item attributes ITEM_OBJ/INVENTORY_OBJ_TYPE/SERIAL_STATUS_ENABLED, ITEM_OBJ/INVENTORY_OBJ_TYPE/LOT_STATUS_ENABLED, ITEM_OBJ/INVENTORY_OBJ_TYPE/CYCLE_COUNT_ENABLED_FLAG, ITEM_OBJ/INVENTORY_OBJ_TYPE/LOT_MERGE_ENABLED, ITEM_OBJ/INVENTORY_OBJ_TYPE/LOT_SPLIT_ENABLED, ITEM_OBJ/INVENTORY_OBJ_TYPE/STOCK_ENABLED_FLAG, ITEM_OBJ/PURCHASING_OBJ_TYPE/INSPECTION_REQUIRED_FLAG, ITEM_OBJ/PURCHASING_OBJ_TYPE/PURCHASING_ENABLED_FLAG, ITEM_OBJ/PURCHASING_OBJ_TYPE/RECEIPT_REQUIRED_FLAG, ITEM_OBJ/PURCHASING_OBJ_TYPE/RFQ_REQUIRED_FLAG, ITEM_OBJ/PURCHASING_OBJ_TYPE/TAXABLE_FLAG, ITEM_OBJ/PURCHASING_OBJ_TYPE/MUST_USE_APPROVED_VENDOR_FL, ITEM_OBJ/RECEIVING_OBJ_TYPE/ALLOW_SUBSTITUTE_RECEIPTS_F, ITEM_OBJ/RECEIVING_OBJ_TYPE/ALLOW_UNORDERED_RECEIPTS_FL, ITEM_OBJ/BOM_OBJ_TYPE/BOM_ENABLED_FLAG, ITEM_OBJ/BOM_OBJ_TYPE/ENG_ITEM_FLAG, ITEM_OBJ/COSTING_OBJ_TYPE/COSTING_ENABLED_FLAG, ITEM_OBJ/COSTING_OBJ_TYPE/INVENTORY_ASSET_FLAG, ITEM_OBJ/ORDER_OBJ_TYPE/CUSTOMER_ORDER_FLAG, ITEM_OBJ/ORDER_OBJ_TYPE/RETURNABLE_FLAG,

**Table 10-17 (Cont.) Domain Value Maps (DVM)**

DVM	Description
ITEM_INDICATOR	YES/NO DVM used for multiple Item attributes ITEM_OBJ/INVENTORY_OBJ_TYPE/SERIAL_STATUS_ENABLED, ITEM_OBJ/INVENTORY_OBJ_TYPE/LOT_STATUS_ENABLED, ITEM_OBJ/INVENTORY_OBJ_TYPE/CYCLE_COUNT_ENABLED_FLAG, ITEM_OBJ/INVENTORY_OBJ_TYPE/LOT_MERGE_ENABLED, ITEM_OBJ/INVENTORY_OBJ_TYPE/LOT_SPLIT_ENABLED, ITEM_OBJ/INVENTORY_OBJ_TYPE/STOCK_ENABLED_FLAG, ITEM_OBJ/PURCHASING_OBJ_TYPE/INSPECTION_REQUIRED_FLAG, ITEM_OBJ/PURCHASING_OBJ_TYPE/PURCHASING_ENABLED_FLAG, ITEM_OBJ/PURCHASING_OBJ_TYPE/RECEIPT_REQUIRED_FLAG, ITEM_OBJ/PURCHASING_OBJ_TYPE/RFQ_REQUIRED_FLAG, ITEM_OBJ/PURCHASING_OBJ_TYPE/TAXABLE_FLAG, ITEM_OBJ/PURCHASING_OBJ_TYPE/MUST_USE_APPROVED_VENDOR_FL, ITEM_OBJ/RECEIVING_OBJ_TYPE/ALLOW_SUBSTITUTE_RECEIPTS_F, ITEM_OBJ/RECEIVING_OBJ_TYPE/ALLOW_UNORDERED_RECEIPTS_FL, ITEM_OBJ/BOM_OBJ_TYPE/BOM_ENABLED_FLAG, ITEM_OBJ/BOM_OBJ_TYPE/ENG_ITEM_FLAG, ITEM_OBJ/COSTING_OBJ_TYPE/COSTING_ENABLED_FLAG, ITEM_OBJ/COSTING_OBJ_TYPE/INVENTORY_ASSET_FLAG, ITEM_OBJ/ORDER_OBJ_TYPE/CUSTOMER_ORDER_FLAG, ITEM_OBJ/ORDER_OBJ_TYPE/RETURNABLE_FLAG, ITEM_OBJ/ORDER_OBJ_TYPE/REPLENISH_TO_ORDER_FLAG, ITEM_OBJ/ORDER_OBJ_TYPE/PICK_COMPONENTS_FLAG,
ITEM_INVENTORY_PLANNING_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/GPLANNING_OBJ_TYPE/INVENTORY_PLANNING_CODE
ITEM_INVENTORY_PLANNING_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/GPLANNING_OBJ_TYPE/INVENTORY_PLANNING_CODE
ITEM_INVENTORY_PLANNING_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/GPLANNING_OBJ_TYPE/INVENTORY_PLANNING_CODE
ITEM_LOTEXPIRATION_ON_RECEIPT_INDICATOR	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/INVENTORY_OBJ_TYPE/LOT_CONTROL_CODE
ITEM_LOTEXPIRATION_ON_RECEIPT_INDICATOR	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/INVENTORY_OBJ_TYPE/LOT_CONTROL_CODE
ITEM_LOTEXPIRATION_ON_RECEIPT_INDICATOR	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/INVENTORY_OBJ_TYPE/LOT_CONTROL_CODE

**Table 10-17 (Cont.) Domain Value Maps (DVM)**

DVM	Description
ITEM_MAKEORBUY_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/GPLANNING_OBJ_TYPE/PLANNING_MAKE_BUY_CODE
ITEM_MAKEORBUY_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/GPLANNING_OBJ_TYPE/PLANNING_MAKE_BUY_CODE
ITEM_MAKEORBUY_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/ GPLANNING_OBJ_TYPE /PLANNING_MAKE_BUY_CODE
ITEM_PRIMARYCLASSIFICATIONCODE	Used for Oracle E-Business Suite Item attributes ITEM_OBJ/MAIN_OBJ_TYPE/ITEM_CATALOG_GROUP_CODE. The Agile PLM PartType of an item is mapped to the Oracle E-Business Suite item catalog category (ICC).
ITEM_PRIMARYCLASSIFICATIONCODE	Used for Oracle E-Business Suite Item attributes ITEM_OBJ/MAIN_OBJ_TYPE/ITEM_CATALOG_GROUP_CODE. The Agile PLM PartType of an item is mapped to the Oracle E-Business Suite ICC.
ITEM_PRIMARYCLASSIFICATIONCODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/ MAIN_OBJ_TYPE / ITEM_CATALOG_GROUP_CODE
ITEM_RECEIVING_ROUTING_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/ RECEIVING_OBJ_TYPE/RECEIVING_ROUTING_ID
ITEM_RECEIVING_ROUTING_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/ RECEIVING_OBJ_TYPE/RECEIVING_ROUTING_ID
ITEM_RECEIVING_ROUTING_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/ RECEIVING_OBJ_TYPE / RECEIVING_ROUTING_ID
ITEM_REPLENISHMENT_SOURCE_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/GPLANNING_OBJ_TYPE/SOURCE_TYPE
ITEM_REPLENISHMENT_SOURCE_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/GPLANNING_OBJ_TYPE/SOURCE_TYPE
ITEM_REPLENISHMENT_SOURCE_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/ GPLANNING_OBJ_TYPE / SOURCE_TYPE
ITEM_RESERVATION_ALLOWED_INDICATOR	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/INVENTORY_OBJ_TYPE/RESERVABLE_TYPE
ITEM_RESERVATION_ALLOWED_INDICATOR	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/INVENTORY_OBJ_TYPE/RESERVABLE_TYPE
ITEM_RESERVATION_ALLOWED_INDICATOR	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/ INVENTORY_OBJ_TYPE / RESERVABLE_TYPE

**Table 10-17 (Cont.) Domain Value Maps (DVM)**

DVM	Description
ITEM_RETURN_INSPECTION_REQUIRED_INDICATOR	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/PURCHASING_OBJ_TYPE/INSPECTION_REQUIRED_FLAG
ITEM_SERIALIZATION_EVENT_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/INVENTORY_OBJ_TYPE/SERIAL_NUMBER_CONTROL_CODE
ITEM_SERIALIZATION_EVENT_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/INVENTORY_OBJ_TYPE/SERIAL_NUMBER_CONTROL_CODE
ITEM_SERIALIZATION_EVENT_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/INVENTORY_OBJ_TYPE/SERIAL_NUMBER_CONTROL_CODE
ITEM_SERVICE_REQUEST_ENABLED_INDICATOR	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/ASSET_OBJ_TYPE/SERV_REQ_ENABLED_CODE
ITEM_SERVICE_REQUEST_ENABLED_INDICATOR	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/ASSET_OBJ_TYPE/SERV_REQ_ENABLED_CODE
ITEM_SERVICE_REQUEST_ENABLED_INDICATOR	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/ ASSET_OBJ_TYPE / SERV_REQ_ENABLED_CODE
ITEM_STATUS_CODE	Used for Oracle E-Business Suite Item attributes ITEM_OBJ/MAIN_OBJ_TYPE/INVENTORY_ITEM_STATUS_CODE. The Agile PLM Item Lifecycle phase attribute is mapped.
ITEM_STATUS_CODE	Used for Oracle E-Business Suite Item attributes ITEM_OBJ/MAIN_OBJ_TYPE/INVENTORY_ITEM_STATUS_CODE. The Agile PLM Item Lifecycle phase attribute is mapped.
ITEM_STATUS_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/ MAIN_OBJ_TYPE / INVENTORY_ITEM_STATUS_CODE
ITEM_TRACK_INSTANCE_INDICATOR	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/SERVICE_OBJ_TYPE/COMMS_NL_TRACKABLE_FLAG
ITEM_TRACK_INSTANCE_INDICATOR	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/SERVICE_OBJ_TYPE/COMMS_NL_TRACKABLE_FLAG
ITEM_TRACK_INSTANCE_INDICATOR	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/ SERVICE_OBJ_TYPE / COMMS_NL_TRACKABLE_FLAG
ITEM_UOM_CODE	Unit of Measure DVM for Item attributes ITEM_OBJ/PHYSICAL_OBJ_TYPE/VOLUME_UOM_CODE, ITEM_OBJ/PHYSICAL_OBJ_TYPE/WEIGHT_UOM_CODE
ITEM_UOM_CODE	Unit of Measure DVM for Item attributes ITEM_OBJ/PHYSICAL_OBJ_TYPE/VOLUME_UOM_CODE, ITEM_OBJ/PHYSICAL_OBJ_TYPE/WEIGHT_UOM_CODE

**Table 10-17 (Cont.) Domain Value Maps (DVM)**

DVM	Description
ITEM_UOM_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/ PHYSICAL_OBJ_TYPE / WEIGHT_UOM_CODE ITEM_OBJ/ PHYSICAL_OBJ_TYPE / VOLUME_UOM_CODE ITEM_OBJ/ PHYSICAL_OBJ_TYPE / DIMENSION_UOM_CODE
ITEM_UOM_CONVERSION_USAGE_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/MAIN_OBJ_TYPE/ALLOWED_UNITS_LOOKUP_CODE
ITEM_UOM_CONVERSION_USAGE_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/MAIN_OBJ_TYPE/ALLOWED_UNITS_LOOKUP_CODE
ITEM_UOM_CONVERSION_USAGE_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/ MAIN_OBJ_TYPE / ALLOWED_UNITS_LOOKUP_CODE
ITEM_WIP_SUPPLY_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/WIP_OBJ_TYPE/WIP_SUPPLY_TYPE
ITEM_WIP_SUPPLY_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/WIP_OBJ_TYPE/WIP_SUPPLY_TYPE
ITEM_WIP_SUPPLY_CODE	Used for Oracle E-Business Suite Item attribute ITEM_OBJ/ WIP_OBJ_TYPE/ WIP_SUPPLY_TYPE E
LANGUAGE_CODE	Language Code DVM for common and system-specific language code names are mapped.

## 10.5 Setting Configuration Properties

This integration uses various configuration parameters that control the behavior of the flow. AIAConfigurationProperties.xml, a standard AIA XML configuration file, is used for capturing the configuration parameters. The AIAConfigurationProperties.xml file is located at \$AIA\_HOME/aia\_instances/\$INSTANCE\_NAME/AIAMetaData/config. This AIA configuration file supports the system-level configuration parameters, service-level parameters, and module configuration parameters.

System-level parameters apply to all integrations running on the Service-Oriented Architecture (SOA) suite. Service-level parameters can be configured at the individual service level, such as Application Business Connector Service (ABCS).

---

**Note:** The configuration properties from Agile PLM and Oracle E-Business Suite are listed separately in this section, only for the purpose of identification. The actual AIAConfigurationProperties.xml file on the AIA server is a merge of the two.

---

### 10.5.1 Configuration Parameters

This integration uses the following types of configuration parameters:

- Pre-built integration level configuration parameters: Pre-built integration configuration parameters are implemented by means of the AIA module

configuration entry. The module configuration entry has a name and can contain any number of configuration parameters. A naming convention of pre-built integrations, PIPName is used for naming modules. The parameters inside the module are named with a cascaded naming convention, where individual words are separated with dots.

For example, agile.replicate.item

- Service-level configuration parameters: While most configuration requirements are satisfied by the PIP level configuration parameters, sometimes the behavior of a flow needs to be controlled at the service level. These parameters can be captured by means of AIA service configuration parameters. Service configuration entry is identified by the service name such as CreateItemAgileReqABCSImpl. The parameter names themselves are named with a cascaded naming convention as explained previously.

For more information about requirements for working with AIAConfigurationProperties.xml, see *Oracle Fusion Middleware Developer's Guide for Oracle Application Integration Architecture Foundation Pack 11g Release 1, How to Set Up AIA Workstation*.

## 10.5.2 Agile PLM Configurations

Table 10-18 lists the configuration parameters for Agile PLM:

**Table 10-18 Agile PLM Configuration Properties**

Properties	Default Value/Setting	Description
ModuleName	Agile	
LANG_LOCALE	English	Specifies the language locale information
MULTISITE_ENABLED	TRUE	When set to TRUE, the sites specified in Sites Tab of Items are used to determine the organizations in Oracle E-Business Suite to which they are mapped. When set to FALSE, the Page2 Multilist01attribute is used to determine the organizations in Oracle E-Business Suite to which the item will be extended.
Item.UnitCostAttribute	Site.Numeric01	Determines the attribute to which the unit cost from Oracle E-Business Suite will be updated in Agile PLM.
Item.AvailableQuantityAttribute	Site.Numeric02	Determines the attribute to which the available quantity from Oracle E-Business Suite will be updated in Agile PLM.
Item.OnHandQuantityAttribute	Site.Numeric03	Determines the attribute to which the on-hand quantity from Oracle E-Business Suite will be updated in Agile PLM.
Item.ReservedQuantityAttribute	Site.Numeric04	Determines the attribute to which the reserved quantity from Oracle E-Business Suite will be updated in Agile PLM.

**Table 10–18 (Cont.) Agile PLM Configuration Properties**

Properties	Default Value/Setting	Description
Change.TransferStatusAttribute	PageTwo.Text02	Determines the attribute of the transfer status of a change.
REPLICATE_BOM_ENABLED	FALSE	When the change flow is from Agile PLM to Oracle E-Business Suite, the possible values are Transferred and Errorred.
COMMON_BOM_ENABLED	FALSE	When the change flow is from Oracle E-Business Suite to Agile PLM, the value will be the same as that of the status of the change in all the organizations of Oracle E-Business Suite.
		Used for sample replicate BOM customization.
		Used for sample common BOM customization.

**Note:** Multisite enabled property is governed by distributed processing aspects in Agile PLM. When it is set to TRUE (default), the Item.UnitCostAttribute, Item.AvailableQuantityAttribute, Item.OnHandQuantityAttribute, and Item.ReservedQuantityAttribute can be set to Site Tab Flex Attributes. You can use Numeric, Text, or Money flex-fields on the Site tab for these settings, and it is denoted by the first element, Site. For example, Site.Numeric01. When it is set to FALSE, all these attributes need to be set to Page2 or Page3 flex-fields. Hence, the settings will need to be changed to PageTwo.Numeric01 or PageThree.Numeric01 accordingly. The names of the attributes can be derived from the ItemABM Schema, which can be found in Agile PLM Interfaces.

**Note:** The Composite Application Validation System (CAVS) feature is not supported for the flows in this release. However, the CAVS enabling properties for the flows are deployed.

### 10.5.2.1 Provider ABCS

Table 10–19 lists the properties of the `UpdateEngineeringChangeOrderListAgileProvABCSImpl` service:

**Table 10–19 Properties of `UpdateEngineeringChangeOrderListAgileProvABCSImpl` service**

Property	Default Value/Setting	Description
ABCSExtension.PreProcessABM	false	User exit for the pre-process Application Business Message (ABM) should be called or not
ABCSExtension.PreProcessEBM	false	User exit for the pre-process Enterprise Business Message (EBM) should be called or not

**Table 10–19 (Cont.) Properties of *UpdateEngineeringChangeOrderListAgileProvABCImpl* service**

Property	Default Value/Setting	Description
ABCSExtension.PostProcessEBM	false	User exit for the post-process EBM should be called or not
ABCSExtension.PostProcessABM	false	User exit for the post-process ABM should be called or not
TRACE.LOG.ENABLED	true	Use tracelog for the flow
Default.SystemID	AGILE_01	System ID of Agile PLM application instance
Routing.EngineeringChangeOrderResponseEBS.UpdateEngineeringChangeOrderListResponse.RouteToCAVS	false	
Routing.EngineeringChangeOrderResponseEBS.UpdateEngineeringChangeOrderListResponse.CAVS.EndpointURI	http://\${http.hostname}:\${http.port}/AIAValidationSystemServlet/asyncresponsesimulator	CAVS SOAP URL When the RouteToCAVS property is set to true, use the URL mentioned to connect to CAVS. This invocation relates to the ECO response EBS
Routing.EngineeringChangeOrderResponseEBS.UpdateEngineeringChangeOrderListResponse.MessageProcessingInstruction.EnvironmentCode	PRODUCTION	Environment code such as 'PRODUCTION'/'CAVS'. Identifies the installation environment
Routing.ChangeABSService.RouteToCAVS	false	If set to True route to CAVS; otherwise, route to the Agile PLM application. This invocation relates to the change ABS service
Routing.ChangeABSService.AGILE_01.EndpointURI	http://\${agile.host}:\${agile.port}/AgilePLM/integration/services/ChangeABS	ChangeABS URL: When the RouteToCAVS property is set to false, use the URL mentioned to connect to the Agile PLM ChangeABS Service for the ChangeABSService partnerlink.
Routing.ChangeABSService.CAVS.EndpointURI	http://\${http.hostname}:\${http.port}/AIAValidationSystemServlet/syncresponsesimulator	CAVS SOAP URL When the RouteToCAVS property is set to true, use the URL mentioned to connect to CAVS. This invocation relates to the change ABS service
Routing.MergeABSService.RouteToCAVS	false	If set to True, route to CAVS; otherwise, route to the Agile PLM application. This invocation relates to the change merge ABS service
Routing.MergeABSService.CAVS.EndpointURI	http://\${http.hostname}:\${http.port}/AIAValidationSystemServlet/syncresponsesimulator	CAVS Simple Object Access Protocol (SOAP) URL When the RouteToCAVS property is set to true, use the URL mentioned to connect to CAVS. This invocation relates to the change merge ABS service

**Table 10–19 (Cont.) Properties of *UpdateEngineeringChangeOrderListAgileProvABCImpl* service**

Property	Default Value/Setting	Description
Routing.MergeABSService.AGILE_01.EndpointURI	http:// \${agile.host} : \${agile.port} / AgilePLM/integration/services/MergeABSService_Port	MergeABS URL: When the RouteToCAVS property is set to false, use the URL mentioned to connect to the Agile PLM MergeABS Service for the MergeABSService partnerlink.
Routing.ChangeStatusService.RouteToCAVS	false	If set to true, it is routed to CAVS; otherwise, routed to the Agile PLM application. This invocation relates to the change status ABS service
Routing.ChangeStatusService.CAVS.EndpointURI	http:// \${http.hostname} : \${http.port} / AIAValidationSystemServlet/syncresponsesimulator	CAVS URL When the RouteToCAVS property is set to true, use the URL mentioned to connect to CAVS. This invocation relates to the change status ABS service
Routing.ChangeStatusService.AGILE_01.EndpointURI	http:// \${agile.host} : \${agile.port} / AgilePLM/integration/services/ChangeABS	ChangeABS URL: When the RouteToCAVS property is set to False, use the URL mentioned to connect to the Agile PLM ChangeABS Service for the ChangeStatusService partnerlink.
Routing.ChangeStatusDBAdapter.RouteToCAVS	false	If set to true, it is routed to CAVS; otherwise, routed to the Agile PLM application. This invocation relates to the change status EDB Adapter
Routing.ChangeStatusDBAdapter.CAVS.EndpointURI	http:// \${http.hostname} : \${http.port} / AIAValidationSystemServlet/syncresponsesimulator	CAVS URL When the RouteToCAVS property is set to true, use the URL mentioned to connect to CAVS. This invocation relates to the change status EDB Adapter
Routing.ChangeStatusDBAdapter.AGILE_01.EndpointURI	http:// \${agile.host} : \${agile.port} / soa-infra/services/default/ChangeStatusDBAdapter/AIASystem.Agile.ABCSImpl.ChangeStatusDBAdapter_RS_ep?WSDL	ChangeABS URL: When the RouteToCAVS property is set to False, use the URL mentioned to connect to the Agile PLM ChangeABS Service for the EDB Adapter partnerlink.

**Table 10–20** lists the properties of the **UpdateItemBalanceListAgileProvABCImpl** service:

**Table 10–20 *UpdateItemBalanceListAgileProvABCImpl* service**

Property	Default Value/Setting	Description
ABCSExtension.PreProcessABM	false	User exit for the pre-process ABM should be called
ABCSExtension.PreProcessEBM	false	User exit for the pre-process EBM should be called
ABCSExtension.PostProcessEBM	false	User exit for the post-process EBM should be called

**Table 10–20 (Cont.) UpdateItemBalanceListAgileProvABCImpl service**

Property	Default Value/Setting	Description
ABCSExtension.PostProcessABM	false	User exit for the post-process ABM should be called
TRACE.LOG.ENABLED	false	Use tracelog for the flow
DefaultSystemID	AGILE_01	System ID of the Agile PLM instance
Routing.ItemABSService.RouteToCAVS	false	If set to True, it is routed to CAVS; otherwise, routed to Agile PLM. This invocation is regarding Item ABS.
Routing.ItemABSService.CAVS.EndpointURI	http://\${http.hostname}:\${http.port}/AIA ValidationSystemServlet/syncresponsesimulator	CAVS URL When the RouteToCAVS property is set to True, use the URL mentioned to connect to CAVS. This is regarding Item ABS.
Routing.ItemABSService.AGILE_01.EndpointURI	http://\${agile.host}:\${agile.port}/Agile/integration/services/ItemABS	ItemABS URL: When the RouteToCAVS property is set to False, use the URL mentioned to connect to the Agile PLM ItemABS Service.
Routing.ItemBalanceResponseEBS.UpdateItemBalanceListResponse.RouteToCAVS	false	
Routing.ItemBalanceResponseEBS.UpdateItemBalanceListResponse.CAVS.EndpointURI	http://\${http.hostname}:\${http.port}/AIA ValidationSystemServlet/asyncresponsesimulator	CAVS URL When the RouteToCAVS property is set to true, use the URL mentioned to connect to CAVS. This invocation is regarding Itembalance response EBS.
Routing.ItemBalanceResponseEBS.UpdateItemBalanceListResponse.MessageProcessingInstruction.EnvironmentCode	PRODUCTION	Environment code such as 'PRODUCTION'/'CAVS'. Identifies the installation environment.

Table 10–21 lists the properties of the **UpdateItemListAgileProvABCImpl service**:

**Table 10–21 UpdateItemListAgileProvABCImpl service**

Property	Default Value/Setting	Description
ABCSExtension.PreProcessABM	false	Decides whether the user exit for the pre-process ABM should be called
ABCSExtension.PreProcessEBM	false	Decides whether the user exit for the pre-process EBM should be called
ABCSExtension.PostProcessEBM	false	Decides whether the user exit for the post-process EBM should be called
ABCSExtension.PostProcessABM	false	Decides whether the user exit for the post-process ABM should be called
TRACE.LOG.ENABLED	false	Use tracelog for the flow

**Table 10-21 (Cont.) UpdateItemListAgileProvABCImpl service**

Property	Default Value/Setting	Description
Default.SystemID	AGILE_01	System ID of the Agile PLM application instance
Routing.ItemResponse.EBS.UpdateItemListResponse.MessageProcessingInstruction.EnvironmentCode	PRODUCTION	Environment code such as 'PRODUCTION'/'CAVS' and so on. Identifies the installation environment.
Routing.ItemABSService.RouteToCAVS	false	If set to True, it is routed to CAVS; otherwise, routed to the Agile PLM application.  This invocation is regarding the Agile PLM Item ABS service.
Routing.ItemABSService.CAVS.EndpointURI	http:// \${http.hostName} : \${http.port} / AIA ValidationSystemServlet / syncresponsesimulator	Agile PLM Item ABS service SOAP URL. When the RouteToCAVS property is set to True, use the URL mentioned to connect to CAVS. This invocation is regarding the Agile PLM Item ABS service
Routing.ItemABSService.AGILE_01.EndpointURI	http:// \${agile.host} : \${agile.port} / \${agiaq.path} / integration / services / ItemABS	ItemABS URL. When the RouteToCAVS property is set to False, use the URL mentioned to connect to the Agile PLM Item ABS service.
Routing.ItemResponse.EBS.UpdateItemListResponse.RouteToCAVS	false	If set to True, it is route to CAVS; otherwise, routed to response item EBS. This invocation is regarding the item response EBS
Routing.ItemResponse.EBS.UpdateItemListResponse.CAVS.EndpointURI	http:// \${http.hostName} : \${http.port} / AIA ValidationSystemServlet / asyncresponsesimulator	CAVS URL; When the RouteToCAVS property is set to True, use the URL mentioned to connect to CAVS. This invocation is regarding item response EBS

Table 10-22 lists the properties of the **SyncBillOfMaterialsConfigurationListAgileProvABCImpl** service:

**Table 10-22 SyncBillOfMaterialsConfigurationListAgileProvABCImpl service**

Property	Default Value/Setting	Description
Default.SystemID	AGILE_01	System ID for mapping
Routing.BillOfMaterialsConfigurationEBS.SyncBillOfMaterialsConfigurationList.RouteToCAVS	false	NA
Routing.BillOfMaterialsConfigurationEBS.SyncBillOfMaterialsConfigurationList.CAVS.EndpointURI	http:// \${http.hostName} : \${http.port} / AIA ValidationSystemServlet / asyncresponsesimulator	When RouteToCAVS property is set to true, use the URL mentioned to connect to CAVS
Routing.ConfiguratorTerminationService.RouteToCAVS	false	NA

**Table 10–22 (Cont.) SyncBillOfMaterialsConfigurationListAgileProvABCSImpl service**

Property	Default Value/Setting	Description
Routing.ConfiguratorTerminationService.AGILE_01.EndpointURI	http:// \${agile.host}: \${agile.port} / \${agiag.port} / vm / services / ConfigurationTerminationService	Partner link end point URL
Routing.ConfiguratorTerminationService.CAVS.Endpoint.URI	http:// \${http.hostname}: \${http.port} / AIA ValidationSystemServlet / asyncrequestrecipient	When RouteToCAVS property is set to true, use the URL mentioned to connect to CAVS Partner link
ABCSExtension.PreFormEBMtoABM	false	User exit for the pre-process EBM should be called or not
ABCSExtension.PostXformEBMtoABM	false	User exit for the post-process EBM should be called or not
ABCSExtension.PreInvokeConfiguratorTerminationMessage	false	User exit for the pre-process invoke partner link should be called or not
ABCSExtension.PostInvokeConfiguratorTerminationMessage	false	User exit for the post-process invoke partner link should be called or not

### 10.5.2.2 Requester ABCS

Table 10–23 lists the properties of the **ProcessEngineeringChangeOrderAgileReqABCSImpl** service:

**Table 10–23 ProcessEngineeringChangeOrderAgileReqABCSImpl service**

Property	Default Value/Setting	Description
ABCSExtension.PreProcessABM	false	User exit for the pre-process ABM should be called
ABCSExtension.PreProcessEBM	false	User exit for the pre-process EBM should be called
ABCSExtension.PostProcessEBM	false	User exit for the post-process EBM should be called
ABCSExtension.PostProcessABM	false	User exit for the post-process ABM should be called
TRACE.LOG.ENABLED	false	Use tracelog for the flow
Default.SystemID	AGILE_01	System ID of the Agile PLM application instance
Routing.ChangeABSService.RouteToCAVS	false	If set to True, route to CAVS else route to Agile PLM application. This invocation would be with respect to Change ABS
Routing.ChangeABSService.AGILE_01.EndpointURI	http:// \${agile.host}: \${agile.port} / Agile / integration / services / ChangeABS	ChangeABS URL: When the RouteToCAVS property is set to False, use the URL mentioned to connect to the Agile PLM ChangeABS Service.

**Table 10–23 (Cont.) ProcessEngineeringChangeOrderAgileReqABCSImpl service**

Property	Default Value/Setting	Description
Routing.ChangeABSService.CAVS.EndpointURI	http:// \${http.hostname}: \${http.port}/AIAValidationSystemServlet/asyncresponsesimulator	CAVS URL When the RouteToCAVS property is set to True, use the URL mentioned to connect to CAVS. This invocation is regarding Change ABS.
Routing.EngineeringChangeOrderEBS.CreateEngineeringChangeOrderList.RouteToCAVS	false	If set to True, route to CAVS; otherwise, route to EngineeringChangeOrder EBS (Enterprise Business Service)
Routing.EngineeringChangeOrderEBS.CreateEngineeringChangeOrderList.CAVS.EndpointURI	http:// \${http.hostname}: \${http.port}/AIAValidationSystemServlet/asyncresponsesimulator	CAVS URL When the RouteToCAVS property is set to True, use the URL mentioned to connect to CAVS
Routing.EngineeringChangeOrderEBS.CreateEngineeringChangeOrderList.MessageProcessingInstruction.EnvironmentCode	PRODUCTION	Environment code such as 'PRODUCTION' / 'CAVS'. Identifies the installation environment

Table 10–24 lists the properties of the **SyncItemListAgileReqABCS** service:

**Table 10–24 SyncItemListAgileReqABCS service**

Property	Default Value/Setting	Description
TRACE.LOG.ENABLED	false	NA
Default.SystemID	AGILE_01	System ID of the Agile PLM instance.

Table 10–25 lists the properties of the **SyncItemListAgileReqABCSImpl** service:

**Table 10–25 SyncItemListAgileReqABCSImpl service**

Property	Default Value/Setting	Description
ABCSExtension.PreProcessABM	false	NA
ABCSExtension.PreProcessEBM	false	NA
ABCSExtension.PostProcessEBM	false	NA
ABCSExtension.PostProcessABM	false	NA
TRACE.LOG.ENABLED	false	NA
Default.SystemID	AGILE_01	System ID of the Agile PLM application instance

**Table 10–25 (Cont.) SyncItemListAgileReqABCImpl service**

Property	Default Value/Setting	Description
Routing.ItemEBS.Syn cItemList.RouteToCA VS	false	If set to True, route to CAVS; otherwise, route to Item EBS
Routing.ItemEBS.Syn cItemList.CAVS.Endp ointURI	http://\${http.hostna me}:\${http.port}/AIA ValidationSystemServlet/asyncresponsesimulator	CAVS URL; When the RouteToCAVS property is set to True, use the URL mentioned to connect to CAVS
Routing.ItemEBS.Syn cItemList.MessagePr ocessingInstruction.E nvironmentCode	PRODUCTION	Environment code such as 'PRODUCTION' / 'CAVS' and so on. Identifies the installation environment

[Table 10–26](#) lists the properties of the **ValidateEngineeringChangeOrderListAgileReqABCImpl** service:

**Table 10–26 ValidateEngineeringChangeOrderListAgileReqABCImpl service**

Property	Default Value/Setting	Description
ABCSExtension.PreP rocessABM	false	NA
ABCSExtension.PreP rocessEBM	false	NA
ABCSExtension.Post ProcessEBM	false	NA
ABCSExtension.Post ProcessABM	false	NA
TRACE.LOG.ENABL ED	false	NA
Default.SystemID	AGILE_01	NA
Routing.Engineering ChangeOrderEBS.Val idateEngineeringCha ngeOrderList.RouteT oCAVS	false	If set to True, route to CAVS; otherwise, route to EngineeringChangeOrder EBS (Enterprise Business Service)
Routing.Engineering ChangeOrderEBS.Val idateEngineeringCha ngeOrderList.CAVS.E ndpointURI	http://\${http.hostna me}:\${http.port}/AIA ValidationSystemServlet/asyncresponsesimulator	CAVS URL When the RouteToCAVS property is set to True, use the URL mentioned to connect to CAVS
Routing.Engineering ChangeOrderEBS.Val idateEngineeringCha ngeOrderList.MessageProcessingInstruction.EnvironmentCode	PRODUCTION	Environment code such as 'PRODUCTION' / 'CAVS'. Identifies the installation environment
Routing.ChangeABSS ervice.RouteToCAVS	false	If set to True, route to CAVS; otherwise, route to the Agile PLM application. This invocation regards Change ABS

**Table 10–26 (Cont.) ValidateEngineeringChangeOrderListAgileReqABCImpl service**

Property	Default Value/Setting	Description
Routing.ChangeABS.service.AGILE_01.EndpointURI	http:// \${agile.host} : \${agile.port} / Agile /integration/services /ChangeABS	ChangeABS URL: When RouteToCAVS property is set to False, use the URL mentioned to connect to the Agile PLM ChangeABS service.
Routing.ChangeABS.service.CAVS.EndpointURI	http:// \${http.hostna me} : \${http.port} / AIA ValidationSystemServlet/asyncresponsesimulator	CAVS URL When the RouteToCAVS property is set to True, use the URL mentioned to connect to CAVS. This invocation is regarding the Change ABS

[Table 10–27](#) lists the properties of the **GetConfiguratorURLAgileReqABCImpl** service:

**Table 10–27 GetConfiguratorURLAgileReqABCImpl service**

Property	Default Value/Setting	Description
Default.SystemID	AGILE_01	System ID for mapping
Agile_site.ColumnName	AGILE_SITE	The Agile PLM site column name in the DVM
Agile_site.TargetColumnName	TARGET_VALUE	The Agile PLM site target column name in the DVM
Agile_site.DefaultOrgPropertyName	DEFAULT_MASTER_ORG	The Agile PLM site default property name in the DVM
Routing.BillOfMaterialsConfigurationEBS.GetConfiguratorURL.RouteToCAVS	false	NA
Routing.BillOfMaterialsConfigurationEBS.GetConfiguratorURL.CAVS.EndpointURI	http:// \${http.hostna me} : \${http.port} / AIA ValidationSystemServlet/asyncresponsesipient	When the RouteToCAVS property is set to True, use the URL mentioned to connect to CAVS
ABCSExtension.PreXformABMtoEBM	false	User exit for the pre-process ABM should be called
ABCSExtension.PreInvokeEBS	false	User exit for the pre-process Invoke should be called
ABCSExtension.PostXformABMtoEBM	false	User exit for the post-process ABM should be called
ABCSExtensionPostReceiveGetURLResponse	false	User exit for the post-process EBM should be called
Return_URL	http:// \${http.hostna me} : \${http.port} / AGILE_PATH/default/actio nDialogs/FinishExternalConfigurator.jsp	The Return URL to be used by the Oracle E-Business Suite for returning after configuration

### 10.5.3 Oracle E-Business Suite Configurations

Table 10-28 lists configuration properties for Oracle E-Business Suite:

**Table 10-28 E-Business Suite Configuration Properties**

Property	Default Value/Setting	Description
ModuleName	Ebiz	
FIXED_ORG_FOR_INBOUND_DATA_TRANSFER	If set, Oracle E-Business Suite to Agile PLM flows will publish data only for this particular organization code	
IS_PIM_INSTALLED	false	If set to True, PIM is installed; False indicates a non-PIM scenario. It should be left as False for this release with Oracle E-Business Suite 11i.
DEFAULT_MASTER_ORG	Default organization when the incoming one is empty for New Part Request	
RESPONSIBILITY	System Administrator	Responsibility for setting FND Apps Context
USER	mfg	User for setting FND Apps Context
EBIZ_01.SERVER_TIMEZONE	GMT-08:00	Corresponds to GMT offset of Oracle E-Business Suite instance  Please refer to Oracle E-Business profile SERVER_TIMEZONE_ID to configure this property, for example, '-07:00' or 'GMT-07:00' or 'PST'
EBIZ_01.LANG	ENG	
PROJECTS_RESPONSIBILITY	Projects, Vision Services (USA)	
UNIMPLEMENTED_BOM_UPDATES_ALLOWED	True/False	If this property is set to 'T' redlining of unimplemented BOMs can be done from Agile. If it is 'F' only implemented BOMs can be redlined.
ALLOW_LIFECYCLE_PHASE_SKIP	True/False	If this property is set to 'T', life cycle phases in Ebiz can be skipped, if it is 'F', life cycle phase skip is not possible.

#### 10.5.3.1 Provider ABCS

Table 10-29 lists the properties of the `CreateEngineeringChangeOrderListEbizProvABCSImpl` service:

**Table 10-29 CreateEngineeringChangeOrderListEbizProvABCSImpl service**

Property	Default Value/Settings	Description
Default.SystemID	EBIZ_01	Used to get the default XREF target column name when TargetId is empty in the incoming EBM
Routing.ECOService.RouteToCAVS	false	Use CAVS for ECOService

Table 10-29 (Cont.) CreateEngineeringChangeOrderListEbizProvABCImpl service

Property	Default Value/Settings	Description
ROUTING.ECOSERV ICE.CAVS.ENDPOINTURI	http:// \${fp.server.soaserverhostname} : \${fp.server.soaserverport} / AIAValidationSystemServlet / syncresponsesimulator	ECOService endpoint URI when set to CAVS
ROUTING.ECOSERV ICE.EBIZ_01.ENDPOINTURI	http:// \${fp.server.soaserverhostname} : \${fp.server.soaserverport} / soa-infra / services / default / CreateEngineeringChangeOrderListEbizAdapter / CreateEngineeringChangeOrderListEbizAdapter_ep	ECOService run-time target endpoint URI
Routing.EngineeringChangeOrderResponseEBS.RouteToCAVS	false	Use CAVS for EngineeringChangeOrderResponseEBS
ROUTING.ENGINEERINGCHANGEORDERRESPONSEEBS.CAVS.ENDPOINTURI	http:// \${fp.server.soaserverhostname} : \${fp.server.soaserverport} / AIAValidationSystemServlet / asyncresponsesimulator	EngineeringChangeOrderResponseEBS endpoint URI when set to CAVS
ABCSEXTENSION.PREPROCESSABM	false	User exit for the pre-process ABM should be called or not
ABCSEXTENSION.POSTPROCESSABM	false	User exit for the post-process ABM should be called or not
ABCSEXTENSION.PREPROCESSEBM	false	User exit for the pre-process EBM should be called or not
ABCSEXTENSION.POSTPROCESSEBM	false	User exit for the post-process EBM should be called or not
CUSTOM.TRANSFORMATIONS.EBM_TO_ABM	false	Use Custom transformation for EBM to ABM
CUSTOM.TRANSFORMATIONS.ABM_TO_EBM	false	Use Custom transformation for ABM to EBM
ASSIGN_ITEM_TO_CHILD_ORG	T	Indicates that if Components and SubstituteComponents coming in do not exist in context, org should be assigned from master org
TEMPLATE_FOR_ITEM_UPDATE_ALLOWED	F	During item update, if this config value is T, then the item template can be updated; if it is F item, the template cannot be changed
VALIDATE_REVISED_ITEM_REVISION	F	If this Config value is set to T, then in the MCO and SCO case, the incoming revision is either the Current or a Future implemented revision T to validate current item revision, F not to validate current item revision

**Table 10–29 (Cont.) CreateEngineeringChangeOrderListEbizProvABCImpl service**

Property	Default Value/Settings	Description
DEFAULT_STRUCTURE_TYPE	EBOM	<p>This parameter is only for the R12 case.</p> <p>If the incoming payload does not have any value for structure type, then the value specified for this config parameter will be supplied by default.</p> <p>The default value provided for this property in the AIAConfig file should be a valid structure_type in the Oracle E-Business Suite database. Use this script to retrieve a valid structure type from Oracle E-Business Suite:</p> <pre>SELECT STRUCTURE_TYPE_NAME FROM BOM_STRUCTURE_TYPES_B, where disable_date is null or disable_date &gt; sysdate</pre>
CREATE_ERP_CHANGE_ORDER	T	<p>If the value of this property is T, an ERP change order is created.</p> <p>If the value of this property is F, an Agile PLM change order is created.</p> <p>If users have set up some predefined workflow set for the change order type in Oracle E-Business Suite, then that will be effective only for the Agile PLM type of change orders.</p>
REPLICATE_BOM_VIEW_SCOPE	CURRENT_AND_FUTURE	<p>Indicates the BOM view scope for the replicate BOM case</p> <p>'ALL' -- All the BOMs should be considered for replicating BOM from source org to destination org</p> <p>'CURRENT' -- BOM that is effective currently should be considered</p> <p>'CURRENT_AND_FUTURE' -- BOM that is effective currently and also those with future effective dates should be considered</p>
REPLICATE_BOM_IMPLEMENTATION_SCOPE	All	<p>Indicates the BOM implementation scope for a replicate BOM case</p> <p>All - implemented and unimplemented BOMs</p> <p>'IMPLEMENTED' -- Implemented BOMs in the source org will be considered for replicating BOM from source org to destination org</p> <p>'UNIMPLEMENTED' -- Only unimplemented BOMs will be considered</p>
TRACE.LOG.ENABLED	false	Use tracelog for the flow
STANDALONE_BOM_UPDATES_ALLOWED	true	<p>The default value for this property is set to true so that by default, legacy BOM data can be updated by the integration.</p> <p>If only the BOMs created by this integration need to be updated (not including legacy BOMs), this property should be set to false.</p>

**Table 10-29 (Cont.) CreateEngineeringChangeOrderListEbizProvABCSImpl service**

Property	Default Value/Settings	Description
ASSIGN_DEFAULT_TEMPLATE_FROM_ICC	false	If this property is set to true and the user does not pass a template, then the ICC has a default template attached to it that will be applied to the item.  If this property is set to false, the default template attached to the ICC will not be considered.
UNIMPLEMENTED_BOM_UPDATES_ALLOWED	T or F	If this property is set to 'T' redlining of unimplemented BOM's can be done from Agile. If it is set to 'F' then only implemented BOM's can be redlined.
ALLOW_LIFECYCLE_PHASE_SKIP	T or F	If this property is set to T, the life cycle phases in EBS can be skipped. if it is set to F, the life cycle phase skip is not possible.

Table 10-30 lists the properties of the ValidateEngineeringChangeOrderListEbizProvABCSImpl service:

**Table 10-30 ValidateEngineeringChangeOrderListEbizProvABCSImpl service**

Property	Default Value/Setting	Description
Default.SystemID	EBIZ_01	Used to get the default XREF target column name when TargetId is missing in the incoming EBM
Routing.ValidateECOService.RouteToCAVS	false	Use CAVS for ValidateECOService
Routing.ValidateECOService.CAVS.EndpointURI	http://\${fp.server.soapserverhostname}:\${fp.server.soapserverport}/AIAValidationSystemServlet/syncresponsesimulator	ValidateECOService run-time EndpointURI
Routing.ValidateECOService.EBIZ_01.EndpointURI	http://\${fp.server.soapserverhostname}:\${fp.server.soapserverport}/soa-infra/services/default/ValidateEngineeringChangeOrderListEbizAdapter/ValidateEngineeringChangeOrderListEbizAdapter_ep	ValidateECOService EndpointURI when set to CAVS
Routing.EngineeringChangeOrderResponseEBS.RouteToCAVS	false	Use CAVS for EngineeringChangeOrderResponseEBS
Routing.EngineeringChangeOrderResponseEBS.CAVS.EndpointURI	http://\${fp.server.soapserverhostname}:\${fp.server.soapserverport}/AIAValidationSystemServlet/asyncresponsesimulator	EngineeringChangeOrderEBS EndpointURI when set to CAVS

**Table 10–30 (Cont.) ValidateEngineeringChangeOrderListEbizProvABCImpl service**

Property	Default Value/Setting	Description
ABCSEXTENSION.P REPROCESSABM	false	User exit for the pre-process ABM should be called
ABCSEXTENSION.P OSTPROCESSABM	false	User exit for the post-process ABM should be called
ABCSEXTENSION.P REPROCESSEBM	false	User exit for the pre-process EBM should be called
ABCSEXTENSION.P OSTPROCESSEBM	false	User exit for the post-process EBM should be called
CUSTOM.TRANSFO RMATIONS.EBM_ TO_ABM	false	Use Custom transformation for EBM to ABM
CUSTOM.TRANSFO RMATIONS.ABM_ TO_EBM	false	Use Custom transformation for ABM to EBM
ASSIGN_ITEM_TO_ CHILD_ORG	T	Indicates that if Components,SubstituteComponents coming in does not exist in context, whether org should be assigned from master org.
TEMPLATE_FOR_ ITEM_UPDATE_ ALLOWED	F	During Item Update, if this config value is T, then the item template can be updated; if it is F, the item template cannot be changed
VALIDATE_ REVISED_ITEM_ REVISION	F	If this Config value is set to T, then in MCO/SCO case, the incoming revision is either the current or a future-implemented revision
DEFAULT_ STRUCTURE_TYPE	EBOM	<p>This parameter is only for the R12 case. If the incoming payload does not have any value for structure type, then the value specified for this config parameter will be supplied by default.</p> <p>The default value provided for this property in the AIAConfig file should be a valid structure_type in the Oracle E-Business Suite database. Use this script to retrieve a valid structure type from Oracle E-Business Suite:</p> <pre>SELECT STRUCTURE_TYPE_NAME FROM BOM_STRUCTURE_TYPES_B, where disable_date is null or disable_date &gt; sysdate</pre>
CREATE_ERP_ CHANGE_ORDER	T	<p>If the value of this property is T, an Enterprise Resource Planning (ERP) change order is created.</p> <p>If the value of this property is F, an Agile PLM change order is created.</p> <p>If users have set up some predefined workflow set for the change order type in Oracle E-Business Suite, then that will be effective only for the Agile PLM type of change orders.</p>

**Table 10-30 (Cont.) ValidateEngineeringChangeOrderListEbizProvABCImpl service**

Property	Default Value/Setting	Description
REPLICATE_BOM_VIEW_SCOPE	CURRENT_AND_FUTURE	Indicates the BOM view scope for the replicate BOM case  'ALL' -- All the BOMs should be considered for replicating BOM from source org to destination org  'CURRENT' -- BOM that is effective currently should be considered  'CURRENT_AND_FUTURE' -- BOM that is effective currently and also those with future effective dates should be considered
REPLICATE_BOM_IMPLEMENTATION_SCOPE	ALL	Indicates BOM implementation scope for the replicate BOM case  All - implemented and unimplemented BOMs  'IMPLEMENTED' -- Implemented BOMs in source org will be considered for replicating BOM from source org to destination org  'UNIMPLEMENTED' -- Only unimplemented BOMs will be considered
TRACE.LOG.ENABLED	false	Use tracelog for the flow
STANDALONE_BOM_UPDATES_ALLOWED	true	The default value for this property is set to true so that by default, legacy BOM data can be updated by the integration.  If only the BOMs created by this integration need to be updated (not including legacy BOMs), this property should be set to false.
ASSIGN_DEFAULT_TEMPLATE_FROM_ICC	F	If this property is set to true and the user does not pass a template, then the ICC has a default template attached to it that will be applied to the item.  If this property is set to false, the default template attached to the ICC will not be considered.
UNIMPLEMENTED_BOM_UPDATES_ALLOWED	T or F	If this property is set to 'T' redlining of unimplemented BOM's can be done from Agile. If it is set to 'F' then only implemented BOM's can be redlined.
ALLOW_LIFECYCLE_PHASE_SKIP	T or F	If this property is set to T, the life cycle phases in EBS can be skipped. if it is set to F, the life cycle phase skip is not possible.

Table 10-31 lists the properties of the **SyncItemListEbizProvABCImpl** service:

**Table 10-31 SyncItemListEbizProvABCImpl service**

Property	Default Value / Settings	Description
Default.SystemID	EBIZ_01	Default target system to be invoked
Routing.SyncItemListEbizAdapter.RouteToCAVS	false	Controls whether SyncItemListEbizProvABCImpl should route messages to Ebiz system or to CAVS

**Table 10–31 (Cont.) SyncItemListEbizProvABCSImpl service**

Property	Default Value / Settings	Description
Routing.SyncItemListEbizAdapter.CAVS.ENDPOINTURI	http://\${fp.server.soaserverhostname}:\${fp.server.soaserverport}/AIAValidationSystemServlet/asyncresponsesimulator	URL to which messages should be routed if Routing.SyncItemListEbizAdapter.RouteToCAVS is set to True
Routing.SyncItemListEbizAdapter.EBIZ_01.ENDPOINTURI	http://\${fp.server.soaserverhostname}:\${fp.server.soaserverport}/soa-infra/services/default/SyncItemListEbizAdapter/SyncItemListEbizAdapter_ep	URL of Adapter Service that invokes process_item_list api on Ebiz instance
Routing.ItemResponse.EBSV2.SyncItemListResponse.RouteToCAVS	false	Controls whether SyncItemListEbizProvABCSImpl should route response messages to the Agile PLM system or to CAVS
Routing.ItemResponse.EBSV2.SyncItemListResponse.MessageProcessingInstruction.ENVIRONMENTCODE	PRODUCTION	Environment Code to be supplied in the Response EBM Header
Routing.ItemResponse.EBSV2.SyncItemListResponse.CAVS.ENDPOINTURI	http://\${fp.server.soaserverhostname}:\${fp.server.soaserverport}/AIAValidationSystemServlet/asyncresponsesRecipient	URL to which response messages should be routed if Routing.ItemResponseEBSV2.SyncItemListResponse.RouteToCAVS is set to True
ABCSExtension.PreFormEBMtoABMEBM	false	UserExit for PreProcess EBM
ABCSExtension.PreInvokeSyncItemListABM	false	UserExit for PreProcess AM
ABCSExtension.PostInvokeSyncItemListABM	false	UserExit for PostProcess ABM
ABCSExtension.PostXformABMtoEBMEBM	false	UserExit for PostProcess EBM
TRACE.LOG.ENABLED	false	Specifies whether logging is enabled
DEFAULT.TEMPLATE_NAME	No Default Value	
TEMPLATE_FOR_ITEM_UPDATE_ALLOWED	F	During item update, if this config value is T, then the item template can be updated; if it is F item, the template cannot be changed
DEFAULT.CATEGORYSET_NAME	NA	

**Table 10-31 (Cont.) SyncItemListEbizProvABCImpl service**

Property	Default Value / Settings	Description
DEFAULT.MASTER.ORG.CODE	Default organization code	
ASSIGN_DEFAULT_TEMPLATE_FROM_ICC	F	If this property is set to true and the user does not pass a template, then if the ICC has a default template attached to it, which will be applied to the item. If this property is set to false, the default template attached to ICC will not be considered.

[Table 10-32](#) lists the properties of the **GetConfiguratorURLEbizProvABCImpl** service:

**Table 10-32 GetConfiguratorURLEbizProvABCImpl service**

Property	Default Value/Settings
Default.SystemID	EBIZ_01
ABCSEXTENSION.PREPROCESSABM	false
ABCSEXTENSION.POSTPROCESSABM	false
ABCSEXTENSION.PREPROCESSEBM	false
ABCSEXTENSION.POSTPROCESSEBM	false
CUSTOM.TRANSFORMATIONS.EBM_TO_ABM	false
CUSTOM.TRANSFORMATIONS.ABM_TO_EBM	false
Routing.ProcessInitMsgService.EBIZ_01.EndpointURI	http:// \${fp.server.soaserverhostname}: \${fp.server.soaserverport}/soa-infra/services/default/GetConfiguratorURLEbizAdapter/GetConfiguratorURLEbizAdapter_ep
Routing.ProcessInitMsgService.RouteToCAVS_S	false
Routing.ProcessInitMsgService.CAVS.EndpointURI	http:// \${fp.server.soaserverhostname}: \${fp.server.soaserverport}/AIAValidationSystemService/asyncresponserecipient
Routing.BillOfMaterialsConfigurationEBS.GetConfiguratorURL.RouteToCAVS	false
Routing.BillOfMaterialsConfigurationEBS.GetConfiguratorURL.CAVS.EndpointURI	http:// \${fp.server.soaserverhostname}: \${fp.server.soaserverport}/AIAValidationSystemService/asyncresponserecipient
CONFIGURATOR_RETURN_URL	http:// \${fp.server.soaserverhostname}: \${fp.server.soaserverport}/EBIBOMConfigurator/ebibomconfigreturn servlet
CONFIGURATOR_APPLICATION_ID	401
CONFIGURATOR_RESPONSIBILITY_ID	66935
TERMINATE_MSG_BEHAVIOUR	full
TRACE.LOG.ENABLED	false

### 10.5.3.2 Requester ABCS

Table 10-33 lists the properties of the `UpdateItemListEbizReqABCImpl` service:

**Table 10-33 UpdateItemListEbizReqABCImpl service**

Property	Default Value/Setting	Description
Default.SystemID	EBIZ_01	Used to get the default XREF target column name when TargetId is empty in the incoming EBM
Routing.GetItemAttrListService.GetItemService.RouteToCAVS	false	Use CAVS for getItemAttrListService
Routing.GetItemAttrListService.GetItemService.CAVS.EndpointURI	http://\${fp.server.soaserverhostname}:\${fp.server.soaserverport}/AIAValidationSystemServlet/syncresponsesimulator	Use CAVS for ItemEBSV2
Routing.GetItemAttrListService.EBIZ_01.EndpointURI	http://\${fp.server.soaserverhostname}:\${fp.server.soaserverport}/soa-infra/services/default/QueryItemListEbizAdapter/QueryItemListEbizAdapter_ep	getItemAttrListService run-time target endpoint URI
Routing.ItemEBS.UpdateItemListEBM.RouteToCAVS	false	ItemEBSV2 run-time target endpoint URI
Routing.ItemEBS.UpdateItemListEBM.CAVS.EndpointURI	http://\${fp.server.soaserverhostname}:\${fp.server.soaserverport}/AIAValidationSystemServlet/asyncresponsesimulator	getItemAttrListService endpoint URI when set to CAVS
Routing.ItemEBS.EBIZ_01.EndpointURI	http://\${fp.server.soaserverhostname}:\${fp.server.soaserverport}/soa-infra/services/default/ItemEBSV2/ItemEBSV2_ep	ItemEBSV2 endpoint URI when set to CAVS
CUSTOM_TRANSFORMATIONS	false	Used to determine whether custom transformations should be used
ASSET_ATTRS	T	When the property is set to T, all Asset attributes will be published in output EBM
BOM_ATTRS	T	When the property is set to true, all BOM attributes will be published in output EBM
COSTING_ATTRS	T	When the property is set to true, all Costing attributes will be published in output EBM
GPLAN_ATTRS	T	When the property is set to T, all Planning attributes will be published in output EBM
INVENTORY_ATTRS	T	When the property is set to T, all Inventory attributes will be published in output EBM

Table 10-33 (Cont.) *UpdateItemListEbizReqABCImpl* service

Property	Default Value/Setting	Description
INVOICE_ATTRS	T	When the property is set to T, all Invoice attributes will be published in output EBM
LEAD_TIME_ATTRS	T	When the property is set to T, all Lead Times attributes will be published in output EBM
MPSMRP_ATTRS	T	When the property is set to T, all MPS/MRP Planning attributes will be published in output EBM
ORDER_ATTRS	T	When the property is set to T, all Order attributes will be published in output EBM
PHYSICAL_ATTRS	T	When the property is set to T, all Physical attributes will be published in output EBM
PROCESS_ATTRS	T	When the property is set to T, all Process attributes will be published in output EBM
PURCHASING_ATTRS	T	When the property is set to T, all Purchasing attributes will be published in output EBM
RECEIVING_ATTRS	T	When the property is set to T, all Receiving attributes will be published in output EBM
SERVICE_ATTRS	T	When the property is set to T, all Service attributes will be published in output EBM
WEB_OPTION_ATTRS	T	When the property is set to T, all Web Option attributes will be published in output EBM
WIP_ATTRS	T	When the property is set to T, all Work In progress attributes will be published in output EBM
ITEM_ATTRS	T	When the property is set to T, all Item attributes will be published in output EBM
DEFAULT_ITEM_COST_GROUP	If this value is given, then the cost will be derived based on this value  <b>Note:</b> Either DEFAULT_ITEM_COST_TYPE or DEFAULT_ITEM_COST_GROUP should be set but not both	
DEFAULT_ITEM_COST_TYPE	1	If this value is given, the cost will be derived based on this value  <b>Note:</b> Either DEFAULT_ITEM_COST_TYPE or DEFAULT_ITEM_COST_GROUP should be set but not both
TRACE.LOG.ENABLED	false	Use tracelog for the flow
ABCSEXTENSION.PREPROCESSABM	false	User exit for the pre-process ABM should be called
ABCSEXTENSION.POSTPROCESSABM	false	User exit for the post-process ABM should be called

**Table 10–33 (Cont.) UpdateItemListEbizReqABCImpl service**

Property	Default Value/Setting	Description
ABCSEXTENSION.P REPROCESSEBM	false	User exit for the pre-process EBM should be called
ABCSEXTENSION.P OSTPROCESSEBM	false	User exit for the post-process EBM should be called

**Table 10–34** lists the properties of the **UpdateEngineeringChangeOrderEbizReqABCImpl** service:

**Table 10–34 UpdateEngineeringChangeOrderEbizReqABCImpl service**

Property	Default Value/Setting	Description
Default.SystemID	EBIZ_01	Used to get the default XREF target column name when TargetId is missing in incoming EBM
Routing.GetUpdateEngineeringChangeOrderListService.UpdateEngineeringChangeOrderListService.RouteToCAVS	false	Use CAVS for getUpdateEngineeringChangeOrderListService
Routing.GetUpdateEngineeringChangeOrderListService.UpdateEngineeringChangeOrderListService.CAVS.EndpointURI	http://\${fp.server.soaserverhostname}:\${fp.server.soaserverport}/AIAValidationSystemServlet/syncresponsesimulator	Use CAVS for EngineeringChangeOrderEBS
Routing.GetUpdateEngineeringChangeOrderListService.EBIZ_01.EndpointURI	http://\${fp.server.soaserverhostname}:\${fp.server.soaserverport}/soa-infra/service/default/QueryEngineeringChangeOrderListEbizAdapter/QueryEngineeringChangeOrderListEbizAdapter_ep	getUpdateEngineeringChangeOrderListService run-time target endpoint URI
Routing.EngChangeOrderEBS.UpdateEngineeringChangeOrderList.RouteToCAVS	false	EngineeringChangeOrderEBS run-time target endpoint URI
Routing.EngChangeOrderEBS.UpdateEngineeringChangeOrderList.CAVS.EndpointURI	http://\${fp.server.soaserverhostname}:\${fp.server.soaserverport}/AIAValidationSystemServlet/asyncresponsesimulator	getUpdateEngineeringChangeOrderListService endpoint URI when set to CAVS

**Table 10-34 (Cont.) UpdateEngineeringChangeOrderEbizReqABCImpl service**

Property	Default Value/Setting	Description
Routing. ECOEnginee ringChangeOrderEBS .EBIZ_01.EndpointURI	http:// \${fp.server.so aserverhostname} : \${fp.server.soaserverpor t} / soa-infra / services / default / Engineerin gChangeOrderEBS / E ngineeringChangeOr derEBS_ep	EngineeringChangeOrderEBS endpoint URI when set to CAVS
CUSTOM_ TRANSFORMATION S	false	Used to determine whether custom transformations should be used
INCLUDE_ REVISED_ ITEMS	T	Having a single Boolean Char value (T/F), this property is passed to the Pl/Sql API based on the value of the property Revised Item details are supplied in the output ABM
INCLUDE_ COMPONENT_ ITEMS	T	Having with a Boolean Char value (T/F), this property is passed to the Pl/Sql Application Programming Interface (API) based on the value of the property Component. Item details are supplied in the output ABM
INCLUDE_ SUBSTITUTE_ COMPONENTS	T	Having a single Boolean Char value (T/F), this property is passed to the Pl/Sql API based on the value of the property Substitute item details are supplied in the output ABM
INCLUDE_ REFERENCE_ DESIGNATORS	T	Having a single Boolean Char value (T/F), this property is passed to the Pl/Sql API based on the value of the property Reference Designators of the Component item details are supplied in the output ABM
ABCSEXTENSION.P REPROCESSABM	false	User exit for the pre-process ABM should be called
ABCSEXTENSION.P OSTPROCESSABM	false	User exit for the post-process ABM should be called
ABCSEXTENSION.P REPROCESSEBM	false	User exit for the pre-process EBM should be called
ABCSEXTENSION.P OSTPROCESSEBM	false	User exit for the post-process EBM should be called
TRACE.LOG.ENABLED	false	Use tracelog for the flow

Table 10-35 lists the properties of the **UpdateItemBalanceListEbizReqABCImpl** service:

**Table 10-35 UpdateItemBalanceListEbizReqABCImpl service**

Property	Value/Setting	Description
Default.SystemID	EBIZ_01	Used to get the default XREF target column name when TargetId is missing in incoming EBM

**Table 10–35 (Cont.) UpdateItemBalanceListEbizReqABCImpl service**

Property	Value/Setting	Description
Routing.ItemBalanceService.GetItemBalanceService.RouteToCAVS	false	Use CAVS for ItemBalanceService
Routing.ItemBalanceEBS.UpdateItemBalanceList.RouteToCAVS	false	Use CAVS for ItemBalanceEBS
Routing.ItemBalanceService.GetItemBalanceService.CAVS.EndpointURI	http://\${fp.server.oserverhostname}:\${fp.server.oserverport}/AIAValidationSystemServlet/syncresponsesimulator	ItemBalanceService endpoint URI when set to CAVS
Routing.ItemBalanceEBS.UpdateItemBalanceList.CAVS.EndpointURI	http://\${fp.server.oserverhostname}:\${fp.server.oserverport}/AIAValidationSystemServlet/asyncresponsesimulator	ItemBalanceEBS endpoint URI when set to CAVS
ItemBalanceService.EBIZ_01.Default.Target.EndpointURI	http://\${fp.server.oserverhostname}:\${fp.server.oserverport}/soa-infra/services/default/QueryItemBalanceListEbizAdapter/QueryItemBalanceListEbizAdapter_ep	ItemBalanceService run-time target endpoint URI
ItemBalanceEBS.EBIZ_01.Default.Target.EndpointURI	http://\${fp.server.oserverhostname}:\${fp.server.oserverport}/soa-infra/services/default/ItemBalanceEBS/ItemBalanceEBS_ep	ItemBalanceEBS run-time target endpoint URI
CUSTOM_TRANSFORMATION_S	false	Used to determine whether custom transformations should be used
TRACE.LOG.ENABLED	false	Use tracelog for the flow
ABCSEXTENSION.PREPROCESSABM	false	User exit for the pre-process ABM should be called
ABCSEXTENSION.POSTPROCESSABM	false	User exit for the post-process ABM should be called
ABCSEXTENSION.PREPROCESSEBM	false	User exit for the pre-process EBM should be called
ABCSEXTENSION.POSTPROCESSEBM	false	User exit for the post-process EBM should be called

[Table 10–36](#) lists the properties of the **SyncBillOfMaterialsConfigurationListEbizReqABCImpl** service:

**Table 10-36 SyncBillOfMaterialsConfigurationListEbizReqABCImpl service**

Property	Default Value/Setting
Default.SystemID	EBIZ_01
ABCSEXTENSION.PREPPROCESSABM	false
ABCSEXTENSION.PREPSESSEBM	false
CUSTOM.TRANSFORMATIONS.ABM_TO_EBM	false
Routing.BillOfMaterialsConfigurationEBS.Syn cBillOfMaterialsConfigurationList.RouteToCA VS	false
Routing.BillOfMaterialsConfigurationEBS.Syn cBillOfMaterialsConfigurationList.CAVSEndp ointURI	http:// \${fp.server.soaserverhostname}: \${fp.se rver.soaserverport} / AIAValidationSystemSer vlet /asyncresponsercipient

### 10.5.3.3 BPEL Service

Table 10-37 lists the properties of the **GenerateItemNumberService** service:

**Table 10-37 GenerateItemNumberService service**

Property	Default Value/Setting	Description
Routing.GenerateItemNumberService.EBI Z_01.EndpointURI	http:// \${ebiz.host}: \${ebiz.port} / webservices/AppsWSProvider /oracle/apps/inv/ebi/item/GenerateItem NumberService	NA
Routing.GenerateItemNumberService.CAVS.EndpointURI	http:// \${fp.server.soaserverhostname}: \${fp.server.soaserverport} / AIAValidationSystemServlet /asyncresponsesimulator	NA
Routing.GenerateItemNumberService.RouteToCAVS	false	NA

## 10.6 Setting Up NLS

National language support (NLS) has been implemented in the pre-built integration for Agile PLM to Oracle E-Business Suite integration.

### 10.6.1 Requester Flows

1. In all the requester flows, the language code is managed from the concurrent program.
2. Configure the profile option called EBS Integration Language Codes with the installed languages in Oracle E-Business Suite using comma-separated values, for example, US, KO.

---

**Note:** In AIA, only one language is in the Oracle E-Business Suite Integration profile option for reverse flow. This is because in Agile PLM, the filtering and routing is carried out based on the language code in the EBS layer. Agile PLM does not send any response to Oracle E-Business Suite Integration Requester ABCS for the language that is not the same as the one configured on the Agile PLM side.

---

3. In AIA Release 2.3 PIP, the value of the Apps User is set from the Configuration file. However, from AIA Release 2.4 PIP onwards, a new DVM EBIZ\_AGILE\_APPS\_USER, with the columns LANG\_CODE and USER\_NAME, is used. The value of the Apps User is set based on the language code returned by the concurrent program.

Before the EBM is sent to Agile PLM, the language code is converted to the common value, which is configured from the DVM LANGUAGE\_CODE. The default integration user is picked from the AIA configuration file. In the module level Oracle E-Business Suite, the default user is picked from the USER property.

---

**Note:** Ensure that the values are configured for the DVM LANGUAGE\_CODE and EBIZ\_AGILE\_APPS\_USER before the flows are triggered.

---

4. For the Update Engineering change order, you can use two ways to invoke the Requester ABCS. One is through the concurrent program and the other is through the inbound adapter Events, called the Business Events.

In AIA Release 2.3 PIP, a change in ECO status returns the SID and the Change ID as an input to the Requester ABCS. However, from AIA Release 2.4 PIP onwards, another field called Language\_Code has been added to enter parameters in the transformations, which has a default value as US. If you want to update this for Multi Languages, you must run the Publish Engineering Change Order concurrent program.

## 10.6.2 Provider Flows

In the AIA Release 2.3 PIP, the default language code in Agile PLM is set to en-US. This code value is sent to the provider ABCS in Oracle E-Business Suite without any conversion. However, from AIA Release 2.4 PIP onwards, this language code from Agile Product Lifecycle Management (PLM) is converted to an Oracle E-Business Suite system value by means of the LANGUAGE\_CODE DVM.

This language code value is then used for setting up the APPS user in the EBIZ\_AGILE\_APPS\_USER DVM. If the language code does not exist in this DVM, the default user is set from the AIA configuration file.

---

**Note:** The steps that are provided are specific to NLS. Carry out all the prerequisite configuration steps before testing the flows. EBS Integration Language Codes is a prerequisite field to be configured with value with the appropriate Language Code. Besides, in AIA Release 2.4 PIP, the language code configured in Agile PLM should be configured in EBS exactly. That is, if Agile PLM is configured with Korean (KO) then the EBS Integration Language Codes should be configured with KO because Agile PLM would accept only the Korean data. Configure ECO\_STATUS\_CODE and ITEM\_STATUS\_CODE with the corresponding Language values in the Agile PLM column (the column name Common).

---

### 10.6.3 Setting Up NLS in Agile PLM

1. In Agile PLM Java Client, for each subscriber of MCO, SCO, and ECO, navigate to the subscriber details page and set the language.
2. Change the language preference of all users who are creating change orders and items, including integration users, to Japanese.

---

**Note:** For easy comprehension, we are using Japanese as a sample language.

---

### 10.6.4 Setting Up NLS in FMW for Agile PLM

#### Editing Transformations

1. Edit the following eXtensible Stylesheet Language (XSL) file and replace the hard-coded string Preliminary to the Japanese equivalent coming from the Agile PLM list values.

```
<SOA_
HOME>/Apache/Apache/htdocs/AIAComponents/Transformations/Agile
PLM/Release1/QueueProcessorServiceImpl/AgileData_to_
AgileCreateEngineeringChangeOrderListABM_Impl.xsl
```

2. Edit the following XSL file and replace the following values:

```
<SOA_
HOME>/Apache/Apache/htdocs/AIAComponents/Transformations/Agile
PLM/Release1/ProcessEngineeringChangeOrderAgileReqABCS/AgileCreateEngi
neeringChangeOrderListABM_to_CreateEngineeringChangeOrderListEBM_
Impl.xsl
```

Replace the hard-coded string Preliminary to the Japanese equivalent coming from the Agile PLM list values.

Replace the hard-coded string SCO to the Japanese equivalent coming from the Agile PLM list values.

3. Edit the following XSL file and replace hard-coded strings Errorred with the Japanese equivalent:

```
<SOA_
HOME>/Apache/Apache/htdocs/AIAComponents/Transformations/Agile
PLM/Release1/ProcessEngineeringChangeOrderAgileReqABCS/AgileCreateEngi
neeringChangeOrderListABM_to_
AgileUpdateEngineeringChangeOrderListABM_Impl.xsl
```

4. Edit the following XSL file and replace the following values:

```
<SOA_
HOME>/Apache/Apache/htdocs/AIAComponents/Transformations/Agile
PLM/Release1/ProcessEngineeringChangeOrderAgileReqABCS/UpdateEngineer
ingChangeOrderListEBM_to_AgileUpdateEngineeringChangeOrderListABM_
Impl.xsl
```

Replace the hard-coded string Transferred with its Japanese equivalent.

Replace the hard-coded string Errorred with its Japanese equivalent.

---

**Note:** Use a UTF-8 based editor such as JEdit to perform these changes. Choose UTF-8 as the character set while loading the file to edit. Set FTP transfer mode to Binary while uploading these files to AIA components.

---

### Editing AIA Configurations

Edit the property LANG\_LOCALE under module Agile to Japanese. Its language value is available under the column COMMON in the LANGUAGE\_CODE DVM at this path:

AIA\_HOME>/aia\_instances/\$INSTANCE\_NAME/AIA metaData/config

For more information about requirements for working with AIAConfigurationProperties.xml, see *Oracle Fusion Middleware Developer's Guide for Oracle Application Integration Architecture Foundation Pack 11g Release 1, Building AIA Integration Flow, How to Set Up AIA Workstation*.

### Setting Up DVMs

Set up the required DVMs using SOA Composer. Enter the Japanese language values under the Agile PLM column AGILE\_01 in the following DVMs:

- ITEM\_PRIMARYCLASSIFICATIONCODE
- ITEM\_STATUS\_CODE
- ITEM\_UOM\_CODE
- ECO\_REASON\_CODE
- ECO\_TYPECODE
- ECO\_CLASSIFICATION\_CODE
- ECO\_STATUS\_CODE

## 10.6.5 Setting Up NLS in FMW for Oracle E-Business Suite

1. Log in to Oracle E-Business Suite.
2. Navigate to User Preferences.
3. Change the current session language and default language to the language that is configured in Agile PLM.
4. Navigate to System Administrator Responsibility in Oracle E-Business Suite and navigate to the following path:

System Administrator > Profile Options > System

5. Query for profile option EBS Integration Language Codes.

- Set the language code to the corresponding Agile PLM language.

---

**Note:** You should do a substring revision in the custom transformations on the Agile PLM or Oracle E-Business Suite side to confirm an MLS setup with a multibyte language such as Korean. If no MLS exists, a binding exception occurs during invoking the Ebiz Adapter.

---

### 10.6.6 Setting Up DVMs for NLS

- In the LANGUAGE\_CODE DVM, configure EBIZ\_01.with the appropriate language code of ORACLE EBS.
- In the EBIZ\_AGILE\_APPS\_USER DVM, configure the LANG\_CODE and the corresponding integration user under USER\_NAME.

## 10.7 Handling Errors

Based on the roles defined for the services, email notifications are sent if an error occurs. The roles can be assigned at various levels in a hierarchy (service, process, and domain) so that when a service ends due to error, the Error Handling Framework uses the role value to derive the users who have to be notified. The Error Handling Framework then notifies the users through their preferred notification method, puts the error in the user's Oracle Worklist, and records the error in the error log.

- Role: Actor role associated with the error notification. Actor roles receive notifications for and are assigned to error scenarios occurring in Oracle AIA integration flows. The task is editable in the Error Console and is meant to be worked on and resolved by the actor assigned to the task.
- FYI Role: FYI role associated with the error notification. This role receives for-your-information (FYI) notifications for error scenarios occurring in Oracle AIA integration flows. An example of an FYI role is a customer service representative. The task is displayed in read-only view in the Error Console.

For more information about the errors caused by the applications Agile PLM and Oracle E-Business Suite, see the documentation for the respective product.

For more information about AIA error handling, see *Oracle Fusion Middleware Infrastructure Components and Utilities User's Guide for Oracle Application Integration Architecture Foundation Pack 11g Release 1, "Setting Up Error Handling."*

### 10.7.1 Error Handling in Pre-Built Integration Queue Manager

Any failure in the processing of a change order is captured by Queue Manager. This Errorred process can be identified in Queue Monitor, symbolized by.

To see the reason for the error, click the link Errorred in the Process Status column.

This Error Message comprises two parts:

- Error Text - This is the description of the error source, which can be from any of the participating ABCS services that faulted.
- Details - The error details consist of:
  - Service Name: The name of the service where an instance failed to run
  - Instance ID: The identification number of the instance that failed

Multiple faults generated by the service are captured and displayed in this UI. In addition to this, any failures in the flows are captured in the AIA Error Logs. These can be seen from the Enterprise Manager Console logs section.

In an event in which a certain service is down and the error is not related to the payload, users can resubmit the change in the Queue Manager UI.

## 10.8 Viewing EBO EIMs

For more information about using XSL Mapping Analyzer (XMAN), see *Oracle Fusion Middleware Infrastructure Components and Utilities User's Guide for Oracle Application Integration Architecture Foundation Pack 11g Release 1, Using the XSL Mapping Analyzer*.

For more information about how services are mapped, see the My Oracle Support document: *EBO Implementation Maps (EIMs)* 1095494.1.

## 10.9 Setting Up for Change Order Creation in Released Status in EBS

OOTB ECO will be released from Agile in *Released* status and it must be created in *Scheduled* status, so that ECO\_STATUS\_CODE DVM *Released* status of Agile is mapped to the **SCHEDULED** value of the **COMMON** Column.

To create a change order in EBS in *Released* status:

1. Apply EBS patch 12895719:R12.ENG.C on EBS host.
2. In Fusion Middleware, update the **COMMON** and **AGILE\_01** columns of the ECO\_STATUS\_CODE DVM.

[Table 10-38](#) shows the old settings.

[Table 10-39](#) shows the new settings.

**Table 10-38 ECO\_STATUS\_CODE DVM Old Settings**

EBIZ_01	COMMON	AGILE_01
4	SCHEDULED	Released
6	IMPLEMENTED	Implemented
7	RELEASED	

**Table 10-39 ECO\_STATUS\_CODE DVM New Settings**

EBIZ_01	COMMON	AGILE_01
7	SCHEDULED	Released
6	IMPLEMENTED	Implemented
4	RELEASED	

3. Save the DVM changes.

After completing these steps, you can create change orders in *Released* status in EBS using the Agile Product Lifecycle Management (PLM) integration for Oracle E-Business Suite.

# A

## Functionalities Available

This appendix provides functionalities available across different versions of Agile PLM and Oracle E-Business Suite application combination deployments.

**Table A-1 Agile Functionalities for Combination Deployment**

Features and Agile PLM + Oracle E-Business Suite Versions	Agile PLM 9226 + EBS 11.5.10	Agile PLM 9226 + EBS 12.1.x	Agile PLM 93 + EBS 11.5.10	Agile PLM 93 without VM + EBS 12.1.x	Agile PLM 9226 + EBS 12.1.x with PIM	Agile PLM 93 without VM + EBS 12.1.x with PIM	Agile PLM 93 with VM + EBS 12.1.x with PIM	Agile PLM 93 with VM + EBS 12.1.x
NPR (Action PX)	N	N	N	N	Y	Y	Y	N
		(Deployed - shared with SyncItem)		(Deployed - shared with SyncItem)		(Deployed - shared with SyncItem)		(Deployed - shared with SyncItem )
NPR (Auto Number PX)	N	N	N	N	Y	Y	Y	N
		(Deployed - shared with SyncItem)		(Deployed - shared with SyncItem)		(Deployed - shared with SyncItem)		(Deployed - shared with SyncItem )
PREL(ECO Forward Flow	Y	Y	Y	Y	Y	Y	Y	Y
From Agile PLM to EBS)								
ECO Update Flow	Y	Y	Y	Y	Y	Y	Y	Y
(From EBS to Agile PLM)								

**Table A-1 (Cont.) Agile Functionalities for Combination Deployment**

Features and Agile		Agile PLM 9226 + EBS 11.5.10		Agile PLM 93 without VM + EBS 12.1.x		Agile PLM 9226 + EBS 12.1.x with PIM		Agile PLM 93 without VM + EBS 12.1.x with PIM		Agile PLM 93 with VM + EBS 12.1.x with PIM		Agile PLM 93 with VM + EBS 12.1.x	
PLM + Oracle E-Business Suite Versions	Agile PLM	Agile PLM	Agile PLM	Agile PLM	Agile PLM	Agile PLM	Agile PLM	Agile PLM	Agile PLM	Agile PLM	Agile PLM	Agile PLM	Agile PLM
Item Balance Update Flow (From EBS to Agile PLM)	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Item Operational Attribute Update Flow (From EBS to Agile PLM)	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Queue Functionality	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
AQ (Database Persistent)													
Sync Item	N	Y	N	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
VM Configuration Integration	N	N	N	N	N	N	N	N	Y	Y	Y	Y	Y
Pre-Release Audit	N	Y	N	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y

# B

---

## Queue Management

This appendix provides information on queue management.

The Queue Management feature in the process integration pack (PIP) helps you meet the following requirements:

- An event exists to produce filtered payload from a file destination to a JMS destination.
- The payload is defined by means of a standard XSD.
- The files or JMS messages produced by events are sequenced in the order in which the objects are released.

---

**Note:** These requirements are leveraged by means of the Agile PLM Content Service (ACS). ACS can produce payload to a file or JMS destination. The payload is based on filter configured for the ACS event defined by an Agile PLM-provided AXML schema definition. In addition, ACS transmits the messages in the order in which the ATOs are released.

---

- A queue manages the order of messages
- A queue monitors UI to enable reordering and resubmitting unprocessed messages
- The queue manages the payloads based on the business process for which the message is produced by the event
- The queue controlling mechanism:
  - Triggers the business flow based on the business process of message
  - Processes the messages sequentially based on the order specified in the message (the highest-order message is picked first for processing)
  - Does not pick a message for processing unless the processing of the previous message is complete
  - Can reorder the messages that have not been picked for processing

**For more information** about Queue Manager, see *Agile PLM Integration Pack for Oracle E-Business Suite User Guide*.

## B.1 Managing the Process Queues

The integration of Change Order Release process between Agile PLM and Oracle Enterprise Business Services system is driven by Process Queue Controller. In order to maintain integrity of data in the ERP system, it is essential that Change Orders be transferred to that system in the order in which they were released by the source system. In the absence of such sequencing, BOM data can go out of sync between the two systems.

Since ERP systems, like Oracle, make it mandatory for successive item revisions to follow an ASCII progression of characters, it is essential for this sequence to be maintained.

For example, if for the same revised item, two successive Change Orders are released, and the second one is created first in the ERP system, the revision number of the first one (if smaller in ASCII value than that of the latter, which is mostly the case in Agile) will subsequently be prohibited from being created in the ERP system. Worse problems can occur if the two ECOs make successive changes to the same BOM line, or if the subsequent ECO is dependent on the first one.

### B.1.1 Queuing

When an aXML file containing Change Order information is received by the integration for processing through the Change Order Release process, the first step that needs to be carried out is to queue it for processing. aXML files are queued in the order in which they are received (FIFO). Agile application ensures that aXML files are pushed in the order that Change Orders are released.

The chronological order of receiving aXML files, (or, alternately, the ASCII sequence of aXML file names), is used to determine the sequence in which incoming XML will be processed by the integration. In some cases, aXML for multiple processes (such as NPR process, any other legacy process, etc.) may be published to the same location, in which case the integration performs an extra step of determining what the contents of the aXML are, in order to determine what flow does it trigger – only the aXML files belonging to the Change Order Release flow are to be queued.

By default, the aXML is queued at the back of the queue with an initial status of *Pre-Processing*. At this time, the initial pre-processing is carried out, as described in #1 above, after which the integration changes the status of that aXML to *Pending Processing*.

At a given time, only one Change Order, i.e., the first one in the queue, undergoes ERP processing. At this stage, the status of that aXML file changes to *Processing*. When a Change Order errors out during ERP processing, it remains ahead of the queue in an errored status. All further change orders are not processed until the errored change is manually moved out of the queue by the Integration Administrator. When a Change Order completes ERP processing successfully, it automatically moves out of the queue by the integration (for example, by changing the status to *Post Processing*), and the next Change Order in the queue begins ERP processing.

Note that the change that has completed ERP processing still needs to carry out postprocessing.

However, any errors encountered during post-processing cause the Change Order to complete with a *Warning* status, and not with an *Error*.

Manually moving the errored change out of the queue can be done in one of two ways:

1. The integration administrator can *De-queue* the Change Order. This operation moves the Change Order out of the queue and saves it in the repository of

*Unprocessed Change Orders.* The next Change Order in queue is then picked up for processing through the Change Order process flow.

2. The integration administrator can *Reprocess* the Change Order. This operation immediately re-starts the integration process flow for that change order. Prior logs are wiped out, but the original aXML input provided by Agile is used. The pre-processing need not be repeated for such a change – the integration process resumes from the *Processing* stage.

## B.1.2 Change Order Process Flow

The Change Order Release process flow can be broken down into two major stages:

### 1. Process ECO

- ABM to EBM transformations
- Invoke Provider
- Receive Response
- Send Response to the Queue

**Table B-1 Flow of Change Order Process between ESB and BPEL**

Sequence	ESB	BPEL
1	ACS AXML JMS Consumer polls on JMS Queue and invokes CreateQueueServiceABCS by sending the binary compressed aXML file.	
2	DB trigger is used for ECO Queue creation and giving them a sequence number	ECO Queue Control
3	Queue Processing Service polls on Queue Control table for pending rows and invokes QueueProcessorServiceImpl	<p>QueueProcessorServiceImpl</p> <ul style="list-style-type: none"> <li>▪ updates the status of ECO (processing)</li> <li>▪ carries out aXML to ABM transformations</li> <li>▪ invokes RequesterABCS (Process ECO) using ABM</li> <li>▪ receives the response from RequesterABCS</li> <li>▪ updates the status of ECO (Completed or Errored)</li> </ul>
4	CreateQueueService <ul style="list-style-type: none"> <li>▪ polls completed ECO on Queue Control Table</li> <li>▪ deletes the completed ECO from Queue Control Table</li> <li>▪ copies the highest priority pending ECO from Queue to the Queue Control Table</li> </ul>	

**2. Post-Process ECO**

- Update transfer status in Agile

It must be noted that a conflict can occur only when data is actually being transferred to the ERP system, and not when parsing aXML or after the processing in ERP has finished.

**B.1.3 The Process Queue Manager**

If the pending ECOs are not being picked up for processing, there could be a possibility that some other user may have suspended the queue. To verify this, log in-out and then re-login. If the Suspend button is disabled, then you may resume the queue. By default, the queue remains in suspended state after PIP installation. You are required to initialize it for the first time by clicking **Resume**.

1. View the Automated Transfer Objects (ATO)
2. View the Process States. These states are:
  - Processing
  - Pending
  - Completed
  - Errorred (failed)
3. View the Release Time and Processed Time of processed COs.
4. View the unprocessed COs.
5. View the deleted processes.
6. View the errored processes and their error details.
7. Suspend and resume the queuing operation.
8. Change the processing sequence in the queue, i.e., move the position of an object up and down the queue.
9. Remove the COs, selectively, from the processing queue.
10. Resubmit the removed COs for processing.
11. Filter the view on various criterion, such as, all COs that are pending.
12. Purge data from the list of change orders that have been processed successfully.

**B.2 User Interface**

The following user interface components are available when working with queues:

- Accessing the Process Queue Monitor
- Fields and Attributes
- Filters


**B.2.1 Accessing the Process Queue Monitor**

The Process Queue Monitor (User Interface) is deployed at your Integration Server and can be accessed through web browser.

The Integration Administrator is provided with its URL, together with login ID and password. After you login, you can see a page similar to the one below:

When a Change Order is released, it is picked up by the Queue Controller, which assigns it an Automated Transfer Object (ATO) Number before passing it on for processing. The Queue Monitor displays this ATO number as Reference Number.

**Figure B-1 Process Queue Monitor**

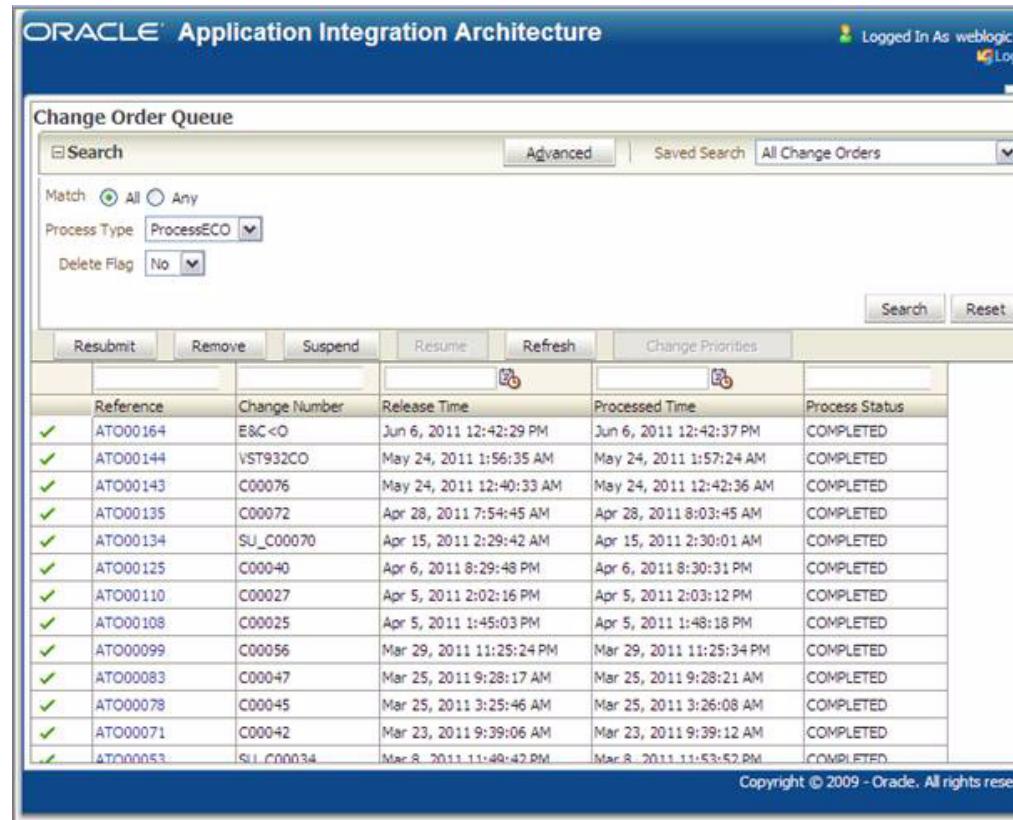

## B.2.2 Fields and Attributes

The Fields and Attributes component includes the Change Order Queue Monitor description.

### B.2.2.1 Change Order Queue Monitor

The Change Order Queue is a tabular display of the released orders lined up by Queue Manager for processing. Each row in this table is a Change Order. The first row denotes the 'first-in-sequence' Change Order, when it is in *Pending* state of processing.

**Table B-2 Change Order Queue**

Columns	Descriptions
Row Select	To select rows, click on a row. To select multiple rows, click on a row and hold the Ctrl button and click on any additional rows. Selecting rows can be used when (a) re-ordering (only messages at a PENDING status that have not been removed), (b) removal, (c) resubmission. In such cases, this column gets visible and contains a checkbox. This column remains invisible for 'Completed' Process States.

**Table B-2 (Cont.) Change Order Queue**

Columns	Descriptions
Reference	The Automated Transfer Object Number (hence the prefix 'ATO') assigned to a Change Order by Agile Content Server (ACS). It is unique and corresponds to a unique Change Order. The Number of the corresponding Changer Order is displayed under the 'Change Number' column.
Change Number	This is a unique number assigned to a Changer Order in Agile system at the time of its creation. Its prefix denotes the type of Change, such as, ECO for Engineering Change Order.
Release Time	The Date and Time when an Order is released by ACS to the Process Queue Manager. Internally, its the Date and Time when the Process Queue Controller picks up an Order and puts it in the Queue.
Processed Time	The Date and Time when an Order attains a particular Process Status (last column).
Process Status	The State of a process - Processing, Pending, Completed, Errorred.

Figure B-2 shows the process denoters and their functions:

**Figure B-2 Process Denoters**

Completed	✓
Pending	●
Processing	✳
Errorred	⚠
Completed and Removed	✓ ✘
Pending and Removed	● ✘
Processing and Removed	✳ ✘
Errorred and Removed	⚠ ✘

### B.2.2.2 Queue Operators

This section provides a list of queue operators and their operations.


**Table B-3 Queue Operettas and Operations**

Buttons/Links	Operations
Resubmit	This button is used for resubmitting the Pending Processes that were removed from the Queue. Or for resubmitting the Errorred Processes that you would like to resubmit.
Remove	This button is used for removing any processes from the Queue. The removed processes still exist in the database, and can be resubmitted for processing. (i.e. view records where the Delete Flag is equal to Yes).

**Table B-3 (Cont.) Queue Operettas and Operations**

Buttons/Links	Operations
Suspend	This button is used for suspending the Queue, temporarily, for removing, resubmitting or reordering the Pending Processes. It remains disabled when the Queue is inactive, i.e., when the Queue is in Suspended mode and has not been resumed. By default, the Queue remains in Suspended state after PIP installation. You are required to 'initialize' it for the first time by clicking Resume button. The queue suspends the ProcessECO and ValidateECO records independently of each other. If the Process Type is equal to ProcessECO when you click the Suspend button, only the ProcessECO records will be suspended, the ValidateECO record will not be suspended and will continue to be processed.
Resume	This button is used for resuming the suspended Queue. It remains disabled when the Queue is active, i.e., its not in suspended mode. The queue resumes the ProcessECO and ValidateECO records independently of each other. If the Process Type is equal to ProcessECO when you click the Resume button, only the ProcessECO records will be resumed, the ValidateECO record will not be resumed and will continue to be suspended.
Refresh	This button is used for refreshing the Queue to get a list of freshly added processes and to see the change in process status. The process status is not automatically refreshed. Also, the new processes do not automatically appear in the Queue. This search and refresh button will work identically.
Search	This button is used for searching the Queue to get a list of freshly added processes and to see the change in process status. The new processes do not automatically appear in the Queue. It's also used if you change the search criteria in the header. This search and refresh button will work identically.
Reset	This button is used to reset the search criteria back to the default <i>Saved Search</i> criteria that is selected in the search header.
Change Priorities	This button is used to reorder processes in the Queue. This button will only be enabled when records at a Pending state are selected. Select Pending records by selecting a row and using the Ctrl button to select additional Pending rows. Once you have selected Pending records, you can click on this button and the Reorder Queue screen will open.  Changing priorities of records should always be done when the queue is in a Suspended state.
Process Reordered Records	This button is used after the move buttons have been used to reorder the queue. Once the pending records have been reordered, this button is used to process the reordered records. It will save the new priority of the records.
Cancel	This button is used to cancel any reordering you have done and will close the Reorder Queue form. The arrow buttons can be used to move a record up or down in the sequence. This should only be used when the queue is in 'suspended' mode.

[Figure B-3](#) shows the Change Priorities page

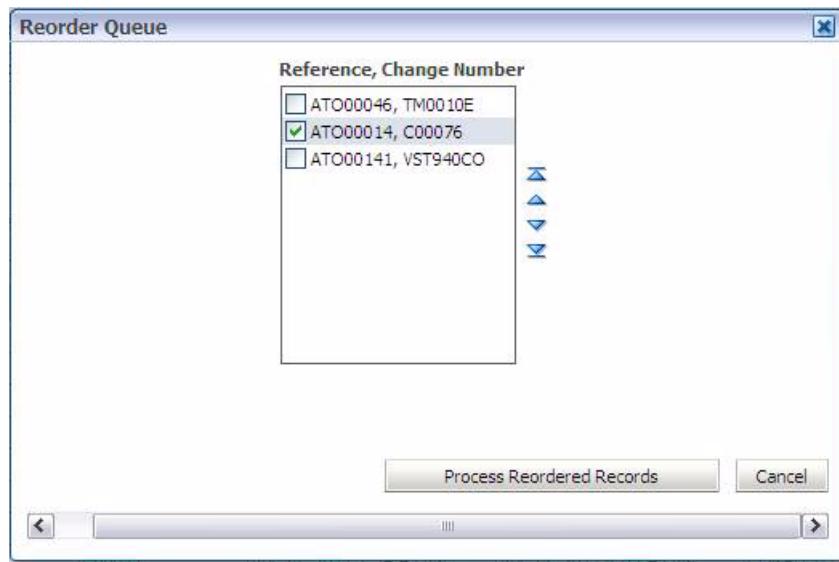**Figure B-3 Change Priorities**

### B.2.3 Filters

At any given time, a queue may have hundreds of COs under processing, depending on the size of the organization. Although, the Queue Monitor displays all of them, it gets difficult to find the specific ones that you may require to see quickly.

Queue filters facilitate display of the change orders on the basis of their processing state and further criterion. The tables below list the search criterion of the predefined Saved Search criteria. The bold text indicates the default value or operator.

**Figure B-4 Filter All Change Orders**

#### B.2.3.1 Filter 1: All Change Orders

This filter displays the complete list of all change orders in the queue.

Figure B-5 shows the search parameters to be selected to view all change orders.

**Figure B-5 All Change Orders**

Match  All  Any

Process Type **ProcessECO**

Delete Flag **No**

This table shows how to set up a filter to view all change orders:

**Table B-4 Filter Settings to View All Change Orders**

Criteria	Operator	Value
Process Type	Equals	<b>ProcessECO</b>
		ValidateECO
Delete Flag	Equals	<b>No</b>
		Yes

### B.2.3.2 Filter 2: Errored Change Orders Only

This filter displays the change orders with errors.

Figure B-6 shows the search parameters to find change order with errors.

**Figure B-6 Change Orders with Errors**

Match  All  Any

Process Status **ERRORED**

Process Type **ProcessECO**

Delete Flag **No**

**Table B-5 Filter Settings to View Change Orders with Errors**

Criteria	Operator	Value
Process Type	Equals	<b>ProcessECO</b>
		ValidateECO
Delete Flag	Equals	<b>No</b>
		Yes
Process Status	Equals	<b>ERRORED</b>
		PENDING
		COMPLETED
		PROCESSING

### B.2.3.3 Filter 3: Pending Changes Only

This filter displays the pending change orders.

[Figure B-7](#) shows the search parameters to view pending change orders.

**Figure B-7 Pending Change Orders**

This table shows how to set up a filter to view pending change orders:

**Table B-6 Filter Settings to View Pending Changes Only**

Criteria	Operator	Value
Process Type	Equals	ProcessECO
		ValidateECO
Delete Flag	Equals	No
		Yes
Process Status	Equals	PENDING
		ERRORED
		COMPLETED
		PROCESSING

### B.2.3.4 Filter 4: Completed Change Orders Only

This filter displays the completed change orders.

[Figure B-8](#) shows the search parameters to view completed change orders.

**Figure B-8 Completed Change Orders**

This table shows how to set up a filter to view completed change orders:

**Table B-7 Filter Settings to View Completed Change Orders**

Criteria	Operator	Value
Process Type	Equals	ProcessECO
		ValidateECO
Delete Flag	Equals	No
		Yes
Process Status	Equals	COMPLETED
		ERRORED
		PENDING
		PROCESSING

### B.2.3.5 Filter 5: Changes Errored Within Last Week

This filter displays the changes errored within last week.

[Figure B-9](#) shows changes which errored within last week.

**Figure B-9 Changes Errored within Last Week**

The screenshot shows a search interface with the following filter settings:

- Match: All (radio button selected)
- Process Status: Equals, ERRORED
- Process Type: Equals, ProcessECO
- Delete Flag: Equals, No
- Processed Time: Between, 6/9/2011 - 6/16/2011

This table shows how to set up a filter to view change orders that errored within last week:

**Table B-8 Filter Settings to View Changes Errored within Last Week**

Criteria	Operator	Value
Process Type	Equals	ProcessECO
	Starts With	ValidateECO
	Ends With	
	Does Not Equal	
	Less Than	
	Greater Than	
	Less Than or Equal To	
	Greater Than or Equal To	
	Between	
	Not Between	
	Contains	
	Does not contain	
	Is Not Blank	
	Is Blank	
	*Not all operators may apply to your value.	
Delete Flag	Equals	No
	Does not equal	Yes
	Less Than	
	Greater Than	
	Less Than or Equal To	
	Greater Than or Equal To	
	Between	
	Not Between	
	Is Blank	
	Is Not Blank	
	*Not all operators may apply to your value.	

**Table B-8 (Cont.) Filter Settings to View Changes Errored within Last Week**

Criteria	Operator	Value
Process Status	Equals	ERRORED
	Starts With	PENDING
	Ends With	COMPLETED
	Does Not Equal	PROCESSING
	Less Than	
	Greater Than	
	Less Than or Equal To	
	Greater Than or Equal To	
	Between	
	Not Between	
	Contains	
	Does not contain	
	Is Not Blank	
	Is Blank	
	*Not all operators may apply to your value.	
Processed Time	Between	7 days from Today's Date and Today's Date
	Equals	
	Does Not Equal	
	Not Between	
	Before	
	After	
	On or before	
	On or after	
	Is blank	
	Is not blank	

#### **B.2.3.6 Filter 6: Unprocessed Change Orders**

This table shows how to set up a filter to view unprocessed change orders:

**Table B-9 Filter Settings to View Unprocessed Change Orders**

Criteria	Operator	Value
Process Type	Equals	Process ECO
	Starts With	Validate ECO
	Ends With	
	Does Not Equal	
	Less Than	
	Greater Than	
	Less Than or Equal To	
	Greater Than or Equal To	
	Between	
	Not Between	
	Contains	
	Does not contain	
	Is Not Blank	
	Is Blank	
	*Not all operators may apply to your value.	
Process Status	Does not Equal	COMPLETED
	Starts With	ERRORED
	Ends With	PENDING
	Does Not Equal	PROCESSING
	Less Than	
	Greater Than	
	Less Than or Equal To	
	Greater Than or Equal To	
	Between	
	Not Between	
	Contains	
	Does not contain	
	Is Not Blank	
	Is Blank	
	*Not all operators may apply to your value.	

### B.2.3.7 Filter 7: All Delete Flags

This table shows how to set up a filter to view all delete flags:

**Table B-10 Filter Settings to View Delete Flags**


Criteria	Operator	Value
Process Type	Equals	Process ECO
	Starts With	Validate ECO
	Ends With	
	Does Not Equal	
	Less Than	
	Greater Than	
	Less Than or Equal To	
	Greater Than or Equal To	
	Between	
	Not Between	
	Contains	
	Does not contain	
	Is Not Blank	
	Is Blank	
	*Not all operators may apply to your value.	
Delete Flag	Equals	No
	Does not Equal	
	Less Than	
	Greater Than	
	Less Than or Equal To	
	Greater Than or Equal To	
	Between	
	Not Between	
	Is Not Blank	
	Is Blank	
	*Not all operators may apply to your value.	
Delete Flag	Equals	Yes
	Does not Equal	
	Less Than	
	Greater Than	
	Less Than or Equal To	
	Greater Than or Equal To	
	Between	
	Not Between	
	Is Not Blank	
	Is Blank	
	*Not all operators may apply to your value.	

### B.2.3.8 Advance Query Abilities

The Advance Query Abilities feature allows you search for queries using advanced search parameters. You can use the advanced query abilities by clicking the **Advance Query Abilities** button. This button can be used when advanced searching is required and if the pre-defined saved searches do not meet your needs. When this button is pressed, the **Add Fields** button is added next to the **Reset** button. Additional fields can be added to your current search criteria.


**Example:** If the All Change Orders default search criteria was being used, you could also select Change Number from the list below:

**Figure B-10 Advance Query Abilities**

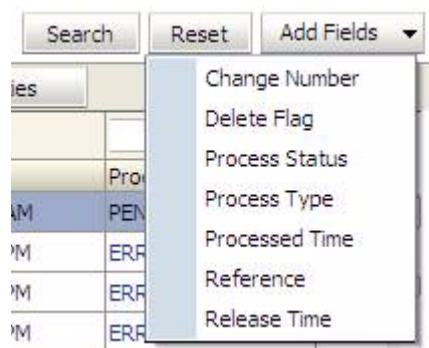

Then the Change Number will be added to your search criteria. The operator and value can then be entered and a search can be performed. The X button can then be used to delete that additional field. Or the reset button can use to reset your criteria back to the Saved Search criteria.

**Figure B-11 Search Parameters**

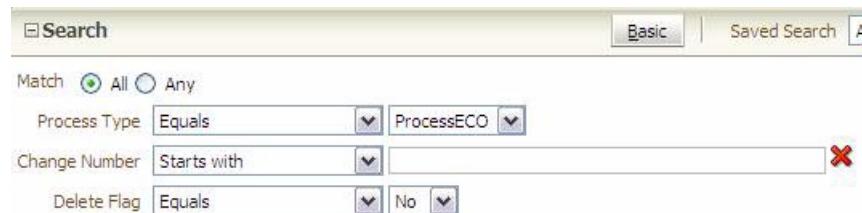

In addition to the header search criteria, each column in the table (Reference, Change Number, Release Time, Processed Time, Process Status) has a QBE Line that can also be used as a filter.

## B.3 Functions

The Queue Monitor facilitates an administrator to perform the following on a Change Order:

- Queue Management Solution
- Queue Controller
- Queue Monitor


## B.4 Queue Management Solution

The Queue Management Solution comprises of the following components:

- Queue DB: The database that keeps the data related to the queue messages.
- Queue Controller: Polls for new event payloads and adds them to the Queue DB. The highest priority message for each business process is picked and processed sequentially to trigger its business flow.
- Queue Monitoring: UI that monitors the queue message status supports reordering of priorities of the queue messages.

In addition, it provides the capability to resubmit the unprocessed messages.

**Figure B-12 Queue monitoring**

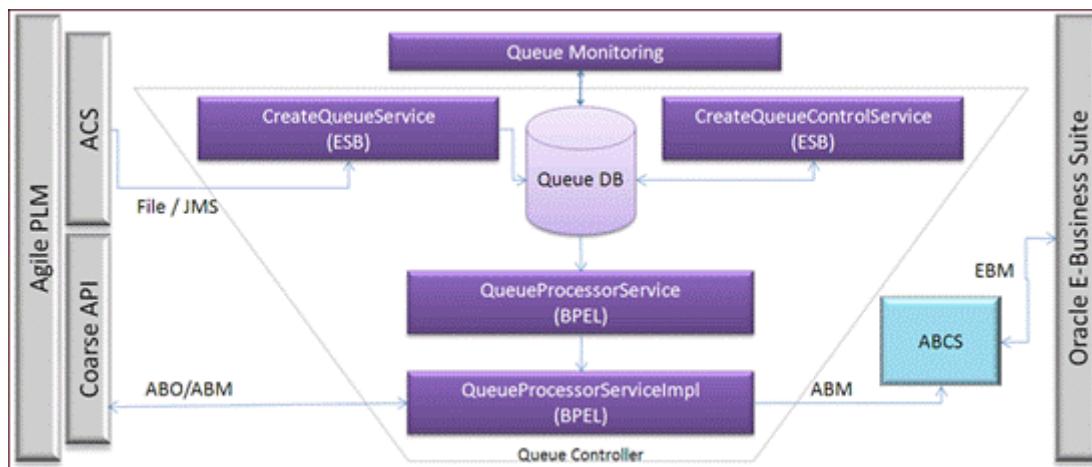

### B.4.1 Queue Schema

To support the Queue Management Solution, a polling strategy similar to PollingControlTableStrategy is used. The following two main tables are used to manage the sequential processing and reordering of the messages:

#### 1. QUEUE\_TABLE

It stores all the queue messages that are being provided by the Event trigger.

#### 2. QUEUE\_CONTROL\_TABLE

It stores the relevant information of the messages from the QUEUE\_TABLE that have not been processed yet.

The Queue Manager ensures that only one message is in the control table that is not yet processed. When the processing of a message is complete, a Pending message from the Queue table is inserted into this table. This facilitates the sequential processing of the message. In addition, because all the pending messages are stored in the Queue table, they can be reordered.

#### Queue DB Details

Table B-11 lists the Queue Schema tables:

**Table B-11 Queue Schema Table**

Table	Description
ECO_QUEUE	This table holds the data of both Process ECO and Validate ECO. The PROCESS_TYPE column is used as an identifier for Process ECO and Validate ECO.
ECO_QUEUE_CONTROL	This table stores the details about the rows that are currently in processing state.
ECO_QUEUE_STATUS	This table holds the data to control the simultaneous processing and suspending the Queue. Changing the values in the ECO_QUEUE_STATUS column can change the number of simultaneously processed ECOs.

Table B-12 lists the structure of the ECO\_QUEUE\_STATUS service:

**Table B-12 Structure of ECO\_QUEUE\_STATUS service**

ECO_QUEUE_STATUS_ID	ECO_QUEUE_STATUS	ECO_QUEUE_STATUS_DESCRIPTION	Description
1	1 or 0	ProcessECO Suspend Resume Status	The status of the queue for ProcessECOs in suspended or resume mode. 0 means suspended.
2	1	Maximum Number of Rows for Processing ProcessECO	The count of rows that can be processed simultaneously for Process ECO  A value of 1 means sequential processing.
3	5	Maximum Number of Rows for Processing ValidateECO	The count of rows that can be processed simultaneously for Validate ECO
4	1 or 0	ValidateECO Suspend Resume Status	The status of the Queue for ValidateECOs, in suspended or resume mode. 0 means suspended

## B.4.2 Queue Controller

A polling strategy on the Queue DB is used for addressing the Queue Management business requirements. The Queue Controller provides an ECO system to ensure that this polling strategy works in tandem to ensure that:

- All event-transmitted file and JMS messages are added to the queue for both change order release and change order processing flows as well as for the change order validation flow.
- At any given time, only one pending message is in the control table for change order release and change order processing flows.

- Once the processing of a message in the control table is complete, insert the highest-priority queue message for change order release and change order processing flows from the queue table to the control table.
- In case of change order release and change order processing flows, if the Integration flow ends due to error, the queue manager will wait until the message is resubmitted or removed for Change Order Release flow.
- Change order release processes are available on the Process ECO tab.
- Validate release processes are available on the Validate ECO tab.
- Validate change order processes are processed concurrently, dissimilar to the change order release and change order processing flows, which are processed sequentially.
- If any of the validate change order processes end due to error, other processes can still proceed.

### B.4.3 Queue Monitor

When a change order is released for release ECO or validate ECO processing by ACS, it is picked up by Queue Controller. The Queue Monitor displays a list of all the change orders that are waiting to be processed in both the tabs. It also helps you reorder their sequence of processing.

**For more information** about Queue Monitor, see *Agile PLM to Oracle E-Business Suite Integration User Guide*, "Managing the Process Queues."

## B.5 Queue Manager Services

These services are deployed as part of Queue Manager:

- CreateQueueService
- CreateQueueControlService
- QueueProcessorService
- QueueProcessorServiceImpl

### B.5.1 CreateQueueService

The CreateQueueService is implemented as a routing mediator service. An adapter service (File/JMS Adapter) polls on the destinations for any event payloads. The payload is in the form of aXML files. This service receives message as a binary element (aXML file). For each payload received the service inserts a new row into the QUEUE table. An Adapter Service (DB Adapter) is used for the same. The Toplink solution generates the required schema from the table for this DB Adapter.

- The service uses transformation services to populate any NOT NULL columns in the table.
- OBJECT\_REFERENCE is inserted with the file name of the aXML file using the mediator header transformation extension functions.
- PROCESS\_STATUS is pending for the newly inserted row.
- PROCESS\_PRIORITY is captured from the file name. (ACS can be configured to append a default order for the file name)

### B.5.2 CreateQueueControlService

The CreateQueueControlService is implemented as a routing mediator service. A DB Adapter polls on the QUEUE\_CONTROL\_TABLE table. If no rows are in the Pending status, CreateQueueControlService invokes a DB Adapter service, which runs a custom SQL. This SQL identifies the highest-priority pending Queue message from QUEUE\_TABLE table and inserts the same in the QUEUE\_CONTROL\_TABLE table.

This polling strategy ensures that at any time only one pending message is in the QUEUE\_CONTROL\_TABLE table. Once the Pending message is processed and status completed, a new Pending message is inserted from the QUEUE\_TABLE table to the QUEUE\_CONTROL\_TABLE table. When the status for a message is completed in the QUEUE\_CONTROL\_TABLE, that row is deleted from the table.

### B.5.3 QueueProcessorService

The QueueProcessorService is implemented as a routing mediator service that acts like an Interface and provides a façade in front of the QueueProcessorServiceImpl service. A DB Adapter polls on the QUEUE\_CONTROL table for any Pending messages. A pending message in the table is routed to the QueueProcessorServiceImpl service, which processes the message. Based on the result from the implementation service, the status of the message is updated in the control table.

### B.5.4 QueueProcessorServiceImpl

The primary task of this service is to invoke the RequestorABCS. The response from RequestorABCS is processed and the queue is updated with the processing status.

**Input:** The QueueMessage generated by the Toplink solution in the QueueProcessorService is used as the input for this Service.

**Output:** QueueStatusMessage, which contains the status and result of the processed queue message.

Figure B-13 illustrates how QueueProcessorServiceImpl invokes the RequestorABCS:

**Figure B-13 Invoking RequestorABCS through QueueProcessorServiceImpl**

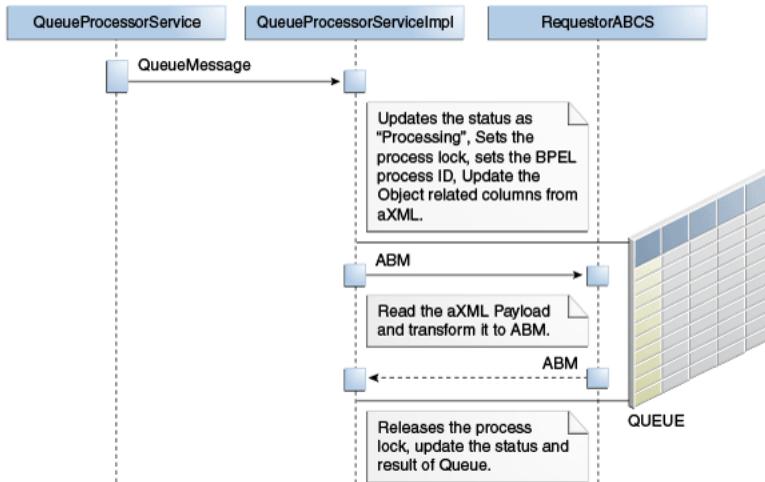


Table B-13 lists the steps required to invoke the RequestorABCS:

**Table B-13 Steps to invoke Requestor ABCS**

Step	Description
QueueProcessorService invokes QueueProcessorServiceImpl process	The QueueProcessorService invokes QueueProcessorServiceImpl with QueueMessage (generated by the Toplink solution for the QUEUE table) as input.
Invoke UpdateQueueStatus DB Adapter service	The input QueueMessage in this process is assigned with the following values to update the Queue message in the Queue DB  PROCESS_STATUS: Processing PROCESS_ID: BPEL Process ID PROCESS_LOCK: 1
Transform AgileData (aXML) to ABM	QueueMessage will have the AgileData payload, which is transformed to ABM.
Invoke RequestorABCS	QueueProcessorServiceImpl invokes RequestorABCS with ABM as input.
Invoke Coarse Grained Web Service	RequestorABCS optionally invokes the coarse-grained Web services to get the ABM populated with any missing information required for the integration flow.
RequestorABCS Transforms ABM to EBM	The response ABM from coarse-grained WS is transformed to EBM and an operation on EBS is invoked with EBM as the input.
RequestorABCS orchestrates the business flow	The RequestorABCS routes the EBM to EBS.
EBS routes the response to RequestorABCS	The response EBM from EBS is routed to the RequestorABCS, which is transformed to ABM and returned to QueueProcessorServiceImpl
QueueProcessorServiceImpl invokes UpdateQueueResult DB Adapter service	The result from the RequestorABCS is used to update the status of Queue in the Queue DB. Also, the Process lock is released.

## B.5.5 Transformations

The aXML payload is transformed to the ABM, which is input for the RequestorABCS. Because the ABM schema is defined on the lines of aXML schema, this transformation will be easier to do in the Jdeveloper XSL Mapper.

## B.5.6 Implementation Details

The QueueProcessorServiceImpl is implemented as an Asynchronous BPEL process. For updating the queue status and invoking RequestorABCS, RequestorABCS and DB Adapters are called. These involve some logic (parsing the aXML payload) that cannot be achieved by means of mediator.

---

**Note:** QueueID is used for the correlation set between QueueProcessorServiceImpl and RequestorABCS.

---

### **B.5.7 Error Management**

All errors in the integration flow are managed in RequestorABCS. Any such errors leading to failure of the queue processing will be handled in this process. Because of such error, the queue status and result with failure status is updated in the Queue DB.

# C

---

## Troubleshooting

This appendix provides information on queue management.

**Issue:** ECOs remain in PROCESSING status in Agile Queue and flow trace displays this error: BINDING.JCA-11811 Stored procedure invocation error. Error while trying to prepare and execute the APPS.INV\_EBI\_CHANGE\_ORDER\_PUB.PROCESS\_CHANGE\_ORDER\_LIST API. Cause: java.sql.SQLTimeoutException: ORA-03111: break received on communication channel

**Solution:**

Increase the JTA timeout values from the FMW console.

To increase JTA timeout:

1. Log in to the FMW admin console.
2. Navigate to soa\_domain > Services > JTA.
3. Set the timeout value.

To increase syncMaxWaitTime:

1. Log in to the FMW EM console.
2. Expand SOA and right-click soa-infra.
3. Select SOA Administration > BPEL Properties.
4. Click the More BPEL Configuration Properties link and find syncMaxWaitTime.
5. Change it to some higher value and save.

**Issue:** In ECO forward flow, after the ECO is processed successfully the transfer status attribute (flex) in the ECO in Agile PLM is not being updated.

**Solution:** Check the flexfield attribute, which has been enabled corresponding to the change. Then, ensure that the same attribute has been configured in the AIAConfigurationProperties.xml for that property.

**Issue:** For the Item Cost update and Item Balance update flows, the attributes in Agile PLM are not getting updated.

**Solution:** Check whether the Multisite\_Enabled property is set to True or False. Based on this given value, ensure that the Cost and Quantity attributes in AIAConfigurationProperties.xml are correctly set.

**Issue:** NPR use case is failing with one of the following errors:

- Exception on JaxRpc invoke: start fault message: SystemError: Error occurred in Web Services system.:end fault message

- Exception on JaxRpc invoke: HTTP transport error:  
javax.xml.soap.SOAPException: java.security.PrivilegedActionException:  
javax.xml.soap.SOAPException: Message send failed: Premature EOF encountered
- The security token could not be authenticated or authorized

**Solution:** Refer preinstallation steps for PIP installation in Installation and Upgrade Guide and verify the SOA Provider setup in Oracle EBS environment using Oracle E-Business Suite Integrated SOA Gateway Troubleshooting Guide.

**Issue:** In Agile PLM ACS, the test for Destination fails with some error.

**Solution:** If the Agile PLM server and the FMW server are in different domains, then for the ACS to work, an entry should be made in the host file of the two servers.

For Example:

10.176.138.126 aia06.agile.agilesoft.com aia06 - this would go in the FMW server's host file. 64.181.168.191 sdc78623svqe.corp.siebel.com - this would go in the Agile PLM server's host file.

**Issue:** If Oracle E-Business Suite Provider ends due to error, with an error message such as "This Child Item has no Master Item record in MTL\_SYSTEM\_ITEMS," perform the step given in the following solution.

**Solution:** If it is the first-time release of the item from Agile PLM to Oracle E-Business Suite, then the item should be sent as an Affected or Revised item in the Master Org along with Child Org from Agile PLM.

## C.1 Queue Issues

**Issue:** ECOs remain in the pending state and are not picked up for processing.

**Solution:** By default, the queue will be in the suspended mode. Click the Resume button to continue the queue processing.

**Issue:** Two ATOs for the same ECO appear in the process ECO tab.


When a change is submitted that triggers the Validate ECO Subscriber and then released (which triggers ECO trigger), and not much interval is given between because the ACS thread is sleeping when the Validate ECO trigger picks up the data, then the change is already in released status. ACS does not pick up the snapshot data when the process is triggered but the data when the ACS thread is running to pick up the data.

**Solution:** Enough delay between the submit and release processes should be maintained so that the ECO status is correct and is queued up under either Validate or Process ECO queue. Otherwise, if some changes need to be auto-implemented, do not configure prerelease audit subscription for that particular workflow.

**Issue:** Once an ECO/MCO/SCO has been released in Agile PLM, the Queue does not display any corresponding entry for the change order.

**Solution:**

1. Check Agile PLM for ATO, which was created on the release of the particular change order. Check the status on the Where Sent tab of the ATO.
2. If a Failure message is displayed, then an error occurred while ACS was processing the publishing of the data to JMS destination. The error message is specified in the Transmission Notes column.

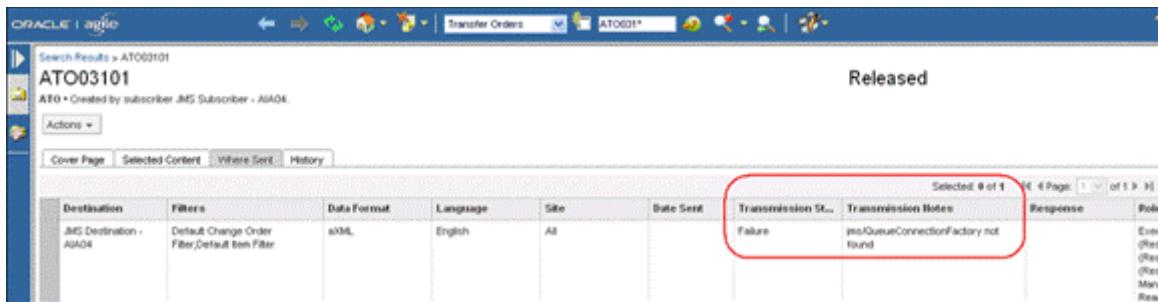**Figure C-1** *Transmission Failure*


The screenshot shows a table of transfer orders. One row is highlighted with a red box, indicating a transmission failure. The table columns include Destination, Filters, Data Format, Language, Site, Date Sent, Transmission Status, Transmission Notes, Response, and Roles. The 'Transmission Status' for the highlighted row is 'Failure', and the 'Transmission Notes' column contains the text 'jmsQueueConnectionFactory not found'.

Destination	Filters	Data Format	Language	Site	Date Sent	Transmission Status	Transmission Notes	Response	Roles
JMS Destination - AIA04	Default Change Order Filter/Default Item Filter	XML	English	All		Failure	jmsQueueConnectionFactory not found		Exeq (Read/Read/Read/Read/Read/Read)

3. After you make any necessary changes to the transfer order or the destination to correct the problem, reset the destination to attempt delivery again. Once a destination has failed, no other transfer orders can be sent to that destination until it has been reset.

To reset the destination:

1. In the Agile PLM Java client, navigate to Admin > System Settings > Agile PLM Content Service > Destinations.
2. Select the particular destination and click the Reset button on the top.
3. After resetting the destination, test the destination to ensure that the test is successful for the destination. If it fails, it has to be resolved, mainly by ensuring that all the ECO Queue settings are correct and the OPMN Port specified in the URL is correct.
4. If the status of the ATO transfer is Success, the implication is that the ACS publishing of data to JMS queue was successful. Then you need to troubleshoot in the BPEL console:
5. Navigate to the Enterprise Manager (EM) Console: <http://host:port/em>.
6. In the EM console, select SOA > soa-infra > Instances.
7. In the Instances tab, check for the instance of the CreateQueueService in which the error occurred.
8. Click the instance name link and navigate to the Flow link.
9. Go to the BPEL instance and see the error.

### C.1.1 Oracle E-Business Suite Issues

**Issue:** The status of the concurrent program request for one of the reverse flows is Error

**Solution:**

1. If the concurrent program request displays an Error status, in the View Requests tab, select the row with the error and click the View Log button.
2. The error message is displayed there. If further details are required on the process instance that caused the error, note the BPEL process instance that appears in the log file.
3. Navigate to the Enterprise Manager (EM) Console: <http://host:port/em>.
4. Select the Instances tab and search for the specific instance ID.

5. Click the instance name and navigate to the Flow link.
6. Go to the BPEL instance and see the error.

**Issue:** Create ECO flow gives the error message "following user does not have the PersonId not attached to it."

**Solution:**

1. Check whether the Oracle E-Business Suite integration user specified in the AIAConfigurationProperties.xml is the correct user.
2. If the user is correct, then check whether the integration user has a person name assigned in System Administrator Responsibility.
3. If the user is not assigned, then assign a valid user.

**Issue:** Unable to establish connection to Oracle EBS Apps adapter.

**Solution:**

If the database password is changed, then the same should be changed in the Connection Pool in the Application server console. Try establishing a connection.

1. Log in to the FMW console: <http://:console>.
2. Navigate to Services > Data Sources.
3. Navigate to the Connection Pool tab for the data source OracleAppsDataSourceDS.
4. Change the password.
5. Save and test the data source.

**Issue:** Concurrent Program Failed

**Solution:**

1. Check whether the profile values for EBS Integration Proxy Server Host, EBS Integration Proxy Server Port are configured correctly in the Profiles screen.
2. If not, then enter the correct value for these.

**For more information** about the correct values of these options, see Setting Up Oracle E-Business Suite, Profile Settings.

# D

## Security Policies Validation

This appendix discusses the security policies available for Agile Product Lifecycle Management Integration Pack for Oracle E-Business Suite Design to Release.

**Table D-1** describes the composites delivered with this integration and their default Service Policies (entry point) and Client Policies (invocation point). It describes the reason why the policy is either globally or locally attached.

To validate the attached policies:

1. Login to Oracle Enterprise Manager Fusion Middleware Control.
2. Navigate to **SOA, default**.
3. Select the composite to verify
  - a. On the **Dashboard** tab, navigate to the **Services and References** section.
  - b. Select the text in the **Name** column (service or reference/client).  
A new page will open.
  - c. Select the **Policies** tab.
  - d. View the directly or globally attached policies.

---

**Note:** The information listed in [Table D-1](#) assumes the latest rollup patch (RUP) for the Design to Release: Agile - EBS / PIM PIP is applied. The latest patch number at the time of the 11.1 release is 12543953, but it is recommended to download the latest RUP from My Oracle Support (MOS).

---

**Table D-1 Security Policies**

Composite	Service	Reference	Security Policy	csf-key	Attached Directly or Globally	Comments
ACSAXMLJMSConsumer	AIASystem.A	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Globally	Follows JMSConsumer naming standards, so it gets this global policy automatically attached.
ACSAXMLJMSConsumer	ACSJMSWeblogicConsumer	N/A	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.
ACSAXMLJMSConsumer	N/A	BPELSystem.default.CreateQueueService.CreateQueueService_1_0	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows JMSConsumer naming standards, so all references get this global policy automatically attached.

**Table D-1 (Cont.) Security Policies**

Composite	Service	Reference	Security Policy	csf-key	Attached Directly or Globally	Comments
BillOfMaterialsCo nfigurationEBS	BillOfMateria lsConfigurati onEBS_ep	N/A	oracle/aia_wss_ saml_or_ username_ token_service_ policy_OPT_ ON	N/A	Globally	Follows EBS naming standards, so it gets this global policy automatically attached.
BillOfMaterialsCo nfigurationEBS	N/A	GetConfiguratio nURLAgileReq ABCImpl	oracle/aia_ wss10_saml_ token_client_ policy_OPT_ ON	N/A	Globally	Follows EBS naming standards, so all references get this global policy automatically attached.
BillOfMaterialsCo nfigurationEBS	N/A	SyncBillOfMate rialsConfigurati onListAgileProv ABCImpl	oracle/aia_ wss10_saml_ token_client_ policy_OPT_ ON	N/A	Globally	Follows EBS naming standards, so all references get this global policy automatically attached.
BillOfMaterialsCo nfigurationEBS	N/A	AsyncResponse Simulator	oracle/aia_ wss10_saml_ token_client_ policy_OPT_ ON	N/A	Globally	Follows EBS naming standards, so all references get this global policy automatically attached.
ChangeStatusDBA dapter	AIASystem.A gile.ABCSIm pl.ChangeStat usDBAdapter _RS_ep	N/A	oracle/aia_wss_ saml_or_ username_ token_service_ policy_OPT_ ON	N/A	Globally	Follows Adapter naming standards, so it gets this global policy automatically attached.
ChangeStatusDBA dapter	N/A	AIASystem.Agi l.e.ABCSImpl.Ch angeStatusDBA dapter	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.
CreateEngineering ChangeOrderListEb bizAdapter	CreateEngin eringChange OrderListEbiz Adapter_ep	N/A	oracle/aia_wss_ saml_or_ username_ token_service_ policy_OPT_ ON	N/A	Globally	Follows Adapter naming standards, so it gets this global policy automatically attached.
CreateEngineering ChangeOrderListEb bizAdapter	N/A	CreateEngineeri ngChangeOrder ListEbizAdapte r	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.
CreateEngineering ChangeOrderListEb bizProvABCImpl	CreateEngin eringChange OrderListEbiz ProvABCImpl	N/A	oracle/aia_wss_ saml_or_ username_ token_service_ policy_OPT_ ON	N/A	Globally	Follows ABCS naming standards, so it gets this global policy automatically attached.
CreateEngineering ChangeOrderListEb bizProvABCImpl	N/A	ECOService	oracle/aia_ wss10_saml_ token_client_ policy_OPT_ ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
CreateEngineering ChangeOrderListEb bizProvABCImpl	N/A	AIASyncError HandlingBPELP rocess	oracle/aia_ wss10_saml_ token_client_ policy_OPT_ ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.

**Table D-1 (Cont.) Security Policies**

Composite	Service	Reference	Security Policy	csf-key	Attached Directly or Globally	Comments
CreateEngineeringChangeOrderListEbizProvABCSImpl	N/A	EngineeringChangeOrderErrorResponseEBS	oracle/wss_username_token_client_policy	AIABasicCredentials	Directly	We attach a local policy in this case to break the transaction. The global transaction will have optimization on, which forces all SOAP calls to be local, so everything would be in the same transaction. We attach a local policy in this case so that we are NOT using a policy with optimize calls turned on so that we break the transaction. This is needed for Async-Delayed Response calls to work properly in an error scenario so the error gets returned to the Requester instead of just rolling back the entire transaction.
CreateEngineeringChangeOrderListEbizProvABCSImpl	N/A	UserExt	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
CreateEngineeringChangeOrderListEbizProvABCSImpl	N/A	EngineeringChangeOrderResponseEBS	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
CreateQueueControlService	PollQueueControl_RS_ep	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Directly	Must attach the same global policy that other ABCS are using. Since this composite does not follow naming standards we must attach this as a local policy.
CreateQueueControlService	PollQueueControl	N/A	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.
CreateQueueControlService	N/A	InsertIntoQueueControl	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.
CreateQueueService	ACS	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Directly	Must attach the same global policy that other ABCS are using. Since this composite does not follow naming standards we must attach this as a local policy.
CreateQueueService	N/A	InsertIntoQueue	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.
EngineeringChangeOrderEBS	EngineeringChangeOrderEBS_ep	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Globally	Follows EBS naming standards, so it gets this global policy automatically attached.
EngineeringChangeOrderEBS	N/A	UpdateEngineeringChangeOrderListAgileProvABCSImpl	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows EBS naming standards, so all references get this global policy automatically attached.

**Table D-1 (Cont.) Security Policies**

Composite	Service	Reference	Security Policy	csf-key	Attached Directly or Globally	Comments
EngineeringChangeOrderEBS	N/A	ValidateEngineeringChangeOrderListEbizProvABCSImpl	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows EBS naming standards, so all references get this global policy automatically attached.
EngineeringChangeOrderEBS	N/A	CreateEngineeringChangeOrderListEbizProvABCImpl	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows EBS naming standards, so all references get this global policy automatically attached.
EngineeringChangeOrderEBS	N/A	AsyncResponse Simulator	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows EBS naming standards, so all references get this global policy automatically attached.
EngineeringChangeOrderResponseEBS	EngineeringChangeOrderResponseEBS	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Globally	Follows EBS naming standards, so it gets this global policy automatically attached.
EngineeringChangeOrderResponseEBS	N/A	AsyncResponse Simulator	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows EBS naming standards, so all references get this global policy automatically attached.
EngineeringChangeOrderResponseEBS	N/A	ProcessEngineeringChangeOrderAgileReqABCImpl	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows EBS naming standards, so all references get this global policy automatically attached.
EngineeringChangeOrderResponseEBS	N/A	ValidateEngineeringChangeOrderListAgileReqABCImpl	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows EBS naming standards, so all references get this global policy automatically attached.
EngineeringChangeOrderResponseEBS	N/A	UpdateEngineeringChangeOrderListEbizReqABCImpl	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows EBS naming standards, so all references get this global policy automatically attached.
GenerateItemNumberService	client	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Directly	Must attach the same global policy that other ABCS are using. Since this composite does not follow naming standards we must attach this as a local policy.
GenerateItemNumberService	N/A	GenerateItemNumberService	oracle/wss_username_token_client_policy	GINServiceKey	Directly	The Ebiz web service needs the wss_http_token_client_policy policy attached using the GINServiceKey when their service is called. This passes the Ebiz credentials to their web services. Without this directly attached policy, the global policy would be used and it would try to pass the AIA FMW credentials, which are not correct to get a user into Ebiz.

**Table D-1 (Cont.) Security Policies**

Composite	Service	Reference	Security Policy	csf-key	Attached Directly or Globally	Comments
GetConfiguratorU RLAgileReqABCSI mpl	client	N/A	oracle/aia_wss_ saml_or_ username_ token_service_ policy_OPT_ ON	N/A	Globally	Follows ABCS naming standards, so it gets this global policy automatically attached.
GetConfiguratorU RLAgileReqABCSI mpl	N/A	BillOfMaterials ConfigurationE BSV1	oracle/aia_ wss10_saml_ token_client_ policy_OPT_ ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
GetConfiguratorU RLAgileReqABCSI mpl	N/A	ExtensionServices	oracle/aia_ wss10_saml_ token_client_ policy_OPT_ ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
GetConfiguratorU RLAgileReqABCSI mpl	N/A	AIASyncError HandlingBPELProc ess	oracle/aia_ wss10_saml_ token_client_ policy_OPT_ ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
GetConfiguratorU RLEbizAdapter	GetConfigura torURLEbizA dapter_ep	N/A	oracle/aia_wss_ saml_or_ username_ token_service_ policy_OPT_ ON	N/A	Globally	Follows Adapter naming standards, so it gets this global policy automatically attached.
GetConfiguratorU RLEbizAdapter	N/A	GetConfigurato rURLEbizAdapt er	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.
GetConfiguratorU RLEbizProvABCSI mpl	GetConfigura torURLEbizPr ovABCSIImpl	N/A	oracle/aia_wss_ saml_or_ username_ token_service_ policy_OPT_ ON	N/A	Globally	Follows ABCS naming standards, so it gets this global policy automatically attached.
GetConfiguratorU RLEbizProvABCSI mpl	N/A	GetConfigurato rURLEbizAdapt er	oracle/aia_ wss10_saml_ token_client_ policy_OPT_ ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
GetConfiguratorU RLEbizProvABCSI mpl	N/A	AIASyncError HandlingBPELProc ess	oracle/aia_ wss10_saml_ token_client_ policy_OPT_ ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
GetConfiguratorU RLEbizProvABCSI mpl	N/A	GetConfigurato rURLEbizProvA BCSImplExtensi on	oracle/aia_ wss10_saml_ token_client_ policy_OPT_ ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
ItemBalanceEBS	ItemBalanceE BS_ep	N/A	oracle/aia_wss_ saml_or_ username_ token_service_ policy_OPT_ ON	N/A	Globally	Follows EBS naming standards, so it gets this global policy automatically attached.

**Table D-1 (Cont.) Security Policies**

Composite	Service	Reference	Security Policy	csf-key	Attached Directly or Globally	Comments
ItemBalanceEBS	N/A	AsyncResponse Simulator	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows EBS naming standards, so all references get this global policy automatically attached.
ItemBalanceEBS	N/A	UpdateItemBalanceAgileProvABCImpl	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows EBS naming standards, so all references get this global policy automatically attached.
ItemBalanceResponseEBS	ItemBalanceResponseEBS_ep	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Globally	Follows EBS naming standards, so it gets this global policy automatically attached.
ItemBalanceResponseEBS	N/A	AsyncResponse Simulator	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows EBS naming standards, so all references get this global policy automatically attached.
ItemBalanceResponseEBS	N/A	UpdateItemBalanceEbizReqABCImpl	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows EBS naming standards, so all references get this global policy automatically attached.
ItemEBSV2	ItemEBSV2_ep	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Globally	Follows EBS naming standards, so it gets this global policy automatically attached.
ItemEBSV2	N/A	SyncItemListEbizProvABCImpl	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows EBS naming standards, so all references get this global policy automatically attached.
ItemEBSV2	N/A	AsyncResponse Simulator	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows EBS naming standards, so all references get this global policy automatically attached.
ItemEBSV2	N/A	UpdateItemListAgileProvABCImpl	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows EBS naming standards, so all references get this global policy automatically attached.
ItemResponseEBS_V2	ItemResponseEBSV2_ep	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Globally	Follows EBS naming standards, so it gets this global policy automatically attached.
ItemResponseEBS_V2	N/A	UpdateItemListEbizReqABCImpl	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows EBS naming standards, so all references get this global policy automatically attached.

**Table D-1 (Cont.) Security Policies**

Composite	Service	Reference	Security Policy	csf-key	Attached Directly or Globally	Comments
ItemResponseEBS V2	N/A	AsyncResponse Simulator	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows EBS naming standards, so all references get this global policy automatically attached.
ItemResponseEBS V2	N/A	SyncItemListAgileReqABCImpl	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows EBS naming standards, so all references get this global policy automatically attached.
ProcessEngineer ingChangeOrderAgi leReqABCImpl	QueueControl ler	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so it gets this global policy automatically attached.
ProcessEngineer ingChangeOrderAgi leReqABCImpl	N/A	ProcessEngineer ingChangeOrde rAgileReqABCServiceImplExtensionService	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
ProcessEngineer ingChangeOrderAgi leReqABCImpl	N/A	ChangeABSServ ice	oracle/wss_http_token_client_policy	AgileWe bService Key	Directly	Agile web services need the wss_http_token_client_policy policy attached using the AgileWebServiceKey when their service is called. This passes the Agile credentials to their web services. Without this directly attached policy, the global policy would be used and it would try to pass the AIA FMW credentials, which are not correct to get a user into Agile.
ProcessEngineer ingChangeOrderAgi leReqABCImpl	N/A	AIAAsyncError HandlingBPELProcess	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
ProcessEngineer ingChangeOrderAgi leReqABCImpl	N/A	QueueProcessor ServiceImplErrorReturn	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
ProcessEngineer ingChangeOrderAgi leReqABCImpl	N/A	EngineeringChangeOrderEBS	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
QueryEngineering ChangeOrderListE bizAdapter	QueryEngine eringChange OrderListEbiz Adapter_ep	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Globally	Follows Adapter naming standards, so it gets this global policy automatically attached.
QueryEngineering ChangeOrderListE bizAdapter	N/A	QueryEngineeri ngChangeOrder ListEbizAdapte r	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.

**Table D-1 (Cont.) Security Policies**

Composite	Service	Reference	Security Policy	csf-key	Attached Directly or Globally	Comments
QueryItemBalanceListEbizAdapter	QueryItemBalanceListEbizAdapter_ep	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Globally	Follows Adapter naming standards, so it gets this global policy automatically attached.
QueryItemBalanceListEbizAdapter	N/A	QueryItemBalanceListEbizAdapter	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.
QueryItemListEbizAdapter	QueryItemListEbizAdapter_ep	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Globally	Follows Adapter naming standards, so it gets this global policy automatically attached.
QueryItemListEbizAdapter	N/A	QueryItemListEbizAdapter	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.
QueryResponsibilityEbizAdapter	QueryResponsibilityEbizAdapter_ep	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Globally	Follows Adapter naming standards, so it gets this global policy automatically attached.
QueryResponsibilityEbizAdapter	N/A	QueryResponsibilityEbizAdapter	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.
QueueProcessorService	PollQueueControlForPendingMsg_RS_ep	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Directly	Must attach the same global policy that other ABCS are using. Since this composite does not follow naming standards we must attach this as a local policy.
QueueProcessorService	PollQueueControlForPendingMsg	N/A	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.
QueueProcessorService	N/A	BPELSystem.default.QueueProcessorServiceImpl	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Directly	Must attach the same global policy that other ABCS are using. Since this composite does not follow naming standards we must attach this as a local policy.
QueueProcessorService	client	client	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Directly	Must attach the same global policy that other ABCS are using. Since this composite does not follow naming standards we must attach this as a local policy.
QueueProcessorService	ServiceImpl	ProcessEngineeringChangeOrderAgileReqABCSImpl	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Directly	Must attach the same global policy that other ABCS are using. Since this composite does not follow naming standards we must attach this as a local policy.
QueueProcessorService	ServiceImpl	UpdateQueueMsgStatus	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.
QueueProcessorService	ServiceImpl	UpdateOnlyQueueMsgResult	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.
QueueProcessorService	ServiceImpl	SelectECOQueueControl	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.

**Table D-1 (Cont.) Security Policies**

Composite	Service	Reference	Security Policy	csf-key	Attached Directly or Globally	Comments
QueueProcessorServiceImpl	N/A	UpdateQueueMsgResult	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.
QueueProcessorServiceImpl_V2	client	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Directly	Must attach the same global policy that other ABCS are using. Since this composite does not following naming standards we must attach this as a local policy.
QueueProcessorServiceImpl_V2	N/A	ProcessEngineeringChangeOrderAgileReqABCSImpl	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Directly	Must attach the same global policy that other ABCS are using. Since this composite does not following naming standards we must attach this as a local policy.
QueueProcessorServiceImpl_V2	N/A	UpdateQueueMsgStatus	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.
QueueProcessorServiceImpl_V2	N/A	UpdateOnlyQueueMsgResult	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.
QueueProcessorServiceImpl_V2	N/A	SelectECOQueueControl	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.
QueueProcessorServiceImpl_V2	N/A	UpdateQueueMsgResult	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.
QueueProcessorServiceImpl_V2	N/A	ValidateEngineeringChangeOrderListAgileReqABCSImpl	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Directly	Must attach the same global policy that other ABCS are using. Since this composite does not following naming standards we must attach this as a local policy.
SyncBillOfMaterialsConfigEbizJMSConsumer	SyncBillOfMaterialsConfigEbizJMSConsumer	N/A	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.
SyncBillOfMaterialsConfigEbizJMSConsumer	N/A	SyncBillOfMaterialsConfigurationsOnListEbizReqABCImpl.SyncBillOfMaterialsConfigurationsOnListEbizReqABCImpl_1_0	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows JMSConsumer naming standards, so all references get this global policy automatically attached.
SyncBillOfMaterialsConfigEbizJMSProducer	SyncBillOfMaterialsConfigEbizJMSProducer_ep	N/A	oracle/no_authentication_service_policy	N/A	Directly	The Ebiz Configurator servlet does not use security, so we attach the no_authentication_service_policy so that it doesn't try to invoke the Ebiz servlet with the incorrect security.
SyncBillOfMaterialsConfigEbizJMSProducer	N/A	SyncBillOfMaterialsConfigurationsOnEbizJMSProducer	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.
SyncBillOfMaterialsConfigListAgileProvABCSImpl	client	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.

**Table D-1 (Cont.) Security Policies**

Composite	Service	Reference	Security Policy	csf-key	Attached Directly or Globally	Comments
SyncBillOfMateria lsConfigurationLis tAgileProvABCSt mpl	N/A	ExtensionServic es	oracle/aia_wss10_saml_token_client_policy_OPT_ ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
SyncBillOfMateria lsConfigurationLis tAgileProvABCSt mpl	N/A	AIAAsyncError HandlingBPELP rocess	oracle/aia_wss10_saml_token_client_policy_OPT_ ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
SyncBillOfMateria lsConfigurationLis tAgileProvABCSt mpl	N/A	ConfiguratorTer minationService	oracle/wss_http_token_client_policy	AgileWe bService Key	Directly	Agile web services need the wss_http_token_client_policy policy attached using the AgileWebServiceKey when their service is called. This passes the Agile credentials to their web services. Without this directly attached policy, the global policy would be used and it would try to pass the AIA FMW credentials, which are not correct to get a user into Agile.
SyncBillOfMateria lsConfigurationLis tEbizReqABCSt pl	SyncBillOfMa terialsConfig urationListEb izReqABCSt mpl	N/A	oracle/aia_wss_saml_or_username_token_service_ policy_OPT_ ON	N/A	Globally	Follows ABCS naming standards, so it gets this global policy automatically attached.
SyncBillOfMateria lsConfigurationLis tEbizReqABCSt pl	N/A	SyncBillOfMate rialsConfigurati onListEbizReqABCSExtension	oracle/aia_wss10_saml_token_client_policy_OPT_ ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
SyncBillOfMateria lsConfigurationLis tEbizReqABCSt pl	N/A	BillOfMaterials ConfigurationE BSV1	oracle/aia_wss10_saml_token_client_policy_OPT_ ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
SyncItemListAgile ReqABCSt	client	N/A	oracle/aia_wss_saml_or_username_token_service_ policy_OPT_ ON	N/A	Globally	Follows ABCS naming standards, so it gets this global policy automatically attached.
SyncItemListAgile ReqABCSt	N/A	SyncItemListAg ileReqABCStImp l	oracle/aia_wss10_saml_token_client_policy_OPT_ ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
SyncItemListAgile ReqABCStImpl	SyncItemList AgileReqABC S	N/A	oracle/aia_wss_saml_or_username_token_service_ policy_OPT_ ON	N/A	Globally	Follows ABCS naming standards, so it gets this global policy automatically attached.
SyncItemListAgile ReqABCStImpl	N/A	AIAAsyncError HandlingBPELP rocess	oracle/aia_wss10_saml_token_client_policy_OPT_ ON	N/A	Globally	Follows ABCS naming standards, so it gets this global policy automatically attached.

**Table D-1 (Cont.) Security Policies**

Composite	Service	Reference	Security Policy	csf-key	Attached Directly or Globally	Comments
SyncItemListAgileReqABCImpl	N/A	SyncItemListAgileReqABCImplExtensionService	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so it gets this global policy automatically attached.
SyncItemListAgileReqABCImpl	N/A	ItemEBSV2	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so it gets this global policy automatically attached.
SyncItemListEbizAdapter	SyncItemListEbizAdapter_ep	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Globally	Follows Adapter naming standards, so it gets this global policy automatically attached.
SyncItemListEbizAdapter	N/A	SyncItemListEbizAdapter	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.
SyncItemListEbizProvABCImpl	SyncItemListEbizProvABCImpl	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so it gets this global policy automatically attached.
SyncItemListEbizProvABCImpl	N/A	SyncItemListEbizAdapter	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so it gets this global policy automatically attached.
SyncItemListEbizProvABCImpl	N/A	SyncItemListEbizProvABCImplExtension	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so it gets this global policy automatically attached.
SyncItemListEbizProvABCImpl	N/A	TransformAppContextEbizService	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so it gets this global policy automatically attached.
SyncItemListEbizProvABCImpl	N/A	GINServiceExtension	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so it gets this global policy automatically attached.
SyncItemListEbizProvABCImpl	N/A	AIASyncErrorHandlerBPELProcess	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so it gets this global policy automatically attached.
SyncItemListEbizProvABCImpl	N/A	ItemResponseEBSV2	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so it gets this global policy automatically attached.

**Table D-1 (Cont.) Security Policies**

Composite	Service	Reference	Security Policy	csf-key	Attached Directly or Globally	Comments
SyncItemListEbizProvABCSImpl	N/A	ItemResponseErrorEBS	oracle/wss_username_token_client_policy	AIABasicCredentials	Directly	We attach a local policy in this case to break the transaction. The global transaction will have optimization on, which forces all SOAP calls to be local, so everything would be in the same transaction. We attach a local policy in this case so that we are NOT using a policy with optimize calls turned on so that we break the transaction. This is needed for Async-Delayed Response calls to work properly in an error scenario so the error gets returned to the Requester instead of just rolling back the entire transaction.
TransformAppContextEbizService	TransformAppContextEbizService	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Directly	Must attach the same global policy that other ABCS are using. Since this composite does not follow naming standards we must attach this as a local policy.
TransformAppContextEbizService	N/A	AIAAsyncErrorHandlingBPELProcess	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Directly	Must attach the same global policy that the AIAAsyncErrorHandlingBPELProcess is using. Since this composite does not follow naming standards we must attach this as a local policy.
TransformAppContextEbizService	N/A	QueryRespEbizAdapter	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Directly	Must attach the same global policy that the QueryResponsibilityEbizAdapter is using. Since this composite does not follow naming standards we must attach this as a local policy.
UpdateEngineeringChangeOrderListAgileProvABCSImpl	UpdateEngineeringChangeOrderListAgileProvABCSImpl	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so it gets this global policy automatically attached.
UpdateEngineeringChangeOrderListAgileProvABCSImpl	N/A	EngineeringChangeOrderEBS	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.

**Table D-1 (Cont.) Security Policies**

Composite	Service	Reference	Security Policy	csf-key	Attached Directly or Globally	Comments
UpdateEngineerin gChangeOrderList AgileProvABCSIm pl	N/A	MergeABSServi ce	oracle/wss_ http_token_ client_policy	AgileWe bService Key	Directly	Agile web services need the wss_http_token_client_policy policy attached using the AgileWebServiceKey when their service is called. This passes the Agile credentials to their web services. Without this directly attached policy, the global policy would be used and it would try to pass the AIA FMW credentials, which are not correct to get a user into Agile.
UpdateEngineerin gChangeOrderList AgileProvABCSIm pl	N/A	EngineeringCha ngeOrderErrorR esponseEBS	oracle/wss_ username_ token_client_ policy	AIABasi cCredent ials	Directly	We attach a local policy in this case to break the transaction. The global transaction will have optimization on, which forces all SOAP calls to be local, so everything would be in the same transaction. We attach a local policy in this case so that we are NOT using a policy with optimize calls turned on so that we break the transaction. This is needed for Async-Delayed Response calls to work properly in an error scenario so the error gets returned to the Requester instead of just rolling back the entire transaction.
UpdateEngineerin gChangeOrderList AgileProvABCSIm pl	N/A	ChangeStatusSe rvice	oracle/wss_ http_token_ client_policy	AgileWe bService Key	Directly	Agile web services need the wss_http_token_client_policy policy attached using the AgileWebServiceKey when their service is called. This passes the Agile credentials to their web services. Without this directly attached policy, the global policy would be used and it would try to pass the AIA FMW credentials, which are not correct to get a user into Agile.
UpdateEngineerin gChangeOrderList AgileProvABCSIm pl	N/A	UpdateEngineer ingChangeOrde rListAgileProv ABCSImplExten sion	oracle/aia_ wss10_saml_ token_client_ policy_OPT_ ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.

**Table D-1 (Cont.) Security Policies**

Composite	Service	Reference	Security Policy	csf-key	Attached Directly or Globally	Comments
UpdateEngineerin gChangeOrderList AgileProvABCSSim pl	N/A	ChangeABSServ ice	oracle/wss_ http_token_ client_policy	AgileWe bService Key	Directly	Agile web services need the wss_http_token_client_policy policy attached using the AgileWebServiceKey when their service is called. This passes the Agile credentials to their web services. Without this directly attached policy, the global policy would be used and it would try to pass the AIA FMW credentials, which are not correct to get a user into Agile.
UpdateEngineerin gChangeOrderList AgileProvABCSSim pl	N/A	AIAAsyncError HandlingBPELP rocess	oracle/aia_ wss10_saml_ token_client_ policy_OPT_- ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
UpdateEngineerin gChangeOrderList AgileProvABCSSim pl	N/A	ChangeStatusD BAdapter	oracle/aia_ wss10_saml_ token_client_ policy_OPT_- ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
UpdateEngineerin gChangeOrderList EbizReqABCSSim pl	UpdateECOE bizReqABCSSI mpl-ECOEB S	N/A	oracle/aia_wss_ saml_or_ username_ token_service_ policy_OPT_- ON	N/A	Globally	Follows ABCS naming standards, so it gets this global policy automatically attached.
UpdateEngineerin gChangeOrderList EbizReqABCSSim pl	N/A	UserExt	oracle/aia_ wss10_saml_ token_client_ policy_OPT_- ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
UpdateEngineerin gChangeOrderList EbizReqABCSSim pl	N/A	EngineeringCha ngeOrderEBS	oracle/aia_ wss10_saml_ token_client_ policy_OPT_- ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
UpdateEngineerin gChangeOrderList EbizReqABCSSim pl	N/A	AIAAsyncError HandlingBPELP rocess	oracle/aia_ wss10_saml_ token_client_ policy_OPT_- ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
UpdateEngineerin gChangeOrderList EbizReqABCSSim pl	N/A	getUpdateEngin eeringChangeO rderListService	oracle/aia_ wss10_saml_ token_client_ policy_OPT_- ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
UpdateEngineerin gChangeOrderStat usEbizEventCons umer	Eco_ Cancellation_ Event	N/A	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.
UpdateEngineerin gChangeOrderStat usEbizEventCons umer	Eco_ Implementati on_Event	N/A	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.

**Table D-1 (Cont.) Security Policies**

Composite	Service	Reference	Security Policy	csf-key	Attached Directly or Globally	Comments
UpdateEngineerin gChangeOrderStat usEbizEventCons umer	Eco_Schedule_Event	N/A	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.
UpdateEngineerin gChangeOrderStat usEbizEventCons umer	Eco_Change_Status	N/A	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.
UpdateEngineerin gChangeOrderStat usEbizEventCons umer	Eco_ReSchedule_Event	N/A	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.
UpdateEngineerin gChangeOrderStat usEbizEventCons umer	N/A	UpdateEngineerin gChangeOrde rListEbizReqAB CSImpl_1_0	oracle/no_authentication_client_policy	N/A	Directly	This is a direct subscription to an Ebiz event which does not require credentials, so a no_authentication_client_policy is attached.
UpdateItemBalanc eListAgileProvAB CSImpl	client	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so it gets this global policy automatically attached.
UpdateItemBalanc eListAgileProvAB CSImpl	N/A	AIAAsyncErrorHandlingBPELProcess	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
UpdateItemBalanc eListAgileProvAB CSImpl	N/A	ItemABSService	oracle/wss_http_token_client_policy	AgileWebServiceKey	Directly	Agile web services need the wss_http_token_client_policy policy attached using the AgileWebServiceKey when their service is called. This passes the Agile credentials to their web services. Without this directly attached policy, the global policy would be used and it would try to pass the AIA FMW credentials, which are not correct to get a user into Agile.
UpdateItemBalanc eListAgileProvAB CSImpl	N/A	UpdateItemBalanceListAgileAB CSImplExtensio n	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
UpdateItemBalanc eListAgileProvAB CSImpl	N/A	ItemBalanceEBS	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.

**Table D-1 (Cont.) Security Policies**

Composite	Service	Reference	Security Policy	csf-key	Attached Directly or Globally	Comments
UpdateItemBalanceImpl	N/A	ItemBalanceError	oracle/wss_username_token_client_policy	AIABasicCredentials	Directly	We attach a local policy in this case to break the transaction. The global transaction will have optimization on, which forces all SOAP calls to be local, so everything would be in the same transaction. We attach a local policy in this case so that we are NOT using a policy with optimize calls turned on so that we break the transaction. This is needed for Async-Delayed Response calls to work properly in an error scenario so the error gets returned to the Requester instead of just rolling back the entire transaction.
UpdateItemBalanceImpl	client	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so it gets this global policy automatically attached.
UpdateItemBalanceImpl	N/A	ItemBalanceService	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
UpdateItemBalanceImpl	N/A	AIAAsyncErrorHandlerBPELProcess	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
UpdateItemBalanceImpl	N/A	ItemBalanceEBS	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
UpdateItemBalanceImpl	N/A	UserExit	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
UpdateItemListAgileProvABCImpl	UpdateItemListAgileProvABC	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so it gets this global policy automatically attached.
UpdateItemListAgileProvABCImpl	N/A	AIAAsyncErrorHandlerBPELProcess	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
UpdateItemListAgileProvABCImpl	N/A	ItemEBSV2	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.

**Table D-1 (Cont.) Security Policies**

Composite	Service	Reference	Security Policy	csf-key	Attached Directly or Globally	Comments
UpdateItemListAgileProvABCSImpl	N/A	ItemABSService	oracle/wss_http_token_client_policy	AgileWebServiceKey	Directly	Agile web services need the wss_http_token_client_policy policy attached using the AgileWebServiceKey when their service is called. This passes the Agile credentials to their web services. Without this directly attached policy, the global policy would be used and it would try to pass the AIA FMW credentials, which are not correct to get a user into Agile.
UpdateItemListAgileProvABCSImpl	N/A	UpdateItemListAgileProvABCSImplExtension	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
UpdateItemListAgileProvABCSImpl	N/A	ItemErrorResponseEBSV2	oracle/wss_username_token_client_policy	AIABasicCredentials	Directly	We attach a local policy in this case to break the transaction. The global transaction will have optimization on, which forces all SOAP calls to be local, so everything would be in the same transaction. We attach a local policy in this case so that we are NOT using a policy with optimize calls turned on so that we break the transaction. This is needed for Async-Delayed Response calls to work properly in an error scenario so the error gets returned to the Requester instead of just rolling back the entire transaction.
UpdateItemListEbizReqABCSImpl	UpdateItemListEbizReqABCSImpl - ItemEBS	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so it gets this global policy automatically attached.
UpdateItemListEbizReqABCSImpl	N/A	AIAAyncErrorHandlerBPELProcess	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
UpdateItemListEbizReqABCSImpl	N/A	UserExt	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
UpdateItemListEbizReqABCSImpl	N/A	ItemEBS	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.

**Table D-1 (Cont.) Security Policies**

Composite	Service	Reference	Security Policy	csf-key	Attached Directly or Globally	Comments
UpdateItemListEbizReqABCSImpl	N/A	getItemAttrList Service	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
ValidateEngineeringChangeOrderListAgileReqABCSImpl	client	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so it gets this global policy automatically attached.
ValidateEngineeringChangeOrderListAgileReqABCSImpl	N/A	EngineeringChangeOrderEBS	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
ValidateEngineeringChangeOrderListAgileReqABCSImpl	N/A	ChangeABSService	oracle/wss_http_token_client_policy	AgileWebService Key	Directly	Agile web services need the wss_http_token_client_policy policy attached using the AgileWebServiceKey when their service is called. This passes the Agile credentials to their web services. Without this directly attached policy, the global policy would be used and it would try to pass the AIA FMW credentials, which are not correct to get a user into Agile.
ValidateEngineeringChangeOrderListAgileReqABCSImpl	N/A	AIAAsyncErrorHandlerBPELProcess	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
ValidateEngineeringChangeOrderListAgileReqABCSImpl	N/A	AIAErrorHandlerAdministrationProcess	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
ValidateEngineeringChangeOrderListAgileReqABCSImpl	N/A	QueueProcessorServiceImplErrorHandlerReturn	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
ValidateEngineeringChangeOrderListAgileReqABCSImpl	N/A	ValidateEngineeringChangeOrderListAgileReqABCSImplExtensionService	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
ValidateEngineeringChangeOrderListEbizAdapter	ValidateEngineeringChangeOrderListEbizAdapter_ep	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Globally	Follows Adapter naming standards, so it gets this global policy automatically attached.
ValidateEngineeringChangeOrderListEbizProvABCSImpl	N/A	ValidateEngineeringChangeOrderListEbizAdapter	N/A	N/A	N/A	Policies cannot be attached to JCA Adapters.

**Table D-1 (Cont.) Security Policies**

Composite	Service	Reference	Security Policy	csf-key	Attached Directly or Globally	Comments
ValidateEngineeringChangeOrderListEbizProvABCSImpl	ValidateEngineeringChangeOrderListEbizProvABCSImpl	N/A	oracle/aia_wss_saml_or_username_token_service_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so it gets this global policy automatically attached.
ValidateEngineeringChangeOrderListEbizProvABCSImpl	N/A	EngineeringChangeOrderErrorResponseEBS	oracle/wss_username_token_client_policy	AIABasicCredentials	Directly	We attach a local policy in this case to break the transaction. The global transaction will have optimization on, which forces all SOAP calls to be local, so everything would be in the same transaction. We attach a local policy in this case so that we are NOT using a policy with optimize calls turned on so that we break the transaction. This is needed for Async-Delayed Response calls to work properly in an error scenario so the error gets returned to the Requester instead of just rolling back the entire transaction.
ValidateEngineeringChangeOrderListEbizProvABCSImpl	N/A	AIASyncErrorHandlerBPELProcess	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
ValidateEngineeringChangeOrderListEbizProvABCSImpl	N/A	EngineeringChangeOrderResponseEBS	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
ValidateEngineeringChangeOrderListEbizProvABCSImpl	N/A	UserExt	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.
ValidateEngineeringChangeOrderListEbizProvABCSImpl	N/A	ValidateECOService	oracle/aia_wss10_saml_token_client_policy_OPT_ON	N/A	Globally	Follows ABCS naming standards, so all references get this global policy automatically attached.

