

**Oracle® Banking Platform**

Installation Guide - Silent Installation

Release 2.3.0.0.0

**E56276-01**

July 2014

Copyright © 2011, 2014, Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate failsafe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

This software or hardware and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

---

---

# Contents

<b>Preface</b> .....	xi
Audience.....	xi
Documentation Accessibility .....	xi
Organization of the Guide .....	xi
Related Documents .....	xiii
Conventions .....	xiii
<b>1 Getting Started</b>	
1.1 About Oracle Banking Platform .....	1-1
1.2 About This Guide.....	1-1
1.3 Assumptions.....	1-2
1.4 Exclusions.....	1-2
<b>2 Pre-Installation Configuration</b>	
2.1 Setup Prerequisites .....	2-1
2.1.1 Hardware Environment.....	2-1
2.1.2 Software Environment .....	2-2
2.1.2.1 Certification Details.....	2-2
2.1.2.2 Optional .....	2-3
2.2 Installation Process Overview.....	2-4
2.3 Installation Checklists .....	2-6
2.3.1 Updating installobp***.properties .....	2-6
2.3.2 Database and WebLogic Domain Configuration .....	2-16
2.4 OID Schema Setup – Custom OBP Schema .....	2-18
2.4.1 Prerequisite – OID setup.....	2-18
2.4.2 Verify the OID installation .....	2-18
2.4.2.1 Start and Verify the OID processes.....	2-19
2.4.2.2 OID Performance Tuning .....	2-20
2.4.2.3 Import OBP Specific LDIF files.....	2-22
2.4.2.4 Verify the import using ODSM or JXplorer.....	2-23
<b>3 Oracle Banking Platform Host Media Pack Installation</b>	
3.1 Installation and Configuration Procedure .....	3-1
3.1.1 Preparatory Steps.....	3-1
3.1.2 Pre-Installation Steps.....	3-1

3.1.3	Installation Steps.....	3-2
3.1.4	Front End Processing Interface (FEPI) Installation Steps .....	3-7
3.2	Post Installation Configuration.....	3-8
<b>4</b>	<b>Oracle Banking Platform Presentation Media Pack Installation</b>	
4.1	Installation and Configuration Procedure .....	4-1
4.1.1	Preparatory Steps.....	4-1
4.1.2	Pre-Installation Steps.....	4-1
4.1.3	Installation Steps.....	4-2
4.2	Post Installation Configuration.....	4-6
<b>5</b>	<b>Oracle Banking Platform SOA Media Pack Installation</b>	
5.1	Installation and Configuration Procedure .....	5-1
5.1.1	Preparatory Steps.....	5-1
5.1.2	Pre-Installation Steps.....	5-1
5.1.3	Installation Steps.....	5-2
5.2	Post Installation Configuration.....	5-6
<b>6</b>	<b>Oracle Banking Platform Reference Process Models Media Pack Installation</b>	
6.1	Pre-Installation Steps.....	6-1
6.2	Installing RPM Process Maps.....	6-1
6.2.1	Restoration of the database (.adb file) on Oracle BPA .....	6-1
6.2.2	Restoration of HTML Files .....	6-5
<b>7</b>	<b>Standalone Database Setup – Running Repository Creation Utility (RCU)</b>	
7.1	Pre-Installation Steps.....	7-1
7.2	Oracle Banking Platform Database Setup – RCU Installation.....	7-1
7.3	Completion of Host DB Schema Creation Verification .....	7-5
7.4	HOST DB Schema Seeding .....	7-5
7.5	System Configuration DB Update Script Execution .....	7-6
<b>8</b>	<b>Oracle Banking Platform and IPM Integration</b>	
8.1	IPM Application Creation.....	8-1
8.1.1	Manage Connections.....	8-1
8.1.1.1	UCM Connection.....	8-1
8.1.1.2	Workflow Connection.....	8-1
8.1.2	Manage Applications .....	8-2
8.2	Manage Inputs.....	8-3
<b>9</b>	<b>BIP Datasource Creation</b>	
9.1	BIP Datasource Creation .....	9-1
<b>10</b>	<b>Monitoring Servers Using Oracle Enterprise Manager</b>	
10.1	Add EM Agents.....	10-1



10.2	Deploy OBP EM Plugin.....	10-5
10.3	Create Services and Aggregate Service .....	10-9
10.3.1	Verify SOA keys for Service Creation of SOA Process .....	10-9
10.3.2	Execute Scripts .....	10-11
10.3.3	Configure Systems Manually .....	10-12
<b>11</b>	<b>Post Installation Verification</b>	
11.1	UI Domain Verification .....	11-1
11.2	Host Domain Verification.....	11-5
11.3	SOA Domain Verification .....	11-6
<b>12</b>	<b>Errors and Remedies</b>	
12.1	Oracle Banking Platform Domain Installation .....	12-1
12.2	Oracle Banking Platform Security Policy Seeding .....	12-1
12.3	Oracle Banking Platform Domain Post Installation.....	12-1
12.4	Error on First Log in .....	12-2
12.5	Log in Issues .....	12-3
12.6	SOA Setup in Cluster.....	12-3
12.6.1	"COMPONENTTYPE": invalid identifier error.....	12-3
12.7	XText .....	12-3
<b>13</b>	<b>Uninstalling the Application</b>	
13.1	Manual Uninstall.....	13-1



## List of Figures

2-1	Installation Overview .....	2-5
2-2	Locate the OID Instance .....	2-19
2-3	Start the OID Instance .....	2-19
2-4	Verify the Status of OID Instance .....	2-19
2-5	JXplorer.....	2-24
3-1	Steps in installobphost.sh script .....	3-3
3-2	Verification of Properties .....	3-4
3-3	Confirmation and Copying of Installables to Target Machine.....	3-5
3-4	Domain Installation Confirmation .....	3-6
3-5	OID Domain Creation and Seeding .....	3-7
3-6	Host Domain Admin Server Credentials .....	3-9
3-7	Host Domain Post Installation Script Execution .....	3-10
3-8	Host Domain Post Installation Script Execution Summary .....	3-11
4-1	Steps in installobpui.sh script .....	4-3
4-2	Confirmation to Proceed Domain Installation.....	4-4
4-3	Copying and Extraction of obpinstall-ui.zip.....	4-5
4-4	Domain Creation Confirmation .....	4-6
4-5	UI Admin Server Credentials.....	4-7
4-6	UI Admin Server Running.....	4-8
4-7	UI Post Install Script Confirm .....	4-9
4-8	UI Post Install Script Running.....	4-10
5-1	Steps in installobpsoa.sh script .....	5-3
5-2	Confirmation to Proceed Domain Installation.....	5-4
5-3	Copying and Extraction of obpinstall-soa.zip .....	5-5
5-4	Domain Creation Confirmation .....	5-6
5-5	SOA Post Installation Confirmation.....	5-8
5-6	SOA Post Installation Completion.....	5-9
6-1	Select Server for RPM Process Database .....	6-2
6-2	Enter Database Administrator Password .....	6-2
6-3	Select Database File to Restore.....	6-3
6-4	Configuration Administrator Password.....	6-4
6-5	Select AMC File to Import .....	6-5
7-1	Host DB Schema Setup Confirmation.....	7-2
7-2	Enter Database Credentials .....	7-3
7-3	Creation of Host DB Schema .....	7-4
7-4	Completion of Host DB Schema Creation .....	7-5
8-1	IPM Application Field Definitions .....	8-2
8-2	IPM Application Workflow Configuration.....	8-2
8-3	IPM Bulk Upload Input Location .....	8-4
9-1	BIP Server Console Login .....	9-2
9-2	BIP Administration .....	9-3
9-3	BIP JDBC Connection .....	9-4
9-4	BIP - Add Data Source.....	9-5
9-5	BIP Data Source Created .....	9-6
10-1	Add Middlewares .....	10-2
10-2	Add Oracle Fusion Middleware or WebLogic Domain .....	10-2
10-3	Enter Server Details .....	10-3
10-4	Identify Targets .....	10-3
10-5	Monitoring Templates.....	10-4
10-6	Select Import .....	10-5
10-7	Import Template .....	10-5
10-8	Undeploy Plugin .....	10-7
10-9	Undeploy Plugin - Select Management Agents.....	10-7
10-10	Undeploy Plugin - Click Add .....	10-8

10-11	Undeploy Plugin - Select Agent.....	10-8
10-12	Select the SOA Middleware.....	10-10
10-13	Composites for the SOA Middleware.....	10-10
10-14	Add Composite Names.....	10-11
10-15	Created Services .....	10-12
10-16	Manual Configuration - Select Service.....	10-13
10-17	Manual Configuration - Navigate to System Configuration.....	10-13
10-18	Manual Configuration - Inclusion or Exclusion .....	10-14
11-1	UI WebLogic Console.....	11-2
11-2	UI EM Console Status Check.....	11-3
11-3	UI Admin wsm-pm Validator.....	11-4
11-4	UI Managed wsm-pm Validator.....	11-5
11-5	Host WebLogic Console.....	11-6
11-6	SOA WebLogic Console.....	11-7
12-1	Error on First Log In .....	12-2



## List of Tables

2-1	Hardware and OS .....	2-1
2-2	Mandatory Software .....	2-2
2-3	Notes .....	2-2
2-4	Values for updating installobp***.properties.....	2-6
2-5	Oracle Banking Platform DB and WebLogic Domain Configuration .....	2-16
2-6	Parameter Values to be Changed .....	2-20
2-7	Order of Execution.....	2-22
9-1	Data Source Details.....	9-5

---

---

# Preface

The Oracle Banking Platform Installation Guide - Silent Installation contains information on silent installation and configuration of Oracle Banking Platform software and its associated products.

This preface contains the following topics:

- [Audience](#)
- [Documentation Accessibility](#)
- [Organization of the Guide](#)
- [Related Documents](#)
- [Conventions](#)

## Audience

This guide is primarily meant as a step-by-step installation manual for Oracle Banking Platform IT deployment teams at Oracle Banking Platform development center as well as onshore implementations at client locations to install a complete Oracle Banking Platform system in a UNIX based environment.

The reader is expected to have an acquaintance with UNIX platform, Oracle WebLogic server and Oracle Fusion platform firmware such as Oracle JDeveloper, Oracle OID and Oracle SOA Suite.

## Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

### Access to Oracle Support

Oracle customers have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

## Organization of the Guide

This document contains:

## **Chapter 1, "Getting Started"**

This chapter presents an overview of Oracle Banking Platform and the installation guide. It also mentions the assumptions, limitations and exclusions that this document has been based upon.

## **Chapter 2, "Pre-Installation Configuration"**

This chapter describes the pre-configuration activities that are to be completed successfully for proper installation and functioning of Oracle Banking Platform.

## **Chapter 3, "Oracle Banking Platform Host Media Pack Installation"**

This chapter details every step involved in the installation, and post installation and configuration of Oracle Banking Platform Host Media pack.

## **Chapter 4, "Oracle Banking Platform Presentation Media Pack Installation"**

This chapter details every step involved in the installation, and post installation and configuration of Oracle Banking Platform Presentation (UI) Media pack.

## **Chapter 5, "Oracle Banking Platform SOA Media Pack Installation"**

This chapter details every step involved in the installation, and post installation and configuration of Oracle Banking Platform SOA (Integration Server) Media pack.

## **Chapter 6, "Oracle Banking Platform Reference Process Models Media Pack Installation"**

This chapter details the steps involved in the installation of Oracle Banking Platform Reference Process Models Media pack (Media pack 4).

## **Chapter 7, "Standalone Database Setup – Running Repository Creation Utility (RCU)"**

This chapter details the steps involved in Oracle Banking Platform Database which are primarily concerned with importing an existing database dump of the QA database.

## **Chapter 8, "Oracle Banking Platform and IPM Integration"**

This chapter details the steps involved in the integration of Oracle Banking Platform and Oracle Imaging and Process Management (IPM).

## **Chapter 9, "BIP Datasource Creation"**

This chapter explains the steps required for Oracle Banking Platform BIP (BI Publisher) datasource creation.

## **Chapter 10, "Monitoring Servers Using Oracle Enterprise Manager"**

This chapter lists the steps required to monitor servers using Oracle Enterprise Manager (EM).

## **Chapter 11, "Post Installation Verification"**

This chapter lists the steps required to verify the Oracle Banking Platform solution installation.

## **Chapter 12, "Errors and Remedies"**

This chapter provides information on troubleshooting to help diagnose and remedy some of the problems encountered during installation of the Oracle Banking Platform.



## Chapter 13, "Uninstalling the Application"

This chapter explains the process of uninstalling the Oracle Banking Platform.

### Related Documents

For more information, see the following documentation:

- For information necessary for the installation and configuration of integration components to create a complete solution using Oracle Banking Platform (OBP) and Oracle Documaker, see the installation and configuration guides at [http://docs.oracle.com/cd/E22582\\_01/e22582\\_01\\_index.html](http://docs.oracle.com/cd/E22582_01/e22582_01_index.html).
- Information on Oracle Fusion Middleware Install-Config Checklist is available at <http://aseng-wiki.us.oracle.com/asengwiki/display/ASMWArchPM/FMW+Install-Config+Checklist+Page>.
- For a comprehensive overview of security for Oracle Banking, see the Oracle Banking Security Guide
- For the complete list of Oracle Banking licensed products and the Third Party licenses included with the license, see the Oracle Banking Licensing Guide
- For information related to setting up a bank or a branch, and other operational and administrative functions, see the Oracle Banking Administrator's Guide
- For information related to customization and extension of Oracle Banking, see the Oracle Banking Extensibility Guide
- For information on the functionality and features of the Oracle Banking product licenses, see the respective Oracle Banking Functional Overview documents

### Conventions

The following text conventions are used in this document:

Convention	Meaning
<b>boldface</b>	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
monospace	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

The following acronyms are used in this document:

Acronym	Meaning
OBP	Oracle Banking Platform
UI	User Interface that is Presentation Tier
HOST	Middleware Host Tier
SOA	Service Oriented Architecture Tier
DB or db	Oracle Database
OEL	Oracle Enterprise Linux
SVN	Source Code Version Repository

---

<b>Acronym</b>	<b>Meaning</b>
RCU	Repository Creation Utility
WLS	WebLogic Server
sh	Unix Shell file
OID	Oracle Internet Directory
ORMB	Oracle Revenue Management and Billing

---

---

---

# Getting Started

This chapter presents an overview of Oracle Banking Platform and the installation guide. It also mentions the assumptions, limitations and exclusions that this document has been based upon.

## 1.1 About Oracle Banking Platform

Oracle Banking Platform (OBP) is a one-stop solution for a bank for its core banking operations, across retail offerings. It is designed to help banks respond strategically to today's business challenges, while also transforming their business models and processes to reduce operating costs and improve productivity across both front and back offices.

OBP provides a unified yet scalable IT solution for a bank to manage its data and end-to-end business operations with an enriched user experience. It is a composed set of different modules wherein each of the modules is serviced by a set of services and other subsystems.

## 1.2 About This Guide

This document guides you through the installation of the core banking application Oracle Banking Platform. This document guides in deploying the following parts of the application:

- Presentation Server (ADF Presentation UI deployment on WebLogic)
- Application Server (Banking Services hosted on WebLogic)
- Integration Server (Oracle Banking Platform Integration and Approval Processes hosted on Oracle SOA)
- Security Configuration (Seeding security to OID)
- Seed Data Configuration (Seeding data to Core banking OLTP Database Server)

There are multiple prerequisites that need to be done before the start of the installation. The prerequisites section lists down the requirements. This document does not attempt to guide you through the prerequisites installation. The readers are expected to see the appropriate platform documentation to install the prerequisites.

This document prescribes bare minimum hardware requirements to have a functional application configuration. The sizing for a production environment is not prescribed here.

Due care has been taken to make this document as complete as possible. In case of any anomalies please mail to [obp-deployment-support@oracle.com](mailto:obp-deployment-support@oracle.com).

There are certain steps in the installation that *may* not be optimal yet. Further releases will optimize the deployment further.

## 1.3 Assumptions

It is assumed that the reader is aware of the technologies involved and is capable of installing the prerequisite software products mentioned in [Section 2.1.2, "Software Environment"](#).

The following are the assumptions regarding the environment and setup with regard to carrying out this installation:

- The Oracle Banking Platform installables are downloaded and copied onto a Linux machine or Linux VM.
- The reader has taken a remote connection to the Linux machine via Windows box.
- The reader is able to take an 'ssh' connection to the servers on which various Oracle Banking Platform components have to be installed from the Linux machine.
- The user is aware of the process of creating required db schema using RCU prior to initiation of OBP installation.

## 1.4 Exclusions

Though some of the software and products listed in prerequisites section may work on Windows, such qualification has not been carried out and shall not be the focus of this guide. It is advisable to use the mentioned Operating System (OS) for the best experience.

## Pre-Installation Configuration

This chapter describes the pre-configuration activities that are to be completed successfully for proper installation and functioning of Oracle Banking Platform.

### 2.1 Setup Prerequisites

This section lists down the requirements from an environment perspective including minimum hardware requirements with Operating System (OS) and the middleware software products, which the Oracle Banking Platform solution depends and runs on (for example, Database or WebLogic) or interfaces with (for example, OID or IPM).

#### 2.1.1 Hardware Environment

The minimum hardware requirements for Oracle Banking Platform solution to install and function decently are listed below:

**Table 2–1 Hardware and OS**

Sr. No.	CPU (2+GHz)	RAM (GB)	Disk (GB)	OS Version	Purpose
1	4	12	100	OEL 5.7 OEL 6.3+	Oracle Banking Platform Oracle Database
2	4	10	40	OEL 5.7 OEL 6.3+	Oracle Banking Platform ADF UI Presentation Server
3	4	10	40	OEL 5.7 OEL 6.3+	Oracle Banking Platform Services Middleware Host Server
4	2	8	40	As per OID certification matrix.	Oracle OID Server
5	2	8	40	As per OID certification matrix.	Oracle IPM Server
6	2	10	40	As per OID certification matrix.	Oracle BIP Server
7	4	16	60	As per OID certification matrix.	Oracle SOA Server

## 2.1.2 Software Environment

It is assumed that the following products are installed and are available on the server on which the Oracle Banking Platform installation will be performed.

### 2.1.2.1 Certification Details

The following software are mandatory:

**Table 2–2 Mandatory Software**

Software	Version
Oracle JDeveloper	11.1.1.7.0
Oracle ADF	11.1.1.7.0
Oracle Imaging and Process Management / Webcenter Content	11.1.1.7.0
Oracle WebLogic Server	10.3.6.0
Oracle SOA Suite	11.1.1.7.0
Oracle WebServices Manager	11.1.1.7.0
Oracle Data Integrator	11.1.1.7.0
Oracle Business Intelligence Publisher	11.1.1.7.0
Oracle Enterprise Manager	12c
Oracle Repository Creation Utility	11.1.1.7.0 or 11.1.1.6.0 (As applicable)
Oracle Universal Installer	11.1.1.5.0
Oracle OPSS Client	11.1.1.7.0
Oracle Entitlement Server	11.1.2.2.0
Oracle Adaptive Access Manager	11.1.2.2.0
Oracle Internet Directory	11.1.1.7.0
Oracle Identity Manager	11.1.2.2.0
Oracle Access Manager	11.1.2.2.0
Oracle Revenue Management & Billing	2.2.5.1
Oracle Jrocket JDK	jrocket-jdk1.6.0_51
Database	11.2.0.3.3

**Table 2–3 Notes**

Serial Number	Description
1	OBP release has been certified with OEL version 5.7 and 6.3 during the release cycle. We do not see any issues with running the product on OEL version 5.6.  However, it is strongly recommended to use the versions on which the release is certified.
2	Oracle Business Intelligence Publisher is required at the time of OBP installation. It is required to use the actual BIP property values during the install. This is required as the installer uploads the OBP reports as onto the BIP server as part of the middleware host installation process.

**Table 2–3 (Cont.) Notes**

Serial Number	Description
3	<p>ODI_OUTBOUND_USERNAME and ODI_OUTBOUND_PASSWORD</p> <p>The OBP installer will not abort the installation if this component is not present. It can be installed later.</p> <p>However, it is strongly recommended to use the actual property values instead of default property values during the installation.</p> <p>Else, the actual values for ODI_OUTBOUND_USERNAME and ODI_OUTBOUND_PASSWORD once available have to be manually updated in the 'ra/FCRJConnectorODI' jndi property of com.ofss.fc.app.connector.ear application inside middleware host server after the entire installation completes.</p>
4	<p>The OBP installer will not abort the installation if this component is not present. It can be installed later.</p> <p>It is strongly recommended to use the actual property values instead of default property values during the installation. Else, these properties have to be manually updated in Host Database after the entire installation completes.</p>
5	<p>OIM_OUTBOUND_USERNAME and OIM_OUTBOUND_PASSWORD</p> <p>The OBP installer will not abort the installation if this component is not present. It can be installed later.</p> <p>It is recommended to use the actual property values instead of default property values during the install. Else, these properties have to be manually updated in Host Database. Also, actual values for OIM_OUTBOUND_USERNAME and OIM_OUTBOUND_PASSWORD once available have to be manually updated in the 'ra/FCRJConnectorOIM' jndi property of com.ofss.fc.app.connector.ear application inside middleware host server after the entire installation completes.</p>
6	Oracle Access Manager can be installed later.
7	<p>The patch needs to be downloaded from support.oracle.com and applied on the WebLogic 10.3.6 installation. Details are as under:</p> <p>Bug id 16485257</p> <p>NAMESPACE PREFIX ISSUE FOR JAXWS WEBSERVICE HOSTED ON WEBLOGIC 10.3.6.0</p> <p>A bug concerning the same was logged with Oracle WebLogic team. The bug has been fixed and a patch was released for the same under patch number 16485257.</p>
8	<p>During installation, password of unix user will be asked multiple times for "scp" "ssh". There is a time limit for entering password. If not entered within specified limit, the installation is likely to exit. User should take care of this.</p>

For machine nodes on which Oracle Banking Platform SOA Media pack installation is planned to be carried out a Linux Operating System, there is a parameter that controls maximum number of files which can be opened simultaneously by a process. This parameter needs to be checked for prior installation. For more information, see the documentation on Resolving Message Failure Caused by Too Many Open Files at [http://docs.oracle.com/cd/E21764\\_01/integration.1111/e10226/appx\\_trouble.htm#BABCCJJE](http://docs.oracle.com/cd/E21764_01/integration.1111/e10226/appx_trouble.htm#BABCCJJE)

SOA managed servers may need the default value raised at operating system level to run as it needs to load a large number of Oracle Banking Platform application binaries.

### 2.1.2.2 Optional

The following software is optional:


- Oracle VM server release 2.2.3

## 2.2 Installation Process Overview

The following diagram provides an overview of the steps that need to be taken to install and configure Oracle Banking Platform:



Figure 2-1 Installation Overview

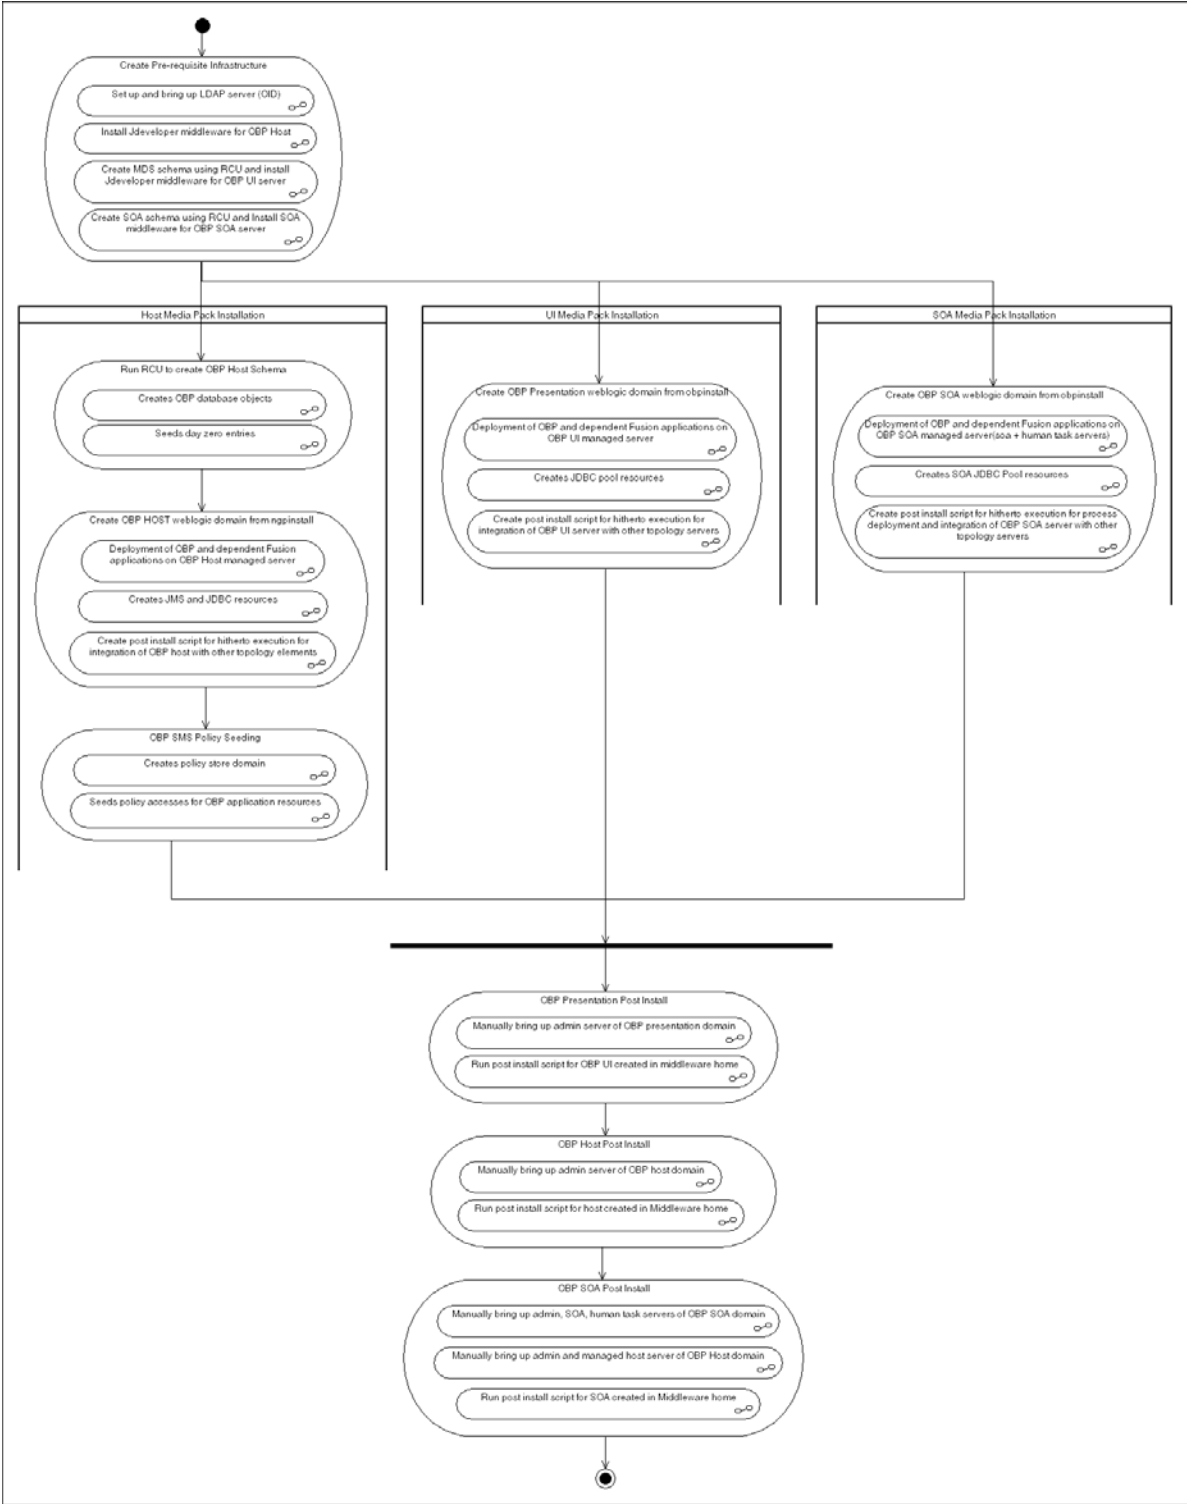

## 2.3 Installation Checklists

This section details a checklist of information which should be filled and kept handy to make the installation experience quick and easy. The checklist has been made more intuitive and relevant by ensuring that the 'key' for properties defined in the installation property file is same as the 'Name' column in the first table of the checklist.

### 2.3.1 Updating `installobp***.properties`

This checklist provides values for updating `installobp***.properties`.

**Table 2–4 Values for updating `installobp***.properties`**

Sr. No	Name	Description	Example Value	Value
1	JPS_CONTEXT_DSN	The DSN used for object class jpsroot in the OID LDAP.	jpsroot	
2	OID_IP	IP address of the OID server.	10.180.25.164	
3	OID_PORT	Port of the OID process instance.	3060	
4	OID_ADMIN_USER	Admin user id which can be used to log in as the OID administrator.	cn=orcladmin	
5	OID_ADMIN_PWD	Refers to the password of admin user of the OID.	welcome1	
6	OID_DOMAIN_NAME	Refers to the domain name to be used for the WebLogic domain for seeding OBP policies. This name will be used to re-associate the Presentation and Host WebLogic installation domain.	obpdomain	
7	OID_DOMAIN_PORT	Refers to the port number to be used for the WebLogic domain for seeding OBP policies. This port should be free on the UI Presentation server.	7005	
8	OID_GROUP_DSN	The DSN used for object class Groups in the OID LDAP.	cn=Groups,dc=oracle,dc=com	
9	OID_USER_DSN	The DSN used for object class Users in the OID LDAP.	cn=Users,dc=oracle,dc=com	
10	POLICY_SEEDING_TYPE	LDAP or DB. Refers to the type of policy seeding required for installation and reassociation with OID.	LDAP	
11	NODE_MGR_PORT	Refers to the port number to be used for the WebLogic node manager. This port should either be free on the UI Presentation server or an existing WebLogic node manager should be installed to listen on this port when the same is started.	5556	

**Table 2–4 (Cont.) Values for updating installobp\*\*\*.properties**

Sr. No	Name	Description	Example Value	Value
12	OUI_JAVA_HOME	Refers to the home directory of java installation. The version of java installed should be 1.7.0. This is used for OBP patching.	/oracle/app/product/jdk-1.7.0.9.x86_64	
13	CENTRAL_INVENTORY_LOC	Refers to the path of central inventory. This path is used for OUI patching.	/scratch/app/orainventory	
14	UI_IP	IP address of the server on which the OBP presentation or UI layer should be installed.	10.180.25.166(Always use IP, don't use localhost)	
15	UI_MW_HOME	Refers to the middleware home of the WebLogic installation on the UI server.	/oracle/app/product/fmw	
16	UI_TARGET	Refers to a location on the UI server where the installables can be transferred. The user id used for installation of OBP should have read, write and execute privileges on this directory.	/home/oracle/software	
17	UI_JAVA_HOME	Refers to the home directory of java installation. The version of java installed should be 1.6.0 or above. This is used to execute the OBP security policies seeding utility at the end of the installation.	/oracle/app/product/jdk1.6.0_29	
18	HOST_IP	IP address of the server on which the OBP host or middleware layer should be installed.	10.180.25.165(Always use IP, don't use localhost)	
19	HOST_MW_HOME	Refers to the middleware home of the WebLogic installation on the Host server.	/oracle/app/product/fmw	
20	HOST_TARGET	Refers to a location on the Host server where the installables can be transferred. The user id used for installation of OBP should have read, write and execute privileges on this directory.	/home/oracle/software	
21	INSTALL_AS	Linux login user id used to install the OBP solution.	oracle	
22	LOCAL_IP	IP of the local machine which could be a Windows machine on which software like XManager is installed for rendering UI of a utility executing on a remote Linux server.	10.180.91.50	
23	BIP_SERVER_IP	IP of the BIP server to host OBP reports	10.180.9.73	
24	BIP_SERVER_PORT	Port of the BIP server that hosts OBP reports	9704	
25	IPM_SERVER_IP	IP of Oracle Image and Processing Server for OBP Content Management	10.180.9.97	

**Table 2–4 (Cont.) Values for updating *installobp\*\*\*.properties***

Sr. No	Name	Description	Example Value	Value
26	IPM_SERVER_PORT	Port of Oracle Image and Processing Server for OBP Content Management	16000	
27	OAAM_SERVER_IP	OAAM server IP for 2FA. OAAM_SERVER_IP refers to the IP address of OAAM Server (that is, the IP of default server name as oaam_server_server1)	ofsmud6vm1106.i-flex.com	
28	OAAM_SERVER_PORT	OAAM server Port for 2FA. OAAM_SERVER_PORT refers to the port of OAAM Server (default server name as oaam_server_server1)	14300	
29	OIM_SERVER_IP	Oracle Identity Manager IP	10.180.91.223	
30	OIM_SERVER_PORT	Oracle Identity Manager Port	9001	
31	OFSAA_SERVER_IP	OFSAA Server IP	10.184.134.19	
32	OFSAA_SERVER_PORT	OFSAA Server Port	9538	
33	OBP_HOST_DB_USER	OBP Host database user	st_appuser	
34	OBP_HOST_DB_IP	OBP Host database IP	10.180.90.30	
35	OBP_HOST_DB_PORT	OBP Host database port	1521	
36	OBP_HOST_DB_SERVICE_NAME	OBP Host database service name	OBPDB	
37	OBP_IPM_MAIN_APP_NAME	OBP Content Main Application Name	ST_MAIN	
38	OBP_IPM_TEMP_APP_NAME	OBP Content Temp Application Name	ST_TEMP	
39	HOST_ADMIN_JVM_PARAMS	Host domain admin JVM startup parameters	(Jrockit) -Xms512m -Xmx1024m -Xgc:gencon -XXnosystemgc	
40	HOST_MANAGED_JVM_PARAMS	Host domain managed JVM startup parameters	-Xms2048m -Xmx2048m -Xgc:gencon -XXnosystemgc -Xns:1024m	
41	UI_ADMIN_JVM_PARAMS	UI domain admin JVM startup parameters	-Xms512m -Xmx1024m -Xgc:gencon -XXnosystemgc	

**Table 2-4 (Cont.) Values for updating installobp\*\*\*.properties**

Sr. No	Name	Description	Example Value	Value
42	UI_MANAGED_JVM_PARAMS	UI domain managed JVM startup parameters	-Xms2048m -Xmx2048m -Xgc:gencon -XXnosystemgc -Xns:1024m	
43	SOA_ADMIN_JVM_PARAMS	SOA domain admin JVM startup parameters	-Xms512m -Xmx1024m -Xgc:gencon -XXnosystemgc	
44	SOA_MANAGED_JVM_PARAMS	SOA domain managed SOA server's JVM startup parameters	-Xms2048m -Xmx2048m -Xgc:gencon -XXnosystemgc -Xns:1024m	
45	SOA_HUMANTASKSERVER_JVM_PARAMS	SOA domain human task server's JVM startup parameters	-Xms2048m -Xmx2048m -Xgc:gencon -XXnosystemgc -Xns:1024m	
46	OBP_IPM_UCM_CONN_NAME	UCM Connection Name	UCM_Connection	
47	OBP_IPM_UCM_CONN_PORT	UCM Connection port	4444	
48	HOST_JAVA_HOME	Refers to the home directory of java installation of the host machine. The version of java installed should be 1.6.0 or above. This is used to execute the OBP security policies seeding utility at the end of the installation.	/opt/jrockit	
49	SOA_JAVA_HOME	Refers to the home directory of java installation of the SOA machine. The version of java installed should be 1.6.0 or above. This is used to execute the OBP security policies seeding utility at the end of the installation.		
50	UI_UNIX_USER	Linux login user id used to install the OBP UI solution.	oracle	
51	UI_DOMAIN_NAME	Refers to the domain name to be used for the WebLogic domain of the OBP Presentation server	obpuidomain	
52	BIP_UNIX_USER	Linux login user id for BIP server	oracle	
53	BIP_HOME	Oracle BIP Home directory on BIP server	/oracle/app/product/fmw1/Oracle_BI1	
54	BIP_INSTANCE_PATH	Oracle BIP Instance directory on BIP server	/oracle/app/product/fmw1/instances/instance1	
55	BIP_SERVER_USER	Oracle BIP server user id	WebLogic	

**Table 2–4 (Cont.) Values for updating installobp\*\*\*.properties**

Sr. No	Name	Description	Example Value	Value
56	BIP_REPORT_BASE_PATH	Logical Base Path on Oracle BIP server under which OBP reports would be hosted	/OBP/REPORTS	
57	BIP_DATASOURCE_NAME	OBP Host database user used by OBP report to fetch data for reports	OBP_HOSTDBUSER	
58	LOCAL_DISPLAY_VALUE	Value of DISPLAY variable to be exported to generate installation wizard in local machine	0.0	
59	OPSS_SEED_TYPE	Type of OID seeding. It should be either PolicyStore or BulkLoad	PolicyStore	
60	DOMAIN_NAME	WebLogic Domain name	Obptestdomain	
61	DOMAIN_DIRECTORY_LOCATION	Location where DOMAIN_NAME folder will be created	/oracle/app/product/fmw/user_projects/domains	
62	WEBLOGIC_USERNAME	Username for WebLogic domain	WebLogic	
63	WEBLOGIC_PASSWORD	Password for WebLogic domain	WebLogic1	
64	MDS_SCHEMA_USER (For UI) MDS_HOST_DB_USER (For HOST)	MDS schema user to be used by UI and Host domain	DEV_MDS	
65	MDS_SCHEMA_PASSWORD (For UI), MDS_HOST_DB_PASSWORD (For HOST)	MDS schema Password of MDS schema user to be used by UI and Host domain	Welcome1	
66	MDS_DB_IP (FOR UI) MDS_HOST_DB_IP (For HOST)	MDS DB IP address of MDS schema user to be used by UI and Host domain	10.180.25.200	
67	MDS_DB_PORT (FOR UI) MDS_HOST_DB_PORT (For HOST)	MDS DB port of MDS schema user to be used by UI and Host domain	1521	

**Table 2-4 (Cont.) Values for updating *installobp\*\*\*.properties***

Sr. No	Name	Description	Example Value	Value
68	MDS_DB_SERVICE_NAME (FOR UI) MDS_HOST_DB_SERVICE_NAME (For HOST)	MDS DB service name of MDS schema user to be used by UI and Host domain	OBPDB	
69	ADMIN_SERVER_LISTEN_ADDRESS	Admin server listen address	10.180.25.23 (Always use IP, don't use localhost)	
70	ADMIN_SERVER_LISTEN_PORT	Admin server listen port	7001	
71	ADMIN_SERVER_SSL_LISTEN_PORT	Admin server SSL listen port	7002	
72	MANAGED_SERVER_LISTEN_ADDRESS	Managed server listen address	10.180.25.23 (Always use IP, don't use localhost)	
73	MANAGED_SERVER_LISTEN_PORT	Managed server listen port	8001	
74	MANAGED_SERVER_SSL_LISTEN_PORT	SSL listen port for managed server	8002	
75	LDAP_PROVIDER	OID or OVD	OID	
76	HOST_MANAGED_SERVER_LISTEN_ADDRESS	Listen address of host managed server	10.180.25.15 (Always use IP, don't use localhost)	
77	HOST_MANAGED_SERVER_LISTEN_PORT	Listen port of host managed server	8001	
78	SOA_MANAGED_SERVER_LISTEN_ADDRESS	Listen address of SOA server	10.180.25.113 (Always use IP, don't use localhost)	

**Table 2–4 (Cont.) Values for updating installobp\*\*\*.properties**

Sr. No	Name	Description	Example Value	Value
79	SOA_ MANAGED_ SERVER_ LISTEN_ PORT	Listen port of SOA server	8001	
80	MDS_ SCHEMA_ USER (For SOA)	MDS schema user for SOA domain	DEV2_MDS	
81	BAM_ SCHEMA_ USER (For SOA)	BAM schema user for SOA domain	DEV2_ORABAM	
82	SOA_ INFRASTRU CTURE_ SCHEMA_ USER (For SOA)	SOA infrastructure schema user for SOA domain	DEV2_SOAINFRA	
83	USER_ MESSAGING _SERVICE_ SCHEMA_ USER (For SOA)	User messaging schema user for SOA domain	DEV2_ORASDPM	
84	SOA_ SERVER_ LISTEN_ ADDRESS	Listen address of SOA server	10.180.25.113 (Always use IP, don't use localhost)	
85	SOA_ SERVER_ LISTEN_ PORT	Listen port of SOA server	8001	
86	SOA_ SERVER_ SSL_LISTEN_ PORT	SSL listen port of SOA server	8002	
87	HUMANTAS K_SERVER_ LISTEN_ ADDRESS	Listen address of human task server	10.180.25.113 (Always use IP, don't use localhost)	
88	HUMANTAS K_SERVER_ LISTEN_ PORT	Listen port of human task server	9001	
89	HUMANTAS K_SERVER_ SSL_LISTEN_ PORT	SSL listen port of human task server	9002	
90	KEYSTORE_ PASSWORD	Password for generating certificate	Welcome1	



**Table 2–4 (Cont.) Values for updating installobp\*\*\*.properties**

Sr. No	Name	Description	Example Value	Value
91	UI_SSL_PASSWORD	Password for configuring SSL in UI domain	Welcome1	
92	UCM_READ_FROM_URL	Flag for getting UCM URL from properties file.  These values are used by the Webcenter Portal application for internet banking. Hence values for UCM_READ_FROM_URL and UCM_IP, UCM_PORT below can be left as is for installations, which do not use the Webcenter portal for hosting their internet banking application.  However, as a best practice, it is recommended that we configure values for UCP_IP and UCM_PORT correctly from day 1.	true/false	
93	UCM_IP	IP of UCM  UCM_IP the IP address of the UCM WebLogic managed server.	Ofss.ucm.com	
94	UCM_PORT	Port of UCM.  UCM_PORT refers to the IntradocServerPort property from \$DomainHome/ucm/cs/config/config.cfg  By default, this value is 4444.	4444	
95	***_OUTBOUND_USERNAME	Username created in connector	WebLogic	
96	***_OUTBOUND_PASSWORD	Password for the user in connector	WebLogic1	
97	OES_IP	IP of the OES machine	10.180.25.116	
98	OES_DOMAIN_NAME	Domain created in OES by using the Authorization Policy Manager.	obpdomain	
99	OES_UNIX_USER	Unix user of the OES Machine	oracle	
100	OES_MW_HOME	Middleware home in OES machine	/scratch/app/product/fmw_oes	
101	OES_JAVA_HOME	JAVA_HOME of OES machine	/oracle/app/product/oracle_jrockit_jdk1.6.0_31_R28.2.3	
102	OES_DB_IP	IP of the OES DB machine	10.180.25.200	
103	OES_DB_PORT	Port of OES DB	1521	
104	OES_SCHEMA_USER	Username of OES DB schema	DEV3_MDS	

**Table 2-4 (Cont.) Values for updating installobp\*\*\*.properties**

Sr. No	Name	Description	Example Value	Value
105	OES_SCHEMA_PASSWORD	Password of OES DB schema	Welcome1	
106	OES_DB_SERVICE_NAME	Service name of OES DB	OBPDB	
107	HOST_DB_SCHEMA_CREATION_FLAG	Flag for Host application DB schema creation	Y	
108	OID_FARM_AND_POLICY_SEEDING_FLAG	Flag for OID farm creation and policy seeding	Y	
109	BIP_REPORTS_UPLOADING_FLAG	Flag for BIP reports uploading	Y	
110	USER_TIMEZONE	Time zone entry	+5:30	
111	SILENT_INSTALL	Flag for installing silent or interactive mode	y	
112	DOMAIN_NAME	Name of the WebLogic domain to be created	ui_domain or host_domain or base_domain	
113	UI_ADMIN_SERVER_LISTEN_ADDRESS	Listen address of UI admin server	10.180.25.23	
114	UI_ADMIN_SERVER_LISTEN_PORT	Listen port of UI admin server	8001	
115	SOA_IP	IP address of SOA machine	10.180.25.113	
116	SOA_UNIX_USER	Unix username of SOA machine	ofssobp	
117	SOA_MW_HOME	Refers to the middleware home of the WebLogic installation on the SOA server.	/scratch/app/product/fmw	
118	SOA_WEBLOGIC_USERNAME	Username of the server of SOA domain	WebLogic	
119	SOA_WEBLOGIC_PASSWORD	Password of the server of SOA domain	WebLogic1	
120	UI_DOMAIN_NAME	Name of UI domain	Ui_domain	
121	BIP_SERVER_PSWD	Password of BIP server	WebLogic1	

**Table 2-4 (Cont.) Values for updating *installobp\*\*\*.properties***

Sr. No	Name	Description	Example Value	Value
122	UI_MANAGED_SERVER_LISTEN_ADDRESS	Listen address of UI managed server	10.180.25.23	
123	UI_MANAGED_SERVER_LISTEN_PORT	Listen port of UI managed server	8001	
124	DOCUMAKER_SERVER_IP	IP address of Documaker server	10.180.25.64	
125	DOCUMAKER_SERVER_PORT	Listen port of Documaker server	8005	
126	HOST_DB_SCHEMA_PREFIX	Prefix of HOST application DB schema (Maximum length of characters: 12)	DEV	
127	HOST_ADMIN_SERVER_LISTEN_ADDRESS	Listen address of HOST admin server	10.180.25.15	
128	HOST_ADMIN_SERVER_LISTEN_PORT	Listen port of HOST admin server	8001	
129	SOA_TARGET	Target folder of SOA machine where files will be copied temporarily during installation	/scratch/app/product/fmw/target	
130	BAM_SERVER_LISTEN_ADDRESS	Listen address of BAM server	10.180.25.113	
131	BAM_SERVER_LISTEN_PORT	Listen port of BAM server	9003	
132	BAM_SERVER_SSL_LISTEN_PORT	SSL listen port of BAM server	9004	
133	UI_DOMAIN_HOME	Full path of UI domain	/scratch/app/product/fmw/user_projects/domains/ui_domain	
134	DB_IP	IP address of the machine where DB schemas for SOA created	10.180.24.54	
135	DB_PORT	Port of the DB where DB schemas for SOA created	1521	

**Table 2–4 (Cont.) Values for updating installobp\*\*\*.properties**

Sr. No	Name	Description	Example Value	Value
136	DB_SERVICE_NAME	Service name of the DB where DB schemas for SOA created		
137	CARD_USERNAME	Username of Card connector	orakey	
138	CARD_PASSWORD	Password of Card connector	welcome1	
139	RULE_USERNAME	Username of Rule connector	orakey	
140	RULE_PASSWORD	Password of Rule connector	welcome1	
141	BAM_USERNAME	Username of BAM connector	WebLogic	
142	BAM_PASSWORD	Password of BAM connector	WebLogic1	
143	DEFAULT_BANK_CODE (For SOA)	Default bank code will be set while configuring SOA domain	48	
144	DEFAULT_TRANSACTION_BRANCH_CODE (For SOA)	Default branch code will be set while configuring SOA domain	8542	
145	DEFAULT_TARGET_UNIT (For SOA)	Default target unit will be set while configuring SOA domain	TARGET_NAME	
146	UI_HOST_NAME	Host name of the UI machine	Ofss25879	
147	SOA_ORACLE_HOME	Name of Oracle SOA which is present in fusion middleware	OracleSOA1	

## 2.3.2 Database and WebLogic Domain Configuration

The following table lists the other information which should be kept handy to make this installation easy.

**Table 2–5 Oracle Banking Platform DB and WebLogic Domain Configuration**

Sr. No.	Name	Description and Example	Value
<b>UI and Host Linux user login details</b>			
1.	UI / Presentation Linux server user id	This is the same as the INSTALL_AS captured in the checklist above.	
2.	UI / Presentation Linux server user password	Password for the user specified against INSTALL_AS.	

**Table 2–5 (Cont.) Oracle Banking Platform DB and WebLogic Domain Configuration**

<b>Sr. No.</b>	<b>Name</b>	<b>Description and Example</b>	<b>Value</b>
3.	Host Linux server user id	This is the same as the INSTALL_AS captured in the checklist above	
4.	Host Linux server user password	Password for the user specified against INSTALL_AS.	
<b>Database Details</b>			
5.	IP address of the Oracle Banking Platform Oracle DB server	10.180.90.30	
6.	Port of the Oracle Banking Platform Oracle DB instance	1521	
7.	Oracle Banking Platform DB Service Name	OBPDB	
8.	Oracle Banking Platform DB sys password	*****	
<b>Additional UI Install Checklist</b>			
9.	Admin user id and password for the Oracle Banking Platform UI domain.	The default admin user id is WebLogic. Decide on the password to be used and note it.	
10.	List of port numbers for the Oracle Banking Platform UI domain for: Admin server HTTP port for managed server HTTPS port for managed server	Default Values Admin Server Port: 7001 Managed Server http port: 15308 Managed Server https port: 15309	
11.	Password for the key generated to establish trust between the Oracle Banking Platform UI and Host.	Decide on the password to be used and note it. This is required for the post installation tasks of UI domain.	
12.	Password for keystore generated to establish trust.	Decide on the password to be used and note it. This is required for the post installation tasks UI domain.	
<b>Additional Host Install Checklist</b>			
13.	Admin user id and password for the Oracle Banking Platform Host domain.	The default admin user id is WebLogic. Decide on the password to be used and note it.	

**Table 2–5 (Cont.) Oracle Banking Platform DB and WebLogic Domain Configuration**

Sr. No.	Name	Description and Example	Value
14.	List of port numbers for the Oracle Banking Platform Host domain for:  Admin server HTTP port for managed server HTTPS port for managed server	Default Values  Admin Server Port: 7001 Managed Server http port: 15308 Managed Server https port: 15309	
15.	Password for the key generated to establish trust between the Oracle Banking Platform UI and Host.	This is same as password in row 11. This is required for the post installation tasks of host domain.	
16.	Password for keystore generated to establish trust.	This is same as password in row 12. This is required for the post installation tasks of host domain.	
<b>Additional OBP IPM checklist for Section 9</b>			
17	OBP_IPM_MAIN_APP_NAME	Used to create the MAIN application that would be used to manage the content such as outbound communications, inbound documents, and so on. This application will be used actively by OBP at runtime.	
18	OBP_IPM_TEMP_APP_NAME	Used to create the TEMP application that would archive old documents. This application will not be used actively by OBP at runtime.	
19	OBP_IPM_SOA_CONN_NAME	Used as the name for creation of the workflow connection.	

## 2.4 OID Schema Setup – Custom OBP Schema

This section describes the OID Schema setup which is a pre-installation configuration required for Oracle Banking Platform setup.

### 2.4.1 Prerequisite – OID setup

It is assumed that OID 11.1.1.7 is installed with ODSM and configured. We can thereafter proceed to the next step of setting up the OBP policy store. OID works better when installed on OEL. See [Section 2.1.2, "Software Environment"](#) for version information of the software products.

### 2.4.2 Verify the OID installation

This section describes the procedure to verify the OID installation.

### 2.4.2.1 Start and Verify the OID processes


Log in to the Linux console with user id `oracle`, navigate to the 'bin' directory of the OID instance and start the OID processes using the commands as follows:

For example, if the OID installation is in `/oracle/app/product/fmw/asinst_1`

```
cd /oracle/app/product/fmw/asinst_1/bin
```

```
./opmnctl startall
```


**Figure 2–2 Locate the OID Instance**

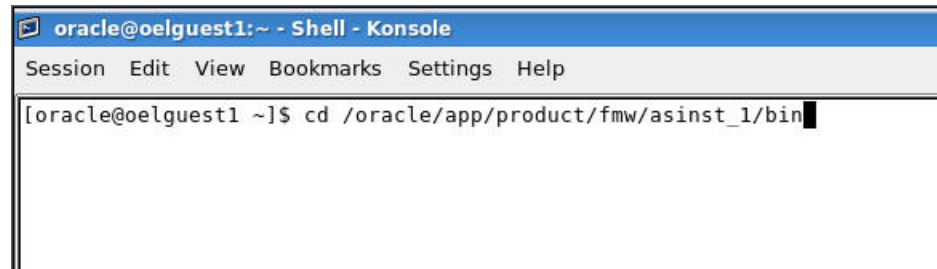

```
oracle@oelguest1:~ - Shell - Konsole
Session Edit View Bookmarks Settings Help
[oracle@oelguest1 ~]$ cd /oracle/app/product/fmw/asinst_1/bin
```

The `./opmnctl startall` command should result in a starting `opmn` and all managed processes message on the screen.

**Figure 2–3 Start the OID Instance**

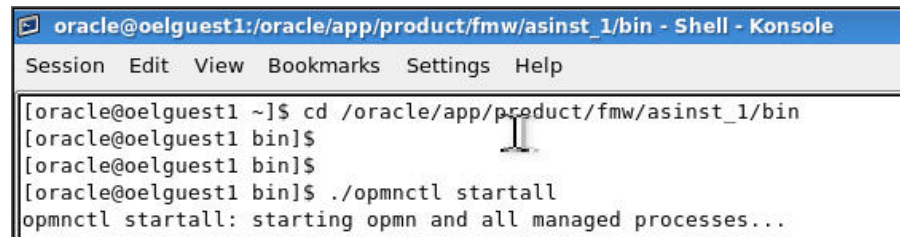


```
oracle@oelguest1:/oracle/app/product/fmw/asinst_1/bin - Shell - Konsole
Session Edit View Bookmarks Settings Help
[oracle@oelguest1 ~]$ cd /oracle/app/product/fmw/asinst_1/bin
[oracle@oelguest1 bin]$
[oracle@oelguest1 bin]$
[oracle@oelguest1 bin]$ ./opmnctl startall
opmnctl startall: starting opmn and all managed processes...
```

After the prompt returns, run the following command to check the status of OID processes:

```
./opmnctl status
```

**Figure 2–4 Verify the Status of OID Instance**

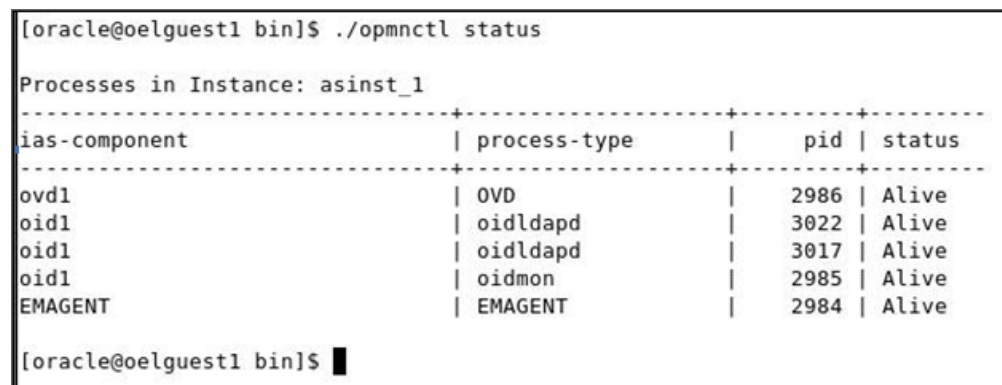

```
[oracle@oelguest1 bin]$ ./opmnctl status
Processes in Instance: asinst_1
-----+-----+-----+-----+
ias-component          | process-type        | pid | status
-----+-----+-----+-----+
ovd1                   | OVD                 | 2986 | Alive
oid1                   | oidldapd            | 3022 | Alive
oid1                   | oidldapd            | 3017 | Alive
oid1                   | oidmon              | 2985 | Alive
EMAGENT               | EMAGENT             | 2984 | Alive
[oracle@oelguest1 bin]$
```

### 2.4.2.2 OID Performance Tuning

The following changes are required in OID before initiating OBP installation:

1. Change the following parameter values as given:

**Table 2–6 Parameter Values to be Changed**

Parameter Name	Value
orclmaxcc (Number of DB Connections per Server Process)	10
orclserverprocs (Number of OID LDAP Server Processes)	4
orclgeneratechangelog (Change log Generation)	0
orclldapconntimeout (LDAP Connection Timeout)	60
orclmatchdenabled (Enable MatchDN Processing)	0

2. Advanced OID tuning:

- a. Create a .ldif file with any name. For example, tune.ldif.

- b. Enter the following information in that file and save it:

```
dn: cn=dsconfig,cn=configsets,cn=oracle internet directory
```

```
changetype: modify
```

```
replace: orclecachemaxsize
```

```
orclecachemaxsize: 3g
```

```
-
```

```
replace: orclecachemaxentries
```

```
orclecachemaxentries: 500000
```

- c. Then in command prompt, navigate to that directory and run it using the following command:

---

**Note:** Ensure that 'ldapmodify' is available on the machine.

---

```
$ORACLE_HOME/bin/ldapmodify -h <<OIDIP>> -p <<OIDPORT>> -D
<<OIDUSERNAME>> -w <<OIDPASSWORD>> -f <<FILENAME>>
```

Example:

```
$ORACLE_HOME/bin/ldapmodify -h 10.180.25.116 -p 3060 -D
cn=orcladmin -w welcome1 -f tune.ldif
```

3. See the OID Tuning Guide available at [http://docs.oracle.com/cd/E23943\\_01/core.1111/e10108/oid.htm#ASPER99961](http://docs.oracle.com/cd/E23943_01/core.1111/e10108/oid.htm#ASPER99961)

4. Patch for OID:

Download and apply the patch (13879999) for OID performance from <http://support.oracle.com>

5. Changes in **jps-config.xml**:

The property '**authorization\_cache\_enabled**' needs to be added to ensure that authorization cache is enabled for the ADF enabled applications. These changes are required to be done in **jps-config.xml** which is located at the following path:



<DOMAIN-HOME>/config/fmwconfig/jps-config.xml

**Example:**

```
<propertySet name="props.ldap.1">
<property name="authorization_cache_enabled" value="true"/>
<property name="connection.pool.min.size" value="20"/>
<property name="connection.pool.max.size" value="40"/>
<property name="connection.pool.provider.type" value="IDM"/>
<property name="connection.pool.timeout" value="300000"/>
<property name="connection.pool.provider.type" value="5"/>
<property name="oracle.security.jps.policystore.rolemember.cache.type"
value="STATIC"/>
<property name="oracle.security.jps.policystore.rolemember.cache.strategy"
value="NONE"/>
<property name="oracle.security.jps.policystore.rolemember.cache.size"
value="100"/>
<property name="oracle.security.jps.policystore.policy.lazy.load.enable"
value="true"/>
<property name="oracle.security.jps.policystore.policy.cache.strategy"
value="NONE"/>
<property name="oracle.security.jps.policystore.policy.cache.size"
value="1000000"/>
<property name="oracle.security.jps.policystore.refresh.enable" value="true"/>
<property name="oracle.security.jps.policystore.refresh.purge.timeout"
value="43200000"/>
<property name="oracle.security.jps.ldap.policystore.refresh.interval"
value="6000000"/>
<property name="oracle.security.jps.policystore.rolemember.cache.warmup.enable"
value="true"/>
```

All the above properties should also be added in the **<pdp.service> service-instance**.

**Example:**

```
<serviceInstance name="pdp.service" provider="pdp.service.provider">
  <description>Runtime PDP service instance</description>
<property name="authorization_cache_enabled" value="true"/>
<property name="connection.pool.min.size" value="20"/>
<property name="connection.pool.max.size" value="40"/>
<property name="connection.pool.provider.type" value="IDM"/>
<property name="connection.pool.timeout" value="300000"/>
<property name="connection.pool.provider.type" value="5"/>
<property name="oracle.security.jps.policystore.rolemember.cache.type"
value="STATIC"/>
<property name="oracle.security.jps.policystore.rolemember.cache.strategy"
value="NONE"/>
<property name="oracle.security.jps.policystore.rolemember.cache.size"
value="100"/>
<property name="oracle.security.jps.policystore.policy.lazy.load.enable"
value="true"/>
<property name="oracle.security.jps.policystore.policy.cache.strategy"
value="NONE"/>
<property name="oracle.security.jps.policystore.policy.cache.size"
value="1000000"/>
<property name="oracle.security.jps.policystore.refresh.enable" value="true"/>
<property name="oracle.security.jps.policystore.refresh.purge.timeout"
value="43200000"/>
<property name="oracle.security.jps.ldap.policystore.refresh.interval"
value="6000000"/>
<property name="oracle.security.jps.policystore.rolemember.cache.warmup.enable"
```

```
value="true"/>
</serviceInstance>
```

### 2.4.2.3 Import OBP Specific LDIF files

Start by checking the OID for the presence of jpsroot, fcperson, Users, Groups, WebLogic and Administrators. If they are already present, no modification is required in OID. However, if they are not present, then they can be added as described below:

---



---

**Note:** Ensure that 'ldapadd' and 'ldapmodify' are available on the machine.

---



---

1. Extract the 'host.zip' to obtain 'obpinstall-host.zip'. It contains ldif.zip.
2. Extract ldif.zip. It will create a folder named LDIF with six LDIF files as follows:
  - jpsroot.ldif
  - fcPerson.ldif
  - Users.ldif
  - Groups.ldif
  - WebLogic.ldif
  - Administrators.ldif
3. These are to be used and updated in the OID if necessary. The execution commands for uploading these LDIF files are given below. The execution order must be maintained as described.

**Table 2–7 Order of Execution**

Sr. No.	LDIF File Name	Description
1	jpsroot	Creates jpsroot and jpscontext
2	fcPerson	Creates fcPerson object class
3	Users	Creates OFSSUser
4	Groups	Creates OFSS_Role and offlinerole
5	WebLogic	Creates WebLogic user
6	Administrators	Creates Administrators Group

4. DNS should be changed as per the requirement of the bank in the LDIF files for:
  - Users
  - Groups
  - WebLogic
  - Administrators

---

---

**Note:** While executing fcPerson.ldif , “value already exist” problem may appear in console.

For this problem, the objectClasses value is required to be changed.

It can be found, at the end of the file as:

```
“add:objectClasses
```

```
objectClasses:(2.5.6.47”
```

To resolve this problem, change the value (default, it is 2.5.6.47) of object classes, then run it again.

---

---

Before executing the following commands, navigate to the location where the LDIF files reside (that is, inside LDIF folder).

#### **ldapadd jpsroot.ldif**

```
ldapadd -h $ldapIP -p $ldapPort -D cn=orcladmin -w welcome1 -c -v -f  
jpsroot.ldif
```

#### **ldapmodify fcPerson.ldif**

```
ldapmodify -h $ldapIP -p $ldapPort -D cn=orcladmin -w welcome1 -c -v -f  
fcPerson.ldif
```

#### **ldapadd Users.ldif**

```
ldapadd -h $ldapIP -p $ldapPort -D cn=orcladmin -w welcome1 -c -v -f  
Users.ldif
```

#### **ldapadd Groups.ldif**

```
ldapadd -h $ldapIP -p $ldapPort -D cn=orcladmin -w welcome1 -c -v -f  
Groups.ldif
```

#### **ldapadd WebLogic.ldif**

```
ldapadd -h $ldapIP -p $ldapPort -D cn=orcladmin -w welcome1 -c -v -f  
Weblogic.ldif
```


#### **ldapadd Administrators.ldif**

```
ldapadd -h $ldapIP -p $ldapPort -D cn=orcladmin -w welcome1 -c -v -f  
Administrators.ldif
```

#### **2.4.2.4 Verify the import using ODSM or JXplorer**

The import of Oracle Banking Platform specific LDIF files can be verified using JXplorer.

Figure 2-5 JXplorer

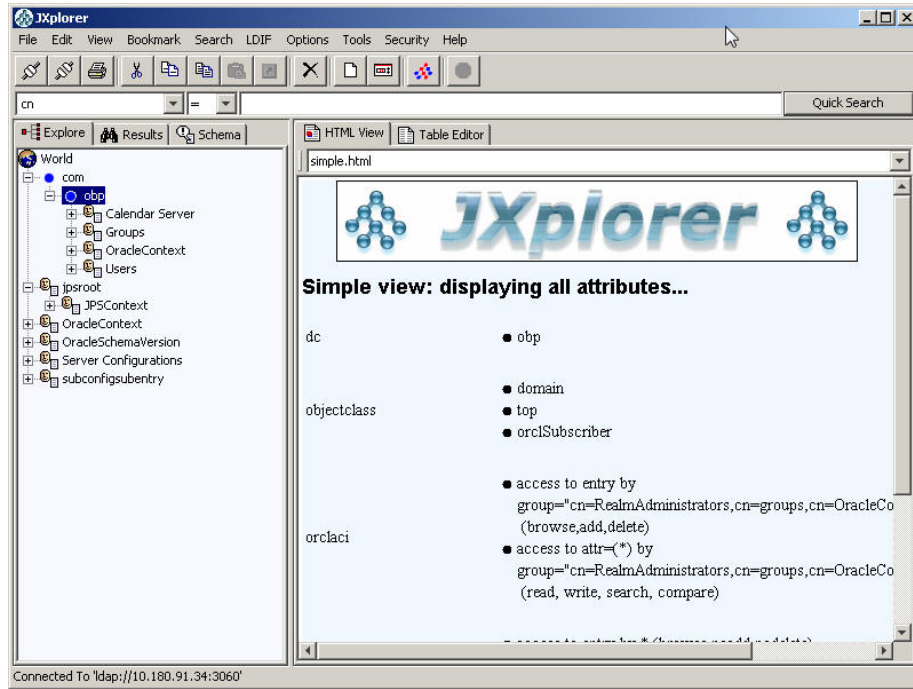

---

---

# Oracle Banking Platform Host Media Pack Installation

This chapter details every step involved in the installation of Oracle Banking Platform Host Media pack. The subsequent section refers to the variable names specified in [Section 2.3, "Installation Checklists"](#).

## 3.1 Installation and Configuration Procedure

This section details the installation procedure for the Oracle Banking Platform Host Media Pack.

### 3.1.1 Preparatory Steps

This section lists the preparatory steps required for the Oracle Banking Platform Host Media Pack installation.

#### Step 1 Procuring Installables

Download the appropriate host media pack from the following location:

<http://edelivery.oracle.com/>

#### Step 2 Extracting the Installables

Copy the 'host.zip' to a local Linux VM or Linux machine from where the installation will be carried out. Extract the 'host.zip'. Four files will be extracted:

- A zip file 'obpinstall-host.zip'
- The installation script 'installobphost.sh'
- The install configuration property file 'installobphost.properties'
- A zip file 'em\_monitor.zip' that is used for monitoring (For more information, see [Chapter 10, "Monitoring Servers Using Oracle Enterprise Manager."](#)).

#### Step 3 Printing Checklists

Take a printout of the installation checklist mentioned in [Section 2.3, "Installation Checklists"](#) of this document and note the values applicable for each point in the last column for "Value" so that the same is handy during the actual installation.

### 3.1.2 Pre-Installation Steps

This section lists the pre-installation steps required for the Oracle Banking Platform Host Media Pack installation.

**Step 1 Updating installobphost.properties**

Navigate to the directory where the files obpinstall-host.zip, installobphost.sh and installobphost.properties are placed and update installobphost.properties with relevant values from the checklist.

**Step 2 Checklist for a new setup**

Before initiating installation on a completely new setup, check the following:


- Node manager must not be running on the target machine.
- Create a dummy folder named as Target and mention its path against HOST\_TARGET property.
- In case of a re-installation ensure that the directory paths against DOMAIN\_DIRECTORY\_LOCATION, OES\_MW\_HOME, HOST\_TARGET and HOST\_MW\_HOME specified in installobphost.properties are cleaned up for traces of any previous installations, as the remote shell copy may not be overwriting in case of any residual file left by the previous run.
- No processes should be running on the ports in HOST and OES machine given in installobphost.properties.
- Values in installobphost.properties must be correct. At run time no option is given to change them.
- No other schema should exist in db with the same prefix as HOST\_DB\_SCHEMA\_PREFIX specified in installobphost.properties. OBP\_HOST\_DB\_USER should be given on the basis of HOST\_DB\_SCHEMA\_PREFIX.  
For example, if HOST\_DB\_SCHEMA\_PREFIX is DEV, then OBP\_HOST\_DB\_USER should be DEV\_OBP\_HOST.
- OID\_DOMAIN\_NAME in installobphost.properties should match with the OID\_DOMAIN\_NAME given in installobpui.properties. Any other domain with the same name must not exist in OID. The domain in OID will be created in host pre-install.
- OBP\_HOST\_DB\_USER and BIP\_DATASOURCE\_NAME must be same in installobphost.properties.
- The following schemas are manually created prior to installation and are available for updation in the checklist:
  - MDS\_HOST\_DB\_USER (by RCU 11.1.1.7)
  - OBP\_HOST\_DB\_USER (by RCU 11.1.1.6)
  - OES\_SCHEMA\_USER (by RCU 11.1.1.6)
- MDS\_HOST\_DB\_USER as updated in installobphost.properties and MDS\_SCHEMA\_USER as updated in installobpui.properties should point to the same MDS db schema.
- Oracle Text 11g must be installed in Host db.
- An OES WebLogic domain must exist and the admin server of this domain must be in running state prior to pre-installation.

**3.1.3 Installation Steps**

This section lists the installation steps required for the Oracle Banking Platform Host Media Pack installation.

1. Navigate to the directory where the media pack files are placed and execute `installobphost.sh`. The installation script shall echo the values entered in the `installobpui.properties` file and ask for confirmation to go ahead with the installation.
2. The installation script automatically triggers the following significant steps using secure remote copy 'scp' command and remote shell commands execution using the 'ssh' command.

**Figure 3–1 Steps in `installobphost.sh` script**

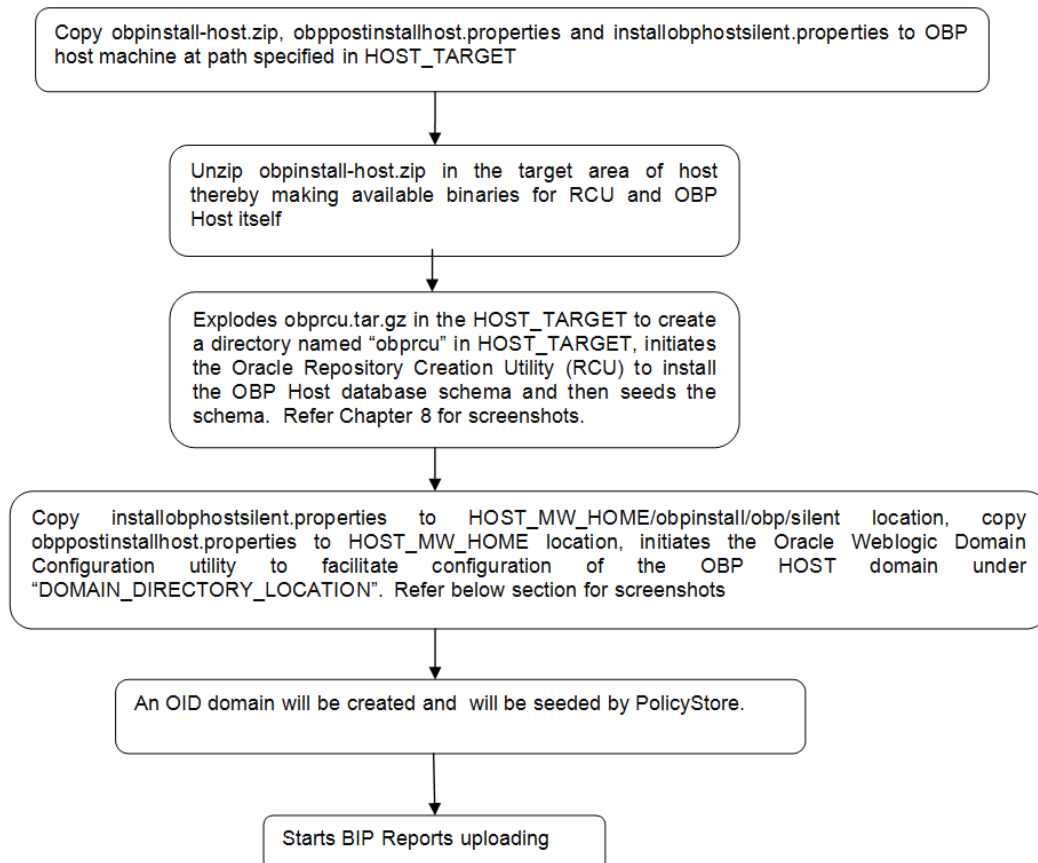

A sample output is given here.

**Figure 3–2 Verification of Properties**

```

ofssobp@ofss3131506:/scratch/install/host
[ofssobp@ofss3131506 host]$ ./installobphost.sh
The present working directory is /scratch/install/host. It is assumed that all installables are present in this directory.
Printing the information:
SILENT_INSTALL                : y
HOST_DB_SCHEMA_CREATION_FLAG  : N
OID_FARM_AND_POLICY_SEEDING_FLAG : N
BIP_REPORTS_UPLOADING_FLAG    : N
LOCAL_IP                      : 10.180.91.52
LOCAL_DISPLAY_VALUE           : 0.0
DOMAIN_NAME                   : host_domain
DOMAIN_DIRECTORY_LOCATION     : /scratch/app/product/fmw/user_projects/domains
WEBLOGIC_USERNAME             : weblogic
WEBLOGIC_PASSWORD             : weblogic1
ADMIN_SERVER_LISTEN_ADDRESS    : 10.180.85.39
ADMIN_SERVER_LISTEN_PORT      : 7001
ADMIN_SERVER_SSL_LISTEN_PORT   : 7002
MANAGED_SERVER_LISTEN_ADDRESS : 10.180.85.39
MANAGED_SERVER_LISTEN_PORT    : 8001
MANAGED_SERVER_SSL_LISTEN_PORT : 8002
POLICY_SEEDING_TYPE           : LDAP
LDAP_PROVIDER                 : OID
OID_IP                        : 10.180.85.42
OID_ADMIN_USER                : cn=orcladmin
OID_ADMIN_FWD                 : welcome1
OID_DOMAIN_NAME               : ouidomain
OID_DOMAIN_PORT               : 7005
OID_GROUP_DSN                 : cn=Groups,dc=in,dc=oracle,dc=com
OID_USER_DSN                  : cn=Users,dc=in,dc=oracle,dc=com
JPS_CONTEXT_DSN               : cn=jpsroot
NODE_MGR_PORT                 : 5556
HOST_IP                      : 10.180.85.39
HOST_TARGET                   : /scratch/app/product/fmw/target
HOST_JAVA_HOME                : /scratch/app/product/jrockit-jdk1.6.0_51
HOST_MW_HOME                  : /scratch/app/product/fmw
UI_ADMIN_SERVER_LISTEN_ADDRESS : 10.180.85.40
UI_ADMIN_SERVER_LISTEN_PORT   : 7001
SOA_IP                        : 10.180.85.41
SOA_UNIX_USER                 : ofssobp
SOA_MW_HOME                   : /scratch/app/product/fmw
SOA_WEBLOGIC_USERNAME         : weblogic
SOA_WEBLOGIC_PASSWORD         : weblogic1
SOA_MANAGED_SERVER_LISTEN_ADDRESS : 10.180.85.41
SOA_MANAGED_SERVER_LISTEN_PORT : 8001
UI_IP                         : 10.180.85.40
UI_UNIX_USER                  : ofssobp
UI_DOMAIN_HOME                : /scratch/app/product/fmw/user_projects/domains/ui_domain
INSTALL_AS                   : ofssobp
BIP_SERVER_IP                 : 10.180.9.73
BIP_SERVER_PORT               : 9704
BIP_UNIX_USER                 : oracle
BIP_HOME                      : /oracle/app/product/fmw1/Oracle_BI1
BIP_INSTANCE_PATH             : /oracle/app/product/fmw1/instances/instance1
BIP_SERVER_USER               : weblogic
BIP_SERVER_PSWD               : weblogic1
BIP_REPORT_BASE_PATH          : /OBP3/R2BINSTALLER3
BIP_DATASOURCE_NAME           : forhdevsails40
IPM_SERVER_IP                 : 10.180.9.97
IPM_SERVER_PORT               : 16000
OFSAA_SERVER_IP               : ofssaa-ofss.com
OFSAA_SERVER_PORT             : 17000

```

3. Verify the value of each property carefully before proceeding.
4. If all values are correct, then enter 'Y' or 'y' and press Enter to initiate the installation. The installation utility performs the installation and domain is created silently.



Figure 3–3 Confirmation and Copying of Installables to Target Machine

```

root@FLMUD51M00385:/opt/oracle/fmw/sudip_MW_11.1.1.6/mediapack_silent/host
HOST_ADMIN_JVM_PARAMS      : -Xms512m -Xmx1024m -Xgc:gencon -XXnoSystemgc
HOST_MANAGED_JVM_PARAMS   : -XXaggressive -Xms4096m -Xmx4096m -Xgc:pausetime -XXnoSystemgc -XX:-FlightRecorder
IPM_OUTBOUND_USERNAME     : ipmweblogic
IPM_OUTBOUND_PASSWORD     : weblogic1
BIP_OUTBOUND_USERNAME     : bipweblogic
BIP_OUTBOUND_PASSWORD     : weblogic1
ODI_OUTBOUND_USERNAME     : odiweblogic
ODI_OUTBOUND_PASSWORD     : weblogic1
OIM_OUTBOUND_USERNAME     : oimweblogic
OIM_OUTBOUND_PASSWORD     : weblogic1
WCM_OUTBOUND_USERNAME     : wcmweblogic
WCM_OUTBOUND_PASSWORD     : weblogic1
OFFLINE_CHANNEL_OUTBOUND_USERNAME : offlinechannelweblogic
OFFLINE_CHANNEL_OUTBOUND_PASSWORD : weblogic1
SAML_ISSUER_OUTBOUND_USERNAME : samlissuerweblogic
SAML_ISSUER_OUTBOUND_PASSWORD : weblogic1
BPCL_ENCRYPTION_OUTBOUND_USERNAME : bpclencryptionweblogic
BPCL_ENCRYPTION_OUTBOUND_PASSWORD : weblogic1
FTP_IPM_OUTBOUND_USERNAME : ftpipmweblogic
FTP_IPM_OUTBOUND_PASSWORD : weblogic1
BIP_USR_OUTBOUND_USERNAME : bipusrweblogic
BIP_USR_OUTBOUND_PASSWORD : weblogic1
SOA_PURGING_OUTBOUND_USERNAME : soapurgingweblogic
SOA_PURGING_OUTBOUND_PASSWORD : weblogic1
SOA_OUTBOUND_USERNAME     : soaweblogic
SOA_OUTBOUND_PASSWORD     : weblogic1
ATMUSER_OUTBOUND_USERNAME : atmuserweblogic
ATMUSER_OUTBOUND_PASSWORD : weblogic1
POSUSER_OUTBOUND_USERNAME : posuserweblogic
POSUSER_OUTBOUND_PASSWORD : weblogic1
DMSHOST_OUTBOUND_USERNAME : dmshostweblogic
DMSHOST_OUTBOUND_PASSWORD : weblogic1
DMSUI_OUTBOUND_USERNAME   : dmsuiweblogic
DMSUI_OUTBOUND_PASSWORD   : weblogic1
KEYSTORE_PASSWORD         : welccm1
UCM_READ_FROM_URL         : true
UCM_IP                     : ofss.ucm.com
UCM_PORT                   : 4444

Please take your time and go through the information printed above in detail.
If the above mentioned information is correct, please enter Y or y to proceed. Press any other key to exit the installation.
y
Installation will begin in sometime.
Please wait while the installables are copied onto the servers.

#####
This computer including any devices attached to this computer and the
information systems accessed from this point contain information that is
confidential.

Your activities and use of these facilities are monitored.
Your use of (and related activities in connection with) these facilities is
recorded and may be reviewed at any time.

For Support You may Contact,
InfraStructure Team
#####

oracle@10.180.25.15's password:
obpininstall-host.zip
81% 606MB 11.2MB/s 00:12 ETA

```

5. After copying, there is host DB schema creation and seeding.

After extracting the installables, the domain gets installed and a confirmation message is shown.

Figure 3–4 Domain Installation Confirmation

```

root@IFLMUD5IM00385:/opt/oracle/fmw/sudip_MW_11.1.1.6/mediapack_silent/host
obpininstall/inventory/Templates/rdcms/
obpininstall/inventory/Templates/rdcms/install/
obpininstall/inventory/Templates/rdcms/install/sbs/
obpininstall/inventory/Templates/rdcms/install/sbs/diagsetup.sbs
obpininstall/inventory/Templates/rdcms/install/sbs/sum.sbs
obpininstall/inventory/Templates/rdcms/install/sbs/initmsa.sbs
obpininstall/inventory/Templates/rdcms/install/sbs/dbmsaml.sbs
obpininstall/inventory/Templates/rdcms/install/sbs/ums.sbs
obpininstall/inventory/Templates/rdcms/demo/
obpininstall/inventory/Templates/rdcms/demo/sgxml.conf
CLASSPATH=/oracle/app/product/fmw/patch_wls1035/profiles/default/sys_manifest_classpath/weblogic_patch.jar:/oracle/app/product/fmw/patch_ocp360/profiles/default/sys_manifest_classpath/weblogic_patch.jar:/oracle/app/product/oracle_jrockitjdk1.6.0_31_R28.2.3/lib/tools.jar:/oracle/app/product/fmw/wlserver_10.3/server/lib/weblogic_sp.jar:/oracle/app/product/fmw/wlserver_10.3/server/lib/weblogic.jar:/oracle/app/product/fmw/modules/features/weblogic.server.modules_10.3.5.0.jar:/oracle/app/product/fmw/wlserver_10.3/server/lib/webserver.jar:/oracle/app/product/fmw/modules/org.apache.ant_1.7.1/lib/ant-all.jar:/oracle/app/product/fmw/modules/net.sf.antcontrib_1.1.0.0_1-0b2/lib/ant-contrib.jar:/oracle/app/product/fmw/obpininstall/common/wlst/resources/wsm-wlst.jar:/oracle/app/product/fmw/oracle_common/modules/oracle_jps_11.1.1/jps-wls-trustprovider.jar:/oracle/app/product/fmw/oracle_common/modules/oracle_jrf_11.1.1/jrf-wlstman.jar:/oracle/app/product/fmw/oracle_common/common/wlst/lib/adfscripting.jar:/oracle/app/product/fmw/oracle_common/common/wlst/lib/adf-share-mbeans-wlst.jar:/oracle/app/product/fmw/oracle_common/common/wlst/lib/mdwvst.jar:/oracle/app/product/fmw/oracle_common/common/wlst/resources/auditvst.jar:/oracle/app/product/fmw/oracle_common/common/wlst/resources/igwvsthelp.jar:/oracle/app/product/fmw/oracle_common/common/wlst/resources/jps-wlst.jar:/oracle/app/product/fmw/oracle_common/common/wlst/resources/oamap_help.jar:/oracle/app/product/fmw/oracle_common/common/wlst/resources/oamAuthnProvider.jar:/oracle/app/product/fmw/oracle_common/common/wlst/resources/ossolap_help.jar:/oracle/app/product/fmw/oracle_common/common/wlst/resources/ossolap.jar:/oracle/app/product/fmw/oracle_common/common/wlst/resources/ovdwsthelp.jar:/oracle/app/product/fmw/oracle_common/common/wlst/resources/ssiconfigvst.jar:/oracle/app/product/fmw/oracle_common/common/wlst/resources/wsm-wlst.jar

PATH=/oracle/app/product/fmw/wlserver_10.3/server/bin:/oracle/app/product/fmw/modules/org.apache.ant_1.7.1/bin:/oracle/app/product/oracle_jrockitjdk1.6.0_31_R28.2.3/jre/bin:/oracle/app/product/oracle_jrockitjdk1.6.0_31_R28.2.3/bin:/usr/kerberos/bin:/usr/local/bin:/bin:/usr/bin

Your environment has been set.

CLASSPATH=/oracle/app/product/fmw/patch_wls1035/profiles/default/sys_manifest_classpath/weblogic_patch.jar:/oracle/app/product/fmw/patch_ocp360/profiles/default/sys_manifest_classpath/weblogic_patch.jar:/oracle/app/product/oracle_jrockitjdk1.6.0_31_R28.2.3/lib/tools.jar:/oracle/app/product/fmw/wlserver_10.3/server/lib/weblogic_sp.jar:/oracle/app/product/fmw/wlserver_10.3/server/lib/weblogic.jar:/oracle/app/product/fmw/modules/features/weblogic.server.modules_10.3.5.0.jar:/oracle/app/product/fmw/wlserver_10.3/server/lib/webserver.jar:/oracle/app/product/fmw/modules/org.apache.ant_1.7.1/lib/ant-all.jar:/oracle/app/product/fmw/modules/net.sf.antcontrib_1.1.0.0_1-0b2/lib/ant-contrib.jar:/oracle/app/product/fmw/obpininstall/common/wlst/resources/wsm-wlst.jar:/oracle/app/product/fmw/oracle_common/modules/oracle_jps_11.1.1/jps-wls-trustprovider.jar:/oracle/app/product/fmw/oracle_common/modules/oracle_jrf_11.1.1/jrf-wlstman.jar:/oracle/app/product/fmw/oracle_common/common/wlst/lib/adfscripting.jar:/oracle/app/product/fmw/oracle_common/common/wlst/lib/adf-share-mbeans-wlst.jar:/oracle/app/product/fmw/oracle_common/common/wlst/lib/mdwvst.jar:/oracle/app/product/fmw/oracle_common/common/wlst/resources/auditvst.jar:/oracle/app/product/fmw/oracle_common/common/wlst/resources/igwvsthelp.jar:/oracle/app/product/fmw/oracle_common/common/wlst/resources/jps-wlst.jar:/oracle/app/product/fmw/oracle_common/common/wlst/resources/oamap_help.jar:/oracle/app/product/fmw/oracle_common/common/wlst/resources/oamAuthnProvider.jar:/oracle/app/product/fmw/oracle_common/common/wlst/resources/ossolap_help.jar:/oracle/app/product/fmw/oracle_common/common/wlst/resources/ossolap.jar:/oracle/app/product/fmw/oracle_common/common/wlst/resources/ovdwsthelp.jar:/oracle/app/product/fmw/oracle_common/common/wlst/resources/ssiconfigvst.jar:/oracle/app/product/fmw/oracle_common/common/wlst/resources/wsm-wlst.jar:/oracle/app/product/fmw/modules/org.apache.ant_1.7.1/bin:/oracle/app/product/oracle_jrockitjdk1.6.0_31_R28.2.3/jre/bin:/oracle/app/product/oracle_jrockitjdk1.6.0_31_R28.2.3/bin:/usr/kerberos/bin:/usr/local/bin:/bin:/usr/bin

Initializing WebLogic Scripting Tool (WLST) ...

Welcome to WebLogic Server Administration Scripting Shell

Type help() for help on available commands

Domain creation started...
Read domain /oracle/app/product/fmw/user_projects/domains/host_domain to applyJRF
Copy JRF configuration files from /oracle/app/product/fmw/oracle_common/modules to /oracle/app/product/fmw/user_projects/domains/host_domain/config/fmwconfig/servers/obphost_server1
Target JRF components to "obphost_cluster1"
Update JRF changes to domain /oracle/app/product/fmw/user_projects/domains/host_domain in offline mode
Domain created successfully.
    
```

6. After completion of domain installation, it will proceed to OID domain creation and seeding.

Figure 3–5 OID Domain Creation and Seeding

```

oracle@OFSMUG-VM-13:/oracle/app/product/fmw
PolicyStoreSetup/lib11115/jps-se.jar
PolicyStoreSetup/lib11115/dms.jar
PolicyStoreSetup/lib11115/wsm-policy-core.jar
PolicyStoreSetup/PolicyStoreSetup.jar
PolicyStoreSetup/PolicyStoreSetup.zip
PolicyStoreSetup/refreshPolicyStoreFromLatestApplicationDataMap.sh
PolicyStoreSetup/UtilityConfig/
PolicyStoreSetup/UtilityConfig/DBConnectionFactory.properties
PolicyStoreSetup/UtilityConfig/flx_sm_res_attr_b.csv
PolicyStoreSetup/UtilityConfig/flx_md_menu_attr_b.csv
PolicyStoreSetup/UtilityConfig/pages.csv
PolicyStoreSetup/UtilityConfig/oracleflexcube.ldap
PolicyStoreSetup/UtilityConfig/UIComponents.csv
PolicyStoreSetup/UtilityConfig/FactoryShippedAccessPolicyRules.csv
PolicyStoreSetup/UtilityConfig/PolicyStoreSetup.properties
PolicyStoreSetup/UtilityConfig/logging.xml
PolicyStoreSetup/UtilityConfig/FactoryShippedMatrixAuthRules.csv
PolicyStoreSetup/UtilityConfig/ApplicationDataMap.csv
PolicyStoreSetup/UtilityConfig/flx_sm_attr_b.csv
PolicyStoreSetup/UtilityConfig/revokeResources.csv
PolicyStoreSetup/UtilityConfig/CreateResources.csv
PolicyStoreSetup/UtilityConfig/oracleflexcube.csv
./oracle/app/product/fmw/oracle_common/modules/oracle.jdbc_11.1.1/objdb6dms.jar:/oracle/app/product/fmw/obpinstall/obp/config:/oracle/app/product/fmw/obpinstall/obp/config/security/oaam:/Oracle/app/product/fmw/patch_wls1035/profiles/default/sys_manifest_classpath/weblogic_patch.jar:/oracle/app/product/fmw/patch_ocp960/profiles/default/sys_manifest_classpath/weblogic_patch.jar:/oracle/app/product/oracle_jrockit_jdk1.6.0_31_R26-2.3/lib/tools.jar:/oracle/app/product/fmw/wlsrver_10.3/serve/lib/weblogic_ep.jar:/oracle/app/product/fmw/wlsrver_10.3/serve/lib/weblogic.jar:/oracle/app/product/fmw/modules/features/weblogic_server.modules_10.3.5.0.jar:/oracle/app/product/fmw/wlsrver_10.3/serve/lib/weblogic.jar:/oracle/app/product/fmw/modules/org.apache.ant_1.7.1/lib/ant-all.jar:/oracle/app/product/fmw/modules/net.sf.antcontrib_1.1.0.0_1-0b2/lib/ant-contrib.jar:/oracle/app/product/fmw/oracle_common/soa/modules/commons-cl1-1.1.jar:/oracle/app/product/fmw/oracle_common/soa/modules/oracle.soa.mgmt_11.1.1/soa-infra-mgmt.jar:/oracle/app/product/fmw/oracle_common/modules/oracle.jrf_11.1.1/jrf.jar:/oracle/app/product/fmw/wlsrver_10.3/common/derby/lib/derbyclient.jar:/oracle/app/product/fmw/wlsrver_10.3/serve/lib/txql.jar:/oracle/app/product/fmw/wlsrver_10.3/serve/lib/weblogic.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/adf-controller-security.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/adf-share-security.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/adf-share-support.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/oa-bea-core-weblogic.security_1.0.0.0_5-2-0-0.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/dms.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/fmw_audit.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/identitystore.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/identitydirectory.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/identityutils.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/jacc-spi.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/javex.security.jacc_1.0.0.0_1-1.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/jps-api.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/jps-az-api.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/jps-az-common.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/jps-az-management.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/jps-az-rt.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/jps-az-sspi.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/jps-az-thirdparty.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/jps-common.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/jps-ee.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/jps-internal.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/jps-jboss-deployer.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/jps-jboss.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/jps-manifest.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/jps-means.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/jps-patching.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/jps-upgrade.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/jps-was-principals.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/jps-was.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/jps-wls-trustprovider.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/jps-wls.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/jsf-api.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/ldapclnt11.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/oracle.security.jps.was.deployment.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/oraclepleki.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/org.jaxen_1.1.1.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/osdt_cert.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/osdt_core.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/osdt_saml.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/osdt_saml2.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/osdt_wsa.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/osdt_ws_x.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/osdt_xmlsec.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/objdb6c66.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/lib11114/objd1.jar:/oracle/app/product/fmw/target/PolicyStoreSetup/PolicyStoreSetup.jar
Start Time : Dec 20, 2012 12:24:05 PM

Application Policy=OBP with policy domain =OBP will be created.

Do you want to continue?(y/n)

```

### 3.1.4 Front End Processing Interface (FEPI) Installation Steps

Following are the basic steps for FEPI installation procedure:

#### Step 1 Installation

The installer will create a directory structure for FEPI as  
/scratch/app/product/fmw/obpinstall/obp/fepi

1. Change the paths in FEPI start scripts based on the environment.
2. Modify Start\_fepi\_atm.sh and Start\_fepi\_pos.sh located at /scratch/app/product/fmw/obpinstall/obp/fepi/scripts.
3. Change the property values in channels\_atm.properties and channels\_pos.properties based on the environment as follows:

Property	Description	Example
BANK_CODE	Indicates the bank code	BANK_CODE=335
LISTENER_PORT	The port number on which FEPI server accepts incoming ISO message requests	LISTENER_PORT=9999



Property	Description	Example
COMMAND_PORT	The port number on which FEPI server accepts command message  Note: Need to specify an available valid port number, so that FEPI starts; it is a feature of native code and currently no messages are sent.	COMMAND_PORT=9998
ISO_TRACE_FILE_AREA	The location for ATM Trace logs	ISO_TRACE_FILE_AREA=/scratch/app/product/fmw/obpinstall/obp/fepi/logs/ATMTRACE
FNDI.FJ.java.naming.provider.url	The IP address and port number on which WebLogic accepts requests	FNDI.FJ.java.naming.provider.url=t3://10.180.9.108:7001

4. Start ATM and POS FEPI.
5. On prompt enter WebLogic login credentials. For example, \$ sh start\_fepi\_atm.sh.

### Step 2 ATM and POS Trace logs

The Trace logs are available in the logs folder. For example, the trace logs can be located at /oracle/deployables/iut2/fepi/logs.

Additionally, fepi-console and fepi-ofss logs are also stored at the above location for ATM and POS FEPI server.

### Step 3 module.channel or cz.module.channel enabling of logs

This is not related to FEPI, and these logs (host logs) are controlled by logging.xml of the WebLogic server. To understand the logging mechanism, see the OEM Diagnosability details at [http://docs.oracle.com/cd/E25054\\_01/doc.1111/e24473/diagnosability\\_adminuser.htm](http://docs.oracle.com/cd/E25054_01/doc.1111/e24473/diagnosability_adminuser.htm).

### Step 4 Multiple Instances

Currently there are two instances of FEPI which are ATM and POS. Each instance has the following set of individual files along with the common shared files. For example, for the ATM FEPI server, the files are as follows:

File Name	Description
channels_atm.properties	Configuration file
fepi_atm.logging.xml	Logging configuration file
start_fepi_atm.sh	Start script
stop_fepi_atm.sh	Stop script

## 3.2 Post Installation Configuration

This section describes the post installation configuration procedure for Oracle Banking Platform Host Media Pack. This can be started after the UI Post installation.

### Checklist for Post Installation Procedure

Before proceeding with the post installation procedure for the host, ensure the following:

- UI post installation has been done.

- Node manager is not running and no other process is running on NODE\_MGR\_PORT.
- OID domain given in obppostinstallhost.properties must exist (It is actually created in HOST pre-install).
- Host db schema seeding has been done.
- The node manager port should be free. You can verify this using the following command, where 5556 is the Node Manager Port.

```
$netstat -na | grep 5556
```

### Post Installation Configuration

1. Start the domain admin WebLogic server by executing the startWebLogic.sh script in the host domain directory.


```
cd <middleware home>
```

```
cd user_projects/domains/obphostdomain
```

```
./startWebLogic.sh
```

2. Enter the username and the password to ensure that the WebLogic server starts up.

**Figure 3–6 Host Domain Admin Server Credentials**



```
<Dec 3, 2011 6:59:53 PM GMT+05:30> <Info> <Security> <BEA-090065> <Getting boot identity from user.>
Enter username to boot WebLogic server:weblogic
Enter password to boot WebLogic server:█
```

3. Once the server status changes to RUNNING, proceed to execute the post installation script for Host domain located under middleware. This script performs a multitude of configurations such as:
  - Making changes in Oracle Banking Platform config properties to point to the appropriate integration server (Example: Setting the BIP server URL)
  - Setting the security realm properties of WebLogic domain and reassociating the same to the OID
  - Trust configuration setup using the trust keys copied from the UI domain

---

**Note:** Ensure that Oracle IPM application is running as during post install of Oracle Banking Platform host. There is a call to the same for creating Oracle Banking Platform content applications.

---

4. Navigate to the middleware home and list the files in the directory. A post installation and configuration script named obp-host-post-install.sh will be listed along with other files and directories.
5. Execute the script using the following command:
 

```
./obp-host-post-install.sh
```
6. For monitoring the script run, check the following log files created under the UI domain directory:
  - obp-host-install-log.txt

- obp-host-install-log-py.txt

---

---

**Note:** The output shown here is a sample output and may vary slightly from the original output.

---

---

**Figure 3–7 Host Domain Post Installation Script Execution**



**Figure 3–8 Host Domain Post Installation Script Execution Summary**

```

oracle@OFSMUG-VM-05/oracle/app/product/fmw
SOA_FURGING_OUTBOUND_PASSWORD : weblogic1
SOA_OUTBOUND_USERNAME          : soaweblogic
SOA_OUTBOUND_PASSWORD          : weblogic1
AMUSER_OUTBOUND_USERNAME       : atmuserweblogic
AMUSER_OUTBOUND_PASSWORD       : weblogic1
POSUSER_OUTBOUND_USERNAME      : posuserweblogic
POSUSER_OUTBOUND_PASSWORD      : weblogic1
DMSHOST_OUTBOUND_USERNAME      : dmshostweblogic
DMSHOST_OUTBOUND_PASSWORD      : weblogic1
DMSUI_OUTBOUND_USERNAME        : dmsuiweblogic
DMSUI_OUTBOUND_PASSWORD        : weblogic1
KEYSTORE_PASSWORD              : welcome1
UCM_READ_FROM_URL               : true
UCM_IP                           : ofss.ucm.com
UCM_PORT                         : 4444

Please take your time and go through the information printed above in detail.
If the above mentioned information is correct, please enter Y or y to proceed. Press any other key to exit the installation.
y
Post-installation will begin in sometime...

#####
This computer including any devices attached to this computer and the
information systems accessed from this point contain information that is
confidential.

Your activities and use of these facilities are monitored.
Your use of (and related activities in connection with) these facilities is
recorded and may be reviewed at any time.

For Support You may Contact,
Infrastructure Team
#####

oracle@10.180.25.23's password:
orakey.crt
orakey.crt copied from UI domain to /oracle/app/product/fmw/user_projects/domains/host_domain/config/fmwconfig      100% 457    0.5KB/s   00:00
BIP_SERVICE_ENDPOINT as http://10.180.9.73:9704/xmlpserver/services/PublicReportService?wsl
IPM_URL as http://10.180.9.97:16000/imaging/ws
JDBC String as jdbc:oracle:thin:@10.180.22.245:1521:DEVDB
loc /oracle/app/product/fmw/obpininstall/obp/ipmscripts/imaging-client.jar
java.lang.RuntimeException: Factory class constructor not found
    at oracle.imaging.ServicesFactory.createFactory(ServicesFactory.java:410)
    at oracle.imaging.ServicesFactory.login(ServicesFactory.java:374)
    at com.ofss.fc.utils.content.ContentDeploymentUtility.setupUCMConnection(ContentDeploymentUtility.java:344)
    at com.ofss.fc.utils.content.ContentDeploymentUtility.main(ContentDeploymentUtility.java:99)
Owner: CN=orakey, O="oracle C=us"
Issuer: CN=orakey, O="oracle C=us"
Serial number: 50d2b256
Valid from: Thu Dec 20 12:08:14 IST 2012 until: Wed Mar 20 12:08:14 IST 2013
Certificate fingerprints:
    MD5: D5:EB:2A:61:6D:0B:1A:5D:EF:20:72:B2:C9:13:8B:D8
    SHA1: F2:2D:EA:84:7F:A0:A4:C6:E7:CS:D1:C1:0A:DF:86:B8:38:26:FC:8C
    Signature algorithm name: SHA1withRSA
    Version: 3
Trust this certificate? [no]: yes
Certificate was added to keystore
Logging WLS stderr to /oracle/app/product/fmw/user_projects/domains/host_domain/servers/AdminServer/stderr.log
Verifying setDomainEnv , checking OBP_ORACLE_HOME as
/oracle/app/product/fmw/obpininstall/obp

```

After completion of the host post installation, it will return to the command prompt. Then start the admin and managed servers to check the domain configuration status as described in verification part in [Section 11.2, "Host Domain Verification."](#)





---

# Oracle Banking Platform Presentation Media Pack Installation

This chapter details every step involved in the installation of Oracle Banking Platform Presentation (UI) Media pack. The subsequent section refers to the variable names specified in [Section 2.3, "Installation Checklists"](#).

## 4.1 Installation and Configuration Procedure

This section details the installation procedure for the Oracle Banking Platform Presentation Media Pack.

### 4.1.1 Preparatory Steps

This section lists the preparatory steps required for the Oracle Banking Platform Presentation Media Pack installation.

#### Step 1 Procuring Installables

Download the appropriate presentation media pack from the following location:

<http://edelivery.oracle.com/>

#### Step 2 Extracting the Installables

Copy the 'ui.zip' to a local Linux VM or Linux machine from where the installation will be carried out. Extract the 'ui.zip'. Three files will be extracted:

- A zip file 'obpinstall-ui.zip'
- The installation script 'installobpui.sh'
- The install configuration property file 'installobpui.properties'

#### Step 3 Printing Checklists

Take a printout of the installation checklist mentioned in [Section 2.3, "Installation Checklists"](#) of this document and note the values applicable for each point in the last column for 'Value' so that the same is handy during the actual installation.

### 4.1.2 Pre-Installation Steps

This section lists the pre-installation steps required for the Oracle Banking Platform Presentation Media Pack installation.

### **Step 1 Updating installobpui.properties**

Navigate to the directory where the files obpinstall-ui.zip, installobpui.sh and installobpui.properties are placed and update installobpui.properties with relevant values from the checklist.

### **Step 2 Checklist for a new setup**


Before initiating installation on a completely new setup, check the following:

- Node manager must not be running on the target machine.
- Create a dummy folder named as Target and mention its path against HOST\_TARGET property.
- In case of a re-installation ensure that the directory paths against DOMAIN\_DIRECTORY\_LOCATION, OES\_MW\_HOME, HOST\_TARGET and HOST\_MW\_HOME specified in installobpui.properties are cleaned up for traces of any previous installations, as the remote shell copy may not be overwriting in case of any residual file left by the previous run.
- No processes should be running on the ports in HOST and OES machine given in installobpui.properties.
- MDS\_SCHEMA\_USER schema given in the installobpui.properties exists. This should point to the same schema as MDS\_HOST\_DB\_USER of installobphost.properties.
- Values given in installobpui.properties must be correct. At run time, no option will be given to change the values.

## **4.1.3 Installation Steps**

This section lists the installation steps required for the Oracle Banking Platform Presentation Media Pack installation.

1. Navigate to the directory where the media pack files are placed and execute installobpui.sh. The installation script shall echo the values entered in the installobpui.properties file and ask for a confirmation to go ahead with the installation.
2. The installation script automatically triggers the following significant steps using secure remote copy 'scp' command and remote shell commands execution using the 'ssh' command.

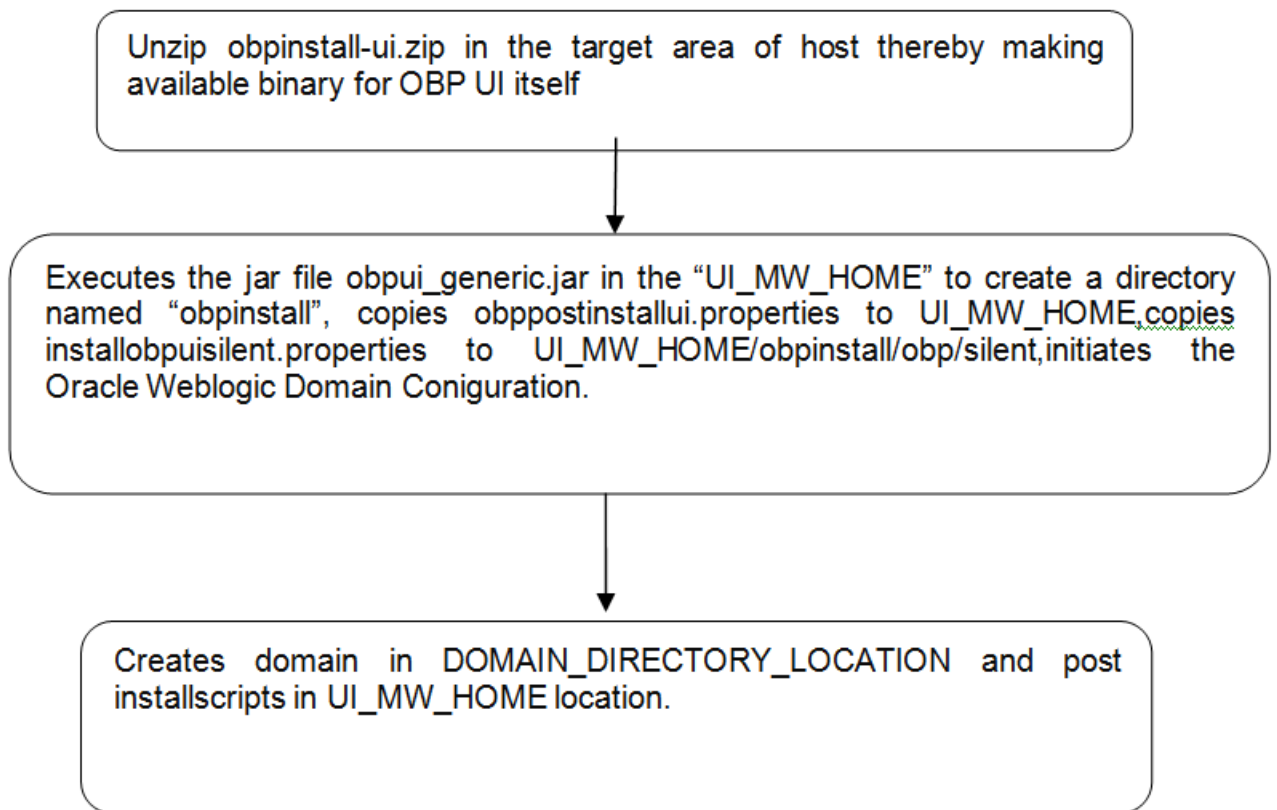**Figure 4-1 Steps in `installobpui.sh` script**

A sample output is given here.

**Figure 4–2 Confirmation to Proceed Domain Installation**

```

[ofsobp@ofss3131507 oui-ui]$ ./installobpui.sh
The present working directory is /scratch/install/oui-ui. It is assumed that all installables are present in this directory.
Printing the installation details:-
SILENT_INSTALL           : y
LOCAL_IP                 : 10.180.91.52
LOCAL_DISPLAY_VALUE     : 0.0
DOMAIN_NAME              : ui_domain
DOMAIN_DIRECTORY_LOCATION : /scratch/app/product/fmw/user_projects/domains
WEBLOGIC_USERNAME       : weblogic
WEBLOGIC_PASSWORD       : weblogic1
MDS_SCHEMA_USER         : HOSTUI_MDS
MDS_SCHEMA_PASSWORD     : welcome1
MDS_DB_IP               : 10.180.85.42
MDS_DB_PORT             : 1521
MDS_DB_SERVICE_NAME     : ORA8542
HOST_SCHEMA_USER        : TEST1_OBP_HOST
HOST_SCHEMA_PASSWORD    : welcome1
HOST_DB_IP              : 10.180.85.42
HOST_DB_PORT            : 1521
HOST_DB_SERVICE_NAME    : ORA8542
OES_SCHEMA_USER         : HOSTUI_MDS
OES_SCHEMA_PASSWORD     : welcome1
OES_DB_IP              : 10.180.85.42
OES_DB_PORT            : 1521
OES_DB_SERVICE_NAME     : ORA8542
ADMIN_SERVER_LISTEN_ADDRESS : 10.180.85.40
ADMIN_SERVER_LISTEN_PORT  : 7001
ADMIN_SERVER_SSL_LISTEN_PORT : 7002
MANAGED_SERVER_LISTEN_ADDRESS : 10.180.85.40
MANAGED_SERVER_LISTEN_PORT  : 8001
MANAGED_SERVER_SSL_LISTEN_PORT : 8002
POLICY_SEEDING_TYPE      : LDAP
LDAP_PROVIDER            : OID
OID_IP                   : 10.180.85.42
OID_PORT                 : 3060
OID_ADMIN_USER           : cn=orcladmin
OID_ADMIN_PWD            : welcome1
OID_DOMAIN_NAME          : ouidomain
OID_DOMAIN_PORT          : 7005
OID_GROUP_DSN            : cn=Groups,dc=in,dc=oracle,dc=com
OID_USER_DSN             : cn=Users,dc=in,dc=oracle,dc=com
JFS_CONTEXT_DSN          : jpsroot
NOBE_MGR_PORT            : 5556
OES_IP                   : 10.180.2.188
OES_MW_HOME              : /scratch/app/product/fmw
OES_DOMAIN_NAME          : oesDomain
OES_UNIX_USER            : ofsobp
UI_IP                    : 10.180.85.40
UI_HOST_NAME             : ofss3131507
UI_TARGET                : /scratch/app/product/fmw/target
UI_MW_HOME               : /scratch/app/product/fmw
UI_JAVA_HOME              : /scratch/app/product/jrockit-jdk1.6.0_51
OUI_JAVA_HOME             : /usr/lib/jvm/java-1.7.0-openjdk-1.7.0.9.x86_64
CENTRAL_INVENTORY_LOC   : /scratch/app/product/fmw/obpininstall/inventory
INSTALL_AS               : ofsobp
IPM_SERVER_IP            : 10.180.9.97
IPM_SERVER_PORT          : 16000
OFSAA_SERVER_IP          : ofsa-ofs.com
OFSAA_SERVER_PORT        : 17000
OAMM_SERVER_IP           : oam-ofs.com

```

3. Verify the value of each property carefully before proceeding.
4. If all values are correct, then enter 'Y' or 'y' and press Enter to initiate the installation. The installation utility performs the installation and domain is created silently.

Figure 4-3 Copying and Extraction of obpininstall-ui.zip

```

OID_ADMIN_PWD           : welcome1
OID_DOMAIN_NAME        : ouidomain
OID_DOMAIN_PORT        : 7005
OID_GROUP_DSN          : cn=Groups,dc=in,dc=oracle,dc=com
OID_USER_DSN           : cn=Users,dc=in,dc=oracle,dc=com
JPS_CONTEXT_DSN        : jpsroot
NODE_MGR_PORT          : 5556
OES_IP                  : 10.180.2.188
OES_MW_HOME            : /scratch/app/product/fmw
OES_DOMAIN_NAME        : oesDomain
OES_UNIX_USER          : ofssobp
UI_IP                   : 10.180.85.40
UI_HOST_NAME           : ofss9131307
UI_TARGET              : /scratch/app/product/fmw/target
UI_MW_HOME             : /scratch/app/product/fmw
UI_JAVA_HOME           : /scratch/app/product/jrockit-jdk1.6.0_51
OUI_JAVA_HOME          : /usr/lib/jvm/java-1.7.0-openjdk-1.7.0.9.x86_64
CENTRAL_INVENTORY_LOC : /scratch/app/product/fmw/obpininstall/inventory
INSTALL_AS             : ofssobp
IPM_SERVER_IP          : 10.180.9.97
IPM_SERVER_PORT        : 16000
OFSM_SERVER_IP         : ofssas-ofss.com
OFSM_SERVER_PORT      : 17000
OAMM_SERVER_IP        : oam-ofss.com
OAMM_SERVER_PORT      : 14000
OIM_SERVER_IP         : oim-ofss.com
OIM_SERVER_PORT       : 16000
UI_ADMIN_JVM_PARAMS   : -Xms512m -Xmx1024m -XXnoSystemGC
UI_MANAGED_JVM_PARAMS : -Djbo.ampool.doampooling=false -XXaggressive -Xms4096m -Xmx4096m -Xgc:pausetime -XXnoSystemGC -XX:-FlightRecorder -Djbo
ckit.codegen.newlockmatching=true -Djbo.load.components.lazily=true -XX:-FlightRecorder
HOST_ADMIN_SERVER_LISTEN_ADDRESS : 10.180.85.39
HOST_ADMIN_SERVER_LISTEN_PORT   : 7001
HOST_MANAGED_SERVER_LISTEN_ADDRESS : 10.180.85.39
HOST_MANAGED_SERVER_LISTEN_PORT   : 8001
SOA_MANAGED_SERVER_LISTEN_ADDRESS : 10.180.85.41
SOA_MANAGED_SERVER_LISTEN_PORT   : 8001
KEYSTORE_PASSWORD               : welcome1
UI_SSL_PASSWORD                  : welcome1
UCH_READ_FROM_URL                : true
UCH_IP                            : ofss.uch.com
UCH_PORT                          : 4444
OFFLINE_CHANNEL_OUTBOUND_USERNAME : offlineuser
OFFLINE_CHANNEL_OUTBOUND_PASSWORD : offlinepassword
CARD_USERNAME                     : orakey
CARD_PASSWORD                     : welcome1
RULE_USERNAME                     : orakey
RULE_PASSWORD                     : welcome1
USER_TIMEZONE                     : +S:30

Please take your time and go through the information printed above in detail.
If the above mentioned information is correct, please enter Y or y to proceed. Press any other key to exit the installation.
y
Installation will begin in sometime.
Please wait while the installables are copied onto the servers.
ofssobp@10.180.85.40's password:
obpininstall-ui.zip                                     100% 390MB 194.9MB/s 00:02
obpostinstallui.properties                             100% 1904 1.9KB/s 00:00
installobpininstall.properties                         100% 862 0.8KB/s 00:00
The configuration of OBE UI domain will begin immediately.
ofssobp@10.180.85.40's password:

```







Figure 4–6 UI Admin Server Running

```

oracle@OFSMUG-VM-13/oracle/app/product/fmw/user_projects/domains/ui_domain
KeyUsage [
  Key_CertSign
]
]
Algorithm: [MD5withRSA]
Signature:
0000: 9D 26 4C 29 C8 91 C3 A7 06 C3 24 6F AE B4 F8 82 .6L).....So....
0010: 80 4D AA CB 7C 79 46 84 81 C4 66 95 F4 1E D8 C4 .M...VF...f....
0020: E9 B7 D9 7C E2 23 3A A4 B7 21 E0 AA 54 2B 4A FF .....#3...!T+J.
0030: CB 21 20 88 81 21 DB AC 90 54 D8 7D 79 63 23 3C .! ...!...T..yc#<

] The system is vulnerable to security attacks, since it trusts certificates signed by the demo trusted CA.>
<Dec 6, 2012 10:16:39 AM IST> <Notice> <Security> <BEA-090898> <Ignoring the trusted CA certificate "CN=Entrust Root Certification Authority - G2,OU=(c) 2009 Entrust, Inc. - For authorized use only,OU=See www.entrust.net/legal-terms,OU=Entrust, Inc.,C=US". The loading of the trusted certificate list raised a certificate parsing exception PKIX: Unsupported OID in the AlgorithmIdentifier object: 1.2.840.113549.1.1.11.>
<Dec 6, 2012 10:16:39 AM IST> <Notice> <Security> <BEA-090898> <Ignoring the trusted CA certificate "CN=thawte Primary Root CA - G3,OU=(c) 2008 thawte, Inc. - For authorized use only,OU=Certification Services Division,O=thawte, Inc.,C=US". The loading of the trusted certificate list raised a certificate parsing exception PKIX: Unsupported OID in the AlgorithmIdentifier object: 1.2.840.113549.1.1.11.>
<Dec 6, 2012 10:16:39 AM IST> <Notice> <Security> <BEA-090898> <Ignoring the trusted CA certificate "CN=T-TeleSec GlobalRoot Class 3,OU=T-Systems Trust Center,O=T-Systems Enterprise Services GmbH,C=DE". The loading of the trusted certificate list raised a certificate parsing exception PKIX: Unsupported OID in the AlgorithmIdentifier object: 1.2.840.113549.1.1.11.>
<Dec 6, 2012 10:16:39 AM IST> <Notice> <Security> <BEA-090898> <Ignoring the trusted CA certificate "CN=T-TeleSec GlobalRoot Class 2,OU=T-Systems Trust Center,O=T-Systems Enterprise Services GmbH,C=DE". The loading of the trusted certificate list raised a certificate parsing exception PKIX: Unsupported OID in the AlgorithmIdentifier object: 1.2.840.113549.1.1.11.>
<Dec 6, 2012 10:16:39 AM IST> <Notice> <Security> <BEA-090898> <Ignoring the trusted CA certificate "CN=GlobalSign,O=GlobalSign,OU=GlobalSign Root CA - R3". The loading of the trusted certificate list raised a certificate parsing exception PKIX: Unsupported OID in the AlgorithmIdentifier object: 1.2.840.113549.1.1.11.>
<Dec 6, 2012 10:16:39 AM IST> <Notice> <Security> <BEA-090898> <Ignoring the trusted CA certificate "OU=Security Communication RootCA2,O=SECOM Trust Systems CO.,LTD.,C=JP". The loading of the trusted certificate list raised a certificate parsing exception PKIX: Unsupported OID in the AlgorithmIdentifier object: 1.2.840.113549.1.1.11.>
<Dec 6, 2012 10:16:39 AM IST> <Notice> <Security> <BEA-090898> <Ignoring the trusted CA certificate "CN=VeriSign Universal Root Certification Authority,OU=(c) 2008 VeriSign, Inc. - For authorized use only,OU=VeriSign Trust Network,O=VeriSign, Inc.,C=US". The loading of the trusted certificate list raised a certificate parsing exception PKIX: Unsupported OID in the AlgorithmIdentifier object: 1.2.840.113549.1.1.11.>
<Dec 6, 2012 10:16:39 AM IST> <Notice> <Security> <BEA-090898> <Ignoring the trusted CA certificate "CN=KEYNECTIS ROOT CA,OU=ROOT,O=KEYNECTIS,C=FR". The loading of the trusted certificate list raised a certificate parsing exception PKIX: Unsupported OID in the AlgorithmIdentifier object: 1.2.840.113549.1.1.11.>
<Dec 6, 2012 10:16:39 AM IST> <Notice> <Security> <BEA-090898> <Ignoring the trusted CA certificate "CN=GeoTrust Primary Certification Authority - G3,OU=(c) 2008 GeoTrust Inc. - For authorized use only,O=GeoTrust Inc.,C=US". The loading of the trusted certificate list raised a certificate parsing exception PKIX: Unsupported OID in the AlgorithmIdentifier object: 1.2.840.113549.1.1.11.>
<Dec 6, 2012 10:16:39 AM IST> <Notice> <Server> <BEA-002613> <Channel "DefaultSecure[2]" is now listening on 127.0.0.1:7002 for protocols iiops, t3s, ldaps, https.>
<Dec 6, 2012 10:16:39 AM IST> <Notice> <Server> <BEA-002613> <Channel "DefaultSecure[3]" is now listening on 0:0:0:0:0:0:1:7002 for protocols iiops, t3s, ldaps, https.>
<Dec 6, 2012 10:16:39 AM IST> <Notice> <Server> <BEA-002613> <Channel "Default[3]" is now listening on 0:0:0:0:0:0:1:7001 for protocols iiop, t3, ldaps, snmp, http.>
<Dec 6, 2012 10:16:39 AM IST> <Notice> <Server> <BEA-002613> <Channel "Default[1]" is now listening on fe80:0:0:0:216:3eff:fe35:67a4:7001 for protocols iiop, t3, ldaps, snmp, http.>
<Dec 6, 2012 10:16:39 AM IST> <Notice> <Server> <BEA-002613> <Channel "DefaultSecure" is now listening on 10.180.25.23:7002 for protocols iiops, t3s, ldaps, https.>
<Dec 6, 2012 10:16:39 AM IST> <Notice> <Server> <BEA-002613> <Channel "DefaultSecure[1]" is now listening on fe80:0:0:0:216:3eff:fe35:67a4:7002 for protocols iiops, t3s, ldaps, https.>
<Dec 6, 2012 10:16:39 AM IST> <Notice> <Server> <BEA-002613> <Channel "Default[2]" is now listening on 127.0.0.1:7001 for protocols iiop, t3, ldaps, snmp, http.>
<Dec 6, 2012 10:16:39 AM IST> <Notice> <Server> <BEA-002613> <Channel "Default" is now listening on 10.180.25.23:7001 for protocols iiop, t3, ldaps, snmp, http.>
<Dec 6, 2012 10:16:39 AM IST> <Notice> <WebLogicServer> <BEA-000329> <Started WebLogic Admin Server "AdminServer" for domain "ui_domain" running in Production Mode>
<Dec 6, 2012 10:16:39 AM IST> <Notice> <WebLogicServer> <BEA-000365> <Server state changed to RUNNING>
<Dec 6, 2012 10:16:39 AM IST> <Notice> <WebLogicServer> <BEA-000360> <Server started in RUNNING mode>

```

3. Once the server status changes to RUNNING proceed to execute the post installation script.
4. Navigate to the middleware home and list the files in the directory. A post installation and configuration script named obp-ui-post-install.sh will be listed along with other files and directories.
5. Navigate to the UI middleware location and give executable permission to the post install script:
 

```
$cd <ui middleware home>
```
6. Execute the script using the following commands:
 

```
$. /obp-ui-post-install.sh
```



Figure 4-7 UI Post Install Script Confirm

```

DOMAIN_DIRECTORY_LOCATION      : /scratch/app/product/fmw/user_projects/domains
ADMIN_SERVER_LISTEN_ADDRESS    : 10.180.85.40
ADMIN_SERVER_LISTEN_PORT      : 7001
MANAGED_SERVER_LISTEN_ADDRESS  : 10.180.85.40
MANAGED_SERVER_LISTEN_PORT    : 8001
WEBLOGIC_USERNAME              : weblogic
WEBLOGIC_PASSWORD              : weblogic1
UI_ADMIN_JVM_PARAMS            : -Xms512m -Xmx1024m -XXnoSystemGC
UI_MANAGED_JVM_PARAMS          : -Djbo.ampool.doampooling=false -XXaggressive -Xms4096m -Xmx4096m -Xgc:pausetime -XXnoSystemGC -XX:-FlightRecorder -Dpro
okit.codegen.newlockmatching=true -Djbo.load.components.lazily=true -XX:-FlightRecorder
UI_IP                           : 10.180.85.40
UI_HOST_NAME                    : ofssa131507
UI_TARGET                       : /scratch/app/product/fmw/target
UI_MW_HOME                     : /scratch/app/product/fmw
KEYSTORE_PASSWORD              : welcome1
UI_SSL_PASSWORD                 : welcome1
INSTALL_AS                      : ofssobp
HOST_ADMIN_SERVER_LISTEN_ADDRESS : 10.180.85.39
HOST_ADMIN_SERVER_LISTEN_PORT  : 7001
HOST_MANAGED_SERVER_LISTEN_ADDRESS : 10.180.85.39
HOST_MANAGED_SERVER_LISTEN_PORT : 8001
SOA_MANAGED_SERVER_LISTEN_ADDRESS : 10.180.85.41
SOA_MANAGED_SERVER_LISTEN_PORT  : 8001
POLICY_SEEDING_TYPE            : LDAP
LDAP_PROVIDER                   : OID
OID_IP                           : 10.180.85.42
OID_PORT                        : 3060
OID_ADMIN_USER                  : cn=orcladmin
OID_ADMIN_PWD                   : welcome1
OID_DOMAIN_NAME                 : ouidomain
OID_DOMAIN_PORT                 : 7005
OID_GROUP_DSN                   : cn=Groups,dc=in,dc=oracle,dc=com
OID_USER_DSN                    : cn=Users,dc=in,dc=oracle,dc=com
JPS_CONTEXT_DSN                 : jpsroot
NODE_MGR_PORT                   : 5556
OES_IP                           : 10.180.2.188
OES_MW_HOME                     : /scratch/app/product/fmw
OES_DOMAIN_NAME                 : oesDomain
OES_UNIX_USER                   : ofssobp
IPM_SERVER_IP                   : 10.180.9.97
IPM_SERVER_PORT                 : 16000
OFSAA_SERVER_IP                 : ofsaa-ofss.com
OFSAA_SERVER_PORT               : 17000
OAMM_SERVER_IP                  : oamm-ofss.com
OAMM_SERVER_PORT                : 14000
OIM_SERVER_IP                   : oim-ofss.com
OIM_SERVER_PORT                 : 16000
UCM_READ_FROM_URL               : true
UCM_IP                           : ofss-ucm.com
UCM_PORT                         : 4444
OFFLINE_CHANNEL_OUTBOUND_USERNAME : offlineuser
OFFLINE_CHANNEL_OUTBOUND_PASSWORD : offlinepassword
CARD_USERNAME                   : orakey
CARD_PASSWORD                   : welcome1
RULE_USERNAME                   : orakey
RULE_PASSWORD                   : welcome1
USER_TIMEZONE                   : +5:30
Please take your time and go through the information printed above in detail.
If the above mentioned information is correct, please enter Y or y to proceed. Press any other key to exit the installation.

```

**Figure 4–8 UI Post Install Script Running**

```

OFSAA_SERVER_PORT      : 17000
OAAM_SERVER_IP        : oaam-ofss.com
OAAM_SERVER_PORT      : 14000
OIM_SERVER_IP         : oim-ofss.com
OIM_SERVER_PORT       : 14000
UCM_READ_FROM_URL     : true
UCM_IP                : ofss-ucm.com
UCM_PORT              : 4444
OFFLINE_CHANNEL_OUTBOUND_USERNAME : offlineuser
OFFLINE_CHANNEL_OUTBOUND_PASSWORD : offlinepassword
CARD_USERNAME         : orakey
CARD_PASSWORD        : welcome1
RULE_USERNAME        : orakey
RULE_PASSWORD        : welcome1
USER_TIMEZONE        : +5:30

Please take your time and go through the information printed above in detail.
If the above mentioned information is correct, please enter Y or y to proceed. Press any other key to exit the installation.
y
Post-installation will begin in sometime...
Generating a self signed certificate with common name ofss3131507 and key strength 1024
<Jul 22, 2014 12:07:38 PM IST> <Info> <Security> <BEA-090905> <Disabling CryptoJ JCE Provider self-integrity check for better startup performance. To enable
this check, specify -Dweblogic.security.allowCryptoJDefaultJCEVerification=true>
<Jul 22, 2014 12:07:39 PM IST> <Info> <Security> <BEA-090906> <Changing the default Random Number Generator in RSA CryptoJ from ECDRBG to FIPS186PRNG. To dis
able this change, specify -Dweblogic.security.allowCryptoJDefaultPRNG=true>
<Jul 22, 2014 12:07:39 PM IST> <Info> <Security> <BEA-090908> <Using default WebLogic SSL Hostname Verifier implementation.>

Imported private key UI_SSL_SelfKey.key.pem and certificate UI_SSL_SelfCA.cer.pem
into a new keystore UI_SSL_IdentityStore.jks of type jks under alias UI_SSL_trustself
Enter keystore password:
Re-enter new password:
Owner: CN=ofss3131507, OU=FOR TESTING ONLY, O=MyOrganization, L=MyTown, ST=MyState, C=US
Issuer: CN=ofss3131507, OU=FOR TESTING ONLY, O=MyOrganization, L=MyTown, ST=MyState, C=US
Serial number: 73e9db7332da86af465df78e3bf22087
Valid from: Mon Jul 21 12:07:37 IST 2014 until: Sat Jul 22 12:07:37 IST 2014
Certificate fingerprints:
    MD5: 4C:E1:38:F6:DD:72:72:BD:99:92:5C:05:89:9C:71:B4
    SHA1: B1:67:05:D5:AA:11:35:E9:2F:91:33:0B:55:61:8E:75:26:B1:56:E1
Signature algorithm name: MD5withRSA
Version: 3

Extensions:

#1: ObjectId: 2.5.29.15 Criticality=true
KeyUsage [
    Key_CertSign
]

#2: ObjectId: 2.5.29.19 Criticality=true
BasicConstraints:[
    CA:true
    PathLen:1
]

Trust this certificate? [no]: yes
Certificate was added to keystore
Certificate stored in file <orakey.crt>
Logging WLS stderr to /scratch/app/product/fmw/user_projects/domains/ui_domain/servers/AdminServer/stderr.log
-----
/scratch/app/product/fmw/obpinstall/obp

```

7. For monitoring the script run check the following log files created under the ui domain directory,

- obp-ui-install-log.txt
- obp-ui-install-log-py.txt

---

# Oracle Banking Platform SOA Media Pack Installation

This chapter details every step involved in the installation of Oracle Banking Platform SOA (Integration Server) Media pack. The subsequent section refers to the variable names specified in [Section 2.3, "Installation Checklists"](#).

## 5.1 Installation and Configuration Procedure

This section details the installation procedure for the Oracle Banking Platform SOA Media Pack.

### 5.1.1 Preparatory Steps

This section lists the preparatory steps required for the Oracle Banking Platform SOA Media Pack installation.

#### Step 1 Procuring Installables

Download the appropriate SOA media pack from the following location:

<http://edelivery.oracle.com/>

#### Step 2 Extracting the Installables

Copy the 'soa.zip' to a local Linux VM or Linux machine from where the installation will be carried out. Extract the 'soa.zip'. Three files will be extracted:

- A zip file 'obpinstall-soa.zip'
- The installation script 'installobpsoa.sh'
- The install configuration property file 'installobpsoa.properties'

#### Step 3 Printing Checklists

Take a printout of the installation checklist mentioned in [Section 2.3, "Installation Checklists"](#) of this document and note the values applicable for each point in the last column for 'Value' so that the same is handy during the actual installation.

### 5.1.2 Pre-Installation Steps

This section lists the pre-installation steps required for the Oracle Banking Platform SOA Media Pack installation.

**Step 1 Updating installobpsoa.properties**

Navigate to the directory where the files obpinstall-soa.zip, installobpsoa.sh and installobpsoa.properties are placed and update installobpsoa.properties with relevant values from the checklist.

**Step 2 Checklist for a new setup**

Before initiating installation, check the following:

- Node manager must not be running on the target machine.
- Create a dummy folder named as target and mention its path against HOST\_TARGET property.
- All required database schema are to be created manually using RCU 11.1.1.7. The schema are as follows:
  - MDS\_SCHEMA\_USER
  - BAM\_SCHEMA\_USER
  - SOA\_INFRASTRUCTURE\_SCHEMA\_USER
  - USER\_MESSAGING\_SERVICE\_SCHEMA\_USER


Prefix for all these four schema should be same.

- Values given in installobpui.properties must be correct. At run time, no option is given to change the values.
- No processes should be running on the ports given in installobpsoa.properties.
- OID\_DOMAIN\_NAME in installobpsoa.properties must not exist in OID and must be different from OID\_DOMAIN\_NAME in installobpui.properties.
- In case of a re-installation ensure that the directory paths against SOA\_TARGET and SOA\_MW\_HOME specified in installobpsoa.properties are cleaned up for traces of any previous installations, as the remote shell copy may not be overwriting in case of any residual file left by the previous run.
- Before initiating the installation, ensure that all the values given in installobpsoa.properties are correct. At the time of installation, the values will only be displayed once for verification, and it will not be possible to change the values once the installation begins.

**5.1.3 Installation Steps**

This section lists the installation steps required for the Oracle Banking Platform SOA Media Pack installation.

1. Navigate to the directory where the media pack files are placed and execute installobpsoa.sh. The installation script shall echo the values entered in the installobpsoa.properties file and ask for a confirmation to go ahead with the installation.
2. The installation script automatically triggers the following significant steps using secure remote copy 'scp' command and remote shell commands execution using the 'ssh' command.

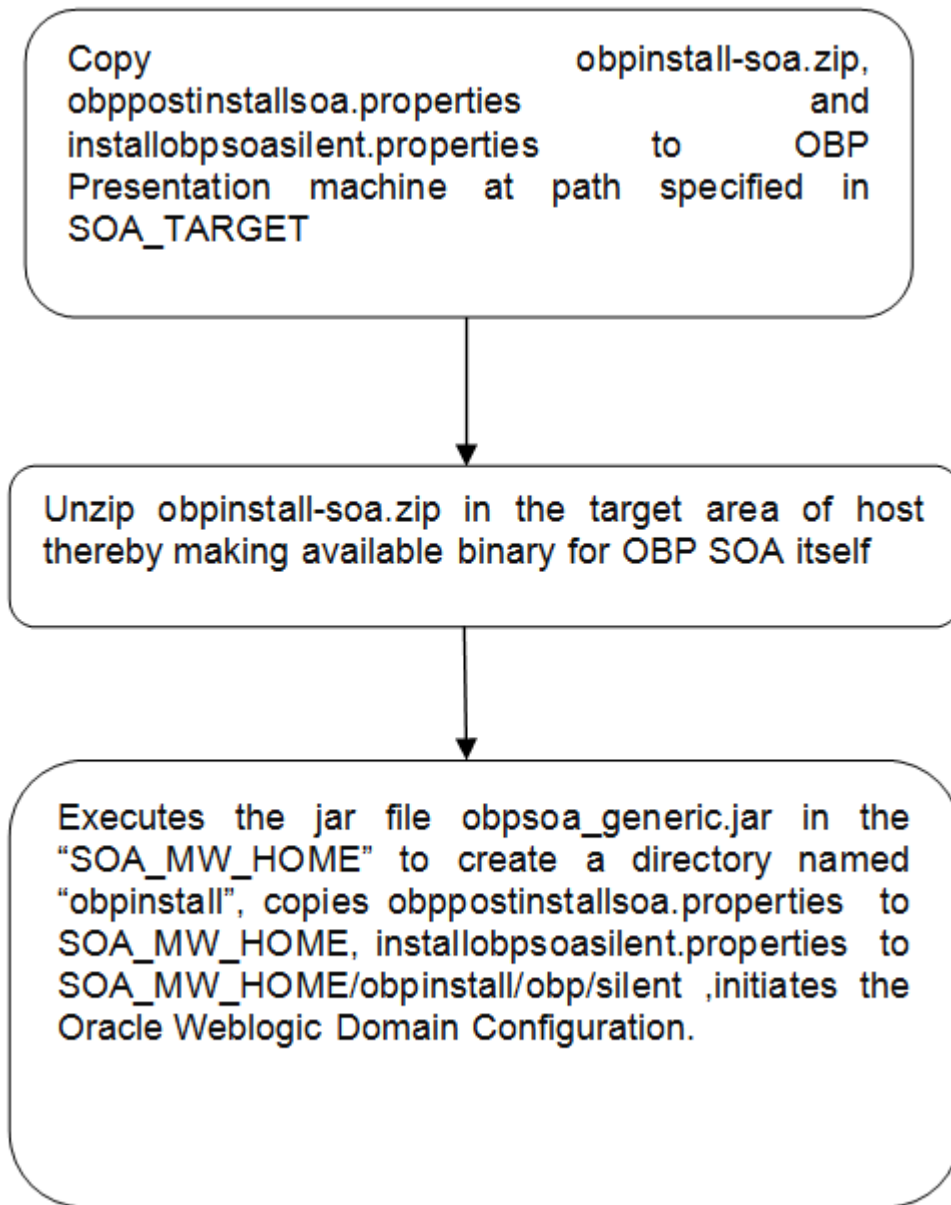**Figure 5-1 Steps in installobpsoa.sh script**

A sample output is given here.

**Figure 5–2 Confirmation to Proceed Domain Installation**

```

BAM_SERVER_LISTEN_ADDRESS      : 10.180.85.41
BAM_SERVER_LISTEN_PORT        : 9003
BAM_SERVER_SSL_LISTEN_PORT     : 9004
HOST_MANAGED_SERVER_LISTEN_ADDRESS : 10.180.85.39
HOST_MANAGED_SERVER_LISTEN_PORT  : 8001
POLICY_SEEDING_TYPE           : LDAP
LDAP_PROVIDER                  : OID
OID_IP                          : 10.180.85.42
OID_PORT                        : 3060
OID_ADMIN_USER                 : cn=orcladmin
OID_ADMIN_PWD                  : welcome1
OID_DOMAIN_NAME                : cui-soadomain
OID_DOMAIN_PORT                : 7005
OID_GROUP_DSN                  : cn=Groups,dc=in,dc=oracle,dc=com
OID_USER_DSN                   : cn=Users,dc=in,dc=oracle,dc=com
JPS_CONTEXT_DSN                : jpsroot
OES_SCHEMA_USER                : HOSTUI_MDS
OES_SCHEMA_PASSWORD            : welcome1
OES_DB_IP                      : 10.180.85.42
OES_DB_PORT                    : 1521
OES_DB_SERVICE_NAME            : OES42
OES_IP                          : 10.180.2.188
OES_MW_HOME                    : /scratch/app/product/emw
OES_DOMAIN_NAME                : oesDomain
OES_UNIX_USER                  : ofsaobp
NODE_MGR_PORT                  : 5556
SOA_IP                          : 10.180.85.41
SOA_HOME_PATH                  : /scratch/app/product/emw/Oracle_SOA1
SOA_TARGET                     : /scratch/app/product/emw/target
SOA_JAVA_HOME                  : /scratch/app/product/rocket-jdk1.6.0.51
OUI_JAVA_HOME                   : /usr/lib/jvm/java-1.7.0-openjdk-1.7.0.9.x86_64
CENTRAL_INVENTORY_LOC         : /scratch/app/product/emw/obpininstall/inventory
SOA_MW_HOME                    : /scratch/app/product/emw
UI_IP                          : 10.180.85.40
UI_UNIX_USER                   : ofsaobp
UI_DOMAIN_HOME                 : /scratch/app/product/emw/user_projects/domains/ui_domain
INSTALL_AS                     : ofsaobp
SOA_ADMIN JVM_PARAMS           : -Xms512m -Xmx1024m -Xgc:concn -XXnosystemgc
SOA_MANAGED JVM_PARAMS         : -Xms614m -Xmx614m -XXnosystemgc -Xms2048m -XX:-FlightRecorder -Xgc:pausetime
SOA_HUMAN_TASKSERVER JVM_PARAMS : -Djio.sampool.dampooling=false -Xms4096m -Xmx4096m -Xgc:pausetime -XX:-FlightRecorder -XXnosystemgc -Xms1024m -Dobp.h
http.staleCheckEnabled=false -Dobp.http.idleTimeoutPollInterval=10000 -Dobp.http.maxRetryCount=3 -Dobp.http.socketBufferSize=8192 -Dobp.http.maxConnectionsPer
Host=150 -Dobp.http.connectionTimeout=600000 -Dobp.http.expireAndRetry=false
KEYSTORE_PASSWORD              : welcome1
UCM_READ_FROM_URL              : true
UCM_IP                          : ofsa.ucm.com
UCM_PORT                       : 4444
UI_MANAGED_SERVER_LISTEN_ADDRESS : 10.180.85.40
UI_MANAGED_SERVER_LISTEN_PORT   : 8001
DEFAULT_BANK_CODE              : 49
DEFAULT_TRANSACTION_BRANCH_CODE : 8542
DEFAULT_TARGET_UNIT            : SUNCORP
CARD_USERNAME                   : orakey
CARD_PASSWORD                   : welcome1
RULE_USERNAME                  : orakey
RULE_PASSWORD                   : welcome1
USER_TIMEZONE                   : +S:30

Please take your time and go through the information printed above in detail.
If the above mentioned information is correct, please enter 'Y' or 'y' to proceed. Press any other key to exit the installation.

```

3. Verify the value of each property carefully before proceeding.
4. If all values are correct, then enter 'Y' or 'y' and press Enter to initiate the installation. The installation utility performs the installation and domain is created silently.

**Figure 5-3 Copying and Extraction of obpininstall-soa.zip**

```

obpininstall-soa.zip                                100% 274MB 137.1MB/s 00:02
obpostinstallsoa.properties                        100% 2153  2.1KB/s 00:00
installobpsosilent.properties                     100% 1107  1.1KB/s 00:00
The configuration of OBP SOA domain shall begin immediately thereafter.
ofssobp@10.180.85.41's password:
Archive:  /scratch/app/product/fmw/target/obpininstall-soa.zip
  inflating: /scratch/app/product/fmw/target/obpsoa_generic.jar
  inflating: /scratch/app/product/fmw/target/installdomain.sh
  inflating: /scratch/app/product/fmw/target/installdomain_silent.sh
--> /usr/lib/jvm/java-1.7.0-openjdk-1.7.0.9.x86_64/bin/java -jar obpsoa_generic.jar -silent ORACLE_HOME=/scratch/app/product/fmw/obpininstall
Launcher log file is /tmp/OraInstall2014-07-22_06-53-49AM/launcher2014-07-22_06-53-49AM.log.
Extracting files....
Starting Oracle Universal Installer

Checking if CPU speed is above 300 MHz.   Actual 3457.998 MHz   Passed
Checking swap space: must be greater than 512 MB.   Actual 15949804 MB   Passed
Checking if this platform requires a 64-bit JVM.   Actual 64   Passed (64-bit not required)
Checking temp space: must be greater than 300 MB.   Actual 169950 MB   Passed

Preparing to launch the Oracle Universal Installer from /tmp/OraInstall2014-07-22_06-53-49AM
.....
Installation Summary

Disk Space : Required 473 MB, Available 169,926 MB
Feature Sets to Install:
  OBP SOA Server FeatureSet 2.3.0.0.0
  Next Generation Install Core 13.2.0.0.0
  OPatch 13.2.0.0.0
.....
You can find the log of this install session at:
/tmp/OraInstall2014-07-22_06-53-49AM/install2014-07-22_06-53-49AM.log

Loading products list. Please wait.
..... 1%
..... 40%

Loading products. Please wait.
..... 44%
..... 47%
..... 50%
..... 53%
..... 56%
..... 60%
..... 63%
..... 66%
..... 70%
..... 73%
..... 76%
..... 80%
..... 83%
..... 86%
..... 90%
..... 93%
..... 96%
..... 99%
.....
Installation in progress (Tuesday, July 22, 2014 6:54:06 AM UTC)

```

Figure 5–4 Domain Creation Confirmation

```

..... 80%
..... 83%
..... 86%
..... 90%
..... 93%
..... 96%
..... 99%
.....
Installation in progress (Tuesday, July 22, 2014 6:54:06 AM UTC)
99% Done.
Install successful

Linking in progress (Tuesday, July 22, 2014 6:54:06 AM UTC)
Link successful

Setup in progress (Tuesday, July 22, 2014 6:54:06 AM UTC)
Setup successful

Saving inventory (Tuesday, July 22, 2014 6:54:06 AM UTC)
Saving inventory complete
Configuration complete

End of install phases.(Tuesday, July 22, 2014 6:54:06 AM UTC)
Logs successfully copied to /scratch/app/product/fmw/obpinstall/inventory/logs.

CLASSPATH=/scratch/app/product/fmw/patch_wls1036/profiles/default/sys_manifest_classpath/weblogic_patch.jar:/scratch/app/product/fmw/patch_opp371/profiles/default/sys_manifest_classpath/weblogic_patch.jar:/scratch/app/product/7rockit-jdk1.6.0_51/lib/cool.jar:/scratch/app/product/fmw/wlserver_10.3/server/lib/weblogic_sp.jar:/scratch/app/product/fmw/wlserver_10.3/server/lib/weblogic.jar:/scratch/app/product/fmw/modules/features/weblogic.server.modules_10.3.6.0.jar:/scratch/app/product/fmw/wlserver_10.3/server/lib/weblogic.jar:/scratch/app/product/fmw/modules/org.apache.ant_1.7.1/lib/ant-all.jar:/scratch/app/product/fmw/modules/net.sf.antcontrib_1.1.0.0_1-0b2/lib/ant-contrib.jar:/scratch/app/product/fmw/obpinstall/common/wlst/resources/wsm-wlst.jar:/scratch/app/product/fmw/oracle_common/modules/oracle.jps_11.1.1/jps-wls-trustprovider.jar:/scratch/app/product/fmw/oracle_common/modules/oracle.jrf_11.1.1/jrf-wlstman.jar:/scratch/app/product/fmw/oracle_common/common/wlst/lib/adscripiting.jar:/scratch/app/product/fmw/oracle_common/common/wlst/lib/ads-share-mbeans-wlst.jar:/scratch/app/product/fmw/oracle_common/common/wlst/lib/mdswlst.jar:/scratch/app/product/fmw/oracle_common/common/wlst/resources/auditwlst.jar:/scratch/app/product/fmw/oracle_common/common/wlst/resources/igfwlsthelp.jar:/scratch/app/product/fmw/oracle_common/common/wlst/resources/jps-wlst.jar:/scratch/app/product/fmw/oracle_common/common/wlst/resources/jps-wls-trustprovider.jar:/scratch/app/product/fmw/oracle_common/common/wlst/resources/jrf-wlst.jar:/scratch/app/product/fmw/oracle_common/common/wlst/resources/omsp_help.jar:/scratch/app/product/fmw/oracle_common/common/wlst/resources/oaauthnProvider.jar:/scratch/app/product/fmw/oracle_common/common/wlst/resources/oaoslap_help.jar:/scratch/app/product/fmw/oracle_common/common/wlst/resources/oaoslap.jar:/scratch/app/product/fmw/oracle_common/common/wlst/resources/ovdwlsthelp.jar:/scratch/app/product/fmw/oracle_common/common/wlst/resources/selconfigwlst.jar:/scratch/app/product/fmw/oracle_common/common/wlst/resources/wsm-wlst.jar:/scratch/app/product/fmw/utills/config/10.3/config-launch.jar:/scratch/app/product/fmw/wlserver_10.3/common/derby/lib/derbynet.jar:/scratch/app/product/fmw/wlserver_10.3/common/derby/lib/derbyclient.jar:/scratch/app/product/fmw/wlserver_10.3/common/derby/lib/derbytools.jar:

Initializing WebLogic Scripting Tool (WLST) ...

Welcome to WebLogic Server Administration Scripting Shell

Type help() for help on available commands

Domain creation started...
Read domain /scratch/app/product/fmw/user_projects/domains/soa domain to applyJRF
Copying JRF configuration files from /scratch/app/product/fmw/oracle_common/modules to /scratch/app/product/fmw/user_projects/domains/soa_domain/config/fmwocnfig/soa_server1
Target JRF components to "obpsoa_cluster1"
Update JRF changes to domain /scratch/app/product/fmw/user_projects/domains/soa_domain in offline mode
Copying JRF configuration files from /scratch/app/product/fmw/oracle_common/modules to /scratch/app/product/fmw/user_projects/domains/soa_domain/config/fmwocnfig/soa_server1/obphumantask_server1
Target JRF components to "obphumantask_cluster1"
Update JRF changes to domain /scratch/app/product/fmw/user_projects/domains/soa_domain in offline mode
Domain created successfully
tofssohnfofess3131508 oui-soa16

```

## 5.2 Post Installation Configuration

This section describes the post installation configuration procedure for Oracle Banking Platform SOA Media Pack. SOA post installation can be done after UI and Host post installation procedures have been completed.

### Checklist for Post Installation Procedure

Before proceeding with the post installation procedure for UI, ensure the following:

- Node manager is not running on the SOA machine.
- All values in obppostinstallsoa.properties are correct
- OID\_DOMAIN\_NAME given in obppostinstallsoa.properties must not exist.
- Node manager port should be free. You can verify using the following command, where 5556 is the Node Manager Port.

```
$netstat -na | grep 5556
```

### Settings

Before starting SOA admin and managed server make the following changes in <middleware home>/user\_projects/domains/<domain name>/bin/setSOADomainEnv.sh:

Change the values to 4096 as shown below:

```
DEFAULT_MEM_ARGS=" -Xms4096m -Xmx4096m"
```



```
PORT_MEM_ARGS="-Xms4096m -Xmx4096m"
```

Also, increase the size of tablespace for MDS (at least 4 GB) and SOAINFRA schema used for SOA domain.

### Host Admin Server

Start the host admin server:

```
$cd <host_middleware_home/user_projects/domains/domain_name>
$./startWebLogic.sh
```

### Host Managed Server

Start the host managed server:

```
$cd <host_middleware_home/user_projects/domains/domain_name/bin>
$./startManagedWebLogic.sh <managed server name> t3://localhost:<admin
server port>
```

### Post Installation Configuration

1. Start the Oracle Banking Platform SOA domain admin WebLogic server by executing the startWebLogic.sh script in the domain directory.

```
cd <middleware home>
cd user_projects/domains/obpsoadomain
./startWebLogic.sh
```

2. Enter the username and password when prompted.
3. Start the managed server – soa\_server1.

```
cd <middleware home>
cd user_projects/domains/obpsoadomain/bin
./startManagedWebLogic.sh soa_server1 t3://localhost:<admin_server_
port>
```

---

**Note:** Do not run the post-install as soon as SOA server comes up.

Wait until it loads all the processes and displays the message *SOA platform is running and accepting requests*.

Initiate post-install after getting this message in the console.

---

4. Once HOST and SOA admin and managed servers are running, execute the post install script 'obp-soa-post-install.sh' created under middleware directory just like other domains.
5. Navigate to the middleware location and give executable permission to the post install script:

```
$cd <soa middleware home>
```

Then execute following script:

```
$./obp-soa-post-install.sh
```

A sample output is given here:

**Figure 5–5 SOA Post Installation Confirmation**

```

[ofsobp@ofs3131508 cui-soa]$ cd /scratch/app/product/fmw/
[ofsobp@ofs3131508 fmw]$ ./obp-soa-post-install.sh
DOMAIN_NAME                : soa_domain
DOMAIN_DIRECTORY_LOCATION  : /scratch/app/product/fmw/user_projects/domains
WEBLOGIC_USERNAME          : weblogic
WEBLOGIC_PASSWORD          : weblogic1
ADMIN_SERVER_LISTEN_ADDRESS : 10.180.85.41
ADMIN_SERVER_LISTEN_PORT   : 7001
SOA_SERVER_LISTEN_ADDRESS  : 10.180.85.41
SOA_SERVER_LISTEN_PORT    : 8001
BAM_SERVER_LISTEN_ADDRESS  : 10.180.85.41
BAM_SERVER_LISTEN_PORT    : 9003
HOST_MANAGED_SERVER_LISTEN_ADDRESS : 10.180.85.39
HOST_MANAGED_SERVER_LISTEN_PORT   : 8001
POLICY_SEEDING_TYPE        : LDAP
LDAP_PROVIDER              : OID
OID_IP                     : 10.180.85.42
OID_PORT                   : 3060
OID_ADMIN_USER             : cn=orcladmin
OID_ADMIN_PWD              : welcome1
OID_DOMAIN_NAME           : ou=soadomain
OID GROUP_DSN              : cn=Groups,dc=fin,dc=oracle,dc=com
OID USER_DSN               : cn=Users,dc=fin,dc=oracle,dc=com
JPS_CONTEXT_DSN           : jpsroot
NODE_MGR_PORT              : 5556
OES_IP                     : 10.180.2.188
OES_MW_HOME                : /scratch/app/product/fmw
OES_DOMAIN_NAME           : cesDomain
OES_UNIX_USER              : ofsobp
SOA_IP                     : 10.180.85.41
SOA_HOME_PATH              : /scratch/app/product/fmw/Oracle_SOA1
SOA_TARGET                 : /scratch/app/product/fmw/target
SOA_JAVA_HOME              : /scratch/app/product/jrockit-jdk1.6.0_51
SOA_MW_HOME                : /scratch/app/product/fmw
UI_IP                      : 10.180.85.40
UI_UNIX_USER               : ofsobp
UI_DOMAIN_HOME             : /scratch/app/product/fmw/user_projects/domains/ui_domain
INSTALL_AS                 : ofsobp
SOA_ADMIN JVM PARAMS       : -Xms512m -Xmx1024m -Xgc:gencon -XXnosystemgc
SOA_MANAGED JVM PARAMS     : -Xms6144m -Xmx6144m -XXnosystemgc -Xms:2048m -XX:-FlightRecorder -Xgc:pausetime
SOA_HUMAN_TASKSERVER JVM PARAMS : -Djbo.ampool.daampooling=false -Xms4096m -Xmx4096m -Xgc:pausetime -XX:-FlightRecorder -XXnosystemgc -Xms:1024m -Dobp.h
ttp.etaleCheckEnabled=false -Dobp.https.idleTimeoutPollInterval=10000 -Dobp.https.maxRetryCount=3 -Dobp.https.socketBufferSize=8192 -Dobp.https.maxConnectionsPer
Host=150 -Dobp.https.connectionTimeout=600000 -Dobp.https.expireAndRetry=false
KEYSTORE_PASSWORD         : welcome1
UCM_READ_FROM_URL         : true
UCM_IP                     : ofs.ucm.com
UCM_PORT                   : 4444
UI_MANAGED_SERVER_LISTEN_ADDRESS : 10.180.85.40
UI_MANAGED_SERVER_LISTEN_PORT   : 8001
DEFAULT_BANK_CODE         : 48
DEFAULT_TRANSACTION_BRANCH_CODE : 8542
DEFAULT_TARGET_UNIT       : SUNCORP
CARD_USERNAME              : orakey
CARD_PASSWORD              : welcome1
RULE_USERNAME              : orakey
RULE_PASSWORD              : welcome1
USER_TIMEZONE              : +5:30
Please take your time and go through the information printed above in detail.
If the above mentioned information is correct, please enter Y or y to proceed. Press any other key to exit the installation.

```

Figure 5–6 SOA Post Installation Completion

```

oracle@OFSMUG-VM-103:/oracle/app/product/fmw
Replace:
  [unzip] Expanding: /oracle/app/product/fmw/obpinstall/obp/workflow/metadata/Metadata.zip into /oracle/app/product/fmw/obpinstall/obp/workflow/metadata/
  metadata
  [unjar] Expanding: /oracle/app/product/fmw/obpinstall/obp/workflow/metadata/metadata/sharedResources.jar into /oracle/app/product/fmw/obpinstall/obp/wor
  kflow/metadata/metadata/sharedResources
  [delete] Deleting: /oracle/app/product/fmw/obpinstall/obp/workflow/metadata/metadata/sharedResources.jar
  [jar] Building jar: /oracle/app/product/fmw/obpinstall/obp/workflow/metadata/metadata/sharedResources.jar
  [zip] Building zip: /oracle/app/product/fmw/obpinstall/obp/workflow/metadata/Metadata_updated.zip
  [delete] Deleting directory /oracle/app/product/fmw/obpinstall/obp/workflow/metadata/metadata

BUILD SUCCESSFUL
Total time: 17 seconds
Verifying OBP_ORACLE_HOME /oracle/app/product/fmw/obpinstall/obp
Buildfile: build.xml

create-manifest-jar:
  [echo] Creating oracle.soa.ext at /oracle/app/product/fmw/Oracle_SOA1/soa/modules/oracle.soa.ext_11.1.1/oracle.soa.ext.jar :/oracle/app/product/fmw/Or
  acle_SOA1/soa/modules/oracle.soa.ext_11.1.1/com.ofas.fc.workflow.dynamic.approvalgroup.jar:/oracle/app/product/fmw/Oracle_SOA1/soa/modules/oracle.soa.ext_1
  1.1.1/classes

BUILD SUCCESSFUL
Total time: 0 seconds
Archive:  BPELRecoveryConfig.zip
  inflating: recoveryconfig.sh
  inflating: BPELRecoveryConfig.jar
0
Updating RecurringScheduleConfig:maxMessageRaiseSize from 0 to 0
Updating StartupScheduleConfig:maxMessageRaiseSize from 0 to 0
javax.management.openbean.CompositeDataSupport (compositeType=javax.management.openbean.CompositeType (name=RecurringScheduleConfig, items=( (itemName=MaxMes
  sageRaiseSize,itemType=javax.management.openbean.SimpleType (name=java.lang.Integer)), (itemName=startWindowTime,itemType=javax.management.openbean.SimpleT
  ype (name=java.lang.String)), (itemName=stopWindowTime,itemType=javax.management.openbean.SimpleType (name=java.lang.String)), (itemName=subsequentTriggerDel
  ay,itemType=javax.management.openbean.SimpleType (name=java.lang.Long)), (itemName=thresholdTimeInMinutes,itemType=javax.management.openbean.SimpleType (nam
  e=java.lang.Integer))))),contents={maxMessageRaiseSize=0, startWindowTime=00:00, stopWindowTime=04:00, subsequentTriggerDelay=300, thresholdTimeInMinutes=1
  0})
null
javax.management.openbean.CompositeDataSupport (compositeType=javax.management.openbean.CompositeType (name=RecoveryConfig, items=( (itemName=ClusterConfig,i
  temType=javax.management.openbean.CompositeType (name=ClusterConfig, items=( (itemName=ClusterDBTimeRefresh,itemType=javax.management.openbean.SimpleType (na
  me=java.lang.Long)), (itemName=heartbeatInterval,itemType=javax.management.openbean.SimpleType (name=java.lang.Long)), (itemName=masterAliveThreshold,itemType
  =javax.management.openbean.SimpleType (name=java.lang.Long)), (itemName=nodeReapInterval,itemType=javax.management.openbean.SimpleType (name=java.lang.Long)
  )), (itemName=nodeReapThreshold,itemType=javax.management.openbean.SimpleType (name=java.lang.Long))))), (itemName=RecurringScheduleConfig,itemType=javax.mana
  gement.openbean.CompositeType (name=RecurringScheduleConfig, items=( (itemName=maxMessageRaiseSize,itemType=javax.management.openbean.SimpleType (name=java.l
  ang.Integer)), (itemName=startWindowTime,itemType=javax.management.openbean.SimpleType (name=java.lang.String)), (itemName=stopWindowTime,itemType=javax.mana
  gement.openbean.SimpleType (name=java.lang.String)), (itemName=subsequentTriggerDelay,itemType=javax.management.openbean.SimpleType (name=java.lang.Long)), (
  itemName=thresholdTimeInMinutes,itemType=javax.management.openbean.SimpleType (name=java.lang.Integer))))), (itemName=StartupScheduleConfig,itemType=javax.m
  anagement.openbean.CompositeType (name=StartupScheduleConfig, items=( (itemName=maxMessageRaiseSize,itemType=javax.management.openbean.SimpleType (name=java
  .lang.Integer)), (itemName=startupRecoveryDuration,itemType=javax.management.openbean.SimpleType (name=java.lang.Long)), (itemName=subsequentTriggerDelay,ite
  mType=javax.management.openbean.SimpleType (name=java.lang.Long))))), contents={ClusterConfig=null, RecurringScheduleConfig=javax.management.openbean.Com
  positeDataSupport (compositeType=javax.management.openbean.CompositeType (name=RecurringScheduleConfig, items=( (itemName=maxMessageRaiseSize,itemType=javax.m
  anagement.openbean.SimpleType (name=java.lang.Integer)), (itemName=startWindowTime,itemType=javax.management.openbean.SimpleType (name=java.lang.String)), (l
  temName=stopWindowTime,itemType=javax.management.openbean.SimpleType (name=java.lang.String)), (itemName=subsequentTriggerDelay,itemType=javax.management.op
  enbean.SimpleType (name=java.lang.Long)), (itemName=thresholdTimeInMinutes,itemType=javax.management.openbean.SimpleType (name=java.lang.Integer))), conten
  ts={maxMessageRaiseSize=0, startWindowTime=00:00, stopWindowTime=04:00, subsequentTriggerDelay=300, thresholdTimeInMinutes=10}), StartupScheduleConfig=jav
  ax.management.openbean.CompositeDataSupport (compositeType=javax.management.openbean.CompositeType (name=StartupScheduleConfig, items=( (itemName=maxMessageR
  aiseSize,itemType=javax.management.openbean.SimpleType (name=java.lang.Integer)), (itemName=startupRecoveryDuration,itemType=javax.management.openbean.Simpl
  eType (name=java.lang.Long)), (itemName=subsequentTriggerDelay,itemType=javax.management.openbean.SimpleType (name=java.lang.Long))), contents={maxMessageRa
  iseSize=0, startupRecoveryDuration=600, subsequentTriggerDelay=300})})
[oracle@OFSMUG-VM-103825.113 fmw]$

```

6. For monitoring the script run, check the following log files created under the SOA domain directory:

- deploy-composite-SOA-WLST.log
- post-obp-SOA-WLST.log
- post-soa-DynamicApprovalGroup-log.txt
- post-soa-GrantAndPolicySet-log.log
- post-soa-taskflow-grants.log



---

---

# Oracle Banking Platform Reference Process Models Media Pack Installation

This chapter details the steps involved in the installation of Oracle Banking Platform Reference Process Models Media pack (Media pack 4).

The business processes that are supported by Oracle Banking Platform (OBP) in this release have been defined using Oracle BPA – Oracle Business Process Analysis suite.

## 6.1 Pre-Installation Steps

This section lists the pre-installation steps required for Oracle Banking Platform Reference Process Models Media Pack.

The media pack consists of two distinct formats of the process maps in two separate folders:

- **BPA Database**

In order to be able to view the process maps from the BPA database, it is mandatory that Oracle BPA Version 11.x has been installed in a server and appropriately configured based on specific installation needs.

For more information, see the Oracle BPA Installation guide.

- **HTML Output**

The HTML version of the process maps can be viewed using a browser and does not require that BPA be installed.

Copy the zip file from the media pack and unzip the contents with the password provided on a server or desktop.

The zip file consists of two folders:

- rpm\_bpa containing BPA database
- rpm\_html containing the HTML files

## 6.2 Installing RPM Process Maps

This section lists the installation steps required for the Reference Process Models Process Maps.

### 6.2.1 Restoration of the database (.adb file) on Oracle BPA


This section lists the steps for restoration of database on Oracle BPA.

### Step 1 Restoring the RPM Process Database

To restore the RPM Process Database:


1. Launch Oracle Business Process Architect from a client machine.
2. Select the Administration module from the **Modules** panel.
3. Select the appropriate server in the **Navigation** panel on which RPM is to be installed.

**Figure 6–1 Select Server for RPM Process Database**

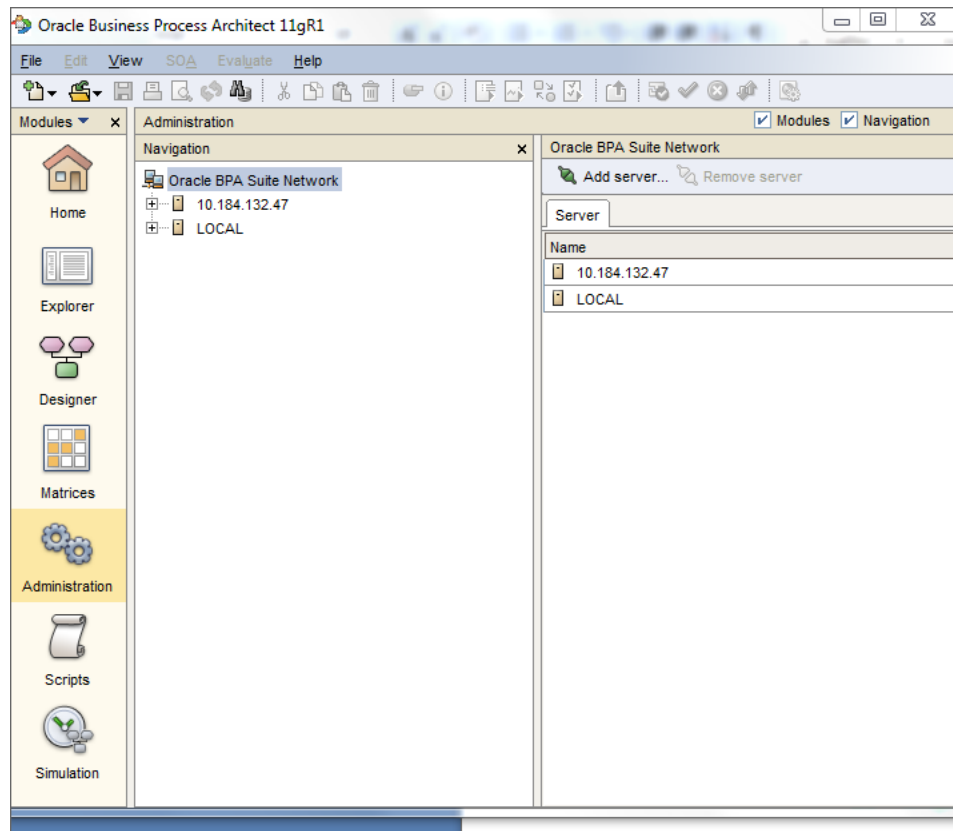


4. Right-click and select **Restore** to restore the RPM Process Database.
5. Enter the Database administrator password and click **OK**.

**Figure 6–2 Enter Database Administrator Password**

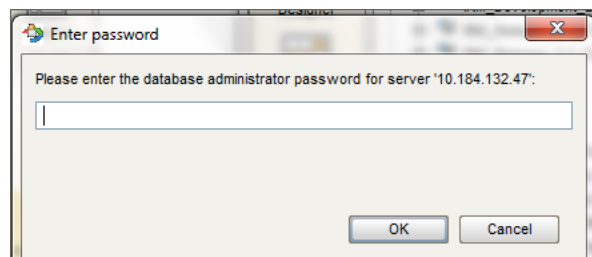

6. In the pop-up window enter the location where the zip files from the media pack have been copied and unzipped. Select the location of the file 'Reference Process Model for Banking Platform Release 2.3.0.0.0.adb' under the folder 'rpm\_bpa'.

**Figure 6–3 Select Database File to Restore**

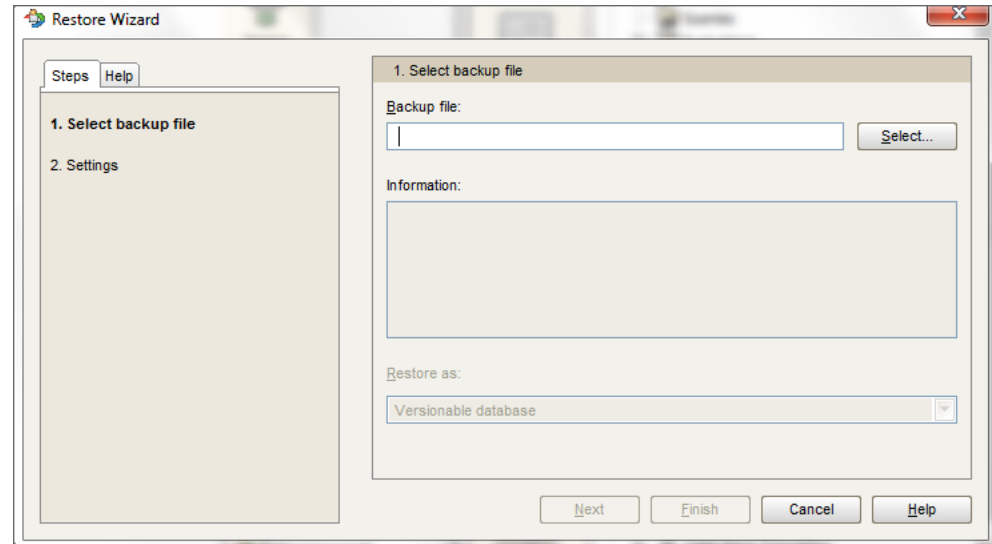


7. Click **Finish**. The RPM database gets restored within Oracle BPA.

### Step 2 Importing the RPM\_OBP Filter

To import the RPM Filter:


1. Launch Oracle Business Process Architect from a client machine.
2. Select Administration module from the **Modules** panel.
3. Select the appropriate server in the **Navigation** panel for importing the RPM filter.
4. Select **Configuration** option from the Navigation panel and provide the configuration administrator password. Click **OK**.

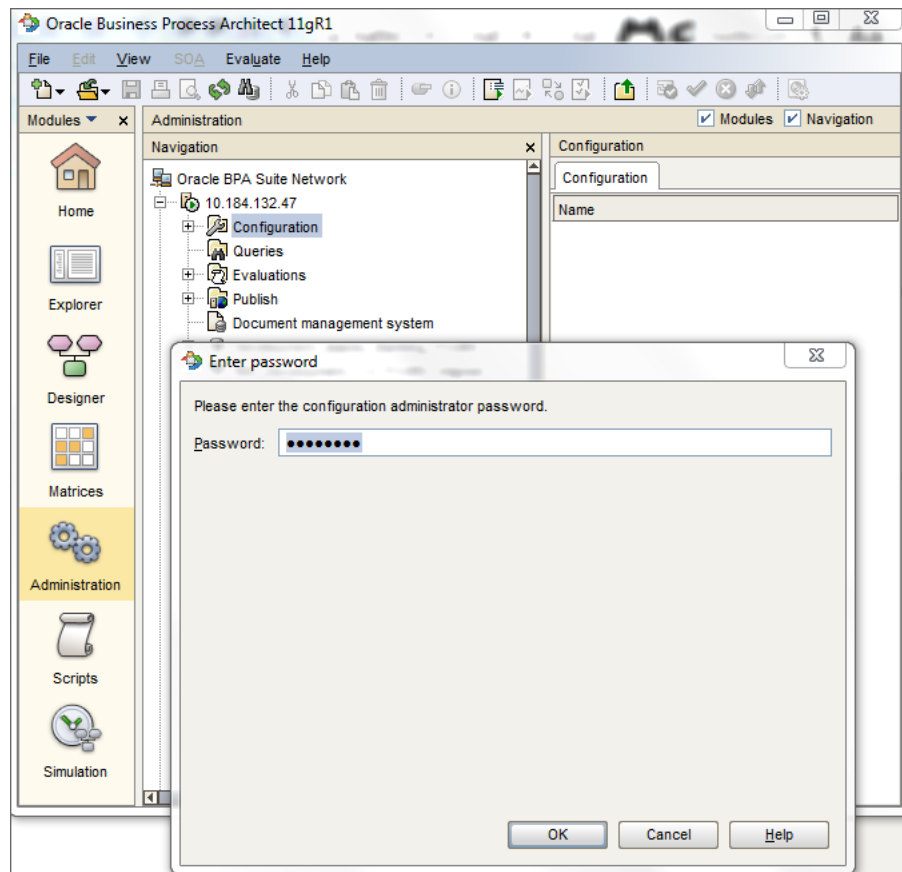**Figure 6–4 Configuration Administrator Password**

5. Select **Conventions** under Configuration.
6. Next select **Filter** under Conventions.
7. Right-click and select **Import** to import the downloaded filter RPM\_OBP Filter.amc.
8. Browse to select the location of the file RPM\_OBP Filter.amc.



Figure 6–5 Select AMC File to Import

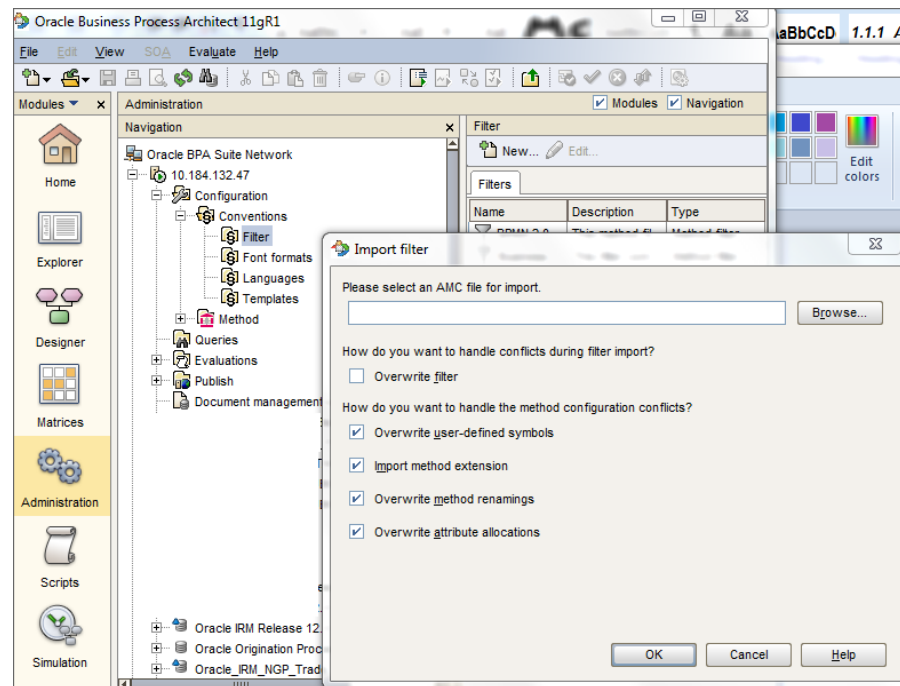

9. Click **OK**. The RPM\_OBP Filter.amc gets imported to the database.

---

**Note:** The imported RPM\_OBP Filter.amc should be used while viewing the business maps within the RPM Database.

---

### Step 3 Post Installation Configuration

This section specifies the post installation configuration required for the RPM Business Processes installation.

1. Open the RPM database and log in with the following credentials:

User id:           system  
 Password:         manager11

2. Select Administration from the Navigation panel.
3. From the drop-down options select **users** to change the system user password, to add groups or users and to provide appropriate access rights as per your organizational norms and requirements.

## 6.2.2 Restoration of HTML Files

This section lists the steps for restoration of database on Oracle BPA.

### Step 1 Copy the HTML Files

Copy all the files from the folder rpm\_html to the selected server which will be hosting the HTML. Ensure that required permissions are available to the users to access the folder.

**Step 2 Provide the URL**

The URL where the html is hosted should be provided to the users in order to access this:

`http://<hostname>:<hostport>/<RPM Process Models Path>/index.htm`

---

---

## Standalone Database Setup – Running Repository Creation Utility (RCU)

This chapter details the steps involved in Oracle Banking Platform Database which are primarily concerned with importing an existing database dump of the QA database.

---

---

**Note:** In case the Oracle Banking Platform database is manually created and seeded, then you need to skip this during `installobp.sh` by clicking **Cancel** which causes the script to skip this step and proceed with the rest of the installation workflow.

---

---

### 7.1 Pre-Installation Steps

The following steps should be completed prior to the process of executing the installation steps for the Oracle Banking Platform DB mentioned in [Section 7.2, "Oracle Banking Platform Database Setup – RCU Installation"](#):

1. Oracle Database Enterprise Edition 11.2.0.3.0 is installed on the database server.
2. Obtain the tar file `obprcu.tar` from Oracle Banking Platform Host media pack and copy it onto the database server.

### 7.2 Oracle Banking Platform Database Setup – RCU Installation

Following steps should be performed to create the Oracle Banking Platform DB schema:

1. To manually create host db schema, copy the tar file `obprcu.tar` and `installrcu.sh` (Extract `obpinstall-host.zip` to get these two files) to a directory on the DB server.
2. In Linux console navigate to that directory and run the `installrcu.sh` using the following:

```
#!/installrcu_silent.sh $HOST_TARGET $OBP_HOST_DB_IP $OBP_HOST_DB_PORT
$OBP_HOST_DB_SERVICE_NAME $HOST_DB_SCHEMA_PREFIX $OBP_HOST_DB_PASSWORD
$MDS_HOST_DB_PASSWORD
```

Here `$HOST_TARGET` is the location which contains the `obprcu.tar.gz` and the `installrcu.sh` file.

Use the actual values in arguments, such as:

```
./installrcu_silent.sh /oracle/app/product/fmw/target 10.180.25.200
1521 OBPDB DEV15 welcome1 welcome1
```

It will create two schema named as DEV15\_OBP\_HOST and DEV15\_MDS in the db.

**Figure 7-1 Host DB Schema Setup Confirmation**

```

root@IFLMUDSIM00385:/opt/oracle/fmw/sudip_MW_11.1.1.6/mediapack_silent/host
AMUSER_OUTBOUND_USERNAME      : amuserweblogic
AMUSER_OUTBOUND_PASSWORD      : weblogic1
POSUSER_OUTBOUND_USERNAME     : posuserweblogic
POSUSER_OUTBOUND_PASSWORD     : weblogic1
DMSHOST_OUTBOUND_USERNAME     : dmshostweblogic
DMSHOST_OUTBOUND_PASSWORD     : weblogic1
DMSUI_OUTBOUND_USERNAME       : dmsuiweblogic
DMSUI_OUTBOUND_PASSWORD       : weblogic1
KEYSTORE_PASSWORD             : welc0me1
UCM_READ_FROM_URL             : true
UCM_IP                         : ofes.ucm.com
UCM_PORT                       : 4444

Please take your time and go through the information printed above in detail.
If the above mentioned information is correct, please enter Y or y to proceed. Press any other key to exit the installation.
y
Installation will begin in sometime.
Please wait while the installables are copied onto the servers.

#####
This computer including any devices attached to this computer and the
information systems accessed from this point contain information that is
confidential.

Your activities and use of these facilities are monitored.
Your use of (and related activities in connection with) these facilities is
recorded and may be reviewed at any time.

For Support You may Contact,
InfraStructure Team
#####
oracle@10.180.25.15's password:
obpininstall-host.zip                100% 743MB 11.3MB/s 01:06
obpostinstallhost.properties        100% 3090  3.0KB/s 00:00
installobphostsilent.properties     100% 714   0.7KB/s 00:00
#####
This computer including any devices attached to this computer and the
information systems accessed from this point contain information that is
confidential.

Your activities and use of these facilities are monitored.
Your use of (and related activities in connection with) these facilities is
recorded and may be reviewed at any time.

For Support You may Contact,
InfraStructure Team
#####
oracle@10.180.25.15's password:
Archive:  /oracle/app/product/fmw/target/obpininstall-host.zip
  inflating: /oracle/app/product/fmw/target/obpininstall.tar.gz
  inflating: /oracle/app/product/fmw/target/obprcu.tar.gz
  inflating: /oracle/app/product/fmw/target/installrcu.sh
  inflating: /oracle/app/product/fmw/target/installDomain.sh
  extracting: /oracle/app/product/fmw/target/1d1f.zip
Finished copying the installables to the target server.
Press Y or y to proceed for host db seeding, else press any other key to skip it.
y

```

Figure 7–2 Enter Database Credentials

```

root@IFLMUD51M00385:/opt/oracle/fmw/sudip_MW_11.1.1.6/mediapack_silent/host
confidential.

Your activities and use of these facilities are monitored.
Your use of (and related activities in connection with) these facilities is
recorded and may be reviewed at any time.

For Support You may Contact,
InfraStructure Team
#####

oracle@10.180.25.15's password:
obpininstall-host.zip                               100% 743MB 11.3M
obpostinstallhost.properties                       100% 3090  3.0K
installobphostsilent.properties                   100%  714  0.7K

#####
This computer including any devices attached to this computer and the
information systems accessed from this point contain information that is
confidential.

Your activities and use of these facilities are monitored.
Your use of (and related activities in connection with) these facilities is
recorded and may be reviewed at any time.

For Support You may Contact,
InfraStructure Team
#####

oracle@10.180.25.15's password:
Archive:  /oracle/app/product/fmw/target/obpininstall-host.zip
  inflating: /oracle/app/product/fmw/target/obpininstall.tar.gz
  inflating: /oracle/app/product/fmw/target/obprcu.tar.gz
  inflating: /oracle/app/product/fmw/target/installrcu.sh
  inflating: /oracle/app/product/fmw/target/installdomain.sh
  extracting: /oracle/app/product/fmw/target/ldif.zip
Finished copying the installables to the target server.
Press Y or y to proceed for host db seeding,else press any other key to skip it.
Y

#####
This computer including any devices attached to this computer and the
information systems accessed from this point contain information that is
confidential.

Your activities and use of these facilities are monitored.
Your use of (and related activities in connection with) these facilities is
recorded and may be reviewed at any time.

For Support You may Contact,
InfraStructure Team
#####

oracle@10.180.25.15's password:
Extracting obprcu.tar.gz...
obprcu.tar.gz extracted.

Enter the username of SYSDBA user:
sys
Enter the password of SYSDBA user:
welcome!

```

Figure 7-3 Creation of Host DB Schema

```
root@IFLMUD51M00385:/opt/oracle/fmw/sudip_MW_11.1.1.6/mediapack_silent/host
Your use of (and related activities in connection with) these facilities is
recorded and may be reviewed at any time.

For Support You may Contact,
InfraStructure Team
#####

oracle@10.180.25.15's password:
Archive: /oracle/app/product/fmw/target/obpinstall-host.zip
  inflating: /oracle/app/product/fmw/target/obpinstall.tar.gz
  inflating: /oracle/app/product/fmw/target/obprcu.tar.gz
  inflating: /oracle/app/product/fmw/target/installrcu.sh
  inflating: /oracle/app/product/fmw/target/installdomain.sh
  extracting: /oracle/app/product/fmw/target/ldif.zip
Finished copying the installables to the target server.
Press Y or y to proceed for host db seeding, else press any other key to skip it.
Y

#####
This computer including any devices attached to this computer and the
information systems accessed from this point contain information that is
confidential.

Your activities and use of these facilities are monitored.
Your use of (and related activities in connection with) these facilities is
recorded and may be reviewed at any time.

For Support You may Contact,
InfraStructure Team
#####

oracle@10.180.25.15's password:
Extracting obprcu.tar.gz...
obprcu.tar.gz extracted.

Enter the username of SYSDBA user:
sys
Enter the password of SYSDBA user:
welcome1

The OBP DB installation started...

Processing command line ....
Repository Creation Utility - Checking Prerequisites
Checking Global Prerequisites

Repository Creation Utility - Checking Prerequisites
Checking Component Prerequisites
Repository Creation Utility - Creating Tablespaces
Validating and Creating Tablespaces
Repository Creation Utility - Create
Repository Create in progress.
Percent Complete: 0
Percent Complete: 6
Percent Complete: 12
Percent Complete: 12
Percent Complete: 37
Percent Complete: 37
```

Figure 7-4 Completion of Host DB Schema Creation

```

root@FLMUD51M00385:/opt/oracle/fmw/sudip_MW_11.1.1.6/mediapack_silent/host
Enter the username of SYSDBA user:
sys
Enter the password of SYSDBA user:
welcome1

The OBP DB installation started...

Processing command line ....
Repository Creation Utility - Checking Prerequisites
Checking Global Prerequisites

Repository Creation Utility - Checking Prerequisites
Checking Component Prerequisites
Repository Creation Utility - Creating Tablespaces
Validating and Creating Tablespaces
Repository Creation Utility - Create
Repository Create in progress.
Percent Complete: 0
Percent Complete: 6
Percent Complete: 12
Percent Complete: 12
Percent Complete: 37
Percent Complete: 37
Percent Complete: 53
Percent Complete: 53
Percent Complete: 75
Percent Complete: 100
Repository Creation Utility: Create - Completion Summary
Database details:
Host Name          : 10.180.25.200
Port               : 1521
Service Name       : OBPDB
Connected As       : sys
Prefix for (prefixable) Schema Owners : DEV29
RCU Logfile        : /oracle/app/product/fmw/target/obprcu/rcuHome/rcu/log/logdir.2012-12-24_16-24/rcu.log
Component schemas created:
Component          Status Logfile
Metadata Services Success /oracle/app/product/fmw/target/obprcu/rcuHome/rcu/log/logdir.2012-12-24_16-24/mds.log
Oracle OBP HOST    Success /oracle/app/product/fmw/target/obprcu/rcuHome/rcu/log/logdir.2012-12-24_16-24/obp_host.log

Repository Creation Utility - Create : Operation Completed
Finished installing the OBP DB schema.
The configuration of OBP Host domain shall begin immediately thereafter. Press any key to begin.

#####
This computer including any devices attached to this computer and the
information systems accessed from this point contain information that is
confidential.

Your activities and use of these facilities are monitored.
Your use of (and related activities in connection with) these facilities is
recorded and may be reviewed at any time.

For Support You may Contact,
InfraStructure Team
#####
oracle@10.180.25.15's password:

```

## 7.3 Completion of Host DB Schema Creation Verification

This section describes verification steps that can be taken to check if the Database setup is complete. The procedure to check if the DB setup is complete is as follows:

1. Verify that the new tablespace is created.
2. Logon to the database with user id of the user specified in the import script.
3. Execute the query “select \* from tab;” on the sql prompt to verify that the OBP tables are present.

## 7.4 HOST DB Schema Seeding

This section provides information on the Host Database Schema Seeding. The procedure is as follows:

1. After the host db schema has been created successfully, copy the ‘seed’ folder from ‘\$HOST\_TARGET /obprcu/rcuHome/rcu/integration/obphost/sql/ORACLE’ location to any machine where ‘sqlplus’ is available (TNS entry of the host db may be required in that machine to enable connectivity from the machine to the host db server).
2. Now open command prompt and navigate inside the ‘seed’ folder in the local machine where it has been copied. Run the following commands using the actual details of host db schema which was created.

```
PROMPT> sqlplus schemauser/password@TNSEntryOfDB @seed.sql
```

For example, assume that the seed is being executed from 'D:\seed' folder of a Windows machine having sqlplus console available for execution of sql commands and scripts.

```
C:> D:
```

```
C:> cd D:\seed
```

```
D:\seed > sqlplus DEV15_OBP_HOST@welcome1@OBPDB @seed.sql
```

It will take some time to completely execute all the seed scripts. It will ask for some inputs at the time of seeding, just press Enter to continue. When OBP DB seeding is completed, the control will return to the sql prompt.

## 7.5 System Configuration DB Update Script Execution

After the host db schema has been created successfully, copy the 'updateSystemDetails.sql' file from 'HOST\_MW\_HOME' location to any machine where 'sqlplus' is available. (TNS entry of the host db may be required in that machine to enable connectivity from the machine to the host db server).

Now, open command prompt and navigate 'updateSystemDetails.sql' file in the local machine where it has been copied. Then run the following using the actual details of host db schema which was created.

```
PROMPT> sqlplus schemauser/password@TNSEntryOfDB @  
updateSystemDetails.sql
```

For example, assume that the seed is being executed from 'D:\script' folder of a Windows machine having sqlplus console available for execution of sql commands and scripts.

```
C:> D:
```

```
C:> cd D:\script
```

```
D:\seed > sqlplus DEV15_OBP_HOST@welcome1@OBPDB @ updateSystemDetails.sql
```



---

# Oracle Banking Platform and IPM Integration

This chapter details the steps involved in the integration of Oracle Banking Platform and Oracle Imaging and Process Management (IPM).

OBP integrates natively with Oracle IPM as the content management solution. Configuration information relevant from an OBP point of view is provided in the following sections:

- [Section 8.1, "IPM Application Creation"](#)
- [Section 8.2, "Manage Inputs"](#)

The steps listed therein should be followed to configure IPM to facilitate it to integrate with OBP. However, you can see the administration guide for Oracle IPM for details on how to manage connections, inputs and applications in IPM.

## 8.1 IPM Application Creation

This section provides information on creation of the IPM application. This is a mandatory configuration required on the IPM side to enable integration of OBP with IPM for content management.

### 8.1.1 Manage Connections

This section provides information on managing connections in IPM. The following connection profiles will be used during creation of the applications in the next section [Manage Applications](#).

#### 8.1.1.1 UCM Connection

UCM connection is used to point to the underlying UCM Server where the documents are stored.

- OBP\_IPM\_UCM\_CONN\_NAME
- OBP\_IPM\_UCM\_CONN\_PORT

#### 8.1.1.2 Workflow Connection

Workflow connection is used to point to the 'IPMBulkUpload' BPEL process deployed on the SOA server as part of the SOA media pack installation process.

- OBP\_IPM\_SOA\_CONN\_NAME
- SOA\_MANAGED\_SERVER\_LISTEN\_ADDRESS
- SOA\_MANAGED\_SERVER\_LISTEN\_PORT

## 8.1.2 Manage Applications

This section provides information on managing applications in IPM.

See the Oracle Banking Platform Administrator's Guide for Oracle IPM for details on how to create an application in IPM. Following are the steps to manage applications in IPM:

1. Create a main application and a temporary application in IPM using the names listed for properties OBP\_IPM\_MAIN\_APP\_NAME and OBP\_IPM\_TEMP\_APP\_NAME in the installation checklist [Updating installobp\\*\\*\\*.properties](#) respectively.

The field definitions to be used during creation of an application have been depicted in [Figure 8-1, "IPM Application Field Definitions"](#) and workflow configuration details have been depicted in [Figure 8-2, "IPM Application Workflow Configuration"](#).

The applications should be created with the details as depicted below. The application ID generated for both the applications should be noted for use in the next step.

**Figure 8-1 IPM Application Field Definitions**

Type	Name	Length	Scale	Required	Indexed	Default Value	Picklist
Abc	Document Type	80		<input type="checkbox"/>	<input checked="" type="checkbox"/>		
Abc	Customer Id	80		<input type="checkbox"/>	<input checked="" type="checkbox"/>		
Abc	FCDocId	80		<input type="checkbox"/>	<input checked="" type="checkbox"/>		
Abc	UploadType	80		<input type="checkbox"/>	<input checked="" type="checkbox"/>		

**Figure 8-2 IPM Application Workflow Configuration**

Payload Properties	Mapped Value
process.CustomerId	FieldValue CustomerId
process.DocumentType	FieldValue DocumentType
process.FCDocId	FieldValue FCDocId
process.UploadType	FieldValue UploadType
process.docId	DocId
process.docURL	DocURL

2. The application id generated for the main and temporary applications created in the previous step should be updated in the OBP DB schema table flx\_cm\_doc\_typ\_meta\_data using the following SQL statements:

---



---

**Note:** In the SQL statements, replace the <main application id> with the application id generated for the IPM application OBP\_IPM\_MAIN\_APP\_NAME listed in the checklist and <temporary application id> with the application id generated for the IPM application OBP\_IPM\_TEMP\_APP\_NAME listed in the checklist, with the actual generated.

---



---

**SQL for main application:**

```
update flx_cm_doc_typ_meta_data
set app_id = '<main application id>'
where doc_typ_id = 'MAIN';
```

**SQL for temp application:**

```
update flx_cm_doc_typ_meta_data tp
set app_id = '<temporary application id>'
where doc_typ_id = 'TEMP';
```

3. Create a temporary folder on the middleware Host server and specify the folder name against PROPERTY\_FILE\_PATH\_FOR\_MANIFEST in the property file oracleipm.properties.


## 8.2 Manage Inputs

Manage Inputs is an optional configuration step. It is required only for banks that need to upload documents in bulk. Creation of an input configuration results in defining an input file format and mapping the file input data with the application field definitions. This file format is then deciphered by the IPM Bulk data upload feature (known as a document upload input agent in IPM), which uploads scanned documents from a shared folder into IPM.

This upload takes place in the following steps:

1. A file containing details of the scanned documents to be uploaded is taken as input from a location on the server. This location has to be configured in the System MBean Browser as shown below:

**Figure 8–3 IPM Bulk Upload Input Location**

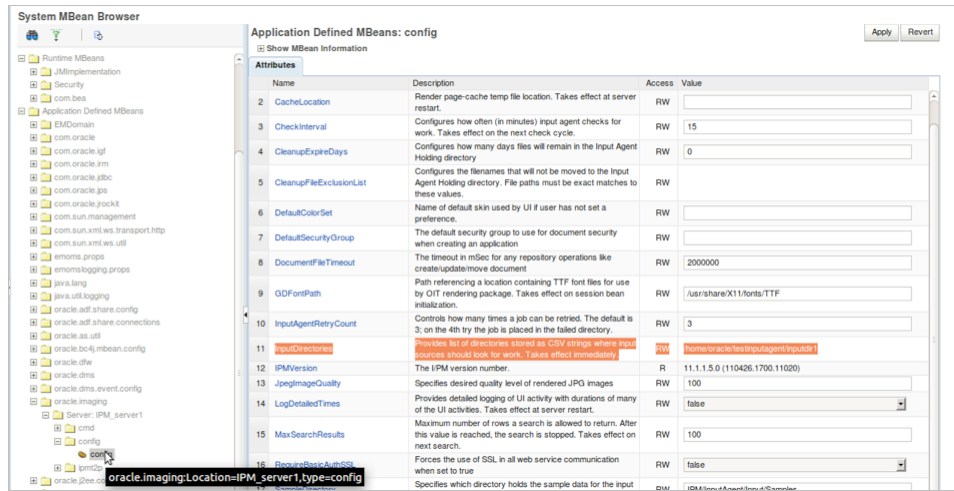

2. Uploads the scanned documents as specified in the input file.
3. Invokes the 'IPMBulkUpload' BPEL process deployed on the SOA server as part of the SOA media pack installation process.
4. The BPEL process updates the IPM document reference id in OBP for the document record.

---

---

## BIP Datasource Creation

This chapter explains the steps required for Oracle Banking Platform BIP (BI Publisher) datasource creation.

### 9.1 BIP Datasource Creation


To use BIP, it is required to create datasource in BIP server. This can be done after Host pre-install. The data source must point to the same db schema as given in BIP\_DATASOURCE\_NAME in installobphost.properties.

Follow the below mentioned steps to create the datasource:

1. Open a browser and navigate to:  
<BIP\_SERVER\_IP>:<BIP\_SERVER\_PORT>/xmlpserver
2. Log on using the following credentials:


<b>Username</b>	<BIP_SERVER_ USER>
<b>Password</b>	<BIP_SERVER_ PSWD>

Figure 9–1 BIP Server Console Login

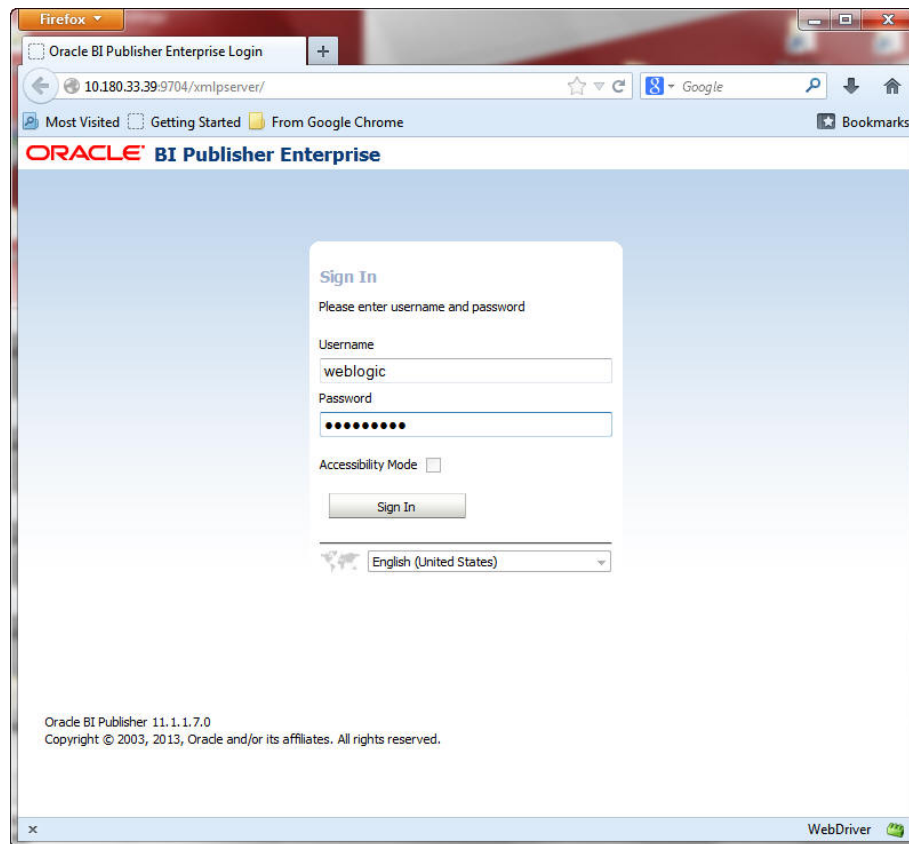


3. After logging in, click **Administration**.

Figure 9–2 BIP Administration

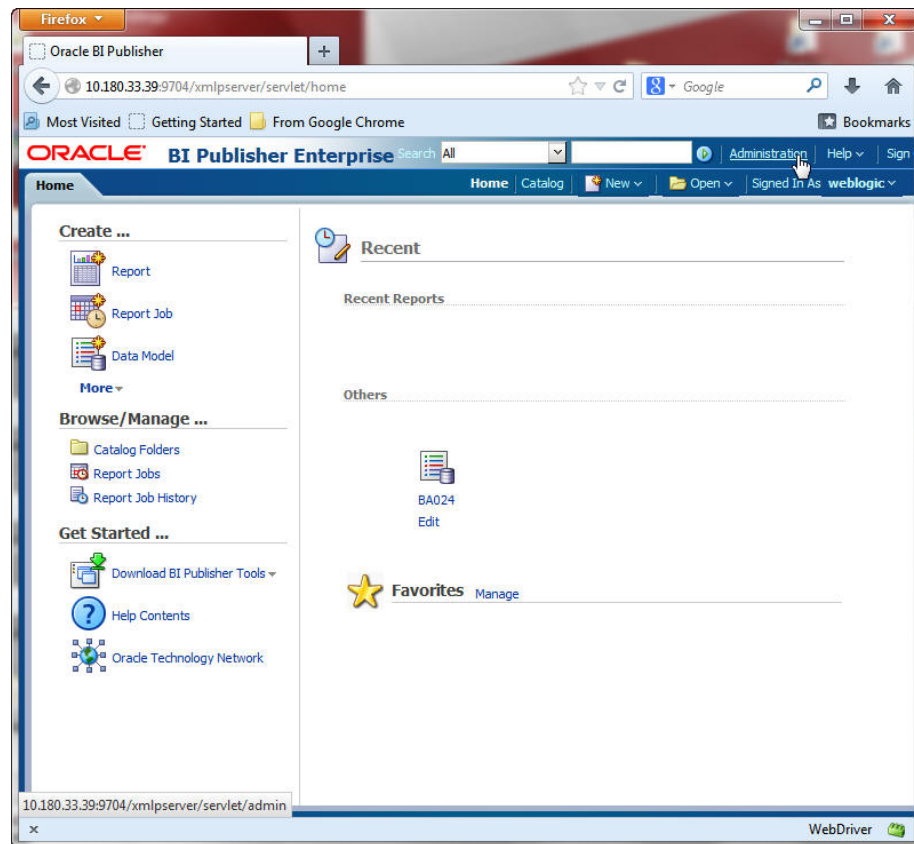

4. Click JDBC Connection under Data Sources.


Figure 9–3 BIP JDBC Connection

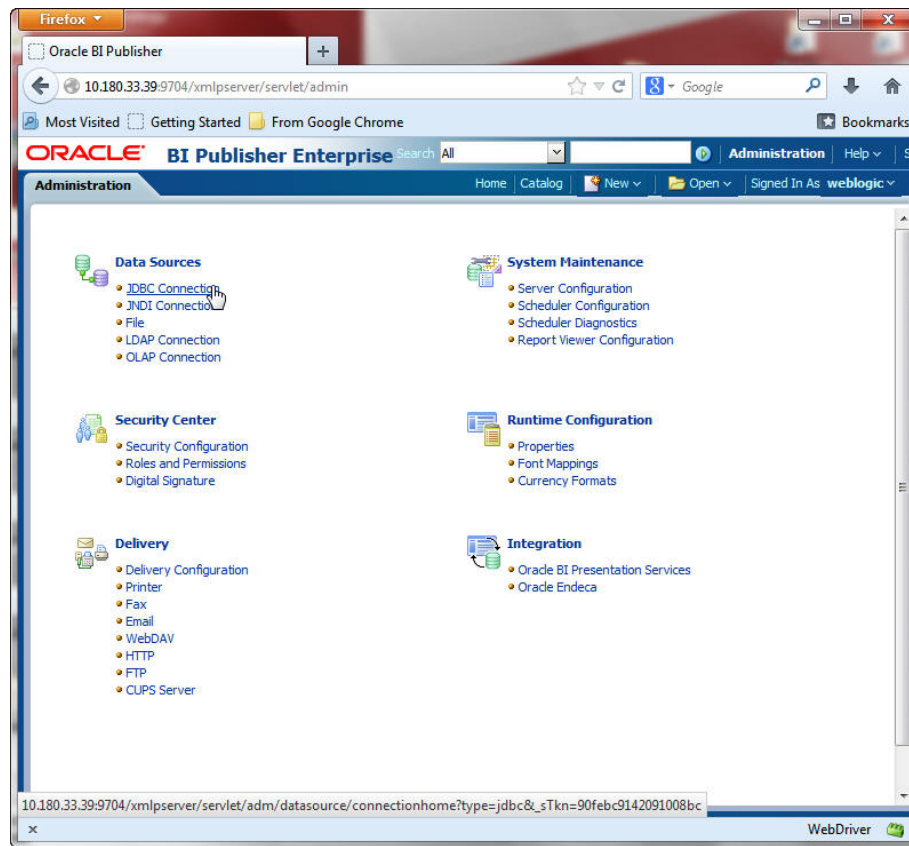

5. Click the **Add Data Source** button.



Figure 9–4 BIP - Add Data Source

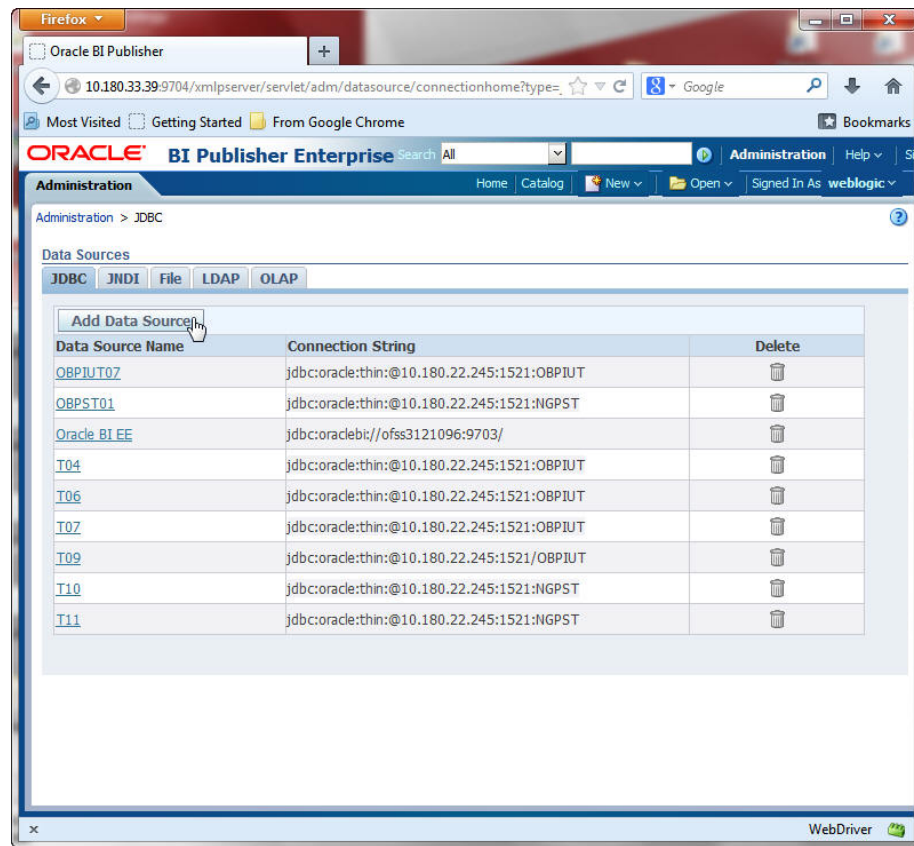


6. Fill up the following fields:

**Table 9–1 Data Source Details**

Field Name	Description
Data Source Name	Any name can be given here
Driver Type	Oracle 11g
Database Driver Class	oracle.jdbc.OracleDriver
Connection String	jdbc:oracle:thin:@<OBP_HOST_DB_IP>:<OBP_HOST_DB_PORT>:<OBP_HOST_DB_SERVICE_NAME>
Username	<BIP_DATASOURCE_NAME>
Password	<OBP_HOST_DB_PASSWORD>

7. Click **Ok**.

Figure 9-5 BIP Data Source Created

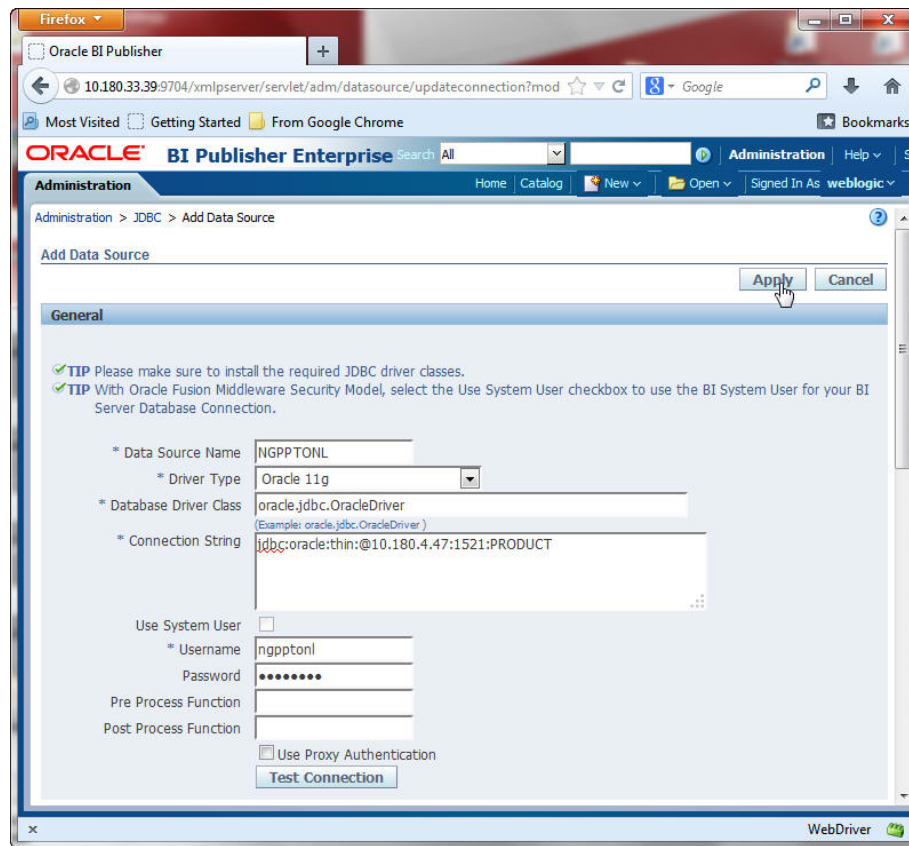

---

# Monitoring Servers Using Oracle Enterprise Manager

This chapter lists the steps required to monitor servers using Oracle Enterprise Manager (EM).

The OBP servers can be monitored using Oracle Enterprise Manager (EM). 'em\_monitor.zip' is available inside 'host.zip' for this purpose. The procedure is as follows:

1. Extract the 'host.zip' to get 'em\_monitor.zip'.
2. Extract 'em\_monitor.zip'.  
It contains 'obp\_em\_view\_script' folder and 'EM\_VIEW\_READ\_ME.doc'.
3. Follow the procedures given in this chapter for monitoring the OBP Servers.

## 10.1 Add EM Agents


Following are the steps involved to add EM agents, middleware, and database instances on the EM:

1. Add the EM agents to the HOST, UI, SOA, OID, and HOST Database servers of the environment.
2. After adding the agents, create the middlewares for the servers.

Following are the steps to create middlewares for the servers.


- a. Log on to the EM UI.
- b. Add a middleware from the **Target** tab.

Figure 10–1 Add Middlewares

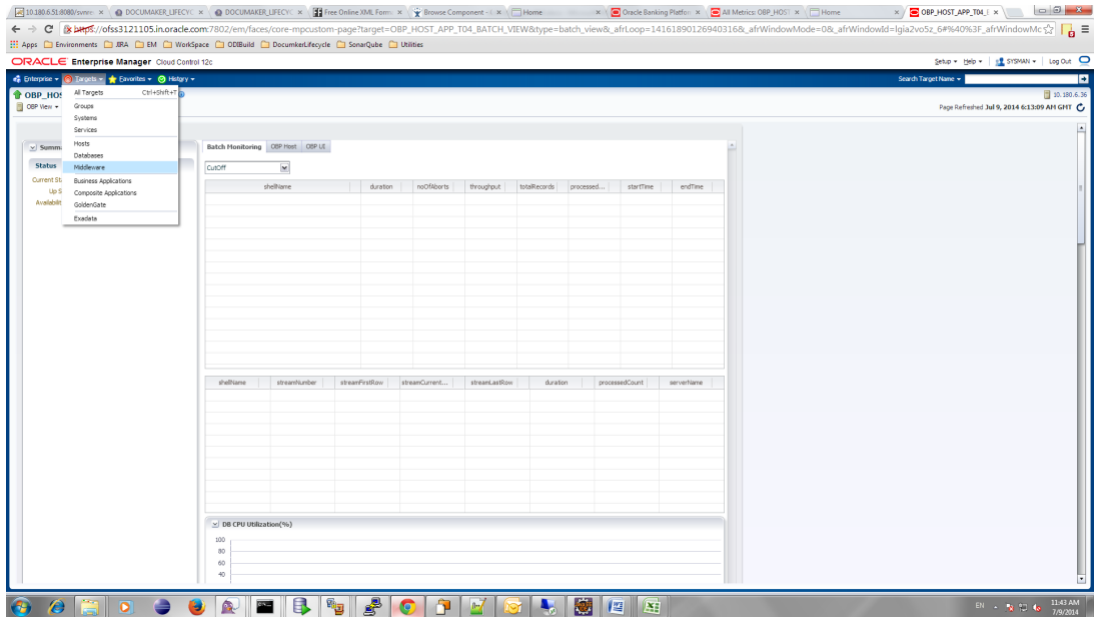

c. Add a new Oracle Fusion Middleware or WebLogic Domain.

Figure 10–2 Add Oracle Fusion Middleware or WebLogic Domain

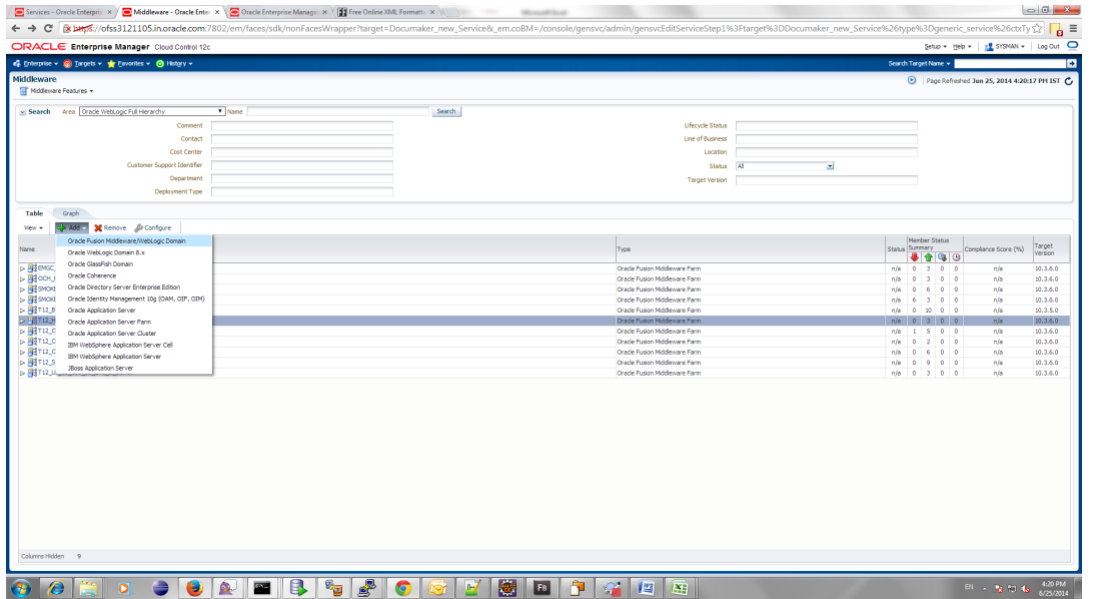


d. Enter the details of the server for which the middleware is to be created.  
 For example, for T12 HOST:  
**Administration Server Host** : 10.180.33.236  
**Port**: Automatically detected  
**Username**: weblogic  
**Password**: welcome1

**Unique Domain Identifier:** T12\_HOST\_10\_180\_33\_336 (exactly the same format has to be entered; so for T12 UI middleware creation Unique Domain Identifier should be: T12\_UI\_10\_180\_33\_241)

**Agent:** It is automatically detected after you enter the Administration Server Host name.


**Figure 10–3 Enter Server Details**

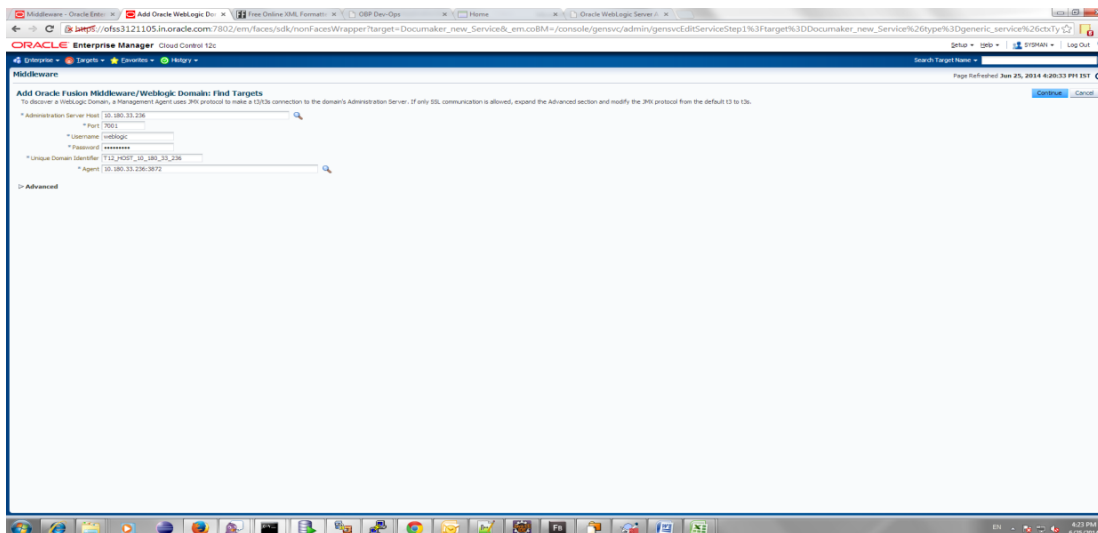

e. Click **Continue**.

The targets for the server are identified.


**Figure 10–4 Identify Targets**

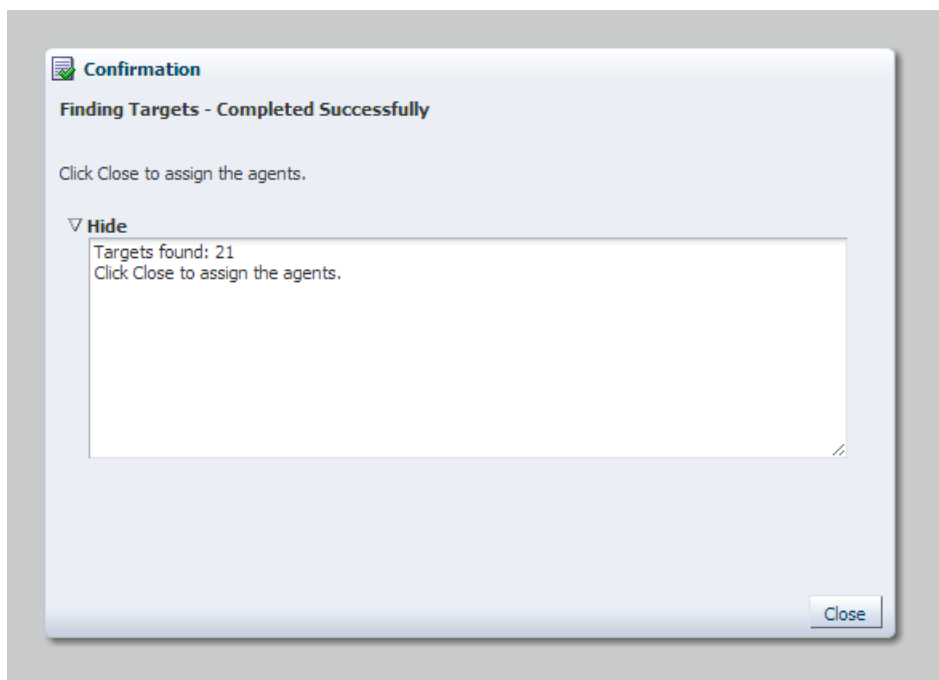

f. Click **Close**.



Figure 10–6 Select Import

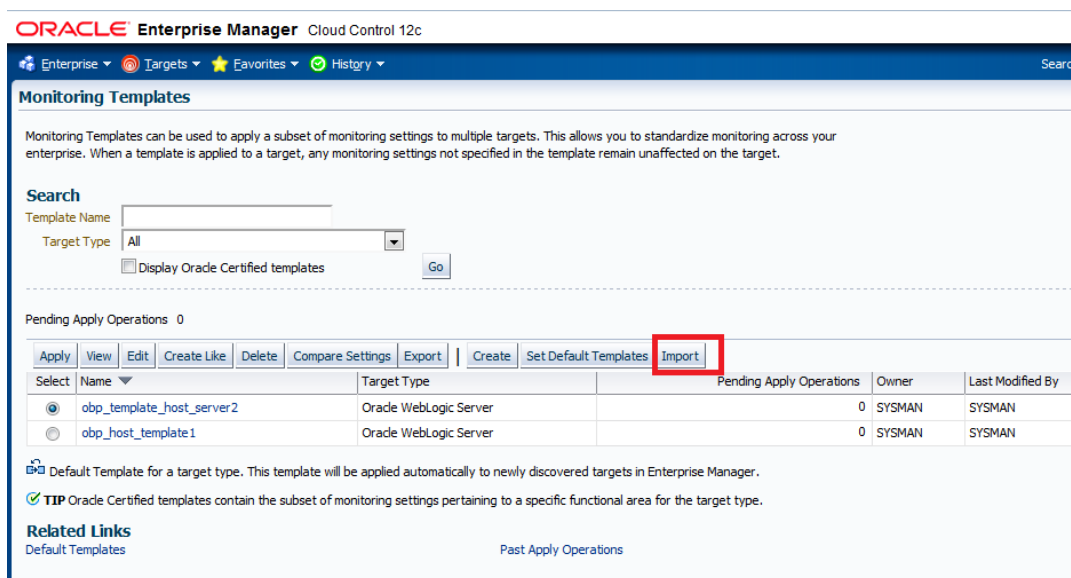

The **Monitoring Templates** page appears.

- c. Select the zip file and click **Import**, to import the template.

Location:

**Host template:** PATH/obp\_em\_view\_script/template\_files/host/

**UI template:** PATH/obp\_em\_view\_script/template\_files/ui

Figure 10–7 Import Template



**Note:** Create Monitoring Templates for Host and UI servers of an environment needs to be done only once for an EM machine.

## 10.2 Deploy OBP EM Plugin

Following are the steps to deploy OBP EM plugin in an environment:

### Step 1 Set the Environment Variables

1. Log on to the EM console.
2. Export the PATH to include OMS bin folder:

```
export PATH=$PATH: <Path to OEM12c>/Oms12C/oms/bin
```

For example:

```
export PATH=$PATH:/scratch/app/Oem12C/Oms12C/oms/bin
```

**3. Export the EMCLI command path:**

```
export EMCLI= $EMCLI: <Path to OEM12c>/Oms12C/oms/bin/emcli
```

For example:

```
export PATH=$PATH:/scratch/app/Oem12C/Oms12C/oms/bin/emcli
```

**4. Export the HS\_HOME:**

```
export HS_HOME= $HS_HOME: <Path to Enterprise Development Kit
Directory>/12.1.0.3.0_edk_partner/samples/plugins/HostSample/demo_
hostsystem/demo_hostsystem
```

For example:

```
export HS_HOME= $HS_HOME:/scratch/app/product/plugin_
dev/EnterpriseDevelopmentKit/12.1.0.3.0_edk_
partner/samples/plugins/HostSample/demo_hostsystem/demo_hostsystem
```

## Step 2 Deploy the Plugin in the EM

(scripts assume standard ports for the following: EM\_PORT=7802 AGENT\_PORT=3872)

**1. Navigate to the plugin script folder.**

For example:

```
/scratch/app/product/plugin_dev/EnterpriseDevelopmentKit/12.1.0.3.0_
edk_partner/samples/plugins/HostSample/demo_hostsystem/demo_
hostsystem/scripts
```

**2. If the plugin is already deployed in the EM, undeploy them from the agents and the EM.**

---

---

**Note:** This step can be performed only if the plugin is already deployed and a new or modified plugin needs to be deployed in the environment.

---

---

To undeploy the plugin from the agents, run the `undeploy_agent.sh`

```
./undeploy_agent.sh plugin_version host_name user_name(EM) password(EM)
env_name em_repos_sys_password
```

For example:

```
./undeploy_agent.sh 12.1.0.4.0 10.180.6.36 sysman welcome12c T04
welcome1
```

If the undeployment is unsuccessful, you can undeploy it manually as follows:

- a.** Navigate to Setup -> Extensibility -> Plug-ins.



Figure 10–8 Undeploy Plugin

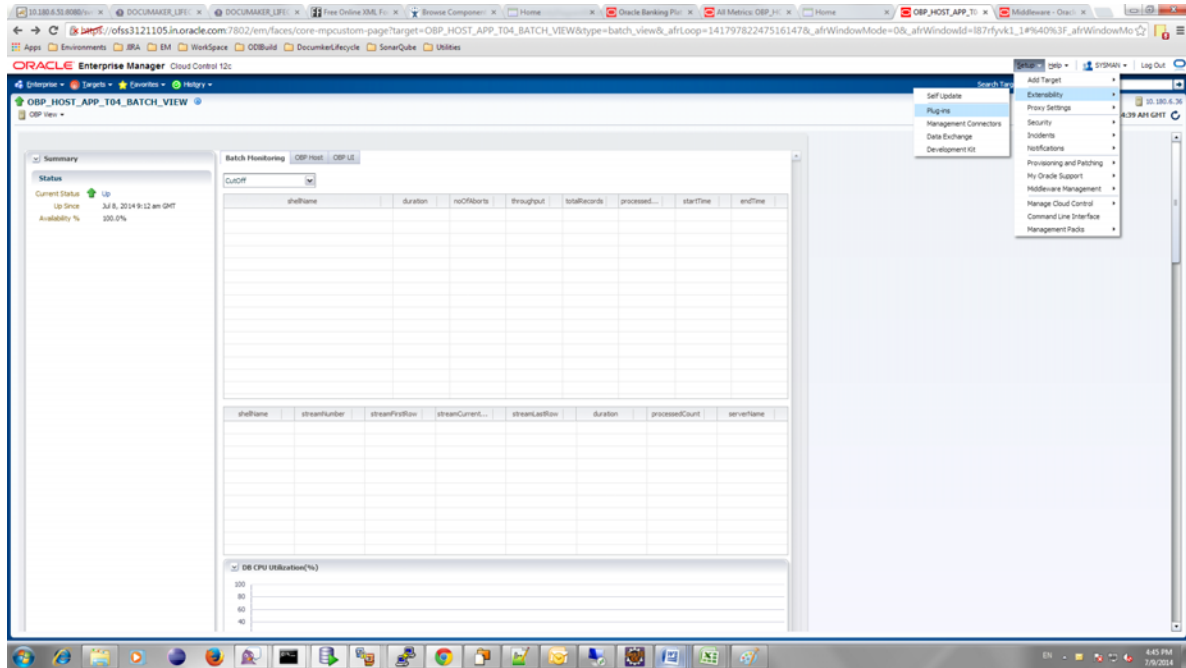


Figure 10–9 Undeploy Plugin - Select Management Agents



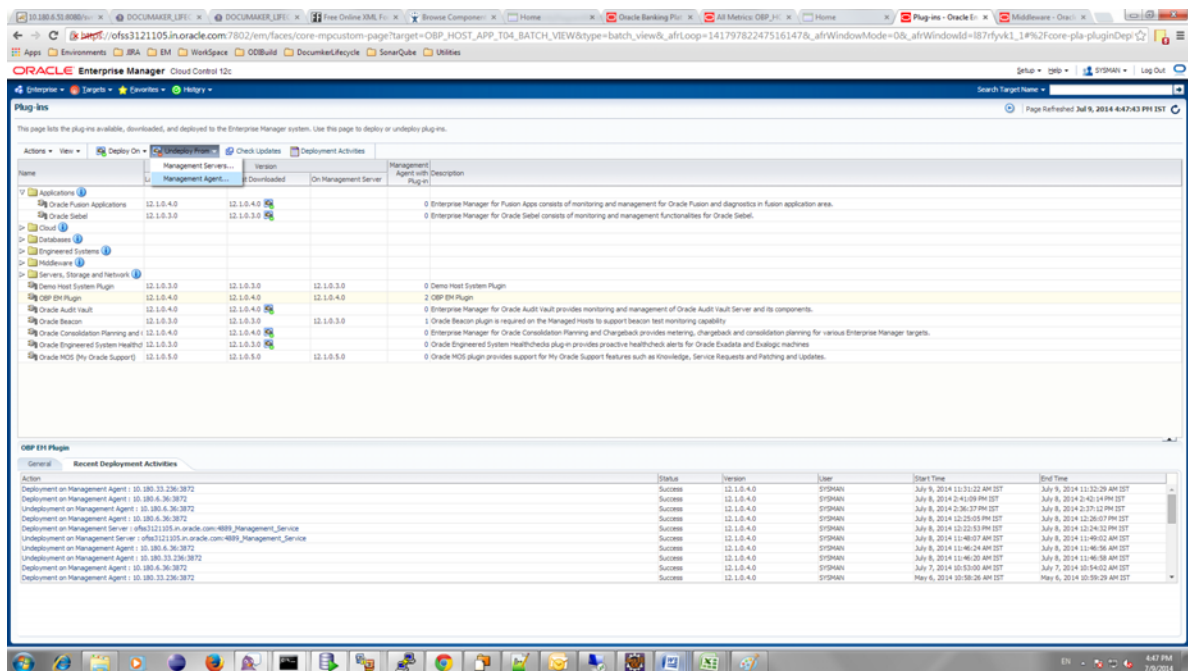


Figure 10–10 Undeploy Plugin - Click Add

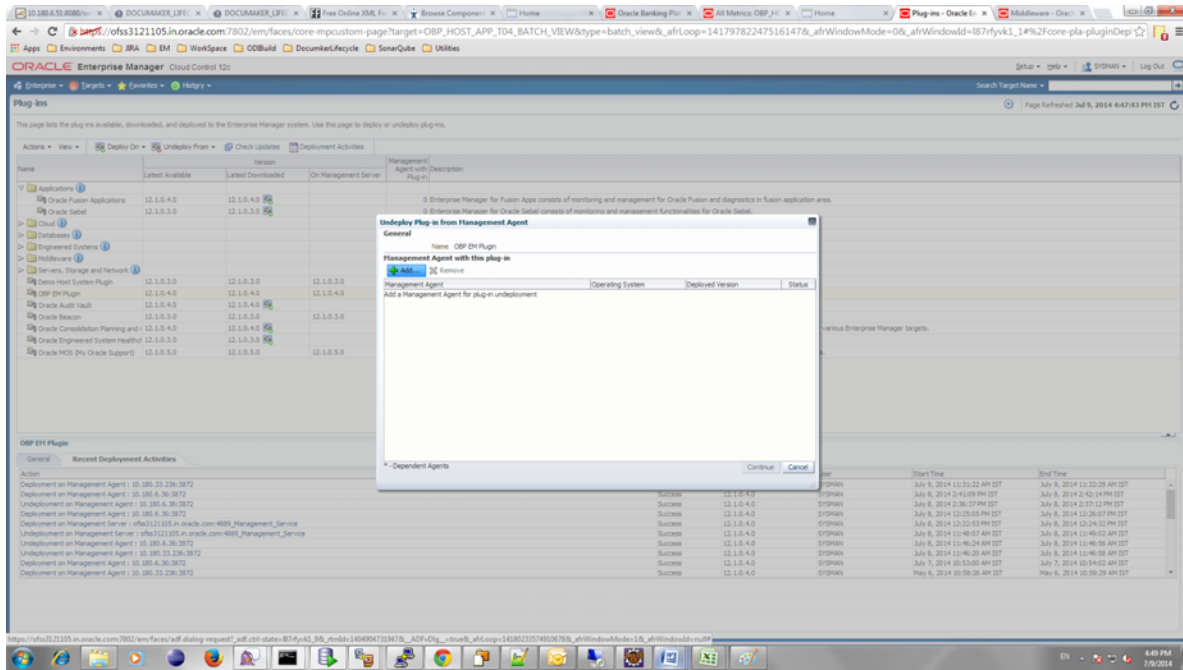

b. Select the agents and finish the undeployment.

Figure 10–11 Undeploy Plugin - Select Agent

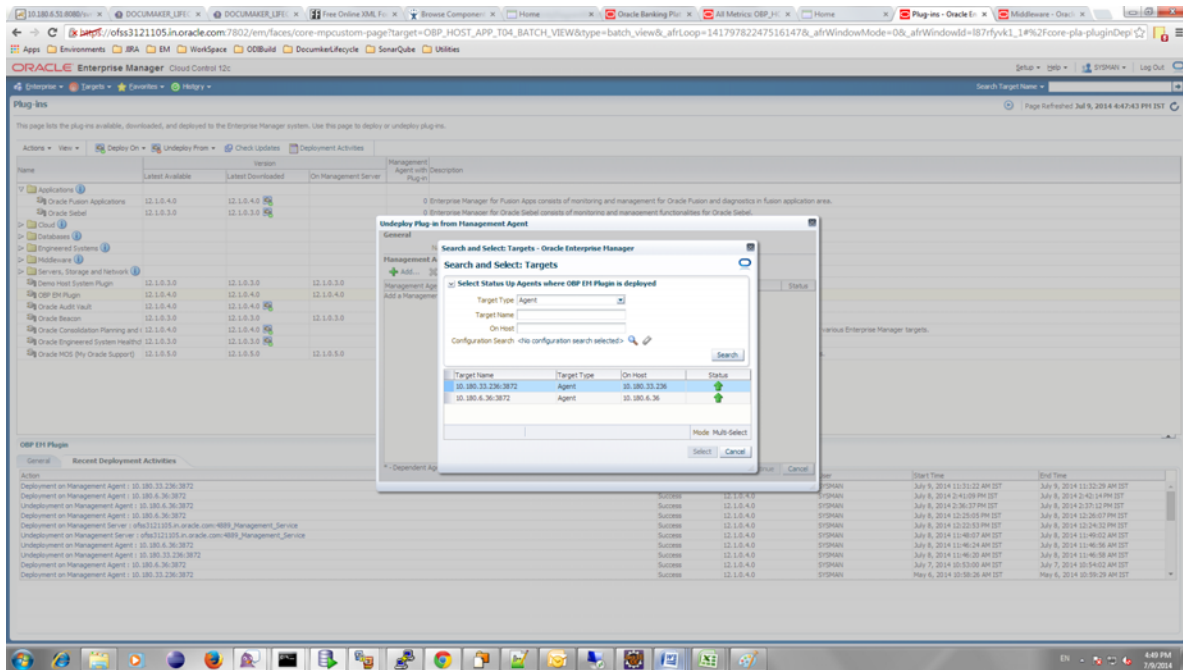

c. Run the `undeploy oms.sh` script to undeploy the plugin from the EM.  
`./undeploy oms.sh plugin_version user_name(EM) password(EM) em_repos_sys_password`

For example:

```
./undeploy_oms.sh 12.1.0.4.0 sysman welcome12c welcome1]
```

3. To deploy the plugin to the EM and agents, follow the below steps:

1. Run the `deploy_oms.sh` script.

```
./deploy_oms.sh plugin_version username(EM) password(EM) em_repos_
sys_password
```

For example:

```
./deploy_oms.sh 12.1.0.4.0 sysman welcome12 welcome1]
```

2. Run the `deploy_agent.sh` script.

```
./deploy_agent.sh plugin_version agent_host_name username(EM)
password(EM) CPU_NUMBER(host) host_db_machine_name host_db_port
host_db_sid host_db_username host_db_password env_name em_repos_
sys_password UI_IP SOA_IP OID_IP ext3
```

For example:

```
./deploy_agent.sh 12.1.0.4.0 10.180.6.36 sysman welcome12c
10.180.6.36 10.180.84.34 1521 OBPTEST obpiut04rd obpiut04rd T04
welcome1 10.180.33.49 10.180.84.92 10.180.6.100 ext3
```

## 10.3 Create Services and Aggregate Service

The script is for creation of monitoring view in Enterprise Manager.

Monitoring services of all the servers of an environment (Host, Presentation, SOA, OID, and so on) are created, after the successful execution of the script.

The monitoring services show the performance metric for the respective servers. For example, CPU Utilization, JVM Memory-Heap Memory Usage, and so on.

Host and Presentation services contain OBP specific metric, which gives the Average Processing Time of various OBP services.

List of these OBP services are present in `/obp_em_view_script/metric_extensions/metric_extensions_list_host.txt` for Host server and `/obp_em_view_script/metric_extensions/metric_extensions_list_ui.txt` for Presentation server.

If any service from the list is not to be monitored, it can be ignored by placing '#' in the beginning.

Logs are generated in `obp_em_view_script/logs/em_view_log.txt`.

### Using Script

The folder `obp_em_view_script` has to be copied to the OMS (EM Server).

### 10.3.1 Verify SOA keys for Service Creation of SOA Process

Check the SOA composites for inclusion as keys. Following are the steps to be performed:

1. Navigate to the Middleware screen in EM.
2. Select the SOA middleware added.



---

**Note:** You can add a few composites. After the service is created by the script, the rest of the composites can be added to the service by just selecting them from the screen.

---

- Open the `obp_em_view_script/scripts/generate_key_components_soa.sh` file and go to line 63.

```
"key_comp="/$domain_name/base_domain/${server_category}_
server1/default/com.ofss.fc.workflow.process.CreateDepositAccount
[1.0]:oracle_soa_composite"
```

- Check the entry of the composite key namely, `com.ofss.fc.workflow.process.CreateDepositAccount[1.0]` in the composite list screen of EM. If the entry is not present, replace the entry in the file with any one which is present in the list on the EM screen.

---

**Note:** The above entry should not be present in the `obp_em_view_script/temp_files/wlsoutput_soa.properties` file.

---

**Figure 10–14 Add Composite Names**

```

43 then
44     echo "INFO: Built domain_ip: " $domain_ip >> ../logs/em_view_log.txt
45 fi
46
47 #building domain name
48 domain_name=${server_category_upper}${domain_ip}_base_domain
49 echo $domain_name
50
51 if [[ $log_level == debug ]] ;
52 then
53     echo "INFO: Built domain_name: " $domain_name >> ../logs/em_view_log.txt
54 fi
55
56 #differentiating cluster name
57 cluster_name="cluster1"
58
59 #I/PT02_SQA_10_180_4_64_base_domain/base_domain/soa_server1/default/
60 #key components file name different for each server
61
62 key_components_file_name=../temp_files/wlsoutput_${server_category}.properties
63 key_comp=${domain_name/base_domain/${server_category}_server1/default/com.ofss.fc.workflow.process.CreateDepositAccount [1.0]:oracle_soa_composite"
64 out $key_components_file_name| while read LINE
65 do
66     key_comp=${key_comp}/${domain_name/base_domain/${server_category}_server1/default/$LINE:oracle_soa_composite"
67     echo $key_comp > ../temp_files/keys_${server_category}.txt
68 done
69
70 #key_components_file_name=../temp_files/wlsoutput_${server_category}.properties
71 #echo $key_components_file_name
72 #key_comp=${domain_name/base_domain/${server_category}_server1/default/com.ofss.fc.appoval.instructionsetupapi_setupinstructions [1.0]:oracle_soa_composite"
73 #echo $key_comp
74 #cat $key_components_file_name| while read LINE
75 #do
76 #echo $LINE
77 #echo "ITS WORKING"
78 #key_comp=${key_comp}/${domain_name/base_domain/${server_category}_server1/default/$LINE:oracle_soa_composite"
79 #echo $key_comp > ../temp_files/keys_${server_category}.txt
80 #done
81
82 if [[ $log_level == debug ]] ;
83 then
84     echo "SCRIPT INFO: End of generate_key_components_soa.sh">> ../logs/em_view_log.txt
85 fi
86     echo "INFO: Generation of key components of service complete for: " $3 >> ../logs/em_view_log.txt
87 fi

```

## 10.3.2 Execute Scripts

Following is the procedure to execute scripts:

- Log in to the EM console.
- Export the PATH to include OMS bin folder.

```
export PATH=$PATH:"Path to OEM12c"/Oms12c/oms/bin
```

For example:

```
export PATH=$PATH:/scratch/app/Oem12c/Oms12c/oms/bin
```




OBP\_T07\_HOST\_Service

To configure the systems manually, perform the following steps:


- 1. Select the service to configure.

Figure 10-16 Manual Configuration - Select Service

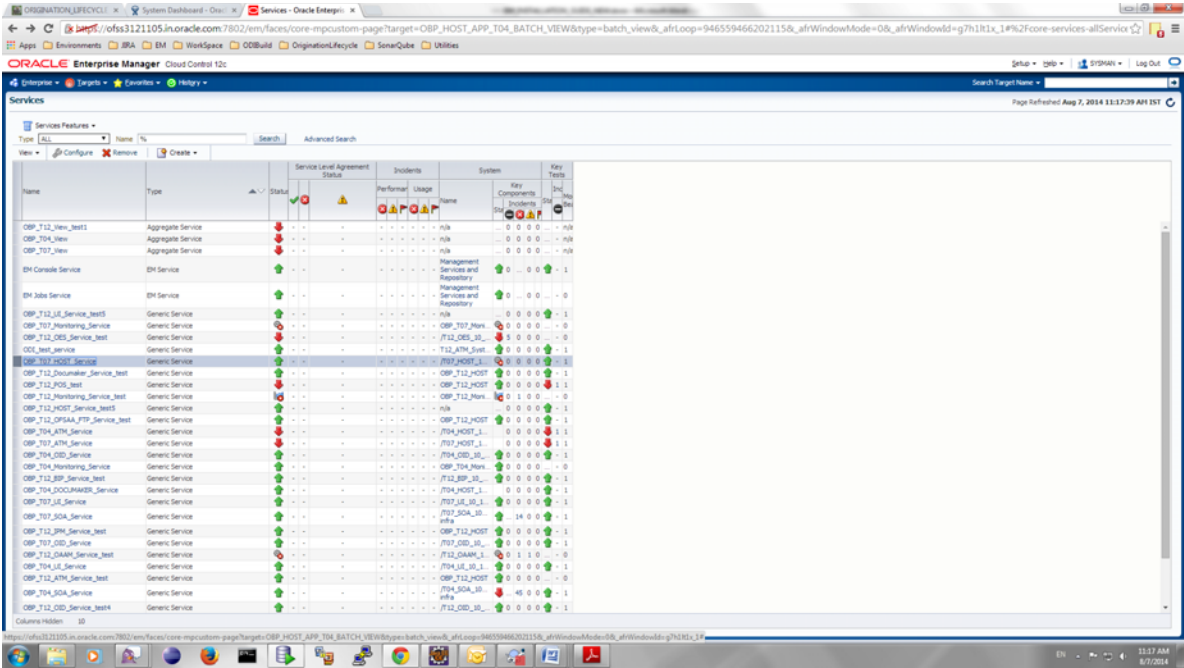

- 2. Navigate to Monitoring Configuration -> System Configuration.


Figure 10-17 Manual Configuration - Navigate to System Configuration

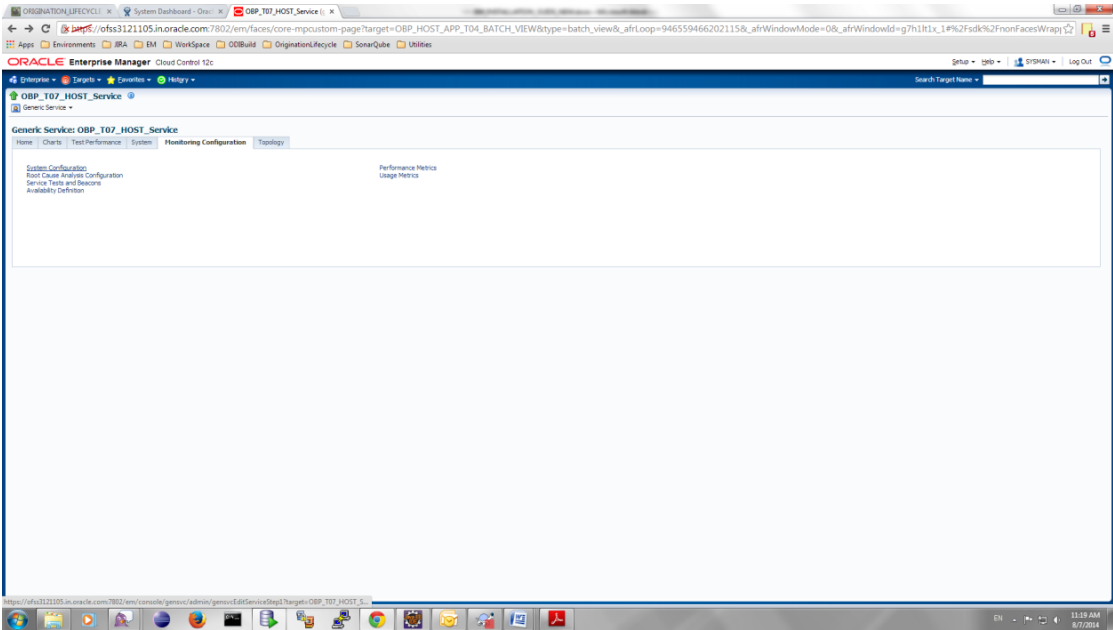

- 3. Check or uncheck the systems for inclusion or exclusion in the service.



Figure 10–18 Manual Configuration - Inclusion or Exclusion

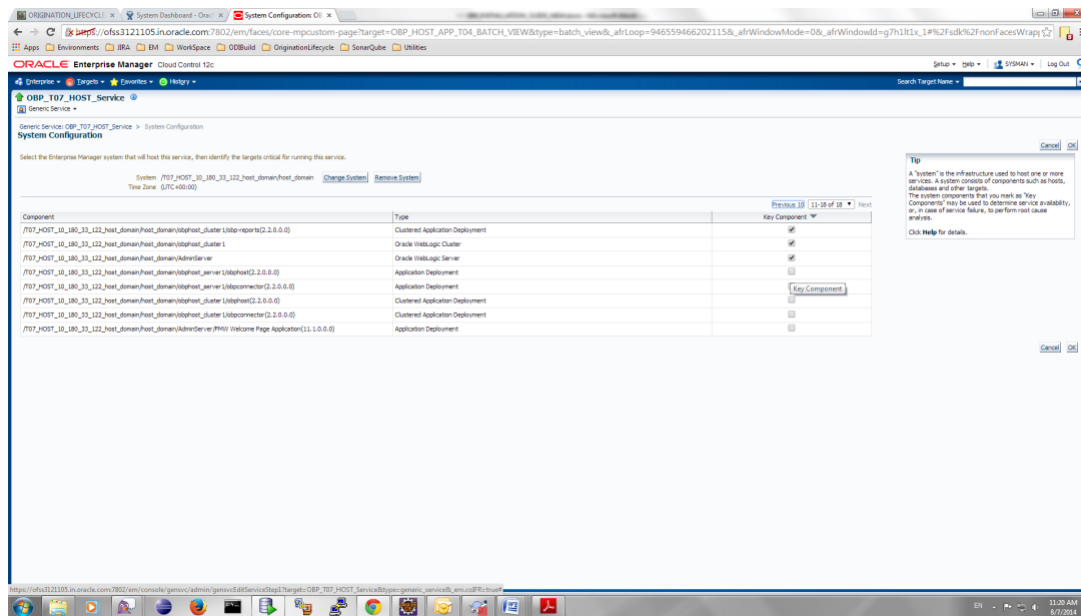

4. Click OK.
5. Click Yes on confirmation.

---

**Note:** You can perform similar steps to configure the systems for SOA, UI, and OID servers.

---



---

---

## Post Installation Verification


This chapter lists the steps required to verify the Oracle Banking Platform solution installation.

### 11.1 UI Domain Verification

To verify the UI domain installation:


1. Start the UI domain Admin and Managed servers.
2. In the WebLogic console (<UI\_IP>:<UI\_ADMIN\_PORT>/console), navigate to the **Summary of Deployments** page.
3. Verify that the **Status** of the following Oracle Banking Platform libraries and applications is *Active*.
  - obp.ui.domain
  - obp.host.domain
  - obp.thirdparty.domain
  - obp.fusion.internal
  - com.ofss.ui.view
  - obpuiconnector
  - obpuidms

Figure 11–1 UI WebLogic Console

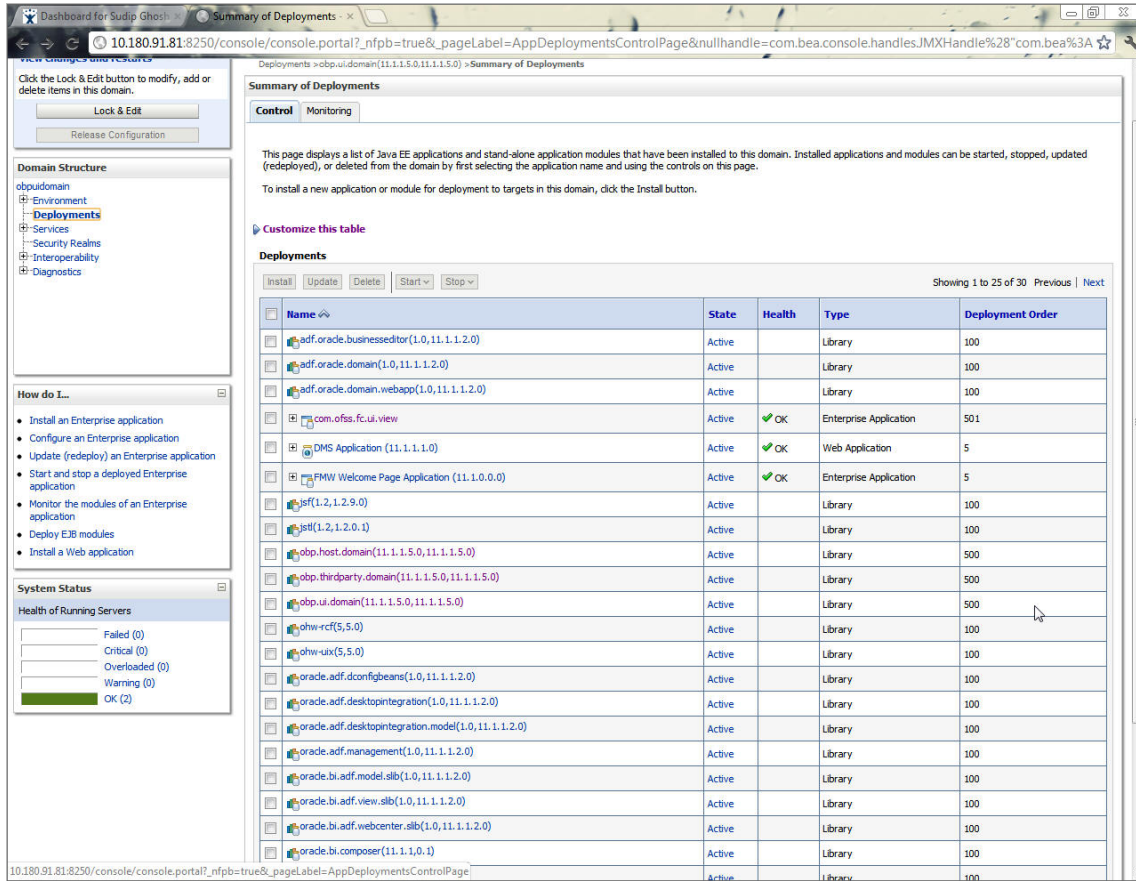

4. In em console (<UI\_IP>:<UI\_ADMIN\_PORT>/em), check the status of:
  - Cluster
  - Managed Servers
  - Applications

Figure 11–2 UI EM Console Status Check

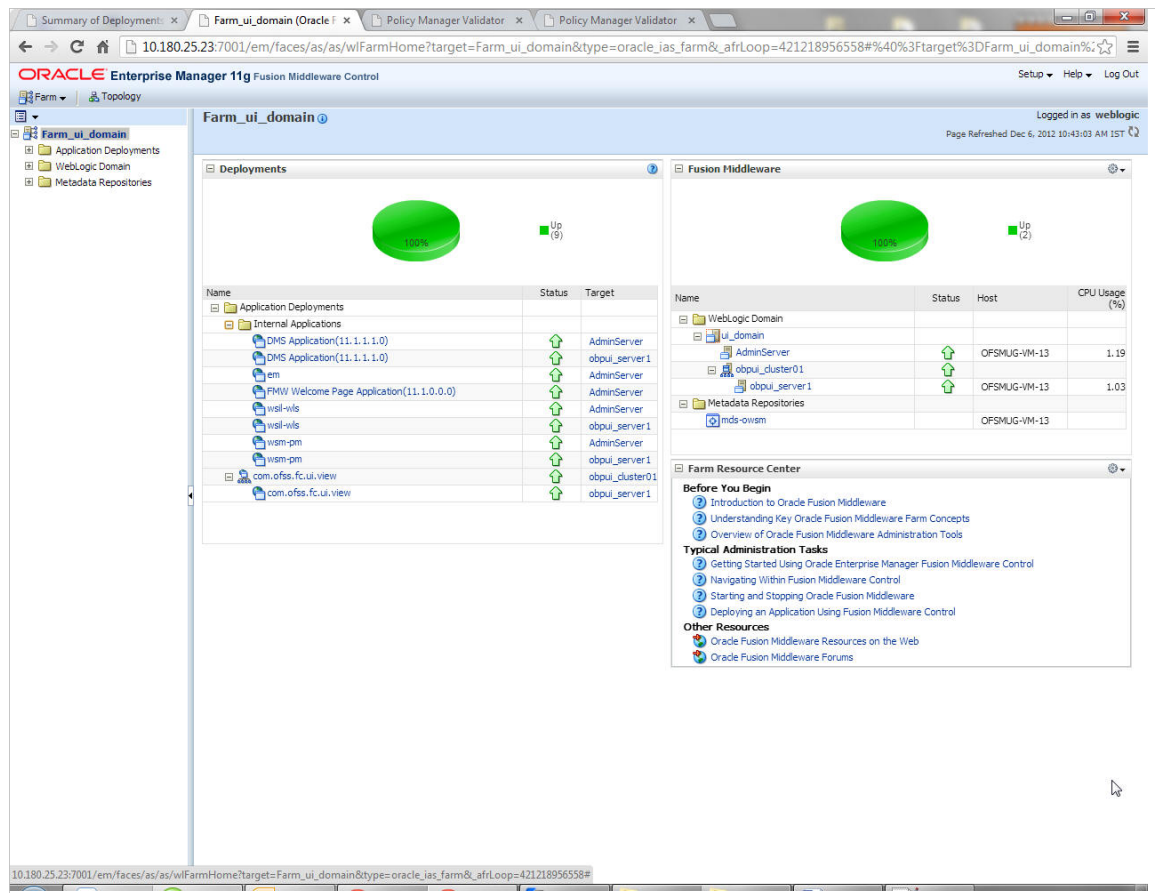

- In (<UI\_IP>:<UI\_ADMIN\_PORT>/wsm-pm/validator) and (<UI\_IP>:<UI\_MANAGED\_PORT>/wsm-pm/validator) screens, all policies must appear.

**Figure 11-3 UI Admin wsm-pm Validator**

Policy Manager Status: Operational

**Policies (88)**

Name	Latest Version	Description
oracle/binding_authorization_denyall_policy	1	This policy is a special case of simple role based authorization policy based upon the authenticated Subject. This policy denies all users with any roles. This policy should follow an authentication policy where the Subject is established. This policy can be attached to any SOAP-based endpoint.
oracle/binding_authorization_permitall_policy	1	This policy is a special case of simple role based authorization policy based upon the authenticated Subject. This policy permits all users with any roles. This policy should follow an authentication policy where the Subject is established. This policy can be attached to any SOAP-based endpoint.
oracle/binding_permission_authorization_policy	1	This policy is a special case of simple Permission based authorization policy based upon the authenticated Subject. This policy checks if the subject has permission to invoke any operation on a webservice. This policy should follow an authentication policy where the Subject is established. This policy can be attached to any SOAP-based endpoint.
oracle/component_authorization_denyall_policy	1	This policy is a special case of simple role based authorization policy based upon the authenticated Subject. This policy denies all users with any roles. This policy should follow an authentication policy where the Subject is established. This policy can be attached to any SCA component.
oracle/component_authorization_permitall_policy	1	This policy is a special case of simple role based authorization policy based upon the authenticated Subject. This policy checks if the subject has permission to invoke a given action on a resource. This policy should follow an authentication policy where the Subject is established. This policy can be attached to any SCA component.
oracle/component_permission_authorization_policy	1	This policy is a special case of simple permission based authorization policy based upon the authenticated Subject. This policy checks if the subject has permission to invoke operation on a webservice. This policy should follow an authentication policy where the Subject is established. This policy can be attached to any SCA component.
oracle/log_policy	1	This policy causes the request, response, and fault messages to be sent to a message log.
oracle/no_addressing_policy	1	This policy facilitates the disabling of a globally attached WS Addressing policy.
oracle/no_authentication_client_policy	1	This policy facilitates the disabling of a globally attached authentication policy. This will include disabling that whole global policy containing any other assertions in addition to the authentication assertion.
oracle/no_authentication_service_policy	1	This policy facilitates the disabling of a globally attached authentication policy. This will include disabling that whole global policy containing any other assertions in addition to the authentication assertion.
oracle/no_authorization_component_policy	1	This policy facilitates the disabling of a globally attached authorization policy. This will include disabling that whole global policy containing any other assertions in addition to the authorization assertion.
oracle/no_authorization_service_policy	1	This policy facilitates the disabling of a globally attached authorization policy. This will include disabling that whole global policy containing any other assertions in addition to the authorization assertion.
oracle/no_messageprotection_client_policy	1	This policy facilitates the disabling of a globally attached message protection policy. This will include disabling that whole global policy containing any other assertions in addition to the messageprotection assertion.

Figure 11–4 UI Managed wsm-pm Validator

Policy Manager Status: Operational

**Policies (88)**


Name	Latest Version	Description
oracle/binding_authorization_denyall_policy	1	This policy is a special case of simple role based authorization policy based upon the authenticated Subject. This policy denies all users with any roles. This policy should follow an authentication policy where the Subject is established. This policy can be attached to any SOAP-based endpoint.
oracle/binding_authorization_permitall_policy	1	This policy is a special case of simple role based authorization policy based upon the authenticated Subject. This policy permits all users with any roles. This policy should follow an authentication policy where the Subject is established. This policy can be attached to any SOAP-based endpoint.
oracle/binding_permission_authorization_policy	1	This policy is a special case of simple Permission based authorization policy based upon the authenticated Subject. This policy checks if the subject has permission to invoke any operation on a webservice. This policy should follow an authentication policy where the Subject is established. This policy can be attached to any SOAP-based endpoint.
oracle/component_authorization_denyall_policy	1	This policy is a special case of simple role based authorization policy based upon the authenticated Subject. This policy denies all users with any roles. This policy should follow an authentication policy where the Subject is established. This policy can be attached to any SCA component.
oracle/component_authorization_permitall_policy	1	This policy is a special case of simple role based authorization policy based upon the authenticated Subject. This policy checks if the subject has permission to invoke a given action on a resource. This policy should follow an authentication policy where the Subject is established. This policy can be attached to any SCA component.
oracle/component_permission_authorization_policy	1	This policy is a special case of simple permission based authorization policy based upon the authenticated Subject. This policy checks if the subject has permission to invoke operation on a webservice. This policy should follow an authentication policy where the Subject is established. This policy can be attached to any SCA component.
oracle/log_policy	1	This policy causes the request, response, and fault messages to be sent to a message log.
oracle/no_addressing_policy	1	This policy facilitates the disabling of a globally attached WS Addressing policy.
oracle/no_authentication_client_policy	1	This policy facilitates the disabling of a globally attached authentication policy. This will include disabling that whole global policy containing any other assertions in addition to the authentication assertion.
oracle/no_authentication_service_policy	1	This policy facilitates the disabling of a globally attached authentication policy. This will include disabling that whole global policy containing any other assertions in addition to the authentication assertion.
oracle/no_authorization_component_policy	1	This policy facilitates the disabling of a globally attached authorization policy. This will include disabling that whole global policy containing any other assertions in addition to the authorization assertion.
oracle/no_authorization_service_policy	1	This policy facilitates the disabling of a globally attached authorization policy. This will include disabling that whole global policy containing any other assertions in addition to the authorization assertion.
oracle/no_messageprotection_client_policy	1	This policy facilitates the disabling of a globally attached message protection policy. This will include disabling that whole global policy containing any other assertions in addition to the messageprotection assertion.

## 11.2 Host Domain Verification

To verify the Host domain installation:

1. Start the Host domain Admin and Managed servers.
2. Navigate to the **Summary of Deployments** page.
3. Verify that the **Status** of the following Oracle Banking Platform libraries and applications is *Active*.
  - obp.host.app.domain
  - obp.thirdparty.app.domain
  - obp-reports
  - obp-webservices
  - obpchannels
  - obphost
  - obphostconnector
  - obphostdms
  - obpmessaging

Figure 11–5 Host WebLogic Console

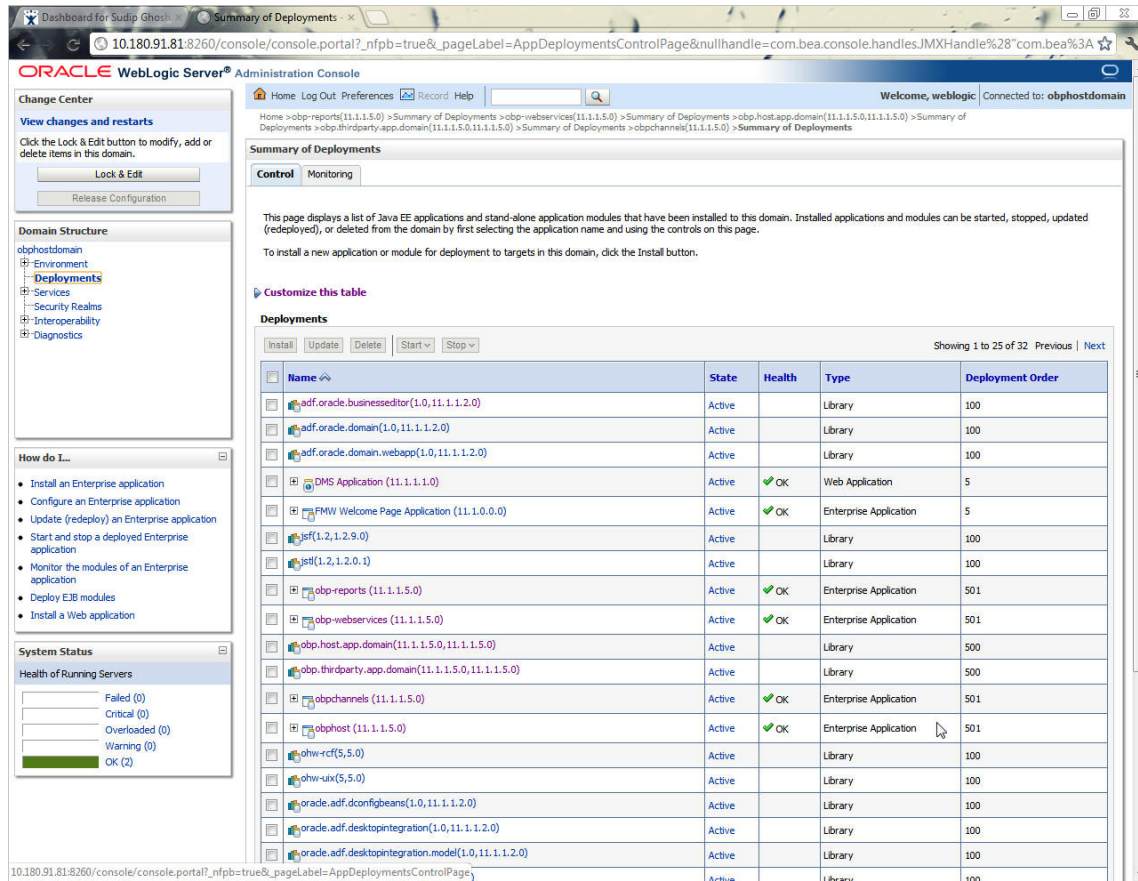

Additionally, the installer can verify the following:

- **JMS Resources and Security Credentials**  
Verify the creation of JMS resources Using admin console.  
Verify security credential mappings for resource adapter under obphost.
- **OID Integration**  
Verify that the users and groups are created under **Security --> Myrealms --> Users And Groups**. This is one of the indicators of successful OID integration.
- **SMS Policy Seeding**  
Verify from logs under \${HOST\_TARGET}/PolicyStoreSetup/logs to ensure policy seeding was complete.
- EM and OWSM should also be verified in host as in UI.

## 11.3 SOA Domain Verification

To verify the SOA domain installation:

1. Start the SOA domain Admin and Managed servers (SOA and human task).
2. Navigate to the **Summary of Deployments** page.



3. Verify that the **Status** of the following Oracle Banking Platform libraries and human task files with .ear extension is *Active*.
  - obp.ui.domain
  - obp.host.domain
  - obp.thirdparty.domain
4. Also verify that the standard SOA application soa-infra is in *Active* state.

**Figure 11–6 SOA WebLogic Console**

The screenshot shows the SOA WebLogic Console interface. On the left, there are panels for 'How do I...' and 'System Status'. The main area displays a table of deployed applications. The table columns include Application Name, Status, Health, Type, and Size. The status of the applications is as follows:

Application Name	Status	Health	Type	Size
adf.oracle.domain.webapp(1.0,11.1.1.2.0)	Active		Library	100
AqAdapter	New		Resource Adapter	324
b2bui	New		Enterprise Application	313
BPMComposer	New		Enterprise Application	384
com.ofss.fc.workflow.ui.brop	Active	OK	Enterprise Application	100
com.ofss.fc.workflow.ui.common.approval	Active	OK	Enterprise Application	100
com.ofss.fc.workflow.ui.dds	Active	OK	Enterprise Application	100
com.ofss.fc.workflow.ui.loans	Active	OK	Enterprise Application	100
com.ofss.fc.workflow.ui.Origination	Active	OK	Enterprise Application	100
com.ofss.fc.workflow.ui.pmu	Active	OK	Enterprise Application	100
composer	New		Enterprise Application	315
DbAdapter	New		Resource Adapter	322
DefaultToDoTaskFlow	New		Enterprise Application	314
DMS Application (11.1.1.1.0)	Active	OK	Web Application	5
em	Active	OK	Enterprise Application	400
email	Active		Library	100
emas	Active		Library	100
encore	Active		Library	100
FileAdapter	New		Resource Adapter	321
FMW Welcome Page Application (11.1.0.0.0)	Active	OK	Enterprise Application	5
FtpAdapter	New		Resource Adapter	325
JmsAdapter	New		Resource Adapter	323
jsf(1.2,1.2.9.0)	Active		Library	100
jsf(1.2,1.2.0.1)	Active		Library	100
MQSeriesAdapter	New		Resource Adapter	327
obp.host.domain(11.1.1.5.0,11.1.1.5.0)	Active		Library	100
obp.thirdparty.domain(11.1.1.5.0,11.1.1.5.0)	Active		Library	100
obp.ui.domain(11.1.1.5.0,11.1.1.5.0)	Active		Library	100
ohw-rcf(5.5.0)	Active		Library	100
ohw-rcf(5.5.0)	Active		Library	100





---

---

## Errors and Remedies

This chapter provides information on troubleshooting to help diagnose and remedy some of the problems encountered during installation of the Oracle Banking Platform.

### 12.1 Oracle Banking Platform Domain Installation

In general, any environmental condition such as a network error that may lead to a halt in the installation is evident to you on the console itself. You can additionally inspect WLST logs created in logs directory under middleware for any anomalies.

### 12.2 Oracle Banking Platform Security Policy Seeding

For monitoring Oracle Banking Platform application security policy seeding, you can check the logs generated in \$UI\_TARGET/PolicyStoreSetup/logs.

### 12.3 Oracle Banking Platform Domain Post Installation

This section lists various log files that assist in troubleshooting domain post installation as follows:

#### **obp-\* logs**

During post installation in order to monitor errors, if any, you can check the obp-\* logs created in the Oracle Banking Platform WebLogic domain. These logs contain adequate tracing information required to understand the current execution point of the script. This facilitates to determine the various configurations that were executed and those that need due action.

#### **WLST Logs**

You can inspect WLST logs created in logs directory under middleware, such as the logs at the path '/oracle/app/product/fmw/logs', for errors, if any, in either domain creation or post installation.

#### **WebLogic Admin Server Logs and stderr file**

The script does domain level configurations that require several automated reboots of admin server, which can be monitored by checking the WebLogic admin server logs and stderr file created under obp-domain-dir/servers/AdminServer/stderr.log.

For instance, consider a scenario of Oracle Banking Platform Host installation in which once the post install script for Oracle Banking Platform host has secured itself against a LDAP (OID/OVD) it proceeds to restart the Oracle Banking Platform Host domain admin server to produce these changes. During this if due to a momentary network

failure the host machine is unable to make a connection to LDAP then the admin server would fail to start. This will result in the post install script to abruptly abort throwing a subsequent script error (again which might not be conclusive enough to point out the root cause). The 'obp-\*' logs created in the Oracle Banking Platform Host domain would indicate an incomplete attempt by post install script to start the admin server.

You can check the admin server logs (to find why the admin server could not start) which will ultimately yield out the actual reasons (in this case the reason being host machine was unable to connect to LDAP).


### **stderr log, WebLogic Domain Managed Server logs, OFSS logs**

Once the post install script is completed successfully, you can start the domain servers and enter a dummy transaction to check the system correctness. If you face an error you can inspect the stderr log, the WebLogic domain managed server logs as well as the ofss logs under middleware directory/obpinstall/logs.

## 12.4 Error on First Log in

In the first log in after installation, the following page may appear:

**Figure 12–1 Error on First Log In**

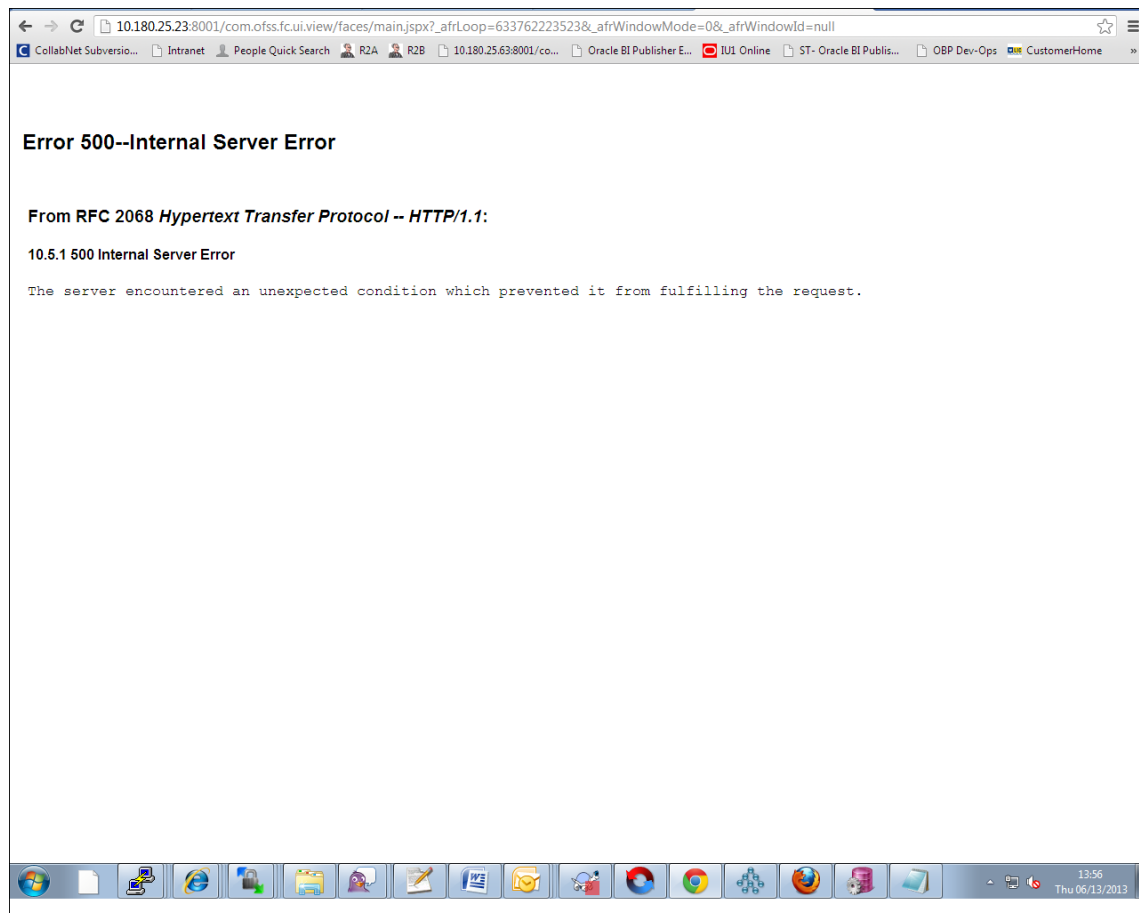

In this case, remove the part of the url after '/main.jspx', and then hit the rest of the url (Example: <https://10.180.25.23:8001/com.ofss.fc.ui.view/faces/main.jspx>) again.

## 12.5 Log in Issues

If there is a problem during logging in the main page, you can check whether the home branch and business unit of the user in OID are the same with the Host DB table. Use the following query to verify it in database:

```
select * from flx_cs_branches_b;
select * from flx_me_business_unit_b;
```

If there is mismatch between the database and OID, make change in OID to match with the database.

## 12.6 SOA Setup in Cluster

This section explains the error that can be encountered in SOA setup in Cluster, and its resolution.

### 12.6.1 "COMPONENTTYPE": invalid identifier error

Due to one of the one-off patches for SOA applied during the OBP installation, in SOA cluster environment, the following error might be seen in SOA server logs.

```
Internal Exception: java.sql.SQLSyntaxErrorException: ORA-00904:
"COMPONENTTYPE": invalid identifier
```

Though this is not a fatal kind of exception, it can be resolved by adding one more column **componenttype** of size **10** with **char** type in **soainfra** schema for table **cluster\_master**.

For example on Oracle database user needs to run the following command on soainfra schema:

```
alter table cluster_master add (componenttype varchar2(10));
```

## 12.7 XText

For enabling InstaText feature on the Oracle banking Platform Dashboard, the XText libraries must be downloaded from

[http://download.itemis.com/distros/eclipse-SDK-4.2-Xtext-2.3.0-linux-gtk-x86\\_64.tar.gz](http://download.itemis.com/distros/eclipse-SDK-4.2-Xtext-2.3.0-linux-gtk-x86_64.tar.gz) or

<http://download.itemis.com/distros/eclipse-SDK-4.2-Xtext-2.3.0-linux-gtk.tar.gz>.

The following jars from the plugins folder (inside the tar file) must be copied to middleware lib folder:

- com.google.guava\_10.0.1.v201203051515.jar
- com.google.inject\_3.0.0.v201203062045.jar
- de.itemis.xtext.antlr\_2.0.0.v201108011202.jar
- javax.inject\_1.0.0.v20091030.jar
- org.antlr.runtime\_3.2.0.v201101311130.jar
- org.apache.log4j\_1.2.15.v201012070815.jar
- org.eclipse.emf.common\_2.8.0.v20120606-0717.jar
- org.eclipse.emf.ecore.xmi\_2.8.0.v20120606-0717.jar

- org.eclipse.emf.ecore\_2.8.0.v20120606-0717.jar
- org.eclipse.emf.mwe.core\_1.2.1.v201206110920.jar
- org.eclipse.emf.mwe.utils\_1.2.1.v201206110920.jar
- org.eclipse.emf.mwe2.runtime\_2.3.0.v201206110920.jar
- org.eclipse.xtend2.lib\_2.3.0.v201206120633.jar
- org.eclipse.xtext.builder\_2.3.0.v201206120633.jar
- org.eclipse.xtext.common.types.ui\_2.3.0.v201206120633.jar
- org.eclipse.xtext.common.types\_2.3.0.v201206120633.jar
- org.eclipse.xtext.ecore\_2.3.0.v201206120633.jar
- org.eclipse.xtext.ui.codetemplates.ui\_2.3.0.v201206120633.jar
- org.eclipse.xtext.ui\_2.3.0.v201206120633.jar
- org.eclipse.xtext.util\_2.3.0.v201206120633.jar
- org.eclipse.xtext.xbase.lib\_2.3.0.v201206120633.jar
- org.eclipse.xtext.xbase\_2.3.0.v201206120633.jar
- org.eclipse.xtext\_2.3.0.v201206120633.jar

---

---

## Uninstalling the Application

This chapter explains the process of uninstalling the Oracle Banking Platform.

### 13.1 Manual Uninstall

Currently an installed Oracle Banking Platform WebLogic domain can be uninstalled manually by removing following directories:

- Manually delete WebLogic domain (Middleware\_Home/user\_projects/domains) created from obpinstall template.
- Clean up middleware directory for any files or folders containing obp in their names (simply run `rm -rf *obp*` under middleware directory).
- For uninstalling any of the Oracle Banking Platform related database schemas run the RCU utility and choose the **Drop** option.

