Configuring Internet Explorer Oracle FLEXCUBE Investor Servicing Release 12.0.4.7.11 [December] [2017]



Table of Contents

1.	CO	NFIGURING INTERNET EXPLORER	1
	1.1	CONFIGURING INTERNET OPTIONS	1
	1.2	CREATING SHORTCUT FOR ORACLE FLEXCUBE APPLICATION BROWSER WITH - NOMERGE PARAMETER	5
	1.3	SETTING COMPATIBILITY VIEW (IE 8 ONWARDS)	7
	1.4	SUPPRESSING COMPATIBILITY VIEW REFRESH	8
	1.5	CLEARING THE CACHE	9
	1.6	SUPPRESSING CACHING	.10
	1.7	Settings for Trusted Sites	
	1.8	Settings for Pop-up Blocker	.12
	1.9	INTERNET EXPLORER 11 SETTINGS	.12
	1.10	BROWSER BEHAVIOR	.12



1. Configuring Internet Explorer


Oracle FLEXCUBE does not support Microsoft Internet Explorer Beta, Partner Build or a Release Candidate. It must be the Final build of Microsoft Internet Explorer. You can view the version information from the Help menu of Internet Explorer. Select 'About Internet Explorer' from the Help menu.



1.1 Configuring Internet Options

In order to run Oracle FLEXCUBE, you need to configure the internet options as follows:

1. Start Internet Explorer. Go to Tools > Internet Options. The 'Internet Options' screen is displayed.

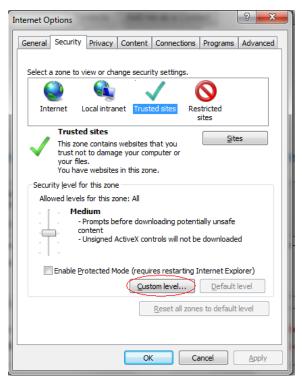

2. Under 'Security' tab, select 'Internet' and click 'Custom Level'. The security settings are displayed.

Security Settings - Local Intranet Zone	x
Settings	
Prompt	<u> </u>
Navigate windows and frames across different domains	
 Disable 	
Enable	
Prompt	
Render legacy filters	
 Disable 	
Enable	
Submit non-encrypted form data	
 Disable 	
Enable	
Prompt	
Use Pop-up Blocker	
 Disable 	
Enable	_
1 Hos CmartCroson Filter	Ť
*Takes effect after you restart your computer	
Reset custom settings	
Reset to: Medium-low (default)	
OK Canc	el

3. Select 'Enable' for all options except for 'Use Pop-up Blocker'. Click 'OK'.

4. Repeat the above steps for the zone 'Local Intranet'.

Internet Options
General Security Privacy Content Connections Programs Advanced
Select a zone to view or change security settings.
🗏 🔮 💁 🗸 🚫
Internet Local intranet Trusted sites Restricted sites
Local intranet
This zone is for all websites that are Sites found on your intranet.
Security level for this zone
Allowed levels for this zone: All
Appropriate for websites on your local network (intranet)
Enable Protected Mode (requires restarting Internet Explorer)
<u>Custom level</u> <u>D</u> efault level
Reset all zones to default level
OK Cancel Apply

5. Once you have configured the Internet and Local Intranet options, click 'Apply'.


6. Once these settings are done, go to 'Advanced' tab and check the box 'Use JRE (Version) for appletscore.com (requires restart)'.

Internet Options	?	×
General Security Privacy Content Connections Programs	Advance	d
Settings		
 Accelerated graphics Use software rendering instead of GPU rendering* Accessibility Always expand ALT text for images Enable Caret Browsing for new windows and tabs Move system caret with focus/selection changes Play system sounds Reset text size to medium for new windows and tabs Reset zoom level for new windows and tabs Browsing Always record developer console messages Close unused folders in History and Favorites* V Disable script debugging (Internet Explorer) 	4 III	
Disable script debugging (Other) III	•	
*Takes effect after you restart your computer		
Restore advanced se	ettings	
Reset Internet Explorer settings		
Resets Internet Explorer's settings to their default Reset condition.	et	
You should only use this if your browser is in an unusable state		
OK Cancel	<u>A</u> pply	

1.2 <u>Creating Shortcut for Oracle FLEXCUBE Application Browser</u> with –nomerge Parameter

To create shortcut for Oracle FLEXCUBE application browser, follow the steps given below:

1. Right click on Desktop, mouse over 'New' and select 'Shortcut'.



2. The 'Create Shortcut' window is displayed:

🕞 🝙 Create Shortcut	x
What item would you like to create a shortcut for?	
This wizard helps you to create shortcuts to local or network programs, files, folders, computers, or Internet addresses.	
Type the location of the item: Browse Browse	
Click Next to continue.	
Next Car	ncel

3. Click 'Browse' button and select 'IExplorer.exe' from its location.

4. To create a shortcut for Oracle FLEXCUBE login page, specify the location of the item in the following format:

"Location_of_Internet_Explorer" -nomerge "<Application_URL>"

Eg: "C:\Program Files\Internet Explorer\iexplore.exe" -nomerge "<Application_URL>"

In this case C:\Program Files\Internet Explorer\iexplore.exe is the location of Internet Explorer.

5. Click 'Next'.

The following screen is displayed:

What would you like to name the shortcut?	
Type a name for this shortcut:	
Click Finish to create the shortcut.	

- 6. Specify a name for the shortcut.
- 7. Click 'Finish'.
- 8. On the Desktop, you can find a shortcut to access the Oracle FLEXCUBE login page.



1.3 Setting Compatibility View (IE 8 onwards)

The URL of the Oracle FLEXCUBE IS should not be there in the Compatibility View list of the Internet Explorer. You need to follow the URL from compatibility view list by following the steps below:

1. Start Internet Explorer. Go to Tools > Compatibility View Settings.

The following screen is displayed:

Compatibility View Settings	×
Change Compatibility View Settings	
Add this website:	
	Add
Websites you've added to Compatibility View:	
	Remove
Display intranet sites in Compatibility View	
Use Microsoft compatibility lists	
Learn more by reading the <u>Internet Explorer privacy s</u>	tatement
	Close

- 2. Under 'Websites you've added to Compatibility View', check whether the URL to Oracle FLEXCUBE Application is listed or not. If the URL is listed, select it.
- 3. Click on 'Remove' button. The URL will be removed. Further, click 'Close' button.

1.4 Suppressing Compatibility View Refresh

You can suppress the Internet Explorer 8 to refresh the webpage to compatibility view. Follow the steps given below:

1. Start Internet Explorer. Go to Tools > Internet Options. Select 'Advanced' tab.


Internet Options	2	x
General Security Privacy Content Connections Programs	Adv	anced
Settings		-
 Accelerated graphics Use software rendering instead of GPU rendering* Accessibility Always expand ALT text for images Enable Caret Browsing for new windows and tabs Move system caret with focus/selection changes Play system sounds Reset text size to medium for new windows and tabs Reset text size to medium for new windows and tabs Browsing Always record developer console messages Close unused folders in History and Favorites* ✓ Disable script debugging (Internet Explorer) ✓ Uii unitation 	4	• E
*Takes effect after you restart your computer		
Reset Internet Explorer settings Resets Internet Explorer's settings to their default condition. You should only use this if your browser is in an unusable state	- et	
OK Cancel	Ar	oply

- 2. In the settings, uncheck the option 'Automatically recover from page layout errors with Compatibility View' under 'Browsing'.
- 3. Click 'OK'.

1.5 Clearing the Cache

This section explains the method of clearing Internet Explorer cache. Follow the steps given below:

1. Start Internet Explorer. Go to Tools > Internet Options. Select 'General' tab.

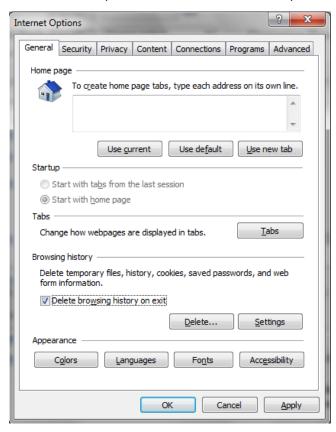


- 2. Check the option 'Delete browsing history on exit'.
- 3. To clear the existing cache, click 'Delete' button.

1.6 Suppressing Caching

You can suppress caching the Internet details. Follow the steps given below:

- 1. Start Internet Explorer. Go to Tools > Internet Options. Select 'General' tab.
- 2. Under 'Browsing History', click 'Settings' button.

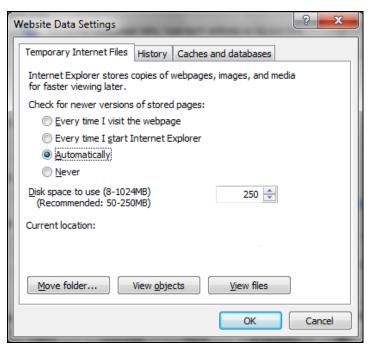

- 3. Against 'Check for newer versions of stored pages', set the option 'Automatically'.
- 4. Click 'OK'. You will be navigated back to the 'Internet Options' screen. Click 'OK'.

1.7 Settings for Trusted Sites

In order to remove the site from the list of trusted sites, follow the steps given below:


1. Start Internet Explorer. Go to Tools > Internet Options.

Select 'Security' tab



- 2. Click 'Local Intranet' zone.
- 3. Click 'Sites' button.

Following screen is displayed:

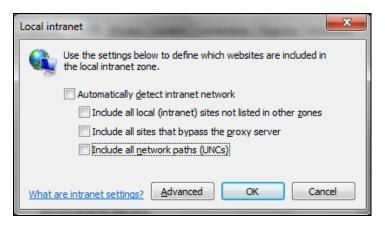

- 4. Uncheck all the options on the screen.
- 5. Click on 'OK'.

1.8 Settings for Pop-up Blocker

You need to configure the pop-up blocker settings for Internet Explorer. Follow the steps given below:

1. Start Internet Explorer. Go to Tools > Pop-up Blocker > Pop-up Blocker Settings.

The following screen is displayed:

p-ups from specific
Add
12
Remove
Bemove all.
Tionovo or

- 2. Enter the URL in the field 'Address of website to allow'.
- 3. Click 'Add' button. The URL will be added to the allowed list. Click 'Close' button.

1.9 Internet Explorer 11 Settings

Do not save the password while login to application. In internet explorer make sure that the below check boxes are uncheck. Tools > Internet Options > Content > Auto Complete > Settings > Use Auto Complete For > User names and passwords on forms & Ask me before saving password.

1.10 Browser Behavior

On clicking List of Values (LOV) button in the application, the cursor is positioned before the '%' symbol in the query field.



Configuring Internet Explorer [December] [2017] Version 12.0.4.7.11

Oracle Financial Services Software Limited Oracle Park Off Western Express Highway Goregaon (East) Mumbai, Maharashtra 400 063 India

Worldwide Inquiries: Phone: +91 22 6718 3000 Fax:+91 22 6718 3001 www.oracle.com/financialservices/

Copyright © [2007], [2017], Oracle and/or its affiliates. All rights reserved.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate failsafe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

This software or hardware and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products.