



Siebel CRM Web Services Reference

Siebel Innovation Pack 2014
November 2014

ORACLE®

Copyright © 2005, 2014 Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Access to Oracle Support

Oracle customers have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

Contents

Chapter 1: What's New in This Release

Chapter 2: Siebel CRM Web Services Overview

How Siebel Business Applications Are Deployed as Web Services	17
About Siebel Web Services	17
Core Technologies for Web Services	18
Web Services Deployment Cycle	19
Siebel Web Service Documentation	20
Support for Siebel Web Services	20
Siebel Web Services Architecture	24
Process of Making Available a Siebel Web Service	24
About Siebel Web Service Modeling	26
Exposing a Business Service as a Web Service	26
Exposing a Workflow as a Web Service	28
Using the Web Services Deployment Wizard	29
About Siebel Web Service Authentication and Performance	29
Invoking Web Services from the Siebel Mobile Client	30

Chapter 3: Siebel CRM Primary Web Services

Primary Siebel CRM Web Services	36
ABOWebService	46
Account	54
AccountBalanceSiebelCommsReqABCS	56
AdjustmentSiebelCommsReqABCS	61
AssetManagementComplex	63
CalculateShippingChargeSalesOrderSiebelReqABCSImpl	67
CatalogWebService	69

CheckATPSalesOrderSiebelReqABCS Impl	74
ClinicalSubject	76
CMU Account Query	79
CMU Account Update	81
ConfiguratorUserLangSiebelAdapter	83
Contact	85
CreateLeads Web Service	87
CreditCheckSalesOrderSiebelReqABCSImpl	90
FetchAccountSiebelReqABCSImpl	92
FetchContactSiebelReqABCSImpl	95
FS Asset Warranty Service	98
GetCampaigns Web Service	100
GetMktgWebSurvey	102
InvoiceSiebelCommsReqABCS	104
ISS Price List Item WS	109
ISS Web Commerce Export Attributes	112
ISS Web Commerce Export Class	114
ISS Web Commerce Export Content	117
ISS Web Commerce Export Error	120
ISS Web Commerce Export Price Lists	124
ISS Web Commerce Export Recommended Products	127
ISS Web Commerce Export Volume Discounts	130
LeadProcessingService	132
LeadService	137
List	142
ListMgmtProspect	145
LoyaltyAccrualService	147
LoyaltyBatchEnrollment	151
LoyaltyImportBusinessService	157
LoyaltyMemberService	158
LoyaltyRedemptionService	171

LoyaltyVoucherService	186
LS Clinical CRF Tracking Interface Service	188
LS Clinical Protocol Site Interface Service	199
LS Clinical Subject Information Interface Service	217
LSSGOP_Account	233
LSSGOP_AccountAddress	236
LSSGOP_Activity	238
LSSGOP_ActivityContact	241
LSSGOP_CatalogCategory	244
LSSGOP_Contact	247
LSSGOP_ContactAccount	250
LSSGOP_ContactAddress	253
LSSGOP_ContactBestTime	256
LSSGOP_ContactLicense	259
LSSGOP_CurrentUser	262
LSSGOP_LanguageLOV	263
LSSGOP_Literature	264
LSSGOP_Literature_ALL	267
LSSGOP_LiteratureCatalog	270
LSSGOP_MessagePlan	273
LSSGOP_MessagePlan_ALL	277
LSSGOP_MessagePlanCatalog	280
LSSGOP_MessageResponse	283
LSSGOP_MsgPlanItem	286
LSSGOP_MsgPlanItem_ALL	289
LSSGOP_MsgPlanItemRelation	292
LSSGOP_MsgPlanItemRelation_ALL	295
LSSGOP_PersonalList	298
LSSGOP_PositionContactAddress	301
LSSGOP_Product	304
LSSGOP_ProductIndication	305

LSSGOP_ProductsDetailed	307
LSSGOP_PromotionalItemsDropped	310
LSSGOP_RelatedAccount	313
LSSGOP_RelatedContact	316
LSSGOP_RelatedLiterature	319
LSSGOP_RetailObjective	322
LSSGOP_Revenue	326
LSSGOP_SampleDisclaimer	329
LSSGOP_SampleDropped	332
LSSGOP_SampleInventory	335
LSSGOP_SampleTransaction	338
LSSGOP_Signature	341
LSSGOP_TransactionItem	344
ModificationTracking	347
LSSGOP_ModificationTrackingPurge	349
MatchAccountSiebelReqABCImpl	350
MatchContactSiebelReqABCImpl	352
MktgDeduplicationService	354
MktgImportService	359
NetworkOrderEntry	361
OrderDetailWebService	363
PaymentAuthorizationSalesOrderSiebelReqABCImpl	365
PaymentSiebelCommsReqABCS	367
PDSOrderHeader	372
PriceListsWS	373
ProcessSalesOrderSiebelJMSProducer	374
Product Configurator Web Service	376
Product Configurator Web Service for Orders	391
Product Import	406
Product Offer	413
ProductSearchService	422

Promotion Asset Web Service	425
PromotionWebService	430
QueryTransportationSalesOrder ItineraryListSiebelReqABCSImpl Web Service	435
QuoteCheckOutWebService	437
QuoteDetailWebService	439
QuoteWebService and OrderWebService	441
QuotingWebService	446
Response	449
RetrieveAttachmentService	452
RTD_NBA Integration Service	455
SCOAExportWS	462
searchSolution	464
SelfServiceAccount	467
SelfServiceAccountRootPath	473
SelfServiceAllAccountsList	476
SelfServiceContact	481
SelfServicePaymentHistory	490
SelfServicePostLoginProcess	492
SelfServiceRegistration	496
SelfServiceResponsibility	510
SelfServiceSmtplibEmail	512
SelfServiceTemplateEmail	515
SelfServiceTimeZone	517
SelfServiceUser	519
SelfServiceWebSite	523
ServiceRequest	526
SessionAccessWS	531
SFA_Activity_BS	533
SWIAdjustmentStatusUpdate	535
SWIAdminISSAttributeDefnIO	536
SWIAdminISSClassDefinitionIO	538

SWIAssetManagement	540
SWIContactServices	543
SWICreateAdjustment	550
SWICustomerParty	552
SWILocationServices	559
SWILocationSync	561
SWILSClinicalActivityTemplate	562
SWILSClinicalCreateSiteVisitGeo Location	565
SWILSClinicalGetEmployees	567
SWILSClinicalGetSiteContacts	571
SWILSClinicalGetSiteSnapshot	576
SWILSClinicalGetSmartScriptDetails	578
SWILSClinicalGetStateModelService	580
SWILSClinicalGetSubjectVisitDetails	584
SWILSClinicalInsertEmployees	589
SWILSClinicalListOfValues	591
SWILSClinicalProtocolSiteGetSites	596
SWILSClinicalQueryProtocolSite_ SiteVisits	602
SWI LS Clinical Payments Inbound	608
SWILSClinicalTripReportInterface Service	609
SWILSClinicalTripReportTemplates	638
SWI LS Medical Product Issue Create Inbox Item Inbound	640
SWI LS Medical Update Product Issue Inbound	642
SWIMergeServices	643
SWIOrderUpsert	646
SWI Price List IO	648
SWIISSPriceListItemIO	652
SWIProductAttributeImport	657
SWIProductClassImport	659

SWIProductImport	661
SWIProductLine	667
SWIPromotionIntegration	679
SWIQuoteUpsert	693
SWISpecialRatingList	694
SWISubmitOrder	695
SWISubmitOrder_o2c	697
SWISubmitQuote_o2c	698
SWISyncProduct	700
SWITroubleTicket	701
SWI Update Order Line Item	704
SyncCustomerSiebelEventAggregator	706
TNT History Oppty Insert	715
UInbox Contact Item	717
UnbilledUsageSiebelCommsReqABCS	720
Universal Inbox	724
UpdateCreditAlertSiebelCommsReqABCImpl	726
UpdateCustomerSiebelJMSProducer	727
WC_PickList_Payment_Profile_BS	730
WebMarketing	733

Index

1

What's New in This Release

What's New in Siebel CRM Web Services Reference, Siebel Innovation Pack 2014

Table 1 lists the changes described in this version of the documentation to support this release of the software.

NOTE: Siebel Innovation Pack 2014 is a continuation of the Siebel 8.1/8.2 release.

Table 1. New Product Features in Siebel CRM Web Services Reference, Siebel Innovation Pack 2014

Topic	Description
"ClinicalSubject" on page 76	Modified topic. Enhanced descriptions of operations.
"LS Clinical CRF Tracking Interface Service" on page 188	New topic. It describes how the Web service query for Case Report Forms.
"LS Clinical Protocol Site Interface Service" on page 199	New topic. It describes how the Web service can be used to pull information from protocol sites.
"LS Clinical Subject Information Interface Service" on page 217	New topic. It describes how the Web service can be used to pull subject statuses.
"Promotion Asset Web Service" on page 425	New topic. It describes how the Web service can be used to retrieve a promotion instance.
"PromotionWebService" on page 430	Modified topic. Enhanced the description of the ApplyProductPromotion operation request.
"QuoteWebService and OrderWebService" on page 441	New topic. It describes how the Web service can be used to manipulate quote or order data.
"QuotingWebService" on page 446	New topic. It describes how the Web service for anonymous quoting.
"RTD_NBA Integration Service" on page 455	New topic. It describes how the Web service enables you to integrate Siebel Contact Center with Oracle Real-Time Decisions (RTD) Server.
"SelfServiceContact" on page 481	Modified topic. Enhanced description.
"SWILSClinicalGetSiteSnapshot" on page 576	New topic. It describes how the Web service is used to capture a snapshot of subject status accrual data.
"SWILSClinicalGetSmartScriptDetails" on page 578	New topic. It describes how the Web service is used to retrieve smart script details.
"SWILSClinicalTripReportTemplates" on page 638	New topic. It describes how the Web service is used to retrieve Clinical Trip Report templates.

Table 1. New Product Features in Siebel CRM Web Services Reference, Siebel Innovation Pack 2014

Topic	Description
"SWIProductLine" on page 667	New topic. It describes how the Web service is used to create, update, and query product lines.
"SWIPromotionIntegration" on page 679	New topic. It describes how the Web service is used to add or update pricing information for promotions.

What's New in Siebel CRM Web Services Reference, Siebel Innovation Pack 2014

Table 2 lists the changes described in this version of the documentation to support this release of the software.

Table 2. New Product Features in Siebel CRM Web Services Reference, Siebel Innovation Pack 2014

Topic	Description
LoyaltyRedemptionService on page 171	Modified topic. Added a new operation, ProcessRealTimeRedemption, which checks all pending redemption transactions and verifies the loyalty point balance in an account.
SWI LS Clinical Payments Inbound on page 608	Modified topic. Added a description of the VATAmount node to the UpdateClinicalPayment table.

What's New in Siebel CRM Web Services Reference, Version 8.1, Rev. I

Table 3 lists changes described in this version of the documentation to support release 8.1 of the software.

Table 3. New Product Features in Siebel CRM Web Services Reference, Version 8.1, Rev. I

Topic	Description
CreateLeads Web Service on page 87	New topic. It describes how the Web service can create lead records.
GetCampaigns Web Service on page 100	New topic. It describes how the Web service retrieves campaigns and associated details from Siebel CRM.
ISS Price List Item WS on page 109	New topic. It describes how the Web service is used to add, update, and delete items in a price list in the Siebel application.

Table 3. New Product Features in Siebel CRM Web Services Reference, Version 8.1, Rev. I

Topic	Description
ISS Web Commerce Export Attributes on page 112	New topic. It describes how the Web service is used to query for attribute definitions and values that were created in Siebel Customer Order Management.
ISS Web Commerce Export Class on page 114	New topic. It describes how the Web service is used to query for class definitions that were created in Siebel Customer Order Management.
ISS Web Commerce Export Content on page 117	New topic. It describes how the Web service is used to query or update content job header or line items that were created in Siebel Customer Order Management.
ISS Web Commerce Export Error on page 120	New topic. It describes how the Web service is used to query, update, or insert export content error messages for export job header or line items that were created in Siebel Customer Order Management.
ISS Web Commerce Export Price Lists on page 124	New topic. It describes how the Web service is used to query for price lists that were created in Siebel Customer Order Management.
ISS Web Commerce Export Recommended Products on page 127	New topic. It describes how the Web service is used to query for recommended products that were created in Siebel Customer Order Management.
ISS Web Commerce Export Volume Discounts on page 130	New topic. It describes how the Web service is used to query for volume discounts and volume discount items that were created in Siebel Customer Order Management.
LoyaltyAccrualService on page 147	Modified topic. Added a new operation, ProcessSocialActionTxn, which captures customers' social actions and processes their rewards in Siebel Loyalty.
LoyaltyBatchEnrollment on page 151	Modified topic. Added a new operation, EnrolContactAsMember that creates a Siebel Loyalty membership for an existing Siebel contact from social networks.
LoyaltyMemberService on page 158	Modified topic. Added a new operation, PromotionEnrolmentForSMS that rewards Siebel Loyalty members with a referral bonus when their social networking friends enroll in promotions.

Table 3. New Product Features in Siebel CRM Web Services Reference, Version 8.1, Rev. I

Topic	Description
Product Configurator Web Service on page 376	New topic. It describes how the Web service is used to query for information contained within the product model, such as relationships, attributes, linked items, resources, UI groups.
Product Configurator Web Service for Orders on page 391	New topic. It describes how the Web service enables queries on information contained within the product model.
Product Offer on page 413	New topic. It describes how the Web service is used to retrieve and apply product offer information.
SCOAExportWS on page 462	New topic. It describes how the Web service is used to export an update commerce job to Siebel Commerce Object Aggregator (SCOA).
SWI Price List IO on page 648	New topic. It describes how the Web service is used to query, create, update, and delete price lists.
SWIISPriceListItemIO on page 652	New topic. It describes how the Web service is used to perform basic operations, such as create, update, modify, and delete price list line items
SyncCustomerSiebelEventAggregator on page 706	Modified topic. Added information about the aggregatesevent operation that allows you to aggregate statement profiles.

What's New in Siebel CRM Web Services Reference, Version 8.2, Rev. A

Table 4 lists changes described in this version of the documentation to support release 8.1 of the software.

Table 4. New Product Features in Siebel CRM Web Services Reference, Version 8.2, Rev. A

Topic	Description
LoyaltyAccrualService on page 147	Modified topic. Added a new operation, ProcessSocialActionTxn, which captures customers' social actions and processes their rewards in Siebel Loyalty.
LoyaltyBatchEnrollment on page 151	Modified topic. Added a new operation, EnrolContactAsMember that creates a Siebel Loyalty membership for an existing Siebel contact from social networks.
LoyaltyMemberService on page 158	Modified topic. Added a new operation, PromotionEnrolmentForSMS that rewards Siebel Loyalty members with a referral bonus when their social networking friends enroll in promotions.

2

Siebel CRM Web Services Overview

This chapter provides an overview of Web services and guidance for implementing Oracle's Siebel Web services. It contains the following topics:

- [How Siebel Business Applications Are Deployed as Web Services on page 17](#)
- [About Siebel Web Services on page 17](#)
- [Core Technologies for Web Services on page 18](#)
- [Web Services Deployment Cycle on page 19](#)
- [Siebel Web Service Documentation on page 20](#)
- [Support for Siebel Web Services on page 20](#)
- [Siebel Web Services Architecture on page 24](#)
- [Process of Making Available a Siebel Web Service on page 24](#)
- [About Siebel Web Service Modeling on page 26](#)
- [Using the Web Services Deployment Wizard on page 29](#)
- [About Siebel Web Service Authentication and Performance on page 29](#)
- [Invoking Web Services from the Siebel Mobile Client on page 30](#)

How Siebel Business Applications Are Deployed as Web Services

Siebel Business Applications are Web service deployed through the following means:

- Inbound and Outbound Web services
- Integration Objects
- The Siebel application
- Business Services and Workflows

About Siebel Web Services

A Web service is a discrete piece of business logic, located somewhere on the Internet, which is accessible through Internet protocols. It is distinguished by the following:

- It is specified using Web Services Description Language (WSDL).
- It contains data represented in Extensible Markup Language (XML) and defined by XML Schema.
- It is transported by Simple Object Access Protocol (SOAP), an XML-based transport protocol.

Web Service as a Server-Side Service

A Web service is considered a server-side service if the following are true:

- It is the basis for interoperable, heterogeneous applications.
- Its interface is defined by XML (XML Schema and WSDL).
- Makes available coarse-grained, loosely-coupled operations on document-structured data.
- It is independent of underlying implementation.
- It is accessible through open standard protocols such as HTTP, SMTP, FTP, or JMS.

Web services are all of the following:

- A delivery mechanism for integrating loosely coupled software components.
- Delivered over standard Internet technologies.
- Rooted in:
 - Interoperability
 - Standards
 - XML
 - Coarse-grained exposure of functionality

Core Technologies for Web Services

Oracle's Siebel Web services use industry standard core technologies. The following topics provide an overview of each main core technology:

- ["About Web Services Description Language \(WSDL\)" on page 18](#)
- ["About XML and XML Schema" on page 19](#)
- ["About Simple Object Access Protocol \(SOAP\)" on page 19](#)

About Web Services Description Language (WSDL)

WSDL is an XML-based format for describing the interface of a Web service. WSDL describes the endpoints, location, protocol binding, operations, parameters, and data types of all aspects of a Web service:

- The WSDL file that describes a Web service has the following characteristics:
 - It is published by the service provider.
 - It is used by the client to format requests and interpret responses.
 - It can be optionally submitted to a registry or service broker to advertise a service.
- Additionally, the WSDL file describes the following:
 - The operations provided by a Web service.
 - The input and output message structures for each Web service operation.

- The mechanism to contact the Web service.

About XML and XML Schema

A WSDL file is published in the form of an XML document instance. Document or Literal is required as part of the WS-I interoperability standard that forms the basis of modern Web service usage, where:

- *Document* means that the payload for an operation, however complex, must be defined in a single XML element.
- *Literal* means that the definition of that element must be described by an XML Schema embedded in the WSDL file.

When using Document/Literal formatting, the WSDL file will contain an XML Schema definition that defines all messages and data types that will be used for a particular service. The payload itself will consist entirely of XML data structures.

About Simple Object Access Protocol (SOAP)

SOAP is a lightweight protocol intended for exchanging structured information in a decentralized, distributed environment. SOAP uses XML to define an extensible messaging framework.

SOAP messages consist of the following:

- An envelope for wrapping messages, including addressing and security information.
- A set of serialized rules for encoding data types in XML.
- Conventions for a procedure call and or response.

Web Services Deployment Cycle

A service provider describes its service in the form of a WSDL file. Typically, the WSDL file is obtained directly by the developer of the service client consumer.

At the time of the design of a Web service, the service consumer uses the WSDL to generate a proxy in his own native development environment, allowing him to program interactions with the service provider.

At run time the following occurs:

- The service consumer formats a request in accordance with the WSDL definition.
- The service provider provides the expected response to the service consumer.

Siebel Web Service Documentation

In addition to the documentation provided here, detailed documentation on the use of Siebel objects to create and maintain Web services can be found on the Siebel Bookshelf in *Integration Platform Technologies: Siebel Enterprise Application Integration*.

NOTE: The Siebel Bookshelf is available on Oracle Technology Network (<http://www.oracle.com/technetwork/indexes/documentation/index.html>) and Oracle Software Delivery Cloud. It might also be installed locally on your intranet or on a network location.

Information can be found on Siebel Web service technology and on Siebel Enterprise Application Integration (EAI) technologies like the Siebel Adapter (ASI) and the UI Data Service (UDS), which are designed for direct data-level access to the Siebel Object Manager. Information is also available there on XML Schema development, WSDL generation, Outbound Web service configuration, file attachments, authentication and security.

Support for Siebel Web Services

The following elements contribute to the deployment of Siebel Web services.

- [Inbound and Outbound Web Services on page 20](#)
- [Integration Objects on page 21](#)
- [Business Services on page 22](#)

Inbound and Outbound Web Services

Siebel Business Applications support both inbound and outbound Web services:

- Inbound Web services allow external clients to access Siebel functionality. For example, a custom UI that wants to view and modify Siebel service requests.

- Outbound Web services allow Siebel Business Applications to make requests of external applications. For example, if the Siebel Server wanted to provide its clients the option of either searching internally or searching the Internet, then the Siebel Server would invoke an Outbound Web service operation against a third-party search engine, incorporating the results in its own reply to the client.

Figure 1 displays Inbound and Outbound Web services.

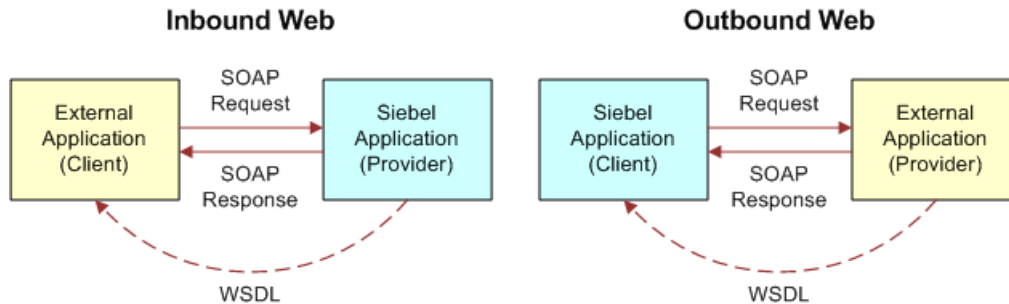


Figure 1. Inbound and Outbound Web Services

Integration Objects

Integration objects provide the primary means of structuring Web service messages. An integration object can be used to support both inbound and outbound Web services, its use with inbound Web services is more tightly bound to the Siebel Object Manager. An integration object represents a subset of a Siebel Business object. The ways in which the elements of the integration object correspond to the elements of the business component are explained as follows:

- Integration components represent business components.
- Integration component fields represent business component fields.
- Typically defines the structure of data being exchanged between a Siebel application and an external application.

- Internal Component Field names and WSDL element, and attribute names can be different. In Siebel Tools, In the Integration Component Fields applet, the column XML Tag governs the way the field name will appear in the WSDL.

Figure 2 displays the correspondence between Siebel objects and Integration objects.

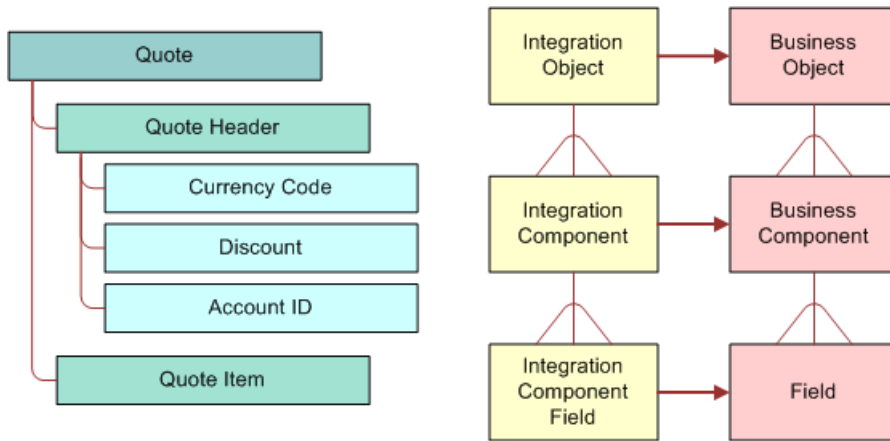


Figure 2. Integration Objects

Business Services

Business services allow you to deploy a reusable object that contains a predefined set of methods. Additionally, deploying business services allows you to model your Web services within Siebel Tools.

Siebel Web services employ two types of business service:

- CRUD (Create, Read, Update, Delete) data services, of the type: UDS and ASI.

- Functional Services such as custom business services and workflow.

Figure 3 displays business services and their corresponding Web service entities.

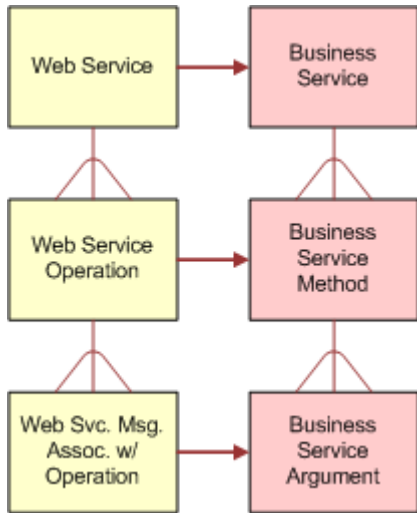


Figure 3. Business Services

Siebel Web Services Architecture

Figure 4 displays the basic architecture for Siebel Web services.

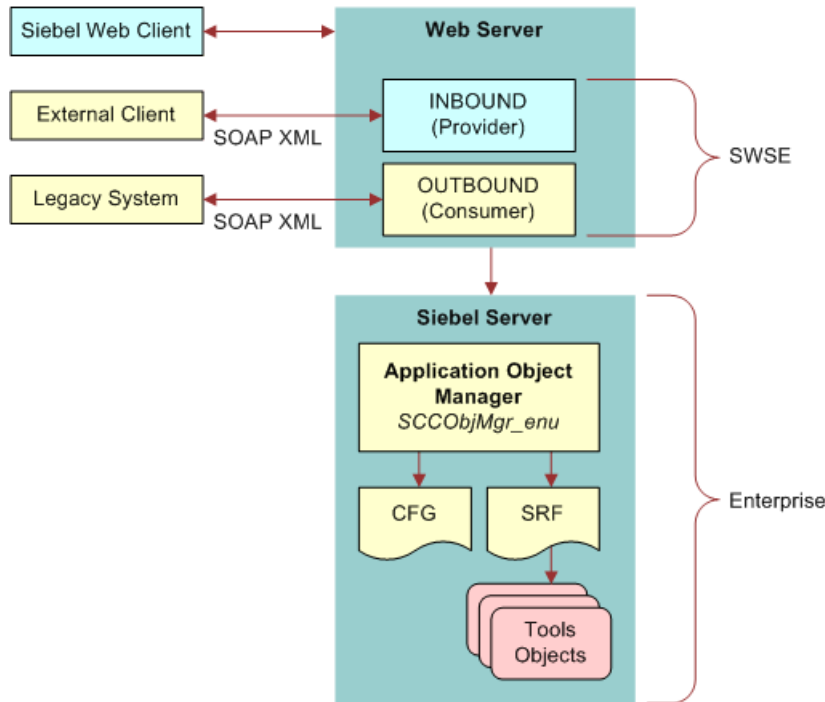


Figure 4. Siebel Web Services Architecture

Process of Making Available a Siebel Web Service

There are two major phases to the development of Siebel Web services. The Siebel objects involved meaning workflows, business services, and integration objects must be configured at design time in Siebel Tools. Then, those objects must be assembled into Web services using Siebel Business Applications. This topic describes the steps you must perform to make a Siebel Web service available.

Determine Which Siebel Objects to Make Available

When exposing a Siebel Web service, you must first use Siebel Tools to determine which Siebel objects, such as business services, workflows or integration objects, you will make available.

Business Services and Workflows

Consider the following when exposing business services and workflows:

- Business service methods and arguments correspond to Web service operations and messages. Most business services with methods registered in Siebel Tools can be designated for participation in a Web service.
- A workflow is one-to-one equivalent to a single Web service operation, and its process properties are the arguments to that operation. Like most business services, most workflows can be designated for participation in a Web service.

Integration Objects

Consider the following when exposing integration objects:

- Integration objects allow mapping of complex business service and workflow data structures to XML Schema as required by Web services.
- Integration objects act as boundary proxies for business objects and business components.

General Guidelines for Business Services, Workflows and Integration Objects

Consider the following general guidelines when exposing Siebel objects:

- In Siebel Tools make changes to business services, workflows and integration objects to model desired Web service interfaces.
- Compile the SRF and deploy the objects to be made available.

Assemble the Services

- In the Siebel application, the Administration - Web Services screens and views allow you to create and configure all Web services at run time.
- In the Administration - Web Services screens and views, administrators can select business services and associated methods that they want to make available as Web services.
- All Siebel objects must be design-time configured and deployed in the application SRF file before they can be used in Web service administration screens and views.
- For a limited subset of Web services, a Siebel Tools design-time wizard is available to set up most required configuration elements for UDS (UI Data Service) Web service exposure. These elements must also be compiled in the SRF before they can be referenced in the Web service administration screens and views.

To assemble your Web services, do the following:

To assemble a Web service in the Web Service Administration view

- 1** In the Siebel Mobile Web client, navigate to the Administration – Web Services screen.
- 2** Select either Inbound Web Services or Outbound Web Services.
- 3** Click New to create a new Web service, or select a Web service in the Inbound or Outbound Web Services list.

- 4 In the Service Ports list applet, select a business service or workflow to act as Web service invocation boundary object.

To combine the operations of several business services or workflows into a single service, add them to the port for the Web service.

- 5 In the Operations list, model WSDL by configuring methods belonging to the business service, or services and or the workflow or workflows listed in the service port.
- 6 Click the Generate WSDL button in the Inbound or Outbound Web Services list.

About Siebel Web Service Modeling

This topic includes the following information:

- [Exposing a Business Service as a Web Service on page 26](#)
- [Exposing a Workflow as a Web Service on page 28](#)

Exposing a Business Service as a Web Service

The following statements can be applied to business services consumed as Web services:

- Business service methods are Web service operations.
- Business service method arguments are Web service methods.

You can make business services available through the following means:

Classifying Business Service State Requirements in Siebel Tools

- Most Siebel Web service operations are classified as Stateless. In the Siebel Tools Object List editor, under business service, you can determine state requirements.
 - *Stateless* means that each Web service operation exists independently of any other.
 - *Stateful* means that Siebel Object Manager context must be maintained and correlated from one Web service operation invocation to the next.
- If a Web service operation is classified as Stateful, then the application data needs to be retained by the Siebel Server between method calls to determine whether the service could be made logically stateless.
- If a business service is either Stateless, or Server Managed, then it must be classified as Server Managed. When a Web service operation is classified as Server Managed, the business service can participate in either a Stateless or a Stateful Web service exchange. When Stateless is chosen, a business service cannot be enlisted at run time for participation in a Stateful exchange.

NOTE: At run time, the encoding of the SOAP header determines whether an operation is Stateful, Stateless, or Server Managed. For more information, see *Siebel Web UI Dynamic Developer Kit Guide on the Siebel Bookshelf*.

Registering Public Methods in Siebel Tools

- Specify the complete input and output arguments for each of these methods.
- If any of the arguments are a property set hierarchy, then do the following:
 - Define the property set structure as an integration object in Siebel Tools.
 - Specify the data type for this argument as Hierarchy and associate with integration objects.
 - To specify whether an argument appears in the input operation and or the output operation, use the Business Service Method Args Type column. Choose Input, Input/Output, or Output to direct the use of the argument in generating the WSDL.
- Once the preceding configuration steps in Siebel Tools are complete, and the SRF has been compiled and deployed, continue creating a Web service definition for this business service in Siebel Business Applications.
 - In the Administration - Web Services screen, Inbound Web Services view, configure the business service in the Service Ports list, create a service operation or operations in the Operations view and designate the business service method to execute.
 - Create a new Web service or choose an existing Web service in the Inbound Web Services view. Enter the WSDL XML namespace here.
 - Create a record in the Service Ports view, choose the business service in the Business Service/Business Process name column, set the Transport and URL, and select SOAP_DOC_LITERAL in the Binding column.
 - Create a service operation in the Operations view, set the WSDL operation name in the Operation Name column, and designate the Business Service method as the Siebel method to execute in the 'Method Display Name' column. Operations are mapped in Operations applet.

NOTE: The Siebel Inbound Web Service Dispatcher is set up with a name resolution mechanism that requires entries in the Operation Name field to be unique within a Siebel database instance. Generally, this uniqueness requirement can be simplified by combining the Service Name with the Method Display Name.

Deploying a Business Service as a Web Service

You deploy business services as Web services in Siebel Tools. To be deployed, a business service must have at least one accessible method that is supported in Siebel inbound Web services. The business service must include a valid integration object name for any hierarchical argument. The following procedure explains how to deploy a business service as a Web service.

To deploy a business service as a Web service

- 1 In the Siebel Tools Object Explorer, select the Business Service object.
The Business Services list appears.
- 2 In the Object List Editor, right-click the business service to deploy, and then choose Deploy as Web Service.
- 3 Specify the following in the dialog box, and then click Finish:

- Business Service methods to make available. The operation names for the business service methods are system generated. To edit an operation name, click it in the list.
- URL for Web service. Replace *webserver* with a valid host name and *lang* with a valid language code, such as ENU.
- Generate WSDL checkbox. To generate a Web Services Description Language (WSDL) file, click the checkbox, and then choose a location to save the WSDL file.

The business service is deployed. Deployed business services are shown in the Administration - Business Services screen in the Siebel client. Deployed Web services are shown in the Administration - Inbound Web Services view.

For more information about deploying business services as Web services, see *Integration Platform Technologies: Siebel Enterprise Application Integration* on the Siebel bookshelf.

Exposing a Workflow as a Web Service

The following statements can be applied to workflows consumed as Web services.

- A workflow corresponds to a single Web service operation.
- Workflow process properties are Web service messages. A workflow property set has no direct external representation but can be mapped to an Integration object.

NOTE: Workflows that are either Persistent or Interactive must be refactored to work as Web services.

The following procedure explains how to make workflows available as Web services.

To make workflows available as a Web services

1 Identify process properties that are to be made available and correctly mark them as follows:

- *In* if used as an input argument.
- *Out* if used as an output argument.
- *In/Out* if used as both input and output.

NOTE: The *In*, *In/Out*, and *Out* arg types are included in the interface definition.

2 If any process property is a property set hierarchy, then complete the following steps:

- a Define the property set structure as an integration object in Siebel Tools.
- b Specify data type for this process property as hierarchy and associate with an integration object.

NOTE: This is important as you must make available a strongly-typed interface, including arguments.

3 In the Administration – Web Services screen, Inbound Web Services view do the following:

4 Create a new Web service record or choose an existing Web service in the Inbound Web Services list. Enter the WSDL XML namespace here.

- 5 Create a record in Service Ports, choose the workflow in the Business Service/Business Process name column, set the Transport and URL properties, and select SOAP_DOC_LITERAL in the Binding column.

NOTE: To model a complete Web service with more than one operation, several service ports might be specified under a single Web service. This is normal and expected.

- 6 Create a service operation in Operations, set the WSDL operation name in the Operation Name column, and designate RunProcess as the Siebel method to execute in the Method Display Name column.

NOTE: The observation about operation naming uniqueness noted in this topic applies here as well. Generally, Siebel Business Applications have resolved this uniqueness requirement by combining the service name with an abbreviation of the workflow name.

Using the Web Services Deployment Wizard

As a convenience, Siebel Tools has wizard-style tools to assist in the configuration of business services, workflows and integration objects into Web services.

If you already have a business service configured and ready for use as a Web service, then right-click on the business service and select Deploy as Web Service... from the menu. You can perform this task for workflows by right-clicking on the desired workflow process record.

If you have modeled an integration object and want to use it for low-level data operations like Create, Read, Update, Delete (CRUD) and the use of the UDS (UI Data Service) service meets your needs, then you can have a wizard build a business service based on the underlying UDS class (CSSEAIUIDataService) and publish the resulting business service as a Web service. From the Siebel Tools file menu, select File, New Object, EAI, and then Data Access Service.

NOTE: This wizard does not create ASI-based Services.

About Siebel Web Service Authentication and Performance

In implementations where scalability is critical, a lightweight context management facility for authentication is available and its use is recommended. With this facility, authentication is managed using a combination of user credentials and a sessionID token:

- When user credentials are presented in the SOAP header of a Web service request, formal authentication is performed prior to the application execution of the Web service operation. If the authentication succeeds, then the operation proceeds and a special SessionID token are placed in the SOAP header of the Web service reply.

- Whenever the SessionID is included by the client in subsequent Web service requests, that SessionID will be used to restore cached session information, thus bypassing the substantially more expensive process of re-executing the authentication. Note that, when presented with both the SessionID and a valid set of user credentials, an attempt will be made to use the SessionID before resorting to the user credentials and re-authentication. As expected, the session that is being tracked by the SessionID is subject to expiration and other security checks.

The facility is a distinct alternative to the basic authentication standard described by WS-Security. Using the UserName token as provided in WS-Security, while fully supported as part of Siebel's WS-I Basic Profile compliance, will not yield the same benefit as using the higher-performance session optimization facility provided by the Siebel implementation.

For detailed information on authentication and security see *Integration Platform Technologies: Siebel Enterprise Application Integration*, and *Siebel Security Guide*.

Invoking Web Services from the Siebel Mobile Client

The Siebel Mobile Web Client can serve the same Web services as those deployed on the Siebel Server, while protecting access through simple authentication. Invoking Web services from the Siebel Mobile Client allows developers to integrate external applications with Siebel Business Applications and to test their integrations, without having to install an entire Siebel Enterprise.

NOTE: This functionality is provided as ACR 492. For release 8.1 of Siebel Business Applications, implementing this functionality requires installing a patch release and performing postinstallation configuration tasks. For an ACR that is included in a Siebel Fix Pack 8.1.1.x release, see the relevant instructions in the applicable *Siebel Maintenance Release Guide* on My Oracle Support. For more information on invoking Web services from the Siebel Mobile Web Client, see *Integration Platform Technologies: Siebel Enterprise Application Integration*.

3

Siebel CRM Primary Web Services

This chapter includes detailed descriptions and information about Siebel Web services.

NOTE: This guide describes Web services supported by Siebel CRM, version 8.1 and later. For information on Siebel Web Services earlier than version 8.1, see *Siebel CRM Web Services Reference*, version 8.0 on Oracle Technology Network.

Web services described in this chapter include the following:

- [Primary Siebel CRM Web Services on page 36](#)
- [ABOWebService on page 46](#)
- [Account on page 54](#)
- [AccountBalanceSiebelCommsReqABCS on page 56](#)
- [AdjustmentSiebelCommsReqABCS on page 61](#)
- [AssetManagementComplex on page 63](#)
- [CalculateShippingChargeSalesOrderSiebelReqABCServiceImpl on page 67](#)
- [CatalogWebService on page 69](#)
- [CheckATPSalesOrderSiebelReqABCS Impl on page 74](#)
- [ClinicalSubject on page 76](#)
- [CMU Account Query on page 79](#)
- [CMU Account Update on page 81](#)
- [ConfiguratorUserLangSiebelAdapter on page 83](#)
- [Contact on page 85](#)
- [CreditCheckSalesOrderSiebelReqABCServiceImpl on page 90](#)
- [FetchAccountSiebelReqABCServiceImpl on page 92](#)
- [FetchContactSiebelReqABCServiceImpl on page 95](#)
- [FS Asset Warranty Service on page 98](#)
- [GetMktgWebSurvey on page 102](#)
- [InvoiceSiebelCommsReqABCS on page 104](#)
- [ISS Price List Item WS on page 109](#)
- [LeadProcessingService on page 132](#)
- [List on page 142](#)
- [ListMgmtProspect on page 145](#)
- [LoyaltyAccrualService on page 147](#)

- [LoyaltyBatchEnrollment](#) on page 151
- [LoyaltyImportBusinessService](#) on page 157
- [LoyaltyMemberService](#) on page 158
- [LoyaltyRedemptionService](#) on page 171
- [LoyaltyVoucherService](#) on page 186
- [LS Clinical CRF Tracking Interface Service](#) on page 188
- [LS Clinical Protocol Site Interface Service](#) on page 199
- [LS Clinical Subject Information Interface Service](#) on page 217
- [LSSGOP_Account](#) on page 233
- [LSSGOP_AccountAddress](#) on page 236
- [LSSGOP_Activity](#) on page 238
- [LSSGOP_ActivityContact](#) on page 241
- [LSSGOP_CatalogCategory](#) on page 244
- [LSSGOP_Contact](#) on page 247
- [LSSGOP_ContactAccount](#) on page 250
- [LSSGOP_ContactAddress](#) on page 253
- [LSSGOP_ContactBestTime](#) on page 256
- [LSSGOP_ContactLicense](#) on page 259
- [LSSGOP_CurrentUser](#) on page 262
- [LSSGOP_LanguageLOV](#) on page 263
- [LSSGOP_Literature](#) on page 264
- [LSSGOP_Literature_ALL](#) on page 267
- [LSSGOP_LiteratureCatalog](#) on page 270
- [LSSGOP_MessagePlan](#) on page 273
- [LSSGOP_MessagePlan_ALL](#) on page 277
- [LSSGOP_MessagePlanCatalog](#) on page 280
- [LSSGOP_MessageResponse](#) on page 283
- [LSSGOP_MsgPlanItem](#) on page 286
- [LSSGOP_MsgPlanItem_ALL](#) on page 289
- [LSSGOP_MsgPlanItemRelation](#) on page 292
- [LSSGOP_MsgPlanItemRelation_ALL](#) on page 295
- [LSSGOP_PersonalList](#) on page 298
- [LSSGOP_PositionContactAddress](#) on page 301

- [LSSGOP_Product](#) on page 304
- [LSSGOP_ProductIndication](#) on page 305
- [LSSGOP_ProductsDetailed](#) on page 307
- [LSSGOP_PromotionalItemsDropped](#) on page 310
- [LSSGOP_RelatedAccount](#) on page 313
- [LSSGOP_RelatedContact](#) on page 316
- [LSSGOP_RelatedLiterature](#) on page 319
- [LSSGOP_RetailObjective](#) on page 322
- [LSSGOP_Revenue](#) on page 326
- [LSSGOP_SampleDisclaimer](#) on page 329
- [LSSGOP_SampleDropped](#) on page 332
- [LSSGOP_SampleInventory](#) on page 335
- [LSSGOP_SampleTransaction](#) on page 338
- [LSSGOP_Signature](#) on page 341
- [LSSGOP_TransactionItem](#) on page 344
- [ModificationTracking](#) on page 347
- [LSSGOP_ModificationTrackingPurge](#) on page 349
- [MatchAccountSiebelReqABCSImpl](#) on page 350
- [MatchContactSiebelReqABCSImpl](#) on page 352
- [MktgDeduplicationService](#) on page 354
- [MktgImportService](#) on page 359
- [NetworkOrderEntry](#) on page 361
- [OrderDetailWebService](#) on page 363
- [PaymentAuthorizationSalesOrderSiebelReqABCSImpl](#) on page 365
- [PaymentSiebelCommsReqABCS](#) on page 367
- [PDSOrderHeader](#) on page 372
- [PriceListsWS](#) on page 373
- [ProcessSalesOrderSiebelJMSProducer](#) on page 374
- [Product Import](#) on page 406
- [Promotion Asset Web Service](#) on page 425
- [PromotionWebService](#) on page 430
- [QueryTransportationSalesOrder ItineraryListSiebelReqABCSImpl Web Service](#) on page 435
- [QuoteCheckOutWebService](#) on page 437

- [QuoteDetailWebService](#) on page 439
- [QuoteWebService](#) and [OrderWebService](#) on page 441
- [QuotingWebService](#) on page 446
- [Response](#) on page 449
- [RetrieveAttachmentService](#) on page 452
- [RTD_NBA Integration Service](#) on page 455
- [SCOAExportWS](#) on page 462
- [searchSolution](#) on page 464
- [SelfServiceAccount](#) on page 467
- [SelfServiceAccountRootPath](#) on page 473
- [SelfServiceAllAccountsList](#) on page 476
- [SelfServiceContact](#) on page 481
- [SelfServicePaymentHistory](#) on page 490
- [SelfServicePostLoginProcess](#) on page 492
- [SelfServiceRegistration](#) on page 496
- [SelfServiceResponsibility](#) on page 510
- [SelfServiceSmtpEmail](#) on page 512
- [SelfServiceTemplateEmail](#) on page 515
- [SelfServiceTimeZone](#) on page 517
- [SelfServiceUser](#) on page 519
- [SelfServiceWebSite](#) on page 523
- [ServiceRequest](#) on page 526
- [SessionAccessWS](#) on page 531
- [SFA_Activity_BS](#) on page 533
- [SWIAdjustmentStatusUpdate](#) on page 535
- [SWIAdminISSAttributeDefnIO](#) on page 536
- [SWIAdminISSClassDefinitionIO](#) on page 538
- [SWIAssetManagement](#) on page 540
- [SWIContactServices](#) on page 543
- [SWICreateAdjustment](#) on page 550
- [SWICustomerParty](#) on page 552
- [SWILocationServices](#) on page 559
- [SWILocationSync](#) on page 561

- [SWILSClinicalActivityTemplate](#) on page 562
- [SWILSClinicalCreateSiteVisitGeo Location](#) on page 565
- [SWILSClinicalGetEmployees](#) on page 567
- [SWILSClinicalGetSiteContacts](#) on page 571
- [SWILSClinicalGetSiteSnapshot](#) on page 576
- ["SWILSClinicalGetSmartScriptDetails"](#) on page 578
- [SWILSClinicalGetStateModelService](#) on page 580
- [SWILSClinicalGetSubjectVisitDetails](#) on page 584
- [SWILSClinicalInsertEmployees](#) on page 589
- [SWILSClinicalListOfValues](#) on page 591
- [SWILSClinicalProtocolSiteGetSites](#) on page 596
- [SWILSClinicalQueryProtocolSite_ SiteVisits](#) on page 602
- [SWI LS Clinical Payments Inbound](#) on page 608
- [SWILSClinicalTripReportInterface Service](#) on page 609
- ["SWILSClinicalTripReportTemplates"](#) on page 638
- [SWI LS Medical Product Issue Create Inbox Item Inbound](#) on page 640
- [SWI LS Medical Update Product Issue Inbound](#) on page 642
- [SWIMergeServices](#) on page 643
- [SWIOrderUpsert](#) on page 646
- [SWIProductAttributeImport](#) on page 657
- [SWIProductClassImport](#) on page 659
- [SWIProductImport](#) on page 661
- ["SWIProductLine"](#) on page 667
- [SWIPromotionIntegration](#) on page 679
- [SWIQuoteUpsert](#) on page 693
- [SWISpecialRatingList](#) on page 694
- [SWISubmitOrder](#) on page 695
- [SWISubmitOrder_o2c](#) on page 697
- [SWISubmitQuote_o2c](#) on page 698
- [SWISyncProduct](#) on page 700
- [SWITroubleTicket](#) on page 701
- [SWI Update Order Line Item](#) on page 704
- [SyncCustomerSiebelEventAggregator](#) on page 706

- [TNT History Oppty Insert on page 715](#)
- [UnInbox Contact Item on page 717](#)
- [UnbilledUsageSiebelCommsReqABCS on page 720](#)
- [Universal Inbox on page 724](#)
- [UpdateCreditAlertSiebelCommsReqABCImpl on page 726](#)
- [UpdateCustomerSiebelJMSProducer on page 727](#)
- [WC_PickList_Payment_Profile_BS on page 730](#)
- [WebMarketing on page 733](#)

Primary Siebel CRM Web Services

The following tables list the primary Web services available with Siebel CRM, version 8.2. The Web services and the namespaces for each are divided into tables by functional area.

- [Siebel Custom UI Primary Web Services on page 36](#)
- [Siebel Self-Service Primary Web Services on page 37](#)
- [Siebel Marketing Primary Web Services on page 38](#)
- [Siebel Loyalty Primary Web Services on page 38](#)
- [Siebel Service Primary Web Services on page 39](#)
- [Siebel Order Management Primary Web Services on page 39](#)
- [Siebel Financial Services Primary Web Services on page 41](#)
- [Siebel Communications Primary Web Services on page 42](#)
- [Siebel CRM and UCM Integration Web Services on page 43](#)
- [Siebel Hospitality Primary Web Service on page 44](#)
- [Siebel Life Sciences Web Services on page 44](#)

Siebel Custom UI Primary Web Services

Table 5 lists the primary Siebel Custom UI Web services.

Table 5. Primary Siebel Custom UI Web Services

Web Service Name	Namespace	Type
ProductSearchService	http://siebel.com/CustomUI	Inbound
RetrieveAttachmentService	http://siebel.com/CustomUI	Inbound
searchSolution	http://siebel.com/CustomUI	Inbound
MktgDeduplicationService	http://siebel.com/CustomUI	Inbound

Table 5. Primary Siebel Custom UI Web Services

Web Service Name	Namespace	Type
WC_PickList_Payment_Profile_BS	http://siebel.com/CustomUI	Inbound
Universal Inbox	http://siebel.com/CustomUI	Inbound
SiebelWebPasswdMgmtService	http://siebel.com/CustomUI	Inbound
SiebelWebRegistrationService	http://siebel.com/CustomUI	Inbound
SiebelWebRespMgmt	http://siebel.com/CustomUI	Inbound
PDSOrderHeader	http://siebel.com/CustomUI	Inbound
UInbox Contact Item	http://siebel.com/CustomUI	Inbound

Siebel Self-Service Primary Web Services

Table 6 lists the primary Self-Service Web services.

Table 6. Primary Siebel Self-Service Web Services

Web Service Name	Namespace	Type
SelfServiceAccount	http://siebel.com/SelfService/Common/Account	Inbound
SelfServiceAccountRootPath	http://siebel.com/SelfService/Common/Account	Inbound
SelfServiceAllAccountsList	http://siebel.com/SelfService/Common/Account	Inbound
SelfServiceContact	http://siebel.com/SelfService/Common/Contact	Inbound
SelfServicePaymentHistory	http://siebel.com/SelfService/eCommerce/Payment	Inbound
SelfServicePostLoginProcess	http://siebel.com/SelfService/Common/Login	Inbound
SelfServiceRegistration	http://siebel.com/SelfService/Common/Registration	Inbound
SelfServiceResponsibility	http://siebel.com/SelfService/Common/Responsibility	Inbound
SelfServiceSmtEmail	http://siebel.com/SelfService/Common/Utility	Inbound
SelfServiceTemplateEmail	http://siebel.com/SelfService/Common/Utility	Inbound
SelfServiceTimeZone	http://siebel.com/SelfService/Common/Utility	Inbound

Table 6. Primary Siebel Self-Service Web Services

Web Service Name	Namespace	Type
SelfServiceUser	http://siebel.com/SelfService/Common/User	Inbound
SelfServiceWebSite	http://siebel.com/SelfService/Common/Setup	Inbound

Siebel Marketing Primary Web Services

Table 7 lists the primary Siebel Marketing Web services.

Table 7. Primary Siebel Marketing Web Services

Web Service Name	Namespace	Type
Account	http://siebel.com/marketing/account	Inbound
Contact	http://siebel.com/marketing/contact	Inbound
CreateLeads	http://siebel.com/SocialMediaService	Inbound
GetCampaigns	http://siebel.com/SocialMediaService	Inbound
LeadService	http://siebel.com/marketing/leads	Inbound
LeadProcessingService	http://siebel.com/marketing/leads	Inbound
List	http://siebel.com/marketing/list	Inbound
ListMgmtProspect	http://siebel.com/marketing/prospect	Inbound
MktgImportService	http://siebel.com/marketing/webmarketing	Inbound
GetMktgWebSurvey	http://siebel.com/marketing/webmarketing	Inbound
Response	http://siebel.com/marketing/response	Inbound
WebMarketing	http://siebel.com/marketing/webmarketing	Inbound

Siebel Loyalty Primary Web Services

Table 8 lists the primary Siebel Loyalty Web services.

Table 8. Primary Siebel Loyalty Web Services

Web Service Name	Namespace	Type
LoyaltyAccrualService	http://siebel.com/Loyalty/LoyaltyAccrualService	Inbound
LoyaltyBatchEnrollment	http://siebel.com/Loyalty/LoyaltyEnrollmentServices	Inbound

Table 8. Primary Siebel Loyalty Web Services

Web Service Name	Namespace	Type
LoyaltyImportBusinessService	http://siebel.com/Loyalty/LoyaltyImportService	Inbound
LoyaltyMemberService	http://siebel.com/Loyalty/LoyaltyMemberServices	Inbound
LoyaltyRedemptionService	http://siebel.com/Loyalty/LoyaltyRedemptionService	Inbound
LoyaltyVoucherService	http://siebel.com/Loyalty/LoyaltyVoucherService	Inbound

Siebel Service Primary Web Services

Table 9 lists the primary Siebel Service Web services.

Table 9. Primary Siebel Service Web Services

Web Service Name	Namespace	Type
ServiceRequest	http://siebel.com/Service/ServiceReqs	Inbound

Siebel Order Management Primary Web Services

Table 10 lists the primary Siebel Order Management Web services.

Table 10. Primary Siebel Order Management Web Services

Web Service Name	Namespace	Type
OrderDetailWebService	http://siebel.com/OrderManagement/Order/Details	Inbound
CatalogWebService	http://siebel.com/OrderManagement/Catalog	Inbound
CalculatePriceWS	http://siebel.com/OrderManagement/Quote/PSP	Inbound
PriceListsWS	http://siebel.com/OrderManagement/PriceLists	Inbound
QueryTransportationSalesOrderItineraryListSiebelReqABCImpl	http://xmlns.oracle.com/ABCImpl/Siebel/CoreQueryTransportationSalesOrderItineraryListSiebelReqABCImpl/V1	Outbound
QuoteCheckOutWebService	http://siebel.com/OrderManagement/Quote/Quoting	Inbound

Table 10. Primary Siebel Order Management Web Services

Web Service Name	Namespace	Type
QuoteDetailWebService	http://siebel.com/OrderManagement/Quote/Details	Inbound
QuotingWebService	http://siebel.com/OrderManagement/Quote/Quoting	Inbound
ABOWebService	http://siebel.com/OrderManagement/ABO	Inbound
Siebel Product Configurator Web Service	http://siebel.com/OrderManagement/Configurator	Inbound
PromotionWebService	http://siebel.com/OrderManagement/Promotion	Inbound
SessionAccessWS	http://www.siebel.com/xml/SessionAccess	Inbound
SWIAdminISSAttributeDefnIO	http://siebel.com/asi	Inbound
SWIAdminISSClassDefintionIO	http://siebel.com/asi	Inbound
SWILocationServices	http://siebel.com/asi/V0	Inbound
SWILocationSync	http://siebel.com/asi	Inbound
SWIISSPriceListItemIO	http://siebel.com/asi	Inbound
SWIOrderUpsert	http://siebel.com/asi	Inbound
SWI Price List IO	http://siebel.com/asi	Inbound
SWIProductImport	http://siebel.com/asi/VO	Inbound
SWISubmitOrder	http://siebel.com/asi	Outbound
SWISyncProduct	http://siebel.com/asi	Inbound
CalculateShippingChargeSalesOrderSiebelReqABCImpl	http://xmlns.oracle.com/ABCImpl/Siebel/Core/CalculateShippingChargeSalesOrderSiebelReqABCImpl/V1	Outbound
CheckATPSalesOrderSiebelReqABCImpl	http://xmlns.oracle.com/ABCImpl/Siebel/Core/CalculateShippingChargeSalesOrderSiebelReqABCImpl/V1	Outbound
ConfiguratorUserLangSiebelAdapter	http://xmlns.oracle.com/ConfiguratorUserLangSiebelAdapter	Outbound
CreditCheckSalesOrderSiebelReqABCImpl	http://xmlns.oracle.com/ABCImpl/Siebel/Core/CreditCheckSalesOrderSiebelReqABCImpl/V1	Outbound

Table 10. Primary Siebel Order Management Web Services

Web Service Name	Namespace	Type
PaymentAuthorizationSalesOrderSiebelReqABCImpl	http://xmlns.oracle.com/ABCImpl/Siebel/Core/PaymentAuthorizationSalesOrderSiebelReqABCImpl/V1	Outbound
SWIProductAttributeImport	http://siebel.com/asi/	Inbound
SWIProductClassImport	http://siebel.com/asi/	Inbound
SWIPromotionIntegration	http://siebel.com/asi/	Inbound
SWIQuoteUpsert	http://siebel.com/asi/	Inbound
SWISubmitOrder_o2c	http://siebel.com/asi/	Outbound
SWISubmitOrder_o2c	http://siebel.com/asi/	Outbound
ISS Web Commerce Export Attributes	http://siebel.com/asi/	Inbound
ISS Web Commerce Export Class	http://siebel.com/asi/	Inbound
ISS Web Commerce Export Contents	http://siebel.com/asi/	Inbound
ISS Web Commerce Export Error	http://siebel.com/asi/	Inbound
ISS Web Commerce Export Price Lists	http://siebel.com/asi/	Inbound
ISS Web Commerce Export Recommended Products	http://siebel.com/asi/	Inbound
ISS Web Commerce Export Volume Discounts	http://siebel.com/asi/	Inbound
SCOAExportWS	http://service.scoa.oracle.com/	Outbound

Siebel Financial Services Primary Web Services

Table 11 lists the primary Siebel Financial Services Web services.

Table 11. Siebel Financial Services Primary Web Services

Web Service Name	Namespace	Type
AssetManagementComplex	http://www.siebel.com/Service/FS/Assets	Inbound
FS Asset Warranty Service	http://siebel.com/Service/AssetWarranty	Inbound

Siebel Communications Primary Web Services

Table 12 lists the primary Siebel Communications Web services.

Table 12. Siebel Communications Primary Web Services

Web Service Name	Namespace	Type
AccountBalanceSiebelCommsReqABCS	http://xmlns.oracle.com/ABCS/Siebel/Industry/Communications/AccountBalanceSiebelCommsReqABCS/V1	Inbound
AdjustmentSiebelCommsReqABCS	http://xmlns.oracle.com/ABCS/Siebel/Industry/Communications/AdjustmentSiebelCommsReqABCS/V1	Inbound
CMU Account Query	http:siebel.com/asi/	Inbound
CMU Account Update	http:siebel.com/asi/	Inbound
ISS Price List Item WS	http:siebel.com/asi/	Inbound
SWI Update Order Line Item	http:siebel.com/asi/	Inbound
AccountBalanceSiebel ReqABCS_Service	http://xmlns.oracle.com/ABCS/Siebel/Industry/Communications/AccountBalanceSiebelCommsReqABCS/V1	Outbound
AdjustmentSiebel ReqABCS_Service	http://xmlns.oracle.com/ABCS/Siebel/Industry/Telco/AdjustmentSiebelReqABCS/V1	Outbound
InvoiceSiebelCommsReqABCS	http://xmlns.oracle.com/ABCS/Siebel/Industry/Communications/InvoiceSiebelCommsReqABCS/V1	Outbound
PaymentSiebelCommsReqABCS_Service	http://xmlns.oracle.com/ABCSImpl/Siebel/Industry/Communications/PaymentSiebelCommsReqABCS/V1	Outbound
UnbilledUsageSiebelCommsReqABCS_Service	http://xmlns.oracle.com/ABCS/Siebel/Industry/Communications/UnbilledUsageSiebelCommsReqABCS/V1	Outbound
InvoiceSiebelCommsReqABCS	http://xmlns.oracle.com/ABCS/Siebel/Industry/Communications/InvoiceSiebelCommsReqABCS/V1	Outbound
PaymentSiebelCommsReqABCS	http://xmlns.oracle.com/ABCSImpl/Siebel/Industry/Communications/PaymentSiebelCommsReqABCS/V1	Outbound

Table 12. Siebel Communications Primary Web Services

Web Service Name	Namespace	Type
ProcessSalesOrderSiebelCommsJMSProducer	http://xmlns.oracle.com/ABCS/Industry/Comms/SalesOrder/ProcessSalesOrderSiebelCommsJMSProducer/V1	Outbound
SWIAdjustmentStatusUpdate	http://siebel.com/asi/	Inbound
SWIContactServices	http://siebel.com/asi/V0	Inbound
SWICreateAdjustment	http://siebel.com/asi	Outbound
SWICustomerParty	http://siebel.com/asi/V0	Inbound
SyncCustomerSiebelEventAggregator	http://xmlns.oracle.com/ABCS/Siebel/Core/SyncCustomerSiebelEventAggregator/V1	Outbound
SWISpecialRatingList	http://siebel.com/asi	Outbound
SWITroubleTicket	http://siebel.com/asi	Inbound
SWI Update Order Line Item	http://siebel.com/asi/	Inbound
UnbilledUsageSiebelCommsReqABCS	http://xmlns.oracle.com/ABCS/Siebel/Industry/Communications/UnbilledUsageSiebelCommsReqABCS/V1	Outbound
UpdateCustomerSiebelJMSProducer	http://xmlns.oracle.com/ABCS/Siebel/Industry/Telco/UpdateCustomerSiebelJMSProducer/V1	Outbound
UpdateCreditAlertSiebelCommsReqABCImpl	http://xmlns.oracle.com/ABCImpl/Siebel/Industry/Comms/UpdateCreditAlertSiebelCommsReqABCImpl/V1	Outbound

Siebel CRM and UCM Integration Web Services

Table 13 lists the primary Web services for integration between Siebel CRM and Siebel Universal Customer Master (UCM).

Table 13. Siebel CRM and Siebel UCM Integration Primary Web Services

Web Service Name	Namespace	Type
FetchAccountSiebelReqABCImpl	http://xmlns.oracle.com/ABCImpl/Siebel/Core/FetchAccountSiebelReqABCImpl/V1	Outbound
FetchContactSiebelReqABCImpl	http://xmlns.oracle.com/ABCImpl/Siebel/Core/FetchContactSiebelReqABCImpl/V1	Outbound

Table 13. Siebel CRM and Siebel UCM Integration Primary Web Services

Web Service Name	Namespace	Type
MatchAccountSiebelReqABCImpl	http://xmlns.oracle.com/ABCImpl/Siebel/Core/MatchAccountSiebelReqABCImpl/V1	Outbound
MatchContactSiebelReqABCImpl	http://xmlns.oracle.com/ABCImpl/Siebel/Core/MatchContactSiebelReqABCImpl/V1	Outbound
SWIContactServices	http://siebel.com/asi/V0	Inbound
SWICustomerParty	http://siebel.com/asi/V0	Inbound
SWIMergeServices	http://siebel.com/asi	Inbound
SWIProductImport	http://siebel.com/asi/V0	Inbound
SyncCustomerSiebelEventAggregator	http://xmlns.oracle.com/ABCS/Siebel/Core/SyncCustomerSiebelEventAggregator/V1	Outbound

Siebel Hospitality Primary Web Service

Table 14 lists the primary Siebel Hospitality Web services.

Table 14. Primary Siebel Hospitality Web Services

Web Service Name	Namespace	Type
TNT History Oppty Insert	http://www.siebel.com/asi	Inbound

Siebel Life Sciences Web Services

Table 15 lists the primary Siebel Life Sciences Web services.

Table 15. Primary Siebel Life Sciences Web Services

Web Service Name	Namespace	Type
ClinicalSubject	http://siebel.com/ClinicalSubject/asi	Inbound
LSSGOP_Account	http://siebel.com/asi/	Inbound
LSSGOP_AccountAddress	http://siebel.com/asi/	Inbound
LSSGOP_Activity	http://siebel.com/asi/	Inbound
LSSGOP_ActivityContact	http://siebel.com/asi/	Inbound
LSSGOP_CatalogCategory	http://siebel.com/asi/	Inbound
LSSGOP_Contact	http://siebel.com/asi/	Inbound
LSSGOP_ContactAccount	http://siebel.com/asi/	Inbound
LSSGOP_ContactAddress	http://siebel.com/asi/	Inbound
LSSGOP_ContactBestTime	http://siebel.com/asi/	Inbound

Table 15. Primary Siebel Life Sciences Web Services

Web Service Name	Namespace	Type
LSSGOP_ContactLicense	http://siebel.com/asi/	Inbound
LSSGOP_CurrentUser	http://siebel.com/asi/	Inbound
LSSGOP_LanguageLOV	http://siebel.com/asi/	Inbound
LSSGOP_Literature	http://siebel.com/asi/	Inbound
LSSGOP_Literature_ALL	http://siebel.com/asi/	Inbound
LSSGOP_LiteratureCatalog	http://siebel.com/asi/	Inbound
LSSGOP_MessagePlan	http://siebel.com/asi/	Inbound
LSSGOP_MessagePlan_ALL	http://siebel.com/asi/	Inbound
LSSGOP_MessagePlanCatalog	http://siebel.com/asi/	Inbound
LSSGOP_MessageResponse	http://siebel.com/asi/	Inbound
LSSGOP_MsgPlanItem	http://siebel.com/asi/	Inbound
LSSGOP_MsgPlanItem_ALL	http://siebel.com/asi/	Inbound
LSSGOP_MsgPlanItemRelation	http://siebel.com/asi/	Inbound
LSSGOP_MsgPlanItemRelation_ALL	http://siebel.com/asi/	Inbound
LSSGOP_PersonalList	http://siebel.com/asi/	Inbound
LSSGOP_PositionContactAddress	http://siebel.com/asi/	Inbound
LSSGOP_Product	http://siebel.com/asi/	Inbound
LSSGOP_ProductIndication	http://siebel.com/asi/	Inbound
LSSGOP_ProductsDetailed	http://siebel.com/asi/	Inbound
LSSGOP_PromotionalItemsDropped	http://siebel.com/asi/	Inbound
LSSGOP_RelatedAccount	http://siebel.com/asi/	Inbound
LSSGOP_RelatedContact	http://siebel.com/asi/	Inbound
LSSGOP_RelatedLiterature	http://siebel.com/asi/	Inbound
LSSGOP_RetailObjective	http://siebel.com/asi/	Inbound
LSSGOP_Revenue	http://siebel.com/asi/	Inbound
LSSGOP_SampleDisclaimer	http://siebel.com/asi/	Inbound
LSSGOP_SampleDropped	http://siebel.com/asi/	Inbound
LSSGOP_SampleInventory	http://siebel.com/asi/	Inbound
LSSGOP_SampleTransaction	http://siebel.com/asi/	Inbound
LSSGOP_Signature	http://siebel.com/asi/	Inbound
LSSGOP_TransactionItem	http://siebel.com/asi/	Inbound

Table 15. Primary Siebel Life Sciences Web Services

Web Service Name	Namespace	Type
ModificationTracking	http://siebel.com/asi/	Inbound
LSSGOP_ModificationTrackingPurge	http://siebel.com/asi/	Inbound
SWILSClinicalActivityTemplate	http://siebel.com/asi/	Inbound
SWILSClinicalCreateSiteVisitGeo Location	http://siebel.com/CustomUI	Inbound
SWILSClinicalGetEmployees	http://siebel.com/asi/	Inbound
SWILSClinicalGetSiteContacts	http://siebel.com/asi/	Inbound
SWILSClinicalGetStateModelService	http://siebel.com/asi/	Inbound
SWILSClinicalGetSubjectVisitDetails	http://siebel.com/asi/	Inbound
SWILSClinicalInsertEmployees	http://siebel.com/asi/	Inbound
SWILSClinicalListOfValues	http://siebel.com/asi/	Inbound
SWILSClinicalProtocolSiteGetSites	http://siebel.com/CustomUI	Inbound
SWILSClinicalQueryProtocolSite_SiteVisits	http://siebel.com/CustomUI	Inbound
SWI LS Clinical Payments Inbound	http://siebel.com/CustomUI	Inbound
SWILSClinicalTripReportInterface Service	http://siebel.com/asi/	Inbound
SWI LS Medical Product Issue Create Inbox Item Inbound	http://siebel.com/CustomUI	Inbound
SWI LS Medical Update Product Issue Inbound	http://siebel.com/CustomUI	Inbound
SWILSClinicalGetSiteSnapshot	http://siebel.com/CustomUI	Inbound
SWILSClinicalGetSmartScript Details	http://siebel.com/CustomUI	Inbound
SWILSClinicalTripReportTemplates	http://siebel.com/CustomUI	Inbound
LS Clinical CRF Tracking Interface	http://siebel.com/asi/	Inbound
LS Clinical Protocol Site Interface	http://siebel.com/asi/	Inbound
LS Clinical Subject Information Interface Service	http://siebel.com/asi/	Inbound

ABOWebService

NOTE: This version of ABOWebService is available only for implementations of Siebel CRM from version 8.1 and later. To use ABOWebService with Siebel CRM version 8.0, see version 8.0 of *Siebel CRM Web Services Reference*.

Use this Web service to make available the following Asset-Based Ordering (ABO) functions: convert a quote into an order, submit an order to the back-end office, convert a completed order line item to an asset, modify an asset, disconnect an asset, suspend, or resume an asset. This Web service works only with an Asset-Based Ordering (ABO) enabled environment. A typical application that uses the Web service is Siebel Communication.

ABOWebService Operations

The asset operations Modify, Disconnect, Suspend, or Resume create a new line item, based on the account or contact profile. They have a similar input and output data schema. If AccountId is provided, then the Web service operates on the account profile. If AccountId is not provided, then it operates on the contact profile.

Affixing ToQuote in the Web service name means: if an active quote is provided, then the Web service adds the quote item to the existing quote. If an active quote is not provided, then the Web service generates a new quote and adds the quote item to the new quote.

Affixing ToOrder in the Web service name means: if an active order is provided, then the Web service adds the order item to the existing order. If an active order is not provided, then the Web service generates a new order and adds the order item to the new order. For a list of operations associated with this Web service, see [Table 16](#).

Table 16. ABOWebService Operations

Name	Description
AutoOrder	Converts a Quote to a Sales Order.
SubmitOrder	Submits an Order.
AutoAsset	Creates assets from the completed order line items or updates a current asset.
ModifyAssetToQuote	Modifies a Service Item asset, and generates a quote item to update the selected asset.
ModifyAssetToOrder	Modifies a Service Item asset, and generates an order item to update the selected asset.
DisconnectAssetToQuote	Disconnects a Service Item asset to generate a quote item to deactivate the selected asset.
DisconnectAssetToOrder	Disconnects a Service Item asset, and generates an order item to deactivate the selected asset.
SuspendAssetToQuote	Suspends an active a Service Item asset to generate a quote item to suspend the selected asset.
SuspendAssetToOrder	Suspends a Service Item asset and generates an order item to suspend the selected asset.
ResumeAssetToQuote	Resumes a suspended a Service Item asset to generate a quote item to resume the selected asset.
ResumeAssetToOrder	Resumes a Service Item asset, and generates an order item to resume the selected asset.

Request Message Description: AutoOrder

The following Web service operations AutoOrder, SubmitOrder, ModifyAssetToOrder, SuspendAssetToOrder, ResumeAssetToOrder, and DisconnectAssetToOrder share a common output message format: PDS Order.

ModifyAssetToOrder, SuspendAssetToOrder, ResumeAssetToOrder, DisconnectAssetToOrder share a common request message format.

ModifyAssetToQuote, SuspendAssetToQuote, ResumeAssetToQuote and DisconnectAssetToQuote share a common request message format, and a common response message format, PDS Quote.

For a description of this request message, see [Table 17](#).

Table 17. Request Message: AutoOrder

Node	Description
Object Id	Required. Row ID of the quote to be converted to the Sale Order.
Skip Query Order	Allows the calling application to skip querying the modified or new Order back to the calling Web service after the Auto Order operation is performed.

Response Message Description: AutoOrder

The integration object message format is PDS Order. For a description of this response message, see [Table 18](#).

Table 18. Response Message: AutoOrder

Node	Description
PDS Order	Instance of the integration object PDS Order.
Header	Order Header.
Line Item	Order Line Items.
XA	Order Line Item attributes.

Request Message Description: SubmitOrder

For a description of this request message, see [Table 19](#).

Table 19. Request Message: SubmitOrder

Node	Description
OrderId	Required. RowId of the order to be submitted.

Response Message Description: SubmitOrder

integration object message format: PDS Order, which has the same format as the AutoOrder response message.

Request Message Description: AutoAsset

For a description of this request message, see [Table 20](#).

Table 20. Request Message; AutoAsset

Node	Description
Object Id	Required. RowId of the corresponding Order that contains the Order Line Item to be converted or applied to an asset.
LineItemId	Required. RowId of an Order Line Item to be converted or applied to an asset.

Response Message Description: AutoAsset

This integration object message format is PDS Asset. For a description of this response message, see [Table 21](#).

Table 21. Response Message: AutoAsset

Node	Description
PDS Asset	Required. Integration object.
Header	Asset header.
Line Item	Asset
XA	Asset attributes

Request Message Description: ModifyAssetToQuote

For a description of this request message, see [Table 22](#)

Table 22. Request Message: ModifyAssetToQuote

Node	Description
AssetIntegrationId	Asset integration ID of the selected asset. Provide either AssetIntegrationId or AssetNumber.
AssetNumber	Asset integration ID of the selected asset. Provide either AssetIntegrationId or AssetNumber.
ActiveDocumentId	A document in SiebelOrder Management which refers to either a quote or an order. Each Document can have multiple children, that is Quote Items, or Order Line Items. ActiveDocumentId refers to the current active Document that the current process is working on. In this Web service call, it is the Quote ID of the active Quote to which the generated quote item has to be added. This is an optional input.
AccountId	Account ID of the account that owns the selected Service Item asset.
ContactId	Contact ID of the contact who owns the selected Service Item asset to be modified.

Table 22. Request Message: ModifyAssetToQuote

Node	Description
DueDate	The due date of the generated line item.
PriceListId	Specifies a Price List ID that is associated with the quote if a new quote is requested to generate.
CompoundProductNumber	Compound Product Number for the Asset Based Ordering (ABO) network ordering. It is not required if network ordering is not used.
PriceOnSync	Passed down to the sub-process SIS OM Edit Complex Asset Workflow to the step SIS OM PMT Service 'Synchronize' step to trigger a reprice if necessary.

Response Message Description: ModifyAssetToQuote

The integration object message format is PDS Quote. For a description of this response message, see [Table 23](#).

Table 23. Response Message; ModifyAssetToQuote

Node	Description
PDS Quote	Required. Integration object.
Header	Quote header.
Line Item	Quote line item.
XA	Quote line item attributes.

Request Message Description: ModifyAssetToOrder

For a description of this request message, see [Table 24](#).

Table 24. Request Message: ModifyAssetToOrder

Node	Description
AssetIntegrationId	Asset integration ID of the selected asset. Provide either AssetIntegrationId or AssetNumber.
AssetNumber	Asset integration ID of the selected asset. Provide either AssetIntegrationId or AssetNumber.
ActiveDocumentId	A document in Siebel Order Management which refers to either a quote or an order. Each Document can have multiple children, which are Quote Items or Order Line Items. ActiveDocumentId refers to the current active document that the current process is working on. In this Web service call, it is the Quote ID of the active Quote to which the generated quote item has to be added. This is an optional input.
AccountId	Account ID of the account that owns the selected Service Item asset.

Table 24. Request Message: ModifyAssetToOrder

Node	Description
ContactId	Contact ID of the contact who owns the selected Service Item asset to be modified.
DueDate	The due date of the generated line item.
PriceListId	Specifies a Price List ID associated with the quote if a new quote is requested.
CompoundProduct Number	Compound Product Number for ABO network ordering. It is required only if network ordering is used.

Response Message Description: ModifyAssetToOrder

Integration object message format: PDS Order, which has the same format as the AutoOrder response message.

Request Message Description: SuspendAssetToQuote

This is the same request message as ModifyAssetToQuote.

Response Message Description: SuspendAssetToQuote

Integration object message format: PDS Quote.

Request Message Description: SuspendAssetToOrder

This is the same request message as ModifyAssetToOrder.

Response Message Description: SuspendAssetToOrder

Integration object message format: PDS Order.

Request Message Description: ResumeAssetToQuote

This is the same request message as ModifyAssetToQuote.

Response Message Description: ResumeAssetToQuote

Integration object message format: PDS Quote.

Request Message Description: ResumeAssetToOrder

This is the same request message as ModifyAssetToOrder.

Response Message Description: ResumeAssetToOrder

Integration object message format: PDS Order.

Request Message Description: DisconnectAssetToQuote

This is the same request message as ModifyAssetToQuote.

Response Message Description: DisconnectAssetToQuote

Integration object message format: PDS Quote.

Request Message Description: DisconnectAssetToOrder

This is the same request message as ModifyAssetToOrder.

Response Message Description: DisconnectAssetToOrder

Integration object message format: PDS Order.

ABOWebService Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 25](#).

Table 25. ABOWebService Application Interface

Name	Boundary Object Type	Class (if Business Service)
SISOMAutoOrderWebService	Workflow	Not applicable
SISOMSubmitWebService	Workflow	Not applicable
SISOMAutoAssetWebService	Workflow	Not applicable
SISOMModifyWebService-Quote	Workflow	Not applicable
SISOMModifyWebService-Order	Workflow	Not applicable
SISOMSuspendWebService-Quote	Workflow	Not applicable
SISOMSuspendWebService-Order	Workflow	Not applicable
SISOMResumeWebService-Quote	Workflow	Not applicable
SISOMResumeWebService-Order	Workflow	Not applicable
SISOMDisconnectWebService-Quote	Workflow	Not applicable
SISOMDisconnectWebService-Order	Workflow	Not applicable

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 26](#).

Table 26. ABOWebService Data Objects

Siebel Repository Name	External Name
PDS Quote	PDS Quote
PDS Order	PDS Order
PDS Asset	PDS Asset

Example Package for ABOWebService

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request (AutoOrder)

See the following file to view the sample code:

```
... \ABOWebService\AutoOrder_request.xml
```

Response (AutoOrder)

See the following file to view the sample code:

```
... \ABOWebService\AutoOrder_response.xml
```

Request (ModifyAssetToQuote)

See the following file to view the sample code:

```
... \ABOWebService\ModifyAssetToQuote_request.xml
```

Response (ModifyAssetToQuote)

See the following file to view the sample code:

```
... \ABOWebService\ModifyAssetToQuote_response.xml
```

Request (AutoAsset)

See the following file to view the sample code:

```
... \ABOWebService\AutoAsset_request.xml
```

Response (AutoAsset)

See the following file to view the sample code:

```
... \ABOWebService\AutoAsset_response.xml
```

Interface Description (WSDL) for ABOWebservice

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \ABOWebservice\ABOWebservice.wsdl

Account

Use this Web service for the basic Siebel Marketing operations such as creating and updating accounts.

Account Operations

There are two operations associated with this Web service which allow you to create and update accounts in Marketing. For a list of operations associated with this Web service, see [Table 27](#).

Table 27. Account Operations

Name	Description
AccountCreateAccount	Creates an account.
AccountUpdateAccount	Updates an existing account.

Request Message Description: AccountCreateAccount

For a description of this request message, see [Table 28](#).

Table 28. Request Message Description: AccountCreateAccount

Node	Description	Type
Account IO	Required. An instance of the integration object Account. Account is the Parent header and Account_BusinessAddress is the child.	Integration Object

Response Message Description: AccountCreateAccount

For a description of this response message, see [Table 29](#).

Table 29. Response Message Description: AccountCreateAccount

Node	Description	Type
Account Id	The new Account ID generated as a result of the new account creation.	String
Error Message	Error message if any.	String
Success Flag	Flag to indicate success or failure of the operation.	String

Request Message Description: AccountUpdateAccount

For a description of this request message, see [Table 30](#).

Table 30. Request Message Description: AccountUpdateAccount

Node	Description	Type
Account IO	Required. An instance of the integration object Account. Account is the Parent header and Account_BusinessAddress is the child.	Integration Object

Response Message Description: AccountUpdateAccount

For a description of this response message, see [Table 31](#).

Table 31. Response Message Description: AccountUpdateAccount

Node	Description	Type
Error Message	Error message if any.	String
Success Flag	Flag to indicate success or failure of the operation.	String

Account Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 32](#).

Table 32. Account Application Interface

Name	Boundary Object Type
Account	Business Service

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 33](#).

Table 33. Account Data Object

Siebel Repository Name	External Name
Account IO	Account IO

Example Package for Account

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request (AccountCreate)

See the following file to view the sample code:

```
... \Account\AccountCreate_request.xml
```

Response (AccountCreate)

See the following file to view the sample code:

```
... \Account\AccountCreate_response.xml
```

Request (AccountUpdate)

See the following file to view the sample code:

```
... \Account\AccountUpdate_request.xml
```

Response (AccountUpdate)

See the following file to view the sample code:

```
... \Account\AccountUpdate_response.xml
```

Interface Description (WSDL) for Account

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \Account\Account.wsdl
```

AccountBalanceSiebelCommsReqABCS

Use this outbound Web service to query for account balance details in Oracle Communications Bill and Revenue Management and display it in the Billing view in Siebel Communications.

AccountBalanceSiebelCommsReqABCS Operations

For a list of operations associated with this Web service, see [Table 34](#).

Table 34. AccountBalanceSiebelCommsReqABCS operations

Name	Description
QueryBalanceSummary	Queries the balance summary for the billing profile in the Billing view in Siebel Communications.
QueryBalanceGroupList	Queries the balance group list for the billing profile in the Billing view in Siebel Communications.
QueryBalanceDetails	Queries the balance details for the billing profile in the Billing view in Siebel Communications.
QueryBalanceGroupServices	Queries the balance group services for the billing profile in the Billing view in Siebel Communications.

Request Message Description: QueryBalanceSummary

For a description of this request message, see [Table 35](#).

Table 35. Request Message Description: QueryBalanceSummary

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
QueryBalanceSummaryReqMsg:ListOfCmuRequestBillingProfileIo	Optional	Integration Object

Response Message Description: QueryBalanceSummary

For a description of this response message, see [Table 36](#).

Table 36. Response Message Description: QueryBalanceSummary

Node	Description	Type
QueryBalanceSummaryRespMsg:ListOfCmuBalanceSummaryResponseIo	Optional	Integration Object
SiebelFaultMsg:Fault	Optional	Integration Object

Request Message Description: QueryBalanceGroupList

For a description of this request message, see [Table 37](#).

Table 37. Request Message Description: QueryBalanceGroupList

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
QueryBalanceGroupListReqMsg:ListOfCmuRequestBillingProfileIo	Optional	Integration Object

Response Message Description: QueryBalanceGroupList

For a description of this response message, see [Table 38](#).

Table 38. Response Message Description: QueryBalanceGroupList

Node	Description	Type
QueryBalanceGroupListRespMsg:ListOfSwiBalanceGroupIoRes	Optional	Integration Object
SiebelFaultMsg:Fault	Optional	Integration Object

Request Message Description: QueryBalanceDetails

For a description of this request message, see [Table 39](#).

Table 39. Request Message Description: QueryBalanceDetails

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
QueryBalanceDetailsReqMsg:ListOfSwiBillingGroupDetailIoReq	Optional	Integration Object

Response Message Description: QueryBalanceDetails

For a description of this response message, see [Table 40](#).

Table 40. Response Message Description: QueryBalanceDetails

Node	Description	Type
QueryBalanceDetailsRespMsg:ListOfSwiBillingGroupDetailIoRes	Optional	Integration Object
SiebelFaultMsg:Fault	Optional	Integration Object

Request Message Description: QueryBalanceGroupServices

For a description of this request message, see [Table 41](#).

Table 41. Request Message Description: QueryBalanceGroupService

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
QueryBalanceGroupServicesReqMsg:ListOfSwiBillingGroupDetailIoReq	Optional	Integration Object

Response Message Description: QueryBalanceGroupServices

For a description of this response message, see [Table 42](#).

Table 42. Response Message Description: QueryBalanceGroupService

Node	Description	Type
QueryBalanceGroupServicesRespMsg:ListOfSwiBalanceGroupServicesIoRes	Optional	Integration Object
SiebelFaultMsg:Fault	Optional	Integration Object

AccountBalanceSiebelCommsReqABCS Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 43](#).

Table 43. AccountBalanceSiebelCommsReqABCS Service Object

Name	Boundary Object Type	Class
AccountBalanceSiebelCommsReqABCS	Business Service	CSSWSOutboundDispatcher

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 44](#).

Table 44. AccountBalanceSiebelCommsReqABCS Data Object

Siebel Repository Name	External Name
SWIBalanceGroupServicesIORes	Account
SWIBillingGroupDetailIOReq	Account
CMU Request Billing Profile IO	Account

Table 44. AccountBalanceSiebelCommsReqABCS Data Object

Siebel Repository Name	External Name
CMU Balance Summary Response IO	Account
SWIBalanceGroupIORes	Account
SWIBillingGroupDetailIORes	Account
Fault	Fault

Methods

For a description of the methods for this Web service, see [Table 45](#).

Table 45. AccountBalanceSiebelCommsReqABCS Methods

Operation	Method
QueryBalanceSummary	QueryBalanceSummary
QueryBalanceGroupList	QueryBalanceGroupList
QueryBalanceDetails	QueryBalanceDetails
QueryBalanceGroupServices	QueryBalanceGroupServices

Example Package for AccountBalanceSiebelCommsReqABCS

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

... \AccountBalanceSiebelCommsReqABCS \Request

Response

See the following file to view the sample code:

... \AccountBalanceSiebelCommsReqABCS \Response

Interface Description (WSDL) for AccountBalanceSiebelCommsReqABCS

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \AccountBalanceSiebelCommsReqABCS \WSDL

AdjustmentSiebelCommsReqABCS

Use this outbound Web service to query for adjustments made to a bill in the external Oracle Communications Billing and Revenue Management application that will be displayed in the Billing view in Siebel Communications.

AdjustmentSiebelCommsReqABCS Operations

For a list of operations associated with this Web service, see [Table 46](#).

Table 46. AdjustmentSiebelCommsReqABCS Operations

Name	Description
QueryAdjustment	Queries the adjustment details in the Billing view in Siebel Communications.
CreateAdjustment	Creates adjustments. (currently not used.)

Request Message Description: QueryAdjustment

For a description of this request message, see [Table 47](#).

Table 47. Request Message Description: QueryAdjustment

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
QueryAdjustmentReqMsg:ListOfCmuRequestBilledUsageIo	Optional	Integration Object

Response Message Description: QueryAdjustment

For a description of this response message, see [Table 48](#).

Table 48. Response Message Description: QueryAdjustment

Node	Description	Type
QueryAdjustmentRespMsg:ListOfCmuResponseBilledUsageArItemsIo	Optional	Integration Object
SiebelFaultMsg:Fault	Optional	Integration Object

Request Message Description: CreateAdjustment

For a description of this request message, see [Table 49](#).

Table 49. Request Message Description: CreateAdjustment

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
CreateAdjustmentReqMsg:ListOfCmuRequestAdjustmentIo	Optional	Integration Object

Response Message Description: CreateAdjustment

For a description of this response message, see [Table 50](#).

Table 50. Response Message Description: CreateAdjustment

Node	Description	Type
CreateAdjustmentRespMsg:ListOfCmuResponseAdjustmentIo	Optional	Integration Object
SiebelFaultMsg:Fault	Optional	Integration Object

AdjustmentSiebelCommsReqABCS Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 51](#).

Table 51. AdjustmentSiebelCommsReqABCS Service Objects

Name	Boundary Object Type	Class
AdjustmentSiebelCommsReqABCS	Business Service	CSSWSOutboundDispatcher

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 52](#).

Table 52. AdjustmentSiebelCommsReqABCS Data Objects

Siebel Repository Name	External Name
CMU Request Billed Usage IO	Account
CMU Response Billed Usage AR Items IO	Account
Fault	Fault

Methods

For a description of the methods for this Web service, see [Table 53](#).

Table 53. AdjustmentSiebelCommsReqABCS Methods

Operation	Method
QueryAdjustment	QueryAdjustment
CreateAdjustment	CreateAdjustment

Example Package for AdjustmentSiebelCommsReqABCS

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \AdjustmentSiebelCommsReqABCS\QueryAdjustmentRequestMessage.xml
```

Response

See the following file to view the sample code:

```
... \AdjustmentSiebelCommsReqABCS\QueryAdjustmentResponseMessage.xml
```

Interface Description (WSDL) for AdjustmentSiebelCommsReqABCS

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \AdjustmentSiebelCommsReqABCS\AdjustmentSiebelCommsReqABCS.wsdl
```

AssetManagementComplex

To display the detail of a promotion, customizable product, or bundle asset, for example, to display the related products for a promotion, the child items for a customizable product, or bundle asset.

AssetManagementComplex Operations

The following operations are used for the AssetManagementComplex Web service.

For a list of operations associated with this Web service, see [Table 54](#).

Table 54. AssetManagementComplex Operations

Name	Description
AssetManagementComplexQueryPageQuoteAddItems	The Web service fetches the details of promotion, customizable product or bundle asset.

Request Message Description: AssetManagementComplexQueryPage

Asset ManagementComplex Web service is called to query for the details of a promotion, customizable product, or bundle asset. Displays the related products for promotion, child items for a customizable product, or bundle asset.

For a description of this request message, see [Table 55](#).

Table 55. Request Message Description: AssetManagementComplexQueryPage

Node	Description	Type
AssetManagementComplex IO	Required	Integration Object
AssetDescription	List Price	String
AssetNumber	Adjusted Value	String
BillingAccount	Billing Account	String
BillingAccountId	Billing Account ID	String
InstallDate	Install Date	String
IntegrationId	Integration ID	String
OwnerContactId	Owner Contact ID	String
ProductDescription	Product Description	String
ProductId	Product ID	String
ProductName	Product Name	String
ProductPartNumber	Product Number	String
SerialNumber	Serial Number	String
ServiceAccount	Service Account	String
ServiceAccountId	Service Account ID	String
Status	Status	String
NRCCxTotal		String
MRCCxTotal		String
Id	ID	String
AdjustedListPrice	Adjusted List Price	String
AssetCurrencyCode	Asset Currency Code	String
AssetDescription	Asset Description	String
AssetId	Asset ID	String
AssetNumber	Asset Number	String
Comments	Comments	String
InstallDate	Install Date	String
IntegrationId	Integration ID	String
Name	Asset Name	String
ParentAssetId	Parent Asset ID	String
PriceType	Price Type	String

Table 55. Request Message Description: AssetManagementComplexQueryPage

Node	Description	Type
ProdPromId	Product Prom ID	String
ProductDefTypeCode	Product Def Type Code	String
ProductId	Product ID	String
ProductName	Product Name	String
ProductPartNumber	Product Part Number	String
ProductType	Product Type	String
Quantity2	Quantity	String
RootAssetId	Root Asset ID	String
UnitofMeasure	Unit of Measure	String
DataType	Asset Data Type	String
Description	Asset Description	String
DisplayName	Asset Display Name	String
Value	Asset Value	String

Response Message Description: AssetManagementComplexQueryPage

For a description of this response message, see [Table 56](#).

Table 56. Response Message Description: AssetManagementComplexQueryPage

Node	Description	Type
AssetDescription	Asset Description	String
AssetNumber	Asset Number	String
BillingAccount	Billing Account	String
BillingAccountId	Billing Account ID	String
InstallDate	Install Date	String
IntegrationId	Integration ID	String
OwnerContactId	Owner contact ID	String
ProductDescription	Product Description	String
ProdPromId	Product Prom ID	String
ProductDefTypeCode	Product Code	String
ProductId	Product ID	String
ProductName	Product Name	String
ProductPartNumber	Product Part Number	String

Table 56. Response Message Description: AssetManagementComplexQueryPage

Node	Description	Type
ProductType	Product Number	String
PriceType	Price Type	String
SerialNumber	Service Number	String
ServiceAccount	Service Account	String
ServiceAccountId	Service Account ID	String
Status	Status	String
Id	ID	String
AdjustedListPrice	Asjusted List Price	String
AssetCurrencyCode	Asset Currency Code	String
Comments	Comments	String
Name	Asset Name	String
ParentAssetId	Parent Asset ID	String
Quantity2	Quantity	String
RootAssetId	Root Asset ID	String
UnitofMeasure	Unit of Measure	String
DataType	Asset Data Type	String
Description	Asset Description	String
DisplayName	Asset Display Name	String
Value	Asset Value	String

AssetManagementComplex Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 57](#).

Table 57. AssetManagementComplex Service Object

Name	Boundary Object Type	Class
Asset Management - Complex	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 58](#).

Table 58. AssetManagementComplex Data Objects

Siebel Repository Name	External Name
SiebelMessage	SiebelMessage
SiebelMessageIn	SiebelMessage
SiebelMessageOut	SiebelMessageOut

Example Package for AssetManagementComplex

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \AssetManagementComplex\AssetManagementComplex_request.xml
```

Response

See the following file to view the sample code:

```
... \AssetManagementComplex\AssetManagementComplex_response.xml
```

Interface Description (WSDL) for AssetManagementComplex

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \AssetManagementComplex\AssetManagementComplex.wsdl
```

CalculateShippingChargeSalesOrderSiebelReqABCImpl

Use this Web service to get information about the shipping costs of a sales order.

CalculateShippingChargeSalesOrderSiebelReqABCImpl Operations

For a list of operations associated with this Web service, see [Table 59](#).

Table 59. CalculateShippingChargeSalesOrderSiebelReqABCImpl Operations

Name	Description
CalculateShippingCharge	Retrieves shipping charge information for sales orders.

Request Message Description: CalculateShippingCharge

For a description of this request message, see [Table 60](#).

Table 60. Request Message Description: CalculateShippingCharge

Node	Description	Type
CalculateShippingChargeSalesOrderReqMsg:ListOfSWIOrderIOReq	Optional	Hierarchy
CustomerHeaderContext	Optional	Hierarchy

Response Message Description: CalculateShippingCharge

For a description of this response message, see [Table 61](#).

Table 61. Response Message Description: CalculateShippingCharge

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
CalculateShippingChargeSalesOrderRespMsg:ListOfSWIOrderIOResp	Optional	Hierarchy
XMLHierarchyOutput	Optional	Hierarchy
faultactor	Optional	String
faultcode	Optional	String
faultstring	Optional	String
SiebelFaultMsg:Fault	Optional	Integration Object

CalculateShippingChargeSalesOrderSiebelReqABCImpl Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 62](#).

Table 62. CalculateShippingChargeSalesOrderSiebelReqABCImpl Service Object

Siebel Repository Name	Boundary Object Type	Class
SWISendCalculateShippingCharge	Workflow	Not applicable

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 63](#).

Table 63. CalculateShippingChargeSalesOrderSiebelReqABCImpl Data Object

Siebel Repository Name	External Name
SWIOrderIO	SWIOrderIO
Fault	Fault

Methods

For a description of the methods for this Web service, see [Table 64](#).

Table 64. CalculateShippingChargeSalesOrderSiebelReqABCImpl Methods

Operation	Method
CalculateShippingCharge	CalculateShippingCharge

Interface Description (WSDL) for CalculateShippingChargeSalesOrderSiebelReqABCImpl

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \CalculateShippingChargeSalesOrderSiebelReqABCImpl\CalculateShippingChargeSalesOrderSiebelReqABCImpl.wsdl

CatalogWebService

NOTE: This version of CatalogWebService is available only for implementations of Siebel CRM from version 8.1 and later. To use CatalogWebService with Siebel CRM version 8.0, see version 8.0 of *Siebel CRM Web Services Reference*.

Use this Web service to make available promotional offerings related to products, as well as related products and categories.

CatalogWebService Operations

For a list of operations associated with this Web service, see [Table 65](#).

Table 65. CatalogWebService operations

Name	Description
GetRelatedPromotions	Retrieves a list of related promotions.
GetRelatedProducts	Retrieves a list of related products.
GetCategory	Retrieves a flat, non-hierarchical list of categories.
UDSPublishCatalog	Publish a category and product catalog with support of pagination and visibility.

Request Message Description: GetRelatedPromotions

For a description of this request message, see [Table 66](#).

Table 66. Request Message: GetRelatedPromotions

Name	Description	Type
PDS Related Promotions Interface	An instance of the integration object PDS Related Promotions Interface.	Integration Object
PricingMode	Y or N (calculates price or not). Optional. The default value is Y.	String
EligibilityMode	0, 1, 2 (eligibility display mode: 0 do not run; 1 run; 2 run but only return eligible products). Optional. The default value is 1.	String
ContextMode	SiebelContext or ExternalContext. Optional. However, you must provide ContextMode to run pricing and eligibility.	String
Context	An instance of the integration object PDS Catalog Context. It either contains SiebelContext or ExternalContext. Optional only if ContextMode is not provided. If ContextMode is provided, then it is required.	Integration Object

Response Message Description: GetRelatedPromotions

For a description of this response message, see [Table 67](#).

Table 67. Response Message: GetRelatedPromotions

Name	Description	Type
PDS Related Promotions Interface	PDS Related Promotions Interface. After running Eligibility and Pricing, the List Price, Net Price, Eligibility status and Eligibility Reason fields will be updated.	Integration Object

Request Message Description: GetRelatedProducts

For a description of this request message, see [Table 68](#).

Table 68. Request Message: GetRelatedProducts

Name	Description	Type
PDS Related Products Interface	An instance of the integration object PDS Related Products Interface.	Integration Object
PricingMode	Y or N (calculates price or not). Optional. The default value is Y.	String
EligibilityMode	0, 1, 2 (eligibility display mode: 0 do not run; 1 run; 2 run but only return eligible products). Optional. The default value is 1.	String
ContextMode	SiebelContext or ExternalContext. Optional. However, provide ContextMode to run pricing and eligibility.	String
Context	An instance of the integration object PDS Catalog Context. The instance either contains SiebelContext or ExternalContext. Optional only if ContextMode is not provided. If ContextMode is provided, then it is required.	Integration Object

Response Message Description: GetRelatedProducts

For a description of this response message, see [Table 69](#).

Table 69. Response Message: GetRelatedProducts

Name	Description	Type
PDS Related Products Interface	An instance of the integration object PDS Related Products Interface. After running Eligibility and Pricing, the List Price, Net Price, Eligibility status and Eligibility Reason fields will be updated.	Integration Object

Request Message Description: GetCategory

For a description of this request message, see [Table 70](#).

Table 70. Request Message: GetCategory

Name	Description	Type
PDS Category Interface Integration Object	An instance of the integration object PDS Category Interface.	Integration Object

Response Message Description: GetCategory

For a description of this response message, see [Table 71](#).

Table 71. Response Message: GetCategory

Name	Description	Type
PDS Category Interface Integration Object	An instance of the integration object PDS Category Interface.	Integration Object

Request Message Description: UDSPublishCatalog

For a description of this request message, see [Table 72](#).

Table 72. Request Message: UDSPublishCatalog

Name	Description	Type
SiebelMessageIn	An instance of the integration object PDS UDS Publish Catalog Interface. This is a required input.	Integration Object
PricingMode	Y or N (calculates price or not). Optional. The default value is Y.	String
EligibilityMode	0, 1, 2 (eligibility display mode: 0 do not run; 1 run; 2 run but only return eligible products). Optional. The default value is 1.	String
ContextMode	SiebelContext or ExternalContext. Optional. However, provide ContextMode to run pricing and eligibility.	String
Context	An instance of the integration object PDS Catalog Context. It either contains SiebelContext or ExternalContext. Optional only if ContextMode is not provided. If ContextMode is provided, then it is required.	Integration Object
LOVLanguageMode	LIC, or LDC.	String
ViewMode	Visibility algorithm used in addition to a search specification to determine which records will be retrieved. Catalog or Organization.	String
NamedSearchSpec	Name of a predefined query.	String

Response Message Description: UDSPublishCatalog

For a description of this response message, see [Table 73](#).

Table 73. Response Message: UDSPublishCatalog

Name	Description	Type
SiebelMessageOut	An instance of the integration object PDS UDS Publish Catalog Interface.	Integration Object

CatalogWebService Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 74](#).

Table 74. CatalogWebService Application Interface

Name	Boundary Object Type	Class
PDS Product Data Service	BusService	CSSProdDataSvc

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 75](#).

Table 75. CatalogWebService Data Objects

Siebel Repository Name	External Name
PDS Related Promotions Interface	PDS Related Promotions Interface
PDS Related Products Interface	PDS Related Products Interface
PDS Category Interface	PDS Category Interface
PDS UDS Publish Catalog Interface	PDS UDS Publish Catalog Interface

Interface Description (WSDL) for Siebel CatalogWebService

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \CatalogWebService\CatalogWebService.wsdl

CheckATPSalesOrderSiebelReqABCS Impl

Use this Web service to check the availability and location of a requested product.

CheckATPSalesOrderSiebelReqABCSImpl Operations

For a list of operations associated with this Web service, see [Table 76](#).

Table 76. CheckATPSalesOrderSiebelReqABCSImpl Operations

Name	Description
CheckATP	Synchronizes the account.

Request Message Description: CheckATP

For a description of this request message, see [Table 77](#).

Table 77. Request Message Description: CheckATP

Node	Description	Type
CheckATPSalesOrderReqMsg:ATPCheckInterfaceRequestOrders	Optional	Hierarchy
CustomHeaderContext	Optional	Hierarchy

Response Message Description: CheckATP

For a description of this response message, see [Table 78](#).

Table 78. Response Message Description: CheckATP

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
CheckATPSalesOrderRespMsg:ATPCheckInterfaceResponseOrders	Optional	Hierarchy
XMLHierarchyOutput	Optional	Hierarchy
faultactor	Optional	String
faultcode	Optional	String
faultstring	Optional	String
SiebelFaultMsg:Fault	Optional	Integration Object

CheckATPSalesOrderSiebelReqABCSImpl Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 79](#).

Table 79. CheckATPSalesOrderSiebelReqABCSImpl Service Object

Siebel Repository Name	Boundary Object Type	Class
SWISendATPCheck	Workflow	Not applicable
SWISendATPCheckLine	Workflow	Not applicable

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 80](#).

Table 80. CheckATPSalesOrderSiebelReqABCSImpl Data Object

Siebel Repository Name	External Name
SWIOrderIO	SWIOrderIO
Fault	Fault

Methods

For a description of the methods for this Web service, see [Table 81](#).

Table 81. CheckATPSalesOrderSiebelReqABCSImpl Methods

Operation	Method
CheckATP	CheckATP

Example Package for CheckATPSalesOrderSiebelReqABCSImpl

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Interface Description (WSDL) for CheckATPSalesOrderSiebelReqABCSImpl

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \CheckATPSalesOrderSiebelReqABCSImpl \CheckATPSalesOrderSiebelReqABCSImpl.wsdl

ClinicalSubject

Use this Web service to perform the following:

- Create a subject record in the Siebel database from details provided by an external application. The Screen and Enrollment template is applied to each new record with a default informed consent date, if a date is not provided by the external application. If a valid informed consent date is provided by the external application, then the Web service updates the default value with the valid informed consent date.
- Create additional Siebel Life Science statuses for a subject apart from the statuses Screened and Enrolled.
- Mark a subject visit as missed.
- Override the subject visit completion or missed value.
- Create subject statuses using Visit Type.
- Delete the subject status.
- Designate the latest subject status as Primary.
- Designate any record at Primary.
- Mark Visits/Activities as completed with the Completed Date details, and other information provided by the external application.
- Generate an error when the IntegrationId is not sent in the Web service for Visit Completion.
- Use new custom tags: ActCustom1 through ActCustom25 in the Action (No Owner Lock) and SubCustom1 through SubCustom25 on the Clinical Subject integration component.
- Use special status values: Randomized Date, Early Terminated Date, Screen Failure Date and Screen Failure Reason.
- Mark Visits/Activities as completed with the Completed Date details, and other information provided by the external application.

NOTE: This Web service assumes that the Visits/Activities Clinical Item is unique for the given Subject Visit Template.

This Web service returns the Integration ID when a subject creation is successful. The Integration ID is used for identifying the subject for any future operations. An error message is presented in the event of an error.

ClinicalSubject Operations

For a list of operations associated with this Web service, see [Table 82](#).

Table 82. ClinicalSubject Operations

Name	Description
Upsert	Creates a Subject record in the Siebel database with the minimum required details, along with performing relevant updates.

Request Message Description: Upsert

For a description of this request message, see [Table 83](#).

Table 83. Request Message Description: Upsert

Node	Description	Type
ClinicalSubject.Comments	Optional	Character data
ClinicalSubject.DateOfBirth	Required	Date
ClinicalSubject.EarlyTerminatedDate	Optional	Date
ClinicalSubject.EarlyTerminatedReason	Optional	Character data
ClinicalSubject.Comments	Optional	Character data
ClinicalSubject.EligibleFlag	Optional	Boolean flag
ClinicalSubject.EmailAddress	Optional	Character data
ClinicalSubject.EnrollmentDate	Optional	Date
ClinicalSubject.EnrollmentId	Optional	Character data
ClinicalSubject.FaxNumber	Optional	Character data
ClinicalSubject.IntegrationId	Optional	Character data
ClinicalSubject.PhoneNumber	Optional	Character data
ClinicalSubject.ProtocolDeviation	Optional	Character data
ClinicalSubject.ProtocolNumber	Optional	Character data
ClinicalSubject.ProtocolSiteId	Optional	Character data
ClinicalSubject.ProtocolViolation	Optional	Character data
ClinicalSubject.RandomizationId	Optional	Character data
ClinicalSubject.RandomizedDate	Optional	Date
ClinicalSubject.ReasonExcluded	Optional	Character data
ClinicalSubject.SDVRequired	Optional	Character data
ClinicalSubject.ScreenDate	Optional	Date
ClinicalSubject.ScreenFailureDate	Optional	Date
ClinicalSubject.SubCustom1 through SubCustom 25	Optional. New custom fields.	Character data
ClinicalSubject.SubjectInitials	Required	Character data
ClinicalSubject.WithdrawnDate	Optional	Boolean
ClinicalSubject.WithdrawnReason	Optional	Character data
ClinicalSubject_InformedConsent.InformedConsentSignedDate	Optional	Date
VisitPlan.OverrideStatus	Optional	Character data

Table 83. Request Message Description: Upsert

Node	Description	Type
VisitPlan.VisitMissed	Optional	Boolean
ClinicalSubjectStatus.Comments2	Optional	Character data
ClinicalSubjectStatus.DeleteFlag	Optional	Boolean
ClinicalSubjectStatus.Status	Optional	Character data
ClinicalSubjectStatus.StatusDate	Optional	Date
ClinicalSubjectStatus.VisitType	Optional	Character data
ActionNoOwnerLock.ActCustom1 through ActCustom25	Optional. New custom fields.	Character data
ActionNoOwnerLock.Done	Optional	Date
ActionNoOwnerLock.VisitClinicalItem	Optional	Character data
ActionNoOwnerLock.ActivityClinicalItem	Optional	Character data

Response Message Description: Upsert

For a description of this response message, see [Table 84](#).

Table 84. Response Message Description: Upsert

Node	Description	Type
ClinicalSubject.IntegrationId	Required. Returns the process instance ID if the subject creation is successful.	Character data

ClinicalSubject Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 85](#).

Table 85. ClinicalSubject Service Object

Siebel Repository Name	Boundary Object Type	Class
SWI LS Clinical Subject Inbound-Subject	Workflow	Not applicable

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 86](#).

Table 86. ClinicalSubject Data Object

Siebel Repository Name	External Name
Clinical Subject External	Clinical Subject

Example Package for ClinicalSubject

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
...\ClinicalSubject\ClinicalSubject_request.xml
```

Interface Description (WSDL) for ClinicalSubject

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
...\ClinicalSubject\ClinicalSubject_as1_ClinicalSubject.wsdl
```

CMU Account Query

Use this Web service to find an account detail in the Siebel CRM application. A business service is made available in the Siebel CRM application so that the middle layer can query for the account detail in the Siebel CRM application and synchronize this detail with the billing application.

The account detail that this Web service finds includes details about the contacts, addresses, and billing profiles that are associated with the account. This detail includes only those fields that the billing application needs to synchronize data.

The response message returns only an acknowledgement message and not data.

CMU Account Query Operations

For a list of operations associated with this Web service, see [Table 87](#).

Table 87. CMU Account Query Operations

Name	Description
CMU Account Query Page	Finds the account detail based on the account ID and the billing profile ID.

Request Message Description: CMU Account Query Page

For a description of this request message, see [Table 88](#).

Table 88. Request Message Description: CMU Account Query Page

Node	Description
AccountId	The ID of the account for the billing profile.
BillingProfileId	The ID of the billing profile for the account.

CMU Account Query Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 89](#).

Table 89. CMU Account Query Service Object

Name	Boundary Object Type	Class (If Business Service)
CMU Account Query Service	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 90](#).

Table 90. CMU Account Query Data Object

Siebel Repository Name	External Name
CMU Query Account Io	CMU - Account

Methods

For a description of methods for this Web service, see [Table 91](#).

Table 91. CMU Account Query Methods

Operation	Method
CMU Account QueryPage	[BS: CMU Account Query Service].QueryPage

Example Package for CMU Account Query

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \CMUAccountQuery\CMUAccountQuery.xml
```

Response

See the following file to view the sample code:

```
... \CMUAccountQuery\CMUAccountQuery.xml
```

Interface Description (WSDL) for CMU Account Query

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \CMUAccountQuery\CMUAccountQuery.wsdl
```

CMU Account Update

Use this Web service to update the status of an account in the Siebel CRM application when the status of the account changes in the external billing application. The external billing application makes this inbound Web service call to the Siebel CRM application to update the status of the account. A business service is made available in the Siebel CRM application to update the status field.

The response message returns only an acknowledgement message and not data.

CMU Account Update Operations

For a list of operations associated with this Web service, see [Table 92](#).

Table 92. CMU Account Update Operations

Name	Description
CMU Account Update	Updates the status of an account in the Siebel CRM application when the status of the account changes in the billing application.

Request Message Description: CMU Account Update

For a description of this request message, see [Table 93](#).

Table 93. Request Message Description: CMU Account Update

Node	Description
AccountId	The ID of the account for the billing profile.
AccountStatus	The status of the account that was updated in the billing application.

CMU Account Update Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 94](#).

Table 94. CMU Account Update Service Object

Name	Boundary Object Type	Class (If Business Service)
CMU Account Update	Business Service	CSSEAIDataSyncService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 95](#).

Table 95. CMU Account Update Data Object

Siebel Repository Name	External Name
CMU Update Account Io	Account

Methods

For a description of methods for this Web service, see [Table 96](#).

Table 96. CMU Account Update Methods

Operation	Method
CMU Account Update	[BS: CMU Account Update].Update

Example Package for CMU Account Update

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \CMUAccountUpdate\CMUAccountUpdate.xml
```

Response

See the following file to view the sample code:

```
... \CMUAccountUpdate\CMUAccountUpdate.xml
```

Interface Description (WSDL) for Account Update

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \CMUAccountUpdate\CMUAccountUpdate.wsdl

ConfiguratorUserLangSiebelAdapter

This is an Oracle Application Integration Architecture Web service, which is made available by Oracle Application Integration Architecture. This Web service is called from Siebel CRM to get language and other details. Use this outbound Web service to launch Siebel Configurator.

ConfiguratorUserLangSiebelAdapter Operations

For a list of operations associated with this Web service, see [Table 97](#).

Table 97. ConfiguratorUserLangSiebelAdapter Operations

Name	Description
process	Returns the User, Responsibility ID, and Language values from Oracle E-Business Suite. These values are needed to launch Siebel Configurator and customize a product.

Request Message Description: process

For a description of this request message, see [Table 98](#).

Table 98. Request Message Description: process

Node	Description	Type
ConfiguratorUserLangSiebelAdapter RequestMessage:payload	Optional	Hierarchy
CustomHeaderContext	Optional	Hierarchy

Response Message Description: process

For a description of this response message, see [Table 99](#).

Table 99. Response Message Description: process

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
MConfiguratorUserLangSiebelAdapt erResponseMessage:payload	Optional	Hierarchy
XMLHierarchyOutput	Optional	Hierarchy

Table 99. Response Message Description: process

Node	Description	Type
faultactor	Optional	String
faultcode	Optional	String
faultstring	Optional	String
MatchContactFaultMsg:payload	Optional	Integration Object

ConfiguratorUserLangSiebelAdapter Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 100](#).

Table 100. ConfiguratorUserLangSiebelAdapter Service Object

Siebel Repository Name	Boundary Object Type	Class
Oracle Configurator Load	Workflow	Not applicable

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 101](#).

Table 101. ConfiguratorUserLangSiebelAdapter Data Object

Siebel Repository Name	External Name
ConfiguratorUserLangSiebelAdapterProcessRequest	ConfiguratorUserLangSiebelAdapterProcessRequest
ConfiguratorUserLangSiebelAdapterProcessResponse	ConfiguratorUserLangSiebelAdapterProcessResponse

Methods

For a description of the methods for this Web service, see [Table 102](#).

Table 102. ConfiguratorUserLangSiebelAdapter Methods

Operation	Method
process	process

Contact

Use this Web service for the basic operations of Siebel Marketing such as to create and update contacts.

Contact Operations

For a list of operations associated with this Web service, see [Table 103](#).

Table 103. Contact Operations

Name	Description
ContactCreateContact	Creates a contact.
ContactUpdateContact	Updates an existing contact.

Request Message Description: ContactCreateContact

For a description of this request message, see [Table 104](#).

Table 104. Request Message Description: ContactCreateContact

Node	Description	Type
Contact IO	Required. An instance of the integration object Contact IO. <i>Contact</i> is the Parent header and <i>Contact_BusinessAddress</i> is the child.	Integration Object

Response Message Description: ContactCreateContact

For a description of this response message, see [Table 105](#).

Table 105. Response Message Description: ContactCreateContact

Node	Description	Type
Contact Id	The new Contact ID generated as a result of the new contact creation.	String
Error Message	Error Message if any.	String
Success Flag	Flag to indicate success or failure of the operation.	String

Request Message Description: ContactUpdateContact

For a description of this request message, see [Table 106](#).

Table 106. Request Message Description: ContactUpdateContact

Node	Description	Type
Contact IO	Required. An instance of the integration object Contact IO. <i>Contact</i> is the Parent header and <i>Contact_BusinessAddress</i> is the child.	Integration Object

Response Message Description: ContactUpdateContact

For a description of this response message, see [Table 107](#).

Table 107. Response Message Description: ContactUpdateContact

Node	Description	Type
Error Message	Error message if any.	String
Success Flag	Flag to indicate success or failure of the operation.	String

Contact Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 108](#).

Table 108. Contact Data Object

Siebel Repository Name	External Name
Contact IO	Contact IO

Example Package for Contact

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request (ContactCreate)

See the following file to view the sample code:

... \Contact\ContactCreate_request.xml

Response (ContactCreate)

See the following file to view the sample code:

... \Contact\ContactCreate_response.xml

Request (ContactUpdate)

See the following file to view the sample code:

... \Contact\ContactUpdate_request.xml

Response (ContactUpdate)

See the following file to view the sample code:

... \Contact\ContactUpdate_response.xml

Interface Description (WSDL) for Contact

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \Contact\Contact.wsdl

CreateLeads Web Service

Use this Web service to create leads in the Siebel database. If the Web service returns a given contact’s details, and if those details match an existing contact in the Siebel database, then the Web service creates a lead based on the existing contact’s information. If the contact does not exist in the Siebel database, then the Web service creates a new contact record, and creates a new lead from the new contact.

The new lead can be associated with any existing campaign using the Source Code parameter. The Source Code parameter must be retrieved from the ID or Source ID field of the GetCampaigns Web service response. For more information, see “[GetCampaigns Web Service](#)” on page 100.

CreateLeads Web Service Operations

For a list of operations associated with this Web service, see [Table 109](#).

Table 109. CreateLeads Web Service operations

Name	Description
CreateLeads	Creates a lead with provided details. It performs a deduplication operation on lead details, and if the lead does not match an existing lead, creates a new lead.

Request Message Description: CreateLeads

For a description of this request message, see [Table 110](#).

Table 110. Request Message Description: CreateLeads

Node	Description	Type
Lead IO	Used to describe leads. Performs a deduplication operation based on information returned from the node. If required a new contact is created.	Integration Object
Mktg Social Data IO	Used to capture social posts data related to a lead. You can associate multiple social posts to the same lead..	Integration Object
Mktg SM Personal Address IO	Extracts a new lead address from social posts.	Integration Object

Response Message Description: CreateLeads

Supplies the success status for Lead creation. It issues an error message (if any) or a lead ID if the lead creation was successful. For a description of this response message, see [Table 111](#).

Table 111. Response Message Description: CreateLeads

Node	Description	Type
Success Flag	Indicates the status of the CreateLead operation. Status is: Yes if lead is created properly, then No if not.	String
Error Message	A descriptive error message of the particular issue that occurred during lead creation. The Duplicate Lead message indicates the operation is attempting to create a leads that is already in the database.	String
Lead ID	The unique ID of the new lead.	String

CreateLeads Web Service Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 112](#).

Table 112. CreateLeads Service Object

Name	Boundary Object Type	Class (If Business Service)
SocialMediaService	Business Service	CSSSocialService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 113](#).

Table 113. CreateLeads Web Service Data Object

Siebel Repository Name	External Name
LeadIO	ListofLeadIO
MktgSocialDataIO	ListOfMktgSocialDataIO
MktgSMPersonalAddressIO	ListOfMktgSMPersonalAddressIo

Methods

For a description of the methods for this Web service, see [Table 114](#).

Table 114. CreateLeads Web Service Methods

Operation	Method
CreateLeads	CreateLeads

Example Package for CreateLeads Web Service

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \CreateLeadsWebService\CreateLeads_req.xml
```

Response

See the following file to view the sample code:

```
... \CreateLeadsWebService\CreateLeads_resp.xml
```

Interface Description (WSDL) for CreateLeads Web Service

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \CreateLeadsWebService\CreateLeads.wsdl

CreditCheckSalesOrderSiebelReqABCImpl

Use this Web service to verify that the method of payment used in a purchase order is a valid payment type.

CreditCheckSalesOrderSiebelReqABCImpl Operations

For a list of operations associated with this Web service, see [Table 115](#).

Table 115. CreditCheckSalesOrderSiebelReqABCImpl Operations

Name	Description
CreditCheck	Checks for the method of payment.

Request Message Description: CreditCheck

For a description of this request message, see [Table 116](#).

Table 116. Request Message Description: CreditCheck

Node	Description	Type
CreditCheckSalesOrderReqMsg:ListOfSWIOrderIOReq	Optional	Hierarchy
CustomHeaderContext	Optional	Hierarchy

Response Message Description: CreditCheck

For a description of this response message, see [Table 117](#).

Table 117. Response Message Description: CreditCheck

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
CreditCheckSalesOrderRespMsg:ListOfSWIOrderIOResp	Optional	Hierarchy
XMLHierarchyOutput	Optional	Hierarchy
faultactor	Optional	String
faultcode	Optional	String

Table 117. Response Message Description: CreditCheck

Node	Description	Type
faultstring	Optional	String
SiebelFaultMsg:Fault	Optional	Integration Object

CreditCheckSalesOrderSiebelReqABCImpl Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 118](#).

Table 118. CreditCheckSalesOrderSiebelReqABCImpl Service Object

Siebel Repository Name	Boundary Object Type	Class
SWISendCreditCheck	Workflow	Not applicable

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 119](#).

Table 119. CreditCheckSalesOrderSiebelReqABCImpl Data Object

Siebel Repository Name	External Name
SWIOrderIO	SWIOrderIO
Fault	Fault

Methods

For a description of the methods for this Web service, see [Table 120](#).

Table 120. CreditCheckSalesOrderSiebelReqABCImpl Methods

Operation	Method
CreditCheck	CreditCheck

Example Package for CreditCheckSalesOrderSiebelReqABCImpl

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Interface Description (WSDL) for CreditCheckSalesOrderSiebelReqABCImpl

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \CreditCheckSalesOrderSiebelReqABCImpl\CreditCheckSalesOrderSiebelReqABCImpl.wsd1

FetchAccountSiebelReqABCImpl

Use this outbound Web service to synchronize account details with the participating application by fetching the account details from the Siebel database. This Web service is called when the fetch process is triggered in the Siebel application from the Account list, or form applets, and also from the Match Account pop-up applet.

FetchAccountSiebelReqABCImpl Operations

The following operations are used for the FetchAccountSiebelReqABCImpl Web service.

For a list of operations associated with this Web service, see [Table 121](#).

Table 121. FetchAccountSiebelReqABCImpl Operations

Name	Description
FetchAccount	This operation is used to import a new account from the participating application to Siebel database tables. It is called from the Match Account pop-up applet by clicking the Fetch button to fetch the queried account details from the participating application.
CustomerPartyIOFetchAccount	Synchronizes a preexisting account from the participating application and imports the record to the Siebel database. The operation is called from the Account list or form applet by clicking the Fetch menu item.
AsyncFetchCustomerPartyResponse	Not in use.

Request Message Description: FetchAccount

For a description of this request message, see [Table 122](#).

Table 122. Request Message Description: FetchAccount

Node	Description	Type
FetchAccountReqMsg:ListofSwimatchaccountvbcio	Optional	Hierarchy
CustomHeaderContext	Optional	Hierarchy

Response Message Description: FetchAccount

For a description of this response message, see [Table 123](#).

Table 123. Response Message Description: FetchAccount

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
FetchAccountRespMsg:ListofSwimatchaccountvbcio	Optional	Hierarchy
XMLHierarchyOutput	Optional	Hierarchy
faultactor	Optional	String
faultcode	Optional	String
faultstring	Optional	String
FetchAccountFaultMsg:Fault	Optional	Integration Object

Request Message Description: CustomerPartyIOFetchAccount

For a description of this request message, see [Table 124](#).

Table 124. Request Message Description: CustomerPartyIOFetchAccount

Node	Description	Type
FetchAccountReqMsg:ListofSwimatchaccountvbcio	Optional	Hierarchy
CustomHeaderContext	Optional	Hierarchy

Response Message Description: CustomerPartyIOFetchAccount

For a description of this response message, see [Table 125](#).

Table 125. Response Message Description: CustomerPartyIOFetchAccount

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
CustomerPartyIOFetchAccountRespMsg:ListofSwicustomerpartyio	Optional	Hierarchy
XMLHierarchyOutput	Optional	Hierarchy
faultactor	Optional	String
faultcode	Optional	String
faultstring	Optional	String
FetchAccountFaultMsg:Fault	Optional	Integration Object

FetchAccountSiebelReqABCServiceImpl Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 126](#).

Table 126. FetchAccountSiebelReqABCServiceImpl Service Object

Siebel Repository Name	Boundary Object Type	Class
SWI External Account Request Sync Process	Workflow	Not applicable

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 127](#).

Table 127. FetchAccountSiebelReqABCServiceImpl Data Object

Siebel Repository Name	External Name
SWIMatchAccountVBCIO	Account
SWICustomerPartyIO	Account
Fault	Fault

Methods

For a description of the methods for this Web service, see [Table 128](#).

Table 128. FetchAccountSiebelReqABCServiceImpl Methods

Operation	Method
FetchAccount	FetchAccount
CustomerPartyIOFetchAccount	CustomerPartyIOFetchAccount
AsyncFetchCustomerPartyResponse	AsyncFetchCustomerPartyResponse

Example Package for FetchAccountSiebelReqABCServiceImpl

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Interface Description (WSDL) for FetchAccountSiebelReqABCImpl

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

WSDL

...WSDL\FetchAccountSiebelReqABCImpl.wsdl

FetchContactSiebelReqABCImpl

Use this outbound Web service to synchronize contact details with the participating application and the Siebel database. This Web service is called from the Siebel application when the fetch process is called from Contact list or form applets, and also from the Match Contact pop-up applet.

FetchContactSiebelReqABCImpl Operations

For a list of operations associated with this Web service, see [Table 129](#).

Table 129. FetchContactSiebelReqABCImpl Operations

Name	Description
FetchContact	Imports a new contact from the participating application to the Siebel database. This operation is called from the Match Contact pop-up applet when a user clicks the Fetch button to fetch the queried contact details from the participating application.
ContactIOFetchContact	Synchronizes a contact from the participating application and imports the record to the Siebel database. This operation is called from the Contact list or form applet by clicking on Fetch menu item to fetch contact details from the participating application.
AsyncFetchCustomerPartyResponse	Not in use.

Request Message Description: FetchContact

Sends queried contact details from the participating application through the Match Contact process to import and synchronize the contact record with Siebel data tables.

For a description of this request message, see [Table 130](#).

Table 130. Request Message Description: FetchContact

Node	Description	Type
BirthDate	Contact's birth date.	String
CellularPhone	Contact's mobile phone number.	String

Table 130. Request Message Description: FetchContact

Node	Description	Type
ContactId	Row ID of the contact record in Siebel data tables.	String
EmailAddress	Contact's email address.	String
ExternalContactId	Oracle Application Integration Architecture (AIA) Cross Reference ID for the contact.	String
FirstName	Contact's first name.	String
HomePhone	Contact's home phone number.	String
LastName	Contact's last name.	String
MatchScore	Match score.	String
MiddleName	Contact's middle name.	String
PrimaryAccountName	Contact's primary address.	String
PrimaryCity	Contact's primary city.	String
PrimaryCountry	Contact's primary country.	String
PrimaryPostalCode	Contact's primary postal code.	String
PrimaryState	Contact's primary state.	String
PrimaryStreetAddress	Contact's primary street address.	String
SocialSecurityNumber	Contact's social security number.	String
WorkPhone	Contact's work phone number.	String

Response Message Description: FetchContact

Contains the Siebel ID value of the contact record that is imported into the Siebel data tables. This record is used to refresh and display the imported contact details in the Siebel application.

For a description of this response message, see [Table 131](#).

Table 131. Response Message Description: FetchContact

Node	Description	Type
ContactId	Siebel Row ID of the contact record.	String

Request Message Description: ContactIOFetchContact

Sends contact details to the participating application to synchronize the contact with the Siebel database.

For a description of this request message, see [Table 132](#).

Table 132. Request Message Description: ContactIOFetchContact

Node	Description	Type
Id	Contact ID.	String
RowId	Siebel Row ID of the contact record.	String

Response Message Description: ContactIOFetchContact

Contains the Siebel ID value of the contact record that is synchronized with the Siebel database. This record is used to refresh contact details in the Siebel application after synchronizing the contact with the participating application.

For a description of this response message, see [Table 133](#).

Table 133. Response Message Description: ContactIOFetchContact

Node	Description	Type
Id	Contact ID.	String
RowId	Siebel Row ID of the contact record.	String

FetchContactSiebelReqABCServiceImpl Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 134](#).

Table 134. FetchContactSiebelReqABCServiceImpl Service Object

Siebel Repository Name	Boundary Object Type	Class
FetchContactSiebelReqABCServiceImplService	Business Service	CSSWSOutboundDispatcher

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 135](#).

Table 135. FetchContactSiebelReqABCServiceImpl Data Object

Siebel Repository Name	External Name
SWIMatchContactVBCIO	Contact
SWICustomerPartyIO	SWI Contact
Fault	Fault

Interface Description (WSDL) for FetchContactSiebelReqABCImpl

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

WSDL

...WSDL\FetchContactSiebelReqABCImpl.wsdl

FS Asset Warranty Service

Use this Web service to create asset warranties and to retrieve asset warranty information.

FS Asset Warranty Service Operations

For a list of operations associated with this Web service, see [Table 136](#).

Table 136. FS Asset Warranty Service Operations

Name	Description
CreateAssetWarranty	Adds the input warranty to the source asset.
GetAssetWarranty	Used to retrieve all the warranties for a specified asset's product and then add them to the asset if not already done so.

Request Message Description: CreateAssetWarranty

Adds a specific warranty to an asset. If that warranty has already been added to the asset record, then the service will update the service date. For a description of this request message, see [Table 137](#).

Table 137. Request Message Description: CreateAssetWarranty

Node	Description	Type
Asset Id	Row ID of asset.	String
Warranty Id	Row ID of the warranty.	String
Serviced Date	Date from which warranty will start displayed in the following format: (mm/dd/yyyy).	Date

Response Message Description: CreateAssetWarranty

For a description of this response message, see [Table 138](#).

Table 138. Response Message Description: CreateAssetWarranty

Node	Description	Type
StatusMsg	(Optional). Will give error message in the case of incompatibility of inputs. If there is no incompatibility, then there will be no message.	String

Request Message Description: GetAssetWarranty

This operation will add all the warranty information associated with an asset. The date depends on the start data type of each warranty. If some of the warranties are already attached to the asset, then the operation adds the other potential warranties, but leaves the existing warranties untouched.

CAUTION: This operation does not return an error message if the user provides the wrong value for Asset ID.

For a description of this request message, see [Table 139](#).

Table 139. Request Message Description: GetAssetWarranty

Node	Description	Type
Asset Id	Row ID of asset.	String

Response Message Description: GetAssetWarranty

This Web service has no response message.

FS Asset Warranty Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 140](#).

Table 140. FS Asset Warranty Service Object

Name	Boundary Object Type	Class
BS: FS Asset Warranty Service	Business Service	CSSFSAsetWrntyService
Operation: CreateAssetWarranty		
BS: FS Asset Warranty Service	Business Service	CSSFSAsetWrntyService
Operation: GetAssetWarranties		

Example Package for FS Asset Warranty Service

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request, Response (CreateAssetWarranty)

See the following file to view the sample code:

... \FSAssetWarranty\CreateAssetWarranty_Sample_IO.doc

Request, Response (GetAssetWarranties)

See the following file to view the sample code:

... \FSAssetWarranty\GetAssetWarranty_Sample_IO.doc

Interface Description (WSDL) for FS Asset Warranty Service

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \FSAssetWarranty\FSAssetWarranty.wsdl

GetCampaigns Web Service

Use this Web service to retrieve campaigns and associated details from Siebel CRM with input parameters. Campaigns are sorted by the following criteria: Type, Subtype, and the Last Name field.

The Source ID parameter in the response message for this Web service is used in conjunction with the Create Leads Web service to associate a newly created lead with an existing campaign. For more information, see "[CreateLeads Web Service](#)" on page 87.

GetCampaigns Web Service Operations

For a list of operations associated with this Web service, see [Table 141](#).

Table 141. GetCampaigns Web Service Operations

Name	Description
GetCampaigns	Returns a list of campaigns based on provide input parameters.

Request Message Description: GetCampaigns

For a description of this request message, see [Table 142](#).

Table 142. Request Message Description: GetCampaigns

Node	Description	Type
Campaign Name	Optional. The campaign name. Restricts results by campaign name. For example, passing a value of 2002 will return all campaigns that have 2002 in the name.	String
Start Date	Optional. Returns a list of campaigns having a start date greater or equal to a given value.	String
End Date	Optional. Returns a list of campaigns having a start date less than or equal to a given value.	String
Page Number	Required. Determines the number of records retrieved by a response. It must be a value greater than zero.	String
Row Number	Optional. Retrieves the Page Number value of campaigns. It must be a value greater than zero.	String
Source Code	The row ID of the campaign you want to retrieve.	String

Response Message Description: GetCampaigns

For a description of this response message, see [Table 143](#).

Table 143. Response Message Description: GetCampaigns

Node	Description	Type
MKTG campaign IO	Determines what fields of campaign records are retrieved and added to a response.	Integration Object

GetCampaigns Web Service Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 144](#).

Table 144. GetCampaigns Service Object

Name	Boundary Object Type	Class (If Business Service)
SocialMedia Service	Business Service	CSSSocialService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 145](#).

Table 145. GetCampaigns Web Service Data Object

Siebel Repository Name	External Name
MKTG Campaign IO	LeadofLeadIO

Methods

For a description of the methods for this Web service, see [Table 146](#).

Table 146. Get Campaigns List Web Service Methods

Operation	Method
GetCampaigns	GetCampaigns

Example Package for GetCampaigns Web Service

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \GetCampaigns\GetCampaigns_req.xml
```

Response

See the following file to view the sample code:

```
... \GetCampaigns\GetCampaigns_resp.xml
```

Interface Description (WSDL) for GetCampaigns Web Service

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \GetCampaigns\GetCampaigns.wsdl
```

GetMktgWebSurvey

Use this Web service to get Siebel Marketing Web surveys.

GetMktgWebSurvey Operations

For a list of operations associated with this Web service, see [Table 147](#).

Table 147. GetMktgWebSurvey Operations

Name	Description
GetMktgWebSurveyQueryPage	This operation is used to query up a Survey Page.

Request Message Description: GetMktgWebSurveyQueryPage

For a description of this request message, see [Table 148](#).

Table 148. Request Message Description: GetMktgWebSurveyQueryPage

Node	Description	Type
ExecutionMode	The mode in which the query is to be performed.	String
LOVLanguageMode	The language mode from the seeded list.	String
NamedSearchSpec	Search specification of the query.	String
PickListName	Name of the picklist (if any).	String
SiebelMessageIn	An instance of the GetMktgWebSurvey Integration Object.	Integration Object
ViewMode	The View Mode set for the Object (Admin, Preserve, and so on).	String

Response Message Description: GetMktgWebSurveyQueryPage

For a description of this response message, see [Table 149](#).

Table 149. Response Message Description: GetMktgWebSurveyQueryPage

Node	Description	Type
SiebelMessageOut	An instance of the GetMktgWebSurvey Integration Object.	Integration Object

GetMktgWebSurvey Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 150](#).

Table 150. GetMktgWebSurvey Data Object

Siebel Repository Name	External Name
Import Job Integration Object	Import Job Integration Object.

Example Package for GetMktgWebSurvey

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Interface Description (WSDL) for GetMktgWebSurvey

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \GetMktgwebSurvey\GetMktgwebSurvey.wsdl

InvoiceSiebelCommsReqABCS

Use this Web service to retrieve bill, usage, event, and resource balance information for bills in a billing profile. This Web service retrieves the information from the billing application.

InvoiceSiebelCommsReqABCS Operations

For a list of operations associated with this Web service, see [Table 151](#).

Table 151. InvoiceSiebelCommsReqABCS Operations

Name	Description
QueryInvoiceList	Queries the invoice list for the billing profile in the Billing view.
QueryInvoice	Queries the invoice details for the billing profile in the Billing view.
QueryResourceBalance	Queries the resource balance details for the billing profile in the Billing view.
SearchEventDetails	Searches the event details for the billing profile view in the Billing view.
QueryEventDetails	Queries the event details for the billing profile view in the Billing view.

Request Message Description: QueryInvoiceList

For a description of this request message, see [Table 152](#).

Table 152. Request Message Description: QueryInvoiceList

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
QueryInvoiceReqMsg:ListOfCmuRequestBilledUsageIo	Optional	Integration Object

Response Message Description: QueryInvoiceList

For a description of this response message, see [Table 153](#).

Table 153. Response Message Description: QueryInvoiceList

Node	Description	Type
QueryInvoiceRespMsg:ListOfCmuResponseBilledUsageDetailsIo	Optional	Integration Object
FaultMsg:Fault	Optional	Integration Object

Request Message Description: QueryInvoice

For a description of this request message, see [Table 154](#).

Table 154. Request Message Description: QueryInvoice

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
QueryInvoiceReqMsg:ListOfCmuRequestBilledUsageIo	Optional	Integration Object

Response Message Description: QueryInvoice

For a description of this response message, see [Table 155](#).

Table 155. Response Message Description: QueryInvoice

Node	Description	Type
QueryInvoiceRespMsg:ListOfCmuResponseBilledUsageDetailsIo	Optional	Integration Object
FaultMsg:Fault	Optional	Integration Object

Request Message Description: QueryResourceBalance

For a description of this request message, see [Table 156](#).

Table 156. Request Message Description: QueryResourceBalance

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
QueryResourceBalanceReqMsg:ListOfCmuRequestCdrBalanceDetailsIo	Optional	Integration Object

Response Message Description: QueryResourceBalance

For a description of this response message, see [Table 157](#).

Table 157. Response Message Description: QueryResourceBalance

Node	Description	Type
QueryResourceBalanceRespMsg:ListOfCmuResponseCdrBalanceDetailsIo	Optional	Integration Object
FaultMsg:Fault	Optional	Integration Object

Request Message Description: SearchEventDetails

For a description of this request message, see [Table 158](#).

Table 158. Request Message Description: SearchEventDetails

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
SearchEventDetailsReqMsg:ListOfCmuRequestCdrDetailsSearchIo	Optional	Integration Object

Response Message Description: SearchEventDetails

For a description of this response message, see [Table 159](#).

Table 159. Response Message Description: SearchEventDetails

Node	Description	Type
SearchEventDetailsRespMsg:ListOfCmuResponseCdrDetailsIo	Optional	Integration Object
FaultMsg:Fault	Optional	Integration Object

Request Message Description: QueryEventDetails

For a description of this request message, see [Table 160](#).

Table 160. Request Message Description: QueryEventDetails

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
QueryEventDetailsReqMsg:ListOfCmuRequestCdrDetailsIo	Optional	Integration Object

Response Message Description: QueryEventDetails

For a description of this response message, see [Table 161](#).

Table 161. Response Message Description: QueryEventDetails

Node	Description	Type
QueryEventDetailsRespMsg:ListOfCmuResponseCdrDetailsIo	Optional	Integration Object
FaultMsg:Fault	Optional	Integration Object

InvoiceSiebelCommsReqABCS Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 162](#).

Table 162. InvoiceSiebelCommsReqABCS Service Object

Name	Boundary Object Type	Class (If Business Service)
InvoiceSiebelCommsReqABCS	Business Service	CSSWSOutboundDispatcher

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 163](#).

Table 163. InvoiceSiebelCommsReqABCS Data Object

Siebel Repository Name	External Name
CMU Response CDR Details IO	Account
CMU Request CDR Details IO	Account
CMU Request Billed Usage IO	Account

Table 163. InvoiceSiebelCommsReqABCS Data Object

Siebel Repository Name	External Name
CMU Response Billed Usage Details IO	Account
CMU Request Billing Profile IO	Account
CMU Response Billing Invoice IO	Account
CMU Response CDR Balance Details IO	Account
CMU Request CDR Balance Details IO	Account
CMU Request CDR Details Search IO	Account
Fault	Fault

Methods

For a description of the methods for this Web service, see [Table 164](#).

Table 164. InvoiceSiebelCommsReqABCS Methods

Operation	Method
QueryInvoiceList	QueryInvoiceList
QueryInvoice	QueryInvoice
QueryResourceBalance	QueryResouceBalance
SearchEventDetails	SearchEventDetails
QueryEventDetails	QueryEventDetails

Example Package for InvoiceSiebelCommsReqABCS

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

... \InvoiceSiebelCommsReqABCS \QueryInvoice_request.xml

Response

See the following file to view the sample code:

... \InvoiceSiebelCommsReqABCS \QueryInvoice_response.xml

Interface Description (WSDL) for InvoiceSiebelCommsReqABCS

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

...\InvoiceSiebelCommsReqABCS\InvoiceSiebelReqABCSService.wsdl

ISS Price List Item WS

Use this Web service to add, update, and delete items in a price list in the Siebel application. The response message returns only an acknowledgement message and not data.

ISS Price List Item WS Operations

For a list of operations associated with this Web service, see [Table 165](#).

Table 165. ISS Price List Item WS Operations

Name	Description
Price List Item InsertOrUpdate	Adds an item to a price list that does not already contain that item, and updates an item in a price list that already contains that item.
Price List Item Insert	Adds an item to a price list.
Price List Item Update	Updates an item in a price list.
Price List Item Delete	Deletes an item from a price list.

Request Message Description: Price List Item InsertOrUpdate

For a description of this request message, see [Table 166](#).

Table 166. Request Message Description: Price List Item InsertOrUpdate

Node	Description
Price List Id	The ID of the price list. This node is used only to insert.
Product Id	The ID of the product to add to the price list. This node is used only to insert.
Price List Item Id	The ID of the price list item to update to the price list. This node is used only to update.

Request Message Description: Price List Item Insert

For a description of this request message, see [Table 167](#).

Table 167. Request Message Description: Price List Item Insert

Node	Description
Price List Id	The ID of the price list.
Product Id	The ID of the product to add to the price list.

Request Message Description: Price List Item Update

For a description of this request message, see [Table 168](#).

Table 168. Request Message Description: Price List Item Update

Node	Description
Price List Item Id	The ID of the price list item to update in the price list.

Request Message Description: Price List Item Delete

For a description of this request message, see [Table 169](#).

Table 169. Request Message Description: Price List Item Delete

Node	Description
Price List Item Id	The ID of the price list item to delete from the price list.

ISS Price List Item WS Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 170](#).

Table 170. ISS Price List Item WS Service Object

Name	Boundary Object Type	Class (If Business Service)
ISS Price List Item WS	Business Service	CSSEAIDataSyncService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 171](#).

Table 171. ISS Price List Item WS Data Object

Siebel Repository Name	External Name
ISS Price List Item Integration Object	Admin Price List

Methods

For a description of methods for this Web service, see [Table 172](#).

Table 172. ISS Price List Item WS Methods

Operation	Method
Price List Item InsertOrUpdate	[BS: ISS Price List Item WS].InsertOrUpdate
Price List Item Insert	[BS: ISS Price List Item WS].Insert
Price List Item Update	[BS: ISS Price List Item WS].Update
Price List Item Delete	[BS: ISS Price List Item WS].Delete

Example Package for ISS Price List Item WS

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
...\ISSPriceListItem\ISS Price List Item WS.xml
```

Response

See the following file to view the sample code:

```
...\ISSPriceListItemWS\ISS Price List Item WS.xml
```

Interface Description (WSDL) for ISS Price List Item WS

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
...\ISSPriceListItem\ISS Price List Item WS.wsdl
```

ISS Web Commerce Export Attributes

Use this Inbound Web service to query for attribute definitions and values that were created in Siebel Customer Order Management.

ISS Web Commerce Export Attributes Operations

For a list of operations associated with this Web service, see [Table 173](#).

Table 173. ISS Web Commerce Export Attributes Operations

Name	Description
ISSWebCommerceAttributeQueryPage	Queries for an attribute definition.

Request Message Description: ISSWebCommerceAttributeQueryPage

For a description of this request message, see [Table 174](#).

Table 174. Request Message Description: ISSWebCommerceAttributeQueryPage

Node	Description	Type
LOVLanguageMode	Required. Indicates whether the value chosen from the list of values must be translated before being sent to the object manager. Valid values are LIC or LDC.	String
NamedSearchSpec	The name of a predefined query. The predefined query is performed on the business object instance.	String
NewQuery	The default value is False. This Boolean option indicates whether a new query is executed. If set to True, then a new query is executed clearing the cache of the integration object.	String
SiebelMessageIn	An instance of the integration object for attribute definitions and values.	Integration Object
ViewMode	Used to set the View Mode property for all business components corresponding to the integration object. Valid values are Manager, Sales Rep, Personal, Organization, Sub-Organization, Group, Catalog, and All.	String

Response Message Description: ISSWebCommerceAttributeQueryPage

For a description of this response message, see [Table 175](#).

Table 175. Response Message Description: ISSWebCommerceAttributeQueryPage

Node	Description	Type
SiebelMessageOut	An instance of the integration object ISS Web Commerce Export Attribute used for attribute definitions and values.	Integration Object

ISS Web Commerce Export Attributes Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 176](#).

Table 176. ISS Web Commerce Export Attributes Service Object

Name	Boundary Object Type	Class
ISS Web Commerce Export Attributes	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 177](#).

Table 177. ISS Web Commerce Export Attribute Data Object

Siebel Repository Name	External Name
ISS Web Commerce Export Attribute Integration Object	ISS Web Commerce Export Attribute Integration Object

Methods

For a description of the methods for this Web service, see [Table 178](#).

Table 178. ISS Web Commerce Export Attribute Methods

Operation	Method
ISSWebCommerceAttributeQueryPage	QueryPage

Example Package for ISS Web Commerce Export Attributes

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
...\ISSWebCommerceExportAttributes\AttributeQueryRequest.xml
```

Response

See the following file to view the sample code:

```
...\ISSWebCommerceExportAttributes\AttributeQueryResponse.xml
```

Interface Description (WSDL) for ISS Web Commerce Export Attributes

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

```
...\ISSWebCommerceExportAttributes\ISS_web_Commerce_Export_Attributes.WSDL
```

ISS Web Commerce Export Class

Use this Inbound Web service to query for class definitions that were created in Siebel Customer Order Management.

ISS Web Commerce Export Class Operations

For a list of operations associated with this Web service, see [Table 179](#).

Table 179. ISS Web Commerce Export Class Operations

Name	Description
ISSWebCommerceClassQueryPage	Queries for a class.

Request Message Description: ISSWebCommerceClassQueryPage

For a description of this request message, see [Table 180](#).

Table 180. Request Message Description: ISSWebCommerceClassQueryPage

Node	Description	Type
LOVLanguageMode	Required. Indicates whether the value chosen from the list of values must be translated before being sent to the object manager. Valid values are LIC or LDC.	String
NamedSearchSpec	The name of a predefined query. The predefined query is performed on the business object instance.	String
NewQuery	The default value is False. This Boolean option indicates whether a new query needs to be executed. If set to True, then a new query is executed clearing the cache of that particular integration object.	String
SiebelMessageIn	An instance of the integration object for class definitions.	Integration Object
ViewMode	Used to set the View Mode property for all business components corresponding to the integration object. Valid values are Manager, Sales Rep, Personal, Organization, Sub-Organization, Group, Catalog, and All.	String

Response Message Description: ISSWebCommerceClassQueryPage

For a description of this response message, see [Table 181](#).

Table 181. Response Message Description: ISSWebCommerceClassQueryPage

Node	Description	Type
SiebelMessageOut	An instance of the integration object for class definitions and values.	Integration Object

ISS Web Commerce Export Class Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 182](#).

Table 182. ISS Web Commerce Export Class Service Object

Name	Boundary Object Type	Class
ISS Web Commerce Export Class	Business service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 183](#)

Table 183. ISS Web Commerce Export Class Data Object

Siebel Repository Name	External Name
ISS Web Commerce Export Class Integration Object	ISS Web Commerce Export Class Integration Object

Methods

For a description of the methods for this Web service, see [Table 184](#)

Table 184. ISS Web Commerce Export Class Methods

Operation	Method
ISSWebCommerceClassQueryPage	QueryPage

Example Package for ISS Web Commerce Export Class

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

... \ISSwebCommerceExportClass\ClassQueryRequest.xml

Response

See the following file to view the sample code:

... \ISSwebCommerceExportClass\ClassQueryResponse.xml

Interface Description (WSDL) for ISS Web Commerce Export Class

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

...\ISSWebCommerceExportClass\ISS_web_Commerce_Export_Class.WSDL

ISS Web Commerce Export Content

Use this Inbound Web service to query or update export content job header or line items that were created within Siebel Customer Order Management.

ISS Web Commerce Export Contents Operations

For a list of operations associated with this Web service, see [Table 185](#).

Table 185. ISS Web Commerce Export Contents Operations

Name	Description
ISSWebCommerceContentQueryPage	Queries for a content header or line item.
ISSWebCommerceContentUpdate	Updates a content header or line item.

Request Message Description: ISSWebCommerceContentQueryPage

For a description of this request message, see [Table 186](#).

Table 186. Request Message Description: ISSWebCommerceContentQueryPage

Node	Description	Type
LOVLanguageMode	Required. Indicates whether the value chosen from the list of values must be translated before being sent to the object manager. Valid values are LIC or LDC.	String
NamedSearchSpec	The name of a predefined query. The predefined query is performed on the business object instance.	String
NewQuery	Default is False. This Boolean option indicates whether a new query needs to be executed. If set to True, then a new query is executed flushing the cache for that particular integration object.	String

Table 186. Request Message Description: ISSWebCommerceContentQueryPage

Node	Description	Type
SiebelMessageIn	An instance of the integration object for Content Header and Line Items.	Integration Object
ViewMode	The ViewMode method argument is used to set the View Mode property for all business components corresponding to the integration object. Valid values are Manager, Sales Rep, Personal, Organization, Sub-Organization, Group, Catalog, and All.	String

Response Message Description: ISSWebCommerceContentQueryPage

For a description of this response message, see [Table 187](#).

Table 187. Response Message Description: ISSWebCommerceContentQueryPage

Node	Description	Type
SiebelMessageOut	An instance of the integration object for content header and line items.	Integration Object

Request Message Description: ISSWebCommerceContentUpdate

For a description of this request message, see [Table 188](#).

Table 188. Request Message Description: ISSWebCommerceContentUpdate

Node	Description	Type
SiebelMessageIn	An instance of the integration object for content header and line items.	Integration Object

Response Message Description: ISSWebCommerceContentUpdate

For a description of this response message, see [Table 189](#).

Table 189. Response Message Description: ISSWebCommerceContentUpdate

Node	Description	Type
SiebelMessageOut	An instance of the integration object for content header and line items.	Integration Object

ISS Web Commerce Export Contents Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 190](#).

Table 190. ISS Web Commerce Export Contents Service Object

Name	Boundary Object Type	Class
ISS Web Commerce Export Contents	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 191](#).

Table 191. ISS Web Commerce Export Contents Data Object

Siebel Repository Name	External Name
ISS Web Commerce Export Contents Integration Object	ISS Web Commerce Export Contents Integration Object

Methods

For a description of the methods for this Web service, see [Table 192](#).

Table 192. ISS Web Commerce Export Contents Methods

Operation	Method
ISSWebCommerceContentQueryPage	QueryPage
ISSWebCommerceContentUpdate	Update

Example Package for ISS Web Commerce Export Contents

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```

... \ISSwebCommerceExportContents\ContentQueryRequest.xml
... \ISSwebCommerceExportContents\ContentUpdateRequest.xml
    
```

Response

See the following file to view the sample code:

```
... \ISSWebCommerceExportContents\ContentQueryResponse.xml
... \ISSWebCommerceExportContents\ContentUpdateResponse.xml
```

Interface Description (WSDL) for ISS Web Commerce Export Contents

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

```
... \ISSWebCommerceExportContents\ISS_Web_Commerce_Export_Contents.WSDL
```

ISS Web Commerce Export Error

Use this Inbound Web service to query, update, or insert export content error messages for export job header or line items that were created within Siebel Customer Order Management.

ISS Web Commerce Export Error Operations

For a list of operations associated with this Web service, see [Table 193](#).

Table 193. ISS Web Commerce Export Error Operations

Name	Description
ISSWebCommerceErrorQueryPage	Queries for an export content error message.
ISSWebCommerceErrorUpdate	Updates an export content error message.
ISSWebCommerceErrorInsert	Inserts an export content error message.

Request Message Description: ISSWebCommerceErrorQueryPage

For a description of this request message, see [Table 194](#).

Table 194. Request Message Description: ISSWebCommerceErrorQueryPage

Node	Description	Type
LOVLanguageMode	Required. Indicates whether the value chosen from the list of values must be translated before being sent to the object manager. Valid values are LIC or LDC.	String
NamedSearchSpec	The name of a predefined query. The predefined query is performed on the business object instance.	String

Table 194. Request Message Description: ISSWebCommerceErrorQueryPage

Node	Description	Type
NewQuery	Default is False. Boolean indicating whether a new query needs to be executed. If set to True, then a new query is executed flushing the cache for that particular integration object.	String
SiebelMessageIn	An instance of the integration object for content error messages.	Integration Object
ViewMode	The ViewMode method argument is used to set the View Mode property for all business components corresponding to the integration object. Valid values are Manager, Sales Rep, Personal, Organization, Sub-Organization, Group, Catalog, and All.	String

Response Message Description: ISSWebCommerceErrorQueryPage

For a description of this response message, see [Table 195](#).

Table 195. Response Message Description: ISSWebCommerceErrorQueryPage

Node	Description	Type
SiebelMessageOut	An instance of the integration object for content error messages.	Integration Object

Request Message Description: ISSWebCommerceErrorUpdate

For a description of this request message, see [Table 196](#).

Table 196. Request Message Description: ISSWebCommerceErrorUpdate

Node	Description	Type
SiebelMessageIn	An instance of the integration object for content error messages.	Integration Object

Response Message Description: ISSWebCommerceErrorUpdate

For a description of this response message, see [Table 197](#).

Table 197. Response Message Description: ISSWebCommerceErrorUpdate

Node	Description	Type
SiebelMessageOut	An instance of the integration object for content error messages.	Integration Object

Request Message Description: ISSWebCommerceErrorInsert

For a description of this request message, see [Table 198](#).

Table 198. Request Message Description: ISSWebCommerceErrorInsert

Node	Description	Type
SiebelMessageIn	An instance of the integration object for content error messages.	Integration Object

Response Message Description: ISSWebCommerceErrorInsert

For a description of this response message, see [Table 199](#).

Table 199. Response Message Description: ISSWebCommerceErrorInsert

Node	Description	Type
SiebelMessageOut	An instance of the integration object for content error messages.	Integration Object

ISS Web Commerce Export Error Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 200](#).

Table 200. ISS Web Commerce Export Error Service Object

Name	Boundary Object Type	Class
ISS Web Commerce Export Error Messages	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 201](#).

Table 201. ISS Web Commerce Export Error Data Object

Siebel Repository Name	External Name
ISS Web Commerce Export Error Message Integration Object	ISS Web Commerce Export Error Message Integration Object

Methods

For a description of the methods for this Web service, see [Table 202](#).

Table 202. ISS Web Commerce Export Error Methods

Operation	Method
ISSWebCommerceErrorQueryPage	QueryPage
ISSWebCommerceErrorUpdate	Update
ISSWebCommerceErrorInsert	Insert

Example Package for ISS Web Commerce Export Error

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

- ... \ISSWebCommerceExportError\ErrorInsertRequest.xml
- ... \ISSWebCommerceExportError\ErrorQueryRequest.xml
- ... \ISSWebCommerceExportError\ErrorUpdateRequest.xml

Response

See the following file to view the sample code:

- ... \ISSWebCommerceExportError\ErrorInsertResponse.xml
- ... \ISSWebCommerceExportError\ErrorQueryResponse.xml
- ... \ISSWebCommerceExportError\ErrorUpdateResponse.xml

Interface Description (WSDL) for ISS Web Commerce Export Error

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \ISSWebCommerceExportError\ISS_web_Commerce_Export_Errors.WSDL

ISS Web Commerce Export Price Lists

Use this Inbound Web service to query for price lists that were created within Siebel Customer Order Management.

ISS Web Commerce Export Price Lists Operations

For a list of operations associated with this Web service, see [Table 203](#).

Table 203. ISS Web Commerce Export Price Lists Operations

Name	Description
ISSWebCommercePriceListQueryPage	Queries for a price list and price list item.

Request Message Description: ISSWebCommercePriceListQueryPage

For a description of this request message, see [Table 204](#).

Table 204. Request Message Description: ISSWebCommercePriceListQueryPage

Node	Description	Type
LOVLanguageMode	Required. Indicates whether the value chosen from the list of values must be translated before being sent to the object manager. Valid values are LIC or LDC.	String
NamedSearchSpec	The name of a predefined query. The predefined query is performed on the business object instance.	String
NewQuery	Default is False. Boolean indicating whether a new query needs to be executed. If set to True, then a new query is executed flushing the cache for that particular integration object.	String

Table 204. Request Message Description: ISSWebCommercePriceListQueryPage

Node	Description	Type
SiebelMessageIn	An instance of the integration object for Price List and Price List Items.	Integration Object
ViewMode	The ViewMode method argument is used to set the View Mode property for all business components corresponding to the integration object. Valid values are Manager, Sales Rep, Personal, Organization, Sub-Organization, Group, Catalog, and All.	String

Response Message Description: ISSWebCommercePriceListQueryPage

For a description of this response message, see [Table 205](#).

Table 205. Response Message Description: ISSWebCommercePriceListQueryPage

Node	Description	Type
SiebelMessageOut	An instance of the integration object for price list and price list items.	Integration Object

ISS Web Commerce Export Price Lists Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 206](#).

Table 206. ISS Web Commerce Export Price Lists Service Object

Name	Boundary Object Type	Class
ISS Web Commerce Export Price Lists	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 207](#).

Table 207. ISS Web Commerce Export Price Lists Data Object

Siebel Repository Name	External Name
ISS Web Commerce Export Price List Integration Object	ISS Web Commerce Export Price List Integration Object

Methods

For a description of the methods for this Web service, see [Table 208](#).

Table 208. ISS Web Commerce Export Price Lists Methods

Operation	Method
ISSWebCommercePriceListQueryPage	QueryPage

Example Package for ISS Web Commerce Export Price Lists

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

... \ISSwebCommerceExportPriceLists\PriceListQueryRequest.xml

Response

See the following file to view the sample code:

... \ISSwebCommerceExportPriceLists\PriceListQueryResponse.xml

Interface Description (WSDL) for ISS Web Commerce Export Price Lists

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \ISSwebCommerceExportPriceLists\ISS_Web_Commerce_Export_Price_Lists.WSDL

ISS Web Commerce Export Recommended Products

Use this Inbound Web service to query for recommended products that were created in Siebel Customer Order Management.

ISS Web Commerce Export Recommended Products Operations

For a list of operations associated with this Web service, see [Table 209](#).

Table 209. ISS Web Commerce Export Recommended Products Operations

Name	Description
ISSWebCommerceRecommendedProductQueryPage	Queries for a recommended product.

Request Message Description: ISSWebCommerceRecommendedProductQueryPage

For a description of this request message, see [Table 210](#).

Table 210. Request Message Description: ISSWebCommerceRecommendedProductQueryPage

Node	Description	Type
LOVLanguageMode	Required. Indicates whether the value chosen from the list of values must be translated before being sent to the object manager. Valid values are LIC or LDC.	String
NamedSearchSpec	The name of a predefined query. The predefined query is performed on the business object instance.	String
NewQuery	Default is False. Boolean indicating whether a new query needs to be executed. If set to True, then a new query is executed flushing the cache for that particular integration object.	String

Table 210. Request Message Description: ISSWebCommerceRecommendedProductQueryPage

Node	Description	Type
SiebelMessageIn	An instance of the integration object for Price List and Price List Items.	Integration Object
ViewMode	The ViewMode method argument is used to set the View Mode property for all business components corresponding to the integration object. Valid values are Manager, Sales Rep, Personal, Organization, Sub-Organization, Group, Catalog, and All.	String

Response Message Description: ISSWebCommerceRecommendedProductQueryPage

For a description of this response message, see [Table 211](#).

Table 211. Response Message Description: ISSWebCommerceRecommendedProductQueryPage

Node	Description	Type
SiebelMessageOut	An instance of the integration object for Recommended Product.	Integration Object

ISS Web Commerce Export Recommended Products Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 212](#).

Table 212. ISS Web Commerce Export Recommended Products Service Object

Name	Boundary Object Type	Class
ISS Web Commerce Export Recommended Products	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 213](#).

Table 213. ISS Web Commerce Export Recommended Products Data Object

Siebel Repository Name	External Name
ISS Web Commerce Export Recommended Product Integration Object	ISS Web Commerce Export Recommended Product Integration Object

Methods

For a description of the methods for this Web service, see [Table 214](#).

Table 214. ISS Web Commerce Export Recommended Products Methods

Operation	Method
ISSWebCommerceRecommendedProductQueryPage	QueryPage

Example Package for ISS Web Commerce Export Recommended Products

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \ISSWebCommerceExportRecommendedProducts\RecommendedProductsQueryRequest.xml
```

Response

See the following file to view the sample code:

```
... \ISSWebCommerceExportRecommendedProducts\RecommendedProductsQueryResponse.xml
```

Interface Description (WSDL) for ISS Web Commerce Export Recommended Products

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

```
... \ISSWebCommerceExportRecommendedProducts\ISS_Web_Commerce_Export_Recommended_Products.WSDL
```

ISS Web Commerce Export Volume Discounts

Use this Inbound Web service to query for volume discounts and volume discount items that were created within Siebel Customer Order Management.

ISS Web Commerce Export Volume Discounts Operations

For a list of operations associated with this Web service, see [Table 215](#).

Table 215. ISS Web Commerce Export Volume Discounts Operations

Name	Description
ISSWebCommerceVolumeDiscountQueryPage	Query for a volume discount or volume discount item

Request Message Description: ISSWebCommerceVolumeDiscountQueryPage

For a description of this request message, see [Table 216](#).

Table 216. Request Message Description: ISSWebCommerceVolumeDiscountQueryPage

Node	Description	Type
LOVLanguageMode	Required. Indicates whether the value chosen from the list of values must be translated before being sent to the object manager. Valid values are LIC or LDC.	String
NamedSearchSpec	The name of a predefined query. The predefined query is performed on the business object instance.	String
NewQuery	Default is False. Boolean indicating whether a new query needs to be executed. If set to True, then a new query is executed flushing the cache for that particular integration object.	String

Table 216. Request Message Description: ISSWebCommerceVolumeDiscountQueryPage

Node	Description	Type
SiebelMessageIn	An instance of the integration object for Price List and Price List Items.	Integration Object
ViewMode	The ViewMode method argument is used to set the View Mode property for all business components corresponding to the integration object. Valid values are Manager, Sales Rep, Personal, Organization, Sub-Organization, Group, Catalog, and All.	String

Response Message Description: ISSWebCommerceVolumeDiscountQueryPage

For a description of this response message, see [Table 217](#).

Table 217. Response Message Description: ISSWebCommerceVolumeDiscountQueryPage

Node	Description	Type
SiebelMessageOut	An instance of the integration object for Volume Discount and Volume Discount Item.	Integration Object

ISS Web Commerce Export Volume Discounts Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 218](#).

Table 218. ISS Web Commerce Export Volume Discounts Service Object

Name	Boundary Object Type	Class
ISS Web Commerce Export Volume Discounts	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 219](#).

Table 219. ISS Web Commerce Export Volume Discounts Data Object

Siebel Repository Name	External Name
ISS Web Commerce Export Volume Discount Integration Object	ISS Web Commerce Export Volume Discount Integration Object

Methods

For a description of the methods for this Web service, see [Table 220](#).

Table 220. ISS Web Commerce Export Volume Discounts Methods

Operation	Method
ISSWebCommerceVolumeDiscountQueryPage	QueryPage

Example Package for ISS Web Commerce Export Volume Discounts

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

... \ISSwebCommerceExportVolumeDiscounts\VolumeDiscountQueryRequest.xml

Response

See the following file to view the sample code:

... \ISSwebCommerceExportVolumeDiscounts\VolumeDiscountQueryResponse.xml

Interface Description (WSDL) for ISS Web Commerce Export Volume Discounts

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \ISSwebCommerceExportVolumeDiscounts\ISS_Web_Commerce_Export_Volume_Discounts.WSDL

LeadProcessingService

This service contains the basic operations for processing leads, including assigning, querying, scoring and data cleansing.

Lead Processing Service Operations

For a list of operations associated with this Web service, see [Table 221](#).

Table 221. Lead Processing Service Operations

Name	Description
LeadProcessingServiceAssignLeads	Used to assign leads to sales representatives.
LeadProcessingServiceDataCleansing	Used for data cleansing of marketing data.
LeadProcessingServiceGetLeads	Queries for leads.
LeadProcessingServiceScoreLeads	Scores leads based on defined characteristics.

Request Message Description: LeadProcessingServiceAssignLeads

This method is used to assign leads. It accepts the input parameters in a property set. For a description of this request message, see [Table 222](#).

Table 222. Request Message Description: LeadProcessingServiceAssignLeads

Node	Description	Type
Execution Order	Required. Parameter to be passed to the Business Rules Workflow.	String
Search Specification	Required. The input search criteria to search on the Lead business component.	String

Response Message Description: LeadProcessingServiceAssignLeads

For a description of this response message, see [Table 223](#).

Table 223. Response Message Description: LeadProcessingServiceAssignLeads

Node	Description	Type
Error Message	Error code values are OK or NOTOK.	String
Process Instance Id	This is the Business Rules Workflow process ID.	String
Success Flag	Values are Yes or No based on whether the lead assignment was successfully created.	String

Request Message Description: LeadProcessingServiceDataCleansing

This method calls the Data Cleansing business service to cleanup a property set. For a description of this request message, see [Table 224](#).

Table 224. Request Message Description: LeadProcessingServiceDataCleansing

Node	Description	Type
Business Component	Required. Business component to be passed to data cleansing service.	String
Business Object	Required. Business object from which the business component instance is obtained.	String
Search Specification	Required. Search specification to query the business component and get the values in activated fields.	String

Response Message Description: LeadProcessingServiceDataCleansing

For a description of this request message, see [Table 225](#).

Table 225. Response Message Description: LeadProcessingServiceDataCleansing

Node	Description	Type
Error Message	Error code values are OK or NOTOK.	String
Success Flag	Values are Yes or No based on whether the lead assignment was successfully created.	String

Request Message Description: LeadProcessingServiceGetLeads

This method is used to get leads based on the input criteria. For a description of this request message, see [Table 226](#).

Table 226. Request Message Description: LeadProcessingServiceGetLeads

Node	Description	Type
Search Specification	Required. The input search criteria to search on Lead business component.	String

Response Message Description: LeadProcessingServiceGetLeads

For a description of this response message, see [Table 227](#).

Table 227. Response Message Description: LeadProcessingServiceGetLeads

Node	Description	Type
SiebelMessage	Required. Has Lead ID and description of the leads.	Integration Object

Request Message Description: LeadProcessingServiceScoreLeads

This method is used to score leads. It accepts the input parameters in a property set. For a description of this request message, see [Table 228](#).

Table 228. Request Message Description: LeadProcessingServiceScoreLeads

Node	Description	Type
Execution Order	Required. Parameter to be passed to Business Rules workflow.	String

Response Message Description: LeadProcessingServiceScoreLeads

For a description of this response message, see [Table 229](#).

Table 229. Response Message Description: LeadProcessingServiceScoreLeads

Node	Description	Type
Error Message	Error code values are OK or NOTOK.	String
Process Instance Id	This is the Business Rules workflow process ID.	String
Success Flag	Values are Yes or No based on whether the lead assignment was successfully created.	String

LeadProcessingService Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 230](#).

Table 230. LeadProcessingService Service Object

Name	Boundary Object Type
Business Rules Workflow	WorkFlow
Data Cleansing	Business Service

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 231](#).

Table 231. LeadProcessingService Data Object

Siebel Repository Name	External Name
Lead Integration Object	Lead

Example Package for Lead Processing Service

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request (LeadProcessingServiceAssignLeads)

See the following file to view the sample code:

```
...\LeadProcessingService\LeadProcessingService_AssignLeads_request.xml
```

Response (LeadProcessingServiceAssignLeads)

See the following file to view the sample code:

```
...\LeadProcessingService\LeadProcessingService_AssignLeads_request.xml
```

Request (LeadProcessingServiceDataCleansing)

See the following file to view the sample code:

```
...\LeadProcessingService\LeadProcessingService_ScoreLeads_request.xml
```

Response(LeadProcessingServiceDataCleansing)

See the following file to view the sample code:

```
...\LeadProcessingService\LeadProcessingService_ScoreLeads_request.xml
```

Request (LeadProcessingServiceGetLeads)

See the following file to view the sample code:

```
...\LeadProcessingService\LeadProcessingService_ScoreLeads_request.xml
```

Response (LeadProcessingServiceGetLeads)

See the following file to view the sample code:

```
...\LeadProcessingService\LeadProcessingService_ScoreLeads_request.xml
```

Request (LeadProcessingServiceScoreLeads)

See the following file to view the sample code:

```
...\LeadProcessingService\LeadProcessingService_ScoreLeads_request.xml
```

Response (LeadProcessingServiceScoreLeads)

See the following file to view the sample code:

```
...\LeadProcessingService\LeadProcessingService_ScoreLeads_request.xml
```


Interface Description (WSDL) for Lead Processing Service

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \LeadProcessingService\LeadProcessing.wsdl

LeadService

Use this Web service to perform basic operations on the Lead entity, such create, update, convert, retire and reject leads.

LeadService Operations

For a list of operations associated with this Web service, see [Table 232](#).

Table 232. LeadService Operations

Name	Description
LeadServiceRetireLead	Retires a lead.
LeadServiceCreateLead	Creates a lead.
LeadServiceRejectLead	Rejects a lead.
LeadServiceResponseToLead	Converts response to leads.
LeadServiceConvertLeadToOpty	Converts lead to an opportunity.
LeadServiceUpdateLead	Updates a lead.

Request Message Description: LeadServiceRetireLead

This method is used to assign leads. It accepts the input parameters in a property set. For a description of this request message, see [Table 233](#).

Table 233. Request Message Description: LeadServiceRetireLead

Node	Description	Type
LeadId	Required. The ID of the lead to be retired.	String
ReasonCode	Required The reason code for retiring the lead.	String
Comments	Comments for retiring (if any).	String

Response Message Description: LeadServiceRetireLead

For a description of this response message, see [Table 234](#).

Table 234. Response Message Description: LeadServiceRetireLead

Node	Description	Type
RetVal	Error code values are OK or NOTOK.	String

Request Message Description: LeadServiceCreateLead

For a description of this request message, see [Table 235](#).

Table 235. Request Message Description: LeadServiceCreateLead

Node	Description	Type
Lead IO	Required. An instance of the integration object Lead IO.	Integration Object

Response Message Description: LeadServiceCreateLead

For a description of this response message, see [Table 236](#).

Table 236. Response Message Description: LeadServiceCreateLead

Node	Description	Type
Error Message	Error message (if any).	String
Success Flag	Y or N.	String
Lead Id	ID of the lead generated as a result of the lead creation.	String

Request Message Description: LeadServiceRejectLead

This method is used to reject a lead. The lead ID is retained, along with a reject comments code, a reject reason code. Optionally an owner ID can be passed to whom the lead will be assigned. For a description of this request message, see [Table 237](#).

Table 237. Request Message Description: LeadServiceRejectLead

Node	Description	Type
LeadId	Required. The ID of the lead to be rejected.	String
OwnerId	Optional.	String
ReasonCode	Reason code for rejecting the lead.	String
Comments	Comments (if any).	String

Response Message Description: LeadServiceRejectLead

For a description of this response message, see [Table 238](#).

Table 238. Response Message Description: LeadServiceRejectLead

Node	Description	Type
ReturnVal	Error code values are OK or NOTOK.	String

Request Message Description: LeadServiceResponseToLead

For a description of this request message, see [Table 239](#).

Table 239. Request Message Description: LeadServiceResponseToLead

Node	Description	Type
Response Id	Required. The ID of the response to be converted to lead.	String

Response Message Description: LeadServiceResponseToLead

For a description of this response message, see [Table 240](#).

Table 240. Response Message Description: LeadServiceResponseToLead

Node	Description	Type
Error Message	Error message (if any).	String
Success Flag	Y or N.	String
Lead Id	The ID of the lead created from the response.	String

Request Message Description: LeadServiceConvertLeadToOpty

For a description of this request message, see [Table 241](#).

Table 241. Request Message Description: LeadServiceConvertLeadToOpty

Node	Description	Type
LeadId	Required. The ID of the lead to be converted.	String
Contact Id	The contact ID of the lead.	String
Account Id	The account ID of the lead.	String

Response Message Description: LeadServiceConvertLeadToOpty

For a description of this response message, see [Table 242](#).

Table 242. Response Message Description: LeadServiceConvertLeadToOpty

Node	Description	Type
Error Message	Error message (if any).	String
Success Flag	Y or N.	String
Opty Id	The ID of the opportunity created.	String

Request Message Description: LeadServiceUpdateLead

This method is used to update leads. It accepts input parameters in a property set. For a description of this request message, see [Table 243](#).

Table 243. Request Message Description: LeadServiceUpdateLead

Node	Description	Type
Lead IO	Required. An instance of the integration object Lead IO.	Integration Object

Response Message Description: LeadServiceUpdateLead

For a description of this response message, see [Table 244](#).

Table 244. Response Message Description: LeadServiceUpdateLead

Node	Description	Type
Error Message	Error message (if any).	String
Success Flag	Y or N.	String

LeadService Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 245](#).

Table 245. LeadService Service Object

Name	Boundary Object Type
Response To Lead Conversion	Workflow
Lead To Opty Conversion	Workflow

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 246](#).

Table 246. LeadService Data object

Siebel Repository Name	External Name
Lead IO	Lead

Example Package for LeadService

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request (LeadServiceRetireLead)

See the following file to view the sample code:

```
... \LeadService\LeadService_RetireLead_request.xml
```

Response (LeadServiceRetireLead)

See the following file to view the sample code:

```
... \LeadService\LeadService_RetireLead_response.xml
```

Request (LeadServiceCreateLead)

See the following file to view the sample code:

```
... \LeadService\LeadService_CreateLead_request.xml
```

Response (LeadServiceCreateLead)

See the following file to view the sample code:

```
... \LeadService\LeadService_CreateLead_response.xml
```

Request (LeadServiceRejectLead)

See the following file to view the sample code:

```
... \LeadService\LeadService_RejectLead_request.xml
```

Response(LeadServiceRejectLead)

See the following file to view the sample code:

```
... \LeadService\LeadService_RejectLead_response.xml
```

Request (LeadServiceResponseToLead)

See the following file to view the sample code:

```
...\LeadService\LeadService_ResponseToLead_request.xml
```

Response (LeadServiceResponseToLead)

See the following file to view the sample code:

```
...\LeadService\LeadService_ResponseToLead_response.xml
```

Request (LeadServiceConvertLeadToOpty)

See the following file to view the sample code:

```
...\LeadService\LeadService_ConvertToOpty_request.xml
```

Response (LeadServiceConvertLeadToOpty)

See the following file to view the sample code:

```
...\LeadService\LeadService_ConvertToOpty_response.xml
```

Request (LeadServiceUpdateLead)

See the following file to view the sample code:

```
...\LeadService\LeadService_UpdateLead_request.xml
```

Response (LeadServiceUpdateLead)

See the following file to view the sample code:

```
...\LeadService\LeadService_UpdateLead_response.xml
```

Interface Description (WSDL) for LeadService

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
...\LeadService\Lead.wsdl
```

List

Use this Web service for the basic operations for processing lists.

List Operations

For a list of operations associated with this Web service, see [Table 247](#).

Table 247. List Operations

Name	Description
ListCreateList	Creates a list.
ListExportList	Exports a list.

Request Message Description: ListCreateList

This method is used to create a list. It accepts the input parameters as a property set. For a description of this request message, see [Table 248](#).

Table 248. Request Message Description: ListCreateList

Node	Description	Type
List IO	Required. An instance of the integration object List IO.	Integration Object

Response Message Description: ListCreateList

For a description of this response message, see [Table 249](#).

Table 249. Response Message Description: ListCreateList

Node	Description	Type
List Id	List ID of the list created.	String
Error Message	Error message if any.	String
Success Flag	Y or N.	String

Request Message Description: ListExportList

This method is used to export lists. It accepts the input parameters as a property set. For a description of this request message, see [Table 250](#).

Table 250. Request Message Description: ListExportList

Node	Description	Type
Business Component	The Business component whose records need to be exported.	String
Business Object	The business object containing the business component.	String
Export Format	The format (xml, or CSV) based on which the filename or filenames are to be created.	String
Search Specification	The search specification for the records on the business component (if the records satisfying a condition are only to be picked).	String

List Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 251](#).

Table 251. List Service Object

Name	Boundary Object Type
EAI XML Write to File	Business Service

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 252](#).

Table 252. List Data Object

Siebel Repository Name	External Name
List IO	List IO

Example Package for List

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request (ListCreateList)

See the following file to view the sample code:

```
...\List\ListCreate_request.xml
```

Response (ListCreateList)

See the following file to view the sample code:

```
...\List\ListCreate_response.xml
```

Request (ListExportList)

See the following file to view the sample code:

```
...\List\ListExport_request.xml
```


Interface Description (WSDL) for List

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

...\List\List.wsdl

ListMgmtProspect

Use this Web service for the basic operations in Siebel Marketing such as to create and update prospect.

ListMgmtProspect Operations

For a list of operations associated with this Web service, see [Table 253](#).

Table 253. ListMgmtProspect Operations

Name	Description
ListMgmtProspectCreateProspect	Creates a Prospect.
ListMgmtProspectUpdateProspect	Updates a Prospect.

Request Message Description: ListMgmtProspectCreateProspect

This method takes in an integration object called Prospect IO and returns the Prospect ID and Success Flag. For a description of this request message, see [Table 254](#).

Table 254. Request Message Description: ListMgmtProspectCreateProspect

Node	Description	Type
Prospect IO	Required input parameter.	Integration Object

Response Message Description: ListMgmtProspectCreateProspect

For a description of this response message, see [Table 255](#).

Table 255. Response Message Description: ListMgmtProspectCreateProspect

Node	Description	Type
Prospect Id	Unique ID of the prospect created.	String
Error Message	Error message, if any.	String
Success Flag	Y or N.	String

Request Message Description: ListMgmtProspectUpdateProspect

This method updates a prospect. For a description of this request message, see [Table 256](#).

Table 256. Request Message Description: ListMgmtProspectUpdateProspect

Node	Description	Type
Prospect IO	Required input parameter.	Integration Object

Response Message Description: ListMgmtProspectUpdateProspect

For a description of this response message, see [Table 257](#).

Table 257. Response Message Description: ListMgmtProspectUpdateProspect

Node	Description	Type
Error Message	Error message, if any.	String
Success Flag	Y or N.	String

Example Package for ListMgmtProspect

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request (ListMgmtProspectCreate)

See the following file to view the sample code:

... \ListMgmtProspect \ListMgmtProspectCreate_request.xml

Response (ListMgmtProspectCreate)

See the following file to view the sample code:

... \ListMgmtProspect \ListMgmtProspectCreate_request.xml

Request (ListMgmtProspectUpdate)

See the following file to view the sample code:

... \ListMgmtProspect \ListMgmtProspectUpdate_request.xml

Response (ListMgmtProspectUpdate)

See the following file to view the sample code:

... \ListMgmtProspect \ListMgmtProspectUpdate_request.xml

Interface Description (WSDL) for ListMgmtProspect

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

...\ListMgmtProspect\ListMgmtProspect.wsdl

LoyaltyAccrualService

Use this Web service with Siebel Loyalty to perform operations on orders, including processing, importing from an external file, importing transactions, and exporting promotions.

LoyaltyAccrualService Operations

For a list of operations associated with this Web service, see [Table 258](#).

Table 258. LoyaltyAccrualService Operations

Name	Description
ProcessExternalOrder	Process all the transactions with the given order number.
ImportExternalOrderTxn	Imports the transactions from an external file, assigns the given order number to the files, and processes all the transactions.
ProcessExternalOrderTxn	Imports the transactions from given input, stamps the transaction with an order number, and processes all the transactions. The request mode can be either Process, or Simulate.
ProcessSocialActionTxn	Captures customers' social actions (such as checkins, Tweets, shares and so on) and processes their rewards in Siebel Loyalty. This operation automatically creates a new transaction for a referral reward based on the referee's purchase transaction. Rewards are on a one-time and recurring basis.
ExportPromotions	Exports the promotion of given program.
CancelOrder	Cancels all the transactions in a given order.

Request Message Description: ProcessExternalOrder

For a description of this request message, see [Table 259](#).

Table 259. Request Message Description: ProcessExternalOrder

Node	Description	Type
Order Number – Number	The number of transactions this order number will be processed.	Number

Response Message Description: ProcessExternalOrder

For a description of this response message, see [Table 260](#).

Table 260. Response Message Description: ProcessExternalOrder

Node	Description	Type
Total Points	Total number of points for a given order.	Number

Request Message Description: ImportExternalOrderTxn

For a description of this request message, see [Table 261](#).

Table 261. Request Message Description: ImportExternalOrderTxn

Node	Description	Type
File Name	File name that contains the transactions.	String.

Response Message Description: ImportExternalOrderTxn

For a description of this response message, see [Table 262](#).

Table 262. Response Message Description: ImportExternalOrderTxn

Node	Description	Type
Total Points	Total number of points for a given order.	Number
Siebel Message	Siebel Message of transactions.	Hierarchy

Request Message Description: ProcessExternalOrderTxn

Imports the transactions from an external file, assigns the given order number to the files, and processes all the transactions. The Request Mode can be either Process or Simulate. For a description of this request message, see [Table 263](#).

Table 263. Request Message Description: ProcessExternalOrderTxn

Node	Description	Type
Order Number	Order Number to be stamped to the saved transactions.	Number
Total Lines	Total number of transactions in the Input.	Number
Request Mode	Possible modes are Process or Simulate.	String
LOY EAI Transactions	Transactions in integration object format.	Integration Object

Response Message Description: ProcessExternalOrderTxn

For a description of this response message, see [Table 264](#).

Table 264. Response Message Description: ProcessExternalOrderTxn

Node	Description	Type
Total Points – Number	Total number of points for the given order.	Number
Return Value – String	Possible values are Failure, or Success.	String
Siebel Message – Hierarchy	Siebel message of transactions.	Hierarchy

Request Message Description: ProcessSocialActionTxn

For a description of this request message, see [Table 265](#).

Table 265. Request Message Description: ProcessSocialActionTxn

Node	Description	Type
SiebelMessage	One or more transactions in integration object format.	Integration Object

Response Message Description: ProcessSocialActionTxn

For a description of this response message, see [Table 266](#).

Table 266. Response Message Description: ProcessSocialActionTxn

Node	Description	Type
ErrorArgs	Error message of each transaction.	Hierarchy
Siebel Message – Hierarchy	Processing information of transactions in the LOY EAI Transaction integration object format.	Hierarchy

Request Message Description: ExportPromotions

Exports the promotion of given program. For a description of this request message, see [Table 267](#).

Table 267. Request Message Description: ExportPromotions

Node	Description	Type
Activity Date	Date needs to be between the start and end date of the promotion.	String
Export Flag	Export flag can be Y or N.	String
Program Name	Program name to which the user must export the promotions.	String

Response Message Description: ExportPromotions

For a description of this response message, see [Table 268](#).

Table 268. Response Message Description: ExportPromotions

Node	Description	Type
Siebel Message	All the promotions in LOY EAI Promotion integration object format.	Integration Object.

Request Message Description: CancelOrder

For a description of this request message, see [Table 269](#).

Table 269. Request Message Description: ExportPromotions

Node	Description	Type
LOY Cancel Order Transaction	An instance of the integration object LOY Cancel Order Transaction.	Integration Object
Order Number	The order number of the order to be cancelled.	Number.

Response Message Description: CancelOrder

For a description of this response message, see [Table 270](#).

Table 270. Response Message Description: ExportPromtions

Node	Description	Type
LOY Cancel Order Transaction	An instance of the integration object LOY Cancel Order Transaction.	Integration Object
Order Number	The order number of the order to be cancelled.	Number.

Example of Package for LoyaltyAccrualService

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on the Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Then extract the files in the zip file.

Request

See the following file to view the sample code:

- ... \LoyaltyAccrualService\ProcessExternalOrder_request.xml
- ... \LoyaltyAccrualService\ProcessExternalOrderTxn_request.xml
- ... \LoyaltyAccrualService\RequestMode_Simulate_request.xml
- ... \LoyaltyAccrualService\ProcessExternalOrderTxn_request.xml

... \LoyaltyAccrualService\ExportPromotions_request.xml

Response

See the following file to view the sample code:

... \LoyaltyAccrualService\ProcessExternalOrder_response.xml

... \LoyaltyAccrualService\ProcessExternalOrderTxn_response.xml

... \LoyaltyAccrualService\RequestMode_Simulate_response.xml

... \LoyaltyAccrualService\ProcessExternalOrderTxn_response.xml

... \LoyaltyAccrualService\ExportPromotions_response.xml

Interface Description (WSDL) for LoyaltyAccrualService

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

WSDL (ProcessExternalOrder)

... \LoyaltyAccrualService\ProcessExternalOrder.wsdl

WSDL (ImportExternalOrderTxn)

... \LoyaltyAccrualService\ImportExternalOrderTxn.wsdl

WSDL (ProcessExternalOrderTxn)

... \LoyaltyAccrualService\ProcessExternalOrderTxn.wsdl

WSDL (ExportPromotions)

... \LoyaltyAccrualService\ExportPromotions.wsdl

LoyaltyBatchEnrollment

Use this Web service with the Siebel Loyalty Application to perform the following operations for a member:

- Enrolling a member into the selected Loyalty Program
- Updating member data
- Enrollment Payment processing for the selected member
- Generating specified number of pre-allotted memberships into the selected Loyalty Program.

LoyaltyBatchEnrollment Operations

For a list of operations associated with this Web service, see [Table 271](#).

Table 271. LoyaltyBatchEnrollment Operations

Name	Description
MemberEnrollment	<p>Enrolls a member into the specified loyalty program and returns the generated Member number, along with the Simulated prices for enrollment, if any. In case of any error, it sends the member data along with the error message or messages.</p> <p>If the Enrollment entails a payment, then this Web service method enrolls the member into Payment Pending status. If there is no Payment required, then the member directly goes into the Active status.</p>
MemberUpdate	<p>Used to update member details.</p> <p>If there is payment involved with the membership scheme, and if the membership is designated as Pre-Allotted, then this Web service updates the member details and returns the list of simulated prices along with the list of error messages occurred during the member update.</p>
EnrollmentPaymentProcessing	<p>Used to process the enrollment payment for the selected member, who is in the Payment Pending status.</p> <p>If the payment processing is successful, then the member status becomes Active, otherwise the status will remain in Payment Pending.</p> <p>This Web service returns the list of error messages occurred during the payment processing.</p>
GeneratePreallottedMemberships	<p>Used to generate the specified number of membership numbers for the given Loyalty program. The status of all these memberships.</p>
EnrolContactAsMember	<p>Creates a Loyalty membership from an existing Siebel contact from social networks. You can also view membership details and contact details that were captured from the attributes of the social profile.</p>

Request Message Description: MemberEnrollment

For a description of this request message, see [Table 272](#).

Table 272. Request Message Description: MemberEnrollment

Node	Description	Type
Siebel Message	Hierarchy of the Member details. Uses the integration object LOY Member. Required Input: <ul style="list-style-type: none"> ■ Action Type must be Enrollment. ■ Program Id. ■ Membership Scheme Id. ■ Member Type. ■ Contact Details. ■ Account, Household details based on the member type. 	Hierarchy (Integration Object : LOY Member).

Response Message Description: MemberEnrollment

For a description of this response message, see [Table 273](#).

Table 273. Response Message Description: MemberEnrollment

Node	Description	Type
Siebel Message	Hierarchy of the Member details. If there is any error in the processing of the member details, then the property set returns the entire member details along with the error messages. If the member is created successfully and payment is involved for the membership scheme, then the property set contains the enrolment simulated price lists.	Hierarchy (Integration Object : LOY Member).

Request Message Description: MemberUpdate

For a description of this request message, see [Table 274](#).

Table 274. Request Message Description: MemberUpdate

Node	Description	Type
Siebel Message	<p>Hierarchy of the Member details. Uses the integration object LOY Member.</p> <p>Required Input:</p> <ul style="list-style-type: none"> ■ Action type must be 'Update'. ■ Member Number. 	Hierarchy (Integration Object : LOY Member)

Response Message Description: MemberUpdate

For a description of this response message, see [Table 275](#).

Table 275. Response Message Description: MemberUpdate

Node	Description	Type
Siebel Message	<p>Hierarchy of the Member details. If there is any error in the processing of the member details, then the property set returns the entire member details along with the error messages.</p> <p>If the member has a status of Prealloted and the supplied membership scheme has payment, then the property set contains the enrolment simulated price lists.</p>	Hierarchy

Request Message Description: EnrolmentPaymentProcessing

For a description of this request message, see [Table 276](#).

Table 276. Request Message Description: EnrolmentPaymentProcessing

Node	Description	Type
Member Number	Member number.	String
Credit Card Number	Credit card number.	String
Card Holder Name	Name of the credit card holder.	String
Credit Card Type	Credit Card Type such as Visa, MasterCard, and so on.	String
Expiration Month	Expiration Month of the credit card.	String
Expiration Year	Expiration year of the credit card.	String
CVV Number	CVV number of the credit card.	String
Billing Address	Primary billing address of the member.	String
Billing Address2	Secondary billing address of the member.	String

Table 276. Request Message Description: EnrolmentPaymentProcessing

Node	Description	Type
Billing City	Billing address city.	String
Billing State	Billing address state.	String
Billing Country	Billing address country.	String
Billing ZIP Code	Billing address ZIP code.	String
Amount	Simulated Amount.	Number
Base Pay	Base price of the membership plan.	Number
Currency Code	Currency Code.	String

Response Message Description: EnrolmentPaymentProcessing

For a description of this response message, see [Table 277](#).

Table 277. Response Message Description: EnrolmentPaymentProcessing

Node	Description	Type
MemberNumber	Member Number.	String
Status	Status of the Member.	String
Payment Errors	The list of error messages occurred during the enrolment payment processing.	Hierarchy (Integration Object: LOY ENR Payment Errors)

Request Message Description: GeneratePreAllottedMemberships

For a description of this request message, see [Table 278](#).

Table 278. Request Message Description: GeneratePreAllottedMemberships

Node	Description	Type
Program Id	Program ID.	String
Number of Members	The total number of pre-allotted memberships to be generated.	Number

Response Message Description: GeneratePreAllottedMemberships

For a description of this response message, see [Table 279](#).

Table 279. Response Message Description: GeneratePreAllottedMemberships

Node	Description	Type
MemberNumbers	The hierarchy of the list of membership numbers generated in Pre-allotted status.	Hierarchy (Integration Object: LOY Preallotted Member)

Request Message Description: EnrolContactAsMember

For a description of this request message, see [Table 280](#).

Table 280. Request Message Description: EnrolContactAsMember

Node	Description	Type
Account Id	Optional. The ID of the account being enrolled.	String
Accrual Type	Optional. The accrual type.	String
Contact Id	Required. The primary contact ID of the member being enrolled.	String
Enrollment Channel	Optional. The enrollment channel. Valid values are drawn from the LOV LOY_TXN_CHNNL_CD table.	String
Household Id	Optional. The existing household ID.	String
Member Type	Optional. The member type.	String
Membership Scheme Id	Optional. Membership plan corresponding to the member type.	String
Name	Optional. The member name.	String
Program Id	Optional. The existing program to which the member should be enrolled.	String
Referred By Id	Optional. The existing Referred by Member ID.	String

Response Message Description: EnrolContactAsMember

For a description of this response message, see [Table 281](#).

Table 281. Response Message Description: EnrolContactAsMember

Node	Description	Type
Siebel Message	Hierarchy of the Contact Member details. Uses the integration object LOY Member.	Integration Object

Example Package for LoyaltyBatchEnrollment

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \LoyaltyBatchEnrollment \Request.xml
```

Response

See the following file to view the sample code:

...\LoyaltyBatchEnrollment\Response.xml

Interface Description (WSDL) for LoyaltyBatchEnrollment

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

...\LoyaltyBatchEnrollment\WSDL

LoyaltyImportBusinessService

Use this Web Service with the Siebel Loyalty Application to perform all voucher related service operations, such as Voucher Validity Check and Status Change.

LoyaltyImportBusinessService Operations

For a list of operations associated with this Web service, see [Table 282](#).

Table 282. LoyaltyImportBusinessService Operations

Name	Description
VoucherImport	Takes in the File Name, Service Name, Method Name, File Format and Integration Object Name as input, and processes the redemption transactions for those records sent in the File mentioned in the input. Generates the log file with the same file name append with the current timestamp.

Request Message Description: VoucherImport

This operation takes in the File Name, Service Name, Method Name, File Format and Integration Object Name as input and processes the redemption transactions for those records sent in the File mentioned in the input. It generates the log file with the same file name appended with a current timestamp. For a description of this request message, see [Table 283](#).

Table 283. Request Message Description: VoucherImport

Node	Description	Type
File Format	String	Required
File Name	String	Required
IO Name	String	Required
Method Name	String	Required
Service Name	String	Required

Response Message Description: VoucherImport

For a description of this response message, see [Table 284](#).

Table 284. Response Message Description: VoucherImport

Node	Description	Type
ValidFlag	Required	String

Example Package for LoyaltyImportBusinessService

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Interface Description (WSDL) for LoyaltyImportBusinessService

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \LoyaltyImportBusService\LoyaltyImportBusService.wsdl

LoyaltyMemberService

Use this Web service to do the following member service actions:

- Inquire membership details
- Process membership information for Renewal or Cancellation
- Retrieve member service price details
- Purchase or Transfer points

LoyaltyMemberService Operations

For a list of operations associated with this Web service, see [Table 285](#).

Table 285. LoyaltyMemberService Operations

Name	Description
PurchasePointsService	<p>Used for purchasing points.</p> <p>The member provides a membership number, the point type he or she wants to purchase, and the number of points as input. Credit card details must also be given as the service might involve monetary payment. Once the service is complete, output is given as an XML file that shows the transaction number and the order number.</p> <p>Member point balances are updated accordingly and reflected in the Siebel Loyalty application.</p>
TransferPointsService	<p>Used for transferring points to another member.</p> <p>The member provides a membership number, the point type which he or she wants to purchase, and the number of points as input. The transferee member number must also be included as input. Credit card details must also be given as the service might involve monetary payment. Once the service is performed, output is given as an XML file that shows the transaction number and the order number.</p> <p>Members' (transferor and transferee) point balances are updated accordingly and reflected in the Siebel Loyalty application.</p>
LoungePurchaseService	<p>Used to buy or renew Lounge.</p> <p>The member provides a membership number, lounge period type, and lounge period duration along with credit card details. The member must also provide payment mode (Pay, Points, or Points+Pay) along with currency, and point type details as the service might involve payment.</p> <p>After the service is performed, the Member's Lounge details are updated and a transaction detail record is created.</p>
MembershipCancellationService	<p>Used to cancel a loyalty membership.</p> <p>The member provides a membership number and credit card information (using the same credit card used during membership enrollment, or renewal). The loyalty program fee is refunded to the member's credit card, and membership is cancelled.</p>

Table 285. LoyaltyMemberService Operations

Name	Description
RenewMembershipService	<p>Renews the loyalty membership for members who are not enrolled in lifetime membership plans.</p> <p>The member provides a membership number, and membership scheme along with payment details (payment mode, credit card details and point type details) as the input.</p> <p>Membership dates are updated along with the membership scheme after the service is performed successfully.</p>
GetMemberServicePrice	<p>The member provides a membership number, and member service name to obtain price lists in different payment modes.</p> <p>Output is an integration object that can be seen as an XML file.</p>
MemberInquiry	<p>Used to query for a member or members given the member names, member number, and so on.</p> <p>The output details include member loyalty information, contact addresses, phone numbers, and email addresses, and so on.</p>
PromotionEnrolmentForSMS	<p>Rewards members a referral bonus when their social networking friends enroll into promotions.</p>

Request Message Description: PurchasePointsService

For a description of this request message, see [Table 286](#).

Table 286. Request Message Description: PurchasePointsService

Node	Description	Type
Member Number	Required. The requesting member must provide the Siebel Loyalty membership number.	String
Point Type	Required. The purchasing member must specify the type of point that he or she wants to purchase.	String
Points	Required. The purchasing member must specify the number of points that he or she wants to purchase.	String
Billing Address	Member billing address. Required if monetary or credit card details are a part of the transaction.	String
Billing Address2	Members secondary billing address. Required if monetary or credit card details are a part of the transaction.	String
Billing City	Member billing city. Required if monetary or credit card details are a part of the transaction.	String
Billing Country	Member billing country. Required if monetary or credit card details are a part of the transaction.	String

Table 286. Request Message Description: PurchasePointsService

Node	Description	Type
Billing State	Member billing state. Required if monetary or credit card details are a part of the transaction.	String
Billing ZIP Code	Member billing ZIP code. Required if monetary or credit card details are a part of the transaction.	String
CVV Number	CVV number from member credit card. Required if monetary or credit card details are a part of the transaction.	String
Card Holder Name	Credit card holder's name. Required if monetary or credit card details are a part of the transaction.	String
Credit Card Number	Credit card number. Required if monetary or credit card details are a part of the transaction.	String
Credit Card Type	Credit card type, such as Visa, MasterCard, and so on. Required if monetary or credit card details are a part of the transaction.	String
Currency	Currency type used by member. Required if monetary currency is part of the transaction.	String
Expiration Month	Expiration month of member credit cards. Required if monetary or credit card details are a part of the transaction.	String
Expiration Year	Expiration year of member credit card. Required if monetary or credit card details are a part of the transaction.	String
Override Flag	Override flag.	String
Override Pay	Required. If the member wants to override the price details, then the input is Y, if not, then the input is N.	String
Override Reason	The member must specify Override Pay when the Override flag is marked Y. It is the monetary amount overridden by the member.	String
Override Reason Code	A reason for the price list override is stated if this flag is set to Y.	String

Response Message Description: PurchasePointsService

For a description of this response message, see [Table 287](#).

Table 287. Response Message Description: PurchasePointsService

Node	Description	Type
Error Message	Error message given if the transaction fails.	String
Order Id	Order ID of the point purchase service.	String
Quote Id	Quote ID of the point purchase service.	String
Siebel Response Code	Siebel Order Management response code following authorization of a credit card.	String

Table 287. Response Message Description: PurchasePointsService

Node	Description	Type
Siebel Response Message	Siebel Order Management response message following authorization of a credit card.	String
Transaction Number	The transaction number of the point purchase service.	String

Request Message Description: TransferPointService

For a description of this request message, see [Table 288](#).

Table 288. Request Message Description: TransferPointService

Node	Description	Type
Member Number	Required. The requesting member must provide the Siebel Loyalty membership number.	String
Point Type	Required. The purchasing member must specify the type of point that he or she wants to purchase.	String
Points	Required. The purchasing member must specify the number of points that he or she wants to purchase.	String
Transferee Member Number	Required. Transferee membership number to whom the points are to be transferred.	String
Billing Address	Member billing address. Required if monetary or credit card details are a part of the transaction.	String
Billing Address2	Members secondary billing address. Required if monetary or credit card details are a part of the transaction.	String
Billing City	Member billing city. Required if monetary or credit card details are a part of the transaction.	String
Billing Country	Member billing country. Required if monetary or credit card details are a part of the transaction.	String
Billing State	Member billing state. Required if monetary or credit card details are a part of the transaction.	String
Billing ZIP Code	Member billing ZIP code. Required if monetary or credit card details are a part of the transaction.	String
CVV Number	CVV number from member credit card. Required if monetary or credit card details are a part of the transaction.	String
Card Holder Name	Credit card holder's name. Required if monetary or credit card details are a part of the transaction.	String
Credit Card Number	Credit card number. Required if monetary or credit card details are a part of the transaction.	String
Credit Card Type	Credit card type, such as Visa, MasterCard, and so on. Required if monetary or credit card details are a part of the transaction.	String

Table 288. Request Message Description: TransferPointService

Node	Description	Type
Currency	Currency type used by member. Required if monetary currency is part of the transaction.	String
Expiration Month	Expiration month of member credit cards. Required if monetary or credit card details are a part of the transaction.	String
Expiration Year	Expiration year of member credit card. Required if monetary or credit card details are a part of the transaction.	String
Override Flag	Override flag.	String
Override Pay	Required. If the member wants to override the price details, then the input is Y, if not, then the input is N.	String
Override Reason	The member must specify Override Pay when the Override flag is marked Y. It is the monetary amount overridden by the member.	String
Override Reason Code	A reason for the price list override is stated if this flag is set to Y.	String

Response Message Description: TransferPointService

For a description of this response message, see [Table 289](#).

Table 289. Response Message Description: TransferPointService

Node	Description	Type
Error Message	Error message given if the transaction fails.	String
Order Id	Order ID of the point purchase service.	String
Quote Id	Quote ID of the point purchase service.	String
Siebel Response Code	Siebel Order Management response code following authorization of a credit card.	String
Siebel Response Message	Siebel Order Management response message following authorization of a credit card.	String
Transaction Number	The transaction number of the point purchase service.	String

Request Message Description: LoungePurchaseService

For a description of this request message, see [Table 290](#).

Table 290. Request Message Description: LoungePurchaseService

Node	Description	Type
Member Number	Required. The requesting member must provide the Siebel Loyalty Membership Number.	String
Lounge Period Type	Required. Lounge period type as months or years.	String
Lounge Period Duration	Lounge period duration for renewal stated in months or years.	String
Billing Address	Member billing address. Required if monetary or credit card details are a part of the transaction.	String
Billing Address2	Members secondary billing address. Required if monetary or credit card details are a part of the transaction.	String
Billing City	Member billing city. Required if monetary or credit card details are a part of the transaction.	String
Billing Country	Member billing country. Required if monetary or credit card details are a part of the transaction.	String
Billing State	Member billing state. Required if monetary or credit card details are a part of the transaction.	String
Billing ZIP Code	Member billing ZIP code. Required if monetary or credit card details are a part of the transaction.	String
CVV Number	CVV number from member credit card. Required if monetary or credit card details are a part of the transaction.	String
Card Holder Name	Credit card holder's name. Required if monetary or credit card details are a part of the transaction.	String
Credit Card Number	Credit card number. Required if monetary or credit card details are a part of the transaction.	String
Credit Card Type	Credit card type, such as Visa, MasterCard, and so on. Required if monetary or credit card details are a part of the transaction.	String
Currency	Currency type used by member. Required if monetary currency is part of the transaction.	String
Expiration Month	Expiration month of member credit cards. Required if monetary or credit card details are a part of the transaction.	String
Expiration Year	Expiration year of member credit card. Required if monetary or credit card details are a part of the transaction.	String
Override Flag	Override flag.	String
Override Pay	Required. If the member wants to override the price details, then the input is Y, if not, then the input is N.	String

Table 290. Request Message Description: LoungePurchaseService

Node	Description	Type
Override Points	The member must specify Override Pay when the Override flag is marked Y. It is the monetary amount overridden by the member.	String
Override Reason	A reason for the price list override is stated if this flag is set to Y.	String
Override Reason Code,	A reason for the price list override is stated if this flag is set to Y.	String
Payment Mode	Required. Payment mode stated as Points or Points+Pay, or Pay.	String
Point Type	Point type.	String

Response Message Description: LoungePurchaseService

For a description of this response message, see [Table 291](#).

Table 291. Response Message Description: LoungePurchaseService

Node	Description	Type
Error Message	Error message given if the transaction fails.	String
Order Id	Order ID of the point purchase service.	String
Quote Id	Quote ID of the point purchase service.	String
Siebel Response Code	Siebel Order Management response code following authorization of a credit card.	String
Siebel Response Message	Siebel Order Management response message following authorization of a credit card.	String
Transaction Number	The transaction number of the point purchase service.	String

Request Message Description: RenewMembershipService

For a description of this request message, see [Table 292](#).

Table 292. Request Message Description: RenewMembershipService

Node	Description	Type
Member Number	Required. The requesting member must provide the Siebel Loyalty Membership Number.	String
Membership Scheme	Required. The membership scheme to be renewed.	String
Billing Address	Member billing address. Required if monetary or credit card details are a part of the transaction.	String

Table 292. Request Message Description: RenewMembershipService

Node	Description	Type
Billing Address2	Members' secondary billing address. Required if monetary or credit card details are a part of the transaction.	String
Billing City	Member billing city. Required if monetary or credit card details are a part of the transaction.	String
Billing Country	Member billing country. Required if monetary or credit card details are a part of the transaction.	String
Billing State	Member billing state. Required if monetary or credit card details are a part of the transaction.	String
Billing ZIP Code	Member billing ZIP code. Required if monetary or credit card details are a part of the transaction.	String
CVV Number	CVV number from member credit card. Required if monetary or credit card details are a part of the transaction.	String
Card Holder Name	Credit card holder's name. Required if monetary or credit card details are a part of the transaction.	String
Credit Card Number	Credit card number. Required if monetary or credit card details are a part of the transaction.	String
Credit Card Type	Credit card type, such as Visa, MasterCard, and so on. Required if monetary or credit card details are a part of the transaction.	String
Currency	Currency type used by member. Required if monetary currency is part of the transaction.	String
Expiration Month	Expiration month of member credit cards. Required if monetary or credit card details are a part of the transaction.	String
Expiration Year	Expiration year of member credit card. Required if monetary or credit card details are a part of the transaction.	String
Override Flag	Override flag.	String
Override Pay	Required. If the member wants to override the price details, then the input is Y, if not, then the input is N.	String
Override Points	The member must specify Override Pay when the Override flag is marked Y. It is the monetary amount overridden by the member.	String
Override Reason	A reason for the price list override is stated if this flag is set to Y.	String
Override Reason Code	A reason for the price list override is stated if this flag is set to Y.	String
Payment Mode	Required. Payment mode stated as Points or Points+Pay, or Pay.	String
Point Type	Point type.	String

Response Message Description: RenewMembershipService

For a description of this response message, see [Table 293](#).

Table 293. Response Message Description: RenewMembershipService

Node	Description	Type
Error Message	Error message given if the transaction fails.	String
Order Id	Order ID of the point purchase service.	String
Quote Id	Quote ID of the point purchase service.	String
Siebel Response Code	Siebel Order Management response code following authorization of a credit card.	String
Siebel Response Message	Siebel Order Management response message following authorization of a credit card.	String
Transaction Number	The transaction number of the point purchase service.	String

Request Message Description: MembershipCancellationService

For a description of this request message, see [Table 294](#).

Table 294. Request Message Description: MembershipCancellationService

Node	Description	Type
Member Number	Required. The requesting member must provide the Loyalty Membership Number.	String
Fee Refund Basis	Required. Fee refund basis. Values include Prorata or Percentage, or No Refund.	String
Refund Percentage	Refund percentage is to be given if the selected fee refund basis is calculated as a percentage.	String
Cancellation Reason	Reason for the membership cancellation.	String
Cancellation Reason Code	Required. Membership cancellation reason code.	String
Credit Card Number	Credit card number. Required when the refund basis is Percentage or Prorata. The fee is refunded to the credit card number provided that it matches the number previously retained.	String
Credit Card Type	Credit card type, such as Visa, MasterCard, and so on. Required when the refund basis is Percentage or Prorata. The fee is refunded to the credit card number provided that it matches the number previously on file.	String
Expiration Month	Expiration month must match the expiration month of the credit card on file. Required when the refund basis is Percentage or Prorata.	String

Table 294. Request Message Description: MembershipCancellationService

Node	Description	Type
Expiration Year	Expiration year must match the expiration year of the credit card on file. Required when the refund basis is Percentage or Prorata.	String
Override Flag	Required. If the member wants to override the refund price details, then the input is Y, if not, then the input is N.	String
Override Pay	Required. If the member wants to override the price details then the input is Y, if not, then the input is N.	String
Override Reason	Reason for overriding price.	String
Override Reason Code	Override reason code provided if the Override Flag is Y.	String

Response Message Description: MembershipCancellationService

For a description of this response message, see [Table 295](#).

Table 295. Response Message Description: MembershipCancellationService

Node	Description	Type
Currency	Currency in which the fee is refunded.	String
Error Message	Error message if the transaction fails.	String
Order Id	Refund Order ID of the membership cancellation service.	String
Quote Id	Quote ID of the membership cancellation service.	String
Refund Amount	Refund amount.	String
Siebel Response Code	Response code provided by Siebel Order Management after the credit card authorization is sent.	String
Siebel Response Message	Response message given by Siebel Order Management after credit card authorization.	String
Transaction Number	The transaction number of the membership cancellation.	String

Request Message Description: GetMemberServicePrice

For a description of this request message, see [Table 296](#).

Table 296. Request Message Description: GetMemberServicePrice

Node	Description	Type
Member Number	The requesting member must provide the Siebel Loyalty Membership Number.	String
Currency Code	Currency code to return price lists in a given currency.	String
Lounge Period Duration	The Lounge period duration must be provided if the Transaction Sub Type is set to Lounge Purchase.	String

Table 296. Request Message Description: GetMemberServicePrice

Node	Description	Type
Lounge Period Type	Lounge Period type (Months or Years, and so on) must be provided if the Transaction Sub Type is set to Lounge Purchase.	String
Point Type	Point type must be provided if the member wants to see price lists of Points, or Points + Pay mode in the given point type.	String
Points Qty	Number of points to be given if the transaction sub type is set to Purchase Points or Transfer Points.	String
Selected Membership Scheme	Membership scheme included in the input if the Transaction Sub Type is Membership Renewal.	String
Transaction Sub Type	Required. Member Service type. Possible values are: Points Purchase, Transfer Points, Membership Renewal, or Lounge Purchase.	String

Response Message Description: GetMemberServicePrice

For a description of this response message, see [Table 297](#).

Table 297. Response Message Description: GetMemberServicePrice

Node	Description	Type
LOY EAI Transaction	List of price lines, after applying the promotions on the base prices, are given in the output as XML file.	Integration Object

Request Message Description: MemberInquiry

For a description of this request message, see [Table 298](#).

Table 298. Request Message Description: MemberInquiry

Node	Description	Type
Member Number	The requesting member must provide the Siebel Loyalty Membership Number.	String
Email Address	Email address of inquiring member.	String
First Name	Member's first name.	String
Last Name	Member's last name.	String
Middle Name	Member's middle name.	String
Telephone Number	Member's telephone number.	String
Transaction Type	Transaction type must be provided for queries.	String
ZIP Code	ZIP code of the member whose details are to be inquired is given.	String

Response Message Description: GetMemberServicePrice

For a description of this response message, see [Table 299](#).

Table 299. Response Message Description: GetMemberServicePrice

Node	Description	Type
Siebel Message (An instance of the integration object LOY Member Inquiry)	Member details are given in the integration object and can be extracted as XML file.	Integration Object

Request Message Description: PromotionEnrolmentForSMS

For a description of this request message, see [Table 300](#).

Table 300. Request Message Description: PromotionEnrolmentForSMS

Node	Description	Type
Member Number	Required. The member number of the enrollee.	String
Enrolled Promotion Id	Required. The enrolled promotion ID.	String
Incentive Choice	Optional. Incentive choice type.	String
Referred By Member Number	Optional. Member number of referee.	String

Response Message Description: PromotionEnrolmentForSMS

For a description of this response message, see [Table 301](#).

Table 301. Response Message Description: PromotionEnrolmentForSMS

Node	Description	Type
Error Message	Error message.	String
Siebel Message	Transactions in integration object format.	Integration Object

Example Package for LoyaltyMemberServices

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

... \LoyaltyMemberServices \Request.xml

Response

See the following file to view the sample code:

... \LoyaltyMemberServices\Response.xml

Interface Description (WSDL) for LoyaltyMemberServices

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \LoyaltyMemberService\WSDL

LoyaltyRedemptionService

Use this Web service with the Siebel Loyalty application to perform all redemption related operations, including redemption processing, redemption cancellation, voucher reissue, and Siebel Order Management integration.

LoyaltyRedemptionService Operations

For a list of operations associated with this Web service, see [Table 302](#).

Table 302. LoyaltyRedemptionService Operations

Name	Description
GetPriceOptions	Returns available price options for a set of redemption activities. Also returns the point balance of the member in all point types.
GetPriceOptions	Returns available price options with payment mode set as Points or Points+Pay for a set of redemption activities. Also returns the point balance of the member in all point types.
CheckPriceOptions	Returns available price options for a set of redemption activities. Also performs the credit check and returns how much of a loan is required for each point type. If a loan is not possible, then the Web service performs the point-to-pay conversion and returns the prorated pay and points for each transaction.
CheckCredit	Performs the credit check for a given member and point type. Checks whether a loan is required and returns how much of a loan is required to fulfill the redemption transaction.

Table 302. LoyaltyRedemptionService Operations

Name	Description
GetQuote	<p>Returns available price options for a set of redemption activities. Also performs the credit check and returns how much of a loan is required for each point type. If a loan is not possible, then the Web service does the point-to-pay conversion and returns the prorated pay and points for each transaction.</p> <p>This operation also creates a quote using the given redemption activities (transactions), credit card details (optional) and shipping details (optional).</p>
ProcessQuote	<p>Takes Quote ID as input and converts the quote to order and order to redemption transactions, then processes those transactions.</p>
GetTransactionDetails	<p>Takes as input an Order Number and returns the Transaction details (including activities and Transaction Items if any) for the same.</p>
GetRedemptionRefund	<p>Returns the refund in Points or Points plus Pay for a given redemption transaction, which need to be cancelled.</p>
CancelRedemptionTxn	<p>Takes the redemption transaction ID which need to be cancelled and the refund amount (either unmodified, or overridden refund amount got from the GetRedemptionRefund method) and creates the cancellation transaction and processes it.</p>
GetReissueFeeOptions	<p>Returns the different fee options for reissuing the given voucher.</p>
CheckReissueFeeOption	<p>Checks whether a given fee option for a voucher is valid, and whether the member has enough points to pay in this fee option if the payment mode involves Points.</p>
GetReissueQuote	<p>Takes the chosen fee option details for a voucher, credit card details (optional), shipping details (optional), checks whether the fee option is valid, does credit check if the payment mode involves points, and creates a quote with the given data.</p>
ProcessReissueQuote	<p>Takes as input Quote ID, creates Order for Quote, and creates a Loyalty Voucher Reissue transaction and processes it to reissue the voucher.</p>
UpdateQuoteShippingAddress	<p>Takes Quote ID and shipping details and updates the quote with the given shipping address.</p>

Table 302. LoyaltyRedemptionService Operations

Name	Description
AddCreditCardToQuote	Takes Quote ID, credit card details, billing address and updates the quote with the credit card details.
ProcessRealTimeRedemption	Takes as input the transaction data. It checks all pending redemption transactions and verifies the point balance to determine whether the request can be processed. The service also performs a credit check to determine whether a loan is needed for processing the transaction. If a loan is needed, the service creates and processes the loan transaction, and then creates the redemption transaction. It returns the transaction number as output.

Request Message Description: GetPriceOptions

For a description of this request message, see [Table 303](#).

Table 303. Request Message Description: GetPriceOptions

Node	Description	Type
LOY Redemption Txn	Contains the redemption activity details.	Integration Object (Required)

Response Message Description: GetPriceOptions

For a description of this response message, see [Table 304](#).

Table 304. Response Message Description: GetPriceOptions

Node	Description	Type
LOY Redemption Txn	Contains the redemption activity details and the price options for each activity.	Integration Object (Required)
LOY Redemp Points Summary	Contains point balances of the member in all point types.	Integration Object (Required)

Request Message Description: CheckPriceOptions

For a description of this request message, see [Table 305](#).

Table 305. Request Message Description: CheckPriceOptions

Node	Description	Type
LOY Redemption Txn	Contains the redemption activity details.	Integration Object (Required)

Response Message Description: CheckPriceOptions

For a description of this response message, see [Table 306](#).

Table 306. Response Message Description: CheckPriceOptions

Node	Description	Type
LOY Redemption Txn	Contains the redemption activity details and one price option for each activity.	Integration Object
LOY Redemp Points Summary	Point summary for each point type including points to be paid, point balance, loan (if any) and Points to Pay Conversion flag.	Integration Object
Pay	Total amount to be paid if monetary payment is involved.	Number
Pay Currency Code	Currency if monetary payment is involved.	String

Request Message Description: CheckCredit

This operation performs a credit check for a given member and point type. Checks whether loan is required and returns how much of a loan is required to fulfill the redemption transaction. For a description of this request message, see [Table 307](#).

Table 307. Request Message Description: CheckCredit

Node	Description	Type
MemberNumber	Membership number.	String
PointTypeId	ID number for point type.	String
PointsReq	The required number of points.	Number
LoanFlag	Indicates whether loan limit must be considered.	String

Response Message Description: CheckCredit

For a description of this response message, see [Table 308](#).

Table 308. Response Message Description: CheckCredit

Node	Description	Type
CCResult	Required	String
Available Balance	Required	String
EligLoan	Optional	Number
Error Message	Optional	String
LoanAllowed	Required	String
LoanFlag	Optional	String
PointsShortage	Optional	String

Request Message Description: GetQuote

This operation creates a quote using the given redemption activities (transactions), credit card details (optional) and shipping details (optional). For a description of this request message, see [Table 309](#).

Table 309. Request Message Description: GetQuote

Node	Description	Type
LOY Redemption Txn	Contains the redemption activity details.	Integration Object
Billing Address	Address of customer being billed.	String
Billing Address2	Second address, if necessary of customer being billed.	String
Shipping Method	Shipping method, such as Ground, Air or carrier name.	String
Ship To Street Address	Shipping street address.	String
Ship To Street Address 2	Second shipping street address if needed.	String
Ship To State	Shipping state.	String
Ship To Postal Code	Shipping postal code.	String
Ship To Country	Shipping country.	String
Billing City	Billing city, if different from shipping address.	String
Billing Country	Billing country, if different from shipping address.	String
Billing State	Billing state, if different from shipping address.	String
Billing ZIP Code	Billing ZIP code, if different from shipping address.	String
CVV Number	CVV number of the credit card.	String
Card Holder Name	Name of credit card holder.	String
Credit Card Expiration Month	Expiration date of credit card.	String
Credit Card Expiration Year	Expiration year of credit card.	String
Credit Card Line Number	Credit card line number.	String
Credit Card Number	Credit card number.	String
Credit Card Type	Credit cards type, such as Visa, American Express, and so on.	String
Recipient Name	Name of person who will receive shipped goods.	String
Save Shipping Address Flag	Check to save shipping address for future use.	String
Select Primary Shipping Address Flag	Flag to indicate primary address for account.	String

Table 309. Request Message Description: GetQuote

Node	Description	Type
Ship To Address Id	ID for shipping address.	String
Ship To City	City that product is being shipped to.	String

Response Message Description: GetQuote

For a description of this response message, see [Table 310](#).

Table 310. Response Message Description: GetQuote

Node	Description	Type
LOY Redemption Txn	Contains the redemption activity details and one price option for each activity.	Integration Object
LOY Redmp Points Summary	Point Summary for each point type including points to be paid, point balance, loan (if any) and Points to Pay Conversion flag.	Integration Object
Currency Code	Code to indicate which currency being used for translation.	String
Shipping Charge	Shipping charge for transaction.	String
Quote Id	ID of quote that is created.	String
Pay	Total amount of transaction.	Number
Tax	Total taxed charged on transaction.	Number

Request Message Description: ProcessQuote

This operation converts a quote to an order and an order to redemption transactions. It then processes these transactions.

For a description of this request message, see [Table 311](#).

Table 311. Request Message Description: ProcessQuote

Node	Description	Type
Quote Id	String	Required

Response Message Description: Process Quote

For a description of this response message, see [Table 312](#).

Table 312. Response Message Description: Process Quote

Node	Description	Type
Status	Optional	String
Order Id	Required	String

Request Message Description: GetTransactionDetails

For a description of this request message, see [Table 313](#).

Table 313. Request Message Description: GetTransactionDetails

Node	Description	Type
Order Number	Required	String

Response Message Description: GetTransactionDetails

For a description of this response message, see [Table 314](#).

Table 314. Response Message Description: GetTransactionDetails

Node	Description	Type
LOY Redemption Txn	Contains details of the redemption transactions that have been created for this order along with transaction items for each transaction in case of package transaction.	Integration Object.

Request Message Description: GetRedemptionRefund

This operation returns the refund amount for given redemption transaction, which is then cancelled. For a description of this request message, see [Table 315](#).

Table 315. Request Message Description: GetRedemptionRefund

Node	Description	Type
Transaction Id	Required	String

Response Message Description: GetRedemptionRefund

For a description of this response message, see [Table 316](#).

Table 316. Response Message Description: GetRedemptionRefund

Node	Description	Type
Pay	Optional	String
Point Type	Required	String
Points	Required	String
Currency	Optional	String
Payment Type	Required	String

Request Message Description: CancelRedemptionTxn

This operation takes the redemption transaction ID which requires cancellation as well as the refund amount (either the unmodified or overridden refund amount gotten from the GetRedemptionRefund operation) and creates the cancellation transaction and processes it. For a description of this request message, see [Table 317](#).

Table 317. Request Message Description: CancelRedemptionTxn

Node	Description	Type
Override Expiry Date	Optional	String
Override Expiry Date Flag	Optional	String
Override Pay	Optional	String
Override Points	Optional	String
Override Price Flag	Optional	String
Transaction Id	Required	String
Override Reason Code	Optional	String
Payment Mode	Required	String
Simulate Pay	Optional	String
Override Reason	Optional	String

Response Message Description:CancelRedemptionTxn

For a description of this response message, see [Table 318](#).

Table 318. Response Message Description:CancelRedemptionTxn

Node	Description	Type
New Txn Id	ID of the cancelled transaction.	String

Request Message Description: GetReissueFeeOptions

This operation returns available fee options for reissue of a voucher with given ID. For a description of this request message, see [Table 319](#).

Table 319. Request Message Description: GetReissueFeeOptions

Node	Description	Type
Currency Code	Optional	String
Voucher Id	Required	String
Point Type Id	Optional	String
Payment Type Code	Required	String

Response Message Description: GetReissueFeeOptions

For a description of this response message, see [Table 320](#).

Table 320. Response Message Description: GetReissueFeeOptions

Node	Description	Type
Product Point Id	Required	String
Fee Points	Optional	Number
Fee Amount	Optional	Number
Error Message	Optional	String

Request Message Description: GetReissueQuote

This operation takes the chosen fee option details for a voucher, credit card details (optional), shipping details (optional), checks whether the fee option is valid, does credit check if the payment mode involves points, and creates a quote with the given data. For a description of this request message, see [Table 321](#).

Table 321. Request Message Description: GetReissueQuote

Node	Description	Type
Voucher Id	Required	String
Currency Code	Optional	String
Payment Type Code	Required	String
Point Type Id	Optional	String
Override Amount	Optional	Number
Override Flag	Optional	String
Override Points	Optional	Number
Override Reason	Optional	String
Override Reason Code	Optional	String
Billing Address	Optional	String
Billing Address2	Optional	String
Shipping Method	Optional	String
Ship To Street Address 2	Optional	String
Ship To Street Address	Optional	String
Ship To State	Optional	String
Ship To Postal Code	Optional	String
Ship To Country	Optional	String
Billing City	Optional	String

Table 321. Request Message Description: GetReissueQuote

Node	Description	Type
Billing Country	Optional	String
Billing State	Optional	String
Billing ZIP Code	Optional	String
CVV Number	Optional	String
Card Holder Name	Optional	String
Credit Card Expiration Month	Optional	String
Credit Card Expiration Year	Optional	String
Credit Card Number	Optional	String
Credit Card Type	Optional	String
Recipient Name	Optional	String
Save Shipping Address Flag	Optional	String
Select Primary Shipping Address Flag	Optional	String
Ship To Address Id	Optional	String
Ship To City	Optional	String

Response Message Description: GetReissueQuote

For a description of this response message, see [Table 322](#).

Table 322. Response Message Description: GetReissueQuote

Node	Description	Type
Currency Code	Optional	String
Quote Id	Required	String
Error Message	Optional	String
Fee Amount	Optional	Number
Fee Points	Optional	Number
Shipping Charge	Optional	String
Tax Amount	Optional	String
Currency Code	Optional	String

Request Message Description: ProcessReissueQuote

This operation takes as input Quote ID, creates and Order for Quote, and creates a Loyalty Voucher Reissue transaction and processes it to reissue the voucher. For a description of this request message, see [Table 323](#).

Table 323. Request Message Description: ProcessReissueQuote

Node	Description	Type
Quote Id	Required	String

Response Message Description: ProcessReissueQuote

For a description of this response message, see [Table 324](#).

Table 324. Response Message Description: ProcessReissueQuote

Node	Description	Type
Transaction Number	Required	String
Order Number	Required	String
New Voucher Expiry Date	Required	Date
New Voucher Number	Required	String
New Voucher Status	Required	String

Request Message Description: UpdateQuoteShippingAddress

This operation takes the Quote ID and shipping details and updates the quote with the given shipping address. For a description of this request message, see [Table 325](#).

Table 325. Request Message Description: UpdateQuoteShippingAddress

Node	Description	Type
Quote Id	Required	String

Response Message Description: UpdateQuoteShippingAddress

For a description of this response message, see [Table 326](#).

Table 326. Response Message Description: UpdateQuoteShippingAddress

Node	Description	Type
Shipping Charge	Required	String

Request Message Description: AddCreditCardToQuote

This operation takes the Quote ID, credit card details, billing address and updates the quote with the credit card details. For a description of this request message, see [Table 327](#).

Table 327. Request Message Description: AddCreditCardToQuote

Node	Description	Type
Billing Address	Required	String
Billing Address 2	Optional	String
Billing City	Optional	String
Billing Country	Required	String
Billing ZIP Code	Optional	String
CVV Number	Optional	Number
Card Holder Name	Optional	String
Credit Card Number	Optional	Number
Credit Card Type	Optional	String
Expiration Month	Optional	String
Expiration Year	Optional	String

Response Message Description: GetReissueQuote

There are no response messages for this operation.

Request Message Description: ProcessRealTimeRedemption

For a description of this request message, see [Table 328](#).

Table 328. Request Message Description: ProcessRealTimeRedemption

Node	Description	Type
LOY Redemption Txn	Contains the redemption activity details.	Integration Object

Response Message Description: ProcessRealTimeRedemption

For a description of this response message, see [Table 329](#).

Table 329. Response Message Description: ProcessRealTimeRedemption

Node	Description	Type
LOY Redemption Txn	Contains the redemption activity details.	Integration Object
Transaction Number	Required.	String

Example Packages for LoyaltyRedemptionService

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request (GetPriceOptions)

See the following file to view the sample code:

```
...\LoyaltyRedemptionService\GetPriceOptions_request.xml
```

Response (GetPriceOptions)

See the following file to view the sample code:

```
...\LoyaltyRedemptionService\GetPriceOptions_response.xml
```

Request (CheckPriceOptions)

See the following file to view the sample code:

```
...\LoyaltyRedemptionService\CheckPriceOptions_request.xml
```

Response (CheckPriceOptions)

See the following file to view the sample code:

```
...\LoyaltyRedemptionService\CheckPriceOptions_response.xml
```

Request (CheckCredit)

See the following file to view the sample code:

```
...\LoyaltyRedemptionService\CheckCredit_request.xml
```

Response (CheckCredit)

See the following file to view the sample code:

```
...\LoyaltyRedemptionService\CheckCredit_response.xml
```

Request (GetQuote)

See the following file to view the sample code:

```
...\LoyaltyRedemptionService\GetQuote_request.xml
```

Response (GetQuote)

See the following file to view the sample code:

```
...\LoyaltyRedemptionService\GetQuote_response.xml
```

Request (ProcessQuote)

See the following file to view the sample code:

...\LoyaltyRedemptionService\ProcessQuote_request.xml

Response (ProcessQuote)

See the following file to view the sample code:

...\LoyaltyRedemptionService\ProcessQuote_response.xml

Request (GetTransactionDetails)

See the following file to view the sample code:

...\LoyaltyRedemptionService\GetTransactionDetails_request.xml

Response (GetTransactionDetails)

See the following file to view the sample code:

...\LoyaltyRedemptionService\GetTransactionDetails_response.xml

Request (GetRedemptionRefund)

See the following file to view the sample code:

...\LoyaltyRedemptionService\GetRedemptionRefund_request.xml

Response (GetRedemptionRefund)

See the following file to view the sample code:

...\LoyaltyRedemptionService\GetRedemptionRefund_response.xml

Request (CancelRedemptionTxn)

See the following file to view the sample code:

...\LoyaltyRedemptionService\CancelRedemptionTxn_request.xml

Response (CancelRedemptionTxn)

See the following file to view the sample code:

...\LoyaltyRedemptionService\CancelRedemptionTxn_response.xml

Request (GetReissueFeeOptions)

See the following file to view the sample code:

...\LoyaltyRedemptionService\GetReissueFeeOptions_request.xml

Response(GetReissueFeeOptions)

See the following file to view the sample code:

...\LoyaltyRedemptionService\GetReissueFeeOptions_response.xml

Request (GetReissueQuote)

See the following file to view the sample code:

...\LoyaltyRedemptionService\GetReissueQuote_request.xml

Response (GetReissueQuote)

See the following file to view the sample code:

...\LoyaltyRedemptionService\GetReissueQuote_response.xml

Request (ProcessReissueQuote)

See the following file to view the sample code:

...\LoyaltyRedemptionService\ProcessReissueQuote_request.xml

Response(ProcessReissueQuote)

See the following file to view the sample code:

...\LoyaltyRedemptionService\ProcessReissueQuote_response.xml

Request (UpdateQuoteShippingAddress)

See the following file to view the sample code:

...\LoyaltyRedemptionService\UpdateQuoteShippingAddress_request.xml

Response (UpdateQuoteShippingAddress)

See the following file to view the sample code:

...\LoyaltyRedemptionService\UpdateQuoteShippingAddress_response.xml

Request (AddCreditCardToQuote)

See the following file to view the sample code:

...\LoyaltyRedemptionService\AddCreditCardToQuote_request.xml

Response (AddCreditCardToQuote)

See the following file to view the sample code:

...\LoyaltyRedemptionService\AddCreditCardToQuote_response.xml

Request (ProcessRealTimeRedemption)

See the following file to view the sample code:

...\LoyaltyRedemptionService\ProcessRealTimeRedemption_request.xml

Response (ProcessRealTimeRedemption)

See the following file to view the sample code:

...\LoyaltyRedemptionService\ProcessRealTimeRedemption_response.xml

Interface Description (WSDL) for LoyaltyRedemptionService

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

...\LoyaltyRedemptionService\LoyaltyRedemptionService.wsdl

LoyaltyVoucherService

Use this Web service with the Siebel Loyalty Application to perform all Voucher related Web service operations, including Voucher Validity Check and Status Change.

LoyaltyVoucherService Operations

For a list of operations associated with this Web service, see [Table 330](#).

Table 330. LoyaltyVoucherService Operations

Name	Description
VoucherStatusChange	Takes in the membership number, partner name, voucher number, activity date and change the status of the voucher to Used in real time.

Request Message Description: VoucherValidityCheck

This operation takes in the membership number, Partner ID voucher number and activity date, to validate the voucher and return Success, Failure. For a description of this request message, see [Table 331](#).

Table 331. Request Message Description: VoucherValidityCheck

Node	Description	Type
Voucher Number	Required	String
Activity Date	Required	String
Member Number	Required	String
Partner Id	Required	String

Response Message Description: VoucherValidityCheck

For a description of this response message, see [Table 332](#).

Table 332. Response Message Description: VoucherValidityCheck

Node	Description	Type
Valid Flag	Required	String

Request Message Description: VoucherStatusChange

This operation takes in the membership number, partner name, voucher number, activity date and change the status of the voucher to Used in real time. This involves creation of Availment transaction and processing it in real time. For a description of this request message, see [Table 333](#).

Table 333. Request Message Description: VoucherStatusChange

Node	Description	Type
Voucher Number	Optional	String
Member Number	Required	String
Partner Name	Required	String
Activity Date	Required	String
Order Number	Optional	Number

Response Message Description: VoucherStatusChange

For a description of this response message, see [Table 334](#).

Table 334. Response Message Description: VoucherStatusChange

Node	Description	Type
Voucher Number	Optional	String
Order Number	Optional	Number
Voucher Type	Required	String
Return Value	Required	String

Example Package for LoyaltyVoucherService

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

... \LoyaltyVoucherService\Request.xml

Response

See the following file to view the sample code:

```
... \LoyaltyVoucherService\Request.xml
```

Interface Description (WSDL) for LoyaltyVoucherService

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \LoyaltyVoucherService\WSDL
```

LS Clinical CRF Tracking Interface Service

Use this generic ASI-based Web service to query for Case Report Forms (CRFs) for a given Protocol, Region or Protocol Site. An external application invokes this Web service with details such as Protocol Id, Protocol Title, Protocol Number, Protocol Site Id, Region, and so on. No error message is returned in case the Web service search criteria fails to return CRF records.

LS Clinical CRF Tracking Interface Service Operations

For a list of operations associated with this Web service, see [Table 335](#).

Table 335. LS Clinical CRF Tracking Interface Service Operations

Name	Description
QueryById	Returns all Case Report Forms for a specified Protocol Site Id in the "Id" tag.
QueryByExample	Used to query Case Report Form records based on given filter criteria.
QueryPage	Used to query Case Report Form details in pages based on given filter criteria.

Request Message Description: QueryById

For a description of this request message, see [Table 336](#).

Table 336. Request Message Description: QueryById

Node	Description	Type
PrimaryRowId	Required. Specify the Protocol Site RowId value for which the CRF records should be returned.	String
UTCCanonical	This flag is N by default. If this flag is enabled (Y), then data from the Siebel application must be in UTC (Coordinated Universal Time) and canonical format. The data in UTC and canonical format is converted to Siebel Object Manager format as determined by the value of the UTCCanonical flag.	Boolean

Request Message Description: QueryById

For a description of this request message, see [Table 337](#).

Table 337. Request Message Description: QueryById

Node	Description	Type
ClinicalProtocolSite.PlannedSubjects	Number of planned subjects for the site.	Number
ClinicalProtocolSite.AmountCurrencyCode	Current code of the site.	Currency
ClinicalProtocolSite.AmountExchangeDate	Exchange date for the amount at the site.	Date
ClinicalProtocolSite.FirstSubjectEnrolled Date	Date when the subject was first enrolled.	Date
ClinicalProtocolSite.SiteRowId	Protocol site row ID.	Character data
ClinicalProtocolSite.InitiationCompleted Date	Date when the site was initiated.	Date
ClinicalProtocolSite.InvestigatorFirstName	Principal investigator first name.	Character data
ClinicalProtocolSite.InvestigatorLastName	Principal investigator last name	Character data
ClinicalProtocolSite.LastSubjectOffStudy Date	Date when the last subject was terminated.	Date
ClinicalProtocolSite.PrimaryInvestigatorId	Primary investigator's row ID.	Character data
ClinicalProtocolSite.ProtocolId	Protocol row ID.	Character data
ClinicalProtocolSite.ProtocolNumber	Protocol number.	Character data

Table 337. Request Message Description: QueryById

Node	Description	Type
ClinicalProtocolSite.ProtocolSiteId	Protocol site row ID.	Character data
ClinicalProtocolSite.ProtocolStatus	Protocol status.	Character data
ClinicalProtocolSite.ProtocolTitle	Protocol title.	Character data
ClinicalProtocolSite.Region	Region name.	Character data
ClinicalProtocolSite.RegionPlannedSites	Number of planned sites for the region.	Number
ClinicalProtocolSite.RegionPlannedSubjects	Number of planned subjects for the region.	Number
ClinicalProtocolSite.RegionId	Region row ID.	Character data
ClinicalProtocolSite.RegionStatus	Region status.	Character data
ClinicalProtocolSite.SiteAccountRowId	Account row ID for the associated site.	Character data
ClinicalProtocolSite.SiteAccountName	Account name for the associated site.	Character data
ClinicalProtocolSite.SiteNumber	Site number.	Character data
ClinicalProtocolSite.Status	Protocol site status.	Character data
ClinicalProtocolSite.TerminatedDate	Site terminated date.	Date
ClinicalProtocolSite.TotalContractAmount	Total contract amount rolled up for the site.	Currency
LsCrfTrackingBc.NumberofPages	Total number of pages for the CRF record.	Number
LsCrfTrackingBc.ActivityType	Type of activity.	Character data
LsCrfTrackingBc.Category	Category.	Character data
LsCrfTrackingBc.ChartsReviewed	When was the charts reviewed.	UTC Date Time
LsCrfTrackingBc.Comments	Comments.	Character data
LsCrfTrackingBc.CRFRowIdId	CRF Row ID.	Character data
LsCrfTrackingBc.Name2	Name of the CRF.	Character data
LsCrfTrackingBc.PagesVerified	Number of pages verified.	Number
LsCrfTrackingBc.ProtocolRegionId	Region row ID.	Character data
LsCrfTrackingBc.ProtocolSiteId	Protocol site ID.	Character data
LsCrfTrackingBc.ReceivedbyData Management	Date when received by the data management.	UTC Date Time

Table 337. Request Message Description: QueryById

Node	Description	Type
LsCrfTrackingBc.Receivedinhouse	Date when the CRF was received by in-house.	UTC Date Time
LsCrfTrackingBc.Retrieved	Boolean flag indicating whether or not the CRF information was retrieved.	Boolean
LsCrfTrackingBc.RetrievedDate	When the CRF was retrieved.	UTC Date Time
LsCrfTrackingBc.SignedForms	Whether the CRF are signed.	Boolean
LsCrfTrackingBc.SourceVerified	The CRF is source verified.	Boolean
LsCrfTrackingBc.SourceVerifiedDate	When the CRF was source verified.	UTC Date Time
LsCrfTrackingBc.SubjectId	Subject row ID.	Character data
LsCrfTrackingBc.SubjectNumber	Subject number.	Character data

Request Message Description: QueryPage

For a description of this request message, see [Table 338](#).

Table 338. Request Message Description: QueryPage

Node	Description	Type
UTCCanonical	This flag is N by default. If this flag is enabled (Y), then data from the Siebel application must be in UTC (Coordinated Universal Time) and canonical format. The data in UTC and canonical format is converted to Siebel Object Manager format as determined by the value of the UTCCanonical flag.	Boolean
SortSpec	Determines whether the sort order is ascending or descending. Valid values are ASC or DEC.	Character Data
StartRowNum	Determines the starting point for record retrieval. The 0-based index of the record within the recordset.	Number
LastPage	Indicates whether the record being returned is the last record in the record set. Valid values are true or false.	Character Data

Table 338. Request Message Description: QueryPage

Node	Description	Type
PageSize	The number of records to be returned for a component. The default page size is 10. NOTE: There is a server parameter that controls the maximum page size (MaximumPageSize). If the pagesize attribute is greater than the maximum pagesize defined in the server parameter, an error occurs.	Number
ClinicalProtocolSite.PlannedSubjects	Required. Number of planned subjects for the site. Can be either '*' or a valid number.	Number
ClinicalProtocolSite. Searchspec	An optional search specification.	Character Data
ClinicalProtocolSite.AmountCurrencyCode	Required. Currency Code of the site. Can be either '*' or a valid currency amount.	Currency
ClinicalProtocolSite.AmountExchangeDate	Required. Can be either '*' or a valid exchange date for the amount at the site.	Date
ClinicalProtocolSite.FirstSubjectEnrolledDate	Required. Can be either '*' or a valid date when the subject was first enrolled.	Date
ClinicalProtocolSite.SiteRowId	Required. Can be either '*' or a valid protocol site row ID.	Character data
ClinicalProtocolSite.InitiationCompletedDate	Required. Can be either '*' or a valid date when the site was initiated.	Date
ClinicalProtocolSite.InvestigatorFirstName	Required. Can be either '*' or a valid principal investigator first name.	Character data
ClinicalProtocolSite.InvestigatorLastName	Required. Can be either '*' or a valid principal investigator last name.	Character data
ClinicalProtocolSite.LastSubjectOffStudyDate	Required. Can be either '*' or a valid date when the last subject was terminated.	Date
ClinicalProtocolSite.PrimaryInvestigatorId	Required. Can be either '*' or a valid primary investigator's row ID.	Character data
ClinicalProtocolSite.ProtocolId	Required. Can be either '*' or a valid protocol row ID.	Character data

Table 338. Request Message Description: QueryPage

Node	Description	Type
ClinicalProtocolSite. ProtocolNumber	Required. Can be either '*' or a valid protocol number.	Character data
ClinicalProtocolSite. ProtocolSiteId	Required. Can be either '*' or a valid protocol site row ID.	Character data
ClinicalProtocolSite. ProtocolStatus	Required. Can be either '*' or a valid protocol status.	Character data
ClinicalProtocolSite. ProtocolTitle	Required. Can be either '*' or a valid protocol title.	Character data
ClinicalProtocolSite. Region	Required. Can be either '*' or a valid region name.	Character data
ClinicalProtocolSite. RegionPlannedSites	Required. Can be either '*' or a valid number of planned sites for the region.	Number
ClinicalProtocolSite. RegionPlannedSubjects	Required. Can be either '*' or a valid number of planned subjects for the region.	Number
ClinicalProtocolSite. RegionId	Required. Can be either '*' or a valid region row ID.	Character data
ClinicalProtocolSite. RegionStatus	Required. Can be either '*' or a valid region status.	Character data
ClinicalProtocolSite. SiteAccountRowId	Required. Can be either '*' or a valid account row ID for the site associated.	Character data
ClinicalProtocolSite. SiteAccountName	Required. Can be either '*' or a valid account name for the site associated.	Character data
ClinicalProtocolSite. SiteNumber	Required. Can be either '*' or a valid site number.	Character data
ClinicalProtocolSite. Status	Required. Can be either '*' or a valid protocol site status.	Character data
ClinicalProtocolSite. TerminatedDate	Required. Can be either '*' or a valid site terminated date.	Date
ClinicalProtocolSite. TotalContractAmount	Required. Can be either '*' or a valid total contract amount rolled up for the site.	Currency

Table 338. Request Message Description: QueryPage

Node	Description	Type
LsCrfTrackingBc.NumberofPages	Required. Can be either '*' or a valid total number of pages for the CRF record.	Number
LsCrfTrackingBc.Activity Type	Required. Can be either '*' or a valid type of activity.	Character data
LsCrfTrackingBc.Category	Required. Can be either '*' or a valid category.	Character data
LsCrfTrackingBc.ChartsReviewed	Required. Can be either '*' or a valid charts reviewed date.	UTC Date Time
LsCrfTrackingBc.Comments	Required. Can be either '*' or a valid comments.	Character data
LsCrfTrackingBc.CRF RowIdId	Required. Can be either '*' or a valid CRF row ID.	Character data
LsCrfTrackingBc.Name2	Required. Can be either '*' or a valid name of the CRF.	Character data
LsCrfTrackingBc.Pages Verified	Required. Can be either '*' or a valid number of pages verified.	Number
LsCrfTrackingBc.ProtocolRegionId	Required. Can be either '*' or a valid region row ID.	Character data
LsCrfTrackingBc.ProtocolSiteId	Required. Can be either '*' or a valid protocol site ID.	Character data
LsCrfTrackingBc.ReceivedbyData Management	Required. Can be either '*' or a valid Date when received by the data management.	UTC Date Time
LsCrfTrackingBc.Receivedinhouse	Required. Can be either '*' or a valid Date when the CRF was received by the Inhouse.	UTC Date Time
LsCrfTrackingBc.Retrieved	Required. Can be either '*' or a valid Boolean flag if the CRF information is retrieved or not..	Boolean
LsCrfTrackingBc.RetrievedDate	Required. Can be either '*' or a valid CRF retrieved date.	UTC Date Time
LsCrfTrackingBc.SignedForms	Required. Can be either '*' or a valid Boolean value indicating if the CRF is signed.	Boolean

Table 338. Request Message Description: QueryPage

Node	Description	Type
LsCrfTrackingBc.Source Verified	Required. Can be either '*' or a valid Boolean value indicating if the CRF is source verified.	Boolean
LsCrfTrackingBc.Source VerifiedDate	Required. Can be either '*' or a valid date when the CRF was source verified.	UTC Date Time
LsCrfTrackingBc.SubjectId	Required. Can be either '*' or a valid subject row ID.	Character data
LsCrfTrackingBc.SubjectNumber	Required. Can be either '*' or a valid subject number.	Character data

Response Message Description: All LS Clinical CRF Tracking Interface Service Operations

For a description of this response message, see [Table 339](#).

Table 339. ResponseMessage Description: All LS Clinical CRF Tracking Interface Service Operations

Node	Description	Type
ClinicalProtocolSite.PlannedSubjects	Number of planned subjects for the site.	Number
ClinicalProtocolSite.AmountCurrencyCode	Current code of the site.	Currency
ClinicalProtocolSite.AmountExchangeDate	Exchange date for the amount at the site.	Date
ClinicalProtocolSite.FirstSubjectEnrolledDate	Date when the subject was first enrolled.	Date
ClinicalProtocolSite.SiteRowId	Protocol site row ID.	Character data
ClinicalProtocolSite.InitiationCompletedDate	Date when the site was initiated.	Date
ClinicalProtocolSite.InvestigatorFirstName	Principal investigator first name.	Character data
ClinicalProtocolSite.InvestigatorLastName	Principal investigator last name.	Character data
ClinicalProtocolSite.LastSubjectOffStudyDate	Date when the last subject was terminated.	Date
ClinicalProtocolSite.PrimaryInvestigatorId	Primary investigator's row ID.	Character data
ClinicalProtocolSite.ProtocolId	Protocol row ID.	Character data

Table 339. ResponseMessage Description: All LS Clinical CRF Tracking Interface Service Operations

Node	Description	Type
ClinicalProtocolSite.ProtocolNumber	Protocol number.	Character data
ClinicalProtocolSite.ProtocolSiteId	Protocol site row ID.	Character data
ClinicalProtocolSite.ProtocolStatus	Protocol status.	Character data
ClinicalProtocolSite.ProtocolTitle	Protocol title.	Character data
ClinicalProtocolSite.Region	Region name.	Character data
ClinicalProtocolSite.RegionPlanned Sites	Number of planned sites for the region.	Number
ClinicalProtocolSite.RegionPlanned Subjects	Number of planned subjects for the region.	Number
ClinicalProtocolSite.RegionId	Region row ID.	Character data
ClinicalProtocolSite.RegionStatus	Region status.	Character data
ClinicalProtocolSite.SiteAccountRowId	Account row ID for the site associated.	Character data
ClinicalProtocolSite.SiteAccountName	Account name for the site associated.	Character data
ClinicalProtocolSite.SiteNumber	Site number.	Character data
ClinicalProtocolSite.Status	Protocol site status.	Character data
ClinicalProtocolSite.TerminatedDate	Site terminated date.	Date
ClinicalProtocolSite.Total ContractAmount	Total contract amount rolledup for the site.	Currency
LsCrfTrackingBc.NumberofPages	Total number of pages for the CRF record.	Number
LsCrfTrackingBc.Activity Type	Type of activity.	Character data
LsCrfTrackingBc.Category	Category.	Character data
LsCrfTrackingBc.Charts Reviewed	When was the charts reviewed.	UTC Date Time
LsCrfTrackingBc.Comments	Comments.	Character data
LsCrfTrackingBc.CRFRowIdId	CRF row ID.	Character data
LsCrfTrackingBc.Name2	Name of the CRF.	Character data

Table 339. ResponseMessage Description: All LS Clinical CRF Tracking Interface Service Operations

Node	Description	Type
LsCrfTrackingBc.Pages Verified	Number of pages verified.	Number
LsCrfTrackingBc.Protocol RegionId	Region Row ID.	Character data
LsCrfTrackingBc.Protocol SiteId	Protocol site ID.	Character data
LsCrfTrackingBc.Received byDataManagement	Date when received by the data management.	UTC Date Time
LsCrfTrackingBc.Received inhouse	Date when the CRF was received by the in-house.	UTC Date Time
LsCrfTrackingBc.Retrieved	Boolean flag if the CRF information is retrieved or not.	Boolean
LsCrfTrackingBc.RetrievedDate	When the CRF was retrieved.	UTC Date Time
LsCrfTrackingBc.Signed Forms	Whether the CRF are signed.	Boolean
LsCrfTrackingBc.Source Verified	The CRF is source verified.	Boolean
LsCrfTrackingBc.Source VerifiedDate	When the CRF was source verified.	UTC Date Time
LsCrfTrackingBc.SubjectId	Subject row ID.	Character data
LsCrfTrackingBc.Subject Number	Subject number.	Character data

LS Clinical CRF Tracking Interface Service Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 340](#).

Table 340. LS Clinical CRF Tracking Interface Service Service Object

Name	Boundary Object Type	Class
LS Clinical CRF Tracking Interface Service	LS Clinical CRF Tracking Interface Service	CSSEAIUIDataSyncService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 341](#).

Table 341. LS Clinical CRF Tracking Interface Service Data Object

Siebel Repository Name	External Name
LS Clinical CRF Tracking IO	Clinical Protocol Site

Methods

For a description of the methods for this Web service, see [Table 342](#).

Table 342. LS Clinical CRF Tracking Interface Service Methods

Operation	Method
LSclinicalCRFTrackingInterfaceServiceQueryByExample	QueryByExample
LSclinicalCRFTrackingInterfaceServiceQueryById	QueryById
LSclinicalCRFTrackingInterfaceServiceQueryPage	QueryPage

Example Package for LS Clinical CRF Tracking Interface Service

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
...\LSclinical_CRFTracking\LS Clinical CRF Tracking Interface Service-QueryByExample-request.xml
```

```
...\LSclinical_CRFTracking\LS Clinical CRF Tracking Interface Service-QueryById-request.xml
```

```
...\LSclinical_CRFTracking\LS Clinical CRF Tracking Interface Service-QueryPage-request.xml
```

Response

See the following file to view the sample code:

```
...\LSclinical_CRFTracking\LS Clinical CRF Tracking Interface Service-response.xml
```

Interface Description (WSDL) for LS Clinical CRF Tracking Interface Service

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

...\LSclinical_CRFTracking\LS Clinical CRF Tracking Interface Service_QueryByExample.WSDL

...\LSclinical_CRFTracking\LS Clinical CRF Tracking Interface Service_QueryById.WSDL

...\LSclinical_CRFTracking\LS Clinical CRF Tracking Interface Service_QueryPage.WSDL

LS Clinical Protocol Site Interface Service

Use this generic ASI-based Web service to pull information from protocol sites using Protocol Site, Region, or Protocol.

LS Clinical Protocol Interface Service Operations

For a list of operations associated with this Web service, see [Table 343](#).

Table 343. LS Clinical Clinical Protocol Interface Service Operations

Name	Description
QueryById	This operation returns Protocol Site Information for the specified Protocol Site Id in the "Id" tag.
QueryByExample	Used to query all the Sites information based on given filter criteria.
QueryPage	Used to query all the Sites details in pages based on given filter criteria.

Request Message Description: QueryById

For a description of this request message, see [Table 344](#).

Table 344. Request Message Description: QueryById

Name	Description	Type
PrimaryRowId	Required. Specify the Protocol Site RowId value for which the Protocol Site information should be returned.	String
UTCCanonical	This flag is N by default. If this flag is enabled (Y), then data from the Siebel application must be in UTC (Coordinated Universal Time) and canonical format. The data in UTC and canonical format is converted to Siebel Object Manager format as determined by the value of the UTCCanonical flag.	Boolean

Request Message Description: QueryByExample

For a description of this request message, see [Table 345](#).

Table 345. Request Message Description: QueryByExample

Node	Description	Type
ClinicalProtocolSite.CompletedCount	Count of the subjects for which the status tracking visit is completed.	Number
ClinicalProtocolSite.EarlyTerminatedCount	Count of the subjects that are early terminated.	Number
ClinicalProtocolSite.EnrolledCount	Count of the subjects that are successfully enrolled.	Number
ClinicalProtocolSite.PlannedSubjects	Number of planned subjects for the site.	Number
ClinicalProtocolSite.Re-ScreenedCount	Count of the subjects that are rescreened.	Number
ClinicalProtocolSite.ScreenFailuresCount	Count of the subjects that are screen failed.	Number
ClinicalProtocolSite.ScreenedCount	Count of the subjects that are screened successfully failed.	Number
ClinicalProtocolSite.AccountId	Account row ID.	Character data
ClinicalProtocolSite.ActivateSynchronizationFlag	A Boolean flag that indicates if the sites are activated for synchronization. Used for SC-OC integration.	Boolean
ClinicalProtocolSite.PrimarySiteAddress	Primary site address associated for the site. This is used for SC-OC integration.	Character data
ClinicalProtocolSite.PrimarySiteAddressRowId	Primary site address row ID associated for the site. This is used for SC-OC integration.	Character data
ClinicalProtocolSite.SiteAddressType	Site address type.	Character data
ClinicalProtocolSite.AmountCurrencyCode	Currency code of the site	Character data
ClinicalProtocolSite.AmountEarnedToDate	Amount earned by the principal investigator.	Number
ClinicalProtocolSite.AmountExchangeDate	Exchange date for the amount at the site.	Date
ClinicalProtocolSite.AmountPaidToDate	Amount paid by the principal investigator.	Number

Table 345. Request Message Description: QueryByExample

Node	Description	Type
ClinicalProtocolSite.CDMSSite	The integration name used for the protocol or study. This is used for SC-OC integration.	Character data
ClinicalProtocolSite.CDMSStudyId	The RowId of the Study/Protocol. This is used for SC-OC Integration.	Character data
ClinicalProtocolSite.City	City.	Character data
ClinicalProtocolSite.ClinicalProgramId	Program row ID.	Character data
ClinicalProtocolSite.ClinicalProgramName	Program name.	Character data
ClinicalProtocolSite.Country	Country.	Character data
ClinicalProtocolSite.Description	Description.	Character data
ClinicalProtocolSite.Email	Email address.	Character data
ClinicalProtocolSite.FaxNumber	Fax number.	Number
ClinicalProtocolSite.FirstSubjectEnrolledDate	Date when the subject was first enrolled.	Date
ClinicalProtocolSite.SiteRowId	Site row ID.	Character data
ClinicalProtocolSite.InitiationCompletedDate	Date when the subject was first enrolled.	Date
ClinicalProtocolSite.PrimaryInvestigatorFirstName	Principal investigator first name.	Character data
ClinicalProtocolSite.PrimaryInvestigatorLastName	Principal investigator last name.	Character data
ClinicalProtocolSite.LastCompletedDateFlag	Boolean flag value indicates if the reschedule should happen on the last completed date.	Boolean
ClinicalProtocolSite.LastSubjectOffStudyDate	Date when the last subject was terminated.	Date
ClinicalProtocolSite.LocaleId	Locale row ID.	Character data

Table 345. Request Message Description: QueryByExample

Node	Description	Type
ClinicalProtocolSite.Locale Name	Locale name.	Character data
ClinicalProtocolSite.Max EnrollmentNumber	Maximum enrolled subjects.	Number
ClinicalProtocolSite.No SubjectInfoFlag	Boolean flag indicating if the site has no subjects.	Boolean
ClinicalProtocolSite.Phone Number	Phone number.	Character data
ClinicalProtocolSite.PrevCDMSSite	Previous CDMSSite. Used for SC-OC integration.	Character data
ClinicalProtocolSite.PrimaryAddressId	Primary address row ID.	Character data
ClinicalProtocolSite.PrimaryInvestigatorId	Primary investigator row ID.	Character data
ClinicalProtocolSite.PrimaryPositionId	Primary position row ID.	Character data
ClinicalProtocolSite.PrimarySubjectTemplate Id	Primary Subject Template row ID.	Character data
ClinicalProtocolSite.ProtocolId	Protocol row ID.	Character data
ClinicalProtocolSite.ProtocolNumber	Protocol number.	Character data
ClinicalProtocolSite.ProtocolNumberSites Planned	Number of sites planned for the protocol.	Number
ClinicalProtocolSite.ProtocolNumberSubjects Planned	Number of subjects planned for the protocol.	Number
ClinicalProtocolSite.ProtocolProductName	Product name associated to the protocol.	Character data
ClinicalProtocolSite.ProtocolProgram Indication	Program indication associated to the protocol.	Character data
ClinicalProtocolSite.ProtocolSiteId	Protocol site row ID.	Character data
ClinicalProtocolSite.ProtocolStatus	Protocol status.	Character data

Table 345. Request Message Description: QueryByExample

Node	Description	Type
ClinicalProtocolSite.ProtocolTitle	Protocol title.	Character data
ClinicalProtocolSite.Region	Region name.	Character data
ClinicalProtocolSite.RegionPlannedSites	Planned number of sites for the region.	Character data
ClinicalProtocolSite.RegionPlannedSubjects	Planned number of subjects for the region.	Character data
ClinicalProtocolSite.RegionId	Region row ID.	Character data
ClinicalProtocolSite.RegionNoSiteInfoFlag	Boolean flag, indicates if the region has no sites.	Boolean
ClinicalProtocolSite.RegionStatus	Region status.	Character data
ClinicalProtocolSite.RegionsRequiredFlag	Boolean flag, indicates if the regions are mandatory for the protocol.	Boolean
ClinicalProtocolSite.SiteBillToAddressId	Site billed to assigned address row ID.	Character data
ClinicalProtocolSite.SiteBillToContactId	Site billed to assigned contact ID.	Character data
ClinicalProtocolSite.SiteAccountRowId	Account Row Id assigned to the Site	Character data
ClinicalProtocolSite.SiteAccountName	Account name.	Character data
ClinicalProtocolSite.SiteNumber	Site number.	Character data
ClinicalProtocolSite.State	State.	Character data
ClinicalProtocolSite.Status	Status.	Character data
ClinicalProtocolSite.StreetAddress	Street address.	Character data
ClinicalProtocolSite.TerminatedDate	Terminated date.	Date
ClinicalProtocolSite.TimeZone	Time zone in which the site is operating.	Character data
ClinicalProtocolSite.TimeZoneId	Time zone row ID.	Character data

Table 345. Request Message Description: QueryByExample

Node	Description	Type
ClinicalProtocolSite.TotalContractAmount	Total contract amount rolled up for the site.	Number
ClinicalProtocolSite.TotalVATAmount	Total VAT amount rolled up to the site.	Number
ClinicalProtocolSite.WithholdingAmount	Site withholding amount.	Number
ClinicalProtocolSite.WithholdingPercentage	Site withholding amount percentage.	Number
ClinicalProtocolSite.Zip	ZIP code.	Character data
ClinicalProtocolSite.Searchspec	Search specification.	Character data
ClinicalProtocolSite_Position.Division	Division.	Character data
ClinicalProtocolSite_Position.DivisionBU	Division business unit.	Character data
ClinicalProtocolSite_Position.DivisionLocation	Division location.	Character data
ClinicalProtocolSite_Position.IsPrimaryMVG	Boolean flag indicating if the position is primary at the site.	Boolean
ClinicalProtocolSite_Position.Name2	Name.	Character data
ClinicalProtocolSite_Position.RowStatus	Position status.	Character data
ClinicalProtocolSite_Position.SalesRep	Sales representative.	Character data
ClinicalProtocolSite_Position.Searchspec	Search specification.	Character data
ClinicalProtocolSite_SubjectTemplate.IRBApprovalDate	IRB approval date for the associated SVT.	Date
ClinicalProtocolSite_SubjectTemplate.IsPrimaryMVG	Boolean flag indicating if the subject template is primary at the site.	Boolean

Table 345. Request Message Description: QueryByExample

Node	Description	Type
ClinicalProtocolSite_SubjectTemplate.Version	Subject template version.	Character data
ClinicalProtocolSite_SubjectTemplate.Searchspec	Subject template search specification.	Character data

Request Message Description: QueryPage

For a description of this request message, see [Table 346](#).

Table 346. Request Message Description: QueryPage

Name	Description	Type
UTCCanonical	This flag is N by default. If this flag is enabled (Y), then data from the Siebel application must be in UTC (Coordinated Universal Time) and canonical format. The data in UTC and canonical format is converted to Siebel Object Manager format as determined by the value of the UTCCanonical flag.	Boolean
SortSpec	Determines whether the sort order is ascending or descending. Valid values are ASC or DEC.	Character Data
StartRowNum	Determines the starting point for record retrieval. The 0-based index of the record within the recordset.	Number
LastPage	Indicates whether the record being returned is the last record in the record set. Valid values are true or false.	Character Data
PageSize	The number of records to be returned for a component. The default page size is 10. Note that there is a server parameter that controls the maximum page size (MaximumPageSize). If the pagesize attribute is greater than the maximum pagesize defined in the server parameter, an error occurs.	Number
ClinicalProtocolSite.CompletedCount	Required. Can be either '*' or a valid number.	Number

Table 346. Request Message Description: QueryPage

Name	Description	Type
ClinicalProtocolSite.Early TerminatedCount	An optional search specification.	Number
ClinicalProtocolSite.EnrolledCount	Required. Can be either '*' or a valid number.	Number
ClinicalProtocolSite.PlannedSubjects	Required. Can be either '*' or a valid number.	Number
ClinicalProtocolSite.Re-ScreenedCount	Required. Can be either '*' or a valid number.	Number
ClinicalProtocolSite.Screen FailuresCount	Required. Can be either '*' or a valid number.	Number
ClinicalProtocolSite.ScreenedCount	Required. Can be either '*' or a valid number.	Number
ClinicalProtocolSite.AccountId	Required. Can be either '*' or a valid Row ID.	Character data
ClinicalProtocolSite.Activate SynchronizationFlag	Required. Can be either '*' or a valid Boolean value.	Boolean
ClinicalProtocolSite.PrimarySite Address	Required. Can be either '*' or a valid address.	Character data
ClinicalProtocolSite.PrimarySite AddressRowId	Required. Can be either '*' or a valid Address Row ID.	Character data
ClinicalProtocolSite.Site AddressType	Required. Can be either '*' or a valid address type.	Character data
ClinicalProtocolSite.AmountCurrency Code	Required. Can be either '*' or a valid currency code.	Character data
ClinicalProtocolSite.AmountEarnedTo Date	Required. Can be either '*' or a valid number.	Number
ClinicalProtocolSite.AmountExchange Date	Required. Can be either '*' or a valid date.	Date
ClinicalProtocolSite.AmountPaidTo Date	Required. Can be either '*' or a valid date.	Number
ClinicalProtocolSite.CDMS Site	Required. Can be either '*' or a valid study name associated. Used for SC-OC Integration.	Character data
ClinicalProtocolSite.CDMS StudyId	Required. Can be either '*' or a valid study row ID.	Character data

Table 346. Request Message Description: QueryPage

Name	Description	Type
ClinicalProtocolSite.City	Required. Can be either '*' or a valid city name.	Character data
ClinicalProtocolSite.Clinical ProgramId	Required. Can be either '*' or a valid row ID.	Character data
ClinicalProtocolSite.Clinical ProgramName	Required. Can be either '*' or a valid program name.	Character data
ClinicalProtocolSite.Country	Required. Can be either '*' or a valid country name.	Character data
ClinicalProtocolSite.Description	Required. Can be either '*' or a valid description.	Character data
ClinicalProtocolSite.Email	Required. Can be either '*' or a valid email address.	Character data
ClinicalProtocolSite.FaxNumber	Required. Can be either '*' or a valid fax number.	Number
ClinicalProtocolSite.FirstSubjectEnrolledDate	Required. Can be either '*' or a valid date.	Date
ClinicalProtocolSite.SiteRowId	Required. Can be either '*' or a valid row ID.	Character data
ClinicalProtocolSite.InitiationCompletedDate	Required. Can be either '*' or a valid date.	Date
ClinicalProtocolSite.Primary InvestigatorFirstName	Required. Can be either '*' or a valid first name.	Character data
ClinicalProtocolSite.Primary InvestigatorLastName	Required. Can be either '*' or a valid last name.	Character data
ClinicalProtocolSite.Last CompletedDateFlag	Required. Can be either '*' or a valid Boolean value.	Boolean
ClinicalProtocolSite.Last SubjectOffStudyDate	Required. Can be either '*' or a valid date.	Date
ClinicalProtocolSite.LocaleId	Required. Can be either '*' or a valid row ID.	Character data
ClinicalProtocolSite.Locale Name	Required. Can be either '*' or a valid locale.	Character data
ClinicalProtocolSite.Max EnrollmentNumber	Required. Can be either '*' or a valid number.	Number

Table 346. Request Message Description: QueryPage

Name	Description	Type
ClinicalProtocolSite.NoSubjectInfoFlag	Required. Can be either '*' or a valid Boolean value.	Boolean
ClinicalProtocolSite.PhoneNumber	Required. Can be either '*' or a valid phone number.	Character data
ClinicalProtocolSite.PrevCDMSSite	Required. Can be either '*' or a valid PrevcDMSSite value. This is used for SC-OC integration.	Character data
ClinicalProtocolSite.PrimaryAddressId	Required. Can be either '*' or a valid row ID.	Character data
ClinicalProtocolSite.PrimaryInvestigatorId	Required. Can be either '*' or a valid row ID.	Character data
ClinicalProtocolSite.PrimaryPositionId	Required. Can be either '*' or a valid position Row Id.	Character data
ClinicalProtocolSite.PrimarySubjectTemplateId	Required. Can be either '*' or a valid Subject template row ID.	Character data
ClinicalProtocolSite.ProtocolId	Required. Can be either '*' or a valid protocol row ID.	Character data
ClinicalProtocolSite.ProtocolNumber	Required. Can be either '*' or a valid protocol number.	Character data
ClinicalProtocolSite.ProtocolNumberSitesPlanned	Required. Can be either '*' or a valid number.	Number
ClinicalProtocolSite.ProtocolNumberSubjectsPlanned	Required. Can be either '*' or a valid number.	Number
ClinicalProtocolSite.ProtocolProductName	Required. Can be either '*' or a valid number.	Character data
ClinicalProtocolSite.ProtocolProgramIndication	Required. Can be either '*' or a valid program indication.	Character data
ClinicalProtocolSite.ProtocolSiteId	Required. Can be either '*' or a valid protocol site row ID.	Character data
ClinicalProtocolSite.ProtocolStatus	Required. Can be either '*' or a valid protocol status.	Character data
ClinicalProtocolSite.ProtocolTitle	Required. Can be either '*' or a valid protocol title.	Character data
ClinicalProtocolSite.Region	Required. Can be either '*' or a valid region.	Character data

Table 346. Request Message Description: QueryPage

Name	Description	Type
ClinicalProtocolSite.RegionPlannedSites	Required. Can be either '*' or a valid number of planned sites for the region.	Character data
ClinicalProtocolSite.RegionPlannedSubjects	Required. Can be either '*' or a valid number of planned subjects for the region.	Character data
ClinicalProtocolSite.RegionId	Required. Can be either '*' or a valid region ID.	Character data
ClinicalProtocolSite.RegionNoSiteInfoFlag	Required. Can be either '*' or a valid Region No Site Info flag.	Boolean
ClinicalProtocolSite.RegionStatus	Required. Can be either '*' or a valid region status.	Character data
ClinicalProtocolSite.RegionsRequiredFlag	Required. Can be either '*' or a valid Regions Required flag.	Boolean
ClinicalProtocolSite.SiteBillToAddressId	Required. Can be either '*' or a valid Site Bill To Address ID.	Character data
ClinicalProtocolSite.SiteBillToContactId	Required. Can be either '*' or a valid Site Bill To Contact ID.	Character data
ClinicalProtocolSite.SiteAccountRowId	Required. Can be either '*' or a valid Site ID.	Character data
ClinicalProtocolSite.SiteAccountName	Required. Can be either '*' or a valid Site name.	Character data
ClinicalProtocolSite.SiteNumber	Required. Can be either '*' or a valid site number.	Character data
ClinicalProtocolSite.State	Required. Can be either '*' or a valid state.	Character data
ClinicalProtocolSite.Status	Required. Can be either '*' or a valid status.	Character data
ClinicalProtocolSite.StreetAddress	Required. Can be either '*' or a valid street address.	Character data
ClinicalProtocolSite.TerminatedDate	Required. Can be either '*' or a valid terminated date.	Date
ClinicalProtocolSite.TimeZone	Required. Can be either '*' or a valid time zone.	Character data
ClinicalProtocolSite.TimeZoneId	Required. Can be either '*' or a valid time zone ID.	Character data

Table 346. Request Message Description: QueryPage

Name	Description	Type
ClinicalProtocolSite.TotalContractAmount	Required. Can be either '*' or a valid total contract amount.	Number
ClinicalProtocolSite.TotalVATAmount	Required. Can be either '*' or a valid VAT amount.	Number
ClinicalProtocolSite.WithholdingAmount	Required. Can be either '*' or a valid withholding amount.	Number
ClinicalProtocolSite.WithholdingPercentage	Required. Can be either '*' or a valid withholding percentage.	Number
ClinicalProtocolSite.Zip	Required. Can be either '*' or a valid ZIP code.	Character data
ClinicalProtocolSite.Searchspec	Required. Can be either '*' or a valid search specification.	Character data
ClinicalProtocolSite_Position.Division	Required. Can be either '*' or a valid division.	Character data
ClinicalProtocolSite_Position.DivisionBU	Required. Can be either '*' or a valid division business unit.	Character data
ClinicalProtocolSite_Position.DivisionLocation	Required. Can be either '*' or a valid division location.	Character data
ClinicalProtocolSite_Position.IsPrimaryMVG	Required. Can be either '*' or a valid Boolean value.	Boolean
ClinicalProtocolSite_Position.Name2	Required. Can be either '*' or a valid name.	Character data
ClinicalProtocolSite_Position.RowStatus	Required. Can be either '*' or a valid row status.	Character data
ClinicalProtocolSite_Position.SalesRep	Required. Can be either '*' or a valid sales representative.	Character data
ClinicalProtocolSite_Position.Searchspec	Required. Can be either '*' or a valid search specification.	Character data
ClinicalProtocolSite_SubjectTemplate.IRBApprovalDate	Required. Can be either '*' or a valid IRB approval date.	Date
ClinicalProtocolSite_SubjectTemplate.IsPrimaryMVG	Required. Can be either '*' or a valid Boolean value.	Boolean
ClinicalProtocolSite_SubjectTemplate.Version	Required. Can be either '*' or a valid version.	Character data
ClinicalProtocolSite_SubjectTemplate.Searchspec	Required. Can be either '*' or a valid search specification.	Character data

Response Message Description: All LS Clinical Protocol Site Interface Service

For a description of this request message, see [Table 347](#).

Table 347. Response Message Description: All LS Clinical Protocol Site Interface Service

Name	Description	Type
ClinicalProtocolSite.CompletedCount	Count of the subjects for which the status tracking visit is completed.	Number
ClinicalProtocolSite.EarlyTerminatedCount	Count of the subjects that are early terminated.	Number
ClinicalProtocolSite.EnrolledCount	Count of the subjects that are successfully enrolled.	Number
ClinicalProtocolSite.PlannedSubjects	Number of planned subjects for the site.	Number
ClinicalProtocolSite.Re-ScreenedCount	Count of the subjects that are rescreened.	Number
ClinicalProtocolSite.ScreenFailuresCount	Count of the subjects that are screen failed.	Number
ClinicalProtocolSite.ScreenedCount	Count of the subjects that are screened successfully failed.	Number
ClinicalProtocolSite.AccountId	Account row ID.	Character data
ClinicalProtocolSite.ActivateSynchronizationFlag	A Boolean flag which indicates if the sites are activated for synchronization. This is used for SC-OC Integration.	Boolean
ClinicalProtocolSite.PrimarySiteAddress	Primary site address associated for the site. This is used for SC-OC Integration.	Character data
ClinicalProtocolSite.PrimarySiteAddressRowId	Primary site address row ID associated for the site. This is used for SC-OC Integration.	Character data
ClinicalProtocolSite.SiteAddressType	Site address type.	Character data
ClinicalProtocolSite.AmountCurrencyCode	Currency code of the site.	Character data
ClinicalProtocolSite.AmountEarnedToDate	Amount Earned by the primary investigator.	Number
ClinicalProtocolSite.AmountExchangeDate	Exchange date for the amount at the site.	Date
ClinicalProtocolSite.AmountPaidToDate	Amount paid by the primary investigator.	Number

Table 347. Response Message Description: All LS Clinical Protocol Site Interface Service

Name	Description	Type
ClinicalProtocolSite.CDMSSite	The integration name used for the protocol or study. This is used for SC-OC Integration.	Character data
ClinicalProtocolSite.CDMSStudyId	The row ID of the study or protocol. This is used for SC-OC Integration.	Character data
ClinicalProtocolSite.City	City.	Character data
ClinicalProtocolSite.ClinicalProgramId	Program row ID.	Character data
ClinicalProtocolSite.ClinicalProgram Name	Program name.	Character data
ClinicalProtocolSite. Country	Country.	Character data
ClinicalProtocolSite. Description	Description.	Character data
ClinicalProtocolSite.Email	Email address.	Character data
ClinicalProtocolSite.Fax Number	Fax number.	Number
ClinicalProtocolSite.First SubjectEnrolledDate	Date when the subject was first enrolled.	Date
ClinicalProtocolSite.Site RowId	Site row ID.	Character data
ClinicalProtocolSite. InitiationCompletedDate	Date when the subject was first enrolled.	Date
ClinicalProtocolSite.Primary InvestigatorFirstName	Principal investigator first name.	Character data
ClinicalProtocolSite.Primary InvestigatorLastName	Principal investigator last name.	Character data
ClinicalProtocolSite.Last CompletedDateFlag	Boolean flag value indicates if the reschedule should happen on the last completed date.	Boolean
ClinicalProtocolSite.LastSubjectOff StudyDate	Date when the last subject was terminated.	Date
ClinicalProtocolSite.Locale Id	Locale row ID.	Character data
ClinicalProtocolSite.LocaleName	Locale name.	Character data
ClinicalProtocolSite.MaxEnrollment Number	Maximum enrolled subjects.	Number

Table 347. Response Message Description: All LS Clinical Protocol Site Interface Service

Name	Description	Type
ClinicalProtocolSite.NoSubjectInfoFlag	Boolean flag indicating if the sites has no subjects.	Boolean
ClinicalProtocolSite.PhoneNumber	Phone number.	Character data
ClinicalProtocolSite.PrevCDMSSite	Previous CDMSSite. Used for SC-OC Integration.	Character data
ClinicalProtocolSite.PrimaryAddressId	Primary address row ID.	Character data
ClinicalProtocolSite.PrimaryInvestigatorId	Primary investigator row ID.	Character data
ClinicalProtocolSite.PrimaryPositionId	Primary position row ID.	Character data
ClinicalProtocolSite.PrimarySubjectTemplateId	Primary subject template row ID.	Character data
ClinicalProtocolSite.ProtocolId	Protocol row ID.	Character data
ClinicalProtocolSite.ProtocolNumber	Protocol number.	Character data
ClinicalProtocolSite.ProtocolNumberSitesPlanned	Number of sites planned for the protocol.	Number
ClinicalProtocolSite.ProtocolNumberSubjectsPlanned	Number of subjects planned for the protocol.	Number
ClinicalProtocolSite.ProtocolProductName	Product name associated to the protocol.	Character data
ClinicalProtocolSite.ProtocolProgramIndication	Program indication associated to the protocol.	Character data
ClinicalProtocolSite.ProtocolSiteId	Protocol site row ID.	Character data
ClinicalProtocolSite.ProtocolStatus	Protocol status.	Character data
ClinicalProtocolSite.ProtocolTitle	Protocol title.	Character data
ClinicalProtocolSite.Region	Region name.	Character data
ClinicalProtocolSite.RegionPlannedSites	Planned number of sites for the region.	Character data
ClinicalProtocolSite.RegionPlannedSubjects	Planned number of subjects for the region.	Character data
ClinicalProtocolSite.RegionId	Region row ID.	Character data
ClinicalProtocolSite.RegionNoSiteInfoFlag	Boolean flag. It indicates whether the region has no sites.	Boolean
ClinicalProtocolSite.RegionStatus	Region status.	Character data

Table 347. Response Message Description: All LS Clinical Protocol Site Interface Service

Name	Description	Type
ClinicalProtocolSite.RegionsRequiredFlag	Boolean flag, indicates if the regions are mandatory for the protocol	Boolean
ClinicalProtocolSite.SiteBillToAddressId	Site billed to assigned address row ID.	Character data
ClinicalProtocolSite.SiteBillToContactId	Site billed to assigned contact ID.	Character data
ClinicalProtocolSite.SiteAccountRowId	Account row ID assigned to the site.	Character data
ClinicalProtocolSite.SiteAccountName	Account Name.	Character data
ClinicalProtocolSite.SiteNumber	Site Number.	Character data
ClinicalProtocolSite.State	State.	Character data
ClinicalProtocolSite.Status	Status.	Character data
ClinicalProtocolSite.StreetAddress	Street address.	Character data
ClinicalProtocolSite.TerminatedDate	Terminated date.	Date
ClinicalProtocolSite.TimeZone	Time zone in which the site is operating.	Character data
ClinicalProtocolSite.TimeZoneId	Time zone row ID.	Character data
ClinicalProtocolSite.TotalContractAmount	Total contract amount rolled up for the site.	Number
ClinicalProtocolSite.TotalVATAmount	Total VAT amount rolled up to the site.	Number
ClinicalProtocolSite.WithholdingAmount	Site withholding amount.	Number
ClinicalProtocolSite.WithholdingPercentage	Site withholding amount percentage.	Number
ClinicalProtocolSite.Zip	ZIP code.	Character data
ClinicalProtocolSite.Searchspec	Search specification.	Character data
ClinicalProtocolSite_Position.Division	Division.	Character data
ClinicalProtocolSite_Position.DivisionBU	Division business unit.	Character data
ClinicalProtocolSite_Position.DivisionLocation	Division location.	Character data
ClinicalProtocolSite_Position.IsPrimaryMVG	Boolean flag indicating if the position is primary at the site.	Boolean

Table 347. Response Message Description: All LS Clinical Protocol Site Interface Service

Name	Description	Type
ClinicalProtocolSite_ Position.Name2	Name.	Character data
ClinicalProtocolSite_ Position.RowStatus	Position status.	Character data
ClinicalProtocolSite_ Position.SalesRep	Sales representative.	Character data
ClinicalProtocolSite_ Position.Searchspec	Search specification.	Character data
ClinicalProtocolSite_ SubjectTemplate.IRB ApprovalDate	IRB approval date for the associated SVT.	Date
ClinicalProtocolSite_ SubjectTemplate.IsPrimaryMVG	Boolean flag indicating if the subject template is primary at the site.	Boolean
ClinicalProtocolSite_ SubjectTemplate.Version	Subject template version.	Character data
ClinicalProtocolSite_ SubjectTemplate. Searchspec	Subject template search specification.	Character data

LS Clinical Protocol Site Interface Service Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 368](#).

Table 348. LS Clinical Protocol Site Interface Service Service Object

Name	Boundary Object Type	Class
LS Clinical Protocol Site Interface Service	LS Clinical Protocol Site Interface Service	CSSEAIDataSyncService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 369](#).

Table 349. LS Clinical Protocol Site Interface Service Data Object

Siebel Repository Name	External Name
LS Clinical Protocol Site Information IO	Clinical Protocol Site

Methods

For a description of the methods for this Web service, see [Table 342](#).

Table 350. LS Clinical Protocol Site Interface Service Methods

Operation	Method
LSclinicalProtocolSiteInterfaceServiceQueryByExample	QueryByExample
LSclinicalProtocolSiteInterfaceServiceQueryById	QueryById
LSclinicalProtocolSiteInterfaceServiceQueryPage	QueryPage

Example Package for LS Clinical Protocol Site Interface Service

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

... \LSclinical_ProtocolSite\LS_Clinical_Protocol_Site_Interface_Service-QueryByExample-request.xml

... \LSclinical_ProtocolSite\LS_Clinical_Protocol_Site_Interface_Service-QueryById-request.xml

... \LSclinical_ProtocolSite\LS_Clinical_Protocol_Site_Interface_Service-QueryPage-request.xml

Response

See the following file to view the sample code:

... \LSclinical_ProtocolSite\LS_Clinical_Protocol_Site_Interface_Service-response.xml

Interface Description (WSDL) for LS Clinical Protocol Site Interface Service

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

...\LS_Clinical_Protocol\Site\LS_Clinical_Protocol_Site_Interface_Service-QueryByExample.WSDL

...\LS_Clinical_Protocol\Site\LS_Clinical_Protocol_Site_Interface_Service-QueryById.WSDL

...\LS_Clinical_Protocol\Site\LS_Clinical_Protocol_Site_Interface_Service-QueryPage.WSDL

LS Clinical Subject Information Interface Service

Use this generic ASI-based Web service to pull all the subject statuses in a given date range for the protocol, region, or site. An external application invokes this Web service with details such as Protocol Id, Protocol Title, Protocol Number, Protocol Site Id, Region, and so on. No error message is returned in cases where the Web service search criteria fails to return the required subject information.

LS Clinical Protocol Interface Service Operations

For a list of operations associated with this Web service, see [Table 359](#).

Table 351. LS Clinical Clinical Protocol Interface Service Operations

Name	Description
QueryById	This operation returns the subjects with status information for the specified Protocol Site Id in the "Id" tag.
QueryByExample	Used to query status for Subjects based on given filter criteria.
QueryPage	Used to query all the Subject status information in pages based on given filter criteria.

Request Message Description: QueryById

For a description of this request message, see [Table 360](#).

Table 352. Request Message Description: QueryById

Name	Description	Type
PrimaryRowId	Required. Specify the Protocol Site RowId value for which the Protocol Site information should be returned.	Character data
UTCCanonical	This flag is N by default. If this flag is enabled (Y), then data from the Siebel application must be in UTC (Coordinated Universal Time) and canonical format. The data in UTC and canonical format is converted to Siebel Object Manager format as determined by the value of the UTCCanonical flag.	Boolean

Request Message Description: QueryByExample

For a description of this request message, see [Table 353](#).

Table 353. Request Message Description: QueryByExample

Node	Description	Type
ClinicalProtocolSite.PlannedSubjects	Count of the subjects for which the status tracking visit is completed.	Number
ClinicalProtocolSite.AmongCurrencyCode	Amount currency code.	Character data
ClinicalProtocolSite.AmountExchange	Amount exchange date.	Date
ClinicalProtocolSite.FirstSubjectEnroll	First subject enrolled date.	Date
ClinicalProtocolSite.SiteRowId	Site row ID.	Character data
ClinicalProtocolSite.InitiationCompletedDate	Site initiation date.	Date
ClinicalProtocolSite.InvestigatorFirstName	Investigator's first name.	Number
ClinicalProtocolSite.InvestigatorFirstName	Investigator last name.	Character data
ClinicalProtocolSite.LastSubjectOffStudyDate	Last subject terminated date for the site.	Date

Table 353. Request Message Description: QueryByExample

Node	Description	Type
ClinicalProtocolSite.PrimaryInvestigatorId	ID of the primary investigator.	Character data
ClinicalProtocolSite.ProtocolId	Protocol ID.	Character data
ClinicalProtocolSite.ProtocolNumber	Protocol number.	Character data
ClinicalProtocolSite.ProtocolNumberSitesPlanned	Number of sites planned for the protocol.	Number
ClinicalProtocolSite.ProtocolNumberSubjectsPlanned	Number of subjects planned for the protocol.	Number
ClinicalProtocolSite.ProtocolSiteId	Protocol site ID.	Character data
ClinicalProtocolSite.ProtocolStatus	Protocol status.	Character data
ClinicalProtocolSite.ProtocolTitle	Protocol title.	Character data
ClinicalProtocolSite.Region	Region.	Character data
ClinicalProtocolSite.RegionPlannedSites	Number of planned sites for the region.	Number
ClinicalProtocolSite.RegionPlannedSubjects	Number of planned subjects for the region.	Number
ClinicalProtocolSite.RegionId	Region row ID.	Character data
ClinicalProtocolSite.RegionStatus	Region status.	Character data
ClinicalProtocolSite.SiteAccountRowId	Site row ID.	Character data
ClinicalProtocolSite.SiteAccountName	Site name.	Character data
ClinicalProtocolSite.SiteNumber	Site number.	Character data
ClinicalProtocolSite.Status	Status.	Character data
ClinicalProtocolSite.TerminatedDate	Site termination date.	Date

Table 353. Request Message Description: QueryByExample

Node	Description	Type
ClinicalProtocolSite.TotalContractAmount	Total contract amount.	Number
ClinicalProtocolSite.Searchspec	Search specification.	Character data
ClinicalProtocolSite.Comments	Comments.	Character data
ClinicalProtocolSite.EncounterDate	Date of birth.	Date
ClinicalProtocolSite.EarlyTerminatedDate	Early terminated date.	Date
ClinicalProtocolSite.EligibleFlag	Eligible flag.	Boolean
ClinicalProtocolSite.EnrollmentId	Enrollment ID.	Character data
ClinicalProtocolSite.SubjectRowId	Row ID of the subject.	Character data
ClinicalProtocolSite.PrimaryInformedConsentDate	Primary informed consent date for the subject.	Date
ClinicalProtocolSite.ProtocolDeviation	Protocol deviation.	Boolean
ClinicalProtocolSite.ProtocolNumber	Protocol number.	Character data
ClinicalProtocolSite.ProtocolViolation	Protocol violation.	Boolean
ClinicalProtocolSite.RandomizationId	Randomization ID.	Character data
ClinicalProtocolSite.RandomizedDate	Randomized date.	Character data
ClinicalSubject.ScreenFailureReason	Reason excluded.	Character data
ClinicalSubject.ScreenFailureDate	Screen failure date.	Date
ClinicalSubject.SubjectId	Subject initials.	Character data
ClinicalSubject.SubjectNumber	Subject number.	Character data

Table 353. Request Message Description: QueryByExample

Node	Description	Type
ClinicalSubject.Withdrawn Date	Withdrawn date.	Date
ClinicalSubject.Withdrawn Reason	Withdrawn reason.	Character data
ClinicalSubject.Searchspec	Search specification.	Character data
ClinicalSubject_ClinicalSubjectStatus.Status	Subject status.	Character data
ClinicalSubject_ClinicalSubjectStatus.Status Comments	Status comments.	Character data
ClinicalSubject_ClinicalSubjectStatus.StatusDate	Status date.	Date
ClinicalSubject_ClinicalSubjectStatus.VisitType	Visit type.	Character data
ClinicalSubject_ClinicalSubjectStatus.Searchspec	Search specification.	Character data

Request Message Description: QueryPage

For a description of this request message, see [Table 360](#).

Table 354. Request Message Description: QueryPage

Node	Description	Type
UTCCanonical	This flag is N by default. If this flag is Y, then data from the Siebel application must be in UTC (Coordinated Universal Time) and canonical format. The data in UTC and canonical format is converted to Siebel object manager format as determined by the value of the UTCCanonical flag.	Boolean
SortSpec	Determines whether the sort order is ascending or descending. Valid values are ASC or DEC.	Character Data
StartRowNum	Determines the starting point for record retrieval. The 0-based index of the record within the record set.	Number

Table 354. Request Message Description: QueryPage

Node	Description	Type
LastPage	Indicates whether the record being returned is the last record in the record set. Valid values are true or false.	Character Data
PageSize	The number of records to be returned for a component. The default page size is 10. Note that there is a server parameter that controls the maximum page size (MaximumPageSize). If the pagesize attribute is greater than the maximum pagesize defined in the server parameter, an error occurs.	Number
ClinicalProtocolSite.CompletedCount	Required. Can be either '*' or a valid number.	Number
ClinicalProtocolSite.EarlyTerminatedCount	The optional search specification.	Number
ClinicalProtocolSite.EnrolledCount	Required. Can be either '*' or a valid number.	Number
ClinicalProtocolSite.PlannedSubjects	Required. Can be either '*' or a valid number.	Number
ClinicalProtocolSite.Re-ScreenedCount	Required. Can be either '*' or a valid number.	Number
ClinicalProtocolSite.ScreenFailuresCount	Required. Can be either '*' or a valid number.	Number
ClinicalProtocolSite.ScreenedCount	Required. Can be either '*' or a valid number.	Number
ClinicalProtocolSite.AccountId	Required. Can be either '*' or a valid row ID.	Character data
ClinicalProtocolSite.ActivateSynchronizationFlag	Required. Can be either '*' or a valid Boolean value.	Boolean
ClinicalProtocolSite.PrimarySiteAddress	Required. Can be either '*' or a valid address.	Character data
ClinicalProtocolSite.PrimarySiteAddressRowId	Required. Can be either '*' or a valid Address row ID.	Character data
ClinicalProtocolSite.SiteAddressType	Required. Can be either '*' or a valid address type.	Character data

Table 354. Request Message Description: QueryPage

Node	Description	Type
ClinicalProtocolSite.AmountCurrency Code	Required. Can be either '*' or a valid Currency Code.	Character data
ClinicalProtocolSite.AmountEarnedTo Date	Required. Can be either '*' or a valid number.	Number
ClinicalProtocolSite.AmountExchange Date	Required. Can be either '*' or a valid Date.	Date
ClinicalProtocolSite.AmountPaidTo Date	Required. Can be either '*' or a valid Date.	Number
ClinicalProtocolSite.CDMSSite	Required. Can be either '*' or a valid study name associated. Used for SC-OC Integration.	Character data
ClinicalProtocolSite.CDMSSStudyId	Required. Can be either '*' or a valid Study row ID.	Character data
ClinicalProtocolSite.City	Required. Can be either '*' or a valid city name.	Character data
ClinicalProtocolSite.ClinicalProgramId	Required. Can be either '*' or a valid row ID.	Character data
ClinicalProtocolSite.ClinicalProgram Name	Required. Can be either '*' or a valid program name.	Character data
ClinicalProtocolSite.Country	Required. Can be either '*' or a valid country name.	Character data
ClinicalProtocolSite.Description	Required. Can be either '*' or a valid description.	Character data
ClinicalProtocolSite.Email	Required. Can be either '*' or a valid email address.	Character data
ClinicalProtocolSite.FaxNumber	Required. Can be either '*' or a valid fax number.	Number
ClinicalProtocolSite.FirstSubjectEnroll edDate	Required. Can be either '*' or a valid date.	Date
ClinicalProtocolSite.SiteRowId	Required. Can be either '*' or a valid row ID.	Character data
ClinicalProtocolSite.Initiation CompletedDate	Required. Can be either '*' or a valid date.	Date
ClinicalProtocolSite.Primary InvestigatorFirstName	Required. Can be either '*' or a valid first name.	Character data

Table 354. Request Message Description: QueryPage

Node	Description	Type
ClinicalProtocolSite.Primary InvestigatorLastName	Required. Can be either '*' or a valid last name.	Character data
ClinicalProtocolSite.LastCompleted DateFlag	Required. Can be either '*' or a valid Boolean value.	Boolean
ClinicalProtocolSite.LastSubjectOff StudyDate	Required. Can be either '*' or a valid date.	Date
ClinicalProtocolSite.LocaleId	Required. Can be either '*' or a valid row ID.	Character data
ClinicalProtocolSite.LocaleName	Required. Can be either '*' or a valid locale.	Character data
ClinicalProtocolSite.MaxEnrollment Number	Required. Can be either '*' or a valid number.	Number
ClinicalProtocolSite.NoSubjectInfo Flag	Required. Can be either '*' or a valid Boolean value.	Boolean
ClinicalProtocolSite.PhoneNumber	Required. Can be either '*' or a valid phone number.	Character data
ClinicalProtocolSite.PrevCDMSSite	Required. Can be either '*' or a valid PrevcDMSSite value. This is used for SC-OC Integration.	Character data
ClinicalProtocolSite.PrimaryAddressId	Required. Can be either '*' or a valid Row Id.	Character data
ClinicalProtocolSite.Primary InvestigatorId	Required. Can be either '*' or a valid Row Id.	Character data
ClinicalProtocolSite.PrimaryPositionId	Required. Can be either '*' or a valid position row ID.	Character data
ClinicalProtocolSite.PrimarySubject TemplateId	Required. Can be either '*' or a valid subject template row ID.	Character data
ClinicalProtocolSite.ProtocolId	Required. Can be either '*' or a valid protocol row ID.	Character data
ClinicalProtocolSite.ProtocolNumber	Required. Can be either '*' or a valid protocol number.	Character data
ClinicalProtocolSite.ProtocolNumber SitesPlanned	Required. Can be either '*' or a valid number.	Number
ClinicalProtocolSite.ProtocolNumber SubjectsPlanned	Required. Can be either '*' or a valid number.	Number

Table 354. Request Message Description: QueryPage

Node	Description	Type
ClinicalProtocolSite.ProtocolProduct Name	Required. Can be either '*' or a valid number.	Character data
ClinicalProtocolSite.ProtocolProgram Indication	Required. Can be either '*' or a valid program indication.	Character data
ClinicalProtocolSite.ProtocolSiteId	Required. Can be either '*' or a valid protocol site row ID.	Character data
ClinicalProtocolSite.ProtocolStatus	Required. Can be either '*' or a valid protocol status.	Character data
ClinicalProtocolSite.ProtocolTitle	Required. Can be either '*' or a valid protocol title.	Character data
ClinicalProtocolSite.Region	Required. Can be either '*' or a valid region.	Character data
ClinicalProtocolSite.RegionPlanned Sites	Required. Can be either '*' or a valid number of planned sites for the region.	Character data
ClinicalProtocolSite.RegionPlanned Subjects	Required. Can be either '*' or a valid number of planned subjects for the region.	Character data
ClinicalProtocolSite.RegionId	Required. Can be either '*' or a valid region ID.	Character data
ClinicalProtocolSite.RegionNoSiteInfo Flag	Required. Can be either '*' or a valid Region No Site Info flag.	Boolean
ClinicalProtocolSite.RegionStatus	Required. Can be either '*' or a valid region status.	Character data
ClinicalProtocolSite.RegionsRequiredFlag	Required. Can be either '*' or a valid Regions Required flag.	Boolean
ClinicalProtocolSite.SiteBillToAddressId	Required. Can be either '*' or a valid Site Bill To Address ID.	Character data
ClinicalProtocolSite.SiteBillToContactId	Required. Can be either '*' or a valid Site Bill To Contact ID.	Character data
ClinicalProtocolSite.SiteAccountRowId	Required. Can be either '*' or a valid Site ID.	Character data
ClinicalProtocolSite.SiteAccountName	Required. Can be either '*' or a valid site name.	Character data
ClinicalProtocolSite.SiteNumber	Required. Can be either '*' or a valid site number.	Character data

Table 354. Request Message Description: QueryPage

Node	Description	Type
ClinicalProtocolSite.State	Required. Can be either '*' or a valid state.	Character data
ClinicalProtocolSite.Status	Required. Can be either '*' or a valid status.	Character data
ClinicalProtocolSite.StreetAddress	Required. Can be either '*' or a valid street address.	Character data
ClinicalProtocolSite.TerminatedDate	Required. Can be either '*' or a valid terminated date.	Date
ClinicalProtocolSite.TimeZone	Required. Can be either '*' or a valid time zone.	Character data
ClinicalProtocolSite.TimeZoneId	Required. Can be either '*' or a valid Time Zone ID.	Character data
ClinicalProtocolSite.TotalContract Amount	Required. Can be either '*' or a valid total contract amount.	Number
ClinicalProtocolSite.TotalVATAmount	Required. Can be either '*' or a valid VAT amount.	Number
ClinicalProtocolSite.Withholding Amount	Required. Can be either '*' or a valid withholding amount.	Number
ClinicalProtocolSite.Withholding Percentage	Required. Can be either '*' or a valid withholding percentage	Number
ClinicalProtocolSite.Zip	Required. Can be either '*' or a valid ZIP code.	Character data
ClinicalProtocolSite.Searchspec	Required. Can be either '*' or a valid search specification.	Character data
ClinicalProtocolSite_Position.Division	Required. Can be either '*' or a valid division.	Character data
ClinicalProtocolSite_Position.Division BU	Required. Can be either '*' or a valid division business unit.	Character data
ClinicalProtocolSite_Position.Division Location	Required. Can be either '*' or a valid division location.	Character data
ClinicalProtocolSite_Position.Is PrimaryMVG	Required. Can be either '*' or a valid Boolean value.	Boolean
ClinicalProtocolSite_Position.Name2	Required. Can be either '*' or a valid name.	Character data
ClinicalProtocolSite_Position.Row Status	Required. Can be either '*' or a valid row status.	Character data

Table 354. Request Message Description: QueryPage

Node	Description	Type
ClinicalProtocolSite_Position.SalesRep	Required. Can be either '*' or a valid sales representative.	Character data
ClinicalProtocolSite_Position.Searchspec	Required. Can be either '*' or a valid search specification.	Character data
ClinicalProtocolSite_SubjectTemplate.IRBApprovalDate	Required. Can be either '*' or a valid IRB approval date.	Date
ClinicalProtocolSite_SubjectTemplate.IsPrimaryMVG	Required. Can be either '*' or a valid Boolean value.	Boolean
ClinicalProtocolSite_SubjectTemplate.Version	Required. Can be either '*' or a valid Version.	Character data
ClinicalProtocolSite_SubjectTemplate.Searchspec	Required. Can be either '*' or a valid search specification.	Character data

Response Message Description: All LS Clinical Protocol Site Interface Service

For a description of this request message, see [Table 355](#).

Table 355. Response Message Description: All LS Clinical Protocol Site Interface Service

Name	Description	Type
ClinicalProtocolSite.CompletedCount	Count of the subjects for which the status tracking visit is completed.	Number
ClinicalProtocolSite.EarlyTerminatedCount	Count of the subjects that are early terminated.	Number
ClinicalProtocolSite.EnrolledCount	Count of the subjects that are successfully enrolled.	Number
ClinicalProtocolSite.PlannedSubjects	Number of planned subjects for the site.	Number
ClinicalProtocolSite.Re-ScreenedCount	Count of the subjects that are rescreened.	Number
ClinicalProtocolSite.ScreenFailuresCount	Count of the subjects that are screen failed.	Number
ClinicalProtocolSite.ScreenedCount	Count of the subjects that are screened successfully failed.	Number
ClinicalProtocolSite.AccountId	Account row ID.	Character data
ClinicalProtocolSite.ActivateSynchronizationFlag	A Boolean flag which indicates if the sites are activated for synchronization. This is used for SC-OC Integration.	Boolean

Table 355. Response Message Description: All LS Clinical Protocol Site Interface Service

Name	Description	Type
ClinicalProtocolSite.PrimarySite Address	Primary site address associated for the site. This is used for SC-OC Integration.	Character data
ClinicalProtocolSite.PrimarySite AddressRowId	Primary site address row ID associated for the site. This is used for SC-OC Integration.	Character data
ClinicalProtocolSite.SiteAddressType	Site address type.	Character data
ClinicalProtocolSite.AmountCurrency Code	Currency code of the site.	Character data
ClinicalProtocolSite.AmountEarnedTo Date	Amount Earned by the primary investigator.	Number
ClinicalProtocolSite.AmountExchange Date	Exchange date for the amount at the site.	Date
ClinicalProtocolSite.AmountPaidTo Date	Amount paid by the primary investigator.	Number
ClinicalProtocolSite.CDMSSite	The integration name used for the protocol or study. This is used for SC-OC Integration.	Character data
ClinicalProtocolSite.CDMSSStudyId	The row ID of the study or protocol. This is used for SC-OC Integration.	Character data
ClinicalProtocolSite.City	City.	Character data
ClinicalProtocolSite.ClinicalProgramId	Program row ID.	Character data
ClinicalProtocolSite.ClinicalProgram Name	Program name.	Character data
ClinicalProtocolSite. Country	Country.	Character data
ClinicalProtocolSite. Description	Description.	Character data
ClinicalProtocolSite.Email	Email address.	Character data
ClinicalProtocolSite.Fax Number	Fax number.	Number
ClinicalProtocolSite.First SubjectEnrolledDate	Date when the subject was first enrolled.	Date
ClinicalProtocolSite.Site RowId	Site row ID.	Character data
ClinicalProtocolSite. InitiationCompletedDate	Date when the subject was first enrolled.	Date

Table 355. Response Message Description: All LS Clinical Protocol Site Interface Service

Name	Description	Type
ClinicalProtocolSite.Primary InvestigatorFirstName	Principal investigator first name.	Character data
ClinicalProtocolSite.Primary InvestigatorLastName	Principal investigator last name.	Character data
ClinicalProtocolSite.Last CompletedDateFlag	Boolean flag value indicates if the reschedule should happen on the last completed date.	Boolean
ClinicalProtocolSite.LastSubjectOff StudyDate	Date when the last subject was terminated.	Date
ClinicalProtocolSite.Locale Id	Locale row ID.	Character data
ClinicalProtocolSite.LocaleName	Locale name.	Character data
ClinicalProtocolSite.MaxEnrollment Number	Maximum enrolled subjects.	Number
ClinicalProtocolSite.NoSubjectInfo Flag	Boolean flag indicating if the sites has no subjects.	Boolean
ClinicalProtocolSite.PhoneNumber	Phone number.	Character data
ClinicalProtocolSite.PrevCDMSSite	Previous CDMSSite. Used for SC-OC integration.	Character data
ClinicalProtocolSite.PrimaryAddressId	Primary address row ID.	Character data
ClinicalProtocolSite.Primary InvestigatorId	Primary investigator row ID.	Character data
ClinicalProtocolSite.PrimaryPositionId	Primary position row ID.	Character data
ClinicalProtocolSite.PrimarySubject TemplateId	Primary subject template row ID.	Character data
ClinicalProtocolSite.ProtocolId	Protocol row ID.	Character data
ClinicalProtocolSite.ProtocolNumber	Protocol number.	Character data
ClinicalProtocolSite.ProtocolNumber SitesPlanned	Number of sites planned for the protocol.	Number
ClinicalProtocolSite.ProtocolNumber SubjectsPlanned	Number of subjects planned for the protocol.	Number
ClinicalProtocolSite.ProtocolProduct Name	Product name associated to the protocol	Character data
ClinicalProtocolSite.ProtocolProgram Indication	Program indication associated to the protocol	Character data
ClinicalProtocolSite.ProtocolSiteId	Protocol site row ID.	Character data

Table 355. Response Message Description: All LS Clinical Protocol Site Interface Service

Name	Description	Type
ClinicalProtocolSite.ProtocolStatus	Protocol status.	Character data
ClinicalProtocolSite.ProtocolTitle	Protocol title.	Character data
ClinicalProtocolSite.Region	Region name.	Character data
ClinicalProtocolSite.RegionPlanned Sites	Planned number of sites for the region.	Character data
ClinicalProtocolSite.RegionPlanned Subjects	Planned number of subjects for the region.	Character data
ClinicalProtocolSite.Region Id	Region row ID.	Character data
ClinicalProtocolSite.RegionNoSiteInfo Flag	Boolean Flag, indicates if the region has no sites.	Boolean
ClinicalProtocolSite.RegionStatus	Region status.	Character data
ClinicalProtocolSite.RegionsRequired Flag	Boolean flag, indicates if the regions are mandatory for the protocol	Boolean
ClinicalProtocolSite.SiteBillToAddress Id	Site billed to assigned address row ID.	Character data
ClinicalProtocolSite.SiteBillToContact Id	Site billed to assigned contact ID.	Character data
ClinicalProtocolSite.SiteAccountRowId	Account row ID assigned to the site.	Character data
ClinicalProtocolSite.SiteAccountName	Account Name.	Character data
ClinicalProtocolSite.SiteNumber	Site Number.	Character data
ClinicalProtocolSite.State	State.	Character data
ClinicalProtocolSite.Status	Status.	Character data
ClinicalProtocolSite.StreetAddress	Street address.	Character data
ClinicalProtocolSite.TerminatedDate	Terminated date.	Date
ClinicalProtocolSite.TimeZone	Time zone in which the site is operating.	Character data
ClinicalProtocolSite.TimeZoneId	Time zone row ID.	Character data
ClinicalProtocolSite.TotalContract Amount	Total contract amount rolled up for the site.	Number
ClinicalProtocolSite.TotalVATAmount	Total VAT amount rolled up to the site.	Number
ClinicalProtocolSite.Withholding Amount	Site withholding amount.	Number

Table 355. Response Message Description: All LS Clinical Protocol Site Interface Service

Name	Description	Type
ClinicalProtocolSite.WithholdingPercentage	Site withholding amount percentage.	Number
ClinicalProtocolSite.Zip	ZIP code.	Character data
ClinicalProtocolSite.Searchspec	Search specification.	Character data
ClinicalProtocolSite_Position.Division	Division.	Character data
ClinicalProtocolSite_Position.DivisionBU	Division business unit.	Character data
ClinicalProtocolSite_Position.DivisionLocation	Division location.	Character data
ClinicalProtocolSite_Position.IsPrimaryMVG	Boolean flag indicating if the position is primary at the site.	Boolean
ClinicalProtocolSite_Position.Name2	Name.	Character data
ClinicalProtocolSite_Position.RowStatus	Position status.	Character data
ClinicalProtocolSite_Position.SalesRep	Sales representative.	Character data
ClinicalProtocolSite_Position.Searchspec	Search specification.	Character data
ClinicalProtocolSite_SubjectTemplate.IRBApprovalDate	IRB approval date for the associated SVT.	Date
ClinicalProtocolSite_SubjectTemplate.IsPrimaryMVG	Boolean flag indicating if the subject template is primary at the site.	Boolean
ClinicalProtocolSite_SubjectTemplate.Version	Subject Template version.	Character data
ClinicalProtocolSite_SubjectTemplate.Searchspec	Subject Template search specification.	Character data

LS Clinical Protocol Site Interface Service Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 368](#).

Table 356. LS Clinical Protocol Site Interface Service Service Object

Name	Boundary Object Type	Class
LS Clinical Protocol Site Interface Service	LS Clinical Protocol Site Interface Service	CSSEAIDataSyncService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 369](#).

Table 357. LS Clinical Protocol Site Interface Service Data Object

Siebel Repository Name	External Name
LS Clinical Protocol Site Information IO	Clinical Protocol Site

Methods

For a description of the methods for this Web service, see [Table 342](#).

Table 358. LS Clinical Protocol Site Interface Service Methods

Operation	Method
LSclinicalProtocolSiteInterfaceServiceQueryByExample	QueryByExample
LSclinicalProtocolSiteInterfaceServiceQueryById	QueryById
LSclinicalProtocolSiteInterfaceServiceQueryPage	QueryPage

Example Package for LS Clinical Protocol Site Interface Service

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

... \LSclinical_ProtocolSite\LS_Clinical_Protocol_Site_Interface_Service-QueryByExample-request.xml

... \LSclinical_ProtocolSite\LS_Clinical_Protocol_Site_Interface_Service-QueryById-request.xml

... \LSclinical_ProtocolSite\LS_Clinical_Protocol_Site_Interface_Service-QueryPage-request.xml

Response

See the following file to view the sample code:

...\LSclinical_ProtocolSite\LS_Clinical_Protocol_Site_Interface_Service-response.xml

Interface Description (WSDL) for LS Clinical Protocol Site Interface Service

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

...\LSclinical_ProtocolSite\LS_Clinical_Protocol_Site_Interface_Service-QueryByExample.WSDL

...\LSclinical_ProtocolSite\LS_Clinical_Protocol_Site_Interface_Service-QueryById.WSDL

...\LSclinical_ProtocolSite\LS_Clinical_Protocol_Site_Interface_Service-QueryPage.WSDL

LSSGOP_Account

Use this Web service to perform create, update, delete, and query records in the Account object.

LSSGOP_Account Operations

For a list of operations associated with this Web service, see [Table 359](#).

Table 359. LSSGOP_Account Operations

Name	Description
AccountInsert	Creates an account.
AccountUpdate	Updates an existing account.
AccountDelete	Deletes an account.
AccountQueryPage	Queries for an account.

Request Message Description: AccountInsert

For a description of this request message, see [Table 360](#).

Table 360. Request Message Description: AccountInsert

Name	Description	Type
AccountInsert	Creates an account.	String

Response Message Description: AccountInsert

For a description of this request message, see [Table 361](#).

Table 361. Response Message Description: AccountInsert

Name	Description	Type
Id	ID of the newly created account.	String

Request Message Description: AccountUpdate

For a description of this request message, see [Table 362](#).

Table 362. Request Message Description: AccountUpdate

Name	Description	Type
Id	Account ID.	String
Name	Account name.	String
Type	Account type.	String

Response Message Description: AccountUpdate

For a description of this request message, see [Table 363](#).

Table 363. Response Message Description: AccountUpdate

Name	Description	Type
Id	ID of the updated account.	String

Request Message Description: AccountDelete

For a description of this request message, see [Table 364](#).

Table 364. Request Message Description: AccountDelete

Name	Description	Type
Id	ID of the account to be deleted.	String

Response Message Description: AccountDelete

For a description of this request message, see [Table 365](#).

Table 365. Response Message Description: AccountDelete

Name	Description	Type
Id	ID of the deleted account.	String

Request Message Description: AccountQueryPage

For a description of this request message, see [Table 366](#).

Table 366. Request Message Description: AccountQueryPage

Name	Description	Type
Id	ID of the account to be queried upon.	String

Response Message Description: AccountQueryPage

For a description of this request message, see [Table 367](#).

Table 367. Response Message Description: AccountQueryPage

Name	Description	Type
Id	ID of the account.	String

LSSGOP_Account Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 368](#).

Table 368. LSSGOP_Account Service Object

Name	Boundary Object Type	Class
LSSGOP_Account	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 369](#).

Table 369. LSSGOP_Account Data Object

Siebel Repository Name	External Name
LS SGOP_Account	LS SGOP_Account

Interface Description (WSDL) for LSSGOP_Account

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_Account\http_siebel.com_as1_LSSGOP_Account.WSDL

LSSGOP_AccountAddress

Use this Web service to create, update, delete, and query records in the AccountAddresses object.

LSSGOP_AccountAddress Operations

This Web service allows you to create, update, delete and query records in the AccountAddress object. For a list of operations, see [Table 370](#).

Table 370. LSSGOP_AccountAddress Operations

Name	Description
AccountAddressInsert	Creates an accountaddress record.
AccountAddressUpdate	Updates an existing accountaddress record.
AccountAddressDelete	Deletes an accountaddress record.
AccountAddressPage	Queries for an accountaddress record.

Request Message Description: AccountAddressInsert

For a description of this request message, see [Table 371](#).

Table 371. Request Message Description: AccountAddressInsert

Node	Description	Type
AddressId	ID of the address to be associated to an account.	String
AccountId	Account ID to which an address is associated.	String

Response Message Description: AccountAddressInsert

For a description of this response message, see [Table 372](#).

Table 372. Response Message Description: AccountAddressInsert

Node	Description	Type
Id	ID of the newly created accountaddress record.	String

Request Message Description: AccountAddressUpdate

For a description of this request message, see [Table 373](#).

Table 373. Request Message Description: AccountAddressUpdate

Node	Description	Type
Id	ID of the accountaddress record.	String
AddressId	Name of the corresponding record.	String
AccountId	Type of the corresponding record.	String

Response Message Description: AccountAddressUpdate

For a description of this response message, see [Table 374](#).

Table 374. Response Message Description: AccountAddressUpdate

Node	Description	Type
Id	ID of the updated accountaddress record.	String

Request Message Description: AccountAddressDelete

For a description of this request message, see [Table 375](#).

Table 375. Request Message Description: AccountAddressDelete

Node	Description	Type
Id	ID of the accountaddress to be deleted.	String

Response Message Description: AccountAddressDelete

For a description of this response message, see [Table 376](#).

Table 376. Response Message Description: AccountAddressDelete

Node	Description	Type
Id	ID of the deleted accountaddress record.	.String

Request Message Description: AccountAddressQueryPage

For a description of this request message, see [Table 377](#).

Table 377. Request Message Description: AccountAddressQueryPage

Node	Description	Type
Id	ID of the accountaddress record to be queried.	String

Response Message Description: AccountAddressQueryPage

For a description of this response message, see [Table 378](#).

Table 378. Response Message Description: AccountAddressQueryPage

Node	Description	Type
Id	ID of the accountaddress record.	String

LSSGOP_AccountAddress Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 379](#).

Table 379. LSSGOP_AccountAddress Service Object

Name	Boundary Object Type	Class
LSSGOP_AccountAddress	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 380](#).

Table 380. LSSGOP_AccountAddress Data Object

Siebel Repository Name	External Name
LS SGOP_AccountAddress	LS SGOP_AccountAddress

Interface Description (WSDL) for LSSGOP_AccountAddress

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_AccountAddress\http_siebel.com_as1_LSSGOP_AccountAddress.WSDL

LSSGOP_Activity

Use this Web service to create, update, delete and query the Activity object.

LSSGOP_Activity Operations

This Web service allows you to create, update, delete, and query the Activity object. For a list of operations, [Table 381](#).

Table 381. LSSGOP_Activity Operations

Name	Description
ActivityInsert	Creates an activity.
ActivityUpdate	Updates an existing activity.
ActivityDelete	Deletes an activity.
ActivityQueryPage	Queries for an activity.

Request Message Description: ActivityInsert

For Contact Call, pass only the Contact ID and for Account Call, pass only the Account ID. For a description of this request message, see [Table 382](#).

Table 382. Request Message Description: ActivityInsert

Node	Description	Type
ContactId	ID of the contact.	String
AccountId	ID of the account.	String

Response Message Description: ActivityInsert

For a description of this response message, see [Table 383](#).

Table 383. Response Message Description: ActivityInsert

Node	Description	Type
Id	ID of the newly created activity.	String

Request Message Description: ActivityUpdate

For a description of this request message, see [Table 384](#).

Table 384. Request Message Description: ActivityUpdate

Node	Description	Type
Id	ID of the activity.	String
ContactId	Contact ID of the activity.	String
AccountId	Account ID of the activity.	String

Response Message Description: ActivityUpdate

For a description of this response message, see [Table 385](#).

Table 385. Response Message Description: ActivityUpdate

Node	Description	Type
Id	ID of the updated activity.	String

Request Message Description: ActivityDelete

For a description of this request message, see [Table 386](#).

Table 386. Request Message Description: ActivityDelete

Node	Description	Type
Id	ID of the activity to be deleted.	String

Response Message Description: ActivityDelete

For a description of this response message, see [Table 387](#).

Table 387. Response Message Description: ActivityDelete

Node	Description	Type
Id	ID of the deleted activity.	String

Request Message Description: ActivityQueryPage

For a description of this request message, see [Table 388](#).

Table 388. Request Message Description: ActivityQueryPage

Node	Description	Type
Id	ID of the activity to be queried.	String

Response Message Description: ActivityQueryPage

For a description of this response message, see [Table 389](#).

Table 389. Response Message Description: ActivityQueryPage

Node	Description	Type
Id	ID of the activity.	String

LSSGOP_Activity Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 390](#).

Table 390. LSSGOP_Activity Service Object

Name	Boundary Object Type	Class
LSSGOP_Activity	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 391](#).

Table 391. LSSGOP_Activity Data Object

Siebel Repository Name	External Name
LS SGOP_Activity	LS SGOP_Activity

Interface Description (WSDL) for LSSGOP_Activity

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_Activity\http_siebel.com_asl_LSSGOP_Activity.WSDL

LSSGOP_ActivityContact

Use this Web service to create, update, delete, and query records in the ActivityContacts object.

LSSGOP_ActivityContact Operations

This Web service allows you to create, update, delete, and query records in the ActivityContact object. For a list of operations, see [Table 392](#).

Table 392. LSSGOP_ActivityContact Operations

Name	Description
ActivityContactInsert	Creates an activitycontact record.
ActivityContactUpdate	Updates an existing activitycontact record.
ActivityContactDelete	Deletes an activitycontact record.
ActivityContactQueryPage	Queries for an activitycontact record.

Request Message Description: ActivityContactInsert

For a description of this request message, see [Table 393](#).

Table 393. Request Message Description: ActivityContactInsert

Node	Description	Type
ActivityId	Activity ID.	String
ContactId	Contact ID.	String

Response Message Description: ActivityContactInsert

For a description of this response message, see [Table 394](#).

Table 394. Response Message Description: ActivityContactInsert

Node	Description	Type
Id	ID of the newly created activitycontact record.	String

Request Message Description: ActivityContactUpdate

For a description of this request message, see [Table 395](#).

Table 395. Request Message Description: ActivityContactUpdate

Node	Description	Type
Id	ID of the activitycontact record.	String
ActivityId	ActivityId of the activitycontact record.	String
ContactId	ContactId of the activitycontact record.	String

Response Message Description: ActivityContactUpdate

For a description of this response message, see [Table 396](#).

Table 396. Response Message Description: ActivityContactUpdate

Node	Description	Type
Id	ID of the updated activitycontact record.	String

Request Message Description: ActivityContactDelete

For a description of this request message, see [Table 397](#).

Table 397. Request Message Description: ActivityContactDelete

Node	Description	Type
Id	ID of the activitycontact record to be deleted.	String

Response Message Description: ActivityContactDelete

For a description of this response message, see [Table 398](#).

Table 398. Request Message Description: ActivityContactDelete

Node	Description	Type
Id	ID of the activitycontact record to be deleted.	String

Request Message Description: ActivityContactQueryPage

For a description of this request message, see [Table 399](#).

Table 399. Request Message Description: ActivityContactQueryPage

Node	Description	Type
Id	ID of the activitycontact record to be queried.	String

Response Message Description: AccountQueryPage

For a description of this response message, see [Table 400](#).

Table 400. Response Message Description: AccountQueryPage

Node	Description	Type
Id	ID of the activitycontact record.	String

LSSGOP_ActivityContact Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 401](#).

Table 401. LSSGOP_ActivityContact Service Object

Name	Boundary Object Type	Class
LSSGOP_ActivityContact	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 402](#).

Table 402. LSSGOP_ActivityContact Data Object

Siebel Repository Name	External Name
LS SGOP_ActivityContact	LS SGOP_ActivityContact

Interface Description (WSDL) for LSSGOP_ActivityContact

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_ActivityContact\http_siebel.com_asl_LSSGOP_ActivityContact.WSDL

LSSGOP_CatalogCategory

Use this Web service to create, update, delete, and query records in the CatalogCategory object.

LSSGOP_CatalogCategory Operations

This Web service allows you to create, update, delete, and query records in the CatalogCategory object. For a list of operations, see [Table 403](#).

Table 403. LSSGOP_CatalogCategory Operations

Name	Description
CatalogCategoryInsert	Creates a catalogcategory record.
CatalogCategoryUpdate	Updates an existing catalogcategory record.
CatalogCategoryDelete	Deletes a catalogcategory record.
CatalogCategoryQueryPage	Queries for a catalogcategory record.

Request Message Description: CatalogCategoryInsert

For a description of this request message, see [Table 404](#).

Table 404. Request Message Description: CatalogCategoryInsert

Node	Description	Type
Name	Name of the catalog to be inserted.	String

Response Message Description: CatalogCategoryInsert

For a description of this response message, see [Table 405](#).

Table 405. Response Message Description: CatalogCategoryInsert

Node	Description	Type
Id	ID of the newly created catalogcategory record.	String

Request Message Description: CatalogCategoryUpdate

For a description of this request message, see [Table 406](#).

Table 406. Request Message Description: CatalogCategoryUpdate

Node	Description	Type
Id	ID of the catalogcategory record.	String
Name	Name of the catalogcategory record.	String

Response Message Description: CatalogCategoryUpdate

For a description of this response message, see [Table 407](#).

Table 407. Response Message Description: CatalogCategoryUpdate

Node	Description	Type
Id	ID of the updated catalogcategory record.	String

Request Message Description: CatalogCategoryDelete

For a description of this request message, see [Table 408](#).

Table 408. Request Message Description: CatalogCategoryDelete

Node	Description	Type
Id	ID of the catalogcategory record to be deleted.	String

Response Message Description: CatalogCategoryDelete

For a description of this response message, see [Table 409](#).

Table 409. Response Message Description: CatalogCategoryDelete

Node	Description	Type
Id	ID of the deleted catalogcategory record.	String

Request Message Description: CatalogCategoryQueryPage

For a description of this request message, see [Table 410](#).

Table 410. Request Message Description: CatalogCategoryQueryPage

Node	Description	Type
Id	ID of the catalogcategory record to be queried.	String

Response Message Description: CatalogCategoryQueryPage

For a description of this response message, see [Table 411](#).

Table 411. Response Message Description: CatalogCategoryQueryPage

Node	Description	Type
Id	ID of the catalogcategory record.	String

LSSGOP_CatalogCategory Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 412](#).

Table 412. LSSGOP_CatalogCategory Service Object

Name	Boundary Object Type	Class
LSSGOP_CatalogCategory	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 413](#).

Table 413. LSSGOP_CatalogCategory Data Object

Siebel Repository Name	External Name
LS SGOP_CatalogCategory	LS SGOP_CatalogCategory

Interface Description (WSDL) for LSSGOP_CatalogCategory

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_CatalogCategory\http_siebel.com_asl_LSSGOP_CatalogCategory.WSDL

LSSGOP_Contact

Use this Web service to create, update, delete, and query records in the Contact object.

LSSGOP_Contact Operations

This Web service allows you to create, update, delete, and query records in the Contact object. For a list of operations, see [Table 414](#).

Table 414. LSSGOP_Contact Operations

Name	Description
ContactInsert	Creates a contact.
ContactUpdate	Updates an existing contact.
ContactDelete	Deletes a contact.
ContactQueryPage	Queries for a contact.

Request Message Description: ContactInsert

For a description of this request message, see [Table 415](#).

Table 415. Request Message Description: ContactInsert

Node	Description	Type
FirstName	First name of the new contact to be inserted.	String
LastName	Last name of the new contact to be inserted.	String
PersonUID	A unique person ID.	String

Response Message Description: ContactInsert

For a description of this response message, see [Table 416](#).

Table 416. Response Message Description: ContactInsert

Node	Description	Type
Id	ID of the newly created contact.	String

Request Message Description: ContactUpdate

For a description of this request message, see [Table 417](#).

Table 417. Request Message Description: ContactUpdate

Node	Description	Type
Id	ID of the contact.	String
FirstName	First name of the contact.	String
LastName	Last name of the contact.	String
PersonUIId	Person UIId of the contact.	String

Response Message Description: ContactUpdate

For a description of this response message, see [Table 418](#).

Table 418. Response Message Description: ContactUpdate

Node	Description	Type
Id	ID of the updated contact.	String

Request Message Description: ContactDelete

For a description of this request message, see [Table 419](#).

Table 419. Request Message Description: ContactDelete

Node	Description	Type
Id	ID of the contact to be deleted.	String

Response Message Description: ContactDelete

For a description of this response message, see [Table 420](#).

Table 420. Response Message Description: ContactDelete

Node	Description	Type
Id	ID of the deleted contact.	String

Request Message Description: ContactQueryPage

For a description of this request message, see [Table 421](#).

Table 421. Request Message Description: ContactQueryPage

Node	Description	Type
Id	ID of the contact to be queried.	String

Response Message Description: ContactQueryPage

For a description of this response message, see [Table 422](#).

Table 422. Response Message Description: ContactQueryPage

Node	Description	Type
Id	ID of the contact.	String

LSSGOP_Contact Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 423](#).

Table 423. LSSGOP_Contact Service Object

Name	Boundary Object Type	Class
LSSGOP_Contact	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 424](#).

Table 424. LSSGOP_Contact Data Object

Siebel Repository Name	External Name
LS SGOP_Contact	LS SGOP_Contact

Interface Description (WSDL) for LSSGOP_Contact

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_Contact\http_siebel.com_as_i_LSSGOP_Contact.WSDL

LSSGOP_ContactAccount

Use this Web service to create, update, delete, and query records in the Contact Account object.

LSSGOP_ContactAccount Operations

This Web service allows you to create, update, delete and query the ContactAccount object. For a list of operations, see [Table 425](#).

Table 425. LSSGOP_ContactAccount Operations

Name	Description
ContactAccountInsert	Creates a contactaccount record.
ContactAccountUpdate	Updates an existing contactaccount record.
ContactAccountDelete	Deletes a contactaccount record.
ContactAccountQueryPage	Queries for a contactaccount record.

Request Message Description: ContactAccountInsert

For a description of this request message, see [Table 426](#).

Table 426. Request Message Description: ContactAccountInsert

Node	Description	Type
ContactId	ID of a contact.	String
AccountId	ID of an account.	String

Response Message Description: ContactAccountInsert

For a description of this response message, see [Table 427](#).

Table 427. Response Message Description: ContactAccountInsert

Node	Description	Type
Id	ID of the newly created contactaccount record.	String

Request Message Description: ContactAccountUpdate

For a description of this request message, see [Table 428](#).

Table 428. Request Message Description: ContactAccountUpdate

Node	Description	Type
Id	ID of the contactaccount record.	String
ContactId	ContactId of the corresponding record.	String
AccountId	AccountId of the corresponding record.	String

Response Message Description: ContactAccountUpdate

For a description of this response message, see [Table 429](#).

Table 429. Response Message Description: ContactAccountUpdate

Node	Description	Type
Id	ID of the updated contactaccount.	String

Request Message Description: ContactAccountDelete

For a description of this request message, see [Table 430](#).

Table 430. Request Message Description: ContactAccountDelete

Node	Description	Type
Id	ID of the contactaccount record to be deleted.	String

Response Message Description: ContactAccountDelete

For a description of this response message, see [Table 431](#).

Table 431. Response Message Description: ContactAccountDelete

Node	Description	Type
Id	ID of the deleted contactaccount record.	String

Request Message Description: ContactAccountQueryPage

For a description of this request message, see [Table 432](#).

Table 432. Request Message Description: ContactAccountQueryPage

Node	Description	Type
Id	ID of the contactaccount to be queried record.	String

Response Message Description: ContactAccountQueryPage

For a description of this response message, see [Table 433](#).

Table 433. Response Message Description: ContactAccountQueryPage

Node	Description	Type
Id	ID of the contactaccount record.	String

LSSGOP_ContactAccount Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 434](#).

Table 434. LSSGOP_ContactAccount Service Object

Name	Boundary Object Type	Class
LSSGOP_ContactAccount	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 435](#).

Table 435. LSSGOP_ContactAccount Data Object

Siebel Repository Name	External Name
LS SGOP_ContactAccount	LS SGOP_ContactAccount

Interface Description (WSDL) for LSSGOP_ContactAccount

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

...LSSGOP_ContactAccount\http_siebel.com_asl_LSSGOP_ContactAccount.WSDL

LSSGOP_ContactAddress

Use this Web service to create, update, delete, and query records in the ContactAddress object.

LSSGOP_ContactAddress Operations

This Web service allows you to create, update, delete, and query records in the ContactAddress object. For a list of operations, see [Table 436](#).

Table 436. LSSGOP_ContactAddress Operations

Name	Description
ContactAddressInsert	Creates a new contactaddress record.
ContactAddressUpdate	Updates an existing contactaddress record.
ContactAddressDelete	Deletes a contactaddress record.
ContactAddressQueryPage	Queries for a contactaddress record.

Request Message Description: ContactAddressInsert

For a description of this request message, see [Table 437](#).

Table 437. Request Message Description: ContactAddressInsert

Node	Description	Type
ContactId	ID of the contact to be inserted.	String
AddressId	ID of the address to associate to the contact.	String

Response Message Description: ContactAddressInsert

For a description of this response message, see [Table 438](#).

Table 438. Response Message Description: ContactAddressInsert

Node	Description	Type
Id	ID of the newly created contactaddress record.	String

Request Message Description: ContactAddressUpdate

For a description of this request message, see [Table 439](#).

Table 439. Request Message Description: ContactAddressUpdate

Node	Description	Type
Id	ID of the contactaddress record.	String
ContactId	Contact ID of the corresponding record.	String
AddressId	Address ID of the corresponding record.	String

Response Message Description: ContactAddressUpdate

For a description of this response message, see [Table 440](#).

Table 440. Response Message Description: ContactAddressUpdate

Node	Description	Type
Id	ID of the updated contactaddress record.	String

Request Message Description: ContactAddressDelete

For a description of this request message, see [Table 441](#).

Table 441. Request Message Description: ContactAddressDelete

Node	Description	Type
Id	ID of the contactaddress record to be deleted.	String

Response Message Description: ContactAddressDelete

For a description of this response message, see [Table 442](#).

Table 442. Response Message Description: ContactAddressDelete

Node	Description	Type
Id	ID of the deleted contactaddress record.	String

Request Message Description: ContactAddressQueryPage

For a description of this request message, see [Table 443](#).

Table 443. Request Message Description: ContactAddressQueryPage

Node	Description	Type
Id	ID of the contactaddress record to be queried.	String

Response Message Description: ContactAddressQueryPage

For a description of this response message, see [Table 444](#).

Table 444. Response Message Description: ContactAddressQueryPage

Node	Description	Type
Id	ID of the contactaddress record.	String

LSSGOP_ContactAddress Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 445](#).

Table 445. LSSGOP_ContactAddress Service Object

Name	Boundary Object Type	Class
LSSGOP_ContactAddress	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 446](#).

Table 446. LSSGOP_ContactAddress Data Object

Siebel Repository Name	External Name
LS SGOP_ContactAddress	LS SGOP_ContactAddress

Interface Description (WSDL) for LSSGOP_ContactAddress

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_ContactAddress\http_siebel.com_asl_LSSGOP_ContactAddress.WSDL

LSSGOP_ContactBestTime

Use this Web service to create, update, delete, and query records in the ContactBestTime object.

LSSGOP_ContactBestTime Operations

This Web service allows you to create, update, delete, and query records in the ContactBestTime object. For a list of operations, see [Table 447](#).

Table 447. LSSGOP_ContactBestTime Operations

Name	Description
ContactBestTimeInsert	Creates a contactbesttime record.
ContactBestTimeUpdate	Updates an existing contactbesttime record.
ContactBestTimeDelete	Deletes a contactbesttime record.
ContactBestTimeQueryPage	Queries for a contactbesttime record.

Request Message Description: ContactBestTimeInsert

For a description of this request message, see [Table 448](#).

Table 448. Request Message Description: ContactBestTimeInsert

Node	Description	Type
ContactId	ID of the contact to be inserted.	String
ContactAddressId	ID of the contactaddress to be inserted.	String
StartDay	Start day.	String
StartTime	Start time.	String

Response Message Description: ContactBestTimeInsert

For a description of this response message, see [Table 449](#).

Table 449. Response Message Description: ContactBestTimeInsert

Node	Description	Type
Id	ID of the newly created contactbesttime record.	String

Request Message Description: ContactBestTimeUpdate

For a description of this request message, see [Table 450](#).

Table 450. Request Message Description: ContactBestTimeUpdate

Node	Description	Type
Id	ID of the contactbesttime record.	String
ContactId	Contact ID of the corresponding record.	String
ContactAddressId	Contact address ID of the corresponding record.	String
StartDay	Start day of the corresponding record.	String

Response Message Description: ContactBestTimeUpdate

For a description of this response message, see [Table 451](#).

Table 451. Response Message Description: ContactBestTimeUpdate

Node	Description	Type
Id	ID of the updated contactbesttime record.	String

Request Message Description: ContactBestTimeDelete

For a description of this request message, see [Table 452](#).

Table 452. Request Message Description: ContactBestTimeDelete

Node	Description	Type
Id	ID of the contactbesttime record to be deleted.	String

Response Message Description: ContactBestTimeDelete

For a description of this response message, see [Table 453](#).

Table 453. Response Message Description: ContactBestTimeDelete

Node	Description	Type
Id	ID of the deleted contactbesttime record.	String

Request Message Description: ContactBestTimeQueryPage

For a description of this request message, see [Table 454](#).

Table 454. Request Message Description: ContactBestTimeQueryPage

Node	Description	Type
Id	ID of the contactbesttime record to be queried.	String

Response Message Description: ContactBestTimeQueryPage

For a description of this response message, see [Table 455](#).

Table 455. Response Message Description: ContactBestTimeQueryPage

Node	Description	Type
Id	ID of the contactbesttime record.	String

LSSGOP_ContactBestTime Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 456](#).

Table 456. LSSGOP_ContactBestTime Service Object

Name	Boundary Object Type	Class
LSSGOP_ContactBestTime	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 457](#).

Table 457. LSSGOP_ContactBestTime Data Object

Siebel Repository Name	External Name
LS SGOP_ContactBestTime	LS SGOP_ContactBestTime

Interface Description (WSDL) for LSSGOP_ContactBestTime

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_ContactBestTime\http_siebel.com_asl_LSSGOP_ContactBestTime.WSDL

LSSGOP_ContactLicense

Use this Web service to create, update, delete, and query records in the ContactLicense object.

LSSGOP_ContactLicense Operations

This Web service allows you to create, update, delete, and query records in the ContactLicense object. For a list of operations, see [Table 458](#).

Table 458. LSSGOP_ContactLicense Operations

Name	Description
ContactLicenseInsert	Creates a contactlicense record.
ContactLicenseUpdate	Updates an existing contactlicense record.
ContactLicenseDelete	Deletes a contactlicense record.
ContactLicenseQueryPage	Queries for a contactlicense record.

Request Message Description: ContactLicenseInsert

For a description of this request message, see [Table 459](#).

Table 459. Request Message Description: ContactLicenseInsert

Node	Description	Type
ProfessionalId	ID of the contact.	String
State	State of the contact.	String
LicenseExpiryDate	Expiration date of the license.	String
LicenseNumber	License number.	String

Response Message Description: ContactLicenseInsert

For a description of this response message, see [Table 460](#).

Table 460. Response Message Description: ContactLicenseInsert

Node	Description	Type
Id	ID of the newly created account record.	String

Request Message Description: ContactLicenseUpdate

For a description of this request message, see [Table 461](#).

Table 461. Request Message Description: ContactLicenseUpdate

Node	Description	Type
Id	ID of the contactlicense record.	String
ProfessionalId	Professional ID of the corresponding record.	String
State	State of the corresponding record.	String

Response Message Description: ContactLicenseUpdate

For a description of this response message, see [Table 462](#).

Table 462. Response Message Description: ContactLicenseUpdate

Node	Description	Type
Id	ID of the updated contactlicense	String

Request Message Description: ContactLicenseDelete

For a description of this request message, see [Table 463](#).

Table 463. Request Message Description: ContactLicenseDelete

Node	Description	Type
Id	ID of the contactlicense record to be deleted.	String

Response Message Description: ContactLicenseDelete

For a description of this response message, see [Table 464](#).

Table 464. Response Message Description: ContactLicenseDelete

Node	Description	Type
Id	ID of the deleted contactlicense record.	String

Request Message Description: ContactLicenseQueryPage

For a description of this request message, see [Table 465](#).

Table 465. Request Message Description: ContactLicenseQueryPage

Node	Description	Type
Id	ID of the contactlicense record to be queried.	String

Response Message Description: ContactLicenseQueryPage

For a description of this response message, see [Table 466](#).

Table 466. Response Message Description: ContactLicenseQueryPage

Node	Description	Type
Id	ID of the contactlicense record.	String

LSSGOP_ContactLicense Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 467](#).

Table 467. LSSGOP_ContactLicense Service Object

Name	Boundary Object Type	Class
LSSGOP_ContactLicense	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 468](#).

Table 468. LSSGOP_ContactLicense Data Object

Siebel Repository Name	External Name
LS SGOP_ContactLicense	LS SGOP_ContactLicense

Interface Description (WSDL) for LSSGOP_ContactLicense

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_ContactLicense\http_siebel.com_asl_LSSGOP_ContactLicense.WSDL

LSSGOP_CurrentUser

Use this Web service to query records in the Current user object.

LSSGOP_CurrentUser Operations

This Web service allows you to query the CurrentUser object. For a list of operations, see [Table 469](#).

Table 469. LSSGOP_CurrentUser Operations

Name	Description
CurrentUserQueryPage	Queries for the currentuser record.

Request Message Description: CurrentUserQueryPage

For a description of this request message, see [Table 470](#).

Table 470. Request Message Description: CurrentUserQueryPage

Node	Description	Type
Id	ID of the current user to be queried.	String

Response Message Description: CurrentUserQueryPage

For a description of this response message, see [Table 471](#).

Table 471. Response Message Description: CurrentUserQueryPage

Node	Description	Type
Id	ID the current user.	String

LSSGOP_CurrentUser Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 472](#).

Table 472. LSSGOP_CurrentUser Service Object

Name	Boundary Object Type	Class
LSSGOP_CurrentUser	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 473](#).

Table 473. LSSGOP_CurrentUser Data Object

Siebel Repository Name	External Name
LS SGOP_CurrentUser	LS SGOP_CurrentUser

Interface Description (WSDL) for LSSGOP_CurrentUser

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_CurrentUser\http_siebel.com_as1_LSSGOP_CurrentUser.WSDL

LSSGOP_LanguageLOV

Use this Web service to query for records in the LanguageLOV object.

LSSGOP_LanguageLOV Operations

Use this Web service to query for records in the LanguageLOV object. For a list of operations, see [Table 474](#).

Table 474. LSSGOP_LanguageLOV Operations

Name	Description
LanguageLOVQueryPage	Queries for the list of values.

Request Message Description: LanguageLOVQueryPage

For a description of this request message, see [Table 475](#).

Table 475. Request Message Description: LanguageLOVQueryPage

Node	Description	Type
Id	ID of the LOV queried.	String

Response Message Description: LanguageLOVQueryPage

For a description of this response message, see [Table 476](#).

Table 476. Response Message Description: LanguageLOVQueryPage

Node	Description	Type
Id	ID of the LOV.	String

LSSGOP_LanguageLOV Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 477](#).

Table 477. LSSGOP_LanguageLOV Service Object

Name	Boundary Object Type	Class
LSSGOP_LanguageLOV	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 478](#).

Table 478. LSSGOP_LanguageLOV Data Object

Siebel Repository Name	External Name
LS SGOP_LanguageLOV	LS SGOP_LanguageLOV

Interface Description (WSDL) for LSSGOP_LanguageLOV

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_LanguageLOV\http_siebel.com_asl_LSSGOP_LanguageLOV.WSDL

LSSGOP_Literature

Use this Web service to create, update, delete, and query records in the Literature object.

LSSGOP_Literature Operations

This Web service allows you to create, update, delete and query records in the Literature object using Sales Rep visibility. For a list of operations, see [Table 479](#).

Table 479. LSSGOP_Literature Operations

Name	Description
LiteratureInsert	Creates a literature.
LiteratureUpdate	Update an existing literature.

Table 479. LSSGOP_Literature Operations

Name	Description
LiteratureDelete	Delete a literature.
LiteratureQueryPage	Query for a literature.

Request Message Description: LiteratureInsert

For a description of this request message, see [Table 480](#).

Table 480. Request Message Description: LiteratureInsert

Node	Description	Type
Name	Name of the literature record.	String
FileName	The file name of the literature record.	String
RelationshipType	Relationship type for the literature record.	String

Response Message Description: LiteratureInsert

For a description of this response message, see [Table 481](#).

Table 481. Response Message Description: LiteratureInsert

Node	Description	Type
Id	ID of the newly created literature record.	String

Request Message Description: LiteratureUpdate

For a description of this request message, see [Table 482](#).

Table 482. Request Message Description: LiteratureUpdate

Node	Description	Type
Id	ID of the literature record.	String
Name	Name of the corresponding record.	String
FileName	File name of the corresponding record.	String
RelationshipType	Relationship type of the corresponding record.	String

Response Message Description: LiteratureUpdate

For a description of this response message, see [Table 483](#).

Table 483. Response Message Description: LiteratureUpdate

Node	Description	Type
Id	ID of the updated literature record.	String

Request Message Description: LiteratureDelete

For a description of this request message, see [Table 484](#).

Table 484. Request Message Description: LiteratureDelete

Node	Description	Type
Id	ID of the literature record to be deleted.	String

Response Message Description: LiteratureDelete

For a description of this response message, see [Table 485](#).

Table 485. Response Message Description: LiteratureDelete

Node	Description	Type
Id	ID of the deleted literature record.	String

Request Message Description: LiteratureQueryPage

For a description of this request message, see [Table 486](#).

Table 486. Request Message Description: LiteratureQueryPage

Node	Description	Type
Id	ID of the literature record to be queried.	String

Response Message Description: LiteratureQueryPage

For a description of this response message, see [Table 487](#).

Table 487. Response Message Description: LiteratureQueryPage

Node	Description	Type
Id	ID of the literature record.	String

LSSGOP_Literature Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 488](#).

Table 488. LSSGOP_Literature Service Object

Name	Boundary Object Type	Class
LSSGOP_Literature	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 489](#).

Table 489. LSSGOP_Literature Data Object

Siebel Repository Name	External Name
LS SGOP_Literature	LS SGOP_Literature

Interface Description (WSDL) for LSSGOP_Literature

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

...\LSSGOP_Literature\http_siebel.com_asi_LSSGOP_Literature.WSDL

LSSGOP_Literature_ALL

Use this Web service to create, update, delete, and query records in the Literature_ALL object.

LSSGOP_Literature_ALL Operations

This Web service allows you to create, update, delete, and query records in the Literature_ALL object using Administrator visibility. For a list of operations, see [Table 490](#).

Table 490. LSSGOP_Literature_ALL Operations

Name	Description
Literature_ALLInsert	Creates a literature.
Literature_ALLUpdate	Update an existing literature.

Table 490. LSSGOP_Literature_ALL Operations

Name	Description
Literature_ALLDelete	Delete a literature.
Literature_ALLQueryPage	Query for a literature.

Request Message Description: Literature_ALLInsert

For a description of this request message, see [Table 491](#).

Table 491. Request Message Description: Literature_ALLInsert

Node	Description	Type
Name	Name of the literature record to be inserted.	String
FileName	File name of the literature record.	String
RelationshipType	Relationship type.	String

Response Message Description: Literature_ALLInsert

For a description of this response message, see [Table 492](#).

Table 492. Response Message Description: Literature_ALLInsert

Node	Description	Type
Id	ID of the newly created Literature All record.	String

Request Message Description: Literature_ALLUpdate

For a description of this request message, see [Table 493](#).

Table 493. Request Message Description: Literature_ALLUpdate

Node	Description	Type
Id	ID of the literature record.	String
Name	Name of the corresponding record.	String
FileName	File name of the corresponding record.	String
RelationshipType	Relationship type of the corresponding record.	String

Response Message Description: Literature_ALLUpdate

For a description of this response message, see [Table 494](#).

Table 494. Response Message Description: Literature_ALLUpdate

Node	Description	Type
Id	ID of the updated literature record.	String

Request Message Description: Literature_ALLDelete

For a description of this request message, see [Table 495](#).

Table 495. Request Message Description: Literature_ALLDelete

Node	Description	Type
Id	ID of the literature record to be deleted.	String

Response Message Description: Literature_ALLDelete

For a description of this response message, see [Table 496](#).

Table 496. Response Message Description: Literature_ALLDelete

Node	Description	Type
Id	ID of the deleted literature record.	String

Request Message Description: Literature_ALLQueryPage

For a description of this request message, see [Table 497](#).

Table 497. Response Message Description: Literature_ALLDelete

Node	Description	Type
Id	ID of the literature record to be queried.	String

Response Message Description: Literature_ALLDelete

For a description of this response message, see [Table 498](#).

Table 498. Response Message Description: Literature_ALLDelete

Node	Description	Type
Id	ID of the literature record.	String

LSSGOP_Literature_ALL Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 499](#).

Table 499. LSSGOP_Literature_ALL Service Object

Name	Boundary Object Type	Class
LSSGOP_Literature_ALL	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 500](#).

Table 500. LSSGOP_Literature_ALL Data Object

Siebel Repository Name	External Name
LS SGOP_Literature_ALL	LS SGOP_Literature_ALL

Interface Description (WSDL) for LSSGOP_Literature_ALL

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

...\LSSGOP_Literature_ALL\http_siebel.com_asl_LSSGOP_Literature_ALL.WSDL

LSSGOP_LiteratureCatalog

Use this Web service to create, update, delete, and query records in the LiteratureCatalog object.

LSSGOP_LiteratureCatalog Operations

This Web service allows you to create, update, delete, and query records in the Literature Catalog object. For a list of operations, see [Table 501](#).

Table 501. LSSGOP_LiteratureCatalog Operations

Name	Description
LiteratureCatalogInsert	Creates a literaturecatalog record.
LiteratureCatalogUpdate	Updates an existing literaturecatalog record.

Table 501. LSSGOP_LiteratureCatalog Operations

Name	Description
LiteratureCatalogDelete	Deletes a literaturecatalog record.
LiteratureCatalogQueryPage	Queries for a literaturecatalog record.

Request Message Description: LiteratureCatalogInsert

For a description of this request message, see [Table 502](#).

Table 502. Request Message Description: LiteratureCatalogInsert

Node	Description	Type
CtlgCatId	ID of the catalog category to which the literature is to be associated.	String
LitId	ID of the literature record.	String
LitName	Name of the literature record.	String

Response Message Description: LiteratureCatalogInsert

For a description of this response message, see [Table 503](#).

Table 503. Response Message Description: LiteratureCatalogInsert

Node	Description	Type
Id	ID of the newly created literaturecatalog record.	String

Request Message Description: LiteratureCatalogUpdate

For a description of this request message, see [Table 504](#).

Table 504. Request Message Description: LiteratureCatalogUpdate

Node	Description	Type
Id	ID of the literaturecatalog record.	String
CtlgCatId	CtlgCatId of the corresponding record.	String
LitId	Literature ID of the corresponding record.	String
LitName	Literature Name of the corresponding record.	String

Response Message Description: LiteratureCatalogUpdate

For a description of this response message, see [Table 505](#).

Table 505. Response Message Description: LiteratureCatalogUpdate

Node	Description	Type
Id	ID of the updated literaturecatalog record.	String

Request Message Description: LiteratureCatalogDelete

For a description of this request message, see [Table 506](#).

Table 506. Request Message Description: LiteratureCatalogDelete

Node	Description	Type
Id	ID of the literaturecatalog record to be deleted.	String

Response Message Description: LiteratureCatalogDelete

For a description of this response message, see [Table 507](#).

Table 507. Response Message Description: LiteratureCatalogDelete

Node	Description	Type
Id	ID of the deleted literaturecatalog record.	String

Request Message Description: LiteratureCatalogQueryPage

For a description of this request message, see [Table 508](#).

Table 508. Request Message Description: LiteratureCatalogQueryPage

Node	Description	Type
Id	ID of the literaturecatalog record to be queried.	String

Response Message Description: LiteratureCatalogQueryPage

For a description of this response message, see [Table 509](#).

Table 509. Response Message Description: LiteratureCatalogQueryPage

Node	Description	Type
Id	ID of the literaturecatalog record.	String

LSSGOP_LiteratureCatalog Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 510](#).

Table 510. LSSGOP_LiteratureCatalog Service Object

Name	Boundary Object Type	Class
LSSGOP_LiteratureCatalog	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 511](#).

Table 511. LSSGOP_LiteratureCatalog Data Object

Siebel Repository Name	External Name
LS SGOP_LiteratureCatalog	LS SGOP_LiteratureCatalog

Interface Description (WSDL) for LSSGOP_LiteratureCatalog

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_LiteratureCatalog\http_siebel.com_as1_LSSGOP_LiteratureCatalog.WSDL

LSSGOP_MessagePlan

Use this Web service to create, update, delete, and query records in the MessagePlan object.

LSSGOP_MessagePlan Operations

This Web service allows you to create, update, delete and query records in the MessagePlan object using Sales Rep visibility. For a list of operations, see [Table 512](#).

Table 512. LSSGOP_MessagePlan Operations

Name	Description
MessagePlanInsert	Creates a messageplan record.
MessagePlanUpdate	Updates an existing messageplan record.

Table 512. LSSGOP_MessagePlan Operations

Name	Description
MessagePlanDelete	Deletes a messageplan record.
MessagePlanQueryPage	Queries for the messageplan record.

Request Message Description: MessagePlanInsert

For a description of this request message, see [Table 513](#).

Table 513. Request Message Description: MessagePlanInsert

Node	Description	Type
Name	Name of the corresponding record.	String
MessagePlanType	Message plan type of the corresponding record.	String
Owner	Owner of the corresponding record.	String
Position	Position of the corresponding record.	String
Product	Product of the corresponding record.	String
Status	Status of the corresponding record.	String
Version	Version of the corresponding record.	String

Response Message Description: MessagePlanInsert

For a description of this response message, see [Table 514](#).

Table 514. Response Message Description: MessagePlanInsert

Node	Description	Type
Id	ID of the newly created messageplan record.	String

Request Message Description: MessagePlanUpdate

For a description of this request message, see [Table 515](#).

Table 515. Request Message Description: MessagePlanUpdate

Node	Description	Type
Id	ID of the messageplan.	String
Name	Name of the corresponding record.	String
MessagePlanType	Message plan type of the corresponding record.	String
Owner	Owner of the corresponding record.	String
Position	Position of the corresponding record.	String
Product	Product of the corresponding record.	String
Status	Status of the corresponding record.	String
Version	Version of the corresponding record.	String

Response Message Description: MessagePlanUpdate

For a description of this response message, see [Table 516](#).

Table 516. Response Message Description: MessagePlanUpdate

Node	Description	Type
Id	Id of the updated messageplan record.	String

Request Message Description: MessagePlanDelete

For a description of this request message, see [Table 517](#).

Table 517. Request Message Description: MessagePlanDelete

Node	Description	Type
Id	ID of the messageplan record to be deleted.	String

Response Message Description: MessagePlanDelete

For a description of this response message, see [Table 518](#).

Table 518. Response Message Description: MessagePlanDelete

Node	Description	Type
Id	ID of the deleted messageplan record.	String

Request Message Description: MessagePlanQueryPage

For a description of this request message, see [Table 519](#).

Table 519. Request Message Description: MessagePlanQueryPage

Node	Description	Type
Id	ID of the messageplan to be queried	String

Response Message Description: MessagePlanQueryPage

For a description of this response message, see [Table 520](#).

Table 520. Response Message Description: MessagePlanQueryPage

Node	Description	Type
Id	ID of the messageplan	String

LSSGOP_MessagePlan Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 521](#).

Table 521. LSSGOP_MessagePlan Service Object

Name	Boundary Object Type	Class
LSSGOP_MessagePlan	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 522](#).

Table 522. LSSGOP_MessagePlan Data Object

Siebel Repository Name	External Name
LS_SGOP_MessagePlan	LS_SGOP_MessagePlan

Interface Description (WSDL) for LSSGOP_MessagePlan

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_MessagePlan\http_siebel.com_as1_LSSGOP_MessagePlan.WSDL

LSSGOP_MessagePlan_ALL

Use this Web service to create, update, delete, and query records in the MessagePlan_ALL object.

LSSGOP_MessagePlan_ALL Operations

This Web service allows you to create, update, delete, and query records in the MessagePlan_ALL object using Administrator visibility. For a list of operations, see [Table 523](#).

Table 523. LSSGOP_MessagePlan_ALL Operations

Name	Description
MessagePlan_ALLInsert	Creates a messageplan record.
MessagePlan_ALLUpdate	Updates an existing messageplan record.
MessagePlan_ALLDelete	Deletes a messageplan record.
MessagePlan_ALLQueryPage	Queries for a messageplan record.

Request Message Description: MessagePlan_ALLInsert

For a description of this request message, see [Table 524](#).

Table 524. Request Message Description: MessagePlan_ALLInsert

Node	Description	Type
Name	Name the message plan to be inserted.	String
MessagePlanType	Type of message plan.	String
Owner	The message plan owner.	String

Table 524. Request Message Description: MessagePlan_ALLInsert

Node	Description	Type
Position	The position of the message plan owner.	String
Product	The message plan product.	String
Status	Status of the message plan.	String
Version	The version of the message plan.	String

Response Message Description: MessagePlan_ALLInsert

For a description of this response message, see [Table 525](#).

Table 525. Response Message Description: MessagePlan_ALLInsert

Node	Description	Type
Id	ID of an newly created account.	String

Request Message Description: MessagePlan_ALLUpdate and MessagePlanUpdate

For a description of this request message, see [Table 526](#).

Table 526. Request Message Description: MessagePlan_ALLUpdate and MessagePlanUpdate

Node	Description	Type
Id	ID of the messageplan record.	String
Name	Name of the corresponding record.	String
MessagePlanType	MessagePlanType of the corresponding record.	String
Owner	Owner of the corresponding record.	String
Position	Position of the corresponding record.	String
Product	Product of the corresponding record.	String
Status	Status of the corresponding record.	String
Version	Version of the corresponding record.	String

Response Message Description: MessagePlan_ALLUpdate

For a description of this response message, see [Table 527](#).

Table 527. Response Message Description: MessagePlan_ALLUpdate

Node	Description	Type
Id	ID of an updated messageplan record.	String

Request Message Description: MessagePlan_ALLDelete

For a description of this request message, see [Table 528](#).

Table 528. Request Message Description: MessagePlan_ALLDelete

Node	Description	Type
Id	ID of the messageplan record to be deleted.	String

Response Message Description: MessagePlan_ALLDelete

For a description of this response message, see [Table 529](#).

Table 529. Response Message Description: MessagePlan_ALLDelete

Node	Description	Type
Id	ID of the deleted messageplan record.	String

Request Message Description: MessagePlan_ALLQueryPage

For a description of this request message, see [Table 530](#).

Table 530. Request Message Description: MessagePlan_ALLQueryPage

Node	Description	Type
Id	ID of the messageplan record to be queried.	String

Response Message Description: MessagePlan_ALLQueryPage

For a description of this response message, see [Table 531](#).

Table 531. Response Message Description: MessagePlan_ALLQueryPage

Node	Description	Type
Id	ID of the messageplan record.	String

LSSGOP_MessagePlan_ALL Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 532](#).

Table 532. LSSGOP_MessagePlan_ALL Service Object

Name	Boundary Object Type	Class
LSSGOP_MessagePlan_ALL	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 533](#).

Table 533. LSSGOP_MessagePlan_ALL Data Object

Siebel Repository Name	External Name
LS_SGOP_MessagePlan_ALL	LS_SGOP_MessagePlan_ALL

Interface Description (WSDL) for LSSGOP_MessagePlan_ALL

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_MessagePlan_ALL\http_siebel.com_as1_LSSGOP_MessagePlan_ALL.WSDL

LSSGOP_MessagePlanCatalog

Use this Web service to create, update, delete, and query records in the MessagePlanCatalog object.

LSSGOP_MessagePlanCatalog Operations

This Web service features four operations which allow you to create, update, delete, and query records in the MessagePlan Catalog object. For a list of operations, see [Table 534](#).

Table 534. LSSGOP_MessagePlanCatalog Operations

Name	Description
MessagePlanCatalogInsert	Creates a messageplancatalog record.
MessagePlanCatalogUpdate	Updates an existing messageplancatalog record.

Table 534. LSSGOP_MessagePlanCatalog Operations

Name	Description
MessagePlanCatalogDelete	Deletes a messageplancatalog record.
MessagePlanCatalogQueryPage	Queries for a messageplancatalog record.

Request Message Description: MessagePlanCatalogInsert

For a description of this request message, see [Table 535](#).

Table 535. Request Message Description: MessagePlanCatalogInsert

Node	Description	Type
CtlgCatId	ID of the catalog category to be associated with the message plan.	String
MsgPlanId	ID of the message plan.	String

Response Message Description: MessagePlanCatalogInsert

For a description of this response message, see [Table 536](#).

Table 536. Response Message Description: MessagePlanCatalogInsert

Node	Description	Type
Id	ID of the newly created messageplancatalog record.	String

Request Message Description: MessagePlanCatalogUpdate

For a description of this request message, see [Table 537](#).

Table 537. Request Message Description: MessagePlanCatalogUpdate

Node	Description	Type
Id	ID of the messageplancatalog record.	String
CtlgCatId	CtlgCatId of the corresponding record.	String
MsgPlanId	Message plan ID of the corresponding record.	String

Response Message Description: MessagePlanCatalogUpdate

For a description of this response message, see [Table 538](#).

Table 538. Response Message Description: MessagePlanCatalogUpdate

Node	Description	Type
Id	ID of an updated messageplancatalog record.	String

Request Message Description: MessagePlanCatalogDelete

For a description of this request message, see [Table 539](#).

Table 539. Request Message Description: MessagePlanCatalogDelete

Node	Description	Type
Id	ID of the messageplancatalog record to be deleted.	String

Response Message Description: MessagePlanCatalogDelete

For a description of this response message, see [Table 540](#).

Table 540. Response Message Description: MessagePlanCatalogDelete

Node	Description	Type
Id	ID of the deleted messageplancatalog record.	String

Request Message Description: MessagePlanCatalogQueryPage

For a description of this request message, see [Table 541](#).

Table 541. Request Message Description: MessagePlanCatalogQueryPage

Node	Description	Type
Id	ID of the messageplancatalog record to be queried.	String

Response Message Description: MessagePlanCatalogQueryPage

For a description of this response message, see [Table 542](#).

Table 542. Response Message Description: MessagePlanCatalogQueryPage

Node	Description	Type
Id	ID of the messageplancatalog record.	String

LSSGOP_MessagePlanCatalog Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 543](#).

Table 543. LSSGOP_MessagePlanCatalog Service Object

Name	Boundary Object Type	Class
LSSGOP_MessagePlanCatalog	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 544](#).

Table 544. LSSGOP_MessagePlanCatalog Data Object

Siebel Repository Name	External Name
LS_SGOP_MessagePlanCatalog	LS_SGOP_MessagePlanCatalog

Interface Description (WSDL) for LSSGOP_MessagePlanCatalog

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_MessagePlanCatalog\http_siebel.com_as_i_LSSGOP_MessagePlanCatalog.WSDL

LSSGOP_MessageResponse

Use this Web service to create, update, delete, and query records in the MessageResponse object.

LSSGOP_MessageResponse Operations

This Web service allows you to create, update, delete, and query records in the MessageResponse object. For a list of operations, see [Table 545](#).

Table 545. LSSGOP_MessageResponse Operations

Name	Description
MessageResponseInsert	Creates a messageresponse record.
MessageResponseUpdate	Updates an existing messageresponse record.

Table 545. LSSGOP_MessageResponse Operations

Name	Description
MessageResponseDelete	Deletes a messageresponse record.
MessageResponseQueryPage	Queries for a messageresponse record.

Request Message Description: MessageResponseInsert

For a description of this request message, see [Table 546](#).

Table 546. Request Message Description: MessageResponseInsert

Node	Description	Type
MessagePlan	Name of the message plan.	String
MessagePlanId	ID of the message plan.	String
MessageStartTime	Start time of the message plan.	String
MessageEndTime	End time of the message plan.	String
Response	Response of the corresponding record.	String

Response Message Description: MessageResponseInsert

For a description of this response message, see [Table 547](#).

Table 547. Response Message Description: MessageResponseInsert

Node	Description	Type
Id	ID of the newly created messageresponse record.	String

Request Message Description: MessageResponseUpdate

For a description of this request message, see [Table 548](#).

Table 548. Request Message Description: MessageResponseUpdate

Node	Description	Type
Id	ID of the messageresponse record.	String
MessagePlan	Message plan of the corresponding record.	String
MessagePlanId	Message plan ID of the corresponding record.	String
MessageStartTime	Message start time of the corresponding record.	String

Table 548. Request Message Description: MessageResponseUpdate

Node	Description	Type
MessageEndTime	Message end time of the corresponding record.	String
Response	Response of the corresponding record.	String

Response Message Description: MessageResponseUpdate

For a description of this response message, see [Table 549](#).

Table 549. Response Message Description: MessageResponseUpdate

Node	Description	Type
Id	ID of the updated messengeresponse record.	String

Request Message Description: MessageResponseDelete

For a description of this request message, see [Table 550](#).

Table 550. Request Message Description: MessageResponseDelete

Node	Description	Type
Id	ID of the messengeresponse record to be deleted.	String

Response Message Description: MessageResponseDelete

For a description of this response message, see [Table 551](#).

Table 551. Response Message Description: MessageResponseDelete

Node	Description	Type
Id	ID of the deleted messengeresponse record.	String

Request Message Description: MessageResponseQueryPage

For a description of this request message, see [Table 552](#).

Table 552. Request Message Description: MessageResponseQueryPage

Node	Description	Type
Id	ID of the messengeresponse record to be queried.	String

Response Message Description: MessageResponseQueryPage

For a description of this response message, see [Table 553](#).

Table 553. Response Message Description: MessageResponseQueryPage

Node	Description	Type
Id	ID of the messengeresponse record.	String

LSSGOP_MessageResponse Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 554](#).

Table 554. LSSGOP_MessageResponse Service Object

Name	Boundary Object Type	Class
LSSGOP_ MessageResponse	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 555](#).

Table 555. LSSGOP_MessageResponse Data Object

Siebel Repository Name	External Name
LS SGOP_MessageResponse	LS SGOP_MessageResponse

Interface Description (WSDL) for LSSGOP_MessageResponse

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_MessageResponse\http_siebel.com_as1_LSSGOP_MessageResponse.WSDL

LSSGOP_ MsgPlanItem

Use this Web service to create, update, delete, and query records in the MsgPlanItem object.

LSSGOP_ MsgPlanItem Operations

This Web service allows you to create, update, delete, and query records in the MsgPlanItem object using Sales Rep visibility. For a list of operations, see [Table 556](#).

Table 556. LSSGOP_ MsgPlanItem Operations

Name	Description
MsgPlanItemInsert	Creates a msgplanitem record.
MsgPlanItemUpdate	Updates an existing msgplanitem record.
MsgPlanItemDelete	Deletes a msgplanitem record.
MsgPlanItemQueryPage	Queries for a msgplanitem record.

Request Message Description: MsgPlanItemInsert

For a description of this request message, see [Table 557](#).

Table 557. Request Message Description: MsgPlanItemInsert

Node	Description	Type
Name	Name of the message plan item.	String
SequenceNumber	Sequence number of the message plan.	String
Type	Type of message plan.	String
ParentMPIId	ID of the parent message plan.	String

Response Message Description: MsgPlanItemInsert

For a description of this response message, see [Table 558](#).

Table 558. Response Message Description: MsgPlanItemInsert

Node	Description	Type
Id	ID of the newly created msgplanitem record.	String

Request Message Description: MsgPlanItemUpdate

For a description of this request message, see [Table 559](#).

Table 559. Request Message Description: MsgPlanItemUpdate

Node	Description	Type
Id	ID of the msgplanitem record.	String
Name	Name of the corresponding record.	String

Table 559. Request Message Description: MsgPlanItemUpdate

Node	Description	Type
SequenceNumber	Sequence number of the corresponding record.	String
Type	Type of the corresponding record.	String
ParentMPIId	Parent message plan ID of the corresponding record.	String

Response Message Description: MsgPlanItemUpdate

For a description of this response message, see [Table 560](#).

Table 560. Response Message Description: MsgPlanItemUpdate

Node	Description	Type
Id	ID of the updated msgplanitem record.	String

Request Message Description: MsgPlanItemDelete

For a description of this request message, see [Table 561](#).

Table 561. Request Message Description: MsgPlanItemDelete

Node	Description	Type
Id	ID of the msgplanitem record to be deleted.	String

Response Message Description: MsgPlanItemDelete

For a description of this response message, see [Table 562](#).

Table 562. Response Message Description: MsgPlanItemDelete

Node	Description	Type
Id	ID of the deleted msgplanitem record.	String

Request Message Description: MsgPlanItemQueryPage

For a description of this request message, see [Table 563](#).

Table 563. Request Message Description: MsgPlanItemQueryPage

Node	Description	Type
Id	ID of the msgplanitem record to be queried.	String

Response Message Description: MsgPlanItemQueryPage

For a description of this response message, see [Table 564](#).

Table 564. Response Message Description: MsgPlanItemQueryPage

Node	Description	Type
Id	ID of the msgplanitem record.	String

LSSGOP_MsgPlanItem Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 565](#).

Table 565. LSSGOP_MsgPlanItem Service Object

Name	Boundary Object Type	Class
LSSGOP_MsgPlanItem	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 566](#).

Table 566. LSSGOP_MsgPlanItem Data Object

Siebel Repository Name	External Name
LS SGOP_MsgPlanItem	LS SGOP_MsgPlanItem

Interface Description (WSDL) for LSSGOP_MsgPlanItem

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_MsgPlanItem\http_siebel.com_asl_LSSGOP_MsgPlanItem.WSDL

LSSGOP_MsgPlanItem_ALL

Use this Web service to create, update, delete, and query records in the MsgPlanItem_ALL object.

LSSGOP_MsgPlanItem_ALL Operations

This Web service allows you to create, update, delete, and query records in the MsgPlanItems object using Administrator visibility. For a list of operations, see [Table 567](#).

Table 567. LSSGOP_MsgPlanItem_ALL Operations

Name	Description
MsgPlanItem_ALLInsert	Creates a msgplanitem record.
MsgPlanItem_ALLUpdate	Updates an existing msgplanitem record.
MsgPlanItem_ALLDelete	Deletes a msgplanitem record.
MsgPlanItem_ALLQueryPage	Queries for a msgplanitem record.

Request Message Description: MsgPlanItem_ALLInsert

For a description of this request message, see [Table 568](#).

Table 568. Request Message Description: MsgPlanItem_ALLInsert

Node	Description	Type
Name	Name of the message plan item.	String
SequenceNumber	Sequence number of the message plan item.	String
Type	Message plan item type.	String
ParentMPIId	ID of the parent message plan.	String

Response Message Description: MsgPlanItem_ALLInsert

For a description of this response message, see [Table 569](#).

Table 569. Response Message Description: MsgPlanItem_ALLInsert

Node	Description	Type
Id	ID of the newly created msgplanitem	String

Request Message Description: MsgPlanItem_ALLUpdate

For a description of this request message, see [Table 570](#).

Table 570. Request Message Description: MsgPlanItem_ALLUpdate

Node	Description	Type
Id	ID of the msgplanitem record.	String
Name	Name.	String

Table 570. Request Message Description: MsgPlanItem_ALLUpdate

Node	Description	Type
SequenceNumber	Sequence number of the corresponding record.	Number
Type	Type of the corresponding record.	String
ParentMPID	ParentMP ID of the corresponding record.	String

Response Message Description: MsgPlanItem_ALLUpdate

For a description of this response message, see [Table 571](#).

Table 571. Response Message Description: MsgPlanItem_ALLUpdate

Node	Description	Type
Id	ID of the updated msgplanitem record.	String

Request Message Description: MsgPlanItem_ALLDelete

For a description of this request message, see [Table 572](#).

Table 572. Request Message Description: MsgPlanItem_ALLDelete

Node	Description	Type
Id	ID of the msgplanitem record to be deleted.	String

Response Message Description: MsgPlanItem_ALLDelete

For a description of this response message, see [Table 573](#).

Table 573. Response Message Description: MsgPlanItem_ALLDelete

Node	Description	Type
Id	ID of the deleted msgplanitem record.	String

Request Message Description: MsgPlanItem_ALLQueryPage

For a description of this request message, see [Table 574](#).

Table 574. Request Message Description: MsgPlanItem_ALLQueryPage

Node	Description	Type
Id	ID of the msgplanitem record to be queried.	String

Response Message Description: MsgPlanItem_ALLQueryPage

For a description of this response message, see [Table 575](#).

Table 575. Response Message Description: MsgPlanItem_ALLQueryPage

Node	Description	Type
Id	ID of the msgplanitem record.	String

LSSGOP_MsgPlanItem_ALL Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 576](#).

Table 576. LSSGOP_MsgPlanItem_ALL Service Object

Name	Boundary Object Type	Class
LSSGOP_MsgPlanItem_ALL	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 577](#).

Table 577. LSSGOP_MsgPlanItem_ALL Service Object

Siebel Repository Name	External Name
LS SGOP_Account	LS SGOP_Account

Interface Description (WSDL) for LSSGOP_MsgPlanItem_ALL

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_MsgPlanItem_ALL\http_siebel.com_asl_LSSGOP_MsgPlanItem_ALL.WSDL

LSSGOP_MsgPlanItemRelation

Use this Web service to create, update, delete, and query records in the MsgPlanItemRelation object.

LSSGOP_MsgPlanItemRelation Operations

This Web service allows you to create, update, delete, and query records in the MsgPlanItemRelation object using Sales Rep visibility. For a list of operations, see [Table 578](#).

Table 578. LSSGOP_MsgPlanItemRelation Operations

Name	Description
MsgPlanItemRelationInsert	Creates a msgplanitemrelation record.
MsgPlanItemRelationUpdate	Updates an existing msgplanitemrelation record.
MsgPlanItemRelationDelete	Deletes a msgplanitemrelation record.
MsgPlanItemRelationQueryPage	Queries for a msgplanitemrelation record.

Request Message Description: MsgPlanItemRelationInsert

For a description of this request message, see [Table 579](#).

Table 579. Request Message Description: MsgPlanItemRelationInsert

Node	Description	Type
SequenceNumber	Sequence number of the msgplanitemrelation record.	String

Response Message Description: MsgPlanItemRelationInsert

For a description of this response message, see [Table 580](#).

Table 580. Response Message Description: MsgPlanItemRelationInsert

Node	Description	Type
Id	Id of the newly created msgplanitemrelation record.	String

Request Message Description: MsgPlanItemRelationUpdate

For a description of this request message, see [Table 581](#).

Table 581. Request Message Description: MsgPlanItemRelationUpdate

Node	Description	Type
Id	ID of the msgplanitemrelation record.	String
SequenceNumber	Sequence number of the corresponding record.	String

Response Message Description: MsgPlanItemRelationUpdate

For a description of this response message, see [Table 582](#).

Table 582. Response Message Description: MsgPlanItemRelationUpdate

Node	Description	Type
Id	ID of the updated msgplanitemrelation record.	String

Request Message Description: MsgPlanItemRelationDelete

For a description of this request message, see [Table 583](#).

Table 583. Request Message Description: MsgPlanItemRelationDelete

Node	Description	Type
Id	ID of the msgplanitemrelation record to be deleted.	String

Response Message Description: MsgPlanItemRelationDelete

For a description of this response message, see [Table 584](#).

Table 584. Response Message Description: MsgPlanItemRelationDelete

Node	Description	Type
Id	ID of the deleted msgplanitemrelation record.	String

Request Message Description: MsgPlanItemRelationQueryPage

For a description of this request message, see [Table 585](#).

Table 585. Request Message Description: MsgPlanItemRelationQueryPage

Node	Description	Type
Id	ID of the msgplanitemrelation record to be queried.	String

Response Message Description: MsgPlanItemRelationQueryPage

For a description of this response message, see [Table 586](#).

Table 586. Response Message Description: MsgPlanItemRelationQueryPage

Node	Description	Type
Id	ID of the msgplanitemrelation record.	String

LSSGOP_MsgPlanItemRelation Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 587](#).

Table 587. LSSGOP_MsgPlanItemRelation Service Object

Name	Boundary Object Type	Class
LSSGOP_MsgPlanItemRelation	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 588](#).

Table 588. LSSGOP_MsgPlanItemRelation Service Object

Siebel Repository Name	External Name
LS SGOP_MsgPlanItemRelation	LS SGOP_MsgPlanItemRelation

Interface Description (WSDL) for LSSGOP_MsgPlanItemRelation

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_MsgPlanItemRelation\http_siebel.com_asl_LSSGOP_MsgPlanItemRelation.WSDL

LSSGOP_MsgPlanItemRelation_ALL

Use this Web service to create, update, delete, and query records in the MsgPlanItemRelation_ALL objects.

LSSGOP_MsgPlanItemRelation_ALL Operations

This Web service allows you to create, update, delete, and query records in the MsgPlanItemRelation object using Administrator visibility. For a list of operations, see [Table 589](#).

Table 589. LSSGOP_MsgPlanItemRelation_ALL Operations

Name	Description
MsgPlanItemRelation_ALLInsert	Creates a msgplanitemrelation record.
MsgPlanItemRelation_ALLUpdate	Updates an existing msgplanitemrelation record.

Table 589. LSSGOP_MsgPlanItemRelation_ALL Operations

Name	Description
MsgPlanItemRelation_ALLDelete	Deletes a msgplanitemrelation record.
MsgPlanItemRelation_ALLQueryPage	Queries for a msgplanitemrelation record.

Request Message Description: MsgPlanItemRelation_ALLInsert

For a description of this request message, see [Table 590](#).

Table 590. Request Message Description: MsgPlanItemRelation_ALLInsert

Node	Description	Type
SequenceNumber	Sequence number.	String

Response Message Description: MsgPlanItemRelation_ALLInsert

For a description of this response message, see [Table 591](#).

Table 591. Response Message Description: MsgPlanItemRelation_ALLInsert

Node	Description	Type
Id	ID of an newly created account record.	String

Request Message Description: MsgPlanItemRelation_ALLUpdate

For a description of this request message, see [Table 592](#).

Table 592. Request Message Description: MsgPlanItemRelation_ALLUpdate

Node	Description	Type
Id	ID of the msgplanitemrelation record.	String
SequenceNumber	Sequence number of the corresponding record.	String

Response Message Description: MsgPlanItemRelation_ALLUpdate

For a description of this response message, see [Table 593](#).

Table 593. Response Message Description: MsgPlanItemRelation_ALLUpdate

Node	Description	Type
Id	ID of the updated msgplanitemrelation record.	String

Request Message Description: MsgPlanItemRelation_ALLDelete

For a description of this request message, see [Table 594](#).

Table 594. Request Message Description: MsgPlanItemRelation_ALLDelete

Node	Description	Type
Id	ID of the msgplanitemrelation record to be deleted.	String

Response Message Description: MsgPlanItemRelation_ALLDelete

For a description of this response message, see [Table 595](#).

Table 595. Response Message Description: MsgPlanItemRelation_ALLDelete

Node	Description	Type
Id	ID of the deleted msgplanitemrelation record.	String

Request Message Description: MsgPlanItemRelation_ALLQueryPage

For a description of this request message, see [Table 596](#).

Table 596. Request Message Description: MsgPlanItemRelation_ALLQueryPage

Node	Description	Type
Id	ID of the msgplanitemrelation record to be queried.	String

Response Message Description: MsgPlanItemRelation_ALLQueryPage

For a description of this response message, see [Table 597](#).

Table 597. Response Message Description: MsgPlanItemRelation_ALLQueryPage

Node	Description	Type
Id	ID of the msgplanitemrelation record.	String

LSSGOP_MsgPlanItemRelation_ALL Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 598](#).

Table 598. LSSGOP_MsgPlanItemRelation_ALL Service Object

Name	Boundary Object Type	Class
LSSGOP_MsgPlanItemRelation_ALL	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 599](#).

Table 599. LSSGOP_MsgPlanItemRelation_ALL Data Object

Siebel Repository Name	External Name
LS SGOP_MsgPlanItemRelation_ALL	LS SGOP_MsgPlanItemRelation_ALL

Interface Description (WSDL) for LSSGOP_MsgPlanItemRelation_ALL

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

...\LSSGOP_MsgPlanItemRelation_ALL\http_siebel.com_asl_LSSGOP_MsgPlanItemRelation_ALL.WSDL

LSSGOP_PersonalList

Use this Web service to create, update, delete, and query records in the PersonalList object.

LSSGOP_PersonalList Operations

This Web service allows you to create, update, delete, and query records in the PersonalList object. For a list of operation, see [Table 600](#).

Table 600. LSSGOP_PersonalList Operations

Name	Description
PersonalListInsert	Creates a personallist record.
PersonalListUpdate	Updates an existing personallist record.
PersonalListDelete	Deletes a personallist record.
PersonalListQueryPage	Queries for a personallist record.

Request Message Description: PersonalListInsert

For a description of this request message, see [Table 601](#).

Table 601. Request Message Description: PersonalListInsert

Node	Description	Type
Sample	Name of the sample to be inserted.	String

Response Message Description: PersonalListInsert

For a description of this response message, see [Table 602](#).

Table 602. Response Message Description: PersonalListInsert

Node	Description	Type
Id	Id of the newly created personallist record.	String

Request Message Description: PersonalListUpdate

For a description of this request message, see [Table 603](#).

Table 603. Request Message Description: PersonalListUpdate

Node	Description	Type
Id	Id of a personallist record.	String
Sample	Sample of the corresponding record.	String

Response Message Description: PersonalListUpdate

For a description of this response message, see [Table 604](#).

Table 604. Response Message Description: PersonalListUpdate

Node	Description	Type
Id	ID of the updated personallist record.	String

Request Message Description: PersonalListDelete

For a description of this request message, see [Table 605](#).

Table 605. Request Message Description: PersonalListDelete

Node	Description	Type
Id	ID of the personallist record to be deleted.	String

Response Message Description: PersonalListDelete

For a description of this response message, see [Table 606](#).

Table 606. Response Message Description: PersonalListDelete

Node	Description	Type
Id	ID of the deleted personallist record.	String

Request Message Description: PersonalListQueryPage

For a description of this request message, see [Table 607](#).

Table 607. Request Message Description: PersonalListQueryPage

Node	Description	Type
Id	ID of the personallist record to be queried.	String

Response Message Description: PersonalListQueryPage

For a description of this response message, see [Table 608](#).

Table 608. Response Message Description: PersonalListQueryPage

Node	Description	Type
Id	ID of a personallist record.	String

LSSGOP_PersonalList Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 609](#).

Table 609. LSSGOP_PersonalList Service Object

Name	Boundary Object Type	Class
LSSGOP_PersonalList	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 610](#).

Table 610. LSSGOP_PersonalList Data Object

Siebel Repository Name	External Name
LS SGOP_PersonalList	LS SGOP_PersonalList

Interface Description (WSDL) for LSSGOP_PersonalList

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

...\LSSGOP_PersonalList\http_siebel.com_asl_LSSGOP_PersonalList.WSDL

LSSGOP_PositionContactAddress

Use this Web service to create, update, delete, and query records in the PositionContactAddress object.

LSSGOP_PositionContactAddress Operations

This Web service allows you to create, update, delete, and query records in the PositioncontactAddress object. For a list of operations, see [Table 611](#).

Table 611. LSSGOP_PositionContactAddress Operations

Name	Description
PositionContactAddressInsert	Creates a positioncontactaddress record.
PositionContactAddressUpdate	Updates an existing positioncontactaddress record.
PositionContactAddressDelete	Deletes a positioncontactaddress record.
PositionContactAddressQueryPage	Queries for a positioncontactaddress record.

Request Message Description: PositionContactAddressInsert

For a description of this request message, see [Table 612](#).

Table 612. Request Message Description: PositionContactAddressInsert

Node	Description	Type
AddressId	Address Id.	String
ContactAddressId	Contact address Id.	String
ContactId	Contact Id.	String
PositionId	Position Id.	String

Response Message Description: PositionContactAddressInsert

For a description of this response message, see [Table 613](#).

Table 613. Response Message Description: PositionContactAddressInsert

Node	Description	Type
Id	Id of the newly created positioncontactaddress record.	String

Request Message Description: PositionContactAddressUpdate

For a description of this request message, see [Table 614](#).

Table 614. Request Message Description: PositionContactAddressUpdate

Node	Description	Type
Id	ID of the positioncontactaddress record.	String
AddressId	AddressId of the corresponding record.	String
ContactAddressId	ContactAddressId of the corresponding record.	String
ContactId	ContactId of the corresponding record.	String
PositionId	PositionId of the corresponding record.	String
Type	Type of the corresponding record.	String

Response Message Description: PositionContactAddressUpdate

For a description of this response message, see [Table 615](#).

Table 615. Response Message Description: PositionContactAddressUpdate

Node	Description	Type
Id	ID of the updated positioncontactaddress record.	String

Request Message Description: PositionContactAddressDelete

For a description of this request message, see [Table 616](#).

Table 616. Request Message Description: PositionContactAddressDelete

Node	Description	Type
Id	ID of a positioncontactaddress record to be deleted.	String

Response Message Description: PositionContactAddressDelete

For a description of this response message, see [Table 617](#).

Table 617. Response Message Description: PositionContactAddressDelete

Node	Description	Type
Id	ID of the deleted positioncontactaddress record.	String

Request Message Description: PositionContactAddressQueryPage

For a description of this request message, see [Table 618](#).

Table 618. Request Message Description: PositionContactAddressQueryPage

Node	Description	Type
Id	ID of the positioncontactaddress record to be queried.	String

Response Message Description: PositionContactAddressQueryPage

For a description of this response message, see [Table 619](#).

Table 619. Response Message Description: PositionContactAddressQueryPage

Node	Description	Type
Id	ID of the positioncontactaddress record.	String

LSSGOP_PositionContactAddress Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 620](#).

Table 620. LSSGOP_PositionContactAddress Service Object

Name	Boundary Object Type	Class
LSSGOP_PositionContactAddress	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 621](#).

Table 621. LSSGOP_PositionContactAddress Data Object

Siebel Repository Name	External Name
LS SGOP_PositionContactAddress	LS SGOP_PositionContactAddress

Interface Description (WSDL) for LSSGOP_PositionContactAddress

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_PositionContactAddress\http_siebel.com_asl_LSSGOP_PositionContactAddress.WSDL

LSSGOP_Product

Use this Web service to query records in the Product object.

LSSGOP_Product Operations

This Web service allows you to query records in the Product object. For a list of operations, see [Table 622](#).

Table 622. LSSGOP_Product Operations

Name	Description
ProductQueryPage	Queries for a product.

Request Message Description: ProductQueryPage

For a description of this request message, see [Table 623](#).

Table 623. Request Message Description: ProductQueryPage

Node	Description	Type
Id	Id of the product record to be queried.	String

Response Message Description: ProductQueryPage

For a description of this response message, see [Table 624](#).

Table 624. Response Message Description: ProductQueryPage

Node	Description	Type
Id	Id of the product record.	String

LSSGOP_Product Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 625](#).

Table 625. LSSGOP_Product Service Object

Name	Boundary Object Type	Class
LSSGOP_Product	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 626](#).

Table 626. LSSGOP_Product Data Object

Siebel Repository Name	External Name
LS SGOP_Product	LS SGOP_Product

Interface Description (WSDL) for LSSGOP_Product

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_Product\http_siebel.com_as1_LSSGOP_Product.WSDL

LSSGOP_ProductIndication

Use this Web service to query records in the ProductIndication object.

LSSGOP_ProductIndication Operations

This Web service allows you to query records in the ProductIndication object. For a list of operations, see [Table 627](#).

Table 627. LSSGOP_ProductIndication Operations

Name	Description
ProductIndicationQueryPage	Queries for a productindication record.

Request Message Description: ProductIndicationQueryPage

For a description of this request message, see [Table 628](#).

Table 628. Request Message Description: ProductIndicationQueryPage

Node	Description	Type
Id	ID of a productindication record to be queried.	String

Response Message Description: ProductIndicationQueryPage

For a description of this response message, see [Table 629](#).

Table 629. Response Message Description: ProductIndicationQueryPage

Node	Description	Type
Id	ID of a productindication record.	String

LSSGOP_ProductIndication Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 630](#).

Table 630. LSSGOP_ProductIndication Service Object

Name	Boundary Object Type	Class
LSSGOP_ProductIndication	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 631](#).

Table 631. LSSGOP_ProductIndication Data Object

Siebel Repository Name	External Name
LS SGOP_ProductIndication	LS SGOP_ProductIndication

Interface Description (WSDL) for LSSGOP_ProductIndication

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_ProductIndication\http_siebel.com_as1_LSSGOP_ProductIndication.WSDL

LSSGOP_ProductsDetailed

Use this Web service to create, update, delete, and query records in the ProductDetailed object.

LSSGOP_ProductsDetailed Operations

This Web service allows you to create, update, delete, and query records in the ProductDetailed object. For a list of operations, see [Table 632](#).

Table 632. LSSGOP_ProductsDetailed Operations

Name	Description
ProductsDetailedInsert	Creates a productdetailed record.
ProductsDetailedUpdate	Updates an existing productdetailed record.
ProductsDetailedDelete	Deletes a productdetailed record.
ProductsDetailedQueryPage	Queries for a productdetailed record.

Request Message Description: ProductsDetailedInsert

For a description of this request message, see [Table 633](#).

Table 633. Request Message Description: ProductsDetailedInsert

Node	Description	Type
Name	Name of the record.	String
Indication	Indication of the corresponding record.	String
Priority	Priority of the corresponding record.	String

Table 633. Request Message Description: ProductsDetailedInsert

Node	Description	Type
ProductAllocationId	Product allocation Id of the corresponding record.	String
ProductId	Product Id of the corresponding record.	String

Response Message Description: ProductsDetailedInsert

For a description of this response message, see [Table 634](#).

Table 634. Response Message Description: ProductsDetailedInsert

Node	Description	Type
Id	ID of the newly created productdetailed record.	String

Request Message Description: ProductsDetailedUpdate

For a description of this request message, see [Table 635](#).

Table 635. Request Message Description: ProductsDetailedUpdate

Node	Description	Type
Id	ID of the productdetailed record.	String
Name	Name of the corresponding record.	String
Indication	Indication of the corresponding record.	String
Priority	Priority of the corresponding record.	String
ProductAllocationId	Product allocation ID of the corresponding record.	String
ProductId	Product ID of the corresponding record.	String

Response Message Description: ProductsDetailedUpdate

For a description of this response message, see [Table 636](#).

Table 636. Response Message Description: ProductsDetailedUpdate

Node	Description	Type
Id	ID of the updated productdetailed record.	String

Request Message Description: ProductsDetailedDelete

For a description of this request message, see [Table 637](#).

Table 637. Request Message Description: ProductsDetailedDelete

Node	Description	Type
Id	ID of the productdetailed record to be deleted.	String

Response Message Description: ProductsDetailedDelete

For a description of this response message, see [Table 638](#).

Table 638. Response Message Description: ProductsDetailedDelete

Node	Description	Type
Id	ID of the deleted productdetailed record.	String

Request Message Description: ProductsDetailedQueryPage

For a description of this request message, see [Table 639](#).

Table 639. Request Message Description: ProductsDetailedQueryPage

Node	Description	Type
Id	ID of the productdetailed record to be queried.	String

Response Message Description: ProductsDetailedQueryPage

For a description of this response message, see [Table 640](#).

Table 640. Response Message Description: ProductsDetailedQueryPage

Node	Description	Type
Id	ID of the productdetailed record.	String

LSSGOP_ProductsDetailed Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 641](#).

Table 641. LSSGOP_ProductsDetailed Service Object

Name	Boundary Object Type	Class
LSSGOP_ProductsDetailed	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 642](#).

Table 642. LSSGOP_ProductsDetailed Data Object

Siebel Repository Name	External Name
LS SGOP_ProductsDetailed	LS SGOP_ProductsDetailed

Interface Description (WSDL) for LSSGOP_ProductsDetailed

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_ProductsDetailed\http_siebel.com_as_i_LSSGOP_ProductsDetailed.WSDL

LSSGOP_PromotionalItemsDropped

Use this Web service to create, update, delete, and query records in the PromotionalItemsDropped object.

LSSGOP_PromotionalItemsDropped Operations

This Web service allows you to create, update, delete, and query records in the PromotionalItemsDropped object. For a list of operations, see [Table 643](#).

Table 643. LSSGOP_PromotionalItemsDropped Operations

Name	Description
PromotionalItemsDroppedInsert	Creates a promotionalitemsdropped record.
PromotionalItemsDroppedUpdate	Updates an existing promotionalitemsdropped record.
PromotionalItemsDroppedDelete	Deletes a promotionalitemsdropped record.
PromotionalItemsDroppedQueryPage	Queries for a promotionalitemsdropped record.

Request Message Description: PromotionalItemsDroppedInsert

For a description of this request message, see [Table 644](#).

Table 644. Request Message Description: PromotionalItemsDroppedInsert

Node	Description	Type
ProductId	Product ID of the corresponding record.	String
ProductAllocationId	Product allocation ID of the corresponding record.	String
Quantity	Quantity of the corresponding record.	String
Type	Type of the corresponding record.	String

Response Message Description: PromotionalItemsDroppedInsert

For a description of this response message, see [Table 645](#).

Table 645. Response Message Description: PromotionalItemsDroppedInsert

Node	Description	Type
Id	ID of the newly created promotionalitemsdropped	String

Request Message Description: PromotionalItemsDroppedUpdate

For a description of this request message, see [Table 646](#).

Table 646. Request Message Description: PromotionalItemsDroppedUpdate

Node	Description	Type
Id	ID of the corresponding record.	String
ProductId	Product ID of the corresponding record.	String
ProductAllocationId	Product allocation ID of the corresponding record.	String
Quantity	Quantity of the corresponding record.	String
Type	Type of the corresponding record.	String

Response Message Description: PromotionalItemsDroppedUpdate

For a description of this response message, see [Table 647](#).

Table 647. Response Message Description: PromotionalItemsDroppedUpdate

Node	Description	Type
Id	ID of the updated promotionalitemsdropped record.	String

Request Message Description: PromotionalItemsDroppedDelete

For a description of this request message, see [Table 648](#).

Table 648. Request Message Description: PromotionalItemsDroppedDelete

Node	Description	Type
Id	ID of the promotionalitemsdropped record to be deleted.	String

Response Message Description: PromotionalItemsDroppedDelete

For a description of this response message, see [Table 649](#).

Table 649. Response Message Description: PromotionalItemsDroppedDelete

Node	Description	Type
Id	ID of the deleted promotionalitemsdropped record.	String

Request Message Description: PromotionalItemsDroppedQueryPage

For a description of this request message, see [Table 650](#).

Table 650. Request Message Description: PromotionalItemsDroppedQueryPage

Node	Description	Type
Id	ID of the promotionalitemsQuantity of the corresponding dropped record to be queried.	String

Response Message Description: PromotionalItemsDroppedQueryPage

For a description of this response message, see [Table 651](#).

Table 651. Response Message Description: PromotionalItemsDroppedQueryPage

Node	Description	Type
Id	ID of the promotionalitemsdropped record.	String

LSSGOP_PromotionalItemsDropped Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 652](#).

Table 652. LSSGOP_PromotionalItemsDropped Service Object

Name	Boundary Object Type	Class
LSSGOP_PromotionalItemsDropped	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 653](#).

Table 653. LSSGOP_PromotionalItemsDropped Data Object

Siebel Repository Name	External Name
LS SGOP_PromotionalItemsDropped	LS SGOP_PromotionalItemsDropped

Interface Description (WSDL) for LSSGOP_PromotionalItemsDropped

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_PromotionalItemsDropped\http_siebel.com_asi_LSSGOP_PromotionalItemsDropped.WSDL

LSSGOP_RelatedAccount

Use this Web service to create, update, delete, and query records in the RelatedAccount object.

LSSGOP_RelatedAccount Operations

This Web service allows you to create, update, delete, and query records in the RelatedAccount object. For a list of operations, see [Table 654](#).

Table 654. LSSGOP_RelatedAccount Operations

Name	Description
RelatedAccountInsert	Creates a relatedaccount record.
RelatedAccountUpdate	Updates an existing relatedaccount record.
RelatedAccountDelete	Deletes a relatedaccount record.
RelatedAccountQueryPage	Queries for a relatedaccount record.

Request Message Description: RelatedAccountInsert

For a description of this request message, see [Table 655](#).

Table 655. Request Message Description: RelatedAccountInsert

Node	Description	Type
AccountId	Account Id of the corresponding record.	String
RelatedAccountId	Related account Id of the corresponding record.	String
RelationshipRole	Relationship role of the corresponding record.	String

Response Message Description: RelatedAccountInsert

For a description of this response message, see [Table 656](#).

Table 656. Response Message Description: RelatedAccountInsert

Node	Description	Type
Id	Id of the newly created relatedaccount record.	String

Request Message Description: RelatedAccountUpdate

For a description of this request message, see [Table 657](#).

Table 657. Request Message Description: RelatedAccountUpdate

Node	Description	Type
Id	Id of the relatedaccount record.	String
AccountId	Account Id of the corresponding record.	String

Table 657. Request Message Description: RelatedAccountUpdate

Node	Description	Type
RelatedAccountId	Related account ID of the corresponding record.	String
RelationshipRole	Relationship role of the corresponding record.	String

Response Message Description: RelatedAccountUpdate

For a description of this response message, see [Table 658](#).

Table 658. Response Message Description: RelatedAccountUpdate

Node	Description	Type
Id	ID of the updated relatedaccount record.	String

Request Message Description: RelatedAccountDelete

For a description of this request message, see [Table 659](#).

Table 659. Request Message Description: RelatedAccountDelete

Node	Description	Type
Id	ID of the relatedaccount record to be deleted.	String

Response Message Description: RelatedAccount Delete

For a description of this response message, see [Table 660](#).

Table 660. Response Message Description: RelatedAccountDelete

Node	Description	Type
Id	ID of the deleted relatedaccount record.	String

Request Message Description: RelatedAccountQueryPage

For a description of this request message, see [Table 661](#).

Table 661. Request Message Description: RelatedAccountQueryPag

Node	Description	Type
Id	ID of the relatedaccount record to be queried.	String

Response Message Description: RelatedAccountQueryPage

For a description of this response message, see [Table 662](#).

Table 662. Response Message Description: RelatedAccountQueryPage

Node	Description	Type
Id	ID of the relatedaccount record.	String

LSSGOP_RelatedAccount Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 663](#).

Table 663. LSSGOP_RelatedAccount Service Object

Name	Boundary Object Type	Class
LSSGOP_RelatedAccount	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 664](#).

Table 664. LSSGOP_RelatedAccount Data Object

Siebel Repository Name	External Name
LS SGOP_RelatedAccount	LS SGOP_RelatedAccount

Interface Description (WSDL) for LSSGOP_RelatedAccount

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_RelatedAccount\http_siebel.com_as1_LSSGOP_RelatedAccount.WSDL

LSSGOP_RelatedContact

Use this Web service to create, update, delete, and query records in the RelatedContact object.

LSSGOP_RelatedContact Operations

This Web service allows you to create, update, delete, and query records in the RelatedContact object. For a list of operations, see [Table 665](#).

Table 665. LSSGOP_RelatedContact Operations

Name	Description
RelatedContactInsert	Creates a relatedcontact record.
RelatedContactUpdate	Updates an existing relatedcontact record.
RelatedContactDelete	Deletes a relatedcontact record.
RelatedContactQueryPage	Queries for a relatedcontact record.

Request Message Description: RelatedContactInsert

For a description of this request message, see [Table 666](#).

Table 666. Request Message Description: RelatedContactInsert

Node	Description	Type
ContactId	Contact ID of the corresponding record.	String
RelatedContactId	Related contact ID of the corresponding record.	String
Role	Role of the corresponding record.	String

Response Message Description: RelatedContactInsert

For a description of this response message, see [Table 667](#).

Table 667. Response Message Description: RelatedContactInsert

Node	Description	Type
Id	ID of the newly created relatedcontact record.	String

Request Message Description: RelatedContactUpdate

For a description of this request message, see [Table 668](#).

Table 668. Request Message Description: RelatedContactUpdate

Node	Description	Type
Id	ID of the relatedcontact record.	String
ContactId	ContactId of the corresponding record.	String

Table 668. Request Message Description: RelatedContactUpdate

Node	Description	Type
RelatedContactId	RelatedContactId of the corresponding record.	String
Role	Role of the corresponding record.	String

Response Message Description: RelatedContactUpdate

For a description of this response message, see [Table 669](#).

Table 669. Response Message Description: RelatedContactUpdate

Node	Description	Type
Id	ID of the updated relatedcontact record.	String

Request Message Description: RelatedContactDelete

For a description of this request message, see [Table 670](#).

Table 670. Request Message Description: RelatedContactDelete

Node	Description	Type
Id	ID of the relatedcontact record to be deleted.	String

Response Message Description: RelatedContactDelete

For a description of this response message, see [Table 671](#).

Table 671. Response Message Description: RelatedContactDelete

Node	Description	Type
Id	ID of the deleted relatedcontact record.	String

Request Message Description: RelatedContactQueryPage

For a description of this request message, see [Table 672](#).

Table 672. Request Message Description: RelatedContactQueryPage

Node	Description	Type
Id	ID of the relatedcontact record to be queried.	String

Response Message Description: RelatedContactQueryPage

For a description of this response message, see [Table 673](#).

Table 673. Response Message Description: RelatedContactQueryPage

Node	Description	Type
Id	ID of the relatedcontact record.	String

LSSGOP_RelatedContact Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 674](#).

Table 674. LSSGOP_RelatedContact Service Object

Name	Boundary Object Type	Class
LSSGOP_RelatedContact	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 675](#).

Table 675. LSSGOP_RelatedContact Service Object

Siebel Repository Name	External Name
LS SGOP_RelatedContact	LS SGOP_RelatedContact

Interface Description (WSDL) for LSSGOP_RelatedContact

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_RelatedContact\http_siebel.com_asl_LSSGOP_RelatedContact.WSDL

LSSGOP_RelatedLiterature

Use this Web service to create, update, delete, and query records in the RelatedLiterature object.

LSSGOP_RelatedLiterature Operations

This Web service allows you to create, update, delete, and query the RelatedLiterature object. For a list of operations, see [Table 676](#).

Table 676. LSSGOP_RelatedLiterature Operations

Name	Description
RelatedLiteratureInsert	Creates a relatedliterature record.
RelatedLiteratureUpdate	Updates an existing relatedliterature record.
RelatedLiteratureDelete	Deletes a relatedliterature record.
RelatedLiteratureQueryPage	Queries for a relatedliterature record.

Request Message Description: RelatedLiteratureInsert

For a description of this request message, see [Table 677](#).

Table 677. Request Message Description: RelatedLiteratureInsert

Node	Description	Type
LitId	Name of the account to be inserted.	String
ParLitId	ParLitId of the corresponding record.	String

Response Message Description: RelatedLiteratureInsert

For a description of this response message, see [Table 678](#).

Table 678. Response Message Description: RelatedLiteratureInsert

Node	Description	Type
Id	ID of the newly created relatedliterature record.	String

Request Message Description: RelatedLiteratureUpdate

For a description of this request message, see [Table 679](#).

Table 679. Request Message Description: RelatedLiteratureUpdate

Node	Description	Type
Id	ID of a relatedliterature record.	String
LitId	Literature ID of the corresponding record.	String
ParLitId	ParLitId of the corresponding record.	String

Response Message Description: RelatedLiteratureUpdate

For a description of this response message, see [Table 680](#).

Table 680. Response Message Description: RelatedLiteratureUpdate

Node	Description	Type
Id	ID of the updated relatedliterature record.	String

Request Message Description: RelatedLiteratureDelete

For a description of this request message, see [Table 681](#).

Table 681. Request Message Description: RelatedLiteratureDelete

Node	Description	Type
Id	ID of the account to be designated as relatedliterature.	String

Response Message Description: RelatedLiteratureDelete

For a description of this response message, see [Table 682](#).

Table 682. Response Message Description: RelatedLiteratureDelete

Node	Description	Type
Id	ID of the deleted relatedliterature record.	String

Request Message Description: RelatedLiteratureQueryPage

For a description of this request message, see [Table 683](#).

Table 683. Request Message Description: RelatedLiteratureQueryPage

Node	Description	Type
Id	ID of the account to be queried.	String

Response Message Description: RelatedLiteratureQueryPage

For a description of this response message, see [Table 684](#).

Table 684. Response Message Description: RelatedLiteratureQueryPage

Node	Description	Type
Id	ID of the relatedliterature record.	String

LSSGOP_RelatedLiterature Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 685](#).

Table 685. LSSGOP_RelatedLiterature Service Object

Name	Boundary Object Type	Class
LSSGOP_RelatedLiterature	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 686](#).

Table 686. LSSGOP_RelatedLiterature Data Object

Siebel Repository Name	External Name
LS SGOP_RelatedLiterature	LS SGOP_RelatedLiterature

Interface Description (WSDL) for LSSGOP_RelatedLiterature

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_RelatedLiterature\http_siebel.com_asl_LSSGOP_RelatedLiterature.WSDL

LSSGOP_RetailObjective

Use this Web service to create, update, delete, and query records in the RetailObjective object.

LSSGOP_RetailObjective Operations

This Web service allows you to create, update, delete, and query records in the RetailObjective object. For a list of operations, see [Table 687](#).

Table 687. LSSGOP_RetailObjective Operations

Name	Description
RetailObjectiveInsert	Creates a retailobjective record.
RetailObjectiveUpdate	Updates an existing retailobjective record.

Table 687. LSSGOP_RetailObjective Operations

Name	Description
RetailObjectiveDelete	Deletes a retailobjective record.
RetailObjectiveQueryPage	Queries for a retailobjective record.

Request Message Description: RetailObjectiveInsert

For a description of this request message, see [Table 688](#).

Table 688. Request Message Description: RetailObjectiveInsert

Node	Description	Type
Name	Name of the corresponding record.	String
Description	Description of the corresponding record.	String
StartDate	Start date of the corresponding record.	String
EndDate	End date of the corresponding record.	String
GoalRevenueDate	Goal revenue date of the corresponding record.	String
PeriodName	Period name of the corresponding record.	String
Type	Type of the corresponding record.	String
PromoNum	Promotion number of the corresponding record.	String

Response Message Description: RetailObjectiveInsert

For a description of this response message, see [Table 689](#).

Table 689. Response Message Description: RetailObjectiveInsert

Node	Description	Type
Id	ID of the newly created retailobjective	String

Request Message Description: RetailObjectiveUpdate

For a description of this request message, see [Table 690](#).

Table 690. Request Message Description: RetailObjectiveUpdate

Node	Description	Type
Id	ID of the retailobjective record.	String
Name	Name of the corresponding record.	String
Description	Description of the corresponding record.	String
StartDate	Start date of the corresponding record.	String
EndDate	End date of the corresponding record.	String
GoalRevenueDate	Goal revenue date of the corresponding record.	String
PeriodName	Period name of the corresponding record.	String
Type	Type of the corresponding record.	String
PromoNum	Promotion number of the corresponding record.	String
Type	Name of the corresponding record.	String

Response Message Description: RetailObjectiveUpdate

For a description of this response message, see [Table 691](#).

Table 691. Response Message Description: RetailObjectiveUpdate

Node	Description	Type
Id	ID of the updated retailobjective record.	String

Request Message Description: RetailObjectiveDelete

For a description of this request message, see [Table 692](#).

Table 692. Request Message Description: RetailObjectiveDelete

Node	Description	Type
Id	ID of the retailobjective record to be deleted.	String

Response Message Description: RetailObjectiveDelete

For a description of this response message, see [Table 693](#).

Table 693. Response Message Description: RetailObjectiveDelete

Node	Description	Type
Id	ID of the deleted retailobjective record.	String

Request Message Description: RetailObjectiveQueryPage

For a description of this request message, see [Table 694](#).

Table 694. Request Message Description: RetailObjectiveQueryPage

Node	Description	Type
Id	ID of the retailobjective record to be queried.	String

Response Message Description: RetailObjectiveQueryPage

For a description of this response message, see [Table 695](#).

Table 695. Response Message Description: RetailObjectiveQueryPage

Node	Description	Type
Id	ID of the retailobjective record.	String

LSSGOP_RetailObjective Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 696](#).

Table 696. LSSGOP_RetailObjective Service Object

Name	Boundary Object Type	Class
LSSGOP_RetailObjective	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 697](#).

Table 697. LSSGOP_RetailObjective Data Object

Siebel Repository Name	External Name
LS_SGOP_RetailObjective	LS_SGOP_RetailObjective

Interface Description (WSDL) for LSSGOP_RetailObjective

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_RetailObjective\http_siebel.com_asl_LSSGOP_RetailObjective.WSDL

LSSGOP_Revenue

Use this Web service to create, update, delete, and query records in the Revenue object.

LSSGOP_Revenue Operations

This Web service allows you to create, update, delete, and query records in the Revenue object. For a list of operations, see [Table 698](#).

Table 698. LSSGOP_Revenue Operations

Name	Description
RevenueInsert	Creates a revenue record.
RevenueUpdate	Updates an existing revenue record.
RevenueDelete	Deletes a revenue record.
RevenueQueryPage	Queries for a revenue record.

Request Message Description: RevenueInsert

For a description of this request message, see [Table 699](#).

Table 699. Request Message Description: RevenueInsert

Node	Description	Type
Date	Date of the corresponding record.	String

Response Message Description: RevenueInsert

For a description of this response message, see [Table 700](#).

Table 700. Response Message Description: RevenueInsert

Node	Description	Type
Id	ID of the newly created revenue record.	String

Request Message Description: RevenueUpdate

For a description of this request message, see [Table 701](#).

Table 701. Request Message Description: RevenueUpdate

Node	Description	Type
Id	ID of the revenue record.	String
Date	Date of the corresponding record.	String

Response Message Description: RevenueUpdate

For a description of this response message, see [Table 702](#).

Table 702. Response Message Description: RevenueUpdate

Node	Description	Type
Id	ID of the updated revenue record.	String

Request Message Description: RevenueDelete

For a description of this request message, see [Table 703](#).

Table 703. Request Message Description: RevenueDelete

Node	Description	Type
Id	ID of the revenue record to be deleted	String

Response Message Description: RevenueDelete

For a description of this response message, see [Table 704](#).

Table 704. Response Message Description: RevenueDelete

Node	Description	Type
Id	ID of the deleted revenue	String

Request Message Description: RevenueQueryPage

For a description of this request message, see [Table 705](#).

Table 705. Request Message Description: RevenueQueryPage

Node	Description	Type
Id	ID of the revenue to be queried.	String

Response Message Description: RevenueQueryPage

For a description of this response message, see [Table 706](#).

Table 706. Response Message Description: RevenueQueryPage

Node	Description	Type
Id	ID of the revenue.	String

LSSGOP_Revenue Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 707](#).

Table 707. LSSGOP_Revenue Service Object

Name	Boundary Object Type	Class
LSSGOP_Revenue	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 708](#).

Table 708. LSSGOP_Revenue Data Object

Siebel Repository Name	External Name
LS SGOP_Revenue	LS SGOP_Revenue

Interface Description (WSDL) for LSSGOP_Revenue

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_Revenue\http_siebel.com_as1_LSSGOP_Revenue.WSDL

LSSGOP_SampleDisclaimer

Use this Web service to create, update, delete, and query records in the SampleDisclaimer object.

LSSGOP_SampleDisclaimer Operations

This Web service allows you to create, update, delete, and query records in the SampleDisclaimer object. For a list of operations, see [Table 709](#).

Table 709. LSSGOP_SampleDisclaimer Operations

Name	Description
SampleDisclaimerInsert	Creates a sampledisclaimer record.
SampleDisclaimerUpdate	Updates an existing sampledisclaimer record.
SampleDisclaimerDelete	Deletes a sampledisclaimer record.
SampleDisclaimerQueryPage	Queries for a sampledisclaimer record.

Request Message Description: SampleDisclaimerInsert

For a description of this request message, see [Table 710](#).

Table 710. Request Message Description: SampleDisclaimerInsert

Node	Description	Type
Disclaimer	Name of the account to be inserted.	String
DisclaimerNumber	Disclaimer number.	Number

Response Message Description: SampleDisclaimerInsert

For a description of this response message, see [Table 711](#).

Table 711. Response Message Description: SampleDisclaimerInsert

Node	Description	Type
Id	ID of the newly created sampledisclaimer record.	String

Request Message Description: SampleDisclaimerUpdate

For a description of this request message, see [Table 712](#).

Table 712. Request Message Description: SampleDisclaimerUpdate

Node	Description	Type
Id	ID of the sampledisclaimer record.	String
Disclaimer	Disclaimer of the co.rresponding record.	String
DisclaimerNumber	Disclaimer number of the corresponding record.	String

Response Message Description: SampleDisclaimerUpdate

For a description of this response message, see [Table 713](#).

Table 713. Response Message Description: SampleDisclaimerUpdate

Node	Description	Type
Id	ID of the updated sampledisclaimer record.	String

Request Message Description: SampleDisclaimerDelete

For a description of this request message, see [Table 714](#).

Table 714. Request Message Description: SampleDisclaimerDelete

Node	Description	Type
Id	ID of the sampledisclaimer record to be deleted.	String

Response Message Description: SampleDisclaimerDelete

For a description of this response message, see [Table 715](#).

Table 715. Response Message Description: SampleDisclaimerDelete

Node	Description	Type
Id	ID of the deleted sampledisclaimer record.	String

Request Message Description: SampleDisclaimerQueryPage

For a description of this request message, see [Table 716](#).

Table 716. Request Message Description: SampleDisclaimerQueryPage

Node	Description	Type
Id	ID of the sampledisclaimer record to be queried.	String

Response Message Description: SampleDisclaimerQueryPage

For a description of this response message, see [Table 717](#).

Table 717. Response Message Description: SampleDisclaimerQueryPage

Node	Description	Type
Id	ID of the sampledisclaimer record.	String

LSSGOP_SampleDisclaimer Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 718](#).

Table 718. LSSGOP_SampleDisclaimer Service Object

Name	Boundary Object Type	Class
LSSGOP_SampleDisclaimer	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 719](#).

Table 719. LSSGOP_SampleDisclaimer Data Object

Siebel Repository Name	External Name
LS SGOP_SampleDisclaimer	LS SGOP_SampleDisclaimer

Interface Description (WSDL) for LSSGOP_SampleDisclaimer

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_SampleDisclaimer\http_siebel.com_asi_LSSGOP_SampleDisclaimer.WSDL

LSSGOP_SampleDropped

Use this Web service to create, update, delete, and query records in the SampleDropped object.

LSSGOP_SampleDropped Operations

This Web service allows you to create, update, delete, and query records in the SampleDropped object. For a list of operations, see [Table 720](#).

Table 720. LSSGOP_SampleDropped Operations

Name	Description
SampleDroppedInsert	Creates a sampledropped record.
SampleDroppedUpdate	Updates an existing sampledropped record.
SampleDroppedDelete	Deletes a sampledropped record.
SampleDroppedQueryPage	Queries for a sampledropped record.

Request Message Description: SampleDroppedInsert

For a description of this request message, see [Table 721](#).

Table 721. Request Message Description: SampleDroppedInsert

Node	Description	Type
Name	Name of the corresponding record.	String
LotId	Lot ID of the corresponding record.	String
ProductAllocationId	Product allocation ID of the corresponding record.	String
Quantity	Quantity of the corresponding record.	String
Type	Type of the corresponding record.	String

Response Message Description: SampleDroppedInsert

For a description of this response message, see [Table 722](#).

Table 722. Response Message Description: SampleDroppedInsert

Node	Description	Type
Id	ID of the newly created sampledropped record.	String

Request Message Description: SampleDroppedUpdate

For a description of this request message, see [Table 723](#).

Table 723. Request Message Description: SampleDroppedUpdate

Node	Description	Type
Id	ID of the sampledropped record.	String
Name	Name of the corresponding record.	String
LotId	Lot ID of the corresponding record.	Number
ProductAllocationId	Product allocation ID of the corresponding record.	Number
Quantity	Quantity of the corresponding record.	String
Type	Type of the corresponding record.	String

Response Message Description: SampleDroppedUpdate

For a description of this response message, see [Table 724](#).

Table 724. Response Message Description: SampleDroppedUpdate

Node	Description	Type
Id	ID of the updated sampledropped record.	String

Request Message Description: SampleDroppedDelete

For a description of this request message, see [Table 725](#).

Table 725. Request Message Description: SampleDroppedDelete

Node	Description	Type
Id	ID of the sampledropped record to be deleted.	String

Response Message Description: SampleDroppedDelete

For a description of this response message, see [Table 726](#).

Table 726. Response Message Description: SampleDroppedDelete

Node	Description	Type
Id	ID of the deleted sampledropped record.	String

Request Message Description: SampleDroppedQueryPage

For a description of this request message, see [Table 727](#).

Table 727. Request Message Description: SampleDroppedQueryPage

Node	Description	Type
Id	ID of the sampledropped record to be queried.	String

Response Message Description: SampleDroppedQueryPage

For a description of this response message, see [Table 728](#).

Table 728. Response Message Description: SampleDroppedQueryPage

Node	Description	Type
Id	ID of the sampledropped record.	String

LSSGOP_SampleDropped Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 729](#).

Table 729. LSSGOP_SampleDropped Service Object

Name	Boundary Object Type	Class
LSSGOP_SampleDropped	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 730](#)

Table 730. LSSGOP_SampleDropped Data Object

Siebel Repository Name	External Name
LS SGOP_SampleDropped	LS SGOP_SampleDropped

Interface Description (WSDL) for LSSGOP_SampleDropped

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_SampleDropped\http_siebel.com_asl_LSSGOP_SampleDropped.WSDL

LSSGOP_SampleInventory

Use this Web service to create, update, delete, and query records in the SampleInventory object.

LSSGOP_SampleInventory Operations

This Web service allows you to create, update, delete, and query records in the SampleInventory object. For a list of operations, see [Table 731](#).

Table 731. LSSGOP_SampleInventory Operations

Name	Description
SampleInventoryInsert	Creates a sampleinventory record.
SampleInventoryUpdate	Updates an existing sampleinventory record.
SampleInventoryDelete	Deletes a sampleinventory record.
SampleInventoryQueryPage	Queries for a sampleinventory record.

Request Message Description: SampleInventoryInsert

For a description of this request message, see [Table 732](#).

Table 732. Request Message Description: SampleInventoryInsert

Node	Description	Type
ProductId	Product ID of the corresponding record.	String
StockPeriodId	Stock period ID of the corresponding record.	String
ServerQuantity	Server quantity of the corresponding record.	String
ClientQuantity	Client quantity of the corresponding record.	String

Response Message Description: SampleInventoryInsert

For a description of this response message, see [Table 733](#).

Table 733. Response Message Description: SampleInventoryInsert

Node	Description	Type
Id	ID of the newly created sampleinventory	String

Request Message Description: SampleInventoryUpdate

For a description of this request message, see [Table 734](#).

Table 734. Request Message Description: SampleInventoryUpdate

Node	Description	Type
Id	ID of the sampleinventory.	String
ProductId	Product ID of the corresponding record.	String
StockPeriodId	Stock period ID of the corresponding record.	String
ServerQuantity	Server quantity of the corresponding record.	String
ClientQuantity	Client quantity of the corresponding record.	String

Response Message Description: SampleInventoryUpdate

For a description of this response message, see [Table 735](#).

Table 735. Response Message Description: SampleInventoryUpdate

Node	Description	Type
Id	ID of the updated sampleinventory record.	String

Request Message Description: SampleInventoryDelete

For a description of this request message, see [Table 736](#).

Table 736. Request Message Description: SampleInventoryDelete

Node	Description	Type
Id	ID of the sampleinventory record to be deleted.	String

Response Message Description: SampleInventoryDelete

For a description of this response message, see [Table 737](#).

Table 737. Response Message Description: SampleInventoryDelete

Node	Description	Type
Id	ID of the deleted sampleinventory record.	String

Request Message Description: SampleInventoryQueryPage

For a description of this request message, see [Table 738](#).

Table 738. Request Message Description: SampleInventoryQueryPage

Node	Description	Type
Id	ID of the sampleinventory record to be queried.	String

Response Message Description: SampleInventoryQueryPage

For a description of this response message, see [Table 739](#).

Table 739. Response Message Description: SampleInventoryQueryPage

Node	Description	Type
Id	ID of the sampleinventory record.	String

LSSGOP_SampleInventory Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 740](#).

Table 740. LSSGOP_SampleInventory Service Object

Name	Boundary Object Type	Class
LSSGOP_SampleInventory	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 741](#).

Table 741. LSSGOP_SampleInventory Data Object

Siebel Repository Name	External Name
LS SGOP_SampleInventory	LS SGOP_SampleInventory

Interface Description (WSDL) for LSSGOP_SampleInventory

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_SampleInventory\http_siebel.com_asl_LSSGOP_SampleInventory.WSDL

LSSGOP_SampleTransaction

Use this Web service to create, update, delete, and query records in the SampleTransaction object.

LSSGOP_SampleTransaction Operations

This Web service allows you to create, update, delete, and query records in the SampleTransaction object. For a list of operations, see [Table 742](#).

Table 742. LSSGOP_SampleTransaction Operations

Name	Description
SampleTransactionInsert	Creates a sampletransaction record.
SampleTransactionUpdate	Update an existing sampletransaction record.
SampleTransactionDelete	Delete a sampletransaction record.
SampleTransactionQueryPage	Query for a sampletransaction record.

Request Message Description: SampleTransactionInsert

For a description of this request message, see [Table 743](#).

Table 743. Request Message Description: SampleTransactionInsert

Node	Description	Type
Name	Name of the corresponding record.	String
TransactionDate	Transaction date of the corresponding record.	String
TransactionStatus	Transaction status of the corresponding record.	String

Response Message Description: SampleTransactionInsert

For a description of this response message, see [Table 744](#).

Table 744. Response Message Description: SampleTransactionInsert

Node	Description	Type
Id	ID of the newly created sampletransaction.	String

Request Message Description: SampleTransactionUpdate

For a description of this request message, see [Table 745](#).

Table 745. Request Message Description: SampleTransactionUpdate

Node	Description	Type
Id	ID of the sampletransaction record.	String
Name	Name of the corresponding record.	String
TransactionDate	Transaction date of the corresponding record.	String
TransactionStatus	Transaction status of the corresponding record.	String

Response Message Description: SampleTransactionUpdate

For a description of this response message, see [Table 746](#).

Table 746. Response Message Description: SampleTransactionUpdate

Node	Description	Type
Id	ID of the updated account.	String

Request Message Description: SampleTransactionDelete

For a description of this request message, see [Table 747](#).

Table 747. Request Message Description: SampleTransactionDelete

Node	Description	Type
Id	ID of the sampletransaction record to be deleted.	String

Response Message Description: SampleTransactionDelete

For a description of this response message, see [Table 748](#).

Table 748. Response Message Description: SampleTransactionDelete

Node	Description	Type
Id	ID of the deleted sampletransaction record.	String

Request Message Description: SampleTransactionQueryPage

For a description of this request message, see [Table 749](#).

Table 749. Request Message Description: SampleTransactionQueryPage

Node	Description	Type
Id	ID of the sampletransaction record to be queried.	String

Response Message Description: SampleTransactionQueryPage

For a description of this response message, see [Table 750](#).

Table 750. Response Message Description: SampleTransactionQueryPage

Node	Description	Type
Id	ID of the sampletransaction record.	String

LSSGOP_SampleTransaction Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 751](#).

Table 751. LSSGOP_SampleTransaction Service Object

Name	Boundary Object Type	Class
LSSGOP_SampleTransaction	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 752](#).

Table 752. LSSGOP_SampleTransaction Data Object

Siebel Repository Name	External Name
LS SGOP_SampleDisclaimer	LS SGOP_SampleDisclaimer

Interface Description (WSDL) for LSSGOP_SampleTransaction

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

...\LSSGOP_SampleTransaction\http_siebel.com_as1_LSSGOP_SampleTransaction.WSDL

LSSGOP_Signature

Use this Web service to create, update, delete, and query records in the Signature object.

LSSGOP_Signature Operations

This Web service allows you to create, update, delete, and query records in the Signature object. For a list of operations, see [Table 753](#).

Table 753. LSSGOP_Signature Operations

Name	Description
SignatureInsert	Creates a signature record.
SignatureUpdate	Updates an existing signature record.
SignatureDelete	Deletes a signature record.
SignatureQueryPage	Queries for a signature record.

Request Message Description: SignatureInsert

For a description of this request message, see [Table 754](#).

Table 754. Request Message Description: SignatureInsert

Node	Description	Type
ActivityId	Activity ID of the corresponding record.	String
CallDate	Call date of the corresponding record.	String
ContactId	Contact ID of the corresponding record.	String
DisclaimerId	Disclaimer ID of the corresponding record.	String
Signature	Signature of the corresponding record.	String
SignatureBodyText	Signature body text of the corresponding record.	String
SignatureHeaderText	Signature header text of the corresponding record.	String

Response Message Description: SignatureInsert

For a description of this response message, see [Table 755](#).

Table 755. Response Message Description: SignatureInsert

Node	Description	Type
Id	ID of the newly created signature record.	String

Request Message Description: SignatureUpdate

For a description of this request message, see [Table 756](#).

Table 756. Request Message Description: SignatureUpdate

Node	Description	Type
Id	ID of the signature record.	String
ActivityId	Activity ID of the corresponding record.	String
CallDate	Call date of the corresponding record.	String
ContactId	Contact ID of the corresponding record.	String
DisclaimerId	Disclaimer ID of the corresponding record.	String
Signature	Signature of the corresponding record.	String
SignatureBodyText	Signature body text of the corresponding record.	String
SignatureHeaderText	Signature header text of the corresponding record.	String

Response Message Description: SignatureUpdate

For a description of this response message, see [Table 757](#).

Table 757. Response Message Description: SignatureUpdate

Node	Description	Type
Id	Activity ID of the corresponding record.	String

Request Message Description: SignatureDelete

For a description of this request message, see [Table 758](#).

Table 758. Request Message Description: SignatureDelete

Node	Description	Type
Id	ID of the signature record to be deleted.	String

Response Message Description: SignatureDelete

For a description of this response message, see [Table 759](#).

Table 759. Response Message Description: SignatureDelete

Node	Description	Type
Id	ID of the deleted signature record.	String

Request Message Description: SignatureQueryPage

For a description of this request message, see [Table 760](#).

Table 760. Request Message Description: SignatureQueryPage

Node	Description	Type
Id	ID of the signature record to be queried.	String

Response Message Description: SignatureQueryPage

For a description of this response message, see [Table 761](#).

Table 761. Response Message Description: SignatureQueryPage

Node	Description	Type
Id	ID of the signature record.	String

LSSGOP_Signature Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 762](#).

Table 762. LSSGOP_Signature Service Object

Name	Boundary Object Type	Class
LSSGOP_Signature	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 763](#).

Table 763. LSSGOP_Signature Data Object

Siebel Repository Name	External Name
LS SGOP_Signature	LS SGOP_Signature

Interface Description (WSDL) for LSSGOP_Signature

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

...\LSSGOP_Signature\http_siebel.com_asl_LSSGOP_Signature.WSDL

LSSGOP_TransactionItem

Use this Web service to create, update, delete, and query records in the TransactionItem object.

LSSGOP_TransactionItem Operations

This Web service allows you to create, update, delete, and query records in the TransactionItem object. For a list of operations, see [Table 764](#).

Table 764. LSSGOP_TransactionItem Operations

Name	Description
TransactionItemInsert	Creates a transactionitem record.
TransactionItemUpdate	Updates a existing transactionitem record.
TransactionItemDelete	Deletes a transactionitem record.
TransactionItemQueryPage	Queries for a transactionitem record.

Request Message Description: TransactionItemInsert

For a description of this request message, see [Table 765](#).

Table 765. Request Message Description: TransactionItemInsert

Node	Description	Type
ProductId	Product ID of the corresponding record.	String
SampleTransactionId	Sample transaction ID of the corresponding record.	String
Lot	Lot of the corresponding record.	String
LineNumber	Line number of the corresponding record.	String
ItemStatus	Item status of the corresponding record.	String
Quantity	Quantity of the corresponding record.	String

Response Message Description: TransactionItemInsert

For a description of this response message, see [Table 766](#).

Table 766. Response Message Description: TransactionItemInsert

Node	Description	Type
Id	ID of the newly created transactionitem record.	String

Request Message Description: TransactionItemUpdate

For a description of this request message, see [Table 767](#).

Table 767. Request Message Description: TransactionItemUpdat

Node	Description	Type
Id	ID of the transactionitem record.	String
ProductId	Product ID of the corresponding record.	String
SampleTransactionId	Sample transaction ID of the corresponding record.	String
Lot	Lot of the corresponding record.	String
LineNumber	Line number of the corresponding record.	String

Table 767. Request Message Description: TransactionItemUpdat

Node	Description	Type
ItemStatus	Item status of the corresponding record.	String
Quantity	Quantity of the corresponding record.	String

Response Message Description: TransactionItemUpdate

For a description of this response message, see [Table 768](#).

Table 768. Response Message Description: TransactionItemUpdate

Node	Description	Type
Id	ID of the updated account.	String

Request Message Description: TransactionItemDelete

For a description of this request message, see [Table 769](#).

Table 769. Request Message Description: TransactionItemDelete

Node	Description	Type
Id	ID of the transactionitem record to be deleted.	String

Response Message Description: TransactionItemDelete

For a description of this response message, see [Table 770](#).

Table 770. Response Message Description: TransactionItemDelete

Node	Description	Type
Id	ID of the deleted transactionitem record.	String

Request Message Description: TransactionItemQueryPage

For a description of this request message, see [Table 771](#).

Table 771. Request Message Description: TransactionItemQueryPage

Node	Description	Type
Id	ID of the transactionitem record to be queried.	String

Response Message Description: TransactionItemQueryPage

For a description of this response message, see [Table 772](#).

Table 772. Response Message Description: TransactionItemQueryPage

Node	Description	Type
Id	ID of the transactionitem record.	String

LSSGOP_TransactionItem Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 773](#).

Table 773. LSSGOP_TransactionItem Service Object

Name	Boundary Object Type	Class
LSSGOP_TransactionItem	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 774](#).

Table 774. LSSGOP_TransactionItem Data Object

Siebel Repository Name	External Name
LS SGOP_TransactionItem	LS SGOP_TransactionItem

Interface Description (WSDL) for LSSGOP_TransactionItem

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_TransactionItem\http_siebel.com_asl_LSSGOP_TransactionItem.WSDL

ModificationTracking

Use this Web service to query records in the ModificationTracking object.

ModificationTracking Operations

This Web service allows you to query records in the ModificationTracking object. For a list of operations, see [Table 775](#).

Table 775. ModificationTracking Operations

Name	Description
QueryPage	Creates a modificationtracking record.

Request Message Description: QueryPage

For a description of this request message, see [Table 776](#).

Table 776. Request Message Description: QueryPage

Node	Description	Type
Id	ID of a modificationtracking record to be queried.	String

Response Message Description: QueryPage

For a description of this response message, see [Table 777](#).

Table 777. Response Message Description: QueryPage

Node	Description	Type
Id	ID of a modificationtracking record.	String

ModificationTracking Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 778](#).

Table 778. ModificationTracking Service Object

Name	Boundary Object Type	Class
Modification Tracking	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 779](#).

Table 779. ModificationTracking Data Object

Siebel Repository Name	External Name
Modification Tracking	LS SGOP Modification Tracking

Interface Description (WSDL) for ModificationTracking

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \ModificationTracking\http_siebel.com_asl_ModificationTracking.WSDL

LSSGOP_ModificationTrackingPurge

Use this Web service to delete records from the ModificationTracking object.

LSSGOP_ModificationTrackingPurge Operations

This Web service allows you to delete records from the ModificationTracking object. For a list of operations, see [Table 780](#).

Table 780. LSSGOP_ModificationTrackingPurge Operations

Name	Description
Delete	Deletes a modificationtracking record.

Request Message Description: Delete

For a description of this request message, see [Table 781](#).

Table 781. Request Message Description: Delete

Node	Description	Type
Id	ID of a modificationtracking record to be deleted.	String

Response Message Description: Delete

For a description of this response message, see [Table 782](#).

Table 782. Response Message Description: Delete

Node	Description	Type
Id	ID of a deleted modificationtracking record.	String

LSSGOP_ModificationTrackingPurge Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 783](#).

Table 783. LSSGOP_ModificationTrackingPurge Service Object

Name	Boundary Object Type	Class
Modification Tracking	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 784](#).

Table 784. LSSGOP_ModificationTrackingPurge Service Object

Siebel Repository Name	External Name
LS SGOP Modification Tracking Purge	LS SGOP Modification Tracking

Interface Description (WSDL) for LSSGOP_ModificationTrackingPurge

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \LSSGOP_ModificationTrackingPurge\http_siebel.com_asi_ModificationTrackingPurge.WSDL

MatchAccountSiebelReqABCImpl

Use this outbound Web service to synchronize account details with the participating application by fetching the account details from the Siebel database. This Web service is called when the fetch process is triggered in the Siebel application from the Account list or form applets and also from the Match Account pop-up applet.

MatchAccountSiebelReqABCImpl Operations

For a list of operations associated with this Web service, see [Table 785](#).

Table 785. MatchAccountSiebelReqABCImpl Operations

Name	Description
MatchAccount	Use this Web service to query an account to satisfy search criteria from a participating application and display the results in the Siebel CRM application without storing the data in the Siebel database. This operation is called from the Match Account pop-up window when a user clicks the Go button to query account details from the participating application.

Request Message Description: MatchAccount

For a description of this request message, see [Table 786](#).

Table 786. Request Message Description: MatchAccount

Node	Description	Type
MatchAccountReqMsg:payload	Optional	Hierarchy
CustomHeaderContext	Optional	Hierarchy

Response Message Description: MatchAccount

For a description of this response message, see [Table 787](#).

Table 787. Request Message Description: MatchAccount

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
MatchAccountRespMsg:payload	Optional	Hierarchy
XMLHierarchyOutput	Optional	Hierarchy
faultactor	Optional	String
faultcode	Optional	String
faultstring	Optional	String
MatchAccountFaultMsg:payload	Optional	Integration Object

MatchAccountSiebelReqABCImpl Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 788](#).

Table 788. MatchAccountSiebelReqABCImpl Service Object

Siebel Repository Name	Boundary Object Type	Class
SSWI External Account Integration Process	Workflow	Not applicable

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 789](#).

Table 789. MatchAccountSiebelReqABCImpl Data Object

Siebel Repository Name	External Name
SWIMatchAccountVBCIO	Account
Fault	Fault

Methods

For a description of the methods for this Web service, see [Table 790](#).

Table 790. MatchAccountSiebelReqABCImpl Methods

Operation	Method
MatchAccount	MatchAccount

Interface Description (WSDL) for MatchAccountSiebelReqABCImpl

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

WSDL

...WSDL\MatchAccountSiebelReqABCImpl.wsd1

MatchContactSiebelReqABCImpl

Use this outbound Web service to synchronize Contact details with the participating application and the Siebel database. This Web service is called from the Siebel application when the fetch process is called from the Contact list or form applets and also from the Match Contact pop-up applet.

MatchContactSiebelReqABCImpl Operations

For a list of operations associated with this Web service, see [Table 791](#).

Table 791. MatchContactSiebelReqABCImpl Operations

Name	Description
MatchContact	Use this Web service to query a contact to satisfy search criteria from a participating application and display the results in the Siebel CRM application without storing the data in the Siebel database. This operation is called from the Match Contact pop-up window when a user clicks the Go button to query account details from the participating application.

Request Message Description: MatchContact

For a description of this request message, see [Table 792](#).

Table 792. Request Message Description: MatchContact

Node	Description	Type
MatchContactReqMsg:payload	Optional	Hierarchy
CustomHeaderContext	Optional	Hierarchy

Response Message Description: MatchContact

For a description of this response message, see [Table 793](#).

Table 793. Response Message Description: MatchContact

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
MatchContactRespMsg:payload	Optional	Hierarchy
XMLHierarchyOutput	Optional	Hierarchy
faultactor	Optional	String
faultcode	Optional	String
faultstring	Optional	String
MatchContactFaultMsg:payload	Optional	Integration Object

MatchContactSiebelReqABCImpl Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 794](#).

Table 794. MatchContactSiebelReqABCImpl Service Object

Siebel Repository Name	Boundary Object Type	Class
SWI External Contact Integration Process	Workflow	Not applicable

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 795](#).

Table 795. MatchContactSiebelReqABCImpl Data Object

Siebel Repository Name	External Name
SWIMatchAccountVBCIO	SWIMatchContactVBCIO
Fault	Fault

Methods

For a description of the methods for this Web service, see [Table 796](#).

Table 796. MatchAccountSiebelReqABCImpl Methods

Operation	Method
MatchContact	MatchContact

MktgDeduplicationService

Use this Web service to check whether a duplicate record exists for an account, contact, opportunity or prospect.

Mktg Deduplication Service Operations

For a list of operations associated with this Web service, see [Table 797](#).

Table 797. Mktg Deduplication Service Operations

Node	Description
MktgDeduplicationServiceMatchAccount	Matches account information provided with the accounts in the system and returns the row ids of the duplicates found with the score for each account.
MktgDeduplicationServiceMatchOpportunity	Matches the opportunities.
MktgDeduplicationServiceMatchProspect	Matches the prospects.
MktgDeduplicationServiceMatchContact	Matches the contacts.

Request Message Description: MktgDeduplicationServiceMatchAccount

For a description of this request message, see [Table 798](#).

Table 798. Request Message Description: MktgDeduplicationServiceMatchAccount

Node	Description	Type
DUNS Number	Dun and Bradstreet data universal numbering system number.	String
Name	Account name.	String
Primary Account City	City name.	String
Primary Account Country	Country name.	String
Primary Account Postal Code	City postal code.	String
Primary Account State	State.	String
Primary Account Street Address	Street address of primary account.	String

Response Message Description: MktgDeduplicationServiceMatchAccount

For a description of this response message, see [Table 799](#).

Table 799. Response Message Description: MktgDeduplicationServiceMatchAccount

Node	Description	Type
HasMatch	The output string is "hasMatch" or "hasNoMatch".	String
Match Info	Score of the match and row id of the record matched.	Integration Object

Response Message Description: MktgDeduplicationServiceMatchOpportunity

For a description of this response message, see [Table 800](#).

Table 800. Response Message Description: MktgDeduplicationServiceMatchOpportunity

Node	Description	Type
Account Id	Opportunity's account ID.	String
Business Unit Id	Opportunity's business unit ID.	String
Name	Opportunity's name.	String

Response Message Description: MktgDeduplicationServiceMatchOpportunity

For a description of this response message, see [Table 801](#).

Table 801. Response Message Description: MktgDeduplicationServiceMatchOpportunity

Node	Description	Type
HasMatch	Output string as "hasMatch" or "hasNoMatch".	String
Match Info	Score of the match and row id of the record matched.	Integration Object

Request Message Description: MktgDeduplicationServiceMatchProspect

For a description of this request message, see [Table 802](#).

Table 802. Request Message Description: MktgDeduplicationServiceMatchProspect

Node	Description	Type
Account	Account name of prospect.	String
Phone	Phone number of prospect.	String
City	Prospect's city.	String
Country	Prospect's country.	String
Email Address	Prospect's email address.	String
First Name	Prospect's first name.	String
Home Phone #	Prospect's home phone number.	String
Last Name	Prospect's last name.	String
Middle Name	Prospect's middle name.	String
Primary Postal Code	Postal code.	String
Social Security Number	Prospect's social security number.	String
State	Prospect's state of residence.	String
Street Address	Prospect's street address.	String
Work Phone #	Prospect's work phone number.	String

Response Message Description: MktgDeduplicationServiceMatchProspect

For a description of this response message, see [Table 803](#).

Table 803. Response Message Description: MktgDeduplicationServiceMatchProspect

Node	Description	Type
HasMatch	Output String as "hasMatch" or "hasNoMatch".	String
Match Info	Score of the match and row id of the record matched.	Integration Object

Request Message Description: MktgDeduplicationServiceMatchContact

For a description of this request message, see [Table 804](#).

Table 804. Request Message Description: MktgDeduplicationServiceMatchContact

Node	Description	Type
Account	Account name of contact.	String
Birth Date	Contact's birth date.	String
Phone	Contact's phone number.	String
City	Contact's city of residence.	String
Country	Contact's country of residence.	String
Email Address	Contact's email address.	String
First Name	Contact's first name.	String
Home Phone #	Contact's home phone number.	String
Last Name	Contact's last name.	String
Middle Name	Contact's middle name.	String
Primary Postal Code	Contact's primary postal code.	String
Social Security Number	Contact's social security number.	String
State	Contact's state of residence.	String
Street Address	Contact's street address.	String
Work Phone #	Contact's work phone number.	String

Response Message Description: MktgDeduplicationServiceMatchContact

For a description of this response message, see [Table 805](#).

Table 805. Response Message Description: MktgDeduplicationServiceMatchContact

Node	Description	Type
HasMatch	Output String as "hasMatch" or "hasNoMatch".	String
Match Info	Score of the match and row id of the record matched.	Integration Object

MktgImportDeduplicationService Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 806](#).

Table 806. MktgImportDeduplicationService Data Object

Siebel Repository Name	External Name
Mktg Deduplication	Mktg Deduplication

Example Package for MktgDeduplicationService

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request (MatchAccount)

See the following file to view the sample code:

... \MktgDeduplicationService\MatchAccount_request.xml

Response (MatchAccount)

See the following file to view the sample code:

... \MktgDeduplicationService\MatchAccount_response.xml

Request (MatchOpportunity)

See the following file to view the sample code:

... \MktgDeduplicationService\MatchOpportunity_request.xml

Response (MatchOpportunity)

See the following file to view the sample code:

... \MktgDeduplicationService\MatchOpportunity_response.xml

Request (MatchProspect)

See the following file to view the sample code:

... \MktgDeduplicationService\MatchProspect_request.xml

Response (MatchProspect)

See the following file to view the sample code:

... \MktgDeduplicationService\MatchProspect_response.xml

Request (MatchContact)

See the following file to view the sample code:

```
... \MktgDeduplicationService\MatchContact_request.xml
```

Response (MatchContact)

See the following file to view the sample code:

```
... \MktgDeduplicationService\MatchContact_response.xml
```

Interface Description (WSDL) for Mktg Deduplication Service

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \MktgDeduplicationService\MktgDedup.wsdl
```

MktgImportService

This Web service is used for all the imports into the Siebel Marketing application such as Leads, Contacts, Prospects and so on.

Mktg Import Service Operations

For a list of operations associated with this Web service, see [Table 807](#).

Table 807. Mktg Import Service Operations

Node	Description
MktgImportServiceInvokeImportJob	Schedules various import processes for Marketing.

Request Message Description: MktgImportServiceInvokeImportJob

This method gets the details of the records from the business component Invoke Import Jobs and schedules the import process. For a description of this request message, see [Table 808](#).

Table 808. Request Message Description: MktgImportServiceInvokeImportJob

Node	Description	Type
ImportJobParams	Required. An instance of the integration object Import Job Integration Object.	Integration Object

Response Message Description: MktgImportServiceInvokeImportJob

For a description of this response message, see [Table 809](#).

Table 809. Response Message Description: MktgImportServiceInvokeImportJob

Node	Description	Type
ErrorCode	Error code values are OK or NOTOK.	String
Error Message	Error message (if any)	String

Mktg Import Service Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 810](#).

Table 810. Mktg Import Service Service Object

Name	Boundary Object Type	Class
Mktg System Task Service	Business Service	CSSSystemTaskService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 811](#).

Table 811. Mktg Import Service Data Object

Siebel Repository Name	External Name
Import Job Integration Object	Import Job Integration Object

Example Package for MktgImportService

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
...\MktgImportService\MktgImportServiceInvokeImportJob_request.xml
```

Response

See the following file to view the sample code:

...\MktgImportService\MktgImportServiceInvokeImportJob_response.xml

Interface Description (WSDL) for Mktg Import Service

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

...\MktgImportService\MktgImportService.wsdl

NetworkOrderEntry

Use this Web service to access network assets, as well as related attributes, attached files, and open orders. Additionally, use this Web service to validate a network based on product rules and return projected assets for a network.

NetworkOrderEntry Operations

For a list of operations associated with this Web service, see [Table 812](#).

Table 812. NetworkOrderEntry Operations

Name	Description
GetNetworkAssets	Returns the network asset based on the asset ID.
GetNetworkAssetAttributes	Returns the attribute of a network asset regardless of whether the attribute is a network, network node, or network connection.
GetNetworkAssetAttachments	Returns the file attachment for a network asset.
GetOpenNetworkOrders	Returns the open order line items for a network asset.
ValidateNetworkOrder	Validates a network based on product rules. If the network is invalid, then an error message is returned.
QueryProjectedNetworkAsset	Returns the projected asset for a network.

Common Request Message Description

The service has six operations. They do not share a common request message format.

Common Response Message Description

The service has six operations. They do not share a common response message format.

NetworkOrderEntry Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 813](#).

Table 813. NetworkOrderEntry Service Object

Name	Boundary Object Type	Class (if BusService)
VORD NOE Complex Data Service	Business Service	CSSVORDWebService
VORD NOE Simple Data Service	Business Service	CSSVORDWebService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 814](#).

Table 814. NetworkOrderEntry Data Object

Siebel Repository Name	External Name	Business Service
VORD NOE Network Assets	VORD NOE Asset Attributes	VORD NOE Simple Data Service
VORD NOE Asset Attributes	VORD NOE Asset Attributes	VORD NOE Simple Data Service
VORD NOE Network Attachments	VORD Network Asset	VORD NOE Simple Data Service
VORD NOE Network Open Order Line Items	VORD Network Asset	VORD NOE Simple Data Service
VORD NOE Network Validation Rule	VORD Network Validation Rule	VORD NOE Complex Data Service
VORD NOE Projected Asset	VORD NOE Projected Asset	VORD NOE Complex Data Service

Methods

For a description of methods for this Web service, see [Table 815](#).

Table 815. NetworkOrderEntry Methods

Operation	Business Service	Method
GetNetworkAssets	VORD NOE Simple Data Service	GetNetworkAssets
GetNetworkAssetAttributes	VORD NOE Simple Data Service	GetNetworkAssetAttributes
GetNetworkAssetAttachments	VORD NOE Simple Data Service	GetNetworkAssetAttachments
GetOpenNetworkOrders	VORD NOE Simple Data Service	GetOpenNetworkOrders
ValidateNetworkOrder	VORD NOE Complex Data Service	ValidateNetworkOrder
QueryProjectedNetworkAsset	VORD NOE Complex Data Service	QueryProjectedNetworkAsset

OrderDetailWebService

Use this Web service to query orders based on search criteria, and to retrieve details from a particular order. Details include payments, approvals, shipping, and billing charges, and tracked order shipment details. Additionally, you can copy current order lines to a cart, or cancel an order.

OrderDetailWebService Operations

For a list of operations associated with this Web service, see [Table 816](#).

Table 816. OrderDetailWebService Operations

Name	Description
OrderDetailQueryPage	Performs query operations based on the view criteria and the search specifications set on the PDS Order Detail integration object as the input. This operation is used for querying order details including the payment, approvals, and shipping, and billing details.
OrderDetailUpdate	Performs update operations on the PDS Order Detail integration object as the input. This operation is used for editing the details of an order such as copying lines of the current order or cancelling an order.

Request Message Description: OrderDetailQueryPage

Based on the view criteria and search specification set on the integration object, the order query can query the order header, line details of the order, approvals, payment, shipping, billing and shipment details. For a description of this request message, see [Table 817](#).

Table 817. Request Message Description: OrderDetailQueryPage

Node	Description	Type
OrderDetailQueryPage_Input	The method arguments are Orders IO with query parameters set, Language Mode (value is LDC) and viewMode (All).	Integration Object

Response Message Description: OrderDetailQueryPage

Based on the view criteria and search specification set on the integration object, information about order header, line details of the order, approvals, payment, shipping, billing and shipment details is returned in the response. For a description of this response message, see [Table 818](#).

Table 818. Response Message Description: OrderDetailQueryPage

Node	Description	Type
OrderDetailQueryPage_Output	The retrieved data for the query set on the view criteria and search specification.	Integration Object

Request Message Description: OrderDetailUpdate

For a description of this request message, see [Table 819](#).

Table 819. Request Message Description: OrderDetailUpdate

Node	Description	Type
OrderDetailUpdate_Input	The method arguments are Orders IO with parameters set, Language Mode (value is LDC) and viewMode (All).	Integration Object

Response Message Description: OrderDetailUpdate

For a description of this response message, see [Table 820](#).

Table 820. Response Message Description: OrderDetailUpdate

Node	Description	Type
OrderDetailUpdate_Output	The retrieved data for the update operation performed.	Integration Object

OrderDetailWebService Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network. This Web service makes available the EAI UI Business Service PDS Order Detail, which provides update and query operations on the integration object PDS Order Detail.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 821](#).

Table 821. OrderDetailWebService Service Object

Name	Boundary Object Type	Class
PDS Order Detail	Integration Object	CSSEAIUIDataService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 822](#).

Table 822. OrderDetailWebService Data Object

Siebel Repository Name	External Name
PDS Order Detail	PDS Simplified Order

Example Package for OrderDetailWebService

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

... \OrderDetailWebService\OrderDetailWebService_request.xml

Response

See the following file to view the sample code:

... \OrderDetailWebService\OrderDetailWebService_response.xml

Interface Description (WSDL) for OrderDetailWebService

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \OrderDetailWebService\OrderDetail.wsdl

PaymentAuthorizationSalesOrderSiebelReqABCImpl

Use this Web service to check whether this payment record is valid for the customer

PaymentAuthorizationSalesOrderSiebelReqABCImpl Operations

For a list of operations associated with this Web service, see [Table 823](#).

Table 823. PaymentAuthorizationSalesOrderSiebelReqABCImpl Operations

Name	Description
PaymentAuthorization	Checks for the validity of the payment record.

Request Message Description: PaymentAuthorization

For a description of this request message, see [Table 824](#).

Table 824. Request Message Description: PaymentAuthorization

Node	Description	Type
PaymentAuthorizationSalesOrderReqMsg:ListOfSWIOrderIO	Optional	Hierarchy
CustomHeaderContext	Optional	Hierarchy

Response Message Description: PaymentAuthorization

For a description of this response message, see [Table 825](#).

Table 825. Response Message Description: PaymentAuthorization

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
PaymentAuthorizationSalesOrderRespMsg:ListOfSWIOrderIO	Optional	Hierarchy
XMLHierarchyOutput	Optional	Hierarchy
faultactor	Optional	String
faultcode	Optional	String
faultstring	Optional	String
SiebelFaultMsg:Fault	Optional	Integration Object

PaymentAuthorizationSalesOrderSiebelReqABCImpl Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 826](#).

Table 826. PaymentAuthorizationSalesOrderSiebelReqABCImpl Service Object

Siebel Repository Name	Boundary Object Type	Class
SWISendPaymentAuthorization	Workflow	Not applicable

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 827](#).

Table 827. PaymentAuthorizationSalesOrderSiebelReqABCImpl Data Object

Siebel Repository Name	External Name
SWIOrderIO	SWIOrderIO
Fault	Fault

Methods

For a description of the methods for this Web service, see [Table 828](#).

Table 828. PaymentAuthorizationSalesOrderSiebelReqABCImpl Methods

Operation	Method
PaymentAuthorization	PaymentAuthorization

Interface Description (WSDL) for PaymentAuthorizationSalesOrderSiebelReqABCImpl

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \PaymentAuthorizationSalesOrdersSiebelReqABCImpl \PaymentAuthorizationSalesOrdersSiebelReqABCImpl.wsd1

PaymentSiebelCommsReqABCS

Use this Web service to query for invoice details in the external Oracle Communications Billing and Revenue Management application that will be displayed on a billing profile in the Billing user interface.

PaymentSiebelCommsReqABCS Operations

For a list of operations associated with this Web service, see [Table 829](#).

Table 829. PaymentSiebelCommsReqABCS Operations

Name	Description
QueryPayment	Queries for payments on a billing profile in the Siebel Communications Billing UI
SearchPayment	Searches for payments on a billing profile in the Siebel Communications Billing UI
CreatePayment	Creates payments on a billing profile in the Siebel Communications Billing UI
CreateInvoicePayment	Creates payments on a bill in the Siebel Communications Billing UI
QueryInvoicePayment	Queries for payments on a bill in the Siebel Communications Billing UI

Request Message Description: QueryPayment

For a description of this request message, see [Table 830](#).

Table 830. Request Message Description: QueryPayment

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
QueryPaymentReqMsg:ListOfCmuRequestBillingProfileIo	Optional	Integration Object

Response Message Description: QueryPayment

For a description of this response message, see [Table 831](#).

Table 831. Response Message Description: QueryPayment

Node	Description	Type
QueryPaymentRespMsg:ListOfCmuResponseBillingProfilePaymentsIo	Optional	Integration Object

Request Message Description: SearchPayment

For a description of this request message, see [Table 832](#).

Table 832. Request Message Description: SearchPayment

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
SearchPaymentReqMsg:ListOfCmuRequestBillingProfilePaymentsSearchIo	Optional	Integration Object

Response Message Description: SearchPayment

For a description of this response message, see [Table 833](#).

Table 833. Response Message Description: SearchPayment

Node	Description	Type
SearchPaymentRespMsg:ListOfCmuResponseBillingProfilePaymentsIo	Optional	Integration Object

Request Message Description: CreatePayment

For a description of this request message, see [Table 834](#).

Table 834. Request Message Description: CreatePayment

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
CreatePaymentReqMsg:ListOfCmuRequestNewPaymentCaptureIo	Optional	Integration Object

Response Message Description: CreatePayment

For a description of this response message, see [Table 835](#).

Table 835. Response Message Description: CreatePayment

Node	Description	Type
CreatePaymentRespMsg:ListOfCmuResponseNewPaymentsIo	Optional	Integration Object

Request Message Description: CreateInvoicePayment

For a description of this request message, see [Table 836](#).

Table 836. Request Message Description: CreateInvoicePayment

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
CreateInvoicePaymentReqMsg:ListOfCmuRequestNewPaymentCaptureInvoiceIo	Optional	Integration Object

Response Message Description: CreateInvoicePayment

For a description of this response message, see [Table 837](#).

Table 837. Response Message Description: CreateInvoicePayment

Node	Description	Type
CreateInvoicePaymentRespMsg:ListOfCmuResponseNewPaymentInvoiceIo	Optional	Integration Object

Request Message Description: QueryInvoicePayment

For a description of this request message, see [Table 838](#).

Table 838. Request Message Description: QueryInvoicePayment

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
QueryInvoicePaymentReqMsg:ListOfCmuRequestBilledUsageIo	Optional	Integration Object

Response Message Description: QueryInvoicePayment

For a description of this response message, see [Table 839](#).

Table 839. Response Message Description: QueryInvoicePayment

Node	Description	Type
QueryInvoicePaymentRespMsg:ListOfCmuResponseBilledUsgae PaymentsIo	Optional	Integration Object

PaymentSiebelCommsReqABCS Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 840](#).

Table 840. PaymentSiebelCommsReqABCS Service Object

Name	Boundary Object Type	Class
PaymentSiebelCommsReqABCS	Business Service	CSSWSOutboundDispatcher

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 841](#).

Table 841. PaymentSiebelCommsReqABCS Data Object

Siebel Repository Name	External Name
CMU Response Billed Usage Payments IO	Account
CMU Request Billed Usage IO	Account
CMU Request Billing Profile IO	Account
CMU Response Billing Profile Payments IO	Account
CMU Request Billing Profile Payments Search IO	Account

Table 841. PaymentSiebelCommsReqABCS Data Object

Siebel Repository Name	External Name
CMU Response Billing Profile Payments IO	Account
CMU Request New Payment Capture IO	Account
CMU Response New Payments IO	Account
CMU Request New Payment Capture Invoice IO	Account
CMU Response New Payment Invoice IO	Account

Methods

For a description of the methods for this Web service, see [Table 842](#).

Table 842. PaymentSiebelCommsReqABCS Methods

Operation	Method
QueryPayment	QueryPayment
SearchPayment	SearchPayment
CreatePayment	CreatePayment
CreateInvoicePayment	CreateInvoicePayment
QueryInvoicePayment	QueryInvoicePayment

Example Package for PaymentSiebelCommsReqABCS

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

... \PaymentSiebelCommsReqABCS \Request.xml

Response

See the following file to view the sample code:

... \PaymentSiebelCommsReqABCS \Response.xml

Interface Description (WSDL) for PaymentSiebelCommsReqABCS

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \PaymentsSiebelCommsReqABCS\WSDL

PDSOrderHeader

Use this Web service to get header information for specific open orders.

PDSOrderHeader Operations

For a list of operations associated with this Web service, see [Table 843](#).

Table 843. PDSOrderHeader Operations

Name	Description
PDSOrderHeaderQueryPage	Get the header information of open orders for a specific asset.

Request Message Description: PDSOrderHeaderQueryPage

For a description of this request message, see [Table 844](#).

Table 844. Request Message Description: PDSOrderHeaderQueryPage

Node	Description	Type
PDSOrderHeaderQueryPage_Input	The request message includes the search criteria for order status and asset integration ID.	ComplexType

Response Message Description: PDSOrderHeaderQueryPage

For a description of this response message, see [Table 845](#).

Table 845. Response Message Description: PDSOrderHeaderQueryPage

Node	Description	Type
PDSOrderHeaderQueryPage_Output	The response message includes list of order headers matching the search criteria.	ComplexType

Example Package for PDSOrderHeader

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

... \PDSOrderHeader\PDSOrderHeader_request.xml

Response

See the following file to view the sample code:

```
... \PDSOrderHeader\PDSOrderHeader_response.xml
```

Interface Description (WSDL) for PDSOrderHeader

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \PDSOrderHeader\PDSOrderHeader.wsdl
```

PriceListsWS

Use this Web service to obtain price lists based on defined search specifications.

PriceListsWS Operations

For a list of operations associated with this Web service, see [Table 846](#).

Table 846. PriceListsWS Operations

Node	Description
GetPriceLists	Get all the price lists based on search spec.

Request Message Description: GetPriceLists

For a description of this request message, see [Table 847](#).

Table 847. Request Message Description: GetPriceLists

Node	Description	Type
GetPriceLists_Input	Request message includes the search specification.	ComplexType

Response Message Description: GetPriceLists

For a description of this response message, see [Table 848](#).

Table 848. Response Message Description: GetPriceLists

Node	Description	Type
GetPriceLists_Output	Response message includes the price lists matching the search specification.	ComplexType

Example Package for PriceListsWS

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
...\PriceListsWS\PriceListsWS_request.xml
```

Response

See the following file to view the sample code:

```
...\PriceListsWS\PriceListsWS_response.xml
```

Interface Description (WSDL) for PriceListsWS

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
...\PriceListsWS\PriceListsWS.wsdl
```

ProcessSalesOrderSiebelJMSProducer

Use this Web service to submit a sales order from the Siebel CRM application to the billing application and to create a customer account, if needed, in the billing application.

The response message returns only an acknowledgement message and not data.

ProcessSalesOrderSiebelJMSProducer Operations

For a list of operations associated with this Web service, see [Table 849](#).

Table 849. ProcessSalesOrderSiebelJMSProducer Operations

Operation Name	Description
Process	Submits a sales order to the billing application and creates a customer account, if needed, in the billing application.

Request Message Description: Process

For a description of this request message, see [Table 850](#).

Table 850. Request Message Description: Process

Node	Description
Order	The details of the header for the order.
OrderItem	The details of the order item.
OrderItemXA	The properties of the order item.

ProcessSalesOrderSiebelJMSProducer Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 851](#).

Table 851. ProcessSalesOrderSiebelJMSProducer Service Object

Name	Boundary Object Type	Class (If Business Service)
ProcessSalesOrderSiebelJMSProducer	Business Service	CSSWSOutboundDispatcher

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 852](#).

Table 852. ProcessSalesOrderSiebelJMSProducer Data Object

Siebel Repository Name	External Name
PDS Order - No Hierarchy	PDS Simplified Order

Methods

For a description of the methods for this Web service, see [Table 853](#).

Table 853. ProcessSalesOrderSiebelJMSProducer Methods

Operation	Method
process	[BS: ProcessSalesOrderSiebelJMSProducer].process

Example Package for ProcessSalesOrderSiebelJMSProducer

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \ProcessSalesOrderSiebelJMSProducer\ProcessSalesOrderSiebelJMSProducerRequest
Message.xml
```

Response

See the following file to view the sample code:

```
... \ProcessSalesOrderSiebelJMSProducer\ProcessSalesOrderSiebelJMSProducerResponse
Message.xml
```

Interface Description (WSDL) for ProcessSalesOrderSiebelJMSProducer

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \ProcessSalesOrderSiebelJMSProducer\ProcessSalesOrderSiebelJMSProducer.xml
```

Product Configurator Web Service

NOTE: This version of Siebel Product Configurator Web Service is available only for implementations of Siebel CRM version 8.1 and later. To use the Siebel Configurator Web service with Siebel CRM version 8.0, see version 8.0 of *Siebel CRM Web Services Reference*.

The Web service enables queries on information contained within the product model, such as relationships, attributes, linked items, resources, UI groups. The service also allows you to configure a product and perform multiple batch requests.

Product Configurator Web Service Operations

For a list of operations associated with this Web service, see [Table 854](#).

Table 854. Configurator Web service operations

Name	Description
GetCfgObjectStructure	Retrieves product relationships, attributes, linked items and resources.
GetCfgObjectGroupItems	Retrieves the Product UI definition, UI group and group items.
GetCfgObjectDefaultGroup Items	Retrieves Default Product Group Items (group items will be based on all relationships, attributes, linked items and resources).
BeginConfiguration	Enables customization of products stored in the Siebel database. Initializes the configurator session with a quote instance and product model.

Table 854. Configurator Web service operations

Name	Description
UpdateConfiguration	Executes operations on the quote instance initialized in BeginConfiguration.
EndConfiguration	Release server resources used during the Begin or Update Configuration operation.

Request Message Description: GetCfgObjectStructure

GetCfgObjectStructure has the same request and response message.

GetCfgObjectGroupItems has the same request and response message.

GetCfgObjectDefaultGroupItems request and response message is the same as GetCfgObjectGroupItems. The Object’s direct child properties are ignored as well those of UIOption, Responsibilities, and Group. Only the GroupItem child is looked at and returned (others are copied to the Response message). GroupItem behavior is similar to that of GetCfgObjectGroupItems.

For a description of this request message, see [Table 855](#).

Table 855. Request Message: GetCfgObjectStructure

Node	Description
WebChannelObjStructure	Required. This structure identified the objects that will be queries as well the data that will be returned about the objects.
Object	Required. One or more must be specified.
Name	Required. Name of an object (product or class). Either Name or Id is required.
Id	Required. Id of an object (product or class). Either Name or Id is required.
ObjectType	Required. Either Product or Class.
ParentClassId	Class Id of the parent.
DisplayName	Display name.
Description	Description.
Attribute	Zero or more (only those child objects that are specified will be queried for).
Name	Name of attribute. If empty, then all attributes are returned.
LocalType	Local type.
InternalType	Internal type.
OrigId	Internal Id.
DisplayName	Display name.
Hidden	Hidden flag.

Table 855. Request Message: GetCfgObjectStructure

Node	Description
Required	Required flag.
ReadOnly	Read Only flag.
ValidationSpec	Validation specification.
UnitOfMeasure	Unit of measure.
Description	Description.
AttributeDomain	Zero or more.
LocalValue	Local value.
InternalValue	Internal value.
AttributeDomainDecoration	Zero or more. Attribute domain specific properties name value pairs.
Name	Name of attribute.
Value	Value of attribute.
AttributeDefaultValue	Default value of the attribute. Only one of the value types will be populated depending on the type of the value.
DisplayValue	Display value.
String	String value.
Number	Number value.
Integer	Integer value.
Date	Date value.
Boolean	Boolean value.
AttributeRejectedValue	Rejected value of the attribute. Only one of the value types will be populated depending on the type of the value.
DisplayValue	Display value.
String	String value.
Number	Number value.
Integer	Integer value.
Date	Date value.
Boolean	Boolean value.
AttributeDecoration	Zero or more.
Name	Attribute properties name.
Value	Value pairs.

Table 855. Request Message: GetCfgObjectStructure

Node	Description
Relationship	Zero or more (only those child objects that are specified will be queried for).
Name	Name of relationship. If Name and or Id is specified, then only that particular relationship will be returned. If both are empty, then all relationships are returned.
Id	Id of relationship. If Name and or Id is specified, then only that particular relationship will be returned. If both are empty, then all relationships will be returned.
DisplayName	Display name.
ClassName	Class name.
ClassId	Class Id.
DefaultProductId	Default product Id.
DefaultCardinality	Default cardinality.
MinimumCardinality	Minimum cardinality.
MaximumCardinality	Maximum cardinality.
RelationshipDomain	Zero or more.
Name	Name of product. If Name and or Id is specified, then only that particular relationship domain will be returned. If both are empty, then all relationship domain products will be returned.
Id	Id of product. If Name and or Id is specified, then only that particular relationship domain will be returned. If both are empty, then all relationship domain products will be returned.
DisplayName	Display Name.
OrigId	Originating Id.
Description	Description.
RelationshipDomainDecoration	Zero or more.
Name	Relationship domain specific properties name.
Value	Value pairs.
RelationshipDecoration	Zero or more.
Name	Relationship properties name
Value	Value pairs.
LinkedItem	Zero or more (only those child objects that are specified will be queried for).
Name	Name of linked item.

Table 855. Request Message: GetCfgObjectStructure

Node	Description
Id	Id of linked item. If Name and or Id is specified, then only that particular linked item will be returned. If both are empty, then all linked items will be returned.
DisplayName	Display name.
VariableName	Variable Name.
SortSpec	Sort specification.
SearchSpec	Search specification.
NeedsExecution	The Needs Execution flag used for business component-based queries.
Expression	Expression.
DefaultValue	Default value.
BusinessObject	Business object for business component based query.
BusinessComponent	Business component for business component based query.
FieldName	Field name in the business component.
Active	Active flag.
LinkedItemDecoration	Linked Item properties.
Name	Name value.
Value	Pairs.
Resource	Zero or more (only those child objects that are specified will be queried for).
Name	Name of resource. If Name and or Id is specified, then only that particular resource will be returned. If both are empty, then all resources are returned.
Id	Id of resource. If Name and or Id is specified, then only that particular resource will be returned. If both are empty, then all resources are returned.
DisplayName	Display name.
ResourceDecoration	Resource properties.
Name	Name value.
Value	Pairs.
ObjectDecoration	Object properties.
Name	Name value.
Value	Pairs.

Request Message Description: GetCfgObjectGroupItems, GetCfgObjectDefaultGroupItems

For a description of this request message, see [Table 856](#).

Table 856. Request Message: GetCfgObjectGroupItems, GetCfgObjectDefaultGroupItems

Node	Description
WebChannelObjGroupItems	Required. This structure identified the objects that will be queries as well the data that will be returned about the objects.
Object	Required. One or more must be specified.
Name	Required. Name of Object (product or class). Either Name or Id is required.
Id	Required. Id of Object (product or class). Either Name or Id is required.
ObjectType	Required. Either Product or Class.
ParentClassId	Class Id of the parent.
DisplayName	Display name.
Description	Description.
UIOption	Zero or more.
Name	Name of UI option. If Name and or Id is specified, then only that particular UI option will be returned. If both are empty, then all UI options will be returned.
Id	Id of UI option. If Name and or Id is specified, then only that particular UI option will be returned. If both are empty, then all UI options will be returned.
Type	Type.
DisplayName	Display name.
Sequence	Sequence.
BaseTheme	Base theme.
ProductTheme	Product theme.
Responsibility	Zero or more.
Name	Name of responsibility. If Name and or Id is specified, then only that particular responsibility will be returned. If both are empty, then all responsibilities will be returned.
Id	Id of responsibility. If Name and or Id is specified, then only that particular responsibility will be returned. If both are empty, then all responsibilities will be returned.
Group	Zero or more.

Table 856. Request Message: GetCfgObjectGroupItems, GetCfgObjectDefaultGroupItems

Node	Description
Name	Name of group. If Name and or Id is specified, then only that particular group will be returned. If both are empty, then all groups will be returned.
Id	Id of Group. If Name value and or Id value is specified, then only that particular group will be returned. If both are empty, then all groups will be returned.
DisplayName	Display name.
Sequence	Sequence.
GroupTheme	Group theme.
Description	Description.
GroupItem	Zero or more.
Id	Id of Group Item. If Id and or Type is specified, then only that particular group item will be returned. If both are empty, then all group items will be returned.
Type	Type of Group Item (Relationship, Attribute, LinkedItem, or Resource). If Id and or Type is specified, then only that particular group item will be returned. If both are empty, then all group items will be returned.
Sequence	Sequence.
GroupItemTheme	Group item theme.
Attribute	An attribute child object of GetCfgObjectStructure request message.
Relationship	A relationship child object of GetCfgObjectStructure request message.
LinkedItem	A LinkedItem child object of GetCfgObjectStructure request message.
Resource	Refer to Resource child object of GetCfgObjectStructure request message.
GroupDecoration	Group properties.
Name	Name value.
Value	Pairs.
Object Decoration	Object properties name value pairs.

Request Message Description: BeginConfiguration

For a description of this request message, see [Table 857](#).

Table 857. Request Message: BeginConfiguration

Node	Description
BeginConfiguration_Input	Required.
InitInstanceOperation	Required. The operation type for BeginConfiguration session.
	LOAD. This will load the hierarchy object from the db. HeaderId and RootId are required. IntegrationObjectName is needed to determine which table to query and what the structure of the hierarchy is.
	DEFAULT. This will load the hierarchy object from the db and create new line item for a product with its default instance. HeaderId and ProductId are required. IntegrationObjectName is needed to determine which table to query and what the structure of the hierarchy is.
	SET. This will load the hierarchy object from the ListOfQuote parameter (PDS Quote integration object). RootId is required to determine the root line item to use in this session.
	ADD. This will add a new line item to the hierarchy object from the ListOfQuote parameter (PDS Quote integration object). ProductId is required.
HeaderId	Required for InitInstanceOperation of LOAD / DEFAULT. Row Id of the Header.
RootId	Required for InitInstanceOperation of LOAD / SET. Row Id for the root line item.
ProductId	Required for InitInstanceOperation of DEFAULT / ADD. Product Id for the root line item.
ListOfQuote	Required for InitInstanceOperation of SET / ADD. Hierarchy object in PDS Quote integration object format.
ListOfData	List of products, attributes, or relationships on which user requires domain information (with exclusions) in CfgInteractData integration object format.
ProductData	Product type.
Item	Item name.
IntegrationId	Integration Id of the line item. If IntegrationId specified, then only this line item and its sub line items are looked at. ProductId is optional. If ProductId is also specified, then it should match IntegrationId. If IntegrationId and ProductId are not specified, then the root line item is looked at.

Table 857. Request Message: BeginConfiguration

Node	Description
ProductId	Product Id of the line item. If IntegrationId specified, then only this line item and its sub line items are looked at. ProductId is optional. If ProductId is also specified, then that value should match the IntegrationId. If IntegrationId and ProductId are not specified, then the root line item is considered.
Name	Name of the product.
Quantity	Quantity.
RelationshipName	Relationship name. For sub line items, RelationshipName can be specified to limit the search to a particular relationship.
RootIntegrationId	Integration Id of the root line item.
PortId	Relationship ID.
ParentProductId	Parent Product ID.
ParentIntegrationId	Parent Integration ID.
CanDrilldown	Can drilldown flag. Used to indicate whether the line item is a customizable product.
ListPrice	List price.
NRCCxTotal	Non-recurring total price - only set on the root line item.
MRCCxTotal	Recurring total price - only set on the root line item.
CurrentPrice	Current price of the item after all the discounts have been factored in.
ExchangeDate	Exchange date of the pricing field values.
CurrencyCode	Currency code of the pricing field values.
HasGenericsFlag	Has Generics flag. Used to indicate whether the line item is incomplete.
EligibilityStatus	Eligibility status.
EligibilityReason	Eligibility reason.
Explanation	Explanation, if required.
ExplanationText	Text of explanation.
Relationship	Zero or more. List of relationships on which information is required.
Name	Name of relationship to query for. If empty, then all relationships are returned.
Id	Id. Always returned whether specified in the request or not.

Table 857. Request Message: BeginConfiguration

Node	Description
Request Type	<p>Indicates the type of the information that will be calculated for this relationship. Possible values include:</p> <ul style="list-style-type: none"> ■ SelectionInfo - Only current line items for this relationship will be outputted. ■ DomainInfo - Only the possible domain items for this relationship will be outputted. ■ Any other values results in both of the above information being calculated and outputted.
DomainItem	Zero or more. Domain items of the relationship. Always returned whether specified in Request or not.
Name	Name of domain item.
Id	Id of domain item.
ListPrice	List price.
ExchangeDate	Exchange date of the pricing field values.
CurrencyCode	Currency code of the pricing field values.
PriceType	Indicated the type of list price: One-time or Recurring.
CanDrilldown	Can Drilldown flag. Used to indicate whether the line item is a customizable product.
Excluded	Excluded flag indicates the whether this domain item is excluded by a Constraint, Eligibility & Compatibility rule, or Promotion.
Attribute	Zero or more. List of attributes on which information is required.
Name	Name of attribute to query for. If empty, then all attributes are returned.
ValueType	Type of attribute. Always returned whether specified in the request or not.
AttributeValue	Zero or more. List of attribute values. Always returned whether specified in the request or not.
DisplayValue	Display value.
StringValue	Value displayed in a string.
IntegerValue	Value displayed as integer.
NumberValue	Value displayed as number.
BooleanValue	Value displayed in Boolean format.
DateTimeValue	Date and time value.
Selected	Selected flag indicates whether this value is selected.

Table 857. Request Message: BeginConfiguration

Node	Description
Excluded	Excluded flag indicates whether this value is excluded by a Constraint, Eligibility & Compatibility rule or Promotion.
Item	Zero or more. Same recursive structure as that defined above.
ListOfLinkedItems	Linked Items.
LinkedItems	Linked Items.
LinkedItemValue	One or more.
Name	Name of linked item.
ValueType	Type of value.
StatusText	Details on the error if any.
ConflictResolution	Values are Proceed or Undo. This indicates whether a Proceed or Undo was done on the conflicts and also whether there were any other violations that resulted in an Undo (like Promotion or Cardinality).
Messages	Zero or one. List of messages.
MessageType	Zero or more.
MessageSource	Source of the messages (Eligibility, Promotion, Cardinality, Proceed Actions and so on).
Message	Message text.

Response Message Description: Begin Configuration

GetCfgObjectStructure has the same request and response message. For more information, see [Table 857](#).

GetCfgObjectGroupItems and GetCfgObjectDefaultGroupItems have the same request and response messages. See the response message description for Begin Configuration for details.

For a description of this response message, see [Table 858](#).

Table 858. Response Message Description: Begin Configuration

Node	Description
BeginConfiguration_Output	Required.
Error_spcCode	Error code if error occurred.
Error_spcMessage	Error message if error occurred.
RootId	New item root Id.
RootIntegrationId	New item root Integration Id.
ListOfQuote	Quote instance if ReturnFullInstance input parameter was set to Y. See BeginConfiguration Request Message for details.

Table 858. Response Message Description: Begin Configuration

Node	Description
ListOfData	The domain information about products, attributes, and relationships as well current selections for the attributes, or relationships that was requested in the request message.
ListOfStatus	This indicates whether the request was successful or not and contains messages to be displayed.
Status	Required
StatusCode	Success, Warning, or Error. If the StatusCode is Success, then the operation was successful. If the StatusCode is Warning, then there were conflicts, messages are present in ListOfMessage, that were automatically resolved. If the StatusCode is Error, then there were conflicts, messages are present in ListOfMessage, that could not be resolved, and further requests to this session will not be honored.

Request Message Description: UpdateConfiguration

For a description of this request message, see [Table 859](#).

Table 859. Request Message Description: UpdateConfiguration

Node	Description
UpdateConfiguration_Input	Required.
ConflictAutoResolve	Proceed or Undo. If set to Proceed, then all conflicts are auto resolved. If set to Undo, then any conflict will result in an Undo of the entire batch.
FinishInstanceInFlag	If set Y, then FinishIt is called.
SaveInstanceInFlag	If set Y, then the instance is saved to the database.
RepriceInstanceInFlag	If set Y, then a reprice is called.
VerifyInstanceInFlag	If set Y, then verify the instance is called.
ListOfData	Same as ListOfData in BeginConfiguration Request Message.
ListOfRequest	List of Requests that will be executed on the product instance.
Requests	Requests.
Request	Zero or more.
Type	Type of request (AddItem, RemoveItem, SetItemQuantity, SetAttribute, ReplaceItem).
Item	Zero or more requests.
AddProductId	Add product Id for AddItem, ReplaceItem.
Quantity	Quantity.

Table 859. Request Message Description: UpdateConfiguration

Node	Description
RelationshipId	Relationship Id which contains the new product for AddItem, ReplaceItem.
IntegrationId	Integration Id on which the operation will be performed.
Attribute	Zero or more SetAttribute request details.
Name	Name or attribute.
ValueType	Type of value.
AttributeValue	Zero or more.
DisplayValue	New display value of attribute
String	Value displayed in a string.
Number	Value displayed as number.
Integer	Value displayed as integer.
Date	Date.
Boolean	Value displayed in Boolean format.

Response Message Description: UpdateConfiguration

For a description of this response message, see [Table 860](#).

Table 860. Response Message Description: UpdateConfiguration

Node	Description
UpdateConfiguration_Output	Required.
Error_spcCode	Error Code if error occurred.
Error_spcMessage	Error Message if error occurred.
FinishConfigurationOutFlag	Y or N. Indicates whether Finish Configuration was performed. It might not be performed if there were some errors.
RepriceOutFlag	Y or N. Indicates whether Reprice was done. It might not be performed if there were errors.
SaveInstanceOutFlag	Y or N. Indicates whether Save Instance was done. It might not be performed if there were conflicts.
VerifyOutFlag	Y or N. Indicates whether Verify was done. It might not be performed if there were errors.
ListOfData	The domain information about products, attributes, and relationships as well current selections for the attributes, or relationships that was requested in the request message.
ListOfStatus	This indicates whether the request was successful or not and contains messages to be displayed.

Request Message Description: EndConfiguration

For a description of this request message, see [Table 861](#).

Table 861. Request Message Description: EndConfiguration

Node	Description
EndConfiguration_Input	Required.
SaveInstanceFlag	Save instance flag.

Response Message Description: EndConfiguration

For a description of this response message, see [Table 862](#).

Table 862. Response Message Description: EndConfiguration

Node	Description
EndConfiguration_Output	Required.
Error_spcCode	Error Code if error occurred.
Error_spcMessage	Error Message if error occurred.
ListOfQuote	Quote instance.

Product Configurator Web Service Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 863](#).

Table 863. Product Configurator Service Objects

Name	Boundary Object Type	Class (if BusService)
Cfg Object Broker	Business Service	CSSCcfgObjBrokerService
ConfiguratorWebChannelBeginConfig	Workflow	Not applicable
ConfiguratorWebChannelUpdateConfig	Workflow	Not applicable
ConfiguratorWebChannelEndConfig	Workflow	Not applicable

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 864](#).

Table 864. Product Configurator Data Objects

Siebel Repository Name	External Name
CfgInteractData	ListOfData
CfgInteractRequest	ListOfRequest
CfgInteractStatus	ListOfStatus
CfgLinkedItems	ListOfLinkedItems
PDS Quote	ListOfQuote

Methods

For a description of the methods for this Web service, see [Table 865](#).

Table 865. Product Configurator Methods

Operation	Method
GetCfgObjectStructure	GetObjStructure
GetCfgObjectGroupItems	GetObjGroupItems
GetCfgObjectDefaultGroupItems	GetObjDefaultGroupItems

Example Package for Product Configurator

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request (GetObjDefaultGroupItems)

See the following file to view the sample code:

... \ProductConfigurator\GetObjDefaultGroupItems_request.xml

Response (GetObjDefaultGroupItems)

See the following file to view the sample code:

... \ProductConfigurator\GetObjDefaultGroupItems_response.xml

Request (GetObjGroupItems)

See the following file to view the sample code:

... \ProductConfigurator\GetObjGroupItems_request.xml

Response (GetObjGroupItems)

See the following file to view the sample code:

... \ProductConfigurator\GetObjGroupItems_response.xml

Request (GetObjStructure)

See the following file to view the sample code:

... \ProductConfigurator\GetObjStructure_request.xml

Response (GetObjStructure)

See the following file to view the sample code:

... \ProductConfigurator\GetObjStructure_response.xml

Interface Description (WSDL) for Product Configurator

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \ProductConfigurator\ProductConfigurator.wsdl

Product Configurator Web Service for Orders

This Web service enables queries on information contained within the product model, such as relationships, attributes, linked items, resources, and UI groups. The service also enables you to configure a product and perform multiple batch requests in the context of a sales order.

NOTE: This version of Product Configurator Web Service for Orders is available only for Siebel CRM version 8.1.1.10 and later. To use Product Configurator Web Service for Quotes with Siebel CRM version 8.0, see version 8.0 of *Siebel CRM Web Services Reference*.

Product Configurator Web Service for Orders Operations

Table 866 provides a list of the operations associated with this Web service.

Table 866. Product Configurator Web Service for Orders operations

Name	Description
GetObjStructureOrder	Retrieves the product relationships, attributes, linked items and resources.
GetObjGroupItemsOrder	Retrieves the product UI definition, UI group, and group items.

Table 866. Product Configurator Web Service for Orders operations

Name	Description
GetObjDefaultGroupItemsOrder	Retrieves the default product group items. Group items are based on all relationships, attributes, linked items and resources.
BeginConfigurationOrder	Enables customization of products stored in the Siebel database. Initializes the configurator session with an order instance and product model.
UpdateConfigurationOrder	Executes operations on the order instance initialized in BeginConfigurationOrder.
EndConfigurationOrder	Releases server resources used during the configuration of the product.

Request Message Description: GetObjStructureOrder

GetObjStructureOrder and GetObjGroupItemsOrder have the same request and response message.

GetObjDefaultGroupItemsOrder request and response message is the same as GetObjGroupItemsOrder. The Object’s direct child properties are ignored as well those of UIOption, Responsibilities, and Group. Only the GroupItem child is looked at and returned (others are copied to the Response message).

GroupItem behavior is similar to that of GetObjGroupItemsOrder.

Table 867 provides a description of the request message GetObjStructureOrder.

Table 867. Request Message: GetObjStructureOrder

Node	Description
WebChannelObjStructure	Required. This structure specifies the objects that are queried and the data that is returned about the objects.
Object	Required. Specify one or more objects.
Name	The name of the object (product or class). Either Name or Id is required.
Id	The Id of an object (product or class). Either Name or Id is required.
ObjectType	Required. The object type, either Product or Class.
ParentClassId	The class Id of the parent object.
DisplayName	The display name.
Description	The description.
Attribute	Zero or more child objects to be queried for.
Name	The name of the attribute. If this value is empty, then all attributes are returned.
LocalType	The local type.

Table 867. Request Message: GetObjStructureOrder

Node	Description
InternalType	The internal type.
OrigId	The internal Id.
DisplayName	The display name.
Hidden	The hidden flag.
Required	Required flag.
ReadOnly	Read-only flag.
ValidationSpec	The validation specification.
UnitOfMeasure	The unit of measure.
Description	The description.
AttributeDomain	Zero or more.
LocalValue	The local value.
InternalValue	The internal value.
AttributeDomainDecoration	Zero or more name value pairs of attribute-domain-specific properties.
Name	The name of the attribute.
Value	The value of the attribute.
AttributeDefaultValue	The default value of the attribute. Only one of the value types is populated depending on the type of the value.
DisplayValue	The display value.
String	A string value.
Number	A number value.
Integer	An integer value.
Date	A date value.
Boolean	A Boolean value.
AttributeRejectedValue	A rejected value of the attribute. Only one of the value types is populated depending on the type of the value.
DisplayValue	The display value.
String	A string value.
Number	A number value.
Integer	An integer value.
Date	A date value.
Boolean	A Boolean value.

Table 867. Request Message: GetObjStructureOrder

Node	Description
AttributeDecoration	Zero or more.
Name	The attribute properties name.
Value	Value pairs.
Relationship	Zero or more relationships. Only those child objects that are specified are queried for.
Name	The name of the relationship. If Name or Id is specified, then only that particular relationship is returned. If both are empty, then all relationships are returned.
Id	The Id of the relationship. If Name or Id is specified, then only that particular relationship is returned. If both are empty, then all relationships are returned.
DisplayName	The display name.
ClassName	The class name.
ClassId	The class Id.
DefaultProductId	The default product Id.
DefaultCardinality	The default cardinality.
MinimumCardinality	The minimum cardinality.
MaximumCardinality	The maximum cardinality.
RelationshipDomain	Zero or more.
Name	The name of the product. If Name or Id is specified, then only that particular relationship domain will be returned. If both are empty, then all relationship domain products will be returned.
Id	The Id of the product. If Name or Id is specified, then only that particular relationship domain are returned. If both are empty, then all relationship domain products are returned.
DisplayName	The display name.
OrigId	The originating Id.
Description	The description of the product.
RelationshipDomainDecoration	Zero or more.
Name	The name of the specific properties of the relationship domain.
Value	Value pairs.
RelationshipDecoration	Zero or more.
Name	The relationship properties name.
Value	Value pairs.

Table 867. Request Message: GetObjStructureOrder

Node	Description
LinkedItem	Zero or more linked items. Only those child objects that are specified are queried for.
Name	The name of the linked item.
Id	The Id of the linked item. If Name or Id is specified, then only that particular linked item is returned. If both are empty, then all linked items are returned.
DisplayName	The display name.
VariableName	The variable name.
SortSpec	The sort specification.
SearchSpec	The search specification.
NeedsExecution	The needs-execution flag, used for business-component-based queries.
Expression	The expression.
DefaultValue	The default value.
BusinessObject	The business object, used for business-component-based queries.
BusinessComponent	The business component, used for business-component-based queries.
FieldName	The field name in the business component.
Active	The active flag.
LinkedItemDecoration	The linked item properties.
Name	The name value.
Value	Value pairs.
Resource	Zero or more resources. Only those child objects that are specified will be queried for.
Name	The name of the resource. If Name or Id is specified, then only that particular resource is returned. If both are empty, then all resources are returned.
Id	The Id of the resource. If Name or Id is specified, then only that particular resource is returned. If both are empty, then all resources are returned.
DisplayName	The display name.
ResourceDecoration	The resource properties.
Name	The name value.

Table 867. Request Message: GetObjStructureOrder

Node	Description
Value	Value pairs.
ObjectDecoration	The object properties.
Name	The name value.
Value	Value pairs.

Request Message Description: GetObjGroupItemsOrder, GetObjDefaultGroupItemsOrder

Table 868 provides a description of the request messages GetObjGroupItemsOrder and GetObjDefaultGroupItemsOrder.

Table 868. Request Message: GetObjGroupItemsOrder, GetObjDefaultGroupItemsOrder

Node	Description
WebChannelObjGroupItems	Required. This structure identifies the objects that will be queried and the data that will be returned for the objects.
Object	Required. One or more must be specified.
Name	The name of the object (product or class). Either Name or Id is required.
Id	The Id of the object (product or class). Either Name or Id is required.
ObjectType	Required. The type of the object, either Product or Class.
ParentClassId	The class Id of the parent.
DisplayName	The display name.
Description	The description.
UIOption	Zero or more.
Name	The name of the UI option. If Name or Id is specified, then only that particular UI option will be returned. If both are empty, then all UI options will be returned.
Id	The Id of the UI option. If Name or Id is specified, then only that particular UI option will be returned. If both are empty, then all UI options will be returned.
Type	The type.
DisplayName	The display name.
Sequence	The sequence.
BaseTheme	The base theme.
ProductTheme	The product theme.
Responsibility	Zero or more.

Table 868. Request Message: GetObjGroupItemsOrder, GetObjDefaultGroupItemsOrder

Node	Description
Name	The name of the responsibility. If Name or Id is specified, only that particular responsibility will be returned. If both are empty, then all responsibilities will be returned.
Id	The Id of the responsibility. If Name or Id is specified, only that particular responsibility will be returned. If both are empty, then all responsibilities will be returned.
Group	Zero or more.
Name	The name of the group. If Name or Id is specified, then only that particular group will be returned. If both are empty, then all groups will be returned.
Id	The Id of the group. If Name value or Id value is specified, then only that particular group will be returned. If both are empty, then all groups will be returned.
DisplayName	The display name.
Sequence	The sequence.
GroupTheme	The group theme.
Description	The description.
GroupItem	Zero or more.
Id	The Id of the group item. If Id or Type is specified, then only that particular group item will be returned. If both are empty, then all group items will be returned.
Type	The type of the group item (Relationship, Attribute, LinkedItem, or Resource). If Id or Type is specified, then only that particular group item will be returned. If both are empty, then all group items will be returned.
Sequence	The sequence.
GroupItemTheme	The theme of the group item.
Attribute	An attribute child object of GetObjStructureOrder request message.
Relationship	A relationship child object of GetObjStructureOrder request message.
LinkedItem	A LinkedItem child object of GetObjStructureOrder request message.
Resource	Refer to the Resource child object of GetObjStructureOrder request message.
GroupDecoration	The group properties.
Name	The name value.

Table 868. Request Message: GetObjGroupItemsOrder, GetObjDefaultGroupItemsOrder

Node	Description
Value	Pairs.
Object Decoration	The object properties of the name value pairs.

Request Message Description: BeginConfigurationOrder

Table 869 provides a description of the request message, BeginConfigurationOrder.

Table 869. Request Message: BeginConfigurationOrder

Node	Description
BeginConfigurationOrder_Input	Required.
InitInstanceOperation	<p>Required. The operation type for the BeginConfigurationOrder session. There are the following options:</p> <ul style="list-style-type: none"> ■ Load. Loads the hierarchy object from the database. HeaderId and RootId are required. IntegrationObjectName is required to determine which table to query and what the structure of the hierarchy is. ■ Default. Load the hierarchy object from the database and creates a new line item for a product with its default instance. HeaderId and ProductId are required. IntegrationObjectName is required to determine which table to query and what the structure of the hierarchy is. ■ Set. Loads the hierarchy object from the ListOfOrder parameter (PDS Order integration object). RootId is required to determine the root line item to use in this session. ■ Add. Adds a new line item to the hierarchy object from the ListOfOrder parameter (PDS Order integration object). ProductId is required.
HeaderId	Required for InitInstanceOperation of LOAD or DEFAULT. The row Id of the header.
RootId	Required for InitInstanceOperation of LOAD or SET. The row Id for the root line item.
ProductId	Required for InitInstanceOperation of DEFAULT or ADD. The product Id for the root line item.
ListOfOrder	Required for InitInstanceOperation of SET or ADD. The hierarchy object in PDS Order integration object format.
ListOfData	The list of products, attributes, or relationships for which a user requires the domain information (with exclusions) in CfgInteractData integration object format.

Table 869. Request Message: BeginConfigurationOrder

Node	Description
ProductData	The product type.
Item	The item name.
IntegrationId	The integration Id of the line item. If IntegrationId is specified, then only this line item and its subline items are considered. ProductId is optional. If ProductId is also specified, then it must match IntegrationId. If the IntegrationId and ProductId are not specified, then the root line item is considered.
ProductId	The product Id of the line item. If IntegrationId specified, then only this line item and its subline items are considered. ProductId is optional. If ProductId is also specified, then it must match IntegrationId. If IntegrationId and ProductId are not specified, then the root line item is considered.
Name	The name of the product.
Quantity	The quantity.
RelationshipName	The relationship name. For subline items, RelationshipName can be specified to limit the search to a particular relationship.
RootIntegrationId	The integration Id of the root line item.
PortId	The relationship Id.
ParentProductId	The parent product Id.
ParentIntegrationId	The parent Integration Id.
CanDrilldown	The can-drilldown flag. It indicates whether the line item is a customizable product.
ListPrice	The list price.
NRCCxTotal	The nonrecurring total price. Set this price only on the root line item.
MRCCxTotal	The recurring total price. Set this price only on the root line item.
CurrentPrice	The current price of the item after all the discounts have been applied.
ExchangeDate	The exchange date of the pricing field values.
CurrencyCode	The currency code of the pricing field values.
HasGenericsFlag	The has-generics flag. It indicates whether the line item is incomplete.
EligibilityStatus	The eligibility status.
EligibilityReason	The eligibility reason.

Table 869. Request Message: BeginConfigurationOrder

Node	Description
Explanation	The explanation, if required.
ExplanationText	The text of the explanation.
Relationship	Zero or more. The list of relationships for which information is required.
Name	The name of the relationship to query for. If the query is empty, then all relationships are returned.
Id	The Id. It is always returned whether specified in the request or not.
Request Type	Indicates the type of the information that is calculated for this relationship. The values include: <ul style="list-style-type: none"> ■ SelectionInfo. Only current line items for this relationship are generated. ■ DomainInfo. Only the possible domain items for this relationship are generated. ■ Any other value. Both of the previous values are generated.
DomainItem	Zero or more domain items of the relationship. Always returned whether specified in the request or not.
Name	The name of the domain item.
Id	The Id of the domain item.
ListPrice	The list price.
ExchangeDate	The exchange date of the pricing field values.
CurrencyCode	The currency code of the pricing field values.
PriceType	Indicates the type of list price: one-time or recurring.
CanDrilldown	The can-drill-down flag. It indicates whether the line item is a customizable product.
Excluded	The excluded flag. It indicates whether this domain item is excluded by a constraint, eligibility and compatibility rule, or a promotion.
Attribute	Zero or more attributes for which information is required.
Name	The name of attribute to query for. If the query is empty, then all attributes are returned.
ValueType	The type of the attribute. It is always returned whether specified in the request or not.

Table 869. Request Message: BeginConfigurationOrder

Node	Description
AttributeValue	Zero or more attribute values. It is always returned whether specified in the request or not.
DisplayValue	The display value.
StringValue	The value displayed as a string.
IntegerValue	The value displayed as an integer.
NumberValue	The value displayed as a number.
BooleanValue	The value displayed as a Boolean value.
DateTimeValue	The date and time value.
Selected	The selected flag. It indicates whether this value is selected.
Excluded	The Excluded flag. It indicates whether this value is excluded by a constraint, eligibility and compatibility rule, or promotion.
Item	Zero or more items. Same recursive structure as defined above.
ListOfLinkedItems	The linked items.
LinkedItems	The linked items.
LinkedItemValue	One or more values of linked items.
Name	The name of the linked item.
ValueType	The type of value.
StatusText	The details of the error, if an error occurs.
ConflictResolution	Indicates whether a Proceed or Undo operation was performed on the conflicts and also whether any other violations occurred that resulted in an Undo operation. The values are: Proceed or Undo.
Messages	Zero or one message.
MessageType	Zero or more message types.
MessageSource	The source of the messages, which might be eligibility, promotion, cardinality, proceed actions, and so on.
Message	The message text.
ReturnFullInstance	Indicates whether the Order instance is returned in the ListOfOrder parameter of the response message. The values are: Y (default) and N.

Response Message Description: BeginConfigurationOrder

GetObjGroupItemsOrder and GetObjDefaultGroupItemsOrder have the same request and response messages. See the response message description for BeginConfigurationOrder for details. [Table 870](#) includes a description of this response message BeginConfigurationOrder.

Table 870. Response Message Description: BeginConfigurationOrder

Node	Description
BeginConfigurationOrder_Output	Required.
Error_spcCode	Displays an error code if an error occurs.
Error_spcMessage	Displays an error message if an error occurs.
RootId	The new item's root Id.
RootIntegrationId	The new item's root integration Id.
ListOfOrder	Indicates the order instance, if the ReturnFullInstance input parameter was set to Y. See BeginConfigurationOrder Request Message for details.
ListOfData	The domain information about products, attributes, or relationships and the current selections for the attributes, or relationships that was requested in the request message. See the Request Message for more details.
ListOfStatus	Indicates whether the request was successful or not and contains messages to be displayed.
Status	Required.
StatusCode	The values are: <ul style="list-style-type: none"> ■ Success. The operation was successful. ■ Warning. Some conflicts occurred that were automatically resolved. The messages are present in ListOfMessages. ■ Error. Some conflicts could not be resolved. Any further requests to this session will not be responded to. Messages are present in ListOfMessages.

Request Message Description: UpdateConfigurationOrder

Table 871 includes a description of this request message UpdateConfigurationOrder.

Table 871. Request Message Description: UpdateConfigurationOrder

Node	Description
UpdateConfigurationOrder_Input	Required.
ConflictAutoResolve	The values are: <ul style="list-style-type: none"> ■ Proceed. All conflicts are resolved automatically. ■ Undo. Any conflict will undo the entire batch job.
FinishInstanceInFlag	If this flag is set to Y, then FinishIt is called.
SaveInstanceInFlag	If this flag is set to Y, then the instance is saved to the database.
RepriceInstanceInFlag	If this flag is set to Y, then reprice is called.
VerifyInstanceInFlag	If this flag is set to Y, then the verify instance is called.
ListOfData	Same as ListOfData in BeginConfigurationOrder Request Message.
ListOfRequest	The list of requests that are executed on the product instance.
Requests	The requests.
Request	Zero or more.
Type	The type of request. The values are: AddItem, RemoveItem, SetItemQuantity, SetAttribute, and ReplaceItem.
Item	Zero or more requests.
AddProductId	The add product Id for AddItem or ReplaceItem.
Quantity	The quantity.
RelationshipId	The relationship Id that contains the new product for AddItem or ReplaceItem.
IntegrationId	The integration Id on which the operation is performed.
Attribute	Zero or more SetAttribute request details.
Name	The name of the attribute.
ValueType	The type of value.
AttributeValue	Zero or more.
DisplayValue	The new display value of the attribute
String	The value displayed as a string.
Number	The value displayed as a number.
Integer	The value displayed as an integer.

Table 871. Request Message Description: UpdateConfigurationOrder

Node	Description
Date	The value displayed as a date.
Boolean	The value displayed as a Boolean value.

Response Message Description: UpdateConfigurationOrder

Table 872 includes a description of this request message UpdateConfigurationOrder.

Table 872. Response Message Description: UpdateConfigurationOrder

Node	Description
UpdateConfigurationOrder_Output	Required.
Error_spcCode	Displays an error code if an error occurs.
Error_spcMessage	Displays an error message if an error occurs.
FinishConfigurationOutFlag	Y or N. Indicates whether Finish Configuration was done. It might not be performed if errors occur.
RepriceOutFlag	Y or N. Indicates whether a Reprice operation was done. It might not be performed if errors occur.
SaveInstanceOutFlag	Y or N. Indicates whether the Save Instance was done. It might not be performed if conflicts occur.
VerifyOutFlag	Y or N. Indicates whether Verify was done. It might not be performed if there were errors.
ListOfData	The domain information about products, attributes, or relationships as well as current selections for the attributes, or relationships requested in the request message.
ListOfStatus	Indicates whether the request was successful or not, and contains messages to be displayed.

Request Message Description: EndConfigurationOrder

Table 873 includes a description of this request message EndConfigurationOrder.

Table 873. Request Message Description: EndConfigurationOrder

Node	Description
EndConfigurationOrder_Input	Required.
SaveInstanceFlag	The save-instance flag.

Response Message Description: EndConfigurationOrder

Table 874 includes a description of this request message EndConfigurationOrder.

Table 874. Response Message Description: EndConfigurationOrder

Node	Description
EndConfigurationOrder_Output	Required.
Error_spcCode	Displays an error code if an error occurs.
Error_spcMessage	Displays an error message if an error occurs.
ListOfOrder	The order instance.

Product Configurator Web Service for Orders Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

Table 875 includes a description of the service objects for the Product Configurator Web Service for Orders.

Table 875. Product Configurator Service Objects

Name	Boundary Object Type	Class (if BusService)
Cfg Object Broker	Business Service	CSSCfgObjBrokerService
ConfiguratorWebChannelBeginConfigOrder	Workflow	Not applicable
ConfiguratorWebChannelUpdateConfig	Workflow	Not applicable
ConfiguratorWebChannelEndConfigOrder	Workflow	Not applicable

Data Objects (Integration Object)

Table 876 includes a description of the date objects for the Product Configurator Web Service for Orders.

Table 876. Product Configurator Data Objects

Siebel Repository Name	External Name
CfgInteractData	ListOfData
CfgInteractRequest	ListOfRequest
CfgInteractStatus	ListOfStatus
CfgLinkedItems	ListOfLinkedItems
PDS Order	ListOfOrder

Methods

Table 877 includes a description of the methods for the Product Configurator Web Service for Orders.

Table 877. Product Configurator Methods

Operation	Method
GetObjStructureOrder	GetObjStructure
GetObjGroupItemsOrder	GetObjGroupItems
GetObjDefaultGroupItemsOrder	GetObjDefaultGroupItems

Example Package for Product Configurator Web Service for Orders

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

... \ProductConfiguratorforOrders

Response

See the following file to view the sample code:

... \ProductConfiguratorforOrders

Interface Description (WSDL) for ProductConfigurator Web Service for Orders

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \ProductConfiguratorforOrders

Product Import

Use this Web service to add and update product definitions and product structures in the Siebel CRM application. In this Web service, upsert denotes a combination of the insert and update operations.

The response message returns only an acknowledgement message and not data.

Product Import Operations

For a list of operations associated with this Web service, see [Table 878](#).

Table 878. Product Import Operations

Operation Name	Description
Product Import Insert	<p>This operation:</p> <ul style="list-style-type: none"> ■ Inserts the root product definition. Generates an error if the product definition exists. ■ Upserts the related products in the product structure. Performs the insert operation if the child product structure does not exist. Performs the update operation if the child product structure exists. ■ Upserts the workspace project.
Product Import Update	<p>This operation:</p> <ul style="list-style-type: none"> ■ Updates the root product definition and the related products in the product structure. Generates an error if the product definition or the child product structure does not exist. ■ Upserts the workspace project.
Product Import Upsert	<p>This operation:</p> <ul style="list-style-type: none"> ■ Upserts the root product definition and the related products in the product structure. Performs the insert operation if the product definition or the child product structure does not exist. Performs the update operation if the product definition or the child product structure exists. ■ Upserts the workspace project.

Request Message Description: Product Import Insert

For a description of this request message, see [Table 879](#).

Table 879. Request Message Description: Product Import Insert

Node	Description
SiebelMessage	The Siebel message for the integration object of CMU Product Integration.

Request Message Description: Product Import Update

For a description of this request message, see [Table 880](#).

Table 880. Request Message Description: Product Import Update

Node	Description
SiebelMessage	The Siebel message for the integration object of CMU Product Integration.

Request Message Description: Product Import Upsert

For a description of this request message, see [Table 881](#).

Table 881. Request Message Description: Product Import Upsert

Node	Description
SiebelMessage	The Siebel message for the integration object of CMU Product Integration.

Application Interface for Product Import

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 882](#).

Table 882. Product Import Service Object

Name	Boundary Object Type	Class (If Business Service)
Product Import	Business Service	CSSCMUProdWebSvc

Business Service User Property

For a description of the user properties for this Business Service, see [Table 883](#).

Table 883. Product Import Business Service User Property

Name	Value	Comment
Data Sync Service	EAI Siebel Adapter	EAI Adapter service that is invoked.
Data Sync Service: Attribute	CMU Attribute	Integration object name for data sync service. Currently not supported.
Data Sync Service: Class	CMU Product Class	Integration object name for data sync service. Currently not supported.
Data Sync Service: Product	CMU Product	Integration object name for data sync service.
Data Sync Service: Workspace	CMU Joint Workspace	Integration object name for data sync service.
Definition Business Component	CMU Product Definition VBC	See the first note after this table.
Definition Business Object	CMU Admin ISS Product Definition	See the first note after this table.
Detail Business Component	CMU ISS Product Details BusComp	See the first note after this table.
Integration Field Map: Auto Explode Flag	Product CMU Internal Product VOD Auto Explode Flag	See the second note after this table.
Integration Field Map: Billable Flag	Product CMU Internal Product VOD Billable Flag	See the second note after this table.
Integration Field Map: Billing Service Type	Product CMU Internal Product VOD Billing Service Type	See the second note after this table.
Integration Field Map: Billing Type	Product CMU Internal Product VOD Billing Type	See the second note after this table.
Integration Field Map: Business Unit Id	Product CMU Internal Product VOD Primary Organization ID	See the second note after this table.
Integration Field Map: Check Eligibility Flag	Product CMU Internal Product VOD Pre Pick CD	See the second note after this table.
Integration Field Map: Description	Product CMU Internal Product VOD Description	See the second note after this table.
Integration Field Map: Effective End Time	Product CMU Internal Product VOD End Date	See the second note after this table.

Table 883. Product Import Business Service User Property

Name	Value	Comment
Integration Field Map: Effective Start Time	Product CMU Internal Product VOD Start Date	See the second note after this table.
Integration Field Map: Inclusive Eligibility Flag	Product CMU Internal Product VOD Inclusive Eligibility Flag	See the second note after this table.
Integration Field Map: Orderable Flag	Product CMU Internal Product VOD Orderable	See the second note after this table.
Integration Field Map: Price Type	Product CMU Internal Product VOD Price Type	See the second note after this table.
Integration Field Map: Product Id	Product CMU Internal Product VOD ID	See the second note after this table.
Integration Field Map: Product Name	Product CMU Internal Product VOD Name	See the second note after this table.
Integration Field Map: Product Type	Product CMU Internal Product VOD Product Type Code	See the second note after this table.
Integration Field Map: Sales Product Flag	Product CMU Internal Product VOD Sales Product Flag	See the second note after this table.
Integration Field Map: Service Instance Flag	Product CMU Internal Product VOD Service Instance	See the second note after this table.
Integration Field Map: Service Product Flag	Product CMU Internal Product VOD Sales Service Flag	See the second note after this table.
Integration Field Map: Structure Type	Product CMU Internal Product VOD Product Def Type Code	See the second note after this table.
Integration Field Map: Track As Asset Flag	Product CMU Internal Product VOD Track As Asset Flag	See the second note after this table.
Integration Field Map: Type	Product CMU Internal Product VOD Type	See the second note after this table.
Integration Field Map: Unit of Measure	Product CMU Internal Product VOD Unit of Measure	See the second note after this table.
Integration Field Map: Vendor Id	Product CMU Internal Product VOD Vendor ID	See the second note after this table.
Integration Object: External	CMU Product Integration	See the first note after this table.
Integration Object: Product	CMU Admin ISS Product Definition	See the first note after this table.
Integration Object: Product Structure	CMU Admin ISS Product Structure	See the first note after this table.

Table 883. Product Import Business Service User Property

Name	Value	Comment
Integration Object: Workspace	CMU Admin ISS Joint Workspace Definition	See the first note after this table.
Preset Value: CMU Attribute VOD BusComp	VOD Type:ISS_ATTR_DEF	See the first note after this table.
Preset Value: CMU Attribute Versions BusComp	Version:1	See the first note after this table.
Preset Value: CMU ISS Product Attribute BusComp	Last Version:0	See the first note after this table.
Preset Value: CMU ISS Product Details BusComp	Last Version:0	See the first note after this table.
Preset Value: CMU ISS Product Structure Admin BusComp	Last Version:0	See the first note after this table.
Preset Value: CMU ISS Product VOD BusComp	VOD Type:ISS_PROD_DEF	See the first note after this table.
Preset Value: CMU ISS Product Versions BusComp	Released Flag:N	See the first note after this table.
Preset Value: CMU Internal Product Organization	Organization ID:	See the first note after this table.
Product Business Component	CMU Internal Product VOD	See the first note after this table.
Required Integration Component 1	CMU Attribute Versions BusComp	See the first note after this table.
Required Integration Component 2	CMU ISS Product VOD BusComp	See the first note after this table.
Required Integration Component 3	CMU ISS Product Versions BusComp	See the first note after this table.
Required Integration Component 4	CMU ISS Product Details BusComp	See the first note after this table.
Required Integration Component 5	CMU Internal Product Organization	See the first note after this table.
Structure Business Component	CMU Product Structure VBC	See the first note after this table.

Table 883. Product Import Business Service User Property

Name	Value	Comment
Structure Internal Business Component	CMU ISS Product Structure Admin BusComp	See the first note after this table.
Version Business Component	CMU ISS Product Versions BusComp	See the first note after this table.
Workspace Business Component	CMU ISS Joint Workspace BusComp	See the first note after this table.
Workspace Business Object	CMU Admin ISS Joint Workspace Definition	See the first note after this table.
Workspace Object Business Component	CMU ISS Joint Workspace Object BusComp	See the first note after this table.
Workspace Project Business Component	ISS Joint Workspace BusComp	See the first note after this table.
Workspace Project Business Object	Admin ISS Joint Workspace Definition	See the first note after this table.
Workspace Project Item Business Component	ISS Joint Workspace VOD Pick BusComp	See the first note after this table.
Workspace Project Lock Business Component	ISS Joint Workspace VOD Lock BusComp	See the first note after this table.

NOTE: You must change the value of the operation if you use an integration object, integration component, business object, or business component with a different name.

NOTE: The value of this operation is the field map. The first part is the data type (for example, product, class, and attribute). The second part is the integration component name. The third part is the integration component field name.

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 884](#).

Table 884. Product Import Data Object

Siebel Repository Name	External Name
CMU Product Integration	CMU Product Integration

Methods

For a description of the methods for this Web service, see [Table 885](#).

Table 885. Product Import Methods

Operation	Method
Product Import Insert	[BS: Product Import].Insert
Product Import Update	[BS: Product Import]. Update
Product Import Upsert	[BS: Product Import]. Upsert

Example Package for Product Import

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \ProductImport\ProductImport_request.xml
```

Response

See the following file to view the sample code:

```
... \ProductImport\ProductImport_response.xml
```

Interface Description for Product Import

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \ProductImport\Product Import.wsdl
```

Product Offer

Use this Web service to retrieve and apply product offer information.

Product Offer Operations

For a list of operations associated with this Web service, see [Table 886](#).

Table 886. ProductOffer Operations

Node	Description
GetProductOffer	<p>Retrieves a flat, nonhierarchical list of product offers.</p> <p>This operation does not require any input data. Optional input is the offer ID, the offer name, or a search specification to retrieve a specific list of offers.</p> <p>Output of this operation returns product offer header information such as Offer Id, Offer Name and Offer Description. When an offer ID not provided in the input message, the output will list all the product offers defined in the application.</p>
GetProductOfferStructure	<p>Retrieves the detailed structure of a specific product offer.</p> <p>The input message requires the offer ID.</p> <p>The output message returns product offer definition data such as product offer responses, actions, workflow parameters, named parameters, recommendations, eligibility and compatibility rules, and messages.</p>
GetRecommendedOffers	<p>Retrieves the recommended product offers for a specific account. It also retrieves recommended offers for a specific asset, open quote, or open order.</p> <p>If the account ID is specified in the input message, then the output message will return all the recommended product offers for that account.</p> <p>If the Account ID, Document ID, and Mode are specified in the input message, then the output message will return the recommended offers for that specific asset or open order or open quote</p> <p>This operation only returns recommended product offers. It does not return recommend promotions as part of the response message. Also, this operation enforces response suppression, which means the same offer is not recommended for an account that has previously accepted the offer.</p>

Table 886. ProductOffer Operations

Node	Description
ApplyOfferToCreateOrder	<p>Applies a product offer to an account whose type is set to Residential.</p> <p>The input message requires the account ID and offer ID. If the offer requires modification to the customer's asset, then the asset ID is also required.</p> <p>The output message returns the complete order structure. The user has the option to retrieve just the order ID, or the order number without returning the full order structure.</p> <p>For offers that require user interaction, in other words, offers with named parameters, the input message must be configured with run-time values. Values include attribute value, field value, base product, component product, or upgrade product.</p>
ApplyOfferToCreateQuote	<p>Applies a product offer to an account of a type other than residential.</p> <p>The input message requires the account ID, and offer ID.</p> <p>The output message returns the complete quote structure. The user can retrieve just the quote ID or quote number without returning the full quote structure</p> <p>For offers that require user interaction, in other words, offers with named parameters, the input message must be configured with run-time values. Values include attribute value, field value, base product, component product, or upgrade product.</p>

Request Message Description: GetProductOffer

For a description of this request message, see [Table 887](#).

Table 887. Request Message Description: GetProductOffer

Node	Description	Type
RAFProductOfferListIO	<p>Based on an integration object that is used for both the request and response messages.</p> <p>The user can pass the offer ID to query relevant offer details.</p>	Integration object

Response Message Description: GetProductOffer

For a description of this response message, see [Table 888](#).

Table 888. Response Message Description: GetProductOffer

Node	Description	Type
RAFProductOfferListIO	Based on an integration object that is used for both the request and response message.	Integration object

Request Message Description: GetProductOfferStructure

For a description of this request message, see [Table 889](#).

Table 889. Request Message Description: GetProductOfferStructure

Node	Description	Type
RAFProductOfferStructureIO	Identifies the objects that will be queried for the product offer ID or name. The input message required is offer ID or offer name	Integration object

Response Message Description: GetProductOfferStructure

For a description of this response message, see [Table 890](#).

Table 890. Response Message Description: GetProductOfferStructure

Node	Description	Type
RAFProductOfferStructureIO	<p>The output message has a hierarchy that contains details from the product offer header and all child details of the specified offer. Child objects include:</p> <ul style="list-style-type: none"> ■ Product Offer E and C ■ Product Offer Recommendations ■ Product Offer Responses ■ Product Offer Actions ■ Product Offer Parameters ■ Product Offer Messages 	Integration object

Request Message Description: GetRecommendedOffers

For a description of this request message, see [Table 891](#).

Table 891. Request Message Description: GetRecommendedOffers

Node	Description	Type
Account Id	Required. The account ID of the offer that has been queried.	String
DocId	Optional. Values can be Asset ID, Open Order ID or Open Quote ID for the recommended offer that has been queried.	String
Mode	Value can be Asset, Order, or Quote. Mode is required when document ID is specified.	String

Response Message Description: GetRecommendedOffers

For a description of this response message, see [Table 892](#).

Table 892. Response Message Description: GetRecommendedOffers

Node	Description	Type
RAFProductOfferRecommendationsIO	The output message contains a list of all the product offers recommended for the Account, or the document details that were part of the request message. The response message contains a hierarchy message which contains details of the product offer.	Integration object

Request Message Description: ApplyOfferToCreateOrder

For a description of this request message, see [Table 893](#).

Table 893. Request Message Description: ApplyOfferToCreateOrder

Node	Description	Type
Offer Id	Required. The offer ID that has to be applied.	String
Response	Required. Values can include, Accept, Reject and so on. You must provide the language independent code	String
Account Id	Required. The account on which the offer will be applied.	String
Document Id	Asset ID or order ID on which the offer will be applied.	String
Mode	The asset, or order. This supports the apply offer operations on an open order.	String

Table 893. Request Message Description: ApplyOfferToCreateOrder

Node	Description	Type
SaveInstanceFlag	Possible values are Y or N. If set to Y, then the order is saved to the database. If set to N, then the order persists in memory. The default setting is Y.	String
ReturnFullInstanceFlag	Possible values are Y or N. If set to Y, then the detailed order structure is returned in the response message. If set to N, then only the order is returned. The default setting is Y.	String
RAFActionListIO	Action List is required when the product offer includes user input details. Run-time values that have user input information are provided in the request message. This includes the action details and parameters for that action.	Integration object

Response Message Description: ApplyOfferToCreateOrder

For a description of this response message, see [Table 894](#).

Table 894. Response Message Description: ApplyOfferToCreateOrder

Node	Description	Type
PDSOrder	The order document structure that has been created. This field is populated when the ReturnFullInstanceFlag is set to Y.	Integration object
Order Id	The order ID after the offer has been applied. This field is populated when the SaveInstanceFlag is set to Y.	String
Order Number	The order number after the offer has been applied. This field is populated when the SaveInstanceFlag is set to Y.	String

Request Message Description: ApplyOfferToCreateQuote

For a description of this request message, see [Table 895](#).

Table 895. Request Message Description: ApplyOfferToCreateQuote

Node	Description	Type
Offer Id	Required. The offer ID that has to be applied.	String
Response	Required. Values can include, Accept, Reject and so on. You must provide the language independent code.	String

Table 895. Request Message Description: ApplyOfferToCreateQuote

Node	Description	Type
Account Id	Required. The account on which the offer will be applied.	String
Document Id	Asset ID or order ID on which the offer will be applied.	String
Mode	The asset, or order. This supports the Apply Offer operations on an open order.	String
SaveInstanceFlag	Possible values are Y or N. If set to Y, then the order is saved to the database. If set to N, then the order persists in memory. The default setting is Y.	String
ReturnFullInstanceFlag	Possible values are Y or N. If set to Y, then the detailed order structure is returned in the response message. If set to N, then only the order is returned. The default setting is Y.	String
RAFActionListIO	Action list is required when the product offer includes user input details. Run-time values that have user input information are provided in the request message. This includes the action details and parameters for that action.	Integration object

Response Message Description: ApplyOfferToCreateQuote

For a description of this response message, see [Table 896](#).

Table 896. Response Message Description: ApplyOfferToCreateQuote

Node	Description	Type
PDSQuote	The quote document structure that has been created. This field is populated when the ReturnFullInstanceFlag is set to Y.	Integration object
Quote Id	The quote ID after the offer has been applied. This field is populated when the SaveInstanceFlag is set to Y.	String
Quote Number	The quote number after the offer has been applied. This field is populated when the SaveInstanceFlag is set to Y.	String

Product Offer Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 897](#).

Table 897. Product Offer Service Object

Name	Boundary Object Type	Class
GetProductOfferPort: RAF Product Offer Query Service	Business Service	CSSEAIDataSyncService
GetProductOfferStructurePort: RAF Query Product Offer Structure Workflow	Workflow	Not applicable
GetRecommendedOffersPort	Workflow	Not applicable
ApplyOfferToCreateOrderPort	Workflow	Not applicable
ApplyOfferToCreateQuotePort	Workflow	Not applicable

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 898](#).

Table 898. Product Offer Data Object

Siebel Repository Name	External Name
RAFProductOfferListIO	RAF Product Offer
RAFProductOfferStructureIO	RAF Product Offer Structure
RAFProductOfferRecommendationIO	Product Offer Recommendation
RAFActionListIO	RAF Action List
PDS Quote	PDS Simplified Quote
PDS Order	PDS Simplified Order

Example Package for Product Offer

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request (ApplyOfferToCreateOrder)

See the following file to view the sample code:

... \ProductOffer\ApplyOfferToCreateOrder

Response (ApplyOfferToCreateOrder)

See the following file to view the sample code:

... \ProductOffer\ApplyOfferToCreateOrder

Request (ApplyOfferToCreateOrder_NamedParameter)

See the following file to view the sample code:

... \ProductOffer\ApplyOfferToCreateOrder_NamedParameter

Response (ApplyOfferToCreateOrder_NamedParameter)

See the following file to view the sample code:

... \ProductOffer\ApplyOfferToCreateOrder_NamedParameter

Request (ApplyOfferToCreateQuote)

See the following file to view the sample code:

... \ProductOffer\ApplyOfferToCreateQuote

Response (ApplyOfferToCreateQuote)

See the following file to view the sample code:

... \ProductOffer\ApplyOfferToCreateQuote

Request (ApplyOfferToCreateQuote_NamedParameter)

See the following file to view the sample code:

... \ProductOffer\ApplyOfferToCreateQuote_NamedParameter

Response (ApplyOfferToCreateQuote_NamedParameter)

See the following file to view the sample code:

... \ProductOffer\ApplyOfferToCreateQuote_NamedParameter

Request (GetProductOffer)

See the following file to view the sample code:

... \ProductOffer\GetProductOffer

Response (GetProductOffer)

See the following file to view the sample code:

... \ProductOffer\GetProductOffer

Request (GetProductOfferStructure)

See the following file to view the sample code:

... \ProductOffer\GetProductOfferStructure

Response (GetProductOfferStructure)

See the following file to view the sample code:

... \ProductOffer\GetProductOfferStructure

Request (GetRecommendedProductOffers)

See the following file to view the sample code:

... \ProductOffer\GetRecommendedProductOffers

Response (GetRecommendedProductOffers)

See the following file to view the sample code:

... \ProductOffer\GetRecommendedProductOffers

Interface Description (WSDL) for Product Offer

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \ProductOffer\WSDL

ProductSearchService

Use this business service (Search Product Service) for searching the Product business component and performing an eligibility check.

ProductSearchService Operations

For a list of operations associated with this Web service, see [Table 899](#).

Table 899. ProductSearchService Operations

Node	Description	Type
ExecuteSearch	Retrieves products based on passed criteria.	Input: SearchProductInputSiebelMessage Output: SearchProductResponseSiebelMessage

Request Message Description: ExecuteSearch

For a description of this request message, see [Table 900](#).

Table 900. Request Message Description: ExecuteSearch

Node	Description	Type
EligibilityMode	Eligibility mode.	String
ABOFlag	ABO flag.	String
AccountContractedProductsOnlyFlag	Flag designated only products contracted through a given account.	String
AccountId	Account ID.	String
AccountType	Type of Account.	String
ClassId	Class ID.	String
CurrencyCode	Currency code.	String
DiscountPercent	Discount in percent.	String
DisplayName	Display name.	String
EligibilityDisplayMode	Mode of eligibility.	String
ExchangeDate	Date of exchange.	String
HeaderId	Header ID.	String
Mode	Mode.	String
PriceListId	Price List ID.	String
City	City name.	String
PostalCode	Postal code.	String
State	State name.	String
Country	Country name.	String
BusObjName	Name of the business object.	String
BusCompName	Name of the business component.	String
SignalMode	Signal mode.	String
ContextRowId	The context row ID.	String
ContextMode	The context mode.	String
SearchText	Search criteria.	String
Hits	Records to be fetched.	String
Threshold	Threshold value.	String
Timeout	Timeout value.	String
FromPrice	Price range.	String

Table 900. Request Message Description: ExecuteSearch

Node	Description	Type
ToPrice	Price range.	String
Attribute	Attribute name.	String
Feature	Feature.	String

Response Message Description: ExecuteSearch

For a description of this response message, see [Table 901](#).

Table 901. Response Message Description: ExecuteSearch

Node	Description	Type
TotalRecords	Total number of records retrieved.	String
ProductId	Product ID.	String

ProductSearchService Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 902](#).

Table 902. ProductSearchService Service Object

Name	Boundary Object Type	Class
SearchProductService	Business Service	CSSSrchProductSvc

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 903](#).

Table 903. ProductSearchService Data Object

Siebel Repository Name	External Name
Context	PDS Catalog Context
SearchProductInputSiebelMessage	SearchProductInputIO
SearchProductResponseSiebelMessage	SearchProductResponseIO

Example Package for ProductSearchService

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \ProductSearchService\ProductSearchService_request.xml
```

Response

See the following file to view the sample code:

```
... \ProductSearchService\ProductSearchService_response.xml
```

Interface Description (WSDL) for ProductSearchService

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \ProductSearchService\ProductSearch.wsdl
```

Promotion Asset Web Service

Use this Web service to retrieve a promotion instance, which consists of the asset structure of a promotion and its related components as defined in the Installed Assets applet in Siebel CRM.

NOTE: This is an internal Web service used for Siebel and AIA integration. It should not be modified if an e2e setup is being used.

Promotion Asset Web Service Operations

For a list of operations associated with this Web service, see [Table 904](#).

Table 904. PromotionAssetWebService Operations

Name	Description
SWIAssetManagementPromotionQueryByExample	Queries for assets related to a promotion.

Request Message Description: SWIAssetManagementPromotionQueryByExample

For a description of this request message, see [Table 905](#).

Table 905. Request Message Description: SWIAssetManagementPromotionQueryByExample

Name	Description	Type
ListofSWIAssetManagementPromotionQueryByExample	Assets associated with the promotion.	Integration Object
AssetMgmtPromotionAsset	The asset record.	String
IntegrationId	The Integration ID of the asset.	String

Response Message Description: SWIAssetManagementPromotionQueryByExample

For a description of this response message, see [Table 906](#).

Table 906. Response Message Description: SWIAssetManagementPromotionQueryByExample

Name	Description	Type
ListofSWIAssetManagementPromotionQueryByExample	Container for assets associated with the promotion.	Integration Object
SWIAssetMgmtPromotionAsset	The asset record.	String
AccountType	Account type.	String
AssetId	Asset ID.	String
BillingAccount	Billing account.	String
BillingAccountId	Billing account ID.	String
BillingProfileId	Billing profile ID.	String
BillingProfileName	Billing profile name.	String
BillingType	Billing type.	String
Comments	Any comments.	String
IntegrationId	The integration ID of the asset.	String
Name	The asset name.	String
ParentAssetName	Parent asset name.	String
ParentAssetNumber	Parent asset number.	String
ProdItemId	Product item ID.	String
ProdPromId	Product promotion ID.	String
ProdPromInstanceId	Product promotion instance ID.	String
ProdPromName	Product promotion name.	String
ProdPromRuleId	Product promotion rule ID.	String
ProdPromSourceId	The source ID of the product promotion.	String

Table 906. Response Message Description: SWIAssetManagementPromotionQueryByExample

Name	Description	Type
ProdType	Product type.	String
Productid	The product ID.	String
ProductName	The product name.	String
ProductSPNDefinitionId	The class part number ID of the product.	String
ProductType	Product type.	String
ProductVersion	Product version.	String
ProductXAClassId	The class ID of the product.	String
PromGroupId	Promotion group ID.	String
PromGroupInstanceId	Promotion group instance ID.	String
PromGroupName	Promotion group name.	String
PromGroupRuleId	Promotion group rule ID.	String
PromGroupRuleType	Promotion group rule type.	String
PromotionGroupType	Promotion group type.	String
Quantity	Quantity value.	String
RootAssetId	Root asset ID.	String
RootIntegrationId	Root integration ID.	String
RootProdPromInstanceId	Root product promotion instance ID.	String
RootProductId	Root product ID.	String
RootPromotionGroupId	Root promotion group ID.	String
RootPromotionId	Root promotion ID.	String
ServiceAccount	Service account.	String
ServiceAccountId	Service account ID.	String
ServiceFlag	Service flag.	String
ServiceType	Service type.	String
Status	Status.	String
Type	Promotion type.	String
ServiceInstance	Service instance.	String
ListofSwiAssetMgmtPromotionComponentAsset	Container for component assets associated with the promotion.	Integration object.
SwiAssetMgmtPromotionComponentAsset	Promotion component assets.	String

Table 906. Response Message Description: SWIAssetManagementPromotionQueryByExample

Name	Description	Type
AccountType	Account type.	String
AssetId	Asset ID.	String
BillingAccount	Billing account.	String
BillingAccountId	Billing account ID.	String
BillingProfileId	Billing profile ID.	String
BillingProfileName	Billing profile name.	String
BillingType	Billing type.	String
Comments	Any comments.	String
IntegrationId	The integration ID of the asset.	String
Name	The asset name.	String
ParentAssetName	Parent asset name.	String
ParentAssetNumber	Parent asset number.	String
ProdItemId	Product item ID.	String
ProdPromId	Product promotion ID.	String
ProdPromInstanceId	Product promotion instance ID.	String
ProdPromName	Product promotion name.	String
ProdPromRuleId	Product promotion rule ID.	String
ProdPromSourceId	The source ID of the product promotion.	String
ProdType	Product type.	String
Productid	The product ID.	String
ProductName	The product name.	String
ProductSPNDefinitionId	The class part number ID of the product.	String
ProductType	Product type.	String
ProductVersion	Product version.	String
ProductXAClassId	The class ID of the product.	String
PromGroupId	Promotion group ID.	String
PromGroupInstanceId	Promotion group instance ID.	String
PromGroupName	Promotion group name.	String
PromGroupRuleId	Promotion group rule ID.	String
PromGroupRuleType	Promotion group rule type.	String
PromotionGroupType	Promotion group type.	String

Table 906. Response Message Description: SWIAssetManagementPromotionQueryByExample

Name	Description	Type
Quantity	Quantity value.	String
RootAssetId	Root asset ID.	String
RootIntegrationId	Root integration ID.	String
RootProdPromInstanceId	Root product promotion instance ID.	String
RootProductId	Root product ID.	String
RootPromotionGroupId	Root promotion group ID.	String
RootPromotionId	Root promotion ID.	String
ServiceAccount	Service account.	String
ServiceAccountId	Service account ID.	String
ServiceFlag	Service flag.	String
ServiceType	Service type.	String
Status	Status.	String
Type	Promotion type.	String
ServiceInstance	Service instance.	String

PromotionAssetWebService Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 907](#).

Table 907. PromotionAssetWebService Service Object

Name	Boundary Object Type	Class
SWI Asset Management Promotion	Business Service	CSSEAIDataSyncService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 908](#).

Table 908. PromotionAssetWebService Data Object

Siebel Repository Name	External Name
SWIAssetManagementPromotion	SWIAssetManagementIO

Example Package for PromotionAssetWebService

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
...\PromotionAssetWebService\Request.xml
```

Response

See the following file to view the sample code:

```
...\PromotionAssetWebService\Response.xml
```

Interface Description (WSDL) for PromotionAssetWebService

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
...\PromotionAssetWebService\PromotionAssetWebService.wsdl
```

PromotionWebService

NOTE: This version of PromotionWebService is available only for implementations of Siebel CRM from version 8.1 and later. To use PromotionWebService with Siebel CRM version 8.0, see version 8.0 of *Siebel CRM Web Services Reference*.

Use this Web service to get product promotion information, apply product promotion, get promotion commitment information and to upgrade a promotion.

PromotionWebService Operations

For a list of operations associated with this Web service, see [Table 909](#).

Table 909. PromotionWebService Operations

Name	Description
getProductPromotionDefinition	Returns promotion detail information.
ApplyProductPromotion	Add a promotion and all default components to a quote or order.
getPromotionCommitments	Get promotion commitment information for a given promotion asset.

Table 909. PromotionWebService Operations

Name	Description
UpgradePromotionToQuote	Upgrade or migrate a promotion instance to another promotion and generate a quote with the updated assets information.
UpgradePromotionToOrder	Upgrade or migrate a promotion instance to another promotion and generate an order with the updated assets information.

Request Message Description: GetProductPromotionDefinition

For a description of this request message, see [Table 910](#).

Table 910. Request Message Description: GetProductPromotionDefinition

Name	Description	Type
EligibilityMode	Optional, default value as 2. Could be 0, 1, 2.	Not applicable
PricingMode	Optional, default value as Y. Y or N.	Not applicable
LoadAllDomainFlag	Required value of Y or N.	Not applicable
LoadDefaultDomainFlag	Required value of Y or N.	Not applicable
LoadPromDefFlag	Required value of Y or N.	Not applicable
ContextMode	Required, <i>Siebel Context</i> or <i>External Context</i> .	Not applicable
Context	Required, in SiebelMessage format of IO PDS Catalog Context.	Not applicable
ProdPromRuleType	Optional, <i>Product</i> or <i>Pricing</i> .	Not applicable

Response Message Description: GetProductPromotionDefinition

For a description of this response message, see [Table 911](#).

Table 911. Response Message Description: GetProductPromotionDefinition

Name	Description	Type
ProdPromDefinition	In SiebelMessage format of the integration object ISS Promotion Definition for WS.	Not applicable
PromDomainProduct	In SiebelMessage format of the integration object PDS Product Interface'. Could be either default domain product details or all domain product details depending on input arguments.	Not applicable
Err_spcCode	Error Code if error occurred.	Not applicable
Err_spcMessage	Error Message if error occurred.	Not applicable

Request Message Description: ApplyProductPromotion

For a description of this request message, see [Table 912](#).

Table 912. Request Message Description: ApplyProductPromotion

Name	Description	Type
EligibilityMode	Optional. The default value is 2. Could be 0, 1, 2.	Not applicable
PricingMode	Optional. The default value as Y. Possible values are Y or N.	Not applicable
ProdPromId	Required.	Not applicable
ProdPromInstanceId	Optional, depending on usage scenarios. This parameter lets you add a promotion to an existing quote and associate products already on the quote with the promotion. For more information on using this parameter, see My Oracle Support and query for Doc ID: 1924501.1.	Not applicable
LineItemId	Optional, depending on usage scenarios.	Not applicable
Quantity	Optional. The default value is 1.	Not applicable
SiebelMessage	Required, in SiebelMessage format of the integration object PDS Quote.	Not applicable

Response Message Description: ApplyProductPromotion

For a description of this response message, see [Table 913](#).

Table 913. Response Message Description: ApplyProductPromotion

Name	Description	Type
SiebelMessage	Required. In SiebelMessage format of the integration object PDS Quote.	Not applicable
Err_spcCode	Error code if one occurred.	Not applicable
Err_spcMessage	Error message if one occurred.	Not applicable

Request Message Description: getPromotionCommitments

For a description of this request message, see [Table 914](#).

Table 914. Request Message Description: getPromotionCommitments

Name	Description	Type
Asset Integration Id	Required. Asset Integration ID of the Promotion Instance Asset.	String

Response Message Description: getPromotionCommitments

For a description of this response message, see [Table 915](#).

Table 915. Response Message Description: getPromotionCommitments

Name	Description	Type
PromotionCommitments	An instance of the integration object ISS Promotion Commitments.	Integration Object

Request Message Description: UpgradePromotionToQuote

For a description of this request message, see [Table 916](#).

Table 916. Request Message Description: UpgradePromotionToQuote

Name	Description	Type
NewPromotionId	Required. RowId of new promotion.	String
AssetNumber	Asset number of the selected promotion asset. Provide either AssetNumber or AssetIntegrationId.	String
AssetIntegrationId	Asset integration ID of the selected promotion asset. Provide either AssetNumber or AssetIntegrationId.	String
ActiveDocumentId	A Document in Siebel Order Management refers to a Quote or an Order. Each Document can have multiple children (Quote Items or Order Line Items). ActiveDocumentId refers to the current active Document that the current process is working on. In this Web service call, it is the Quote ID of the active Quote to which the generated quote item has to be added. This is an optional input.	String
AccountId	Account ID of the account that owns the selected promotion asset being upgraded.	String
OverridePenaltyAmount	Penalty amount for upgrading the promotion, if any.	String
OverrideProratePlanId	If there is a penalty for upgrading the promotion, also pass in the prorate plan used to prorate this penalty, if any.	String

Response Message Description: UpgradePromotionToQuote

For a description of this response message, see [Table 917](#).

Table 917. Response Message Description: UpgradePromotionToQuote

Name	Description	Type
QuoteIO	An instance of the integration object PDS Quote.	Integration Object

Request Message Description: UpgradePromotionToOrder

For a description of this request message, see [Table 918](#).

Table 918. Request Message Description: UpgradePromotionToOrder

Name	Description	Type
NewPromotionId	Required. RowId of new promotion.	String
AssetNumber	Asset Number of the selected promotion asset. Provide either AssetNumber or AssetIntegrationId.	String
AssetIntegrationId	Asset Integration ID of the selected promotion asset. Provide either AssetNumber or AssetIntegrationId.	String
ActiveDocumentId	A Document in Siebel Order Management refers to a Quote or an Order. Each Document can have multiple children (Quote Items or Order Line Items). ActiveDocumentId refers to the current active Document that the current process is working on. In this Web service call, it is the Order ID of the active Order to which the generated order item has to be added. This is an optional input.	String
AccountId	Account ID of the account that owns the selected promotion asset being upgraded.	String
OverridePenaltyAmount	Penalty amount for upgrading the promotion, if any.	String
OverrideProratePlanId	If there is a penalty for upgrading the promotion, also pass in the prorate plan used to prorate this penalty, if any.	String

Response Message Description: UpgradePromotionToOrder

For a description of this response message, see [Table 919](#).

Table 919. Response Message Description: UpgradePromotionToOrder

Name	Description	Type
OrderIO	An instance of the integration object PDS Order.	Integration Object

PromotionWebService Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 920](#).

Table 920. PromotionWebService Service Objects

Name	Boundary Object Type
ISS Promotion WS - GetPromotionCommitments	Workflow
ISS Promotion WS-Upgrade Promotion-Quote	Workflow
ISS Promotion WS-Upgrade Promotion-Order	Workflow

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 921](#).

Table 921. PromotionWebService Data Objects

Siebel Repository Name	External Name
ISS Promotion Commitments	ISS Promotion Commitments
PDS Quote	PDS Quote
PDS Order	PDS Order

Example Package for PromotionWebService

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Interface Description (WSDL) for PromotionWebService

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

...\PromotionWebService\PromotionWebService.wsdl

QueryTransportationSalesOrder ItineraryListSiebelReqABCImpl Web Service

Use this outbound Web service to submit an order to the rating engine and get ratings in response. This Web service submits an order request to the third-party application to get feasible solutions for this transportation order.

QueryTransportationSalesOrderItineraryListSiebelReqABCServiceImpl Operations

For a list of operations associated with this Web service, see [Table 922](#).

Table 922. QueryTransportationSalesOrderItineraryList Operations

Name	Description
QueryTransportationSalesOrderItineraryList	Submits the order request

Request Message Description: QueryTransportationSalesOrderItineraryList

For a description of this request message, see [Table 923](#).

Table 923. Request Message Description: QueryTransportationSalesOrderItineraryList

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
QueryTransportationSalesOrderItineraryListReqMsg:QueryTransportationSales_1	Optional	Integration Object

Response Message Description: QueryTransportationSalesOrderItineraryList

For a description of this response message, see [Table 924](#).

Table 924. Response Message Description: QueryTransportationSalesOrderItineraryList

Node	Description	Type
QueryTransportationSalesOrderItineraryListReqMsg:QueryTransportationSales_1	Optional	Integration Object

QueryTransportationSalesOrderItineraryListSiebelReqABCServiceImplService Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 925](#).

Table 925. QueryTransportationSalesOrderItineraryListSiebelReqABCServiceImplService Service Object

Siebel Repository Name	Boundary Object Type	Class
QueryTransportationSalesOrderItineraryListSiebelReqABCServiceImplService	Business Service	CSSWSOutboundDispatcher

This object is called from the virtual business component context. Unlike other Web services, which are generally called by clicking a button or selecting a menu item, this Web service is called when an applet based on the appropriate virtual business component is displayed.

Data Objects (Integration Object)

For a description of data objects for this Web service, see [Table 926](#).

Table 926. QueryTransportationSalesOrderItineraryListSiebelReqABCServiceImplService Data Objects

Siebel Repository Name	External Name
SWIOrderIO	PDS Simplified Order
SWIOrderEntry(Sales)IORes	Order Entry (Sales)

Methods

For a description of the methods for this Web service, see [Table 927](#).

Table 927. QueryTransportationSalesOrderItineraryListSiebelReqABCServiceImplService Methods

Operation	Method
SWIOrderIO	PDS Simplified Order
SWIOrderEntry(Sales)IORes	Order Entry (Sales)

QuoteCheckOutWebService

Use this Web service to perform payment authorizations for quotes.

QuoteCheckOutWebService Operations

For a list of operations associated with this Web service, see [Table 928](#).

Table 928. QuoteCheckOutWebService Operations

Node	Description
QuoteCheckOut	Executes payment authorization. If the authorization fails, then the operation stops and returns. Otherwise, the quote is submitted to order.

Request Message Description: QuoteCheckOut

For a description of this request message, see [Table 929](#).

Table 929. Request Message Description: QuoteCheckOut

Node	Description	Type
QuoteCheckOut_Input	The request message includes the ID of the quote to be submitted, a flag to indicate whether to do credit card authorization, and a flag to indicate whether to submit the quote to order.	ComplexType
InvokeId	Not used.	Not applicable

Response Message Description: QuoteCheckOut

For a description of this response message, see [Table 930](#).

Table 930. Response Message Description: QuoteCheckOut

Node	Description	Type
QuoteCheckOut_Output	The response message includes the ID of the order converted from quote.	ComplexType

Example Package for QuoteCheckOutWebService

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

... \QuoteCheckOutWebService\QuoteCheckOutWebService_request.xml

Response

See the following file to view the sample code:

... \QuoteCheckOutWebService\QuoteCheckOutWebService_response.xml

Interface Description (WSDL) for QuoteCheckOutWebService

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \QuoteCheckOutWebService\QuoteCheckOutWebService.wsdl

QuoteDetailWebService

Use this Web service to retrieve, update, insert, or delete details on a quote record.

QuoteDetailWebService Operations

For a list of operations associated with this Web service, see [Table 931](#).

Table 931. QuoteDetailWebService Operations

Node	Description
QuoteDetailGet	Requests and retrieves quote detail.
QuoteDetailUpdate	Updates quote details.
QuoteDetailInsert	Inserts new quote detail.
QuoteDetailDelete	Deletes quote details.
QuoteDetailInit	Quote is initialized from database.

Request Message Description: QuoteDetailGet

For a description of this request message, see [Table 932](#).

Table 932. Request Message Description: QuoteDetailGet

Node	Description	Type
QuoteDetailGet_Input	Quote object passed to the Web service. It includes the search criteria.	ComplexType

Response Message Description: QuoteDetailGet

For a description of this response message, see [Table 933](#).

Table 933. Response Message Description: QuoteDetailGet

Node	Description	Type
QuoteDetailGet_Output	Quote object returned. It includes the detail of the quote header and the payment information.	ComplexType

Request Message Description: QuoteDetailUpdate

For a description of this request message, see [Table 934](#).

Table 934. Request Message Description: QuoteDetailUpdate

Node	Description	Type
QuoteDetailUpdate_Input	Quote to be updated into database.	ComplexType

Response Message Description: QuoteDetailUpdate

For a description of this response message, see [Table 935](#).

Table 935. Response Message Description: QuoteDetailUpdate

Node	Description	Type
QuoteDetailUpdate_Output	Quote returned with updated information.	ComplexType

Request Message Description: QuoteDetailInsert

For a description of this request message, see [Table 936](#).

Table 936. Request Message Description: QuoteDetailInsert

Node	Description	Type
QuoteDetailInsert_Input	Quote to be inserted into the database.	ComplexType

Response Message Description: QuoteDetailInsert

For a description of this response message, see [Table 937](#).

Table 937. Response Message Description: QuoteDetailInsert

Node	Description	Type
QuoteDetailDelete_Output	Quote returned from the Web service.	ComplexType

Request Message Description: QuoteDetailDelete

For a description of this request message, see [Table 938](#).

Table 938. Request Message Description: QuoteDetailDelete

Node	Description	Type
QuoteDetailDelete_Input	Quote to be deleted from database.	ComplexType

Response Message Description: QuoteDetailDelete

For a description of this response message, see [Table 939](#).

Table 939. Response Message Description: QuoteDetailDelete

Node	Description	Type
QuoteDetailDelete_Output	Quote returned from the Web service.	ComplexType

Request Message Description: QuoteDetailInit

For a description of this request message, see [Table 940](#).

Table 940. Request Message Description: QuoteDetailInit

Node	Description	Type
QuoteDetailInit_Input	Quote to be initialized from the database.	ComplexType

Response Message Description: QuoteDetailInit

For a description of this response message, see [Table 941](#).

Table 941. Response Message Description: QuoteDetailInit

Node	Description	Type
QuoteDetailInit_Output	Quote returned from the Web service.	ComplexType

Example Package for QuoteDetailWebService

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

... \QuoteDetailWebService\QuoteDetailWebService_request.xml

Response

See the following file to view the sample code:

... \QuoteDetailWebService\QuoteDetailWebService_response.xml

Interface Description (WSDL) for QuoteDetailWebService

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \QuoteDetailWebService\QuoteDetailWebService.wsdl

QuoteWebService and OrderWebService

Use this set of Web services to manipulate the Quote or Order data.

QuoteWebService and OrderWebService Operations

For a list of operations associated with this Web service, see [Table 942](#).

Table 942. QuoteWebService and OrderWebService operations

Name	Description
SynchronizeQuote	Provides CRUD operations on quote and quote items. SynchronizeQuote is a standard EAI-based synchronization operation using the PDQ Quote integration object. For more information see the topic on the Synchronize method in <i>Integration Platform Technologies: Siebel Enterprise Application Integration</i> .
Update Order	Updates the order header information.
Update Order Item	Updates the line items for a specific order.
Update Quote	Updates the quote header information.
Update Quote Item	Updates the line items for a specific quote.
Delete Order	Deletes a given order.
Delete Order Item	Deletes the line items on a specific order.
Delete Quote	Deletes a given quote.
Delete Quote Item	Deletes the line items on a specific quote.
Insert Order	Inserts an order.
Insert Order Item	Adds the line items on a given order.
Insert Quote	Inserts a quote.
Insert Quote Item	Adds the line items on a given quote.
Get Quote	Queries the quote.
Get Order	Queries an order.

Request Message Description: SynchronizeQuote

For a description of this request message, see [Table 943](#).

Table 943. Request Message Description: SynchronizeQuote

Node	Description
QuoteIO	Required.

Response Message Description: SynchronizeQuote

For a description of this response message, see [Table 944](#).

Table 944. Response Message Description: SynchronizeQuote

Node	Description
QuoteIO	Required.

Request Message Description: Query, Update, Delete Quote

For a description of this request message, see [Table 945](#).

Table 945. Request Message Description: Query, Update, Delete Quote

QueryByExample/QueryById/InsertQuote/DeleteQuote Request Message	
Node	Description
QuoteIO	Required. An instance of the integration object PDS Quote.

Response Message Description: Query, Update, Delete, Quote

For a description of this response message, see [Table 946](#).

Table 946. Response Message Description: Query, Update, Delete, Quote

QueryByExample/QueryById/InsertQuote/DeleteQuote Response Message	
Node	Description
QuoteIO	Required. An instance of the integration object PDS Quote.

Request Message Description: Query, Update, Delete Quote Item

For a description of this request message, see [Table 947](#).

Table 947. Request Message Description: Query, Update, Delete Quote Item

QueryByExample/UpdateQuoteItem/InsertQuoteItem/DeleteQuoteItem Request Message	
Node	Description
QuoteItemIO	Required. An instance of the integration object PDS Quote Item.

Response Message Description: Query, Update, Delete Quote Item

For a description of this response message, see [Table 948](#).

Table 948. Response Message Description: Query, Update, Delete Quote Item

QueryByExample/UpdateQuoteItem/InsertQuoteItem/DeleteQuoteItem Response Message	
Node	Description
QuoteItemIO	Required. An instance of the integration object PDS Quote Item.

Request Message Description: Query, Update, Delete Order

For a description of this request message, see [Table 949](#).

Table 949. Request Message Description: Query, Update, Delete Order

QueryByExample/QueryById/InsertOrder/DeleteOrder Request Message	
Node	Description
OrderIO	Required. An instance of the integration object PDS Order.

Response Message Description: Query, Update, Delete Order

For a description of this response message, see [Table 950](#).

Table 950. Response Message Description: Query, Update, Delete Order

QueryByExample/QueryById/InsertOrder/DeleteOrder Response Message	
Node	Description
OrderIO	Required. An instance of the integration object PDS Order.

Request Message Description: Query, Update, Delete Order Item

For a description of this request message, see [Table 951](#).

Table 951. Request Message Description: Query, Update, Delete Order Item

QueryByExample/UpdateOrderItem/InsertOrderItem/DeleteOrderItem Request Message	
Node	Description
OrderItemIO	Required. An instance of the integration object PDS Order Item.

Response Message Description: Query, Update, Delete Order Item

For a description of this response message, see [Table 952](#).

Table 952. Response Message Description: Query, Update, Delete Order Item

QueryByExample/UpdateOrderItem/InsertOrderItem/DeleteOrderItem Response Message	
Node	Description
OrderItemIO	Required. An instance of the integration object PDS Order Item.

QuoteWebService and OrderWebService Application Interface

This topic describes the application objects called by the this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 953](#).

Table 953. QuoteWebService and OrderWebService Service Objects

Name	Boundary Object Type	Class (if BusService)
PDQ Quote	BusinessService	CSSEAIDataSyncService
PDS Quote	Business Service	CSSEAIDataSyncService
PDS Quote Item	Business Service	CSSEAIDataSyncService
PDS Order	Business Service	CSSEAIDataSyncService
PDS Order Item	Business Service	CSSEAIDataSyncService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 954](#).

Table 954. QuoteWebService and OrderWebService Data Objects

Siebel Repository Name	External Name
PDS Quote	PDS Simplified Quote
PDS Quote Item	PDS Simplified Quote
PDS Order	PDS Simplified Order
PDS Order Item	PDS Simplified Order

Example Package for QuoteWebService

To view an example of messages for this Web service, navigate to the documentation library for Siebel applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
...\Quote_and_Order\QuotewebService_request.xml
```

Response

See the following file to view the sample code:

```
...\Quote_and_Order\QuotewebService_response.xml
```

Message Schema (WSDL) for QuoteWebService

To view the message schema for this Web service, navigate to the documentation library for Siebel applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
...\Quote_and_Order\QuotewebService.wsdl
```

QuotingWebService

Use this Web service for simple, anonymous quoting. The Web service passes pricing and other related information, without synchronizing, to create a quote in Siebel CRM. All operations are performed in memory on the integration object. When a customer confirms the quote, the Sync Quote flag is set and a quote is created in Siebel CRM.

The following flags control the various workflows or steps executed during the process:

- CalculateShippingCostFlag (Y/N): when enabled, this flag triggers the Shipping Cost Calculation step.
- CalculateTaxFlag: when enabled, this flag triggers the Tax Calculator step.
- CheckEligibilityFlag: when enabled, this flag triggers the E&C (Eligibility and Compatibility) check sub-process.
- Delta Action Code Flag: when enabled, this flag causes Asset Based Ordering to check the Action Code field.
- PricingFlag: when enabled, this flag triggers the RePricing step of the QuoteIO (1st Reprice).
- QueryQuoteFlag: when enabled, this flag triggers the reQuery the Quote step which returns the updated QuoteIO to the requesting application.
- RepricingFlag: when enabled, this flag triggers the Reprice (Again) step after any updates have been made.

- SyncQuoteFlag: when enabled, this flag triggers the Synch Quote operation after the first reprice has been completed. This flag only impacts non-ABO as in ABO the Delta Action Code Flag's sub-process handles the synchronization.
- VerifyPromotionFlag: when enabled, this flag triggers the Verify the Quote's Promotions step.

QuotingWebService Operations

For a list of operations associated with this Web service, see [Table 955](#).

Table 955. QuotingWebService Operations

Name	Description
ExecuteQuoting	Saves the quote to the database. Checks eligibility, verifies the promotion, or calculates the price, shipping charge and tax based on the pass-in flag.

Request Message Description: ExecuteQuoting

For a description of this request message, see [Table 956](#).

Table 956. Request Message Description: ExecuteQuoting

Node	Description	Type
ExecuteQuoting_Input	<p>The request message includes the quote to be saved. It also includes the following flags:</p> <ul style="list-style-type: none"> ■ Flag to indicate whether to check ligibility. ■ Flag to indicate whether to calculate the price for the quote. ■ Flag to indicate whether to calculate the shipping cost. ■ Flag to indicate whether to calculate the tax. ■ Flag to indicate whether to verify the promotion. ■ Flag to indicate whether to query the quote back from database or just return the quote in memory. 	ComplexType
Repricing Flag	Quote that is already synchronized to the database is repriced if this flag is set to Y. Used to Reprice the Quote after any previous steps which may have impacted the overall price of the Quote (such as Shipping, Promotion Verify, and so on).	String
Target Document	Not currently used. Added for future enhancements.	Not applicable
Use UMF	Not currently used. Added for future enhancements.	Not applicable

Table 956. Request Message Description: ExecuteQuoting

Node	Description	Type
Wait Flg	Not currently used.	Not applicable
Continue Recomm	Not currently used.	Not applicable
InvokedId		String
PickListName	Name of the picklist (if any).	String
NamedSearchSpec	Search specification of quote.	String
ExecutionMode	The mode in which the quote is to be performed.	String
LOVLanguageMode	The language mode from the seeded list.	String
ViewMode	The view mode set for the object.	String
PriceOnSync		String
Skip Query Order		String

Response Message Description: ExecuteQuoting

For a description of this response message, see [Table 957](#).

Table 957. Response Message Description: ExecuteQuoting

Node	Description	Type
ExecuteQuoting_Output	The response message includes the quote returned from Web service.	ComplexType
CC Violated Flag	Returned as an output property from the Verify Promotion step to indicate whether the Promotion has been violated.	String

QuotingWebService Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 958](#).

Table 958. QuotingWebService Service Object

Name	Boundary Object Type
Web Channel Quoting Workflow	Not applicable

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 959](#).

Table 959. QuotingWebService Data Object

Siebel Repository Name	External Name
PDS Quote	PDS Simplified Quote

Example Package for QuotingWebService

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \QuotingWebService\QuotingWebService_request.xml
```

Response

See the following file to view the sample code:

```
... \QuotingWebService\QuotingWebService_response.xml
```

Interface Description (WSDL) for QuotingWebService

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \QuotingWebService\QuotingWebService.wsdl
```

Response

Use this Web service for the basic Marketing operations such as creating and updating responses.

Response Operations

For a list of operations associated with this Web service, see [Table 960](#).

Table 960. Response Operations

Name	Description
ResponseCreateResponse	Creates a response.
ResponseSourceCodeLookup	This operation is used to determine the campaign history record.
ResponseUpdateResponse	Updates a response.

Request Message Description: ResponseCreateResponse

This method takes in an Integration object called Response IO and returns the Response ID and Success Flag. For a description of this request message, see [Table 961](#).

Table 961. Request Message Description: ResponseCreateResponse

Node	Description	Type
Response IO	Required input parameter.	Integration Object

Response Message Description: ResponseCreateResponse

For a description of this response message, see [Table 962](#).

Table 962. Response Message Description: ResponseCreateResponse

Node	Description	Type
Response Id	Row ID of the new response.	String
Error Message	Error message, if any.	String
Success Flag	Y or N.	String

Request Message Description: ResponseSourceCodeLookup

This method takes in Ids and Codes of Offer, Campaign and Treatment and returns the S_CAMP_CON_ID. For a description of this request message, see [Table 963](#).

Table 963. Request Message Description: ResponseSourceCodeLookup

Node	Description	Type
Campaign Code	Campaign code of response source.	String
Campaign Id	Campaign ID of response source.	String
Offer Code	Offer code for response.	String
Offer Id	Offer ID for response.	String
Source Code	Source code for response.	String
Treatment Code	Treatment code for response.	String
Treatment Id	Treatment ID for response.	String

Response Message Description: ResponseSourceCodeLookup

For a description of this response message, see [Table 964](#).

Table 964. Response Message Description: ResponseSourceCodeLookup

Node	Description	Type
S_CAMP_CON_ID	Row ID of the response.	String

Table 964. Response Message Description: ResponseSourceCodeLookup

Node	Description	Type
Error Message	Error message, if any.	String
Success Flag	Y or N.	String

Request Message Description: ResponseUpdateResponse

This method updates an existing response. For a description of this request message, see [Table 965](#).

Table 965. Request Message Description: ResponseUpdateResponse

Node	Description	Type
Response IO	Required input parameter.	Integration Object

Response Message Description: ResponseUpdateResponse

For a description of this response message, see [Table 966](#).

Table 966. Response Message Description: ResponseUpdateResponse

Node	Description	Type
Error Message	Error message, if any.	String
Success Flag	Y or N.	String

Example Package for Response

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request (ResponseCreateResponse)

See the following file to view the sample code:

... \Response\ResponseCreateResponse_request.xml

Response (ResponseCreateResponse)

See the following file to view the sample code:

... \Response\ResponseCreateResponse_response.xml

Request (ResponseSourceCodeLookup)

See the following file to view the sample code:

... \Response\ResponseSourceCodeLookup_request.xml

Response (ResponseSourceCodeLookup)

See the following file to view the sample code:

... \Response\ResponseSourceCodeLookup_response.xml

Request (ResponseUpdateResponse)

See the following file to view the sample code:

... \Response\ResponseUpdateResponse_request.xml

Response (ResponseUpdateResponse)

See the following file to view the sample code:

... \Response\ResponseUpdateResponse_request.xml

Interface Description (WSDL) for Response

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \Response\Response.wsd

RetrieveAttachmentService

This Web service has one standard QueryPage method to retrieve attachment documents.

RetrieveAttachmentService Operations

Provides search solution results. Business Service (Search Solution Service) for Searching Solution business component. For a list of operations associated with this Web service, see [Table 967](#).

Table 967. RetrieveAttachmentService Operations

Name	Parameters	Description
QueryPage	Input: Attachment ID Output: AttachmentDocIO (Attachment File Content)	This retrieves the attachment content for a given attachment ID.

Request Message Description: RetrieveAttachmentService

This fetches the Attachment content for a given attachment ID. For a description of this request message, see [Table 968](#).

Table 968. Request Message Description: RetrieveAttachmentService

Node	Description	Type
Id	Document ID	String
ModId	Modification ID	String
ResFileAutoUpdFlg	Y or N	String
ResFileDate	File Date	String
ResFileDeferFlg	Y or N	String
ResFileDockReqFlg	Y or N	String
ResFileDockStatFlg	Y or N	String
ResFileDockStatus	Y or N	String
ResFileExt	File Extension	String
ResFileName	File Name	String
ResFileRev	File ID	String
ResFileSize	File Size	String
ResFileSrcPath	File Source Path	String
ResFileSrcType	File Source Type	String
ResFileBuffer	File Buffer	String
LOVLanguageMode	Language Independent code	String
ExecutionMode	Execution Mode	String
ViewMode	Visibility Access Mode	String

Response Message Description: RetrieveAttachmentService

For a description of this response message, see [Table 969](#).

Table 969. Response Message Description: RetrieveAttachmentService

Node	Description	Type
Id	Document ID	String
ModId	Modification ID	String
ResFileAutoUpdFlg	Y or N	String
ResFileDate	File Date	String
ResFileDeferFlg	Y or N	String

Table 969. Response Message Description: RetrieveAttachmentService

Node	Description	Type
ResFileDockReqFlg	Y or N	String
ResFileDockStatus	Y or N	String
ResFileExt	File Extension	String
ResFileName	File Name	String
ResFileRev	File ID	String
ResFileSize	File Size	String
ResFileSrcPath	File Source Path	String
ResFileSrcType	File Source Type	String
ResFileBuffer	File Buffer	String

RetrieveAttachmentService Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 970](#).

Table 970. RetrieveAttachmentService Service Object

Name	Boundary Object Type	Class
RetrieveAttachmentService	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 971](#).

Table 971. RetrieveAttachmentService Data Object

Siebel Repository Name	External Name
SiebelMessageIn	AttachmentDocIO
SiebelMessageOut	AttachmentDocIO

Example Package for RetrieveAttachmentService

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

...\RetrieveAttachment\RetrieveAttachment_request.xml

Response

See the following file to view the sample code:

...\RetrieveAttachment\RetrieveAttachment_response.xml

Interface Description (WSDL) for RetrieveAttachmentService

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

...\RetrieveAttachment\RetrieveAttachment.wsdl

RTD_NBA Integration Service

This Web service is part of Siebel In-Memory Next Best Action. The Web service enables you to integrate Siebel Contact Center with Oracle Real-Time Decisions (RTD) Server. It includes three operations: CallAdvisor, CallInformant, and ProcessResponseAction.

- CallAdvisor enables an agent to view an offer selected for a customer based on the customer’s input.
- CallInformant passes messages to Oracle RTD which contain information about a specific unit in a business process.
- ProcessResponseAction processes Actions defined for a specific Response.

RTD_NBA Integration Service Operations

For a list of operations associated with this Web service, see [Table 972](#).

Table 972. RTD_NBA Integration Service Operations

Name	Description
CallAdvisor	Makes an Advisor call to Oracle Real-Time Decisions (RTD) Server which processes input from a customer and returns offers based on that input.

Table 972. RTD_NBA Integration Service Operations

Name	Description
CallInformant	Calls an Informant, which contains information about a specific unit in a business process.
ProcessResponseAction	This operation does the following: <ol style="list-style-type: none"> 1 Updates the recommendation history record with the selected Response. 2 Makes an RTD Informant call about the selected Response, then. 3 Performs any predefined Actions for the selected Response.

Request Message Description: CallAdvisor

For a description of this request message, see [Table 973](#).

Table 973. Request Message Description: CallAdvisor

Node	Description	Type
Application	Required. The Inline Service name on the Oracle RTD server. For example, SiebelB2B or SiebelB2C and so on.	String
Attributes	Optional. An instance of the RTD Attributes integration object. Used to send additional attributes for the RTD Advisor call in Name - Value pairs.	Integration Object
IntergrationPoint	Required. The Integration Point name on the Oracle RTD Server. Used to specify a specific integration point among the multiple advisors created in RTD Decision Studio.	String
SessionKeys	Required. An instance of the RTD SessionKeys integration object. Customer information can be added as session key attributes as Name - Value pairs. RTD obtains the customer information from session key attributes of the Web service call.	Integration Object
Trace	Optional. Enables extra logging. Possible values are TRUE or FALSE. The default value is FALSE.	String
TrackRecommendations	Required. Possible values are 'Y' or 'N'. If set to Y, CallAdvisor input attribute details and recommendations details returned by RTD for the corresponding CallAdvisor call are tracked in the Siebel database as a history.	String.

Response Message Description: CallAdvisor

For a description of this response message, see [Table 974](#).

Table 974. Response Message Description: CallAdvisor

Node	Description	Type
ChoiceGroupEvents	Optional. An instance of the integration object RTD Admin CG Events. It contains all the Choice Groups and associated events for all the recommendation types returned by RTD. This is Integration object and name of the IO is RTD Admin CG Events. Please mention tht the output is an instance of this IO.	Integration Object
ClusterVersion	Optional. The cluster version.	String
LogInfo	Optional. Log information.	String
RecommendationTrackID	Optional. The Request ID of the tracked Recommendations. This ID is used in the ProcessResponseAction call to update the selected Response.	String
Response:response	Optional. An instance of the integration object 'res'. Contains the recommendation details returned by the RTD server for the corresponding Advisor call.	Integration Object
Service Version	Optional. Service version.	String.
TraceInfo	Optional. Trace information.	String

Request Message Description: CallInformant

For a description of this request message, see [Table 975](#).

Table 975. Request Message Description: CallInformant

Node	Description	Type
Application	Required. The Inline Service name on the RTD Server. For example, SiebelB2B or SiebelB2C and so on.	String
Attributes	Optional. An instance of the RTD Attributes integration object. Used to send additional attributes for the RTD Informant call in Name - Value pairs.	Integration Object

Table 975. Request Message Description: CallInformant

Node	Description	Type
IntegrationPoint	Required. The integration point name, such as IdentifyCustomer, on the RTD Server. This parameter is used to specify a specific Integration point among the multiple Informants created in RTD Decision Studio.	String
SessionKeys	Required. An instance of the RTD SessionKeys integration object. Customer information can be added as session key attributes in Name - Value pairs. RTD obtains the customer information from session key attributes contained in the Web service call.	Integration Object
Trace	Optional. Enables extra logging. Possible values are TRUE or FALSE. The default value is FALSE.	String

Response Message Description: CallInformant

For a description of this response message, see [Table 976](#).

Table 976. Response Message Description: CallInformant

Node	Description	Type
ClusterVersion	Optional. Cluster version.	String
LogInfo	Optional. Log information.	String
ServiceVersion	Optional. Service version.	String
TraceInfo	Optional. Trace information.	String

Request Message Description: ProcessResponseAction

For a description of this request message, see [Table 977](#).

Table 977. Request Message Description: ProcessResponseAction

Node	Description	Type
Accepted Msg Resp Id	Required. The ID of the Choice Group Event for which the Response is selected. NOTE: All the Response details are provided in the corresponding CallAdvisor Web service method output or are predefined in the Siebel CRM application UI Administration-Marketing, Response Management (RTD) view.	String
Application	Required. The Inline Service name on the RTD Server. For example, SiebelB2B or SiebelB2C and so on.	String
Channel	Required. The channel of the recommendation. This value is used in Informant call of the ProcessResponseAction method.	String
Offer Category	Required. The Offer Category of the recommendation for which the response is chosen	String
RTD Choice Event Name	Required. The Choice Event Name value defined on the RTD Server.	String
Recommendation Id	Required. The Recommendation ID of the recommendation for which the response is chosen.	String
Recommendation Name	Required. The name of the recommendation for which the response is chosen.	String
SessionKeyField	Required. The session key field name that must be used in the Informant call of the ProcessResponseAction method. This value is not used if the SessionKeys integration object structure is passed in the input.	String
SessionKeyValue	Required. The session key value must be used in the Informant call of that ProcessResponseAction method. This value is not used if the SessionKeys integration object structure is passed in the input.	String

Table 977. Request Message Description: ProcessResponseAction

Node	Description	Type
Accepted Message Id	Optional. The ID of the Choice Group for which the response is selected. NOTE: All the Response details are provided in the corresponding CallAdvisor Web service method output or are predefined in the Siebel CRM application UI Administration-Marketing, Response Management (RTD) view.	String
RTD Attributes	Optional. Attributes for an RTD Informant call in the RTD Attributes integration object structure. If not specified, the default attributes are set to make the Informant call.	Integration object
IntegrationPoint	Optional. The RTD Integration Point to be called for Informant call. The default value is TrackChoiceEvent.	String
RTD SessionKeys	Optional. The session keys for the RTD Informant call in the integration object structure. If not specified, the default SessionKeys are set to make the Informant call.	Integration object
Trace	Optional. Enables extra logging. Possible values are TRUE or FALSE. The default value is FALSE.	String
AccountId	Optional. This value is used in the context of named workflow parameters to retrieve account-related information.	String
ContactId	Optional. This value is used in the context of named workflow parameters retrieve contact-related information.	String
RecommendationTrackID	Optional. The Request ID of the tracked recommendation history. This value is provided in the CallAdvisor output if chosen to track the recommendations. This value is empty if you chose not to track the recommendations in the Advisor call.	String

RTD_NBA Integration Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 978](#).

Table 978. RTD_NBA Integration Service Object

Siebel Repository Name	Boundary Object Type	Class
RTD_NBA Integration Service	Business Service	CSSNBAIntegrationService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 979](#).

Table 979. RTD_NBA Integration Data Object

Siebel Repository Name	External Name
RTD Attributes	Attributes
res	res
RTD Admin CG Events	ChoiceGroupEvents
RTD SessionKeys	SessionKeys

Methods

For a description of the methods for this Web service, see [Table 980](#).

Table 980. RTD_NBA Integration Methods

Operation	Method
Call Advisor	CallAdvisor
Call Informant	CallInformant
ProcessResponseAction	ProcessResponseAction

Example Package for RTD_NBA Integration Service

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```

... \RTD_NBA Integration Service\CallAdvisor\CallAdvisor_request.txt
... \RTD_NBA Integration Service\CallInformant\CallAdvisor_request.txt
... \RTD_NBA Integration
Service\ProcessResponseAction\ProcessResponseAction_request.txt
    
```

Response

See the following file to view the sample code:

...\RTD_NBA Integration Service\CallAdvisor\CallAdvisor_response.txt

...\RTD_NBA Integration Service\CallInformant\CallInformant_response.txt

Interface Description (WSDL) for RTD_NBA Integration Service

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

...\RTD_NBA Integration Service\http___siebel.com_CustomUI_RTD_NBA Integration Service.wsdl

SCOAExportWS

Use this outbound Web Service to export an update commerce job to Siebel Commerce Object Aggregator (SCOA).

SCOAExportWS Operations

For a list of operations associated with this Web service, see [Table 981](#).

Table 981. SCOAExportWS Operations

Name	Description
StartExportJob	Export a content job to SCOA

Request Message Description: StartExportJob

For a description of this request message, see [Table 982](#).

Table 982. Request Message Description: StartExportJob

Node	Description	Type
JobId	Update Commerce Job Id	String

Response Message Description: StartExportJob

For a description of this response message, see [Table 983](#).

Table 983. Response Message Description: StartExportJob

Node	Description	Type
Return	Return status from SCOA	String

SCOAExportWS Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 984](#).

Table 984. SCOAExportWS Service Object

Name	Boundary Object Type	Class
SCOAExportWS	Business Service	CSSWSOutboundDispatcher

Methods

For a description of the methods for this Web service, see [Table 985](#).

Table 985. SCOAExportWS Methods

Operation	Method
StartExportJob	StartExportJob

Example Package for SCOAExportWS

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \SCOAExport\SCOAExportRequest.xml
```

Response

See the following file to view the sample code:

```
... \SCOAExport\SCOAExportResponse.xml
```

Interface Description (WSDL) for SCOAExportWS

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

```
... \SCOAExport\SCOAExportWS.WSDL
```

searchSolution

Use this Web service to search for solutions based on user inputs, and retrieve a solution as a search result.

searchSolution Operations

The operations provide search solution results. The Web service uses the business service called Search Solution Service of Searching Solution business component. For a list of operations associated with this Web service, see [Table 986](#).

Table 986. searchSolution Operations

Name	Parameters	Description
searchSolution.searchSolution	Input: SearchInputsIO (SearchText, SolutionType, To, From). Output: SearchResultsIO (Total Records, Solution ID, Solution Title, Last Update Date).	Performs a search on a solution based on specified input.
searchSolution.getSolution	Input: SolutionId. Output: SolutionResultIO (Solution ID, Solution Title, Last Update Date, FAQ, Resolution Text, Solution Type, SolnAttachmentList (Attachment ID, File Name, Last Updated Date, Type)).	Retrieves solution from search results.

Request Message Description: searchSolution

Performs a search on a solution based on specified input. For a description of this request message, see [Table 987](#).

Table 987. Request Message Description: searchSolution

Node	Description	Type
SearchText	Text to be searched.	String
SolutionType	Type of Solution.	String
From	Index of Record.	String
To	Index of Record.	String

Response Message Description: searchSolution

For a description of this response message, see [Table 988](#).

Table 988. Response Message Description: searchSolution

Node	Description	Type
TotalRecords	Total number of records fetched.	String
From	Index of the first record returned.	String
SolutionId	Solution ID.	String
SolutionTitle	Solution Title.	String
LastUpdateDate	Last update date of the record.	String
To	Index of the last record fetched.	String

Request Message Description: getSolution

Retrieves solution from search results. For a description of this request message, see [Table 989](#).

Table 989. Request Message Description: getSolution

Node	Description	Type
SolutionId	Solution ID	String

Response Message Description: getSolution

For a description of this response message, see [Table 990](#).

Table 990. Response Message Description: getSolution

Node	Description	Type
FAQ	Frequently Asked Question	String
LastUpdateDate	Last update date of the record	String
AttachmentId	Attachment ID	String
AttachmentType	Type of Attachment	String
Name	Name	String
ResolutionText	Resolution Text message	String

searchSolution Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 991](#).

Table 991. searchSolution Service Object

Name	Boundary Object Type	Class
Search Solution Service	Business Service	CSSSrchSolutionSvc

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 992](#).

Table 992. searchSolution Data Object

Siebel Repository Name	External Name
SolutionResultSiebelMessage	SolutionResultIO
SearchInputsSiebelMessage	SearchInputsIO
SearchResultsSiebelMessage	SearchResultsIO

Example Package for searchSolution

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

... \searchSolution\searchSolution_request.xml

Response

See the following file to view the sample code:

... \searchSolution\searchSolution_response.xml

Interface Description (WSDL) for searchSolution

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \searchSolution\searchSolution.wsdl

SelfServiceAccount

This Web service makes available the EAI UI business service SelfServiceAccount, which provides CRUD and query operations on the integration object SS_Account_IO.

This Web service makes available the Execute and Query Methods in the SelfServiceAccount business service as Web service operations.

SelfServiceAccount Operations

For a list of operations associated with this Web service, see [Table 993](#).

Table 993. SelfServiceAccount Operations

Name	Description
SelfServiceAccountExecute	Performs CRUD operations on the instance of SS_Account_IO provided as input. This operation is used in Siebel Self-Service for adding, editing and deleting BusinessAddress to an Account.
SelfServiceAccountQueryPage	Performs Query operation based on the viewCriteria and searchSpec set on the instance of SS_Account_IO provided as input. This operation is used in Siebel Self-Service for querying the details of an Account, inclusive of the Business Addresses associated to the account.

Request Message Description: SelfServiceAccountExecute

For a description of this request message, see [Table 994](#).

Table 994. Request Message Description: SelfServiceAccountExecute

Node	Description
SelfServiceAccountExecute_Input	Container element for the Execute Operation request.
ListOfSSAccount	Corresponds to an instance of SS_Account_IO.
ListOfSSAccount/ Account	Set operation accordingly. If account details need to be updated, then set the operation to Update. If the business address needs to be added or updated, then set operation to Skipnode.
ListOfSSAccount/ Account /Id	Set the ID of the account as a ViewCriteria, if the purpose is to update the account or create and update business address for the given account.
ListOfSSAccount/ Account / ListOfAccountBusinessAddress	Container element to hold the list of business addresses to be created or updated for the account.

Table 994. Request Message Description: SelfServiceAccountExecute

Node	Description
ListOfSSAccount/ Account / ListOfAccountBusinessAddress/ AccountBusinessAddress	Used to create or update the business address of the Account. Set operation appropriately as Insert or Update and enable the IsPrimaryMVG setting, if this address needs to be made the primary address on the Account.
ListOfSSAccount/ Account / ListOfAccountBusinessAddress/ AccountBusinessAddress/ Id	If the operation is update on AccountBusinessAddress, then set this field to the specific address of the account.
ListOfSSAccount/ Account / ListOfAccountBusinessAddress/ AccountBusinessAddress/ StreetAddress (Similarly StreetAddress2, AddressLine3, State, City, County, Country)	Set appropriate values for the details of this address.
ListOfSSAccount/ Account / ListOfAccountBusinessAddress/ AccountBusinessAddress/ MainAddressFlag	Set to TRUE if the address is the main address for the account.
ListOfSSAccount/ Account / ListOfAccountBusinessAddress/ AccountBusinessAddress/ BillAddressFlag	Set TRUE if the address is the billable address for the account.
ListOfSSAccount/ Account / ListOfAccountBusinessAddress/ AccountBusinessAddress/ ShipAddressFlag	Set TRUE to fetch if the address is the shippable address for the account.
ListOfSSAccount/ Account / ListOfAccountBusinessAddress/ AccountBusinessAddress/ ActiveStatus	Set to TRUE, if only the active addresses of the account need to be retrieved.
ListOfAccountBusinessAddress/ AccountBusinessAddress/ ModId	Set the ModId while updating, so as to make sure that the record is not updated in the interim.
ExecutionMode	For more information, see <i>Business Processes and Rules: Siebel Enterprise Application Integration</i> .
LOVLanguageMode	For more information, see <i>Business Processes and Rules: Siebel Enterprise Application Integration</i> .
ViewMode	For more information, see <i>Business Processes and Rules: Siebel Enterprise Application Integration</i> .

Response Message Description: SelfServiceAccountExecute

For a description of this response message, see [Table 995](#).

Table 995. Response Message Description: SelfServiceAccountExecute

Node	Description
SelfServiceAccountExecute_Output	Container element for the Execute Operation response.
ListOfSSAccount	Corresponds to an instance of SS_Account_IO.
ListOfSSAccount/ Account	Account name.
ListOfSSAccount/ Account /Id	ID of the account.
ListOfSSAccount/ Account / Mod Id	Mod ID for the account record.
ListOfSSAccount/ Account / ListOfBusinessAddress	Container element for the list of created or updated business address of the account.
ListOfSSAccount/ Account / ListOfBusinessAddress/ BusinessAddress	For each created or updated business address of the account.
ListOfSSAccount/ Account / ListOfBusinessAddress/ BusinessAddress/ Id	ID of the address created or updated.
ListOfSSAccount/ Account / ListOfBusinessAddress/ BusinessAddress/ ModId	ModId of the address record created or updated.

Request Message Description: SelfServiceAccountQueryPage

This operation is used to query the details of the Account or to query the list of business addresses associated with an account. This operation also retrieves the following information for a given account: primary address ID, primary Bill To Address ID, primary Ship To Address ID, as well as determining if each of the retrieved addresses are Billable or Shippable. Siebel Self-Service Applications version 8.1 use LOVLanguageMode as 'LDC' and ViewMode as 'All' for this Web service. For a description of this request message, see [Table 996](#).

Table 996. Request Message Description: SelfServiceAccountQueryPage

Node	Description
SelfServiceAccountQueryPage_Input	Container element for the QueryPage Operation request.
ListOfSSAccount	Corresponds to an instance of SS_Account_IO.
ListOfSSAccount/ Account	Account name.
ListOfSSAccount/ Account /Id	Set the ID of the account as a ViewCriteria.

Table 996. Request Message Description: SelfServiceAccountQueryPage

Node	Description
ListOfSSAccount/ Account / PrimaryAddressId	Empty. Used to fetch the ID of the primary address of the account.
ListOfSSAccount/ Account / PrimaryBillToAddressId	Empty. Used to fetch the ID of the Primary Bill To address of the account.
ListOfSSAccount/ Account / PrimaryShipToAddressId	Empty. Used to fetch the ID of the Primary Ship To address of the account.
ListOfSSAccount/ Account / ListOfBusinessAddress	To fetch the business address of the account.
ListOfSSAccount/ Account / ListOfBusinessAddress/ BusinessAddress	Empty.
ListOfSSAccount/ Account / ListOfBusinessAddress/ BusinessAddress/ Id	Empty (Set it to retrieve a specific address of this account).
ListOfSSAccount/ Account / ListOfBusinessAddress/ BusinessAddress/ StreetAddress (Similarly StreetAddress2, AddressLine3, State, City, County, Country)	Empty. Set appropriate View Criteria for filtering addresses.
ListOfSSAccount/ Account / ListOfBusinessAddress/ BusinessAddress/ MainAddressFlag	Empty. Used to fetch if the address is the main address for the account.
ListOfSSAccount/ Account / ListOfBusinessAddress/ BusinessAddress/ BillAddressFlag	Empty. Used to fetch if the address is the Billable Address for the account.
ListOfSSAccount/ Account / ListOfBusinessAddress/ BusinessAddress/ ShipAddressFlag	Empty. Used to fetch if the address is the Shippable Address for the account.
ListOfSSAccount/ Account / ListOfBusinessAddress/ BusinessAddress/ ActiveStatus	Set to TRUE, only if the active addresses of the account need to be retrieved.
ListOfSSAccount/ Account /	Empty.
ListOfBusinessAddress/ BusinessAddress/ ModId	Empty. Used to fetch the ModId to be sent back while updating, so as to make sure that the record is not updated in the interim.

Table 996. Request Message Description: SelfServiceAccountQueryPage

Node	Description
ExecutionMode	For more information, see <i>Business Processes and Rules: Siebel Enterprise Application Integration</i> .
LOVLanguageMode	For more information, see <i>Business Processes and Rules: Siebel Enterprise Application Integration</i> .
ViewMode	For more information, see <i>Business Processes and Rules: Siebel Enterprise Application Integration</i> .

Response Message Description: SelfServiceAccountQueryPage

For a description of this response message, see [Table 997](#).

Table 997. Response Message Description: SelfServiceAccountQueryPage

Node	Description
SelfServiceAccountQueryPage_Output	Container element for the QueryPage Operation response.
ListOfSSAccount	Corresponds to an instance of SS_Account_IO.
ListOfSSAccount/ Account	
ListOfSSAccount/ Account /Id	ID of the account.
ListOfSSAccount/ Account / PrimaryAddressId	Retrieved ID of the Primary Address of the account.
ListOfSSAccount/ Account / PrimaryBillToAddressId	Retrieved ID of the Primary Bill To address of the account.
ListOfSSAccount/ Account / PrimaryShipToAddressId	Retrieved ID of the Primary Ship To address of the account.
ListOfSSAccount/ Account / ListOfBusinessAddress	Container element for the retrieved Business Address of the account.
ListOfSSAccount/ Account / ListOfBusinessAddress/ BusinessAddress	For each retrieved business address of the account.
ListOfSSAccount/ Account / ListOfBusinessAddress/ BusinessAddress/ Id	ID of the address.
ListOfSSAccount/ Account / ListOfBusinessAddress/ BusinessAddress/ StreetAddress (Similarly StreetAddress2, AddressLine3, State, City, County, Country)	Details of the business address.

Table 997. Response Message Description: SelfServiceAccountQueryPage

Node	Description
ListOfSSAccount/ Account / ListOfBusinessAddress/ BusinessAddress/ MainAddressFlag	True, if the address is the main Address for the account.
ListOfSSAccount/ Account / ListOfBusinessAddress/ BusinessAddress/ BillAddressFlag	True, if the address is the Billable Address for the account.
ListOfSSAccount/ Account / ListOfBusinessAddress/ BusinessAddress/ ShipAddressFlag	True, if the address is the Shippable Address for the account.
ListOfSSAccount/ Account / ListOfBusinessAddress/ BusinessAddress/ ActiveStatus	True, if the address is active.
ListOfBusinessAddress/ BusinessAddress/ ModId	Empty; to fetch the ModId to be sent back while updating, so as to make sure that the record is not updated in the interim.

SelfServiceAccount Application Interface

This topic describes the application objects called by this Web service. This Web service makes available the EAI UI business service SelfServiceAccount, which provides CRUD and query operations on the integration object SS_Account_IO. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 998](#).

Table 998. SelfServiceAccount Service Object

Name	Boundary Object Type	Class
SelfServiceAccount	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 999](#).

Table 999. SelfServiceAccount Data Object

Siebel Repository Name	External Name
SS_Account_IO	SS_Account_IO

Example Package for SelfServiceAccount

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request (SelfServiceAccountExecute)

See the following file to view the sample code:

```
... \SelfServiceAccount\SelfServiceAccountExecute_request.xml
```

Response (SelfServiceAccountExecute)

See the following file to view the sample code:

```
... \SelfServiceAccount\SelfServiceAccountExecute_response.xml
```

Request (SelfServiceAccountQueryPage)

See the following file to view the sample code:

```
... \SelfServiceAccount\SelfServiceAccountQueryPage_request.xml
```

Response (SelfServiceAccountQueryPage)

See the following file to view the sample code:

```
... \SelfServiceAccount\SelfServiceAccountQueryPage_response.xml
```

Interface Description (WSDL) for SelfServiceAccount

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \SelfServiceAccountQueryPage\SelfServiceAccount.wsdl
```

SelfServiceAccountRootPath

This Web service makes available the EAI UI business service SelfServiceAccountRootPath, which provides query operations on integration object SS_AccountRootPath_IO.

This Web service makes available the Query Method in the SelfServiceAccount business service as a Web service operation. In Siebel Self-Service Applications, version 8.1, this operation is used in the context of Global Accounts - Account Hierarchy. For a given account, this operation is used for retrieving the path to the root account and also to fetch the price lists of the accounts along this path.

SelfServiceAccountRootPath Operations

For a list of operations associated with this Web service, see [Table 1000](#).

Table 1000. SelfServiceAccountRootPath Operations

Name	Description
SelfServiceAccountRootPathQueryPage	Performs a query operation based on the viewCriteria and searchSpec set on the instance of SS_AccountRootPath_IO provided as input. The response contains the list of accounts along the path to the root account and the priceList set for each of these accounts.

Request Message Description: SelfServiceAccountRootPathQueryPage

For a description of this request message, see [Table 1001](#).

Table 1001. Request Message Description: SelfServiceAccountRootPathQueryPage

Node	Description
SelfServiceAccountRootPathQueryPage_Input	Container element for the QueryPage operation request.
ListOfSSAccountRootPath	Corresponds to an instance of SS_AccountRootPath_IO.
ListOfSSAccountRootPath / SSAccountRootPath	Container element, which holds the columns to be queried, and the criteria to be used.
ListOfSSAccountRootPath / SSAccountRootPath /ParPartyId	Empty.
ListOfSSAccountRootPath / SSAccountRootPath /PartyId	Empty.
ListOfSSAccountRootPath / SSAccountRootPath /PartyName	Empty.
ListOfSSAccountRootPath / SSAccountRootPath /PriceListId	Empty.
ListOfSSAccountRootPath / SSAccountRootPath /RelationTypeCode	Empty.
ListOfSSAccountRootPath / SSAccountRootPath /Level1PartyId	ID of the Account, from which the path to the root Account needs to be identified.
ExecutionMode	Forward only.
LOVLanguageMode	LDC.
ViewMode	All.

Response Message Description: SelfServiceAccountRootPathQueryPage

The response contains the details based on the query set on the Payment integration object .

For a description of this response message, see [Table 1002](#).

Table 1002. Response Message Description: SelfServiceAccountRootPathQueryPage

Node	Description
SelfServiceAccountRootPathQueryPage_Output	Container element for the QueryPage Operation response.
ListOfSSAccountRootPath	Corresponds to an instance of SS_AccountRootPath_IO.
ListOfSSAccountRootPath /SSAccountRootPath	Container element, which corresponds to an Account that is present along the path to the root Account.
ListOfSSAccountRootPath /SSAccountRootPath / ParPartyId	If ParPartyId is null, the retrieved account is deemed as the root account. Otherwise, this account is one of the accounts in the path.
ListOfSSAccountRootPath /SSAccountRootPath / PartyId	ID of the retrieved account.
ListOfSSAccountRootPath /SSAccountRootPath / PartyName	Name of the retrieved account.
ListOfSSAccountRootPath /SSAccountRootPath / PriceListId	PriceListId of the retrieved account.
ListOfSSAccountRootPath /SSAccountRootPath / RelationTypeCode	SELF or DIRECT or INDIRECT.
ListOfSSAccountRootPath /SSAccountRootPath / Level1PartyId	DIRECT. The Account is the parent the Level1PartyId.

SelfServiceAccountRootPath Application Interface

This topic describes the application objects called by the SelfServiceAccountRootPath. For more information on application implementation, refer to your application development documentation on Oracle Technology Network. For more information on application implementation, refer to application development documentation.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1003](#).

Table 1003. SelfServiceAccountRootPath Service Object

Name	Boundary Object Type	Class
SelfServiceAccountRootPath	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1004](#).

Table 1004.SelfServiceAccountRootPath Data Object

Siebel Repository Name	External Name
SS_AccountRootPath_IO	SS_AccountRootPath_IO

Example Package for SelfServiceAccountRootPath

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

... \SelfServiceAccountRootPath\SelfServiceAccountRootPath_request.xml

Response

See the following file to view the sample code:

NOTE: You need to filter out unnecessary SELF relationship records returned in this response.

... \SelfServiceAccountRootPath\SelfServiceAccountRootPath_response.xml

Interface Description (WSDL) for SelfServiceAccountRootPath

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \SelfServiceAccountRootPath\SelfServiceAccountRootPath.wsdl

SelfServiceAllAccountsList

This Web service makes available the EAI UI business service SelfServiceAllAccountsList, which provides query operations on the integration object SS_AllAccount_List_IO.

This Web service make available the Query Method in the SelfServiceAllAccountsList Business Service as Web service operation. In Siebel Self-Service Applications version 8.1, this operation is used in the context of Global Accounts - Account Hierarchy. For a given root account, this operation is used for retriving all the children accounts that are directly or indirectly related to it, including itself.

SelfServiceAllAccountsList Operations

For a list of operations associated with this Web service, see [Table 1005](#).

Table 1005. SelfServiceAllAccountsList Operations

Name	Description
SelfServiceAllAccountsListQueryPage	Performs Query operation based on the viewCriteria (contains the Root Account ID) on the instance of SS_AllAccount_List_IO provided as input. The response contains the list of accounts that are related to the root account.

Request Message Description: SelfServiceAllAccountsListQueryPage

For a description of this request message, see [Table 1006](#).

Table 1006. Request Message Description: SelfServiceAllAccountsListQueryPage

Node	Description	Type
SelfServiceAllAccountsListQueryPage_Input	Container element for the QueryPage Operation request.	String
ListOfSSAllAccount	Corresponds to an instance of SS_AllAccount_List_IO.	String
ListOfSSAllAccount /SSAllAccountList	Container element, which holds the columns to be queried, and the criteria to be used.	String
ListOfSSAllAccount /SSAllAccountList	Empty.	String
/ModId	Set the Root Account ID as the view criteria.	String
ListOfSSAllAccount /SSAllAccountList / ParentPartyId	Empty.	String

Table 1006.Request Message Description: SelfServiceAllAccountsListQueryPage

Node	Description	Type
ListOfSSAllAccount /SSAllAccountList / RelationTypeCode	Empty	String
ListOfSSAllAccount /SSAllAccountList / Level1AccountStatus /Level1ApprovalStatus Level1BusinessPhone Level1EmailAddress Level1FaxNumber Level1ParentPartyId Level1PartyLocation Level1PartyName Level1PriceListId Level1PrimaryAddressId Level1PrimaryBillToAddressId Level1PrimaryContactId Level1PrimaryShipToAddressId Level1Type		
Level2ParentAccountName	Empty (Columns to be retrieved in the response)	String
ExecutionMode	Empty	String
LOVLanguageMode	ForwardOnly	String
ViewMode	LDC	String

Response Message Description: SelfServiceAllAccountsListQueryPage

For a description of this response message, see [Table 1007](#).

Table 1007.Response Message Description: SelfServiceAllAccountsListQueryPage

Node	Description	Type
SelfServiceAllAccountsListQueryPage_Input	Container element for the QueryPage Operation response.	String
ListOfSSAllAccount	Corresponds to an instance of SS_AllAccount_List_IO.	String

Table 1007. Response Message Description: SelfServiceAllAccountsListQueryPage

Node	Description	Type
ListOfSSAllAccount /SSAllAccountList /ModId	Container element, which holds the columns to be queried, and the criteria to be used.	String
ListOfSSAllAccount /SSAllAccountList / ParentPartyId	Empty.	String
ListOfSSAllAccount /SSAllAccountList /PartyId	AccountId of the child account.	String
ListOfSSAllAccount /SSAllAccountList / RelationTypeCode	Whether the child is directly or indirectly under this root account. Can be SELF, DIRECT or INDIRECT.	String
ListOfSSAllAccount /SSAllAccountList / Level1AccountStatus, Level1ApprovalStatus, Level1BusinessPhone, Level1EmailAddress, Level1FaxNumber, Level1PartyName, Level1PartyLocation, Level1PriceListId, Level1PrimaryAddressId, Level1PrimaryBillToAddressId, Level1PrimaryContactId, Level1PrimaryShipToAddressId, Level1Type	Retrieved details of the child account.	String
ListOfSSAllAccount /SSAllAccountList / Level1ParentPartyId	Immediate Parent of this child account. For accounts with RelationTypeCode as DIRECT, it matches the root account ID itself.	String
ListOfSSAllAccount /SSAllAccountList / Level2ParentAccountName	AccountName of the Immediate Parent of this child account.	String

SelfServiceAllAccountsList Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1008](#).

Table 1008. SelfServiceAllAccountsList Service Object

Name	Boundary Object Type	Class
SelfServiceAllAccountsList	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1009](#).

Table 1009. SelfServiceAllAccountsList Service Object

Siebel Repository Name	External Name
SS_AllAccount_List_IO	SS_AllAccount_List_IO

Example Package for SelfServiceAllAccountsList

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
...\SelfServiceAllAccountsList\SelfServiceAllAccountsList_request.xml
```

Response

See the following file to view the sample code:

```
...\SelfServiceAllAccountsList\SelfServiceAllAccountsList_response.xml
```

Interface Description (WSDL) for SelfServiceAllAccountsList

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
...\SelfServiceAllAccountsList\SelfServiceAllAccountsList.wsdl
```


SelfServiceContact

This Web service makes available the EAI UI business service SelfServiceContact, which provides CRUD and query operations on the integration object SS_Contacts_IO.

This Web service makes available the Execute and Query Methods in the SelfServiceContact business service as Web service operations.

NOTE: Though most of the Contact and Account management activities can be performed using SelfServiceContact Web service, Siebel Self-Service Applications use the SelfServiceRegistration Web service, which also accepts an instance of the integration object SS_Contacts_IO. The SelfServiceRegistration Web service calls the SelfServiceRegistration workflow, which delegates the integration object to SelfServiceContact business service.

As a result, in Siebel Self-Service Applications, the SelfServiceContact Web service is most often used for the QueryPage operation.

SelfServiceContact Operations

For a list of operations associated with this Web service, see [Table 1010](#).

Table 1010. SelfServiceContact Operations

Name	Description
SelfServiceContactExecute	<p>Used to set the direction of a query on a business component. Valid values are ForwardOnly and Bidirectional. The default value is Bidirectional.</p> <p>The ForwardOnly value is more efficient than Bidirectional, and is recommended in cases where you must process a large number of records in the forward direction only (such as for report generation). For operations that are likely to return more than 10000 records, use ForwardOnly to avoid errors.</p> <p>For more information on executing queries, see the topic on the ExecuteQuery business component method in <i>Siebel Object Interfaces Reference</i>.</p>
SelfServiceContactQueryPage	<p>Performs a query operation based on the viewCriteria and searchSpec set on the instance of SS_Contacts_IO provided as input. This operation is used in Siebel Self-Service Applications version 8.1 for querying the details of the contact, inclusive of the Personal Addresses associated to the contact.</p>

Request Message Description: SelfServiceContactExecute

For a description of this request message, see [Table 1011](#).

Table 1011. Request Message Description: SelfServiceContactExecute

Node	Description	Type
ExecutionMode	<p>Used to set the direction of a query on a business component. Valid values are ForwardOnly and Bidirectional. The default value is Bidirectional.</p> <p>ForwardOnly is generally recommended over Bidirectional in cases where you must process a large number of records in the forward direction only (such as for report generation). For operations that are likely to return more than 10000 records it is recommended that you use ForwardOnly.</p> <p>For more information on executing queries, see the topic on the ExecuteQuery business component method in <i>Integration Platform Technologies: Siebel Enterprise Application Integration</i>.</p>	View the WSDL by clicking the Related Files link next to the link for <i>Siebel CRM Web Services Reference</i> on the Siebel documentation library.
LOVLanguageMode	LIC Language Independent Code or LDC Language Dependent Code.	String
ViewMode	<p>The default view mode is All. The visibility mode is applied to the business object. Valid values are: Manager, Sales Rep, Personal, Organization, Sub-Organization, Group, Catalog, and All.</p> <p>NOTE: The ViewMode user property used on the integration object has priority over the ViewMode method argument.</p>	Complex Type
Contact	Corresponds to a record in SS_Contacts_IO. Set the operation accordingly. If Contact details require an update, or if child elements such as Personal Address are present, use the Update operation. Otherwise, set the operation to SkipNode.	String
Contact /Id	ID of the Contact. Set this if the mode on Contact node is Update or SkipNode.	String

Table 1011.Request Message Description: SelfServiceContactExecute

Node	Description	Type
Contact /ListOfAccount	<p>Container element for the assigned accounts of this contact.</p> <p>If the mode on the Contact is Insert, then the accounts specified in this list are inserted and assigned to the newly created contact.</p> <p>If the mode on Contact is Skipnode, then accounts specified in this list are made as the only accounts assigned for this contact. All other existing assigned accounts are unassigned by default.</p>	String
Contact /ListOfAccount/ Account	Contact account	String
Contact /ListOfAccount/ Account/ Name, PrimaryContactId, Type	Details of the assigned account.	String
Contact/ ListOfContactCommunicationAd dress	Contact address.	String
Contact / ListOfContactCommunicationAd dress / ContactCommunicationAddress / AlternateEmailAddress	Alternate email address value to be edited or created.	String
Contact / ListOfContactCommunicationAd dress / ContactCommunicationAddress /CommunicationAddressId	ID of the alternate email address value to be edited; blank for adding new alternate email address.	String

Response Message Description: SelfServiceContactExecute

For a description of this response message, see [Table 1012](#).

Table 1012. Response Message Description: SelfServiceContactQueryExecute

Node	Description	Type
SelfServiceContactExecute_Output	Container element for the Execute Operation request.	Complex Type
ListOfSSContact	Corresponds to an instance of SS_Contacts_IO.	View the WSDL by clicking the Related Files link next to the link for <i>Siebel CRM Web Services Reference</i> on the Siebel documentation library.
ListOfSSContact/Contact/Id, ModId	ID and ModId of Inserted, or Updated Contact Record.	String
ListOfSSContact/Contact/ListOfAccount/Account/Id, Mod Id	ID and ModId of Inserted, or Updated Account Record.	String
ListOfSSContact/Contact/ListOfCommunicationAddress/CommunicationAddress/Id, Mod Id	ID and ModId of Inserted, or Updated CommunicationAddress Record.	String

Request Message Description: SelfServiceContactQueryPage

For a description of this request message, see [Table 1013](#).

Table 1013. Request Message Description: SelfServiceContactQueryPage

Node	Description	Type
SelfServiceContactQueryPage_Input	Container element for the QueryPage Operation request.	Complex Type
ListOfSSContact	Corresponds to an instance of SS_Contacts_IO.	View the WSDL by clicking the Related Files link next to the link for <i>Siebel CRM Web Services Reference</i> on the Siebel documentation library.

Table 1013.Request Message Description: SelfServiceContactQueryPage

Node	Description	Type
ListOfSSContact/Contact	Set contact information.	Complex Type
Contact/ Id	Set the ID of the Contact as a ViewCriteria.	View the WSDL by clicking the Related Files link next to the link for <i>Siebel CRM Web Services Reference</i> on the Siebel documentation library.
Contact/ ModId	Retrieve and pass back while updating, to make sure that Contact record is not updated in the interim.	Complex Type
Contact/ FirstName, MiddleName, LastName, Status, EmailAddress, CellularPhone, HomePhone, FaxPhone, WorkPhone, TimeZoneId, EmailSRUpdatesFlag, SendPromotions	Empty (Columns to be retrieved).	View the WSDL by clicking the Related Files link next to the link for <i>Siebel CRM Web Services Reference</i> on the Siebel documentation library.
Contact/ LoginName, ApprovalStatus, ChallengeQuestion, ChallengeAnswer	Empty (Columns to be retrieved). These columns are related to the username information.	String
Contact/ PrimaryAccountName, PrimaryAddressId, PrimaryAddressName PrimaryPersonalAddressId	Empty (Columns to be retrieved).	String
Contact/ ListOfContactCommunicationAddress	Container element for the AlternateEmailAddress to be retrieved. Contact can have similar subnodes for querying PersonalAddress, Account and AccountBusinessAddress.	String

Table 1013.Request Message Description: SelfServiceContactQueryPage

Node	Description	Type
Contact / ListOfContactCommunicationAddress /ContactCommunicationAddress	Contact communications address.	String
Contact / ListOfContactCommunicationAddress /ContactCommunicationAddress / AlternateEmailAddress	Empty (Columns to be retrieved). Alternate Email Address of the contact.	String
Contact / ListOfContactCommunicationAddress /ContactCommunicationAddress / CommunicationAddressId	Empty (Columns to be retrieved). ID of the Alternate Email Address of the contact.	Complex Type
ExecutionMode	ForwardOnly.	View the WSDL by clicking the Related Files link next to the link for <i>Siebel CRM Web Services Reference</i> on the Siebel documentation library.
LOVLanguageMode	LIC Language Independent Code or LDC Language Dependent Code.	String
ViewMode	All.	Complex Type

Response Message Description: SelfServiceContactQueryPage

For a description of this response message, see [Table 1014](#).

Table 1014. Response Message Description: SelfServiceContactQueryPage

Node	Description	Type
SelfServiceContactQueryPage_Output	Container element for the QueryPage Operation response.	Complex Type
ListOfSSContact	Corresponds to an instance of SS_Contacts_IO.	View the WSDL by clicking the Related Files link next to the link for <i>Siebel CRM Web Services Reference</i> on the Siebel documentation library.
ListOfSSContact/Contact	Set contact information.	Complex Type
Contact/ Id	ID of the Contact being queried.	View the WSDL by clicking the Related Files link next to the link for <i>Siebel CRM Web Services Reference</i> on the Siebel documentation library.
Contact/ ModId	Container element for the QueryPage Operation response.	Complex Type
Contact/ FirstName, MiddleName, LastName, Status, EmailAddress, CellularPhone, HomePhone, FaxPhone, WorkPhone, TimeZoneId, EmailSRUpdatesFlag, SendPromotions	Primitive details of the contact. EmailSRUpdatesFlag and SendPromotions contain the preferences shown in Siebel Self-Service Applications version 8.1 Registration screens.	View the WSDL by clicking the Related Files link next to the link for <i>Siebel CRM Web Services Reference</i> on the Siebel documentation library.
Contact/ LoginName, ApprovalStatus, ChallengeQuestion, ChallengeAnswer	These nodes contain the values for the username information.	String

Table 1014. Response Message Description: SelfServiceContactQueryPage

Node	Description	Type
Contact/ PrimaryAccountName, PrimaryAddressId, PrimaryAddressName PrimaryPersonalAddressId	These nodes contain the values for the PrimaryAccountName, Primary BusinAddressId, Primary BusinessAddressName and PrimaryPersonalAddressId respectively.	String
Contact/ ListOfContactCommunicationAddress	Container element for the AlternateEmailAddress retrieved.	String
Contact / ListOfContactCommunicationAddress / ContactCommunicationAddress	Email address of the contact.	String
Contact / ListOfContactCommunicationAddress / ContactCommunicationAddress / AlternateEmailAddress	Alternate email address of the contact.	String
Contact / ListOfContactCommunicationAddress / ContactCommunicationAddress / CommunicationAddressId	ID of the alternate email address of the contact.	Complex Type
ExecutionMode	ForwardOnly.	View the WSDL by clicking the Related Files link next to the link for <i>Siebel CRM Web Services Reference</i> on the Siebel documentation library.
LOVLanguageMode	LDC.	String
ViewMode	All.	Complex Type

SelfServiceContact Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1015](#).

Table 1015. SelfServiceContact Service Object

Name	Boundary Object Type	Class
SelfServiceContact	BusinessService	CSSEAIUIDataService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1016](#).

Table 1016. SelfServiceContact Data Object

Siebel Repository Name	External Name
SS_Contacts_IO	SS_Contacts_IO

Example Package for SelfServiceContact

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request (SelfServiceContactQueryPage)

See the following file to view the sample code:

... \SelfServiceContact\SelfServiceContactQueryPage_request.xml

Response (SelfServiceContactQueryPage)

See the following file to view the sample code:

... \SelfServiceContact\SelfServiceContactQueryPage_request.xml

Request (SelfServiceContactExecute)

See the following file to view the sample code:

... \SelfServiceContact\SelfServiceContactExecute_request.xml

Response (SelfServiceContactExecute)

See the following file to view the sample code:

... \SelfServiceContact\SelfServiceContactExecute_request.xml

Interface Description (WSDL) for SelfServiceContact

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \SelfServiceContact\SelfServiceContact.wsdl

SelfServicePaymentHistory

This Web service queries the Payment History details as specified by the search criteria for any contact logged into the application. Payment details like Payment type, Payment profile, transaction amount, type and date for different orders against which the payment was made by a contact can be queried.

SelfServicePaymentHistory Operations

For a list of operations associated with this Web service, see [Table 1017](#).

Table 1017. SelfServicePaymentHistory Operations

Name	Description
SelfServicePaymentHistoryQueryPage	Performs query operations set on the SS_PaymentHistory_IO Integration Object as the input. this method is used for querying the payment details for different orders performed by a contact.

Request Message Description: SelfServicePaymentHistoryQueryPage

Based on the query criteria set on the integration object, payment related details like the payment profile details, transaction amount, type and date along with the order numbers can be queried. For a description of this request message, see [Table 1018](#).

Table 1018. Request Message Description: SelfServicePaymentHistoryQueryPage

Node	Description	Type
SelfServicePaymentHistoryQueryPage_Input	The method arguments are Payment Integration Object, Language Mode (value is LDC) and viewMode (All).	Integration Object

Response Message Description: SelfServicePaymentHistoryQueryPage

The response contains the details based on the query set on the Payment Integration Object. For a description of this response message, see [Table 1019](#).

Table 1019. Response Message Description: SelfServicePaymentHistoryQueryPage

Node	Description	Type
SelfServicePaymentHistoryQueryPage_Output	Integration Object	The retrieved data for the query performed.

SelfServicePaymentHistory Application Interface

This Web service makes available the EAI UI business service SelfServicePaymentHistory, which provides update and query operations on the integration object SS_PaymentHistory_IO. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1020](#).

Table 1020. SelfServicePaymentHistory Service Object

Name	Boundary Object Type	Class
SelfServicePaymentHistory	Integration Object	CSSEAIUIDataService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1021](#).

Table 1021. SelfServicePaymentHistory Data Object

Siebel Repository Name	External Name
SS_PaymentHistory_IO	Payments

Example Package for SelfServicePaymentHistory

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \SelfServicePaymentHistory\SelfServicePaymentHistoryRequest.xml
```

Response

See the following file to view the sample code:

```
... \SelfServicePaymentHistory\SelfServicePaymentHistoryResponse.xml
```

Interface Description (WSDL) for SelfServicePaymentHistory

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \SelfServicePaymentHistory\SelfServicePaymentHistory.wsdl
```

SelfServicePostLoginProcess

This Web service makes available the SelfServicePostLoginProcess workflow as LoadUserDetails operation. The response of this Web service is determined by the P_Mode request parameter, as displayed in [Table 1022](#).

P_Mode Request Parameter

For a description of the P_Mode request parameter, see [Table 1022](#).

Table 1022.P_Mode Request Parameter

P_Mode	Response
OnlyLoadResponsibilities	Returns only the responsibilities for the given user name.
SkipLoadResponsibilities	Returns only the contact details for the given user name.
LoadEverything	Returns both the contact details and responsibilities for the given user name.

SelfServicePostLoginProcess Operations

For a list of operations associated with this Web service, see [Table 1023](#).

Table 1023.SelfServicePostLoginProcess Operations

Name	Description
LoadUserDetails	This operation triggers the SelfServicePostLoginProcess workflow.

Request Message Description: LoadUserDetails

For a description of this request message, see [Table 1024](#).

Table 1024. Request Message Description: LoadUserDetails

Node	Description	Type
P_Mode	For a description, see Table 1022 .	String
ListOfSSContact	An SS_Contact_IO instance, where in ListOfSSContact/Contact/LoginName contains the username of the user for whom the details need to be retrieved.	Integration Object
P_LoginName	Refer to the SelfServiceContact.doc for the details on ListOfContact and its subnodes.	String
getUserResponsibilitiesResponse	Username of the user for whom the details need to be retrieved.	Complex Type
getUserResponsibilitiesResponse / listOfUserResponsibilities/	Container element for Responsibilities. Maps to an instance of getUserResponsibilitiesResponse integration object.	View the WSDL by clicking the Related Files link next to the link for <i>Siebel CRM Web Services Reference</i> on the Siebel documentation library.

Response Message Description: LoadUserDetails

For a description of this response message, see [Table 1025](#).

Table 1025. Response Message Description: LoadUserDetails

Node	Description	Type
LoadUserDetails_Output	Container element for the LoadUserDetails operation response.	Complex Type
ListOfSSContact	An SS_Contact_IO instance, where in ListOfSSContact/Contact/Id contains the contactId of the user for whom the details are retrieved.	View the WSDL by clicking the Related Files link next to the link for <i>Siebel CRM Web Services Reference</i> on the Siebel documentation library.
getUserResponsibilitiesResponse	Refer to the SelfServiceContact.doc for the other nodes in ListOfContact and its complex subnodes, like Account and PersonalAddress, which will have the retrieved accounts(assigned) and PersonalAddress of the contact respectively.	Complex Type
getUserResponsibilitiesResponse / listOfUserResponsibilities/ userResponsibilities/ responsibilityValue	Will be blank when mode is SkipLoadResponsibilities.	View the WSDL by clicking the Related Files link next to the link for <i>Siebel CRM Web Services Reference</i> on the Siebel documentation library.

Table 1025. Response Message Description: LoadUserDetails

Node	Description	Type
Error_spcCode	Name of the Responsibility.	Complex Type
Error_spcMessage	Error Code returned by the Workflow.	View the WSDL by clicking the Related Files link next to the link for <i>Siebel CRM Web Services Reference</i> on the Siebel documentation library.

SelfServicePostLoginProcess Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1026](#).

Table 1026. SelfServicePostLoginProcess Service Object

Name	Boundary Object Type
SelfServicePostLoginProcess	Workflow

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1027](#).

Table 1027. SelfServicePostLoginProcess Data Object

Siebel Repository Name	External Name
SelfServiceContact	SelfServiceContact
getUserResponsibilitiesResponse	getUserResponsibilitiesResponse

Example Package for SelfServicePostLoginProcess

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request (LoadUserDetails_OnlyLoadResponsibilities)

See the following file to view the sample code:

```
...\SelfServicePostLoginProcess\LoadUserDetails_OnlyLoadResponsibilities_request.xml
```

Response(LoadUserDetails_OnlyLoadResponsibilities)

See the following file to view the sample code:

```
...\SelfServicePostLoginProcess\LoadUserDetails_OnlyLoadResponsibilities_response.xml
```

Request (LoadUserDetails_SkipLoadResponsibilities)

See the following file to view the sample code:

```
...\SelfServicePostLoginProcess\LoadUserDetails_SkipLoadResponsibilities_request.xml
```

Response (LoadUserDetails_SkipLoadResponsibilities)

See the following file to view the sample code:

```
...\SelfServicePostLoginProcess\LoadUserDetails_SkipLoadResponsibilities_response.xml
```

Interface Description (WSDL) for SelfServicePostLoginProcess

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
...\SelfServicePostLoginProcess\SelfServicePostLoginProcess.wsdl
```

SelfServiceRegistration

The Enroll operation of this Web service invokes the SelfServiceRegistration workflow, which internally uses the business services listed below to manage contacts, assigned accounts, assigned personal, or business addresses, create user names, manage assigned responsibilities, send welcome or password update notifications and create Inbox Items to simulate pending registration approvals.

Activity of the workflow is determined by the P_mode input parameter passed to this Web service operation.

P_Mode Request Parameter

For a description of the P_Mode request parameter, see [Table 1028](#).

Table 1028.P_Mode Request Parameter

P_Mode	Response
CreateContact	Used for creating a contact without a username. Used in Siebel Self-ServiceSelf-Service Applications version 8.1 for contact creation in the Contacts, Administration screen, and other usages in the Contacts, Profile, and the Contacts, Account views.
UpdateContact	Used for updating a contact without a username. Used in Siebel Self-Service Applications version 8.1 in the Contacts, Administration screen, and the Contacts, Profile, and Contacts , Account views. Also used for Personal Info updating from Contacts, Profile view.
CreateUser	Creates a new contact, and a username in the associated LDAP directory, then assigns responsibilities, sends a welcome a notification to the user, and then creates an inbox item for the administrator, if approval is needed. Need to pass the Usertype details (like approval required), notification template, inbox and approval types, when the mode is CreateUser. Used in Siebel Self-Service Applications version 8.1 for making a contact as a user in the Contacts - Administration screen. Also used for all self-service registrations.
UpdateUser	Used for updating a contact with a username and manage the assigned accounts and responsibilities. Used in Siebel Self-Service Applications version 8.1 in the Contacts - Administration screen to update user information.
ResetPasswordOnly	Used for resetting the password of the currently logged in user of the Siebel application session or in the anonymous session. Also used in Forgot Password Flow (for an anonymous session).

SelfServiceRegistration Operations

For a list of operations associated with this Web service, see [Table 1029](#).

Table 1029.SelfServiceRegistration Operations

Name	Description
Enroll	Internally calls the business services listed below.

Business Services Called by Enroll Operation

The following business services are called by the Enroll operation:

- [EAITransactionService Business Service on page 498](#)
- [SelfServiceContact Business Service on page 498](#)
- [PRM ANI Utility Service Business Service on page 500](#)
- [PRM ANI Utility Service Business Service on page 500](#)
- [SiebelWebRegistrationService Business Service on page 501](#)
- [Self-Service User Business Service on page 502](#)
- [EAITransactionService Business Service on page 503](#)
- [ISS Approval Bus Service Business Service on page 504](#)
- [Outbound Communications Manager Business Service on page 505](#)
- [SessionAccessService Business Service on page 505](#)

EAITransactionService Business Service

For a description of this business service, see [Table 1030](#).

Table 1030.EAITransactionService Business Service

EAITransactionService	
Business Service Step	Begin Transaction
Business Service Name	EAITransactionService
Business Service Method	Begin Transaction
Description	This step is used to initiate a transaction. BeginTransaction will not take any parameters as input.

SelfServiceContact Business Service

For a description of this business service, see [Table 1031](#).

Table 1031.Self-ServiceSelf-Service Contact Business Service

SelfServiceContact	
Business Service Step	Create, and update contact and account records
Business Service Name	SelfServiceContact
Business Service Method	Execute
Input Arguments	

Table 1031. Self-ServiceSelf-Service Contact Business Service

SelfServiceContact		
Argument Name	Type	Property Name
SiebelMessageIn	Process Property	P_ContactIO(SS_Contacts_IO)
ViewMode	Process Property	All
LanguageMode	Process Property	LDC
ExecutionMode	Process Property	BiDirectional
Output Arguments		
Argument Name	Type	Property Name
SiebelMessageOut	Output Argument	P_ContactIO(SS_Contacts_IO)
Description	<p>This step is used to create or update Contact, Account, Contact Address, Contact_Account relationships and Alternate Communication Address. The Contact integration object with appropriate action specified at the request elements is prepared in the java layer and passed as a Process Property to the workflow.</p> <p>This step executes an EAIUI Service to execute the operations specified at each step in the integration object and returns a ContactIO with the ids specified for each step.</p> <p>Sample SOAP request portions of SS_Contacts_IO are shown below.</p>	

PRM ANI Utility Service Business Service

For a description of this business service, see [Table 1032](#).

Table 1032.PRM ANI Utility Service Business Service

PRM ANI Utility Service		
Business Service Step	Retrieve Contact ID	
Business Service Name	PRM ANI Utility Service	
Business Service Method	GetProperty	
Input Arguments		
Argument Name	Type	Property Name
Hierarchy Path:	Literal	Contact
Property Name	Literal	ID
SiebelMessage	Hierarchy	P_ContactIO(SS_Contacts_IO)
Output Arguments		
Argument Name	Type	Property Name
Property Value	Output Argument	P_ContactId
Description	<p>This step is used to retrieve the contact ID, given the contact IO.</p> <p>In Siebel Self-Service Applications version 8.1, this step is only applicable during the Register your company flow to retrieve the ID of the newly created corporate account, which is then sent to Trigger Approval, and established as the root account. Hence, the caller (java API that calls the proxy) shall ignore the errors reported by this step.</p>	

PRM ANI Utility Service Business Service

For a description of this business service, see [Table 1033](#).

Table 1033.PRM ANI Utility Service Business Service

PRM ANI Utility Service	
Business Service Step	Retrieve Account ID (called only when accountId Process Property is null)
Business Service Name	PRM ANI Utility Service
Business Service Method	GetProperty

Table 1033.PRM ANI Utility Service Business Service

PRM ANI Utility Service		
Input Arguments		
Argument Name	Type	Property Name
Hierarchy Path:	Literal	Contact
Property Name	Literal	Account ID
SiebelMessage	Hierarchy	P_ContactIO (SS_Contacts_IO)
Output Arguments		
Argument Name	Type	Property Name
Property Value	Output Argument	AccountId
Description	This step is used to retrieve the account ID, given the contact IO. In Siebel Self-Service Applications version 8.1, this step is only applicable during the Register your company flow to retrieve the ID of the newly created corporate account, which is then sent to Trigger Approval, and established as the root account. Hence, the caller (java API that calls the proxy) shall ignore the errors reported by this step.	

SiebelWebRegistrationService Business Service

For a description of this business service, see [Table 1034](#).

Table 1034.SiebelWebRegistrationService Business Service

SiebelWebRegistrationService	
Business Service Step	Create User
Business Service Name	SiebelWebRegistrationService
Business Service Method	Promote
Input Arguments	
Argument Name	Property Name
Contactid	P_ContactId
Type	P_Usertype
Proxy User	P_ProxyEmpLoginName
LoginName	P_LoginName
Password	P_NewPassword
securityQuestion	P_ChallengeQuestion

Table 1034.SiebelWebRegistrationService Business Service

SiebelWebRegistrationService		
securityAnswer	Process Property	P_ChallengeAnswer
Output Arguments		
Argument Name	Type	Property Name
SuccessCode	Output Argument	P_CreateUserStatus
ErrorMessage	Output Argument	Error Message
Description	This step executes the SiebelWebRegistrationService business service to create a Web_User for the given contactid. The business service needs to create Web Channel User of Web User Type, LDAP user record, S_USER record and also update the security question and answer.	

Self-Service User Business Service

For a description of this business service, see [Table 1035](#).

Table 1035.Self-Service User Business Service

Self-Service User	
Business Service Step	Assign Responsibilities
Business Service Name	SelfServiceUser
Business Service Method	Execute
Input Arguments	
Argument Name	Property Name
SiebelMessageIn	P_UserIO
ViewMode	All
LanguageMode	LDC
Output Arguments	
Argument Name	Property Name
SiebelMessageOut	P_UserIO
Description	This step is used to create the responsibilities in the Siebel database. It uses a new EAIUI Service named SelfServiceUser that creates the S_PER_RESP records for the given user ID and the responsibility ID.

EAITransactionService Business Service

For a description of this business service, see [Table 1036](#).

Table 1036.EAITransactionService Business Service

EAITransactionService		
Business Service Step	Commit Transaction	
Business Service Name	EAITransactionService	
Business Service Method	EndTransaction	
Input Arguments		
Argument Name	Type	Property Name
Is Abort	Literal	False
Description	This step uses EAITransactionService. EndTransaction to commit the transaction. The parameter <i>Is Abort</i> need be set to False to commit the transaction.	

ISS Approval Bus Service Business Service

For a description of this business service, see [Table 1037](#).

Table 1037.ISS Approval Bus Service Business Service

ISS Approval Bus Service		
Business Service Step	Trigger Approval	
Business Service Name	ISS Approval Bus Service	
Business Service Method	CreateNewApprovalTasks	
Input Arguments		
Argument Name	Type	Property Name
RequestingBusComp	Literal	Value = Contact
Approval Item ID	Process Property	P_ContactId
Approval Level Name	Process Property	P_UsertypeApprovalType
Inbox Type	Process Property	P_UsertypeInboxType
Approval Level Context	Process Property	P_AccountId
Description	<p>This step uses ISS Approval Bus Service. CreateNewApprovalTasks business service method to create new Inbox Items based on the Inbox Type and Approval Types specified. This step is executed only if approval is required by the user type, based on the P_UsertypeApprovalRequd process property.</p> <p>Note that P_AccountId contains the root account of the corporate account under which the contact, or user is being created. Hence, for newly created corporate account (Register your company flow), P_AccountId is set to the ID of the newly created account.</p> <p>For more information, see <i>Siebel Self-Service Application Developer's Guide</i>.</p>	

Outbound Communications Manager Business Service

For a description of this business service, see [Table 1038](#).

Table 1038.Outbound Communications Manager Business Service

Outbound Communications Manager		
Business Service Step	Trigger Notification	
Business Service Name	Outbound Communications Manager	
Business Service Method	CreateRequest	
Input Arguments		
Argument Name	Type	Property Name
RecipientBusComp	Literal	Not applicable
SourceIdList	Process Property	P_ContactId
PackageNameList	Process Property	P_NotificationTemplateName
RequestLanguageCode	Process Property	P_Language
RequestLocaleCode	Process Property	P_Locale
ProcessMode	Literal	Not applicable
RequestName	Literal	Not applicable
RecipientGroup	Process Property	Not applicable
Description	This step is used to trigger the notification based on the notification template specified, using the Outbound Communications Manager. CreateRequest. This business service method substitutes the necessary values from the Contact business component which is loaded for the ID specified. For more information, see <i>Siebel Self-Service Application Developer's Guide</i> .	

SessionAccessService Business Service

For a description of this business service, see [Table 1039](#).

Table 1039.SessionAccessService Business Service

SessionAccessService	
Business Service Step	Set new password in Siebel session
Business Service Name	SessionAccessService

Table 1039.SessionAccessService Business Service

SessionAccessService		
Business Service Method	SetProfileAttr	
Input Arguments		
Argument Name	Type	Property Name
Name	Literal	Not applicable
Value	Process Property	P_NewPassword
PackageNameList	Process Property	P_NotificationTemplateName
RequestLanguageCode	Process Property	P_Language
RequestLocaleCode	Process Property	P_Locale
ProcessMode	Literal	Not applicable
RequestName	Literal	Not applicable
RecipientGroup	Process Property	Not applicable
Description	This step is used to set the password in a Siebel CRM session. For more information, see <i>Siebel Self-Service Application Developer's Guide</i> .	

Response Message Description: CreateContact

For a description of this business service, see [Table 1040](#).

Table 1040.Response Message Description: CreateContact

Node	Description	Type
Process_spcInstance_spcId	Not of consequence in response.	String
Object_spcId	Not of consequence in response.	String
Siebel_spcOperation_spcObject_spcId	Not of consequence in response.	String
Error_spcCode	Not of consequence in response.	String
Error_spcMessage	Not of consequence in response.	String
ListOfSSContact	Contains an instance of the output integration object SS_Contacts_IO that holds the ID and ModId of the contact, and or account that is created or updated. See " SelfServiceContact " on page 481 for more information on the Structure and subnodes of ListOfSSContact. Maps to the P_ContactIO process property in the workflow.	Integration Object
P_ContactId	Not of consequence in response.	String

Table 1040. Response Message Description: CreateContact

Node	Description	Type
P_AccountId	Derived Root Account ID For more information, see <i>Siebel Self-Service Application Developer's Guide</i> on the <i>Siebel Bookshelf</i> .	String
P_DefaultOrgId	Not of consequence in response.	String
P_Mode	Not of consequence in response.	String
P_Usertype	Not of consequence in response.	String
P_LoginName	Username created	String
P_DefaultProxyEmployee	Not of consequence in response.	String
P_LoginId	Value returned by SiebelWebRegistration business service.	String
P_CreateUserStatus	The status set on the newly created user. Inactive, for pending users.	String
P_Password	Not of consequence in response.	String
P_NewPassword	Not of consequence in response.	String
P_ChallengeQuestion	Not of consequence in response.	String
P_ChallengeAnswer	Not of consequence in response.	String
ListOfSSUser	Contains an instance of the input integration object Users that holds the ID and Mode ID of the user-responsibility mapping for the updated responsibility assignments. See "SelfServiceUser" on page 519 for more information on the structure and subnodes of ListOfSSUser. Maps to the P_UserIO process property in the workflow.	Integration Object
P_UsertypeApprovalReqd	Not of consequence in response.	String
P_UsertypeApprovalType	Not of consequence in response.	String
P_UsertypeInboxType	Not of consequence in response.	String
P_UsertypeNotifTemplateName	Not of consequence in response.	String
P_RecipientGroup	Not of consequence in response.	String
P_Language	Not of consequence in response.	String
P_Locale	Not of consequence in response.	String

Self-Service Registration Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1041](#).

Table 1041. Self-Service Registration Service Object

Name	Boundary Object Type
SelfServiceRegistration	Workflow

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1042](#).

Table 1042. Self-Service Registration Data Object

Siebel Repository Name	External Name
SelfServiceContact	SelfServiceContact
Users	Users

Example Package for SelfServiceRegistration

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request and Response Samples are provided for the following scenarios:

- 1 Create a B2C contact and a user name and trigger notification.
- 2 Create a B2B contact as Inactive and create a user name and trigger notification and create Inbox Items for approval.
- 3 Update Personal addresses of an existing Contact.
- 4 Update Contact details, Account Assignments, Responsibility Assignments, Password resetting for an existing contact.

Request

Create a B2C contact and user name and trigger notification.

See the following file to view the sample code:

...\SelfServiceRegistration\SelfServiceRegistration_1_request.xml

Response

Create a B2C contact and user name and trigger notification.

See the following file to view the sample code:

... \SelfServiceRegistration\SelfServiceRegistration_1_request.xml

Request

Create a B2B contact as Inactive and create a user name and trigger notification and create Inbox Items for approval.

See the following file to view the sample code:

... \SelfServiceRegistration\SelfServiceRegistration_2_request.xml

Response

Create a B2B contact as Inactive and create a user name and trigger notification and create Inbox Items for approval.

See the following file to view the sample code:

... \SelfServiceRegistration\SelfServiceRegistration_2_response.xml

Request

Update Personal Addresses of an existing contact.

See the following file to view the sample code:

... \SelfServiceRegistration\SelfServiceRegistration_3_request.xml

Response

Update Personal Addresses of an existing contact.

See the following file to view the sample code:

... \SelfServiceRegistration\SelfServiceRegistration_3_response.xml

Request

Update Contact Details, Account Assignment, Responsibility Assignment, Password resetting for an existing contact.

See the following file to view the sample code:

... \SelfServiceRegistration\SelfServiceRegistration_4_request.xml

Response

Update Contact Details, Account Assignment, Responsibility Assignment, Password resetting for an existing contact

See the following file to view the sample code:

...\SelfServiceRegistration\SelfServiceRegistration_4_response.xml

Interface Description (WSDL) for SelfServiceRegistration

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

...\SelfServiceRegistration\SelfServiceRegistration.wsdl

SelfServiceResponsibility

This Web service makes available the EAI UI business service SelfServiceResponsibility, which provides a query operation on the integration object SS_Responsibility_IO. Additionally, this Web service makes available the Query Method in the SelfServiceResponsibility business service as a Web service operation.

SelfServiceResponsibility Operations

For a list of operations associated with this Web service, see [Table 1043](#).

Table 1043. SelfServiceResponsibility Operations

Name	Description
SelfServiceResponsibilityQueryPage	Performs Query operation based on the view criteria and search specification set on the instance of SS_Responsibility_IO provided as input. This operation is used in Siebel Self-Service Applications version 8.1 for retrieving the ID and Name of Web Enabled Responsibilities.

Request Message Description: SelfServiceResponsibilityQueryPage

For a description of this request message, see [Table 1044](#).

Table 1044. Request Message Description: SelfServiceResponsibilityQueryPage

Node	Description
SelfServiceResponsibilityQueryPage_Input	Container element for SelfServiceResponsibility Web service input for QueryPage operation.
ListOfSSResponsibility	Container element for the list of SS_Responsibility_IO. Corresponds to an SS_Responsibility_IO integration object.
ListOfSSResponsibility/Responsibility	Corresponds to the primary integration component Responsibility.
ListOfSSResponsibility/Responsibility/AccessType	Set to Yes, for retrieving only Web Enabled Responsibilities.

Table 1044.Request Message Description: SelfServiceResponsibilityQueryPage

Node	Description
ListOfSSResponsibility/Responsibility/Id	Empty; Placeholder for the ID of the responsibility to be retrieved.
ListOfSSResponsibility/Responsibility/Name	Empty; Placeholder for the name of the responsibility to be retrieved.

Response Message Description: SelfServiceResponsibilityQueryPage

For a description of this response message, see [Table 1045](#).

Table 1045.Response Message Description: SelfServiceResponsibilityQueryPage

Node	Description
SelfServiceResponsibilityQueryPage_Output	Container element for SelfServiceResponsibility Web service output for QueryPage operation.
ListOfSSResponsibility	Container element for the list of SS_Responsibility_IO. Corresponds to an SS_Responsibility_IO integration object.
ListOfSSResponsibility/Responsibility	Corresponds to the primary Integration component Responsibility.
ListOfSSResponsibility/Responsibility/AccessType	Yes for Web Enabled Responsibility.
ListOfSSResponsibility/Responsibility/Id	Retrieved ID of the responsibility.
ListOfSSResponsibility/Responsibility/Name	Retrieved name of the responsibility.

SelfServiceResponsibility Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1046](#).

Table 1046.SelfServiceResponsibility Service Object

Name	Boundary Object Type	Class
SelfServiceResponsibility	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1047](#).

Table 1047.SelfServiceResponsibility Data Object

Siebel Repository Name	External Name
SS_Responsibility_IO	SS_Responsibility_IO

Example Package for SelfServiceResponsibility

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

...\SelfServiceResponsibility\SelfServiceResponsibility_request.xml

Response

See the following file to view the sample code:

...\SelfServiceResponsibility\SelfServiceResponsibility_response.xml

Interface Description (WSDL) for SelfServiceResponsibility

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

...\SelfServiceResponsibility\SelfServiceResponsibility.wsdl

SelfServiceSmtpEmail

The SendSmtpEmail operation of this Web service invokes the SelfServiceSmtpEmail workflow, which internally uses the Outbound Communications Manager business service for sending non-template based SMTP email.

SelfServiceSmtpEmail Operations

For a list of operations associated with this Web service, see [Table 1048](#).

Table 1048.SelfServiceSmtpEmail Operations

Name	Description
SendSmtpEmail	Invokes the SelfServiceSmtpEmail workflow.

Request Message Description: SendSmtEmail

For a description of this request message, see [Table 1049](#).

Table 1049.Request Message Description: SendSmtEmail

Node	Description	Type
FromAddress	Email address of the sender.	String
MessageToList	Semicolon-separated list of email addresses for the TO line.	String
MessageCCList	Semicolon-separated list of email addresses for the CC line.	String
MessageBCCList	Semicolon-separated list of email addresses for the BCC line.	String
MessageSubject	Descriptive subject line for the message.	String
MessageBody	Message content in plain-text.	String
MessageHTMLBody	Message content in HTML. This parameter when specified would override the parameter MessageBody.	String
Error Code	Error code, if any.	String
Error Message	Error message, if any.	String
Object Id	Object ID.	String
Process Instance Id	ID of process instance.	String
Siebel Operation Object Id	ID of Siebel operation.	String

Response Message Description: SendSmtEmail

For a description of this response message, see [Table 1050](#).

Table 1050.Response Message Description: SendSmtEmail

Node	Description	Type
FromAddress	Not of consequence in response.	String
MessageToList	Not of consequence in response.	String
MessageCCList	Not of consequence in response.	String
MessageBCCList	Not of consequence in response.	String
MessageSubject	Not of consequence in response.	String
MessageBody	Not of consequence in response.	String
MessageHTMLBody	Not of consequence in response.	String
Error Code	Error code, if any, for exceptions raised while submitting the request. This is automatically set from the workflow.	String
Error Message	Error details, if any, for exceptions raised while submitting the request. This is automatically set from the workflow.	String

Table 1050. Response Message Description: SendSmtpEmail

Node	Description	Type
Object Id	Standard WF Output.	String
Process Instance Id	Standard WF Output.	String
Siebel Operation Object Id	Standard WF Output.	String

SelfServiceSmtpEmail Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1051](#).

Table 1051. SelfServiceSmtpEmail Service Object

Name	Boundary Object Type
SelfServiceSmtpEmail	Workflow Process

Example Package for SelfServiceSmtpEmail

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \SelfServiceSmtpEmail\SelfServiceSmtpEmail_request.xml
```

Response

See the following file to view the sample code:

```
... \SelfServiceSmtpEmail\SelfServiceSmtpEmail_response.xml
```

Interface Description (WSDL) for SelfServiceSmtpEmail

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \SelfServiceSmtpEmail\SelfServiceSmtpEmail.wsdl
```

SelfServiceTemplateEmail

The SendTemplateEmail operation of this Web Service invokes the SelfServiceTemplateEmail workflow, which internally uses the Outbound Communications Manager business service for sending template based SMTP email.

SelfServiceTemplateEmail Operations

For a list of operations associated with this Web service, see [Table 1052](#).

Table 1052. SelfServiceTemplateEmail Operations

Name	Description
SendTemplateEmail	Invokes the SelfServiceTemplateEmail workflow.

Request Message Description: SendTemplateEmail

For a description of this request message, see [Table 1053](#).

Table 1053. Request Message Description: SendTemplateEmail

Node	Description	Type
TemplateName	The communication template name to be used in the request.	String
SourceRecipientGroupName	The source recipient group name. Either the name of Siebel-seeded recipient group or a custom one.	String
SourceObjectID	ROW_ID of the source object component of the recipient group. This would determine the data retrieved for processing the template and recipient address for the email.	String
TemplateLanguageCode	Language code the template. A template must exist with the name and language combination specified. Defaulting is not recommended.	String
TemplateLocaleCode	Locale code the template. A template must exist with the name and locale combination specified. Defaulting is not recommended.	String
RequestName	An optional string that would help trace the outbound communication requests at the server side.	String
RequestStatus	Status code for the outbound request placed.	String
Error Code	None	String
Error Message	None	String
Object Id	None	String

Table 1053.Request Message Description: SendTemplateEmail

Node	Description	Type
Process Instance Id	None	String
Siebel Operation Object Id	None	String

Response Message Description: SendTemplateEmail

For a description of this response message, see [Table 1054](#).

Table 1054.Response Message Description: SendTemplateEmail

Node	Description	Type
TemplateName	Not of consequence in response.	String
SourceRecipientGroupName	Not of consequence in response.	String
SourceObjectID	Not of consequence in response.	String
TemplateLanguageCode	Not of consequence in response.	String
TemplateLocaleCode	Not of consequence in response.	String
RequestName	Not of consequence in response.	String
RequestStatus	Not of consequence in response.	String
Error Code	Error code, if any, for exceptions raised while submitting the request. This is automatically set from the workflow.	String
Error Message	Error details, if any, for exceptions raised while submitting the request. This is automatically set from the workflow.	String
Object Id	Standard WF Output.	String
Process Instance Id	Standard WF Output.	String
Siebel Operation Object Id	Standard WF Output.	String

SelfServiceTemplateEmail Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1055](#).

Table 1055.SelfServiceTemplateEmail Service Object

Name	Boundary Object Type
SelfServiceTemplateEmail	Workflow Process

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1056](#).

Table 1056.SelfServiceTemplateEmail Data Object

Siebel Repository Name	External Name
Not applicable	Not applicable

Example Package for SelfServiceTemplateEmail

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \SelfServiceTemplateEmail\SelfServiceTemplateEmail_request.xml
```

Response

See the following file to view the sample code:

```
... \SelfServiceTemplateEmail\SelfServiceTemplateEmail_response.xml
```

Interface Description (WSDL) for SelfServiceTemplateEmail

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \SelfServiceTemplateEmail\SelfServiceTemplateEmail.wsdl
```

SelfServiceTimeZone

Use this Web service to retrieve all the Siebel time zone values. These values are retrieved in the session language if it is a locale that is supported by Siebel CRM. If not, the values are retrieved in the base language. The language is set using the search specification.

SelfServiceTimeZone Operations

For a list of operations associated with this Web service, see [Table 1057](#).

Table 1057. SelfServiceTimeZone Operations

Name	Description
SelfServiceTimeZoneQueryPage	Performs query operations based on the search specification set on the language as input. This operation is used to get the Siebel time zone values based on the language which is set in the search specification.

Request Message Description: SelfServiceTimeZoneQueryPage

For a description of this request message, see [Table 1058](#).

Table 1058. Request Message Description: SelfServiceTimeZoneQueryPage

Node	Description	Type
SelfServiceTimeZoneQueryPage_Input	The method arguments are the TimeZone integration object with query parameters set, Language Mode as LDC and viewMode (All).	Integration Object

Response Message Description: SelfServiceTimeZoneQueryPage

For a description of this response message, see [Table 1059](#).

Table 1059. Response Message Description: SelfServiceTimeZoneQueryPage

Node	Description	Type
SelfServiceTimeZoneQueryPage_Output	The list of the time zone values that are returned in the language that is set in the search specification.	Integration Object

SelfServiceTimeZone Application Interface

This topic describes the application objects called by the SelfServiceTimeZone. This Web service makes available the business service SelfServiceTimeZone which provides query operation on the integration object SS_TimeZone_IO.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1060](#).

Table 1060. SelfServiceTimeZone Service Object

Name	Boundary Object Type	Class
SelfServiceTimeZone	Integration Object	CSSEAIUIDataService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1061](#).

Table 1061.SelfServiceTimeZone Data Object

Siebel Repository Name	External Name
SS_TimeZone_IO	Time Zone

Example Package for SelfServiceTimeZone

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \SelfServiceTimeZone\SelfServiceTimeZone_request.xml
```

Response

See the following file to view the sample code:

```
... \SelfServiceTimeZone\SelfServiceTimeZone\_response.xml
```

Interface Description (WSDL) for SelfServiceTimeZone

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \SelfServiceTimeZone\SelfServiceTimeZone.wsdl
```

SelfServiceUser

This Web service makes available the EAI UI business service SelfServiceUser, which provides CRUD and query operations on the integration object Users. Additionally, this Web service makes available the Execute and Query methods in the SelfServiceUser business service as Web service operations.

SelfServiceUser Operations

For a list of operations associated with this Web service, see [Table 1062](#).

Table 1062. SelfServiceUser Operations

Name	Description
SelfServiceUserExecute	<p>Performs CRUD operations on the instance of the Users integration object provided as input.</p> <p>Though Siebel Self-Service Applications, version 8.1 do not use this Web service operation for managing responsibilities of a user, the SelfServiceRegistration Workflow used instead, uses the same business service (SelfServiceUser) internally.</p>
SelfServiceUserQueryPage	<p>Performs Query operation based on the view criteria and search specifications set on the instance of Users integration object provided as input.</p> <p>This operation is used in Siebel Self-Service Applications, version 8.1 for retrieving the responsibilities of the users in delegated administration.</p>

Request Message Description: SelfServiceUserExecute

For a description of this request message, see [Table 1063](#).

Table 1063. Request Message Description: SelfServiceUserExecute

Node	Description
SelfServiceUserExecute_Input	Container element for SelfServiceUser Web service input for Execute operation.
ListOfSSUser	Container element for the list of users. Corresponds to a User integration object.
ListOfSSUser/User	Corresponds to the primary integration component User. Set the mode as skipnode for adding, or removing responsibilities of the user.
ListOfSSUser/User/LoginName	Set the user name for which the associated responsibilities need to be reset.
ListOfSSUser/User/ ListOfSSUserResponsibility	Container element for User_Responsibility integration component.
ListOfSSUser/User/ ListOfSSUserResponsibility/ SSUserResponsibility	Corresponds to the User_Responsibility integration component. Represents a responsibility association, for each responsibility to be added and or retained with the user. Earlier assigned responsibilities that are not listed here are deleted by default.
ListOfSSUser/User/ ListOfSSUserResponsibility/ SSUserResponsibility/Id	Set the ID of the responsibility to be assigned and or retained to the user.

Response Message Description: SelfServiceUserExecute

For a description of this response message, see [Table 1064](#).

Table 1064. Response Message Description: SelfServiceUserExecute

Node	Description
SelfServiceUserExecute_Output	Container element for SelfServiceUser Web service output for Execute operation.
ListOfSSUser	Container element for the list of Users. Corresponds to a Users integration object.
ListOfSSUser/User	Corresponds to the primary integration component User.
ListOfSSUser/User/LoginName	User name for which the assigned responsibilities are updated.
ListOfSSUser/User/ ListOfSSUserResponsibility	Container element for User_Responsibility integration component.
ListOfSSUser/User/ ListOfSSUserResponsibility/ SSUserResponsibility	Corresponds to the User_Responsibility integration component. Each entry represents a responsibility assigned to the user.
ListOfSSUser/User/ ListOfSSUserResponsibility/ SSUserResponsibility/Id	ID of the responsibility assigned to the user.

Request Message Description: SelfServiceUserQueryPage

For a description of this request message, see [Table 1065](#).

Table 1065. Request Message Description: SelfServiceUserQueryPage

Node	Description
SelfServiceUserQueryPage_Input	Container element for SelfServiceUser Web service input for QueryPage operation.
ListOfSSUser	Container element for the list of Users. Corresponds to a Users integration object.
ListOfSSUser/User	Corresponds to the primary integration component User.
ListOfSSUser/User/LoginName	Set the Username for which the associated responsibilities needs to be loaded.
ListOfSSUser/User/ ListOfSSUserResponsibility	Container element for User_Responsibility integration component.
ListOfSSUser/User/ ListOfSSUserResponsibility/ SSUserResponsibility	Corresponds to the User_Responsibility integration component. Represents a responsibility associated to the user.

Table 1065. Request Message Description: SelfServiceUserQueryPage

Node	Description
ListOfSSUser/User/ ListOfSSUserResponsibility/ SSUserResponsibility/Id	Empty; to query the ID of the responsibility assigned to the user.
ListOfSSUser/User/ ListOfSSUserResponsibility/ SSUserResponsibility/Responsibility	Empty; to query the Name of the responsibility assigned to the user.

Response Message Description: SelfServiceUserQueryPage

For a description of this response message, see [Table 1066](#).

Table 1066. Response Message Description: SelfServiceUserQueryPage

Node	Description
SelfServiceUserQueryPage_Output	Container element for SelfServiceUser Web service output for QueryPage operation.
ListOfSSUser	Container element for the list of Users. Corresponds to a Users integration object.
ListOfSSUser/User	Corresponds to the primary integration component User.
ListOfSSUser/User/LoginName	User name for which the assigned responsibilities are retrieved.
ListOfSSUser/User/ ListOfSSUserResponsibility	Container element for User_Responsibility integration component.
ListOfSSUser/User/ ListOfSSUserResponsibility/ SSUserResponsibility	Corresponds to the User_Responsibility integration component. Each entry represents a responsibility assigned to the user.
ListOfSSUser/User/ ListOfSSUserResponsibility/ SSUserResponsibility/Id	ID of the responsibility assigned to the user.
ListOfSSUser/User/ ListOfSSUserResponsibility/ SSUserResponsibility/Responsibility	Name of the responsibility assigned to the user.

SelfServiceUser Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1067](#).

Table 1067. SelfServiceUser Service Object

Name	Boundary Object Type	Class
SelfServiceUser	BusinessService	CSSEAIUIDataService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1068](#).

Table 1068. SelfServiceUser Data Object

Siebel Repository Name	External Name
Users	Users

Example Package for SelfServiceUser

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \SelfServiceUser \SelfServiceUser_request.xml
```

Response

See the following file to view the sample code:

```
... \SelfServiceUser \SelfServiceUser_response.xml
```

Interface Description (WSDL) for SelfServiceUser

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \SelfServiceUser \SelfServiceUser.wsdl
```

SelfServiceWebSite

This Web service is used for creating, retrieving, updating, and deleting sites. It makes available two methods, Query and the Execute methods in its business service SelfServiceWebSite as Webservice operations.

SelfServiceWebSite Operations

For a list of operations associated with this Web service, see [Table 1069](#).

Table 1069. SelfServiceWebSite Operations

Name	Description
SelfServiceWebSiteExecute	Perform various operations such as creating, updating, or deleting of sites with SelfServiceWebSite integration object as the input.
SelfServiceWebSiteQueryPage	Performs query operations based on the querycriteria. set on SelfServiceWebSite integration object as the input. This operation is used to query for the site details.

Request Message Description: SelfServiceWebSiteExecute

Creating, updating, or deleting operations on a site can be performed based on the query criteria that is set. For a description of this request message, see [Table 1070](#).

Table 1070. Request Message Description: SelfServiceWebSiteExecute

Node	Description	Type
SelfServiceWebSiteExecute_Input	The method arguments are the Site integration object, Language Mode (value is LDC) and viewMode (All).	Integration Object

Response Message Description: SelfServiceWebSiteExecute

The response contains the details based on the query set on the Site integration object. For a description of this response message, see [Table 1071](#).

Table 1071. Response Message Description: SelfServiceWebSiteExecute

Node	Description	Type
SelfServiceWebSiteExecute_Output	The data retrieved based on the query set.	Integration Object

Request Message Description: SelfServiceWebSiteQueryPage

Based on the querycriteria set on the integration object, site related details are queried. For a description of this request message, see [Table 1072](#).

Table 1072. Request Message Description: SelfServiceWebSiteQueryPage

Node	Description	Type
SelfServiceWebSiteQueryPage_Input	The method arguments are Site integration object with query parameters set, Language Mode as LDC and viewMode (All).	Integration Object

Response Message Description: SelfServiceWebSiteQueryPage

The response contains the details based on the update query set on the Site integration object. For a description of this response message, see [Table 1073](#).

Table 1073. Response Message Description: SelfServiceWebSiteQueryPage

Node	Description	Type
SelfServiceTimeZoneQueryPage_Output	The list of the time zone values that are returned in the language that is set in the search specification.	Integration Object

SelfServiceWebSite Application Interface

This topic describes the application objects called by the SelfServiceWebSite Web service. This Web service makes available the business service SelfServiceWebSite, which provides execute and query operations on the integration object SS_WebSite_IO. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1074](#).

Table 1074. SelfServiceWebSite Service Object

Name	Boundary Object Type	Class
SelfServiceWebSite	Integration Object	CSSEAIUIDataService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1075](#).

Table 1075. SelfServiceWebSite Data Object

Siebel Repository Name	External Name
SS_WebSite_IO	SS_WebSite_BO

Example Package for SelfServiceWebSite

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request (SelfServiceWebSiteExecute)

See the following file to view the sample code:

```
... \SelfServiceWebSite\SelfServiceWebSiteExecute_request.xml
```

Response (SelfServiceWebSiteExecute)

See the following file to view the sample code:

...\SelfServiceWebSite\SelfServiceWebSiteExecute_response.xml

Request (SelfServiceWebSiteQuery)

See the following file to view the sample code:

...\SelfServiceWebSite\SelfServiceWebSiteQuery_request.xml

Response (SelfServiceWebSiteQuery)

See the following file to view the sample code:

...\SelfServiceWebSite\SelfServiceWebSiteQuery_response.xml

Interface Description (WSDL) for SelfServiceWebSite

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

...SelfServiceWebSiteQuery\SelfServiceWebSite.wsdl

ServiceRequest

Use this Web service to create, read, update the Service Request and to create, read, update, and delete the child objects like Activities, Attachments, Solutions and Service Request Agreements.

ServiceRequest Operations

For a list of operations associated with this Web service, see [Table 1076](#).

Table 1076. ServiceRequest Operations

Name	Description
ServiceReqInsert_Input	Used to create the service request.
ServiceReqUpdate_Input	Used to update the service request.
ServiceReqExecute_Input	Used to create and update the service request. Also this is used to create and Update child objects such as Activities, Attachment, Solution, Service Request Agreement.
ServiceReqQueryPage_Input	Used to query the service request and its child objects such as Activities, Attachment, Solution, Service Request Agreement.
ServiceReqInit_Input	Used to get the default values for the service request.
ServiceReqDelete_Input	Used to delete the child objects such as Activities, Attachment, Solution, Service Request Agreement.

Request Message Description: ServiceReqInsert_Input

For a description of this request message, see [Table 1077](#).

Table 1077.Request Message Description: ServiceReqInsert_Input

Node	Description
Abstract	Abstract of the service request.

Response Message Description: ServiceReqInsert_Input

For a description of this response message, see [Table 1078](#).

Table 1078.Response Message Description: ServiceReqInsert_Input

Node	Description
Id	Returns the Row_Id of the service request.
Mod_Id	Returns the Mod_Id of the service request.

Request Message Description: ServiceReqUpdate_Input

For a description of this request message, see [Table 1079](#).

Table 1079.Request Message Description: ServiceReqUpdate_Input

Node	Description
Id	Row ID of the service request is required.

Response Message Description: ServiceReqUpdate_Input

For a description of this response message, see [Table 1080](#).

Table 1080.Response Message Description: ServiceReqUpdate_Input

Node	Description
Id	Returns the Row_Id of the service request.
Mod_Id	Returns the Mod_Id of the service request.

Request Message Description: ServiceReqExecute_Input Request

For a description of this request message, see [Table 1081](#).

Table 1081.Request Message Description: ServiceReqExecute_Input Request

Node	Description
Service Request	
Id	Row ID of the service request.
Abstract	Abstract of the service request is required.

Table 1081.Request Message Description: ServiceReqExecute_Input Request

Node	Description
Activities	
Id	Row ID of the Aactivity.
Type	Type is required.
Description2	Description of the activity.
Attachment	
Id	Row ID of the attachment.
ActivityId	Activity ID of the attachment. In this case the Service Request ID.
ActivityComments	Comments for the attachment.
ActivityFileAutoUpdFlg	File Auto flag for the attachment.
ActivityFileDeferFlg	File Defer flag for the attachment.
ActivityFileDockReqFlg	File Dock Required flag for the attachment.
ActivityFileDockStatFlg	File Dock Status flag for the attachment.
ActivityFileSrcType	Type of the Attachment. Valid values are File or URL.
ActivityFileSrcPath	Location of the file or URL for the attachment.
ActivityFileName	File name for the attachment, in case of attachment type File.
ActivityFileRev	File Revision for the attachment, in case of attachment type File.
ActivityFileSize	File Size for the attachment, in case of attachment type File.
ActivityFileExt	File extension for the attachment, in case of attachment type File.
ActivityFileBuffer	Contents to be attached.
ActivityFileBuffer	Contents to be attached.
Solution	
Id	Row ID of the solution is required
Name	Name of the solution.
Agreement	
Id	Row ID of the agreement is required.
AgreementName	

Response Message Description: ServiceReqExecute_Input Request

For a description of this response message, see [Table 1082](#).

Table 1082. Response Message Description: ServiceReqExecute_Input Request

Node	Description
Id	Returns the Row_Id of the service request. The child object's Row ID is also returned.
Mod_Id	Returns the Mod_Id of the service request. The child object's Mod_Id is also returned.

Request Message Description: ServiceReqQueryPage_Input

For a description of this request message, see [Table 1083](#).

Table 1083. Request Message Description: ServiceReqQueryPage_Input

Node	Description
Id	Row ID of the service request.

Response Message Description: ServiceReqQueryPage_Input

For a description of this response message, see [Table 1084](#).

Table 1084. Response Message Description: ServiceReqQueryPage_Input

Node	Description
Service Request	Returns all the information of the service request.
Child Objects	Returns all the child information for that service request.

Request Message Description: ServiceReqInit_Input

For a description of this request message, see [Table 1085](#).

Table 1085. Request Message Description: ServiceReqInit_Input

Node	Description
Service Request	Passes the service request attributes.

Response Message Description: ServiceReqInit_Input

For a description of this response message, see [Table 1086](#).

Table 1086. Response Message Description: ServiceReqInit_Input

Node	Description
Service Request	Returns default information of the service request.

Request Message Description: ServiceReqDelete_Input

For a description of this request message, see [Table 1087](#).

Table 1087.Request Message Description: ServiceReqDelete_Input

Node	Description
Id	Row ID of the service request.
Id	Row ID of the activity.
Id	Row ID of the attachment.
Id	Row ID of the solution.
Id	Row ID of the service request agreement.

Response Message Description: ServiceReqDelete_Input

For a description of this response message, see [Table 1088](#).

Table 1088.Response Message Description: ServiceReqDelete_Input

Node	Description
Id	Returns the Ro_ Id of the service request. Also returns the Row ID of the child object.
Mod_Id	Returns the Mod_Id of the service request. Also returns the Mod ID.

ServiceRequest Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1089](#).

Table 1089.ServiceRequest Service Object

Name	Boundary Object Type	Class
ServiceReq	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1090](#).

Table 1090.ServiceRequest Data Object

Siebel Repository Name	External Name
ServiceReqIO	Service Request (SelfService)

Example Package for ServiceRequest

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \ServiceRequest\ServiceRequest_request.xml
```

Response

See the following file to view the sample code:

```
... \ServiceReqWS\ServiceRequest_response.xml
```

Interface Description (WSDL) for ServiceRequest

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \ServiceRequest\ServiceRequest.wsdl
```

SessionAccessWS

This Web service call is used to terminate the Siebel CRM session. This Web service makes available the business service SessionAccessService which provides the business service method Ping which is used to set a message to terminate the Siebel CRM session.

SessionAccessWS Operations

For a list of operations associated with this Web service, see [Table 1091](#).

Table 1091. SessionAccessWS Operations

Name	Description
sessionAccessPing	This is used for setting a message as an input.

Request Message Description:sessionAccessPing

For a description of this request message, see [Table 1092](#).

Table 1092.Request Message Description:sessionAccessPing

Node	Description	Type
SessionAccessPing_Input	Container element.	Not applicable
SessionAccessPing_Input/msgIn	Set as Self-Service Logout Request.	String

Response Message Description: sessionAccessPing

For a description of this response message, see [Table 1093](#).

Table 1093.Response Message Description: sessionAccessPing

Node	Description	Type
SessionAccessPing_Output	Container element.	Not applicable
SessionAccessPing_Input/msgOut	Sent as the number 1 which indicates successful termination of the session.	String

SessionAccessWS Application Interface

This topic describes the application objects called by the SessionAccessWS. This Web service makes available the business service SessionAccessService which provides the method Ping which is used to set a message to terminate the Siebel CRM session. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1094](#).

Table 1094.SessionAccessWS Service Object

Name	Boundary Object Type	Class
SessionAccessService	Business Service	CSSUIFSessionAccessService

Example Package for SessionAccessWS

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \SessionAccessWS\sessionAccess_request.xml
```

Response

See the following file to view the sample code:

```
... \SessionAccessWS\SessionAccess_response.xml
```

Interface Description (WSDL) for SessionAccessWS

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \SessionAccessWS\SessionAccessWS.wsdl
```

SFA_Activity_BS

Use this Web service to insert an activity which is associated to a selected list of contacts into the Siebel database.

SFA_Activity_BS Operations

These operations are presented as a WSDL to the clients accessing it. For a list of operations associated with this Web service, see [Table 1095](#).

Table 1095.SFA_Activity_BS operations

Name	Description
SFAInsertActivity	Creates an activity record in the database and associates a contact record to it.

Response Message Description: SFAInsertActivity

For a description of this request message, see [Table 1096](#).

Table 1096.Response Message Description: SFAInsertActivity

Node	Description
SFA_Activity_IO	Required. An instance of the integration object SFA_Activity.

Response Message Description: SFAInsertActivity

For a description of this response message, see [Table 1097](#).

Table 1097.Response Message Description: SFAInsertActivity

Node	Description
SFA_Activity_IO	Required. An instance of the integration object SFA_Activity.

SFA_Activity_BS Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1098](#).

Table 1098.SFA_Activity_BS Service Object

Name	Boundary Object Type	Class (if BusService)
SFAActivity_BS	Business Service	CSSEAIUIDataService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1099](#).

Table 1099.SFA_Activity_BS Data Object

Siebel Repository Name	Boundary Object Type	External Name
SFA_Activity_IO	Siebel Business Object	Action

Methods

For a description of methods for Web service, see [Table 1100](#).

Table 1100.SFA_Activity_BS Method

Operation	Method
Insert	Insert

Example Package for SFA_Activity_BS

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \SFA_Activity_BS \SFA_Activity_BS_request.xml
```

Response

See the following file to view the sample code:

```
... \SFA_Activity_BS \SFA_Activity_BS_response.xml
```

Interface Description (WSDL) for SFA_Activity_BS

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

...\SFA_Activity_BS\SFA_Activity_BS.wsdl

SWIAdjustmentStatusUpdate

Use this Web service to update the Status, Sub Status, and Status Description fields of an adjustment record.

SWIAdjustmentStatusUpdate Operations

For a list of operations associated with this Web service, see [Table 1101](#).

Table 1101.SWIAdjustmentStatusUpdate Operations

Name	Description
SWIAdjustmentStatusUpdate	Updates the Status, Sub Status, and Status Description fields of the adjustment record.

Calls Workflow SWIAdjustmentStatusUpdate

This Web service can be used either to call a business service or to call a workflow. This Web service calls the SWIAdjustmentStatusUpdate workflow, which extracts information about the Status, Sub Status, and Status Description fields and updates the Siebel database accordingly for that adjustment record.

SWIAdjustmentStatusUpdate Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1102](#).

Table 1102.SWIAdjustmentStatusUpdate Service Object

Name	Boundary Object Type	Class
SWIAdjustmentStatusUpdate	Workflow	Not Applicable

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1103](#).

Table 1103.SWIAdjustmentStatusUpdate Data Object

Siebel Repository Name	External Name
SWISIAAdjustmentIO	SIA Adjustment

Methods

For a description of the methods for this Web service, see [Table 1104](#).

Table 1104.SWIAdjustmentStatusUpdate Method

Operation	Method
SWIAdjustmentStatusUpdate	SWIAdjustmentStatusUpdate

Example Package for SWIAdjustmentStatusUpdate

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request from Oracle Application Integration Architecture

See the following file to view the sample code:

```
... \SWIAdjustmentStatusUpdate\SWIAdjustmentStatusUpdate_request.xml
```

Interface Description (WSDL) for SWIAdjustmentStatusUpdate

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \SWIAdjustmentStatusUpdate\SWIAdjustmentStatusUpdate.wsdl
```

SWIAdminISSAttributeDefnIO

Use this Web service to perform query operations on product attribute definitions.

SWIAdminISSAttributeDefnIO Operations

For a list of operations associated with this Web service, see [Table 1105](#).

Table 1105.SWIAdminISSAttributeDefnIO Operations

Name	Description
AttributeDefinitionQueryById	Queries by using the attribute ID
AttributeDefinitionQueryByExample	Queries by name, ID, or any valid input

Request Message Description: AttributeDefinitionQueryById

For a description of this request message, see [Table 1106](#).

Table 1106.Request Message Description: AttributeDefinitionQueryById

Node	Description	Type
PrimaryRowId	Required	String

Response Message Description: AttributeDefinitionQueryById

For a description of this response message, see [Table 1107](#).

Table 1107.Response Message Description: AttributeDefinitionQueryById

Node	Description	Type
SiebelMessage	Required	Integration Object

Request Message Description: AttributeDefinitionQueryByExample

For a description of this request message, see [Table 1108](#).

Table 1108.Request Message Description: AttributeDefinitionQueryByExample

Node	Description	Type
SiebelMessage	Required	Integration Object

Response Message Description: AttributeDefinitionQueryByExample

For a description of this response message, see [Table 1109](#).

Table 1109.Response Message Description: AttributeDefinitionQueryByExample

Node	Description	Type
SiebelMessage	Required	Integration Object

SWIAdminISSAttributeDefnIO Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1110](#).

Table 1110.SWIAdminISSAttributeDefnIO Service Object

Name	Boundary Object Type	Class
SWI Product Attributes	Business Service	CSSEAIDataSyncService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1111](#).

Table 1111.SWIAdminISSAttributeDefnIO Data Object

Siebel Repository Name	External Name
SWIAdminISSAttributeDefnIO	SWI Admin Attribute VOD Definition

Methods

For a description of the methods for this Web service, see [Table 1112](#).

Table 1112.SWIAdminISSAttributeDefnIO Methods

Operation	Method
AttributeDefinitionQueryById	QueryById
AttributeDefinitionQueryByExample	QueryByExample

SWIAdminISSClassDefinitionIO

Use this Web service to perform query operations on product class definitions.

SWIAdminISSClassDefinitionIO Operations

For a list of operations associated with this Web service, see [Table 1113](#).

Table 1113.SWIAdminISSClassDefinitionIO Operations

Name	Description
ProductClassQueryById	Queries by using the class ID
ProductClassQueryByExample	Queries by name, ID, or any valid input

Request Message Description: ProductClassQueryById

For a description of this request message, see [Table 1114](#).

Table 1114.Request Message Description: ProductClassQueryById

Node	Description	Type
PrimaryRowId	Required	String

Response Message Description: ProductClassQueryById

For a description of this response message, see [Table 1115](#).

Table 1115.Response Message Description: ProductClassQueryById

Node	Description	Type
SiebelMessage	Required	Integration Object

Request Message Description: ProductClassQueryByExample

For a description of this request message, see [Table 1116](#).

Table 1116.Request Message Description: ProductClassQueryByExample

Node	Description	Type
SiebelMessage	Required	Integration Object

Response Message Description: ProductClassQueryByExample

For a description of this response message, see [Table 1117](#).

Table 1117.Response Message Description: ProductClassQueryByExample

Node	Description	Type
SiebelMessage	Required	Integration Object

SWIAdminISSClassDefinitionIO Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1118](#).

Table 1118.SWIAdminISSClassDefinitionIO Service Object

Name	Boundary Object Type	Class
SWI Product Class Hierarchy	Business Service	CSSCMUProdClassWebSvc

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1119](#).

Table 1119.SWIAdminISSClassDefinitionIO Data Object

Siebel Repository Name	External Name
SWIAdminISSClassDefinitionIO	SWI Admin ISS Class Definition

Methods

For a description of the methods for this Web service, see [Table 1120](#).

Table 1120.SWIAdminISSClassDefinitionIO Methods

Operation	Method
ProductClassQueryById	QueryById
ProductClassQueryByExample	QueryByExample

SWIAssetManagement

Use this inbound Web service to start Siebel Configurator.

SWIAssetManagement Operations

For a list of operations associated with this Web service, see [Table 1121](#).

Table 1121.SWIAssetManagement Operations

Operation	Description
SWIAssetManagementInsert	Inserts
SWIAssetManagementUpdate	Updates
SWIAssetManagementSynchronize	Synchronizes

Request Message Description: SWIAssetManagementInsert

For a description of this request message, see [Table 1122](#).

Table 1122.Request Message Description: SWIAssetManagementInsert

Node	Description	Type
SiebelMessage	Required.	Integration Object
UTCCanonical	A value of Y means that all date-type fields in the payload are in UTC standard format.	String

Response Message Description: SWIAssetManagementInsert

For a description of this response message, see [Table 1123](#).

Table 1123. Response Message Description: SWIAssetManagementInsert

Node	Description	Type
SiebelMessage	Required	Integration Object

Request Message Description: SWIAssetManagementUpdate

For a description of this request message, see [Table 1124](#).

Table 1124. Request Message Description: SWIAssetManagementUpdate

Node	Description	Type
SiebelMessage	Required	Integration Object
UTCCanonical	A value of Y means that all date-type fields in the payload are in UTC standard format.	String

Response Message Description: SWIAssetManagementUpdate

For a description of this response message, see [Table 1125](#).

Table 1125. Response Message Description: SWIAssetManagementUpdate

Node	Description	Type
SiebelMessage	Required	Integration Object

Request Message Description: SWIAssetManagementSynchronize

For a description of this request message, see [Table 1126](#).

Table 1126. Request Message Description: SWIAssetManagementSynchronize

Node	Description	Type
SiebelMessage	Required	Integration Object
UTCCanonical	A value of Y means that all date-type fields in the payload are in UTC standard format.	String

Response Message Description: SWIAssetManagementSynchronize

For a description of this response message, see [Table 1127](#).

Table 1127. Response Message Description: SWIAssetManagementSynchronize

Node	Description	Type
SiebelMessage	Required	Integration Object

SWIAssetManagement Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1128](#).

Table 1128.SWIAssetManagement Service Object

Siebel Repository Name	Boundary Object Type	Class
SWI Asset Management Service	Business Service	CSSEAIDataSyncService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1129](#).

Table 1129.SWIAssetManagement Data Object

Siebel Repository Name	External Name
SWIAssetManagementIO	SWI Asset Management

Methods

For a description of the methods for this Web service, see [Table 1130](#).

Table 1130.SWIAssetManagement Methods

Operation	Method
SWIAssetManagementInsert	Inserts
SWIAssetManagementUpdate	Updates
SWIAssetManagementSynchronize	Synchronizes

Interface Description (WSDL) for SWISWIAssetManagment

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

WSDL

...WSDL\SWIAssetManagment.wsdl

SWIContactServices

Use this inbound Web service to support Query, Upsert and Synchronize operations for Contact records and contact child details.

SWIContactServices Operations

For a list of operations associated with this Web service, see [Table 1131](#).

Table 1131. SWIContactServices Operations

Name	Description
SWIContactServicesInsertOrUpdate	Calls <i>Insert or Update</i> method used for inserting a new contact along with the child details into the Siebel database. If the contact is already present in the Siebel database, then the contact will be updated with the details from the request message.
SWIContactServicesQueryByExample	Calls the <i>Query by Example</i> method to Query Contact details along with the child details from the Siebel database.
SWIContactServicesSynchronize	Calls the <i>Synchronize</i> method to synchronize the contact in the request message with the contact details in the Siebel database. If the child details that are part of the request message are not present in the Siebel database, then they are inserted. If any additional child is present in the database and not part of request message, then it is deleted from the database.

Request Message Description: SWIContactServicesInsertOrUpdate

Inserts a new contact along with the child details in to the Siebel database. If the contact is already present in the Siebel database then the contact record is updated with any new details contained in the request message.

For a description of this request message, see [Table 1132](#).

Table 1132. Request Message Description: SWIContactServicesInsertOrUpdate

Node	Description	Type
Alias	Alias of the contact record.	String
CellularPhone	Mobile phone number of the contact.	String
ContactPersonTitle	Contact's title.	String
CurrencyCode	Contact's account currency code.	String
DateofBirth	Contact's birth date.	String

Table 1132.Request Message Description: SWIContactServicesInsertOrUpdate

Node	Description	Type
EmailAddress	Contact's email address.	String
FaxPhone	Contact's fax number.	String
FirstName	Contact's first name.	String
Gender	Contact's gender.	String
HomePhone	Contact's home phone number.	String
JobTitle	Contact's job title.	String
LastName	Contact's last name.	String
MM	Mr. or Mrs.	String
MaritalStatus	Contact's marital status.	String
MiddleName	Contact's middle name.	String
RowId	Row ID of Siebel Contact record	String
SocialSecurityNumber	Contact's social security number.	String
Status	Contact record's status.	String
WorkPhone	Contact's work phone number.	String
AIAIntegrationId	ID value used for mapping the request message and response message contact details.	String
ListofOrganization	Container for Organization	String
PersonalAddress	Contact's home address.	String
Id	Siebel row ID of the Contact record.	String
AddressName	Contact's address name.	String
City	Contact's city of residence.	String
Country	Contact's country of residence.	String
PostalCode	Contact's postal code.	String
Province	Contact's province, if applicable.	String
State	Contact's state of residence.	String
StreetAddress1	Line 1 details for the contact.	String
StreetAddress2	Line 2 details for the contact.	String
AIAIntegrationId	ID value used for mapping the request and response message.	String

Response Message Description: SWIContactServicesInsertOrUpdate

For a description of this response message, see [Table 1133](#).

Table 1133. Response Message Description: SWIContactServicesInsertOrUpdate

Node	Description	Type
Alias	Alias of contact record.	String
CellularPhone	Contact's mobile phone number.	String
ContactPersonTitle	Contact's title.	String
CurrencyCode	Contact account currency code.	String
DateofBirth	Contact's birth date.	String
EmailAddress	Contact's email address.	String
FaxPhone	Contact's fax number.	String
FirstName	Contact's first name.	String
Gender	Contact's gender.	String
HomePhone	Contact's home phone number.	String
JobTitle	Contact's job title.	String
LastName	Contact's last name.	String
MM	Mr. or Mrs.	String
MaritalStatus	Contact's marital status.	String
MiddleName	Contact's middle name.	String
RowId	Row ID of Siebel Contact record	String
SocialSecurityNumber	Contact's social security number.	String
Status	Contact status.	String
WorkPhone	Contact's work phone number.	String
AIAIntegrationId	ID value used for mapping the request message and response message contact details.	String
ListofOrganization	Container for organization record.	String
PersonalAddress	Contact's home address.	String
Id	Row ID of the Contact record In the Siebel database	String
AddressName	Address name	String
City	Contact's city.	String
Country	Contact's country.	String
PostalCode	Contact's postal code.	String
Province	Contact's province (if applicable).	String

Table 1133. Response Message Description: SWContactServicesInsertOrUpdate

Node	Description	Type
State	Contact's state.	String
StreetAddress1	Line 1 details for the contact.	String
StreetAddress2	Line 2 details for the contact.	String
AIAIntegrationId	ID value used for mapping the request and response message.	String

Request Message Description: SWContactServicesQueryByExample

For a description of this request message, see [Table 1134](#).

Table 1134. Request Message Description: SWContactServicesQueryByExample

Node	Description	Type
RowId	Row ID of Siebel Contact record	String
ListOfAccount	List of Account records.	String
ListofPersonalAddress	List of personal address records of contact.	String
PersonalAddress	Contact's personal address.	String

Response Message Description: SWContactServicesQueryByExample

For a description of this response message, see [Table 1135](#).

Table 1135. Response Message Description: SWContactServicesQueryByExample

Node	Description	Type
Id	Row ID.	String
Alias	Alias of contact record.	String
CellularPhone	Contact's mobile phone number.	String
ContactPersonTitle	Contact's title.	String
CurrencyCode	Contact account currency code.	String
DateofBirth	Contact's birth date.	String
EmailAddress	Contact's email address.	String
FaxPhone	Contact's fax number.	String
FirstName	Contact's first name.	String
Gender	Contact's gender.	String
HomePhone	Contact's home phone number.	String
JobTitle	Contact's job title.	String

Table 1135. Response Message Description: SWIContactServicesQueryByExample

Node	Description	Type
LastName	Contact's last name.	String
MM	Mr. or Mrs.	String
MaritalStatus	Contact's marital status.	String
MiddleName	Contact's middle name.	String
MotherMaidenName	Contact's mother's maiden name.	String
PrimaryOrganizationId	Primary organization for contact.	String
RowId	Row ID in Siebel data table.	String
SocialSecurityNumber	Contact's social security number.	String
Status	Status of contact record.	String
WorkPhone	Contact's work telephone number.	String
ListofAccount	Container for Account.	Integration Component
ListofComInvoiceProfile	Container for invoice profile.	Integration Component
ListofOrganization	Container for Organization.	Integration Component
ListofPersonalAddress	Container for personal address records.	Integration Component
PersonalAddress	Contact's personal address.	String
ListofUCMContactPrivacy	Privacy details for Contact record.	Integration Component

Request Message Description: SWIContactServicesSynchronize

For a description of this request message, see [Table 1136](#).

Table 1136. Request Message Description: SWIContactServicesSynchronize

Node	Description	Type
Id	Row ID.	String
Alias	Alias of contact record.	String
CellularPhone	Contact's mobile phone number.	String
ContactPersonTitle	Contact's title.	String
CurrencyCode	Contact's account currency code.	String
DateofBirth	Contact's birth date.	String
EmailAddress	Contact's email address.	String

Table 1136. Request Message Description: SWIContactServicesSynchronize

Node	Description	Type
FaxPhone	Contact's fax number.	String
FirstName	Contact's first name.	String
Gender	Contact's gender.	String
HomePhone	Contact's home phone number.	String
JobTitle	Contact's job title.	String
LastName	Contact's last name.	String
MM	Mr. or Mrs.	String
MaritalStatus	Contact's marital status.	String
MiddleName	Contact's middle name.	String
MotherMaidenName	Contact's mother's maiden name.	String
PrimaryOrganizationId	Primary organization for contact.	String
RowId	Row ID in Siebel data table.	String
SocialSecurityNumber	Contact's social security number.	String
Status	Status of contact record.	String
WorkPhone	Contact's work telephone number.	String
AIAIntegrationId	ID value used for mapping the request message and response message contact details.	String
ListofOrganization	Container for Organization.	Integration Component
ListofPersonalAddress	Container for personal address records.	Integration Component

Response Message Description: SWIContactServicesSynchronize

For a description of this response message, see [Table 1137](#).

Table 1137. Response Message Description: SWIContactServicesSynchronize

Node	Description	Type
Id	Row ID.	String
Alias	Alias of contact record.	String
CellularPhone	Contact's mobile phone number.	String
ContactPersonTitle	Contact's title.	String
CurrencyCode	Contact's account currency code.	String

Table 1137. Response Message Description: SWIContactServicesSynchronize

Node	Description	Type
DateofBirth	Contact's birth date.	String
EmailAddress	Contact's email address.	String
FaxPhone	Contact's fax number.	String
FirstName	Contact's first name.	String
Gender	Contact's gender.	String
HomePhone	Contact's home phone number.	String
JobTitle	Contact's job title.	String
LastName	Contact's last name.	String
MM	Mr. or Mrs.	String
MaritalStatus	Contact's marital status.	String
MiddleName	Contact's middle name.	String
MotherMaidenName	Contact's mother's maiden name.	String
PrimaryOrganizationId	Primary organization for contact.	String
RowId	Row ID in Siebel data table.	String
SocialSecurityNumber	Contact's social security number.	String
Status	Status of contact record.	String
WorkPhone	Contact's work telephone number.	String
AIAIntegrationId	ID value used for mapping the request message and response message contact details.	String
ListofOrganization	Container for Organization.	Integration Component
ListofPersonalAddress	Container for personal address records.	Integration Component

SWIContactServices Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1138](#).

Table 1138.SWIContactServices Service Object

Siebel Repository Name	Boundary Object Type	Class
SWI Contact Service	Business Service	CSSEAIDataSyncService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1139](#).

Table 1139.SWIContactServices Data Object

Siebel Repository Name	External Name
SWIContactIO	SWI Contact

Methods

For a description of the methods for this Web service, see [Table 1140](#).

Table 1140.SWIContactServices Methods

Operation	Method
SWIContactServicesInsertOrUpdate	InsertOrUpdate
SWIContactServicesQueryByExample	QueryByExample
SWIContactServicesSynchronize	Synchronize

SWICreateAdjustment

Use this Web service to create adjustments in the external Oracle Communications Billing and Revenue Management application by submitting a request to the Oracle Communications Billing and Revenue Management Advanced Queue (AQ) facility.

SWICreateAdjustment Operations

For a list of operations associated with this Web service, see [Table 1141](#).

Table 1141.SWICreateAdjustment Operations

Name	Description
CreateAdjustment	Creates adjustments in the external Oracle Communications Billing and Revenue Management application.

Request Message Description: CreateAdjustment

For a description of this request message, see [Table 1142](#).

Table 1142.Request Message Description: CreateAdjustment

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
SWICreateAdjustmentReqMsg:ListOfCmuRequestAdjustmentIo	Optional	Integration Object

Response Message Description

There is no response message. The request is being posted to the Oracle Communications Billing and Revenue Management facility.

SWICreateAdjustment Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1143](#).

Table 1143.SWICreateAdjustment Service Object

Name	Boundary Object Type	Class
SWICreateAdjustment	Business Service	CSSWSOutboundDispatcher

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1144](#).

Table 1144.SWICreateAdjustment Data Object

Siebel Repository Name	External Name
CMU Request Adjustment IO	Account

Methods

For a description of the methods for this Web service, see [Table 1145](#).

Table 1145.SWICreateAdjustment Method

Operation	Method
CreateAdjustment	CreateAdjustment

SWICustomerParty

Use this inbound Web service to support Query, Upsert and Synchronize operations for contact records and contact child details.

SWICustomerParty Operations

For a list of operations associated with this Web service, see [Table 1146](#).

Table 1146.SWICustomerParty Operations

Name	Description
SWICustomerPartyInsertOrUpdate	Calls the Insert or Update method used for inserting a new account along with the child details into the Siebel database. If the account is already present in the Siebel database, then the account will be updated with any new details contained in the request message.
SWICustomerPartyQueryByExample	Calls the Query by Example method to query the Siebel database for account details along with any child details.
SWICustomerPartySynchronize	<p>Calls Synchronize method to synchronize the account record contained in the request message with the account details in Siebel database.</p> <p>If the child details that are part of request message are not present in the Siebel database, then the details are inserted. If any additional child are present in the Siebel database and are not part of request message, then those details are deleted from the database.</p>

Request Message Description: SWICustomerPartyInsertOrUpdate

Inserts a new account along with the child details into the Siebel database. If the account is already present in the Siebel database, then the Account record is updated with the details contained in the request message.

For a description of this request message, see [Table 1147](#).

Table 1147.Request Message Description: SWICustomerPartyInsertOrUpdate

Node	Description	Type
ListofSWIcustomerpartyIO	An instance of the integration object ListofSWIcustomerpartyIO.	Integration Object
The following nodes apply to SWIcustomerpartyIO		
Account	Account name.	String
AccountStatus	Status of account record.	String

Table 1147.Request Message Description: SWICustomerPartyInsertOrUpdate

Node	Description	Type
DUNSNumber	Dun and Bradstreet data universal numbering system number.	String
MainFaxNumber	Main fax number of account.	String
MainPhoneNumber	Main phone number of account.	String
Name	Account name.	String
HomePage	Account's home page address.	String
AIAIntegrationId	ID value used for mapping the request message and response message account details.	String
Location	Account's location.	String
RowId	Row ID of Siebel Account record.	String
ListofCutAddress	Optional. Business address.	Integration Component
ListofContact	Contact details	Integration Component
ListofInternalDivision	Internal division details.	Integration Component
City	City where account is located.	String
Country	Country where account is located.	String
County	County where account is located.	String
PostalCode	Postal code of account.	String
Province	Province (if applicable) where account is located.	String
AIAIntegrationId	Contact's social security number.	String
Status	Contact status.	String
WorkPhone	Contact's work phone number.	String
AIAIntegrationId	ID value used for mapping the request message and response message contact details.	String
ListofOrganization	Container for organization record.	String
PersonalAddress	Contact's home address.	String
Id	Row ID of the Contact record in Siebel data table.	String
AddressName	Address name	String

Table 1147. Request Message Description: SWICustomerPartyInsertOrUpdate

Node	Description	Type
City	Contact's city.	String
Country	Contact's country.	String
PostalCode	Contact's postal code.	String
Province	Contact's province (if applicable).	String
State	Contact's state.	String
StreetAddress1	Line 1 details for the contact.	String
StreetAddress2	Line 2 details for the contact.	String
AIAIntegrationId	ID value used for mapping the request and response message.	String

Response Message Description: SWICustomerPartyInsertOrUpdate

For a description of this response message, see [Table 1148](#).

Table 1148. Response Message Description: SWICustomerPartyInsertOrUpdate

Node	Description	Type
ListofSWIcustomerpartyIO	An instance of the integration object ListofSWIcustomerpartyIO.	Integration Object
The following nodes apply to SWIcustomerpartyIO		
Account	Account name.	String
AccountStatus	Status of account record.	String
DUNSNumber	Dun and Bradstreet data universal numbering system number.	String
HomePage	Account's home page address.	String
Location	Account's location.	String
MainFaxNumber	Account's main fax number.	String
MainPhoneNumber	Account's main phone number.	String
Name	Account name.	String
AIAIntegrationId	ID value used for mapping the request message and response message account details.	String
ListofCutAddress	Optional. Business address.	Integration Component

Table 1148. Response Message Description: SWICustomerPartyInsertOrUpdate

Node	Description	Type
ListofContact	Contact details.	Integration Component
ListOfInternalDivision	Internal division details.	Integration Component

Request Message Description: SWICustomerPartyQueryByExample

For a description of this request message, see [Table 1149](#).

Table 1149. Request Message Description: SWICustomerPartyQueryByExample

Node	Description	Type
ListofSWIcustomerpartyIO	An instance of the integration object ListofSWIcustomerpartyIO.	Integration Object
The following nodes apply to SWIcustomerpartyIO		
RowId	Row ID of account in Siebel data table.	String
ListofCutAddress	Optional. Business address.	Integration Component

Response Message Description: SWICustomerPartyQueryByExample

For a description of this response message, see [Table 1150](#).

Table 1150. Response Message Description: SWIContactServicesQueryByExample

Node	Description	Type
ListofSWIcustomerpartyIO	An instance of the integration object ListofSWIcustomerpartyIO.	Integration Object
The following nodes apply to SWIcustomerpartyIO		
Account	Account name.	String
AccountStatus	Status of account record.	String
AccountTypeCode	Dun and Bradstreet data universal numbering system number.	String
CurrencyCode	Account's currency code.	String
DUNSNumber	Dun and Bradstreet data universal numbering system number.	String
HomePage	Homepage of account	String
IntegrationId	Integration ID.	String
Location	Account location.	String

Table 1150. Response Message Description: SWIContactServicesQueryByExample

Node	Description	Type
MainFaxNumber	Main fax number of account.	String
MainPhoneNumber	Main phone number of account.	String
Name	Account name.	String
ParentAccountId	Account ID of parent account.	String
PrimaryAddressId	Primary address of account.	String
PrimaryBillToAddressId	Primary billing address of account.	String
PrimaryContactId	Primary Contact ID for the account.	String
PrimaryOrganizationId	Primary Organization ID for the account.	String
PrimaryShipToAddress	Primary shipping address for the account.	String
RowId	Row ID in Siebel data table.	String
Type	Account type.	String
ListofCutAddress	Optional. Business address.	Integration Component
ListofContact	Contact details.	Integration Component
ListofInternalDivision	Internal division details.	Integration Component

Request Message Description: SWICustomerPartySynchronize

For a description of this request message, see [Table 1151](#).

Table 1151. Request Message Description: SWICustomerPartySynchronize

Node	Description	Type
ListofSWIcustomerpartyIO	An instance of the integration object ListofSWIcustomerpartyIO.	Integration Object
The following nodes apply to SWIcustomerpartyIO		
Account	Account name.	String
AccountStatus	Status of account record.	String
DUNSNumber	Dun and Bradstreet data universal numbering system number.	String
MainFaxNumber	Main fax number of account.	String
MainPhoneNumber	Main phone number of account.	String
Name	Account name.	String
HomePage	Account's home page address.	String

Table 1151. Request Message Description: SWICustomerPartySynchronize

Node	Description	Type
AIAIntegrationId	ID value used for mapping the request message and response message account details.	String
Location	Account's location.	String
RowId	Row ID of Siebel Account record.	String
ListofCutAddress	Optional. Business address.	Integration Component
ListofContact	Contact details.	Integration Component
ListofInternalDivision	Internal division details.	Integration Component
City	City where account is located.	String
Country	Country where account is located.	String
County	County where account is located.	String
PostalCode	Postal code of account.	String
Province	Province (if applicable) where account is located.	String
AIAIntegrationId	Contact's social security number.	String
Status	Contact status.	String
WorkPhone	Contact's work phone number.	String
AIAIntegrationId	ID value used for mapping the request message and response message contact details.	String
ListofOrganization	Container for organization record.	String
PersonalAddress	Contact's home address.	String
Id	Row ID of the Contact record in Siebel data table.	String
AddressName	Address name	String
City	Contact's city.	String
Country	Contact's country.	String
PostalCode	Contact's postal code.	String
Province	Contact's province (if applicable).	String
State	Contact's state.	String
StreetAddress1	Line 1 details for the contact.	String

Table 1151. Request Message Description: SWICustomerPartySynchronize

Node	Description	Type
StreetAddress2	Line 2 details for the contact.	String
AIAIntegrationId	ID value used for mapping the request and response message.	String

Response Message Description: SWICustomerPartySynchronize

For a description of this response message, see [Table 1152](#).

Table 1152. Response Message Description: SWICustomerPartySynchronize

Node	Description	Type
ListofSWIcustomerpartyIO	An instance of the integration object ListofSWIcustomerpartyIO.	Integration Object
The following nodes apply to SWIcustomerpartyIO		
Account	Account name.	String
AccountStatus	Status of account record.	String
DUNSNumber	Dun and Bradstreet data universal numbering system number.	String
HomePage	Account's home page address.	String
Location	Account's location.	String
MainFaxNumber	Account's main fax number.	String
MainPhoneNumber	Account's main phone number.	String
Name	Account name.	String
AIAIntegrationId	ID value used for mapping the request message and response message account details.	String
ListofCutAddress	Optional. Business address.	Integration Component
ListofContact	Contact details.	Integration Component
ListOfInternalDivision	Internal division details.	Integration Component

SWICustomerParty Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1153](#).

Table 1153. Service Object

Siebel Repository Name	Boundary Object Type	Class
SWI Customer Party Service	Business Service	CSSEAIDataSyncService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1154](#).

Table 1154. Data Object

Siebel Repository Name	External Name
SWICustomerPartyIO	Account

SWILocationServices

Use this Web service to perform the following basic operations on locations:

- Back up location
- Query location

SWILocationServices Operations

For a list of operations associated with this Web service, see [Table 1155](#).

Table 1155.SWILocationServices Operations

Name	Description
SWILocationQuery	Queries the location information in the Siebel business application as requested by the third-party application
SWILocationSynchronize	Synchronizes the location information in the Siebel business application with the location information in the third-party application

Request Message Description: SWILocationQuery

For a description of this request message, see [Table 1156](#).

Table 1156.Request Message Description: SWILocationQuery

Node	Description	Type
PrimaryRowId	Required	String

Response Message Description: SWILocationQuery

For a description of this response message, see [Table 1157](#).

Table 1157. Response Message Description: SWILocationQuery

Node	Description	Type
SiebelMessage	Required	Integration Object

Request Message Description: SWILocationSynchronize

For a description of this request message, see [Table 1158](#).

Table 1158. Request Message Description: SWILocationSynchronize

Node	Description	Type
SiebelMessage	Required	Integration Object
StatusObject	Optional	String

Response Message Description: SWILocationSynchronize

For a description of this response message, see [Table 1159](#).

Table 1159. Response Message Description: SWILocationSynchronize

Node	Description	Type
SiebelMessage	Required	Integration Object

SWILocationServices Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1160](#).

Table 1160. SWILocationServices Service Object

Siebel Repository Name	Boundary Object Type	Class
SWI Location Adapter	Business Service	CSSEAIDataSyncService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1161](#).

Table 1161.SWILocationServices Data Object

Siebel Repository Name	External Name
SWIFMLocationIOFM	Location

Methods

For a description of the methods for this Web service, see [Table 1162](#).

Table 1162.SWILocationServices Methods

Operation	Method
SWILocationQuery	QueryById
SWILocationSynchronize	Synchronize

SWILocationSync

Use this outbound Web service to submit an order into the order queue.

SWILocationSync Operations

For a list of operations associated with this Web service, see [Table 1163](#).

Table 1163.SWILocationSync Operations

Name	Description
SyncTransportationStopList	Submits the location request in the Siebel business application into the asynchronous queue of the third-party application

Request Message Description: SyncTransportationStopList

For a description of this request message, see [Table 1164](#).

Table 1164.Request Message Description: SyncTransportationStopList

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
SWILocationSyncReqMsg:SyncTransportationStopList	Optional	Integration Object

Response Message Description: SyncTransportationStopList

Not applicable.

SWILocationSync Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1165](#).

Table 1165.SWILocationSync Service Object

Siebel Repository Name	Boundary Object Type	Class
SWILocationSync	Business Service	CSSWSOutboundDispatcher
SWISendLocation	Workflow	Not applicable

Data Object (Integration Object)

For a description of the data object for this Web service, see [Table 1166](#).

Table 1166.SWILocationSync Data Object

Siebel Repository Name	External Name
SWIFMLocationIOFM	Location

Method

For a description of the method for this Web service, see [Table 1167](#).

Table 1167.SWILocationSync Method

Operation	Method
SyncTransportationStopList	SyncTransportationStopList

SWILSClinicalActivityTemplate

Use this Web service to send activity template values for a given template type from the Siebel CRM application. An external application can invoke this Web service using valid Siebel application user credentials for authentication.

SWILSClinicalActivityTemplate Operations

For a list of operations associated with this Web service, see [Table 1168](#).

Table 1168.SWILSClinicalActivityTemplate Operations

Operation Name	Description
TemplateQueryByExample	Used to send Activity template values for a given template type.

Request Message Description: TemplateQueryByExample

This Web service can be invoked with the Type value so that only related activity templates are returned. If you do not provide input, then all activity templates are returned. For a description of this request message, see [Table 1169](#).

Table 1169.Request Message Description: TemplateQueryByExample

Node	Description	Type
Id	Optional. Row Id.	Character data
Searchspec	Optional. Search specification.	Character data
AutoTrigger	Optional. Auto Trigger flag.	Boolean
Description	Optional. Activity template description.	Character data
Name	Optional. The name of the Activity template.	Character data
ParentTemplateId	Optional. The parent template ID.	Character data
ProtocolId	Optional. Protocol ID.	Character data
ProtocolTitle	Optional. Protocol title.	Character data
Public	Optional. Public flag.	Boolean
TemplateType	Optional. The template type.	Character data
Type	Optional. Type.	Character data

Response Message Description: TemplateQueryByExample

For a description of this request message, see [Table 1170](#).

Table 1170.Response Message Description: TemplateQueryByExample

Node	Description	Type
Id	Row ID of the Activity template record.	Character data
AutoTrigger	Auto Trigger flag. Values are Y or N.	Boolean
Description	Activity template description.	Character data
Name	Activity template name.	Character data

Table 1170. Response Message Description: TemplateQueryByExample

Node	Description	Type
ParentTemplateId	Parent template ID.	Character data
ProtocolId	Protocol ID.	Character data
ProtocolTitle	Protocol title.	Character data
Public	Public flag. Values are Y or N.	Boolean
TemplateType	Template type, such as document, activity, and so on	Character data
Type	Activity template type.	Character data

SWILSClinicalActivityTemplate Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1171](#).

Table 1171. SWILSClinicalActivityTemplate Service Object

Name	Boundary Object Type	Class
LS Clinical Activity Template Service	Business Service	CSSEAIDataSyncService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1172](#).

Table 1172. SWILSClinicalActivityTemplate Data Object

Siebel Repository Name	External Name
LS Clinical Activity Template	Activity Template

Example Package for SWILSClinicalActivityTemplate

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \SWILSClinicalActivityTemplate\SWILSClinicalActivityTemplate-QueryByExample-request.xml
```

Interface Description (WSDL) for SWILSClinicalActivityTemplate

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

...\SWILSClinicalActivityTemplate\SWILSClinicalActivityTemplate.WSDL

SWILSClinicalCreateSiteVisitGeo Location

Monitoring visits are required by Federal regulations. Siebel Clinical users, also known as monitors, are often working from the field and perform site visits based on protocol requirements and objectives. Often, monitors are required to conduct unplanned visits and will have to adjust existing plans for planned site visits. Monitors may carry mobile devices which capture a site's GPS information. A third-party application allows the user to select the Site Visit record, check in site location details, and then send them to Siebel Life Sciences.

If more than one monitor checks in location details from a third party application to Siebel Life Sciences for the same site visit, then multiple Geo Location Records are created in Siebel Life Sciences. Similarly if the same user checks in at a different time, multiple Geo Location Records are created.

SWILSClinicalCreateSiteVisitGeoLocation Operations

For a list of operations associated with this Web service, see [Table 1173](#).

Table 1173.SWILSClinicalCreateSiteVisitGeoLocation Operations

Name	Description
insert	Reads the input parameters for the site visit and saves the information in Siebel Life Sciences.

Request Message Description: insert

For a description of this request message, see [Table 1174](#).

Table 1174.Request Message Description: insert

Node	Description	Type
SiteVisitId	Required. Site visit ID (Siebel database row ID).	Character data
UserId	Required. Siebel database row ID for the Siebel Clinical visit team member.	Character data
VisitDate	Required. Site visit date time for CRA.	Date and time

Table 1174. Request Message Description: insert

Node	Description	Type
Latitude	Optional. Site location latitude.	Number
Longitude	Optional. Site location longitude.	Number
Comments	Optional. Any comments provided by the monitor.	Character data

Response Message Description: insert

There is no response message for the insert operation. In the event of an error, an error message will be delivered.

SWILSClinicalCreateSiteVisitGeoLocation Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Workflow)

For a description of the service objects for this Web service, see [Table 1175](#).

Table 1175. SWILSClinicalCreateSiteVisitGeoLocation Service Object

Name	Boundary Object Type	Class
SWI LS Clinical Create Site Visit Geo Location	Workflow	Not applicable.

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1176](#).

Table 1176. SWILSClinicalCreateSiteVisitGeoLocation Data Object

Siebel Repository Name	External Name
LS Clinical Site Visits Geo Loc IO	LS Clinical Site Visits Geo Location

Example Package for SWILSClinicalCreateSiteVisitGeoLocation

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

...\SWILSClinicalCreateSiteVisitGeoLocation\SWILSClinicalCreateSiteVisitGeoLocation_request.xml

Response

See the following file to view the sample code:

...\SWILSClinicalCreateSiteVisitGeoLocation\SWILSClinicalCreateSiteVisitGeoLocation_response.xml

Interface Description (WSDL) for SWILSClinicalCreateSiteVisitGeoLocation

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

...\SWILSClinicalCreateSiteVisitGeoLocation\SWILSClinicalCreateSiteVisitGeoLocation.wsdl

SWILSClinicalGetEmployees

Use this Web service to retrieve employee information. An external application can invoke this Web service using valid Siebel application user credentials for authentication. Additionally, consider the following:

- If no input is provided for any tags in the LSclinicalGetEmployeesQueryByExample operation, then the Web service returns all employee records. If the returned number of records is more than the predefined maximum size, then the Web service returns an error message prompting the user to refine the search.
- When using the LSclinicalGetEmployeesQueryPage operation, this Web service returns an error message if the page size field is left blank.
- This Web service is used to return all employees from an organization or sub-organization to which an authenticated user is associated.

SWILSClinicalGetEmployees Operations

For a list of operations associated with this Web service, see [Table 1177](#).

Table 1177.SWILSClinicalGetEmployees Operations

Operation Name	Description
LSclinicalGetEmployeesQueryByExample	Used to return employees in a single result set.
LSclinicalGetEmployeesQueryById	Used to return employees based on given primary row ID.
LSclinicalGetEmployeesQueryPage	Used to return employees in pages.

Request Message Description: LSclinicalGetEmployeesQueryByExample

This operation can be invoked with either the employee ID or login name. This ensures that only the corresponding employee details are returned. Other fields can also be used to refine the search criteria. If no input is provided, then all the employees are returned. For a description of this request message, see [Table 1178](#).

Table 1178. Request Message Description: LSclinicalGetEmployeesQueryByExample

Node	Description	Type
Employee.Id	Optional. Row ID of employee.	Character data
Employee.EMailAddr	Optional. Email address.	Character data
Employee.FirstName	Optional. First name.	Character data
Employee.JobTitle	Optional. Job title.	Character data
Employee.LastName	Optional. Last name.	Character data
Employee.LoginName	Optional. User ID.	Character data
Employee.Phone	Optional. Phone number	Number
RelatedPosition.Division	Optional. Employee division.	Character data
RelatedResponsibility.Responsibility	Optional. Employee responsibility.	Character data

Request Message Description: LSclinicalGetEmployeesQueryPage

This operation can be invoked with either the employee ID or login name. This ensures that only employee details are returned. You can use other fields to refine the search criteria. If all employee details are required, then pass an asterisk (*) for all nodes. The result set will be in pages with page size.

For a description of this request message, see [Table 1179](#).

Table 1179. Request Message Description: LSclinicalGetEmployeesQueryPage

Node	Description	Type
Employee.Id	Required. Row ID of the employee record. Can be either an asterisk (*), or a valid Row ID.	Character data
Employee.FirstName	Required. Employee’s first name. Can be either an asterisk (*), or the employee’s first name.	Character data
Employee.LastName	Required. Employee’s last name. Can be either an asterisk (*), or the employee’s last name.	Character data
Employee.LoginName	Required. User ID. Can be either an asterisk (*), or the employee’s user ID.	Character data

Table 1179. Request Message Description: LSClinicalGetEmployeesQueryPage

Node	Description	Type
RelatedPosition. Division	Required. Employee division. Can be either an asterisk (*), or the employee division.	Character data
RelatedResponsibility. Responsibility	Required. Employee responsibility. Can be either an asterisk (*), or employee responsibility.	Character data

Request Message Description: LSClinicalGetEmployeesQueryById

This operation can be invoked with the employee row ID so that only corresponding employee details are returned. For a description of this request message, see [Table 1180](#).

Table 1180. Request Message Description: LSClinicalGetEmployeesQueryById

Node	Description	Type
PrimaryRowId	Required. The row ID of the employee.	Character data

Response Message Description: LSClinicalGetEmployeesQueryById, LSClinicalGetEmployeesQueryByExample and LSClinicalGetEmployeesQueryPage

Each of these operations uses the same response message. For a description of the response message, see [Table 1181](#).

Table 1181. Response Message Description: LSClinicalGetEmployeesQueryById, LSClinicalGetEmployeesQueryByExample and LSClinicalGetEmployeesQueryPage

Node	Description	Type
Employee.Id	Row ID of the employee.	Character data
Employee.EMailAddr	Email address.	Character data
Employee.FirstName	First name.	Character data
Employee.JobTitle	Job title.	Character data
Employee.LastName	Last name.	Character data
Employee.LoginName	User ID.	Character data
Employee.Phone	Phone number.	Number
RelatedPosition.Division	Employee division.	Character data
RelatedResponsibility.Responsibility	Employee responsibility.	Character data

SWILSClinicalGetEmployees Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1182](#).

Table 1182.SWILSClinicalGetEmployees Service Object

Name	Boundary Object Type	Class
LS Clinical Get Employees	Business Service	CSSEAIDataSyncService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1183](#).

Table 1183.SWILSClinicalGetEmployees Data Object

Siebel Repository Name	External Name
LS Clinical Employee Interface	Employee

Example Package for SWILSClinicalGetEmployees

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```

... \SWILSClinicalGetEmployees\SWILSClinicalGetEmployees-QueryByExample-request.xml
... \SWILSClinicalGetEmployees\SWILSClinicalGetEmployees-QueryPage-request.xml
... \SWILSClinicalGetEmployees\SWILSClinicalGetEmployees-QueryById-request.xml
    
```

Interface Description (WSDL) for SWILSClinicalGetEmployees

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

```

... \SWILSClinicalGetEmployees\SWILSClinicalGetEmployees-QueryByExample.WSDL
... \SWILSClinicalGetEmployees\SWILSClinicalGetEmployees-QueryPage.WSDL
... \SWILSClinicalGetEmployees\SWILSClinicalGetEmployees-QueryById.WSDL
    
```

SWILSClinicalGetSiteContacts

Use this Web service to retrieve all protocol site contacts. An external application can invoke this Web service using valid Siebel application user credentials for authentication. Additionally, consider the following:

- If the page size field is left blank in the LSClinicalGetSiteContactsQueryPage operation, then the Web service returns an error message. Only provided tags can be used with this operation.
- The LSClinicalGetSiteContactsQueryById operation supports only one instance of a Siebel message.
- The mobile application user may want to add a new contact to the 'Attendees' list in clinical trip report.
- In this case, the mobile user must have all contacts of that site in the mobile server side, so that one can add more contacts to attendees in clinical trip report. This Web service helps by returning all those site contacts to external application.

SWILSClinicalGetSiteContacts Operations

For a list of operations associated with this Web service, see [Table 1184](#).

Table 1184. SWILSClinicalGetSiteContacts Operations

Operation Name	Description
LSClinicalGetSiteContactsQueryById	Used to send contacts of a site given the Site Row ID.
LSClinicalGetSiteContactsQueryPage	Used to send contacts of multiple sites in pages.
LSClinicalGetSiteContactsQueryByExample	Used to send contacts of multiple sites as a single result set.

Request Message Description: LSClinicalGetSiteContactsQueryById

Use this operation if the external application requires the contacts associated with a particular site. The operation passes the site row ID that corresponds to each requested contact. For a description of this request message, see [Table 1185](#).

Table 1185. Request Message Description: LSClinicalGetSiteContactsQueryById

Node	Description	Type
PrimaryRowId	Required. Protocol site row ID.	Character data

Request Message Description: LSClinicalGetSiteContactsQueryByExample

Use this operation to query contacts from a limited number of sites. Different search criteria can be used. For a description of this request message, see [Table 1186](#).

Table 1186. Request Message Description: LSClinicalGetSiteContactsQueryByExample

Node	Description	Type
ClinicalProtocolSite.Id	Optional. Row ID of protocol site.	Character data
ClinicalProtocolSite. Searchspec	Optional. Search specification.	Character data
ClinicalProtocolSite. SiteNumber	Optional. Site number.	Character data
ClinicalProtocolSite. SiteUIId	Optional. Site ID.	Character data
ClinicalAccountInvestigatorRole.Id	Optional. Row ID of the site contact.	Character data
ClinicalAccountInvestigatorRole. ConflictId	Optional. Conflict ID.	Character data
ClinicalAccountInvestigatorRole. Searchspec	Optional. Search specification.	Character data
ClinicalAccountInvestigatorRole. City	Optional. Contact's city.	Character data
ClinicalAccountInvestigatorRole. ContactId	Optional. Row ID of contact.	Character data
ClinicalAccountInvestigatorRole. Country	Optional. Contact's country.	Character data
ClinicalAccountInvestigatorRole. EmailAddress	Optional. Contact's email address.	Character data
ClinicalAccountInvestigatorRole. FaxPhone	Optional. Contact's fax and phone number.	Character data
ClinicalAccountInvestigatorRole. FirstName	Optional. Contact's first name.	Character data
ClinicalAccountInvestigatorRole. LastName	Optional. Contact's last name.	Character data
ClinicalAccountInvestigatorRole. MiddleName	Optional. Contact's middle name.	Character data
ClinicalAccountInvestigatorRole. PostalCode	Optional. Postal code.	Character data
ClinicalAccountInvestigatorRole. PrimaryPersonalAddressId	Optional. Primary address ID.	Character data
ClinicalAccountInvestigatorRole. PrimarySpecialty	Optional. Primary medical specialty.	Character data
ClinicalAccountInvestigatorRole. Region	Optional. Region.	Character data
ClinicalAccountInvestigatorRole. Role	Optional. Role.	Character data
ClinicalAccountInvestigatorRole. State	Optional. State.	Character data

Table 1186. Request Message Description: LSClinicalGetSiteContactsQueryByExample

Node	Description	Type
ClinicalAccountInvestigatorRole. StreetAddress	Optional. Street address.	Character data
ClinicalAccountInvestigatorRole. WorkPhone	Optional. Work phone.	Character data

Request Message Description: LSClinicalGetSiteContactsQueryPage

Use this operation to query the contacts from all, or a large number of sites. For a description of this request message, see [Table 1187](#).

Table 1187. Request Message Description: LSClinicalGetSiteContactsQueryPage

Node	Description	Type
ClinicalProtocolSite.Id	Required. Can be either an asterisk (*), or the row ID of the protocol site.	Character data
ClinicalProtocolSite. SiteUIId	Required. Can be either an asterisk (*), or the site ID.	Character data
ClinicalAccountInvestigatorRole.Id	Required. Can be either an asterisk (*), or the row ID the site contact.	Character data
ClinicalAccountInvestigatorRole. ContactId	Required. Can be either an asterisk (*), or the row ID of the contact.	Character data
ClinicalAccountInvestigatorRole. FirstName	Required. Can be either an asterisk (*), or the contact's first name.	Character data
ClinicalAccountInvestigatorRole. LastName	Required. Can be either an asterisk (*), or the contact's last name.	Character data

Response Message Description: LSClinicalGetSiteContactsQueryPage, LSClinicalGetSiteContactsQueryById and LSClinicalGetSiteContactsQueryByExample

For a description of the response messages, see [Table 1188](#).

Table 1188. Response Message Description: LSClinicalGetSiteContactsQueryPage, LSClinicalGetSiteContactsQueryById and LSClinicalGetSiteContactsQueryByExample

Node	Description	Type
ClinicalProtocolSite. SiteNumber	Site Number.	Character data
ClinicalProtocolSite. SiteUIId	Site ID.	Character data

Table 1188. Response Message Description: LSClinicalGetSiteContactsQueryPage, LSClinicalGetSiteContactsQueryById and LSClinicalGetSiteContactsQueryByExample

Node	Description	Type
ClinicalAccountInvestigatorRole.Id	Row ID of the site contact.	Character data
ClinicalAccountInvestigatorRole. City	Contact's city.	Character data
ClinicalAccountInvestigatorRole. ContactId	Row ID of the contact.	Character data
ClinicalAccountInvestigatorRole. Country	Contact's country.	Character data
ClinicalAccountInvestigatorRole. EmailAddress	Contact's email.	Character data
ClinicalAccountInvestigatorRole. FaxPhone	Contact's fax, and phone number.	Character data
ClinicalAccountInvestigatorRole. FirstName	Contact's first name.	Character data
ClinicalAccountInvestigatorRole. LastName	Contact's last name.	Character data
ClinicalAccountInvestigatorRole. MiddleName	Contact's middle name	Character data
ClinicalAccountInvestigatorRole. PostalCode	Postal code.	Character data
ClinicalAccountInvestigatorRole. PrimaryPersonalAddressId	Primary address ID.	Character data
ClinicalAccountInvestigatorRole. PrimarySpecialty	Primary medical specialty.	Character data
ClinicalAccountInvestigatorRole. Region	Region.	Character data
ClinicalAccountInvestigatorRole. Role	Role.	Character data
ClinicalAccountInvestigatorRole. State	State.	Character data
ClinicalAccountInvestigatorRole. StreetAddress	Street address.	Character data
ClinicalAccountInvestigatorRole. WorkPhone	Work phone.	Character data

SWILSClinicalGetSiteContacts Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1189](#).

Table 1189.SWILSClinicalGetSiteContacts Service Object

Name	Boundary Object Type	Class
LS Clinical GetSiteContacts	Business Service	CSSEAIDataSyncService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1190](#).

Table 1190.SWILSClinicalGetSiteContacts Data Object

Siebel Repository Name	External Name
LS Clinical Protocol Site_Clinical Account Investigator Role	Clinical Protocol Site

Example Package for SWILSClinicalGetSiteContacts

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```

... \SWILSClinicalGetSiteContacts\SWILSClinicalGetSiteContacts-QueryById-request.xml
... \SWILSClinicalGetSiteContacts\SWILSClinicalGetSiteContacts-QueryByExample-request.xml
... \SWILSClinicalGetSiteContacts\SWILSClinicalGetSiteContacts-QueryPage-request.xml
    
```

Interface Description (WSDL) for SWILSClinicalGetSiteContacts

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

```

... \SWILSClinicalGetSiteContacts\SWILSClinicalGetSiteContacts-QueryByExample.WSDL
... \SWILSClinicalGetSiteContacts\SWILSClinicalGetSiteContacts-QueryPage.WSDL
... \SWILSClinicalGetSiteContacts\SWILSClinicalGetSiteContacts-QueryById.WSDL
    
```

SWILSClinicalGetSiteSnapshot

This Web service captures a snapshot of subject status accrual data and returns the resulting data. An external application can invoke this Web service with any valid Siebel CRM user credentials for authentication. The Web service returns an error message if the SiteVisitId field is blank.

SWILSClinicalGetSiteSnapshot Operations

For a list of operations associated with this Web service, see [Table 1191](#).

Table 1191.SWILSClinicalGetSiteSnapshot Operations

Operation Name	Description
CaptureSnapshot	Captures subject status accruals data and returns the same to external application.

Request Message Description: CaptureSnapshot

For a description of this request message, see [Table 1192](#).

Table 1192.Request Message Description: CaptureSnapshot

Node	Description	Type
SiteVisitId	Required. Site visit row ID.	Character data
CaptureSnapshot	Optional. Default N. Value 'Y' will capture the data and returns the results. Value 'N' will return only the existing data.	Character data

Response Message Description: CaptureSnapshot

For a description of this response message, see [Table 1192](#).

Table 1193.Response Message Description: CaptureSnapshot

Node	Description	Type
Id	Row ID.	Character data
ActualNumber	Actual number.	Number
Comments	Comments.	Character data
ReviewerComments	Reviewer comments	Character data
AccrualsNumber	Accruals number.	Character data
SiteVisit	Site visit.	Character data
StatusCode	Status code.	Character data

Table 1193. Response Message Description: CaptureSnapshot

Node	Description	Type
TimeStamp	Time stamp.	Date
VisitTypeCode	Visit type code.	Character data

SWILSClinicalGetSiteSnapshot Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1194](#).

Table 1194. SWILSClinicalGetSiteSnapshot Service Object

Name	Boundary Object Type	Class
LS Clinical Get Site Snapshot Service	Workflow	Not applicable

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1195](#).

Table 1195. SWILSClinicalGetSiteSnapshot Data Object

Siebel Repository Name	External Name
LS Clinical Subject Status Snapshot IO	Clinical Trip Report

Example Package for SWILSClinicalGetSiteSnapshot

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \SWILSClinicalGetSiteSnapshot\SWILSClinicalGetSiteSnapshot-CaptureSnapshot-request.xml
```

Response

See the following file to view the sample code:

```
... \SWILSClinicalGetSiteSnapshot\SWILSClinicalGetSiteSnapshot-response.xml
```

Interface Description (WSDL) for SWILSClinicalGetSiteSnapshot

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

...\SWILSClinicalGetSiteSnapshot\SWILSClinicalGetSiteSnapshot.WSDL

SWILSClinicalGetSmartScriptDetails

This Web service returns smart script details such as questions, pages, question branching, and page branching details.

SWILSClinicalGetSmartScriptDetails Operations

For a list of operations associated with this Web service, see [Table 1196](#).

Table 1196. SWILSClinicalGetSmartScriptDetails Operations

Operation Name	Description
SmartScriptQueryById	Returns smart script details for the smart script whose row ID matches the given Row ID.
SmartScriptQueryByExample	Used to query smart scripts on different criteria. If no input is provided for any tag, then the Web service returns all smart script details from the system.

Request Message Description: SmartScriptQueryById

This operation accepts the Row ID of a smart script and returns the details of that particular smart script.

Request Message Description: SmartScriptQueryByExample

This operation has several tags to accept the input. You can provide input to any of the tags to retrieve specific details. No field is mandatory. The most important tag is "Name" which accepts the smart script name and returns the details of that specific to the smart script.

Response Message Description: SmartScriptQueryById and SmartScriptQueryByExample

For an example of the response message, see ["Example Package for SWILSClinicalGetSmartScriptDetails"](#) on page 579.

SWILSClinicalGetSmartScriptDetails Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1197](#).

Table 1197.SWILSClinicalGetSmartScriptDetails Service Object

Name	Boundary Object Type	Class
LS Clinical Get Smart Script Details	Business Service	CSSEAIDataSyncService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1198](#).

Table 1198.SWILSClinicalGetSmartScriptDetails Data Object

Siebel Repository Name	External Name
LS Clinical Get Smart Script Details IO	LS Clinical Smart Scripts
LS Clinical Get Smart Script Details Internal IO	LS Clinical Smart Scripts

Example Package for SWILSClinicalGetSmartScriptDetails

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```

... \SWILSClinicalGetSmartScriptDetails\SWILSClinicalGetSiteSnapshot-QueryByExample-request.xml
... \SWILSClinicalGetSmartScriptDetails\SWILSClinicalGetSiteSnapshot-QueryById-request.xml
    
```

Response

See the following file to view the sample code:

```

... \SWILSClinicalGetSmartScriptDetails\SWILSClinicalGetSmartScriptDetails-response.xml
    
```

Interface Description (WSDL) for SWILSClinicalGetSmartScriptDetails

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

```

... \SWILSClinicalGetSmartScriptDetails\SWILSClinicalGetSmartScriptDetails.WSDL
    
```

SWILSClinicalGetStateModelService

Use this Web service to send the state transitions for a given state model name. An external application can invoke this Web service using any valid Siebel application user credentials for authentication. Additionally, consider the following:

- If no input is provided for any tags in the LSClinicalGetStateModelServiceQueryByExample operation, then the Web service returns all state transitions for all state models in the Clinical Trial Management System application. An error message might result if the result set is large in number, then the user is prompted to refine the search.
- An external application can invoke this Web service with either operation depending on the scenario.
- If the page size field is left blank in the LSClinicalGetStateModelServiceQueryPage operation, then the Web service returns an error message.
- The mobile application user may want to update the trip report status from one state to the next valid state. The user must know the valid To Status value from the current status. In this case, the mobile user must have all valid states for a given state model name.
- Use this Web service to return all valid state transitions for a given state model name.

SWILSClinicalGetStateModelService Operations

For a list of operations associated with this Web service, see [Table 1199](#).

Table 1199.SWILSClinicalGetStateModelService Operations

Operation Name	Description
LSClinicalGetStateModelServiceQueryPage	Returns state model transitions in pages.
LSClinicalGetStateModelServiceQueryByExample	Returns state model transitions as one result set.

Request Message Description: LSClinicalGetStateModelServiceQueryByExample

You can invoke this operation in this Web service with a state model name value so that only related state model transitions are returned. If you provide no input, then all the state model transition values are returned. For a description of this request message, see [Table 1200](#).

Table 1200.Request Message Description: LSClinicalGetStateModelServiceQueryByExample

Node	Description	Type
StateModel.Id	Optional. Row ID of state model name.	Character data
StateModel. Searchspec	Optional. Search specification.	Character data
StateModel.Name	Optional. State model name.	Character data

Table 1200. Request Message Description: LSClinicalGetStateModelServiceQueryByExample

Node	Description	Type
StateModel-Transition.Id	Optional. Row ID of the transition record.	Character data
StateModel-Transition.FromStateName	Optional. From state name.	Character data
StateModel-Transition.PublicFlag	Optional. Public flag. Values are Y or N.	Boolean
StateModel-Transition.RuleExpression	Optional. Rule expression.	Character data
StateModel-Transition.RuleFieldName	Optional. Rule field name.	Character data
StateModel-Transition.RuleOperator	Optional. Rule operator.	Character data
StateModel-Transition.RuleValue	Optional. Rule value.	Character data
StateModel-Transition.ToStateName	Optional. To state name. A user can change the status drop down value from one state to another state.	Character data

Request Message Description: LSClinicalGetStateModelServiceQueryPage

You can invoke this operation with the state model name value so that only related state model transitions are returned. If all state model transition values are required, then pass an asterisk (*) for all nodes. The result set will be in pages with a page size. For a description of this request message, see [Table 1201](#).

Table 1201. Request Message Description: LSClinicalGetStateModelServiceQueryPage

Node	Description	Type
StateModel.Id	Required. The row ID of the state model name. Can be either an asterisk (*), or a valid row ID.	Character data
StateModel.Name	Required. State model name. Can be either an asterisk (*), or a valid state model name.	Character data
StateModel-Transition.Id	Required. Row ID of transition record. Can be either an asterisk (*), or the row ID of the transition state.	Character data
StateModel-Transition.FromStateName	Required. From state name. Can be either an asterisk (*), or From State name.	Character data

Table 1201. Request Message Description: LSClinicalGetStateModelServiceQueryPage

Node	Description	Type
StateModel-Transition. PublicFlag	Required. Public flag. Possible values are Y or N. Can be either an asterisk (*), or public flag.	Boolean
StateModel-Transition. ToStateName	Required. To state name. Can be either an asterisk (*), or To State name.	Character data

Response Message Description: LSClinicalGetStateModelServiceQueryByExample and LSClinicalGetStateModelServiceQueryPage

For a description of this request message, see [Table 1202](#).

Table 1202. Response Message Description: LSClinicalGetStateModelServiceQueryByExample and LSClinicalGetStateModelServiceQueryPage

Node	Description	Type
StateModel.Id	Row ID of the state model name.	Character data
StateModel.Name	State model name.	Character data
StateModel-Transition. FromStateName	From State name.	Character data
StateModel-Transition. PublicFlag	Public flag. Possible values are Y or N.	Boolean
StateModel-Transition. RuleExpression	Rule expression.	Character data
StateModel-Transition. RuleFieldName	Rule field name.	Character data
StateModel-Transition. RuleOperator	Rule operator.	Character data
StateModel-Transition. RuleValue	Rule value.	Character data
StateModel-Transition. ToStateName	To State name.	Character data

SWILSClinicalGetStateModelService Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1203](#).

Table 1203.SWILSClinicalGetStateModelService Service Object

Name	Boundary Object Type	Class
LS Clinical Get State Model Service	Business Service	CSSEAIDataSyncService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1204](#).

Table 1204.SWILSClinicalGetStateModelService Data Object

Siebel Repository Name	External Name
LS Clinical State Model - Interface IO	State Model

Example Package for SWILSClinicalGetStateModelService

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```

... \SWILSClinicalGetStateModelService\SWILSClinicalGetStateModelService-
QueryByExample-request.xml

... \SWILSClinicalGetStateModelService\SWILSClinicalGetStateModelService-QueryPage-
request.xml
    
```

Interface Description (WSDL) for SWILSClinicalGetStateModelService

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

```

... \SWILSClinicalGetStateModelService\SWILSClinicalGetStateModelService-
QueryByExample.WSDL

... \SWILSClinicalGetStateModelService\SWILSClinicalGetStateModelService-QueryPage.WSDL
    
```

SWILSClinicalGetSubjectVisitDetails

Use this Web service to send all subject visit details from a particular protocol site. An external application can invoke this Web service using any valid Siebel application user credentials for authentication. Additionally, consider the following:

- If no input is provided for any tags in LSclinicalGetSubjectVisitDetailsQueryByExample operation, then the Web service returns all subject visit details. An error message might result if the result set is larger than the predefined maximum size, and then the user is prompted to refine the search.
- An external application can invoke this Web service with any methods depends on the scenario.
- This Web service will return an error message if the page size is left blank on the QueryPage method.
- Only provided tags need to be used with the QueryPage method.
- The mobile application user might want to add or update a new Case Report form record to a trip report. Is so, then the user must have all the available subject visit details for a particular protocol site at the target host.
- The external user can use this Web service to get all subject visit details for a given search criteria.

SWILSClinicalGetSubjectVisitDetails Operations

For a list of operations associated with this Web service, see [Table 1205](#).

Table 1205.SWILSClinicalGetSubjectVisitDetails Operations

Operation Name	Description
LSclinicalGetSubjectVisitDetailsQueryById	Returns subject visit details for a given protocol site ID.
LSclinicalGetSubjectVisitDetailsQueryPage	Returns subject visit details in pages.
LSclinicalGetSubjectVisitDetailsQueryByExample	Returns subject visit details in a single result set based on a given search criteria.

Request Message Description: LSClinicalGetSubjectVisitDetailsQueryByExample

You can invoke this operation with the protocol site ID to ensure that only the corresponding site related to subject visits is returned. If no input is provided, then all the subject visits from all sites are returned. For a description of this request message, see [Table 1206](#).

Table 1206. Request Message Description: LSClinicalGetSubjectVisitDetailsQueryByExample

Node	Description	Type
Id	Optional. Row ID of subject visit record.	Character data
Searchspec	Optional. Search specification.	Character data
CRFPages	Optional. Number of Case Report form pages.	Integer
ActivityUID	Optional. Activity ID.	Character data
Category	Optional. Category, such as Visit.	Character data
ParentActivityId	Optional. Parent activity ID.	Character data
ParentTemplateVersionId	Optional. Parent template version.	Character data
ProtocolSiteId	Optional. Protocol site ID.	Character data
Screen	Optional. Subject screen number.	Character data
SubjectDOB	Optional. Date of birth.	Date and time
SubjectId	Optional. Subject row ID.	Character data
SubjectInitial	Optional. Subject initials.	Character data
Template	Optional. Template.	Character data
TemplateFlag	Optional. Template flag.	Character data
TemplateId	Optional. Template ID.	Character data
TemplateVersion	Optional. Template version.	Character data
Type	Optional. Visit type.	Character data

Request Message Description: LSClinicalGetSubjectVisitDetailsQueryPage

Invoke this method by passing an asterisk (*) to all of the tags to return all subject visit details from all sites. The result set is returned in pages with page size. For a description of this request message, see [Table 1207](#).

Table 1207. Request Message Description: LSClinicalGetSubjectVisitDetailsQueryPage

Node	Description	Type
Id	Required. Row ID of a subject visit record. Can be either an asterisk (*), or a valid row ID.	Character data
ActivityUID	Required. Activity ID. Can be either an asterisk (*), or a valid activity ID.	Character data
Category	Required. A category such as Visit, and so on. Can be either an asterisk (*), or a valid category value.	Character data
ParentTemplateVersionId	Required. Parent template version. Can be either an asterisk (*), or a valid parent template version ID.	Character data
ProtocolSiteId	Required. Protocol site ID. Can be either an asterisk (*), or a valid protocol site ID.	Character data
Screen	Required. Subject screen number. Can be either an asterisk (*), or a valid screen value.	Character data
SubjectId	Required. Subject row ID. Can be either an asterisk (*), or a valid subject ID.	Character data
SubjectInitial	Required. Subject initial. Can be either an asterisk (*), or a valid subject initial value.	Character data
Template	Required. Template. Can be either an asterisk (*), or a valid template value.	Character data
TemplateFlag	Required. Template flag. Can be either an asterisk (*), or a valid template flag. Values are Y or N.	Character data
TemplateId	Required. Template ID. Can be either an asterisk (*), or a valid template ID.	Character data
TemplateVersion	Required. Template version. Can be either an asterisk (*), or a valid template version.	Character data
Type	Required. Visit type. Can be either an asterisk (*), or a valid type value.	Character data

Request Message Description: LSClinicalGetSubjectVisitDetailsQueryById

One can invoke this method in this Web service by passing the exact Row Id of a particular subject visit record. For a description of this request message, see [Table 1208](#).

Table 1208.Request Message Description: LSClinicalGetSubjectVisitDetailsQueryById

Node	Description	Type
PrimaryRowId	Required. The primary row ID of the subject visit record.	Character data

Response Message Description: LSClinicalGetSubjectVisitDetailsQueryByExample, LSClinicalGetSubjectVisitDetailsQueryPage and LSClinicalGetSubjectVisitDetailsQueryById

For a description of this request message, see [Table 1209](#).

Table 1209.Response Message Description: LSClinicalGetSubjectVisitDetailsQueryByExample, LSClinicalGetSubjectVisitDetailsQueryPage and LSClinicalGetSubjectVisitDetailsQueryById

Node	Description	Type
Id	Row ID of the subject visit record.	Character data
CRFPages	The number of case report form pages	Integer
ActivityUID	Activity ID.	Character data
Category	Category, such as visit, and so on.	Character data
ParentActivityId	Parent activity ID.	Character data
ParentTemplateVersionId	Parent template version.	Character data
ProtocolSiteId	Protocol site ID.	Character data
Screen	Subject screen number.	Character data
SubjectDOB	Date of birth.	Date Time
SubjectId	Subject row ID.	Character data
SubjectInitial	Subject initial.	Character data
Template	Template.	Character data
TemplateFlag	Template flag.	Character data
TemplateId	Template ID.	Character data
TemplateVersion	Template version.	Character data
Type	Visit type.	Character data

SWILSClinicalGetSubjectVisitDetails Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1210](#).

Table 1210.SWILSClinicalGetSubjectVisitDetails Service Object

Name	Boundary Object Type	Class
LS Clinical GetSubjectVisitDetails	Business Service	CSSEAIDataSyncService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1211](#).

Table 1211.SWILSClinicalGetSubjectVisitDetails Data Object

Siebel Repository Name	External Name
LS Clinical Subject Visit Plan	LS Clinical Visit Plan

Example Package for SWILSClinicalGetSubjectVisitDetails

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
...\SWILSClinicalGetSubjectVisitDetails\SWILSClinicalGetSubjectVisitDetails-QueryByExample-request.xml
```

```
...\SWILSClinicalGetSubjectVisitDetails\SWILSClinicalGetSubjectVisitDetails-QueryById-request.xml
```

```
...\SWILSClinicalGetSubjectVisitDetails\SWILSClinicalGetSubjectVisitDetails-QueryPage-request.xml
```

Interface Description (WSDL) for SWILSClinicalGetSubjectVisitDetails

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

```
...\SWILSClinicalGetSubjectVisitDetails\SWILSClinicalGetSubjectVisitDetails-QueryByExample.WSDL
```

...\SWILSClinicalGetSubjectVisitDetails\SWILSClinicalGetSubjectVisitDetails-QueryPage.WSDL

...\SWILSClinicalGetSubjectVisitDetails\SWILSClinicalGetSubjectVisitDetails-QueryById.WSDL

SWILSClinicalInsertEmployees

Use this Web service to insert employees into the Assigned To MVG for check list items, followup items, all followup items, and site visit team. You can also use this Web service to remove employees from Assigned To MVG for check list items, followup items, all followup items, and site visit team. The external application can invoke this Web service using any valid Siebel application user credentials for authentication. Additionally, consider the following:

- If no input is provided for any tags in both operations, then an error message is generated.
- An external application can invoke this Web service with any operation depending on the scenario.
- Mobile application users can assign or delete employees to or from the Assigned To fields in check list items, individual followup items, all followup items, and site visit teams.

SWILSClinicalInsertEmployees Operations

For a list of operations associated with this Web service, see [Table 1212](#).

Table 1212. SWILSClinicalInsertEmployees Operations

Operation Name	Description
LSClinicalInsertEmployeesInsert	Used to insert employees into the Assigned To field for different item types.
LSClinicalInsertEmployeesDelete	Used to delete employees from the Assigned To field in different item types.

Request Message Description: LSClinicalInsertEmployeesInsert

This operation can be invoked to insert employees either into a site visit team or into the Assigned To field in check list items, followup items, or all followup items. For a description of this request message, see [Table 1213](#).

Table 1213. Request Message Description: LSClinicalInsertEmployeesInsert

Node	Description	Type
ActivityId	Required. Activity ID.	Character data.
EmpId	Required. Employee ID.	Character data.

Request Message Description: LSClinicalInsertEmployeesDelete

Invoke this operation to delete employees either from a site visit team or from the Assigned To field in check list items, followup items, or all followup items. For a description of this request message, see [Table 1214](#).

Table 1214.Request Message Description: LSClinicalInsertEmployeesDelete

Node	Description	Type
ActivityId	Required. Activity ID.	Character data.
EmpId	Required. Employee ID.	Character data.

SWILSClinicalInsertEmployees Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1215](#).

Table 1215.SWILSClinicalInsertEmployees Service Object

Name	Boundary Object Type	Class
LS Clinical Insert Employees	Business Service	CSSEAIDataSyncService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1216](#).

Table 1216.SWILSClinicalInsertEmployees Data Object

Siebel Repository Name	External Name
LS Clinical Checklist Assignee	LS Clinical Checklist Assignee

Example Package for SWILSClinicalInsertEmployees

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```

... \SWILSClinicalInsertEmployees\SWILSClinicalInsertEmployees-Insert-request.xml
... \SWILSClinicalInsertEmployees\SWILSClinicalInsertEmployees-Delete-request.xml
    
```

Interface Description (WSDL) for SWILSClinicalInsertEmployees

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

...\SWILSClinicalInsertEmployees\SWILSClinicalInsertEmployees-Insert.WSDL

...\SWILSClinicalInsertEmployees\SWILSClinicalInsertEmployees-Delete.WSDL

SWILSClinicalListOfValues

Use this Web service to send the LOV details for a given LOV type from a Siebel CRM application. The third-party application can invoke this Web service using any valid Siebel CRM user ID as authentication.

- An external application can invoke this Web service with either operation depending on the scenario.
- This Web service returns an error message when the LOVQueryPage operation is used with blank page size.
- If no input is provided for the tags in the LOVQueryByExample operation, then the Web service will attempt to return all the available records from the Siebel database. If this result set exceeds the predefined maximum size, then the Web service returns an error which instructs the user to refine the search criteria.
- Use only provided tags with the LOVQueryPage operation.
- Mobile users have all available LOV values on the mobile server to allow them to choose values for clinical trip reports.

SWILSClinicalListOfValues Operations

For a list of operations associated with this Web service, see [Table 1217](#).

Table 1217. SWILSClinicalListOfValues Operations

Operation Name	Description
LOVQueryPage	Used to send LOV details for a given LOV type.
LOVQueryByExample	Used to send LOV details for a given LOV type.

Request Message Description: LOVQueryPage

Use this operation when the given search specification retrieves a large number of records at the root component. To avoid returning one large Siebel message, you can specify the number of records to be returned using the PageSize argument. For a description of this request message, see [Table 1218](#).

Table 1218.Request Message Description: LOVQueryPage

Node	Description	Type
Language	Required. A valid language code such as ENU. Can be either an asterisk (*), or a valid Language code.	Character data
LanguageName	Required. The name of the language which can be either an asterisk (*), or a valid language name such as English-American.	Character data
Modifiable	Required. Modifiable flag which can be either an asterisk (*), or a valid Boolean flag such as Y or N.	Boolean
Multilingual	Required. Multilingual flag which can be either an asterisk (*), or a valid Boolean flag such as Y or N.	Boolean
Name	Required. Language independent code (LIC) which can be either an asterisk (*), or a valid LIC code.	Character data
ReplicationLevel	Required. Replication level which can be either an asterisk (*), or a valid replication level.	Character data
Translate	Required. The Translate flag which can be either an asterisk (*), or a valid Boolean flag such as Y or N.	Boolean
Type	Required. LOV Type. Can be either an asterisk (*), or a valid LOV type.	Character data
Value	Required. Display value Can be either an asterisk (*), or a valid display value.	Character data

Request Message Description: LOVQueryByExample

Use this operation if the external application requires only a limited number of LOV type values. For example, to get all LOV type values for all LOVs whose name starts with AAG, then you can call this method with Type value set as follows:

AAG*

If this operation is invoked with no input for any fields, then the Web service attempts to return all the LOV records as one Siebel message. If the number of LOV records is more than the predefined maximum page size, then the Web service returns an error message prompting the user to refine the search criteria. This operation requires the use of some criteria such as Type, Language, Order By, and so on.

For a description of this request message, see [Table 1219](#).

Table 1219. Request Message Description: LOVQueryByExample

Node	Description	Type
Id	Optional. Row ID of LOV type value.	Character data
Searchspec	Optional. Search specification.	Character data
Active	Optional. Active or inactive flag.	Boolean
Bitmap	Optional. Bit map.	Character data
BitmapId	Optional. Bit map ID.	Character data
ClassCode	Optional. Class code.	Character data
Description	Optional. Description of the LOV type value.	Character data
High	Optional. High value range.	Character data
Language	Optional. Language code.	Character data
LanguageName	Optional. Name of the language.	Character data
Low	Optional. Low value range.	Character data
Modifiable	Optional. Modifiable flag.	Boolean
Multilingual	Optional. Multilingual flag.	Boolean
Name	Optional. Language independent code.	Character data
OrderBy	Optional. Order by value.	Number
OrganizationId	Optional. Organization ID.	Character data
Parent	Optional. Parent LIC Code.	Character data
ParentId	Optional. Parent LIC code row ID.	Character data
ReplicationLevel	Optional. Replication level.	Character data
SubType	Optional. Name of parent LIC.	Character data
TargetHigh	Optional. Target high value in a range.	Number
TargetLow	Optional. Target low value in a range.	Number
Translate	Optional. Translate flag.	Boolean
Type	Optional. LOV type.	Character data
Value	Optional. Display value.	Character data
WeightingFactor	Optional. Weighting factor.	Number

Response Message Description: LOVQueryByExample and LOVQueryPage

For a description of this response message, see [Table 1220](#).

Table 1220. Response Message Description: LOVQueryByExample and LOVQueryPage

Node	Description	Type
Id	Row Id of LOV type value.	Character data
Active	Active or Inactive Flag.	Boolean
Bitmap	Bit map.	Character data
BitmapId	Bit map ID.	Character data
ClassCode	Class code.	Character data
Description	Description of LOV type value.	Character data
High	High value in a range.	Character data
Language	Language code.	Character data
LanguageName	Name of the language.	Character data
Low	Low value in a range.	Character data
Modifiable	Modifiable flag.	Boolean
Multilingual	Multilingual flag.	Boolean
Name	Language independent code.	Character data
OrderBy	Order by value.	Number
OrganizationId	Organization ID.	Character data
Parent	Parent LIC code.	Character data
ParentId	Parent LIC code row ID.	Character data
ReplicationLevel	Replication level.	Character data
SubType	Name of parent LIC.	Character data
TargetHigh	Target high value in a range.	Number
TargetLow	Target low value in a range.	Number
Translate	Translate flag.	Boolean
Type	LOV type.	Character data
Value	Display value.	Character data
WeightingFactor	Weighting factor.	Number

SWILSClinicalListOfValues Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1221](#).

Table 1221.SWILSClinicalListOfValues Service Object

Name	Boundary Object Type	Class
LS Clinical List Of Value Service	Business Service	CSSEAIDataSyncService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1222](#).

Table 1222.SWILSClinicalListOfValues Data Objects

Siebel Repository Name	External Name
LS Clinical List Of Values	List Of Values

Example Package for SWILSClinicalListOfValues

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```

... \SWILSClinicalListOfValues\SWILSClinicalListOfValues-QueryPage-request.xml
... \SWILSClinicalListOfValues\SWILSClinicalListOfValues-QueryByExample-request.xml
    
```

Interface Description (WSDL) for SWILSClinicalListOfValues

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

```

... \SWILSClinicalListOfValues\SWILSClinicalListOfValues-QueryByExample.WSDL
... \SWILSClinicalListOfValues\SWILSClinicalListOfValues-QueryPage.WSDL
    
```

SWILSClinicalProtocolSiteGetSites

Use this Web service to populate the My Sites view for a user based on provided login credentials. An external application can invoke this Web service by passing valid Siebel application user credentials for authentication. If a user tries to access another user's sites, then the Web service can be called with the user's login credentials and the other user's login name. In this case, the sites that are common to both users are returned. For example, if the user SADMIN wants to access his sites, then the Web service is called with SADMIN login credentials for Siebel authentication and the login name of the SADMIN user. If the SADMIN user wants to access sites assigned to CWALKER, then the Web service is called with the SADMIN login credentials for Siebel authentication and the login name of CWALKER. The result set will include only the sites that are common to SADMIN and CWALKER.

Additionally, consider the following:

- A PageSize variable with a value greater than 0 is required.
- This Web service supports sort specification (SortSpec) which is used to sort the output based on provided sort criteria.

SWILSClinicalProtocolSiteGetSites Operations

For a list of operations associated with this Web service, see [Table 1223](#).

Table 1223. SWILSClinicalProtocolSiteGetSites Operations

Operation Name	Description
QuerySites	Used to send sites belongs to the given user.

Request Message Description: QuerySites

For a description of this request message, see [Table 1224](#).

Table 1224. Request Message Description: QuerySites

Node	Description	Type
Login	Required. The login name of a user such as SADMIN, CWALKER, and so on.	Character data

Response Message Description: QuerySites

For a description of this request message, see [Table 1225](#).

Table 1225. Response Message Description: QuerySites

Parent Node	Field	Type
ClinicalProtocolSiteForMobileIntegration	Id	Character data
ClinicalProtocolSiteForMobileIntegration	AddressId	Character data
ClinicalProtocolSiteForMobileIntegration	AmountCurrencyCode	Character data
ClinicalProtocolSiteForMobileIntegration	AmountExchangeDate	Date

Table 1225. Response Message Description: QuerySites

Parent Node	Field	Type
ClinicalProtocolSiteForMobileIntegration	City	Character data
ClinicalProtocolSiteForMobileIntegration	ClinicalProgramName	Character data
ClinicalProtocolSiteForMobileIntegration	Country	Character data
ClinicalProtocolSiteForMobileIntegration	Email	Character data
ClinicalProtocolSiteForMobileIntegration	FaxNumber	Character data
ClinicalProtocolSiteForMobileIntegration	InitiationCompletedDate	Date
ClinicalProtocolSiteForMobileIntegration	InvestigatorFirstName	Character data
ClinicalProtocolSiteForMobileIntegration	InvestigatorFullName	Character data
ClinicalProtocolSiteForMobileIntegration	InvestigatorLastName	Character data
ClinicalProtocolSiteForMobileIntegration	PhoneNumber	Character data
ClinicalProtocolSiteForMobileIntegration	PrimaryInvestigatorId	Character data
ClinicalProtocolSiteForMobileIntegration	ProtocolId	Character data
ClinicalProtocolSiteForMobileIntegration	ProtocolNumber	Character data
ClinicalProtocolSiteForMobileIntegration	ProtocolSiteId	Character data
ClinicalProtocolSiteForMobileIntegration	ProtocolTitle	Character data
ClinicalProtocolSiteForMobileIntegration	Region	Character data
ClinicalProtocolSiteForMobileIntegration	SiteId	Character data
ClinicalProtocolSiteForMobileIntegration	SiteName	Character data
ClinicalProtocolSiteForMobileIntegration	SiteNumber	Character data
ClinicalProtocolSiteForMobileIntegration	SiteType	Character data
ClinicalProtocolSiteForMobileIntegration	State	Character data
ClinicalProtocolSiteForMobileIntegration	StreetAddress	Character data
ClinicalProtocolSiteForMobileIntegration	TerminatedDate	Date
ClinicalProtocolSiteForMobileIntegration	TotalContractAmount	Number
ClinicalProtocolSiteForMobileIntegration	WithholdingAmount	Number
ClinicalProtocolSiteForMobileIntegration	WithholdingPercentage	Number
ClinicalProtocolSiteForMobileIntegration	Zip	Character data
ClinicalProtocolSiteForMobileIntegration	PrimarySiteAddress	Character data
ClinicalProtocolSiteForMobileIntegration	AddressType	Character data
ClinicalProtocolSiteForMobileIntegration	PrimarySiteAddressId	Character data

Table 1225. Response Message Description: QuerySites

Parent Node	Field	Type
ClinicalProtocolSiteforMobileIntegration_SubjectTemplate	IRBApprovalDate	Date
ClinicalProtocolSiteforMobileIntegration_SubjectTemplate	Version	Character data
ClinicalAccountInvestigatorRole	Id	Character data
ClinicalAccountInvestigatorRole	City	Character data
ClinicalAccountInvestigatorRole	Country	Character data
ClinicalAccountInvestigatorRole	EmailAddress	Character data
ClinicalAccountInvestigatorRole	FaxPhone	Character data
ClinicalAccountInvestigatorRole	FirstName	Character data
ClinicalAccountInvestigatorRole	LastName	Character data
ClinicalAccountInvestigatorRole	PostalCode	Character data
ClinicalAccountInvestigatorRole	PrimarySpecialty	Character data
ClinicalAccountInvestigatorRole	Region	Character data
ClinicalAccountInvestigatorRole	Role	Character data
ClinicalAccountInvestigatorRole	State	Character data
ClinicalAccountInvestigatorRole	StreetAddress	Character data
ClinicalAccountInvestigatorRole	WorkPhone	Character data
LsClinicalAccountAddress	Id	Character data
LsClinicalAccountAddress	AccountId	Character data
LsClinicalAccountAddress	AccountLoc	Character data
LsClinicalAccountAddress	AccountName	Character data
LsClinicalAccountAddress	ActiveStatus	Character data
LsClinicalAccountAddress	AddressId	Character data
LsClinicalAccountAddress	AddressName	Character data
LsClinicalAccountAddress	AddressType	Character data
LsClinicalAccountAddress	Altitude	Number
LsClinicalAccountAddress	CLLI	Character data
LsClinicalAccountAddress	City	Character data
LsClinicalAccountAddress	Country	Character data
LsClinicalAccountAddress	DisableDataCleansing	Character data

Table 1225. Response Message Description: QuerySites

Parent Node	Field	Type
LsClinicalAccountAddress	EndDate	Date
LsClinicalAccountAddress	FaxNumber	Character data
LsClinicalAccountAddress	LATA	Character data
LsClinicalAccountAddress	Latitude	Number
LsClinicalAccountAddress	LocalOperatingCompany	Character data
LsClinicalAccountAddress	LocalOperatingCompany Site	Character data
LsClinicalAccountAddress	LocationFlag	Boolean
LsClinicalAccountAddress	LocationType	Character data
LsClinicalAccountAddress	Longitude	Number
LsClinicalAccountAddress	ParentAddress	Character data
LsClinicalAccountAddress	PhoneNumber	Character data
LsClinicalAccountAddress	PostalCode	Character data
LsClinicalAccountAddress	Prefix	Character data
LsClinicalAccountAddress	IsPrimaryAddress	Boolean
LsClinicalAccountAddress	RateCenter	Character data
LsClinicalAccountAddress	StartDate	Date
LsClinicalAccountAddress	State	Character data
LsClinicalAccountAddress	StreetAddress	Character data
LsClinicalAccountAddress	StreetAddress2	Character data
LsClinicalAccountAddress	Type	Character data
LsClinicalAccountAddress	UTMEasting	Character data
LsClinicalAccountAddress	UTMNorthing	Character data
ClinicalProtocolSiteAddressBc	Id	Character data
ClinicalProtocolSiteAddressBc	AddressLine1	Character data
ClinicalProtocolSiteAddressBc	AddressLine2	Character data
ClinicalProtocolSiteAddressBc	AddressType	Character data
ClinicalProtocolSiteAddressBc	City	Character data
ClinicalProtocolSiteAddressBc	Country	Character data
ClinicalProtocolSiteAddressBc	Description	Character data
ClinicalProtocolSiteAddressBc	Email	Character data

Table 1225. Response Message Description: QuerySites

Parent Node	Field	Type
ClinicalProtocolSiteAddressBc	Fax	Character data
ClinicalProtocolSiteAddressBc	ParentAddress	Character data
ClinicalProtocolSiteAddressBc	Phone	Character data
ClinicalProtocolSiteAddressBc	State	Character data
ClinicalProtocolSiteAddressBc	Zip	Character data
LsClinicalContactAddress	Id	Character data
LsClinicalContactAddress	ActiveFlag	Boolean
LsClinicalContactAddress	AddressId	Character data
LsClinicalContactAddress	AlignmentFlag	Boolean
LsClinicalContactAddress	City	Character data
LsClinicalContactAddress	Country	Character data
LsClinicalContactAddress	DEAExpr	Date
LsClinicalContactAddress	DEA	Character data
LsClinicalContactAddress	EndDate	Date Time
LsClinicalContactAddress	Fax	Character data
LsClinicalContactAddress	Phone	Character data
LsClinicalContactAddress	PostalCode	Character data
LsClinicalContactAddress	ProfessionalId	Character data
LsClinicalContactAddress	StartDate	Date Time
LsClinicalContactAddress	State	Character data
LsClinicalContactAddress	StreetAddress	Character data
LsClinicalContactAddress	Type	Character data
Contact	Id	Character data
Contact	CellularPhone	Character data
Contact	CompanyIdentifier	Character data
Contact	EmailAddress	Character data
Contact	FirstName	Character data
Contact	JobTitle	Character data
Contact	LastName	Character data
Contact	PersonUIId	Character data
Contact	Type	Character data

Table 1225. Response Message Description: QuerySites

Parent Node	Field	Type
Contact	WorkPhone	Character data
Contact_Position	EmployeeFirstName	Character data
Contact_Position	EmployeeLastName	Character data
Contact_Position	Position	Character data
Contact_Position	PositionId	Character data
Contact_Position	PositionPrimaryAddressId	Character data
Contact_Position	Login	Character data

SWILSClinicalProtocolSiteGetSites Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1226](#).

Table 1226. SWILSClinicalProtocolSiteGetSites Service Object

Name	Boundary Object Type	Class
LS Clinical Protocol Site Get Sites	Workflow	Not applicable
LS Clinical Protocol Site Get User Position	Workflow	Not applicable

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1227](#).

Table 1227. SWILSClinicalProtocolSiteGetSites Data Objects

Siebel Repository Name	External Name
LS Clinical Protocol Site Get Sites Input IO	Clinical Protocol Site for Mobile Integration
LS Clinical Protocol Site Get Sites Intermediate IO	Clinical Protocol Site for Mobile Integration
LS Clinical Protocol Site Get Sites Output IO	Clinical Protocol Site for Mobile Integration

Example Package for SWILSClinicalProtocolSiteGetSites

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \SWILSClinicalProtocolSiteGetSites\SWILSClinicalProtocolSiteGetSites_request.xml
```

Interface Description (WSDL) for SWILSClinicalProtocolSiteGetSites

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

```
... \SWILSClinicalProtocolSiteGetSites\SWILSClinicalProtocolSiteGetSites.WSDL
```

SWILSClinicalQueryProtocolSite_ SiteVisits

Use Siebel Life Sciences as the master system for the objects in the Study hierarchy, such as the protocol, site, and site visits. In a biotechnology or pharmaceutical company, after Protocols and Sites are created in the Siebel database, the information might be required in other downstream third-party applications used to study of protocol. Siebel Life Sciences can provide information on protocols, based on input parameters that are contained in the Web service request messages provided by third-party applications.

Requests can be limited by the User ID or by the protocol number, or both. When the input parameters of the Protocol Number field and User ID (Site Visit Team Member) are provided, the Web service returns only the information from the related sites and site visits. There is no output for users, protocols, or users who are not associated with the protocol.

SWILSClinicalQueryProtocolSite_ SiteVisits Operations

For a list of operations associated with this Web service, see [Table 1228](#).

Table 1228.SWILSClinicalQueryProtocolSite_ SiteVisits Operations

Name	Description
query	Queries the Clinical Trial Management System application to retrieve protocol, site, and site visit information.

Request Message Description: query

For a description of this request message, see [Table 1229](#).

Table 1229. Request Message Description: query

Node	Description	Type
UserId	Required. Passes a valid site visit team member login ID to get the corresponding user's site visits or passes (*) to get site visit details of all users.	Character data
Protocol Number	Required. Passes a valid protocol number to get a user's site visits in the given protocol or passes (*) to get site visits of a user in all protocols.	Character data
PageSize	Required. Number of protocol sites the user wants to view in a single page. The number must be greater than zero.	Number

Table 1229.Request Message Description: query

Node	Description	Type
StartRowNum	Optional. First record you want to start with.	Number
Sort Spec	<p>Used to sort the clinical protocol site records based on the given sort specifications. The Clinical Research Associate can query and prioritize site visits based on fields such as status, Site ID and so on. Other fields include:</p> <ul style="list-style-type: none"> ■ Account Main Phone Number ■ Account Status ■ Address Id ■ Primary Investigator Id ■ Protocol Id ■ Protocol Number ■ Protocol Site Id ■ Protocol Title ■ Region ■ Region Id ■ Site Id ■ Site Number ■ Status ■ Investigator First Name ■ Investigator Last Name 	Comma-separated list of Clinical Protocol Site for Mobile Integration business component fields made available in the integration.

Response Message Description: query

For a description of this request message, see [Table 1230](#)

Table 1230. Response Message Description: query

Parent Node	Field	Type	Description	
ClinicalProtocolSite	ProtocolNumber	Character data	Display protocol and site details.	
ClinicalProtocolSite	ProtocolId	Character data		
ClinicalProtocolSite	ProtocolSiteId	Character data		
ClinicalProtocolSite	ProtocolTitle	Character data		
ClinicalProtocolSite	Region	Character data		
ClinicalProtocolSite	RegionId	Character data		
ClinicalProtocolSite	SiteId	Character data		
ClinicalProtocolSite	AccountMainPhone Number	Character data		
ClinicalProtocolSite	Account	Character data		
ClinicalProtocolSite	SiteNumber	Character data		
ClinicalProtocolSite	PrimaryInvestigator Id	Character data		
ClinicalProtocolSite	AddressId	Character data		
ClinicalProtocolSite	Planned	Integer		
ClinicalProtocolSite	AccountStatus	Character data		
ClinicalProtocolSite	Status	Character data		
ClinicalProtocolSite	AccountType	Character data		
ClinicalProtocolSite	UserId	Character data		
ClinicalProtocolSiteAddressBc	Fax	Character data		Display details of addresses associated with the site.
ClinicalProtocolSiteAddressBc	City	Character data		
ClinicalProtocolSiteAddressBc	AddressLine2	Character data		
ClinicalProtocolSiteAddressBc	Phone	Character data		
ClinicalProtocolSiteAddressBc	State	Character data		
ClinicalProtocolSiteAddressBc	Country	Character data		
ClinicalProtocolSiteAddressBc	Zip	Character data		

Table 1230. Response Message Description: query

Parent Node	Field	Type	Description
ClinicalAccountInvestigatorRole	FirstName	Character data	Display site contact details.
ClinicalAccountInvestigatorRole	FaxPhone	Character data	
ClinicalAccountInvestigatorRole	EmailAddress	Character data	
ClinicalAccountInvestigatorRole	WorkPhone	Character data	
ClinicalAccountInvestigatorRole	State	Character data	
ClinicalAccountInvestigatorRole	LastName	Character data	
ClinicalTripReport	Done	Date and Time	Display site visit details.
ClinicalTripReport	Description	Character data	
ClinicalTripReport	Comment	Character data	
ClinicalTripReport	Id	Character data	
ClinicalTripReport	InvestigatorFirst Name	Character data	
ClinicalTripReport	InvestigatorLast Name	Character data	
ClinicalTripReport	Planned2	Date and Time	
ClinicalTripReport	Status	Character data	
ClinicalTripReport	Type	Character data	
ClinicalTripReport	TripReportStatus	Character data	
LsClinicalSiteVisitEmployee	Login	Character data	
LsClinicalSiteVisitEmployee	Emp Id	Character data	
LsClinicalSiteVisitEmployee	IsPrimaryOwner	Character data	
query	LastPage	Character data	Displays True if the page is last, otherwise it will display False.

SWILSClinicalQueryProtocolSite_ SiteVisits Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Workflow)

For a description of the service objects for this Web service, see [Table 1231](#).

Table 1231.SWILSClinicalQueryProtocolSite_SiteVisits Service Object

Name	Boundary Object Type	Class
SWI LS Clinical Query Protocol Site_Site Visits	Workflow	Not applicable.

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1232](#).

Table 1232.SWILSClinicalQueryProtocolSite_SiteVisits Data Object

Siebel Repository Name	External Name
LS Clinical Protocol Site_Site Visits Input IO	Clinical Protocol Site for Mobile Integration
LS Clinical Protocol Site_Site Visits Output IO	Clinical Protocol Site for Mobile Integration

Example Package for SWILSClinicalQueryProtocolSite_SiteVisits

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
...\SWILSClinicalQueryProtocolSite_Sitevisits\SWILSClinicalQueryProtocolSite_Site Visits_request.xml
```

Response

See the following file to view the sample code:

```
...\SWILSClinicalQueryProtocolSite_Sitevisits\SWILSClinicalQueryProtocolSite_Site Visits_response.xml
```

Interface Description (WSDL) for SWILSClinicalQueryProtocolSite_SiteVisits

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
...\SWILSClinicalQueryProtocolSite_Sitevisits\SWILSClinicalQueryProtocolSite_Site Visits.wsdl
```

SWI LS Clinical Payments Inbound

Use this Web service to update the incoming status, and to check the details of a payment for a site. An external application invokes this Web service with payment number, status, currency code, and check date. If the Payment Number or Status fields are null, then no updates are made to the Siebel Life Sciences application. If the currency code is null in the Web service, then the currency code presented in Siebel Life Sciences will be used. An error message is returned in the event of an error.

SWI LS Clinical Payments Inbound Operations

For a list of operations associated with this Web service, see [Table 1233](#).

Table 1233.SWI LS Clinical Payments Inbound Operations

Name	Description
UpdateClinicalPayment	Updates the payment status, and checks the details of a payment for a particular site.

Request Message Description: UpdateClinicalPayment

For a description of this request message, see [Table 1234](#).

NOTE: An external application can pass values for other nodes, apart from those listed in [Table 1234](#). Values in [Table 1234](#) are updated in the Siebel Life Sciences application.

Table 1234.Request Message Description: UpdateClinicalPayment

Node	Description	Type
Payment Number	Required.	Character data
Status	Required. Status of the payment.	Character data
AmountCurrencyCode	Optional.	Character data
CheckDate	Optional.	Date
CheckNumber	Optional.	Character data
PaymentFeedback	Optional. Customer feedback or comments.	Character data
VATAmount	Optional. Value added tax amount.	Currency

Response Message Description: UpdateClinicalPayment

There is no response message for the UpdateClinicalPayment operation.

SWI LS Clinical Payments Inbound Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Workflow)

For a description of the service objects for this Web service, see [Table 1235](#).

Table 1235.SWI LS Clinical Payments Inbound Service Object

Name	Boundary Object Type	Class
SWI LS Clinical Payments Inbound	Workflow	Not applicable.

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1236](#).

Table 1236.SWI LS Clinical Payments Inbound Data Object

Siebel Repository Name	External Name
LS Clinical Payments	Clinical Payments

Example Package for SWI LS Clinical Payments

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
...\LSClinicalPayments\UpdateClinicalPayment_request.xml
```

Interface Description (WSDL) for SWI LS Clinical Payments

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
...\LSClinicalPayments\SWI_LS_Clinical_Payments_Inbound.wsdl
```

SWILSClinicalTripReportInterface Service

Use this Web service to send trip report details to external applications and also to update the trip report details into your clinical trial management system. The user who invokes this Web service must be present in the site visit team. Also, consider the following:

- If no input is provided for any tags in the TripReportQueryByExample operation, shown in [Table 1237 on page 610](#), then the Web service will return all those site visit details where the user is part of site visit teams. If the number of records are larger than the predefined maximum size, then the Web service returns an error prompting the user to refine the search and limit the result set.
- An external application can invoke this Web service with any of the listed operations depending on the scenario.
- This Web service returns an error message if the Page Size field is left blank on the TripReportQueryPage operation.
- Only provided tags can be used with TripReportQueryPage operation.
- Mobile application users might need to update trip information offline. In this case, trip reports can be accessed from the clinical trial management system using query operations. The information can then be updated on the mobile device and then sent back to the clinical trial management system to complete the update.

SWILSClinicalTripReportInterfaceService Operations

For a list of operations associated with this Web service, see [Table 1237](#).

Table 1237. SWILSClinicalTripReportInterfaceService Operations

Operation Name	Description
TripReportQueryById	Used to query the trip report details based on give trip report Id or Site Visit Row Id.
TripReportQueryPage	Used to query the trip report details in pages based on given filter criteria.
TripReportQueryByExample	Used to query the trip report details based on given filter criteria.
TripReportSynchronize	Used to synchronize the trip report and its child records.
TripReportUpdate	Used to update the trip report header details.
TripReportInsertOrUpdate	Used either to update the trip report and its child components or to insert new child items of trip report.

Request Message Description: TripReportQueryById

For a description of this request message, see [Table 1238](#).

Table 1238. Request Message Description: TripReportQueryById

Node	Description	Type
PrimaryRowId	Required. The site visit row ID.	Character data

Request Message Description: TripReportQueryPage

For a description of this request message, see [Table 1239](#).

Table 1239. Request Message Description: TripReportQueryPage

Node	Description	Type
ClinicalTripReport.Id	Required. The site visit row ID. Can be either an asterisk (*), or a valid row ID.	Character data
ClinicalTripReport. ActivityUID	Required. Site visit activity ID. Can be either an asterisk (*), or a valid activity ID.	Character data
ClinicalTripReport. Description	Required. The trip report description. Can be either an asterisk (*), or a valid description.	Character data
ClinicalTripReport. DisplayInvestigatorFirstName	Required. Can be either an asterisk (*), or valid First Name.	Character data
ClinicalTripReport. DisplayInvestigatorLastName	Required. The last name of the principal investigator. Can be either an asterisk (*), or a valid last name.	Character data
ClinicalTripReport. ProtocolNumber	Required. The protocol number. Can be either an asterisk (*), or a valid protocol number.	Character data
ClinicalTripReport. ProtocolSiteId	Required. The site row ID. Can be either an asterisk (*), or a valid protocol site ID.	Character data
ClinicalTripReport. ProtocolTitle	Required. The protocol title. Can be either an asterisk (*), or a valid protocol title.	Character data
ClinicalTripReport. SiteName	Required. The trip report account. Can be either an asterisk (*), or a valid site name.	Character data
ClinicalTripReport. SiteNumber	Required. The site number. Can be either an asterisk (*), or a valid site number.	Character data
ClinicalTripReport. Status	Required. The trip report status. Can be either an asterisk (*), or a valid status value.	Character data
ClinicalTripReport. TripReportStatus	Required. The trip report status. Can be either an asterisk (*), or a valid trip report status.	Character data

Table 1239. Request Message Description: TripReportQueryPage

Node	Description	Type
ClinicalTripReport.Type	Required. The visit type. Can be either an asterisk (*), or a valid visit type value.	Character data
LsClinicalSiteVisitAssignee.Id	Required. The row ID of the employee in the site visit team. Can be either an asterisk (*), or valid row ID.	Character data
LsClinicalSiteVisitAssignee. ActivityId	Required. The activity ID of the employee in the site visit team. Can be either an asterisk (*), or a valid activity ID.	Character data
LsClinicalSiteVisitAssignee. EmpId	Required. The employee ID. Can be either an asterisk (*), or a valid employee ID.	Character data
LsClinicalSiteVisitAssignee. FirstName	Required. The employee's first name. Can be either an asterisk (*), or a valid first name.	Character data
LsClinicalSiteVisitAssignee. LastName	Required. The employee's last name. Can be either an asterisk (*), or a valid last name.	Character data
LsClinicalSiteVisitAssignee. UserId	Required. The user ID. Can be either an asterisk (*), or a valid user ID.	Character data
ClinicalAttendee.Id	Required. The attendee row ID. Can be either an asterisk (*), or a valid attendee row ID.	Character data
ClinicalAttendee. EmployeeFlag	Required. The employee flag. Can be either an asterisk (*), or the employee flag.	Boolean
ClinicalAttendee. FirstName	Required. The attendee's first name. Can be either an asterisk (*), or a valid first name.	Character data
ClinicalAttendee. LastName	Required. The attendee's last name. Can be either an asterisk (*), or a valid last name.	Character data
ClinicalAttendeeStatic.Id	Required. The attendee row ID. Can be either an asterisk (*), or a valid row ID.	Character data

Table 1239. Request Message Description: TripReportQueryPage

Node	Description	Type
ClinicalAttendeeStatic. ActivityId	Required. The attendee's activity ID. Can be either an asterisk (*), or a valid activity ID.	Character data
ClinicalAttendeeStatic. ContactId	Required. The contact ID. Can be either an asterisk (*), or a valid contact ID.	Character data
ClinicalChecklist.Id	Required. The checklist row ID. Can be either an asterisk (*), or valid checklist row ID.	Character data
ClinicalChecklist.ActivityUID	Required. The checklist activity ID. Can be either an asterisk (*), or a valid activity ID.	Character data
ClinicalChecklist. CreatedByName	Required. The created user name. Can be either an asterisk (*), or a valid created user name.	Character data
ClinicalChecklist. ParentActivityId	Required. The parent activity ID. Can be either an asterisk (*), or a valid parent activity ID.	Character data
ClinicalFollowUp.Id	Required. The clinical followup row ID. Can be either an asterisk (*), or a valid followup row ID.	Character data
ClinicalFollowUp. ActivityUID	Required. The activity ID. Can be either an asterisk (*), or a valid activity ID.	Character data
ClinicalFollowUp. CreatedByName	Required. The created user name. Can be either an asterisk (*), or a valid created user name.	Character data
ClinicalFollowUp. ParentActivityId	Required. The parent activity ID. Can be either an asterisk (*), or a valid parent activity ID.	Character data
ClinicalFollowUpSiteLevel.Id	Required. The followup site level row ID. Can be either an asterisk (*), or a valid followup site level row ID.	Character data
ClinicalFollowUpSiteLevel. ActivityUID	Required. The activity ID. Can be either an asterisk (*), or a valid activity ID.	Character data

Table 1239. Request Message Description: TripReportQueryPage

Node	Description	Type
ClinicalFollowUpSiteLevel.CreatedByName	Required. The created user name. Can be either an asterisk (*), or a valid created user name.	Character data
ClinicalFollowUpSiteLevel.ParentActivityId	Required. The parent activity ID. Can be either an asterisk (*), or a valid parent activity ID.	Character data
LsCaseReportFormsTracking.Id	Required. The case report form row ID. Can be either an asterisk (*), or a valid case report form row ID.	Character data
LsCaseReportFormsTracking.ActivityUID	Required. The activity ID. Can be either an asterisk (*), or a valid activity ID.	Character data
LsCaseReportFormsTracking.ParentActivityId	Required. Can be either an asterisk (*), or valid Parent Activity Id. Parent Activity Id	Character data
LsCaseReportFormsTracking.ParentTemplateVersion	Required. The template version. Can be either an asterisk (*), or a valid parent template version.	Character data
LsCaseReportFormsTracking.SubjectInitial	Required. The subject initial. Can be either an asterisk (*), or a valid subject initial.	Character data
LsCaseReportFormsTracking.SubjectNumber	Required. The subject number. Can be either an asterisk (*), or a valid subject number.	Character data
LsCaseReportFormsTracking.Visit	Required. The visit name. Can be either an asterisk (*), or a valid visit name.	Character data
LsCaseReportFormsTracking.VisitType	Required. The visit type. Can be either an asterisk (*), or a valid visit type.	Character data

Request Message Description: TripReportQueryByExample

For a description of this request message, see [Table 1240](#).

Table 1240. Request Message Description: TripReportQueryByExample

Node	Description	Type
ClinicalTripReport.Id	Optional. The site visit row ID.	Character data
ClinicalTripReport. Searchspec	Optional. The search specification.	Character data
ClinicalTripReport. ActivityUID	Optional. The site visit activity ID.	Character data
ClinicalTripReport. ApproverLogin	Optional. The approver login.	Character data
ClinicalTripReport. Comment	Optional. Comments.	Character data
ClinicalTripReport. Completed	Optional. The completed flag.	Boolean
ClinicalTripReport. Description	Optional. The trip report description.	Character data
ClinicalTripReport. DisplayInvestigatorFirstName	Optional. The PI first name.	Character data
ClinicalTripReport. DisplayInvestigatorLastName	Optional. The PI last name.	Character data
ClinicalTripReport. Done	Optional. The completed date.	UTC Date Time
ClinicalTripReport. Planned	Optional. The planned date.	UTC Date Time
ClinicalTripReport. ProtocolNumber	Optional. The protocol number.	Character data
ClinicalTripReport. ProtocolSiteId	Optional. The site row ID.	Character data
ClinicalTripReport. ProtocolTitle	Optional. The protocol title.	Character data
ClinicalTripReport. ReviewerComments	Optional. Reviewer comments.	Character data
ClinicalTripReport. ReviewerLogin	Optional. The reviewer login ID.	Character data
ClinicalTripReport. ApproverComments	Optional. Approver comments.	Character data
ClinicalTripReport. SiteName	Optional. Trip report account.	Character data

Table 1240. Request Message Description: TripReportQueryByExample

Node	Description	Type
ClinicalTripReport. SiteNumber	Optional. Site number.	Character data
ClinicalTripReport. Status	Optional. Status.	Character data
ClinicalTripReport. TemplateName	Optional. Template name.	Character data
ClinicalTripReport. TripReportCompleted	Optional. Trip report completed date.	Date
ClinicalTripReport. TripReportStatus	Optional. Trip report status.	Character data
ClinicalTripReport.Type	Optional. Visit type.	Character data
LsClinicalSiteVisitAssignee.Id	Optional. Row ID of the employee in the site visit team.	Character data
LsClinicalSiteVisitAssignee.Searchspec	Optional. The search specification.	Character data
LsClinicalSiteVisitAssignee. ActivityId	Optional. The activity ID of the employee in the site visit team.	Character data
LsClinicalSiteVisitAssignee. ConfigurationName	Optional. The configuration name.	Character data
LsClinicalSiteVisitAssignee. EMailAddr	Optional. Email address.	Character data
LsClinicalSiteVisitAssignee. EmpId	Optional. Employee ID.	Character data
LsClinicalSiteVisitAssignee. FirstName	Optional. The employee's first name.	Character data
LsClinicalSiteVisitAssignee. IsPrimaryOwner	Optional. Is Primary Owner flag.	Character data
LsClinicalSiteVisitAssignee. JobTitle	Optional. Job title.	Character data
LsClinicalSiteVisitAssignee. LastName	Optional. The employee's last name.	Character data
LsClinicalSiteVisitAssignee. Phone	Optional. Phone number.	Character data
LsClinicalSiteVisitAssignee. ShiftName	Optional. The shift name.	Character data
LsClinicalSiteVisitAssignee. UserId	Optional. The User ID.	Character data
ClinicalAttendee.Id	Optional. The Attendee's Row ID.	Character data
ClinicalAttendee. Searchspec	Optional. The search specification.	Character data

Table 1240. Request Message Description: TripReportQueryByExample

Node	Description	Type
ClinicalAttendee. DisplayRole	Optional. The display role.	Character data
ClinicalAttendee. EmployeeFlag	Optional. The employee flag.	Boolean
ClinicalAttendee. FirstName	Optional. First name.	Character data
ClinicalAttendee. LastName	Optional. Last name.	Character data
ClinicalAttendee. Position	Optional. Position	Character data
ClinicalAttendeeStatic.Id	Optional. Attendee's row ID.	Character data
ClinicalAttendeeStatic. ActivityId	Optional. Attendee's activity ID.	Character data
ClinicalAttendeeStatic. ContactId	Optional. Contact ID.	Character data
ClinicalChecklist.Id	Optional. Checklist row ID.	Character data
ClinicalChecklist. Searchspec	Optional. Search specification.	Character data
ClinicalChecklist.ActivityUID	Optional. Checklist activity ID.	Character data
ClinicalChecklist. Category	Optional. Category	Character data
ClinicalChecklist. CreatedByName	Optional. Created user name.	Character data
ClinicalChecklist. Description	Optional. Description.	Character data
ClinicalChecklist. Display	Optional. Display for calendar activities.	Character data
ClinicalChecklist. ParentActivityId	Optional. Parent activity ID.	Character data
ClinicalChecklist. ShortComment	Optional. Comments.	Character data
ClinicalChecklist. Status	Optional. Status.	Character data
ClinicalChecklist. Type	Optional. Type.	Character data
ClinicalFollowUp.Id	Optional. Row ID of the clinical followup record.	Character data
ClinicalFollowUp. ActivityUID	Optional. Activity ID.	Character data
ClinicalFollowUp. CreatedByName	Optional. Created user name.	Character data
ClinicalFollowUp. Description	Optional. Description.	Character data

Table 1240. Request Message Description: TripReportQueryByExample

Node	Description	Type
ClinicalFollowUp. Display	Optional. Display.	Character data
ClinicalFollowUp. Done	Optional. Completed date.	UTC Date Time
ClinicalFollowUp. Due	Optional. Due date.	UTC Date Time
ClinicalFollowUp. ParentActivityId	Optional. Parent activity ID.	Character data
ClinicalFollowUp. ShortComment	Optional. Comments.	Character data
ClinicalFollowUp. Status	Optional. Status.	Character data
ClinicalFollowUp. Type	Optional. Activity type.	Character data
ClinicalFollowUpSiteLevel.Id	Optional. Row ID of the followup site level record.	Character data
ClinicalFollowUpSiteLevel. ActivityUID	Optional. Activity ID.	Character data
ClinicalFollowUpSiteLevel. Category	Optional. Category.	Character data
ClinicalFollowUpSiteLevel. CreatedByName	Optional. Created user name.	Character data
ClinicalFollowUpSiteLevel. Description	Optional. Description.	Character data
ClinicalFollowUpSiteLevel. Display	Optional. Display.	Character data
ClinicalFollowUpSiteLevel. Done	Optional. Completed date.	UTC Date Time
ClinicalFollowUpSiteLevel. Due	Optional. Due date.	UTC Date Time
ClinicalFollowUpSiteLevel. ParentActivityId	Optional. Parent activity ID.	Character data
ClinicalFollowUpSiteLevel. ShortComment	Optional. Comments.	Character data
ClinicalFollowUpSiteLevel. Status	Optional. Status.	Character data
ClinicalFollowUpSiteLevel. Type	Optional. Type.	Character data
LsCaseReportFormsTracking.Id	Optional. Row ID of the case report form.	Character data
LsCaseReportFormsTracking. CRFPages	Optional. Number of case report form pages.	Integer
LsCaseReportFormsTracking. ActivityType	Optional. Activity type.	Character data
LsCaseReportFormsTracking. ActivityUID	Optional. Activity Id	Character data
LsCaseReportFormsTracking. Category	Optional. Category.	Character data
LsCaseReportFormsTracking. Comments	Optional. Comments.	Character data

Table 1240. Request Message Description: TripReportQueryByExample

Node	Description	Type
LsCaseReportFormsTracking. OwnedById	Optional. Owner user ID.	Character data
LsCaseReportFormsTracking. ParentActivityId	Optional. Parent activity ID.	Character data
LsCaseReportFormsTracking. ParentTemplateVersion	Optional. Template version.	Character data
LsCaseReportFormsTracking. PrivateFlag	Optional. Private flag.	Boolean
LsCaseReportFormsTracking. Retrieved	Optional. Retrieved flag.	Boolean
LsCaseReportFormsTracking. RetrievedDate	Optional. Retrieved date.	UTC Date Time
LsCaseReportFormsTracking. SourceDocumentVerified	Optional. Source Document Verified flag.	Boolean
LsCaseReportFormsTracking. SourceDocumentVerifiedDate	Optional. Source Document Verified date.	UTC Date Time
LsCaseReportFormsTracking. SubjectInitial	Optional. Subject initial.	Character data
LsCaseReportFormsTracking. SubjectNumber	Optional. Subject number.	Character data
LsCaseReportFormsTracking. Visit	Optional. Visit name.	Character data
LsCaseReportFormsTracking. VisitType	Optional. Visit type.	Character data

Request Message Description: TripReportInsertOrUpdate

For a description of this request message, see [Table 1241](#).

Table 1241. Request Message Description: TripReportInsertOrUpdate

Node	Description	Type
ClinicalTripReport.Id	Required. Site visit row ID.	Character data
ClinicalTripReport. ActivityUID	Optional. Site visit activity ID.	Character data
ClinicalTripReport. ApproverLogin	Optional. Approver login.	Character data
ClinicalTripReport. Comment	Optional. Comments.	Character data
ClinicalTripReport. Completed	Optional. Completed flag.	Boolean

Table 1241. Request Message Description: TripReportInsertOrUpdate

Node	Description	Type
ClinicalTripReport. Description	Required. Trip Report Description	Character data
ClinicalTripReport. DisplayInvestigatorFirstName	Optional. The first name of the principal investigator.	Character data
ClinicalTripReport. DisplayInvestigatorLastName	Optional. PI last name.	Character data
ClinicalTripReport. Done	Optional. Completed date.	UTC Date Time
ClinicalTripReport. Planned	Optional. Planned date.	UTC Date Time
ClinicalTripReport. ProtocolSiteId	Required. Site row ID.	Character data
ClinicalTripReport. ReviewerComments	Optional. Reviewer comments.	Character data
ClinicalTripReport. ReviewerLogin	Optional. Reviewer login ID.	Character data
ClinicalTripReport. ApproverComments	Optional. Approver comments.	Character data
ClinicalTripReport. SiteNumber	Optional. Site number.	Character data
ClinicalTripReport. Status	Required. Status.	Character data
ClinicalTripReport. TemplateName	Optional. Template name.	Character data
ClinicalTripReport. TripReportCompleted	Optional. Trip report completed date.	Date
ClinicalTripReport. TripReportStatus	Optional. Trip report status.	Character data
ClinicalTripReport. Type	Required. Visit type.	Character data
LsClinicalSiteVisitAssignee. Id	Optional. Row ID of the employee in the site visit team.	Character data

Table 1241.Request Message Description: TripReportInsertOrUpdate

Node	Description	Type
LsClinicalSiteVisitAssignee. ActivityId	Required. Activity ID of the employee in the site visit team.	Character data
LsClinicalSiteVisitAssignee. ConfigurationName	Optional. Configuration name.	Character data
LsClinicalSiteVisitAssignee. EMailAddr	Optional. Email address.	Character data
LsClinicalSiteVisitAssignee. EmpId	Required. Employee ID.	Character data
LsClinicalSiteVisitAssignee. FirstName	Optional. Employee first name.	Character data
LsClinicalSiteVisitAssignee. IsPrimaryOwner	Optional. The Is Primary Owner flag.	Character data
LsClinicalSiteVisitAssignee. JobTitle	Optional. Job title.	Character data
LsClinicalSiteVisitAssignee. LastName	Optional. Employee last name.	Character data
LsClinicalSiteVisitAssignee. Phone	Optional. Phone number.	Character data
LsClinicalSiteVisitAssignee. ShiftName	Optional. Shift name.	Character data
LsClinicalSiteVisitAssignee. UserId	Optional. User ID.	Character data
ClinicalAttendeeStatic. Id	Optional. Row ID of the attendee.	Character data
ClinicalAttendeeStatic. ActivityId	Required. Activity ID of the attendee.	Character data
ClinicalAttendeeStatic. ContactId	Required. Contact ID.	Character data
ClinicalChecklist. Id	Required. Checklist row ID.	Character data
ClinicalChecklist. ActivityUID	Required. Checklist activity ID.	Character data
ClinicalChecklist. Category	Required. Category.	Character data
ClinicalChecklist. CreatedByName	Optional. Created user name	Character data

Table 1241. Request Message Description: TripReportInsertOrUpdate

Node	Description	Type
ClinicalChecklist. Description	Optional. Description.	Character data
ClinicalChecklist. Display	Optional. Display.	Character data
ClinicalChecklist. ParentActivityId	Required. Parent activity ID.	Character data
ClinicalChecklist. ShortComment	Optional. Comments.	Character data
ClinicalChecklist. Status	Optional. Status.	Character data
ClinicalChecklist. Type	Optional. Type.	Character data
LsClinicalChecklistAssignee. Id	Optional. Checklist assignee Row ID.	Character data
LsClinicalChecklistAssignee. ActivityId	Required. Activity ID.	Character data
LsClinicalChecklistAssignee. ConfigurationName	Optional. Configuration name.	Character data
LsClinicalChecklistAssignee. EMailAddr	Optional. Email address.	Character data
LsClinicalChecklistAssignee. FirstName	Optional. First name.	Character data
LsClinicalChecklistAssignee. IsPrimaryOwner	Optional. Primary Owner flag.	Character data
LsClinicalChecklistAssignee. JobTitle	Optional. Job title.	Character data
LsClinicalChecklistAssignee. LastName	Optional. Last name.	Character data
LsClinicalChecklistAssignee. Phone	Optional. Phone.	Character data
LsClinicalChecklistAssignee. UserId	Optional. User ID.	Character data
LsClinicalChecklistAssignee. ShiftName	Optional. Shift name.	Character data
LsClinicalChecklistAssignee. EmpId	Required. Employee ID.	Character data
ClinicalFollowUp. Id	Required. Clinical followup Row ID.	Character data
ClinicalFollowUp. ActivityUID	Required. Activity ID.	Character data
ClinicalFollowUp. Category	Required.	Character data

Table 1241. Request Message Description: TripReportInsertOrUpdate

Node	Description	Type
ClinicalFollowUp. CreatedByName	Optional. Created user name.	Character data
ClinicalFollowUp. Description	Optional. Description.	Character data
ClinicalFollowUp. Display	Optional. Display.	Character data
ClinicalFollowUp. Done	Optional. Completed date.	UTC Date Time
ClinicalFollowUp. Due	Optional. Due Date	UTC Date Time
ClinicalFollowUp. ParentActivityId	Required. Parent activity ID.	Character data
ClinicalFollowUp. ShortComment	Optional. Comments.	Character data
ClinicalFollowUp. Status	Optional. Status.	Character data
ClinicalFollowUp. Type	Optional. Activity type.	Character data
LsClinicalFollowUpAssignee. Id	Optional. Followup item assignee row ID.	Character data
LsClinicalFollowUpAssignee. ActivityId	Required. Activity ID.	Character data
LsClinicalFollowUpAssignee. ConfigurationName	Optional. Configuration name.	Character data
LsClinicalFollowUpAssignee. EMailAddr	Optional. Email address.	Character data
LsClinicalFollowUpAssignee. EmpId	Required. Employee ID.	Character data
LsClinicalFollowUpAssignee. FirstName	Optional. First name.	Character data
LsClinicalFollowUpAssignee. IsPrimaryOwner	Optional. Primary Owner flag.	Character data
LsClinicalFollowUpAssignee. JobTitle	Optional. Job title.	Character data
LsClinicalFollowUpAssignee. LastName	Optional. Last name.	Character data
LsClinicalFollowUpAssignee. Phone	Optional. Phone.	Character data

Table 1241. Request Message Description: TripReportInsertOrUpdate

Node	Description	Type
LsClinicalFollowUpAssignee. ShiftName	Optional. Shift name.	Character data
LsClinicalFollowUpAssignee. UserId	Optional. User ID.	Character data
LsCaseReportFormsTracking. Id	Required. Case report form row ID.	Character data
LsCaseReportFormsTracking. CRFPages	Optional. The number of case report form pages.	Integer
LsCaseReportFormsTracking. ActivityType	Optional. Activity type.	Character data
LsCaseReportFormsTracking. ActivityUID	Required. Activity ID.	Character data
LsCaseReportFormsTracking. Category	Required. Category.	Character data
LsCaseReportFormsTracking. Comments	Optional. Comments.	Character data
LsCaseReportFormsTracking. OwnedById	Optional. Owner User ID.	Character data
LsCaseReportFormsTracking. ParentActivityId	Required. Parent activity ID.	Character data
LsCaseReportFormsTracking. ParentTemplateVersion	Required. Template version.	Character data
LsCaseReportFormsTracking. PrivateFlag	Optional. The Private flag.	Boolean
LsCaseReportFormsTracking. Retrieved	Optional. Retrieved flag.	Boolean
LsCaseReportFormsTracking. RetrievedDate	Optional. Retrieved date.	UTC Date Time
LsCaseReportFormsTracking. SourceDocumentVerified	Optional. The Source Document Verified flag.	Boolean
LsCaseReportFormsTracking. SourceDocumentVerifiedDate	Optional. Source document verified date.	UTC Date Time
LsCaseReportFormsTracking. SubjectInitial	Required. Subject initial.	Character data
LsCaseReportFormsTracking. SubjectNumber	Required. Subject number.	Character data

Table 1241. Request Message Description: TripReportInsertOrUpdate

Node	Description	Type
LsCaseReportFormsTracking. Visit	Required. Visit name.	Character data
LsCaseReportFormsTracking. VisitType	Required. Visit type.	Character data
LsClinicalGeoLocation. Id	Required. Geo location row ID.	Character data
LsClinicalGeoLocation. Comments	Optional. Comments.	Character data
LsClinicalGeoLocation. EmpId	Required. Employee ID.	Character data
LsClinicalGeoLocation. Latitude	Optional. Latitude.	Number
LsClinicalGeoLocation. LoginId	Optional. Login ID.	Character data
LsClinicalGeoLocation. Longitude	Optional. Longitude.	Number
LsClinicalGeoLocation. SiteVisitId	Required. Site visit row ID.	Character data
LsClinicalGeoLocation VisitDate	Required. Visit date.	Date Time

Request Message Description: TripReportUpdate

For a description of this request message, see [Table 1242](#).

Table 1242. Request Message Description: TripReportUpdate

Node	Description	Type
ClinicalTripReport.Id	Required. Site visit row ID.	Character data
ClinicalTripReport. ActivityUID	Optional. Site visit activity ID.	Character data
ClinicalTripReport. ApproverLogin	Optional. Approver login.	Character data
ClinicalTripReport. Comment	Optional. Comments.	Character data
ClinicalTripReport. Completed	Optional. The Completed flag.	Boolean
ClinicalTripReport. Description	Required. Trip report description.	Character data
ClinicalTripReport. DisplayInvestigatorFirstName	Optional. PI first name.	Character data

Table 1242.Request Message Description: TripReportUpdate

Node	Description	Type
ClinicalTripReport. DisplayInvestigatorLastName	Optional. PI last name.	Character data
ClinicalTripReport. Done	Optional. Completed date.	UTC Date Time
ClinicalTripReport. Planned	Optional. Planned date.	UTC Date Time
ClinicalTripReport. ProtocolSiteId	Required. Site row ID.	Character data
ClinicalTripReport. ReviewerComments	Optional. Reviewer comments.	Character data
ClinicalTripReport. ReviewerLogin	Optional. Review login ID.	Character data
ClinicalTripReport. ApproverComments	Optional. Approver comments.	Character data
ClinicalTripReport. SiteNumber	Optional. Site number.	Character data
ClinicalTripReport. Status	Required. Status.	Character data
ClinicalTripReport. TemplateName	Optional. Template name.	Character data
ClinicalTripReport. TripReportCompleted	Optional. Trip report completed date.	Date
ClinicalTripReport. TripReportStatus	Optional. Trip report status.	Character data
ClinicalTripReport. Type	Required. Visit type.	Character data

Request Message Description: TripReportSynchronize

For a description of this request message, see [Table 1243](#).

Table 1243.Request Message Description: TripReportSynchronize

Node	Description	Type
ClinicalTripReport.Id	Required. Site visit row ID.	Character ata
ClinicalTripReport. ApproverLogin	Optional. Approver login.	Character data
ClinicalTripReport. Comment	Optional. Comments.	Character data
ClinicalTripReport. Completed	Optional. Completed flag.	Character data
ClinicalTripReport. Description	Required. Trip report description.	Character data

Table 1243.Request Message Description: TripReportSynchronize

Node	Description	Type
ClinicalTripReport. DisplayInvestigatorFirstName	Optional. First name of principal investigator.	Character data
ClinicalTripReport. DisplayInvestigatorLastName	Optional. Last name of the principal investigator.	Character data
ClinicalTripReport. Done	Optional. Completed date.	UTC Date Time
ClinicalTripReport. Planned	Optional. Planned date.	UTC Date Time
ClinicalTripReport. ProtocolSiteId	Required. Site row ID.	Character data
ClinicalTripReport. ReviewerComments	Optional. Reviewer comments,	Character data
ClinicalTripReport. ReviewerLogin	Optional. Reviewer login ID.	Character data
ClinicalTripReport. ApproverComments	Optional. Approver comments.	Character data
ClinicalTripReport. SiteNumber	Optional. Site number.	Character data
ClinicalTripReport. Status	Required. Status.	Character data
ClinicalTripReport. TemplateName	Optional. Template name.	Character data
ClinicalTripReport. TripReportCompleted	Optional. Trip report completed date.	Date
ClinicalTripReport. TripReportStatus	Optional. Trip report status.	Character data
ClinicalTripReport. Type	Required. Visit type.	Character data
LsClinicalSiteVisitAssignee. Id	Optional. Row ID of the employee in the site visit team.	Character data
LsClinicalSiteVisitAssignee. ActivityId	Required. Activity ID of the employee in the site visit team.	Character data

Table 1243.Request Message Description: TripReportSynchronize

Node	Description	Type
LsClinicalSiteVisitAssignee. ConfigurationName	Optional. Configuration name.	Character data
LsClinicalSiteVisitAssignee. EMailAddr	Optional. Email address.	Character data
LsClinicalSiteVisitAssignee. EmpId	Required. Employee ID.	Character data
LsClinicalSiteVisitAssignee. FirstName	Optional. Employee first name.	Character data
LsClinicalSiteVisitAssignee. IsPrimaryOwner	Optional. Is Primary Owner flag.	Character data
LsClinicalSiteVisitAssignee. JobTitle	Optional. Job title.	Character data
LsClinicalSiteVisitAssignee. LastName	Optional. Employee last name.	Character data
LsClinicalSiteVisitAssignee. Phone	Optional. Phone number.	Character data
LsClinicalSiteVisitAssignee. ShiftName	Optional. Shift name.	Character data
LsClinicalSiteVisitAssignee. UserId	Optional. User ID.	Character data
ClinicalAttendeeStatic. Id	Optional. Attendees row ID.	Character data
ClinicalAttendeeStatic. ActivityId	Required. Attendee's Activity ID.	Character data
ClinicalAttendeeStatic. ContactId	Required. Contact ID.	Character data
ClinicalFollowUp. Id	Required. Clinical followup row ID.	Character data
ClinicalFollowUp. ActivityUID	Required. Activity ID.	Character data
ClinicalFollowUp. Category	Required. Category.	Character data
ClinicalFollowUp. CreatedByName	Optional. Created user name.	Character data
ClinicalFollowUp. Description	Optional. Description.	Character data
ClinicalFollowUp. Display	Optional. Display.	Character data

Table 1243.Request Message Description: TripReportSynchronize

Node	Description	Type
ClinicalFollowUp. Done	Optional. Completed date.	UTC date and time.
ClinicalFollowUp. Due	Optional. Due date.	UTC date and time.
ClinicalFollowUp. ParentActivityId	Required. Parent Activity ID.	Character data
ClinicalFollowUp. ShortComment	Optional. Comments.	Character data
ClinicalFollowUp. Status	Optional. Status.	Character data
ClinicalFollowUp. Type	Optional. Activity type.	Character data
LsClinicalFollowUpAssignee. Id	Required. Followup item assignee row ID.	Character data
LsClinicalFollowUpAssignee. ActivityId	Required. Activity ID.	Character data
LsClinicalFollowUpAssignee. ConfigurationName	Optional. Configuration name.	Character data
LsClinicalFollowUpAssignee. EMailAddr	Optional. Email address.	Character data
LsClinicalFollowUpAssignee. EmpId	Required. Employee ID.	Character data
LsClinicalFollowUpAssignee. FirstName	Optional. First name.	Character data
LsClinicalFollowUpAssignee. IsPrimaryOwner	Optional. Primary Owner flag.	Character data
LsClinicalFollowUpAssignee. JobTitle	Optional. Job title.	Character data
LsClinicalFollowUpAssignee. LastName	Optional. Last name.	Character data
LsClinicalFollowUpAssignee. Phone	Optional. Phone.	Character data
LsClinicalFollowUpAssignee. ShiftName	Optional. Shift name.	Character data
LsClinicalFollowUpAssignee. UserId	Optional. User ID.	Character data
LsCaseReportFormsTracking. Id	Required. Case report form row ID.	Character data

Table 1243.Request Message Description: TripReportSynchronize

Node	Description	Type
LsCaseReportFormsTracking. CRFPages	Optional. Number of Case report form pages.	Character data
LsCaseReportFormsTracking. ActivityType	Optional. Activity type.	Character data
LsCaseReportFormsTracking. ActivityUID	Required. Activity ID.	Character data
LsCaseReportFormsTracking. Category	Required. Category.	Character data
LsCaseReportFormsTracking. Comments	Optional. Comments.	Character data
LsCaseReportFormsTracking. OwnedById	Optional. Owner's user ID.	Character data
LsCaseReportFormsTracking. ParentActivityId	Required. Parent activity ID.	Character data
LsCaseReportFormsTracking. ParentTemplateVersion	Optional. Template version.	Character data
LsCaseReportFormsTracking. PrivateFlag	Optional. Private flag.	Character data
LsCaseReportFormsTracking. Retrieved	Optional. Retrieved flag.	Character data
LsCaseReportFormsTracking. RetrievedDate	Optional. Retrieved date.	UTC date and time
LsCaseReportFormsTracking. SourceDocumentVerified	Optional. Source Document Verified flag.	Character data
LsCaseReportFormsTracking. SourceDocumentVerifiedDate	Optional. Source document verified date.	UTC date and time.
LsCaseReportFormsTracking. SubjectInitial	Optional. Required subject initial.	Character data
LsCaseReportFormsTracking. SubjectNumber	Required. Subject number.	Character data
LsCaseReportFormsTracking. Visit	Required. Visit name.	Character data
LsCaseReportFormsTracking. VisitType	Required. Visit type.	Character data

Response Message Description: All SWILSClinicalTripReportInterfaceService Query Operations

For a description of these response messages, see [Table 1244](#).

Table 1244. Response Message Description: All SWILSClinicalTripReportInterfaceService Query Operations

Node	Description	Type
ClinicalTripReport. Id	Site visit row ID.	Character data
ClinicalTripReport. ActivityUID	Site visit activity ID.	Character data
ClinicalTripReport. ApproverLogin	Approver login.	Character data
ClinicalTripReport. Comment	Comments.	Character data
ClinicalTripReport. Completed	The Completed flag.	Boolean
ClinicalTripReport. Description	Trip report description.	Character data
ClinicalTripReport. DisplayInvestigatorFirstName	The first name of the principal investigator.	Character data
ClinicalTripReport. DisplayInvestigatorLastName	The last name of the principal investigator.	Character data
ClinicalTripReport. Done	Completed date.	UTC date time
ClinicalTripReport. Planned	Planned date.	UTC Date Time
ClinicalTripReport. ProtocolNumber	Protocol number.	Character data
ClinicalTripReport. ProtocolSiteId	Site row ID.	Character data
ClinicalTripReport. ProtocolTitle	Protocol title.	Character data
ClinicalTripReport. ReviewerComments	Reviewer comments.	Character data
ClinicalTripReport. ReviewerLogin	Reviewer login ID.	Character data
ClinicalTripReport. ApproverComments	Approver comments.	Character data
ClinicalTripReport. SiteName	Trip report account.	Character data
ClinicalTripReport. SiteNumber	Site number.	Character data
ClinicalTripReport. Status	Status.	Character data
ClinicalTripReport. TemplateName	Template name.	Character data
ClinicalTripReport. TripReportCompleted	Trip report completed date.	Date
ClinicalTripReport. TripReportStatus	Trip report status.	Character data
ClinicalTripReport. Type	Visit type.	Character data
LsClinicalSiteVisitAssignee. Id	Row ID of the employee in the site visit team.	Character data

Table 1244. Response Message Description: All SWILSClinicalTripReportInterfaceService Query Operations

Node	Description	Type
LsClinicalSiteVisitAssignee. ActivityId	Activity ID of the employee in the site visit team.	Character data
LsClinicalSiteVisitAssignee. ConfigurationName	Configuration name.	Character data
LsClinicalSiteVisitAssignee. EMailAddr	Email address.	Character data
LsClinicalSiteVisitAssignee. EmpId	Employee ID.	Character data
LsClinicalSiteVisitAssignee. FirstName	Employee first name.	Character data
LsClinicalSiteVisitAssignee. IsPrimaryOwner	Is Primary Owner flag.	Character data
LsClinicalSiteVisitAssignee. JobTitle	Job title.	Character data
LsClinicalSiteVisitAssignee. LastName	Employee last name.	Character data
LsClinicalSiteVisitAssignee. Phone	Phone number.	Character data
LsClinicalSiteVisitAssignee. ShiftName	Shift name.	Character data
LsClinicalSiteVisitAssignee. UserId	User ID.	Character data
LSClinicalSiteVisitAssignee_Position. Division	Division.	Character data
LSClinicalSiteVisitAssignee_Position. Name	Position name.	Character data
LSClinicalSiteVisitAssignee_Responsibility. Responsibility	Responsibility.	Character data
LSClinicalSiteVisitAssignee_Responsibility. PrimaryOrganization	Primary organization.	Character data
ListOfLSClinicalSiteVisitAssignee_Subcontractor. Subcontractor Name	Subcontractor name.	Character data
ClinicalAttendee. Id	Row ID of the attendee.	Character data
ClinicalAttendee. DisplayRole	Display role.	Character data
ClinicalAttendee. EmployeeFlag	Employee flag.	Boolean
ClinicalAttendee. FirstName	First name.	Character data
ClinicalAttendee. LastName	Last name.	Character data
ClinicalAttendee. Position	Position.	Character data
ClinicalAttendeeStatic. Id	Attendees row ID.	Character data
ClinicalAttendeeStatic. ActivityId	Attendee Activity ID.	Character data
ClinicalAttendeeStatic. ContactId	Contact ID	Character data
ClinicalChecklist. Id	Checklist row ID	Character data
ClinicalChecklist. ActivityUID	Checklist Activity ID.	Character data

Table 1244. Response Message Description: All SWILSClinicalTripReportInterfaceService Query Operations

Node	Description	Type
ClinicalChecklist. Category	Category.	Character data
ClinicalChecklist. CreatedByName	Created user name.	Character data
ClinicalChecklist. Description	Description.	Character data
ClinicalChecklist. Display	Display.	Character data
ClinicalChecklist. ParentActivityId	Parent activity ID.	Character data
ClinicalChecklist. ShortComment	Comments.	Character data
ClinicalChecklist. Status	Status.	Character data
ClinicalChecklist. Type	Type.	Character data
LsClinicalChecklistAssignee. Id	Checklist assignee row ID.	Character data
LsClinicalChecklistAssignee. ActivityId	Activity ID.	Character data
LsClinicalChecklistAssignee. ConfigurationName	Configuration name.	Character data
LsClinicalChecklistAssignee. EMailAddr	Email address.	Character data
LsClinicalChecklistAssignee. FirstName	First name.	Character data
LsClinicalChecklistAssignee. IsPrimaryOwner	Is Primary Owner flag.	Character data
LsClinicalChecklistAssignee. JobTitle	Job title.	Character data
LsClinicalChecklistAssignee. LastName	Last name.	Character data
LsClinicalChecklistAssignee. Phone	Phone number.	Character data
LsClinicalChecklistAssignee. UserId	User ID.	Character data
LsClinicalChecklistAssignee. ShiftName	Schedule name.	Character data
LsClinicalChecklistAssignee. EmpId	Employee ID.	Character data
ClinicalFollowUp. Id	Clinical followup row ID.	Character data
ClinicalFollowUp. ActivityUID	Activity ID.	Character data
ClinicalFollowUp. Category	Category.	Character data
ClinicalFollowUp. CreatedByName	Created user name.	Character data
ClinicalFollowUp. Description	Description.	Character data
ClinicalFollowUp. Display	Display.	Character data
ClinicalFollowUp. Done	Completed date.	UTC Date Time
ClinicalFollowUp. Due	Due date.	UTC Date Time
ClinicalFollowUp. ParentActivityId	Parent activity ID	Character data

Table 1244. Response Message Description: All SWILSClinicalTripReportInterfaceService Query Operations

Node	Description	Type
ClinicalFollowUp. ShortComment	Comments.	Character data
ClinicalFollowUp. Status	Status.	Character data
ClinicalFollowUp. Type	Activity type.	Character data
LsClinicalFollowUpAssignee. Id	Followup assignee row ID.	Character data
LsClinicalFollowUpAssignee. ActivityId	Activity ID.	Character data
LsClinicalFollowUpAssignee. ConfigurationName	Configuration name.	Character data
LsClinicalFollowUpAssignee. EmailAddr	Email address.	Character data
LsClinicalFollowUpAssignee. EmpId	Employee ID.	Character data
LsClinicalFollowUpAssignee. FirstName	First name.	Character data
LsClinicalFollowUpAssignee. IsPrimaryOwner	Is Primary Owner flag.	Character data
LsClinicalFollowUpAssignee. JobTitle	Job title.	Character data
LsClinicalFollowUpAssignee. LastName	Last name.	Character data
LsClinicalFollowUpAssignee. Phone	Phone number.	Character data
LsClinicalFollowUpAssignee. ShiftName	Schedule name.	Character data
LsClinicalFollowUpAssignee. UserId	User ID.	Character data
LSClinicalFollowUpAssignee_Position. Division	Position division.	Character data
LSClinicalFollowUpAssignee_Position. Name	Position.	Character data
LSClinicalFollowUpAssignee_Responsibility. Responsibility	Responsibility.	Character data
LSClinicalFollowUpAssignee_Subcontractor. SubcontractorName	Subcontractor name.	Character data
ClinicalFollowUpSiteLevel. Id	Followup site level row ID.	Character data
ClinicalFollowUpSiteLevel. ActivityUID	Activity ID.	Character data
ClinicalFollowUpSiteLevel. Category	Category.	
ClinicalFollowUpSiteLevel. CreatedByName	Created user name.	Character data
ClinicalFollowUpSiteLevel. Description	Description.	Character data
ClinicalFollowUpSiteLevel. Display	Display.	Character data
ClinicalFollowUpSiteLevel. Done	Completed date.	UTC Date Time
ClinicalFollowUpSiteLevel. Due	Due date.	UTC Date Time

Table 1244. Response Message Description: All SWILSClinicalTripReportInterfaceService Query Operations

Node	Description	Type
ClinicalFollowUpSiteLevel. ParentActivityId	Parent activity ID.	Character data
ClinicalFollowUpSiteLevel. ShortComment	Comments.	Character data
ClinicalFollowUpSiteLevel. Status	Status.	Character data
ClinicalFollowUpSiteLevel. Type	Type.	Character data
LsClinicalFollowUpSiteLevelAssignee. Id	Site level assignee row ID.	Character data
LsClinicalFollowUpSiteLevelAssignee. ActivityId	Activity ID.	Character data
LsClinicalFollowUpSiteLevelAssignee. ConfigurationName	Configuration name.	Character data
LsClinicalFollowUpSiteLevelAssignee. EMailAddr	Email address.	Character data
LsClinicalFollowUpSiteLevelAssignee. EmpId	Employee ID.	Character data
LsClinicalFollowUpSiteLevelAssignee. FirstName	First Name	Character data
LsClinicalFollowUpSiteLevelAssignee. IsPrimaryOwner	The Primary Owner flag.	Character data
LsClinicalFollowUpSiteLevelAssignee. JobTitle	Job title.	Character data
LsClinicalFollowUpSiteLevelAssignee. LastName	Last name.	Character data
LsClinicalFollowUpSiteLevelAssignee. Phone	Phone.	Character data
LsClinicalFollowUpSiteLevelAssignee. ShiftName	Shift name.	Character data
LsClinicalFollowUpSiteLevelAssignee. UserId	User ID.	Character data
LSClinicalFollowUpSiteLevelAssignee_Position. Division	Position division.	Character data
LSClinicalFollowUpSiteLevelAssignee_Position. Name	Position.	Character data
LSClinicalFollowUpSiteLevelAssignee_Responsibility. Responsibility	Responsibility.	Character data
LSClinicalFollowUpSiteLevelAssignee_Subcontractor. SubcontractorName	Contractor name.	Character data
LsCaseReportFormsTracking. Id	Case report form row ID.	Character data
LsCaseReportFormsTracking. CRFPages	Number of case report form pages.	Number
LsCaseReportFormsTracking. ActivityType	Activity type.	Character data
LsCaseReportFormsTracking. ActivityUID	Activity ID.	Character data
LsCaseReportFormsTracking. Category	Category.	Character data

Table 1244. Response Message Description: All SWILSClinicalTripReportInterfaceService Query Operations

Node	Description	Type
LsCaseReportFormsTracking. Comments	Comments.	Character data
LsCaseReportFormsTracking. OwnedById	Owner user ID.	Character data
LsCaseReportFormsTracking. ParentActivityId	Parent activity ID.	Character data
LsCaseReportFormsTracking. ParentTemplateVersion	Template version.	Character data
LsCaseReportFormsTracking. PrivateFlag	Private flag.	Boolean
LsCaseReportFormsTracking. Retrieved	Retrieved flag.	Character data
LsCaseReportFormsTracking. RetrievedDate	Retrieved date.	UTC Date Time
LsCaseReportFormsTracking. SourceDocumentVerified	Source Document Verified flag.	Boolean
LsCaseReportFormsTracking. SourceDocumentVerifiedDate	Source document verification date	UTC Date Time
LsCaseReportFormsTracking. SubjectInitial	Subject initial.	Character data
LsCaseReportFormsTracking. SubjectNumber	Subject number.	Character data
LsCaseReportFormsTracking. Visit	Visit name.	Character data
LsCaseReportFormsTracking. VisitType	Visit type.	Character data
LsClinicalGeoLocation. Id	Geo location row ID.	Character data
LsClinicalGeoLocation. Comments	Comments.	Character data
LsClinicalGeoLocation. EmpId	Employee ID.	Character data
LsClinicalGeoLocation. Latitude	Latitude.	Number
LsClinicalGeoLocation. LoginId	Login user.	Character data
LsClinicalGeoLocation. Longitude	Longitude.	Number
LsClinicalGeoLocation. SiteVisitId	Site visit row ID.	Character data
LsClinicalGeoLocation. VisitDate	Visit date.	Date Time

SWILSClinicalTripReportInterfaceService Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1245](#).

Table 1245.SWILSClinicalTripReportInterfaceService Service Object

Name	Boundary Object Type	Class
LS Clinical Trip Report Interface Services	Business Service	CSSEAIDataSyncService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1246](#).

Table 1246.SWILSClinicalTripReportInterfaceService Data Object

Siebel Repository Name	External Name
LS Clinical Trip Report Interface IO	Clinical Trip Report

Example Package for SWILSClinicalTripReportInterfaceService

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

- ... \SWILSClinicalTripReportInterfaceService\SWILSClinicalTripReportInterfaceService-QueryByExample-request.xml
- ... \SWILSClinicalTripReportInterfaceService\SWILSClinicalTripReportInterfaceService-QueryPage-request.xml
- ... \SWILSClinicalTripReportInterfaceService\SWILSClinicalTripReportInterfaceService-QueryById-request.xml
- ... \SWILSClinicalTripReportInterfaceService\SWILSClinicalTripReportInterfaceService-InsertOrUpdate-request.xml
- ... \SWILSClinicalTripReportInterfaceService\SWILSClinicalTripReportInterfaceService-Update-request.xml
- ... \SWILSClinicalTripReportInterfaceService\SWILSClinicalTripReportInterfaceService-Synchronize-request.xml

Interface Description (WSDL) for SWILSClinicalTripReportInterfaceService

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

... \SWILSClinicalTripReportInterfaceService\SWILSClinicalTripReportInterfaceService-QueryByExample.WSDL

... \SWILSClinicalTripReportInterfaceService\SWILSClinicalTripReportInterfaceService-QueryPage.WSDL

... \SWILSClinicalTripReportInterfaceService\SWILSClinicalTripReportInterfaceService-QueryById.WSDL

... \SWILSClinicalTripReportInterfaceService\SWILSClinicalTripReportInterfaceService-InsertOrUpdate.WSDL

... \SWILSClinicalTripReportInterfaceService\SWILSClinicalTripReportInterfaceService-Synchronize.WSDL

... \SWILSClinicalTripReportInterfaceService\SWILSClinicalTripReportInterfaceService-Update.WSDL

SWILSClinicalTripReportTemplates

This Web service returns only those templates whose type is Clinical Trip Report. This is a specific Web service to LS Clinical as it returns only clinical trip report types. The external application can filter the data using available fields in the Web service. This Web service supports only one operation: QueryByExample

SWILSClinicalTripReportTemplates Operations

For a list of operations associated with this Web service, see [Table 1247](#).

Table 1247. SWILSClinicalTripReportTemplates Operations

Operation Name	Description
TripReportTemplateQueryByExample	Used to query trip report templates whose type is Clinical Trip Report only.

Request Message Description: TripReportTemplateQueryByExample

You can use available tags to filter the data. If no data is provided for any tag the Web service returns all available trip report templates. The most important tag in this request message is 'Name'. Use this tag to retrieve specific trip report templates

Response Message Description: TripReportTemplateQueryByExample

For an example of the response message, see “[Example Package for SWILSClinicalGetSmartScriptDetails](#)” on page 579.

SWILSClinicalTripReportTemplates Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1248](#).

Table 1248.SWILSClinicalTripReportTemplates Service Object

Name	Boundary Object Type	Class
LS Clinical Trip Report Template Service	Business Service	CSSEAIDataSyncService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1249](#).

Table 1249.SWILSClinicalTripReportTemplates Data Object

Siebel Repository Name	External Name
LS Clinical Trip Report Template IO	LS Clinical Trip Report Template
LS Clinical Trip Report Template Internal IO	LS Clinical Trip Report Template

Example Package for SWILSClinicalTripReportTemplates

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \SWILSClinicalTripReportTemplates\SWILSClinicalTripReportTemplates-QueryByExample-request.xml
```

Response

See the following file to view the sample code:

```
... \SWILSClinicalTripReportTemplates\SWILSClinicalTripReportTemplates-response.xml
```

Interface Description (WSDL) for SWILSClinicalTripReportTemplates

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

...\SWILSClinicalTripReportTemplates\SWILSClinicalTripReportTemplates.WSDL

SWI LS Medical Product Issue Create Inbox Item Inbound

Use this Web service to create inbox items with provided comments to invoke a message to owners of a product issue in Siebel Life Sciences. An external application invokes this Web service with a required product issue ID, and, optionally, with comments. When the inbox items are created with the product issue number as the subject, the product issue owners click the hyperlink to navigate to the corresponding product issue. An error message is returned in the event of failed connection attempts.

SWI LS Medical Product Issue Create Inbox Item Inbound Operations

For a list of operations associated with this Web service, see [Table 1250](#).

Table 1250.SWI LS Medical Product Issue Create Inbox Item Inbound Operations

Name	Description
LS Medical Product Issue Create Inbox Item Inbound	Creates an inbox item for the product issue ID provided in the Web service

Request Message Description: LS Medical Product Issue Create Inbox Item Inbound

For a description of this request message, see [Table 1251](#).

Table 1251.Request Message Description: LS Medical Product Issue Create Inbox Item Inbound

Node	Description	Type
Id	Required. The product issue ID.	Character data
OwnerComments	Optional. The message that is passed to the product issue owners.	Character data

Response Message Description: LS Medical Product Issue Create Inbox Item Inbound

There is no response message for operation.

SWI LS Medical Product Issue Create Inbox Item Inbound Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Workflow)

For a description of the service objects for this Web service, see [Table 1252](#).

Table 1252.SWI Medical Product Issue Create Inbox Item Inbound Service Object

Name	Boundary Object Type	Class
LS Medical Product Issue Create Inbox Item Inbound	Workflow	Not applicable

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1253](#).

Table 1253.SWI Medical Product Issue Create Inbox Item Inbound Data Object

Siebel Repository Name	External Name
LSMedicalFromSafetyIntegProductIssueInterface	LS Medical Product Issue

Example Package for SWI LS Medical Product Issue Create Inbox Item Inbound

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \LSMedicalProductIssue\CreateInboxItem_request.xml
```

Interface Description (WSDL) for SWI LS Medical Product Issue Create Inbox Item Inbound

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \LSMedicalProductIssue\SWI_LS_Medical_Product_Issue_Create_Inbox_Item_Inbound.wsdl
```

SWI LS Medical Update Product Issue Inbound

Use this Web service to update product issue information such as AE Case ID, Safety Received Date, Status, and so on in Siebel Life Sciences. An external application invokes this Web service with the product issue ID, and with the new data updates to the information already in the Siebel database. An error message is returned in the event of failed connection attempts.

SWI LS Medical Update Product Issue Inbound Operations

For a list of operations associated with this Web service, see [Table 1254](#).

Table 1254. SWI LS Medical Update Product Issue Inbound Operations

Name	Description
LS Medical Update Product Issue Inbound	Updates Product Issue information such as AE Case ID, Safety Received Date, and Status

Request Message Description: LS Medical Update Product Inbound

For a description of this request message, see [Table 1255](#).

Table 1255. Request Message Description: LS Medical Update Product Inbound

Node	Description	Type
Id	Required. The product issue ID.	Character data
AECASEID	Optional. Corresponding safety system ID.	Character data
SafetyReceivedDate	Optional. The date on which safety system accepted the product issue.	Date
Status	Optional. The status of the product issue.	Character data

Response Message Description: LS Medical Update Product Inbound

There is no response message for operation.

SWI LS Medical Update Product Issue Inbound Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Workflow)

For a description of the service objects for this Web service, see [Table 1256](#).

Table 1256.SWI Medical Update Product Issue Inbound Service Object

Name	Boundary Object Type	Class
LS Medical Update Product Issue Inbound	Workflow	Not applicable

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1257](#).

Table 1257.SWI Medical Product Issue Create Inbox Item Inbound Data Object

Siebel Repository Name	External Name
LSMedicalFromSafetyIntegProductIssueInterface	LS Medical Product Issue

Example Package for SWI LS Medical Update Product Issue Inbound

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \LSMedicalProductIssue\UpdateProductIssue_request.xml
```

Interface Description (WSDL) for SWI LS Medical Update Product Issue Inbound

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \LSMedicalProductIssue\SWI_LS_Medical_Update_Product_Issue_Inbound.wsdl
```

SWIMergeServices

Use this inbound Web service to support merging of Account, Contact and Address records.

SWIMergeServices Operations

For a list of operations associated with this Web service, see [Table 1258](#).

Table 1258.FetchAccountSiebelReqABCImpl Operations

Name	Description
SWIMergeServices	<p>Calls the Merge method of the business service SWI Merge Service which is used for merging one or more accounts to another account record. This Web service merges child records of the losing objects to the winning object and deletes the losing object records.</p> <p>Takes the business object name, business component name, one winning record's ID value and one or more losing record's ID values as the arguments in .xml format.</p>

Request Message Description: SWIMergeServices

Specifies the Siebel business object name and business component name, one winning object record's ID values and one or more losing objects record's ID values.

For a description of this request message, see [Table 1259](#).

Table 1259.Request Message Description: SWIMergeServices

Node	Description	Type
ListOfSWImergeobjectIO	An instance of the integration object ListOfSWImergeobjectIO.	Integration Object
The following nodes apply to ListOfSWImergeobjectIO.		
SWIMergeObject		
BusinessComponentName	Name of business component.	String
BusinessObjectName	Name of business object.	String
MergeId	ID number assigned to merged item.	String
ListofSWILosingObject	Container element for the Losing Object details which is an instance of the VBC SWI Losing Object. Contains the details of the object that is merged to another object.	Integration Component
SWILosingObject	Losing object.	String
LosingObjectId	Losing object ID.	String
ParentRowId	Parent row ID of losing object.	String
ListOfSWIWinningObject	Container element for the Winning Object details which is an instance of the VBC SWI Winning Object. Contains the details of the object that is merged to another object.	Integration Component

Table 1259. Request Message Description: SWIMergeServices

Node	Description	Type
SWIWinningObject	Winning object.	String
ParentRowId	Parent row ID of winning object.	String
WinningObjectId	Winning object ID.	String

Response Message Description: SWIMergeServices

For a description of this response message, see [Table 1260](#).

Table 1260. Response Message Description: SWIMergeServices

Node	Description	Type
ListOfSWIMergeobjectIO	An instance of the integration object ListofSWIMergeobjectIO.	Integration Object
The following nodes apply to ListOfSWIMergeobjectIO		
SWIMergeObject	Integration object name.	Integration Object
BusinessComponentName	Name of the business component.	String
BusinessObjectName	Name of the business object.	String
MergeId	ID number assigned to merged item.	String
ListofSWILosingObject	Container element for the Losing Object details which is an instance of the VBC SWI Losing Object. Contains the details of the object that is merged to another object.	Integration Component
SWILosingObject	Losing object.	String
LosingObjectId	Losing object ID.	String
ParentRowId	Parent row ID of losing object.	String
ListOfSWIWinningObject	Container element for the Winning Object details which is an instance of the VBC SWI Winning Object. Contains the details of the object that is merged to another object.	Integration Component
SWIWinningObject	Winning object.	String
ParentRowId	Parent row ID of winning object.	String
WinningObjectId	Winning object ID.	String

SWIMergeServices Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1261](#).

Table 1261.SWIMergeServices Service Object

Siebel Repository Name	Boundary Object Type	Class
SWIMergeServices	Business Service	CSSMergeService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1262](#).

Table 1262.SWIMergeServices Data Object

Siebel Repository Name	External Name
SWIMergeObjectIO	SWI Merge Object

SWIOrderUpsert

Use this Web service to perform the following basic operations on a sales order:

- Back up the order.
- Update or insert (upsert) the order.
- Cascade down updates to the order.
- Trigger an auto asset for the order.

SWIOrderUpsert Operations

For a list of operations associated with this Web service, see [Table 1263](#).

Table 1263.SWIOrderUpsert Operations

Name	Description
SWIOrderUpsert	Inserts or updates order details

Request Message Description: SWIOrderUpsert

For a description of this request message, see [Table 1264](#).

Table 1264.Request Message Description: SWIOrderUpsert

Node	Description	Type
SWIOrderIO	Required	Integration Object
Auto-Asset Flag	Optional	String
Backup Order Flag	Optional	String
Cascade Down Flag	Optional	String
UTCCanonical	A value of Y means that all date-type fields in the payload are in UTC standard format.	String

Response Message Description: SWIOrderUpsert

For a description of this response message, see [Table 1265](#).

Table 1265.Response Message Description: SWIOrderUpsert

Node	Description	Type
SWIOrderIO	Required. An instance of the integration object SWIOrder.	Integration Object

SWIOrderUpsert Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Workflow)

For a description of the service objects for this Web service, see [Table 1266](#).

Table 1266.SWIOrderUpsert Service Object

Name	Boundary Object Type	Class
SWIOrderupsert	Workflow	Not applicable.

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1267](#).

Table 1267.SWIOrderUpsert Data Object

Siebel Repository Name	External Name
SWIOrderIO	PDS Simplified Order

Interface Description (WSDL) for SWIOrderIO

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \SWIOrderUpsert\SWIOrderIO.wsdl

SWI Price List IO

Use this Web service for querying, creating, updating, and deleting price lists. The Web service enables you to associate an existing organization or many organizations with a price list. For working with price list line items, see “[SWIISPriceListItemIO](#)” on page 652.

SWIPriceList Operations

For a list of operations associated with this Web service, see [Table 1268](#).

Table 1268.SWIPriceList Operations

Name	Description
SWIPriceList_Insert	Creates a price list.
SWIPriceList_Update	Provides the name of the price list along with the updated field values and the operation updates the price list.
SWIPriceList_QueryByExample	Provides the price list using a unique value, such as name, and all price list details are returned.
SWIPriceList_QueryById	Provides price list ID and all price list details are returned.
SWIPriceList_Delete	Deletes an existing price list.

Request Message Description: SWIPriceList_Insert

For a description of this request message, see [Table 1269](#).

Table 1269.Request Message Description: SWIPriceList_Insert

Node	Description	Type
SWI Price List IO	Required. An instance of the Integration Object Price List. Price List is the parent header and Organization is the child.	Integration Object

Response Message Description: SWIPriceList_Insert

For a description of this response message, see [Table 1270](#).

Table 1270. Response Message Description: SWIPriceList_Insert

Node	Description	Type
ID	The price list ID created after an insert operation.	String
Name	The name of the price list.	String.

Request Message Description: SWIPriceList_Update

For a description of this request message, see [Table 1271](#).

Table 1271. Request Message Description: SWIPriceList_Update

Node	Description	Type
SWI Price List IO	Required. An instance of the Integration Object Price List. Price List is the parent header and Organization is the child.	Integration Object

Response Message Description: SWIPriceList_Update

For a description of this response message, see [Table 1272](#).

Table 1272. Response Message Description: SWIPriceList_Update

Node	Description	Type
ID	The price list ID created after an update operation.	String
Name	The name of the price list.	String.

Request Message Description: SWIPriceList_QueryByExample

For a description of this request message, see [Table 1273](#).

Table 1273. Request Message Description: SWIPriceList_QueryByExample

Node	Description	Type
SWI Price List IO	Required. An instance of the Integration Object Price List. Price List is the parent header and Organization is the child.	Integration Object

Response Message Description: SWIPriceList_QueryByExample

For a description of this response message, see [Table 1274](#).

Table 1274. Response Message Description: SWIPriceList_QueryByExample

Node	Description	Type
ID	The price list ID displayed after an query operation.	String
Name	The name of the price list.	String.
Organization	Organization name of the price list.	String

Request Message Description: SWIPriceList_QueryById

For a description of this request message, see [Table 1275](#).

Table 1275. Request Message Description: SWIPriceList_QueryById

Node	Description	Type
SWI Price List IO	Required. An instance of the Integration Object Price List. Price List is the parent header and Organization is the child.	Integration Object

Response Message Description: SWIPriceList_QueryById

For a description of this response message, see [Table 1276](#).

Table 1276. Response Message Description: SWIPriceList_QueryById

Node	Description	Type
ID	The price list ID displayed after the query operation.	String
Name	The name of the price list.	String.
Organization	Organization name of the price list.	String

Request Message Description: SWIPriceList_Delete

For a description of this request message, see [Table 1277](#).

Table 1277.Request Message Description: SWIPriceList_Delete

Node	Description	Type
SWI Price List IO	Required. An instance of the Integration Object Price List. Price List is the parent header, and Organization is the child.	Integration Object

Response Message Description: SWIPriceList_Delete

For a description of this response message, see [Table 1278](#).

Table 1278.Response Message Description: SWIPriceList_Delete

Node	Description	Type
ID	The price list ID deleted after the delete operation.	String
Name	The name of the price list.	String.

SWI Price List IO Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1279](#).

Table 1279.SWI Price List IO Service Object

Name	Boundary Object Type	Class
SWI Price List BS	Business Service	CSSEAIDataSyncService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1280](#).

Table 1280.SWI Price List IO Data Object

Siebel Repository Name	External Name
SWI Price List IO	Admin Price List

Example Package for SWI Price List IO

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

Request

See the following files to view the sample code:

```
...\SWIPriceListIO\Delete\request.xml  
...\SWIPriceListIO\Insert\request.xml  
...\SWIPriceListIO\QueryByExample\request.xml  
...\SWIPriceListIO\QueryById\request.xml  
...\SWIPriceListIO\Update\request.xml
```

Response

See the following files to view the sample code:

```
...\SWIPriceListIO\Delete\response.xml  
...\SWIPriceListIO\Insert\response.xml  
...\SWIPriceListIO\QueryByExample\response.xml  
...\SWIPriceListIO\QueryById\response.xml  
...\SWIPriceListIO\Update\response.xml
```

Interface Description (WSDL) for SWI Price List IO

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

```
...\SWIPriceListIO\WSDL\http_siebel_asi_SWIPriceList.WSDL
```

SWIISSPriceListItemIO

Use this inbound Web service to perform basic operations, such as create, update, modify, and delete price list line items.

SWIISSPriceListItemIO Operations

For a list of operations associated with this Web service, see [Table 1281](#).

Table 1281.SWIISSPriceListItemIO Operations

Name	Description
SWIPriceListItemInsert	Creates a price list line item.
SWIPriceListItemUpdate	Updates a price list line item.
SWIPriceListItemUpsert	Inserts or updates a price list item.
SWIPriceListItemDelete	Deletes a price list line item.

Request Message Description: SWIPriceListItemInsert

For a description of this request message, see [Table 1282](#).

Table 1282.Request Message Description: SWIPriceListItemInsert

Node	Description	Type
SWIISSPriceListItemIO	Required. An instance of the Integration Object SWIISSPriceListItem. To insert a price list line item, note that price list (PriceListId), product (ProductId) and start date (StartDate) are user keys and the payload must provide these fields.	Integration Object

Response Message Description: SWIPriceListItemInsert

For a description of this response message, see [Table 1283](#).

Table 1283.Response Message Description: SWIPriceListItemInsert

Node	Description	Type
PriceListItemID	The PriceListItemID that is created after the insert operation.	String
PriceListId	The PriceListID that is associated with PriceListItemID.	String
ProductId	The Product ID that is associated to PriceListItemID.	String
StartDate	Start date of the price list. StartDate is part of the user key.	String

Request Message Description: SWIPriceListItemUpdate

For a description of this request message, see [Table 1284](#).

Table 1284.Request Message Description: SWIPriceListItemUpdate

Node	Description	Type
SWIISSPriceListItemIO	Required. An instance of the integration object SWIISSPriceListItem. To update an existing price list line item, price list (PriceListId), product (ProductId) and start date (StartDate) are user keys and payload must provide these fields.	Integration Object

Response Message Description: SWIPriceListItemUpdate

For a description of this response message, see [Table 1285](#).

Table 1285.Response Message Description: SWIPriceListItemUpdate

Node	Description	Type
PriceListItemID	The PriceListItemID that is updated after the update operation.	String
PriceListId	The PriceListID that is associated with PriceListItemID	String
ProductId	The Product ID that is associated to PriceListItemID.	String

Request Message Description: SWIPriceListItemUpsert

For a description of this request message, see [Table 1286](#).

Table 1286.Request Message Description: SWIPriceListItemUpsert

Node	Description	Type
SWIISSPriceListItemIO	Required. An instance of the integration object SWIISSPriceListItem. Price List Item - Import is the parent header.	Integration Object

Response Message Description: SWIPriceListItemUpsert

For a description of this response message, see [Table 1287](#).

Table 1287. Response Message Description: SWIPriceListItemUpsert

Node	Description	Type
PriceListItemID	The PriceListItemID that is created or updated after the upsert operation.	String
PriceListId	The PriceListID that is associated with PriceListItemID	String
ProductId	The Product ID that is associated to PriceListItemID.	String

Request Message Description: SWIPriceListItemDelete

For a description of this request message, see [Table 1288](#).

Table 1288. Request Message Description: SWIPriceListItemDelete

Node	Description	Type
SWIISPriceListItemIO	Required. An instance of the integration object SWIISPriceListItem. Price List Item - Import is the parent header.	Integration Object

Response Message Description: SWIPriceListItemDelete

For a description of this response message, see [Table 1289](#).

Table 1289. Response Message Description: SWIPriceListItemDelete

Node	Description	Type
PriceListItemID	The PriceListItemID of the record that is deleted after the delete operation.	String
PriceListId	The PriceListID that is associated with PriceListItemID	String
ProductId	The Product ID that is associated to PriceListItemID.	String

SWIISPriceListItemIO Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1290](#).

Table 1290.SWIISSPriceListItemIO Service Object

Name	Boundary Object Type	Class
SWIPriceListItem	Business Service	CSSEAIDataSyncService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1291](#).

Table 1291.SWIISSPriceListItemIO Data Object

Siebel Repository Name	External Name
SWIISSPriceListItemIO	Admin Price List

Example Package for SWIISSPriceListItemIO

To view an example of messages for this Web service, navigate to the documentation library for Siebel applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```

... \SWIPriceListItemInsert\SWIPriceListItemInsert_request.xml
... \SWIPriceListItemUpdate\SWIPriceListItemUpdate_request.xml
... \SWIPriceListItemUpsert\SWIPriceListItemUpsert_request.xml
... \SWIPriceListItemDelete\SWIPriceListItemDelete_request.xml
    
```

Response

See the following file to view the sample code:

```

... \SWIPriceListItemInsert\SWIPriceListItemInsert_response.xml
... \SWIPriceListItemUpdate\SWIPriceListItemUpdate_response.xml
... \SWIPriceListItemUpsert\SWIPriceListItemUpsert_response.xml
... \SWIPriceListItemDelete\SWIPriceListItemDelete_response.xml
    
```

Interface Description (WSDL) for SWIISSPriceListItemIO

To view the interface description for this Web service, navigate to the documentation library for Siebel applications on Oracle Technology Network, and click the Related Files link next to the link for Siebel CRM Web Services Reference to access a zip file. Extract the files in the zip file.

...\SWIISSPriceListItemIO\SWIISSPriceListItemIO.wsdl

SWIProductAttributeImport

Use this Web service to perform basic operations on attributes.

SWIProductAttributeImport Operations

For a list of operations associated with this Web service, see [Table 1292](#).

Table 1292.SWIProductAttributeImport Operations

Name	Description
SWIAttributeImportUpsert	Creates a new or updates an existing attribute.

Request Message Description: SWIProductAttributeImport

For a description of this request message, see [Table 1293](#).

Table 1293.Request Message Description: SWIProductAttributeImport

Node	Description	Type
SWIAttributeIntegrationIO	Required. An instance of the integration object SWIAttributeIntegration	Integration Object
SyncChild	Upsert operation behaves as Synchronize if SyncChild flag is set to Y. NOTE: The default value of this flag is Y.	String
UTCCanonical	A value of Y means that all date-type fields in the payload are in UTC standard format.	String

Response Message Description: SWIProductAttributeImport

For a description of this response message, see [Table 1294](#).

Table 1294.Response Message Description: SWIProductAttributeImport

Node	Description	Type
SWIAttributeIntegrationIO	Returns an instance of the integration object SWIAttributeIntegration. NOTE: Returns only those fields specified in the status key of Integration components that are part of SWI Admin ISS Attribute Definition integration object.	Integration Object.
Error Message	Error message (if any).	String

SWIProductAttributeImport Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1295](#).

Table 1295.SWIProductAttributeImport Service Object

Siebel Repository Name	Boundary Object Type	Class
SWI Attribute Import	Business Service	CSSCMUProdWebSvc

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1296](#).

Table 1296.SWIProductAttributeImport Data Object

Siebel Repository Name	External Name
SWIAttributeIntegrationIO	SWI Attribute Integration
SWI Admin ISS Attribute Definition	SWI Admin ISS Attribute Definition

Methods

For a description of the methods for this Web service, see [Table 1297](#).

Table 1297.SWIProductAttributeImport Methods

Operation	Method
SWIAttributeImportUpsert	Insert or Update

Example Package for SWIProductAttributeImport

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \SWIProductAttributeImport\SWIProductAttributeImport_request.xml
```

Response

See the following file to view the sample code:

...\SWIProductAttributeImport\SWIProductAttributeImport_response.xml

Interface Description (WSDL) for SWIProductAttributeImport

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

...\SWIProductAttributeImport\SWIProductAttributeImport.wsdl

SWIProductClassImport

Use this Web service to perform basic operations on Product Class.

SWIProductClassImport Operations

For a list of operations associated with this Web service, see [Table 1298](#).

Table 1298.SWIProductClassImport Operations

Name	Description
SWIClassImportUpsert	Creates a new or updates an existing product class.

Request Message Description: SWIClassImportUpsert

For a description of this request message, see [Table 1299](#).

Table 1299.Request Message Description: SWIClassImportUpsert

Node	Description	Type
SWIProductClassIntegrationIO	Required. An instance of the integration object SWIProductClassIntegration.	Integration Object
SyncChild	Upsert operation behaves as Synchronize if SyncChild flag is set to Y. NOTE: The default value of this flag is N.	String
UTCCanonical	A value of Y means that all date-type fields in the payload are in UTC standard format.	String

Response Message Description: SWIClassImportUpsert

For a description of this response message, see [Table 1300](#).

Table 1300. Response Message Description: SWIClassImportUpsert

Node	Description	Type
SWIProductClassIntegrationIO	Required. An instance of the integration object SWIProductClassIntegration. NOTE: Returns only those fields specified in the status key of Integration components that are part of SWI Admin ISS Class VOD Definition integration object.	Integration Object.

SWIClassImportUpsert Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1301](#).

Table 1301. SSWIClassImportUpsert Service Object

Siebel Repository Name	Boundary Object Type	Class
SWI Product Class Import	Business Service	CSSCMUProdWebSvc

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1302](#).

Table 1302. SWIClassImportUpsert Data Object

Siebel Repository Name	External Name
SWIProductClassIntegrationIO	SWI Class Integration
SWI Admin ISS Class VOD Definition	SWI Admin ISS Class VOD Definition

Methods

For a description of the methods for this Web service, see [Table 1303](#).

Table 1303. SWIClassImportUpsert Methods

Operation	Method
SWIClassImportUpsert	Insert or Update

Example Package for SWIProductClassImport

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \SWIProductClassImport\SWIProductClassImport_request.xml
```

NOTE: The following xml tags in the `SwiProductStructureVbc/` container refer to the parent class instead of the product.

```
<ProductId/>
< ProductName/>
< ProductVendorId/>
< ProductBusinessUnitId/>
```

Response

See the following file to view the sample code:

```
... \SWIProductClassImport\SWIProductClassImport_response.xml
```

Interface Description (WSDL) for SWIProductClassImport

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \SWIProductClassImport\SWIProductClassImport.wsdl
```

SWIProductImport

Use this inbound Web service to support Insert or Update of product details which allows the import of external product information into the Siebel database. Also consider the following:

- The Web service is only available with Oracle Application Integration Architecture and has been created for synchronizing Oracle products with Siebel CRM products.
- This Web service supports a subset of the Siebel ISS Authoring Import Export service functionality.
- This Web service uses the Siebel EAI interface.

SWIProductImport Operations

For a list of operations associated with this Web service, see [Table 1304](#).

Table 1304.SWIProductImport Operations

Name	Description
SWIProductImportUpsert	Calls the Insert or Update method of the business service SWI Product Import used for inserting new product details into the Siebel database. If the product is already present, then the product is updated with the details from the request message.

Request Message Description: SWIProductImportUpsert

Insert one or more products into the Siebel database. If the Product is already present in the Siebel database, then the Product record will be updated with the details from the request message.

For a description of this request message, see [Table 1305](#).

Table 1305.Request Message Description: SWIProductImportUpsert

Node	Description	Type
SWIProductIntegrationIO	Required. An instance of the integration object SWIProductIntegration.	Integration Object
SyncChild	The upsert operation behaves as a synchronize operation if the SyncChild flag is set to Y. NOTE: The default value of this flag is Y.	String
UTCCanonical	A value of Y means that all date-type fields in the payload are in UTC standard format.	String
ActiveFlag	Indicates whether record is active.	String
BillableFlag	Indicates whether record is billable.	String
BusinessUnitId	ID of business unit associated with product record.	String
Description	Description.	String
EffectiveEndDate	Effective end date of record.	String
EffectiveStartDate	Effective start date of record.	String
ExternalInventorySystemRef	Reference number from external inventory system.	String
IntegrationId	Integration ID.	String
InventoryFlag	Flag to indicate if product is tracked in inventory.	String
LeadTime	Lead time for product delivery.	String
ProductCost	Cost of product.	String

Table 1305.Request Message Description: SWIProductImportUpsert

Node	Description	Type
ProductName	Name of product.	String
ProductSerializedFlag	Serialized flag. Indicates if instances of this product are tracked as serialized assets or simply as quantities of product. Instances of a serialized product will each carry a unique serial number (or license number, policy number, and so on). Quantities of non-serialized assets are sometimes tracked as lots which may have a unique lot number.	String
ProductVersion	Version of product.	String
ReleaseFlag	Flag which indicates whether a product will be released at the time of a synchronization.	String
SalesProductFlag	Sales product flag. Sales products appear on the product picklist when a user defines products for an opportunity.	String
ServiceTerms	Service terms associated with product.	String
ShipFlag	Flag to indicate whether a product has to be shipped.	String
Status	Status of product. Active or Inactive.	String
StructureType	Depending on the product type, users are allowed to create a simple bill of materials without using Siebel Configurator.	String
UnitofMeasure	Unit of measure.	String
ListofProductInvloc	Location of product in inventory.	String

Response Message Description: SWIProductImportUpsert

For a description of this response message, see [Table 1306](#).

Table 1306.Response Message Description: SWIProductImportUpsert

Node	Description	Type
SWIProductIntegrationIO	Returns an instance of SWIProductIntegration. NOTE: Returns only those fields specified in the status key of Integration components that are part of SWI Admin ISS Product Definition integration object.	Integration Object
ErrorMessage	Error Message (if any).	String
Id	Product ID.	String

Table 1306. Response Message Description: SWIProductImportUpsert

Node	Description	Type
ActiveFlag	Indicates whether record is active.	String
AutoExplodeFlag	Indicates whether or not the product needs to be automatically ungrouped and enforce ungrouped quantity equal to 1.	String
BillableFlag	Indicates whether record is billable.	String
BusinessUnitId	ID of business unit associated with product record.	String
CheckEligibilityFlag	Indicates whether or not to apply eligibility and compatibility rules for this product.	String
Description	Description of product.	String
EffectiveEndTime	Effective end date of record.	String
EffectiveStartTime	Effective start date of record.	String
ExternalInventorySystemRef	Reference number from external inventory system.	String
InclusiveEligibilityFlag	Indicates whether or not to process a particular product for inclusive eligibility rules. Inclusive eligibility rules are defined in the eligibility matrix with matrix rule type code set as Inclusive.	String
IntegrationId	Integration ID.	String
InventoryFlag	Flag which indicates if a product is tracked in inventory.	String
LeadTime	Lead time for product delivery.	String
OrderableFlag	Flag which indicates whether a product is orderable.	String
PriceType	Price type, such as One-time, Recurring, Usage and so on.	String
PrimaryOrganizationId	ID of primary organization associated with product record.	String
ProductCost	Cost of product.	String
ProductId	ID of product.	String
ProductName	Name of product.	String

Table 1306. Response Message Description: SWIProductImportUpsert

Node	Description	Type
ProductSerializedFlag	Serialized flag. Indicates if instances of this product are tracked as serialized assets or simply as quantities of product. Instances of a serialized product will each carry a unique serial number (or license number, policy number, and so on). Quantities of non-serialized assets are sometimes tracked as lots which may have a unique lot number.	String
ProductType	Product type.	String
ProductVersion	Product version.	String
ReleaseFlag	Flag which indicates whether a product will be released at the time of a synchronization.	String
SalesProductFlag	Sales product flag. Sales products appear on the product picklist when a user defines products for an opportunity.	String
ServiceInstanceFlag	Flag to indicate whether a product requires a metering point.	String
ServiceProductFlag	Sales and Service flag. Sales service products are services that are priced based on the tangible product for which they are purchased (an extended warranty, for example). These products appear on the picklist that pops up when the user clicks the Service button for a tangible product on a quote. When you choose a sales service product from the list, a new quote item for the product is added to the quote and priced according to the value of the tangible product to which it applies.	String
ShipFlag	Flag to indicate whether a product needs to be shipped.	String
Status	Status of product order.	String
StructureType	Depending on the product type, users can create a simple bill of materials without using Siebel Configurator.	String
TrackAsAssetFlag	Flag to indicate that a product needs to be tracked as an asset.	String
Type	Product type.	String
UnitofMeasure	Unit of measure.	String
VendorId	ID of product vendor.	String
ListofProductInvLoc	Location of product in inventory.	String

SWIProductImport Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1307](#).

Table 1307.SWIProductImport Service Object

Siebel Repository Name	Boundary Object Type	Class
SWIProductImport	Business Service	CSSCMUProdWebSvc

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1308](#).

Table 1308.SWIProductImport Data Object

Siebel Repository Name	External Name
SWIProductIntegrationIO	SWI Product Integration
SWI Admin ISS Product Definition	SWI Admin ISS Product Definition

Methods

For a description of the methods for this Web service, see [Table 1309](#).

Table 1309.SWIProductImport Method

Operation	Method
SWIProductImportUpsert	InsertOrUpdate

Example Package for SWIProductImport

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \SWIProductImport\SWIProductImport_request.xml
```

Response

See the following file to view the sample code:

...\SWIProductImport\SWIProductImport_response.xml

Interface Description (WSDL) for SWIProductImport

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

...\SWIProductImport\SWIProductIntegrationIO.wsdl

SWIProductLine

Use this Web service to create, update, and query product lines.

SWIProductLine Operations

For a list of operations associated with this Web service, see [Table 1310](#).

Table 1310.SWIProductLine Operations

Name	Description
SWIProductLine_Insert	Used to create a product line.
SWIProductLine_Update	Used to update an existing product line.
SWIProductLine_Upsert	Used to create a new product line using an upsert operation.
SWIProductLine_Synchronize	Used to synchronize a new product line, or to synchronize data to an existing product line.
SWIProductLine_QueryById	Used to perform queries for existing product lines using the Row ID.
SWIProductLine_QueryByExample	Used to query for existing product lines using the QueryByExample method.
SWIProductLine_Delete	Used to delete a product line.

Request Message Description: SWIProductLine_Insert

For a description of this request message, see [Table 1311](#).

Table 1311.Request Message Description: SWIProductLine_Insert

Node	Description	Type
ListOfAdminProductLine	An instance of the integration object ListOfAdminProductLine.	Integration Object
AdminProductLine	Integration Component (XML Tag) corresponding to the Admin Product Line Business component. You can create multiple instances of AdminProductLine under ListOfAdminProductLine to process different product lines at one time.	Integration Component
Description	Description of the product line.	String
Name	Name of the product line.	String
ListofAdminProductLine_Position	Positions associated with the product line.	Integration Component
Position	Position, such as Administrator.	String
ProductLineManager	Product line manager.	String
Division	Division within the company.	String
ListofAdminProductLine_ InternalProduct	Internal products associated with the product line.	Integration Component
Product	Product name.	String
IntegrationId	Integration ID of the product record.	String
Primary Organization	The primary organization for the product.	String

Response Message Description: SWIProductLine_Insert

For a description of this response message, see [Table 1312](#).

Table 1312.Response Message Description: SWIProductLineInsert

Node	Description	Type
ListOfAdminProductLine	An instance of the integration object ListOfAdminProductLine.	Integration Object
AdminProductLine	Integration Component (XML Tag) corresponding to the Admin Product Line Business component. You can create multiple instances of AdminProductLine under ListOfAdminProductLine to process different product lines at one time.	String
Id	Product line ID.	String

Table 1312. Response Message Description: SWIProductLineInsert

Node	Description	Type
Description	Product line description.	String
Name	Product line name.	String
PrimaryPositionId	Primary Position ID.	String
PrimaryProductId	ID of the primary product.	String

Request Message Description: SWIProductLine_Update

For a description of this request message, see [Table 1313](#).

Table 1313. Request Message Description: SWIProductLine_Update

Node	Description	Type
ListOfAdminProductLine	An instance of the integration object ListOfAdminProductLine.	Integration Object
Description	Description of the product line.	String
Name	Name of the product line.	String
ListOfAdminProductLine_Position	Positions associated with the product line.	Integration Component
Position	Position, such as Administrator.	String
ProductLineManager	Product line manager.	String
Division	Division within the company.	String
ListOfAdminProductLine_ InternalProduct	Internal products associated with the product line.	Integration Component
Product	Product name.	String
IntegrationId	Integration ID of the product record.	String
PrimaryOrganization	The primary organization for the product.	String

Response Message Description: SWIProductLine_Update

For a description of this response message, see [Table 1314](#).

Table 1314. Response Message Description: SWIProductLine_Update

Node	Description	Type
ListOfAdminProductLine	An instance of the integration object ListOfAdminProductLine.	Integration Object
AdminProductLine	Integration Component (XML Tag) corresponding to the Admin Product Line Business component. You can create multiple instances of AdminProductLine under ListOfAdminProductLine to process different product lines at one time.	Integration Component
Description	Description of the product line.	String
Name	Name of the product line.	String
ListOfAdminProductLine_Position	Positions associated with the product line.	Integration Component
AdminProductLine_Position IsPrimaryMVG	Admin Product Line_Position integration component instance that corresponds to a primary MVG and is denoted by the attribute IsPrimaryMVG set to Y. This attribute is a hidden integration component field and does not have a corresponding business component field.	Integration Component
Position	Position, such as Administrator.	String
ProductLineManager	Product line manager.	String
Division	Division within the company.	String
ListOfAdminProductLine_InternalProduct	Internal products associated with the product line.	Integration Component
Product	Pproduct name.	String
IntegrationId	Integration ID of the product record.	String
PrimaryOrganization	The primary organization for the product.	String

Request Message Description: SWIProductLine_Upsert

For a description of this request message, see [Table 1315](#).

Table 1315. Request Message Description: SWIProductLine_Upsert

Node	Description	Type
ListOfAdminProductLine	An instance of the integration object ListOfAdminProductLine.	Integration Object
Description	Description of the product line.	String

Table 1315.Request Message Description: SWIProductLine_Upsert

Node	Description	Type
Name	Name of the product line.	String
ListOfAdminProductLine_Position	Positions associated with the product line.	Integration Component
Position	Position, such as Administrator.	String
ProductLineManager	Product line manager.	String
Division	Division within the company.	String
ListOfAdminProductLine_InternalProduct	Internal products associated with the product line.	Integration Component
Product	Product name.	String
IntegrationId	Integration ID of the product record.	String
PrimaryOrganization	The primary organization for the product.	String

Response Message Description: SWIProductLine_Upsert

For a description of this response message, see [Table 1316](#).

Table 1316.Response Message Description: SWIProductLine_Upsert

Node	Description	Type
ListOfAdminProductLine	An instance of the integration object ListOfAdminProductLine.	Integration Object
Description	Description of the product line.	String
Name	Name of the product line.	String
PrimaryPositionId	ID value of the primary position.	String
PrimaryProductId	ID value of the primary product.	String
ListOfAdminProductLine_Position	Positions associated with the product line.	Integration Component
Position	Position, such as Administrator.	String
ProductLineManager	Product line manager.	String
Division	Division within the company.	String
ListOfAdminProductLine_InternalProduct	Internal products associated with the product line.	Integration Component
Product	The product number.	String
IntegrationId	Integration ID of the product record.	String
PrimaryOrganization	The primary organization for the product.	String

Request Message Description: SWIProductLine_Synchronize

For a description of this request message, see [Table 1317](#).

Table 1317. Request Message Description: SWIProductLine_Synchronize

Node	Description	Type
ListOfAdminProductLine	An instance of the integration object ListOfAdminProductLine.	Integration Object
Description	Description of the product line.	String
Name	Name of the product line.	String
ListOfAdminProductLine_Position	Positions associated with the product line.	Integration Component
Position	Position, such as Administrator.	String
ProductLineManager	Product line manager.	String
Division	Division within the company.	String
ListOfAdminProductLine_InternalProduct	Internal products associated with the product line.	Integration Component
Product	Product name.	String
IntegrationId	Integration ID of the product record.	String
PrimaryOrganization	The primary organization for the product.	String

Response Message Description: SWIProductLine_Synchronize

For a description of this response message, see [Table 1318](#).

Table 1318. Response Message Description: SWIProductLine_Synchronize

Node	Description	Type
ListOfAdminProductLine	An instance of the integration object ListOfAdminProductLine.	Integration Object
Id	Product line ID.	String
Description	Description of the product line.	String
Name	Name of the product line.	String
PrimaryPostionId	ID of the primary position.	String
PrimaryProductId	ID of the primary product.	String
ListOfAdminProductLine_Position	Positions associated with the product line.	Integration Component
Position	Position, such as Administrator.	String
PositionId	Position ID.	String
PrimaryEmployeeId	ID of the primary employee.	String

Table 1318. Response Message Description: SWIProductLine_Synchronize

Node	Description	Type
ProductLineManager	Product line manager.	String
Division	Division within the company.	String
AdminProductLine_ InternalProduct	Internal products associated with the product line.	String
Product	Product name.	String
Part	Part number.	String
PrimaryOrganization	The primary organization for the product.	String

Request Message Description: SWIProductLine_QueryById

For a description of this request message, see [Table 1319](#).

Table 1319. Request Message Description: SWIProductLine_QueryById

Node	Description	Type
PrimaryRowId	The row ID of the product line.	String

Response Message Description: SWIProductLine_QueryById

For a description of this response message, see [Table 1320](#).

Table 1320. Response Message Description: SWIProductLine_QueryById

Node	Description	Type
ListOfAdminProductLine	An instance of the integration object ListOfAdminProductLine.	Integration Object
AdminProductLine	Integration Component (XML Tag) corresponding to the Admin Product Line Business component. You can create multiple instances of AdminProductLine under ListOfAdminProductLine to process different product lines at one time.	Integration Component
Description	Description of the product line.	String
IntegrationId	Integration ID of the product record.	String
Name	Name of the product line.	String
PrimaryPositionId	ID of the primary position.	String
ListOfAdminProductLine_Position	An instance of the integration object Admin Product Line_Position.	Integration Object

Table 1320. Response Message Description: SWIProductLine_QueryById

Node	Description	Type
AdminProductLine_PositionIsPrimaryMVG	Admin Product Line_Position integration component instance that corresponds to a primary MVG and is denoted by the attribute IsPrimaryMVG set to Y. This attribute is a hidden integration component field and does not have a corresponding business component field.	Integration Component
Position	Position, such as Administrator.	String
Position_Id	ID of the position.	String
PrimaryEmployeeId	ID of the primary employee.	String
ProductLineManager	Product line manager.	String
WorkPhoneNumber	Work phone number.	String
DivisionIntegrationId	Division integration ID.	String
Division	Division within the company.	String
ListOfAdminProductLine_InternalProduct	Internal products associated with the product line.	Integration Component
AdminProductLine_InternalProductIsPrimaryMVG	Admin Product Line_Internal Product integration component instance that corresponds to a primary MVG and is denoted by the attribute IsPrimaryMVG set to Y. This attribute is a hidden integration component field and does not have a corresponding business component field.	Integration Component
Product	Product name.	String
Part	Part number.	String
IntegrationId	Integration ID of the product record.	String
PrimaryOrganization	The primary organization for the product.	String
VendorIntegrationId	Integration ID of the vendor.	String

Request Message Description: SWIProductLine_QueryByExample

For a description of this request message, see [Table 1321](#).

Table 1321. Request Message Description: SWIProductLine_QueryByExample

Node	Description	Type
ListofAdminProductLine	An instance of the integration object ListOfAdminProductLine.	Integration Object
AdminProductLine	Integration component (XML Tag) corresponding to the Admin Product Line Business component. You can create multiple instances of AdminProductLine under ListOfAdminProductLine to process different product lines at one time.	Integratin Component
Id	Product ID.	String
Created	System timestamp.	String
Updated	System timestamp.	String
ConflictId	Conflict ID.	String
ModId	Modification ID.	String
Description	Product description.	String
IntegrationId	Integration ID of the product record.	String
Name	Product name.	String
PrimaryPositionId	ID value of the primary position.	String
PrimaryProductId	ID value of the primary product.	String
ListofAdminProductLine_Position	Positions associated with the product line.	Integration Component
AdminProductLine_PositionIsPrimaryMVG	Admin Product Line_Position integration component instance that corresponds to a primary MVG and is denoted by the attribute IsPrimaryMVG set to Y. This attribute is a hidden integration component field and does not have a corresponding business component field.	Integration Component
Position	Position, such as Administrator.	String
Position_Id	Position ID.	String
PrimaryEmployeeId	ID of the primary employee.	String
ProductLineManager	Product line manager.	String
WorkPhoneNumber	Work phone number.	String
DivisionIntegrationId	Integration ID of the division.	String

Table 1321. Request Message Description: SWIProductLine_QueryByExample

Node	Description	Type
Division	Division within the company.	String
ListOfAdminProductLine_InternalProduct	Internal products associated with the product line.	Integration Component
AdminProductLine_InternalProduct_IsPrimaryMVG	Admin Product Line_Internal Product integration component instance that corresponds to a primary MVG and is denoted by the attribute IsPrimaryMVG set to Y. This attribute is a hidden integration component field and does not have a corresponding business component field.	Integration Component
Product	Product name.	String
Part	Part number.	String
IntegrationId	Integration ID of the product record.	String
PrimaryOrganization	The primary organization of the product.	String
VendorIntegrationId	Integration ID of the vendor.	String

Response Message Description: SWIProductLine_QueryByExample

For a description of this response message, see [Table 1322](#).

Table 1322. Response Message Description: SWIProductLine_QueryByExample

Node	Description	Type
ListofAdminProductLine	An instance of the integration object ListofAdminProductLine.	Integration Object.
AdminProductLine	Integration Component (XML Tag) corresponding to the Admin Product Line Business component. You can create multiple instances of AdminProductLine under ListOfAdminProductLine to process different product lines at one time.	Integration Component
Description	Description of the product line.	String
IntegrationId	Integration ID of the product line.	String
Name	Name of the product line.	String
PrimaryPositionId	ID of the primary position.	String.
PrimaryProductId	ID of the primary product.	String
ListofAdminProductLine_Position	Positions associated with the product line.	Integration Component

Table 1322. Response Message Description: SWIProductLine_QueryByExample

Node	Description	Type
AdminProductLine_PositionIsPrimaryMVG	Admin Product Line_Position integration component instance that corresponds to a primary MVG and is denoted by the attribute IsPrimaryMVG set to Y. This attribute is a hidden integration component field and does not have a corresponding business component field.	Integration Component
Position	Position, such as Administrator.	String
PrimaryEmployeeId	ID of the primary employee.	String
ProductLineManager	Product line manager.	String
WorkPhoneNumber	Work phone number.	String
DivisionIntegrationId	Integration ID of the division.	String
Division	Division within the company.	String
ListOfAdminProductLine_InternalProduct	Internal products associated with the product line.	Integration Component
Product	Product name.	String
Part	Part number.	String
IntegrationId	Integration ID of the product record.	String
PrimaryOrganization	The primary organization for the product.	String
VendorIntegrationId	Integration ID of the vendor.	String

Request Message Description: SWIProductLine_Delete

For a description of this request message, see [Table 1323](#).

Table 1323. Request Message Description: SWIProductLine_Delete

Node	Description	Type
ListOfAdminProductLine	An instance of the integration object ListOfAdminProductLine.	Integration Object
Name	Product line name.	String

Response Message Description: SWIProductLine_Delete

For a description of this response message, see [Table 1324](#).

Table 1324. Response Message Description: SWIProductLine_Delete

Node	Description	Type
ListofAdminProductLine	An instance of the integration object ListOfAdminProductLine.	Integration Object
Id	ID of the product line.	String
Description	Description of the product line.	String
Name	Name of the product line.	String
PrimaryPositionId	ID of the primary position.	String
PrimaryProductId	ID of the primary product.	String

SWIProductLine Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1325](#).

Table 1325. SWI Admin Product Line Service Object

Siebel Repository Name	Boundary Object Type	Class
SWI Product Line	Business Service	CSSEAIDataSyncService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1326](#).

Table 1326. SWI Admin Product Line Data Object

Siebel Repository Name	External Name
SWI Admin Product Line	SWI Admin Product Line

Example Package for SWIProductLine

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \SWIProductLine\SWIProductLine_request.xml
```

Response

See the following file to view the sample code:

```
... \SWIProductLine\SWIProductLine_response.xml
```

Interface Description (WSDL) for SWIProductLine

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \SWIProductLine\SWIProductLine.wsdl
```

SWIPromotionIntegration

Use this Web service to add or update product and pricing information for promotions.

SWIPromotionIntegration Operations

For a list of operations associated with this Web service, see [Table 1327](#).

Table 1327.SWIPromotionIntegration Operations

Name	Description
SWIPromotionUpsert	Creates a new promotion or updates an existing promotion.

Request Message Description: SWIPromotionUpsert

For a description of this request message, see [Table 1328](#).

Table 1328.Request Message Description: SWIPromotionUpsert

Node	Description	Type
SyncChild	Upsert operation behaves as Synchronize if SyncChild flag is set to Y. NOTE: The default value of this flag is N.	Boolean
SWIPromotionIntegrationIO	Required. An instance of the integration object SWIPromotionIntegration.	Integration Object
WorkspaceName	Workspace name.	String
WorkspaceReuseFlag	Flag which indicates whether a workspace is reused.	Boolean

Table 1328.Request Message Description: SWIPromotionUpsert

Node	Description	Type
ListOfSwiPromotionVbc	Container element for Promotion details which is an instance of the VBC SwiPromotion.	Integration Component
ActiveFlag	Flag which indicates whether a record is active.	Boolean
Name	Promotion name.	String
Organization	Organization name.	String
Type	Promotion type.	String
TrackAsAgreement	Flag which indicates whether a record is tracked as an agreement.	Boolean
TrackAsAsset	Flag which indicates whether a record is tracked as an asset.	Boolean
ShowInCatalog	Flag which indicates whether a record is shown in a catalog.	Boolean
ReleaseFlag	Flag which indicates whether a record is to be released.	Boolean
ListOfSwiPromotionProduct ComponentsVbc	Container element for Promotion Product Component details which is an instance of the VBC SwiPromotionProductComponents.	Integration Component
Default	Default value for product components.	Integer
Max	Maximum number of product components.	Integer
Min	Minimum number of product components.	Integer
ProductName	Product name.	String
Commitment	Flag which indicates whether a commitment has been made.	Boolean
DisconnectAction	The disconnect action, such as Prompt.	String
ApplyComponentChargeFlag	Flag which indicates whether a component charge is to be applied.	Boolean
GracePeriod	Grace period number.	Integer
GracePeriodUOM	Grace period unit of measure, such as days or weeks.	String
CommitmentPeriod	Period of commitment.	Integer
CommitmentPeriodUOM	Grace period unit of measure, such as days, month or years.	Integer

Table 1328.Request Message Description: SWIPromotionUpsert

Node	Description	Type
ProratePlanName	Name of the prorate plan.	String
TerminationCharge	Termination charge.	String
ListOfSwiPromotionPricingComponentsVbc	Container element for Promotion Pricing Component details which is an instance of the VBC SWIPromotionPricingComponents.	Integration Component
AdjustmentType	Adjustment type.	String
Value	Adjustment type value.	Integer
CurrencyCode	Currency code.	String
EndDate	Adjustment end date.	Date
ExchangeDate	Exchange date.	Date
ProductName	Product name.	String
ListOfSwiPromotionAggregateProductClassVbc	Container element for Promotion Aggregate Product Class details which is an instance of the VBC SwiPromotionAggregateProductClass.	Integration Component
ClassId	The class ID value.	String
ClassName	The class name.	String
Default	The default value.	Integer
Description	Description.	String.
DisconnectAction	Disconnect action.	String
Recommendable	Flag which indicates whether a product class can be recommended by users.	Boolean
Max	Maximum number.	Integer
Min	Minimum number.	Integer
Commitment	Flag which indicates whether there is a commitment.	Boolean
ListOfSwiPromotionAggregateProductClassDefaultProductsVbc	Container element for Promotion Aggregate Product Class Default Product details which is an instance of the VBC SwiPromotionAggregateProductClassDefaultProducts.	Integration Component
DefaultCardinality	The default cardinality.	Integer

Table 1328. Request Message Description: SWIPromotionUpsert

Node	Description	Type
ProductId	The product ID.	String
ProductName	The product name.	String
ListOfSwiPromotionAggregateProductLineVbc	Container element for Promotion Aggregate Product Line details which is an instance of the VBC SwiPromotionAggregateProductLine.	Integration Component
Default	Default value.	Integer
Description	Aggregate product line description.	String
Max	Maximum number.	Integer
Min	Minimum number.	Integer
ProductLine	The product line.	String
DisconnectAction	Disconnect action.	String
ProductLineId	Product line ID.	String
Commitment	Flag which indicates whether there is a commitment.	Boolean
ListOfSwiPromotionAggregateProductLineDefaultProductsVbc	Container element for Promotion Aggregate Product Line Default Products details which is an instance of the VBC SwiPromotionAggregateProductLineDefaultProducts.	Integration Component
DefaultCardinality	Default cardinality.	Integer
ProductId	Product ID.	String
ProductName	Product name.	String
SwiPromotionAggregateProductClassDefaultProductsVbc	Container element for Promotion Aggregate Product Class Default Product details which is an instance of the VBC SwiPromotionAggregateProductClassDefaultProducts.	Integration Component
DefaultCardinality	Default cardinality	Integer
ProductId	Product ID.	String
ProductName	Product name.	String

Table 1328. Request Message Description: SWIPromotionUpsert

Node	Description	Type
ListOfSwiPromotionAggregateProductLineMessagesVbc	Container element for Promotion Aggregate Product Line Message details which is an instance of the VBC SWI Promotion.	Integration Component
Description	Description.	String
LanguageCode	Language code.	String
ListOfSwiPromotionUpgradeAggregateProductLineVbc	Container element for Promotion Upgrade Aggregate Product Line details which is an instance of the VBC SwiPromotionUpgradeAggregateProduct Line.	Integration Component
DisplayCommitment	Flag which indicates whether to display the commitment.	Boolean
DisplayProratedCharge	Flag which indicates whether to display the prorated charge.	Boolean
Penalty	Penalty.	String
ProductLine	Product line.	String
ProratePlanName	Prorate Plan Name.	String
Reason	Commitment reason.	String
ListofSwiPromotionUpgradeAggregateProductClassVbc	Container element for Promotion Upgrade Aggregate Product Class details which is an instance of the VBC SwiPromotionUpgradeAggregateProduct Class.	Integration Component
DisplayCommitment	Flag which indicates whether to display the commitment.	Boolean
DisplayProratedCharge	Flag which indicates whether to display the prorated charge.	Boolean
Penalty	Penalty.	String
ProductClassName	Product class name.	String
ProratePlanName	Prorate plan name.	String
Reason	Reason.	String

Table 1328.Request Message Description: SWIPromotionUpsert

Node	Description	Type
ListofSwiPromotionUpgradeToAggregateProductLineVbc	Container element for Promotion Upgrade To Aggregate Product Line details which is an instance of the VBC SwiPromotionUpgradeToAggregateProduct Line.	Integration Component
DisplayCommitment	Flag which indicates whether to display the commitment.	Boolean
DisplayProratedCharge	Flag which indicates whether to display the prorated charge.	Boolean
Penalty	Penalty.	String
ProductLine	Product class name.	String
ProratePlanName	Prorate plan name.	String
Reason	Reason.	String
ListOfSwiPromotionUpgradeToAggregateProductClassVbc	Container element for Promotion Upgrade To Aggregate Product Class details which is an instance of the VBC SwiPromotionUpgradeToAggregateProduct Class.	Integration Component
DisplayCommitment	Flag which indicates whether to display the commitment.	Boolean
DisplayProratedCharge	Flag which indicates whether to display the prorated charge.	Boolean
Penalty	Penalty.	String
ProductClassName	Product class name.	String
ProratePlanName	Prorate plan name.	String
Reason	Reason.	String
ListOfSwiPromotionCharges_Credits Vbc	Container element for the Promotion Charge and Credit details which is an instance of the VBC SwiPromotionCharges_Credits.	Integration Component
Amount	Credit amount.	Integer
Type	Credit type.	String
ListOfSwiPromotionProductOverride Vbc	Container element for Promotion Product Override details which is an instance of the VBC SwiPromotionProductOverride.	Integration Component

Table 1328.Request Message Description: SWIPromotionUpsert

Node	Description	Type
ComponentPath	Component path.	String
PromotionName	Promotion name.	String
ApplyComponentChargeFlag	Flag which indicates whether to apply a component charge.	Boolean
GracePeriod	Grace period value.	Integer
GracePeriodUOM	Grace period unit of measure, such as days, weeks and so on.	String
CommitmentPeriod	Commitment period value.	Integer
CommitmentPeriodUOM	Commitment period unit of measure, such as weeks, years and so on.	String
ProratePlanName	Prorate plan name.	String
TerminationCharge	Termination charge.	Integer
DefaultCardinality	Default cardinality.	Integer
MaxCardinality	Optional. Maximum cardinality.	Integer
MinCardinality	Optional Minimum cardinality.	Integer
ListofSwiPromotionPricingOverride Vbc	Container element for Promotion Pricing Override details which is an instance of the VBC SwiPromotionPricingOverride.	Integration Component
AdjustmentType	Adjustment type.	String
AdjustmentValue	Adjustment value.	Integer
ComponentPath	Component path.	String
EndDate	End date.	Date
MaximumPrice	Maximum price.	Integer
MinimumPrice	Minimum price.	Integer
PromotionName	Promotion name.	String
StartDate	Start date.	Date

Response Message Description: SWIPromotionUpsert

For a description of this response message, see [Table 1329](#).

Table 1329. Response Message Description: SWIPromotionUpsert

Node	Description	Type
SWIPromotionIntegrationIO	Required. An instance of the integration object SWIPromotionIntegration.	Integration Object
Id	Promotion ID.	String
OverrideLockedFlag	Flag which indicates whether to override a locked record.	Boolean
ReleaseDate	Release date.	String
WorkspaceId	Workspace ID.	String
WorkspaceName	Workspace name.	String
WorkspaceReleaseFlag	Workspace release flag.	Boolean
WorkspaceReuseFlag	Workspace reuse flag.	Boolean
ListofSwiPromotionVbc	Container element for Promotion which is an instance of the VBC SwiPromotion.	Integration Component
Id	Promotion ID.	String
ActiveFlag	Flag which indicates whether to record is active or not.	Boolean
Name	Promotion name.	String
PrimaryOrganizationId	Primary organization ID.	String
PromotionId	Promotion ID.	String
Type	Promotion type.	String
VendorId	Vendor ID.	String
ReleaseFlag	Flag which indicates whether the promotion will be released.	String
Id	Promotion ID.	String
Max	Maximum value.	Integer
Min	Minimum value.	Integer
ProductId	Product ID.	String
ListOfSwiPromotionCharges_Credits Vbc	Container element for the Promotion Charge and Credit details which is an instance of the VBC SwiPromotionCharges_Credits.	Integration Component
Id	Promotion ID.	String
ChargeAmountCurrencyCode	Currency code for charge amount.	Integer

Table 1329. Response Message Description: SWIPromotionUpsert

Node	Description	Type
Period	Promotion period.	Date
Plan	Plan.	String
Type	Promotion type.	String
ListOfSwiPromotionPricingComponentsVbc	Container element for Promotion Pricing Component details which is an instance of the VBC SWIPromotionPricingComponents.	Integration Component
Id	Promotion ID.	String
AdjustmentType	Adjustment type.	String
Value	Value of promotion.	String
ProductId	Product ID.	String
ProductName	Product name.	String
ListOfSwiPromotionAggregateProductLineVbc	Container element for Promotion Aggregate Product Line details which is an instance of the VBC SwiPromotionAggregateProductLine.	Integration Component
Default	Default value.	Integer
Description	Promotion description.	String
DisconnectAction	Disconnect action.	String
Id	Promotion ID.	String
Recommendable	Flag which indicates whether a product class can be recommended by users.	Boolean
Max	Maximum number.	Integer
Min	Minimum number.	Integer
ProductLine	The product line.	String
ProductLineId	Product line ID.	String
Commitment	Flag which indicates whether there is a commitment.	Boolean

Table 1329. Response Message Description: SWIPromotionUpsert

Node	Description	Type
ListOfSwiPromotionAggregateProductLineDefaultProductsVbc	Container element for Promotion Aggregate Product Line Default Products details which is an instance of the VBC SwiPromotionAggregateProductLineDefault Products.	Integration Component
DefaultCardinality	Default cardinality.	Integer
Id	Promotion ID.	String
ProductId	Product ID.	String
ProductName	Product name.	String
SwiPromotionAggregateProductLineDefaultProductsVbc	Container element for Promotion Aggregate Product Line Default Products details which is an instance of the VBC SwiPromotionAggregateProductLineDefault Products.	Integration Component
DefaultCardinality	Default cardinality	Integer
Id	Promotion ID.	String
ProductId	Product ID.	String
ProductName	Product name.	String
ListOfSwiPromotionAggregateProductLineMessagesVbc	Container element for Promotion Aggregate Product Line Message details which is an instance of the VBC SWI Promotion.	Integration Component
Description	Description.	String
Id	Promotion ID.	String
LanguageCode	Language code.	String
ListOfSwiPromotionAggregateProductClassVbc	Container element for Promotion Aggregate Product Class details which is an instance of the VBC SwiPromotionAggregateProductClass.	Integration Component
ClassId	The class ID value.	String
ClassName	The class name.	String
Default	The default value.	Integer
Description	Description.	String

Table 1329. Response Message Description: SWIPromotionUpsert

Node	Description	Type
DisconnectAction	Disconnect action.	String
Id	Promotion ID.	String
Recommendable	Flag which indicates whether a product class can be recommended by users.	Boolean
Max	Maximum number.	Integer
Min	Minimum number.	Integer
Commitment	Flag which indicates whether there is a commitment.	Boolean
ListOfSwiPromotionAggregateProductClassDefaultProductsVbc	Container element for Promotion Aggregate Product Class Default Product details which is an instance of the VBC SwiPromotionAggregateProductClassDefault Products.	Integration Component
ClassId	Class ID.	String
ClassName	Class name.	String
Default	Default value.	String
Description	Class description.	String
DisconnectAction	Disconnect action.	String
Id	Promotion ID.	String
Recommendable	Flag which indicates whether a product class can be recommended by users.	Boolean
Max	Maximum number.	Integer
Min	Minimum number.	Integer
Commitment	Flag which indicates whether there is a commitment.	Boolean
ListOfSwiPromotionAggregateProductClassDefaultProductsVbc	Container element for Promotion Aggregate Product Class Default Product details which is an instance of the VBC SwiPromotionAggregateProductClassDefault Products.	Integration Component
DefaultCardinality	Default cardinality.	Integer
Id	Promotion ID.	String
ProductId	Product ID.	String

Table 1329. Response Message Description: SWIPromotionUpsert

Node	Description	Type
ProductName	Product name.	String
ListOfSwiPromotionUpgradeAggregateProductLineVbc	Container element for Promotion Upgrade Aggregate Product Line details which is an instance of the VBC SwiPromotionUpgradeAggregateProduct Line.	Integration Component
Id	Promotion ID.	String
CommitmentStart	Start of the commitment.	Date
Duration	Promotion duration.	String
ProductLineId	Product line ID.	String
ListOfSwiPromotionUpgradeAggregateProductClassVbc	Container element for Promotion Upgrade Aggregate Product Class details which is an instance of the VBC SwiPromotionUpgradeAggregateProduct Class.	Integration Component
Id	Promotion ID.	String
CommitmentStart	Start of commitment.	Date
Duration	Promotion duration.	String
ProductClassId	Product class ID.	String
ListOfSwiPromotionUpgradeToAggregateProductLineVbc	Container element for Promotion Upgrade To Aggregate Product Line details which is an instance of the VBC SwiPromotionUpgradeToAggregateProduct Line.	Integration Component
Id	Promotion ID.	String
CommitmentStart	Start of commitment.	Date
Duration	Promotion duration.	String
ProductLineId	Product class ID.	String

Table 1329. Response Message Description: SWIPromotionUpsert

Node	Description	Type
ListOfSwiPromotionUpgradeToAggregateProductClassVbc	Container element for Promotion Upgrade To Aggregate Product Class details which is an instance of the VBC SwiPromotionUpgradeToAggregateProduct Class.	Integration Component
Id	Promotion ID.	String
CommitmentStart	Start of commitment.	Date
Duration	Promotion duration.	String
ProductClassId	Product class ID.	String
ListofSwiPromotionPricingOverrideVbc	Container element for Promotion Pricing Override details which is an instance of the VBC SwiPromotionPricingOverride.	Integration Component
Id	Promotion ID.	String
PromotionName	Promotion name.	String
ListOfSwiPromotionProductOverrideVbc	Container element for Promotion Product Override details which is an instance of the VBC SwiPromotionProductOverride.	Integration Component
DefaultCardinality	Default cardinality.	Integer
MaxCardinality	Optional. Maximum cardinality.	Integer
MinCardinality	Optional Minimum cardinality.	Integer

SWIPromotionIntegration Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1330](#).

Table 1330. SWIPromotionIntegration Service Object

Siebel Repository Name	Boundary Object Type	Class
SWIPromotionImport	Business Service	CSSSWIPromWebSvc

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1331](#).

Table 1331.SWIPromotionIntegration Data Object

Siebel Repository Name	External Name
SWIPromotionIntegrationIO	SWI Promotion Integration
SWIISSPromotion	SWI ISS Promotion
SWIISSPromotionAggregateProductClass	SWI ISS Promotion Aggregate Product Class

Methods

For a description of the methods for this Web service, see [Table 1332](#).

Table 1332.SWIPromotionIntegration Methods

Operation	Method
SWIPromotionUpsert	Insert or Update

Example Package for SWIPromotionIntegration

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

...SWIPromotionIntegration\SWIPromotionIntegration_request.xml

The < ComponentPath/> XML tag supports the following two formats:

- Root Product||Relationship Name::Class/Product Name||Domain product Name:: Domain Product Name

or

- Root Product|:::Class/Product Name::Domain type||Domain product Name::Product

Response

See the following file to view the sample code:

...SWIPromotionIntegration\SWIPromotionIntegration_response.xml

Interface Description (WSDL)a for SWIPromotionIntegration

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

...SWIPromotionIntegration\SWIPromotionIntegration.wsdl

SWIQuoteUpsert

Use this Web service to upsert quote details

SWIQuoteUpsert Operations

For a list of operations associated with this Web service, see [Table 1333](#).

Table 1333.SWIQuoteUpsert Operations

Name	Description
SWIQuoteUpsert	Inserts or updates quote details.

Request Message Description: SWIQuoteUpsert

For a description of this request message, see [Table 1334](#).

Table 1334.Request Message Description: SWIQuoteUpsert

Node	Description	Type
StatusObject	Optional	String
SiebelMessage	Required	Integration Object
UTCCanonical	A value of Y means that all date-type fields in the payload are in UTC standard format.	String

Response Message Description: SWIQuoteUpsert

For a description of this response message, see [Table 1335](#).

Table 1335.Response Message Description: SWIQuoteUpsert

Node	Description	Type
SiebelMessage	Required	Integration Object

SWIQuoteUpsert Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1336](#).

Table 1336.SWIQuoteUpsert Service Object

Siebel Repository Name	Boundary Object Type	Class
SWIQuoteUpsert	Workflow	Not applicable

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1337](#).

Table 1337.SWIQuoteUpsert Data Object

Siebel Repository Name	External Name
SWIQuoteIO	PDS Simplified Order

SWISpecialRatingList

Use this Web service to send updated or modified special rating list details to the Oracle Communications Billing and Revenue Management application for synchronizing when a user clicks the Synchronize button in the Special Rating List applet.

SWISpecialRatingList Operations

For a list of operations associated with this Web service, see [Table 1338](#).

Table 1338.SWISpecialRatingList Operations

Name	Description
SyncSpecialRatingListItems	Synchronizes the active special rating items (for example, Phone number) with the external Oracle Communications Billing and Revenue Management application for the updated special rating list.

Request Message Description: SyncSpecialRatingListItems

This method is used to synchronize the special rating items. For a description of the request message, see [Table 1339](#).

Table 1339.Request Message Description: SyncSpecialRatingListItems

Node	Description	Type
ListOfSWISpecialRatingListIO	Required. An instance of the integration object SWISpecialRatingListIO.	Integration Object

SWISpecialRatingList Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1340](#).

Table 1340.SWISpecialRatingList Service Object

Name	Boundary Object Type	Class
SWI Special Rating - Synchronize Process	Workflow	Not Applicable

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1341](#).

Table 1341.SWISpecialRatingList Data Object

Siebel Repository Name	External Name
SWISpecialRatingListIO	SWI Special Rating List

Methods

For a description of the methods for this Web service, see [Table 1342](#).

Table 1342.SWISpecialRatingList Method

Operation	Method
SyncSpecialRatingListItems	SyncSpecialRatingListItems

SWISubmitOrder

Use this Web service to submit an order to the queue.

SWISubmitOrder Operations

For a list of operations associated with this Web service, see [Table 1343](#).

Table 1343.SWISubmitOrder Operations

Name	Description
process	Submits the order request into the Oracle Communications Billing and Revenue Management Advanced Queue (AQ) facility.

Request Message Description: process

For a description of this request message, see [Table 1344](#).

Table 1344.Request Message Description: process

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
SWISubmitOrderReqMsg:ListOfSWIOrderIO	Optional	Integration Object
siebel_transport_param:JMSPriority	Optional. Sets the priority for the order processing in the JMS queue.	

Response Message Description: process

There is no response message for this operation.

SWISubmitOrder Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1345](#).

Table 1345.SWISubmitOrder Service Objects

Name	Boundary Object Type	Class
SWISubmitOrder	Business Service	CSSWSOutboundDispatcher
SISOMBillingSubmitOrderWebService	Workflow	Not Applicable

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1346](#).

Table 1346.SWISubmitOrder Data Object

Siebel Repository Name	External Name
SWIOrderIO	PDS Simplified Order

Methods

For a description of the methods for this Web service, see [Table 1347](#).

Table 1347.SWISubmitOrder Method

Operation	Method
Process	Process

Interface Description (WSDL) for SWISubmitOrder

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

...WSDL\SWISubmitOrder.wsdl

SWISubmitOrder_o2c

Use this Web service to submit an order for the Order-to-Cash Process Integration Pack (O2C PIP) into the queue.

SWISubmitOrder_o2c Operations

For a list of operations associated with this Web service, see [Table 1348](#).

Table 1348.SWISubmitOrder_o2c Operations

Name	Description
process	Submits an order request into the Oracle Communications Billing and Revenue Management Advanced Queue (AQ) facility.

Request Message Description: process

For a description of this request message, see [Table 1349](#).

Table 1349.Request Message Description: process

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
SWISubmitOrder_o2cReqMsg:ListOfSWIOrderIO	Optional	Integration Object
siebel_transport_param:JMSPriority	Optional. Sets the priority of the order processing in the JMS queue.	String

Response Message Description: process

There is no response message with this operation.

SWISubmitOrder_o2c Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1350](#).

Table 1350.SWISubmitOrder_o2c Service Object

Siebel Repository Name	Boundary Object Type	Class
SWISendOrder	Workflow	Not applicable

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1351](#).

Table 1351.SWISubmitOrder_o2c Data Object

Siebel Repository Name	External Name
SWIOrderIO	PDS Simplified Order

Methods

For a description of the methods for this Web service, see [Table 1352](#).

Table 1352.SWISubmitOrder_o2c Methods

Operation	Method
process	process

SWISubmitQuote_o2c

Use this Web service to submit a quote for the Order-to-Cash Process Integration Pack (O2C PIP) into the queue.

SWISubmitQuote_o2c Operations

For a list of operations associated with this Web service, see [Table 1353](#).

Table 1353.SWISubmitQuote_o2c Operations

Name	Description
process	Submits a quote request into the Oracle Communications Billing and Revenue Management Advanced Queue (AQ) facility.

Request Message Description: process

For a description of this request message, see [Table 1354](#).

Table 1354.Request Message Description: process

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
SWISubmitQuote_o2cReqMsg:ListOfSWIQuoteIO	Optional	Integration Object

Response Message Description: process

There is no response message with this operation.

SWISubmitQuote_o2c Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1355](#).

Table 1355.SWISubmitQuote_o2c Service Object

Siebel Repository Name	Boundary Object Type	Class
SWISendQuote	Workflow	Not applicable

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1356](#).

Table 1356.SWISubmitQuote_o2c Data Object

Siebel Repository Name	External Name
SWIQuoteIO	PDS Simplified Order

Methods

For a description of the methods for this Web service, see [Table 1357](#).

Table 1357.SWISubmitQuote_o2c Methods

Operation	Method
process	process

SWISyncProduct

Use this outbound Web service to submit a product to the queue.

SWISyncProduct Operations

For a list of operations associated with this Web service, see [Table 1358](#).

Table 1358.SWISyncProduct Operations

Name	Description
SyncItemList	Submits the product information in the Siebel business application into the asynchronous queue of the third-party application

Request Message Description: SyncItemList

For a description of this request message, see [Table 1359](#).

Table 1359.Request Message Description: SyncItemList

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
SWISyncProductReqMsg: SyncItemList	Optional	Integration Object

Response Message Description: SyncItemList

Not applicable.

SWISyncProduct Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1360](#).

Table 1360.SWISyncProduct Service Object

Siebel Repository Name	Boundary Object Type	Class
SWISyncProduct	Business Service	CSSWSOutboundDispatcher
SWIExternalProductRequestWF	Workflow	Not applicable

Data Object (Integration Object)

For a description of the data object for this Web service, see [Table 1361](#).

Table 1361.SWISyncProduct Data Object

Siebel Repository Name	External Name
SWIAdminISSProductDefinitionIOSWI	Admin ISS Product Definition IO

Method

For a description of the method for this Web service, see [Table 1362](#).

Table 1362.SWISyncProduct Method

Operation	Method
SyncItemList	SyncItemList

SWITroubleTicket

Use this Web service to create trouble tickets for failed orders.

SWITroubleTicket Operations

For a list of operations associated with this Web service, see [Table 1363](#).

Table 1363.SWITroubleTicket Operations

Name	Description
SWITroubleTicketInsert	Creates a new trouble ticket.
SWITroubleTicketInsertOrUpdate	Inserts or updates a trouble ticket.
SWITroubleTicketQueryById	Queries for a trouble ticket by ID.
SWITroubleTicketUpdate	Updates a trouble ticket.

Request Message Description: SWITroubleTicketInsert

For a description of this request message, see [Table 1364](#).

Table 1364.Request Message Description: SWITroubleTicketInsert

Node	Description	Type
SWITroubleTicketIO	Required	Integration Object
Status	Optional	String

Response Message Description: SWITroubleTicketInsert

For a description of this response message, see [Table 1365](#).

Table 1365. Response Message Description: SWITroubleTicketInsert

Node	Description	Type
SWITroubleTicketIO	Required	Integration Object

Request Message Description: SWITroubleTicketInsertOrUpdate

For a description of this request message, see [Table 1366](#).

Table 1366. Request Message Description: SWITroubleTicketInsertOrUpdate

Node	Description	Type
SWITroubleTicketIO	Required	Integration Object
Status	Optional	String

Response Message Description: SWITroubleTicketInsertOrUpdate

For a description of this response message, see [Table 1367](#).

Table 1367. Response Message Description: SWITroubleTicketInsertOrUpdate

Node	Description	Type
SWITroubleTicketIO	Required	Integration Object

Request Message Description: SWITroubleTicketQueryById

For a description of this request message, see [Table 1368](#).

Table 1368. Request Message Description: SWITroubleTicketQueryById

Node	Description	Type
SWITroubleTicketIO	Optional	Integration Object
PrimaryRowId	Required	String

Response Message Description: SWITroubleTicketQueryById

For a description of this response message, see [Table 1369](#).

Table 1369. Response Message Description: SWITroubleTicketQueryById

Node	Description	Type
SWITroubleTicketIO	Optional	Integration Object

Request Message Description: SWITroubleTicketUpdate

For a description of this request message, see [Table 1370](#).

Table 1370.Request Message Description: SWITroubleTicketUpdate

Node	Description	Type
SWITroubleTicketIO	Required	Integration Object
Status	Optional	String

Response Message Description: SWITroubleTicketUpdate

For a description of this response message, see [Table 1371](#).

Table 1371.Response Message: SWITroubleTicketUpdate

Node	Description	Type
SWITroubleTicketIO	Required	Integration Object

SWITroubleTicket Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1372](#).

Table 1372.SWITroubleTicket Service Object

Name	Boundary Object Type	Class
SWI Trouble Ticket Service	Business Service	CSSEAIDataSyncService

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1373](#).

Table 1373.SWITroubleTicket Data Object

Siebel Repository Name	External Name
SWITroubleTicketIO	Service Request

Methods

For a description of the methods for this Web service, see [Table 1374](#).

Table 1374.SWITroubleTicket Methods

Operation	Method
Insert	Insert
InsertOrUpdate	InsertOrUpdate
QueryById	QueryById
Update	Update

SWI Update Order Line Item

Use this Web service to update the status of order line items for simple products, complex products, and nested service bundles in the Siebel CRM application when the status of the order line item changes in the billing application. The billing application makes this inbound Web service call to the Siebel CRM application to update the status of the order line item. A business service is made available in the Siebel CRM application to update the status field.

If the order line item contains a complex product or nested service bundle, then the Web service updates the statuses of the component products within that complex product or nested service bundle for the order line item ID that is passed to this Web service. If the order line item ID is the same as the root line item ID, then the Web service updates the statuses of the entire product hierarchy for the order.

The response message returns only an acknowledgement message and not data.

SWI Update Order Line Item Operations

For a list of operations associated with this Web service, see [Table 1375](#).

Table 1375.SWI Update Order Line Item Operations

Name	Description
UpdateLineItems	Updates the value of the field that is passed to it for order line items in simple products, complex products, and nested service bundles.

Request Message Description: UpdateLineItems

For a description of this request message, see [Table 1376](#).

Table 1376.Request Message Description: UpdateLineItems

Node	Description
FieldName1	The name of the field in the order line item to update.
FieldValue1	The new value of the field in the order line item to update.

Table 1376.Request Message Description: UpdateLineItems

Node	Description
RootLineItemId	The row ID of the root order in the order line item hierarchy.
OrderLineItemId	The row ID of the nested product in the order line item hierarchy.
UpdateSingleLineItem	The designation for an order with a single line item. If this node has a value of TRUE, then the order has a single line item.

SWI Update Order Line Item Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1377](#).

Table 1377.SWI Update Order Line Item Service Objects

Name	Boundary Object Type	Class (If Business Service)
CMU Order Line Item Update (For simple products)	Business Service	CSSEAIDataSyncService
SIS OM UpdateOrderItem (For complex products)	Workflow	Not applicable
SIS OM NSB Update Order Line (For nested service bundles)	Workflow	Not applicable

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1378](#).

Table 1378.SWI Update Order Line Item Data Object

Siebel Repository Name	External Name
Order Entry Line Item Update	Order Entry Line Item Update

Methods

For a description of the methods for this Web service, see [Table 1379](#).

Table 1379.SWI Update Order Line Item Methods

Operation	Method
UpdateLineItems	[BS: CMU Order Line Item Update].Update

Example Package for SWI Update Order Line Item

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \SWIUpdateOrderLineItem\SWIUpdateOrderLineItem.xml
```

Response

See the following file to view the sample code:

```
... \SWIUpdateOrderLineItem\SWIUpdateOrderLineItem.xml
```

Interface Description (WSDL) for SWI Update Order Line Item

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \SWIUpdateOrderLineItem\SWIUpdateOrderLineItem.wsdl
```

SyncCustomerSiebelEventAggregator

Use this outbound Web service to synchronize account, contact, address, billing profile, and statement profile details with an external system when any insert or update operation occurs for these corresponding entities in the Siebel database.

SyncCustomerSiebelEventAggregator Operations

For a list of operations associated with this Web service, see [Table 1380](#).

Table 1380. SyncCustomerSiebelEventAggregator operations

Operation	Description
aggregateaccountevent	Called when an account record is inserted or updated. This operation sends the updated or inserted account details along with its child details to the external system to synchronize the account.
aggregatecontactevent	Called when a contact record is inserted or updated. This operation sends the updated or inserted contact details along with its child details to the external system to synchronize the contact.

Table 1380.SyncCustomerSiebelEventAggregator operations

Operation	Description
aggregateadressevent	Called when an address record is inserted or updated. This operation sends the updated or inserted address details along with its child details to the external system to synchronize the address.
aggregatebpevent	Synchronizes the billing profile.
aggregatespevent	Synchronizes the statement profile.

Request Message Description: aggregateaccountevent

Sends inserted or updated account details from the Siebel database to an external system to synchronize the account with the participating integrated application.

For a description of this request message, see [Table 1381](#).

Table 1381.Request Message Description: aggregateaccountevent

Node	Description	Type
ListofSwicustomerpartyIO	An instance of the integration object ListofSwicustomerpartyIO.	Integration Object
AccountNumber	The number of the account.	String
AccountStatus	The status of the account that was updated.	String
AccountTypeCode	Account class.	String
Created	The creation date of the account.	Date
CurrencyCode	Account currency code.	String
DUNSNumber	Dun and Bradstreet data universal numbering system, number.	String
HomePage	URL for account’s homepage.	String
IntegrationId	Integration ID of account record.	String
Location	Location of the account.	String
MainFaxNumber	Main fax number of the account.	String
MainPhoneNumber	Main phone number of the account.	String
Name	Account name.	String
ParentAccountId	Account ID of the parent account.	String
PrimaryAddressId	Primary address of the account.	String
PrimaryBillingProfileId	The primary billing profile ID of the account.	String
PrimaryContactId	The primary contact ID for the account.	String
PrimaryOrganizationId	The primary organization ID for the account.	String

Table 1381. Request Message Description: aggregateaccountevent

Node	Description	Type
PrimaryShipToAddressId	The primary shipping address of the account.	String
RowId	The row ID in the Siebel database table.	String
Type	The type of account.	String
ListOfCutAddress	The address details of the account.	Integration Component
ListOfCutAddressCopy	The address details of the billing profile of the account.	Integration Component
ListOfComExemptionsProfile	The exemption profile details of the account.	Integration Component
ListOfComInvoiceProfile	The billing profile details of the account.	Integration Component
ListOfComStatementProfile	The statement profile details of the account.	Integration Component
ListOfContact	The contact details for the account.	Integration Component
ListOfContactQuery	The contact associated with the billing profile of the account.	Integration Component
ListOfInternalDivision	The internal division details of the account.	Integration Component
ListOfPersonalAddress	The addresses associated with the contacts of the account.	Integration Component

Response Message Description: aggregateaccountevent

This Web service is asynchronous. There is no response message.

Request Message Description: aggregatecontactevent

For a description of this request message, see [Table 1382](#).

Table 1382. Request Message Description: aggregatecontactevent

Node	Description	Type
ListOfSwicontactio	The contact details.	Integration Object
Alias	The contact alias.	String
CellularPhone	The mobile phone number of the contact.	String
ConsumerLink	The Consumer Link of the contact.	String
ContactPersonTitle	The title of the contact.	String

Table 1382. Request Message Description: aggregatecontactevent

Node	Description	Type
CurrencyCode	The currency code for billing profile.	String
DateofBirth	The contact's date of birth.	String
EmailAddress	The email address of the contact.	String
FaxPhone	The contact's fax number.	String
FirstName	The contact's first name.	String
HomePhone	The contact's home phone number.	String
IntegrationId	The Integration ID of the contact record.	String
JobTitle	The contact's job title.	String
LastName	The last name of the contact.	String
MM	The salutation for the contact.	String
Gender	The gender of the contact.	String
MaritalStatus	The marital status of the contact.	String
MiddleName	The middle name of the contact.	String
MotherMaidenName	The maiden name of the contact's mother.	String
PrimaryOrganizationId	The primary organization ID of the contact.	String
PrimaryPersonalAddressId	The primary address ID of the contact.	String
RowId	The row ID in the Siebel database table.	String
SocialSecurityNumber	The Social Security number of the contact.	String
Status	The status of the contact record.	String
WorkPhone	The work phone number of the contact.	String
ListofAccount	The account details for the contact.	Integration Component
ListofComInvoiceProfile	The billing profiles of the contact.	Integration Component
ListofFmLocation	The fleet management (FM) locations of the contact.	Integration Component
ListofOrganization	The organizations of the contact.	Integration Component
ListofPersonalAddress	The addresses of the contact.	Integration Component
ListofUcmContactPrivacy	The Universal Customer Master (UCM) contact privacy details.	Integration Component

Response Message Description: aggregatecontactevent

This Web service is asynchronous. There is no response message.

Request Message Description: aggregateaddressevent

Sends inserted or updated address details from the Siebel database to an external system to synchronize the address with the participating integrated application.

For a description of this request message, see [Table 1383](#).

Table 1383. Request Message Description: aggregateaddressevent

Node	Description	Type
ListOfSwiaddressIO	The address details.	Integration Object
AddressName	The address name.	String
BillAddressFlag	Indicates whether the account is billable.	String
City	The city name.	String
County	The county name.	String
Country	The country name.	String
DisableDataCleansing	Disables the flag for data cleansing.	String
EmailAddress	The email address.	String
IntegrationId	The integration ID of the address record.	String
MainAddressFlag	Indicates the main address.	String
PostalCode	The postal code of the address record.	String
Province	The province in the address record, if this value is valid.	String
RowId	The row ID in the Siebel database table.	String
ShipAddressFlag	Indicates the ship-to address.	String
State	The state of the address record.	String
StreetAddress	The street address of address record.	String
StreetAddress2	The secondary street address of the address record, if necessary.	String
ListOfAccount	The account details associated with the address.	Integration Component
ListofComInvoiceProfile	The billing profile associated with the address.	Integration Component
ListOfFmLocation	The fleet management locations associated with the address.	Integration Component
ListOfContact	The contacts associated with the address.	Integration Component

Response Message Description: aggregateaddressevent

This Web service is asynchronous. There is no response message.

Request Message Description: aggregatebpevent

Sends the inserted or updated billing profile from the Siebel database to an external system to synchronize the billing profile with the participating integrated application.

For a description of this request message, see [Table 1384](#).

Table 1384. Request Message Description: aggregatebpevent

Node	Description	Type
ListOfSwibillingprofileIO	The billing profile details.	Integration Object
AccountId	The account ID of the billing profile.	String
AddressId	The address ID of the billing profile.	String
BankAccountName	The bank account name associated with the billing profile.	String
BankAccountNumber	The bank account number associated with the billing profile.	String
BankAccountType	The bank account type associated with the billing profile.	String
BankAuthorizationflag	The Bank Authorization flag associated with the billing profile.	Boolean
BankBranch	The branch details of the bank.	String
BankLanguageCode	The language code of the bank.	String
BankLanguageId	The language ID of the bank.	String
BankName	The name of the bank.	String
BillAverage	The average of the bill.	String
BillCycle	The cycle of the bill.	String
BillCycleDay	The cycle day of the bill.	String
BillFrequency	The frequency of the bill.	String
BillSequence	The sequence of the bill.	String
BillSource	The source of the bill.	String
BillVendorId	The Bill Vendor ID.	ID
BudgetBillingFlag	The Budget Billing flag.	Boolean
CPNIDate	The Customer Proprietary Network Information (CPNI) date.	String

Table 1384. Request Message Description: aggregatebpevent

Node	Description	Type
CPNIFlag	The Customer Proprietary Network Information (CPNI) flag.	Boolean
CollectionsFlag	The Collections flag.	Boolean
ContactId	The contact ID.	ID
CreditCardBlockFlag	Indicates whether to block the credit card.	Boolean
CreditCardBlockReason	The reason for the credit card block.	String
CreditCardCategory	The category of the credit card.	String
CreditCardExpirationDate	The expiration date of the credit card.	String
CreditCardName	The name on the credit card.	String
CreditCardNumber	The number of the credit card.	String
CreditCardNumberEncryptkey Reference	The encryption key reference of the credit card number.	String
CreditCardSecurityCode	The credit card security code.	String
CreditCardType	The credit card type.	String
CreditCardVerificationNumber	The credit card verification number.	String
CreditCardVerificationNumberEncryptionKey	The encryption key reference of the credit card verification number.	String
DaysToCash	The Days to Cash.	Integer
EmailBillTo	The email ID.	String
BillingProfileId	The billing profile ID.	ID
InterestatInvoiceFlag	The Interest at Invoice flag.	Boolean
LastBillAmount	The last bill amount.	String
LastBillDate	The last bill date.	String
MediaType	The media type.	String
BillType	The bill type for the billing profile.	String
ExtraCopies	The number of copies to be sent.	Integer
BillingProfileName	The billing profile name.	String
NoPayFormFlag	The No Pay Form flag.	Boolean
NumberofManualInvoices	The number of manual invoices.	Integer
PaymentMethod	The payment method.	String
ReasonforManualOutsource	The reason for the manual outsource.	String

Table 1384. Request Message Description: aggregatebpevent

Node	Description	Type
StatementFlag	The Statement flag to distinguish the billing profile from the statement profile.	Boolean
RepeatDebtorFlag	The Repeat Debtor flag.	Boolean
RoutingNumber	The routing number of the bank.	String
StandingOrderFlag	The Standing Order flag.	Boolean
Status	The status of the billing profile.	String
YearlyAdvancePaymentFlag	The Yearly Advance Payment flag.	Flag
ListOfContact	The contacts associated with the billing profile.	Integration Component
ListOfCutAddress	The addresses associated with the billing profile.	Integration Component

Response Message Description: aggregatebpevent

This Web service is asynchronous. There is no response message.

Request Message Description: aggregatespevent

Sends an inserted or updated statement profile from the Siebel database to an external application to synchronize the statement profile with the participating integrated application.

For a description of this request message, see [Table 1385](#).

Table 1385. Request Message Description: aggregatespevent

Node	Description	Type
ListOfSwistatementprofileIO	The statement profile details.	Integration Object
ContactFirstName	The contact's first name.	String
ContactLastName	The contact's last name.	String
StreetAddress	The contact's street address.	String
EmailBillTo	The contact's email address.	String
LanguageCode	The language code for the statement profile.	String
ContactId	The contact's ID.	ID
MediaType	The media type for the statement profile.	String
BillType	The bill type for the statement profile.	String
ExtraCopies	The number of copies to be sent.	Integer
ContactFaxPhone	The contact's fax number.	String

Table 1385.Request Message Description: aggregatesevent

Node	Description	Type
ContactWorkPhone	The contact's work phone number.	String
StatementProfileId	The ID for the statement profile.	ID
AddressId	The address ID for the contact's selected address.	ID
AccountId	The account ID for the statement profile.	ID
StatementFlag	The statement flag to distinguish the billing profile from the statement profile.	Boolean
City	The city for the contact's address.	String
State	The state for the contact's address.	String
Country	The country for the contact's address.	String
ZipCode	The ZIP code for the contact's address.	String

Response Message Description: aggregatesevent

This Web service is asynchronous. There is no response message.

SyncCustomerSiebelEventAggregator Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1386](#).

Table 1386.SyncCustomerSiebelEventAggregator Service Object

Siebel Repository Name	Boundary Object Type	Class
SyncCustomerSiebelEventAggregator	Business Service	CSSWSOutboundDispatcher

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1387](#).

Table 1387.SyncCustomerSiebelEventAggregator Data Object

Siebel Repository Name	External Name
SWICustomerPartyIO	Account
SWIContactIO	SWI Contact
SWIAddressIO	SWI CUT Address
Fault	Fault

Table 1387.SyncCustomerSiebelEventAggregator Data Object

Siebel Repository Name	External Name
SWIStatementProfileIO	Com Statement Profile
SWIBillingProfileIO	CMU - Com Invoice Profile

Interface Description (WSDL) for SyncCustomerSiebelEventAggregator

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \SyncCustomerSiebelEventAggregator\SyncCustomerSiebelEventAggregator.wsdl

TNT History Oppty Insert

Use this Web service with Siebel Hospitality to import data into history records.

TNT History Oppty Insert Operations

For a list of operations associated with this Web service, see [Table 1388](#).

Table 1388.TNT History Oppty Insert Operations

Name	Description
Insert	If a History record with the same unique key (Opportunity ID, defined in the integration object) as the input object exists, the operation will error out. If there is no duplicate record, then a new record in the Siebel database is created based on the input object.
Upsert	If an object with the same unique key (Opportunity ID, defined in the integration object) as the input object exists, the existing record is updated with the specified input object. If no duplicate record exists, a new object is created in the Siebel database based on the input object.

TNT History Oppty Insert Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1389](#).

Table 1389.TNT History Oppty Insert Service Object

Name	Boundary Object Type	Class
TNT History Oppty Insert	Business Service	CSSEAISiebelAdapterService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1390](#).

Table 1390.TNT History Oppty Insert Data Object

Siebel Repository Name	External Name
TNT History Opportunity IO	TNT History Opportunity

Methods

For a description of the methods for this Web service, see [Table 1391](#).

Table 1391.TNT History Oppty Insert Methods

Operation	Method
Insert	If a History record with the same unique key (Opportunity ID, defined in the integration object) as the input object exists, error out. Otherwise, the operations creates a new record in the Siebel database based on the input object.
Upsert	If an object with the same unique key (Opportunity ID, defined in the integration object) as the input object exists, updates the existing record with the specified input object. Otherwise, the operations creates a new object in the Siebel database based on the input object.

Interface Description (WSDL) for TNT History Oppty Insert

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

See the following file to view the WSDL:

```

... \TNT History Oppty Insert \TNT_Histories.wsd1
... \TNT History Oppty Insert \TNT_Histories.xsd
    
```

UInbox Contact Item

UInbox Contact Item is a Web service and business service generated to load Contact Inbox Items. These items can be filtered based any fields in the business component. For example, either approved or rejected Inbox items can be loaded by setting appropriate fields in the integration object while invoking the Web service. Page size needs to be specified to load the required number of items while invoking Web service. Based on the requirements Task Owner ID or Task Owner Login, Active Flag, Action and Context fields need to be set while invoking the Web service.

UInbox Contact Item Operations

For a list of operations associated with this Web service, see [Table 1392](#).

Table 1392.UInbox Contact Item Operations

Name	Description
UInboxContactItemQueryPage	Uses the QueryPage method to query data in the Siebel database one page at a time.
Query Page	Uses the QueryPage method to query data in the Siebel database one page at a time.
Init	Action is initialized.
Execute	Action is executed.

Request Message Description: UInboxContactItemQueryPage

For a description of this request message, see [Table 1393](#).

Table 1393.Request Message Description: UInboxContactItemQueryPage

Node	Description	Type
ExecutionMode	The mode in which the query is to be performed.	String
LOVLanguageMode	LIC or LDC.	String
NamedSearchSpec	Search specification of the query.	String
PickListName	Name of the picklist (if any).	String

Response Message Description: UInboxContactItemQueryPage

For a description of this response message, see [Table 1394](#).

Table 1394.Response Message Description: UInboxContactItemQueryPage

Node	Description	Type
SiebelMessageOut	Output argument.	Integration Object

To Specify Parameters While Invoking UInbox Contact Item

Use the following procedure to specify parameters while invoking the UInbox Contact Item Web service.

Specifying parameters while invoking Web service

- 1 Run the WSDL file through a proxy generator.

This creates a C# class that must be modified to construct Input Integration Objects.

For performance reasons, Page size can also be specified here.

Following is the sample client side code showing how page size and other input parameters can be specified.

```
AccountQueryPageMSO_Input input = new AccountQueryPageMSO_Input ();
input.ViewMode = "All";
input.PageSize = "10";
input.StartRowNum = "0";

input.ListOfAccount = new Account[1];

input.ListOfAccount[0] = new Account ();
input.ListOfAccount[0].Name = "MngoTestAccount";
input.ListOfAccount[0].Location = "";
proxy.AccountQueryPageMSO (input);
```

- 2 Records can be filtered based on logged in resource and context by specifying these values in Input Integration Objects.

Possible Performance and Scalability Issues

The volume of Inbox data loaded by the Web service for a specific user and context can be extremely huge depending on implementations. There will be performance issues if it is all retrieved together. This issue can be overcome by specifying the page size during each call.

Possible Deployment Issues

Authentication URL can be changed during deployment to supply changed information such as user, password and so on. These changes need to be done in the WSDL file.

Error Conditions

All error conditions will be handled by Web services framework.

UInbox Contact Item Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1395](#).

Table 1395.UInbox Contact Item Service Object

Name	Boundary Object Type	Class
UInbox Contact Item	Not applicable	CSSEAIUIDataService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1396](#).

Table 1396.UInbox Contact Item Data Object

Siebel Repository Name	External Name
UInboxContactItem	UInbox Items

Example Package for UInbox Contact Item

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \UInboxContactItem\UInboxContactItem_request.xml
```

Response

See the following file to view the sample code:

```
... \UInboxContactItem\Response.xml
```

Interface Description (WSDL) for UInbox Contact Item

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \UInboxContactItem\UInboxContactItem.wsdl
```

UnbilledUsageSiebelCommsReqABCS

Use this Web service to query for unbilled usage details in the external Oracle Communications Billing and Revenue Management application that will be displayed in a billing profile on the billing user interface.

UnbilledUsageSiebelCommsReqABCS Operations

For a list of operations associated with this Web service, see [Table 1397](#).

Table 1397. UnbilledUsageSiebelCommsReqABCS Operations

Name	Description
QueryUnbilledUsage	Queries unbilled usage for the billing profile in the Siebel Communications Billing view.
QueryResourceBalance	Queries resource balance details for the billing profile in the Siebel Communications Billing view.
SearchEventDetails	Searches for unbilled event details for the billing profile in the Siebel Communications Billing view.
QueryEventDetails	Queries unbilled event details for the billing profile in the Siebel Communications Billing view.

Request Message Description: QueryUnbilledUsage

For a description of this request message, see [Table 1398](#).

Table 1398. Request Message: QueryUnbilledUsage

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
QueryUnbilledUsageReqMsg:ListOfCmuRequestBillingProfileIo	Optional	Integration Object

Response Message Description: QueryUnbilledUsage

For a description of this response message, see [Table 1399](#).

Table 1399. Response Message Description: QueryUnbilledUsage

Node	Description	Type
QueryUnbilledUsageRespMsg:ListOfCmuResponseUnbilledUsageIo	Optional	Integration Object

Request Message Description: QueryResourceBalance

For a description of this request message, see [Table 1400](#).

Table 1400.Request Message Description: QueryResourceBalance

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
QueryResourceBalanceReqMsg:ListOfCmuRequestUnbilledBalanceDetailsIo	Optional	Integration Object

Response Message Description: QueryResourceBalance

For a description of this response message, see [Table 1401](#).

Table 1401.Response Message Description: QueryResourceBalance

Node	Description	Type
QueryResourceBalanceRespMsg:ListOfCmuResponseUnbilledBalanceDetailsIo	Optional	Integration Object

Request Message Description: SearchEventDetails

For a description of this request message, see [Table 1402](#).

Table 1402.Request Message Description: SearchEventDetails

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
SearchEventDetailsReqMsg:ListOfCmuRequestUnbilledDetailsSearchIo	Optional	Integration Object

Response Message Description: SearchEventDetails

For a description of this response message, see [Table 1403](#).

Table 1403.Response Message Description: SearchEventDetails

Node	Description	Type
SearchEventDetailsRespMsg:ListOfCmuResponseUnbilledDetailsIo	Optional	Integration Object

Request Message Description: QueryEventDetails

For a description of this request message, see [Table 1404](#).

Table 1404.Request Message Description: QueryEventDetails

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
QueryEventDetailsReqMsg:ListOfCmuRequestUnbilledDetailsIo	Optional	Integration Object

Response Message Description: QueryEventDetails

For a description of this response message, see [Table 1405](#).

Table 1405.Response Message Description: QueryEventDetails

Node	Description	Type
QueryEventDetailsRespMsg:ListOfCmuResponseUnbilledDetailsIo	Optional	Integration Object

UnbilledUsageSiebelCommsReqABCS Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1406](#).

Table 1406.UnbilledUsageSiebelCommsReqABCS Service Object

Name	Boundary Object Type	Class
UnbilledUsageSiebelCommsReqABCS	Business Service	CSSWSOutboundDispatcher

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1407](#).

Table 1407.UnbilledUsageSiebelCommsReqABCS Data Objects

Siebel Repository Name	External Name
CMU Response Unbilled Details IO	Account
CMU Request Unbilled Details IO	Account
CMU Request Unbilled Balance Details IO	Account
CMU Response Unbilled Balance Details IO	Account
CMU Request Billing Profile IO	Account

Table 1407. UnbilledUsageSiebelCommsReqABCS Data Objects

Siebel Repository Name	External Name
CMU Response Unbilled Usage IO	Account
CMU Request Unbilled Details Search IO	Account
CMU Response Unbilled Details IO	Account

Methods

For a description of the methods for this Web service, see [Table 1408](#).

Table 1408. UnbilledUsageSiebelCommsReqABCS

Operation	Method
QueryUnbilledUsage	QueryUnbilledUsage
QueryResourceBalance	QueryResourceBalance
SearchEventDetails	SearchEventDetails
QueryEventDetails	QueryEventDetails

Example Package for UnbilledUsageSiebelCommsReqABCS

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

... \UnbilledUsageSiebelCommsReqABCS \Request.xml

Response

See the following file to view the sample code:

... \UnbilledUsageSiebelCommsReqABCS \Response.xml

Interface Description (WSDL) for UnbilledUsageSiebelCommsReqABCS

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

... \UnbilledUsageSiebelCommsReqABCS \WSDL

Universal Inbox

Universal Inbox is an existing business service providing functionality to create, update Inbox items or owner, invoke actions, and so on. This can be modified to include methods to invoke Approve and Reject Actions that will be deployed as a Web service.

Universal Inbox Operations

For a list of operations associated with this Web service, see [Table 1409](#).

Table 1409. Universal Inbox Operations

Name	Description
UniversalInboxCallAction	Executes the action registered for a specific Inbox Item type.

Request Message Description: UniversalInboxCallAction

For a description of this request message, see [Table 1410](#).

Table 1410. Request Message Description: UniversalInboxCallAction

Node	Description	Type
InboxItemId	InboxItemId	String
ActionLIC	ActionLIC	String
InboxTypeName	InboxTypeName	String
OwnerId	OwnerId	String
ObjectId	ObjectId	String

Response Message Description: UniversalInboxCallAction

For a description of this response message, see [Table 1411](#).

Table 1411. Response Message Description: UniversalInboxCallAction

Node	Description	Type
Status	Call status.	String
Error message	Error message returned, if any.	String

This operation will return the following messages:

- Errors such as *post-approval action not configured*.
- User-friendly error message, for example, when the same inbox item is concurrently updated by two Siebel Self-Service users. Messages such as "This has already been approved by a different user" appear if the action has been approved. If the action has been rejected, then the message: *this has already been rejected by a different user* appears.

- Returning the actual error message, if any, from the workflow that is being invoked. Since the Self-Service workflow is invoked synchronously, all error messages will be propagated.
- CallAction business service method will detect and return error messages raised by the Action business service. Web service Infrastructure will detect that the CallAction business service method has returned an error code and create a SOAP fault.

Invalid input conditions

InboxItemId and ActionName are required input parameters to execute the action. Comments is an optional parameter.

Processing errors

Errors occurring during workflow execution and so on will be handled by Web services framework and the error extracted will be sent as SOAP fault.

Universal Inbox Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1412](#).

Table 1412. Universal Inbox Service Object

Node	Description	Type
Universal Inbox	Not applicable	CSSUInboxSvc

Data Object (Integration Object)

Since all Input and Output parameters are Strings, Integration Object is not required.

Example Package for Universal Inbox

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \UniversalInbox\UniversalInbox_request.xml
```

Response

See the following file to view the sample code:

```
...\UniversalInbox\Universal_Inbox_response.xml
```

Interface Description (WSDL) for Universal Inbox

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
...\UniversalInbox\UniversalInbox.wsdl
```

UpdateCreditAlertSiebelCommsReqABCImpl

Use this Web service to update the credit alert status from Siebel CRM to the external Oracle Communications Billing and Revenue Management application.

UpdateCreditAlertSiebelCommsReqABCImpl Operations

For a list of operations associated with this Web service, see [Table 1413](#).

Table 1413.UpdateCreditAlertSiebelCommsReqABCImpl Operations

Name	Description
UpdateCreditAlert	Updates the credit alert.

Request Message Description: UpdateCreditAlert

For a description of this request message, see [Table 1414](#).

Table 1414.Request Message Description: UpdateCreditAlert

Node	Description	Type
CustomHeaderContext	Optional	Hierarchy
UpdateCreditAlertReqMsg:UpdateCreditAlert	Optional	Integration Object

Request Message Description: UpdateCreditAlert

There is no response message for this Web service.

UpdateCreditAlertSiebelCommsReqABCImpl Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1415](#).

Table 1415.UpdateCreditAlertSiebelCommsReqABCServiceImpl Service Object

Name	Boundary Object Type	Class
UpdateCreditAlertSiebelCommsReqABCServiceImpl Service	Business Service	CSSWSOutboundDispatcher

Data Object (Integration Object)

For a description of the data objects for this Web service, see [Table 1416](#).

Table 1416.UpdateCreditAlertSiebelCommsReqABCServiceImpl Data Object

Siebel Repository Name	External Name
SWICUTCreditManagementIO	CUT Credit Management

Methods

For a description of the methods for this Web service, see [Table 1417](#).

Table 1417.UpdateCreditAlertSiebelCommsReqABCServiceImpl

Operation	Method
UpdateCreditAlert	UpdateCreditAlert

UpdateCustomerSiebelJMSProducer

Use this Web service to synchronize the data between the Siebel CRM and the external billing application for details relating to accounts, addresses, contacts, and billing profiles. Because this Web service uses an asynchronous call, a response message does not apply.

UpdateCustomerSiebelJMSProducer Operations

For a list of operations associated with this Web service, see [Table 1418](#).

Table 1418.UpdateCustomerSiebelJMSProducer Operations

Operation Name	Description
UpdateCustomerParty	Synchronizes account detail between the Siebel CRM application and the billing application.
UpdateCustomerPartyAddress	Synchronizes address detail for an account between the Siebel CRM application and the billing application.

Table 1418.UpdateCustomerSiebelJMSProducer Operations

Operation Name	Description
UpdateCustomerPartyContact	Synchronizes contact detail for an account between the Siebel CRM application and the billing application.
UpdateCustomerPartyBillProfile	Synchronizes billing profile detail for an account between Oracle’s Siebel CRM application and the billing application.

Request Message Description: UpdateCustomerParty

For a description of this request message, see [Table 1419](#).

Table 1419.Request Message Description: UpdateCustomerParty

Node	Description
Account	The details of the account.
CutAddress	The details of the address for an account.
Contact	The details of the contact for an account.

Request Message Description: UpdateCustomerPartyAddress

For a description of this request message, see [Table 1420](#).

Table 1420.Response Message Description: UpdateCustomerPartyAddress

Node	Description
Account	The details of the account.
CutAddress	The details of the address for an account.
ComInvoiceProfile	The details of the billing profile for an account.

Request Message Description: UpdateCustomerPartyContact

For a description of this request message, see [Table 1421](#).

Table 1421.Request Message Description: UpdateCustomerPartyContact

Node	Description
Account	The details of the account.
Contact	The details of the contact for an account.
ComInvoiceProfile	The details of the billing profile for an account.

Request Message Description: UpdateCustomerPartyBillProfile

For a description of this request message, see [Table 1422](#).

Table 1422.Request Message Description: UpdateCustomerPartyBillProfile

Node	Description
BillingProfileCutAddress	The details of the address for a billing profile.
BillingProfileContact	The details of the contact for a billing profile.
ComInvoiceProfile	The details of the billing profile for an account.

UpdateCustomerSiebelJMSProducer Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1423](#).

Table 1423.UpdateCustomerSiebelJMSProducer Service Object

Name	Boundary Object Type	Class (If Business Service)
UpdateCustomerSiebelJMSProducer	Business Service	CSSWSOutboundDispatcher

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1424](#).

Table 1424.UpdateCustomerSiebelJMSProducer Data Object

Siebel Repository Name	External Name
CMU AccSync Account Io	CMU - Account
CMU AccSync Address Io	CMU - Address
CMU AccSync Contact Io	CMU - Contact
CMU AccSync Billing Profile Io	CMU - Com Invoice Profile

Methods

For a description of methods for this Web service, see [Table 1425](#).

Table 1425.UpdateCustomerSiebelJMSProducer Methods

Operation	Method
UpdateCustomerParty	[BS: UpdateCustomerSiebelJMSProducer].UpdateCustomerParty
UpdateCustomerPartyAddress	[BS: UpdateCustomerSiebelJMSProducer].UpdateCustomerPartyAddress
UpdateCustomerPartyBillProfile	[BS: UpdateCustomerSiebelJMSProducer].UpdateCustomerPartyBillProfile
UpdateCustomerPartyContact	[BS: UpdateCustomerSiebelJMSProducer].UpdateCustomerPartyContact

Example Package for UpdateCustomerSiebelJMSProducer

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
... \UpdateCustomerSiebelJMSProducer\CmuAccSyncAccount.xml
```

Response

Because this Web service uses an asynchronous call, a response message does not apply.

Interface Description (WSDL) for UpdateCustomerSiebelJMSProducer

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
... \UpdateCustomerSiebelJMSProducer\UpdateCustomerSiebelJMSProducer.xml
```

WC_PickList_Payment_Profile_BS

This Web service is used for creating, updating, deleting, or listing of payment wallet with payment methods.

This Web service makes available the Query and Execute methods in the WC_PickList_Payment_Profile_BS business service as Web service operations.

WC_PickList_Payment_Profile_BS Operations

For a list of operations associated with this Web service, see [Table 1426](#).

Table 1426.WC_PickList_Payment_Profile_BS Operations

Name	Description
WC_PickList_Payment_Profile_BSQueryPage	Performs query operations based on the query criteria.set on WC_PickList_Payment_Profile_IO integration object as the input. This operation is used to query the payment related details like the payment profile details and the account or contact information for which the payment wallet belongs to.
WC_PickList_Payment_Profile_BSExecute	Perform various operations such as creating, updating, or deleting of payment wallet with payment methods on the WC_PickList_Payment_Profile_IO integration object as the input.

Request Message Description: WC_PickList_Payment_Profile_BSQueryPage

Based on the query criteria set on the integration object. Payment related details such as payment profile details, account, and contact information can be queried. For a description of this request message, see [Table 1427](#).

Table 1427.Request Message Description: WC_PickList_Payment_Profile_BSQueryPage

Node	Description	Type
WC_PickList_Payment_Profile_BSQueryPage_Input	The container element for the QueryPage Operation request.The method arguments are Payment integration object, Language Mode (value is LDC) and viewMode (All).	Integration Object

Response Message Description: WC_PickList_Payment_Profile_BSQueryPage

For a description of this response message, see [Table 1428](#).

Table 1428.Response Message Description: WC_PickList_Payment_Profile_BSQueryPage

Node	Description	Type
WC_PickList_Payment_Profile_BSQueryPage_Output	The method arguments are Payment Integration Object, Language Mode (the value which is LDC) and viewMode (the value which is All).	Integration Object

Request Message Description: WC_PickList_Payment_Profile_BSExecute

Based on the query criteria set, creating, editing, or deleting operations on a wallet can be performed. For a description of this request message, see [Table 1429](#).

Table 1429.Request Message Description: WC_PickList_Payment_Profile_BSExecute

Node	Description	Type
WC_PickList_Payment_Profile_BSExecute_Input	The method arguments are Payment Integration Object, Language Mode (value is LDC), and viewMode (All).	Integration Object

Response Message Description: WC_PickList_Payment_Profile_BSExecute

For a description of this response message, see [Table 1430](#).

Table 1430.Response Message Description: WC_PickList_Payment_Profile_BSExecute

Node	Description	Type
WC_PickList_Payment_Profile_BSExecute_Output	The retrieved data for the update operation performed which could be the creating, editing, or deletion of a payment wallet.	Integration Object

WC_PickList_Payment_Profile_BS Application Interface

This Web service makes available the EAI UI business service WC_PickList_Payment_Profile_BS, which provides update and query operations on WC_PickList_Payment_Profile_IO integration object. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1431](#).

Table 1431.WC_PickList_Payment_Profile_BS Web service

Name	Boundary Object Type	Class
WC_PickList_Payment_Profile_BS	Integration Object	CSSEAIUIDataService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1432](#).

Table 1432.WC_PickList_Payment_Profile_BS Web service

Siebel Repository Name	External Name
WC_PickList_Payment_Profile_IO	Payment Profile

Example Package for WC_PickList_Payment_Profile_BS

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request

See the following file to view the sample code:

```
...\WC_PickList_Payment_Profile_BS\WC_PickList_Payment_Profile_BS_request.xml
```

Response

See the following file to view the sample code:

```
...\WC_PickList_Payment_Profile_BS\WC_PickList_Payment_Profile_BS_response.xml
```

Interface Description (WSDL) for WC_PickList_Payment_Profile_BS

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

```
...\WC_PickList_Payment_Profile_BS\WC_PickList_Payment_Profile_BS.wsdl
```

WebMarketing

NOTE: This version of the WebMarketing Web service is available only for implementations of Siebel CRM version 8.1 and later. To use the WebMarketing Web service with Siebel CRM version 8.0, see version 8.0 of *Siebel CRM Web Services Reference*.

WebMarketing Operations

For a list of operations associated with this Web service, see [Table 1433](#).

Table 1433.WebMarketing Operations

Name	Description
EmailMarketingForwardToFriend	Forwards campaign details to a list of forwardees.
EmailMarketingUpdateJobStatus	Updates the job status of the task submitted for sending email.
UpdateCampaignRecipient	Updates the information of a campaign recipient.
CheckModuleLicense	Checks whether a particular module is licensed.

Request Message Description: EmailMarketingForwardToFriend

Calls Email Marketing - Forward to Friend to forward the emails. For a description of this request message, see [Table 1434](#).

Table 1434.Request Message Description: EmailMarketingForwardToFriend

Node	Description	Type
Account Id	Account ID of the forwarder of the email.	String
Campaign Id	The campaign ID of the campaign for which the information is being forwarded.	String
Forwardee Collection	List of forwardees.	Integration Object
Forwarder Camp Con Id	Campaign contact ID of the forwarder.	String
Forwarder Contact Id	Contact ID of the forwarder.	String
Forwarder Message	Message that the forwarder emails.	String
Forwarder Prospect Id	The prospect ID of the forwarder.	String
Offer Id	ID of the offer for which the email is being sent.	String
Response Type	The type of response.	String

Response Message Description: EmailMarketingForwardToFriend

For a description of this response message, see [Table 1435](#).

Table 1435.Response Message Description: EmailMarketingForwardToFriend

Node	Description	Type
Dummy	Error code values are OK or NOTOK.	String

Request Message Description: EmailMarketingUpdateJobStatus

This operation is called by Boldfish when a createMailing job is done. It updates the status in the marketing system task table. For a description of this request message, see [Table 1436](#).

Table 1436.Request Message Description: EmailMarketingUpdateJobStatus

Node	Description	Type
BatchNumber	Batch number of the job.	String
ErrorCode	Error code (if any) that needs to be passed for the job.	String
OfferId	The current offer.	String
OfferName	The name of the offer.	String
TaskId	Task ID.	String
WaveId	The campaign wave ID.	String

Response Message Description: EmailMarketingUpdateJobStatus

For a description of this response message, see [Table 1437](#).

Table 1437. Response Message Description: EmailMarketingUpdateJobStatus

Node	Description	Type
Dummy	Error code values are OK or NOTOK.	String

Request Message Description: UpdateCampaignRecipient

Calls EAI Siebel Adapter service to update campaign recipients. For a description of this request message, see [Table 1438](#).

Table 1438. Request Message Description: UpdateCampaignRecipient

Node	Description	Type
CampaignRecipientMsgIn	The campaign recipient information that needs to be updated.	Integration Object
LOVLanguageMode	The language mode.	String

Response Message Description: UpdateCampaignRecipient

For a description of this response message, see [Table 1439](#).

Table 1439. Response Message Description: UpdateCampaignRecipient

Node	Description	Type
CampaignRecipientMsgOut	The updated campaign recipient information.	Integration Object

Request Message Description: CheckModuleLicense

Calls Mktg List Export Service service to check module license and returns a value of Y (OK) or N (NOTOK) as the output. For a description of this request message, see [Table 1440](#).

Table 1440. Request Message Description: CheckModuleLicense

Node	Description	Type
ModuleName	The module name which needs to be checked.	String

Response Message Description: CheckModuleLicense

For a description of this response message, see [Table 1441](#).

Table 1441. Response Message Description: CheckModuleLicense

Node	Description	Type
IsModuleLicensed	Values are Y or N which indicates whether the module licensed or not.	String

WebMarketing Application Interface

This topic describes the application objects called by this Web service. For more information on application implementation, refer to your application development documentation on Oracle Technology Network.

Service Object (Business Service or Workflow)

For a description of the service objects for this Web service, see [Table 1442](#).

Table 1442.WebMarketing Service Objects

Name	Boundary Object Type	Class
Email Marketing - Forward to Friend	Workflow	Not applicable.
Email Marketing - Update Status	Workflow	Not applicable.
Mktg System Task Service	Business Service	CSSSystemTaskService
Server Requests	Business Service	CSSSrmService
EAI Siebel Adapter	Business Service	CSSEAISiebelAdapterService
Mktg List Export Service	Business Service	CSSListExportService

Data Object (Integration Object)

For a description of data objects for this Web service, see [Table 1443](#).

Table 1443.WebMarketing Data Objects

Siebel Repository Name	External Name
Marketing Email Forwarder	Forwarder Collection
Marketing Campaign Recipient	CampaignRecipientMsgIn
Marketing Campaign Recipient	CampaignRecipientMsgOut

Example Package for WebMarketing

To view an example of messages for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

Request (EmailMarketingForwardToFriend)

See the following file to view the sample code:

```
...\webMarketing\EmailMktgFwdToFriend_request.xml
```

Response (EmailMarketingForwardToFriend)

See the following file to view the sample code:

...\WebMarketing\EmailMktgFwdToFriend_response.xml

Request (EmailMarketingUpdateJobStatus)

See the following file to view the sample code:

...\WebMarketing\EmailMarketingUpdateJobStatus_request.xml

Response (EmailMarketingUpdateJobStatus)

See the following file to view the sample code:

...\WebMarketing\EmailMarketingUpdateJobStatus_request.xml

Request (UpdateCampaignRecipient)

See the following file to view the sample code:

...\WebMarketing\UpdateCampaignRecipient_request.xml

Response (UpdateCampaignRecipient)

See the following file to view the sample code:

...\WebMarketing\UpdateCampaignRecipient_response.xml

Request (CheckModuleLicense)

See the following file to view the sample code:

...\WebMarketing\CheckModuleLicense_request.xml

Response (CheckModuleLicense)

See the following file to view the sample code:

...\WebMarketing\CheckModuleLicense_response.xml

Interface Description (WSDL) for WebMarketing

To view the interface description for this Web service, navigate to the documentation library for Siebel Business Applications on Oracle Technology Network, and click the Related Files link next to the link for *Siebel CRM Web Services Reference* to access a zip file. Extract the files in the zip file.

See the following file to view the WSDL:

...\WebMarketing\webMarketing.wsdl

Index

A

- ABOWebService, Web service** 46
 - application interface 52
 - example package, schema 53
 - operations 47
 - Account, Web service** 54
 - application interface 55
 - example package, schema 56
 - operations 54
 - AccountBalanceSiebelCommsReqABCS, Web service**
 - application interface 59
 - example package, schema 60
 - operations 57
 - AdjustmentSiebelCommsReqABCS, Web service**
 - application interface 62
 - operations 61
 - AssetManagementComplex, Web service** 63
 - application interface 66
 - example package, schema 67
 - operations 63
- ## C
- CalculateShippingChargeSalesOrderSiebelReqABCSImpl, Web service**
 - application interface 68
 - operations 68
 - CatalogWebService, Web service** 69
 - application interface 73
 - operations 70
 - CheckATPSalesOrderSiebelReqABCSImpl, Web service** 74
 - application interface 75
 - example package, schema 75
 - operations 74
 - ClinicalSubject, Web service** 76
 - application interface 78
 - example package, schema 79
 - operations 76
 - CMU Account Query, Web service** 79
 - application interface 80
 - example package, schema 80
 - operations 79
 - CMU Account Update, Web service** 81

- application interface 82
- example package, schema 82
- operations 81

ConfiguratorUserLangSiebelAdapter, Web service 83

- application interface 84
- operations 83

Contact, Web service 85

- application interface 86
- example package, schema 86
- operations 85

CreateLeads, Web service 87

- application interface 88
- example package, schema 89
- operations 87

CreditCheckSalesOrderSiebelReqABCSImpl, Web service 90

- application interface 91
- example package, schema 91
- operations 90

F

FetchAccountSiebelReqABCSImpl, Web service 92

- application interface 94
- example package, schema 94
- operations 92

FetchContactSiebelReqABCSImpl, Web service 95

- application interface 97
- operations 95

FS Asset Warranty Service, Web service 98

- application interface 99
- example package, schema 100
- operations 98

G

GetCampaigns, Web service 100

- application interface 101
- example package, schema 102
- operations 100

GetMktgWebSurvey, Web service 102

- application interface 103
- example package, schema 104
- operations 103

I**InvoiceSiebelCommsReqABCS, Web service** 104

application interface 107
 example package, schema 108
 operations 104

ISS Price List Item WS, Web service 109

application interface 110
 example package, schema 111
 operations 109

ISS Web Commerce Export Attributes, Web service 112

application interface 113
 example package, schema 114
 operations 112

ISS Web Commerce Export Class, Web service 114

application interface 115
 example package, schema 116
 operations 114

ISS Web Commerce Export Content, Web service 117

application interface 119
 example package, schema 119
 operations 117

ISS Web Commerce Export Error, Web service 120

application interface 122
 example package, schema 123
 operations 120

ISS Web Commerce Export Price Lists, Web service 124

application interface 125
 example package, schema 126
 operations 124

ISS Web Commerce Export Recommended Products, Web service 127

application interface 128
 example package, schema 129
 operations 127

ISS Web Commerce Export Volume Discounts, Web service 130

application interface 131
 example package, schema 132
 operations 130

L**LeadProcessingService, Web service** 132

application interface 135
 example package, schema 136
 operations 133

LeadService, Web service 137

application interface 140

example package, schema 141
 operations 137

List, Web service 142

application interface 144
 example package, schema 144
 operations 143

ListMgmtProspect, Web service 145

example package, schema 146
 operations 145

LoyaltyAccrualService, Web service 147

example package, schema 150
 operations 147

LoyaltyBatchEnrollment, Web service 151

example package, schema 156
 operations 152

LoyaltyImportBusinessService, Web service 157

example package, schema 158
 operations 157

LoyaltyMemberService, Web service 158

example package, schema 170
 operations 159

LoyaltyRedemptionService, Web service 171

example package, schema 183
 operations 171

LoyaltyVoucherService, Web service 186

example package, schema 187
 operations 186

LS Clinical CRF Tracking Interface Service, Web service 188

application interface 197
 example package, schema 198
 operations 188

LS Clinical Protocol Site Interface Service, Web service 199

application interface 215
 example package, schema 216
 operations 199

LS Clinical Subject Information Interface Service, Web service 217

application interface 231
 example package, schema 232
 operations 217

LSSGOP_Account, Web service 233, 235

operations 233

LSSGOP_AccountAddress, Web service 236

application interface 238
 operations 236

LSSGOP_Activity, Web service 238

application interface 240
 operations 239

LSSGOP_ActivityContact, Web service 241

application interface 243

- operations 241
- LSSGOP_CatalogCategory, Web service** 244
 - application interface 246
 - operations 244
- LSSGOP_Contact, Web service** 247
 - application interface 249
 - operations 247
- LSSGOP_ContactAccount, Web service** 250
 - application interface 252
 - operations 250
- LSSGOP_ContactAddress, Web service** 253
 - application interface 255
 - operations 253
- LSSGOP_ContactBestTime, Web service** 256
 - application interface 258
 - operations 256
- LSSGOP_ContactLicense, Web service** 259
 - application interface 261
 - operations 259
- LSSGOP_CurrentUser, Web service**
 - application interface 262
 - operations 262
- LSSGOP_LanguageLOV, Web service** 263
 - application interface 264
 - operations 263
- LSSGOP_Literature, Web service** 264
 - application interface 267
 - operations 264
- LSSGOP_Literature_ALL, Web service** 267
 - application interface 270
 - operations 267
- LSSGOP_LiteratureCatalog, Web service** 270
 - application interface 273
 - operations 270
- LSSGOP_MessagePlan, Web service** 273
 - application interface 276
 - operations 273
- LSSGOP_MessagePlan_ALL, Web service** 277
 - application interface 280
 - operations 277
- LSSGOP_MessagePlanCatalog, Web service** 280
 - application interface 283
 - operations 280
- LSSGOP_MessageResponse, Web service** 283
 - application interface 286
 - operations 283
- LSSGOP_ModificationTrackingPurge, Web service** 349
 - application interface 350
 - operations 349
- LSSGOP_MsgPlanItem, Web service** 286
 - application interface 289
 - operations 287
- LSSGOP_MsgPlanItem_ALL, Web service** 289
 - application interface 292
 - operations 290
- LSSGOP_MsgPlanItemRelation, Web service** 292
 - application interface 295
 - operations 293
- LSSGOP_MsgPlanItemRelation_ALL, Web service** 295
 - application interface 297
 - operations 295
- LSSGOP_PersonalList, Web service** 298
 - application interface 300
 - operations 298
- LSSGOP_PositionContactAddress, Web service** 301
 - application interface 303
 - operations 301
- LSSGOP_Product, Web service** 304
 - application interface 305
 - operations 304
- LSSGOP_ProductIndication, Web service** 305
 - application interface 306
 - operations 306
- LSSGOP_ProductsDetailed, Web service** 307
 - application interface 309
 - operations 307
- LSSGOP_PromotionalItemsDropped, Web service** 310
 - application interface 313
 - operations 310
- LSSGOP_RelatedAccount, Web service** 313
 - application interface 316
 - operations 314
- LSSGOP_RelatedContact, Web service** 316
 - application interface 319
 - operations 317
- LSSGOP_RelatedLiterature, Web service** 319
 - application interface 322
 - operations 320
- LSSGOP_RetailObjective, Web service** 322
 - application interface 325
 - operations 322
- LSSGOP_Revenue, Web service** 326
 - application interface 328
 - operations 326
- LSSGOP_SampleDisclaimer, Web**

- service** 329
 - application interface 331
 - operations 329
- LSSGOP_SampleDropped, Web service** 332
 - application interface 334
 - operations 332
- LSSGOP_SampleInventory, Web service** 335
 - application interface 337
 - operations 335
- LSSGOP_SampleTransaction, Web service** 338
 - application interface 340
 - operations 338
- LSSGOP_Signature, Web service** 341
 - application interface 343
 - operations 341
- LSSGOP_TransactionItem, Web service** 344
 - application interface 347
 - operations 344

- M**
- MatchAccountSiebelReqABCServiceImpl, Web service** 350
 - application interface 351
 - operations 351
- MatchContactSiebelReqABCServiceImpl, Web service** 352
 - application interface 353
 - operations 353
- MktgDeduplicationService, Web service** 354
 - application interface 357
 - example package, schema 358
 - operations 354
- MktgImportService, Web service** 359
 - application objects 360
 - example package, schema 360
 - operations 359
- ModificationTracking, Web service** 347
 - application interface 348
 - operations 348

- N**
- NetworkOrderEntry, Web service** 361
 - application interface 361
 - operations 361

- O**
- OrderDetailWebService, Web service** 363
 - application interface 364
 - example package, schema 364
 - operations 363
- OrderWebService, Web service** 441
 - application interface 445
 - operations 442

- P**
- PaymentAuthorizationSalesOrderSiebelReqABCServiceImpl, Web service** 365
 - application interface 366
 - operations 365
- PaymentSiebelCommsReqABCS, Web service** 367
 - application interface 370
 - example package, schema 371
 - operations 367
- PDSOrderHeader, Web service** 372
 - example package, schema 372
 - operations 372
- PriceListsWS, Web service** 373
 - example package, schema 374
 - operations 373
- Primary Web services** 36
- ProcessSalesOrderSiebelJMSProducer, Web service** 374
 - application interface 375
 - example package, schema 375
 - operations 374
- Product Configurator Web Service for Orders, Web service** 391
 - application interface 405
 - example package, schema 406
 - operations 391
- Product Configurator Web Service, Web service** 376
 - application interface 389
 - example package, schema 390
 - operations 376
- Product Import, Web service** 406
 - application interface 408
 - example package 413
 - message schema for 413
 - operations 407
- Product Offer, Web service** 413
 - application interface 420
 - example package, schema 420
 - operations 414
- ProductSearchService, Web service** 422
 - application interface 424
 - example package, schema 425
 - operations 422
- Promotion Asset, Web service**
 - example package, schema 430
- PromotionAssetWebService, Web service**
 - application interface 429
- PromotionWebService, Web service** 430

application interface 434
 example package, schema 435
 operations 430

Q

QueryTransportationSalesOrderItineraryList SiebelReqABCImpl, Web service 435

application interface 436
 operations 436

QuoteCheckOutWebService, Web service 437

example package, schema 438
 operations 437

QuoteDetailWebService, Web service 439

example package, schema 441
 operations 439

QuoteWebService, Web service 441

application interface 445
 example package, schema 446
 operations 442

QuotingWebService, Web service 446

application interface 448
 example package, schema 449
 operations 447

R

Response, Web service 449

example package, schema 451
 operations 449

RetrieveAttachmentService, Web service 452

application interface 454
 example package, schema 454
 operations 452

RTD_NBA Integration Service, Web service

application interface 460
 example package, schema 461

S

SCOAExportWS, Web service 462

application interface 463
 example package, schema 463
 operations 462

searchSolution, Web service 464

application interface 465
 example package, schema 466
 operations 464

SelfServiceAccount, Web service 467

application objects 472
 example package, schema 473
 operations 467

SelfServiceAccountRootPath, Web

service 473

application interface 475
 example package, schema 476
 operations 474

SelfServiceAllAccountsList, Web service 476

application interface 480
 example package, schema 480
 operations 477

SelfServiceContact, Web service 481

application interface 488
 example package, schema 489
 operations 481

SelfServicePaymentHistory, Web service 490

operations 490

SelfServicePostLoginProcess, Web service 492

application interface 495
 example package, schema 496
 operations 492
 P_mode request parameter 492

SelfServiceRegistration, Web service 496

application interface 508
 enroll operation, business services called
 by 497
 example package, schema 508
 operations 497
 P_mode request parameter 497

SelfServiceResponsibility, Web service 510

application interface 511
 example package, schema 512
 operations 510

SelfServiceSmtplibEmail, Web service 512

application interface 514
 example package, schema 514
 operations 512

SelfServiceTemplateEmail, Web service 515

application interface 516
 example package, schema 517
 operations 515

SelfServiceTimeZone, Web service 517

application interface 518
 example package, schema 519
 operations 518

SelfServiceUser, Web service 519

application interface 522
 example package, schema 523
 operations 520

SelfServiceWebSite, Web service 523

application interface 525
 example package, schema 525
 operations 524

ServiceRequest, Web service 526

- application interface 530
- example package, schema 531
- operations 526
- SessionAccessWS, Web service** 531
 - application interface 532
 - example package, schema 532
 - operations 531
- SFA_Activity_BS, Web service** 533
 - application interface 534
 - example package, schema 534
 - operations 533
- Siebel Web Service, modeling** 26
 - exposing business service as Web service 26
 - exposing workflow as Web service 28
- Siebel Web Service, process of making available**
 - assembling the services 25
 - determining which objects to make available 24
- Siebel Web service, process of making available** 24
- Siebel Web Services**
 - authentication and performance 29
- Simple Access Protocol (SOAP), about** 19
- SWI LS Clinical Payments Inbound, Web service** 608
 - application interface 608
 - example package, schema 609
 - operations 608
- SWI LS Medical Product Issue Create Inbox Item Inbound, Web service** 640
 - application interface 641
 - example package, schema 641
 - operations 640
- SWI LS Medical Update Product Issue Inbound, Web service** 642
 - application interface 642
 - example package, schema 643
 - operations 642
- SWI Price List IO, Web service** 648
 - application interface 651
 - example package, schema 652
 - operations 648
- SWIAdjustmentStatusUpdate, Web service**
 - application interface 535
 - example package, schema 536
 - operations 535
- SWIAdminISSAttributeDefnIO, Web service**
 - application interface 538
 - operations 537
- SWIAdminISSClassDefinitionIO, Web service** 538
 - application interface 539
 - operations 538
- SWIAssetManagement, Web service** 540
 - application interface 542
 - example package, schema 542
 - operations 540
- SWICreateAdjustment, Web service** 550
 - application interface 551
 - operations 550
- SWIISSPriceListItemIO, Web service** 652
 - application interface 655
 - operations 653
- SWILocationServices, Web service** 559
 - application interface 560
 - operations 559
- SWILocationSync, Web service** 561
 - application interface 562
 - operations 561
- SWILSClinicalCreateSiteVisitGeoLocation, Web service** 565
 - application interface 566
 - example package, schema 566
 - operations 565
- SWILSClinicalGetEmployees, Web service** 567
 - application interface 570
 - example package, schema 570
 - operations 567
- SWILSClinicalGetSiteContacts, Web service** 571
 - application interface 575
 - example package, schema 575
 - operations 571
- SWILSClinicalGetSiteSnapshot, Web service** 576
 - application interface 577
 - example package, schema 577
 - operations 576
- SWILSClinicalGetSmartScriptDetails, Web service** 578
 - application interface 578
 - example package, schema 579
 - operations 578
- SWILSClinicalGetStateModelService, Web service** 580
 - application interface 582
 - example package, schema 583
 - operations 580
- SWILSClinicalGetSubjectVisitDetails, Web service** 584
 - application interface 588
 - example package, schema 588
 - operations 584
- SWILSClinicalInsertEmployees, Web service** 589
 - application interface 590

- example package, schema 590
 - operations 589
 - SWILSClinicalListOfValues, Web service** 591
 - application interface 594
 - example package, schema 595
 - operations 591
 - SWILSClinicalProtocolSiteGetSites, Web service** 596
 - application interface 601
 - example package, schema 602
 - operations 596
 - SWILSClinicalQueryProtocolSite_SiteVisits, Web service** 602
 - application interface 606
 - example package, schema 607
 - operations 602
 - SWILSClinicalTripReportInterfaceService, Web service** 609
 - application interface 636
 - example package, schema 637
 - operations 610
 - SWILSClinicalTripReportTemplates, Web service** 638
 - application interface 639
 - example package, schema 639
 - operations 638
 - SWIOrderUpsert, Web service** 646
 - application interface 647
 - operations 646
 - SWIProductAttributeImport, Web service** 657
 - application interface 658
 - example package, schema 658
 - operations 657
 - SWIProductClassImport, Web service** 660
 - application interface 660
 - example package, schema 661
 - operations 659
 - SWIProductImport, Web service** 666
 - example package, schema 666
 - SWIProductLine, Web service** 667
 - application interface 678
 - example package, schema 678
 - operations 667
 - SWIPromotionIntegration, Web service** 679
 - application interface 691
 - example package, schema 692
 - operations 679
 - SWIQuoteUpsert, Web service** 693
 - application interface 693
 - operations 693
 - SWISpecialRatingList, Web service** 694
 - application interface 695
 - operations 694
 - SWISubmitOrder, Web service** 696
 - application interface 696
 - operations 695
 - SWISubmitOrder_o2c, Web service** 697
 - application interface 698
 - operations 697
 - SWISubmitQuote_o2c, Web service** 698
 - application interface 699
 - operations 698
 - SWISyncProduct, Web service** 700
 - application interface 700
 - operations 700
 - SWITroubleTicket, Web service** 701
 - application interface 703
 - operations 701
- ## T
- TNT History Oppty Insert, Web service** 715
 - application interface 715
 - example package, schema 716
 - operations 715
- ## U
- UInbox Contact Item, Web service** 717
 - application interface 719
 - example package, schema 719
 - operations 717
 - parameters, specifying 718
 - UnbilledUsageSiebelCommsReqABCS, Web service** 722
 - application interface 722
 - operations 720
 - Universal Inbox, Web service** 724
 - application interface 725
 - example package, schema 725
 - operations 724
 - UpdateCreditAlertSiebelCommsReqABCServiceImpl, Web service** 726
 - application interface 726
 - operations 726
 - UpdateCustomerSiebelJMSProducer** 727
 - described 727
 - example package for 730
 - message schema for 730
- ## W
- WC_Picklist_Payment_Profile_BS, Web service** 730
 - application interface 732
 - example package, schema 733
 - operations 731
- ## Web services

- about 17
 - as server-side service 18
 - business services 22
 - core technologies 18
 - development cycle 19
 - documentation 20
 - enabling Siebel applications with 17
 - inbound, outbound 20
 - integration objects 21
 - Siebel architecture 24
 - Siebel support 20
 - Web Services Deployment Wizard, using 29**
 - Web Services Description Language (WSDL),**
 - about 18**
 - Web services, core technologies**
 - SOAP 19
 - WSDL 18
 - XML, XML schema 19
 - WebMarketing, Web service 733**
 - application interface 736
 - example package, schema 736
 - operations 733
- X**
- XML, XML Schema, about 19**