

Oracle® Revenue Management and Billing

Version 2.4.0.0.0

Batch Server Administration Guide

Revision 2.0

E59946-01

March, 2015

ORACLE®

Oracle Revenue Management and Billing Batch Server Administration Guide

E59946-01

Copyright Notice

Copyright © 2015, Oracle and/or its affiliates. All rights reserved.

Trademark Notice

Oracle and Java are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

License Restrictions Warranty/Consequential Damages Disclaimer

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure, and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or de-compilation of this software, unless required by law for interoperability, is prohibited.

Warranty Disclaimer

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

Restricted Rights Notice

If this software or related documentation is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT RIGHTS

Oracle programs, including any operating system, integrated software, any programs installed on the hardware and/or documentation delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware and/or documentation shall be subject to license terms and restrictions applicable to the programs. No other rights are granted to the U.S. Government.

Hazardous Applications Notice

This software is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure the safe use of this software. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software in dangerous applications.

Third Party Content, Products, and Services Disclaimer

This software and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third party content, products, or services.

Preface

About This Document

This document helps you to understand the concepts required while configuring and working with the batch component in Oracle Revenue Management and Billing. You must refer to this document after going through the *Oracle Revenue Management and Billing Server Administration Guide*.

Intended Audience

This document is intended for the following audience:

- System and Database Administrators
- Consulting Team
- Implementation Team

Organization of the Document

The information in this document is organized into the following sections:

Section No.	Section Name	Description
Section 1	Batch Architecture	Explains the difference between foreground and background processing. It also lists the components required during the background processing.
Section 2	Concepts	Explains the different types of predefined background processes. It also explains how to create a batch control and how to configure the batch component.
Section 3	Monitoring Background Processes	Describes the methods used for monitoring the background processing (batch).
Section 4	Interactive Submission (SPLBATCH)	Explains how to submit interactive batches. It also lists the limitations of interactive batches.
Section 5	Online Submission	Explains how to submit a batch job through the user interface. It also explains the concepts related to online batch daemon.
Section 6	External Scheduler Submission	Explains how to configure and execute batch jobs through external scheduler. It also lists and describes utilities that allow external schedulers (or a command line) to establish a JVM to run batch processes and then submit batch process to that JVM.
Section 7	Miscellaneous Operations	Lists and describes the common activities that are applicable to batch processing.

Section No.	Section Name	Description
Section 8	Batch Configuration Parameters Edit	Explains how to configure various properties of the batch component, such as batch cluster, threadpoolworker, and so on, using the Batch Edit utility.

Related Documents

You can refer to the following documents for more information:

Document	Description
<i>Oracle Revenue Management and Billing Version 2.4.0.0.0 Release Notes</i>	Provides a brief description about the new features and enhancements made in this release. It also highlights the bug fixes and known issues in this release.
<i>Oracle Revenue Management and Billing Server Administration Guide</i>	Describes the Oracle Revenue Management and Billing architecture. It also explains how to configure, deploy, and monitor web and business application servers.

You can also refer to the following artifacts on [My Oracle Support](#) using the respective part number:

- *Oracle Coherence Documentation (Part Number E15357)*

Contents

1.	Batch Architecture	1
1.1	Background Processing and the Architecture	2
2.	Concepts	3
2.1	Process Types	3
2.1.1	Process What's Ready Processes	3
2.1.2	Extract Processes	3
2.1.3	Ad-hoc Processes	3
2.1.4	Monitor Processes	3
2.1.5	Conversion Processes	4
2.1.6	Object Validation Processes	4
2.1.7	To Do Processes	4
2.1.8	Archive and Purge Processes	5
2.1.9	Configuration Lab Processes	5
2.1.10	Interface Processes	5
2.2	Batch Controls	5
2.2.1	Viewing Batch Controls Using the Application Viewer	8
2.2.2	Adding your own Batch Controls	9
2.3	Standard Parameters	9
2.3.1	Explanation of Timeout and Commit Interval	11
2.3.2	Explanation of Thread Limit and Thread Number	11
2.3.3	Explanation of Restart and Rerun	12
2.4	Timed Batch Processes	13
2.5	Common Configuration Files	14
2.5.1	eOBatch.properties	15
2.5.2	spl.properties - Product Configuration Settings	16
2.5.3	hibernate.properties - Database Connectivity Properties	17
2.5.4	log4j.properties - Logging Configuration	19
2.5.5	coherence-cache-config.xml	20
2.5.6	tangasol-coherence-override.xml	20
2.6	Configuration Process	23
2.7	Submission Methods	24
3.	Monitoring Background Processes	25
3.1	Batch Run Tree	25
3.2	Using SQL Queries to Monitor Background Processes	27
3.3	Monitoring using JMX classes	27
3.3.1	Jconsole	27
3.3.2	Mbeans	28

3.3.3	BatchCluster MBean	28
3.3.4	Threadpools Mbean.....	30
3.3.5	Members MBean	31
3.3.6	ClusterNode Mbean.....	32
3.3.7	BatchThread Mbeans.....	33
3.3.8	Adding Custom JMX Information.....	35
3.3.9	Cancelling Batch Processes Using JMX	36
3.3.10	jmxbatchclient[.sh] - JMX batch command line	36
4.	Interactive Submission (SPLBATCH).....	39
4.1	Anatomy of an Interactive Submission.....	39
4.2	Return Codes	41
4.3	Limitations of the Interactive Submission Method	41
5.	Online Submission	43
5.1	Using Online Submission	44
5.2	Online Batch Daemon.....	49
5.2.1	Guidelines for using the Batch Server/Batch Scheduler Daemon	51
5.2.2	Logging using the Batch Server/Scheduler Daemon	51
5.2.3	Configuring JMX with the Batch Server/Scheduler Daemon.....	52
5.3	submitbatch - Command based daemon	52
6.	External Scheduler Submission.....	53
6.1	Concepts	53
6.2	threadpoolworker[.sh] Utility.....	53
6.2.1	threadpoolworker and F1_TSPACE_ENTRY	55
6.2.2	threadpoolworker.properties configuration file	55
6.2.3	Multi-cast or Uni-cast	56
6.2.4	Well Known Addresses	57
6.2.5	threadpoolworker[.sh] command line options	58
6.2.6	tpwlog4j.properties	60
6.2.7	Automatic Log Rotation	61
6.2.8	Return Codes	61
6.3	submitjob[.sh].....	61
6.3.1	submitbatch.properties Configuration File	61
6.3.2	submitbatchlog4j.properties Configuration File	62
6.3.3	Job Specific Parameters Files.....	63
6.3.4	submitjob[.sh] Command-Line Options.....	64
6.3.5	Property Override Order	67
6.3.6	Port Number of RMI Registry (-i)	68
6.3.7	Soft Parameters (-x) vs (-X)	68
6.3.8	Environment Variable Substitution at Runtime	69

6.3.9	Return Codes	69
6.4	bedit - Batch Configuration Editor.....	69
6.4.1	Concepts	70
6.4.2	bedit[.sh] Command-Line Options	70
6.4.3	Cluster (Coherence) Configuration.....	72
6.4.4	Threadpoolworker Configuration.....	74
6.4.5	Submitter Configuration.....	77
7.	Miscellaneous Operations	79
7.1	Forcing a Process to Not Attempt Restart.....	79
7.2	Error Processing.....	79
7.3	Marking a Process Complete from the Command Line.....	80
7.4	Sending Emails at the Conclusion of Batch Processes.....	80
7.5	Template Overrides	82
7.5.1	Batch Configuration User Exits	83
7.5.2	Properties File User Exits	87
7.5.3	Specifying Custom Log File Names	87
7.6	Turning off L2 Cache	89
8.	Batch Configuration Edit Parameters	90
8.1	Cluster Properties.....	90
8.2	Threadpool Properties.....	91
8.3	SubmitJob Properties	92


1. Batch Architecture

The product is known for its online (or foreground) processing (a.k.a. online processing) but one of the major features of the product is its set of background processes. Background processing is a major part of the product with numerous background processes supplied as standard.

The easiest way to understand the concept behind background processing is to think that background processing is like a super efficient user that operates on a batch of objects. That is why background processing is commonly called Batch.

Note: For publishing purpose the term "batch" will be used to denote background processing in this document.

Online typically operates on one object at a time, initiated by an online user or a Web Service call, where batch can operate on one or more objects (also known as a set of objects) at a time, initiated using a number of technologies.

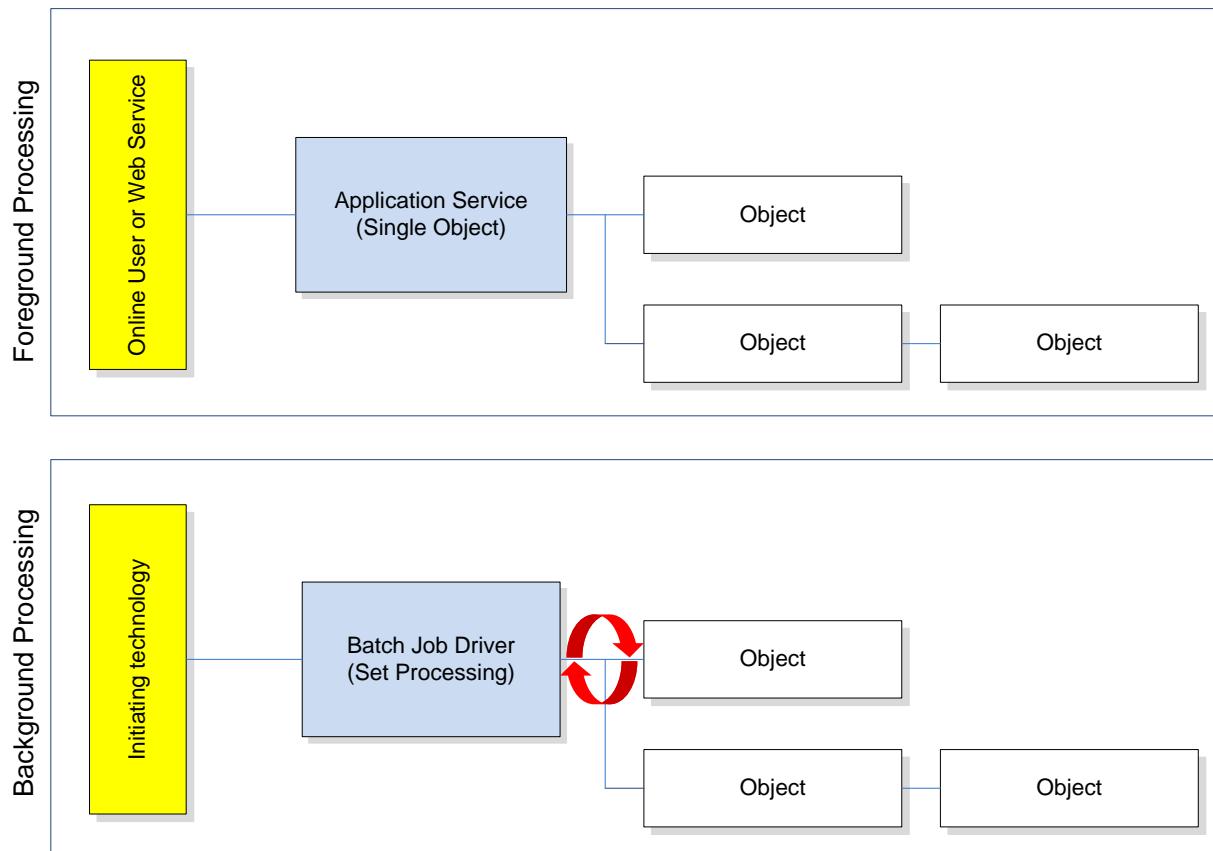

The main reasoning behind the super efficient user is that each background process consists of a driver object that identifies the set of valid objects to process and then processes each object through the same business objects that the online uses. For example, the `BILLING` driver determines which accounts are eligible to be billed according to business calendar and then passes each account to the rate object to produce a bill. Contrast this with online bill generation, where the user identifies the account manually, and then that single account is passed to the same rate object to be billed. The background process can call more than one object during the duration of the background process.

For the batch process, all of the database access and object access (including access to business objects, algorithms, user exits (server side only) etc is done through the Oracle Utilities Application Framework.

1.1 Background Processing and the Architecture

The Background Processing component is run within the Oracle Utilities Application Framework and is associated typically with the Business Application Server. It is not associated with the Web Application Server and does not require the Web Application Server to be active to operate. The only component other than product that the background processing component requires is the database server (or tier).

Depending on the initiation method employed the background processing component uses a standalone copy of the Oracle Utilities Application Framework to perform access to the database and business objects and its own copy of the same business objects used by the Business Application Server.

Essentially the background processing has its own resources (Java Virtual machines (JVMs), connection pools) independent of the rest of the architecture and can therefore be run on the same hardware as the rest of the architecture or on dedicated hardware.

2. Concepts

Before you attempt to configure or operate the product, there are important concepts that you should understand. These concepts are addressed in this document as a basis for the other documents in the Technical Documentation set.

2.1 Process Types

The product ships with a set of predefined background processes that are grouped into process types.

2.1.1 Process What's Ready Processes

Some background processes create and update records that are ready for processing. The definition of ready differs for every process. Processes of this type tend to use a business date in their determination of what's ready. For example, the bill cycle process creates bills for all bill cycles whose bill window is open (i.e., where the business date is between the bill cycle's start and end date). If the requester of the process does not supply a specific business date, the system assumes that the current system date should be used. If you need to use a date other than the current date, supply the desired date when you request the batch process.

2.1.2 Extract Processes

Some background processes extract a batch of information (to be interfaced OUT of the system). Processes of this type extract records marked with a specific batch number. If the requester of the process does not supply a specific batch number, the system assumes that the latest batch number should be extracted. If you need to re-extract an historical batch, you can supply the respective batch number when you request the batch process.

To rerun extracts it may be possible to simply rerun using a rerun number (if rerun number re-runnable) or by running the staging process that is associated with the extract then running the extract again. Refer to individual processes for more details.

Note:

Default file formats for all supplied extracts are documented in the relevant business process documentation supplied with the product.

The FILE-PATH and FILE-DIR additional parameters used in all extract processes are limited to two hundred and fifty-four (254) characters each fully expanded.

2.1.3 Ad-hoc Processes

There is a specific background process that doesn't fit into the any other categories. This process backs out bills that were created during the bill cycle process. You must supply specific parameters to this process in order to tell it which batch of bills to remove.

2.1.4 Monitor Processes

This is a new type of process where an object, which has a status, needs to have some processing done at a particular status, in the background. The monitor process detects a specific condition that can be triggered by data, status or combinations of data and status values. Once that condition has been

reached the batch process automatically executes the instructions that have been configured on the batch process parameters and the object definition itself.

2.1.5 Conversion Processes

Note: Not all Oracle Utilities Application Framework based products include conversion. Refer to the relevant product documentation to check the validity of this group of processes.

A number of processes are available when converting or migrating data from external applications into the product. These processes may or may not be used as part of an implementation depending on your conversion strategy.

Refer to the Conversion Toolkit Utilities documentation for further information about conversion.

2.1.6 Object Validation Processes

Note: Not all Oracle Utilities Application Framework based products include object validation processes. Refer to the relevant product documentation to check the validity of this group of processes.

A number of processes are available to perform general validation for conversion or upgrade purposes. Each of the major objects in the database must be validated using the respective object validation program.

We strongly recommend validating each object in the following steps:

- Execute each object's validation program in random-sample mode to highlight pervasive errors. When you execute a validation in random-sample mode, you are actually telling it to validate every X records (where X is a parameter that you supply to the batch process).
- View errors highlighted by validation programs using the Conversion Error Summary transaction.
- Correct the errors using SQL. Note, you can use the base package's transactions (e.g., Person Maintenance, Premise Maintenance, etc.) to correct an error if the error isn't so egregious that it prevents the object from being displayed on the browser.
- After all pervasive errors have been corrected; re-execute each object's validation program in all-instances mode to highlight elusive, one-off errors.

In addition to validating your objects after conversion or an upgrade, the validation programs have another use. For example, you may want to experiment with changing the validation of a person and want to determine the impact of this new validation on your existing persons. You could change the validation and then run the person validation object - it will produce errors for each person that fails the new validation.

Refer to the Conversion Toolkit Utilities documentation for further information about conversion.

2.1.7 To Do Processes

To Do processes are processes that feed off all the other processes in the system and create, update or delete To Do as defined in the system tables for the product. The number of records created will depend on the values in the system tables and the number of records satisfying those criteria.

If the To Do functionality is not used at this site then the To Do batch processes are not required to be run and should be removed from the schedules.

Refer to the Defining General Options and To Do Business Process documentation for further details.

2.1.8 Archive and Purge Processes

Note: Not all Oracle Utilities Application Framework based products include archiving. Refer to the relevant product documentation to check the validity of this group of processes.

During the life of a product implementation at your site the data in the database will build up. Historical records will remain in the product until they are archived and/or purged. There are a set of background processes that execute the necessary components of the archiving engine to archive and/or purge data from an environment. They are usually scheduled in accordance with business requirements. Configuration of the archive engine must be performed before executing these processes. Refer to the Archiving Engine documentation for further information.

2.1.9 Configuration Lab Processes

Note: Not all Oracle Utilities Application Framework based products include archiving. Refer to the relevant product documentation to check the validity of this group of processes.

To migrate or synchronize data between environments a set of processes must be executed to initiate components of the Configuration Lab component of the product. These background processes are run only when synchronizing or comparing/applying changes between two environments.

Refer to the Configuration Lab Utilities documentation for further information.

2.1.10 Interface Processes


Some of the processes implemented by the product are in fact interfaces that may need to be updated during an implementation. Refer to the individual process register in the IT Supplemental Background Process Register for details of each process.

2.2 Batch Controls

In the product the concept of Batch controls are implemented to act as control points for a background process and have the following purposes:

- For those processes that extract information, the product batch control record defines the next batch number to be assigned to new records that are eligible for extraction. For example, the batch control record associated with the process that extracts bill print information defines the next batch number to be assigned to recently completed bill routings. When this bill print extract process next runs, it extracts all bill routings marked with the current batch number (and increments the next batch number).
- Each background process' batch control record organizes audit information about the historical execution of the background process. The system uses this information to control the restart of failed processes. You can use this information to view error messages associated with failed runs.
- Many processes have been designed to run in parallel in order to speed execution. For example, the Payment Process can be executed so that payments are processed in multiple "threads" (and multiple threads can execute at the same time). Batch control records associated with this type of process organize audit information about each thread in every execution. The system uses this information to control the restart of failed threads.

An example of the batch control dialog is shown in the figure below:

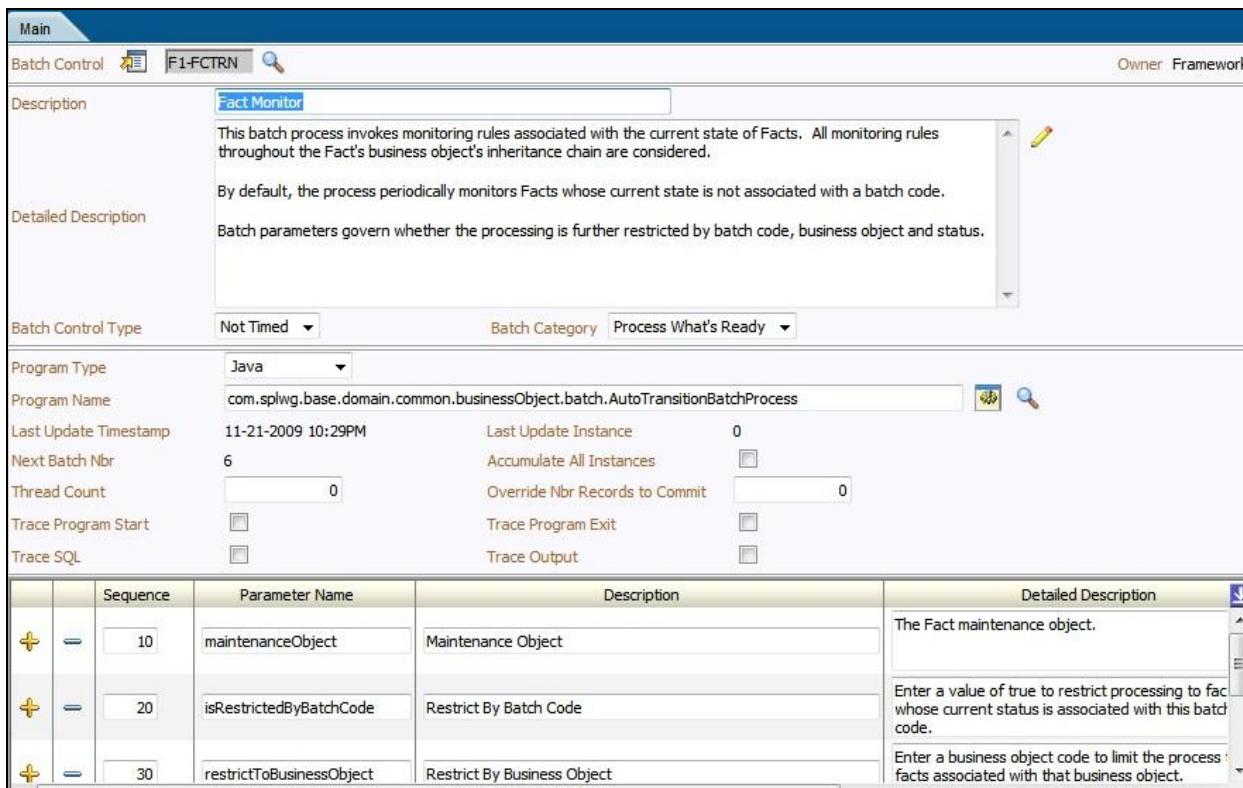

The parameters on the batch control object are:

Parameter	Usage
Batch code	Code that is the unique identifier of the background process
Description	Short description for Batch process. Used for Batch Run Tree
Detailed Description	Details of the execution of the batch process.
Batch Control Type	Whether this batch process is timed or not timed (see Timed Batch Processes for more details of this functionality).
Time Interval	The number of seconds between timed batch processes. This field only appears for and is only applicable to Batch Control Type of Timed only (see Timed Batch Processes for more details of this functionality).
Timer Active	Whether the timer is active for this timed batch process or not. This field only appears for and is only applicable to Batch Control Type of Timed only (see Timed Batch Processes for more details of this functionality).
Userid	Default userid used for security for this batch process. This field only appears for and is only applicable to Batch Control Type of Timed only (see Timed Batch Processes for more details of this functionality).
Batch Language	Default language for messages for this batch process. This field only appears for and is only applicable to Batch Control Type of Timed only (see Timed Batch Processes for more details of this functionality).

Parameter	Usage
Email Address	Default notification email or email group when batch process completes, is cancelled or errors. This field is optional and requires. This field only appears for and is only applicable to Batch Control Type of Timed only (see Timed Batch Processes for more details of this functionality).
Batch Category	Category of batch process (see Process Types for valid values).
Program Type	What technology (programming language) the program is written in. Currently only Java and COBOL ¹ are supported.
Program Name	Name of the program or java class to execute for batch
Last Update Timestamp	The Last date and time the batch control was updated. Used for update purposes.
Last Update Instance	The Last Update number the batch control was updated. Used for update purposes.
Next Batch Nbr	The rerun number allocated to this batch control to be used by the next execution (if the batch process supports rerun numbers). This value is maintained regardless of whether it is actually used by the batch run for implementation use.
Accumulate All Instances	Accumulate statistics at the batch process level as well as the individual thread level
Thread Count	Default maximum number of Threads to be used by this batch process. This parameter is actively used for Timed batch processes only (see Timed Batch Processes for more details of this functionality). For Non-timed batch processes this Thread Count is used for documentation purposes only. Refer to Explanation of Thread Limit and Thread Number for an explanation of the concept of threading.
Override Nbr Of Records to Commit	Default override commit interval to be used by all executions of this batch process. This parameter is actively used for Timed batch processes only (see Timed Batch Processes for more details of this functionality). For Non-timed batch processes this Commit Interval is used for documentation purposes only. Refer to Explanation of Timeout and Commit Interval for an explanation of the concept of commit interval.
Trace Program Start	Default value of trace flag to track start of execution to be used by all executions of this batch process. Used for development and debug purposes only.
Trace Program Exit	Default value of trace flag to track end of execution to be used by all executions of this batch process. Used for development and debug purposes only.

¹ COBOL is only supported on selected products for backward compatibility.

Parameter	Usage
Trace SQL	Default value of trace flag to track all SQL statement issued by the batch process to be used by all executions of this batch process. Used for development and debug purposes only.
Trace Output	Default value of trace flag to track internal debug information to be used by all executions of this batch process. Used for development and debug purposes only.
Batch Parameters	The list of valid parameters for this batch process including the names of the parameters, description, whether the parameter is mandatory or not and what is the default values. These values are maintained by the developers only.

Note: The system is delivered with all necessary batch controls for the supplied base background processes.

2.2.1 Viewing Batch Controls Using the Application Viewer

While the Batch Controls can be viewed using the online system it is possible to view batch control information from the Application Viewer application supplied with your product. It can be accessed from the menu **Admin → A → Application Viewer → Batch Control**. A sample of the output that appears is shown in the following diagram:

The screenshot shows the Oracle Application Viewer interface with the following details:

- Left Sidebar (Batch Control):**
 - F1-ABAL (Application Viewer - Generate Algorithms)
 - F1-AVBT (Application Viewer - Generate Batch Control)
 - F1-AVMO (Application Viewer - Generate MOs)
 - F1-AVTBL (Application Viewer - Generate Table data)
 - F1-AVTD (Application Viewer - Generate To Do Types)
 - F1-BUNPR (Bundle Monitor)
 - F1-DTDOM (Outbound Message Error To Do Entry Clean)
 - F1-FCTRН (Fact Monitor)
 - F1-FKVPB (Foreign Key Validator)
 - F1-IDCSV (User Extract for Identity Manager(CSV))
 - F1-LANG (New Language)
 - F1-REQTY (Request Type Monitor)
 - F1-REVPR (Object Revision Monitor)
 - F1-SAKRQ (Sync Request Allocate Keys Monitor)
 - F1-SRLRQ (Sync Request Load Records Monitor)
 - F1-SUBRQ (Request Monitor (Deferred))
 - F1-SYNRQ (Sync Request Monitor Process)
 - F1-SYSRQ (Sync Request Sampling Monitor (Deferred))
 - F1-TDEER (To Do Entry External Routing)
- Main Panel (F1-FCTRН):**
 - Description:** Fact Monitor
 - Detailed Description:** This batch process invokes monitoring rules associated with the current state of Facts. All monitoring rules throughout the Fact's business object's inheritance chain are considered. By default, the process periodically monitors Facts whose current state is not associated with a batch code.
 - Program Name:** com.splwg.base.domain.common.businessObject.batch.AutoTransitionBatchProcess
 - Program Type:** Java
 - Accumulate All Instances:** No
 - To Do Type:** (empty)
- Parameters Table:**

Sequence	Parameter Name	Description	Required
10	maintenanceObject	Maintenance Object	Yes
		The Fact maintenance object.	
20	isRestrictedByBatchCode	Restrict By Batch Code	No
		Enter a value of true to restrict processing to facts whose current status is associated with this batch code.	
30	restrictToBusinessObject	Restrict By Business Object	No
		Enter a business object code to limit the process to facts associated with that business object.	
40	restrictToStatus	Restrict By Status Code	No
		Enter a status code to limit the process to facts that are currently in this status.	
50	maxErrors	Override maximum errors	No
		Enter a value here to override the maximum number of errors allowed before the run is terminated.	

This information is only available in the AppViewer application if the `FI-AVBT` background process has been executed or the `genappviewitems [.sh]` command is executed.

2.2.2 Adding your own Batch Controls

In any implementation Batch Controls may need to be added for new custom processes. This needs to be done in a manner so that they are consistent with the base product as well as be supported for upgrades. The following guidelines can assist in ensuring that Batch Controls are implemented correctly:

- Every custom process should have its own batch control. While it is possible to share batch controls, there may be concurrency and restart issues if the multiple processes are executed at the same time.
- Every instance of a particular process needs to have its own batch control. If you need to run an interface multiple times, once for each supplier for example, then a batch control records needs to be assigned to each instance so that they can be tracked and managed individually. This is also important because in an environment running multiple instances of a process, there is a far more likely chance the instances will be executing at the same time according to your schedule (see point above).
- All custom batch controls should be prefixed by CM to avoid conflicts with possible future processes introduced into the batch schedule. If this rule is not obeyed then there is a risk that when an upgrade is introduced it may cause concurrency and restart issues.
- Avoid using batch controls with any special characters (i.e. characters other than letters and numbers) as it may cause intermittent or operational errors. Avoid embedded blanks and characters such as `!@#$%^&|?><.,~"{}[]*&*()/:;`.

2.3 Standard Parameters

To standardize all the batch processes, the product uses a number of common standard parameters to uniformly provide functionality across all processes. The table below lists all the standard parameters:

Parameter	Usage
Batch code	Code is the unique identifier of the background process
Batch thread number	Thread number is only used for background processes that can be run in multiple parallel threads. It contains the relative thread number of the process. For example, if the billing process has been set up to run in 20 parallel threads, each of the 20 instances receives its relative thread number (1 through 20).
Batch thread count	Thread count is only used for background processes that can be run in multiple parallel threads. It contains the total number of parallel threads that have been scheduled. For example, if the billing process has been set up to run in 20 parallel threads, each of the 20 instances receives a thread count of 20.
Batch rerun number	Rerun number is only used for background processes that download information that belongs to given run number. It should only be supplied if you need to download an historical run (rather than the latest run).

Parameter	Usage
Batch business date	Business date is only used for background processes that use the current date in their processing. For example, billing using the business date to determine which bill cycles should be downloaded. If this parameter is left blank, the system date is used.
Commit Interval	Override maximum records between commits. This parameter represents the number of transactions that are committed in each unit of work. This parameter is optional and overrides the background process's Standard Commit between records (each background process's Standard Commit between records is documented in the product documentation). You would reduce these values, for example, if you were submitting a batch process during the day and you wanted more frequent commits to release held resources. You might want to increase these values when a background process is executed at night (or weekends) and you have a lot of memory on your servers.
Timeout	Override maximum minutes between cursor re-initiation (also known as Cursor Reinitialization). This parameter is optional and overrides each background process's Standard Commit Records and Standard Cursor Re-Initiation Minutes (each background process's Standard Commit Records/ Standard Cursor Re- Initiation Minutes is documented in individual process registers in the product documentation). You would reduce these values, for example, if you were submitting a batch process during the day and you wanted more frequent commits to release held resources (or more frequent cursor initiations). You might want to increase these values when a background process is executed at night (or weekends) and you have a lot of memory on your servers. <p>Note: The Maximum minutes between cursor re-initiation is for Oracle implementations only and only applies to COBOL based processes.</p>
User ID	This is the userid that is used to access objects. It must be defined to the security component of the product.
Password	This parameter is not applicable (it is provided for backward compatibility).
Language	This is the language code used to retrieve messages and format output from background processes.

Parameter	Usage
Traces	<p>Trace program at start (Y/N), trace program exit (Y/N), trace SQL (Y/N) and trace output.</p> <p>If trace program start is set to Y, a message is displayed whenever a program is started.</p> <p>If trace program at exit is set to Y, a message is displayed whenever a program is exited.</p> <p>If trace SQL is set to Y, a message is displayed whenever an SQL statement is executed.</p> <p>If trace out is set to Y, message are output from the program at execution points.</p> <p>Note: This facility should only be used in testing and benchmarking.</p>

2.3.1 Explanation of Timeout and Commit Interval

Note: Timeout only applies to COBOL based background processes.

The Timeout and Commit interval parameters are tuneable parameters to affect the impact of the background processes on the other processes running and prevent internal database errors. In most cases using the defaults will satisfy your site requirements. It is also important to understand their impact to ascertain whether any change is required.

During processing of any background process a main object is used to drive the process. For example in Payment the main object is Payment Event. The Payment process loops through the payment event objects as it processes. For other processes it is other objects that are considered the main object. This main object type is used to determine when a transaction is complete.

For both Timeout and Commit interval this is important as:

- When a certain number of main objects have been processed then a database commit is issued to the database. This number is the Commit Interval. The larger the commit interval the larger the amount of work that the database has to keep track of between commit points.
- The Timeout parameter is used to minimize issues in Oracle where the unit of work is so large it causes a Snapshot too old. Oracle stores undo information on the Rollback Segment and the read consistent information for the current open cursor is no longer available. This is primarily caused when Oracle recycles the Rollback Segment storage regularly. The product is prevented by reinitializing the cursor on a regular basis to prevent an error. When this timeout, known as the Cursor Reinitialization, is exceeded then at the end of the current transaction a commit will be issued.
- At any time in a process a commit for objects processed may be caused by the reaching the Commit Interval or the time limit set on Timeout, whichever comes first.

2.3.2 Explanation of Thread Limit and Thread Number

One of the features of the Oracle Utilities Application Framework is the ability to run background processes using multiple threads.

The threading concept in the product is simple. Each thread takes a predetermined slice of the data to work on. The last thread checks if all other threads are finished and updates the status of the batch control records. For example, if you have 10 threads, then each thread takes 1/10th of the work. As each thread is executing it processes its workload and then completes, the last thread executing is responsible for updating the overall process status to indicate completion.

Implementing threading means you have to execute a number of batch processes with an ascending thread number up to the thread limit. For example, if you have a batch process with 10 threads, you must run 10 batch processes each with a unique thread number between 1 and 10 to complete the batch process. Threads can be located on the same machine or different machines. For example, you can run threads 1 to 5 on one machine and threads 6– 10 on another.

Note: If there is limited data skew in the data then the threads should finish around the same time. If there is some data skew then some threads may finish later than others.

To implement multi-threading when you submit a process:

- Specify a thread limit greater than 1 as a parameter.
- Execute a process for every thread with a sequential thread number up to and including the thread limit. There are a couple of implementation guidelines with threading:
 - Make sure the number of threads is not excessive. You do not want to flood the CPUs.
 - You must submit a process per thread. In some submission methods this is done automatically and in some it is done manually.
 - Threading will increase throughout BUT it will cause higher than usual resource usage (CPU, Disk etc) as well as higher contention. Excessive threading can in fact cause performance degradation in online as well as background processing. Therefore the number of threads should not be excessive.

Almost all background processes within the product support multiple threads (the only processes typically single streamed are extracts and data loads as they involve sequential files).

2.3.3 Explanation of Restart and Rerun

The product allows all background processes to be restarted or rerun as required. During the execution of the background process, restart information per thread is stored within framework, like a checkpoint. This checkpoint is performed at the last commit point as dictated by the Commit Interval and/or Timeout value (Time out only applied to Oracle implementations only). When a commit is performed, the last commit point is recorded for the execution. If a thread of a background process fails, the database automatically rolls back to the last commit point. The thread can then be restarted from that point automatically or from the start of the data. To indicate the restart, the thread is executed with the same parameters as the original.

Additionally, processes are re-runable. Re-runable means that a specific run number can be re-run as required or a process at a specific date. Using a rerun number or a previously used business date are all that is required to rerun a process.

Note: Not all background processes use Run number as a run indicator. Refer to the online documentation for which batch processes are re-runable.

2.4 Timed Batch Processes

Note: This facility is ideal with Monitor batch processes.

Traditionally when you consider batch you picture processes that process large amounts of records in a longer amount of time than an online transaction. They have a start time and an end time and execute a limited amount of times a day.

The Oracle Utilities Application Framework supports the traditional approach but also supports the ability to run batch processes continuously in the background. For example, you may have a background process run continuously to monitor behavior on a particular object (i.e. the monitor processes). Therefore the concept of timed (continuous) and non-timed (traditional) batch processes was introduced.

The idea is that the site configures whether a batch process is timed or not on the batch control record definition. By default all batch processes will be defined as non-timed for backward compatibility. The site then configures the batch processes it deems to run continuously as timed. At this point additional information is required:

- **Timer Interval** – The time, in seconds, between executions of the batch process. If the current execution of the timed job exceeds this tolerance, a new instance of the job will not be submitted until the job completes.
- **Timer Active** – Whether the timed batch process is active in timed mode or not. This enables the timed batch process to be switched off if necessary. Timer Active is active when this value is set to Yes and inactive when set to No.
- **Userid** – Default userid to be used for the timed batch process.
- **Batch Language** – Default language for the timed batch process.
- **Email Address** – Email address or group to email when there is an issue with the batch process.

Note: The Email adapter must be enabled for this functionality to be enabled.

The figure below illustrates the additional entries:

Batch Control Type	Timed	Batch Category	Monitor
Timer Interval	0	Timer Active	
User ID	<input type="text"/>	Batch Language	
Email Address	<input type="text"/>		

Additionally the following additional attributes should be specified for timed batch processes:

- Thread Count
- Override Nbr of Records to Commit (optional)

Once the Batch Control Type is defined the submission method then implements the logic to keep the background process continuously:

- For sites using the online submission facility with the online daemon, the batch controls which are timed are executed automatically once the daemon starts and is routed to a defined batch server. If the daemon or batch server crashes then the batch process will fail and automatically restart upon restart of the daemon or batch server.

- For sites using the external scheduler, the timed batch process will commence the first time the batch process is initiated. If the `threadpoolworker` or `submitjob` fails, for any reason, and there is no clustering configured then the batch process must be restarted manually (or using a scheduler) to initiate the continuous process once again.

To stop the continuous batch process at any time the following techniques can be used:

- Set the Timer Active flag to No on the Batch Control record for the batch process. At the next Timer Interval, the timed batch process will stop and complete. Remember to change the Timer Active back to Yes again to re-instate the batch process as a continuous process.
- Cancel the batch process using the JMX interface (JMX console or `jmxbatchclient`)
- Kill the `submitjob` process that initiated the batch process. This should be the last resort.


2.5 Common Configuration Files

As with the online component of the Oracle Utilities Application Framework there are a number of configuration files that control the performance and behavior of the batch component. It is recommended that you familiarize yourself with the *Oracle Revenue Management and Billing Server Administration Guide* for additional advice in relation to the configuration discussed.

The batch component houses the configuration files differently to the online and web services component. The online and web services are housed within a J2EE Web Application Server and therefore the configuration files are located according to the J2EE standards.

In the batch component the configuration are housed in directories as the batch component is a J2EE Web Application Server. Therefore, during the configuration process, the configuration files used by the batch component are built using templates using the `initialSetup` utility. This utility deposits the configuration files in the `$$SPLBASE\splapp\standalone\config` directory (or `%SPLBASE%\splapp\standalone\config` directory in Windows).

The figure below summarizes the directory structure and the relevant configuration files:

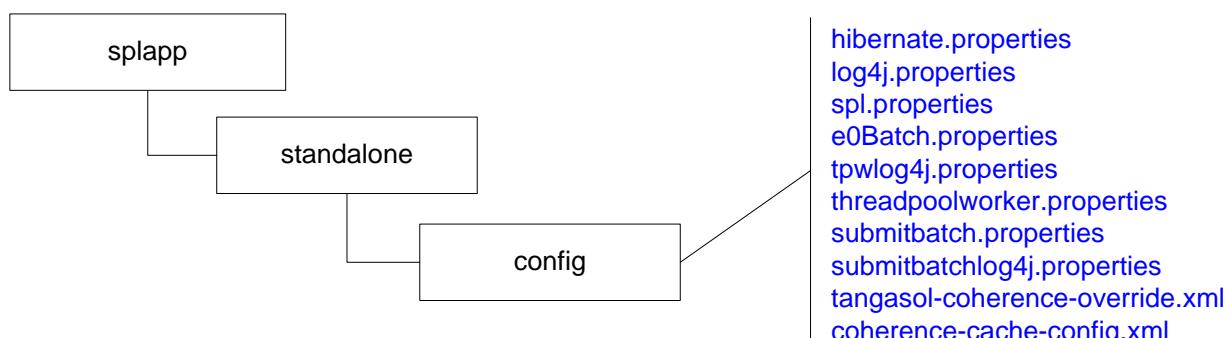

The following configuration files (along with their templates) are listed below:

Configuration File	Contents	Template
eOBatch.properties	General environment settings	eOBatch.properties.template
hibernate.properties	Database connectivity	hibernate.properties.batch.template
log4j.properties	Logging settings	log4j.properties.standalone.template
spl.properties	Application behaviour	spl.properties.standalone.template
submitbatch.properties	submitjob default settings	submitbatch.properties.template
submitbatchlog4j.properties	submitjob logging settings	submitbatchlog4j.properties.template
threadpoolworker.properties	threadpoolworker configuration	threadpoolworker.properties.template
tpwlog4j.properties	threadpoolworker logging settings	tpwlog4j.properties.template
coherence-cache-config.xml	Cache settings for cluster	coherence-cache-config.xml.template
tangasol-coherence-override.xml	Override setting for cluster	tangasol-coherence-override.xml.template

The subsequent subsections will outline the contents of the configuration files.

2.5.1 eOBatch.properties

The eOBatch.properties configuration file defines the environmental settings for the batch component. Typically this configuration file is generated and never altered.

The configuration contains two settings:

Parameter	Context
SPLOUTPUT	Location of the output directory for logs and temporary files.
standalone.dir	Home location of the batch component. This is a relative path to the location of this configuration file.

For example:

```
standalone.dir=..j..jsplappjstandalone
```

```
SPLOUTPUT=jspljsploutputjDEMO
```

Note: This configuration file should not be altered unless instructed by Oracle Support.

2.5.2 `spl.properties` - Product Configuration Settings

The `spl.properties` configuration file is the configuration file that contains product behavior settings for the batch component. This configuration file also exists in the online and web application server so a common configuration standard was adopted.

For the batch component the `spl.properties` uses the following settings:

Parameter	Context
<code>com.oracle.xpath.flushTimeout</code>	The time, in seconds, when the Xpath cache is automatically cleared. A zero (0) value indicates never auto-flush cache and a positive value indicates the number of seconds.
<code>com.oracle.xpath.LRUSize</code>	Maximum number of XPath queries to hold in cache across all threads. A zero (0) value indicates no caching, minus one (-1) value indicates unlimited or other positive values indicate number of queries stored in cache. Cache is managed on a Least Reused basis.
<code>com.splwg.batch.cluster.jvmName</code>	(Optional) Unique Name for JVM. Name must not include embedded blanks.
<code>com.splwg.schema.newValidations.F1</code>	Internal use only
<code>spl.runtime.cobol.corecall</code>	If COBOL is used, whether remote calls are supported. (true or false). Defaults to false.
<code>spl.runtime.cobol.encoding</code>	If COBOL is used, the character set supported by the Business Application Server.
<code>spl.runtime.cobol.sql.cache.maxTotalEntries</code>	Number of SQL statement entries stored in the cache. Defaults to 1000.
<code>spl.runtime.cobol.sql.cursorCache.maxRows</code>	If COBOL used, number of cursors cached. Defaults to 10.
<code>spl.runtime.cobol.sql.disableQueryCache</code>	If COBOL used, whether the query cache is disabled. Defaults to false.
<code>spl.runtime.cobol.sql.fetchSize</code>	If COBOL used, size of fetch buffers for SQL statements. Defaults to 150.
<code>spl.runtime.environ.init.dir</code>	Location of the base configuration files.
<code>spl.runtime.environ.SPLEBASE</code>	Location of SPLEBASE
<code>spl.runtime.options.isFCFEnabled</code>	Whether Oracle RAC Fast Connection Failover support is enabled. This value is set to true when <code>ONSCONFIG</code> is specified.
<code>spl.runtime.options.onsserver</code>	ONS Configuration string used for Oracle RAC Support. This value is set to the value of <code>ONSCONFIG</code> .
<code>spl.runtime.oracle.createStatementCacheSize</code>	The SQL cache size allocation for SQL statements. Defaults to 300.

Parameter	Context
spl.runtime.service.extraInstallationServices	Name of Application service used for installation defaults.
spl.runtime.sql.high value	High Value used for processing
spl.runtime.utf8Database	Whether the database supports the UTF8 character set. (true or false).
spl.tools.loaded.applications	List of applications installed. Values are typically base,xxx,cm where xxx is the product code.

2.5.3 **hibernate.properties** - Database Connectivity Properties

Note: Unlike the online and web services layer, it is not possible to use JNDI based JDBC connections. Batch must use UCP for connection pooling.

Opening a connection to a database is generally much less expensive than executing an SQL statement. A connection pool is used to minimize the number of connections opened between application and database. It serves as a librarian, checking out connections to application code as needed. Much like a library, your application code needs to be strict about returning connections to the pool when complete, for if it does not do so, your application will run out of available connections. Hence, the need for having a connection pooling mechanism such as Hibernate using Universal Connection Pool (UCP) connection pooling.

Hibernate is a powerful Object Relational Mapping (ORM) technology that makes it easy to work with relational databases. Hibernate makes it seem as if the database contains plain Java objects, without having to worry about how to get them out of (or back into) database tables. Coupled with the UCP connection pooling, it provides a comprehensive connectivity tool for the java (or COBOL, if used) to operate effectively against the database.

The product uses the Hibernate and UCP libraries to create a connection pool and connect the java (or COBOL, if used) objects to the database to store, update, delete and retrieve data. It is used for all the database access for online as well as batch.

For more information on the technology aspects of Hibernate, refer to <http://www.hibernate.org>.

The product has a configuration file for the database connectivity and pooling called the **hibernate.properties** configuration file. This file contains the configuration settings for the database connections and the connection pool to be used by any of the SQL statements accessing the database.

The configuration settings contained in the **hibernate.properties** file are summarized in the following table:

Setting	Usage
hibernate.cache.use_second_level_cache	May be used to completely disable the second level cache, which is enabled by default for classes which specifies a cache mapping. Defaults to false.

Setting	Usage
hibernate.cglib.use_reflection_optimizer	Enables use of CGLIB instead of runtime reflection (System-level property). Reflection can sometimes be useful when troubleshooting, note that Hibernate always requires CGLIB even if you turn off the optimizer. Tends to make Hibernate load faster if value is false. Defaults to false.
hibernate.connection.databaseName	Database name used for SQL Server
hibernate.connection.driver_class	This is the JDBC driver class used by Hibernate.
hibernate.connection.password	This is the user ID used to connect to the database. This value is sourced from the DBPASS parameter from the ENVIRON.INI . If the value is prefixed by "ENC" then the password is encrypted.
hibernate.connection.provider_class	The classname of a custom Connection Provider which provides JDBC connections to Hibernate. The product uses the UCP Connection provider. Other providers are not supported.
hibernate.connection.release_mode	This parameter controls when a connection is released to the pool. By default the value is set to auto. If you wish to view the module executing in the MODULE column on the v\$session table, then this value must be set to on_close. Using auto in this example may lead to incorrect values in MODULE.
hibernate.connection.url	This is the connection string used to connect to the database. The URL is built using the protocol outlined by the JDBC driver and uses the values from the ENVIRON.INI . It will either contain the standard JDBC connection string or the value of DB_OVERRIDE_CONNECTION.
hibernate.connection.username	This is the user ID used to connect to the database. This value is sourced from the DBUSER parameter from the ENVIRON.INI .
hibernate.dialect	This is the SQL dialect (database type) for the database being used. Any valid Hibernate dialect may be used. Refer to http://www.hibernate.org/hib_docs/v3/api/org/hibernate/dialect/package-summary.html for a full list. This value is sourced from the DIALECT parameter from the ENVIRON.INI .
hibernate.jdbc.batch_size	A non-zero value enables use of JDBC2 batch updates by Hibernate. Defaults to 30.

Setting	Usage
hibernate.jdbc.fetch_size	Determines a hint to the JDBC driver on the number of rows to return in any SQL statement. Defaults to 100.
hibernate.jmx_enabled	Enable or disable JMX Mbeans for monitoring.
hibernate.max_fetch_depth	Sets a maximum "depth" for the outer join fetch tree for single-ended associations (one-to-one, many-to-one). A 0 disables default outer join fetching. Defaults to 2.
hibernate.query.factory_class	Chooses the HQL parser implementation.
hibernate.query.substitutions	Mapping from tokens in Hibernate queries to SQL tokens (tokens might be function or literal names, for example). The product uses true 'Y', false 'N'.
hibernate.show_sql	Write all SQL statements to console. Defaults to false.
hibernate.transaction.factory_class	The classname of a Transaction Factory to use with Hibernate Transaction API.
hibernate.ucp.connection_wait_timeout	Specifies how long, in seconds, an application request waits to obtain a connection if there are no longer any connections in the pool.
hibernate.ucp.inactive_connection_timeout	Specifies how long, in seconds, an available connection can remain idle before it is closed and removed from the pool.
hibernate.ucp.max_idle_time	Not used
hibernate.ucp.max_size	Maximum Pool Size
hibernate.ucp.max_statements	SQL Buffer size
hibernate.ucp.min_size	Minimum Pool Size

For a more in-depth description of these parameters and others not included with the product see <http://www.hibernate.org> and <http://www.oracle.com/technetwork/database/enterprise-edition/downloads/ucp-112010-099129.html>.

2.5.4 log4j.properties - Logging Configuration

Note: This log file should not be altered unless specified. The generated configuration file has all the recommended settings for all sites.

The product uses the log4j Java classes to centralize all log formats into a standard format. The details of the configuration settings and log4j itself are available at <http://logging.apache.org/log4j/> or <http://en.wikipedia.org/wiki/Log4j>. This log file is primarily used for the daemon and THIN execution modes.

2.5.5 coherence-cache-config.xml

The `coherence-cache-config.xml` configuration file is used by the `CLUSTERED` mode of execution to manage the Oracle Coherence based cache across the batch cluster. This file is generally not altered at the implementation level as it is preconfigured to execute the batch component of the product.

For details of the contents of this file refer to the [Oracle Coherence Integration Guide](#).

2.5.6 tangasol-coherence-override.xml

Note: This configuration file replaces the `tangasol` parameters in various configuration files in previous versions of the product.

The `tangasol-coherence-override.xml` file is used to specify cache parameters for `CLUSTERED` mode batch.

The following settings apply to the settings provided by the configuration of `CLUSTERED` mode:

Parameter	Context	Source
address	IP Address assigned to cluster. Specifies the multicast IP address that a Socket will listen or publish on. Valid values are from 224.0.0.0 to 239.255.255.255. For non-multicast implementations use the Well Known Addresses (WKA) functionality.	Derived from <code>COHERENCE_CLUSTER_ADDRESS</code> in <u>ENVIRON.INI</u> .

Parameter	Context	Source
cluster-name	<p>The cluster-name element contains the name of the cluster. In order to join the cluster all members must specify the same cluster name. The name can be up to 32 characters to define the name of the cluster. This is required and must be unique for each environment. With <code>DISTRIBUTED</code> mode, the batch JVMs for an environment are naturally grouped because they register themselves through database table <code>F1_TSPACE_ENTRY</code>, but in <code>CLUSTERED</code> mode the JVMs are joined through a Coherence cache. The cache may be across all environments, so a unique cluster name, along with address and port (see below), is required to ensure that they are appropriately grouped per environment.</p> <p>Environments are typically separated by database and/or database user, so a possible convention may be to use a combination of database name and owner Id as the cluster name, for example <code>FWDEMO.SPLADM</code>.</p>	Derived from <code>COHERENCE_CLUSTER_NAME</code> in <u>ENVIRON.INI</u> .
license-mode	<p>License Mode.</p> <p>Specifies whether the batch clustering facility is being used in a development or production mode.</p> <p>Valid values are <code>prod</code> (Production), and <code>dev</code> (Development).</p>	Derived from <code>COHERENCE_CLUSTER_MODE</code> in <u>ENVIRON.INI</u> .
port	<p>Port number assigned to cluster.</p> <p>Specifies the multicast port that the Socket will listen or publish on. Valid values are from 1 to 65535. For non-multicast implementations use the Well Known Addresses (WKA) functionality.</p>	Derived from <code>COHERENCE_CLUSTER_PORT</code> in <u>ENVIRON.INI</u> .

For details of the contents of this file and additional parameters refer to the Oracle Coherence Developers Guide and the external scheduler section of this document.

For example:

```
<coherence>
  <cluster-config>
```

```
<member-identity>
<cluster-name>FWDEMO.SPLADM</cluster-name>
</member-identity>
<multicast-listener>
<address> 239.128.0.10</address>
<port> 7810</port>
</multicast-listener>
<service-guardian>
<service-failure-policy>logging</service-failure-policy>
<timeout-milliseconds>86400000</timeout-milliseconds>
</service-guardian>
</cluster-config>
<logging-config>
<destination>log4j</destination>
<severity-level>S</severity-level>
</logging-config>
<license-config>
<license-mode>prod</license-mode>
</license-config>
</coherence>
```

The example above assumes multi-cast use of the CLUSTERED mode; refer to Oracle Coherence Developers Guide and the external scheduler section of this document for alternative examples.

Note:

If using Coherence Cluster Address and Coherence Cluster port then they form a multicast address unique to the environment/cluster. All worker and submitter JVMs that want to join this cluster must have the same cluster name, cluster address and cluster port.

The first worker JVM that starts for a particular combination of cluster/address/port establishes that cluster. Other JVMs with this same combination will then join this cluster.

The framework guards against the submission of batch processes to the wrong cluster in two ways. Firstly, if the address port matches an existing cluster's address port, but the cluster name is different, the JVM will exit with this error message:

This member could not join the cluster because of a configuration mismatch between this member and the configuration being used by the rest of the cluster.


Secondly, if a JVM's cluster name references an existing cluster, but the database to which the existing cluster is connected is not the same as the joining JVM's, it will exit with this message:

Error validating cluster membership. Terminating...

In either case it is a configuration issue that needs to be corrected.

2.6 Configuration Process

To configure the batch component during the installation process and post-installation then the following process should be used:

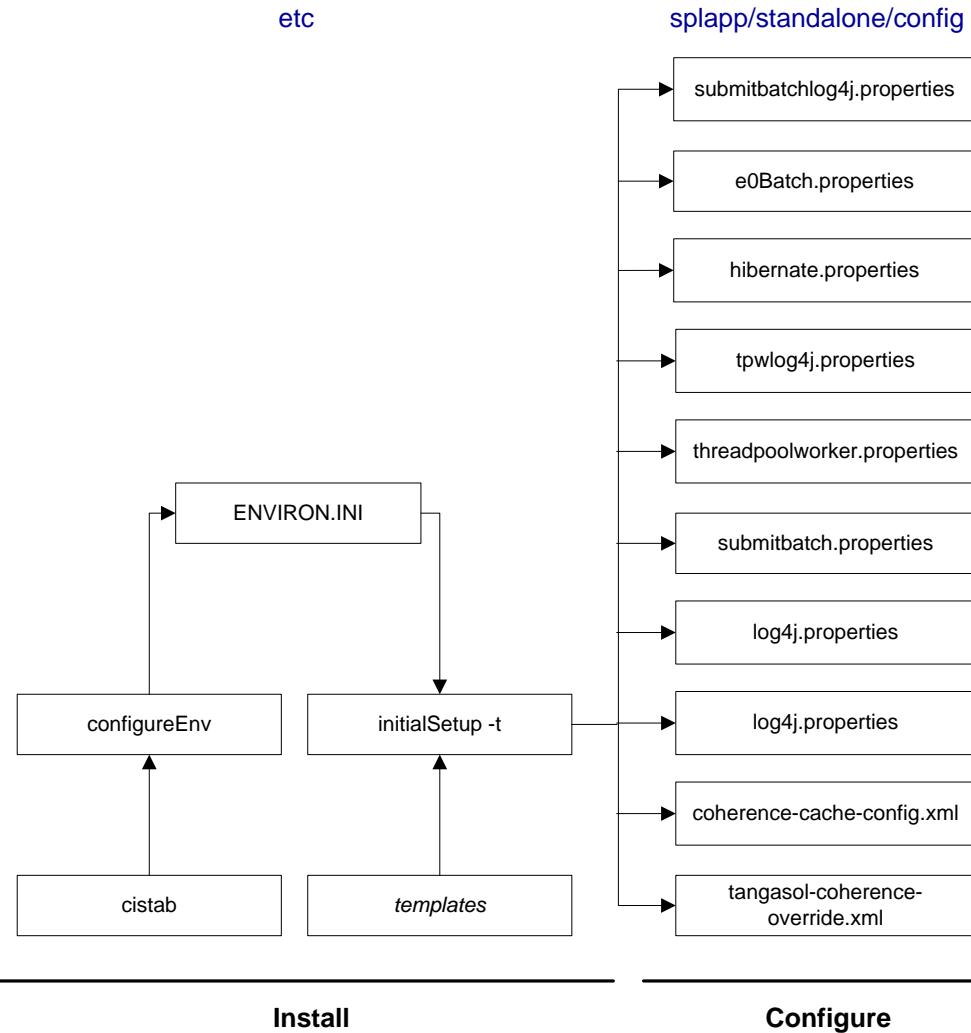

- The `configureEnv` utility is used during installation time and can be used post implementation to set parameters in the `ENVIRON.INI`.


Note: The `configureEnv` utility should be used to make any changes to the `ENVIRON.INI`. Manual changes to this configuration file are not recommended.

- After the `ENVIRON.INI` has been set or altered, the settings must be reflected in the relevant configuration files used by the batch component using the `initialSetup` utility. The `initialSetup` utility takes the relevant templates, builds the configuration files and deposits them in the `$SPLBASE\splapp\standalone\config` directory (or `%SPLBASE%\splapp\standalone\config` directory in Windows).

The configuration files are now ready to be used for the batch component.

2.7 Submission Methods

There are a number of ways of submitting batch processes within the Oracle Utilities Application Framework. The various ways reflect the different uses for the product at a site. The figure below summarizes the various submission methods:

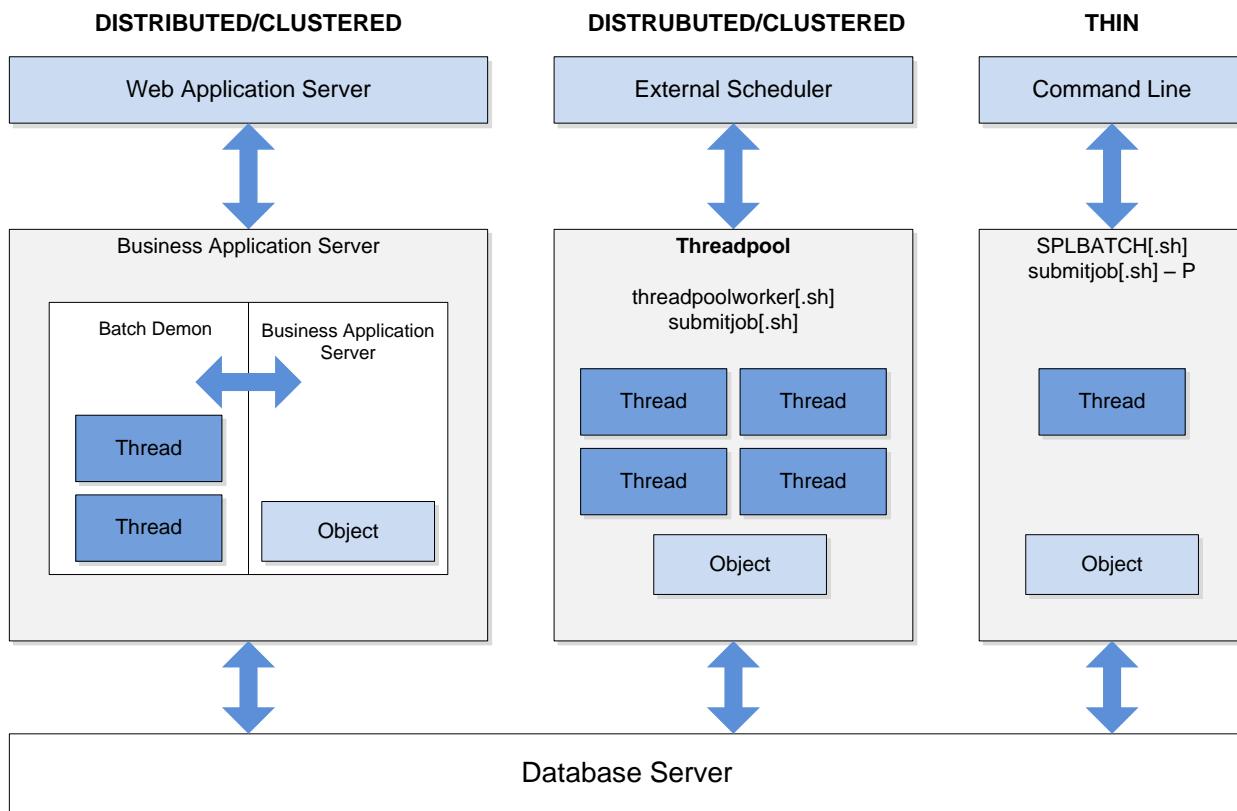

- It is possible to submit the batch process in a basic interactive mode where the batch object executed in a single JVM. This mode is known as THIN mode and is primarily designed for developers to test their code in isolation from the rest of the system. The mode is not efficient enough to be recommended for any activity other than developer testing. Refer to [Interactive Submission](#) section for details on how to use this method.
- The product browser user interface allows the registration and execution of batch processes within the JVM used online. This mode allows part of the resources of online be devoted to registering and executing of batch processes. This method is primarily designed for use for testing purposes. Refer to the [Online Submission](#) section for details on how to use this method.
- Typically at a site, a batch scheduling tool is used to schedule and manage all of the background tasks required at a site. This can include running product batch processes and any related maintenance process such as transferring interface files to and from other systems, backup and other maintenance activities. This method is designed for production use and has a number of variations to support flexible scheduling options. Refer to the [External Scheduler Submission](#) section for details on how to use this method.


3. Monitoring Background Processes

When a background process is initiated the product records information about the progress of the execution using a number of methods. These methods can be used to provide feedback to the operations personnel on the health and progress of individual processes.

3.1 Batch Run Tree

Within the product browser interface there is an ability to monitor the status and outcomes of individual processes. This can be useful for finding out what actually occurred if an error condition occurred. To access the screen:

- Acquire a logon to the browser interface. It may be necessary to setup a special userid that operators can use to access the online.
- Select the **Batch → Batch Run Tree** option from the side menu. A sample is displayed in the figure below:

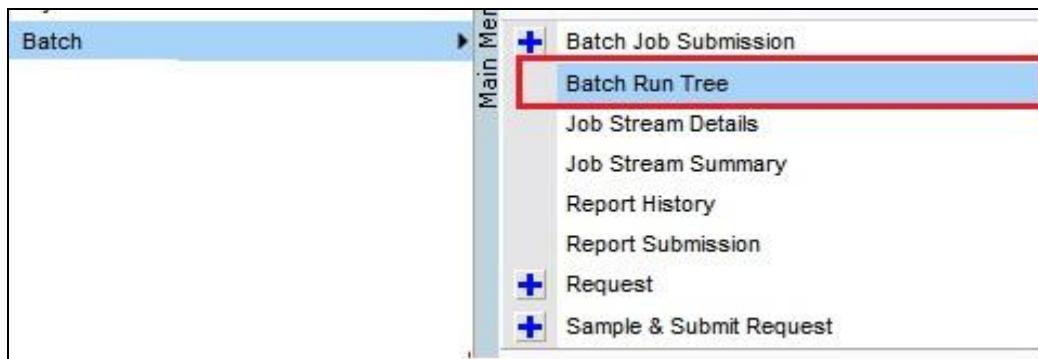

- A batch search window will appear to allow select of the individual execution of the process. It is possible to search on batch number, batch Control Id or rerun number. A sample is illustrated below.

The screenshot shows a Windows Internet Explorer window titled 'Batch Run Tree Search - Windows Internet Explorer'. The window contains a search form with fields for 'Batch Control' (containing 'F1-AVBT'), 'Batch Number' (empty), 'Batch Rerun Number' (empty), and 'On or Before Batch Business Date' (empty). Below the form is a table with the following data:

Batch Control	Description	Batch Number	Batch Business Date	Run Status	Batch Rerun Number
F1-AVBT	Application Viewer - Generate Batch Control	5	07-07-2010	Complete	0
F1-AVBT	Application Viewer - Generate Batch Control	4	07-01-2010	Complete	0
F1-AVBT	Application Viewer - Generate Batch Control	3	06-16-2010	Complete	0
F1-AVBT	Application Viewer - Generate Batch Control	2	06-15-2010	Complete	0
F1-AVBT	Application Viewer - Generate Batch Control	1	03-31-2010	Complete	0

- Select the appropriate batch run to monitor. This will then open a portal with the appropriate run information (for example):

Main Run Control

Batch Control Application Viewer - Generate Batch Control Date Time 07-07-2010 12:14PM

Batch Number 5

Batch Rerun Number 0

Batch Code F1-AVBT - Batch Number 5 - Batch Rerun Number 0 - Batch Business Date 07-07-2010 - Run Status Complete

Processed 310 record(s) in 12 second(s)

Thread Nbr 1 - Complete Processed 310 record(s) in 12 second(s)

Batch Instance 107836 - Records Processed 310 - Records in Error 0 - Restart Data

Informational - GenerateBatchControlXMLWorker - Batch thread 1 of 1 started at 2010-07-07-12.14.45

Informational - GenerateBatchControlXMLWorker - Batch thread 1 ended normally at time 2010-07-07-12.14.57.

- In the case of the sample the process ended successfully. Additionally the following additional elements may be displayed:
 - If the process ended with any errors then the error message would be indicated.

Processed 0 record(s) with 1 error(s) in 1 second(s)

Thread Nbr 1 - Complete - Processed 0 record(s) with 1 error(s) in 1 second(s)

Batch Instance 108307 - Records Processed 0 - Records in Error 1 - Restart Data

Informational - CIPOFACB - Batch thread 1 of 1 started at 2004-03-16-11:55:05

Error - CIPCCCHR - Characteristic Type FA ID is not valid for this Customer Contact Type.

Note: Technical Errors (e.g. SQL Errors) are indicated using this method.

- Business errors that are generated as To Do's are indicated separately.

To Do Entries Created - 1

Entries Open - 1

Statistics for this month was already calculated., Conservation Program GENERAL

Processed 2 record(s) with 1 error(s) in 2 second(s)

Thread Nbr 1 - Complete - Processed 2 record(s) with 1 error(s) in 2 second(s)

Batch Instance 108669 - Records Processed 2 - Records in Error 1 - Restart Data

Informational - AutoTransitionBatchProcessWorker - Batch thread 1 of 1 started at 04-16-2008 05:15PM

Informational - AutoTransitionBatchProcessWorker - Batch thread 1 ended normally at 04-16-2008 05:15PM.

- If the program was restarted, each restart would be displayed in the tree individually.
- To get more information about the error click on the error message on the tree.

The Batch Run tree is available to any valid user and is a method to communicate the execution information to the relevant business representatives.

3.2 Using SQL Queries to Monitor Background Processes

The Batch Run Tree displays information within the database that is collected by the Oracle Utilities Application Framework for every background process execution, regardless of the method used to initiating the process.

While it is possible to use the Batch Run Tree as a spot check on particular processes, it is possible to create views on the underlying to extract the data for long term analysis of batch performance. These views can be then used to analyse or extract the data for further investigation.

The details of the views that can be created and types of analysis that can be performed are located in the Batch Troubleshooting whitepaper in the Performance Troubleshooting series KB Id: 560382.1 on [My Oracle Support](#).

3.3 Monitoring using JMX classes

The product supports management and monitoring using Java Management eXtensions (JMX). For example, a user may want to see exactly which processes are busy running in a worker JVM at any particular point, and may want to be able to cancel runaway tasks. Refer to the Java Management Extensions (JMX) Technology site for more information.

Java Management Extensions (JMX) is a technology that specifically addresses this requirement to introspect information within the Oracle Utilities Application Framework. By employing Management Beans (MBeans), the batch framework can implement management interfaces for the various monitoring and management instrumentation points. A remote client, such as Sun's [jconsole](#) or other JMX consoles/browsers, can then communicate with the active MBeans to query and modify the behavior of the batch node.

This section will outline the basic facilities available using JMX. Configuration of the JMX capability is discussed within each submission method outlined in Submission Methods.

3.3.1 Jconsole

Jconsole is a GUI application provided with the Java JDK installed. It can be invoked with the connection information configured with the product as a parameter, for example:

```
jconsole service:jmx:rmi:///jndi/rmi://<host>:<port>/spl/fw/jmxConnector
```


The <server>, <port> and the "/spl/fw/jmxConnector" string correspond with the property values specified for the batch node. These values are specified in configuration files outlined in the relevant subsection of the "Submission Methods" section of this document.

Refer to <http://java.sun.com/javase/6/docs/technotes/guides/management/jconsole.html> for more information on using jconsole.

Note: While jconsole is used in the examples shown in this document, other JMX consoles and JMX browsers (JSR160) can be used.

3.3.2 Mbeans

The JMX interface exposes a number of MBeans to manage the Batch cluster from any node on the cluster. The Mbeans expose a hierarchical set of information for the cluster. The JMX API has a number of levels:

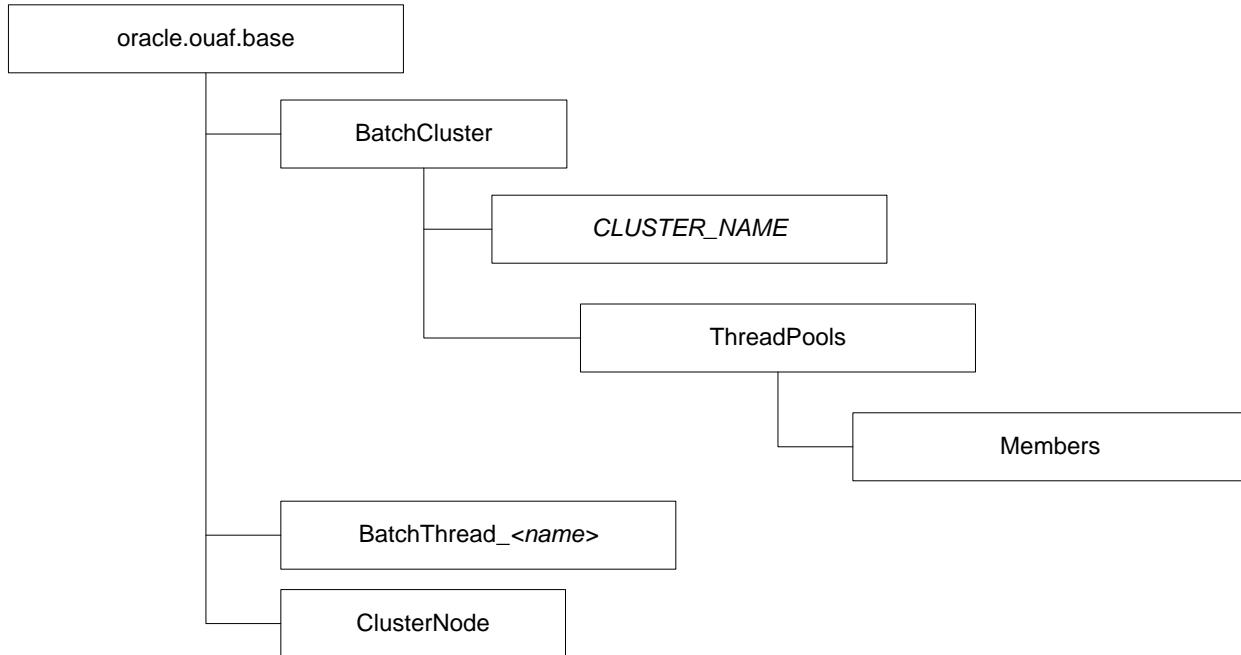


The `BatchCluster` MBean holds attributes and operations at the cluster level. The MBean has a series of `Threadpools`. Each Threadpool has one or more `Members` which represent the nodes the threadpool is executing across. Nodes can be present for the same machine or multiple machines (one node per instance).

3.3.3 BatchCluster MBean

Note: This API is only available for `CLUSTERED` mode.

The `BatchCluster` MBean contains the global information about the batch cluster. It creates an entry with the name of the Batch Cluster as the identifier. This level is designed to provide information and operations at a cluster level. When connecting to the JMX facility from a JSR160 compliant facility the `BatchCluster` Mbean is always visible.

For example:

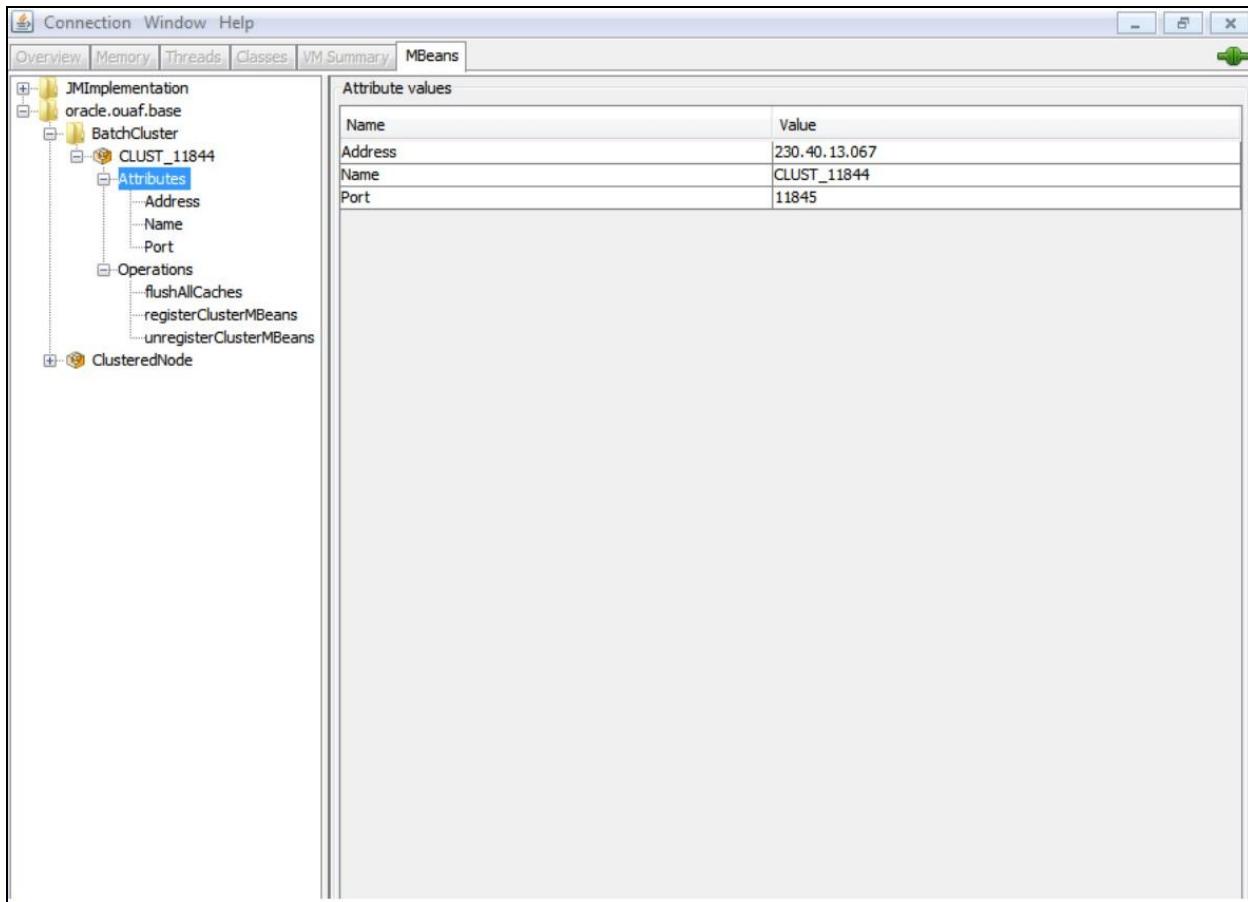

The `BatchCluster` Mbean exposes a number of attributes:

Attribute	Comments
Address	Cluster address as specified in <code>COHERENCE_CLUSTER_ADDRESS</code> in <code>ENVIRON.INI</code>
Name	Name of Cluster as specified in <code>COHERENCE_CLUSTER_NAME</code> in <code>ENVIRON.INI</code> .
Port	Port number assigned to Cluster as specified in <code>COHERENCE_CLUSTER_PORT</code> in <code>ENVIRON.INI</code> .


The `BatchCluster` Mbean supports a number of operations:

Operation	Comments
<code>flushAllCaches</code>	Flush the data reuse cache across the batch cluster. Invoke this operation to reload configuration data changes for batch jobs.
<code>registerClusterMBeans</code>	Register the Mbeans for lower level tracking. This needs to be invoked to allow threadpool and batch thread level tracking.
<code>unregisterClusterMBeans</code>	Disable lower level tracking. This stops low level tracking.

3.3.4 Threadpools Mbean

Note: This information is only accessible once the `registerClusterMbeans` operation is executed. This API is only available for CLUSTERED mode.

When the `registerClusterMbeans` operation has been executed, the API exposes lower level information on the active threadpools in the cluster. Information about inactive threadpools is not shown. Each threadpool has a tree structure in the API. When accessing the API from a JSR160 compliant tool, the information for the threadpools are made available. For example:

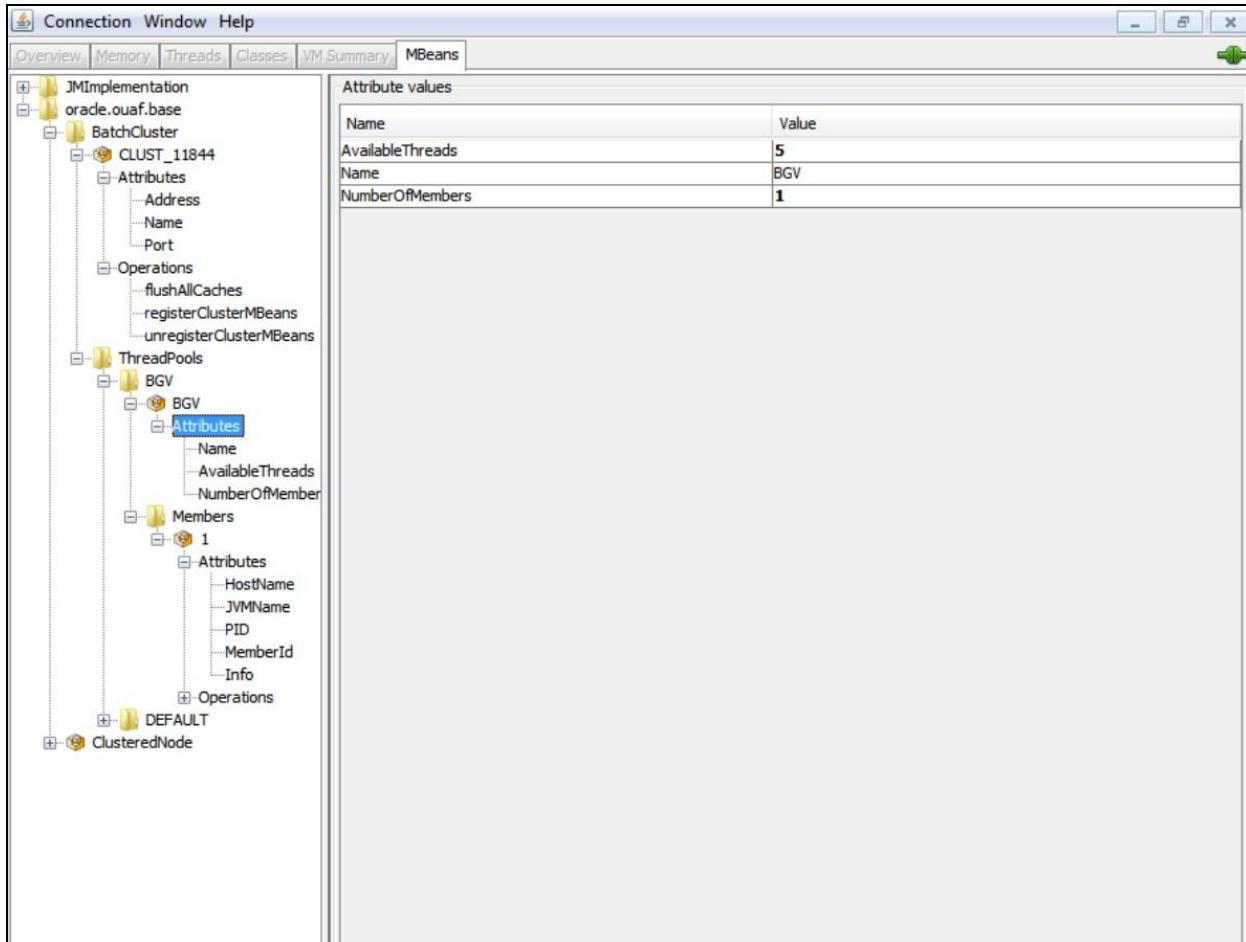

The Threadpools Mbean exposes a number of attributes:


Attribute	Comments
Name	Name of Threadpool
AvailableThreads	Number of spare threads for batch processes. The value of zero (0) indicates the threadpool is at capacity.
NumberOfMembers	Number of members/hosts defined to the threadpool

There are no operations at the threadpool level.

3.3.5 Members MBean

Note: This information is only accessible once the `registerclusterMbeans` operation is executed. This API is only available for CLUSTERED mode.

When a threadpool is executed each instance of the threadpool may have one or more members. For example, if there are a number of instances of the threadpool on a machine or across machines each instance is listed as a member. This allows low level control of the nodes in a threadpool. When accessing the API from a JSR160 compliant tool, the information and operations for each member for the threadpools are made available. For example:

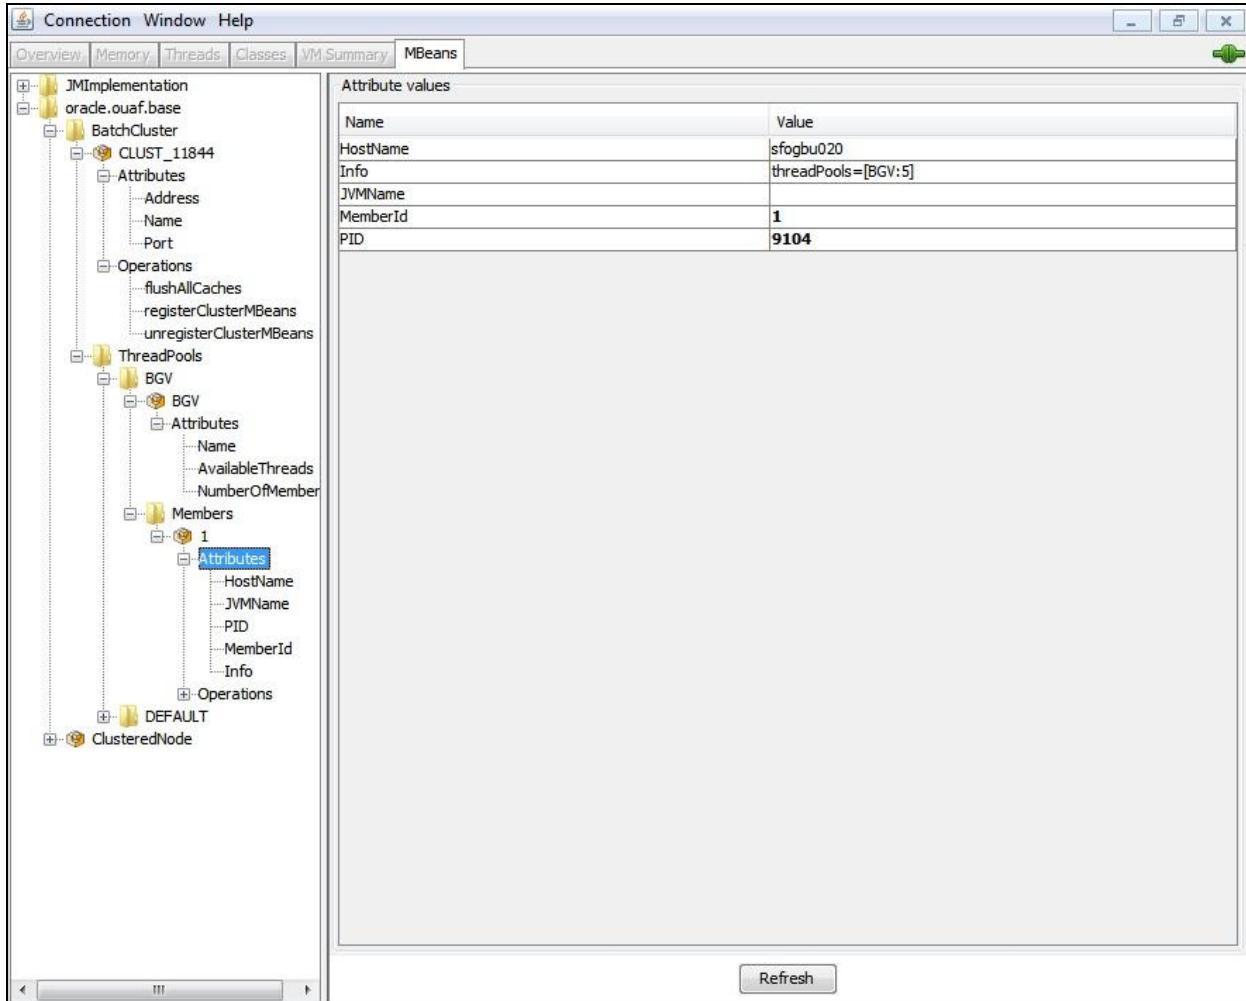

For each member the `Members` Mbean exposes a number of attributes:

Attribute	Comments
HostName	Name of Host hosting this threadpool instance
JVMName	Name of JVM assigned at runtime
PID	Unique OS Process Id for JVM
MemberId	Member Number. This number is unique across the cluster and is used to track the member internally by the framework.

Attribute	Comments
Info	Parameters used to start threadpool instance in free format.

For each member the Members Mbean exposes a number of operations:

Operation	Comments
flushAllCaches	Flush the cache for this instance
stopnode	Stop this member. This allows members to be dropped off after execution.
displayClusterCache	Raw mode cluster information. Used for development only.


3.3.6 ClusterNode Mbean

Note: This API is only available for CLUSTERED mode.

When using the online submission deamon and online batch server in non-production a ClusterNode Mbean is used. This tracks the DEFAULT threadpool which is configured as part of installation.

Note: This information is duplicated as a Threadpool Mbean instance but this Mbean is dedicated to the DEFAULT pool if it is active. This Mbean is not affected by the `registerClusterMbeans` operation.

When accessing the API from a JSR160 compliant tool, the information and operations for each member for the DEFAULT threadpool are made available. For example:

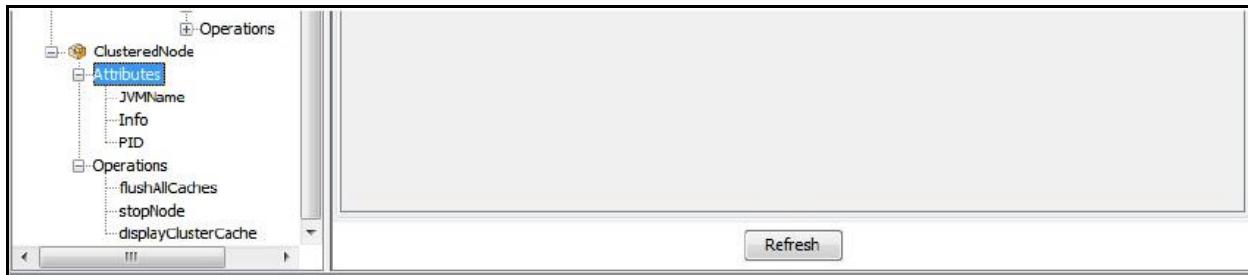

The `clusterNode` Mbean exposes a number of attributes:

Attribute	Comments
JVMName	Name of JVM assigned at runtime. This
rnfo	Information string for Threadpool
prD	as Process Id for JVM

The `ClusterNode` Mbean exposes a number of operations:

Operation	Comments
flushAllCaches	Flush the cache across the batch cluster
stopNode	Stop online batch threadpool.
displayClusterCache	Raw mode cluster information. Used for development only.

3.3.7 BatchThread Mbeans

Mbeans associated with BatchThread are created once the getJobWork method for a Java program has successfully completed. Each thread, as requested by the threadCount parameter for the batch process, will have its own MBean. A BatchThread MBean for a thread is alive for as long as it takes for the thread to complete, and automatically destroyed when the thread ends.

The batch thread number, as indicated in the MBean name, will be the current threads thread number.

- In the case of Java, these MBeans expose the running values for a thread. The records/units processed, in-error and remaining, are provided as the thread runs and updates the MBean internally.
- For a COBOL thread, if COBOL used, the values are not as detailed, since COBOL does not work in terms of work units, but some valuable information can still be obtained (e.g. elapsed time).

The Java BatchThread example below shows two threads running for batch process ZZQABAT1. The MBean name contains the thread number and count, and they show to be running in Java threads 39 and 35 respectively. The Java thread number is for uniqueness only.


The MBeans that expose the batch processes are divided into categories. The name of the MBean is constructed to indicate the type of batch process, the name of the batch process, and the thread number and count. For sake of uniqueness, the name also includes the Java thread number.

The name therefore is constructed as follows:

CCC_BBB_t_of_c.jjj

Where,

MBean Name Includes	Description
CCC	The type of MBean. This can be either BatchJob or BatchThread.
BBB	The Batch code from the Batch Control.
t_of_c	The batch thread number and count. For BatchJob types, this will just be "0". For BatchThread types, the t is the thread number, and c the thread count.
Jjj	The Java thread number, which will be unique within a batch node.

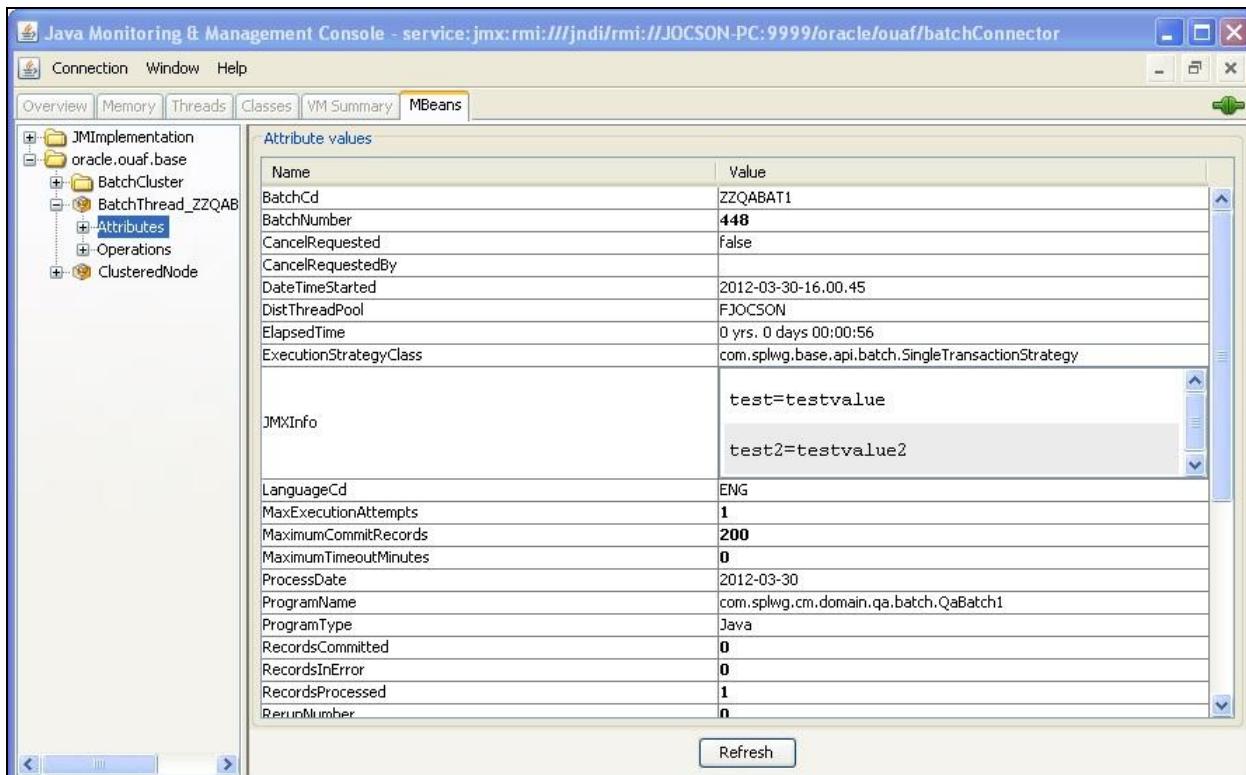

Note:

Refreshing this information will dynamically update the values.

JMX information is only displayed at active runtime and calls process can happen very fast –depending on the amount of data to be selected for the run – so the JMX console may not even detect this MBean.

The **BatchThread** MBean is accessible from the `jmxbatchclient` utility.

The **BatchThread** Mbean exposes a number of attributes:

Attribute	Comments
BatchNumber	The current batch number.
cancelRequested	True if the thread has been asked to stop running. See CancelReqeustedBy.
cancelRequestedBy	If CancelRequested=true, this will be a string indicating the workstation from where the cancellation was requested. This value will also be logged to the Batch Run Tree.
DateTimeStarted	The date and time the batch process was started.
DistThreadpool	The thread pool to which this batch process belongs.
ElapsedTIme	How long the batch process has been running.
ExecutionStrategyclass	This indicates the commit strategy followed by the program.
programName	The program name executed.

Attribute	Comments
programType	The program type: Java or COBOL.
Recordscommitted	The number of record updates that have been committed to the database. See note below.
RecordsInError	The number of records so far in error. This is what will be logged to the Batch Run Tree. See note below.
RecordsProcessed	The number of records processed so far. This is what will be logged to the Batch Run Tree. See note below.
RunType	The type of run: New Run, Restart or Rerun.
Status	Current status of the thread. Valid values are: Initializing" (very briefly in the beginning – prior to the call to getJobwork in the application class); Getting Work means it is currently in the process of selecting the work units for the batch process; Got Work means it has successfully selected the work and is in the process of initiating the threads.
workunitSize	The total number of work units for this batch process. For new and restarted runs, this will always contain the total number of work units as selected in the getJobwork method when the batch process was originally started.
workunitSizeThisRun	This is the number of work units for this particular run. For a restarted run, this value will typically be less than the above value; otherwise they will be the same.
workunitsCommitted	The number of work units that have had their work committed.
workunitsInError	The work units that have been found to be in error so far.
workunitsProcessed	The work units that have been processed so far.

Note: The "Records..." numbers are what will be used to log to the Batch Run Tree, and they are usually in step with the "WorkUnits..." values. The reason they are shown separately is because some Java batch programs manually manipulate the record counts for the Batch Run Tree. The true progress status of a thread is reflected in the "WorkUnits..." counts.

3.3.8 Adding Custom JMX Information

The JMX API allows individual background processes to add custom JMX properties to expose additional information as necessary. This feature is designed to allow developers of custom background processes to add additional information to the JMX facilities. The custom background process can access the API using the following call:

```
addJMXInfo("<parameter>", "<value>");
```

Refer to the Oracle Utilities Software Development Kit for more information about this API.

3.3.9 Cancelling Batch Processes Using JMX

While JMX can be used to obtain monitoring information it is possible to cancel threads of batch processes using the operations component of JMX. To cancel a thread the following process must be performed:

- Start the JMX console of your choice and connect to the relevant JMX port configured for the batch.
- Select the thread and batch process to be cancelled from the JMX console.
- Select the Cancel operation from the operations component of the console. The console may recognize the operations of the JMX classes and allow the actions to be processed. For example, `jconsole` will generate `cancelThread` button. Issue the action.



Note: Depending on the JMX console used, a confirmation dialog may NOT be displayed and cannot be undone once issued. Ensure that the correct thread for the batch process is selected. To cancel a batch process, ALL threads must be cancelled.

- The batch process will be marked as cancelled and stopped. The IP address of the requestor is logged in the Batch Run Tree for auditing purposes.

3.3.10 jmxbatchclient[.sh] - JMX batch command line

While the JMX client interface provided allows real time information to be displayed in a JMX browser, if a JMX browser is not used then the JMX interface may be interfaced using a command line utility. This utility is useful to allow third party products (such as batch schedulers) or other systems to control and monitor the state of the system. This JMX batch command line allows the following to be performed:

- Identify what thread pools are defined in a `threadpoolworker`
- See what active batch processes or threads are currently running
- Be able to cancel a particular thread or a batch process
- Gracefully shutdown a `threadpoolworker`
- The command line utility is in the following format:

To execute the command line, the administrator must:

- Logon to the machine running the product (any tier where the product software exists).
- Attach to the environment using the `splenvirion[.sh]` command. This sets the appropriate environment settings for the script.
- Execute the JMX Batch command line utility:
`jnxbatchclient[.sh] -j [URL] [options]`

Where [options] are:

Command Line Option	Description
-c	<p>Specifies that active threads should be cancelled. Can be used with -f option to cancel only batch processes matching the regular expression provided. For example:</p> <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> <p>Note: Cancelled threads are marked with the date, time, userid and IP address of the user who initiated the cancel command.</p> </div>
-d	Display the details of the currently active threads.
-f	<p>If a large number of threads are currently active, a filter can be supplied to only display or cancel threads that match the regex based pattern.</p> <p>For example the threadpool be filtered to show only the BAT1 with the option: -f .*BAT1.* as follows:</p> <pre>jmxbatchclient.sh -j service:jmx:rmi://jndi/rmi://myserver:9999/spl/fw/jmxConnector -f .*BAT1.*</pre> <p>would yield:</p> <pre>Options: -j service:jmx:rmi://jndi/rmi://myserver:9999/spl/fw/jmxConnector -f .*BAT1.* Connecting to service:jmx:rmi://jndi/rmi://myserver:9999/spl/fw/jmxConnector ActiveGridNode threadPools=[MYSERVER:5, LOCAL_THREAD_POOL:b9835d11f15fd71b:681ba91d:1200151a3c8:-8000:0, SCHEDULER_DAEMON_THREAD_POOL:1] BatchThread_zzQABAT1_1_of_1.31</pre>
-h	Display the available options and their descriptions.
-j	<p>JMX URL to perform the action against (Required).</p> <p>This should match the <code>spl.runtime.management.connector.url.default</code> property specified in the <code>threadpoolworker.properties</code>.</p>
-k	<p>Specifying this option will result in the cancellation of all currently running threads and the stoppage of the <code>threadpoolworker</code> process.</p> <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> <p>Note: Active threads within a cancelled <code>threadpoolworker</code> are marked with the date, time, userid and IP address of the user who initiated the kill command.</p> </div>
-l	By default, all logging information is displayed and logged using log4j. Supplying this option will result in only select information being displayed to the system output.

Command Line Option	Description
-s	Display the summary of the currently active threads in a listing format.

4. Interactive Submission (SPLBATCH)

One of the methods supported for developers is the "Interactive" method of submission. This method takes its name from the level of inactivity required during the initiation of the background process.

The idea with this method is that the background process driver program is invoked directly (via a supplied utility) and the parameters required for the batch process will be requested for input interactively. At the end of the interactivity the background process is executed and control is returned when the process is completed. Effectively you input the parameters interactively and run the background process in the foreground.

This submission method is only suggested to be used for development testing only for the following reasons:

- The process is actually run the foreground so interaction during execution is limited.
- To execute the background process a single threaded JVM is executed with the full context. This means the whole framework is loaded into memory before the actual execution is performed. This is not efficient for non-development use.
- The interactivity will not allow re-specification of incorrect values for parameters. While some validation is performed during input of parameters, full validation is performed during execution of the actual background process.

To use this method of submission the following process needs to be performed:

- Logon to the host machine using an appropriate authorized account (for UNIX/Linux it must be a member of the group used for the product).
- The environment must be attached to using the `splenvirion[.sh]` utility. For example:
`splenvirion.sh -e DEV`
- Execute the `SPLBATCH[.sh]` utility from the command line to initiate the interactive submission of the background process.
- When prompted, answer the parameter prompts using the following guidelines.
- Output is displayed to screen and batch run tree (see Batch Run Tree for further information).

4.1 Anatomy of an Interactive Submission

During the interactive submission process the following occurs:

- A Java Virtual Machine (JVM) is initiated according to the precepts in the `SPLBATCH[.sh]` utility and the configuration settings specified in the `$SPLEBASE/splapp/standalone/config` (or `%SPLEBASE%\splapp\standalone\config` on Windows) directory. Please refer to the *Oracle Revenue Management and Billing Server Administration Guide* for an explanation of the configuration settings.
- A full version of the product (including online classes) is loaded into the JVM.
- Database connections are established to the underlying database according to the `$SPLEBASE/splapp/standalone/config/hibernate.properties` (or `%SPLEBASE%\splapp\standalone\config\hibernate.properties` on Windows)

configuration file. Please refer to the *Oracle Revenue Management and Billing Server Administration Guide* for an explanation of the configuration settings.

- The parameters for the background process are prompted. For example:

Input Parameter	Description
Batch Code	Batch control for batch process. This is mandatory as it is used to determine the program to execute.
Batch Thread Number	Number of Thread to execute. This is mandatory and must be less or equal to thread limit. Usually specify 1.
Batch Thread Count	Thread limit. Usually specify 1.
Batch Rerun Number	The batch run number to rerun (Background process must support rerun numbers for this to be used). Specify 0 to ignore.
Batch Business Date. If not accepted, will use the system date	The business date in ISO format (i.e. YYYY-MM-DD). Use blank entry to use current system date.
Maximum Number of records to commit: If not accepted, the program default will be used	Commit interval. Use blank entry to use program default.
Maximum Time-out minutes: If not accepted, the program default will be used	Timeout for Oracle. Use blank entry to use program default.
User ID	Specify a valid user for security reasons.
User Password	Not applicable. Use blank entry to ignore.
Language Code	Language code used for error messages. This is mandatory. Specify ENG for English or another valid code. The valid language pack must be installed to use the selected language.
Trace Program Start (Y/N)	Enable tracing of program starts. Specify Y for Yes or N for No. This is mandatory. Usually specify N.
Trace Program Exit (Y/N)	Enable tracing of program exits. Specify Y for Yes or N for No. This is mandatory. Usually specify N.
Trace SQL (Y/N)	Enable tracing of SQL Statements. Specify Y for Yes or N for No. This is mandatory. Usually specify N.
Trace Standard Output (Y/N)	Enable tracing of debug output from programs. Specify Y for Yes or N for No. This is mandatory. Usually specify N.
Additional Parameters (Blank line to end) :	Run parname=parvalue Specify additional parameters as specified on Batch Control. Use a blank line to indicate last parameter.

- The program indicated on the batch control of the Batch Code specified is executed. For each execution the following information is output:

Output Parameter	Description
SCHEDULER ID	Internal number allocated to instance of process execution. All messages are associated with this Scheduler Id.
BATCH CD	Batch Code submitted.
BATCH THREAD NBR	Batch Thread number submitted
BATCH THREAD CNT	Thread Limit used for submission
BATCH NBR	Batch Number allocated to this execution. Value of 0 indicates that the program does not support batch numbers or current batch number is used.
BATCH BUSINESS DT	Batch Business date used for execution in YYYY-MM- DD format.

- The execution of the batch submission is also written to \$SPLOUTOUT (or %SPLOUTPUT% on Windows) in a log file named <batch_cd>.<datetime>.THR<threadnumber>.stdout and <batch_cd>.<datetime>.THR<threadnumber>.stderr where <batch_cd> is the batch code submitted, <datetime> is the date and time of the execution (in format YYYYMMDDHHMMSS.S format) and <threadnumber> is the thread number submitted.

4.2 Return Codes

The following return codes apply to the processing using this method:

Return Code	Usage
0 (zero)	Successful
Non-zero	Unsuccessful. See log files for more information.

4.3 Limitations of the Interactive Submission Method

The interactive submission method is recommended for use with development only for the following reasons:

- This method is designed for development use.
- Each thread runs within its own JVM. This is not efficient for multiple simultaneous batch processes or multiple threads.
- The prompting is interactive and designed for developers only. While it is possible to pass a parameter file containing the values for each of the prompts into the SPLBATCH[.sh] utility it is not recommended.
- Incorrectly specified values for prompts cannot be corrected. You must wait for the batch process failure to start again.
- There is no monitoring method or cancelling from the foreground execution (apart from killing the terminal session).

- JMX monitoring is not possible with this method.

5. Online Submission

One of the most important useful testing/demonstration facilities of the product is the ability to submit batch processes from the online component of the product. An authorized user can submit any batch process using an online batch submission page.

The on-line batch submission page enables you to request a specific background process to be run. When submitting a background process on-line, you may override standard system parameters and you may be required to supply additional parameters for your specific background process. After submitting your background process, you may use this page to review the status of the submission.

Basically the following process is used to submit background processes using the online submission method:

- The process to be executed is registered online as to be submitted (or queued). This marks the process execution as Pending. When you request a batch process to be submitted from on-line, the execution of the desired background process will result in the creation of a batch run. Just as with background processes executed through your scheduler, you may use the Batch Run Tree page to view the status of the run, the status of each thread, the run-instances of each thread, and any messages that might have occurred during the run.

Note: Your online submission record is assigned a status value so that you may know whether your batch process has been submitted and whether or not it has ended; however, it will not contain any information about the results of the background process itself. You must navigate to the Batch Run Tree page to view this detail.

- A background process is scheduled (using a `submitbatch` script (run in `Cron`) or using the submission daemon) that will pickup any Pending background process executions and execute them. When you save a record on the batch process submission page, the batch process does not get submitted automatically. Rather, it saves a record in the batch process table. A special background process will periodically check this table for pending records and will execute the batch process. This background process will update the status of the batch process submission record so that a user can determine when their batch process is complete.

Note: At installation time, your system administrator will set up this special background process or configure the scheduler daemon to periodically check for pending records in the batch process submission table. Your administrator will define how often the system will look for pending records in this table.

It should be noted that this special background process only submits one pending batch process submission record at a time. It submits a batch process and waits for it to end before submitting the next pending batch process.

Note: If you request a batch process to be run multi-threaded, the special background process will submit the batch process as requested. It will wait for all threads to complete before marking the batch process submission record as ended.


During execution the status of the execution in the batch run tree is updated as well as the original submission screen. If you wish the system to inform you when the background process completes, you may supply your email address. The email you receive will contain details related to the batch process output; similar to the batch process results you would see from the batch run tree.

Note: This assumes that during the installation process, your system administrator configured the system to enable email notification. Your administrator may also override the amount of detail included in the email notification.

5.1 Using Online Submission

The process of submitting using the online method is as follows:

- Logon to the product environment using your browser. Use the appropriate URL.
- Navigate to **Main** → **Batch** → **Batch Job Submission**.

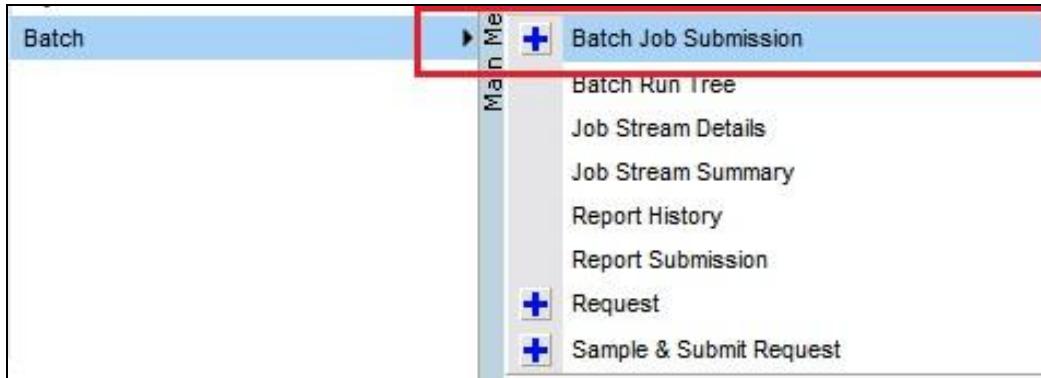

- Find the batch control you wish to submit. You can use the Batch Code or the Description of the batch process to find it. It is possible to submit any valid batch process in the list.

Batch Control	Description	Next Batch Nbr	Last Update Instance	Accumulate All Instances	Last Update Time
F1-ARQPR	Request Monitor	1	0	<input type="checkbox"/>	07-07-2010 12:16P
F1-AVALG	Application Viewer - Generate Algorithms	5	0	<input type="checkbox"/>	07-07-2010 12:14P
F1-AVBT	Application Viewer - Generate Batch Control	6	0	<input type="checkbox"/>	07-07-2010 12:13P
F1-AVMO	Application Viewer - Generate MOs	5	0	<input type="checkbox"/>	07-13-2010 03:28P
F1-AVTBL	Application Viewer - Generate Table data	7	0	<input type="checkbox"/>	07-07-2010 12:12P
F1-AVTD	Application Viewer - Generate To Do Types	6	0	<input type="checkbox"/>	07-16-2010 02:19A
F1-BUNPR	Bundle Monitor	1	0	<input type="checkbox"/>	01-27-2009 07:16P
F1-DTDOM	Outbound Message Error To Do Entry Cleanup	1	0	<input type="checkbox"/>	07-02-2010 03:31P
F1-FCTRN	Fact Monitor	24	0	<input type="checkbox"/>	
F1-FKVBP	Foreign Key Validator	2	0	<input type="checkbox"/>	
F1-FLUSH	Flush All Caches	2	0	<input type="checkbox"/>	
F1-LANG	New Language	1	0	<input type="checkbox"/>	

- Fill in the prompts on the screen with the appropriate values.

Prompt	Comments
Batch Job Id	The Batch Job ID is a system generated random number that identifies a particular submission.
Batch Code	To submit a batch process, choose the Batch Code for the process you wish to submit.

Prompt	Comments
Batch Thread Number	<p>Thread number is used to control whether a background processes is run single threaded or in multiple parallel threads. It contains the relative thread number of the process. For example, if the process X has been set up to run in 20 parallel threads, each of the 20 instances receives its relative thread number (1 through 20).</p> <p>Note: Not all processes may be run multi-threaded.</p> <p>Many of the system background processes may be run multi-threaded. When submitting a background process on-line, you may also run a multi-threaded process or run a single thread of a multi-threaded process. The fields Thread Count and Thread Number on the batch submission page control the multi-threaded process requests:</p> <ul style="list-style-type: none"> • To run a multi-threaded process, indicate the number of threads in Thread Count and enter 0 in the Thread Number. For example, to run the batch process XXX with 10 threads, enter Thread Count = 10 and Thread Number = 0. This will execute all 10 threads of batch process XXX. • To run a single thread in a multi-threaded process, indicate the number of threads in Thread Count and indicate the Thread Number you would like to run. For example, to run only thread 1 out of 10 threads for batch process XXX, enter Thread Count = 10 and Thread Number = 1. This will execute thread 1 out of 10 for XXX. • To run a process as a single thread, enter Thread Count = 1 and Thread Number = 1. This will execute the background process single-threaded. <p>Note: When running a multi-threaded process, the completion of the last of the threads will "mark" the batch process submission record as ended.</p>
Batch Thread Count	Thread count is used to control whether a background processes is run single threaded or in multiple parallel threads. It contains the total number of threads that have been scheduled. For example, if the billing process has been set up to run in 20 parallel threads, each of the 20 instances receives a thread count of 20.
Batch Rerun Number	Rerun number is only used for background processes that download information that belongs to given run number. It should only be supplied if you need to download an historical run (rather than the latest run).
Batch Business Date	Business date is only used for background processes that use a date in their processing. For example, billing using the business date to determine which bill cycles should be downloaded. If this parameter is left blank, the system date is used at the time the background process is executed.
Override Nbr Records To Commit and Override Max Timeout Minutes	These parameters are optional and override each background process's Standard Commit Records and Standard Timeout Minutes (each background process's Standard Commit Records/ Standard Timeout Minutes is documented in the list of system background processes).

Prompt	Comments
User ID	Enter the user ID for the background process. This field defaults to the id of the current user.
Language Code	Language code is used to access language-specific control table values. For example, error messages are presented in this language code.
Email	<p>If you wish the system to notify you when the batch process is complete, enter your Email ID. This field defaults to the email address for the current user, if populated on the user record.</p> <p>Note: SMTP support must be configured to operate.</p>
Desired Execution Date/Time	The Desired Execution Date/Time defaults to the current date and time. Override this information if you wish the background process to be executed at some future date and time. If you wish to request a batch process to be submitted in the future, you may do so when creating your batch process submission record by entering a future submission date. The special background process, which looks for pending records in the batch process submission table, will only submit batch processes that do not have a future submission date.
Batch Job Status	This indicates the current status of the batch process.
Program Name	The Program Name associated with the batch control code is displayed. This is used for tracking purposes.
Trace Program Start	Toggle this switch on if you wish a message to be written whenever a program is started.
Trace Program Exit	Toggle this switch on if you wish a message to be written whenever a program is exited.
Trace SQL	Turn on this switch if you wish a message to be written whenever an SQL statement is executed.
Trace Output	Turn on this switch if you wish a message to be displayed for special information logged by the background process.

Note:

The trace parameters are typically only used during QA and benchmarking.

The information displayed when the trace output switch is turned on depends on each background process. It is possible that a background process displays no special information for this switch.

The location of the output of this trace information is defined by your system administrator at installation time.

- If additional parameters have been defined for this background process on the Batch Control page, the Parameter Name, Description and an indicator of whether or not the parameter is Required are displayed. Enter the desired Parameter Value for each parameter.

Each of the batch processes has, as part of its run parameters, a preset constant that determines how many errors that batch process may encounter before it is required to abort the run. You can override this constant with an optional additional parameter (`MAX-ERRORS`). The input value

must be an integer that is greater than or equal to zero. The maximum valid value for this parameter is 999,999,999,999,999.


- Press the **Save** key. Once you have entered all the desired values, **Save** the record in order to include it in the queue for background processes.
- If you wish to duplicate an existing batch process submission record, including all its parameter settings, display the submission record you wish to duplicate and use the **Duplicate and Queue** button. This will create a new Batch Job Submission entry in pending status. The new submission entry will be displayed.
- If you wish to cancel a Pending batch process submission record, use the Cancel button. The button is disabled for all other status values.

Note: Saving a record on this page does not submit the batch process immediately. A special background process will run periodically to find pending records and submit them. Depending on how often the special process checks for pending records and depending on how many other pending records are in the 'queue', there may be a slight lag in submission time. If the desired execution date/time is close to midnight, it is possible that your batch process will run on the day after you submit it. If you have left the business date blank in this case, keep in mind that your business date would be set to the day after you submit the batch process.

After saving the process in the batch submission screen the following process is performed:

- The execution of the process is registered within a batch run table in Pending status. Prior to execution the user may cancel the batch process by pressing the cancel button. This updates the process status to Canceled.
- At installation time, the product administrator sets up an additional process, the online daemon (or `submitbatch[.sh]` cron utility see [submitbatch](#)) which polls the batch run table every x minutes (where x is the parameter used on the command line).
- It processes each Pending process in sequence, using FIFO and at process start updates the batch run table with a status of Started. This indicates the process is executing. The user cannot cancel the process after it has been Started. At this time the batch run tree is populated with the run information as it is executing, including restart information and threading.
- If the process is successful or errored, the batch runs information with an Ended status. You must check the Batch Run tree to see if has been successful.


The following figure illustrates this process:

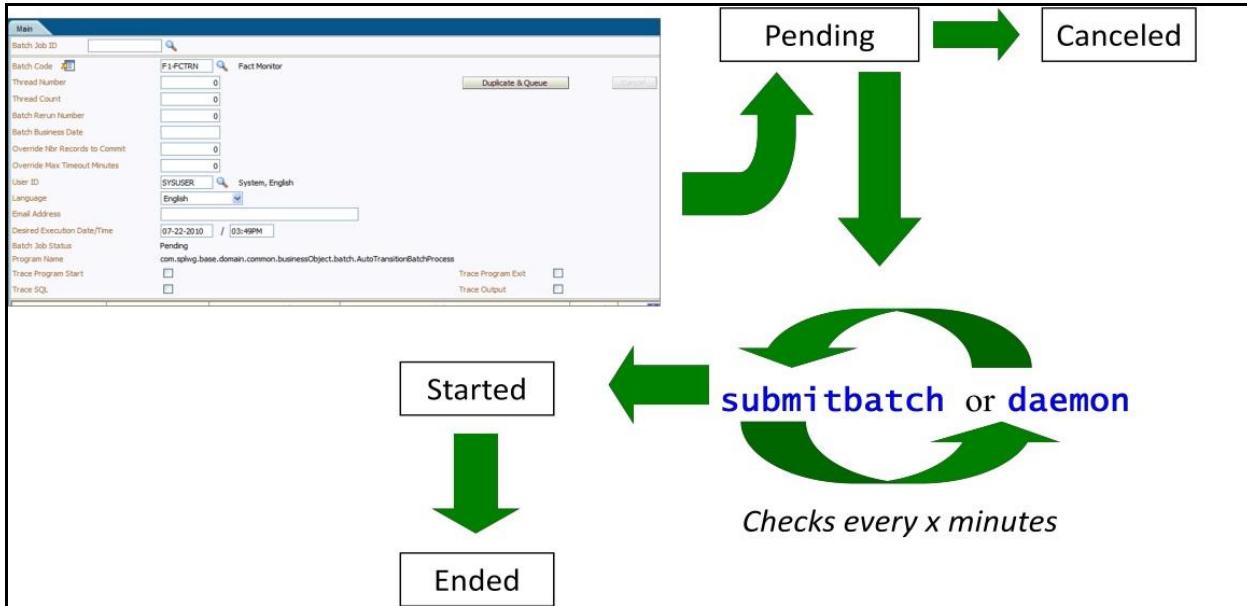

5.2 Online Batch Daemon

During the installation of the Business Application Server component of the product, it is possible to configure part of the Business Application Server runtime to become a batch daemon. This means that part of the JVM used by the Business Application Server can be used as a daemon (or "listener") for processes submitted online.

If configured, the Business Application executes an internal process to poll for "Pending" processes registered using the online submission screen. This batch daemon then executes the batch process within the Business Application Server JVM. The daemon can be configured to limit the impact on the online system by limiting the number of concurrent threads that can be executed. The following diagram illustrates this process:

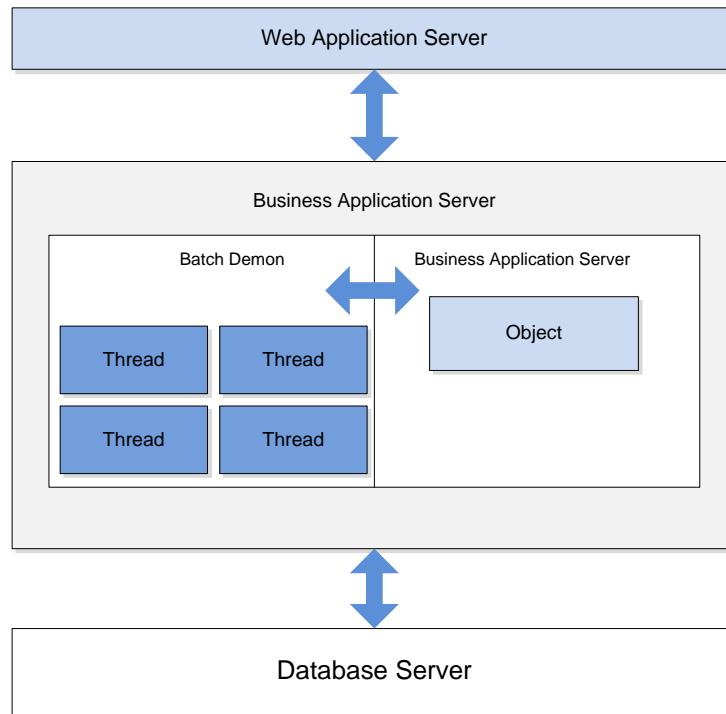

At installation time the installer asks additional questions to disable/enable the batch daemon:

...

Batch Server Enabled: false

Batch Threads Number: 5

Batch Scheduler Daemon: false

...

The three settings used can be configured using the following guidelines:

- **Batch Server Enabled** – Enable batch to be run within the JVM.
- **Batch Threads Number** – Maximum number of threads to limit background processes to within the JVM if Batch Server Enabled is set to Yes. This number of threads represents the number of threads surrendered from the main JVM thread pool and allocated to running batch exclusively. The default is 5.
- **Batch Scheduler Daemon** – Enable the daemon to check for pending batch processes in the Batch Submission or inbuilt batch process scheduler². If a pending batch process is found it is passed to the Batch Server for execution.

² The inbuilt batch process scheduler is NOT covered in this guide. Refer to the online documentation provided with your product for details of this facility (if provided with your product).

The valid combinations of these settings are as follows:

Batch Server Enabled	Batch Scheduler Daemon	Comments
Yes	Yes	Batch Daemon runs on this Business Application Server and any batch processes found by the daemon are executed on this Server.
Yes	No	Batch Daemon does not run on this Business Application Server but this Business Application Server can execute batch programs. It is assumed that another business application server has been allocated as a batch scheduler daemon.
No	Yes	Batch Daemon does run on this Business Application Server but Batch submission does not run on this Business Application Server. It is assumed that another business application server has been allocated as a batch server.
No	No	Batch does not execute on this Business Application Server and no Batch Daemon has been allocated to this

5.2.1 Guidelines for using the Batch Server/Batch Scheduler Daemon

This facility is not applicable to all environments and all situations at a site, the following guidelines will assist in the appropriate use of the facility:

- If the environment is going to use the online submission (or inbuilt scheduler) then the Batch Server and Batch Scheduler Daemon should be enabled for Business Application Server allocated to the environment. If multiple Business Application Servers are allocated to the same environment, then there should only be one server with the Batch Server enabled set to Yes and only one server with the Batch Scheduler Daemon set to Yes (they can be the same server or different servers). This setting is common for non-production environments.
- If the environment is not going to use the online submission, then both Batch Server Enabled and Batch Scheduler Daemon should set to No. This is a common setting for Production as online submission is usually disabled in production.
- Online submission and scheduling (if the product includes the inbuilt scheduler) are not recommended for use in Production environments.

5.2.2 Logging using the Batch Server/Scheduler Daemon

The execution of any batch submission is also written to \$SPLOUTOUT (or %SPLOUTPUT% on Windows) in a log file named <batch_cd>.<datetime>.THRD<threadnumber>.stdout and <batch_cd>.<datetime>.THRD<threadnumber>.stderr where <batch_cd> is the batch code submitted, <datetime> is the date and time of the execution (in format YYYYMMDDHHMMSS.S format) and <threadnumber> is the thread number submitted.

5.2.3 Configuring JMX with the Batch Server/Scheduler Daemon

The executing threads Batch Server can be monitored using the JMX adapter by adding the following lines to the \$SPLBASE/etc/conf/root/WEB-INF/classes/spl.properties (or %SPLBASE%\etc\conf\root\WEB-INF\classes\spl.properties on Windows) file:

```
spl.runtime.management.rmi.port=<port>
spl.runtime.management.connector.url.default=service:jmx:rmi://jndi/rmi
://<server>:<port>/spl/fw/jmxConnector
java.rmi.server.hostname=<server>
```

Where,

- <server>: Name of the host (or IP address) where the Business Application Server is located.
- <port>: A unique port allocated for the JMX agent to broadcast on. This port must be unique to the host it is located upon.

To implement the change the `initialSetup[.sh]` commands must be executed. Additionally on platforms when a WAR/EAR file is used, the WAR/EAR file must be redeployed. Refer to the *Oracle Revenue Management and Billing Server Administration Guide* for details.

5.3 submitbatch - Command based daemon

Note: This facility is documented for completeness only; it is recommended that the online submission daemon be used in preference to this facility.

For backward compatibility purposes, there is a facility that can be invoked on the command line (or in cron, or similar, facility) to act as an alternative to the online scheduler daemon. This facility will run a polling script that will detect a pending process and invoke the interactive method (in background) to execute the process.

This can be configured using the following command line

```
submitbatch[.sh] [-e <env>] [-s <seconds>] [-h] [-k]
```

Where,

Command Line Option	Description
<code>-s <seconds></code>	Run as daemon and pause <seconds> seconds between loops of checking whether there is more work to do. Without the <code>-s</code> it runs one batch process and stops (recommended if used with cron).
<code>-k</code>	Stop the background batch processor
<code>-v</code>	Print out verbose messages
<code>-e <env></code>	Dummy parameter that is only used to make the process more identifiable so 'ps -edf' can be used to determine which submitbatch script belongs to which environment (<env>).
<code>-h</code>	Print command line help.

6. External Scheduler Submission

The Oracle Utilities Application Framework exposes a callable interface that allows scheduling and execution of to be controlled by an external scheduling product. A number of utilities `threadpoolworker` and `submitjob` have been included in the product to allow external schedulers (or a command line) to establish a JVM to run background processes and then submit background process to that JVM.

Note: The words "node" and "JVM" are interchangeable in this section.

6.1 Concepts

At a site implementing the product, the batch processes to be executed to support the business as well as perform expected maintenance on the system needs to be scheduled, managed and executed from a central point. In most sites, this is done by using a third party batch process scheduler that controls the scheduling and execution of any batch processes across a site.

To support the use of such a scheduler with any Oracle Utilities Application Framework based product(s) a number of scripts and related configuration files have been provided to allow the scheduler to execute the process batch processes.

The scripts and configuration files allows for three fundamental facilities that can be used by external scheduling tools:

- The interface is command line based (it can also be invoked using a java based API see the product javadocs within AppViewer for a description of the interface) which most external scheduling tools support.
- The command based utilities return a standard return code to indicate the batch process has been successful or has been unsuccessful. Actions dependent on return code within the scheduler can then be configured.
- The logs within the utilities provided are in a common format that can be interrogated by the external scheduler to provide finer grained actions (especially for unsuccessful executions).

For additional advice about interfacing external schedulers with the product refer to the [Batch Best Practices whitepaper](#) at KB Id 836362.1 on [My Oracle Support](#).

6.2 `threadpoolworker.sh` Utility

This script starts a long-lived worker node (JVM) in a distributed batch grid environment. Once successfully started, this process will accept submissions from lightweight submitter nodes and execute the batch processes as requested by the submitters. A worker JVM may also host a scheduler daemon, which, if activated inside a worker, will poll for batch process submission requests from the web application that were done via the Batch Job Submission transaction.


There are three modes to execute background processes using this facility `CLUSTERED`, `DISTRIBUTED` and `THIN`.

- In `THIN` mode, the batch program is executed in a stand-alone JVM. This means that a full application context is established before the application program is invoked, and destroyed when the execution ends. If a batch process is submitted in multiple threads, each thread requires its own context, in its own separate JVM. `THIN` mode is typically used by developers to isolate their tests from other developers and is not recommended for production use.

- In **DISTRIBUTED** mode, at least one worker JVM must be started and left running to poll for work requests from submitter JVMs. Worker JVMs are also known as grid nodes, because multiple workers can be started to load-balance batch. **DISTRIBUTED** mode is the existing, classic way that customers have been running their batch processes in past releases of the Oracle Utilities Application Framework. In this mode, one or more batch workers are started and left to run as long-running, background tasks. Each worker can be individually configured to process n number of threads concurrently, and this can further be grouped into thread pools. The workers also have the option to host a batch process scheduler daemon, whose role is to listen for and execute online batch process submissions (via the Batch Job Submission page for example).
- In **CLUSTERED** mode, as with **DISTRIBUTED** at least one worker JVM must be started. These worker JVM's may be standalone or clustered with appropriate batch. The difference between **CLUSTERED** and **DISTRIBUTED** is that in a **CLUSTERED** setup, worker and submitter JVMs (members) are more tightly joined in a Coherence based cluster, resulting in better management of various events, such as workers abruptly stopping (because of program crashes for example), batch processes getting cancelled, etc. As long as at least one member is active in a cluster, batch processes can be appropriately handled in the case of unexpected interruptions.

It is highly recommended that customers use the **CLUSTERED** mode.

The figure below summarizes the approaches of different execution modes:

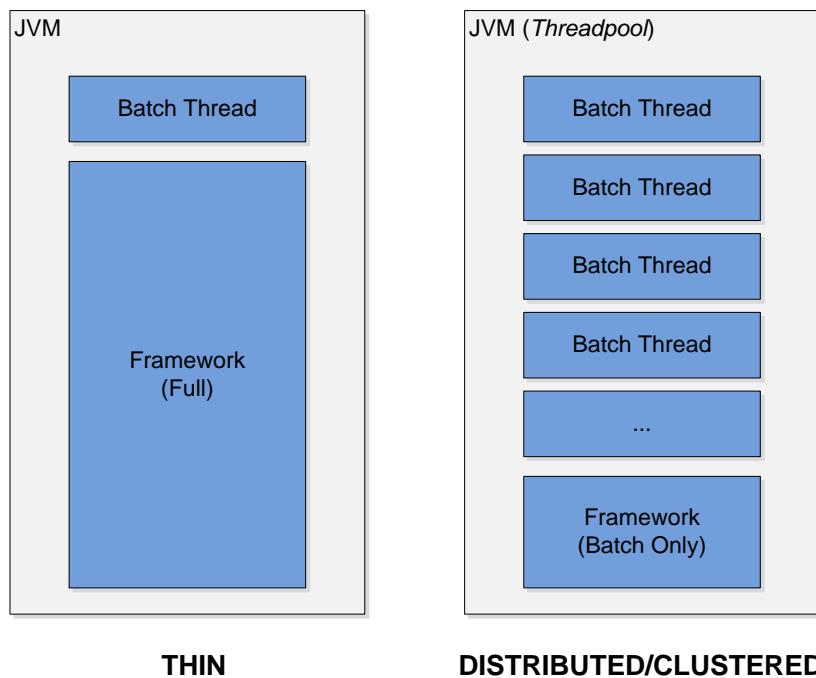

If only **THIN** submissions are ever used, script `threadpoolworker[.sh]` does not have to be executed. If this is the case, batch processes can be submitted in **THIN** mode from the command-line using script `submitjob[.sh]`.

This script may be executed more than once if multiple workers are required. This may be for performance or load-balancing purposes, or to simply provide separate thread pool configurations in a distributed grid. Worker JVMs in a grid can be started on different machines (even if the platforms differ), provided they all access the same database and contain the runtime appropriate for the

architecture. If the web application is also batch- enabled, the worker hosted by the web application then becomes one node among the nodes that were started as described above.

If multiple worker nodes, including the web application, are configured to host a scheduler daemon, only one of those will be the active daemon. The others are dormant until the active one becomes unavailable for some reason, for example if the JVM is killed, in which case one of the dormant ones will automatically become active.

Note: A single product environment can be either CLUSTERED or DISTRIBUTED. Mixing JVMs that start up in CLUSTERED and DISTRIBUTED mode will have unpredictable results.

6.2.1 threadpoolworker and F1_TSPACE_ENTRY

The DISTRIBUTED and CLUSTERED approaches use a database tuple space table `F1_TSPACE_ENTRY` for operations and management. The role of this table varies differently depending on the execution mode of the worker or submitter.

In DISTRIBUTED mode, whenever a `threadpoolworker` or `submitjob` starts an entry is created in the `F1_SPACE_ENTRY` table. This is used by the `threadpoolworker` to advertise that it is ready to accept work (known as a `THREAD_OFFER`) using a lease (to indicate when it is to check back with `F1_TSPACE_ENTRY`). If the `threadpoolworker` finds work in the `F1_TSPACE_ENTRY` it issues a `GRID_WORK` record grabbing the submitters work and executes the indicated batch process. After the batch process has ended it issues a `WORK_ENDED` against the submitter record in the `F1_TSPACE_ENTRY` table and updates the `threadpoolworker` entry to `THREAD_OFFER` again to accept more work. The submitter process creates an `F1_TSPACE_ENTRY` table of `WORK_OWNER` to indicate it waiting to be executed and waits. When the `threadpoolworker` accepts the submitters work it has marked the submitters records as `GRID_WORK` indicating it is processing the task. At this time, the submitted polls regularly waiting for the `WORK_ENDED` message to indicate the work has been completed.

The issues with this type of processing are when there are issues with the `threadpoolworker` or submitter. If these processes fail, then the `F1_TSPACE_ENTRY` does not adequately reflect the state of the processes. This may cause internal synchronization issues in some cases. A common technique used by sites when this happens is to clear the offending `F1_TSPACE_ENTRY` entries manually or truncating the table altogether and reissue the work. The latter is dangerous if there is work still running in the product.

The CLUSTERED mode was created to address this issue. It uses `F1_TSPACE_ENTRY` for some persistence but each `threadpoolworker` in the cluster is aware of the other nodes and the work that is allocated to it. Any node can be used in execution of processes and in the case of submitter failure the node will communicate to the appropriate process to keep the relevant parties informed. This also occurs when a `threadpoolworker` failure where the other nodes inform the relevant parties involved of the failure.

6.2.2 threadpoolworker.properties configuration file

To use the `threadpoolworker` utility a configuration file must be created to specify the attributes of the JVM. The `threadpoolworker.properties` file should be placed in the `$SPLEBASE/etc` directory (or `%SPLEBASE%\etc` directory on Windows).

The properties file contains the default properties for `threadpoolworker`. The following sample illustrates the values:

```

com.splwg.grid.distThreadPool.threads.DEFAULT=5
com.splwg.grid.distThreadPool.threads.LOCAL=0
com.splwg.batch.scheduler.daemon=true
spl.runtime.management.rmi.port=9090
spl.runtime.management.connector.url.default=service:jmx:rmi://jndi/rmi
://:{host}:{port}/spl/fw/jmxConnector
com.splwg.grid.executionMode=CLUSTERED

```

The following table describes the parameters:

Parameter	Comments
com.splwg.grid.distThreadPool.threads.<poolname>	Number of Threads for pool <poolname>.
com.splwg.batch.scheduler.daemon	Whether the node will act as a scheduler daemon.
com.splwg.grid.executionMode	Mode of the threadpoolworker. Valid values are: THIN, DISTRIBUTED or CLUSTERED.
spl.runtime.management.rmi.port	JMX RMI Port to use. If omitted, JMX is disabled.
spl.runtime.management.connector.url.default	Default JMX service. Required if rmi.port is specified. In the example, above the URL format is shown. Substitute {host} for hostname of machine and {port} for unique RMI port.
com.splwg.batch.submitter.maxExecutionAttempts	This specifies how many times the worker(s) in the grid should attempt execution of the work submitted by this submitter. If the application program crashes and brings down the worker JVM with it, this parameter is designed to prevent any other worker nodes in the grid from picking up this same bad work request and thereby spreading the "poison work" around the grid, crashing JVMs along the way and ultimately bringing the batch grid down completely. The default is set to 1 and should be left like that unless there is a good reason to change it

This file should be modified for site-specific values. For example, the scheduler daemon may not be required to be activated by default, in which case property `com.splwg.batch.scheduler.daemon` should be changed to false (or removed entirely to use the system default).

6.2.3 Multi-cast or Uni-cast

The CLUSTERED mode can use multi-cast or uni-cast to communicate across the threadpoolworker nodes in a cluster. By default CLUSTERED mode uses a multicast protocol to discover other nodes when forming a cluster. For information about multi-cast and uni-cast see the following sites:

- Discussion of protocols - <http://wiki.tangosol.com/display/COH35UG/Network+Protocols>
- Advanced Configuration of the multi-cast listener - <http://wiki.tangosol.com/display/COH35UG/multicast-listener>

- Advanced Configuration of the uni-cast listener - <http://wiki.tangosol.com/display/COH32UG/unicast-listener>

6.2.4 Well Known Addresses

The default option at installation is use of multicast, if multicast is not an option; the well-known-addresses feature may be used. It requires manual edits of the tangosol-coherence-override.xml configuration file.

The WKA properties specify one or more "well-known" nodes (JVMs) that are used to start a cluster and are likely to be available for other nodes to join. These well-known nodes are used by the other nodes to find their way into the cluster without the use of multicast. Note that only one of these nodes is required to be up; they don't all have to be up at the same time.

The following example shows a WKA configuration.

tangosol-coherence-override.xml on server test1 and test2.

```
<coherence>
  <cluster-config>
    <unicast-listener>
      <well-known-addresses>
        <socket-address id="1">
          <address>test1</address>
          <port>19000</port>
        </socket-address>
        <socket-address id="2">
          <address>test2</address>
          <port>38000</port>
        </socket-address>
      </well-known-addresses>
    </unicast-listener>
    <service-guardian>
      <service-failure-policy>logging</service-failure-policy>
      <timeout-milliseconds>86400000</timeout-milliseconds>
    </service-guardian>
  </cluster-config>
```

```

<logging-config>
  <destination>log4j</destination>
  <severity-level>S</severity-level>
</logging-config>
...
</coherence>

```

This example defines two `threadpoolworker` JVMs as WKA nodes:

- test1, port 19000
- test2, port 38000

With at least one of these two `threadpoolworkers` available, any other node that wants to join the cluster will be able to, provided that node s configuration specifies the same list of WKAs.

This is illustrated with the `submitbatch.properties` example, which is what all submitters will use. The `wka` properties reference the two WKA worker nodes, which allow it to join the cluster.

For further details, refer to <http://wiki.tangosol.com/display/COH35UG/unicast-listener>.

6.2.5 `threadpoolworker[.sh]` command line options

Note: The appropriate environment has to be attached to before this script can be executed (i.e. `sp1environs[.sh] -e <environment>` has to be run), unless the script is directly invoked from the Windows explorer by double-clicking on it. In that case it will automatically attempt to attach to the environment that owns the bin directory in which it is located and then prompt for options.

The following options can be specified when executing script `threadpoolworker`.

`threadpoolworker[.sh] [-d] [-e] [-h] [-i] [-J] [-p] [-Q] [-R] [-s]`

Where command line options are:

Command Line Option	Description
<code>-d <y/N></code>	Whether the node is acting as a scheduler daemon. Specify <code>N</code> for No and <code>Y</code> for Yes. If you are already using a scheduler daemon in the online system or are not using online submission then set this to <code>N</code> . Default is <code>N</code> .
<code>-e <DISTRIBUTED CLUSTERED></code>	Execution mode for this threadpool. If <code>CLUSTERED</code> is the threadpool will join the cluster specified in the <code>threadpoolworker.properties</code> file.
<code>-h</code>	Show command line help. List the available options and their descriptions. It is formatted for a 121- column width display. The information is not logged.

Command Line Option	Description
-i <RMI Port>	<p>Override port number for JMX. If specified with -R, this number will be used only to substitute applicable URL {port} references. This option will not add any new RMI/JMX properties - it can only be used to override existing ones. This option specifies the port number to:</p> <ul style="list-style-type: none"> • Use when the framework starts an RMI Registry and • Substitute in all JMX Connector URL {port} references.
-J	<p>Do not start JMX monitoring. For each property prefixed by <code>spl.runtime.management.connector.url</code> that is defined with the default set of properties (e.g. in the <code>threadpoolworker.properties</code> file), the framework will start a JMX Connector for the specified URL. This activates JMX monitoring inside the worker node so that a client JMX console can be used to monitor and manage active threads. If this option is specified, the framework will not start any JMX connectors.</p>
-l2 <READ_ONLY READ_WRITE OFF>	<p>Enable or disable batch caching. Default: <code>READ_WRITE</code>. <code>OFF</code> and <code>READ_ONLY</code> are reserved for specific processes.</p>
-l <label>	<p>Manage threadpools with <label>. Use with <code>BatchEdit</code>.</p>
<name-value, name-value, ...>	<p>Thread pool(s) offered by this worker node. Consists of one or more name=value pairs, where "name" is the name of the pool and "value" the number of threads offered in the pool. For example, <code>DEFAULT=5,ONLINE=3</code></p>
-Q	<p>Preview the properties that would be active for this run. Used for testing. Preview the properties that would be in use for the run without actually running the application. Specify other options along with this option to show how they would merge with, override or substitute the default properties. The information is not logged.</p>
-R	<p>Do not start a local RMI registry. If property <code>spl.runtime.management.rmi.port</code> is defined as a default property (e.g. in the <code>threadpoolworker.properties</code> file), the batch framework will attempt to start an RMI registry on the given port number. This option can be used to suppress the automatic RMI registry startup. It may be required if an externally started RMI registry is already running.</p> <div data-bbox="652 1657 1411 1763" style="border: 1px solid black; padding: 5px;"> <p>Note: If this option is used, the RMI port number supplied through the <code>-i</code> option is only used for substitution in the JMX Connector URLs.</p> </div>
-s <space name>	<p>Space name for "hard partition" of workers. Default is <code>MAIN</code>. Reserved for internal use only.</p>

When `threadpoolworker` is invoked, the command-line options will alter its default configuration. The default configuration options come from either internal system defaults or the `threadpoolworker.properties` file described above.

The properties are overridden in the following order:

1. The `threadpoolworker.properties` supersedes the internal system defaults.
2. The command-line options supersede the defaults in `threadpoolworker.properties` and the internal system defaults.

Example 1

Assuming we have the above set of properties in `threadpoolworker.properties` and script `threadpoolworker` is invoked as follows:

```
threadpoolworker[.shJ -d Y
```

This will replace the default "daemon" property to "N" (i.e. false) so that the properties now look as follows:

```
com.splwg.grid.distThreadPool.threads.DEFAULT=5
com.splwg.grid.distThreadPool.threads.LOCAL=0
com.splwg.batch.scheduler.daemon=false
spl.runtime.management.rmi.port=9999
spl.runtime.management.connector.url.default=service:jmx:rmi:///jndi/rmi
://:{host}:{port}/spl/fw/jmxConnector
```

6.2.6 tpwlog4j.properties

Note: This log file should not be altered unless specified. The generated configuration file has all the recommended settings for all sites.

The `threadpoolworker` utility logs information to `$SPLOUTPUT/threadpoolworker.<datetime>.log` (or `%SPLOUTPUT%\threadpoolworker.<datetime>.log`) where `<datetime>` is the date and time in `YYYYMMDDHHMMSS` format of the start of the node. This configuration file is provided in the `$SPLBASE/etc` directory (or `%SPLBASE%\etc` directory on Windows).

This is a standard log4j properties file, but declares two appenders specifically for `threadpoolworker`:

1. the console and
2. a file in the products `$SPLOUTPUT` (or `%SPLOUTPUT%` on Windows) directory.

This log4j configuration allows the worker's output to be logged to the command prompt window as well as a log file. This file should not be altered unless desired.

The product uses the log4j Java classes to centralize all log formats into a standard format. The details of the configuration settings and log4j itself are available at <http://logging.apache.org/log4j/> or <http://en.wikipedia.org/wiki/Log4j>.

6.2.7 Automatic Log Rotation

By default the `threadpoolworker.log` file is appended to while the `threadpoolworker` is active. If the `threadpoolworker` is long running and the log needs to be automatically rotated on a daily basis the following changes should be applied to the `workersubmitterlog4j.properties` file:

Replace:

```
...
### F1 is set to be a FileAppender.
log4j.appenders.F1=org.apache.log4j.FileAppender
```

...

with

```
### F1 is set to be a RollingFileAppender
log4j.appenders.F1=org.apache.log4j.DailyRollingFileAppender
log4j.appenders.F1.DatePattern=''.yyyy-MM-dd
```

Refer to <http://logging.apache.org/log4j/1.2/index.html> for additional options.

6.2.8 Return Codes

The following return codes apply to the processing using this method:

Return Code	Usage
0 (zero)	Successful
Non-zero	Unsuccessful. See log files for more information.

6.3 submitjob[.sh]

The `submitjob[.sh]` utility provides a means for the scheduler to submit a batch process. It can be invoked from a command prompt, Windows explorer (on Windows platforms) or a 3rd party scheduler. This script can be used to submit the batch process to an active `threadpoolworker` process, or to run it in a full-context standalone JVM.

6.3.1 submitbatch.properties Configuration File

To use the `submitjob[.sh]` utility a configuration file must be created to specify the global attributes of all the batch processes. The `submitbatch.properties` file should be placed in the `$SPLEBASE/etc` directory (or `%SPLEBASE%\etc` directory on Windows).

The properties file contains the default properties for `threadpoolworker`. The following sample illustrates the values:

```
com.splwg.grid.executionMode=DISTRIBUTED
com.splwg.batch.submitter.distThreadpool=DEFAULT
com.splwg.batch.submitter.promptForvalues=false
com.splwg.batch.submitter.rerunNumber=0
com.splwg.batch.submitter.threadNumber=0
com.splwg.batch.submitter.threadcount=1
```

```
com.splwg.batch.submitter.maximumcommitRecords=200
com.splwg.batch.submitter.userId=AUSER
com.splwg.batch.submitter.languagecd=ENG
com.splwg.grid.executionMode=CLUSTERED
```

The following table describes the parameters:

Parameter	Comments
com.splwg.batch.submitter.distThreadpool	Name of pool to be used for batch process. If threadpoolworker not used then LOCAL must be specified.
com.splwg.batch.submitter.languagecd	Default Language code used for messages. Relevant language pack must be installed.
com.splwg.batch.submitter.maximumcommitRecords	Default commit interval.
com.splwg.batch.submitter.promptForvalues	Whether interactive mode is to be used. Specify true for Yes (development use only) and false for No. Default is false.
com.splwg.batch.submitter.rerunNumber	Default run number. Default 0.
com.splwg.batch.submitter.threadcount	Default thread limit. Default: 1.
com.splwg.batch.submitter.threadNumber	Default thread number. Default: 0.
com.splwg.batch.submitter.userId	Default userid used for all batch processes.
com.splwg.grid.executionMode	Mode of execution. Valid values: THIN, DISTRIBUTED or CLUSTERED.

This file can be modified for site-specific values. For example, the user Id will need to be changed from "AUSER", so property com.splwg.batch.submitter.userId should be modified to specify the appropriate user id allocated to batch. The user id property could also be removed so that there is no default, forcing every batch process submission to specify its own user id.

6.3.2 submitbatchlog4j.properties Configuration File

The submitjoblog4j.properties configuration file defines the log format and logging level used by the submitjob utility.

The submitjob utility logs information to \$SPLOUTPUT/submitjob.<batch_cd>.<datetime>.log (or %SPLOUTPUT%\submitjob.<batch_cd>.<datetime>.log) where <datetime> is the date and time in YYYYMMDDHHMMSS format of the start of the node and <batch_cd> is the batch code of the batch process.

The product uses the log4j Java classes to centralize all log formats into a standard format. The details of the configuration settings and log4j itself are available at <http://logging.apache.org/log4j/> or <http://en.wikipedia.org/wiki/Log4j>.

Note: This configuration file should not be altered unless instructed by Oracle Support.

6.3.3 Job Specific Parameters Files

Note: Not ALL batch processes require a batch process specific parameter file. It is recommended that ONLY batch processes that require any of the additional parameters listed below should have a batch process specific parameter file.

For individual batch processes it is possible to create a specific file to handle the batch process specific parameters. These parameters can override existing parameters or add additional parameters.

To configure individual batch process specific parameters configuration file named <batchcode>.properties or <batchcode>.properties.xml must exist in the \$SPLBASE/scripts/cm directory (or %SPLBASE%\scripts\cm directory on Windows). In the vast majority of cases the standard text based properties file will be adequate, but if UTF-8 formatted soft parameter values have to be specified (e.g. Cyrillic characters), it is recommended the xml file format be used.

The format of the batch process specific parameter file is similar to the submitbatch.properties file with the following additional parameters:

Parameter	Comments
com.splwg.batch.submitter.batchCd	Batch Code this batch process is associated with.
com.splwg.batch.submitter.distThreadPool	Name of pool to be used for batch process. If threadpoolworker not used then LOCAL must be specified.
com.splwg.batch.submitter.maximumTimeoutMinutes	Specifies the number of minutes the thread(s) can run between database commits. Only COBOL programs, if used, use this value to avoid "snapshot too old" errors on Oracle databases. Java batch classes completely ignore this parameter.
com.splwg.batch.submitter.processDate	Business Date. This may be omitted. Typically, it is specified on the command line. Format: YYYY-MM-DD
com.splwg.batch.submitter.softParameter.<parname>	For any program-specific parameters, use this form of property specification. The <parname> denotes the name of the parameter. For example, to specify a "number of rows to skip" when submitting a validation program: com.splwg.batch.submitter.softParameter.SKIP-ROWS=1000 Multiple soft parameters may be specified.
com.splwg.batch.submitter.traceProgramEnd	Set this to true to see program end messages in the log.
com.splwg.batch.submitter.traceProgramStart	Set this to true to see program start messages in the log.
com.splwg.batch.submitter.traceSQL	Set this to true to see all SQL statements in the log.

Parameter	Comments
com.splwg.batch.submitter.traceStandardOut	Set this to true to see program debug messages in the log.
com.splwg.grid.executionMode	Mode of execution. Valid values: THIN, DISTRIBUTED or CLUSTERED.

A number of samples in \$SPLBASE/etc directory (or %SPLBASE%\etc directory on Windows) named SAMPLE.properties and SAMPLE.properties.xml are provided. These should be copied and edited to provide site specific values.

Note: Environment variables may be substituted in the command line and the properties file. Environment variable references must be surrounded by the \${...} construct. For example \${SPLOUTPUT} refers to the \$SPLOUTPUT (or %SPLOUTPUT% on Windows) directory.

6.3.4 submitjob[.sh] Command-Line Options

Note: The appropriate environment has to be attached before this script can be executed (i.e. splenviror[.sh] -e <environment> has to be run), unless the script is directly invoked from the Windows explorer by double-clicking on it. In that case it will automatically attempt to attach to the environment that owns the bin directory in which it is located and then prompt for options.

The following options can be specified when executing utility submitjob[.sh]:

```
submitjob[.sh] [-B] [-b] [-c] [-d] [-e] [-f] [-g] [-h] [-i] [-J] [-L] [-m] [-n] [-p]
[-P] [-Q] [-R] [-r] [-s] [-t] [-u] [-x] [-x]
```

Where command line options are:

Command Line Option	Description
-B <COBOL program name>	Batch "helper" COBOL program to perform scheduling activity.
-b <batch code>	Batch code of the batch process to submit. When submitting a batch process, a batch code is always required. Either this option or -P may be specified, not both. If this option is specified, submitjob will use the supplied batch code to look for a default properties file for that batch code (e.g. VAL-SA.properties or VAL-SA.properties.xml as discussed above) and use those properties if found.
-c <thread count>	Concurrent number of threads in which to run the process.
-d <date>	Process / business date. Format is YYYY-MM-DD

Command Line Option	Description
<code>-e <DISTRIBUTED THIN CLUSTERED></code>	<p>Execution mode for this submission. If execution mode <code>THIN</code> is selected, the JVM will create a full application context and run the batch process inside the JVM – i.e. it will not be submitted to a thread pool for a worker JVM to pick up and run. This is analogous to running the <code>SPLBATCH[.sh]</code> utility.</p> <p>If <code>DISTRIBUTED</code> or <code>CLUSTERED</code> is selected, the batch process will be submitted to run in the specified distributed thread pool (option <code>-p</code>). It is also possible to have the submitter JVM be a worker JVM and run the batch process (similar to <code>THIN</code> mode, but in parallel threads). See option <code>-L</code>.</p>
<code>-f<record count></code>	Record commit frequency count.
<code>-g<four Y N switches></code>	Positional tracing switches: <ol style="list-style-type: none"> 1. Program entry 2. Program exit 3. SQL statements 4. General program debugging info <p>For example, <code>NNYN</code> will trace all SQL statements. Value of <code>NNNN</code> disables all tracing.</p>
<code>-h</code>	Show help information. Display the available options and their descriptions. The information is not logged.
<code>-i <RMI port number></code>	Port number of RMI Registry to start and/or reference. If specified with <code>-R</code> , this number will be used only to substitute applicable URL <code>{port}</code> references. This option will not add any new RMI/JMX properties - it can only be used to override existing ones. See note below
<code>-J</code>	<p>Do not start JMX connector. This option disables JMX monitoring for this JVM. As far as <code>submitjob</code> is concerned, options <code>-i</code>, <code>-R</code> and <code>-J</code> are only applicable to batch processes submitted in <code>THIN</code> mode, or <code>DISTRIBUTED</code> or <code>CLUSTERED</code> mode to the <code>LOCAL</code> thread pool.</p> <p>For each property prefixed by <code>spl.runtime.management.connector.url</code> that is defined with the default set of properties (e.g. in the <code>submitbatch.properties</code> file), the framework will start a JMX Connector for the specified URL.</p> <p>This activates JMX monitoring inside the worker node so that a client JMX console can be used to monitor and manage active threads. If this option is specified, the framework will not start any JMX connectors.</p>

Command Line Option	Description
-l <ENGIFRAIetc.>	Language code. Relevant language pack must be installed.
-L	<p>Submit this batch to the LOCAL thread pool (i.e. this JVM). Only applicable for DISTRIBUTED or CLUSTERED mode. If specified, any default thread pool property is ignored. This option and -p are mutually exclusive.</p> <p>By specifying option -L, the batch process is submitted to the LOCAL thread pool that every submitter JVM offers by default. This option is only applicable in a DISTRIBUTED or CLUSTERED mode execution (-e). This is similar to submitting the batch process in THIN mode (i.e. a worker JVM is not needed to run the batch process), except thread pool LOCAL can run multiple batch threads concurrently.</p> <p>For example, the following command will run batch process VAL-SA inside this submitter JVM (LOCAL thread pool) in 8 threads concurrently: <code>submitjob[.sh] -b VAL-SA -c 8 -L -e DISTRIBUTED</code>.</p>
-m <number of minutes>	Minutes between database commits to avoid "snapshot too old" errors.
-n <email address>	Send a notification email when a batch process has ended to <email address>. For more information, refer to Sending Emails at the Conclusion of Batch Processes section.
-p <threadpool name>	Distributed thread pool in which to run the batch process. This option and -L are mutually exclusive.
-p	Issue console prompts for the standard batch process parameters. When submitting a batch process, a batch code is always required. Either this option or -b may be specified, not both. If -p is specified, the submitter JVM will prompt for the batch code and other run parameters. If a batch-specific properties file exists for the batch code entered at the prompt, it will NOT be used; the only defaults in effect would be the ones specified in <code>submitbatch.properties</code> .
-Q	Preview the properties that would be in use for the run without actually running the application. Specify other options along with this option to show how they would override or substitute the default properties. The information is not logged.

Command Line Option	Description
-R	<p>Do not start a local RMI registry. As far as submitjob is concerned, options -i, -R and -J are only applicable to batch processes submitted in THIN mode, or DISTRIBUTED or CLUSTERED mode to the LOCAL thread pool. If property spl.runtime.management.rmi.port is defined as a default property (e.g. in the submitbatch.properties file), the batch framework will attempt to start an RMI registry on the given port number.</p> <p>This option can be used to suppress the automatic RMI registry startup. It may be required if an externally started RMI registry is already running. Note that if this option is used, the RMI port number supplied through the -i option is only used for substitution in the JMX Connector URLs.</p>
-r <run number>	Run number of batch process to rerun.
-s <space name>	Space name for "hard partition" of workers. Default is MAIN. Used for development only.
-t <thread number>	Number of individual thread for this submission. Specify 0 to automatically submit all threads.
-u <user id>	Application user id used for batch process
-x <name=value, name=value, ...>	Name=value pairs of INDIVIDUAL soft parameters expected by the batch program. Value portion may be enclosed in quotes. These parameters will be merged with any existing (defaulted) soft parameters. This option and -x are mutually exclusive.
-x <name=value, name=value, ...>	Name=value pairs of ALL soft parameters expected by the batch program. Value portion may be enclosed in quotes. These parameters will replace all existing (defaulted) soft parameters. This option and -x are mutually exclusive.

6.3.5 Property Override Order

When submitjob.[sh] is invoked, it can accept a number of command-line options to alter its default configuration. The default configuration options come from internal system defaults, the submitbatch.properties file or the batch specific properties file as described above.

The properties are overridden in the following order:

1. The submitbatch.properties supersedes the internal system defaults.
2. The batch-specific properties (e.g. VAL-LL.properties) supersede the submitbatch.properties and the internal system defaults.

3. The command-line options supersede the defaults in `submitbatch.properties`, the batch process-specific properties and the internal system defaults.

6.3.6 Port Number of RMI Registry (-i)

As far as `submitjob[.sh]` is concerned, options `-i`, `-R` and `-J` are only applicable to batch processes submitted in THIN mode, or (DISTRIBUTED|CLUSTERED) mode to the LOCAL thread pool.

The `-i` option specifies the port number to:

- Use when the framework starts an RMI Registry and
- Substitute in all JMX Connector URL {port} references.

For example, given the following properties in `threadpoolworker.properties`

```
spl.runtime.management.rmi.port=9999
spl.runtime.management.connector.url.default=service:jmx:rmi://jndi/rmi
://:{host}:{port}/spl/fw/jmx(onnector
```

or and this command-line

```
submitjob[.sh] -i 1099
```

will cause the value for property `spl.runtime.management.rmi.port` AND the "{port}" string in the `spl.runtime.management.connector.url.default` property to be substituted.

Note: That in this case, the special substitution string "(host)" will also be replaced by the name of the host machine. Therefore, assuming the host name is "localhost", the properties will therefore be modified to look as follows:

```
spl.runtime.management.rmi.port=1099
spl.runtime.management.connector.url.default=service:jmx:rmi://jndi/rmi://
localhost:1099/spl/fw/jmx(onnector
```

6.3.7 Soft Parameters (-x) vs (-X)

For batch processes that have multiple soft parameters, this option controls how the soft parameter properties are managed. For example, assume the following soft parameter properties are defined for batch process `XXXX` in its `XXXX.properties` file:

```
com.splwg.batch.submitter.softParameter.FILE-PATH=(:\data
com.splwg.batch.submitter.softParameter.FILE-NAME=default.dat
```

These soft parameters are therefore the defaults for this batch process if it is submitted with no command-line options.

The following command will submit the batch process with a new FILE-NAME, but leave the FILE-PATH as the default:

```
submitjob[.sh] -b XXXX -x FILE-NAME=newfile.dat
```

In other words, only the specified soft parameter (FILE-NAME) has been overridden.

It may be necessary in some cases to replace ALL the soft parameters with the ones specified, particularly where there are many soft parameters and only one or two are required. This command will submit the above batch process with a new FILE-NAME, but remove the FILE-PATH property for this execution:

```
submitjob[.sh] -b XXXX -X FILE-NAME=newfile.dat
```

6.3.8 Environment Variable Substitution at Runtime

At runtime it is possible to substitute local variables by the individual thread parameters at runtime. Three new local variables will be added that will be replaced at the thread level:

- {threadNumber} – will be replaced by the number of the executing thread
- {processDate} – will be replaced by process date
- {processDateTime} – will be replaced by process date time

These variables can be used in the soft parameters. For example, if the process date is 01-31-2009 1:30 PM and the current thread is thread number 1, specifying the parameter FILE-NAME as:

```
-x FILE-NAME=MYOUTPUTFILE-{processDateTime}-{threadNumber}
```

Or

```
com.splwg.batch.submitter.softParameter.FILE-NAME= MYOUTPUTFILE-
{processDateTime}-{threadNumber}
```

would result in the FILE-NAME parameter being resolved to:

```
MYOUTPUTFILE-2009-01-31-13.30.00-1
```

6.3.9 Return Codes

The following return codes apply to the processing using this method:

Return Code	Usage
0 (zero)	Successful
Non-zero	Unsuccessful. See log files for more information.

6.4 bedit - Batch Configuration Editor

Note: To use this facility the BATCHEDIT_ENABLED parameter must be set to true using the configureEnv[.sh] utility and responding true to "Enable Batch Edit Functionality".

The bedit[.sh] utility, known as BatchEdit, provides an easier means of developing and maintaining batch cluster configuration files for CLUSTERED mode implementations.


BatchEdit is a Java program to edit the batch configuration files for threadpoolworker, submitjob and Oracle Coherence. It utilizes templates to determine the variable names and default values for each configuration file and provides a menu of options based upon those templates. Whilst the configuration files are plain text properties or XML files and can be edited using any text editor (such as vi or notepad), BatchEdit helps guide the configuration by confining the properties to an appropriate set for the type of configuration, doing basic validation of the settings and providing template-sensitive help.

6.4.1 Concepts

The `BatchEdit` utility allows the configuration files to be built with simple instructions rather than editing files in the product an editor which can be error prone. The following concepts apply to `BatchEdit` to achieve this:

- The `BatchEdit` utility uses a set of templates for each configuration file that have been pre-optimized for production settings and best practices.
- The `BatchEdit` utility tracks user preferences to reduce editing effort. For example, if your site uses a particular type of configuration, then this is applied whenever appropriate. These preferences can be reset at anytime.
- The `BatchEdit` utility allows manipulation of configuration settings using simple commands including adding new sections without the need for physical editing.
- The `BatchEdit` utility includes comprehensive help to assist in the manipulation of the configuration files and explain each setting.

The preferences (located in `$SPLBASE/splapp/standalone/config`) and templates (located in `$SPLBASE/templates`) are used by the `BatchEdit` utility to generate the necessary configuration files as outlined in the figure below:

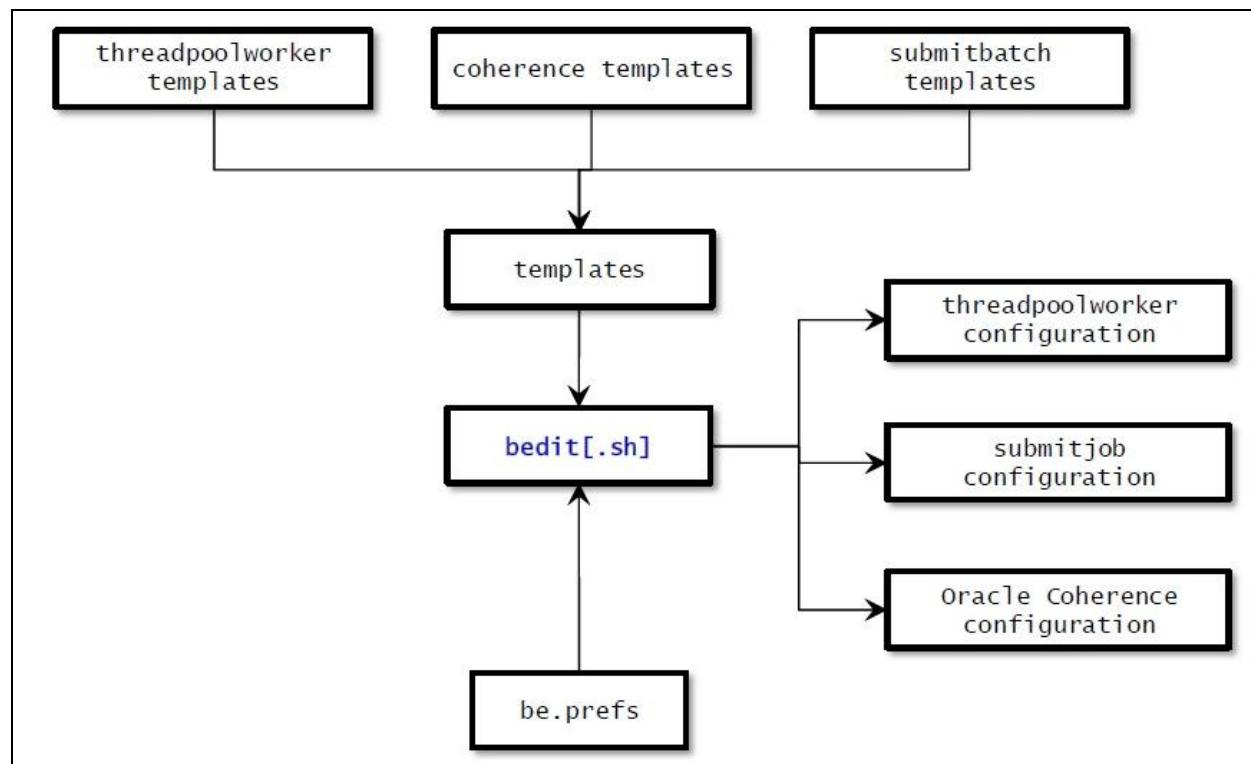

6.4.2 `bedit[.sh]` Command-Line Options

Note: that the appropriate environment has to be attached to before this script can be executed (i.e. `splenviron[.sh] -e <environment>` has to be run), unless the script is directly invoked from the Windows explorer by double-clicking on it. In that case it will automatically attempt to attach to the environment that owns the bin directory in which it is located and then prompt for options.

The following options can be specified when executing utility `bedit[.sh]`:

```
bedit[.sh] [-h] [ [-g] [-t <template>] [-b <batchcode>|-e <mode>|-l
<label>|-c|-s|-w] <file> ] | [-A]
```

where command line options are:

Command Line Option	Description
<code>-h</code>	Show command help. All other options specified are ignored.
<code>--h</code>	Show extended command help. All other options specified are ignored.
<code>-g</code>	Generate the configuration file from template and exit immediately. The configuration file name may be specified explicitly or implicitly as described under Mutually Exclusive Arguments below.
<code>-t <template></code>	<p>The template type to use if multiple templates are available.</p> <p>Examples: <code>wka</code> for Well-Known-Addresses, <code>mc</code> for Multicast, and <code>ss</code> for single server.</p> <p>This is optional. The default is determined from <code>be.prefs</code>, <code>be.properties</code> or <code>be.default.properties</code>, in that order.</p>

Mutually Exclusive Arguments

Command Line Option	Description
<code>-b <batchcode></code>	The batch code-specific properties to configure. This will create/edit a file named <code>job.<batchcode>.properties</code> .
<code>-e <mode></code>	<p>The submitter properties for execution mode <code>THIN</code> or <code>LOCAL</code>.</p> <p><code>THIN</code> - One thread for independent JVM. Used for development only.</p> <p><code>LOCAL</code> - Multi-threaded submission to <code>threadpoolworker</code>.</p> <p>This will create/edit a file named <code>submitbatch.<mode>.properties</code>.</p>
<code>-l <label></code>	The <code>threadpoolworker</code> label-specific properties to configure. This will create/edit a file named <code>threadpoolworker.<label>.properties</code> .
<code>-c</code>	Edit the cluster configuration. Shortcut name for <code>tangosol-coherence-override.xml.properties</code> .
<code>-s</code>	Edit the base (default) submitter configuration. Shortcut name for <code>submitbatch.properties</code> .
<code>-w</code>	Edit the base (default) <code>threadpoolworker</code> configuration. Shortcut name for <code>threadpoolworker.properties</code> .
<code><file></code>	The name of the property <code><file></code> to edit. This must be a valid batch properties or Oracle Coherence XML configuration override file. May be used instead of the shortcut forms above and must be the last argument if specified.

Exclusive Arguments

Command Line Option	Description
-A	<p>Generate ALL the base configuration files and exit. This effectively invokes bedit[.sh] with -g for each of the files denoted by options -c, -s and -t. Option -A must be the only option if specified.</p> <p>Examples:</p> <pre>bedit threadpoolworker.properties bedit -c -t wka bedit -w -l cache</pre>

6.4.3 Cluster (Coherence) Configuration

One of the most important aspects of the batch configuration is the configuration of the cluster. The cluster configuration is essentially configuring Oracle Coherence with details of the nodes in the cluster, the networking to be used within the nodes and tolerances between those nodes for performance and communication.

To use the cluster configuration features of the `BatchEdit` utility use the following variations on the command:

Command	Description
<code>bedit[.sh] -c -t <type></code>	Create to cluster of type <type>. Also, it can be used to switch types.
<code>bedit[.sh] -c</code>	Edit the existing cluster
<code>bedit[.sh] tangosol-coherence-override.xml.properties</code>	Long form of previous option

The cluster type determines the templates and the settings. There are three cluster types available:

Cluster Type	Description	Override Property
mc	Multi-cast based cluster (default)	<code>tangosol-coherence-override.mc.be</code>
wka	Unicast or Well Known Address based cluster	<code>tangosol-coherence-override.wka.be</code>
ss	Single server cluster. Useful for demonstrations, training and other simple one node environments. Cluster is restricted to the local machine only.	<code>tangosol-coherence-override.ss.be</code>

Once the cluster configuration file is created the available properties for that configuration are available and can be changed using the following commands:

Command	Description
set <propertyvalue> <value>	Set the <propertyvalue> to <value>
save	Save and apply the changes
add	Add section (applies to wka to add a new wka host to the cluster)
del	delete section (applies to wka to delete wka host to the cluster)
what	Display the configuration filename that is being changed
help <propertyvalue>	Detailed help for <propertyvalue>
exit	Exit the editor. If changes have been made a prompt will ask the next action: <ul style="list-style-type: none"> • y - Apply changes • n - Reverse out all changes since last save • c - Cancel Exit action

Note: Refer to the [Cluster Properties](#) section for details of properties available.

For example:

```

set cluster SPLADM.DEMO
set address 127.0.0.1
set loglevel 0
$ bedit.sh -c -t ss
Current Settings
cluster (SPLADM.DEMO)
address (127.0.0.1)
port (42020)
loglevel (5)
mode (dev)
$ bedit.sh -c -t wka
Editing      file      /spl/OUAF/splapp/standalone/config/tangosol-coherence-
override.xml using template /spl/OUAF/etc/tangosol-coherence-override. wka.be
Batch Configuration Editor 1.0 [tangosol-coherence-override.xml]
-----
Current Settings
cluster (SPLADM.DEMO) address (127.0.0.1) port (42020)

```

```
loglevel (5) mode (dev) socket.1
wkaaddress (127.0.0.1)
wkaport (42020)
```

6.4.3.1 Guidelines for Cluster Management

The following guidelines apply for use of defining the cluster using this method:

- Use `ss` type clusters for single server environments such as demonstration, training or development.
- For `wka` implementations each node in the cluster must be defined as a socket with the `wkaaddress` and `wkaport` as outlined in Well Known Addresses.
- For `mc` implementations the address must be in the multicast range outlined in Batch Server Configuration Files.

6.4.4 Threadpoolworker Configuration

Once the cluster is defined the next important configuration process is to define the threadpoolworkers to be used in that cluster. Threadpoolworkers are the JVM's that are workers that actually execute the jobs that are submitted to the cluster.

6.4.4.1 ThreadpoolWorker Concepts

When implementing threadpoolworkers there are a number of key concepts to understand and take into account:

- Each environment has one batch cluster.
- Batch clusters can be named (known as role) for monitoring purposes.
- More than one threadpoolworker can exist in a batch cluster.
- More than one threadpoolworker can exist per host.
- Threadpoolworkers have separate memory settings and thread limits to define their capacity in terms of number of simultaneous threads that can be run on that threadpoolworker.
- Threadpoolworkers are named to improve management and clustering.
- Threadpoolworkers that are named the same will form a name cluster within that cluster, even if the threadpoolworkers are on different hosts. For example, if you have two threadpoolworkers named FRED with 5 threads each, then you can run 10 threads simultaneously within FRED.
- Threadpoolworkers can be started on multiple hosts within a batch cluster.
- Threadpoolworkers can be labelled for configuration purposes, this defines their attributes when they are initiated.
- Threadpoolworkers are separated into two types:
 - Cache (or storage enabled) threadpoolworkers - These are threadpoolworkers that do not perform work but are available to consolidate cluster communications or are used for administration purposes.
 - Non-cache (or storage disabled) threadpoolworkers - These are threadpoolworkers that perform work.

- For implementations with a batch cluster with large amounts of threads or large amount of threadpoolworker, should create at least one cache node per host in the batch cluster to reduce network traffic between nodes.

6.4.4.2 ThreadpoolWorker BatchEdit Command Options

To use the threadpool configuration features of the `BatchEdit` utility use the following variations on the command:

Command	Description
<code>bedit[.sh] -l <label></code>	Create/Edit to threadpoolworker configuration of label <code><label></code> . Also, it can be used to switch types. Two labels are supplied by default: <ul style="list-style-type: none"> • job - threadpoolworker optimized to run batch jobs • cache - threadpoolworker optimized to run caches • <other> - Generic threadpoolworker
<code>bedit[.sh] -w</code>	Edit the base threadpool settings
<code>bedit[.sh] threadpoolworker.properties</code>	Edit the <code>threadpoolworker.properties</code> file

Once the threadpool configuration file is created the available properties for that configuration are available and can be changed using the following commands:

Command	Description
<code>set [<poolname>] <propertyvalue> <value></code>	Set the <code><propertyvalue></code> to <code><value></code>
<code>Save</code>	Save and apply the changes
<code>add <poolname></code>	Add section for <code><poolname></code>
<code>del <poolname></code>	Delete section for <code><poolname></code>
<code>what</code>	Display the configuration filename that is being changed
<code>help <propertyvalue></code>	Detailed help for <code><propertyvalue></code>
<code>exit</code>	Exit the editor. If changes have been made a prompt will ask the next action: <ul style="list-style-type: none"> • y - Apply changes • n - Reverse out all changes since last save • c - Cancel Exit action

Note: Refer to the [Threadpool Properties](#) section for details of properties available.

For example:

```
set minheap 1024m
set daemon false
set invocthds 4
$ bedit.sh -w
Batch Configuration Editor 1.0 [threadpoolworker.properties]
```

Current Settings

```
minheap (1024m)
maxheap (1024m)
maxperm (256m)
daemon (true)
rmport (6550)
dkidisabled (false)
storage (true)
distthds (4)
invocthds (4)
role (OUAF_Base_TPW)
pool.1
    poolname (DEFAULT)
    threads (5)
pool.2
    poolname (LOCAL)
    threads (0)
```

```
$ bedit.sh -l cache
```

File

```
/spl/DEMO/splapp/standalone/config/threadpoolworker.cache.properties does not
exist - create? (y/n) y
```

```
Editing file /spl/DEMO/splapp/standalone/config/threadpoolworker.cache.
properties using template /oracle/OUAFDEMO/etc/threadpoolworker.cache.be
```

```
Batch Configuration Editor 1.0 [threadpoolworker.cache.properties]
```

Current Settings

```
poolname (cache)
minheap (768m)
maxheap (768m)
maxperm (256m)
```

```
distthds (4)
invocthds (4)
role (OUAF_Cache_TPW)
```

6.4.5 Submitter Configuration

To execute a job in a threadpoolwork uses the `submitjob.sh` utility to initiate and wait for the job to end. The `submitjob.sh` command can accept options for the job on the command line but also read a configuration file for the parameters.

To use the submitter configuration features of the BatchEdit utility use the following variations on the command:

Command	Description
<code>bedit.sh -s -e <mode> -b <batchcode></code>	Create/Edit to submitter configuration of batch job <code><batchcode></code> using execution mode <code><mode></code> . Also, it can be used to switch types. The following modes are supported: <ul style="list-style-type: none"> • LOCAL - Execute job in threadpoolworker. • THIN - Execute single threaded job in submitter JVM rather than threadpoolworker. Used for development purposes only.
<code>bedit.sh submitbatch.properties</code>	Edit the <code>submitbatch.properties</code> file

Once the submitter configuration file is created the available properties for that configuration are available and can be changed using the following commands:

Command	Description
<code>set <propertyvalue> <value></code>	Set the <code><propertyvalue></code> to <code><value></code>
<code>save</code>	Save and apply the changes
<code>add soft</code>	Add section for <code><parameters></code>
<code>del <soft.x></code>	Delete section for <code><parameters></code>
<code>what</code>	Display the configuration filename that is being changed
<code>help <propertyvalue></code>	Detailed help for <code><propertyvalue></code>
<code>exit</code>	Exit the editor. If changes have been made a prompt will ask the next action: <ul style="list-style-type: none"> • y - Apply changes • n - Reverse out all changes since last save • c - Cancel Exit action

Note: Refer to the [SubmitJob Properties](#) section for details of properties available.

For example:

```
$ bedit.sh -s
Editing file /spl/DEMO/splapp/standalone/config/submitbatch.properties using
template /spl/DEMO/etc/submitbatch.be
```

```
Batch Configuration Editor 1.0 [submitbatch.properties]
-----
```

```
Current Settings
```

```
poolname (DEFAULT)
threads (1)
commit (200)
user (AUSER)
lang (ENG)
storage (false)
role ({batchCode})
```

```
$ bedit.sh -b BILLING
File /spl/DEMO/splapp/standalone/config/job.BILLING.properties does not exist
- create? (y/n) y
Editing file /spl/DEMO/splapp/standalone/config/job.BILLING.properties using
template /spl/DEMO/etc/job.be
```

```
Batch Configuration Editor 1.0 [job.BILLING.properties]
-----
```

```
Current Settings
```

```
poolname (DEFAULT)
threads (1)
commit (10)
user (SYSUSER)
lang (ENG)
soft.1
  parm (maxErrors)
  value (500)
```

```
> set soft.1 value 0
Batch Configuration Editor 1.0 [job.BILLING.properties]
-----
```

```
Current Settings
```

```
poolname (DEFAULT)
threads (1)
commit (10)
user (SYSUSER)
lang (ENG)
soft.1
  parm (maxErrors)
  value (0)
```

7. Miscellaneous Operations

There are a number of common operations that are applicable to the background processing component of the product.

7.1 Forcing a Process to Not Attempt Restart

In some cases it is necessary to force a background process to be complete within the product. This tells the product not to attempt to restart the process but start afresh. For example, a process may error and it may take a while to fix the error, instead of potentially holding up other processes you can tell the system to assume it has completed so that the next execution can start from the beginning and in fact reprocess the records.

To force the process to not to attempt a restart following the instructions to access the batch status information and select the Run Control tab and select the Do not Attempt Restart field. Remember to save the change using the Save button. A sample of this screen is illustrated below:



7.2 Error Processing

When a background process detects an error, the error may or may not be related to a specific object that is being processed. For example, if the program finds an error during batch parameter validation, this error is not object-specific. However, if the program finds an error while processing a specific bill, this error is object-specific. The system reports errors in one of the following ways:

- Errors that are not object-specific are written to the error message log in the Batch Run Tree.
- Some batch processes create entries in an exception table for certain object-specific errors. For example, an error detected in the creation of a bill may be written to the bill exception table. If an error is written to an exception table, it does not appear in the batch run tree. For each exception table, there is an associated To Do Entry Process that creates a To Do Entry for each error to allow a user to correct the problem on-line.
- For some background processes, errors that do not result in the creation of an exception record may instead generate a To Do entry directly. For these processes, if you wish the system to directly create a To Do entry, you must configure the To Do type appropriately. Refer to To Do entry for object-specific errors for information about configuring the To Do type. If the background process detects an object specific error AND you have configured the system to create a To Do entry, the error is not written to the batch run tree. If you have configured your To Do type to not create To Do entries for certain errors, these errors are written to the batch run tree. Each process that may be configured in this way is indicated in the following sections in the

Error May Generate To Do column. Note that not all tables below include this column. If the table does not include the column, then the creation of a To Do for an object-specific error is not applicable for the types of processes documented in the table.

Some processes create exceptions and To Do entries. It is possible for a background process to create entries in an exception table AND create To Do entries directly, depending on the error. Consider batch billing; any conditions that cause a bill or bill segment to be created in error status result in a record added to the bill exception table or the bill segment exception table. However, any object-specific error that is not related to a specific bill or bill segment or any error that prevents a bill or bill segment from being created may result in a To Do entry for the object-specific error.

7.3 Marking a Process Complete from the Command Line

One of the situations that may occur in the product is that an executing process may prematurely stop before completion. This situation occurs if:

- The process was manually stopped using the UNIX/Windows kill command at the OS level. Operators may choose to kill a process if it appears to be having a detrimental effect on the system.
- The application server that is running the process has a hardware fault that causes the process to stop prematurely.
- The database server that is running has a software or hardware fault that severs the connection to the database prematurely.

In all the above situations the status within the product does not reflect the current status of the process as the background process was prevented from updating its batch control records in time.

In most cases a simple rerun of the process with the same parameters may be performed, after the situation that caused the fault has been remedied, to start the process from its last consistency point. If there is a desire to ensure that the batch control information reflects the status after a failure then the UPDERR process should be executed prior to any restart.

7.4 Sending Emails at the Conclusion of Batch Processes

It is possible to send a notification email when a batch process has ended. This notification happens after the batch process has ended and all application-related commits/rollbacks have taken place. It does not impact the batch process itself in the event of errors happening during the notification process. The default email is a simple text email that contains the batch control, date and time of the submission, run number, submission parameters, batch process summary indicating records processed and in-error, as well as the thread details, including logged messages (up to 100).

The email address can be configured a number of ways:

- **Online Submission:** The email address can be specified on the batch submission screen.
- **External Submission:** The email address is specified on the `-n` option of the `submitjob[.sh]` command.

The email address can be an individual person or a valid mail group (the latter requires additional configuration in your email system).

To use email notification the email server must be configured using one of the following options:

1. The mail server can be defined through the default XAI Sender (see XAI Options in the XAI documentation) with the appropriate SMTP settings on the Context tab.
2. Alternatively the properties can be supplied in the form of JVM properties as follows:

```
# Host whose mail services will be used
# (Default value : localhost)
mail.host=<your mail server>
# Return address to appear on emails
# (Default value : username@host)
mail.from=<name@host>
# Other possible items include:
# mail.user=
# mail.store.protocol=
# mail.transport.protocol=
# mail.smtp.host=
# mail.smtp.user=
# mail.debug=
```

Name	Type	Description
mail.debug	boolean	The initial debug mode. Default is false.
mail.from	String	The return email address of the current user, used by the <code>InternetAddress</code> method <code>getLocalAddress</code> .
mail.host	String	The default host name of the mail server for both Stores and Transports. Used if the <code>mail.protocol.host</code> property isn't set.
mail.mime.address.strict	boolean	The <code>MimeMessage</code> class uses the <code>InternetAddress</code> method <code>parseHeader</code> to parse headers in messages. This property controls the strict flag passed to the <code>parseHeader</code> method. The default is true.
mail.smtp.class	String	Specifies the fully qualified class name of the provider for the specified protocol. Used in cases where more than one provider for a given protocol exists; this property can be used to specify which provider to use by default. The provider must still be listed in a configuration file.
mail.smtp.host	String	The host name of the mail server for the specified protocol. Overrides the <code>mail.host</code> property.
mail.smtp.port	int	The port number of the mail server for the specified protocol. If not specified the protocol's default port number is used.

Name	Type	Description
mail.smtp.user	String	The user name to use when connecting to mail servers using the specified protocol. Overrides the mail.user property.
mail.store.protocol	String	Specifies the default message access protocol. The Session method <code>getStore()</code> returns a Store object that implements this protocol. By default the first Store provider in the configuration files is returned.
mail.transport.protocol		Specifies the default message access protocol. The Session method <code>getTransport()</code> returns a Transport object that implements this protocol. By default the first Transport provider in the configuration files is returned.
mail.user	String	The default user name to use when connecting to the mail server. Used if the <code>mail.protocol.user</code> property isn't set.

These properties can be added to the `threadpoolworker.properties` file for the standalone batch `threadpoolworker`, or the `spl.properties` file for an online application server that hosts a batch worker.

7.5 Template Overrides

By default, some of the configuration files outlined in this document are generated from product templates. The scripts provided with the product for use during installation, patching and configuration regularly rebuild the configuration files from templates. This can cause any manual changes to configuration files to be reset to the base templates, which may mean loss of customizations if backups of the configuration files are not taken.

The Oracle Utilities Application Framework now features a facility where a site may substitute their own templates, based upon the product templates. This allows sites to customize their copies of the custom templates to suit their site standards and retain their settings across upgrades and patches.

The process to use this facility is as follows:

- Make a copy of the template used for the relevant configuration file and prefix the copy with `cm..`. Use the table below to identify the template used for the relevant configuration file (templates are stored in the `etc` directory of the product environment):

Configuration File	Template	Custom Template Name
<code>spl.properties</code>	<code>spl.properties.standalone.template</code>	<code>cm.spl.properties.standalone.template</code>
<code>hibernate.properties</code>	<code>hibernate.properties.template</code>	<code>cm.hibernate.properties.template</code>
<code>log4j.properties</code>	<code>log4j.properties.standalone.template</code>	<code>cm.log4j.properties.standalone.template</code>

Configuration File	Template	Custom Template Name
e0batch.properties	e0batch.properties.template	cm.e0batch.properties.template
submitjob.sh	submitjob.sh.template	cm.submitjob.sh.setvars.include
submitjob.cmd	submitjob.cmd.template	cm.submitjob.cmd.setvars.include
threadpoolworker.cmd	threadpoolworker.cmd.setvars.include	cm.threadpoolworker.cmd.setvars.include
threadpoolworker.sh	threadpoolworker.sh.setvars.include	cm.threadpoolworker.sh.setvars.include

- Make the site specific changes necessary for your site. Remember to use the structure and the environment variables in the template as a guide for the format.
- Save the template.

Once this is done, if the configuration files are ever generated manually or as part of a patch then they will use the custom template instead of the base template.

Note: If this facility is used, then it is the site's responsibility to maintain the custom template in line with the product template. If future fixes add additional facilities to base templates then those changes must be manually applied to any custom templates. Check any custom templates against the base templates on a regular basis

7.5.1 Batch Configuration User Exits

Whilst the product supports custom templates it is now possible to only supply fragments of a customization rather than whole configuration templates, known as user exit include files. This allows you to specify additional settings to be included in the templates provided in stream when the product templates are used to generate the configuration files when using the `initialSetup` command.

When `initialSetup` is executed the templates are applied with the following order of preference:


- Base framework templates (no prefix). These templates should not be altered.
- If a product specific template exists (prefixed by the product code) then the product template is used instead of the base Framework template for the configuration file. These templates should not be altered.
- If a template is prefixed with "em_" then this is a custom template to be used instead of the product specific and base framework template.

These templates should live in `$SPLBASE/templates` (or `%SPLBASE%\templates` on Windows).


Note: When creating custom templates please use the base framework and any related product templates as the basis for the content of the custom template.

Whilst this facility is flexible it means that any updates to the base or product templates MUST be reflected in any custom templates. A new option is to use user exits that are placed strategically in the most common configuration files that need change. When `initialSetup` is executed the existence of user exit files are checked (when an `#ouaf_user_exit` directive exists in the template) and the

contents included in the generated configuration file. The figure illustrates the process for a typical configuration change:

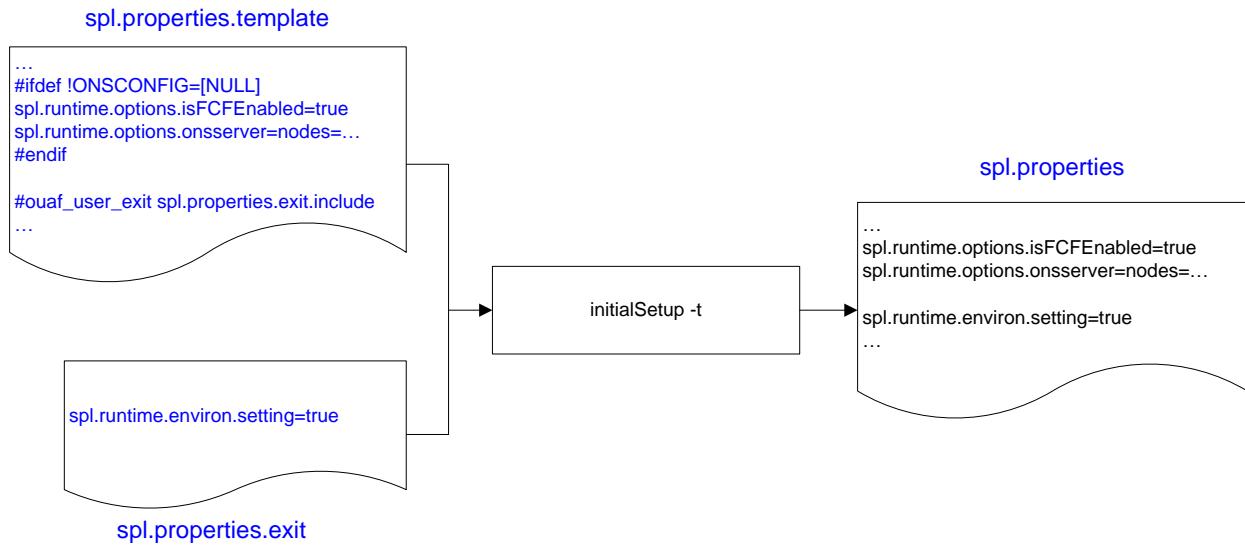

As with the custom templates user exits have preferences depending on the ownership of the user exit include file. Custom includes will override any product specific includes. There are no base includes as they are already included in the template files. The figure below illustrates the preferences for both templates and includes:

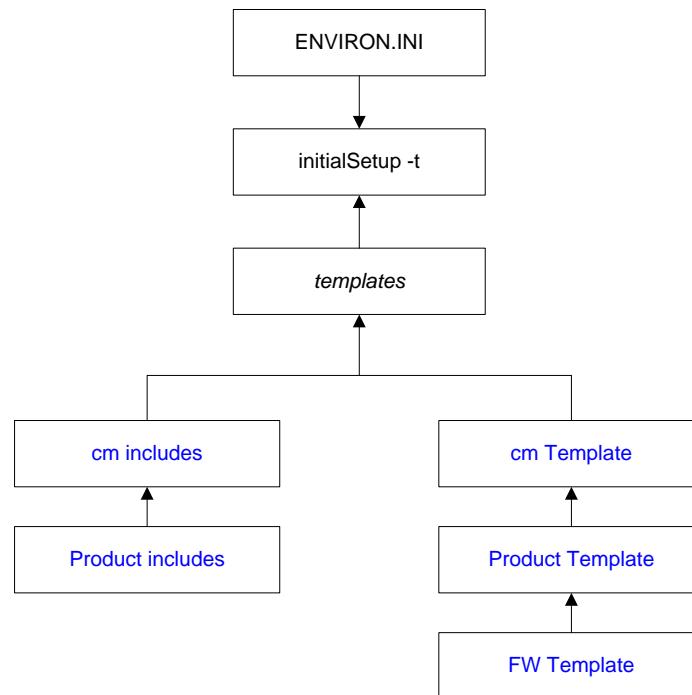

The table below outlines the currently available user exits in the available templates:

Template File	User Exit Include File	Position and Usage
eOBatch.properties.template	eOBatch.properties.exit.include	Sets locations of files and other locations for batch for eOBatch.properties file.
hibernate.properties.batch.template	hibernate.properties.exit.include	At end of file (common hibernate.properties entries)
	hibernate.properties.batch.exit.include	At end of file (Batch specific hibernate.properties entries)
log4j.properties.standalone.template	log4j.properties.exit.include	At end of file (common log4j.properties entries)
	log4j.properties.standalone.exit.include	At end of file (common log4j.properties entries)
ouaf.jmx.access.file.template	ouaf.jmx.access.file.exit.include	Allows for additional users to be specified for JMX connections.
ouaf.jmx.password.file.template	ouaf.jmx.password.file.exit.include	Allows for additional passwords to be specified for JMX users.
splcobjrun.cmd.template	splcobjrun.cmd.exit.include	Allows for COBOL execution parameters (COBOL supported products only) – Windows.
splcobjrun.sh.template	splcobjrun.sh.exit.include	Allows for COBOL execution parameters (COBOL supported products only) – Linux/UNIX.
spl.properties.service.template	spl.properties.exit.include	At end of file (common spl.properties entries)
	spl.properties.service.exit.include	At end of file for EJB spl.properties entries.
	spl.properties.service.timeouts.exit.include	User exit for service timeouts.
spl.properties.template	spl.properties.exit.include	At end of file (common spl.properties entries)
	spl.properties.root.exit.include	At end of file for Web Application based spl.properties entries.
	spl.properties.timeouts.root.exit.include	User exit for global timeouts
spl.properties.standalone.template	spl.properties.exit.include	At end of file (common spl.properties entries)

Template File	User Exit Include File	Position and Usage
	spl.properties.standalone.exit.include	At end of file for Batch Application based <code>spl.properties</code> entries.
	spl.properties.timeouts.standalone.exit.include	Future use
submitbatch.properties.template	submitbatch.properties.exit.include	User exit for <code>submitbatch.properties</code> .
submitjob.sh.template	submitjob.sh.setvars.include	User exit for worker submitter at start of <code>submitjob</code> utility
	submitjob.sh.exit_1.include	User exit for setting variables prior to execution within <code>submitjob</code> utility
submitjob.cmd.template	submitjob.cmd.setvars.include	User exit for worker submitter at start of <code>submitjob</code> utility (Windows).
	submitjob.cmd.exit_1.include	User exit for setting variables prior to execution within <code>submitjob</code> utility (Windows).
submitbatchlog4j.properties.template	submitbatchlog4j.properties.exit.include	User exit for <code>submitbatchlog4j.properties</code> file
threadpoolworker.properties.template	threadpoolworker.properties.exit.include	User exit for <code>threadpoolworker.properties</code> file.
threadpoolworker.sh.template	threadpoolworker.sh.exit_1.include	User exit to set custom <code>threadpoolworker</code> utility settings.
	threadpoolworker.sh.setvars.include	User exit to set variables at start of <code>threadpoolworker</code> utility.
threadpoolworker.cmd.template	threadpoolworker.cmd.exit_1.include	User exit to set custom <code>threadpoolworker</code> utility settings (Windows).
	threadpoolworker.cmd.setvars.include	User exit to set variables at start of <code>threadpoolworker</code> utility (Windows).

To use these user exits create the user exit include file with the prefix "cm_" in the

`$SPLBASE/templates` (or `%SPLBASE%\templates`) directory. To reflect the user exits in the configuration files you must execute the `initialSetup` utility. Refer to the Custom JMS Configuration section for an example of this process.

7.5.2 Properties File User Exits

The product behavior is controlled at a technical level by the values in the properties files. Whilst most of the settings are defaulted to their correct settings in the file, additional parameters may be added to the properties files to add new behavior. User exits are used to set these additional parameters in the properties files.

From the table above there are more than one user exit available in each properties file template to use. This is designed to maximize the reusability of configuration settings. There are a number of specialized user exits that may need to be used:

- **Common Settings**³ – The configuration files used by each channel of execution (online, Web Services and batch) has a common user exit. This user exit is used to house all the setting you want to implement regardless of the channel used. For example the common setting user exits are:

Configuration File	User Exits for Common Settings
<code>hibernate.properties</code>	<code>hibernate.properties.exit.include</code>
<code>log4j.properties</code>	<code>log4j.properties.exit.include</code>
<code>spl.properties</code>	<code>spl.properties.exit.include</code>

- **Batch specific Settings** – To implement custom settings for batch there is a separate user exit to hold those parameters for those channels. The specific user exits are:

Configuration File	User Exits for Common Settings
<code>hibernate.properties</code>	<code>hibernate.properties.batch.exit.include</code>
<code>log4j.properties</code>	<code>log4j.properties.standalone.exit.include</code>
<code>spl.properties</code>	<code>spl.properties.standalone.exit.include</code>

7.5.3 Specifying Custom Log File Names

By default the `submitjob` and `threadpoolworker` utilities will create logs in a specific location. For example:

User Exit	Platform	Default Location and Name
<code>submitjob.sh</code>	Linux/UNIX	<code>\$SPLOUTPUT/submitjob.{batchcode}.{sysDateTi me}.log</code>
<code>submitjob.cmd</code>	Windows	<code>%SPLOUTPUT%\submitjob.{batchcode}.{sysDateT ime}.log</code>

³ These settings are shared across all channels. Batch specific settings should be set in the Batch Specific user exits.

User Exit	Platform	Default Location and Name
threadpoolworker.cmd	Windows	%SPOLOUTPUT%\threadpoolworker.{sysDateTime}.log
threadpoolworker.sh	Linux/UNIX	\$SPOLOUTPUT\threadpoolworker.{sysDateTime}.{pid}.log

Where,

- {batchcode} : Batch Control used for job
- {sysDateTime} : System Date and Time in YYYYMMDDHHmmSSSS format
- {pid} : Process Id

If your implementation wishes to implement custom log file names then this may be achieved using user exits which allow custom setting of the file name pattern. In the utilities an environment variable is set to the name and location of the log file. The user exit may be used to set this environment variable to an alternative. The user exit contains the script code fragment used to set the log file environment file name.

The table below lists the user exit, environment variable name and the platform:

User Exit	Platform	User Exit Name	Environment Variable
submitjob.sh	Linux/UNIX	submitjob.sh.setvars.include	SBJLOGID
submitjob.cmd	Windows	submitjob.cmd.setvars.include	SBJLOGID
threadpoolworker.cmd	Windows	threadpoolworker.cmd.setvars.include	TPWLOGID
threadpoolworker.sh	Linux/UNIX	threadpoolworker.sh.setvars.include	TPWLOGID

Additionally internal session variables are available for use in the user exits:

Variable	submitjob ⁴	threadpoolworker	Comments
RUNOPTS		-	
batchcode	-		
sysDateTime	-		

Note:

Other environment variables in the session can be used and determined in the user exit script code.

When setting the log file name the location and file name MUST be valid for the security and operating system used for the product. The directory should be writable by the OS user used to execute the job.

⁴ These are set for the Java runtime.

7.6 Turning off L2 Cache

Note: This facility should only be used where background processes specifically require it. Turning off the cache in other circumstances will adversely affect performance.

By default, the threadpools use a batch cache to load common configuration data to avoid excessive calls to the database. In some cases it is desirable to disable the caching for a particular threadpool. To disable the cache on startup of the threadpool use the following command:

```
threadpoolworker[.shJ -12 OFF -p <threadpoolname>
```

where <threadpoolname> is the name of the threadpool to start with the caching disabled.

Once the threadpool is started then all jobs that require caching off can be executed in this threadpool using the DrST-THD-POOL parameter (for online submission), com.splwg.batch.submitter.distThreadPool parameter in the job specific properties file or -p option on the submitjob command.

8. Batch Configuration Edit Parameters

The Batch Edit utility allows configurations to build and maintain a batch configuration for your site using a command line utility as opposed to manually manipulating configurations.

This section outlines the various settings available. It is recommended to use the help facility within Batch Edit for more detailed information.

Note:

The Batch Edit functionality is disabled by default. Attempting to use this facility without enabling it will result in the error message "ERROR: BatchEdit is not enabled - use configureEnv to enable". To enable the facility use the `configureEnv[.sh]` -a utility and set the "Enable Batch Functionality" to true in Advanced Environment Miscellaneous Configuration section. The `initialSetup[.sh]` utility does not need to be executed to apply this setting.

Customers migrating to this facility should backup their current batch configuration.

8.1 Cluster Properties

The Batch Edit facility allows for configuration of the batch cluster using the `-c` option.

For example:

```
bedit[.sh] [-t [ss|mc|wka]] -c
```

or

```
bedit[.sh] tangasol-coherence-override.xml
```

The table below lists the available configuration properties and their scope. For more detailed information it is recommended to use the `help <propertyvalue>` command where `<propertyvalue>` corresponds to the parameter to get more information upon.

To set the values of these parameter use the `set <propertyvalue> <value>` command where `<propertyvalue>` corresponds to the parameter to set.

Note: Remember to use the `save` command to commit the changes.

Property	Scope	Usage
address	all	Unicast/Multi-cast IPv4 address reserved for the cluster. Typically corresponds to the <code>COHERENCE_CLUSTER_ADDRESS</code> in the <code>ENVIRON.INI</code> . In single server and wka mode this is set to <code>127.0.0.1</code> .
cluster	all	Cluster name. Typically corresponds to the <code>COHERENCE_CLUSTER_NAME</code> in the <code>ENVIRON.INI</code> . Cluster names are typically associated with environment names.
loglevel	all	Level of logging required for debug purposes. Refer to the <code>help loglevel</code> command for details of the supported levels.
mode	all	Cluster mode to use for the cluster. Typically corresponds to the <code>COHERENCE_CLUSTER_MODE</code> in the <code>ENVIRON.INI</code> .

Property	Scope	Usage
port	all	Port number used by members to listen to. Typically corresponds to the COHERENCE_CLUSTER_PORT in the ENVIRON.INI. Port must be unique across machines. In a single server cluster, the port must be unique to the host.
socket	wka	Socket or host in the cluster. This defines settings for each node in the cluster using well known addresses. A socket must exist for each machine in the cluster. Refer to the help socket command for more information.
wkaaddress	wka	The IP address for the individual node in the cluster. Refer to the help wka command for more information.
wkaport	wka	The Port number for the individual node in the cluster. This can be same or different across the cluster. Refer to the help wka command for more information.

Legend: all - applies to all modes, mc - applies to multi-cast implementations only, wka - applies to unicast implementations only or ss - applies to single server implementations only.

8.2 Threadpool Properties

The Batch Edit facility allows for configuration of the batch threadpools using the -l option.

For example:

bedit[.sh] -l <label>

or

bedit[.sh] -w

or

bedit[.sh] threadpoolworker.properties

The table below lists the available configuration properties. For more detailed information it is recommended to use the help <propertyvalue> command where <propertyvalue> corresponds to the parameter to get more information upon.

To set the values of these parameter use the set <propertyvalue> <value> command where <propertyvalue> corresponds to the parameter to set.

Note: Remember to use the save command to commit the changes.

Property	Usage
daemon	Whether the online submission daemon is enabled or not. Valid values are true or false. Used for environments where online submission is used only.
disthds	Defines the maximum number of threads used internally by the Oracle Coherence cache services. Refer to the help disthds command for more information.
dkdisabled	Used to control deferred key inserts in particular products. Refer to the product documentation and the help dkdisabled command for more information.

Property	Usage
invocthds	Defines the maximum number of threads used internally by the Oracle Coherence invocation services. Refer to the <code>help invocthds</code> command for more information.
maxheap	Maximum heap size for JVM within each threadpool. Valid values correspond to the <code>java Xmx</code> option.
maxperm	Maximum heap size for JVM within each threadpool. Valid values correspond to the <code>java XXMaxPermSize</code> option (if supported by the JVM vendor).
minheap	Minimum heap size for JVM within each threadpool. Valid values correspond to the <code>java Xms</code> option.
pool	Section for each threadpool defined within the cluster. A section exists for each individual threadpool.
poolname	Name of threadpool. Names such as <code>default</code> and <code>cache</code> are reserved.
rmiport	Port used for JMX configuration for batch monitoring across threadpools.
role	Informational name assigned to the threadpools for adding clarity in monitoring.
storage	Enables or disables local partition storage on the cluster. This setting is set in conjunction with the use or non-use of cache servers. Refer to the <code>help storage</code> command for more information.
threads	Maximum number of concurrent batch threads supported per instance of the threadpool named by <code>poolname</code> .

8.3 SubmitJob Properties

The Batch Edit facility allows for configuration of the batch submitter using the `-b` option.

For example:

```
bedit[.sh] -b <batchcode>
```

or

```
bedit[.sh] -s
```

or

```
bedit[.sh] submitbatch.properties
```

The table below lists the available configuration properties. For more detailed information it is recommended to use the `help <propertyvalue>` command where `<propertyvalue>` corresponds to the parameter to get more information upon.

To set the values of these parameter use the `set <propertyvalue> <value>` command where `<propertyvalue>` corresponds to the parameter to set.

Note: Remember to use the <code>save</code> command to commit the changes.

Property	Usage
commit	The commit interval (in objects) for this batch job.

Property	Usage
lang	The default language code used for this batch job
parm	Individual soft parameter name for this job. Valid values are available from the batch control record for this batch job.
poolname	The poolname to be used for this batch job (or the default)
role	Default role for the submitter JVM. This is used for monitoring purposes. This defaults to the batch job code {batchcode}.
soft	Soft parameters section. One section per individual parameter.
storage	Enables or disables local partition storage for this job. This setting is set in conjunction with the use or non-use of cache servers. Refer to the <code>help storage</code> command for more information.
threads	Maximum Number of threads for this batch job
user	The product user to use for authorization purposes for this batch job
value	Value of the soft parameter designated by <code>parm</code> .