

Oracle® Transportation Management
Branding Guide
Release 6.4.3
Part No. E92113-01

December 2017

ORACLE®

Copyright Notice

Oracle® Transportation Management Branding Guide, Release 6.4.3

Part No. E92113-01

Copyright © 2001, 2017, Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

Contents

COPYRIGHT NOTICE.....	III
CONTENTS.....	IV
FIGURES	V
TABLES.....	VI
SEND US YOUR COMMENTS	IX
PREFACE	XI
CHANGE HISTORY	XI
1. BRANDING OVERVIEW	1-1
 ORACLE TRANSPORTATION MANAGEMENT WEB PAGE TECHNOLOGY	1-1
BRANDABLE VS. NON-BRANDABLE APPLICATION FEATURES	1-1
2. BRANDING TECHNOLOGY	2-1
EXTENSIBLE MARKUP LANGUAGE (XML)	2-1
EXTENSIBLE STYLESHEET LANGUAGE (XSL)	2-1
CASCADING STYLE SHEETS (CSS)	2-1
3. REQUIREMENTS.....	3-1
RECOMMENDED BRANDING SKILL SET	3-1
REQUIRED DOCUMENTS.....	3-1
MOBILE APP	3-1
4. THEMES	4-1
ORACLE THEMES	4-1
CREATING A NEW LOCAL THEME.....	4-1
CREATING A NEW GLOBAL THEME.....	4-3
EDITING FILES FOR A THEME.....	4-4
XSL FILE SEARCHING	4-4
BRANDING AN XSL FILE.....	4-4
BRANDING A CSS FILE.....	4-5
BRANDING AN IMAGE	4-6
CREATING THEMES FOR A LOCALE.....	4-7
DOUBLE-BYTE CHARACTER SETS	4-7
APPLY BRANDING BASED ON LOCALE	4-7
TRANSLATIONS	4-8
CSS DESCRIPTIONS	4-8
HTML TAG STYLES	4-8
GENERIC CLASSES	4-9
BODY CLASSES	4-9

HEADER CLASSES	4-10
BODY DATA CLASSES	4-10
HEADER FIELDS	4-11
BODY FOOTER	4-11
SECTION DEFINITIONS.....	4-11
SECTION LABEL CLASSES.....	4-12
GRID CLASSES	4-13
FIELD DATA CLASSES.....	4-15
AUTO COMPLETE CLASSES	4-16
TEXT	4-16
MESSAGE BOX.....	4-17
MISCELLANEOUS.....	4-18
VARIOUS ICONS	4-19
POWER DATA CLASSES	4-21
TAB CLASSES	4-21
UNIFIED GLOBAL HEADER CLASSES.....	4-21
ASK ORACLE CLASSES.....	4-22
CALENDAR CLASSES	4-24
VOLUME CLASSES	4-25
LOGIN CLASSES	4-25
SCROLL GRID CLASSES.....	4-26
TREE CONTROL CLASSES	4-29
SIMPLE TREE CONTROL CLASSES.....	4-31
SIMPLE TREE 2 CONTROL CLASSES	4-32
MAIN MENU CLASSES.....	4-33
BUTTON CLASSES	4-33
CONTEXT MENU CLASSES	4-34
IWINDOW CLASSES	4-34
DOCK SCHEDULING / DECISION CONTROL CENTER / ADVANCED LAYOUT MANAGER.....	4-35
POPUP	4-52
DIALOG.....	4-53
PANEL WINDOW	4-54
HOW TO FIND OUT WHICH CSS STYLE IS USED	4-56
UNIFIED GLOBAL HEADER IMAGE AND URL	4-58

5. BRANDING OTHER PARTS OF ORACLE TRANSPORTATION MANAGEMENT

5-1

EMAILS.....	5-1
MAPS	5-1

6. USER INTERFACES.....

6-1

THEME MANAGEMENT	6-1
UPLOAD MAIL AND USER-DEFINED IMAGES	6-1

7. BRANDING FUSION TRANSPORTATION INTELLIGENCE.....

7-1

8. APPENDIX A: ADDITIONAL RESOURCES

8-1

XML RESOURCES	8-1
XSL RESOURCES	8-1
CSS RESOURCES	8-1

Figures

Figure 4-1: Example Theme XSL Structure	4-3
---	-----

Figure 4-2: Logon Page	4-57
Figure 4-3: Developer Tools	4-57
Figure 4-4: Unified Global Header	4-58

Tables

Table 4-1: HTML Tag Styles.....	4-8
Table 4-2: Generic Classes	4-9
Table 4-3: Body Classes	4-9
Table 4-4: Header Classes	4-10
Table 4-5: Body Data Classes	4-10
Table 4-6: Header Fields	4-11
Table 4-7: Body Footer	4-11
Table 4-8: Second Definitions	4-11
Table 4-9: Section Label Classes	4-12
Table 4-10: Grid Classes.....	4-13
Table 4-11: Field Data Classes.....	4-15
Table 4-12: Auto Complete Classes	4-16
Table 4-13: Text	4-16
Table 4-14: Message Box	4-17
Table 4-15: Miscellaneous	4-18
Table 4-16: Various Icons	4-19
Table 4-17: Power Data Classes.....	4-21
Table 4-18: Tab Classes.....	4-21
Table 4-19: Unified Global Header Classes	4-21
Table 4-20: Ask Oracle Classes	4-22
Table 4-21: Calendar Classes	4-24
Table 4-22: Volume Classes	4-25
Table 4-23: Login Classes	4-25
Table 4-24: Scroll Grid Classes	4-26

Table 4-25: Finder Results Grid Images/Icons	4-29
Table 4-26: Tree Control Classes	4-29
Table 4-27: Simple Tree Control Classes.....	4-31
Table 4-28: Main Menu Classes.....	4-33
Table 4-29: Button Classes	4-33
Table 4-30: Context Menu Classes	4-34
Table 4-31: IWindow classes	4-34
Table 4-32: Multiple Class Selectors	4-35
Table 4-33	4-36
Table 4-34: Panel Stretch Layout	4-36
Table 4-35: Panel Group Layout.....	4-36
Table 4-36: Panel Form Layout	4-37
Table 4-37: Button Group	4-37
Table 4-38: Command Button.....	4-37
Table 4-39: Table	4-38
Table 4-40: Menu	4-40
Table 4-41: Command Menu	4-41
Table 4-42: Show Detail Header	4-41
Table 4-43: Navigation Pane	4-42
Table 4-44: Message	4-43
Table 4-45: Panel Header.....	4-43
Table 4-46: Panel Collection	4-44
Table 4-47: Toolbox	4-45
Table 4-48: Menu Bar.....	4-45
Table 4-49: Toolbar.....	4-46
Table 4-50: Command Toolbar Button	4-46
Table 4-51: Panel Splitter	4-47
Table 4-52: Miscellaneous.....	4-48

Table 4-53: Panel Tabbed	4-48
Table 4-54: Tree.....	4-49
Table 4-55: Map	4-50
Table 4-56: Select Controls	4-51
Table 4-57: Popup	4-52
Table 4-58: Dialog	4-53
Table 4-59: Panel Window.....	4-55

Send Us Your Comments

Oracle® Transportation Management Branding Guide, Release 6.4.3

Part No. E92113-01

Oracle welcomes your comments and suggestions on the quality and usefulness of this publication. Your input is an important part of the information used for revision.

- Did you find any errors?
- Is the information clearly presented?
- Do you need more information? If so, where?
- Are the examples correct? Do you need more examples?
- What features did you like most about this manual?

If you find any errors or have any other suggestions for improvement, please indicate the title and part number of the documentation and the chapter, section, and page number (if available). You can send comments to us in the following ways:

- Electronic mail: otm-doc_us@oracle.com

If you have problems with the software, contact Support at <https://support.oracle.com> or find the Support phone number for your region at <http://www.oracle.com/support/contact.html>.

Preface

The *Oracle Transportation Management Branding Guide* provides information about the process of branding the Oracle Transportation Management Web interface. The term "branding" refers to the practice of using your own images and configuring Web interface themes to more closely reflect a company's brand.

This document is intended to provide detailed information about the process of branding the Oracle Transportation Management Web interface. It is intended specifically to assist Web developers at client sites. However, this guide may also prove useful for internal (Oracle) audiences who wish to gain a greater understanding of the Oracle Transportation Management branding process.

Change History

Date	Document Revision	Summary of Changes
12/2017	-01	<p>Updates for 6.4.3.</p> <p>Added new branding variables.</p> <p>Added note about maps for Advanced Layouts.</p> <p>Renamed reference to WEB_CUSTOM property set to CUSTOM</p> <p>Where appropriate, replaced the words "custom", "customizing", "customized" with one of the following "configuration", "configure", "edit", "update", "user-defined", or "customer-defined per Fusion requirements.</p>

1. Branding Overview

As it relates to Oracle Transportation Management, the term “branding” refers to the process of changing the look and feel of the application to reflect the client’s brand. Oracle Transportation Management is shipped with configurable images and web interface themes, which gives you the ability to easily change colors and logos viewed on Oracle Transportation Management Web pages. For example, clients can use their own logos to replace the default Oracle and Oracle Transportation Management logos throughout the application.

Branding helps you to develop a strong awareness for your trade name, product, or services. The ability to brand Oracle Transportation Management is also beneficial for those businesses that plan to distribute the Oracle Transportation Management product.

Oracle Transportation Management Web Page Technology

Oracle Transportation Management Web interface themes are separate from the structure and function of Oracle Transportation Management and independent of the business logic of the Oracle Transportation Management user interface. Extensible markup language (XML) defines the structure of Oracle Transportation Management. Java describes the behavior of the Oracle Transportation Management application. CSS combined with extensible style sheet language (XSL) and JavaServer Pages (JSP) defines the coherent look and feel of Oracle Transportation Management.

By changing the CSS/XSL files, pointing to a different set of CSS/XSL files, or by configuring a manager layout screen, you can change the look of Oracle Transportation Management without affecting the underlying structure or functionality.

Brandable vs. Non-brandable Application Features

Specifically, you have the ability to change button images, logos, color schemes, font sizes, and colors viewed throughout the Oracle Transportation Management web application. To a lesser extent, you may also change the layout of some Oracle Transportation Management pages, although this aspect of branding is handled through the Menu Manager feature within Oracle Transportation Management.

Branding **does not** include the ability to add, rename, or delete fields in Oracle Transportation Management. Nor does it include the ability to move, rename, or rearrange sections of Oracle Transportation Management pages. These features are available to Manager Layout pages written using the JSP technology.

2. Branding Technology

Oracle Transportation Management web pages are constructed using XML to provide structure, and XSL and CSS files to define the look.

Extensible Markup Language (XML)

XML is an open standard for describing data, as defined by the World Wide Web Consortium (W3C). XML is used for defining data elements on a web page and business-to-business documents. It uses a similar tag structure as HTML; however, where HTML defines how elements are displayed, XML defines what those elements contain.

HTML uses predefined tags, but XML allows page developers to define the tags. Therefore, virtually any data items (for example, product and amount due) can be identified, allowing Web pages to function much like database records.

Extensible Stylesheet Language (XSL)

XSL is a style sheet format for XML documents. XSL is the XML counterpart to the CSS language in HTML, although XML supports CSS1 and CSS2. XSL Transformations (XSLT) are extensions to XSL for converting XML documents into XML or other document types and may be used independently of XSL.

Unlike HTML, element names in XML have no intrinsic presentation semantics. Without a style sheet, a processor could not know how to render the content of an XML document, other than as an undifferentiated string of characters. XSL provides a comprehensive model and a vocabulary for writing such style sheets using XML syntax.

Cascading Style Sheets (CSS)

CSS is the style sheet format that provides layout settings that can be applied to Web pages. Any structured document format can use CSS; XML is just one example of where CSS can be applied.

CSS is the style sheet format supported for XML; Oracle Transportation Management uses this style sheet format.

3. Requirements

In addition to the required software and documents listed in this chapter, you should have an Oracle Transportation Management test environment available in order to test your changes.

You must have access to the following items prior to beginning the Oracle Transportation Management branding process:

- Adobe PhotoShop, Version 7.0 (or above)
- A text editor (HomeSite is recommended)
- It is recommended that you have a file compare utility.

Note: The steps in this guide only apply to on-premise OTM/GTM installations.

Recommended Branding Skill Set

It is recommended that the branding developer have thorough knowledge of DHTML/HTML/CSS and Javascript, as well as experience with XML/XSL.

The branding developer should have experience/understanding of graphical user interfaces, as well as experience developing graphical content.

An understanding of the following applications is recommended:

- Browsers
- WebLogic
- Oracle RDBMS
- Apache
- Tomcat

Required Documents

The required documents are available on the server where Oracle Transportation Management is installed under <otm_install_dir>/web/htdocs/ (for CSS, javascript and image files) and <otm_install_dir>/glog/gc3webapp.ear/GC3.war/WEB-INF/xsl (for XSL files).

The following documents are needed in order to create a theme:

- /xsl/themes/themes.xsl: This document calls the theme to be presented. By importing a specified theme, the user is presented with a new look and feel.
- /xsl/themes/themesalta.xsl: This document contains links to all of the CSS (Cascading Style Sheets) used throughout the theme. It also contains references to every image used throughout the Web interface.
- /css/themes/themesalta.css: This document defines the theme's color and font usage. For certain elements it also defines positioning, spacing, padding, margins, alignment, background image, and border definitions.
- /images/themes/themesalta: This directory contains all of the images used throughout the theme (themesalta contains images for the Oracle Transportation Management Theme, and so on).

Mobile App

Branding instructions for the Mobile App have been moved to the Mobile App Guide on [OTN](#).

4. Themes

An Oracle Transportation Management “theme” is a specific color scheme for the application. This section explains how you create and configure themes, along with the XSL and CSS **for each theme shipped with Oracle Transportation Management**. Depending on your needs, you can brand across all accounts, limit to certain roles, domains, or users.

Note: The theme does not affect the following Oracle Transportation Management and Global Trade Management user interfaces:

- All pages under Sourcing > Rate Maintenance
- Workbench Designer and Workbench layouts
- Shipment Visibility
- Landed Cost Simulator

Note: The steps in this guide only apply to on-premise OTM/GTM installations.

The required documents are available on the server where Oracle Transportation Management is installed under `<otm_install_dir>/web/htdocs/` (for CSS, javascript and image files) and `<otm_install_dir>/glog/gc3webapp.ear/GC3.war/WEB-INF/xsl` (for XSL files).

Note: During the development process to enable the XSL interpreter to load changed XSL files without stopping and restarting the server where Oracle Transportation Management is installed, set the property `glog.webserver.xsl.debug=true` in your `glog.properties` file or the CUSTOM property set.

Oracle Themes

OTM ships with one supported theme: themesalta.

There are two types of themes: global and local. A global theme is applied across all domains and there can be only one global theme at a time. A local theme is applied to a specific domain. The new themesalta is a global theme because it is applied across all domains.

This section covers how to create a global theme and local theme. First, you create a new local theme and then you apply the new local theme to all domains so that it becomes a global theme.

Creating a New Local Theme

Step 1: Naming the Theme

Create a unique theme name. This theme name will be referenced in future steps as `<theme name>`. This name will be used in crossing directories; be careful if you use special characters. Directory hierarchies are supported when the characters ‘/’ or ‘\’ are used.

Step 2: Creating the Theme Directories

Starting with 6.3, all branded files are located in a directory defined by the property `<glog.customPath property>`. The directories for the branded files are:

- `<otm_install_dir>/web/htdocs/css/<glog.customPath property>/themes/<theme name>`
- `<otm_install_dir>/web/htdocs/js/<glog.customPath property>/themes/<theme name>`

- <otm_install_dir>/web/htdocs/images/<glog.customPath property>/themes/<theme name>
- <otm_install_dir>/glog/gc3webapp.ear/GC3.war/WEB-INF/xsl/<glog.customPath property>/<theme name>/themes

If they will not be used, you can skip the creation of any of these directories.

Step 3: Copying themes.xsl

1. Copy the xsl/themes/themes.xsl file to
<otm_install_dir>/glog/gc3webapp.ear/GC3.war/WEB-INF/xsl/<glog.customPath property>/<theme name>/themes
2. Edit the xsl:import tag in the newly copied themes.xsl file to point to your new theme as follows:

```
<xsl:import href="file:<theme name>/themes/<theme file name>.xsl"/>
```

Note: <theme name> can be different from <theme file name>. This example uses the same names for the purpose of simplicity.

Step 4: Creating the Theme XSL File

1. Create the <theme file name>.xsl file in
<otm_install_dir>/glog/gc3webapp.ear/GC3.war/WEB-INF/xsl/<glog.customPath property>/<theme name>/themes
 2. Copy the following into the new file to get you started:
- ```
<?xml version="1.0" encoding="utf-8"?>
<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
xmlns:resolver="http://www.jclark.com/xt/java/glog.webserver.util.GLURIResolver"
xmlns:xt="http://www.jclark.com/xt" exclude-result-prefixes="xt"
version="1.0">
 <xsl:import href="file:themes/themesalta.xsl"/>
 <xsl:output method="html"/>
</xsl:stylesheet>
```

This will import all of the variables defined in the shipped themesalta.xsl. It is recommended to import the themes/themesalta.xsl file and only add in the variables that you want to change (See Branding an Image). This will ensure that any installation changes that are made (e.g., moving images, renaming images, image definition changes, etc) will be captured.

You **must** have following directories after following the steps above:

1. <otm\_install\_dir>/glog/gc3webapp.ear/GC3.war/WEB-INF/xsl/<glog.customPath property setting>/<theme name>/themes/themes.xsl
2. <otm\_install\_dir>/glog/gc3webapp.ear/GC3.war/WEB-INF/xsl/<glog.customPath property setting>/<theme name>/themes/<theme file name>.xsl

**Note:** There must be a sub-folder named "themes" as shown in the above path.



**Figure 4-1: Example Theme XSL Structure**

### Step 5: Setting a User to Use the New Theme

Within user preferences (Configuration and Administration > Preferences > User Preferences), there is a preference called Stylesheet Location. This value is used to resolve file lookup.

The Stylesheet Location must be the same as the <theme name>.

### ***Creating a New Global Theme***

Now, you can apply to the newly created local theme to all domains so that it becomes a global theme.

#### **Applying a Local Theme to all Domains**

1. Copy the xsl/themes/themes.xsl file to  
`<otm_install_dir>/glog/gc3webapp.ear/GC3.war/WEB-INF/xsl/<glog.customPath property>/themes`
2. Edit the xsl:import tag in the newly copied themes.xsl to point to your new <theme name> like below:  
`<xsl:import href="file:<theme name>/themes/<theme file name>.xsl"/>`

**Note:** <theme name> can be different from <theme file name>.

You **must** have following directories after completing the above steps:

1. `<otm_install_dir>/glog/gc3webapp.ear/GC3.war/WEB-INF/xsl/<glog.customPath property setting>/<theme name>/themes/themes.xsl`
2. `<otm_install_dir>/glog/gc3webapp.ear/GC3.war/WEB-INF/xsl/<glog.customPath property setting>/<theme name>/themes/<theme file name>.xsl`

**Note:** There must be a sub-folder named "themes" as shown in the above path.

## **Editing Files for a Theme**

### **XSL File Searching**

If you have a Stylesheet Location defined, you should search for the xsl file starting in <otm install dir>/glog/gc3webapp.ear/GC3.war/WEB-INF/xsl/<glog.customPath property>/<Stylesheet Location Value>. Otherwise, you can start the search in <otm install dir>/glog/gc3webapp.ear/GC3.war/WEB-INF/xsl/<glog.customPath property>/themes/themes.xsl. If the file is not found then move upwards in the directory structure until the XSL file is found. The default Oracle Transportation Management version is located in <otm install dir>/glog/gc3webapp.ear/GC3.war/WEB-INF/xsl/.

Example:

```
<glog.customPath property> = custom
<theme name> = redtheme
<file name> = themes/themes.xsl
```

The search for this file is in this order.

1. <otm\_install\_dir>/glog/gc3webapp.ear/GC3.war/WEB-INF/xsl/custom/redtheme/themes/themes.xsl
2. <otm\_install\_dir>/glog/gc3webapp.ear/GC3.war/WEB-INF/xsl/custom/themes/themes.xsl
3. <otm\_install\_dir>/glog/gc3webapp.ear/GC3.war/WEB-INF/xsl/themes/themes.xsl

### **Branding an XSL File**

The recommended way to brand an XSL file is to start with a simple XSL file that imports the shipped version of that file. This ensures that any changes are made to the file fixes in sections that are not branded will be captured.

Example:

1. Edit the itinerary/CapacityOverride.xsl file.
2. Create the following file in <otm install dir>/glog/gc3webapp.ear/GC3.war/WEB-INF/xsl/<glog.customPath property>/itinerary and call it CapacityOverride.xsl.

```
<?xml version="1.0" encoding="utf-8"?>
<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
version="1.0">

<xsl:import href="file:../../itinerary/CapacityOverride.xsl"/>
<xsl:output method="html"/>
</xsl:stylesheet>
```

This will import the shipped version of the CapacityOverride.xsl file.

3. Then, override any templates in the CapacityOverride.xsl file for configuration.
4. If you want to include a user-created JavaScript file this can be accomplished by adding the following:

```
<script language="javascript" type="text/javascript"
src="${glogUrlPrefix}/js/ clientDirectory}/{new javascript
filename}>" />
```

The placement of this line will depend on the XSL file that is being updated.

## **Branding a CSS File**

Editing a CSS files requires overriding the CSS template in your new theme xsl file.

There are two ways of editing the css file:

1. Continue to use the `themesalta.css` in the CSS template and add a link to your customer-created CSS file. This will allow the retention of all shipped styles so that only the styles that need modification will be in your CSS file.

```
<xsl:template name="css">
 <link rel="stylesheet" type="text/css">
 <xsl:attribute name="href">
 <xsl:value-of
 select="$glogUrlPrefix"/>/css/themes<xsl:value-of
 select="translator:get-translated-
 value('css.root_dir')"/>themesalta.css
 </xsl:attribute>
 </link>
 <link rel="stylesheet" type="text/css">

 <xsl:attribute name="href">
 <xsl:value-of select="$glogUrlPrefix"/>/css/xsl:value-of
 select="$clientDirectory"/><xsl:value-of
 select="translator:get-translated-
 value('css.root_dir')"/>themesmycompany.css
 </xsl:attribute>
 </link>
</xsl:template>
```

2. Import the `themesalta.css` in your CSS:

```
@import url("/css/themes/themesalta.css");
<changes and additions go here>
```

- The css template change would look like:

```
<xsl:template name="css">
 <link rel="stylesheet" type="text/css">
 <xsl:attribute name="href">
 <xsl:value-of select="$glogUrlPrefix"/>/css/xsl:value-of
 select="$clientDirectory"/><xsl:value-of
 select="translator:get-translated-
 value('css.root_dir')"/>themesmycompany.css
 </xsl:attribute>
 </link>
</xsl:template>
```

You will need to add new xsl variables to reference your CSS file. This is so that the JSP-based screens pick up your new CSS file:

If you chose 1:

```
<xsl:variable name="css_name">themesalta.css</xsl:variable>
<xsl:variable name="css_name1">themesmycompany.css</xsl:variable>
```

If you chose 2:

```
<xsl:variable name="css_name">themesmycompany.css</xsl:variable>
```

## ***Branding an Image***

You can find an image name and location the following ways:

- In Internet Explorer, right-click on the image and choose Properties. In the resulting dialog box, the image location is in the Address field.
- In Firefox, right-click on the image and choose Properties. In the resulting dialog box, the image location is in the Location field.

The majority of the images are defined in XSL variables in the `themesalta.xsl` file. Once you know which image you want to modify, use your browser to determine the image file name. From there, search the `xsl/themes/themesalta.xsl` file for the variable declaration. Copy this definition after the `<xsl:output>` element in the `<theme file name>.xsl` file you created. From there modify it to point to the new image file.

### **Scenario**

You want to replace the volume button with a user-created image called `NewVolume.gif`.

1. Place the `NewVolume.gif` image in the branded image directory under `/images/<glog.customPath property>/<theme name>/themes`.
2. Searching for the volume image in the `xsl/themes/themesalta.xsl` file results in finding the `volume_img` variable definition. Copy this definition to your `<theme file name>.xsl` file.
3. We provide a XSL variable called `clientDirectory`. This variable will contain the `<glog.customPath property>/<theme name>/themes` portion of the directory structure.
4. Modify the `volume_img` variable to use point to the new image.
5. The theme file should now look like:

```
<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
 xmlns:resolver="http://www.jclark.com/xt/java/glog.webserver.util.GLURIResolver"
 xmlns:xt="http://www.jclark.com/xt" exclude-result-prefixes="xt"
 version="1.0">
 <xsl:import href="file:themes/themesalta.xsl"/>
 <xsl:output method="html"/>
 <xsl:variable name="themeName">redtheme</xsl:variable>
 <xsl:variable name="clientDirectory">
 <xsl:value-of select="resolver:get-image-client-directory($themeName)"/>
 </xsl:variable>
 <xsl:variable name="volume_img"><xsl:value-of
 select="$glogUrlPrefix"/>/images/<xsl:value-of
 select="$clientDirectory"/>/NewVolume.gif</xsl:variable>
</xsl:stylesheet>
```

When a user is set to use this theme they will see all of the default images defined by the `themesalta` theme except for the volume image. The volume image will be the new branded image.

Continue on doing this for all necessary images.

If you cannot find the image in this manner then it is defined in the `.css` file. The easiest way to find these images is to go into the `images` directory using Windows Explorer, change the view type to `Thumbnails`, and search for the image. If you are not using Windows, then the easiest way is to determine which `.css` class is being used and look for it within the `.css` file.

The image location is relative to the css location.

## Scenario

You want to change the background image of the global area. This is the style:

```
.globalArea.header { background-image:
url(../../images/themes/themesalta/headerBg.jpg); }
```

You would place the following in your CSS file:

```
.globalArea.header { background-image: url(../../images/<glog.customPath
property>/<theme name>/<new image filename>); }
```

## Creating Themes for a Locale

Oracle Transportation Management allows for branding of certain attributes based on locale (language and country). CSS files can be created for each locale, adjusting for font styles and sizes, as well as color preferences. For example, you might want to brand by locale to add more space for double-byte languages like Chinese.

### Double-byte Character Sets

Because double-byte character sets (ideographs like in Chinese) consists of much more details than normal ASCII characters, you need to adapt your stylesheets. Oracle Transportation Management ships with a supported theme adapted for pictograph languages (`themesalta.css`). They are located in: `/css/themes/pict`.

### Apply Branding Based On Locale

To implement internationalized branding:

1. Log in to Oracle Transportation Management as DBA.ADMIN.
2. Go to the label manager and search for the Label ID "css.root\_dir". Learn more about the label manager in the online help.
3. Edit the `css.root_dir` record you found.
4. Add a **language**, **country**, and **domain** as required for what you want to brand. For example, if you want to create a server wide CSS stylesheet for Chinese, add Chinese as language, China as Country, and \* as domain name. The country code is optional, since many countries have a national language.

**Note:** If your language is not listed, contact Oracle Support for help.

5. As **text** enter /DIR/ where DIR will be the directory in which you will place the localized CSS files. A good naming convention would be to use the LANGUAGE\_COUNTRY of the file you are editing. Examples: fr\_CA is French Canadian, zh is Chinese.
6. Click Save.
7. Click Finished.
8. In `<otm_install_dir>/web/htdocs/css/{custom directory}/{client ID or client ID/subdirectory}/themes/`, create a directory with the same name you entered in `css.root.dir`.
9. Copy your default themes directory, including all CSS file to `<otm_install_dir>/web/htdocs/css/{custom directory}/{client ID or client ID/subdirectory}/themes/<DIR>/`.

10. Edit the file to create the new, branded look.
11. Test your locale specific theme by logging into Oracle Transportation Management and setting your user preferences to the country and language you have branded for. See the online help for more information on how to do this. Your new look and feel should be visible after pressing the reload button in your browser.

## ***Translations***

You may wish to change some translations in the Oracle Transportation Management system. For example, you can update "OTM" to "My Company Name".

If you only want to make a few changes, you can use the Label Manager in Oracle Transportation Management (**Configuration and Administration > User Configuration > Label Manager**).

**Note:** This feature is only available to users who are logged in as administrators.

If you need to change large amounts of phrases in Oracle Transportation Management, consider using CSV files to upload your changes to the TRANSLATION\_D table in the database.

## **CSS Descriptions**

The following are descriptions of the classes defined in the themesalta.css file.

### ***HTML Tag Styles***

These are styles applied directly to the definition of an HTML element.

**Table 4-1: HTML Tag Styles**

| <b>Class Name / Tag Name</b> | <b>Description</b>                                                                                                                                                               | <b>Notes</b>                                              |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|
| body                         | This contains the default values of the <body> tag.                                                                                                                              |                                                           |
| a                            | This contains the default values of the <a> tag.                                                                                                                                 | Modified in 6.4.2                                         |
| input                        | This contains the default values of the <input> tag. The [type=radio] and [type=submit] classes are Firefox-specific and are for radio buttons and submit buttons, respectively. | Modified in 6.3<br>Modified in 6.4.2                      |
| num                          | Used specifically for <input> tags. Defined on number fields.                                                                                                                    |                                                           |
| select                       | Default for <select> tag.                                                                                                                                                        | Modified in 6.0<br>Modified in 6.3.4<br>Modified in 6.4.2 |
| textarea                     | Default for <textarea> tag.                                                                                                                                                      | Modified in 6.4.3                                         |
| option                       | Default for <option> tag.                                                                                                                                                        | Modified in 6.4.2                                         |
| form                         | Default for <form> tag.                                                                                                                                                          |                                                           |

| <b>Class Name / Tag Name</b> | <b>Description</b>   | <b>Notes</b>   |
|------------------------------|----------------------|----------------|
| hr                           | Default for <hr> tag | New in 5.5 CU3 |

## Generic Classes

These are generic classes that are often used in conjunction with other classes.

**Table 4-2: Generic Classes**

| <b>Class Name / Tag Name</b> | <b>Description</b>                                               | <b>Notes</b>   |
|------------------------------|------------------------------------------------------------------|----------------|
| .bold                        | Generic class used for bold text.                                |                |
| .required                    | Generic class used for required text.                            |                |
| .w100                        | Generic class used to define an element to have a width of 100%. |                |
| .wa                          | Generic class used to define an element to have a width of auto. |                |
| .error                       | Generic class used for error text                                |                |
| .success                     | Generic class used for success text                              | New in 5.5 CU4 |
| .nw                          | Generic class used to define an element to remove text wrapping. |                |
| .cl                          | Generic class used to remove any float definitions.              |                |
| .it                          | Generic class used for italic text.                              | New in 5.5 CU3 |
| .curDefault                  | Generic class for the default cursor (used mainly on trees)      | New in 5.5 CU4 |

## Body Classes

These are classes used on the <body> tag.

**Table 4-3: Body Classes**

| <b>Class Name / Tag Name</b> | <b>Description</b>          | <b>Notes</b>                                              |
|------------------------------|-----------------------------|-----------------------------------------------------------|
| .body1                       | Used on almost all screens. | Modified in 6.3<br>Modified in 6.3.4<br>Modified in 6.4.3 |

| <b>Class Name / Tag Name</b> | <b>Description</b>                                                                                                                                                                    | <b>Notes</b>    |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| .body2                       | Used on screens without a header section.                                                                                                                                             | Modified in 6.3 |
| .sbody                       | Stands for Standard body. This is used on the finder buttons and result header screens. The original intention was for it to be used when the spacing of body1 and body2 did not fit. |                 |

## **Header Classes**

These classes are used in the header section of the OTM manager and action pages.

**Table 4-4: Header Classes**

| <b>Class Name / Tag Name</b> | <b>Description</b>               | <b>Notes</b>      |
|------------------------------|----------------------------------|-------------------|
| .bodyHeaderCont              | Container of the header section. | Modified in 6.3.4 |
| .hdTitle                     | Header text.                     | Modified in 6.4.2 |
| .hdLine                      | The line under the header title. | Modified in 6.4.2 |

## **Body Data Classes**

These classes are used in the data section OTM manager and action pages.

**Table 4-5: Body Data Classes**

| <b>Class Name / Tag Name</b> | <b>Description</b>                                                                                                                                                                                                  | <b>Notes</b>                                              |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|
| bodyTabDataCont              | Container of the data section of tabular pages. Tabular pages are used for new and edit pages (including single tab pages and second page data even though they may not/do not have any tabs associated with them). | Modified in 6.1<br>Modified in 6.3<br>Modified in 6.4.2   |
| bodyDataCont                 | Container of the data section of non-tabular pages. These include view pages, action/ask Oracle input pages and action/ask Oracle result pages.                                                                     | Modified in 6.3<br>Modified in 6.3.4<br>Modified in 6.4.2 |
| bodyData                     | Subcontainer for the data section.                                                                                                                                                                                  | Added in 6.3.4<br>Modified in 6.3.5<br>Modified in 6.4.2  |

## **Header Fields**

These classes are used in the line right under the tabs on edit/new pages.

**Table 4-6: Header Fields**

| <b>Class Name / Tag Name</b> | <b>Description</b>                                  | <b>Notes</b>                                              |
|------------------------------|-----------------------------------------------------|-----------------------------------------------------------|
| headerFieldsCont             | Container of the header fields section for tabs     | Modified in 6.3<br>Modified in 6.4.2                      |
| subHeaderFieldsCont          | Container of the header fields section for sub tabs | Modified in 6.3<br>Modified in 6.3.4<br>Modified in 6.4.2 |
| headerField                  | Header field (contains a label and data)            |                                                           |
| hfLabel                      | Header field label                                  |                                                           |
| hfData                       | Header field data value                             |                                                           |

## **Body Footer**

The footer section of the page

**Table 4-7: Body Footer**

| <b>Class Name / Tag Name</b> | <b>Description</b>              | <b>Notes</b>                         |
|------------------------------|---------------------------------|--------------------------------------|
| bodyDataFooterCont           | Container of the footer section | Modified in 6.3<br>Modified in 6.3.4 |

## **Section Definitions**

The data inside the body data section is split into individual sections.

**Table 4-8: Second Definitions**

| <b>Class Name / Tag Name</b> | <b>Description</b>              | <b>Notes</b>      |
|------------------------------|---------------------------------|-------------------|
| .bodySubTabSectCont          | Container for a sub tab section | Modified in 6.3.4 |

| <b>Class Name / Tag Name</b>       | <b>Description</b>                                                                                     | <b>Notes</b>                                                |
|------------------------------------|--------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|
| .bodySubDataCont                   | Container for the data within a sub tab section                                                        | Modified in 5.5 CU3<br>Modified in 6.1<br>Modified in 6.4.2 |
| .bodySectsCont                     | Container for sections that appear side-by-side                                                        |                                                             |
| .bodySectsInCont                   | Inner container for sections that appear side-by-side                                                  |                                                             |
| .bodySectHorizSpacer               | Used to space out sections that appear side-by-side                                                    |                                                             |
| .bodySectFFCont                    | Free-form section container. Current uses include the confirmation page, error page, and results page. | Modified in 6.3<br>Modified in 6.4.2                        |
| .bodySectCont                      | Section container                                                                                      | Modified in 6.4.2                                           |
| .bodySectBG                        | Defines the background color of a section (when used).                                                 | Modified in 6.4.2                                           |
| .bodySectInCont<br>.bodyInputAlign | Aligns buttons with an input HTML tag within a section.                                                | Modified in 6.3.4                                           |
| .bodySectInCont                    | The inner container of a body section. This is used for field sections.                                |                                                             |
| .noTbSp                            | No table spacing. Used on table elements where you do not want table spacing defined.                  | Modified in 6.4.2                                           |

## **Section Label Classes**

The labels for a data section

**Table 4-9: Section Label Classes**

| <b>Class Name / Tag Name</b> | <b>Description</b>                     | <b>Notes</b>                                                |
|------------------------------|----------------------------------------|-------------------------------------------------------------|
| .sectLabel                   | Section label                          | Changed in 5.5 CU3<br>Modified in 6.0.<br>Modified in 6.4.2 |
| .sectLabel input             | Input elements within a section label. |                                                             |
|                              |                                        |                                                             |

## Grid Classes

Inline and second page grids

**Table 4-10: Grid Classes**

| <b>Class Name / Tag Name</b>               | <b>Description</b>                                          | <b>Notes</b>                                                |
|--------------------------------------------|-------------------------------------------------------------|-------------------------------------------------------------|
| .grid                                      | Grid container                                              | Modified in 6.0.                                            |
| .gridColGroupRow                           | Grid column group row                                       | Modified in 5.5 CU3                                         |
| .gridColGroupRow<br>.gridColGroupLabelCell | Grid column group row label cell                            |                                                             |
| .gridColGroupRow<br>.gridColGroupLabel     | Grid column group row label                                 |                                                             |
| .gridColGroupRow<br>.gridColGroupDataCell  | Grid column group row data cell                             |                                                             |
| .gridColGroupRow<br>.gridColGroupData      | Grid column group row data                                  |                                                             |
| .grid .gridHeadCell                        | Grid header column                                          | Modified in 6.4.2                                           |
| .grid .gridHeadBtnsCell                    | Grid header column for buttons (used with .gridHeadCell)    |                                                             |
| .grid .gridHeadImgCell                     | Grid header column for images (used with .gridHeadCell)     |                                                             |
| .grid .gridHeadCheckCell                   | Grid header column for checkboxes (used with .gridHeadCell) |                                                             |
| .grid .gridHeadLabel                       | Grid header column for labels (used with .gridHeadCell)     | Modified in 5.5 CU3<br>Modified in 6.3<br>Modified in 6.4.2 |
| .grid .gridHeadRequired                    | Used on the * (required) symbol on a grid header column     |                                                             |
| .grid .rowHead                             | Grid body header row                                        | New in 5.5 CU3                                              |
| .grid .rowOdd                              | Grid body row (odd)                                         | Modified in 6.4.2                                           |
| .grid .rowEvent                            | Grid body row (even)                                        |                                                             |
| .rowSelected                               | Selected grid body row                                      |                                                             |

| <b>Class Name / Tag Name</b> | <b>Description</b>                                                    | <b>Notes</b>       |
|------------------------------|-----------------------------------------------------------------------|--------------------|
| .rowHighlighted              | Highlighted grid body row                                             |                    |
| .rowTotal                    | Grid total row                                                        |                    |
| .gridBodyCell                | Grid body cell (all subsequent body columns are used with this class) | Modified in 6.4.2  |
| .gridBodyCell pre            | Grid body preformatted text cell                                      | New in 5.5 CU3     |
| .gridBodyDetCell             | Grid body detail cell. Used for row detail sections.                  | New in 5.5 CU4     |
| .gridBodyDurCell             | Grid body duration cell                                               | Changed in 5.5 CU3 |
| .gridBodyNumCell             | Grid body number cell                                                 |                    |
| .gridBodyUomCell             | Grid body unit of measure cell (excluding duration)                   |                    |
| .gridBodyDateCell            | Grid body date cell                                                   |                    |
| .gridBodyImgCell             | Grid body image cell                                                  |                    |
| .gridBodyRadioCell           | Grid body radio button cell                                           | Changed in 5.5 CU3 |
| .gridBodyCheckCell           | Grid body checkbox cell                                               |                    |
| .gridBodyBtnsCell            | Grid body buttons cell                                                |                    |
| .gridBodyLabelCell           | Grid body label cell                                                  |                    |
| .gridBodyErrorCell           | Grid body error cell                                                  |                    |
| .gridBodyEmptyCell           | Grid body empty cell                                                  |                    |
| .gridBodyFocusCell           | Grid body focus cell                                                  |                    |
| .gridBodyBlackedCell         | Grid body blackened cell                                              |                    |
| .gridBodyFixedCell           | Grid body fixed cell                                                  |                    |
| .gridBodyEditedCell          | Grid body edited cell                                                 |                    |
| .gridBodyDisabledCell        | Grid body disabled cell                                               |                    |
| .gridBodyInfeasibleCell      | Grid body infeasible cell                                             |                    |
| .gridBodyCurrentCell         | Grid body current cell                                                |                    |

| <b>Class Name / Tag Name</b> | <b>Description</b>                                          | <b>Notes</b>                             |
|------------------------------|-------------------------------------------------------------|------------------------------------------|
| .gridFooterCont              | Container for the grid footer                               | Modified in 5.5 CU3<br>Modified in 6.4.2 |
| .gridButtonsCont             | Container for buttons within a grid                         | Modified in 6.3                          |
| .gridBodyMediumAlertCell     | Grid body medium alert cell. Exclusive to the Yard Manager. | New in 5.5 CU4                           |
| .gridBodyHighAlertCell       | Grid body high alert cell. Exclusive to the Yard Manager.   | New in 5.5 CU4                           |

## **Field Data Classes**

These classes are used in fields including Pick List, Volume, Weight, Dropdowns, etc.

**Table 4-11: Field Data Classes**

| <b>Class Name / Tag Name</b> | <b>Description</b>                              | <b>Notes</b>                             |
|------------------------------|-------------------------------------------------|------------------------------------------|
| .utilization                 | The utilization field                           | Modified in 5.5 CU3<br>Modified in 6.3.4 |
| .utilizationFill             | The filled-in portion of the utilization field. | Modified in 5.5 CU3<br>Modified in 6.3.4 |
| .fieldsCont                  | Multiple field container                        | New in 5.5 CU3                           |
| .fieldCont                   | Data field container.                           |                                          |
| .fieldLabel                  | Label for a top-bottom data field               | Modified in 6.4.2                        |
| .fieldLRLLabel               | Label for a left-right read-only data field.    |                                          |
| .fieldLRLLabel2              | Label for a left-right input data field         | New in 5.5 CU3<br>Modified in 6.4.2      |
| .fieldData                   | Data value for a data field                     | Modified in 5.5 CU3<br>Modified in 6.4.2 |

| <b>Class Name / Tag Name</b> | <b>Description</b>                                      | <b>Notes</b>                             |
|------------------------------|---------------------------------------------------------|------------------------------------------|
| .fieldData pre               | Preformatted data value for a data field                | Modified in 5.5 CU3<br>Modified in 6.4.2 |
| .fieldLRData                 | Data value for a left-right data field.                 | Modified in 6.4.2                        |
| .fieldRadioContOut           | Outer container for a group of radio buttons            |                                          |
| .fieldRadioCont              | Container for a group of radio buttons                  | New in 5.5 CU3                           |
| .fieldCbsContOut             | Outer container for a group of checkboxes               | New in 5.5 CU3                           |
| .fieldCbsCont                | Container for a group of checkboxes                     | New in 5.5 CU3                           |
| .queryCtlCont                | Container around the query controls on the finder page. | Modified in 6.4.2                        |

## **Auto Complete Classes**

Pick List auto complete

**Table 4-12: Auto Complete Classes**

| <b>Class Name / Tag Name</b> | <b>Description</b>                                                  | <b>Notes</b> |
|------------------------------|---------------------------------------------------------------------|--------------|
| .acData                      | Container for the auto complete control                             | New in 6.0   |
| .acTable                     | Table container for the auto complete control. Replaces .popupFrame | New in 6.0   |
| .acItem                      | Row item. Replaces .popupItem                                       | New in 6.0   |
| .acSelItem                   | Selected row item. Replaces .pItemSel                               | New in 6.0   |

## **Text**

Free-form text

**Table 4-13: Text**

| <b>Class Name / Tag Name</b> | <b>Description</b> | <b>Notes</b>        |
|------------------------------|--------------------|---------------------|
| .text                        | Normal text        | Modified in 5.5 CU3 |
| .errorText                   | Error text         |                     |

| <b>Class Name / Tag Name</b> | <b>Description</b> | <b>Notes</b>    |
|------------------------------|--------------------|-----------------|
| .exceptionText               | Exception text     | Modified in 6.3 |

## Message Box

Messages

**Table 4-14: Message Box**

| <b>Class Name / Tag Name</b> | <b>Description</b>                                                                                                | <b>Notes</b>                            |
|------------------------------|-------------------------------------------------------------------------------------------------------------------|-----------------------------------------|
| .msgSectCont                 | Message section container                                                                                         | Modified in 6.3.4                       |
| .msgCont                     | Message container                                                                                                 |                                         |
| .msgMain                     | Horizontally, the message is made up of 3 pieces: Left, Main (this is where the message text resides), and Right. | Changed in 5.5 CU3<br>Modified in 6.4.2 |
| .msgMain .bodySectInCont     | Redefine of the bodySectInCont for within .msgMain                                                                |                                         |
| .msgMain a                   | Redefine of anchors within .msgMain                                                                               |                                         |
| .msgTopBg                    | Background of the message top                                                                                     | Modified in 6.4.2                       |
| .msgBtmBg                    | Background of the message bottom                                                                                  | Modified in 6.4.2                       |
| .msgMainL                    | Left piece of the message main                                                                                    | Modified in 6.4.2                       |
| .msgMainR                    | Right piece of the message main                                                                                   | Modified in 6.4.2                       |
| .msgHead                     | Message header                                                                                                    | New in 5.5 CU3<br>Modified in 6.4.2     |
| .msgHeadErr                  | Message header error text                                                                                         | New in 5.5 CU3<br>Modified in 6.4.2     |
| .msgHeadWarn                 | Message header warning text                                                                                       | New in 5.5 CU3                          |
| .msgHeadInfo                 | Message header information text                                                                                   | New in 5.5 CU3                          |
| .msgError                    | Message error text                                                                                                | New in 6.4.2                            |
| .msgWarning                  | Message warning text                                                                                              | New in 6.4.2                            |

| <b>Class Name / Tag Name</b> | <b>Description</b>               | <b>Notes</b>                            |
|------------------------------|----------------------------------|-----------------------------------------|
| .msgInformation              | Message information text         | New in 6.4.2                            |
| .msgConfirmation             | Message confirmation text        | New in 6.4.2                            |
| .msgHeadConfirm              | Message header confirmation text | New in 5.5 CU3                          |
| .msgSub                      | Message subject                  | Changed 5.5 in CU3<br>Modified in 6.4.2 |
| .msgBodyCont                 | Message body container           | Changed 5.5 in CU3<br>Modified in 6.4.2 |
| .msgLine                     | Message body line of text        | Changed 5.5 in CU3<br>Modified in 6.4.2 |

## **Miscellaneous**

**Table 4-15: Miscellaneous**

| <b>Class Name / Tag Name</b> | <b>Description</b>                                                                                        | <b>Notes</b>                         |
|------------------------------|-----------------------------------------------------------------------------------------------------------|--------------------------------------|
| #userMenuBody                | ID of the user menu frame                                                                                 | New in 5.5 CU4                       |
| #bodyimage                   | Container for the navigation wheel on the start page.                                                     |                                      |
| #tooltip                     | Not used                                                                                                  |                                      |
| .box                         | A generic box. Uses include the saved query section on the finder and finder results screens and legends. | Modified in 6.3<br>Modified in 6.4.2 |
| .popMask                     | Used on the finder results. This disables the screen on certain operations.                               |                                      |
| #processingDiv               | Used on the finder results. Container for the message displayed during screen disabling.                  |                                      |
| .popupmenu                   | Not used                                                                                                  |                                      |
| .breadCrumbTrail             | Container for the bread crumb trail                                                                       | New in 6.2                           |

| <b>Class Name / Tag Name</b> | <b>Description</b>                                           | <b>Notes</b> |
|------------------------------|--------------------------------------------------------------|--------------|
| .TMPageProcessor             | Popup page processing message box for synchronous AJAX calls | New in 6.3.4 |

## **Various Icons**

List of classes used to display various icons

**Table 4-16: Various Icons**

| <b>Class Name / Tag Name</b>   | <b>Description</b>                                   | <b>Notes</b> |
|--------------------------------|------------------------------------------------------|--------------|
| .folderIconImage               | Folder icon, used in tree structure                  | New in 6.4.2 |
| .arrowMoveLeftButtonImage      | Move left image, used in tree structure              | New in 6.4.2 |
| .arrowMoveRightButtonImage     | Move right image, used in tree structure             | New in 6.4.2 |
| .arrowMoveUpButtonImage        | New move up image, used in tree structure            | New in 6.4.2 |
| .arrowMoveDownButtonImage      | New move down image, used in tree structure          | New in 6.4.2 |
| .xRemoveButtonImage            | Remove button image, used in tree structure          | New in 6.4.2 |
| .plusAddButtonImage            | Plus button image, used in tree structure            | New in 6.4.2 |
| .editButtonImage               | Edit button image, used in tree structure            | New in 6.4.2 |
| .radioRowSelected              | When a radio row is selected, used in tree structure | New in 6.4.2 |
| .pickListFinderLink            | Picklist finder icon                                 | New in 6.4.2 |
| .pickListNewLink               | Picklist new icon                                    | New in 6.4.2 |
| .pickListViewLink              | Picklist view icon                                   | New in 6.4.2 |
| .relatedLinksImage             | Related link icon                                    | New in 6.4.2 |
| .edit2_img                     | Edit 2 icon                                          | New in 6.4.2 |
| .delete2_img                   | Delete 2 icon                                        | New in 6.4.2 |
| .infoImgClass                  | Information icon                                     | New in 6.4.2 |
| .agentActionsNodeLabelCSSclass | Used for agent header >> Actions                     | New in 6.4.2 |
| .agentActionsIconsSpan         | Used for agent header >> Actions icons               | New in 6.4.2 |

| <b>Class Name / Tag Name</b>    | <b>Description</b>             | <b>Notes</b> |
|---------------------------------|--------------------------------|--------------|
| .moveRightEnabledImg            | Move right icon                | New in 6.4.2 |
| .moveAllRightEnabledImg         | Move all right icon            | New in 6.4.2 |
| .moveLeftEnabledImg             | Move left icon                 | New in 6.4.2 |
| .moveAllLeftEnabledImg          | Move all left icon             | New in 6.4.2 |
| .sortedUpImg                    | Sort up icon                   | New in 6.4.2 |
| .sortedDownImg                  | Sort down icon                 | New in 6.4.2 |
| .moveUpEnabledImg               | Move up icon                   | New in 6.4.2 |
| .moveDownEnabledImg             | Move down icon                 | New in 6.4.2 |
| .moveTopEnabledImg              | Move to the top icon           | New in 6.4.2 |
| .moveBottomEnabledImg           | Move to the bottom icon        | New in 6.4.2 |
| .addImg                         | Add icon                       | New in 6.4.2 |
| .volumeImg                      | Volume icon                    | New in 6.4.2 |
| .saveImg                        | Save icon                      | New in 6.4.2 |
| .undoImg                        | Undo icon                      | New in 6.4.2 |
| .batchUpdateImg                 | Batch update icon              | New in 6.4.2 |
| .saveConfigImg                  | Save configuration icon        | New in 6.4.2 |
| .actions_img_default            | Actions icon                   | New in 6.4.2 |
| .page_img_default               | Page icon                      | New in 6.4.2 |
| .edit2_img_default              | Edit 2 icon                    | New in 6.4.2 |
| .viewImgCont                    | View icon                      | New in 6.4.2 |
| .editUserMenuViewTreeNodeButton | Menu view button               | New in 6.4.3 |
| .editUserMenuEditTreeNodeButton | Menu edit button               | New in 6.4.3 |
| .bmRefreshLink                  | Business Monitor refresh image | New in 6.4.3 |
| .inputColorBrandingThemeVar     | Branding background color      | New in 6.4.3 |
| .open_down_img_alta             | Open down image                | New in 6.4.3 |

## **Power Data Classes**

Power data menu screens

**Table 4-17: Power Data Classes**

| <b>Class Name / Tag Name</b> | <b>Description</b>                                 | <b>Notes</b>      |
|------------------------------|----------------------------------------------------|-------------------|
| .pdCont                      | Container for the entire power data menu and links | Modified in 6.4.2 |
| .pdSubMenu                   | Power Data sub menu and links                      | Modified in 6.4.2 |
| .pdSubMenuTitle              | The title of a submenu                             | Modified in 6.4.2 |

## **Tab Classes**

**Table 4-18: Tab Classes**

| <b>Class Name / Tag Name</b> | <b>Description</b>            | <b>Notes</b>                           |
|------------------------------|-------------------------------|----------------------------------------|
| .tabLabelCont                | Container for a tab label     | Modified in 6.4.2                      |
| .subTabLabelCont             | Container for a sub tab label | Modified in 6.4.2                      |
| .tabCur                      | Current tab                   | Modified in 6.4.2                      |
| .subTabCur                   | Current sub tab               | Modified in 6.4.2<br>Modified in 6.4.3 |
| .tabDim                      | Non-current tab               | Modified in 6.4.2                      |
| .subTabDim                   | Non-current sub tab           | Modified in 6.4.2                      |

## **Unified Global Header Classes**

The classes used for the Navigator menu, Global Search, Favorites icon, Business Monitor icon, Notifications icon, Help icon, and Settings and Actions link are found in the Unified Global Header.

**Table 4-19: Unified Global Header Classes**

| <b>Class Name / Tag Name</b> | <b>Description</b>        | <b>Notes</b>                                                |
|------------------------------|---------------------------|-------------------------------------------------------------|
| .globalArea                  | The unified global header | Modified in 5.5 CU4<br>Modified in 6.2<br>Modified in 6.4.2 |

| <b>Class Name / Tag Name</b> | <b>Description</b>                                                          | <b>Notes</b>                      |
|------------------------------|-----------------------------------------------------------------------------|-----------------------------------|
| .msgCntChanged               | Style for when the message count dynamically changes                        | New in 5.5 CU4                    |
| #version                     | ID of the Version                                                           | New in 5.5 CU4<br>Modified in 6.2 |
| #welcome                     | ID of the Welcome                                                           | New in 5.5 CU4<br>Modified in 6.2 |
| #role                        | ID of the Role text                                                         | New in 5.5 CU4<br>Modified in 6.2 |
| #msgCenter                   | ID of the Message Center                                                    | New in 5.5 CU4                    |
| .globalArea .brandingArea    | Container for the branding area                                             | New in 6.2                        |
| .globalArea .topRight        | Container for the section holding the message center and user information   | New in 6.2                        |
| #closewindowicon             | Close icon on the global area within a window when 'opened in a new window' |                                   |
| #gc3helpicon2                | Help icon on the global area within a window when 'opened in a new window'  |                                   |

## **Ask Oracle Classes**

Ask Oracle tool bar

**Table 4-20: Ask Oracle Classes**

| <b>Class Name / Tag Name</b> | <b>Description</b>          | <b>Notes</b> |
|------------------------------|-----------------------------|--------------|
| #askarrow                    | Ask arrow                   |              |
| #askglog                     | Ask Oracle text             |              |
| #navwheelsm                  | Navigation Wheel            |              |
| #co                          | Container Optimization text |              |
| #containerbox                | Container image             |              |
| #airschedules                | Air Schedule text           |              |
| #airschedulesbox             | Air Schedule image          |              |

| <b>Class Name / Tag Name</b> | <b>Description</b>                  | <b>Notes</b> |
|------------------------------|-------------------------------------|--------------|
| #vesselsch                   | Vessel Schedule text                |              |
| #vesselbox                   | Vessel Schedule image               |              |
| #groundsch                   | Ground Schedule text                |              |
| #groundbox                   | Ground Schedule image               |              |
| #glogriq                     | Rates text                          |              |
| #glogriqbox                  | Rates image                         |              |
| #iriq                        | International Rates text            |              |
| #iriqbox                     | International Rates image           |              |
| #airport                     | Airport text                        |              |
| #airportbox                  | Airport image                       |              |
| #port                        | Port text                           |              |
| #portbox                     | Port image                          |              |
| #time                        | Time text                           |              |
| #timebox                     | Time image                          |              |
| #currency                    | Currency text                       |              |
| #currencybox                 | Currency image                      |              |
| #distance                    | Distance text                       |              |
| #distancebox                 | Distance image                      |              |
| #logisticsguide              | Logistics Guide text                |              |
| #logisticsguidebox           | Logistics Guide image               |              |
| #routingrule                 | Routing Rule text                   |              |
| #routingrulebox              | Routing Rule image                  |              |
| .footer1                     | Used on Container Optimization text |              |
| .footer2                     | Used on Container Optimization text |              |

## Calendar Classes

Calendar popup

**Table 4-21: Calendar Classes**

| <b>Class Name / Tag Name</b>   | <b>Description</b>             | <b>Notes</b>                                               |
|--------------------------------|--------------------------------|------------------------------------------------------------|
| .calendarIcon                  | Icon to display calendar       | New in 6.4.2                                               |
| .calendarSelectMonth           | Calendar month                 | New in 6.4.2                                               |
| .cal                           | Container for the calendar     | New in 5.5 CU5;<br>Changed in 6.0<br><br>Modified in 6.4.2 |
| .calDOWRow                     | Day of week row                | Modified in 6.4.2                                          |
| .calDOWTitle                   | Text for each day of week      | Modified in 5.5 CU5<br><br>Modified in 6.4.2               |
| .calPM                         | Previous month button          | New in 5.5 CU5<br><br>Modified in 6.4.2                    |
| .calNM                         | Next month button              | Modified in 6.4.2                                          |
| .calGrid                       | Calendar body (days)           | New in 6.0<br><br>Modified in 6.4.2                        |
| .calBody                       | Calendar body (days)           | Changed in CU3                                             |
| .calDay                        | Day                            | Modified in 6.4.2                                          |
| .calDayCur                     | Current day                    | Modified in 6.4.2                                          |
| .calDayDis                     | Days from the previous months  | Modified in 6.4.2                                          |
| .tm_chooseDate_spinbox         | Spin box to choose the year    | New in 6.0<br><br>Modified in 6.4.2                        |
| .tm_chooseDate_spinbox-content | Content of the spin box        | New in 6.0<br><br>Modified in 6.4.2                        |
| .tm_chooseDate_increment-cell  | Increment cell of the spin box | New in 6.0<br><br>Modified in 6.4.2                        |

| <b>Class Name / Tag Name</b>                  | <b>Description</b>                  | <b>Notes</b>                    |
|-----------------------------------------------|-------------------------------------|---------------------------------|
| .tm_chooseDate_decrement-cell                 | Decrement cell of the spin box      | New in 6.0<br>Modified in 6.4.2 |
| .tm_chooseDate_spinbox-cell                   |                                     | New in 6.0                      |
| .tm_chooseDate_spinbox-incrementor-icon-style | Increment icon link of the spin box | New in 6.0<br>Modified in 6.4.2 |
| .tm_chooseDate_spinbox-decrementor-icon-style | Decrement icon cell of the spin box | New in 6.0<br>Modified in 6.4.2 |

## **Volume Classes**

Volume popup

**Table 4-22: Volume Classes**

| <b>Class Name / Tag Name</b> | <b>Description</b>             | <b>Notes</b> |
|------------------------------|--------------------------------|--------------|
| .vol                         | Container for the volume popup | New in 6.3.7 |

## **Login Classes**

Login page

**Table 4-23: Login Classes**

| <b>Class Name / Tag Name</b> | <b>Description</b>           | <b>Notes</b>      |
|------------------------------|------------------------------|-------------------|
| .loginframe                  | Container for the login form |                   |
| .loginbutton                 | Login button                 | Modified in 6.4.2 |
| .copyright                   | Copyright text               | Modified in 6.4.2 |
| .signInText                  | Sign in text                 | New in 6.4.2      |
| .otmText                     | OTM text                     | New in 6.4.2      |
| .loginHeaderText             | Login header text            | New in 6.4.2      |
| .loginScreenFirstRow         | Login screen first row       | New in 6.4.2      |
| .loginScreenSecondRow        | Login screen second row      | New in 6.4.2      |

| <b>Class Name / Tag Name</b>        | <b>Description</b>                 | <b>Notes</b> |
|-------------------------------------|------------------------------------|--------------|
| .loginScreenTextUsernameAndPassword | Login screen username and password | New in 6.4.2 |
| velocitySplashImage                 | Velocity splash image              | New in 6.4.2 |
| velocitySplashImageWithShadow       | Velocity splash image with shadow  | New in 6.4.2 |
| oracleTradeMarkImage                | Trademark image                    | New in 6.4.2 |

## **Scroll Grid Classes**

Finder Results Grid

**Table 4-24: Scroll Grid Classes**

| <b>Class Name / Tag Name</b> | <b>Description</b>                     | <b>Notes</b>                                                |
|------------------------------|----------------------------------------|-------------------------------------------------------------|
| .sgContainer                 | Grid & toolbar container               | Modified in 6.3                                             |
| .sgContainerRow              | Grid container row (used for captions) | Modified in 6.4.2                                           |
| .sgTable                     | Grid container                         | New in 6.3<br>Modified in 6.4.2                             |
| .sgSection                   | Grid section                           | Modified in 6.3                                             |
| .sgSecBordLeft               | Grid section left border               |                                                             |
| .sgSubSection                | Grid subsection                        | Modified in 6.3                                             |
| .sgBodyRow                   | Grid body row                          | Modified in 5.5 CU4<br>Modified in 6.3<br>Modified in 6.4.2 |
| .sgTotalRow                  | Grid total row                         | Modified in 6.3                                             |
| .sgTreeRow                   | Grid tree row                          |                                                             |
| .sgBodyRowHighlighted        | Highlighted grid body row              | Modified in 6.4.2                                           |
| .sgBodyRowOdd                | Grid body row (odd)                    | Modified in 6.4.2                                           |
| .sgBodyRowEven               | Grid body row (even)                   | Modified in 6.4.2                                           |
| .sgBodyRowSelected           | Selected grid body row                 | Modified in 6.4.2                                           |

| <b>Class Name / Tag Name</b>          | <b>Description</b>                                                            | <b>Notes</b>        |
|---------------------------------------|-------------------------------------------------------------------------------|---------------------|
| .sgBodyRowHighlightedAndSelected      | Highlighted and selected grid body row                                        | Modified in 6.4.2   |
| .sgBodyCol                            | Grid body column                                                              | Modified in 5.5 CU4 |
|                                       |                                                                               | Modified in 6.3     |
|                                       |                                                                               | Modified in 6.4.2   |
| .sgBodyCol2 a                         | Added onto sgBodyCol (changes the anchor style)                               |                     |
| .sgTreeCol                            | Tree column                                                                   |                     |
| .sgBodyColFocus (and sgBodyCol:focus) | Grid body column that has focus. The former is for IE, the latter for Firefox |                     |
| .sgBodyColEdited                      | Grid body column that has been changed (not saved)                            |                     |
| .sgBodyColError                       | Grid body column that has an error                                            |                     |
| .sgBodyCheckCol                       | Grid body checkbox column                                                     | Modified in 6.2     |
|                                       |                                                                               | Modified in 6.3.4   |
|                                       |                                                                               | Modified in 6.4.2   |
| .sgBodyDurCol                         | Grid body duration column                                                     | New in 5.5 CU4      |
| .sgBodyNumCol                         | Grid body number column                                                       | New in 5.5 CU4      |
| .sgBodyUOMCol                         | Grid body UOM column                                                          | New in 5.5 CU4      |
| .sgBodyImgCol                         | Grid body image column                                                        | New in 5.5 CU4      |
|                                       |                                                                               | Modified in 6.3     |
|                                       |                                                                               | Modified in 6.4.2   |
| .sgBodyCheck                          | Grid body checkbox (applied to the <input> tag)                               | Modified in 6.3.4   |
| .sgSortAsc                            | Grid header ascending sort image                                              | Modified in 6.4.2   |
| .sgSortDes                            | Grid header descending sort image                                             | Modified in 6.4.2   |
| .sgCaptionCol                         | Grid caption column                                                           |                     |
| .sgCaptionColImg                      | Grid caption column image                                                     | Modified in 5.5 CU4 |

| <b>Class Name / Tag Name</b> | <b>Description</b>                                   | <b>Notes</b>                                                                   |
|------------------------------|------------------------------------------------------|--------------------------------------------------------------------------------|
| .sgCaptionColImg2            | Grid caption column image                            |                                                                                |
| .sgScroll                    | Scroller container                                   | New in 6.3                                                                     |
| .sgScrollSpace               | Scroller content area                                | New in 6.3                                                                     |
| .sgHeadRow                   | Grid header row                                      | Modified in 5.5 CU4<br>Modified in 6.0<br>Modified in 6.3<br>Modified in 6.4.2 |
| .sgHeadCol0                  | Grid header column for the first column in a section | Modified in 6.0<br>Modified in 6.3<br>Modified in 6.4.2                        |
| .sgHeadCol1                  | Grid header column for each subsequent columns       | Modified in 6.0<br>Modified in 6.2<br>Modified in 6.3<br>Modified in 6.4.2     |
| .sgHeadColVal                | Grid header column value                             | Modified in 6.3<br>Modified in 6.4.2                                           |
| .sgHeadColVal2 a             | Added onto sgHeadColVal (changes the anchor style)   |                                                                                |
| .sgHeadColVals               | Grid header column sortable value                    | Modified in 5.5 CU3<br>Modified in 6.0<br>Modified in 6.3<br>Modified in 6.4.2 |
| sgHeadColValHighlighted      | Currently unused                                     |                                                                                |
| .sgHeadCheck                 | Grid header checkbox                                 | Modified in 6.2<br>Modified in 6.3                                             |
| .sgImageButtonOn             | Not used                                             |                                                                                |
| .sgDivider                   | Not used                                             |                                                                                |

| <b>Class Name / Tag Name</b> | <b>Description</b>    | <b>Notes</b> |
|------------------------------|-----------------------|--------------|
| .sgEditCD                    | Grid editable control |              |
| div.sgMsg                    | Grid message box      |              |
| .sgRI                        | Column resize line    | New in 6.3   |

Finder Results Grid Images/Icons

**Table 4-25: Finder Results Grid Images/Icons**

| <b>Class Name / Tag Name</b> | <b>Description</b>             | <b>Notes</b> |
|------------------------------|--------------------------------|--------------|
| .sgConfigureResultsImgAlta   | Configure results icon         | New in 6.4.2 |
| .sgSaveConfigImgAlta         | Save configuration icon        | New in 6.4.2 |
| .sgRerunQueryImgAlta         | Rerun query icon               | New in 6.4.2 |
| .sgCreatePrintImgAlta        | Print icon                     | New in 6.4.2 |
| .sgAddImgAlta                | Add icon                       | New in 6.4.2 |
| .sgViewImgAlta               | View icon                      | New in 6.4.2 |
| .sgEditImgAlta               | Edit icon                      | New in 6.4.2 |
| .sgDeleteImgAlta             | Delete icon                    | New in 6.4.2 |
| .sgViewCriteriaImgAlta       | View criteria icon             | New in 6.4.2 |
| .finderActionButtonImg       | Finder button icon             | New in 6.4.2 |
| .finderToolbarSepImg         | Finder toolbar separator image | New in 6.4.2 |
| .finderButtonOnClick         | Finder button after click      | New in 6.4.2 |

### **Tree Control Classes**

**Table 4-26: Tree Control Classes**

| <b>Class Name / Tag Name</b> | <b>Description</b> | <b>Notes</b>                      |
|------------------------------|--------------------|-----------------------------------|
| .treeCont                    | Tree Container     | New in 5.5 CU4<br>Modified in 6.3 |

| <b>Class Name / Tag Name</b> | <b>Description</b>             | <b>Notes</b>                                           |
|------------------------------|--------------------------------|--------------------------------------------------------|
| .tree                        | Tree                           | Modified in 5.5 CU4<br>Modified in 6.4.2               |
| .tree .wrap                  | Used for wrappable nodes       | New in 5.5 CU4                                         |
| .tree .nodeInactiveL         | Inactive node (text section)   | New in 5.5 CU4<br>Modified in 6.3<br>Modified in 6.4.2 |
| .tree .nodeInactiveR         | Inactive node (button section) | New in 5.5 CU4<br>Modified in 6.3<br>Modified in 6.4.2 |
| .tree .nodeSelectedL         | Selected node (text section)   | New in 5.5 CU4<br>Modified in 6.3<br>Modified in 6.4.2 |
| .tree .nodeSelectedR         | Selected node (button section) | New in 5.5 CU4<br>Modified in 6.3<br>Modified in 6.4.2 |
| .tree .nodeFocused           | Focused node (text only)       | New in 5.5 CU4<br>Modified in 6.3<br>Modified in 6.4.2 |
| .tree .nodeFocusedL          | Focused node (text section)    | New in 5.5 CU4<br>Modified in 6.3<br>Modified in 6.4.2 |
| .tree .nodeFocusedR          | Focused node (button section)  | New in 5.5 CU4<br>Modified in 6.3<br>Modified in 6.4.2 |
| .tree .nodeDisabled          | Disabled node                  | New in 5.5 CU4                                         |
| .tree .nodeCancelled         | Cancelled node                 | New in 5.5 CU4                                         |

| <b>Class Name / Tag Name</b> | <b>Description</b>                                    | <b>Notes</b>                                           |
|------------------------------|-------------------------------------------------------|--------------------------------------------------------|
| .tree .node                  | Node                                                  | New in 5.5 CU4<br>Modified in 6.3<br>Modified in 6.4.2 |
| .tree .node pre              | Preformatted node text                                | New in 5.5 CU4                                         |
| .tree .node .oc              | Open / Close image container                          | New in 5.5 CU4<br>Modified in 6.3<br>Modified in 6.4.2 |
| .tree .node .e               | Empty image container (used when no open/close image) | New in 5.5 CU4<br>Modified in 6.3<br>Modified in 6.4.2 |
| .tree .node .i               | Icon container                                        | New in 5.5 CU4<br>Modified in 6.3<br>Modified in 6.4.2 |
| .tree .node .l               | Label (text) container                                | New in 5.5 CU4<br>Modified in 6.3<br>Modified in 6.4.2 |
| .tree .node .b               | Buttons container                                     | New in 5.5 CU4<br>Modified in 6.3<br>Modified in 6.4.2 |
| .tree .childPadding          | Used to indent the tree node children                 | New in 6.3<br>Modified in 6.4.2                        |

### **Simple Tree Control Classes**

**Table 4-27: Simple Tree Control Classes**

| <b>Class Name / Tag Name</b> | <b>Description</b> | <b>Notes</b> |
|------------------------------|--------------------|--------------|
|                              |                    |              |

| <b>Class Name / Tag Name</b> | <b>Description</b>             | <b>Notes</b>                             |
|------------------------------|--------------------------------|------------------------------------------|
| .simTreeCont                 | Tree container                 | New in 5.5 CU4<br>Modified in 6.4.2      |
| .simTree                     | Tree                           | Modified in 5.5 CU4<br>Modified in 6.4.2 |
| .simTree ul                  | Tree / Sub tree node container | New in 5.5 CU3                           |
| .simTree li                  | Node                           | Modified in 5.5 CU4<br>Modified in 6.4.2 |
| .simTree .nodeSelected       | Selected node                  | New in 5.5 CU4                           |
| .simTree .nodeFocused        | Focused node                   | New in 5.5 CU4                           |
| .simTree li pre              | Preformatted node text         | New in 5.5 CU4                           |
| .simTree .nodeCl             | Closed node                    | New in 5.5 CU3                           |

### **Simple Tree 2 Control Classes**

Used for trees without any decorations other than list styles

| <b>Class Name / Tag Name</b> | <b>Description</b>        | <b>Notes</b>        |
|------------------------------|---------------------------|---------------------|
| .simTree2Cont                | Tree container            | New in 5.5 CU4      |
| .simTree2                    | Tree                      | Modified in 5.5 CU4 |
| .simTree2 ul                 | Tree / Sub tree container | New in 5.5 CU3      |
| .simTree2 li                 | Node                      | Modified in 5.5 CU4 |
| .simTree2.nodeSelected       | Selected node             | New in 5.5 CU4      |
| .simTree2.nodeFocused        | Focused node              | New in 5.5 CU4      |
| .simTree2 li pre             | Preformatted node text    | New in 5.5 CU4      |
| .simTree2 .nodeCl            | Closed node               | New in 5.5 CU3      |
| .draggable                   | Drag container            | New in 5.5 CU4      |

## Main Menu Classes

These classes have been deprecated in version 6.4.2 and replaced with the Springboard.

**Table 4-28: Main Menu Classes**

| <b>Class Name / Tag Name</b> | <b>Description</b>                  | <b>Notes</b> |
|------------------------------|-------------------------------------|--------------|
| .mainMenuCont                | Menu container                      | New in 6.3   |
| .mainMenuTopNode             | Container for top level nodes       | New in 6.3   |
| .mainMenuChildCont           | Container for top level children    | New in 6.3   |
| .mainMenuChildNode           | Container for top level child nodes | New in 6.3   |
| .clFold                      | Container for the links             | New in 6.3   |
| .clFoldSub                   | Container for sublinks              | New in 6.3   |
| .clFoldSub2                  | Container for end links             | New in 6.3   |
| .mainMenuNode1               | Top level links                     | New in 6.3   |
| .mainMenuNode1 .disabled     | Disabled top level links            | New in 6.3   |
| . mainMenuNode2              | Second level links                  | New in 6.3   |
| .mainMenuNode2.disabled      | Disabled second level links         | New in 6.3   |
| . mainMenuNode3              | End links                           | New in 6.3   |
| .mainMenuNode3.disabled      | Disabled end level links            | New in 6.3   |

## Button Classes

Buttons

**Table 4-29: Button Classes**

| <b>Class Name / Tag Name</b> | <b>Description</b>                  | <b>Notes</b>      |
|------------------------------|-------------------------------------|-------------------|
| .buttonsCont                 | Container for a group of buttons    | Modified in 6.3   |
| .buttonCont                  | Container for a button              | Modified in 6.4.2 |
| .submitButtonBoxEnable       | Enabled submit button               | Modified in 6.3   |
| .submitButtonEnable          | Combined with submitButtonBoxEnable |                   |

| <b>Class Name / Tag Name</b> | <b>Description</b> | <b>Notes</b>      |
|------------------------------|--------------------|-------------------|
| .buttonCont .enButton        | Enabled button     | Modified in 6.3   |
|                              |                    | Modified in 6.4.2 |
| .buttonCont .disButton       | Disabled button    | Modified in 6.3   |
|                              |                    | Modified in 6.4.2 |

## **Context Menu Classes**

Includes Smart Links and other context menus

**Table 4-30: Context Menu Classes**

| <b>Class Name / Tag Name</b>      | <b>Description</b>           | <b>Notes</b>        |
|-----------------------------------|------------------------------|---------------------|
| .contextMenu                      | Menu Container               | Modified in 5.5 CU4 |
| .contextMenuItemContent           | Content                      | Modified in 5.5 CU4 |
| .contextMenuItemContent .menuTree | Tree within the context menu | New in 5.5 CU4      |

## **IWindow classes**

Used for internal windows such as Mass Update, Configure Results, Action Menu, SmartLinks, etc.

**Table 4-31: IWindow classes**

| <b>Class Name / Tag Name</b> | <b>Description</b>                      | <b>Notes</b>      |
|------------------------------|-----------------------------------------|-------------------|
| .iWin                        | Window container                        | New in 5.5 CU4    |
|                              |                                         | Modified in 6.4.2 |
| .iWinFrame                   | Window container (for use of <iframe>s) | New in 5.5 CU4    |
| .iWinFrameBody               | Window body (for use of <iframe>s)      | New in 5.5 CU4    |
| .iWinHeader                  | Window header container                 | New in 5.5 CU4    |
|                              |                                         | Modified in 6.3   |
|                              |                                         | Modified in 6.4.2 |
| .iWinTitle                   | Window title container                  | New in 5.5 CU4    |
|                              |                                         | Modified in 6.4.2 |

| <b>Class Name / Tag Name</b> | <b>Description</b>                                 | <b>Notes</b>                                           |
|------------------------------|----------------------------------------------------|--------------------------------------------------------|
| .iWinContent                 | Window content                                     | New in 5.5 CU4<br>Modified in 6.2                      |
| .iWinContentFit              | Window content (window resizes to fit the content) | New in 5.5 CU4                                         |
| .iWinFooter                  | Window footer container                            | New in 5.5 CU4<br>Modified in 6.3.4                    |
| .iWinHelp                    | Window help                                        | New in 5.5 CU4<br>Modified in 6.3<br>Modified in 6.4.2 |
| .iWinClose                   | Window close                                       | New in 5.5 CU4<br>Modified in 6.3<br>Modified in 6.4.2 |

### **Dock Scheduling / Decision Control Center / Advanced Layout Manager**

Classes used by the Dock Scheduling, Decision Control Center, and Advanced Layout Manager screens.

#### **Multiple Class Selectors**

**Table 4-32: Multiple Class Selectors**

| <b>Class Name / Tag Name</b> | <b>Description</b> | <b>Notes</b>   |
|------------------------------|--------------------|----------------|
| .p_TMMaximized               | Maximized          | New in 5.5 CU5 |
| .TMVisualRoot                | Visual Root        | New in 5.5 CU5 |
| .p_TMSelected                | Selected           | New in 5.5 CU5 |
| .p_TMIInactive               | Inactive           | New in 5.5 CU5 |
| .p_TMFocused                 | Focused            | New in 5.5 CU5 |
| .p_TMTextOnly                | Text only          | New in 6.0     |
| .p_TMEndOverflow             | Overflow items     | New in 6.0     |
| .p_TMDropTarget              | Drop target        | New in 5.5 CU5 |

| <b>Class Name / Tag Name</b> | <b>Description</b>                | <b>Notes</b> |
|------------------------------|-----------------------------------|--------------|
| p_TMBusy                     | Busy cursor                       | New in 6.1   |
| p_TMSorted                   | Sorted                            | New in 6.2   |
| p_TMTTextHighlight           | Used by IE8 for text highlighting | New in 6.3.3 |

**Table 4-33**

| <b>Class Name / Tag Name</b> | <b>Description</b>                         | <b>Notes</b>                                           |
|------------------------------|--------------------------------------------|--------------------------------------------------------|
| .tm_document                 | Added to the <body> element                | New in 5.5 CU5<br>Modified in 6.1<br>Modified in 6.4.2 |
| .tm_form                     | Added to the <form> element                | New in 5.5 CU5                                         |
| .RichUIBlockingDiv           | Used in creating the div that blocks input | New in 5.5 CU5                                         |

### Panel Stretch Layout

Splits a layout that enables the content in the center to stretch to fill all available space

**Table 4-34: Panel Stretch Layout**

| <b>Class Name / Tag Name</b> | <b>Description</b>             | <b>Notes</b>   |
|------------------------------|--------------------------------|----------------|
| .tm_panelStretchLayout       | Panel stretch layout container | New in 5.5 CU5 |

### Panel Group Layout

This section included the Layout element that arranges its children horizontally or vertically.

**Table 4-35: Panel Group Layout**

| <b>Class Name / Tag Name</b> | <b>Description</b>           | <b>Notes</b>   |
|------------------------------|------------------------------|----------------|
| .tm_panelGroupLayout         | Panel group layout container | New in 5.5 CU5 |

### Panel Form Layout

Positions input form controls

Also used on the volume control

**Table 4-36: Panel Form Layout**

| <b>Class Name / Tag Name</b>         | <b>Description</b>                         | <b>Notes</b>                        |
|--------------------------------------|--------------------------------------------|-------------------------------------|
| .tm_panelFormLayout                  | Panel Form Layout container                | New in 5.5 CU5                      |
| .TMPPanelFormLayoutContentCell       | Cell within the layout                     | New in 5.5 CU5<br>Modified in 6.4.2 |
| .TMPPanelFormLayoutButtonContentCell | Cell containing a button within the layout | New in 5.5 CU5                      |

### **Button Group**

Groups buttons together

**Table 4-37: Button Group**

| <b>Class Name / Tag Name</b> | <b>Description</b>         | <b>Notes</b>   |
|------------------------------|----------------------------|----------------|
| .tm_buttonGroup              | Button group container     | New in 5.5 CU5 |
| .tm_buttonGroup_button-cell  | Cell within a button group | New in 5.5 CU5 |

### **Command Button**

Button containing text, image, or text with an image

**Table 4-38: Command Button**

| <b>Class Name / Tag Name</b> | <b>Description</b> | <b>Notes</b>                                                                                   |
|------------------------------|--------------------|------------------------------------------------------------------------------------------------|
| .tm_commandButton            | Button             | New in 5.5 CU5<br>Modified in 6.0<br>Modified in 6.3<br>Modified in 6.3.3<br>Modified in 6.3.4 |

### **Table**

Displays tabular data

**Table 4-39: Table**

| <b>Class Name / Tag Name</b>                | <b>Description</b>                 | <b>Notes</b>                                         |
|---------------------------------------------|------------------------------------|------------------------------------------------------|
| .tm_table                                   | Table container                    | New in 5.5 CU5                                       |
| .tm_column_column-header                    | Header                             | New in 5.5 CU5                                       |
| .tm_column_select-all-header                | Header select all cell             | New in 6.0                                           |
| .tm_column_column-header-fixed-table        | Header fixed table                 | New in 5.5 CU5                                       |
| .tm_column_column-header-cell-sizer         | Header size cell                   | New in 5.5 CU5<br>Modified in 6.3                    |
| .tm_column_column-header-cell               | Header cell                        | New in 5.5 CU5<br>Modified in 6.0<br>Modified in 6.2 |
| .tm_column_column-header-scroll-div         | Header scroll div                  | New in 5.5 CU5                                       |
| .tm_column_column-header-scroll-table       | Header scroll table                | New in 5.5 CU5                                       |
| .tm_column-sort-ascending-icon-style        | Ascending sort icon                | New in 6.2                                           |
| .tm_column-sort-descending-icon-style       | Descending sort icon               | New in 6.2                                           |
| .tm_column-sort-indicator                   | Sort container for unsorted column | New in 6.2                                           |
| .tm_column-sortable-column-header-container | Sort container for sorted column   | New in 6.2                                           |
| .tm_table_data-table                        | Data table                         | New in 5.5 CU5<br>Modified in 6.3.4                  |
| .tm_table_data-table-noV                    | Data (no vertical lines)           | New in 6.0<br>Modified in 6.3.4                      |
| .tm_table_data-row-odd                      | Data row (odd number)              | New in 5.5 CU5<br>Modified in 6.0                    |
| .tm_table_data-row-even                     | Data row (even number)             | New in 5.5 CU5<br>Modified in 6.0                    |
| .tm_column_data-cell                        | Data cell                          | New in 5.5 CU5                                       |

| <b>Class Name / Tag Name</b>    | <b>Description</b>                              | <b>Notes</b>                  |
|---------------------------------|-------------------------------------------------|-------------------------------|
| .tm_column_data-cell1           | Data cell (no border)                           | New in 5.5 CU5                |
| .tm_column_data-cell2           | Data cell (no left border)                      | New in 5.5 CU5                |
| .tm_column_data-cell3           | Data cell (no right border)                     | New in 5.5 CU5                |
| .tm_column_data-cell-current    | Current data cell (used for Dock Scheduling)    | New in 5.5 CU5                |
| .tm_column_data-cell-fixed      | Fixed data cell (used for Dock Scheduling)      | New in 5.5 CU5                |
| .tm_column_data-cell-disabled   | Disabled data cell (used for Dock Scheduling)   | New in 5.5 CU5                |
| .tm_column_data-cell-infeasible | Infeasible data cell (used for Dock Scheduling) | New in 5.5 CU5                |
| .tm_column_data-cell-blocked    | Blocked data cell (used for Dock Scheduling)    | New in 5.5 CU5                |
| .tm_column_data-cell-edited     | Edited data cell (used for Dock Scheduling)     | New in 5.5 CU5                |
| .tm_column_data-cell-standing   | Standing data cell (used for Dock Scheduling)   | New in 5.5 CU5                |
| .tm_column_data-cell-uom        | UOM data cell                                   | New in 5.5 CU5                |
| .tm_column_data-cell-num        | Number data cell                                | New in 5.5 CU5                |
| .tm_column_data-cell-dur        | Duration data cell                              | New in 5.5 CU5                |
| .tm_column_data-cell-img        | Image data cell                                 | New in 5.5 CU5                |
| .tm_column_data-cell-db-ship    | Shipment data cell                              | New in 6.0<br>Modified in 6.3 |
| .tm_column_data-cell-db-unavail | Unavailable data cell (used for Dispatch Board) | New in 6.0<br>Modified in 6.3 |
| .tm_column_data-cell-db-avail   | Available data cell (used for Dispatch Board)   | New in 6.0<br>Modified in 6.3 |
| .tm_column_data-cell-db-work    | Working data cell (used for Dispatch Board)     | New in 6.0<br>Modified in 6.3 |

| <b>Class Name / Tag Name</b>      | <b>Description</b>                                                         | <b>Notes</b>                  |
|-----------------------------------|----------------------------------------------------------------------------|-------------------------------|
| .tm_column_data-cell-db-notwork   | Not working data cell (used for Dispatch Board)                            | New in 6.0<br>Modified in 6.3 |
| .tm_column_data-cell-bl           | Data cell (border left)                                                    | New in 6.0                    |
| .tm_column_data-cell-br           | Data cell (border right)                                                   | New in 6.0                    |
| .tm_table_data-body               | Data body                                                                  | New in 5.5 CU5                |
| .tm_column_row-header-cell        | Row header cell                                                            | New in 5.5 CU5                |
| .tm_table_data_scroll_div         | Data scroll section div                                                    | New in 5.5 CU5                |
| .tm_table_data_scroll_table       | Data scroll section table                                                  | New in 5.5 CU5                |
| .tm_column_frozen_border          | Border that differentiates the frozen and scrollable portions of the table | New in 5.5 CU5                |
| .tm_column_day_border             | Border that differentiates between different days                          | New in 5.5 CU5                |
| .tm_table_column-resize-indicator | Column resize indicator                                                    | New in 5.5 CU5                |
| .tm_table_status_message          | Status message container                                                   | New in 6.1                    |

## Menu

A vertical menu component

**Table 4-40: Menu**

| <b>Class Name / Tag Name</b>  | <b>Description</b>        | <b>Notes</b>               |
|-------------------------------|---------------------------|----------------------------|
| .tm_menu_child-container      | Menu child container      | New in 5.5 CU5             |
| .tm_menu_separator-row        | Separator row             | New in 6.0                 |
| .tm_menu_item-empty-cell      | Empty cell                | New in 6.0                 |
| .tm_menu_separator            | Menu item separator       | New in 6.0                 |
| .tm_menu_scroll-box           | Menu scroll box container | New in 6.0                 |
| .tm_menu_scroll-up-icon-style | Scroll box up             | New in 6.0<br>Modified 6.3 |

| <b>Class Name / Tag Name</b>     | <b>Description</b>     | <b>Notes</b>                  |
|----------------------------------|------------------------|-------------------------------|
| .tm_menu_scroll-down-icon-style  | Scroll box down        | New in 6.0<br>Modified in 6.3 |
| .tm_menu_submenu-icon-style      | Submenu icon           | New in 6.0                    |
| .tm_menu_submenu                 | Submenu container      | New in 6.1                    |
| .tm_menu_submenu_text            | Submenu text           | New in 6.1                    |
| .tm_menu_submenu-open-indicator  | Submenu open indicator | New in 6.1                    |
| .tm_menu_submenu-open-icon-style | Submenu open icon      | New in 6.1                    |

### Command Menu

Item in a menu

**Table 4-41: Command Menu**

| <b>Class Name / Tag Name</b>                   | <b>Description</b>          | <b>Notes</b>                      |
|------------------------------------------------|-----------------------------|-----------------------------------|
| .tm_commandMenuItem_menu-item                  | Menu item container         | New in 5.5 CU5                    |
| .tm_commandMenuItem_menu-item-text             | Menu item text              | New in 5.5 CU5                    |
| .tm_commandMenuItem_menu-item-accelerator      | Menu item accelerator       | New in 5.5 CU5                    |
| .tm_commandMenuItem_menu-item-open-indicator   | Menu item open indicator    | New in 5.5 CU5                    |
| .tm_commandMenuItem_menu-item-icon-style       | Menu item icon              | New in 5.5 CU5                    |
| .tm_commandMenuItem_menu-item-check-icon-style | Menu item checkbox icon     | New in 5.5 CU5<br>Modified in 6.3 |
| .tm_commandMenuItem_menu-item-radio-icon-style | Menu item radio button icon | New in 5.5 CU5<br>Modified in 6.3 |
| .tm_commandMenuItem_menu-item-empty-cell       | Empty space                 | New in 5.5 CU5                    |

### Show Detail Header

Provides a means of toggling the contents under a header from being shown or hidden

**Table 4-42: Show Detail Header**

| <b>Class Name / Tag Name</b> | <b>Description</b> | <b>Notes</b> |
|------------------------------|--------------------|--------------|
|                              |                    |              |

| <b>Class Name / Tag Name</b>                                              | <b>Description</b>                              | <b>Notes</b>                          |
|---------------------------------------------------------------------------|-------------------------------------------------|---------------------------------------|
| .tm_showDetailHeader0 - .tm_showDetailHeader5                             | Show Detail Header container (levels 0 – 5)     | New in 5.5 CU5                        |
| .tm_showDetailHeader_table0 - .tm_showDetailHeader_table5                 | Show Detail Header table (levels 0 – 5)         | New in 5.5 CU5                        |
| .tm_showDetailHeader_title0 - .tm_showDetailHeader_title5                 | Show Detail Header title (levels 0 – 5)         | New in 5.5 CU5                        |
| .tm_showDetailHeader_disclosure-icon-container                            | Disclosure icon container                       | New in 5.5 CU5                        |
| .tm_showDetailHeader_disclosure-link                                      | Disclosure link                                 | New in 5.5 CU5                        |
| .tm_showDetailHeader_title-text0 - .tm_showDetailHeader_title-text5       | Show Detail Header title text (levels 0 – 5)    | New in 5.5 CU5                        |
| .tm_showDetailHeader_title-content0 - .tm_showDetailHeader_title-content5 | Show Detail Header title content (levels 0 – 5) | New in 5.5 CU5                        |
| .tm_showDetailHeader_title-start0 - .tm_showDetailHeader_title-start5     | Show Detail Header title start (levels 0 – 5)   | New in 5.5 CU5                        |
| .tm_showDetailHeader_title-end0 - .tm_showDetailHeader_title-end5         | Show Detail Header title end (levels 0 – 5)     | New in 5.5 CU5                        |
| .tm_showDetailheader_context-container                                    | Context container                               | New in 5.5 CU5                        |
| .tm_showDetailHeader_dynamic-help-icon-container                          | Show Detail Header help icon container          | New in 5.5 CU5                        |
| .tm_showDetailHeader_dynamic-help-icon-style                              | Show Detail Header help icon                    | New in 5.5 CU5<br><br>Modified in 6.3 |

## Navigation Pane

A series of navigation items

**Table 4-43: Navigation Pane**

| <b>Class Name / Tag Name</b> | <b>Description</b>        | <b>Notes</b>   |
|------------------------------|---------------------------|----------------|
| .tm_navigationPane           | Navigation pane container | New in 5.5 CU5 |
| .tm_navigationPane-bar       | Navigation pane bar       | New in 5.5 CU5 |

| <b>Class Name / Tag Name</b>                    | <b>Description</b>       | <b>Notes</b>   |
|-------------------------------------------------|--------------------------|----------------|
| .tm_navigationPane-bar_icon-style               | Not implemented          | New in 5.5 CU5 |
| .tm_navigationPane-bar_link                     | Not implemented          | New in 5.5 CU5 |
| .tm_navigationPane-bar_start-overflow-indicator | Not implemented          | New in 5.5 CU5 |
| .tm_navigationPane-bar_end-overflow-indicator   | Not implemented          | New in 5.5 CU5 |
| .tm_navigationPane-bar_overflow-container       | Not implemented          | New in 5.5 CU5 |
| .tm_navigationPane-bar_overflow_spacer          | Not implemented          | New in 5.5 CU5 |
| .tm_navigationPane-bar_body                     | Navigation pane bar body | New in 5.5 CU5 |
| .tm_navigationPane-bar_access-key               | Not implemented          | New in 5.5 CU5 |

### Message

Displays a message

**Table 4-44: Message**

| <b>Class Name / Tag Name</b> | <b>Description</b>                            | <b>Notes</b>   |
|------------------------------|-----------------------------------------------|----------------|
| .tm_message                  | Message container                             | New in 5.5 CU5 |
| .tm_message_type             | Type of message (Error, Warning, Information) | New in 5.5 CU5 |
| .tm_message_detail           | Message content                               | New in 5.5 CU5 |

### Panel Header

Similar to the Show Detail Header without the toggling

**Table 4-45: Panel Header**

| <b>Class Name / Tag Name</b>                    | <b>Description</b>                    | <b>Notes</b>                      |
|-------------------------------------------------|---------------------------------------|-----------------------------------|
| .tm_panelHeader_table0 - .tm_panelHeader_table5 | Panel header container (levels 0 – 5) | New in 5.5 CU5                    |
| .tm_panelHeader_title0 - .tm_panelHeader_title5 | Panel header title (levels 0 – 5)     | New in 5.5 CU5<br>Modified in 6.3 |

| <b>Class Name / Tag Name</b>                                | <b>Description</b>                      | <b>Notes</b>                                                                             |
|-------------------------------------------------------------|-----------------------------------------|------------------------------------------------------------------------------------------|
| .tm_panelHeader_title-text0 - .tm_panelHeader_title-text5   | Panel header title text (levels 0 – 5)  | New in 5.5<br>CU5                                                                        |
| .tm_panelHeader_content0 - .tm_panelHeader_content5         | Panel header content (levels 0-5)       | New in 5.5<br>CU5                                                                        |
| .tm_panelHeader_title_start0 - .tm_panelHeader_title_start5 | Panel header title start (levels 0 – 5) | New in 5.5<br>CU5                                                                        |
| .tm_panelHeader_title_end0 - .tm_panelHeader_title_end5     | Panel header title end (levels 0 – 5)   | New in 5.5<br>CU5                                                                        |
| .tm_panelHeader_context-container                           | Context container                       | New in 5.5<br>CU5                                                                        |
| .tm_panelHeader_dynamic-help-icon-container                 | Panel header help icon container        | New in 5.5<br>CU5<br><br>Modified in 6.3                                                 |
| .tm_panelHeader_dynamic-help-icon-style                     | Panel header help icon                  | New in 5.5<br>CU5<br><br>Modified in 6.0<br><br>Modified in 6.3<br><br>Modified in 6.4.2 |
| .tm_panelHeader_toolbar                                     | Panel header toolbar                    | New in 6.0                                                                               |

### Panel Collection

Surrounds a table to display menus, toolbars, and status bar items

**Table 4-46: Panel Collection**

| <b>Class Name / Tag Name</b> | <b>Description</b>         | <b>Notes</b>                                               |
|------------------------------|----------------------------|------------------------------------------------------------|
| .tm_panelCollection          | Panel collection container | New in 6.0<br><br>Modified in 6.1<br><br>Modified in 6.3.4 |

| <b>Class Name / Tag Name</b>             | <b>Description</b>    | <b>Notes</b>                  |
|------------------------------------------|-----------------------|-------------------------------|
| .tm_panelCollection_statusbar-text-item  | Statusbar text        | New in 6.0<br>Modified in 6.3 |
| .tm_panelCollection_statusbar-count-item | Status bar count text | New in 6.0<br>Modified in 6.3 |

## Toolbox

A container for Toolbars and Menu Bars

**Table 4-47: Toolbox**

| <b>Class Name / Tag Name</b> | <b>Description</b>   | <b>Notes</b>                  |
|------------------------------|----------------------|-------------------------------|
| .tm_toolbox                  | Toolbox container    | New in 6.0                    |
| .tm_toolbox_body             | Toolbox body         | New in 6.0                    |
| .tm_toolbox_row              | Toolbox row          | New in 6.0                    |
| .tm_toolbox_last-row         |                      | Modified in 6.3               |
| .tm_toolbox_leading-cell     | Toolbox leading cell | New in 6.0<br>Modified in 6.3 |
| .tm_toolbox_last-cell        | Toolbox last cell    | New in 6.0                    |

## Menu Bar

Container for a menu

**Table 4-48: Menu Bar**

| <b>Class Name / Tag Name</b> | <b>Description</b> | <b>Notes</b> |
|------------------------------|--------------------|--------------|
| .tm_menuBar                  | Menu bar container | New in 6.0   |
| .tm_menuBar_enabled          | Not implemented    | New in 6.0   |
| .tm_menuBar_selected         | Not implemented    | New in 6.0   |
| .tm_menuBar_separator        | Menu bar separator | New in 6.0   |
| .tm_menuBar_body             | Not implemented    | New in 6.0   |
| .tm_menuBar_title            | Not implemented    | New in 6.0   |

| <b>Class Name / Tag Name</b>      | <b>Description</b>    | <b>Notes</b> |
|-----------------------------------|-----------------------|--------------|
| .tm_menuBar_empty                 | Not implemented       | New in 6.0   |
| .tm_menu_bar-item-content         | Menu bar item content | New in 6.0   |
| .tm_menu_bar-item-open-icon-style | Menu bar open icon    | New in 6.0   |
| .tm_menu_bar-item-access-key      | Not implemented       | New in 6.0   |
| .tm_menu_bar-item                 | Menu bar item         | New in 6.0   |
| .tm_menu_bar-item-text            | Menu bar item text    | New in 6.0   |

## Toolbar

Container for Command Toolbar Buttons

**Table 4-49: Toolbar**

| <b>Class Name / Tag Name</b>   | <b>Description</b>         | <b>Notes</b>                  |
|--------------------------------|----------------------------|-------------------------------|
| .tm_toolbar_overflow-container | Toolbar overflow container | New in 6.0                    |
| .tm_toolbar_overflow-indicator | Toolbar overflow indicator | New in 6.0                    |
| .tm_toolbar_overflow-spacer    | Toolbar overflow spacer    | New in 6.0                    |
| .tm_toolbar                    | Toolbar container          | New in 6.0                    |
| .tm_toolbar_body               | Toolbar body               | New in 6.0                    |
| .tm_toolbar_item               | Toolbar item               | New in 6.0                    |
| .tm_toolbar_separator          | Toolbar separator          | New in 6.0<br>Modified in 6.3 |

## Command Toolbar Button

Buttons in a toolbar

**Table 4-50: Command Toolbar Button**

| <b>Class Name / Tag Name</b>             | <b>Description</b>              | <b>Notes</b> |
|------------------------------------------|---------------------------------|--------------|
| .tm_commandToolbarButton_image-hover     | Not implemented                 | New in 6.0   |
| .tm_commandToolbarButton_image-depressed | Command toolbar image depressed | New in 6.0   |

| <b>Class Name / Tag Name</b>                 | <b>Description</b>                  | <b>Notes</b>                    |
|----------------------------------------------|-------------------------------------|---------------------------------|
| .tm_commandToolbarButton                     | Command toolbar container           | New in 6.0<br>Modified in 6.3.4 |
| .tm_commandToolbarButton_link                | Command toolbar link (text)         | New in 6.0<br>Modified in 6.3   |
| .tm_commandToolbarButton_text                | Command toolbar text                | New in 6.0                      |
| .tm_commandToolbarButton_dropdown-cell       | Not implemented                     | New in 6.0<br>Modified in 6.3   |
| .tm_commandToolbarButton_dropdown-icon-style | Command toolbar dropdown icon style | New in 6.0<br>Modified in 6.3   |
| .tm_commandToolbarButton_image               | Command toolbar button image        | New in 6.0                      |

## Panel Splitter

Divides a region into two parts with a repositional divider

**Table 4-51: Panel Splitter**

| <b>Class Name / Tag Name</b>             | <b>Description</b>                      | <b>Notes</b>                  |
|------------------------------------------|-----------------------------------------|-------------------------------|
| .tm_panelSplitter                        | Panel splitter container                | New in 6.0                    |
| .tm_panelSplitter_vertical-icon-style    | Panel splitter vertical icon            | New in 6.0                    |
| .tm_panelSplitter_horizontal-icon-style  | Panel splitter horizontal icon          | New in 6.0                    |
| .tm_panelSplitter_pane                   | Panel splitter pane                     | New in 6.0                    |
| .tm_panelSplitter_horizontal-divider     | Panel splitter horizontal divider       | New in 6.0<br>Modified in 6.3 |
| .tm_panelSplitter_vertical-divider       | Panel splitter vertical divider         | New in 6.0<br>Modified in 6.3 |
| .tm_panelSplitter_horizontal-highlighter | Panel splitter horizontal (highlighted) | New in 6.0<br>Modified in 6.3 |

| <b>Class Name / Tag Name</b>           | <b>Description</b>                    | <b>Notes</b>                  |
|----------------------------------------|---------------------------------------|-------------------------------|
| .tm_panelSplitter_vertical-highlighter | Panel splitter vertical (highlighted) | New in 6.0<br>Modified in 6.3 |

## Miscellaneous

**Table 4-52: Miscellaneous**

| <b>Class Name / Tag Name</b> | <b>Description</b>                                                | <b>Notes</b>                      |
|------------------------------|-------------------------------------------------------------------|-----------------------------------|
| .tm_input_label              | Input control label                                               | New in 6.0                        |
| .tm_input_label-LR           | Input control label for left (label)-right (input field) controls | New in 6.3                        |
| .tm_commandLink              | Link to launch internal window                                    | New in 6.0<br>Modified in 6.3     |
| .tm_goLink                   | Link to launch external window                                    | New in 6.3.2<br>Modified in 6.3.4 |

## Panel Tabbed

Collection of tabs

**Table 4-53: Panel Tabbed**

| <b>Class Name / Tag Name</b> | <b>Description</b>                                   | <b>Notes</b> |
|------------------------------|------------------------------------------------------|--------------|
| .tm_panelTabbed_tab-boundary | Tab collection boundary                              | New in 6.1   |
| .tm_panelTabbed              | Tab collection container                             | New in 6.1   |
| .tm_panelTabbed_header       | Container for tab collection for tabs showing at top | New in 6.1   |
| .tm_panelTabbed_footer       | Container for tab collection showing at bottom       | New in 6.1   |
| .tm_panelTabbed_body         | Tab collection body                                  | New in 6.1   |
| .tm_panelTabbed_tab          | Tab container                                        | New in 6.1   |
| .tm_panelTabbed_tab-selected | Current tab                                          | New in 6.1   |

| <b>Class Name / Tag Name</b>                  | <b>Description</b>               | <b>Notes</b> |
|-----------------------------------------------|----------------------------------|--------------|
| .tm_panelTabbed_cell-start                    | Start of tab                     | New in 6.1   |
| .tm_panelTabbed_cell-end                      | End of tab                       | New in 6.1   |
| .tm_panelTabbed_tab-start                     | Start of collection of tabs      | New in 6.1   |
| .tm_panelTabbed_tab-end                       | End of collection of tabs        | New in 6.1   |
| .tm_panelTabbed_tab-content                   | Tab content                      | New in 6.1   |
| .tm_panelTabbed_icon-style                    | Tab icon                         | New in 6.1   |
| .tm_panelTabbed_tab-text-link                 | Tab link (text)                  | New in 6.1   |
| .tm_panelTabbed_disclosed-remove-icon-style   | Not implemented                  | New in 6.1   |
| .tm_panelTabbed_undisclosed-remove-icon-style | Not implemented                  | New in 6.1   |
| .tm_panelTabbed_tab-start                     | Start of tab                     | New in 6.1   |
| .tm_panelTabbed_tab-end                       | End of tab                       | New in 6.1   |
| .tm_panelTabbed_overflow-container            | Tab container overflow container | New in 6.1   |
| .tm_panelTabbed_overflow-spacer               | Tab container overflow spacer    | New in 6.1   |
| .tm_panelTabbed_start-overflow-indicator      | Tab container start overflow     | New in 6.1   |
| .tm_panelTabbed_end-overflow-indicator        | Tab container end overflow       | New in 6.1   |

## Tree

**Table 4-54: Tree**

| <b>Class Name / Tag Name</b>  | <b>Description</b> | <b>Notes</b>                  |
|-------------------------------|--------------------|-------------------------------|
| .tm_tree_node-stamp-text      | Node text          | New in 6.1                    |
| .tm_tree_data-row             | Node row           | New in 6.1                    |
| .tm_tree_expanded-icon-style  | Expand icon        | New in 6.1                    |
| .tm_tree_collapsed-icon-style | Collapse icon      | New in 6.1                    |
| .tm_tree_leaf-icon-style      | Leaf icon          | New in 6.1<br>Modified in 6.3 |

| <b>Class Name / Tag Name</b>  | <b>Description</b>  | <b>Notes</b> |
|-------------------------------|---------------------|--------------|
| .tm_tree_node-anim-icon-style | Node animation icon | New in 6.1   |
| .tm_tree_selector-icon-style  | Node icon           | New in 6.1   |
| .tm_tree                      | Tree container      | New in 6.1   |
| .tm_tree_status-message       | Node status message | New in 6.1   |
| .tm_tree_data-cell            | Node container      | New in 6.1   |

## Map

These only affect maps in the Advanced Layout and related actions. To change Workbench related maps, refer to the online help and related Logic Configuration parameters.

**Table 4-55: Map**

| <b>Class Name / Tag Name</b> | <b>Description</b>                            | <b>Notes</b> |
|------------------------------|-----------------------------------------------|--------------|
| .tm_map                      | Map container                                 | New in 6.3   |
| .tm_map-distAreaPanel        | Map distance/area content                     | New in 6.3   |
| .tm_map-infoPanelLeft        | Map lat/long information left cell            | New in 6.3   |
| .tm_map-infoPanelRight       | Map lat/long information right cell           | New in 6.3   |
| .tm_map-infoPanelCenter      | Map lat/long information content cell         | New in 6.3   |
| .tm_map_xPanel               | Map lat/long latitude content                 | New in 6.3   |
| .tm_map_yPanel               | Map lat/long longitude content                | New in 6.3   |
| .tm_map-infoWindowTitle      | Map FOI info window title                     | New in 6.3   |
| .tm_map-infoWindowTable      | Map FOI info window content                   | New in 6.3   |
| .tm_map-infoWindowSwatch     | Not used                                      |              |
| .tm_map-copyrightText        | Map copyright text                            | New in 6.3   |
| .tm_map-mapSwitchOver        | Used for switching map views. Not implemented | New in 6.3   |
| .tm_map-mapSwitchSelect      | Used for switching map views. Not implemented | New in 6.3   |
| .tm_map-mapSwitchNotSelect   | Used for switching map views. Not implemented | New in 6.3   |

| <b>Class Name / Tag Name</b> | <b>Description</b>                | <b>Notes</b> |
|------------------------------|-----------------------------------|--------------|
| .tm_mapToolbar               | Map toolbar                       | New in 6.3   |
| .tm_mapToolbar-separator     | Map toolbar separator             | New in 6.3   |
| .tm_map-built-in-large       | System default large marker       | New in 6.3   |
| .tm_map-built-in-large-text  | System default large marker text  | New in 6.3   |
| .tm_map-built-in-medium      | System default medium marker      | New in 6.3   |
| .tm_map-built-in-medium-text | System default medium marker text | New in 6.3   |
| .tm_map-built-in-small       | System default small marker       | New in 6.3   |
| .tm_map-built-in-small-text  | System default small marker text  | New in 6.3   |
| .tm_map-built-in-ball        | System default ball marker        | New in 6.3   |
| .tm_map-built-in-ball-text   | System default ball marker text   | New in 6.3   |

## Select Controls

**Table 4-56: Select Controls**

| <b>Class Name / Tag Name</b>                    | <b>Description</b>            | <b>Notes</b> |
|-------------------------------------------------|-------------------------------|--------------|
| .tm_selectManyListbox-content-input             | Input control                 | New in 6.3   |
| .tm_selectManyListbox-options                   | Options                       | New in 6.3   |
| .tm_selectManyListbox-item                      | Item                          | New in 6.3   |
| .tm_selectManyListbox-separator                 | Separator                     | New in 6.3   |
| .tm_selectManyChoice-content-input              | Input control                 | New in 6.3   |
| .tm_selectManyChoice-item                       | Item                          | New in 6.3   |
| .tm_selectManyChoice-dropdown                   | Dropdown container            | New in 6.3   |
| .tm_selectManyChoice-dropdown-icon-style        | Dropdown icon                 | New in 6.3   |
| .tm_selectOneChoice-dropdown                    | Dropdown container            | New in 6.3   |
| .tm_selectOneChoice-content                     | Content container             | New in 6.3   |
| .tm_selectOneChoice-compact-dropdown            | Compact-version dropdown      | New in 6.3   |
| .tm_selectOneChoice-compact-dropdown-icon-style | Compact version dropdown icon | New in 6.3   |

## ***Popup***

Container control used in popup windows

**Table 4-57: Popup**

| <b>Class Name / Tag Name</b> | <b>Description</b>                                                                                                                                                           | <b>Notes</b>                                         |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|
| .TMPopupMenuPopup            | Popup container                                                                                                                                                              | New in 5.5 CU5<br>Modified in 6.3.7                  |
| .TMPopupMenuContent          | Popup content                                                                                                                                                                | New in 5.5 CU5                                       |
| .TMPopupSelector             | Popup window used to display controls as a popup selector. E.g., the Selection Configuration popup on an advanced layout map. This is the container. Update this text maybe. | New in 6.3<br>Modified in 6.3.7<br>Modified in 6.4.2 |
| .TMPopupSelectorHeader       | Header center column                                                                                                                                                         | New in 6.3<br>Modified in 6.4.2                      |
| .TMPopupSelectorHeaderStart  | Header start column                                                                                                                                                          | New in 6.3<br>Modified in 6.4.2                      |
| .TMPopupSelectorHeaderEnd    | Header end column                                                                                                                                                            | New in 6.3<br>Modified in 6.4.2                      |
| .TMPopupSelectorContentStart | Content start column                                                                                                                                                         | New in 6.3<br>Modified in 6.4.2                      |
| .TMPopupSelectorContentEnd   | Content end column                                                                                                                                                           | New in 6.3<br>Modified in 6.4.2                      |
| .TMPopupSelectorFooter       | Footer center column                                                                                                                                                         | New in 6.3                                           |
| .TMPopupSelectorFooterStart  | Footer start column                                                                                                                                                          | New in 6.3                                           |
| .TMPopupSelectorFooterEnd    | Footer end column                                                                                                                                                            | New in 6.3                                           |

| <b>Class Name / Tag Name</b>          | <b>Description</b>                        | <b>Notes</b>                                         |
|---------------------------------------|-------------------------------------------|------------------------------------------------------|
| .TMPopupSelector<br>.TMPopupMenuPopup | Container for popup selector menu pop-ups | New in 6.3<br>Modified in 6.3.7<br>Modified in 6.4.2 |
| .TMModalGlassPane                     | Glass pane for modal pop-ups              | New in 6.3<br>Modified in 6.3.4                      |
| .TMZOrderLayerContainer               | Z-Order container                         | New in 5.5 CU5<br>Modified in 6.3                    |
| .TMZOrderLayer                        | Z-Order layer                             | New in 5.5 CU5                                       |

## ***Dialog***

Dialog window (also used on the Results Page)

**Table 4-58: Dialog**

| <b>Class Name / Tag Name</b>     | <b>Description</b>           | <b>Notes</b>                    |
|----------------------------------|------------------------------|---------------------------------|
| .tm_dialog                       | Dialog container             | New in 6.0                      |
| .tm_dialog_main                  | Dialog main table            | New in 6.0                      |
| .tm_dialog_header-start          | Dialog header start (left)   | New in 6.0<br>Modified in 6.4.2 |
| .tm_dialog_header                | Dialog header content        | New in 6.0<br>Modified in 6.4.2 |
| .tm_dialog_header-end            | Dialog header end (right)    | New in 6.0<br>Modified in 6.4.2 |
| .tm_dialog_header-content-center | Dialog header content center | New in 6.0                      |
| .tm_dialog_title                 | Dialog title                 | New in 6.0<br>Modified in 6.4.2 |
| .tm_dialog_icon-region           | Dialog icon region           | New in 6.0                      |

| <b>Class Name / Tag Name</b>   | <b>Description</b>          | <b>Notes</b>                                                              |
|--------------------------------|-----------------------------|---------------------------------------------------------------------------|
| .tm_dialog_close-icon          | Dialog close icon           | New in 6.0                                                                |
| .tm_dialog_close-icon-style    | Dialog close icon           | New in 6.0<br>Modified in 6.4.2                                           |
| .tm_dialog_content-start       | Dialog content start (left) | New in 6.0<br>Modified in 6.4.2                                           |
| .tm_dialog_content             | Dialog main content         | New in 6.0<br>Modified in 6.4.2                                           |
| .tm_dialog_content-end         | Dialog end (right)          | New in 6.0<br>Modified in 6.4.2                                           |
| .tm_dialog_footer-start        | Dialog footer start (left)  | New in 6.0<br>Modified in 6.4.2                                           |
| .tm_dialog_footer              | Dialog footer               | New in 6.0<br>Modified in 6.4.2                                           |
| .tm_dialog_footer-end          | Dialog footer end (right)   | New in 6.0<br>Modified in 6.4.2                                           |
| .tm_dialog_footer-content      | Dialog footer content       | New in 6.0<br>Modified in 6.4.2                                           |
| .tm_dialog_footer-button       | Dialog footer button        | New in 6.0<br>Modified in 6.3.3<br>Modified in 6.3.4<br>Modified in 6.4.2 |
| .tm_dialog_inactive-background |                             | New in 6.0                                                                |
| .tm_dialog_resize_ghost        | Not implemented             | New in 6.3                                                                |

## ***Panel Window***

Panel Window

**Table 4-59: Panel Window**


| <b>Class Name / Tag Name</b>          | <b>Description</b>                 | <b>Notes</b>                    |
|---------------------------------------|------------------------------------|---------------------------------|
| .tm_panelWindow                       | Panel window container             | New in 6.3                      |
| .tm_panelWindow main                  | Panel window main table            | New in 6.3                      |
| .tm_panelWindow_header-start          | Panel window header start (left)   | New in 6.3<br>Modified in 6.4.2 |
| .tm_panelWindow_header                | Panel window header content        | New in 6.3<br>Modified in 6.4.2 |
| .tm_panelWindow_header-end            | Panel window header end (right)    | New in 6.3<br>Modified in 6.4.2 |
| .tm_panelWindow_header-content-center | Panel window header content center | New in 6.3                      |
| .tm_panelWindow_title                 | Panel window title                 | New in 6.3<br>Modified in 6.4.2 |
| .tm_panelWindow_icon-region           | Panel window icon region           | New in 6.3                      |
| .tm_panelWindow_close-icon-style      | Panel window close icon            | New in 6.3<br>Modified in 6.4.2 |
| .tm_panelWindow_content-start         | Panel window content start (left)  | New in 6.3<br>Modified in 6.4.2 |
| .tm_panelWindow_content               | Panel window main content          | New in 6.3<br>Modified in 6.4.2 |
| .tm_panelWindow_content-center        | Panel window content center        | New in 6.3                      |
| .tm_panelWindow_content-end           | Panel window end (right)           | New in 6.3<br>Modified in 6.4.2 |

| <b>Class Name / Tag Name</b>        | <b>Description</b>                              | <b>Notes</b>                    |
|-------------------------------------|-------------------------------------------------|---------------------------------|
| .tm_ panelWindow_footer-start       | Panel window footer start (left)                | New in 6.3<br>Modified in 6.4.2 |
| .tm_ panelWindow_footer             | Panel window footer                             | New in 6.3<br>Modified in 6.4.2 |
| .tm_ panelWindow_footer-end         | Panel window footer end (right)                 | New in 6.3<br>Modified in 6.4.2 |
| .tm_ panelWindow_footer-content     | Panel window footer content                     | New in 6.3                      |
| .tm_ panelWindow_footer-button      | Panel window footer button                      | New in 6.3                      |
| .tm_panelWindow_inactive-background |                                                 | New in 6.3                      |
| .tm_panelWindow_resize-icon-region  | Panel window resize icon region                 | New in 6.3                      |
| .tm_panelWondow_resize-icon-style   | Not implemented                                 | New in 6.3                      |
| .tm_panelWindow_resize-ghost        | Panel window class used while drag/drop, resize | New in 6.3                      |

## How to Find out which CSS Style Is Used


Today's browsers come with their own developer tools. The window can be invoked with the F12 key or by finding it within the browser's menu. From there you can use the selection tool to select an element on the page to see how the element is styled.

Example: On the Login page:

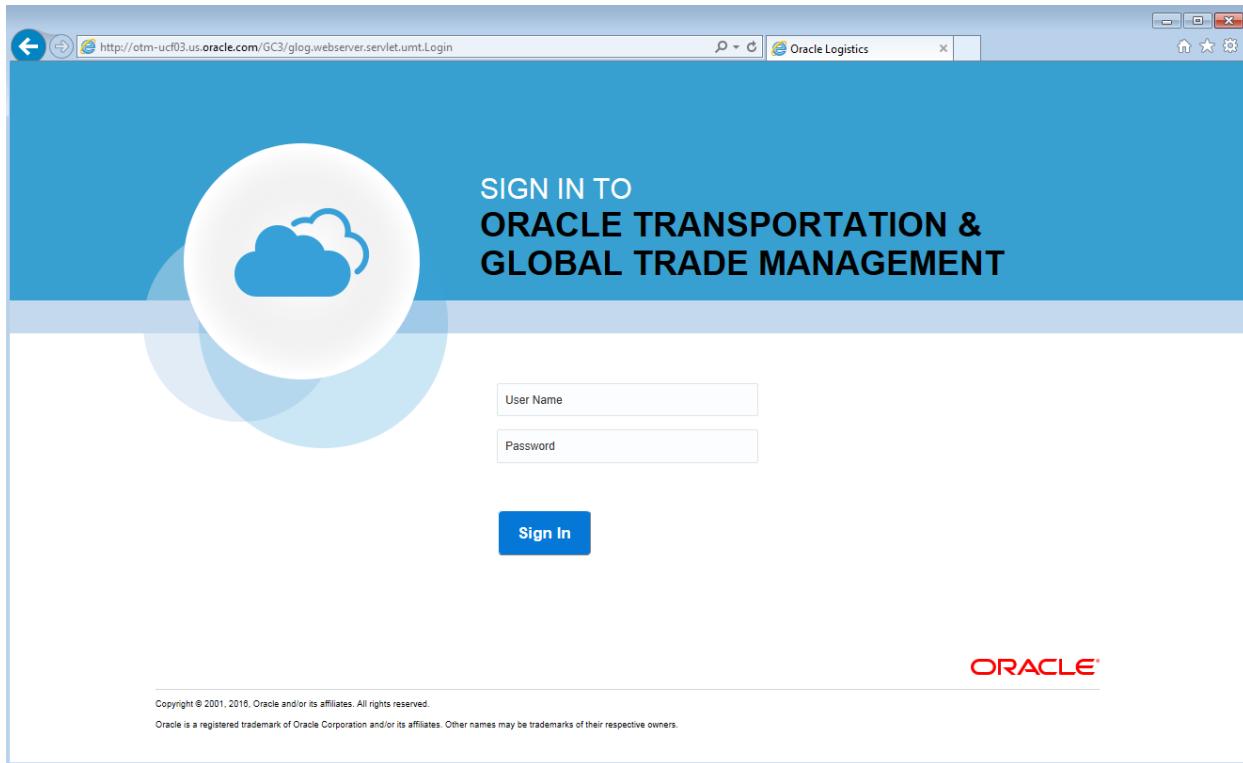

**Figure 4-2: Logon Page**

Open the developer tools window (F12) and select the copyright text.

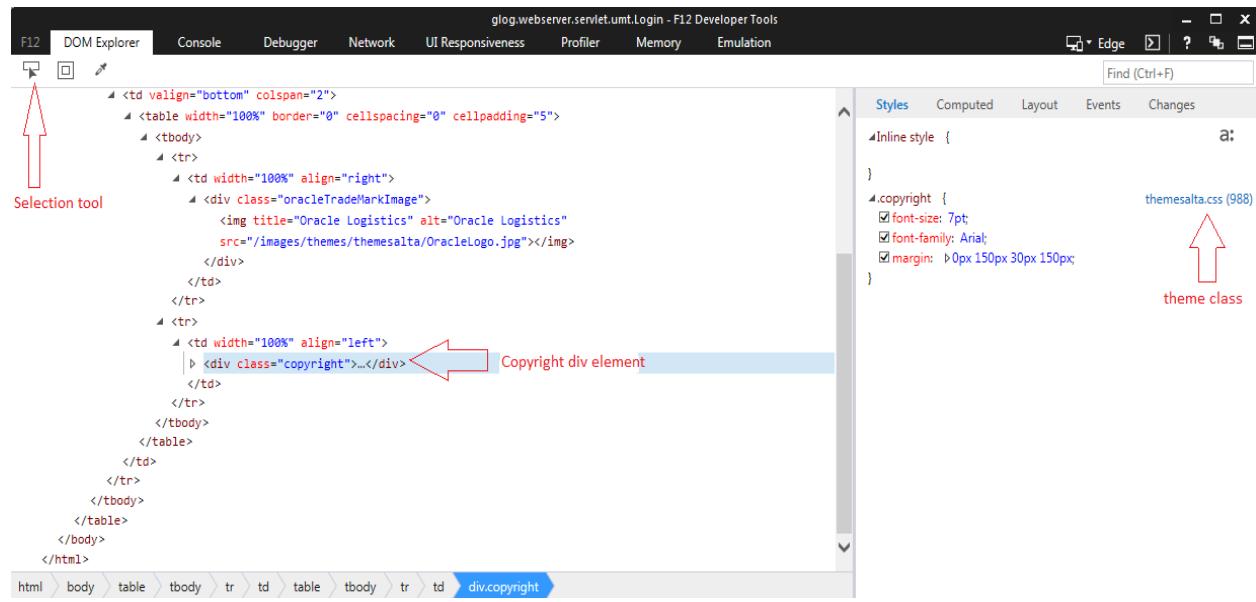

**Figure 4-3: Developer Tools**

This brings you to the `<td>` surrounding the text. Drill down one level and the first child is a span with a "copyright" class. This is a class that can be edited in the CSS file to make the copyright text appear as you wish.

## Unified Global Header Image and URL

The image and text in the upper, left-hand corner of the unified global header and URL behind it are defined by the following two xsl variables defined in the theme file:

- branding\_logo\_img: The image that appears next to the Navigator icon in the Unified Global Header.
- branding\_url: The URL used when you click the branding\_logo\_image.
- branding\_background\_color: The color used as the background color for the application shell. Enter a valid HTML color code.
- branding\_title: The text displayed next to the branding\_logo\_img.
- springboard\_background\_img: The image that appears behind the springboard.

You can update these variables in your theme file to use your own image and URL. See the [BRANDING AN XSL FILE](#) and [BRANDING AN IMAGE](#) sections for how to do this.



**Figure 4-4: Unified Global Header**

## 5. Branding Other Parts of Oracle Transportation Management

### Emails

All emails contain an Oracle Transportation Management logo. If all you want to do is change the logo that appears in all these emails, follow these steps:

1. Copy your new logo to the server where Oracle Transportation Management is installed under <otm\_install\_dir>/web/htdocs/images/<glog.customPath>/mail.
2. Open your glog.properties file or CUSTOM property set for editing.
3. Add the property glog.mail.logo.filename=<logoFileName.gif>.
4. Add the property glog.mail.logo.height=<height of image in pixels>. Oracle Transportation Management stretches your image to this height.
5. Add the property glog.mail.logo.width=<width of image in pixels>. Oracle Transportation Management stretches your image to this width.

**Note:** You might want to keep your new logo at the same or similar size as the original Oracle Transportation Management logo of 96 pixels wide x 62 pixels high.

Your changes take effect the next time you restart Oracle Transportation Management.

### Maps

Location icons on the map correspond to the location's role. Default icons are provided for each role. The icons associated to each role can be configured to use your own images.

**Note:** This is for non-Workbench maps only.

**Note:** Advanced Layout maps (non-Workbench) have been deprecated in release 6.4.3. They will be removed in a later version. Use Workbench maps instead.

In order to use your own image icons, follow these steps:

1. Copy your images to the server where Oracle Transportation Management is installed under <otm\_install\_dir>/web/htdocs/images/icons/<glog.customPath>/map\_icons.
2. Open your glog.properties file or CUSTOM property set for editing.
3. Each location role has a property pointing to the default icon image using the following format:

```
glog.map.style.icon.<LOCATION_ROLE>=<image_location_path>
e.g. glog.map.style.icon.WAREHOUSE=/images/icons/map_icons/BillTo.gif
```

4. Modify the icon image path to point to your images.

**Note:** You might want to keep your new logo at the same or similar size as the original Oracle Transportation Management logo of 24 pixels wide x 24 pixels high.

Your changes take effect the next time you restart Oracle Transportation Management.



## 6. User Interfaces

When logged into OTM as a user with DBA access, you can access the Branding pages (Configuration and Administration > Branding) explained below. See the online help for more details.

**Note for Cloud installations:** The Theme Management pages are the only way to configure the look and feel of OTM/GTM.

### ***Theme Management***

This page allows you to create and modify theme details for the standard user interface. Configurable details include images and URLs. Currently, the only variables that can be configured revolve around the logo.

### ***Upload Mail and User-Defined Images***

This page allows you to directly upload images used for emails and user-defined images.



## 7. Branding Fusion Transportation Intelligence

Fusion Transportation Intelligence (FTI) uses the add-on component of Oracle Business Intelligence Enterprise Edition (OBI EE). Additional branding is needed on the OBI EE side to get a similar look and feel as that of branded Oracle Transportation Management.

For branding OBI EE, users must consult the OBI EE manual.

**Note:** Oracle Transportation Management's Oracle branding is also OBI EE's default. If you stay with Oracle Transportation Management Oracle, no additional changes are needed on OBI EE.



## **8. Appendix A: Additional Resources**

### **XML Resources**

- WC3 XML Page (<http://www.w3.org/XML/>)
- XML.com (<http://www.xml.com>)
- The XML FAQ (<http://www.ucc.ie/xml/>)

### **XSL Resources**

- W3C XSL Page (<http://www.w3.org/Style/XSL/>)
- XSL (from XML files) (<http://www.xmlfiles.com/xsl/>)

### **CSS Resources**

- Cascading Style Sheets, Level 2 (<http://www.w3.org/TR/REC-CSS2>)
- Introduction to CSS2 (<http://www.w3.org/TR/REC-CSS2/intro.html>)
- CSS2 Reference (<http://www.w3schools.com/cssref/> )

