

FCIS Application Deployment in Websphere
Oracle FLEXCUBE Investor Servicing
Release 12.1.0.0.0
[October] [2015]



Table of Contents

- 1. FLEXCUBE UNIVERSAL BANKING SOLUTIONS 1-3
 - 1.1 FCIS APPLICATION FULL DEPLOYMENT 1-3
 - 1.2 FCIS APPLICATION PARTIAL DEPLOYMENT 1-1


1. FLEXCUBE Universal Banking Solutions

This document describes step to install FCIS application into weblogic server in full and partial deployment modes.

Please refer the document “FCIS_Manual_Deployment_WAS” for additional configuration which needs to be done after deployment.

1.1 FCIS Application Full Deployment

1. Launch Oracle FLEXCUBE Investor Servicing Installer.

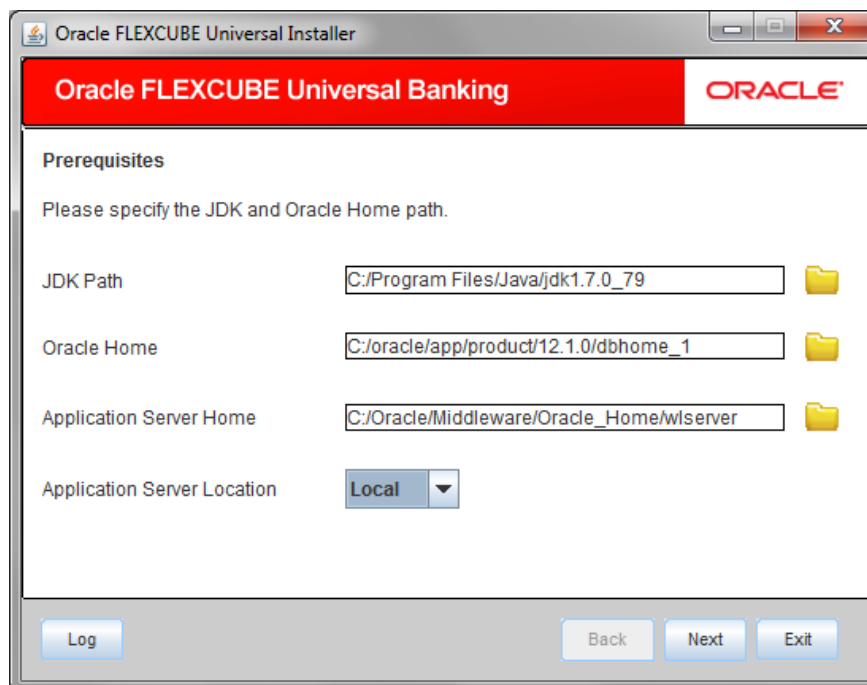

Enter the following details

JDK Path:

Provide Home folder path of JDK1.7

Oracle Home

Provide home folder path of Oracle Client or Database


Application Server Home

Provide home folder path of Application Server


Application Server Location

Select location of the application server either local or remote

2. Click on “Next” to display the screen below.

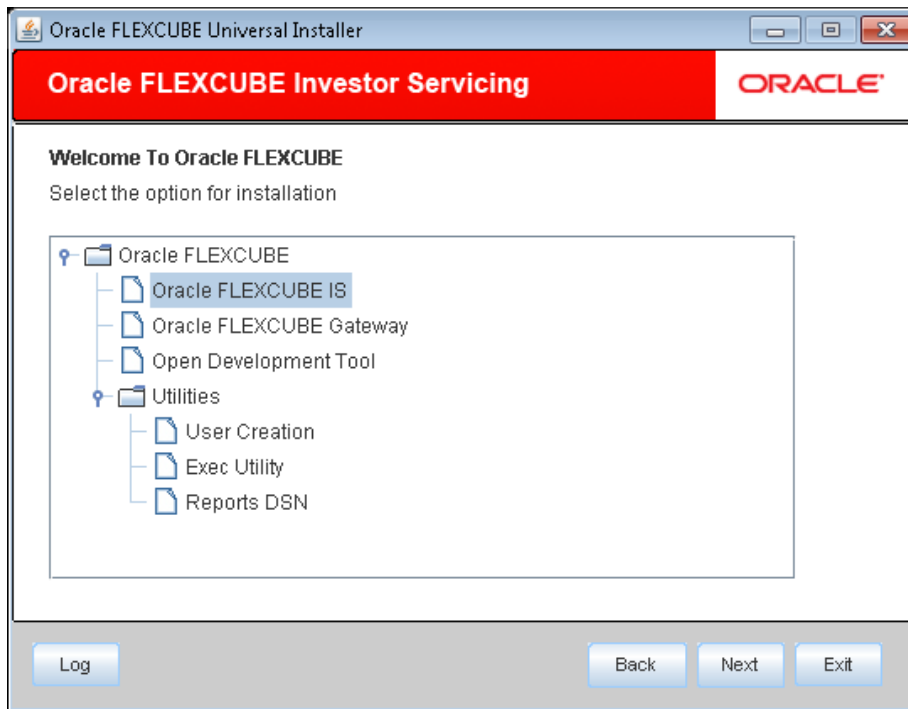

3. Select “Oracle FLEXCUBE IS”.
4. Click on “Next” to display the screen below.

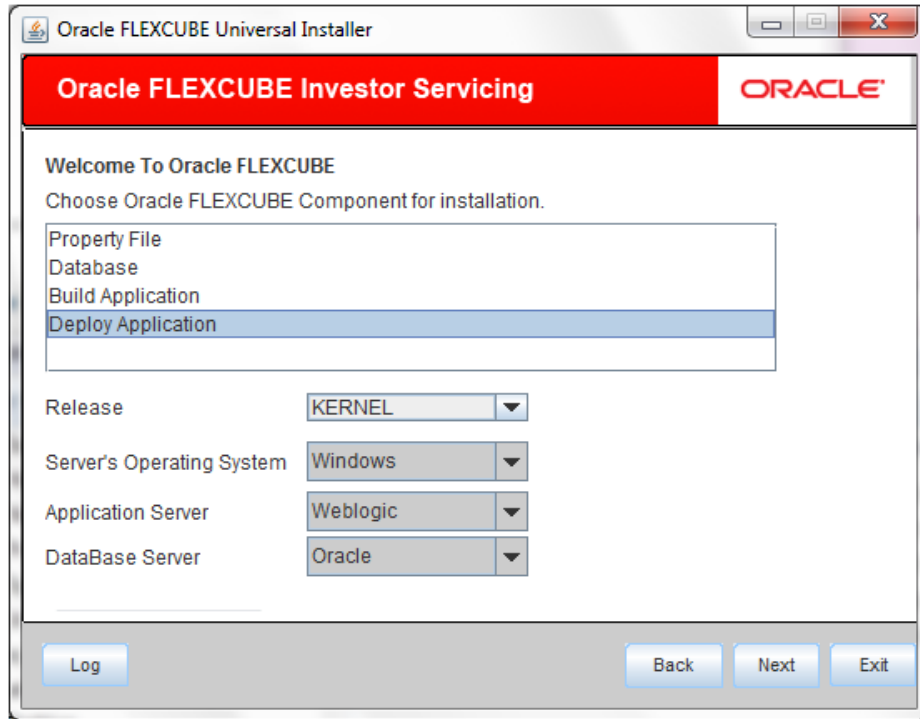

5. Select “Deploy Application”.

Choose the appropriate Server’s Operating System from the drop-down.

Choose “**Websphere**” from the Application Server drop down.

6. Click on “Next” to display the screen below.

Oracle FLEXCUBE Universal Installer

Oracle FLEXCUBE Investor Servicing **ORACLE**

Application Deployment
Provide server details for connecting to the server.

Name	Value
Admin IP	Not Applicable
Admin Port	Not Applicable
Admin Username	websphere
Admin Password

Test Connection

Type of Deployment: Full Deployment ▼

Log Back Next Exit

7. Provide the following details

Admin IP

Not applicable.

Admin Port

Not applicable.

Admin UserName

Please provide the appropriate Admin Username of the websphere application server.


Admin Password

Please provide the appropriate Admin Password of the websphere application server.


Type of Deployment

Choose "Full Deployment".

Click on "**Test Connection**" to test the connection with the application server. On successful connection, the following message will be displayed.

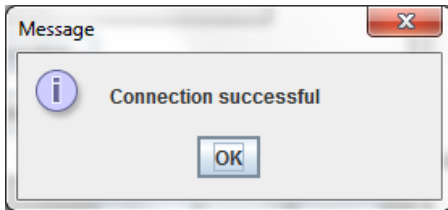

8. Click on “OK” and click on “Next” to display the screen below.

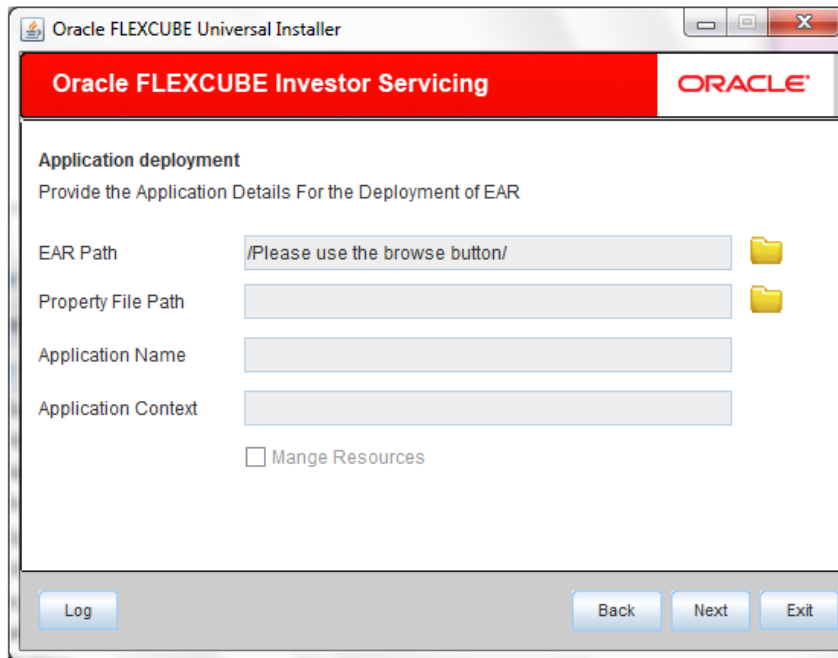

9. Provide the following details

EAR Path

Please select the application EAR to be deployed using the browse button.

Note: The Application EAR path cannot be copied and pasted on to the text box, thereby demanding the use of the browse button to the select the EAR.

Property File Path

Please select the appropriate path to the external properties file.

If the properties file is internal to the application EAR, it would be fetched on selection of the EAR and will be in a non-editable state.

Application Name

Application Name would be fetched on selection of the EAR and will be in a non-editable state.

Application Context

Application Context would be fetched on selection of the EAR and will be in a non-editable state.

Manage Resources

Not Applicable for websphere application server.

10. Click on “Next” to display the screen below.

Oracle FLEXCUBE Universal Installer

Oracle FLEXCUBE Investor Servicing ORACLE

Application deployment
Provide the Application Details For the Deployment of EAR

Application Name Get Details

Status

Cell Name

Node Name

Target Type

Server Name

Cluster Name

Log Back Next Exit

11. Provide the following details

Application Name

Not applicable for application full deployment.

Status

Not applicable for application full deployment.

Cell Name

Please provide the appropriate Cell Name.

Node Name

Please provide the appropriate Node Name.

Target Type

Please choose the appropriate target type.

Server Name


Please provide the appropriate Server Name if the selected Target Type is “**Server**”.

Cluster Name

Please provide the appropriate Cluster Name if the selected Target Type is “**Cluster**”.


Note: The values fed in the above screen are not validated at the screen level as a result of a limitation and hence, please provide accurate information.


12. Click on “Next” to display the screen below.

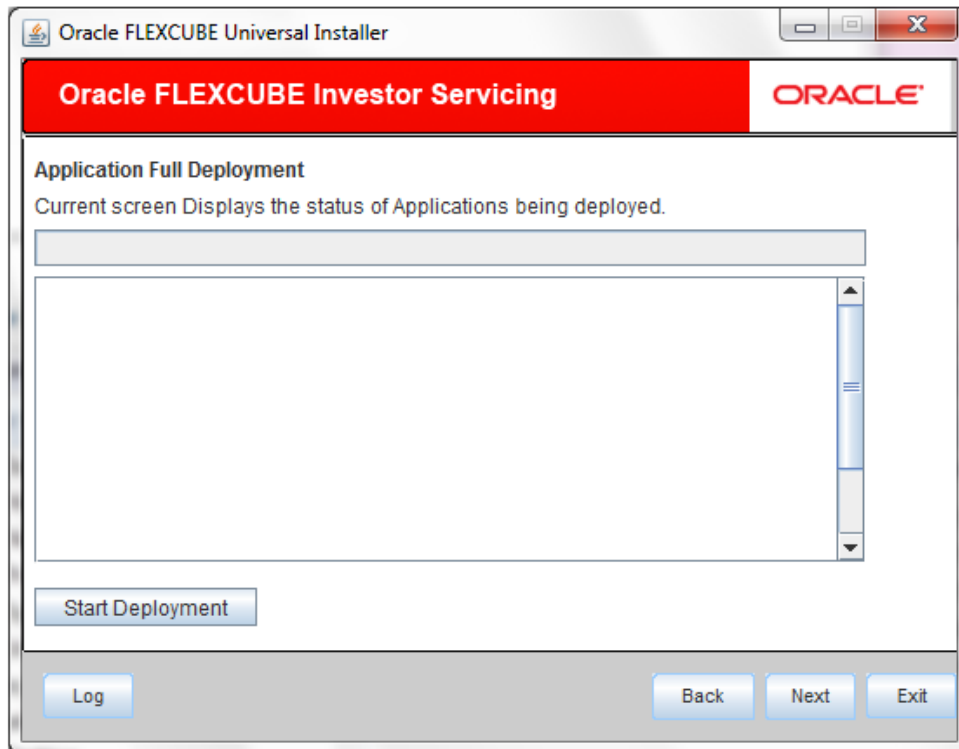


13. Click on “**Start Deployment**” to begin the process of application deployment.

14. On successful deployment, you will get the following message and the screen is expected to look like below.

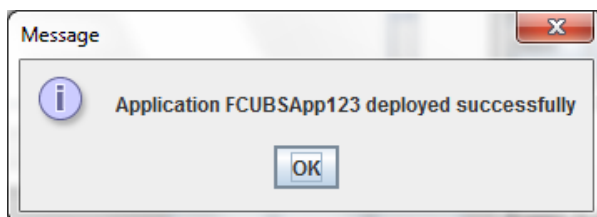

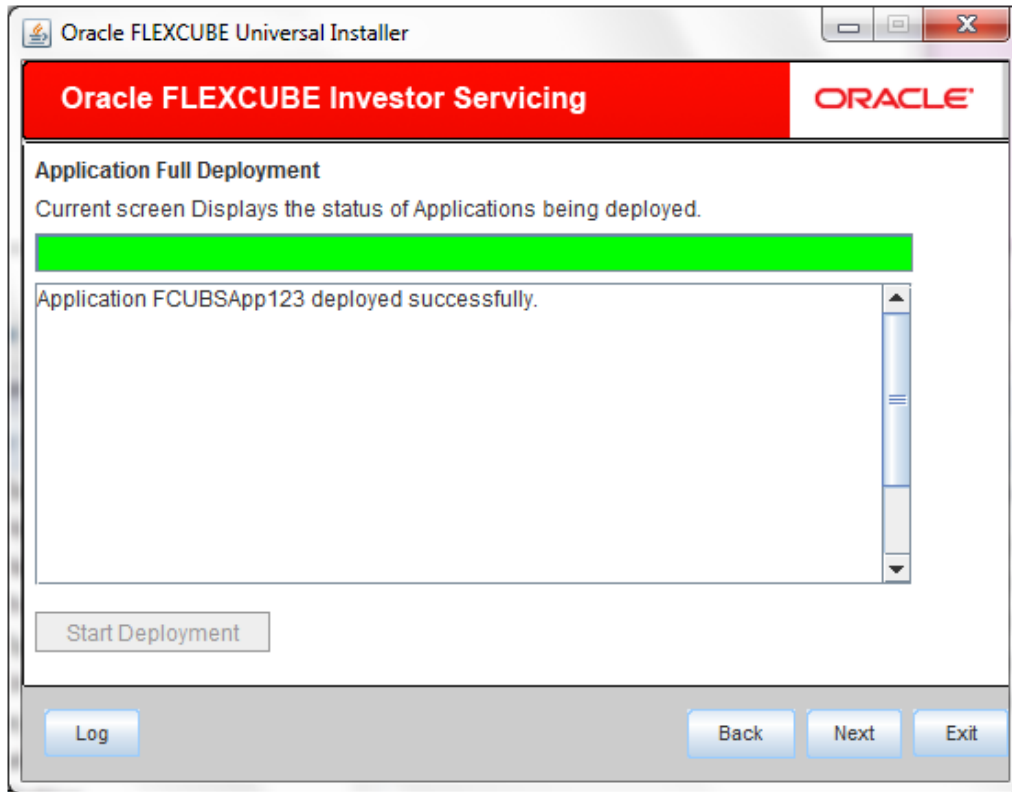


If the deployment is not successful, the 'Undeploy' button will be enabled.

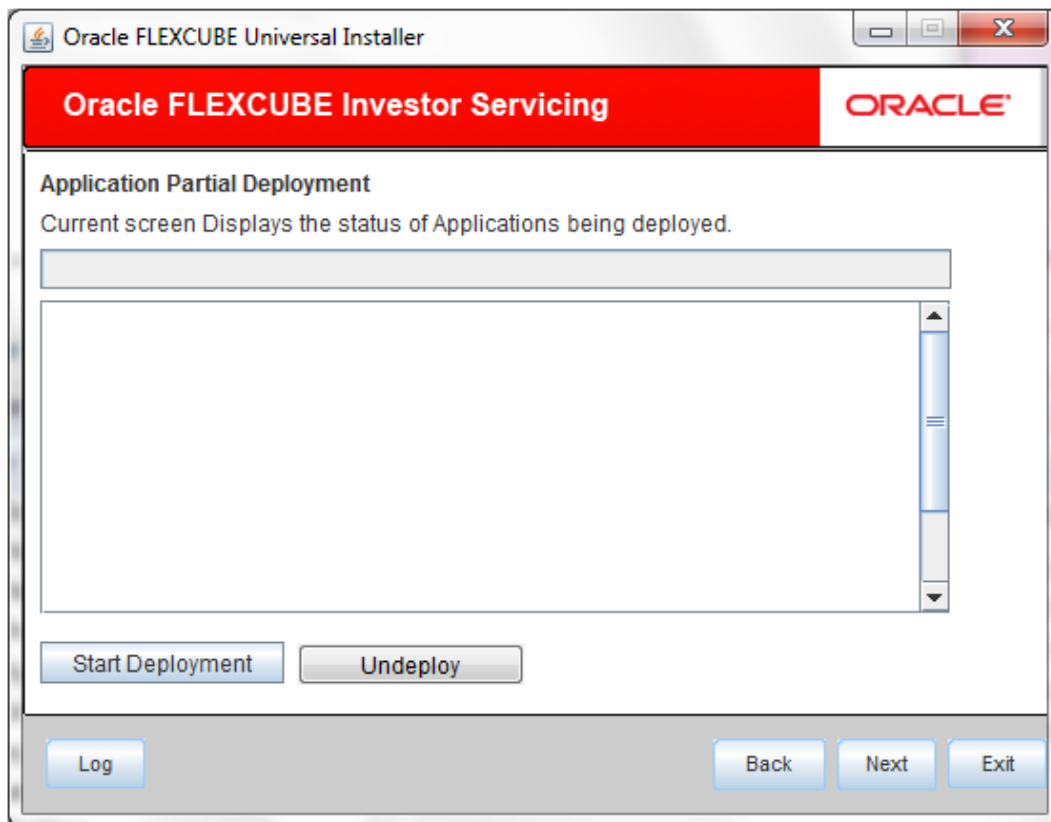


15. Click 'Undeploy' for undeploying the partially deployed EAR from the server.

1.2 FCIS Application Partial Deployment

1. Launch Oracle FLEXCUBE Investor Servicing Installer.
2. Click on “Next” to display the screen below.

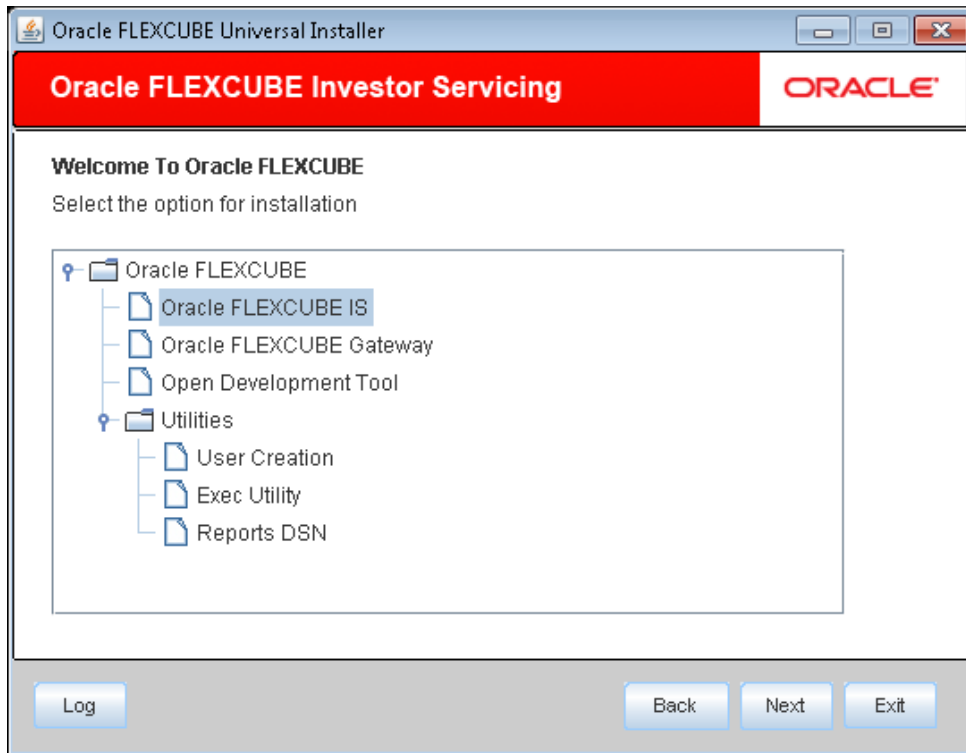

3. Select “Universal Banking Solution”.
4. Click on “Next” to display the screen below.

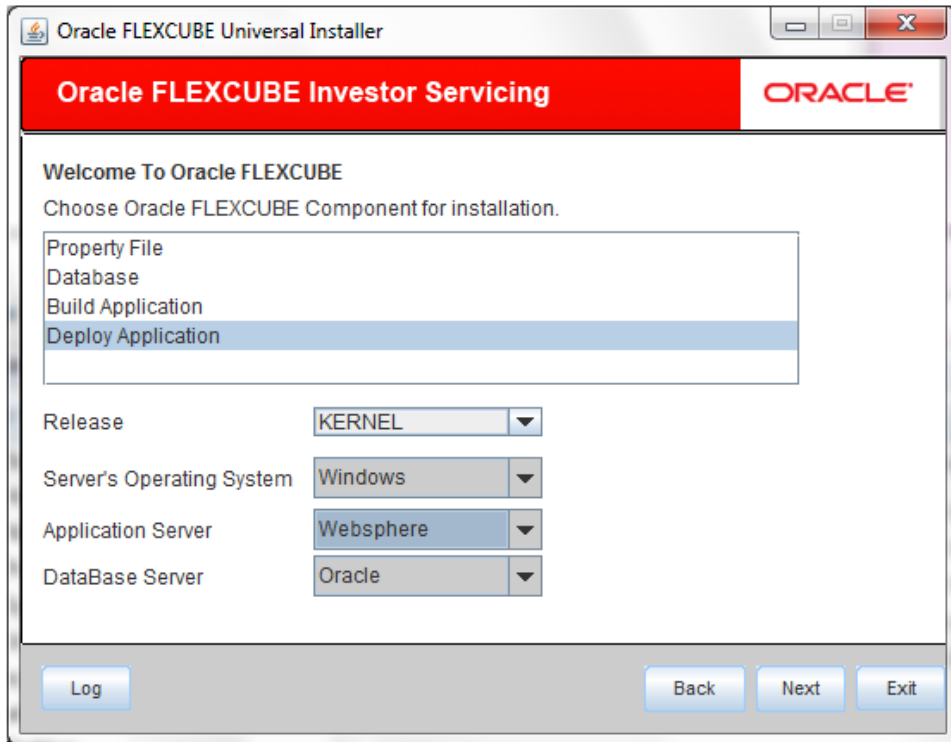

5. Select "Deploy Application".
6. Choose the appropriate Server's Operating System from the drop down.
7. Choose "Websphere" from the Application Server drop down.
8. Click on "Next" to display the screen below.

Name	Value
Admin IP	Not Applicable
Admin Port	Not Applicable
Admin Username	websphere
Admin Password

Type of Deployment: Full Deployment ▼

9. Provide the following details

Admin IP

Not applicable.

Admin Port

Not applicable.

Admin UserName

Please provide the appropriate Admin Username of the websphere application server.


Admin Password

Please provide the appropriate Admin Password of the websphere application server.


Type of Deployment

Choose "Partial Deployment".

10. Click on "**Test Connection**" to test the connection with the application server. On successful connection, the following message will be displayed.

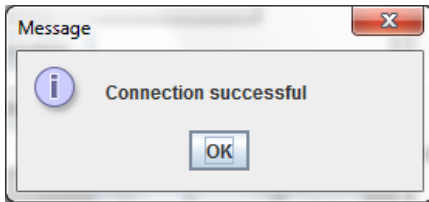

11. Click on “OK” and click on “Next” to display the screen below.

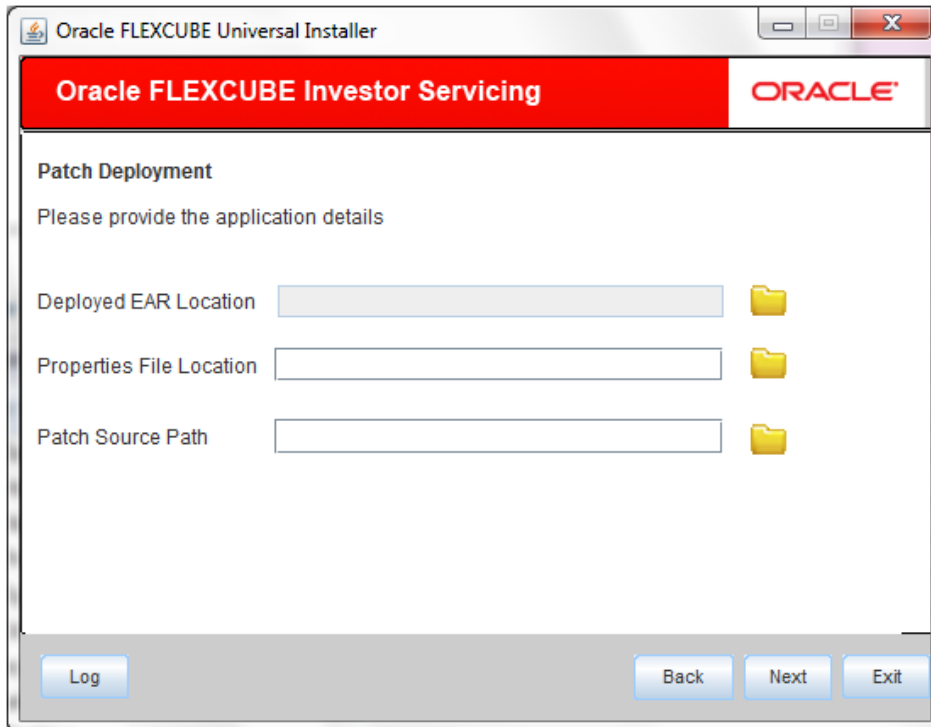

12. Provide the following details

Deployed EAR Location

Please provide a valid deployed EAR location of the application that is to be patched.

Ex. (LINUX) - /IBM/WebSphere/AppServer/profiles/AppSrv01/installedApps/xxxxx-PCNode01Cell/FCUBSApp.ear

Ex. (WINDOWS) - D:\IBM\WebSphere\AppServer\profiles\AppSrv01\installedApps\xxxxx-PCNode01Cell\FCUBSApp.ear

Property File Path

Please select the appropriate path to the external properties file.

If the properties file is internal to the application EAR, it would be fetched on selection of the EAR and will be in a non-editable state.

Patch Source Path

Please provide a valid patch source path.

13. Click on “Next” to display the screen below.

The screenshot shows the 'Oracle FLEXCUBE Universal Installer' window. The title bar includes the Oracle logo and the text 'Oracle FLEXCUBE Universal Installer'. The main window has a red header bar with 'Oracle FLEXCUBE Investor Servicing' and the 'ORACLE' logo. Below the header, the section is titled 'Application deployment' with the instruction 'Provide the Application Details For the Deployment of EAR'. The form contains several input fields: 'Application Name' (a dropdown menu), 'Status', 'Cell Name', 'Node Name', 'Target Type' (a dropdown menu with 'Server' selected), 'Server Name', and 'Cluster Name'. A 'Get Details' button is located to the right of the 'Application Name' field. At the bottom of the window, there are four buttons: 'Log', 'Back', 'Next', and 'Exit'.

Get Details

Please click on “Get Details” to list all the applications deployed on websphere application server.

NOTE: The Installer would take 10-15 seconds of processing time to fetch the details.

Application Name

Please select the application to be patched from the drop down.

NOTE: The Installer would take 7-10 seconds of processing time to fetch the Status, Cell Name and Node Name on selection of the Application Name

Status

Non-Editable field. Status would be displayed on selection of the Application Name.

Cell Name

Non-Editable field. Cell Name would be displayed on selection of the Application Name provided the application is UP.

Node Name

Non-Editable field. Node Name would be displayed on selection of the Application Name provided the application is UP.

Target Type

Not applicable for Application Partial Deployment.


Server Name

Not applicable for Application Partial Deployment.

Cluster Name


Not applicable for Application Partial Deployment.


14. Click on “Next” to display the screen below.

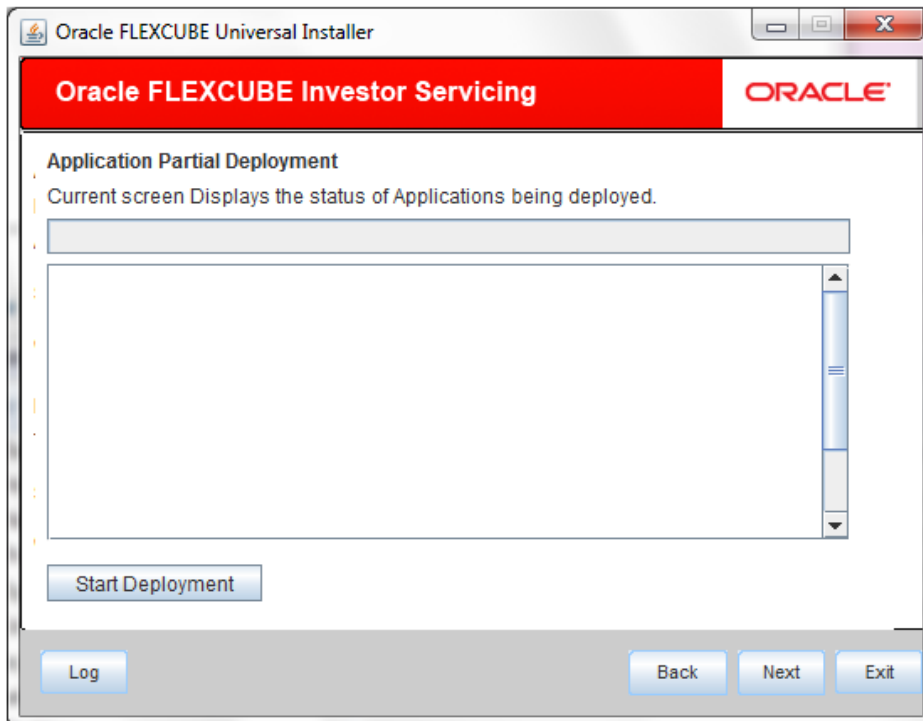

15. Click on “**Start Deployment**” to start the partial/patch deployment.

On successful partial deployment, the following message would be displayed and the screen would like below.

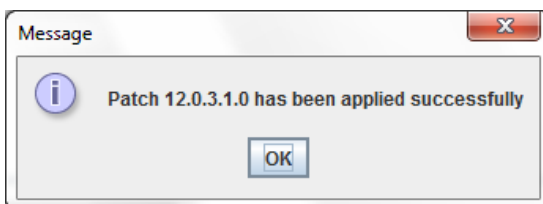

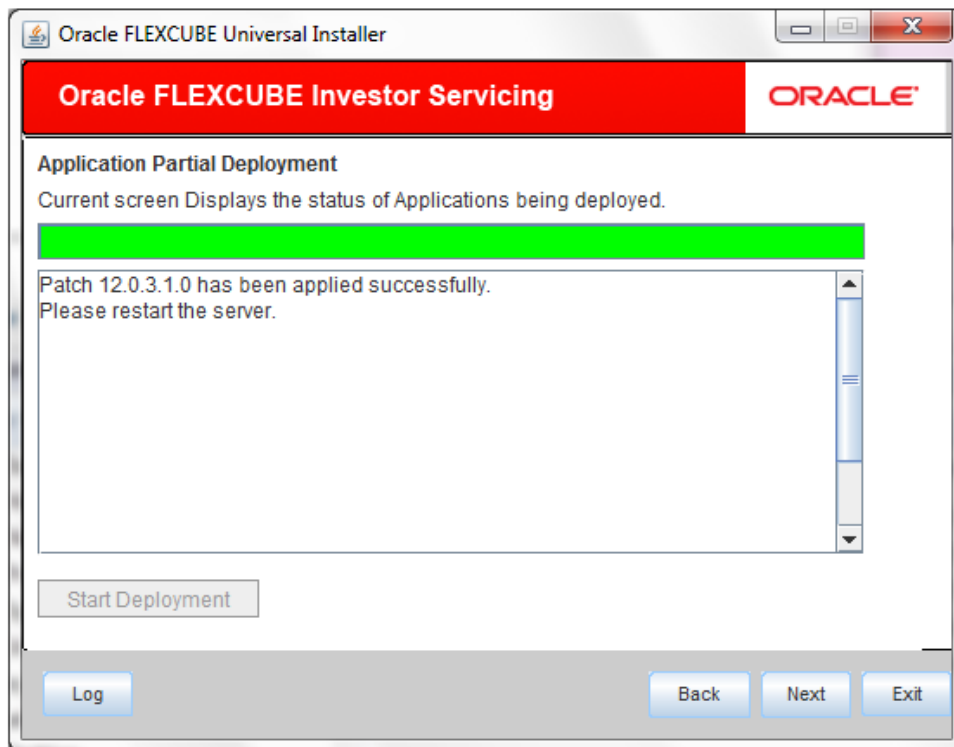

16. Please restart the server for changes pertaining to the deployed patch to reflect.



FCIS Application Deployment Websphere
[October] [2015]
Version 12.1.0.0.0

Oracle Financial Services Software Limited
Oracle Park
Off Western Express Highway
Goregaon (East)
Mumbai, Maharashtra 400 063
India

Worldwide Inquiries:
Phone: +91 22 6718 3000
Fax: +91 22 6718 3001
www.oracle.com/financialservices/

Copyright © [2007], [2015], Oracle and/or its affiliates. All rights reserved.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate failsafe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

This software or hardware and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

