

Installation and Setup Guide
Oracle FLEXCUBE Investor Servicing
Release 12.1.0.0.0
[October] [2015]



Table of Contents

1. PREFACE	1-1
1.1 AUDIENCE	1-1
1.2 RELATED DOCUMENTS.....	1-1
1.3 CONVENTIONS	1-1
2. INTRODUCTION	2-1
2.1 HOW TO USE THIS GUIDE	2-1
3. PRE-REQUISITES	3-1
3.1 JDK.....	3-1
3.1.1 License Information	3-1
3.1.2 Instructions	3-1
3.2 APACHE ANT 1.7.1	3-1
3.2.1 License Information	3-1
3.2.2 Download Instructions.....	3-1
3.2.3 Post Download Instructions.....	3-1
3.3 ACTIVE X SETTINGS:	3-1
3.4 MSXML:.....	3-1
3.5 ORACLE CLIENT (DATABASE INSTALLATION)	3-1
3.6 SWING LAYOUT	3-2
3.6.1 License Information	3-2
3.6.2 Download Instructions.....	3-2
3.6.3 Post Download Instructions.....	3-2
3.7 LOG4J 1.2.15.....	3-2
3.7.1 License Information	3-2
3.7.2 Download Instructions.....	3-2
3.7.3 Post Download Instructions.....	3-2
3.8 ORACLE 11G DATABASE DRIVER (11.1.0.7) (DATABASE INSTALLATION)	3-2
3.8.1 License Information	3-2
3.8.2 Download Instructions:	3-3
3.9 SETUP FOR INSTALLER OPEN DEVELOPMENT APPLICATIONS	3-3
3.9.1 Step1	3-3
3.9.2 Step2	3-3
3.9.3 Step 3	3-4
3.9.4 Step 4	3-5
3.9.5 Step 5	3-6
4. OPEN DEVELOPMENT TOOL 11.1 INSTALLATION	4-1
4.1 WAR FILE GENERATION.....	4-1
4.1.1 Step 1	4-1
4.1.2 Step 2	4-1
4.1.3 Step 3	4-1
4.1.4 Step 4	4-2
5. HOW TO RUN INSTALLER.....	5-1
6. TROUBLESHOOTING.....	6-1
6.1 CHECKING LOGS.....	6-1
7. DEPLOYMENT OF WAR FILE TO APPLICATION SERVER.....	7-1
7.1 APACHE TOMCAT 5.5 SERVER	7-1

7.1.1	Step 1	7-1
7.1.2	Step 2	7-1
7.1.3	Step 3	7-2
7.1.4	Step 4	7-3
7.1.5	Step 5	7-4
7.1.6	Step 6	7-5
7.2	OC4J APPLICATION SERVER	7-5
7.2.1	Step 1	7-6
7.2.2	Step 2	7-7
7.2.3	Step 3	7-8
7.2.4	Step 4	7-9
7.2.5	Step 5	7-10
7.2.6	Step 6	7-11
7.2.7	Step 7	7-12
7.2.8	Step 8	7-13
7.2.9	Step 9	7-14
7.2.10	Step 10	7-14
7.2.11	Step 11	7-15
7.2.12	Step 12	7-15
7.2.13	Step 13	7-18
7.2.14	Step 14	7-18
7.2.15	Step 15	7-19
7.2.16	Step 16	7-20
7.2.17	Step 17	7-21
7.2.18	Step 18	7-22
7.2.19	Step 19	7-23
7.2.20	Step 20	7-24
7.3	WEBLOGIC APPLICATION SERVER	7-24
7.3.1	Step 1	7-26
7.3.2	Step 2	7-27
7.3.3	Step 3	7-28
7.3.4	Step 4	7-29
7.3.5	Step 5	7-29
7.3.6	Step 6	7-30
7.3.7	Step 7	7-31
7.3.8	Step 8	7-32
7.3.9	Step 9	7-33
7.3.10	Step 10	7-34
7.3.11	Step 11	7-35
7.3.12	Step 12	7-36
7.3.13	Step 13	7-37
7.3.14	Step 14	7-38
7.3.15	Step 15	7-39
7.3.16	Step 16	7-40
7.3.17	Step 17	7-41
7.3.18	Step 18	7-42
8.	IE SETTINGS	8-1
9.	ADMINISTRATION	9-1
9.1	USER ROLES	9-1
9.1.1	System Administrator	9-1
9.1.2	Release Administrator	9-1
9.1.3	Developer	9-1
9.2	RELEASE DEFINITION	9-2
9.3	ENVIRONMENT CREATION	9-4
9.3.1	User Definition	9-5

10.	DEVELOPER CHECK LIST	10-1
------------	-----------------------------------	-------------

1. Preface

This document provides the steps to install extensible Open Development tool and initial administration activities.

1.1 Audience

This document is intended for FLEXCUBE IS Application developers who are required to the following:

- Install and setup Open Development Tool development environment

1.2 Related documents

For more information, see following documents.

- Development Overview Guide.docx
- Getting Started.docx
- Reference.docx

1.3 Conventions

The following text conventions are used in this document:

Convention Meaning

boldface	Boldface type indicates graphical user interface elements (for example, menus and menu items, buttons, tabs, dialog controls), including options that you select.
<i>italic</i>	italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
monospace	Monospace type indicates language and syntax elements, directory and File name, URLs, text that appears on the screen, or text that you enter.
	Indicates important information

2. Introduction

This document is a guide for installation of Open Development Tool Version 11.1. Detailed steps have been mentioned for generation of WAR file from the Open Development Tool Source and deployment of Open Development Tool application to Apache Tomcat and OC4J server.

2.1 How to Use This Guide

The information in this guide includes:

- [Chapter 2, "Introduction"](#)
- [Chapter 3, "Pre-requisites"](#)
- [Chapter 4, "Open Development Tool 11.1 installation"](#)
- [Chapter 5, "How to run Installer"](#)
- [Chapter 6, "Troubleshooting"](#)
- [Chapter 7, "How to deploy WAR file"](#)
- [Chapter 8, "IE settings"](#)
- [Chapter 9, "Administration"](#)
- [Chapter 10, "Developer check list"](#)

3. Pre-requisites

3.1 JDK

3.1.1 License Information

JDK is distributed by Sun Microsystems, Inc under Java Development Kit Binary Code License Agreement.

3.1.2 Instructions

Installer requires JDK 1.6 update 16 version to be downloaded in the system and the same should be set as environmental variable (explained later in this document).

3.2 Apache Ant 1.7.1

3.2.1 License Information

Apache License version 2.0. This is available for reference at <http://www.apache.org/licenses/LICENSE-2.0>

3.2.2 Download Instructions

Apache Ant 1.7.1 is available in the archives at <http://www.apache.org/dist/ant/binaries/>
The file to be downloaded is **apache-ant-1.7.1-bin.zip**.

3.2.3 Post Download Instructions

Extract the apache-ant-1.7.1-bin.zip distribution to a directory. And provide this path for setting the environmental variable which is explained later in this document.

3.3 ActiveX settings:

Tools -> Internet Options -> Security -> Local intranet -> Custom Level -> ActiveX controls and Plug-ins -> Initialize and script ActiveX controls not marked as safe -> Select Enable.

3.4 Msxml:

Msxml 4.0 to be available on client machine.

3.5 Oracle Client (Database Installation)

In order to carry out Database Installation, Installer requires **Oracle 11g Client** or later version to be installed in the system.

3.6 Swing Layout

3.6.1 License Information

Lesser General Public License (LGPL 2.1)

3.6.2 Download Instructions

Swing Layout is available in the archives at <https://swing-layout.dev.java.net/> . In the website under 'project tools' section, select 'Documents and files' section. The file to be downloaded is **swing-layout-1.0.jar**.

3.6.3 Post Download Instructions

Extract the Swing-layout-1.0 distribution to a directory. Copy the following file

swing-layout-1.0.jar

Into the directory {INSTALLER_DIR}\lib

3.7 Log4J 1.2.15

3.7.1 License Information

Apache License 2.0. This is available for reference at <http://www.apache.org/licenses/LICENSE-2.0>

3.7.2 Download Instructions

Log4j 1.2.15 is available in the archives at <http://archive.apache.org/dist/logging/log4j/1.2.15/> .The file to be downloaded is **apache-log4j-1.2.15.zip**.

3.7.3 Post Download Instructions

Extract the Log4j 1.2.15 distribution to a directory. Copy the following file

log4j-1.2.15.jar

Into the directory {INSTALLER_DIR}\lib

3.8 Oracle 11g Database Driver (11.1.0.7) (Database Installation)

3.8.1 License Information

Oracle Corporation

3.8.2 Download Instructions:

ojdbc6.jar is available in the archives at

http://www.oracle.com/technology/software/tech/java/sqlj_jdbc/htdocs/jdbc_111060.html

The file to be downloaded is **ojdbc6.jar**.

Post Download Instructions:

Extract the ojdbc6.jar distribution to a directory. Copy the following file

ojdbc6.jar

Into the directory {INSTALLER_DIR}\lib


3.9 Setup for installer Open Development Applications

3.9.1 Step1

Navigate to Control Panel


3.9.2 Step2

Double Click System icon to launch System Properties screen as shown below.

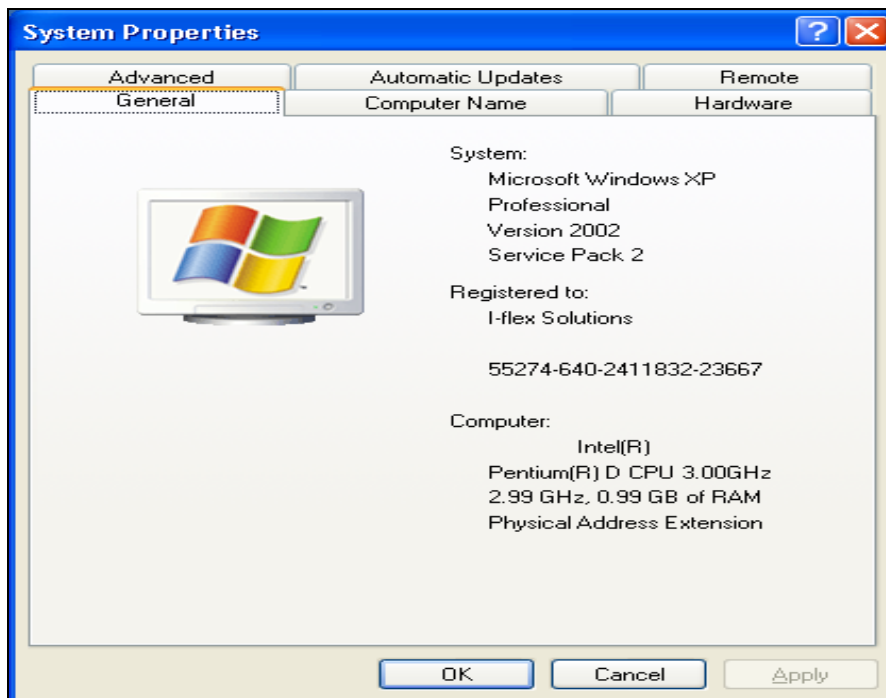



3.9.3 Step 3

Click Advanced Tab button and then click Environment Variables as shown below.

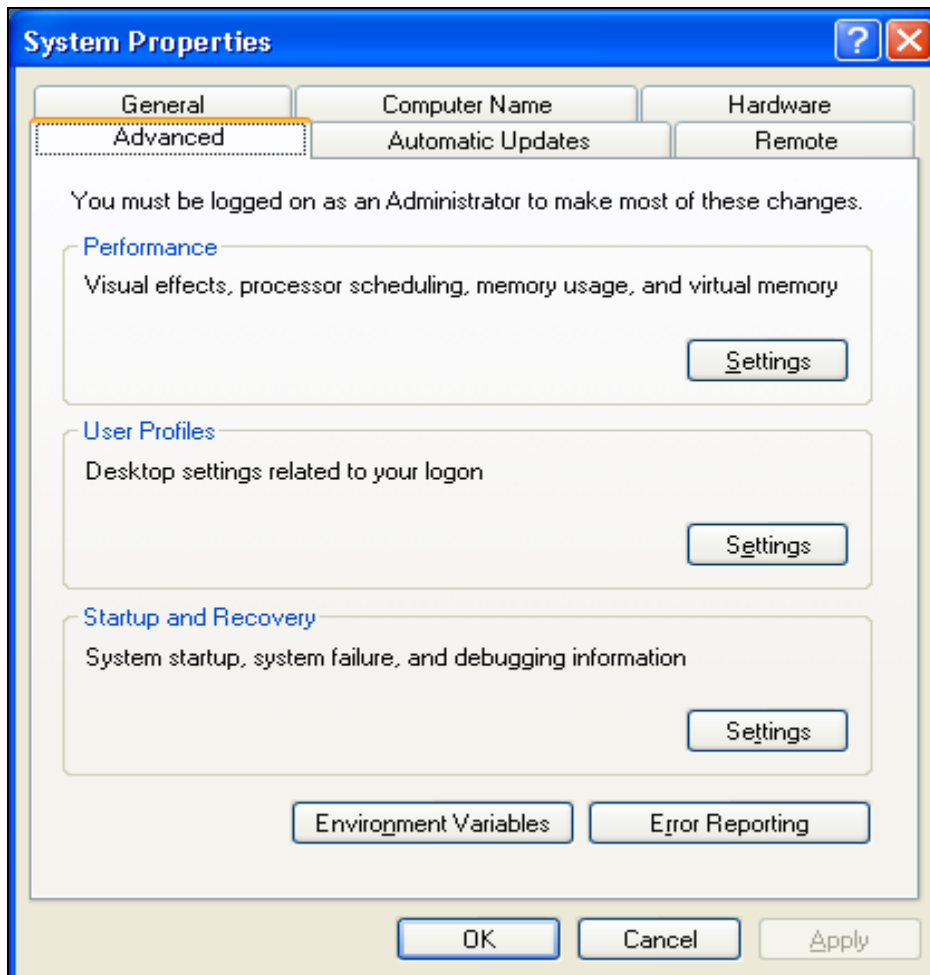

3.9.4 Step 4



In User variables click New and in Variable name type **RAD_ANT_HOME**. In the value field give the path of Apache Ant root directory as shown below.

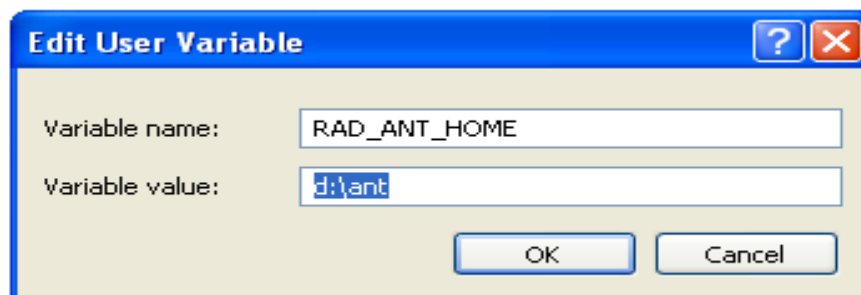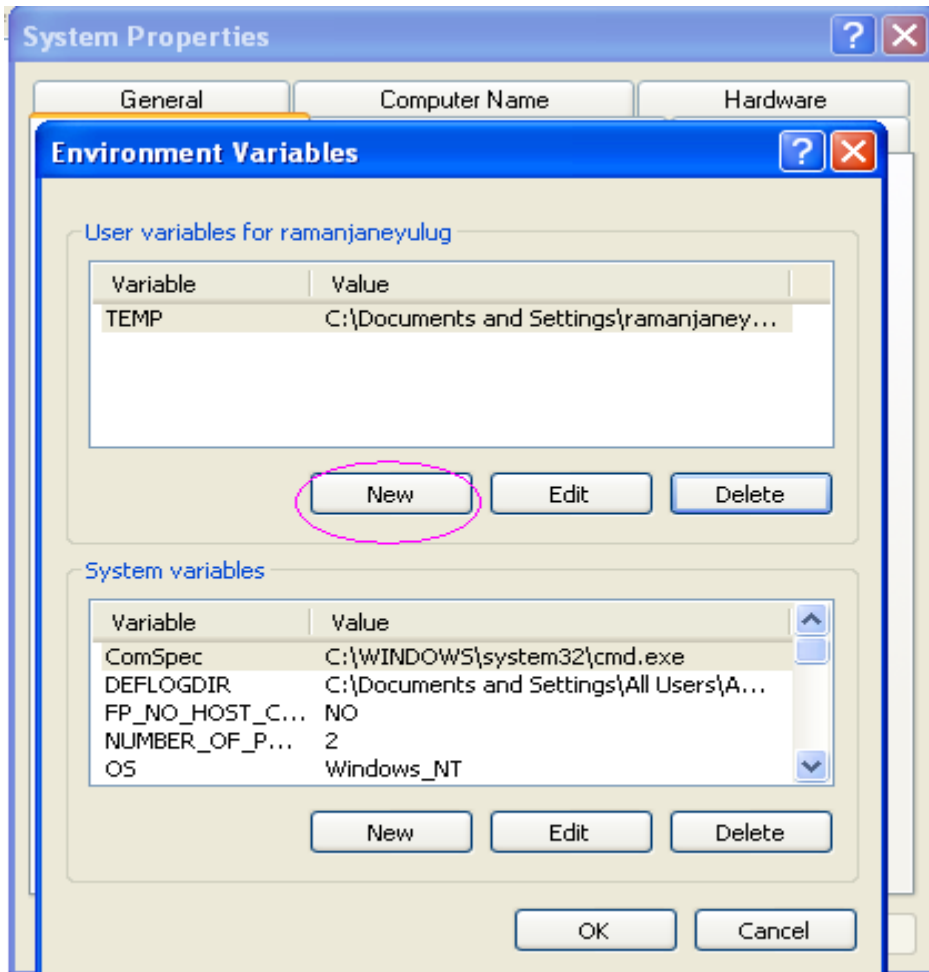

 The Ant provider supported by Installer is Apache and the version should be 1.7.1.

3.9.5 Step 5

Repeat **Step 4** and **Step 5** to set **RAD_JAVA_HOME** environment variable to jdk directory as shown below.

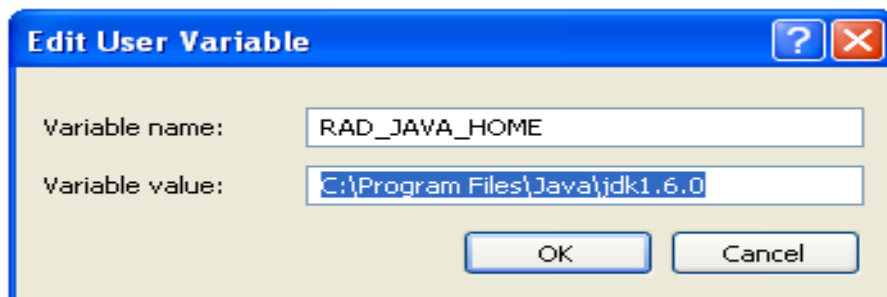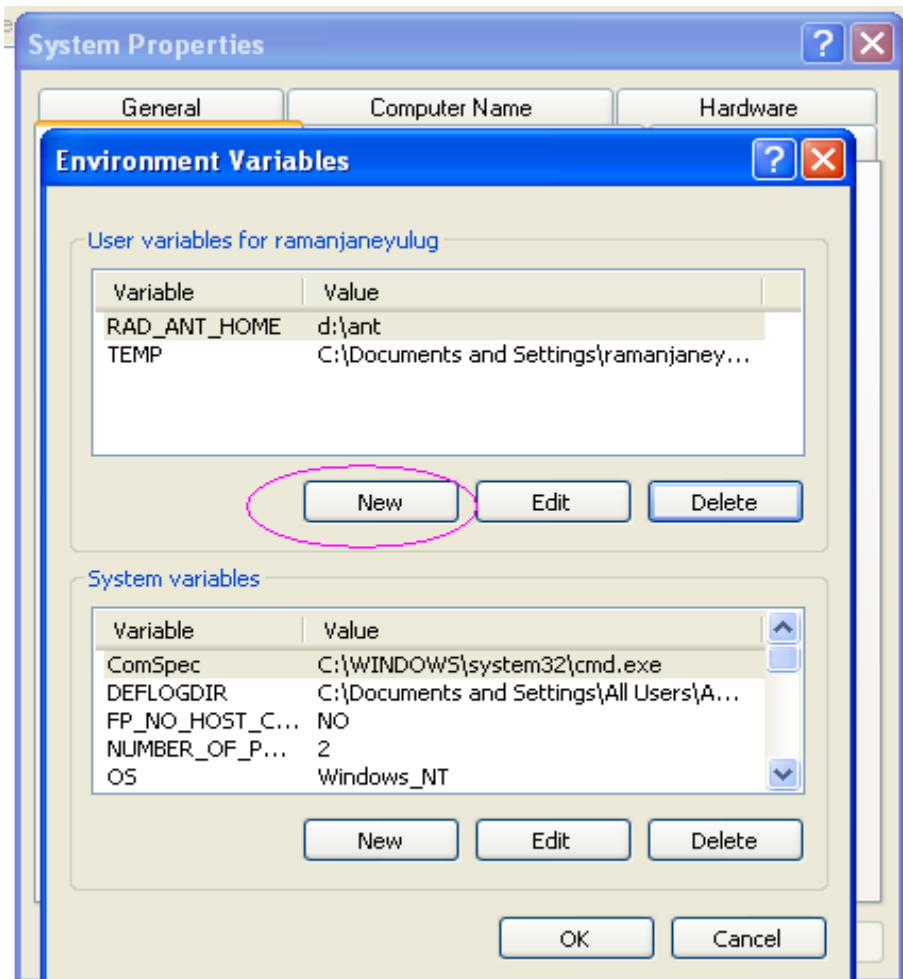

Ensure that the Variable value for Variable name RAD_JAVA_HOME eliminates space

4. Open Development Tool 11.1 Installation

Open Development Tool 11.1 installation includes below mentioned activities

- Deployment of Front-end Units or WAR File to Apache Tomcat or OC4J Server
- Loading of Back-end units(PLSQL Packages) to an existing FCUBS schema in Oracle Database
- RADTool.properties file configuration

The next section explains these two activities in detail

4.1 WAR File generation

To generate WAR file follow the below mentioned steps

4.1.1 Step 1


Copy all the contents from [\\IFLBLW-BPD-12\Vercon_IP-BPD-01\SOFT\FLEXCUBE_Kernel\FC_IS_V.UM_11.1.0.0.0.0\TOOLS\RAD\SOURCE\](#)

To RADTool_11.1

4.1.2 Step 2

RADTool. Properties file configuration

Open RADTool.properties file from **RADTool_11.1** folder. Refer the screen shot shown below and enter appropriate values

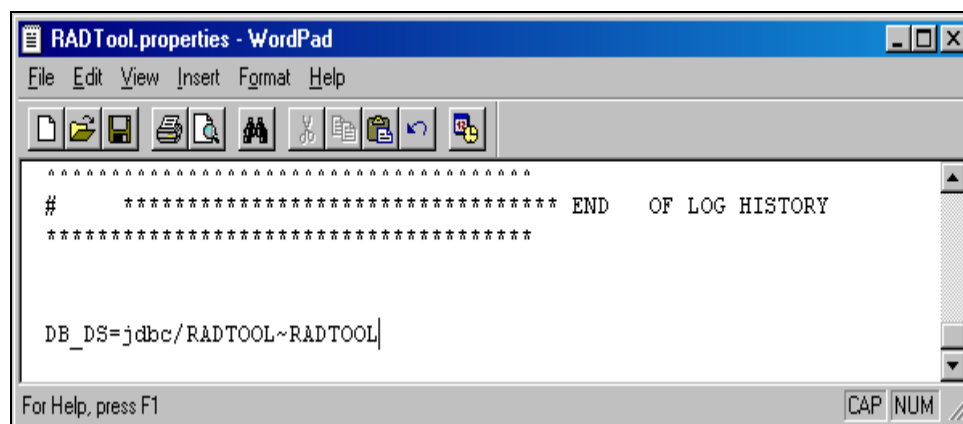

4.1.3 Step 3

Open Web.xml add the JNDI reference for backend Database.

Ex: **<resource-ref>**

<res-auth>Container</res-auth>

<res-ref-name>jdbc/RADTOOL</res-ref-name>

<res-type>javax.sql.DataSource</res-type>

</resource-ref>

4.1.4 Step 4

Please Use the Installer To Prepare Warfile.

Installer sources will be available in the following location.

\\IFLBLW-BPD-12\Vercon_IP-BPD-01\SOFT\FLEXCUBE_Kernel\FC_IS_V.UM_11.1.0.0.0.0\TOOLS\RAD\INSTALLER\SOURCE

5. How to Run Installer

After copying the installer sources and library folder to your local system, make sure you uncheck the read only check box in source properties and apply the same to all the sub folders.

The screen shot below shows how the source folder in your local system should look like.


To run the installer, double click the batch file (RADInstaller11.1.bat) present in the installer source.




RADInstaller11.1.bat

This displays the screen as follows.

A screenshot of the Oracle FLEXCUBE Management Integration Console window. The window has a blue title bar with the text "Oracle FLEXCUBE Management Integration Console". The main area is light blue and contains the Oracle logo and the title "FLEXCUBE Management and Integration Console". Under the heading "SCHEMA DETAILS", there are several input fields: "Schema", "Password", "Connect String", "IP Address", "SID/Service Name", and "Port". Below these is a "Rad Source Path" field with a "Browse" button. At the bottom, there are "Back", "Next", and "Exit" buttons. A small icon of a notepad with a green gear and a red 'X' is visible on the right side of the main area.

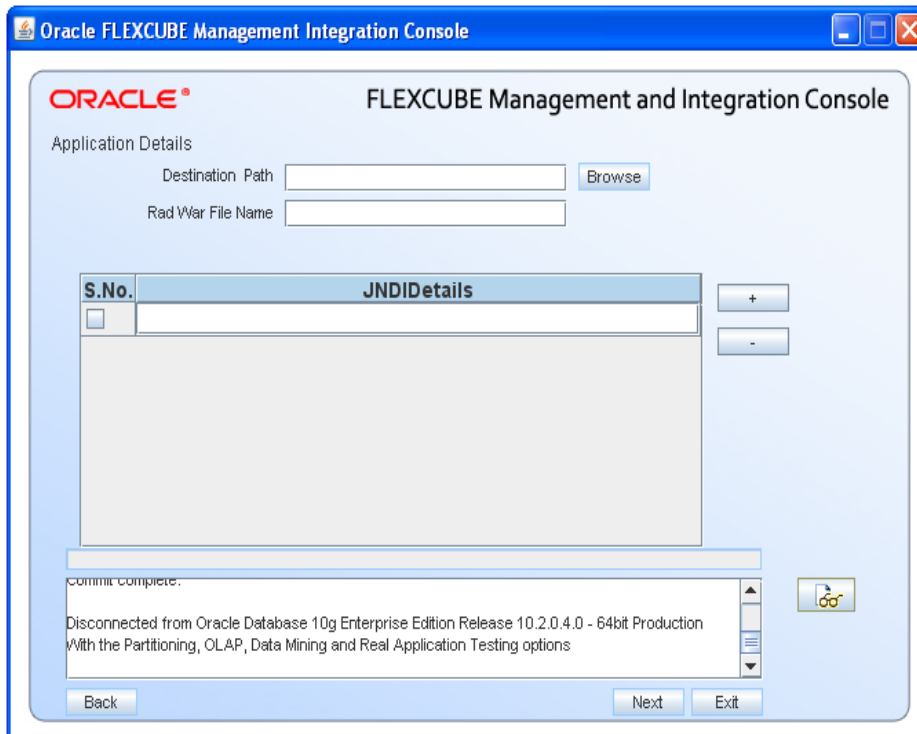

If you want create the war component, please enter the Destination path and War file Name otherwise it will compile only db object display the screen as follows

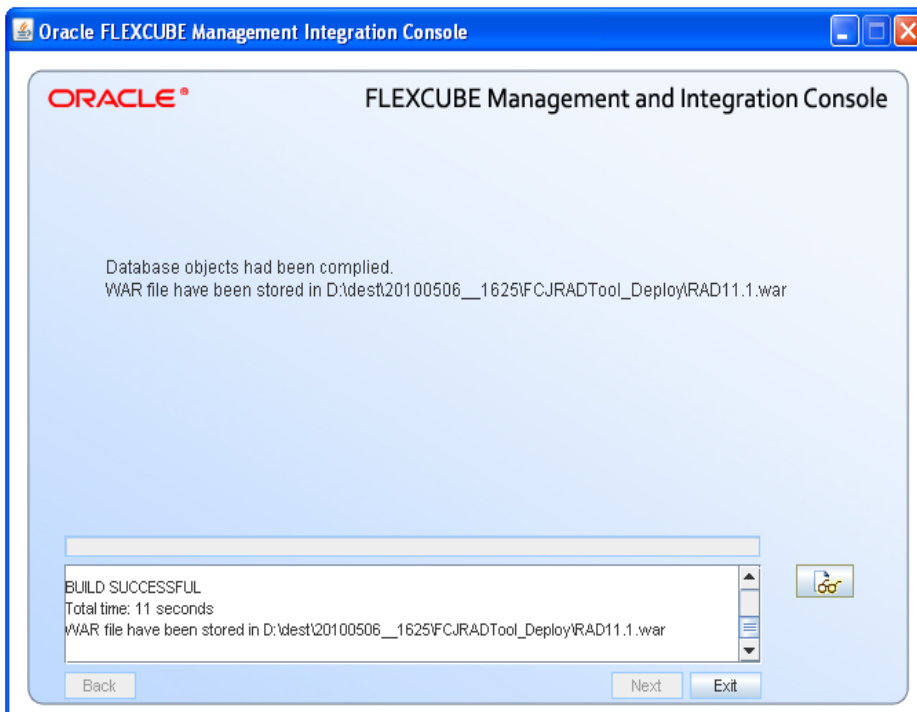


After generation of war file you can deploy war file in Application Server /Web server from destination path.

6. Troubleshooting


6.1 Checking Logs


In case an error occurs while doing a particular Open Development activity and the user wants to know the exception, he can look at the log file which contains detailed information about executed and the type of error thrown if any.

To check the log file open the logs folder in the installer source of your local system.

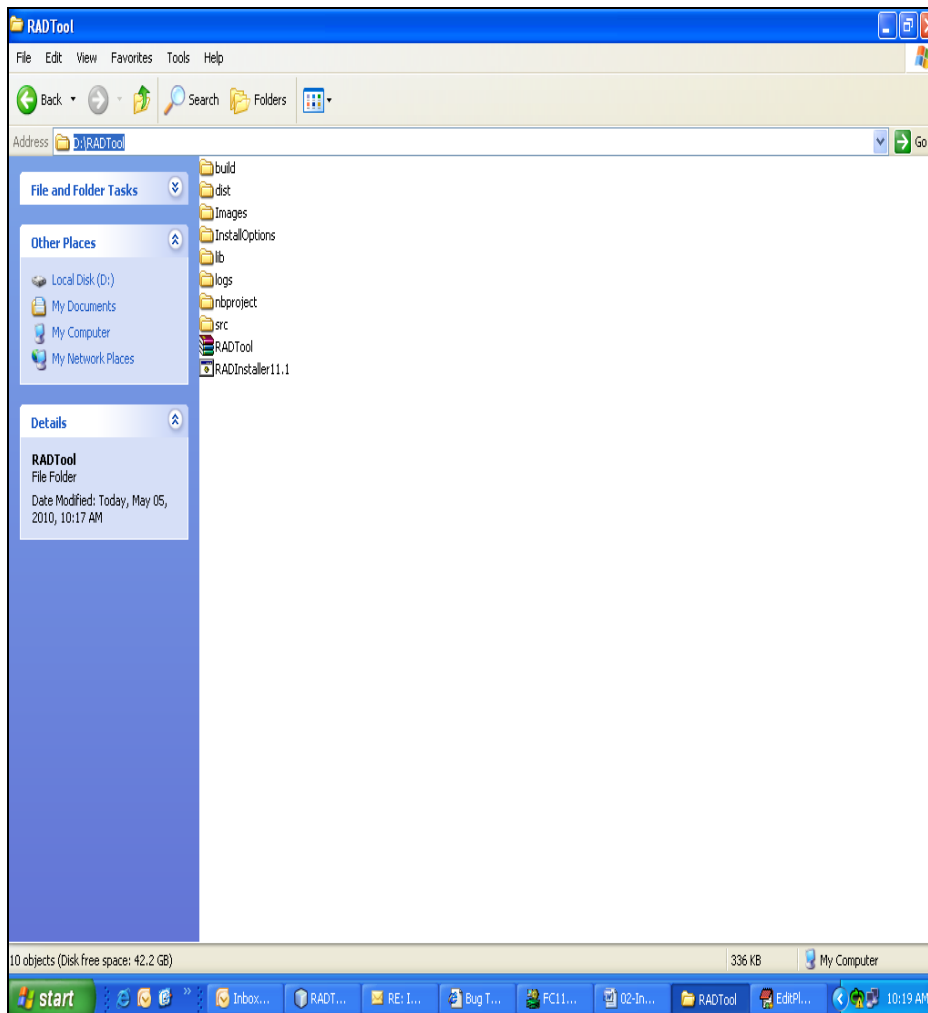

Please Enter the Open Development Schem detail where you are going to connect the Open Development schema and select the Open Development source which you are copied from vercon area and press next button .display the screen as follows

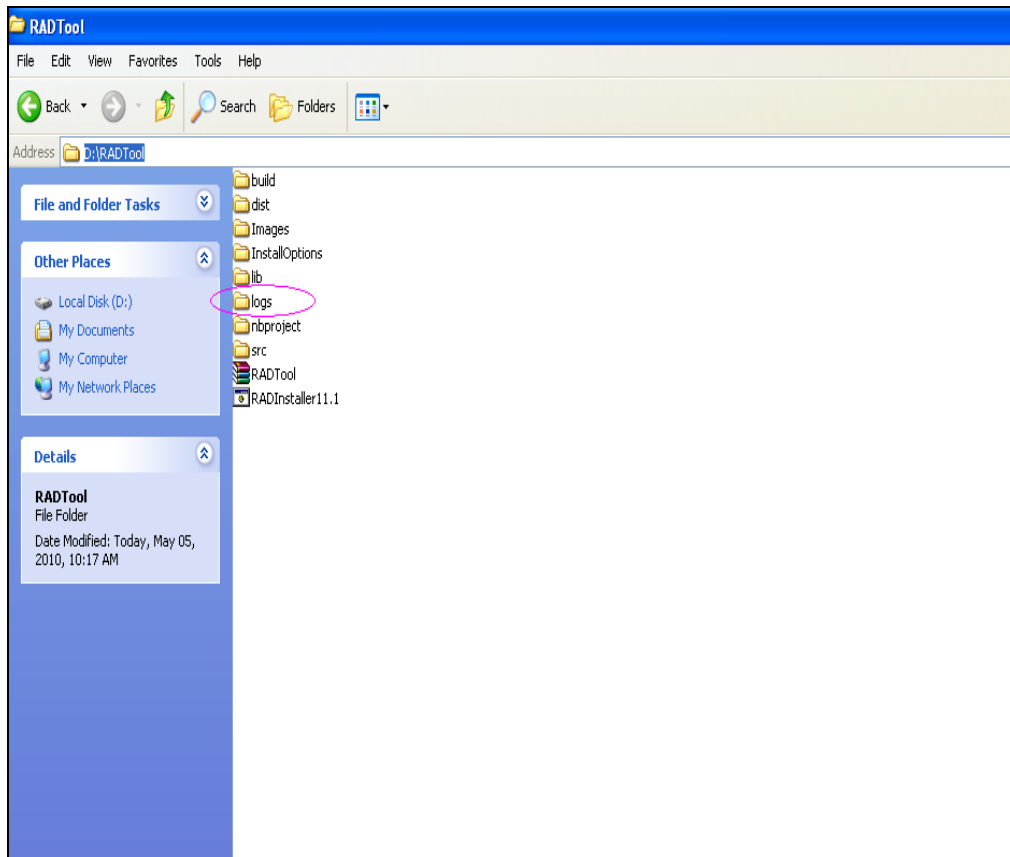

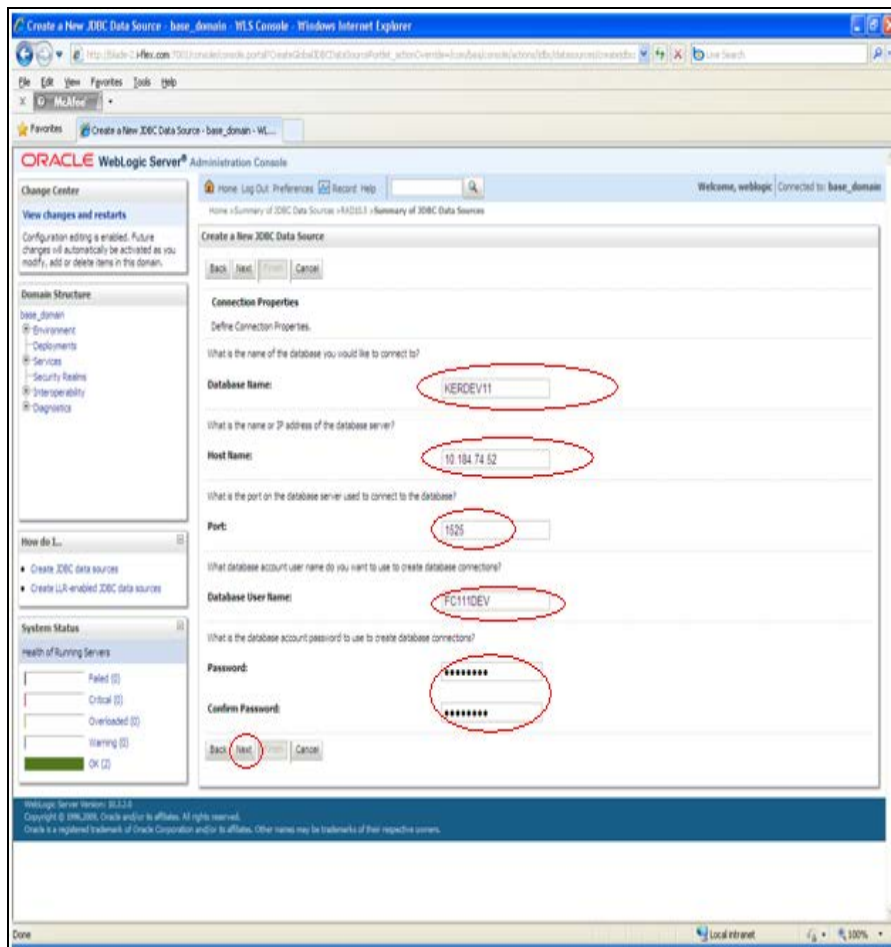

FCJRADTool.war file is generated at specified “destPath” i.e. in this case at RADTool_11.1

This completes WAR file generation and Database installation .

7. Deployment of WAR file to Application Server

7.1 Apache Tomcat 5.5 Server


To deploy **FCJRADTool.war** to Apache Tomcat 5.5 Server follow the below mentioned steps

7.1.1 Step 1

Open tomcat-users.xml from <apache-tomcat-5.5.20_home>\conf folder.

Add <user username="admin" password="admin" roles="manager,admin"/>

As shown in highlighted section of the below screenshot.

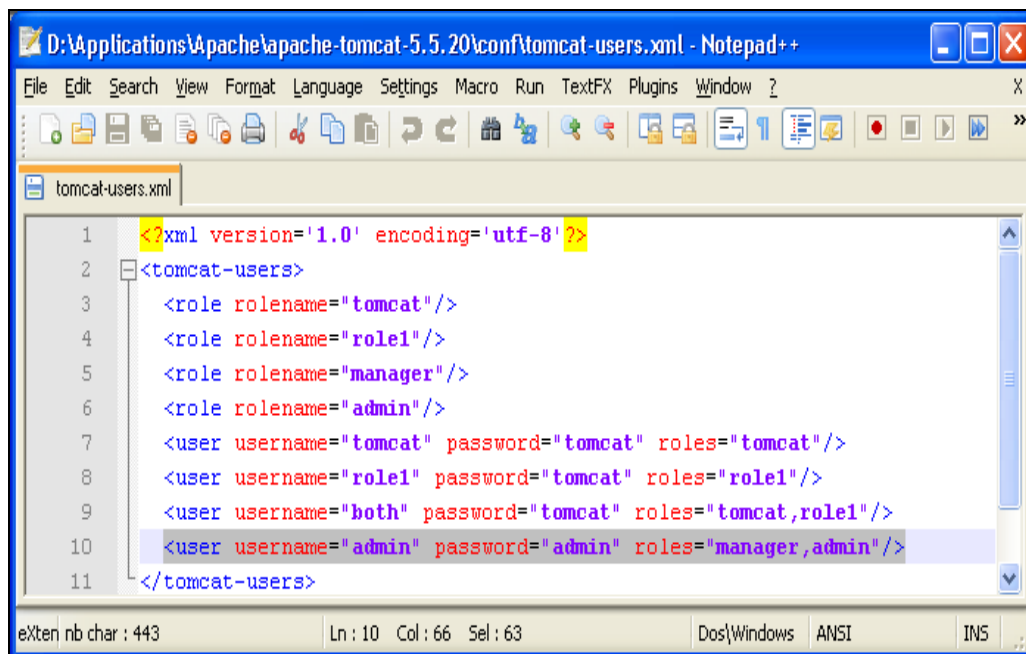


```
1 <?xml version='1.0' encoding='utf-8' ?>
2 <tomcat-users>
3   <role rolename="tomcat"/>
4   <role rolename="role1"/>
5   <role rolename="manager"/>
6   <role rolename="admin"/>
7   <user username="tomcat" password="tomcat" roles="tomcat"/>
8   <user username="role1" password="tomcat" roles="role1"/>
9   <user username="both" password="tomcat" roles="tomcat,role1"/>
10  <user username="admin" password="admin" roles="manager,admin"/>
11 </tomcat-users>
```

7.1.2 Step 2

Open Server.xml from <apache-tomcat-5.5.20_home>\conf folder.

Refer the highlighted section of screenshot below and add corresponding Datasource between <GlobalNamingResources></GlobalNamingResources> tags.

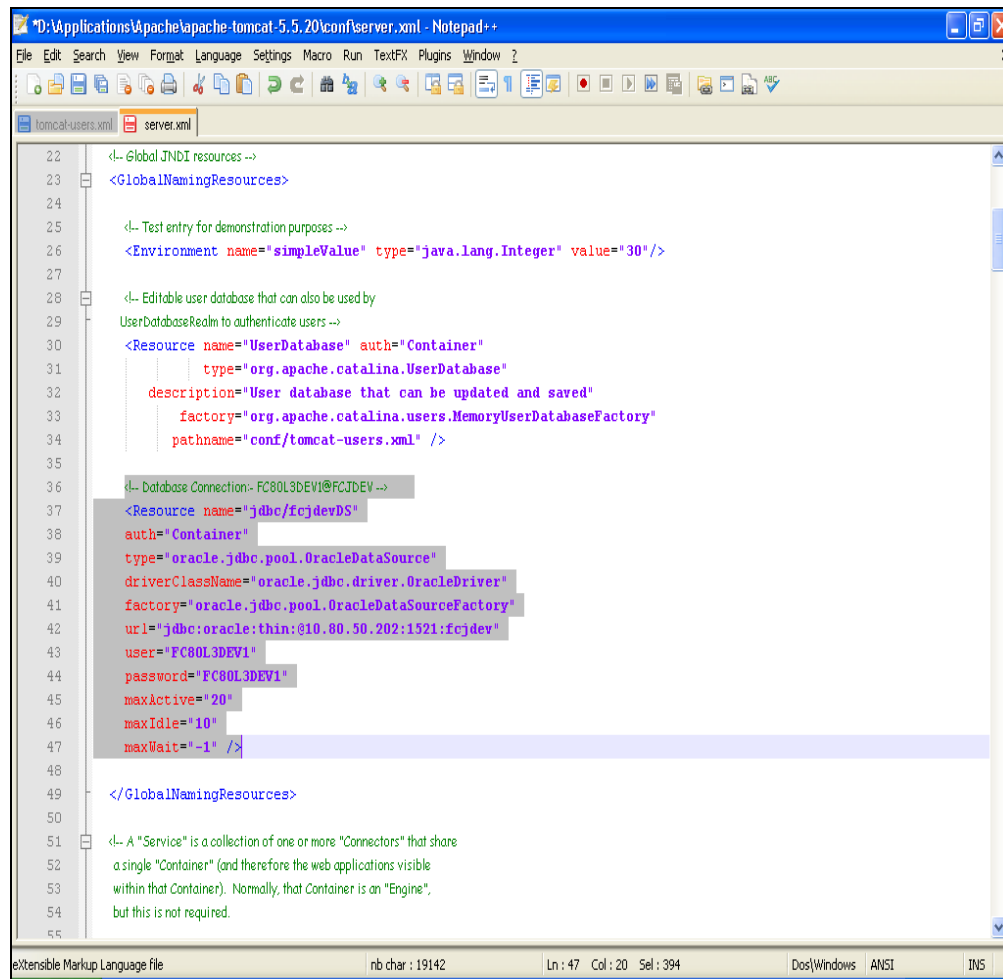


```
22 <!-- Global JNDI resources -->
23 <GlobalNamingResources>
24
25 <!-- Test entry for demonstration purposes -->
26 <Environment name="simpleValue" type="java.lang.Integer" value="30"/>
27
28 <!-- Editable user database that can also be used by
29      UserDatabaseRealm to authenticate users -->
30 <Resource name="UserDatabase" auth="Container"
31          type="org.apache.catalina.UserDatabase"
32          description="User database that can be updated and saved"
33          factory="org.apache.catalina.users.MemoryUserDatabaseFactory"
34          pathname="conf/tomcat-users.xml" />
35
36 <!-- Database Connection: FC80L3DEV1@FCJDEV -->
37 <Resource name="jdbc/fcjddevDS"
38          auth="Container"
39          type="oracle.jdbc.pool.OracleDataSource"
40          driverClassName="oracle.jdbc.driver.OracleDriver"
41          factory="oracle.jdbc.pool.OracleDataSourceFactory"
42          url="jdbc:oracle:thin:@10.80.50.202:1521:fcjddev"
43          user="FC80L3DEV1"
44          password="FC80L3DEV1"
45          maxActive="20"
46          maxIdle="10"
47          maxWait="-1" />
48
49 </GlobalNamingResources>
50
51 <!-- A "Service" is a collection of one or more "Connectors" that share
52      a single "Container" (and therefore the web applications visible
53      within that Container). Normally, that Container is an "Engine",
54      but this is not required.
55
```

7.1.3 Step 3

Open context.xml from <apache-tomcat-5.5.20_home>\conf folder.

Refer the highlighted section of screenshot below and add corresponding Resource Link

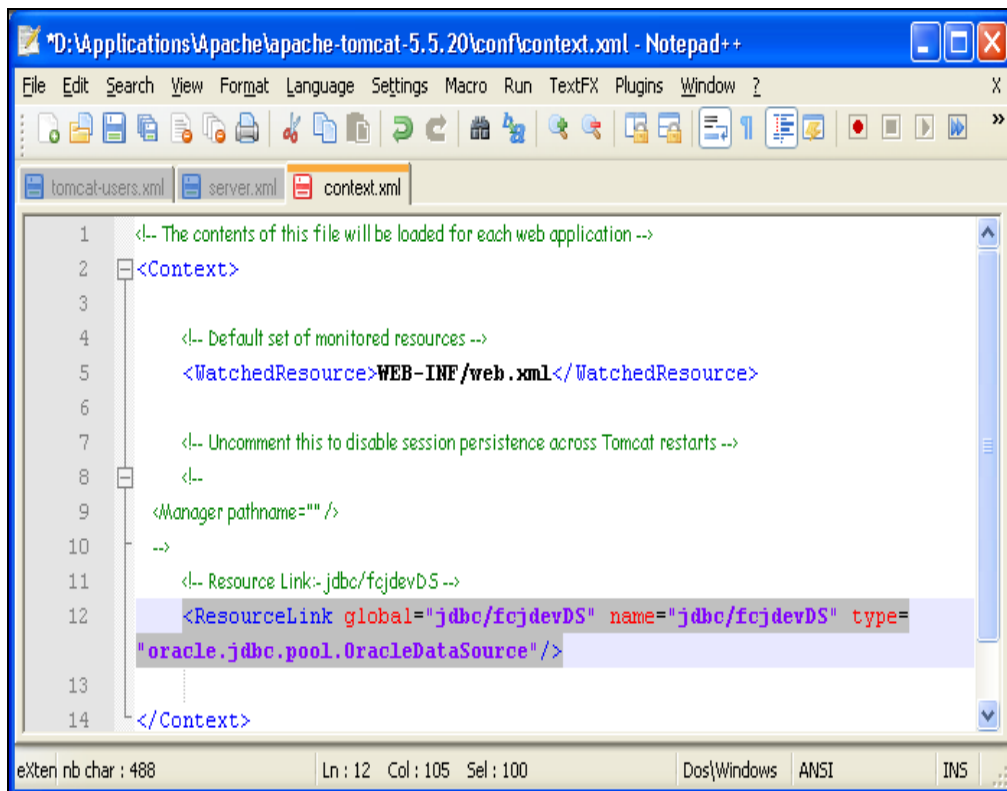

```
*D:\Applications\Apache\apache-tomcat-5.5.20\conf\context.xml - Notepad++
File Edit Search View Format Language Settings Macro Run TextFX Plugins Window ?
tomcat-users.xml server.xml context.xml
1 <!-- The contents of this file will be loaded for each web application -->
2 <Context>
3
4 <!-- Default set of monitored resources -->
5 <WatchedResource>WEB-INF/web.xml</WatchedResource>
6
7 <!-- Uncomment this to disable session persistence across Tomcat restarts -->
8 <!--
9 <Manager pathname="" />
10 -->
11 <!-- Resource Link: jdbc/fcjddevDS -->
12 <ResourceLink global="jdbc/fcjddevDS" name="jdbc/fcjddevDS" type=
13 "oracle.jdbc.pool.OracleDataSource" />
14 </Context>
exten nb char : 488 Ln : 12 Col : 105 Sel : 100 Dos\Windows ANSI INS
```


7.1.4 Step 4

Start Apache Tomcat 5.5 Server by double-clicking **startup.bat** from <apache-tomcat-5.5.20_home>\bin folder

7.1.5 Step 5


Launch Internet Explorer with URL Error! Hyperlink reference not valid.

Refer the screenshot below and enter **User Id** as **admin** and **password** as **admin**

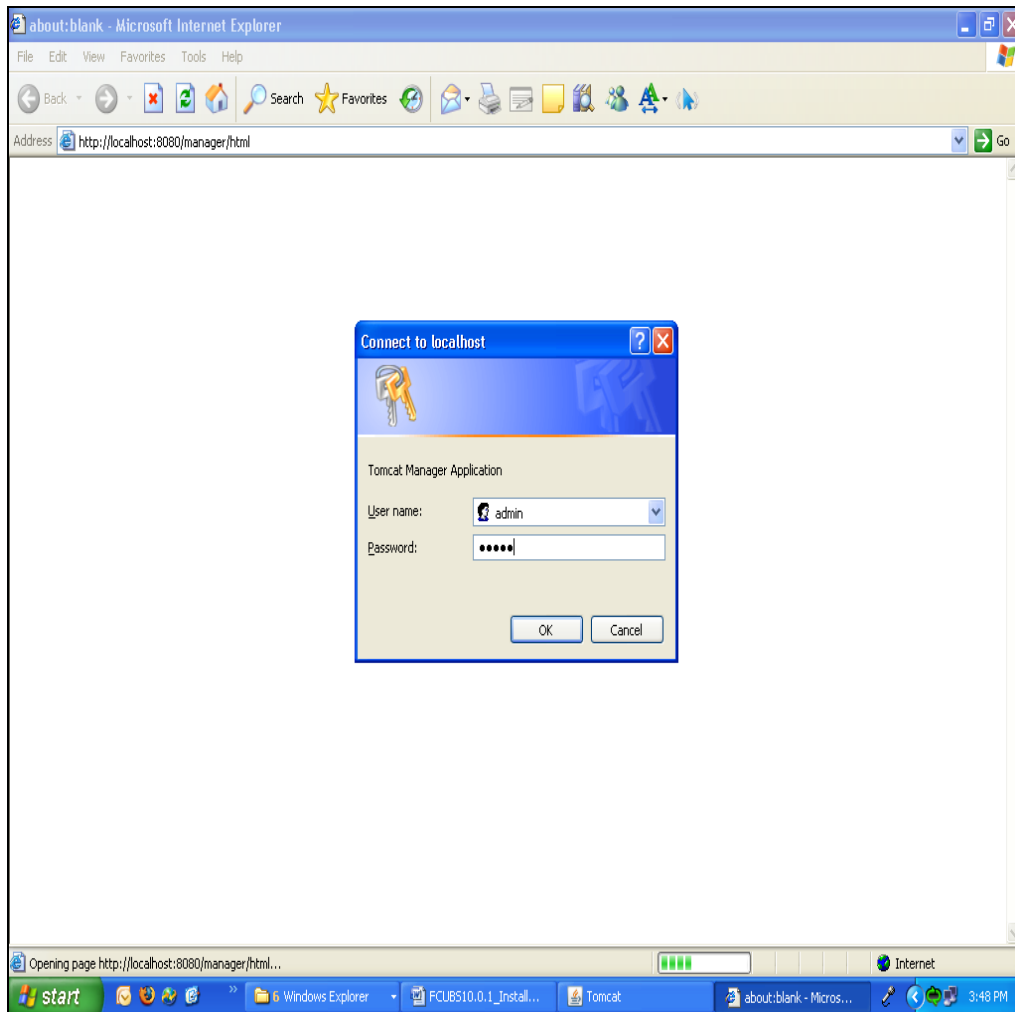

7.1.6 Step 6

Upload the generated **FCJRADTool.war** file from RADTool_11.1 folder as shown Below in the screen shot and then click **Deploy**.

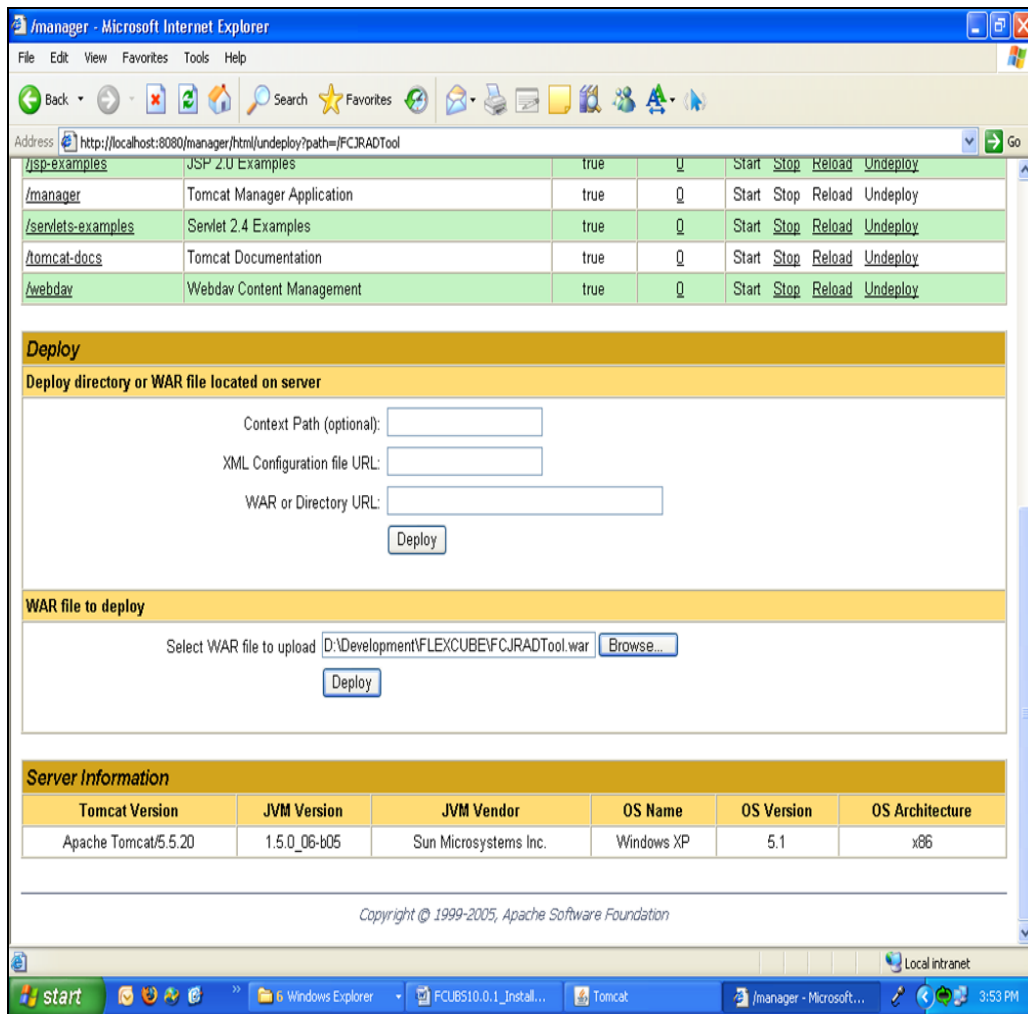

completes Deployment of FCJRADTool.war file to Apache Tomcat 5.5 Server.

RADTool 11.1 Application can be launched with the URL.


7.2 OC4J Application server

To deploy **FCJRADTool.war** to OC4J 10.1.3.X Application Server follow the below mentioned steps

Steps 1-15 explain creation of Connection Pool and Data Source. Skip these steps if Connection pool and data source already exists in the OC4J Application server.


7.2.1 Step 1

Login to Oracle 10g Application server's Administration console as shown below

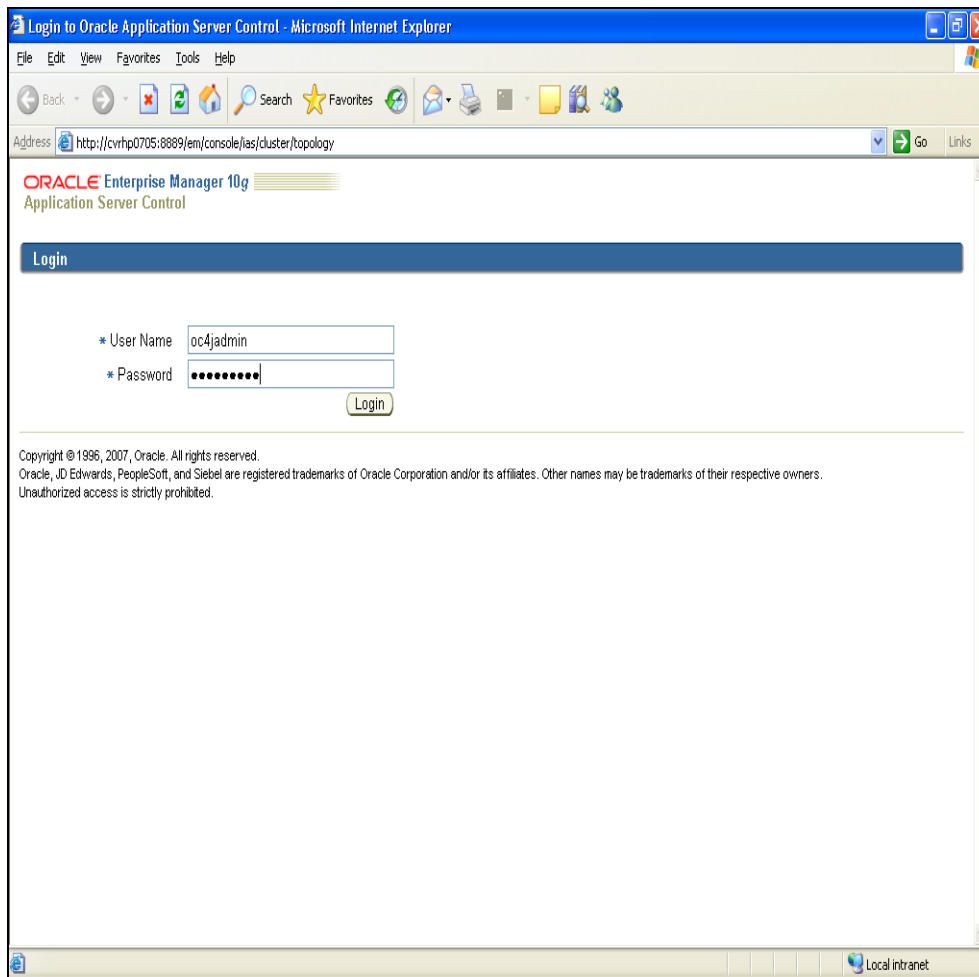

7.2.2 Step 2

Click **Home** as shown below

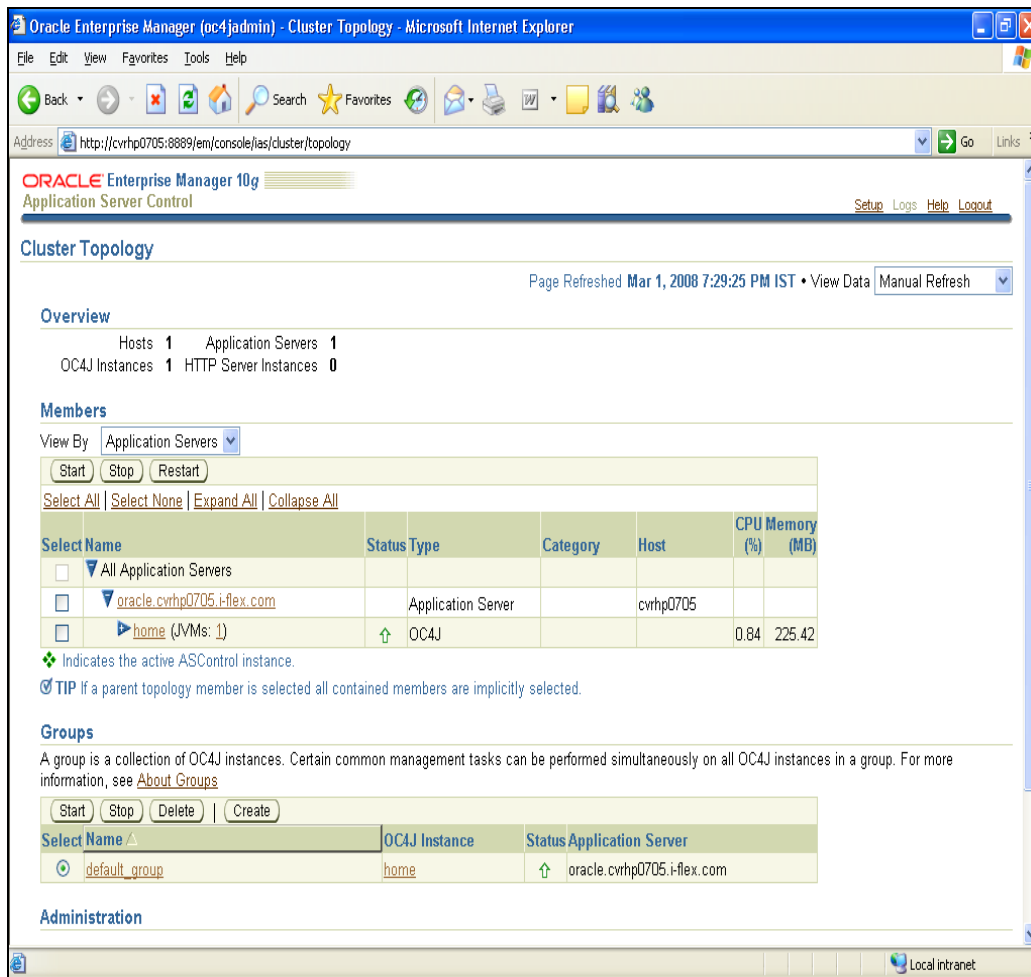

The screenshot shows the Oracle Enterprise Manager 10g Cluster Topology page in a Microsoft Internet Explorer browser. The address bar shows the URL: `http://cvrhp0705:8889/em/console/ias/cluster/topology`. The page title is "Oracle Enterprise Manager 10g Application Server Control". The main heading is "Cluster Topology". Below the heading, there is a status bar indicating "Page Refreshed Mar 1, 2008 7:29:25 PM IST" and a "View Data" dropdown menu set to "Manual Refresh".

The "Overview" section displays the following statistics:

- Hosts: 1
- Application Servers: 1
- OC4J Instances: 1
- HTTP Server Instances: 0

The "Members" section shows a "View By" dropdown set to "Application Servers". Below this, there are buttons for "Start", "Stop", and "Restart". A link "Select All" is also present. The table below lists the members:

Select	Name	Status	Type	Category	Host	CPU (%)	Memory (MB)
☐	All Application Servers						
☐	oracle.cvrhp0705.i-flex.com		Application Server		cvrhp0705		
☐	home (JVMs: 1)	↑	OC4J			0.84	225.42

Below the table, there is a note: "Indicates the active ASControl instance." and a tip: "TIP If a parent topology member is selected all contained members are implicitly selected."

The "Groups" section explains that a group is a collection of OC4J instances and provides a link to "About Groups". Below this, there are buttons for "Start", "Stop", "Delete", and "Create". The table below lists the groups:

Select	Name	OC4J Instance	Status	Application Server
☒	default_group	home	↑	oracle.cvrhp0705.i-flex.com

The "Administration" section is visible at the bottom of the page.

7.2.3 Step 3

Click Administration tab as shown below

The screenshot displays the Oracle Enterprise Manager 10g Application Server Control console in a Microsoft Internet Explorer browser window. The address bar shows the URL <http://cvrhp0705:8889/em/console/ias/oc4j/home>. The page title is "Oracle Enterprise Manager 10g Application Server Control". The navigation tabs include Home, Applications, Web Services, Performance, and Administration, with the Administration tab currently selected. The page indicates it was refreshed on Mar 1, 2008 at 7:34:11 PM IST.

General

Status: **Up** (Stop Restart)

Start Time: **Mar 1, 2008 4:19:25 PM IST**

Version: **10.1.3.3.0**

Oracle Home: **D:\OracleAS_SOA**

Host: **cvrhp0705.i.flex.com**

Virtual Machines: **1**

Notifications: **0**

Response and Load

The graph shows Request Processing Time (seconds) and Requests per second over time. The x-axis labels are 5:34, 6:00, 6:20, 6:40, 7:00, 7:20. The y-axis ranges from 0.0 to 1.0. The legend indicates that the blue area represents Request Processing Time (seconds) and the green area represents Requests per second.

Copyright © 1996, 2007, Oracle. All rights reserved.
Oracle, JD Edwards, PeopleSoft, and Siebel are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.
[About Oracle Enterprise Manager 10g Application Server Control](#)

7.2.4 Step 4

Click JDBC Resources as shown below

The screenshot shows the Oracle Enterprise Manager 10g Application Server Control interface in a Microsoft Internet Explorer browser. The address bar shows the URL: <http://cvrhp0705:8889/em/console/ias/oc4j/administration>. The page title is "ORACLE Enterprise Manager 10g Application Server Control". The breadcrumb navigation shows "Cluster Topology > Application Server: oracle.cvrhp0705.i-flex.com > OC4J: home". The page is refreshed on Mar 1, 2008 7:35:58 PM IST. The "Administration" tab is selected, and the "Expand All" link is visible. The table below lists the tasks available in the Administration section.

Task Name	Go to Task	Description
Administration Tasks		
Properties		
EJB Compiler Settings		Configure the EJB Compiler.
J2EE Websites		Manage the J2EE websites in this OC4J instance.
JSP Properties		Set JSP container properties.
Logger Configuration		Set log levels for all Loggers.
Thread Pool Configuration		Configure the thread pools of this OC4J instance.
Shared Libraries		Manage the shared libraries of this OC4J instance.
Server Properties		Configure server properties for this OC4J instance.
Services		
JDBC Resources		Create/delete/view data sources and connection pools.
Enterprise Messaging Service		
JMS Destinations		Create/delete/edit JMS destinations.
JMS Connection Factories		Configure JMS connection factories.
In-Memory and File Based Persistence		Configure settings for in-memory and file based persistence.
Database Persistence		Configure settings for database persistence.
OracleAS JMS Router		Configure the JMS Router.

7.2.5 Step 5

Click Create Connection Pool as shown below

The screenshot shows the Oracle Enterprise Manager (oc4jadmin) interface in a Microsoft Internet Explorer browser. The page title is "JDBC Resources". The address bar shows the URL: http://cvrhp0705:8889/em/console/ias/oc4j/admin/jdbc?infoKey=1d4_11869f8fa97. The page was refreshed on Mar 1, 2008 7:37:19 PM IST.

Under the "Data Sources" section, there is a "Create" button and a table listing existing data sources. The table has columns: Name, Application, JNDI Location, Connection Pool, Managed by OC4J, Test Connection, and Delete. The data sources listed are:

Name	Application	JNDI Location	Connection Pool	Managed by OC4J	Test Connection	Delete
"BPELSamplesDataSource"	default	jdbc/BPELSamplesDataSource	"BPELPM_CONNECTION_POOL"	✓		
"BPELServerDataSource"	default	jdbc/BPELServerDataSource	"BPELPM_CONNECTION_POOL"	✓		
"BPELServerDataSourceWorkflow"	default	jdbc/BPELServerDataSourceWorkflow	"BPELPM_CONNECTION_POOL"	✓		
"ESBDataSource"	default	jdbc/esb	"ESBPool"	✓		
"OracleDS"	default	jdbc/OracleDS	"Example Connection Pool"	✓		

Under the "Connection Pools" section, there is a "Create" button and a table listing existing connection pools. The table has columns: Name, Application, Connection Factory Class, Monitor Performance, Test Connection, Refresh Connection Pool, and Delete. The connection pools listed are:

Name	Application	Connection Factory Class	Monitor Performance	Test Connection	Refresh Connection Pool	Delete
"BPELPM_CONNECTION_POOL"	default	oracle.lite.pooljdbc.POLJDBCdriver				
"ESBPool"	default	oracle.lite.pooljdbc.POLJDBCdriver				
"Example Connection Pool"	default	oracle.jdbc.pool.OracleDataSource				

At the bottom of the page, there are links for [Setup](#), [Logs](#), [Help](#), and [Logout](#). Copyright information is also present: Copyright © 1996, 2007, Oracle. All rights reserved. Oracle, JD Edwards, PeopleSoft, and Siebel are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners. [About Oracle Enterprise Manager 10g Application Server Control](#)

7.2.6 Step 6

Click **Continue** as shown below

Oracle Enterprise Manager (oc4jadmin) - Create Connection Pool - Application - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Print Mail W Local intranet

Address <http://cvrhp0705:8889/em/console/ias/oc4j/jdbc/createCPAppChoice?app=> Go Links

ORACLE Enterprise Manager 10g

Application Server Control Setup Logs Help Logout

Cluster Topology > Application Server: oracle.cvrhp0705.i-flex.com > OC4J: home > JDBC Resources >

Create Connection Pool - Application Cancel Continue

Application

Select the application to which this new connection pool is to be added.

Application default

Connection Pool Type

☒ New Connection Pool

☐ New Connection Pool from Existing Connection Pool

Create a new connection pool that is configured like an existing connection pool.

Existing Connection Pool BPCLPM_CONNECTION_POOL

Cancel Continue

Setup | Logs | Help | Logout

Copyright © 1996, 2007, Oracle. All rights reserved.
Oracle, JD Edwards, PeopleSoft, and Siebel are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.
[About Oracle Enterprise Manager 10g Application Server Control](#)

Done Local intranet

7.2.7 Step 7

Refer the screen shots shown below. Provide equivalent information and click Finish

Oracle Enterprise Manager 10g
Application Server Control
Cluster Topology > Application Server: oracle.cvrhp0705.i-flex.com > OC4J: home > JDBC Resources >
Create Connection Pool
Cancel Back Finish
Page Refreshed Mar 1, 2008 7:40:18 PM IST

Home Attributes Proxy Interfaces

* Name FCUBS10.0ConnectionPool

* Connection Factory Class oracle.jdbc.pool.OracleDataSource
Class must be available to the application's class loader.

URL
You can either specify a URL directly or have it generated from connection information. When you test a connection, the connection factory class and credentials specified on this page will be used to perform the test.

☒ JDBC URL jdbc:oracle:thin:@//10.80.150.202:1521/FCJDEV Test Connection

☐ Generate URL from Connection Information Test Connection

Driver Type Thin

DB Host Name

DB Listener Port

DB Identifier Type Service Name

SID/Service Name

TNS Alias

Credentials
☒ TIP For OracleDataSources, credentials must be entered if not already specified in the URL.
Username FC80L3DEV1

Oracle Enterprise Manager 10g
Application Server Control
Cluster Topology > Application Server: oracle.cvrhp0705.i-flex.com > OC4J: home > JDBC Resources >
Create Connection Pool
Cancel Back Finish
Page Refreshed Mar 1, 2008 7:40:18 PM IST

Home Attributes Proxy Interfaces

* Name FCUBS10.0ConnectionPool

* Connection Factory Class oracle.jdbc.pool.OracleDataSource
Class must be available to the application's class loader.

URL
You can either specify a URL directly or have it generated from connection information. When you test a connection, the connection factory class and credentials specified on this page will be used to perform the test.

☒ JDBC URL jdbc:oracle:thin:@//10.80.150.202:1521/mydb.com Test Connection

☐ Generate URL from Connection Information Test Connection

Driver Type Thin

DB Host Name

DB Listener Port

DB Identifier Type Service Name

SID/Service Name

TNS Alias

Credentials
☒ TIP For OracleDataSources, credentials must be entered if not already specified in the URL.
Username FC80L3DEV1
☒ Use Cleartext Password Password
☐ Use Indirect Password Indirect Password
example: Scott, customers/Scott

Connection Factory Properties
Specify any properties needed by the connection factory here.

Name	Value	Delete
------	-------	--------

This creates the connection pool as shown below

Oracle Enterprise Manager (oc4jadmin) - JDBC Resources - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Address http://cvrhp0705:8889/em/console/ias/oc4j/admin/jdbc?infokey=1dd_11869f8a97

Application All

Data Sources

Create

Name	Application	JNDI Location	Connection Pool	Managed by OC4J	Test Connection	Delete
"BPELSamplesDataSource"	default	jdbc/BPELSamplesDataSource	"BPELPM_CONNECTION_POOL"	✓		
"BPELServerDataSource"	default	jdbc/BPELServerDataSource	"BPELPM_CONNECTION_POOL"	✓		
"BPELServerDataSourceWorkflow"	default	jdbc/BPELServerDataSourceWorkflow	"BPELPM_CONNECTION_POOL"	✓		
"ESBDataSource"	default	jdbc/esb	"ESBPool"	✓		
"OracleDS"	default	jdbc/OracleDS	"Example Connection Pool"	✓		

Connection Pools

Create

Name	Application	Connection Factory Class	Monitor Performance	Test Connection	Refresh Connection Pool	Delete
"BPELPM_CONNECTION_POOL"	default	oracle.lite.pooljdbc.POLJDBCdriver				
"ESBPool"	default	oracle.lite.pooljdbc.POLJDBCdriver				
"Example Connection Pool"	default	oracle.jdbc.pool.OracleDataSource				
"FCUBS10.0ConnectionPool"	default	oracle.jdbc.pool.OracleDataSource				

Setup | Logs | Help | Logout

Copyright © 1996, 2007, Oracle. All rights reserved.
 Oracle, JD Edwards, PeopleSoft, and Siebel are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.
[About Oracle Enterprise Manager 10g Application Server Control](#)

Local intranet

7.2.8 Step 8

Click **Test Connection** as shown below

Oracle Enterprise Manager (oc4jadmin) - JDBC Resources - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Address http://cvrhp0705:8889/em/console/ias/oc4j/admin/jdbc?infokey=1dd_11869f8a97

Application All

Data Sources

Create

Name	Application	JNDI Location	Connection Pool	Managed by OC4J	Test Connection	Delete
"BPELSamplesDataSource"	default	jdbc/BPELSamplesDataSource	"BPELPM_CONNECTION_POOL"	✓		
"BPELServerDataSource"	default	jdbc/BPELServerDataSource	"BPELPM_CONNECTION_POOL"	✓		
"BPELServerDataSourceWorkflow"	default	jdbc/BPELServerDataSourceWorkflow	"BPELPM_CONNECTION_POOL"	✓		
"ESBDataSource"	default	jdbc/esb	"ESBPool"	✓		
"OracleDS"	default	jdbc/OracleDS	"Example Connection Pool"	✓		

Connection Pools

Create

Name	Application	Connection Factory Class	Monitor Performance	Test Connection	Refresh Connection Pool	Delete
"BPELPM_CONNECTION_POOL"	default	oracle.lite.pooljdbc.POLJDBCdriver				
"ESBPool"	default	oracle.lite.pooljdbc.POLJDBCdriver				
"Example Connection Pool"	default	oracle.jdbc.pool.OracleDataSource				
"FCUBS10.0ConnectionPool"	default	oracle.jdbc.pool.OracleDataSource				


Setup | Logs | Help | Logout

Copyright © 1996, 2007, Oracle. All rights reserved.
 Oracle, JD Edwards, PeopleSoft, and Siebel are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.
[About Oracle Enterprise Manager 10g Application Server Control](#)

Local intranet


7.2.9 Step 9

Click **Test** as shown below

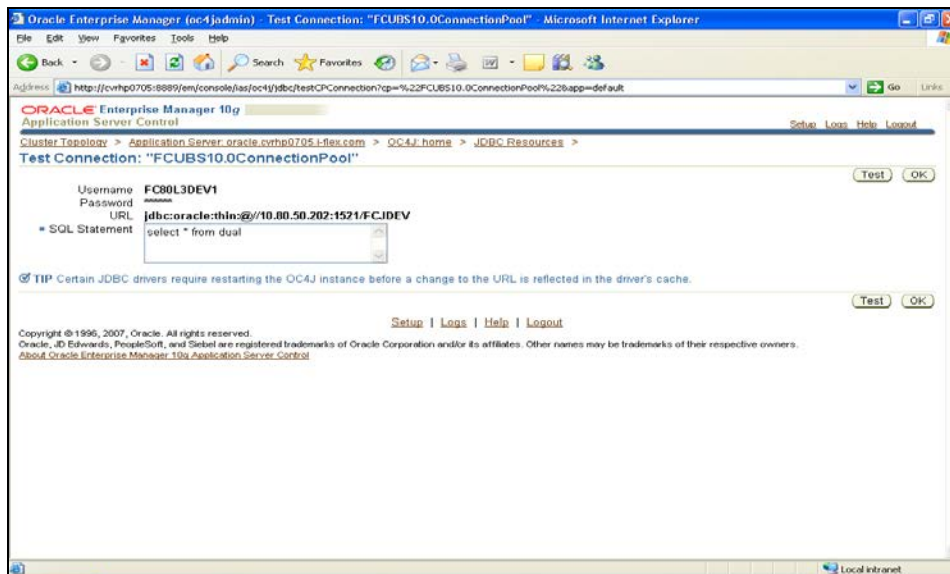

7.2.10 Step 10

Click **Create Data Sources** as shown below

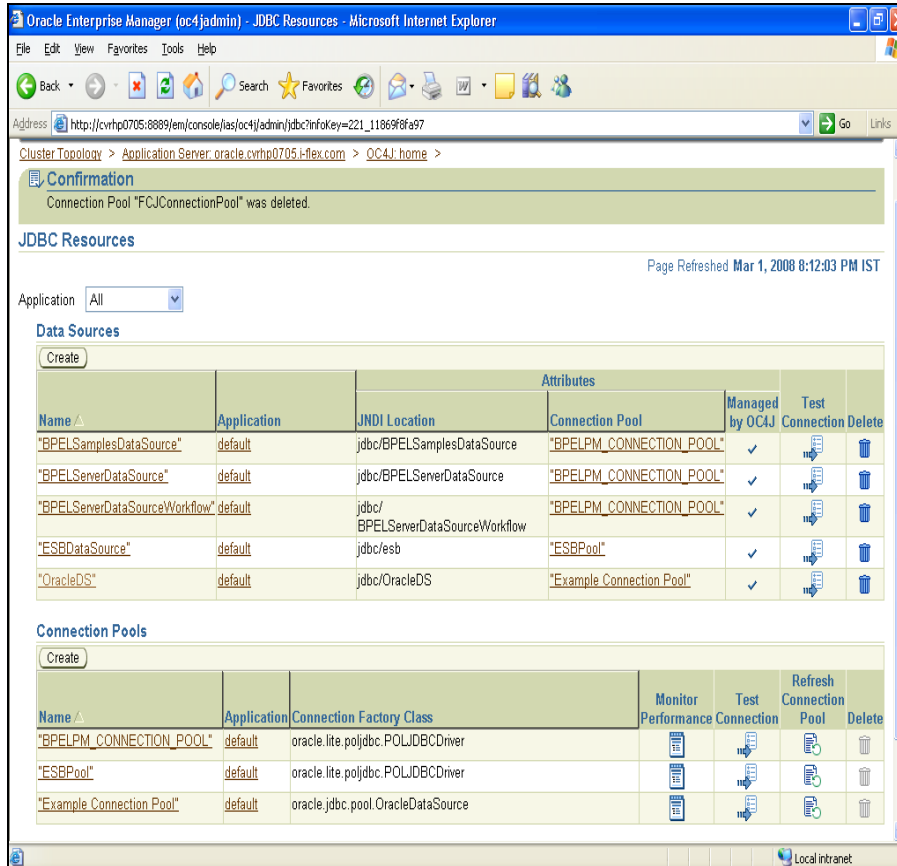

7.2.11 Step 11

Click **Continue** as shown below

The screenshot shows the Oracle Enterprise Manager 10g Application Server Control interface in a Microsoft Internet Explorer browser window. The title bar reads "Oracle Enterprise Manager (oc4jadmin) - Create Data Source - Application & Type - Microsoft Internet Explorer". The address bar shows the URL: <http://cvrhp0705:8889/em/console/ias/oc4j/jdbc/createDS?app=&dsType=managed>. The page header includes "ORACLE Enterprise Manager 10g" and "Application Server Control" with links for "Setup", "Logs", "Help", and "Logout". The breadcrumb trail is: "Cluster Topology > Application Server: oracle.cvrhp0705.i-flex.com > OC4J: home > JDBC Resources >". The main heading is "Create Data Source - Application & Type" with "Cancel" and "Continue" buttons. The "Application" section has a dropdown menu set to "default". The "Data Source Type" section has three radio button options: "Managed Data Source" (selected), "Native Data Source", and "New Data Source from Existing Data Source". Descriptions are provided for each type. The "Existing Data Source" dropdown is set to "BPESamplesDataSource". At the bottom, there are "Cancel" and "Continue" buttons, and a footer with copyright information and a "Local intranet" status bar.

7.2.12 Step 12

Refer the **screen shot** below. Provide **equivalent information** as shown below and click Finish.

Select the **Connection Pool** that was created from the combo box

Oracle Enterprise Manager 10g
Application Server Control

Cluster Topology > Application Server: oracle.cvrhp0705.i-flex.com > OC4J: home > JDBC Resources > Create Data Source - Managed Data Source

Cancel Back Finish

Application default

* Name fcjdevDS

* JNDI Location jdbc/fcjdevDS

Transaction Level Global & Local Transactions

Connection Pool FCUBS10ConnectionPool

* Login Timeout (seconds) 0
Maximum time to wait while attempting to connect to a database.

Credentials

Cancel Back Finish

Setup | Logs | Help | Logout

Copyright ©1996, 2007, Oracle. All rights reserved.
Oracle, JD Edwards, PeopleSoft, and Siebel are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.
[About Oracle Enterprise Manager 10g Application Server Control](#)

This creates Data Source as shown below.

Oracle Enterprise Manager (oc4jadmin) - JDBC Resources - Microsoft Internet Explorer

Address: http://cvrhp0705:8889/em/console/ias/oc4j/admin/jdbc?infokey=234_11869f8fa97

ORACLE Enterprise Manager 10g
Application Server Control

Cluster Topology > Application Server: oracle.cvrhp0705.i-flex.com > OC4J: home >

Confirmation
Data Source fcjdevDS has been created.

JDBC Resources
Page Refreshed Mar 1, 2008 8:27:15 PM IST

Application: All

Data Sources

Create

Name	Application	Attributes		Managed by OC4J	Test Connection	Delete
		JNDI Location	Connection Pool			
"BPELSamplesDataSource"	default	jdbc/BPELSamplesDataSource	"BPELPM_CONNECTION_POOL"	✓		
"BPELServerDataSource"	default	jdbc/BPELServerDataSource	"BPELPM_CONNECTION_POOL"	✓		
"BPELServerDataSourceWorkflow"	default	jdbc/BPELServerDataSourceWorkflow	"BPELPM_CONNECTION_POOL"	✓		
"ESBDataSource"	default	jdbc/esb	"ESBPool"	✓		
"fcjdevDS"	default	jdbc/fcjdevDS	"FCUBS10ConnectionPool"	✓		
"OracleDS"	default	jdbc/OracleDS	"Example Connection Pool"	✓		

Connection Pools

Create

Name	Application	Connection Factory Class	Monitor Performance	Test Connection	Refresh Connection Pool	Delete
"BPELPM_CONNECTION_POOL"	default	oracle.lite.pooljdbc.POLJDBCDriver				

Done Local intranet

7.2.13 Step 13

Click Test Connection as shown below

The screenshot shows the Oracle Enterprise Manager 10g JDBC Resources page. The page title is "Oracle Enterprise Manager (oc4jadmin) - JDBC Resources - Microsoft Internet Explorer". The address bar shows the URL: http://cvrhp0705:8889/em/console/jas/oc4j/admin/jdbc?infokey=234_11869f8a97. The page content includes a confirmation message: "Data Source fcjdevDS has been created." Below this, the "JDBC Resources" section is displayed. It has a dropdown menu for "Application" set to "All". The "Data Sources" section contains a table with the following data:

Name	Application	JNDI Location	Connection Pool	Managed by OC4J	Test Connection	Delete
"BPESamplesDataSource"	default	jdbc/BPESamplesDataSource	"BPELPM_CONNECTION_POOL"	✓	Test	Delete
"BPEServerDataSource"	default	jdbc/BPEServerDataSource	"BPELPM_CONNECTION_POOL"	✓	Test	Delete
"BPEServerDataSourceWorkflow"	default	jdbc/BPEServerDataSourceWorkflow	"BPELPM_CONNECTION_POOL"	✓	Test	Delete
"ESBDataSource"	default	jdbc/esb	"ESBPool"	✓	Test	Delete
"fcjdevDS"	default	jdbc/fcjdevDS	"FCUBS10ConnectionPool"	✓	Test	Delete
"OracleDS"	default	jdbc/OracleDS	"Example Connection Pool"	✓	Test	Delete

Below the Data Sources table is the "Connection Pools" section, which contains a table with the following data:

Name	Application	Connection Factory Class	Monitor Performance	Test Connection	Refresh Connection Pool	Delete
"BPELPM_CONNECTION_POOL"	default	oracle.lite.pool.jdbc.POLJDBCdriver	Monitor	Test	Refresh	Delete

7.2.14 Step 14

Click Test as shown below

The screenshot shows the Oracle Enterprise Manager 10g Test Connection dialog for the "fcjdevDS" data source. The dialog title is "Oracle Enterprise Manager (oc4jadmin) - Test Connection: 'fcjdevDS' - Microsoft Internet Explorer". The address bar shows the URL: <http://cvrhp0705:8889/em/console/jas/oc4j/jdbc/testDSConnection?ds=%2FfcjdevDS%22&app=default>. The dialog content includes the following fields:

- Username: Not Specified
- Password: Not Specified
- URL: jdbc:oracle:thin:@10.80.50.202:1521/FCJDEV
- SOL Statement: select * from dual

Below the fields is a "TIP" section: "Certain JDBC drivers require restarting the OC4J instance before a change to the URL is reflected in the driver's cache." At the bottom of the dialog are "Test" and "OK" buttons.

This completes Data source creation

7.2.15 Step 15

Click **Applications Tab** to navigate to the screen shown and then click **Deploy**

The screenshot shows the Oracle Enterprise Manager 10g Application Server Control console in a Microsoft Internet Explorer browser window. The address bar shows the URL: <http://localhost:8888/em/console/ias/oc4j/applications>. The page title is "OC4J: home". The navigation tabs include Home, Applications (selected), Web Services, Performance, and Administration. The page indicates it was refreshed on Apr 20, 2009 4:20:02 PM IST.

This page shows the J2EE applications and application components (EJB Modules, WAR Modules, Resource Adapter Modules) deployed to this OC4J instance.

View: Applications

Buttons: Start, Stop, Restart, Undeploy, Redeploy, Deploy

Links: Select All, Select None, Expand All, Collapse All

Select	Name	Status	Start Time	Active Requests	Request Processing Time (seconds)	Active EJB Methods	Application Defined MBeans
☐	▼ All Applications						
☐	ascontrol	↑	Apr 20, 2009 4:14:55 PM IST	1	0.06	0	
☐	▼ default	↑	Apr 20, 2009 4:14:54 PM IST	0	0.00	0	
☐	► Middleware Services						

TIP If you stop a parent application (such as the default application), then Enterprise Manager automatically stops any child applications that depend upon the parent application. Similarly, if you start a child application, Enterprise Manager automatically starts the required parent application.

Navigation: Home, Applications, Web Services, Performance, Administration

Links: Setup, Logs, Help, Logout

Copyright © 1996, 2007, Oracle. All rights reserved.
Oracle, JD Edwards, PeopleSoft, and Siebel are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.
[About Oracle Enterprise Manager 10g Application Server Control](#)

Done Local intranet

7.2.16 Step 16

Upload **FCJRADTool.war** file as shown below and click Next

The screenshot shows the Oracle Enterprise Manager 10g Application Server Control interface in a Microsoft Internet Explorer browser window. The title bar reads "Oracle Enterprise Manager (oc4jadmin) - Deploy: Select Archive - Microsoft Internet Explorer". The address bar shows the URL: `http://localhost:8888/em/console/ias/j2ee/deploy/deploySelectArchive?command=startWizard&appName=apps`. The page header includes "ORACLE Enterprise Manager 10g" and "Application Server Control" with links for "Setup", "Logs", "Help", and "Logout". A progress bar at the top indicates three steps: "Select Archive" (current), "Application Attributes", and "Deployment Settings".

The main content area is titled "Deploy: Select Archive" and includes a "Cancel" button and a "Next" button (labeled "Step 1 of 3").

Archive

The following types of archives can be deployed: J2EE application (EAR files), Web Modules (WAR files), EJB Modules (EJB JAR files) and Resource Adapter Modules (RAR files).

☒ Archive is present on local host. Upload the archive to the server where Application Server Control is running.
Archive Location:

☐ Archive is already present on the server where Application Server Control is running.
Location on Server:
The location on server must be the absolute path or the relative path from j2ee/home

Deployment Plan

The deployment plan is an XML file that contains the deployment settings for an application. If you do not have a deployment plan, one will be created automatically during the deployment process. Later in the deployment process, you can optionally edit the deployment plan and save it for a future deployment of this application.

☒ Automatically create a new deployment plan.
The deployment plan settings will be based on OC4J defaults and information contained in the archive

☐ Deployment plan is present on local host. Upload the deployment plan to the server where Application Server Control is running.
Plan Location:

☐ Deployment plan is already present on server where Application Server Control is running.
Location on Server:
The location on server must be the absolute path or the relative path from j2ee/home

At the bottom of the form, there are "Cancel", "Step 1 of 3", and "Next" buttons. The footer contains copyright information: "Copyright © 1996, 2007, Oracle. All rights reserved. Oracle, JD Edwards, PeopleSoft and Siebel are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners."

7.2.17 Step 17

Refer the screen shot below and click Next

The screenshot shows the Oracle Enterprise Manager 10g Application Server Control console in a Microsoft Internet Explorer browser window. The address bar shows the URL: <http://localhost:8888/em/console/ias/j2ee/deploy/deployAppAttributes>. The page title is "Oracle Enterprise Manager 10g Application Server Control". The navigation bar shows three steps: "Select Archive", "Application Attributes" (current step), and "Deployment Settings". The main content area is titled "Deploy: Application Attributes" and includes the following information:

- Archive Type: **Web Module (WAR file)**
- Archive Location: **D:\Development\FLEXCUBE\FCJRADTool.war**
- Deployment Plan: **Creating a new plan**

Below this information, there are several input fields and dropdown menus:

- * Application Name:
- Parent Application:
- Bind Web Module to Site:
- Context Root:

Web Module	Context Root
ORACLE RAD Tool	FCJRADTool

At the bottom of the form, there are links for "Help" and "Logout". The footer contains copyright information: "Copyright © 1996, 2007, Oracle. All rights reserved. Oracle, JD Edwards, PeopleSoft, and Siebel are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners." and a link to "About Oracle Enterprise Manager 10g Application Server Control".

7.2.18 Step 18

Click **Go To Task for Map Environment Reference** as shown below

Oracle Enterprise Manager 10g
Application Server Control

Address: <http://localhost:8888/em/console/ias/j2ee/deploy/deploymentSettings>

Help Logout

Select Archive Application Attributes **Deployment Settings**

Deploy: Deployment Settings

Cancel Back Step 3 of 3 Deploy

Archive Type **Web Module (WAR file)**
Archive Location **D:\Development\FLEXCUBE\FCJRADTool.war**
Deployment Plan **Creating a new plan**

Application Name **FCJRADTool**
Parent Application **default**
Bind Web Module to Site **default-web-site**
Context Root **FCJRADTool**

Deployment Tasks

The table below provides a set of common deployment tasks you might want to perform for this application. Only those tasks that apply to the current application are enabled.

Task Name	Go To Task	Description
Map Environment References		Map any environment references in your application (for example, data sources) to physical entities currently present on the operational environment.
Select Security Provider		A security provider acts as the source for available users and groups when mapping security roles.
Map Security Roles		Map any security roles exposed by your application to existing users and groups. The list of users and groups is obtained from the security provider you selected for this application.
Configure EJBs		Configure the Enterprise JavaBeans in your application.
Configure Clustering		Configure clustering of your application.
Configure Class Loading		Manipulate the classpath of your application.

Advanced Deployment Plan Editing

Click Edit Deployment Plan to set more advanced deployment options. [Edit Deployment Plan](#)

Save Deployment Plan

After you make changes, you can save the deployment plan to your local disk. You

Local intranet

7.2.19 Step 19

Refer the screen shot below and enter corresponding details and then click OK.

Oracle Enterprise Manager 10g
Application Server Control

Deployment Settings: Map Environment References

Archive Type: **Web Module (WAR file)**
Archive Location: **D:\Development\FLEXCUBE\FCJRADTool.war**
Deployment Plan: **Creating a new plan**

Application Name: **FCJRADTool**
Parent Application: **default**
Bind Web Module to Site: **default-web-site**
Context Root: **FCJRADTool**

Map Resource References

The table below lists the resource references which need to be associated with physical entities on the system where the selected instance/cluster is running.

Resource Reference	Description	Type	Referenced By		Map to JNDI Location
			Module	Enterprise Bean	
jdbc/fccdev		javax.sql.DataSource	ORACLE RAD Tool	n/a	jdbc/fccdev
jdbc/fcdev		javax.sql.DataSource	ORACLE RAD Tool	n/a	jdbc/fcdev
jdbc/fcdevDS		javax.sql.DataSource	ORACLE RAD Tool	n/a	jdbc/fcdevDS


Map URL Resource References

The table below lists the resource references of type java.net.URL each of which must be linked to a URL.

Resource Reference	Description	Referenced By		
		Module	Enterprise Bean	Map to URL
No resource references were				

7.2.20 Step 20

Click Deploy

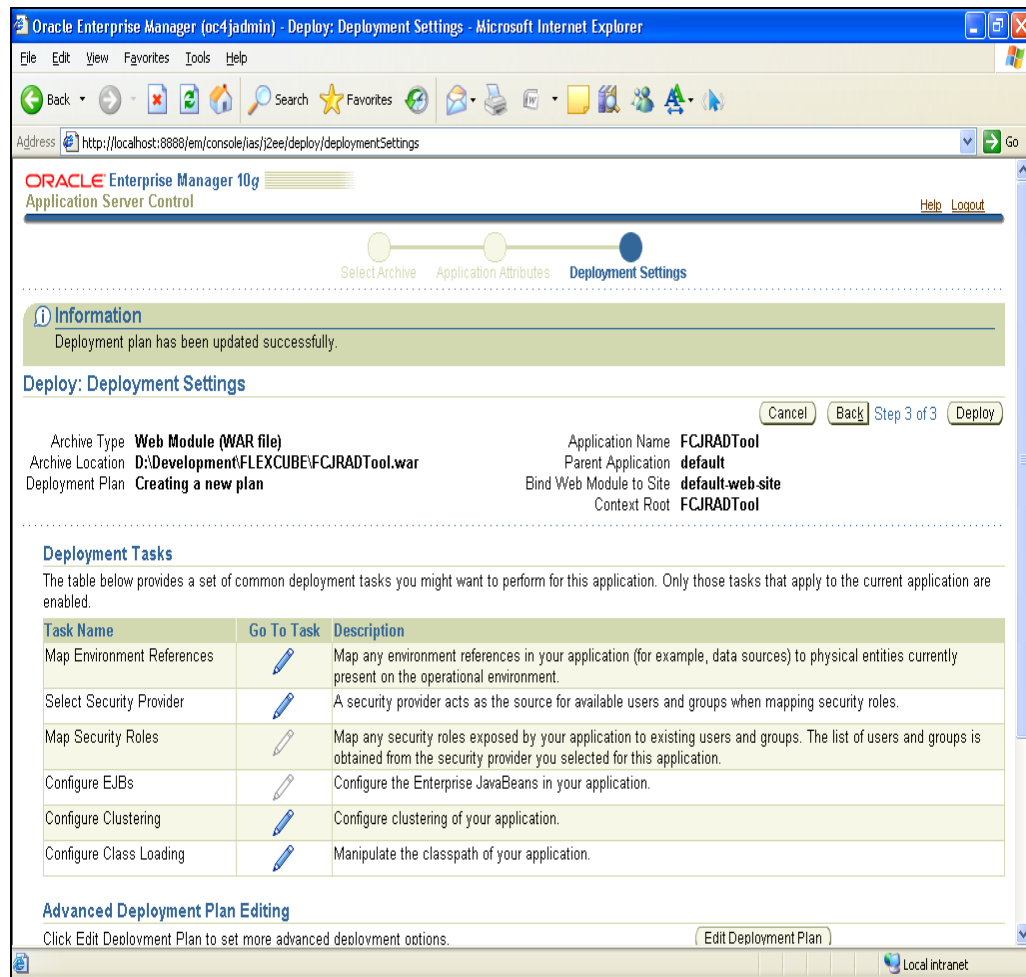


This completes Deployment of FCJRADTool.war file to OC4J 10.1.3.x Application server.

7.3 WebLogic Application server

To deploy **FCJRADTool.war** to WebLogic Application Server follow the below mentioned steps


Steps 1-18 explain creation of Connection Pool and Data source. Skip these steps if Connection pool and data source already exists in the WebLogic Application server.

Login to the Weblogic Server with <USername> and <Password>

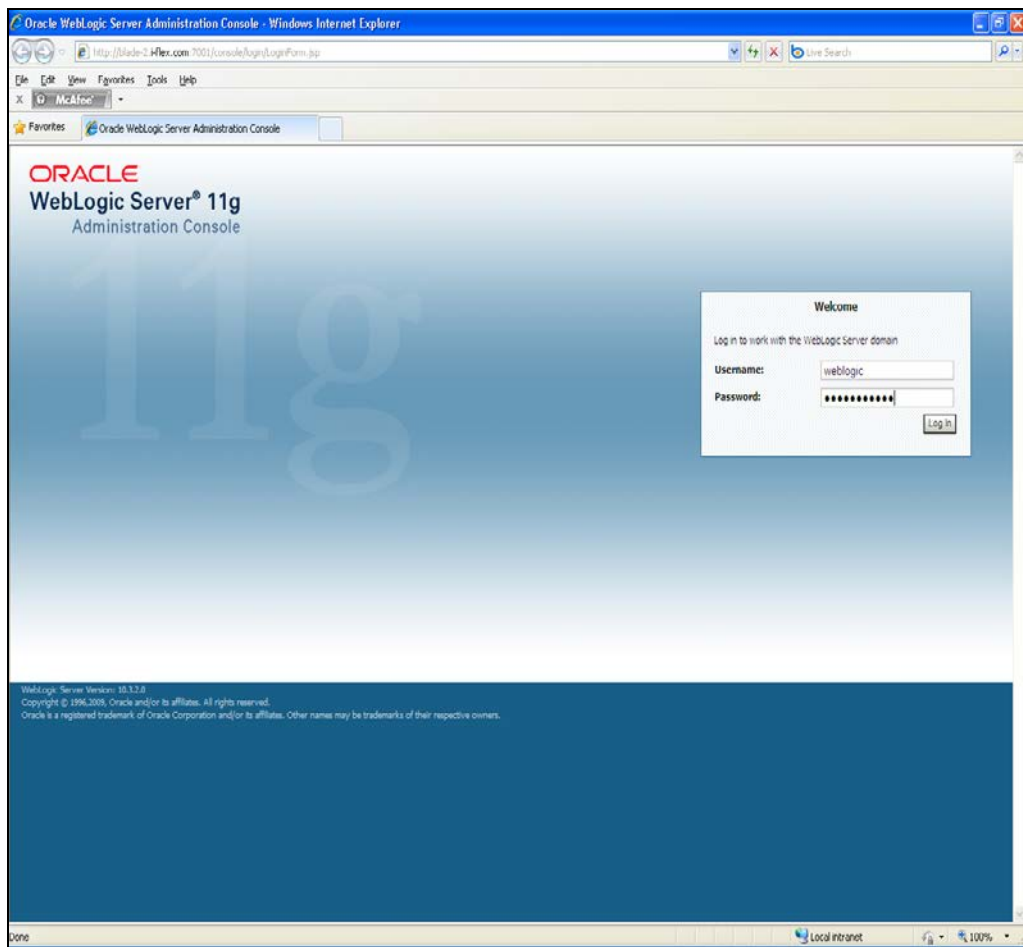

7.3.1 Step 1

Under Domain Configurations→Services→JDBC, Click on Data Sources

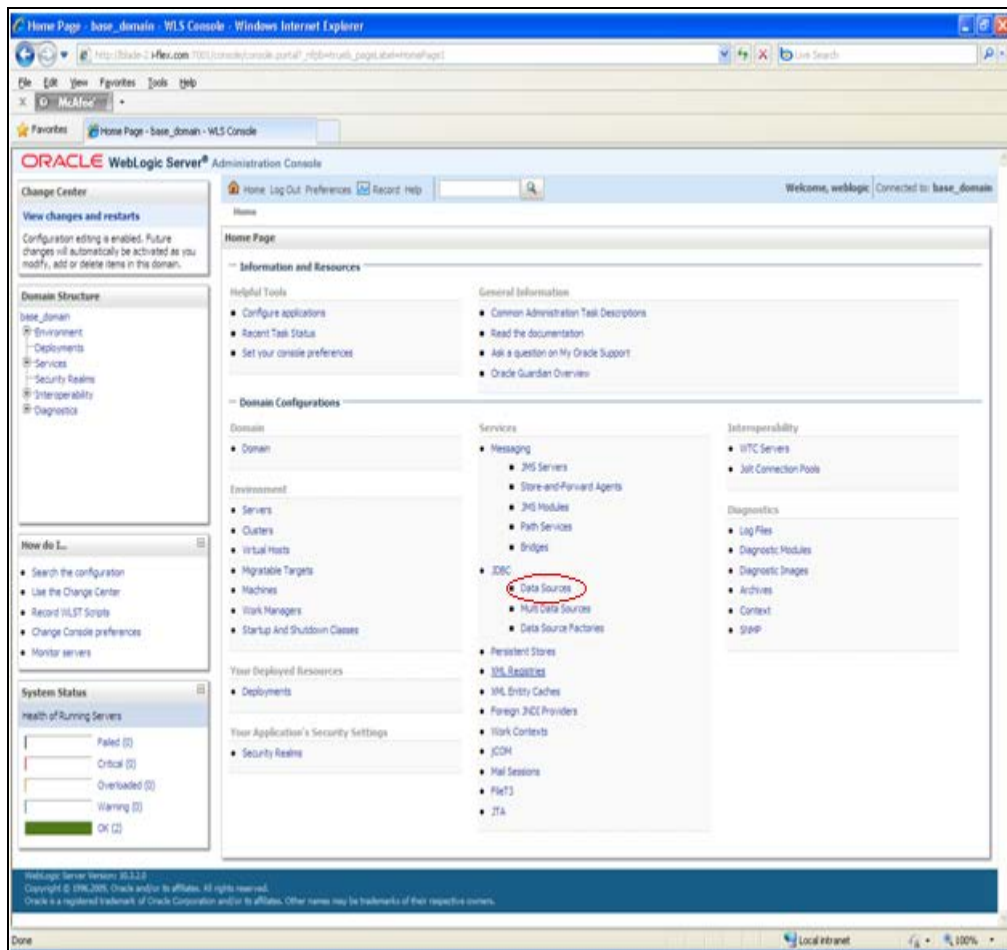

7.3.2 Step 2

JDBC Data Sources shows a list of available Data Sources. To create a new DS, Click on New

The screenshot shows the Oracle WebLogic Server Administration Console in a web browser. The page title is "Summary of JDBC Data Sources - base_domain - WLS Console - Windows Internet Explorer". The URL is "http://blake2:7001/console/console.portal?_afdcwtrwb_pageid=GlobalJDBCDataSourceTablePage". The page content includes a "Summary of JDBC Data Sources" section with a description and a table of existing data sources. The "New" button is circled in red.

Summary of JDBC Data Sources

A JDBC data source is an object bound to the JNDI tree that provides database connectivity through a pool of JDBC connectors. Applications can look up a data source on the JNDI tree and then borrow a database connection from a data source.

This page summarizes the JDBC data source objects that have been created in this domain.

Customize this table

Data Sources (Filtered - More Columns Exist)

Showing 1 to 4 of 4 Previous | Next

☐	Name vs	JNDI Name	Targets
☐	fcjScheduleDS	jdbc/fcjScheduleDS	ManagedServer_1
☐	FCJBS11.1	jdbc/fcjbs11.1	ManagedServer_1
☐	HDPC	jdbc/fcjbs11.1	ManagedServer_1
☐	RAO10.5	jdbc/PCCODEV	ManagedServer_1

Showing 1 to 4 of 4 Previous | Next

New **Cancel**

7.3.3 Step 3

- Give a suitable name for the Data Source. The JNDI Name(Case Sensitive) should match the name as given in Open Development web.xml. Click Next.
- JNDI Name Should be like jdbc/<Schema-Name>




Schema Name is same added while adding environment details.

The screenshot shows the Oracle WebLogic Server Administration Console. The main window is titled 'Create a New JDBC Data Source - base_domain - WLS Console - Windows Internet Explorer'. The console displays the 'Create a New JDBC Data Source' wizard. The 'Name' field is set to 'RAD11' and the 'JNDI Name' field is set to 'jdbc/RAD11DEV'. The 'Database Type' is 'Oracle' and the 'Database Driver' is 'Oracle's Driver (Thin XA) for instance connections. Versions 9.0.1.9.2.0.10.11'. The 'Next' button is highlighted with a red circle.

7.3.4 Step 4

Click Next

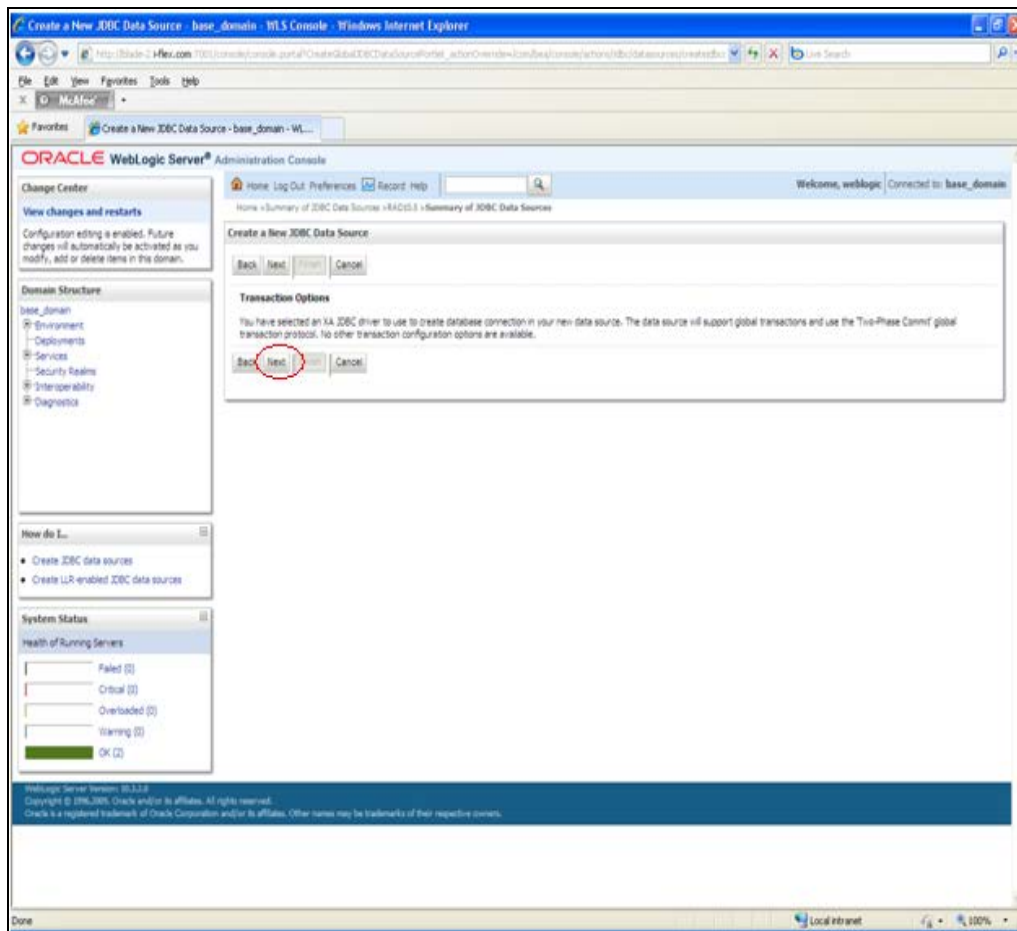

7.3.5 Step 5

Fill in the Marked Fields in Connection Properties. Click Next

7.3.6 Step 6

Click on Test Configuration to test if connection is being made to the data source. Click next.

Oracle Data Source Configuration Wizard

Driver Class Name:

What is the URL of the database to connect to? The format of the URL varies by JDBC driver.

URL:

What database account user name do you want to use to create database connections?

Database User Name:

What is the database account password to use to create database connections?

(Note: For secure password management, enter the password in the Password field instead of the Properties field below)

Password:

Confirm Password:

What are the properties to pass to the JDBC driver when creating database connections?

Properties:

What table name or SQL statement would you like to use to test database connections?


Test Table Name:

Test Configuration Back Next Finish Cancel

WebLogic Server Version 10.3.2.0
Copyright © 1996-2009, Oracle and/or its affiliates. All rights reserved.
Oracle is a registered trademark of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

7.3.7 Step 7

Choose a Target where you wish to deploy the new Data source and Click Finish.

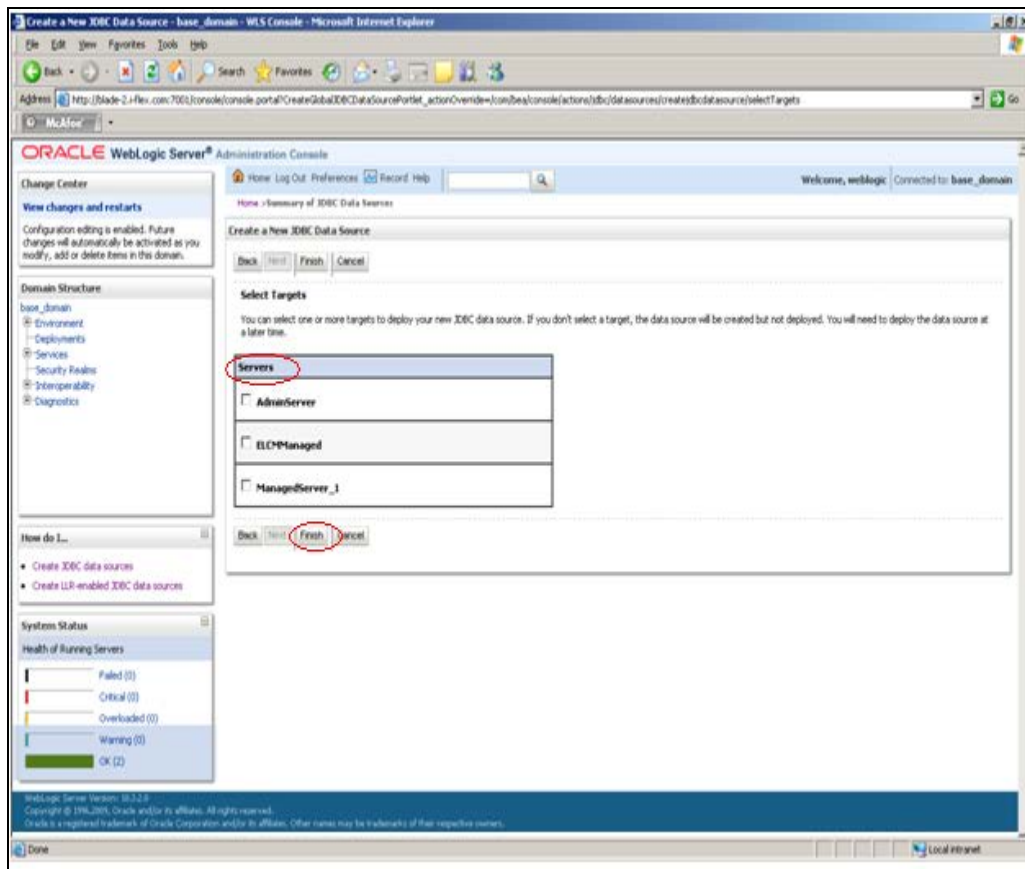

7.3.8 Step 8

This completes the creation of Datasources. Now to deploy the War file click on Deployments under Domain Structure.

The screenshot shows the Oracle WebLogic Server Administration Console. On the left, the 'Domain Structure' tree has 'Deployments' highlighted with a red circle. The main content area is titled 'Summary of JDBC Data Sources'. It includes a message: 'All changes have been activated. No restarts are necessary.' Below this is a table of data sources.

Name	JDBC Name	Targets
☐ jdbcSchedulerDS	jdbc/jdbcSchedulerDS	ManagedServer_1
☐ PCUBS11.1	jdbc/jdbcDS11	ManagedServer_1
☐ HPC	jdbc/jdbcDS	EDManaged
☐ RAD10.S	jdbc/PCCODEV	ManagedServer_1
☒ RAD11	jdbc/PC11CODEV	

At the bottom of the table, there is a button labeled 'Select RAD11'.

7.3.9 Step 9


To install a new application or module for deployment click the Install button.

The screenshot shows the Oracle WebLogic Server Administration Console. The main content area is titled "Summary of Deployments" and includes a "Control" tab. Below the tab, there is a table of deployments. The "Install" button is circled in red. The table lists four deployments: "WLOD1001", "PCJAD1001_5", "PCJAD1001", and "WebManager". The "State" column shows "New", "Active", "Active", and "Active" respectively. The "Health" column shows "OK", "OK", "OK", and "OK". The "Type" column shows "Enterprise Application", "Web Application", "Enterprise Application", and "Web Application". The "Deployment Order" column shows "100", "100", "100", and "100".

Name	State	Health	Type	Deployment Order
WLOD1001	New		Enterprise Application	100
PCJAD1001_5	Active	OK	Web Application	100
PCJAD1001	Active	OK	Enterprise Application	100
WebManager	Active	OK	Web Application	100


7.3.10 Step 10

The Open Development war file first needs to be uploaded to weblogic local machine. Click on upload your file(s) hyperlink.

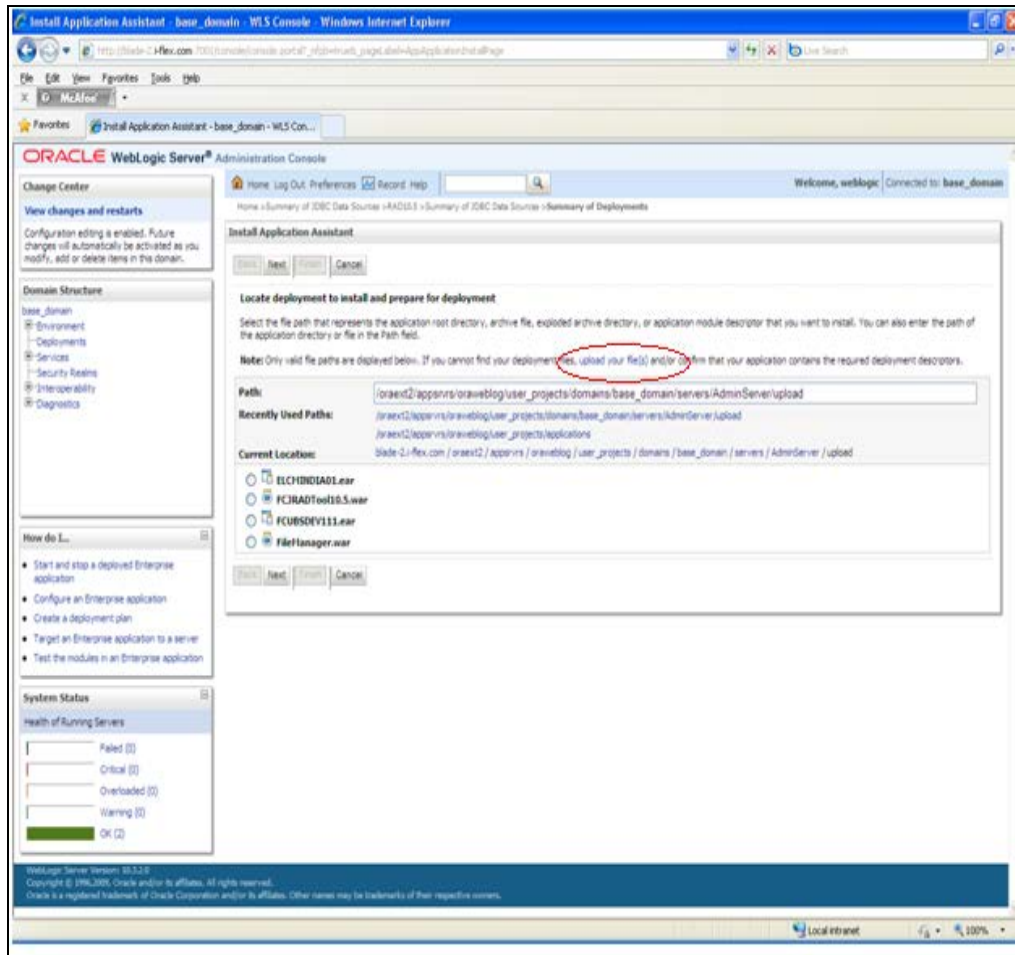


7.3.11 Step 11

Choose the deployment archive by click on Browse Button. Skip the optional step of uploading a deployment plan. Click Next.

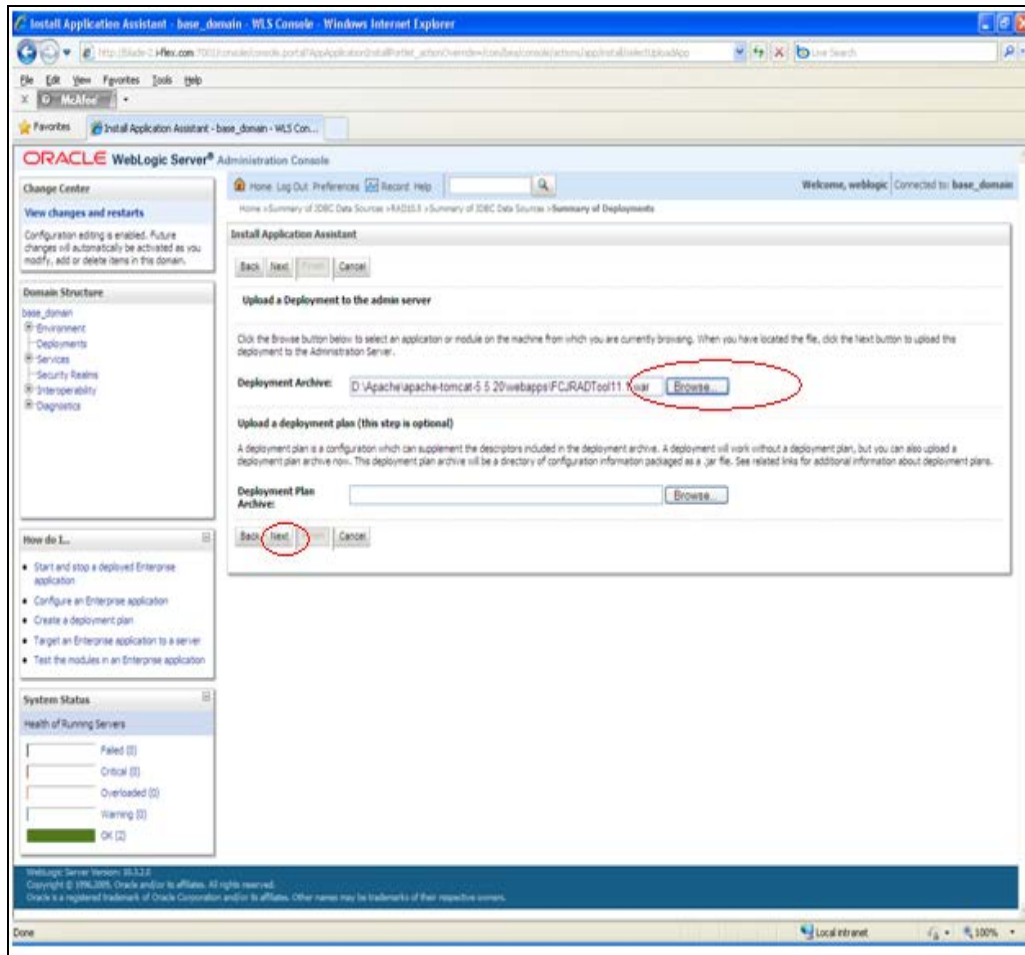


7.3.12 Step 12

Click Next

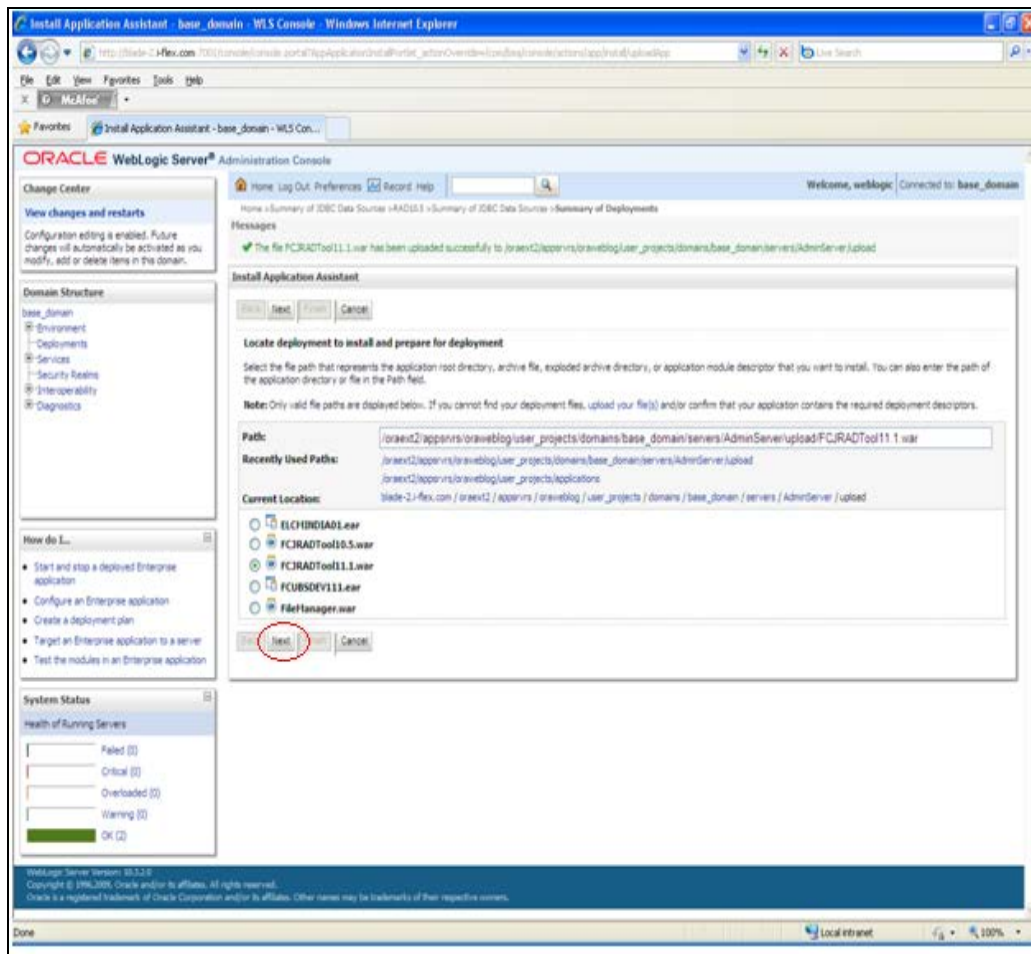


7.3.13 Step 13

Choose the option Install the deployment as an application and Click on Next.

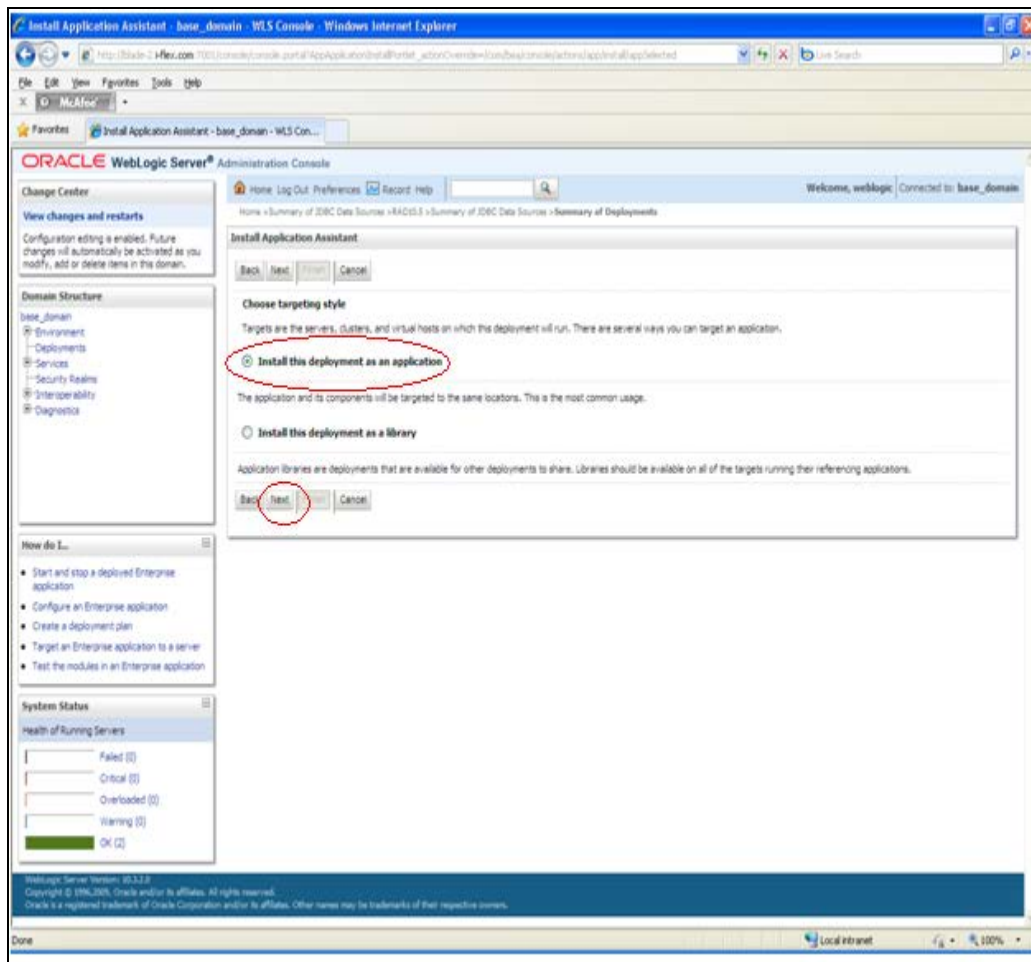


7.3.14 Step 14

Choose the target server where the deployment will be located and Click on Next.

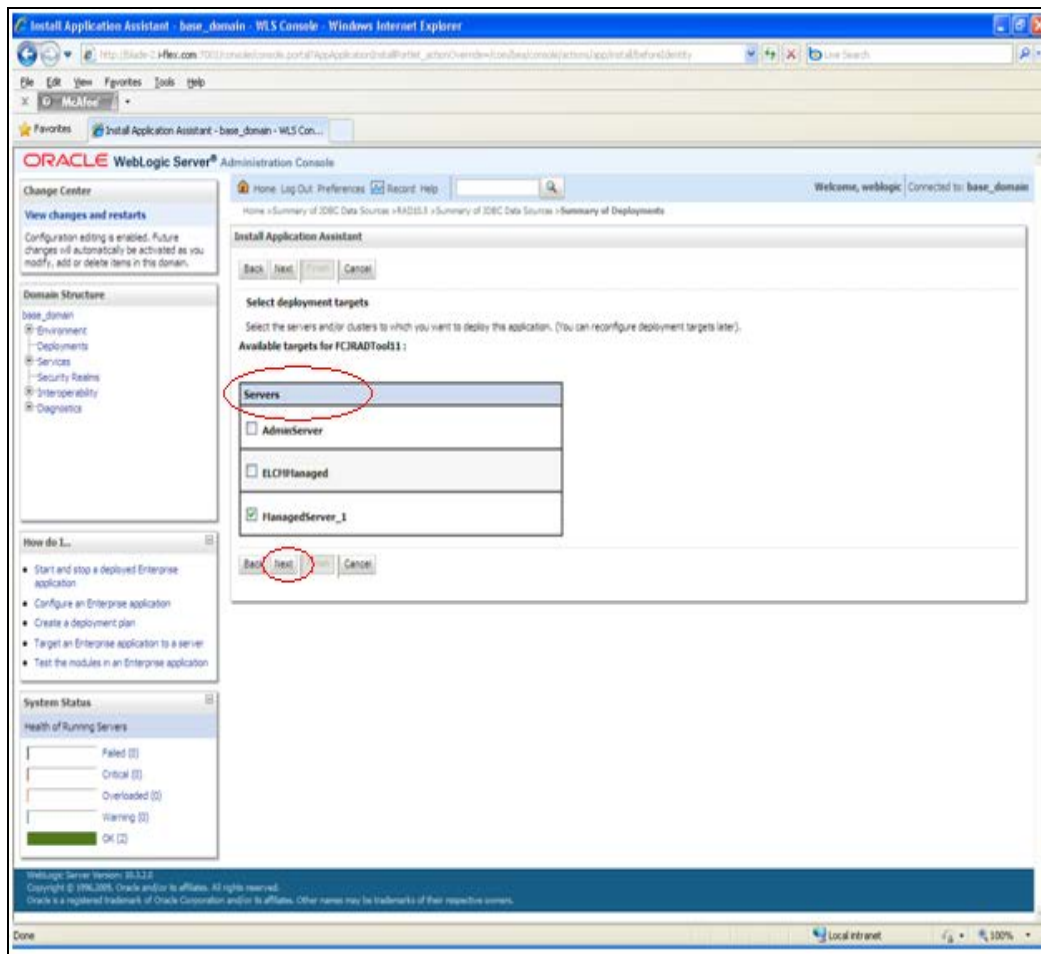

7.3.15 Step 15

Click Next.

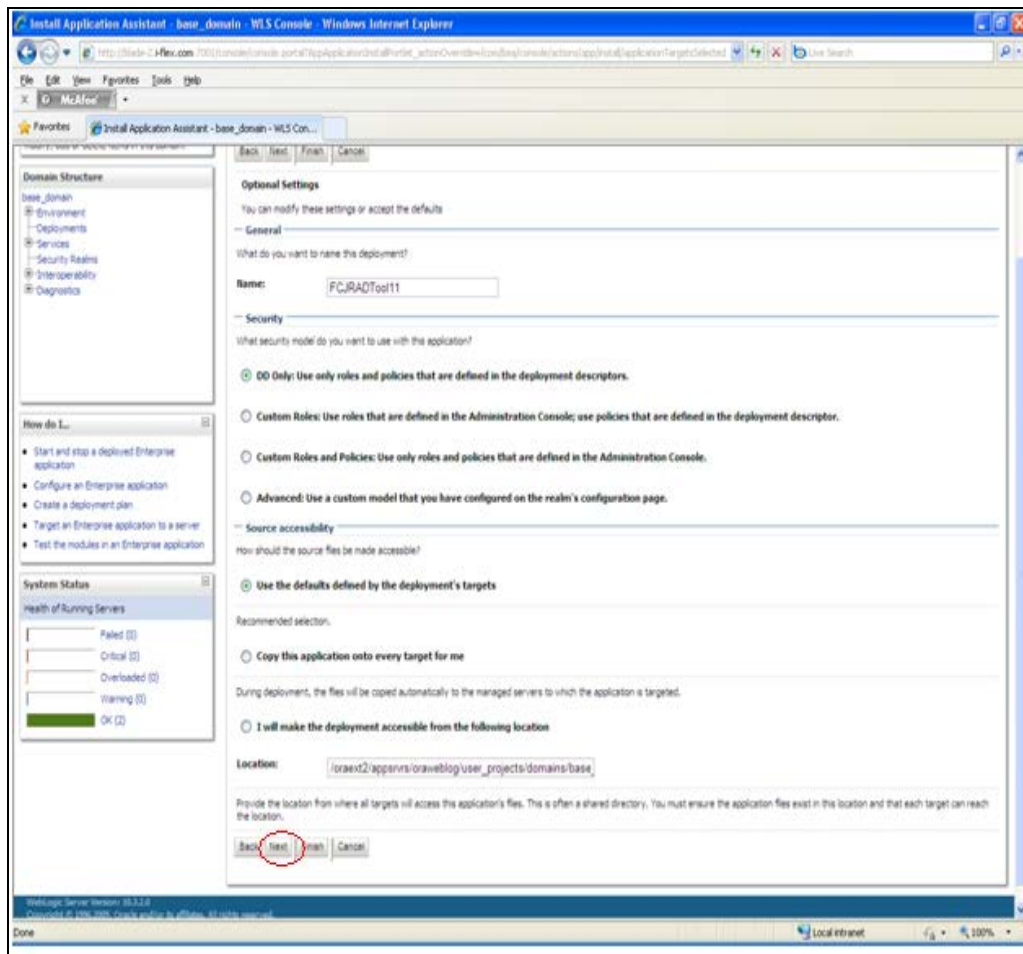

7.3.16 Step 16

This completes the deployment of War File. The Open Development Deployment will now be seen under the list of Deployments. Click on the Hyperlink marked in Red.


The screenshot shows the Oracle WebLogic Server Administration Console. The main content area is titled "Summary of Deployments" and includes a "Control" tab. Below this, there is a "Deployments" table with the following data:

Name	State	Health	Type	Deployment Order
WLSCHDICA01	New		Enterprise Application	200
WLSCHDICA01_5	Active	OK	Web Application	200
WLSCHDICA01_11	Active	OK	Web Application	200
WLSCHDICA01_111	Active	OK	Enterprise Application	200
WLSCHDICA01_1111	Active	OK	Web Application	200

The entry "WLSCHDICA01_11" is circled in red. The left sidebar contains navigation links for "Change Center", "Domain Structure", "How do I...", and "System Status". The bottom status bar shows "Local intranet" and "100%".

7.3.17 Step 17

Go to the Testing Tab.

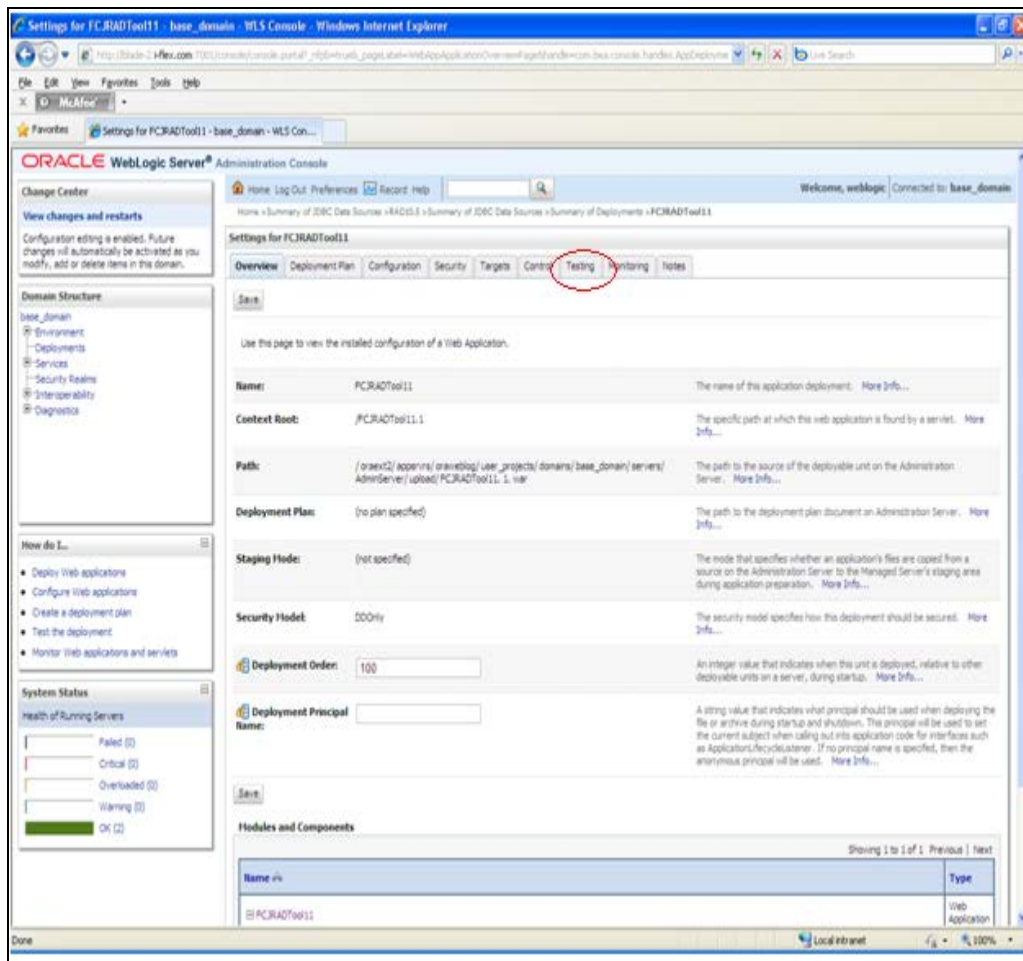

7.3.18 Step 18

The Deployment of Open Development on Weblogic Server has been finished and you may launch the application by the link mentioned below.


The screenshot shows the Oracle WebLogic Server Administration Console. The main content area displays the 'Settings for PCRADTool11' page, with the 'Testing' tab selected. The 'Deployment Tests' section shows a table with the following data:


Name	Test Point	Comments
PCRADTool11		
default	http://10.104.74.104:9001/PCRADTool11	Default url on server ManagedServer_1
index.html	http://10.104.74.104:9001/PCRADTool11/index.html	Welcome file index.html on server ManagedServer_1

The 'Test Point' for the 'default' test is circled in red. The left sidebar contains navigation links for 'Change Center', 'Domain Structure', 'How do I...', and 'System Status'. The bottom status bar indicates 'WebLogic Server Version: 10.3.2.0' and 'Copyright © 1996, 2005, Oracle and/or its affiliates. All rights reserved.'


8. IE Settings

- Open Internet Explorer click on Tools → Internet Options → Security (Tab) → Internet → Custom Level

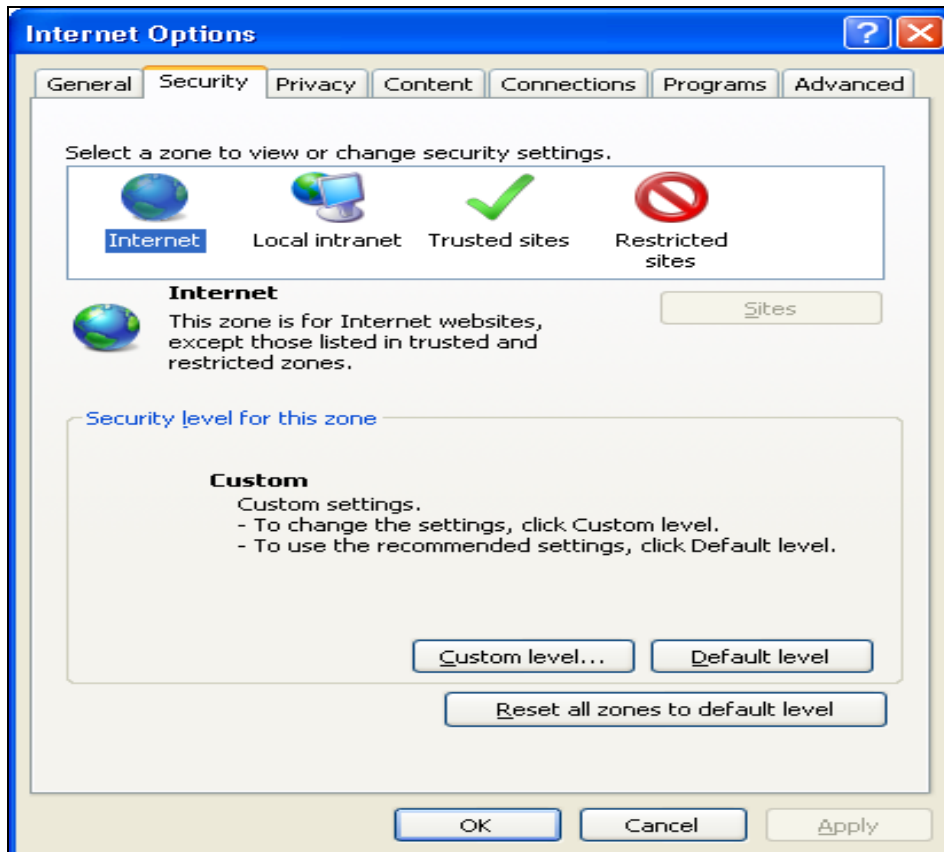

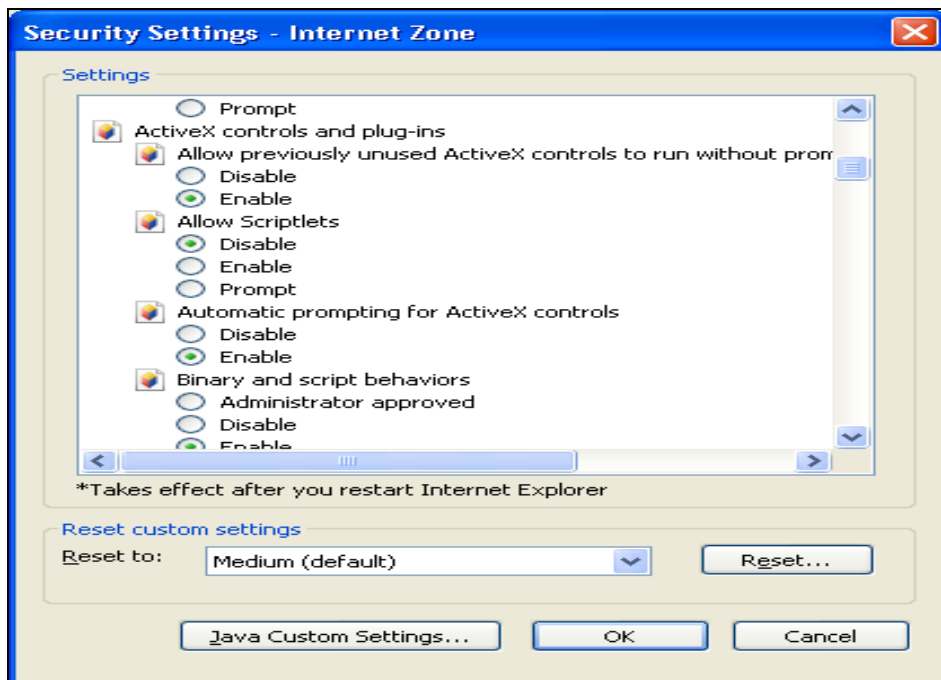

- Enable all the Options, select custom for Java Permissions
- Click on Java Custom Settings

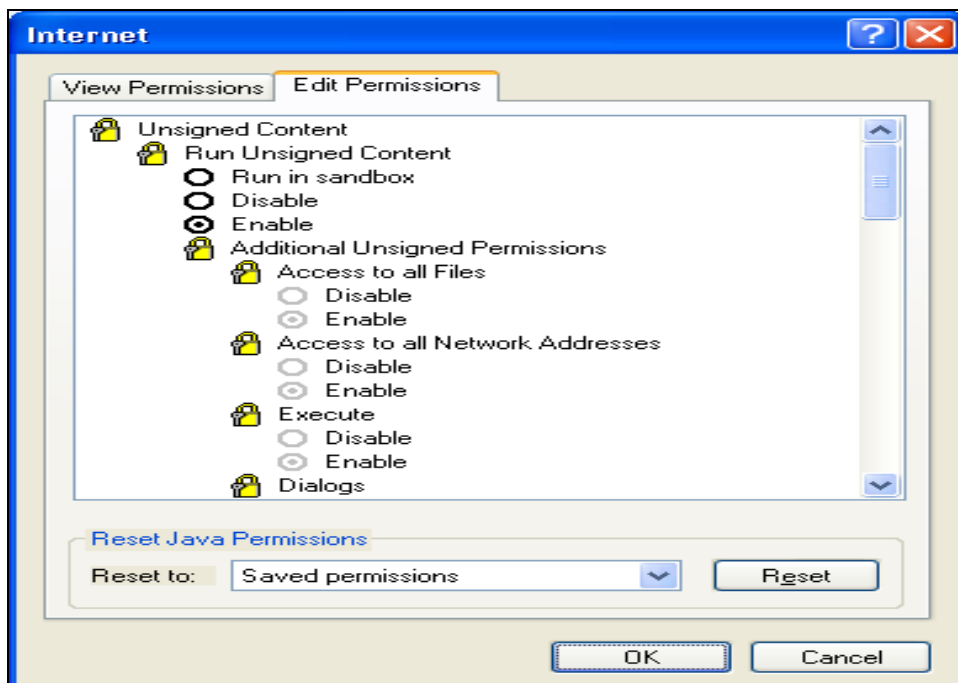

- Select Edit Permissions Tab.
- Select Enable Option for Run Unsigned Content and Run Signed Content.
- Same Settings For Local Intranet



Click on Custom Level select Enable for all Options, for Java Permissions it should be custom.

9. Administration

9.1 User Roles

Open Development Tool has the below User Roles for controlling the access rights:

- System Administrator
- Release Administrator
- Developer

Users will be allowed to perform various tasks based on the “Role” assigned to the user. Users can have different Roles for different Releases. However, System Administrator Role is not at a Release Level and is only for Open Development Tool Administration.

9.1.1 System Administrator

This Role is only meant for the Open Development Team and Users with this Role will have full control over the system. Users with this Role only would be able to create New Releases in Open Development Tool.

Login Open Development tool with RADTOOL as user Name and RADTOOL as Password

9.1.2 Release Administrator


This Role is meant for Project Leaders and Team leaders and allows them to Release administration. Users with this role would be allowed to perform the below tasks

- Creation of Environment(s) for the Release
- Creation of users
- Provide access to the Release for required Users

9.1.3 Developer

This Role is for Developers and Users with role would be able to access the Function development related features of the Open Development tool.

User will also be able to Switch Between releases and Environments Using the “Set Release” Option.

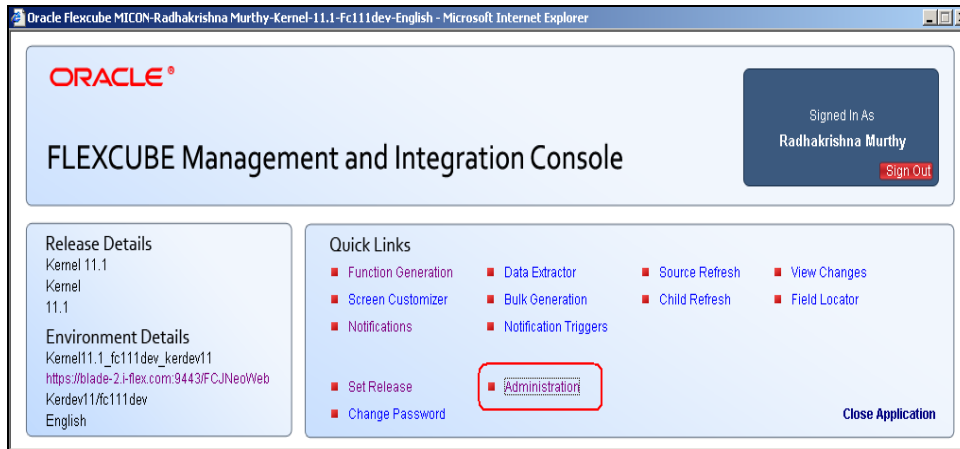

9.2 Release Definition

Every Release needs to be maintained in Open Development Tool. Below details need to be maintained in Open Development Tool before starting any New Release

- Release Code : A unique Code which would identify the release E.g. FCUBSKERNEL11.1
- Release Description : Brief Description of the Release
- Release Type : Kernel/Cluster/Custom



Create the Release with Custom type for extensibility environment

- Release Number: Release Number e.g. .11.1
- A release can have multiple environments for various activities like Development, Unit Testing, and Support etc.
- Release Creation can only be done by Open Development Team and a request with the above details needs to be sent to the Open Development Team in the beginning of every Release. Open Development team would create a release and grants “Release Administrator” Role to the Requester. Release administrator then can provide access to this Particular release for the developers.
- Release administrator will be able to create Environment(s) for this Release. Release administrator can also create New Users if required and can provide them the access to this Release.

The screenshot displays the Oracle Flexcube MICON Admin Details web application. The browser window title is "Oracle Flexcube MICON - Admin Details - Admin Default -- English -- Webpage Dialog". The Oracle logo is visible in the top left corner. On the left side, there is a navigation tree with the following items: User, Environment, Release (selected), Detail, and Summary. The main content area is titled "Release Details" and contains the following information:

- * Release Code:** FC_UBS_V.UM_11.2.CU.0.0.0.0
- Release Description:** FC_UBS_V.UM_11.2.CU.0.0.0.0 Test Customer R
- Release Type:** Custom (dropdown menu)
- Release No:** 1
- Remarks:** Customer Test release base on 11.2
- Release SPC:** B Anandan

The bottom of the screen shows the Windows taskbar with the start button, several application icons, a search bar, and the system clock displaying 4:06 PM.

Create the User and assign Release Admin role for a release that created

The screenshot shows the Oracle Flexcube MICON Admin Details page. The left sidebar contains a tree view with 'User' selected, which has sub-items 'Detail', 'Summary', 'Environment', and 'Release'. The main area is titled 'User Maintenance' and contains an 'Upload From Excel' button. Below this, the user details for 'ANANDAN' are displayed: User ID (ANANDAN), User Name (B Anandan), Default Release (_V.UM_11.2.CU.0.0.0.0), Default Environment, User Password (masked), and User Status (Enabled). A table below shows the user's role for the selected release:

Release Code	User Role
FC_UBS_V.UM_11.2.CU.0.0.0.0	Release Admin

9.3 Environment Creation

Open Development Tool requires at least one environment for each release and the below environment details need to be maintained in Open Development Tool for each environment

- Data Base Details
 - Instance Name
 - Port Number
 - Schema Name
 - Password
- Application Server Details
 - Target FLEXCUBE IS Application URL
 - Target FLEXCUBE IS JS Path
 - Target FLEXCUBE IS UIXML Path
- Server Password and user id in case the App server is on Unix

The screenshot shows the 'Oracle Flexcube MICON- Admin Details- Admin-Default--English -- Webpage Dialog' window. The 'Environment Master Details' tab is active, displaying a 'Save' button and various configuration fields. The left sidebar shows a tree view with 'User', 'Environment', and 'Release' categories, each with 'Detail' and 'Summary' sub-items. The main area contains the following fields:

Environment Master Details	
* Environment Code	I_11.2.CU.0.0.0_DEV
Release Code	_V.UM_11.2.CU.0.0.0.0
Environment Name	I_11.2.CU.0.0.0_DEV
Language Code	ENG
Database Instance	ORCLNEW
Database Port	1521
Database Name	FCUBS112N
JNDI Name	jdbcfcddevDS
Database HostName	localhost
Database IP Address	localhost
Database Password	*****
Application Name	FCUBS11.2
Application URL	com:7001/FCJNeoWeb
Application IP Address	localhost
Application Operating System	Windows
Application Transfer Type	File Copy
JS Directory Path	12\yv1aao\lwan\ScriptUS
UIXML Directory Path	3112\yv1aao\lwan\UIXML
Server Username	
Server Password	
Server Filemanager URL	
Filemanager Username	
Filemanager Password	

9.3.1 User Definition

New users can be created by System Administrators and Release administrators.

- User Id
- Password
- Default Release
- Default Environment
- User Releases
 - Releases for which the user needs access should be given here
 - One user can have access to multiple Release with one of those Release as the default release
 - User Role for each of these Releases.

Oracle Flexcube MICON- Admin Details- Radhakrishna Murthy- Kernel-11.1-Fc111dev-English -- Web Page Dialog

ORACLE

User Maintenance

Upload From Excel

* User ID: RADHAKRISHNAM User Name: Radhakrishna Murthy

Default Release: FCUBSKERNEL11.1 Default Environment: KERNEL11.1_FC111D

User Password: User Status: Enabled


*Release Code	User Role
FCUBSKERNEL11.0_FCCDEV	Developer
FCUBSKERNEL11.0_TESTING	Developer
FCUBSKERNEL11.1	Release Admin

10. Developer Check List

As Open Development tool identifies the Release parameters and accordingly generates the output, it is important to ensure the correct release before using the Tool.

Open Development Tool also reads several tables from FLEXCUBE schema, Developers should ensure the correctness of the environment they are currently connected to.

The Landing page of Open Development Tool has both Release details and environment details as shown below

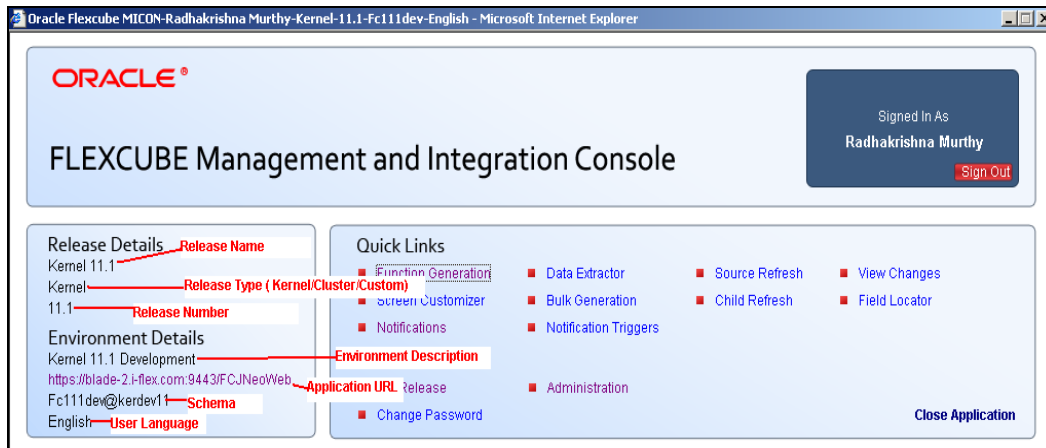



Installation and Setup Guide
[October] [2015]
Version 12.1.0.0.0

Oracle Financial Services Software Limited
Oracle Park
Off Western Express Highway
Goregaon (East)
Mumbai, Maharashtra 400 063
India

Worldwide Inquiries:
Phone: +91 22 6718 3000
Fax: +91 22 6718 3001
www.oracle.com/financialservices/

Copyright © [2007], [2015], Oracle and/or its affiliates. All rights reserved.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate failsafe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

This software or hardware and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.