

Security User Guide

Oracle FLEXCUBE Investor Servicing

Release 12.1.0.9.0

Part Number E67272-01

September 2020

Security User Guide
September 2020
Oracle Financial Services Software Limited

Oracle Park

Off Western Express Highway
Goregaon (East)
Mumbai, Maharashtra 400 063
India
Worldwide Inquiries:
Phone: +91 22 6718 3000
Fax:+91 22 6718 3001
www.oracle.com/financialservices/

Copyright © 2007, 2020, Oracle and/or its affiliates. All rights reserved.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate failsafe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

This software or hardware and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

Table of Contents

1.	About This Manual	1-1
1.1	Introduction.....	1-1
1.2	Related Documents.....	1-1
1.3	Audience.....	1-1
1.4	Organization	1-1
1.5	Conventions Used in this Manual.....	1-1
	1.5.1 General Conventions.....	1-2
	1.5.2 Keyboard Conventions	1-2
1.6	Glossary of Icons.....	1-2
1.7	Abbreviations and Acronyms.....	1-2
1.8	Getting Help.....	1-3
2.	Ensuring Security for Fund Manager	2-1
2.1	Security Management.....	2-1
2.2	Some Important Terms.....	2-2
2.3	Other Features of Security Management System	2-3
	2.3.1 Restricted Number of Unsuccessful Attempts.....	2-3
	2.3.2 Restricted Access to Branches.....	2-3
	2.3.3 Restricted Access to AMC Branches.....	2-3
	2.3.4 All Activities Tracked	2-3
2.4	Role Profiles	2-3
	2.4.1 Defining Role Profiles	2-4
	2.4.2 Classifying Role Profile.....	2-6
	2.4.3 Copying Role Profile of Existing Role.....	2-6
	2.4.4 Deleting Role Profile.....	2-6
	2.4.5 Retrieving Role Profile in Role Definition Screen	2-7
	2.4.6 Authorizing Role Profile	2-7
	2.4.7 Editing Role Profile	2-8
2.5	User Profile.....	2-8
	2.5.1 Defining User Profile.....	2-8
	2.5.2 Restrictive Passwords Button.....	2-14
	2.5.3 Roles Button	2-16
	2.5.4 Functions Button.....	2-17
	2.5.5 Branches Button.....	2-19
	2.5.6 Modules Button.....	2-20
	2.5.7 Disallowed Functions Button	2-20
	2.5.8 Dashboard Mapping Button.....	2-22
	2.5.9 Allowing User to Operate from Different Branches.....	2-23
	2.5.10 Copying User Profile of Existing User	2-24
	2.5.11 Deleting User Profile.....	2-25
	2.5.12 Retrieving User Profile in User Profile Definition screen	2-26
	2.5.13 Authorizing User Profile.....	2-26
	2.5.14 Editing User Profile.....	2-27
2.6	Hot Key Maintenance	2-30
	2.6.1 Maintaining Hot Keys.....	2-31
2.7	Clearing Users.....	2-33
	2.7.1 Clearing User that has Exited System Abnormally.....	2-33

2.8	SMS Parameters	2-34
2.8.1	Setting up SMS Parameters	2-34
2.9	User Details Modification in Bulk	2-37
2.9.1	Modifying User Details in Bulk	2-38
2.10	User Credentials Change Summary	2-39
2.10.1	Retrieving a Record in User Credentials Change Summary Screen	2-39
2.10.2	Editing User Credentials Change Record	2-41
2.10.3	Viewing User Credentials Change Record	2-41
2.10.4	Deleting User Credentials Change Record	2-41
2.10.5	Authorizing User Credentials Change Record	2-42
2.10.6	Amending User Credentials Change Record	2-42
2.10.7	Authorizing Amended User Credentials Change Record	2-42
2.11	Modules	2-42
2.11.1	Setting up Modules	2-42
2.11.2	Operations on Module Record	2-44
2.12	Printer Maintenance	2-44
2.12.1	Invoking Printer Maintenance Screen	2-45
2.12.2	Operations on Printing a Record	2-45
2.13	Row Level Security Maintenance	2-46
2.13.1	Invoking Row Level Security Maintenance Screen	2-46
3.	Ensuring Security for Agency Branch	3-1
3.1	Security Management	3-1
3.2	Some Important Terms	3-2
3.3	Other Features of Security Management System	3-2
3.3.1	Restricted Number of Unsuccessful Attempts	3-3
3.3.2	Restricted Access to Branches	3-3
3.3.3	Restricted Access to AMC Branches	3-3
3.3.4	Restricted Access to Unit Holder Information	3-3
3.3.5	All Activities Tracked	3-4
3.4	User Role	3-4
3.4.1	Procedure for Defining Role Profiles	3-4
3.4.2	Classifying Role Profile	3-6
3.4.3	Copying Role Profile	3-6
3.4.4	Deleting Role Profile	3-7
3.4.5	Authorizing Role Profile	3-8
3.4.6	Editing Role Profile	3-8
3.5	User Profile	3-8
3.5.1	Defining User Profile	3-9
3.5.2	Maintaining User Admin Details	3-9
3.5.3	Classifying User	3-13
3.5.4	Interfacing with External Systems for Authentication	3-13
3.5.5	Allowing User to Operate from Different Branches	3-13
3.5.6	Roles Button	3-14
3.5.7	Functions Button	3-15
3.5.8	Branches Button	3-17
3.5.9	Restrictive Passwords Button	3-18
3.5.10	Module Button	3-19
3.5.11	Disallowed Functions Button	3-19
3.5.12	Other Attributes for User Profile	3-20
3.5.13	Copying User Profile of Existing User	3-20

3.5.14	<i>Deleting User Profile</i>	3-21
3.5.15	<i>Authorizing User Profile</i>	3-21
3.5.16	<i>Editing User Profile</i>	3-22
3.6	Clearing User.....	3-23
3.6.1	<i>Clearing User That Has Exited</i>	3-23
3.7	Auto Authorization.....	3-24
3.7.1	<i>Auto-authorization Features in System</i>	3-24
3.7.2	<i>Using Auto-authorization Feature</i>	3-25
3.7.3	<i>Auto Auth Maintenance Screen</i>	3-25
3.7.4	<i>Enabling Or Disabling Auto-Authorization User Group</i>	3-25
3.7.5	<i>Operations on Auto Authorization Records</i>	3-28
4.	Enabling Auto Authorization	4-1
4.1	Normal Process of Authorization in System.....	4-1
4.2	Auto-authorization.....	4-1
4.2.1	<i>Auto-authorization Features in System</i>	4-1
4.2.2	<i>Using Auto-authorization Feature</i>	4-2
4.2.3	<i>Operations on Auto Authorization Records</i>	4-8
5.	External System Maintenance	5-1
5.1	External System.....	5-1
5.1.1	<i>Maintaining External System</i>	5-1
5.2	External System Details.....	5-4
5.2.1	<i>Retrieving External System Details</i>	5-5
5.2.2	<i>Viewing External System Details</i>	5-5
5.2.3	<i>Deleting External System Details</i>	5-6
5.2.4	<i>Modifying External System Details</i>	5-6
5.2.5	<i>Authorizing External System Details</i>	5-6
5.3	External System Functions.....	5-6
5.3.1	<i>Maintaining External System Functions</i>	5-7
5.4	External System Details.....	5-8
5.4.1	<i>Retrieving External System Details</i>	5-8
5.4.2	<i>Viewing External System Functions Details</i>	5-9
5.4.3	<i>Deleting External System Functions Details</i>	5-9
5.4.4	<i>Modifying External System Function Details</i>	5-9
5.4.5	<i>Authorizing External System Function Details</i>	5-10
5.5	Message Media.....	5-10
5.5.1	<i>Maintaining Message Media</i>	5-10
5.6	Message Media Details.....	5-12
5.6.1	<i>Retrieving Message Media Details</i>	5-13
5.6.2	<i>Viewing Message Media Details</i>	5-13
5.6.3	<i>Deleting Message Media Details</i>	5-14
5.6.4	<i>Modifying Message Media Details</i>	5-14
5.6.5	<i>Authorizing Message Media Details</i>	5-14
5.7	Media Control System.....	5-14
5.7.1	<i>Maintaining Media Control System</i>	5-15
5.8	Media Control System Details.....	5-17
5.8.1	<i>Retrieving Media Control System Details</i>	5-18
5.8.2	<i>Viewing Media Control System Details</i>	5-18
5.8.3	<i>Deleting Media Control System Details</i>	5-19
5.8.4	<i>Modifying Media Control System Details</i>	5-19
5.8.5	<i>Authorizing Media Control System Details</i>	5-19

5.9	Amendment Details	5-19
5.9.1	<i>Maintaining Amendment Details</i>	5-20
5.10	Amendment Details Retrieval	5-21
5.10.1	<i>Retrieving Amendment Details</i>	5-21
5.10.2	<i>Viewing Amendment Details</i>	5-22
5.10.3	<i>Deleting Amendment Details</i>	5-23
5.10.4	<i>Modifying Amendment Details</i>	5-23
5.10.5	<i>Authorizing Amendment Details</i>	5-23
5.11	Events Log	5-23
5.11.1	<i>Invoking Events Log Screen</i>	5-24
5.12	Events Log	5-24
5.12.1	<i>Invoking Events Log Screen</i>	5-25
5.13	Integration Parameter Maintenance Screen	5-25
5.13.1	<i>Invoking Integration Parameter Maintenance Screen</i>	5-26
5.14	Upload Source Maintenance	5-29
5.14.1	<i>Invoking Upload Source Maintenance Screen</i>	5-29
5.15	Source Preferences Maintenance	5-30
5.15.1	<i>Invoking Source Preferences Maintenance Screen</i>	5-30
5.15.2	<i>Function ID Preferences Button</i>	5-32
5.16	Notification Enroute Maintenance	5-33
5.16.1	<i>Invoking Notification Enroute Maintenance Screen</i>	5-34
6.	Tanking of Maintenance Records	6-1
6.1	Tanking New and Modified Maintenance Records	6-1
6.1.1	<i>Enabling Tanking of Maintenance Records</i>	6-1
6.1.2	<i>Tanking New Records</i>	6-4
6.1.3	<i>Tanking Modified Records</i>	6-4
6.1.4	<i>Closing a Record</i>	6-4
6.1.5	<i>Re-opening a Record</i>	6-5
6.1.6	<i>Authorizing a Record</i>	6-5
6.1.7	<i>Deleting a Record</i>	6-5
6.1.8	<i>Viewing Summary of Records</i>	6-5
6.1.9	<i>Modifying Tanking Preferences</i>	6-5
7.	Function ID Glossary	7-1

1. About This Manual

1.1 Introduction

Welcome to Oracle FLEXCUBE Investor Servicing™, a comprehensive mutual funds automation software from Oracle Financial Servicing Software Ltd. ©.

This Oracle FLEXCUBE Investor Servicing User Manual helps you use the system to achieve optimum automation of all your mutual fund investor servicing processes. It contains guidelines for specific tasks, descriptions of various features and processes in the system and general information.

1.2 Related Documents

The User Manual is organized in to various parts, each discussing a component of the Oracle FLEXCUBE Investor Servicing system.

1.3 Audience

This Fund Manager User Manual is intended for the Fund Administrator users and system operators in the AMC.

1.4 Organization

This volume of the Fund Manager User manual is organized under the following chapter sequence:

Chapter	Description
Chapter 1	<i>About This Manual</i> explains the structure, audience, organization, and related documents of this manual.
Chapter 2	<i>Security – Ensuring Security</i> explains how to use the system as an authorized user and also manage the other users that can access the system.
Chapter 3	<i>Security – Enabling Auto Authorization</i> explains why authorization is required and how to enable auto authorization and its features.

1.5 Conventions Used in this Manual

Before you begin using this User Manual, it is important to understand the typographical conventions used in it.

1.5.1 General Conventions





Convention	Type of Information
<i>Italic type</i>	Functional /foreign terms Validations for fields on a screen References to related Headings/Users Manuals For emphasis
Numbered Bullet	Step by step procedures

1.5.2 Keyboard Conventions

Convention	Type of Information
Keys	All keys of the keyboard are represented in capital letters. For example, <CTRL>.
Shortcut keys	All short cut keys are contained in brackets. For example, <ALT+SHIFT>.

1.6 Glossary of Icons

This User Manual may refer to all or some of the following icons.

Icons	Function
	Exit
	Add Row
	Delete Row
	Option List

Refer the Procedures User Manual for further details about the icons.

1.7 Abbreviations and Acronyms

The following acronyms and abbreviations are adhered to in this User Manual:

Abbreviation/ Acronym	Meaning
ADMIN	User Administrator
AGY	The Agency Branch component of the system
AMC	Asset Management Company
BOD	Beginning of Day
CDSC	Contingent Deferred Sales Charge

Abbreviation/ Acronym	Meaning
CGT	Capital Gains Tax
CIF	Customer Information File
EOD	End of Day
EPU	Earnings per unit
FC-IS	Oracle FLEXCUBE Investor Servicing
FMG	The Fund Manager component of the system
FPADMIN	Oracle FLEXCUBE Administrator
ID	Identification
IHPP	Inflation Hedged Pension Plan
IPO	Initial Public Offering
LEP	Life and Endowment Products
LOI	Letter of Intent
NAV	Net Asset Value
REG	The Registrar component of the system
ROA	Rights of Accumulation
ROI	Return on Investment
SI	Standing Instructions
SMS	Security Management System
URL	Uniform Resource Locator
VAT	Value Added Tax
WAUC	Weighted Average Unit Cost

1.8 Getting Help

Online help is available for all tasks. You can get help for any function by clicking the help icon provided or by pressing F1.

2. Ensuring Security for Fund Manager

In any financial environment, security of information is of paramount importance. Access to information must be made available in a carefully monitored manner. Controlling and maintaining these aspects also includes management of the people (or users) who will process this information on a day to day basis. Therefore, an efficient Security Management System is an important factor that will determine the strength and stability of a financial system.

This chapter takes you through the Security Maintenance features of the Oracle FLEXCUBE system. You will learn how to use the security features in the system to suit your requirements and customize them for your environment.

This chapter is intended for the following persons in your bank or AMC:

Person	Operation
Oracle FLEXCUBE Implementers	To set up the initial start-up parameters in the individual client workstations. To set up security management parameters for the AMC or AMC branch.
SMS Administrator for the Bank/ AMC	To set the SMS AMC or AMC branch parameters. To identify the Branch level SMS Administrators.
SMS Administrator for the Branch	To create User and Role profiles for the branches of your AMC. Will also grant access to the various functions to the Users.
A Oracle FLEXCUBE user	Any user of Oracle FLEXCUBE whose activities are traced by the Security Management System.

This chapter contains the following sections:

- [Section 2.1, "Security Management"](#)
- [Section 2.2, "Some Important Terms"](#)
- [Section 2.3, "Other Features of Security Management System"](#)
- [Section 2.4, "Role Profiles"](#)
- [Section 2.5, "User Profile"](#)
- [Section 2.6, "Hot Key Maintenance"](#)
- [Section 2.7, "Clearing Users"](#)
- [Section 2.8, "SMS Parameters"](#)
- [Section 2.9, "User Details Modification in Bulk"](#)
- [Section 2.11, "Modules"](#)
- [Section 2.12, "Printer Maintenance"](#)
- [Section 2.13, "Row Level Security Maintenance"](#)

2.1 Security Management

In Oracle FLEXCUBE, you can ensure security management at all levels in any kind of environment. This is due to a combination of the following features:

- User-level Access Control

- Business function-level Access Control
- Operation-level Access Control

Simply translated, this means that a person within your environment can:

- Only access the system as an authorized user
- Only access certain allowed functions within the system
- Only perform certain allowed operations on the function for which access is allowed

2.2 **Some Important Terms**

Before you operate the security management system of your Oracle FLEXCUBE installation, you must understand some important terms that you will encounter during the process.

System Administrators

Typically, at the time of installation, two users are created by default in the system database. These two users are the system administrators. The system administrators subsequently create all users and user roles in the system,

The system administrator user profiles would be typically created to enable the security managers in your bank or AMC, to log in to the system.

Functions

A function is any operation related to business maintenance or processing in the system. Most typically, each menu item appearing in the main menu could be thought of as a function. For a user, you can control access to different functions in the system.

Any functions related to the Fund Manager component can be thought of as back office functions, and any functions related to the Agency Branch could be thought of as front office components.

The functions are made available by the Oracle FLEXCUBE implementers, at the time of installation.

User Profile

Each user who will use the system is given a unique profile in the database. This profile is known as a user profile.

The profile of a user contains the User ID, the password and the functions to which the user has access. A user can be assigned access to either back office (Fund Manager) functions, or front office (Agency Branch) functions, depending upon the tasks that the user must perform in your organization.

Roles

It is likely that users working in the same department at the same level of hierarchy need to have similar user profiles. In such cases, you can define a Role Profile, which includes access rights to the functions that are common to a group of users. A user can be linked to a Role Profile by which you give the user access rights to all the functions in the Role Profile.

A role profile could contain either back office (Fund Manager) functions or front office (Agency Branch) functions.

2.3 **Other Features of Security Management System**

This section contains the following topics:

- [Section 2.3.1, "Restricted Number of Unsuccessful Attempts"](#)
- [Section 2.3.2, "Restricted Access to Branches"](#)
- [Section 2.3.3, "Restricted Access to AMC Branches"](#)
- [Section 2.3.4, "All Activities Tracked"](#)

2.3.1 **Restricted Number of Unsuccessful Attempts**

You can define the maximum number of unsuccessful attempts after which a User ID should be disabled. The password of a user can be made applicable only for a fixed period. This forces the user to change the password at regular intervals thus reducing security risks. Further, you can define passwords that could be commonly used by a user as Restrictive Passwords at the user, user role and bank level. A user cannot use any password that is listed as a Restrictive Password at any of these levels.

2.3.2 **Restricted Access to Branches**

You can indicate the branches from where a user can operate. Click on the User Branch Restrictions button in the User Profile Definition screen to define the branches from where a user can operate.

2.3.3 **Restricted Access to AMC Branches**

For mutual fund account customers, you can indicate the branches of the AMC from where a user can operate. Click on the Module button in the User Profile Definition screen to define the branches of the AMC from where a user can be allowed to operate.

2.3.4 **All Activities Tracked**

Extensive log is kept of all the activities on the system. You can generate reports on the usage of the system anytime. These reports give details of unsuccessful attempts at accessing the system along with the nature of these attempts. It could be an unauthorized user attempting to use the system, an authorized user trying to run a function without proper access rights, and so forth.

2.4 **Role Profiles**

This section contains the following topics:

- [Section 2.4.1, "Defining Role Profiles"](#)
- [Section 2.4.2, "Classifying Role Profile"](#)
- [Section 2.4.3, "Copying Role Profile of Existing Role"](#)
- [Section 2.4.4, "Deleting Role Profile"](#)
- [Section 2.4.5, "Retrieving Role Profile in Role Definition Screen"](#)
- [Section 2.4.6, "Authorizing Role Profile"](#)
- [Section 2.4.7, "Editing Role Profile"](#)

2.4.1 Defining Role Profiles

Role profiles are defined in the Role Definition screen. You can invoke the 'Role Definition' screen by typing 'SMDROLDF' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button.

Role Definition

Save

Role Identification* Customer Specific

Description Module IS

Role Functions

Role Function*	NEW	COPY	DELETE	CLOSE	UNLOCK	REOPEN	PRINT	AUTH	REVERSE	ROLLOVER	CONFIRM	LIQUIDATE	HOLD	TEMPLATE	VIEW	G
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Input by _____ DateTime _____ Mod No _____ Open _____

Authorized by _____ DateTime _____ Authorized _____

Cancel

Role Identification

Alphanumeric, Mandatory

Specify a unique identifier for the role profile.

Description

Alphanumeric, Mandatory

This is the key text which describes and qualifies the role profile, and is indicative of its characteristics.

Customer Specific

Optional

Check this box to indicate that the role profile has been set up for a specific customer of your AMC or AMC branch who might access the system from a remote terminal to inquire about their transactions or investor accounts.

Module

Optional

Select the default module for users linked to the role profile.

Role Functions

After you have defined the basic attributes of a role profile (the Role ID, Description, Module and whether it is customer- specific) you should define the functions to which the role profile has access. The various functions in the system fall under five categories, corresponding to the menu options in the Agency Branch main menu.

A role profile could contain either back office (Fund Manager) functions or front office (Agency Branch) functions.

Select the function that you want to link to the role profile.

For each function, you can allow or disallow specific record-level operations. These operations are displayed as a horizontal list, alongside the Maintenance Functions label, with each operation spelled out vertically.

In the selected function row, check the box pertaining to each operation you want to allow for the role profile.

You can allow any of the following operations at record level for the role profile in any function:

2.4.1.1 Static Tables

- New (Define a new record)
- Copy (Copy details of an existing record)
- Delete (Delete an existing record)
- Close (Close an existing record)
- Unlock (to amend an existing record)
- Reopen (Reopen an existing record)
- Print (Print the details of selected records)
- Authorize (Authorize any maintenance activity on a record)
- Reverse (Reverse the details of selected records)
- Rollover
- Confirm
- Liquidate
- Hold
- Template
- View
- Generate

2.4.1.2 Contracts and On-line Transaction Processing

- View (to see the details of the contract).

2.4.1.3 Reports

- Generate (to generate reports).
- View (view the reports).
- Print (print the reports).

To delete the access rights you have specified for a function, select the required Function ID row and check the Delete box at the extreme right end of the row.

To edit the access rights you have specified for a function, select the required Function ID row and check the Edit box at the extreme right end of the row.

2.4.2 Classifying Role Profile

By default, a Role Profile you define will be for the users who are employees of your AMC or AMC branch. You can indicate that the profile is for customers who might login from remote terminals to inquire on their transactions and balances.

2.4.3 Copying Role Profile of Existing Role


Often, you may have to create a Role Profile that closely resembles an existing one. In such a case, you can copy the existing profile on to the new one.

To copy a role, you need to retrieve the record whose attributes you wish to copy. This is done as follows:

- Click the F7 button.
- Input the Role ID.
- Click on F8.

All the details related to the particular Role Id are displayed by the system. Choose the Copy button from the row of buttons at the topmost row of the screen. All the details of the profile except the Role ID will be copied and displayed. Enter a unique Role ID. You can change any of the details of the profile before saving it.

If you have retrieved an existing role profile and you want to copy it to a new role profile, click the Copy button in the topmost row of buttons in the screen. The Copy Information screen is opened, and you can specify the Role ID and Description for the new role profile.

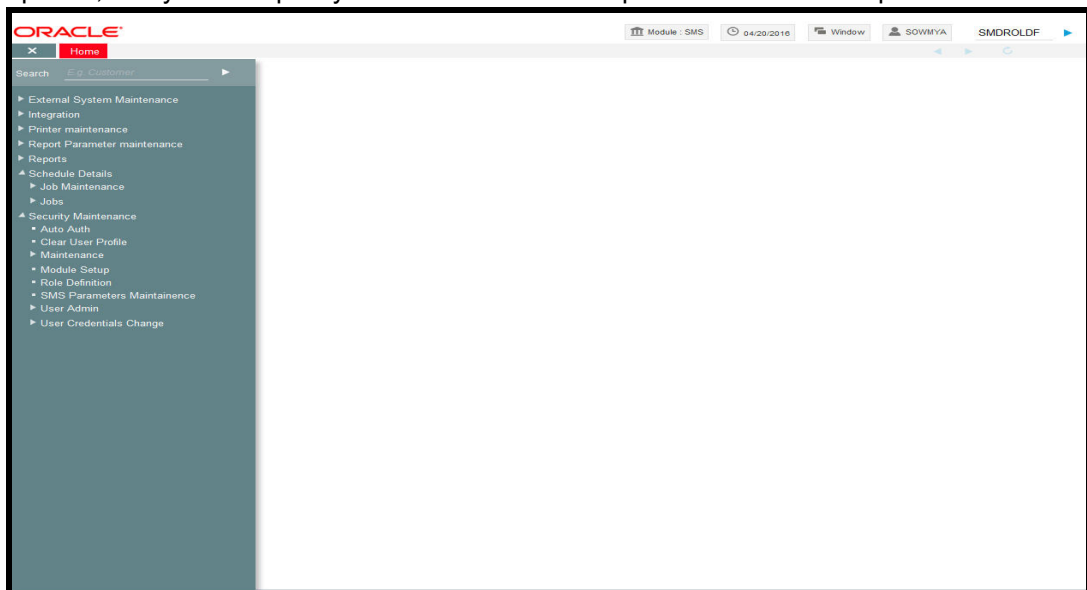

All the details of the existing profile are copied onto the new role profile. Again, you can change any of the details of the profile before saving it.

2.4.4 Deleting Role Profile

A Role Profile should be deleted only if there are no users linked to it. Thus, before deleting a role profile, you should modify each user profile attached to it and delete the link to the role.

To delete an existing role profile, you have to retrieve the record that you wish to delete. This is done as follows:

- Click the F7 button.
- Input the Role ID.
- Click on F8.

All the details related to the particular Role Id are displayed by the system. Then select the Delete button from the topmost row of buttons in the screen. If the role is linked to any user, a warning message will be displayed. This message will bring your attention to the fact that the user profile to which the role is linked will not be the same if the role profile is deleted.

You will be prompted to confirm the deletion. The Role Profile will be deleted only if you confirm the deletion.

2.4.5 Retrieving Role Profile in Role Definition Screen

To retrieve a role profile that you have previously set up in the Role Definition screen, choose the 'Query' button from the topmost row of buttons in the screen. The Query screen is opened.

The screenshot shows the 'Role Definition' window. At the top, there is a title bar 'Role Definition' and a close button. Below it is the 'Execute Query' section. It contains a text input field labeled 'Role Identification *' with a red asterisk, a 'Description' input field, and a 'Module' dropdown menu set to 'IS'. Below this is the 'Role Functions' section, which includes a toolbar with buttons: 'NEW', 'COPY', 'DELETE', 'CLOSE', 'UNLOCK', 'REOPEN', 'PRINT', 'AUTH', 'REVERSE', 'ROLLOVER', 'CONFIRM', 'LIQUIDATE', 'HOLD', 'TEMPLATE', 'VIEW', and 'G'. At the bottom of the window, there is a status bar with fields for 'Input by', 'Authorized by', 'DateTime', and 'Mod No', along with a 'Cancel' button.

- Click F7
- Input the Role Id
- Click F8

All the details related to the particular Role Id are displayed by the system.

2.4.6 Authorizing Role Profile

Before you link any users to a role, a user other than the one that defined it must authorize it. To authorize a role profile,

- Retrieve the role profile record so that it is displayed in the Role Definition screen.

- Click F7, input the Role ID and click F8. All the details pertaining to the Role ID specified are displayed. Choose the Auth button from the topmost row of buttons in the screen. The Maintenance Authorization Details screen is displayed. The detail of each modification that was made to the record, in the sequence of occurrence is shown in this screen. For each modification, the following details are displayed:
 - The sequence number for the modification, in the Mod No. field.
 - The operation that resulted in the modification, the Action field.
 - The user that effected the modification, in the Input By field.
 - The time at which the modification occurred, in the Date Time field.
 - In the lower grid portion, the changed values for each modification are displayed.
 - You can authorize any of the modified records, or all of them. Check the box in the Authorize field in the desired row, to mark it for authorization.

When you have marked the required modifications for authorization, click the OK button to effect the authorization. The Maintenance Authorization Details screen is closed, and you are returned to the Role Definition screen.

2.4.7 Editing Role Profile

You can make changes to an authorized role profile as follows:

- Retrieve the role profile record so that it is displayed in the Role Definition screen.
- Click the Edit button from the topmost row of buttons in the screen. The record is now in readiness for modification.
- After making your changes, click the Save button from the topmost row of buttons in the screen to save your changes. The record is now an edited, unauthorized record. Another user must now authorize it for it to be effective again.

2.5 User Profile

This section contains the following topics:

- [Section 2.5.1, "Defining User Profile"](#)
- [Section 2.5.2, "Restrictive Passwords Button"](#)
- [Section 2.5.3, "Roles Button"](#)
- [Section 2.5.4, "Functions Button"](#)
- [Section 2.5.5, "Branches Button"](#)
- [Section 2.5.6, "Modules Button"](#)
- [Section 2.5.7, "Disallowed Functions Button"](#)
- [Section 2.5.8, "Dashboard Mapping Button"](#)
- [Section 2.5.9, "Allowing User to Operate from Different Branches"](#)
- [Section 2.5.10, "Copying User Profile of Existing User"](#)
- [Section 2.5.11, "Deleting User Profile"](#)
- [Section 2.5.12, "Retrieving User Profile in User Profile Definition screen"](#)
- [Section 2.5.13, "Authorizing User Profile"](#)
- [Section 2.5.14, "Editing User Profile"](#)

2.5.1 Defining User Profile

A User Profile defines the activities that a user can carry out on the system. It also contains the user ID, the name through which the user will access the system and the password.

You can invoke the 'User Admin' screen by typing 'SMDUSRDF' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button.

The screenshot shows the 'User Admin' application window with the following sections:

- User Details:** Fields for User Identification*, Name*, External Identifier, LDAP DN, MFA Applicable (No), MFA ID, Language*, Home Branch*, Home Module*, Classification (Staff, Auto End Of Day, Customer), Access To Classified Information (Disabled), and View PII (Yes).
- Modules:** Checkboxes for Investments and Corporate.
- Status Description:** Radio buttons for User Status (Enabled, Hold, Disabled, Locked) and a Time Level* field.
- Invalid Logins:** Input fields for Cumulative and Successive.
- User Passwords:** Fields for Password, Password Changed On, Email, Start Date*, End Date, and Access Control (Both).
- Amount Limits:** Fields for Limit Currency*, Transaction Amount*, Auth Amount*, Date Format (MM/DD/YYYY), Auto Auth (No), Amount Format (Dot Comma), and Number Format (XXX,XXX,XXX,XXX or XX,XX,XX,XX,XXX).

At the bottom, there is a navigation bar with links: Restricted Passwords, Roles, Functions, Branches, Module, Disallowed Functions, Dashboard Mapping. Below this is a table with columns: Input by, Authorized by, DateTime, Mod No, Open, Authorized. There are 'Ok' and 'Exit' buttons on the right.

Specify the following basic information for the user profile, in the User Details section in this screen:

User Details

User Identification

Alphanumeric; 12 Characters; Mandatory

Specify a unique identifier for the user.

Name

Alphanumeric; 35 Characters; Mandatory

Specify the name of the user.

External Identifier

Alphanumeric; 20 Characters; Optional

Specify the External Identifier. External user is an alternative name for user id where two users cannot have same External identifier.

LDAP DN

Alphanumeric; 500 Characters; Optional

Specify LDAP DN details that is maintained in SSO screen.

The application will verify if only one user ID in FLEXCUBE Investor Service is mapped to the subject (DN) while authentication via SSO.

MFA Applicable

Optional

Select if Multi Factor Authorization (MFA) is applicable or not from the drop-down list. The list displays the following values:

- Yes
- No

MFA ID

Alphanumeric; 50 Characters; Optional

Specify the multi factor authorization ID.

If 'MFA Applicable' field is selected as 'Yes', then 'MFA ID' is mandatory.

Language

Alphanumeric; 3 Characters; Mandatory

Specify the preferred language for the user profile. Alternatively, you can also select language from the option list. The list displays all valid language code maintained in the system.

Home Branch

Alphanumeric; 3 Characters; Mandatory

Specify the home branch details.

Home Module

Alphanumeric; 30 Characters; Mandatory

Specify the default module from which the user profile will operate.

Debug Window Enabled

Optional

Check this box to enable debug window.

Show Dashboard

Optional

Check this box to show dashboard.

Classification

Optional

Select one of the classification options:

- Staff
- Auto End Of Day
- Customer

You can classify a user as belonging to one of the following categories:

User	Description
Staff	A user of the system who is an employee of your AMC. You can include any of the functions available in the system in the user profile. Ideally, you should not include functions that are part of End of Cycle or End of Day operations in the profile of a Staff user.

User	Description
Customer	A customer who would want to log into the system from a remote terminal. You can include only those functions through which the customer can inquire into balances and transactions.
AEOD	A user at the AMC who is responsible for running the automated End of Day operations. You can include any of the functions available in the system in the user profile. Ideally, you should include only functions that are part of End of Cycle operations in the profile of a AEOD user.

You can indicate this through the Classification field in the User Profile Definition screen.

Access To Classified Information

Optional

Select if access to classified information is allowed or not from the drop-down list. The list displays the following values:

- Allowed
- Disallowed

View PII

Optional

Select if Personal Identifiable Information has to be viewed or not from the drop-down list. The list displays the following values:

- Yes
- No

By default, 'View PII' field is set to 'Yes'.

If you select 'No', then you need to amend user roles with View only Roles to all 'Personal Identifiable Information' related screens. This is usually applicable to a user with only back-office role.

Modules

Investments

Optional

Check this box if the user is investment module user.

Corporate

Optional

Check this box if the user is corporate module user.

Status Description

User Status

Optional

Check one of the user status by checking the appropriate radio button:

- Enabled
- Hold
- Disabled
- Locked

Time Level

Numeric; 1 Character; Mandatory

Specify the time level.

Status Changed On

Display

The system displays the most recent date of status change of user profile.

Last Signed On

Display

The system displays the last logged in details

Invalid Logins**Cumulative**

Display

The system displays the number of successive invalid login attempts (in a single session) after which the user ID will be disabled for this profile.

Cumulative

Display

The system displays the number of successive invalid login attempts (spread across different sessions) after which the user ID will be disabled for this profile.

After you have entered these basic details, you can specify any of the following information for the user profile, depending upon the necessity.

Note

When authentication of credentials is unsuccessful due to an incorrect user ID, then the user ID will not be logged in the audit logs. In case the user ID is correct and the password is wrong, the attempt is logged in the audit log and the successive and cumulative failure count is incremented. When the user ID and password are correct, this is logged into the audit logs.

User Passwords**Password**

Alphanumeric; 32 Characters; Optional

Specify the user password to login. The static data AUTO_GEN_PASS_REQ is provided. The defaulted value 'Y' indicates whether the auto generation of the password is required or not.

Note

If the application level parameter which indicates the auto generation of the password is required or not is set to Y (Yes), then this field will be disabled and the system will create a random password in accordance with the parameters maintained at the level of the bank. The new password will be send to the respective user via mail.

At the time of setting up the Oracle FLEXCUBE Investor Servicing, the number of repeated successive parameters allowed in a password will be indicated.

For instance, if the number of repeated successive parameters allowed in a password has been set as '2', then the user password can have a character repeating only twice. Suppose,

if the number of repeated successive parameters has been specified as 2, a user password like AAA777 will be invalid. A valid password would be AA77.

Password Changed On

Display

The system displays the date when the password was last changed.

Email

Alphanumeric; 50 Characters; Optional

Specify the e-mail ID of the user.

Start Date

Date Format; Mandatory

Select the start date for the user password from the adjoining calendar.

End Date

Date Format; Optional

Select the end date for the user password from the adjoining calendar.

Note

The System is also configured to disallow the use of a pre-set number of previous passwords. This pre-set number is assigned at the time of installation, as a system parameter; the number can be subsequently changed if required, by changing this system parameter.

Access Control

Optional

Select the access control from the drop-down list. The list displays the following values:

- UI
- Gateway
- Both

The system is configured to disallow the use of a pre-set number of previous passwords. This pre-set number is assigned at the time of installation. As a system parameter; the number can be subsequently changed if required by changing this system parameter.

Amount Limits

Limit Currency

Alphanumeric; 3 Characters; Mandatory

Specify the currency to be mapped for transaction amount and auth amount.

Transaction Amount

Numeric; 18 Characters; Mandatory

Specify the maximum amount value that the user can specify while entering a transaction request from an investor.

Auth Amount

Numeric; 18 Characters; Mandatory

Specify the maximum amount value of an investor transaction that the user can authorize.

Date Format

Optional

Select the date format from the drop-down list. The list displays the following values:

- M/D/YYYY
- M/D/YY
- MM/DD/YY
- YY/MM/DD
- YYYY-MM-DD
- DD-MMM-YY
- DD-MMM-YYYY
- DD/MM/YYYY
- DD-MM-YYYY

Auto Auth

Optional

Select auto authorization status from the drop-down list. The list displays the following values:

- Yes
- No

Amount Format

Optional

Select the amount format from the drop-down list. The list displays the following values:

- Dot Comma
- Comma Dot
- Comma

Number Format

Optional

Select one of the number format options to be used:

- XXX,XXX,XXX,XXX
- XX,XX,XX,XX,XXX

2.5.2 Restrictive Passwords Button

You can maintain a list of passwords that the user is most likely to use. For example, a user may tend to use the names of loved ones, the AMC or AMC branch, department, etc. as a password as they are easy to remember. This might be a security risk as it will be easy for another person to guess a password. To prevent this, you can maintain a list of passwords that the user should not use. This list of restrictive passwords will be checked before a password is accepted when the user is changing passwords. If the password entered by the user is listed, it will not be accepted.

Click 'Restricted Passwords' button in the User Profile Definition screen, left margin of the screen. The Restricted Passwords screen is opened, where you can define a list of such passwords.

The screenshot shows a 'Restricted Passwords' dialog box. At the top, there is a title bar with the text 'Restricted Passwords' and a close button. Below the title bar is a 'Password Details' section. This section contains a table with one row. The first column of the table has a checked checkbox. The second column contains the text 'Password *'. Below the table is a large, empty text area for entering details. At the bottom right of the dialog, there are two buttons: 'Ok' and 'Cancel'.

Password Details

Password


Alphanumeric; 12 Characters; Mandatory

Specify the restricted password.

The user for whom you are defining the restrictive passwords cannot use the restrictive passwords defined in this screen.

2.5.3 Roles Button

Click 'Roles' button to attach the user profile you are defining to a role. The User Roles screen will be displayed.

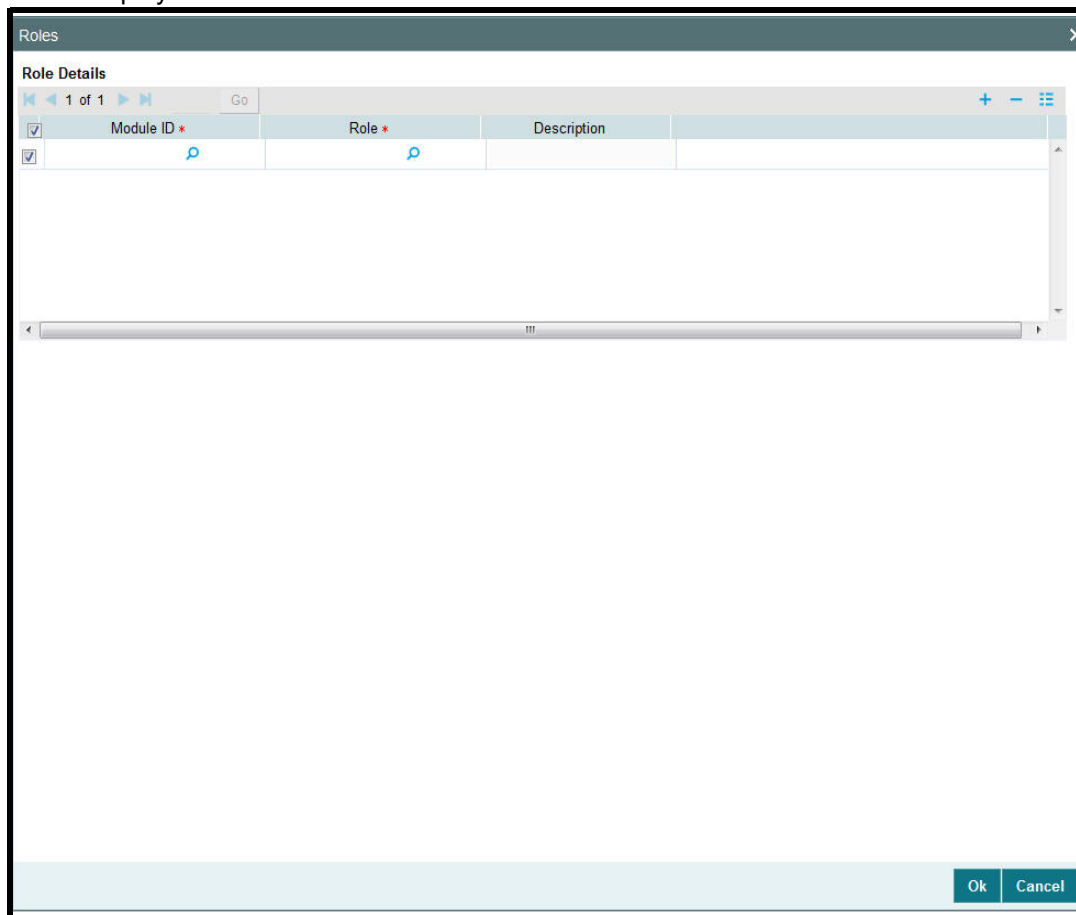

You can specify the following details:

Module ID

Alphanumeric; 30 Characters; Mandatory

Specify the module ID. Alternatively, you can select module ID code from the option list. The list displays all valid module ID maintained in the system.

Role

Alphanumeric; 15 Characters; Mandatory

Specify the role defined to the user.

Role Description

Display

The system displays the description for the selected role.

A role profile could contain either back office (Fund Manager) functions or front office (Agency Branch) functions.

When you have selected the required roles, click the OK button to save your changes.

2.5.4 Functions Button

In addition to attaching a user profile to a role, you can give rights to individual functions. For a user profile to which no role is attached, you can give access to specific functions. If you have one of the following:

- Attached one or more roles to a user profile
- You have given access to individual functions to a profile to which roles are attached.

A user profile could be given access to either back office (Fund Manager) functions or front office (Agency Branch) functions, depending upon the tasks that the user has to perform within your organization.

The rights for Function IDs that figure in both the role and user specific functions will be applied as explained in the following example.

Click 'Functions' button in the User Profile Definition screen to give access to functions for the user profile you are defining. The User Functions screen will be displayed.

The screenshot shows a window titled "Functions" with a close button (X) in the top right corner. Below the title bar is a "Function Details" section. It includes a navigation bar with "1 of 1" and a "Go" button. A table is displayed with the following columns: a selection column with a checkmark, "Branch Code *", "Function *", "NEW", "COPY", "DELETE", "CLOSE", "UNLOCK", "REOPEN", "PRINT", "AUTH", and "RE". The first row of the table is selected. At the bottom right of the window are "Ok" and "Cancel" buttons.

You can allow any of the following operations at record level for the user profile, in any function:

2.5.4.1 Static Screens

- New (Define a new record).
- Copy (Copy details of an existing record).
- Delete (Delete an existing record).
- Close (Close an existing record).
- Unlock (to amend an existing record).
- Reopen (Reopen an existing record).
- Print (Print the details of selected records).
- Authorize (Authorize any maintenance activity on a record).

2.5.4.2 Contracts and On-line Transaction Processing

1. View (to see the details of the contract).

2.5.4.3 Reports

- Generate (to generate reports).
- View (view the reports).
- Print (print the reports).

To delete the access rights you have specified for a function, select the required Function ID row and check the Delete box to the left of the Function ID field.

To edit the access rights you have specified for a function, select the required Function ID row and check the Edit box to the left of the Delete field.

2.5.5 Branches Button

For Staff and End of Day users, you can specify the branches from which they can operate. Click 'Branches' button in the User Profile Definition screen to define the branches in which the user should be allowed to operate.

Branches

Branches Allowed Disallowed

Branch List

1 of 1 Go

Branch *	Branch Name
<input checked="" type="checkbox"/>	


Ok Cancel

To prepare a list of branches from which the user is disallowed, choose the Disallowed option. Specify the branches that are disallowed for a user.

Similarly, to prepare a list of branches from which the user is allowed to operate, choose the Allowed option.

2.5.6 Modules Button

You can restrict the user to operate only from certain Modules, or certain branches of an AMC. To define such a restrictive list of AMC's or AMC branches, click 'Module' button in the left margin of the User Profile Definition screen. The Module screen is displayed.

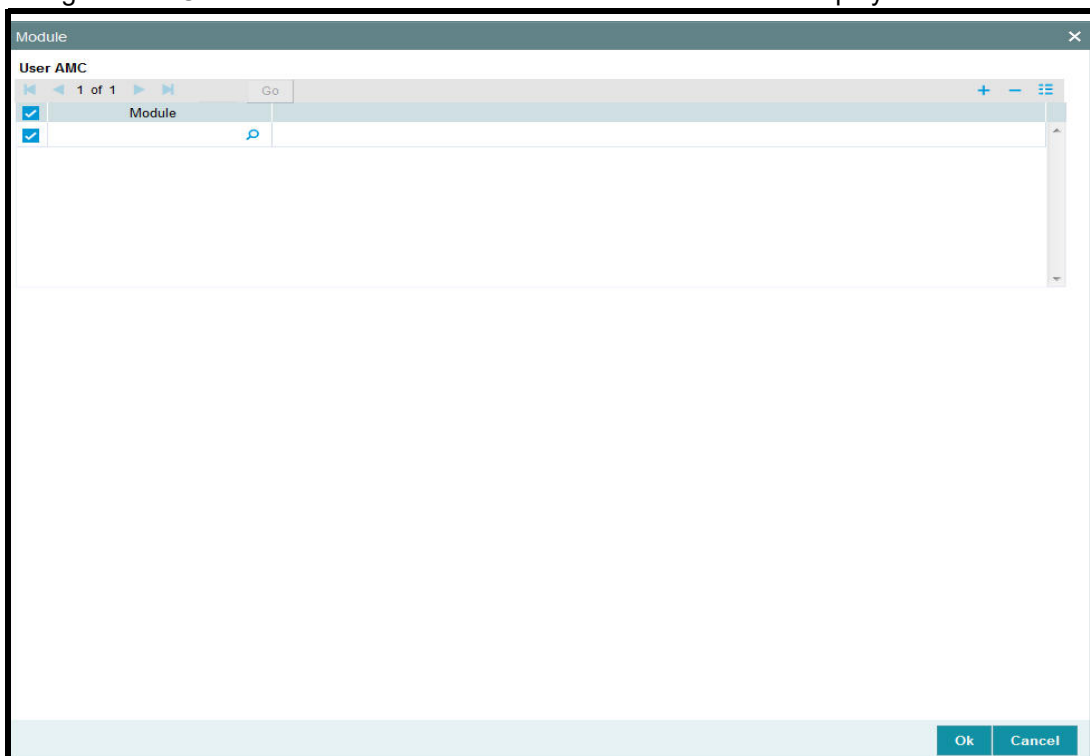


To allow the user to operate the system from a certain AMC, select it in the Available box, and move it to the Allowed box using the arrows. When you have selected the required AMC's, click 'Ok' button to save your changes.

2.5.7 Disallowed Functions Button

You can define a list of functions that the user is not allowed to operate, out of the functions list already associated with the user profile. To define such a restrictive list of functions, click 'Disallowed Functions' button in the left margin of the User Profile Definition screen.

The 'Disallowed Functions' screen is displayed. All the functions that are associated with the user profile are listed in the Available box.

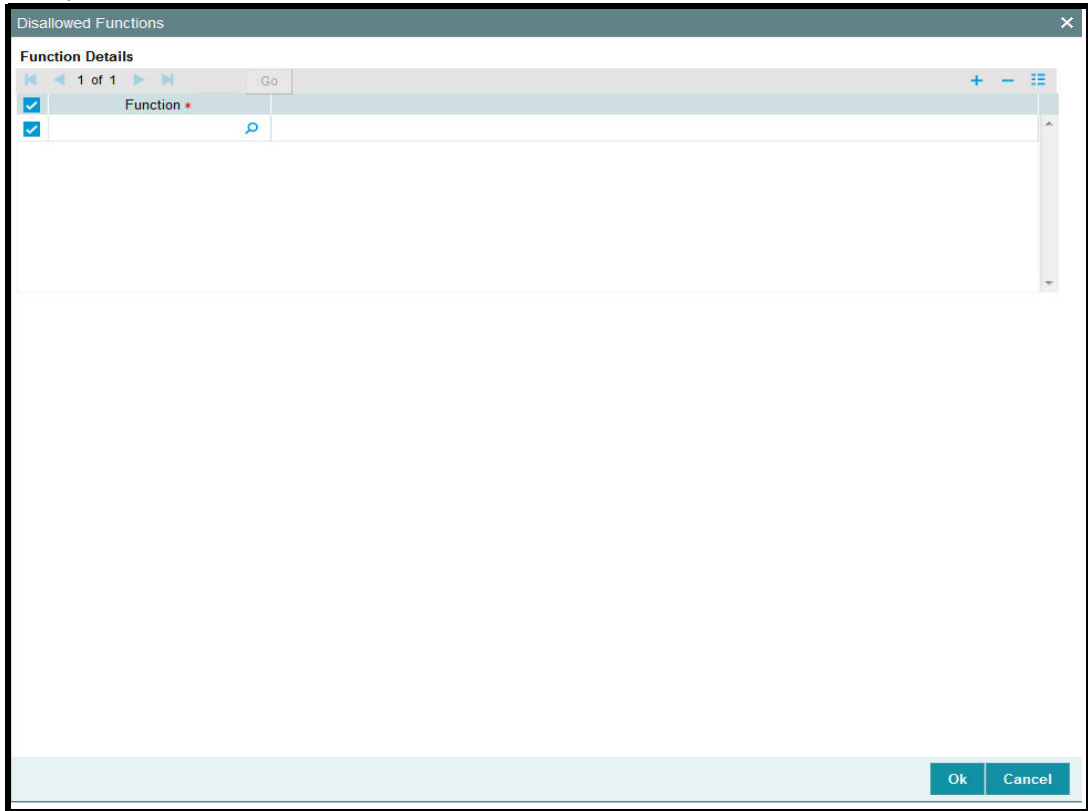

Click add icon. The system displays the available functions. Select the functions that you wish to disallow for the user.

2.5.8 Dashboard Mapping Button

Click 'Dashboard Mapping' button in 'User Admin' screen to map the dashboards. The 'Dashboard Maintenance' screen is invoked.

Dashboard Maintenance

User ID

User Name

<input type="checkbox"/>	Function	Description	Sequence Number	Clause Wizard	Where Clause
--------------------------	----------	-------------	-----------------	---------------	--------------

Ok Cancel

User ID

Alphanumeric; Optional

Specify the user ID.

User Name

Display

The system displays the user name for the selected user ID.

Click 'Populate' button, to specify the following details:

Function ID

Alphanumeric; Optional

Specify the function ID.

Description

Display

The system displays the description for the specified function ID.


Sequence Number

Display

The system displays the sequence number

Clause Wizard

Click 'Clause Wizard' button to invoke the following screen:

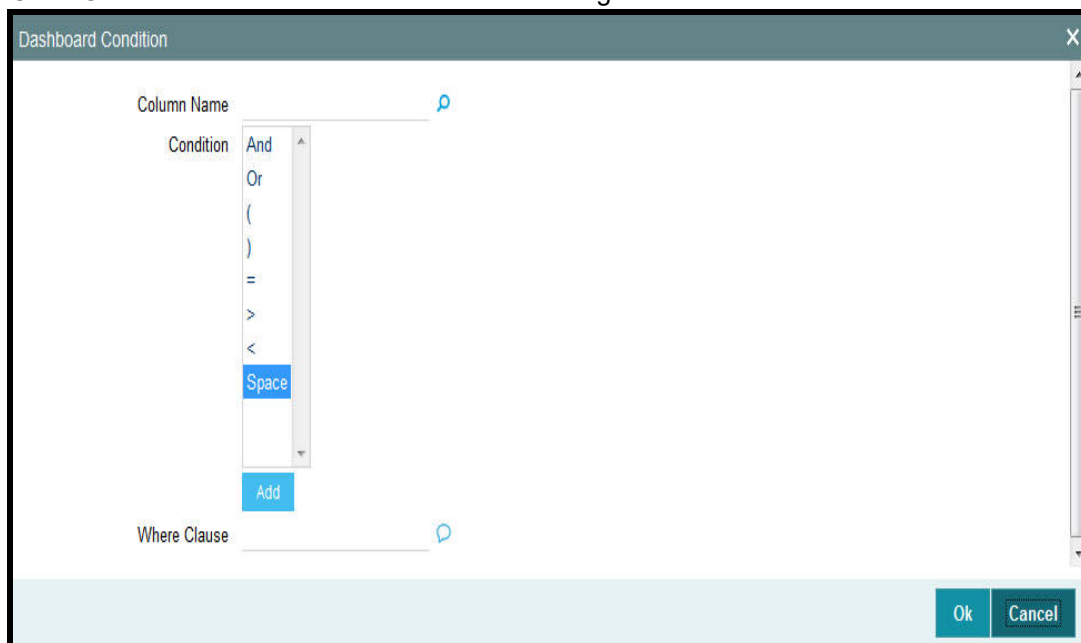

You can specify the following details:

Column Name

Alphanumeric; Mandatory

Specify the column name. Alternatively, you can select column name from the option list. The list displays all valid column names maintained in the system.

Condition

Mandatory

Select the conditions from the drop-down list.

Where Clause

Alphanumeric; Mandatory

Specify the where clause.

Show In Dashboard

Optional

Check this box to show in dashboard.

The system will default the value based on the value set at 'User settings' screen. If you uncheck this box, then the value will be applied upon change in modules.

2.5.9 Allowing User to Operate from Different Branches

When you create a User Profile, it will be attached to the branch where it is created. This means that the user can execute the functions defined for the profile from this branch. For a user profile, you can indicate that the user can access other branches also. The kind of

functions a user can perform in a branch other than the one where the user profile is created depends on the category of the user.

2.5.9.1 Allowing User to Operate from Different Branches of AMC

For mutual fund account customers, you can define a list of branches of the AMC from which the user would be allowed to operate. To define this list, click the AMC button in the User Profile Definition screen.

2.5.9.2 User Belonging to Staff Category

In each branch, you should create a user profile called the Guest. The functions defined for this branch will be applicable for a user of a different branch. Typically, this profile should have access to functions like inquiry into balances, etc. If this Guest profile is not created in a branch, a user not belonging to that branch will not be allowed to change branch to it.

The branch where the user profile is created is called the Home branch and the other branches are called Host branches.

2.5.9.3 User Belonging to AEOD Category

For such a user, the functions defined for the user profile where the profile created (the Home branch) will be applicable in every branch (Host branch).

2.5.9.4 User Belonging to Customer Category

A user of this category can log on only to the branch where the profile is created.

2.5.9.5 User Transaction and Auth Limits

You cannot capture any transaction, if the transaction amount is greater than the maximum transaction amount. Also, you cannot authorize any transaction if the transaction amount is greater than the maximum authorization amount.

This validation is applicable only for UT transactions, Bulk transaction, adjustment transaction, light weight transaction and LEP – initial investment, top up, surrender and switch transaction types.

The validation will not be applied if there is no exchange rate currency maintained for the limit currency of the user and the transaction currency.

2.5.10 Copying User Profile of Existing User

Often, you may have to create a user profile that closely resembles an existing one. In such a case, you can copy the existing profile on to the new one.

Click F7, input the User Identification and click F8. All the details pertaining to the User Identification specified are displayed. Choose the Copy button from the row of buttons at the topmost row of the screen. All the details of the profile except the User ID will be copied and displayed. Enter a unique User ID. You can change any of the details of the profile before saving it.

If you have retrieved an existing user profile and you want to copy it to a new user profile, click the Copy button in the topmost row of buttons in the screen. The Copy Information screen is opened, and you can specify the User ID for the new user profile.

The screenshot shows the 'User Admin' interface with the following sections and fields:

- User Details:**
 - User Identification * (text input)
 - Name * (text input)
 - External Identifier (text input)
 - LDAP DN (text input)
 - MFA Applicable: No (dropdown)
 - MFA ID (text input)
 - Language * (text input)
 - Home Branch * (text input)
 - Home Module * (text input)
 - Classification: Staff (radio), Auto End Of Day (radio), Customer (radio)
 - Access To Classified Information: Disallowed (dropdown)
 - View PII: Yes (dropdown)
 - Debug Window Enabled: checked (checkbox)
 - Show Dashboard: unchecked (checkbox)
- Modules:**
 - Investments: unchecked (checkbox)
 - Corporate: unchecked (checkbox)
- Status Description:**
 - User Status: Enabled (radio), Hold (radio), Disabled (radio), Locked (radio)
 - Time Level * (text input)
 - Status Changed On (text input)
 - Last Signed On (text input)
- Invalid Logins:**
 - Cumulative (text input)
 - Successive (text input)
- User Passwords:**
 - Password (text input)
 - Password Changed On (text input)
 - Email (text input)
 - Start Date * (text input)
 - End Date (text input)
 - Access Control: Both (dropdown)
- Amount Limits:**
 - Limit Currency * (text input)
 - Transaction Amount * (text input)
 - Auth Amount * (text input)
 - Date Format: MM/DD/YYYY (dropdown)
 - Auto Auth: No (dropdown)
 - Amount Format: Dot Comma (dropdown)
 - Number Format: @XXX,XXX,XXX,XXX (radio), XX,XX,XX,XX,XXX (radio)

At the bottom, there are navigation links: Restricted Passwords | Roles | Functions | Branches | Module | Disallowed Functions | Dashboard Mapping. A footer bar contains: Input by, Authorized by, DateTime, Mod No, Open, Authorized, and buttons for Ok and Exit.

All the details of the existing profile are copied onto the new user profile. Again, you can change any of the details of the profile before saving it.

2.5.11 Deleting User Profile

A user profile can be deleted only if the user is currently not logged on to the system.

To delete an existing user profile, retrieve the record of the user profile so that it is displayed in the main portion of the User Profile Definition screen. Then select the Delete button from the topmost row of buttons in the screen. If the user is logged in to the system, a warning message will be displayed and you cannot delete the profile.

If the user is not logged in, you will be prompted to confirm the deletion. The user profile will be deleted only if you confirm the deletion.

2.5.12 Retrieving User Profile in User Profile Definition screen

To retrieve a user profile that you have previously set up in the User Profile Definition screen, choose the Query button from the topmost row of buttons in the screen. The Query User screen is opened.

To retrieve a record:

- Press F7
- Input the data
- Press F8 to query the data

In this screen, you can specify the parameters that will the system will use to locate the user profile in the database and retrieve it.

When the record is retrieved based on your search specifications, it is displayed in the User Definition screen.

2.5.13 Authorizing User Profile

Before you link any users to a user, a user other than the one that defined it must authorize it.

To authorize a user profile:

- Retrieve the user profile record so that it is displayed in the User Definition screen.
- Click the Auth button from the topmost row of buttons in the screen. The Authorize User Admin screen is displayed. The details of each modification that was made to the

record, in the sequence of occurrence is shown in this screen. For each modification, the following details are displayed:

- The sequence number for the modification, in the Mod No. field.
- The operation that resulted in the modification, the Action field.
- The user that effected the modification, in the Input By field.
- The time at which the modification occurred, in the Date Time field.
- In the lower grid portion, the changed values for each modification are displayed.
- You can authorize any of the modified records, or all of them. Check the box in the Authorize field in the desired row, to mark it for authorization.

When you have marked the required modifications for authorization, click 'Ok' button to effect the authorization. The Maintenance Authorization Details screen is closed, and you are returned to the User Definition screen.

Modification Number	Modification Status	First Authorization Status	Authorization Status	Maker ID	Maker Date Stamp	First Checker Id	First Checker Date	Checker ID
<input checked="" type="checkbox"/>	1	N	A	Unauthorized	424333U01	2016-04-20 16:20:1	424333U01	2016-04-20 00:00:1

Warning Code	Warning Description
--------------	---------------------

Field Name	Old Value	New Value
------------	-----------	-----------

2.5.14 Editing User Profile

You can make changes to an authorized user profile as follows:

- Retrieve the user profile record so that it is displayed in the User Profile Definition screen.
- Click the Edit button from the topmost row of buttons in the screen. The record is now in readiness for modification.
- After making your changes, click the Save button from the topmost row of buttons in the screen to save your changes. The record is now an edited, unauthorized record. Another user must now authorize it for it to be effective again.

- Fields in User Profile Definition Screen

User Details Section

User Identification

Alphanumeric, Mandatory

Specify a unique identifier for the user profile.

Name

Alphanumeric, Mandatory

Specify the name of the user for the user profile.

External Identifier

Alphanumeric, Mandatory

Specify the External Identifier. External user is an alternative name for user id where two users cannot have same External identifier.

LDAP DN

Alphanumeric; Mandatory

Specify the LDAP DN details.

Number Format

Optional

Select the number format. The options are as follows:

- XXX,XXX,XXX,XXX
- XX,XX,XX,XX,XXX

Home Branch

Mandatory

Select the default branch from which the user profile will operate.

Lang

Mandatory

From the option list, select the default, preferred language for the user profile. The system displays Param Codes in the language assigned for the user, if they have been maintained in that language.

Home Module

Select the default module from which the user profile will operate.

Debug Window Enabled

Mandatory

Check this box to enable debug window.

Classification

Mandatory

Indicate the type of the user profile, whether the user is a staff user, customer user or an end of day operator (AEOD).

2.5.14.1 Modules Section

Mandatory

Indicate whether the user will operate corporate functions or investment functions in the system

2.5.14.2 User Status Section

The status of a user profile refers to whether or not it is enabled. A disabled user profile cannot operate on the system.

User Status

Mandatory

The status of the user profile in the system is shown in this field. By default, every user profile is created as an enabled profile. The status could be:

- Enabled – the profile is enabled and active in the system
- Disabled – it cannot be used to operate in the system
- Hold – the status is on hold in the system.

Status Changed On

Display Only

The most recent date on which the status of the user profile was changed is displayed here.

Time Level

Display Only

Last Signed On

Display Only

The most recent date on which the user logged in to the system is displayed here.

Password Section

Password

Alphanumeric, Mandatory

Specify the password using which the user will log in to the system.

At the time of setting up the Oracle FLEXCUBE Investor Servicing, the number of repeated successive parameters allowed in a password will be indicated.

For example, if the number of repeated successive parameters allowed in a password has been set as '2', then the user password can have a character repeating only twice. Suppose, if the number of repeated successive parameters has been specified as 2, a user password like AAA777 will be invalid. A valid password would be AA77.

Password Changed On

Display Only

The most recent date on which the password was changed is displayed here. When you are entering a new record, this field is blank and locked.

Start Date

Date format, Optional

Specify the date on and following which the password is valid.

End Date

Date Format, Optional

Specify the date up to which the password is valid.

Email

Mandatory when Auto Generation of Password is Yes.

System generates a password with respect to the predefined parameter set up in the SMS parameter Maintenance and password is send to the respective Email Id mentioned in the field.

Optional when Auto Generation of Password is No.

System does not generate a password; user has to get the password from User Admin screen.

Amounts Limit Section

Txn Amount

Numeric, Mandatory

Specify the maximum amount value that the user can specify while entering a transaction request from an investor.

Auth Amount

Numeric, Mandatory

Specify the maximum amount value of an investor transaction that the user can authorize.

Override Amount

Numeric, Mandatory

Specify the maximum amount value that the user can override while entering a transaction request from an investor.

Invalid Logins Section

Successive

Numeric, Optional

Specify the number of successive invalid login attempts (in a single session) after which the user ID will be disabled for this profile.

Cumulative

Numeric, Optional

Specify the number of successive invalid login attempts (spread across different sessions) after which the user ID will be disabled for this profile.

Status Bar Information

In this section, the following details are displayed for any user profile record:

- The user that has created the user profile, in the Input By field.
- The date and time of user profile creation, in the Date Time field.
- The user that has authorized the user profile, in the Authorized By field.
- The date and time of user profile authorization, in the Date Time field.
- The serial sequence number of the most recent modification of the user profile, in the Mod No field.
- The authorization status of the record, in the Authorize field.
- The open status of the record, in the Open field.

2.6 Hot Key Maintenance

This section contains the following topics:

- [Section 2.6.1, "Maintaining Hot Keys"](#)

2.6.1 Maintaining Hot Keys

You can set the most used screens in hot keys and launch the same using the hot key combination. By using the hot keys, you can avoid typing function IDs or using the menu path.

You can use hot keys with the key combinations from Ctrl+1 to Ctrl+9. In the predefined key combination, you can save the required function IDs. Based on the role/ function mapped the function ID will be listed in the screen.

When you click any of the function ID saved for particular key stroke from fast track the corresponding screen will be launched.

Note

Maximum number of Hot keys that can be entered is 9. Same key combination cannot be used for different function id in different modules.

You can invoke 'Hot Keys Maintenance' screen by typing 'SMDHOTKY/ UTDHOTKY' based on the module in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button.

The screenshot shows a window titled "Hot Keys Maintenance". At the top, there is a "Save" section containing a text input field labeled "User ID *". Below this is a "Hot Key" section with a table-like structure. It lists nine hot key combinations from "Ctrl+1" to "Ctrl+9". Each combination is followed by a blank text field for the function ID and a blue circular icon with a right-pointing arrow. At the bottom right of the window, there is a "Cancel" button.

You can specify the following details:

User ID

Display

The system displays the logged in user ID.

Hot Key

Ctrl+1

Alphanumeric; 8 Characters; Optional

Specify the valid function ID for the logged in user. Alternatively, you can select the valid function IDs from the option list. The list displays all valid function IDs maintained in the system.

Ctrl+2

Alphanumeric; 8 Characters; Optional

Specify the valid function ID for the logged in user. Alternatively, you can select the valid function IDs from the option list. The list displays all valid function IDs maintained in the system.

Ctrl+3

Alphanumeric; 8 Characters; Optional

Specify the valid function ID for the logged in user. Alternatively, you can select the valid function IDs from the option list. The list displays all valid function IDs maintained in the system.

Ctrl+4

Alphanumeric; 8 Characters; Optional

Specify the valid function ID for the logged in user. Alternatively, you can select the valid function IDs from the option list. The list displays all valid function IDs maintained in the system.

Ctrl+5

Alphanumeric; 8 Characters; Optional

Specify the valid function ID for the logged in user. Alternatively, you can select the valid function IDs from the option list. The list displays all valid function IDs maintained in the system.

Ctrl+6

Alphanumeric; 8 Characters; Optional

Specify the valid function ID for the logged in user. Alternatively, you can select the valid function IDs from the option list. The list displays all valid function IDs maintained in the system.

Ctrl+7

Alphanumeric; 8 Characters; Optional

Specify the valid function ID for the logged in user. Alternatively, you can select the valid function IDs from the option list. The list displays all valid function IDs maintained in the system.

Ctrl+8

Alphanumeric; 8 Characters; Optional

Specify the valid function ID for the logged in user. Alternatively, you can select the valid function IDs from the option list. The list displays all valid function IDs maintained in the system.

Ctrl+9

Alphanumeric; 8 Characters; Optional

Specify the valid function ID for the logged in user. Alternatively, you can select the valid function IDs from the option list. The list displays all valid function IDs maintained in the system.

2.7 Clearing Users

This section contains the following topics:

- [Section 2.7.1, "Clearing User that has Exited System Abnormally"](#)

2.7.1 Clearing User that has Exited System Abnormally


If a user exits the system abnormally, the administrative users can clear the logged in user profile so that the user can log in normally again

To clear a user, log in to the system as an administrative user, and type 'SMDCLUSR' in the field at the top right corner of the Application tool bar and click the adjoining arrow. The 'Clear User Profile' screen is displayed.

<input type="checkbox"/>	User ID	Terminal	Start Time	Clear
<input type="checkbox"/>				

In this screen, press F7 and select the User Id from the adjoining option list which displays the users logged in currently. After specifying the user id to be cleared, press F8. Upon pressing F8, system displays the User ID, terminal and start time information. Select the option 'Yes' from 'Clear' drop-down to clear the selected user.

Now click on the unlock icon from the toolbar menu and then click on save icon. The system will clear the selected user id and will display the Information message:

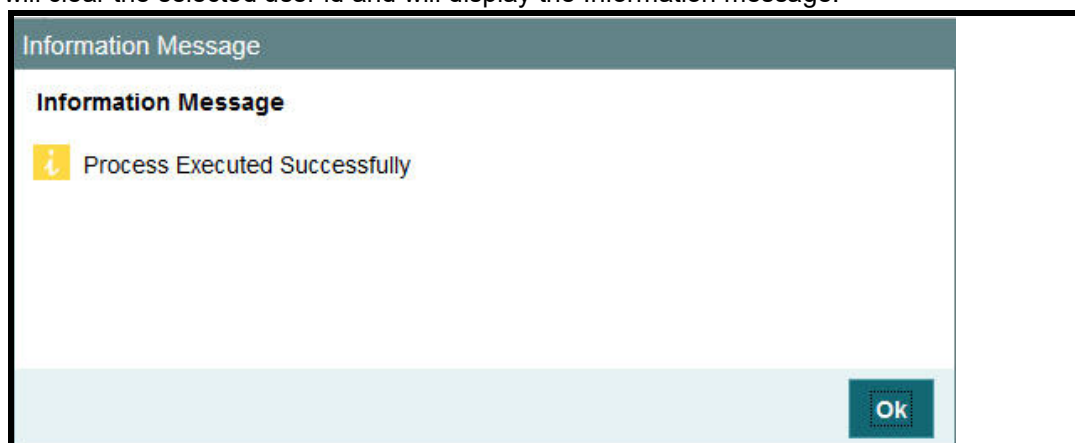

Click on OK to confirm.

To clear a user, check 'Clear' in the required row, and then click 'Clear' button.

2.8 SMS Parameters

This section contains the following topics:

- [Section 2.8.1, "Setting up SMS Parameters"](#)

2.8.1 Setting up SMS Parameters

You can set up certain parameters related to invalid logins and passwords using the 'SMS Parameters Maintenance' screen. You can invoke the 'SMS Parameters Maintenance' screen

by typing 'SMDPARAM' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button.

Password Length (characters)

Maximum

Numeric; Optional

Indicate the maximum number of characters to be used for a password. The number of characters in a user password is not allowed to exceed the maximum length that you specify here.

The maximum length of password defaults to 15.

Minimum

Numeric; Optional

Indicate the minimum number of characters to be used for a password. The number of characters in a user password is not allowed to fall below the minimum length that you specify here.

The minimum length of password defaults to 8. The minimum length that you specify must not exceed the maximum length that you have specified.

Invalid Logins

Cumulative

Numeric, Optional

Specify the allowable number of cumulative invalid attempts made during the course of a day, as well as the allowable number of consecutive or successive invalid attempts made at a time. In either case, if the number of invalid attempts exceeds the stipulated number, the user ID is disabled.

Successive

Numeric, Optional

Specify the allowable number of times an invalid login attempt is made by a user. Each user accesses the system through a unique User ID and password. While logging on to the system, if either the User ID or the Password is wrong, it amounts to an invalid login attempt. If the number of invalid attempts exceeds the stipulated number, the user ID is disabled.

Note

When authentication of credentials is unsuccessful due to an incorrect user ID, then the user id will not be logged in the audit logs. In case the user id is correct and the password is wrong, the attempt is logged in the audit log and the successive and cumulative failure count is incremented. When the user id and password are correct, this is logged into the audit logs.

Parameters

Password Repetitions

Numeric, Optional

Specify the number of previous passwords that cannot be set as the new current password, when a password change occurs.

Force Password Change after

Numeric, Optional

Specify the number of calendar days for which the password should be valid. After the specified number of days has, it is no longer a valid password and the user will be forced to change the password.

Minimum Days between Password Changes

Numeric, Optional

Specify the minimum number of calendar days that must elapse between two password changes. After a user has changed the user password, it cannot be changed again until the minimum number of days you specify here have elapsed.

Display Welcome Message

Optional

Check this option if you want to display welcome message when the login screen is launched.

Welcome Text Message

Alphanumeric; Conditional

If you have selected the 'Display Welcome Message' option, then specify the welcome text message to be displayed on launching the login screen,

Intimate Users (before password expiry)

Numeric, Optional

Specify the number of working days before password expiry that a warning is to be issued to the user. When the user logs into the system (the stipulated number of days before the expiry date of the password), a warning message will continue to be displayed till the password expires or till the user changes it.

Maximum Consecutive Repetitive Characters

Numeric, Optional

Define the maximum number of allowable repetitive characters occurring consecutively, in a user password. This specification is validated whenever a user changes the user password.

Minimum Number of Numeric Characters in Password

Numeric, Optional

Define the minimum number of numeric characters allowed in a password. The system validates the password at the time of creating a User ID in User admin screen and at the time when a user chooses to change his password.

- .Minimum No of Special Characters = 1

Minimum Number of Special Characters in Password

Numeric, Optional

Define the minimum number of special characters allowed in a password. The system validates the password at the time of creating a User ID in User admin screen and at the time when a user chooses to change his password.

- Minimum No of Special Characters = 1

Minimum Number of Upper Case Characters in Password

Numeric, Optional

You can define the minimum number of upper case characters allowed in a user password. The allowed upper case characters are from the US-ASCII character set only. The system validates the password at the time of creating a User ID in User admin screen and at the time when a user chooses to change his password.

If you do not specify the limits, the following default values will be used:

- Minimum No of Upper Case Characters = 1
- Maximum No of Numeric Characters = Maximum Password Length

Minimum Number of Lower Case Characters in Password

Numeric, Optional

You can define the minimum number of lowercase characters allowed in a user password. The allowed lower case characters are from the US-ASCII character set only. The system validates the password at the time of creating a User ID in User admin screen and at the time when a user chooses to change his password.

If you do not specify the limits, the following default values will be used:

- Minimum No of Lower Case Characters = 1
- Maximum No of Numeric Characters = Maximum Password Length

2.9 User Details Modification in Bulk

This section contains the following topics:

- [Section 2.9.1, "Modifying User Details in Bulk"](#)

2.9.1 Modifying User Details in Bulk

You can change or reset user passwords in bulk if you have the system admin rights. After modification of the user list, click 'Save'. The modified user list will be stored in a temporary table. The lists of users which are modified and mapped with a unique sequence number will not be available until the particular sequence number is authorized. When the particular sequence number is authorized those user details will be changed and updated.

You can invoke this screen by typing 'SMDCHPWD' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button.

User Identification *	Name	Password
<input checked="" type="checkbox"/>	<input type="text"/>	<input type="text"/>

In this screen, the following information is to be provided.

Sequence Number

Alphanumeric, Mandatory

Click on 'New' icon to generate a new 'Sequence Number'.

Process Date

Date Format

Select a date by clicking on the calendar icon beside the field. This field is generally useful for querying purpose.

Description

Alphanumeric, Optional

Provide a description of what modification is being done on selected user ids.

User Id

Alphanumeric, Mandatory

Select the User Id to be changed from the option list provided.

Name

Alphanumeric, Optional

Name of the user specific to the selected user id will be displayed in this field.

Password

Optional

Password of the selected user id will be displayed here. This field will be editable only if the 'Auto Generation Required' option is not selected at the application level. If the 'Auto Generation Required' option is checked, the password will be auto generated by the application.

Reset Password

Optional

Select this checkbox to reset the password in case of user ids where password needs to be auto generated.

2.10 User Credentials Change Summary

This section contains the following topics:

- [Section 2.10.1, "Retrieving a Record in User Credentials Change Summary Screen"](#)
- [Section 2.10.2, "Editing User Credentials Change Record"](#)
- [Section 2.10.3, "Viewing User Credentials Change Record"](#)
- [Section 2.10.4, "Deleting User Credentials Change Record"](#)
- [Section 2.10.5, "Authorizing User Credentials Change Record"](#)
- [Section 2.10.6, "Amending User Credentials Change Record"](#)
- [Section 2.10.7, "Authorizing Amended User Credentials Change Record"](#)

2.10.1 Retrieving a Record in User Credentials Change Summary Screen

You can retrieve a previously entered record in the Summary Screen, as follows:

Invoke the 'User Credentials Change Summary' screen by typing 'SMSCHPWD' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button and specify any or all of the following details in the corresponding details.

- The status of the record in the Authorization Status field. If you choose the 'Blank Space' option, then all the records are retrieved.
- The status of the record in the Record Status field. If you choose the 'Blank Space' option, then all records are retrieved
- Sequence Number
- Description
- Process Date

Click 'Search' button to view the records. All the records with the specified details are retrieved and displayed in the lower portion of the screen.

Note

You can also retrieve the individual record detail from the detail screen by querying in the following manner:

- Press F7
 - Input the Sequence Number
 - Press F8
-

You can perform Edit, Delete, Amend, Authorize, operations by selecting the operation from the Action list. You can also search a record by using a combination of % and alphanumeric value

2.10.2 Editing User Credentials Change Record

You can modify the details of User Credentials Change record that you have already entered into the system, provided it has not subsequently authorized. You can perform this operation as follows:

- Invoke the User Credentials Change Summary screen from the Browser.
- Select the status of the record that you want to retrieve for modification in the Authorization Status field. You can only modify records that are unauthorized. Accordingly, choose the Unauthorized option.
- Specify any or all of the details in the corresponding fields to retrieve the record that is to be modified.
- Click 'Search' button. All unauthorized records with the specified details are retrieved and displayed in the lower portion of the screen.
- Double click the record that you want to modify in the list of displayed records. The User Credentials Change Detail screen is displayed.
- Select Unlock Operation from the Action list to modify the record. Modify the necessary information.

Click Save to save your changes. The User Credentials Change Detail screen is closed and the changes made are reflected in the User Credentials Change Summary screen.

2.10.3 Viewing User Credentials Change Record

To view a record that you have previously input, you must retrieve the same in the User Credentials Change Summary screen as follows:

- Invoke the User Credentials Change Summary screen from the Browser.
- Select the status of the record that you want to retrieve for viewing in the Authorization Status field. You can also view all records that are either unauthorized or authorized only, by choosing the unauthorized / Authorized option.
- Specify any or all of the details of the record in the corresponding fields on the screen.
- Click 'Search' button. All records with the specified fields are retrieved and displayed in the lower portion of the screen.
- Double click the record that you want to view in the list of displayed records. The User Credentials Change Detail screen is displayed in View mode.

2.10.4 Deleting User Credentials Change Record

You can delete only unauthorized records in the system. To delete a record that you have previously entered:

- Invoke the User Credentials Change Summary screen from the Browser.
- Select the status of the record that you want to retrieve for deletion.
- Specify any or all of the details in the corresponding fields on the screen.
- Click 'Search' button. All records with the specified fields are retrieved and displayed in the lower portion of the screen.
- Double click the record that you want to delete in the list of displayed records. The User Credentials Change Detail screen is displayed.

- Select Delete Operation from the Action list. The system prompts you to confirm the deletion and the record is physically deleted from the system database.

2.10.5 Authorizing User Credentials Change Record

- An unauthorized User Credentials Change record must be authorized in the system for it to be processed. To authorize a record:
- Invoke the User Credentials Change Summary screen from the Browser.
- Select the status of the record that you want to retrieve for authorization. Typically, choose the unauthorized option.
- Specify any or all of the details in the corresponding fields on the screen.
- Click 'Search' button. All records with the specified details that are pending authorization are retrieved and displayed in the lower portion of the screen.
- Double click the record that you wish to authorize. The User Credentials Change Detail screen is displayed. Select Authorize operation from the Action List.

When a checker authorizes a record, details of validation, if any, that were overridden by the maker of the record during the Save operation are displayed. If any of these overrides results in an error, the checker must reject the record.

2.10.6 Amending User Credentials Change Record

After a User Credentials Change record is authorized, it can be modified using the Unlock operation from the Action List. To make changes to a record after authorization:

- Invoke the User Credentials Change Summary screen from the Browser.
- Select the status of the record that you want to retrieve for authorization. You can only amend authorized records.
- Specify any or all of the details in the corresponding fields on the screen.
- Click 'Search' button. All records with the specified details that are pending authorization are retrieved and displayed in the lower portion of the screen.
- Double click the record that you wish to authorize. The User Credentials Change Detail screen is displayed in amendment mode. Select Unlock operation from the Action List to amend the record.
- Amend the necessary information and click on Save to save the changes

2.10.7 Authorizing Amended User Credentials Change Record

An amended User Credentials Change record must be authorized for the amendment to be made effective in the system. The authorization of amended records can be done only from Fund Manager Module and Agency Branch module.

The subsequent process of authorization is the same as that for normal transactions.

2.11 Modules

This section contains the following topics:

- [Section 2.11.1, "Setting up Modules"](#)
- [Section 2.11.2, "Operations on Module Record"](#)

2.11.1 Setting up Modules

Typically, in an AMC, an installation of Oracle FLEXCUBE Investor Servicing installs the following components:

- Fund Manager
- Agency Branch

In a network scenario, the following situations are also possible:

- A single AMC with a single installation may have two or more “instances” of each component, or all components, as necessary.
- A multi-AMC situation where a number of AMC’s are networked and each has one or more installation of all components.

In either case, each installation of any or all of the components may have a different instance, or schema. However, for the purpose of multi-networking and enabling a user to log in to the system with a single user ID from any component, a single Security Management System database is necessary that contains the repository of all users in all the different instances.

Each instance of the installation, in a multi-networked situation, is referred to a Module.

A Module, therefore, is an instance of either one of the components, connecting to a single SMS database.

At the time of installation, the installation process sets up the Fund Manager module in the system, with a default agent and branch code.

Subsequently, the Sysadmin User must set up the Agency Branch module.

Subsequently, if any new agency branch modules need to be created, the Sysadmin User can create them using the ‘Module Setup’ screen. You can invoke this screen by typing ‘SMDMODUL’ in the field at the top right corner of the Application tool bar and click the adjoining arrow.

The screenshot shows the 'Module Setup' window with a 'Save' button at the top left. The main area is titled 'Module Setup Details' and contains two columns of input fields:

- Left Column:**
 - Module Type* (with a help icon)
 - Client ID* (with a help icon)
 - AMC/Distributor Module (with a help icon)
 - Agent
 - AMC ID
 - Security Level (with a help icon)
- Right Column:**
 - Module Type Description
 - Distribution Installation? (dropdown menu with 'No' selected)
 - Module ID
 - Branch
 - Distributor
 - Instance Name (with a help icon)
 - Default Module

At the bottom, there is a status bar with the following fields: Input by, DateTime, Mod No, Open, and Authorized. A 'Cancel' button is located in the bottom right corner.

To set up a module, proceed in the following manner:

- Click on the Module Profile button in the Restricted Access screen. The system displays the Module Profile Maintenance screen. The profile of the logged-in module is displayed. Click on the Add button to specify a new module. To make changes to the logged-in module, click the Amend button.

- Proceed to specify all the details of the Module that you want to set up, in the following sequence:
 - The ID of the Module, in the Module ID field. This must be unique, and if any duplicates are detected by the system, a warning message is displayed.
 - The connect string that identifies the instance for the module in the system registry, in the Connect String field. The connect string must contain the DSN name, user name and the password.
 - The agent and branch combination that will together be created as a Module, in the Agent Code and Branch Code fields. You can use the drop down lists to make your choice.
 - The type of module you are setting up, in the Module Type field. This could be Fund Manager or Agency Branch.
 - The ID of the client where the module is being created, in the Client ID field.
 - Check 'Default Mode' box to set the default mode.
 - Click save icon to save your user profile record. The system confirms the saving of the record.

The record is saved into the SMS database.

2.11.2 Operations on Module Record

After you have set up a module, you must have another user authorize it so that it would be effective in the system.

Before the module is authorized, you can edit its details as many times as necessary. You can also delete it before it is authorized.

After authorization, you can only make changes to any of the details through an amendment.

The Module Profile Maintenance screen can be used for the following operations on modules:

- Retrieval for viewing
- Editing unauthorized modules
- Deleting unauthorized modules
- Authorizing modules
- Amending authorized modules.

2.12 Printer Maintenance

This section contains the following topics:

- [Section 2.12.1, "Invoking Printer Maintenance Screen"](#)
- [Section 2.12.2, "Operations on Printing a Record"](#)

2.12.1 Invoking Printer Maintenance Screen

You can invoke 'Printer Maintenance' screen by typing 'SMSPRTMN' in the field at the top right corner of the Application tool bar and clicking the adjoining arrow button.

Printer maintenance

Search Advanced Search Reset Clear All

Search Is Case Sensitive

Authorized Open

Printer Id Printer Name

Branch

Records per page 15 1 of 1 Go Lock Columns 0

Authorized	Open	Printer Id	Printer Name	Branch
------------	------	------------	--------------	--------

Exit

You can retrieve a previously entered record in the 'Printer Maintenance' screen, as follows: Specify any or all of the following details in the 'Printer Maintenance' screen:

- The status of the record to be printed in the Authorized field. If you choose the "Blank Space" option, then all the records to be printed are retrieved.
- The status of the record in the Open field. If you choose the "Blank Space" option, then all the records to be printed are retrieved.
- Printer ID
- Printer Name
- Branch

Click save icon to save your record. The system confirms the saving of the record.

2.12.2 Operations on Printing a Record

After you have set up a record, you must have another user authorize it so that it would be effective in the system.

Before the record is authorized, you can edit its details as many times as necessary. You can also delete it before it is authorized.

After authorization, you can only make changes to any of the details through an amendment.

The Printer Maintenance screen can be used for the following operations on records:

- Retrieval for viewing
- Editing unauthorized records
- Deleting unauthorized records
- Authorizing records
- Amending authorized records.

2.13 Row Level Security Maintenance

This section contains the following topics:

- [Section 2.13.1, "Invoking Row Level Security Maintenance Screen"](#)

2.13.1 Invoking Row Level Security Maintenance Screen

You can enable or disable RLS policy using 'Row Level Security Maintenance' screen. You can invoke this screen by typing 'UTDRLSMT' in the field at the top right corner of the Application tool bar and click the adjoining arrow.

The screenshot shows a software window titled "Row Level Security Maintenance". At the top, there is a search bar labeled "Table Name" with a magnifying glass icon and a dropdown menu labeled "Enabled". Below the search bar is a "Default Status To" dropdown. A navigation bar shows "1 of 1" records. The main area contains a table with three columns: "Policy Name *", "Table Name *", and "Policy Function *". The table is currently empty. A "Cancel" button is located at the bottom right of the window.

You can specify the following details:

Table Name

Alphanumeric; 16 Characters; Optional

Specify the table name. Alternatively, you can select table name from the option list. The list displays all valid table name maintained in the system.

Enabled

Optional

Select if row level security to be enabled or not from the drop-down list. The list displays the following values:

- Yes
- No

Default Status To

Optional

Select the defaulted status from the drop-down list. The list displays the following values:

- Yes
- No

Policy Name

Alphanumeric; 16 Characters; Optional

Specify the policy name.

Tables

Alphanumeric; 16 Characters; Optional

Specify the table name.

Policy Function

Display

The system displays the policy function details.

Enabled

Optional

Select if RLS policies to be enabled or not from the drop-down list. The list displays the following values:

- Yes
- No

By default all the policy will be disabled.

Note

You can create new maintenance but will be restricted to delete or amend existing/ created policies.

On enabling the policy rule, the system will create new RLS policy. On disabling the system will drop the RLS policy.

Note

In case of enabling or disabling RLS policy, you should either enable it or disable it all. In case of partial enabling, the system behaviour could differ.

3. Ensuring Security for Agency Branch

In any financial environment, security of information is of paramount importance. Access to information must be made available in a carefully monitored manner. Controlling and maintaining these aspects also includes management of the people (or users) who will process this information on a day to day basis. Therefore, an efficient Security Management System is an important factor that will determine the strength and stability of a financial system.

This chapter takes you through the Security Maintenance features of the Oracle FLEXCUBE Investor Servicing system. You will learn how to use the security features in the system to suit your requirements and customize them for your environment.

This chapter is intended for the following persons in your bank or AMC:

Person	Operation
Oracle FLEXCUBE Investor Servicing Implementers	To set up the initial start-up parameters in the individual client workstations. To set up security management parameters for the AMC or AMC branch.
SMS Administrator for the Bank/ AMC	To set the SMS AMC or AMC branch parameters. To identify the Branch level SMS Administrators.
SMS Administrator for the Branch	To create User and Role profiles for the branches of your AMC. Will also grant access to the various functions to the Users.
A Oracle FLEX-CUBE user	Any user of Oracle FLEXCUBE whose activities are traced by the Security Management System.

This chapter contains the following sections:

- [Section 3.1, "Security Management"](#)
- [Section 3.2, "Some Important Terms"](#)
- [Section 3.3, "Other Features of Security Management System"](#)
- [Section 3.4, "User Role"](#)
- [Section 3.5, "User Profile"](#)
- [Section 3.6, "Clearing User"](#)
- [Section 3.7, "Auto Authorization"](#)

3.1 Security Management

In Oracle FLEXCUBE Investor Servicing, you can ensure security management at all levels in any kind of environment. This is due to a combination of the following features:

- User-level Access Control
- Business function-level Access Control
- Operation-level Access Control

Simply translated, this means that a person within your environment can:

- Only access the system as an authorized user.

- Only access certain allowed functions within the system.
- Only perform certain allowed operations on the function for which access is allowed.

3.2 Some Important Terms

Before you operate the security management system of your Oracle FLEXCUBE Investor Servicing installation, you must understand some important terms that you will encounter during the process.

System Administrators

Typically, at the time of installation, two users are created by default in the system database. These two users are the system administrators.

The system administrators subsequently create all users and user roles in the system, enabled by the logging in of the control clerks.

The system administrator user profiles would be typically created to enable the security managers in your bank or AMC, to log in to the system.

Functions

A function is any operation related to business maintenance or processing in the system. Most typically, each menu item appearing in the main menu could be thought of as a function. For a user, you can control access to different functions in the system.

Any functions related to the Fund Manager component can be thought of as back office functions, and any functions related to the Agency Branch could be thought of as front office components.

The functions are made available by the Oracle FLEXCUBE implementers, at the time of installation.

User Profile

Each user who will use the system is given a unique profile in the database. This profile is known as a user profile.

The profile of a user contains the User ID, the password and the functions to which the user has access. A user can be assigned access to either back office (Fund Manager) functions, or front office (Agency Branch) functions, depending upon the tasks that the user must perform in your organization.

Roles

It is likely that users working in the same department at the same level of hierarchy need to have similar user profiles. In such cases, you can define a Role Profile, which includes access rights to the functions that are common to a group of users. A user can be linked to a Role Profile by which you give the user access rights to all the functions in the Role Profile.

A role profile could contain either back office (Fund Manager) functions or front office (Agency Branch) functions.

3.3 Other Features of Security Management System

This section contains the following topics:

- [Section 3.3.1, "Restricted Number of Unsuccessful Attempts"](#)
- [Section 3.3.2, "Restricted Access to Branches"](#)
- [Section 3.3.3, "Restricted Access to AMC Branches"](#)
- [Section 3.3.4, "Restricted Access to Unit Holder Information "](#)
- [Section 3.3.5, "All Activities Tracked"](#)

3.3.1 Restricted Number of Unsuccessful Attempts

You can define the maximum number of unsuccessful attempts after which a User ID should be disabled. When a User ID has been disabled, the system administrators can enable it. The password of a user can be made applicable only for a fixed period. This forces the user to change the password at regular intervals thus reducing security risks. Further, you can define passwords that could be commonly used by a user as Restrictive Passwords at the user, user role and bank level. A user cannot use any password that is listed as a Restrictive Password at any of these levels.

3.3.2 Restricted Access to Branches

You can indicate the branches from where a user can operate. Click on the User Branch Restrictions button in the User Profile Definition screen to define the branches from where a user can operate.

3.3.3 Restricted Access to AMC Branches

For mutual fund account customers, you can indicate the branches of the AMC from where a user can operate. Click on the AMC button in the User Profile Definition screen to define the branches of the AMC from where a user can be allowed to operate.

3.3.4 Restricted Access to Unit Holder Information

In FCIS, you can view all details related to any unit holder (UH) account or CIF customer account at any point of time using the Consolidated Inquiry query. It is therefore necessary to ensure that users' (agents) access is restricted only to data they require. This is possible by defining groups and mapping users to these groups so as to make certain the users view data pertaining only to the groups and agency branches they are mapped to.

Assume the following:

Agency Branches	HK (Hong Kong), TA (Taiwan) and LUX (Luxembourg)
Users	PB, JC and JY
Existing Groups in the agency branches	IS (Intermediary Sales) & DS (Direct Sales)

Let us consider the following examples to see the data available to a user, based on his group and agency branch mappings, when he queries a unit holder in the Consolidated Inquiry screen:

Case 1

Assume a user 'PB' is mapped to the agency branch 'HK' and the groups 'DS' and 'IS'. In such a case, the user 'PB' is restricted to accessing details of only 'DS' and 'IS' unit holders maintained in the 'HK' agency branch (i.e. HK-DS and HK-IS). He cannot access unit holder details maintained in 'LUX' or 'TA' agency branches.

Case 2

Assume a user 'JC' is mapped only to the agency branch TA and to the groups 'IS' and 'DS'. He can access all details of unit holders belonging to the two groups (TA-DS and TA-IS). However, he cannot access unit holder details maintained in 'LUX' or 'HK' agency branches.

Case 3

Assume a user 'JY' is mapped to the agency branches 'HK' and 'TA' and to the groups 'IS' and 'DS'. This user can access unit holder details for the two groups in both the agency branches (i.e. HK-IS, HK-DS, TA-IS, TA-DS). However, he cannot access unit holder details maintained in the 'LUX' agency branch.

In the case of a UH, the system assigns the group of the UH's default intermediary agent as the group of the UH. Therefore, when a user queries a UH in the Consolidated Inquiry screen, information is made available only if:

- The user is mapped to the agency branch where the UH was created and
- The user is mapped to the group to which the UH's default intermediary agent belongs

For instance, if the default intermediary agent of a unit holder UH1 in the 'HK' agency branch is 'CITI' and 'CITI' belongs to the group 'IS', the user 'PB' (specified earlier) would have access to details regarding UH1.

But in both the following cases the user 'PB' would not be able to access the details for UH1:

- The unit holder UH1 had been created in the agency branch 'LUX'
- The default intermediary agent 'CITI' belonged to a group called 'TW'

The process of such data segregation (creating restrictions on data access for different users) is explained below:

3.3.5 All Activities Tracked

An extensive log is kept of all the activities on the system. You can generate reports on the usage of the system anytime. These reports give details of unsuccessful attempts at accessing the system along with the nature of these attempts. It could be an unauthorized user attempting to use the system, an authorized user trying to run a function without proper access rights, etc.

3.4 User Role

This section contains the following topics:

- [Section 3.4.1, "Procedure for Defining Role Profiles"](#)
- [Section 3.4.2, "Classifying Role Profile"](#)
- [Section 3.4.3, "Copying Role Profile"](#)
- [Section 3.4.4, "Deleting Role Profile"](#)
- [Section 3.4.5, "Authorizing Role Profile"](#)

3.4.1 Procedure for Defining Role Profiles

To recall, a Role Profile includes access rights to the functions that are common to a group of users.

After you have defined a Role Profile, you can link any user to it, thereby giving the linked user access rights to all the functions included in the Role Profile.

Role profiles are defined in the Role Definition screen. You can access the Role Definition screen by typing 'SMDROLDF' in the field at the top right corner of the Application tool bar and click the adjoining arrow.

Role Identification

Alphanumeric, Mandatory

Specify a unique identifier for the role profile.

Description

Alphanumeric, Mandatory

Key in some text that describes and qualifies the role profile, and is indicative of its characteristics.

Customer Specific

Optional

Check this box to indicate that the role profile has been set up for a specific customer of your AMC or AMC branch who might access the system from a remote terminal to inquire about their transactions or investor accounts.

Module

Optional

Select the default module for users linked to the role profile.

In this screen, you define a role profile as follows:

1. Click the Add button in the topmost row of buttons in the Role Definition screen. The screen is now in readiness for you to enter a new record.
2. Assign a unique identifier (ID) for the role, and a description.

3. You can then indicate that the role is to be deemed as specific to a customer, by checking the Customer Specific box.
4. You can also link it to a module in the system, either the Corporate Module or the Investment Module.
5. Then, you must indicate the functions that the role profile has access to.

You can allow any of the following operations at record level for the role profile in any function:

3.4.1.1 Static Tables

- NEW (Define a new record)
- COPY (Copy details of an existing record)
- DELETE (Delete an existing record)
- CLOSE (Close an existing record)
- UNLOCK (to amend an existing record)
- REOPEN (Reopen an existing record)
- PRINT (Print the details of selected records)
- AUTH (Authorize any maintenance activity on a record)
- REVERSE
- ROLLOVER
- CONFIRM
- LIQUIDATE
- HOLD
- TEMPLATE
- VIEW
- GENERATE

3.4.1.2 Contracts And On-Line Transaction Processing

- VIEW (to see the details of the contract)

3.4.1.3 Reports

- GENERATE (to generate reports)
- VIEW (view the reports)
- PRINT (print the reports)

To delete the access rights you have specified for a function, select the required Function ID row and check the Delete box at the extreme right end of the row.

To edit the access rights you have specified for a function, select the required Function ID row and check the Edit box at the extreme right end of the row.

3.4.2 Classifying Role Profile

By default, a Role Profile you define will be for the users who are employees of your AMC or AMC branch. You can indicate that the profile is for customers who might login from remote terminals to inquire on their transactions and balances.

3.4.3 Copying Role Profile

Often, you may have to create a Role Profile that closely resembles an existing one. In such a case, you can copy the existing profile on to the new one.

Choose the Copy button from the row of buttons at the topmost row of the screen. A list of existing role profiles will be displayed. Click on the one you want to copy. All the details of the profile except the Role ID will be copied and displayed. Enter a unique Role ID. You can change any of the details of the profile before saving it.

If you have retrieved an existing role profile and you want to copy it to a new role profile, click the Copy button in the topmost row of buttons in the screen. The Copy Information screen is opened, and you can specify the Role ID and Description for the new role profile.

You can invoke 'Role Definition' screen by typing 'SMDROLDF' in the field at the top right corner of the Application tool bar and click the adjoining arrow.

The screenshot shows the 'Role Definition' application window. At the top, there is a 'Save' section with a 'Role Identification *' field, a 'Description' field, and a 'Module' dropdown menu set to 'IS'. There is also a 'Customer Specific' checkbox. Below this is the 'Role Functions' section, which includes a toolbar with buttons for 'NEW', 'COPY', 'DELETE', 'CLOSE', 'UNLOCK', 'REOPEN', 'PRINT', 'AUTH', 'REVERSE', 'ROLLOVER', 'CONFIRM', 'LIQUIDATE', 'HOLD', 'TEMPLATE', and 'VIEW'. A table below the toolbar shows one role function with a checked checkbox in the first column. At the bottom, there are fields for 'Input by', 'Authorized by', 'DateTime', 'Mod No', 'Open', and 'Authorized', along with a 'Cancel' button.

All the details of the existing profile are copied onto the new role profile. Again, you can change any of the details of the profile before saving it.

3.4.4 Deleting Role Profile

A Role Profile should be deleted only if there are no users linked to it. Thus, before deleting a role profile, you should modify each user profile attached to it and delete the link to the role.

To delete an existing role profile, retrieve the record of the role profile so that it is displayed in the main portion of the Role Definition screen. Then select the Delete button from the topmost row of buttons in the screen. If the role is linked to any user, a warning message will be displayed. This message will bring your attention to the fact that the user profile to which the role is linked will not be the same if the role profile is deleted.

You will be prompted to confirm the deletion. The Role Profile will be deleted only if you confirm the deletion.

3.4.5 Authorizing Role Profile

Before you link any users to a role, a user other than the one that defined it must authorize it. To authorize a role profile,

1. Retrieve the role profile record so that it is displayed in the Role Definition screen.
2. Click the Auth button from the topmost row of buttons in the screen. The Maintenance Authorization Details screen is displayed. The detail of each modification that was made to the record, in the sequence of occurrence is shown in this screen. For each modification, the following details are displayed:
 - The sequence number for the modification, in the Modification Number field.
 - The record status of the modification, in the Record Status field.
 - The user that effected the modification, in the Maker ID field.
 - The date at which the modification occurred, in the Maker Date Stamp field.
 - In Field Details in the lower grid portion, the changed values for each modification are displayed.
3. You can authorize any of the modified records, or all of them. Check the box in the Authorize? field in the desired row, to mark it for authorization.

When you have marked the required modifications for authorization, click the OK button to effect the authorization. The Maintenance Authorization Details screen is closed, and you are returned to the Role Definition screen.

3.4.6 Editing Role Profile

You can make changes to an authorized role profile as follows:

1. Retrieve the role profile record so that it is displayed in the Role Definition screen.
2. Click the Edit button from the topmost row of buttons in the screen. The record is now in readiness for modification.
3. After making your changes, click the Save button from the topmost row of buttons in the screen to save your changes. The record is now an edited, unauthorized record. Another user must now authorize it for it to be effective again.

3.5 User Profile

This section contains the following topics:

- [Section 3.5.1, "Defining User Profile"](#)
- [Section 3.5.2, "Maintaining User Admin Details"](#)
- [Section 3.5.3, "Classifying User"](#)
- [Section 3.5.4, "Interfacing with External Systems for Authentication "](#)
- [Section 3.5.5, "Allowing User to Operate from Different Branches"](#)
- [Section 3.5.6, "Roles Button"](#)
- [Section 3.5.7, "Functions Button"](#)
- [Section 3.5.8, "Branches Button"](#)
- [Section 3.5.9, "Restrictive Passwords Button"](#)
- [Section 3.5.10, "Module Button"](#)
- [Section 3.5.11, "Disallowed Functions Button"](#)
- [Section 3.5.12, "Other Attributes for User Profile"](#)
- [Section 3.5.13, "Copying User Profile of Existing User"](#)

- [Section 3.5.14, "Deleting User Profile"](#)
- [Section 3.5.15, "Authorizing User Profile"](#)
- [Section 3.5.16, "Editing User Profile"](#)

3.5.1 **Defining User Profile**

A User Profile defines the activities that a user can carry out on the system. It also contains the user ID, the name through which the user will access the system and the password.

3.5.2 **Maintaining User Admin Details**

You can invoke 'User Admin' screen by typing 'SMDUSRDF' in the field at the top right corner of the Application tool bar and click the adjoining arrow.

The screenshot shows the 'User Admin' application window with the following sections and fields:

- User Details:**
 - User Identification * (text field)
 - Name * (text field)
 - External Identifier (text field)
 - LDAP DN (text field)
 - MFA Applicable (radio button, selected 'No')
 - MFA ID (text field)
 - Language * (text field)
 - Home Branch * (text field)
 - Home Module * (text field)
 - Classification (radio buttons: Staff, Auto End Of Day, Customer)
 - Access To Classified Information (radio button, selected 'Disallowed')
 - View PII (radio button, selected 'Yes')
 - Debug Window Enabled (checkbox, checked)
 - Show Dashboard (checkbox, unchecked)
- Modules:**
 - Investments (checkbox, unchecked)
 - Corporate (checkbox, unchecked)
- Status Description:**
 - User Status (radio buttons: Enabled, Hold, Disabled, Locked)
 - Time Level * (text field)
 - Status Changed On (text field)
 - Last Signed On (text field)
- Invalid Logins:**
 - Cumulative (text field)
 - Successive (text field)
- User Passwords:**
 - Password (text field)
 - Password Changed On (text field)
 - Email (text field)
 - Start Date * (text field)
 - End Date (text field)
 - Access Control (radio button, selected 'Both')
- Amount Limits:**
 - Limit Currency * (text field)
 - Transaction Amount * (text field)
 - Auth Amount * (text field)
 - Date Format (text field, value: MM/DD/YYYY)
 - Auto Auth (radio button, selected 'No')
 - Amount Format (radio button, selected 'Dot Comma')
 - Number Format (radio buttons: @XXX,XXX,XXX,XXX; @XX,XX,XX,XX,XXX)

At the bottom, there is a navigation bar with links: Restricted Passwords | Roles | Functions | Branches | Module | Disallowed Functions | Dashboard Mapping. Below this is a table with columns: Input by, Authorized by, DateTime, Mod No, Open, Authorized. The 'Open' and 'Authorized' columns have 'Ok' and 'Exit' buttons respectively.

Select 'New' from the Actions menu in the Application tool bar or click new icon to enter the details of the User Admin screen.

Specify the following basic information for the user profile, in the User Details section in this screen.

User Details Section

User Identification

Enter the unique identifier for the user, in the User Identification field. The minimum length of User Id must be six and the maximum number can be 12 characters.

External Identifier

Specify the External Identifier. External user is an alternative name for user id where two users can not have same External identifier.

Home Branch

The default branch that the user will login to the system from, in the Home Branch field

LDAP DN

The LDAP Details that have been maintained in the SSO screen have to be input here. Clicking on the 'Validate' button validates the LDAP details entered in the **Single Sign On**. The application will verify if only one user ID in FLEXCUBE Investor Service is mapped to the subject (DN) while authentication via SSO.

Name

The name of the user, in the Name field

Language

The default preferred language for the user, in the Language field

Classification

Select the classification of the user, that is, whether 'Staff', 'Customer' or 'Auto End of Day' from the options.

Access to Classified Information

Optional

Select if the access to classified information is allowed or not from the drop-down list. The list displays the following values:

- Allowed
- Disallowed

Modules Section

Select whether the user is a corporate modules user or an investment modules user.

Home Module

When you log into the system, you will be in the default module known as Home Module. Later you change the module according to your requirement.

User Status Module

Mandatory

The status of the user profile in the system is shown in this field. By default, every user profile is created as an enabled profile.

The status could be:

- Enabled – the profile is enabled and active in the system
- Hold – the status is on hold in the system.
- Disabled – it cannot be used to operate in the system

Status Changed On

Display Only

The most recent date on which the status of the user profile was changed is displayed here.

Time Level

Display Only

The most recent time at which the status of the user profile was changed is displayed here.

Last Signed On

Display Only

The most recent date on which the user logged in to the system is displayed here.

Password Section**Password**

Alphanumeric, Mandatory

Specify the password using which the user will log in to the system. The static data AUTO_GEN_PASS_REQ is provided. The defaulted value 'Y' indicates whether the auto generation of the password is required or not.

Note

If the application level parameter which indicates the auto generation of the password is required or not is set to Y (Yes), then this field will be disabled and the system will create a random password in accordance with the parameters maintained at the level of the bank. The new password will be send to the respective user via mail.

At the time of setting up the Oracle FLEXCUBE Investor Servicing, the number of repeated successive parameters allowed in a password will be indicated.

For example, if the number of repeated successive parameters allowed in a password has been set as '2', then the user password can have a character repeating only twice. Suppose, if the number of repeated successive parameters has been specified as 2, a user password like AAA777 will be invalid. A valid password would be AA77.

Password Changed On

Display Only

The most recent date on which the password was changed is displayed here. When you are entering a new record, this field is blank and locked.

Email

Optional

Specify a valid Email id at the time of user creation. All system generated passwords shall be communicated to the user via this mail id.

Start Date

Date format, Optional

Specify the date on and following which the password is valid.

End Date

Date Format, Optional

Specify the date up to which the password is valid.

Note

The System is also configured to disallow the use of a pre-set number of previous passwords. This pre-set number is assigned at the time of installation, as a system parameter; the number can be subsequently changed if required, by changing this system parameter.

Amounts Limit Section**Transaction Amount**

Numeric, Mandatory

Specify the maximum amount value that the user can specify while entering a transaction request from an investor.

Auth Amount

Numeric, Mandatory

Specify the maximum amount value of an investor transaction that the user can authorize.

Override Amount

Numeric, Mandatory

Specify the maximum amount value that the user can override while entering a transaction request from an investor.

Auto Auth

Select one of the following from the drop-down to indicate if auto authorisation is required or not:

- Yes
- No

Amount Format

Enter the amount format.

Invalid Logins Section**Successive**

Numeric, Optional

Specify the number of successive invalid login attempts (in a single session) after which the user ID will be disabled for this profile.

Cumulative

Numeric, Optional

Specify the number of successive invalid login attempts (spread across different sessions) after which the user ID will be disabled for this profile.

After you have entered these basic details, you can specify any of the following information for the user profile, depending upon the necessity.

Note

When authentication of credentials is unsuccessful due to an incorrect user ID, then the user id will not be logged in the audit logs. In case the user id is correct and the password is wrong, the attempt is logged in the audit log and the successive and cumulative failure count is incremented. When the user id and password are correct, this is logged into the audit logs.

3.5.3 Classifying User

You can classify a user as belonging to one of the following categories:

User	Description
Staff	A user of the system who is an employee of your bank or AMC. You can include any of the functions available in the system in the user profile. Ideally, you should not include functions that are part of End of Cycle or End of Day operations in the profile of a Staff user.
Customer	A customer who would want to log into the system from a remote terminal. You can include only those functions through which the customer can inquire into balances and transactions.
AEOD	A user at the bank or AMC who is responsible for running the automated End of Day operations. You can include any of the functions available in the system in the user profile. Ideally, you should include only functions that are part of End of Cycle operations in the profile of an AEOD user.

You can indicate this through the Classification field in the User Profile Definition screen.

3.5.4 Interfacing with External Systems for Authentication

An external system can be used for level authentications. While logging into Oracle FLEXCUBE the authentication details are authenticated with the Oracle FLEXCUBE database and also with the external system database.

For instance, if the LDAP server is used level authentications, while logging into Oracle FLEXCUBE the authentication details are authenticated with the Oracle FLEXCUBE database and also with the LDAP database.

If LDAP is enabled for your installation, a user can log-in to FCIS using the 'Alternate User ID'. However, the maker and checked IDs will display the FCIS user ID only.

Note

Alternate User Id is mandatory if your installation is LDAP enabled.

3.5.5 Allowing User to Operate from Different Branches

When you create a User Profile, it will be attached to the branch where it is created. This means that the user can execute the functions defined for the profile from this branch. For a user profile, you can indicate that the user can access other branches also. The kind of functions a user can perform in a branch other than the one where the user profile is created depends on the category of the user.

3.5.5.1 Allowing User to Operate from Different Branches of AMC

For mutual fund account customers, you can define a list of branches of the AMC from which the user would be allowed to operate. To define this list, click the AMC button in the User Profile Definition screen.

3.5.5.2 User Belonging to Staff Category

In each branch, you should create a user profile called the Guest. The functions defined for this branch will be applicable for a user of a different branch. Typically, this profile should have access to functions like inquiry into balances, etc. If this Guest profile is not created in a branch, a user not belonging to that branch will not be allowed to change branch to it.

The branch where the user profile is created is called the Home branch and the other branches are called Host branches.

3.5.5.3 User Belonging to AEOD Category


For such a user, the functions defined for the user profile where the profile created (the Home branch) will be applicable in every branch (Host branch).

3.5.5.4 User Belonging to Customer Category

A user of this category can log on only to the branch where the profile is created.

3.5.6 Roles Button

Click 'Roles' button in the bottom of the 'User Admin' screen to attach the user profile you are defining to a role. The User Roles screen will be displayed.

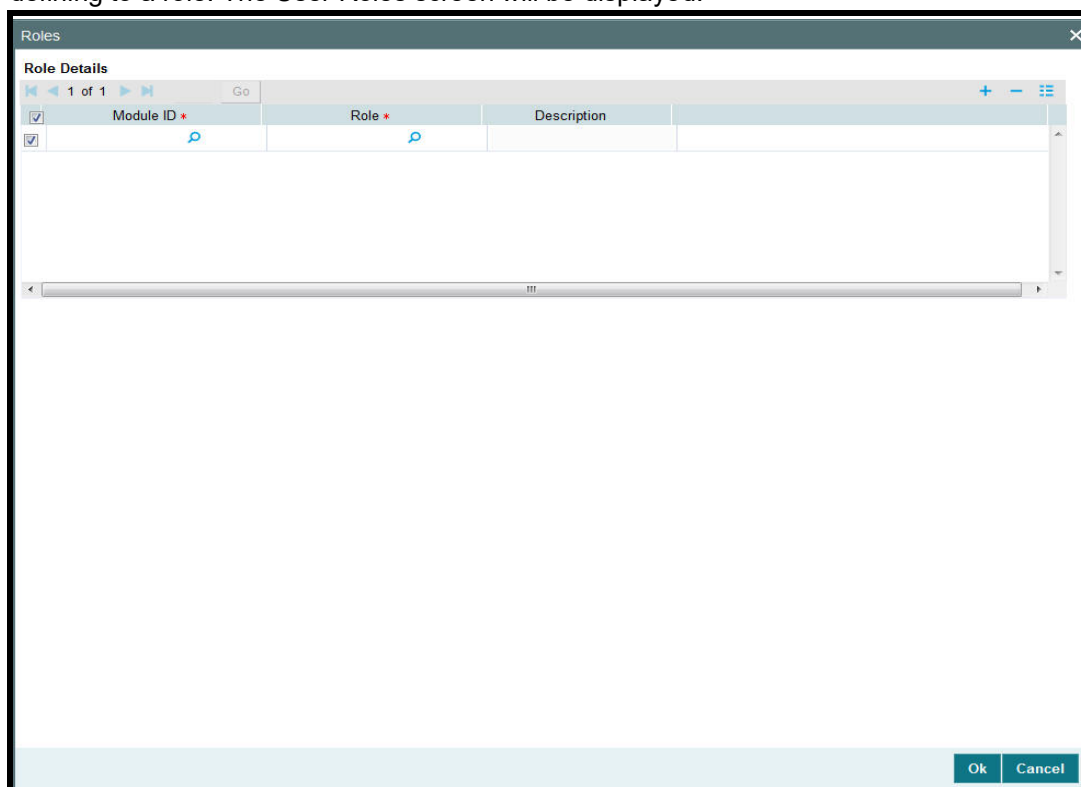

You can attach a role to the user profile, to be operable at a specific branch. Select a branch from the Branch Code field option list. Then click the Role ID field option list in the same branch row, to select the required rule profile. Click the option list icon for a list of role profiles that have been defined. To pick up a role from that list, double click on the role when it is highlighted.

To view the functions associated with the selected role, click the View button in the View Functions field. The User Role Functions view screen is displayed, with all the functions associated with the role.

A role profile could contain either back office (Fund Manager) functions or front office (Agency Branch) functions.

When you have selected the required roles, click the OK button to save your changes.

3.5.7 Functions Button


In addition to attaching a user profile to a role, you can give rights to individual functions. For a user profile to which no role is attached, you can give access to specific functions. If you have:

1. Attached one or more roles to a user profile, or
2. You have given access to individual functions to a profile to which roles are attached.

A user profile could be given access to either back office (Fund Manager) functions or front office (Agency Branch) functions, depending upon the tasks that the user has to perform within your organization.

The rights for Function IDs that figure in both the role and user specific functions will be applied as explained in the following example.

Click 'Functions' button in the bottom of the 'User Admin' screen to give access to functions for the user profile you are defining. The User Functions screen will be displayed.

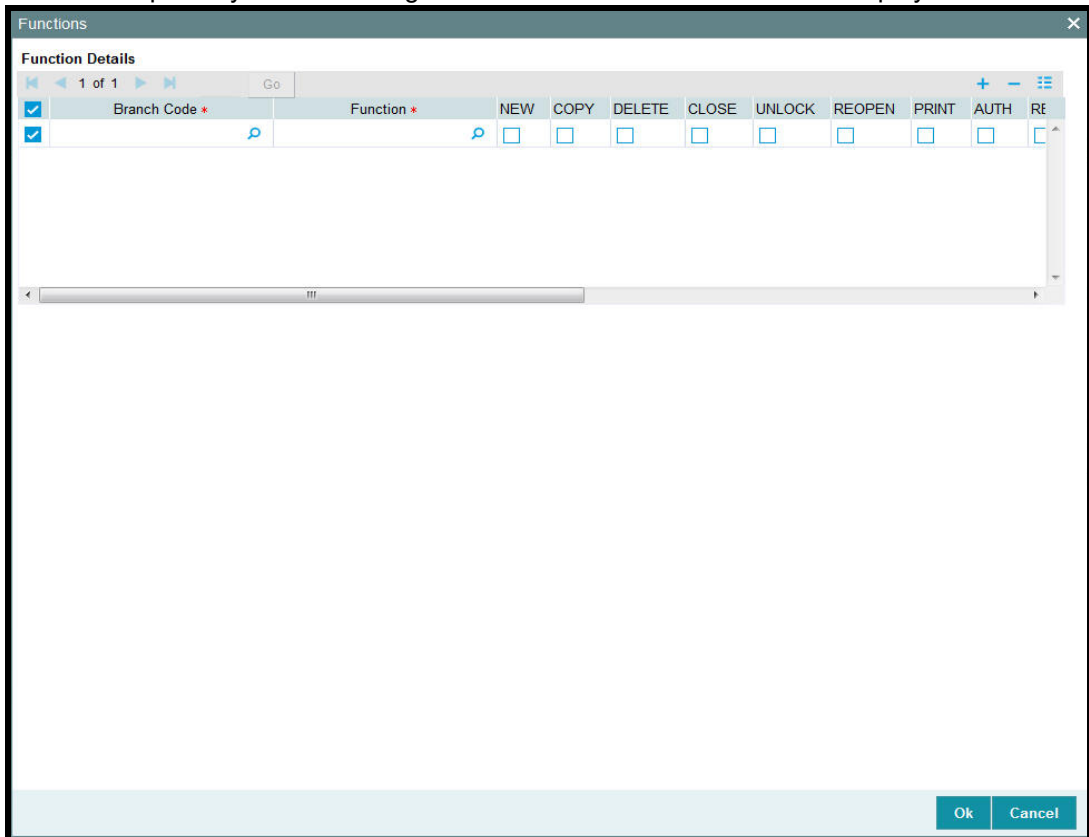

The various functions in the system come under five categories. These categories and the icon in the User Functions screen that lets you define the rights for these categories are as follows:

Category	Description	Button Name
Maintenance	Functions relating to the setting up of investor accounts and brokers.	Maintenance
Transactions Input	Functions relating to the entry of investor transactions.	
Batch	Functions relating to the automated operations like End of Day Processes.	Batch
Reports	Functions relating to the generation of reports in the various modules.	Reports
On-line	Functions relating to contract processing.	On-line

When the functions in a selected menu are listed, select the row representing the function that you want to link to the user profile.

For each function, you can allow or disallow specific record-level operations. These operations are displayed as a horizontal list, alongside the Maintenance Functions label, with each operation spelled out vertically.

In the selected function row, check the box pertaining to each operation you want to allow for the user profile.

You can allow any of the following operations at record level for the user profile, in any function:

3.5.7.1 **Static Screens**

- NEW (Define a new record).
- COPY (Copy details of an existing record).
- DELETE (Delete an existing record).
- CLOSE (Close an existing record).
- UNLOCK (to amend an existing record).
- REOPEN (Reopen an existing record).
- PRINT (Print the details of selected records).
- AUTH (Authorize any maintenance activity on a record).
- REVERSE
- ROLLOVER
- CONFIRM
- LIQUIDATE
- HOLD
- TEMPLATE
- VIEW
- GENERATE

3.5.7.2 Contracts and On-Line Transaction Processing

- VIEW (to see the details of the contract).

3.5.7.3 Reports


- GENERATE (to generate reports).
- VIEW (view the reports).
- PRINT (print the reports).

To delete the access rights you have specified for a function, select the required Function ID row and check the Delete box to the left of the Function ID field.

To edit the access rights you have specified for a function, select the required Function ID row and check the Edit box to the left of the Delete field.

3.5.8 Branches Button

For Staff and End of Day users, you can specify the branches from which they can operate. Click 'Branches' button in the bottom of the 'User Admin' screen to define the branches in which the user should be allowed to operate.

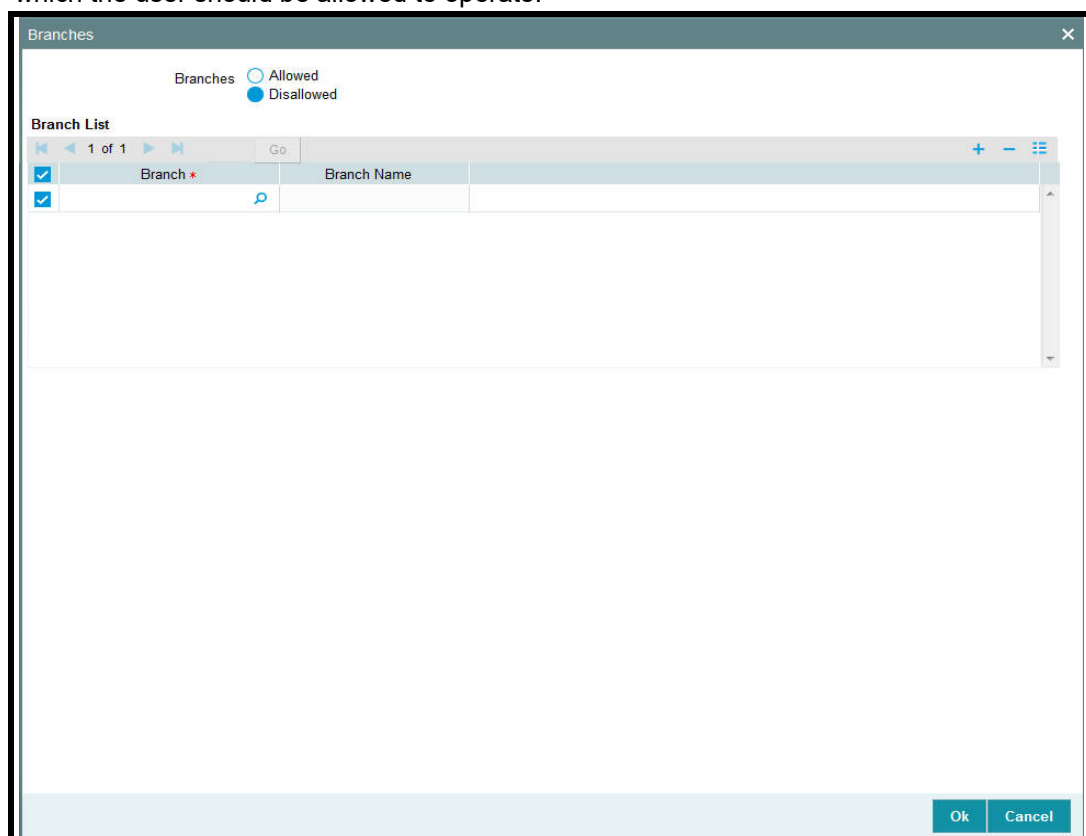

To prepare a list of branches from which the user is disallowed, choose the Disallowed option.

Then, using the arrows, move any required branch found in the Available box to the Disallowed box, and click 'Ok' button.


Similarly, to prepare a list of branches from which the user is allowed to operate, choose the Allowed option.

Then, using the arrows, move any required branch found in the Available box to the Allowed box, and click 'Ok' button.

3.5.9 Restrictive Passwords Button

You can maintain a list of passwords that the user is most likely to use. For example, a user may tend to use the names of loved ones, the AMC or AMC branch, department, etc. as a password as they are easy to remember. This might be a security risk as it will be easy for another person to guess a password. To prevent this, you can maintain a list of passwords that the user should not use. This list of restrictive passwords will be checked before a password is accepted when the user is changing passwords. If the password entered by the user is listed, it will not be accepted.


Click 'Restricted Passwords' button in the bottom of the 'User Admin' screen, left margin of the screen. The Restrictive Passwords screen is opened, where you can define a list of such passwords.

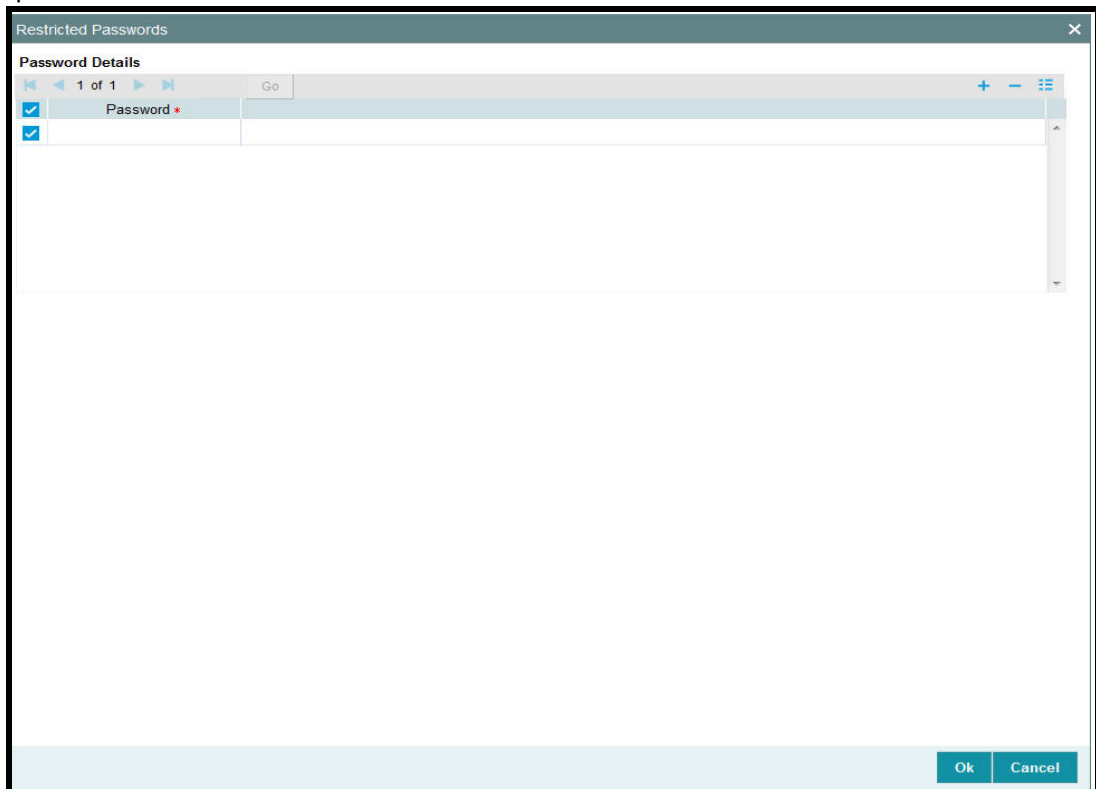

The user for whom you are defining the restrictive passwords cannot use restrictive passwords defined in the Role Profile screen.

3.5.10 Module Button

You can restrict the user to operate only from certain AMCs, or certain branches of an AMC. To define such a restrictive list of AMCs or AMC branches, click 'Module' button in the 'User Admin' screen. The User AMC screen is opened.

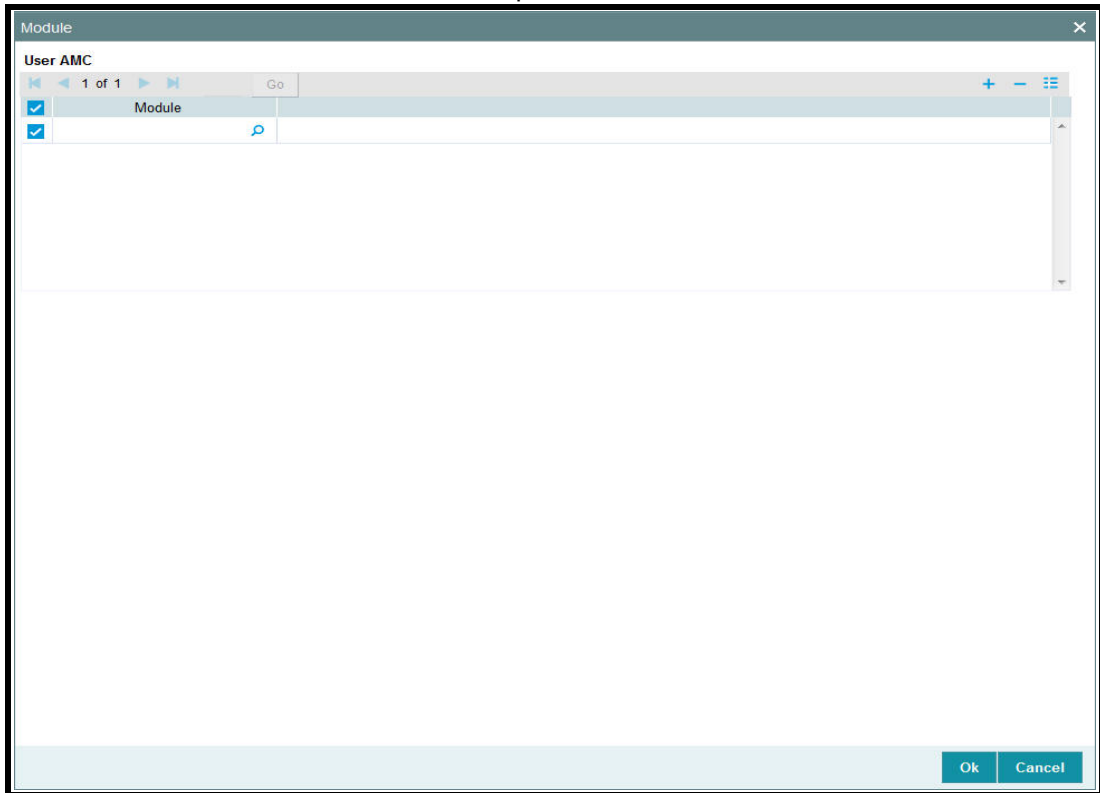


To allow the user to operate the system from a certain AMC, select it in the Available box, and move it to the Allowed box using the arrows. When you have selected the required AMCs, click the OK button to save your changes.

3.5.11 Disallowed Functions Button

You can define a list of functions that the user is not allowed to operate, out of the functions list already associated with the user profile. To define such a restrictive list of functions, click 'Disallowed Functions' button in the bottom of the 'User Admin' screen.

The User Function Disallowed screen is opened. All the functions that are associated with the user profile are listed in the Available box.

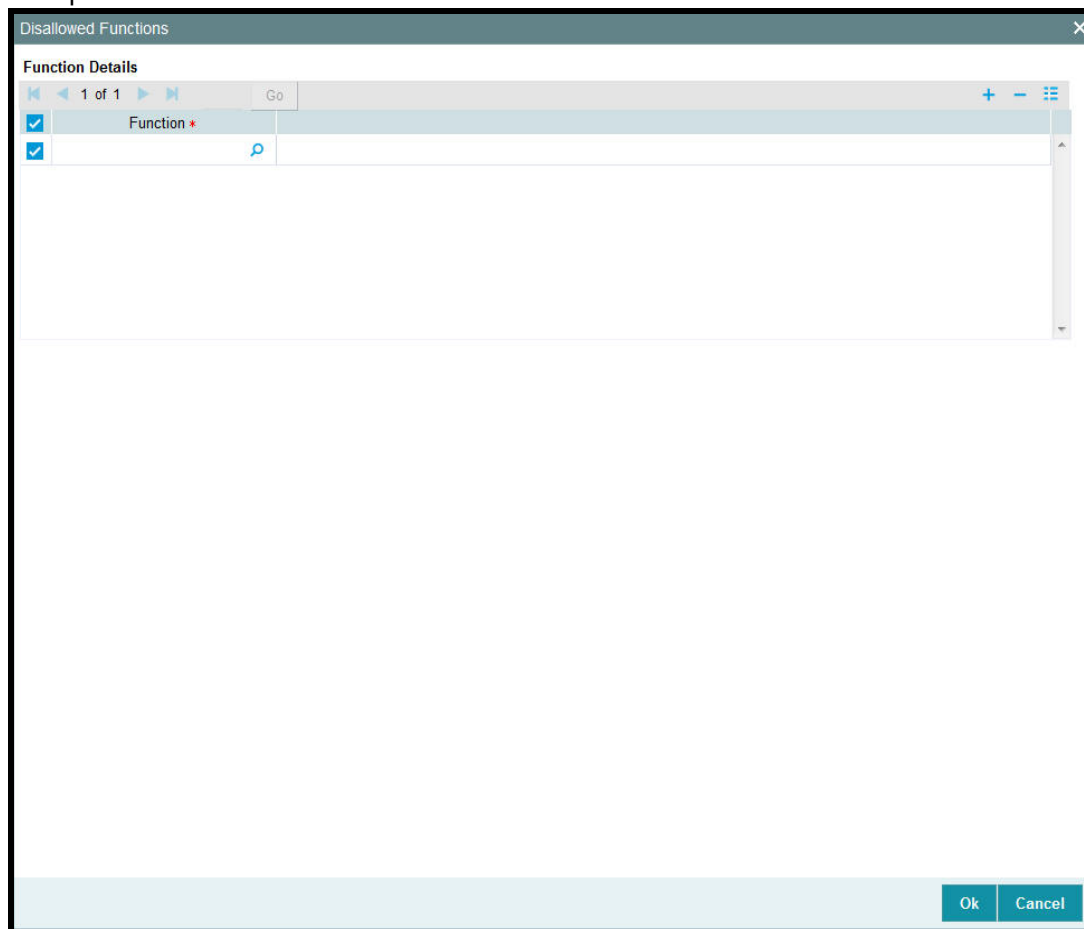

To disallow a function, select it in the Available box and move it to the Disallowed box using the arrows. After selecting and moving all required functions in such a manner, click OK to save your changes.

3.5.12 Other Attributes for User Profile

Other than the attributes you have defined for a user profile, such as the role association, function access rights, restrictive passwords and branch restrictions, you can define any of the following attributes. Click on the appropriate button in the group of buttons displayed in the left margin of the screen:

- The Rights button to define grant rights and grant queues for the user profile
- The User Till Restrictions button to define till restrictions for the user profile.
- The User Account Class Restrictions button to define a restrictive list of account classes for the user profile.
- The User GL Restrictions button to define a restrictive list of Node GL's and sub nodes.

3.5.13 Copying User Profile of Existing User

Often, you may have to create a user profile that closely resembles an existing one. In such a case, you can copy the existing profile on to the new one.

Choose the Copy button from the row of buttons at the topmost row of the screen. A list of existing user profiles will be displayed. Click on the one you want to copy. All the details of the profile except the User ID will be copied and displayed. Enter a unique User ID. You can change any of the details of the profile before saving it.

If you have retrieved an existing user profile and you want to copy it to a new user profile, click the Copy button in the topmost row of buttons in the screen. The Copy Information screen is opened, and you can specify the User ID for the new user profile.

The screenshot shows the 'User Admin' window with the following sections and fields:

- User Details:**
 - User Identification * (Name *)
 - External Identifier (LDAP DN)
 - MFA Applicable (No)
 - MFA ID
 - Language *
 - Home Branch *
 - Home Module *
 - Classification: Staff (selected), Auto End Of Day, Customer
 - Access To Classified Information: Disallowed
 - View PII: Yes
 - Debug Window Enabled (checked)
 - Show Dashboard (unchecked)
- Modules:**
 - Investments (unchecked)
 - Corporate (unchecked)
- Status Description:**
 - User Status: Enabled (selected), Hold, Disabled, Locked
 - Time Level *
 - Status Changed On
 - Last Signed On
- Invalid Logins:**
 - Cumulative
 - Successive
- User Passwords:**
 - Password
 - Password Changed On
 - Email
 - Start Date *
 - End Date
 - Access Control: Both
- Amount Limits:**
 - Limit Currency *
 - Transaction Amount *
 - Auth Amount *
 - Date Format: MM/DD/YYYY
 - Auto Auth: No
 - Amount Format: Dot Comma
 - Number Format: @XXX,XXX,XXX,XXX (selected), XXX,XXX,XXX,XXX

At the bottom, there is a navigation bar with links: Restricted Passwords | Roles | Functions | Branches | Module | Disallowed Functions | Dashboard Mapping. Below this is a table with columns: Input by, Authorized by, DateTime, Mod No, Open, Authorized. At the bottom right are 'Ok' and 'Exit' buttons.

All the details of the existing profile are copied onto the new user profile. Again, you can change any of the details of the profile before saving it.

3.5.14 Deleting User Profile

A user profile can be deleted only if the user is currently not logged on to the system.

To delete an existing user profile, retrieve the record of the user profile so that it is displayed in the main portion of the User Profile Definition screen. Then select the Delete button from the topmost row of buttons in the screen. If the user is logged in to the system, a warning message will be displayed and you cannot delete the profile.

If the user is not logged in, you will be prompted to confirm the deletion. The user profile will be deleted only if you confirm the deletion.

3.5.15 Authorizing User Profile

Before you link any users to a user, a user other than the one that defined it must authorize it.

To authorize a user profile,

1. Retrieve the user profile record so that it is displayed in the User Definition screen.
2. Click the Auth button from the topmost row of buttons in the screen. The Maintenance Authorization Details screen is displayed. The details of each modification that was made to the record, in the sequence of occurrence is shown in this screen. For each modification, the following details are displayed:
 - The sequence number for the modification, in the Mod No. field.
 - The status of the modification, the Record Status.
 - The user that effected the modification, in the Maker ID.
 - The date at which the modification occurred, in the Maker Date Stamp.
 - In the Field Details, the changed values for each modification are displayed.
3. You can authorize any of the modified records, or all of them. Check the box in the Authorize? field in the desired row, to mark it for authorization.

When you have marked the required modifications for authorization, click the OK button to effect the authorization. The Maintenance Authorization Details screen is closed, and you are returned to the User Definition screen.

The screenshot shows the 'Authorize' dialog box with the following data in the 'Records' table:

Modification Number	Modification Status	First Authorization Status	Authorization Status	Maker ID	Maker Date Stamp	First Checker Id	First Checker Date	Checker ID
<input checked="" type="checkbox"/>	1	N	A	Unauthorized	424333U01	2016-04-20 16:20:1	424333U01	2016-04-20 00:00:1

The 'Remarks' section contains four text input fields: Maker Remarks, Maker Override Remarks, First Checker Remarks, and Checker Remarks.

The 'Warnings' section contains a table with columns: Warning Code, Warning Description, and a checkbox.

The 'Fields' section contains a table with columns: Field Name, Old Value, New Value, and a checkbox.

Buttons: Accept, Cancel

3.5.16 Editing User Profile

You can make changes to an authorized user profile as follows:

1. Retrieve the user profile record so that it is displayed in the User Profile Definition screen.

2. Click the Edit button from the topmost row of buttons in the screen. The record is now in readiness for modification.
3. After making your changes, click the Save button from the topmost row of buttons in the screen to save your changes. The record is now an edited, unauthorized record. Another user must now authorize it for it to be effective again.

Status Bar Information

In this section, the following details are displayed for any user profile record:

- The user that has created the user profile, in the Input By field.
- The date and time of user profile creation, in the Date Time field.
- The user that has authorized the user profile, in the Authorized By field.
- The date and time of user profile authorization, in the Date Time field.
- The serial sequence number of the most recent modification of the user profile, in the Mod No field.
- The authorization status of the record, in the Authorize field.
- The open status of the record, in the Open field.

3.6 Clearing User

This section contains the following topics:

- [Section 3.6.1, "Clearing User That Has Exited"](#)

3.6.1 Clearing User That Has Exited

If a user exits the system abnormally, the administrative users can clear the logged in user profile so that the user can log in normally again. To clear a logged-in user in this manner, the Control Clerks need not login also.

To clear a user, log in to the system as an administrative user, and typing 'SMDCLUSR' in the field at the top right corner of the Application tool bar and click the adjoining arrow. The Clear Users screen is displayed.

To clear a user, you need to unlock and save after entering the above mentioned details.

3.7 Auto Authorization

This section contains the following topics:

- [Section 3.7.1, "Auto-authorization Features in System"](#)
- [Section 3.7.2, "Using Auto-authorization Feature"](#)
- [Section 3.7.3, "Auto Auth Maintenance Screen"](#)
- [Section 3.7.4, "Enabling Or Disabling Auto-Authorization User Group"](#)
- [Section 3.7.5, "Operations on Auto Authorization Records"](#)

3.7.1 Auto-authorization Features in System

Most of the information that you enter in to the system needs to be authorized to be effective. Except for the static information that you typically enter in to the system only once, all other information must be authorized. Authorization is required for all maintenance as well as transactional information in the system

When you enter information related to any of these events into the system, the record that is initially saved when you complete the data entry is retained in the system as unauthorized information, which must be subsequently authorized to become effective.

Usually, authorizing information in the system is an activity that follows a maker-checker concept, i.e., the user that enters the information must be necessarily different from the user that authorizes the information. Therefore, whereas one user group will have access to functions that involve entering information into the system, a different user group has access to the functions that involve information authorization, and there is no overlap of access privileges.

In some environments, the user that enters the information needs to be able to authorize it simultaneously. In such cases, the maker-checker concept leads to unnecessary delegation of activity, which is undesirable. This means that in such an environment, the user that enters the information must, on saving the entered record, be able to authorize the record. For such environments, the auto-authorization function is provided by the FC-IS system. When this function is used, the Save operation in any screen that involves data entry (apart from static information screens) will also invoke and perform the authorization for the records that have been entered.

It is possible to be selective about the business functions for which you need to use the auto-authorization feature. This means that you can enable the auto-authorization feature for the functions for which you require simultaneous authorization on saving the record, and you can keep it disabled for others, allowing them to go through the normal maker-checker process of authorization.

The following features comprise the auto-authorization facility in the system:

- The user administrator users can map the business users to the menu items, and make auto-authorization feature allowable for any business user – menu item mapping. All business checks, validations and processes that must be performed when the authorization happens will be triggered immediately following the use of the save operation, when the auto-authorization feature is allowed.
- The user administrator users can enable (or disable) auto authorization rights at a user group level. Any user roles and / or users associated with the user group would inherit the auto authorization privileges assigned to the user group. If a user ID is associated with multiple user roles, the most restrictive privilege assigned to the roles will be applicable.

- You can enable (or disable) the auto authorization feature for data operations in the New mode or the Amend mode, including data entry either for reference information, investor accounts or transactions. For transaction entry operations in either mode, you can enable (or disable) auto authorization for transactions involving any of the following circumstances:
 - Transactions for which the transaction currency is the limit currency, and the transaction amount falls within the limit amount for that currency
 - Back dated transactions
 - Transactions in respect of which applicable loads have been overridden
 - Transactions for which third party payment or delivery has been specified

3.7.2 Using Auto-authorization Feature

To allow the auto-authorization feature for a user group and a certain set of menu items, you must map the user groups to the menu items or the task for which auto-authorization is applicable, using the 'Auto Auth Maintenance' screen. You can access this screen by clicking Security Maintenance menu and selecting Auto Auth from the Browser.

3.7.3 Auto Auth Maintenance Screen

You can use this screen to map user groups to the tasks for which auto-authorization is applicable. If the user administrator or the module administrator users do not maintain the setup for each of the user groups in this screen, the auto-authorization is not enabled for that user group.

3.7.4 Enabling Or Disabling Auto-Authorization User Group

When you open the Auto Auth Maintenance screen, the auto authorization features that have been enabled for the module and the group to which the logged in user belongs, are displayed.

You can invoke this screen by typing 'SMDAUTAU' in the field at the top right corner of the Application tool bar and click the adjoining arrow.

The screenshot shows the 'Auto Auth' window with the following details:

- Save** button
- Input fields: **Group Id ***, **Module Id ***, **Task Code ***, **Task Description**, **Limit Currency**, **Limit Amount**
- Dropdowns: **New** (No), **Modify** (No)
- Additional Setup Details** section with a table:

Restricted Transaction *	Description
<input checked="" type="checkbox"/>	
- Bottom fields: **Input by**, **Authorized by**, **DateTime**, **Mod No**, **Open**, **Authorized**, and a **Cancel** button.

Group ID

Mandatory

Select the Group ID from the option list.

Module ID

Mandatory

Select the Module ID from the option list.

Task Code

Mandatory

Select the Task Code from the option list.

New

Optional

You can select 'Yes' to indicate new.

Amend

Optional

You can select 'Yes' to amend.

Limit Currency

Optional

Select the limit currency from the option list.

Limit Amount

Optional

Enter the limit amount.

Additional Setup Details Section**Restricted Transaction**

To amend the displayed list, select 'Unlock' from the Actions menu in the Application toolbar or click unlock icon. The screen is displayed in Amend mode, where you can make your changes. The changes you make will apply to all users and roles in the Group ID to which the logged in user belongs, for the logged in Module.

You can make changes as follows:

- To enable auto-authorization in the New mode for a task item, select 'YES' in the New field for the task item. To enable auto-authorization in the Amend mode for a task, select 'YES' in the Amend field for the task item.
- For transaction data entry task items, you can limit the volume of the transactions that can be auto-authorized. To setup this limit, specify the highest volume of the transaction that can be auto-authorized, in the Limit Amount field. You must also indicate the currency in which the volume you have specified is reckoned, in the Limit Currency field. You can indicate a different limit for each role or Group ID, if necessary.
- For transaction data entry, you can also enable (or disable) the auto authorization feature for transactions in the following circumstances:
- Back dated transactions. Select 'YES' in the Restrict Back Dated Transaction field to disable auto authorization of backdated transactions in the selected mode. Select 'NO' to enable auto authorization of backdated transactions in the selected mode.
- Transactions in respect of which applicable loads have been overridden. Select 'YES' in the Restrict Load Override Transactions field to disable auto authorization of load

override transactions in the selected mode. Select 'NO' to enable auto authorization of load override transactions in the selected mode.

- Transactions for which third party payment has been specified. Select 'YES' in the Restrict Third Party Payment Transactions field to disable auto authorization of third party payment transactions in the selected mode. Select 'NO' to enable auto authorization of third party payment transactions in the selected mode.
- Transactions for which third party delivery has been specified. Select 'YES' in the Restrict Third Party Delivery Transactions field to disable auto authorization of third party delivery transactions in the selected mode. Select 'NO' to enable auto authorization of third party delivery transactions in the selected mode.
- When you have finished making the auto-authorization specification for a user group, click save icon .

When you have finished making your auto-authorization specifications for each user group in this screen, and saved your changes, the auto-authorization feature is enabled, and when the user invokes the Save operation in any of the applicable task screens, the entered records are saved as authorized records.

To enable auto authorization for a user group other than the logged in user group, click save icon in the Auto Auth Maintenance screen.

The system displays the message as “Are you sure you want to close the current record?”.

Click 'Ok' button. The auto authorization record of the logged in user group, which was on display, is closed, and the Auto Auth Maintenance screen is opened in New mode.

The screenshot shows the 'Auto Auth' window with a 'Save' dialog. The dialog contains the following fields and controls:

- Group Id ***: Text input field with a search icon.
- Module Id ***: Text input field with a search icon.
- Task Code ***: Text input field with a search icon.
- Task Description**: Text input field.
- Limit Currency**: Text input field with a search icon.
- Limit Amount**: Text input field.
- New**: Dropdown menu with 'No' selected.
- Modify**: Dropdown menu with 'No' selected.

Additional Setup Details

Restricted Transaction *	Description
<input checked="" type="checkbox"/>	

At the bottom of the dialog, there are fields for 'Input by', 'Authorized by', 'DateTime', 'Mod No', and 'Open Authorized', along with a 'Cancel' button.

Select the user group for which you want to enable or disable the auto authorization rights, in the Group ID field. Select the corresponding module in the Module ID field, and click OK.

Subsequently, proceed to set up the auto authorization rights in the same manner as described above, for the amend operation.

How Auto Authorization Privileges Are Applied

The examples given below explain how auto authorization privileges could be granted, and how they are applied in the system:

3.7.5 Operations on Auto Authorization Records

After you have set up auto authorization for a user group, you must have another user authorize it so that it would be effective in the system.

Before the setup is authorized, you can edit its details as many times as necessary. You can also delete it before it is authorized.

After authorization, you can only make changes to any of the details through an amendment.

The Auto Auth Maintenance screen can be used for the following operations on auto authorization setups:

- Retrieval for viewing
- Editing unauthorized setups
- Deleting unauthorized setups
- Authorizing setups
- Amending authorized setups

To perform these operations, click on the appropriate buttons in the horizontal array of buttons in the Auto Auth Maintenance screen.

4. Enabling Auto Authorization

This chapter contains the following sections:

- [Section 4.1, "Normal Process of Authorization in System"](#)
- [Section 4.2, "Auto-authorization"](#)

4.1 Normal Process of Authorization in System

Most of the information that you enter in to the system needs to be authorized to be effective. Except for the static information that you typically enter in to the system only once, all other information must be authorized. Authorization is required for all maintenance as well as transactional information in the system.

When you enter information related to any of these events into the system, the record that is initially saved when you complete the data entry is retained in the system as unauthorized information, which must be subsequently authorized to become effective.

Usually, authorizing information in the system is an activity that follows a maker-checker concept, i.e., the user that enters the information must be necessarily different from the user that authorizes the information. Therefore, whereas one user group will have access to functions that involve entering information into the system, a different user group has access to the functions that involve information authorization, and there is no overlap of access privileges.

4.2 Auto-authorization

This section contains the following topics:

- [Section 4.2.1, "Auto-authorization Features in System"](#)
- [Section 4.2.2, "Using Auto-authorization Feature"](#)
- [Section 4.2.3, "Operations on Auto Authorization Records"](#)

4.2.1 Auto-authorization Features in System

In some environments, the user that enters the information needs to be able to authorize it simultaneously. In such cases, the maker-checker concept leads to unnecessary delegation of activity, which is undesirable. This means that in such an environment, the user that enters the information must, on saving the entered record, be able to authorize the record. For such environments, the auto-authorization function is provided by the FC-IS system. When this function is used, the Save operation in any screen that involves data entry (apart from static information screens) will also invoke and perform the authorization for the records that have been entered.

It is possible to be selective about the business functions for which you need to use the auto-authorization feature. This means that you can enable the auto-authorization feature for the functions for which you require simultaneous authorization on saving the record, and you can keep it disabled for others, allowing them to go through the normal maker-checker process of authorization.

The following features comprise the auto-authorization facility in the system:

- The user administrator users can map the business users to the menu items, and make auto-authorization feature allowable for any business user – menu item mapping. All business checks, validations and processes that must be performed when the

authorization happens will be triggered immediately following the use of the save operation, when the auto-authorization feature is allowed.

- The user administrator users can enable (or disable) auto authorization rights at a user group level. Any user roles and / or users associated with the user group would inherit the auto authorization privileges assigned to the user group. If a user ID is associated with multiple user roles, the most restrictive privilege assigned to the roles will be applicable.
- You can enable (or disable) the auto authorization feature for data operations in the New mode or the Amend mode, including data entry either for reference information, investor accounts or transactions. For transaction entry operations in either mode, you can enable (or disable) auto authorization for transactions involving any of the following circumstances:
 - Transactions for which the transaction currency is the limit currency, and the transaction amount falls within the limit amount for that currency
 - Back dated transactions
 - Transactions in respect of which applicable loads have been overridden
 - Transactions for which third party payment or delivery has been specified

4.2.2 Using Auto-authorization Feature

To allow the auto-authorization feature for a user group and a certain set of menu items, you must map the user groups to the menu items or the task for which auto-authorization is applicable, using the 'Auto Auth Maintenance' screen.

You can use this screen to map user groups to the tasks for which auto-authorization is applicable. If the user administrator or the module administrator users do not maintain the setup for each of the user groups in this screen, the auto-authorization is not enabled for that user group.

For UT transaction screen, you can derive auto authorization status along with branch, Function ID and User Level Auto Auth Preference using 'Auto Auth' screen. If the Branch, Function ID and menu level auto auth maintenance is derived as 'A' then you should auto authorize a UT Transaction record.

- First priority will be Infra level Auto Auth Derivation [branch, function ID and user level]
- Second priority will be Auto Auth Derivation based on Auto Auth setup maintenance 'SMDAUTAU'
- Third priority will be Auto Auth derivation FBC Access restriction detail 'UTDFAR'

If in all three levels if the auto auth check is returning true, then the system will auto authorize a record.

If there is no maintenance done in FBC Access restriction detail 'UTDFAR', then auto auth check will happen using Infra level Auto Auth Derivation and Auto Auth Setup Maintenance 'SMDAUTAU'.

If there is no maintenance done in Auto Auth Setup Maintenance 'SMDAUTAU', then auto auth check will happen using Infra level Auto Auth Derivation and FBC Access restriction detail.

If there is no maintenance done in Auto Auth Setup Maintenance 'SMDAUTAU' and FBC Access restriction detail 'UTDFAR'. Then auto auth check will happen using Infra level auto auth derivation.

You can invoke this screen by typing 'SMDAUTAU' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button.

The screenshot shows the 'Auto Auth' application window. It includes a 'Save' button at the top left. The main form area contains several input fields: 'Group Id *', 'Module Id *', 'Task Code *', 'Task Description', 'Limit Currency', and 'Limit Amount'. Each of these fields has a magnifying glass icon to its right. Below the 'Group Id *' and 'Module Id *' fields are two dropdown menus labeled 'New' and 'Modify', both currently set to 'No'. A section titled 'Additional Setup Details' contains a table with two columns: 'Restricted Transaction *' and 'Description'. The table has one row with a checked checkbox in the first column and a magnifying glass icon in the second column. At the bottom of the window, there are fields for 'Input by', 'DateTime', 'Mod No', 'Open', 'Authorized by', and 'Authorized', along with a 'Cancel' button.

You can specify the following details:

Group Id

Alphanumeric; 16 Characters; Mandatory

Specify the group ID. Alternatively, you can select group ID from the option list. The option list displays all valid group ID maintained in the system.

Module Id

Alphanumeric; 16 Characters; Mandatory

Specify the module ID. Alternatively, you can select module ID from the option list. The option list displays all valid module ID maintained in the system.

New

Optional

Select if the auto authorization is enabled or not for New mode from the drop-down list. The list displays all following values:

- Yes
- No

Modify

Optional

Select if the auto authorization is enabled or not for Modify mode from the drop-down list. The list displays all following values:

- Yes
- No

Task Code

Alphanumeric; 16 Characters; Mandatory

Specify the task code. Alternatively, you can select task code from the option list. The option list displays all valid task code maintained in the system.

Task Description

Display

The system display the description for the selected task code.

Limit Currency

Alphanumeric; 3 Characters; Mandatory

Specify the limit currency code. Alternatively, you can select limit currency code from the option list. The option list displays all valid limit currency code maintained in the system.

Limit Amount

Numeric; 8 Characters; Mandatory

Specify the limit amount.

Additional Setup Details**Restricted Transaction**

Numeric; 3 Characters; Mandatory

Specify the restricted transaction code. Alternatively, you can select restricted transaction code from the option list. The option list displays all valid restricted transaction code maintained in the system.

Auto auth setup can be done based on following additional information:

- Backdated Transaction
- Load Overridden Transaction
- Third Party Payment Transaction
- Third Party Delivery Transaction

Description

Display

The system display the description for the selected restricted transaction code.

4.2.2.1 Enabling or Disabling Auto-authorization for User Group

When you open the Auto Auth Maintenance screen, the auto authorization features that have been enabled for the module and the group to which the logged in user belongs, are displayed.

To amend the displayed list, click unlock icon. The screen is displayed in Amend mode, where you can make your changes. The changes you make will apply to all users and roles in the Group ID to which the logged in user belongs, for the logged in Module.

You can make changes as follows:

- To enable auto-authorization in the New mode for a task item, select 'YES' in the New field for the task item. To enable auto-authorization in the Amend mode for a task, select 'YES' in the Amend field for the task item.
- For transaction data entry task items, you can limit the volume of the transactions that can be auto-authorized. To setup this limit, specify the highest volume of the transaction that can be auto-authorized, in the Limit Amount field. You must also indicate the currency in which the volume you have specified is reckoned, in the Limit Currency field. You can indicate a different limit for each role or Group ID, if necessary.
- For transaction data entry, you can also enable (or disable) the auto authorization feature for transactions in the following circumstances:
- Back dated transactions. Select 'YES' in the Restrict Back Dated Transaction field to disable auto authorization of backdated transactions in the selected mode. Select 'NO' to enable auto authorization of backdated transactions in the selected mode.
- Transactions in respect of which applicable loads have been overridden. Select 'YES' in the Restrict Load Override Transactions field to disable auto authorization of load override transactions in the selected mode. Select 'NO' to enable auto authorization of load override transactions in the selected mode.
- Transactions for which third party payment has been specified. Select 'YES' in the Restrict Third Party Payment Transactions field to disable auto authorization of third party payment transactions in the selected mode. Select 'NO' to enable auto authorization of third party payment transactions in the selected mode.
- Transactions for which third party delivery has been specified. Select 'YES' in the Restrict Third Party Delivery Transactions field to disable auto authorization of third party delivery transactions in the selected mode. Select 'NO' to enable auto authorization of third party delivery transactions in the selected mode.

- When you have finished making the auto-authorization specification for a user group, click save icon to save your changes.
- When you have finished making your auto-authorization specifications for each user group in this screen, and saved your changes, the auto-authorization feature is enabled, and when the user invokes the Save operation in any of the applicable task screens, the entered records are saved as authorized records.
- To enable auto authorization for a user group other than the logged in user group, click save icon in the Auto Auth Maintenance screen. The system displays the message as “Do you want to cancel the operation?”

Click on the ‘OK’ button. The auto authorization record of the logged in user group, which was on display, is closed, and the Auto Auth Maintenance screen is opened in New mode.

The screenshot shows the 'Auto Auth' window with a 'Save' form. The form contains the following fields and controls:

- Group Id ***: Text input field with a search icon.
- Module Id ***: Text input field with a search icon.
- Task Code ***: Text input field with a search icon.
- Task Description**: Text input field.
- Limit Currency**: Text input field with a search icon.
- Limit Amount**: Text input field.
- New**: Dropdown menu with 'No' selected.
- Modify**: Dropdown menu with 'No' selected.

Below the form is a table titled 'Additional Setup Details' with the following content:

	Restricted Transaction *	Description
<input checked="" type="checkbox"/>		
<input checked="" type="checkbox"/>		

At the bottom of the window, there are fields for 'Input by', 'DateTime', 'Mod No', 'Open', 'Authorized by', and 'Authorized', along with a 'Cancel' button.

Select the user group for which you want to enable or disable the auto authorization rights, in the Group ID field. Select the corresponding module in the Module ID field, and click on ‘OK’ button.

Subsequently, proceed to set up the auto authorization rights in the same manner as described above, for the amend operation.

Auto auth setup can be done based on additional information like whether transaction is as follows:

- Backdated Transaction
- Load Overridden Transaction
- Third Party Payment Transaction
- Third Party Delivery Transaction

Auto Auth maintenance can be setup based on Fund and RPO code in FBC Access Restriction Detail [UTDFAR] along with Access Restriction Information.

AutoAuthSetuptbl

The auto auth set up table is as follows:

Description	Function Id	Control String	Limit Applicable
Adjustment Subscription	UTDADJ02	101111111	Y
Adjustment Redemption	UTDADJ03	101111111	Y
Block	UTDTXN06	101111111	Y
Consolidation	UTDTXN08	101111111	Y
Switch	UTDTXN04	101111111	Y
Unblock	UTDTXN07	101111111	Y
IPO Subscription	UTDTXN01	101111111	Y
Subscription	UTDTXN02	101111111	Y
Reissue	UTDTXN10	101111111	Y
Redemption	UTDTXN03	101111111	Y
Split	UTDTXN09	101111111	Y
Transfer	UTDTXN05	101111111	Y

AutoAuthAddInfoTbl

The auto auth additional info table is as follows:

Description	Function Id
Adjustment Subscription	UTDADJ02
Adjustment Redemption	UTDADJ03
Block	UTDTXN06
Consolidation	UTDTXN08
Switch	UTDTXN04
Unblock	UTDTXN07
IPO Subscription	UTDTXN01
Subscription	UTDTXN02
Reissue	UTDTXN10
Redemption	UTDTXN03
Split	UTDTXN09
Transfer	UTDTXN05

4.2.3 Operations on Auto Authorization Records

After you have set up auto authorization for a user group, you must have another user authorize it so that it would be effective in the system.

Before the setup is authorized, you can edit its details as many times as necessary. You can also delete it before it is authorized.

After authorization, you can only make changes to any of the details through an amendment.

The Auto Auth Maintenance screen can be used for the following operations on auto authorization setups:

- Retrieval for viewing
- Editing unauthorized setups
- Deleting unauthorized setups
- Authorizing setups
- Amending authorized setups.

To perform these operations, click on the appropriate buttons in the horizontal array of buttons in the Auto Auth Maintenance screen.

5. External System Maintenance

Integration of different applications and solutions is a key area in today's systems. A variety of specialized applications deployed on disparate platforms and using different infrastructure need to be able to communicate and integrate seamlessly with FCIS, in order to exchange data. FCIS facilitates maintenance of such integration in the following screens:

- External System Maintenance
- External System Functions
- Message Media Maintenance
- Media Control System Maintenance

This chapter contains the following sections:

- [Section 5.1, "External System"](#)
- [Section 5.2, "External System Details"](#)
- [Section 5.3, "External System Functions"](#)
- [Section 5.4, "External System Details"](#)
- [Section 5.5, "Message Media"](#)
- [Section 5.6, "Message Media Details"](#)
- [Section 5.7, "Media Control System"](#)
- [Section 5.8, "Media Control System Details"](#)
- [Section 5.9, "Amendment Details"](#)
- [Section 5.10, "Amendment Details Retrieval"](#)
- [Section 5.11, "Events Log"](#)
- [Section 5.12, "Events Log"](#)
- [Section 5.13, "Integration Parameter Maintenance Screen"](#)
- [Section 5.14, "Upload Source Maintenance"](#)
- [Section 5.15, "Source Preferences Maintenance"](#)
- [Section 5.16, "Notification Enroute Maintenance"](#)

5.1 External System

This section contains the following topics:

- [Section 5.1.1, "Maintaining External System"](#)

5.1.1 Maintaining External System

You need to maintain an external system that will communicate with FCIS. You can maintain and modify these parameters 'External System Maintenance' screen. You can invoke this

screen by typing 'UTDEXSYS' in the field at the top right corner of the Application tool bar and clicking the adjoining arrow button.

The screenshot shows the 'External System Details' configuration window. It includes sections for 'External System', 'Correlation Pattern', 'Message Exchange Pattern', and 'Queue'. The 'External System' section has a red asterisk next to the 'External System *' field. The 'Correlation Pattern' section has a 'Request' dropdown menu set to 'Message ID'. The 'Message Exchange Pattern' section has 'Request Message' and 'Response Message' dropdown menus set to 'Full Screen', and a checkbox for 'XSD Validation Required'. The 'Queue' section has 'Default Response Queue' and 'Dead Letter Queue' fields, and a checkbox for 'Register Response Queue Message Id'. Below these sections is a table titled 'External System Queues' with columns for 'In Queue *' and 'Response Queue', containing one row with checkboxes. At the bottom, there are fields for 'Input by', 'Authorized by', 'DateTime', 'Mod No', 'Open', and 'Authorized', along with a 'Cancel' button.

The various parameters that can be maintained in this screen are described below.

External System

You can maintain the following parameters here:

External System

Alphanumeric; 12 Characters; Mandatory

Specify a name for the external system. This should be the same as the Source in an incoming message.

Description

Alphanumeric; 35 Characters; Mandatory

Specify a brief description for the External System.

Correlation Pattern

You can maintain the following parameters here:

Request

Mandatory

Select a way in which the external system should correlate its request message with the response message, from the adjoining drop-down list. This list displays the following values:

- Message ID – Select if you want to use message ID of a request message as the Correlation ID in the corresponding response message.
- Correlation ID – Select if you want to maintain Correlation ID of a request message as the Correlation ID of the corresponding response message.

Message Exchange Pattern

You can maintain the following parameters here:

Request Message

Mandatory

Select a pattern for the generated request message from the adjoining drop-down list. This list displays the following values:

- Full Screen – Select if you want to view the full screen of the request message.
- Input Only – Select if you want to view only the input of the request message.

Note

If you select 'Full Screen' as the request message, the response message will also display 'Full Screen'.

Response Message

Mandatory

Select a pattern for the generated response message from the adjoining drop-down list. This list displays the following values:

- Full Screen – Select if you have selected 'Full Screen' for the request message.
- Record Identification Msg – Select if you have selected 'Input Only' for the request message.

Queue

You can maintain the following parameters here:

Default Response Queue

Alphanumeric; 105 Characters; Optional

Specify a valid response queue name as the default response queue, for each of the 'In Queue' through which the External System will communicate with FCIS.

Dead Letter Queue

Alphanumeric; 105 Characters; Optional

Specify a valid queue as dead letter queue to direct the received messages which are non-readable.

Note

If the Dead Letter Queue is not defined, such messages will be redirected to a queue with the name of the request queue appended with '_E'.

XSD Validation Required

Optional

Check this box if you want to validate the request message against its corresponding XSD.

Register Response Queue Message ID

Optional

Check this box if you want to log the message ID, which is provided by the Response Queue, when a response message is posted into the queue.

External System Queues

You can maintain the following parameters here:

In Queue

Alphanumeric; 105 Characters; Mandatory

Specify the name of the queue from which the messages were received. The name of the queue will help identify the external system.

Note

- This is required only if an incoming message does not display the source of the message. An In Queue is mapped to only one External System.
 - You can map multiple queues to a source. System will allow a source to post messages to multiple queues.
-

Response Queue

Alphanumeric; 105 Characters; Mandatory

Specify a valid response queue to display the queue name on posting a request message into the In Queue, when the External System fails. Response queue can be maintained for every In Queue.

5.2 External System Details

This section contains the following topics:

- [Section 5.2.1, "Retrieving External System Details"](#)
- [Section 5.2.2, "Viewing External System Details"](#)
- [Section 5.2.3, "Deleting External System Details"](#)
- [Section 5.2.4, "Modifying External System Details"](#)
- [Section 5.2.5, "Authorizing External System Details"](#)

5.2.1 Retrieving External System Details

You can view, modify, delete and authorize External system details in the 'External System Summary' screen. You can invoke this screen by typing 'UTSEXSYS' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button.

The screenshot shows the 'External System Summary' application window. At the top, there is a search bar with buttons for 'Search', 'Advanced Search', 'Reset', and 'Clear All'. Below the search bar, there is a section for search criteria: 'Search Is Case Sensitive' (checkbox), 'Authorized' (dropdown), 'Open' (dropdown), 'External System' (text input with a search icon), 'Default Response Queue' (text input with a search icon), and 'Dead Letter Queue' (text input with a search icon). A table below the search criteria shows 'Records per page' set to 15, '1 of 1' records, and a 'Go' button. The table has columns for 'Authorized', 'Open', 'External System', 'Default Response Queue', and 'Dead Letter Queue'. The table is currently empty. An 'Exit' button is located in the bottom right corner of the window.

You can perform the following actions using this screen

5.2.2 Viewing External System Details

You can view previously entered details of external system in the 'External System Summary' screen, as follows:

- Specify any or all of the following details in the 'External System Summary' screen:
 - The status of the record in the Authorization Status field. If you choose the 'Blank Space' option, then all the records that involve the specified External System are retrieved.
 - The status of the record in the Open field. If you choose the 'Blank Space' option, then all the records that involve the specified External System are retrieved.
 - External System
 - Default Response Queue
 - Dead Letter Queue

Click 'Search' button to view the records. All records with the specified details are retrieved and displayed in the lower portion of the screen.

You can also search the record by using combination of % and alphanumeric value.

5.2.3 Deleting External System Details

You can delete only unauthorized records in the system. To delete a record that you have previously entered:

- Invoke the 'External System Summary' screen from the Browser.
- Select the status of the record that you want to retrieve for deletion.
- Specify any or all of the details and click 'Search' button. All records with the specified details are retrieved and displayed in the lower portion of the screen.
- Double click the record that you want to delete. The 'External System Maintenance' screen is displayed.
- Select Delete operation from the Action list. The system prompts you to confirm the deletion, and the record is deleted physically from the system database.

5.2.4 Modifying External System Details

You can modify only unauthorized records in the system. To modify a record that you have previously entered:

- Invoke the 'External System Summary' screen from the Browser.
- Select the status of the record that you want to retrieve for modification.
- Specify any or all of the details and click 'Search' button. All records with the specified details are retrieved and displayed in the lower portion of the screen.
- Double click the record that you want to modify. The 'External System Maintenance' screen is displayed.
- Select Edit operation from the Action list and modify the details. After modifying the details, click Save to save the modifications.

You can edit External System details as many times as necessary before you authorize it.

5.2.5 Authorizing External System Details

You can authorize records in the system. To authorize a record that you have previously entered:

- Invoke the 'External System Summary' screen from the Browser.
- Select the status of the record that you want to retrieve for authorization.
- Specify any or all of the details and click 'Search' button. All records with the specified details are retrieved and displayed in the lower portion of the screen.
- Double click the record that you want to authorize. The 'External System Maintenance' screen is displayed.
- Select authorize operation from the Action list. The system prompts you to confirm the authorization, and the record is authorized.

5.3 External System Functions

This section contains the following topics:

- [Section 5.3.1, "Maintaining External System Functions"](#)

5.3.1 Maintaining External System Functions

You can define access rights to an external system using the 'External System Functions' screen. You can invoke this screen by typing "UTDEXFUN" in the field at the top right corner of the Application tool bar and clicking the adjoining arrow button.

Input by	DateTime	Mod No	Open
Authorized by	DateTime		Authorized

You can specify the following details:

External System

Alphanumeric; 12 Characters; Mandatory

Specify an external system for which you wish to provide access rights from the adjoining option list. The adjoining option list displays all the external systems you have maintained at the 'External Systems Maintenance' level.

Description

Alphanumeric; 105 Characters; Mandatory

Description of the specified external system is defaulted here.

Function ID

Alphanumeric; 8 Characters; Mandatory

Specify a valid function ID from the adjoining option list. The function IDs are invoked from Gateway Functions.

Action

Alphanumeric; 10 Characters; Mandatory

Select an action for the external system from the adjoining option list.

Service Name

Alphanumeric; 50 Characters; Optional

Service name is defaulted here based on the specified Function ID and Action.

Operation Code

Alphanumeric; 50 Characters; Optional

Operation Code is defaulted here based on the specified Function ID and Action.

5.4 External System Details

This section contains the following topics:

- [Section 5.4.1, "Retrieving External System Details"](#)
- [Section 5.4.2, "Viewing External System Functions Details"](#)
- [Section 5.4.3, "Deleting External System Functions Details"](#)
- [Section 5.4.4, "Modifying External System Function Details"](#)
- [Section 5.4.5, "Authorizing External System Function Details"](#)

5.4.1 Retrieving External System Details

You can view, modify, delete and authorize external system function details in the 'External System Functions Summary' screen. You can invoke this screen by typing 'UTSEXFUN' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button.

Authorized	Open	External System	Function	Action
------------	------	-----------------	----------	--------

5.4.2 Viewing External System Functions Details

You can view previously entered details of external system in the 'External System Functions Summary' screen, as follows:

- Specify any or all of the following details in the 'External System Functions Summary' screen:
 - The status of the record in the Authorization Status field. If you choose the 'Blank Space' option, then all the records that involve the specified External System Functions are retrieved.
 - The status of the record in the Open field. If you choose the 'Blank Space' option, then all the records that involve the specified External System Functions are retrieved.
 - External System
 - Function
 - Action

Click 'Search' button to view the records. All records with the specified details are retrieved and displayed in the lower portion of the screen.

You can also search the record by using combination of % and alphanumeric value.

5.4.3 Deleting External System Functions Details

You can delete only unauthorized records in the system. To delete a record that you have previously entered:

- Invoke the 'External System Functions Summary' screen from the Browser.
- Select the status of the record that you want to retrieve for deletion.
- Specify any or all of the details and click 'Search' button. All records with the specified details are retrieved and displayed in the lower portion of the screen.
- Double click the record that you want to delete. The 'External System Functions Maintenance' screen is displayed.
- Select Delete operation from the Action list. The system prompts you to confirm the deletion, and the record is deleted physically from the system database.

5.4.4 Modifying External System Function Details

You can modify only unauthorized records in the system. To modify a record that you have previously entered:

- Invoke the 'External System Functions Summary' screen from the Browser.
- Select the status of the record that you want to retrieve for modification.
- Specify any or all of the details and click 'Search' button. All records with the specified details are retrieved and displayed in the lower portion of the screen.
- Double click the record that you want to modify. The 'External System Functions Maintenance' screen is displayed.
- Select Edit operation from the Action list and modify the details. After modifying the details, click Save to save the modifications.

You can edit External System details as many times as necessary before you authorize it.

5.4.5 Authorizing External System Function Details

You can authorize records in the system. To authorize a record that you have previously entered:

- Invoke the 'External System Functions Summary' screen from the Browser.
- Select the status of the record that you want to retrieve for authorization.
- Specify any or all of the details and click 'Search' button. All records with the specified details are retrieved and displayed in the lower portion of the screen.
- Double click the record that you want to authorize. The 'External System Functions Maintenance' screen is displayed.
- Select authorize operation from the Action list. The system prompts you to confirm the authorization, and the record is authorized.

5.5 Message Media

This section contains the following topics:

- [Section 5.5.1, "Maintaining Message Media"](#)

5.5.1 Maintaining Message Media

FCIS facilitates maintenance of different media through which advices and messages can be generated. At your bank, you can only receive or route messages through a media that you have maintained in this screen. These specifications can be made only at the main branch and will be applicable to all the branches of your bank.

You can maintain standard media like Mail, Telex and SWIFT and also other media like CHIPS or any other country or customer specific media from which the messages will be routed. You can invoke the 'Message Media Maintenance' screen by typing 'UTDMEDIA' in

the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button

Message Media Detail

Save

Media Code *

Media Number *

Description * ⓘ

Message Suffix ⓘ

Message Terminator ⓘ

Number of Characters Media Priority

Test Word Required

Stop Processing

Padding Required

XML Message

Input by DateTime Mod No Open

Authorized by DateTime Authorized

Cancel

In this screen, you can maintain the following:

- The media types that can be used to transmit messages from and to your bank
- The compatible media for the media type you are maintaining

Media Code

Alphanumeric; 15 Characters; Mandatory

Specify a unique code to identify the media.

When you want to transit a message through a particular media type, you just have to specify the code assigned to the media type. The message will be routed automatically through the media.

Media Number

Numeric; 15 Characters; Mandatory

Specify a unique number with which you want to represent the media.

Description

Alphanumeric; 35 Characters; Mandatory

Specify description for the specified media code. The description will help you identify the code that it represents.

Message Suffix

Alphanumeric; 200 Characters; Optional

Specify padding characters which you want to add to the end of every outgoing message, automatically. The specified padding characters will be inserted, automatically, at the end of every outgoing message in the media.

Message Terminator

Alphanumeric; 100 characters; Optional

Specify padded characters that mark the end of the incoming messages in a media. The system identifies the end of an incoming message, in a file containing several messages, when it encounters the padding characters that you have specified for a media type.

Number of Characters

Numeric; 3 Characters; Optional

Specify the number of times you want to repeat the set of specified padding characters, if you opted to suffix an outgoing message with a set of padding characters.

The padding characters will be suffixed to every outgoing message in the media as many times as you specify.

Media Priority

Numeric; 2 Characters; Mandatory

Specify usage priority for each media type that you maintain. When dispatching messages to customers, the media type used for sending the message will be the one that is higher on the priority rating.

Test Word Required

Optional

Check this option if you want to insert the test word to the telex message manually before it is generated from your branch.

Stop Processing

Optional

Check this box if you want to stop the processing for the incoming and outgoing messages.

Padding Required

Optional

Check this box if you want to add the suffix to the outgoing messages.

5.6 Message Media Details

This section contains the following topics:

- [Section 5.6.1, "Retrieving Message Media Details"](#)
- [Section 5.6.2, "Viewing Message Media Details"](#)
- [Section 5.6.3, "Deleting Message Media Details"](#)
- [Section 5.6.4, "Modifying Message Media Details"](#)
- [Section 5.6.5, "Authorizing Message Media Details"](#)

5.6.1 Retrieving Message Media Details

You can view, modify, delete and authorize external system function details in the 'Message Media Summary' screen. You can invoke this screen by typing 'UTSMEDIA' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button.

Message Media Summary

Search Advanced Search Reset Clear All

Search Is Case Sensitive

Authorized Open

Media Code Description

Media Number

Records per page: 15 1 of 1 Lock Columns: 0

Authorized	Open	Media Code	Description	Media Number
------------	------	------------	-------------	--------------

Exit

You can perform the following actions using this screen

5.6.2 Viewing Message Media Details

You can view previously entered details of external system in the 'Message Media Summary' screen, as follows:

- Specify any or all of the following details in the 'Message Media Summary' screen:
 - The status of the record in the Authorization Status field. If you choose the 'Blank Space' option, then all the records that involve the specified Message Media are retrieved.
 - The status of the record in the Open field. If you choose the 'Blank Space' option, then all the records that involve the specified Message Media are retrieved.
 - Media Code
 - Description
 - Media Number

Click 'Search' button to view the records. All records with the specified details are retrieved and displayed in the lower portion of the screen.

You can also search the record by using combination of % and alphanumeric value.

5.6.3 Deleting Message Media Details

You can delete only unauthorized records in the system. To delete a record that you have previously entered:

- Invoke the 'Message Media Summary' screen from the Browser.
- Select the status of the record that you want to retrieve for deletion.
- Specify any or all of the details and click 'Search' button. All records with the specified details are retrieved and displayed in the lower portion of the screen.
- Double click the record that you want to delete. The 'Message Media Maintenance' screen is displayed.
- Select Delete operation from the Action list. The system prompts you to confirm the deletion, and the record is deleted physically from the system database.

5.6.4 Modifying Message Media Details

You can modify only unauthorized records in the system. To modify a record that you have previously entered:

- Invoke the 'Message Media Summary' screen from the Browser.
- Select the status of the record that you want to retrieve for modification.
- Specify any or all of the details and click 'Search' button. All records with the specified details are retrieved and displayed in the lower portion of the screen.
- Double click the record that you want to modify. The 'Message Media Maintenance' screen is displayed.
- Select Edit operation from the Action list and modify the details. After modifying the details, click Save to save the modifications.

You can edit External System details as many times as necessary before you authorize it.

5.6.5 Authorizing Message Media Details

You can authorize records in the system. To authorize a record that you have previously entered:

- Invoke the 'Message Media Summary' screen from the Browser.
- Select the status of the record that you want to retrieve for authorization.
- Specify any or all of the details and click 'Search' button. All records with the specified details are retrieved and displayed in the lower portion of the screen.
- Double click the record that you want to authorize. The 'Message Media Maintenance' screen is displayed.
- Select authorize operation from the Action list. The system prompts you to confirm the authorization, and the record is authorized.

5.7 Media Control System

This section contains the following topics:

- [Section 5.7.1, "Maintaining Media Control System"](#)

5.7.1 Maintaining Media Control System

The messages that are sent from and delivered to your bank are transmitted and received over sources that are external to FCIS. We shall call these external sources Media Control Systems (MCS).

In a distributed environment, the database of a branch is located in a node or server. The MCS of the messages are also installed in a node. Thus, while defining an MCS, you also need to indicate the node in which it is installed.

An MCS can handle only one media, hence you need to set up several media control systems for the various media types maintained for your bank. Apart from indicating the media type for an MCS, you can also indicate separate directories from which FCIS should read and write incoming and outgoing messages, for a given media.

You can invoke 'Media Control System Maintenance' screen by typing 'UTDMCS' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button.

Input by	DateTime	Mod No	Open
Authorized by	DateTime		Authorized

You can maintain the following parameters here:

Node

Alphanumeric; 3 Characters; Mandatory

Specify a node or server at which the MCS is located, from the adjoining option list. A node is the Database instance on which FCIS is installed. A branch's database is located in a node and an MCS is also installed in a node.

Media Control System

Alphanumeric; 15 Characters; Mandatory

Specify a unique code for MCS to identify the external source. You can follow your own convention for devising this code.

Media

Alphanumeric; 15 Characters; Mandatory

Specify the media for which your bank is using the MCS, from the adjoining option list. The option-list displays the media codes maintained at the 'Message Media Maintenance' level.

Status

Mandatory

Select a valid status of an MCS from the adjoining drop-down list. This list displays the following values:

- Active – Select if you want to direct the messages through MCS.
- Passive – Select if you do not want to direct any message to through MCS. If the status of MCS is passive, then FCIS will not write into or read from the directories on the node.

Delivery Type

Mandatory

Select a valid type of delivery from the options. The following options are available for selection:

- Folder – If you select this option, you must specify the 'In Directory' and 'Out Directory' for Windows Server. Further, after selecting this option, if you check the option 'Unix Swift Server' for a UNIX SWIFT server, then you must specify the 'Unix In-Directory' and the 'Unix Out-Directory'.
- Queue – If you select this option, you must specify 'In Queue', 'Out Queue' and select a valid type of queue from the options. The following options are available for selection:
 - Microsoft Message Queue – Select if you want to maintain Microsoft message queue.
 - WebSphere Messaging Queue – Select if you want to maintain WebSphere message queue.

In Directory

Alphanumeric; 100 Characters; Optional

Specify the full path of the directory from which FCIS should read and write incoming message, if you have maintained the Delivery Type as 'Folder' and the SWIFT server as Windows server.

Out Directory

Alphanumeric; 100 Characters; Optional

Specify the full path of the directory from which FCIS should read and write outgoing message, if you have maintained the Delivery Type as 'Folder' and the SWIFT server as Windows server.

File Prefix

Alphanumeric; 1 Character; Optional

Specify a unique identifier for the specified MCS to identify the outgoing message files generated in a different media.

Unix-In-Directory

Alphanumeric; 100 Characters; Optional

Specify the full path of the directory on the SWIFT server where you would like to store incoming SWIFT message hand-off files. The system will pickup and process all incoming SWIFT message files from this directory.

Unix-Out-Directory

Alphanumeric; 100 Characters; Optional

Specify the full path of the directory on the SWIFT server where you would like to store outgoing SWIFT message hand-off files.

In Queue

Alphanumeric; 100 Characters; Optional

Specify the full path of the queue in the node or server into which the MCS should store the incoming message hand-off file, if the Delivery type is Queue. The system will pickup and read all incoming messages transmitted through the specified media from this queue, by default

Out Queue

Alphanumeric; 100 Characters; Optional

Specify the full path of the queue in the node or server into which the message hand-off file from the system, for the specified media, should be stored. The MCS, which is also located on the same node, will store the outgoing messages in this queue by default.

Unix Swift Server

Optional

Check this box if the SWIFT server at your Bank is on UNIX.

5.8 Media Control System Details

This section contains the following topics:

- [Section 5.8.1, "Retrieving Media Control System Details"](#)
- [Section 5.8.2, "Viewing Media Control System Details"](#)
- [Section 5.8.3, "Deleting Media Control System Details"](#)
- [Section 5.8.4, "Modifying Media Control System Details"](#)
- [Section 5.8.5, "Authorizing Media Control System Details"](#)

5.8.1 Retrieving Media Control System Details

You can view, modify, delete and authorize external system function details in the 'Media Control System Summary' screen. You can invoke this screen by typing 'UTSMCS' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button.

Media Control Systems Summary

Search Advanced Search Reset Clear All

Search Is Case Sensitive

Authorized Open

Node Media Control System

Media

Records per page 15 1 of 1 Go Lock Columns 0

Authorized	Open	Node	Media Control System	Media
------------	------	------	----------------------	-------

Exit

You can perform the following actions using this screen.

5.8.2 Viewing Media Control System Details

You can view previously entered details of external system in the 'Media Control System Summary' screen, as follows:

- Specify any or all of the following details in the 'Media Control System Summary' screen:
 - The status of the record in the Authorization Status field. If you choose the 'Blank Space' option, then all the records that involve the specified Media Control System are retrieved.
 - The status of the record in the Open field. If you choose the 'Blank Space' option, then all the records that involve the specified Media Control System are retrieved.
 - Node
 - Media Control System
 - Media

Click 'Search' button to view the records. All records with the specified details are retrieved and displayed in the lower portion of the screen.

You can also search the record by using combination of % and alphanumeric value.

5.8.3 Deleting Media Control System Details

You can delete only unauthorized records in the system. To delete a record that you have previously entered:

- Invoke the 'Media Control System Summary' screen from the Browser.
- Select the status of the record that you want to retrieve for deletion.
- Specify any or all of the details and click 'Search' button. All records with the specified details are retrieved and displayed in the lower portion of the screen.
- Double click the record that you want to delete. The 'Media Control System Maintenance' screen is displayed.
- Select Delete operation from the Action list. The system prompts you to confirm the deletion, and the record is deleted physically from the system database.

5.8.4 Modifying Media Control System Details

You can modify only unauthorized records in the system. To modify a record that you have previously entered:

- Invoke the 'Media Control System Summary' screen from the Browser.
- Select the status of the record that you want to retrieve for modification.
- Specify any or all of the details and click 'Search' button. All records with the specified details are retrieved and displayed in the lower portion of the screen.
- Double click the record that you want to modify. The 'Media Control System Maintenance' screen is displayed.
- Select Edit operation from the Action list and modify the details. After modifying the details, click Save to save the modifications.

You can edit External System details as many times as necessary before you authorize it.

5.8.5 Authorizing Media Control System Details

You can authorize records in the system. To authorize a record that you have previously entered:

- Invoke the 'Media Control System Summary' screen from the Browser.
- Select the status of the record that you want to retrieve for authorization.
- Specify any or all of the details and click 'Search' button. All records with the specified details are retrieved and displayed in the lower portion of the screen.
- Double click the record that you want to authorize. The 'Media Control System Maintenance' screen is displayed.
- Select authorize operation from the Action list. The system prompts you to confirm the authorization, and the record is authorized.

5.9 Amendment Details

This section contains the following topics:

- [Section 5.9.1, "Maintaining Amendment Details"](#)

5.9.1 Maintaining Amendment Details

FCIS facilitates maintenance of nodes and fields which are amended through external system. You can invoke this screen by typing 'UTDAMDMT' in the field at the top right corner of the Application tool bar and clicking the adjoining arrow button.

The screenshot shows the 'Amendment Details' application window. It features a 'Save' button at the top left. Below it are four input fields: 'External System *', 'Operation *', 'Service Name', and 'Operation Code', each with a search icon. The 'Amend Nodes' section contains a table with columns: 'Node Name *', 'New Allowed' (Yes/No), 'Deleted Allowed' (Yes/No), and 'All Records' (Yes/No). The 'Amend Fields' section contains a table with a column: 'Field Name *'. The footer section includes labels for 'Input by', 'Authorized by', 'DateTime', 'Mod No', 'Open', and 'Authorized', along with a 'Cancel' button.

You can maintain the following parameters here:

External System

Alphanumeric; 12 Characters; Mandatory

Select an external system for which amendable maintenance is done, from the adjoining option list.

Operation

Alphanumeric; Mandatory

Specify the Gateway operation for which Amendable maintenance is done.

Service Name

Alphanumeric; 50 Characters; Optional

Select the service name for which amendable maintenance is done, from the adjoining option list.

Operation Code

Alphanumeric; 50 Characters; Optional

Select the operation code from the adjoining option list.

Amend Nodes

Node Name

Specify the name of the node which can be amended through external system. The adjoining option list displays the list of nodes.

New Allowed

New Allowed indicates whether new records can be added in the node.

Deleted Allowed

Delete Allowed indicates whether existing records can be deleted from the node.

Amend Fields

Field Name

Specify the field name which can be amended through external system. The adjoining option list displays the list of the fields in the node.

5.10 Amendment Details Retrieval

This section contains the following topics:

- [Section 5.10.1, "Retrieving Amendment Details"](#)
- [Section 5.10.2, "Viewing Amendment Details"](#)
- [Section 5.10.3, "Deleting Amendment Details"](#)
- [Section 5.10.4, "Modifying Amendment Details"](#)
- [Section 5.10.5, "Authorizing Amendment Details"](#)

5.10.1 Retrieving Amendment Details

You can view, modify, delete and authorize external system details in the 'Amendment Maintenance Summary' screen. You can invoke this screen by typing 'UTSAMDMT' in the

field at the top right corner of the Application tool bar and clicking on the adjoining arrow button.

Amendment Maintenance

Search Advanced Search Reset Clear All

Search Is Case Sensitive

Authorized Open

External System Operation

Records per page 15 1 of 1 Go Lock Columns 0

Authorized	Open	External System	Operation
------------	------	-----------------	-----------

Exit

5.10.2 Viewing Amendment Details

You can view previously entered details of external system in the 'Amendment Maintenance Summary' screen, as follows:

- Specify any or all of the following details in the 'Amendment Maintenance Summary' screen:
 - The status of the record in the Authorization Status field. If you choose the 'Blank Space' option, then all the records that involve the specified External System are retrieved.
 - The status of the record in the Open field. If you choose the 'Blank Space' option, then all the records that involve the specified External System are retrieved.
 - External System
 - Operation

Click 'Search' button to view the records. All records with the specified details are retrieved and displayed in the lower portion of the screen.

You can also search the record by using combination of % and alphanumeric value.

5.10.3 Deleting Amendment Details

You can delete only unauthorized records in the system. To delete a record that you have previously entered:

- Invoke the 'Amendment Maintenance Summary' screen from the Browser.
- Select the status of the record that you want to retrieve for deletion.
- Specify any or all of the details and click 'Search' button. All records with the specified details are retrieved and displayed in the lower portion of the screen.
- Double click the record that you want to delete. The 'Amendment Details' screen is displayed.
- Select Delete operation from the Action list. The system prompts you to confirm the deletion, and the record is deleted physically from the system database.

5.10.4 Modifying Amendment Details

You can modify only unauthorized records in the system. To modify a record that you have previously entered:

- Invoke the 'Amendment Maintenance Summary' screen from the Browser.
- Select the status of the record that you want to retrieve for modification.
- Specify any or all of the details and click 'Search' button. All records with the specified details are retrieved and displayed in the lower portion of the screen.
- Double click the record that you want to modify. The 'Amendment Details' screen is displayed.
- Select Edit operation from the Action list and modify the details. After modifying the details, click Save to save the modifications.

You can edit External System details as many times as necessary before you authorize it.

5.10.5 Authorizing Amendment Details

You can authorize records in the system. To authorize a record that you have previously entered:

- Invoke the 'Amendment Maintenance Summary' screen from the Browser.
- Select the status of the record that you want to retrieve for authorization.
- Specify any or all of the details and click 'Search' button. All records with the specified details are retrieved and displayed in the lower portion of the screen.
- Double click the record that you want to authorize. The 'Amendment Details' screen is displayed.
- Select authorize operation from the Action list. The system prompts you to confirm the authorization, and the record is authorized.


5.11 Events Log

This section contains the following topics:

- [Section 5.11.1, "Invoking Events Log Screen"](#)

5.11.1 Invoking Events Log Screen

You can invoke 'Events' screen by typing 'SMREVNLO' in the field at the top right corner of the Application tool bar and clicking the adjoining arrow button.

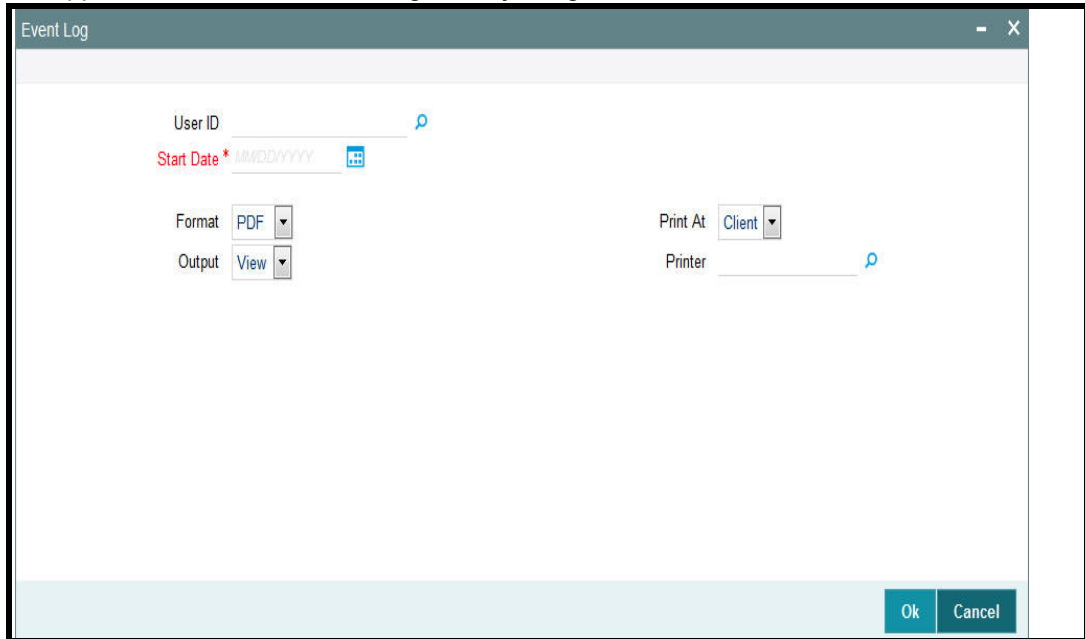

The screenshot shows a window titled "Event Log" with a search bar at the top right. Below the search bar, there are several input fields and dropdown menus: "User ID" with a search icon, "Start Date" with a red asterisk and a date picker icon, "Format" with a dropdown menu showing "PDF", "Output" with a dropdown menu showing "View", "Print At" with a dropdown menu showing "Client", and "Printer" with a search icon. At the bottom right, there are "Ok" and "Cancel" buttons.

In this screen, you must specify the following as mandatory parameters for the generation of the report:

- User ID
- Start Date

The system will generate the event logs after specifying the mandatory details.


5.12 Events Log

This section contains the following topics:

- [Section 5.12.1, "Invoking Events Log Screen"](#)

5.12.1 Invoking Events Log Screen

You can invoke 'Events' screen by typing 'SMRPEVLG' in the field at the top right corner of the Application tool bar and clicking the adjoining arrow button.

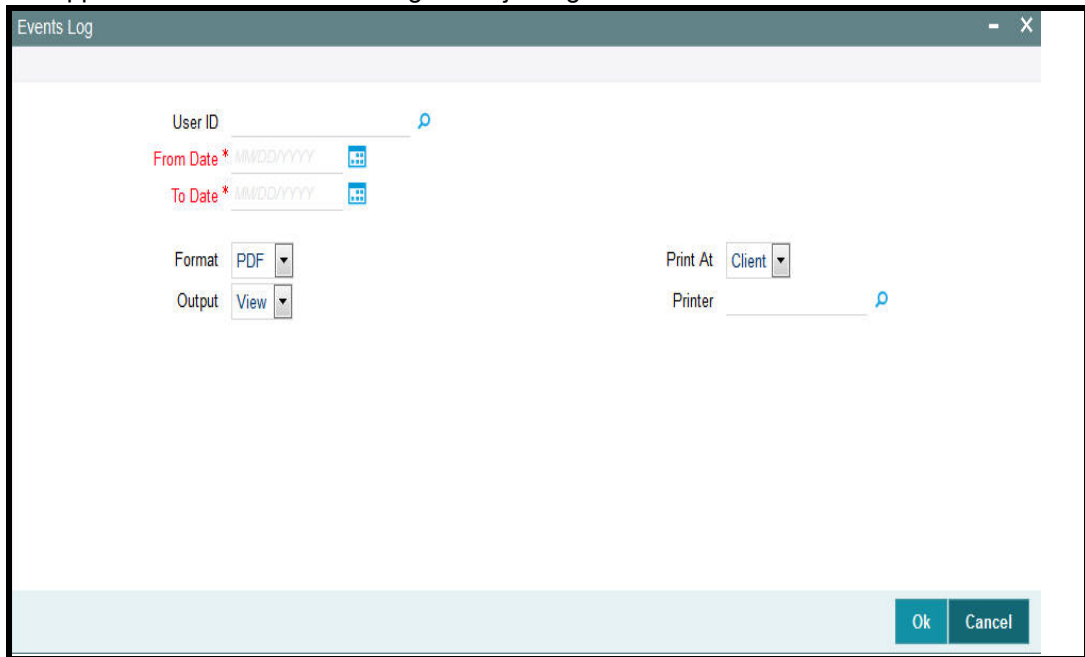

The screenshot shows a window titled "Events Log" with a search bar at the top right. Below the search bar, there are several input fields and dropdown menus:

- User ID: A text input field with a search icon.
- From Date*: A date input field with a calendar icon and a red asterisk.
- To Date*: A date input field with a calendar icon and a red asterisk.
- Format: A dropdown menu with "PDF" selected.
- Output: A dropdown menu with "View" selected.
- Print At: A dropdown menu with "Client" selected.
- Printer: A text input field with a search icon.

At the bottom right of the window, there are two buttons: "Ok" and "Cancel".

In this screen, you must specify the following as mandatory parameters for the generation of the report:

- User ID
- Start Date

The system will generate the event logs after specifying the mandatory details.

5.13 Integration Parameter Maintenance Screen

This section contains the following topic:

- [Section 5.13.1, "Invoking Integration Parameter Maintenance Screen"](#)

5.13.1 Invoking Integration Parameter Maintenance Screen

You can invoke 'Integration Parameter Maintenance' screen by typing 'IFDINPRM' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button.

Integration Parameter Maintenance Screen

Save

Branch Code*

Param Text

External System*

Param Text

Amount Block Validation Required

Offset Required

Offset Netting Required

Accounting Netting Required

Allow Force Post

Auto Auth

1 of 1 Go

Service Name	Communication Channel	Communication Mode	Communication Layer	WS Service Name	WS Port	WS EndPoint URL
<input checked="" type="checkbox"/>	CUSTOM	SYNCHRONOUS	Application			

Input by _____ DateTime _____ Mod No _____ Open _____

Authorized by _____ DateTime _____ Authorized _____

Ok Cancel

You can specify the following details:

Branch Code

Alphanumeric; 3 Characters; Mandatory

Specify the branch code. Alternatively, you can select the branch code from the option list. The list displays all valid branch codes maintained in the system.

Param Text

Display

The system displays the description for the selected branch code.

External System

Alphanumeric; 16 Characters; Mandatory

Specify the external system details. Alternatively, you can select the external system details from the option list. The list display all valid external system details maintained in the system.

Param Text

Display

The system displays the description for the selected external system.

Amount Block Validation Required

Mandatory

Check this box if amount block validation is required.

Offset Required

Mandatory

Check this box if offset is required.

Offset Netting Required

Mandatory

Check this box if offset netting is required.

Accounting Netting Required

Mandatory

Check this box if accounting netting is required.

Allow Force Post

Mandatory

Check this box if force post is allowed.

Auto Auth

Mandatory

Check this box if auto authorization is required.

Service Name

Alphanumeric; 35 Characters; Mandatory

Specify the service name.

Communication Channel

Optional

Select the communication channel from the drop-down list. The list displays the following values:

- Custom
- Webservice
- MDB
- Internal

Communication Mode

Optional

Select the communication mode from the drop-down list. The list displays the following values:

- Synchronous
- Asynchronous

Communication Layer

Optional

Select the communication layer from the drop-down list. The list displays the following values:

- Application
- Database

WS Service Name

Alphanumeric; 16 Characters; Optional

Specify WS Service Name.

WS Port

Numeric; 8 Characters; Optional

Specify WS Port.

WS EndPoint URL

Alphanumeric; 35 Characters; Optional

Specify WS EndPoint URL.

WS User

Alphanumeric; 16 Characters; Optional

Specify WS User.

WS Password

Alphanumeric; 16 Characters; Optional

Specify WS Password.

Custom Classname

Alphanumeric; 8 Characters; Optional

Specify Custom Classname.

ATM Server IP

Numeric; 15 Characters; Optional

Specify the ATM server IP address.

ATM Server Port

Numeric; 8 Characters; Optional

Specify ATM Server Port.

MDB QCF

Alphanumeric; 8 Characters; Optional

Specify MDB QCF details.

MDB Out Queue

Alphanumeric; 16 Characters; Optional

Specify MDB out queue details

MDB Response Queue

Alphanumeric; 16 Characters; Optional

Specify MDB response queue details.

Audit Enabled

Alphanumeric; 16 Characters; Optional

Specify audit enabled details.

Source

Alphanumeric; 16 Characters; Optional

Specify source details.

External DataSource

Alphanumeric; 16 Characters; Optional

Specify external data source details.

Symmetric Key

Alphanumeric; 16 Characters; Optional

Specify symmetric key details.

5.14 Upload Source Maintenance

This section contains the following topic:

- [Section 5.14.1, "Invoking Upload Source Maintenance Screen"](#)

5.14.1 Invoking Upload Source Maintenance Screen

Oracle FLEXCUBE Investor Servicing facilitates upload of data from an external source. The details of the source from which data has to be uploaded need to be maintained in Oracle FLEXCUBE Investor Servicing using the 'Upload Source Maintenance' screen.

You can invoke the 'Upload Source Maintenance' screen by typing 'SMDSORCE' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button.

Upload Source Maintenance

Save

Source Code *

Description

Authentication Required

Input by DateTime Mod No Open

Authorized by DateTime Authorized Authorized

Cancel

You can specify the following details.

Source Code

Alphanumeric; 12 Characters; Mandatory

Specify a source code from which data has to be uploaded to Oracle FLEXCUBE Investor Servicing.

Description

Give a small description for the source code specified.

Authentication Required

Check this box to indicate if base data has to be uploaded from Oracle FLEXCUBE Investor Servicing.

5.15 Source Preferences Maintenance

This section contains the following topic:

- [Section 5.15.1, "Invoking Source Preferences Maintenance Screen"](#)

5.15.1 Invoking Source Preferences Maintenance Screen

You can set preferences for upload of data from an external source in the 'Source Preferences Maintenance' screen. You can invoke the 'Source Preferences Maintenance' screen by typing 'SMDUPLDM' in the field at the top right corner of the Application tool bar and clicking the adjoining arrow button.

Function Id Preferences	Input by	DateTime	Mod No	Open
	Authorized by	DateTime		Authorized

The following details are captured here:

Source Code

Alphanumeric; 12 Characters; Mandatory

Select Source Code from the option list. Depending on the source code you select here data is uploaded from that source into Oracle FLEXCUBE IS.

Module Code

You can choose to upload data from a source directly onto a module in Oracle FLEXCUBE IS. Indicate the module into which you would like to upload data from a given source.

Error Handling

On Override

Oracle FLEXCUBE IS generates override messages in case it encounters any discrepancies during data upload. You can choose to do any of the following:

- Ignore – Select this option to ignore such error messages and continue with the upload process

- Put on Hold – Select this option to put the record on hold for user intervention later
- Reject – Select this option to reject the record

On Exception

In case a serious error occurs during data upload, Oracle FLEXCUBE IS generates an error message. You can choose to put the record with the error on hold. In such a case, choose 'Put on Hold' from the list of options available. If you would like to reject the record altogether, choose 'Reject'.

Post Upload

Status


If you would like to automatically authorize the data that is uploaded into Oracle FLEXCUBE choose the 'Authorize' option here.

If you would like the record to be put on hold choose this option in this field.

If you would like the record to be unauthorized, choose the 'Unauthorized' option in this field. The record will not be authorized automatically on upload. You will have to manually authorize the data.

5.15.2 Function ID Preferences Button

Click 'Function ID Preferences' button in 'Source Preferences Maintenance' screen.

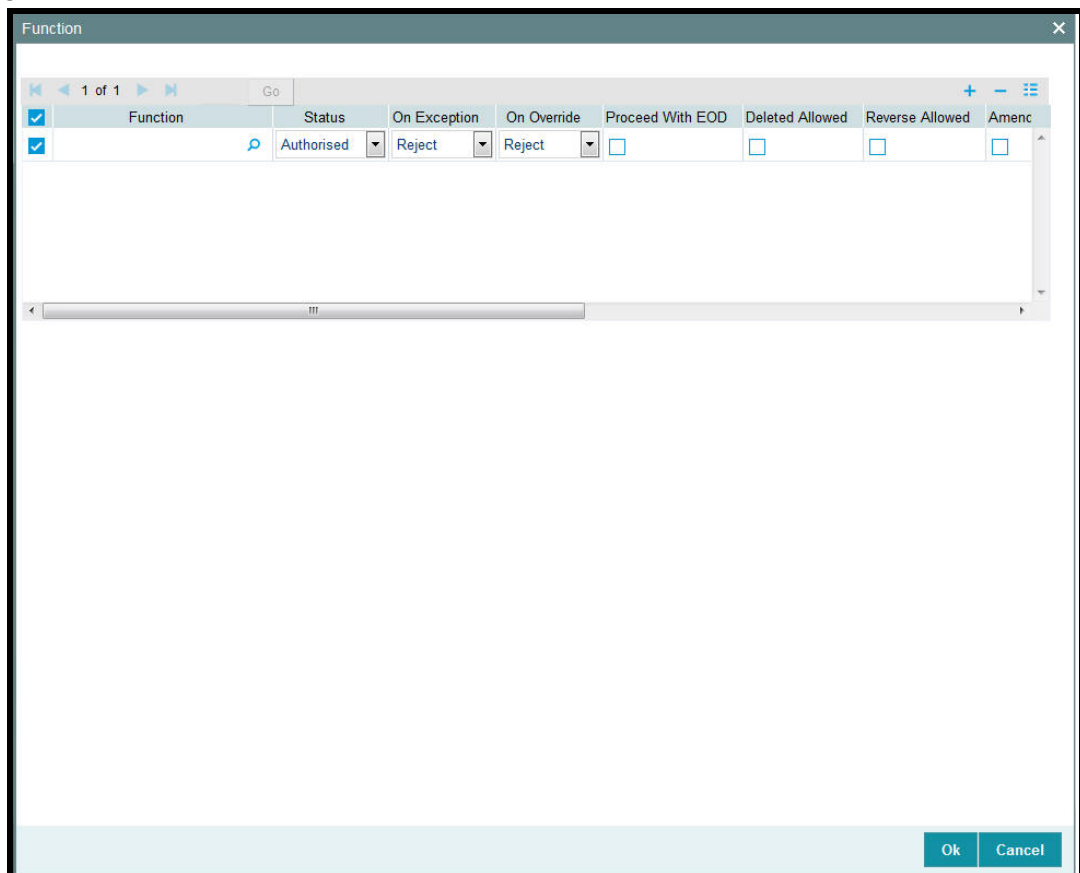

You can specify the following details:

Function

Alphanumeric; Optional

Specify the function ID. Alternatively, you can also select function ID from the option list. The system displays all valid function IDs maintained in the system.

Status

Optional

Select the status from the drop-down list. The list displays the following values:

- Authorised
- Unauthorised

On Exception

Optional

Select the on exception details from the drop-down list. The list displays the following values:

- Reject
- Put on Hold

On Override

Optional

Select the on override details from the drop-down list. The list displays the following values:

- Reject
- Put on Hold

Proceed With EOD

Optional

Check this box to proceed with EOD.

Deleted Allowed

Optional

Check this box if deletion of a record is allowed.

Reverse Allowed

Optional

Check this box if reversal of a record is allowed.

Amend Allowed

Optional

Check this box if amending a record is allowed.

Purge Days

Optional

Check this box if number of days can be purged.

Allow Deferred Processing

Optional

Check this box to allow deferred processing.

Allow EOD With Deferred

Optional

Check this box to allow EOD with deferred record.

5.16 Notification Enroute Maintenance

This section contains the following topics:

- [Section 5.16.1, "Invoking Notification Enroute Maintenance Screen"](#)

5.16.1 Invoking Notification Enroute Maintenance Screen

You can set up notification queue at module level using 'Notification Enroute Maintenance' screen. Notification job will look into the SMS data store for any pending activity and depending upon the module code call will be made to respective LOB to build response xml and place it in the maintained notification queue for that module.

You can invoke 'Notification Enroute Maintenance' screen by typing 'UTDNTFEN' in the field at the top right corner of the Application tool bar and clicking on the adjoining arrow button.

Input by	Authorized by	DateTime	Mod No	Open	Authorized
----------	---------------	----------	--------	------	------------

You can specify the following details:

Module ID

Alphanumeric; 16 Characters; Mandatory

Specify the module ID. Alternatively, you can select module ID from the option list. The list displays all valid module ID maintained in the system.

Description

Display

The system displays the description for the selected module ID.

Notification Code

Alphanumeric; 16 Characters; Mandatory

Specify the notification code. Alternatively, you can select modification code from the option list. The list displays all valid notification code maintained in the system.

Description

Display

The system displays the description for the selected notification code.

Destination Name

Alphanumeric; 16 Characters; Mandatory

Specify the destination name.

6. Tanking of Maintenance Records

The maintenance records that are created or modified in the system can be tanked till they get authorized, so that it is possible to undo the modifications, if needed, before the records are authorized. The maintenance log also will store the changes till they get authorized. The new or the modified records are written to the static tables only after authorization.

This chapter contains the following sections:

- [Section 6.1, "Tanking New and Modified Maintenance Records"](#)

6.1 Tanking New and Modified Maintenance Records

This section contains the following topics:

- [Section 6.1.1, "Enabling Tanking of Maintenance Records"](#)
- [Section 6.1.2, "Tanking New Records"](#)
- [Section 6.1.3, "Tanking Modified Records"](#)
- [Section 6.1.4, "Closing a Record"](#)
- [Section 6.1.5, "Re-opening a Record"](#)
- [Section 6.1.6, "Authorizing a Record"](#)
- [Section 6.1.7, "Deleting a Record "](#)
- [Section 6.1.8, "Viewing Summary of Records"](#)
- [Section 6.1.9, "Modifying Tanking Preferences"](#)

6.1.1 Enabling Tanking of Maintenance Records

You can enable tanking of the creation and modification of maintenance records by selecting the 'Tanking Required' option provided at the function ID level. You need to enable the 'Tanking Required' option in RAD tool as well.

Tanking of records has been enabled only for the following function IDs:

FUNCTION_ID	MAIN_MENU	SUB_MENU_1	DESCRIPTION
UTDGLACM	A/c System GL Setup	Detail	Accounting System GL Setup Detail
UTDATREP	Auth Rep	Detail	Auth Rep Maintenance Detail
UTDASSSD	AutoSwitch SetUp	Detail	AutoSwitch Setup Detail
UTDBRKTY	Broker Type	Detail	Broker Type Detail
UTDCMPMN	Campaign Maintenance	Detail	Campaign Maintenance
UTDCONPF	Country Preference	Detail	Country Preference Maintenance Detail
UTDCURCT	Currency CutOff	Detail	Currency Cutoff Detail
UTDENTCO	Entity Comm.Share	Detail	Entity Commission Sharing Detail

FUNCTION_ID	MAIN_MENU	SUB_MENU_1	DESCRIPTION
UTDBRIDS	Entity IDS	Detail	Income Distribution Setup Detail
UTDVEST	Entity Media Maintenance	Detail	Entity Media Maintenance
UTDFATMT	FATCA	Entity FATCA Classification	Entity FATCA Classification Maintenance Detail
UTDFATDT	FATCA	FATCA Document Maintenance	FATCA Document Maintenance Detail
UTDFAR	FBC Accs Restriction	Detail	FBC Access Restriction Detail
UTDFRQPR	Freq Preference	Detail	Frequency Preferences Detail
UTDFNDAC	Fund Account	Detail	Fund Account Input Detail
UTDFALMT	Fund Agency Limit	Detail	Fund Agency BackDating Limit Setup Detail
UTDFNENT	Fund Entity	Detail	Fund Entity Mapping Detail
UTDFNDFM	Fund Family	Detail	Fund Family Detail
UTDFPHOL	Fund Price Holiday	Detail	Fund Price Holiday Maintenance Detail
UTDFNDRL	Fund Rules	Fund Rules	Fund Rules Detail
UTDFSAMS	Fund Sub Acc Mapping	Detail	Fund Sub Account Mapping Detail
UTDFNSWR	Fund Switch Restrict	Detail	Fund Switch Restrict Detail
UTDFNDUS	Fund User	Fund User	Fund User Restriction
UTDFNDIS	Fund-ISIN Mapping	Detail	Fund-ISIN Mapping Detail
UTDGFPLR	GF Policy Restrict Mapping	Detail	GF Policy Restrict Mapping
UTDGLISD	GL Interface Set-Up	Detail	GL Interface Set-Up Detail
UTDGRPCH	Group Character	Detail	Group Characteristics Detail
UTDHWM	High Water Mark Maintenance	Detail	High Water Mark Maintenance
UTDHOLID	Holiday Maintenance	Detail	Holiday Maintenance Detail

FUNCTION_ID	MAIN_MENU	SUB_MENU_1	DESCRIPTION
UTDKYCMT	KYC Maintenance	Detail	KYC Maintenance Detail
LEDCMSD	LEP Maintenance	Cession	Cession Maintenance Detail
LEDMGMAP	LEP Maintenance	Management Fee	Management Fee Applicability Detail
LEDPROD	LEP Maintenance	Product	Product Maintenance Detail
LEDPRBON	LEP Maintenance	Product Bonus	Product Bonus Maintenance Detail
LEDPRDEN	LEP Maintenance	Product Entity Maintenance	Product Entity Maintenance Detail
LEDPNFM	LEP Maintenance	Product Nature Of Fund Mapping	Product Nature Of Fund Mapping
LEDPRTAX	LEP Maintenance	Product Tax Class Maintenance	Product Tax Class Maintenance Detail
LEDPRSUB	LEP Maintenance	Product Transaction Sub Type Mapping	Product Transaction Sub Type Mapping Detail
LEDPRTYP	LEP Maintenance	Product Type	Product Type Maintenance Detail
LEDPWHTD	LEP Maintenance	Product WHT Setup	Product With-holding Tax Detail
LEDPAALM	LEP Maintenance	Product-Annual Annuity Limit Mapping	Product Annual Annuity Limit Detail
UTDPAYGP	Payment Group Maintenance	Detail	Payment Group Maintenance
UTDRSPM	Plan Maintenance	Detail	Plan Maintenance Detail
SMDPRTMN	Printer maintenance	Detail	Printer maintenance
UTDSWLAG	Pseudo Switch Lag	Detail	Pseudo Switch Lag Maintenance
UTDENTRL	Relationship Maint	Detail	Relationship Maintenance Detail

FUNCTION_ID	MAIN_MENU	SUB_MENU_1	DESCRIPTION
UTDSCDEF	Share Class	Detail	Share Class Definition Detail
UTDSUBFN	Sub Fund Share Class	Detail	Sub Fund Share Class Detail
UTDSWMSG	Swift Message Setup	Detail	Swift Message Setup Maintenance Detail
UTDSWPRV	Switch Privilege	Detail	Switch Privilege Setup Detail
UTDMINHL	UH Category Holding Period	Detail	Fund UH Category Minimum Holding Period Detail
UTDUHIDS	UH IDS Setup	Detail	Income Distribution Setup Detail
UTDUHIOF	UH IRRF Preference	Detail	Unit Holder IRRF Preference Detail
UTDUHLOI	UH LOI	Detail	Unit Holder LOI Setup Detail
UTDUHNPI	UH NPI Preference	Detail	Unit Holder NPI Preference Detail
UTDUHCOE	Unit Holder Currency of Expression	Detail	Unit Holder Currency of Expression
UTDUH	Unitholder	Detail	Unit Holder Maintenance Detail

6.1.2 Tanking New Records

During the creation of a new record, if 'Tanking Required' option is enabled, the system tanks the details of the newly created record till the record gets authorized. Any query on this data retrieves this stored information.

6.1.3 Tanking Modified Records

All modifications to unauthorized records get tanked and the modified data gets written to actual tables only after authorization. In this case, the record remains in 'Authorized' status in the actual table and the unauthorized modifications will be kept pending for un-tanking. The most recent modifications will be shown in both summary and detailed screens with the Authorization status as 'Unauthorized'.

Note

Reject of tanked unitholder modifications are supported for unit holder that are authorized at least once. You can use 'Delete' to remove modifications prior to authorization.

6.1.4 Closing a Record

You can close a record only if it is in 'Authorized' state, without any unauthorized modifications pending for un-tanking. Closure is possible only for records that are in 'Open' status. When you close a record, the system tanks this and the record gets actually closed only after the closure gets authorized.

6.1.5 Re-opening a Record

You can re-open a record only if it has been closed and the closure is authorized. Re-opening of a record gets tanked till it gets authorized and the actual re-opening happens after the authorization.

6.1.6 Authorizing a Record

All unauthorized modifications get displayed when you click 'Authorize' menu option. You can select a modification number and the records get authorized till that modification. These records are un-tanked and their status gets updated as 'Authorized'. You can authorize the modifications partially, if required.

6.1.7 Deleting a Record

All unauthorized records will be available for deletion. You can select a modification number and system deletes all unauthorized modifications from the selected modification number. If the modifications getting deleted are made by a user other than the current user, the system displays an error message.

6.1.8 Viewing Summary of Records

All summary screens display data retrieved from both the summary data source and the table that contains the unauthorized tanked records.

6.1.9 Modifying Tanking Preferences

You can modify the tanking preferences specified for a function Id, if required. This modification is possible only if all records related to that function Id are in 'Authorized' status.

7. Function ID Glossary

I

IFDINPRM5-26

S

SMDAUTAU 3-25, 4-3

SMDCHPWD2-38

SMDCLUSR 2-33, 3-23

SMDHOTKY2-31

SMDMODUL2-43

SMDPARAM2-35

SMDROLD 2-4, 3-5, 3-7

SMDSORCE5-30

SMDUPLDM5-31

SMDUSRDF 2-9, 3-9

SMREVNLO5-24

SMRPEVLG 5-25

SMSCHPWD 2-40

SMSPRTMN 2-45

U

UTDAMDMT 5-20

UTDEXFUN 5-7

UTDEXSYS 5-2

UTDHOTKY 2-31

UTDNTFEN 5-34

UTDRLSMT 2-46

UTSAMDMT 5-21

UTSEXFUN 5-8

UTSEXSYS 5-5

UTSMCS 5-18

UTSMEDIA 5-13