

# **Oracle® AutoVue Web Services**

Developer's Guide

Release 21.0.0

November 2015

Copyright © 1999, 2015 Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation shall be subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License (December 2007). Oracle America, Inc., 500 Oracle Parkway, Redwood City, CA 94065.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

This software or hardware and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

Portions of this software Copyright 1996-2007 Glyph & Cog, LLC.

---

---

# Contents

<b>Preface</b> .....	v
Audience .....	v
Documentation Accessibility .....	v
Related Documents .....	v
Conventions .....	v
<b>1 Introduction</b>	
<b>2 System Requirements and Architecture</b>	
2.1 System Requirements .....	2-1
2.2 Architecture .....	2-1
2.3 How AutoVue Web Services Works .....	2-1
<b>3 Using AutoVue Web Services</b>	
3.1 How to use AutoVue Web Services .....	3-1
3.1.1 Java Client .....	3-1
3.1.1.1 Generating Client Proxy Using WSimport .....	3-1
3.1.1.2 Importing and Using Client Proxy .....	3-2
3.1.2 .NET Client .....	3-2
3.1.2.1 Generating Client Proxy using WSDL .....	3-3
3.1.2.2 Importing and Using Client Proxy in Microsoft Visual Studio 2005 .....	3-3
3.1.2.3 Importing and Using Client Proxy in Microsoft Visual Studio 2008 .....	3-5
3.1.3 HTTPS/SSL .....	3-7
<b>4 AutoVue Web Services and DMS Integration</b>	
4.1 VueLink for Oracle UCM .....	4-2
4.2 VueLink for Documentum .....	4-3
4.3 Third-Party Integration .....	4-3
4.3.1 AutoVue ISDK Integration Example .....	4-3
<b>5 Oracle Web Services Manager</b>	
<b>6 Testing AutoVue Web Services</b>	
6.1 AutoVue Web Services Methods .....	6-2

6.2	AutoVue Web Service API.....	6-6
-----	------------------------------	-----

## **A Appendix A - Sample Client Code in Java**

A.1	Web Services Sample Client Code for Printing .....	A-2
A.1.1	Packet Printing .....	A-3

## **B Feedback**

B.1	General AutoVue Information .....	B-1
B.2	Oracle Customer Support .....	B-1
B.3	My Oracle Support AutoVue Community .....	B-1
B.4	Sales Inquiries.....	B-1

---

---

# Preface

The AutoVue Web Services Developer's Guide describes how to create a Web service client stub for the AutoVue Web Services package, how to use the generated code inside your application, and how to call AutoVue Web Services methods from inside your code.

For the most up-to-date version of this document, go to the AutoVue Documentation Web site on the Oracle Technology Network (OTN) at <http://www.oracle.com/technetwork/documentation/autovue-091442.html>.

## Audience

This document is intended for third-party developers (for example, integrators) who want to implement SOAP-based integration with AutoVue.

## Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

### Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

## Related Documents

For more information, see the following documents in the Oracle AutoVue Web Services documentation set:

- *Installation and Configuration Manual*
- *Deployment Guide*
- *Overview*
- *Release Notes*

## Conventions

The following text conventions are used in this document:

---

<b>Convention</b>	<b>Meaning</b>
<b>boldface</b>	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
monospace	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

---

---

---

# Introduction

---

---

**Note:** It is recommended that you first review the *Oracle AutoVue Web Services Overview* and *Oracle AutoVue Web Services Installation and Configuration Manual*. These manuals are located in the **docs** directory. Additionally, you can access them from the readme file, *readme.html*, located in the root folder where you installed AutoVue Web Services.

---

---

The AutoVue Web Services package provides a standard interface for developers to take advantage of AutoVue functionalities in the environment and programming language of their choice, as long as Simple Object Access Protocol (SOAP) is supported by their platform.

AutoVue Web Services represents many AutoVue functionalities such as print, convert, text extraction, and more in the structure defined by Web Service Definition Language (WSDL). These functionalities are discussed in more detail later in the manual.

This document is intended for systems integrators or developers who want to implement SOAP-based integration with AutoVue. This manual also serves as a good starting point for developers and professional services to become more familiar with the technical details of this package; it shows you how to create a Web service client stub for the AutoVue Web Services package, how to use the generated code inside your application, and how to call AutoVue Web Services methods from inside your code.

The AutoVue Web Services package is designed to work seamlessly with Document Management Systems (DMS) through various DMS integrations. It can also work with local files and Uniform Resource Identifiers (URIs) that are accessible to the host machine.

---

---


**Note:** Not all of AutoVue's functionalities are represented in the AutoVue Web Services package. This is because many of the functionalities require user interaction (for example, online collaboration, digital mockup, and so on) and are not suitable for application-to-application communication; which is the main objective of AutoVue Web Services

---

---

The following diagram displays the communication process for AutoVue Web Services:

**Figure 1-1 Communication Process for AutoVue Web Services**

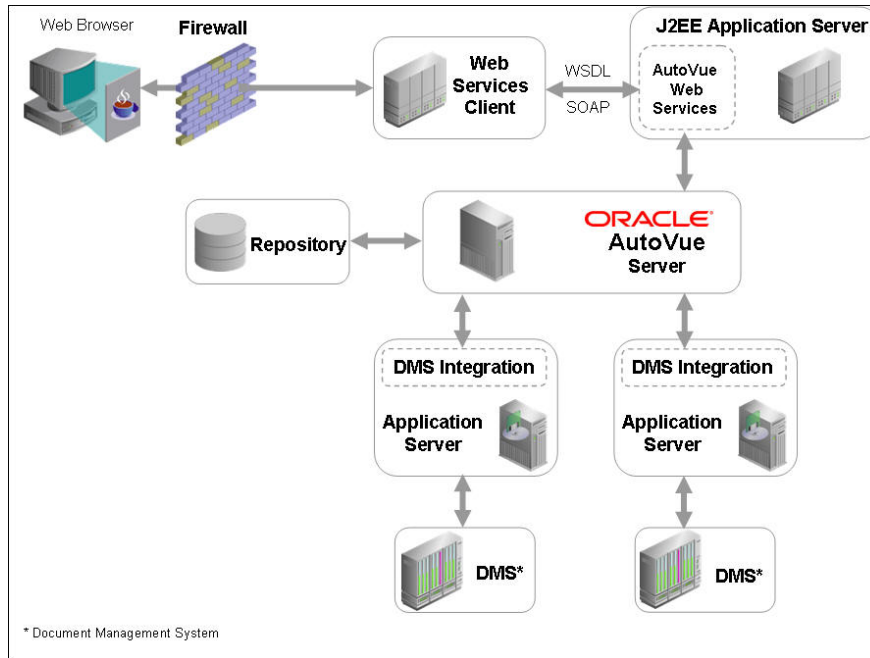

---

# System Requirements and Architecture

This chapter discusses the following:

- Section 2.1, "System Requirements"
- Section 2.2, "Architecture"
- Section 2.3, "How AutoVue Web Services Works"

## 2.1 System Requirements

AutoVue Web Services uses Java annotation and other features introduced in Java EE 5. As a result, it must be deployed on a Java EE 5 (or later) certified application server.

For a complete list of system requirements specific to your platform, refer to the *Oracle AutoVue Web Services Installation and Configuration Manual*.

## 2.2 Architecture

The AutoVue Web Services package acts as a layer around Oracle AutoVue. It exposes certain AutoVue functionalities as Web methods, and translates AutoVue Web Services requests to and from AutoVue (for example, AutoVue messages to AutoVue Web Services responses). Additionally, AutoVue Web Services enables AutoVue to communicate with any third-party application that wants to invoke AutoVue in a Service Oriented Environment (SOE).

## 2.3 How AutoVue Web Services Works

Once the AutoVue Web Services package is deployed, its Web Service Definition Language (WSDL) interface (VueBeanWS?wsdl) provides the gateway to client applications. Client applications can detect available Web methods and their input/output parameters through the WSDL, and generate a proper communication proxy. Since most programming languages have tools to automatically generate Web service client stubs, it does not take much effort to create one for AutoVue Web Services (all AutoVue Web Services methods are defined in a single WSDL).

Once the client stub is created in a specific programming language it can be reused by applications in that language and a few lines of code are needed to call any AutoVue Web Services method through the client proxy.

Several AutoVue Web Services methods accept options (for example, print and convert) as an optional input parameter. The structures of these options are defined in a XML Schema Definition (XSD) that is linked to the WSDL and are generated in the client stub code automatically. The client application instantiates these options and sets their variables to desired values and invoke the AutoVue Web Services method.

After a successful call to an AutoVue Web Services method, it either returns the desired output, or in the event there is an issue with the input parameters, it returns an error message.

---

---

**Note:** The output types of AutoVue Web Services methods vary from one to another. Regardless, all custom output structures are defined in the XSD and are generated automatically once the client stub is generated.

---

---

---

---

## Using AutoVue Web Services

This chapter discusses how to use AutoVue Web Services and the steps to involved to create client proxy.

### 3.1 How to use AutoVue Web Services

The first step in using AutoVue Web Services is to create a client proxy in your desired language. Then, after installation and deployment of AutoVue Web Services, look for the URL that points to the WSDL (for example, `http://host:port/AutoVueWS/VueBeanWS?wsdl`). This URL is needed for any utility that you use to create your client stub.

#### 3.1.1 Java Client

There are two steps in generating a Java client proxy:

1. Section 3.1.1.1, "Generating Client Proxy Using WSimport"
2. Section 3.1.1.2, "Importing and Using Client Proxy"

##### 3.1.1.1 Generating Client Proxy Using WSimport

To generate the Java client proxy, you can simply call *wsimport*, which is bundled with Java Standard Edition 6, from the command line with the *-keep* option and pass the WSDL's URL.

**For example:**

```
wsimport -keep http://host:port/AutVueWS/VueBeanWS?wsdl
```

This will provide the following output:

```
parsing WSDL...
generating code...
compiling code...
```

After returning back to the command line, a new Java package is created in the current location.

The directory structure of the package should be `com\oracle\autovue\services`. All client proxy codes are generated inside this directory.

For detailed information regarding available *wsimport* options refer to the following link:

<http://java.sun.com/javase/6/docs/technotes/tools/share/wsimport.html>

### 3.1.1.2 Importing and Using Client Proxy

The next step is to import and instantiate the generated package inside your client code. The following code demonstrates how to call an AutoVue Web Services method:

```
import com.oracle.autovue.services.*;

public class AutoVueWSClient {

    public static void main(String[] args) throws Exception {

        //create service
        VueBeanWS_Service service = new VueBeanWS_Service();

        //create proxy
        VueBeanWS proxy = service.getVueBeanWSPort();

        //call autovue ping Web method
        System.out.print (proxy.ping("Hello from Java" ) );
    }
}
```

The first line, `import com.oracle.autovue.services.*;` imports the AutoVue client stub package generated by the `wsimport` tool. To call a Web method, you need to first instantiate the `VueBeanWS_Service` object. From this object, instantiate the `VueBeanWS` class which is the proxy for calling all AutoVue Web Services methods.

The simplest AutoVue Web Services method to run--which is also a good method for testing--is the `ping` method. It verifies that AutoVue Web Services is running and responding correctly.

After running the above code, you should receive an output similar to the following:

```
Server Date/Time: //some number showing current time at the server side
Pool, Size: //some number showing the size of the Web service pool
Max waiting time:// some number showing maximum timeout (in seconds) while waiting
to borrow VueBean from VueBean pool
Pool, # of active: //number of active objects in the pool
Pool, # of idle: //number of idle objects in the pool
initialJVueServer: //URL for VueServlet used to connect to JVue server
vuelink Protocol(s): //some vuelink protocols e.g. vuelink1;vuelink2;vuelink3
vuelink PropsDir: //some local path to vuelink properties file
destination DIR: //some local path to output generated files
log4j config file: //some local path to log4j properties file
```

---

---

**Note:** Optionally, you can pass a string value to this method.

---

---

For a detailed description on calling AutoVue Web Services methods, refer to [Chapter 6, "Testing AutoVue Web Services"](#).

## 3.1.2 .NET Client

This section contains the following:

- [Section 3.1.2.1, "Generating Client Proxy using WSDL"](#)
- [Section 3.1.2.2, "Importing and Using Client Proxy in Microsoft Visual Studio 2005"](#)
- [Section 3.1.2.3, "Importing and Using Client Proxy in Microsoft Visual Studio 2008"](#)

### 3.1.2.1 Generating Client Proxy using WSDL

The .NET environment also provides a tool for creating an AutoVue Web Services client proxy, *wSDL.exe*. To generate the AutoVue Web Services client proxy, from the command line, you can simply pass WSDL's URL to *wSDL.exe*.

**For example:**

```
wSDL.exe http://host:port/AutoVueWS/VueBeanWS?wSDL
```

The tool generates a file, *VueBeanWS.cs*, in the same location as *VueBeanWS?wSDL*.

---

**Note:** If you want the information being sent between a client and AutoVue Web Services to be secure, you should enter the HTTPS protocol in the URL instead of HTTP. For more information, refer to [Section 3.1.3, "HTTPS/SSL"](#).

---

Since Microsoft Visual Studio is the primary IDE for .NET development, you can also use it to create and use the AutoVue Web Services client proxy. For more information on using Microsoft Visual Studio for generating a client proxy, depending on your environment, refer to [Section 3.1.2.2, "Importing and Using Client Proxy in Microsoft Visual Studio 2005"](#) or [Section 3.1.2.3, "Importing and Using Client Proxy in Microsoft Visual Studio 2008"](#).

### 3.1.2.2 Importing and Using Client Proxy in Microsoft Visual Studio 2005

By using Microsoft Visual Studio 2005, you can generate the AutoVue Web Services client proxy without using the command line.


---

**Note:** Make sure you install Microsoft Web Service Extension (WSE 3.0) before proceeding with the client proxy generation.

---


1. After starting Visual Studio, create a new console application in a C# project (as shown in the [Figure 3-1](#)).

**Figure 3-1** New Project

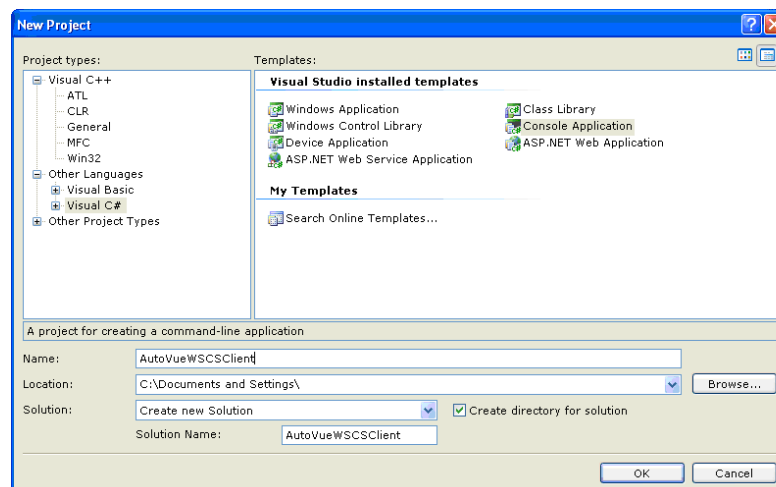

2. In the newly created project, from the **Solutions Explorer** tree, right-click **References**, and then select **Add References**.  
The Add Reference window appears.
3. Click the **Browse** tab and navigate to the WSE 3.0 installation directory. Select the **Microsoft.Web.Services3.dll** file and then click **OK**.
4. From the **Solutions Explorer** tree, right-click **References**, and then select **Add Web References**. The Add Web Reference window appears.
5. Enter the AutoVue WSDL's URL in the **URL** field, and then click **Go**.  
The VueBeanWS Web service, along with all of its Web methods, are displayed in the Add Web Reference window.

**Figure 3–2 Add Web Reference**

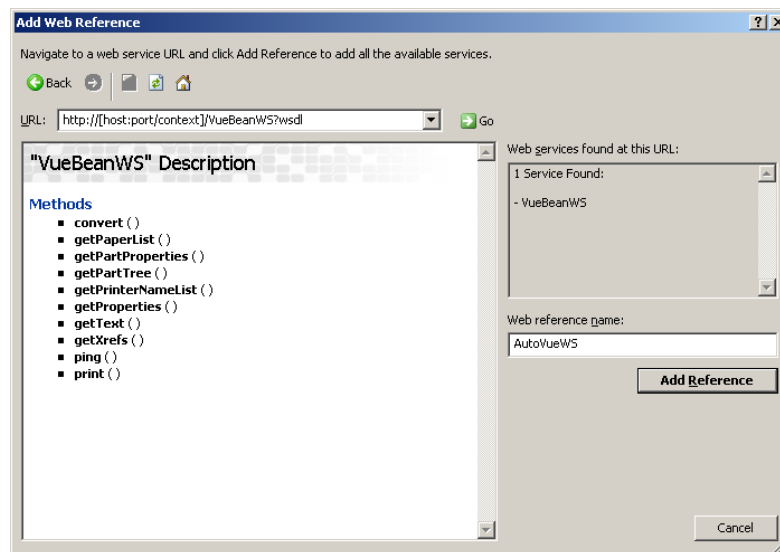

6. Configure the project configuration file with the WSE 3.0 configuration tool:
  - a. From the **Start** menu, select **Program Files, Microsoft WSE 3.0**, and then select **Configuration Tool**. The WSE 3.0 configuration tool starts.
  - b. From the **File** menu, select **Open**, and then select the project configuration file.
  - c. From the **General** tab, select the **Enable this project for Web Services Enhancements** check box.
  - d. From the **Messaging** tab, select **On** for the **Client Mode** option.
7. Optionally, provide a name for the Web Reference (for example, AutoVueWS), and then click **Add Reference**. The proxy code is generated and added to your project.

At this point, you can import the proxy to your application (for example, Program.cs) and call the AutoVue Web Services methods.

The following code demonstrates a sample C# code that calls the Ping Web method:

```
using System;
using AutoVueWSCSClient.AutoVueWS;

namespace AutoVueWSCSClient
{
    class Program
```

```

{
    static void Main(string[] args) {

        try {
            VueBeanWSWse vuebean = new VueBeanWSWse();
            Console.WriteLine(vuebean.ping("Hello from C#"));
        } catch (Exception e){
            Console.WriteLine(e);
        }
    }
}
}

```

As with the ping Web method, you can call all other VueBeanWS Web methods by passing them input parameters. For more information on input/output parameter, refer to the AutoVue Web Services methods descriptions in [Chapter 6, "Testing AutoVue Web Services"](#).

### 3.1.2.3 Importing and Using Client Proxy in Microsoft Visual Studio 2008

As with Microsoft Visual Studio 2005, you can generate the AutoVue Web Services client proxy without using the command line in Visual Studio 2008.


---

**Note:** There is no need for WSE as was required in VS 2005.

---

1. After starting Visual Studio, create a new console application (optionally choose the name AutoVueWSClient). As shown in the following figure, C# is the preferred coding language.


**Figure 3–3** AutoVueWSClient

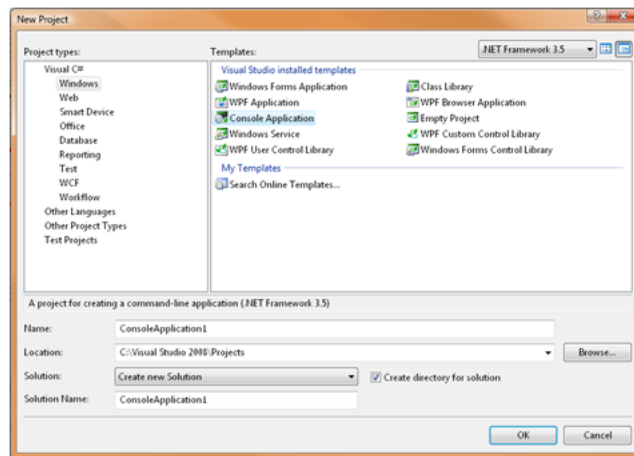

2. In the newly created project, from the Solutions Explorer window, right-click on **References**, and then select **Add Service References**.

The Add Service Reference window appears.

3. Enter the AutoVue WSDL's URL in the URL field, then click **Go**. The VueBeanWS Web service and its Web methods are displayed in the Add Service Reference window.

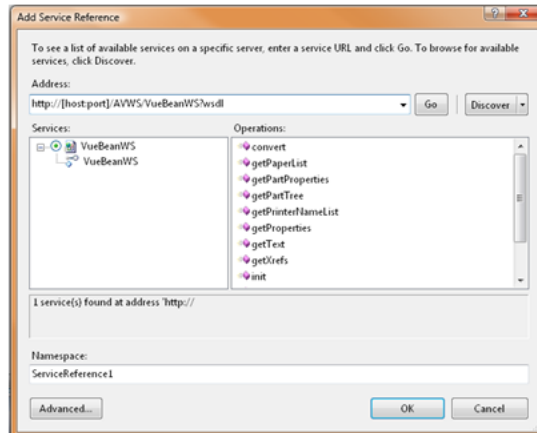**Figure 3–4 Add Service Reference**

4. Optionally, provide a new Namespace (for example, AutoVueWS), and then click **OK**. The proxy code is generated and added to your project.
5. On the Solution Explorer window double-click on the **app.config** file to be opened for editing.
6. Inside the file, locate `messageEncoding="Text"` which is part of the attributes for this binding: `<binding name="VueBeanWSPortBinding" under the <basicHttpBinding>` .
7. Change the value of the attribute to `Mtom`. That is, `messageEncoding="Mtom"`
8. Optionally, increase the values of the `maxBufferSize` and the `maxReceivedMessageSize`. This is useful when using the `convert()` method for converting large files, because the conversion result is returned in binary format attached to the response. At this point, you can import the proxy to your application (for example, Program.cs) and call the AutoVue Web Services methods. The following code demonstrates a sample C# code that calls the ping Web method:

```
using System;
using AutoVueWSCSClient.AutoVueWS;
namespace AutoVueWSCSClient
{
    class Program
    {
        static void Main(string[] args)
        {
            try
            {
                VueBeanWSClient vuebean = new VueBeanWSClient();
                Console.WriteLine(vuebean.ping("Hello from C#"));
            }
            catch (Exception e)
            {
                Console.WriteLine(e);
            }
        }
    }
}
```

As with the ping Web method, you can call all other VueBeanWS Web methods by passing them input parameters.

For more information on input/output parameter, refer to the AutoVue Web Services methods descriptions in [Chapter 6, "Testing AutoVue Web Services"](#).

### 3.1.3 HTTPS/SSL

Security plays an important role in communication between applications. When it comes to Web services, this issue is even more critical. As a result, it is highly recommend to only use HTTPS protocols to call AutoVue Web Services.

To run and use AutoVue Web Services over SSL, you must first deploy AutoVue Web Services on a secure server, import the server certificate to your client environment, and then generate and use the client proxy in the same manner as described in [Chapter 3.1.1.2, "Importing and Using Client Proxy"](#). Additionally, for SSL, you must use a secure connection over HTTPS to generate and use the client code (for example, `https://host:port/AutVueWS/VueBeanWS?wsdl`).

If you are using Oracle Weblogic 11g Release 1 to deploy AutoVue Web Services, you can use the self-signed certificate that comes with the application server out of the box:

1. Export the certificate from Oracle Weblogic 11g Release 1 into a file. You can do so through a Web browser.
2. Import the certificate into your client machine.
3. Follow the instructions in [Section 3.1.1.2, "Importing and Using Client Proxy"](#) to generate and use the client proxy.

---

---

**Note:** Make sure you provide the HTTPS address of the WSDL.

---

---



---

---

## AutoVue Web Services and DMS Integration

In addition to standard protocols supported by AutoVue Server (such as `http://` and `ftp://`), and some custom protocols defined by AutoVue Server (for example, `server://`), AutoVue Web Services architecture allows flexible communication with DMS integrations in the same way as passing a URI. As a result, the client can send information about a document that is inside a DMS repository to AutoVue Web Services. Additionally, if an existing DMS integration is already set up, AutoVue Web Services can communicate with the DMS integration and access the document in order to process the client's request.

As with standard protocols such as `http` and `ftp`, the AutoVue Web Services administrator defines a custom protocol for each DMS integration and assigns a properties file on the AutoVue Web Services server that contains connection information for that specific DMS integration.

For example, if a DMS integration protocol is defined with the name `DMS_Integration_1`, then a `DMS_Integration_1.properties` file contains the location information and any other static data that is needed to communicate with an existing DMS instance. Client code can easily call AutoVue Web Services and pass a valid DMS document ID, as well as use the term `DMS_Integration_1` as prefix (for example, `DMS_Integration_1://dID=12345`). Once AutoVue Web Services finds a match between the DMS integration protocol name in the request and a defined custom protocol (in this case, `DMS_Integration_1`), it treats the rest of the string as a document ID and passes it to the DMS instance.

---

---

**Note:** The name of the DMS integration protocol is arbitrary and can be configured in AutoVue Web Services. However, both associated properties files on the server and client code must use the same name.

---

---

One way for the client to find out whether any DMS integration protocols are defined on the server, is to call the `ping` Web method. One of the outputs of the `ping` Web method is `vuelinkProtocol`, and its value is a semi-colon (;) separated list of DMS integration protocols that are defined by the AutoVue Web Services administrator.

Refer to the *Oracle AutoVue Web Services Installation and Configuration Manual* for information on configuring `vuelinkProtocol`.

---



---

**Note:** It is important for the administrator to use meaningful names for DMS Integration protocols to avoid any confusion on the client side. For example, *vueLinkUCM://*, and so on. Additionally, if more than one instance of the same DMS integration is setup with AutoVue Web Services, a numbering scheme is suggested. For example, *vueLinkUCM1://*, *vueLinkUCM2://*, and so on.

---



---

Because each DMS integration and related DMS repository follow different standards of addressing documents, the structure of the document ID varies from one DMS integration to another. It is important to follow the string representation of document IDs that are defined in this section.

The following sections demonstrate string representations of the document ID for these supported DMS integrations (assuming a custom DMS integration protocol is setup and registered with AutoVue Web Services by the server administrator):

- [Section 4.1, "VueLink for Oracle UCM"](#)
- [Section 4.2, "VueLink for Documentum"](#)
- [Section 4.3, "Third-Party Integration"](#)
- [Section 4.3.1, "AutoVue ISDK Integration Example"](#)

## 4.1 VueLink for Oracle UCM

---



---

**Note:** Oracle UCM has been renamed as Oracle WebCenter Content (WCC).

---



---

The string representation of a document ID in VueLink for Oracle WCC is as follows:

```
dID=some_id_number[&Markup_BasedID=some_id_number] [&Format=some_format]
[&Extension=some file ext]
```

Where:

**dID:** The valid document ID of the desired document.

**Markup\_BasedID:** The valid document ID of the base document (only meaningful and needed when the document ID belongs to an AutoVue Markup).

**Format:** The format of the document according to what is defined inside the Oracle WCC (optional, but it is needed when the document ID belongs to an XRef folio).

**Extension:** The filename extension of the document according to what is defined inside the Oracle WCC (optional, but needed when the document ID belongs to an XRef folio and Format is not included).

The following are examples of URI values when invoking AutoVue Web Services for an Oracle WCC document (assuming protocol name is *vueLinkWCC*):

```
vueLinkWCC://dID=227&Markup_BasedID=228
vueLinkWCC://dID=350&Extension=slddrw
vueLinkWCC://dID=270&Format=Application/dwg&Extension=dwg
vueLinkWCC://dID=253&Extension=xcsr
```

## 4.2 VueLink for Documentum

The string representation of a document ID in VueLink for Documentum is as follows:

```
WebTopURL?userName=some_name&docbase=some_docbase_name&sessionId=webtop_session_id&objectid=some_object_id&rendition=some_file_format
```

**WebTopURL:** The URL for webtop.

**userName:** A valid webtop UserName.

**docbase:** A valid docbase name.

**sessionId:** A valid webtop session ID.

**objectid:** A valid ID of an object in the above docbase.

**rendition:** A valid Documentum format.

The following are examples of URI values when invoking AutoVue Web Services for a Documentum document (assuming protocol name is vuelinkDocumentum):

```
vuelinkDocumentum://http://[host:name]/Webtop6?userName=Administrator&docbase=demo&sessionId=s7&objectid=0901869f80002565&rendition=unknown
```

## 4.3 Third-Party Integration

You must construct a document ID for a file stored inside Third\_Party\_Name DMS using the Third\_Party\_Name protocol.

For example: Third\_Party\_Name://Third\_Party\_NameDocID=123&Format=dwg

---



---

### Note:

- The prefix used in your document ID must match your properties filename (in this case, Third\_Party\_Name).
- To properly access files stored inside your Third\_Party\_Name DMS repository, the syntax of your document ID should match one that is understood by your DMS integration servlet.
- Invoke AutoVue Web Services on the document ID.

For example: getXrefs()/getText()

---



---

### 4.3.1 AutoVue ISDK Integration Example

The string representation of document ID in AutoVue ISDK (filesys) is as follows:

```
RootURL/some_repository/some_file_name/some_file_name(some_version)/some_file_name
```

**RootURL:** The value defined for parameter RootURL in web.xml of ISDK (filesys).

**some\_repository:** A valid repository name which the file belongs to.

**some\_file\_name:** A valid file name that exists in the repository.

**some\_version:** A valid version number for the file.

The following are examples of a URI value when invoking AutoVue Web Services for an ISDK document (assuming that the protocol name is vuelinkISDK):

```
vueLinkISDK://http://localhost/filesysRepository/2D/AutoCAD.dwg/AutoCAD.dwg(1)/AutoCAD.dwg
vueLinkISDK://http://localhost/filesysRepository/3D/Hard Drive.CATProduct/Hard Drive.CATProduct(1)/Hard Drive.CATProduct
```

---

---

**Note:**

- It is important that the prefix used in your document ID matches your properties filename (in this case, vueLinkISDK).
  - No authentication is required in order to access files in AutoVue ISDK (filesys).
  - Invoke AutoVue Web Services on the document ID.  
For example: getXrefs()/getText()
- 
-

---

---

## Oracle Web Services Manager

Oracle Web Services Manager (OWSM) is a component of the Oracle SOA suite. It can be used as a proxy for your AutoVue Web Services, and you can assign it different policies and rules to access AutoVue Web Services. Additionally, you can monitor accesses to your AutoVue Web Services and review different statistics and logs that are provided by OWSM.

OWSM can also be used to perform a simple test of AutoVue Web Services. It can generate an input form for any AutoVue Web Services methods and invoke them through a Web browser. AutoVue Web Services can be easily tested using the Oracle Web Service Manager Test tool.

For more information about Oracle Web Service Manager, refer to the following URL:

[http://www.oracle.com/technology/products/webservices\\_manager/index.html](http://www.oracle.com/technology/products/webservices_manager/index.html)




---

## Testing AutoVue Web Services

For this manual, Oracle SOA Suite 10g is used to test AutoVue Web Services.

1. Start Oracle SOA Suite 10g.
2. As shown in the following screen shot, from the Web Service Manager Control page, click **Tools**, and then click **Test Page**.


**Figure 6–1 Oracle Enterprise Manager - Tools**

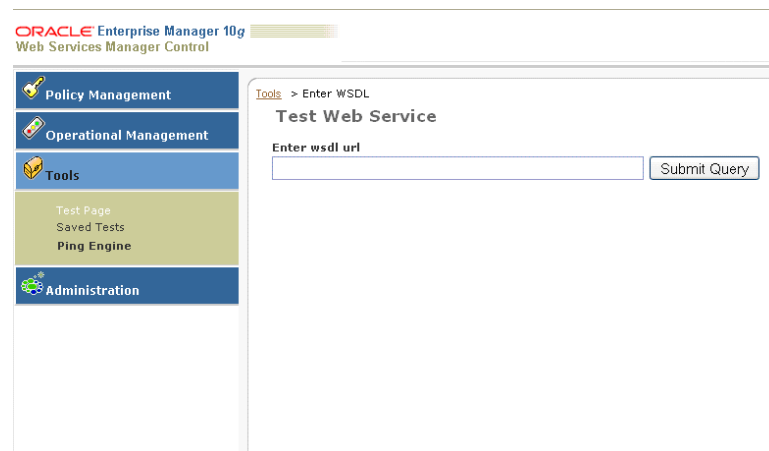

3. Enter the AutoVue Web Services WSDL's URL in the **Enter wsdl url** text box. For example, `http://AVWSHost:7011/AutoVueWS/VueBeanWS?wsdl`
4. Click **Submit Query**.

As shown below, the Test Web Service page reloads with an input form that is ready to invoke one of the AutoVue Web Services methods.

Figure 6–2 Oracle WebServices Manager

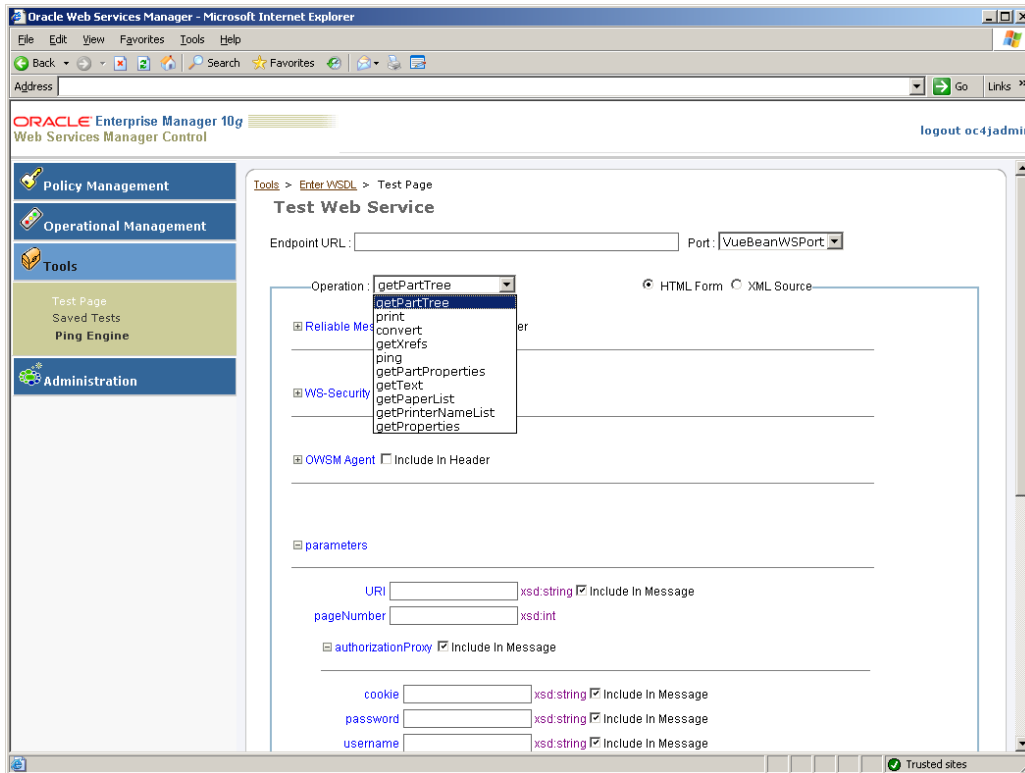

- From the **Operation** list, select a Web method.

For information on the available Web methods, refer to [Section 6.1, "AutoVue Web Services Methods"](#).

## 6.1 AutoVue Web Services Methods

The following table provides a summary of the available AutoVue Web Services methods. After selecting the method and entering the required information, click **Invoke** to send the request to the Web Services provider.

---

**Note:** If the method calls a file from inside the DMS repository that requires authentication, you must provide the required credentials.

---

Web Method	Description
getPartTree	<p>This part tree extraction Web method returns a list of parts contained in a given file.</p> <p>From the Operation list, select <b>getPartTree</b> and wait for the page to refresh.</p> <ol style="list-style-type: none"> <li>1. To invoke this service, enter a valid URI in the <b>URI</b> text box.</li> <li>2. If the URI is a VueLink DocID, or an address that needs authentication, you should also enter the username/password and/or cookie depending on what is required.</li> <li>3. In the <b>pageNumber</b> field, enter a value less or equal to the number returned by <code>getProperties</code>.</li> </ol> <p><b>Note:</b> The <code>dmsArguments</code> section is optional and is only needed if required by a VueLink. To add more DMS arguments, click the plus symbol.</p>
print	<p>This printing Web method sends a given file to a printer for printing. From the Operation list, select <i>print</i> and wait for the page to refresh.</p> <p>The print options for the print Web method are divided into three groups:</p> <p><b>WSPrintOptions</b></p> <p>This option provides the following options:</p> <ul style="list-style-type: none"> <li>■ Specify page range.</li> <li>■ Choose Java Printing. This parameter has to be set to TRUE.</li> <li>■ Choose one of the available paper sizes on the target printer. These values can be retrieved by calling <code>getPaperList</code> and passing the printer name.</li> <li>■ Select <code>printOrientation</code> {ORIENTATION_LANDSCAPE, ORIENTATION_AUTO}</li> <li>■ Select <code>printPageType</code> {PAGES_ALL, PAGES_CURRENT, PAGES_RANGE}</li> <li>■ Specify printer name. The available values can be retrieved by calling <code>getPrinterNameList</code>.</li> <li>■ Flag indicating whether the blank pages should be skipped.</li> <li>■ Flag indicating whether force all colors to black.</li> <li>■ Specify the layers to print for specified pages. Page number, layer id and layer name are mandatory. If no layer information is provided, then the file's default layer settings define which layers to print.</li> </ul> <p><b>WSPrintHeader</b></p> <p>This option allows you to specify the text to be added to the header and footer of the printed page (left, right, and/or center).</p> <p><b>WSPrintWaterMark</b></p> <p>This option provides the following options:</p> <ul style="list-style-type: none"> <li>■ Specify the text to be added as watermark to the printed page.</li> <li>■ Select the orientation of the watermark {DIAGONAL, HORIZONTAL, VERTICAL}</li> </ul>

Web Method	Description
packetPrint	<p data-bbox="602 233 1328 285">Prints a group of documents (known as packets) one at a time, along with the auto-generated cover page and summary page.</p> <p data-bbox="602 296 1312 348">From the Operation list, select <b>packetPrint</b> and wait for the page to refresh.</p> <p data-bbox="602 359 1203 390">The following is the list of packetPrint input parameters:</p> <p data-bbox="602 401 662 432"><b>URIs</b></p> <p data-bbox="602 443 1174 474">A list of URIs that belong to same packet.(mandatory)</p> <p data-bbox="602 485 704 516"><b>PacketID</b></p> <p data-bbox="602 527 1187 558">A string representing the ID of the packet. (mandatory)</p> <p data-bbox="602 569 800 600"><b>PacketIDLocation</b></p> <p data-bbox="602 611 1349 684">One of the six possible locations for packetID to appear on every page. From the printoutLocation enum, it is a combination of (top/bottom) + (left/center/right).</p> <p data-bbox="602 695 1333 747">It is an optional input. The PacketID is printed on the cover page and summary page regardless.</p> <p data-bbox="602 758 769 789"><b>FileIDLocation</b></p> <p data-bbox="602 800 1341 915">One of the six possible locations for File ID (file number in the packet) to appear on every page. From the printoutLocation enum, it is a combination of (top/bottom) + (left/center/right). It is an optional input.</p> <p data-bbox="602 926 857 957"><b>WSPacketPrintOptions</b></p> <p data-bbox="602 968 1308 1020">This option applies to all documents in the packet. It is an optional parameter and provides the following:</p> <ul data-bbox="602 1031 1349 1440" style="list-style-type: none"> <li data-bbox="602 1031 1349 1083">■ Choose Java Printing. If this option is not specified, then it is set to TRUE. Do not set this parameter to FALSE.</li> <li data-bbox="602 1094 1349 1167">■ Choose one of the available paper sizes on the target printer. These values can be retrieved by calling getPaperList and passing the printer name.</li> <li data-bbox="602 1178 1243 1251">■ Select printOrientation {ORIENTATION_LANDSCAPE, ORIENTATION_AUTO}</li> <li data-bbox="602 1262 1349 1335">■ Specify printer name. The available values can be retrieved by calling getPrinterNameList. If this option is not specified, then the default printer is used.</li> <li data-bbox="602 1346 1292 1377">■ Flag indicating whether force all colors to black (grayscale).</li> <li data-bbox="602 1388 1349 1440">■ Specify the layers to print for specified pages. Page number, layer id and layer name are mandatory.</li> </ul> <p data-bbox="602 1451 776 1482"><b>WSPrintHeader</b></p> <p data-bbox="602 1493 1317 1545">This option allows you to specify the text to be added to the header and footer of the printed page (left, right, and/or center).</p> <p data-bbox="602 1556 821 1587"><b>WSPrintWaterMark</b></p> <p data-bbox="602 1598 1065 1629">This option provides the following options:</p> <ul data-bbox="602 1640 1308 1734" style="list-style-type: none"> <li data-bbox="602 1640 1308 1671">■ Specify the text to be added as watermark to the printed page.</li> <li data-bbox="602 1682 1219 1734">■ Select the orientation of the watermark {DIAGONAL, HORIZONTAL, VERTICAL}</li> </ul> <p data-bbox="602 1745 792 1776"><b>openAllMarkups</b></p> <p data-bbox="602 1787 1341 1839">A boolean flag that indicates if the markups of the document must be printed with the document.</p>

Web Method	Description
getXrefs	<p>This External References (XRefs) Web method returns a list of XRefs associated to a given file.</p> <p>From the Operation list, select <b>getXrefs</b> and wait for the page to refresh.</p> <p>This method only requires a valid URI. Authorization is needed only if the URI cannot be accessed without it.</p>
getLayerInfo	<p>This Web service which allows a user to obtain information about layers for every page of a document. It returns a list of pages and a list of layers for each page.</p> <p>From the Operation list, select <b>getLayerInfo</b> and wait for the page to refresh.</p> <p>This method only needs a valid URI. Authorization is needed only if the URI cannot be accessed without it.</p>
getPartProperties	<p>This part level metadata extraction Web method returns a list of all Meta data of a Part inside a given document. This method is only supported for 3D formats.</p> <p>For example, in the case of a 3D assembly, this Web method returns properties of a particular part referenced by the 3D assembly.</p> <ol style="list-style-type: none"> <li>1. From the Operation list, select <b>getPartProperties</b> and wait for the page to refresh.</li> <li>2. This method needs a valid URI and a valid entityID. The valid entityIDs are retrieved by calling the <b>getPartTree</b> method and passing the same URI. Authorization is needed only if the URI cannot be accessed without it.</li> <li>3. In the <b>pageNumber</b> field, enter a value less or equal to the number returned by <b>getProperties</b>.</li> </ol>
getText	<p>This text extraction Web method returns visible text inside a given document. This method is not supported for 3D formats. Meta data is not included by this method (for example, EDA entity information, layer and block names, and so on).</p> <p>From the Operation list, select <b>getText</b> and wait for the page to refresh.</p> <p>This method only needs a valid URI. Authorization is needed only if the URI cannot be accessed without it.</p>
getPaperList	<p>This utility Web method returns the paper sizes for a given printer that are available to AutoVue.</p> <p>From the Operation list, select <b>getPaperList</b> and wait for the page to refresh.</p> <p>This method only needs a valid printer name. Valid printer names can be retrieved by calling <b>getPrinterNameList</b>.</p>
getPrinterNameList	<p>This utility Web method returns a list of available printers.</p> <p>From the Operation list, select <b>getPrinterNameList</b> and wait for the page to refresh.</p> <p>This method does not need an input parameter.</p>

Web Method	Description
convert	<p>This conversion Web method converts a given file into another format such as JPEG, PNG, PDF, or TIFF. It only supports one page at a time.</p> <p>From the Operation list, select <b>convert</b> and wait for the page to refresh.</p> <p>This method can be called without including the option section. In this case, the default options use the bitmap version of the document in its original size.</p> <p>If you set <i>openAllMarkups</i> to TRUE, Web Services retrieves all markups and includes them in the converted output. In a non-integrated these markups are retrieved from the Markups folder of the AutoVue server. When integrated with a DMS, all markups returned by the DMS are included in the converted output.</p> <p>If you include <b>convertOption</b>, you can:</p> <ul style="list-style-type: none"> <li>■ Specify the color depth value.</li> <li>■ Select the output format {BMP, TIF, PDF, JPG, PNG}</li> <li>■ Specify the page (only one page at a time is supported). Note that with PDF format, regardless of the page setting, all pages are converted together.</li> <li>■ Select the <i>convert</i> scale {TYPE_SIZE, TYPE_SCALE}</li> <li>■ Specify the <i>height</i> and <i>width</i> in pixels (if TYPE_SIZE Scale is selected).</li> <li>■ Specify the <i>scaleFactor</i> and <i>stepsPerInch</i> (if TYPE_SCALE is selected).</li> <li>■ Specify if it is a rendition to be saved back to the repository. If set to TRUE, then no convert data is returned to the caller and it is sent to the repository.</li> <li>■ Select the <i>cameraView</i> {NONE, ISOMETRIC, TOP, BOTTOM, FRONT, BACK, LEFT, RIGHT}.</li> </ul> <p>A few notes to consider when using any <b>cameraView</b> other than NONE:</p> <ul style="list-style-type: none"> <li>■ It only applies to 3D documents.</li> <li>■ An illegal argument is thrown if: <ul style="list-style-type: none"> <li>■ An output format other than PNG is selected.</li> <li>■ <i>openAllMarkups</i> is set to TRUE.</li> <li>■ TYPE_SCALE is selected.</li> </ul> </li> </ul>
getProperties	<p>This file level metadata extraction Web method returns metadata and properties for a given file.</p> <p>From the Operation list, select <b>getProperties</b> and wait for the page to refresh.</p> <p>This method only needs a valid URI. Authorization is needed only if the URI cannot be accessed without it.</p>

## 6.2 AutoVue Web Service API

The **JavaDoc** index provides a complete reference to all classes and APIs inside the AutoVue Web Service package. The **com.oracle.autovue.services** package contains all classes and sub-packages of AutoVue Web Services. All the AutoVue Web methods are defined inside the **VueBeanWS** class of this package.

The sub-package **com.oracle.autovue.services.options** includes all classes that represent custom input options for different AutoVue Web methods such as `convert` and `print`.

The sub-package **com.oracle.autovue.services.types** includes all classes that represent custom outputs for different AutoVue Web methods such as `getText`, `getXrefs`, and so on.

The sub-package **com.oracle.autovue.services.pool** includes pooling mechanisms used inside the AutoVue Web Services package.



---

## Appendix A - Sample Client Code in Java

The following sample client code in Java calls all of the AutoVue Web methods with a predefined URL.

```
import java.io.FileOutputStream;
import java.util.List;
import com.oracle.autovue.services.*;

public class AutoVueWSClient
{
    public static void main(String[] args) throws Exception{
        //Create Service
        VueBeanWS_Service service = new VueBeanWS_Service();

        //Create proxy
        VueBeanWS proxy = service.getVueBeanWSport();

        //Call AutoVue ping Web method.
        System.out.print (proxy.ping("hello") );

        String URI =
"http://www.oracle.com/us/products/applications/autoVue/057065.pdf";
        //Call the convert Web method.
        try{
            VueBeanWS_Service service = new VueBeanWS_Service();
            VueBeanWS proxy = service.getVueBeanWSport();
            ConvertOption option = new ConvertOption();
            option.setFormat(Format.BMP);
            option.setPage(1);
            option.setScaleType(ScaleType.TYPE_SIZE);
            option.setHeight(600);
            option.setWidth(800);
            String URI = "server://@1/2d/AutoCAD/.....";
            byte[] file = proxy.convert(URI, option, null, false);
            FileOutputStream fos = new FileOutputStream("c:/temp/output1.bmp");
            fos.write(file);
            fos.close();
        }
        catch(Exception e){
            e.printStackTrace();
        }
        //Call the getPrinterNameList Web method.
        List<String> printers = proxy.getPrinterNameList();
        for (String printer : printers) {
            System.out.println("Printer Name: "+printer);
            System.out.println("Available Papers on this Printer");
        }
    }
}
```

```

//Call the getPaperList Web method
List<String> papers = proxy.getPaperList(printer);
for (String paper : papers) {
    System.out.println("Paper Name: "+paper);
}
//Call the getProperties Web method.
List<MetaProperty> properties = proxy.getProperties(URI, null);
for (MetaProperty prop : properties) {
    System.out.println( prop.getName() + "=" +prop.getValue());
}
//Call the getText Web method.
List<SearchText> texts = proxy.getText(URI, null);
for (SearchText text : texts ) {
    System.out.println("\nPage Number:"+ text.getPageNumber());
    List<String> txts = text.getTexts();
    for (String txt : txts) {
        System.out.print(txt);
    }
}
//Call the getXrefs Web method
List<XrefsInfo> xrefs = proxy.getXrefs(URI, null);
for (XrefsInfo xref : xrefs ) {
    System.out.println("Name:"+xref.getDocName() + " " + "docID:" + xref.ge
DocID());
}
//Assuming URI is a 3D document. Call the getPartTree Web method.
int pageNum = 4;
PartTreeResult parts = proxy.getPartTree(URI,pageNum,null);
//Call getParts Web method.
List<PartInfo> info = parts.getParts();
for (PartInfo part : info) {
    System.out.println("Part Name :"+part.getName() + " - Part ID:" +
part.getID()+" - Part Type:" + part.getType());
    List<PartMetaProperty> metaProps = proxy.getPartProperties(URI, pageNum,
part.getID(), null);
    for (PartMetaProperty meta : metaProps) {
        System.out.println( meta.getName() + "=" meta.getValue());
    }
}
}
}

```

## A.1 Web Services Sample Client Code for Printing

AutoVue Web Services provides a sample Web Services client code, `SampleClient.java`, which demonstrates how to call Web Services' `print()` method. It is located under the `<AutoVue Web Services Installation Directory>\autovue_webservices` directory. You can make the following modification according to your needs:

- Specify the username and password if the file has restricted access. For example, this is needed when storing a file in DMS.
- Specify more print options, watermark options, and header/footer options.
- If an error message containing the string `ERROR_00` appears when the client calls the Web Services `print()` method, then the Web Services cannot process the request due to following reasons:
  - Server is too busy. No `VueBean` is available to process the request.
  - Not enough memory is available for a `VueBean` to open a file.

To resolve this issue, the client must call the *print()* method later. In the `SampleClient.java` file, the client waits for one minute (60000 milliseconds) to call again.

- The following error messages appear when layer information is invalid:
  - ERROR\_005: The page specified in LayersInfo object does not have layer.
  - ERROR\_006: The layer information specified in LayersInfo object is not correct.
  - ERROR\_007: There is no layer information in LayersInfo object for the specified page number.

### A.1.1 Packet Printing

AutoVue Web Services provides a sample Web Services client code, `SamplePacketPrintClient.java`, which demonstrates how to call Web Services' `packetPrint()` method. The sample client code is located under `<AutoVue Web Services Installation Directory>\autovue_webservices` directory.

---

---

**Note:** In the `packetPrint()` method only the list of the documents and the packet ID are mandatory. Other parameters are optional. If you want the packetID to be printed on every page of all documents, then you must specify a print out location. Same is true for file counter (the file ID of each document in the packet is printed if a location is specified).

---

---

If no packet print option is defined or if no printer is set in that object, then the default printer on the AutoVue Web Services machine is used automatically.

The output of the `packetPrint()` method includes an auto-generated cover page at the beginning of the packet print out and a summary page at the end. The summary page includes the success/fail status of each document in the packet. For this reason, the `packetPrint()` method does not return until the last document in the packet is processed.



If you have any questions or require support for AutoVue please contact your system administrator.

If at any time you have questions or concerns regarding AutoVue, please contact us.

### B.1 General AutoVue Information

---

**Web Site** <http://www.oracle.com/us/products/applications/autovue/index.html>

**Blog** <http://blogs.oracle.com/enterprisevisualization/>

---

### B.2 Oracle Customer Support

---

**Web Site** <http://www.oracle.com/support/index.html>

---

### B.3 My Oracle Support AutoVue Community

---

**Web Site** <https://communities.oracle.com/portal/server.pt>

---

### B.4 Sales Inquiries

---

**E-mail** [autovuesales\\_ww@oracle.com](mailto:autovuesales_ww@oracle.com)

---

