# Oracle® Agile Product Lifecycle Management for Process

Reporting User Guide

Release 6.2.1

**E66788-01**

April 2016

ORACLE

Oracle Agile Product Lifecycle Management for Process Reporting User Guide, Release 6.2.1

E66788-01

Copyright © 2016, Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

# Contents

**Preface** ..... ix

Audience ..... ix
Variability of Installations ..... ix
Documentation Accessibility ..... x
Related Documents ..... x
Conventions ..... xi

## 1 Introducing Reporting

**Reporting Options** ..... 1-1

## 2 Using Queued Search Reporting

**Getting Started with Queued Search Reporting** ..... 2-1
Accessing Reporting ..... 2-1
Using the Reporting Page ..... 2-1
Search Field Definitions ..... 2-1
Saving Search Criteria ..... 2-2
Running a Report ..... 2-4
Generating a Report ..... 2-5
Viewing Queued Reports ..... 2-6
Report Status ..... 2-6
**Custom Layouts** ..... 2-7
Defining a Custom Layout ..... 2-7
Creating a New Layout ..... 2-10
Marking a Layout as Default ..... 2-11
Modifying a Layout ..... 2-12
Using the Aggregated Feature ..... 2-13
Deleting a Layout ..... 2-13

## 3 Using Ready Reports

**Overview** ..... 3-1
Usage Examples ..... 3-1
Business Objects ..... 3-2
ADMN ..... 3-2
Component Catalog ..... 3-2
DRL ..... 3-2

eQ ... 3-2
GSM ... 3-2
NPD ... 3-3
NSM ... 3-3
PQM ... 3-3
PQS ... 3-3
SCRM ... 3-3
UGM ... 3-3
WFA ... 3-3
**Assigning Roles** ... 3-4
**Accessing Ready Reports** ... 3-4
Ready Reports Listing Page ... 3-5
Ready Report Details Page ... 3-5
Ready Report Creator Page ... 3-6
Summary Information Section ... 3-7
Search Information Section ... 3-8
Search Criteria Section ... 3-8
Additional Notes about Search Criteria ... 3-8
Search Results ... 3-9
**Using Contextual Variables** ... 3-9
**Using Ready Reports in Agile PLM for Process Applications** ... 3-11
Local Browser Bookmarks ... 3-11
Sharing with the Entire User Base ... 3-12
**Security and Access** ... 3-13
Security ... 3-13
Visibility ... 3-14
Site Access ... 3-14
Ready Report Veto Plugin ... 3-14
Specification Veto Plugin ... 3-14
Technical Documentation ... 3-14
Available Reference Implementations ... 3-14
**Adjusting Report Views** ... 3-14
Terminology ... 3-15
Configuration Files ... 3-15
Report Views Structure ... 3-15
Model ... 3-15
MandatoryProperty ... 3-15
SearchableProperties ... 3-16
DisplayColumns ... 3-16
ColumnInfo ... 3-16
Example: Adding Business Unit to Packaging Search Results ... 3-17
Adding New Report Views ... 3-18

## A Ready Reports Contextual Variables

**Contextual Variables** ... A-1
DRL ... A-1
EQ ... A-1

GSM ..... A-2
NPD ..... A-6
NSM ..... A-7
PQM ..... A-8
PQS ..... A-10
SCRM ..... A-11
UGM ..... A-13

## B Ready Reports Models

ADMN ..... B-1
Custom Section ..... B-1
View: ExtendedSectionAttributeTemplateView ..... B-1
Model: Custom Sections ..... B-1
Extended Attribute ..... B-2
View: ExtendedAttributeView ..... B-2
Model: Extended Attributes ..... B-2
**Component Catalog** ..... B-2
Component Catalog Term ..... B-2
View: FICTermView ..... B-2
Model: Component Catalog Items ..... B-2
**DRL** ..... B-3
DRL Document ..... B-3
View: DocumentSearchView ..... B-3
Model: DRL Documents ..... B-3
**EQ** ..... B-4
Material EQ Request ..... B-4
View: EQMaterialRequestView ..... B-4
Model: Material eQuestionnaires ..... B-4
Packaging EQ Request ..... B-5
View: EQPackagingRequestView ..... B-5
Model: Packaging eQuestionnaires ..... B-5
Printed Packaging EQ Request ..... B-6
View: EQPrintedPackagingRequestView ..... B-6
Model: Printed Packaging eQuestionnaires ..... B-6
Product EQ Request ..... B-7
View: EQProductRequestView ..... B-7
Model: Product eQuestionnaires ..... B-7
Trade EQ Request ..... B-8
View: EQTradeRequestView ..... B-8
Model: Trade eQuestionnaires ..... B-8
**GSM** ..... B-9
Delivered Material Packing Specification ..... B-9
View: SpecSummaryView ..... B-9
Model: Delivered Material Packing Specifications ..... B-9
Equipment Specification ..... B-11
View: SpecSummaryView ..... B-11
Model: Equipment Specifications ..... B-11

Formulation Specification ..... B-13
View: SpecSummaryView ..... B-13
Model: Formulation Specifications ..... B-13
Global Succession Request ..... B-16
View: SuccessionRequestView ..... B-16
Model: Global Succession Requests ..... B-16
GSM Activity ..... B-16
View: SpecSummaryView ..... B-16
Model: GSM Activities ..... B-16
Labeling Specification ..... B-18
View: SpecSummaryView ..... B-18
Model: Labeling Specifications ..... B-18
LIO Profile ..... B-20
View: SpecSummaryView ..... B-20
Model: LIO Profiles ..... B-20
Master Specification ..... B-21
View: SpecSummaryView ..... B-21
Model: Master Specifications ..... B-21
Material Specification ..... B-23
View: SpecSummaryView ..... B-23
Model: Material Specifications ..... B-23
Menu Item Specification ..... B-27
View: SpecSummaryView ..... B-27
Model: Menu Item Specifications ..... B-27
Nutrient Profile ..... B-30
View: SpecSummaryView ..... B-30
Model: Nutrient Profiles ..... B-30
Packaging Specification ..... B-33
View: SpecSummaryView ..... B-33
Model: Packaging Specifications ..... B-33
Packing Config Specification ..... B-35
View: SpecSummaryView ..... B-35
Model: Packing Configuration Specifications ..... B-35
Printed Packaging Specification ..... B-38
View: SpecSummaryView ..... B-38
Model: Printed Packaging Specifications ..... B-38
Product Specification ..... B-40
View: SpecSummaryView ..... B-40
Model: Product Specifications ..... B-40
Testing Protocol ..... B-44
View: SpecSummaryView ..... B-44
Model: Testing Protocols ..... B-44
Trade Specification ..... B-45
View: SpecSummaryView ..... B-45
Model: Trade Specifications ..... B-45
**NPD** ..... B-48
Innovations/Sales Pipeline ..... B-48

View: NPDIdeaView ..... B-48
Model: Ideas ..... B-48
Project ..... B-48
View: ProjectView ..... B-48
Model: Projects ..... B-48
Strategic Brief ..... B-49
View: StrategicBriefView ..... B-49
Model: Strategic Briefs ..... B-49
**NSM** ..... B-50
Nutrient Analysis ..... B-50
View: NutrientAnalysisMainView ..... B-50
Model: Nutrient Analysis ..... B-50
Nutrient Composite ..... B-51
View: NutrientCompositeView ..... B-51
Model: Nutrient Composites ..... B-51
**PQM** ..... B-52
Action ..... B-52
View: PQMActionView ..... B-52
Model: PQM Actions ..... B-52
Audit ..... B-53
View: PQMAuditView ..... B-53
Model: PQM Audits ..... B-53
Issue ..... B-55
View: PQMIssueView ..... B-55
Model: PQM Issues ..... B-55
**PQS** ..... B-57
Lot Sample ..... B-57
View: LotSampleView ..... B-57
Model: Samples ..... B-57
Session ..... B-58
View: SessionView ..... B-58
Model: Sessions ..... B-58
Scorecard ..... B-59
View: ScorecardView ..... B-59
Model: Scorecards ..... B-59
**SCRM** ..... B-59
Company ..... B-59
View: CompanyMainSearchViewSingleSelectAlias ..... B-59
Model: Companies ..... B-59
Company/Facility SDM ..... B-60
View: ManagedDocumentMultiSelect ..... B-60
Model: Supporting Docs - Company/Facility ..... B-60
Facility ..... B-62
View: FacilityMainSearchViewSingleSelect ..... B-62
Model: Facilities ..... B-62
Contact ..... B-63
View: ContactProfileView ..... B-63

Model: Contact Profiles ..... B-63
Non-Spec Sourcing Approval ..... B-64
View: SourcingApprovalNonSpecView ..... B-64
Model: Non-Spec Sourcing Approvals ..... B-64
Spec Related Sourcing Approval ..... B-65
View: SourcingApprovalView ..... B-65
Model: Spec-Related Sourcing Approvals ..... B-65
Non-Spec Sourcing Approval SDM ..... B-66
View: ManagedDocumentMultiSelect ..... B-66
Model: Supporting Docs - Non-Spec SAC ..... B-66
Spec Sourcing Approval SDM ..... B-68
View: ManagedDocumentMultiSelect ..... B-68
Model: Supporting Docs - Spec-Related SAC ..... B-68
**UGM** ..... B-69
Group ..... B-69
View: GroupView ..... B-69
Model: Group Profiles ..... B-69
User ..... B-70
View: UserView ..... B-70
Model: User Profiles ..... B-70
**WFA** ..... B-71
GSM Workflow Process Template ..... B-71
View: WorkflowProcessTemplateView ..... B-71
Model: GSM Workflows ..... B-71
PQM Workflow Process Template ..... B-71
View: WorkflowProcessTemplateView ..... B-71
Model: PQM Workflows ..... B-71
SCRM Workflow Process Template ..... B-71
View: WorkflowProcessTemplateView ..... B-71
Model: SCRM Workflows ..... B-71

## C Best Practices

**When to use Searching, Reporting, or Printing** ..... C-1
**Searching vs Reporting vs Printing Scenarios** ..... C-1
**Reporting Tools Details** ..... C-2
Notes ..... C-2

# Preface

The *Agile Product Lifecycle Management for Process Reporting User Guide* explains how to use the Reporting (RPT) application, in conjunction with Ready Reports, Printing and Custom Reports, to provide reporting capability for data in the Global Specification Management (GSM), eQuestionnaire (eQ), Product Quality Management (PQM), User Group Management (UGM), New Product Development (NPD), and Supply Chain Relationship Management (SCRM) applications, as well as custom data.

This Preface contains these topics:


- Audience
- Variability of Installations
- Documentation Accessibility
- Related Documents
- Conventions


## Audience

This guide is intended for end users who are responsible for creating and managing information in and/or reporting on information in Agile Product Lifecycle Management (PLM) for Process. Information about administering the system resides in the *Agile Product Lifecycle Management for Process Administrator User Guide*.

## Variability of Installations

Descriptions and illustrations of the Agile PLM for Process user interface included in this manual may not match your installation. The user interface of Agile PLM for Process applications and the features included can vary greatly depending on such variables as:

- Which applications your organization has purchased and installed
- Configuration settings that may turn features off or on
- Customization specific to your organization
- Security settings as they apply to the system and your user account

## Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc.

### Access to Oracle Support

Oracle customers have access to electronic support through My Oracle Support. For information, visit http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info or visit http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs if you are hearing impaired.

## Related Documents

For more information, see the following documents in the Oracle Agile PLM for Process documentation set:

- *Agile Product Lifecycle Management for Process Getting Started Guide*
- *Agile Product Lifecycle Management for Process Global Specification Management User Guide*
- *Agile Product Lifecycle Management for Process Supply Chain Relationship Management User Guide*
- *Agile Product Lifecycle Management for Process eQuestionnaire User Guide*
- *Agile Product Lifecycle Management for Process Product Quality Management User Guide*
- *Agile Product Lifecycle Management for Process User Group Management User Guide*
- *Agile Product Lifecycle Management for Process New Product Development User Guide*
- *Agile Product Lifecycle Management for Process Security Configuration Guide*
- *Agile Product Lifecycle Management for Process Configuration Guide*
- *Agile Product Lifecycle Management for Process Release Notes*.
- *Agile Product Lifecycle Management for Process Reporting Guide* (Feature Pack library) for custom report configuration
- *Agile Product Lifecycle Management for Process Navigation Configuration Guide* (Feature Pack library)

These and other documentation are posted on Oracle Technology Network (OTN) at this location:

http://www.oracle.com/technetwork/documentation/agile-085940.html

# Conventions

The following text conventions are used in this document:

| Convention | Meaning |
|---|---|
| **boldface** | Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary. |
| *italic* | Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values. |
| `monospace` | Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter. |

# 1

# Introducing Reporting

This chapter provides an overview of Oracle Agile Product Lifecycle Management (PLM) for Process Reporting and includes the following topic:

- Reporting Options

## Reporting Options

Oracle Agile Product Lifecycle Management for Process offers several ways to access and report on data.

- **Queued Reporting**—Queued Reporting is a method of accessing data through an object model-based queued searches tool that allows users to define their own search criteria and result definitions. This allows for queued searches reporting against much of the data in Global Specification Management (GSM), Product Quality Management (PQM), and Supply Chain Relationship Management (SCRM). One of the main use cases for queued searches is to overcome the 500 search result limit of EQT searches. See Chapter 2, "Using Queued Search Reporting" for more information on this option.
- **Ready Reports**—Ready Reports are saved entity query tool (EQT) searches that are available for business objects in Agile PLM for Process. Ready reports allow users to quickly access data they need in the context they need it. This contextual access can also be used to access data across Agile PLM for Process modules. For example, a user can find all companies that could potentially source a material directly from the GSM material specification. Since ready reports has its own administration interface, reports can be created and managed by business users. No technical report writing skills are necessary.

  Reports can be saved as local browser bookmarks or individually shared with other users. Reports can even be shared to the entire user community by adding new navigation items throughout Agile PLM for Process applications. Refer to the *Agile Product Lifecycle Management for Process Navigation Configuration Guide* for more information. This method is described in Chapter 3, "Using Ready Reports".
- **Custom Reports**—You can also configure custom reports for the Agile Product Lifecycle Management (PLM) for Process Reporting module. All reports will use a reporting service like Oracle BI Publisher or SQL Server Reporting Services. However, PLM for Process allows you to execute these reports in different ways. Depending on your usability needs, environment requirements and security requirements around parameters, either choice is valid.
  - **Custom Report Configuration**—This approach allows you to execute the report from within PLM for Process. You can use the PLM for Process custom report UI interface and the report can be returned to the user in PDF format.

While this involves more complexity during the configuration of the report, this keeps the user within the PLM for Process application and security filtering can be applied to report parameters. For example, if a specification is required as a parameter, PLM for Process UI tools can be used to filter the user's available choices using core application security rules like GSM BU Security. You would also use this approach when you don't want to set up user access in the reporting application. More information around configuring this approach can be found in the Custom Report Configuration Section of the *Agile Product Lifecycle Management for Process Reporting Guide* found in the feature pack.

- **BI Publisher Integration**—This approach allows the user to execute reports within a reporting application. We recommend Oracle BI Publisher and offer out of the box reports that can be leveraged. If the user has appropriate roles in BI publisher they can customize the report layouts as well as create new reports based on the provided data models. More information around configuring this approach can be found in the BI Publisher Integration section of the *Agile Product Lifecycle Management for Process Reporting Guide* found in the feature pack.

- **Printing**—PLM for Process also allows specification print views directly from GSM. The appearance of these print outs is configurable. See the *Agile Product Lifecycle Management for Process Print Extensibility Guide* in the feature pack for more information.

Refer to Appendix C, "Best Practices" for more information on common scenarios that might help you determine which reporting method best suits your needs.

# 2

# Using Queued Search Reporting

This chapter describes the capabilities and applied uses of the Reporting product. It includes the following topics:


- Getting Started with Queued Search Reporting
- Custom Layouts


## Getting Started with Queued Search Reporting

The Reporting application enables you to create queued search reports, create reporting layouts, and run customized, third-party reports.


### Accessing Reporting

To access Reporting, select **RPT** from the Applications menu.

### Using the Reporting Page

Figure 2–1 shows the basic Reporting search page, which consists of fields that are defined below.

***Figure 2–1 Reporting page, Queued Searches***

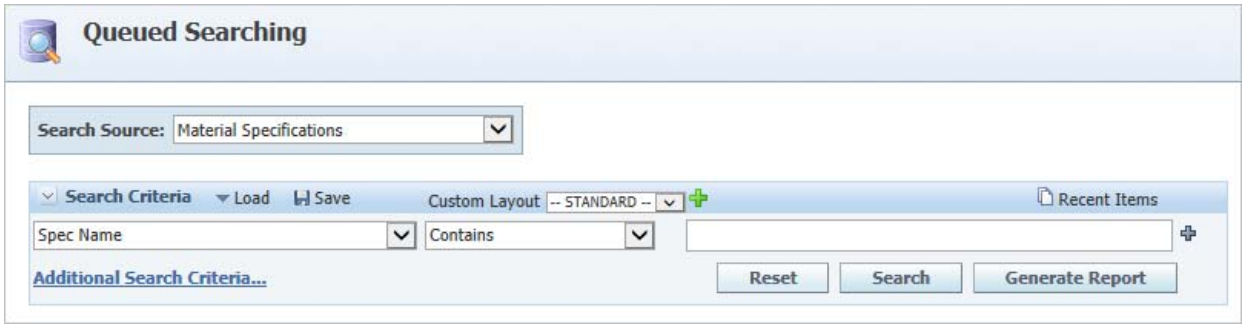


#### Search Field Definitions

- Object name—Displays a drop-down list of object types that are the information the report will be performed on.
- Key field list—Displays a drop-down list of criteria based on the selected object type.
- Operator—Displays a drop-down list of operators based on the criteria that you choose in the key field list. Examples include Equals, Not Equals, Contains, and Starts With.

- Search term—Further define your report by entering specific text or numbers related to the first two report fields. If this field is preceded by an add data icon, click the icon to view a dialog box with available choices.
- ( ) more criteria—Enables you to display another row of search criteria fields. This acts as an "and" function, which narrows your search results.
- ( ) less criteria—Removes a row of search criteria fields. Displays once the more criteria option has been selected.
- Show Per Page—Sets the number of search results to display at one time.

The Reporting search page includes the following buttons and links:

- **Load**—Loads a saved search.
- **Save**—Saves search criteria in a reusable library. Use this option if you use certain search criteria often.
- **Recent Items**—Displays a list of recent search items.
- **Additional Search Criteria**—Displays a dialog box where you can specify extended attributes or custom sections as search criteria. The available choices are defined by the object you selected in the Object name field. Refer to the *Oracle Agile Product Lifecycle Management for Process Getting Started Guide* for more information about searching for custom data.
- **Reset**—Clears all search criteria fields and results.
- **Search**—Displays your search results. The number of search results returned is limited to 500 entries. If your report generates more than 500 matches, the report must be generated and queued up. See "Viewing Queued Reports" on page 2-6 for more information.
- **Generate Report**— Generates your report results.
- **Custom Layout**—Defines the report layout. Custom layouts are explained in greater detail on page 2-7.
- **Export**—Writes the search results to an Excel file and displays a dialog box for downloading or viewing the exported file.


## Saving Search Criteria

Once you have entered your search criteria, you can save those criteria for later use. This feature can be a great help when search criteria become very complex.

To save search criteria:

1. Enter your search criteria.
2. Click **Save**. A Save Search Criteria As dialog box displays, as shown in Figure 2–2.

*Figure 2–2 The Save Search Criteria As dialog box*

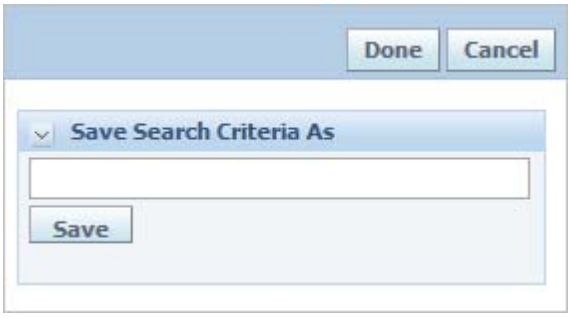


3. Type a descriptive name for the search criteria to save and click **Save**.


After you have saved one or more searches, you can easily retrieve saved search criteria.

> **Note:** Only the search criteria is saved; the contents of the report and the custom layout are not saved.

To retrieve a saved search:

1. On any search form, click **Load** and then select **Load Saved Search** from the drop-down list. A dialog box displays, showing a list of all of the searches that you have saved, as shown in Figure 2–3.

*Figure 2–3 Saved searches dialog box*

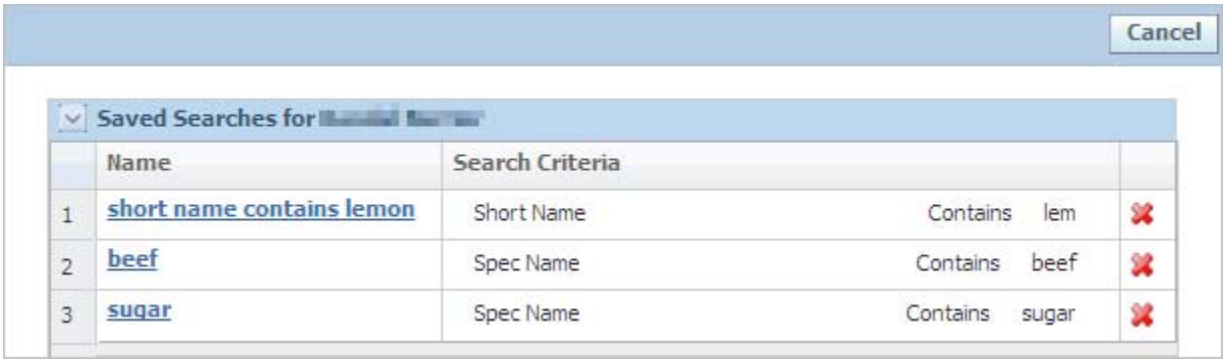


2. Click the linked name of the saved search to load the criteria. Reporting closes the dialog box and loads the saved search criteria into the main search page.

## Running a Report

You can create queued search reports based on the following Global Specification Management (GSM) specifications/objects:

- Material Specifications
- Menu Item Specifications
- Packaging Material Specifications
- Printed Packaging Specifications
- Product Specifications
- Trade Specifications
- Packing Configuration Specifications
- Delivered Material Packing Specifications
- Equipment Specifications
- Formulation Specifications
- Labeling Specifications
- Master Specifications
- Nutrient Profiles
- Activities
- LIO Profiles
- Component Catalog
- Global Successions
- Smart Issue Requests
- Testing Protocols

You can also create queued search reports based on the following Supply Chain Relationship Management (SCRM) entities:

- Facilities
- Companies
- Spec Related Sourcing Approvals
- Non-Spec Related Sourcing Approvals
- Supplier Document Management
- SAC Document Management
- Non-Spec SAC Document Management

Queued search reports can also be based on the following eQuestionnaires (eQ) types:

- Material Questionnaires
- Packaging Questionnaires
- Printed Packaging Questionnaires
- Product Questionnaires
- Trade Questionnaires

As well as the following Product Quality Management (PQM) objects:

- PQM Actions
- PQM Audits
- PQM Issues

and Nutrition Surveillance Management (NSM) objects:

- Nutrient Analyses
- Nutrient Composites

You can create queued search reports based on the following ADMN's Custom Data:

- Custom Sections
- Extended Attributes

As well as New Product Development's (NPD) objects:

- Innovations/Sales Pipelines
- Projects
- Strategic Briefs

Document Repository's (DRL) DRL Documents,

and User Group Management's (UGM):

- Users
- Groups

Report attributes vary depending on the business entity as well. For example, to run a report for a facility, the report attributes are fields within a facility profile, including (but not limited to):

- Facility name
- Company name
- Sourcing taxonomy

Specify which attributes to include on a report using Custom Layout feature, as described on "Custom Layouts" on page 2-7.


To perform a report, select **RPT > Queued Searches > Queued Searching** from the left navigation panel. The Reporting search page displays. Select a business entity from the **Object** name drop-down list, then specify search criteria values in the search fields. Click **Search**. The search results table displays all data objects matching the search criteria, in ascending order by default.

## Generating a Report

Click **Generate Report** to submit reports to the report generation queue. The **Generate Report** button is found on the Reporting page, as seen in Figure 2–1 on page 2-1. When a report request in the queue is processed, it will be created or saved in Excel format so that you can click the presented link to download, open, or save it. The report can also be saved in a comma delimited format.

After you click **Generate Report**, a dialog box is displayed, as shown in Figure 2–4. Fill in the **Report Name** (required) and **Description** fields, then click **Save**.

*Figure 2–4 Generate Report dialog box*

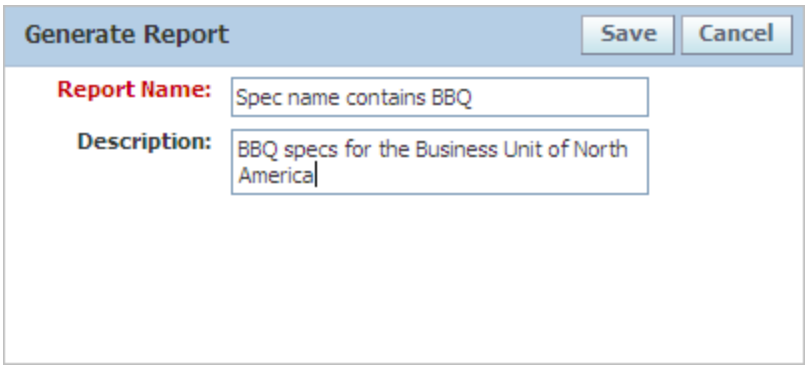



When you click **Save**, the report is added to a queue for processing offline.

## Viewing Queued Reports

To view reports that have been queued, click **RPT > Queued Searches > Search Queue** from left navigation panel. The Reports Queue page, shown in Figure 2–5, displays report details. The Status column displays the status of the report as indicated by a red, amber, or green bar.

*Figure 2–5 Reports Queue page*

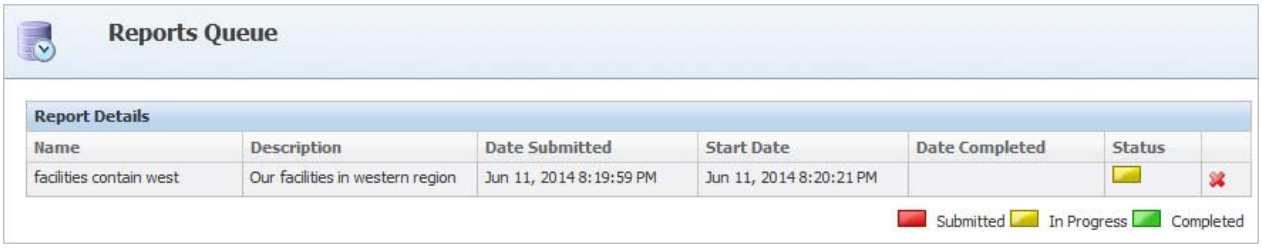


### Report Status

The **Status** column displays one of the following statuses:

Red status means that the report request has been submitted but the report is not yet being generated.

Amber status means that the report is currently being generated.

Green status means that the report is ready. When the status turns green, the name of the report becomes a link. Clicking the link gives you the option to either view the report or save it. When the report is ready, the person who generated the report receives an email notification.

Reports that are run in the Reporting application are not limited in size like search results and can sometimes be very large. Reports are run in order of submission to the reporting queue.

# Custom Layouts

As previously mentioned, the setting you provide for custom layouts determines which fields are displayed on the report. Select a layout based on the purpose of the report. Access the User Customized Layout page by either:

- Clicking the add data icon next to the Custom Layout drop-down on the Reporting search page. Refer to Figure 2–1, on page 2-1 for more information.

  Or

- Select **RPT > Queued Searches > Custom Layouts** from the left navigation panel.


## Defining a Custom Layout

As Figure 2–6 shows, the User Customized Layout page displays all the object types on which queued searches can be created. Select an object type, and then click the edit icon to display all the defined layouts for that object type. Figure 2–7 shows all the custom layouts for the Facilities object type. In this example, "Summary View" is the default layout that will be displayed when you run a report on Facilities.

***Figure 2–6 User Customized Layouts page***



***Figure 2–7 Available layouts for Facility object type; "Summary View" is the default layout***

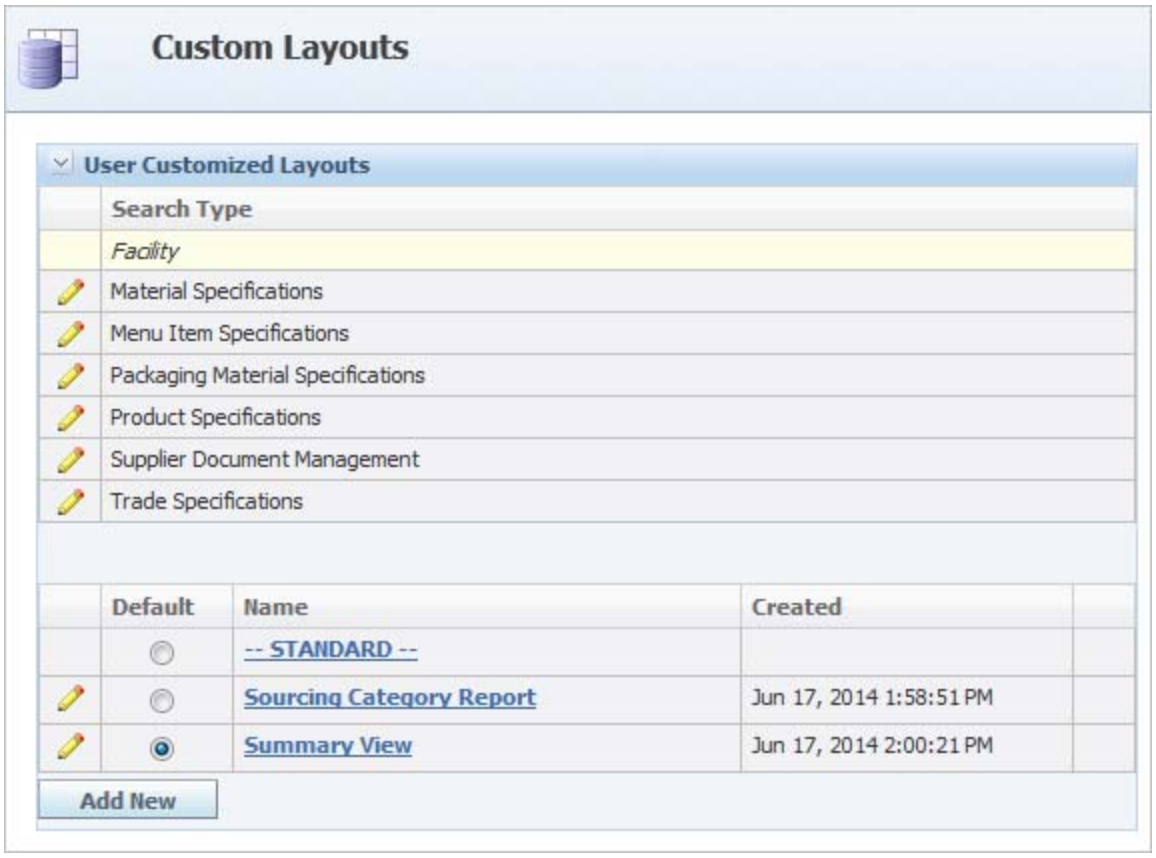


## Creating a New Layout

Click **Add New** to create a new layout. Next, type the name of the layout in the **Layout Name** field (required). Remove the fields not required from the Columns section. For details, refer to "Modifying a Layout" on page 2-12.

Figure 2–8 shows the new layout page for Facility.


***Figure 2–8 Facility page***

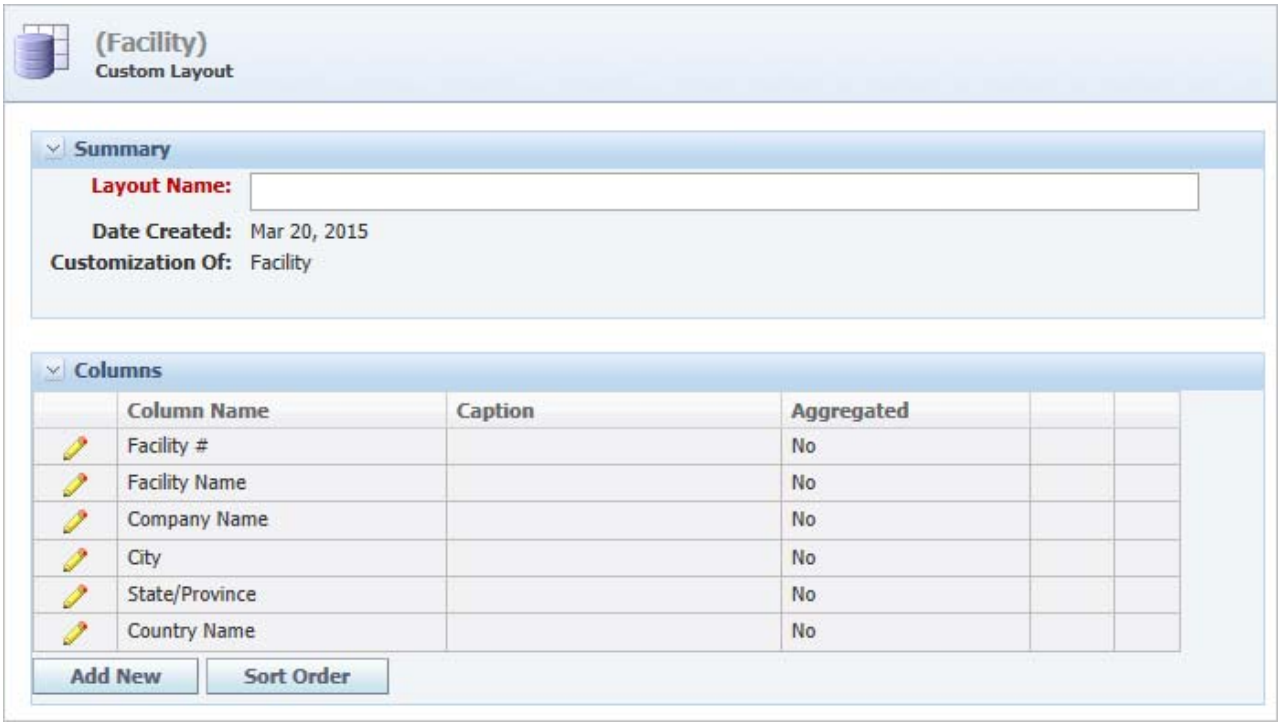

## Marking a Layout as Default


Each object type has a default, out-of-the box layout called "--STANDARD--". These standard layouts will be used if you do not create custom layouts for the object types.

***Figure 2–9 Marking a default layout***

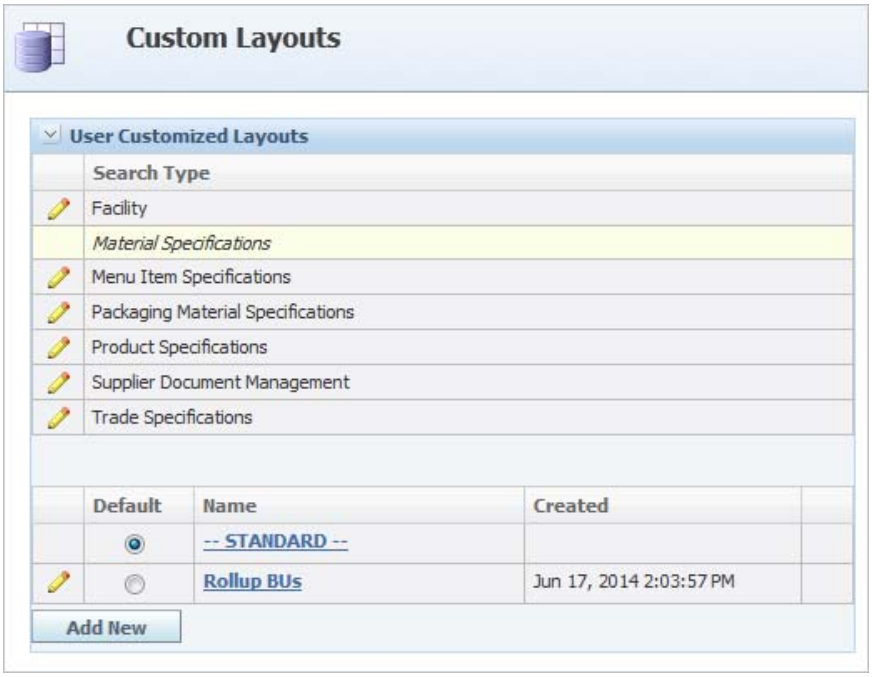


On the Reporting page, the default custom layout is marked with an asterisk, as shown in Figure 2–10.

***Figure 2–10 Custom Layout with asterisk***

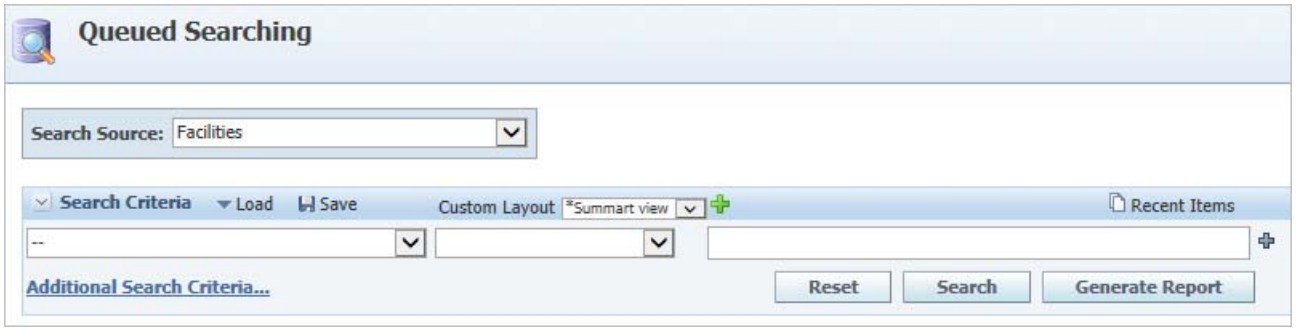


## Modifying a Layout

You can modify only the user-defined report layouts.

To modify a custom layout:


1. In the User Customized Layouts section, click the linked field name of the layout that you want to modify. RPT displays the layout page for the selected item. The Columns section displays all the columns that are in the current layout.

***Figure 2–11 Modifying a layout for Facility, Summary View***

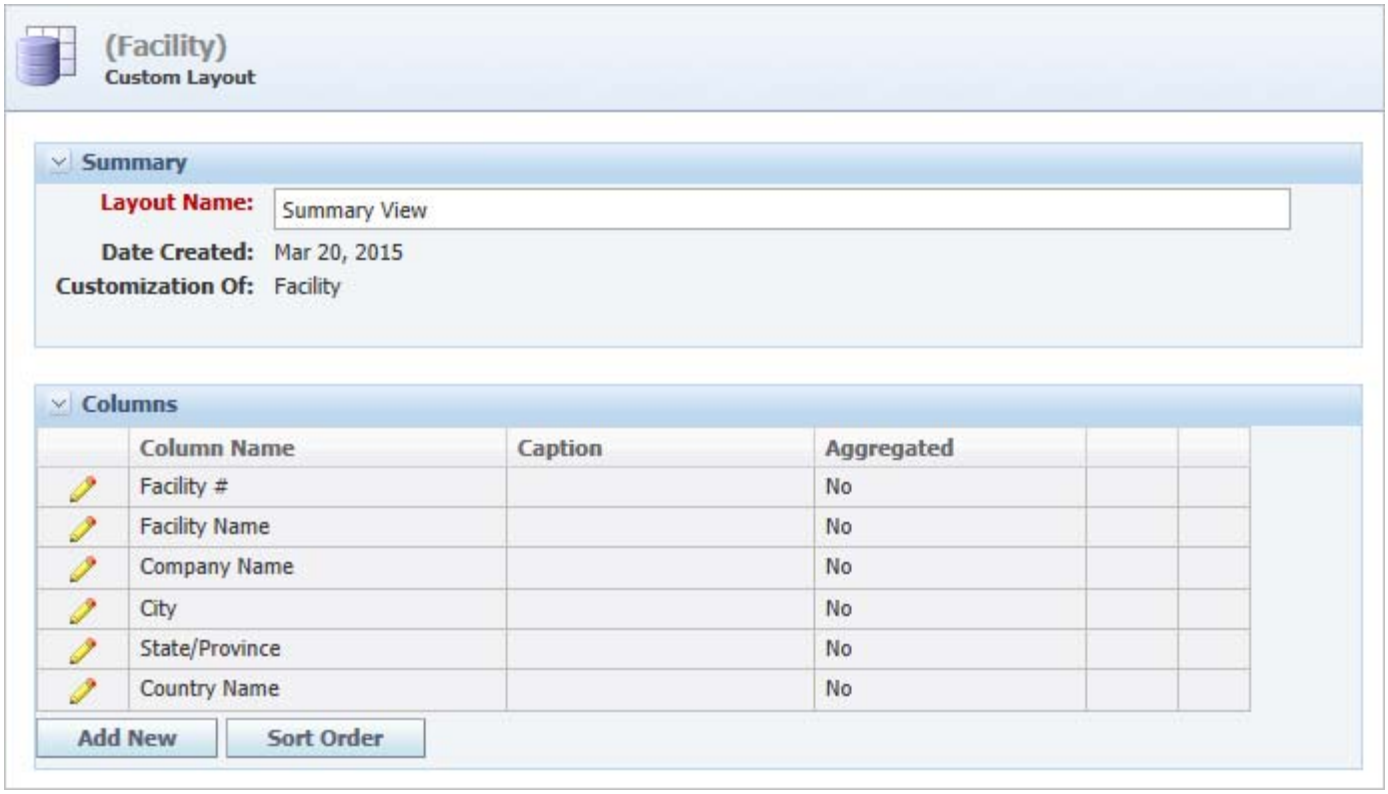


2. To edit a column, click the edit icon in the leftmost column next to the column name.
   - To customize the column name, provide a name in the **Caption** field.
   - To change the position of the columns, click Sort Order. In the Sort Order dialog box to assign sort priority and direction, and then click **Done**.

*Figure 2–12 Sort Order dialog*

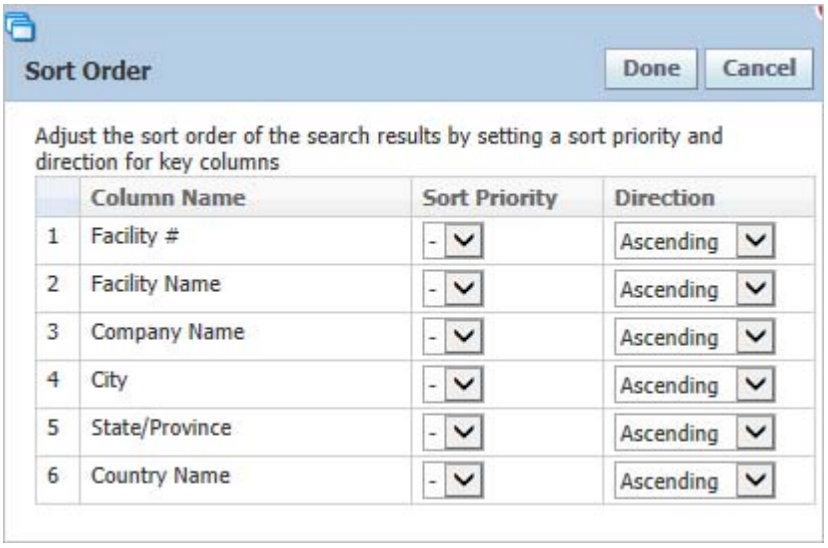


3. To remove a column, click the edit icon in the leftmost column next to the column name. If the column is removable, the delete icon displays in the rightmost column. Clicking the delete icon removes the column from the layout.
4. Click **Save**.

To add new fields to a layout:

1. Click **Add New** at the bottom of the page. A dialog box displays all the fields that you can add to the layout.
2. Select one or more fields.
3. Click **Done**.
4. Click **Save**.

### Using the Aggregated Feature

As seen above in Figure 2–11, the layout page contains the Aggregated column. For some columns you can use the aggregated feature to combine multiple data results in a reporting cell separated by a comma ",", semi-colon ";" or a new line. By default, the feature is set to "No".


## Deleting a Layout

You can delete only the user-defined report layouts.

To delete a layout:

1. Click **RPT > Queued Searches > Custom Layouts** from the left hand navigation panel. The User Customized Layouts page is displayed.
2. Select a business object. Custom layouts for the business object are displayed at the bottom of the page, as shown in Figure 2–13.

***Figure 2–13 User Customized Layout page***

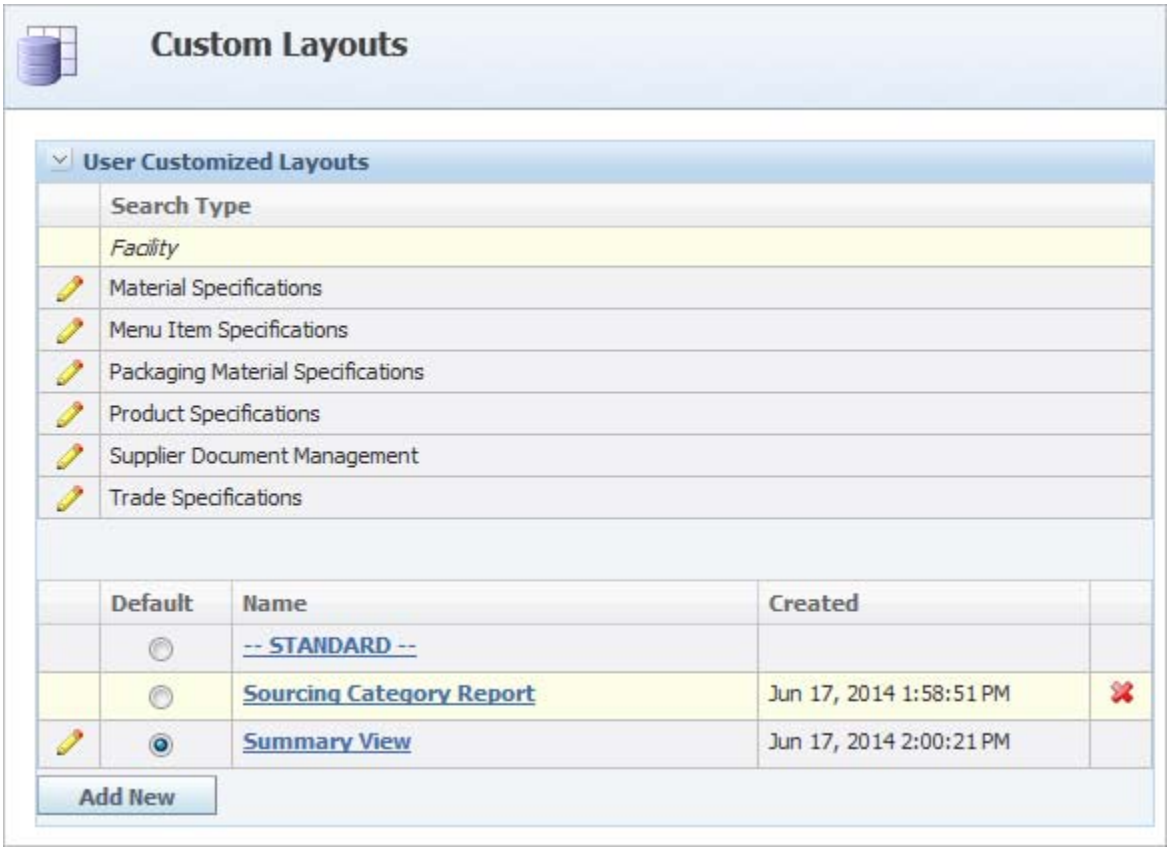


3. Click the edit icon in the leftmost column next to the layout you want to delete. A delete icon displays in the rightmost column. In Figure 2–13 above, the Sourcing Category Report row is in edit mode.
4. Click the delete icon to delete the layout. The Reporting application displays a dialog box prompting you to confirm the deletion.
5. Click **OK** to delete the layout.

# 3

# Using Ready Reports

This chapter describes how to use the Ready Reports feature in Agile PLM for Process and includes the following topics:


- Overview
- Assigning Roles
- Assigning Roles
- Accessing Ready Reports
- Ready Reports Listing Page
- Ready Report Details Page
- Ready Report Creator Page
- Using Contextual Variables
- Using Ready Reports in Agile PLM for Process Applications
- Security and Access
- Adjusting Report Views


## Overview

Ready Reports allow users to quickly access data they need in the context they need it. Ready reports are saved entity query tool (EQT) searches that are available for business objects in Agile PLM for Process. Since ready reports has its own administration interface, reports can be created and managed by business users. No technical report writing skills are necessary.

Reports can be saved as local browser bookmarks or individually shared with other users. Reports can even be shared to the entire user community by adding new navigation items throughout Agile PLM for Process applications. Refer to the *Agile Product Lifecycle Management for Process Navigation Configuration Guide* for more information.

### Usage Examples

The possibilities around how you use ready reports are virtually endless. Here are a few common use cases that can be accomplished with ready reports.

1. Find all finished goods with the allergen of X, created in the last 90 days.
2. Show me all packaging specifications that will be effective in the next 20 days.
3. Find all completed recalls performed in the last year.

4. Show all supplier documents associated to this material specification.
5. Find all facility audits that are due in the next 120 days.
6. Find all companies that could potentially source this material.
7. Show me all raw materials that are currently owned by Employee X.
8. Find all NPD projects in stage 2, 3 or 4 slotted for plant X.
9. Find all PQS sessions performed in the last 10 days at this location.

## Business Objects

Ready reports are available for the following business objects:

**ADMN**

- Custom section
- Extended attribute

**Component Catalog**

- Component Catalog term

**DRL**

- DRL document

**eQ**

- Material eQuestionnaire
- Packaging eQuestionnaire
- Printed packaging eQuestionnaire
- Product eQuestionnaire
- Trade eQuestionnaire

**GSM**

- Delivered material packing specification
- Equipment specification
- Formulation specification
- Global succession request
- GSM activity
- Labeling specification
- LIO profile
- Master specification
- Material specification
- Menu Item specification
- Nutrient profile
- Packaging specification
- Packing configuration specification

- Printed packaging specification
- Product specification
- Testing protocol
- Trade specification

**NPD**

- Innovations/sales pipeline
- Project
- Strategic brief

**NSM**

- Nutrient analysis
- Nutrient composite

**PQM**

- Action
- Audit
- Issue

**PQS**

- Lot sample
- Session
- Scorecard

**SCRM**

- Company
- Company/facility SDM
- Facility
- Non specification-related sourcing approval
- Non specification-related sourcing approval SDM
- Specification-related sourcing approval
- Specification-related sourcing approval SDM
- Contact profile

**UGM**

- Group
- User

**WFA**

- GSM workflow process template
- PQM workflow process template
- SCRM workflow process template

# Assigning Roles

Two roles exist for ready reports. The user must have one of these roles to access the ready reports administration application. Roles can be added using the UGM application.

**[READY_REPORT_ADMIN]**—This role allows a user to access the ready reports administration application. This user can create ready reports as well as edit reports they originated.

**[READY_REPORT_SUPER_ADMIN]**— This role allows everything READY_REPORT_ADMIN allows however this role allows the user to adjust the Max Results field. Editing the Max Results field could greatly affect performance so this role should be reserved for a more technical administrator.

# Accessing Ready Reports

Once a ready report is installed, the administrator accesses them by clicking **Ready Reports** in the top menu bar or in the left navigation panel of the application.

***Figure 3–1 Ready Reports option, top menu bar***

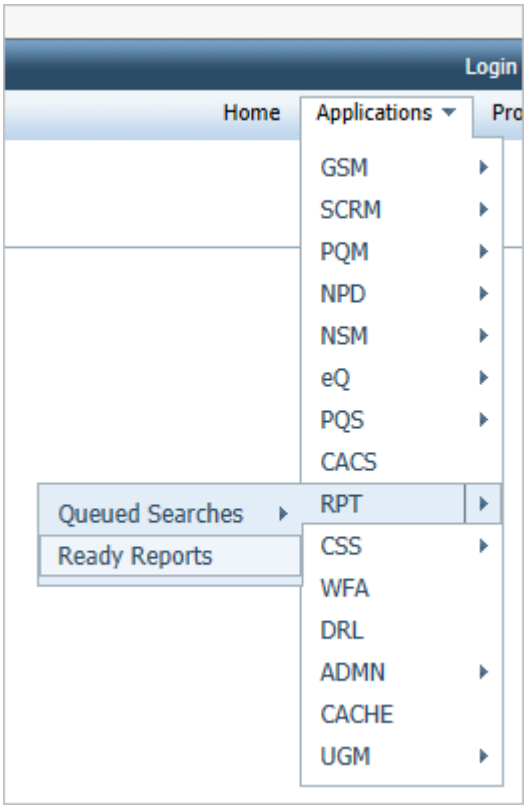




***Figure 3–2 Ready Reports option, left navigation panel***



Choosing these options shows the Ready Reports listing page, which lists saved ready reports and is used to create new reports, shown below.

## Ready Reports Listing Page

***Figure 3–3 Ready Reports listing page***

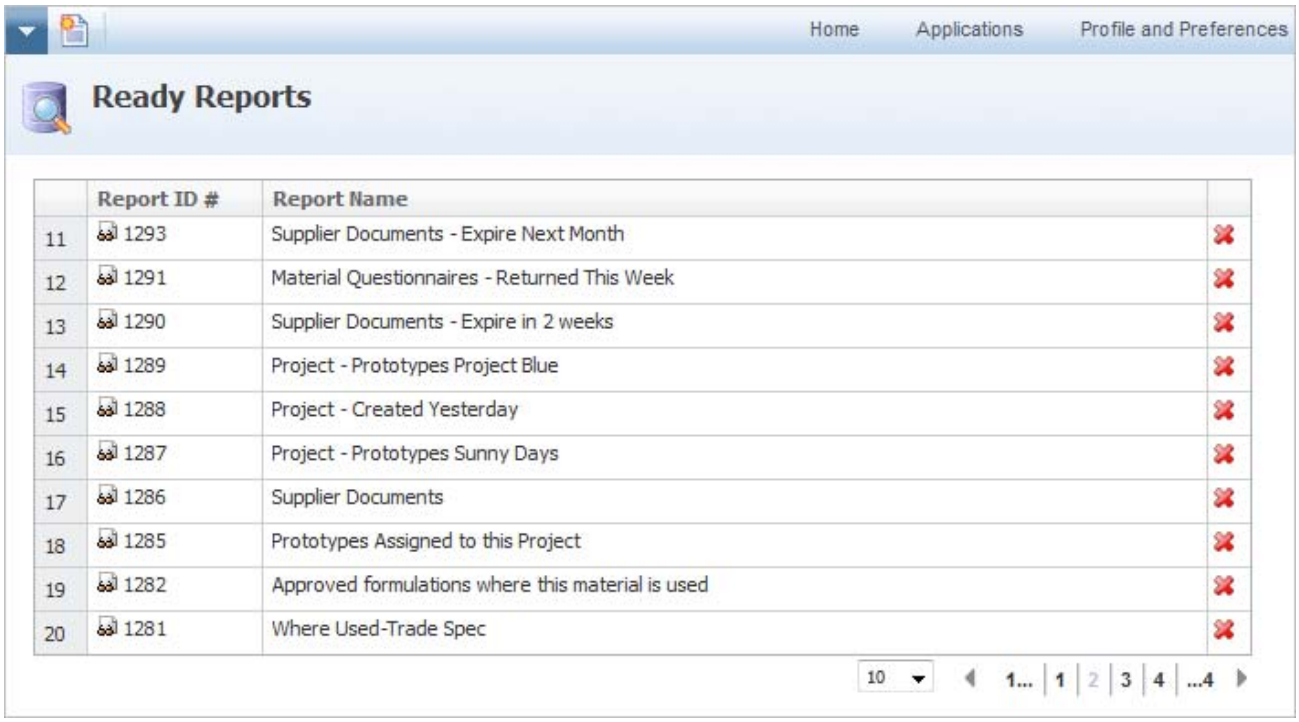



- To preview a report, click the view details icon.
- To edit a report, click anywhere in the corresponding row. The Ready Reports Details page is displayed, as shown below.
- To delete a report, click the delete icon. You will be prompted to confirm the deletion; click **OK** to delete the report, or **Cancel** to cancel.
- To create a new report, click the create new icon or select **New** from the action menu. The Ready Reports Creator Page is displayed. Its use is described on "Ready Report Creator Page" on page 3-6.

## Ready Report Details Page

This page displays when the administrator selects a report from the Ready Reports listing page. The report opens in edit mode.

***Figure 3–4 Ready Report details page***

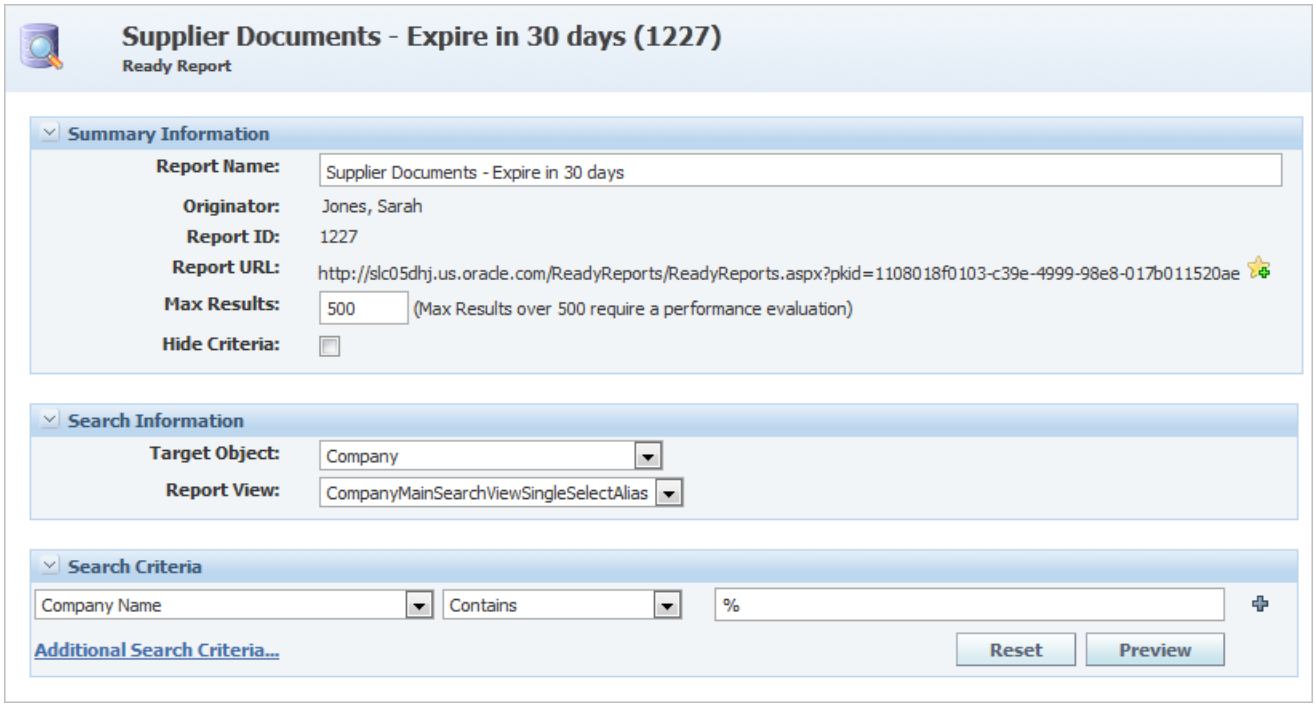


## Ready Report Creator Page


This page displays when the user creates a ready report by selecting the **New** menu option or the create new icon. This page allows users to build a ready report. Results can be previewed by clicking **Preview**.

---

**Note:** If the report is using active object, the Preview button will not display search results. Instead a message is displayed indicating search results are not available.

---

*Figure 3–5 Ready Report Creator page*

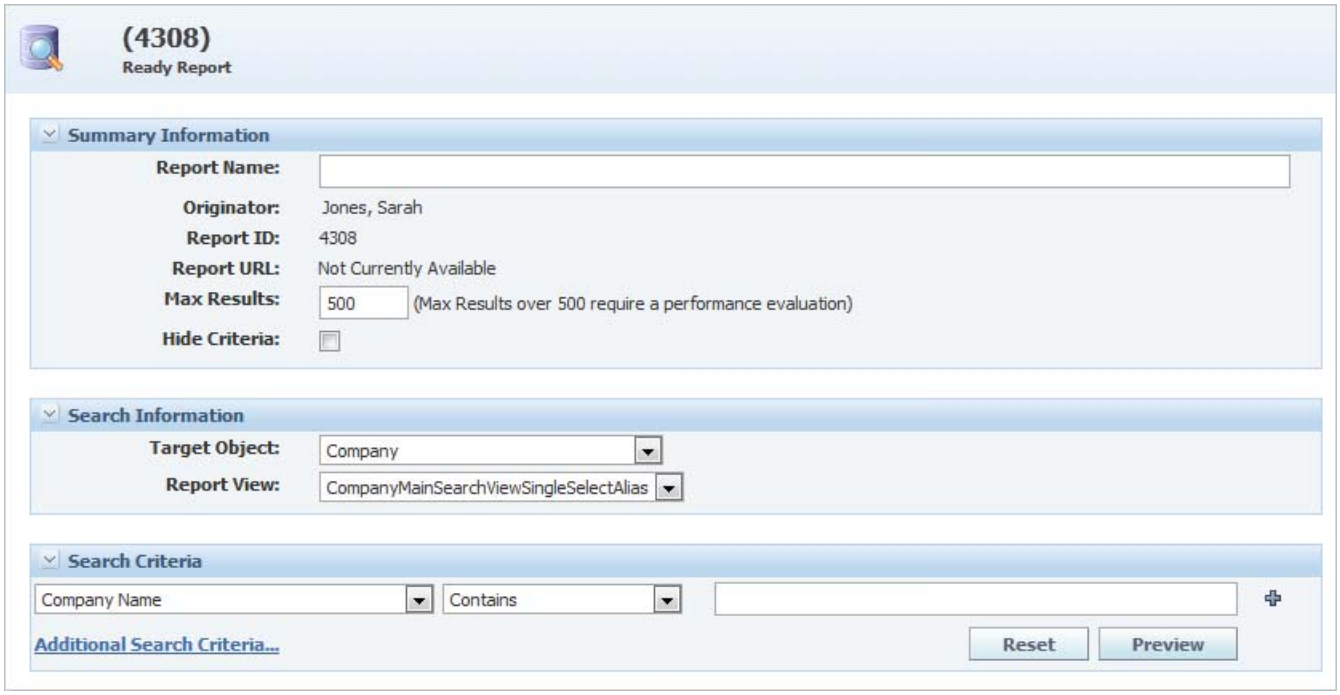


The ready report page is comprised of the Summary Information section, Search Information section, and Search Criteria section.

### Summary Information Section

This section defines the ready report. Key fields include:

**Report Name**—Name associated with the ready report. This will be used as the title for the popup where the ready report is displayed. This is a required field.

**Originator**—System-assigned user who created the report. Only the originator can view and edit this report in the ready reports administration application.

**Report ID**—System-assigned ID.

**Report URL**—The actual URL to be used to access the ready report. This could be used on its own or included as part of a navigation extension. For more information on the navigation extensions, please refer to the *Agile Product Lifecycle Management for Process Navigation Configuration Guide*.

> **Note:** When active object contextual variables are included in criteria, this URL has to be accessed using a navigation extension.

**Max Results**—Maximum number of search results returned. This field is visible to users with the [READY_REPORT_SUPER_ADMIN] role. Note: Use caution when adjusting this field beyond 500 items; doing so could have large performance implications.

**Hide Criteria**—If checked, search criteria are hidden in consumed ready reports. This allows you to lock down a ready report criteria set. When it is essential that end users are not allowed to adjust the ready report results, then it should be hidden.

### Search Information Section

This section contains two fields that define the search:

**Target Object**—Target object defines the object the search will be performed against. This could be any of the objects defined in "Overview" on page 3-1.

**Report View**—Defines the fields that can be used in the search criteria as well as the search result columns. Views and available fields are detailed in the section "Adjusting Report Views" on page 3-14.

### Search Criteria Section

The search criteria define the actual data that will be used to determine the report results. Criteria available will depend on the report view that is selected. There are two types of criteria that can be added as search criteria:

- Manual Criteria—The ready report itself declares the search item. The search item is manually saved by the ready report administrator. For example, Classification equals "Critical". Critical was manually placed by the ready report administrator and will always be "Critical" no matter where the ready report is executed from. See below for more information on using the search criteria tool.
- Contextual Criteria—When using contextual criteria, the object the user is on when executing the ready report will decide the search item. For example, assume the user is on a material specification with the classification of "Active Ingredient." When the user executes the ready report from that material specification, the criteria will be Classification equals "Active Ingredient." If the user was on a material specification with a classification of "Critical," then the criteria would use "Critical" as the search item. Some contextual fields could contain multiple selections like preferred cross reference. If the field contains multiple selections the contextual value may remain blank. See the "Using Contextual Variables" on page 3-9 for more information about the available contextual variables.

To find an object using the search page, set search criteria as you normally would, click **Search**, and view returned results.

The search page includes the following buttons:

**Reset**—Clears all search criteria fields and results.

**Preview**—Previews your search results including the Search Results section in a pop-up window. If the search includes an active object contextual variable, clicking this button returns an error message.

The more criteria icon displays to the right of the search term field. When clicked, more criteria creates another row of the main three search fields. You can use additional rows to enter additional search parameters. For example, you can search for all specification names that contain "Milk" that are in the "Approved" status.

This less criteria icon appears when additional search rows are added using the more criteria icon.

Additional buttons appear to the right of the search term field if contextual variables are available, as described in "Using Contextual Variables" on page 3-9.

#### Additional Notes about Search Criteria

1. At this time "blind" searches, where search criteria are empty, are not allowed. While the system allows you to save a blind search, when the search is run, an error is returned stating no search criteria were defined.

2. When searching using only additional search criteria, you must include a wildcard search in the main search criteria section. For example, Spec Name Contains %, then the additional search criteria for the extended attribute, breakdown item, or custom section.
3. The maximum number of criteria rows is 10, unless you are using relative dates. Relative dates count as 2 rows, so the maximum number of relative date fields without other criteria would be 5. If other criteria are defined, the number of date fields will vary. For example, if you have 8 other fields defined, you would only be able to use one relative date.

#### Search Results

The search results show the actual data that will be returned from the search that was created. Search result columns are determined by the report view. If the search includes an active object contextual variable, an error message is returned instead of results.

After completing the fields above, click **Save** or **Save & Close** to save the report.

## Using Contextual Variables


Ready reports allow you to use contextual variables. This means a ready report can use the user's context, location in the application, or date as search criteria. For example, a user can be on a material specification and run a ready report that finds all formulation specifications that use that material specification as an input that they are the owner of that are effective in the next 30 days.

---

**Note:** Contextual Variables that pull data from objects in other applications will not work for PQM object reports when PQM is configured to use a different database than the rest of the PLM for Process applications. PQM could also be set up to use a 3rd party applications instead of GSM, SCRM and NPD. Contextual variables that pull data from those areas that are configured to use third party applications will not work.

---

***Figure 3–6 Sample consumed ready report, delivered material specification***

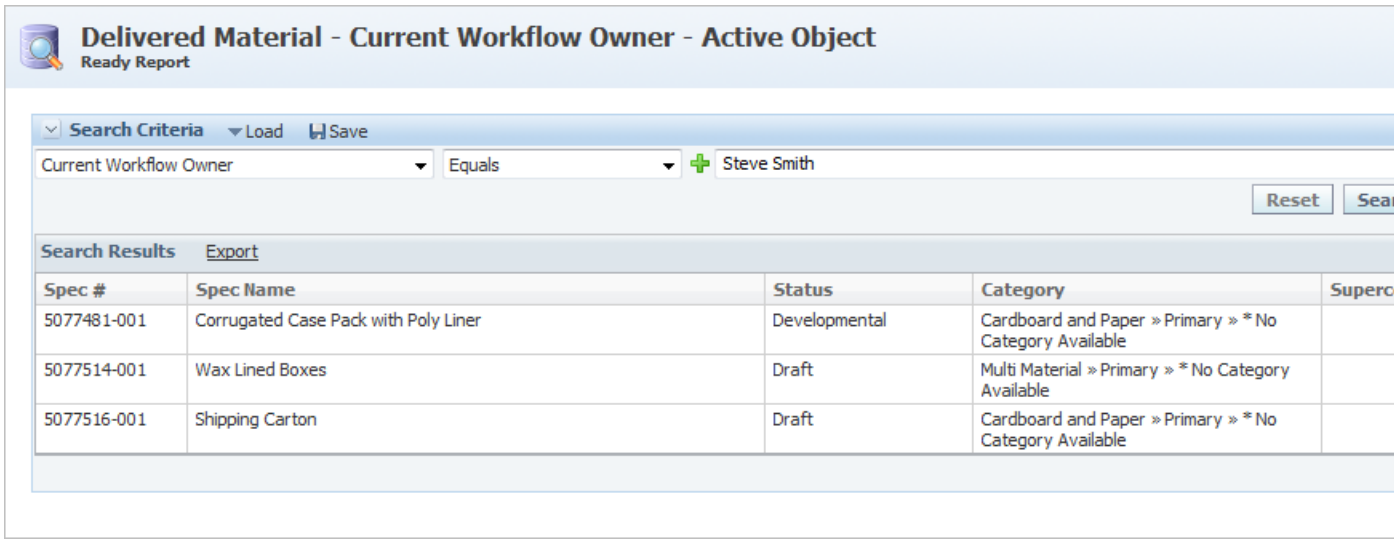

There are three categories of contextual variables available:

- **Object**—Allows you to use values from fields on an active object as input to the search criteria. For example, "Show me all supplier documents associated to this material." From a material or packaging specification the ready report can find all specification-related sourcing approval documents associated to the active specification the user is on.
- **User**—Allows you to use the current user running the report as input to the search criteria. For example, you can use the active user as a variable. This allows you to create reports like "Show me all trade specifications that I own" or "Show me all material specifications that I created."
- **Date**—Allows you to use date variables as search criteria. For example, to say the "Next 30 days" the system assumes today's date and adds 30 days to today's date for search criteria. Options available are:
  - L**ast (Today - X)** for the last X days
  - **Next (Today + X)** for the next X days
  - **Between (Today +/- X)** for a date range, for example, Today + or - 20 days

  This allows you to create reports like "Show me all company supplier documents that expire in the next 30 days."

You can add contextual variables in your search criteria by selecting one of the following icons:

- Click the active object icon to add the current active object as the search term
- Click the active user icon to add the current active user
- Click the relative date icon to add the current relative date.

The clear icon appears once you add the active object, active user, or relative date.

Not all criteria support contextual variables. For a full listing of supported variables see Appendix A, "Ready Reports Contextual Variables".

> **Note:** When using active object variables, ready reports can only be executed from contextual locations. This means they have to be added as navigation items and cannot be used as personal bookmarks or standalone URLS. This is because the context actually drives the report criteria; if executed from a bookmark the system has no context to pull criteria from.


To test your ready report with active object contextual variables without adding it to the navigation, the following URL can be used once your report is saved.

```
http://<URL>/ReadyReports/readyreports.aspx?pkid=<READYREPORTPKID>&ao=<ACTIVEOBJECTPKID>
```

**READYREPORTPKID**—This pkid can be found in the browser's address bar when you have the ready report open in **Ready Report Administration**. See Figure 3–7 below.

**ACTIVEOBJECTPKID**—This pkid can be found in the browser's address bar when you have the specification/object open. Note that not all objects will have the pkid in the browser's address bar. For these objects a navigation item has to be added to test the report.

*Figure 3–7 URL for testing ready reports containing contextual variables*

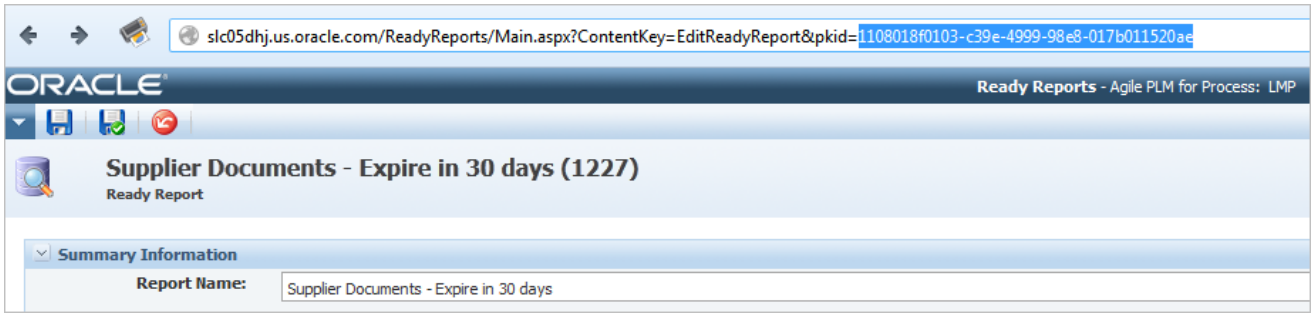


# Using Ready Reports in Agile PLM for Process Applications

Reports can be saved as local browser bookmarks or individually shared with other users. Reports can even be shared to the entire user community by adding new navigation items throughout Agile PLM for Process applications.

## Local Browser Bookmarks


The fastest and easiest way for a user to use a ready report would be to save the report as a local browser bookmark. This allows users to create relevant groupings of objects. For example, you can create a report that finds all formulations tied to a specific NPD project. Now the user will have one click access to every formulation they are currently working on within that project.

> **Note:** By nature of design, reports containing active objects cannot be bookmarked.

Once you have a ready report created, follow these steps to bookmark your report:

1. Open the Ready Reports Administration application.
2. Locate the ready report you would like to bookmark in the ready report listing.
3. Select view details icon.
4. Your ready report opens in a new browser window and from there you can add this page to your favorites by clicking **Add to favorites** in your browser, as Figure 3–8 shows below.

*Figure 3–8 Adding a favorite to your browser*

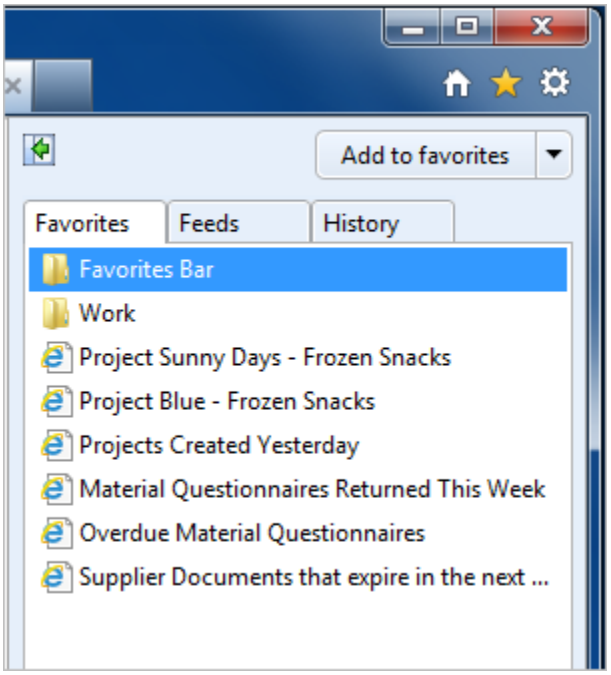


Or

1. Open the Ready Reports Administration application.
2. From the Ready Reports Details page, click the favorites icon to the right of the Report URL field.

A ready report can be shared with other users just by sharing the system-generated URL.

1. Open the Ready Reports Administration application.
2. Open the ready report you would like to share.
3. Copy the Report URL.
4. Paste the URL in email or instant message to share with other users.

**Note:** By nature of design, reports containing active object contextual variables cannot be shared via URL link.

## Sharing with the Entire User Base

Reports can even be shared with the entire user community by adding new navigation items throughout Agile PLM for Process applications. Navigation items can have their own security rules so based on your configuration only the users you want to share the link with will see the link. Navigation items can be added to any application and context can be very specific. For example, you can provide a report that allows users to see all expired supplier documents. It can be linked only to a material specification and seen by users in the group "Supplier Managers". The figures below show how navigation items might be added for NPD.

Note that reports containing active objects can be shared using this method.

*Figure 3–9 Icon from NPD*


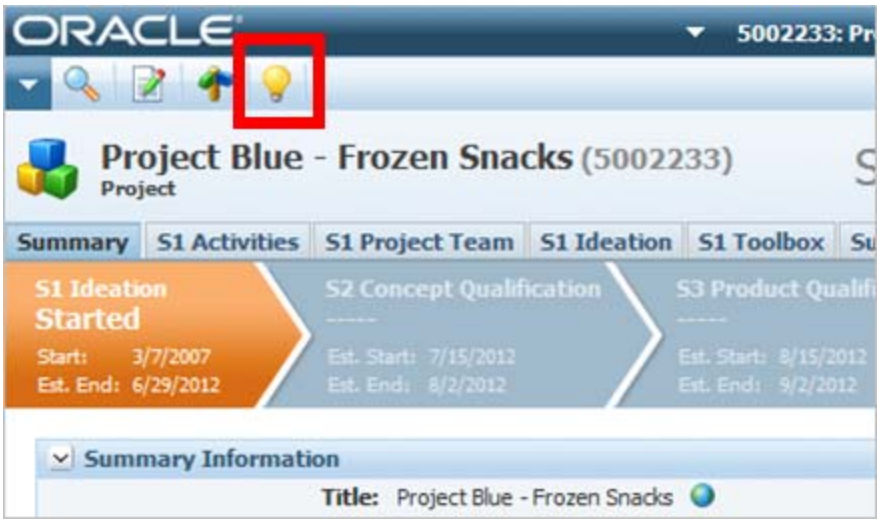



*Figure 3–10 Report run from NPD*

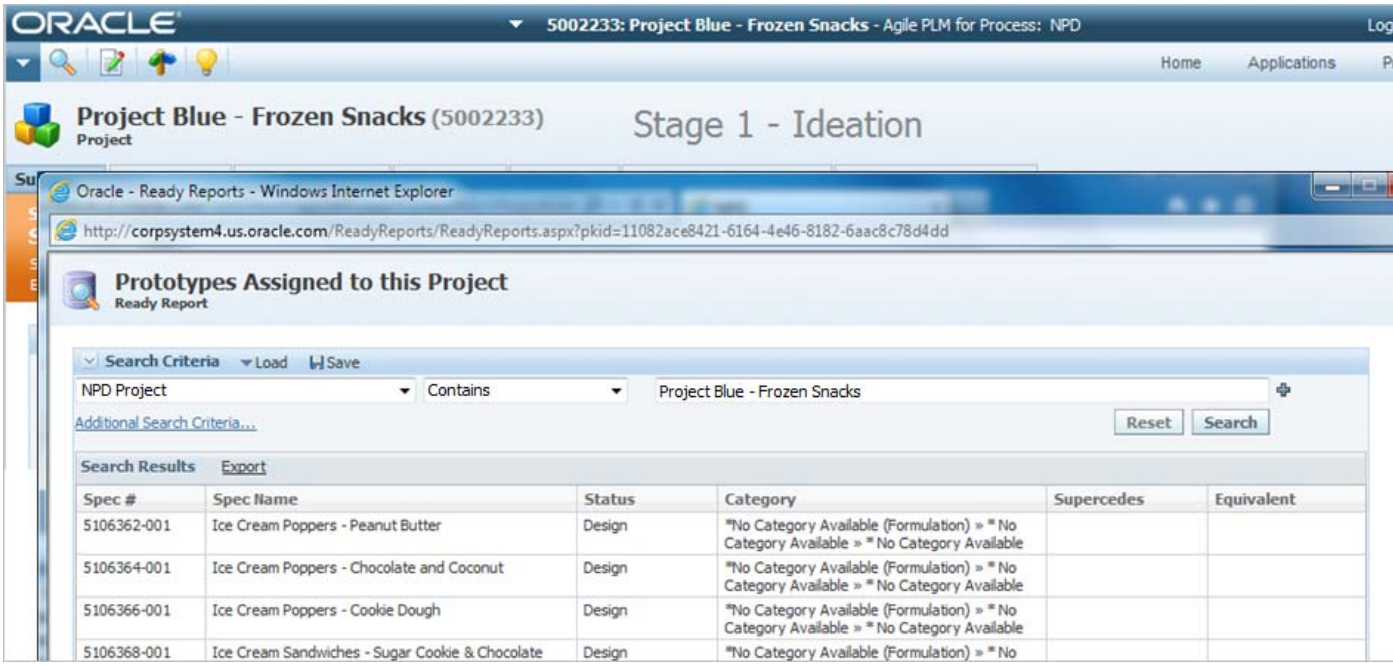


Refer to the *Agile Product Lifecycle Management for Process Navigation Configuration Guide* for more information.

# Security and Access

## Security

All ready reports support GSM and SCRM business unit (BU) security. See the *Agile Product Lifecycle Management for Process Security Configuration Guide* for more information.

## Visibility

All ready reports respect BU and workflow visibility.

## Site Access

Individual site access controls which ready reports administrators and end users have access to. For example, if users only have site access to SCRM but they are a ready report administrator, they will only see target objects related to the SCRM application. All other application objects are hidden from their view.

The same goes for end users. If the end users only have site access for GSM, they will not be able to execute a ready report that uses an SCRM target object. If attempted, the users see a No Permissions error. Site access is assigned in UGM. Refer to the *Agile Product Lifecycle for Process Administrator User Guide* for more information.

---

**Note:** Users with the NPD_PARTNER role will not be able to execute any NPD ready report, regardless of site access. Access to DRL is role-based so, users must have one of the following roles to access DRL: [DRL_CREATOR], [DRL_EDITOR], or [DRL_VIEWER].

---

### Ready Report Veto Plugin

If the out of the box security filters do not cover your specific use cases, the specification veto plugin can be used. For example, a user may have site access to GSM, but you do not want them to access a ready report that returns formulation specifications. A veto plugin can be deployed that checks the UGM user group and exact target object restricting the user's access.

### Specification Veto Plugin

The ready reports framework uses a veto handler to extend security logic. Custom security rules can be evaluated when determining the ability to execute a ready report. The specification veto plugin is an extension point available to all ready reports. The custom class evaluates the current ready report and returns a true or false giving access to the results of the report or not.

**Technical Documentation** Refer to the PluginExtensions document, located in the Extensibility Pack ReferenceImplementations\PluginExtensions\Documentation folder for more details.

**Available Reference Implementations** This plugin is an example of a ready report veto handler. In this example, if the users' last name is Janjua or ready report model is based on material specification, they will not be able to see a report.

The reference implementation file can be found in:

ReferenceImplementations\ReadyReport\ReadyReportVetoHandlerPluginDemo.cs

# Adjusting Report Views

Report Views can be extended. A report view allows you to customize the result columns returned for a ready report. There is a limit of 20 columns that can be returned as search results. To perform this extension, you will need to have access to the configuration files and permissions to reset IIS.

The choices of result columns are limited to what is included in the models listing found in Appendix B, "Ready Reports Models".

**WARNING:** When the ready reports application is upgraded, you will need to apply these configuration changes again. Comments are recommended so you can easily see which views were added.

## Terminology

Here are some general terms that are used.

**Models**—Models define which criteria and search result columns are available.

**Views**—Views define which criteria and result columns are actually shown to the user.

**Mandatory Property**—A property used in a view that filters data returned based on security, visibility or configuration rules.

## Configuration Files

New report views should be added to the ExtensionViews.xml file located inside the config\Extensions folder by completing the following steps:

1. Back up the ExtensionViews.xml file.
2. Make adjustments to the ExtensionViews.xml file.
3. Reset IIS and review your new report view within the ready reports UI.

## Report Views Structure

The report view node structure looks like this:

```
< ReportViewName >
<AllowedModels>
<Model>
    <MandatoryProperty>
    <SearchableProperties>
    <DisplayColumns>
        <ColumnInfo>
    </DisplayColumns>
</Model>
</AllowedModels>
</ReportViewName>
```

### Model

This represents the search model being used in the view. The name will generally tell you what target object you are running your report against. For example, most target objects in GSM are named: "Main [Type] Specification". A specific example, the packaging specification search page, uses the following view:

```
<Model active="true" name="Main Packaging Specification" alias="lblType1009"
orderByColumns="-" captionColumn="0" primaryKeyColumnName="SpecID">
```

### MandatoryProperty

This represents the filters being applied to the search view. These should not be edited.

### SearchableProperties

This node is generally used to exclude certain search criteria based on configurations.

#### DisplayColumns

This node represents the actual result columns that are displayed to the user. Here is where columns can be removed or added.

The example below shows the result columns for the main packaging specification search in GSM.

```
DisplayColumns
    <ColumnInfo width="79" dataField="SpecNumber"
    dataFieldCaption="lblSpecNumber"/>
    <ColumnInfo width="256" dataField="SpecName" dataFieldCaption="lblSpecName"/>
    <ColumnInfo width="87" dataField="CurrentStatus"
    dataFieldCaption="lblSpecSummaryStatus"
    dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.WorkflowSta
    tusDataColumnTransformerFactory,EQTService"/>
    <ColumnInfo width="225" dataField="Taxonomy" dataFieldCaption="lblTaxonomy"/>
    <ColumnInfo width="102" dataField="Supercedes" dataFieldCaption="lblSupercedes"
    dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.SpecSuperce
    desDataTransformerFactory,PlatformExtensions"/>
    <ColumnInfo width="100" dataField="ctxSysEquiv"
    dataFieldCaption="lblContextSensitiveSysEquivCtlEquivalent"
    dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.GSMContextS
    ensitiveEquivalentDataTransormerFactory,PlatformExtensions"
    enableHandler="Class:Xeno.Prodika.EQTService.SearchablePropertyHandlers.Feature
    PropertyItemEnabledResolverFactory,EQTService$GSM.EQT.CrossReferences.Enabled"/
    >
</DisplayColumns>
```

### ColumnInfo

The ColumnInfo node represents the actual result column. It has the following available attributes:

**dataField**—The actual id for the data to be returned. Please refer to the included Available Views and Models Index for the ids that can be used.

**dataFieldCaption**—The translatable label that will be used as the column header. Please refer to the included Available Views and Models Index for the data field captions that can be used.

**Width**—This is the column width designated in pixels. Make sure when you remove of add a column the new total width remains at 849 pixels. For example, if you were to add a column that was 150 pixels in width that would bring the total to 999. You must remove width from the other existing columns so that it once again equals 849 pixels.

**dataTransformer**—This is code that transforms the data returned in a recognizable string to the user.

**isAggregatable**—Used to display results that have more than one value. If set to true, the results will be combined into a single row, otherwise, one row will be returned for each value. For example, multiple Business Units can be added to a specification so the report will return multiple values for a single column.

**aggregationDelimiter**—Character used to divide the aggregated results.

**Note:** Columns that are added will be sortable. However, these columns will only be sorting the string of text returned. So if you are returning a date or number in your column, sorting will not appear to be functioning correctly.

#### Example: Adding Business Unit to Packaging Search Results

1. Find the "Main Packaging Specification" search view inside ExtensionViews.xml.
2. Find the `<DisplayColumns node>`.

```
<DisplayColumns>
              <ColumnInfo width="79" dataField="SpecNumber"
    dataFieldCaption="lblSpecNumber"/>
              <ColumnInfo width="256" dataField="SpecName"
    dataFieldCaption="lblSpecName"/>
              <ColumnInfo width="87" dataField="CurrentStatus"
    dataFieldCaption="lblSpecSummaryStatus"
    dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.Workflo
    wStatusDataColumnTransformerFactory,EQTService"/>
              <ColumnInfo width="225" dataField="Taxonomy"
    dataFieldCaption="lblTaxonomy"/>
              <ColumnInfo width="102" dataField="Supercedes"
    dataFieldCaption="lblSupercedes"
    dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.SpecSup
    ercedesDataTransformerFactory,PlatformExtensions"/>
              <ColumnInfo width="100" dataField="ctxSysEquiv"
    dataFieldCaption="lblContextSensitiveSysEquivCtlEquivalent"
    dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.GSMCont
    extSensitiveEquivalentDataTransormerFactory,PlatformExtensions"
    enableHandler="Class:Xeno.Prodika.EQTService.SearchablePropertyHandlers.Fea
    turePropertyItemEnabledResolverFactory,EQTService$GSM.EQT.CrossReferences.E
    nabled"/>
</DisplayColumns>
```

3. Add a new Column node after the Equivalent column (ctxSysEquiv) using the Approved Business Unit dataField id, FieldCaption label, and appropriate width. Since the Approved Business Unit column can contain multiple values, the aggregation and dataTransformer attributes have been defined.

   <ColumnInfo width="125" dataField="ApprovedForUseBUDisplayName" dataFieldCaption="lblBusinessUnit" dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.BusinessUnitDataColumnTransformerFactory,EQTService" isAggregatable="true" aggregationDelimiter=", " />

```
<DisplayColumns>
              <ColumnInfo width="79" dataField="SpecNumber"
    dataFieldCaption="lblSpecNumber"/>
              <ColumnInfo width="256" dataField="SpecName"
    dataFieldCaption="lblSpecName"/>
              <ColumnInfo width="87" dataField="CurrentStatus"
    dataFieldCaption="lblSpecSummaryStatus"
    dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.Workflo
    wStatusDataColumnTransformerFactory,EQTService"/>
              <ColumnInfo width="225" dataField="Taxonomy"
    dataFieldCaption="lblTaxonomy"/>
              <ColumnInfo width="102" dataField="Supercedes"
    dataFieldCaption="lblSupercedes"
```

```
    dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.SpecSup
    ercedesDataTransformerFactory,PlatformExtensions"/>
              <ColumnInfo width="100" dataField="ctxSysEquiv"
    dataFieldCaption="lblContextSensitiveSysEquivCtlEquivalent"
    dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.GSMCont
    extSensitiveEquivalentDataTransormerFactory,PlatformExtensions"
    enableHandler="Class:Xeno.Prodika.EQTService.SearchablePropertyHandlers.Fea
    turePropertyItemEnabledResolverFactory,EQTService$GSM.EQT.CrossReferences.E
    nabled"/>
              <ColumnInfo width="125" dataField="ApprovedForUseBUDisplayName"
    dataFieldCaption="lblBusinessUnit"
    dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.Busines
    sUnitDataColumnTransformerFactory,EQTService" isAggregatable="true"
    aggregationDelimiter=", " />
</DisplayColumns>
```

4. To support 1024x768 resolutions, make sure your total width matches what it was before your addition. In this example the total width was 849 pixels. So you will need to remove 125 pixels of width from pre-existing column(s), like specification name.

   ```
   <ColumnInfo width="131" dataField="SpecName" dataFieldCaption="lblSpecName"/>
   ```

5. Reset IIS.
6. Go to a Ready Report and select the **Packaging Specification** target object and verify the new column appears.

## Adding New Report Views

New report views can be added by copying an existing view and changing the view name and corresponding attributes. This allows you to offer multiple report views per target object.

The report view node structure looks like the following. [ReportViewName] will appear in the report view drop down for the target object specified in the <Model> node.

```
<ReportViewName>
<AllowedModels>
<Model>
    <MandatoryProperty>
    <SearchableProperties>
    <DisplayColumns>
        <ColumnInfo>
    </DisplayColumns>
</Model>
</AllowedModels>
</ReportViewName>
```

# A

# Ready Reports Contextual Variables

This appendix contains a list of contextual variables that are supported in search criteria for ready reports for various applications. Refer to the ReadyReports.xml configuration file for further details.

## Contextual Variables

### DRL

| Search Model | Available Variables |
|---|---|
| **DRL Document** | Catalogs |
| | Classification |
| | Document Date |
| | Effective Date |
| | Expiration Date |
| | Originator |
| | Status |

### EQ

| Search Model | Available Variables |
|---|---|
| **All EQ models contain these variables:** | Additional Administrators (Users) |
| | Additional Administrators (Groups) |
| | Company Name |
| | Date Received |
| | Date Sent |
| | Due Date |
| | Primary Owner |
| | Status |

## GSM

| Search Model | Available Variables |
|---|---|
| **All models except Global Succession, Activity specification, and LIO profile contain these variables:** | Associated Specs (Name and Number) |
| | Category |
| | Created |
| | Current Workflow: Owner or Group |
| | Effective |
| | Last Edit |
| | Originator |
| | Short Name |
| | Status |
| | Workflow |

| Search Model | Available Variables |
|---|---|
| **Delivered Material Packing Specification** | Inactive |

| Search Model | Available Variables |
|---|---|
| **Equipment Specification** | Inactive |

| Search Model | Available Variables |
|---|---|
| **Formulation Specification** | Facility |
| | Inactive |
| | Input Item |
| | Input Item (plus alternates) |
| | NPD Project |
| | Output Item |

| Search Model | Available Variables |
|---|---|
| **Labeling Specification** | Inactive |

| Search Model | Available Variables |
|---|---|
| **Master Specification** | Inactive |

| Search Model | Available Variables |
|---|---|
| **Material Specification** | Known to Contain: Additives, Allergens, Intolerances |
| | May Contain: Additives, Allergens, Intolerances |
| | Does Not Contain: Additives, Allergens, Intolerances |
| | BD Component Term or Alias |
| | BD Component Term |
| | Classification |
| | Country of Origin |
| | Inactive |
| | Material Type |
| | Output Type |
| | Receiving Facilities |
| | Source Facility |

| Search Model | Available Variables |
|---|---|
| **Menu Item Specification** | Known to Contain: Additives, Allergens, Intolerances |
| | May Contain: Additives, Allergens, Intolerances |
| | Does Not Contain: Additives, Allergens, Intolerances |
| | Actual Label Claims |
| | Inactive |
| | Menu Item Build |
| | Menu Item Class |
| | Potential Label Claims |
| | Standard |

| Search Model | Available Variables |
|---|---|
| **Nutrient Profile** | none |

| Search Model | Available Variables |
|---|---|
| **Packaging Specification** | Inactive |
| | Item Type |
| | Receiving Facilities |
| | Source Facility |

| Search Model | Available Variables |
|---|---|
| **Packing Configuration Specification** | Inactive |

| Search Model | Available Variables |
|---|---|
| **Printed Packaging Specification** | Inactive |
| | Receiving Facilities |
| | Source Facility |

| Search Model | Available Variables |
|---|---|
| **Product Specification** | Known to Contain: Additives, Allergens, Intolerances |
| | May Contain: Additives, Allergens, Intolerances |
| | Does Not Contain: Additives, Allergens, Intolerances |
| | BD Component Term or Alias |
| | BD Component Term |
| | Inactive |
| | Receiving Facilities |
| | Source Facility |

| Search Model | Available Variables |
|---|---|
| **Trade Specification** | Known to Contain: Additives, Allergens, Intolerances |
| | May Contain: Additives, Allergens, Intolerances |
| | Does Not Contain: Additives, Allergens, Intolerances |
| | Actual Label Claims |
| | Brand |
| | BD Component Term or Alias |
| | BD Component Term |
| | GTIN/UPC/EAN |
| | Material Specification |
| | Packaging Materials |
| | Potential Label Claims |
| | UDEX Classification |

| Search Model | Available Variables |
|---|---|
| **Global Succession** | Created By |
| | New Specification: Name and Number |
| | Specification to Supercede: Name and Number |

| Search Model | Available Variables |
|---|---|
| **GSM Activity** | Activity Type |
| | Current Workflow: Owner or Group |
| | Effective |
| | Inactive |
| | Last Edit |
| | Originator |
| | Primary Item Specification: Name and Number |
| | Related Items Specification: Name and Number |
| | Status |

| Search Model | Available Variables |
|---|---|
| **LIO Profile** | Associated Formulation: Name and Number |
| | Associated Output: Name and Number |
| | Created |
| | Last Edit |
| | Nutrient Profile: Name and Number |
| | Originator |

## NPD

| Search Model | Available Variables |
|---|---|
| **Innovation/Sales Pipeline** | Administrators |
| | Internal Project # |
| | Request Date |
| | Status |

| Search Model | Available Variables |
|---|---|
| **Project** | Brands |
| | Channels |
| | Consumer Value Perception |
| | Demographics |
| | Enabling Technology |
| | Gate Keeper(s) |
| | Global Categories |
| | Internal Project # |
| | Lead Countries |
| | Origination Date |
| | Priority |
| | Project Owner |
| | Project Type |
| | Readers (groups) |
| | Readers (users) |
| | Risk |
| | Stage |
| | Status |
| | Strategic Brief |
| | Team Leader(s) |
| | Team Member(s) |

| Search Model | Available Variables |
|---|---|
| **Strategic Brief** | Brands |
| | Channels |
| | Gate Keeper(s) |
| | Global Categories |
| | Key Sponsor(s) |
| | Lead Countries |
| | Origination Date |
| | Status |
| | Team Member(s) |

## NSM

| Search Model | Available Variables |
|---|---|
| **Nutrient Analysis** | Creator |
| | Date of Analysis |
| | Date of Last Update |
| | Date Received from Lab |
| | Date Sent to Lab |
| | GTIN/UPC |
| | Sample Type |
| | Source Facility |
| | Specification |

| Search Model | Available Variables |
|---|---|
| **Nutrient Composite** | Date of Composite |
| | Date of Last Update |
| | Originator |
| | Specification |

## PQM

| Search Model | Available Variables |
|---|---|
| **Action** | Action Action Type |
| | Affected Items (By Equivalent) |
| | Affected Items (By Rev) |
| | Affected Items (Rev. Indep.) |
| | Associated Project |
| | Company |
| | Customer |
| | Facility |
| | Last Edit |
| | Origination Date |
| | Originator |
| | Product Lines |
| | Related Actions |
| | Related Audits |
| | Related Issues |
| | Status |
| | Workflow |

| Search Model | Available Variables |
|---|---|
| **Audit** | Actual Audit Date |
| | Affected Items (By Equivalent) |
| | Affected Items (By Rev) |
| | Affected Items (Rev. Indep.) |
| | Audit Result |
| | Audit Type |
| | Company |
| | Customer |
| | Facility |
| | Last Edit |
| | Origination Date |
| | Originator |
| | Planned Audit Date |
| | Product Lines |
| | Related Actions |
| | Related Issues |
| | Status |
| | Workflow |

| Search Model | Available Variables |
|---|---|
| **Issue** | Affected Items (By Equivalent) |
| | Affected Items (By Rev) |
| | Affected Items (Rev. Indep.) |
| | Company |
| | Customer |
| | Expected Resolution Date |
| | Facility |
| | Issue Type |
| | Last Edit |
| | Occurrence Date |
| | Origination Date |
| | Originator |
| | Product Lines |
| | Related Actions |
| | Related Audits |
| | Resolution |
| | Severity |
| | Status |
| | Workflow |

## PQS

| Search Model | Available Variables |
|---|---|
| **Lot Sample** | Date Created |
| | Date Received |
| | GTIN/UPC/EAN |
| | Internal Alias |
| | Location |
| | Receiving Facility |
| | Sample Production Date |
| | Scheduled Evaluation Date |
| | Source Facility |
| | Source Facility (country) |
| | Spec Name |
| | Spec # |

| Search Model | Available Variables |
|---|---|
| **Scorecard** | Date of Scoring |
| | Originator |
| | Sample Details |
| | Sample # |
| | Scored By |
| | Spec Name |

| Search Model | Available Variables |
|---|---|
| **Session** | Evaluation Date |
| | Location |
| | Sample Details |
| | Session Leader |
| | Users |

## SCRM

| Search Model | Available Variables |
|---|---|
| **Company** | Alt. Supply Capability |
| | City Name |
| | Country |
| | Postal Code |
| | Sourcing (select spec) |
| | Sourcing (spec number) |

| Search Model | Available Variables |
|---|---|
| **Facility** | City Name |
| | Company |
| | Company Name |
| | Country |
| | Postal Code |
| | SAC Supplier Item # |
| | Sourcing (select spec) |
| | Sourcing (spec number) |

| Search Model | Available Variables |
|---|---|
| **Contact** | Associated Company |
| | Associated Facility |
| | Company Name |
| | Country |
| | Last SP Login Date |
| | Last Updated |

| Search Model | Available Variables |
|---|---|
| **Non Spec Sourcing Approval** | Class |
| | Company |
| | QA Assigned |
| | SC Assigned |
| | Sourcing Facility |
| | Sourcing Type |
| | Status |

| Search Model | Available Variables |
|---|---|
| **Spec-Related Sourcing Approval** | Class |
| | Company |
| | Protocol |
| | QA Assigned |
| | Receiving Facility |
| | SC Assigned |
| | Sourcing Facility |
| | Sourcing Type |
| | Specification |
| | Specification Taxonomy |
| | Status |

| Search Model | Available Variables |
|---|---|
| **Company/Facility SDM** | Company |
| | Document Type |

| | |
|---|---|
| | Due/Renewal Date |
| | Effective Date |
| | Expiration Date |
| | Facility |
| | Originator |
| | Status |

| Search Model | Available Variables |
|---|---|
| **Non-Spec Sourcing Approval SDM** | Company |
| | Document Type |
| | Due/Renewal Date |
| | Effective Date |
| | Expiration Date |
| | Facility |
| | Originator |
| | Status |

| Search Model | Available Variables |
|---|---|
| **Spec Sourcing Approval SDM** | Company |
| | Document Type |
| | Due/Renewal Date |
| | Effective Date |
| | Expiration Date |
| | Facility |
| | Originator |
| | Sourcing (select spec) |
| | Sourcing (spec number) |
| | Sourcing (taxonomy) |
| | Status |

## UGM

| Search Model | Available Variables |
|---|---|
| **Group** | Last Updated |

| Search Model | Available Variables |
|---|---|
| **User** | Country |
| | Facility |
| | Last Updated |
| | User Name |

# B

# Ready Reports Models

This appendix details the fields that can be displayed in the search results grid used for ready reports. It is sorted by application and business object.

## ADMN

## Custom Section

### View: ExtendedSectionAttributeTemplateView

### Model: Custom Sections

| Data Field | Data Field Caption | Notes |
|---|---|---|
| CategoryTabDisplay | lblCategoryTab | |
| ColumnName | lblColumnName | isAggregatable="true" |
| CreatedDate | lblCreated | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| ExtendedAttributeStatus | lblStatus | |
| ExtendedAttributeTemplateName | lblSectionName | |
| ID | lblSectionID | |
| LastEditDate | lblLastEdited | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$1020" |
| RowName | lblRowName | isAggregatable="true" |
| SecurityClassDisplay | lblSecurityClassification | |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |

## Extended Attribute

### View: ExtendedAttributeView

### Model: Extended Attributes

| Data Field | Data Field Caption | Notes |
|---|---|---|
| CategoryTabDisplay | lblCategoryTab | |
| ExtAttrTypeDisplayValue | lblAttributeType | |
| ExtendedAttributeGroup | lblGroup | |
| ExtendedAttributeID | lblExtendedAttributeTypeID | |
| ExtendedAttributeName | lblAttributeName | |
| ExtendedAttributeStatus | lblAttributeStatus | |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$2281" |
| SegmentName | lblSegmentNameProperty | sAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |

# Component Catalog

## Component Catalog Term

### View: FICTermView

### Model: Component Catalog Items

| Data Field | Data Field Caption | Notes |
|---|---|---|
| CreateByUserName | lblCreatedBy | |
| FICTermAliasPKID2 | lblTermOrAlias | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.FICTermAliasDataColumnTransformerFactory,EQTService" |
| FICTermNumber | lblTermNumber | |
| FICTermID | lblTermID | |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$6900" |

| | | |
|---|---|---|
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |
| StatusName | lblStatus | |

# DRL

## DRL Document

### View: DocumentSearchView

### Model: DRL Documents

| Data Field | Data Field Caption | Notes |
|---|---|---|
| AttachmentTitleDisplay | lblAttachmentTitle | isAggregatable="true" |
| BusinessUnit | lblBusinessUnit | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.BusinessUnitDataColumnTransformerFactory,EQTService" isAggregatable="true" aggregationDelimiter=", " |
| ClassificationDisplay | lblExactMatchClassification | isAggregatable="true" |
| DocumentDate | lblDocumentDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateFormatValueDelegateFactory,EQTService" |
| DocumentNumberIssue | lblDocumentID | |
| EffectiveDate | lblEffectiveDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateFormatValueDelegateFactory,EQTService" |
| ExpirationDate | lblExpirationDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateFormatValueDelegateFactory,EQTService" |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$7502" |
| Originator | lblOriginator | |
| StatusName | lblStatus | |
| Title | lblDocumentTitle | |
| VisibilityDisplay | lblExactMatchVisibility | isAggregatable="true" |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |

# EQ

## Material EQ Request

### View: EQMaterialRequestView

### Model: Material eQuestionnaires

| Data Field | Data Field Caption | Notes |
|---|---|---|
| AddlAdminGroupsDisplay | lblAddlAdminGroups | isAggregatable="true" dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.Transformers.CurrentWorkflowGroupDataColumnTransformerFactory,ReadyReportsLib" |
| AddlAdminUsersDisplay | llblAddlAdminUsers | isAggregatable="true" dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| eQImportedIntoGSMDisplay | lblEQImportedIntoGSM | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.EQImportIntoGSMDataColumnTransformerFactory,eQWebUI" |
| ImportMaterialSpecDisplay | lblImportSpec | dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.SpecNameDataColumnTransformerFactory,ReadyReportsLib" |
| IsSupplierInitiatedDisplay | lblSupplierInitiated | |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$1004EQ" |
| QuestionnaireApprovedUseOwner | lblPrimaryOwner | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| QuestionnaireCompany | lblEQCompany | |
| QuestionnaireDateReceived | lblEQDateRcvd | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateFormatValueDelegateFactory,EQTService" |
| QuestionnaireDateSent | lblEQDateSent | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateFormatValueDelegateFactory,EQTService" |
| QuestionnaireDueDate | lblEQDueDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateFormatValueDelegateFactory,EQTService" |
| QuestionnaireEmail | lblEQEmail | |
| QuestionnaireNumber | lblEQNumber | |
| QuestionnaireStatusDisplay | lblEQStatus | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.EQStatusDataColumnTransformerFactory,eQWebUI" |
| QuestionnaireTitle | lblEQTitle | |

| | | |
|---|---|---|
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |

## Packaging EQ Request

### View: EQPackagingRequestView

### Model: Packaging eQuestionnaires

| Data Field | Data Field Caption | Notes |
|---|---|---|
| AddlAdminGroupsDisplay | lblAddlAdminGroups | isAggregatable="true" dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.Transformers.CurrentWorkflowGroupDataColumnTransformerFactory,ReadyReportsLib" |
| AddlAdminUsersDisplay | lblAddlAdminUsers | isAggregatable="true" dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| eQImportedIntoGSMDisplay | lblEQImportedIntoGSM | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.EQImportIntoGSMDataColumnTransformerFactory,eQWebUI" |
| ImportPackagingSpecDisplay | lblImportSpec | dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.SpecNameDataColumnTransformerFactory,ReadyReportsLib" |
| IsSupplierInitiatedDisplay | lblSupplierInitiated | |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$1009EQ" |
| QuestionnaireApprovedUseOwner | lblPrimaryOwner | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| QuestionnaireCompany | lblEQCompany | |
| QuestionnaireDateReceived | lblEQDateRcvd | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateFormatValueDelegateFactory,EQTService" |
| QuestionnaireDateSent | lblEQDateSent | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateFormatValueDelegateFactory,EQTService" |
| QuestionnaireDueDate | lblEQDueDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateFormatValueDelegateFactory,EQTService" |
| QuestionnaireEmail | lblEQEmail | |
| QuestionnaireNumber | lblEQNumber | |
| QuestionnaireStatusDisplay | lblEQStatus | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.EQStatusDataColumnTransformerFactory,eQWebUI" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| QuestionnaireTitle | lblEQTitle | |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |

## Printed Packaging EQ Request

### View: EQPrintedPackagingRequestView

### Model: Printed Packaging eQuestionnaires

| Data Field | Data Field Caption | Notes |
|---|---|---|
| AddlAdminGroupsDisplay | lblAddlAdminGroups | isAggregatable="true" dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.Transformers.CurrentWorkflowGroupDataColumnTransformerFactory,ReadyReportsLib" |
| AddlAdminUsersDisplay | lblAddlAdminUsers | isAggregatable="true" dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| eQImportedIntoGSMDisplay | lblEQImportedIntoGSM | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.EQImportIntoGSMDataColumnTransformerFactory,eQWebUI" |
| ImportPrintedPackagingSpecDisplay | lblImportSpec | dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.SpecNameDataColumnTransformerFactory,ReadyReportsLib" |
| IsSupplierInitiatedDisplay | lblSupplierInitiated | |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$2121EQ" |
| QuestionnaireApprovedUseOwner | lblPrimaryOwner | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| QuestionnaireCompany | lblEQCompany | |
| QuestionnaireDateReceived | lblEQDateRcvd | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateFormatValueDelegateFactory,EQTService" |
| QuestionnaireDateSent | lblEQDateSent | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateFormatValueDelegateFactory,EQTService" |
| QuestionnaireDueDate | lblEQDueDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateFormatValueDelegateFactory,EQTService" |
| QuestionnaireEmail | lblEQEmail | |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| QuestionnaireNumber | lblEQNumber | |
| QuestionnaireStatusDisplay | lblEQStatus | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.EQStatusDataColumnTransformerFactory,eQWebUI" |
| QuestionnaireTitle | lblEQTitle | |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |

## Product EQ Request

### View: EQProductRequestView

### Model: Product eQuestionnaires

| Data Field | Data Field Caption | Notes |
|---|---|---|
| AddlAdminGroupsDisplay | lblAddlAdminGroups | isAggregatable="true" dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.Transformers.CurrentWorkflowGroupDataColumnTransformerFactory,ReadyReportsLib" |
| AddlAdminUsersDisplay | lblAddlAdminUsers | isAggregatable="true" dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| eQImportedIntoGSMDisplay | lblEQImportedIntoGSM | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.EQImportIntoGSMDataColumnTransformerFactory,eQWebUI" |
| ImportProductSpec | lblImportSpec | dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.SpecNameDataColumnTransformerFactory,ReadyReportsLib" |
| IsSupplierInitiatedDisplay | lblSupplierInitiated | |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$6501EQ" |
| QuestionnaireApprovedUseOwner | lblPrimaryOwner | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| QuestionnaireCompany | lblEQCompany | |
| QuestionnaireDateReceived | lblEQDateRcvd | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateFormatValueDelegateFactory,EQTService" |
| QuestionnaireDateSent | lblEQDateSent | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateFormatValueDelegateFactory,EQTService" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| QuestionnaireDueDate | lblEQDueDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateFormatValueDelegateFactory,EQTService" |
| QuestionnaireEmail | lblEQEmail | |
| QuestionnaireNumber | lblEQNumber | |
| QuestionnaireStatusDisplay | lblEQStatus | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.EQStatusDataColumnTransformerFactory,eQWebUI" |
| QuestionnaireTitle | lblEQTitle | |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |

## Trade EQ Request

### View: EQTradeRequestView

### Model: Trade eQuestionnaires

| Data Field | Data Field Caption | Notes |
|---|---|---|
| AddlAdminGroupsDisplay | lblAddlAdminGroups | isAggregatable="true" dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.Transformers.CurrentWorkflowGroupDataColumnTransformerFactory,ReadyReportsLib" |
| AddlAdminUsersDisplay | lblAddlAdminGroups | isAggregatable="true" dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| eQImportedIntoGSMDisplay | lblEQImportedIntoGSM | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.EQImportIntoGSMDataColumnTransformerFactory,eQWebUI" |
| ImportTradeSpecDisplay | lblImportSpec | dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.SpecNameDataColumnTransformerFactory,ReadyReportsLib" |
| IsSupplierInitiatedDisplay | lblSupplierInitiated | |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$2147EQ" |
| QuestionnaireApprovedUseOwner | lblPrimaryOwner | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| QuestionnaireCompany | lblEQCompany | |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| QuestionnaireDateReceived | lblEQDateRcvd | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateFormatValueDelegateFactory,EQTService" |
| QuestionnaireDateSent | lblEQDateSent | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateFormatValueDelegateFactory,EQTService" |
| QuestionnaireDueDate | lblEQDueDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateFormatValueDelegateFactory,EQTService" |
| QuestionnaireEmail | lblEQEmail | |
| QuestionnaireNumber | lblEQNumber | |
| QuestionnaireStatusDisplay | lblEQStatus | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.EQStatusDataColumnTransformerFactory,eQWebUI" |
| QuestionnaireTitle | lblEQTitle | |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |

# GSM

## Delivered Material Packing Specification

### View: SpecSummaryView

### Model: Delivered Material Packing Specifications

| Data Field | Data Field Caption | Notes |
|---|---|---|
| ApprovedForUseBUDisplayName | lblBusinessUnit | isAggregatable="true" dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.BusinessUnitDataColumnTransformerFactory,EQTService" |
| AssociatedSpecAssocDisplay | lblAssociatedSpecAssociation | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$1010\|display" |
| AssociatedSpecERPIDDisplayName | lblAssociatedSpecERPID | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$1010\|display" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| AssociatedSpecNameDisplay | lblAssociatedSpecName | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$1010 \| display" |
| AssociatedSpecNumberDisplay | lblAssociatedSpecNumber | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$1010 \| display" |
| ConceptDisplay | lblConcept | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.TaxonomyAliasDataColumnTransformerFactory,EQTService$FoodserviceConcept" isAggregatable="true" |
| CountriesWhereUsedDisplayName | lblCountriesWhereUsed | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.CountryDataColumnTransformerFactory,EQTService" isAggregatable="true" |
| Created | lblCreated | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| CurrentStatus | llblSpecSummaryStatus | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.WorkflowStatusDataColumnTransformerFactory,EQTService" |
| CurrentWorkflowGroup | lblCurrentWorkFlowGroup | dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.Transformers.CurrentWorkflowGroupDataColumnTransformerFactory,ReadyReportsLib" isAggregatable="true" |
| CurrentWorkflowOwner | lblCurrentWorkFlowOwner | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" isAggregatable="true" |
| Description | lblDescription | |
| Effective | lblSpecSummaryEffective | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| Inactive | lblSpecSummaryInactive | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| LastEdit | lblLastEdited | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$1010" |
| Originator | lblOriginator | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| RichTextDocKeywordsDisplay | lblRichTextDocKeywords | isAggregatable="true" |
| SDMAttachmentDisplay | lblAttachmentName | isAggregatable="true" |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |
| ShortName | lblSpecShortName | |
| SpecName | lblSpecName | |
| SpecNumber | lblSpecNumber | |
| SupercedesLangAware | lblSupercedes | |
| Taxonomy | lblTaxonomy | |
| Thumbnail | lblThumbnail | enableHandler="Class:Xeno.Web.UI.Common.Controls.Thumbnail.EQTEnableHandler,WebCommon$1010" dataFormatter="Singleton:Xeno.Web.UI.Common.Controls.Thumbnail.EQTDataFormatter,WebCommon" hideHeader="true" disableExport="true" sortingEnabled="false" |
| WorkflowName | lblWorkflow | |

## Equipment Specification

### View: SpecSummaryView

### Model: Equipment Specifications

| Data Field | Data Field Caption | Notes |
|---|---|---|
| ApprovedForUseBUDisplayName | lblBusinessUnit | isAggregatable="true" dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.BusinessUnitDataColumnTransformerFactory,EQTService" |
| AssociatedSpecAssocDisplay | lblAssociatedSpecAssociation | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$2280 \| display" |
| AssociatedSpecERPIDDisplayName | lblAssociatedSpecERPID | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$2280 \| display" |
| AssociatedSpecNameDisplay | lblAssociatedSpecName | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$2280 \| display" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| AssociatedSpecNumberDisplay | lblAssociatedSpecNumber | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$2280 \| display" |
| ConceptDisplay | lblConcept | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.TaxonomyAliasDataColumnTransformerFactory,EQTService$FoodserviceConcept" isAggregatable="true" |
| CountriesWhereUsedDisplayName | lblCountriesWhereUsed | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.CountryDataColumnTransformerFactory,EQTService" isAggregatable="true" |
| Created | lblCreated | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| ctxSysEquiv | lblPreferredEquivalent | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.GSMContextSensitiveEquivalentDataTransormerFactory,PlatformExtensions" enableHandler="Class:Xeno.Prodika.EQTService.SearchablePropertyHandlers.FeaturePropertyItemEnabledResolverFactory,EQTService$GSM.EQT.CrossReferences.Enabled" |
| CurrentStatus | lblSpecSummaryStatus | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.WorkflowStatusDataColumnTransformerFactory,EQTService" |
| CurrentWorkflowGroup | lblCurrentWorkFlowGroup | dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.Transformers.CurrentWorkflowGroupDataColumnTransformerFactory,ReadyReportsLib" isAggregatable="true" |
| CurrentWorkflowOwner | lblCurrentWorkFlowOwner | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" isAggregatable="true" |
| Effective | lblSpecSummaryEffective | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| ERPSystemNameAndID | lblERPSystemNameAndID | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.LegacySystemEquivalentDataColumnTransformerFactory,EQTService" isAggregatable="true" |
| Inactive | lblSpecSummaryInactive | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| LastEdit | lblLastEdited | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$2280" |
| Originator | lblOriginator | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| RichTextDocKeywordsDisplay | lblRichTextDocKeywords | isAggregatable="true" |
| SDMAttachmentDisplay | lblAttachmentName | isAggregatable="true" |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |
| ShortName | lblSpecShortName | |
| SpecName | lblSpecName | |
| SpecNumber | lblSpecNumber | |
| SupercedesLangAware | lblSupercedes | |
| SystemNameDisplayName | lblSystemName | isAggregatable="true" |
| SystemEquivalentDisplay | lblSysEquivCtlEquivalent | isAggregatable="true" |
| Taxonomy | lblTaxonomy | |
| Thumbnail | lblThumbnail | enableHandler="Class:Xeno.Web.UI.Common.Controls.Thumbnail.EQTEnableHandler,WebCommon$2280" dataFormatter="Singleton:Xeno.Web.UI.Common.Controls.Thumbnail.EQTDataFormatter,WebCommon" hideHeader="true" disableExport="true" sortingEnabled="false" |
| WorkflowName | lblWorkflow | |

## Formulation Specification

### View: SpecSummaryView

### Model: Formulation Specifications

| Data Field | Data Field Caption | Notes |
|---|---|---|
| ApprovedForUseBUDisplayName | lblBusinessUnit | isAggregatable="true" dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.BusinessUnitDataColumnTransformerFactory,EQTService" |
| AssociatedSpecAssocDisplay | llblAssociatedSpecAssociation | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$5816\|display" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| AssociatedSpecERPIDDisplayName | lblAssociatedSpecERPID | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$5816 \| display" |
| AssociatedSpecNameDisplay | lblAssociatedSpecName | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$5816 \| display" |
| AssociatedSpecNumberDisplay | lblAssociatedSpecNumber | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$5816 \| display" |
| BOMItemAnnotationDisplay | lblBOMItemAnnotation | isAggregatable="true" |
| ConceptDisplay | lblConcept | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.TaxonomyAliasDataColumnTransformerFactory,EQTService$FoodserviceConcept" isAggregatable="true" |
| CountriesWhereUsedDisplayName | lblCountriesWhereUsed | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.CountryDataColumnTransformerFactory,EQTService" isAggregatable="true" |
| Created | lblCreated | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| ctxSysEquiv | lblPreferredEquivalent | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.GSMContextSensitiveEquivalentDataTransormerFactory,PlatformExtensions" enableHandler="Class:Xeno.Prodika.EQTService.SearchablePropertyHandlers.FeaturePropertyItemEnabledResolverFactory,EQTService$GSM.EQT.CrossReferences.Enabled" |
| CurrentStatus | lblSpecSummaryStatus | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.WorkflowStatusDataColumnTransformerFactory,EQTService" |
| CurrentWorkflowGroup | lblCurrentWorkFlowGroup | dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.Transformers.CurrentWorkflowGroupDataColumnTransformerFactory,ReadyReportsLib" isAggregatable="true" |
| CurrentWorkflowOwner | lblCurrentWorkFlowOwner | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" isAggregatable="true" |
| Description | lblDescription | |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| Effective | lblSpecSummaryEffective | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| FacilityDisplayName | lblFacility | dataTransformer="Singleton:EQTModels.BusinessUnitSecurity.BUSecuredFacilityNameDataColumnTransformerFactory,EQTModels" |
| FormulationType | lblFormulationType | |
| Inactive | lblSpecSummaryInactive | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| LastEdit | lblLastEdited | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$5816" |
| NPDProjectNameDisplay | lblNPDProjectName | |
| Originator | lblOriginator | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| RichTextDocKeywordsDisplay | lblRichTextDocKeywords | isAggregatable="true" |
| SDMAttachmentDisplay | lblAttachmentName | isAggregatable="true" |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |
| ShortName | lblSpecShortName | |
| SpecName | lblSpecName | |
| SpecNumber | lblSpecNumber | |
| StepInstrKeywordsDisplay | lblStepInstructionsKeywords | isAggregatable="true" |
| StepName | lblStepName | isAggregatable="true" |
| SupercedesLangAware | lblSupercedes | |
| SystemEquivalentDisplay | lblSysEquivCtlEquivalent | isAggregatable="true" |
| SystemNameDisplayName | lblSystemName | isAggregatable="true" |
| Taxonomy | lblTaxonomy | |
| Thumbnail | lblThumbnail | enableHandler="Class:Xeno.Web.UI.Common.Controls.Thumbnail.EQTEnableHandler,WebCommon$5816" dataFormatter="Singleton:Xeno.Web.UI.Common.Controls.Thumbnail.EQTDataFormatter,WebCommon" hideHeader="true" disableExport="true" sortingEnabled="false" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| WorkflowName | lblWorkflow | |

## Global Succession Request

### View: SuccessionRequestView

### Model: Global Succession Requests

| Data Field | Data Field Caption | Notes |
|---|---|---|
| CreatedDate | lblCreated | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| CreatorName | lblCreatedBy | |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$5806" |
| NewSpecificationName | lblNewSpecName | |
| NewSpecificationNumber | lblNewSpecNumber | |
| ParentSpecType | lblParentType | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.DataObjectNameFormatValueDelegateFactory,EQTService" |
| RequestNumber | lblRequestNumber | |
| SpecToSupersedeSpecName | lblSupersedeSpecName | |
| SpecToSupersedeSpecNumber | lblSupersedeSpecNumber | |
| SuccessionSpecType | lblSuccessionType | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.DataObjectNameFormatValueDelegateFactory,EQTService" |

## GSM Activity

### View: SpecSummaryView

### Model: GSM Activities

| Data Field | Data Field Caption | Notes |
|---|---|---|
| ActPrimarySpecNameDisplay | lblActivityPrimarySpecName | |
| ActPrimarySpecNumberDisplay | lblActivityPrimarySpecNumber | |
| ActRelatedSpecNameDisplay | lblActivityRelatedSpecName | isAggregatable="true" |
| ActRelatedSpecNumberDisplay | lblActivityRelatedSpecNumber | isAggregatable="true" |
| ActivityWorkflowName | lblActivityType | |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| ApprovedForUseBUDisplayName | lblBusinessUnit | isAggregatable="true" dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.BusinessUnitDataColumnTransformerFactory,EQTService" |
| ConceptDisplay | lblConcept | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.TaxonomyAliasDataColumnTransformerFactory,EQTService$FoodserviceConcept" isAggregatable="true" |
| CountriesWhereUsedDisplayName | lblCountriesWhereUsed | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.CountryDataColumnTransformerFactory,EQTService" isAggregatable="true" |
| CurrentStatus | lblSpecSummaryStatus | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.WorkflowStatusDataColumnTransformerFactory,EQTService" |
| CurrentWorkflowGroup | lblCurrentWorkFlowGroup | dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.Transformers.CurrentWorkflowGroupDataColumnTransformerFactory,ReadyReportsLib" isAggregatable="true" |
| CurrentWorkflowOwner | lblCurrentWorkFlowOwner | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" isAggregatable="true" |
| Effective | lblSpecSummaryEffective | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| Inactive | lblSpecSummaryInactive | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| LastEdit | lblLastEdited | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$2283" |
| OriginatorName | lblSpecSummaryOriginator | |
| RichTextDocKeywordsDisplay | lblRichTextDocKeywords | isAggregatable="true" |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |
| SpecialNotes | lblActivitySpecialNotes | |
| SpecName | lblSpecName | |
| SpecNumber | lblSpecNumber | |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| SystemEquivalentDisplay | llblSysEquivCtlEquivalent | isAggregatable="true" |
| Thumbnail | lblThumbnail | enableHandler="Class:Xeno.Web.UI.Common.Controls.Thumbnail.EQTEnableHandler,WebCommon$2283" dataFormatter="Singleton:Xeno.Web.UI.Common.Controls.Thumbnail.EQTDataFormatter,WebCommon" hideHeader="true" disableExport="true" sortingEnabled="false" |
| WorkflowName | lblWorkflow | |

## Labeling Specification

### View: SpecSummaryView

### Model: Labeling Specifications

| Data Field | Data Field Caption | Notes |
|---|---|---|
| ApprovedForUseBUDisplayName | lblBusinessUnit | isAggregatable="true" dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.BusinessUnitDataColumnTransformerFactory,EQTService" |
| AssociatedSpecAssocDisplay | lblAssociatedSpecAssociation | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$1006 \| display" |
| AssociatedSpecERPIDDisplayName | lblAssociatedSpecERPID | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$1006 \| display" |
| AssociatedSpecNameDisplay | lblAssociatedSpecName | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$1006 \| display" |
| AssociatedSpecNumberDisplay | lblAssociatedSpecNumber | sAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$1006 \| display" |
| ConceptDisplay | lblConcept | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.TaxonomyAliasDataColumnTransformerFactory,EQTService$FoodserviceConcept" isAggregatable="true" |
| CountriesWhereUsedDisplayName | lblCountriesWhereUsed | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.CountryDataColumnTransformerFactory,EQTService" isAggregatable="true" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| Created | lblCreated | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| CurrentStatus | lblSpecSummaryStatus | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.WorkflowStatusDataColumnTransformerFactory,EQTService" |
| CurrentWorkflowGroup | lblCurrentWorkFlowGroup | dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.Transformers.CurrentWorkflowGroupDataColumnTransformerFactory,ReadyReportsLib" isAggregatable="true" |
| CurrentWorkflowOwner | lblCurrentWorkFlowOwner | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" isAggregatable="true" |
| Description | lblDescription | |
| Effective | lblSpecSummaryEffective | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| Inactive | lblSpecSummaryInactive | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| LastEdit | lblLastEdited | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$1006" |
| Originator | lblOriginator | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| RichTextDocKeywordsDisplay | lblRichTextDocKeywords | isAggregatable="true" |
| SDMAttachmentDisplay | lblAttachmentName | isAggregatable="true" |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |
| ShortName | lblSpecShortName | |
| SpecName | lblSpecName | |
| SpecNumber | lblSpecNumber | |
| SystemNameDisplayName | lblSystemName | isAggregatable="true" |
| SupercedesLangAware | lblSupercedes | |
| Taxonomy | lblTaxonomy | |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| Thumbnail | lblThumbnail | enableHandler="Class:Xeno.Web.UI.Common.Controls.Thumbnail.EQTEnableHandler,WebCommon$1006" dataFormatter="Singleton:Xeno.Web.UI.Common.Controls.Thumbnail.EQTDataFormatter,WebCommon" hideHeader="true" disableExport="true" sortingEnabled="false" |
| WorkflowName | lblWorkflow | |

## LIO Profile

### View: SpecSummaryView

### Model: LIO Profiles

| Data Field | Data Field Caption | Notes |
|---|---|---|
| AssociatedFormulationEquiv | lblAssocFormulationEquivalent | isAggregatable="true" |
| AssociatedFormulationName | lblAssocFormulationName | |
| AssociatedFormulationNumber | lblAssocFormulationNum | |
| AssociatedNPName | lblAssocNPName | |
| AssociatedNPNumber | lblAssocNPNum | |
| AssociatedOutputEquiv | lblAssocOutputEquivalent | isAggregatable="true" |
| AssociatedOutputName | lblAssocOutputName | |
| AssociatedOutputNumber | lblAssocOutputNum | |
| Description | lblDescription | |
| LastSavedDate | lblLastEdited | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| LIONumber | lblProfileNumber | |
| LIOProfileCreatedDate | lblCreated | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$5506" |
| Originator | lblOriginator | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| ProfileName | lblProfileName | |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |
| StatusName | lblStatus | |

## Master Specification

### View: SpecSummaryView

### Model: Master Specifications

| Data Field | Data Field Caption | Notes |
|---|---|---|
| ApprovedForUseBUDisplayName | lblBusinessUnit | isAggregatable="true" dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.BusinessUnitDataColumnTransformerFactory,EQTService" |
| AssociatedSpecAssocDisplay | lblAssociatedSpecAssociation | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$1005 \| display" |
| AssociatedSpecERPIDDisplayName | lblAssociatedSpecERPID | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$1005 \| display" |
| AssociatedSpecNameDisplay | lblAssociatedSpecName | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$1005 \| display" |
| AssociatedSpecNumberDisplay | lblAssociatedSpecNumber | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$1005 \| display" |
| ConceptDisplay | lblConcept | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.TaxonomyAliasDataColumnTransformerFactory,EQTService$FoodserviceConcept" isAggregatable="true" |
| CountriesWhereUsedDisplayName | lblCountriesWhereUsed | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.CountryDataColumnTransformerFactory,EQTService" isAggregatable="true" |
| Created | lblCreated | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| CurrentStatus | lblSpecStatus | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.WorkflowStatusDataColumnTransformerFactory,EQTService" |
| CurrentWorkflowGroup | lblCurrentWorkFlowGroup | dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.Transformers.CurrentWorkflowGroupDataColumnTransformerFactory,ReadyReportsLib" isAggregatable="true" |
| CurrentWorkflowOwner | lblCurrentWorkFlowOwner | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" isAggregatable="true" |
| Description | lblDescription | |
| Effective | lblSpecSummaryEffective | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| Inactive | lblSpecSummaryInactive | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| LastEdit | lblLastEdited | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$1005" |
| Originator | lblOriginator | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| RichTextDocKeywordsDisplay | lblRichTextDocKeywords | isAggregatable="true" |
| SDMAttachmentDisplay | lblAttachmentName | isAggregatable="true" |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |
| ShortName | lblSpecShortName | |
| SpecName | lblSpecName | |
| SpecNumber | lblSpecNumber | |
| SupercedesLangAware | lblSupercedes | |
| Taxonomy | lblTaxonomy | |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| Thumbnail | lblThumbnail | enableHandler="Class:Xeno.Web.UI.Common.Controls.Thumbnail.EQTEnableHandler,WebCommon$1005" dataFormatter="Singleton:Xeno.Web.UI.Common.Controls.Thumbnail.EQTDataFormatter,WebCommon" hideHeader="true" disableExport="true" sortingEnabled="false" |
| WorkflowName | lblWorkflow | |

## Material Specification

### View: SpecSummaryView

### Model: Material Specifications

| Data Field | Data Field Caption | Notes |
|---|---|---|
| AdditivesContainedDisplay | lblctlComplianceAdditives | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Additives" |
| AdditivesNotContDisplay | lblComplianceAdditivesNotContained | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Additives" |
| AdditivesMayContDisplay | lblComplianceAdditivesMayContain | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Additives" |
| AllergensContainedDisplay | lblctlComplianceAllergens | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Allergens" |
| AllergensNotContDisplay | lblComplianceAllergensNotContained | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Allergens" |
| AllergensMayContDisplay | lblComplianceAllergensMayContain | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Allergens" |
| ApprovedForUseBUDisplayName | lblBusinessUnit | isAggregatable="true" dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.BusinessUnitDataColumnTransformerFactory,EQTService" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| AssociatedSpecAssocDisplay | lblAssociatedSpecAssociation | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$1004 \| display" |
| AssociatedSpecERPIDDisplayName | lblAssociatedSpecERPID | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$1004 \| display" |
| AssociatedSpecNameDisplay | lblAssociatedSpecName | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$1004 \| display" |
| AssociatedSpecNumberDisplay | lblAssociatedSpecNumber | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$1004 \| display" |
| ClassificationDisplayName | lblClassification | isAggregatable="true" |
| CombinedIngredientStatement | lblIngredientStateCtlCombinedState | |
| CompliesWithDisplay | lblctlComplianceCompliesWith | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$CompliesWith" |
| ConceptDisplay | lblConcept | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.TaxonomyAliasDataColumnTransformerFactory,EQTService$FoodserviceConcept" isAggregatable="true" |
| CountriesWhereUsedDisplayName | lblCountriesWhereUsed | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.CountryDataColumnTransformerFactory,EQTService" isAggregatable="true" |
| CountryOfOriginDisplay | lblCountryOfOrigin | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.CountryDataColumnTransformerFactory,EQTService" |
| Created | lblCreated | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| ctxSysEquiv | lblPreferredEquivalent | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.GSMContextSensitiveEquivalentDataTransormerFactory,PlatformExtensions" enableHandler="Class:Xeno.Prodika.EQTService.SearchablePropertyHandlers.FeaturePropertyItemEnabledResolverFactory,EQTService$GSM.EQT.CrossReferences.Enabled" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| CurrentStatus | lblSpecSummaryStatus | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.WorkflowStatusDataColumnTransformerFactory,EQTService" |
| CurrentWorkflowGroup | lblCurrentWorkFlowGroup | dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.Transformers.CurrentWorkflowGroupDataColumnTransformerFactory,ReadyReportsLib" isAggregatable="true" |
| CurrentWorkflowOwner | lblCurrentWorkFlowOwner | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" isAggregatable="true" |
| Description | lblDescription | |
| Effective | lblSpecSummaryEffective | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| Inactive | lblSpecSummaryInactive | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| IngredientStatement | lblIngredientStatement | |
| IntolerancesContainedDisplay | lblctlComplianceIntolerances | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Intolerances" |
| IntolerancesNotContDisplay | lblComplianceIntolerancesNotContained | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Intolerances" |
| IntolerancesMayContDisplay | lblComplianceIntolerancesMayContain | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Intolerances" |
| LastEdit | lblLastEdited | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| MaterialTypeExDisplay | lblType | lblType dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.MaterialTypeExDataTransformerFactory,PlatformExtensions" |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$1004" |
| Originator | lblOriginator | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| ParentFrmSpecERPIDDisplay | lblParentFormulationSpecERPID | isAggregatable="true" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| ParentFrmSpecNameDisplay | lblParentFormulationSpecName | isAggregatable="true" |
| ParentFrmSpecNumDisplay | lblParentFormulationSpecNum | isAggregatable="true" |
| RichTextDocKeywordsDisplay | lblRichTextDocKeywords | isAggregatable="true" |
| SDMAttachmentDisplay | lblAttachmentName | isAggregatable="true" |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |
| ShortName | lblSpecShortName | |
| SourcingFacilityDisplayName | lblSourceFacility | isAggregatable="true" dataTransformer="Singleton:EQTModels.BusinessUnitSecurity.BUSecuredFacilityNameDataColumnTransformerFactory,EQTModels" |
| SourcingNumberSpec | lblSourcingNumber | isAggregatable="true" |
| specCostBookValue | lblUSDPer100g | dataTransformer="Singleton:Xeno.Prodika.GSMLib.EQTDisplayColumnCellTransformers.FormulationCostBookValueDataTransformerFactory,GSMLib" |
| SpecName | lblSpecName | |
| SpecNumber | lblSpecNumber | |
| SupercedesLangAware | lblSupercedes | |
| SupplierPartNumberDisplayName | lblSupplierItemNumber | isAggregatable="true" |
| SystemNameDisplayName | lblSystemName | isAggregatable="true" |
| SystemEquivalentDisplay | lblSysEquivCtlEquivalent | isAggregatable="true" |
| Taxonomy | lblTaxonomy | |
| Thumbnail | lblThumbnail | enableHandler="Class:Xeno.Web.UI.Common.Controls.Thumbnail.EQTEnableHandler,WebCommon$1004" dataFormatter="Singleton:Xeno.Web.UI.Common.Controls.Thumbnail.EQTDataFormatter,WebCommon" hideHeader="true" disableExport="true" sortingEnabled="false" |
| TradeSpecERPIDDisplay | lblTradeSpecERPID | isAggregatable="true" |
| TradeSpecNameDisplay | lblTradeSpecName | isAggregatable="true" |
| TradeSpecNumDisplay | lblTradeSpecNum | isAggregatable="true" |
| VendorHasApprovedDisplayName | lblVendorHasApproved | dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.Transformers.VendorHasApprovedDataColumnTransformerFactory,ReadyReportsLib" isAggregatable="true" |
| WorkflowName | lblWorkflow | |

# Menu Item Specification

### View: SpecSummaryView

### Model: Menu Item Specifications

| Data Field | Data Field Caption | Notes |
|---|---|---|
| ActualClaimsDisplayName | lblActualLabelClaims | isAggregatable="true" |
| AdditivesContainedDisplay | lblctlComplianceAdditives | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Additives" |
| AdditivesNotContDisplay | lblComplianceAdditivesNotContained | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Additives" |
| AdditivesMayContDisplay | lblComplianceAdditivesMayContain | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Additives" |
| AllergensContainedDisplay | lblctlComplianceAllergens | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Allergens" |
| AllergensNotContDisplay | lblComplianceAllergensNotContained | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Allergens" |
| AllergensMayContDisplay | lblComplianceAllergensMayContain | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Allergens" |
| ApprovedForUseBUDisplayName | lblBusinessUnit | isAggregatable="true" dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.BusinessUnitDataColumnTransformerFactory,EQTService" |
| AssociatedSpecAssocDisplay | lblAssociatedSpecAssociation | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$6500\|display" |
| AssociatedSpecERPIDDisplayName | lblAssociatedSpecERPID | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$6500\|display" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| AssociatedSpecNameDisplay | lblAssociatedSpecName | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$6500 \| display" |
| AssociatedSpecNumberDisplay | lblAssociatedSpecNumber | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$6500 \| display" |
| BusinessUnit | lblBusinessUnit | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.BusinessUnitDataColumnTransformerFactory,EQTService" isAggregatable="true" |
| ConceptDisplay | lblConcept | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.TaxonomyAliasDataColumnTransformerFactory,EQTService$FoodserviceConcept" isAggregatable="true" |
| Created | lblCreated | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| ctxSysEquiv | lblPreferredEquivalent | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.GSMContextSensitiveEquivalentDataTransormerFactory,PlatformExtensions" enableHandler="Class:Xeno.Prodika.EQTService.SearchablePropertyHandlers.FeaturePropertyItemEnabledResolverFactory,EQTService$GSM.EQT.CrossReferences.Enabled" |
| CurrentStatus | llblSpecSummaryStatus | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.WorkflowStatusDataColumnTransformerFactory,EQTService" |
| CurrentWorkflowGroup | lblCurrentWorkFlowGroup | dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.Transformers.CurrentWorkflowGroupDataColumnTransformerFactory,ReadyReportsLib" isAggregatable="true" |
| CurrentWorkflowOwner | lblCurrentWorkFlowOwner | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" isAggregatable="true" |
| Effective | lblSpecSummaryEffective | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| Inactive | lblSpecSummaryInactive | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| IngredientStatement | llblIngredientStatement | |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| IntolerancesContainedDisplay | lblctlComplianceIntolerances | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Intolerances" |
| IntolerancesNotContDisplay | lblComplianceIntolerancesNotContained | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Intolerances" |
| IntolerancesMayContDisplay | lblComplianceIntolerancesMayContain | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Intolerances" |
| LastEdit | lblLastEdited | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| MenuItemClassName | lblMenuItemClass | isAggregatable="true" |
| MenuItemStandardDisplay | lblStandard | |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$6500" |
| Originator | lblOriginator | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| PotentialClaimsDisplayName | lblPotentialLabelClaims | isAggregatable="true" |
| RichTextDocKeywordsDisplay | lblRichTextDocKeywords | isAggregatable="true" |
| SDMAttachmentDisplay | lblAttachmentName | isAggregatable="true" |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |
| ShortName | lblSpecShortName | |
| CompliesWithDisplay | lblctlComplianceCompliesWith | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$CompliesWith" |
| SpecName | lblSpecName | |
| SpecNumber | lblSpecNumber | |
| SupercedesLangAware | lblSupercedes | |
| SystemEquivalentDisplay | llblSysEquivCtlEquivalent | isAggregatable="true" |
| SystemNameDisplayName | lblSystemName | isAggregatable="true" |
| Taxonomy | lblTaxonomy | |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| Thumbnail | lblThumbnail | enableHandler="Class:Xeno.Web.UI.Common.Controls.Thumbnail.EQTEnableHandler,WebCommon$6500" dataFormatter="Singleton:Xeno.Web.UI.Common.Controls.Thumbnail.EQTDataFormatter,WebCommon" hideHeader="true" disableExport="true" sortingEnabled="false" |
| WorkflowName | lblWorkflow | |

## Nutrient Profile

### View: SpecSummaryView

### Model: Nutrient Profiles

| Data Field | Data Field Caption | Notes |
|---|---|---|
| ApprovedForUseBUDisplayName | lblBusinessUnit | isAggregatable="true" dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.BusinessUnitDataColumnTransformerFactory,EQTService" |
| AssociatedSpecAssocDisplay | lblAssociatedSpecAssociation | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$5750 \| display" |
| AssociatedSpecERPIDDisplayName | lblAssociatedSpecERPID | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$5750 \| display" |
| AssociatedSpecNameDisplay | lblAssociatedSpecName | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$5750 \| display" |
| AssociatedSpecNumberDisplay | lblAssociatedSpecNumber | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$5750 \| display" |
| CaloriesDisplay | lblCaloriesPerHundredGram | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.NutrientItemPerHundredGramDataTransformerFactory,PlatformExtensions$lblCalories" |
| CaloriesPerServingDisplay | lblCaloriesPerServing | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.NutrientItemPerServingDataTransformerFactory,PlatformExtensions$lblCalories" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| CarbohydratesDisplay | lblCarbsPerHundredGram | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.NutrientItemPerHundredGramDataTransformerFactory,PlatformExtensions$lblCarbohydrates" |
| CarbsPerServingDisplay | lblCarbsPerServing | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.NutrientItemPerServingDataTransformerFactory,PlatformExtensions$lblCarbohydrates" |
| CholesterolDisplay | lblCholesterolPerHundredGram | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.NutrientItemPerHundredGramDataTransformerFactory,PlatformExtensions$lblCholesterol" |
| CholesterolPerServingDisplay | lblCholesterolPerServing | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.NutrientItemPerServingDataTransformerFactory,PlatformExtensions$lblCholesterol" |
| ConceptDisplay | lblConcept | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.TaxonomyAliasDataColumnTransformerFactory,EQTService$FoodserviceConcept" isAggregatable="true" |
| Created | lblCreated | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| CurrentStatus | lblSpecSummaryStatus | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.WorkflowStatusDataColumnTransformerFactory,EQTService" |
| CurrentWorkflowGroup | lblCurrentWorkFlowGroup | dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.Transformers.CurrentWorkflowGroupDataColumnTransformerFactory,ReadyReportsLib" isAggregatable="true" |
| CurrentWorkflowOwner | lblCurrentWorkFlowOwner | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" isAggregatable="true" |
| Effective | lblSpecSummaryEffective | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| IngredientStatement | lblIngredientStatement | |
| LastEdit | lblLastEdited | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$5750" |
| Originator | lblOriginator | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| Owner | lblOwner | |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| ParentSpecName | lblParentSpecName | isAggregatable="true" |
| ParentSpecNum | lblParentSpecNum | isAggregatable="true" |
| ProteinDisplay | lblProteinPerHundredGram | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.NutrientItemPerHundredGramDataTransformerFactory,PlatformExtensions$lblProtein" |
| ProteinPerServingDisplay | lblProteinPerServing | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.NutrientItemPerServingDataTransformerFactory,PlatformExtensions$lblProtein" |
| RichTextDocKeywordsDisplay | lblRichTextDocKeywords | isAggregatable="true" |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |
| ShortName | lblSpecShortName | |
| SodiumDisplay | lblSodiumPerHundredGram | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.NutrientItemPerHundredGramDataTransformerFactory,PlatformExtensions$lblSodium" |
| SodiumPerServingDisplay | lblSodiumPerServing | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.NutrientItemPerServingDataTransformerFactory,PlatformExtensions$lblSodium" |
| SpecName | lblSpecName | |
| SpecNumber | lblSpecNumber | |
| SupercedesLangAware | lblSupercedes | |
| Taxonomy | lblTaxonomy | |
| Thumbnail | lblThumbnail | enableHandler="Class:Xeno.Web.UI.Common.Controls.Thumbnail.EQTEnableHandler,WebCommon$5750" dataFormatter="Singleton:Xeno.Web.UI.Common.Controls.Thumbnail.EQTDataFormatter,WebCommon" hideHeader="true" disableExport="true" sortingEnabled="false" |
| TotalFatDisplay | lblTotalFatPerHundredGram | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.NutrientItemPerHundredGramDataTransformerFactory,PlatformExtensions$lblTotalFat" |
| TotalFatPerServingDisplay | lblTotalFatPerServing | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.NutrientItemPerServingDataTransformerFactory,PlatformExtensions$lblTotalFat" |
| TotalSugarDisplay | lblTotalSugarPerHundredGram | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.NutrientItemPerHundredGramDataTransformerFactory,PlatformExtensions$lblTotalSugar" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| TotalSugarPerServingDisplay | lblTotalSugarPerServing | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.NutrientItemPerServingDataTransformerFactory,PlatformExtensions$lblTotalSugar" |
| WorkflowName | lblWorkflow | |

## Packaging Specification

### View: SpecSummaryView

### Model: Packaging Specifications

| Data Field | Data Field Caption | Notes |
|---|---|---|
| ApprovedForUseBUDisplayName | lblBusinessUnit | isAggregatable="true" dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.BusinessUnitDataColumnTransformerFactory,EQTService" |
| AssociatedSpecAssocDisplay | lblAssociatedSpecAssociation | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$1009 \| display" |
| AssociatedSpecERPIDDisplayName | lblAssociatedSpecERPID | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$1009 \| display" |
| AssociatedSpecNameDisplay | lblAssociatedSpecName | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$1009 \| display" |
| AssociatedSpecNumberDisplay | lblAssociatedSpecNumber | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$1009 \| display" |
| ConceptDisplay | lblConcept | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.TaxonomyAliasDataColumnTransformerFactory,EQTService$FoodserviceConcept" isAggregatable="true" |
| CountriesWhereUsedDisplayName | lblCountriesWhereUsed | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.CountryDataColumnTransformerFactory,EQTService" isAggregatable="true" |
| Created | lblCreated | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| ctxSysEquiv | lblPreferredEquivalent | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.GSMContextSensitiveEquivalentDataTransormerFactory,PlatformExtensions" enableHandler="Class:Xeno.Prodika.EQTService.SearchablePropertyHandlers.FeaturePropertyItemEnabledResolverFactory,EQTService$GSM.EQT.CrossReferences.Enabled" |
| CurrentStatus | lblSpecSummaryStatus | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.WorkflowStatusDataColumnTransformerFactory,EQTService" |
| CurrentWorkflowGroup | lblCurrentWorkFlowGroup | dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.Transformers.CurrentWorkflowGroupDataColumnTransformerFactory,ReadyReportsLib" isAggregatable="true" |
| CurrentWorkflowOwner | lblCurrentWorkFlowOwner | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" isAggregatable="true" |
| Description | lblDescription | |
| Effective | lblSpecSummaryEffective | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| Inactive | lblSpecSummaryInactive | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| ItemType | lblItemType | |
| LastEdit | lblLastEdited | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$1009" |
| Originator | lblOriginator | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| RichTextDocKeywordsDisplay | lblRichTextDocKeywords | isAggregatable="true" |
| SDMAttachmentDisplay | lblAttachmentName | isAggregatable="true" |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |
| ShortName | lblSpecShortName | |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| SourcingFacilityDisplayName | lblSourceFacility | isAggregatable="true" dataTransformer="Singleton:EQTModels.BusinessUnitSecurity.BUSecuredFacilityNameDataColumnTransformerFactory,EQTModels" |
| SourcingNumberSpec | lblSourcingNumber | isAggregatable="true" |
| SpecName | lblSpecName | |
| SpecNumber | lblSpecNumber | |
| SpecStatus | lblSpecSummaryStatus | |
| SupercedesLangAware | lblSupercedes | |
| SupplierPartNumberDisplayName | lblSupplierItemNumber | isAggregatable="true" |
| SystemNameDisplayName | lblSystemName | isAggregatable="true" |
| SystemEquivalentDisplay | lblSysEquivCtlEquivalent | isAggregatable="true" |
| Taxonomy | lblTaxonomy | |
| Thumbnail | lblThumbnail | enableHandler="Class:Xeno.Web.UI.Common.Controls.Thumbnail.EQTEnableHandler,WebCommon$1009" dataFormatter="Singleton:Xeno.Web.UI.Common.Controls.Thumbnail.EQTDataFormatter,WebCommon" hideHeader="true" disableExport="true" sortingEnabled="false" |
| VendorHasApprovedDisplayName | lblVendorHasApproved | dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.Transformers.VendorHasApprovedDataColumnTransformerFactory,ReadyReportsLib" isAggregatable="true" |
| WorkflowName | lblWorkflow | |

## Packing Config Specification

### View: SpecSummaryView

### Model: Packing Configuration Specifications

| Data Field | Data Field Caption | Notes |
|---|---|---|
| ApprovedForUseBUDisplayName | lblBusinessUnit | isAggregatable="true" dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.BusinessUnitDataColumnTransformerFactory,EQTService" |
| AssociatedSpecAssocDisplay | lblAssociatedSpecAssociation | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$2076\|display" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| AssociatedSpecERPIDDisplayName | lblAssociatedSpecERPID | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$2076 \| display" |
| AssociatedSpecNameDisplay | lblAssociatedSpecName | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$2076 \| display" |
| AssociatedSpecNumberDisplay | lblAssociatedSpecNumber | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$2076 \| display" |
| ConceptDisplay | lblConcept | ataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.TaxonomyAliasDataColumnTransformerFactory,EQTService$FoodserviceConcept" isAggregatable="true" |
| CountriesWhereUsedDisplayName | lblCountriesWhereUsed | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.CountryDataColumnTransformerFactory,EQTService" isAggregatable="true" |
| Created | lblCreated | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| ctxSysEquiv | llblPreferredEquivalent | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.GSMContextSensitiveEquivalentDataTransormerFactory,PlatformExtensions" enableHandler="Class:Xeno.Prodika.EQTService.SearchablePropertyHandlers.FeaturePropertyItemEnabledResolverFactory,EQTService$GSM.EQT.CrossReferences.Enabled" |
| CurrentStatus | lblSpecSummaryStatus | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.WorkflowStatusDataColumnTransformerFactory,EQTService" |
| CurrentWorkflowGroup | lblCurrentWorkFlowGroup | dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.Transformers.CurrentWorkflowGroupDataColumnTransformerFactory,ReadyReportsLib" isAggregatable="true" |
| CurrentWorkflowOwner | lblCurrentWorkFlowOwner | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" isAggregatable="true" |
| Description | lblDescription | |
| Effective | lblSpecSummaryEffective | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| Inactive | lblSpecSummaryInactive | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| LastEdit | lblLastEdited | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$2076" |
| Originator | lblOriginator | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| RichTextDocKeywordsDisplay | lblRichTextDocKeywords | isAggregatable="true" |
| SDMAttachmentDisplay | lblAttachmentName | isAggregatable="true" |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |
| ShortName | lblSpecShortName | |
| SpecName | lblSpecName | |
| SpecNumber | lblSpecNumber | |
| SupercedesLangAware | lblSupercedes | |
| SystemEquivalentDisplay | lblSysEquivCtlEquivalent | isAggregatable="true" |
| SystemNameDisplayName | lblSystemName | isAggregatable="true" |
| Taxonomy | lblTaxonomy | |
| Thumbnail | lblThumbnail | enableHandler="Class:Xeno.Web.UI.Common.Controls.Thumbnail.EQTEnableHandler,WebCommon$2076" dataFormatter="Singleton:Xeno.Web.UI.Common.Controls.Thumbnail.EQTDataFormatter,WebCommon" hideHeader="true" disableExport="true" sortingEnabled="false" |
| WorkflowName | lblWorkflow | |

## Printed Packaging Specification

### View: SpecSummaryView

### Model: Printed Packaging Specifications

| Data Field | Data Field Caption | Notes |
|---|---|---|
| ApprovedForUseBUDisplayName | lblBusinessUnit | isAggregatable="true" dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.BusinessUnitDataColumnTransformerFactory,EQTService" |
| AssociatedSpecAssocDisplay | lblAssociatedSpecAssociation | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$2121 \| display" |
| AssociatedSpecERPIDDisplayName | lblAssociatedSpecERPID | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$2121 \| display" |
| AssociatedSpecNameDisplay | lblAssociatedSpecName | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$2121 \| display" |
| AssociatedSpecNumberDisplay | lblAssociatedSpecNumber | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$2121 \| display" |
| ConceptDisplay | lblConcept | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.TaxonomyAliasDataColumnTransformerFactory,EQTService$FoodserviceConcept" isAggregatable="true" |
| CountriesWhereUsedDisplayName | lblCountriesWhereUsed | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.CountryDataColumnTransformerFactory,EQTService" isAggregatable="true" |
| Created | lblCreated | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| ctxSysEquiv | lblPreferredEquivalent | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.GSMContextSensitiveEquivalentDataTransormerFactory,PlatformExtensions" enableHandler="Class:Xeno.Prodika.EQTService.SearchablePropertyHandlers.FeaturePropertyItemEnabledResolverFactory,EQTService$GSM.EQT.CrossReferences.Enabled" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| CurrentStatus | lblSpecSummaryStatus | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.WorkflowStatusDataColumnTransformerFactory,EQTService" |
| CurrentWorkflowGroup | lblCurrentWorkFlowGroup | dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.Transformers.CurrentWorkflowGroupDataColumnTransformerFactory,ReadyReportsLib" isAggregatable="true" |
| CurrentWorkflowOwner | lblCurrentWorkFlowOwner | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" isAggregatable="true" |
| Effective | lblSpecSummaryEffective | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| Inactive | lblSpecSummaryInactive | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| LastEdit | lblLastEdited | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$2121" |
| Originator | lblOriginator | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| RichTextDocKeywordsDisplay | lblRichTextDocKeywords | isAggregatable="true" |
| SDMAttachmentDisplay | lblAttachmentName | isAggregatable="true" |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |
| ShortName | lblSpecShortName | |
| SourcingFacilityDisplayName | lblSourceFacility | isAggregatable="true" dataTransformer="Singleton:EQTModels.BusinessUnitSecurity.BUSecuredFacilityNameDataColumnTransformerFactory,EQTModels" |
| SourcingNumberSpec | lblSourcingNumber | isAggregatable="true" |
| SpecName | lblSpecName | |
| SpecNumber | lblSpecNumber | |
| SupercedesLangAware | lblSupercedes | |
| SupplierPartNumberDisplayName | lblSupplierItemNumber | isAggregatable="true" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| SystemNameDisplayName | lblSystemName | isAggregatable="true" |
| SystemEquivalentDisplay | lblSysEquivCtlEquivalent | isAggregatable="true" |
| Taxonomy | lblTaxonomy | |
| Thumbnail | lblThumbnail | enableHandler="Class:Xeno.Web.UI.Common.Controls.Thumbnail.EQTEnableHandler,WebCommon$2121" dataFormatter="Singleton:Xeno.Web.UI.Common.Controls.Thumbnail.EQTDataFormatter,WebCommon" hideHeader="true" disableExport="true" sortingEnabled="false" |
| VendorHasApprovedDisplayName | lblVendorHasApproved | dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.Transformers.VendorHasApprovedDataColumnTransformerFactory,ReadyReportsLib" isAggregatable="true" |
| WorkflowName | lblWorkflow | |

## Product Specification

### View: SpecSummaryView

### Model: Product Specifications

| Data Field | Data Field Caption | Notes |
|---|---|---|
| AdditivesContainedDisplay | lblctlComplianceAdditives | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Additives" |
| AdditivesNotContDisplay | lblComplianceAdditivesNotContained | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Additives" |
| AdditivesMayContDisplay | lblComplianceAdditivesMayContain | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Additives" |
| AllergensContainedDisplay | lblctlComplianceAllergens | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Allergens" |
| AllergensNotContDisplay | lblComplianceAllergensNotContained | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Allergens" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| AllergensMayContDisplay | lblComplianceAllergensMayContain | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Allergens" |
| ApprovedForUseBUDisplayName | lblBusinessUnit | isAggregatable="true" dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.BusinessUnitDataColumnTransformerFactory,EQTService" |
| AssociatedSpecAssocDisplay | lblAssociatedSpecAssociation | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$6501 \| display" |
| AssociatedSpecERPIDDisplayName | lblAssociatedSpecERPID | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$6501 \| display" |
| AssociatedSpecNameDisplay | lblAssociatedSpecName | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$6501 \| display" |
| AssociatedSpecNumberDisplay | lblAssociatedSpecNumber | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$6501 \| display" |
| BusinessUnit | lblBusinessUnit | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.BusinessUnitDataColumnTransformerFactory,EQTService" isAggregatable="true" aggregationDelimiter=", " |
| CompliesWithDisplay | lblctlComplianceCompliesWith | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$CompliesWith" |
| ConceptDisplay | lblConcept | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.TaxonomyAliasDataColumnTransformerFactory,EQTService$FoodserviceConcept" isAggregatable="true" |
| Created | lblCreated | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| ctxSysEquiv | lblPreferredEquivalent | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.GSMContextSensitiveEquivalentDataTransormerFactory,PlatformExtensions" enableHandler="Class:Xeno.Prodika.EQTService.SearchablePropertyHandlers.FeaturePropertyItemEnabledResolverFactory,EQTService$GSM.EQT.CrossReferences.Enabled" |
| CurrentStatus | lblSpecSummaryStatus | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.WorkflowStatusDataColumnTransformerFactory,EQTService" |
| CurrentWorkflowGroup | lblCurrentWorkFlowGroup | dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.Transformers.CurrentWorkflowGroupDataColumnTransformerFactory,ReadyReportsLib" isAggregatable="true" |
| CurrentWorkflowOwner | lblCurrentWorkFlowOwner | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" isAggregatable="true" |
| Effective | lblSpecSummaryEffective | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| ERPSystemNameAndID | lblERPSystemNameAndID | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.LegacySystemEquivalentDataColumnTransformerFactory,EQTService" isAggregatable="true" |
| IngredientStatement | lblIngredientStatement | |
| IntolerancesContainedDisplay | lblctlComplianceIntolerances | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Intolerances" |
| IntolerancesNotContDisplay | lblComplianceIntolerancesNotContained | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Intolerances" |
| IntolerancesMayContDisplay | lblComplianceIntolerancesMayContain | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Intolerances" |
| LastEdit | lblLastEdited | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$6501" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| Originator | lblOriginator | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| ProductClassificationName | lblClassification | isAggregatable="true" |
| ProductStandardDisplay | lblStandard | |
| RichTextDocKeywordsDisplay | lblRichTextDocKeywords | isAggregatable="true" |
| SDMAttachmentDisplay | lblAttachmentName | isAggregatable="true" |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |
| ShortName | lblSpecShortName | |
| SourcingFacilityDisplayName | lblSourceFacility | isAggregatable="true" dataTransformer="Singleton:EQTModels.BusinessUnitSecurity.BUSecuredFacilityNameDataColumnTransformerFactory,EQTModels" |
| SourcingNumberSpec | lblSourcingNumber | isAggregatable="true" |
| SpecName | lblSpecName | |
| SpecNumber | lblSpecNumber | |
| SupercedesLangAware | lblSupercedes | |
| SupplierPartNumberDisplayName | lblSupplierItemNumber | isAggregatable="true" |
| SystemNameDisplayName | lblSystemName | isAggregatable="true" |
| SystemEquivalentDisplay | lblSysEquivCtlEquivalent | isAggregatable="true" |
| Taxonomy | lblTaxonomy | |
| Thumbnail | lblThumbnail | enableHandler="Class:Xeno.Web.UI.Common.Controls.Thumbnail.EQTEnableHandler,WebCommon$6501" dataFormatter="Singleton:Xeno.Web.UI.Common.Controls.Thumbnail.EQTDataFormatter,WebCommon" hideHeader="true" disableExport="true" sortingEnabled="false" |
| VendorHasApprovedDisplayName | lblVendorHasApproved | dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.Transformers.VendorHasApprovedDataColumnTransformerFactory,ReadyReportsLib" isAggregatable="true" |
| WorkflowName | lblWorkflow | |

## Testing Protocol

### View: SpecSummaryView

### Model: Testing Protocols

| Data Field | Data Field Caption | Notes |
|---|---|---|
| Id | lblTestingProtocolID | |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$2078" |
| TestingProtocolCreated | lblCreated | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| TestingProtocolDescription | lblDescription | |
| TestingProtocolLastEdit | lblLastEdited | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| TestingProtocolName | lbProtocolName | |
| TestingProtocolOriginator | lblOriginator | |
| TestingProtocolScope | lblScope | |
| TestingProtocolStatus | lblStatus | |

# Trade Specification

### View: SpecSummaryView

### Model: Trade Specifications

| Data Field | Data Field Caption | Notes |
|---|---|---|
| ActualClaimsDisplayName | lblActualLabelClaims | isAggregatable="true" |
| AdditivesContainedDisplay | lblctlComplianceAdditives | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Additives" |
| AdditivesNotContDisplay | lblComplianceAdditivesNotContained | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Additives" |
| AdditivesMayContDisplay | lblComplianceAdditivesMayContain | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Additives" |
| AllergensContainedDisplay | lblctlComplianceAllergens | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Allergens" |
| AllergensNotContDisplay | lblComplianceAllergensNotContained | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Allergens" |
| AllergensMayContDisplay | lblComplianceAllergensMayContain | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Allergens" |
| ApprovedForUseBUDisplayName | lblBusinessUnit | isAggregatable="true" dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.BusinessUnitDataColumnTransformerFactory,EQTService" |
| AssociatedSpecAssocDisplay | lblAssociatedSpecAssociation | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$2147\|display" |
| AssociatedSpecERPIDDisplayName | lblAssociatedSpecERPID | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$2147\|display" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| AssociatedSpecNameDisplay | lblAssociatedSpecName | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$2147 \| display" |
| AssociatedSpecNumberDisplay | lblAssociatedSpecNumber | isAggregatable="true" enableHandler="Class:Xeno.Prodika.GSMLib.EQTSearchablePropertyHandlers.AssocSpecConfigPropertyItemEnabledResolverFactory,GSMLib$2147 \| display" |
| Brand | llblBrand | |
| CompliesWithDisplay | lblctlComplianceCompliesWith | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$CompliesWith" |
| ConceptDisplay | lblConcept | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.TaxonomyAliasDataColumnTransformerFactory,EQTService$FoodserviceConcept" isAggregatable="true" |
| CountriesWhereUsedDisplayName | lblCountriesWhereUsed | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.CountryDataColumnTransformerFactory,EQTService" isAggregatable="true" |
| CountryOfOriginDisplay | lblCountryOfOrigin | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.CountryDataColumnTransformerFactory,EQTService" |
| Created | lblCreated | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| ctxSysEquiv | lblPreferredEquivalent | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.GSMContextSensitiveEquivalentDataTransormerFactory,PlatformExtensions" enableHandler="Class:Xeno.Prodika.EQTService.SearchablePropertyHandlers.FeaturePropertyItemEnabledResolverFactory,EQTService$GSM.EQT.CrossReferences.Enabled" |
| CurrentStatus | lblSpecSummaryStatus | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.WorkflowStatusDataColumnTransformerFactory,EQTService" |
| CurrentWorkflowGroup | lblCurrentWorkFlowGroup | dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.Transformers.CurrentWorkflowGroupDataColumnTransformerFactory,ReadyReportsLib" isAggregatable="true" |
| CurrentWorkflowOwner | lblCurrentWorkFlowOwner | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" isAggregatable="true" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| Effective | lblSpecSummaryEffective | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| GtinUpcNumber | lblGTINUPC | |
| IngredientStatement | lblNutrientProfileIngredientStatement | |
| IntolerancesContainedDisplay | lblctlComplianceIntolerances | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Intolerances" |
| IntolerancesNotContDisplay | lblComplianceIntolerancesNotContained | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Intolerances" |
| IntolerancesMayContDisplay | lblComplianceIntolerancesMayContain | isAggregatable="true" dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$Intolerances" |
| ItemType | lblItemType | |
| LastEdit | lblLastEdited | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$2147" |
| Originator | lblOriginator | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| PotentialClaimsDisplayName | lblPotentialLabelClaims | isAggregatable="true" |
| RichTextDocKeywordsDisplay | lblRichTextDocKeywords | isAggregatable="true" |
| SDMAttachmentDisplay | lblAttachmentName | isAggregatable="true" |
| SegmentName | SegmentName lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |
| ShortName | lblSpecShortName | |
| SourcingNumberSpec | lblSourcingNumber | isAggregatable="true" |
| SpecName | lblSpecName | |
| SpecNumber | lblSpecNumber | |
| SpecStatus | lblSpecSummaryStatus | |
| SupercedesLangAware | lblSupercedes | |
| SystemEquivalentDisplay | lblSysEquivCtlEquivalent | isAggregatable="true" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| SystemNameDisplayName | lblSystemName | isAggregatable="true" |
| Taxonomy | lblTaxonomy | |
| UDEXClassificationDisplayNam e | lblUDEXClassification | |
| WorkflowName | lblWorkflow | |

# NPD

## Innovations/Sales Pipeline

### View: NPDIdeaView

### Model: Ideas

| Data Field | Data Field Caption | Notes |
|---|---|---|
| AdminsCaption | llblAdmins | |
| BusinessUnitsDisplayName | lblBusinessUnit | isAggregatable="true" |
| InternalProjectNumber | lblInternalProjectNumber | |
| MRUWeight | lblMRUWeight | lblMRUWeight enableHandler="Class:Xeno.Prodika.MRUS ervice.MostRecentlyUsedItemObjectEnable dResolverFactory$3410" |
| RequestDate | lblRequestDate | dataFormatter="Singleton:Xeno.Prodika.E QTService.FormatValueDelegates.ShortDat eCharMonthFormatValueDelegateFactory,E QTService" |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Commo n.SegmentPropertyItemWithUserTypeEnab ledResolverFactory,EQTModels$UGMUser " |
| StatusName | llblStatus | |
| Title | lblTitle | |

## Project

### View: ProjectView

### Model: Projects

| Data Field | Data Field Caption | Notes |
|---|---|---|
| BrandDisplayName | lblBrands | |
| BusinessUnitsDisplayName | lblExactMatchBU | |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| Description | lblDescription | |
| DevelopmentStageTitle | lblDevelopmentStageTitle | |
| InternalProjectNumber | lblInternalProjectNumber | |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$3202" |
| OriginationDate | lblOriginationDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| Private | lblPrivate | dataFormatter="Singleton:Xeno.Prodika.EQTService.DataFormatters.BooleanTypeFormatValueDelegateFactory,PlatformExtensions" |
| ProjectNumber | lblProjectNumber | |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |
| StatusName | lblStatus | |
| StrategicBriefTitle | lblStrategicBriefTitle | |
| TeamLeadersCaption | lblTeamLeaders | |
| Title | lblTitle | |

## Strategic Brief

### View: StrategicBriefView

### Model: Strategic Briefs

| Data Field | Data Field Caption | Notes |
|---|---|---|
| BrandDisplayName | lblBrands | isAggregatable="true" |
| BusinessUnitsDisplayName | lblBusinessUnit | isAggregatable="true" |
| ChannelDisplayName | lblChannels | isAggregatable="true" |
| CountriesDisplayName | lblLeadCountries | isAggregatable="true" |
| GlobalCategoriesDisplayName | lblGlobalCategories | isAggregatable="true" |
| KeySponsorsDisplayName | lblKeySponsors | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" isAggregatable="true" |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$3211" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| OriginationDate | lblOriginationDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |
| StatusName | lblStatus | |
| StrategicBriefNumber | lblStrategicBriefNumber | |
| Title | lblTitle | |

# NSM

## Nutrient Analysis

### View: NutrientAnalysisMainView

### Model: Nutrient Analysis

| Data Field | Data Field Caption | Notes |
|---|---|---|
| analysisDate_View | lblDateOfAnalysis | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| AnalysisNumber | lblAnalysisNumber | |
| ApprovedForUseBU | lblApprovedUsageBU | isAggregatable="true" dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.BusinessUnitDataColumnTransformerFactory,EQTService" |
| Composites | lblComposites | dataTransformer="Singleton:Xeno.Prodika.NSMLib.EQT.NSMCompositeNumberTransformerFactory,NSMLib" isAggregatable="true" aggregationDelimiter=", " |
| Description | lblDescription | |
| GTINUPC | lblGTINUPC | |
| LastUpdated | lblLastUpdated | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$6152" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| ReceivedFromLab | lblReceivedFromLab | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| SampleNumber | lblSampleNumber | |
| SampleType | lblSampleType | |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |
| SentToLab | lblSentToLab | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| SourceFacilityDisplay | lblSourceFacility | dataTransformer="Singleton:EQTModels.BusinessUnitSecurity.BUSecuredFacilityNameDataColumnTransformerFactory,EQTModels" |
| SpecName | lblSpecName | |

## Nutrient Composite

### View: NutrientCompositeView

### Model: Nutrient Composites

| Data Field | Data Field Caption | Notes |
|---|---|---|
| ApprovedForUseBU | lblApprovedUsageBU | isAggregatable="true" dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.BusinessUnitDataColumnTransformerFactory,EQTService" |
| CompositeDate_View | lblDateOfComposite | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| CompositeNumber | lblCompositeNumber | |
| LastUpdated | lblLastUpdated | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$6150" |
| OriginatorDisplay | lblOriginator | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |
| SpecName | lblSpecName | |
| Title | lblTitle | |

# PQM

## Action

### View: PQMActionView

### Model: PQM Actions

| Data Field | Data Field Caption | Notes |
|---|---|---|
| AffectedItemsEquvDisplay | lblAffectedItemsEquivalent | isAggregatable="true" |
| AffectedItemsNonRevDisplay | lblAffectedItemsRevisionIndependent | isAggregatable="true" aggregationDelimiter=", " |
| AffectedItemsWithRevDisplay | llblAffectedItemsWithRevision | isAggregatable="true" aggregationDelimiter=", " |
| AssociatedProjectDisplay | lblAssociatedProject | |
| CompanyDisplay | lblCompany | dataTransformer="Singleton:EQTModels.BusinessUnitSecurity.BUSecuredCompanyNameDataColumnTransformerFactory,EQTModels" isAggregatable="true" |
| ctxSysEquiv | lblPreferredEquivalent | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.PQMContextSensitiveEquivalentDataTransormerFactory,PlatformExtensions" enableHandler="Class:Xeno.Prodika.EQTService.SearchablePropertyHandlers.FeaturePropertyItemEnabledResolverFactory,EQTService$PQM.EQT.CrossReferences.Enabled" |
| CustomerDisplay | lblCustomer | dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$PQMCustomers" isAggregatable="true" enableHandler="Class:EQTModels.Common.HideToSupplierFeaturePropertyItemEnabledResolverFactory,EQTModels$!PQM.Customers.HiddenToSupplier.Enabled" |
| FacilityDisplay | lblFacility | dataTransformer="Singleton:EQTModels.BusinessUnitSecurity.BUSecuredFacilityNameDataColumnTransformerFactory,EQTModels" isAggregatable="true" aggregationDelimiter=", " |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| ItemNumber | lblActionNumber | |
| LastEditedDate | lblLastEditDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$7003" |
| Originated | lblOriginationDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| Originator | lblOriginator | dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.UserSupplierNameDataColumnTransformerFactory,ReadyReportsLib" |
| ProductLinesDisplay | lblProductLines | dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$PQMProductLines" isAggregatable="true" enableHandler="Class:EQTModels.Common.HideToSupplierFeaturePropertyItemEnabledResolverFactory,EQTModels$!PQM.ProductLines.HiddenToSupplier.Enabled" |
| PQMActionType | lblPQMActionType | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.KeyValLookupItemDataColumnTransformerFactory,EQTService$PQMActionTypes" |
| PQMDescription | lblPQMDescription | |
| PQMStatus | lblStatus | |
| PQMTitle | lblProblemStatement | |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels" |

## Audit

### View: PQMAuditView

### Model: PQM Audits

| Data Field | Data Field Caption | Notes |
|---|---|---|
| ActualAuditDate | lblActualAuditDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| AffectedItemsEquvDisplay | lblAffectedItemsEquivalent | isAggregatable="true" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| AffectedItemsNonRevDisplay | lblAffectedItemsRevisionIndependent | dataTransformer="Class:Xeno.Prodika.Services.PQM.DataTransformers.AffectedItemSpecNumberNoRevDataColumnTransformerFactory,PQMLib$7004" |
| AffectedItemsWithRevDisplay | lblAffectedItemsWithRevision | dataTransformer="Singleton:Xeno.Prodika.Services.PQM.DataTransformers.AffectedItemSpecNumberWithRevDataColumnTransformerFactory,PQMLib" |
| AuditResult | lblAuditResult | dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$PQMAuditResults" |
| CompanyDisplay | lblCompany | dataTransformer="Singleton:EQTModels.BusinessUnitSecurity.BUSecuredCompanyNameDataColumnTransformerFactory,EQTModels" isAggregatable="true" |
| ctxSysEquiv | lblPreferredEquivalent | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.PQMContextSensitiveEquivalentDataTransormerFactory,PlatformExtensions" enableHandler="Class:Xeno.Prodika.EQTService.SearchablePropertyHandlers.FeaturePropertyItemEnabledResolverFactory,EQTService$PQM.EQT.CrossReferences.Enabled" |
| CustomerDisplay | lblCustomer | dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$PQMCustomers" isAggregatable="true" enableHandler="Class:EQTModels.Common.HideToSupplierFeaturePropertyItemEnabledResolverFactory,EQTModels$!PQM.Customers.HiddenToSupplier.Enabled" |
| FacilityDisplay | lblFacility | dataTransformer="Singleton:Xeno.Prodika.Services.PQM.DataTransformers.PQMItemBUSecuredFacilityNameDataColumnTransformerFactory,PQMLib" |
| ItemNumber | llblAuditNumber | |
| LastEditedDate | lblLastEditDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$7004" |
| Originated | lblOriginationDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| Originator | lblOriginator | dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.UserSupplierNameDataColumnTransformerFactory,ReadyReportsLib" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| PlannedAuditDate | lblPlannedAuditDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| PQMAuditType | lblPQMAuditType | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.KeyValLookupItemDataColumnTransformerFactory,EQTService$PQMAuditTypes" |
| PQMDescription | lblPQMDescription | |
| PQMStatus | lblStatus | |
| PQMTitle | lblProblemStatement | |
| ProductLinesDisplay | lblProductLines | dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$PQMProductLines" isAggregatable="true" enableHandler="Class:EQTModels.Common.HideToSupplierFeaturePropertyItemEnabledResolverFactory,EQTModels$!PQM.ProductLines.HiddenToSupplier.Enabled" |
| RelatedActionsDisplay | lblRelatedActions | isAggregatable="true" dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.PQMNameDataColumnTransformerFactory,ReadyReportsLib" |
| RelatedIssuesDisplay | lblRelatedIssues | isAggregatable="true" dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.PQMNameDataColumnTransformerFactory,ReadyReportsLib" |
| SegmentName | SegmentName lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels" |

## Issue

### View: PQMIssueView

### Model: PQM Issues

| Data Field | Data Field Caption | Notes |
|---|---|---|
| AffectedItemsEquvDisplay | lblAffectedItemsEquivalent | isAggregatable="true" |
| AffectedItemsNonRevDisplay | lblAffectedItemsRevisionIndependent | isAggregatable="true" aggregationDelimiter=", " |
| AffectedItemsWithRevDisplay | lblAffectedItemsWithRevision | isAggregatable="true" aggregationDelimiter=", " |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| CompanyDisplay | lblCompany | dataTransformer="Singleton:EQTModels.BusinessUnitSecurity.BUSecuredCompanyNameDataColumnTransformerFactory,EQTModels" isAggregatable="true" |
| ctxSysEquiv | lblPreferredEquivalent | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.PQMContextSensitiveEquivalentDataTransormerFactory,PlatformExtensions" enableHandler="Class:Xeno.Prodika.EQTService.SearchablePropertyHandlers.FeaturePropertyItemEnabledResolverFactory,EQTService$PQM.EQT.CrossReferences.Enabled" |
| CustomerDisplay | lblCustomer | dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$PQMCustomers" isAggregatable="true" enableHandler="Class:EQTModels.Common.HideToSupplierFeaturePropertyItemEnabledResolverFactory,EQTModels$!PQM.Customers.HiddenToSupplier.Enabled" |
| Disposition | lblDisposition | dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$PQMIssueDispositions" |
| ExpectedResolutionDate | lblExpectedResolutionDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| FacilityDisplay | lblFacility | dataTransformer="Singleton:EQTModels.BusinessUnitSecurity.BUSecuredFacilityNameDataColumnTransformerFactory,EQTModels" isAggregatable="true" aggregationDelimiter=", " |
| ItemNumber | lblIssueNumber | |
| LastEditedDate | lblLastEditDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$7002" |
| OccurrenceDate | lblOccurrenceDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| Originated | lblOriginationDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| Originator | lblOriginator | dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.UserSupplierNameDataColumnTransformerFactory,ReadyReportsLib" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| PQMDescription | lblPQMDescription | |
| PQMIssueType | lblPQMIssueType | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.KeyValLookupItemDataColumnTransformerFactory,EQTService$PQMIssueTypes" |
| PQMStatus | lblStatus | |
| PQMTitle | lblProblemStatement | |
| ProductLinesDisplay | lblProductLines | dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$PQMProductLines" isAggregatable="true" enableHandler="Class:EQTModels.Common.HideToSupplierFeaturePropertyItemEnabledResolverFactory,EQTModels$!PQM.ProductLines.HiddenToSupplier.Enabled" |
| RelatedActionsDisplay | lblRelatedActions | isAggregatable="true" dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.PQMNameDataColumnTransformerFactory,ReadyReportsLib" |
| RelatedAuditsDisplay | lblRelatedAudits | isAggregatable="true" dataTransformer="Singleton:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.PQMNameDataColumnTransformerFactory,ReadyReportsLib" |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels" |
| Severity | lblSeverity | dataTransformer="Class:Oracle.PLM4P.ReadyReports.Lib.DataColumnTransformers.LookupDataColumnTransformerFactory,ReadyReportsLib$PQMIssueSeverities" |

# PQS

## Lot Sample

### View: LotSampleView

### Model: Samples

| Data Field | Data Field Caption | Notes |
|---|---|---|
| CreationDate | lblCreationDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateFormatValueDelegateFactory,EQTService" |
| GTINUPCEAN | lblGTINUPCEAN | |
| InternalAlias | lblInternalAlias | |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| InternalSampleID | lblSampleNumber | |
| LogReceivingNumber | lblLogReceivingNumber | |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$5270" |
| ProductionDate | lblManufactureDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| ReceivingDate | lblDateRcvd | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| ReceivingFacilityNameDisplay | lblReceivingFac | |
| SampleLocation | lblLocation | |
| SampleNotes | lblNotes | |
| SampleNumber | lblCodeDate | |
| SampleTypeDisplay | lblSampleType | |
| SessionLocationDisplay | lblSrcFacilityCountry | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.CountryDataColumnTransformerFactory,EQTService" |
| SourceFacilityName | lblSourceFacility | |
| SpecName | lblSpecName | |
| SpecNameNumber | lblSpecNameNumber | |
| SpecNumber | lblSpecNumber | |
| TestScheduledDate | blScheduledEvaluationDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| UseThroughDate | lblUseThroughDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| WayBill | lblWayBill | |

## Session

### View: SessionView

### Model: Sessions

| Data Field | Data Field Caption | Notes |
|---|---|---|
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$5271" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| SessionEvaluationDate | lblEvaluationDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| SessionLeaderDisplay | lblSessionLeader | |
| SessionLocationDisplay | lblLocation | |
| SessionName | lblSessionName | |
| SessionNumber | lblSessionNumber | |

## Scorecard

### View: ScorecardView

### Model: Scorecards

| Data Field | Data Field Caption | Notes |
|---|---|---|
| OriginatorDisplay | lblOriginator | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| Sample | lblSample | |
| SampleNumberDisplay | lblSample | |
| Score | lblScore | |
| ScorecardNumber | lblScorecardNumber | |
| ScoredByName | lblScoredBy | |
| ScoredDate | lblScoredDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| SpecName | lblSpecName | |
| SpecSumSpecName | lblSpecName | |

# SCRM

## Company

### View: CompanyMainSearchViewSingleSelectAlias

### Model: Companies

| Data Field | Data Field Caption | Notes |
|---|---|---|
| AltSpecSupplyCapDisplayName | lblAltSpecSupplyCap | isAggregatable="true" |
| ApprovedForUseBUDisplayName | lblApprovedUsageBU | isAggregatable="true" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| City | lblCityName | |
| CompanyName | lblCompanyName | |
| CompanyNumber | lblCompanyNumber | |
| CompanyStatusDisplayName | lblCompanyStatus | |
| CompanyCountryDisplayName | lblCountry | |
| ContactProfileLastName | lblContactProfileLastName | |
| ContactProfileFirstName | lblContactProfileFirstName | |
| ContactProfileUserName | lblContactProfileUserName | |
| CountryName | lblCountryName | |
| ctxSysEquiv | lblPreferredEquivalent | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.SCRMContextSensitiveEquivalentDataTransormerFactory,PlatformExtensions" enableHandler="Class:Xeno.Prodika.EQTService.SearchablePropertyHandlers.FeaturePropertyItemEnabledResolverFactory,EQTService$SCRM.EQT.CrossReferences.Enabled" |
| EquivalentDisplay | lblSystemEquivalent | isAggregatable="true" |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$5002" |
| PostalCode | lblPostalCode | |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels" |
| SpecAttributesDisplayName | lblSpecialAttributes | isAggregatable="true" |
| StateProvince | lblStateProvince | |

## Company/Facility SDM

### View: ManagedDocumentMultiSelect

### Model: Supporting Docs - Company/Facility

| Data Field | Data Field Caption | Notes |
|---|---|---|
| DocParentStOrProvName | lblStateProvince | |
| DocTypeNameDisplay | lblDocumentType | enableHandler="Class:Xeno.Prodika.Config.SDMFeatureEnabledResolverFactory,PlatformExtensions$DocumentType\|5001,5002" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| DocumentBusinessUnitDisplay | lblBusinessUnit | isAggregatable="true" dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.BusinessUnitDataColumnTransformerFactory,EQTService"> |
| DocCompanyStatusDisplay | lblParentStatus | |
| DocumentDescription | lblDescription | |
| DocumentEffectiveDateDisplay | lblEffectiveDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" enableHandler="Class:Xeno.Prodika.Config.SDMFeatureEnabledResolverFactory,PlatformExtensions$EffectiveDate \| 5001,5002" |
| DocumentExpirationDateDisplay | lblExpirationDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" enableHandler="Class:Xeno.Prodika.Config.SDMFeatureEnabledResolverFactory,PlatformExtensions$ExpirationDate \| 5001,5002" |
| DocumentParentCityName | lblCity | |
| DocumentParentCountryName | lblCountryName | |
| DocumentParentName | lblCompanyFacility | |
| DocumentParentPostalCode | lblPostalCode | |
| DocumentRequiredDateDisplay | lblRequiredDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" enableHandler="Class:Xeno.Prodika.Config.SDMFeatureEnabledResolverFactory,PlatformExtensions$DueDate \| 5001,5002" |
| ManagedDocStatusDisplay | lblStatus | enableHandler="Class:Xeno.Prodika.Config.SDMFeatureEnabledResolverFactory,PlatformExtensions$Status \| 5001,5002" |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$2231_5001,2231_5002" |
| Originator | lblOriginator | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| ParentFacility | lblCompany | dataTransformer="Singleton:EQTModels.BusinessUnitSecurity.BUSecuredFacilityCompanyNameDataColumnTransformerFactory,EQTModels" |
| ParentFacility | lblFacility | dataTransformer="Singleton:EQTModels.BusinessUnitSecurity.BUSecuredFacilityNameDataColumnTransformerFactory,EQTModels" |

## Facility

### View: FacilityMainSearchViewSingleSelect

### Model: Facilities

| Data Field | Data Field Caption | Notes |
|---|---|---|
| AltSpecSupplyCapDisplayName | lblAltSpecSupplyCap | |
| ApprovedForUseBUDisplayName | lblApprovedUsageBU | isAggregatable="true" |
| City | lblCityName | |
| CompanyName | lblCompanyName | |
| ContactProfileFirstName | lblContactProfileFirstName | |
| ContactProfileLastName | lblContactProfileLastName | |
| CountryName | lblCountryName | |
| ctxSysEquiv | llblPreferredEquivalent | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.SCRMContextSensitiveEquivalentDataTransormerFactory,PlatformExtensions" enableHandler="Class:Xeno.Prodika.EQTService.SearchablePropertyHandlers.FeaturePropertyItemEnabledResolverFactory,EQTService$SCRM.EQT.CrossReferences.Enabled" |
| FacilityName | lblFacilityName | |
| FacilityNumber | lblFacilityNumber | |
| FacilityStatusDisplayName | lblFacilityStatus | |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$5001" |
| PostalCode | lblPostalCode | |
| SpecAttributesDisplayName | lblSpecialAttributes | isAggregatable="true" |
| SpecEquivSourcedDisplay | lblSpecEquivSourced | isAggregatable="true" |
| SpecNumSourcedDisplay | lblSpecNumSourced | isAggregatable="true" |
| StateProvince | lblStateProvince | |
| SystemEquivalent | lblSystemEquivalent | isAggregatable="true" |
| UsedInFacilityPKIDDisplay | lblUsedIn | dataTransformer="Singleton:EQTModels.BusinessUnitSecurity.BUSecuredFacilityNameDataColumnTransformerFactory,EQTModels" isAggregatable="true" |
| VendorMaterialNumberDisplay | lblFacilitySACIngNum | isAggregatable="true" |

# Contact

### View: ContactProfileView

### Model: Contact Profiles

| Data Field | Data Field Caption | Notes |
|---|---|---|
| AssociatedCompanyDisplay | lblAssociatedCompany | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.SupplierAssociatedCompanyNamesDataTransformerFactory,PlatformExtensions" |
| AssociatedFacilityDisplay | lblAssociatedFacility | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.SupplierAssociatedFacilityNamesDataTransformerFactory,PlatformExtensions" |
| CompanyName | lblCompanyName | |
| CompanyTelephone | lblCompanyTelephone | |
| Email | lblEmailAddress | |
| FirstName | lblFirstName | |
| JobTitle | lblJobTitle | |
| LastLoginDateDisplay | lblLastLoginDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" |
| LastName | lblLastName | |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$5351" |
| Name | lblLoginName | |
| RepTelephone | lblRepTelephone | |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels$UGMUser" |
| UserStatus | lblUserStatus | |

## Non-Spec Sourcing Approval

### View: SourcingApprovalNonSpecView

### Model: Non-Spec Sourcing Approvals

| Data Field | Data Field Caption | Notes |
|---|---|---|
| CompanyName | lblCompanyName | |
| Description | lblDescription | |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$5019" |
| QAAssignedDisplay | lblQAAssigned | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| SACDescription | lblNotes | |
| SACStatus | lblStatus | |
| SCAssignedDisplay | lblSCAssigned | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" isAggregatable="true" |
| SegmentName | lblSegmentNameProperty | |
| SourcingClass | lblClass | |
| SourcingFacilityPKID | lblSourcingFacility | dataTransformer="Singleton:EQTModels.BusinessUnitSecurity.BUSecuredFacilityNameDataColumnTransformerFactory,EQTModels" |
| SourcingNumber | lblSourcingNumber | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels" |
| SourcingTypeDisplay | lblType | isAggregatable="true" aggregationDelimiter=", " dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.SourcingTypeDataTransformerFactory,PlatformExtensions" |
| UsedInFacilityPKIDDisplay | lblReceivingFac | dataTransformer="Singleton:EQTModels.BusinessUnitSecurity.BUSecuredFacilityNameDataColumnTransformerFactory,EQTModels" isAggregatable="true" aggregationDelimiter=", " |

## Spec Related Sourcing Approval

### View: SourcingApprovalView

### Model: Spec-Related Sourcing Approvals

| Data Field | Data Field Caption | Notes |
|---|---|---|
| ApprovedForUseBUDisplay | lblApprovedUsageBU | isAggregatable="true" |
| ApprovedForUseCptDisplay | lblApprovedUsageConcept | dataTransformer="Class:Xeno.Prodika.EQTService.DataTransformers.TaxonomyAliasDataColumnTransformerFactory,EQTService$FoodserviceConcept" isAggregatable="true" |
| AssignedReferenceDisplay | lblAssignedReference | |
| CompanyName | lblCompanyName | |
| ctxSysEquivDisplay | lblSpecEquivalent | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.ContextSensitiveSACEquivalentDataTransformerFactory,PlatformExtensions" enableHandler="Class:Xeno.Prodika.EQTService.SearchablePropertyHandlers.FeaturePropertyItemEnabledResolverFactory,EQTService$GSM.EQT.CrossReferences.Enabled" |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$5012" |
| QAAssignedDisplay | lblQAAssigned | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| SACDescription | lblNotes | |
| SACStatus | lblStatus | |
| SCAssignedDisplay | lblSCAssigned | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" isAggregatable="true" |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels" |
| SourcingClass | lblClass | |
| SourcingFacilityPKID | lblSourcingFacility | dataTransformer="Singleton:EQTModels.BusinessUnitSecurity.BUSecuredFacilityNameDataColumnTransformerFactory,EQTModels" |
| SourcingNumber | lblSourcingNumber | |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| SourcingTypeDisplay | llblType | isAggregatable="true" aggregationDelimiter=", " dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.SourcingTypeDataTransformerFactory,PlatformExtensions" |
| SpecName | lblSpecName | |
| SpecNumber | lblSpecNumber | |
| SpecTaxonomyDisplay | lblSpecificationTaxonomy | |
| SupplierPartNumber | lblSupplierItemNumber | |
| UsedInFacilityPKIDDisplay | lblReceivingFac | dataTransformer="Singleton:EQTModels.BusinessUnitSecurity.BUSecuredFacilityNameDataColumnTransformerFactory,EQTModels" isAggregatable="true" aggregationDelimiter=", " |

## Non-Spec Sourcing Approval SDM

### View: ManagedDocumentMultiSelect

### Model: Supporting Docs - Non-Spec SAC

| Data Field | Data Field Caption | Notes |
|---|---|---|
| DocParentStOrProvName | lblStateProvince | |
| DocTypeNameDisplay | lblDocumentType | enableHandler="Class:Xeno.Prodika.Config.SDMFeatureEnabledResolverFactory,PlatformExtensions$DocumentType \| 5019" |
| DocumentBusinessUnitDisplay | lblBusinessUnit | isAggregatable="true" dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.BusinessUnitDataColumnTransformerFactory,EQTService"> |
| DocumentEffectiveDateDisplay | lblEffectiveDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" enableHandler="Class:Xeno.Prodika.Config.SDMFeatureEnabledResolverFactory,PlatformExtensions$EffectiveDate \| 5019" |
| DocumentExpirationDateDisplay | lblExpirationDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" enableHandler="Class:Xeno.Prodika.Config.SDMFeatureEnabledResolverFactory,PlatformExtensions$ExpirationDate \| 5019" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| DocumentRequiredDateDisplay | lblRequiredDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" enableHandler="Class:Xeno.Prodika.Config.SDMFeatureEnabledResolverFactory,PlatformExtensions$DueDate \| 5019" |
| DocCompanyStatusDisplay | lblParentStatus | |
| DocumentDescription | lblDescription | |
| DocumentParentCityName | lblCity | |
| DocumentParentCountryName | lblCountryName | |
| DocumentParentName | lblCompanyFacility | |
| DocumentParentPostalCode | lblPostalCode | |
| ManagedDocStatus | lblStatus | enableHandler="Class:Xeno.Prodika.Config.SDMFeatureEnabledResolverFactory,PlatformExtensions$Status \| 5019" |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$2231_5019" |
| Originator | lblOriginator | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| ParentCompany | lblCompany | dataTransformer="Singleton:EQTModels.BusinessUnitSecurity.BUSecuredFacilityCompanyNameDataColumnTransformerFactory,EQTModels" |
| ParentFacility | lblFacility | dataTransformer="Singleton:EQTModels.BusinessUnitSecurity.BUSecuredFacilityNameDataColumnTransformerFactory,EQTModels" |

## Spec Sourcing Approval SDM

### View: ManagedDocumentMultiSelect

### Model: Supporting Docs - Spec-Related SAC

| Data Field | Data Field Caption | Notes |
|---|---|---|
| DocParentStOrProvName | lblStateProvince | |
| DocTypeNameDisplay | lblDocumentType | enableHandler="Class:Xeno.Prodika.Config.SDMFeatureEnabledResolverFactory,PlatformExtensions$DocumentType \| 5012" |
| DocumentBusinessUnitDisplay | lblBusinessUnit | isAggregatable="true" dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.BusinessUnitDataColumnTransformerFactory,EQTService">" |
| DocCompanyStatusDisplay | lblParentStatus | |
| DocumentDescription | lblDescription | |
| DocumentEffectiveDateDisplay | lblEffectiveDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" enableHandler="Class:Xeno.Prodika.Config.SDMFeatureEnabledResolverFactory,PlatformExtensions$EffectiveDate \| 5012" |
| DocumentExpirationDateDisplay | lblExpirationDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" enableHandler="Class:Xeno.Prodika.Config.SDMFeatureEnabledResolverFactory,PlatformExtensions$ExpirationDate \| 5012" |
| DocumentParentCityName | lblCity | |
| DocumentParentCountryName | lblCountryName | |
| DocumentParentName | lblCompanyFacility | |
| DocumentParentPostalCode | lblPostalCode | |
| DocumentRequiredDateDisplay | lblRequiredDate | dataFormatter="Singleton:Xeno.Prodika.EQTService.FormatValueDelegates.ShortDateCharMonthFormatValueDelegateFactory,EQTService" enableHandler="Class:Xeno.Prodika.Config.SDMFeatureEnabledResolverFactory,PlatformExtensions$DueDate \| 5012" |
| ManagedDocSpecSourcedTaxAlias | lblSpecSourcedTax | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.SpecSummaryTaxomonyAliasDataColumnTransformerFactory,EQTService" |
| ManagedDocStatus | lblStatus | enableHandler="Class:Xeno.Prodika.Config.SDMFeatureEnabledResolverFactory,PlatformExtensions$Status \| 5012" |

| Data Field | Data Field Caption | Notes |
|---|---|---|
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$2231_5012" |
| Originator | lblOriginator | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.UserNameDataColumnTransformerFactory,FICService" |
| ParentCompany | lblCompany | dataTransformer="Singleton:EQTModels.BusinessUnitSecurity.BUSecuredParentCompanyNameDataColumnTransformerFactory,EQTModels" |
| ParentFacility | lblFacility | dataTransformer="Singleton:EQTModels.BusinessUnitSecurity.BUSecuredFacilityNameDataColumnTransformerFactory,EQTModels" |
| SpecEquivSourced | lblSpecEquivSourced | |
| SpecNamePlusNum | lblSpecName | |
| SpecNumSourced | lblSpecNumSourced | |

# UGM

## Group

### View: GroupView

### Model: Group Profiles

| Data Field | Data Field Caption | Notes |
|---|---|---|
| CanonicalName | lblGroupCanonicalNameProperty | |
| Description | lblGroupDescriptionProperty | |
| LastUpdatedLookupKey | lblLastUpdated | dataTransformer="Singleton:Xeno.Prodika.Services.PrincipalManagementService.EQT.DataTransformers.LastUpdatedDCTransformerForGroupFactory,PrincipalManagementService" |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$2055" |
| Name | lblGroupNameProperty | |
| GroupStatusDisplay | lblStatus | dataFormatter=?Singleton:Oracle.PLM4P.ReadyReports.Lib.DataFormatters.StatusIntValueFormatterFactory,ReadyReportsLib" |
| RoleNameDisplay | lblGroupRoleNameProperty | isAggregatable="true" |
| TagNameDisplay | lblGroupWorkflowTags | isAggregatable="true" |
| UserNameDisplay | lblGroupUserNameProperty | isAggregatable="true" |

# User

### View: UserView

### Model: User Profiles

| Data Field | Data Field Caption | Notes |
|---|---|---|
| AddressState | lblAddressStateProperty | |
| AffiliateName | lblAffiliateNameProperty | enableHandler="Class:Xeno.Prodika.EQTService.SearchablePropertyHandlers.FeaturePropertyItemEnabledResolverFactory,EQTService$Common.EQT.UserView.AffiliateName.Enabled" |
| CountryNameDisplay | lblUserCountryNameProperty | |
| EmailAddress | lblUserEmailProperty | |
| FacilityName | lblUserFacilityNameProperty | |
| FirstName | lblFirstNameProperty | |
| GroupNameDisplay | lblUserGroupNameProperty | isAggregatable="true" aggregationDelimiter=", " |
| GSMBUDisplay | lblUserGSMBusinessUnits | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.BusinessUnitDataColumnTransformerFactory,EQTService" isAggregatable="true" aggregationDelimiter=", " |
| LastName | lblLastNameProperty | |
| LastUpdatedLookupKey | lblLastUpdated | dataTransformer="Singleton:Xeno.Prodika.Services.PrincipalManagementService.EQT.DataTransformers.LastUpdatedDCTransformerForUserFactory,PrincipalManagementService" |
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$2053" |
| ProperUserName | lblUserFullName | |
| RoleNameDisplay | lblUserRoleNameProperty | isAggregatable="true" aggregationDelimiter=", " |
| SCRMBUDisplay | lblUserSCRMBusinessUnits | dataTransformer="Singleton:Xeno.Prodika.EQTService.DataTransformers.BusinessUnitDataColumnTransformerFactory,EQTService" isAggregatable="true" aggregationDelimiter=", " |
| SegmentName | lblSegmentNameProperty | isAggregatable="true" aggregationDelimiter=", " enableHandler="Class:EQTModels.Common.SegmentPropertyItemWithUserTypeEnabledResolverFactory,EQTModels" |
| Status | lblUserStatusProperty | |
| UserName | lblUserLoginName | |

# WFA

## GSM Workflow Process Template

### View: WorkflowProcessTemplateView

### Model: GSM Workflows

| Data Field | Data Field Caption | Notes |
|---|---|---|
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$5756_GSM" |
| ProcessTemplateDescription | lblDescription | |
| ProcessTemplateName | llblName | |

## PQM Workflow Process Template

### View: WorkflowProcessTemplateView

### Model: PQM Workflows

| Data Field | Data Field Caption | Notes |
|---|---|---|
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$5756_PQM" |
| ProcessTemplateDescription | lblDescription | |
| ProcessTemplateName | llblName | |

## SCRM Workflow Process Template

### View: WorkflowProcessTemplateView

### Model: SCRM Workflows

| Data Field | Data Field Caption | Notes |
|---|---|---|
| MRUWeight | lblMRUWeight | enableHandler="Class:Xeno.Prodika.MRUService.MostRecentlyUsedItemObjectEnabledResolverFactory$5756_SCRM" |
| ProcessTemplateDescription | lblDescription | |
| ProcessTemplateName | llblName | |

# C

# Best Practices

This appendix contains guidelines for using various reporting methods based on common tasks.

## When to use Searching, Reporting, or Printing

| Data Inquiry | Resolution |
|---|---|
| I want would like to search on all of my recently viewed items. | App Searches |
| I need to see all trade specifications in my business unit, and when I use searching in the application I only get 500 to return. | Queued Searches |
| When I am on a NPD project, I would like to have one-click access to all of the associated packaging specifications and their suppliers. | Ready Reports |
| A supplier needs to see all quality issues associated with their company through Supplier Portal. | Custom Report (Reporting UI) |
| I would like to review all incoming product issues, with the ability to drill down in a report to investigate and isolate related issues. | Custom Report – Direct Access |
| Once a quarter, purchasing would like to see all approved specifications by specification type with category and approved supplier. | Custom Report – Scheduled w/ email delivery |
| Supplier needs to view a specification they are approved to supply. | Printing – Supplier Portal |

## Searching vs Reporting vs Printing Scenarios

| Scenario | Recommendation | Skills Needed |
|---|---|---|
| I would like to change specification printouts to emphasize certain data by bolding some items and changing font colors on others. | Update Print Template | XML |
| I would like to create a specification printout viewable by the public that includes a Nutrition Facts Panel. | Create a new BI Publisher report with a PDF output | SQL, BI Publisher knowledge |
| I would like to create a quality report for plant personnel, but I need to restrict the information on the report based on their PLM for Process access. | Create a BI Publisher report utilizing the Reporting UI | SQL, BI Publisher knowledge |

| Scenario | Recommendation | Skills Needed |
|---|---|---|
| I really like the reports in the eQ report packs, but I would like to change the chart types and add our company logo. | Use the same data model and copy and modify the existing report | BI Publisher knowledge |
| I would like for our purchasing group to see all formulations currently in development that are using this material. | Create a ready report | Ready Report |

# Reporting Tools Details

| | Max Results | Custom Layout | Layout Editor | Data Options | Skills Required | Security |
|---|---|---|---|---|---|---|
| **EQT Searches** | 500 | Simple[2] | No | Active Links & Export | XML[3] | App |
| **Ready Reports** | 500[1] | Simple[2] | No | Active Links & Export | XML[3] | App |
| **Queued Searching** | Unlimited[5] | Simple[2] | Yes | Active Links & Export | None | App |
| **Custom Reports (BI Publisher/SSRS)** | Unlimited[5] | Complex | Yes | Highly Interactive | None[4] | Role Based, Custom |
| **Printing** | NA | Complex | No | Static | XSL-FO, XML, and C#[6] | App |

## Notes

1. Max Results over 500 require a performance evaluation.
2. Additional columns only.
3. For adding new columns only.
4. SQL required to develop new data models.
5. Restricted by hardware configuration and/or limitation.
6. For custom handlers only.