

**Oracle® Hospitality Cruise Shipboard Property
Management System**

FCWebServices Technical Specification

Release 7.30.8xx

F10700-02

January 2019

ORACLE®

Copyright © 1995, 2019, Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this software or related documentation is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

Contents

Contents.....	3
Preface	7
Audience	7
Customer Support	7
Documentation	7
Revision History	7
General Overview.....	12
General Process Flow for Check-In Process.....	13
General Process Flow for Passenger Info	14
Passing Date Variable using XML	15
Connections	17
How to use FCWebService with Microsoft .NET.....	17
WebMethod: FidelioSPMSWSJsonGet	18
WebMethod: FidelioSPMSWSJsonPost	24
WebMethod: FidelioSPMSWSXML	28
1. Function: Checkin	30
2. Function: GuestSearch.....	31
4. Function: UpdateGuestInfo	35
5. Function: Version	42
6. Function: SearchPassenger	43
7. Function: SearchPassengerByID	45
8. Function: GetExcursion	47
9. Function: GetEvent	53
10. Function: GetTreatmentAvailability	59
11. Function: GetPackageTreatmentAvailability	61
12. Function: GetExcPackage	63
13. Function: GetExcFolio.....	69
14. Function: GetEvtFolio	72
15. Function: UpdateEmail	76
16. Function: GetCheckImage	77
17. Function: UpdateMessageStatus	78
18. Function: WSFunction	79
19. Function: ExcBooking	80
20. Function: ExcBookingPackage	84
21. Function: EvtBooking	88
22. Function: SpaBooking.....	91

23. Function: SpaBookingPackageRetail	94
24. Function: UpdateInvoiceStatus	96
25. Function: GetMicrosAdvanceDiscount	97
26. Function: GetPackageInfo	98
27. Function: GetCreditCardInfo	100
28. Function: GetAccBalance	102
29. Function: GetFreeCabin	103
30. Function: GetPeopleCount	105
31. Function: ChangeBoardStatus	107
37. Function: AdvanceGuestSearch	109
39. Function: AddRouting	111
40. Function: DeleteRouting	113
41. Function: SearchGangwaylog	115
42. Function: UpdateTravelDoc	118
43. Function: DeleteTravelDoc	120
44. Function: UpdateAmenity	121
45. Function: DeleteAmenity	123
46. Function: UpdateSpecialRequest	124
47. Function: DeleteSpecialRequest	125
48. Function: UpdateWorkOrder	126
49. Function: DeleteWorkOrder	128
50. Function: UpdateCompleteStatus	129
51. Function: UpdateDayNeeded	130
52. Function: UpdateWorkOrderItem	131
53. Function: DeleteWorkOrderItem	132
54. Function: UpdateWorkOrderAssignment	133
55. Function: DeleteWorkOrderAssignment	134
56. Function: UpdateCabCleanStatus	135
60. Function: SearchWorkOrder	136
61. Function: CheckCabinAvailable	140
62. Function: Login	141
63. Function: Logout	143
64. Function: ChangePassword	144
65. Function: AmenityCompleted	145
66. Function: UndoAmenityCompleted	146
67. Function: SpecialRequestCompleted	147
68. Function: UndoSpecialRequestCompleted	148
69. Function: UpdateCreditCardInfo	149

71. Function: MarkAssignmentStatus	152
72. Function: MarkSingleAssignmentStatus	153
74. Function: GetAdvanceLoyaltyDiscount.....	154
78. Function: UpdateCabState	155
79. Function: SearchCabin.....	156
80. Function: SearchCrashCabin.....	160
81. Function: SearchHouseKeeping.....	161
82. Function: GetHouseKeepingSections	169
83. Function: SearchAmenity.....	171
84. Function: SearchSpecialRequest.....	176
85. Function: RetrievePage	180
86. Function: MessageSend	181
87. Function: MessageRead	182
88. Function: MessageDelete	184
89. Function: MessageSetRead	185
90. Function: AddHKTask.....	186
91. Function: SearchHKForecast.....	187
92. Function: UpdateTravelDocAdvance	190
93. Function: FCUIGuestInquiry	193
94. Function: FCUIPosting.....	205
95. Function: SearchComment.....	214
96. Function: DeleteComment	218
97. Function: DeleteResolution	219
98. Function: UpdateComment.....	220
100. Function: UpdatePromoterStatus	223
101. Function: UpdateWorkOrderImage.....	224
102. Function: DeleteWorkOrderImage.....	225
103. Function: PurchasePackage	226
107. Function: UpdateCreditLimit	227
108. Function: UpdatePostingStatus	228
109. Function: GETRFIDEncodingData.....	229
110. Function: UpdateRFIDEncoded	231
111. Function: RegisterRfidBoardCard	232
113. Function: GetLuggageInfo	233
114. Function: UpdateLuggageLink.....	236
115. Function: DeleteLuggageLink.....	237
117. Function: RegisterRfidBoardCardQuery	238
118. Function: DeactivateCreditCard.....	239

119. Function: MarkAsNoShow	240
121. Function: FCUIPayment.....	241
122. Function: UpdateGuestMessage.....	244
123. Function: DeleteGuestMessage.....	245
131. Function: ActivateCreditCard	246
132. Function: UpdateCrewPinCode.....	247
133. Function: ValidateCrewPinCode.....	248
134. Function: GetPreviousClockInOutActivities	249
135. Function: ClockInOutGetStatus.....	250
136. Function: ApproveCrewWorkedHoursDaily	251
137. Function: ClockInMobile	252
138. Function: ClockOutMobile	253
139. Function: GetILOViolations.....	254
142. Function: GetTreatmentGroupsForLocation	255
145. Function: SearchCntrAssgn.....	256
146. Function: SearchPayrolls.....	259
147. Function: QueryCrewInvoice	261
148. Function: PayCrewInvoice	262
150. Function: CheckSag	263
151. Function: GetSeatingZoneAvailability	264
152. Function: GangwayGuestSearch	266

Preface

This document provides an explanation and description of each of the exposed functions in the Oracle Hospitality Cruise Shipboard Property Management System (SPMS) Web Service.

Audience

This document is intended for:

- Third Party vendors who wish to integrate with SPMS.
- This document should be used as a technical reference for external parties to develop applications which require interfacing to SPMS.

Customer Support

To contact Oracle Customer Support, access My Oracle Support at the following URL:

<https://support.oracle.com>

When contacting Customer Support, please provide the following:

- Product version and program/module name
- Functional and technical description of the problem (include business impact)
- Detailed step-by-step instructions to re-create
- Exact error message received
- Screen shots of each step you take

Documentation

Oracle Hospitality product documentation is available on the Oracle Help Center at
<http://docs.oracle.com/en/industries/hospitality/>

Revision History

Version	Date	Description
7.30.846	18-Jul-2013	First released specifications.
7.30.846	31-Jul-2013	TTP15516 - SearchHouseKeeping - enhanced to return delta only
7.30.847	6-Aug-2013	TTP14608 - add overweight booking handling capabilities, New Field pnWeight for ExcBooking and ExcBookingPackage
7.30.947	15-Aug-2013	TTP16542 - WS SearchHKForecast - change to scd arrive time for debark date in RESERV table

Version	Date	Description
7.30.847	28-Aug-2013	<p>TTP16557 – WS SearchHouseKeeping – added HAS_COMPLETEDDATE to TASKS table output</p> <p>TTP16276 – WS MessageRead – new field to be returned, TAMS_EXTERNALID</p>
		<p>TTP16639 - WS SearchHouseKeeping - sorting enhancement with additional parameters to display completed/non-completed tasks</p> <p>3 additional parameters to be passed in pbShowAllIncompleteTasks, pbShowAllCompletedTasksToday pbUseOldSorting</p>
7.30.847	2-Sep-2013	TTP16639 – WS SearchHouseKeeping – new parameter pbSortByCabinsOnly to be passed in
7.30.848	2-Sep-2013	Add psOperationPosition for SearchComment
7.30.848	3-Sep-2013	<p>Add pbIncludePicture, pnSortModDateAsc to SearchWorkOrder, add MWR_XDOC_ID on SearchWorkOrder response data</p> <p>Add UpdatePromoterStatus</p>
7.30.848	4-Sep-2013	CPL_DONE should be CPL_RES_DONE for SearchComment, Add pbIncludePicture for SearchComment, change the return result when paging is in use, this is to make sure all same link id is return and not partial
7.30.848	23-Sep-2013	Add pnAcc to SearchComment
7.30.848	24-Sept-2013	Add all available AME & SRT fields into the dataresult for SearchAmenity & SearchSpecialRequest.
		<p>New fields added for SearchAmenity included: AME_ID, AME_AMOUNT, AME_COMMENTS, AME_COST, AME_CREATED_BY, AME_CREATED_DATE, AME_CURR_ID, AME_EXT_CODE, AME_EXT_ID, AME_FLG, AME_MESSAGE, AME_MODDATE, AME_NOTE, AME_OCCURRENCE, AME_QUANTITY, AME_RESBOOKNR, AME_RESID, AME_SENDER1, AME_SENDER2, AME_V_GUESTID, AME_VID</p>
		<p>New fields added for SearchSpecialRequest included: SRT_ID, SRT_CREATED_BY, SRT_DATE_CREATED, SRT_DESCR, SRT_EVENTDATE, SRT_EXT_ID, SRT_MODDATE, SRT_QUANTITY, SRT_RESID, SRT_VID</p>
7.30.848	2-Oct-2013	Add sample calling all message 91 to 98

Version	Date	Description
7.30.848	2-Oct-2013	TTP16852 – WS SearchHousekeeping & SearchHKForecast, fix crash cabins
7.30.849	3-Oct-2013	Add pnHeight, pbAllowWaitList to ExcBooking and ExcBookingPackage
7.30.849	8-Oct-2013	Add sample JSON code for FCUIPosting
7.30.850	25-Nov-2013	Add Work Order Image for SearchWorkOrder Add UpdateWorkOrderImage and DeleteWorkOrderImage
7.30.850	8-Dec-2013	Add pbyEncTrack1, pbyEncTrack2, pbyEncTrack3, psDeviceSerial, psKSN for UpdateCreditCardInfo
7.30.850	9-Dec-2013	TTP17284 - Priority cabins to be displayed as rush cabins for WS SearchHouseKeeping function
7.30.854	4-Apr-2014	Add psToken for UpdateCreditCardInfo
7.30.855	23-May-2014	Add handling to prevent some function to run on QCI Sync offline DB Add peSearchType for DeleteRounting Add new function UpdateCreditLimit and UpdatePostingStatus Add pnParticipant for ExcBooking and ExcBookingPackage Update FCUIPosting gsItemDetail field
7.30.855	29-May-2014	Add new function RegisterRfidBoardCard
8.0.000	16-Jun-2014	Add new function GetLuggageInfo, UpdateLuggageLink, DeleteLuggageLink
7.30.857	3-Aug-2014	Add 4 news enum to GuestSearch function reservation type Add pbAssignInvoice1, pbAssignInvoice2, pbAssignInvoice3, pbAssignInvoice4 to UpdateCreditCardInfo Add new function DeactivateCreditCard, MarkAsNoShow, FCUIPayment, UpdateGuestMessage, DeleteGuestMessage Add 5 new parameters for GetFreeCabin, add 3 additional fields for the return result Add ux_p_h_email2 update field to UpdateGuestInfo
7.30.857	22-Jul-2014	MessageRead function - Added 3 new fields to return (XDOC fields)
7.30.858	13-Aug-2014	Add new field psReason for UpdateGuestInfo Delete psUniqueID from SpaBooking
7.30.858	19-Aug-2014	SearchCabin function – additional fields to return

Version	Date	Description
7.30.859	3-Oct-2014	Add peOnboardStatus for GuestSearch and AdvanceGuestSearch Add new function ActivateCreditCard Add 2 new parameters for UpdateCreditCard Allow update res_remarks2 field in UpdateGuestInfo
7.30.861	5-Nov-2014	Change UpdateGuestInfo to support add new record and also allow update more field Function GetSPATreatmentAvailability should be GetTreatmentAvailability
8.0.000	24-Nov-2014	Add the ability to search by Cabin for GetLuggageInfo
7.30.862	25-Nov-2014	Change UpdateGuestInfo to support update of uxpx_h_staff_div and uxpx_h_staff_pos, uxpx_c_bookno, uxpx_c_bkdate, uxpx_c_bkpassex, uxpx_c_bkpasspi,uxpx_c_bkpasspi_country
7.30.863	15-Dec-2014	Add new function UpdateCrewPinCode and ValidateCrewPinCode, GetPreviousClockInOutActivities, ApproveCrewWorkedHoursDaily, ClockInMobile, ClockOutMobile
7.30.864	17-Dec-2014	Add new function GetILOViolations
7.30.8xx	24-Dec-2014	psGuestLastName in SearchAmenity and SearchSpecialRequest should be String not Array of String FCUIGuestInquiry->peSearchType 11 and 12 is wrong
7.30.864	5-Jan-2015	WS ClockInOutGetStatus – add field TARS_ID
7.30.864	8-Jan-2015	Return the spa_id for SpaBooking
7.30.865	20-Jan-2015	Enhanced GetTreatmentAvailability function to allow optional Starting and Ending Date in order to return availability time slots for requested period when pnAccID parameter is set to 0
7.30.866	13-Feb-2015	Add new function GetRFIDEncodingData and UpdateRFIDEncoded
7.30.866	14-Feb-2015	Add new functions GetPackageTreatmentAvailability and SpaBookingPackageRetail Update SpaBooking function to include PackageID and PackageControlNo and to also return spa_control.
7.30.867	02-Mar-2015	Add new function GetTreatmentGroupsForLocation
8.0.000	20-May-2015	Add new field psSearchType for UpdateLuggageLink Added psSeachLevel = 3
7.30.868	20-May-2015	Add uxpx_a_othfstn update field to UpdateGuestInfo Allow update picture only for UpdateGuestInfo

Version	Date	Description
7.30.868	24-Jun-2015	Added "SearchCntrAssgn", "SearchPayrolls", "QueryCrewInvoice" and "PayCrewInvoice" to standard web service function call.
7.30.868	24-Jun-2015	Added sCrewInvoice to CResponseJson
8.0.000	21-Jul-2015	Change Login function
7.30.870	13-Nov-2015	Add UXP_C_EXTERNALID for peSearchType in FCUIGuestInquiry Add sObj to CResponseJson Add CheckSag function, this function exists long ago, just not documented
7.30.875	23-Jan-2018	Updated the UpdateGuestInfo Function, amended the correct parameter Request / Optional
7.30.8771	11-Jun-2018	Added credit card currency parameter Request as optional field in UpdateCreditCardInfo Function (HCSP-5676)
7.30.879	31-Jan-2019	Revised the description of FCUIGuestInquiry return array of GuestInfor when success.

General Overview

The document provides an explanation and description of each of the exposed functions available in FCWebService and is used as Technical Reference by third-party vendors who wish to develop applications which interface with Oracle Hospitality Cruise Shipboard Property Management System (SPMS).

All web messages are based on Extensible Markup Language (XML) format, JavaScript Object Notation (JSON) or JSON with Padding (JSONP), and examples provided here are based on Microsoft Visual Studio 2008. Access to the web service through other programming language is possible, but SPMS will not provide any assistance on this.


All JSON date type are passed in as STRING with format YYYYMMDDHHMMSS
For example, 2011-01-14 3:14PM = 20110114151400

If the input type is JSON objects, this need to be pass in as *string serializes* as JSON string.
If the input type is ByteArray, this need to be passed in as *base64 string serializes* as JSON string.

General Process Flow for Check-In Process

1. Call the **GuestSearch** function to return a list of guests.
2. For further action on each guest, following functions may be used: **UpdateGuestInfo**, **CheckIn**.


The **UpdateGuestInfo** function must be called before the **CheckIn** function. Once the **CheckIn** is called, then you need to call the **GuestSearch** again before calling **UpdateGuestInfo**.

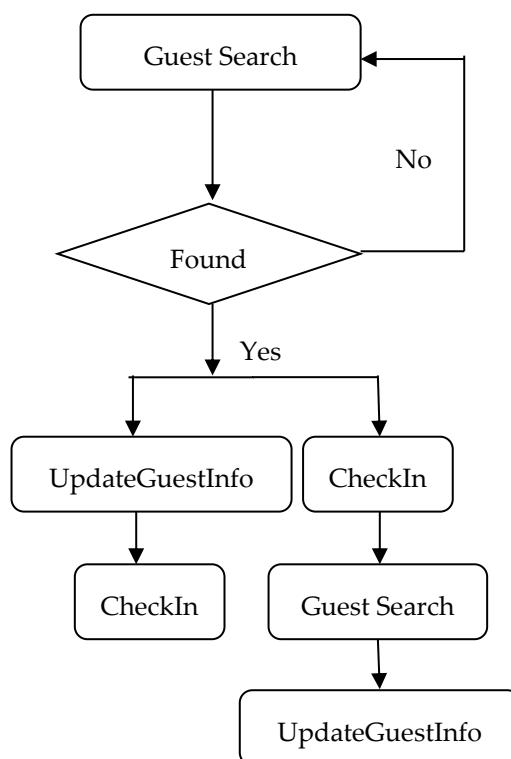

General Process Flow for Passenger Info

1. Call the **SearchPassenger** function to return one guest.
2. This saves the Unique Guest Id into a local device as a cookie for the web so that it doesn't need to perform the **SearchPassenger** function again. However,, it needs to check the expiry date of the saved information against the disembarkation date.

You may use the Unique Guest Id to perform the **GuestPicture**, **GetInvoiceTotal**, **GetItinerary**, **GetPromo** function.

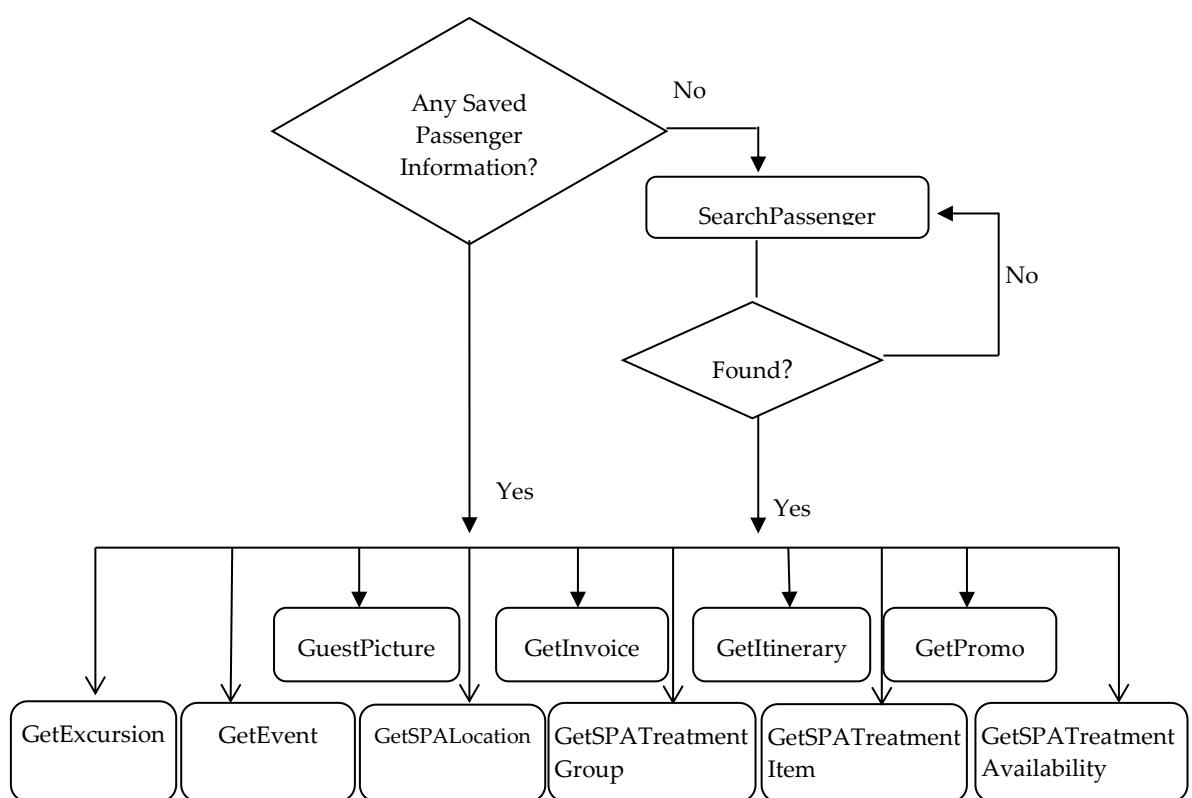

Passing Date Variable using XML

By default, the XML Serialize Date is in a format which includes time zone information, and if the server is in Florida TZ-5 and the caller is at Malaysia TZ+8, the value pass to web service is shown in below example.

This value pass from Malaysia to Florida Server 2011-12-11T04:30:38.0946974+08:00

The Server de-serialize the date to “2011-12-10 3:36pm” as there is 13 hours difference between Malaysia and Florida. If you want to preserve the date and time, you need to make sure the XML Serialize the date to below format:

2011-12-11T04:30:38.0946974

For the dataset, below is the method used to ensure the date/time remains the same between the time zones.

```
For Each oTable In oResponse.oDataSet.Tables
    For nX = 0 To oTable.Columns.Count - 1
        If oTable.Columns(nX).DataType.ToString = "System.DateTime"
        Then
            oTable.Columns(nX).DateTimeMode =
            DataSetDateTime.Unspecified
        End If
    Next
Next
```

Below is the code used to ensure the class which has date field will serialize without time zone. There is another way to perform this but we understand many classes had been written long before, and we do not have to go to individual class to make the changes. This function *does not* support properties with an additional parameter, it also *does not* support multi-dimension array.

```
Private Sub RemoveTimeZone(ByVal poObject As Object)
    Dim oType As System.Reflection.PropertyInfo
    Dim oField As System.Reflection.FieldInfo

    For Each oType In poObject.GetType.GetProperties
        Try
            If oType.PropertyType.IsArray Then
                Call RemoveArrayTimeZone(oType.GetValue(poObject, New Object() {}))
            ElseIf oType.PropertyType.Name = "DateTime" Then
                oType.SetValue(poObject,
                DateTime.SpecifyKind(oType.GetValue(poObject, New Object() {}),
                DateTimeKind.Unspecified), New Object() {})
            End If
        Catch ex As Exception
```

```

        End Try
    Next
    For Each oField In poObject.GetType.GetFields
        Try
            If oField.FieldType.IsArray Then
                Call RemoveArrayTimeZone(oField.GetValue(poObject))
            ElseIf oField.FieldType.Name = "DateTime" Then
                oField.SetValue(poObject,
DateTime.SpecifyKind(oField.GetValue(poObject),
DateTimeKind.Unspecified))
            End If
        Catch ex As Exception

            End Try
        Next
    End Sub

    Private Sub RemoveArrayTimeZone(ByVal poObject As Object)
        Dim nX As Integer

        If poObject(0).GetType.ToString = "DateTime" Then
            For nX = 0 To poObject.Length - 1
                poObject(nX) = DateTime.SpecifyKind(poObject(nX),
DateTimeKind.Unspecified)
            Next
        ElseIf poObject(0).GetType.IsClass = True Then
            For nX = 0 To poObject.Length - 1
                Call RemoveTimeZone(poObject(nX))
            Next
        End If
    End Sub

```

Below is the code used for normal date variable:

```

Dim gdCheckOpenDateTime as Date

gdCheckOpenDateTime = DateTime.SpecifyKind(Now(),
DateTimeKind.Unspecified)

```

Connections

The Microsoft IIS is used to provide the Web Service. Thus this document assumes the reader is familiar on how to access the Web Service function.

How to use FCWebService with Microsoft .NET

1. Add a **Web Reference** for Web Service in your application. For example, named web reference as **FidelioSPMSWS**.
2. Add a variable reference to the Web Service reference like *Public goWs As New FidelioSPMSWS.FidelioSPMSWSSoapClient*.
3. With the above in place, you can then call the available web methods. For example,
 - a. **goWs.FidelioSPMSWSJsonGet()**.
 - b. **goWs.FidelioSPMSWSJsonPost()**.
 - c. **goWs.FidelioSPMSWSXML()**.

WebMethod: FidelioSPMSWSJsonGet

This web method function support JSON get and JSONP get, it *does not* support JSON post.

Parameter	Type	Description	Required
psFunction	String	Function to call	✓
psSessionID	String	Session ID	✓
psParam	Array of String	The field value will depend on the Function, please refer to function detail for each available parameters	Optional

The following section is the description of the parameters.

psFunction

The ‘psFunction’ is a function used to retrieve the available functions listed in the next section.

psSessionID

The SessionID is a unique ID given by SPMS to call the login function. This field is required for all functions call *except* login function.

The session has a timeout of *60 minutes* from the last function call and value can be changed in *web.config*.

```
<add key="Idle Timeout" value="60"/>
```

When a function is called and it returns below error, you *must* perform another function call, then login again and retry

```
Const SESSIONEXPIRY = "Session Expired"  
Const INVALIDSESSIONID = "Invalid Session ID or Session Expiry"
```

When you call a function and it returns below error, you *must* change the password and retry

```
Const PLEASECHANGEPASSWORD = "Please change your password first"
```

poParam

The field value depends on the Function, please refer to function detail for each available parameter.

Return Value

Will return the below Class, bSuccess will use to determine if the function is successful or fail. If fail, sErrMsg will be populated with the error message. All other field will depend on the function call.

```
Public Class CResponseJson
    Public bSuccess As Boolean
    Public sErrMsg As String
    Public sTables As String
    Public nTotalPage As Integer
    Public sPackageInfo As String
    Public sCrewInvoice As String
    Public sObj As String
End Class
```

Note:

- oDataSet, oPassenger, oGuestInfo, oGuest and oAdvanceLoyalty will be serialized to sTables.
 - oPackageInfo will be serialize to sPackageInfo.
 - oCrewInvoice will be serialized to sCrewInvoice.
 - oObj will be serialize to sObj and sTables
 - If oDataSet, oPassenger, oGuestInfo, oGuest and oAdvanceLoyalty is Nothing, this is for backward compatible)
-

Sample JSONP

The requirement is you must pass in the *callback* and *format=json* parameter.

```
GET
/FCWebServices/FCWebServices.asmx/FidelioSPMSWSJsonGet?callb
ack="Testing"&psFunction='WSFunction'&psSessionID='SessionID'
'&psParam=['GetCabin','05002']&format=json HTTP/1.0
Host: localhost
```

Or

[http://localhost/FCWebServices/FCWebServices.asmx/FidelioSPMSWSJsonGet?callback="Testing"&psFunction='WSFunction'&psSessionID='SessionID'&psParam=\['GetCabin','05002'\]&format=json](http://localhost/FCWebServices/FCWebServices.asmx/FidelioSPMSWSJsonGet?callback=)

Below is the sample response that return 2 tables and the text in red represent the second table.

Note: The Testing() is a JSONP response.

```
Testing({ "bSuccess":true, "sErrMsg": "", "sTables": " {
    "Table1": {
        "CAB_ID": "05002",
        "CAB_DECK": "D05"
    }
}
```

```
"DECK_DESC": "DECK 05",
"CAB_DESIGN": "P",
"CAB_TYPE": "CD4      ",
"TYPE_DESC": "CD4 - O/C Porthole (D4, D5, D6)",
"CAB_STATION": "B      ",
"MST_NAME": "ASSEMBLY STATION B",
"CAB_MODDATE": "2011-10-27T10:26:43"
},
"Table2": [
{
  "TYP_ART": "D00      ",
  "TYP_COMMENT": "SEAT 1"
},
{
  "TYP_ART": "D02      ",
  "TYP_COMMENT": "DECK 02"
},
{
  "TYP_ART": "D03      ",
  "TYP_COMMENT": "DECK 03"
},
{
  "TYP_ART": "D04      ",
  "TYP_COMMENT": "DECK 04"
},
{
  "TYP_ART": "D05      ",
  "TYP_COMMENT": "DECK 05"
},
{
  "TYP_ART": "D06      ",
  "TYP_COMMENT": "DECK 06"
},
{
  "TYP_ART": "D07      ",
  "TYP_COMMENT": "DECK 07"
},
{
  "TYP_ART": "D08      ",
  "TYP_COMMENT": "DECK 08"
},
{
  "TYP_ART": "D09      ",
  "TYP_COMMENT": "DECK 09"
},
{
  "TYP_ART": "D10      ",
  "TYP_COMMENT": "DECK 10"
}
```

```

        },
        {
            "TYP_ART": "D11      ",
            "TYP_COMMENT": "DECK 11"
        },
        {
            "TYP_ART": "D12      ",
            "TYP_COMMENT": "DECK 12"
        },
        {
            "TYP_ART": "D88      ",
            "TYP_COMMENT": "PAX TEMP CABIN"
        },
        {
            "TYP_ART": "D99      ",
            "TYP_COMMENT": "CREW TEMP CABIN"
        }
    ]
} }) ;

```

Sample JSON

The requirement is you must pass in the *format=JSON* parameter

```

GET
/FCWebServices/FCWebServices.asmx/FidelioSPMSWSJsonGet?psFunction='WSFunction'&psSessionID='SessionID'&psParam=['GetCabin','05002']&format=JSON HTTP/1.0
Host: localhost

```

Or

[http://localhost/FCWebServices/FCWebServices.asmx/FidelioSPMSWSJsonGet?psFunction='WSFunction'&psSessionID='SessionID'&psParam=\['GetCabin','05002'\]&format=JSON](http://localhost/FCWebServices/FCWebServices.asmx/FidelioSPMSWSJsonGet?psFunction='WSFunction'&psSessionID='SessionID'&psParam=['GetCabin','05002']&format=JSON)

Below is the sample response that return 2 tables and the text in red represent the second table.

```

{"bSuccess":true,"sErrMsg":"","sTables":{
    "Table1": {
        "CAB_ID": "05002",
        "CAB_DECK": "D05      ",
        "DECK_DESC": "DECK 05",
        "CAB_DESIGN": "P",
        "CAB_TYPE": "CD4      ",
        "TYPE_DESC": "CD4 - O/C Porthole (D4, D5, D6)",
        "CAB_STATION": "B      ",
        "MST_NAME": "ASSEMBLY STATION B",
        "CAB_MODDATE": "2011-10-27T10:26:43"
    }
}}

```

```
},
"Table2": [
{
    "TYP_ART": "D00      ",
    "TYP_COMMENT": "SEAT 1"
},
{
    "TYP_ART": "D02      ",
    "TYP_COMMENT": "DECK 02"
},
{
    "TYP_ART": "D03      ",
    "TYP_COMMENT": "DECK 03"
},
{
    "TYP_ART": "D04      ",
    "TYP_COMMENT": "DECK 04"
},
{
    "TYP_ART": "D05      ",
    "TYP_COMMENT": "DECK 05"
},
{
    "TYP_ART": "D06      ",
    "TYP_COMMENT": "DECK 06"
},
{
    "TYP_ART": "D07      ",
    "TYP_COMMENT": "DECK 07"
},
{
    "TYP_ART": "D08      ",
    "TYP_COMMENT": "DECK 08"
},
{
    "TYP_ART": "D09      ",
    "TYP_COMMENT": "DECK 09"
},
{
    "TYP_ART": "D10      ",
    "TYP_COMMENT": "DECK 10"
},
{
    "TYP_ART": "D11      ",
    "TYP_COMMENT": "DECK 11"
},
{
    "TYP_ART": "D12      ",
```

```
        "TYP_COMMENT": "DECK 12"
    },
{
    "TYP_ART": "D88      ",
    "TYP_COMMENT": "PAX TEMP CABIN"
},
{
    "TYP_ART": "D99      ",
    "TYP_COMMENT": "CREW TEMP CABIN"
}
]
}").
```

WebMethod: FidelioSPMSWSJsonPost

This web method function supports JSON post only. It does not support JSON get and JSONP get.

Parameter	Type	Description	Required
psFunction	String	Function to call	✓
psSessionID	String	Session ID	✓
psParam	Array of String	The field value will depend on the Function, please refer to function detail for each available parameters	Optional

The following is a description of the parameters.

psFunction

The 'psFunction' is a function used to retrieve the available functions listed in the next section.

psSessionID

The SessionID is a unique ID given by SPMS to call the login function. This field is required for all functions call *except* login function.

The session has a timeout of *60 minutes* from the last function call and value can be changed in *web.config*.

```
<add key="Idle Timeout" value="60"/>
```

When a function is called and it returns below error, you *must* perform another function call, then login again and retry

```
Const SESSIONEXPIRY = "Session Expired"  
Const INVALIDSESSIONID = "Invalid Session ID or Session Expiry"
```

When you call a function and it returns below error, you *must* change the password and retry

```
Const PLEASECHANGEPASSWORD = "Please change your password first"
```

poParam

The field value depends on the Function, please refer to function detail for each available parameter.

Return Value

Will return the below Class, bSuccess is used to determine if the function is successful or fail. If fail, sErrMsg will be populated with the error message. All other field will depend on the function call.

```
Public Class CResponseJson
    Public bSuccess As Boolean
    Public sErrMsg As String
    Public sTables As String
    Public nTotalPage As Integer
End Class
```

Note: oDataSet, oPassenger, oGuestInfo and oObj will be serialize to sTables.

Sample JSON

The requirement is you must pass in the *Content-Type: application/json; charset=utf-8*

```
POST /FCWebServices/FCWebServices.asmx/FidelioSPMSWSJsonPost
HTTP/1.0
Host: localhost
Content-Type: application/json; charset=utf-8
Content-Length: 69

{psFunction:'WSFunction',psSessionID:'SessionID',psParam:['GetCabin','05002']}
```

Below is the sample response that return 2 tables and the text in red represent the second table.

```
{"bSuccess":true,"sErrMsg":"","sTables":{
    "Table1": {
        "CAB_ID": "05002",
        "CAB_DECK": "D05",
        "DECK_DESC": "DECK 05",
        "CAB DESIGN": "P",
        "CAB_TYPE": "CD4",
        "TYPE_DESC": "CD4 - O/C Porthole (D4, D5, D6)",
        "CAB_STATION": "B",
        "MST_NAME": "ASSEMBLY STATION B",
        "CAB_MODDATE": "2011-10-27T10:26:43"
    },
    "Table2": [
        {
            "TYP_ART": "D00"
        }
    ]
}}
```

```
        "TYP_COMMENT": "SEAT 1"
    },
{
    "TYP_ART": "D02      ",
    "TYP_COMMENT": "DECK 02"
},
{
    "TYP_ART": "D03      ",
    "TYP_COMMENT": "DECK 03"
},
{
    "TYP_ART": "D04      ",
    "TYP_COMMENT": "DECK 04"
},
{
    "TYP_ART": "D05      ",
    "TYP_COMMENT": "DECK 05"
},
{
    "TYP_ART": "D06      ",
    "TYP_COMMENT": "DECK 06"
},
{
    "TYP_ART": "D07      ",
    "TYP_COMMENT": "DECK 07"
},
{
    "TYP_ART": "D08      ",
    "TYP_COMMENT": "DECK 08"
},
{
    "TYP_ART": "D09      ",
    "TYP_COMMENT": "DECK 09"
},
{
    "TYP_ART": "D10      ",
    "TYP_COMMENT": "DECK 10"
},
{
    "TYP_ART": "D11      ",
    "TYP_COMMENT": "DECK 11"
},
{
    "TYP_ART": "D12      ",
    "TYP_COMMENT": "DECK 12"
},
{
    "TYP_ART": "D88      ",
```

```
        "TYP_COMMENT": "PAX TEMP CABIN"
    },
    {
        "TYP_ART": "D99      ",
        "TYP_COMMENT": "CREW TEMP CABIN"
    }
]
}"}
```

WebMethod: FidelioSPMSWSXML

This web method function only supports SOAP.

Parameter	Type	Description	Required
psFunction	String	Function to call	✓
psSessionID	String	Session ID	✓
poParam	Array of Object	The field value will depend on the Function, please refer to function detail for each available parameters	Optional

The following is a description of the parameters.

psFunction

The ‘psFunction’ is a function used to retrieve the available functions listed in the next section.

psSessionID

The SessionID is a unique ID given by SPMS to call the login function. This field is required for all functions call *except* login function.

The session has a timeout of *60 minutes* from the last function call and value can be changed in *web.config*.

```
<add key="Idle Timeout" value="60"/>
```

When a function is called and it returns below error, you *must* perform another function call, then login again and retry

```
Const SESSIONEXPIRY = "Session Expired"  
Const INVALIDSESSIONID = "Invalid Session ID or Session Expiry"
```

When you call a function and it returns below error, you *must* change the password and retry.

```
Const PLEASECHANGEPASSWORD = "Please change your password first"
```

Please make sure you change the *app.config* in order for this to work.

```
<readerQuotas maxDepth="32" maxStringContentLength="100000"  
maxArrayLength="16384"
```

poParam

The field value will depend on the Function, please refer to function detail for each available parameter.

Return Value

Will return the below Class, bSuccess will use to determine if the function success or fail. If fail, sErrMsg will be populated with the error message. All other field will depend on the function call.

```
Public Class CResponseXml
    Public bSuccess As Boolean
    Public sErrMsg As String
    Public oTables() As DataTable
    Public oPassenger As CPassenger
    Public oGuestInfo() As CiPos.iGuestInfo
    Public oObj As Object
    Public oPeopleCount As CFCSecurity.PeopleCount
    'TTP7731 - Change the ISL to support Micros Symphony
    Public oAdvanceLoyaltyDiscount As
        CiPos.CAdvanceLoyaltyDiscount
    Public nTotalPage As Integer
End Class
```

For example,

```
Public goWS As New FidelioSPMSWS.FidelioSPMSWSSoapClient

Dim oResponse As FidelioSPMSWS.CResponseXml

oResponse = goWS.FidelioSPMSWSXML("WSFunction", "Session", New
Object() {"GetCabin", "05002"})
```

1. Function: Checkin

This function will check in the expected guest into the SPMS.

psFunction="CheckIn", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	SPMS Guest Unique ID	✓

The following is a description of the parameters.

pnAccID

This is the SPMS Guest Unique ID, this value can be retrieved via GuestSearch function.
The field name is uxP_a_id.

Return Value

CResponseXml.bSuccess = True when check-in is successful
CResponseXml.bSuccess = False when check-in has failed

Returns *True* when check-in is successful

Returns *False* when check-in has failed

Note:

The *UpdateGuestInfo* must be called before the *CheckIn* function. This is because the *CheckIn* function will also update the guest record and may overwrite any previous updates.

If a *CheckIn* is called before *UpdateGuestInfo*, another call to *GuestSearch* must be made again before an update is allowed.

For example,

```
oResponse = goWS.FidelioSPMSWSXML("CheckIn", "SessionID", New  
Object() {12345})
```

2. Function: GuestSearch

This function search for a guest with various criteria from the SPMS.

psFunction="GuestSearch", below is the list of psParam or poParam

Parameter	Type	Description	Required
psSearchStr	String	Search Criteria	✓
pdDate	Date	Embarkation Date	✓
peGuestType	GuestType	Guest Type Enumerator	✓
peReservationType	ReservationType	Reservation Type Enumerator	✓
pbUseSearchType	Boolean	True-Use specific search type False-Use only Search Criteria	✓
peSearchType	SearchType	SearchType Enumerator	✓
pnScdID	Integer	Current Port ID	optional
peOnboardStatus	OnboardStatus	– All – Onboard – Shoreside	optional

The following is a description of the parameters.

psSearchStr

This is the search criteria, supported values as shown below:-

Cabin number

Guest Name

Board Card Track 2 (Note: must include ";" and "?") for example, ;9841000241243900?

Credit Card Track Data (Note: must include start and end sentinel, for example, ";" and "?")

Cabin List (Separate by ",") for example, 05002,05000

Passport Number

Name List (Last Name separate by ",")

Booking Number

pdDate

Embarkation date, if you want to search for all guest regardless of the embarkation date, pass in #12:00:00AM#

peGuestType Enumerator

Guest 0 → Search guest matching search criteria

Crew	1	→ Search crew matching search criteria
Visitor	2	→ Search visitor matching search criteria
All	3	→ Search guest,crew,visitor matching search criteria

peReservationType Enumerator

Reserve = Search only passenger with reservation status only (Note visitor always have reservation status only)

Reserve	0	→ Reservation passenger
CheckIn	1	→ Search only passenger that had check-in
All	2	→ Search both check-in and reserve passenger
CheckOut	3	→ Search check-out passenger only
ReserveFCManagement	4	→ Reservation passenger, for shore viewer
CheckInFCManagement	5	→ Search only passenger that had check-in, for shore viewer
CheckOutFCManagement	6	→ Search check-out passenger only, for shore viewer
Cancelled	7	→ Cancelled reservation passenger.
AQCIWizardCheckIn	8	→ Use by AQCI Wizard Only
AQCIWizardRegister	9	→ Use by AQCI Wizard Only
ReserveExcludeNoShow	10	→ Reservation passenger excluding No Show
NoShow	11	→ No Show Passenger only

pbUseSearchType

True - Use specific search type, search type is normally used to return the same group of guest for example,

- Search using passport number; function will return list of guests staying in the same cabin
- Search using credit card number; function will return list of guests staying in the same cabin.
- Want to return a specific guest using upx_a_id (SPMS unique key) value.

Below is an *incorrect* use of search type:-

Search by name; In general, there could be more than one guest with the same name, if this happens then the function will search for the first guest in SPMS database that matches the name criteria and returns the list of guests staying in that same cabin. Since this is based on the first found record and returns the list of names based on that, this may not be accurate.

False - Use only Search Criteria

peSearchType Enumerator

SamePartialName = 0

-
1. This only works when search criteria (psSearchStr) passed in is the last name, board card track 2 or credit card track data.
 2. The psSearchStr is the partial last name, it will search for guest with matching the partial last name.
 3. The psSearchStr is board card track 2 or credit card track data, it will search using the supplied info. When there are records found, it will take the first record last name and search again for all guest with the same partial last name.
 4. If the search criterial is other than the 3 above, it will only return the first record matching the search criteria.

SameSurname = 1

1. It will search using the supplied info. When there are records found, it will take the first record last name and search again for all guest with the same last name.
2. However, if the first record last name is blank, it will only return the first record.

NameList = 2

1. If the search criteria passed in is a list of last names separated by “,”, it will search for guests matching the partial last names in the list.
2. The psSearchStr is partial last name, it will search for guest matching the partial last name
3. The psSearchStr is board card track 2 or credit card track data, it will search using the supplied info. When there are records found, it will take the first record last name and search again for all guests with the same partial last name.
4. For other search criteria, it will search using the supplied info.

SameCabin = 3

1. It will search using the supplied info. When there are records found, it will take the first record cabin number and search again for all guests with the same cabin number.
2. However,, if the first record cabin number is blank, it will only return the first record.

SameCabinList = 4

1. If the search criteria passed in is a list of cabin numbers separate by “,”, it will search for all guests matching the cabin number in the list.
2. The psSearchStr is cabin number, it will search for all guests matching the cabin number
3. For other search criteria, it will search using the supplied info.

SameBookingNo = 5

1. It will search using the supplied info. When there are records found, it will take the first record booking number and search again for all guest with the same booking number.
2. However,, if the first record booking number is blank, it will only return the first record.

SameGroupNo = 6

1. It will search using the supplied info. When there are records found, it will take the first record group number and search again for all guests with the same group number.
2. However,, if the first record group number is blank, it will only return the first record.

SameRouting = 7

1. It will search using the supplied info. When the first record is found, it will check to see if this account has routings to another account. If yes, then the list of records returned would include the first record found and all other accounts that share the same routing as the first account.
2. However,, if the first record found does not have routings to another account, then it will search for all accounts that have routings to the first record found.

AccountID = 8

This is Fidelio's internal account id, so the parameter *psSearchStr* passed in should be a valid ID (uxp_a_id). All other parameters (pdDate, peGuestType, peReservationType) passed in will be ignored.

Note: In all the above statements when we mention 'first record found', we would like to clarify that if the function returns more than one record, then the list of records returned do not have any specific sort order and we cannot predict which record will be the first record.

Return Value

CResponseXml.bSuccess = False when input values are invalid or no record found.

CResponseXml.bSuccess = True and CResponseXML.oTables(0) = ADO.NET *data table* when input values are valid. The data table will contain all fields in uxp and res table, please refer to SPMS Data Dictionary for details of the fields)

For example,

```
oResponse = goWS.FidelioSPMSWSXML("GuestSearch", "SessionID", New  
Object() {"05002", #01-01-2011#, 3, 0, True, 3})
```

4. Function: UpdateGuestInfo

This function to update the guest information retrieved from *GuestSearch* function. There could be instances whereby after the call to *GuestSearch* function is made, some updates could have taken place to the same account in SPMS system on the customer side. In cases like this, an error message ‘xxxxxx’ will be returned by the function. This is to prevent the new information being overwritten on either end. When you get this error message, you will need to make another call again to *GuestSearch* function or a refresh of the underlying data table and then only make a call to *UpdateGuestInfo* function to update the account details.

psFunction="UpdateGuestInfo", below is the list of psParam or poParam

Code	Type	Description	Required
poUxpRes	String/Datatable	This is the data table send via GuestSearch, however, only one record is allowed at one time, JSON – string, XML = Data table	Optional when pnAccID is required.
pbyPicture	Byte Array	Byte Array of the picture content	✓
psPictureSource	Integer	How picture is capture (This is required when the pbyPicture exists) 0 – Unknown source 1 – From Web Cam 2 – From RFID passport 3 – From Scan passport image	✓
pnAccID	Integer	SPMS Internal Account Number (For JSON pass in 0 to add new reservation)	Optional when poUxpRes is required.
psReason	String	Reason for change cabin	optional

The following is a description of the parameters.

For XML pass in poUxpRes.Rows(0)!uxp_a_id = 0 to add new reservation.

To update picture only pass in poUxpRes as nothing for XML, empty string for JSON

poUxpRes

This is the data table returned from the *GuestSearch* function, however, only one record is allowed at any one time. So if the *GuestSearch* function returns more than 1 record, you

will need to copy the record that you want to a new data table. (Refer to sample code below on how to do this). Not all fields will be updated, below is the list of fields currently allowed for an update.

For FidelioSPMSWSXML function, the poUxpRes need to serialize first using the below function

```
Public Function SerializeObject(ByVal poObject As Object) As String
    Dim oWriter As XmlSerializer
    Dim oMemory As MemoryStream

    oWriter = New XmlSerializer(poObject.GetType)
    oMemory = New MemoryStream
    oWriter.Serialize(oMemory, poObject)
    SerializeObject =
    System.Text.UnicodeEncoding.Default.GetString(oMemory.ToArray)
    oMemory.Dispose()
    oMemory = Nothing
    oWriter = Nothing
End Function
```

Code	Description	Required
res_award_level	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
res_boardcc_ext	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
res_booknr	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
res_cab	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
res_cancel	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
res_classification	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
res_cruise_days	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
res_dis_e	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
res_email_ship	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
res_emb_e	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional

Code	Description	Required
res_grp	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
res_handicapcode	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
res_handiremarks	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
res_noofcruises	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
res_paxclass	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
res_ppd_tag	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
res_queueid	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
res_rfid	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
res_signoffport_id	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
res_signonport_id	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
res_travel_type	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
res_v_guestid	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
res_v_primary	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_a_city	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_a_country	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_a_frq_cardno	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_a_fstn	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_a_handicaped	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_a_loyalty	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_a_name	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	✓

Code	Description	Required
uxp_a_othname	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_a_salut	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_a_state	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_a_street	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_a_street2	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_a_street3	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_a_titel	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_a_trav_insure	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_a_zip	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_c_insure	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_birthd	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_birthnat	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_birthp	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_cont_city	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_cont_zip	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_cont_country	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_cont_email	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_cont_mob_phon	e If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_cont_name	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_cont_phone	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional

Code	Description	Required
uxp_h_cont_state	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_cont_street	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_cont_street2	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_c_relationship	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_email	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_email2	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_mname	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_nation	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_passdi	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_passex	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_passno	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_passpi	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_passpi_country	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_repeater	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_repeater_other	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_sex	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_telno	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_p_profession	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_p_visa_address1	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_p_visa_address2	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional

Code	Description	Required
uxp_p_visa_city	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_p_visa_email	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_p_visa_phone	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_p_visa_state	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_p_visa_street	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_p_visa_zip	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
res_remarks2	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_lang	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_lang2	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_lang3	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_lang4	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_c_externalid	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_martial	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_hair	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_eyes	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_weight	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_height	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_mob_telno	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_staff_div	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_h_staff_pos	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional

Code	Description	Required
uxp_c_bookno	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_c_bkdate	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_c_bkpassex	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_c_bkpasspi	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	optional
uxp_c_bkpasspi_count ry	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	Optional
uxp_a_othfstn	If no changes, please skip this field, please refer to SPMS 7.30 Data Dictionary	Optional

pbyPicture

This is the byte array of the picture file.

pnAccID

You can get this value from the poUxpRes field uxp_a_id.

Return Value

CResponseXml.bSuccess = True when update is successful

CResponseXml.bSuccess = False when update has failed

When success CResponseXml.oObj(0) = <uxp_a_id>

For example,

```
oResponse = goWS.FidelioSPMSWSXML("UpdateGuestInfo", "SESSIONID",
New Object() { SerializeObject(oUxpRes), <Picture Byte Array>, 1})
```

5. Function: Version

This function returns the version number of the FCWeb Service in use. This is useful to determine a list of available services for each version. From time to time we will add more services. However,, in order for the client application to be backward compatible, it is good to first check the version number of the web service to determine the list of services available and act accordingly.

psFunction="Version", There is no input parameter. Send null to psParam or poParam

Return Value

CResponseXml .oObj = Version number of the web service in use

For example, 7.30.802RC

oResponse = goWS.FidelioSPMSWSXML("Version", "SESSIONID", Nothing)

6. Function: SearchPassenger

This function search for a guest with various criteria from the SPMS system,

Note for psFirstName, psLastName and psPassportNum must supply at least one information.

psFunction="SearchPassenger", below is the list of psParam or poParam

Parameter	Type	Description	Required
psFirstName	String	First Name	Optional
psLastName	String	Embarkation Date	Optional
psPassportNum	String	Guest Type Enumerator	Optional
pdBirthDate	Date	Guest Birth date	✓

The following is a description of the parameters.

psFirstName

Guest First Name, this field is optional, can pass in an empty string.

psLastName

Guest Last Name, this field is optional, can pass in an empty string.

psPassportNum

Guest Passport Number, this field is optional, can pass in an empty string.

Note: For psFirstName, psLastName and psPassportNum, *must* supply at least one information.

pdBirthdate

Guest Birth date

Return Value

CResponseXml.bSuccess = False when input values are invalid or no record found.

CResponseXml.bSuccess = True and CResponseXML.CPassenger when input values are valid.

CPassenger field structure

Parameter	Type	Description
gnID	Integer	Unique Guest ID, this id is used to perform another search
gsFirstName	String	First Name
gsLastName	String	Last Name
gsMiddleName	String	Middle Name
gsTitle	String	Title
gsSalutation	String	Salutation
gdEmbDate	Date	Embarkation Date
gdDisDate	Date	Disembarkation Date
gsCabin	String	Cabin Number
gsCabCategory	String	Cabin Category
gsFreqCruiseNumber	String	Frequent Cruise Number
gsFreqCruiseStatus	String	Frequent Cruise Status
gsDeck	String	Cabin Deck
gsMusterStation	String	Muster Station Name
gsAward	String	Award Level
gsLoyaltyCode	String	Loyalty Discount Code
gsLoyaltyDesc	String	Loyalty Discount Description
gsAccTag	String	Account TAG,P – Pax, C - Crew
gsLanguage1	String	Language 1
gsLanguage2	String	Language 2
gsLanguage3	String	Language 3
gnGrdID	Integer	Group ID
gsGrdName	String	Group Name
gsBookingNo	String	Reservation Booking No
gsDiscount	String	Current not in use

For example,

```
oResponse = goWS.FidelioSPMSWSXML("SearchPassenger", "SESSIONID",
New Object() {<FIRST NAME>, <Last Name>, <Passport Number>,
#1/1/1970#})
```

7. Function: SearchPassengerByID

This function search for a guest with unique guest id from the SPMS.

psFunction="SearchPassengerByID", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	SPMS Unique Guest ID	✓

The following is a description of the parameters.

pnAccID

Unique Guest ID.

Return Value

CResponseXml.bSuccess = False when input values are invalid or no record found.

CResponseXml.bSuccess = True and CResponseXML.CPassenger when input values are valid.

CPassenger field struture

Parameter	Type	Description
gnID	Integer	Unique Guest ID, this id is used to perform another search
gsFirstName	String	First Name
gsLastName	String	Last Name
gsMiddleName	String	Middle Name
gsTitle	String	Title
gsSalutation	String	Salutation
gdEmbDate	Date	Embarkation Date
gdDisDate	Date	Disembarkation Date
gsCabin	String	Cabin Number
gsCabCategory	String	Cabin Category
gsFreqCruiseNumber	String	Frequent Cruise Number
gsFreqCruiseStatus	String	Frequent Cruise Status
gsDeck	String	Cabin Deck
gsMusterStation	String	Muster Station Name
gsAward	String	Award Level
gsLoyaltyCode	String	Loyalty Discount Code
gsLoyaltyDesc	String	Loyalty Discount Description
gsAccTag	String	Account TAG,P – Pax, C - Crew

Parameter	Type	Description
gsLanguage1	String	Language 1
gsLanguage2	String	Language 2
gsLanguage3	String	Language 3
gnGrdID	Integer	Group ID
gsGrdName	String	Group Name
gsBookingNo	String	Reservation Booking No
gsDiscount	String	Current not in use

8. Function: GetExcursion

This function searches the list of excursion available in SPMS.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="GetExcursion", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	Unique Guest ID	✓
pdSDate	Date	Excursion start date	✓
pdEDate	Date	Excursion end date	✓
peCodeType	ExcCodeType	Code Type	✓
psCode	String	Code	Optional

The following is the description of the parameters.

pnAccID

Unique Guest ID, return from SearchPassenger.

pdSDate

The field identifies the minimum date the excursions can start from.

pdEDate

The field identifies the maximum date the excursions must be completed.

peCodeType Enumerator

The field identifies the type of the code being passed for querying excursions.

None	0	→ No Code will be used
PortName	1	→ Excursion Port Name
ExcursionNo	2	→ Excursion No (ExcNo)
UniqueID	3	→ Excursion Unique ID (ExcID)
Category	4	→ Excursion Category Code

psCode

The code for the excursions to run the query on. It can be either the Port name, The Excursion No (ExcNo), the Unique Id (ExcID) or the Excursion Category Code.

Return Value

CResponseXml.bSuccess = False when input values are invalid or no record found.

CResponseXml.bSuccess = True and CResponseXML.oTables(0) = ADO.NET *data table* when input values are valid.

ADO.NET DataTable field structure

Code	Type	Description
ExcID	Integer	Excursion ID
ExcNo	String (10)	Excursion Number
ExcName	String (50)	Excursion Name
ExcBegDate	Date	Starting Date and Time
ExcEndDate	Date	Ending Date and Time
ExcAdultStatus	String (1)	Booking or Adult Booking Status
ExcAdultPrice	Double	Adult Price
ExcChildPrice	Double	Child Price
ExcMeetDate	Date	Meeting Date and Time
ExcMeetPlace	String (100)	Meeting Point
ExcClothes	String (100)	Recommended Clothes
ExcNotes	String (200)	Notes
ExcShowInKiosk	Boolean	Show in Kiosk [External Booking System]
ExcBookInKiosk	Boolean	Book in Kiosk [External Booking System]
ExcMaxSeat	Integer	Maximum Seats or Maximum Adult Seats
ExcBooked	Integer	Seats or Adult Seats Currently Booked
ExcPort	String (50)	Port Name
ExcCategory	String (500)	Category Id & Description [Id-Description; Id-Description]
ExcLang	String (500)	Language Id + “-” + Language Description With “,” as field separator
ExcShowInITV	Boolean	Show in ITV [External Booking System]
ExcBookInITV	Boolean	Book in ITV [External Booking System]
ExcBookChildInITV	Boolean	Book Child Ticket in ITV [External Booking System]
ExcMaxChildSeat	Integer	Maximum Childs Seats
ExcChildBooked	Integer	Child Seats Booked
ExcChildStatus	String(1)	Child Booking Status
ExcProAdultPrice	Integer	Promotion Adult Price
ExcProAdultAv	Integer	Promotion Adult Availability
ExcProAdultID	Integer	Adult Promotion ID
ExcProChildPrice	Integer	Promotion Child Price

Code	Type	Description
ExcProChildAv	Integer	Promotion Child Availability
ExcProChildID	Integer	Child Promotion ID
ExcLongDesc	String(1000)	Tour Long Description
ExcNo2	String	Excursion Brochure Number
ExcMinSeat	Integer	Excursion minimum capacity
ExcWeight	Integer	Total weight allow for the excursion
ExcWeightPerGuest	Boolaan	True the weight is per guest, False the weight is per tour
ExcExternalID	String	External ID

ExcID

The field identifies the unique excursion identifier. This ID can be used for excursion booking. The field is an internal, unique excursion number.

ExcNo

The field identifies the custom, users entered, number that identifies excursion.

ExcName

The field identifies the excursion name (description).

ExcBegDate

The field identifies the excursion starting date and time.

ExcEndDate

The field identifies the excursion ending date and time.

ExcAdultStatus

The field identifies the excursion booking status. If PAR '**Use Adult/Child Max Counts**' is enabled, this is the adult booking status, if the PAR is disabled this is the general booking status.

The following status identifiers values are defined:

- A → Available
- F → Fully booked
- O → Overbooked

ExcAdultPrice

The field identifies the excursion adult price.

ExcChildPrice

The field identifies the excursion child price.

ExcMeetDate

The field identifies the excursion participants meeting date and time.

ExcMeetPlace

The field identifies the excursion participants meeting place.

ExcClothes

The field identifies the recommended clothes for excursions participants.

ExcNotes

The field identifies the additional information about the excursion.

ExcShowInKiosk

The flag to denote if the excursion can be shown on the external system.

ExcBookInKiosk

The flag to denote if the excursion can be booked on the external system.

ExcMaxSeat

If PAR '**Use Adult/Child Max Counts**' is enabled, this is the maximum adult seats available on the excursion, if the PAR is disabled this is the total seats available on the excursion.

ExcBooked

If PAR '**Use Adult/Child Max Counts**' is enabled, this is the adult seats currently booked on the excursion, if the PAR is disabled this is the total seats booked on the excursion.

ExcPort

The field identifies the port for the excursion.

ExcCategory

The field identifies the categories for the excursion.

ExcLang

The field identifies the Language ID (2 digits) + “-” + Language Description, + “,” as the field separator. In one tour there could be more than 1 language available, for example, EN – English, DE – German.

The field will be “EN-English,DE-German”

ExcShowInITV

The flag to denote if the excursion can be shown on ITV the external system.

ExcBookInITV

The flag to denote if the excursion can be booked on the ITV external system.

ExcBookChildInITV

The flag to denote if the excursion child ticket can be booked on the ITV external system.

ExcMaxChildSeat

The field identifies the maximum child seats available on the excursion. This field only exists when PAR 'Use Adult/Child Max Counts' is Enabled.

ExcChildBooked

The field identifies the child seats currently booked on the excursion. This field only exists when PAR 'Use Adult/Child Max Counts' is Enabled.

ExcChildStatus

The field identifies the excursion booking status. If PAR 'Use Adult/Child Max Counts' is Enabled, this is the child booking status. This field does not exist if the PAR is Disabled.

The following status identifiers values are defined:

A → Available

F → Fully booked

O → Overbooked

ExcProAdultPrice

This is the adult promotion price.

ExcProAdultAv

This is the number of seats available for adult promotion price.

ExcProAdultID

This is the adult promotion id, it can be used during Booking. Please refer to pnAdultPromoID in ExcBooking message type for more details.

ExcProChildPrice

This is the child promotion price.

ExcProChildAv

This is the number of seats available for child promotion price.

ExcProChildID

This is the child promotion id, it can be used during Booking. Please refer to pnChildPromoID in ExcBooking message type for more details.

ExcLongDesc

Tour long Description intended for ITV usage.

For example,

```
oResponse = goWS.FidelioSPMSWSXML("GetExcursion", "SESSIONID", New  
Object() {12345, #1/1/2011#, #1/12/2011#, 0, ""})
```

9. Function: GetEvent

This function searches the list of ticket event available in SPMS.

Note: Not supported when connecting to offline QCI Sync DB.

psFunction="GetEvent", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	Unique Guest ID	✓
pdSDate	Date	Event start date	✓
pdEDate	Date	Event end date	✓
peCodeType	EvtCodeType	Code Type	✓
psCode	String	Code	Optional

The following is a description of the parameters.

pnAccID

Unique Guest ID, return from SearchPassenger.

pdSDate

The field identifies the minimum date the event can start from.

pdEDate

The field identifies the maximum date the event must be completed

peCodeType Enumerator

The field identifies the type of the code being passed for querying events.

None	0	→ No Code will be used
LocationID	1	→ Event Location ID,you can get the value from WSFunction->GetLocationInfo->LOC_ID
EventNo	2	→ Event No (EvtNo)
UniqueID	3	→ Event Unique ID (EvtID)

psCode

The code for the Events to run the query on. It can be either the location code, The Event No (EvtNo), the Unique Id (EvtID).

Return Value

CResponseXml.bSuccess = False when input values are invalid or no record found.

CResponseXml.bSuccess = True and CResponseXML.oTables(0) = ADO.NET *data table* when input values are valid.

ADO.NET DataTable field structure

Code	Type	Description
EvtID	Integer	Event ID
EvtNo	String(20)	Event Number
EvtName	String(50)	Event Name
EvtBegDate	Date	Starting Date and Time
EvtEngDate	Date	Ending Date and Time
EvtLastCall	Date	Last Call Time
EvtStatus	String(1)	Booking Status
EvtPriceCategory	String(6)	Price Category Code
EvtPriceDesc	String(50)	Price Category Description
EvtPersonCode	String(6)	Person Group Code
EvtPersonDesc	String(50)	Person Group Description
EvtIsFixedSeatingEvent	Boolean	True-Fixed Seating Event, False-regular Free Seating Event
EvtIsLevelHybrid	Boolean	True-Level Hybrid mode
EvtHybridLevelOpenSeatingCapacity	Integer	Open Seating max capacity for Hybrid Levels
EvtLayoutLevelCode	String(20)	Layout Level Code
EvtLayoutLevelDesc	String(50)	Layout Level Description
EvtSeatingZoneCode	String(20)	Seating Zone Code
EvtSeatingZoneDesc	String(50)	Seating Zone Description
EvtIsFixedSeatingPrice	Boolean	True- Fixed Seating Price Setup, False-regular Free Seating Price
EvtPrice	Double	Price
EvtDesc	String(200)	Event Description
EvtShowInKiosk	Boolean	Show in Kiosk [External Booking System]
EvtBookInKiosk	Boolean	Book in Kiosk [External Booking System]
EvtMaxSeat	Integer	Maximum Seats
EvtBooked	Integer	Seats Currently Booked
EvtLocation	String(50)	Location Name

Code	Type	Description
EvtShowInITV	Boolean	Show in ITV [External Booking System]
EvtBookInITV	Boolean	Book in ITV [External Booking System]
EvtLongDesc	X(1000)	Event Long Description
EvtPriceID	Integer	Price ID
EvtLayoutLevelID	Integer	Layout Level ID
EvtSeatingZoneID	Integer	Seating Zone ID

EvtID

The field identifies the unique event identifier. This ID can be used for event booking. The field is an internal, unique event number.

EvtNo

The field identifies the custom, users entered, a number that identifies the event.

EvtName

The field identifies the event name (description).

EvtBegDate

The field identifies the event starting date and time.

EvtEndDate

The field identifies the event ending date and time.

EvtLastCall

The field identifies the last call time, please ignore the date part.

EvtStatus

The field identifies the event booking status. The following status identifiers values are defined:

A → Available

F → Fully booked

O → Overbooked

For Fixed Seating Events, the Booking status applies to the Seating Zone.

EvtPriceCategory

The field identifies the event price category code, this field is required during booking.

for example, Gold (Gold Class), Silver(Silver Class)

EvtPriceDesc

The field identifies the event price category description.

EvtPersonCode

The field identifies the person group code, this field is required during booking.

For example,

Adult

Child

Senior

EvtPersonDesc

The field identifies the person group description.

EvtIsFixedSeatingEvent

True-Fixed Seating Event, False- regular Free Seating Event

EvtIsLevelHybrid

True-Level Hybrid mode (Fixed Seating plus Open Seating Capacity), False – Level is only Fixed Seating

EvtHybridLevelOpenSeatingCapacity

Open Seating max attendees capacity for Hybrid Levels

EvtLayoutLevelCode

The field identifies the layout level code for fixed seating assignment bookings.

EvtLayoutLevelDesc

The field identifies the layout level description for fixed seating assignment bookings.

EvtSeatingZoneCode

The field identifies the seating zone code for fixed seating assignment bookings.

EvtSeatingZoneDesc

The field identifies the seating zone description for fixed seating assignment bookings.

EvtIsFixedSeatingPrice

True- Fixed Seating Price Setup, False-regular Free Seating Price

EvtPrice

The field identifies the event selling price.

EvtDesc

The field identifies the additional information about the event.

EvtShowInKiosk

The flag to denote if the event can be shown on the external system.

EvtBookInKiosk

The flag to denote if the event can be booked on the external system.

EvtMaxSeat

Total seats available on the event.

Note: For the same event id the same seat could be sold at different price depending on the price category and person group. So the total seats appear on different price category and person group will be representing the same seats.

for example, Below means the event 1 only have 50 seats available, for the same EID will always have the same MAX value.

EID	PCT	PGT	MAX
1	Gold	Adult	50
1	Silver	Adult	50
1	Gold	Child	50
1	Silver	Child	50

For Fixed Seating Events, the total seat count applies to the Seating Zone

EvtBooked

This is the total seats booked on the event.

For Fixed Seating Events, the total seats booked count applies to the Seating Zone.

EvtLocation

The field identifies the location name of the event.

EvtShowInITV

The flag to denote if the event can be shown on ITV the external system.

EvtBookInITV

The flag to denote if the event can be booked on the ITV external system, the field returns 'Yes' or 'No' only.

EvtLongDesc

Event long Description intended for ITV usage.

EvtPriceID

The field identifies the unique pricing setup identification number. This ID must be used for event fixed seating booking. The field is an internal, unique pricing setup number.

EvtLayoutLevelID

The field identifies the unique Layout Level identification number. This ID must be used for event fixed seating booking. The field is an internal, unique layout level number.

EvtSeatingZoneID

The field identifies the unique Seating Zone identification number. This ID must be used for event fixed seating booking. The field is an internal, unique seating zone number.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("GetEvent", "SESSIONID", New  
Object() {12345, #1/1/2011#, #1/12/2011#, 0, ""})
```

10. Function: GetTreatmentAvailability

Not supported when connecting to offline QCI Sync DB

This function is used to request the SPA Treatment Availability (time slot) from the SPMS.

psFunction="GetTreatmentAvailability", below is the list of psParam or poParam

Code	Type	Description	Required
pnAccID	Integer	Account ID	✓
pnSPALocation	Integer	Location ID	✓
pnSPATreatmentItem	Integer	Treatment Item ID	✓
pdDateFrom	Date	Starting Date period	optional
pdDateTo	Date	Ending Date period	optional

The following is a description of the parameters.

pnAccID

Unique Guest ID, return from SearchPassenger.

pnSPALocation

The field identifies the unique location identification. The field is an internal, unique code. This value is retrieved from GetSPALocation WebMethod.

pnSPATreatmentItem

The field identifies the unique treatment item identification. The field is an internal, unique code. This field is retrieve from GetSPATreatmentItem or GetSPATreatmentItemForPeriod WebMethods.

pdDateFrom , pdDateTo

The fields identify the optional Starting and Ending Dates period for which the system will return availability time slots when **pnAccID** is set to 0.

Return Value

CResponseXml.bSuccess = False when input values are invalid or no record found.

CResponseXml.bSuccess = True and CResponseXML.oTables(0) = ADO.NET *data table* when input values are valid.

ADO.NET DataTable field struture

Code	Type	Description
spa_date	Date	Date and Time

Code	Type	Description
spa_price	Double	Treatment Price

spa_date

The field returns the date which the treatment is available.

spa_price

The field identifies the treatment item price.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("GetTreatmentAvailability",
"SESSIONID", New Object() {12345, 123, 12})  
  
oResponse = goWS.FidelioSPMSWSXML("GetTreatmentAvailability",
"SESSIONID", New Object() {0, 123, 12, #1/1/2011#, #1/12/2011#})
```

11. Function: GetPackageTreatmentAvailability

This function is used to request the SPA Package Treatment Availability (time slot) from the SPMS.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="GetPackageTreatmentAvailability", below is the list of psParam or poParam

Code	Type	Description	Required
pnAccID	Integer	Account ID	✓
pnSPATreatmentItem	Integer	Treatment Item ID	✓
pnSPAPackageID	Integer	Package ID	✓
pdDateFrom	Date	Starting Date period	optional
pdDateTo	Date	Ending Date period	optional

The following is a description of the parameters.

pnAccID

Unique Guest ID, return from SearchPassenger.

pnSPATreatmentItem

The field identifies the unique Package treatment item identification. The field is an internal, unique code. This field is retrieve from GetSPAPackageItems or GetSPAPackageItemsForPeriod WebMethods.

pnSPAPackageID

The field identifies the unique Package identification. The field is an internal, unique code. This value is retrieved from GetSPAPackages WebMethod.

pdDateFrom

pdDateTo

The fields identify the optional Starting and Ending Dates period for which the system will return availability time slots when **pnAccID** is set to 0.

Return Value

CResponseXml.bSuccess = False when input values are invalid or no record found.

CResponseXml.bSuccess = True and CResponseXML.oTables(0) = ADO.NET *data table* when input values are valid.

ADO.NET DataTable field structure

Code	Type	Description
spa_date	Date	Date and Time
spa_price	Double	Treatment Price

spa_date

The field returns the date which the treatment is available.

spa_price

The field identifies the Package treatment item price.

for example,

```
oResponse =
goWS.FidelioSPMSWSXML("GetPackageTreatmentAvailability",
"SESSIONID", New Object() {12345, 12, 15})

oResponse =
goWS.FidelioSPMSWSXML("GetPackageTreatmentAvailability",
"SESSIONID", New Object() {0, 12, 15, #1/1/2011#, #1/12/2011#})
```

12. Function: GetExcPackage

This function searches the list of excursion package available in SPMS

The message is usually used to display a list of excursions package that falls within date starting and ending criteria. The following is a description of the fields in the message data block. One package usually contains more than 1 excursion; all tours within the package must fall within the start date and end date. If either date is ignored, it will return all the package belong to current cruise.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="GetExcPackage", below is the list of psParam or poParam.

Parameter	Type	Description	Required
pnAccID	Integer	Unique Guest ID	✓
pdSDate	Date	Excursion start date	✓
pdEDate	Date	Excursion end date	✓

The following is a description of the parameters.

pnAccID

Unique Guest ID, return from SearchPassenger.

pdSDate

The field identifies the minimum date the excursions package can start from. Enter 30-Dec-1899 to return all package belong to current cruise.

pdEDate

The field identifies the maximum date the excursions package must be completed. Enter 30-Dec-1899 to return all packages belong to current cruise.

psErrMsg

It will return an error message, for example, DB connection is down.

Return Value

CResponseXml.bSuccess = False when input values are invalid or no record found.

CResponseXml.bSuccess = True and CResponseXML.oTables(0) = ADO.NET *data table* when input values are valid.

ADO.NET DataTable field struture

Code	Type	Description
ExcPkgID	Integer	Package ID
ExcPkgNo	String(10)	Package Number
ExcPkgName	String(50)	Package Name
ExcAdultPrice	Double	Package Adult Price
ExcChildPrice	Double	Package Child Price
ExcShowInKiosk	Boolean	Show in Kiosk [External Booking System]
ExcBookInKiosk	Boolean	Book in Kiosk [External Booking System]
ExcMaxSeat	Integer	Maximum Package or Maximum Adult Package
ExcBooked	Integer	Package or Adult Package Currently Booked
ExcAdultStatus	String(1)	Booking or Adult Booking Status
ExcAdultAv	Integer	Package or Adult package available
ExcMaxChildSeat	Integer	Maximum Childs Package
ExcChildBooked	Integer	Child Package Booked
ExcChildStatus	String(1)	Child Booking Status
ExcChildAv	Integer	Child package available
ExcProAdultPrice	Integer	Promotion Adult Price
ExcProAdultAv	Integer	Promotion Adult Availability
ExcProAdultID	Integer	Adult Promotion ID
ExcProChildPrice	Integer	Promotion Child Price
ExcProChildAv	Integer	Promotion Child Availability
ExcProChildID	Integer	Child Promotion ID
ExcID	Integer	Excursion ID
ExcNo	String(10)	Excursion Number
ExcName	String(50)	Excursion Name
ExcBegDate	Date	Starting Date and Time
ExcEndDate	Date	Ending Date and Time
ExcMeetDate	Date	Meeting Date and Time
ExcMeetPlace	String (100)	Meeting Point
ExcClothes	String (100)	Recommended Clothes
ExcNotes	String (200)	Notes
ExcPort	String (50)	Port Name
ExcCategory	String(500)	Category Id & Description [Id-Description; Id-Description]

Code	Type	Description
ExcLang	String(500)	Language Id + “-” + Language Description With “,” as field separator
ExcLongDesc	String(1000)	Tour Long Description

ExcPkgID

The field identifies the unique excursion identifier. This ID can be used for excursion package booking. The field is an internal, unique excursion number.

ExcPkgNo

The field identifies the custom, users entered, a number that identifies excursion.

ExcPkgName

The field identifies the excursion name (description).

ExcAdultPrice

The field identifies the excursion adult price.

ExcChildPrice

The field identifies the excursion child price.

ExcShowInKiosk

The flag to denote if the excursion can be shown on the external system.

ExcBookInKiosk

The flag to denote if the excursion can be booked on the external system.

ExcMaxSeat

If PAR ‘**Use Adult/Child Max Counts**’ is enabled, this is the maximum adult packages available, if the PAR is disabled this is the total packages available.

ExcBooked

If PAR ‘**Use Adult/Child Max Counts**’ is enabled, this is the adult packages currently booked on the excursion, if the PAR is disabled this is the total packages booked.

ExcAdultStatus

The field identifies the excursion booking status. If PAR ‘**Use Adult/Child Max Counts**’ is enabled, this is the adult booking status, if the PAR is disabled this is the general booking status.

The following status identifiers values are defined:

-
- A → Available
 - F → Fully booked
 - O → Overbooked

ExcAdultAv

If PAR '**Use Adult/Child Max Counts**' is Enabled, this is the current adult package available on the excursion, if the PAR is Disabled this is the total package available.

ExcMaxChildSeat

The field identifies the maximum child packages available. This field only valid when PAR '**Use Adult/Child Max Counts**' is Enabled.

ExcChildBooked

The field identifies the child packages currently booked. This field only valid when PAR '**Use Adult/Child Max Counts**' is Enabled.

ExcChildStatus

The field identifies the excursion booking status. If PAR '**Use Adult/Child Max Counts**' is Enabled. This field only valid when PAR '**Use Adult/Child Max Counts**' is Enabled.

The following status identifiers values are defined:

- A → Available
- F → Fully booked
- O → Overbooked

ExcChildAv

If PAR '**Use Adult/Child Max Counts**' is enabled, this is the current child package available. This field only valid when PAR '**Use Adult/Child Max Counts**' is Enabled.

ExcProAdultPrice

This is the adult promotion price.

ExcProAdultAv

This is the number of packages available for adult promotion price.

ExcProAdultID

This is the adult promotion id, it can be used during ExcPackageBooking. Please refer to pnAdultPromoID in ExcPackageBooking message type for more details.

ExcProChildPrice

This is the child promotion price.

ExcProChildAv

This is the number of packages available for child promotion price.

ExcProChildID

This is the child promotion id, it can be used during Booking. Please refer to pnChildPromoID in ExPackageBooking message type for more details

ExcID

The field identifies the unique excursion identifier. This ID can be used for excursion booking. The field is an internal, unique excursion number.

ExcNo

The field identifies the custom, users entered, a number that identifies excursion.

ExcName

The field identifies the excursion name (description).

ExcBegDate

The field identifies the excursion starting date and time.

ExcEndDate

The field identifies the excursion ending date and time.

ExcMeetDate

The field identifies the excursion participants meeting date and time.

ExcMeetPlace

The field identifies the excursion participants meeting place.

ExcClothes

The field identifies the recommended clothes for excursions participants.

ExcNotes

The field identifies the additional information about the excursion.

ExcPort

The field identifies the port for the excursion.

ExcCategory

The field identifies the categories for the excursion.

ExcLang

The field identifies the Language ID (2 digits) + “-“ + Language Description, + “,” as the field separator. In one tour there could be more than 1 language available for example, EN – English, DE – German.

The field will be “EN-English,DE-German”

ExcLongDesc

Tour long Description intended for ITV usage.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("GetExcPackage", "SESSIONID",
New Object() {12345, #1/1/2011#, #1/12/2011#})
```

13. Function: GetExcFolio

This function is used to request a list of excursions booked on a specific account in SPMS.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="GetExcFolio", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	Unique Guest ID	✓

The following is a description of the parameters.

pnAccID

Unique Guest ID, return from SearchPassenger.

Return Value

CResponseXml.bSuccess = False when input values are invalid or no record found.

CResponseXml.bSuccess = True and CResponseXML.oTables(0) = *ADO.NET data table* when input values are valid.

ADO.NET DataTable field struture

Code	Type	Description
ExcID	Integer	Excursion ID
ExcNo	String(10)	Excursion Number
ExcName	String(50)	Excursion Name
ExcBegDate	Date	Starting Date and Time
ExcEndDate	Date	Ending Date and Time
ExcStatus	String(1)	Excursion Status
ExcBookDate	Date	Booking Date and Time
ExcQty	Integer	Number of Tickets Booked
ExcTotal	Double	Booking Value
ExcMeetDate	Date	Meeting Date and Time
ExcMeetPlace	String(100)	Meeting Point
ExcClothes	String(100)	Recommended Clothes
ExcNotes	String(200)	Notes
ExcTag	String(1)	TAG

Code	Type	Description
ExcPrint	Integer	Ticket Printed Count
ExcDiscount	Double	Discount Amount
ExcControl	Integer	Internal Booking Number
ExcLanguage	String(250)	Language
ExcPrepaid	Boolean	Prepaid
ExcCategory	String(500)	Category Id & Description [Id-Description; Id-Description]

ExcID

The field identifies the unique excursion identifier. This ID can be used to link the excursion with items retrieved from Excursions message. The field is an internal, unique excursion number.

ExcNo

The field identifies the custom, users entered, a number that identifies excursion.

ExcName

The field identifies the excursion name (description).

ExcBegDate

The field identifies the excursion starting date and time.

ExcEndDate

The field identifies the excursion ending date and time.

ExcStatus

The field identifies the excursion booking status. The following status identifiers values are defined:

A → Available

F → Fully Booked

O → Overbooked

ExcBookDate

The field identifies the excursion booking date and time (real date and time).

ExcQty

The field identifies the number of tickets booked.

ExcTotal

The field identifies the total value of the bookings for the returned excursions.

ExcMeetDate

The field identifies the excursion participants meeting date and time.

ExcMeetPlace

The field identifies the excursion participants meeting place.

ExcClothes

The field identifies the recommended clothes for excursions participants.

ExcNotes

The field identifies the additional information about the excursion.

ExcTag

The field identifies the adult or children indicator.

A → Adult

C → Children

ExcPrint

The field identifies how many times the tickets had been printed.

ExcDiscount

Discount Amount.

ExcControl

Internal Booking Number.

ExcLanguage

Language, for example, English.

ExcPrepaid

True – Prepaid at shore side, False – Book onboard.

ExcCategory

The field identifies the categories for the excursion.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("GetExcFolio", "SESSIONID", New  
Object() {12345})
```

14. Function: GetEvtFolio

This function is used to request a list of event booked on a specific account in SPMS.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="GetEvtFolio", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	Unique Guest ID	✓

The following is a description of the parameters.

pnAccID

Unique Guest ID, return from SearchPassenger.

Return Value

CResponseXml.bSuccess = False when input values are invalid or no record found.

CResponseXml.bSuccess = True and CResponseXML.oTables(0) = ADO.NET *data table* when input values are valid.

ADO.NET DataTable field struture

Code	Type	Description
EvtID	Integer	Event ID
EvtNo	String(20)	Event Number
EvtName	String(50)	Event Name
EvtBegDate	Date	Starting Date and Time
EvtEngDate	Date	Ending Date and Time
EvtStatus	String(1)	Booking Status
EvtBookDate	Date	Booking Date and Time
EvtPriceCategory	String(6)	Price Category Code
EvtPriceDesc	String(50)	Price Category Description
EvtPersonCode	String(6)	Person Group Code
EvtPersonDesc	String(50)	Person Group Description
EvtLayoutLevelCode	String(20)	Layout Level Code
EvtLayoutLevelDesc	String(50)	Layout Level Description
EvtSeatingZoneCode	String(20)	Seating Zone Code
EvtSeatingZoneDesc	String(50)	Seating Zone Description

Code	Type	Description
EvtSeatCode	String(20)	Seat Code
EvtLocation	String(50)	Location Name
EvtQty	Integer	Number of Tickets Booked
EvtTotal	Double	Booking Value
EvtNotes	String(200)	Notes
EvtPrint	Integer	Ticket Printed Count
EvtDiscount	Double	Discount Amount
EvtControl	Integer	Internal Booking Number
EvtPrepaid	Boolean	Prepaid

EvtID

The field identifies the unique event identifier. This ID can be used for event booking. The field is an internal, unique event number.

EvtNo

The field identifies the custom, users entered, a number that identifies the event.

EvtName

The field identifies the event name (description).

EvtBegDate

The field identifies the event starting date and time.

EvtEndDate

The field identifies the event ending date and time.

EvtStatus

The field identifies the event booking status. The following status identifiers values are defined:

- A → Available
- F → Fully booked
- O → Overbooked

EvtBookDate

The field identifies the excursion booking date and time (real date and time).

EvtPriceCategory

The field identifies the event price category code; this field is required during booking.

For example, Gold (Gold Class), Silver (Silver Class)

EvtPriceDesc

The field identifies the event price category description.

EvtPersonCode

The field identifies the person group code, this field is required during booking.

for example,

Adult

Child

Senior

EvtPersonDesc

The field identifies the person group description.

EvtLayoutLevelCode

The field identifies the layout level code for fixed seating assignment bookings.

EvtLayoutLevelDesc

The field identifies the layout level description for fixed seating assignment bookings.

EvtSeatingZoneCode

The field identifies the seating zone code for fixed seating assignment bookings.

EvtSeatingZoneDesc

The field identifies the seating zone description for fixed seating assignment bookings.

EvtSeatCode

The field identifies the seat id, for example, B15 for fixed seating assignment bookings.

EvtLocation

The field identifies the location name of the event.

EvtQty

The field identifies the number of tickets booked.

EvtTotal

The field identifies the total value of the bookings for the returned excursions.

EvtNotes

The field identifies the additional information about the event.

EvtPrint

The field identifies how many times the tickets had been printed.

EvtDiscount

Discount Amount.

EvtControl

Internal Booking Number.

EvtPrepaid

True – Prepaid at shore side, False – Book onboard.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("GetEvtFolio", "SESSIONID", New  
Object() {12345})
```

15. Function: UpdateEmail

This web method function allows updating of e-mail (res_email_ship) to SPMS.

psFunction="UpdateEmail", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	SPMS Guest Unique ID	✓
psOldEMail	String	Old E-Mail address	✓
psNewEMail	String	New E-Mail address	✓

The following is a description of the parameters.

pnAccID

Unique Guest ID, return from SearchPassenger.

psOldEmail

This is the existing e-mail address for validation purpose. If there is no previous e-mail address pass in an empty string.

psNewEmail

This is the new e-mail address to update to the DB.

Return Value

CResponseXml.bSuccess = True when UpdateEmail is successful

CResponseXml.bSuccess = False when UpdateEmail has failed

for example,

```
oResponse = goWS.FidelioSPMSWSXML("UpdateEmail", "SESSIONID", New  
Object() {12345, "test@test.com", "Ship@ship.com", 0, ""})
```

16. Function: GetCheckImage

This function gets the check image from SPMS.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="GetCheckImage", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnMibID	Integer	SPMS Unique Check Image ID	✓

The following is a description of the parameters.

pnMibID

SPMS Unique Check Image ID, return from GetInvoiceTotal.

Return Value

CResponseXml.bSuccess = True when GetCheckImage is successful

CResponseXML.oObj(0)

This is the check image from Micros with signature. This is the preferred image to display if both pbyImage and psCheckImage exists.

CResponseXML.oObj(1)

This is the text image of a guest check.

CResponseXml.bSuccess = False when GetCheckImage has failed or no record found

for example,

```
oResponse = goWS.FidelioSPMSWSXML("GetCheckImage", "SESSIONID",
New Object() {12345576})
```

17. Function: UpdateMessageStatus

This Function update the message delivered status.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="UpdateMessageStatus", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnMsgID	Integer	SPMS Unique Message ID	✓
pbDelivered	Boolean	True - Set the message status to delivered False – Set the message status to not delivered	✓

The following is a description of the parameters.

pnMsgID

SPMS Unique Message ID, return from GetMessage.

pbDelivered

True - Set the message status to delivered

False – Set the message status to not delivered

Return Value

CResponseXml.bSuccess = True when UpdateMessageStatus is successful

CResponseXml.bSuccess = False when UpdateMessageStatus has failed

for example,

```
oResponse = goWS.FidelioSPMSWSXML("UpdateMessageStatus",
"SESSIONID", New Object() {12345, #1/1/2011#, #1/12/2011#, 0, ""})
```

18. Function: WSFunction

This function calls a user define function to retrieve information from SPMS. You need to read a separate document on the available function as this different from customer to customer.

psFunction="WsFunction", below is the list of psParam or poParam

Parameter	Type	Description	Required
poParam	Array	Array of parameter, this parameter different from function to function	Optional

The following is a description of the parameters.

poParam

The first element is the function name, the rest will depend on a function to function.

If the parameter is date field, you need to pass in a date string in **YYYYMMDDHHMMSS** format.

Return Value

CResponseXml.bSuccess = False when input values are invalid or no record found.

CResponseXml.bSuccess = True and CResponseXML.oTables = Array of *ADO.NET data table* when input values are valid.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("WSFunction", "SESSIONID", New  
Object() {"GetCabin", "05002"})
```

19. Function: ExcBooking

This function creates an excursion booking in SPMS.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="ExcBooking", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	Unique Guest ID	✓
psUniqID	String(30)	Unique Excursion Booking ID	✓
pnExclID	Integer	Excursion ID	✓
pnAdultTicket	Integer	Number of Adult Tickets	✓
pnChildTicket	Integer	Number of Child Tickets	✓
pnAdultPromoID	Integer	Adult Promotion ID (Default = 0)	optional
pnChildPromotID	Integer	Child Promotion ID (Default = 0)	optional
psLanguage	String(2)	ISO Language Code (Default Empty)	optional
psNotes	String(50)	Notes (Default Empty)	optional
psPin	String(4)	Pin Code (Default Empty)	optional
psSource	String(100)	Booking Source (Default Empty)	optional
pbForceBooking	Boolean	True-Allow posting even the guest do not have credit limit or posting is disable, False – Normal posting	✓
pbKiosk	Boolean	Kiosk Flag	optional
pbySigImage	Array of Byte	Signature Byte Array	optional
pbPercentageDiscount	Boolean	True = Percentage Discount, False = Value Discount	optional
pnDiscount	Decimal	Discount Percentage Rate or Discount Value depend on pbPercentageDiscount	optional
pnOvewriteSalesPrice	Decimal	User define price	optional
pnWeight	Decimal	Weight, 0 if overweight is not used, > 0 it will charge overweight depend on the setup	optional
pnHeight	Decimal	Height, for info only	optional
pbAllowWaitList	Boolean	True = Allow Wait List when shorex is fully booked, False = Return error when shorex is fully booked.	optional

Parameter	Type	Description	Required
pnParticipant	Integer	Unique Guest ID for the person who will take part in the excursion	optional

pnAccID

Unique Guest ID, return from SearchPassenger.

psUniqID

The field identifies the booking unique within the whole external system. The field is used as a cross-reference to obtain detailed information about all the transactions recorded on a booking.

pnExcID

The field identifies the unique excursion identification number. This ID can be obtained through GetExcursion WebMethod. The field is an internal, unique excursion number.

pnAdultTicket

The field identifies the number of adult priced tickets to book.

pnChildTicket

The field identifies the number of child priced tickets to book.

pnAdultPromoID

The field identified the adult promotion id, if this field is ignore, the guest will still entitle for promotion price if available else normal price will be apply. If promotion id is sent and promotion price no longer available, an error message will return.

for example, If promotion price only valid for 1 seat and the guest try to book 2 seats.

With pnAdultPromoID send

An error message will return indicate only 1 seat is available.

Without pnAdultPromoID send

Booking done with 1 seat at promotion price and 1 seat at normal price.

pnChildPromoID

The field identified the child promotion id, if this field is ignore, the guest will still entitle for promotion price if available else normal price will be apply. If promotion id is sent and promotion price no longer available, an error message will return.

psLanguage

The field identifies the language id of the tour.

psNotes

The field identifies the additional information send by 3rd party.

psPin

The field identifies the telephone PIN code of the reservation account. The valid character is 0,1,2,3,4,5,6,7,8,9. Leading zero support depend on SPMS Parameter setting.

psSource

The field identifies the source of the booking. Eg: Workstation Id, Kiosk Id, etc. or any other details describing the location where the booking was made.

pbForceBooking

True-Allow posting even the guest do not have credit limit or posting is disabled (This only apply to check-in guest only), False-Normal posting

pbKiosk

For future use, current no effect.

pbySignature

This is the signature image in byte array format

pbPercentageDiscount

True = Percentage discount, False = dollar value discount

pnDiscount

If pbPercentageDiscount = True, this is the discount percentage else this is the discount value

pnOvewriteSalesPrice

if this is > 0, we will use this price to post instead of the price define in the DB, use it with care.

pnWeight

Pass in 0 if overweight is not used, > 0 it will charge overweight depend on the setup

pnHeight

For info only

pbAllowWaitList

True = Allow Wait List when shorex is fully booked,

False = Return error when shorex is fully booked. (Default value)

If the booking is posted to the waitlist, CResponseXml.oObj(0) will return the Wait List Number, this only happen when pbAllowWaitList = True and the booking is fully book.

pnParticipant

0-pnAccID is the participant

>0-Must be a valid unique guest id, the guest which will participant in the excursion, no validation on the id

Return Value

CResponseXml.bSuccess = False when input values are invalid or no record found.

CResponseXml.bSuccess = True and CResponseXML.oTables(0) = *ADO.NET data table* when input values are valid. CResponse.Xml.oObj(0) will be > 0 if the booking is posted to wait list.

ADO.NET DataTable field structure (It will always return only 1 record when input is valid)

Code	Type	Description
AccID	Integer	Account Posted
Balance	Double	Account Balance
CruiseID	Integer	Posted Cruise ID

AccID

The account posted can be different from the pnAccID pass in if the pbForceBooking is set to True and the said account does not exist and not allow to do posting the return value will be internal system error account id.

Balance

The field identifies the balance after the posting is applied. This field can return positive (account is to be invoiced) or negative (account prepaid) value.

CruiseID

The field identifies the posted cruise id.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("ExcBooking", "SESSIONID", New  
Object() {12345, 37464, 245457, 1, 0, 0, 0, "", "", "", "",  
False})
```

20. Function: ExcBookingPackage

This function makes an excursion package booking in SPMS.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="ExcBookingPackage", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	Unique Guest ID	✓
psUniqID	String(30)	Unique Excursion Package Booking ID	✓
pnExcPkgID	Integer	Excursion Package ID	✓
pnAdultTicket	Integer	Number of Adult Tickets	✓
pnChildTicket	Integer	Number of Child Tickets	✓
pnAdultPromoID	Integer	Adult Promotion ID (Default = 0)	optional
pnChildPromoID	Integer	Child Promotion ID (Default = 0)	optional
psLanguage	String(2)	ISO Language Code (Default Empty)	optional
psNotes	String(50)	Notes (Default Empty)	optional
psPin	String(4)	Pin Code (Default Empty)	optional
psSource	String(100)	Booking Source (Default Empty)	optional
pbForceBooking	Boolean	True-Allow posting even the guest do not have credit limit or posting is disable, False – Normal posting	✓
pbKiosk	Boolean	Kiosk Flag	optional
pbySigImage	Array of Byte	Signature Byte Array	optional
pnWeight	Decimal	Weight, 0 if overweight is not used, > 0 it will charge overweight depend on the setup	optional
pnHeight	Decimal	Height, for info only	optional
pbAllowWaitList	Boolean	True = Allow Wait List when shorex is fully booked, False = Return error when shorex is fully booked.	optional
pnParticipant	Integer	Unique Guest ID for the person who will take part in the excursion	optional

pnAccID

Unique Guest ID, return from SearchPassenger.

psUniqID

The field identifies the booking unique within the whole external system. The field is used as a cross-reference to obtain detailed information about all the transactions recorded on a booking.

pnExcPkgID

The field identifies the unique excursion package identification number. This ID can be obtained through GetExcPackage WebMethod. The field is an internal, unique excursion number.

pnAdultTicket

The field identifies the number of adult priced tickets to book.

pnChildTicket

The field identifies the number of children priced tickets to book.

pnAdultPromoID

The field identified the adult promotion id, if this field is ignored, the guest will still entitle for promotion price if available, else normal price will be applied. If promotion id is sent and promotion price no longer available, an error message will return.

for example, If promotion price only valid for 1 seat and the guest try to book 2 seats.

With pnAdultPromoID send

An error message will return indicate only 1 seat is available.

Without pnAdultPromoID send

Booking was done with 1 seat at promotion price and 1 seat at normal price.

pnChildPromoID

The field identified the child promotion id, if this field is ignored, the guest will still entitle for promotion price if available, else normal price will be applied. If promotion id is sent and promotion price no longer available, an error message will return.

psLanguage

The field identifies the language id of the tour.

psNotes

The field identifies the additional information sent by third-party.

psPin

The field identifies the telephone PIN code of the reservation account. The valid character is 0,1,2,3,4,5,6,7,8,9. Leading zero to support depends on SPMS Parameter setting.

psSource

The field identifies the source of the booking. Eg: Workstation Id, Kiosk Id, etc. or any other details describing the location where the booking was made.

pbForceBooking

True-Allow posting even the guest do not have credit limit or posting is disabled (This only apply to check-in guest only), False-Normal posting

pbKiosk

For future use, current no effect.

pbySignature

This is the signature image in byte array format

pbPercentageDiscount

True = Percentage discount, False = dollar value discount

pnDiscount

If pbPercentageDiscount = True, this is the discount percentage else this is the discount value

pnOvewriteSalesPrice

if this is > 0, we will use this price to post instead of the price defined in the DB, use it with care.

pnWeight

Pass in 0 if overweight is not used, > 0 it will charge overweight depend on the setup

pnHeight

For info only

pbAllowWaitList

True = Allow Wait List when Shore Excursion is fully booked,

False = Return error when Shore Excursion is fully booked. (Default value)

If the booking is posted to the waitlist, CResponseXml.oObj(0) will return the Wait List Number, this only happens when pbAllowWaitList = True and the booking is fully booked.

pnParticipant

0-pnAccID is the participant

>0-Must be a valid unique guest id, the guest which will participate in the excursion, no validation on the id

Return Value

CResponseXml.bSuccess = False when input values are invalid or no record found.

CResponseXml.bSuccess = True and CResponseXML.oTables(0) = ADO.NET *data table* when input values are valid. CResponse.Xml.oObj(0) will be > 0 if the booking is posted to wait list.

ADO.NET DataTable field structure (It will always return only 1 record when input is valid)

Code	Type	Description
Balance	Double	Account Balance
CruiseID	Integer	Posted Cruise ID

Balance

The field identifies the balance after the posting is applied. This field can return positive (account is to be invoiced) or negative (account prepaid) value.

CruiseID

The field identifies the posted cruise id.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("ExcBookingPackage",
"SESSIONID", New Object() {12345, 37464, 245457, 1, 0, 0, 0, "", "",
"", "", "", False})
```

21. Function: EvtBooking

This function creates an event booking in SPMS.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="EvtBooking", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	Unique Guest ID	✓
psUniqID	String(30)	Unique Event Booking ID	✓
pnEvtID	Integer	Event ID	✓
psPriceCategory	String(6)	Price Category Code	✓
psPersonGroup	String(6)	Person Group Code	✓
pnTicket	Integer	Number of Tickets	✓
psNotes	String(50)	Notes (Default Empty)	optional
psPin	String(4)	Pin Code (Default Empty)	optional
psSource	String(100)	Booking Source (Default Empty)	optional
pbForceBooking	Boolean	True-Allow posting even the guest do not have credit limit or posting is disable, False – Normal posting	✓
pbIsFixedSeating	Boolean	True-Fixed Seating assignment booking, False – regular free seating booking	optional
pnSeatID	Integer	Seat ID	optional
pnPriceID	Integer	Price ID	optional

pnAccID

Unique Guest ID, return from SearchPassenger.

psUniqID

The field identifies the booking unique within the whole external system. The field is used as a cross-reference to obtain detailed information about all the transactions recorded on a booking.

pnEvtID

The field identifies the unique event identification number. This ID can be obtained through GetEvent WebMethod. The field is an internal, unique event number.

psPriceCategory

The field identifies the Price Category. This Price Category can be obtained through GetEvent WebMethod message. This field is an internal, unique price category code.

psPersonGroup

The field identifies the Person Group. This Person Group can be obtained through GetEvent WebMethod message. This field is an internal, unique person group code.

pnTicket

The field identifies the number of tickets to book.

psNotes

The field identifies the additional information sent by third-party.

psPin

The field identifies the telephone PIN code of the reservation account. The valid character is 0,1,2,3,4,5,6,7,8,9. Leading zero to support depends on SPMS Parameter setting.

psSource

The field identifies the source of the booking. Eg: Workstation Id, Kiosk Id, etc. or any other details describing the location where the booking was made.

pbForceBooking

True-Allow posting even the guest do not have credit limit or posting is disabled (This only apply to check-in guest only), False-Normal posting

pbIsFixedSeating

True-Fixed Seating assignment booking, False – regular free seating booking

pnSeatID

The field identifies the unique seat identification number. This ID can be obtained through GetSeatingZoneAvailability WebMethod. The field is an internal, unique seat number.

pnPriceID

The field identifies the unique pricing setup identification number. This ID can be obtained through GetEvent WebMethod. The field is an internal, unique pricing setup number.

Return Value

CResponseXml.bSuccess = False when input values are invalid or no record found.

CResponseXml.bSuccess = True and CResponseXML.oTables(0) = ADO.NET *data table* when input values are valid.

ADO.NET DataTable field structure (It will always return only 1 record when input is valid)

Code	Type	Description
AccID	Integer	Account Posted

Code	Type	Description
Balance	Double	Account Balance
CruiseID	Integer	Posted Cruise ID

AccID

The account posted can be different from the pnAccID pass in if the pbForceBooking is set to *True* and the said account does not exist and not allow to do posting the return value will be internal system error account id.

Balance

The field identifies the balance after the posting is applied. This field can return positive (account is to be invoiced) or negative (account prepaid) value.

CruiseID

The field identifies the posted cruise id.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("EvtBooking", "SESSIONID", New
Object() {12345, 37464, 245457, "123", "A", 1, "", "", "", False})
```

For fixed seating assignment bookings:

```
oResponse = goWS.FidelioSPMSWSXML("EvtBooking", "SESSIONID", New
Object() {12345, 37464, 245457, "123", "A", 1, "", "", "", False,
True, 802, 762})
```

22. Function: SpaBooking

This function makes a single or Packaged Treatment spa booking in SPMS.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="SpaBooking", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	Unique Guest ID	✓
pnLocation	Integer	Location ID	✓
pnItem	Integer	Treatment Item ID	✓
pdDate	Date	Treatment Date and Time	✓
psNotes	String(255)	Notes (Default Empty)	optional
psPin	String(4)	Pin Code (Default Empty)	optional
psSource	String(10)	Booking Source (Default Empty)	optional
pbForceBooking	Boolean	True-Allow posting even the guest do not have credit limit or posting is disable, False – Normal posting	✓
pbIsUnassignedBooking	Boolean	True-Allow booking without Treatment Date and Time in order to be manually confirmed onboard, False-Regular Booking with Treatment Date and Time	✓
pnPackageID	Integer	Package ID	optional
pnPackageControlNo	Integer	Unique ID Grouping Package Treatments and Retail Items	optional

pnAccID

Unique Guest ID, return from SearchPassenger.

pnLocation

The field identifies the unique location identifier. The field is an internal, unique code. This value is retrieved from SPAlocation message type. For Package Treatments, the value is 0, because originally Packages can contain Treatments from multiple/different Locations. In this case, the function will automatically find the appropriate Location schedule for the requested Date and Time.

pnItem

The field identifies the unique treatment item identification. The field is an internal, unique code. This field is retrieved from SPATreatmentItem.

pdDate

The field identifies the date and time which the treatment takes place. This field is retrieved from SPATreatmentAvailability. If **pbIsUnassignedBooking** is True, then **pdDate** must be empty.

psNotes

The field identifies the additional information send by 3rd party.

psPin

The field identifies the telephone PIN code of the reservation account. The valid character is 0,1,2,3,4,5,6,7,8,9. Leading zero to support depends on SPMS Parameter setting.

psSource

The field identifies the source of the booking. Eg: Workstation Id, Kiosk Id, etc. or any other details describing the location where the booking was made.

pbForceBooking

True-Allow posting even the guest do not have credit limit or posting is disabled (This only apply to check-in guest only), False-Normal posting

pbIsUnassignedBooking

True-Allow booking without Treatment Date and Time in order to be manually confirmed onboard, False – Regular Booking with Treatment Date and Time

pnPackageID

The field identifies the unique Package identification. The field is an internal, unique code. This value is retrieved from GetSPAPackages WebMethod.

pnPackageControlNo

The field identifies the grouping of Treatments and Retail Items that belong to the same Package and are sold together in one transaction. When booking 1st Package Treatment, this field must always be 0, in order to return the new Package ControlNo value upon Booking of the 1st Package Treatment with return value CResponse.oObj(1). For the rest of Treatments Bookings, this value must contain the same Package ControlNo as returned after the 1st Package Treatment Booking.

Return Value

CResponseXml.bSuccess = True when Booking is successful,

CResponse.oObj(0) return the booking id (spa_id)

CResponse.oObj(1) return the Package ControlNo (spa_control)

CResponseXml.bSuccess = False when Booking has failed

for example, for regular single Treatments

```
oResponse = goWS.FidelioSPMSWSXML("SpaBooking", "SESSIONID", New
Object() {12345, 37464, 1, 123, #1/1/2011 3:00 pm#, "", "", "", False, False})
```

for example, for Unassigned single Treatments (without Treatment Date & Time assignment)

```
oResponse = goWS.FidelioSPMSWSXML("SpaBooking", "SESSIONID", New
Object() {12345, 37464, 1, 123, "", "", "", "", False, True})
```

for example, for 1st regular Package Treatment

```
oResponse = goWS.FidelioSPMSWSXML("SpaBooking", "SESSIONID", New
Object() {12345, 37464, 0, 123, #1/1/2011 3:00 pm#, "", "", "", False, False, 4, 0})
```

CResponse.oObj(0) return the booking id (spa_id) = 1342

CResponse.oObj(1) return the Package ControlNo (spa_control) = 1341

for example, for rest of regular Package Treatments

```
oResponse = goWS.FidelioSPMSWSXML("SpaBooking", "SESSIONID", New
Object() {12345, 37464, 0, 133, #1/1/2011 3:00 pm#, "", "", "", False, False, 4, 1341})
```

for example, for 1st Unassigned Package Treatment

```
oResponse = goWS.FidelioSPMSWSXML("SpaBooking", "SESSIONID", New
Object() {12345, 37464, 0, 123, "", "", "", "", False, True, 4, 0})
```

CResponse.oObj(0) return the booking id (spa_id) = 1342

CResponse.oObj(1) return the Package ControlNo (spa_control) = 1341

for example, for rest of Unassigned Package Treatments

```
oResponse = goWS.FidelioSPMSWSXML("SpaBooking", "SESSIONID", New
Object() {12345, 37464, 0, 133, "", "", "", "", False, True, 4, 1341})
```

23. Function: SpaBookingPackageRetail

This function creates a spa package retail booking in SPMS after all Package Treatments Bookings have been completed.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="SpaBookingPackageRetail", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	Unique Guest ID	✓
pnRetailItem	Integer	Retail Item ID	✓
pnPackageID	Integer	Package ID	✓
pnPackageControlNo	Integer	Unique ID Grouping Package Treatments and Retail Items	✓
psNotes	String(255)	Notes (Default Empty)	optional
psPin	String(4)	Pin Code (Default Empty)	optional
psSource	String(10)	Booking Source (Default Empty)	optional
pbForceBooking	Boolean	True-Allow posting even the guest do not have credit limit or posting is disable, False – Normal posting	✓

pnAccID

Unique Guest ID, return from SearchPassenger.

pnRetailItem

The field identifies the unique retail item identification. The field is an internal, unique code. This field is retrieve from GetSPAPackageItems or GetSPAPackageItems ForPeriod.

pnPackageID

The field identifies the unique Package identification. The field is an internal, unique code. This value is retrieved from GetSPAPackages WebMethod.

pnPackageControlNo

The field identifies the grouping of Treatments and Retail Items that belong to the same Package and are sold together in one transaction. Since all included Package Retail Items can only be booked after all Package Treatments have been booked, the Package Control No is already known because it has already been returned after the 1st Package Treatment Booking.

psNotes

The field identifies the additional information send by 3rd party.

psPin

The field identifies the telephone PIN code of the reservation account. The valid character is 0,1,2,3,4,5,6,7,8,9. Leading zero to support depends on SPMS Parameter setting.

psSource

The field identifies the source of the booking. Eg: Workstation Id, Kiosk Id, etc. or any other details describing the location where the booking was made.

pbForceBooking

True-Allow posting even the guest do not have credit limit or posting is disabled (This only apply to check-in guest only), False-Normal posting

Return Value

CResponseXml.bSuccess = True when Booking is successful,

CResponse.oObj(0) return the booking id (spa_id)

CResponseXml.bSuccess = False when Booking has failed

for example, for 1st Package Treatment

```
oResponse = goWS.FidelioSPMSWSXML("SPABookingPackageRetail",
"SESSIONID", New Object() {12345, 123, 4, 1341, "", "", "", False})
```

24. Function: UpdateInvoiceStatus

This function update the Invoice batch print status in SPMS.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="UpdateInvoiceStatus", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	Unique Guest ID	✓
pbBatchPrint	Boolean	True – Print in Quick Billing Screen False – Do not print in Quick Billing Screen	✓
psEMail	String(72)	Ship Email Address	✓

The following is a description of the parameters.

pnAccID

Unique Guest ID, return from SearchPassenger.

pbBatchPrint

True – Print in Quick Billing Screen

False – Do not print in Quick Billing Screen

psEMail

e-Mail address to send the invoice to.

Return Value

CResponseXml.bSuccess = True when UpdateInvoiceStatus is successful

CResponseXml.bSuccess = False when UpdateInvoiceStatus has failed

for example,

```
oResponse = goWS.FidelioSPMSWSXML("UpdateInvoiceStatus",
"SESSIONID", New Object() {12345, True, "ship@ship.com"})
```

25. Function: GetMicrosAdvanceDiscount

This function gets the list of eligible advance micros discount list.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="GetMicrosAdvanceDiscount", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	Unique Guest ID	✓

The following is a description of the parameters.

pnAccID

Unique Guest ID, return from GuestSearch.

Return Value

CResponseXml.bSuccess = True when GetMicrosAdvanceDiscount is successful,
CResponse.oObj return list of discount in string separate by ASCII 10, it mainly for display purpose only.

CResponseXml.bSuccess = False when GetMicrosAdvanceDiscount has failed

for example,

```
oResponse = goWS.FidelioSPMSWSXML("GetMicrosAdvanceDiscount", "",  
New Object() {12345})
```

26. Function: GetPackageInfo

This function gets the list of Package Plan assign to the passenger.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="GetPackageInfo", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	Unique Guest ID	✓
pbIncludeDisablePackage	Boolean	True=Include Disable Package False=Just return active package	optional

The following is a description of the parameters.

pnAccID

Unique Guest ID, return from GuestSearch.

Return Value

CResponseXml.bSuccess = False when GetPackageInfo has failed

CResponseXml.bSuccess = True when GetPackageInfo is successful, CResponse.oDataset will have 2 DataTables.

ADO.NET DataTable field structure for the first data table

Code	Type	Description
PPN_NAME	String	Name of the Package Plan
PPN_DAY_CREDIT	Double	Package Total
PPP_DEBIT	Double	Package Used
PPP_BOOKMARK	Integer	A point to the record position of the second data table
PPP_SELECTED	Integer	Record filtering, when 0 should hide the record from the second data table, however, the implementation is up to the client
PPN_USE_DEP_TOTAL	Integer	1-Different Department Total has its own limit
PPP_ID	Integer	Unique Package ID
PPN_FLEX_PACKAGE	Integer	Flexible Package Flag, the guest will need to choose the available department from the setup
AvailableBalance	Double	Available Balance = PPN_DAY_CREDIT - PPP_DEBIT

ADO.NET DataTable field structure for the second data table

Code	Type	Description
DEP_PPP_ID	Integer	Unique Package ID = PPP_ID of the first data table
DEP_ID	String	Department ID or Main Department ID
DEP_NAME	String	Department Name or Main Department Name
DEP_TOTAL	Double	This will be the individual department total when PPN_USE_DEP_TOTAL = 1
DEP_MAIN	Boolean	Indicate this record is the Department or Main Department
DEP_DISC	Double	Discount Percentage that the posting amount will go to package plan

for example,

```
oResponse = goWS.FidelioSPMSWSXML("GetPackageInfo", "", New  
Object() {12345})
```

27. Function: GetCreditCardInfo

This function gets the list of register credit card assign to the passenger.

psFunction="GetCreditCardInfo", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	Unique Guest ID	✓

The following is a description of the parameters.

pnAccID

Unique Guest ID, return from GuestSearch.

Return Value

CResponseXml.bSuccess = False when GetCreditCardInfo has failed

CResponseXml.bSuccess = True when GetCreditCardInfo is successful,
CResponse.oDataset will have 2 DataTables.

ADO.NET DataTable field structure for first data table, Credit Card Infomation

Code	Type	Description
CRD_NO	String	Credit Card No, the card number will always mask to XX*****XXXX
CRD_EXP	String	Expiry Date in MMYY format
CRD_NAME	String	Credit Card owner name
CRD_ACTIVE	String	Yes or No
CRD_LIMITS	String	'No Limit' or the credit limit amount
CRD_ID	Integer	Unique ID
CRD_INVOICE	String	'All' or the individual invoice separated by ','
CRD_DCC	String	Y or N for Dynamic Currency Exchange
CRD_PARCELADO	String	Y or N special Parcelado flag currently unused
CRD_SIG_ID	String	Yes or No, indicate the signature image exists
DCC_EXRATE	Double	Exchange Rate
CRD_CUR	String	Currency code
SIGN_ID	Integer	Signature Unique ID

ADO.NET DataTable field structure for the second data table

Code	Type	Description
CRD_NO	String	Credit Card No, the card number will always mask to XX*****XXXX
CRD_EXP	String	Expiry Date in MMYY format
CRD_NAME	String	Credit Card owner name
CRD_ID	Integer	Unique ID
CRD_ACTIVE	String	Yes or No
CRD_REWARDS	Integer	1 - Reward Card, 2 - Gift Card

for example,

```
oResponse = goWS.FidelioSPMSWSXML("GetCreditCardInfo", "", New  
Object() {12345})
```

28. Function: GetAccBalance

This function gets the account outstanding balance.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="GetAccBalance", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	Unique Guest ID	✓
pbPreBill	Boolean	True – Get the Pre Cruise Balance, False – Get the account balance	✓

The following is a description of the parameters.

pnAccID

Unique Guest ID, return from GuestSearch.

pbPreBill

True – Get the Pre Cruise Balance, False – Get the account balance

Return Value

CResponseXml.bSuccess = True when GetAccBalance is successful, CResponse.oObj returns an Array with 2 value, the first value is the PreCruse Balance or Acc Balance depend on pbPreBill and the second value is Non-Refundable Credit Pre Cruise Balance or Non-Refundable Credit Balance.

CResponseXml.bSuccess = False when GetAccBalance has failed

for example,

```
oResponse = goWS.FidelioSPMSWSXML("GetAccBalance", "", New  
Object() {12345, False})
```

29. Function: GetFreeCabin

This function gets the available cabin for booking.

psFunction="GetFreeCabin", below is the list of psParam or poParam

Parameter	Type	Description	Required
psCabinType	String	Cabin Type, "P" – Passenger, "C" - Crew	✓
pdEmbDate	Date	Embarkation Date	✓
pdDisDate	Date	Disembarkation Date	✓
pdFromDoneDate	Date	Work Order Completed From Date	Optional
pdToDoneDate	Date	Work Order Completed To Date	Optional
psWorkOrderDone	String	Completed Work Order Task Code, link to TYP_MWT.TYP_ART, default value XXX	Optional
psWorkOrderNotDone	String	Unfinish Work Order Task Code, link to TYP_MWT.TYP_ART, default value XXX	Optional
psCabinCategory	String	Cabin Category	Optional
psFeature	String	Cabin Feature	Optional
psPartialCabin	String	First few digit of partial cabin number	Optional
psDeck	String	Cabin Deck	Optional
psSpecialNeed	Enum	0-All 1-With Special Need 2-Without Special Need	Optional

Return Value

CResponseXml.bSuccess = False when GetFreeCabin has failed

CResponseXml.bSuccess = True when GetFreeCabin is successful, CResponse.oDataset will have 1 DataTables.

ADO.NET DataTable field structure for the data table.

Code	Type	Description
CAB_ID	String	Cabin Number
TYP_COMMENT	String	Cabin Category Description
CAB_DECK	String	Cabin Deck Code

Code	Type	Description
CAB_STATUS	String	Cabin Status
CAB_BEDS	Integer	Number of bed in this cabin
CAB_TYPE	String	Cabin Category Code
CAB_DECK	String	Cabin Deck
CAB_CONNECTED	String	Connected Cabin Number
CAB_FEATURE	String	List of Cabin Feature separated by ","
CAB_AVAILABLE	Integer	Available Berth
CAB_SORT	Integer	Sort Priority
CAB_SPECIALNEED	Integer	0-Normal Cabin, 1-cabin with special needs feature
CAB_DECK_NAME	String	Cabin Deck Description

for example,

```
oResponse = goWS.FidelioSPMSWSXML("GetFreeCabin", "", New
Object() {"P", DateTime.SpecifyKind(#1/1/2011|,
DateTimeKind.Unspecified),
DateTime.SpecifyKind(#2/1/2011#, DateTimeKind.Unspecified)})
```

30. Function: GetPeopleCount

This function gets the onboard/shoreside count as per the FC Security module.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="GetPeopleCount", no parameter

Return Value

CResponseXml.bSuccess = False when not connection to the DB.

CResponseXml.bSuccess = True and CResponseXML.PeopleCount.

PeopleCount field structure

Parameter	Type	Description
nPaxTotal	Integer	Total Passenger
nPaxShoreside	Integer	Total Passenger shore side
nPaxOnboard	Integer	Total Passenger on board
nPaxOvernight	Integer	Total Passenger shore side with overnight tour
nPaxExpected	Integer	Total expected passenger to check-in today
nPaxDisembarked	Integer	Total passenger disembark today
nResTotal	Integer	Total Resident
nResShoreside	Integer	Total Resident shore side
nResOnboard	Integer	Total Resident on board
nResOvernight	Integer	Total Resident shore side with overnight tour
nResExpected	Integer	Total expected resident to check-in today
nResDisembarked	Integer	Total resident disembark today
nCrwTotal	Integer	Total Crew
nCrwShoreside	Integer	Total Crew shore side
nCrwOvernight	Integer	Total Crew on board
nCrwOnboard	Integer	Total Crew shore side with overnight tour
nCrwExpected	Integer	Total expected crew to check-in today

Parameter	Type	Description
nCrwDisembarked	Integer	Total crew disembark today
nTotal	Integer	Total
nTotalOnboard	Integer	Total shore side
nTotalShoreside	Integer	Total on board
nTotalOvernight	Integer	Total shore side with overnight tour
nTotalExpected	Integer	Total expected to check-in today
nTotalDisembarked	Integer	Total disembark today
nVisTotal	Integer	Total visitor on board
nPaxNotPassImmigration	Integer	Total passenger not yet pass immigration gate
nCrewNotPassImmigration	Integer	Total crew not yet pass immigration gate
nResNotPassImmigration	Integer	Total resident not yet pass immigration gate
nPaxExcludeImmigration	Integer	Total passenger no need to pass immigration gate
nCrewExcludeImmigration	Integer	Total crew no need to pass immigration gate
nResExcludeImmigration	Integer	Total resident no need to pass immigration gate
sPortName	String	Port Description
oVisitor	Array or CVisitorDetailCount	This only apply to Hurtigruten only

CVisitorDetailCount

Parameter	Type	Description
Code	String	Visitor Category Code
Description	String	Visitor Category Description
Count	Integer	Total Visitor on board

for example,

```
oResponse = goWS.FidelioSPMSWSXML("GetPeopleCount", "SESSIONID",
New Object() {})
```

31. Function: ChangeBoardStatus

This function will toggle the onboard/offboard status of the passenger.

psFunction="ChangeBoardStatus", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	Unique Account ID	✓
pbSwipe	Boolean	True, the info is capture using swipe card, False, the info is manually entered.	✓
pbResponseYes	Boolean	Default response to confirmation message.	✓

The following is a description of the parameters.

pnAccID

Unique Account ID

pbSwipe

True, the info is capture using swipe card,
False, the info is manually entered.

pbResponseYes

Default response to confirmation message.

for example,

Warning! Resident is NOT expected today. Are you sure you want to check-in?

Do you want to Check-In <Guest Name>?

This person is on duty and ashore denied, do you want to override the onboard status?

This person is ashore denied, do you want to override the onboard status?

Also, user define security action message prompt

Return Value

CResponseXml.bSuccess = False when Status change failed.

CResponseXml.bSuccess = True when Status change successful.

In both instance, CResponse.oObj return the guest onboard status 0 – Onboard, 1- Shore Side

for example,

```
oResponse = goWS.FidelioSPMSWSXML("ChangeBoardStatus",
"SessionID", New Object() {123456, True, True})
```

37. Function: AdvanceGuestSearch

This function search for a guest with various criteria from the SPMS system

psFunction="AdvanceGuestSearch", below is the list of psParam or poParam

Parameter	Type	Description	Required
psCabCategory	String	Cabin Category	✓
psNationality	String	Nationality	✓
psVipStatus	String	Guest Classification	✓
psPosDiscountLevel	String	Loyalty Discount Level	✓
pnGrpID	Integer	Group ID	✓
peGuestType	GuestType	Guest Type Enumerator	✓
peReservationType	ReservationType	Reservation Type Enumerator	✓
pdDate	Date	Embarkation Date	✓
pnScdID	Integer	Current Port ID	optional
peOnboardStatus	OnboardStatus	0 – All 1 – Onboard 2 – Shoreside	optional

The following is a description of the parameters.

psCabCategory

This is the search the guest stays in the specific cabin category, enter blank to skip this criteria.

psNationality

This is the search the guest nationality, enter blank to skip this criteria.

psVipStatus

This is the search the guest classification, enter blank to skip this criteria.

psPosDiscountLevel

This is the search the guest POS Discount Level, enter blank to skip this criteria.

pnGrpID

This is the search the guest base on the group, enter 0 to skip this criteria.

peGuestType Enumerator

Guest 0 → Search guest matching search criteria

Crew	1	→ Search crew matching search criteria
Visitor	2	→ Search visitor matching search criteria
All	3	→ Search guest,crew,visitor matching search criteria

peReservationType Enumerator

Reserve = Search only passenger with reservation status only (Note visitor always have reservation status only)

Reserve	0	→ Reservation passenger
CheckIn	1	→ Search only passenger that had check-in
All	2	→ Search both check-in and reserve passenger
CheckOut	3	→ Search check-out passenger only
ReserveFCManagement	4	→ Reservation passenger, for shore viewer
CheckInFCManagement	5	→ Search only passenger that had check-in, for shore viewer
CheckOutFCManagement	6	→ Search check-out passenger only, for shore viewer
Cancelled	7	→ Cancelled reservation passenger.

pdDate

Embarkation date, if you want to search for all guest regardless of the embarkation date, pass in #12:00:00AM#

Return Value

CResponseXml.bSuccess = False when input values are invalid or no record found.

CResponseXml.bSuccess = True and CResponseXML.oTables(0) = ADO.NET *data table* when input values are valid. The data table will contain all fields in uxP and res table, please refer to SPMS Data Dictionary for details of the fields)

for example,

```
oResponse = goWS.FidelioSPMSWSXML("AdvancedGuestSearch",
"SessionID", New Object() {"D04", "", "", "", 0, 3, 0, #01-01-2011#})
```

39. Function: AddRouting

This function allows you to add the routing, please take note we support both all department route from passenger A to passenger B + route specify department from passenger A to passenger C, the individual department routing will take priority.

For JSON the array of the string will be a string separated by “,”, each string must be start with Open Double Quote and end with Open Double Quite.

for example,

“A,”,”B,” = 2 Element

Element 1 = A,”

Element 2 = B,

psFunction=“AddRouting”, below is the list of psParam or poParam

Parameter	Type	Description	Required
pnBuyer	Integer	Unique Buyer Account ID	✓
pnPayer	Integer	Unique Payer Account ID	✓
pnWindow	Integer	Invoice Window (0 to 3) only	✓
psNote	String(40)	Reason of the routing	✓
psDept	Array of String(10)	Array of department	✓

The following is a description of the parameters.

pnBuyer

Unique Buyer Account ID

pnPayer

Unique Payer Account ID

pnWindow

Invoice Window, valid value 0 to 3, the default is 0, if the buyer and payer is the same then the valid value is 1 to 3.

psNote

Reason of the routing can be empty

psDept

Array of the department, if the routing is all department, please pass in nothing or an empty array. Please note if the department pass in does not exist, it will just skip, no error will be return.

Return Value

CResponseXml.bSuccess = False when Add Routing failed.

CResponseXml.bSuccess = True when Add Routing successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("AddRouting", "SessionID", New  
Object() {12345,12346,0,"Tesing",New String() {"9011","9012"}})
```

40. Function: DeleteRouting

This function will delete the routing, you can either delete all routing or delete individual department routing, delete all routing will also delete all individual department routing.

For JSON the array of the string will be a string separated by “,”, each string must start with Open Double Quote and end with Open Double Quite.

for example,

“A,”,”B,” = 2 Element

Element 1 = A,”

Element 2 = B,

psFunction=“DeleteRouting”, below is the list of psParam or poParam

Parameter	Type	Description	Required
psSearchStr	String	Unique Buyer Account ID or Board Card or PGID or Pax ID depends on the peSearchType	✓
psDept	Array of String(10)	Array of department	✓
peSearchType	Enum	InternalID = 0 'res_acc PGID = 1 'res_pgid BoardCard = 2 'res_boardcc PaxID = 3 'res_referenz	optional

The following is a description of the parameters.

psSearchString

Unique Buyer Account ID or
Board Card or
PGID or
Pax ID depends on the peSearchType

psDept

An array of the department, if the routing is all department, please pass in nothing or an empty array. Please note if the department pass in does not exist, it will just skip, no error will be return.

peSearchType

InternalID = 0 'res_acc
PGID = 1 'res_pgid
BoardCard = 2 'res_boardcc

PaxID = 3 'res_referenz

Return Value

CResponseXml.bSuccess = False when Delete Routing failed.

CResponseXml.bSuccess = True when Delete Routing successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("DeleteRouting", "SessionID",
New Object() {12345,2,New String() {"9011","9012"} })
```

41. Function: SearchGangwaylog

This function gets the gangway activities from SPMS.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="SearchGangwaylog", below is the list of psParam or poParam

Parameter	Type	Description	Required
pdFromDate	Date	From date & time	✓
pdToDate	Date	To date & time	✓
pnAccID	Integer	Unique Account ID	✓
psLocation	String	Gangway location	✓
psMovement	String	Movement	✓
psAccType	String	Account Type	✓
psCab	String	Cabin Number	✓
psName	String	Name	✓
peSortType	Integer	Sort Type	optional

The following is a description of the parameters.

pdFromDate

From date and time

pdToDate

To date and time

pnAccID

Unique Account ID, this is optional, if you want to search all guest, pass in 0

psLocation

This is the location where they pass the gangway

psMovement

Pass in blank for all movement

Below is the valid value

IMMIGRATION UNCHECK

IMMIGRATION CHECK

Going Shore-side

Coming On-board

psAccType

Account Type, pass in blank for all

Below is the valid value

C

G

V

psCab

Cabin number

psName

Guest Name, if "," exists, all text before "," will be first name, all text after "," will be the last name.

If "," does not exist we will search the last name only

peSortType

0 – Sort by GLG_ID ASC

1 – Sort by GLG_ID DESC

2 – Sort by GLG_DATE ASC

3 – Sort by GLG_DATE DESC

Default = 0

Return Value

CResponseXml.bSuccess = False when SearchGangwaylog has failed

CResponseXml.bSuccess = True when SearchGangwaylog is successful,

CResponse.oDataset will have 1 DataTables.

ADO.NET DataTable field structure for data table.

Code	Type	Description
GLG_DATE	Date	Movement Date and Time
GLG_STATION	String	PC Name where the movement is done
GLG_LOCATION	String	Location where the movement takes place
GLG_MOVEMENT	String	Movement direction
UXP_A_FSTN	Integer	First Name
UXP_A_NAME	String	Last Name
UXP_A_TAG	String	Account Type P-Passenger,C-Crew,V-Visitor
RES_CAB	String	Cabin Number

Code	Type	Description
GLG_SHORE_DENIED	Integer	Flag that overrides shore leave denied passenger
GLG_SWIPE	String	Yes-Card is swipe,No-Manual Enter
TYP_COMMENT	String	Port Name (Only exists in Ferry Mode)
RES_ACC	Integer	Unique Account ID

for example,

```
oResponse = goWS.FidelioSPMSWSXML("SearchGangwaylog", "", New
Object() { DateTime.SpecifyKind(#1/1/2011 1:00:00 pm|,
DateTimeKind.Unspecified),
DateTime.SpecifyKind(#2/1/2011 6:00:00 pm|,
DateTimeKind.Unspecified),0, "", "", "", "", ""})
```

42. Function: UpdateTravelDoc

This function will add or update the travel document.

psFunction="UpdateTravelDoc", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnVisID	Integer	Unique Travel Document ID (0 for add new record)	✓
pnAccID	Integer	Unique Account ID	✓
psCountry	String(6)	Country	✓
psNumber	String(20)	Document Number	✓
psVisType	String(6)	Internal Document Type	✓
pdIssueDate	Date	Issue Date	✓
psIssuePlace	Date	Issue Place	✓
pdExpiryDate	Date	Expiry Date	✓
psVid	String(100)	Unique External ID, for Data Import	✓
pdRMUDate	Date	RMU Date	✓
psDocType	String(6)	Document Type	✓
psFirstName	String(40)	First Name	✓
psMiddleName	String(20)	Middle Name	✓
psLastName	String(40)	Last Name	✓
pdBirthDate	Date	Birth Date	✓
psRemoteID	String(30)	Remote ID	✓
psMrz1	String(100)	MRZ 1	✓
psMrz2	String(100)	MRZ 2	✓
psMrz3	String(100)	MRZ 3	✓
psDocName	String(100)	Document Name	✓
psGUID	String(50)	GUID, for CMS	✓
pnEntry	Integer	Number of Allow Entry	✓
pdValidFrom	Date	Valid From	✓
pnDurationOfStay	Integer	Duration of Stay	✓
pbyDocImage	Byte Array	Document Image	✓
pbyDocPhoto	Byte Array	Document Photo	✓
pbyMultiPageDocImage	Byte Array	Multipage Scan document image	✓

Parameter	Type	Description	Required
psFileName	String(100)	Original File Name for file upload	✓
pbAssignPhotoToAccount	Boolean	True – Assign the Document Photo to Guest Photo	✓

Return Value

CResponseXml.bSuccess = False when Update/Add failed.

CResponseXml.bSuccess = True when Update/Add successful, CResponseXML.oObj = vis_id (Unique Document ID)

for example,

```
oResponse = goWS.FidelioSPMSWSXML("UpdateTravelDoc", "SessionID",
New Object()
{12345,1234576,"US","B8760","P",DateTime.SpecifyKind(#01-01-2009#,
DateTimeKind.Unspecified), "Florida", DateTime.SpecifyKind(#01-01-
2019#, DateTimeKind.Unspecified), "", 
DateTime.SpecifyKind(#12:00:00 AM#, DateTimeKind.Unspecified),
"P", "FirstName", "", "LastName", DateTime.SpecifyKind(#01-01-
1960#, DateTimeKind.Unspecified), "", "", "", "Passport", "", 
999, DateTime.SpecifyKind(#01-01-2009#, DateTimeKind.Unspecified),
30, Nothing, Nothing, Nothing, "", False)
```

43. Function: DeleteTravelDoc

This function will delete the travel document.

psFunction="DeleteTravelDoc", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnVisID	Integer	Unique Travel Document ID	✓

The following is a description of the parameters.

pnVisID

Unique Travel Document ID

Return Value

CResponseXml.bSuccess = False when Delete failed.

CResponseXml.bSuccess = True when Delete successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("DeleteTravelDoc", "SessionID",  
New Object() {12345})
```

44. Function: UpdateAmenity

This function will add or update the guest amenity.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="UpdateAmenity", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAmeID	Integer	Unique Amenity ID(0 for add new record)	✓
pnAccID	Integer	Unique Account ID	✓
psCode	String(6)	Amenity Code	✓
psNote	String(2500)	Amenity Description	✓
pnAmount	Double	Amenity Price each	✓
pnQuantity	Integer	Amenity Quantity	✓
psSender1	String(255)	Sender 1	✓
psSender2	String(30)	Sender 2	✓
psMessage	String(255)	Message for sender	✓
pdDeliveryDate	Date	Expected Delivery Date and Time	✓
psLocation	String(30)	Location	✓
psOccurrence	String(10)	Occurrence	✓
psExtCode	String(15)	External Code	✓
pnCost	Double	Cost	✓
psComments	String(2500)	Comments	✓
psExtID	String(20)	External ID	✓
psVID	String(100)	Unique External ID	✓
psOdiID	String(6)	Delivery Division	✓
psCurID	String(6)	Currency Code	✓
psFlag	String(1)	Flag	✓

Return Value

CResponseXml.bSuccess = False when Update/Add failed.

CResponseXml.bSuccess = True when Update/Add successful, CResponseXML.oObj = ame_id (Unique Amenity ID)

for example,

```
oResponse = goWS.FidelioSPMSWSXML("UpdateAmenity", "SessionID",
New Object() {12345,1234576,"Code","Note",1.23,1, "Sender1",
"Sender2", "Message", DateTime.SpecifyKind(#01-01-2013 3:00:00
pm#, DateTimeKind.Unspecified), "Location", "Once", "ExtCode",
0.45, "Comments", "ExtID", "", "GRP", "US", ""})
```

45. Function: DeleteAmenity

This function will delete the guest amenity.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="DeleteAmenity", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAmeID	Integer	Unique Amenity ID	✓

Return Value

CResponseXml.bSuccess = False when Delete failed.

CResponseXml.bSuccess = True when Delete successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("DeleteAmenity", "SessionID",  
New Object() {12345})
```

46. Function: UpdateSpecialRequest

This function will add or update the guest special request.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="UpdateSpecialRequest", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnSrtD	Integer	Unique Special Request ID(0 for add new record)	✓
pnAccID	Integer	Unique Account ID	✓
psCode	String(6)	Special Request Code	✓
psVid	String(100)	Special Request Unique External ID	✓
psDescription	String(1000)	Special Request Description	✓
pnExtID	Double	Special Request External ID	✓
psExtCode	String(15)	Special Request External Code	✓
pnQuantity	Integer	Special Request Quantity	✓
pdDeliveryDate	Date	Expected Delivery Date and Time	✓
psLocation	String(30)	Location	✓
psOdiID	String(6)	Delivery Division	✓
pdEventDate	Date	Special Request Event Date	✓

Return Value

CResponseXml.bSuccess = False when Update/Add failed.

CResponseXml.bSuccess = True when Update/Add successful. CResponseXML.oObj = srt_id (Unique Special Request ID)

for example,

```
oResponse = goWS.FidelioSPMSWSXML("UpdateSpecialRequest",
"SessionID", New Object()
{12345,1234576,"Code","Vid","Description", 2, "ExtCode", 1,
DateTime.SpecifyKind(#01-01-2013 3:00:00 pm|,
DateTimeKind.Unspecified), "Location", "GRP",
DateTime.SpecifyKind(#01-01-2013 3:00:00 pm|,
DateTimeKind.Unspecified))
```

47. Function: DeleteSpecialRequest

This function will delete the guest amenity.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="DeleteSpecialRequest", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnSrtID	Integer	Unique Special Request ID	✓

Return Value

CResponseXml.bSuccess = False when Delete failed.

CResponseXml.bSuccess = True when Delete successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("DeleteSpecialRequest",
"SessionID", New Object() {12345})
```

48. Function: UpdateWorkOrder

This function will add or update the maintenance work order.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="UpdateWorkOrder", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnMwrID	Integer	Unique Work Order ID(0 for add new record)	✓
psWorkOrder	String(20)	Work Order Number	✓
psPublicLocation	String(6)	Public Location, link to TYP_MWL.TYP_ART	✓
psCabin	String(20)	Cabin Number	✓
psTaskDesc	String(1000)	Task Description	✓
pnCompleteStatus	Integer	Completion Status must be 0, 25, 50, or 100 (This only applies to Insert new entry)	✓
psLocation	String(10)	Location, link to ARE_CODE	✓
psPictureFileName	String(50)	Filename of the picture file uploaded	✓
psTask	String(6)	Task Code, link to TYP_MWT.TYP_ART, default value XXX	✓
psType	String(6)	Task Type, link to TYP_WOT.TYP_ART, default value WOT01	✓
pnXDocID	Long	Unique XDOC ID, the table where the picture is store	✓
psPriority	String(6)	Priority Code, link to TYP_MPI.TYP_ART	✓
psLocationStatus	String(6)	Location Status, link to TYP MLS.TYP_ART	✓
pbyPicture	Byte Array	Picture File, only needs to send when the picture is added or update. Send nothing or empty array when no picture to update. Existing picture will not be delete even when no picture is send	✓

Parameter	Type	Description	Required
pbPrint	Boolean	Indicate to print the work order, PAR->Maintenance->Use Work Order Printer Service must be enabled in order to print	✓
psComment	String(2000)	Comment Field	✓
psReportByCabID	String(20)	Reported By Cabin Number	✓
pbRejected	Boolean	Rejected Status	✓
psReportByUser	String(50)	Reported By Person	Optional
pdReportedDate	Date	Reported Date	Optional

Note: psPublicLocation, psCabin and psLocation, only one of the three variable needs to pass in.

Return Value

CResponseXml.bSuccess = False when Update/Add failed.

CResponseXml.bSuccess = True when Update/Add successful.

CResponsesXml.oObj = mwr_id when bSuccess = True

Note:

1. pnXDocID = 0 and picture upload during update/insert mean the add new picture
2. pnXDocID = 0 and no picture upload during update mean remove picture.
3. pnXDocID = 0 and no picture upload during insert mean no picture.
4. pnXDocID > 0 and picture upload during update/insert mean overwrite the existing picture.
5. pnXDocID > 0 and no picture upload during update/insert mean use the existing picture.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("UpdateWorkOrder", "SessionID",
New Object() {12345,"1234576","LOC1","","Testing", 0, "", "", "XXX", "WOT01", 0, "1" , "1", Nothing, True)
```

49. Function: DeleteWorkOrder

This function will delete the maintenance work order.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="DeleteWorkOrder", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnMwrID	Integer	Unique Work Order ID	✓
psReason	String(1000)	Reason to delete	✓

Return Value

CResponseXml.bSuccess = False when Delete failed.

CResponseXml.bSuccess = True when Delete successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("DeleteWorkOrder", "SessionID",
New Object() {12345, "Testing"})
```

50. Function: UpdateCompleteStatus

This function will update the maintenance work order completion status.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="UpdateCompleteStatus", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnMwrID	Integer	Unique Work Order ID(0 for add new record)	✓
pnStatus	Integer	Completion Status, must be 0, 25, 50, or 100	✓
pdCompleteDate	Date	Completion Date, only use when pnStatus = 100	✓

Return Value

CResponseXml.bSuccess = False when Update failed.

CResponseXml.bSuccess = True when Update successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("UpdateCompleteStatus",
"SessionID", New Object() {12345, 100, DateTime.SpecifyKind(#01-01-2013 3:00:00 pm#, DateTimeKind.Unspecified)})
```

51. Function: UpdateDayNeeded

This function will update the maintenance work order day needed to complete the task.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="UpdateDayNeeded", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnMwrID	Integer	Unique Work Order ID(0 for add new record)	✓
pnDays	Double	Number of Days needed	✓

Return Value

CResponseXml.bSuccess = False when Update failed.

CResponseXml.bSuccess = True when Update successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("UpdateDayNeeded", "SessionID",  
New Object() {12345, 1.5})
```

52. Function: UpdateWorkOrderItem

This function will add or update the maintenance work order item require.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="UpdateWorkOrderItem", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnMwiID	Integer	Unique Work Order Item ID(0 for add new record)	✓
pnMwrID	Integer	Unique Work Order ID	✓
pnItemCode	Integer	Unique Maintenance Item ID, link to MIT_ID	✓
pnQuantity	Integer	Quantity	✓
pnPrice	Double	Price	✓
psRemark	String(500)	Remarks	✓

Return Value

CResponseXml.bSuccess = False when Update/Add failed.

CResponseXml.bSuccess = True when Update/Add successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("UpdateWorkOrderItem",
"SessionID", New Object() {12345,123457,1,1,2.0, "Testing")
```

53. Function: DeleteWorkOrderItem

This function will delete the maintenance work order item.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="DeleteWorkOrderItem", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnMwiID	Integer	Unique Work Order Item ID	✓

Return Value

CResponseXml.bSuccess = False when Delete failed.

CResponseXml.bSuccess = True when Delete successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("DeleteWorkOrderItem",
"SessionID", New Object() {12345})
```

54. Function: UpdateWorkOrderAssignment

This function will assign person/group to the maintenance work order.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="UpdateWorkOrderAssignment", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnMwaiD	Integer	Unique Work Order Assignment ID(0 for add new record)	✓
pnMwrID	Integer	Unique Work Order ID	✓
psAssignGroup	String(6)	Assignment Group, link to TYP_MWG.TYP_ART	✓
psAssignCrew	Integer	Unique Crew ID	✓
psRemark	String(1000)	Remarks	✓

Return Value

CResponseXml.bSuccess = False when Update/Add failed.

CResponseXml.bSuccess = True when Update/Add successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("UpdateWorkOrderAssignment",
"SessionID", New Object() {12345,123457, "1", 12345, "Testing")
```

55. Function: DeleteWorkOrderAssignment

This function will remove a person/group from the maintenance work order.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="DeleteWorkOrderAssignment", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnMwaID	Integer	Unique Work Order Assignment ID	✓

Return Value

CResponseXml.bSuccess = False when Delete failed.

CResponseXml.bSuccess = True when Delete successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("DeleteWorkOrderAssignment",
"SessionID", New Object() {12345})
```

56. Function: UpdateCabCleanStatus

This function will update the cabin clean status.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="UpdateCabCleanStatus", below is the list of psParam or poParam

Parameter	Type	Description	Required
psCabID	String(20)	Cabin Number	✓
psCabCleanStatus	String(2)	Available value is OD,OC,VD,VC,PU,FA,VF	✓

Return Value

CResponseXml.bSuccess = False when Update failed.

CResponseXml.bSuccess = True when Update successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("UpdateCabCleanStatus",
"SessionID", New Object() {"05002", "OD"})
```

60. Function: SearchWorkOrder

This function gets the maintenance work order from SPMS.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="SearchWorkOrder", below is the list of psParam or poParam

Please take note all the parameter is optional except pdFromDate and pdToDate, the more parameters you pass in the least record it will return.

For Array field, pass in empty array or Nothing to skip this checking

For Date field pass in 30-Dec-1899 if not require

For JSON the array of string will be a string separated by "", each string must start with Open Double Quote and end with Open Double Quite.

for example,

"A,"""","B," = 2 Element

Element 1 = A,"

Element 2 = B,

Parameter	Type	Description	Required
pdFromDate	Date	From date & time	✓
pdToDate	Date	To date & time	✓
pdCompleteFromDate	Date	Completion date & time from	✓
pdCompleteToDate	Date	Completion date & time to	✓
psWorkOrderTyp	Array of String	Work Order Type	✓
psCabin	Array of String	Cabin Location	✓
psPublicLocation	Array of String	Public Location	✓
psLocation	Array of String	Custom Location	✓
psTask	Array of String	Work Order Task	✓
psWorkGroup	Array of String	Work Order Assign Worker Group	✓
pnUsrCreate	Array of String	User ID which created the Work Order Although the data type is numeric, you must pass in as Array of String due to .NET limitation	✓

Parameter	Type	Description	Required
pnUsrAssign	Array of String	Work Order Assign to the Crew Although the data type is numeric, you must pass in as Array of String due to .NET limitation	✓
psPriority	Array of String	Priority	✓
pnMwrID	Array of String	Work Order Unique ID Although the data type is numeric, you must pass in as Array of String due to .NET limitation	✓
psMwrNo	Array of String	Work Order Number	✓
pnCompleteStatus	Array of String	Completion Status, Range 0,25,50,75,100 Although the data type is numeric, you must pass in as Array of String due to .NET limitation	✓
pbIncludePicture	Boolean	True = Will return the work order picture False = Will return nothing, this is for slow device, so it will need to look up the picture using WSF using the value WSF_XDOC_ID, default = True	optional
pbSortModDateAsc	Boolean	True it will sort the records by last modify date ASC False it will sort the records by last modify date DESC Default = True	optional

CResponseXml.bSuccess = False when SearchWorkOrder has failed

CResponseXml.bSuccess = True when SearchWorkOrder is successful,

CResponse.oDataset will have 4 DataTables.

ADO.NET DataTable field structure for first data table, Work Order

Code	Type	Description
MWR_CSTATUS	Integer	Completion Status Percentage 0,25,50,75 or 100
MWR_DATE	Date	Date Time the order created
MWR_LOCATION	String	Custom Location of the maintenance
MWR_LOCATIONCABIN	String	Cabin Number

Code	Type	Description
MWR_LOCATIONPUBLIC	String	Public Location
PRIORITY	String	Priority Description
MWR_TASK	String	Task Code
TSK_COMMENT	String	Task Name
MWR_TASKDESCR	String	Task Description
USR_LOGIN	String	User Login Name
MWR_TYPE	String	Work Order Type
WOT_NAME	String	Word Order Type Description
MWR_ID	Integer	Unique Work Order ID
MWR_WONUMBER	String	Work Order Number
ARE_CATEGORY	String	Custom Location Category
CAT_NAME	String	Custom Location Category Name
STATUS	String	Usable Status
XDOC_FILE	Byte Array	Picture of the work order
MWR_TIME_NEEDED	Double	Time Needed in Days
MWR_PICTUREFILE	String	File Name of the picture
MWR_COMMENT	String	Comment
MWR_CAB_ID	String	Report By Cabin Number
ARE_NAME	String	Custom Location Name
PUBLIC_NAME	String	Public Location Name
MWR_COMPLETEDATE	Date	Completion Date
MWR_PRINTED	Integer	Indicates how many times it printed
MWR_REJECTED	Boolean	True – Rejected
MWR_XDOC_ID	Long	The work order picture id = xdoc_id

ADO.NET DataTable field structure for second data table, Work Order Assignment

Code	Type	Description
MWA_ID	Integer	Unique Work Order Assignment ID
MWA_MWRID	Integer	Work Order ID
MWA_ASSIGNEDTOGROUP	String	Assign Group Code
MWA_ASSIGNEDTOWORKER	Integer	Unique Crew ID
MWA_ASSIGNEDWHEN	Date	Date and Time of assignment
MWA_REMARKS	String	Remarks

Code	Type	Description
CRW_NAME	String	Crew Name
MWR_GROUP	String	Group Description
USR_LOGIN	String	User Login Name

ADO.NET DataTable field structure for third data table, Work Order Assignment

Code	Type	Description
MWI_ID	Integer	Unique Work Order Item ID
MWI_MWRID	Integer	Work Order ID
MWI_ITEMCODE	String	Item Code
MWI_QUANTITY	Integer	Quantity Needed
MWI_PRICE	Double	Price of the item
MWI_REMARKS	String	Remarks
MIT_DESC	String	Item Description
MIT_GROUP	String	Item Group
MIT_STOCK	Integer	Quantity On Hand
TYP_COMMENT	String	Item Group Description

ADO.NET DataTable field structure for fourth data table, Work Order Additional Image

Code	Type	Description
MWP_ID	Integer	Unique Work Order Image ID
MWP_MWRID	Integer	Work Order ID
MWP_COMMENT	String	User Comment
MWP_FILENAME	String	Original Picture Filename, Info purpose
MWP_IMAGE	Byte Array	Additional Picture of the work order

for example,

```

oResponse = goWS.FidelioSPMSWSXML("SearchWorkOrder", "", New
Object() {DateTime.SpecifyKind(#1/1/2000|,
DateTimeKind.Unspecified),
DateTime.SpecifyKind(#1/1/2012#, DateTimeKind.Unspecified),
DateTime.SpecifyKind(DEFAULT_DATE, DateTimeKind.Unspecified),
DateTime.SpecifyKind(DEFAULT_DATE, DateTimeKind.Unspecified),
Nothing, New String() {"05002", "00000"}, Nothing, Nothing,
Nothing, New String() {"1"}, Nothing, Nothing, Nothing,
Nothing, Nothing, Nothing, False, False})

```

61. Function: CheckCabinAvailable

This function will check the cabin available for the specify booking date.

psFunction="CheckCabinAvailable", below is the list of psParam or poParam

Parameter	Type	Description	Required
psCabin	String	Cabin Number	✓
pdEmbDate	Date	Embarkation Date	✓
pdDisDate	Date	Disembarkation Date	✓
pnAccID	Array of Integer	Array of Unique Account ID	✓

Return Value

CResponseXml.bSuccess = False when Cabin is not available, the reason will be return as error message

CResponseXml.bSuccess = True when Cabin is available

for example,

```
oResponse = goWS.FidelioSPMSWSXML("CheckCabinAvailable", "",  
New Object() {"05002", DateTime.SpecifyKind(#1/1/2011#,  
DateTimeKind.Unspecified),  
DateTime.SpecifyKind(#2/1/2011#, DateTimeKind.Unspecified), 12334})
```

62. Function: Login

This function will login the user into the system and return a session id. You need to use this session id to subsequence function call.

psFunction="Login", below is the list of psParam or poParam

Parameter	Type	Description	Required
psLoginName	String	User Login Name	✓
psPassword	String	MD5 Hashed Password convert to hex	✓
pnRowsPerPage	Integer	Default 0 = Unlimited, Number of Rows Return per Page	optional

psPassword

As security measure, we do not allow plain text password, you need to use hash the password with MD5 hashing algorithm before passing to the Web Service.

You can use below function to generate the hash value, this sample is in VB .NET

```
Private Function GetMd5Password(ByVal psStr As String) As String
    Dim md5Hasher As New MD5CryptoServiceProvider()
    Dim sBuilder As New StringBuilder()
    Dim nX As Integer

    ' Convert the input string to a byte array and compute the hash.
    Dim byData As Byte() =
    md5Hasher.ComputeHash(ASCIIEncoding.Default.GetBytes(psStr))
    ' Create a new StringBuilder to collect the bytes and create a string.

    ' Loop through each byte of the hashed data and format each one as a
    hexadecimal string.
    For nX = 0 To byData.Length - 1
        sBuilder.Append(byData(nX).ToString("x2"))
    Next
    ' Return the hexadecimal string.
    Return sBuilder.ToString().ToUpper
End Function
```

Return Value

CResponseXml.bSuccess = True when Login is successful

CResponseXml.bSuccess = False when Login has failed

When login is successful

CResponseXML.oObj return array of string

Parameter	Type	Description	Required
oObj(0)	String	Session ID, you must use this ID when make subsequence call	✓

Parameter	Type	Description	Required
oObj(1)	String(99000)	User Security Access, a string of "0" and "1"	✓
oObj(2)	Boolean	True = Is Administrator	✓
oObj(3)	String	User Full Name	✓
oObj(4)	Integer	User Crew ID if link	✓
oObj(5)	Boolean	Must change the password before proceeding. If you do not change the password, you will not allow to call any other function.	✓
oObj(6)	Boolean	Allow changing the password	✓

If oObj(5) and oObj(6) both is True mean you should not allow the user to login.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("Login", "", New Object()
{"admin", "23f9d46d769b154c511f80a016784059"})
```

63. Function: Logout

This function will logout the user, the session id will become invalid, you need to call login again to use the system.

psFunction="Logout" do not have any parameter

Return Value

CResponseXml.bSuccess always = True

for example,

```
oResponse = goWS.FidelioSPMSWSXML("Logout", "SessionID", Nothing)
```

64. Function: ChangePassword

This function will change the user password.

psFunction="ChangePassword", below is the list of psParam or poParam

Parameter	Type	Description	Required
pbyOldPassword	String	MD5 Hashed Password converted to hex	✓
psNewPassword	String	New Password, due to system limitation we cannot hash this value, so it will be plain text	✓

Return Value

CResponseXml.bSuccess = True when change password is successful

CResponseXml.bSuccess = False when change password has failed

pbyOldPassword

As security measure, we do not allow plain text password, you need to use hash the password with MD5 hashing algorithm before passing to the Web Service.

You can use below function to generate the hash value, this sample is in VB .NET

```
Private Function GetMd5Password(ByVal psStr As String) As String
    Dim md5Hasher As New MD5CryptoServiceProvider()
    Dim sBuilder As New StringBuilder()
    Dim nX As Integer

    ' Convert the input string to a byte array and compute the hash.
    Dim byData As Byte() =
    md5Hasher.ComputeHash(ASCIIEncoding.Default.GetBytes(psStr))
    ' Create a new StringBuilder to collect the bytes and create a string.

    ' Loop through each byte of the hashed data and format each one as a
    hexadecimal string.
    For nX = 0 To byData.Length - 1
        sBuilder.Append(byData(nX).ToString("x2"))
    Next
    ' Return the hexadecimal string.
    Return sBuilder.ToString().ToUpper
End Function
```

for example,

```
oResponse = goWS.FidelioSPMSWSXML("ChangePassword", "SessionID",
New Object() { "23f9d46d769b154c511f80a016784059", "1234a" })
```

65. Function: AmenityCompleted

This function will update the amenity status as completed.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="AmenityCompleted", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAmeID	Integer	Amenity Unique ID	✓

Return Value

CResponseXml.bSuccess = False when Update failed.

CResponseXml.bSuccess = True when Update successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("AmenityCompleted", "SessionID",  
New Object() {12334})
```

66. Function: UndoAmenityCompleted

This function will update the amenity status as not completed.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="UndoAmenityCompleted", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAmeID	Integer	Amenity Unique ID	✓

Return Value

CResponseXml.bSuccess = False when Update failed.

CResponseXml.bSuccess = True when Update successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("UndoAmenityCompleted",
"SessionID", New Object() {12334})
```

67. Function: SpecialRequestCompleted

This function will update the special request status as completed.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="SpecialRequestCompleted", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnSrtID	Integer	Special Request Unique ID	✓

Return Value

CResponseXml.bSuccess = False when Update failed.

CResponseXml.bSuccess = True when Update successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("SpecialRequestCompleted",
"SessionID", New Object() {12334})
```

68. Function: UndoSpecialRequestCompleted

This function will update the special status as not completed.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="UndoSpecialRequestCompleted", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnSrtID	Integer	Special Request Unique ID	✓

Return Value

CResponseXml.bSuccess = False when Update failed.

CResponseXml.bSuccess = True when Update successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("UndoSpecialRequestCompleted",
"SessionID", New Object() {12334})
```

69. Function: UpdateCreditCardInfo

This function to update the guest credit card information.

To deactivate all credit card pass in psCardNumber and psCCTrack = Blank String

psFunction="UpdateCreditCardInfo", below is the list of psParam or poParam

Code	Type	Description	Required
pnAccID	Integer	SPMS Internal Account Number	✓
psCardNumber	String	Credit Card Number	✓
psCardExpMMYY	String	Card Expiry Date in MMYY format	✓
psCardName	String	Card Holder Name	✓
psCardCtlNo	String	3 Digits CVV	✓
psCCTrack	String	Credit Card Track data	✓
pbySignature	Byte Array	Byte Array of the signature image, this only apply when PAR->General->Enable Signature Capture for Credit Card is enable	✓
pbyEncTrack1	Byte Array	Papagena Encrypted Track 1	optional
pbyEncTrack2	Byte Array	Papagena Encrypted Track 1	optional
pbyEncTrack3	Byte Array	Papagena Encrypted Track 1	optional
psDeviceSerial	String(32)	Papagena Device Serial Number	optional
psKSN	String(32)	Papagena KSN Number	optional
psToken	String(120)	Papagena Token	optional
pbAssignInvoice1	Boolean	Assign the Credit Card to Invoice 1 (Default = True)	optional
pbAssignInvoice2	Boolean	Assign the Credit Card to Invoice 2 (Default = True)	optional
pbAssignInvoice3	Boolean	Assign the Credit Card to Invoice 3 (Default = True)	optional
pbAssignInvoice4	Boolean	Assign the Credit Card to Invoice 4 (Default = True)	optional
pnParcelado	Enum	0 – Unknow (Pass in this value, the system will check is the card entitle for Parcelado) 1 – No (Default) 2 - Yes	optional

Code	Type	Description	Required
pnDCC	Enum	0 – Unknow (Pass in this value, the system will check if the card entitle for DCC) 1 – No (Default) 2 – Yes	optional
pbAllowRegisterSameCard	Boolean	True = Allow to register credit which already registered to other guest False = Allow to register credit which already registered to other guest depend on PAR	Optional
psCardCurrency	String(3)	3 characters of IOS currency code	optional

The following is a description of the parameters.

Note: For the first card, it always assigns to all invoice regardless of the pbAssignInvoice? Value

If pnParcelado = Unknow and the card entitle for Parcelado, it will return error, if the error end with "?" mean you can ask for user to confirm, the error message will be as below, you can check for the work Parcelado to determine this is the question for Parcelado else the question will be for pnDCC.

If the user answer yes, pass in pnParcelado = 2, if the user answer no, pass in pnParcelado = 1

"This card is eligible for Parcelado Handling - would you like to enroll this card?"

If pnDCC = Unknow and the card entitle for DCC, it will return error end with "?" mean you can ask for user to confirm, if the user answer yes, pass in pnDCC = 2, if the user answer no, pass in pnDCC = 1

pnAccID

You can get this value from the poUxpRes field ux_p_a_id

psCardNumber

This is the credit card number, supply this field only when the credit card had been manually entered.

psCardExpMMYY

This is the credit card expiry date (MMYY), supply this field only when the credit card had been manually entered.

psCardName

This is the credit card holder name, supply this field only when the credit card had been manually entered.

psCardCtlNo

This is the CVV number printed on the back of the credit card. This field is optional.

psCCTrack

This is the credit card track data, supply this field only when the credit card had been swiped.

The field must include the track preamble and postamble.

for example,

```
%B4509190000858834^VISA  
TESTERLEE^20122011427800000000018200000?;4509190000858834=20122011427818200000?
```

pbySignature

Byte Array of the signature image, this only apply when PAR->General->Enable Signature Capture for Credit Card is enabled, you only pass in when the signature capture device is available.

Return Value

CResponseXml.bSuccess = True when update is successful

CResponseXml.bSuccess = False when update has failed

for example,

```
oResponse = goWS.FidelioSPMSWSXML("UpdateCreditCardInfo",  
"SESSIONID", New Object() { 1234, <CardNumber>, <ExpiryDate>,  
<CardName>, <Card CVV>, <Card All Track>, <Signature Byte Array>})
```

71. Function: MarkAssignmentStatus

This function is to update all housekeeping assignment task status for a particular cabin or location for a selected date and port.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="MarkAssignmentStatus", below is the list of psParam or poParam

Code	Type	Description	Required
pnHASstatus	Integer	Housekeeping Assignment Task Status (0-Pending, 1-Started, 2-Completed)	✓
pbIsCabin	Boolean	True – Cabin, False – Public Location	✓
psLocation	String	Cabin Number or Public Location Code	✓
pdAssignedDate	Date	Date of the Housekeeping Assignment Task	✓
pnPortID	Integer	Port ID. Linked to SCD.SCD_ID. A task that was created and linked to this port.	✓
psHASComment	String	Assignment Comment	✓

Return Value

CResponseXml.bSuccess = True when Update is successful

CResponseXml.bSuccess = False when Update has failed

for example,

```
oResponse = goWS.FidelioSPMSWSXML ("MarkAssignmentStatus",
"SessionID", New Object() {2,True,1024,<AssignedDate>,123,
"Comment" })
```

72. Function: MarkSingleAssignmentStatus

This function is to update a single housekeeping assignment task status for a particular housekeeping assignment record.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="MarkSingleAssignmentStatus", below is the list of psParam or poParam

Code	Type	Description	Required
pnHASID	Integer	Housekeeping Assignment Record ID	✓
pnHASstatus	Integer	Housekeeping Assignment Task Status (0-Pending, 1-Started, 2-Completed)	✓
psHASComment	String	Assignment Comment. If there are no comment updates, pass in an empty string	✓
pnACCid	Integer	Crew Account ID, the crew who has been assigned to this task. If there are no updates to this field, pass in 0	✓

Return Value

CResponseXml.bSuccess = True when Update is successful

CResponseXml.bSuccess = False when Update has failed

for example,

```
oResponse = goWS.FidelioSPMSWSXML("MarkAssignmentStatus",
"SessionID", New Object() {12345, 2, "", 0})
```

74. Function: GetAdvanceLoyaltyDiscount

This web method function will get the guest loyalty discount eligibility from SPMS.

Note: Not supported when connecting to offline QCI Sync DB

Code	Type	Description	Required
pnAccID	Integer	Unique Account ID	✓
pnRvc	Integer	Micros Revenue Center Number	✓

CResponseXml.bSuccess = False when GetAdvanceLoyaltyDiscount failed

CResponseXml.bSuccess = True when GetAdvanceLoyaltyDiscount is successful and return Class CAdvanceLoyaltyDiscount

CAdvanceLoyaltyDiscount Class

Code	Type	Description	Required
gnDiscNo	Integer	Micros Discount Number	✓
gnDiscLimit	Decimal	Maximum Discount Allow Per Check	✓
goEligibility	Array of CDiscRate	Discount eligibility	✓

CAdvanceLoyaltyDiscount Class

Code	Type	Description	Required
gsType	String	M-Menu Item,G-Major Group,F-Family Group	✓
gnNumber	Integer	Object Number	✓
gnRate	Decimal	Discount Percentage	✓

for example,

```
oResponse = goWS.FidelioSPMSWSXML("GetAdvanceLoyaltyDiscount",
"SessionID", New Object() {12345, 2})
```

78. Function: UpdateCabState

This web method function will update the cabin status, reason for cabin blocking and blocking period.

Note: Not supported when connecting to offline QCI Sync DB

Code	Type	Description	Required
psCabId	String	Unique Cabin ID	✓
psCabStat	String	Cabin Status (OO, OV, BL, AV)	✓
psComment	String	Cabin Blocking Reason	
pdBlockFromDate	Date	Cabin Block From Date	
pdBlockToDate	Date	Cabin Block To Date	

CResponseXml.bSuccess always return True, always show the CResponse.sErrMsg.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("UpdateCabState", "SessionID",  
New Object() {12345,'OO',<Comment>,<BlockFromDate>,<BlockToDate>})
```

79. Function: SearchCabin

This web method function will do an advanced search on cabins in SPMS. If the date is passed in, then only the list of crash cabins found for that date will be returned.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="SearchCabin", below is the list of poParam

Please take note all the parameter is optional, the more parameters passed the least records it will return.

For Array field, pass in empty array or Nothing to skip this checking

For Date field pass in 30-Dec-1899 if not require

For JSON the array of string will be a string separated by "", each string must start with Open Double Quote and end with Open Double Quite.

for example,

"A,"""","B," = 2 Element

Element 1 = A,

Element 2 = B,

Code	Type	Description	Required
psCabin	Array of String	Unique Cabin IDs	✓
psCabinHKStatus	Array of String	Cabin Housekeeping Status (OD, OC, VD, VC)	✓
psCabinAvlStatus	Array of String	Cabin Availability (OO, OV, BL, AV)	✓
psHKSection	Array of String	Housekeeping section codes	✓
psDeck	Array of String	Cabin Deck (TYP_DEK.TYP_ART)	✓
psCabinCategory	Array of String	Cabin Category (TYP_CAT.TYP_ART)	✓
psCabinType	Array of String	'P' for Pax, 'C' for Crew	✓
psCabinVerticalZone	Array of String	Cabin Vertical Zone (TYP_VTZ.TYP_ART)	✓
pdCrashCabinDate	Date	Date to check for crash cabins. It do not require to check for crash cabins please pass in 30-Dec-1899	✓

Code	Type	Description	Required
psCabinSpecialNeeds	Array of String	0-Normal Cabin,1-Cabin with special need feature	✓
psCabinFeatures	Array of String	Features available in the cabin. Linked to TYP_CAF.TYP_ART	✓

for example,

```
oResponse = goWS.FidelioSPMSWSXML("SearchCabin", "Session ID",
New Object() {True, New String() {"5002", "8001"}, New String()
{"OD"}, Nothing, Nothing, Nothing, Nothing, Nothing, Nothing,
DateTime.SpecifyKind(DEFAULT_DATE, DateTimeKind.Unspecified), New
String() {"1"}, New String() {"P", "2B"})
```

Return Value

CResponseXml.bSuccess = False when SearchCabin has failed

CResponseXml.bSuccess = True when SearchCabin is successful, CResponse.oDataset will have 2 DataTable.

ADO.NET DataTable field structure for data table ("CAB"). This lists the cabins and its details.

Code	Type	Description
CAB_ID	String	Unique Cabin ID
CAB_DESIGN	String	'P' for Pax, 'C' for Crew
CAB_STATE	String	Cabin Availability Status (OO=Out of Order, OS=Out of Service, BL=Blocked, AV=Available)
CAB_BEDS	Number	No of beds/berths in the cabin
CAB_BEDS_SETUP	String	Beds setup for each cabin. Format saved A,B,C,D,E or 1,2,3,4,5
CAB_TEL	String	Cabin Telephone Number
CAB_TEL2	String	Cabin Telephone Number 2
CAB_BEG_BLOCK_D	Date	The cabin is pending repairs, this field stores the date for when this cabin is blocked from. This is the 'Block From' field in FC Admin Cabin setup.
CAB_REPAIR_D	Date	The cabin is pending repairs, this field stores the date for when this cabin is blocked until. This is the 'Block Until' field in FC Admin Cabin setup.

Code	Type	Description
CAB_REPAIR_T	String	The cabin is pending repairs, this field stores the unavailability reason when CAB_STATE=OO or OS or BL. This is the 'Unavailability Reason' field in FC Admin Cabin setup.
CAB_LIFEBOAT	String	Lifeboat this cabin is assigned to. TYP_BOT.TYP_ART
CAB_LIFEBOAT_NAME	String	Lifeboat this cabin is assigned to. TYP_BOT.TYP_COMMENT
CAB_STATION	String	Muster Station this cabin is assigned to. Linked to MST.MST_ID
CAB_STATION_NAME	String	Muster Station this cabin is assigned to. Linked to MST.MST_NAME
CAB_LOCATION	Integer	Null-Undefine,1-Forward,2-Mid Ship,3-Aft
CAB_STARBOARD	Integer	0-Portside,1-Starboard
CAB_CAT	String	Cabin Type. Linked to TYP_CAT.TYP_ART
CAB_CAT_NAME	String	Cabin Type Description. Linked to TYP_CAT.TYP_COMMENT
CAB_DECK	String	Cabin Deck. Linked to TYP_DEK.TYP_ART
CAB_DECK_NAME	String	Cabin Deck Description. Linked to TYP_DEK.TYP_COMMENT
CAB_HKSTATUS	String	Cabin Housekeeping status (OD, VD, OC, VC). Linked to TYP_CCS.TYP_ART
CAB_HKSTATUS_NAME	String	Cabin Housekeeping status description. Linked to TYP_CCS.TYP_COMMENT
CAB_VZONE	String	Cabin vertical zone. Linked to TYP_VTZ.TYP_ART
CAB_VZONE_NAME	String	Cabin vertical zone description. Linked to TYP_VTZ.TYP_COMMENT
CAB_CRW_POSITION	String	Assign default crew position to a cabin
CAB_KEEPER	Integer	Unique Crew ID. Housekeeper assigned to this cabin for gratuity distribution. Linked to RES.RES_ACC. This is the 'Keeper' field in the FC Admin Cabin setup.
CAB_KEEPER_NAME	String	Keeper's Crew Name
CAB_A_KEEPER	Integer	Unique Crew ID. The assistant housekeeper that is assigned to this cabin for gratuity distribution. Linked to RES.RES_ACC. This is the 'Assistant Keeper' field in the FC Admin Cabin setup.

Code	Type	Description
CAB_A_KEEPER_NAME	String	Assistant Keeper's Crew Name
CAB_H_WAITER	Integer	Unique Crew ID. Head Waiter that is assigned to this cabin for gratuity distribution. Linked to RES.RES_ACC. This is the Head Waiter' field in the FC Admin Cabin setup.
CAB_H_WAITER_NAME	String	Head Waiter's Crew Name
CAB_A_WAITER	Integer	Unique Crew ID. The assistant waiter that is assigned to this cabin for gratuity distribution. Linked to RES.RES_ACC. This is the 'Assistant Waiter' field in the FC Admin Cabin setup.
CAB_A_WAITER_NAME	String	Assistant Waiter's Crew Name
CAB_G_WAITER	Integer	Unique Crew ID. The waiter that is assigned to this cabin for gratuity distribution. Linked to RES.RES_ACC. This is the Waiter' field in the FC Admin Cabin setup.
CAB_G_WAITER_NAME	String	Waiter's Crew Name
HKSECTION_NAME	Integer	Housekeeping Section Name. Linked to HSC.HSC_NAME
HKSECTION_COMMENT	String	Housekeeping Section Comment. Linked to HSC.HSC_COMMENT
HSC_CRW	String	Housekeeping Crew Id. List of Housekeeping crew id that can be assigned housekeeping tasks
CAB_SPECIALNEED	Integer	0-Normal Cabin,1-Cabin with special need feature
CAB_FEATURE	String	Features available in the cabin. Linked to TYP_CAF.TYP_ART

ADO.NET DataTable field structure for data table ('FEATURES'). This lists all the cabin features available for the requested cabins

Code	Type	Description
CAB_ID	String	Cabin ID
TYP_ART	String	Cabin feature code
TYP_COMMENT	String	Cabin feature description

80. Function: SearchCrashCabin

This web method function will search for ‘crash cabins’ in SPMS. Crash Cabin is defined as guests who checks in and checks out into the same cabin on the same day and port.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="SearchCrashCabin", below is the list of poParam

For Date field pass in 30-Dec-1899 if not require

Code	Type	Description	Required
pdDateSelected	Date	Date of check-in/check-out for searching crash cabins. If 30-Dec-1899 is passed in then it will search based on SPMS system date	✓
psPortID	String	Port ID. Linked to SCD.SCD_PORT_ID. If an empty string is passed in then it will search for all ports for pdDateSelected	✓

for example,

```
oResponse = goWS.FidelioSPMSWSXML("SearchCrashCabin", "Session ID", New Object() { DateTime.SpecifyKind(DEFAULT_DATE, DateTimeKind.Unspecified), 0 })
```

Return Value

CResponseXml.bSuccess = False when SearchCrashCabin has failed

CResponseXml.bSuccess = True when SearchCrashCabin is successful,

CResponse.oDataset will have 1 DataTable.

ADO.NET DataTable field structure for data table.

Code	Type	Description
CABIN	String	Unique Cabin ID
SCD_PORT_ID	String	Port Name

81. Function: SearchHouseKeeping

This web method function is an advanced search for housekeeping cabins and its tasks.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="SearchHousekeeping", below is the list of poParam

Please take note some parameter is optional, however, the more parameters passed in, the least records it will return.

For Date field pass in 30-Dec-1899 if not require

For Array field, pass in empty array or Nothing to skip this checking

For JSON the array of string will be a string separated by “,”, each string must start with Open Double Quote and end with Open Double Quite.

for example,

“A,”,”B,” = 2 Element

Element 1 = A,

Element 2 = B,

Code	Type	Description	Required
pbIsCabin	Boolean	True – Cabin, False - Location	✓
pdTaskDateFrom	Date	Date From - task that has been created for the cabin/location	✓
pdTaskDateTo	Date	Date To - task that has been created for the cabin/location	✓
psPort	Array of String	Port ID (SCD.SCD_ID) - for Housekeeping Tasks only	✓
psCabin	Array of String	Unique Cabin IDs (CAB.CAB_ID)	✓
psTaskStatus	Array of String	0 – Pending, 1 – Started, 2 - Completed	✓
psCabinHKStatus	Array of String	Cabin Housekeeping Status (OD, OC, VD, VC)	✓
psCabinAvlStatus	Array of String	Cabin Availability (OO, OV, BL, AV)	✓
psHKSection	Array of String	Housekeeping section codes	✓
psCrewID	Array of String	Crew Account IDs (RES.RES_ACC)	✓

Code	Type	Description	Required
psTaskID	Array of String	Task IDs (CTK.CTK_ID)	✓
psDeck	Array of String	Cabin Deck (TYP_DEK.TYP_ART)	✓
psCabinCategory	Array of String	Cabin Category (TYP_CAT.TYP_ART)	✓
psCabinType	Array of String	'P' for Pax, 'C' for Crew	✓
psCabinVerticalZone	Array of String	Cabin Vertical Zone (TYP_VTZ.TYP_ART)	✓
psLinenChange	String	1 – Task requires linen change 0 – Task does not require linen change If nothing is passed in, then it will skip this criteria	
pnAMESRTstatus	Integer	0 – Not Delivered 1 – Delivered 2 – Both Delivered and Not Delivered 3 – Do not return any Amenities or Special Requests	✓
pnAMESRTportID	Integer	Embarkation Port ID (SCD.SCD_ID) - for Amenities and Special Requests only. This is only for expected guests embarking on this port only.	✓
pdAMESRTembarkdate	Date	Embarkation Date – for Amenities and Special Requests Only. This is only for expected guests embarking on this date only.	✓
psAMESRTdeps	Array of String	Amenity/Special Requests Delivery Department	✓
pdAMESRTdeliverydate	Date	Amenity/Special Requests Delivery Date.	✓
pdChangeModDate	Date	Last Changed Date from the last refresh from iCrew	✓
pbSortByCabinsOnly	Boolean	TRUE – CABINS and TASKS output table to be sorted by cabin number FALSE – CABINS and TASKS output table to be sorted by port arrival time and cabin number	✓

Code	Type	Description	Required
pbShowAllInCompleterTasks	Boolean	TRUE - show all incomplete tasks regardless of created date FALSE - show incomplete tasks within date range based on parameters pdTaskDateFrom and pdTaskDateTo	✓
pbShowAllCompleteTasksToday	Boolean	TRUE - show all completed tasks today FALSE - show all completed tasks within date range based on parameters pdTaskDateFrom and pdTaskDateTo	✓
pbUseOldSorting	Boolean	TRUE - use the current method of sorting in .846 (ignores parameters pbShowAllInCompleteTasks and pbShowAllCompletedTasksToday). This is for backward compatibility FALSE - use the new method of sorting (uses parameters pbShowAllInCompleteTasks and pbShowAllCompletedTasksToday, ignores psTaskStatus)	✓

for example,

```

oResponse = goWS.FidelioSPMSWSXML("SearchHouseKeeping",
"Session ID", New Object() {True,
DateTime.SpecifyKind(DEFAULT_DATE, DateTimeKind.Unspecified),
Nothing, Nothing, Nothing, Nothing, Nothing, Nothing, Nothing,
Nothing, Nothing, Nothing, Nothing, Nothing, 1, 0, 12345,
DateTime.SpecifyKind(DEFAULT_DATE, DateTimeKind.Unspecified),
Nothing, DateTime.SpecifyKind(DEFAULT_DATE,
DateTimeKind.Unspecified), DateTime.SpecifyKind(DEFAULT_DATE,
DateTimeKind.Unspecified) })

```

Return Value

CResponseXml.bSuccess = False when SearchHousekeeping has failed
CResponseXml.bSuccess = True when SearchHousekeeping is successful,
CResponse.oDataset will have 11 DataTables for cabins/locations

ADO.NET DataTable field structure for data table (“SERVERDATETIME”), current server datetime.

Code	Type	Description
CURRENTDATETIME	Date	Server Date Time

ADO.NET DataTable field structure for data table (“STATS”), Overall HousekeepingTask Statistics and pending amenities/special requests for Cabins based on parameters passed in.

Code	Type	Description
HK_PENDING_COUNT	Integer	Number of pending housekeeping tasks
HK_STARTED_COUNT	Integer	Number of housekeeping tasks that has started
HK_COMPLETED_COUNT	Integer	Number of completed housekeeping tasks
AME_PENDING_COUNT	Integer	Number of amenities count based on pnAMESRTstatus passed in
SRT_PENDING_COUNT	Integer	Number of special requests count based on pnAMESRTstatus passed in

ADO.NET DataTable field structure for data table (“CABINS”)

- Cabin Details (returns a list of cabins with or without housekeeping tasks AND pending amenities/special requests) sorted by SCD_ARRIVE_TIME, CAB

Code	Type	Description
CAB	String	Unique Cabin ID/Location ID
SCD_ARRIVE_TIME	Date	Port Arrival Time (linked to HAS_PORT_ID)
CAB_NAME	String	Cabin/Location Name
CAB_DESIGN	String	‘P’ for Pax, ‘C’ for Crew. Does not apply to location
CAB_STATE	String	Cabin Availability Status (OO=Out of Order, OS=Out of Service, BL=Blocked, AV=Available). Does not apply to location
CAB_BEDS	Number	No of beds/berths in the cabin
CAB_BEDS_SETUP	String	Beds setup for each cabin. Format saved A,B,C,D,E or 1,2,3,4,5
CAB_TEL	String	Cabin Telephone Number
CAB_TEL2	String	Cabin Telephone Number 2
CAB_BEG_BLOCK_D	Date	Cabin is pending repairs, this field stores the date for when this cabin is blocked from. This is the ‘Block From’ field in FC Admin Cabin setup.

Code	Type	Description
CAB_REPAIR_D	Date	Cabin is pending repairs, this field stores the date for when this cabin is blocked until. This is the 'Block Until' field in FC Admin Cabin setup.
CAB_REPAIR_T	String	Cabin is pending repairs, this field stores the unavailability reason when CAB_STATE=OO or OS or BL. This is the 'Unavailability Reason' field in FC Admin Cabin setup.
CAB_LIFEBOAT	String	Lifeboat this cabin is assigned to. TYP_BOT.TYP_ART
CAB_LIFEBOAT_NAME	String	Lifeboat this cabin is assigned to. TYP_BOT.TYP_COMMENT
CAB_STATION	String	Muster Station this cabin is assigned to. Linked to MST.MST_ID
CAB_STATION_NAME	String	Muster Station this cabin is assigned to. Linked to MST.MST_NAME
CAB_LOCATION	Integer	Null-Undefine,1-Forward,2-Mid Ship,3-Aft
CAB_STARBOARD	Integer	0-Portside,1-Starboard
CAB_CAT	String	Cabin Type. Linked to TYP_CAT.TYP_ART. Does not apply to location
CAB_CAT_NAME	String	Cabin Type Description. Linked to TYP_CAT.TYP_COMMENT. Does not apply to location
CAB_DECK	String	Cabin Deck. Linked to TYP_DEK.TYP_ART. Does not apply to location
CAB_DECK_NAME	String	Cabin Deck Description. Linked to TYP_DEK.TYP_COMMENT. Does not apply to location
CAB_HKSTATUS	String	Cabin Housekeeping status (OD, VD, OC, VC). Linked to TYP_CCS.TYP_ART. Does not apply to location
CAB_HKSTATUS_NAME	String	Cabin Housekeeping status description. Linked to TYP_CCS.TYP_COMMENT. Does not apply to location
CAB_VZONE	String	Cabin vertical zone. Linked to TYP_VTZ.TYP_ART. Does not apply to location
CAB_VZONE_NAME	String	Cabin vertical zone description. Linked to TYP_VTZ.TYP_COMMENT. Does not apply to location
HKSECTION_ID	Integer	Housekeeping Section ID (HSC_ID)

Code	Type	Description
HKSECTION_NAME	String	Housekeeping Section Name (HSC_NAME)

ADO.NET DataTable field structure for data table (“CRASH_CABINS”)

- Crash Cabins

Code	Type	Description
CAB	String	Cabin
PORNAME	String	Port Name
PORTID	Integer	Port ID (SCD_ID)
PORTDATE	Date	Port Date (SCD_DATE)

ADO.NET DataTable field structure for data table (“TASKS”) sort by
SCD_ARRIVAL_TIME field

- Cabin Task Assignments

Code	Type	Description
CTK_ID	Integer	Task ID (CTK.CTK_ID)
CTK_NAME	String	Task Name (CTK.CTK_NAME)
CTK_DESCRIPTIONS	String	Task Description
CTK_DURATION	Integer	Duration of Task
CTK_LINENRULE	Integer	1 – requires linen change, 0 – does not require linen change
HAS_ID	Integer	Unique Housekeeping Task ID
CAB	String	Unique Cabin/Location ID
HAS_STATUS	Integer	0 – Pending, 1 – Started, 2 - Completed
HAS_ASSIGNDATE	Date	Task Created date
HAS_COMMENT	String	Task Comments
HAS_PORT_ID	Integer	Port ID. Linked to SCD.SCD_ID
SCD_PORT_ID	Integer	Port Name
HAS_MODDATE	Date	Last modified date for the task
HAS_COMPLETEDDATE	Date	Task Completed Date
CRW_ID	Integer	Unique Crew ID
CRW_NAME	String	Crew that has been assigned the task to
SCD_ARRIVE_TIME	Date	Port Arrival Time

ADO.NET DataTable field structure for data table (“STATS_CABINS”), Housekeeping
Task Statistics per Cabin based on parameters passed in.

Code	Type	Description
CAB	String	Unique Cabin ID/Location
HK_PENDING_COUNT	Integer	Number of pending tasks per cabin/location
HK_STARTED_COUNT	Integer	Number of tasks that has started per cabin/location
HK_COMPLETED_COUNT	Integer	Number of completed tasks per cabin/location

ADO.NET DataTable field structure for data table (“STATS_AME”), Pending Amenities per Cabin.

Code	Type	Description
CAB	String	Unique Cabin ID/Location
AME_PENDING_COUNT	Integer	Number of pending amenities per cabin/location

ADO.NET DataTable field structure for data table (“STATS_SRT”), Pending Special Requests per Cabin.

Code	Type	Description
CAB	String	Unique Cabin ID/Location
SRT_PENDING_COUNT	Integer	Number of pending special requests per cabin/location

ADO.NET DataTable field structure for data table (“EMB_PORTS”), Reservation Embark/Disembark Ports per Cabin

Code	Type	Description
CAB	String	Unique Cabin ID/Location
EMBARKPORT	String	Embarkation port for the checked-in guest for this cabin
DEBARKPORT	String	Disembarkation port for the checked-in guest for this cabin

ADO.NET DataTable field structure for data table (“RUSH_CABINS”), Rush Cabins

Code	Type	Description
CAB	String	Unique Cabin ID/Location
EMBARKPORT	String	Embarkation port for the reservation that is embarking on pdTaskDate
DEBARKPORT	String	Disembarkation port for the reservation that is disembarking on pdTaskDate

Code	Type	Description
EMBARKSTATUS	String	Embarkation status for the reservation that is embarking on pdTaskDate
EMBARK_ARRIVEDATE	Date	Date and Time of the reservation that is embarking on pdTaskDate

ADO.NET DataTable field structure for data table (“COUT_CABINS”), Cabins with check-out tasks

Code	Type	Description
CAB	String	Unique Cabin ID/Location
HAS_PORT_ID	Integer	Port ID where the cabin has check-out tasks
PORTRNAME	String	Port name where the cabin has check-out tasks
SCD_DATE	Date	Port Arrival Date

82. Function: GetHouseKeepingSections

This web method function will return a list of ALL housekeeping section codes and names based on the criteria below,

psFunction="GetHouseKeepingSections", below is the list of poParam

For Array field, pass in empty array or Nothing to skip this checking

For JSON the array of string will be a string separated by "", each string must start with Open Double Quote and end with Open Double Quite.

for example,

"A,"","","B," = 2 Element

Element 1 = A,

Element 2 = B,

Note: Not supported when connecting to offline QCI Sync DB

Code	Type	Description	Required
psCrewIds	Array of String	List of unique crew Account IDs. If this is not passed in, then all HouseKeeping sections are returned	✓
psCabin	Array of String	List of Cabins	✓
psLocations	Array of String	List of Locations	✓
psDeck	Array of String	List of Deck	✓
psCabinCategory	Array of String	List of Cabin Categories	✓
psCabinType	Array of String	List of Cabin Types	✓
psCabinVerticalZone	Array of String	List of Cabin Vertical Zones	✓

for example,

```
oResponse = goWS.FidelioSPMSWSXML("GetHouseKeepingSections",
"Session ID", New Object() { Nothing , Nothing , Nothing , Nothing ,
, Nothing , Nothing , Nothing })
```

Return Value

CResponseXml.bSuccess = False when SearchHouseKeepingSections has failed

CResponseXml.bSuccess = True when SearchHouseKeepingSections is successful,
CResponse.oDataset will have 1 DataTable.

ADO.NET DataTable field structure for Table 1

Code	Type	Description
HSC_NAME	String	Housekeeping Section Code
HSC_COMMENT	String	Housekeeping Section Name

83. Function: SearchAmenity

Not supported when connecting to offline QCI Sync DB

This web method function is an advanced search for amenity.

psFunction="SearchAmenity", below is the list of poParam

Please take note some parameter is optional, however, the more parameters passed in, the least records it will return.

For Date field pass in 30-Dec-1899 if not require

For Array field, pass in empty array or Nothing to skip this checking

For JSON the array of string will be a string separated by "", each string must start with Open Double Quote and end with Open Double Quote.

for example,

"A,"","","B," = 2 Element

Element 1 = A,

Element 2 = B,

Code	Type	Description	Required
peReservationType	Integer	0- ReserveAndCheckIn , 1- 1 – Reserve , 2- 2- CheckIn 3- 3- CheckOut	
pdExpDeliveryDateFrom	Date	Amenity Delivery Date (AME_DDATE) If nothing is passed in, then it will skip this criteria	
pdExpDeliveryDateTo	Date	Amenity Delivery Date (AME_DDATE) If nothing is passed in, then it will skip this criteria	
pdDeliveredDateFrom	Date	Amenity Service Done Date (AME_DONE_DATE) If nothing is passed in, then it will skip this criteria	
pdDeliveredDateTo	Date	Amenity Service Done Date (AME_DONE_DATE) If nothing is passed in, then it will skip this criteria	
psGuestLastName	String	Guest Last Name (UXP_A_NAME) If nothing is passed in, then it will skip this criteria	

Code	Type	Description	Required
psGroupID	Array of String	Travel Group ID (UXP_A_ID) If nothing is passed in, then it will skip this criteria	
psCabinCategory	Array of String	Cabin Category (TYP_CAT.TYP_ART) If nothing is passed in, then it will skip this criteria	
psDeliveryLocation	Array of String	Amenity Delivery Location (AME_LOCATION) If nothing is passed in, then it will skip this criteria	
psDeck	Array of String	Cabin Deck (TYP_DEK.TYP_ART) If nothing is passed in, then it will skip this criteria	
psDeliveredBy	Array of String	Amenity Delivery By (USR.USR_ID) If nothing is passed in, then it will skip this criteria	
psCabin	Array of String	Unique Cabin IDs (CAB.CAB_ID) If nothing is passed in, then it will skip this criteria	
psAmenityCode	Array of String	Amenity Code (TYP_AMT.TYP_ART) If nothing is passed in, then it will skip this criteria	
psDepartment	Array of String	Amenity Delivery Division (AME_ODI_ID) If nothing is passed in, then it will skip this criteria	
psHKSection	Array of String	Housekeeping Section Name (HSC_NAME) If nothing is passed in, then it will skip this criteria	

for example,

```
oResponse = goWS.FidelioSPMSWSXML("SearchAmenity", New Object()
{<ReservationType>,<ExpDeliveryDateFrom>,<ExpDeliveryDateTo>,<DeliveryDateFrom>,<DeliveryDateTo>,<LastName>,<GroupID>,<CabinCategory>,<DeliveryLocation>,<Deck>,<DeliveryBy>,<CabinID>,<AmeCode>,<Department>,<HKSection>})
```

Return Value

CResponseXml.bSuccess = False when SearchAmenity has failed

CResponseXml.bSuccess = True when SearchAmenity is successful, CResponse.oDataset will have 1 DataTable.

ADO.NET DataTable field structure for data table.

Code	Type	Description
AME_ID	Integer	Amenity ID (Unique ID)
AMECODE	String	Amenity Code. Linked to TYP_AMT.TYP_ART.
AMENAME	String	Port Name. Linked to TYP_AMT.TYP_COMMENT.
ACCID	Integer	Account ID
NAME	String	Guest Name
RESSTATUS	String	Reservation Status
VIPCODE	String	VIP ID. Linked to TYP_VIP.TYP_ART.
VIPNAME	String	VIP Name. Linked to TYP_VIP.TYP_COMMENT.
PORTRID	String	Embarkation Port ID
PORTNAME	String	Embarkation Port Name. Linked to TYP_HRB.TYP_COMMENT.
GROUPID	Integer	Travel Group Reference ID
GROUPNAME	String	Travel Group Name
CABINID	String	Unique Cabin ID
HSC_NAME	String	Housekeeping Section Code
HSC_COMMENT	String	Housekeeping Section Name
AME_LOCATION	String	Amenity Delivery Location
AME_ODI_ID	String	Amenity Delivery Division ID. Linked to TYP_ODI.TYP_ART.
TYP_COMMENT	String	Amenity Delivery Division Name. Linked to TYP_ODI.TYP_COMMENT.
CAB_VZONE	String	Cabin vertical zone. Linked to TYP_VTZ.TYP_ART.
CAB_VZONE_NAME	String	Cabin vertical zone description. Linked to TYP_VTZ.TYP_COMMENT.
CAB_TYPE	String	Cabin Type ID. Linked to TYP_CAT.TYP_ART.
TYP_COMMENT1	String	Cabin Type Name. Linked to TYP_CAT.TYP_COMMENT.
CAB_DECK	String	Cabin Deck ID. Linked to TYP_DEK.TYP_ART.

Code	Type	Description
TYP_COMMENT2	String	Cabin Deck Name. Linked to TYP_DEK.TYP_COMMENT.
AME_DDATE	Date	Amenity Delivery Date
AME_DONE_DATE	Date	Amenity Service Done Date
AME_DONE_USERID	Integer	Amenity Service done by waiter. Linked to USR.USR_ID.
USR_LOGIN	String	User Login Name.
CAB_KEEPER	Integer	Housekeeper ID. Linked to RES.RES_ACC.
CAB_KEEPER_NAME	String	Housekeeper Name.
CAB_A_KEEPER	Integer	Assistant Housekeeper ID. Linked to RES.RES_ACC.
CAB_A_KEEPER_NAME	String	Assistant Housekeeper Name.
CAB_G_WAITER	Integer	Waiter ID. Linked to RES.RES_ACC.
CAB_G_WAITER_NAME	String	Waiter Name.
CAB_A_WAITER	Integer	Assistant Waiter. Linked to RES.RES_ACC
CAB_A_WAITER_NAME	String	Assistant Waiter Name
AME_AMOUNT	Double	Amenity Price
AME_COMMENTS	String	Amenity Comments
AME_COST	Integer	Amenity Cost
AME_CREATED_BY	Integer	User Created Amenity Request
AME_CREATED_DATE	Date	Amenity Created Date
AME_CURR_ID	String	Amenity price currency. Linked to TYP_CUR.TYP_ART
AME_EXT_CODE	String	External Brochure Code
AME_EXT_ID	String	External ID
AME_FLG	String	Displayed as flag in the Amenities section in guest billing screen. Not been referenced anywhere else.
AME_MESSAGE	String	Message From Sender
AME_MODDATE	Date	Last Modified Date
AME_NOTE	String	Amenity Description
AME_OCCURRENCE	String	Amenity Deliver Occurrence
AME_QUANTITY	Integer	Amenity Quantity

Code	Type	Description
AME_RESBOOKNR	String	External Reservation Booking Number. Linked to RES.RES_BOOKNR
AME_RESID	Integer	Reservation account ID. Linked to RES.RES_ID
AME_SENDER1	String	Amenity Sender
AME_SENDER2	String	Amenity Sender 2 (Not been referenced)
AME_V_GUESTID	Integer	Reservation System account ID. Linked to RES.RES_V_GUESTID
AME_VID	String	Unique ID

84. Function: SearchSpecialRequest

This web method function is an advanced search for special request.

psFunction="SearchSpecialRequest", below is the list of poParam

Please take note some parameter is optional, however, the more parameters passed in, the least records it will return.

For Date field pass in 30-Dec-1899 if not require

For Array field, pass in empty array or Nothing to skip this checking

For JSON the array of string will be a string separated by "", each string must start with Open Double Quote and end with Open Double Quote.

for example,

"A,""",""B," = 2 Element

Element 1 = A,

Element 2 = B,

Code	Type	Description	Required
peReservationType	Integer	0- ReserveAndCheckIn , 1- 1 – Reserve , 2- 2- CheckIn 3- 3- CheckOut	
pdExpDeliveryDateFrom	Date	Special Request Delivery Date (SRT_DDATE) If nothing is passed in, then it will skip this criteria.	
pdExpDeliveryDateTo	Date	Special Request Delivery Date (SRT_DDATE) If nothing is passed in, then it will skip this criteria.	
pdDeliveredDateFrom	Date	Special Request Delivery Date (SRT_DONE_DATE) If nothing is passed in, then it will skip this criteria.	
pdDeliveredDateTo	Date	Special Request Delivery Date (SRT_DONE_DATE) If nothing is passed in, then it will skip this criteria.	
psGuestLastName	String	Guest Last Name (UXP_A_NAME) If nothing is passed in, then it will skip this criteria.	

Code	Type	Description	Required
psCode	Array of String	Special Request Code (TYP_SRT.TYP_ART) If nothing is passed in, then it will skip this criteria.	
psExtCode	Array of String	Special Request Identifier Code.	
psGroupID	Array of String	Travel Group ID (UXP_A_ID) If nothing is passed in, then it will skip this criteria	
psCabinCategory	Array of String	Cabin Category (TYP_CAT.TYP_ART) If nothing is passed in, then it will skip this criteria	
psDeliveryLocation	Array of String	Delivery Location (SRT_LOCATION) If nothing is passed in, then it will skip this criteria	
psDeck	Array of String	Cabin Deck (TYP_DEK.TYP_ART) If nothing is passed in, then it will skip this criteria	
psDeliveryBy	Array of String	Special Request Delivery By. Linked to USR.USR_ID. If nothing is passed in, then it will skip this criteria	
psCabin	Array of String	Unique Cabin IDs (CAB.CAB_ID) If nothing is passed in, then it will skip this criteria	
psDepartment	Array of String	Amenity Delivery Division (SRT_ODI_ID) If nothing is passed in, then it will skip this criteria	
psHKSection	Array of String	Housekeeping Section Name (HSC_NAME) If nothing is passed in, then it will skip this criteria	

for example,

```
oResponse = goWS.FidelioSPMSWSXML("SearchSpecialRequest", New
Object()
{ <ReservationType>, <ExpDeliveryDateFrom>, <ExpDeliveryDateTo>, <DeliveryDateFrom>, <DeliveryDateTo>, <LastName>, <SRTCode>, <ExternalCode>,
<GroupID>, <CabinCategory>, <DeliveryLocation>, <Deck>, <DeliveryBy>, <Department>, <HKSection> })
```

Return Value

CResponseXml.bSuccess = False when SearchSpecialRequest has failed
 CResponseXml.bSuccess = True when SearchSpecialRequest is successful,
 CResponse.oDataset will have 1 DataTable.

ADO.NET DataTable field structure for data table.

Code	Type	Description
SRT_ID	Integer	Special Request ID (Unique ID)
SRTCODE	String	Special Request Code. Linked to TYP_SRT.TYP_ART.
SRTNAME	String	Port Name. Linked to TYP_SRT.TYP_COMMENT.
SRT_EXT_CODE	String	Special Request Identifier Code.
ACCID	String	Account ID
Name	String	Guest Name
RESSTATUS	String	Reservation Status
VIPCODE	String	VIP ID. Linked to TYP_VIP.TYP_ART.
VIPNAME	String	VIP Name. Linked to TYP_VIP.TYP_COMMENT.
PORTRID	String	Embarkation Port ID
PORTRNAME	Integer	Embarkation Port Name. Linked to TYP_HRB.TYP_COMMENT.
GROUPID	String	Travel Group Reference ID
GROUPNAME	String	Travel Group Name
CABINID	String	Unique Cabin ID
HSC_NAME	String	Housekeeping Section Code
HSC_COMMENT	String	Housekeeping Section Name
SRT_LOCATION	String	Delivery Location.
SRT_ODI_ID	String	Amenity Delivery Division ID. Linked to TYP_ODI.TYP_ART.
TYP_COMMENT	String	Amenity Delivery Division Name. Linked to TYP_ODI.TYP_COMMENT.
CAB_VZONE	String	Cabin vertical zone. Linked to TYP_VTZ.TYP_ART.
CAB_VZONE_NAME	String	Cabin vertical zone description. Linked to TYP_VTZ.TYP_COMMENT.
CAB_TYPE	String	Cabin Type ID. Linked to TYP_CAT.TYP_ART.
TYP_COMMENT1	string	Cabin Type Name. Linked to TYP_CAT.TYP_COMMENT.

Code	Type	Description
CAB_DECK	String	Cabin Deck ID. Linked to TYP_DEK.TYP_ART.
TYP_COMMENT2	String	Cabin Deck Name. Linked to TYP_DEK.TYP_COMMENT.
SRT_DDATE	Date	Special Request Delivery Date
SRT_DONE_DATE	Date	Special Request Service Done Date
SRT_DONE_BY	Integer	Special Request done by the waiter. Linked to USR.USR_ID.
USR_LOGIN	String	User Login Name.
CAB_KEEPER	Integer	Housekeeper ID. Linked to RES.RES_ACC.
CAB_KEEPER_NAME	String	Housekeeper Name.
CAB_A_KEEPER	Integer	Assistant Housekeeper ID. Linked to RES.RES_ACC.
CAB_A_KEEPER_NAME	String	Assistant Housekeeper Name.
CAB_G_WAITER	Integer	Waiter ID. Linked to RES.RES_ACC.
CAB_G_WAITER_NAME	String	Waiter Name
CAB_A_WAITER	Integer	Assistant Waiter. Linked to RES.RES_ACC.
CAB_A_WAITER_NAME	String	Assistant Waiter Name
SRT_CREATED_BY	Number	The user that created this special request.
SRT_DATE_CREATED	Date	Special request actual creation date
SRT_DESCR	String	Special Request Description
SRT_EVENTDATE	Date	Event Date & Time
SRT_EXT_ID	Number	Interfaced System Special Request ID
SRT_MODDATE	Date	Last Modification Date
SRT_QUANTITY	Number	Special Request Quantity
SRT_RESID	Integer	Guest Account ID. Linked to RES.RES_ID
SRT_VID	String	Unique ID (for import duplicate functionality)

85. Function: RetrievePage

This function search for a guest with various criteria from the SPMS system

psFunction="GuestSearch", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnPage	Integer	Page Number	✓
psFunction	String	Last call function	✓
psWSFunction	String	Need to pass in when psFunction = 'WSFunction'	optional

Return Value

CResponseXml.bSuccess = False when RetrievePage has failed

CResponseXml.bSuccess = True when RetrievePage is successful,

Other value depend on the psFunction and psWSFunction, refer to the psFunction for details.

86. Function: MessageSend

This web method function will add new messages created externally into SPMS database.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="MessageSend", below is the list of poParam

For Date field pass in 30-Dec-1899 if not required

Code	Type	Description	Required
pnMsgID	Integer	Unique Message ID (TAMS_ID). Put 0 for adding new record	✓
pnFromUsrLogin	Long	Unique User ID of the crew that is sending the message. In SPMS, this is the USR.USR_ID value	✓
pnToUsrLogin	Long	Unique User ID of the crew that is receiving the message. In SPMS, this is the USR.USR_ID value	✓
psMsgSubject	String	Message subject	✓
psMsgContent	String	Message content	✓
pnProfileType	Integer	Message Profile Type. 1-Guest, 2-Crew, 3-Ship	✓
pnMsgLevel	Integer	Message Level. 1-Normal, 2-High	✓
pnMsgStatus	Integer	Message Status. 1-Sent, 2-Read, 3-Deleted	✓
pdMsgCreated	Date	Message created date & time	✓
psMsgModule	String	Messaging for which module (TA=TimeAttendance, HK=HouseKeeping, OTHER=for others)	✓

for example,

```
oResponse = goWS.FidelioSPMSWSXML("MessageSend", "Session ID",
New Object() {123, 345, <Subject>, <MessageContent>, 2, 1, 2,
DateTime.SpecifyKind(DEFAULT_DATE, DateTimeKind.Unspecified)
,'OTHER' })
```

Return Value

CResponseXml.bSuccess = False when MessageSend has failed

CResponseXml.bSuccess = True when MessageSend is successful

CResponsesXml.oObj = TAMS_ID when bSuccess = True

87. Function: MessageRead

This web method function will return a list of messages from SPMS database.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="MessageRead", below is the list of poParam

For Date field pass in 30-Dec-1899 if not required

Code	Type	Description	Required
psMsgDirection	String	S - All sent messages from the user that logged in R - All received messages for the user that logged in	✓
pdMsgDateFrom	Date	Retrieve Messages from this date. Pass in DEFAULT_DATE if this is not required	✓
pdMsgDateTo	Date	Retrieve Messages until this date. Pass in DEFAULT_DATE if this is not required	✓
pnMsgProfileType	Integer	1=message to/from a guest 2=message to/from another crew member (private messages) 3=Official ship messages including broadcasted alert messages	✓
pnMsgDeleted	Integer	Message deleted? (1-deleted, 0-not deleted yet)	✓
psMsgModule	String	Messaging for which module (TA=TimeAttendance, HK=HouseKeeping, OTHER=for others)	✓

for example,

```
oResponse = goWS.FidelioSPMSWSXML("MessageRead", "Session ID",
New Object() {'R', DateTime.SpecifyKind(DEFAULT_DATE,
DateTimeKind.Unspecified), DateTime.SpecifyKind(DEFAULT_DATE,
DateTimeKind.Unspecified), 2, 0, 'OTHER'})
```

Return Value

CResponseXml.bSuccess = False when MessageRead has failed

CResponseXml.bSuccess = True when MessageRead is successful, CResponse.oDataset will have 1 DataTable.

ADO.NET DataTable field structure for data table ordered by field TAMS_MODDATE in descending order

Code	Type	Description
TAMS_ID	Integer	Unique Message ID
TAMS_CRW_ID	Integer	Message for this crew. Unique Crew identifier. Linked to RES.RES_ACC
TAMS_FROM	Integer	Message from this crew. Unique user login identifier. Linked to USR.USR_ID
TAMS SUBJECT	String	Message subject
TAMS_MSG	String	Message Content
TAMS_MSG_CREATED	Date	Message created date
TAMS_READ	String	Message read? (1-read, 0-not read yet)
TAMS_READ_DATE	Date	Message read date
TAMS_DELETED	String	Message deleted? (1-deleted, 0-not deleted yet)
TAMS_MSG_TYPE	Number	0-Individual message, 1-Broadcasted message
TAMS_MODULE	String	Messaging for which component (TA=TimeAttendance, HK=HouseKeeping, CPL=Complaints, CHKIN=Upon Checkin, CABCHG=Cabin Change)
TAMS_PROFILE	Number	Type of Message (1-Passenger, 2-Crew, 3-Ship)
TAMS_LEVEL	Number	Message Level (1-Normal, 2-High)
TAMS_TO_USR_ID	Number	Message for this person. Linked to USR.USR_ID
TAMS_FROM_ACCID	Number	Message from this person. Linked to RES.RES_ACC
TAMS_MODDATE	Date	Last modified date
CRWNAME	String	Crew Member's Name
CRW_ID	Number	Crew ID
OPO_ID	String	Position ID
OPO_POSITION	String	Position Name
DEPTID	String	Department ID
DEPTNAME	String	Department Name
TAMS_EXTERNALID	Number	Linked to external record id. (TAMS_MODULE='CPL',>>CPL_ID), (TAMS_MODULE='CHKIN',>>RES_ACC), (TAMS_MODULE='CABCHG',>>RES_ACC)
XDOC_FILE	Blob	Binary file contained inside the table that stored the document (Compressed)
XDOC_FILENAME	String	Name of the file
XDOC_SIZE	Number	Size of file before compression

88. Function: MessageDelete

This web method function will flag a message as deleted in SPMS database.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="MessageDelete", below is the list of poParam

Code	Type	Description	Required
pnMsgID	Integer	Unique Message ID	✓

for example,

```
oResponse = goWS.FidelioSPMSWSXML("MessageDelete", "Session  
ID", New Object() {123})
```

Return Value

CResponseXml.bSuccess = False when MessageDelete has failed

CResponseXml.bSuccess = True when MessageDelete is successful

89. Function: MessageSetRead

This web method function will flag a message as "Read" SPMS database.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="MessageSetRead", below is the list of poParam

Code	Type	Description	Required
pnMsgID	Integer	Unique Message ID	✓

for example,

```
oResponse = goWS.FidelioSPMSWSXML("MessageSetRead", "Session  
ID", New Object() {123})
```

Return Value

CResponseXml.bSuccess = False when MessageSetRead has failed

CResponseXml.bSuccess = True when MessageSetRead is successful

90. Function: AddHKTTask

This web method function will add new housekeeping task created externally into SPMS database.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="AddHKTTask", below is the list of poParam

Code	Type	Description	Required
pdTaskDate	Date	Housekeeping Task Date	✓
psCabin	String	Cabin Number	✓
psLocation	String	Location	✓
pnStatus	Integer	0-Pending, 1-Started, 2-Completed	✓
pnCrewID	Integer	Task assigned to this Crew ID	✓
pnTaskID	Integer	Housekeeping Task ID	✓
pnPortID	Integer	Port ID	✓
psComment	String	Task Comments	

for example,

```
oResponse = goWS.FidelioSPMSWSXML("AddHKTTask", "Session ID",
New Object() {DateTime.SpecifyKind(DEFAULT_DATE,
DateTimeKind.Unspecified), <Cabin>, <Location>, 0, 123, 2, 123,
<Comments>})
```

Return Value

CResponseXml.bSuccess = False when AddHKTTask has failed

CResponseXml.bSuccess = True when AddHKTTask is successful

91. Function: SearchHKForecast

This web method function will return a list of itinerary port days and list of guests' reservations per cabin.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="SearchHKForecast", below is the list of poParam

Please take note some parameter is optional, however, the more parameters passed in, the least records it will return.

For Date field pass in 30-Dec-1899 if not require

For Array field, pass in empty array or Nothing to skip this checking

For JSON the array of string will be a string separated by "", each string must start with Open Double Quote and end with Open Double Quite.

for example,

"A,"""","B," = 2 Element

Element 1 = A,

Element 2 = B,

Code	Type	Description	Required
pdItineraryFrom	Date	Port Itinerary From Day	✓
pdItineraryTo	Date	Port Itinerary To Day	✓
psCabinHKstatus	Array of String	Cabin Housekeeping Status	✓
psHKSection	Array of String	Housekeeping Section	✓
psDeck	Array of String	Cabin Deck	✓
psCabin	Array of String	Cabins	✓
psCabinAvlStatus	Array of String	Cabin Availability Status	✓
pdCrashCabinDate	Date	Date to search for Crash Cabins	✓

for example,

```
oResponse = goWS.FidelioSPMSWSXML("SearchHKForecast", "Session ID", New Object() {DateTime.SpecifyKind(DEFAULT_DATE, DateTimeKind.Unspecified), DateTime.SpecifyKind(DEFAULT_DATE, DateTimeKind.Unspecified), Nothing, Nothing, Nothing, Nothing, Nothing, DateTime.SpecifyKind(DEFAULT_DATE, DateTimeKind.Unspecified)})
```

Return Value

CResponseXml.bSuccess = False when SearchHKForecast has failed
CResponseXml.bSuccess = True when SearchHKForecast is successful,
CResponse.oDataset will have 4 DataTable.

ADO.NET DataTable 1("ITIN") - Master Table 1 lists all the itinerary port days

Code	Type	Description
SCD_ID	Integer	Unique Port Day ID
SCD_DATE	Date	Port Date
PORNAME	String	Port ID (SCD_PORT_ID)
PORDESCR	String	Port Name
SCD_DESCR	String	Port Description
SCD_ARRIVE_TIME	Date	Port Arrival Time
SCD_DEPART_TIME	Date	Port Departure Time

ADO.NET DataTable 2 ("CABINS") – Master Table 2 lists all cabins

Code	Type	Description
CAB_ID	Integer	Unique Cabin ID
CAB_STATE	String	Cabin State (OO=Out of Order, OS=Out of Service, BL=Blocked, AV=Available)
CAB_CLEAN_STATE	String	Cabin Housekeeping status
CAB_BEG_BLOCK_D	Date	Date of cabin blocked from
CAB_REPAIR_D	Date	Date of cabin blocked until
CAB_REPAIR_T	String	Unavailability Reason

ADO.NET DataTable 3 ("RESERV") – linked to DataTable2 by cabin, lists all reservations grouped by booking number

Code	Type	Description
RES_BOOKNR	String	Reservation Booking Number
TOTALGUEST	Integer	Number of Guests
RES_CAB	String	Cabin
RES_STATUS	String	Reservation status
EMBARKDATE	Date	Embarkation Date (Arrival date & time) for expected guests

Code	Type	Description
DEBARKDATE	Date	Debarkation Date (Arrival date & time) for already onboard guests
EMBARKPORT	String	Embarkation Port for expected guests
DEBARKPORT	String	Debarkation Port for already onboard guests

ADO.NET DataTable 4 (“CRASH_CABINS”) – Master Table 4 lists all crash cabins and their reservations

Code	Type	Description
CAB	String	Cabin
EMBARK_RES_BOOKNR	String	Reservation Booking Number for the embarking guest
EMBARK_STATUS	String	Reservation Status of the embarking guest
EMBARK_PORT	String	Embarkation Port of the embarking guest
DEBARK_RES_BOOKNR	String	Reservation Booking Number for the debarking guest
DEBARK_STATUS	String	Reservation Status of the debarking guest
DEBARK_PORT	String	Debarkation Port of the debarking guest

92. Function: UpdateTravelDocAdvance

This function will update the travel document with selected fields, to add a new record you need to use [UpdateTravelDoc](#).

psFunction="UpdateTravelDocAdvance", below is the list of psParam or poParam

For XML

Code	Type	Description	Required
poVis	String/Datatable	You need to create a WSF to return all fields from VIS view and the data table Only one record is allowed at one time, JSON – string, XML = Datatable. Please contact Oracle Support to obtain the WSF scripts.	✓
pbAssignPhotoToAccount	Boolean	True – Assign the Document Photo to Guest Photo	✓

For Json

Code	Type	Description	Required
poVis	String/Datatable	You need to create a WSF to return all fields from VIS view and the data table Only one record is allowed at one time, JSON – string, XML = Datatable. Please contact Oracle Support to obtain the WSF scripts.	✓
pnVisID	Integer	Unique Travel Document ID	✓
pbAssignPhotoToAccount	Boolean	True – Assign the Document Photo to Guest Photo	✓

The following is a description of the parameters.

poVis

This is the data table returned from the WSF (SELECT * FROM vis WHERE vis_id = <PARAMNUM1>), however, only one record is allowed at any one time. For FidelioSPMSWSXML function, the poVis need to serialize first using the below function

```
Public Function SerializeObject(ByVal poObject As Object) As String
```

```

Dim oWriter As XmlSerializer
Dim oMemory As MemoryStream

oWriter = New XmlSerializer(poObject.GetType)
oMemory = New MemoryStream
oWriter.Serialize(oMemory, poObject)
SerializeObject =
System.Text.UnicodeEncoding.Default.GetString(oMemory.ToArray)
oMemory.Dispose()
oMemory = Nothing
oWriter = Nothing
End Function

```

Parameter	Type	Description	Required
pnVisID	Integer	Unique Travel Document ID	✓
pnAccID	Integer	Unique Account ID	optional
psCountry	String(6)	Country	optional
psNumber	String(20)	Document Number	optional
psVisType	String(6)	Internal Document Type	optional
pdIssueDate	Date	Issue Date	optional
psIssuePlace	Date	Issue Place	optional
pdExpiryDate	Date	Expiry Date	optional
psVid	String(100)	Unique External ID, for Data Import	optional
pdRMUDate	Date	RMU Date	optional
psDocType	String(6)	Document Type	optional
psFirstName	String(40)	First Name	optional
psMiddleName	String(20)	Middle Name	optional
psLastName	String(40)	Last Name	optional
pdBirthDate	Date	Birth Date	optional
psRemoteID	String(30)	Remote ID	optional
psMrz1	String(100)	MRZ 1	optional
psMrz2	String(100)	MRZ 2	optional
psMrz3	String(100)	MRZ 3	optional
psDocName	String(100)	Document Name	optional
psGUID	String(50)	GUID, for CMS	optional
pnEntry	Integer	Number of Allow Entry	optional
pdValidFrom	Date	Valid From	optional

Parameter	Type	Description	Required
pnDurationOfStay	Integer	Duration of Stay	optional
pbyDocImage	Byte Array	Document Image	optional
pbyDocPhoto	Byte Array	Document Photo	optional
pbyMultiPageDocImage	Byte Array	Multipage Scan document image	optional
psFileName	String(100)	Original File Name for file upload	optional

pbAssignPhotoToAccount

True – Assign the Document Photo to Guest Photo

pnVisID

You can get this value from the WSF field vis_id

Return Value

CResponseXml.bSuccess = True when update is successful.

CResponseXml.bSuccess = False when update has failed

for example,

```
oResponse = goWS.FidelioSPMSWSXML("UpdateTravelDocAdvance",
"SESSIONID", New Object() { SerializeObject(oVis), True,
<VIS_ID>} )
```

93. Function: FCUIGuestInquiry

This web method function will query the list of guest from SPMS bases on the input parameter, this function is compatible with the FCUI Inquire message.

Note: Not supported when connecting to offline QCI Sync DB

Parameter	Type	Description	Required
psSearchStr	String	Search String	✓
peSearchType	Integer	Search String type	✓
peAccountStatus	Integer	Account Status	✓
peAccountType	Integer	Account Type	✓
pbIncludePicture	Boolean	Include Guest Picture in Return Result	✓

The following is a description of the parameters.

psSearchStr

Entered by the external system operator (manually or through a magnetic card reader) and generally contains any information necessary to identify the account. The field can be an account number, card number, cabin number or person name.

peSearchType

The field identifies the type of entry in the Account ID field. The following Account ID Entry Types are defined:

- 0 → Card identification number (RES_BOARDCC)
- 1 → Cabin number or System account (RES_CAB/UXP_A_SYS_ACC)
- 2 → Name of a person or company account(UXP_A_NAME_N)
- 3 → Internal identification number (UXP_A_ID)
- 4 → Group Id number (RES_GRP)
- 5 → External identification number (RES_BOOKNR)
- 6 → Phone trunk number (CAB_TEL or CAB_TEL2)
- 7 → e-mail Id (UXP_H_EMAIL or RES_EMAIL_SHIP)
- 8 → Internal Id number(UXP_C_INTERNALID)
- 9 → Guest Category(GCT_CODE)
- 10 → RFID UID (RFID_ID)
- 11 → Manning Number/Safety Number
- 12 → Loyalty Number (UXP_A_FRQ_CARDNO)
- 13 → Pre generated Random Number (RES_PGIN)
- 14 → External ID (UXP_C_EXTERNALID)

peAccountStatus

The field identifies the account current reservation status. The following status values were defined:

- 0 → Reservations
- 1 → Checked-In
- 2 → Active (Reservations and Checked-in)
- 3 → Disembarked
- 4 → Disembarked Residents (Owners – Valid only for ResidenSea)
- 5 → Checked-In and all Reservation for the current cruise

peAccountType

The field identifies the account type. The following account types are defined:

If this field is ignored or blank then it will return all type.

- 0 → All
- 1 → Passenger (Guest)
- 2 → Resident (Guest)
- 3 → Crew member
- 4 → Group
- 5 → Visitor
- 6 → System account
- 7 → Staff
- 8 → Gift Card

pbIncludePicture

To include guest pictures in the return result, true will cause the query to take a longer time to return and expect a huge amount of data to return.

Return Value

Returns *True* when search is successful

Returns *False* when nothing found

for example, This is to search all check-in guest/crew stay in cabin 05002 and include the picture in response message

```
oResponse = goWS.FidelioSPMSWSXML("FCUIGuestInquiry", "SESSIONID",  
New Object() { "05002", 1, 1, 0, True})
```

Return Array of GuestInfo When success

CResponse.oGuest

This is the search result,

When single record is returned, the result will in JSON object format {}. When there are multiple record returned, it is an Array of GuestInfo class. Please refer detail in GuestInfo Class Details.

GuestInfo Class

Code	Type	Description	Required	SPMS DB Field reference
gnAccID	Integer	Account ID	✓	RES_ACC
geAccountType	Integer	Account Type	✓	RES_TAG
gbAllowPosting	Boolean	Account Enabled	✓	UXP_A_POSTING
gsName	String	Salutation, Forename and Surname	✓	UXP_A_SALUT, UXP_A_FSTN, UXP_A_NAME
gsCabin	String	Cabin Number	optional	RES_CAB
gdEmbDate	Date	Embarkation Date	✓	RES_EMB_E for expected accounts, RES_EMB_A for checked in accounts
gdDisDate	Date	Disembarkation Date	✓	RES_DIS_E for expected & checked in accounts, RES_DIS_A for checked out accounts
gdBirthDate	Date	Date of birth	optional	UXP_H_BIRTHD
gsEMail	String	E-mail address	optional	UXP_H_EMAIL
gnBalance	Decimal	Balance	✓	(UXP_A_POS_DEBIT - UXP_A_POS_CREDIT)
gsFirstName	String	First Name	✓	UXP_A_FSTN
gsLastName	String	Last Name	✓	UXP_A_NAME
gsSalutation	String	Salutations	✓	UXP_A_SALUT
gsTitle	String	Title	✓	UXP_A_TITEL
gsGender	String	Gender	✓	UXP_H_SEX
geAgeGroup	Integer	Minor	✓	Parameter "Adult Min Age" compared to Birthdate
gsLanguage	String	Language	✓	UXP_H_LANG
gsResStatus	String	Reservation Status	✓	RES_STATUS translated to E/C/D

Code	Type	Description	Required	SPMS DB Field reference
gsGroup	String	Group Id & Description [Id-Description]	optional	RES_GRP + UXP_A_NAME
gsGroupShoreID	String	Group ID	optional	RES_SHOREID(refer to Group)
gsCategory	String	Category Id & Description [Id-Description; Id-Description]	optional	GCT_CODE + TYP_GCT.TYP_COMMENT
gsAddress	String	Address	optional	UXP_A_STREET
gsStreet	String	Street	optional	UXP_A_STREET2
gsCity	String	City	optional	UXP_A_CITY
gsZip	String	ZIP Code	optional	UXP_A_ZIP
gsState	String	State	optional	UXP_A_STATE
gsCountry	String	Country Code	optional	UXP_A_COUNTRY
gsTel	String	Telephone Number	optional	UXP_H_TELNO
gnCreditLimit	Decimal	Credit Limit	optional	Credit limit as per assigned credit department code, unless individual credit limit is assigned in UXP_A_CRELIM
gsShipEMail	String	Ship's e-Mail Id	optional	RES_EMAIL_SHIP
gsPin	String	PIN Code	optional	RES_PIN_CODE
gsAuthKey	String	Authorization Key	optional	Refer to PAR Value for PAR- Interfaces- "AuthKey Criteria"
gsBookNo	String	Booking ID	optional	RES_BOOKNR
gsShoreID	String	Shore ID	optional	RES_SHOREID
gsVGuestID	String	Unique Guest ID	optional	RES_V_GUESTID
gsAward	String	Award Level	optional	RES_AWARD_LEVEL
gsBoardCard	String	On board Cabin Card	optional	RES_BOARDCC
gnRoutedAcc	Integer	Routed Account ID	optional	RES_QROUTE_AC
gbRoutedEnable	Boolean	Routed Account Enable	optional	UXP_A_POSTING(refer to the payer)

Code	Type	Description	Required	SPMS DB Field reference
gnRouteCreditLimit	Decimal	Routed Account Credit Limit	optional	Routed Account Credit limit as per assigned credit department code, unless individual credit limit is assigned in UXP_A_CRELIM
gsPassportCountry	String	Passport Nationality	optional	UXP_H_PASSPI_COUNTRY
gbyPicture	Byte Array	Guest Picture (Unlimited Length)	optional	SEC_IMAGE
gsCabinStewardName	String	Cabin Steward Name	optional	RES_ACC (linked to CAB_KEEPER)
gsHandicap	String	Handicap Description Separate by ASCII 28	✓	RES_HANDICAPCODE
gsHandicapRemark	String	Handicap Remarks	✓	RES_HANDIREMARKS
gsMusterStation	String	Muster Station Description	✓	MST_NAME
gbOnboard	Boolean	Onboard/Shoreside status	✓	RES_OFFBOARD
gsSafetyNo	String	Safety Number	optional	UXP_C_POS
goSafetyMusterStation	Class	Muster Station Class	optional	ORG_ASSEMBLY(linked to MST_ID), MST_NAME
goEmergencyMusterStation	Array of Class	Muster Station Class 0 to 5	optional	ORG_E_MST1 to ORG_E_MST6(linked to MST_ID), MST_NA<E
gbNoSafetyDrill	Boolean	Excuse From Safety Drill (Yes/No)	optional	UXP_C_NODRILL
gePicture	Integer	Picture Source	✓	SEC_SOURCE
gdLastPictureDate	Date	Picture Last Modified Date Time	optional	SEC_MODDATE
gsFreqCardNo	String	Frequent Traveller Card Number	✓	UXP_A_FRQ_CARDNO
gsPriceCategory	String	Price Category	✓	RES_PCATEGORY
gsCabinType	String	Cabin Type	✓	CAB_TYPE

Code	Type	Description	Required	SPMS DB Field reference
gnNoneRefundableCredit	Decimal	None Refundable Credit Balance	optional	UXP_A_NR_BAL
gnCurrentCruiseID	Integer	Current Cruise ID	optional	SCR_ID
gsPassportNo	String	Passport Number	optional	UXP_H_PASSNO
gsPaymentDep	String	Default Payment Type	optional	RES_DEP_PAY
gsClassification	String	Reservation Classification/Vip Flag	optional	RES_CLASSIFICATION
gdSysdate	Date	SPMS System Date	✓	sys_date
gdCurrentCruiseStartDate	Date	Current Cruise Start Date	✓	scr_a_date of current cruise
gnPGID	Integer	Pregenerated Random ID	✓	RES_PSID
gsCruiseItineraryID	String	Cruise external system identifier	✓	SCR_ITN_ID
gsResReference	String	External reservation ID	✓	RES_REFERENZ
gsDeck	String	Cabin deck code	optional	CAB_DECK
gsExternalID	String	External Crew ID	✓	UXP_C_EXTERNAL_ID

MusterStation Class

Code	Type	Description	Required	SPMS DB Field reference
gsCode	String	Code	✓	MST_ID
gsName	String	Name	✓	MST_NAME

gnAccID

The field identifies the unique account (person) identification. The field is an internal, unique account (person) number (I type).

geAccountType

The field identifies the account type. The following account types are defined:

- 1 → Passenger (Guest)
- 2 → Resident (Guest)
- 3 → Crew member
- 4 → Group
- 5 → Visitor

-
- 6 → System account
 - 7 → Staff
 - 8 → Gift Card

gbAllowPosting

The field identifies the information if an account is enabled (True) or disabled (False).

gsName

The field identifies the salutation, forename and surname fields (separated with space) of an account (person).

gsCabin

The field identifies the cabin number that the account (person) occupies. If the account number is returned (not a person) cabin number field is omitted.

gdEmbDate

The field identifies the date and the time the account (person) is expected or embarked.

gdDisDate

The field identifies the date and the time the account (person) is expected to disembark.

gdBirthDate

The field identifies the person date of birth. If the account number is returned (not a person) or date of birth is not present, the field is omitted.

gsEMail

The field identifies the person e-mail address. If the account number is returned (not a person) or e-mail is not present, the field is omitted.

gnBalance

The field identifies the account (person) current balance. This field can return positive (account is to be invoiced) or negative (account prepaid) value.

gsFirstName

The field identifies the forename of an account (person).

gsLastName

The field identifies the surname of an account (person).

gsSalutation

The field identifies the salutation of an account (person).

gsTitle

The field identifies the title of an account (person).

gsGender

The field identifies the gender of an account (person).

geAgeGroup

0 - Adult

1 - YoungAdult

2 - Minor

gsLanguage

The field returns the language of an account (person).

gsResStatus

The field identifies the reservation status [E-Expected, C-Checked-In, D-Departed] of an account (person).

gsGroup

The field identifies the group Id & the name of the group if a passenger is assigned to a group.

gsGroupShoreID

The field identifies the group shore id of the group if a passenger is assigned to a group.

gsCategory

The field identifies the category Ids & the names of the categories if a passenger is assigned any categories.

gsAddress

The field identifies the address (Line 1).

gsStreet

The field identifies the street (Line 2).

gsCity

The field identifies the city.

gsZip

The field identifies the zip code.

gsState

The field identifies the state.

gsCountry

The field identifies the country code.

gsTel

The field identifies the telephone number.

gnCreditLimit

The field identifies the credit limit set for the person(s).

gsShipEMail

The field identifies the Ship's e-Mail Id for the person(s).

gsPin

The field identifies the telephone PIN code for the person(s). The valid character is 0,1,2,3,4,5,6,7,8,9. Leading zero support depend on SPMS Parameter setting.

gsAuthKey

The field identifies the authorization key for the person(s).

gsBookNo

The field identifies the booking id.

gsShoreID

The field identifies the shore id.

gsVGuestID

The field identifies the unique guest id.

gsAward

The field identifies the guest award level.

gsBoardCard

It contains Track 2 field 1 value of the on board cabin card excluding start sentinel and end sentinel.

for example, The value encode in track 2 is ;9910000657580701=20060810?, we will only send 9910000657580701

gnRoutedAcc

The field identifies the routed account id (payer account id).

gbRoutedEnable

The field identifies the information if the routed account is enabled (1) or disabled (0).

gnRouteCreditLimit

The field identifies the credit limit set for the routed person(s) (payer account).

gsPassportCountry

The field identifies the guest passport nationality

gbyPicture

The field identifies the guest pictures. This data is in byte array, to retrieve the picture for all guest may take a long time.

gsCabinStewardName

The field identifies the housekeeper assign to this cabin

gsHandicap

If the guest had handicapped, it will be shown as, for normal guest it will be blank for example, Wheel Chair Require<FS>Deaf

gsHandicapRemark

This is special remark for the handicapped guest.

gsMusterStation

The master station associate with the guest

gbOnboard

True-Onboard, False-Shoreide

gsSafetyNo

Safety Number (Only apply to crew only)

goSafetyMusterStation

Return MusterStation Class with Safety Muster Station Code and Description (Only apply to crew only)

goEmergencyMusterStation(5)

Return MusterStation Class with Emergency Muster Station Code and Description (The emergency type is user define) (Only apply to crew only)

gbNoSafetyDrill

Excuse From Safety Drill (Only apply to crew only)

gePicture

Picture Source

-1 = No Picture

0 = Unknow

1 = Web Cam

2 = RFID Passport

3 = Scan Passport Image

4 = Guest History

gdLastPictureDate

Picture Last Modified Date, due to the size of the picture, it is not efficient to return the picture in FCUIGuestInquiry message, so what you need to do is compare the last modified date of the picture stored in your DB and if the picture had been updated, send WSFunction with GuestPicture and gnAccID as parameter message to get the picture in a separate call.

gsFreqCardNo

Frequent Traveller Card Number

gsPriceCategory

Booking Price Category (res_pccategory)

gsCabinType

Cabin Type

gnNoneRefundableCredit

None Refundable Credit, there is an option set in Web.Config to indicate do not return None Refundable credit if the guest search is x number of more, this is for performance purpose. Default is 5

gnCurrentCruiseID

Current Cruise ID

gsPassportNo

Passport Number

gsPaymentDep

Default payment department ID

gsClassification

This field identified the reservation classification/VIP Flag.

gdSysdate

Current SPMS System Date.

gdCurrentCruiseStartDate

Current cruise start date.

gnPGID

Pregenerated Random Number

gsCruiseItnID

Cruise external system identifier

gsResReference

External reservation ID

gsDeck

Cabin Deck code

gsExternalID

External Crew ID

94. Function: FCUIPosting

This web method function will post to the SPMS account base on the input parameter, this is mainly for generic usage, this is compatible with FCUI Posting.

Note: Not supported when connecting to offline QCI Sync DB

Parameter	Type	Description	Required
psSearchStr	String	Search String	✓
peSearchType	Integer	Search String type	✓
peAccountStatus	Integer	Account Status	✓
peAccountType	Integer	Account Type	✓
pbIncludePicture	Boolean	Include Guest Picture in Return Result	✓
poPosting	PostingDetails Class	The is the Posting Data	✓

The following is a description of the parameters.

psSearchStr

Entered by the external system operator (manually or through a magnetic card reader) and generally contains any information necessary to identify the account. The field can be an account number, card number, cabin number or person name.

peSearchType

The field identifies the type of entry in the Account ID field. The following Account ID Entry Types are defined:

- 0 → Card identification number (RES_BOARDCC)
- 1 → Cabin number or System account (RES_CAB/UXP_A_SYS_ACC)
- 2 → Name of a person or company account(UXP_A_NAME_N)
- 3 → Internal identification number (UXP_A_ID)
- 4 → Group Id number (RES_GRP)
- 5 → External identification number (RES_BOOKNR)
- 6 → Phone trunk number (CAB_TEL or CAB_TEL2)
- 7 → e-mail Id (UXP_H_EMAIL or RES_EMAIL_SHIP)
- 8 → Internal Id number(UXP_C_INTERNALID)
- 9 → Guest Category(GCT_CODE)
- 10 → RFID UID (RFID_ID)
- 11 → Loyalty Number (UXP_A_FRQ_CARDNO)
- 12 → Manning Number/Safety Number

13 → Pre generated Random Number (RES_PGID)

peAccountStatus

The field identifies the account current reservation status. The following status values were defined:

- 0 → Reservations
- 1 → Checked-In
- 2 → Active (Reservations and Checked-in)
- 3 → Disembarked
- 4 → Disembarked Residents (Owners – Valid only for ResidenSea)
- 5 → Checked-In and all Reservation for the current cruise

peAccountType

The field identifies the account type. The following account types are defined:

If this field is ignored or blank then it will return all type.

- 0 → All
- 1 → Passenger (Guest)
- 2 → Resident (Guest)
- 3 → Crew member
- 4 → Group
- 5 → Visitor
- 6 → System account
- 7 → Staff
- 8 → Gift Card

pbIncludeIncludePicture

To include guest pictures in the return result, true will cause the query to take a longer time to return and expect a huge amount of data to return.

poPosting

Information of the transactions to be posted.

Please refer to PostingDetails Class for more detail

Return Value

CResponseXml.oObj(0) Returns 0 when update is successful

CResponseXml.oObj(0) Returns 1 when update has failed

CResponseXml.oObj(0) Returns 2 when the search string return more than 1 person, it is recommend to use Unique Account ID to make sure it is unique.

CResponse.oGuest

This is the search result; it is an Array of GuestInfo class.

It will have 1 record if return result is 0.
It will have 0 or 1 record if return result is 1 depend on fail reason.
It will more than 1 record if return result is 2.
Please refer detail in GuestInfo Class Details.

CResponse.oObj(1) = Pos Transactions ID, only valid when CResponse.oObj(0) = 0

for example, Posting using unique account id, exclude picture from response message

```
Dim oPosting As New FidelioSPMSWS.PostingDetils
With oPosting
    .gbCallPosting = False
    .gbForcePosting = False
    If File.Exists("c:\signature.jpg") Then
        .gbyCheckImage = File.ReadAllBytes("c:\signature.jpg")
    End If
    .gsCheckImage = <Check Image>
    .gsItemDetail = "1234<FS>Cashier 1<FS>1<FS>0<FS>Gift
Shop<FS>205789412|T-Shift|1|100.00"
    .gsPin = ""
    .gsPosInfo = "Remark"
    .gsUniquePostingID = "FIDELIO123456" 'You have to generate you
own unique number
End With
ReDim oPosting.goPosting(0)

oPosting.goPosting(0) = New FidelioSPMSWS.PostingTotal
With oPosting.goPosting(0)
    .gnInvoiceWin = 0
    .gnPostingDiscount = 0.00 'No Discount
    .gnPostingServiceCharge = 10.00 '10% Service Charge
    .gnPostingTax = 5.00 '5% Tax
    .gnPostingTip = 0.00
    .gnPostingTotal = 115.00
    .gnServingPeriod = 0
    .gnCallDuration = 0
    .gsCallNoDialed = ""
    .gsCallType = ""
    .gsOutletID = "123" 'This value need to setup in SPMS dep
mapping
    .gdCallStart = Now() 'This is only use for call posting
End With

oResponse = goWS.FidelioSPMSWSXML("FCUIPosting", "SESSIONID", New
Object() { 2358, 3, 1, 0, False, oPosting})
```

For JSON you need to serialize the object to string first

```
Example using JSON.stringify():

<script type="text/javascript">

    // A valid json string
    var someObject = {};
    someObject.someProperty = "someValue";

    // jsonString now contains a JSON string representation of someObject
    var jsonString = JSON.stringify(someObject);

    // Will display the string '{"someProperty":"someValue"}'
    alert(jsonString);

</script>
<
```

Sample Json HTTP Post

POST /FCWebServices/FCWebServices.asmx/FidelioSPMSWSJsonPost HTTP/1.0

Host: localhost

Content-Length: 1771

```
{callback:"Testing",psSessionID:"ad765829-3fb7-4f1b-9754-587d43a879ab",psFunction:"FCUIPosting",psParam:["2440167",3,1,0,true,"{\\"gbCallPosting\\":false,\\"gsPin\\":\\"\\",\\"gsUniquePostingID\\":\\"1234\\",\\"gsCheckImage\\":\\"INVOICE - EXAMPLE COMPANY \\\\r\\\\n      BLUE LAGOON      \\\\r\\\\n1 CASHIER 1\\\\r\\\\n-----\\\\r\\\\n1/1      4578 GST 1\\\\r\\\\n      JUN12'07 6:44PM      \\\\r\\\\n-----\\\\r\\\\n 1 LIBRA FRIED RICE 12.34\\\\r\\\\n  DISCOUNT\\\\t\\\\t2.10- \\\\r\\\\n  SERVICE CHARGE 0.12 \\\\r\\\\n  TIP 1.00 \\\\r\\\\n  TOTAL PAID 11.36 \\\\r\\\\n 05000\\\\r\\\\n XXXN070612184500\\\\r\\\\n  MANUAL ENTRY\\\\r\\\\n Cabin/Acc:05000\\\\r\\\\n Ms TONG JEN LEE\\\\r\\\\n  CABIN CHARGE 11.36 \\\\r\\\\n---1168 CLOSED JUN12 6:45PM--- \\\\r\\\\n  . \\\\r\\\\nSIGN:.....\\\\r\\\\n  . \\\\r\\\\nA II Amounts in US Dollars (USD$)\\\"gbByCheckImage\\":null,\\"gsPosInfo\\":\\"\\",\\"gsItemDetail\\":\\"1234?Cashier 1?1?0?Gift Shop?205789412|T- Shift|1|12.34\\",\\"gbForcePosting\\":false,\\"goPosting\\":{\\\"gnServingPeriod\\":0,\\"gnPositingTotal\\":10.01,\\"gnPostingDiscount\\":1.01,\\"gnPostingServiceCharge\\":1.02,\\"gnPostingTip\\":1.03,\\"gnPostingTax\\":1.04,\\"gnInvoiceWin\\":0,\\"gsOutletID\\":\\"264\\",\\"gdCallIStart\\":\\"20130620100105\\",\\"gsCallNoDialed\\":\\"12345678\\",\\"gnCallDuration\\":159,\\"gsCallType\\":\\"Sat\\"},{\\"gnServingPeriod\\":0,\\"gnPostingTotal\\":11.0,\\"gnPostingDiscount\\":1.01,\\"gnPostingServiceCharge\\":1.02,\\"gnPostingTip\\":1.03,\\"gnPostingTax\\":1.04,\\"gnInvoiceWin\\":0,\\"gsOutletID\\":\\"262\\",\\"gdCallStart\\":\\"20130620100105\\",\\"gsCallNoDialed\\":\\"12345678\\",\\"gnCallDuration\\":259,\\"gsCallType\\":\\"Sat\\"}]}]
```

PostingDetils Class

Code	Type	Description	Required
gbCallPosting	Boolean	Indicate this is call posting	✓

Code	Type	Description	Required
gsPin	String	PIN Code	✓
gsUniquePostingID	String(20)	Unique Posting ID	✓
gsCheckImage	String	Receipt image	✓
gbyCheckImage	Byte Array	Receipt image including signature in JPG format	✓
gsPosInfo	String	Notes	✓
gsItemDetail	String(x)	Refer Item Detail for	✓
gbForcePosting	Boolean	True-Allow posting even the guest has reached his credit limit or posting is disabled. False-Normal posting	✓
goPosting	Array of PostingTotal Class	Refer to PostingTotal Class	✓

gbCallPosting

If this is called posting the behavior will be the same as gbForcePosting with the exception that for call posting even the guest is not found it will post to system error account.

Also, it will use a different data in the goPosting.

For normal posting, it will return 2 when more than 1 guest found but for call posting, it will post to the first guest.

gsPin

The field identifies the telephone code of the reservation account. The valid character is 0,1,2,3,4,5,6,7,8,9. Leading zero support to depend on SPMS Parameter setting.

Pass in the empty string is not in use.

gsUniquePostingID

The field identifies the bill (check) uniquely within the whole external system. The field is used as a cross-reference to obtain detailed information about all the transactions recorded on a check.

gsCheckImage

The field identifies the receipt image that shows the same data as printed on the customer receipt. This should be plain text with CR & LF characters separating each line of the text. It should be formatted to be displayed using non-proportional fonts. Pass in the empty string is not in use.

gbyCheckImage

This is the customer receipt include a digital signature.

You can use the below VB .NET sample code to merge the text base check image with JPG digital signature. Pass in nothing if not in use

```

oImage = MergeCheckAndSignatureImage(TextToImage(gsCheckImage), oSignature)

Private Function MergeCheckAndSignatureImage(ByVal poCheckImage As Image, ByVal poSignatureImage As
System.Drawing.Image) As Image
    MergeCheckAndSignatureImage = Nothing
    Try
        'check Width of check and signature image
        'width
        If Not poCheckImage.Width = poSignatureImage.Width Then
            Dim oNewImage As Image = ResizeImage(poCheckImage, poSignatureImage)
            poSignatureImage.Dispose()
            poSignatureImage = oNewImage
        End If

        Dim oImage As New Bitmap(Math.Max(poCheckImage.Width, poSignatureImage.Width),
poCheckImage.Height + poSignatureImage.Height)

        Dim gGraphic As Graphics = Graphics.FromImage(oImage)

        gGraphic.DrawImage(poCheckImage, New Point(0, 0))
        gGraphic.DrawImage(poSignatureImage, New Point(0, poCheckImage.Height))

        gGraphic.Dispose()
        gGraphic = Nothing
        poCheckImage.Dispose()
        Return oImage

    Catch ex As Exception

    End Try
End Function

'Resize image if check width is larger than signature width ,if the signature image not same width as check
image, the picture seems a bit out of place (please see, signature.jpg)

Private Function ResizeImage(ByVal poRefenceImage As Image, ByRef poTargetImage As Image) As Image
    Dim oCurrentImage As New Bitmap(poTargetImage)
    Dim oNewImage As New Bitmap(poRefenceImage.Width, poTargetImage.Height)
    Dim oGraphic As Graphics = Graphics.FromImage(oNewImage)

    oGraphic.InterpolationMode = Drawing2D.InterpolationMode.HighQualityBicubic
    oGraphic.DrawImage(oCurrentImage, New Rectangle(0, 0, poRefenceImage.Width, poTargetImage.Height), _
        New Rectangle(0, 0, oCurrentImage.Width, oNewImage.Height), GraphicsUnit.Pixel)
    oGraphic.Dispose()
    oCurrentImage.Dispose()
    Return oNewImage
End Function

Private Function TextToImage(ByVal psText As String) As Image
    Dim oGra As Graphics

```

```

Dim sStr() As String
Dim oImage As Image

sStr = Split(psText, vbNewLine)
oImage = New Bitmap(32 * 7, sStr.Length * 12.2 + 18, PixelFormat.Format32bppArgb)
oGra = Graphics.FromImage(oImage)
oGra.FillRectangle(Brushes.White, 0, 0, CSng(32 * 7), CSng(sStr.Length * 12.2 + 18))
oGra.DrawString(psText, New Font("Courier New", 8), Brushes.Black, 0, 30)
oGra.DrawImage(oImage, New PointF(0, 0))
TextToImage = oImage
End Function

```

gsPosInfo

The field identifies the additional information sent by 3rd party system.

gsItemDetail

The reason we do not want to use class object because we want to maintain compatibility with FCUI

This field identified the items ordered on the external system. The field contains many sub field, each field is separated with <FS>. If the external systems do not have the particular field just pass in the default value indicated in the bracket.

Field	Type	Description
1	Integer	Employee Number (Default 0)
2	String(30)	Employee Name (Default Blank)
3	Integer	Guest Count (Default 0)
4	Integer	Table Number (Default 0)
5	String(60)	Outlet Name
6	String	Variable Length field. Each record will have 6 fields and separate by pipe " ", each field will be separated by comma "," Field 1: Item Number (9) Field 2: Item Name X(50) Field 3: Quantity (9) Field 4: Sales Total (9.9) Field 5: 1=Voided,0=Normal Field 6: 1=Refunded,0=Normal

for example, Guest A order 1 T-Shirt for 10.00 and 2 Key Chain for 2.50 each

1234<FS>Cashier 1<FS>1<FS>0<FS>Gift Shop<FS>205789412,T-Shift,1,10.00,0,0 | 205789123,Key Chain,2,5.00,0,0

gbForcePosting

True-Allow posting even the guest has reached his credit limit or posting is disabled (This only apply to check-in guest only), the posting will fail if the guest not found

PostingTotal Class

Code	Type	Description	Required
gnServingPeriod	Integer	Serving Period	✓
gnPostingTotal	Decimal	Posting Total	✓
gnPostingDiscount	Decimal	Discount Total	✓
gnPostingServiceCharge	Decimal	Service Charge Total	✓
gnPostingTip	Decimal	Tip Total	✓
gnPostingTax	Decimal	Tax Total	✓
gnInvoiceWin	Integer	Invoice Windows (0 – 3)	✓
gsOutletID	String(13)	Outlet ID	✓
gdCallStart	Date	Call Start Date or Time (For Call Accounting Posting)	✓
gsCallNoDialed	Integer	Dialed Number (For Call Accounting Posting)	✓
gnCallDuration	Integer	Call Duration (For Call Accounting Posting)	✓
gsCallType	String	Call Type (For Call Accounting Posting)	✓

gnServingPeriod

The field identifies the serving period number that is active when the charge is posted. Pass in 0 if not in use.

gnPostingTotal

The field identifies the actual amount (gross) is posted. This value represents value in full (including discount, service charge and tip). This field can have positive (account is debited) or negative (void) value.

gnPostingDiscount

The field identifies the total amount of discounts taken against the transaction total amount. This field can have positive (account is debited) or negative (void) value.

gnPostingServiceCharge

The field identifies the total amount of any automatic percentage add-on amounts to the transaction total. This field can have positive (account is debited) or negative (void) value.

gnPostingTip

The field identifies the total amount of any add-on amounts to the transaction total such as

tips, cover charges etc. This value is typically entered manually as per customer specification. This field can have positive (account is debited) or negative (void) value.

gnPostingTax

The field identifies the total amount of any tax to the transaction total. This field can have positive (account is debited) or negative (void) value.

gnInvoiceWin

The invoice windows, a valid value is from 0 to 3, any invalid value will default to 0

gsOutletID

The field identifies the revenue center of the outlet from which the charge originated. The FCSPMS description equivalent of the Outlet ID will be displayed or printed on a customer invoice.

gdCallStart

The field identifies the date and the time when the phone call started. Full date and time format is required.

gsCallNoDialed

The field identifies the phone number called.

gnCallDuration

The field identifies the phone call duration in seconds.

gsCallType

The field identifies the phone call type. The following types are defined:

- VL → Line Voice Call
- VC → Cellular Voice Call
- VS → Satellite Voice Call
- VN → Non-chargeable Voice Call
- FL → Line Fax
- FC → Cellular Fax
- FS → Satellite Fax
- FN → Non-chargeable Fax
- DL → Line Data Call
- DC → Cellular Data Call
- DS → Satellite Data Call
- DN → Non-chargeable Data Call

95. Function: SearchComment

This web method function searches for guest comment.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="SearchComment", below is the list of poParam

For Array field, pass in empty array or Nothing to skip this checking

For JSON the array of string will be a string separated by “,”, each string must start with Open Double Quote and end with Open Double Quite.

for example,

“A,”,“B,” = 2 Elements

Element 1 = A,

Element 2 = B,

Code	Type	Description	Required
pdFrom	Date	From date range	✓
pdTo	Date	To date range	✓
psCabin	Array of String	List of Cabin	optional
pnUserID	Array of Long	List of user who created the comment	optional
psComplaintCode	Array of String	List of Comment Description Code (TYP_CPL.TYP_ART)	optional
psReportType	Array of String	List of Report Type Code (TYP_CPI,TYP_ART)	optional
psCategory	Array of String	List of Comment Category (TYP_CMC.TYP_ART)	optional
peDone	Integer	0 - All,1 - Done, 2 - Not Done	optional
peUrgent	Integer	0 – All, 1 – Urgent, 2 – Not Urgent	✓
peSensitive	Integer	0 – All, 1 – Sensitive, 2 – Not Sensitive	✓
peGuestType	Integer	0 – All, 1 – Crew, 2 – Staff, 3 – Crew and Staff, 4 - Guest	✓

Code	Type	Description	Required
psDeptInvolved	Array of String	Department Involved code (TYP_CDI.TYP_ART)	✓
psOperationPosition	Array of String	Operation Position (OPO_ID), operation position is link to department involved	optional
pbIncludePicture	Boolean	True = Will return the comment picture/document False = Will return nothing, this is for slow device, so it will need to look up the picture using WSF using the value CPL_XDOC_ID, default = True	optional
pnAccID	Array of Integer	List of Account ID	optional

for example,

This is to search all comment for cabin 05000 and 05002

```
oResponse = FidelioWS("SearchComment", New Object()
{DateTime.SpecifyKind(<From Date>, DateTimeKind.Unspecified), _
DateTime.SpecifyKind(<To Date>, DateTimeKind.Unspecified), _
New String() {"05002", "05000"}, Nothing, Nothing, Nothing, _
Nothing, 0, 0, 0, Nothing, Nothing, False, False, Nothing})
```

Return Value

CResponseXml.bSuccess = False when SearchComment has failed

CResponseXml.bSuccess = True when SearchComment is successful, CResponse.oDataset will have 1 DataTable if paging is not use 2 DataTable is paging is use (Login.pnRowsPerPage > 0), please take note all the same cpl_link_id will be return with the exception of psCabin and pnAccID.

ADO.NET DataTable field structure for data table for table 1 when paging is in use

Code	Type	Description
CPL_LINK_ID	Integer	Link ID between the parent comment and child comment and resolution and also link to multiple guest comment
CPL_ACC_ID	Integer	Link ID between the parent comment and child comment and resolution and also link to multiple guest comment
CPL_RES_DONE	Integer	0 – Not Resolved, 1 - Resolved

ADO.NET DataTable field structure for data table for table 1 (paging not in use), table 2(paging in use).

Code	Type	Description
CPL_ID	Integer	Unique ID
CPL_LINK_ID	Integer	Link ID between the parent comment and child comment and resolution and also link to multiple guest comment
CPL_ACC_ID	Integer	Account ID
CPL_USR_ID	Long	User who create the comments/resolution
CPL_TYPE	String	C-Comment, R-Resolution
CPL_DATE	Date	Date/Time the comment/resolution created
CPL_EXT_ID	String	External Code.
CPL_DESCR_CODE	String	Comment Description Code (TYP_CPL.TYP_ART) Resolution Description Code (TYP_RES.TYP_ART)
CPL_DESCR	String	Comment/Resolution Description
CPL_COMMENT	String	Comment/Resolution Comment
CPL_REQ_RES_DATE	Date	Requested Resolution Date.
CPL_RES_DONE	Integer	0 – Not Resolved, 1 - Resolved
CPL_RES_BY	String	Person who done the resolution
CPL_RES_DATE	Date	Resolution Resolved Date
CPL_RES_COST	Decimal	Comment/Resolution Associate Cost.
CPL_REPORT_TYPE	String	Define Comment Reporting Method.
CPL_URGENT	Integer	0-Default;1-Urgent
CPL_CRW_ID	Integer	The Crew link to the CPL_USR_ID
CPL_SENSITIVE	Integer	0-Default;1-Sensitive
CPL_TYP_CMC	String	Comment Category Code (TYP_CMC.TYP_ART)
CPL_XDOC_ID	Integer	Scan Document/Picture, Link to xdoc_id.
CPL_VID	String	External Unique ID for use with import
CPL_VEN_ID	Integer	Vendor ID, link to VEN.VEN_ID
CPL_INTERNAL	Integer	Internal Usage Flag
CPL_DEPARTMENT_INVOLVED	String	Comment Department Involved Codes. Separated by comma (,) (TYP_CDI.TYP_ART)

Code	Type	Description
CRW_NAME	String	Crew Name who created the comment/resolution base on the crew link in user setup
UXP_A_TAG	String	P-Pax, C-Crew or Staff
NAME	String	Guest Name
RES_CAB	String	Cabin Number
CATEGORY	String	Comment Category Description
REPORTTYPE	String	Comment Report Type Description
DESCRCODE	String	Comment Description Code Description
XDOC_FILE	Array of Byte	The doc/picture uploaded
XDOC_FILENAME	String	The filename of the doc/picture, use the file extension to determine if it is a document or picture
XDOC_ISPICTURE	Integer	1-This is a picture,0-This is a document, need to use the XDOC_FILENAME to determine the document type

96. Function: DeleteComment

This function will delete the guest comment.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="DeleteComment", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnCplID	Integer	Unique Guest Comment ID	optional
pnCplLinkID	Integer	Guest Comment Link ID	optional

You need to pass in either pnCplID or pnCplLinkID

If pnCplLinkID > 0 mean it will delete all comment include resolution for the same link id

If pnCplId > 0 then it will only delete the single comment (only the comment will be deleted)

Return Value

CResponseXml.bSuccess = False when Delete failed.

CResponseXml.bSuccess = True when Delete successful.

for example,

```
oResponse = FidelioWS("DeleteComment", New Object() {1234,0})
```

97. Function: DeleteResolution

This function will delete the guest comment.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="DeleteResolution", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnCplLinkID	Integer	Guest Comment Link ID	✓

Once the resolution is to delete all comments will be set to not done.

Return Value

CResponseXml.bSuccess = False when Delete failed.

CResponseXml.bSuccess = True when Delete successful.

```
oResponse = FidelioWS("DeleteResolution", New Object() {1243})
```

98. Function: UpdateComment

This function will add or update the guest comment.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="UpdateComment", below is the list of psParam or poParam

Parameter	Type	Description	Required
peQuickAssignment	Integer	0=None,1-Same Cabin,2-Same Booking No,3-Same Group, this apply to new comment only, when adding a new comment. If the value is > 0 it will add the same comment to those related guest	✓
pnCplID	Integer	Unique Comment ID (0 for add new)	✓
pnCplLinkID	Integer	This is the comment link id, use to update the comment create with Quick Assignment only apply to parent comment	✓
pnAccID	Integer	Unique Account ID	✓
psComment	String(1500)	Comment Description	✓
psCommentCategory	String(6)	Comment Category (TYP_CMC.TYP_ART)	✓
pnCost	Decimal	Comment/Resolution Cost	✓
psDepartmentInvolve	Array of String(6)	List of Department Involve Code (TYP_CDI.TYP_ART)	✓
psDescCode	String(6)	Comment Description Code (TYP_CPL.TYP_ART) Resolution Description Code (TYP_RES.TYP_ART)	✓
psDesc	String(1500)	Comment Description	✓
psExternalCode	String(20)	External ID	✓
psFileName	String(300)	The is the original filename of the uploaded doc. Picture, it uses the file ext to determine if the document is a doc or a picture, file ext .DOC, .DOCX and .PDF will be considered a document and the rest as picture.	✓
pbInternal	Boolean	Internal Flag	✓
psInvolvePerson	String(50)	Person who done the resolution or Person who reported the complaint	✓

Parameter	Type	Description	Required
pbComment	Boolean	True = Comment, False = Resolution	✓
pbSensitive	Boolean	Sensitive Flag	✓
pbUrgent	Boolean	Urgent Flag	✓
pbyPicture	Array of Byte	This can be a document or a picture, max size 4,000,000	✓
psReportType	String(6)	Report Type (TYP_CPI.TYP_ART)	✓
pdRequestDate	Date	Requested resolution date	✓
pbResolved	Boolean	This only applies to resolution	✓
pdResolvedDate	Date	Resolved Date	✓
pnVendorID	Integer	Vendor ID, we either send the Account ID or Vendor ID	✓
psVid	String(100)	External Unique ID for use with import	✓
pnXDocID	Long	Unique XDOC ID, the table where the picture is stored	✓
		If the value pass in = 0 and picture pbyPicture is passed in, it will create a new record and delete the old record	
		If the value pass in > 0 and picture pbyPicture is pass in, it will overwrite the existing record	
		If the value pass in = 0 and pbyPicture is nothing then it will delete the existing record	
		If the value pass in > 0 and pbyPicture is nothing then it will keep the existing record	

Return Value

CResponseXml.bSuccess = False when Update/Add failed.

CResponseXml.bSuccess = True when Update/Add successful.

CResponseXML.oObj(0) = cpl_id, comment unique id

CResponseXML.oObj(1) = cpl_link_id, comment link id

Add new comment

```
oResponse = FidelioWS("UpdateComment", New Object() {0, 0, 0, 12345, "Comment", _
"CAT1", 0.00, New String() {"HSE"}, "MISB", "Missing Bag", "", "Bag.jpg", False, "Person Name", True, False, Yes,
```

```
File.ReadAllBytes("Bag.Jpg"), "FD", DateTime.SpecifyKind(Now(),  
DateTimeKind.Unspecified), False, DateTime.SpecifyKind(Now(),  
DateTimeKind.Unspecified), 0, "", 0})
```

Update existing comment

```
oResponse = FidelioWS("UpdateComment", New Object() {0, 456, 457,  
12345, "Comment", "CAT1", 0.0, New String() {"HSE"}, "MISB",  
"Missing Bag",  
"", "Bag.jpg", False, "Person Name", True, False, Yes,  
File.ReadAllBytes("Bag.Jpg"), "FD", DateTime.SpecifyKind(Now(),  
DateTimeKind.Unspecified), False, DateTime.SpecifyKind(Now(),  
DateTimeKind.Unspecified), 0, "", 0})
```

100. Function: UpdatePromoterStatus

This function will inform the SPMS the promotion had been view in the web client.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="UpdatePromoterStatus", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnPrdID	Integer	Promotion ID	✓
pnAccID	Integer	Unique Account ID	✓
psCode	String(20)	Promotion Code (This code is return from WSF->GetPromotWebClient in field ese_id)	✓

Return Value

CResponseXml.bSuccess = False when update failed.

CResponseXml.bSuccess = True when update successful.

```
oResponse = FidelioWS("UpdatePromoterStatus", New Object() {3565,  
12345, "73B"})
```

101. Function: UpdateWorkOrderImage

This function will add or update the maintenance work order additional image.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="UpdateWorkOrderImage", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnMwpID	Integer	Unique Work Order Image ID(0 for add new record)	✓
pnMwrID	Integer	Unique Work Order ID	✓
psFileName	String(50)	Original filename of the image file	✓
psComment	String(100)	Comment on the image	✓
pbyImage	Byte Array	Image	✓

Return Value

CResponseXml.bSuccess = False when Update/Add failed.

CResponseXml.bSuccess = True when Update/Add successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML ("UpdateWorkOrderImage",
"SessionID", New Object() {12345,123457,"Cabin.jpg","Shower not
working",<Image byte array>")
```

102. Function: DeleteWorkOrderImage

This function will delete the maintenance work order image.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="DeleteWorkOrderImage", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnMwpID	Integer	Unique Work Order Image ID	✓

Return Value

CResponseXml.bSuccess = False when Delete failed.

CResponseXml.bSuccess = True when Delete successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("DeleteWorkOrderImage",
"SessionID", New Object() {12345})
```

103. Function: PurchasePackage

This function is used to Purchase Package Plan, please refer to FCWSFunction Technical Specification 7 30 872.docx->GetPackagePurchase how to get a list of package preset to the user for selection.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="PurchasePackage", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	Unique Account ID	✓
pnPpnID	Integer	Unique Package Plan ID	✓
pnRvc	Integer	Micros Revenue Center Number	✓
psRvcName	String(30)	Micros Revenue Center Name	✓
pnEmpl	Long	Micros Employee Number	✓
pnWSID	Long	Micros Workstation ID	✓
pbyImage	Byte Array	Signature Image	optional

Return Value

CResponseXml.bSuccess = False when Purchase failed.

CResponseXml.bSuccess = True when Purchase successful. CResponseXml.oObj return the check image for printing

for example,

```
oResponse = goWS.FidelioSPMSWSXML("PurchasePackage", "SessionID",
New Object() {12345,123457,1,"Restaurant",1234,1,<Signature Image
byte array>}
```

User WSFunction->GetPackagePurchase to get a list of available package to purchase

107. Function: UpdateCreditLimit

This function will update the guest credit limit, the credit limit also depends on the payment type, if the credit limit > payment type credit limit, it will take the payment type credit limit.

psFunction="UpdateCreditLimit", below is the list of psParam or poParam

Parameter	Type	Description	Required
peSearchType	Enum	InternalID = 0 'res_acc PGID = 1 'res_pgid BoardCard = 2 'res_boardcc PaxID = 3 'res_referenz	✓
psSearchStr	String	Unique Payer Account ID or Board Card or PGID or Pax ID depends on the peSearchType	✓
psCreditLimit	Decimal	The credit limit, -1 for unlimited	✓
pbDailyLimit	Boolean	This applies to the buyer only, this requires the PAR->General->Check Buyer Limit to be enabled. True – The amount is daily limit False – The amount is cruise limit	✓

Return Value

CResponseXml.bSuccess = False when Update failed.

CResponseXml.bSuccess = True when Update successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("UpdateCreditLimit",  
"SessionID", New Object() {0,12345,5000.00,False})
```

108. Function: UpdatePostingStatus

This function will update the guest posting status.

psFunction="UpdatePostingStatus", below is the list of psParam or poParam

Parameter	Type	Description	Required
peSearchType	Enum	InternalID = 0 'res_acc PGID = 1 'res_pgid BoardCard = 2 'res_boardcc PaxID = 3 'res_referenz	✓
psSearchStr	String	Unique Payer Account ID or Board Card or PGID or Pax ID depends on the peSearchType	✓
pnStatus	Byte	0 – Posting disable 1 - Posting Enable 2 – Posting disable but manual posting allow	✓
psReason	String(900)	The reason to change the status	✓

Return Value

CResponseXml.bSuccess = False when Update failed.

CResponseXml.bSuccess = True when Update successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("UpdatePostingStatus",  
"SessionID", New Object() {0,12345,0,"Credit Limit Exceeded"})
```

109. Function: GETRFIDEncodingData

This function will retrieve the Ving door lock info and charge card info from SPMS.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="GetRFIDEncodingData", below is the list of psParam or poParam

Parameter	Type	Description	Required
peSearchType	Enum	InternalID = 0 'res_acc PGID = 1 'res_pgid BoardCard = 2 'res_boardcc PaxID = 3 'res_referenz	✓
psSearchStr	String	Unique Payer Account ID or Board Card or PGID or Pax ID depends on the peSearchType	✓
psRFIDUID	String(16)	Convert the value to HEX	✓

Return Value

CResponseXml.bSuccess = False when failed.

CResponseXml.bSuccess = True when successful. CResponse.oDataset will have 1 DataTables

for example,

```
oResponse = goWS.FidelioSPMSWSXML("GetRFIDEncodingData",
"SessionID", New Object() {0,12345,"E01581A07C123B"})
```

ADO.NET DataTable field structure for data table.

Code	Type	Description
TRACK1	String(76)	Track 1 – Custom Info
TRACK2	String(37)	Track 2 –SPMS Charge Card info
TRACK2_BIN	Byte(7)	Numeric Track 2 In Binary Format (Excluding Expiry)
TRACK3	String(200)	Track 3 - Ving encoding string format
ENCODED	Boolean	True=Previously Encoded, False>New RFID
ACCID	Integer	Unique Guest ID

110. Function: UpdateRFIDEncoded

This function will mark the RFID as encoded successfully.

The GETRFIDEncodingData->ENCODED field will return 1 when this function is call and successfully executed.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="UpdateRFIDEncoded", below is the list of psParam or poParam

Parameter	Type	Description	Required
psRFIDUID	String(16)	Convert the value to HEX	✓

Return Value

CResponseXml.bSuccess = False when Update failed.

CResponseXml.bSuccess = True when Update successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("UpdateRFIDEncoded",
"SessionID", New Object() {"E01581A07C123B"})
```

111. Function: RegisterRfidBoardCard

This function associates a RFID board card to a guest for the purpose of door key encoding at door lock with the Visionline system. This feature is applicable for cards externally encoded before embarkation day. Door key encoding will happen at the door lock only when the guest has checked in and the card is used at the lock.

The guest to be registered must have an expected reservation. Guests that are checked-in, checked-out or with a cancelled reservation will be rejected. Also, guests already issued with a door-key encoded board card will be rejected as well.

In the event that the card already belonged to another person, the function will also reject the registration. The only time such card can be re-registered under the new person is when the card has not been encoded with door key and the person is not currently checked-in.

When registration is successful, it will override the previously registered board card for the guest.

Above checking is not applicable when connected to offline QCI Sync DB.

psFunction="RegisterRfidBoardCard", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Long	Unique Payer Account ID	✓
psUID	String	UID of The RFID Board Card	✓

Return Value

CResponseXml.bSuccess = False when Update failed.

CResponseXml.bSuccess = True when Update successful.

This function supports enhanced error messaging:

CResponseXml.sErrorMsg: detailed long description of the error

CResponseXml.sErrWord: short brief description of error title

CResponseXml.sErrCode: 6-CHAR or less error code.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("RegisterRfidBoardCard",
"SessionID", New Object() {12345,"CD125E84"})
```

113. Function: GetLuggageInfo

This function will get the luggage movement of the guest.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="GetLuggageInfo", below is the list of psParam or poParam

Parameter	Type	Description	Required
peSearchType	Enum	InternalID = 0 'res_acc PGID = 1 'res_pgid BoardCard = 2 'res_boardcc PaxID = 3 'res_referenz Cabin = 4 'res_cab	✓
psSearchStr	String	Unique Payer Account ID or Board Card or PGID or Pax ID depends on the peSearchType	✓
peSearchLevel	Enum(Byte)	0 – By Passenger 1 – By Cabin 2 – By Booking No	✓
peSearchStatus	Enum(Byte)	0 – All Location (All Status) 1 – Latest Location (Current Status)	✓

Return Value

CResponseXml.bSuccess = False when nothing is found or invalid input parameters.

CResponseXml.bSuccess = True when successful. CResponse.oDataset will have 1 DataTables

The Data Tables will be different depend on peSearchStatus input parameter

for example,

```
oResponse = goWS.FidelioSPMSWSXML("GetLuggageInfo", "SessionID",  
New Object() {0,12345,0,1})
```

ADO.NET DataTable field structure for data table for peSearchStatus = 0

Code	Type	Description
LUG_ACC_ID	Integer	Unique Account ID
UXP_A_FSTN	String(40)	Guest First Name
UXP_A_NAME	String(40)	Guest Last Name

Code	Type	Description
LUM_RFID	String(20)	RFID Tag
LUM_ZONE	String(20)	Zone ID
LUM_TYPE	String(20)	RFID Type – as send from Strategic
PAIRING_TIME	Date	The time the tag is associated to the guest
LUM_MOVEMENT	Date	The scan time of the tag
TIME_REMAINING	Integer	Number of minutes before delivery to room/pier (From the last movement time)
LUZ_LOCATION	String(50)	Actual Location
DIRECTION	String(8)	Inbound or Outbound
GUEST_LOCATION	String(50)	Guest Friendly Location Description
DELIVERED	Integer	1-Delivery to guest room, 0-Not yet delivery
QUARANTINE	Integer	Y-In quarantine zone, N-In normal zone
PERCENT_COMPLETE	Double	Percentage complete for delivery

ADO.NET DataTable field structure for data table for peSearchStatus = 1

Code	Type	Description
LUG_ACC_ID	Integer	Unique Account ID
UXP_A_FSTN	String(40)	Guest First Name
UXP_A_NAME	String(40)	Guest Last Name
LUM_RFID	String(20)	RFID Tag
LUM_ZONE	String(20)	Zone ID
LUM_TYPE	String(20)	RFID Type – as send from Strategic
PAIRING_TIME	Date	The time the tag is associated to the guest
FIRSTSCAN_TIME	Date	The time the tag first scan, for example, on X-Ray machine
LUM_MOVEMENT	Date	Last movement time of the bag
DELIVERY_TIME	Date	Expected delivery time
TIME_REMAINING	Integer	Number of minutes before delivery to room/pier from current time
LUZ_LOCATION	String(50)	Actual Location
DIRECTION	String(8)	Inbound or Outbound
GUEST_LOCATION	String(50)	Guest Friendly Location Description
DELIVERED	Integer	1-Delivery to guest room, 0-Not yet delivery
QUARANTINE	Integer	Y-In quarantine zone, N-In normal zone

Code	Type	Description
PERCENT_COMPLETE	Double	Percentage complete for delivery

114. Function: UpdateLuggageLink

This function will link the luggage to the guest, if the luggage already linked to a different guest, it will overwrite it.

psFunction="UpdateRFIDEncoded", below is the list of psParam or poParam

Parameter	Type	Description	Required
psSearchStr	String	Unique Payer Account ID or Board Card or PGID or Pax ID depends on the peSearchType	✓
psRFIDUID	String(16)	Convert the value to HEX	✓
peSearchType	Enum	InternalID = 0 'res_acc PGID = 1 'res_pgid BoardCard = 2 'res_boardcc PaxID = 3 'res_referenz Cabin = 4 'res_cab Default value = InternalID	optional

Return Value

CResponseXml.bSuccess = False when Update failed.

CResponseXml.bSuccess = True when Update successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("UpdateLuggageLink",
"SessionID", New Object() {12345, "E01581A07C123B"})
```

115. Function: DeleteLuggageLink

This function will remove the luggage link for the guest

psFunction="UpdateRFIDEncoded", below is the list of psParam or poParam

Parameter	Type	Description	Required
psRFIDUID	String(16)	Convert the value to HEX	✓

Return Value

CResponseXml.bSuccess = False when Update failed.

CResponseXml.bSuccess = True when Update successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("DeleteLuggageLink",
"SessionID", New Object() {"E01581A07C123B"})
```

117. Function: RegisterRfidBoardCardQuery

This function queries SPMS on the passed in UID before “RegisterRfidBoardCard” is called to make sure “RegisterRfidBoardCard” will be successful.

Note: Not supported when connecting to offline QCI Sync DB

psFunction=“RegisterRfidBoardCardQuery”, below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Long	Unique Payer Account ID	✓
psUID	String	UID of The RFID Board Card	✓

Return Value

CResponseXml.bSuccess = False when Update failed.

CResponseXml.bSuccess = True when Update successful.

This function supports enhanced error messaging:

CResponseXml.sErrorMsg: detailed long description of the error

CResponseXml.sErrWord: short brief description of error title

CResponseXml.sErrCode: 6-CHAR error code. (can be less than 6-char)

for example,

```
oResponse = goWS.FidelioSPMSWSXML("RegisterRfidBoardCardQuery",
"SessionID", New Object() {12345,"CD125E84"})
```

118. Function: DeactivateCreditCard

This function will deactivate the credit card for the guest

psFunction="DeactivateCreditCard", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnCrdID	Integer	Unique Credit Card ID	optional
pnAccID	Integer	Unique Account ID	optional

Either pnCrdID or pnAccID must be pass in a valid value

pnCrdID > 0 mean deactivate single credit card record

pnAccID > 0 mean deactivate all credit card belong to the guest

if both pnCrdID > 0 and pnAccID > 0, we will deactivate single credit card record base on pnCrdID

Return Value

CResponseXml.bSuccess = False when Update failed.

CResponseXml.bSuccess = True when Update successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("DeactivateCreditCard",
"SessionID", New Object() {12345,0})
```

119. Function: MarkAsNoShow

This function will mark expected guest as no show

psFunction="MarkAsNoShow", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	Unique Account ID	✓

Return Value

CResponseXml.bSuccess = False when Update failed.
CResponseXml.bSuccess = True when Update successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML ("MarkAsNoShow", "SessionID", New  
Object () {12345})
```

121. Function: FCUIPayment

This web method function will post the payment to the SPMS account base on the input parameter, this is mainly for generic usage, this is compatible with FCUI Payment.

Note: Not supported when connecting to offline QCI Sync DB

Parameter	Type	Description	Required
psSearchStr	String	Search String	✓
peSearchType	Integer	Search String type	✓
peAccountStatus	Integer	Account Status	✓
peAccountType	Integer	Account Type	✓
pbIncludePicture	Boolean	Include Guest Picture in Return Result	✓
psUniquePostingID	String(20)	Unique Posting ID	✓
psOutletID	String(13)	Outlet ID	✓
pnValue	Decimal	Posting Total	✓
psNote	String	Notes	✓
pnInvoiceWin	Integer	Invoice Windows (0 – 3)	✓

The following is a description of the parameters.

psSearchStr

Entered by the external system operator (manually or through a magnetic card reader) and generally contains any information necessary to identify the account. The field can be an account number, card number, cabin number or person name.

peSearchType

The field identifies the type of entry in the Account ID field. The following Account ID Entry Types are defined:

- 0 → Card identification number (RES_BOARDCC)
- 1 → Cabin number or System account (RES_CAB/UXP_A_SYS_ACC)
- 2 → Name of a person or company account(UXP_A_NAME_N)
- 3 → Internal identification number (UXP_A_ID)
- 4 → Group Id number (RES_GRP)
- 5 → External identification number (RES_BOOKNR)
- 6 → Phone trunk number (CAB_TEL or CAB_TEL2)
- 7 → e-mail Id (UXP_H_EMAIL or RES_EMAIL_SHIP)
- 8 → Internal Id number(UXP_C_INTERNALID)
- 9 → Guest Category(GCT_CODE)

-
- 10 → RFID UID (RFID_ID)
 - 11 → Loyalty Number (UXP_A_FRQ_CARDNO)
 - 12 → Manning Number/Safety Number
 - 13 → Pre generated Random Number (RES_PGID)

peAccountStatus

The field identifies the account current reservation status. The following status values were defined:

- 0 → Reservations
- 1 → Checked-In
- 2 → Active (Reservations and Checked-in)
- 3 → Disembarked
- 4 → Disembarked Residents (Owners – Valid only for ResidenSea)
- 5 → Checked-In and all Reservation for the current cruise

peAccountType

The field identifies the account type. The following account types are defined:

If this field is ignored or blank then it will return all type.

- 0 → All
- 1 → Passenger (Guest)
- 2 → Resident (Guest)
- 3 → Crew member
- 4 → Group
- 5 → Visitor
- 6 → System account
- 7 → Staff
- 8 → Gift Card

pbIncludePicture

To include guest pictures in the return result, true will cause the query to take a longer time to return and expect a huge amount of data to be return.

psUniquePostingID

The field identifies the bill (check) uniquely within the whole external system. The field is used as a cross-reference to obtain detailed information about all the transactions recorded on a check.

psOutletID

The field identifies the revenue center of the outlet from which the charge originated. The FCSPMS description equivalent of the Outlet ID will be displayed or printed on a customer invoice.

pnValue

The field identifies the payment amount, for forex, this is the forex amount receive.

psNote

The field identifies the additional information sent by 3rd party system.

pnInvoiceWin

The invoice windows, a valid value is from 0 to 3, any invalid value will default to 0

Return Value

CResponseXml.oObj(0) Returns 0 when update is successful

CResponseXml.oObj(0) Returns 1 when update has failed

CResponseXml.oObj(0) Returns 2 when the search string return more than 1 persons, it is recommend to use Unique Account ID to make sure it is unique.

122. Function: UpdateGuestMessage

This function will add or update the guest message.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="UpdateGuestMessage", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnMsgD	Integer	Unique Message ID(0 for add new record)	✓
pnAccID	Integer	Unique Account ID	✓
psSender	String(50)	Sender	✓
psMessage	String(1000)	Message to the guest	✓
peDeliveryMode	Enum	0-NoDelivery 1-DeliverAtAdvanceQCIWizard 2-DeliverAtGangway	✓
peAcknowledgement	Enum	0-NoAcknowledge 1-UserAcknowledgeWithLog 2-ManagerAcknowledgeWithLog 3-DoNotContinue (8.0 only)	✓
peType (8.0 only)	Enum	0-Standard 1-Priority 2-Silent	✓
pdStartDate (8.0 only)	Integer	Nothing=Always Active	✓
pdExpiry (8.0 only)	Date	Nothing=Always Active	✓

Return Value

CResponseXml.bSuccess = False when Update/Add failed.

CResponseXml.bSuccess = True when Update/Add successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("UpdateGuestMessage",
"SessionID", New Object() {12345,1234576,"Micheal","Guest Had
pacel in front desk",2,1, 0,DateTime.SpecifyKind(#01-01-2014
3:00:00 pm#, DateTimeKind.Unspecified), DateTime.SpecifyKind(#06-
01-2014 3:00:00 pm#, DateTimeKind.Unspecified)})
```

123. Function: DeleteGuestMessage

This function will delete the guest message.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="DeleteGuestMessage", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnMsgID	Integer	Unique Message ID	✓

Return Value

CResponseXml.bSuccess = False when Delete failed.

CResponseXml.bSuccess = True when Delete successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("DeleteGuestMessage",
"SessionID", New Object() {12345})
```

131. Function: ActivateCreditCard

This function will deactivate the credit card for the guest.

psFunction="DeactivateCreditCard", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnCrdID	Integer	Unique Credit Card ID	✓
pbAssignInvoice1	Boolean	Assign the Credit Card to Invoice 1	✓
pbAssignInvoice2	Boolean	Assign the Credit Card to Invoice 2	✓
pbAssignInvoice3	Boolean	Assign the Credit Card to Invoice 3	✓
pbAssignInvoice4	Boolean	Assign the Credit Card to Invoice 4	✓

Return Value

CResponseXml.bSuccess = False when Update failed.

CResponseXml.bSuccess = True when Update successful.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("ActivateCreditCard",
"SessionID", New Object() {12345, True, True, True})
```

132. Function: UpdateCrewPinCode

This function will update crew pin code.

psFunction="UpdateCrewPinCode", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	Unique Crew Account ID	✓
pnNewPinCode	Integer	New pincode	✓

for example,

```
oResponse = goWS.FidelioSPMSWSXML("UpdateCrewPinCode",
"SessionID", New Object() {12345, 1234})
```

Return Value

CResponseXml.bSuccess = False when Update failed.

CResponseXml.bSuccess = True when Update successful.

133. Function: ValidateCrewPinCode

This function will validate crew pin code to see if it matches with the existing one

psFunction="ValidateCrewPinCode", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	Unique Crew Account ID	✓
pnPinCode	Integer	New pin code	✓

for example,

```
oResponse = goWS.FidelioSPMSWSXML("UpdateCrewPinCode",
"SessionID", New Object() {12345, 1234})
```

Return Value

CResponseXml.bSuccess = False when Update failed.

CResponseXml.bSuccess = True when Update successful.

134. Function: GetPreviousClockInOutActivities

This function will get the previous days' clock-in/out transactions

psFunction="GetPreviousClockInOutActivities", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	Unique Crew Account ID	✓
pnDays	Integer	Optional. The number of previous days to get. If 0 then will default to days defined in parameter 'Display Previous X Days Clock-In/Out at terminal'	

for example,

```
oResponse =
goWS.FidelioSPMSWSXML("GetPreviousClockInOutActivities",
"SessionID", New Object() {12345, 0})
```

Return Value

CResponseXml.bSuccess = False when Update failed.

CResponseXml.bSuccess = True when Update successful, CResponse.oDataset will have 1 DataTable.

ADO.NET DataTable field structure for data table ("TCLK")

Code	Type	Description
TCLK_DATETIMESTAMP	Date	Date time stamp of the clock-in/out transaction
TCLK_IN_OUT	String	'I' for clock-in, 'O' for clock-out
TCLK_ENTRYTYPE	String	'A' for auto, 'M' for manual
TARS_CODE	String	Task work code
TARS_NAME	String	Task work name

135. Function: ClockInOutGetStatus

This function will get the last clock-in/out transaction of the crew

psFunction="ClockInOutGetStatus", below is the list of psParam or poParam

Parameter	Type	Description	Required
psBoardCardNo	String	Crew boardcard number (RES_BOARDCC) Either psBoardCardNo or pnAccID is required.	
pnAccID	Integer	Unique Crew Account ID. Either psBoardCardNo or pnAccID is required.	

for example,

```
oResponse = goWS.FidelioSPMSWSXML("ClockInOutGetStatus",
"SessionID", New Object() {"12345", 0})
```

Return Value

CResponseXml.bSuccess = False when Update failed.

CResponseXml.bSuccess = True when Update successful, CResponse.oDataset will have 1 DataTable.

ADO.NET DataTable field structure for data table ("CLOCKINOUT_STATUS")

Code	Type	Description
TARS_ID	Integer	Unique task work code ID
TARS_CODE	String	Task work code
TARS_NAME	String	Task work name
TCLK_DATETIMESTAMP	Date	Clock-in/out datetime stamp
TCLK_IN_OUT	String	'I' for clock-in, 'O' for clock-out
CRW_NAME	String	Last Name
CRW_FSTN	String	First Name
CRW_DIV	String	Department
CRW_STAFF_POS	String	Position
RES_CAB	String	Cabin Number

136. Function: ApproveCrewWorkedHoursDaily

This function will approve the crew worked hours for a specified date

psFunction="ApproveCrewWorkedHoursDaily", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	Unique Crew Account ID.	✓
pdDayToApprove	Date	Date of the worked hours to be approved	✓

for example,

```
oResponse = goWS.FidelioSPMSWSXML ("ApproveCrewWorkedHoursDaily",
"SessionID", New Object () {12345,
DateTime.SpecifyKind(DEFAULT_DATE, DateTimeKind.Unspecified)})
```

Return Value

CResponseXml.bSuccess = False when Update failed.

CResponseXml.bSuccess = True when Update successful

137. Function: ClockInMobile

This function will allow a clock-in transaction

psFunction="ClockInMobile", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	Unique Crew Account ID.	✓
pnWorkCodeId	Integer	Task Work Code ID. TARS_ID	✓

for example,

```
oResponse = goWS.FidelioSPMSWSXML ("ApproveCrewWorkedHours",
"SessionID", New Object() {12345, 2})
```

Return Value

CResponseXml.bSuccess = False when Update failed.

CResponseXml.bSuccess = True when Update successful

138. Function: ClockOutMobile

This function will allow a clock-out transaction

psFunction="ClockOutMobile", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	Unique Crew Account ID.	✓
pnWorkCodeId	Integer	Task Work Code ID. TARS_ID Optional, if 0 then will use the last clock-in task work code id	

for example,

```
oResponse = goWS.FidelioSPMSWSXML ("ApproveCrewWorkedHours",
"SessionID", New Object () {12345, 0})
```

Return Value

CResponseXml.bSuccess = False when Update failed.

CResponseXml.bSuccess = True when Update successful

139. Function: GetILOViolations

This function will get all the ILO violations on a specified date for a crew

psFunction="GetILOViolations", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	Unique Crew Account ID. Either psBoardCardNo or pnAccID is required.	✓
pdDayRequested	Date	Date of the ILO Violations	✓

for example,

```
oResponse = goWS.FidelioSPMSWSXML("GetILOViolations", "SessionID",  
New Object() {12345, DateTime.SpecifyKind(DEFAULT_DATE,  
DateTimeKind.Unspecified)})
```

Return Value

CResponseXml.bSuccess = False when Update failed.

CResponseXml.bSuccess = True when Update successful, CResponse.oDataset will have 1 DataTable.

ADO.NET DataTable field structure for data table ("TALG")

Code	Type	Description
TALG_ID	Integer	Unique ID of the record
TALG_TCLK_ID	Integer	Unique ID of the TCLK record. Linked to TCLK.TCLK_ID
TALG_MODDATE	Date	Last modified date
TALG_ILO_NOTES	String	ILO Violation Notes
TALG_MGR_NOTES	String	Manager approval notes
TALG_ILO_7DAYS	Integer	1=violation for ILO for 7 days (exceeded max worked hours for the last 7 days)
TALG_ILO_24HRS	Integer	1=violation for ILO 24hrs (exceeded max worked hours for the last 24hrs)
TALG_ILO_MINRESTBLOCK	Integer	1=violation for ILO minimum rest hr block
TALG_ILO_MINREST_7DAYS	Integer	1=violation for ILO minimum rest hours in 7 days
TALG_ILO_MINREST_24HRS	Integer	1=violation for ILO minimum rest hours for the last 24hrs

142. Function: GetTreatmentGroupsForLocation

This function is used to request all Treatment Groups assigned to each Location from the SPMS.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="GetTreatmentGroupsForLocation", below is the list of psParam or poParam

Code	Type	Description	Required
psSPATreatmentGroups	String	All Default Treatment Groups assigned to a Location, separated by commas	✓

The following is a description of the parameters.

psSPATreatmentGroups

All Default Treatment Groups assigned to a Location, separated by commas as returned by WSF function GetSPALocation in field spl_treatment_groups.

Return Value

CResponseXml.bSuccess = False when input values are invalid or no record found.

CResponseXml.bSuccess = True and CResponseXML.oTables(0) = ADO.NET *data table* when input values are valid.

ADO.NET DataTable field struture

Code	Type	Description
typ_art	String	Treatment Group Code
typ_comment	String	Treatment Group Description

typ_art

The field returns the Treatment Group Code.

typ_comment

The field returns the Treatment Group Description.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("GetTreatmentGroupsForLocation",
"SESSIONID", New Object() {"BODY", "FACE", })
```

145. Function: SearchCntrAssgn

This function searches for crew members having contract assignment with various search criteria from the SPMS.

psFunction="SearchCntrAssgn", below is the ordered list of input parameters and its descriptions.

Parameter	Type	Description	Required
MemoryLifeSpan	Integer	Value in seconds, default is zero. If set to non-zero, result set will be kept in memory for reuse when a subsequent call is issued within the specified time interval with MemoryReuse = TRUE.	optional
MemoryReuse	Boolean	Optional, default is FALSE. When set to TRUE, the search will not query DB but instead just return records from the previous result set.	optional
RecordPerPage	Integer	Optional, default is zero. Specify the number of unique person records for which their contracts will be returned. If zero, it will return all records in the result set.	optional
PageNum	Integer	Optional, default is zero for page 1. Specify the page to return in a multi-page result set.	optional
UXP_A_IDs	String	Optional. Comma delimited UXP_A_ID.	optional
SearchStr	String	Optional. If specified, will be used to search based on following fields. The order of following also determines the sequence in which the search is carried out until a match is received. <ul style="list-style-type: none">- RES_BOARDCC (exact match),- RES_CC_NUMBER (exact match),- RES_CAB (exact match),- UXP_A_NAME_N (partial match), and- UXP_C_EXTERNALID or UXP_C_INTERNALID (exact match) depending on PAR <i>"Display UXP_C_EXTERNALID As Crew ID".</i>	optional
ORDER_BY	String	Optional. Only supports UXP, RES and CTR column ordering.	optional

Parameter	Type	Description	Required
RES_STATUSs	String	Optional. Comma delimited RES_STATUS. *	optional
EMB_DATE_01	Date	Optional. EMB_DATE_01 and EMB_DATE_02 specify the date range of NVL(res_emb_a,res_emb_e). Or CTR_BEG_DATE if NOB.	optional
EMB_DATE_02	Date	Optional. EMB_DATE_01 and/or EMB_DATE_02 specify the date range of NVL(res_emb_a,res_emb_e). Or CTR_BEG_DATE if NOB.	optional
DEB_DATE_01	Date	Optional. DEB_DATE_01 and/or DEB_DATE_02 specify the date range of NVL(res_dis_a,res_dis_e). Or CTR_END_DATE if NOB.	optional
DEB_DATE_02	Date	Optional. DEB_DATE_01 and/or DEB_DATE_02 specify the date range of NVL(res_dis_a,res_dis_e). Or CTR_END_DATE if NOB.	optional
CTR_STATUSs	String	Optional. Comma delimited CTR_STATUS. *	optional
SGR_IDs	String	Optional. Comma delimited SGR_ID.	optional
CTR_TYP_CTRs	String	Optional. Comma delimited CTR_TYP_CTR.	optional
CTR_NOB_FLAG	String	Optional. "1" for NOB assignments. "0" for normal assignments.	optional
CTR_PCY_IDS	String	Optional. Comma delimited CTR_PCY_ID.	optional
CTR_XCET_IDS	String	Optional. Comma delimited CTR_XCET_ID.	optional
UXP_H_NATIONS	String	Optional. Comma delimited UXP_H_NATION.	optional
ENDING_PYRL	Boolean	Optional. If TRUE, will return assignment with pending final month payroll.	optional

Return Value

- CResponseXml.bSuccess = False when WS function did not execute successfully.
Eg. due to invalid input parameters.
- CResponseXml.bSuccess = True when WS function executed successfully, along with
 - o CResponseXML.oDataSet = Nothing, when no record is found. Otherwise,

-
- CResponseXML.oDataSet = ADO.NET *dataset*, which will contain table ACC (UXP/RES), CTR, SPD, COH, PCY, SED, SPO and XCET. *
 - CResponseXML.nTotalPage = total number of pages in the resultset, when input parameter *RecordPerPage* is specified.

Remark:

* Please refer to SPMS Data Dictionary for details of the fields.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("SearchCntrAssgn", "SessionID",
New Object() {60, True, 10, 1, "", "123", "UXP_C_EXTERNALID",
"RR,RE,RX,RN,CC,CL,DD", _
"", "", "", "", "A,C", "", "", "", "0", "", "", "", False})
```

146. Function: SearchPayrolls

This function returns payroll data based on various search criteria from the SPMS.

psFunction="SearchPayrolls", below is the ordered list of input parameters and its descriptions.

Parameter	Type	Description	Required
MemoryLifeSpan	Integer	Value in seconds, default is zero. If set to non-zero, result set will be kept in memory for reuse when a subsequent call is issued within the specified time interval with MemoryReuse = TRUE.	optional
MemoryReuse	Boolean	Optional, default is FALSE. When set to TRUE, the search will not query DB but instead just return records from the previous result set.	optional
RecordPerPage	Integer	Optional, default is zero. Specify the number of CTR records for which their payroll data will be returned. If zero, it will return all CTR records in the resultset.	optional
PageNum	Integer	Optional, default is zero for page 1. Specify the page to return in a multi-page result set.	optional
CTR_IDs	String	Optional. Comma delimited CTR_ID.	optional
SPP_STATUSs	String	Optional. Comma delimited SPP_STATUS. *	optional
SSH_STATUSs	String	Optional. Comma delimited SSH_STATUS. *	optional

Return Value

- CResponseXml.bSuccess = False when WS function did not execute successfully. Eg. due to invalid input parameters.
- CResponseXml.bSuccess = True when WS function executed successfully, along with
 - o CResponseXML.oDataSet = Nothing, when no record is found. Otherwise,
 - o CResponseXML.oDataSet = ADO.NET dataset, which will contain table SSH, PAY, SPP, SED, BEN and USR. *
 - o CResponseXML.nTotalPage = total number of pages in the resultset, when input parameter *RecordPerPage* is specified.

Remark:

* Please refer to SPMS Data Dictionary for details of the fields.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("SearchPayrolls", "SessionID",
New Object() {60, True, 10, 1, 46598,46599,46600, "O,A,C,F",
"A,P"})
```

147. Function: QueryCrewInvoice

This function returns crewmember's invoice info along with info about his/her available payroll credit for folio deduction.

psFunction="QueryCrewInvoice", below is the ordered list of input parameters and its descriptions.

Parameter	Type	Description	Required
UXP_A_ID	Integer	Required input. Unique identifier of UXP record - UXP_A_ID.	✓
BTD	String	Required input. Balance-to-date specifier. If TRUE, will return up-to-date payroll balance available for folio deduction. If FALSE, it will return total payroll end-balance supposedly available at the end of the month.	✓

Return Value

- CResponseXml.bSuccess = False when WS function did not execute successfully.
Eg. due to invalid input parameters.
- CResponseXml.bSuccess = True when WS function executed successfully, and
 - o CResponseXML.oDataSet = *ADO.NET dataset*. The dataset will contain table SSH and SPP of the payroll to be used for folio deduction. *
 - o CResponseXML.oCrewInvoice(0) = info about available payroll credit for folio deduction.
 - Amount = uxp_a_pos_debit - uxp_a_pos_credit, total invoice amount in onboard currency
 - AmountPayable = invoice amount, in wage currency, that can be settled via folio deduction
 - Currency = onboard currency
 - AvailPay = available payroll amount or credit
 - WageCurrency = CTR_WAGE_CUR_TYP *
 - CurrencyConvRate = onboard to wage currency conversion rate

Remark:

* Please refer to SPMS Data Dictionary for details of the fields.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("QueryCrewInvoice", "SessionID",  
New Object() {12345, True})
```

148. Function: PayCrewInvoice

This function provides a mean for folio deduction searches for payrolls with various criteria from the SPMS.

psFunction="PayCrewInvoice", below is the ordered list of input parameters and its descriptions.

Parameter	Type	Description	Required
UXP_A_ID	Integer	Required input. Unique identifier of UXP record - UXP_A_ID.	✓
BTD	String	Required input. Balance-to-date specifier. If TRUE, folio deduction will be based on up-to-date payroll balance. If FALSE, folio deduction will be based on total payroll end-balance supposedly available at the end of the month.	✓
AmountPayable	Decimal	Required input. The amount of folio deduction.	✓
Currency	String	Required input. Currency sign. Can use the currency sign return from previous "QueryCrewInvoice" function call.	✓

Return Value

- CResponseXml.bSuccess = False when WS function did not execute successfully.
Eg. due to invalid input parameters.
- CResponseXml.bSuccess = True when WS function executed successfully, and
 - o CResponseXML.oDataSet = ADO.NET dataset. The dataset will contain table SSH and SPP of the payroll used in folio deduction. *

Remark:

* Please refer to SPMS Data Dictionary for details of the fields.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("PayCrewInvoice", "SessionID",
New Object() {12345, True, 250.00, "USD"})
```

150. Function: CheckSag

This function will allow the client to check for custom Gangway alert info.

psFunction="CheckSag", below is the list of psParam or poParam

Parameter	Type	Description	Required
pnAccID	Integer	Unique Account ID	✓
pbShoreToShip	Boolean	True-From Shore to Ship, False from Ship to Shore	✓

Return Value

CResponseXml.bSuccess = Always return True

CResponseXML.oObj(0)

- 0-Allow Pass
- 1-Allow Overwrite
- 2-Denied Pass

CResponseXML.oObj(1)

Message to show the guest

for example,

```
oResponse = goWS.FidelioSPMSWSXML("CheckSag", "SessionID", New  
Object() {12345, True})
```

151. Function: GetSeatingZoneAvailability

This function is used to request all available Seats for given Event, Layout Level and Seating Zone from the SPMS.

Note: Not supported when connecting to offline QCI Sync DB

psFunction="GetSeatingZoneAvailability", below is the list of psParam or poParam

Code	Type	Description	Required
pnEvtID	Integer	Event ID	✓
EvtLayoutLevelID	Integer	Layout Level ID	✓
EvtSeatingZoneID	Integer	Seating Zone ID	✓

The following is a description of the parameters.

pnEvtID

The field identifies the unique event identification number. This ID can be obtained through GetEvent WebMethod. The field is an internal, unique event number.

EvtLayoutLevelID

The field identifies the unique Layout Level identification number. This ID can be obtained through GetEvent WebMethod. The field is an internal, unique layout level number.

EvtSeatingZoneID

The field identifies the unique Seating Zone identification number. This ID can be obtained through GetEvent WebMethod. The field is an internal, unique seating zone number.

Return Value

CResponseXml.bSuccess = False when input values are invalid or no record found.

CResponseXml.bSuccess = True and CResponseXML.oTables(0) = ADO.NET *data table* when input values are valid.

ADO.NET DataTable field struture

Code	Type	Description
tksd_id	Integer	Unique ID of the record
tksd_code	String(20)	Seat ID

tksd_id

The field returns the unique ID for each Seat.

tksd_code

The field returns the Seat ID.

for example,

```
oResponse = goWS.FidelioSPMSWSXML("GetSeatingZoneAvailability",
"SESSIONID", New Object() {62, 82, 24})
```

152. Function: GangwayGuestSearch

This function is used to search the guest for Gangway movement.

psFunction="GangwayGuestSearch", below is the list of psParam or poParam

Code	Type	Description	Required
pbAshore	Boolean	True=Guest at shoreside, False=Guest Onboard	✓
peGuestType	Integer	0-All 1-Guest Only 2-Resident Only 3-Crew Only 4-Visitor Only 5-Check-Out but onboard	✓
pbShowCurrentPortOnly	Boolean	For ferry operator only, true=only return guest which disembark at the current port only	✓
pnExcludeOvernightTour	Boolean	True=Exclude guest stay at Shoreside for overnight tour	✓

Return Value

CResponseXml.bSuccess = False when input values are invalid or no record found.

CResponseXml.bSuccess = True and CResponseXML.oTables(0) = *ADO.NET data table* when input values are valid.

ADO.NET DataTable field structure

Code	Type	Description
Res_status	String	Reservation Status
Tname	String	Guest Name
Res_cab	String	Cabin Number
Res_owner	Integer	0-Normal Guest, 1-Owner
Nationality	String	Nationality Code
Res_id	Integer	Unique Reservation ID
Res_emb_a	Date	Actual Embarkation Date
Res_signonport	String	Port where the guest embark
Res_dis_e	Date	Expected Disembarkation Date

Code	Type	Description
Res_signoffport	String	Port where the guest disembark
Uxp_a_name	String	Last Name
Uxp_a_fstn	String	First Name
Uxp_a_as_crw	Integer	Guest show in crew manifest
Uxp_c_as_pax	Integer	Crew show in pax manifest
Res_acc	Integer	Unique Guest ID
SwitchAcc	Integer	1-Switch Manifest
ManingNumber	String	Crew Safety No

for example,

```
oResponse = goWS.FidelioSPMSWSXML("GangwayGuestSearch",
"SESSIONID", New Object() {False, 0, False, False})
```