

Oracle® Retail Merchandising

Batch Schedule

Release 13.0.1

June 2008

Copyright © 2008, Oracle. All rights reserved.

Primary Author: Rich Olson

The Programs (which include both the software and documentation) contain proprietary information; they are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright, patent, and other intellectual and industrial property laws. Reverse engineering, disassembly, or decompilation of the Programs, except to the extent required to obtain interoperability with other independently created software or as specified by law, is prohibited.

The information contained in this document is subject to change without notice. If you find any problems in the documentation, please report them to us in writing. This document is not warranted to be error-free. Except as may be expressly permitted in your license agreement for these Programs, no part of these Programs may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose.

If the Programs are delivered to the United States Government or anyone licensing or using the Programs on behalf of the United States Government, the following notice is applicable:

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the Programs, including documentation and technical data, shall be subject to the licensing restrictions set forth in the applicable Oracle license agreement, and, to the extent applicable, the additional rights set forth in FAR 52.227-19, Commercial Computer Software—Restricted Rights (June 1987). Oracle Corporation, 500 Oracle Parkway, Redwood City, CA 94065

The Programs are not intended for use in any nuclear, aviation, mass transit, medical, or other inherently dangerous applications. It shall be the licensee's responsibility to take all appropriate fail-safe, backup, redundancy and other measures to ensure the safe use of such applications if the Programs are used for such purposes, and we disclaim liability for any damages caused by such use of the Programs.

Oracle, JD Edwards, PeopleSoft, and Siebel are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

The Programs may provide links to Web sites and access to content, products, and services from third parties. Oracle is not responsible for the availability of, or any content provided on, third-party Web sites. You bear all risks associated with the use of such content. If you choose to purchase any products or services from a third party, the relationship is directly between you and the third party. Oracle is not responsible for: (a) the quality of third-party products or services; or (b) fulfilling any of the terms of the agreement with the third party, including delivery of products or services and warranty obligations related to purchased products or services. Oracle is not responsible for any loss or damage of any sort that you may incur from dealing with any third party.

Value-Added Reseller (VAR) Language

- (i) the software component known as **ACUMATE** developed and licensed by Lucent Technologies Inc. of Murray Hill, New Jersey, to Oracle and imbedded in the Oracle Retail Predictive Application Server – Enterprise Engine, Oracle Retail Category Management, Oracle Retail Item Planning, Oracle Retail Merchandise Financial Planning, Oracle Retail Advanced Inventory Planning and Oracle Retail Demand Forecasting applications.
- (ii) the **MicroStrategy** Components developed and licensed by MicroStrategy Services Corporation (MicroStrategy) of McLean, Virginia to Oracle and imbedded in the MicroStrategy for Oracle Retail Data Warehouse and MicroStrategy for Oracle Retail Planning & Optimization applications.
- (iii) the **SeeBeyond** component developed and licensed by Sun Microsystems, Inc. (Sun) of Santa Clara, California, to Oracle and imbedded in the Oracle Retail Integration Bus application.
- (iv) the **Wavelink** component developed and licensed by Wavelink Corporation (Wavelink) of Kirkland, Washington, to Oracle and imbedded in Oracle Retail Store Inventory Management.
- (v) the software component known as **Crystal Enterprise Professional and/or Crystal Reports Professional** licensed by Business Objects Software Limited (“Business Objects”) and imbedded in Oracle Retail Store Inventory Management.
- (vi) the software component known as **Access Via**TM licensed by Access Via of Seattle, Washington, and imbedded in Oracle Retail Signs and Oracle Retail Labels and Tags.
- (vii) the software component known as **Adobe Flex**TM licensed by Adobe Systems Incorporated of San Jose, California, and imbedded in Oracle Retail Promotion Planning & Optimization application.
- (viii) the software component known as **Style Report**TM developed and licensed by InetSoft Technology Corp. of Piscataway, New Jersey, to Oracle and imbedded in the Oracle Retail Value Chain Collaboration application.
- (ix) the software component known as **WebLogic**TM developed and licensed by BEA Systems, Inc. of San Jose, California, to Oracle and imbedded in the Oracle Retail Value Chain Collaboration application.
- (x) the software component known as **DataBeacon**TM developed and licensed by Cognos Incorporated of Ottawa, Ontario, Canada, to Oracle and imbedded in the Oracle Retail Value Chain Collaboration application.

Contents

Preface	vii
Audience	vii
Related Documents.....	vii
Customer Support.....	viii
Review Patch Documentation.....	viii
Oracle Retail Documentation on the Oracle Technology Network.....	viii
Conventions.....	viii
1 Introduction to Merchandising Batch Processing	1
Batch Processing.....	1
Types of Batch Programs	1
Batch Window	2
Batch Schedule and Phases.....	2
Merchandising Batch Schedule.....	3
Program List	3
Batch Schedule Diagram	5
RMS, ReIM, RTM Section	5
ReSA Section.....	6
RPM Section.....	6
Notations in the Batch Schedule Diagram.....	7
prepost Program	8
Modifications to the Batch Schedule	9
2 Program List.....	11
3 Batch Schedule Diagram	17
4 Interface Diagrams for RMS and RPAS	19
RMS Pre/Post Extract Diagrams	20
RMS Foundation Data Extract Diagrams	21
RMS Fact Data Extract Diagrams.....	23
RPAS-RMS Fact Load Diagram	24
5 Interface Diagrams for RMS and RDW.....	25
6 Interface Diagram for RPM and RDW.....	37
7 Interface Diagram for ReIM and RDW	39
8 Interface Diagrams for RMS and AIP	41

Preface

This batch schedule document details the integrated cyclical processing schedules for the Oracle Retail Merchandising applications:

- Oracle Retail Merchandising System (RMS)
- Oracle Retail Invoice Matching (ReIM)
- Oracle Retail Price Management (RPM)
- Oracle Retail Sales Audit (ReSA)
- Oracle Retail Trade Management (RTM)
- Oracle Retail Allocation

Note: Although Oracle Retail Allocation is a Merchandising application, it is not represented in this batch schedule because it does not have any batch programs to run. All Allocation processing is online processing.

This guide describes the periodic and ad hoc phases of batch processing, as well as pre- and post-processing dependencies.

Audience

The audiences for this guide are as follows:

- Systems analysts and system operations personnel who need information about Merchandising processes, internally or in relation to systems across the enterprise
- Integrators and implementation staff who have the overall responsibility for implementing the Merchandising applications in their enterprise

Related Documents

For more information, see the following documents for the Oracle Retail Merchandising products:

- Oracle Retail Advanced Inventory Planning documentation
- *Oracle Retail Data Warehouse Operations Guide*
- Oracle Retail Demand Forecasting documentation
- *Oracle Retail Invoice Matching Operations Guide*
- *Oracle Retail Merchandising Implementation Guide*
- *Oracle Retail Merchandising System Operations Guide*
- Oracle Retail Predictive Application Server documentation
- *Oracle Retail Price Management Operations Guide*

Customer Support

<https://metalink.oracle.com>

When contacting Customer Support, please provide the following:

- Product version and program/module name
- Functional and technical description of the problem (include business impact)
- Detailed step-by-step instructions to re-create
- Exact error message received
- Screen shots of each step you take

Review Patch Documentation

For a base release (".0" release, such as 13.0), Oracle Retail strongly recommends that you read all patch documentation before you begin installation procedures. Patch documentation can contain critical information related to the base release, based on new information and code changes that have been made since the base release.

Oracle Retail Documentation on the Oracle Technology Network

In addition to being packaged with each product release (on the base or patch level), all Oracle Retail documentation is available on the following Web site:

http://www.oracle.com/technology/documentation/oracle_retail.html

Documentation should be available on this Web site within a month after a product release. Note that documentation is always available with the packaged code on the release date.

Conventions

Navigate: This is a navigate statement. It tells you how to get to the start of the procedure and ends with a screen shot of the starting point and the statement “the Window Name window opens.”

Note: This is a note. It is used to call out information that is important, but not necessarily part of the procedure.

This is a code sample
It is used to display examples of code

[A hyperlink appears like this.](#)

Introduction to Merchandising Batch Processing

This chapter is a brief introduction to Oracle Retail batch processing. It defines basic terms and concepts, describes batch processing phases, and explains how to interpret the batch schedule diagram and program list.

Batch Processing

Batch processing is the execution of a group of batch programs (jobs). The results are returned without user intervention. Batch programs are commonly used for the following reasons:

- To process large volumes of transaction data
- To interface with external systems
- To perform internal maintenance

Batch programs can process very large quantities of data quickly and efficiently. Batch programs can perform some updates that could be performed through online transactions, but much more quickly and with less impact on system performance. Batch processing is usually scheduled for times when systems are idle or least busy.

Batch programs can be run automatically using batch scheduler software. The batch scheduler allows batch jobs to be set up in a specific order, with restrictions attached to any program as needed. If an error occurs with a batch program, an administrator must correct the error and manually rerun the batch program that failed.

Types of Batch Programs

Oracle Retail batch programs are of several types:

- Upload programs bring data from external systems into the Oracle Retail database. For example, the `posupld` program uploads daily transactions that occur at the point of sale (POS) for processing by the Oracle Retail Management System (RMS).
- Download programs extract data from RMS and format it so it can be used by external systems. For example, the `posdnld` program extracts new and changed information about an item/location for downloading to the point of sale.
- System maintenance programs perform tasks such as updating the system date. For example, the `dtesys` program increments the system date at the end of each batch cycle.
- Functional maintenance programs process data specific to a functional area. For example, the `storeadd` program updates a number of tables to create entries for a new store.

Batch Window

Because of the impact on production systems, it is not always possible to run batch programs during business hours; however, there is a window of opportunity during each day or night when online systems are not being used. This time frame is the *batch window*. For example, a retailer with stores throughout the continental U.S. might require its online systems to be available from 8 AM Eastern Standard Time, when its East Coast offices open, until 9 PM Pacific Standard Time, when its West Coast stores close. This allows an eight-hour batch window for processing all batch jobs.

Batch Schedule and Phases

Order is critical when running batch programs. Some tasks need to be performed before others. A batch schedule ensures that every time batch processing is performed, the correct tasks are performed in the proper order.

The batch schedule is a diagram that represents all batch programs and how they are sequenced. For each individual user, the schedule is a suggested starting point for the installation. Some programs are specific to products that may not be installed, so these programs may not be used at all.

The total batch schedule is divided into phases. Each phase must be completed before the next phase can begin. Within a phase, there may also be programs that depend on the completion of another program within that phase, so programs within each phase may need to be run in a particular order.

Merchandising Batch Schedule

The integrated Merchandising batch schedule combines the batch schedules of all Merchandising applications into a single schedule diagram. The diagram (later in this document) shows the batch dependencies among the Merchandising applications.

The integrated Merchandising batch schedule combines the batch modules for the following applications:

- Oracle Retail Merchandising System (RMS)
- Oracle Retail Trade Management (RTM)
- Oracle Retail Sales Audit (ReSA)
- Oracle Retail Invoice Matching (ReIM)
- Oracle Retail Price Management (RPM)

Note: Although Oracle Retail Allocation is a Merchandising application, it is not represented in this batch schedule because it does not have any batch programs to run. All Allocation processing is online processing.

Program List

The columns of the program list provide details about each batch program, as follows:

Column	Description
Program name	Name of the program or script
Functional area	Functional area of the application for which the batch program is run
Threaded	Whether the program is threaded (Y/N)
Driver	Program driver
Phase	Phase during which the program is run (see the batch schedule diagram)
Pre-dependency	Programs that must be completed before the program can be run
Post-dependency	Programs that must be run after the program completes successfully
Timing	How often the program is run (for example, daily, weekly, monthly, ad hoc)
Restart/Recovery	Whether the program uses restart/recovery (R=Yes, N=No)
Run Parameters for Program	Command syntax to run the program

For example, the following shows the information in the program list about an RMS phase 3 program named dealday:

Program Name	dealday
Functional Area	Deals
Threaded	Y
Driver	Location
Phase	3
Pre-dependency	dealinc, dealfinc, prepost dealday pre
Post-dependency	prepost dealday post, salmnth
Timing	Monthly
Restart/Recovery	R
Usage	dealday userid/passwd

The program list is grouped in the following order:

- RMS, RTM, and ReSA programs
- RPM programs
- ReIM programs
- RMS extracts for Retail Predictive Application Server (RPAS)
- RMS extracts for Retail Data Warehouse (RDW)

The extracts for RPAS and RDW are programs that are part of the RMS application.

Batch Schedule Diagram

The batch schedule diagram illustrates the program list pre- and post-dependency details. The layout and notations of the diagram also illustrate required sequences and other processing details. Executing the Merchandising batch processing in the manner diagrammed ensures that all critical dependencies are met.

For ease of setting up a schedule at client site, and also based on logical application dependencies, the diagram is divided into three main sections:

- RMS, RTM, ReIM
- ReSA
- RPM

Later chapters of this document show data flow diagrams for other batch processes:

- Chapter 4 shows the Retail Extract, Transform, and Load (RETL) data flows for the extracts from RMS to RPAS.
- Chapter 5 shows the RETL dimension and fact data flows for the extracts from RMS to Oracle Retail Data Warehouse (RDW).
- Chapter 6 shows the RETL data flow for the Promotion dimension extract from RPM to RDW.
- Chapter 7 shows the RETL data flow for the Supplier Invoice Cost dimension extract from ReIM to RDW.
- Chapter 8 shows the RETL data flows for the extracts from RMS to Oracle Retail Advanced Inventory Planning (AIP).

RMS, ReIM, RTM Section

The first section diagrams the RMS, ReIM, and RTM programs and their dependencies. This section is further divided into phases 0 through 7, ad hoc, and date set batch.


Each phase must be completed before the next phase can begin. Also, a phase may contain programs that depend on other programs within the phase. Programs within each phase may need to run in a particular sequence.

The following are brief descriptions of the Merchandising batch processing phases. Depending on your implementation, some programs and phases may not apply.

Phase	Description
Phase 0	The first phase performs essential table maintenance including: <ul style="list-style-type: none"> ▪ Daily purges ▪ Updates to currency exchange rates ▪ Updates to value-added tax (VAT) data
Phase 1	This phase prepares the tables for interfacing with external systems in Phase 2. Among other programs, the stock variance (stkvar) batch program is run to update stock counts.
Phase 2	During this phase, information is uploaded from external interfaces, including point of sale (POS) data (posupld batch program).
Phase 3	In this phase, the main RMS processing programs are run for purchasing, ordering, stock ledger, deals, and replenishment.

Phase	Description
Phase 4	This phase pushes data to external sources. Changed system information is rebuilt. Open to buy (OTB) data is updated. Information is sent to the forecasting system.
Phase 5	This phase consists of ReIM process upload programs.
Phase 6	This phase consists of ReIM process roll-up programs.
Phase 7	This phase consists of ReIM process download programs.
Ad Hoc	Ad hoc batch programs can be run at any time. The ad hoc programs have no phase dependencies.
Date Set	The Date Set phase increments the system date and updates other calendar dates. Note: The date set phase should be the very last phase to run. Even the ad hoc programs should be run before the date set program.

Read the batch schedule diagram from left to right. In the following example, any of the programs (ediupavl, ediupack, stkvar, ditinsrt, lifstkup, ReceiverAdjustment, DiscrepancyPurge) can start at the same time; however, the stkupld program cannot start until the lifstkup program is successfully completed.

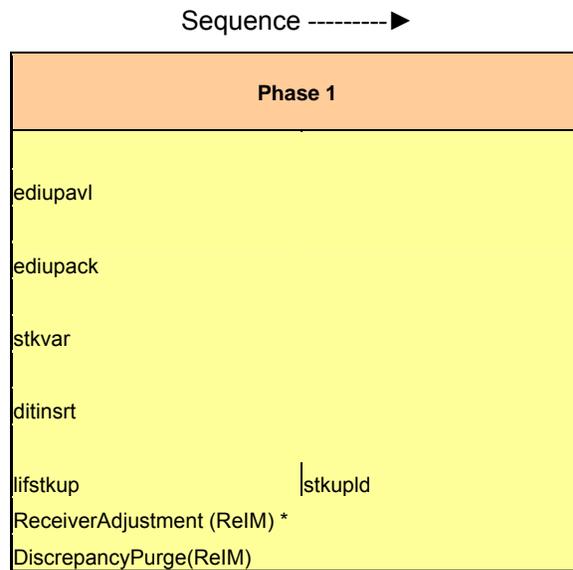

ReSA Section

This section diagrams the ReSA programs and their dependencies.

RPM Section

This section diagrams the RPM programs and their dependencies.

Notations in the Batch Schedule Diagram

Pipes

Pipes are vertical bars (|) that represent the dependencies within a phase. Reading left to right, a pipe indicates that one or more programs to the right depend upon completion of one or more programs to the left.

In the following example, the stkupld module depends on the lifstkup module; that is, the stkupld module can be run only after successful completion of the lifstkup module.

lifstkup	stkupld
----------	---------

In the following example, both of the modules cntrordb and reqext are dependent on ociroq. Neither cntrordb nor reqext can be run until the ociroq module has completed successfully.

ociroq	cntrordb reqext
--------	--------------------

In the following example, the ibcalc module is dependent on both ibexpl and cntrprss. The ibcalc module cannot be run until both ibexpl and cntrprss have completed successfully.

ibexpl cntrprss	ibcalc
--------------------	--------

Abbreviations

In the diagram, abbreviations in parentheses that follow program names have the following meanings:

Abbreviation	Meaning
(perl)	The module is a Perl script.
(FIF)	The module is related to the Financials application.
(sqlldr)	There is a sqlloader process to load/ftp the output files.
(rebuild all)	There is a rebuild process inside the application.
(IM)	The module is related to Invoice Matching but owned by RMS.
(RMS)	The module belongs to RMS.
(RMS)	(Bold type) The RMS module is executed externally to that phase.
(ReSA)	The module belongs to ReSA.
(ReSA)	(Bold type) The ReSA module is executed externally to that phase.
(ReIM)	The module belongs to ReIM.
(RTM)	The module belongs to RTM.
(Weekly)	The module is executed weekly.
(Monthly)	The module is executed monthly.
(Forms Auditing)	This is an online forms auditing process related to ReSA.

Footnotes

Footnote symbols (*, **, †, ‡) refer to footnotes that appear below that phase or section of the diagram.

prepost Program

The prepost program facilitates multi-threading by allowing general system administration functions (such as table deletions or mass updates) to be completed after all threads of a particular program have been processed. The prepost program must be run before, after, or both before and after, programs that require specific processing to run or complete successfully.

In the batch schedule diagram, the prepost program is indicated by “pre” and “post” entries, as in the following examples.

In the following example, preprocessing is required before running the ociroq program.

pre	ociroq
------------	---------------

In the following example, preprocessing is required before running the stkupd program. Also, post-processing is required after successful completion of the stkupd program.

pre	stkupd	post
------------	---------------	-------------

In the following example, post-processing is required after successful completion of the sccest program.

sccest	post
---------------	-------------

Modifications to the Batch Schedule

The integrated Merchandising batch schedule shows the dependencies for all the programs that *could* be run by a retailer. Based on many factors, there will always be some programs that a retailer does not run. Determining which programs, or groups of programs, are not required is a job that should be performed at implementation time.

One major factor involves the applications that the retailer has purchased and wants to install:

- For example, a retailer may have purchased RMS, but not ReIM; in this case, the ReIM programs would not be run.
- Another example is that a retailer may not want to use some functionality within an application. Perhaps a retailer purchased RMS but did not purchase the RDW application. In this case, the retailer may not want to run the programs that extract RMS data to be used later by the RDW application.

These major configuration choices also affect whether some programs are used:

- Whether the Retail Integration Bus (RIB) is used
For more information about configuring the RIB for Merchandising applications, see “Configuring RPM without the RIB” in the “Backend System Administration and Configuration” chapter of the *Oracle Retail Price Management Operations Guide*.
- Whether full-featured or simplified Retail Price Management (RPM) is used
For more information about configuring simplified RPM, see the “Backend System Administration and Configuration” chapter in the *Oracle Retail Price Management Operations Guide*.
- Whether full-featured or simplified RTM is used
For more information about configuring simplified RTM, see the “Oracle Retail Trade Management Batch” chapter in Volume 1 of the *Oracle Retail Merchandising System Operations Guide*.

RMS,RTM,ReSA Program Dependency and Scheduling Details

Program Name	Functional Area	Threaded	Driver	Phase	Pre-dependency	Post-dependency	Timing	Uses Restart/Recovery	Run Parameters for Programs
auditprg	Audit	N	N/A	ad hoc	N/A	N/A	daily	N	auditprg user/passwd
auditsys	Audit	N	N/A	ad hoc	N/A	N/A	daily	N	auditsys user/passwd
batch_orpos_extract.ksh	Point of Sale Interface	Y	Store	4	If RPM pricing info is reqd then run after extraction script	postoid (only if generic POS extract is used)	daily	N	batch_orpos_extract.ksh user/passwd [-p <no. of threads>] [DIR - location where extracts are to be generated]
ccprg	Costing	N	N/A	ad hoc	RPMtoORPOSPublishExport.sh	prepost poscnidk post	monthly	N	ccprg user/passwd
cednid	Trade Management	Y	Broker	2	N/A	N/A	daily	R	cednid user/passwd broker_file_name
cmprpg	Pricing	N	N/A	ad hoc	N/A	N/A	daily	R	cmprpg user/passwd
cmrpkid	Pricing	N	N/A	ad hoc	N/A	All RPM batch modules	ad hoc	R	cmrpkid user/passwd input_file reject_file
cntrmain	Contracting	N	N/A	0	N/A	All Replenishment modules	daily	R	cntrmain user/passwd
cntrordb	Contracting	Y	Contract	3	rpladj	prepost cntrordb post	daily	R	cntrordb user/passwd
cntrps	Contracting	Y	Dept	3	rplxt	prepost cntrps post	daily	R	cntrps user/passwd
costcalc	Deals	Y	Supplier	2	precostcalc	prepost costcalc post	daily	R	costcalc user/passwd supplier (May use the batch_costcalc.ksh for launching this program as it is created based on performance considerations)
cremthierdy	Reclassification	N	N/A	4	N/A	prepost cremthierdy post	daily	R	cremthierdy user/passwd
deact	Deals	Y	Deal Id	3	prepost deact_nor pre	N/A	daily	R	deact user/passwd
dealcls	Deals	N	N/A	3	prepost dealcls sales pre	N/A	daily	R	dealcls user/passwd
dealdy	Deals	Y	Location	3	prepost dealdy pre	prepost dealdy post	monthly	R	dealdy user/passwd
dealex	Deals	Y	Deal Id	3	prepost dealex pre	dealex	daily	N	dealex user/passwd
dealfct	Deals	Y	Deal Id	3	prepost dealfct pre	dealfct	daily	R	dealfct user/passwd [Y/N - EOM processing ind]
dealfnc	Deals	Y	Deal Id	3	dealfnc	dealfnc	weekly/ad hoc	R	dealfnc user/passwd
dealinc	Deals	Y	Deal Id	3	prepost dealinc pre	dealinc (if monthly)	monthly	R	dealinc user/passwd [Y/N - EOM processing ind]
dealprg	Deals	N	N/A	ad hoc	N/A	N/A	monthly	R	dealprg user/passwd
dealupid	Deals	Y	File-based	0	(This program is the first one in Deals batch)	N/A	daily	R	dealupid user/passwd input_file reject_file
dfribd	Item Maintenance	Y	Dept	3	(This program will likely be run after sales information is uploaded into Oracle Retail)	ISOL*Load the output file	daily	R	dfribd user/passwd outfile
discothappy	OTB	Y	Dept	4	orrdscrt	N/A	daily	R	discothappy user/passwd
distroccpub	Pricing/Transfers/Allocation Publish	Y	Store	3	PriceEventExecutionBatch(RPM)	N/A	daily	R	distroccpub user/passwd
dlinsrt	Deals	N	N/A	1	N/A	costcalc	daily	R	dlinsrt user/passwd
dlprg	Maintenance	N	N/A	0	N/A	(All other batch programs)	daily	R	dlprg user/passwd
docclose	Receiving	N	N/A	ad hoc	N/A	N/A	daily	R	docclose user/passwd
dtesys	Calendar	N	N/A	date_set	the batch cycle	prepost dtesys post	daily	N	dtesys user/passwd [ndate-YYYYMMDD format]
dummysch	Receiving	N	N/A	ad hoc	N/A	N/A	daily	N	dummysch user/passwd
ediadd	Maintenance	N	N/A	ad hoc	N/A	N/A	ad hoc	N	ediadd user/passwd ediadd_output ediadd_catalog
edidcon	Contracting	N	N/A	ad hoc	N/A	N/A	ad hoc	N	edidcon user/passwd edidcon_outfile
edidinv	Invoice Matching	Y	Location	4	N/A	N/A	daily	R	edidinv user/passwd output_filename
edidord	Ordering	N	N/A	4	batch	prepost edidord post	ad hoc	R	edidord user/passwd filename
edidprd	EDI Interface - Sales and Inventory	N	N/A	ad hoc	prepost edidprd pre	N/A	daily	R	edidprd user/passwd filename
edipack	EDI Interface - Purge	N	N/A	ad hoc	(Towards the end of the batch cycle)	N/A	monthly	R	edipack user/passwd input_file reject_file
edupack	Maintenance	N	File-based	2	N/A	N/A	daily	R	edupack user/passwd data_file reject_file
edupavl	EDI Interface - ordering	N	N/A	1	N/A	N/A	ad hoc	R	edupavl user/passwd input_file reject_file
edupcvt	EDI Interface - Contracts	N	File-based	1	N/A	N/A	daily	R	edupcvt user/passwd input_file reject_file
elcostcalc	EDI Interface - Suppliers	N	File-based	ad hoc	N/A	N/A	daily	R	elcostcalc user/passwd ed_data_file_error_file
elcostcalc	Costing	Y	Supplier	ad hoc	N/A	prepost elcostcalc post	ad hoc	R	elcostcalc user/passwd
fcstrpg	Forecasting	Y	Domain id	ad hoc	prepost fcstrpg pre	N/A	daily	N	fcstrpg user/passwd domain
fcstrbid	Forecasting	Y	Domain id	3	N/A	prepost fcstrbid post	weekly	R	fcstrbid user/passwd
fcstrbid_sbc	Forecasting	Y	Domain id	3	prepost fcstrbid post	salstage	weekly	R	fcstrbid_sbc user/passwd
figldn1	Financial Interface	Y	Dept	3	salstage	prepost figldn1 post	daily	R	figldn1 user/passwd
figldn2	Financial Interface	Y	Dept	3	salstage	salstage	daily	R	figldn2 user/passwd
figldn3	Financial Interface	Y	Store/Wh	3	salstage	N/A	monthly	R	figldn3 user/passwd
ftmednid	Planning System Interface	N	N/A	ad hoc	N/A	N/A	ad hoc	R	ftmednid user/passwd
goupid	Misc Interface - Taxgeocode	N	N/A	ad hoc	N/A	N/A	ad hoc	R	goupid <username>/password@environment> <infile> <outfile>
genpress	Ordering	Y	Supplier	ad hoc	N/A	N/A	ad hoc	R	genpress user/passwd
gradupid	Forecasting	N	File-based	ad hoc	N/A	N/A	ad hoc	R	gradupid user/passwd input_file rej_file
hstbid	Sales	Y	Location	3	posupid	prepost hstbid post	weekly	R	hstbid user/passwd level(weekly/rebuild)
hstbid_diff	Sales	N	N/A	ad hoc	hstbid	prepost hstbid post	ad hoc	N	hstbid_diff user/passwd
hstbidmth	Sales	Y	Dept	3	posupid	prepost hstbidmth post	monthly	R	hstbidmth user/passwd level(monthly/rebuild)
hstbidmth_diff	Sales	N	N/A	ad hoc	N/A	prepost hstbidmth post	ad hoc	N	hstbidmth_diff user/passwd
hstmthupd	Sales	Y	Location	3	(The program should be run on the last day of the month).	Run SQL*Loader using the control file hstmthupd.ctl to load data from the output file written by HSTMTHUPD.PC for non-existent records on ITEM_LOC_HIST_MTH)	monthly	R	hstmthupd user/passwd (out_file)
hstrpg	Sales	N	N/A	ad hoc	N/A	N/A	monthly	N	hstrpg user/passwd
hstrpg_diff	Sales	N	N/A	ad hoc	N/A	N/A	weekly	N	hstrpg_diff user/passwd
hstwkupd	Sales	Y	Store/Wh	3	N/A	Run SQL*Loader using the control file hstwkupd.ctl to load data from the output file written by HSTWKUPD.PC for non-existent records on ITEM_LOC_HIST	weekly	R	hstwkupd user/passwd (out_file)
htsupid	Trade Management	Y	File-based	ad hoc	Hts240_to_2400 (perl script) Uhs2ms (perl script)	prepost htstupid pre	ad hoc	R	htstupid user/passwd input_file reject_file country_id ; perl hts_240_to_2400 inputfile.outfile ; perl uhs2ms inputfile.outfile rejectfile
ibcalc	Investment Buy	Y	Dept	3	repixt	prepost ibcalc pre	daily	R	ibcalc user/passwd
ibexpl	Investment Buy	N	N/A	3	rplxt	ibcalc	daily	N	ibexpl user/passwd
invaprg	Inventory Adjustments	N	N/A	ad hoc	N/A	N/A	monthly	N	invaprg user/passwd
invclshp	Invoice Matching	N	N/A	2	N/A	N/A	daily	N	invclshp user/passwd
invrg	Invoice Matching	N	N/A	ad hoc	ordrg	N/A	monthly	R	invrg user/passwd
lcardnid	Letter of Credit	N	N/A	4	N/A	lcm700 (perl script)	daily	R	lcardnid user/passwd output_file
lclrid	Maintenance - Location	N	N/A	ad hoc	storeadd	N/A	monthly	R	lclrid user/passwd
lcmchnd	Letter of Credit	N	N/A	4	N/A	lcm707 (perl script)	daily	R	lcmchnd user/passwd output_file
lcp798	Letter of Credit	N	N/A	2	lcm798 (perl script)	N/A	daily	R	lcp798 user/passwd input_file rej_file
lcpid	Letter of Credit	N	N/A	2	lcm730 (perl script)	N/A	daily	R	lcpid user/passwd input_file rej_file
lifstkg	Stock Ledger	N	File-based	1	inv_bsl_upload.sh (warehouse mgmt program)	stxupid	daily	N	lifstkg user/passwd input_file output_file
likestore	Maintenance - Location	Y	Dept	ad hoc	storeadd	prepost likestore post	daily	R	likestore user/passwd
mrt	Mass Return Transfers	Y	Warehouse	2	N/A	mrtupd	daily	R	mrt user/passwd
mtrpg	Mass Return Transfers	Y	Warehouse	ad hoc	N/A	N/A	ad hoc	R	mtrpg user/passwd
mtrtv	Mass Return Transfers	Y	Warehouse	2	mrt	mrtupd	daily	R	mtrtv user/passwd

P or S = program is either run for deals set up by supplier/partner is selected by

appropriate calling script and passed into program. Note: (May use the batch_dlinst.ksh for launching this program as it is created based on performance considerations)

DiscrepancyPurge	Invoice Matching (RelM)	N	N/A	1	N/A	N/A	daily	R	DiscrepancyPurge user/passwd
DisputedCreditMemoRollup	Invoice Matching (RelM)	N	N/A	6	ReasonCodeActionRollup	ResolutionPosting	daily	R	DisputedCreditMemoRollup user/passwd
EdiInvoiceUpload	Invoice Matching (RelM)	Y	N/A	5	edidinv(RMS)	AutoMatch	daily	R	EdiInvoiceUpload user/passwd "EDI input file with path" "EDI reject file with path"
EdiInvoiceDownload	Invoice Matching (RelM)	N	N/A	7	ResolutionPosting	N/A	daily	R	EdiInvoiceDownload user/passwd
FixedDealUpload	Invoice Matching (RelM)	Y	N/A	5	vendinv(RMS), vendinvr(RMS)	AutoMatch	daily	R	FixedDealUpload user/passwd BlockSize PartitionNo
ReasonCodeActionRollup	Invoice Matching (RelM)	N	N/A	6	AutoMatch	DisputedCreditMemoRollup	daily	R	ReasonCodeActionRollup user/passwd
ReceiptWriteoff	Invoice Matching (RelM)	N	N/A	6	AutoMatch	N/A	daily	R	ReceiptWriteoff user/passwd
ReceiverAdjustment	Invoice Matching (RelM)	N	N/A	1	EdiInvoiceUpload	ReasonCodeActionRollup	daily	R	ReceiverAdjustment user/passwd
ResolutionPosting	Invoice Matching (RelM)	N	N/A	6	DisputedCreditMemoRollup	N/A	daily	R	ResolutionPosting user/passwd
TermsRankingService	Invoice Matching (RelM)	N	N/A	6	N/A	AutoMatch	monthly	R	TermsRankingService user/passwd

RMS to RPAS RETL Extracts Dependency and Scheduling Details (EXTRACTS FOR RPAS)

Program Name	Functional Area	Threaded	Driver	Phase	Pre-dependency	Post-dependency	Timing	Uses Restart/Recovery	Run Parameters for Programs
pre_rmse_rpas.ksh	Planning/Forecast System Interface	N	N/A	N/A	N/A. This is a pre setup script	N/A	daily	N	N/A
rmse_rpas.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh. (This is the launch script to run the extracts)	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_attributes.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_daily_sales.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_domain.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_item_master.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_merchier.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_orghier.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_stock_on_hand.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_store.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_suppliers.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_weekly_sales.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_wh.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	N/A
rmsl_rpas_forecast.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	rmsl_rpas_forecast.ksh daily or weekly
rmsl_rpas_update_retl_date.ksh	Planning/Forecast System Interface	N	N/A	N/A	After all RMS/Planning System Integration RETL scripts are run	Refer to RPAS Operations guide	daily	N	rmsl_rpas_update_retl_date.ksh CLOSED ORDER or RECEIVED QTY

RMS to RDW RETL Extracts Dependency and Scheduling Details (EXTRACTS FOR RDW)

Program Name	Functional Area	Threaded	Driver	Phase	Pre-dependency	Post-dependency	Timing	Uses Restart/Recovery	Run Parameters for Programs
cdedtlx.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
cmptrex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
cmprtmex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
cmprtcax.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
crncydex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
emplyex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
orgaraex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), ldrbid (RMS)	Refer to RDW operations guide	daily	N	N/A
orghanax.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), ldrbid (RMS)	Refer to RDW operations guide	daily	N	N/A
orghnex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), ldrbid (RMS)	Refer to RDW operations guide	daily	N	N/A
orgdisex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), ldrbid (RMS)	Refer to RDW operations guide	daily	N	N/A
orglmex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), ldrbid (RMS)	Refer to RDW operations guide	daily	N	N/A
orglocex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), ldrbid (RMS)	Refer to RDW operations guide	daily	N	N/A
orglolex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), ldrbid (RMS)	Refer to RDW operations guide	daily	N	N/A
orgltmex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), ldrbid (RMS)	Refer to RDW operations guide	daily	N	N/A
orgltrex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), ldrbid (RMS)	Refer to RDW operations guide	daily	N	N/A
orgngex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), ldrbid (RMS)	Refer to RDW operations guide	daily	N	N/A
phasex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
prdisex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recsldy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prdcmpex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
prddpex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recsldy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prddifex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recsldy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prddivex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recsldy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prddypex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recsldy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prdrpex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recsldy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prdisex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
prdlsex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
prdtmex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recsldy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prdtmex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recsldy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prdtmex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recsldy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prdtmex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
prdtmex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
prdpimex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recsldy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A

prdsbcex.ksh	RDW interface	N	N/A	N/A	A, B, crenherdy (RMS), recisdy (RMS), dtyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prduaeex.ksh	RDW interface	N	N/A	N/A	A, B, crenherdy (RMS), recisdy (RMS), dtyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
regmgrpx.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
regmtox.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
rsnex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
seasnex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
subramrpx.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
supstrex.ksh	RDW interface	N	N/A	N/A	A, B, cntmain (RMS)	Refer to RDW operations guide	daily	N	N/A
supsupex.ksh	RDW interface	N	N/A	N/A	A, B, cntmain (RMS)	Refer to RDW operations guide	daily	N	N/A
suprmex.ksh	RDW interface	N	N/A	N/A	A, B, cntmain (RMS)	Refer to RDW operations guide	daily	N	N/A
suprtex.ksh	RDW interface	N	N/A	N/A	A, B, cntmain (RMS)	Refer to RDW operations guide	daily	N	N/A
tdmtyex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
ttityex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
wfucstex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
wfucstgrpx.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A

Program Name	Functional Area	Threaded	Driver	Phase	Pre-dependency	Post-dependency	Timing	Uses Restart/Recovery	Run Parameters for Programs
cmprtdex.ksh	RDW interface	N	N/A	N/A	B	Refer to RDW operations guide	daily	N	cmprtdex.ksh output_file_path/output_file_name
ctstldex.ksh	RDW interface	N	N/A	N/A	C	Refer to RDW operations guide	daily	N	ctstldex.ksh output_file_path/output_file_name
exchngatex.ksh	RDW interface	N	N/A	N/A	B	Refer to RDW operations guide	daily	N	exchngatex.ksh output_file_path/output_file_name
ivnlidx.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS), mrt (RMS), andrev (RMS)	Refer to RDW operations guide	daily	Y	ivnlidx.ksh output_file_path/output_file_name
ivalidx.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS), mrt (RMS)	Refer to RDW operations guide	daily	N	ivalidx.ksh output_file_path/output_file_name
ivrcpldex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS), mrt (RMS)	Refer to RDW operations guide	daily	N	ivrcpldex.ksh output_file_path/output_file_name
ivrlidx.ksh	RDW interface	N	N/A	N/A	C	Refer to RDW operations guide	daily	N	ivrlidx.ksh output_file_path/output_file_name
ivrlidx.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS), mrt (RMS)	Refer to RDW operations guide	daily	N	ivrlidx.ksh output_file_path/output_file_name
ivulidx.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS), mrt (RMS)	Refer to RDW operations guide	daily	N	ivulidx.ksh output_file_path/output_file_name
lptotidx.ksh	RDW interface	N	N/A	N/A	C, saexprow (ReSA), resa2row	Refer to RDW operations guide	daily	N	lptotidx.ksh output_file_path/output_file_name
lptotidx.ksh	RDW interface	N	N/A	N/A	C, saexprow (ReSA), resa2row	Refer to RDW operations guide	daily	N	lptotidx.ksh output_file_path/output_file_name
ncstulidx.ksh	RDW interface	N	N/A	N/A	C, costcalc (RMS)	Refer to RDW operations guide	daily	N	ncstulidx.ksh output_file_path/output_file_name
post_dw_temp.ksh	RDW interface	N	N/A	N/A	All extract batches	Refer to RDW operations guide	daily	N	N/A
prcidex.ksh	RDW interface	N	N/A	N/A	N/A	Refer to RDW operations guide	daily	N	prcidex.ksh output_file_path/output_file_name
pre_dw_extract.ksh	RDW interface	N	N/A	N/A	A	salmth(RMS). Also refer to RDW operations guide	daily	N	N/A
pre_dw_temp.ksh	RDW interface	N	N/A	N/A	B	Refer to RDW operations guide	daily	N	N/A
rplicdex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	N	rplicdex.ksh output_file_path/output_file_name
rplicdex.ksh	RDW interface	N	N/A	N/A	C, cntprss (RMS), edlupavl (RMS)	Refer to RDW operations guide	daily	N	rplicdex.ksh output_file_path/output_file_name
savidex.ksh	RDW interface	N	N/A	N/A	C, rplapprv (RMS)	Refer to RDW operations guide	daily	N	savidex.ksh output_file_path/output_file_name
scmaldex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	N	scmaldex.ksh output_file_path/output_file_name
scmidtdex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	N	scmidtdex.ksh output_file_path/output_file_name
scrtldex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	N	scrtldex.ksh output_file_path/output_file_name
scrtldex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	Y	scrtldex.ksh output_file_path/output_file_name
scldex.ksh	RDW interface	N	N/A	N/A	C, rplapprv (RMS), cntprss (RMS), rplbid (RMS), cntmain (RMS)	Refer to RDW operations guide	daily	N	scldex.ksh output_file_path/output_file_name
sfclwex.ksh	RDW interface	N	N/A	N/A	extract	Refer to RDW operations guide	daily	N	sfclwex.ksh output_file_path/output_file_name
slstldex.ksh	RDW interface	N	N/A	N/A	C, saexprow (ReSA), resa2row	Refer to RDW operations guide	daily	Y	slstldex.ksh output_file_path/output_file_name
slsmkndidx.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	N	slsmkndidx.ksh output_file_path/output_file_name
stlbimhex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	N	stlbimhex.ksh output_file_path/output_file_name
stlbwex.ksh	RDW interface	N	N/A	N/A	C, salweek (RMS)	Refer to RDW operations guide	daily	N	stlbwex.ksh output_file_path/output_file_name
stldmex.ksh	RDW interface	N	N/A	N/A	C, saexprow (ReSA), resa2row	Refer to RDW operations guide	daily	N	stldmex.ksh output_file_path/output_file_name
vhreschdex.ksh	RDW interface	N	N/A	N/A	B, savouch (ReSA)	Refer to RDW operations guide	daily	N	vhreschdex.ksh output_file_path/output_file_name
vhcmoveldgex.ksh	RDW interface	N	N/A	N/A	B, savouch (ReSA)	Refer to RDW operations guide	daily	N	vhcmoveldgex.ksh output_file_path/output_file_name
vhoutwex.ksh	RDW interface	N	N/A	N/A	B, savouch (ReSA)	Refer to RDW operations guide	daily	N	vhoutwex.ksh output_file_path/output_file_name
wfsltdex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	N	wfsltdex.ksh output_file_path/output_file_name
wfslmknidx.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	N	wfslmknidx.ksh output_file_path/output_file_name

Notes:
A is a set of batch processes on the RDW system.
A consists of the following RDW batch modules:
 factopendm.ksh
 medfactopendm.ksh
 factolosedm.ksh
 mt_prime.ksh
B is pre_dw_extract.ksh DWI batch process.
C is pre_dw_temp.ksh DWI batch process.

RMS to AIP RETL Extracts Dependency and Scheduling Details (EXTRACTS FOR AIP)

Program Name	Functional Area	Threaded	Driver	Phase	Pre-dependency	Post-dependency	Timing	Uses Restart/Recovery	Run Parameters for Programs
pre_rmse_aip.ksh	AIP interface	N	N/A	AIP RETL Extracts		Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_alloc_in_well.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh		Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_banded_item.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh, dtyprg		Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_cl_po.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh		tsprg and orbrg.	daily	N	N/A
rmse_aip_future_delivery_alloc.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh		Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_future_delivery_order.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh, vrpblid, cntnorb		Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_future_delivery_tsf.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh, reqext		Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_item_loc_traits.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh, dtyprg		Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_item_master.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh, recldy		Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_item_retail.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh, dtyprg		Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_item_sals.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh, alsmann		Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_item_supp_country.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh, dtyprg		Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_merchier.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh, dtyprg		Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_orghier.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh, dtyprg		Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_rec_qty.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh, vrpblid, cntnorb, reqext		Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_store.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh, storeadd, likestore, dtyprg		Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_substitute_items.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh		Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_suppliers.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh		Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_tsf_in_well.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh, reqext		Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_wh.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh, whadd and dtyprg		Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_store_cur_inventory.ksh	AIP interface	Y	Item_loc_soh (number of AIP RETL Extracts request, posupld)		pre_rmse_aip.ksh, stklar, wastead, salstage, rmse_store_cur_inventory.ksh (if running delta)	Refer to AIP Operations and Installation Guides	daily	N	D - single-threaded delta extract F - multi-threaded full extract if ITEM_LOC is partitioned; single-threaded full extract if ITEM_LOC is not partitioned
rmse_wh_cur_inventory.ksh	AIP interface	Y	Warehouse	AIP RETL Extracts extract, stklar, wastead, salstage, reqext		Refer to AIP Operations and Installation Guides	daily	N	D - single-threaded delta extract F - multi-threaded full extract if ITEM_LOC is partitioned; single-threaded full extract if ITEM_LOC is not partitioned

Interface Diagrams for RMS and RPAS


Because RMS is the retailer's central merchandising transactional processing system, it is the principle source of the foundation data needed in some of the Oracle Retail suite of products. RMS provides foundation data to RPAS, and RPAS provides planning data to RMS.

This chapter presents flow diagrams for data processing from sources. The source system's program or output file is illustrated, along with the program or process that interfaces with the source. After initial interface processing of the source, the diagrams illustrate the flow of the data.

Before setting up a program schedule, familiarize yourself with the functional and technical constraints associated with each program. Refer to the *Oracle Retail Merchandising System Operations Guide* for more information about these interface programs.

RMS Pre/Post Extract Diagrams


RMS Pre RETL Extract Maintenance

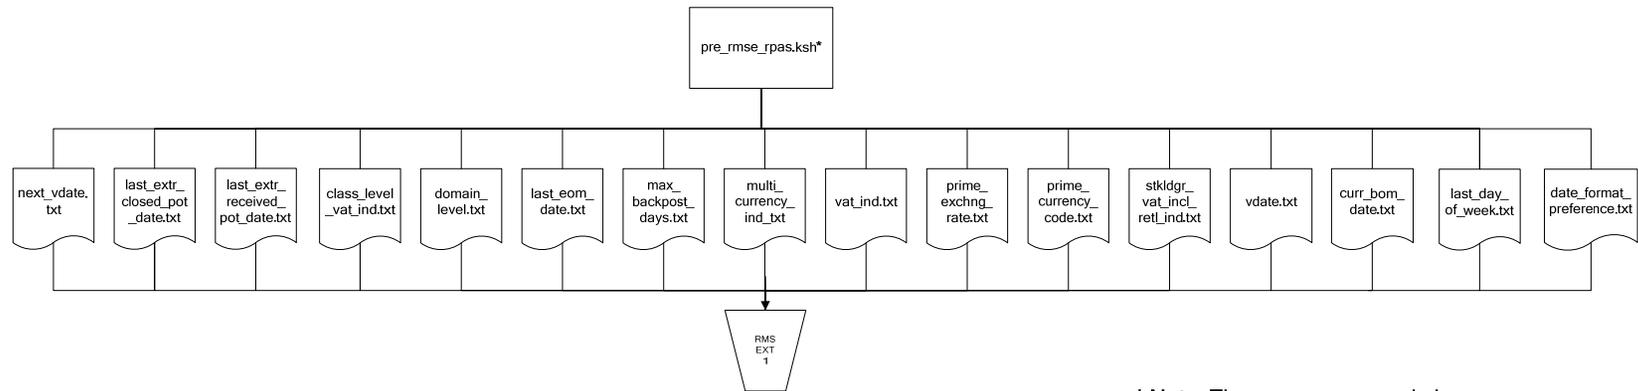


*** Note:** The `pre_rmse_rpas.ksh` program checks for existing `.txt` output files. Because of this validation, retailers running the program for the first time should include an optional `-c` parameter. This parameter allows the program to run successfully without pre-existing `.txt` output files.

RMS Foundation Data Extract Diagrams


Merchandise Hierarchy for RPAS

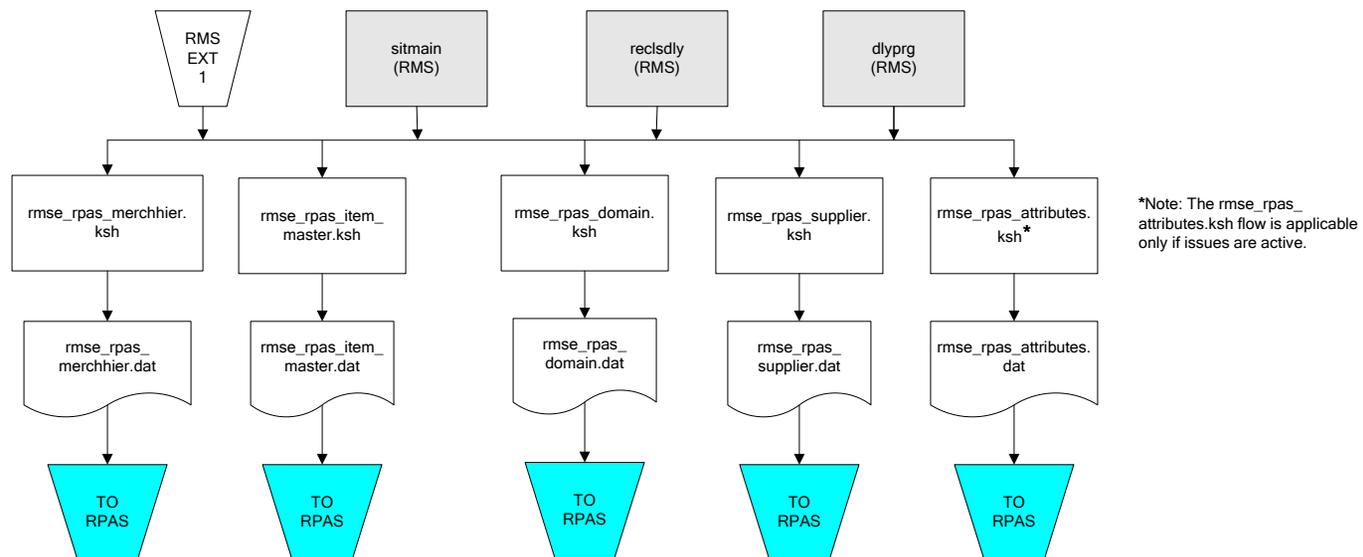

Organization Hierarchy for RPAS

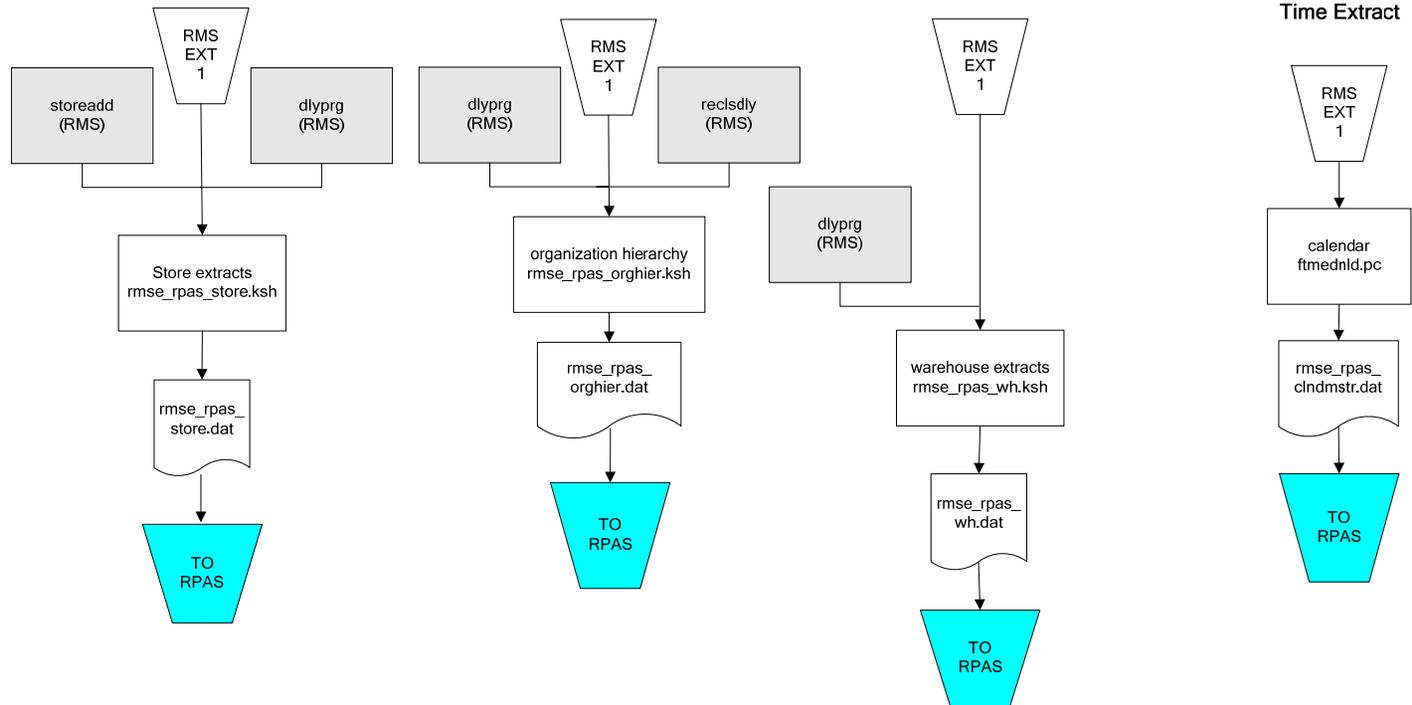

RMS Fact Data Extract Diagrams

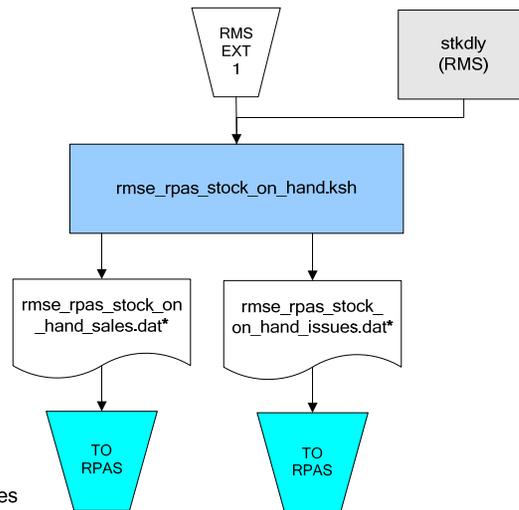


*** Note:**

If issues are active, the following two files result from the rmse_rpas_stock_on_hand.ksh flow:
 rmse_rpas_stock_on_hand_issues.dat
 rmse_rpas_stock_on_hand_sales.dat

If issues are **not** active, the following file results from the rmse_rpas_stock_on_hand.ksh flow:
 rmse_rpas_stock_on_hand_sales.dat


Sales Extracts For RPAS

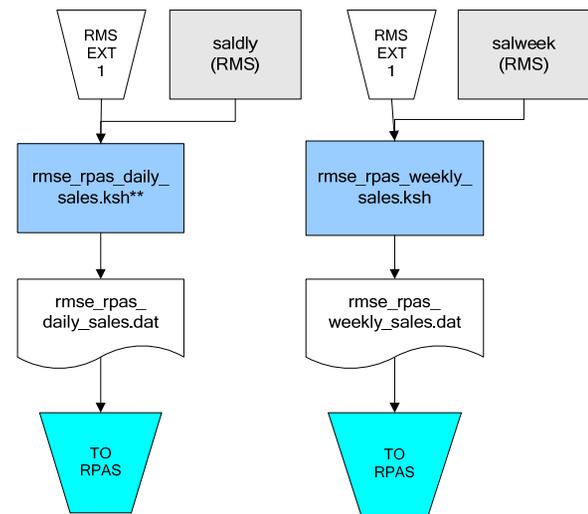

**** Note:**

Depending upon the configuration of rmse_rpas_daily_sales.ksh, the data can be pulled from TRAN_DATA_HISTORY or TRAN_DATA.

RPAS-RMS Fact Load Diagram

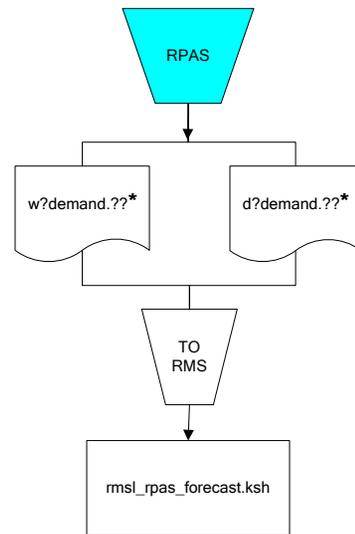

***Note:**

? can represent the following:

- i (for issues)
- s (for stores)

?? represents domain 01-99.

Interface Diagrams for RMS and RDW


RMS works in conjunction with the Oracle Retail Extract Transform and Load (RETL) framework. RETL provides high-performance processing to extract data from Oracle Retail applications for use in data warehouses. The architecture allows database batch processes to take advantage of parallel processing capabilities.

This chapter presents flow diagrams for the RETL extraction RMS programs. The source system's program or output file is illustrated, along with the program or process that interfaces with the source. Note that the data flows are organized according to the logic (dimension data and table data) of Oracle Retail Data Warehouse (RDW), but you can use the data to suit your business needs.

For detailed information about dimensions and facts, see the *Oracle Retail Data Warehouse Operations Guide*.


For summary information about the configuration, architecture, and features of RETL programs utilized in RMS/ReSA extractions, see the *Oracle Retail Management System Operations Guide Volume 3—Backend Configuration and Operations*. For more information about the RETL tool, see the current *RETL Programmer's Guide*.

Legend

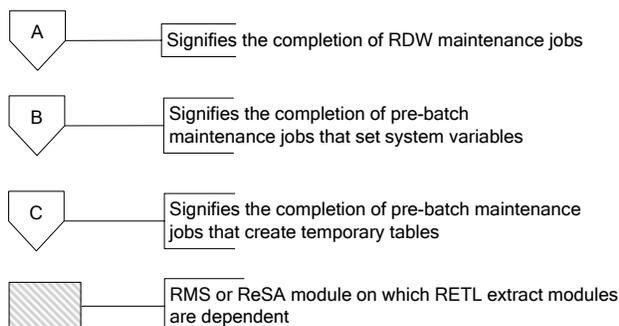


Note:
 The modules in this flow are RDW RETL scripts. If the retailer uses RDW, this flow must be completed before starting the pre-batch maintenance flow. If the retailer does not use RDW, these jobs are not required.

RDW Maintenance

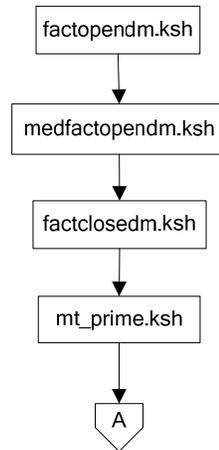


Pre-Batch Maintenance

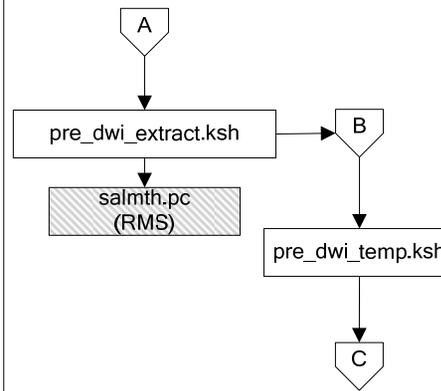


Note:
 salmth.pc resets the last eom_date. Thus, it must be run after the system indicator is extracted by pre_dwi_extract.ksh.


Post-Batch Maintenance

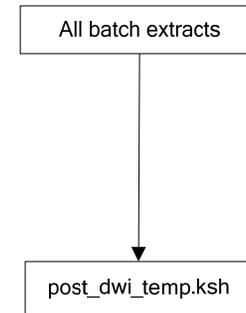


Dimension Dataflows

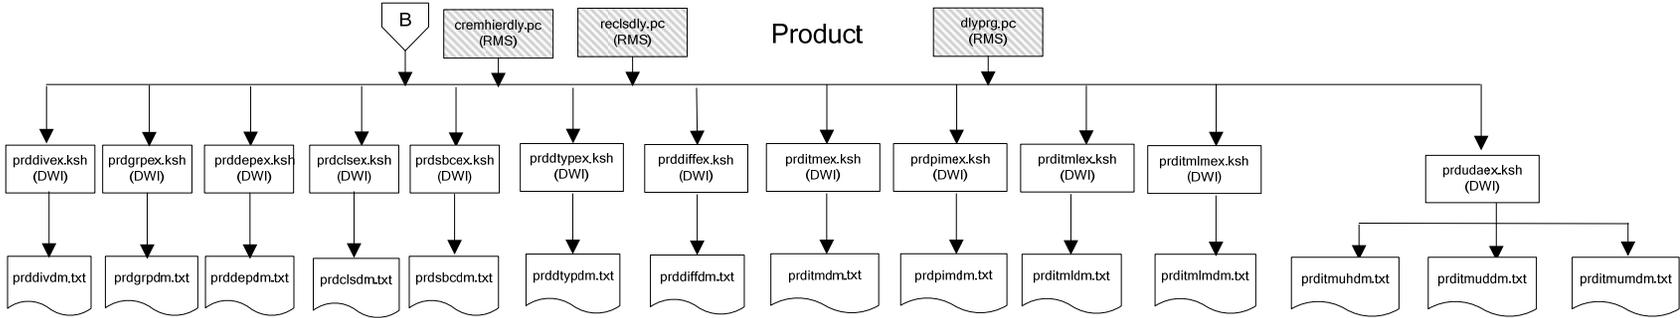


Dimension Dataflows

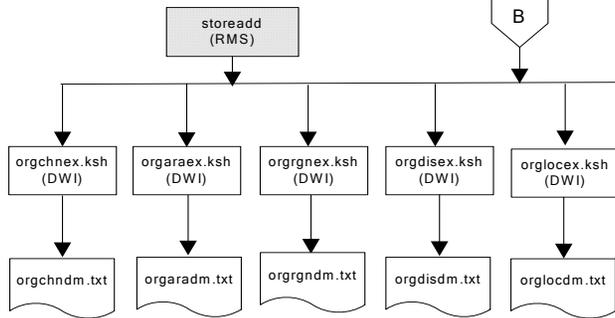


Organization

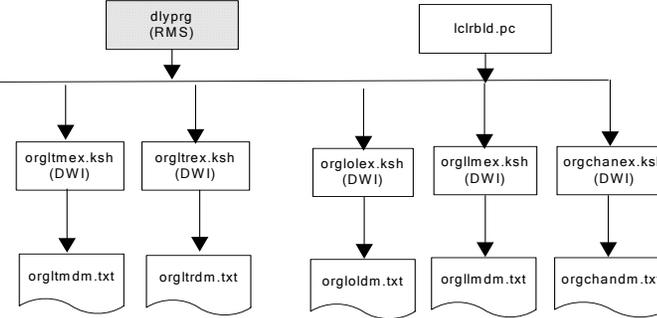


Supplier Dimension

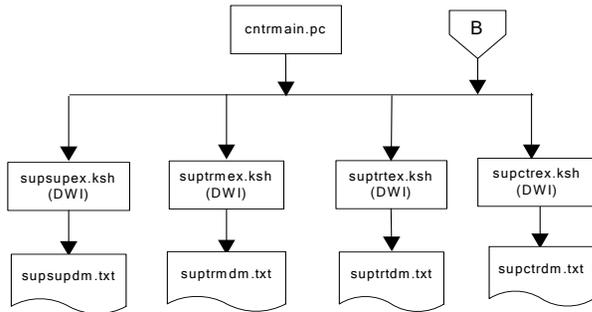


Item-Supplier-Location Matrix Dimension



Item-Supplier Dimension




Dimension Dataflows

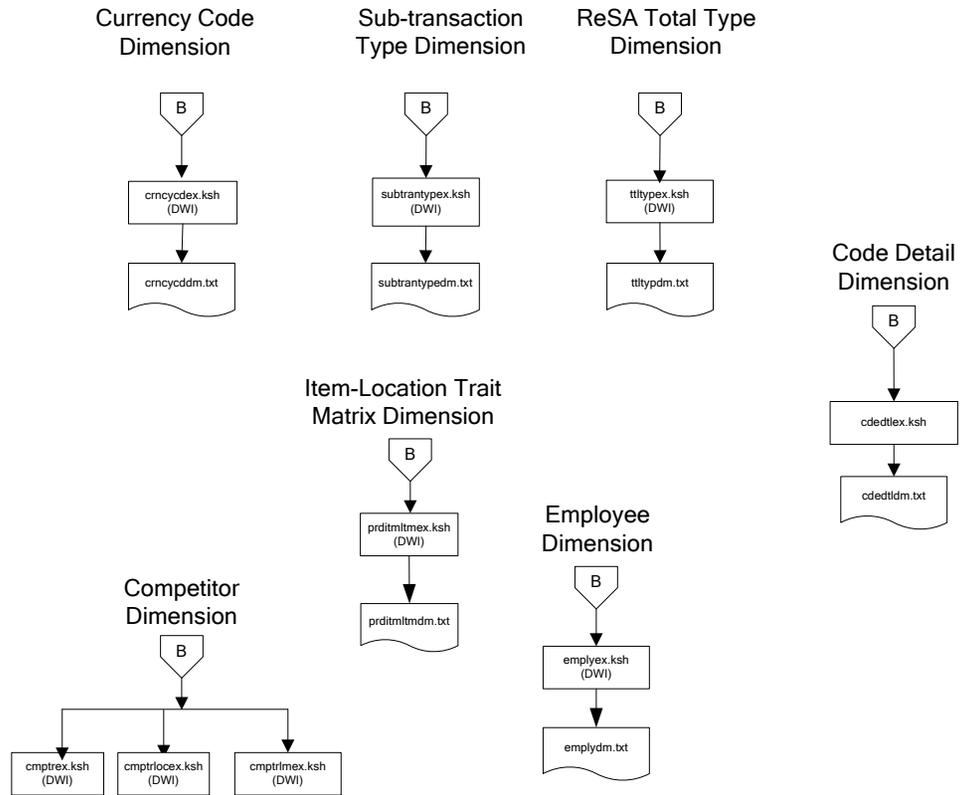


Dimension Dataflows


Product Season Dimension

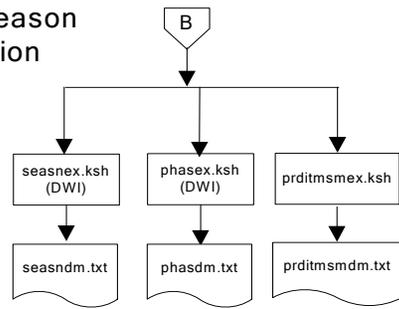


Tender Type Dimension

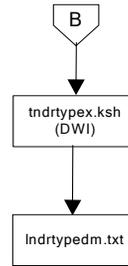



Reason Dimension

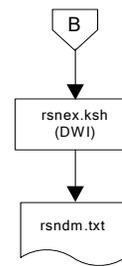




Regionality Dimension

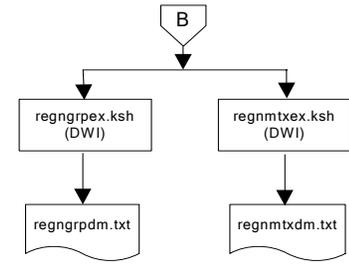


Fact Dataflows

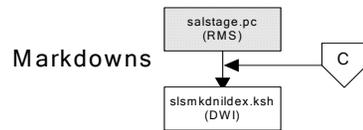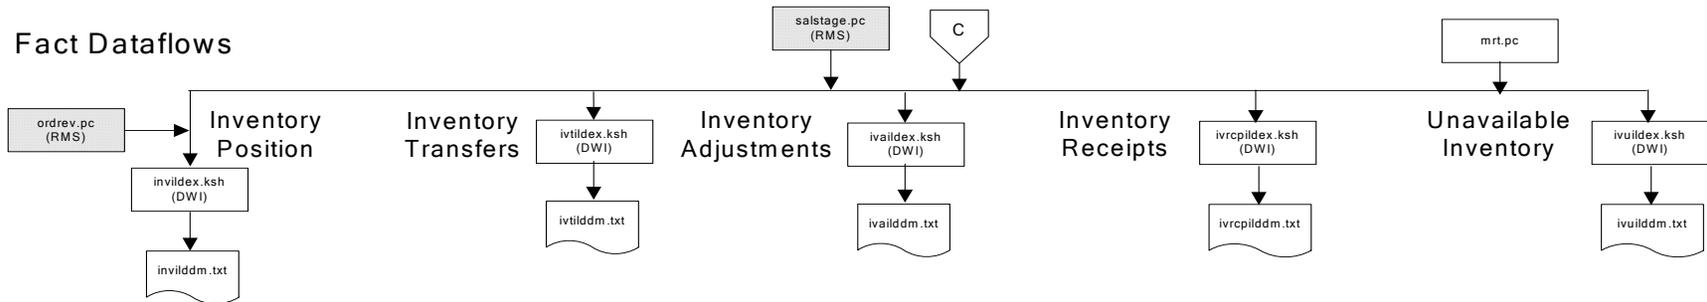

Fact Dataflows

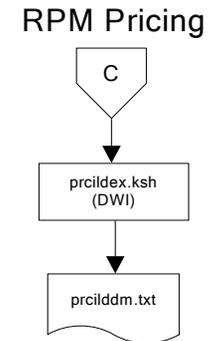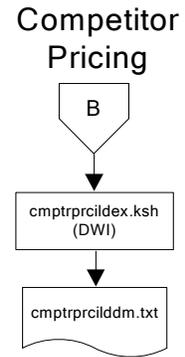
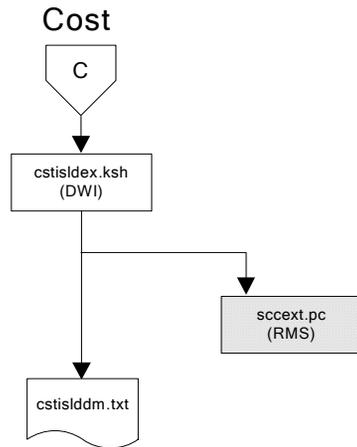


Stock Ledger

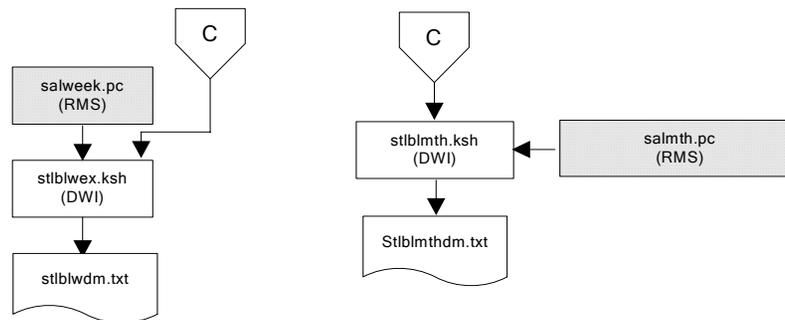


Note:
Run stock ledger fact loads once weekly.


Fact Dataflows

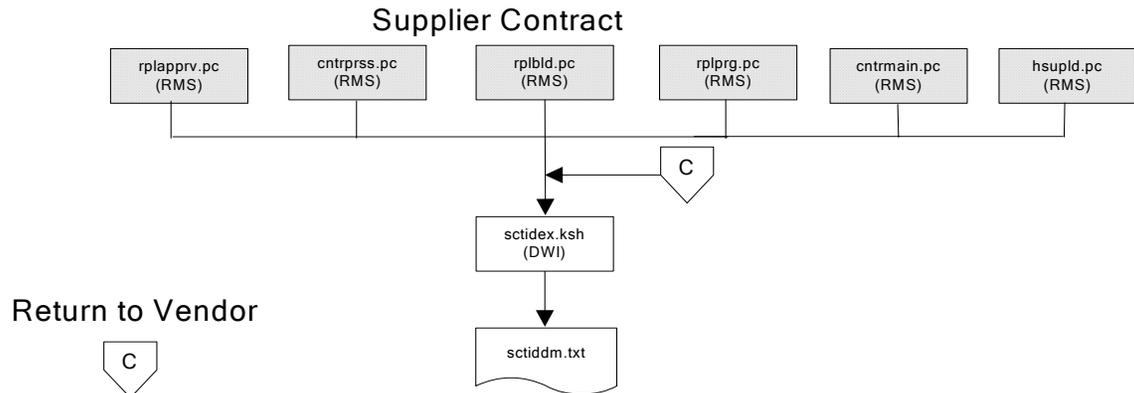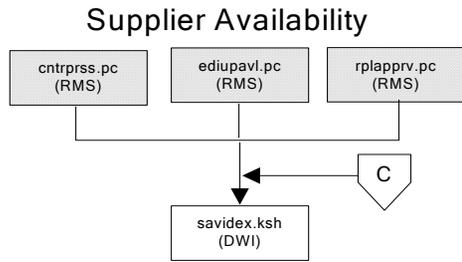

Return to Vendor

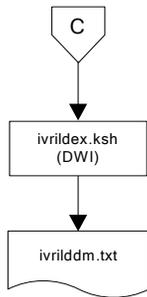


Net Cost

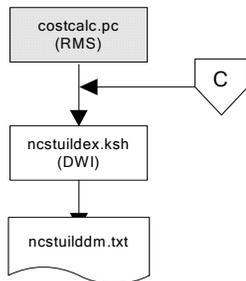


Fact Dataflows

Exchange Rates

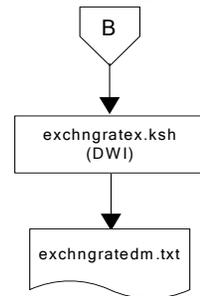


Sales Forecasts

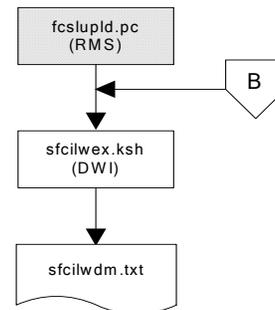


Note:
Run sales forecast fact loads
once weekly.

Fact Dataflows

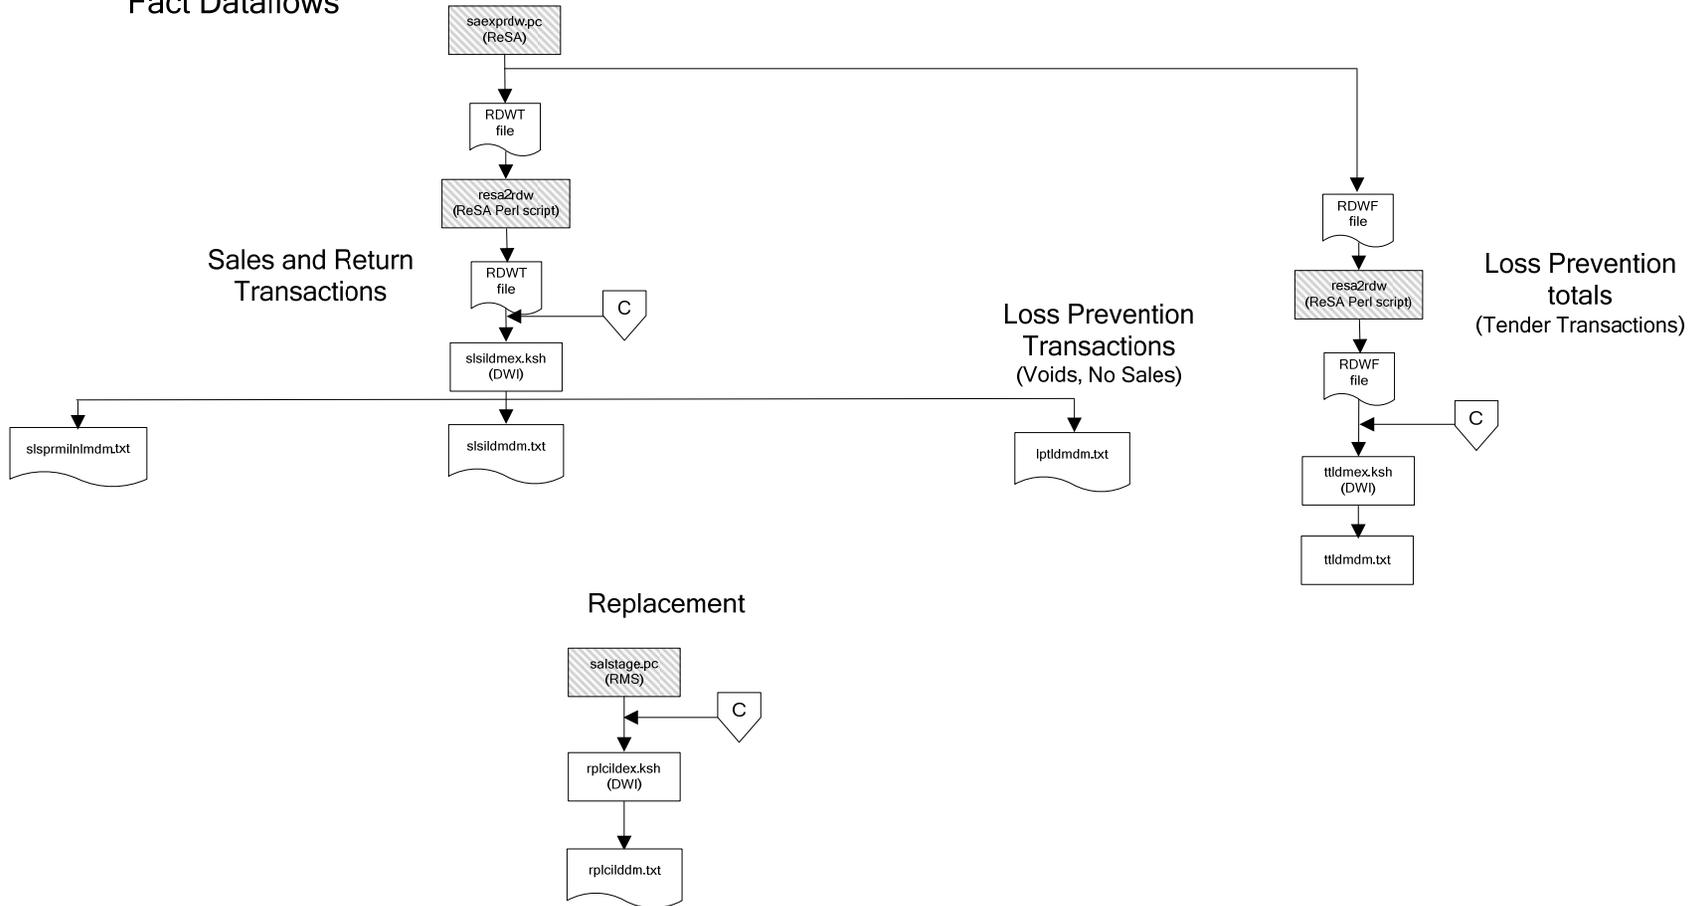


Fact Dataflows

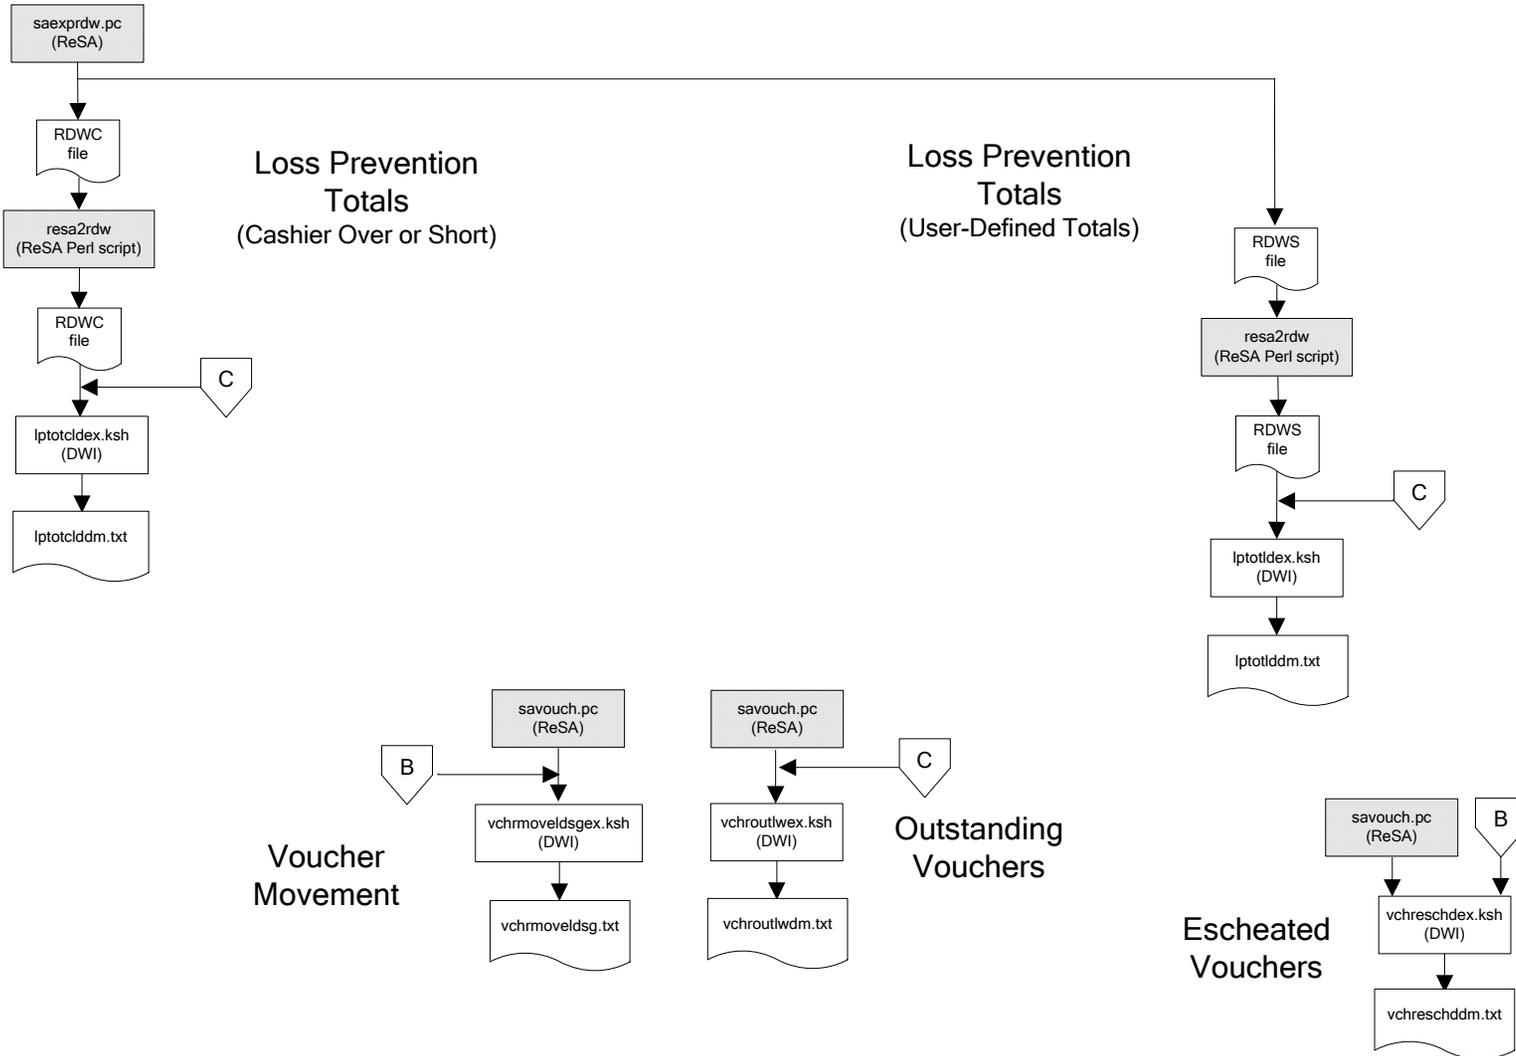

Fact Dataflows

Supplier Compliance

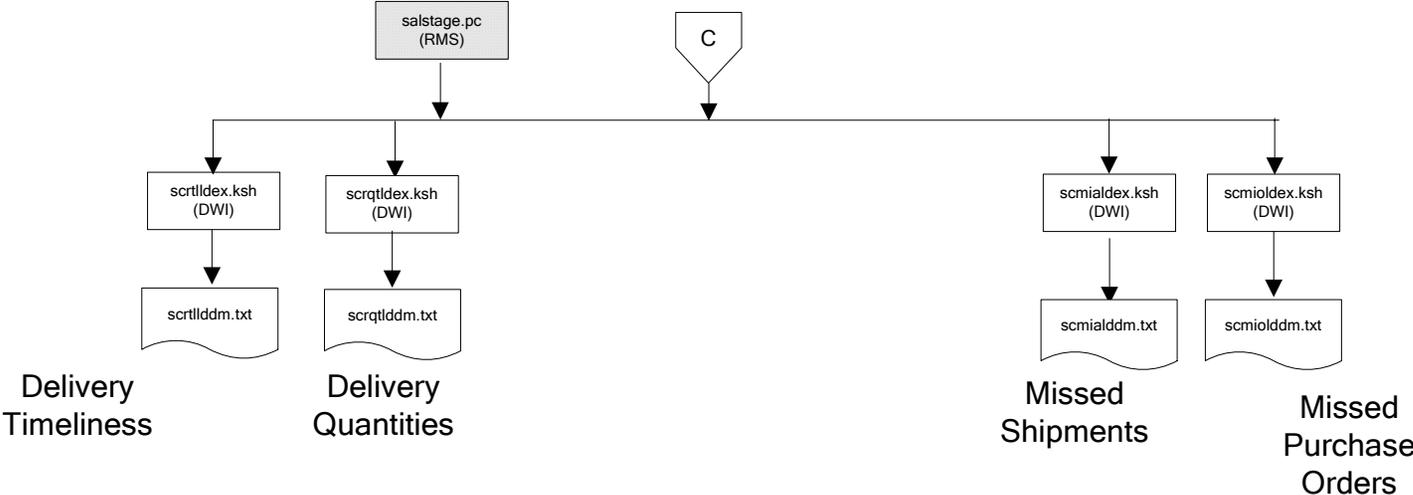


Interface Diagram for RPM and RDW

This following program flow diagram shows the RETL extraction program that extracts the Promotion dimension from RPM through the Data Warehouse Interface (DWI). The diagram shows the output files and the scripts that interface with the source. Note that the outputs are based on the logic (dimension data and table data) of Oracle Retail Data Warehouse (RDW), but you can use the data to suit your business needs.


For detailed information about dimensions and facts, see the *Oracle Retail Data Warehouse Operations Guide*.


See the *Oracle Retail Merchandising System Operations Guide Volume 1—Batch Overviews and Designs* for more information about the modules shown in the following diagram.

Legend



Program Flow Diagram

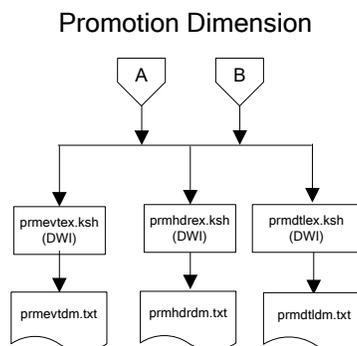

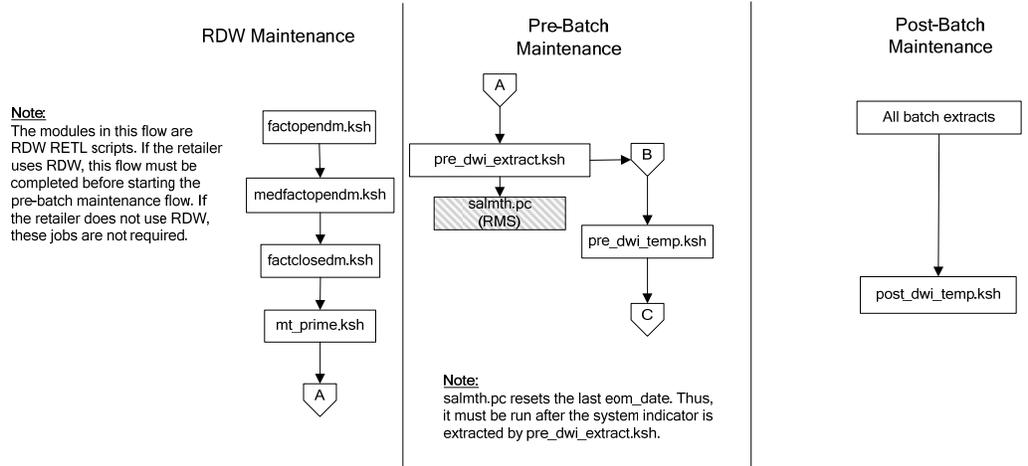


Interface Diagram for ReIM and RDW

This following program flow diagram shows the RETL extraction program that extracts the Promotion dimension from ReIM through the Data Warehouse Interface (DWI). The diagram shows the output files and the scripts that interface with the source. Note that the outputs are based on the logic (dimension data and table data) of Oracle Retail Data Warehouse (RDW), but you can use the data to suit your business needs.

For detailed information about dimensions and facts, see the *Oracle Retail Data Warehouse Operations Guide*.


See the *Oracle Retail Merchandising System Operations Guide Volume 1—Batch Overviews and Designs* for more information about the modules shown in the following diagram.


Legend

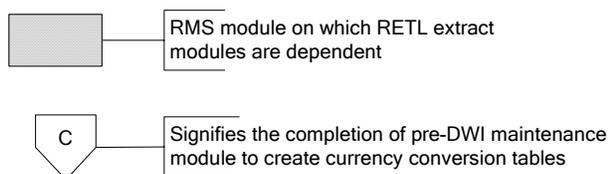

Program Flow Diagram

Supplier Invoice Cost

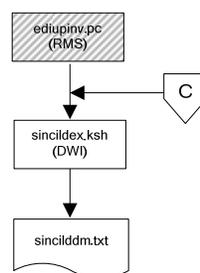

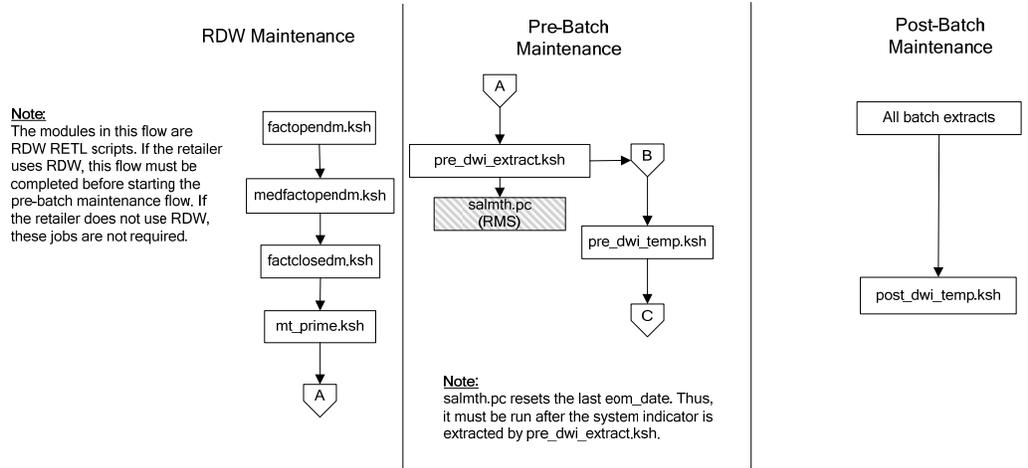


Interface Diagrams for RMS and AIP

This chapter presents flow diagrams for RETL extract data processing from RMS to AIP. The RMS program or output file is illustrated, along with the program or process that interfaces with the source. The diagrams illustrate the flow of the data after initial interface processing of the source.


Before setting up a program schedule, familiarize yourself with the functional and technical constraints associated with each program. See the *Oracle Retail Merchandising System Operations Guide Volume 1—Batch Overviews and Designs* for more information about the modules shown in the following diagrams.

RMS Pre/Post Extract Diagrams

RMS Pre RETL Extract Maintenance

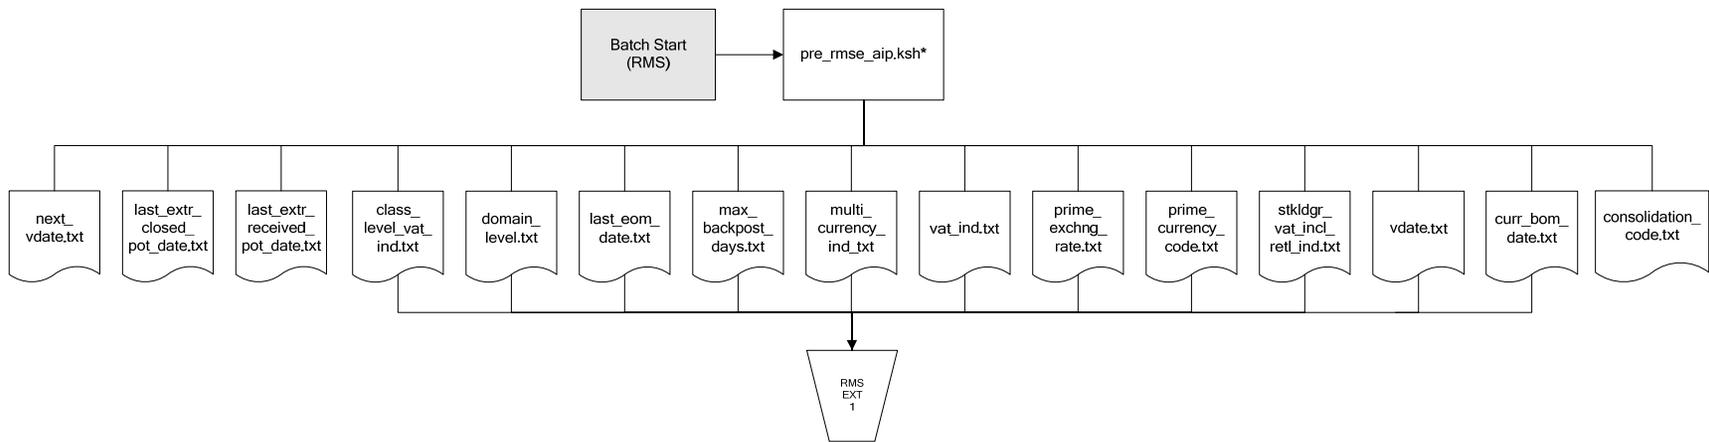


RMS Foundation Data Extract Diagrams

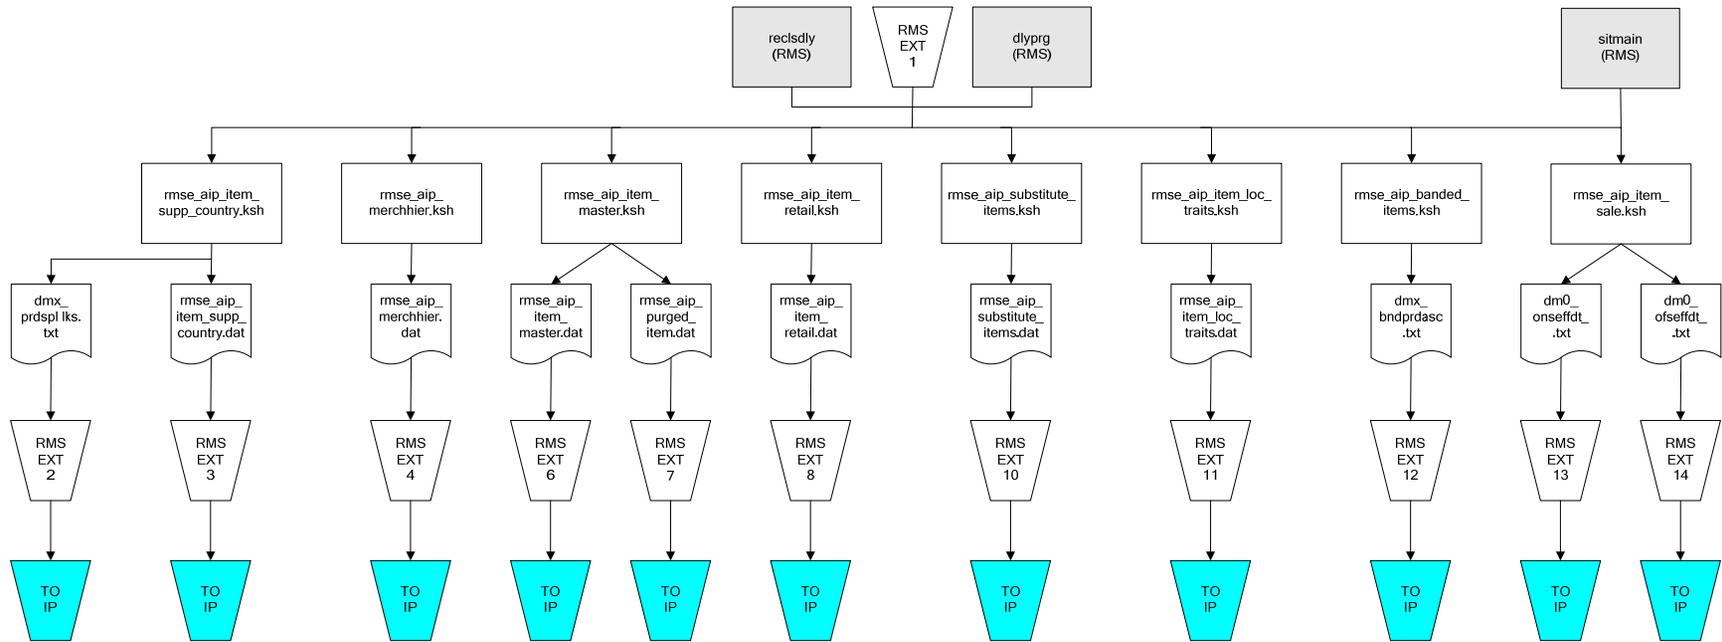


IP = Time-phased inventory planning tool


Organization Hierarchy for IP

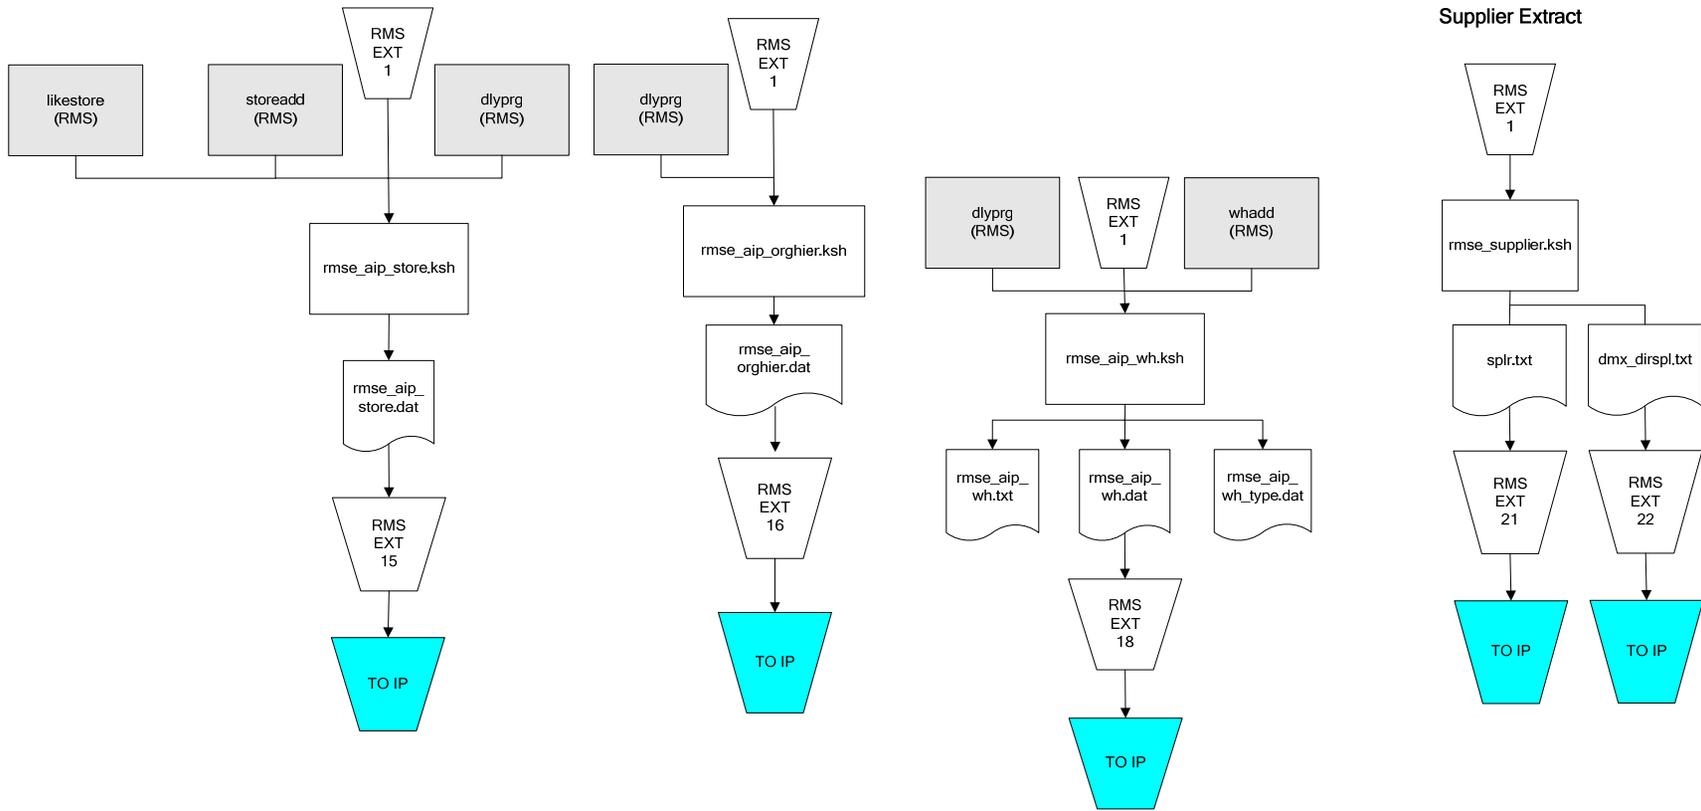


IP = Time-phased inventory planning tool

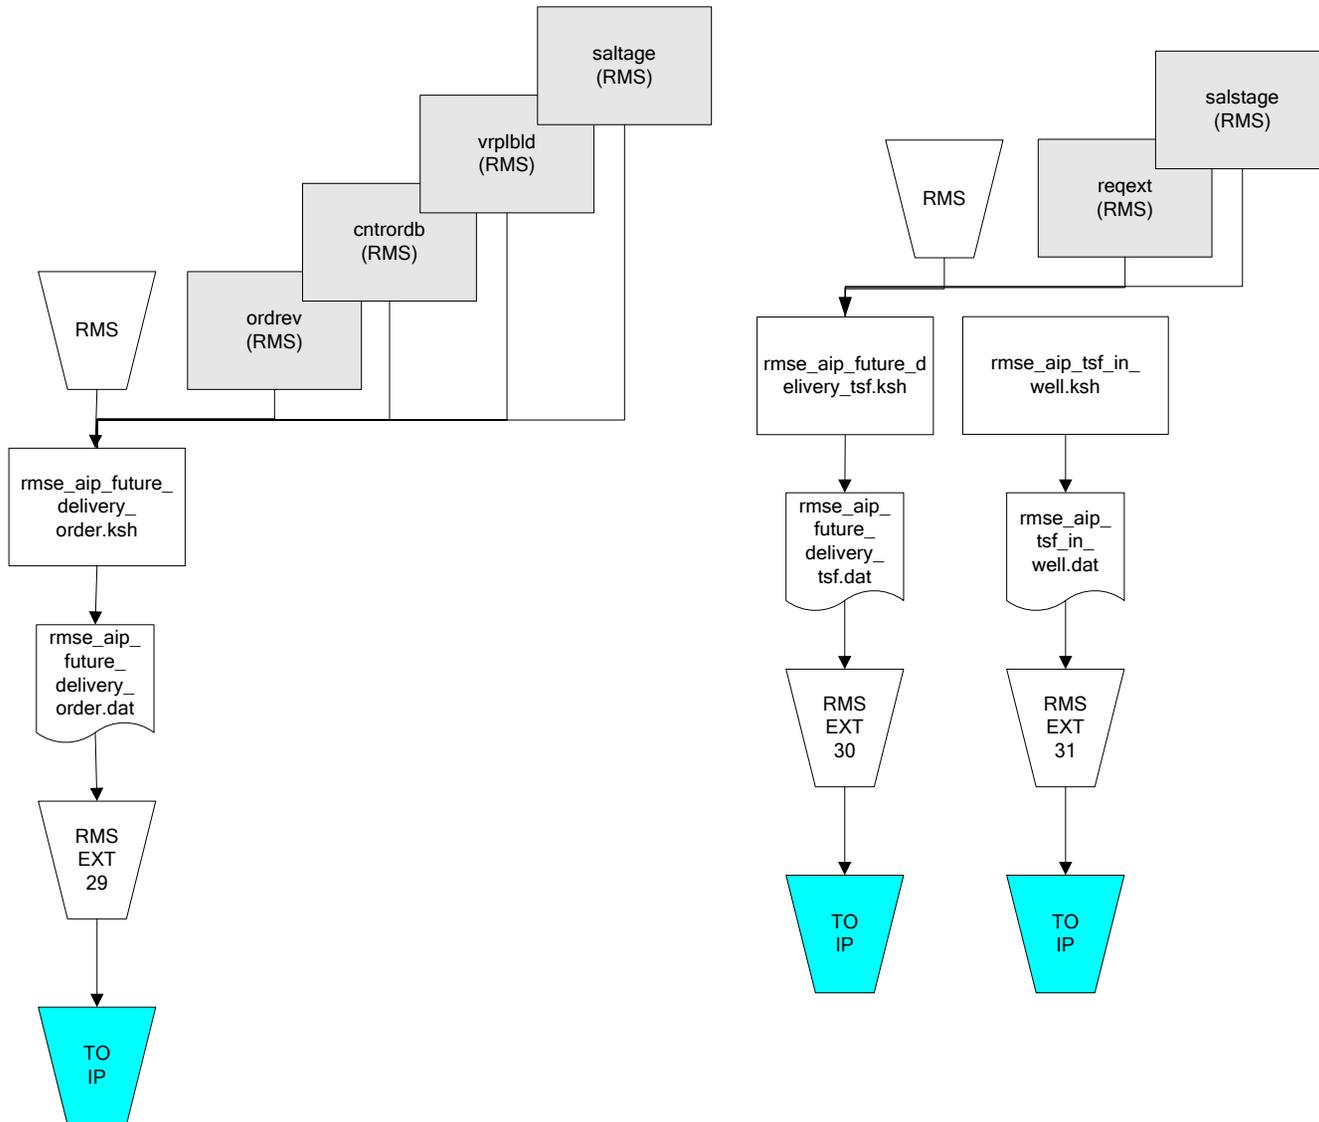

IP = Time-phased inventory planning tool

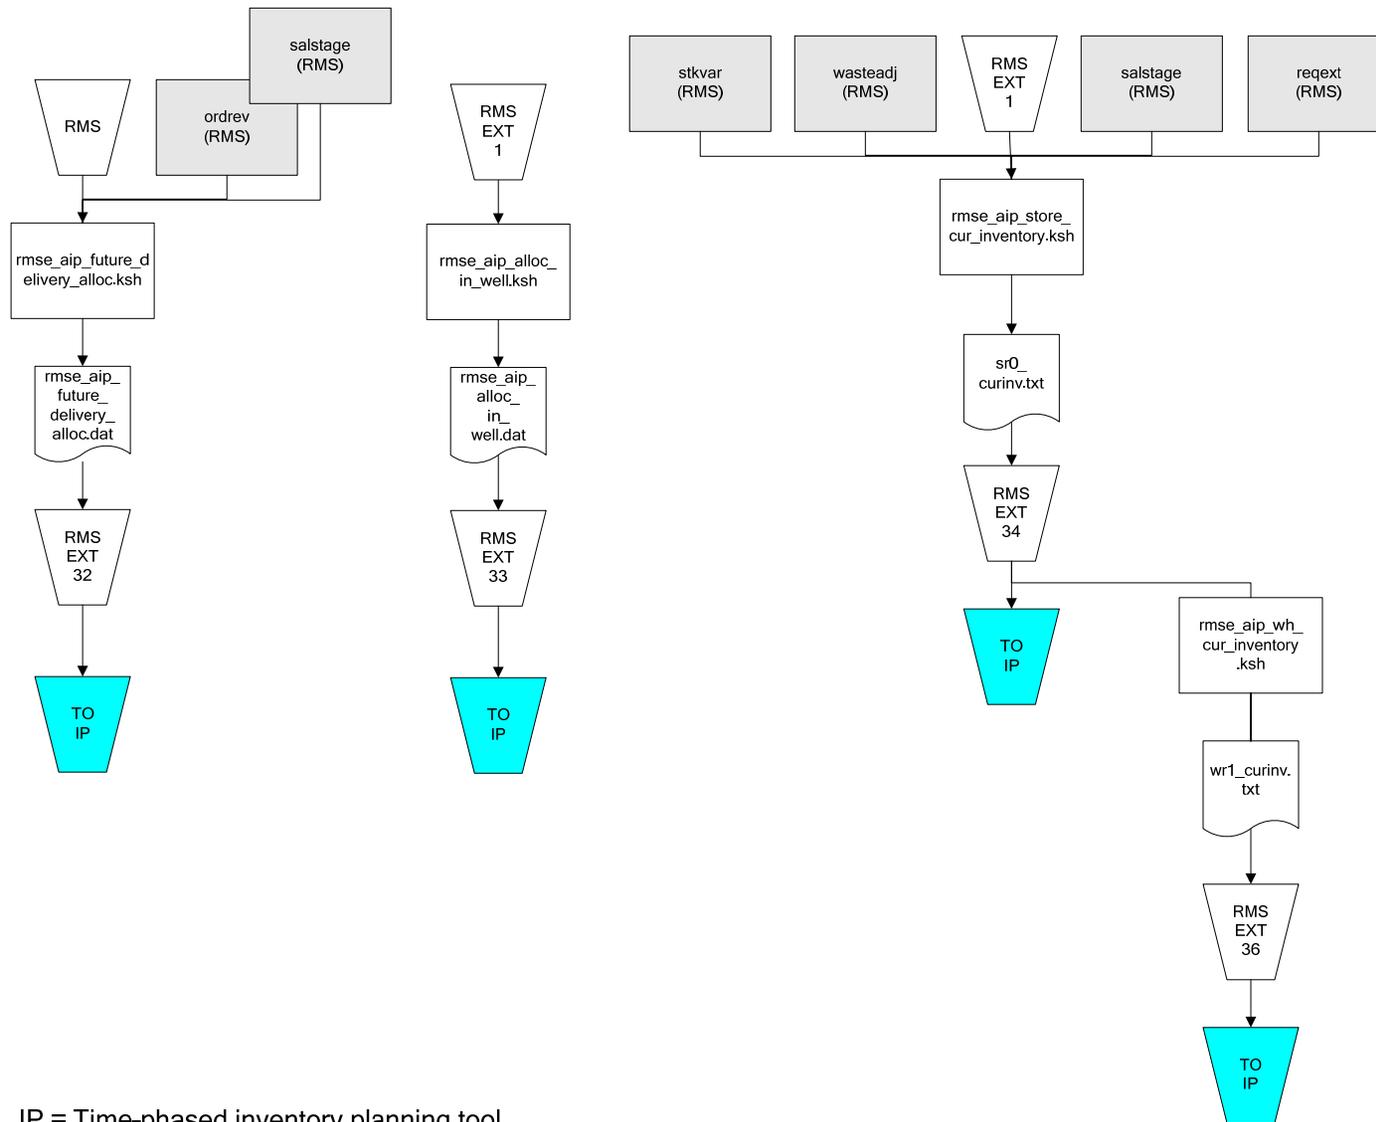

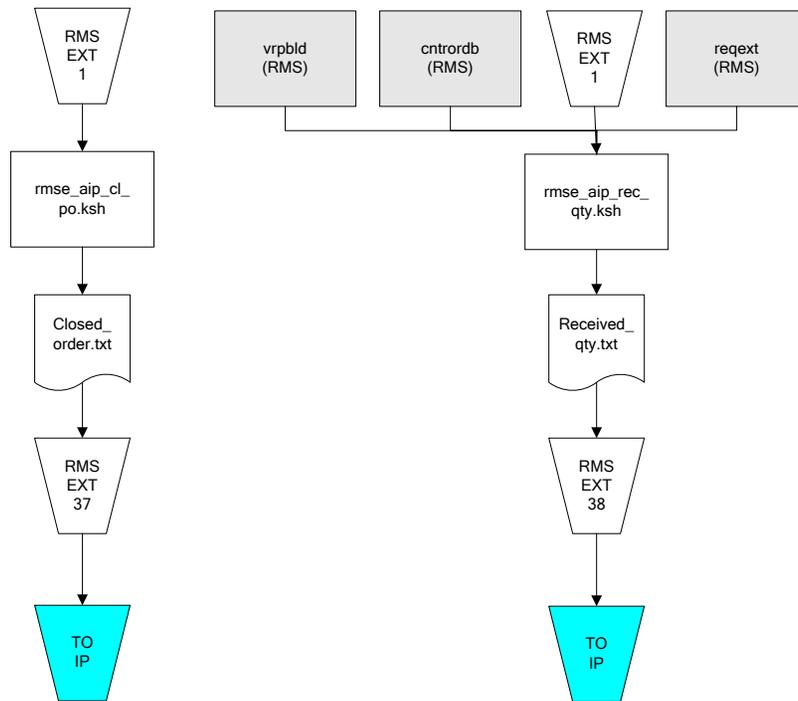

IP = Time-phased inventory planning tool