

Oracle® Retail Invoice Matching

Installation Guide

Release 14.1.1

E63185-01

May 2015

Copyright © 2015, Oracle. All rights reserved.

Primary Author: Wade Schwarz

Contributors: Nathan Young, Sahithya Sreenath and Kelly Baranick

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Value-Added Reseller (VAR) Language

Oracle Retail VAR Applications

The following restrictions and provisions only apply to the programs referred to in this section and licensed to you. You acknowledge that the programs may contain third party software (VAR applications) licensed to Oracle. Depending upon your product and its version number, the VAR applications may include:

- (i) the **MicroStrategy** Components developed and licensed by MicroStrategy Services Corporation (MicroStrategy) of McLean, Virginia to Oracle and imbedded in the MicroStrategy for Oracle Retail Data Warehouse and MicroStrategy for Oracle Retail Planning & Optimization applications.
- (ii) the **Wavelink** component developed and licensed by Wavelink Corporation (Wavelink) of Kirkland, Washington, to Oracle and imbedded in Oracle Retail Mobile Store Inventory Management.
- (iii) the software component known as **Access Via**™ licensed by Access Via of Seattle, Washington, and imbedded in Oracle Retail Signs and Oracle Retail Labels and Tags.
- (iv) the software component known as **Adobe Flex**™ licensed by Adobe Systems Incorporated of San Jose, California, and imbedded in Oracle Retail Promotion Planning & Optimization application.

You acknowledge and confirm that Oracle grants you use of only the object code of the VAR Applications. Oracle will not deliver source code to the VAR Applications to you. Notwithstanding any other term or condition of the agreement and this ordering document, you shall not cause or permit alteration of any VAR Applications. For purposes of this section, "alteration" refers to all alterations, translations, upgrades, enhancements, customizations or modifications of all or any portion of the VAR Applications including all reconfigurations, reassembly or reverse assembly, re-engineering or reverse engineering and recompilations or reverse compilations of the VAR Applications or any derivatives of the VAR Applications. You acknowledge that it shall be a breach of the agreement to utilize the relationship, and/or confidential information of the VAR Applications for purposes of competitive discovery.

The VAR Applications contain trade secrets of Oracle and Oracle's licensors and Customer shall not attempt, cause, or permit the alteration, decompilation, reverse engineering, disassembly or other reduction of the VAR Applications to a human perceivable form. Oracle reserves the right to replace, with functional equivalent software, any of the VAR Applications in future releases of the applicable program.

Contents

Send Us Your Comments	ix
Preface	xi
Audience	xi
Related Documents	xi
Customer Support	xi
Review Patch Documentation	xi
Improved Process for Oracle Retail Documentation Corrections	xii
Oracle Retail Documentation on the Oracle Technology Network	xii
Conventions	xii
1 Preinstallation Tasks	1
Check for the Current Version of the Installation Guide	1
Check Supported Database Server Requirements	2
Check Supported Application Server Requirements	3
Verify Single Sign-On	3
Check Supported Client PC and Web Browser Requirements	4
Configure Mozilla Firefox 31.0	4
Supported Oracle Retail Products	4
UNIX User Account Privileges to Install the Software	4
Supported Oracle Applications	5
2 RAC and Clustering	7
3 Database Installation Tasks	9
4 Application Installation Tasks	11
Create WebLogic Domain	11
Start Node Manager	21
Start the Managed Server	21
Expand the ReIM Application Distribution	21
Clustered Installations– Preinstallation Steps	22
Configure LDAP authentication Preinstallation Steps (Initial Login to ReIM)	23
Create the preferredCountry Attribute, Object Class and User	38
Run the ReIM Application Installer	40
Resolving Errors Encountered During Application Installation	41
Clustered Installations – Post-Installation Steps	41
Installing the REIM BI Publisher Templates	41
Backups Created by Installer	42
Test the ReIM Application	42
reim.properties	42
integration.properties	42
ReIM Batch Scripts	43
Online Help	44

Single Sign-On	44
Adding New Users To ReIM – Manually (after ReIM has been installed)	44
5 Configuring BIPublisher for REIM.....	47
Configuring the RMS JDBC connection.....	54
6 Data Migration	57
Usage	57
Parameters	57
Error and Restart.....	57
Locking	58
7 Patching Procedures	59
Oracle Retail Patching Process	59
Supported Products and Technologies	59
Patch Concepts	60
Patching Utility Overview	61
Changes with 14.1.....	61
Patching Considerations	62
Patch Types.....	62
Incremental Patch Structure	62
Version Tracking.....	62
Apply all Patches with Installer or ORPatch.....	63
Environment Configuration	63
Retained Installation Files.....	63
Reloading Content	63
Java Hotfixes and Cumulative Patches	64
Backups	64
Disk Space.....	64
Patching Operations	65
Running ORPatch	65
Merging Patches.....	75
Compiling Application Components	76
Deploying Application Components	78
Maintenance Considerations	79
Database Password Changes.....	79
WebLogic Password Changes.....	80
Infrastructure Directory Changes.....	81
DBManifest Table.....	81
RETAIL_HOME relationship to Database and Application Server.....	81
Jar Signing Configuration Maintenance	81
Customization	83
Patching Considerations with Customized Files and Objects	83
Registering Customized Files.....	84
Custom Compiled Java Code.....	86

Extending Oracle Retail Patch Assistant with Custom Hooks	88
Troubleshooting Patching.....	92
ORPatch Log Files.....	92
Restarting ORPatch.....	92
Manual DBManifest Updates.....	92
Manual Restart State File Updates	94
DISPLAY Settings When Compiling Forms.....	94
JAVA_HOME Setting	94
Patching Prior to First Install.....	94
Providing Metadata to Oracle Support.....	95
A Appendix: ReIM Application Installer Screens	97
B Appendix: Single Sign-On for WebLogic	121
What Do I Need for Single Sign-On?	121
Can Oracle Access Manager Work with Other SSO Implementations?	121
Oracle Single Sign-on Terms and Definitions	122
What Single Sign-On is not.....	123
How Oracle Single Sign-On Works	123
Installation Overview	125
User Management.....	125
C Appendix: URL Reference	127
JDBC URL for a Database	127
D Appendix: Common Installation Errors.....	129
ConcurrentModificationException in Installer GUI.....	129
Warning: Could not find X Input Context.....	129
GUI screens fail to open when running Installer.....	129
Hostname Verification Error when SSL is used.....	130
E Appendix: Setting Up Password Stores with wallets/credential stores.....	131
About Database Password Stores and Oracle Wallet	131
Setting Up Password Stores for Database User Accounts.....	132
Setting up Wallets for Database User Accounts	133
For RMS, RWMS, RPM Batch using sqlplus or sqlldr, RETL, RMS, RWMS, and ARI	133
Setting up RETL Wallets	135
For Java Applications (SIM, ReIM, RPM, RIB, AIP, Alloc, ReSA, RETL).....	136
How does the Wallet Relate to the Application?	139
How does the Wallet Relate to Java Batch Program use?.....	139
Database Credential Store Administration.....	139
Managing Credentials with WSLT/OPSS Scripts	143
listCred	144
updateCred	145
createCred	145
deleteCred.....	145

modifyBootStrapCredential	146
addBootStrapCredential	147
Quick Guide for Retail Password Stores (db wallet, java wallet, DB credential stores)	
.....	149
F Appendix: Installation Order	159
Enterprise Installation Order.....	159

Send Us Your Comments

Oracle Retail Invoice Matching, Installation Guide, Release 14.1.1

Oracle welcomes customers' comments and suggestions on the quality and usefulness of this document.

Your feedback is important, and helps us to best meet your needs as a user of our products. For example:

- Are the implementation steps correct and complete?
- Did you understand the context of the procedures?
- Did you find any errors in the information?
- Does the structure of the information help you with your tasks?
- Do you need different information or graphics? If so, where, and in what format?
- Are the examples correct? Do you need more examples?

If you find any errors or have any other suggestions for improvement, then please tell us your name, the name of the company who has licensed our products, the title and part number of the documentation and the chapter, section, and page number (if available).

Note: Before sending us your comments, you might like to check that you have the latest version of the document and if any concerns are already addressed. To do this, access the new Applications Release Online Documentation CD available on My Oracle Support and www.oracle.com. It contains the most current Documentation Library plus all documents revised or released recently.

Send your comments to us using the electronic mail address: retail-doc_us@oracle.com

Please give your name, address, electronic mail address, and telephone number (optional).

If you need assistance with Oracle software, then please contact your support representative or Oracle Support Services.

If you require training or instruction in using Oracle software, then please contact your Oracle local office and inquire about our Oracle University offerings. A list of Oracle offices is available on our Web site at www.oracle.com.

Preface

Oracle Retail Installation Guides contain the requirements and procedures that are necessary for the retailer to install Oracle Retail products.

Audience

This Installation Guide is written for the following audiences:

- Database administrators (DBA)
- System analysts and designers
- Integrators and implementation staff

Related Documents

For more information, see the following documents in the Oracle Retail Invoice Matching Release 14.1.1 documentation set:

- *Oracle Retail Invoice Matching Release Notes*
- *Oracle Retail Merchandising Implementation Guide*
- *Oracle Retail Merchandising Batch Schedule*
- *Oracle Retail Merchandising Security Guide*

Customer Support

To contact Oracle Customer Support, access My Oracle Support at the following URL:
<https://support.oracle.com>

When contacting Customer Support, please provide the following:

- Product version and program/module name
- Functional and technical description of the problem (include business impact)
- Detailed step-by-step instructions to re-create
- Exact error message received
- Screen shots of each step you take

Review Patch Documentation

When you install the application for the first time, you install either a base release (for example, 14.1) or a later patch release (for example, 14.1.1). If you are installing the base release or additional patch releases, read the documentation for all releases that have occurred since the base release before you begin installation. Documentation for patch releases can contain critical information related to the base release, as well as information about code changes since the base release.

Improved Process for Oracle Retail Documentation Corrections

To more quickly address critical corrections to Oracle Retail documentation content, Oracle Retail documentation may be republished whenever a critical correction is needed. For critical corrections, the republication of an Oracle Retail document may at times **not** be attached to a numbered software release; instead, the Oracle Retail document will simply be replaced on the Oracle Technology Network Web site, or, in the case of Data Models, to the applicable My Oracle Support Documentation container where they reside.

This process will prevent delays in making critical corrections available to customers. For the customer, it means that before you begin installation, you must verify that you have the most recent version of the Oracle Retail documentation set. Oracle Retail documentation is available on the Oracle Technology Network at the following URL:

<http://www.oracle.com/technetwork/documentation/oracle-retail-100266.html>

An updated version of the applicable Oracle Retail document is indicated by Oracle part number, as well as print date (month and year). An updated version uses the same part number, with a higher-numbered suffix. For example, part number E123456-02 is an updated version of a document with part number E123456-01.

If a more recent version of a document is available, that version supersedes all previous versions.

Oracle Retail Documentation on the Oracle Technology Network

Oracle Retail product documentation is available on the following web site:

<http://www.oracle.com/technetwork/documentation/oracle-retail-100266.html>

(Data Model documents are not available through Oracle Technology Network. You can obtain them through My Oracle Support.)

Conventions

Navigate: This is a navigate statement. It tells you how to get to the start of the procedure and ends with a screen shot of the starting point and the statement “the Window Name window opens.”

This is a code sample

It is used to display examples of code

Preinstallation Tasks

This chapter explains the tasks required prior to installation.

Check for the Current Version of the Installation Guide

Corrected versions of Oracle Retail installation guides may be published whenever critical corrections are required. For critical corrections, the rerelease of an installation guide may not be attached to a release; the document will simply be replaced on the Oracle Technology Network Web site.

Before you begin installation, check to be sure that you have the most recent version of this installation guide. Oracle Retail installation guides are available on the Oracle Technology Network at the following URL:

<http://www.oracle.com/technetwork/documentation/oracle-retail-100266.html>

An updated version of an installation guide is indicated by part number, as well as print date (month and year). An updated version uses the same part number, with a higher-numbered suffix. For example, part number E123456-02 is an updated version of an installation guide with part number E123456-01.

If a more recent version of this installation guide is available, that version supersedes all previous versions. Only use the newest version for your installation.

Check Supported Database Server Requirements

General requirements for a database server running Oracle Retail Invoice Matching include:

Supported on:	Versions Supported:
Database Server OS	OS certified with Oracle Database 12cR1 Enterprise Edition. Options are: ▪ Oracle Linux 6 for x86-64 (Actual hardware or Oracle virtual machine). ▪ Red Hat Enterprise Linux 6 for x86-64 (Actual hardware or Oracle virtual machine). ▪ AIX 7.1 (Actual hardware or LPARs) ▪ Solaris 11 SPARC (Actual hardware or logical domains) ▪ HP-UX 11.31 Integrity (Actual hardware, HPVM, or vPars)
Database Server 12cR1	Oracle Database Enterprise Edition 12cR1 (12.1.0.2) with the following specifications: Components: ▪ Oracle Partitioning ▪ Examples CD Oneoffs: ▪ Patch 19623450: MISSING JAVA CLASSES AFTER UPGRADE TO JDK 7 Other components: ▪ Perl interpreter 5.0 or later ▪ X-Windows interface ▪ JDK1.7

Note: By default, JDK is at 1.6. After installing the rdbms binary, apply patch 19623450. Then follow the instructions on Oracle Database Java Developer's Guide 12c Release 1 to change JDK to 1.7. The document is available at:

<http://docs.oracle.com/database/121/JJDEV/chone.htm#JJDEV01000>

Check Supported Application Server Requirements

General requirements for an application server capable of running the Oracle Retail Invoice Matching application include the following:

Supported on:	Versions Supported:
Application Server OS	OS certified with Oracle Fusion Middleware 11g Release 1 (11.1.1.7). Options are: - Oracle Linux 6 for x86-64 (Actual hardware or Oracle virtual machine) - Red Hat Enterprise Linux 6 for x86-64 (Actual hardware or Oracle virtual machine) - AIX 7.1 (Actual hardware or LPARs) - Solaris 11 SPARC (Actual hardware or logical domains) - HP-UX 11.31 Integrity (Actual hardware, HPVM, or vPars)
Application Server	Oracle Fusion Middleware 11g Release 1 (11.1.1.7) Components: - Oracle WebLogic Server 11g Release 1 (10.3.6) - Repository Creation Utility (RCU 11.1.1.7) - Oracle ADF 11g Release 2 (11.1.1.7) - Oracle Identity Management 11g Release 1 (11.1.1.7) - Note: Oracle Internet Directory (OID) is the supported LDAP directory for Oracle Retail products. For alternate LDAP directories, refer to Oracle WebLogic documentation set. Java: - JDK 1.7+ 64 bit IMPORTANT: If there is an existing WebLogic installation on the server, you must upgrade it to WebLogic 10.3.6. All middleware components associated with WebLogic server should be upgraded to 11.1.1.7. Optional (required for SSO) - Oracle WebTier 11g (11.1.1.7) - Oracle Access Manager 11g Release 2 (11.1.2.2) Note: A separate WebLogic 10.3.6 installation is required for Oracle Access Manager 11g. - Oracle Access Manager Agent (WebGate) 11g Release 2 (11.1.2.2) - Oracle BI Publisher 11g(11.1.1.7)

Verify Single Sign-On

If ReIM will not be deployed in a Single Sign-On environment, skip this section.

If Single Sign-On is to be used, verify the Oracle Identity Management 11gR1 version 11.1.1.7 has been installed along with the components listed in the above Application Server requirements section. Verify if the Oracle WebTier Server is registered with the Oracle Access Manager 11gR2 as a partner application with Webgate.

Check Supported Client PC and Web Browser Requirements

Requirement	Version
Operating system	Windows 7,8
Display resolution	1024x768 or higher
Processor	2.6GHz or higher
Memory	1GByte or higher
Networking	intranet with at least 10Mbps data rate
Oracle (Sun) Java Runtime Environment	1.7.0+
Browser	Microsoft Internet Explorer 11 Mozilla Firefox 31

Configure Mozilla Firefox 31.0

If you are using Firefox 31.0, you need to configure the browser to display the list of values pop ups correctly.

1. Open your Firefox browser and type in your address bar as follows:
about:config
2. A warning dialog is displayed. Accept the warning.
A list of configuration values is displayed.
3. Locate the browser.link.open_newwindow property, right-click on it, and select Modify.
4. Change the value to 2.
5. Close and re-start the browser.

Supported Oracle Retail Products

Requirement	Version
Oracle Retail Merchandising System (RMS)/Oracle Retail Trade Management (RTM)/Oracle Retail Sales Audit (ReSA)	14.1.1
Oracle Retail Store Inventory Management (SIM) (by way of RMS)	14.1.1
Oracle Retail Analytics	14.1.1

UNIX User Account Privileges to Install the Software

A UNIX user account is needed to install the software. The UNIX user that is used to install the software should have write access to the WebLogic server installation files.

For example, oretail.

Note: Installation steps will fail when trying to modify files under the WebLogic installation, unless the user has write access.

Supported Oracle Applications

Requirement	Version
Oracle E-Business Suite (Accounts Payable)	Oracle E-Business Suite 12.1.3 integration is supported using the Retail Financial Integration 14.1.1 for Oracle Retail Merchandising Suite and Oracle E-Business Suite Financials. See the <i>RFI installation and upgrade Guide</i> for specific version information.
Oracle PeopleSoft Financials	Oracle PeopleSoft Financials 9.2, integration is supported using the Oracle Retail Financial Integration for Oracle Retail Merchandising Suite and Oracle PeopleSoft Financials. See the <i>Oracle Retail Financial Integration for Oracle Retail Merchandise Operations Management and Oracle E-Business Suite or PeopleSoft Financials</i> for specific version information.

RAC and Clustering

Oracle Retail Invoice Matching has been validated to run in two configurations on Linux:

Standalone WebLogic and Database installations

Real Application Cluster Database and WebLogic Server Clustering

The Oracle Retail products have been validated against a 12.1.0.2 RAC database. When using a RAC database, all JDBC connections should be configured to use THIN connections rather than OCI connections. It is suggested that if you do use OCI connections, the Oracle Retail products database be configured in the tnsnames.ora file used by the WebLogic Server installations.

Clustering for WebLogic Server 10.3.6 is managed as an Active-Active cluster accessed through a Load Balancer. Validation has been completed utilizing a RAC 12.1.0.2 Oracle Internet Directory database with the WebLogic 10.3.6 cluster. It is suggested that a Web Tier 11.1.1.7 installation be configured to reflect all application server installations if SSO will be utilized.

References for Configuration:

- Oracle® Fusion Middleware High Availability Guide 11g Release 1 (11.1.1) Part Number E10106-09
- Oracle Real Application Clusters Administration and Deployment Guide 12c Release 1 (12.1) E48838-08

Database Installation Tasks

The ReIM database objects are bundled with the RMS database schema installer. To install the ReIM database objects follow the *Oracle Retail Merchandising System Installation Guide* to run the database schema installer, and select the ReIM option on the product selection page.

Application Installation Tasks


Before proceeding, you must install Oracle WebLogic Server 11g Release 1 (10.3.6) and patches listed in the Chapter 1 of this document. The Oracle Retail Invoice Matching application is deployed to a WebLogic Managed server within the Web Logic installation. It is assumed that Oracle Database has already been configured and loaded with the appropriate RMS and Oracle Retail Invoice Matching schemas for your installation.

Create WebLogic Domain


Perform the following procedure to create a domain. For example: REIMDomain

Note: It is recommended to use a separate domain for different Retail applications

1. Login to the application server. Go to `<WEBLOGIC_HOME>/wlserver_10.3/common/bin`.
2. Run the script, `config.sh`. The following screen pops up. Select **Create a new WebLogic domain** and click **Next**.

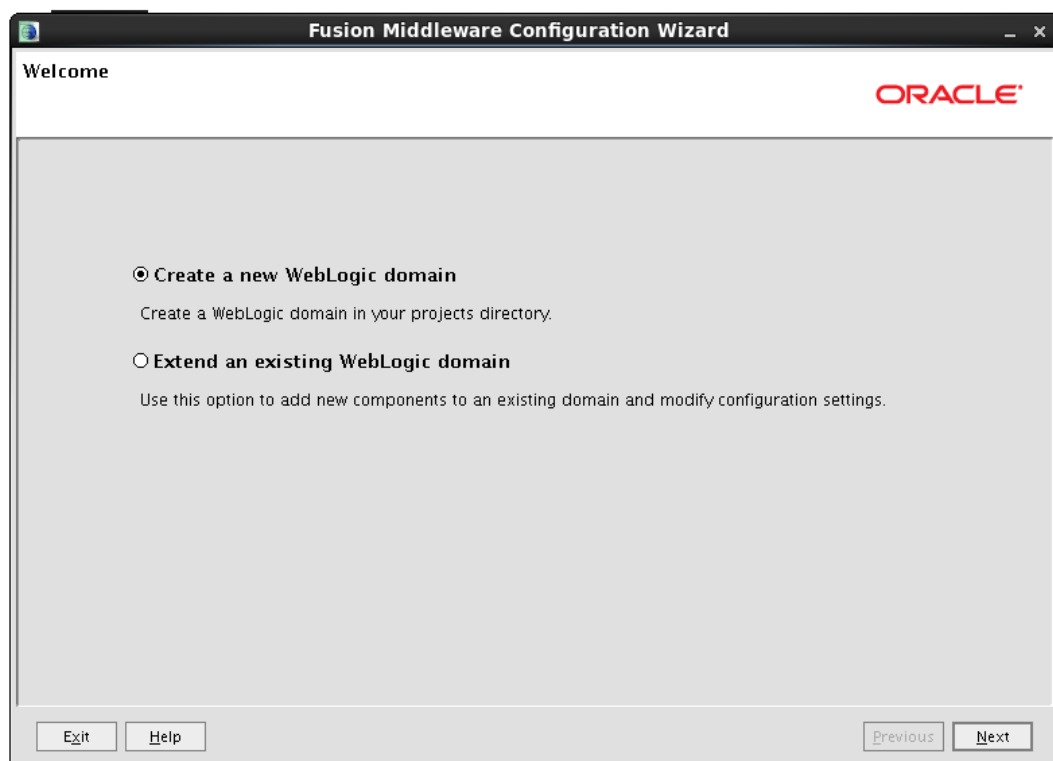


3. Select the **Generate a domain configured automatically to support the following products** option and click **Next**.

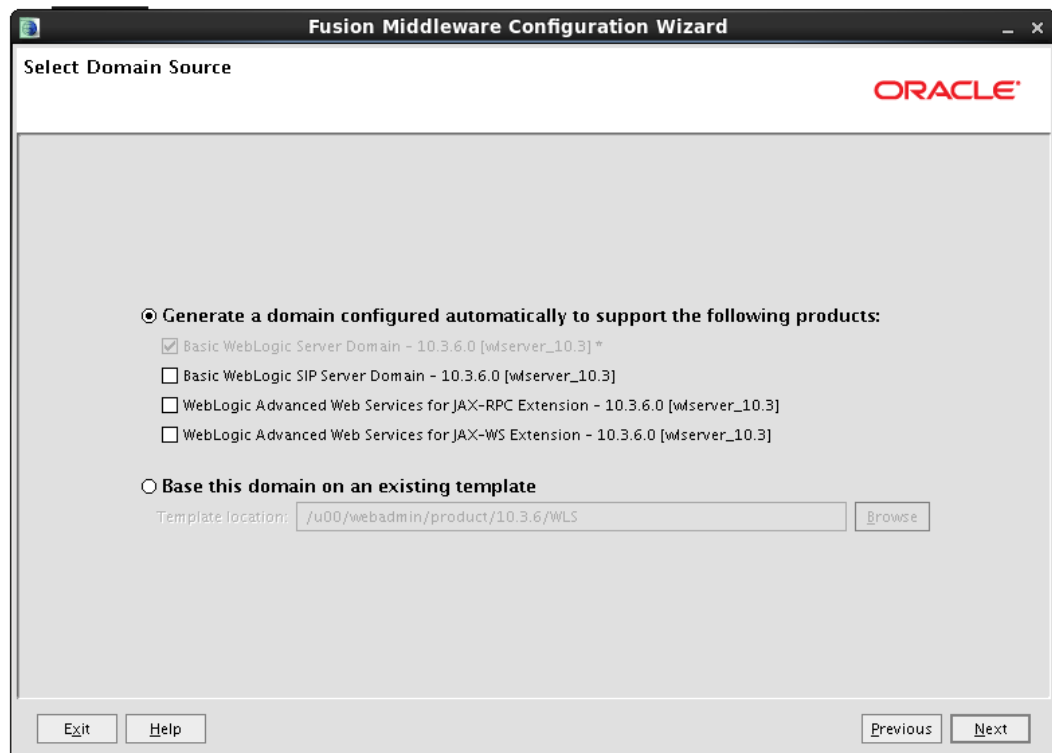

4. Enter the name of the domain (for example: REIMDomain) and the Domain Location. Click **Next**.




5. Set Administrator username and password and click **Next**.

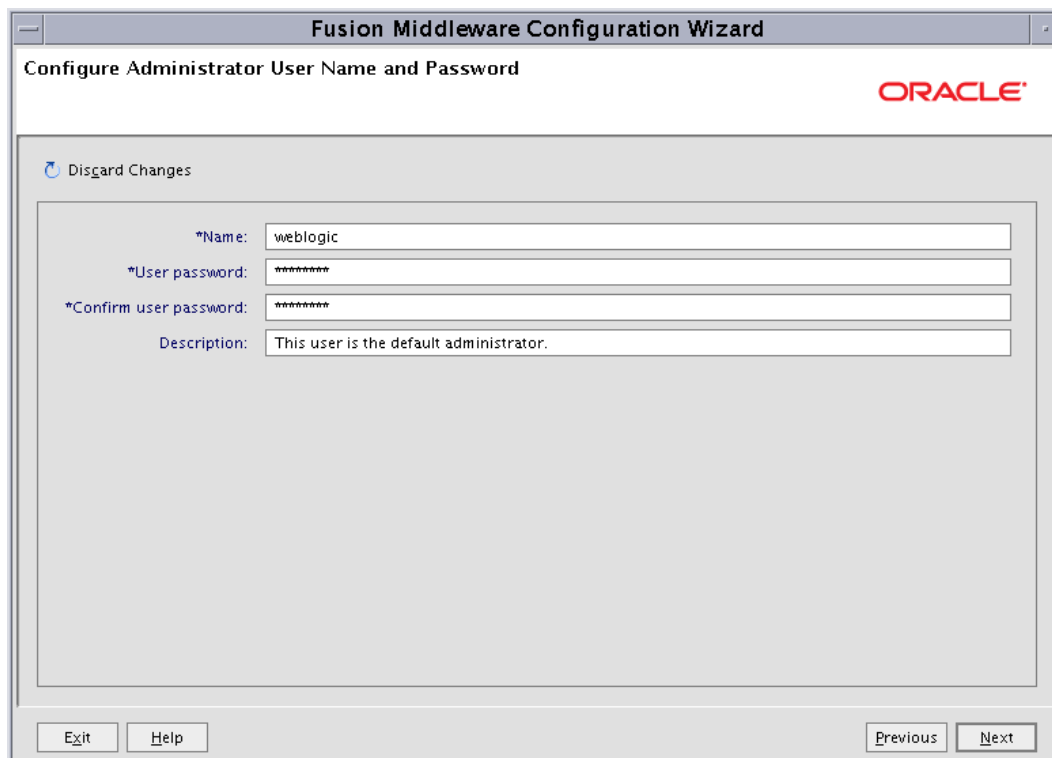


The screenshot shows the 'Fusion Middleware Configuration Wizard' window with the title 'Configure Administrator User Name and Password'. The Oracle logo is in the top right. A 'Disard Changes' link is in the top left. The main area contains four input fields: '*Name:' with 'weblogic', '*User password:' with '*****', '*Confirm user password:' with '*****', and 'Description:' with 'This user is the default administrator.'. At the bottom are 'Exit', 'Help', 'Previous', and 'Next' buttons.

6. It is recommended that you select **Production Mode**. Make sure that the location to JAVA 1.7+ is provided. Click **Next**.

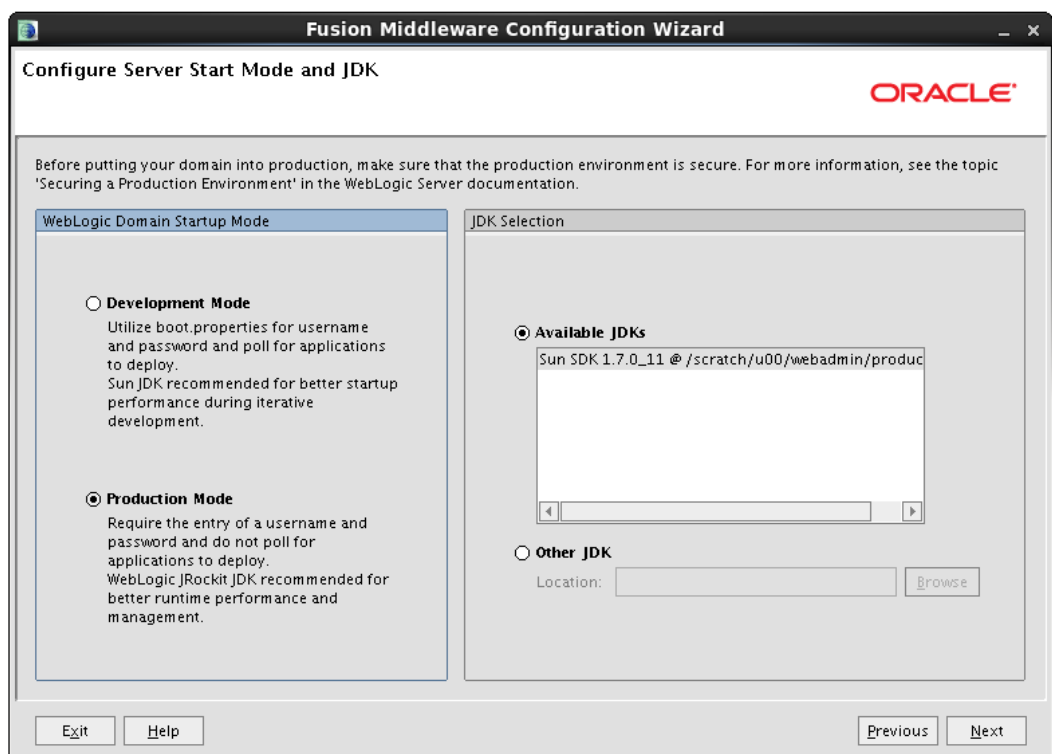


The screenshot shows the 'Fusion Middleware Configuration Wizard' window with the title 'Configure Server Start Mode and JDK'. The Oracle logo is in the top right. A warning message states: 'Before putting your domain into production, make sure that the production environment is secure. For more information, see the topic 'Securing a Production Environment' in the WebLogic Server documentation.' The window is divided into two panes. The left pane, 'WebLogic Domain Startup Mode', has two radio buttons: 'Development Mode' (unselected) and 'Production Mode' (selected). The right pane, 'JDK Selection', has two radio buttons: 'Available JDKs' (selected) and 'Other JDK' (unselected). Under 'Available JDKs', a list box shows 'Sun SDK 1.7.0_11 @ /scratch/u00/webadmin/produ'. Below the list box is a 'Browse' button. At the bottom are 'Exit', 'Help', 'Previous', and 'Next' buttons.


7. Select **Administration Server** and **Managed Servers, Clusters and Machines**. This allows you to adjust the AdminServer port as well as create the reim-server and nodemanager. Click **Next**.

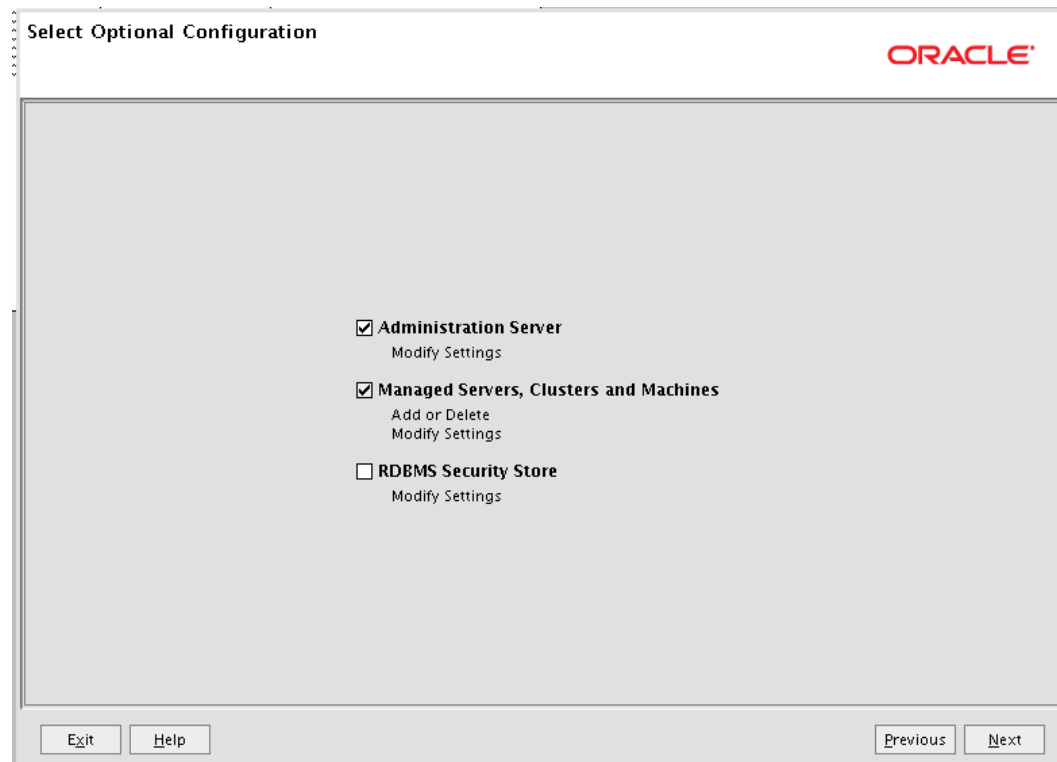

8. Provide a name for the Administration Server (for example: AdminServer) and a Listen port (for example: 15001). Click **Next**.

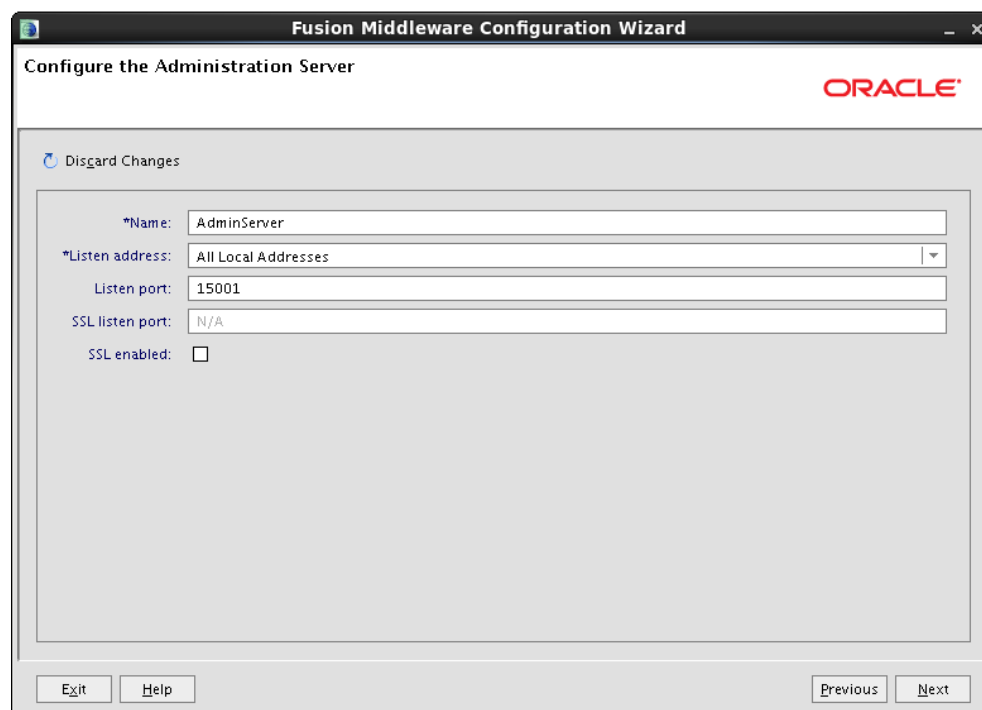


9. If you require an SSL setup of a domain, select **SSL enabled** and provide an SSL listen port (for example: 15002). Click **Next**.

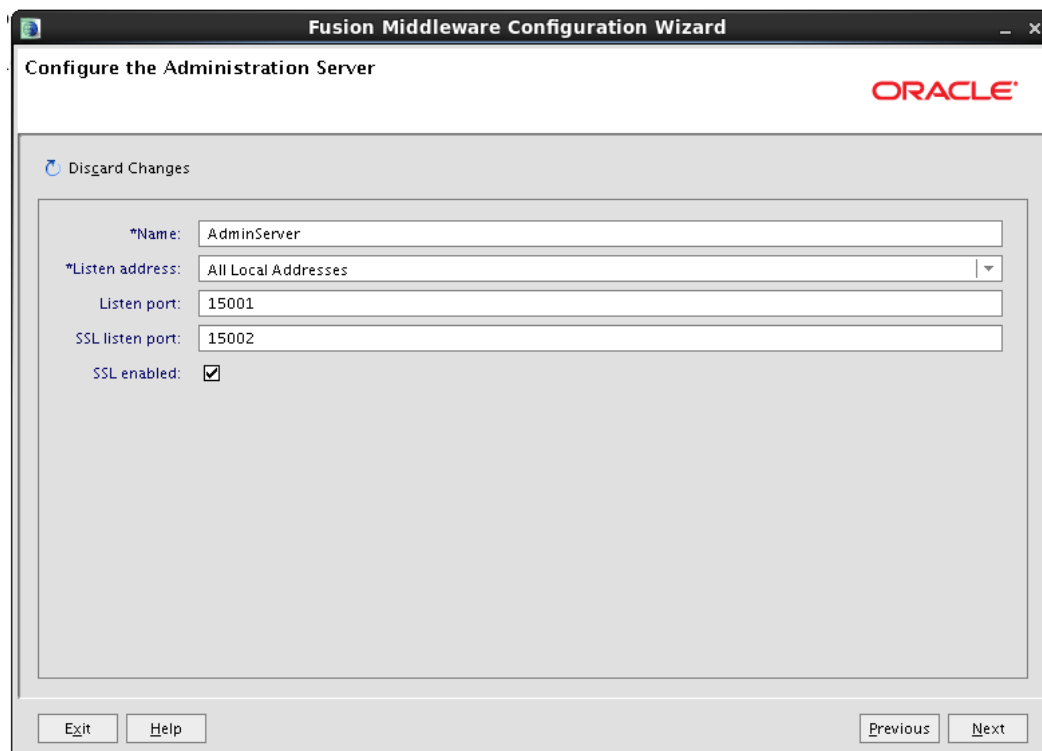

The screenshot shows the 'Configure the Administration Server' window of the Fusion Middleware Configuration Wizard. The window has a title bar with the Oracle logo and standard window controls. Below the title bar, there is a 'Disgard Changes' button. The main area contains several input fields: '*Name:' with the value 'AdminServer', '*Listen address:' with a dropdown menu showing 'All Local Addresses', 'Listen port:' with the value '15001', 'SSL listen port:' with the value '15002', and 'SSL enabled:' with a checked checkbox. At the bottom, there are buttons for 'Exit', 'Help', 'Previous', and 'Next'.

*Name:	AdminServer
*Listen address:	All Local Addresses
Listen port:	15001
SSL listen port:	15002
SSL enabled:	☒

10. This screen allows us to add managed servers. Click **Add**.

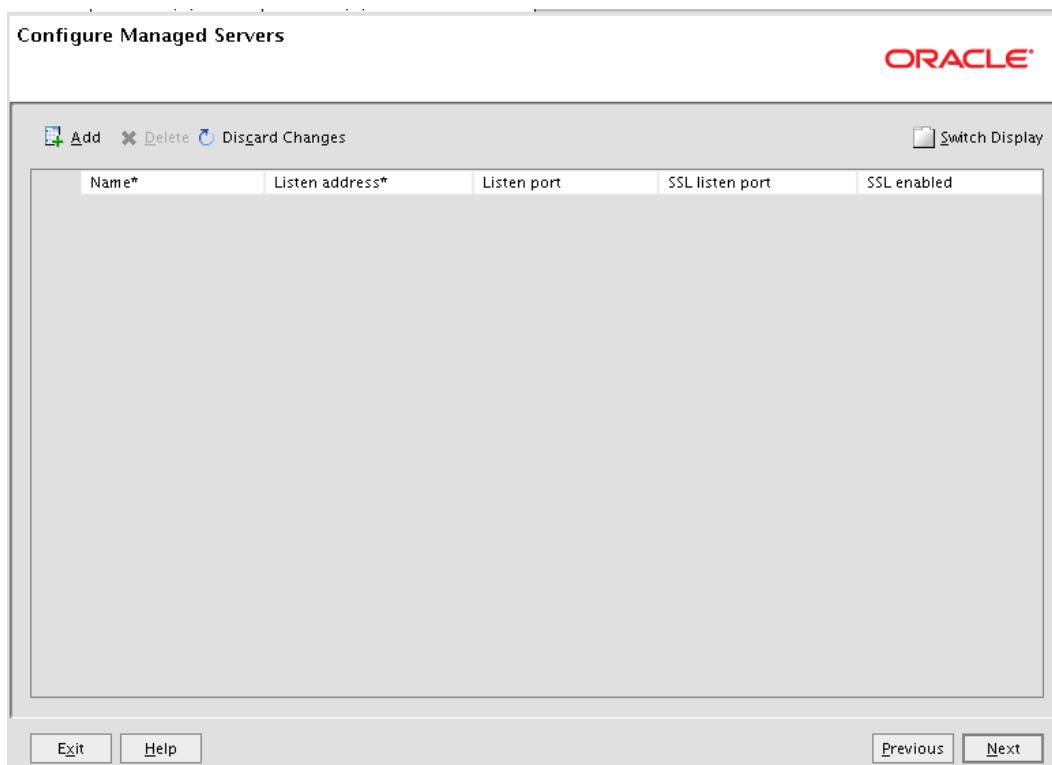

The screenshot shows the 'Configure Managed Servers' window of the Fusion Middleware Configuration Wizard. The window has a title bar with the Oracle logo and standard window controls. Below the title bar, there are buttons for 'Add', 'Delete', 'Disgard Changes', and 'Switch Display'. The main area is a table with the following columns: 'Name*', 'Listen address*', 'Listen port', 'SSL listen port', and 'SSL enabled'. The table is currently empty. At the bottom, there are buttons for 'Exit', 'Help', 'Previous', and 'Next'.

Name*	Listen address*	Listen port	SSL listen port	SSL enabled
-------	-----------------	-------------	-----------------	-------------

11. Create a managed server.

Configure Managed Servers ORACLE®

 Add  Delete  Discard Changes  Switch Display

	Name*	Listen address*	Listen port	SSL listen port	SSL enabled
→ 1	reim-server	All Local Addresses	15003	N/A	☐

Exit Help Previous Next

12. If SSL is enabled, update the SSL fields. Click Next.

Configure Managed Servers ORACLE®

 Add  Delete  Discard Changes  Switch Display

	Name*	Listen address*	Listen port	SSL listen port	SSL enabled
→ 1	reim-server	All Local Addresses	15003	15004	☒

Exit Help Previous Next

13. If the setup comprises of a cluster, the below screen need is to be filled. If the setup does not involve a cluster, you can skip this screen. Click **Next**.

Name*	Cluster messaging mode	Multicast address	Multicast port	Cluster address
-------	------------------------	-------------------	----------------	-----------------

14. Create nodemanager (5556 is the default port). Any free port can be used. Click **Next**.

	Name*	Post bind CID en...	Post bind G...	Post bind UID en...	Post bind U...	Node manager listen...	Node manager list...
→ 1	hostname	☐	nobody	☐	nobody	localhost	5556

15. Add the AdminServer and the reim-server to the nodemanager we just created. Click **Next**.

Assign Servers to Machines

ORACLE

Select a machine in the right pane. Then select the server(s) in the left pane and assign them to the machine by clicking the right arrow button.

Server

Machine

- Unix Machine
 - hostname
 - AdminServer
 - reim-server

→

←

Exit

Help

Previous

Next

16. Review the installation summary. Click **Create**.

Configuration Summary

ORACLE

Click on an item in the Domain Summary pane on the left to inspect its attributes in the Details pane below. You can make limited adjustments by clicking Previous to return to a prior panel. If everything is satisfactory, click Create.

Domain Summary

Summary View: Deployment

- REIMDomain (/u00/webadmin/product/10.3.6/WLS)
 - Server
 - AdminServer
 - reim-server

Details

Attribute	Value
Name	Basic WebLogic Server Domain
Description	Create a basic WebLogic Server domain without installing sample a
Author	Oracle Corporation
Location	/u00/webadmin/product/10.3.6/WLS/wserver_10.3/common/te


Exit

Help

Previous

Create

17. When the domain is successfully created, the following screen is displayed. Click **Done**.

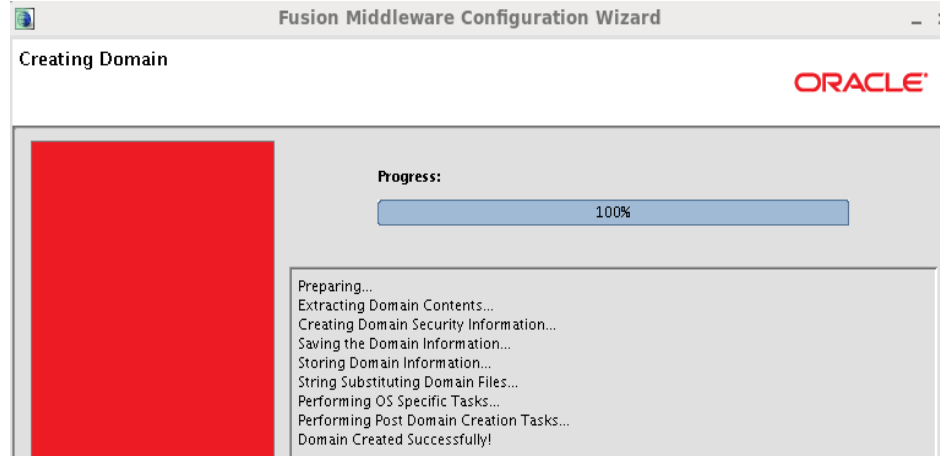

18. Start WebLogic Server from the `<DOMAIN_HOME>/bin`

Example:

```
/u00/webadmin/product/wls_retail/user_projects/domains/REIMDomain/bin/startWebLogic.sh
```

19. Create boot.properties file under `<DOMAIN_HOME>/servers/<AdminServer>/security`

The file 'boot.properties' should have the following:

```
-----
username=weblogic
password=<password>
-----
```



In the above, the password value is the password of WebLogic domain which is given at the time of domain creation.

20. Save the boot.properties file and restart the WebLogic server.

21. Login to the Admin console of the Domain

Example: <http://<hostname>:<port>/console>

In the below screen, provide username=weblogic and password=<weblogic password>

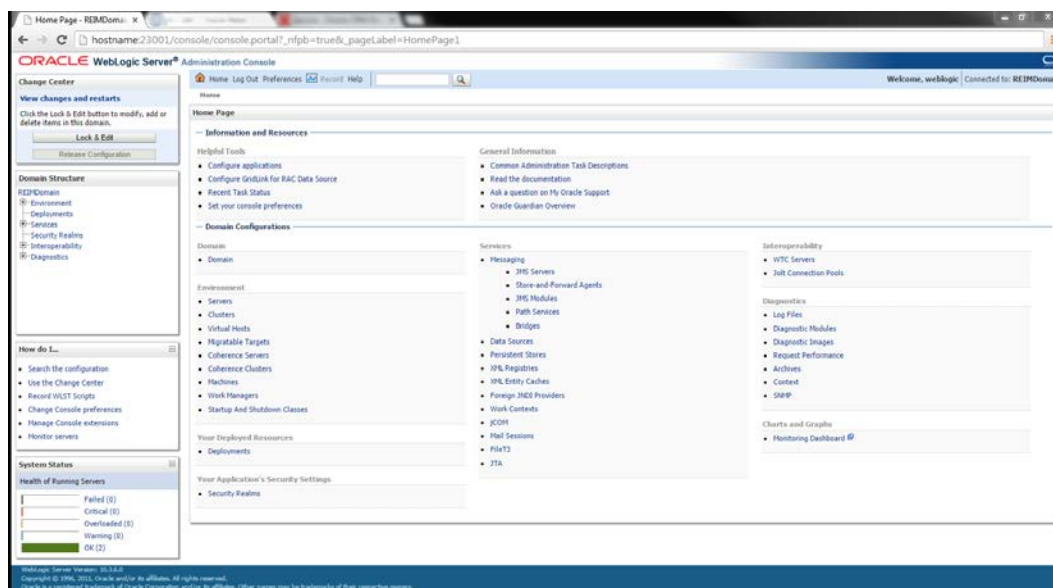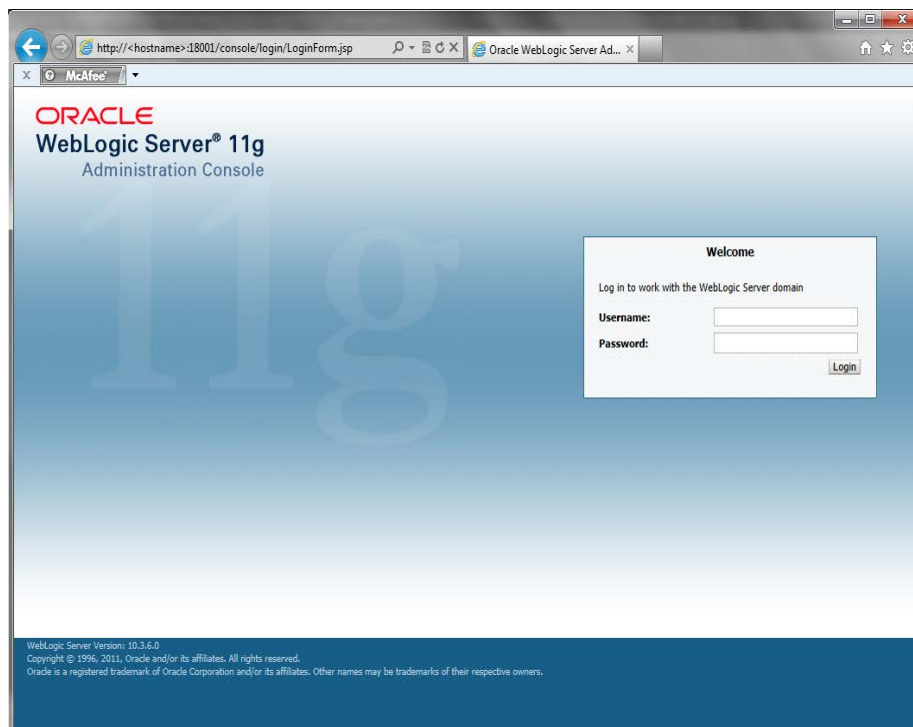

Start Node Manager


1. Start NodeManager from the server using the startNodeManager.sh at \$WLS_HOME/wlserver_10.3/server/bin
2. Edit the nodemanager.properties file at the following location with the below values:
\$WLS_HOME/wlserver_10.3/common/nodemanager/nodemanager.properties
 - StartScriptEnabled=true
 - StartScriptName=startWebLogic.sh.
3. NodeManager must be restarted after making changes to the nodemanager.properties file.

Note: The nodemanager.properties file is created after NodeManager is started for the first time. It will not be available before that point.

Start the Managed Server

After NodeManager and AdminServer are started, the managed server(s) can be started via the admin console.

1. Navigate to Environments > Servers, Control tab. Select reim-server and click **start**.

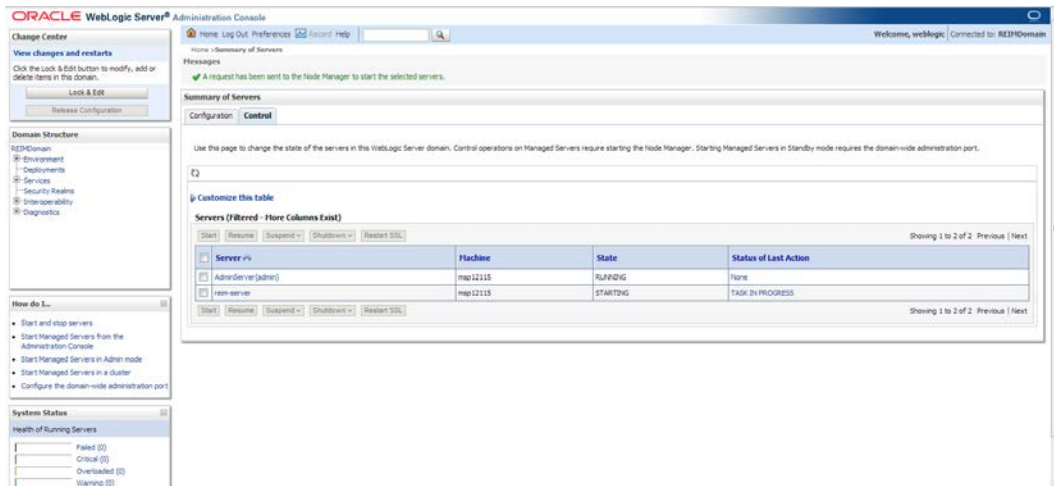

Expand the ReIM Application Distribution

To expand the ReIM application distribution, do the following.

1. Log in to the UNIX server as the user who owns the WebLogic installation. Create a new staging directory for the ReIM application distribution (reim14application.zip). There should be a minimum of 300 MB disk space available for the application installation files.

Example: /u00/webadmin/media/reim

This location is referred to as INSTALL_DIR for the remainder of this chapter.

2. Copy reim14application.zip to INSTALL_DIR and extract its contents.
3. Export WEBLOGIC_DOMAIN_HOME=<full_path_to_domain>.
4. Update <WLS_HOME>/server/lib/weblogic.policy file with the below.

Note: If copying the following text from this guide to UNIX, ensure that it is properly formatted in UNIX. Each line entry beginning with "permission" must terminate on the same line with a semicolon.

Note: <WEBLOGIC_DOMAIN_HOME> in the below example is the full path of the Weblogic Domain, <managed_server> is the managed server created for the App and <context_root> correlates to the value entered for the application deployment name/context root of the application during installation. See the example. There should not be a space after **file:** in the following. file:<WEBLOGIC_DOMAIN_HOME>.

```
grant codeBase "file:
<WEBLOGIC_DOMAIN_HOME>/servers/<managed_server>/tmp/_WL_user/<context_root>/-"
{permission java.security.AllPermission;permission
oracle.security.jps.service.credstore.CredentialAccessPermission
"credstoessp.credstore", "read,write,update,delete";permission
oracle.security.jps.service.credstore.CredentialAccessPermission
"credstoessp.credstore.*", "read,write,update,delete";};
```

An example of the full entry that might be entered is:

```
grant codeBase
"file:/u00/webadmin/product/wls_retail/user_projects/domains/REIMDomain/server
s/reim-server/tmp/_WL_user/reim/-" {permission
java.security.AllPermission;permission
oracle.security.jps.service.credstore.CredentialAccessPermission
"credstoessp.credstore", "read,write,update,delete";permission
oracle.security.jps.service.credstore.CredentialAccessPermission
"credstoessp.credstore.*", "read,write,update,delete";};
```

5. Restart WebLogic admin server after making changes to the weblogic.policy file in the previous step.

Clustered Installations– Preinstallation Steps

Note: Skip this section if you are not clustering the application server.

Complete the following preinstallation steps.

1. Make sure that you are able to start and stop the managed servers that are part of the ReIM Cluster from the Administration Console.
2. Update the \$WEBLOGIC_HOME/wlserver_10.3/server/lib/weblogic.policy file on all nodes with the same ReIM entries for java security permissions that were entered on the main server. See the Start the Managed Servers section for additional information.

There are no additional steps to take before running the installer for ReIM.

Configure LDAP authentication Preinstallation Steps (Initial Login to ReIM)

In order to Login to ReIM after the installation is done, you need to complete the following pre-installation steps.

1. Make sure that you have access to a working LDAP server.


Note: It is recommended that you use OID 11g (11.1.1.7).

2. Create a Group called “reim”. All users need to be a member of this group in order to login to the ReIM application.


Note: The ReIM code looks for a group named “reim” so it is imperative that the group be named “reim”.


Example: Using OID 11.1.1.7, the steps to follow are:

- a. Open your OID connection by launching ODSM (Oracle Directory Services Manager). A screen similar to the following is displayed.


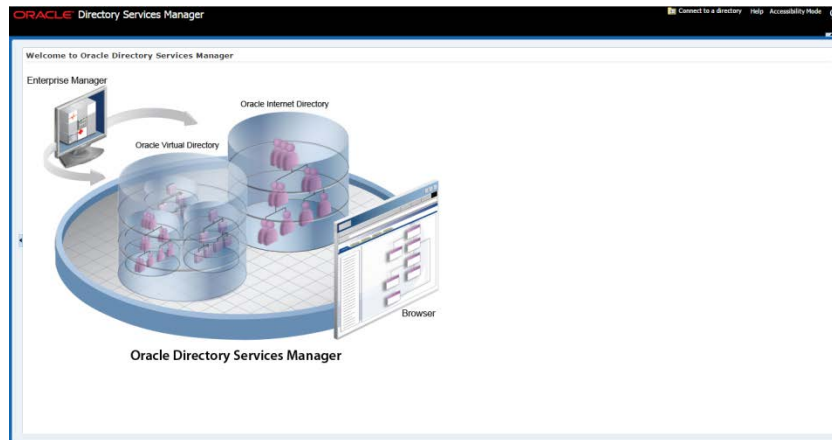


- b. Click Connect to a directory and select your OID directory.

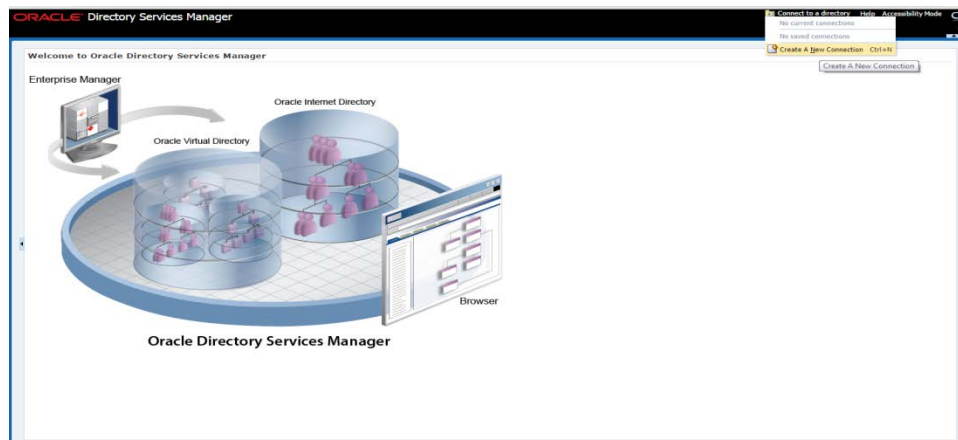


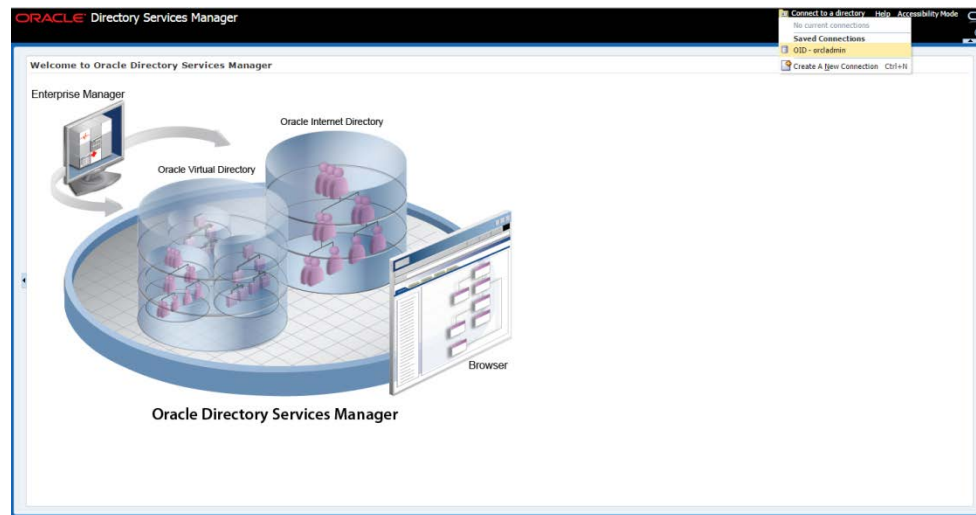


c. From the OID Connect dialog, click the **Connect** button.

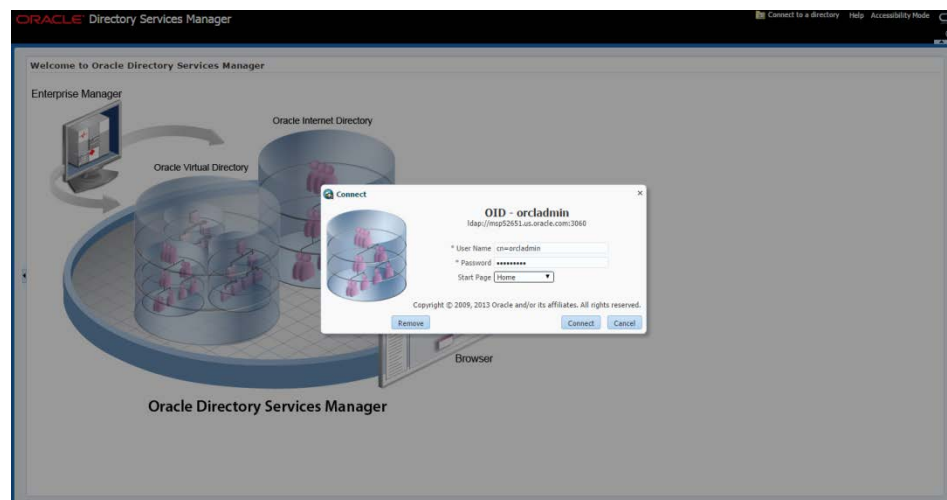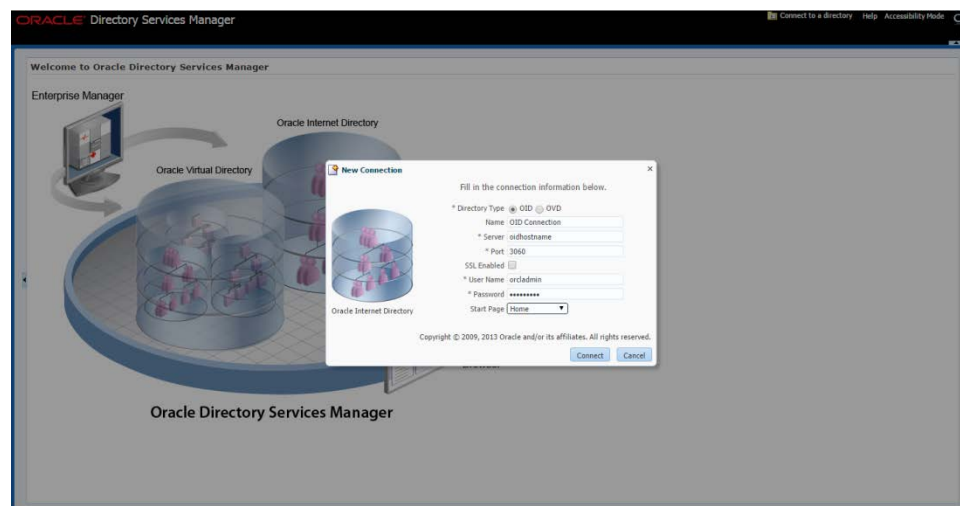


- d. From the Oracle Internet Directory Welcome Screen, select the Data Browser tab. The DataBrowser tree shows how to find the “cn=Group” element

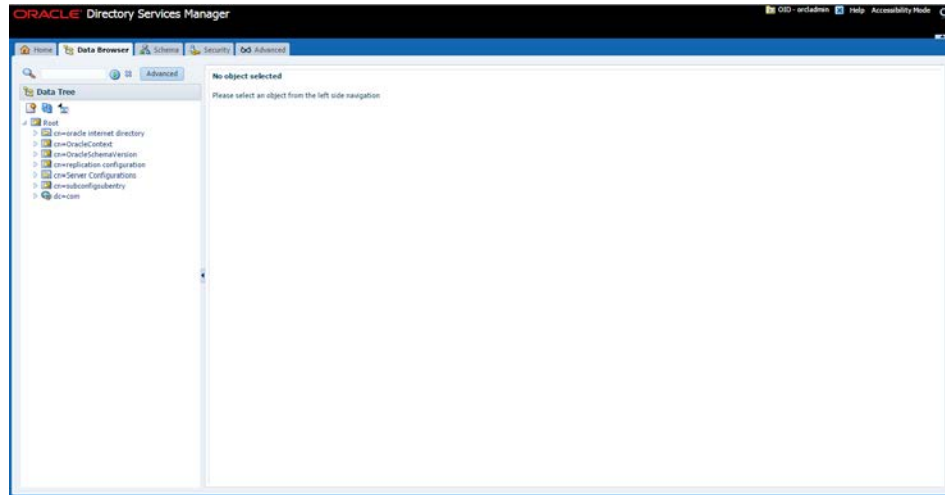


- e. From the Data Tree panel of the ODSM screen, navigate to dc=com,dc=oracle,dc=us,cn=Groups.

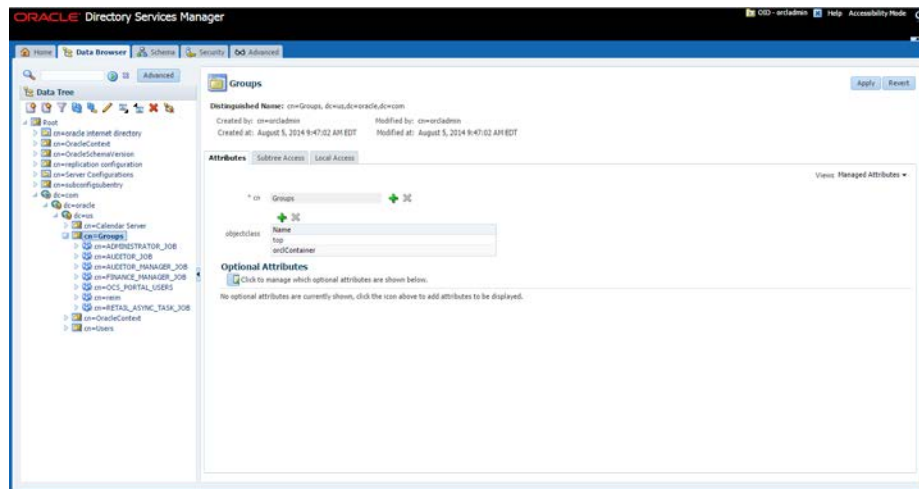


- f. Right-click `cn=Groups` and select **Create**.

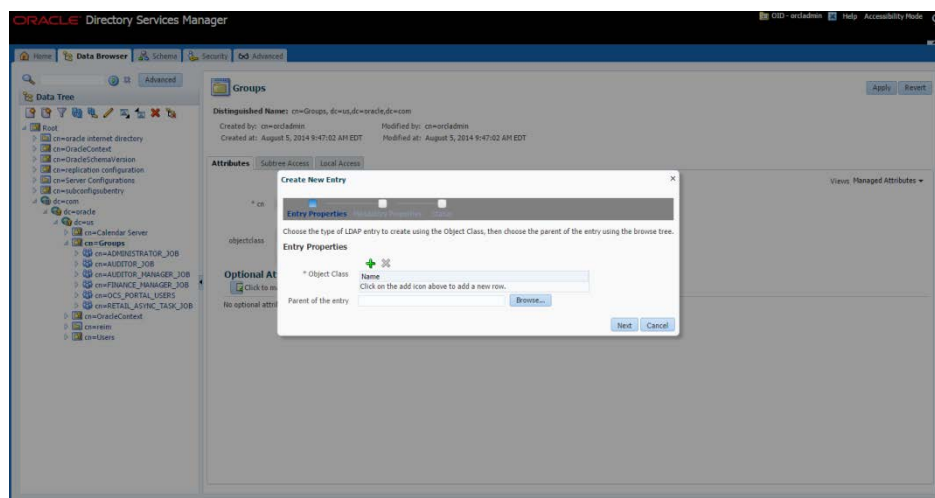


- g. From the Create New Entry dialog, click the + icon to see the Object Classes in the dropdown menu.
- h. From the Add Object Class drop down menu select the below object classes:
- top
 - orclGroup
 - groupOfUniqueNames

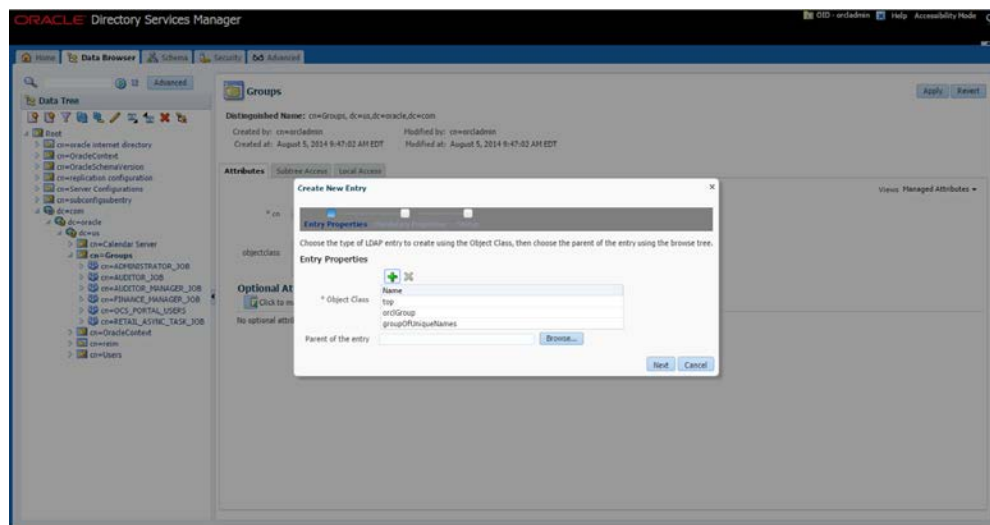


- i. On the Field Parent of the Entry field enter: cn=Groups, dc=us,dc=oracle,dc=com.

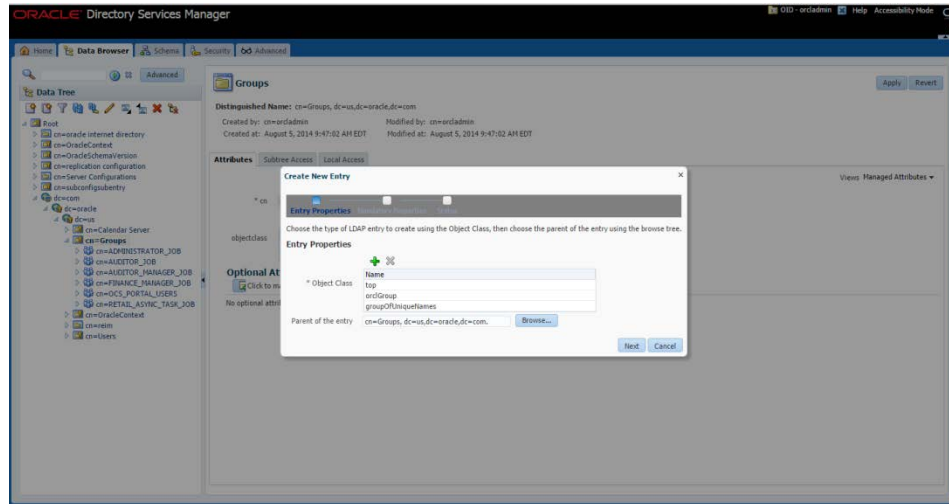

- j. Click Next.
- k. On the “cn” text field enter: “reim”. On Resolved Distinguished Name field enter: cn

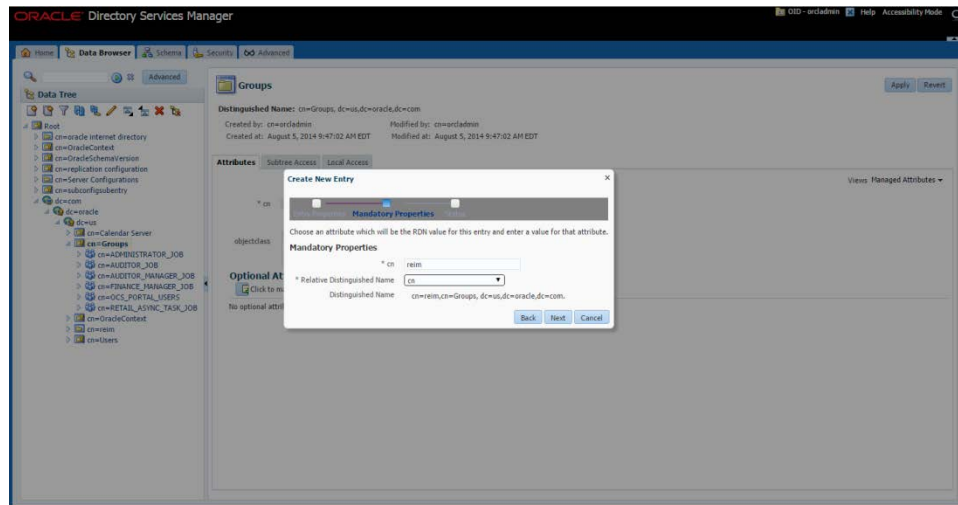


l. Click Next.

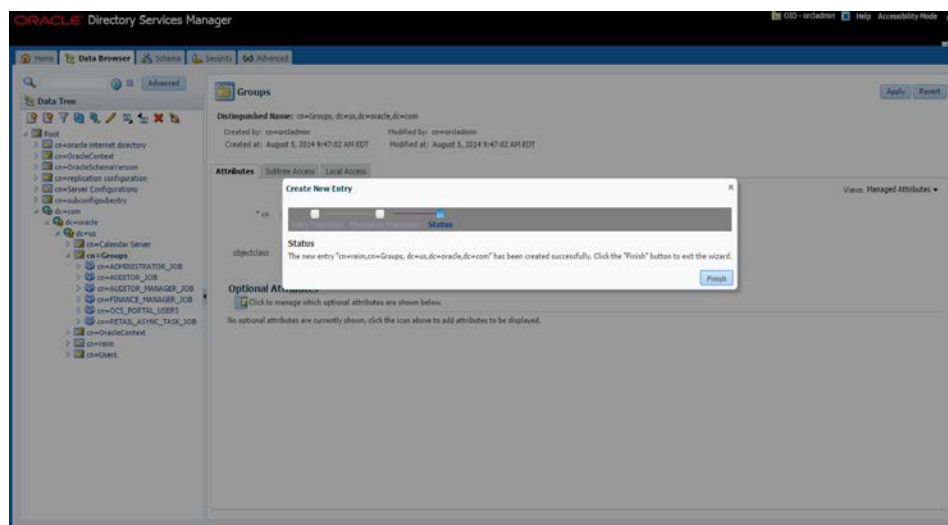

m. Click Finish.


After clicking on Finish, your screen should look like this:

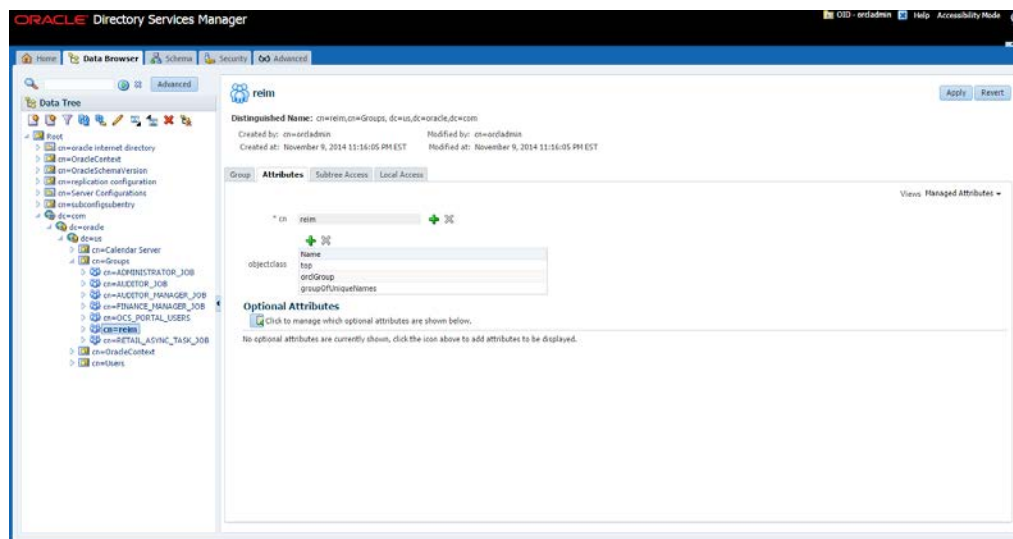


3. Create an LDAP connection user with the necessary rights to do sub-tree searches on your users and groups respectively. This user can be named anything but "REIM.ADMIN" is used in this document. This same user should be given as an input for 'Search User DN' on the 'LDAP Directory Server Details' screen while installing the ReIM application. This is the user which ReIM uses to login to LDAP and perform the necessary search in the LDAP.

Follow the below steps to create the 'example:REIM.ADMIN' user.


- a. From the Oracle Internet Directory Welcome Screen, select the Data Browser tab. The Data Browser tree shows how to find the “cn=Users” element. From the Data Tree panel of the ODSM screen, navigate to the Users branch.

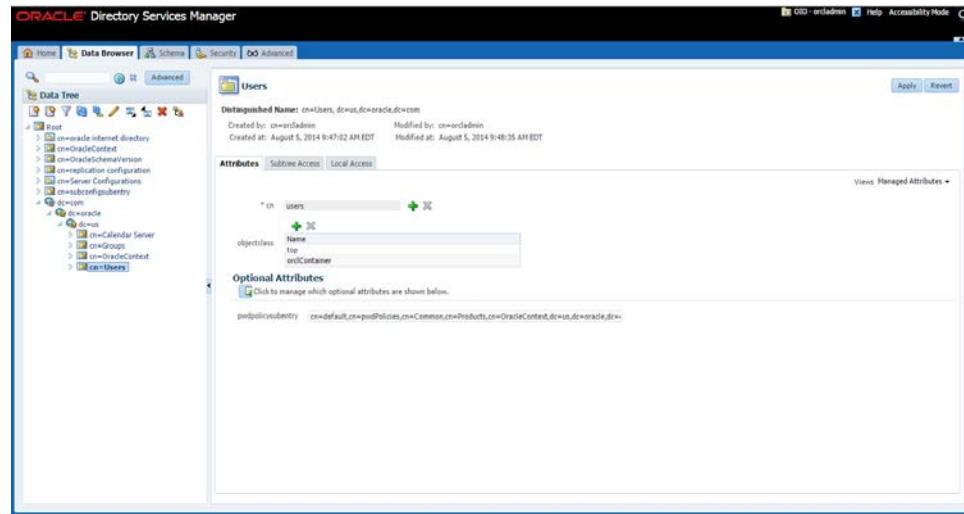

- b. On the Users screen, press right mouse button. With cn=Users highlighted, select **Create** from the drop down menu panel.

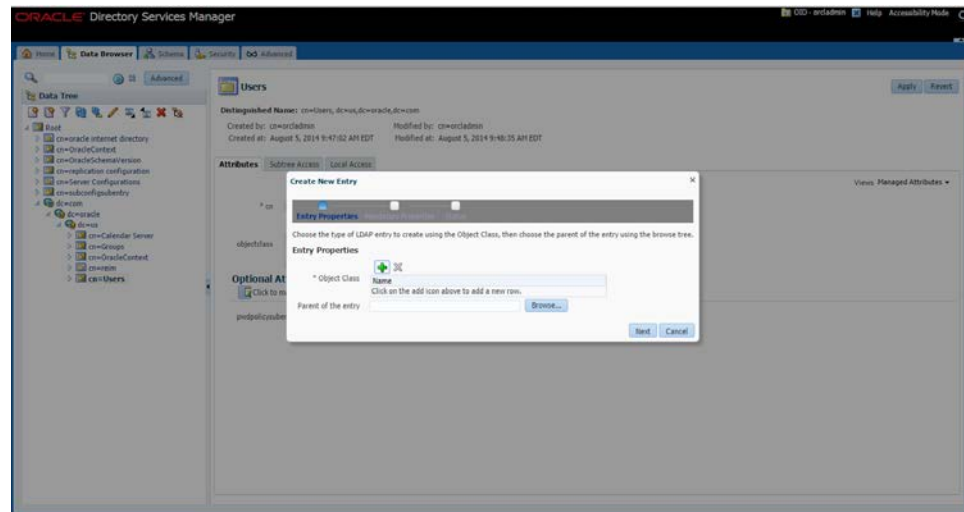


c. In the Object Class field, click the + icon.

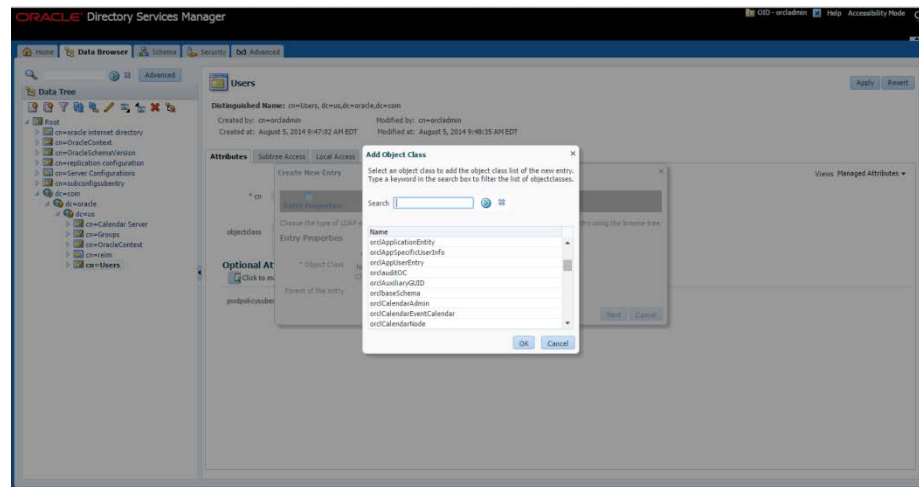


d. From the Add Object Class menu, select the below object classes:


- top
- orclContainer
- organizationalPerson
- orclUser
- person
- orclUserV2
- inetOrgPerson

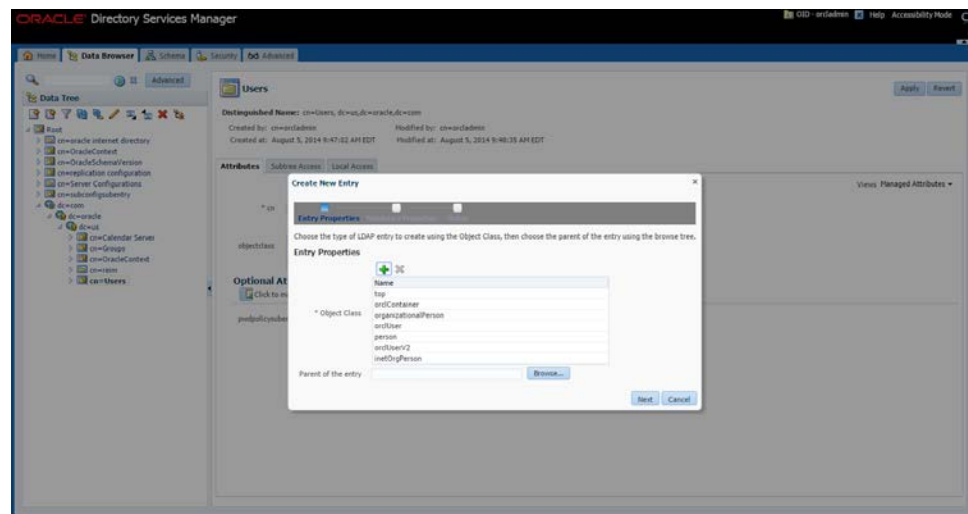


- e. In the Parent of the Entry field enter the following:
cn=Users,dc=us,dc=oracle,dc=com

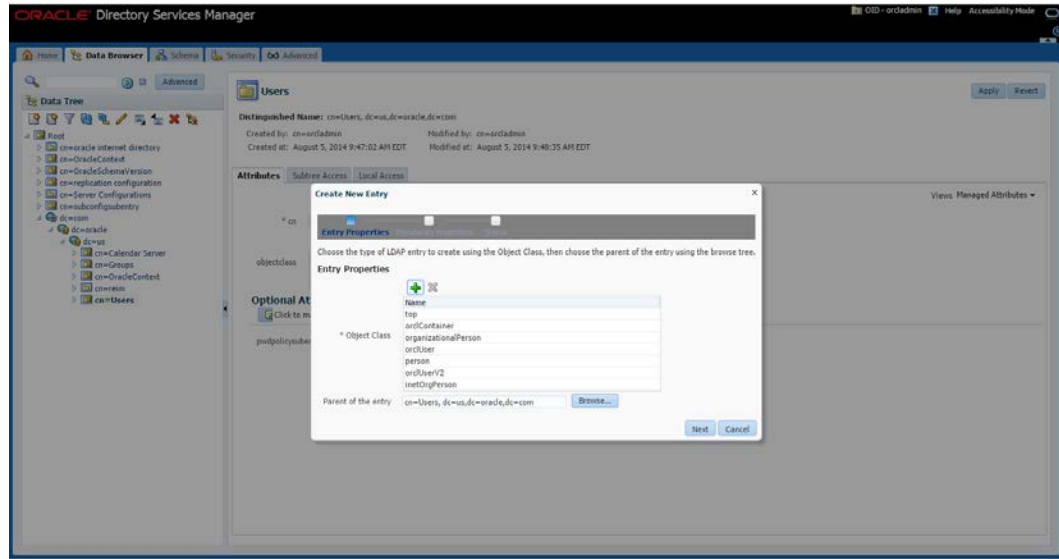


- f. Click Next. The Mandatory Properties dialog is displayed.
- g. From Mandatory Properties dialog, On the “*cn” text field enter: “REIM.ADMIN”. On the “*sn” text field enter: “admin”. On Resolved Distinguished Name field enter: cn

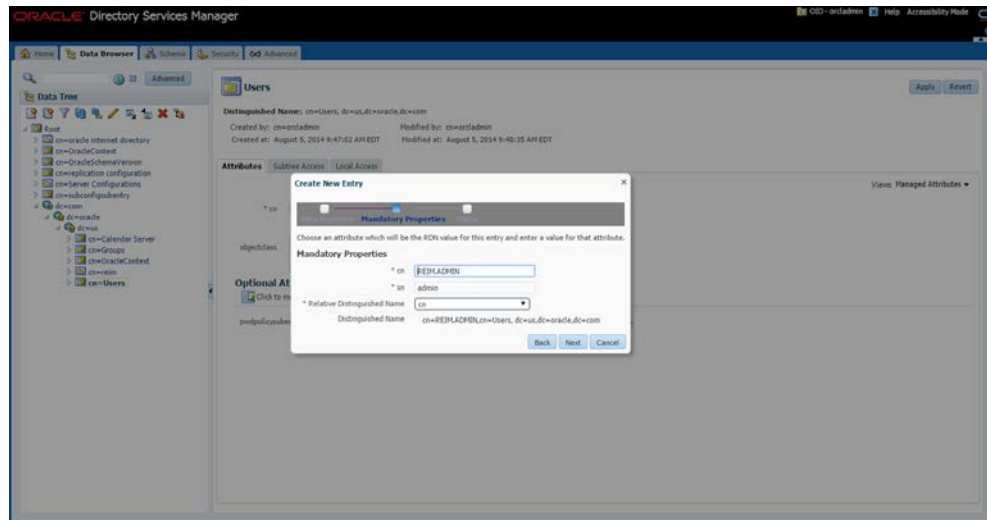

- h. Click **Next**.
- i. Make sure the information on screen is correct. Click **Finish** to create the REIM.ADMIN user.

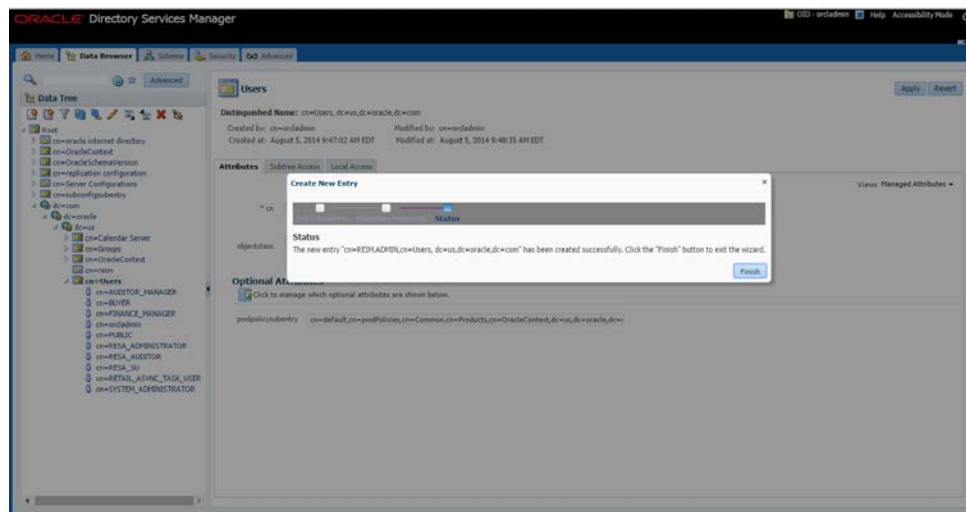

When the “REIM.ADMIN” user is created a screen similar to the one below is displayed.

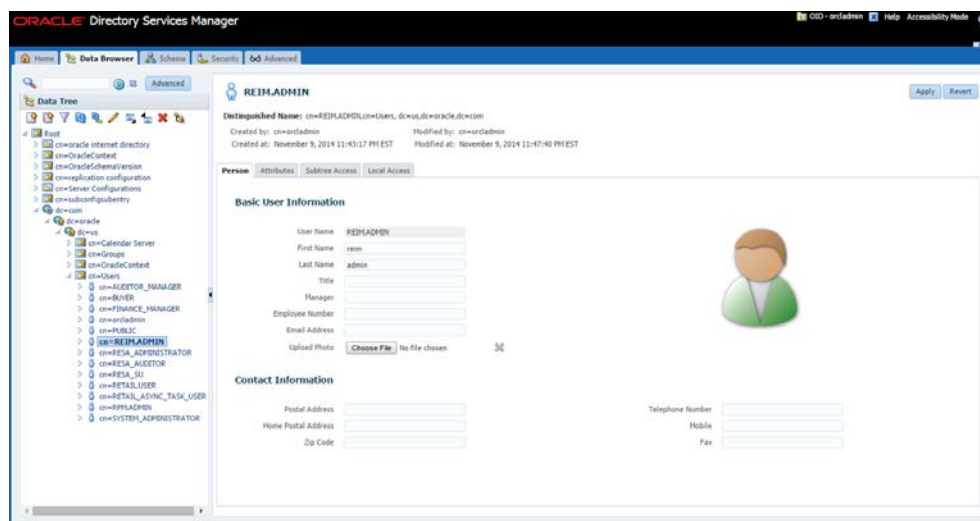

- j. Click the Person tab and enter the following Basic User Information:
- First Name: <reim>
 - Last Name: <admin>
 - Email Address: <reim.admin@mycompany.com>

The screenshot shows the Oracle Directory Services Manager interface. On the left is a 'Data Tree' with a hierarchy including 'Root', 'cn=oracle internet directory', 'cn=OracleContext', 'cn=OracleSchemaVersion', 'cn=replication configuration', 'cn=Server Configurations', 'cn=subconfigentry', 'dc=com', 'dc=oracle', 'cn=Calendar Server', 'cn=Groups', 'cn=OracleContext', 'cn=Users', 'cn=AUDITOR_MANAGER', 'cn=BUYER', 'cn=FINANCE_MANAGER', 'cn=oracleadmin', 'cn=PUBLIC', 'cn=REIMADMIN', 'cn=RESA_ADMINISTRATOR', 'cn=RESA_AUDITOR', 'cn=RESA_SUI', 'cn=RETAIL_USER', 'cn=RETAIL_ASYNC_TASK_USER', 'cn=REIMADMIN', 'cn=SYSTEM_ADMINISTRATOR'. The main panel is titled 'REIM.ADMIN' and shows the 'Person' tab. It includes 'Basic User Information' and 'Contact Information' sections.

REIM.ADMIN
Distinguished Name: cn=REIMADMIN,cn=Users, dc=us, dc=oracle, dc=com
Created by: cn=oracleadmin Modified by: cn=oracleadmin
Created at: November 9, 2014 11:43:17 PM EST Modified at: November 9, 2014 11:47:40 PM EST

Basic User Information

User Name	REIMADMIN
First Name	reim
Last Name	admin
Title	
Manager	
Employee Number	
Email Address	reim.admin@company.domain
Upload Photo	Choose File No file chosen

Contact Information

Postal Address	
Home Postal Address	
Zip Code	
Telephone Number	
Mobile	
Fax	


- k. Click the Attributes tab (select View -> Show all) and enter the following information:
- Given Name: <reim>
 - Mail: <reim.admin@mycompany.com>
 - Uid: REIM.ADMIN
 - User Password: <password>

The screenshot shows the Oracle Directory Services Manager interface with the 'Attributes' tab selected for the 'REIM.ADMIN' user. The 'View' dropdown is set to 'Show All'. The attributes are listed in a table with input fields and status icons (green plus for valid, red X for invalid).

REIM.ADMIN
Distinguished Name: cn=REIMADMIN,cn=Users, dc=us, dc=oracle, dc=com
Created by: cn=oracleadmin Modified by: cn=oracleadmin
Created at: November 9, 2014 11:43:17 PM EST Modified at: November 9, 2014 11:47:40 PM EST

Attribute	Value	Status
cn	admin	Invalid (Red X)
st		Valid (Green Plus)
street		Valid (Green Plus)
telephoneNumber		Valid (Green Plus)
telephoneTerminalIdentifier		Valid (Green Plus)
telephoneNumber		Valid (Green Plus)
title		Valid (Green Plus)
uid	REIMADMIN	Invalid (Red X)
userCertificate		Valid (Green Plus)
userPwC12		Valid (Green Plus)
userPassword	*****	Valid (Green Plus)
userSPRDNCertificate		Valid (Green Plus)
x21AAddress		Valid (Green Plus)
x500UniqueIdentifier		Valid (Green Plus)

- I. Click **Apply**. After applying the changes, your screen will look similar to the following:

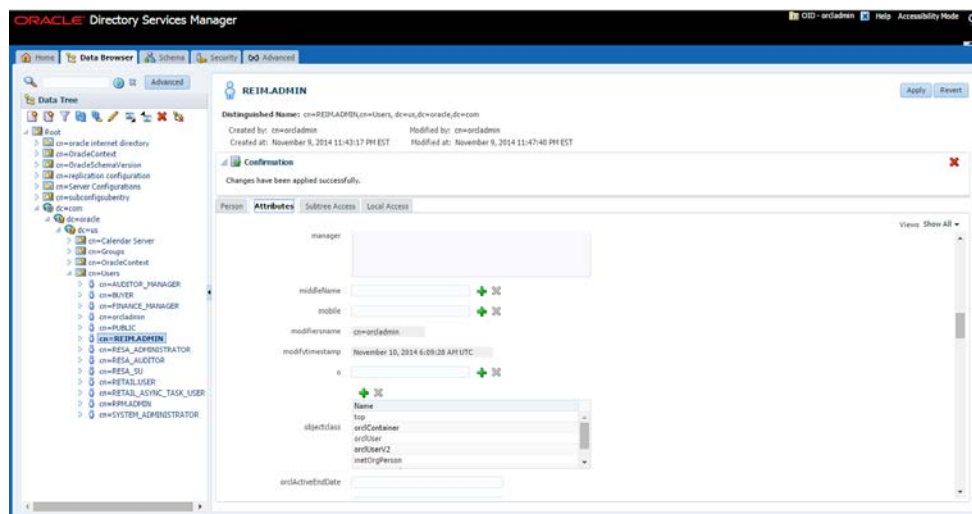

4. Create the Application Admin user who will have access (Login) to ReIM.

If you are installing other Merchandising applications you should have already created RETAIL.USER. If you do not have RETAIL.USER already created in LDAP, create “RETAIL.USER” following the same procedure described for creating the REIM.ADMIN user above or you may use the sample LDIF (RETAIL.USER) file provided at the end of this section to create the attributes and create the user.

- a. The following attributes need to be included for the new user:
 - Preferred Country: US
 - Preferred Language: en

Note: PreferredCountry and PreferredLanguage attributes should be defined using standard ISO codes for language and country.

If the attributes above are not available in LDAP then refer to [Create the preferredCountry Attribute, Object Class and User](#) for the details to create the “preferredCountry” attribute and the objectclass “retailUser”.

There is a RETAIL.USER.ldif file which has been given as a template for creating the user.

- b. The “RETAIL.USER” user should be created under the following container:
dc=com,dc=oracle,dc=us,cn=Users

The DN name for “RETAIL.USER” should be:

cn=RETAIL.USER,cn=Users,dc=us,dc=oracle,dc=com

Note: It need not be named as only RETAIL.USER but we refer to RETAIL.USER in this document. Whatever username is chosen to login to the ReIM application, that user should possess the following mandatory attributes with the values added for the attributes in LDAP.

- -uid
 - -givenname
 - -sn
 - -mail
 - -userpassword
 - -preferredLanguage
 - -preferredcountry
 - -cn
-

These are considered as the mandatory attributes for the login user (example:RETAIL.USER) which is listed in ldap.properties located on the ReIM server at <DOMAIN_HOME>/servers/<reim-server>/tmp/_WL_user/<reim>/<xstkfu>/reim14.war/WEB-INF/classes/com/rettek/reim/ldap.properties

You can see the following list from ldap.properties:

- login_id_attribute_name=uid
- user_first_name_attribute_name=givenname
- user_last_name_attribute_name=sn
- user_email_attribute_name=mail
- user_password_attribute_name=userpassword
- user_language_attribute_name=preferredLanguage
- user_country_attribute_name=preferredcountry
- user_main_key=cn
- # Name of attributes in LDAP for enterprise roles
- role_member = uniqueMember
- role_application = cn

Note: Attributes for enterprise roles will get added as part of assigning users for the group “reim” created in LDAP which is explained further in this document.

In order the ReIM login to work, the above attributes must contain the values in the LDAP for the login user (Example: RETAIL.USER).

ORACLE Directory Services Manager

RETAIL.USER

Distinguished Name: cn=RETAIL.USER,cn=Users,dc=us,dc=oracle,dc=com
 Created by: cn=oradadmin Modified by: cn=oradadmin
 Created at: November 10, 2014 12:56:14 AM EST Modified at: November 10, 2014 12:56:14 AM EST

Person | **Attributes** | **Subtree Access** | **Local Access**

Basic User Information

User Name: RETAIL.USER
 First Name: retail
 Last Name: user
 Title:
 Manager:
 Employee Number:
 Email Address: retail.user@company.domain
 Upload Photo: [Choose File](#) No file chosen

Contact Information

Postal Address:
 Home Postal Address:
 Zip Code:
 Telephone Number: 800-111-2222
 Mobile:
 Fax:

- c. Example value of Preferred Country is: <US> and Preferred Language is <en>. These values can be used if the country is US and language is English. If another locale is used, the value needs to be entered based on that locale (If user wants to see all the attributes including preferred Country, select View->Show All)

ORACLE Directory Services Manager

RETAIL.USER

Distinguished Name: cn=RETAIL.USER,cn=Users,dc=us,dc=oracle,dc=com
 Created by: cn=oradadmin Modified by: cn=oradadmin
 Created at: November 10, 2014 12:56:14 AM EST Modified at: November 10, 2014 12:56:14 AM EST

Person | **Attributes** | **Subtree Access** | **Local Access**

Attributes

* cn: RETAIL.USER
 * cn: user
 * cn: user

objectClass: top, organizationalperson, orcluser, person, retailuser


Optional Attributes

Click to manage which optional attributes are shown below.

description: Retail User
 givenName: retail
 mail: retail.user@company.domain
 middleName: or
 preferredLanguage: en

- d. Record the password you entered, so that you know it all the time.
5. Assign the user "RETAIL.USER" and any other users which need to login to ReIM Application to the "reim" group
- On the "reim" Group screen, on the Group tab, scroll down the right panel until you find the Members section
 - On the Members section insert:
 cn=RETAIL.USER,cn=Users,dc=us,dc=oracle,dc=com

- c. Click **Apply** to save your changes. After applying the changes, the screen should look similar to the following:

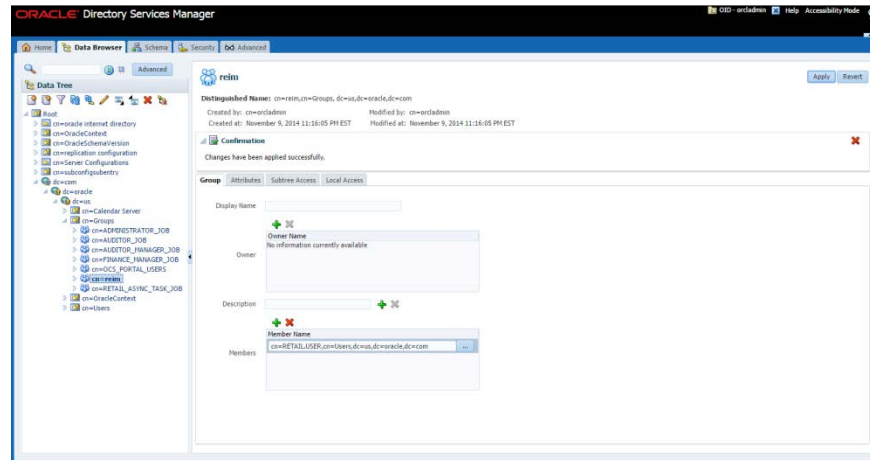

6. Add new user (Example:RETAIL.USER) to the database if not already there.
- Insert the new user (example: RETAIL.USER) into the im_business_role_member database table by entering the following SQL command:

```
insert into im_business_role_member
(USER_ID, BUSINESS_ROLE_ID)
values ('RETAIL.USER', 1);
```

Note: The above business role ID=1 value should be mapped with IM_BUSINESS_ROLES database table for that particular user (Example: RETAIL.USER).

It may vary based on the mapping in IM_BUSINESS_ROLES database table for the user you are inserting the record.

USER_ID	BUSINESS_ROLE_ID
1 ADMIN	9000
2 ALAIN.FRECON	9000
3 DEMO1	9000
4 DEMO2	9000
5 DEMO3	9000
6 DEMO4	9000
7 DEMO5	9000
8 DEMO6	9000
9 LIMPRIV	9000
10 RETAIL.USER	9000
11 mihir.parekh	9000
12 noah	9000

You are now ready to log in to ReIM after product installation.

Create the preferredCountry Attribute, Object Class and User

- The “preferredCountry” and “preferredLanguage” LDAP attributes, must be included in the users created in LDAP for ReIM login.
- The “preferredCountry” LDAP attribute is created as part of the other MOM products that use LDAP authentication.
- The “preferredLanguage” LDAP attribute will be available as part of other object classes (example: inetorgperson) which can be imported to the user to include this attribute for the user. If you do not have the attribute “preferredCountry” in your LDAP installation, it must be created.
- The sample retailuserobjectclass.ldif below creates the attribute “preferredCountry” and the object class “retailuser” and assign the attribute to the new object class “retailuser”.

Use the sample RETAIL.USER.ldif to create the user “RETAIL.USER” in LDAP. This ldif contains the new object class created along with the necessary object classes which will assign the mandatory attributes to the user.

You need to edit these scripts to match your LDAP installation. The object identifier numbers you see in the script follow the standards of a local Oracle installation. The object identifier numbers will be different from those listed in the sample script based on your install. They must be unique among all the other object classes and attributes. The sample ldif scripts should only be used as a template purpose. You are responsible for modifying it according to your LDAP needs. Perform the following steps to run the sample ldif scripts (The user can also import the files directly from the odsm console by selecting the option ‘Import LDIFs’):

1. Copy sample retailuserobjectclass.ldif and RETAIL.USER.ldif scripts (below this section of instructions) to a temp directory in your system.
2. Edit the sample retailuserobjectclass.ldif and RETAIL.USER.ldif scripts to match your LDAP tree structure.
3. Edit the object identifier numbers for the object class and attributes (they must be unique among all the other object classes and attributes).
4. In the temp directory in which you copied the sample ldif scripts, export the environments variables that match your environment:

Example:

```
export ORACLE_HOME=/u00/webadmin/product/10.3.X_OID/OID/Oracle_IDM1 (replace
with your OID server name)
export oid_host=hostname.us.oracle (replace with your host)
export oid_port=3060 (replace with your OID port number)
export oid_pwd=password for oid administrator, in this case for orcladmin
```

5. Run the following LDAP commands to run the LDIF files in the LDAP:

```
$ORACLE_HOME/bin/ldapadd -o <retailuserobjectclass_error.ldif> -v -c -h
$oid_host -p $oid_port -w $oid_pwd -D cn=orcladmin -f
retailuserobjectclass.ldif
```

```
$ORACLE_HOME/bin/ldapadd -o <retailuser_error.ldif> -v -c -h $oid_host -p
$oid_port -w $oid_pwd -D cn=orcladmin -f RETAIL.USER.ldif
```

Note: retailuserobjectclass.ldif must be run before running RETAIL.USER.ldif.

If you already have RETAIL.USER, then you will need to only run retailuserobjectclass.ldif and import the “retailuser” object class in the user ‘RETAIL.USER’.

Sample script retailuserobjectclass.ldif

```
# Oracle Retail - ReIM User LDAP Schema
# You WILL need to make some changes to this based upon your #environment and
# user you want to add
#
# This schema uses the OID tree starting with:
# 1.3.6.1.4.1.12388.897
# Where 1.3.6.1.4.1.12388 identifies definitions as
# belonging to the private enterprise MyCompany (12388),
# and the 897 identifies the ReIM application.
#
#-----
#-----
# Common Attributes
#-----
#-----
#
#
dn: cn=subschemasubentry
changetype: modify
add: attributetypes
attributetypes: (1.3.6.1.4.1.11380.97.7.14
    NAME 'preferredCountry' DESC 'REIM User preferred country ISO code' )

dn: cn=subschemasubentry
changetype: modify
add: objectclasses
objectclasses: (1.3.6.1.4.1.1.11380.97.11
    NAME 'retailuser' DESC 'Oracle Retail Users for MOM' STRUCTURAL
    sup ( top )
    MUST ( sn $ cn )
    MAY ( uid $ userPassword $ preferredCountry) )
```

Sample LDIF script for creating user RETAIL.USER - RETAIL.USER.LDIF


```
# start new entry for user RETAIL.USER
dn: cn=RETAIL.USER,cn=Users,dc=us,dc=oracle,dc=com
changetype: add
objectclass: top
objectclass: organizationalperson
objectclass: orcluser
objectclass: person
objectclass: retailuser
objectclass: orcluserV2
objectclass: inetorgperson
orclactivestartdate: 20121126000000z
givenname: RETAIL
sn: USER
cn: RETAIL.USER
uid: RETAIL.USER
userpassword: <password>
```

```

mail: retail.user@company.domain
preferredCountry: US -> This will change based on the country.
preferredLanguage: en -> This will change based on the locale.
description: Reim Login User
#done

```

The screen below displays the results of the ldif script. The preferredCountry and preferredLanguage are included in the LDAP RETAIL.USER user.

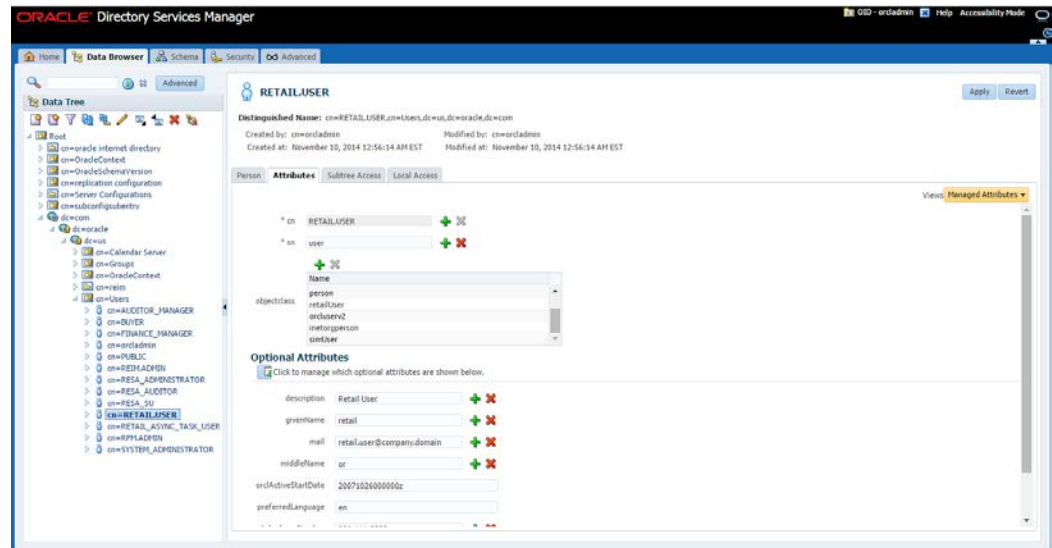

Run the ReIM Application Installer

When the managed server is configured and started, you can run the ReIM application installer. This installer configures and deploys the ReIM application.

Note: See [Appendix: ReIM Application Installer Screens](#) for details on every screen and field in the application installer.

Note: It is recommended that the installer be run as the same UNIX account which owns the application server ORACLE_HOME files.

1. Change directories to `INSTALL_DIR/reim/application`.
2. Set the `ORACLE_HOME` and `JAVA_HOME` environment variables. `ORACLE_HOME` should point to your WebLogic 11g installation. `JAVA_HOME` should point to the Java 7.0 (1.7+) JDK.
3. Set the `WEBLOGIC_DOMAIN_HOME` environment variable to point to the domain that ReIM will be installed to (for example, `/u00/webadmin/product/wls_retail/user_projects/domains/REIMDomain`).
4. If you are using an X server such as Exceed, set the `DISPLAY` environment variable so that you can run the installer in GUI mode (recommended). If you are not using an X server, or the GUI is too slow over your network, unset `DISPLAY` for text mode.
5. Run the `install.sh` script. This launches the installer. After installation is completed, a detailed installation log file is created (`reim14install.<timestamp>.log`).

Resolving Errors Encountered During Application Installation

If the application installer encounters any errors, it halts execution immediately. You can run the installer in silent mode so that you do not have to retype the settings for your environment. See [Appendix: Installer Silent Mode](#) in this document for instructions on silent mode.

See [Appendix: Common Installation Errors](#) in this document for a list of common installation errors.

Because the application installation is a full reinstall every time, any previous partial installs are overwritten by the successful installation.

Clustered Installations – Post-Installation Steps

If you are installing the ReIM application to a clustered WebLogic Server environment, there are some extra steps you need to take to complete the installation. In these instructions, the application server node with the ORACLE_HOME you used for the ReIM installer is referred to as the *master server*. All other nodes are referred to as the *remote server*.

1. The ReIM batch files should be copied from the master server to each of the remote servers under the same path as on the master server. You should take the <retailhome>/batch directory and copy it onto the remote servers under the same path.
2. The Oracle Retail Installation creates some security files on \$WEBLOGIC_DOMAIN_HOME/retail/context root/config directory. Copy this directory to each remote node of the Cluster, matching the full path of the location of this directory on main node.
3. The Oracle Retail Installation creates some properties files on \$WEBLOGIC_DOMAIN_HOME/retail/context root/ properties directory. Copy this directory to each remote node of the Cluster, matching the full path of the location of this directory on main node

Installing the REIM BI Publisher Templates

In this section we will outline how the REIM report templates are installed into the appropriate BI server repositories which will be referred to as BI_REPOSITORY

Example:

```
/u00/webadmin/product/10.3.X/WLS/user_projects/domains/bifoundation_domain/
config/bipublisher/repository
```

Report files are available from - " INSTALL_DIR/reim14/reports " and have to be copied into the newly created directory within BI Publisher repository Guest Reports directory.

1. Create the directory to hold the reports under <BI_REPOSITORY>
mkdir <BI_REPOSITORY>/Reports/Guest/REIM
2. Change directory to the INSTALL_DIR/reports. This directory contains subdirectories whose names reflect the names of report templates provided with REIM.
3. Copy each report directory into the directory created above
For example,
cp -R * <BI_REPOSITORY>/Reports/Guest/REIM

Backups Created by Installer

The ReIM application installer backs up a previous batch script installation by renaming it from `reim-batch` to `reim-batch.<timestamp>`. This is done to prevent the removal of any custom changes you might have. These backup directories can be safely removed without affecting the current installation.

Example: `reim-batch.200803011726`

Test the ReIM Application

After the application installer completes you should have a working ReIM application installation. To launch the application, open a web browser and go to `http://hostname:(managed_server_port)/<context_root>/index.jsp`.

If you have configured a WebTier to a front end ReIM application, use http port instead of managed server port.

Example: `http://appserver1:17009/reim01/index.jsp`

reim.properties

The `reim.properties` file contains most of the settings for the ReIM application. Many properties in this file are set by the installer to get a working application up and running, but you may want to modify other settings in this file.

To modify settings in the properties file, you must redeploy the ReIM application. The properties values are stored in the `templates/reim.properties` file, which is in the directory where you expanded the ReIM installer files (for example, `<INSTALL_DIR>/reim/application/templates/reim.properties`, where `<INSTALL_DIR>` is the directory the application installer was unzipped).

Edit the `reim.properties` file to set the properties to the desired values. Then rerun the installer to deploy ReIM.

integration.properties

The below changes need to be done only if WWAV credentials have been enabled for reim during deployment.

The `integration.properties` can be found under

`<WEBLOGIC_DOMAIN_HOME>/retail/<reim app deployment name>/<6m8whs>/reim14.war/WEB-INF/classes/com/retex/reim/integration.properties`

Before changes, the `integration.properties` would look like the below:

```
#webservice provider URL for drill forward
#Drill Forward - start
#webservice.financial.drill.forward=http://hostname.us.oracle.com:18008/fin-DrillBackForwardUrl-AppServiceDecorator/ProxyService/DrillBackForwardUrlAppServiceProxy?wsdl
webservice.financial.drill.forward.wsdl=@deploy.webservice.drill.forward.wsdl@
webservice.financial.drill.forward.url.targetnamespace=@deploy.webservice.drill.forward.url.targetnamespace@
webservice.financial.drill.forward.targetsystem=@deploy.webservice.drill.forward.targetsystem@
```

```
#Drill Forward - end
#webservice provider URL for account validation
webservice.financial.account.validation=http://hostname.us.oracle.com:180
08/fin-GlAccountValidation-
AppServiceDecorator/ProxyService/GlAccountValidationAppServiceProxy?wsdl
webservice.financial.account.validation.namespace=http://www.oracle.com/r
etail/fin/integration/services/GlAccountValidationService/v1
webservice.financial.account.validation.local.code=GlAccountValidationSer
vice
```

After the changes have been made, integration.properties should look like the below:

```
#webservice provider URL for drill forward
#Drill Forward - start
#webservice.financial.drill.forward=@deploy.webservice.drill.forward@
webservice.financial.drill.forward.wsdl=http://hostname.us.oracle.com:180
08/fin-DrillBackForwardUrl-
AppServiceDecorator/ProxyService/DrillBackForwardUrlAppServiceProxy?wsdl
webservice.financial.drill.forward.url.targetnamespace=http://www.oracle.
com/retail/fin/integration/services/DrillBackForwardUrlService/v1
webservice.financial.drill.forward.targetsystem=@deploy.webservice.drill.
forward.targetsystem@
#Drill Forward - end
#webservice provider URL for account validation
webservice.financial.account.validation=http://hostname.us.oracle.com:180
08/fin-GlAccountValidation-
AppServiceDecorator/ProxyService/GlAccountValidationAppServiceProxy?wsdl
webservice.financial.account.validation.namespace=http://www.oracle.com/r
etail/fin/integration/services/GlAccountValidationService/v1
webservice.financial.account.validation.local.code=GlAccountValidationSer
vice
```

Bounce the domain once the changes have been made.

ReIM Batch Scripts

The ReIM application installer configures and installs the batch scripts under <retailhome>/reim-batch.

Example: /u00/projects/j2ee/reim14/rem-batch

The batch scripts are copies of the same generic file. Their file names determine which functionality is run. To run batch scripts, use the alias name provided in the installer when ReIM is installed, the one that is written out to the Java wallet (for example, reim_batchpgmname ADMIN).

For the scripts to run correctly, values for the following variables must be provided:

- ORACLE_HOME: WebLogic Home directory where the ReIM application has been deployed.
- JAVA_HOME: Java 7.0 (1.7.0) JDK installation that typically is being used by the WebLogic Application Server.

Example: export
ORACLE_HOME=/u00/webadmin/product/10.3.6/WLS
export
JAVA_HOME=/u00/webadmin/product/10.3.6/jdk7
export PATH=\$JAVA_HOME/bin:\$PATH

Online Help

The application installer automatically installs Online Help to the proper location. It is accessible from the help links within the application.

Single Sign-On

Skip this section if ReIM is not used within an Oracle Single Sign-On environment.

Note: This section assumes the Oracle WebLogic Server has already been registered with the Oracle Access Manager Webgates. See Oracle Access Manager Webgates documentation for details.

To set up single sign-on, complete the following steps.

1. If you are using Oracle Retail Invoice Matching in an Oracle Single Sign-On environment, then the Invoice Matching root context must be protected. Modify the following files
 - mod_wl_ohs.conf located in
<WEBLOGIC_HOME>/Oracle_WT1/instances/instance1/config/OHS/ohs1
LoadModule weblogic_module
"<WEBLOGIC_HOME>/Oracle_WT1/ohs/modules/mod_wl_ohs.so"
<IfModule weblogic_module>:q!vi
 WebLogicHost host name
 WebLogicPort admin port number
 MatchExpression *.jsp
</IfModule>
<Location /reim >
 SetHandler weblogic-handler
</Location>

Adding New Users To ReIM – Manually (after ReIM has been installed)


When the ReIM installation has been completed you are able to Login to ReIM by using the Admin user (RETAIL.USER) created in the section: Configure LDAP Authentication Pre-Installation Steps (Initial Login to ReIM).

In order to have more users that are able to Login to ReIM, you need to create the new users by following these post-installation steps.

1. Create the new user who will have access to ReIM (ex: RETAIL.USER1)
 - a. Create user named "retail.user1" by going to dc=com,dc=oracle,dc=us,cn=Users and enter the following:
cn=RETAIL.USER1.user,cn=Users,dc=us,dc=oracle,dc=com
Record the password you entered, so that you know it all the time.
 - b. The following additional attributes are needed to Login to ReIM:
 - Preferred Country: US
 - Preferred Language: en

c. Click **Apply**.

After applying the changes, your screen should look similar to the following:

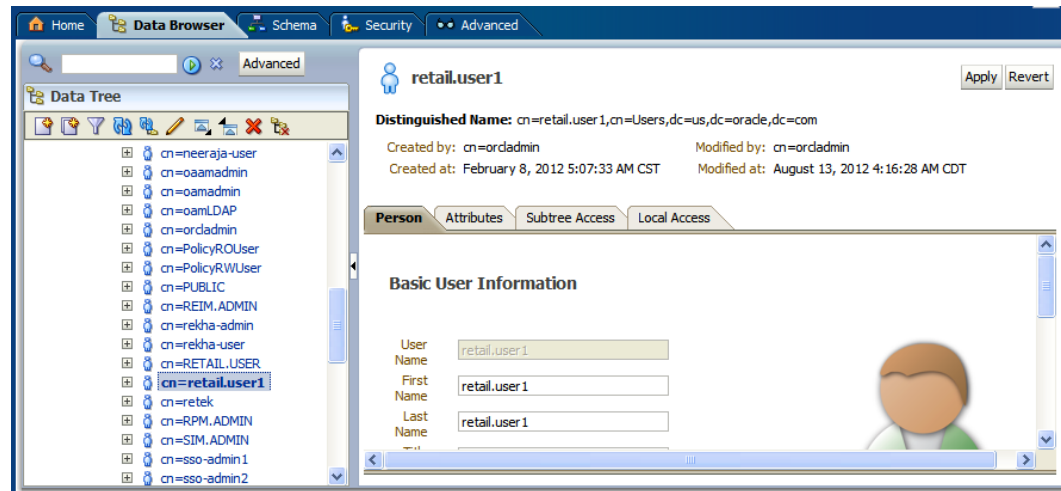


2. Assign user "RETAIL.USER1" as member of "reim" Group

- a. Go to cn=reim,cn=groups,dc=us,dc=oracle,dc=com on the right of the screen. Locate the Members section and add the user:

cn=retail.user1,cn=users,dc=us,dc=oracle,dc=com

After applying the changes, your screen should look similar to the following:

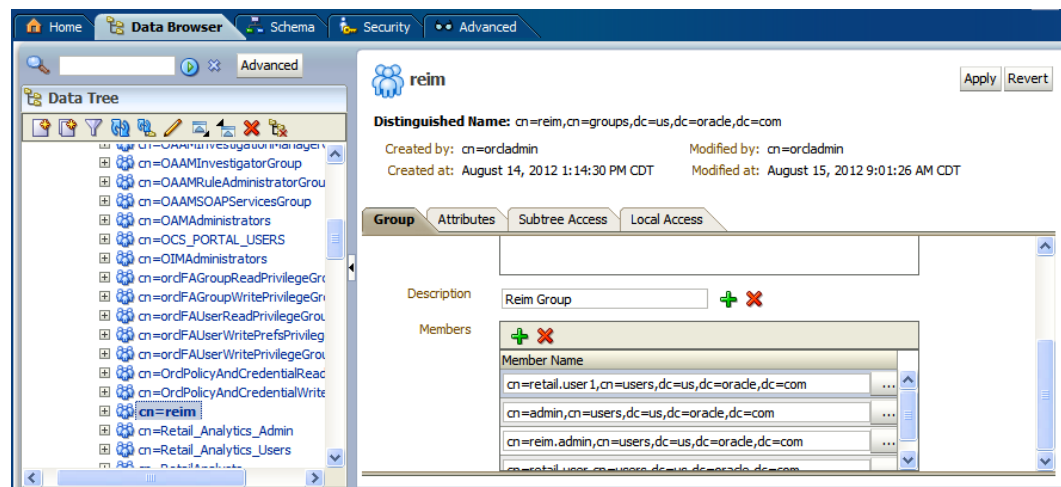

3. Add the new user to the ReIM database table im_business_role_member.

- a. You add the new user and assign to the new user a ReIM role, by entering this SQL command:

```
insert into im_business_role_member
(USER_ID, BUSINESS_ROLE_ID)
values ('RETAIL.USER1', 9000);
```

After applying the changes, your screen should look similar to the following:

The screenshot shows the Oracle SQL Developer interface. On the left, a tree view displays the database schema, with 'IM_BUSINESS_ROLE_MEMBER' selected. The main pane shows the 'Data' tab for this table. The table has two columns: 'USER_ID' and 'BUSINESS_ROLE_ID'. The data is as follows:

USER_ID	BUSINESS_ROLE_ID
1 ADMIN	9000
2 ALAIN.FRECON	9000
3 DEMO1	9000
4 DEMO2	9000
5 DEMO3	9000
6 DEMO4	9000
7 DEMO5	9000
8 DEMO6	9000
9 LIMPRIV	9000
10 RETAIL.USER	9000
11 mihir.parekh	9000
12 noah	9000
+13 RETAIL.USER1	9000
-14	

- The new user "RETAIL.USER1" should be able to Login to ReIM now. Follow the same procedure for any additional users that need to have access to ReIM.


Configuring BIPublisher for REIM

Note: This section is not required if BIPublisher has been configured as part of RMS Installation.

1. Login with the credentials you entered in your Oracle BI EE configuration (weblogic / password). Example URL: [http://\[obiee_host\]:\[obiee_server_port\]/xmlpserver](http://[obiee_host]:[obiee_server_port]/xmlpserver)



2. Configure the BI Publisher repository. After signon, select “Administration”.

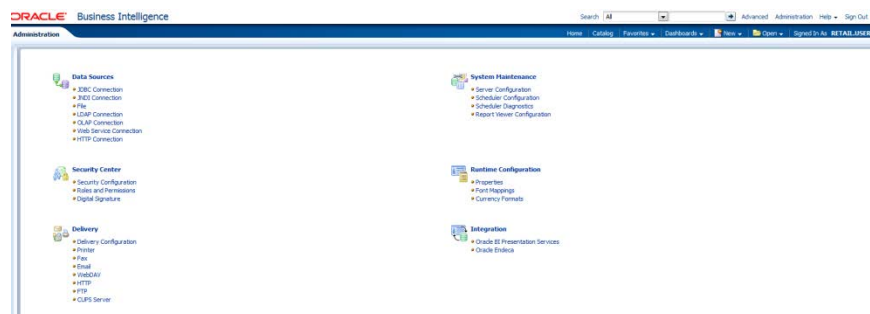

3. On the System Maintenance Section, click Server Configuration

4. Navigate to the Configuration Screen.


The screenshot shows the Oracle Business Intelligence Administration console. The 'Administration' tab is selected. Under 'System Maintenance', the 'Server Configuration' sub-tab is active. A tip states: 'Any changes will only take effect after the application is restarted.' The 'Configuration Folder' section indicates that the Configuration Repository contains all configurations, security, datasources, etc. The path field is populated with: `/u00/webadmin/product/fmw/wls_obieEBI/user_projects/domains/bifoundation_domain/`. The 'Catalog' section states that the Catalog contains all content such as reports and data models. The 'Catalog Type' dropdown is set to 'Oracle BI Publisher - File System'. Its path field is also populated with: `/u00/webadmin/product/fmw/wls_obieEBI/user_projects/domains/bifoundation_domain/`. The 'General Properties' section shows fields for 'System Temporary Directory', 'Report Scalable Threshold', and 'Database Fetch Size', all of which are currently empty.

5. On this screen on the Configuration Folder section, enter the path to your repository. On the Catalog section enter Catalog Type: Oracle BI Publisher – File System from the drop down menu.


This is the path you entered in the Configuration Section and Catalog Section:

`$MIDDLEWARE_HOME/user_projects/domains/bifoundation_domain/config/bipublisher/repository`

6. Restart the BI Publisher after this change.
7. Set BiPublisher security model.

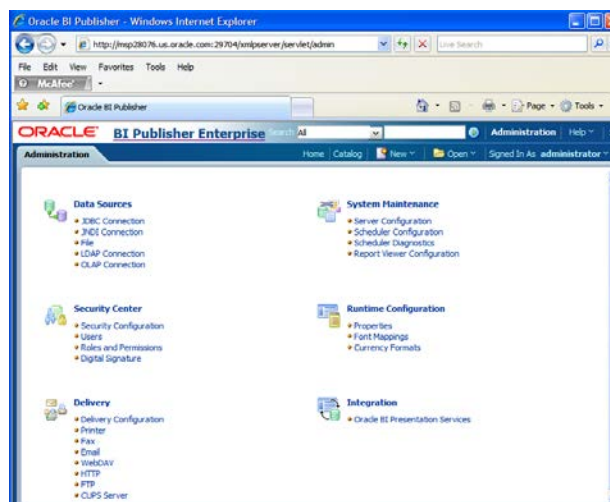

- a. On the BiPublisher 11g Administration Screen, click Security Configuration from the Security Center.

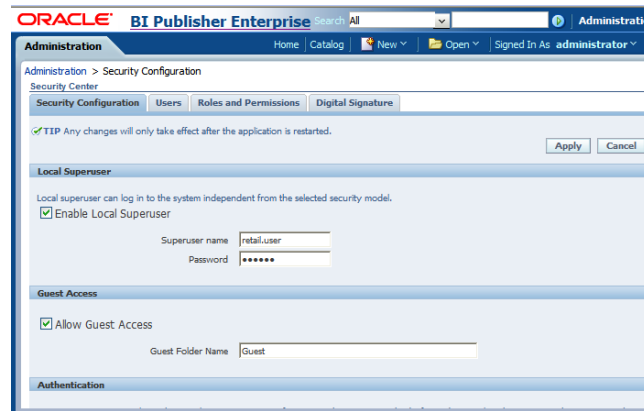

- b. Enable a superuser by checking the “Enable Local SuperUser” box and by entering name and password on the corresponding fields on this screen.
- c. Mark “Allow Guest Access” check box. Enter “Guest” as Guest Folder Name
- d. Scroll down the screen and locate the Authorization section:



- e. Select BI Publisher Security from the Security Model list.
- f. The default user name for the BI Publisher Security Model is Administrator
- g. On the password text field, enter a value that you can remember. It is going to be the password for Login to xmlpserver.
- h. Save the changes and re-start the BIPublisher server.

- i. Launch xmlpserver. To Login you must use the new credentials that you set up in the former step: Username: Administrator Password: password.

Note: You will not be able to login to xmlpserver as weblogic any more because we have already changed the Security Model.



8. Set the repository path.

Example:

/u00/webadmin/product/10.3.X/WLS/user_projects/domains/bifoundation_domain/config/bipublisher/repository In the Oracle BI EE file system you will find the repository in the following location:

\$OBIEE/wls/user_projects/domains/bifoundation_domain/config/bipublisher/repository


In the repository you will see the following directories:

- Admin
- DemoFiles
- Reports
- Tools
- Users


9. Create role Bipub_default_role.
 - a. From the xmlpserver Administration screen, scroll down to Security Center and click Roles and Permissions.




- b. On the Roles and Permissions screen, click the Create Role button.

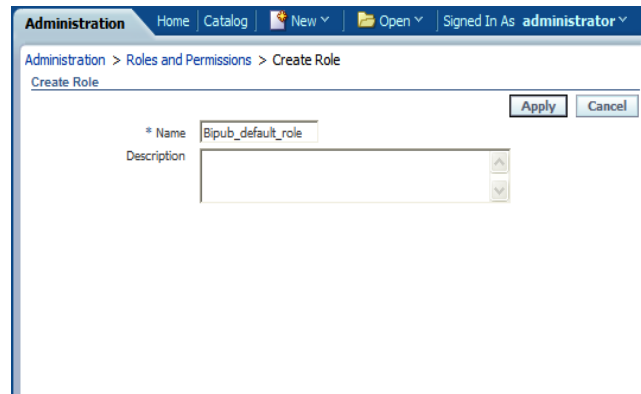

- c. Create the Bipub_default_role. Enter in Create Role Section name of the role.
 - d. When the information has been entered press Apply changes.
10. Assign BiPub system roles to the newly created Bipub_default_role.
 - a. To assign BiPub system roles to the newly create Bipub_default_role, go to Security Center section and navigate to the Roles and Permissions screen:

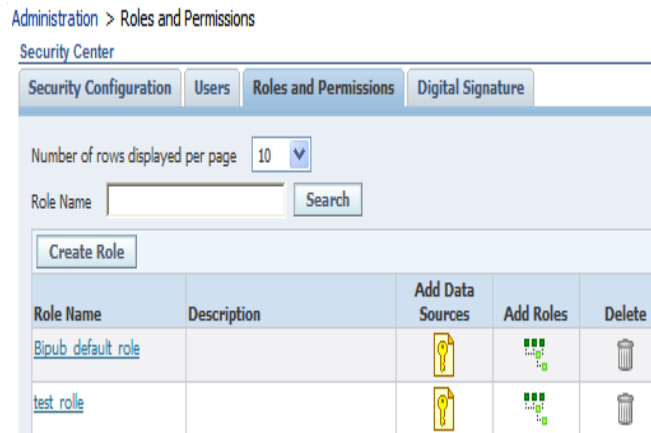

- b. On the Roles and Permissions screen you should see the new role created: “Bipub_default_role”. Add multiple roles to the Bipub_Default_Role by pressing the corresponding green icon on the Add Roles column.

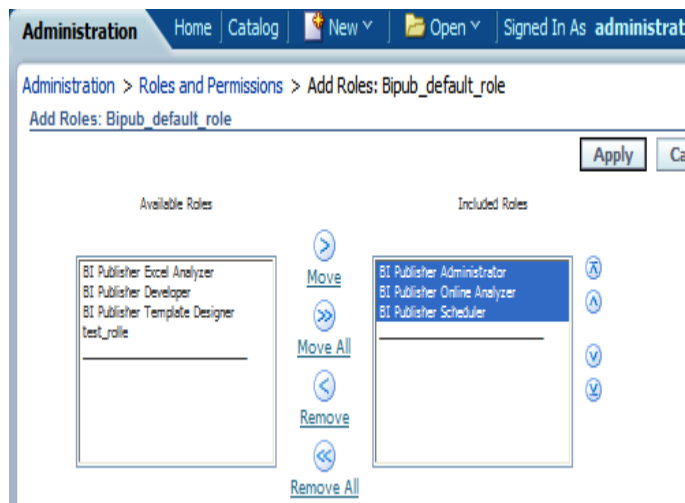

- c. From the Available Roles panel, select the ones needed for your reports and click **Move** to move them to the Included Roles panel.
- d. Click **Apply** to save your changes.

11. Create Guest (XMLP_GUEST) user.



- a. From the xmlpserver Administration screen scroll down to Security Center section and click **Users** to navigate to the next screen.

Administration > Users

Security Center

Security Configuration Users Roles and Permissions Digital Signature

Number of rows displayed per page 10

Username Search

Create User

Username	Assign Roles	Delete
administrator		
xmlp_quest		

- b. Click **Create User** to create the “xmlp_guest” user and save the changes.
12. Adding the Bipub_default_role to XMLP_GUEST user.
- a. Open the Users section.

Administration > Users

Security Center

Security Configuration Users Roles and Permissions Digital Signature


Number of rows displayed per page 10

Username Search

Create User

Username	Assign Roles
administrator	
xmlp_quest	

- b. For xmlp_guest user, click the Assign Roles icon to navigate to the next screen.

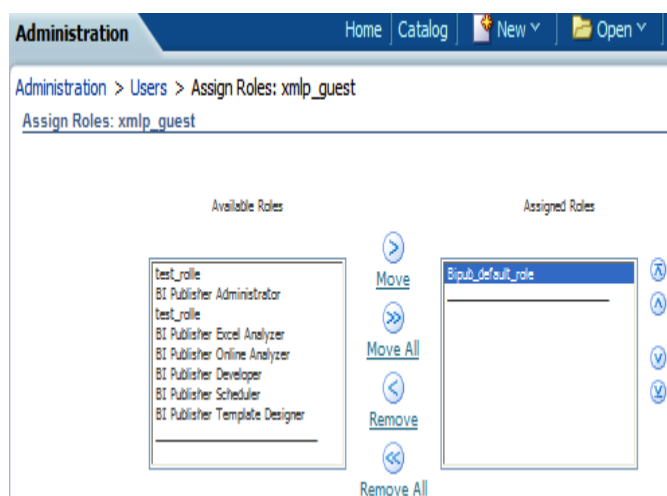

- c. On the Assign Roles screen, select the BiPub_default_role from the Available Roles panel and click Move to move it to the Assigned Roles panel. Click **Apply** to save your changes.

13. Create folders. Complete the following steps.


- a. Create the “Guest” and “REIM” directories on the server. Change directories into these directories and verify that the new folders have the 755 permission. Example assuming that /u00/webadmin is the root of the installation:

```
cd
/u00/webadmin/product/10.3.X/WLS/user_projects/domains/bifoundation_domain
/config/bipublisher/repository/Reports
mkdir
/u00/webadmin/product/10.3.X/WLS/user_projects/domains/bifoundation_domain
/config/bipublisher/repository/Reports/Guest
cd Guest
mkdir
/u00/webadmin/product/10.3.X/WLS/user_projects/domains/bifoundation_domain
/config/bipublisher/repository/Reports/Guest/REIM
```

Configuring the RMS JDBC connection

Follow the below steps to configure JDBC connection for RMS Data Source name. This is the data source that REIM uses for REIM reports.


1. Log on with the default user ID and passwords for BI Publisher using the administrative user and password configured previously.
2. Click the **Administration** tab and select the **JDBC Connection** hyperlink in the Data Sources lists. The following screen is displayed. Click **Add Data Source**.

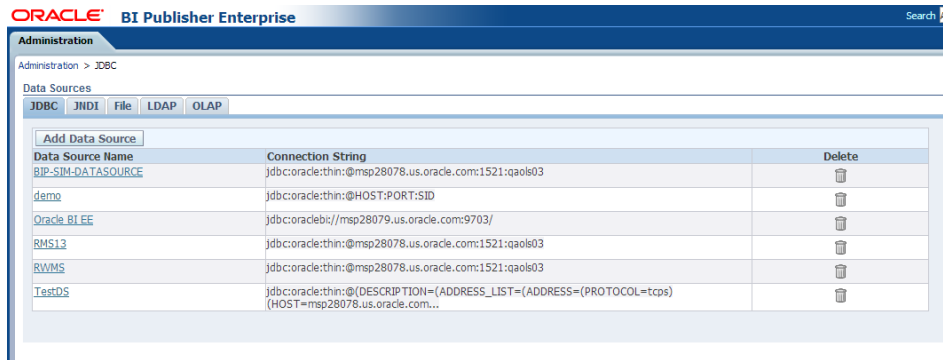


- Enter **RMS** for the datasource name (datasource MUST be RMS as the xdm file has code pointing at a datasource named RMS), and enter the appropriate details for the RMS data source. Once the data is entered, click **Test Connection** to test the connection.

The syntax for connection is jdbc:oracle:thin:@<hostname>:<port>/<servicename>

For example: jdbc:oracle:thin:@hostname.example:1521/servicename

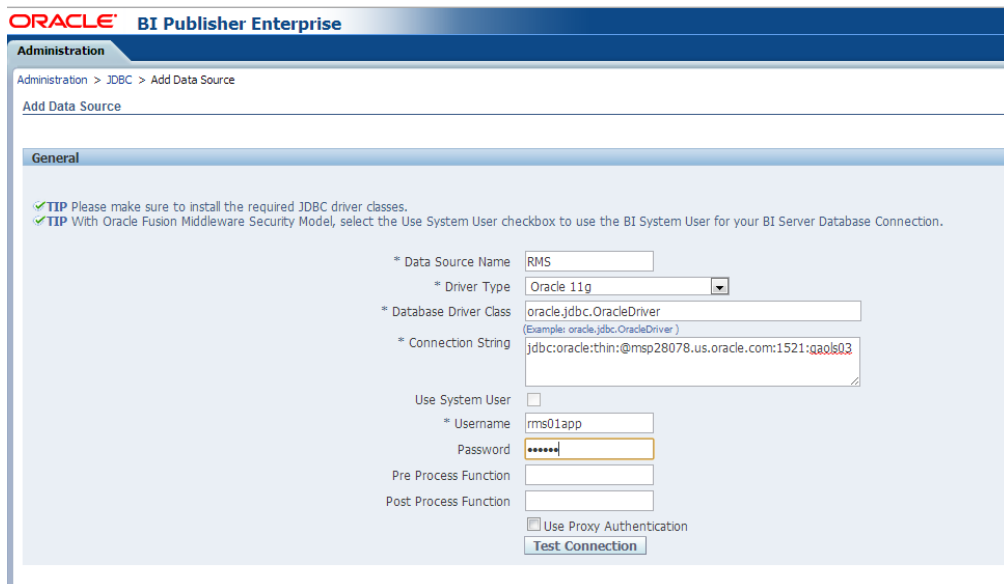

- Ensure that Allow Guest Access is checked in the Security Section.

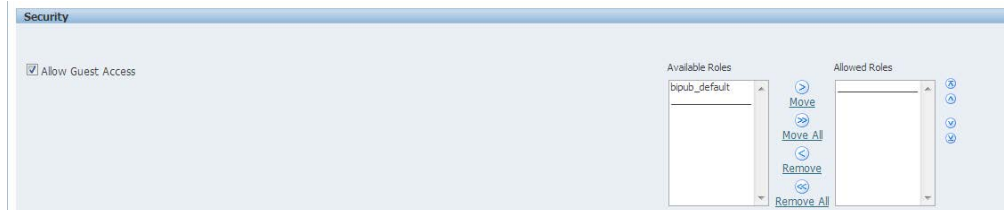

- Click **Apply** to save the information.

Data Migration

ReIM includes a data conversion script that allows you to move old EDI data (reject to table) to the new injector table structure from 14.0.1 to 14.1.1. This new script and database package includes logic to move data from the old IM_EDI_REJECT% table to the new IM_INJECTOR% tables so that the user can continue working on any documents that were rejected to table before the upgrade.

The script is available in the same directory as other ReIM batch scripts.

Usage

```
dataConversionEDIUpgrade <db_connect_string> <doc_create_username> <default_loc>
<default_dept> <default_class> <include_date_for_doc_dup_check[Y or N]>
<include_year_for_doc_dup_check[Y or N]> <doc_hdr_qty_req[Y or N]> errpath
```

Parameters

db_connect_string	Database connect String
doc_create_username	The batch username (will be used as create_id if at all any document passes validation)
default_loc	edi.default.location from reim.properties
default_dept	edi.default.department from reim.properties
default_class	edi.default.class from reim.properties
include_date_for_doc_dup_check[Y or N]	INCLUDE_DOC_DATE_FOR_DUPLICATE_DOC_CHECK from reim.properties (Y N)
include_year_for_doc_dup_check[Y or N]	INCLUDE_DOC_YEAR_FOR_DUPLICATE_DOC_CHECK from reim.properties (Y N)
doc_hdr_qty_req[Y or N]	document.header.quantity.required from reim.properties (Y N)
errpath	Error File directory

Error and Restart

The script would create errors in the error path if there were any. The user can rerun the script after correcting the reason for failure.

Locking

If the run is successful, the script creates a lock file which would prevent the user from running the upgrade script again. The user can delete the lock file if they need to override and rerun the script for any reason. (Not recommended, since all the documents which got uploaded to IM% tables from previous runs would get rejected as DUPLICATES)

Since this is a data conversion mechanism, it does not perform a reject to file. Users need to go through the errors in IM_INJECT_DOC_ERROR table to check if there are any documents that were earlier part of IM EDI_REJECT% tables and have now been classified as reject to file. (FIXABLE = 'N' in IM_INJECT_DOC_ERROR)

Patching Procedures

Oracle Retail Patching Process

The patching process for many Oracle Retail products has been substantially revised from prior releases. Automated tools are available to reduce the amount of manual steps when applying patches. To support and complement this automation, more information about the environment is now tracked and retained between patches. This information is used to allow subsequent patches to identify and skip changes which have already been made to the environment. For example, the patching process uses a database manifest table to skip database change scripts which have already been executed.

The enhanced product patching process incorporates the following:

- Utilities to automate the application of Oracle Retail patches to environments.
- Unified patches so that a single patch can be applied against Database, Forms, Java applications, Batch, etc. installations.
- Database and Environment manifests track versions of files at a module level.
- Centralized configuration distinguishes installation types (Database, Forms, Java, Batch, etc.).
- Patch inventory tracks the patches applied to an environment.

These enhancements make installing and updating Oracle Retail product installations easier and reduce opportunities for mistakes. Some of these changes add additional considerations to patching and maintaining Oracle Retail product environments. Additional details on these considerations are found in later sections.

Supported Products and Technologies

With version 14.1.1, several additional products and technologies are supported by the enhanced patching process. The utilities, processes and procedures described here are supported with the following products and listed technologies:

Product	Supported Technology
Oracle Retail Merchandising System (RMS)	▪ Database scripts ▪ Batch scripts ▪ RETL scripts ▪ Data Conversion Scripts ▪ Forms ▪ BI Publisher Reports
Oracle Retail Warehouse Management System (RWMS)	▪ Database scripts ▪ Batch scripts ▪ Forms ▪ BI Publisher Reports

Product	Supported Technology
Oracle Retail Price Management (RPM)	- Database scripts (included with RMS) - Java Application - Batch scripts
Oracle Retail Invoice Matching (ReIM)	- Database scripts (included with RMS) - Java Application - Batch scripts
Oracle Retail Allocation	- Database scripts (included with RMS) - Java Application - Batch scripts
Oracle Retail Sales Audit (ReSA)	- Database scripts (included with RMS) - Java Application
Oracle Retail Analytics (RA)	Database scripts
Oracle Retail Advanced Science Engine (ORASE)	- Database scripts - Batch scripts
Oracle Retail Application Security Role Manager (RASRM)	Java Application

Patch Concepts

During the lifecycle of an Oracle Retail environment, patches are applied to maintain your system. This maintenance may be necessary to resolve a specific issue, add new functionality, update to the latest patch level, add support for new technologies, or other reasons.

A patch refers to a collection of files to apply to an environment. Patches could be cumulative, such as the 14.1.0 or 14.1.1 release, or incremental, such as a hot fix for just a few modules. Patches may contain updates for some or all components of a product installation including database, application code, forms, and batch. In a distributed architecture the same patch may need to be applied to multiple systems in order to patch all of the components. For example, if a patch contains both database and application changes, the patch would need to be applied to both the database server and the application server.

The top-level directory for the installation of an Oracle Retail product is referred to as the RETAIL_HOME. Underneath RETAIL_HOME are all of the files related to that product installation, as well as configuration and metadata necessary for the Oracle Retail Patch Assistant to maintain those files. In some cases the runtime application files also exist under RETAIL_HOME. For example, the compiled RMS forms, compiled RMS batch files, or Java Application batch scripts.

Patching Utility Overview

Patches are applied and tracked using utilities that are specifically designed for this purpose. The primary utility is described briefly below and additional information is available in later sections.

Oracle Retail Patch Assistant (ORPatch)

ORPatch is the utility used to apply patches to an Oracle Retail product installation. It is used in the background by the installer when creating a new installation or applying a cumulative patch. It is used directly to apply an incremental patch to an environment.

Oracle Retail Merge Patch (ORMerge)

ORMerge is a utility to allow multiple patches to be combined into a single patch. Applying patches individually may require some steps to be repeated. Merging multiple patches together allows these steps to be run only once. For example, applying several incremental patches to database packages will recompile invalid objects with each patch. Merging the patches into a single patch before applying them will allow invalid objects to be recompiled only once.

Oracle Retail Compile Patch (ORCompile)

ORCompile is a utility to compile components of Oracle Retail products outside of a patch. It allows RMS Forms, RMS Batch, and RWMS Forms to be fully recompiled even if no patch has been applied. It also contains functionality to recompile invalid database objects in product schemas.

Oracle Retail Deploy Patch (ORDeploy)

ORDeploy is a utility to deploy components of Oracle Retail Java products outside of a patch. It allows RPM, ReIM, Allocation and ReSA java applications to be redeployed to WebLogic even if a patch has not been applied. It contains functionality to optionally include or not include Java customizations when redeploying.

Changes with 14.1

Many products and technologies are supported by the enhanced patching process for the first time in 14.1. In those cases all of the content in this chapter is new with 14.1.

MMHOME changed to RETAIL_HOME

For RMS and RWMS, which were previously supported in 14.0, there is a change when using ORPatch and related tools. Previously the MMHOME environment variable was used to refer to the RMS and RWMS installation area. Starting with 14.1, RETAIL_HOME is now used to refer to the installation area. So where previously it was necessary to set MMHOME before executing ORPatch, you must now set RETAIL_HOME.

Note: RMS Batch continues to use MMHOME to refer to the area where batch is installed, and requires it to be set when executing batches. The change to using RETAIL_HOME relates only to ORPatch and related utilities.

Java batch script location

For Java products with batch scripts, starting with 14.1 the location of batch scripts has been changed to \$RETAIL_HOME/<app>-batch. Previously batch scripts were stored

within the WebLogic domain in the retail directory. Credential store files continue to be stored within the WebLogic domain.

Patching Considerations

Patch Types

Oracle Retail produces two types of patches for their products: cumulative and incremental.

Cumulative Patches

A cumulative patch includes all of the files necessary to patch an environment to a specific level or build a new environment at that level. Examples of cumulative patches would be 14.1.1, 14.1.2, and so on. Cumulative patches come with a standard Oracle Retail installer and so can be applied to an environment with the installer rather than with ORPatch or other utilities.

Incremental Patches

An incremental patch includes only selected files necessary to address a specific issue or add a feature. Examples of incremental patches would be a hot fix for a specific defect. Incremental patches do not include an installer and must be applied with ORPatch.

Incremental Patch Structure

An Oracle Retail incremental patch generally contains several files and one or more subdirectories. The subdirectories contain the contents of the patch, while the individual files contain information about the patch and metadata necessary for patching utilities to correctly apply the patch. The most important files in the top-level directory are the README.txt, the manifest files.

README File

The README.txt file contains information about the incremental patch and how to apply it. This may include manual steps that are necessary before, after or while applying the patch. It will also contain instructions on applying the patch with ORPatch.

Manifest Files

Each patch contains manifest files which contain metadata about the contents of a patch and are used by ORPatch to determine the actions necessary to apply a patch. Patches should generally be run against all installations a product in an environment, and ORPatch will only apply the changes from the patch that are relevant to that installation.

Note: Cumulative patches use a different patch structure because they include a full installer which will run ORPatch automatically.

Version Tracking

The patching infrastructure for 14.1 tracks version information for all files involved with a product installation. The RETAIL_HOME now contains files which track the revision of all files within the RETAIL_HOME including batch, forms, database, Java archives and other files. In addition, records of database scripts that have been applied to the product database objects are kept within each database schema.

Apply all Patches with Installer or ORPatch

In order to ensure that environment metadata is accurate all patches must be applied to the Oracle Retail product installation using patching utilities. For cumulative patches this is done automatically by the installer. For incremental patches ORPatch must be used directly. This is especially important if database changes are being applied, in order to ensure that the database-related metadata is kept up-to-date.

Environment Configuration

A configuration file in \$RETAIL_HOME/orpatch/config/env_info.cfg is used to define the details of a specific Oracle Retail environment. This file defines:

- The location of critical infrastructure components such as the ORACLE_HOME on a database or middleware server.
- The location of Oracle Wallets to support connecting to the database users.
- The type of file processing which is relevant to a particular host. For example, if this is a host where database work should be done, or a host where batch compilation should be done, a host where Java applications should be deployed, etc. This allows a single database, forms and batch patch to be run against all types of hosts, applying only the relevant pieces on each server.
- Other configuration necessary to determine proper behavior in an environment.

Retained Installation Files

The RETAIL_HOME location of an Oracle Retail product installation contains all of the files associated with that installation. This can include database scripts, Java files, Forms, Batch, RETL and Data Conversion files as with previous versions and also includes all database scripts. This allows objects to be reloaded during patching, including any necessary dependencies.

Reloading Content

In order to ensure that database contents and generated files exactly match patched versions, when applying cumulative patches some content is regenerated even if it does not appear to have changed.

On a cumulative patch this includes:

- All re-runnable database content will be reloaded
 - Packages and Procedures
 - Database Types (excluding RIB objects)
 - Control scripts
 - Triggers
 - WebService jars and packages
 - Form Elements
- All RMS and RWMS forms files will be recompiled
- All RMS batch files will be recompiled

When applying incremental patches, only changed files will be reloaded. However this does not apply to RMS batch, which is fully recompiled with any change.

Java Hotfixes and Cumulative Patches

When applying cumulative patches to Java applications components with ORPatch, all hotfixes related to base product ear files included with the patch will be rolled back. This increases the likelihood of a successful deployment because hotfixes may not be compatible with updated product ear files, or may already be included with the ear. Before applying a cumulative patch to Java applications, check the patch documentation to determine which hotfixes are not included in the ear. Then work with Oracle Support to obtain compatible versions of the fixes for the updated ear version. In some cases this may be the same hotfix, in which case it can be re-applied to the environment. In other cases a new hotfix may be required.

Backups

Before applying a patch to an environment, it is extremely important to take a full backup of both the RETAIL_HOME file system and the Oracle Retail database. Although ORPatch makes backups of files modified during patching, any database changes cannot be reversed. If a patch fails which contains database changes, and cannot be completed, the environment must be restored from backup.

Disk Space

When patches are applied to an environment, the old version of files which are updated or deleted are backed up to \$RETAIL_HOME/backups/backup-**<timestamp>**. When applying large patches, ensure there is sufficient disk space on the system where you unzip the patch or the patching process may fail. Up to twice as much disk space as the unzipped patch may be required during patching.

In addition to backups of source files, the existing compiled RMS or RWMS Forms and RMS Batch files are saved before recompilation. These backups may be created during patches:

- Batch 'lib' directory in \$RETAIL_HOME/oracle/lib/bin-**<timestamp>**
- Batch 'proc' directory in \$RETAIL_HOME/oracle/proc/bin-**<timestamp>**
- Forms 'toolset' directory in \$RETAIL_HOME/base/toolset/bin-**<timestamp>**
- Forms 'forms' directory in \$RETAIL_HOME/base/forms/bin-**<timestamp>**

Periodically both types of backup files can be removed to preserve disk space.

Patching Operations

Running ORPatch

ORPatch is used to apply patches to an Oracle Retail product installation. When applying a patch which includes an installer, ORPatch does not need to be executed manually as the installer will run it automatically as part of the installation process. When applying a patch that does not include an installer, ORPatch is run directly.

ORPatch performs the tasks necessary to apply the patch:

- Inspects the patch metadata to determine the patch contents and patch type.
- Reads the environment configuration file to determine which product components exist in this installation.
- Assembles a list of patch actions which will be run on this host to process the patch.
- Executes pre-checks to validate that all patch actions have the necessary configuration to proceed.
- Compares version numbers of files from the patch against the files in the environment.
- Backs up files which will be updated.
- Copies updated files into the installation.
- Loads updated files into database schemas, if applicable.
- Recompiles RMS batch, if applicable.
- Recompiles RMS forms, if applicable.
- Constructs updated Java archives and deploys them to WebLogic, if applicable
- Updates Java batch files and libraries, if applicable
- Records the patch in the patch inventory.

If a patch does not contain updated files for the database or system, no action may be taken. If a previously failed ORPatch session is discovered, it will be restarted.

Preparing for Patching

Before applying a patch to your system, it is important to properly prepare the environment.

Single Patching Session

It is extremely important that only a single ORPatch session is active against a product installation at a time. If multiple patches need to be applied, you can optionally merge them into a single patch and apply one patch to the environment. Never apply multiple patches at the same time.

Shutdown Applications

If a patch updates database objects, it is important that all applications are shutdown to ensure no database objects are locked or in use. This is especially important when applying changes to Oracle Retail Integration Bus (RIB) objects as types in use will not be correctly replaced, leading to “ORA-21700: object does not exist or marked for delete” errors when restarting the RIB.

Backup Environment

Before applying a patch to an environment, it is important to take a full backup of both the RETAIL_HOME file system and the retail database. Although ORPatch makes

backups of files modified during patching, any database changes cannot be reversed. If a patch which contains database changes fails and cannot be completed, the environment must be restored from backup.

Log Files

When applying a patch, ORPatch will create a number of log files which contain important information about the actions taken during a patch and may contain more information in the event of problems. Log files are created in the \$RETAIL_HOME/orpatch/logs directory. Logs should always be reviewed after a patch is applied.

After a patch session the log directory will contain at a minimum an ORPatch log file and may also contain other logs depending on the actions taken. The following table describes logs that may exist.

Log File	Used For
orpatch-<date>-<time>.log	Primary ORPatch log file
detail_logs/dbsql_<component>/invalids/*	Details on the errors causing a database object to be invalid
detail_logs/analyze/details	Detail logs of files that will be created/updated/removed when a patch is applied
detail_logs/compare/details	Detail logs of the differences between two sets of environment metadata
orpatch_forms_<pid>_child_<num>.log	Temporary logs from a child process spawned to compile forms in parallel. After the child process completes, the contents are append to the primary orpatch log file
detail_logs/forms/rms_frm_toolset/*	Detail logs of the compilation of each RMS Toolset file
detail_logs/forms/rms_frm_forms/*	Detail logs of the compilation of each RMS Forms file
detail_logs/rmsbatch/lib/*	Detail logs of the compilation of RMS Batch libraries
detail_logs/rmsbatch/proc/*	Detail logs of the compilation of RMS Batch programs
detail_logs/dbsql_rms/rms_db_ws_consumer_jars/*	Detail logs of the loadjava command to install RMS WebService Consumer objects
detail_logs/dbsql_rms/rms_db_ws_consumer_libs/*	Detail logs of the loadjava command to install RMS WebService Consumer libraries
detail_logs/forms/rwms_frm_forms/*	Detail logs of the compilation of each RWMS Forms file
detail_logs/dbsql_rwms/rwms_db_sp_jars/*	Detail logs of the loadjava command to install RWMS SP jars

Log File	Used For
detail_logs/javaapp_<product>/deploy/*	Detail logs of the deploy of a Java product

Unzip Patch Files

Before executing ORPatch, the patch files must be unzipped into a directory. This directory will be passed to ORPatch as the “-s <source directory>” argument on the command-line when applying or analyzing a patch.

Location of ORPatch

The ORPatch script will be located in \$RETAIL_HOME/orpatch/bin.

Command Line Arguments

ORPatch behavior is controlled by several command-line arguments. These arguments may be actions or options. Command and option names can be specified in upper or lower case, and will be converted to upper-case automatically. Arguments to options, for example the source directory patch, will not be modified.

ORPatch command-line actions:

Action	Description
apply	Tells ORPatch to apply a patch, requires the -s option Example: orpatch apply -s \$RETAIL_HOME/stage/patch123456
analyze	Tells ORPatch to analyze a patch, requires the -s option Example: orpatch analyze -s \$RETAIL_HOME/stage/patch123456
lsinventory	Tells ORPatch to list the inventory of patches that have been applied to this installation
exportmetadata	Tells ORPatch to extract all metadata information from the environment and create a \$RETAIL_HOME/support directory to contain it. Requires the -expname option.
diffmetadata	Tells ORPatch to compare all metadata from the current environment with metadata exported from some other environment. Requires the -expname and -srcname options.
revert	Tells ORPatch to revert the files related to a patch, requires the -s option Example: orpatch revert -s \$RETAIL_HOME/backups/backup-09302013-153010

Note: An action is required and only one action can be specified at a time.

ORPatch command-line arguments:

Argument	Valid For Actions	Description
-s <source dir>	apply analyze	Specifies where to find the top-level directory of the patch to apply or analyze. The source directory should contain the manifest.csv and patch_info.cfg files.

Argument	Valid For Actions	Description
-new	apply	Forces ORPatch to not attempt to restart a failed ORPatch session
-expname	exportmetadata diffmetadata lsinventory	Defines the top-level name to be used for the export or comparison of environment metadata. When used with lsinventory, it allows an exported inventory to be printed.
-srcname	diffmetadata	Defines the 'name' to use when referring to the current environment during metadata comparisons.
-dbmodules	diffmetadata	When comparing metadata at a module-level, compare the dbmanifest information rather than the environment manifest. This method of comparing metadata is less accurate as it does not include non-database files.
-jarmodules	analyze diffmetadata	When used with analyze, requests a full comparison of the metadata of Java archives included in the patch versus the metadata of the Java archives in the environment. This behavior is automatically enabled when Java customizations are detected in the environment. Analyzing the contents of Java archives allows for detailed investigation of the potential impacts of installing a new Java ear to an environment with customizations. When used with diffmetadata, causes metadata to be compared using jarmanifest information rather than the environment manifest. This provides more detailed information on the exact differences of the content of Java archives, but does not include non-Java files.
-selfonly	apply analyze	Only apply or analyze changes in a patch that relate to orpatch itself. This is useful for applying updates to orpatch without applying the entire patch to an environment.
-s <backup dir>	revert	Specifies the backup from a patch that should be reverted to the environment. This restores only the files modified during the patch, the database must be restored separately or the environment will be out-of-sync and likely unusable.

Analyzing the Impact of a Patch

In some cases, it may be desirable to see a list of the files that will be updated by a patch, particularly if files in the environment have been customized. ORPatch has an 'analyze' mode that will evaluate all files in the patch against the environment and report on the files that will be updated based on the patch.

To run ORPatch in analyze mode, include 'analyze' on the command line. It performs the following actions:

- Identifies files in the environment which the patch would remove.
- Compares version numbers of files in the patch to version numbers of files in the environment.

- Prints a summary of the number of files which would be created, updated or removed.
- Prints an additional list of any files that would be updated which are registered as being customized.
- Prints an additional list of any files which are in the environment and newer than the files included in the patch. These files are considered possible conflicts as the modules in the patch may not be compatible with the newer versions already installed. If you choose to apply the patch the newer versions of modules in the environment will NOT be overwritten.
- If a Java custom file tree is detected, prints a detailed analysis of the modules within Java ear files that differ from the current ear file on the system.
- Saves details of the files that will be impacted in `$RETAIL_HOME/orpatch/logs/detail_logs/analyze/details`.

This list of files can then be used to assess the impact of a patch on your environment.

To analyze a patch, perform the following steps:

1. Log in as the UNIX user that owns the product installation.
2. Set the RETAIL_HOME environment variable to the top-level directory of your product installation.
`export RETAIL_HOME=/u00/oretail/14.1/tst`
3. Set the PATH environment variable to include the orpatch/bin directory
`export PATH=$RETAIL_HOME/orpatch/bin:$PATH`
4. Set the JAVA_HOME environment variable if the patch contains Java application files.
`export JAVA_HOME=/u00/oretail/java_jdk`

Note: If the JAVA_HOME environment variable is not specified, the value from `RETAIL_HOME/orpatch/config/env_info.cfg` will be used.

5. Create a staging directory to contain the patch, if it does not already exist.
`mkdir -p $RETAIL_HOME/stage`
6. Download the patch to the staging directory and unzip it.
7. Execute orpatch to analyze the patch.
`orpatch analyze -s $RETAIL_HOME/stage/patch123456`
8. Repeat the patch analysis on all servers with installations for this product environment.
9. Evaluate the list(s) of impacted files.

For more information on registering and analyzing customizations, please see the Customization section later in this document.

Applying a Patch

Once the system is prepared for patching, ORPatch can be executed to apply the patch to the environment. The patch may need to be applied to multiple systems if it updates components that are installed on distributed servers.

To apply a patch, perform the following steps:

1. Log in as the UNIX user that owns the product installation.
2. Set the RETAIL_HOME environment variable to the top-level directory of your product installation.
`export RETAIL_HOME=/u00/oretail/14.1/tst`

3. Set the PATH environment variable to include the orpatch/bin directory
export PATH=\$RETAIL_HOME/orpatch/bin:\$PATH
4. Set the DISPLAY environment variable if the patch contains Forms.
export DISPLAY=localhost:10.0

Note: If the DISPLAY environment variable is not specified, the value from RETAIL_HOME/orpatch/config/env_info.cfg will be used.

5. Set the JAVA_HOME environment variable if the patch contains Java application files.
export JAVA_HOME=/u00/oretail/java_jdk

Note: If the JAVA_HOME environment variable is not specified, the value from RETAIL_HOME/orpatch/config/env_info.cfg will be used.

6. Create a staging directory to contain the patch, if it does not already exist.
mkdir -p \$RETAIL_HOME/stage
7. Download the patch to the staging directory and unzip it.
8. Review the README.txt included with the patch. If manual steps are specified in the patch, execute those steps at the appropriate time.
9. Shutdown applications.
10. Execute ORPatch to apply the patch.
orpatch apply -s \$RETAIL_HOME/stage/patch123456
11. After ORPatch completes, review the log files in \$RETAIL_HOME/orpatch/logs.
12. Repeat the patch application on all servers with installations for this product environment.
13. Restart applications.

Restarting ORPatch

If ORPatch is interrupted while applying a patch, or exits with an error, it saves a record of completed work in a restart state file in \$RETAIL_HOME/orpatch/logs. Investigate and resolve the problem that caused the failure, then restart ORPatch.

By default when ORPatch is started again, it will restart the patch process close to where it left off. If the patch process should **not** be restarted, add '-new' to the command-line of ORPatch.

Please note that starting a new patch session without completing the prior patch may have serious impacts that result in a patch not being applied correctly. For example, if a patch contains database updates and batch file changes and ORPatch is aborted during the load of database objects, abandoning the patch session will leave batch without the latest changes compiled in the installation.

Listing the Patch Inventory

After a patch is successfully applied by ORPatch the patch inventory in \$RETAIL_HOME/orpatch/inventory is updated with a record that the patch was applied. This inventory contains a record of the patches applied, the dates they were applied, the patch type and products impacted.

To list the patch inventory, perform the following steps:

1. Log in as the UNIX user that owns the product installation.

2. Set the RETAIL_HOME environment variable to the top-level directory of your product installation.
`export RETAIL_HOME=/u00/oretail/14.1/tst`
3. Set the PATH environment variable to include the orpatch/bin directory
`export PATH=$RETAIL_HOME/orphatch/bin:$PATH`
4. Execute orpatch to list the inventory.
`orphatch lsinventory`

Exporting Environment Metadata

ORPatch functionality is driven based on additional metadata that is stored in the environment to define what version of files are applied to the environment, and which database scripts have been applied to database schemas. This environment metadata is used to analyze the impact of patches to environments and controls what actions are taken during a patch. The metadata is stored in several locations depending on the type of information it tracks and in some cases it may be desirable to extract the metadata for analysis outside of ORPatch. For example, Oracle Support could ask for the metadata to be uploaded to assist them in triaging an application problem.

ORPatch provides a capability to export all of the metadata in an environment into a single directory and to automatically create a zip file of that content for upload or transfer to another system. The exact metadata collected from the environment depends on the products installed in the RETAIL_HOME.

ORPatch metadata exported:

Installed Product Component	Exported Metadata	Description
Any	orphatch/config/env_info.cfg orphatch/config/custom_hooks.cfg ORPatch inventory files	ORPatch configuration and settings
Any	All env_manifest.csv and deleted_env_manifest.csv files	Environment manifest files detailing product files installed, versions, customized flags and which patch provided the file
Database Schemas	DBMANIFEST table contents	Database manifest information detailing which database scripts were run, what version and when they were executed
Java Applications	All files from javaapp_<product>/config except jar files	Environment-specific product configuration files generated during installation
Java Applications	Combined export of all META-INF/env_manifest.csv files from all product ear files	Jar manifest information detailing files, versions, customized flags and which patch provided the file
Java Applications	orphatch/config/javaapp_<product>/ant.deploy.properties	Environment properties file created during product installation and used during application deployment
Java Applications	<weblogic_home>/server/lib/weblogic.policy	WebLogic server java security manager policy file

Installed Product Component	Exported Metadata	Description
Java Applications	<weblogic_home>/common/nodemanager/nodemanager.properties	Weblogic nodemanager configuration file
Java Applications	<domain_home>/config/fmwconfig/jps-config.xml	JPS configuration file for the Weblogic application domain.
RMS Batch	orpatch/config/rmsbatch_profile	Batch compilation shell profile
RMS Forms	orpatch/config/rmsforms_profile	Forms compilation shell profile
RWMS Forms	orpatch/cofngi/rwsmforms_profile	Forms compilation shell profile

Exports of environment metadata are always done to the \$RETAIL_HOME/support directory. When exporting metadata, you must specify the `-exname` argument and define the name that should be given to the export. The name is used for the directory within \$RETAIL_HOME/support and for the name of the zip file.

To extract an environment's metadata, perform the following steps:

1. Log in as the UNIX user that owns the product installation.
2. Set the RETAIL_HOME environment variable to the top-level directory of your product installation.

```
export RETAIL_HOME=/u00/oretail/14.1/tst
```
3. Set the PATH environment variable to include the orpatch/bin directory

```
export PATH=$RETAIL_HOME/orpatch/bin:$PATH
```
4. Execute orpatch to export the metadata.

```
orpatch exportmetadata -exname test_env
```

This example would export all metadata from the environment to the \$RETAIL_HOME/support/test_env directory. A zip file of the metadata would be created in \$RETAIL_HOME/support/test_env.zip.

Note: The \$RETAIL_HOME/support/<name> directory should be empty or not exist prior to running exportmetadata in order to ensure accurate results.

Comparing Environment Metadata

Once metadata has been exported from an environment, it can be used to compare the environment manifest metadata of two environments. ORPatch provides a capability to compare metadata of the current environment with the exported metadata of another environment. Note that even though there are many types of metadata exported by ORPatch, only environment manifest metadata is evaluated during comparisons. Metadata comparison happens in four phases: product comparison, patch comparison, ORPatch action comparison, and module-level comparison.

Product comparison compares the products installed in one environment with the products installed in another environment. Patch comparison compares the patches applied in one environment with the patches applied in another environment, for common products. This provides the most summarized view of how environments differ. Patches which only apply to products on one environment are not included in the comparison.

Since each patch may impact many files, the comparison then moves on to more detailed analysis. The third phase of comparison is to compare the enabled ORPatch actions

between environments. These actions roughly correspond to the installed 'components' of a product. For example, one environment may have database and forms components installed while another has only forms. Action comparison identifies components that are different between environments. The final phase of comparison is at the module level for actions that are common between environments. Modules which exist only on one environment, or exist on both environments with different revisions, or which are flagged as customized are reported during the comparison.

Differences between environment metadata are reported in a summarized fashion during the ORPatch execution. Details of the comparison results are saved in `$RETAIL_HOME/orpatch/logs/detail_logs/compare/details`. One CSV file is created for each phase of comparison: `product_details.csv`, `patch_details.csv`, `action_details.csv` and `module_details.csv`.

In order to be compared by ORPatch, exported metadata must be placed in the `$RETAIL_HOME/support` directory. The metadata should exist in the same structure that it was originally exported in. For example, if the metadata was exported to `$RETAIL_HOME/support/test_env` on another system, it should be placed in `$RETAIL_HOME/support/test_env` on this system.

When reporting differences between two environments, ORPatch uses names to refer to the environments. These names are defined as part of the `diffmetadata` command. The `-expname` parameter, which defines the directory containing the metadata, is also used as the name when referring to the exported metadata. The `-srcname` parameter defines the name to use when referring to the current environment. As an example, if you had exported the 'test' environment's metadata and copied it to the 'dev' environment's `$RETAIL_HOME/support/test_env` directory, you could run "`orpatch diffmetadata -expname test_env -srcname dev_env`". The detail and summary output would then refer to things that exist on dev but not test, revisions in the test environment versus revisions in the dev environment, etc.

ORPatch will automatically export the environment's current metadata to `$RETAIL_HOME/support/compare` prior to starting the metadata comparison.

To compare two environment's metadata, perform the following steps:

1. Export the metadata from another environment using `orpatch exportmetadata`.
2. Transfer the metadata zip from the other system to `$RETAIL_HOME/support`.
3. Log in as the UNIX user that owns the product installation.
4. Set the `RETAIL_HOME` environment variable to the top-level directory of your product installation.
`export RETAIL_HOME=/u00/oretail/14.1/dev`
5. Set the `PATH` environment variable to include the `orpatch/bin` directory
`export PATH=$RETAIL_HOME/orpatch/bin:$PATH`
6. Unzip the metadata zip file.
`unzip test_env.zip`
7. Execute `orpatch` to compare the metadata
`orpatch diffmetadata -expname test_env -srcname dev_env`

This example would compare the current environment against the metadata extracted in `$RETAIL_HOME/support/test_env` directory.

Note: The `$RETAIL_HOME/support/compare` directory will be automatically removed before environment metadata is exported at the start of the comparison.

Reverting a Patch

In general it is best to either completely apply a patch, or restore the entire environment from the backup taken before starting the patch. It is important to test patches in test or staging environments before applying to production. In the event of problems, Oracle Retail recommends restoring the environment from backup if a patch is not successful.

Note: Reverting patches in an integrated environment can be extremely complex and there is no fully automated way to revert all changes made by a patch. Restoring the environment from a backup is the recommended method to remove patches.

It is, however, possible to revert small patches using the backups taken by ORPatch during a patch. This will restore only the files modified, and it is still necessary to restore the database if any changes were made to it.

Note: Reverting a patch reverts only the files modified by the patch, and does not modify the database, or recompile forms or batch files after the change.

When multiple patches have been applied to an environment, reverting any patches other than the most recently applied patch is strongly discouraged as this will lead to incompatible or inconsistent versions of modules applied to the environment. If multiple patches are going to be applied sequentially it is recommended to first merge the patches into a single patch that can be applied or reverted in a single operation.

To revert a patch, perform the following steps:

1. Log in as the UNIX user that owns the product installation.
2. Set the RETAIL_HOME environment variable to the top-level directory of your product installation.
`export RETAIL_HOME=/u00/oretail/14.1/tst`
3. Set the PATH environment variable to include the orpatch/bin directory
`export PATH=$RETAIL_HOME/orpatch/bin:$PATH`
4. Identify the backup directory in \$RETAIL_HOME/backups that contains the backup from the patch you want to restore.
 - The backup directory will contain a patch_info.cfg file which contains the name of the patch the backup is from.
 - It is possible to have two directories for the same patch, if ORPatch was updated during the patch. It is not possible to revert the updates to ORPatch. Select the backup directory that does not contain orpatch files.
 - If it is not clear which backup directory to use, restore the environment from backup
5. Execute orpatch to revert the environment using the contents of the backup directory
`orphatch revert -s $RETAIL_HOME/backups/backup-11232013-152059`
6. Restore the database from backup if the patch made database changes
7. Use the orcompile script to recompile forms if the patch included RMS or RWMS forms files
`orcompile -a RMS -t FORMS`
`orcompile -a RWMS -t FORMS`
8. Use the orcompile script to recompile batch if the patch included RMS batch files
`orcompile -a RMS -t BATCH`

9. Use the ordeploy script to redeploy the appropriate Java applications if the patch included Java files

```

ordeloy -a RPM -t JAVA
ordeloy -a REIM -t JAVA
ordeloy -a ALLOC -t JAVA
ordeloy -a RESA -t JAVA

```

Merging Patches

When patches are applied individually some ORPatch tasks such as compiling forms and batch files or deploying Java archives are performed separately for each patch. This can be time-consuming. An alternative is to use the ORMerge utility to combine several patches into a single patch, reducing application downtime by eliminating tasks that would otherwise be performed multiple times. Patches merged with ORMerge are applied with ORPatch after the merge patch is created.


Source and Destination Directories

ORMerge uses source and destination areas in order to merge patch files. The source area is a single directory that contains the extracted patches to merge. The destination area is the location where the merged patch will be created. If a file exists in one or more source patches, only the highest revision will be copied to the merged patch.

The source and destination directories should exist under the same parent directory. That is, both the source and destination directories should be subdirectories of a single top-level directory.

The source directory must have all patches to be merged as immediate child directories. For example if three patches need to be merged the directory structure would look like this:

Source and Destination Directory Example

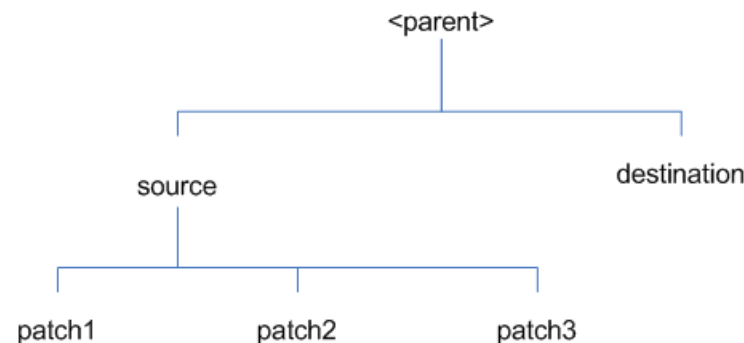

In the example above, the manifest.csv and patch_info.cfg files for each patch to be merged must exist in source/patch1, source/patch2, and source/patch3.

ORMerge Command-line Arguments

Argument	Required	Description
-s	Yes	Path to source directory containing patches to merge
-d	Yes	Path to destination directory that will contain merged patch

Argument	Required	Description
-name	No	The name to give the merged patch. If not specified, a name will be generated. When the merged patch is applied to a system, this name will appear in the Oracle Retail patch inventory.
-inplace	No	Used only when applying a patch to installation files prior to the first installation. See "Patching prior to the first install" in the Troubleshooting section later, for more information.

Running the ORMerge Utility

To merge patches, perform the following steps:

1. Log in as the UNIX user that owns the product installation.
2. Set the RETAIL_HOME environment variable to the top-level directory of your product installation.

```
export RETAIL_HOME=/u00/oretail/14.1/tst
```
3. Set the PATH environment variable to include the orpatch/bin directory

```
export PATH=$RETAIL_HOME/orphatch/bin:$PATH
```
4. Create a staging directory to contain the patches.

```
mkdir -p $RETAIL_HOME/stage/merge/src
```
5. Download the patches to the staging directory and unzip them so that each patch is in a separate subdirectory.
6. Review the README.txt included with each patch to identify additional manual steps that may be required. If manual steps are specified in any patch, execute them at the appropriate time when applying the merged patch.
7. Create a destination directory to contain the merged patches.

```
mkdir -p $RETAIL_HOME/stage/merge/dest
```
8. Execute ORMerge to merge the patches.

```
ormerge -s $RETAIL_HOME/stage/merge/src -d $RETAIL_HOME/stage/merge/dest -name merged_patch
```

The merged patch can now be applied as a single patch to the product installation using ORPatch.

Compiling Application Components

In some cases it may be desirable to recompile RMS Forms, RWMS Forms or RMS Batch outside of a product patch. The ORCompile utility is designed to make this easy and remove the need to manually execute 'make' or 'frmcmp' commands which can be error-prone. ORCompile leverages ORPatch functions to ensure that it compiles forms and batch exactly the same way as ORPatch. In addition ORCompile offers an option to compile invalid database objects using ORPatch logic.

ORCompile takes two required command line arguments each of which take an option. Arguments and options can be specified in upper or lower case.

ORCompile Command Line Arguments

Argument	Description
-a <app>	The application to compile.

-t <type>	The type of application objects to compile
-----------	--

ORCompile Argument Options

Application	Type	Description
RMS	BATCH	Compile RMS Batch programs
RMS	FORMS	Compile RMS Forms
RWMS	FORMS	Compile RWMS Forms
RMS	DB	Compile invalid database objects in the primary RMS schema
RMS	DB-ASYNC	Compile invalid database objects in the RMS_ASYNC_USER schema
ALLOC	DB-ALC	Compile invalid database objects in the Allocations user schema
ALLOC	DB-RMS	Compile invalid database objects in the RMS schema
REIM	DB	Compile invalid database objects in the RMS schema
RME	DB	Compile invalid database objects in the RME schema
ASO	DB	Compile invalid database objects in the ASO schema
RA	DB-DM	Compile invalid database objects in the RA DM schema
RA	DB-RABATCH	Compile invalid database objects in the RA batch schema
RA	DB-RMSBATCH	Compile invalid database objects in the RA RMS batch schema
RA	DB-FEDM	Compile invalid database objects in the RA front-end schema

Note: Compiling RMS type DB, ReIM type DB, and Allocation type DB-RMS, are all identical as they attempt to compile all invalid objects residing in the RMS schema.

Running the ORCompile utility

To compile files, perform the following steps:

1. Log in as the UNIX user that owns the product installation.
2. Set the RETAIL_HOME environment variable to the top-level directory of your product installation.

```
export RETAIL_HOME=/u00/oretail/14.1/tst
```
3. Set the PATH environment variable to include the orpatch/bin directory

```
export PATH=$RETAIL_HOME/orphatch/bin:$PATH
```
4. Execute orcompile to compile the desired type of files.

```
orcompile -a <app> -t <type>
```

ORCompile Examples

Compile RMS Batch.

```
orcompile -a RMS -t BATCH
```

Compile RWMS Forms.

```
orcompile -a RWMS -t FORMS
```

Compile invalid objects in the RA DM schema.

```
orcompile -a RA -t DB-DM
```

Compile invalid objects in the RMS owning schema.

```
orcompile -a RMS -t DB
```

Deploying Application Components

In some cases it may be desirable to redeploy Java applications outside of a product patch. For example, when troubleshooting a problem, or verifying the operation of the application with different WebLogic settings. Another situation might include wanting to deploy the application using the same settings, but without customizations to isolate behavior that could be related to customized functionality.

The ordeploy utility is designed to make this easy and remove the need to re-execute the entire product installer when no configuration needs to change. ORDeploy leverages Oracle Retail Patch Assistant functions to ensure that it deploys applications exactly the same way as ORPatch. In addition ORDeploy offers an option to include or not include custom Java files, to ease troubleshooting.

ORDeploy takes two required command line arguments each of which take an option. Arguments and options can be specified in upper or lower case.

ORDeploy Command Line Arguments

Argument	Description
-a <app>	The application to deploy.
-t <type>	The type of application objects to deploy

ORDeploy Argument Options

Application	Type	Description
ALLOC	JAVA	Deploy the Allocations Java application and Java batch files, including any custom Java files.
ALLOC	JAVANOCUSTOM	Deploy the Allocations Java application and Java batch files, NOT including any custom Java files.
REIM	JAVA	Deploy the REIM Java application and Java batch files, including any custom Java files.
REIM	JAVANOCUSTOM	Deploy the REIM Java application and Java batch files, NOT including any custom Java files.
RESA	JAVA	Deploy the RESA Java application, including any custom Java files.
RESA	JAVANOCUSTOM	Deploy the RESA Java application, NOT including any custom Java files.
RPM	JAVA	Deploy the RPM Java application and Java batch files, including any custom Java files.
RPM	JAVANOCUSTOM	Deploy the RPM Java application and Java batch files, NOT including any custom Java files.

Running the ORDeploy utility

To deploy Java applications, perform the following steps:

1. Log in as the UNIX user that owns the product installation.
2. Set the RETAIL_HOME environment variable to the top-level directory of your product installation.
`export RETAIL_HOME=/u00/oretail/14.1/tst`
3. Set the PATH environment variable to include the orpatch/bin directory
`export PATH=$RETAIL_HOME/orphatch/bin:$PATH`
4. Execute ORDeploy to deploy the desired Java application.
`ordeploy -a <app> -t <type>`

ORDeploy Examples

Deploy RPM.

```
ordeploy -a RPM -t JAVA
```

Deploy ReIM without including Java customizations.

```
ordeploy -a REIM -t JAVANOCUSTOM
```

Maintenance Considerations

The additional information stored within the RETAIL_HOME and within database schemas adds some considerations when performing maintenance on your environment.

Database Password Changes

Oracle wallets are used to protect the password credentials for connecting to database schemas. This includes all database schemas used during an install. If the password for any of these users is changed the wallet's entry must be updated.

The wallet location is configurable but by default is in the following locations:

Location	Installation Type
\$RETAIL_HOME/orphatch/rms_wallet	RMS Database RMS Batch
\$RETAIL_HOME/orphatch/rms_wallet_app	RMS Forms
\$RETAIL_HOME/orphatch/rwms_wallet	RWMS Database
\$RETAIL_HOME/orphatch/rwms_wallet_app	RWMS Forms
\$RETAIL_HOME/orphatch/oraso_wallet	ASO Database
\$RETAIL_HOME/orphatch/orme_wallet	RME Database
\$RETAIL_HOME/orphatch/ra_wallet	RA Database

The wallet alias for each schema will be <username>_<dbname>. Standard mkstore commands can be used to update the password.

For example:

```
mkstore -wrl $RETAIL_HOME/orphatch/rms_wallet -modifyCredential rms_rmsdb rms01
rmspassword
```

This command will update the password for the RMS01 user to 'rmspassword' in the alias 'rms_rmsdb'.

The Oracle wallets are required to be present when executing ORPatch. Removing them will prevent you from being able to run ORPatch successfully. In addition the Oracle wallet location is referenced in the RMS batch.profile, and in the default RMS and RWMS Forms URL configuration, so removing them will require reconfiguration of batch and forms. If batch and forms were reconfigured after installation to use other wallet files, it is possible to backup and remove the wallets, then restore them when running ORPatch.

WebLogic Password Changes

Java wallets are used to protect the password credentials used when deploying Java products. This includes the WebLogic administrator credentials, LDAP connection credentials, batch user credentials and any other credentials used during an install. If the password for any of these users is changed the wallet's entry must be updated, or the Java product installation can be run again.

The wallet location is in the following locations:

Location	Installation Type
\$RETAIL_HOME/orpatch/config/javapp_rpm	RPM Java
\$RETAIL_HOME/orpatch/config/javapp_reim	ReIM Java
\$RETAIL_HOME/orpatch/config/javapp_alloc	Allocation Java
\$RETAIL_HOME/orpatch/config/javapp_resa	RESA Java
\$RETAIL_HOME/orpatch/config/javaapp_rasrm	RASRM Java

The wallet aliases will be stored in the retail_installer partition. The names of the aliases will vary depending on what was entered during initial product installation.

The dump_credentials.sh script can be used to list the aliases in the wallet.

For example:

```
cd $RETAIL_HOME/orpatch/deploy/retail-public-security-api/bin
./dump_credentials.sh $RETAIL_HOME/orpatch/config/javapp_alloc
```

```
Apapplication level key partition name:retail_installer
User Name Alias:dsallocAlias User Name:rms01app
User Name Alias:BATCH-ALIAS User Name:SYSTEM_ADMINISTRATOR
User Name Alias:wlsAlias User Name:weblogic
```

The easiest way to update the credential information is to re-run the Java product installer. If you need to manually update the password for a credential, the save_credential.sh script can be used.

For example:

```
cd $RETAIL_HOME/orpatch/deploy/retail-public-security-api/bin
./save_credential.sh -l $RETAIL_HOME/orpatch/config/javapp_alloc -p
retail_installer -a wlsAlias -u weblogic
```

This command will prompt for the new password twice and update the alias wlsAlias, username weblogic with the new password.

Infrastructure Directory Changes

The RETAIL_HOME/orpatch/config/env_info.cfg file contains the path to the database ORACLE_HOME on database or RMS Batch installations, to the WebLogic Forms and Reports ORACLE_HOME and ORACLE_INSTANCE on RMS or RWMS Forms installations, and to the WEBLOGIC_DOMAIN_HOME, WL_HOME and MW_HOME on Java product installations. If these paths change, the related configuration variables in the env_info.cfg file must be updated.

DBManifest Table

The table dbmanifest within Oracle Retail database schemas is used to track the database scripts which have been applied to the schema. It is critical not to drop or truncate this table. Without it, ORPatch will attempt to re-run scripts against the database which have already been applied which can destroy a working environment. Similarly, if copying a schema from one database to another database, ensure that the dbmanifest table is preserved during the copy.

RETAIL_HOME relationship to Database and Application Server

The RETAIL_HOME associated with an Oracle Retail product installation is critical due to the additional metadata and historical information contained within it. If a database or application installation is moved or copied, the RETAIL_HOME related to it should be copied or moved at the same time.

Jar Signing Configuration Maintenance

The RPM product installation includes an option to configure a code signing certificate so that jar files modified during installation or patching are automatically re-signed. This configuration is optional, but recommended. If it is configured, the code signing keystore is copied during installation to \$RETAIL_HOME/orpatch/config/jarsign/orpkeystore.jks. The keystore password and private key password are stored in a Java wallet in the \$RETAIL_HOME/orpatch/config/jarsign directory. The credentials are stored in a wallet partition called orpatch:

Alias	Username	Description
storepass	discard	Password for the keystore
keypass	discard	Password for the private key

The keystore file and passwords can be updated using the product installer. This is the recommended way to update the signing configuration.

If only the credentials need to be updated, the sign_jar.sh script can be used.

5. Log in as the UNIX user that owns the product installation.
6. Set the RETAIL_HOME environment variable to the top-level directory of your installation.
export RETAIL_HOME=/u00/oretail/14.1/tst
7. Change directories to the location of sign_jar.sh
cd \$RETAIL_HOME/orpatch/deploy/bin
8. Execute sign_jar.sh
sign_jar.sh changepwd

9. When prompted, enter the new keystore password
10. When prompted, enter the new private key password

Customization

Patching Considerations with Customized Files and Objects

In general, the additional capabilities provided by the ORPatch should make it easier to evaluate the potential impacts of patches to your customizations of Oracle Retail products. However, the additional metadata maintained by the Oracle Retail patching utilities does add some considerations when making customizations.

General Guidelines

It is always preferred to customize applications by extension rather than by direct modification. For example, adding new database objects and forms rather than modifying existing Oracle Retail objects and forms. You can also leverage built-in extension points such as User Defined Attributes, the Custom Flexible Attribute Solution, or seeded customization points in ADF Applications.

It is strongly discouraged to directly modify Oracle Retail database objects, especially tables, as your changes may be lost during patching or may conflict with future updates. When adding or modifying database objects, Oracle Retail recommends that all objects be added with scripts to ensure that they can be rebuilt if necessary after a patch.

Custom Database Objects

When you create new database objects, Oracle Retail recommends placing them in an Oracle database schema specifically for your customizations. You must use synonyms and grants to allow the Oracle Retail product schema owner and other users to access your objects, and use synonyms and grants to allow your customizations to access Oracle Retail objects. A separate schema will ensure that your customizations are segregated from base Oracle Retail code.

ORPatch expects that there will be no invalid objects in the database schemas it manages after a patch is applied. For this reason adding extra objects to the product schema could result in failures to apply patches as changes to base objects may cause custom objects to go invalid until they are updated. In this situation, manually update the custom objects so that they compile, and restart the patch.

Custom Forms

When creating new custom forms, Oracle Retail recommends placing them in a separate directory specifically for your customizations. This directory should be added to the FORMS_PATH of your RMS or RWMS Forms URL configuration to allow the forms to be found by the Forms Server. This will ensure that your customizations are segregated from base Oracle Retail code. If you choose to place customizations in the Forms bin directory, then your custom forms will need to be recopied each time Forms are fully recompiled.

ADF Application Customization

Oracle Retail ADF-based applications such as Allocation and ReSA can be customized using a process called 'seeded customization'. The customization process involves using JDeveloper in Customizer mode to create changes to product configurations, and then building a MAR archive containing the changes. The generated MAR is deployed to the MDS repository used by the application and applied to the application at runtime. These types of customizations are handled outside of ORPatch and are not reported during patch analysis or tracked by the custom file registration utility. More information can be found in the respective product customization guides.

Custom Compiled Java Code

When customizing Oracle Retail Java-based products such as RPM and ReIM via product source code, ORPatch supports automatically adding compiled customizations into the application ear file prior to deployment. This allows customizations to be applied to the application without directly modifying the base product ear, enabling customizations and defect hotfixes to co-exist when they do not change the same file or a dependent file. See the later “Custom Compiled Java Code” section for additional information and considerations.

Analyze Patches when Customizations are Present

Whenever you have customized a product by directly modifying Oracle Retail files or database objects, it is important to ensure you analyze each the files that will be updated by a patch before applying the patch. This will allow you to identify any customized files which may be overwritten by the patch and either merge your customization with the new version of the file, or re-apply the customization after applying the patch.

Manifest Updates

If you choose to customize Oracle Retail files directly, it is extremely important **not** to update the revision number contained in the env_manifest.csv. This could cause future updates to the file to be skipped, invalidating later patch applications as only a partial patch would be applied. The customized revision number for modified files will need to be tracked separately.

Registering Customized Files

The ORPatch contains utilities and functionality to allow tracking of files that have been customized through direct modification. This process is referred to as ‘registering’ a customized file. Registration only works for files which are shipped by Oracle Retail. It is not possible to register new files created in the environment as part of extensions or customizations.

When patches are analyzed with ORPatch, special reporting is provided if any registered files would be updated or deleted by the patch. Customized files impacted by the patch are listed at the end of the analysis report from ORPatch. The detail files generated during the analyze will contain a column called ‘customized’ which will have a Y for any files which were registered as customized. This allows easier identification of customizations which will be overwritten by a patch.

All files delivered by Oracle Retail are considered ‘base’ and so when they are applied to an environment any registrations of those files as customized will revert back to un-customized. **Each time a patch overwrites customized files, you must re-register the files as customized once you have applied customizations.**

To register customized files, use the \$RETAIL_HOME/orpatch/bin/orcustomreg script.

The orcustomreg script operates in one of two modes: registration and list.

- Registration mode registers or unregisters one or more files as customized.
- List mode lists all files in the environment that are registered as customized.

Command Line Arguments for Registration Mode

Argument	Description
-f <file>	Adds <file> to the list of files that will be registered. Can be specified more than once.

Argument	Description
-bulk <file>	Specifies a file to read, containing one filename per line. All filenames listed inside <file> will be registered.
-register	Files specified with -f or -bulk will be registered as 'customized'
-unregister	Files specified with -f or -bulk will be registered as 'base'

Notes:

- At least one of -f or -bulk is required.
- If neither -register nor -unregister is specified, the default is '-register'.
- File names specified with -f must either be fully-qualified or be relative to RETAIL_HOME. The same is true for filenames specified within a -bulk file.

Command Line arguments for list mode

Argument	Description
-list	List all files in the environment registered as customized

Running the orcustomreg Script

Perform the following procedure to run the orcustomreg script:

1. Log in as the UNIX user that owns the product installation.
2. Set the RETAIL_HOME environment variable to the top-level directory of your product installation.
export RETAIL_HOME=/u00/oretail/14.1/tst
3. Set the PATH environment variable to include the orpatch/bin directory
export PATH=\$RETAIL_HOME/orphatch/bin:\$PATH
4. Execute orcustomreg script to register the desired file(s).
orcustomreg -register -f <file>

Examples of using the orcustomreg Script

Register \$RETAIL_HOME/dbsql_rms/Cross_Pillar/control_scripts/source/oga.sql as customized.

```
orcustomreg -f dbsql_rms/Cross_Pillar/control_scripts/source/oga.sql
```

Unregister customizations for

```
$RETAIL_HOME/dbsql_rwms/Triggers/Source/TR_WAVE.trg
```

```
orcustomreg -unregister -f $RETAIL_HOME/dbsql_rwms/Triggers/Source/TR_WAVE.trg
```

Bulk register several files as customized.

```
echo "$RETAIL_HOME/oracle/proc/src/mrt.pc" > custom.txt
echo "$RETAIL_HOME/oracle/proc/src/saldly.pc" >> custom.txt
echo "$RETAIL_HOME/oracle/proc/src/ccprg.pc" >> custom.txt
orcustomreg -bulk custom.txt
```

List all files registered as customized.
 orcustomreg -list

Custom Compiled Java Code

When customizing Oracle Retail Java-based products such as RPM and ReIM via product source code, ORPatch supports automatically adding compiled customizations into the application ear file prior to deployment. This allows customizations to be applied to the application without directly modifying the base product ear, enabling customizations and defect hotfixes to co-exist when they do not change the same file or a dependent file.

This functionality is enabled by creating a directory called \$RETAIL_HOME/javaapp_<app>/custom, where <app> is the application the customizations apply to. Files stored within this directory will be combined with the base product ear files before the application is deployed to WebLogic. ORPatch will attempt to consider customizations stored within the 'custom' directory during patch analysis by triggering more detailed ear file change analysis to assist with identifying which customizations might be impacted by changes in the patches.

Note: It is not possible, nor necessary, to register compiled Java customizations with the orcustomreg tool.

As with other customization techniques for other technologies, Oracle Retail recommends making Java customizations in new files as much as possible, versus overwriting base product or configuration files. In the past it was necessary to build complete replacement product ear files, but this method of customization is no longer required nor recommended. Replacement ear and jar files will not contain the META-INF/env_manifest.csv files which are required in order to be able to apply incremental patches. Instead, compile the specific Java classes being customized and place them along with any custom configuration files in \$RETAIL_HOME/javaapp_<app>/custom.

Building Deployable ear files

When constructing the product ear file to deploy to WebLogic, ORPatch applies changes to the ear file in a specific order, with files from later steps overwriting files in earlier steps. The resulting ear is stored in \$RETAIL_HOME/javaapp_<app>/deploy, and then deployed to WebLogic.

Sequence for ORPatch Java Product ear file updates

Order	File Type	Location
1	Base product ear	\$RETAIL_HOME/javaapp_<app>/base
2	Updated configuration files	\$RETAIL_HOME/javaapp_<app>/config
3	Oracle Retail-supplied hotfixes	\$RETAIL_HOME/javaapp_<app>/internal
4	Compiled customizations	\$RETAIL_HOME/javaapp_<app>/custom

Merging Custom Files

When merging files from the custom directory with the product ear, ORPatch uses the directory path of the files within custom to calculate where the file should be stored within the ear. This allows arbitrary nesting of files, even when placing files within jars stored in jars, stored within the ear. The following examples below use RPM, but apply to adding compiled customizations to any Java-based product.

Custom directory location and product ear location Examples

File path within javaapp_<app>/custom/	Final Ear File Location
rpm14.ear/company/ui/MyCustom.class	In rpm14.ear: /company/ui/MyCustom.class
rpm14.ear/rpm14.jar/company/bc/MyCustom2.class	In rpm14.ear: In rpm14.jar: /company/bc/MyCustom2.class
rpm14.ear/lib/ourcustomlibs.jar	In rpm14.ear /lib/ourcustomlibs.jar
rpm14.ear/WebLaunchServlet.war/lib/ rpm14.jar/company/bc/MyCustom2.class	In rpm14.ear: In WebLaunchServlet.war: In lib/rpm14.jar: /company/bc/MyCustom2.class

Analyzing patches when customizations are present

When analyzing a patch which contains a base product ear and the custom directory contains files, ORPatch will automatically trigger a more detailed analysis of the changes coming in a patch. This includes calculating what files inside the product ear have been added, removed or updated and which files appear to be customized based on the contents of the 'custom' directory. The detailed results of the ear file comparison during patch analysis will be saved in javaapp_<app>_archive_compare_details.csv. Any custom files which appeared to be impacted by the patch are saved in javapp_<app>_archive_custom_impacts.csv. Both files will be in the \$RETAIL_HOME/orpatch/logs/detail_logs/analyze/details directory.

Note: This detailed analysis is not available when analyzing individual hotfixes, so special care must be taken when applying hotfixes to a customized product installation, to ensure there are no conflicts between customizations and hotfix changes.

Customizations and cumulative patches

By default, when applying a cumulative patch, ORPatch will not include customizations in the deployed product ear, even if they are present in the appropriate directory. This allows verification that the application is functioning properly using base code, before applying customizations. After verifying the initial deployment, use ORDeploy with the "-t JAVA" option to construct and deploy the product ear including customizations.

If customizations need to be removed outside of a patch, use ORDeploy with the "-t JAVANOCUSTOM" option to create and deploy an ear containing only Oracle Retail code. To force ORPatch to include customizations in the deployed ear even when applying a cumulative patch, set JAVAAPP_<app>_INCLUDE_CUSTOM=Y in the \$RETAIL_HOME/orpatch/config/env_info.cfg file.

Changing configuration files

It is possible to directly change product configuration files in \$RETAIL_HOME/javaapp_<app>/config. These updates can be deployed to the environment using the ORDeploy utility. However, the 'config' directory is completely

recreated each time the product installer is used. This means that modifications will be lost and must be manually reapplied after each installer run. It is recommended to make configuration changes via the installer where possible, and retain the `ant.install.properties` file for use in later installer sessions.

Extending Oracle Retail Patch Assistant with Custom Hooks

The default ORPatch actions and processing logic is sufficient to install and patch the base Oracle Retail product code. However there may be situations where custom processing is desired during patching activities such as executing a shell script prior to the start of patching, or running a SQL script at the end of the patch.

ORPatch supports extensions in the form of custom hooks. These hooks allow external scripts to be run at specific points during ORPatch processing.

ORPatch Processing

Action

ORPatch supports a variety of 'actions' which define the steps necessary to apply updates to a particular area of the Oracle Retail application. Each action is generally specific to updates to a single technology or logical component of the environment. For example, one action might handle making updates to the RMS database schema, while a separate action is responsible for compiling RWMS forms, and a different action deploys the RPM Java application. These actions are enabled and disabled within the environment configuration file, allowing ORPatch to determine what types of changes to apply to each product installation.

ORPatch Actions

Order	Action Name	Description
1	DBSQL_RMS	Loads RMS and RPM database objects into the primary RMS schema
2	DBSQL_RMSASYNC	Loads database objects into the RMS_ASYNC_USER schema
3	DBSQL_REIM	Loads ReIM database objects into the RMS schema
4	DBSQL_RAF	Loads Retail Application Framework database objects into the RMS schema
5	DBSQL_ALCRMS	Loads Allocation database objects into the RMS schema
6	DBSQL_ALLOC	Loads Allocation database objects into the Allocation user schema
7	DBSQL_RMSDEMO	Used to create demo data in the RMS schema if demo data was selected during initial installation
8	DBSQL_RMSDAS	Loads database objects into the RMS Data Access Schema
9	RMSBATCH	Compiles RMS Batch
10	ORAFORMS_RMS	Compiles RMS Forms, copies RMS reports to \$RETAIL_HOME
11	RMSRETLSCRIPTS	Copies Oracle Retail Extract and Load scripts for RMS
12	RMSDCSCRIPTS	Copies Oracle Retail Merchandising System data conversion scripts
13	DBSQL_RWMS	Loads database objects into the primary RWMS schema

Order	Action Name	Description
14	DBSQL_RWMSADF	Loads database objects into the RWMS ADF user schema
15	DBSQL_RWMSUSER	Loads database objects into the RWMS user schema
16	ORAFORMS_RWMS	Compiles RWMS Forms, copies RWMS batch scripts and reports to \$RETAIL_HOME
17	JAVAAPP_RPM	Deploys the RPM Java application and batch scripts
18	JAVAAPP_REIM	Deploys the REIM Java application and batch scripts
19	JAVAAPP_ALLOC	Deploys the Allocation Java application and batch scripts
20	JAVAAPP_RESA	Deploys the ReSA Java application
21	JAVAAPP_RASRM	Deploys the RASRM Java application
22	DBSQL_RARMSBATCH	Loads database objects into the RMS Batch schema for RA
23	DBSQL_RADM	Loads database objects into the RA Data Mart schema
24	DBSQL_RAFEDM	Loads database objects into the RA Front-end schema
25	DBSQL_RABATCH	Loads database objects into the RA Batch schema
26	DBSQL_RASECORE	Loads core database objects into the ORASE schema
27	DBSQL_RASEASO	Loads ASO database objects into the ORASE schema
28	DBSQL_RASECDT	Loads CDT database objects into the ORASE schema
29	DBSQL_RASECIS	Loads CIS database objects into the ORASE schema
30	DBSQL_RASEDT	Loads DT database objects into the ORASE schema
31	DBSQL_RASEMBA	Loads MBA database objects into the ORASE schema
32	RASECOREBATCH	Copies ORASE core batch scripts and libraries
33	RASEASOBATCH	Copies ORASE ASO batch scripts and libraries
34	RASECDTBATCH	Copies ORASE CDT batch scripts and libraries
35	RASECISBATCH	Copies ORASE CIS batch scripts and libraries
36	RASEDTBATCH	Copies ORASE DT batch scripts and libraries
37	RASEMBABATCH	Copies ORASE MBA batch scripts and libraries

Phase

ORPatch processes patches in phases. Each action relevant to a patch and host is provided an opportunity to process the patch for each phase. The standard phases which allow hooks are:

Restart Phase Number	Phase Name	Description
N/A	PRECHECK	Actions verify that their configuration appears complete and correct. This phase and the associated hooks will be run every time orpatch is executed, even if processing will be restarted in a later phase.

Restart Phase Number	Phase Name	Description
10	PREACTION	Actions do processing prior to when files are copied to the environment. Files are deleted during this phase.
20	COPYPATCH	Actions copy files included in a patch into the destination environment and the environment manifest is updated.
30	PATCHACTION	Actions take the more detailed steps necessary to apply the new files to the environment. For database actions in particular, this is the phase when new and updated sql files are loaded into the database.
40	POSTACTION	Actions do processing after files have been copied and PatchActions are completed. The Forms actions, for example, use this phase to compile the forms files as this must happen after database packages are loaded.
50	CLEANUP	Actions do any additional processing. Currently no actions implement activities in this phase.

Configuring Custom Hooks

Custom hooks are configured in a configuration file `RETAIL_HOME/orpatch/config/custom_hooks.cfg`. The configuration file is a simple text file where blank lines and lines starting with `#` are ignored and all other lines should define a custom hook.

To define a custom hook, a line is added to the file in the form:

```
<hook name>=<fully qualified script>
```

The hook name must be in upper case and is in the form:

```
<action name>_<phase name>_<sequence>
```

The action name is any action name understood by ORPatch. The phase name is one of the five phase names from the table above. The sequence is either 'START' or 'END'. Hooks defined with a sequence of 'START' are run before the action's phase is invoked. Hooks defined with a sequence of 'END' are run after the action's phase is invoked.

Multiple scripts can be associated with a single hook by separating the script names with a comma. If a hook name appears in the configuration file multiple times only the last entry will be used.

The script defined as a custom hook must be an executable shell script that does not take any arguments or inputs. The only environment variable that is guaranteed to be passed to the custom hook is `RETAIL_HOME`. The script must return 0 on success and non-zero on failure.

If an action is a DBSQL action (i.e. has a name like `DBSQL_`), the custom hook can optionally be a .sql file. In this case the SQL script will be run against the database schema that the DBSQL action normally executes against. The SQL script must not generate any ORA- or SP2- errors on success. In order to be treated as a database script, the extension of the file defined as the custom hook must be .sql in lower-case. Any other extension will be treated as if it is a shell script. If you have database scripts with different extensions, they must be renamed or wrapped in a .sql script.

When using the PRECHECK phase and START sequence, please note that the custom hook will be executed prior to any verification of the configuration. Invalid configuration, such as invalid database username/password or a non-existent `ORACLE_HOME`, may cause the custom hook to fail depending on the actions it tries to

take. However in these cases, the normal orpatch PRECHECK activities would likely have failed as well. All that is lost is the additional context that orpatch would have provided about what was incorrect about the configuration.

Restarting with Custom Hooks

If a custom hook fails, for example a shell script hook returns non-zero or a sql script generates an ORA- error in its output, the custom hook will be treated as failing. A failing custom hook causes ORPatch to immediately stop the patching session.

When ORPatch is restarted it always restarts with the same phase and action, including any START sequence custom hooks. If the START sequence custom hook fails, the action's phase is never executed. With an END sequence custom hook, the action's phase is re-executed when ORPatch is restarted and then the custom hook is re-executed.

When an action's phase is costly, for example the DBSQL_RMS action which does a lot of work, this can mean a lot of duplicate processing.

For this reason it is preferred to use START sequence custom hooks whenever possible. If necessary, use a START sequence hook on a later phase or a later action, rather than an END sequence custom hook.

Patch-level Custom Hooks

In addition to action-specific hooks, there are two patch-level hook points available. These hooks allow scripts to be run before any patching activities start and after all patching activities are completed. The hooks are defined in the same configuration file, with a special hook name.

To run a script before patching, define:

```
ORPATCH_PATCH_START=<fully qualified script>
```

To run a script after patching, define:

```
ORPATCH_PATCH_END=<fully qualified script>
```

These hooks only support executing shell scripts, database scripts must be wrapped in a shell script. It is also important to note that these hooks are run on every execution of ORPatch to apply a patch, even when restarting a patch application. If the START sequence patch-level hook returns a failure, patching is aborted. If the END sequence patch-level hook returns a failure, it is logged but ignored as all patching activities have already completed.

Please note that the ORPATCH_PATCH_START hook is executed prior to any verification of the configuration. Invalid configuration may cause the custom hook to fail depending on the actions it tries to take. However in these cases, the normal ORPatchactivities would likely fail as well.

Example Custom Hook Definitions

A shell script that is executed prior to the Pre-Action phase of RMS Batch:

```
RMSBATCH_PREACTION_START=/u00/oretail/prepare_custom_header.sh
```

A shell script that is executed after RETL script files are copied into the RETAIL_HOME:

```
RETLSCRIPTS_COPYPATCH_END=/u00/oretail/copy_custom_files.sh
```

A SQL script that is executed against the RWMS owning schema at the start of the Clean-up Phase:

```
DBSQL_RWMS_CLEANUP_START=/dba/sql/recompile_synonyms.sql
```

Troubleshooting Patching

There is not a general method for determining the cause of a patching failure. It is important to ensure that patches are thoroughly tested in a test or staging system several times prior to attempting to apply the patch to a production system, particularly if the patch is a large cumulative patch. After the test application is successful, apply the patch to the production system.

ORPatch Log Files

ORPatch records extensive information about the activities during a patch to the log files in `RETAIL_HOME/orpatch/logs`. This includes a summary of the actions that are planned for a patch, information about all files that were updated by the patch, and detailed information about subsequent processing of those files. The ORPatch log files also contain timestamps to assist in correlating log entries with other logs.

Even more detailed logs are available in `RETAIL_HOME/orpatch/logs/detail_logs` for some activities such as forms compilation, invalid database object errors, and output from custom hooks. If the standard ORPatch log information is not sufficient, it might be helpful to check the detailed log if it exists.

Restarting ORPatch

The restart mechanism in ORPatch is designed to be safe in nearly any situation. In some cases to ensure this, a portion of work may be redone. If the failure was caused by an intermittent issue that has been resolved, restarting ORPatch may be sufficient to allow the patch to proceed.

Manual DBManifest Updates

A possible cause for database change script failures is that a database change was already made manually to the database. In this event, you may need to update the dbmanifest table to record that a specific script does not need to be run. Before doing this, it is extremely important to ensure that all statements contained in the script have been completed.

Use the `$RETAIL_HOME/orpatch/bin/ordbmreg` script to register database scripts in the dbmanifest table.

Command Line Arguments for ordbmreg

Argument	Description
-f <file>	Adds <file> to the list of files that will be registered. Can be specified more than once.
-bulk <file>	Specifies a file to read, containing one filename per line. All filenames listed inside <file> will be registered.
-register	Files specified with -f or -bulk will be registered in the dbmanifest table
-unregister	Files specified with -f or -bulk will be removed from the dbmanifest table

Notes:

- At least one of -f or -bulk is required.
 - If neither -register nor -unregister is specified, the default is '-register'.
 - File names specified with -f must either be fully-qualified or be relative to RETAIL_HOME. The same is true for filenames specified within a -bulk file.
 - Registering a file in the dbmanifest table will cause it to be completely skipped. Before doing so, ensure that all commands contained in it have been completed.
 - Removing a file from the dbmanifest table will cause it to be run again. This will fail if the commands in the script cannot be re-run. For example if they create a table that already exists.
-

Running the ordbmreg Script

Perform the following procedure to run the ordbmreg script:

1. Log in as the UNIX user that owns the product installation.
2. Set the RETAIL_HOME environment variable to the top-level directory of your product installation.
`export RETAIL_HOME=/u00/oretail/14.1/tst`
3. Set the PATH environment variable to include the orpatch/bin directory
`export PATH=$RETAIL_HOME/orphatch/bin:$PATH`
4. Execute ordbmreg script to register the desired file(s).
`ordbmreg -register -f <file>`

Examples of using the ordbmreg Script

Register

`$RETAIL_HOME/dbsql_rms/Cross_Pillar/db_change_scripts/source/000593_system_options.sql` with the dbmanifest table.

```
ordbmreg -f
dbsql_rms/Cross_Pillar/db_change_scripts/source/000593_system_options.sql
```

Remove the dbmanifest row for

`$RETAIL_HOME/dbsql_radm/ra_db/radm/database_change_scripts/000035_s12733240_w_party_per_d.sql`.

```
ordbmreg -unregister -f
$RETAIL_HOME/dbsql_radm/ra_db/radm/database_change_scripts/000035_s12733240_w_party_per_d.sql
```

Bulk register several files in the dbmanifest table.

```
echo "$RETAIL_HOME/dbsql_rwms/DBC/Source/000294_container.sql" > dbcs.txt
echo "$RETAIL_HOME/dbsql_rwms/DBC/Source/000457_drop_object.sql" >> dbcs.txt
ordbmreg -bulk dbcs.txt
```

Restarting after registration

Once the row has been added to the dbmanifest table, restart ORPatch and the script will be skipped. If the file is not skipped there are several possibilities:

- The script registered is not the failing script.
- The file type is not a type that is filtered by the dbmanifest. The only file types that skip files listed in the dbmanifest are:
 - Initial install DDL Files
 - Installation scripts that cannot be rerun
 - Database Change Scripts

Manual Restart State File Updates

Oracle Retail strongly discourages manually updating the ORPatch restart state files. Updating the file improperly could cause necessary steps in the patching process to be skipped or patches to be incorrectly recorded as applied.

DISPLAY Settings When Compiling Forms

When compiling RMS or RWMS forms, it is necessary to have a valid X-Windows Display. ORPatch allows this setting to come from one of two places:

- DISPLAY environment variable set before executing ORPatch
- or
- DISPLAY setting in RETAIL_HOME/orpatch/config/env_info.cfg

The DISPLAY variable in the environment overrides the env_info.cfg, if both are set. The destination X-Windows display must be accessible to the user running ORPatch, and for best compilation performance it should be on the network 'close' to the server where RMS Forms are installed and compiled. Using a local display or VNC display is preferred. Compiling forms across a Wide-Area Network will greatly increase the time required to apply patches to environments.

JAVA_HOME Setting

When working with Java application jar, ear or war files, it is necessary to have a valid JAVA_HOME setting. ORPatch allows this setting to come from one of two places:

- JAVA_HOME environment variable set before executing ORPatch
- or
- JAVA_HOME setting in RETAIL_HOME/orpatch/config/env_info.cfg

The JAVA_HOME variable in the environment overrides the env_info.cfg, if both are set. The specified Java home location must be accessible to the user running ORPatch and be a full Java Development Kit (JDK) installation. The JAVA_HOME must contain the jar utility and if automatic Jar file signing is configured, must also contain the keytool and jarsigner utilities.

Patching Prior to First Install

In some situations, it may be necessary to apply a patch to product installation files before the initial install. For example, if there is a defect with a script that would be run during the install and prevent proper installation. In this rare situation, it may be necessary to apply a patch to the installation files prior to starting installation.

Note: These steps should only be undertaken at the direction of Oracle Support.

Perform the following steps to patch installation files prior to starting an installation. The steps assume an RMS installation, but apply to any product supported by ORPatch:

1. Unzip the installation files to a staging area.

Note: The following steps assume the files are in
/media/oretail14.1

2. Locate the patch_info.cfg within the product media. The directory it resides in will be used for later steps.

```
find /media/oretail14.1/rms/installer -name patch_info.cfg
```

Output Example:

```
/media/oretail14.1/rms/installer/mom14/patch_info.cfg
```

3. Get the PATCH_NAME for the standard product installation. The patch name to use in subsequent steps will be the portion following the "=" sign.

```
grep "PATCH_NAME=" /media/oretail14.1/rms/installer/mom14/patch_info.cfg
```

Output Example:

```
PATCH_NAME=MOM_14_1_0_0
```

4. Create a directory that will contain the patch that must be applied, next to the directory with the product installation files.

Note: The following steps assume this directory is in
/media/patch.

5. Unzip the patch into the directory created in step 2.

Note: This should place the patch contents in
/media/patch/<patch num>.

6. Export RETAIL_HOME to point within the installation staging area.
- ```
export RETAIL_HOME=/media/oretail14.1/rms/installer/mom14/Build
```

7. Create a logs directory within the installation staging area

```
mkdir $RETAIL_HOME/orpatch/logs
```

8. Ensure the ORMerge shell script is executable.

```
chmod u+x $RETAIL_HOME/orpatch/bin/ormerge
```

9. Run ORMerge to apply the patch to the installation media, using a -name argument that is the same as what was found in step 3.

```
$RETAIL_HOME/orpatch/bin/ormerge -s /media/patch -d
/media/oretail14.1/rms/installer/mom14 -name MOM_14_1_0_0 -inplace
```

---

**Note:** The -inplace argument is critical to ensure that the  
patching replaces files in the mom14 directory.

---

10. Unset the RETAIL\_HOME environment variable.

```
unset RETAIL_HOME
```

At this point, the installation files will have been updated with the newer versions of files contained within the patch. Log files for the merge will be in  
/media/oretail14.1/rms/installer/mom14/Build/orpatch/logs.

## Providing Metadata to Oracle Support

In some situations, it may be necessary to provide details of the metadata from an environment to Oracle support in order to assist with investigating a patching or application problem. ORPatch provides built-in functionality through the 'exportmetadata' action to extract and consolidate metadata information for uploading to


Oracle Support or for external analysis. For more information, see the ORPatch 'Exporting Environment Metadata' section.

---

## Appendix: ReIM Application Installer Screens

You need the following details about your environment for the installer to successfully deploy the ReIM application. Depending on the options you select, you may not see some screens or fields.

### Screen: Startup

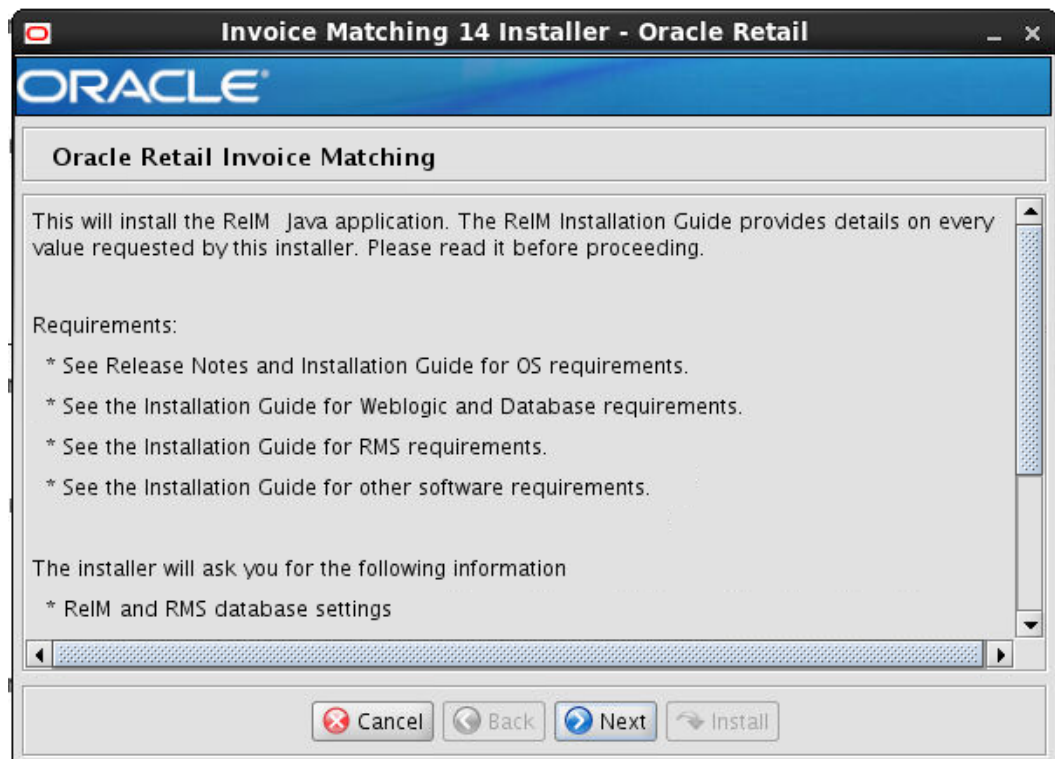

# Screen: ReIM Application RETAIL\_HOME

**Invoice Matching 14 Installer - Oracle Retail**

**ORACLE®**

**ReIM Application RETAIL\_HOME**

Please enter the directory where the ReIM application files and batch scripts will be installed. Please keep track of this directory, it should remain in place after installation and will be used to apply future patches.

ReIM Application RETAIL\_HOME

|                          |                                                                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Field Title</b>       | ReIM Application RETAIL_HOME                                                                                                                                                                            |
| <b>Field Description</b> | Retail Home is used to keep Orpatch related files, batches etc. by default. Please keep track of this directory, it should remain in place after installation and will be used to apply future patches. |
| <b>Examples</b>          | /path/to/reim_retail_home                                                                                                                                                                               |

**Screen: Host Details**

**Invoice Matching 14 Installer - Oracle Retail**

**ORACLE**

**Host Details**

Please enter the hostname that the component(s) will be installed on. This should match your current host.

Hostname

|                          |                                                                                                                  |
|--------------------------|------------------------------------------------------------------------------------------------------------------|
| <b>Field Title</b>       | Hostname                                                                                                         |
| <b>Field Description</b> | Provide the hostname where the Retail Home will be installed. This shall match your Application Server hostname. |
| <b>Examples</b>          | Apphostname                                                                                                      |

# Screen: Security Details

**Invoice Matching 14 Installer - Oracle Retail**

**ORACLE**

**Security Details**

Provide security details for the REIM application

Note: enabling SSL requires that security certificates have been configured and installed for this WebLogic domain. The AdminServer and all managed servers must then be configured to use SSL.

Enable SSL for REIM?

☒ Yes

☐ No

Cancel Back Next Install

|                          |                                                                                                                                                                                                                                                                                                                                                                   |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Field Title</b>       | Enable SSL for REIM?                                                                                                                                                                                                                                                                                                                                              |
| <b>Field Description</b> | <p>Choosing Yes will deploy ReIM using SSL and configure ReIM to use SSL. In this case, SSL must be configured and the ports must be enabled for the AdminServer and ReIM managed servers.</p> <p>Choosing No will deploy and configure ReIM without SSL. In this case the non-SSL ports must be enabled for the AdminServer and for the RPM managed servers.</p> |

**Screen: JDBC Security Details**

**Invoice Matching 14 Installer - Oracle Retail**

**ORACLE®**

**JDBC Security Details**

Enabling Secure JDBC requires that security certificates have been configured and installed for this WebLogic domain.

Enable Secure JDBC connection

☒ Yes  
☐ No

Cancel Back Next Install

|                          |                                                                                                                                                                              |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Field Title</b>       | Enable Secure JDBC connection                                                                                                                                                |
| <b>Field Description</b> | Select Yes to create secured data sources in WebLogic, otherwise choose No. A secure data base connection must already be set up if you want to create a secure data source. |

**Screen: Data Source Details**

**Invoice Matching 14 Installer - Oracle Retail**

**ORACLE**

**Data Source Details**

Provide the details for the Invoice Matching data source

ReIM/RMS JDBC URL

ReIM/RMS schema user

ReIM/RMS schema password

Enter the RMS schema owner. This is usually the same as the ReIM/RMS schema entered above

RMS schema owner

REIM schema user alias

(The alias for each username/password pair must be unique)

Cancel Back Next Install

|                          |                                                                                                                                                                                                                                                 |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Field Title</b>       | ReIM/RMS JDBC URL                                                                                                                                                                                                                               |
| <b>Field Description</b> | URL used by the ReIM application to access the ReIM/RMS database schema. See <a href="#">Appendix: URL Reference</a> for expected syntax.                                                                                                       |
| <b>Examples</b>          | For Non Secure JDBC Connection: jdbc:oracle:thin:@hostname:1521/dbname<br>For Secure JDBC Connection:<br>jdbc:oracle:thin:@(DESCRIPTION=(ADDRESS_LIST=(ADDRESS=(PROTOCOL=tcps)(HOST=dbhostname)(PORT=2484)))(CONNECT_DATA=(SERVICE_NAME=mydb))) |

|                          |                                                                                                                                          |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Field Title</b>       | ReIM/RMS schema user                                                                                                                     |
| <b>Field Description</b> | RMS database user for accessing the ReIM tables. This should match what was given in the RMS schema field of the RMS database installer. |
| <b>Example</b>           | rms01app                                                                                                                                 |

|                          |                                                                             |
|--------------------------|-----------------------------------------------------------------------------|
| <b>Field Title</b>       | ReIM/RMS schema password                                                    |
| <b>Field Description</b> | Password for the RMS database user entered above to access the ReIM tables. |

|                          |                                                                                                                              |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------|
| <b>Field Title</b>       | RMS schema owner                                                                                                             |
| <b>Field Description</b> | Database user which owns the RMS and ReIM tables. This usually has the same value as the <b>ReIM/RMS schema</b> field above. |
| <b>Example</b>           | rms01                                                                                                                        |

|                          |                                                                                                                                                                                                                     |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Field Title</b>       | REIM schema user alias                                                                                                                                                                                              |
| <b>Field Description</b> | The alias to store the schema credentials.                                                                                                                                                                          |
| <b>Example</b>           | db-alias                                                                                                                                                                                                            |
| <b>Note</b>              | This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application. |

## Screen: Secure Data Source Details

**Secure Data Source Details**

Provide the details for the REIM secure data source

|                                |                       |
|--------------------------------|-----------------------|
| Identity Keystore              | /home/sample.keystore |
| Identity Keystore Type         | JKS                   |
| Identity Keystore Passphrase   | .....                 |
| Identity truststore            | /home/test.keystore   |
| Identity truststore Type       | JKS                   |
| Identity truststore Passphrase | .....                 |

Buttons: Cancel, Back, Next, Install

---

**Note:** This screen appears only if you have enabled SSL for ReIM. Ignore this step in case you have not enabled SSL for ReIM.

---

| Field Title       | Identity Keystore                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Field Description | Keystores ensure the secure storage and management of private keys and trusted certificate authorities (CAs). This screen lets you provide the keystore to be used for datasource connection These settings help you to manage the security of message transmissions. For further information, please refer <i>MOM security Guide</i> .<br>Location or path where identity keystore file is stored. |

| Field Title       | Identity Keystore Type                              |
|-------------------|-----------------------------------------------------|
| Field Description | Type of the identity keystore used.<br>Example: jks |

| Field Title       | Identity Keystore Passphrase                         |
|-------------------|------------------------------------------------------|
| Field Description | The password to access the keystore mentioned above. |

|                          |                                                            |
|--------------------------|------------------------------------------------------------|
| <b>Field Title</b>       | Identity truststore                                        |
| <b>Field Description</b> | Location or path where identity truststore file is stored. |

|                          |                                                       |
|--------------------------|-------------------------------------------------------|
| <b>Field Title</b>       | Identity truststore Type                              |
| <b>Field Description</b> | Type of the identity truststore used.<br>Example: jks |

|                          |                                                        |
|--------------------------|--------------------------------------------------------|
| <b>Field Title</b>       | Identity truststore Passphrase                         |
| <b>Field Description</b> | The password to access the truststore mentioned above. |

## Screen: Application Deployment Details

**Invoice Matching 14 Installer - Oracle Retail**

**ORACLE**

**Application Deployment Details**

The default values shown below are examples

ReIM app deployment name

ReIM context root

Enter the REIM weblogic managed server or cluster.

REIM server/cluster

|                          |                                                                              |
|--------------------------|------------------------------------------------------------------------------|
| <b>Field Title</b>       | ReIM app deployment name                                                     |
| <b>Field Description</b> | Name by which this ReIM application is identified in the application server. |
| <b>Example</b>           | reim14                                                                       |

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Field Title</b>       | ReIM context root                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Field Description</b> | <p>The Client Context Root determines how the ReIM application will be accessed from users' web browsers. The ReIM client URL has the following format:</p> <p>https://&lt;hostname&gt;:&lt;port&gt;/&lt;reim_client_ctx_root&gt;/index.jsp OR<br/> http://&lt;hostname&gt;:&lt;port&gt;/&lt;reim_client_ctx_root&gt;/index.jsp</p> <p>Example, with ReIM Client Context Root:</p> <p><a href="https://hostname:23002/reim/index.jsp">https://hostname:23002/reim/index.jsp</a></p> |
| <b>Example</b>           | Reim                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

|                          |                                                      |
|--------------------------|------------------------------------------------------|
| <b>Field Title</b>       | ReIM server /cluster                                 |
| <b>Field Description</b> | Name of the ReIM WebLogic managed server or cluster. |
| <b>Example</b>           | reim-server                                          |

# Screen: WebLogic Administrative User

**Weblogic Administrative User**

Enter the administrative user and password for the Weblogic Server to which the application will be deployed.

Hostname:

Weblogic admin port:

Weblogic admin user:

Weblogic admin password:

Weblogic admin alias:

(The alias for each username/password pair must be unique)

Buttons:

|                          |                                                                    |
|--------------------------|--------------------------------------------------------------------|
| <b>Field Title</b>       | Hostname                                                           |
| <b>Field Description</b> | The hostname of the server where the WebLogic server is installed. |
| <b>Example</b>           | Hostname                                                           |

|                          |                                             |
|--------------------------|---------------------------------------------|
| <b>Field Title</b>       | WebLogic admin port                         |
| <b>Field Description</b> | This is the port of Administration Console. |
| <b>Example</b>           | 23002                                       |

|                          |                                                                                                        |
|--------------------------|--------------------------------------------------------------------------------------------------------|
| <b>Field Title</b>       | WebLogic admin user                                                                                    |
| <b>Field Description</b> | User name of the admin user for the WebLogic instance to which the ReIM application is being deployed. |
| <b>Example</b>           | weblogic                                                                                               |

|                          |                                                                                                                                                           |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Field Title</b>       | WebLogic admin password                                                                                                                                   |
| <b>Field Description</b> | Password for the WebLogic admin user. You chose this password when you created the WebLogic instance or when you started the instance for the first time. |

|                          |                                                                                                                                                                                                                      |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Field Title</b>       | WebLogic admin alias                                                                                                                                                                                                 |
| <b>Field Description</b> | An alias for the WebLogic admin user.                                                                                                                                                                                |
| <b>Example</b>           | weblogic-alias                                                                                                                                                                                                       |
| <b>Note</b>              | This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and problems issues with the application. |

# Screen: LDAP Directory Server Details

**LDAP Directory Server Details**

ReIM requires the use of an LDAP directory for storage of its user, role, and store entries. Please provide the details for your LDAP directory.

Note: If the ldap server is configured to use SSL, use ldaps as the protocol. Otherwise use ldap.

LDAP Server URL

Enter the search base DN. This is a directory entry under which ReIM will search for user and store entries

LDAP Search Base DN

LDAP Group DN

Enter the search user DN. ReIM will authenticate to the LDAP directory as this entry.

Search User DN

Search User Password

|                          |                                                                                     |
|--------------------------|-------------------------------------------------------------------------------------|
| <b>Field Title</b>       | LDAP server URL                                                                     |
| <b>Field Description</b> | The URL for your LDAP directory server.                                             |
| <b>Example</b>           | For Non Secure LDAP: ldap://hostname:3060<br>For Secure LDAP: ldaps:// hostname:389 |

|                          |                                                                                                |
|--------------------------|------------------------------------------------------------------------------------------------|
| <b>Field Title</b>       | LDAP Search Base DN                                                                            |
| <b>Field Description</b> | The distinguished name of the directory in which ReIM user exists to authenticate to the LDAP. |
| <b>Example</b>           | cn=Users,dc=us,dc=oracle,dc=com                                                                |

|                          |                                                                                       |
|--------------------------|---------------------------------------------------------------------------------------|
| <b>Field Title</b>       | LDAP Group DN                                                                         |
| <b>Field Description</b> | Distinguished name of the group that ReIM uses to authenticate to the LDAP directory. |
| <b>Example</b>           | cn=Groups,dc=us,dc=oracle,dc=com                                                      |

|                          |                                                                                          |
|--------------------------|------------------------------------------------------------------------------------------|
| <b>Field Title</b>       | Search User DN                                                                           |
| <b>Field Description</b> | The distinguished name of the user that ReIM uses to authenticate to the LDAP directory. |
| <b>Example</b>           | cn=REIM.ADMIN,cn=Users,dc=us,dc=oracle,dc=com                                            |

|                          |                                      |
|--------------------------|--------------------------------------|
| <b>Field Title</b>       | Search user password                 |
| <b>Field Description</b> | The password for the search user DN. |
| <b>Example</b>           | Search User Password                 |

|                          |                                                                                                                                                                                                                     |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Field Title</b>       | Search User Alias                                                                                                                                                                                                   |
| <b>Field Description</b> | The alias for the search user DN.                                                                                                                                                                                   |
| <b>Example</b>           | Ldap-user-alias                                                                                                                                                                                                     |
| <b>Notes</b>             | This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application. |

# Screen: WebLogic Webservice Account Validation Details

**Weblogic Webservice Account Validation Details**

Provide the details for the Invoice Matching Weblogic Webservice Account Validation

Webservice Account Validation Drill WSDL

Webservice Account Validation

Webservice Account Validation Namespace

Webservice Account Validation Drill URL Target Namespace

URL Target Namespace


|                          |                                                                                                                                                                                                                                                                                           |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Field Title</b>       | Webservice Account Validation Drill                                                                                                                                                                                                                                                       |
| <b>Field Description</b> | The Web service provider URL used for drilling forward from the ReIM application. This information is from the financial application to which you are integrating (for example, Oracle E-Business Suite). Leave this field blank if there is no integration with a financial application. |
| <b>Example</b>           | <a href="https://hostname:18008/fin-DrillBackForwardUrl-AppServiceDecorator/ProxyService/DrillBackForwardUrlAppServiceProxy?wsdl">https://hostname:18008/fin-DrillBackForwardUrl-AppServiceDecorator/ProxyService/DrillBackForwardUrlAppServiceProxy?wsdl</a>                             |

|                          |                                                                                                                                                                                                                                                               |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Field Title</b>       | Webservice Account Validation                                                                                                                                                                                                                                 |
| <b>Field Description</b> | The URL for validating Web service accounts. This information is from the financial application to which you are integrating (for example, Oracle E-Business Suite). Leave this field blank if there is no integration with a financial application.          |
| <b>Example</b>           | <a href="https://hostname:18008/fin-GIAccountValidation-AppServiceDecorator/ProxyService/GIAccountValidationAppServiceProxy?wsdl">https://hostname:18008/fin-GIAccountValidation-AppServiceDecorator/ProxyService/GIAccountValidationAppServiceProxy?wsdl</a> |

|                          |                                                                                                                                                                                                                                                           |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Field Title</b>       | Webservice Account Validation Namespace                                                                                                                                                                                                                   |
| <b>Field Description</b> | The URL for validating the Web service namespace. This information is from the financial application to which you are integrating (for example, Oracle E-Business Suite). Leave this field blank if there is no integration with a financial application. |
| <b>Example</b>           | <a href="http://www.oracle.com/retail/fin/integration/services/GIAccountValidationService/v1">http://www.oracle.com/retail/fin/integration/services/GIAccountValidationService/v1</a>                                                                     |

|                          |                                                                                                                                                                                                      |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Field Title</b>       | URL Target Namespace                                                                                                                                                                                 |
| <b>Field Description</b> | The namespace URI used to build the qualified name for the SOAP-Based Drill Forward Webservice that ReIM will consume. It should match the targetNamespace property as defined in the matching WSDL. |
| <b>Example</b>           | <a href="http://www.oracle.com/retail/fin/integration/services/DrillBackForwardUrlService/v1">http://www.oracle.com/retail/fin/integration/services/DrillBackForwardUrlService/v1</a>                |

### Screen: Enable WebLogic Webservice Account Validation Credentials

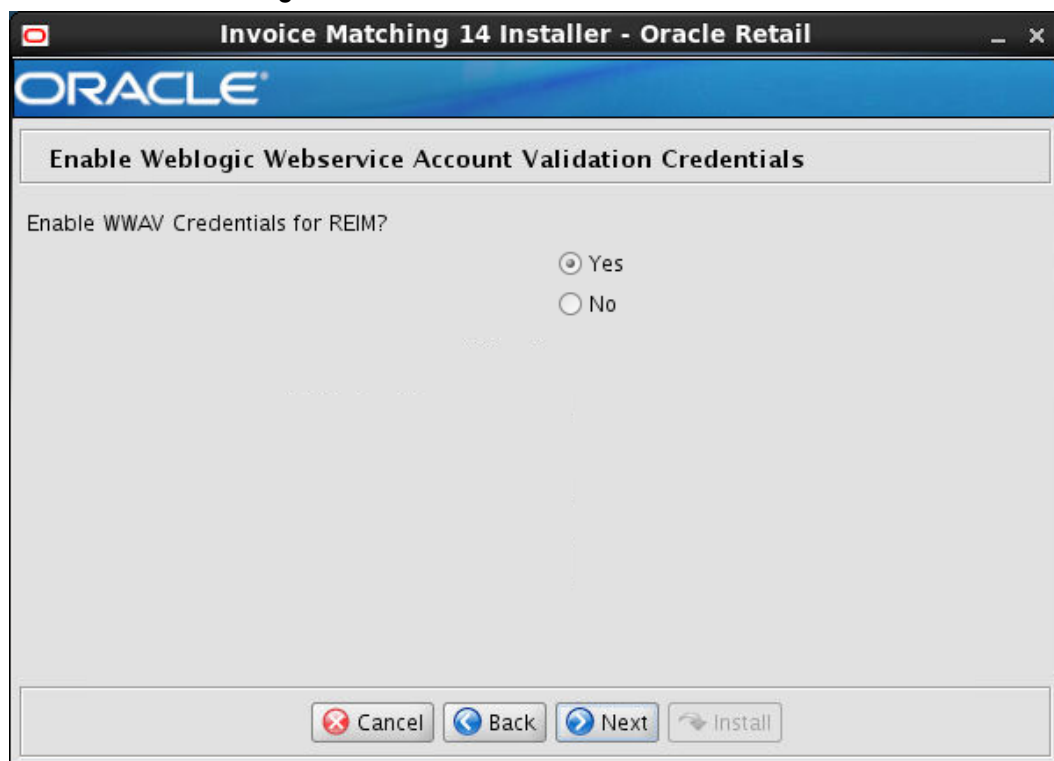

|                          |                                                                                                                                                                                                                                                                                                    |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Field Title</b>       | Enable WWAV Credentials for REIM?                                                                                                                                                                                                                                                                  |
| <b>Field Description</b> | <p>If the webservices entered in the above screen have security validation, choose Yes.</p> <p>Choosing Yes will navigate you to the screen asking for WebLogic Webservice Account Validation Credentials. Choosing No will skip the WebLogic Webservice Account Validation Credentials screen</p> |

**Screen: WebLogic Webservice Account Validation Credentials**

**Weblogic Webservice Account Validation Credentials**

Provide the credentials for the Invoice Matching Webservice Account Validation.

Webservice Account Validation user: RETAIL.USER

Webservice Account Validation password: .....

Webservice Account Validation user alias: webservice-alias

(The alias for each username/password pair must be unique)

Buttons: Cancel, Back, Next, Install

---

**Note:** This screen appears only if you have enabled WWAV Credentials for ReIM. Ignore this step in case you have not enabled WWAV Credentials for ReIM.

---

|                          |                                                    |
|--------------------------|----------------------------------------------------|
| <b>Field Title</b>       | Webservice Account Validation user                 |
| <b>Field Description</b> | Enter the username for validating the Web service. |
| <b>Example</b>           | RETAIL.USER                                        |

|                          |                                                                               |
|--------------------------|-------------------------------------------------------------------------------|
| <b>Field Title</b>       | Webservice Account Validation Password                                        |
| <b>Field Description</b> | The password of the above username which is used to validate the Web service. |

|                          |                                                                                                                                                                                                                     |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Field Title</b>       | Webservice Account Validation Alias                                                                                                                                                                                 |
| <b>Field Description</b> | The alias for the Web service account user name.                                                                                                                                                                    |
| <b>Example</b>           | webservice-alias                                                                                                                                                                                                    |
| <b>Note</b>              | This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application. |

**Screen: Batch User Credentials**

**Invoice Matching 14 Installer - Oracle Retail**

**ORACLE®**

**Batch User Credentials**

Provide the credentials for the Batch User

Batch user

Batch User password

Batch user alias

(The alias for each username/password pair must be unique)

|                          |                                                                 |
|--------------------------|-----------------------------------------------------------------|
| <b>Field Title</b>       | Batch User                                                      |
| <b>Field Description</b> | This shall be a valid user that can login into the application. |
| <b>Example</b>           | ADMIN                                                           |

|                          |                                                               |
|--------------------------|---------------------------------------------------------------|
| <b>Field Title</b>       | Batch User Password                                           |
| <b>Field Description</b> | The password of the user that can login into the application. |

|                          |                                                                                                                                                                                                                     |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Field Title</b>       | Batch User Alias                                                                                                                                                                                                    |
| <b>Field Description</b> | The alias for the user running ReIM batch. This alias is part of ORACLE wallet implementation. You will use this alias when running ReIM batch scripts.                                                             |
| <b>Example</b>           | batch-alias                                                                                                                                                                                                         |
| <b>Note</b>              | This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application. |

**Screen: Turn off the application server's non-SSL port**


---

**Note:** This screen appears only if you have enabled SSL for ReIM. Ignore this step in case you have not enabled SSL for ReIM.

---

|                          |                                                                                                                                         |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| <b>Field Title</b>       | Disable non-SSL port?                                                                                                                   |
| <b>Field Description</b> | Choosing Yes disables the non SSL port on the managed server. Choosing no will the leave the non SSL port of the managed server active. |

# Screen: Installation Summary

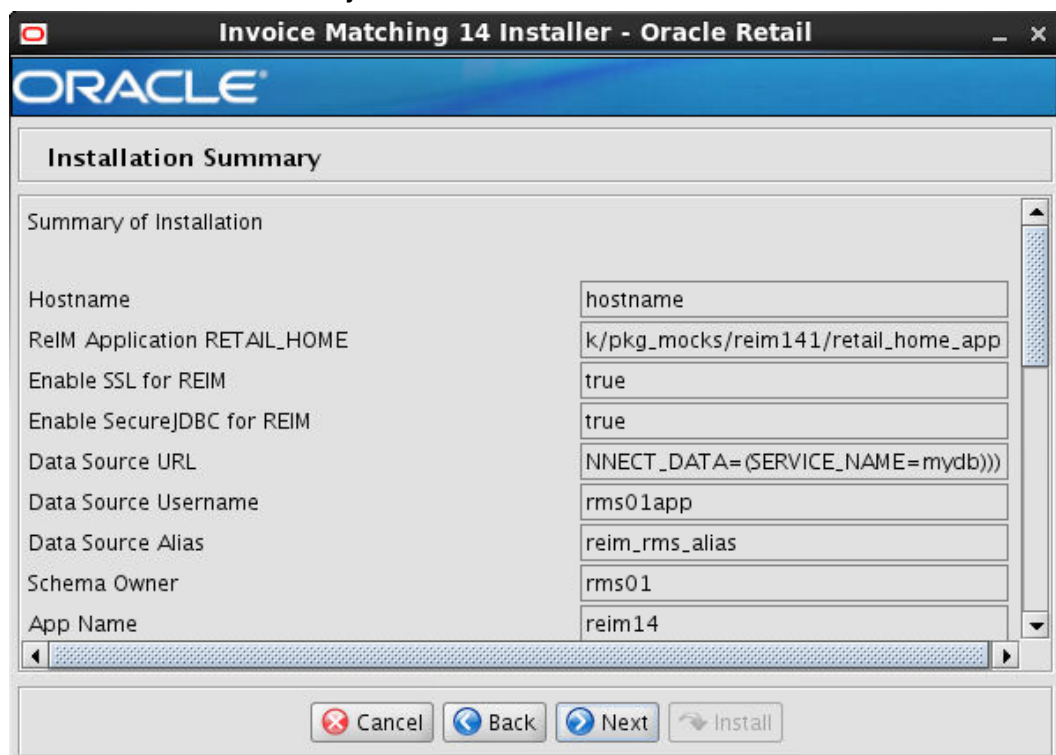

**Invoice Matching 14 Installer - Oracle Retail**

**ORACLE**

**Installation Summary**

Summary of Installation

|                              |                                     |
|------------------------------|-------------------------------------|
| Hostname                     | hostname                            |
| ReIM Application RETAIL_HOME | k/pkg_mocks/reim141/retail_home_app |
| Enable SSL for REIM          | true                                |
| Enable SecureJDBC for REIM   | true                                |
| Data Source URL              | NNECT_DATA=(SERVICE_NAME=mydb)))    |
| Data Source Username         | rms01app                            |
| Data Source Alias            | reim_rms_alias                      |
| Schema Owner                 | rms01                               |
| App Name                     | reim14                              |

---

## Appendix: Single Sign-On for WebLogic

Single Sign-On (SSO) is a term for the ability to sign onto multiple Web applications via a single user ID/Password. There are many implementations of SSO. Oracle provides an implementation with Oracle Access Manager.

Most, if not all, SSO technologies use a session cookie to hold encrypted data passed to each application. The SSO infrastructure has the responsibility to validate these cookies and, possibly, update this information. The user is directed to log on only if the cookie is not present or has become invalid. These session cookies are restricted to a single browser session and are never written to a file.

Another facet of SSO is how these technologies redirect a user's Web browser to various servlets. The SSO implementation determines when and where these redirects occur and what the final screen shown to the user is.

Most SSO implementations are performed in an application's infrastructure and not in the application logic itself. Applications that leverage infrastructure managed authentication (such as deployment specifying Basic or Form authentication) typically have little or no code changes when adapted to work in an SSO environment.

### What Do I Need for Single Sign-On?

A Single Sign-On system involves the integration of several components, including Oracle Identity Management and Oracle Access Management. This includes the following components:

- An Oracle Internet Directory (OID) LDAP server, used to store user, role, security, and other information. OID uses an Oracle database as the back-end storage of this information.
- An Oracle Access Manager (OAM) 11g Release 2 server and administrative console for implementing and configuring policies for single sign-on.
- A Policy Enforcement Agent such as Oracle Access Manager 11g Agent (WebGate), used to authenticate the user and create the Single Sign-On cookies.
- Oracle Directory Services Manager (ODSM) application in OIM11g, used to administer users and group information. This information may also be loaded or modified via standard LDAP Data Interchange Format (LDIF) scripts.
- Additional administrative scripts for configuring the OAM system and registering HTTP servers.

Additional WebLogic managed servers will be needed to deploy the business applications leveraging the Single Sign-On technology.

### Can Oracle Access Manager Work with Other SSO Implementations?

Yes, Oracle Access Manager has the ability to interoperate with many other SSO implementations, but some restrictions exist.

## Oracle Single Sign-on Terms and Definitions

The following terms apply to single sign-on.

### Authentication

Authentication is the process of establishing a user's identity. There are many types of authentication. The most common authentication process involves a user ID and password.

### Dynamically Protected URLs

A Dynamically Protected URL is a URL whose implementing application is aware of the Oracle Access Manager environment. The application may allow a user limited access when the user has not been authenticated. Applications that implement dynamic protection typically display a Login link to provide user authentication and gain greater access to the application's resources.

### Oracle Identity Management (OIM) and Oracle Access Manager (OAM) for 11g

Oracle Identity Management (OIM) 11g includes Oracle Internet Directory and ODSM. Oracle Access Manager (OAM) 11g R2 should be used for SSO using WebGate. Oracle Forms 11g contains Oracle HTTP server and other Retail Applications will use Oracle WebTier11g for HTTP Server.

### MOD\_WEBLOGIC

mod\_WebLogic operates as a module within the HTTP server that allows requests to be proxied from the OracleHTTP server to the Oracle WebLogic server.

### Oracle Access Manager 11g Agent (WebGate)

Oracle WebGates are policy enforcement agents which reside with relying parties and delegate authentication and authorization tasks to OAM servers.

### Oracle Internet Directory

Oracle Internet Directory (OID) is an LDAP-compliant directory service. It contains user ids, passwords, group membership, privileges, and other attributes for users who are authenticated using Oracle Access Manager.

### Partner Application

A partner application is an application that delegates authentication to the Oracle Identity Management Infrastructure. One such partner application is the Oracle HTTP Server (OHS) supplied with Oracle Forms Server or WebTier11g Server if using other Retail Applications other than Oracle Forms Applications.

All partner applications must be registered with Oracle Access Manager (OAM) 11g. An output product of this registration is a configuration file the partner application uses to verify a user has been previously authenticated.

### Statically Protected URLs

A URL is considered to be Statically Protected when an Oracle HTTP server is configured to limit access to this URL to only SSO authenticated users. Any unauthenticated attempt to access a Statically Protected URL results in the display of a login page or an error page to the user.

Servlets, static HTML pages, and JSP pages may be statically protected.

## What Single Sign-On is not

Single Sign-On is NOT a user ID/password mapping technology.

However, some applications can store and retrieve user IDs and passwords for non-SSO applications within an OID LDAP server. An example of this is the Oracle Forms Web Application framework, which maps Single Sign-On user IDs to a database logins on a per-application basis.

## How Oracle Single Sign-On Works

Oracle Access Manager involves several different components. These are:

- The Oracle Access Manager (OAM) server, which is responsible for the back-end authentication of the user.
- The Oracle Internet Directory LDAP server, which stores user IDs, passwords, and group (role) membership.
- The Oracle Access Manager Agent associated with the Web application, which verifies and controls browser redirection to the Oracle Access Manager server.
- If the Web application implements dynamic protection, then the Web application itself is involved with the OAM system.


### About SSO Login Processing with OAM Agents

1. The user requests a resource.
2. Webgate forwards the request to OAM for policy evaluation
3. OAM:
  - a. Checks for the existence of an SSO cookie.
  - b. Checks policies to determine if the resource is protected and if so, how?
4. OAM Server logs and returns the decision
5. Webgate responds as follows:
  - **Unprotected Resource:** Resource is served to the user
  - **Protected Resource:**  
Resource is redirected to the credential collector.  
The login form is served based on the authentication policy.  
Authentication processing begins
6. User sends credentials
7. OAM verifies credentials
8. OAM starts the session and creates the following host-based cookies:
  - **One per partner:** OAMAuthnCookie set by 11g WebGates using authentication token received from the OAM Server after successful authentication.  
**Note:** A valid cookie is required for a session.
  - **One for OAM Server:** OAM\_ID
9. OAM logs Success or Failure.
10. Credential collector redirects to WebGate and authorization processing begins.
11. WebGate prompts OAM to look up policies, compare them to the user's identity, and determine the user's level of authorization.
12. OAM logs policy decision and checks the session cookie.
13. OAM Server evaluates authorization policies and cache the result.
14. OAM Server logs and returns decisions

15. WebGate responds as follows:

- If the authorization policy allows access, the desired content or applications are served to the user.
- If the authorization policy denies access, the user is redirected to another URL determined by the administrator.

### SSO Login Processing with OAM Agents

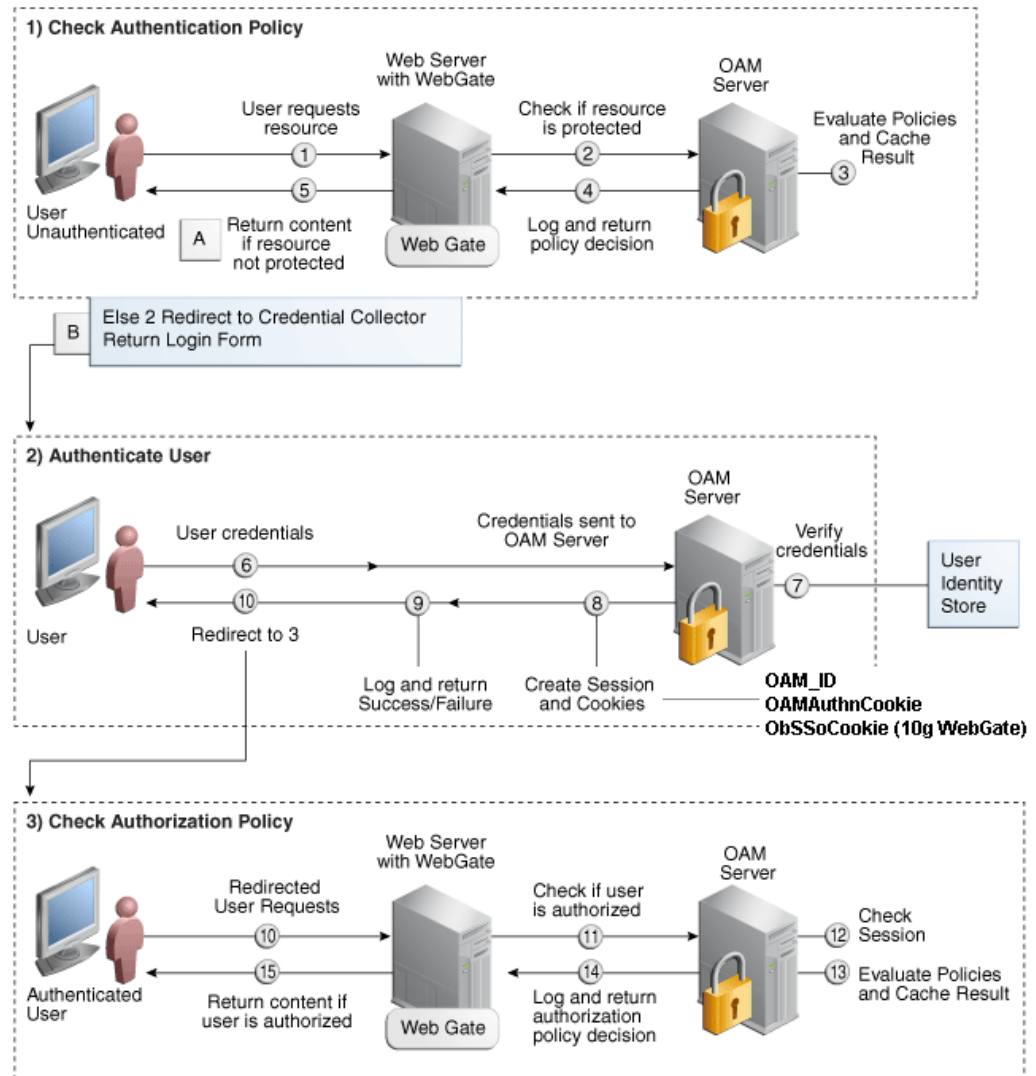

## Installation Overview

Installing an Oracle Retail supported Single Sign-On installation using OAM11g requires installation of the following:

1. Oracle Internet Directory (OID) LDAP server and the Oracle Directory Services Manager. They are typically installed using the Installer of Oracle Identity Management . The ODSM application can be used for user and realm management within OID.
2. Oracle Access Manager 11gR2 has to be installed and configured.
3. Additional midtier instances (such as Oracle Forms 11gr2) for Oracle Retail applications based on Oracle Forms technologies (such as RMS). These instances must be registered with the OAM installed in step 2.
4. Additional application servers to deploy other Oracle Retail applications and performing application specific initialization and deployment activities must be registered with OAM installed in step 2.

### Infrastructure Installation and Configuration

The Infrastructure installation for Oracle Access Manager (OAM) is dependent on the environment and requirements for its use. Deploying Oracle Access Manager (OAM) to be used in a test environment does not have the same availability requirements as for a production environment. Similarly, the Oracle Internet Directory (OID) LDAP server can be deployed in a variety of different configurations. See the *Oracle Identity Management Installation Guide*11g.

### OID User Data

Oracle Internet Directory is an [LDAP v3](#) compliant directory server. It provides standards-based user definitions out of the box.

Customers with existing corporate LDAP implementations may need to synchronize user information between their existing LDAP directory servers and OID. OID supports standard LDIF file formats and provides a JNDI compliant set of Java classes as well. Moreover, OID provides additional synchronization and replication facilities to integrate with other corporate LDAP implementations.

Each user ID stored in OID has a specific record containing user specific information. For role-based access, groups of users can be defined and managed within OID. Applications can thus grant access based on group (role) membership saving administration time and providing a more secure implementation.

## User Management

User Management consists of displaying, creating, updating or removing user information. There are many methods of managing an LDAP directory including LDIF scripts or Oracle Directory Services Manager (ODSM) available for OID11g.

### ODSM

Oracle Directory Services Manager (ODSM) is a Web-based application used in OID11g is designed for both administrators and users which enables you to configure the structure of the directory, define objects in the directory, add and configure users, groups, and other entries. ODSM is the interface you use to manage entries, schema, security, adapters, extensions, and other directory features.

### **LDIF Scripts**

Script based user management can be used to synchronize data between multiple LDAP servers. The standard format for these scripts is the LDAP Data Interchange Format (LDIF). OID supports LDIF script for importing and exporting user information. LDIF scripts may also be used for bulk user load operations.

### **User Data Synchronization**

The user store for Oracle Access Manager resides within the Oracle Internet Directory (OID) LDAP server. Oracle Retail applications may require additional information attached to a user name for application-specific purposes and may be stored in an application-specific database. Currently, there are no Oracle Retail tools for synchronizing changes in OID stored information with application-specific user stores. Implementers should plan appropriate time and resources for this process. Oracle Retail strongly suggests that you configure any Oracle Retail application using an LDAP for its user store to point to the same OID server used with Oracle Access Manager.

---

---

## Appendix: URL Reference

Both the database schema and application installers for the Invoice Matching product require certain URLs, including the following.

### JDBC URL for a Database

Used by the Java application and by the installer to connect to the database.

Thick Client Syntax: jdbc:oracle:thin:@<sid>

<sid>: system identifier for the database

---

---

**Example:** jdbc:oracle:oci:@mysid

---

---

Thin Client Syntax: jdbc:oracle:thin:@<host>:<port>/servicename<host>: hostname of the database server

<port>: database listener port

< servicename>: Service Name for the database

---

---

**Example:** jdbc:oracle:thin:@myhost:1521/servicename

---

---



---

## Appendix: Common Installation Errors

This section provides some common errors encountered during installation of ReIM.

### ConcurrentModificationException in Installer GUI

#### Symptom

In GUI mode, the Errors tab shows the following error:

```
java.util.ConcurrentModificationException
 at
java.util.AbstractList$Itr.checkForComodification(AbstractList.java:448)
 at java.util.AbstractList$Itr.next(AbstractList.java:419)
... etc
```

#### Solution

You can ignore this error. It is related to third-party Java Swing code for rendering of the installer GUI and does not affect the retail product installation.

### Warning: Could not find X Input Context

#### Symptom

The following text appears in the console window during execution of the installer in GUI mode:

```
Couldn't find X Input Context
```

#### Solution

This message is harmless and can be ignored.

### GUI screens fail to open when running Installer

#### Symptom

When running the installer in GUI mode, the screens fail to open and the installer ends, returning to the console without an error message. The ant.install.log file contains this error:

```
Fatal exception: Width (0) and height (0) cannot be <= 0
java.lang.IllegalArgumentException: Width (0) and height (0) cannot be <= 0
```

#### Solution

This error is encountered when Antinstaller is used in GUI mode with certain X Servers. To work around this issue, copy ant.install.properties.sample to ant.install.properties and rerun the installer.

## Hostname Verification Error when SSL is used

### Symptom:

The Application installer fails saying that the reim-server could not restart with the below error.

```
[exec] This Exception occurred at Thu Nov 14 04:20:39 EST 2013.
[exec] javax.naming.CommunicationException [Root exception is
java.net.ConnectException: t3s://msp52420:15004: Destination unreachable; nested
exception is:
[exec] javax.net.ssl.SSLKeyException: [Security:090504]Certificate chain
received from msp52420 - 10.141.53.240 failed hostname verification check.
Certificate contained msp52420.us.oracle.com but check expected msp52420; No
available router to destination]
```

### Solution:

Provide the complete hostname in the “Host Details” field of the installer screen (i.e., msp52420.us.oracle.com instead of msp5240) and the install will go through successfully.

---

## Appendix: Setting Up Password Stores with wallets/credential stores

As part of an application installation, administrators must set up password stores for user accounts using wallets/credential stores. Some password stores must be installed on the application database side. While the installer handles much of this process, the administrators must perform some additional steps.

Password stores for the application and application server user accounts must also be installed; however, the installer takes care of this entire process.

ORACLE Retail Merchandising applications now have 3 different types of password stores. They are database wallets, java wallets, and database credential stores. Background and how to administer them below are explained in this appendix

### About Database Password Stores and Oracle Wallet

Oracle databases have allowed other users on the server to see passwords in case database connect strings (username/password@db) were passed to programs. In the past, users could navigate to `ps -ef|grep <username>` to see the password if the password was supplied in the command line when calling a program.

To make passwords more secure, Oracle Retail has implemented the Oracle Software Security Assurance (OSSA) program. Sensitive information such as user credentials now must be encrypted and stored in a secure location. This location is called password stores or wallets. These password stores are secure software containers that store the encrypted user credentials.

Users can retrieve the credentials using aliases that were set up when encrypting and storing the user credentials in the password store. For example, if username/password@db is entered in the command line argument and the alias is called db\_username, the argument to a program is as follows:

```
sqlplus /@db_username
```

This would connect to the database as it did previously, but it would hide the password from any system user.

After this is configured, as in the example above, the application installation and the other relevant scripts are no longer needed to use embedded usernames and passwords. This reduces any security risks that may exist because usernames and passwords are no longer exposed.

When the installation starts, all the necessary user credentials are retrieved from the Oracle Wallet based on the alias name associated with the user credentials.

There are three different types of password stores. One type explain in the next section is for database connect strings used in program arguments (such as sqlplus /@db\_username). The others are for Java application installation and application use.

## Setting Up Password Stores for Database User Accounts

After the database is installed and the default database user accounts are set up, administrators must set up a password store using the Oracle wallet. This involves assigning an alias for the username and associated password for each database user account. The alias is used later during the application installation. This password store must be created on the system where the application server and database client are installed.

This section describes the steps you must take to set up a wallet and the aliases for the database user accounts. For more information on configuring authentication and password stores, see the *Oracle Database Security Guide*.

---

**Note:** In this section, `<wallet_location>` is a placeholder text for illustration purposes. Before running the command, ensure that you specify the path to the location where you want to create and store the wallet.

---

To set up a password store for the database user accounts, perform the following steps:

1. Create a wallet using the following command:

```
mkstore -wrl <wallet_location> -create
```

After you run the command, a prompt appears. Enter a password for the Oracle Wallet in the prompt.

---

**Note:** The `mkstore` utility is included in the Oracle Database Client installation.

---

The wallet is created with the auto-login feature enabled. This feature enables the database client to access the wallet contents without using the password. For more information, refer to the *Oracle Database Advanced Security Administrator's Guide*.

2. Create the database connection credentials in the wallet using the following command:

```
mkstore -wrl <wallet_location> -createCredential <alias-name> <database-user-name>
```

After you run the command, a prompt appears. Enter the password associated with the database user account in the prompt.

3. Repeat Step 2 for all the database user accounts.

4. Update the `sqlnet.ora` file to include the following statements:

```
WALLET_LOCATION = (SOURCE = (METHOD = FILE) (METHOD_DATA = (DIRECTORY =
<wallet_location>)))
SQLNET.WALLET_OVERRIDE = TRUE
SSL_CLIENT_AUTHENTICATION = FALSE
```

5. Update the `tnsnames.ora` file to include the following entry for each alias name to be set up.

```
<alias-name> =
 (DESCRIPTION =
 (ADDRESS_LIST =
 (ADDRESS = (PROTOCOL = TCP) (HOST = <host>) (PORT = <port>))
)
 (CONNECT_DATA =
 (SERVICE_NAME = <service>)
)
)
```

In the previous example, <alias-name>, <host>, <port>, and <service> are placeholder text for illustration purposes. Ensure that you replace these with the relevant values.

## Setting up Wallets for Database User Accounts

The following examples show how to set up wallets for database user accounts for the following applications:

- [For RMS, RWMS, RPM Batch using sqlplus or sqlldr, RETL, RMS, RWMS, and ARI](#)

### For RMS, RWMS, RPM Batch using sqlplus or sqlldr, RETL, RMS, RWMS, and ARI

To set up wallets for database user accounts, do the following.

1. Create a new directory called wallet under your folder structure.

```
cd /projects/rms14/dev/
mkdir .wallet
```

---

**Note:** The default permissions of the wallet allow only the owner to use it, ensuring the connection information is protected. If you want other users to be able to use the connection, you must adjust permissions appropriately to ensure only authorized users have access to the wallet.

---

2. Create a sqlnet.ora in the wallet directory with the following content.

```
WALLET_LOCATION = (SOURCE = (METHOD = FILE) (METHOD_DATA =
(DIRECTORY = /projects/rms14/dev/.wallet)))
SQLNET.WALLET_OVERRIDE=TRUE
SSL_CLIENT_AUTHENTICATION=FALSE
```

---

**Note:** WALLET\_LOCATION must be on line 1 in the file.

---

3. Setup a tnsnames.ora in the wallet directory. This tnsnames.ora includes the standard tnsnames.ora file. Then, add two custom tns\_alias entries that are only for use with the wallet. For example, sqlplus /@dvols29\_rms01user.

```
ifile = /u00/oracle/product/11.2.0.1/network/admin/tnsnames.ora
```

Examples for a NON pluggable db:

```
dvols29_rms01user =
 (DESCRIPTION = (ADDRESS_LIST = (ADDRESS = (PROTOCOL = tcp)
 (host = xxxxxx.us.oracle.com) (Port = 1521)))
 (CONNECT_DATA = (SID = <sid_name> (GLOBAL_NAME = <sid_name>))))
```

```
dvols29_rms01user.world =
 (DESCRIPTION = (ADDRESS_LIST = (ADDRESS = (PROTOCOL = tcp)
 (host = xxxxxx.us.oracle.com) (Port = 1521)))
 (CONNECT_DATA = (SID = <sid_name> (GLOBAL_NAME = <sid_name>))))
```

Examples for a pluggable db:

```
dvols29_rms01user =
 (DESCRIPTION = (ADDRESS_LIST = (ADDRESS = (PROTOCOL = tcp)
 (host = xxxxxx.us.oracle.com) (Port = 1521)))
 (CONNECT_DATA = (SERVICE_NAME = <pluggable db name>)))
```

```
dvols29_rms01user.world =
 (DESCRIPTION = (ADDRESS_LIST = (ADDRESS = (PROTOCOL = tcp)
 (host = xxxxxx.us.oracle.com) (Port = 1521)))
 (CONNECT_DATA = (SERVICE_NAME = <pluggable db name>)))
```

---

**Note:** It is important to not just copy the tnsnames.ora file because it can quickly become out of date. The ifile clause (shown above) is key.

---

4. Create the wallet files. These are empty initially.
  - a. Ensure you are in the intended location.

```
$ pwd
/projects/rms14/dev/.wallet
```
  - b. Create the wallet files.

```
$ mkstore -wrl . -create
```
  - c. Enter the wallet password you want to use. It is recommended that you use the same password as the UNIX user you are creating the wallet on.
  - d. Enter the password again.

Two wallet files are created from the above command:

    - ewallet.p12
    - cwallet.sso
5. Create the wallet entry that associates the user name and password to the custom tns alias that was setup in the wallet's tnsnames.ora file.

```
mkstore -wrl . -createCredential <tns_alias> <username> <password>
```

---

**Example:**

```
mkstore -wrl . -createCredential dvols29_rms01user
rms01user passwd
```

---

6. Test the connectivity. The ORACLE\_HOME used with the wallet must be the same version or higher than what the wallet was created with.

```
$ export TNS_ADMIN=/projects/rms14/dev/.wallet /* This is very import to use
wallet to point at the alternate tnsnames.ora created in this example */

$ sqlplus /@dvols29_rms01user

SQL*Plus: Release 12

Connected to:
Oracle Database 12g

SQL> show user
USER is "rms01user"
```

Running batch programs or shell scripts would be similar:

```
Ex: dtesys /@dvols29_rms01user
script.sh /@dvols29_rms01user
```

Set the UP unix variable to help with some compiles :

```
export UP=/@dvols29_rms01user
for use in RMS batch compiles, and RMS, RWMs, and ARI forms compiles.
```

As shown in the example above, users can ensure that passwords remain invisible.

### Additional Database Wallet Commands

The following is a list of additional database wallet commands.

- Delete a credential on wallet

- ```
mkstore -wrl . -deleteCredential dvols29_rms01user
```
- Change the password for a credential on wallet


```
mkstore -wrl . -modifyCredential dvols29_rms01user rms01user passwd
```
 - List the wallet credential entries


```
mkstore -wrl . -list
```

This command returns values such as the following.

```
oracle.security.client.connect_string1
oracle.security.client.user1
oracle.security.client.password1
```
 - View the details of a wallet entry


```
mkstore -wrl . -viewEntry oracle.security.client.connect_string1
```

Returns the value of the entry:

```
dvols29_rms01user
```

```
mkstore -wrl . -viewEntry oracle.security.client.user1
```

Returns the value of the entry:

```
rms01user
```

```
mkstore -wrl . -viewEntry oracle.security.client.password1
```

Returns the value of the entry:

```
Passwd
```

Setting up RETL Wallets

RETL creates a wallet under \$RFX_HOME/etc/security, with the following files:

- cwallet.sso
- jazn-data.xml
- jps-config.xml
- README.txt

To set up RETL wallets, perform the following steps:

1. Set the following environment variables:
 - ORACLE_SID=<retaildb>
 - RFX_HOME=/u00/rfx/rfx-13
 - RFX_TMP=/u00/rfx/rfx-13/tmp
 - JAVA_HOME=/usr/jdk1.6.0_12.64bit
 - LD_LIBRARY_PATH=\$ORACLE_HOME
 - PATH=\$RFX_HOME/bin:\$JAVA_HOME/bin:\$PATH
2. Change directory to \$RFX_HOME/bin.
3. Run setup-security-credential.sh.
 - Enter 1 to add a new database credential.
 - Enter the dbuseralias. For example, ret1_java_rms01user.
 - Enter the database user name. For example, rms01user .
 - Enter the database password.
 - Re-enter the database password.
 - Enter D to exit the setup script.

4. Update your RETL environment variable script to reflect the names of both the Oracle Networking wallet and the Java wallet.
For example, to configure RETLforRPAS, modify the following entries in `$RETAIL_HOME/RETLforRPAS/rfx/etc/rmse_rpas_config.env`.
 - The RETL_WALLET_ALIAS should point to the Java wallet entry:
 - `export RETL_WALLET_ALIAS="retl_java_rms01user"`
 - The ORACLE_WALLET_ALIAS should point to the Oracle network wallet entry:
 - `export ORACLE_WALLET_ALIAS="dvo1s29_rms01user"`
 - The SQLPLUS_LOGON should use the ORACLE_WALLET_ALIAS:
 - `export SQLPLUS_LOGON="/@${ORACLE_WALLET_ALIAS}"`
5. To change a password later, run `setup-security-credential.sh`.
 - Enter 2 to update a database credential.
 - Select the credential to update.
 - Enter the database user to update or change.
 - Enter the password of the database user.
 - Re-enter the password.

For Java Applications (SIM, ReIM, RPM, RIB, AIP, Alloc, ReSA, RETL)

For Java applications, consider the following:

- For database user accounts, ensure that you set up the same alias names between the password stores (database wallet and Java wallet). You can provide the alias name during the installer process.
- Document all aliases that you have set up. During the application installation, you must enter the alias names for the application installer to connect to the database and application server.
- Passwords are not used to update entries in Java wallets. Entries in Java wallets are stored in partitions, or application-level keys. In each retail application that has been installed, the wallet is located in
`<WEBLOGIC_DOMAIN_HOME>/retail/<appname>/config` Example:
`/u00/webadmin/product/10.3.6/WLS/user_projects/domains/14_mck_soa_domain/retail/reim14/config`
- Application installers should create the Java wallets for you, but it is good to know how this works for future use and understanding.
- Scripts are located in `<WEBLOGIC_DOMAIN_HOME>/retail/<appname>/retail-public-security-api/bin` for administering wallet entries.
- Example:
 - `/u00/webadmin/product/10.3.6/WLS/user_projects/domains/REIMDomain/retail/reim14/retail-public-security-api/bin`
- In this directory is a script to help you update each alias entry without having to remember the wallet details. For example, if you set the RPM database alias to `rms01user`, you will find a script called `update-RMS01USER.sh`.

Note: These scripts are available only with applications installed by way of an installer.

- Two main scripts are related to this script in the folder for more generic wallet operations: `dump_credentials.sh` and `save_credential.sh`.

- If you have not installed the application yet, you can unzip the application zip file and view these scripts in <app>/application/retail-public-security-api/bin.
- Example:
- /u00/webadmin/reim14/application/retail-public-security-api/bin

update-<ALIAS>.sh

update-<ALIAS>.sh updates the wallet entry for this alias. You can use this script to change the user name and password for this alias. Because the application refers only to the alias, no changes are needed in application properties files.

Usage:

update-<username>.sh <myuser>

Example:

```
/u00/webadmin/product/10.3.x/WLS/user_projects/domains/RPMDomain/retail/rpm14/retail-public-security-api/bin> ./update-RMS01USER.sh
```

```
usage: update-RMS01USER.sh <username>
```

```
<username>: the username to update into this alias.
```

```
Example: update-RMS01USER.sh myuser
```

```
Note: this script will ask you for the password for the username that you pass in.
/u00/webadmin/product/10.3.x/WLS/user_projects/domains/RPMDomain/retail/rpm14/retail-public-security-api/bin>
```

dump_credentials.sh

dump_credentials.sh is used to retrieve information from wallet. For each entry found in the wallet, the wallet partition, the alias, and the user name are displayed. Note that the password is not displayed. If the value of an entry is uncertain, run save_credential.sh to resave the entry with a known password.

dump_credentials.sh <wallet location>

Example:

```
dump_credentials.sh
```

```
location:/u00/webadmin/product/10.3.x/WLS/user_projects/domains/REIMDomain/retail/reim14/config
```

Retail Public Security API Utility

Below are the credentials found in the wallet at the

```
location:/u00/webadmin/product/10.3.x/WLS/user_projects/domains/REIMDomain/retail/reim14/config
```

```
=====
Application level key partition name:reim14
User Name Alias:WLS-ALIAS User Name:weblogic
User Name Alias:RETAIL-ALIAS User Name:retail.user
User Name Alias:LDAP-ALIAS User Name:RETAIL.USER
User Name Alias:RMS-ALIAS User Name:rms14mock
User Name Alias:REIMBAT-ALIAS User Name:reimbat
```

save_credential.sh

save_credential.sh is used to update the information in wallet. If you are unsure about the information that is currently in the wallet, use dump_credentials.sh as indicated above.

save_credential.sh -a <alias> -u <user> -p <partition name> -l <path of the wallet file location where credentials are stored>

Example:

```
/u00/webadmin/mock14_testing/rtil/rtil/application/retail-public-security-api/bin>
save_credential.sh -l wallet_test -a myalias -p mypartition -u myuser
```

```
=====
Retail Public Security API Utility
=====
```

Enter password:

Verify password:

Note: -p in the above command is for partition name. You must specify the proper partition name used in application code for each Java application.

save_credential.sh and dump_credentials.sh scripts are the same for all applications. If using save_credential.sh to add a wallet entry or to update a wallet entry, bounce the application/managed server so that your changes are visible to the application. Also, save a backup copy of your cwallet.sso file in a location outside of the deployment path, because redeployment or reinstallation of the application will wipe the wallet entries you made after installation of the application. To restore your wallet entries after a redeployment/reinstallation, copy the backed up cwallet.sso file over the cwallet.sso file. Then bounce the application/managed server.

Usage

```
=====
Retail Public Security API Utility
=====
```

usage: save_credential.sh -au[plh]

E.g. save_credential.sh -a rms-alias -u rms_user -p rib-rms -l ./

-a, --userNameAlias <arg> alias for which the credentials
needs to be stored

-h, --help usage information

-l, --locationofWalletDir <arg> location where the wallet file is
created. If not specified, it creates the wallet under secure-credential-wallet
directory which is already present under the retail-public-security-api/
directory.

-p, --appLevelKeyPartitionName <arg> application level key partition name

-u, --userName <arg> username to be stored in secure

credential wallet for specified alias*

How does the Wallet Relate to the Application?

The ORACLE Retail Java applications have the wallet alias information you create in an <app-name>.properties file. Below is the reim.properties file. Note the database information and the user are presented as well. The property called datasource.credential.alias=RMS-ALIAS uses the ORACLE wallet with the argument of RMS-ALIAS at the csm.wallet.path and csm.wallet.partition.name = reim14 to retrieve the password for application use.

Reim.properties code sample:

```
datasource.url=jdbc:oracle:thin:@xxxxxxx.us.oracle.com:1521:pkols07
datasource.schema.owner=rms14mock
datasource.credential.alias=RMS-ALIAS
# =====
# ossa related Configuration
#
# These settings are for ossa configuration to store credentials.
# =====

csm.wallet.path=/u00/webadmin/product/10.3.x/WLS/user_projects/domains/REIMDomain/
retail/reim14/config
csm.wallet.partition.name=reim14
```

How does the Wallet Relate to Java Batch Program use?


Some of the ORACLE Retail Java batch applications have an alias to use when running Java batch programs. For example, alias REIMBAT-ALIAS maps through the wallet to dbuser RMS01APP, already on the database. To run a ReIM batch program the format would be: reimbatchpgmname REIMBAT-ALIAS <other arguments as needed by the program in question>

Database Credential Store Administration


The following section describes a domain level database credential store. This is used in RPM login processing, SIM login processing, RWMS login processing, RESA login processing and Allocation login processing and policy information for application permission. Setting up the database credential store is addressed in the RPM, SIM, RESA, RWMS, and Alloc 14.1 install guides.

The following sections show an example of how to administer the password stores thru ORACLE Enterprise Manager Fusion Middleware Control, a later section will show how to do this thru WLST scripts.

1. The first step is to use your link to Oracle Enterprise Manager Fusion Middleware Control for the domain in question. Locate your domain on the left side of the screen and do a right mouse click on the domain and select **Security > Credentials**

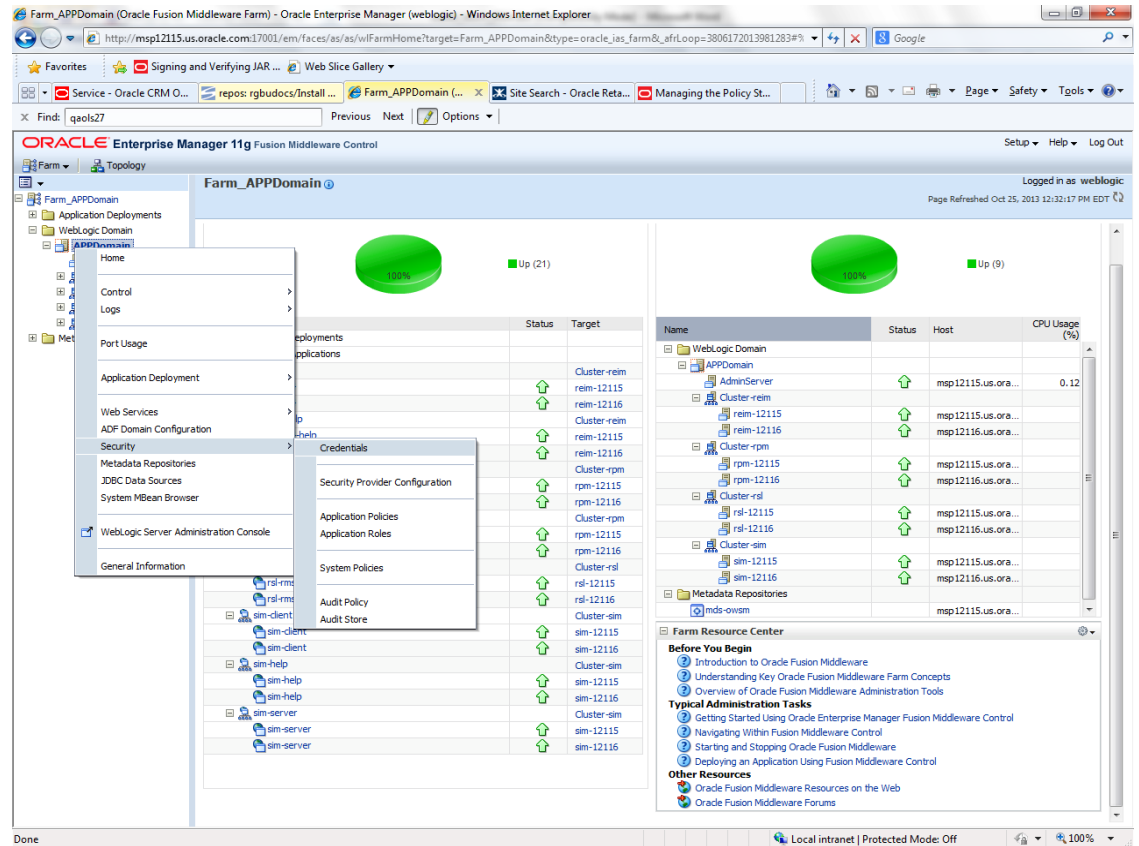


- Click on Credentials and you will get a screen similar to the following. The following screen is expanded to make it make more sense. From here you can administer credentials.

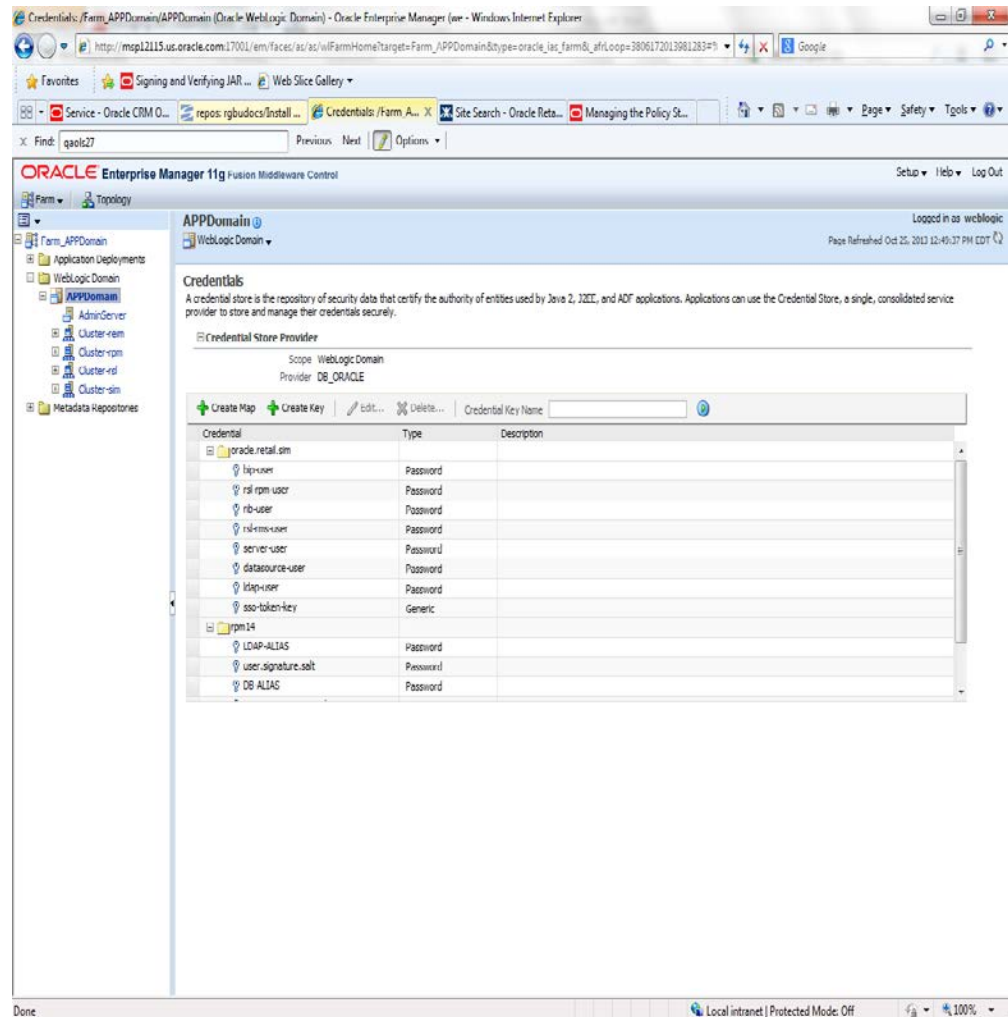

The Create Map add above is to create a new map with keys under it. A map would usually be an application such as rpm14. The keys will usually represent alias to various users (database user, WebLogic user, LDAP user, etc). The application installer should add the maps so you should not often have to add a map.

Creation of the main keys for an application will also be built by the application installer. You will not be adding keys often as the installer puts the keys out and the keys talk to the application. You may be using EDIT on a key to see what user the key/alias points to and possibly change/reset its password. To edit a key/alias, highlight the key/alias in question and push the edit icon nearer the top of the page. You will then get a screen as follows:

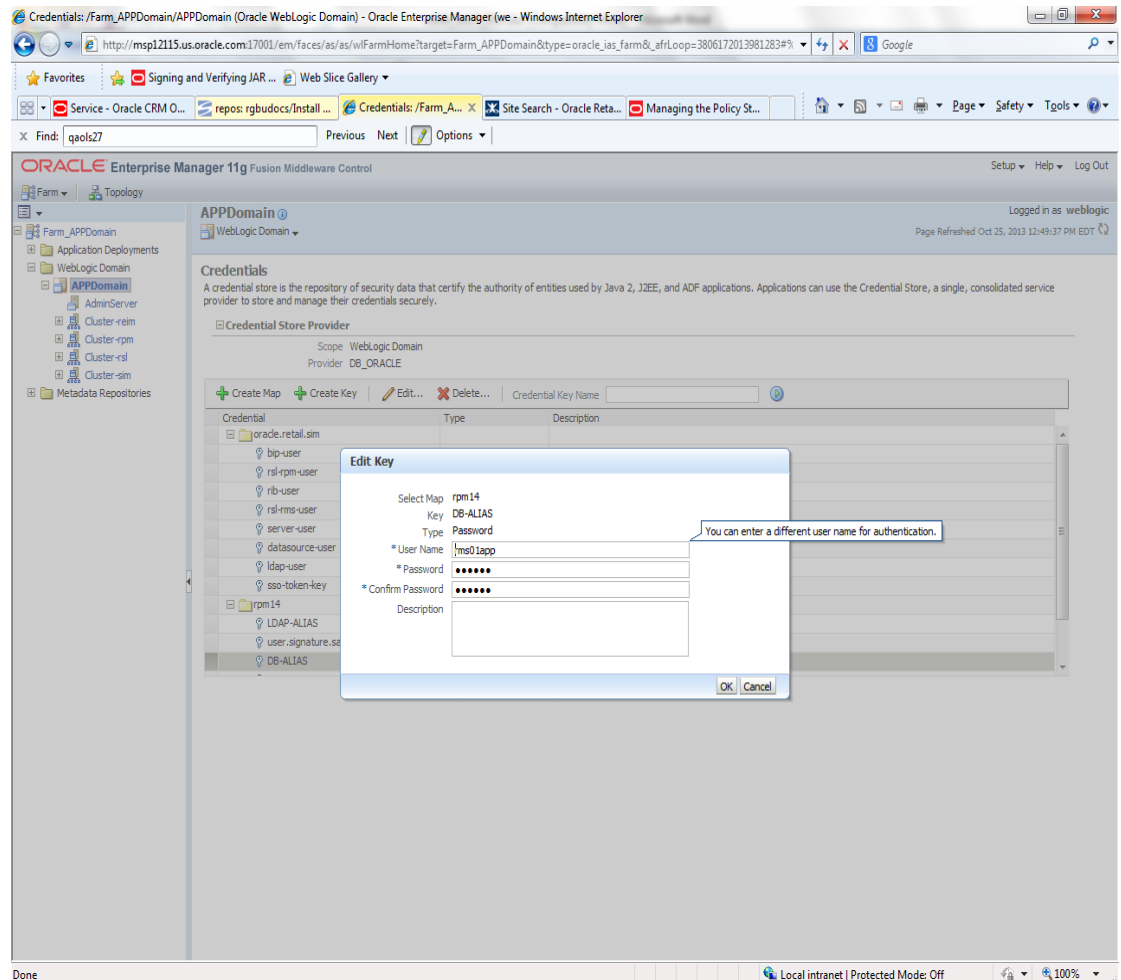

The screen above shows the map (rpm14) that came from the application installer, the key (DB-ALIAS) that came from the application installer (some of the keys/alias are selected by the person who did the application install, some are hard coded by the application installer in question), the type (in this case password), and the user name and password. This is where you would check to see that the user name is correct and reset the password if needed. REMEMBER, a change to an item like a database password WILL make you come into this and also change the password. Otherwise your application will NOT work correctly.

Managing Credentials with WSLT/OPSS Scripts

This procedure is optional as you can administer the credential store through the Oracle enterprise manager associated with the domain of your application install for RPM, SIM, RESA, or Allocation.

An Oracle Platform Security Scripts (OPSS) script is a WLST script, in the context of the Oracle WebLogic Server. An online script is a script that requires a connection to a running server. Unless otherwise stated, scripts listed in this section are online scripts and operate on a database credential store. There are a few scripts that are offline, that is, they do not require a server to be running to operate.

Read-only scripts can be performed only by users in the following WebLogic groups: Monitor, Operator, Configurator, or Admin. Read-write scripts can be performed only by users in the following WebLogic groups: Admin or Configurator. All WLST scripts are available out-of-the-box with the installation of the Oracle WebLogic Server.

WLST scripts can be run in interactive mode or in script mode. In interactive mode, you enter the script at a command-line prompt and view the response immediately after. In script mode, you write scripts in a text file (with a py file name extension) and run it without requiring input, much like the directives in a shell script.

For platform-specific requirements to run an OPSS script, see

http://docs.oracle.com/cd/E21764_01/core.1111/e10043/managepols.htm#CIHIBBDJ

The weakness with the WLST/OPSS scripts is that you have to already know your map name and key name. In many cases, you do not know or remember that. The database credential store way through enterprise manager is a better way to find your map and key names easily when you do not already know them. A way in a command line mode to find the map name and alias is to run orapki. An example of orapki is as follows:

```
/u00/webadmin/product/wls_apps/oracle_common/bin> ./orapki wallet display -
wallet
/u00/webadmin/product/wls_apps/user_projects/domains/APPDomain/config/fmw
config
```

(where the path above is the domain location of the wallet)

Output of orapki is below. This shows map name of rpm14 and each alias in the wallet:

Oracle PKI Tool: Version 11.1.1.7.0

Requested Certificates:

User Certificates:

Oracle Secret Store entries:

rpm14@#3#@DB-ALIAS

rpm14@#3#@LDAP-ALIAS

rpm14@#3#@RETAIL.USER

rpm14@#3#@user.signature.salt

rpm14@#3#@user.signature.secretkey

rpm14@#3#@WEBLOGIC-ALIAS

rpm14@#3#@WLS-ALIAS

Trusted Certificates:

Subject: OU=Class 1 Public Primary Certification Authority,O=VeriSign\, Inc.,C=US

OPSS provides the following scripts on all supported platforms to administer credentials (all scripts are online, unless otherwise stated. You need the map name and the key name to run the scripts below

- listCred
- updateCred
- createCred
- deleteCred
- modifyBootstrapCredential
- addBootstrapCredential

listCred

The script `listCred` returns the list of attribute values of a credential in the credential store with given map name and key name. This script lists the data encapsulated in credentials of type password only.

Script Mode Syntax

```
listCred.py -map mapName -key keyName
```

Interactive Mode Syntax

```
listCred(map="mapName", key="keyName")
```

The meanings of the arguments (all required) are as follows:

- `map` specifies a map name (folder).
- `key` specifies a key name.

Examples of Use:

The following invocation returns all the information (such as user name, password, and description) in the credential with map name `myMap` and key name `myKey`:

```
listCred.py -map myMap -key myKey
```

The following example shows how to run this command and similar credential commands with WLS:

```
/u000/webadmin/product/wls_apps/oracle_common/common/bin>  
sh wlst.sh
```

```
Initializing WebLogic Scripting Tool (WLS)...
```

```
Welcome to WebLogic Server Administration Scripting Shell
```

```
wls:/offline> connect('weblogic','password123','xxxxxx.us.oracle.com:17001')  
Connecting to t3://xxxxxx.us.oracle.com:17001 with userid weblogic ...  
Successfully connected to Admin Server 'AdminServer' that belongs to domain  
'APPDomain'.
```

```
wls:/APPDomain/serverConfig> listCred(map="rpm14",key="DB-ALIAS")  
Already in Domain Runtime Tree
```

```
[Name : rms01app, Description : null, expiry Date : null]  
PASSWORD:retail
```

```
*The above means for map rpm14 in APPDomain, alias DB-ALIAS points to database  
user rms01app with a password of retail
```

updateCred

The script `updateCred` modifies the type, user name, and password of a credential in the credential store with given map name and key name. This script updates the data encapsulated in credentials of type password only. Only the interactive mode is supported.

Interactive Mode Syntax

```
updateCred(map="mapName", key="keyName", user="userName", password="passw",
[desc="description"])
```

The meanings of the arguments (optional arguments are enclosed by square brackets) are as follows:

- `map` specifies a map name (folder) in the credential store.
- `key` specifies a key name.
- `user` specifies the credential user name.
- `password` specifies the credential password.
- `desc` specifies a string describing the credential.

Example of Use:

The following invocation updates the user name, password, and description of the password credential with map name `myMap` and key name `myKey`:

```
updateCred(map="myMap", key="myKey", user="myUsr", password="myPassw")
```

createCred

The script `createCred` creates a credential in the credential store with a given map name, key name, user name and password. This script can create a credential of type password only. Only the interactive mode is supported.

Interactive Mode Syntax

```
createCred(map="mapName", key="keyName", user="userName", password="passw",
[desc="description"])
```

The meanings of the arguments (optional arguments are enclosed by square brackets) are as follows:

- `map` specifies the map name (folder) of the credential.
- `key` specifies the key name of the credential.
- `user` specifies the credential user name.
- `password` specifies the credential password.
- `desc` specifies a string describing the credential.

Example of Use:

The following invocation creates a password credential with the specified data:

```
createCred(map="myMap", key="myKey", user="myUsr", password="myPassw")
```

deleteCred

The script `deleteCred` removes a credential with given map name and key name from the credential store.

Script Mode Syntax

```
deleteCred.py -map mapName -key keyName
```

Interactive Mode Syntax

```
deleteCred(map="mapName", key="keyName")
```

The meanings of the arguments (all required) are as follows:

- `map` specifies a map name (folder).
- `key` specifies a key name.

Example of Use:

The following invocation removes the credential with map name `myMap` and key name `myKey`:

```
deleteCred.py -map myMap -key myKey
```

modifyBootstrapCredential

The offline script `modifyBootstrapCredential` modifies the bootstrap credentials configured in the default `jps` context, and it is typically used in the following scenario: suppose that the policy and credential stores are LDAP-based, and the credentials to access the LDAP store (stored in the LDAP server) are changed. Then this script can be used to seed those changes into the bootstrap credential store.

This script is available in interactive mode only.

Interactive Mode Syntax

```
modifyBootstrapCredential(jpsConfigFile="pathName", username="usrName",  
password="usrPass")
```

The meanings of the arguments (all required) are as follows:

- `jpsConfigFile` specifies the location of the file `jps-config.xml` relative to the location where the script is run. Example location:
`/u00/webadmin/product/wls_apps/user_projects/domains/APPDomain/config/fmwconfig`. Example location of the bootstrap wallet is
`/u00/webadmin/product/wls_apps/user_projects/domains/APPDomain/config/fmwconfig/bootstrap`
- `username` specifies the distinguished name of the user in the LDAP store.
- `password` specifies the password of the user.

Example of Use:

Suppose that in the LDAP store, the password of the user with distinguished name `cn=orcladmin` has been changed to `welcome1`, and that the configuration file `jps-config.xml` is located in the current directory. Then the following invocation changes the password in the bootstrap credential store to `welcome1`:

```
modifyBootstrapCredential(jpsConfigFile='./jps-config.xml',  
username='cn=orcladmin', password='welcome1')
```

Any output regarding the audit service can be disregarded.

addBootStrapCredential

The offline script `addBootStrapCredential` adds a password credential with given map, key, user name, and user password to the bootstrap credentials configured in the default jps context of a jps configuration file.

Classloaders contain a hierarchy with parent classloaders and child classloaders. The relationship between parent and child classloaders is analogous to the object relationship of super classes and subclasses. The bootstrap classloader is the root of the Java classloader hierarchy. The Java virtual machine (JVM) creates the bootstrap classloader, which loads the Java development kit (JDK) internal classes and `java.*` packages included in the JVM. (For example, the bootstrap classloader loads `java.lang.String`.)

This script is available in interactive mode only.

Interactive Mode Syntax

```
addBootStrapCredential(jpsConfigFile="pathName", map="mapName", key="keyName",  
username="usrName", password="usrPass")
```

The meanings of the arguments (all required) are as follows:

- `jpsConfigFile` specifies the location of the file `jps-config.xml` relative to the location where the script is run. Example location:
`/u00/webadmin/product/wls_apps/user_projects/domains/APPDomain/config/fmwconfig`
- `map` specifies the map of the credential to add.
- `key` specifies the key of the credential to add.
- `username` specifies the name of the user in the credential to add.
- `password` specifies the password of the user in the credential to add.

Example of Use:

The following invocation adds a credential to the bootstrap credential store:

```
addBootStrapCredential(jpsConfigFile='./jps-config.xml', map='myMapName',  
key='myKeyName', username='myUser', password='myPass')
```


Quick Guide for Retail Password Stores (db wallet, java wallet, DB credential stores)

Retail app	Wallet type	Wallet loc	Wallet partition	Alias name	User name	Use	Create by	Alias Example	Notes
RMS batch	DB	<RMS batch install dir (RETAIL_HOME)>/.wallet	n/a	<Database SID>_<Data base schema owner>	<rms schema owner>	Compile, execution	Installer	n/a	Alias hard-coded by installer
RMS forms	DB	<forms install dir>/base/.wallet	n/a	<Database SID>_<Data base schema owner>	<rms schema owner>	Compile	Installer	n/a	Alias hard-coded by installer
ARI forms	DB	<forms install dir>/base/.wallet	n/a	<Db_Ari01>	<ari schema owner>	Compile	Manual	ari-alias	
RMWS forms	DB	<forms install dir>/base/.wallet	n/a	<Database SID>_<Data base schema owner>	<rwms schema owner>	Compile forms, execute batch	Installer	n/a	Alias hard-coded by installer
RPM batch plsql and sqlldr	DB	<RPM batch install dir>/.wallet	n/a	<rms schema owner alias>	<rms schema owner>	Execute batch	Manual	rms-alias	RPM plsql and sqlldr batches
RWMS auto-login	JAVA	<forms install dir>/base/.javawallet							
			<RWMS Installation name>	<RWMS database user alias>	<RWMS schema owner>	RWMS forms app to avoid dblogin screen	Installer	rwms14inst	
			<RWMS Installation name>	BI_ALIAS	<BI Publisher administrative user>	RWMS forms app to connect to BI Publisher	Installer	n/a	Alias hard-coded by installer

Retail app	Wallet type	Wallet loc	Wallet partition	Alias name	User name	Use	Create by	Alias Example	Notes
AIP app	JAVA	<weblogic domain home>/retail/<deployed aip app name>/config							Each alias must be unique
			aip14	<AIP weblogic user alias>	<AIP weblogic user name>	App use	Installer	aip-weblogic-alias	
			aip14	<AIP database schema user alias>	<AIP database schema user name>	App use	Installer	aip01user-alias	
			aip14	<rib-aip weblogic user alias>	<rib-aip weblogic user name>	App use	Installer	rib-aip-weblogic-alias	
RPM app	DB credential store		Map=rpml4 or what you called the app at install time.	Many for app use					<weblogic domain home>/config/fmwc onfig/jps-config.xml has info on the credential store. This directory also has the domain cwallet.sso file.
RPM app	JAVA	<weblogic domain home>/retail/<deployed rpm app name>/config							Each alias must be unique
			rpm14	<rpm weblogic user alias>	<rpm weblogic user name>	App use	Installer	rpm-weblogic-alias	

Retail app	Wallet type	Wallet loc	Wallet partition	Alias name	User name	Use	Create by	Alias Example	Notes
			rpm14	<rpm batch user name> is the alias. Yes, here alias name = user name	<rpm batch user name>	App, batch use	Installer	RETAIL.USER	
	JAVA	<retail_home>/orpatch/config/javaapp_rpm							Each alias must be unique
			retail_installer	<rpm weblogic user alias>	<rpm weblogic user name>	App use	Installer	weblogic-alias	
			retail_installer	<rms shema user alias>	<rms shema user name>	App, batch use	Installer	rms01user-alias	
			retail_installer	<reim batch user alias>	<reim batch user name>	App, batch use	Installer	reimbat-alias	
			retail_installer	<LDAP-ALIAS>	cn=rpm.admin,cn=Users,dc=us,dc=oracle,dc=com	LDAP user use	Installer	LDAP_ALIAS	
ReIM app	JAVA	<weblogic domain home>/retail/<deployed reim app name>/config							Each alias must be unique
			<installed app name, ex: reim14>	<reim weblogic user alias>	<reim weblogic user name>	App use	Installer	weblogic-alias	
			<installed app name, ex: reim14>	<rms shema user alias>	<rms shema user name>	App, batch use	Installer	rms01user-alias	

Retail app	Wallet type	Wallet loc	Wallet partition	Alias name	User name	Use	Create by	Alias Example	Notes
			<installed app name, ex: reim14>	<reim webservice validation user alias>	<reim webservice validation user name>	App use	Installer	reimwebser vice-alias	
			<installed app name, ex: reim14>	<reim batch user alias>	<reim batch user name>	App, batch use	Installer	reimbat-alias	
			<installed app name, ex: reim14>	<LDAP-ALIAS>	cn=REIM.ADMIN,cn=Users,dc=us,dc=oracle,dc=com	LDAP user use	Installer	LDAP_ALIAS	
	JAVA	<retail_home>/orpatch/conf/javaapp_reim							Each alias must be unique
			retail_installer	<reim weblogic user alias>	<reim weblogic user name>	App use	Installer	weblogic-alias	
			retail_installer	<rms shema user alias>	<rms shema user name>	App, batch use	Installer	rms01user-alias	
			retail_installer	<reim webservice validation user alias>	<reim webservice validation user name>	App use	Installer	reimwebser vice-alias	
			retail_installer	<reim batch user alias>	<reim batch user name>	App, batch use	Installer	reimbat-alias	
			retail_installer	<LDAP-ALIAS>	cn=REIM.ADMIN,cn=Users,dc=us,dc=oracle,dc=com	LDAP user use	Installer	LDAP_ALIAS	

Retail app	Wallet type	Wallet loc	Wallet partition	Alias name	User name	Use	Create by	Alias Example	Notes
RESA app	DB credential store		Map=resa14 or what you called the app at install time	Many for login and policies					<weblogic domain home>/config/fmwc onfig/jps-config.xml has info on the credential store. This directory also has the domain cwallet.sso file. The bootstrap directory under this directory has bootstrap cwallet.sso file.
RESA app	JAVA	<weblogic domain home>/retail/<deployed resa app name>/config							Each alias must be unique
			<installed app name>	<resa weblogic user alias>	<resa weblogic user name>	App use	Installer	wlsalias	
			<installed app name>	<resa schema db user alias>	<rmsdb shema user name>	App use	Installer	Resadb-alias	
			<installed app name>	<resa schema user alias>	<rmsdb shema user name>>	App use	Installer	resa-alias	
	JAVA	<retail_home>/orpatch/config/javaapp_resa							Each alias must be unique

Retail app	Wallet type	Wallet loc	Wallet partition	Alias name	User name	Use	Create by	Alias Example	Notes
			retail_installer	<resa weblogic user alias>	<resa weblogic user name>	App use	Installer	wlsalias	
			retail_installer	<resa schema db user alias>	<rmsdb shema user name>	App use	Installer	Resadb-alias	
	JAVA	<retail_ home>/orpatch/config/javaapp_rasrm							Each alias must be unique
			retail_installer	<alloc weblogic user alias>	<alloc weblogic user name>	App use	Installer	weblogic-alias	
Alloc app	DB credential store		Map=alloc 14 or what you called the app at install time	Many for login and policies					<weblogic domain home>/config/fmwc onfig/jps-config.xml has info on the credential store. This directory also has the domain cwallet.sso file. The bootstrap directory under this directory has bootstrap cwallet.sso file.
Alloc app	JAVA	<weblogic domain home>/retail/config							Each alias must be unique

Retail app	Wallet type	Wallet loc	Wallet partition	Alias name	User name	Use	Create by	Alias Example	Notes
			<installed app name>	<alloc weblogic user alias>	<alloc weblogic user name>	App use	Installer	weblogic-alias	
			<installed app name>	<rms schema user alias>	<rms schema user name>	App use	Installer	dsallocAlias	
			<installed app name>	<alloc batch user alias>	<SYSTEM_ADMINISTRATOR>	Batch use	Installer	alloc14	
	JAVA	<retail_home>/orpatch/config/javaapp_alloc							Each alias must be unique
			retail_installer	<alloc weblogic user alias>	<alloc weblogic user name>	App use	Installer	weblogic-alias	
			retail_installer	<rms schema user alias>	<rms schema user name>	App use	Installer	dsallocAlias	
			retail_installer	<alloc batch user alias>	<SYSTEM_ADMINISTRATOR>	Batch use	Installer	alloc14	
	JAVA	<retail_home>/orpatch/config/javaapp_rasm							Each alias must be unique
			retail_installer	<alloc weblogic user alias>	<alloc weblogic user name>	App use	Installer	weblogic-alias	

Retail app	Wallet type	Wallet loc	Wallet partition	Alias name	User name	Use	Create by	Alias Example	Notes
SIM app	DB credential store		Map=oracle.retail.sim	Aliases required for SIM app use					<weblogic domain home>/config/fmwconfig/jps-config.xml has info on the credential store. This directory also has the domain cwallet.sso file.
	JAVA	<weblogic domain home>/retail/<deployed sim app name>/batch/resources/conf	oracle.retail.sim	<sim batch user alias>	<sim batch user name>	App use	Installer	BATCH-ALIAS	
	JAVA	<weblogic domain home>/retail/<deployed sim app name>/wireless/resources/conf	oracle.retail.sim	<sim wireless user alias>	<sim wireless user name>	App use	Installer	WIRELESS-ALIAS	
RETL	JAVA	<RETL home>/etc/security	n/a	<target application user alias>	<target application db userid>	App use	Manual	retl_java_rms01user	User may vary depending on RETL flow's target application
RETL	DB	<RETL home>/wallet	n/a	<target application user alias>	<target application db userid>	App use	Manual	<db>_<user>	User may vary depending on RETL flow's target application
RIB	JAVA	<RIBHOME DIR>/deployment-home/conf/security							<app> is one of aip, rfm, rms, rpm, sim, rwms, tafr
JMS			jms<1-5>	<jms user alias> for jms<1-5>	<jms user name> for jms<1-5>	Integration use	Installer	jms-alias	

Retail app	Wallet type	Wallet loc	Wallet partition	Alias name	User name	Use	Create by	Alias Example	Notes
WebLogic			rib-<app>-app-server-instance	<rib-app weblogic user alias>	<rib-app weblogic user name>	Integration use	Installer	weblogic-alias	
Admin GUI			rib-<app>#web-app-user-alias	<rib-app admin gui user alias>	<rib-app admin gui user name>	Integration use	Installer	admin-gui-alias	
Application			rib-<app>#user-alias	<app weblogic user alias>	<app weblogic user name>	Integration use	Installer	app-user-alias	Valid only for aip, rpm, sim
DB			rib-<app>#app-db-user-alias	<rib-app database schema user alias>	<rib-app database schema user name>	Integration use	Installer	db-user-alias	Valid only for rfm, rms, rwms, tafr
Error Hospital			rib-<app>#hosp-user-alias	<rib-app error hospital database schema user alias>	<rib-app error hospital database schema user name>	Integration use	Installer	hosp-user-alias	
RFI	Java	<RFI-HOME>/retail-financial-integration-solution/service-based-integration/conf/security							
			<installed app name>	rfiAppServerAdminServerUserAlias	<rfi weblogic user name>	App use	Installer	rfiAppServerAdminServerUserAlias	
			<installed app name>	rfiAdminUiUserAlias	<ORFI admin user>	App use	Installer	rfiAdminUiUserAlias	
			<installed app name>	rfiDataSourceUserAlias	<ORFI schema user name>	App use	Installer	rfiDataSourceUserAlias	

Retail app	Wallet type	Wallet loc	Wallet partition	Alias name	User name	Use	Create by	Alias Example	Notes
			<installed app name>	ebsDataSourceUserAlias	<EBS schema user name>	App use	Installer	ebsDataSourceUserAlias	
			<installed app name>	smtpMailFromAddressAlias	<From email address>	App use	Installer	smtpMailFromAddressAlias	

Appendix: Installation Order

This section provides a guideline as to the order in which the Oracle Retail applications should be installed. If a retailer has chosen to use some, but not all, of the applications the order is still valid less the applications not being installed.

Note: The installation order is not meant to imply integration between products.

Enterprise Installation Order

1. Oracle Retail Merchandising System (RMS), Oracle Retail Trade Management (RTM)
2. Oracle Retail Sales Audit (ReSA)
3. Oracle Retail Extract, Transform, Load (RETL)
4. Oracle Retail Active Retail Intelligence (ARI)
5. Oracle Retail Warehouse Management System (RWMS)
6. Oracle Retail Invoice Matching (ReIM)
7. Oracle Retail Price Management (RPM)

Note: During installation of RPM, you are asked for the RIBforRPM provider URL. Because RIB is installed after RPM, make a note of the URL you enter. To change the RIBforRPM provider URL after you install RIB, edit the `remote_service_locator_info_ribserver.xml` file.

8. Oracle Retail Allocation
9. Oracle Retail Central Office (ORCO)
10. Oracle Retail Returns Management (ORRM)
11. Oracle Retail Back Office (ORBO)
12. Oracle Retail Store Inventory Management (SIM)

Note: During installation of SIM, you are asked for the RIB provider URL. Because RIB is installed after SIM, make a note of the URL you enter. To change the RIB provider URL after you install RIB, edit the `remote_service_locator_info_ribserver.xml` file.

13. Oracle Retail Predictive Application Server (RPAS)
14. Oracle Retail Demand Forecasting (RDF)
15. Oracle Retail Category Management (RCM)
16. Oracle Retail Replenishment Optimization (RO)
17. Oracle Retail Analytic Parameter Calculator Replenishment Optimization (APC RO)
18. Oracle Retail Regular Price Optimization (RPO)
19. Oracle Retail Merchandise Financial Planning (MFP)
20. Oracle Retail Size Profile Optimization (SPO)
21. Oracle Retail Assortment Planning (AP)

-
22. Oracle Retail Item Planning (IP)
 23. Oracle Retail Item Planning Configured for COE (IP COE)
 24. Oracle Retail Advanced Inventory Planning (AIP)
 25. Oracle Retail Analytics
 26. Oracle Retail Advanced Science Engine (ORASE)
 27. Oracle Retail Integration Bus (RIB)
 28. Oracle Retail Service Backbone (RSB)
 29. Oracle Retail Financial Integration (ORFI)
 30. Oracle Retail Point-of-Service (ORPOS)
 - Oracle Retail Mobile Point-of-Service (ORMPOS) (requires ORPOS)
 31. Oracle Retail Markdown Optimization (MDO)
 32. Oracle Retail Clearance Optimization Engine (COE)
 33. Oracle Retail Analytic Parameter Calculator for Markdown Optimization (APC-MDO)
 34. Oracle Retail Analytic Parameter Calculator for Regular Price Optimization (APC-RPO)
 35. Oracle Retail Macro Space Planning (MSP)

The Oracle Retail Enterprise suite includes Macro Space Planning. This can be installed independently of and does not affect the installation order of the other applications in the suite. If Macro Space Planning is installed, the installation order for its component parts is:

 - Oracle Retail Macro Space Management (MSM)
 - Oracle Retail In-Store Space Collaboration (ISSC) (requires MSM)
 - Oracle Retail Mobile In-Store Space Collaboration (requires MSM and ISSC)