

**Oracle® Communications
Diameter Signaling Router**

DSR Security App Using Mediation Example Procedure
E87267-01

April 2017

ORACLE®

Copyright © 2017 Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.



CAUTION: Use only the Upgrade procedure included in the Upgrade Kit.

Before upgrading any system, please access My Oracle Support (MOS) (<https://support.oracle.com>) and review any Technical Service Bulletins (TSBs) that relate to this upgrade.

My Oracle Support (MOS) (<https://support.oracle.com>) is your initial point of contact for all product support and training needs. A representative at Customer Access Support (CAS) can assist you with MOS registration.

Call the CAS main number at 1-800-223-1711 (toll-free in the US), or call the Oracle Support hotline for your local country from the list at <http://www.oracle.com/us/support/contact/index.html>.

See more information on MOS in the Appendix section.

Disclaimer: This is just a reference to an example for creating security application using DSR Mediation functionality.

Table of Contents

1. Introduction	5
1.1 Purpose and Scope	5
1.2 Overview of Security Application	5
2. Example Procedure.....	6
2.1 Define Internal Variables	6
2.2 Define Measurements.....	7
2.3 Add AVP to DSR Custom Dictionary.....	7
2.3.1 OC-Supported-Features AVP.....	7
2.3.2 OC-OLR AVP.....	8
2.3.3 DRMP AVP	8
2.4 Ruleset Configuration	8
2.4.1 Template 1: Roaming Scenario Identification	9
2.4.2 Template 2: Application ID and CC WhiteList for Inbound Roamers.....	10
2.4.3 Template 3: Application ID and CC Whitelist for Outbound Roamers	12
2.4.4 Template 4: OR Whitelist	14
2.4.5 Template 5: DR Whitelist.....	16
2.4.6 Template 6: OH Ends with OR	18
2.4.7 Template 7: Handle Route Record AVP	20
2.4.8 Template 8: Handle Disallowed Requests.....	22
2.4.9 Template 9a: Remove DOIC AVP	23
2.4.10 Template 9b: Remove DRMP AVP	25
2.4.11 Template 10: Roaming Scenario Identification	26
2.4.12 Template 11: Destination-Realm Whitelist.....	28
2.4.13 Template 12a: Remove DOIC AVP	30
2.4.14 Template 12b: Remove DRMP AVP	32
2.5 Insert Rules within a Rule Set.....	32
2.6 State and Properties of Ruleset	36
2.7 Association of Ruleset to a Trigger Point	38

List of Tables

Table 1: Internal Variables	6
Table 2: Measurements	7
Table 3: Mediation Templates.....	8
Table 4: Sample IMSIs.....	9

List of Figures

Figure 1: Define Internal Variables	6
Figure 2: Screenshot of Measurements.....	7
Figure 3: Screenshot of DRMP AVP	8
Figure 4: Screenshot of Roaming Scenario Identification Template.....	10
Figure 5: Screenshot of Application ID and CC Whitelist for Inbound Roamers Configured Template	11
Figure 6: Screenshot of Application ID and CC Whitelist for Outbound Roamers Configured Template..	13
Figure 7: Screenshot of OR Whitelist Configured Template.....	15
Figure 8: Screenshot of DR Whitelist Configured Template	17
Figure 9: Screenshot of OH Ends with OR Configured Template	19
Figure 10: Screenshot of Handle Route Record AVP Configured Template.....	21
Figure 11: Screenshot of Handle Disallowed Requests Configured Template.....	22
Figure 12: Screenshot of Remove DOIC AVP Configured Template	24
Figure 13: Screenshot of Remove DRMP AVP Configured Template	25
Figure 14: Screenshot of Roaming Scenario Identification Configured Template.....	27
Figure 15: Screenshot of Destination-Realm Whitelist Configured Template	29
Figure 16: Screenshot of Remove DOIC AVP Configured Template	31
Figure 17: Screenshot of Configured Template	32
Figure 18: Template 1: Roaming Scenario Identification.....	33
Figure 19: Template 2: Application ID and CC Whitelist for Inbound Roamers.....	33
Figure 20: Template 3: Application ID and CC Whitelist for Outbound Roamers.....	33
Figure 21: Template 4: OR Whitelist.....	34
Figure 22: Template 5: DR Whitelist	34
Figure 23: Template 6: OH Ends with OR	34
Figure 24: Template 7: Handle RouteRecord AVP	34
Figure 25: Template 8: Handle Disallowed Requests.....	35
Figure 26: Template 9a: Remove DOIC AVP	35
Figure 27: Template 9b: Remove DRMP AVP	35
Figure 28: Template 10. Roaming Scenario Identification.....	35
Figure 29: Template 11. Destination-Realm Whitelist	36
Figure 30: Template 12a. Remove DOIC AVP	36
Figure 31: Template 12b. Remove DRMP AVP	36
Figure 32: Active Templates Used as Reference	37
Figure 33: Screenshot of Rule Set Attached to its Trigger Points	38

1. Introduction

1.1 Purpose and Scope

This document provides a sample procedure required to build a security application using mediation.

No additional software installation is required before executing this procedure. The standard DSR installation procedure loads all required software. You do need to activate the Mediation feature before implementing the security application.

1.2 Overview of Security Application

- Most of the Diameter security vulnerabilities are for interconnect from roaming networks through IPX or directly from roaming partner networks.
- DEA is considered as the only point of contact into and out of an operator's network at the Diameter application level.
- Attacks are induced in operator's home network through Diameter messages passing through DEA.
- Security threats currently being discussed for SS7 are around below mentioned attacks:
 - Location tracking
 - Call intercept
 - Subscriber Denial of Service
 - Subscriber Account fraud
 - SMS SPAMS
- DSR based Diameter Security Countermeasures can be used to mitigate different diameter attacks.
- Diameter security countermeasures shall be implemented using ART or Mediation rules based screening.
- In this user guide, we use Mediation to configure and implement Diameter security countermeasures (Security Application).
- Diameter Security Countermeasures shall be applied on:
 - Ingress messages received from the peers of external foreign network
 - Egress messages sent from home network to external foreign network.
- For the purposes of applying countermeasures, subscribers are classified into one of following three types:
 - Inbound roaming subscribers: Security countermeasures are applicable for visited network subscribers roaming in home network
 - Outbound roaming subscribers: Security countermeasures are applicable for home network subscribers roaming in visited network
 - Non-Roaming home network subscribers: Security countermeasures are applicable for home network subscribers who are not roaming outside home network

2. Example Procedure

This section lists the steps followed to build the sample security application using mediation. The security application uses various countermeasure checks. User may vary the templates (add/delete/modify) as per their needs.

Test Setup topology: DSR Setup with 1 NO + 1 SO + 1 MP. In the example (sample testing), DSR 80.14.1 is used with 1 NO + 1 SO + 1 MP, and taken as reference in this user guide.

2.1 Define Internal Variables

The internal variable provides inputs (i.e, Peer Type, Roamer Type, etc.) to templates, which implements countermeasures, generates alarms, and drops the vulnerable message.

To configure Internal Variables:

1. Launch an active SO GUI.
2. Navigate to **Main Menu -> Diameter -> Mediation -> Internal Variables Screen**.
3. Click **Insert** to insert each internal variable individually.
4. Define the following internal variables. The templates set and read these internal variables.

Table 1: Internal Variables

Name	Description	Type	Default Value
\$msgDisallowed	If true, then message is not allowed further; false then message is allowed and it is still tracked by other templates.	Integer32	0
\$foreignIngressPeer	If true, then message is from foreign network to home network.	Integer32	0
\$foreignEgressPeer	If true, then message is from home network to foreign network.	Integer32	0
\$inboundRoaming	If true, then subscriber is inbound subscriber.	Integer32	0
\$outboundRoaming	If true, then subscriber is outbound subscriber.	Integer32	0
\$index	Used as an index to delete the multiple occurrence of an AVP in one shot	Integer32	0

Main Menu: Diameter -> Mediation -> Internal Variables

Filter* ▾

Table Description: Internal Variables Table

Variable Name	Type	Default Value	Description
foreignEgressPeer	Integer32	0	It determines whether peer is foreign peer or not for egress message.
foreignIngressPeer	Integer32	0	It determines whether peer is foreign peer or not.
inboundRoaming	Integer32	0	If non-zero, it decides the message is from inbound roaming subscriber.
index	Integer32	0	Use as an index to delete the multiple occurrence of an AVP in one shot.
msgDisallowed	Integer32	0	If non-zero then message will not be allowed.
outboundRoaming	Integer32	0	If non-zero, it decides the message is from outbound roaming subscriber.

Figure 1: Define Internal Variables

2.2 Define Measurements

Measurements calculate the number of vulnerable messages dropped by the Security application. For each type of countermeasure, create an entry.

To configure Measurements,

1. Launch an active SO GUI.
2. Navigate to **Main Menu -> Diameter -> Mediation -> Measurements**.
3. Click **Insert** to insert each measurement individually.

Use the following measurements for this example.

Table 2: Measurements

Measurement Name	Description
measurement_inbound_10	Application ID and CC whitelist for inbound roammers
measurement_outbound_20	Application ID and CC whitelist for outbound roammers
measurement_DRWhitelist_40	DR whitelist
measurement_DestRealm_ER_100	Destination Realm Egress Request
measurement_Handle_RRecordAVP_60	Handle Route Record AVP
measurement_OH_ends_with_OR_50	OH ends with OR
measurement_ORWhitelist_30	OR whitelist

Main Menu: Diameter -> Mediation -> Measurements

Filter* ▾

Fri Jan 06 10:19:46

Table Description: Measurements Table

Measurement Name	Description
measurement_DestRealm_ER_100	Destination Realm Egress Request
measurement_DRWhitelist_40	DR whitelist
measurement_Handle_RRecordAVP_60	Handle Route Record AVP
measurement_inbound_10	Application Id and CC white list for inbound roammers
measurement_OH_ends_with_OR_50	OH ends with OR
measurement_ORWhitelist_30	OR whitelist
measurement_outbound_20	Application Id and CC white list for outbound roammers

Figure 2: Screenshot of Measurements

2.3 Add AVP to DSR Custom Dictionary

Add the following AVPs to the DSR custom dictionary:

2.3.1 OC-Supported-Features AVP

OC-Supported-Features ::= < AVP Header: 621 >

[OC-Feature-Vector]
* [AVP]


2.3.2 OC-OLR AVP

```
OC-OLR ::= < AVP Header: 623 >
           < OC-Sequence-Number >
           < OC-Report-Type >
           [ OC-Reduction-Percentage ]
           [ OC-Validity-Duration ]
           * [ AVP ]
```

2.3.3 DRMP AVP

The DRMP (AVP code 301) is an Enumerated type.

Main Menu: Diameter -> AVP Dictionary -> Custom Dictionary

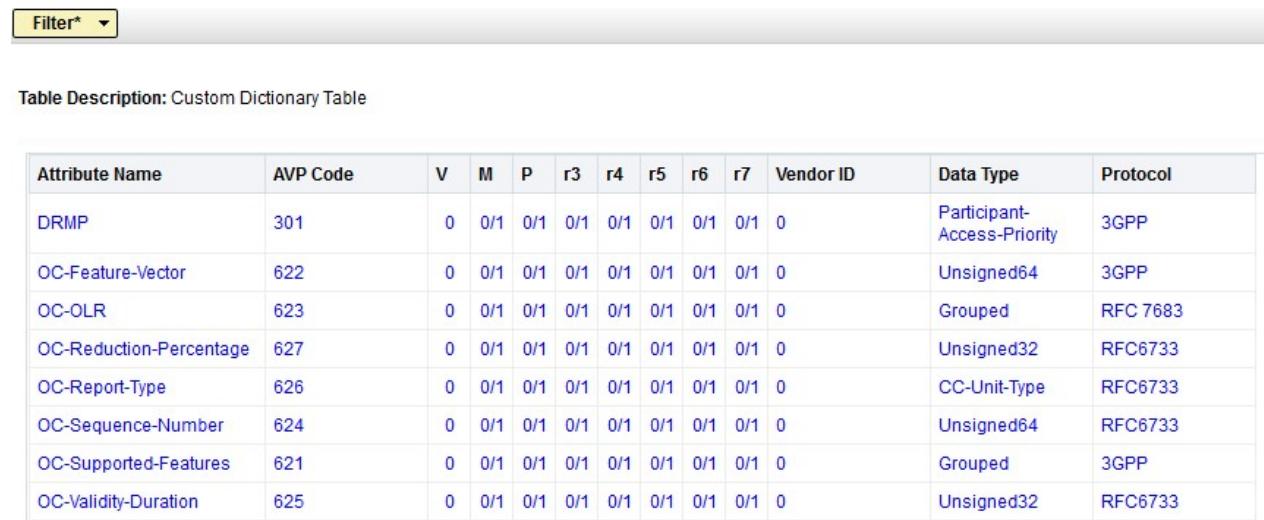

Attribute Name	AVP Code	V	M	P	r3	r4	r5	r6	r7	Vendor ID	Data Type	Protocol
DRMP	301	0	0/1	0/1	0/1	0/1	0/1	0/1	0/1	0	Participant-Access-Priority	3GPP
OC-Feature-Vector	622	0	0/1	0/1	0/1	0/1	0/1	0/1	0/1	0	Unsigned64	3GPP
OC-OLR	623	0	0/1	0/1	0/1	0/1	0/1	0/1	0/1	0	Grouped	RFC 7683
OC-Reduction-Percentage	627	0	0/1	0/1	0/1	0/1	0/1	0/1	0/1	0	Unsigned32	RFC6733
OC-Report-Type	626	0	0/1	0/1	0/1	0/1	0/1	0/1	0/1	0	CC-Unit-Type	RFC6733
OC-Sequence-Number	624	0	0/1	0/1	0/1	0/1	0/1	0/1	0/1	0	Unsigned64	RFC6733
OC-Supported-Features	621	0	0/1	0/1	0/1	0/1	0/1	0/1	0/1	0	Grouped	3GPP
OC-Validity-Duration	625	0	0/1	0/1	0/1	0/1	0/1	0/1	0/1	0	Unsigned32	RFC6733

Figure 3: Screenshot of DRMP AVP

2.4 Ruleset Configuration

To implement all six counter measures, configure the 14 Mediation templates. A few of these templates are common (i.e., not related to any specific counter measure), which performs generic actions like computing Peer Type/Roamer Type, generating alarms, pegging corresponding counters, and dropping the vulnerable messages. The remaining templates implement the counter measure specific business logic.

Refer to Table 1 to see counter measures to template mapping.

Table 3: Mediation Templates

Counter Measure Name	Used Template
Application-ID Whitelist Screening	Template 2 & 3
Application-ID and Command Code Consistency Check	Template 2 & 3
Origin Realm and Destination Realm Whitelist Screening	Template 4, 5 & 11
Origin host and Origin Realm Consistency Check	Template 6
Route-Record Validation	Template 7
Removal of Blacklisted AVPs	Template 9a, 9b, 12a & 12b

2.4.1 Template 1: Roaming Scenario Identification

This template computes Peer Type [Foreign or Home Peer], Roamer Type [Inbound or Outbound roamer], which is used by remaining templates.

It is associated with trigger point RTP1.

Template Definition

If @dsr.ingress.peer equals list of foreign peers

Then

Set Internal Variable: \$foreignIngressPeer = 1

Set Internal Variable \$outboundRoaming = (@msg.avp["User-Name"][[1].imsi.mccmnc == <LOCAL MCCMNC>)

Set Internal Variable: \$inboundRoaming = !\$outboundRoaming

This template sets internal variables if ingress peer is listed in a foreign peer list.


If the peer is in the whitelist then, check IMSI (International Mobile Subscriber Identity) from User-Name AVP to find out the home network of this user.

If the MCCMNC (extracted from IMSI) is equal to the local MCCMNC, then this subscriber is an **outbound** roaming subscriber.

If the MCCMNC (extracted from IMSI) is not equal to the local MCCMNC, then this subscriber is an **inbound** roaming subscriber.

How to Extract MCC and MNC from IMSI Stored in USIM

The value of MNC (two or three digits) depends on the value of MCC.

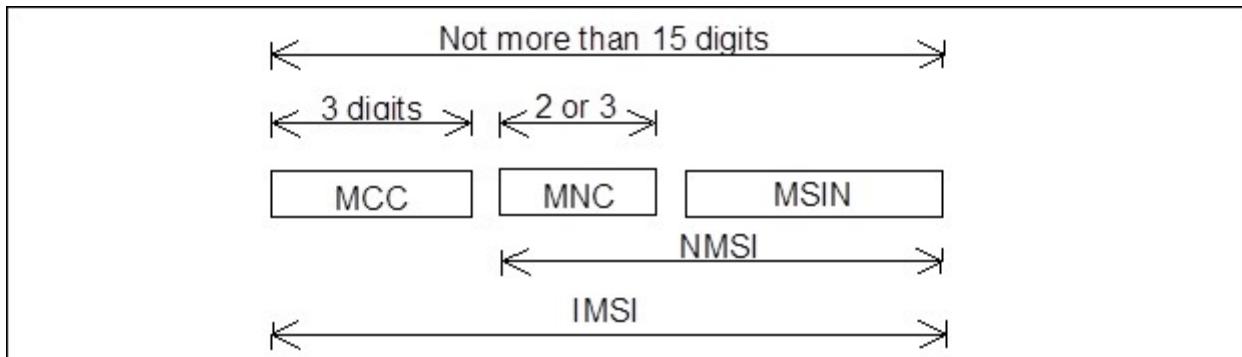

In our sample testing, we used the following IMSIs:

Table 4: Sample IMSIs

MCC	MNC	Country	IMSI	Network
404	17	India	404179712345678	Home Network Subscriber
460	02	China	460022112345678	Foreign Network Subscriber

These IMSIs have been used for outbound and inbound subscriber in our sample testing and can be used as a reference.

Main Menu: Diameter -> Mediation -> Rule Templates [Edit]

Ok Apply Cancel

Settings		Description	
Rule Template Name	Roaming scenario identification-RTP1	Name used to label this Rule Template in the system [Default = n/a, Range = A 255 character string. Valid characters are [a-z], [A-Z], [0-9], space, dash (-), period (.), @, and underscore (_).]	
Message type support	Request <input checked="" type="checkbox"/> Answer <input checked="" type="checkbox"/>	Indicates what type of message processing is supported by the Rule Template, i.e. Request, Answer, or both. The message type support depends on the selected conditions and actions.	
Conditions		Description	
Fast search	<input checked="" type="checkbox"/> A		
Name	Identifying the Ingress peer	When the condition set matches on the message, the selected actions are applied in the order they are shown. Each condition consists of a <left-hand operand>-<operator>-<right-hand operand> triple where <right-hand operand> is either a value provisioned by the Rule Set Administrator or a fixed value that comes for example from the message being processed. In the former case, "name" is shown on the provisioning screen instead of <left-hand operand> and the value is pre-filled by the "default value". "Optional" makes the condition optional, and "Fast search" results in fast database lookups.	
Description	Check Peer for Roaming scenario identification	[wizard]	
Left value	@dsr.ingress.peer	[wizard]	
Operator	<input type="radio"/> == <input type="radio"/> Case sensitive <input type="checkbox"/>	[wizard]	
Right value	Peer	[wizard]	
Default value	FN_MME1	[wizard]	
[Add]		Optional <input type="checkbox"/> Fixed <input type="checkbox"/>	
Condition Set	<input type="radio"/> ANDed <input type="radio"/> ORed <input checked="" type="radio"/> Complex Expression	A	
Actions		Description	
Action	Default Values	Optional	
Set internal variable	Internal variable foreignIngressPeer SetValue [wizard]	<input type="checkbox"/>	When the condition set matches on the message, the selected actions are applied in the order they are shown. Each condition consists of a <left-hand operand>-<operator>-<right-hand operand> triple where <right-hand operand> is either a value provisioned by the Rule Set Administrator or a fixed value that comes for example from the message being processed. In the former case, "name" is shown on the provisioning screen instead of <left-hand operand> and the value is pre-filled by the "default value". "Optional" makes the condition optional, and "Fast search" results in fast database lookups.
Set internal variable	Internal variable outboundRoaming SetValue [@msg.avp["User-Name"] [wizard]]	<input type="checkbox"/>	The action allows setting the value for an internal variable that is valid for the entire duration of a transaction.
Set internal variable	Internal variable inboundRoaming SetValue [\$outboundRoaming==[[wizard]]]	<input type="checkbox"/>	The action allows setting the value for an internal variable that is valid for the entire duration of a transaction.
New action	Modify Diameter Header Parts [Add]	Add a new action to the action list that is applied when the conditions of the Rule Template match on the message.	

Ok Apply Cancel

Figure 4: Screenshot of Roaming Scenario Identification Template

2.4.2 Template 2: Application ID and CC WhiteList for Inbound Roamers

This template is applicable for the subscriber marked as Valid Inbound Subscriber by Template 1 "Roaming Scenario Identification."

If the diameter message is for inbound subscriber, then this template is executed.

This template checks for \$msgDisallowed (to allow this message or not), @msg.application_id (to check that application ID is in the whitelist or not) and @msg.command.code (to check that this command code is allowed or not).

If above conditions are satisfied, then it allows the message by setting \$msgDisallowed = 0.

If not satisfied, then it abandons the message by setting \$msgDisallowed = 10. 10 indicates "Application ID and CC whitelist for inbound roammers" template check fails for this message. Hence, every template sets a different msgDisallowed value in case of failure.

It is associated with trigger point RTP1.

Template Definition

IF	\$inboundRoaming	is	true
AND	\$msgDisallowed	is	false
AND	@msg.application_id	equals	list of application IDs
AND	@msg.command.code	equals	list of command-codes per application ID
THEN	Set Internal Variable:	\$msgDisallowed = 0 for all the rules except the default rule: \$msgDisallowed = 10	

Note: CC can be optional, i.e., App-ID can be put on the whitelist without setting any CC. If you decide not to put CC in the whitelist, then only the App-ID filters the messages irrespective of CC in messages.

Settings		
Rule Template Name	Application Id and CC white list for inbound roamers-RTP1 *	
Message type support	Request: ✓ Answer: ✓	
Conditions		
Fast search ✓	A	
Name	Check for InboundRoamers	
Description	Check for InboundRoamers	
Left value	\$inboundRoaming	
Operator	is true	Case sensitive <input type="checkbox"/>
Right value	Integer32	
Default value	[wizard]	
Optional <input type="checkbox"/> Fixed <input type="checkbox"/>		
Fast search ✓	B	
Name	Check for msgDisallow	
Description	Check for msgDisallow	
Left value	\$msgDisallow	
Operator	is false	Case sensitive <input type="checkbox"/>
Right value	Integer32	
Default value	[wizard]	
Optional <input type="checkbox"/> Fixed <input type="checkbox"/>		
Fast search ✓	C	
Name	Check for ApplicationId	
Description	Check for ApplicationId	
Left value	@msg.application_id	
Operator	==	Case sensitive <input type="checkbox"/>
Right value	Integer32	
Default value	16777251	
Optional <input type="checkbox"/> Fixed <input type="checkbox"/>		
Fast search ✓	D	
Name	Check for CommandCode	
Description	Check for CommandCode	
Left value	@msg.command.code	
Operator	==	Case sensitive <input type="checkbox"/>
Right value	Integer32	
Default value	360	
Optional <input checked="" type="checkbox"/> Fixed <input type="checkbox"/>		
Fast search ✓	B	
Name	Check for msgDisallow	
Description	Check for msgDisallow	
Left value	\$msgDisallow	
Operator	is false	Case sensitive <input type="checkbox"/>
Right value	Integer32	
Default value	[wizard]	
Optional <input type="checkbox"/> Fixed <input type="checkbox"/>		
Fast search ✓	C	
Name	Check for ApplicationId	
Description	Check for ApplicationId	
Left value	@msg.application_id	
Operator	==	Case sensitive <input type="checkbox"/>
Right value	Integer32	
Default value	16777251	
Optional <input type="checkbox"/> Fixed <input type="checkbox"/>		
Fast search ✓	D	
Name	Check for CommandCode	
Description	Check for CommandCode	
Left value	@msg.command.code	
Operator	==	Case sensitive <input type="checkbox"/>
Right value	Integer32	
Default value	360	
Optional <input type="checkbox"/> Fixed <input type="checkbox"/>		
[Add]		
Condition Set	<input checked="" type="radio"/> ANDed <input type="radio"/> ORed <input type="radio"/> Complex Expression <input type="checkbox"/> A AND B AND C AND D	
Specify whether the conditions are logically ANDed, ORed or they form a complex logical expression like: (A OR B) AND C. If the condition set contains both AND and OR, Try to optimize the complex expression to achieve the fast-search logic.		
Actions		
Action	Default Values	Optional
Set internal variable	Internal variable msgDisallow	<input type="checkbox"/> <input type="checkbox"/>
New action	Modify Diameter Header Parts	[Add]
[Ok] [Apply] [Cancel]		

Figure 5: Screenshot of Application ID and CC Whitelist for Inbound Roamers Configured Template

2.4.3 Template 3: Application ID and CC Whitelist for Outbound Roamers

This template is applicable for the subscriber marked as Valid Outbound Subscriber by Template 1(i.e., roaming scenario identification).

If the diameter message is from outbound subscriber, then this template is executed.

This template checks for \$msgDisallowed (to allow this message or not), @msg.application_id (to check that application ID is in the whitelist or not) and @msg.command.code (to check that this command code is allowed or not).

If above conditions satisfied, then it allows the message by setting \$msgDisallowed = 0.

If not satisfied, then it abandons the message by setting \$msgDisallowed = 20. 20 indicates “Application ID and CC whitelist for outbound roamers” template check fails for this message. Hence, every template sets a different msgDisallowed value in case of failure.

It is associated with trigger point RTP1.

Template Definition

IF	\$inboundRoaming	is	true
AND	\$msgDisallowed	is	false
AND	@msg.application_id	equals	list of application IDs
AND	@msg.command.code	equals	list of command-codes per application ID
THEN	Set Internal Variable:		\$msgDisallowed = 0 for all the rules except the default rule: \$msgDisallowed = 20

Note: CC can be optional, i.e., App-ID can be put on the whitelist without setting any CC. If you decide not to put CC in the whitelist, then only the App-ID filters the messages irrespective of CC in messages.

Main Menu: Diameter -> Mediation -> Rule Templates [Edit]

Fri Jan 06 12:

Settings		Description
Rule Template Name	Application Id and CC white list for outbound roammers-RTP1	
Message type support	Request <input checked="" type="checkbox"/>	Indicates what type of message processing is supported by the Rule Template, i.e. Request, Answer, or both. The message type depends on the selected conditions and actions.
Conditions		
Fast search	A	
Name	Check for Outbound Roamers	
Description	Check for Outbound Roamers	
Left value	\$outboundRoaming	
Operator	is true	Case sensitive <input type="checkbox"/>
Right value	Integer32	
Default value	[wizard]	
Optional	<input type="checkbox"/>	Fixed <input type="checkbox"/>
Fast search	B	
Name	Check for msgDisallowed	
Description	Check for msgDisallowed	
Left value	\$msgDisallowed	
Operator	is false	Case sensitive <input type="checkbox"/>
Right value	Integer32	
Default value	[wizard]	
Optional	<input type="checkbox"/>	Fixed <input type="checkbox"/>
Fast search	C	
Name	Check for ApplicationId	
Description	Check for ApplicationId	
Left value	@msg.application_id	
Operator	==	Case sensitive <input type="checkbox"/>
Right value	Integer32	
Default value	16777251	
Optional	<input checked="" type="checkbox"/>	Fixed <input type="checkbox"/>
Name	Check for msgDisallowed	
Description	Check for msgDisallowed	
Left value	\$msgDisallowed	
Operator	is false	Case sensitive <input type="checkbox"/>
Right value	Integer32	
Default value	[wizard]	
Optional	<input type="checkbox"/>	Fixed <input type="checkbox"/>
Fast search	C	
Name	Check for ApplicationId	
Description	Check for ApplicationId	
Left value	@msg.application_id	
Operator	==	Case sensitive <input type="checkbox"/>
Right value	Integer32	
Default value	16777251	
Optional	<input checked="" type="checkbox"/>	Fixed <input type="checkbox"/>
Fast search	D	
Name	Check for Commandcode	
Description	Check for Commandcode	
Left value	@msg.command.code	
Operator	==	Case sensitive <input type="checkbox"/>
Right value	Integer32	
Default value	316	
Optional	<input checked="" type="checkbox"/>	Fixed <input type="checkbox"/>
[Add]		
Condition Set	<input checked="" type="radio"/> ANDed <input type="radio"/> ORed <input type="radio"/> Complex Expression <input type="text" value="A AND B AND C AND D"/>	
Specify whether the conditions are logically ANDed, ORed or they form a complex logical expression like: (A OR B) AND C AND D. Use parentheses for the condition set that contains both AND and OR. Try to optimize the complex expression to achieve the best lookups.		
Actions		
Action	Default Values	Optional <input type="checkbox"/>
Set internal variable	Internal variable <input type="text" value="msgDisallowed"/>	Set Value <input type="text" value="0"/> [wizard]
New action	Modify Diameter Header Parts <input type="button" value="Add"/>	
Add a new action to the action list that is applied when the conditions of the Rule Template match on the message.		

Figure 6: Screenshot of Application ID and CC Whitelist for Outbound Roamers Configured Template

2.4.4 Template 4: OR Whitelist

This template checks the Origin Realm of the incoming diameter message against the whitelist of Origin Realms. If the message's Origin Realm is in the whitelist, then the diameter message is allowed for further processing, otherwise it is not.

This template checks for \$foreignIngressPeer (whitelisted foreign peer), \$msgDisallowed (to allow this message or not), and @msg.avp["Origin-Realm"] (to check that message's Origin Realm is in the whitelist or not).

If above conditions are satisfied, then it allows the message by setting \$msgDisallowed = 0.

If not satisfied, then it abandons the message by setting \$msgDisallowed = 30. 30 indicates "OR whitelist" template check fails for this message. Hence, every template sets a different msgDisallowed value in case of failure.

It is associated with trigger point RTP1.

Template Definition

IF	\$foreignIngressPeer	is	true
AND	\$msgDisallowed	is	false
AND	@msg.avp["Origin-Realm"]	equals	list of ORs
THEN	Set Internal Variable:	\$msgDisallowed = 0 for all the rules except the default rule: \$msgDisallowed = 30	

Note: The Origin-Realm is an optional condition. If you do not want to check origin realm, then use the empty value of origin realm or do not use this template.

Main Menu: Diameter -> Mediation -> Rule Templates [Edit]

Help
Fri Jan 06 12:52:24 2017 EST

Settings		Description	
Rule Template Name	OR whitelist-RTP1	Name used to label this Rule Template in the system [Default = n/a. Range = A 255 character string. Valid characters are [a-zA-Z], [0-9], space, dash (-), period (.), @, and underscore (_)]	
Message type support	Request: <input checked="" type="checkbox"/> Answer: <input checked="" type="checkbox"/>	Indicates what type of message processing is supported by the Rule Template, i.e. Request, Answer, or both. The message type support depends on the selected conditions and actions.	
Conditions			
Fast search	<input checked="" type="checkbox"/> A	^X	
Name	Check for Foreign Ingress Peer	* [wizard]	
Description	Check for Foreign Ingress Peer	* [wizard]	
Left value	\$foreignIngressPeer	* [wizard]	
Operator	is true <input type="checkbox"/> Case sensitive <input type="checkbox"/>	[wizard]	
Right value	Integer32	[wizard]	
Default value		[wizard]	
Optional	<input type="checkbox"/> Fixed <input type="checkbox"/>		
Fast search	<input checked="" type="checkbox"/> B	^X	
Name	Check for msgDisallowed	* [wizard]	
Description	Check for msgDisallowed	* [wizard]	
Left value	\$msgDisallowed	* [wizard]	
Operator	is false <input type="checkbox"/> Case sensitive <input type="checkbox"/>	[wizard]	
Right value	Integer32	[wizard]	
Default value		[wizard]	
Optional	<input type="checkbox"/> Fixed <input type="checkbox"/>		
Fast search	<input checked="" type="checkbox"/> C	^X	
Name	Check for Origin Realm AVP	* [wizard]	
Description	Check for Origin Realm AVP	* [wizard]	
Left value	@msg.avp["Origin-Realm"][1].data	* [wizard]	
Operator	== <input type="checkbox"/> Case sensitive <input type="checkbox"/>	[wizard]	
Right value	DiameterIdentity	[wizard]	
Default value	fwmme1.com	[wizard]	
Optional	<input checked="" type="checkbox"/> Fixed <input type="checkbox"/>		
[Add]			
Name	Check for Foreign Ingress Peer	* [wizard]	
Description	Check for Foreign Ingress Peer	* [wizard]	
Left value	\$foreignIngressPeer	* [wizard]	
Operator	is true <input type="checkbox"/> Case sensitive <input type="checkbox"/>	[wizard]	
Right value	Integer32	[wizard]	
Default value		[wizard]	
Optional	<input type="checkbox"/> Fixed <input type="checkbox"/>		
Fast search	<input checked="" type="checkbox"/> B	^X	
Name	Check for msgDisallowed	* [wizard]	
Description	Check for msgDisallowed	* [wizard]	
Left value	\$msgDisallowed	* [wizard]	
Operator	is false <input type="checkbox"/> Case sensitive <input type="checkbox"/>	[wizard]	
Right value	Integer32	[wizard]	
Default value		[wizard]	
Optional	<input type="checkbox"/> Fixed <input type="checkbox"/>		
Fast search	<input checked="" type="checkbox"/> C	^X	
Name	Check for Origin Realm AVP	* [wizard]	
Description	Check for Origin Realm AVP	* [wizard]	
Left value	@msg.avp["Origin-Realm"][1].data	* [wizard]	
Operator	== <input type="checkbox"/> Case sensitive <input type="checkbox"/>	[wizard]	
Right value	DiameterIdentity	[wizard]	
Default value	fwmme1.com	[wizard]	
Optional	<input checked="" type="checkbox"/> Fixed <input type="checkbox"/>		
[Add]			
Condition Set	<input checked="" type="radio"/> ANDed <input type="radio"/> ORed <input type="radio"/> Complex Expression: A AND B AND C	Specify whether the conditions are logically ANDed, ORed or they form a complex logical expression like: (A OR B) AND (C AND D). Use parentheses for the condition set that contains both AND and OR. Try to optimize the complex expression to achieve fast lookups.	
Actions		Description	
Action	Default Values	Optional	
Set internal variable	Internal variable: msgDisallowed Set Value: 0 [wizard]	<input type="checkbox"/>	^X
New action	Modify Diameter Header Parts [Add]	Add a new action to the action list that is applied when the conditions of the Rule Template match on the message.	

Ok Apply Cancel

Figure 7: Screenshot of OR Whitelist Configured Template

2.4.5 Template 5: DR Whitelist

After successful execution of Template 4 “OR Whitelist,” if \$msgDisallowed is 0 (message is still allowed for further processing), then Template 5 DR Whitelist is executed.

This template checks the Destination Realm of the incoming diameter message against the whitelist of Destination Realms. If the Destination Realm is in the whitelist, then the diameter message is allowed for further processing.

This template checks for \$foreignIngressPeer (whitelisted foreign peer), \$msgDisallowed (to allow this message or not), and @msg.avp["Destination-Realm"] (to check that Destination Realm is in the whitelist or not).

If above conditions are satisfied, then it allows the message by setting \$msgDisallowed = 0.

If not satisfied, then it abandons the message by setting \$msgDisallowed = 40. 40 indicates “DR whitelist” template check fails for this message. Hence, every template sets different msgDisallowed value in case of failure.

It is associated with trigger point RTP1.

Template Definition

IF	\$foreignIngressPeer	is	true
AND	\$msgDisallowed	is	false
AND	@msg.avp["Destination-Realm"]	equals	list of DRs
THEN	Set Internal Variable:	\$msgDisallowed = 0 for all the rules except the default rule: \$msgDisallowed = 40	

Note: The Destination-Realm is an optional condition. If you do not want to check the destination realm, then use the empty value of destination realm or do not use this template.

Main Menu: Diameter -> Mediation -> Rule Templates [Edit]

Fri Jan

Settings		Description
Rule Template Name	DR whitelist-RTP1	Name used to label this Rule Template in the system [Default = n/a. Range = A 255 character string. Valid characters are [a-z], [A-Z], [0-9], space, dash (-), period (.), @, and underscore (_).]
Message type support	Request: ✓ Answer: ✓	Indicates what type of message processing is supported by the Rule Template, i.e. Request, Answer, or both. The message depends on the selected conditions and actions.
Conditions		
Fast search	A	
Name	Check for Foreign Ingress Peer	^x
Description	Check for Foreign Ingress Peer	^v
Left value	\$foreignIngressPeer	* [wizard]
Operator	is true	Case sensitive <input type="checkbox"/>
Right value	Integer32	
Default value		[wizard]
Optional	<input type="checkbox"/>	Fixed <input type="checkbox"/>
Fast search	B	
Name	Check for msgDisallow	^x
Description	Check for msgDisallow	^v
Left value	\$msgDisallow	* [wizard]
Operator	is false	Case sensitive <input type="checkbox"/>
Right value	Integer32	
Default value		[wizard]
Optional	<input type="checkbox"/>	Fixed <input type="checkbox"/>
Fast search	C	
Name	Check for Destination-Realm AVP	^x
Description	Check for Destination-Realm AVP	^v
Left value	@msg.avp["Destination-Realm"][:1].data	* [wizard]
Operator	==	Case sensitive <input type="checkbox"/>
Right value	DiameterIdentity	
Default value	homme1.com	[wizard]
Optional	<input checked="" type="checkbox"/>	Fixed <input type="checkbox"/>
[Add]		
Name	Check for Foreign Ingress Peer	^x
Description	Check for Foreign Ingress Peer	^v
Left value	\$foreignIngressPeer	* [wizard]
Operator	is true	Case sensitive <input type="checkbox"/>
Right value	Integer32	
Default value		[wizard]
Optional	<input type="checkbox"/>	Fixed <input type="checkbox"/>
Fast search	B	
Name	Check for msgDisallow	^x
Description	Check for msgDisallow	^v
Left value	\$msgDisallow	* [wizard]
Operator	is false	Case sensitive <input type="checkbox"/>
Right value	Integer32	
Default value		[wizard]
Optional	<input type="checkbox"/>	Fixed <input type="checkbox"/>
Fast search	C	
Name	Check for Destination-Realm AVP	^x
Description	Check for Destination-Realm AVP	^v
Left value	@msg.avp["Destination-Realm"][:1].data	* [wizard]
Operator	==	Case sensitive <input type="checkbox"/>
Right value	DiameterIdentity	
Default value	homme1.com	[wizard]
Optional	<input checked="" type="checkbox"/>	Fixed <input type="checkbox"/>
[Add]		
Condition Set	<input checked="" type="radio"/> ANDed <input type="radio"/> ORed <input type="radio"/> Complex Expression: A AND B AND C	
Actions		
Action	Default Values	Optional
Set internal variable	Internal variable msgDisallow	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
New action	Modify Diameter Header Parts	[Add]

Figure 8: Screenshot of DR Whitelist Configured Template

2.4.6 Template 6: OH Ends with OR

After successful screening of the diameter message with Template 5 “DR whitelist,” if the internal variable \$msgDisallowed is still false, then it means the diameter message is allowed for further processing and Template 6 “Origin Host Ends with Origin Realm” is executed.

This template picks the Origin-Host and Origin-Realm AVP from the diameter message and it checks that the Origin-Host is ending with Origin-Realm or not.

If not, then it abandons the diameter message and sets \$msgDisallowed = 50.

It also checks for \$foreignIngressPeer and \$msgDisallowed in the same way as it has been tested by the previous template.

It is associated with trigger point RTP1.

Template Definition

```
IF      $foreignIngressPeer      is      true
AND    $msgDisallowed      is      false
AND    @msg.avp["Origin-Host"]      does not end with      "." + @msg.avp["Origin-Realm"]
THEN   Set Internal Variable:      $msgDisallowed = 50
```

Below is the screen shot of configured template “OH ends with OR”:

Main Menu: Diameter -> Mediation -> Rule Templates [Edit]

Settings		Description
Rule Template Name	OH ends with OR-RTP1	Name used to label this Rule Template in the system [Default = n/a. Range = A 255 character string. Valid characters are [a-z], [A-Z], [0-9], \$]
Message type support	Request <input checked="" type="checkbox"/> Answer: <input checked="" type="checkbox"/>	Indicates what type of message processing is supported by the Rule Template, i.e. F depends on the selected conditions and actions.
Conditions		
Fast search	A	<input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
Name	Check for Foreign Ingress Peer	<input checked="" type="checkbox"/> <input type="checkbox"/>
Description	Check for Foreign Ingress Peer	<input checked="" type="checkbox"/> <input type="checkbox"/>
Left value	\$foreignIngressPeer	<input checked="" type="checkbox"/> [wizard]
Operator	is true <input type="checkbox"/> Case sensitive <input type="checkbox"/>	
Right value	Integer32	<input type="checkbox"/>
Default value		[wizard]
Optional <input type="checkbox"/> Fixed <input type="checkbox"/>		
Fast search	B	<input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
Name	Check for msgDisallow	<input checked="" type="checkbox"/> <input type="checkbox"/>
Description	Check for msgDisallow	<input checked="" type="checkbox"/> <input type="checkbox"/>
Left value	\$msgDisallow	<input checked="" type="checkbox"/> [wizard]
Operator	is false <input type="checkbox"/> Case sensitive <input type="checkbox"/>	
Right value	Integer32	<input type="checkbox"/>
Default value		[wizard]
Optional <input type="checkbox"/> Fixed <input type="checkbox"/>		
Fast search	C	<input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
Name	Check for Origin-Host AVP	<input checked="" type="checkbox"/> <input type="checkbox"/>
Description	Origin-Host AVP Value does not ends with Origin-Realm AVP Value	<input checked="" type="checkbox"/> <input type="checkbox"/>
Left value	@msg.avp["Origin-Host"][1].data	<input checked="" type="checkbox"/> [wizard]
Operator	!=\$ <input type="checkbox"/> Case sensitive <input type="checkbox"/>	
Right value	xl-value	<input type="checkbox"/>
Default value	"" + @msg.avp["Origin-Realm"]	[wizard]
Optional <input type="checkbox"/> Fixed <input checked="" type="checkbox"/>		
Name	Check for Foreign Ingress Peer	<input checked="" type="checkbox"/> <input type="checkbox"/>
Description	Check for Foreign Ingress Peer	<input checked="" type="checkbox"/> <input type="checkbox"/>
Left value	\$foreignIngressPeer	<input checked="" type="checkbox"/> [wizard]
Operator	is true <input type="checkbox"/> Case sensitive <input type="checkbox"/>	
Right value	Integer32	<input type="checkbox"/>
Default value		[wizard]
Optional <input type="checkbox"/> Fixed <input type="checkbox"/>		
Fast search	B	<input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
Name	Check for msgDisallow	<input checked="" type="checkbox"/> <input type="checkbox"/>
Description	Check for msgDisallow	<input checked="" type="checkbox"/> <input type="checkbox"/>
Left value	\$msgDisallow	<input checked="" type="checkbox"/> [wizard]
Operator	is false <input type="checkbox"/> Case sensitive <input type="checkbox"/>	
Right value	Integer32	<input type="checkbox"/>
Default value		[wizard]
Optional <input type="checkbox"/> Fixed <input type="checkbox"/>		
Fast search	C	<input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
Name	Check for Origin-Host AVP	<input checked="" type="checkbox"/> <input type="checkbox"/>
Description	Origin-Host AVP Value does not ends with Origin-Realm AVP Value	<input checked="" type="checkbox"/> <input type="checkbox"/>
Left value	@msg.avp["Origin-Host"][1].data	<input checked="" type="checkbox"/> [wizard]
Operator	!=\$ <input type="checkbox"/> Case sensitive <input type="checkbox"/>	
Right value	xl-value	<input type="checkbox"/>
Default value	"" + @msg.avp["Origin-Realm"]	[wizard]
Optional <input type="checkbox"/> Fixed <input checked="" type="checkbox"/>		
<input type="button" value="Add"/> Condition Set		
<input checked="" type="radio"/> ANDed <input type="radio"/> ORed <input type="radio"/> Complex Expression: A AND B AND C		
Specify whether the conditions are logically ANDed, ORed or they form a complex logical expression like: (A OR B) AND C AND (D OR E). Use parentheses for the condition set that contains both AND and OR. Try to optimize the complex expression to achieve the fast-search lookups.		
Actions		
Action	Default Values Internal variable	Optional
Set internal variable	msgDisallow Set Value: 50	<input type="checkbox"/> <input type="checkbox"/>
New action	Modify Diameter Header Parts	[Add]
Add a new action to the action list that is applied when the conditions of the Rule Template match on the message.		

Figure 9: Screenshot of OH Ends with OR Configured Template

2.4.7 Template 7: Handle Route Record AVP

After successful screening of diameter message with Template 6 “OH Ends with OR,” if the internal variable \$msgDisallowed is still false, it means the diameter message is allowed for further processing and Template 7 “Handle Route Record AVP” is executed.

This template basically iterated through all the route record AVPs which are present in the diameter message and will compare each rout record AVP with blacklist of Realms. If any Rout Record AVP from diameter message match with ANY realm from blacklisted realms then it will abandoned the message by setting \$msgDisallowed = 60.

It is associated with trigger point RTP1.

Template Definition

```
IF      $foreignIngressPeer      is      true
AND    $msgDisallowed      is      false
AND    `@msg.avp["Route-Record"][[any].data      ends with      list of realms
THEN   Set Internal Variable:      $msgDisallowed = 60
```

Note: In this template, we are using ANY keyword, which acts as a loop and iterates through all the route record AVPs to find out blacklisted realms present in any of the route record AVPs. Create one rule for each blacklisted realm.

The right hand side type is set to xl-value to a force slow-search.

Main Menu: Diameter -> Mediation -> Rule Templates [Edit]

Settings		Description
Rule Template Name	Handle RouteRecord AVP	Name used to label this Rule Template in the system [Default = n/a. Range = A 255 character string. Valid characters are [a-z], [A-Z], [0-9], space, dash (-), period (.), @, a
Message type support	Request <input checked="" type="checkbox"/> Answer <input checked="" type="checkbox"/>	Indicates what type of message processing is supported by the Rule Template, i.e. Request, Answer, or both. The depends on the selected conditions and actions.
Conditions		
Fast search	A	When the condition set matches on the message, the selected actions are applied in the order they are shown. Each <left-hand operand> <operator> <right-hand operand> triple where <right-hand operand> is either a value provisioned by the Administrator or a fixed value that comes for example from the message being processed. In the former case, "name" is provisioned in the provisioning screen instead of <left-hand operand> and the value is pre-filled by the "default value". "Optional" makes "Fast search" results in fast database lookups.
Name	Check for Foreign Ingress Peer	
Description	Check for Foreign Ingress Peer	
Left value	\$foreignIngressPeer	* [wizard]
Operator	is true <input type="checkbox"/> Case sensitive <input type="checkbox"/>	
Right value	Integer32	
Default value		[wizard]
Optional	<input type="checkbox"/> Fixed <input type="checkbox"/>	
Fast search	B	
Name	Check for msgDisallow	
Description	Check for msgDisallow	
Left value	\$msgDisallow	* [wizard]
Operator	is false <input type="checkbox"/> Case sensitive <input type="checkbox"/>	
Right value	Integer32	
Default value		[wizard]
Optional	<input type="checkbox"/> Fixed <input type="checkbox"/>	
Fast search	C	
Name	Check for RouteRecord AVP	
Description	RouteRecord AVP, if any Route-Record AVP is ending with blacklisted re	
Left value	@msg.avp["Route-Record"][:any].data	* [wizard]
Operator	=\$ <input type="checkbox"/> Case sensitive <input type="checkbox"/>	
Right value	xi-value	
Default value	blistmme1.com	[wizard]
Optional	<input checked="" type="checkbox"/> Fixed <input type="checkbox"/>	
[Add]		
Name	Check for Foreign Ingress Peer	
Description	Check for Foreign Ingress Peer	
Left value	\$foreignIngressPeer	* [wizard]
Operator	is true <input type="checkbox"/> Case sensitive <input type="checkbox"/>	
Right value	Integer32	
Default value		[wizard]
Optional	<input type="checkbox"/> Fixed <input type="checkbox"/>	
Fast search	B	
Name	Check for msgDisallow	
Description	Check for msgDisallow	
Left value	\$msgDisallow	* [wizard]
Operator	is false <input type="checkbox"/> Case sensitive <input type="checkbox"/>	
Right value	Integer32	
Default value		[wizard]
Optional	<input type="checkbox"/> Fixed <input type="checkbox"/>	
Fast search	C	
Name	Check for RouteRecord AVP	
Description	RouteRecord AVP, if any Route-Record AVP is ending with blacklisted re	
Left value	@msg.avp["Route-Record"][:any].data	* [wizard]
Operator	=\$ <input type="checkbox"/> Case sensitive <input type="checkbox"/>	
Right value	xi-value	
Default value	blistmme1.com	[wizard]
Optional	<input checked="" type="checkbox"/> Fixed <input type="checkbox"/>	
[Add]		
Condition Set	<input checked="" type="radio"/> ANDed <input type="radio"/> ORed <input type="radio"/> Complex Expression: A AND B AND C	Specify whether the conditions are logically ANDed, ORed or they form a complex logical expression like: (A OR B) AND (C OR D). Use parentheses for the condition set that contains both AND and OR. Try to optimize the complex expression to achieve better performance.
Actions		Description
Action	Default Values	Optional
Set internal variable	Internal variable: msgDisallow Set Value: 60 [wizard]	<input type="checkbox"/> <input type="checkbox"/> The action allows setting the value for an internal variable that is valid for the entire duration of a transaction.
New action	Modify Diameter Header Parts [Add]	Add a new action to the action list that is applied when the conditions of the Rule Template match on the message.

Figure 10: Screenshot of Handle Route Record AVP Configured Template

2.4.8 Template 8: Handle Disallowed Requests

Template 8 picks certain AVPs from the diameter message, and tests them again with certain countermeasure, which you configure.

If the diameter message fails at any countermeasure, then \$msgDisallowed is set to a non-zero integer.

This template acts on the \$msgDisallowed value.

Template 8 takes three types of action, but you can be modify the requirements.

- Peg Counter:** Count the number of disallowed request.
- Raise Alarm:** Include the value of \$msgDisallowed in the alarm description.
- Abandon** the diameter message.

It is associated with trigger point RTP1.

Template Definition

IF	\$msgDisallowed	is true
THEN	Peg counter	Count the number of disallowed ingress requests
	Raise alarm	Include the value of \$msgDisallowed in the alarm description
	Abandon message	

Main Menu: Diameter -> Mediation -> Rule Templates [Edit]

Ok	Apply	Cancel												
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%;">Settings</th> <th style="width: 90%;">Description</th> </tr> </thead> <tbody> <tr> <td>Rule Template Name</td> <td>Handle disallowed requests</td> </tr> <tr> <td>Message type support</td> <td>Request <input checked="" type="checkbox"/> Answer: <input checked="" type="checkbox"/></td> </tr> </tbody> </table>			Settings	Description	Rule Template Name	Handle disallowed requests	Message type support	Request <input checked="" type="checkbox"/> Answer: <input checked="" type="checkbox"/>						
Settings	Description													
Rule Template Name	Handle disallowed requests													
Message type support	Request <input checked="" type="checkbox"/> Answer: <input checked="" type="checkbox"/>													
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%;">Conditions</th> <th style="width: 90%;">Description</th> </tr> </thead> <tbody> <tr> <td> Fast search <input checked="" type="checkbox"/> A Name: <input type="text" value="Check for msgDisallowed"/> * Description: <input type="text" value="Check for msgDisallowed"/> Left value: <input type="text" value="\$msgDisallowed"/> * [wizard] Operator: <input type="button" value="=="/> Case sensitive <input type="checkbox"/> Right value: <input type="text" value="Integer32"/> Default value: <input type="text" value="0"/> [wizard] <input type="checkbox"/> Optional <input type="checkbox"/> Fixed </td> <td>When the condition set matches on the message, the selected actions are applied in the order they are shown. Each condition is a <left-hand operand> <operator> <right-hand operand> triple where <right-hand operand> is either a value provision by the Administrator or a fixed value that comes for example from the message being processed. In the former case, "name" is the name of the attribute on the selected conditions and actions.</td> </tr> </tbody> </table>			Conditions	Description	Fast search <input checked="" type="checkbox"/> A Name: <input type="text" value="Check for msgDisallowed"/> * Description: <input type="text" value="Check for msgDisallowed"/> Left value: <input type="text" value="\$msgDisallowed"/> * [wizard] Operator: <input type="button" value="=="/> Case sensitive <input type="checkbox"/> Right value: <input type="text" value="Integer32"/> Default value: <input type="text" value="0"/> [wizard] <input type="checkbox"/> Optional <input type="checkbox"/> Fixed	When the condition set matches on the message, the selected actions are applied in the order they are shown. Each condition is a <left-hand operand> <operator> <right-hand operand> triple where <right-hand operand> is either a value provision by the Administrator or a fixed value that comes for example from the message being processed. In the former case, "name" is the name of the attribute on the selected conditions and actions.								
Conditions	Description													
Fast search <input checked="" type="checkbox"/> A Name: <input type="text" value="Check for msgDisallowed"/> * Description: <input type="text" value="Check for msgDisallowed"/> Left value: <input type="text" value="\$msgDisallowed"/> * [wizard] Operator: <input type="button" value="=="/> Case sensitive <input type="checkbox"/> Right value: <input type="text" value="Integer32"/> Default value: <input type="text" value="0"/> [wizard] <input type="checkbox"/> Optional <input type="checkbox"/> Fixed	When the condition set matches on the message, the selected actions are applied in the order they are shown. Each condition is a <left-hand operand> <operator> <right-hand operand> triple where <right-hand operand> is either a value provision by the Administrator or a fixed value that comes for example from the message being processed. In the former case, "name" is the name of the attribute on the selected conditions and actions.													
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%;">Condition Set</th> <th style="width: 90%;">Description</th> </tr> </thead> <tbody> <tr> <td> <input type="radio"/> ANDed <input type="radio"/> ORed <input type="radio"/> Complex Expression A </td> <td>Specify whether the conditions are logically ANDed, ORed or they form a complex logical expression like: (A OR B) AND (C AND D). Use parentheses for the condition set that contains both AND and OR. Try to optimize the complex expression to avoid performance issues. </td> </tr> </tbody> </table>			Condition Set	Description	<input type="radio"/> ANDed <input type="radio"/> ORed <input type="radio"/> Complex Expression A	Specify whether the conditions are logically ANDed, ORed or they form a complex logical expression like: (A OR B) AND (C AND D). Use parentheses for the condition set that contains both AND and OR. Try to optimize the complex expression to avoid performance issues.								
Condition Set	Description													
<input type="radio"/> ANDed <input type="radio"/> ORed <input type="radio"/> Complex Expression A	Specify whether the conditions are logically ANDed, ORed or they form a complex logical expression like: (A OR B) AND (C AND D). Use parentheses for the condition set that contains both AND and OR. Try to optimize the complex expression to avoid performance issues.													
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%;">Actions</th> <th style="width: 90%;">Description</th> </tr> </thead> <tbody> <tr> <td>Assert Alarm/Event</td> <td>Default Values Alarm/Event Mediation Generic Alarm -- Major <input type="checkbox"/> Additional info: <input type="text" value="["/> [wizard] <input type="text" value="]"/> This action allows raising an alarm if the conditions for the rule match.</td> </tr> <tr> <td>Peg Counter</td> <td>Measurement measurement_1012 <input type="checkbox"/> Peg selected measurement</td> </tr> <tr> <td>Abandon Message</td> <td><input type="checkbox"/> Silently drop the message. The action is supported by Requests and Answers.</td> </tr> <tr> <td>Exit from Execution Trigger</td> <td><input type="checkbox"/> Exit from the Execution Trigger bypassing any subsequent Rule Template in it</td> </tr> <tr> <td>New action</td> <td><input type="text" value="Modify Diameter Header Parts"/> [Add] Add a new action to the action list that is applied when the conditions of the Rule Template match on the message.</td> </tr> </tbody> </table>			Actions	Description	Assert Alarm/Event	Default Values Alarm/Event Mediation Generic Alarm -- Major <input type="checkbox"/> Additional info: <input type="text" value="["/> [wizard] <input type="text" value="]"/> This action allows raising an alarm if the conditions for the rule match.	Peg Counter	Measurement measurement_1012 <input type="checkbox"/> Peg selected measurement	Abandon Message	<input type="checkbox"/> Silently drop the message. The action is supported by Requests and Answers.	Exit from Execution Trigger	<input type="checkbox"/> Exit from the Execution Trigger bypassing any subsequent Rule Template in it	New action	<input type="text" value="Modify Diameter Header Parts"/> [Add] Add a new action to the action list that is applied when the conditions of the Rule Template match on the message.
Actions	Description													
Assert Alarm/Event	Default Values Alarm/Event Mediation Generic Alarm -- Major <input type="checkbox"/> Additional info: <input type="text" value="["/> [wizard] <input type="text" value="]"/> This action allows raising an alarm if the conditions for the rule match.													
Peg Counter	Measurement measurement_1012 <input type="checkbox"/> Peg selected measurement													
Abandon Message	<input type="checkbox"/> Silently drop the message. The action is supported by Requests and Answers.													
Exit from Execution Trigger	<input type="checkbox"/> Exit from the Execution Trigger bypassing any subsequent Rule Template in it													
New action	<input type="text" value="Modify Diameter Header Parts"/> [Add] Add a new action to the action list that is applied when the conditions of the Rule Template match on the message.													
<input type="button" value="Ok"/> <input type="button" value="Apply"/> <input type="button" value="Cancel"/>														

Figure 11: Screenshot of Handle Disallowed Requests Configured Template

2.4.9 Template 9a: Remove DOIC AVP

After successful execution of Template 8 “Handle Disallowed Requests,” if the message has failed at any countermeasure check, then the “Handle Disallowed Requests” template abandons the message (As per current configuration).

Once the diameter message passes all the above countermeasure checks (\$msgDisallowed is still 0), then Template 9a “Remove DOIC AVP” is executed.

It checks for DOIC AVP (OC-Supported-Features and OC-OLR AVPs). If it is present in the diameter message, then it deletes the DOIC AVPs and forwards the message for further processing.

It is associated with trigger point RTP1.

Template Definition

IF	\$foreignIngressPeer	is	true
AND	@msg.avp[“OC-Supported-Features”]	exists	
OR	@msg.avp[“OC-OLR”]	exists	
THEN	Delete AVP	OC-Supported-Features	
	Delete AVP	OC-OLR	

Main Menu: Diameter -> Mediation -> Rule Templates [Edit]

Settings		Description	
Rule Template Name	Remove DOIC AVP-RTP1	Name used to label this Rule Template in the system [Default = n/a. Range = A 255 character string. Valid characters are [a-z], [A-Z], [0-9], space, dash (-), period (.), @]	
Message type support	Request: <input checked="" type="checkbox"/> Answer: <input checked="" type="checkbox"/>	Indicates what type of message processing is supported by the Rule Template, i.e. Request, Answer, or both. This depends on the selected conditions and actions.	
Conditions			
Fast search	A		Description
Name	Check for foreignIngressPeer		
Description	Check for foreignIngressPeer		
Left value	\$foreignIngressPeer		* [wizard]
Operator	is true	Case sensitive <input type="checkbox"/>	
Right value	Integer32		
Default value			[wizard]
Optional <input type="checkbox"/> Fixed <input type="checkbox"/>			
Fast search	B		Description
Name	Check for AVP OC-Supported-Features		
Description	Check for AVP OC-Supported-Features		
Left value	@msg.avp["OC-Supported-Features"][1].data		* [wizard]
Operator	exists	Case sensitive <input type="checkbox"/>	
Right value	Integer32		
Default value			[wizard]
Optional <input type="checkbox"/> Fixed <input type="checkbox"/>			
Fast search	C		Description
Name	Check for OC-OLR AVP		
Description	Check for OC-OLR AVP		
Left value	@msg.avp["OC-OLR"][1].data		* [wizard]
Operator	exists	Case sensitive <input type="checkbox"/>	
Right value	Integer32		
Default value			[wizard]
Optional <input type="checkbox"/> Fixed <input type="checkbox"/>			
[Add]			
Condition Set	<input type="radio"/> ANDed <input type="radio"/> ORed <input checked="" type="radio"/> Complex Expression A AND (B OR C)		Description
Name	Check for AVP OC-Supported-Features		
Description	Check for AVP OC-Supported-Features		
Left value	@msg.avp["OC-Supported-Features"][1].data		* [wizard]
Operator	exists	Case sensitive <input type="checkbox"/>	
Right value	Integer32		
Default value			[wizard]
Optional <input type="checkbox"/> Fixed <input type="checkbox"/>			
Fast search	C		Description
Name	Check for OC-OLR AVP		
Description	Check for OC-OLR AVP		
Left value	@msg.avp["OC-OLR"][1].data		* [wizard]
Operator	exists	Case sensitive <input type="checkbox"/>	
Right value	Integer32		
Default value			[wizard]
Optional <input type="checkbox"/> Fixed <input type="checkbox"/>			
[Add]			
Condition Set	<input type="radio"/> ANDed <input type="radio"/> ORed <input checked="" type="radio"/> Complex Expression A AND (B OR C)		Description
Action	Actions		Description
Delete AVP	Default Values Delete parent AVP if it is empty: <input type="checkbox"/> Instance OC-Supported-Features: \$index <input type="checkbox"/> <input type="button" value="X"/> OC-Feature-Vector: <input type="checkbox"/> [Add] <input type="checkbox"/> With the value: <input type="button" value="wizard"/>		The action allows deleting a specified AVP in the message.
Delete AVP	Default Values Delete parent AVP if it is empty: <input type="checkbox"/> Instance OC-OLR: \$index <input type="checkbox"/> <input type="button" value="X"/> OC-Reduction-Percentage: <input type="checkbox"/> [Add] <input type="checkbox"/> With the value: <input type="button" value="wizard"/>		The action allows deleting a specified AVP in the message.
New action	Modify Diameter Header Parts <input type="checkbox"/> [Add]		Add a new action to the action list that is applied when the conditions of the Rule Template match on the message.

Ok Apply Cancel

Figure 12: Screenshot of Remove DOIC AVP Configured Template

2.4.10 Template 9b: Remove DRMP AVP

After successful execution of Template 8 “Handle Disallowed Requests,” if the message has failed at any countermeasure check, then the “Handle Disallowed Requests” template abandons the message (As per current configuration).

Once the diameter message passes all the above countermeasure checks (`$msgDisallowed` is still 0), then Template 9b “Remove DRMP AVP” is executed.

It checks for DRMP AVP. If it is present in the diameter message, then it deletes the DRMP AVP and forwards the message for further processing.

It is associated with trigger point RTP1.

Template Definition

```
IF      $foreignIngressPeer      is      true
AND    @msg.avp["DRMP"]      exists
THEN  Delete AVP      DRMP
```

Settings		Description
Rule Template Name	Remove DRMP AVP-RTP1	* Name used to label this Rule Template in the system [Default = n/a. Range = A-Z55 character string. Valid characters are [a-z], [A-Z], [0-9], space, dash (-), period (.), @, and underscore (_).]
Message type support	Request <input checked="" type="checkbox"/> Answer: <input checked="" type="checkbox"/>	Indicates what type of message processing is supported by the Rule Template, i.e. Request, Answer, or both. The message type supports depends on the selected conditions and actions.
Conditions		Description
Fast search	<input checked="" type="checkbox"/> A Name: Check for Foreign Ingress Peer Description: Check for Foreign Ingress Peer Left value: \${foreignIngressPeer} [wizard] Operator: is true Case sensitive <input type="checkbox"/> Right value: Integer32 [wizard] Default value: Optional <input type="checkbox"/> Fixed <input type="checkbox"/>	When the condition set matches on the message, the selected actions are applied in the order they are shown. Each condition consists of <left-hand operand> <operator> <right-hand operand> triple where <right-hand operand> is either a value provisioned by the Rule Set Administrator or a fixed value that comes for example from the message being processed. In the former case, "name" is shown on the provisioning screen instead of <left-hand operand> and the value is pre-filled by the "default value". "Optional" makes the condition optional.
Fast search	<input checked="" type="checkbox"/> B Name: Check for DRMP AVP Description: Check for DRMP AVP Left value: \${msg.avp["DRMP"]}[1].data [wizard] Operator: exists Case sensitive <input type="checkbox"/> Right value: Integer32 [wizard] Default value: Optional <input type="checkbox"/> Fixed <input type="checkbox"/>	
<input type="button" value="Add"/>		Specify whether the conditions are logically ANDed, ORed or they form a complex logical expression like: (A OR B) AND C AND (D OR E). Use parentheses for the condition set that contains both AND and OR. Try to optimize the complex expression to achieve the fast-search lookups.
Actions		
Action	Default Values	Optional
Delete AVP	Delete parent AVP if it is empty: <input type="checkbox"/>	^~×
	Instance DRMP All [add] <input type="checkbox"/> With the value: [wizard]	
New action	Modify Diameter Header Parts [Add]	Add a new action to the action list that is applied when the conditions of the Rule Template match on the message.
<input type="button" value="Ok"/> <input type="button" value="Apply"/> <input type="button" value="Cancel"/>		

Figure 13: Screenshot of Remove DRMP AVP Configured Template

2.4.11 Template 10: Roaming Scenario Identification

Template 10 checks for an egress peer before sending the diameter message to the connection.

It checks for application ID s6a, which is fixed in the current configuration; egress peer (check for egress foreign peer); and command code. In the sample configuration, only two commands are allowed: AIR and ULR.

If the condition is satisfied, then the diameter message is marked for keeping track by setting \$foreignEgressPeer = 1.

It is associated with trigger point RTP10.

Template Definition

IF	@msg.application_id	equals	S6a	
AND	@dsr.egress.peer	equals	list of	foreign peers
AND	@msg.command.code	equals	AIR	
OR	@msg.command.code	equals	ULR	
THEN	Set Internal Variable:		\$foreignEgressPeer = 1	

Settings		Description	
Rule Template Name	Roaming scenario identification-RTP10	Name used to label this Rule Template in the system [Default = n/a. Range = A 255 character string. Valid characters are [a-z], [A-Z], [0-9], space, dash (-), period (.), @]	
Message type support	Request <input checked="" type="checkbox"/> Answer <input checked="" type="checkbox"/>	Indicates what type of message processing is supported by the Rule Template, i.e. Request, Answer, or both. This depends on the selected conditions and actions.	
Conditions			
Fast search	A	When the condition set matches on the message, the selected actions are applied in the order they are shown. Each condition set is either a value provided by the Administrator or a fixed value that comes for example from the message being processed. In the former case, "name" is shown in the provisioning screen instead of <left-hand operand> and the value is pre-filled by the "default value". "Optional" makes the condition set optional. "Fast search" results in fast database lookups.	
Name	Identifying the Egress peer		
Description	Check Peer for Roaming scenario identification		
Left value	@dsr.egress.peer	[wizard]	
Operator	== <input type="checkbox"/> Case sensitive <input type="checkbox"/>		
Right value	Peer		
Default value	FN_HSS1	[wizard]	
Optional	<input checked="" type="checkbox"/>	Fixed <input type="checkbox"/>	
Fast search	B		
Name	Check for Application ID		
Description	Check for Application ID		
Left value	@msg.application_id	[wizard]	
Operator	== <input type="checkbox"/> Case sensitive <input type="checkbox"/>		
Right value	Integer32		
Default value	16777251	[wizard]	
Optional	<input checked="" type="checkbox"/>	Fixed <input type="checkbox"/>	
Fast search	C		
Name	Check for Command code		
Description	Check for Command code		
Left value	@msg.command.code	[wizard]	
Operator	== <input type="checkbox"/> Case sensitive <input type="checkbox"/>		
Right value	Integer32		
Default value	316	[wizard]	
Optional	<input checked="" type="checkbox"/>	Fixed <input type="checkbox"/>	
[Add]			
Condition Set	<input checked="" type="radio"/> ANDed <input type="radio"/> ORed <input type="radio"/> Complex Expression: A AND B AND C	Specify whether the conditions are logically ANDed, ORed or they form a complex logical expression like: (A OR B) AND C AND D. Use parentheses for the condition set that contains both AND and OR. Try to optimize the complex expression to achieve fast lookups.	
Actions			
Fast search	A	When the condition set matches on the message, the selected actions are applied in the order they are shown. Each condition set is either a value provided by the Administrator or a fixed value that comes for example from the message being processed. In the former case, "name" is shown in the provisioning screen instead of <left-hand operand> and the value is pre-filled by the "default value". "Optional" makes the condition set optional. "Fast search" results in fast database lookups.	
Name	Identifying the Egress peer		
Description	Check Peer for Roaming scenario identification		
Left value	@dsr.egress.peer	[wizard]	
Operator	== <input type="checkbox"/> Case sensitive <input type="checkbox"/>		
Right value	Peer		
Default value	FN_HSS1	[wizard]	
Optional	<input checked="" type="checkbox"/>	Fixed <input type="checkbox"/>	
Fast search	B		
Name	Check for Application ID		
Description	Check for Application ID		
Left value	@msg.application_id	[wizard]	
Operator	== <input type="checkbox"/> Case sensitive <input type="checkbox"/>		
Right value	Integer32		
Default value	16777251	[wizard]	
Optional	<input checked="" type="checkbox"/>	Fixed <input type="checkbox"/>	
Fast search	C		
Name	Check for Command code		
Description	Check for Command code		
Left value	@msg.command.code	[wizard]	
Operator	== <input type="checkbox"/> Case sensitive <input type="checkbox"/>		
Right value	Integer32		
Default value	316	[wizard]	
Optional	<input checked="" type="checkbox"/>	Fixed <input type="checkbox"/>	
[Add]			
Condition Set	<input checked="" type="radio"/> ANDed <input type="radio"/> ORed <input type="radio"/> Complex Expression: A AND B AND C	Specify whether the conditions are logically ANDed, ORed or they form a complex logical expression like: (A OR B) AND C AND D. Use parentheses for the condition set that contains both AND and OR. Try to optimize the complex expression to achieve fast lookups.	
Actions			
Action	Default Values	Optional	Description
Set internal variable	Internal variable: foreignEgressPeer Set Value: 1	<input type="checkbox"/>	The action allows setting the value for an internal variable that is valid for the entire duration of a transaction.
New action	Modify Diameter Header Parts	[Add]	Add a new action to the action list that is applied when the conditions of the Rule Template match on the message.

Figure 14: Screenshot of Roaming Scenario Identification Configured Template

2.4.12 Template 11: Destination-Realm Whitelist

Once the Template 10 “Roaming Scenario Identification” successfully executes, and \$foreignEgressPeer is set to 1, Template 11 checks for Destination Realm AVP.

If the Destination Realm of the current diameter message is in the Destination Realm whitelist, then the \$msgDisallowed is set to 0; otherwise, \$msgDisallowed is 100, where 100 indicates the “Destination-Realm Whitelist” template check failed.

It is associated with trigger point RTP10.

Template Definition

IF	\$foreignEgressPeer	is	true
AND	\$msgDisallowed	is	false
AND	@msg.avp["Destination-Realm"]	equals	list of DRs
THEN	Set Internal Variable:	\$msgDisallowed = 0 for all the rules except the default rule: \$msgDisallowed = 100	

Settings		Description
Rule Template Name	Destination-Realm whitelist-RTP10	Name used to label this Rule Template in the system [Default = n/a. Range = A 255 character string. Valid characters are [a-z], [A-Z], [0-9], space, dash (-), period (.), @, and _]
Message type support	Request: <input checked="" type="checkbox"/> Answer: <input checked="" type="checkbox"/>	Indicates what type of message processing is supported by the Rule Template, i.e. Request, Answer, or both. The rule depends on the selected conditions and actions.
Conditions		
Fast search	A	When the condition set matches on the message, the selected actions are applied in the order they are shown. Each condition consists of a <left-hand operand> <operator> <right-hand operand> triple where <right-hand operand> is either a value provisioned by the Rule Set Administrator or a fixed value that comes for example from the message being processed. In the former case, "name" is shown on the provisioning screen instead of <left-hand operand> and the value is pre-filled by the "default value". "Optional" makes the condition optional, and "Fast search" results in fast database lookups.
Name	Check for Foreign Egress Peer	
Description	Check for Foreign Egress Peer	
Left value	\$foreignEgressPeer	[wizard]
Operator	is true	<input type="checkbox"/> Case sensitive <input type="checkbox"/>
Right value	Integer32	
Default value		[wizard]
Optional <input type="checkbox"/> Fixed <input type="checkbox"/>		
Fast search	B	
Name	Check for msgDisallow	
Description	Check for msgDisallow	
Left value	\$msgDisallow	[wizard]
Operator	is false	<input type="checkbox"/> Case sensitive <input type="checkbox"/>
Right value	Integer32	
Default value		[wizard]
Optional <input type="checkbox"/> Fixed <input type="checkbox"/>		
Fast search	C	
Name	Check for Destination-Realm AVP	
Description	Check for Destination-Realm AVP	
Left value	@msg.avp["Destination-Realm"][1].data	[wizard]
Operator	==	<input type="checkbox"/> Case sensitive <input type="checkbox"/>
Right value	DiameterIdentity	
Default value	fwhss1.com	[wizard]
Optional <input type="checkbox"/> Fixed <input type="checkbox"/>		
[Add]		
Condition Set	<input checked="" type="radio"/> ANDed <input type="radio"/> ORed <input type="radio"/> Complex Expression	A AND B AND C
Actions		
Fast search	A	When the condition set matches on the message, the selected actions are applied in the order they are shown. Each condition consists of a <left-hand operand> <operator> <right-hand operand> triple where <right-hand operand> is either a value provisioned by the Rule Set Administrator or a fixed value that comes for example from the message being processed. In the former case, "name" is shown on the provisioning screen instead of <left-hand operand> and the value is pre-filled by the "default value". "Optional" makes the condition optional, and "Fast search" results in fast database lookups.
Name	Check for Foreign Egress Peer	
Description	Check for Foreign Egress Peer	
Left value	\$foreignEgressPeer	[wizard]
Operator	is true	<input type="checkbox"/> Case sensitive <input type="checkbox"/>
Right value	Integer32	
Default value		[wizard]
Optional <input type="checkbox"/> Fixed <input type="checkbox"/>		
Fast search	B	
Name	Check for msgDisallow	
Description	Check for msgDisallow	
Left value	\$msgDisallow	[wizard]
Operator	is false	<input type="checkbox"/> Case sensitive <input type="checkbox"/>
Right value	Integer32	
Default value		[wizard]
Optional <input type="checkbox"/> Fixed <input type="checkbox"/>		
Fast search	C	
Name	Check for Destination-Realm AVP	
Description	Check for Destination-Realm AVP	
Left value	@msg.avp["Destination-Realm"][1].data	[wizard]
Operator	==	<input type="checkbox"/> Case sensitive <input type="checkbox"/>
Right value	DiameterIdentity	
Default value	fwhss1.com	[wizard]
Optional <input type="checkbox"/> Fixed <input type="checkbox"/>		
[Add]		
Condition Set	<input checked="" type="radio"/> ANDed <input type="radio"/> ORed <input type="radio"/> Complex Expression	A AND B AND C
Actions		
Action	Default Values	Optional
Set internal variable	Internal variable msgDisallow	<input type="checkbox"/> Set Value 0 [wizard]
New action	Modify Diameter Header Parts	[add]
Add a new action to the action list that is applied when the conditions of the Rule Template match on the message.		
<input type="button" value="Ok"/> <input type="button" value="Apply"/> <input type="button" value="Cancel"/>		

Figure 15: Screenshot of Destination-Realm Whitelist Configured Template

2.4.13 Template 12a: Remove DOIC AVP

This template's behavior is same as Template 9a, but association to trigger point is different and this works for egress peer.

It checks for DOIC AVP (OC-Supported-Features and OC-OLR AVPs). If it is present in the diameter message, then it deletes the AVPs and forwards the message for further processing.

It is associated with trigger point RTP10.

Template Definition

IF	\$foreignEgressPeer	is	true
AND	@msg.avp["OC-Supported-Features"]	exists	
OR	@msg.avp["OC-OLR"]	exists	
THEN	Delete AVP	OC-Supported-Features	
	Delete AVP	OC-OLR	

Main Menu: Diameter -> Mediation -> Rule Templates [Edit]

Sat Jan 07 02:

Settings		Description
Rule Template Name	Remove DOIC AVP-RT10	Name used to label this Rule Template in the system [Default = n/a. Range = A 255 character string. Valid characters are [a-z], [A-Z], [0-9], space, dash (-), period (.), @, and underscore (_)]
Message type support	Request <input checked="" type="checkbox"/> Answer <input checked="" type="checkbox"/>	Indicates what type of message processing is supported by the Rule Template, i.e. Request, Answer, or both. The message type support depends on the selected conditions.
Conditions		
Fast search	A	
Name	Check for Foreign Egress Peer	
Description	Check for Foreign Egress Peer	
Left value	\$foreignEgressPeer	
Operator	is true <input type="checkbox"/> Case sensitive <input type="checkbox"/>	
Right value	Integer32	
Default value		[wizard]
Fast search	B	
Name	Match for OC-Supported-Feature AVP	
Description	Match for OC-Supported-Feature AVP	
Left value	@msg.avp["OC-Supported-Features"][1].data	
Operator	exists <input type="checkbox"/> Case sensitive <input type="checkbox"/>	
Right value	Integer32	
Default value		[wizard]
Fast search	C	
Name	Match for OC-OLR AVP	
Description	Match for OC-OLR AVP	
Left value	@msg.avp["OC-OLR"][1].data	
Operator	exists <input type="checkbox"/> Case sensitive <input type="checkbox"/>	
Right value	Integer32	
Default value		[wizard]
Fast search	D	
Name	Match for OC-Supported-Feature AVP	
Description	Match for OC-Supported-Feature AVP	
Left value	@msg.avp["OC-Supported-Features"][1].data	
Operator	exists <input type="checkbox"/> Case sensitive <input type="checkbox"/>	
Right value	Integer32	
Default value		[wizard]
Fast search	E	
Name	Match for OC-OLR AVP	
Description	Match for OC-OLR AVP	
Left value	@msg.avp["OC-OLR"][1].data	
Operator	exists <input type="checkbox"/> Case sensitive <input type="checkbox"/>	
Right value	Integer32	
Default value		[wizard]
<input type="checkbox"/> ANDed <input type="checkbox"/> ORed <input checked="" type="checkbox"/> Complex Expression <input type="checkbox"/> AND (B OR C)		
Actions		
Action	Default Values	Description
Delete A/P	<input type="checkbox"/> Delete parent A/P if it is empty: <input type="checkbox"/> Instance OC-Supported-Features <input type="checkbox"/> \$index <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> OC-Feature-Vector <input type="checkbox"/> [Add] <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> With the value: <input type="checkbox"/> [wizard]	The action allows deleting a specified A/P in the message.
Delete A/P	<input type="checkbox"/> Delete parent A/P if it is empty: <input type="checkbox"/> Instance OC-OLR <input type="checkbox"/> \$index <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> OC-Reduction-Percentage <input type="checkbox"/> [Add] <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> With the value: <input type="checkbox"/> [wizard]	The action allows deleting a specified A/P in the message.
New action	<input type="checkbox"/> Modify Diameter Header Parts <input type="checkbox"/> [Add]	Add a new action to the action list that is applied when the conditions of the Rule Template match on the message.

Ok Apply Cancel

Figure 16: Screenshot of Remove DOIC AVP Configured Template

2.4.14 Template 12b: Remove DRMP AVP

This template behavior is same as template 9b but association to trigger point is different and this will work for egress peer.

It checks for DRMP AVP. If it is present in the diameter message, then it deletes the DFRMP AVP and forwards the message for further processing.

It is associated with trigger point RTP10.

Template Definition

IF \$foreignEgressPeer is true
 AND @msg.avp["DRMP"] exists
 THEN Delete AVP DRMP

Settings		Description	
Rule Template Name	Remove DRMP AVP-RTP10	Name used to label this Rule Template in the system [Default = n/a. Range = A 255 character string. Valid characters are [a-zA-Z], [0-9], space, dash (-), period (.), @, and underscore (_)]	
Message type support	Request: <input checked="" type="checkbox"/> Answer: <input checked="" type="checkbox"/>	Indicates what type of message processing is supported by the Rule Template, i.e. Request, Answer, or both. The message type support depends on the selected actions.	
Conditions			
Fast search	<input checked="" type="checkbox"/> A	Check for Foreign Egress Peer Description: Check for Foreign Egress Peer Left value: \$foreignEgressPeer Operator: is true Right value: Integer32 Default value: [wizard]	
Fast search	<input checked="" type="checkbox"/> B	Check for DRMP AVP Description: Check for DRMP AVP Left value: @msg.avp["DRMP"] [1].data Operator: exists Right value: Integer32 Default value: [wizard]	
Condition Set	<input checked="" type="radio"/> ANDed <input type="radio"/> ORed <input type="radio"/> Complex Expression: A AND B		
Actions		Description	
Action	Default Values	Optional	
Delete AVP	Delete parent AVP if it is empty: <input type="checkbox"/> Instance: DRMP All <input type="checkbox"/> With the value: [wizard]	The action allows deleting a specified AVP in the message.	
New action	Modify Diameter Header Parts	[add]	
<input type="button" value="Ok"/> <input type="button" value="Apply"/> <input type="button" value="Cancel"/>			

Figure 17: Screenshot of Configured Template

2.5 Insert Rules within a Rule Set

Insert rules within each rule set according to configuration. The condition value within each rule can be customized according to requirements.

In this sample application testing, templates are created (see screenshots of each of the Templates in Figure 4 through Figure 17) and rules are added accordingly in each template.

To insert a rule into the rule set:

1. Navigate to **Main Menu -> Diameter -> Mediation -> Rule Sets**.
2. Select a rule set and click Insert.

The following screenshots display each rule set with rules that can be used as a reference.

Main Menu: Diameter -> Mediation -> Rule Sets -> Roaming scenario identification-RTP1

Display Filter: - None -

IF A
THEN Set internal variable, Set internal variable, Set internal variable

Displaying Records 1-4 of 4 | First | Prev | 1 | Next | Last | Restore Order

Rule Id	Set internal variable		Set internal variable		Set internal variable	
	Identifying the Ingress peer	Internal variable	Set Value	Internal variable	Set Value	Internal variable
48 FN_HSS1	foreignIngressPeer	1	outboundRoaming (@msg.avp["User-Name"])[1].imsi.mccmnc==40417)	inboundRoaming (\$outboundRoaming==0)	inboundRoaming	(\$outboundRoaming==0)
49 FN_HSS2	foreignIngressPeer	1	outboundRoaming (@msg.avp["User-Name"])[1].imsi.mccmnc==40417)	inboundRoaming (\$outboundRoaming==0)	inboundRoaming	(\$outboundRoaming==0)
46 FN_MME1	foreignIngressPeer	1	outboundRoaming (@msg.avp["User-Name"])[1].imsi.mccmnc==40417)	inboundRoaming (\$outboundRoaming==0)	inboundRoaming	(\$outboundRoaming==0)
47 FN_MME2	foreignIngressPeer	1	outboundRoaming (@msg.avp["User-Name"])[1].imsi.mccmnc==40417)	inboundRoaming (\$outboundRoaming==0)	inboundRoaming	(\$outboundRoaming==0)

Displaying Records 1-4 of 4 | First | Prev | 1 | Next | Last | Restore Order

Pause Updates

Figure 18: Template 1: Roaming Scenario Identification

IF A AND B AND C AND D
THEN Set internal variable

Displaying Records 1-6 of 6 | First | Prev | 1 | Next | Last | Restore Order

Rule Id	A	B	C	D	Set internal variable	
	Check for InboundRoamers	Check for msgDisallowed	Check for ApplicationId	Check for CommandCode	Internal variable	Set Value
169	IS TRUE	IS FALSE	16777251	317	msgDisallowed	0
170	IS TRUE	IS FALSE	16777251	319	msgDisallowed	0
171	IS TRUE	IS FALSE	16777251	320	msgDisallowed	0
172	IS TRUE	IS FALSE	16777251	322	msgDisallowed	0
173	IS TRUE	IS FALSE	16777252		msgDisallowed	0
174	IS TRUE	IS FALSE			msgDisallowed	10

Displaying Records 1-6 of 6 | First | Prev | 1 | Next | Last | Restore Order

Figure 19: Template 2: Application ID and CC Whitelist for Inbound Roamers

Displaying Records 1-6 of 6 | First | Prev | 1 | Next | Last | Restore Order

Rule Id	A	B	C	D	Set internal variable	
	Check for Outbound Roamers	Check for msgDisallowed	Check for ApplicationId	Check for Commandcode	Internal variable	Set Value
175	IS TRUE	IS FALSE	16777251	316	msgDisallowed	0
176	IS TRUE	IS FALSE	16777251	318	msgDisallowed	0
177	IS TRUE	IS FALSE	16777251	321	msgDisallowed	0
178	IS TRUE	IS FALSE	16777251	323	msgDisallowed	0
179	IS TRUE	IS FALSE	16777252		msgDisallowed	0
180	IS TRUE	IS FALSE			msgDisallowed	20

Displaying Records 1-6 of 6 | First | Prev | 1 | Next | Last | Restore Order

Figure 20: Template 3: Application ID and CC Whitelist for Outbound Roamers

IF A AND B AND C
THEN Set internal variable

Displaying Records 1-5 of 5 | First | Prev | 1 | Next | Last | Restore Order

Rule Id	A	B	C	Set internal variable	
	Check for Foreign Ingress Peer	Check for msgDisallowed	Check for Origin Realm AVP	Internal variable	Set Value
183	IS TRUE	IS FALSE	fwhss1.com	msgDisallowed	0
184	IS TRUE	IS FALSE	fwhss2.com	msgDisallowed	0
181	IS TRUE	IS FALSE	fwmme1.com	msgDisallowed	0
182	IS TRUE	IS FALSE	fwmme2.com	msgDisallowed	0
185	IS TRUE	IS FALSE		msgDisallowed	30

Displaying Records 1-5 of 5 | First | Prev | 1 | Next | Last | Restore Order

Figure 21: Template 4: OR Whitelist

IF A AND B AND C
THEN Set internal variable

Displaying Records 1-5 of 5 | First | Prev | 1 | Next | Last | Restore Order

Rule Id	A	B	C	Set internal variable	
	Check for Foreign Ingress Peer	Check for msgDisallowed	Check for Destination-Realm AVP	Internal variable	Set Value
188	IS TRUE	IS FALSE	hohss1.com	msgDisallowed	0
189	IS TRUE	IS FALSE	hohss2.com	msgDisallowed	0
186	IS TRUE	IS FALSE	homme1.com	msgDisallowed	0
187	IS TRUE	IS FALSE	homme2.com	msgDisallowed	0
190	IS TRUE	IS FALSE		msgDisallowed	40

Displaying Records 1-5 of 5 | First | Prev | 1 | Next | Last | Restore Order

Figure 22: Template 5: DR Whitelist

THEN Set internal variable

Displaying Records 1-1 of 1 | First | Prev | 1 | Next | Last | Restore Order

Rule Id	A	B	C	Set internal variable	
	Check for Foreign Ingress Peer	Check for msgDisallowed	Check for Origin-Host AVP	Internal variable	Set Value
211	IS TRUE	IS FALSE	":" + @msg.avp["Origin-Realm"]	msgDisallowed	50

Displaying Records 1-1 of 1 | First | Prev | 1 | Next | Last | Restore Order

Figure 23: Template 6: OH Ends with OR

THEN Set internal variable

Displaying Records 1-2 of 2 | First | Prev | 1 | Next | Last | Restore Order

Rule Id	Move the rule	A		B		C		Set internal variable		Move the rule
		Check for Foreign Ingress Peer	Check for msgDisallowed	Check for RouteRecord AVP	Internal variable	Set Value				
148	Down	IS TRUE	IS FALSE	blistmme2.com	msgDisallowed	60			Down	
147	Up	IS TRUE	IS FALSE	blistmme1.com	msgDisallowed	60	Up	Down		

Displaying Records 1-2 of 2 | First | Prev | 1 | Next | Last | Restore Order

Figure 24: Template 7: Handle RouteRecord AVP

IF A
THEN Assert Alarm/Event, Peg Counter, Abandon Message, Exit from Execution Trigger

Displaying Records 1-7 of 7 | First | Prev | 1 | Next | Last | Restore Order

Rule Id	A		Assert Alarm/Event			Measurement
	Check for msgDisallowed	Alarm/Event	Additional info			
213	10	Mediation Generic Alarm -- Major	T" + "Error Code :." + String(\$msgDisallow) + ":" + "Error Description :." + "Application Id and CC white list for inbound roamers check failed. Abandoned the message"			measurement_inbound_10
219	100	Mediation Generic Alarm -- Major	T" + "Error Code :." + String(\$msgDisallow) + ":" + "Error Description :." + "Destination-Realm whitelist check failed. Abandoned the message"			measurement_DestRealm_ER_100
214	20	Mediation Generic Alarm -- Major	T" + "Error Code :." + String(\$msgDisallow) + ":" + "Error Description :." + "Application Id and CC white list for outbound roamers check failed. Abandoned the message"			measurement_outbound_20
215	30	Mediation Generic Alarm -- Major	T" + "Error Code :." + String(\$msgDisallow) + ":" + "Error Description :." + "OR whitelist check failed. Abandoned the message"			measurement_ORWhitelist_30
216	40	Mediation Generic Alarm -- Major	T" + "Error Code :." + String(\$msgDisallow) + ":" + "Error Description :." + "DR whitelist check failed. Abandoned the message"			measurement_DRWhitelist_40
217	50	Mediation Generic Alarm -- Major	T" + "Error Code :." + String(\$msgDisallow) + ":" + "Error Description :." + "OH ends with OR check failed. Abandoned the message"			measurement_OH_ends_with_OR_50
218	60	Mediation Generic Alarm -- Major	T" + "Error Code :." + String(\$msgDisallow) + ":" + "Error Description :." + "Handle RouteRecord AVP check failed. Abandoned the message"			measurement_Handle_RRecordAVP_60

Displaying Records 1-7 of 7 | First | Prev | 1 | Next | Last | Restore Order

Pause Updates

Figure 25: Template 8: Handle Disallowed Requests

Displaying Records 1-1 of 1 | First | Prev | 1 | Next | Last | Restore Order

Rule Id	Move the rule	A		B	C	Delete AVP	Delete AVP	Move the rule
		Check for foreignIngressPeer	Check for AVP OC-Supported-Features	Check for OC-OLR AVP				
192		IS TRUE	EXISTS	EXISTS	OC-Supported-Features[\$index]	OC-OLR[\$index]		

Displaying Records 1-1 of 1 | First | Prev | 1 | Next | Last | Restore Order

Figure 26: Template 9a: Remove DOIC AVP

THEN Delete AVP

Displaying Records 1-1 of 1 | First | Prev | 1 | Next | Last | Restore Order

Rule Id	A		B	Delete AVP	Rule Counters	
	Check for Foreign Ingress Peer	Check for DRMP AVP	Exists		Total Pegs	
193	IS TRUE		EXISTS	DRMP[0]	0	

Displaying Records 1-1 of 1 | First | Prev | 1 | Next | Last | Restore Order

Figure 27: Template 9b: Remove DRMP AVP

THEN Set internal variable

Displaying Records 1-4 of 4 | First | Prev | 1 | Next | Last | Restore Order

Rule Id	A		B	C	Set internal variable		Rule Counters	
	Identifying the Egress peer	Check for Application ID	Check for Command code	Internal variable	Set Value	Total Pegs		
74	FN_HSS1	16777251	316	foreignEgressPeer	1	0		
76	FN_HSS1	16777251	318	foreignEgressPeer	1	0		
77	FN_HSS2	16777251	316	foreignEgressPeer	1	0		
75	FN_HSS2	16777251	318	foreignEgressPeer	1	0		

Displaying Records 1-4 of 4 | First | Prev | 1 | Next | Last | Restore Order

Pause Updates

Figure 28: Template 10. Roaming Scenario Identification

IF A AND B AND C
THEN Set internal variable

Displaying Records 1-3 of 3 | First | Prev | 1 | Next | Last | Restore Order

Rule Id	A	B	C	Set internal variable	
	Check for Foreign Egress Peer	Check for msgDisallow	Check for Destination-Realm AVP	Internal variable	Set Value
195	IS TRUE	IS FALSE	fwhss1.com	msgDisallow	0
196	IS TRUE	IS FALSE	fwhss2.com	msgDisallow	0
197	IS TRUE	IS FALSE		msgDisallow	100

Displaying Records 1-3 of 3 | First | Prev | 1 | Next | Last | Restore Order

Figure 29: Template 11. Destination-Realm Whitelist

IF A AND (B OR C)
THEN Delete AVP,Delete AVP

Displaying Records 1-1 of 1 | First | Prev | 1 | Next | Last | Restore Order

Rule Id	Move the rule	A	B	C	Delete AVP	Delete AVP	Move the rule
		Check for Foreign Egress Peer	Match for OC-Supported-Feature AVP	Match for OC-OLR AVP			
194		IS TRUE	EXISTS	EXISTS	OC-Supported-Features[\$index]	OC-OLR[\$index]	

Displaying Records 1-1 of 1 | First | Prev | 1 | Next | Last | Restore Order

Figure 30: Template 12a. Remove DOIC AVP

IF A AND B
THEN Delete AVP

Displaying Records 1-1 of 1 | First | Prev | 1 | Next | Last | Restore Order

Rule Id	A	B	Delete AVP
	Check for Foreign Egress Peer	Check for DRMP AVP	
198	IS TRUE	EXISTS	DRMP[0]

Displaying Records 1-1 of 1 | First | Prev | 1 | Next | Last | Restore Order

Figure 31: Template 12b. Remove DRMP AVP

2.6 State and Properties of Ruleset

After injecting rules within a rule set, change the state of the template to Active.

1. Navigate to **Main Menu -> Diameter -> Mediation -> State & Properties**.
2. Select a template and click **Edit**.
3. Change the State to **Active**.
4. You can change the Action Error Handling: Ignore the error depending on your requirements.
5. You can change the Status of Rule Counters: Checked. If checked, then you can see the peg counter for each rule.

Main Menu: Diameter -> Mediation -> State & Properties

<input type="button" value="Display Filter: - None -"/> <input type="button" value=""/> <input type="button" value=""/> <input type="button" value="Reset"/> <input type="button" value="Go"/>				
Displaying Records 1-20 of 35 First Prev 1 2 Next Last				
Rule Template Name	State	Action Error Handling	Status of Rule Counters	
Application Id and CC white list for inbound roammers-RTP1	Test	Ignore the error	Stopped	
Application Id and CC white list for inbound roammers-RTP1-First Ver	Active	Ignore the error	Active	
Application Id and CC white list for outbound roammers-RTP1	Test	Ignore the error	Stopped	
Application Id and CC white list for outbound roammers-RTP1-First Ver	Active	Ignore the error	Active	
DR whitelist-RTP1	Test	Ignore the error	Stopped	
DR whitelist-RTP1-First Ver	Active	Ignore the error	Active	
Destination-Realm whitelist-RTP10	Test	Ignore the error	Stopped	
Destination-Realm whitelist-RTP10-First Ver	Active	Ignore the error	Active	
Handle RouteRecord A/P	Test	Ignore the error	Stopped	
Handle RouteRecord A/P-First Ver	Active	Ignore the error	Active	
Handle disallowed requests	Test	Ignore the error	Stopped	
Handle disallowed requests-First Ver	Active	Ignore the error	Active	
Handle disallowed requests-RTP1-copy	Test	Ignore the error	Active	
MiklosTest1	Development	Ignore the error	Stopped	
MiklosTest1-copy	Development	Ignore the error	Stopped	
MiklosTest11	Development	Ignore the error	Stopped	
OH ends with OR-RTP1	Test	Ignore the error	Stopped	
OH ends with OR-RTP1-First Ver	Active	Ignore the error	Active	
OR whitelist-RTP1	Test	Ignore the error	Stopped	
OR whitelist-RTP1-First Ver	Active	Ignore the error	Active	
Rule Template Name	State	Action Error Handling	Status of Rule Counters	
Remove DOIC A/P-RTP1	Test	Ignore the error	Stopped	
Remove DOIC A/P-RTP1-First Ver	Active	Ignore the error	Active	
Remove DOIC A/P-RTP10	Test	Ignore the error	Stopped	
Remove DOIC A/P-RTP10-First Ver	Active	Ignore the error	Active	
Remove DRMP A/P-RTP1	Test	Ignore the error	Stopped	
Remove DRMP A/P-RTP1-First Ver	Active	Ignore the error	Active	
Remove DRMP A/P-RTP10	Test	Ignore the error	Stopped	
Remove DRMP A/P-RTP10-First Ver	Active	Ignore the error	Active	
Roaming scenario identification-RTP1	Test	Ignore the error	Stopped	
Roaming scenario identification-RTP1-First Ver	Active	Ignore the error	Active	
Roaming scenario identification-RTP10	Test	Ignore the error	Stopped	
Roaming scenario identification-RTP10-First Ver	Active	Ignore the error	Active	
set extra logs	Test	Ignore the error	Stopped	
testGC	Test	Ignore the error	Stopped	
try4	Test	Ignore the error	Stopped	

Displaying Records 21-35 of 35 | [First](#) | [Prev](#) | [1](#) | [2](#) | [Next](#) | [Last](#)

Figure 32: Active Templates Used as Reference

2.7 Association of Ruleset to a Trigger Point

This procedure associates the templates to a trigger point.

Associate Template 1 to Template 9b on trigger point RTP1 in increasing order. Associate Template 10, Template 11, Template 8, Template 12a, and Template 12b on trigger point RTP 10 in given sequence.

Associate Template 12a and 12b for the answer message on trigger point ATP10.

Main Menu: Diameter -> Mediation -> Triggers

The screenshot shows a software interface for managing Diameter triggers. At the top, there is a toolbar with a 'Display Filter' dropdown set to '- None -', a search bar, a 'Reset' button, and an 'OK' button. Below the toolbar is a table with columns: 'Rule Set Name', 'Live', 'DSR Application', 'Request', and 'Scope'. The table is divided into sections by header rows. The first section is 'Trigger: Diameter request message received from connection'. It contains 10 rows, each with a checked 'Live' column and a 'Normal Request' column. The second section is 'Trigger: Diameter request message prior to be forwarded to connection'. It also contains 10 rows with similar settings. Below these are three empty sections: 'Trigger: Diameter request message attempted for reroute', 'Trigger: Diameter answer message received from connection', and 'Trigger: Diameter answer message prior to be forwarded to connection'. Each of these sections has an 'Insert' button and 'Remove', 'Up', 'Down' buttons.

Rule Set Name	Live	DSR Application	Request	Scope
Trigger: Diameter request message received from connection				
Roaming scenario identification-RTP1-First Ver	✓		Normal Request	- All -
Application Id and CC white list for inbound roamers-RTP1-First Ver	✓		Normal Request	- All -
Application Id and CC white list for outbound roamers-RTP1-First Ver	✓		Normal Request	- All -
OR whitelist-RTP1-First Ver	✓		Normal Request	- All -
DR whitelist-RTP1-First Ver	✓		Normal Request	- All -
OH ends with OR-RTP1-First Ver	✓		Normal Request	- All -
Handle RouteRecord A/P-First Ver	✓		Normal Request	- All -
Handle disallowed requests-First Ver	✓		Normal Request	- All -
Remove DOIc A/P-RTP1-First Ver	✓		Normal Request	- All -
Remove DRMP A/P-RTP1-First Ver	✓		Normal Request	- All -
Trigger: Diameter request message prior to be forwarded to connection				
Roaming scenario identification-RTP10-First Ver	✓		Normal Request	- All -
Destination-Realm whitelist-RTP10-First Ver	✓		Normal Request	- All -
Handle disallowed requests-First Ver	✓		Normal Request	- All -
Remove DOIc A/P-RTP10-First Ver	✓		Normal Request	- All -
Remove DRMP A/P-RTP10-First Ver	✓		Normal Request	- All -
Trigger: Diameter request message attempted for reroute				
Trigger: Diameter answer message received from connection				
Trigger: Diameter answer message prior to be forwarded to connection				
Remove DOIc A/P-RTP10-First Ver	✓			- All -
Remove DRMP A/P-RTP10-First Ver	✓			- All -

Figure 33: Screenshot of Rule Set Attached to its Trigger Points