

Oracle® Retail Service Backbone

Installation Guide

Release 14.0

E49318-01

December 2013

Primary Author: Gloreen Soans

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

Value-Added Reseller (VAR) Language

Oracle Retail VAR Applications

The following restrictions and provisions only apply to the programs referred to in this section and licensed to you. You acknowledge that the programs may contain third party software (VAR applications) licensed to Oracle. Depending upon your product and its version number, the VAR applications may include:

- (i) the **MicroStrategy** Components developed and licensed by MicroStrategy Services Corporation (MicroStrategy) of McLean, Virginia to Oracle and imbedded in the MicroStrategy for Oracle Retail Data Warehouse and MicroStrategy for Oracle Retail Planning & Optimization applications.
- (ii) the **Wavelink** component developed and licensed by Wavelink Corporation (Wavelink) of Kirkland, Washington, to Oracle and imbedded in Oracle Retail Mobile Store Inventory Management.
- (iii) the software component known as **Access Via**[™] licensed by Access Via of Seattle, Washington, and imbedded in Oracle Retail Signs and Oracle Retail Labels and Tags.
- (iv) the software component known as **Adobe Flex**[™] licensed by Adobe Systems Incorporated of San Jose, California, and imbedded in Oracle Retail Promotion Planning & Optimization application.

You acknowledge and confirm that Oracle grants you use of only the object code of the VAR Applications. Oracle will not deliver source code to the VAR Applications to you. Notwithstanding any other term or condition of the agreement and this ordering document, you shall not cause or permit alteration of any VAR Applications. For purposes of this section, "alteration" refers to all alterations, translations, upgrades, enhancements, customizations or modifications of all or any portion of the VAR Applications including all reconfigurations, reassembly or reverse assembly, re-engineering or reverse engineering and recompilations or reverse compilations of the VAR Applications or any derivatives of the VAR Applications. You

acknowledge that it shall be a breach of the agreement to utilize the relationship, and/or confidential information of the VAR Applications for purposes of competitive discovery.

The VAR Applications contain trade secrets of Oracle and Oracle's licensors and Customer shall not attempt, cause, or permit the alteration, decompilation, reverse engineering, disassembly or other reduction of the VAR Applications to a human perceivable form. Oracle reserves the right to replace, with functional equivalent software, any of the VAR Applications in future releases of the applicable program.

Contents

Send Us Your Comments	vii
Preface	ix
Audience	ix
Documentation Accessibility	ix
Related Documents	ix
Customer Support	x
Review Patch Documentation	x
Improved Process for Oracle Retail Documentation Corrections	x
Oracle Retail Documentation on the Oracle Technology Network	x
Conventions	xi
1 Introduction	
2 RSB Installation Master Checklist	
RSB Installation Master Checklist	2-1
3 Technical Specifications	
Server Requirements	3-1
Additional Requirement for Retail Integration Console (RIC)	3-2
Supported Oracle Retail Products	3-3
The RSB and Oracle WebLogic Server Cluster	3-3
4 Preinstallation Tasks	
Prepare WebLogic Application Server	4-1
Steps for Configuring OSB Domain	4-1
HTTPS Configuration for WebLogic Server	4-11
5 Database Installation Tasks	
Repository Creation Utility	5-1
Steps for Installation of Database Schema using RCU	5-1
6 RSB Installation	
Steps to Install RSB	6-1
Download	6-1
Configuration	6-2
Compilation	6-5
Deployment	6-6

7	Install JSIT	
	Download and Prepare SIT	7-1
	Deploy javaee-service-interface-tester.ear to Glassfish	7-1
	Deploy SIT to WebLogic 12c	7-1
	Verify JSIT	7-2
8	Post Installation Tasks	
	Verification using RSB Admin	8-1
	Common Issues.....	8-1
A	Appendix: RSB Installation Checklist	
B	Appendix: How to Secure Application Service (including JSIT)	
C	Appendix: Installation Order	
	Enterprise Installation Order	C-1

Send Us Your Comments

Oracle® Retail Service Backbone Installation Guide, Release 14.0.

Oracle welcomes customers' comments and suggestions on the quality and usefulness of this document.

Your feedback is important, and helps us to best meet your needs as a user of our products. For example:

- Are the implementation steps correct and complete?
- Did you understand the context of the procedures?
- Did you find any errors in the information?
- Does the structure of the information help you with your tasks?
- Do you need different information or graphics? If so, where, and in what format?
- Are the examples correct? Do you need more examples?

If you find any errors or have any other suggestions for improvement, then please tell us your name, the name of the company who has licensed our products, the title and part number of the documentation and the chapter, section, and page number (if available).

Note: Before sending us your comments, you might like to check that you have the latest version of the document and if any concerns are already addressed. To do this, access the Online Documentation available on the Oracle Technology Network Web site. It contains the most current Documentation Library plus all documents revised or released recently.

Send your comments to us using the electronic mail address: retail-doc_us@oracle.com

Please give your name, address, electronic mail address, and telephone number (optional).

If you need assistance with Oracle software, then please contact your support representative or Oracle Support Services.

If you require training or instruction in using Oracle software, then please contact your Oracle local office and inquire about our Oracle University offerings. A list of Oracle offices is available on our Web site at <http://www.oracle.com>.

Preface

The Oracle® Retail Service Backbone Installation Guide contains the requirements and procedures that are necessary for the retailer to install Oracle Retail Service Backbone product.

Audience

The Installation Guide is written for the following audiences:

- Database administrators (DBA)
- System analysts and designers
- Integrators and implementation staff

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Access to Oracle Support

Oracle customers have access to electronic support through My Oracle Support. For information, visit

<http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

Related Documents

For more information, see the following documents in the Oracle Retail Service Backbone Release 14.0 documentation set:

- *Oracle® Retail Service Backbone Developers Guide*
- *Oracle® Retail Service Backbone Security Guide*
- *Oracle® Retail Service Backbone Implementation Guide*
- *Oracle® Retail Service Backbone Release Notes*
- *Oracle® Retail Integration Console (RIC) Guide*

Customer Support

To contact Oracle Customer Support, access My Oracle Support at the following URL:

<https://support.oracle.com>

When contacting Customer Support, please provide the following:

- Product version and program/module name
- Functional and technical description of the problem (include business impact)
- Detailed step-by-step instructions to re-create
- Exact error message received
- Screen shots of each step you take

Review Patch Documentation

When you install the application for the first time, you install either a base release (for example, 14.0) or a later patch release. If you are installing the base release, additional patch, and bundled hot fix releases, read the documentation for all releases that have occurred since the base release before you begin installation. Documentation for patch and bundled hot fix releases can contain critical information related to the base release, as well as information about code changes since the base release.

Improved Process for Oracle Retail Documentation Corrections

To more quickly address critical corrections to Oracle Retail documentation content, Oracle Retail documentation may be republished whenever a critical correction is needed. For critical corrections, the republication of an Oracle Retail document may at times not be attached to a numbered software release; instead, the Oracle Retail document will simply be replaced on the Oracle Technology Network Web site, or, in the case of Data Models, to the applicable My Oracle Support Documentation container where they reside.

This process will prevent delays in making critical corrections available to customers. For the customer, it means that before you begin installation, you must verify that you have the most recent version of the Oracle Retail documentation set. Oracle Retail documentation is available on the Oracle Technology Network at the following URL:

<http://www.oracle.com/technetwork/documentation/oracle-retail-100266.html>

An updated version of the applicable Oracle Retail document is indicated by Oracle part number, as well as print date (month and year). An updated version uses the same part number, with a higher-numbered suffix. For example, part number E123456-02 is an updated version of a document with part number E123456-01.

If a more recent version of a document is available, that version supersedes all previous versions.

Oracle Retail Documentation on the Oracle Technology Network

Documentation is packaged with each Oracle Retail product release. Oracle Retail product documentation is also available on the following Web site:

<http://www.oracle.com/technetwork/documentation/oracle-retail-100266.html>

(Data Model documents are not available through Oracle Technology Network. These documents are packaged with released code, or you can obtain them through My Oracle Support.)

Documentation should be available on this Web site within a month after a product release.

Conventions

The following text conventions are used in this document:

Convention	Meaning
boldface	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
<code>monospace</code>	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

Introduction

This document is the installation guide for the Retail Service Backbone (RSB) product. Generally, an RSB installation contains the following components:

- An installation of RSB's Decorator Services on Java EE 7 compliant application server.
- An installation of the Retail Integration Console (RIC).
- (Optional) Installation of the Java Service Interface Tester tool (JSIT)

It is important to also follow all installation steps of the Oracle Retail Applications that are being connected to the RSB. Failure to follow these may result in a faulty RSB installation. See the installation guides for the relevant Oracle Retail applications for more information.

Note: The instructions provided in this guide apply to a full installation of the RSB 14.0.0

RSB Installation Master Checklist

RSB Installation Master Checklist

This list covers all of the sequential steps required to perform a full installation of the RSB using a command line installation.

Task	Notes
Install JDK 1.7	Prerequisite
Prepare the Oracle Database schemas that the RIB will use: <ul style="list-style-type: none"> ■ Install Repository Creation Utility (RCU) 11.1.1.6 ■ Create DB schema for OSB using RCU 	Prerequisite
Prepare the Oracle WebLogic Servers for installation of the RSB Components: <ul style="list-style-type: none"> ■ Install Oracle Service Bus (OSB) on WebLogic ■ Configure OSB domain and ADF runtime (Oracle JRF-11.1.1.0) ■ Configure OSB OWSM Extension-11.1.1.6 ■ Create Cluster 	Prerequisite
WLS 10.3.6 patches for RSB	Check for patch information
Install Retail Integration Bus (RIB) (Optional)	Prerequisite. A valid RIB home is required for the deployment of RSB, if RIB is enabled.
Verify that the applications to which RSB will be integrating are configured appropriately	
Gather information for the installation (URLs, credentials, path information etc)	During the prerequisites steps, there is information that should be noted that will be used to configure the RSB during the installation process.
Install using the RSB command line tools.	

Technical Specifications

RSB has several dependencies on Oracle Retail Application installations, as well as on the Oracle WebLogic servers. This section covers these requirements.

Server Requirements

Supported On	Versions Supported
Database Server OS	<p>OS certified with Oracle Database 11gR2 Enterprise Edition. Options are:</p> <ul style="list-style-type: none"> ▪ Oracle Linux 6 for x86-64 (Actual hardware or Oracle virtual machine). ▪ Red Hat Enterprise Linux 6 for x86-64 (actual hardware or Oracle virtual machine) ▪ IBM AIX 7.1 (actual hardware or LPARs) ▪ Solaris 11 Sparc (actual hardware or logical domains)
Database Server 11gR2	<p>Oracle Database Enterprise Edition 11gR2 (11.2.0.3) with the following specifications:</p> <p>Components:</p> <ul style="list-style-type: none"> ▪ Oracle Partitioning ▪ Examples CD (formerly the companion CD) <p>Oneoff Patches</p> <ul style="list-style-type: none"> ▪ 13036331: ORA-01031 INSUFFICIENT PRIVILEGES WHEN GRANTING EXECUTE ON DBMS PACKAGES. <p>Other Components:</p> <ul style="list-style-type: none"> ▪ Perl Compiler 5.0 or later ▪ X-Windows interface

Application Server OS	OS certified with Oracle Fusion Middleware 11g Release 1 (11.1.1.6). Options are: <ul style="list-style-type: none">■ Oracle Linux 6 for x86-64 (Actual hardware or Oracle virtual machine).■ Red Hat Enterprise Linux 6 for x86-64 (actual hardware or Oracle virtual machine)■ IBM AIX 7.1 (actual hardware or LPARs)■ Solaris 11 Sparc (actual hardware or logical domains)
Application Server	Oracle Fusion Middleware 11g Release 1 (11.1.1.6) Components: <ul style="list-style-type: none">■ Oracle WebLogic Server 11g Release 1 (10.3.6)■ Java: JDK 1.7.0+ 64 bit
Minimum required JAVA version for all operating systems	JDK 1.7.0+ 64 bit

Important

If there is an existing WebLogic installation on the server, you must upgrade to WebLogic 10.3.6. All middleware components associated with WebLogic server should be upgraded to 11.1.1.6.

Back up the `weblogic.policy` file (`$WLS_HOME/wlserver_10.3/server/lib`) before upgrading your WebLogic server, because this file could be overwritten. Restore the `weblogic.policy` from backup file after the WebLogic upgrade is finished and the post patching installation steps are completed.

Additional Requirement for Retail Integration Console (RIC)

The RIC model and view components require ADF runtime to run properly. Verify that ADF runtime 11.1.1.6 or higher is available in the WebLogic Application Server (10.3.6) and applied to the domain where RIC will be installed.

Other Resources

For information about WebLogic Application Server 11g, see the Oracle WebLogic Server Documentation Library.

- WebLogic Application Server 11g - Index
http://download.oracle.com/docs/cd/E15523_01/index.htm
- WebLogic Application Server 11g - Documents
http://download.oracle.com/docs/cd/E15523_01/wls.htm.

Note: See also the Oracle Database Administrator's Guide 11g Release 2 (11.2) and the Oracle WebLogic Application Server 11g (10.3.6) documentation.

Supported Oracle Retail Products

Retail Product	Version Supported
Oracle Retail Warehouse Management System (RWMS) 14.0.0	RIB 14.0.0
Oracle Retail Merchandising System (RMS) 14.0.0	RIB 14.0.0
Oracle Retail Price Management (RPM) 14.0.0	RIB 14.0.0
Oracle Retail Store Inventory Management (SIM) 14.0.0	RIB 14.0.0
Oracle Retail Advanced Inventory Planning (AIP) 14.0.0	RIB 14.0.0
Integration Gateway Services (IGS) 14.0.0	RSB 14.0.0
Oracle Retail Financial Integration (ORFI) 14.0.0	RSB 14.0.0
Oracle Retail Returns Management (RM) 14.0.0	RSB 14.0.0
Oracle Retail Invoice Matching (ReIM) 14.0.0	RSB 14.0.0
POS Suite 14.0.0	RSB 14.0.0
Rib4OMS 14.0.0	RSB 14.0.0

The RSB and Oracle WebLogic Server Cluster

Oracle Service Bus (OSB) supports three types of topologies: Admin-only topology, Admin + Managed Server topology and Cluster topology. The first two topologies are non-clustered topologies which are not high-available; therefore it is recommended that you use Cluster topology.

Clustering allows OSB to run on a group of servers that can be managed as a single unit. An OSB deployment can use clustering and load balancing to improve scalability by distributing the workload across nodes. A WebLogic server clustered domain consists of only one Admin Server, and one or more managed servers. The managed servers in an OSB domain can be grouped in a cluster. When OSB resources are configured, resources are targeted to the named cluster. The advantage of specifying a cluster as the target for resource deployment is that it makes it possible to dynamically increase capacity by adding Managed Servers to the cluster.

Singleton Resources

While most resources used by OSB are deployed homogeneously across the cluster, there are a few resources that must be pinned to a single Managed Server in order to operate correctly. The following table lists these components:

- ALSB Cluster Singleton Marker Application
- ALSB Domain Singleton Marker Application
- Message Reporting Purger
- configwiz-jms service

Load balancing in an OSB cluster

Load balancing distributes the workload proportionately across all the servers in a cluster so that each server can run at full capacity. Web services (SOAP or XML over HTTP) can use HTTP load balancing. External load balancing can be accomplished through the WebLogic HttpClusterServlet, a WebServer plug-in or a hardware router. In the steps described in this document, it uses a HTTP proxy server which is a managed server in the same domain and is not a part of the cluster.

Preinstallation Tasks

Before you begin installation, check to be sure that you have the most recent version of this installation guide. Oracle Retail installation guides are available on the Oracle Technology Network.

Prepare WebLogic Application Server

Oracle Service Bus (OSB) supports 3 types of topologies: Admin-only, Admin + Managed Server and Cluster. The first two topologies are non-clustered topologies which are not high-available, therefore we recommend using Cluster topology and this document describes how to configure a sample cluster topology for OSB applications.


Steps for Configuring OSB Domain

This section describes step-by-step process of creating and configuring an OSB domain using the configuration wizard. In this configuration, there are following servers:


- One Admin Server
- Three Managed Servers: *rsb_server1*, *rsb_server2* and *rsb_http_proxy*.
- Cluster: The cluster consists of *rsb_server1* and *rsb_server2* as managed servers. OSB features are deployed on this cluster. Also, *rsb_server1* hosts the singleton resources of OSB.
- Managed server *rsb_http_proxy* acts as the proxy server of the cluster. It does not have OSB code installed on it.

Perform the following steps to create a new WebLogic domain:

1. Run `<WLS_HOME>/wlserver_10.3/common/bin/config.sh`.

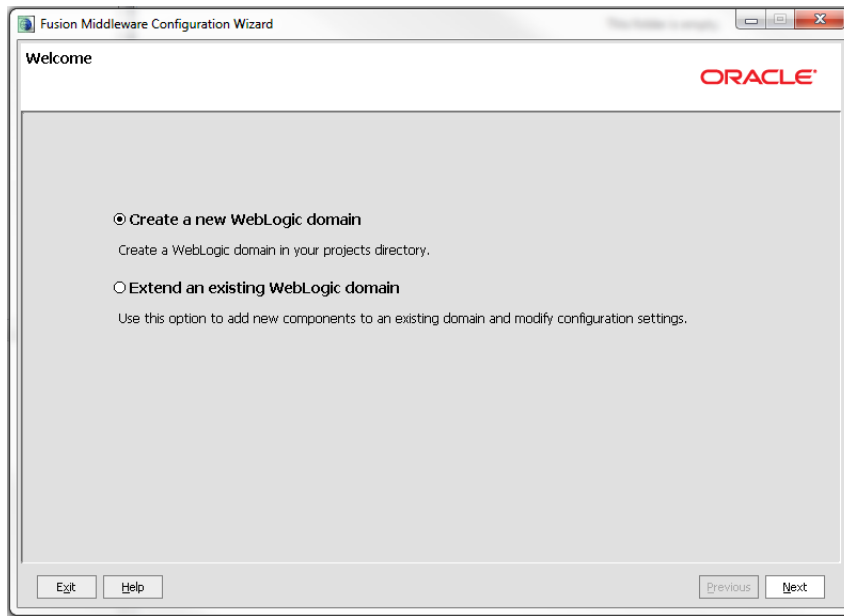


2. Select **Create a new WebLogic domain** option. Click **Next**.

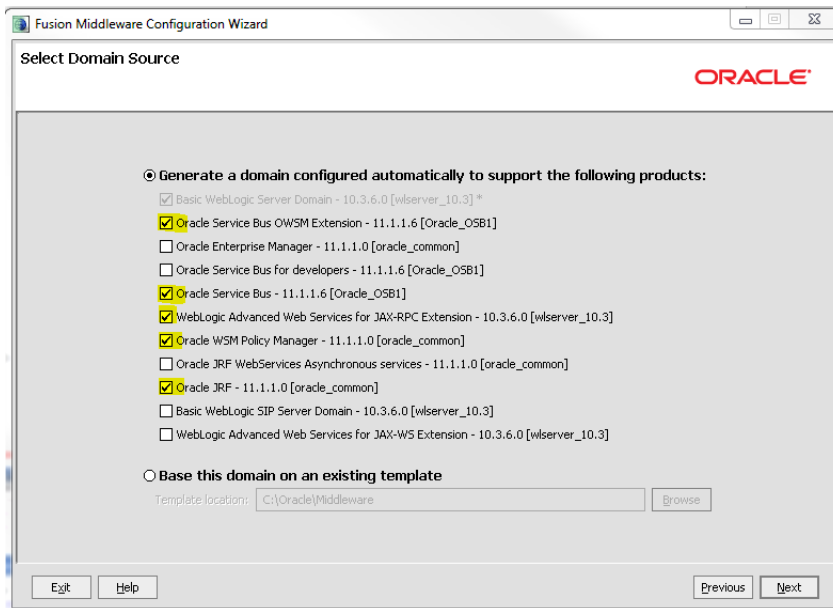


3. Select the OSB features for the domain.




4. Enter the **Domain name**, for example: `rsb_domain`.

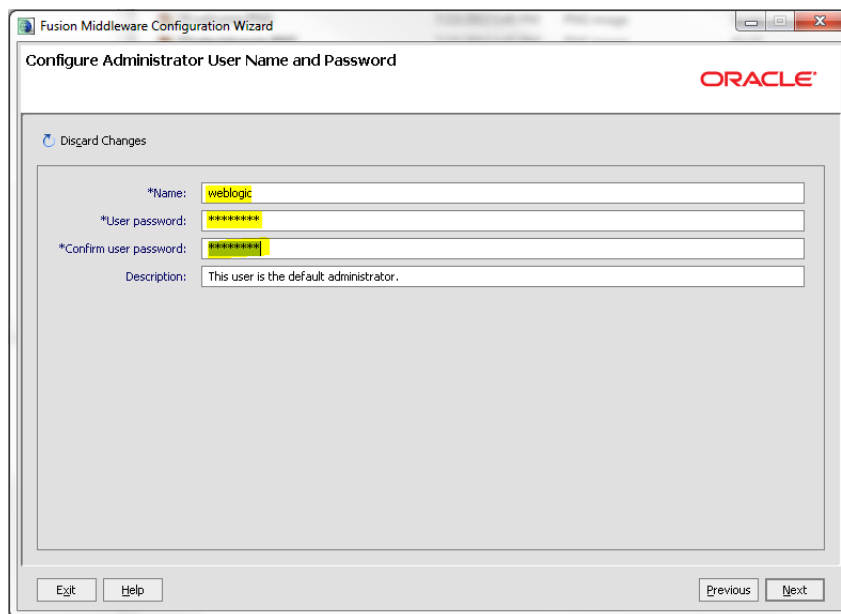


5. Enter **Name** (Username) and **User password** for the domain. Please note down the username and password. These are required again in the compilation phase of RSB.

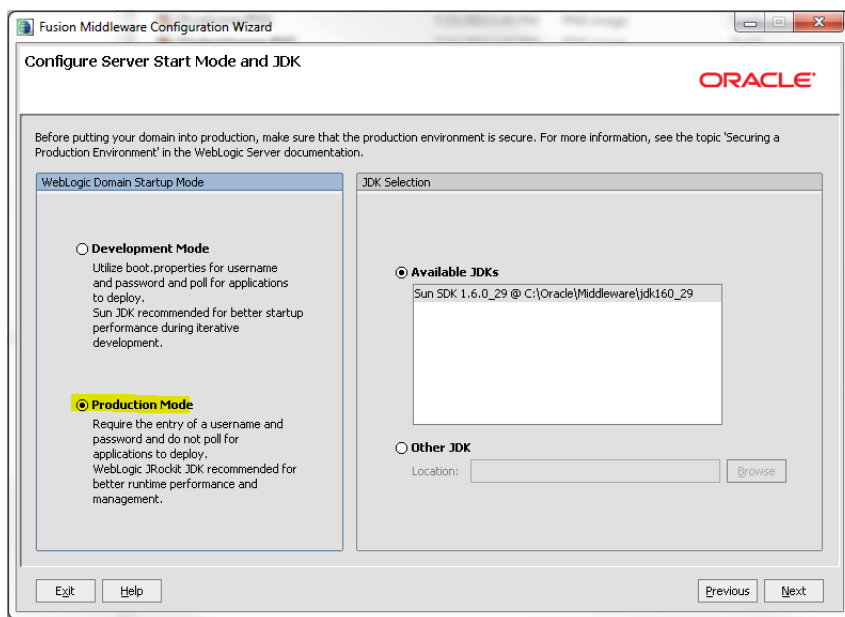


6. Select the JDK (1.7) and Start Mode.

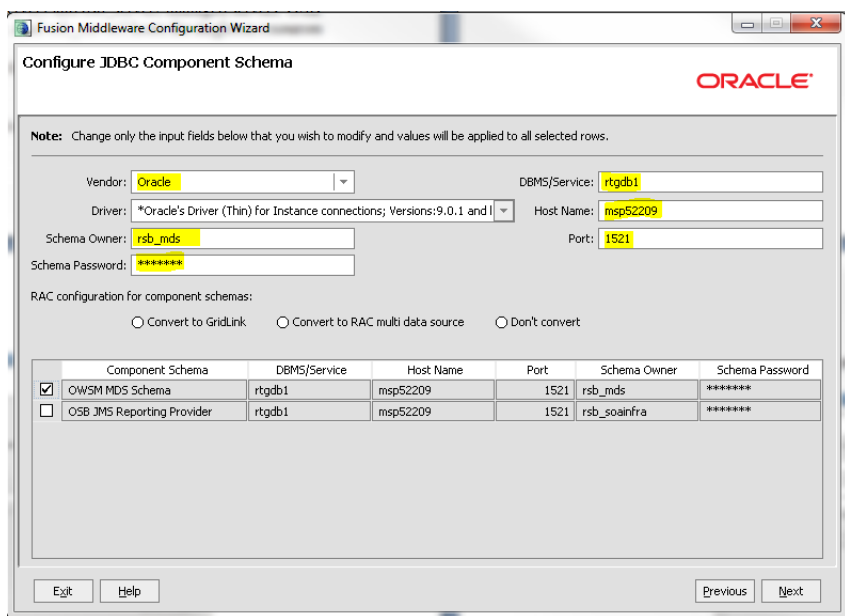


7. Provide the database details for SOAINFRA and MDS Schema. Connection details (as highlighted in the screenshot) for both schemas must be provided. The schema must be created already using the RCU tool. Specify configuration information for both schemas (in this example; rsb_soainfra and rsb_mds).

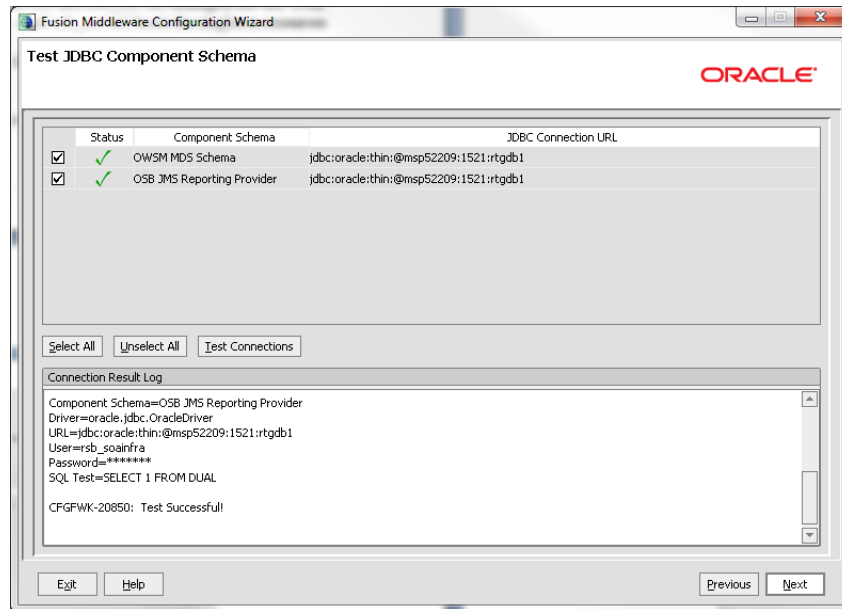


8. Test the JDBC Schema connection.

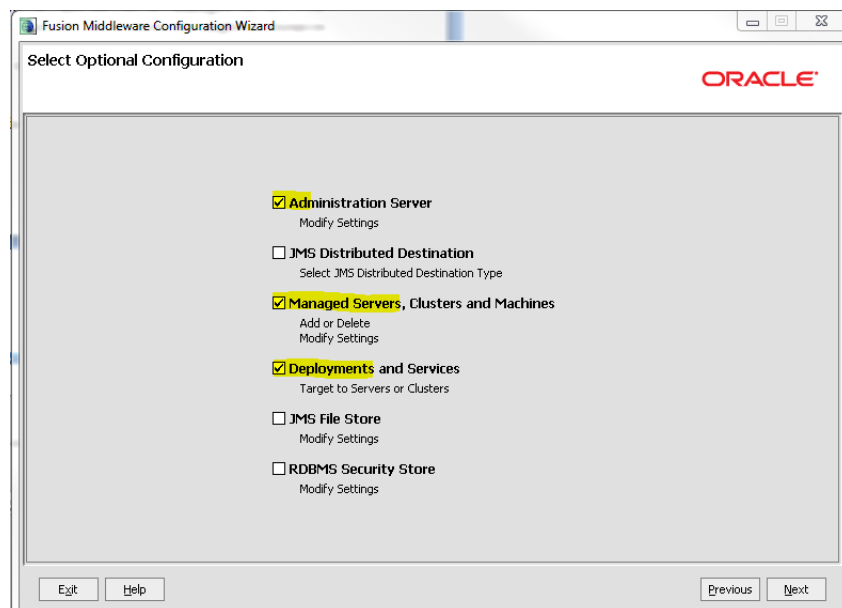


9. Select the options for creating managed servers and cluster.

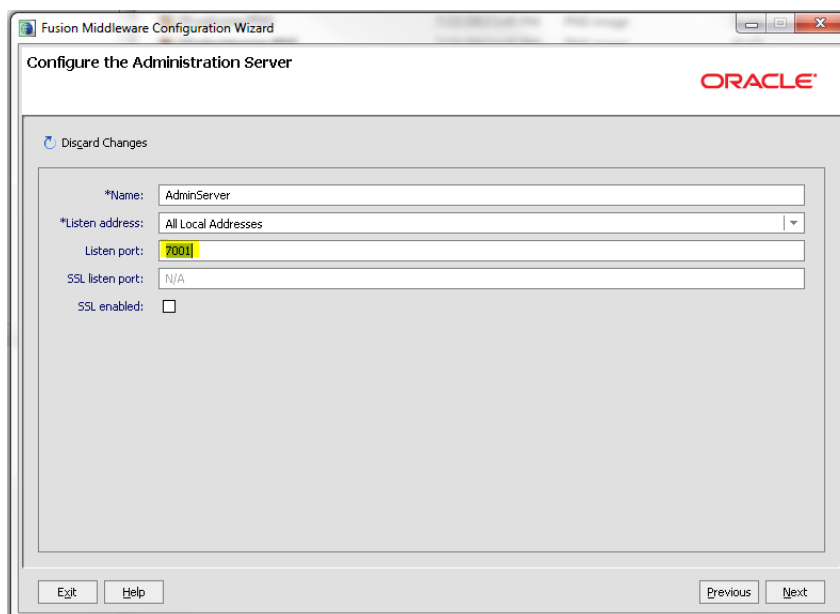


10. Enter Admin Server details. If you are using SSL, you can enable SSL in this step and specify the SSL port.

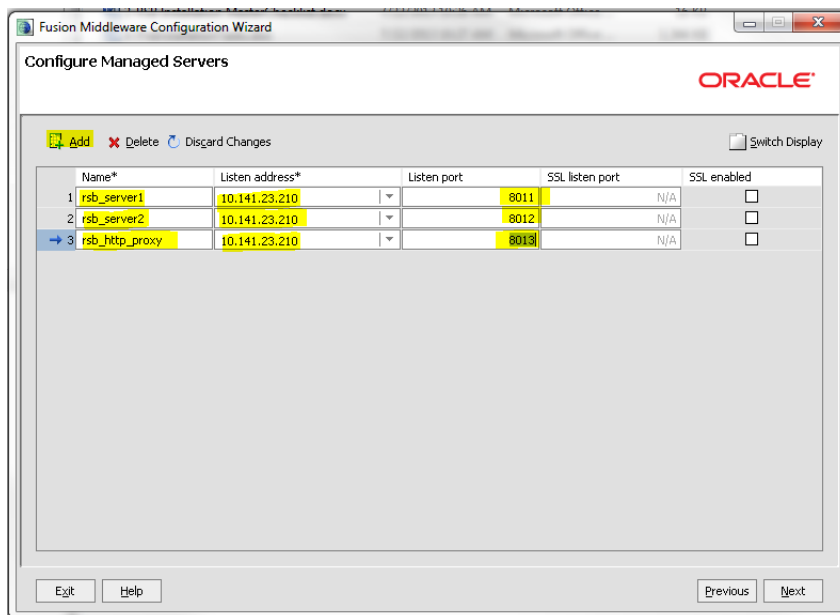


11. Enter details of all managed servers. If you are using SSL, you can enable the SSL in this step and specify the SSL port. Click Next.

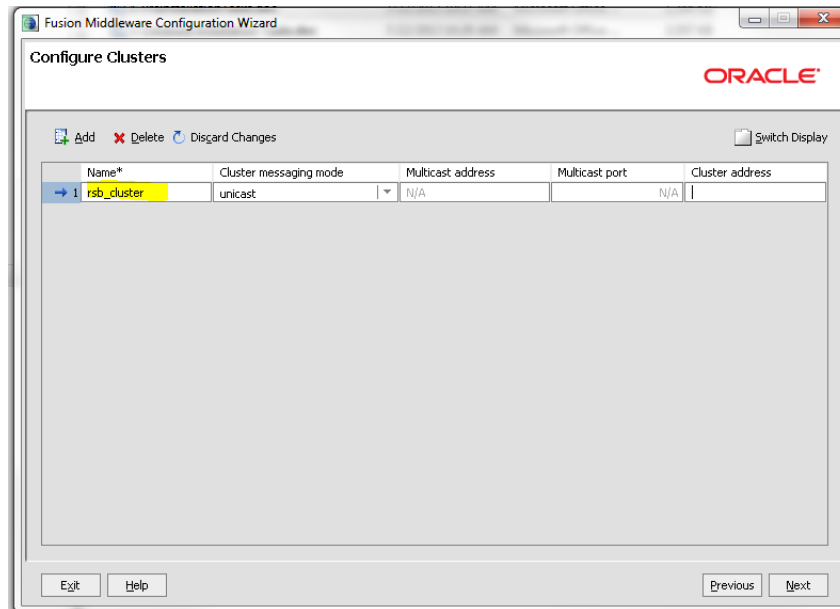


12. Enter the cluster name.

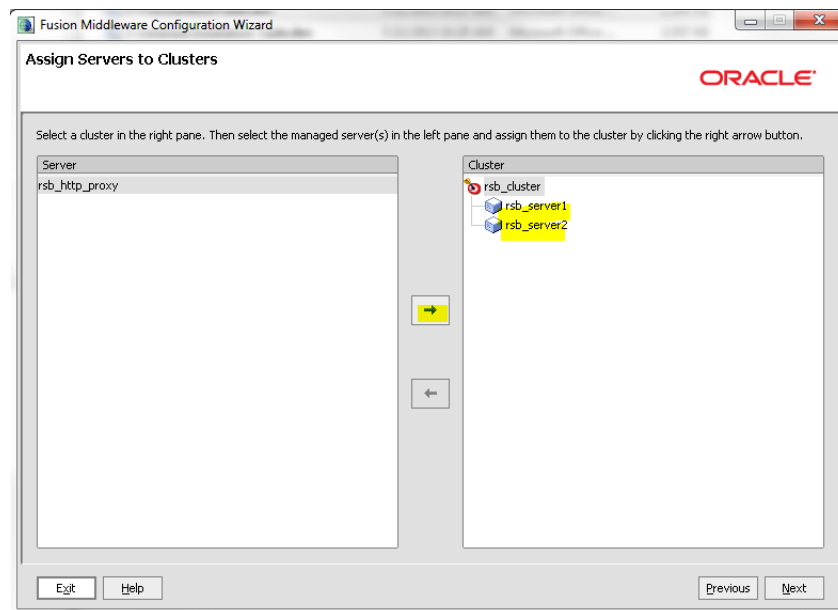


13. Add managed servers to the cluster. Notice that the proxy server, `rsb_http_proxy`, is not added to the cluster because we need that server as the HTTP proxy of the cluster.

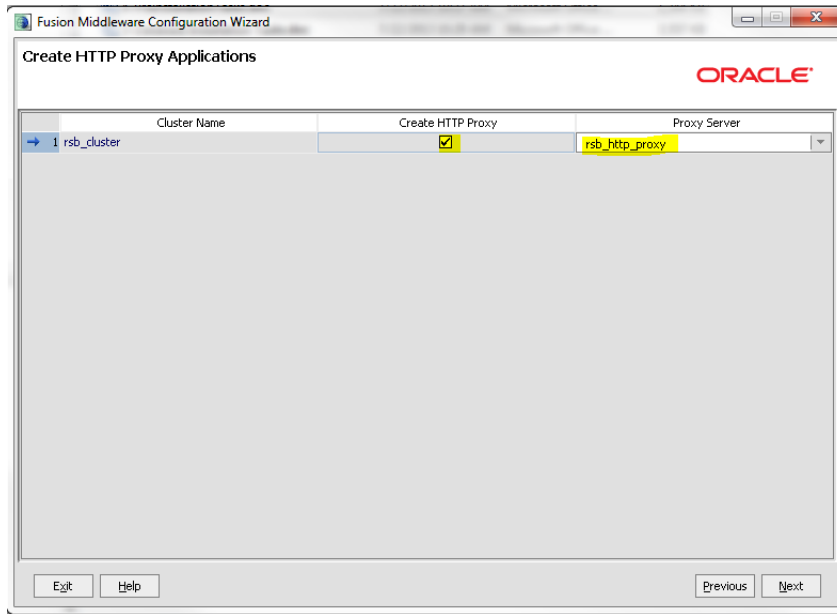


14. Enter HTTP Proxy details.

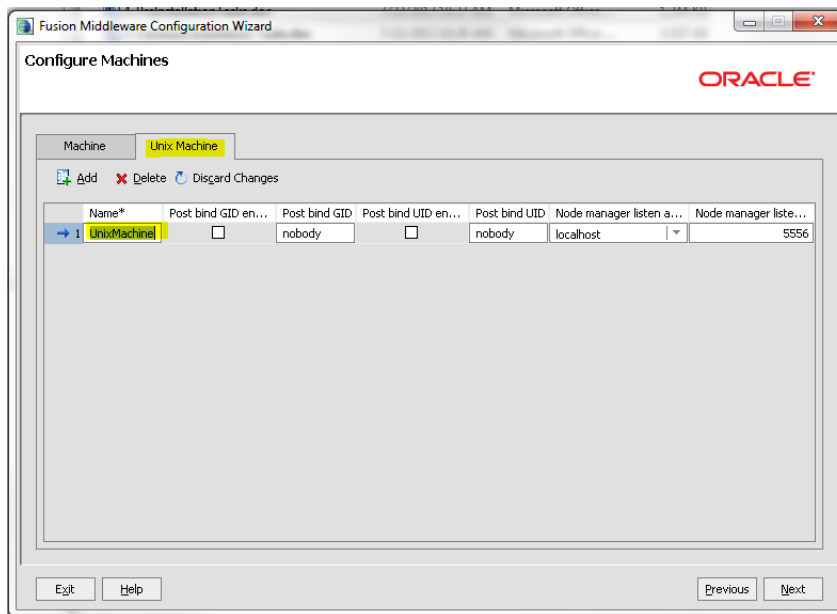

15. Configure Machine details. Click **Unix Machine** and specify the Name, Node Manager hostname and port. Click **Next**.

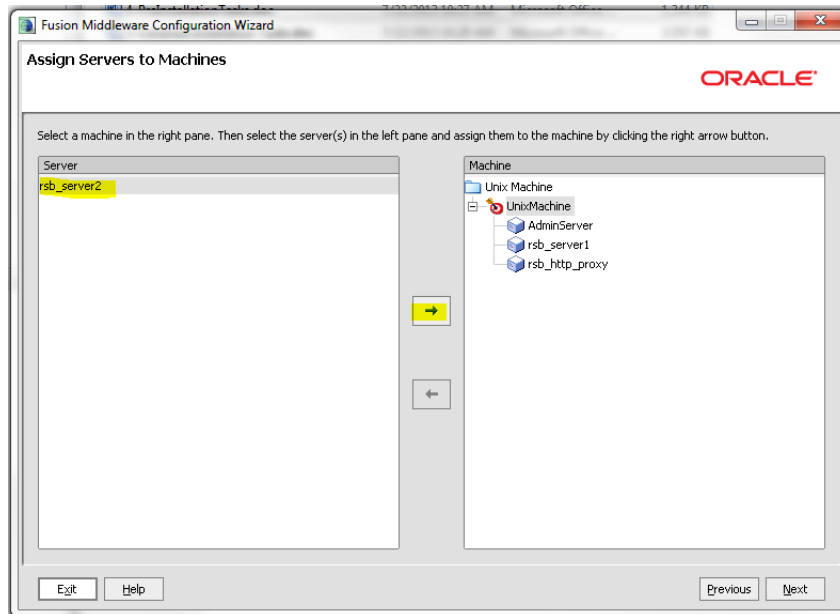


16. Add servers to the machine. Add all the servers.

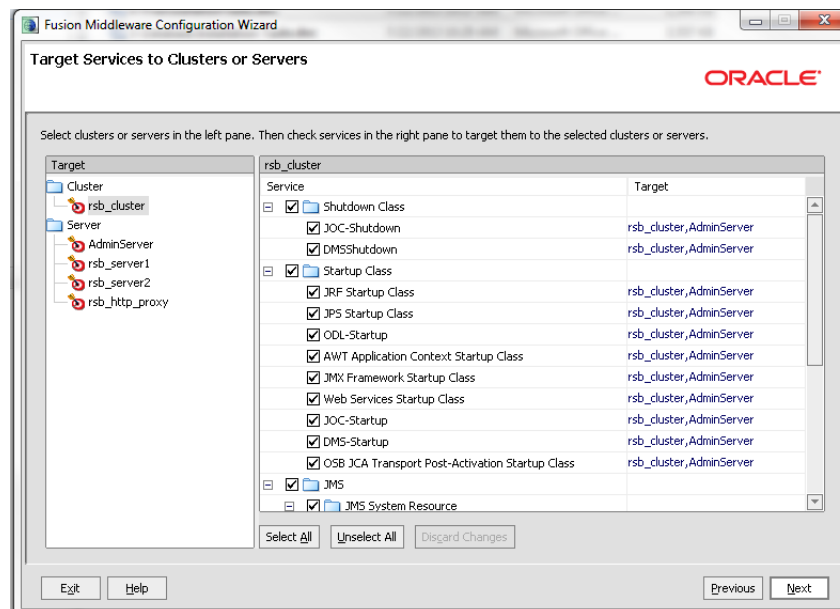


17. The next screen shows all the deployments that have been targeted to appropriate servers. You must not make any changes in this screen.

The next screen shows all the services that have been targeted to appropriate servers. You must not make any changes in this screen.

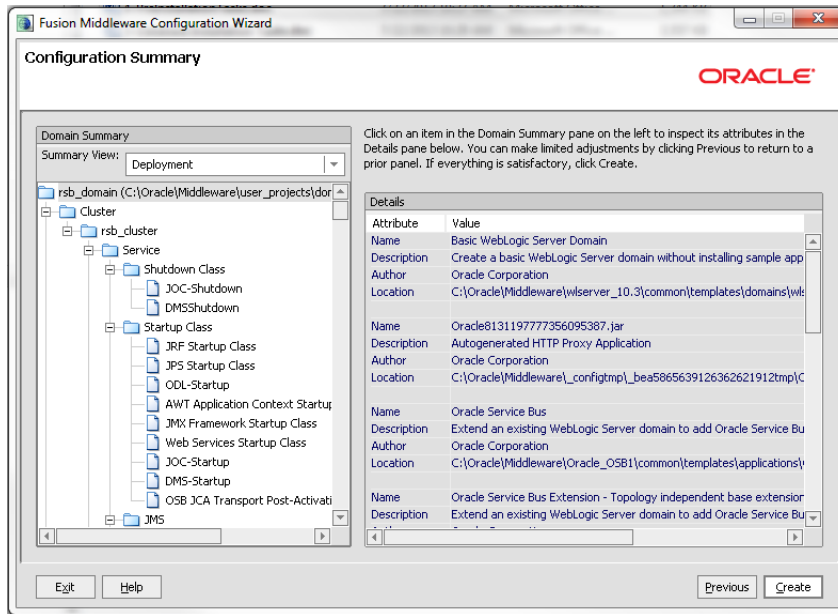

18. From the Configuration Summary page, click **Create**.

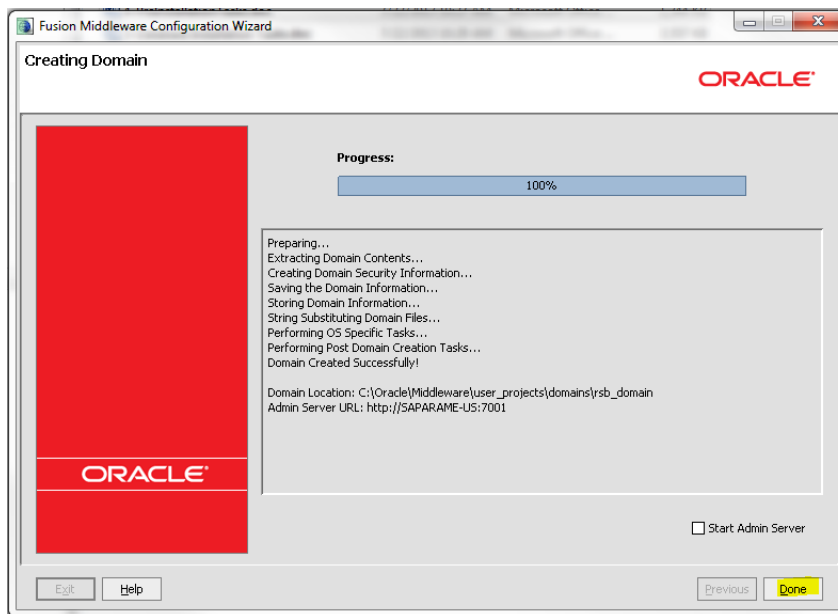

19. Domain creation confirmation page

20. Grant required permission for WebLogic to access the credential store. Edit the `<wlsHome>/wls_server_10.3/server/lib/weblogic.policy` file and add the following permission, after replacing `<domain-home>` with the correct value.

```
grant codeBase "file:<domain-home>/-" {
    permission java.security.AllPermission;
    permission oracle.security.jps.service.credstore.CredentialAccessPermission
    "credstore.sp.credstore", "read,write,update,delete";
    permission oracle.security.jps.service.credstore.CredentialAccessPermission
    "credstore.sp.credstore.*", "read,write,update,delete";
```

};

21. Edit the DOMAIN-HOME/bin/setDomainEnv.sh to add the max and min memory requirement for the servers. It is recommended to use 2GB or more for max memory.

```
USER_MEM_ARGS="-Xms1024m -Xmx2048m -XX:MaxPermSize=1024m"
```

22. If NodeManager is used to control the servers in the cluster, edit WL_HOME/common/nodemanager/nodemanager.properties file to change the StartScriptEnabled property to true and make sure the StartScriptName property is set to startWebLogic.sh. Below is a sample from the file:

```
StartScriptName=startWebLogic.sh
StartScriptEnabled=true
```

HTTPS Configuration for WebLogic Server

If you are using https (for Policy A), you will have to configure the following:

Note: For additional information on configuring Policy A or Policy B, see the *Oracle Retail Service Backbone Security Guide*.

1. Enable https port for AdminServer, Http Proxy Server and all managed servers. Specify the **Listen Address**. The **Listen Address** must match the CN entry of the server certificate. Sometimes the CN entry of the server certificate is the fully qualified name (for example, rsbhost.example.com) instead of the short hostname (for example, rsbhost). If the entries do not match, the security configurations will not work.


The screenshot displays the Oracle WebLogic Server Administration Console interface. On the left, the 'Change Center' shows 'View changes and restarts' with 'No pending changes exist'. Below it is the 'Domain Structure' tree, showing a hierarchy from 'rsb_domain' down to 'Services' and 'Security Realms'. The 'How do I...' section provides links for configuring network connections, machines, clusters, servers, and diagnostic volume. The 'System Status' section is also visible.

The main area shows the 'Settings for rsb_server1' page, with the 'Configuration' tab selected. The 'General' sub-tab is active, displaying various server settings:


- Name:** rsb_server1
- Machine:** UnixMachine
- Cluster:** rsb_cluster
- Listen Address:** mspdv217 (highlighted in yellow)
- Listen Port Enabled:**
- Listen Port:** 19703 (highlighted in yellow)
- SSL Listen Port Enabled:**
- SSL Listen Port:** 19704

At the bottom, there is a checkbox for 'Client Cert Proxy Enabled'.

2. Enable secure replication. Enable the Secure Replication Enabled option available in **Environment --> Clusters --> <cluster name> --> Configuration --> Replication**

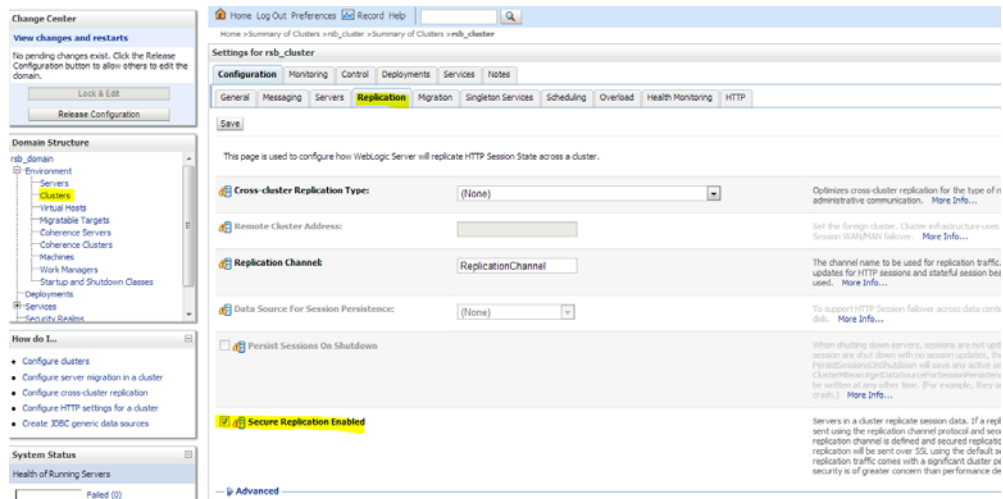

3. Set the Frontend Hostname for the cluster. This should match the CN entry of the certificate. **Environment --> Clusters --> <cluster name> --> Configuration --> HTTP**

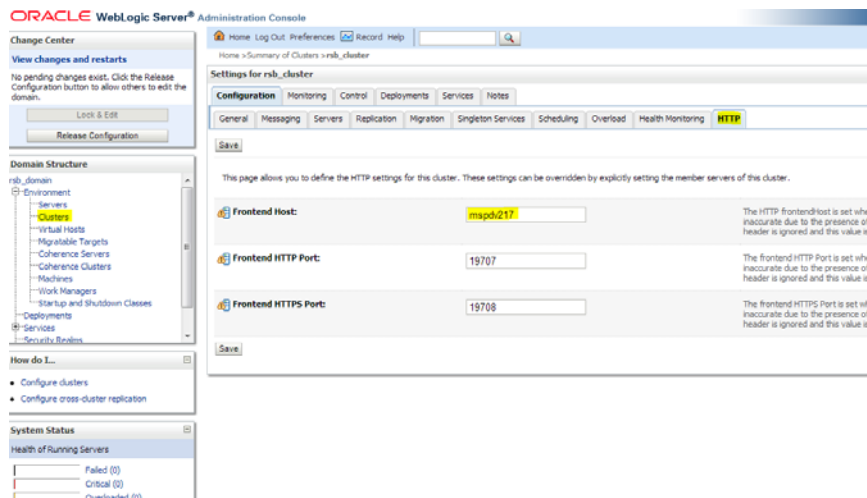

4. Enable WebLogic plug-in. Check **WebLogic Plug-In Enabled** checkbox in **Environment --> Clusters --> <cluster name> --> Configuration --> General --> Advanced**. After the change, **Save, Activate Changes** and restart the Admin Server.

Lock & Edit
Release Configuration

main Structure

- _domain
- Environment
- Servers
- Clusters**
- Virtual Hosts
- Migratable Targets
- Coherence Servers
- Coherence Clusters
- Machines
- Work Managers
- Startup and Shutdown Classes
- Deployments
- Services
- Security Realms

What to do I...

- Configure clusters
- Assign servers to clusters
- Configure server migration in a cluster
- Configure cross-cluster replication

General

Messaging Servers Replication Migration Singleton Services Scheduling Overload Health

Save

This page allows you to define the general settings for this cluster.

Name: rsb_cluster

Default Load Algorithm: round-robin

Cluster Address:

Number Of Servers In Cluster Address:

Advanced

WebLogic Plug-In Enabled

Database Installation Tasks

This chapter describes how to install the necessary database.

Repository Creation Utility

Many of the Oracle Fusion Middleware components require the existence of schemas in a database prior to installation. These schemas are created and loaded in your database using the Repository Creation Utility (RCU).

See Repository Creation Utility documentation for more information:

http://docs.oracle.com/cd/E12839_01/doc.1111/e14259/toc.htm

RCU can be downloaded from following link:

<http://www.oracle.com/technetwork/middleware/data-integrator/downloads/index.html>

After downloading the .zip file, extract the contents to a directory of your choice; this directory will be referred to as the *RCU_HOME* directory.

The repository for Oracle Service Bus (OSB) must be created using RCU tool. The repository must contain SOA Infrastructure (SOAINFRA) schema. For OWSM domain, RCU must create Meta Data Services (MDS) schema too. The User Messaging (ORASDPM) schema is automatically created by RCU tool.

While creating a schema using RCU tool, user must select/mention a prefix which is added to all the schemas created by RCU. In the following example, RCU tool is used to create a repository with SOA Infrastructure schema as RSB_SOAINFRA, Metadata Services schema as RSB_MDS. The User messaging schema i.e. RSB_ORASDPM is automatically selected by RCU.


Steps for Installation of Database Schema using RCU

1. Run rcu executable from *RCU_HOME/bin*


```
cd RCU_HOME/bin  
rcu
```

The Welcome page appears.

2. Click **Next** to continue.

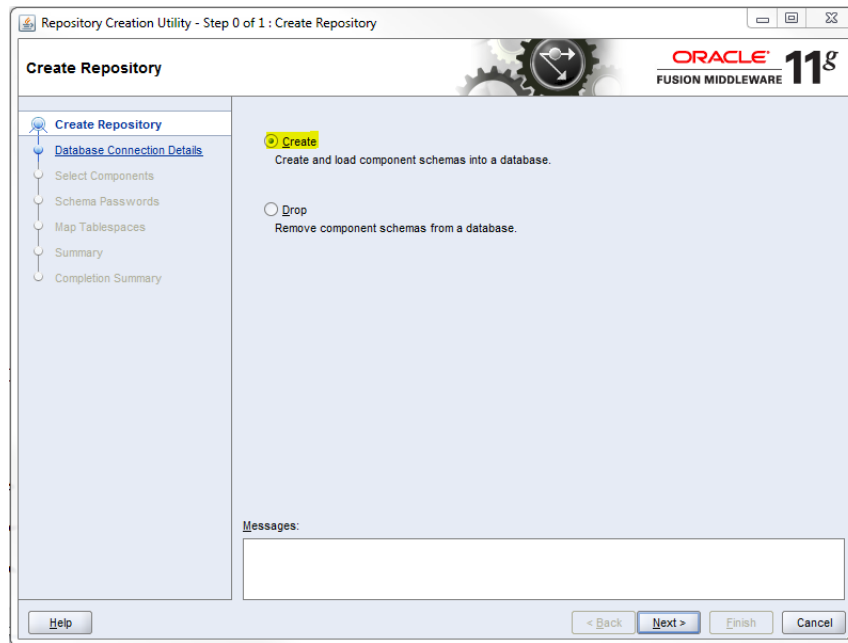


3. In Create Repository window, Select **Create** option and click **Next**.

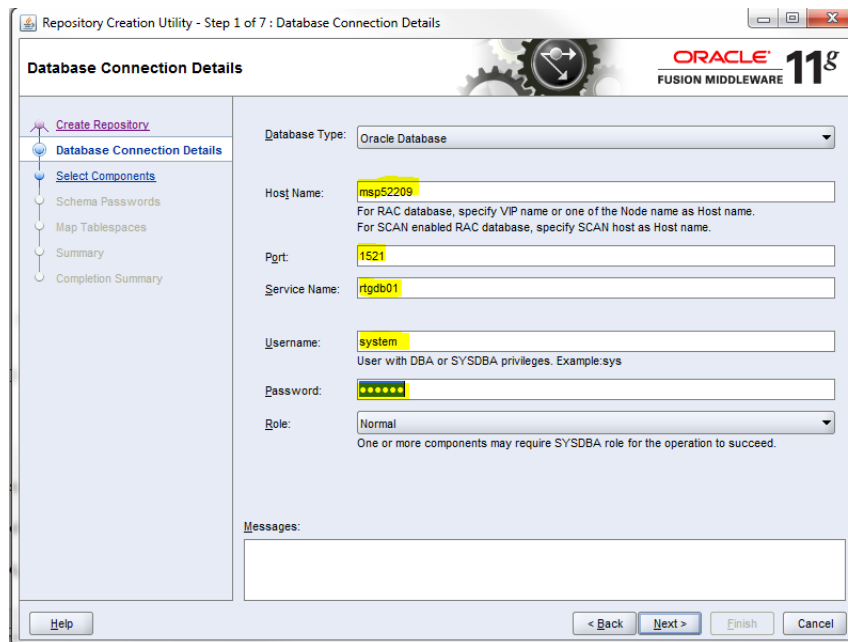


4. In Database Connection Details window, provide database details and click **Next**.

Database Type: Oracle Database


Role: SYSDBA

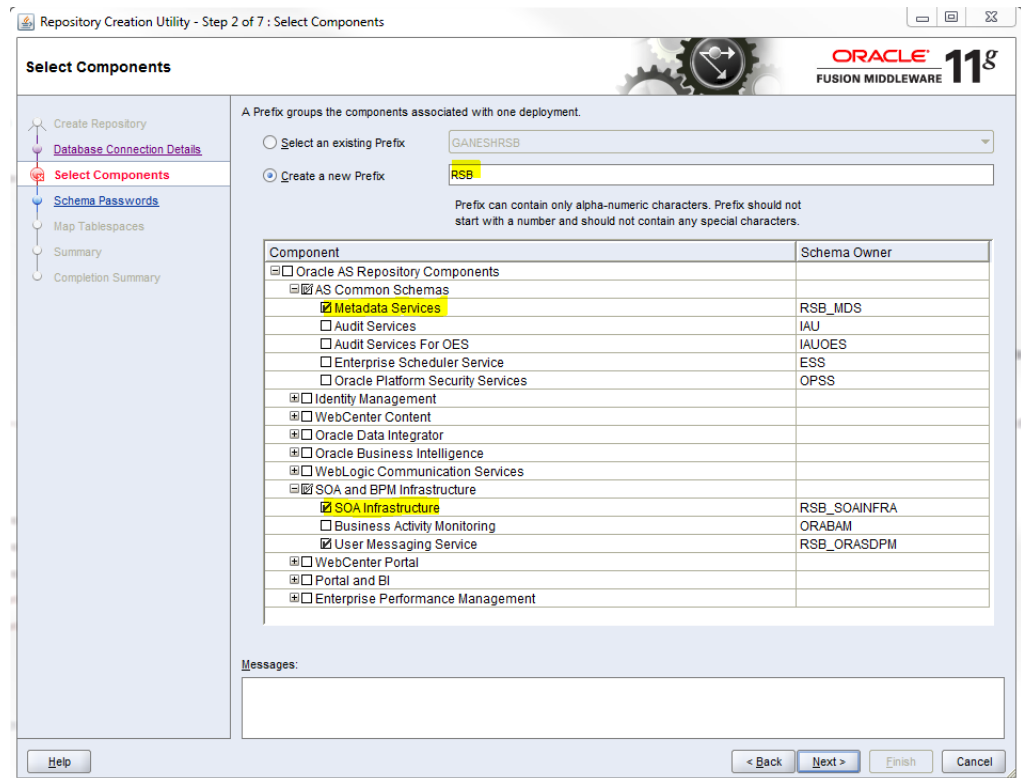


- In Select Components window, provide a prefix (Select an existing prefix from drop down or give a new one). In Component box, select SOA Infrastructure under SOA and BPM Infrastructure. Also, select Metadata Services as shown. Once the SOA Infrastructure option is selected, automatically User Messaging Service and Metadata services options get selected.

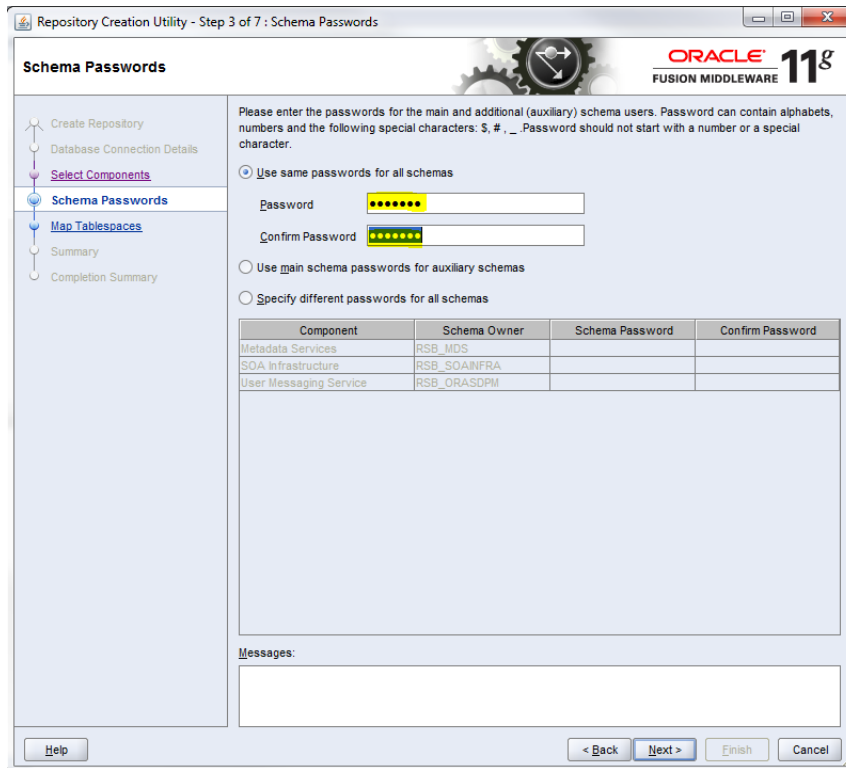


6. In Schema Passwords window, provide password and Click **Next**. Note down the schema name and passwords. These are needed during the domain creation time for configuring the OSB schemas and RSB compilation phase as credentials for si-db.

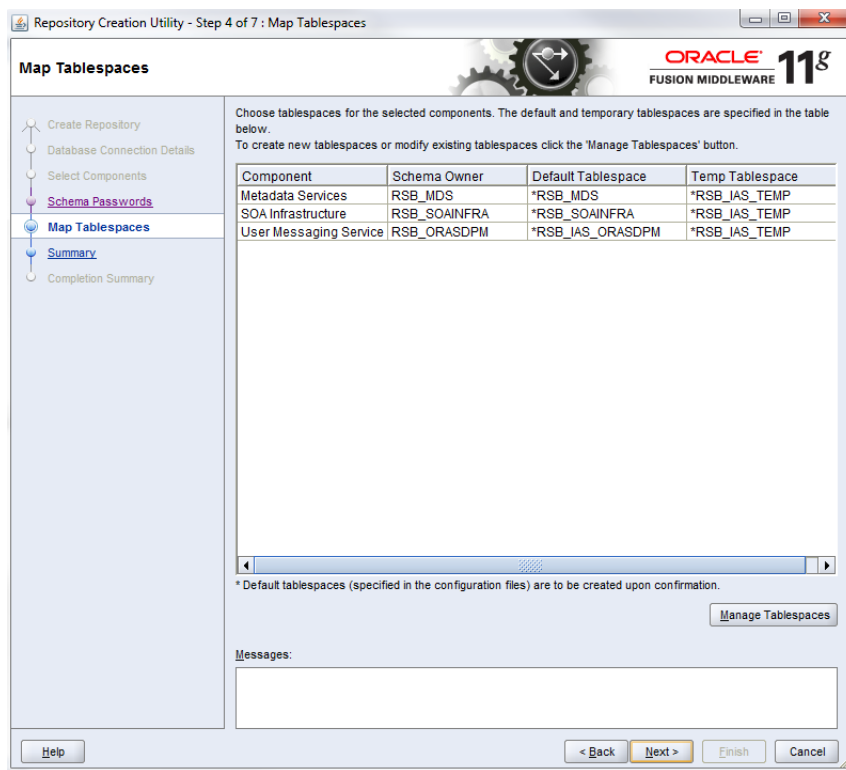

7. In Map Tablespaces window, check tablespace mapping details and click **Next**.

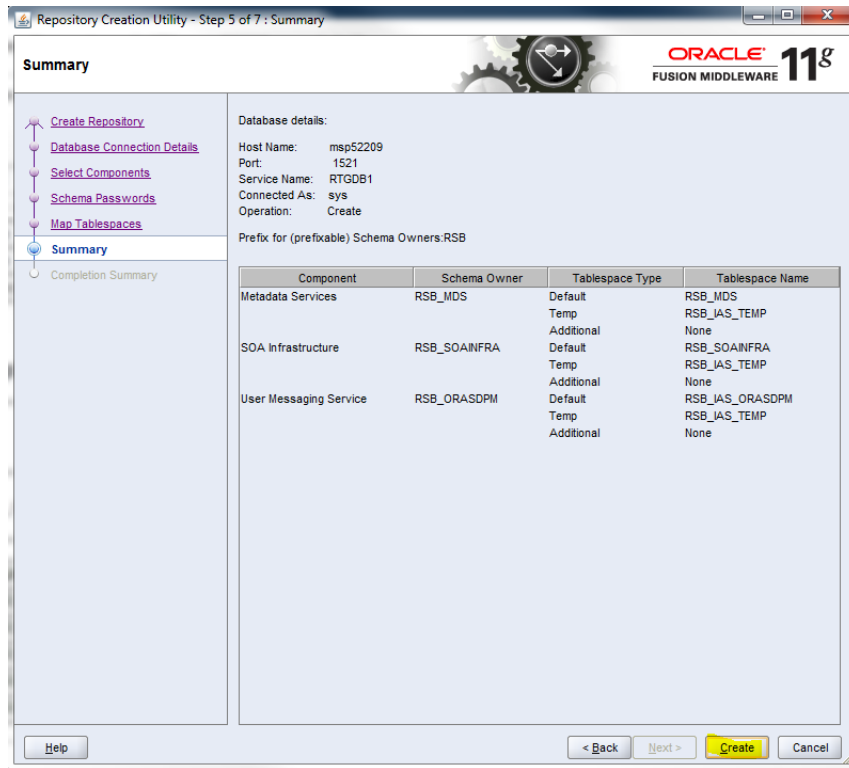

8. In Summary window, check database details and click **Create**.

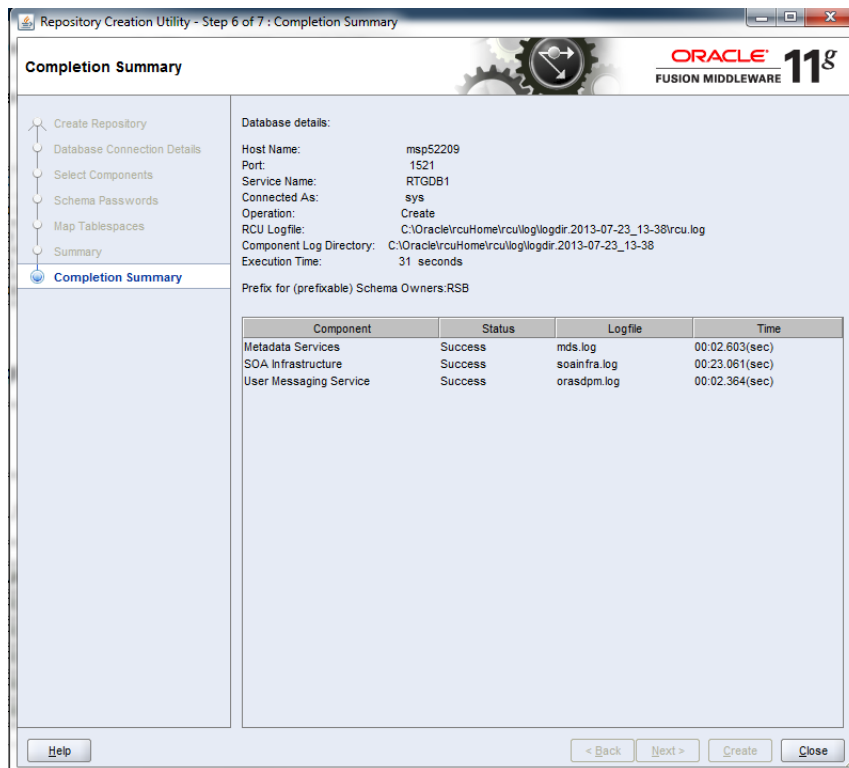

9. In Completion Summary window, click **Close**.

RSB Installation

This chapter provides instructions for installing RSB. The complete installation of RSB can be broadly divided into 4 phases:

- Download
- Configuration
- Compilation
- Deployment

Note: If there is an existing WebLogic installation on the server, you must upgrade to WebLogic 10.3.6. All middleware components associated with WebLogic server should be upgraded to 11.1.1.6.

Back up the `weblogic.policy` file (`$WLS_HOME/wlserver_10.3/server/lib`) before upgrading your WebLogic server, because this file could be overwritten. Copy over the `weblogic.policy` backup file after the WebLogic upgrade is finished and the post patching installation steps are completed.

Steps to Install RSB

The following sections describe the process of installing the RSB product.

Download

In this phase, you have to download all the necessary archive files.

1. Download `RsbKernel14.0.0ForAll14.x.xApps_eng_ga.zip` to a directory in Linux/Unix. The `rsb-home` will be created inside this directory. Extract the archive file.

```
unzip RsbKernel14.0.0ForAll14.x.xApps_eng_ga.zip
```
2. Download all `RsbAppServiceDecoratorPak<rsb_major_version>For<app><app_version>_eng_ga.zip` to `rsb-home/download-home/all-app-service-decorator` directory. Do not extract the files.
3. Download all `RsbServiceIntegrationFlowPak<rsb_major_version>For<service-name>_eng_ga.zip` to `rsb-home/download-home/all-functional-service-int-flow` directory. Do not extract the files.

4. Download `IntegrationGuide<rsb_major_version>ForAll14.x.xApps_eng_ga.zip` to `rsb-home/download-home/integration-guide` directory. Do not extract the files.
5. Download `RsbAdministrationApp<rsb_major_version>ForAll14.x.xApps_eng_ga.zip` to `rsb-home/download-home/admin-app` directory. Do not extract the files.
6. Set `JAVA_HOME` to a JDK 1.6.0+ 64 bit, 1.7.0+ 64 bit, or Jrockit 1.6 R28 build or later (64 bit for Linux and Solaris OS only).
For example:

```
export JAVA_HOME=/usr/bin/java/1.7.0
```
7. Run `rsb-home/download-home/bin/check-version-and-unpack.sh` script.

```
check-version-and-unpack.sh
```

Configuration

Note: Please run the command `uname -n` and make sure that the output matches exactly with hostname of the machine. This is important since hostname is a part of the names of many internal configuration attributes.

1. Create the RSB Database objects by running the DDL script from the following location: `rsb-home/deployment-home/conf/ddl/RSB_INFRASTRUCTURE_SCHEMA_DEFINITION.SQL`
Please provide the script to the Database Administrator to create the RSB schema. If you are using sqlplus, you may run the following command to create the objects.

```
cd rsb-home/deployment-home/conf/ddl
sqlplus <RSB_SOAINFRASchemaUser>/<password> @RSB_INFRASTRUCTURE_SCHEMA_DEFINITION.SQL
```

Note: The script expects permanent Tablespace to have been created as a prerequisite.

2. Edit `rsb-home/deployment-home/conf/rsb-deployment-env-info.properties` to configure the following properties:
 - `JAVA_HOME`
 - `rsb-deployment-env-info.service-provider-app-in-scope-for-integration`
 - `rsb-deployment-env-info.service-requester-app-in-scope-for-integration`
 - `rsb-osb-container.domain-name`
 - `rsb-osb-container.<domain-name>.home`
 - `rsb-osb-container.<domain-name>.cluster-name`
 - `rsb-osb-container.<domain-name>.<cluster-name>.http-url` (Cluster port is the port of http proxy server)
 - `rsb-osb-container.<domain-name>.admin-server-http-url`
 - `rsb-osb-container.<domain-name>.admin-server-connection-url`

- `rsb-osb-container.<domain-name>.<cluster-name>.managed-servers`: It is a comma-separated list of managed servers in the cluster, excluding the http proxy managed server.
- `rsb-osb-container.<domain-name>.<cluster-name>.<managed-server>.managed-server-connection-url`: Repeat this property for all the managed servers in the cluster.
- `service-infrastructure-db.jdbc-url`
- `edge-app-container.<app>.connection-url`: The host:port of the edge-application.
- `global.app-service-end-point-url-pattern`: The pattern of edge service URLs. (**Note:** This is different if the service is hosted on glassfish Vs WebLogic 12c)
- `rib.home.path`: It is an optional field, to be given only if a valid rib-home is present.

Following table lists the various properties and their example values:

Property	Value (Illustration)
<code>JAVA_HOME</code>	<code>/usr/java/jdk1.7.0_11</code>
<code>rsb-osb-container.do main-name</code>	<code>rsb_domain</code>
<code>rsb-osb-container.<do main>.home</code>	<code>rsb-osb-container.rsb_domain.home =/u00/rsb/Oracle/Middleware/user_projects/do mains/rsb_domain</code>
<code>rsb-osb-container.<do main>.cluster-name</code>	<code>rsb-osb-container.rsb_domain.cluster-name=rsb_cluster</code>
<code>rsb-osb-container.<do main>.<cluster name>.http-url</code> (Cluster port is the port of http proxy server)	<code>rsb-osb-container.rsb_domain.rsb_cluster.http-url=http://rsbhost:7004</code>
<code>rsb-osb-container.<do main>.admin-server-http-url</code>	<code>rsb-osb-container.rsb_domain.admin-server-http-url=http://rsbhost:7001</code>
<code>rsb-osb-container.<do main>.admin-server-connection-url</code>	<code>rsb-osb-container.rsb_domain.admin-server-connection-url=t3://rsbhost:7001</code>

rsb-osb-container.<domain>.<cluster name>.<managed-servers>	rsb-osb-container.rsb_ domain.rsb_ cluster.managed-servers=rsb_server1,rsb_server2 (Comma separated list of managed servers in the cluster, excluding the http proxy managed server)
rsb-osb-container.<domain>.<cluster name>.<managed-server>.<managed-server-connection-url>	rsb-osb-container.rsb_ domain.rsb_ cluster.rsb_ server1.managed-server-connection-url=t3://rsbhost:7002 (Repeat this property for all the managed servers in the cluster)
service-infrastructure-db.jdbc-url	jdbc:oracle:thin:@rsbhost:1521:rra1
edge-app-container.<app>.<connection-url>	edge-app-container.sim.connection-url=t3://rsbhost:8080 (the host:port of the edge application)
global.app-service-end-point-url-pattern	http://<HTTP_HOSTNAME>:<HTTP_PORT>/<SERVICE_NAME>Service/<SERVICE_NAME>Bean (The pattern of edge service URLs. Note: This is different if the service is hosted on glassfish Vs WebLogic)
rib.home.path (optional)	rib1@ribhost:/u00/rib1/rib2/Rib1400ForAll14xxApps/rib-home

Additional steps for Policy A configuration

If RSB is configured with Security Policy A, perform the following additional steps:

- Property configuration in `rsb-deployment-env-info.properties`
rsb-osb-container.<domain>.<cluster>.https-url: The property provides the HTTPS URL of the http proxy managed server.
- Override the <decorator>.app-service-end-point-url to use **https** protocol and **SSL port**. This can be done at global level OR app level too, but it is recommended to test single service end to end with SSL first during initial stabilization

Following table lists the various properties and their example values:

Property	Value (Illustration)
rsb-osb-container.rsb_ _domain.rsb_ cluster.https-url	rsb-osb-container.rsb_ domain.rsb_ cluster.http-url=https://rsbhost:7104

```
<decorator>.app-service-end-point-url https://rsbhost:7102/AdvancedShipmentNotificationBean/AdvancedShipmentNotificationService
oms-AdvancedShipmentNotification-AppServiceDecorator.app-service-end-point-url
```

3. Security Configuration: Download edge app service WSDL files.

```
cd rsb-home/service-assembly-home/bin
download-app-service-wsdl.sh
```

4. Create Policy Mapping File: Create security policy mapping file.

```
generate-rsb-decorator-security-config.sh
```

Additional steps for Policy B configuration

If RSB is configured with Policy B, perform the following additional steps:

1. Security Configuration: Download edge app web service WSDL files.

```
cd rsb-home/service-assembly-home/bin
download-app-service-wsdl.sh
```

2. Create Policy Mapping File: Create security policy mapping file

```
generate-rsb-decorator-security-config.sh
```

3. Setup Security Credentials: Setup security credentials for Message Protection.

```
setup-message-protection-security-credentials.sh
```

Compilation

Setup security credentials and compile:

```
cd rsb-home/service-assembly-home/bin
rsb-compiler.sh-setup-security-credential
```

During the compilation step, credentials need to be provided for the following aliases.

- sidb-jdbc-user-alias
- admin-server-user-alias
- rsb-admin-user-alias

Example:

Alias Name	Value (Illustration)
sidb-jdbc-user-alias	<soainfra schema>
admin-server-user-alias	<weblogic user>
rsb-admin-user-alias	<rsb user>

The `-setup-security-credential` option creates or updates the wallet file in `deployment-home/conf/security` folder. The wallet file contains userids and passwords in encrypted form. However it is possible to decrypt the information programmatically by anyone who has access to this file. Hence it is a good idea to lock down this folder from unauthorized users. You may use the following command to remove read access to this folder:

```
chmod 700 rsb-home/deployment-home/conf/security
```

Note: If the security credentials are already setup for the above aliases (in a previous compilation attempt), compilation can be directly carried out as follows:

```
cd rsb-home/service-assembly-home/bin
```

```
rsb-compiler.sh
```

Deployment

1. Start Admin Server, Proxy Server and Managed servers:

```
cd <domainHome>/bin
startManagedWebLogic.sh
<managed server>
<AdminServer URL>
```

For example:

```
startManagedWebLogic.sh "qa_test_managedServer_1" "http://rsbhost:17001"
```

2. Prepare instrumentation configurations for WebLogic server.

```
cd rsb-home/deployment-home/bin
rsb-deployer.sh -prepare-wls
```

If RSB is configured with Policy B, perform the following steps before proceeding further. For unsecured configuration or RSB configuration with Policy A, move directly to Step 3.

- a. Copy Script: Copy security scripts to RSB server

```
cd rsb-home/integration-lib/rsb-tools/scripts
scp generate-pki-certificate-keystore-for-osb.sh
<user>@<host>: /<domainHome>/config/
scp import-remote-server-public-key-certificate-into-keystore.sh
<user>@<host>: /<domainHome>/config/
scp export-server-public-key-certificate-from-keystore.sh
<user>@<host>: /<domainHome>/config/
```

- b. Generate Certs and Key store: Generate private key, public key and key store for the RSB server (To be done in the RSB server).

. <domainHome>/bin/setDomainEnv.sh (This command must be run in the current shell. Prefix the command with a period and a space character)

```
cd <domainHome>/config
generate-pki-certificate-keystore-for-osb.sh
```

You will be asked for a keystore password and private key password. Please note the passwords. You will have to provide the same passwords in subsequent steps.

Note: If you are getting the certificate from a CA, do not run the above command. Instead, create a keystore with the name <hostname>-keystore.jks where hostname is the short hostname of the server (output of *hostname -s* command) and then import the certificate and key (public key and private key) to the key store. You may use the following command to import to the keystore.

```
java utils.ImportPrivateKey -certfile <certificate file> -keyfile <private
key file> -keyfilepass <private key password> -keystore
<hostname>-keystore.jks -storepass <keystore password> -alias
```

```
<hostname>-public-private-key-alias -keypass <private key password>
```

c. Copy app server certificate(s)

Copy edge app certificate file(s) to `<wlsHome>/config` of the RSB server. The file name must be `<remote-host>-certificate.der`

Note: See RSB Security Guide for instructions to export certificate from edge app server.

d. Import app server certificate(s):

Import all the edge app server public key certificates to RSB server's keystore. If the edge apps are deployed in different servers, import all the certificates to the keystore (To be done in the RSB server):

```
cd <domainHome>/config
import-remote-server-public-key-certificate-into-keystore.sh <app>
<remote-host>
```

For example:

```
import-remote-server-public-key-certificate-into-keystore.sh cm <hostname>
```

For the keystore password, provide the password you specified in the step ii.

e. Configure RSB Server: Configure the RSB server to use the key store generate in the previous steps.

```
cd rsb-home/deployment-home/bin
configure-rsb-app-server-for-security-policy-b.sh
```

For the keystore password and private key password, provide the passwords you specified in the step ii.

f. Restart Servers: Restart Admin and Managed Servers

3. Deploy all the decorators.

■ Deploy one decorator at a time.

```
cd rsb-home/deployment-home/bin
rsb-deployer.sh -deploy-rsb-service <OSB Project jar>
```

For example, `rsb-deployer.sh -deploy-rsb-service igs-ASNInPublishing-AppServiceDecorator.jar`

■ Deploy all the decorators of an app at a time.

```
cd rsb-home/deployment-home/bin
rsb-deployer.sh -deploy-all-rsb-service-for-app <appName>
```

For example, `rsb-deployer.sh -deploy-all-rsb-service-for-app igs`

■ Deploy all the decorators of all apps in scope at a time.

```
cd rsb-home/deployment-home/bin
rsb-deployer.sh -deploy-all-rsb-service
```

4. Deploy rib4oms injector service

```
cd rsb-home/deployment-home/bin
rsb-deployer.sh -deploy-rsb-service
RibOmsToRsbOmsRouting-ServicesIntegrationFlow.jar
```

5. Deploy RSB Admin app i.e. Retail Integration Console (RIC):

```
cd rsb-home/deployment-home/bin
rsb-deployer.sh -deploy-admin-app
```

6. If RSB policy B is configured, perform the following step else jump to Step 7:

Export Certificate: Copy the script from integration-lib. Export the certificate, so that it can be used by the service consumers. (To be done in the RSB server).

```
cd <wlsHome>/config
```

```
export-server-public-key-certificate-from-keystore.sh
```

7. Restart all the servers i.e. Admin Server, managed servers and proxy server.

Install JSIT

JSIT is a tool that can help to mock the behavior of retail applications. JSIT can be used to validate the installation of RSB, in the absence of edge applications. This is an optional step, only needed when one or more real oracle retail edge application is not ready at the time of RSB installation. Later, when the applications are ready, modify the service endpoints in the RSB configuration file (*rsb-deployment-env-info.properties*), recompile RSB and redeploy RSB decorators and admin app.

Download and Prepare SIT

1. Download and save `javaee-service-interface-tester.ear` in an install stage folder, which will be referred to here as `SIT_JAVAEE_APP_HOME`.
2. Download and save RSE generated JavaEE `ejb-jar` (`<app>-service-ejb.jar`) in `SIT_JAVAEE_APP_HOME`. `<app>` is the application name that hosts the application service. e.g., `rms-service-ejb.jar`.

Merge the two components:

```
jar -uvf javaee-service-interface-tester.ear <app>-service-ejb.jar
```

Note: Multiple applications can be hosted on JSIT.

For example:

```
jar uvf javaee-service-interface-tester.ear rms-service-ejb.jar  
ooc-service-ejb.jar oms-service-ejb.jar
```

Deploy `javaee-service-interface-tester.ear` to Glassfish

1. Open Glassfish (JavaEE 6) Application Service console.

For example:

```
http://localhost:4848/"http://localhost:4848
```

2. Deploy `javaee-service-interface-tester.ear`.

Your web browser --> Glassfish AdminConsole --> Application --> Deploy --> Browse to **`javaee-service-interface-tester.ear`**

3. Click **Deploy**.

Deploy SIT to WebLogic 12c

1. Add `derby.jar` to your WebLogic startup classpath.

To do this edit the `commEnv.sh` script in WLS and add the `derby.jar` to `DERBY_CLIENT_CLASSPATH` variable.

For example, `DERBY_CLIENT_CLASSPATH="${DERBY_HOME}/lib/derby.jar:${DERBY_HOME}/lib/derbyclient.jar"`

2. Open WebLogic 12c Console.
 - a. Deploy `javaee-service-interface-tester.ear`.

Your Web Browser --> WebLogic AdminConsole --> Deployments --> Deploy --> Browse to **javaee-service-interface-tester.ear**

- b. Click **Deploy**.

Note: Please do not change the default application name. It should be kept as *javaee-service-interface-tester*.

Verify JSIT

JSIT Installation can be verified by browsing the URL

<http://<hostname>:<port>/javaee-service-interface-tester-web>. You should be able to see the following screens if the installation is successful.

Displaying 1..10 of 19 records

ID	RequestURL	ResponseURL	RequestURLMask	Status	OperationName	ServiceName	
1	csa11Fu110v0C7dDeao mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/Fu110v0C7dDeao/v1* mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/Fu110v0C7dDeao/v1* csa11Customer_order_no=C2000ff0a0802V000g0z A20071v0q0u0a0F0e0e0a11Customer_order_no csa11Fu110v0C7dDeao_no=F0139280P1T00F0v0d0a Dy0b00v0v0d0a0e0e0a11Fu110v0C7dDeao_no csa11confLaw_type=K/csa11confLaw_type	csa216Iz0v0c10nSuccess mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/Iz0v0c10nSuccess/v1* mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/Iz0v0c10nSuccess/v1* csa216Iz0v0c10nSuccess/csa216Iz0v0c10nSuccess	D9A3EAF10B2110D41066AF556B	ACTIVE_SUCCESS_RESPONSE_XML	orderCustom	FullOrderCustomService	View Edit Destroy
2	csa201CustomerC01Deo mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/CustomerC01Deo/v1* csa201search_type=SEARCH_BY_CUSTOMER_ID/csa201search _type=csa201Customer_order_no=C2000ff0a0802V000g0z csa201v10v0z_search/csa201v10v0z_search csa201ignore_name_search/csa201ignore_name_search csa201max_reduced/csa201max_reduced csa201CustomerC01Deo	csa201CustomerC01Deo mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/CustomerC01Deo/v1* mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/CustomerC01Deo/v1* mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/CustomerC01Deo/v1* mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/CustomerC01Deo/v1* mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/CustomerC01Deo/v1* mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/CustomerC01Deo/v1*	876C7803F98D408208F8304FA3AF	ACTIVE_SUCCESS_RESPONSE_XML	queryCustomer	CustomerService	View Edit Destroy
3	csa201CustomerC01Deo mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/CustomerC01Deo/v1* csa201search_type=SEARCH_BY_CUSTOMER_ID/csa201search _type=csa201Customer_order_no=C2000ff0a0802V000g0z csa201v10v0z_search/csa201v10v0z_search csa201ignore_name_search/csa201ignore_name_search csa201max_reduced/csa201max_reduced csa201CustomerC01Deo	csa201CustomerC01Deo mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/CustomerC01Deo/v1* mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/CustomerC01Deo/v1* mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/CustomerC01Deo/v1* mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/CustomerC01Deo/v1* mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/CustomerC01Deo/v1* mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/CustomerC01Deo/v1*	81926A4A911C89E3F680514E29E1	ACTIVE_SUCCESS_RESPONSE_XML	queryCustomer	CustomerService	View Edit Destroy
4	csa201ShippingOptionsC01Deo mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/ShippingOptionsC01Deo/v1* mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/ShippingOptionsC01Deo/v1* mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/ShippingOptionsC01Deo/v1* mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/ShippingOptionsC01Deo/v1* mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/ShippingOptionsC01Deo/v1* mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/ShippingOptionsC01Deo/v1*	csa201ShippingOptionsC01Deo mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/ShippingOptionsC01Deo/v1* mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/ShippingOptionsC01Deo/v1* mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/ShippingOptionsC01Deo/v1* mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/ShippingOptionsC01Deo/v1* mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/ShippingOptionsC01Deo/v1* mls:na11*http://www.oracle.com/retail/integrat ion/naa/bu/ShippingOptionsC01Deo/v1*	893C43018A044FCE13B7938D40CA1	ACTIVE_SUCCESS_RESPONSE_XML	ShippingOptions	ShippingOptionsService	View Edit Destroy

Post Installation Tasks

Verification using RSB Admin

Once the deployment process is completed and all the servers are restarted, verify the success by accessing the rsb-admin app i.e. Retail Integration Console (RIC)

Open the link: *http://hostname:port/rsb-admin*, where hostname and port are of the Admin Server.

Check if all the tabs are opening without error.

Common Issues

- -bash: sqlplus command not found

Solution: sqlplus command should be run on machine where Oracle database is installed.

Set Oracle Database Home directory path in a variable say ORACLE_HOME and export ORACLE_HOME/bin in the classpath. To add entries into path perform the following steps:

```
ORACLE_HOME= /u00/oracle/app/oracle/product/11.2.0/dbhome_1
export ORACLE_HOME
PATH=$PATH:$ORACLE_HOME/bin
export PATH
```

- Decorators not getting deployed in non-secure deployment.

Solution: OWSM is required even in non-secure deployment. Make sure that OWSM is configured for WebLogic domain where decorators are being deployed. User must make sure that Oracle Service Bus OWSM Extension is selected while WebLogic domain is created/extended.

- Admin app was showing the error "*Could not initialize class au.awt.GraphicsEnvironment*".

Solution: Issue can be resolved by setting the variable *java.awt.headless* to true.
(-Djava.awt.headless=true)

Appendix: RSB Installation Checklist

Notations

- wlsHome - The home directory of WebLogic. e.g., /u00/rsb/Oracle/Middleware
- domainHome - The home directory of the domain. e.g., /u00/rsb/Oracle/Middleware/user_projects/domains/rsb_domain
- rcuHome - The home directory of Repository Creation Utility. e.g., /u00/rsb/Oracle/rcuHome
- app - the application acronym. e.g., sim, rms
- HIGHLIGHTED STEPS ARE ADDITIONAL STEPS REQUIRED FOR SECURITY. INSTALLATION WILL WORK WITHOUT ENABLING THE SECURITY
- [PolicyA] - These instructions are specific to security policy A configuration
- [PolicyB] - These instructions are specific to security policy B configuration

Prerequisites

Task	Notes	Command	Example
1. [PolicyA][PolicyB] Security Prerequisite: Secure Edge App Services	RSB supports security. However, primary lifecycle steps work with/without enabling security	Refer to the document <i>RSB Security Guide</i> for securing app services	
2. Download and stage all third-party software			
3. Install JDK	Version 1.7		
4. Install WebLogic	Version 10.3.6		
5. Install Oracle DB server	11g		
6. Install OSB on WebLogic	Version 11.1.1.6		
7. Install RCU	Version 11.1.1.6 The repository for OSB must be created with this tool		

8. Create DB schema for OSB	Use Repository Creation Utility (RCU)	<rcuHome>/bin/rcu	<p>Create schema name: RSB_SOAINFRA -Under SOA Infrastructure in RCU</p> <p>[PolicyA][PolicyB]Create schema name: RSB_MDS - Under Metadata Services in RCU</p> <p>(OWSM domain requires MDS schema)</p> <p>Note: The schema RSB_ORSDPM will be automatically selected by RCU.</p>
9. Configure OSB domain [PolicyA][Policy B] Create OWSM domain Create a cluster	<p>Choose OSB (Oracle Service Bus - 11.1.1.6)</p> <p>ADF (Oracle JRF - 11.1.1.0)</p> <p>Choose OSB OWSM Extension-11.1.1.6</p> <p>Create AdminServer</p> <p>Create 1 managed server for Http Proxy</p> <p>Create 2 managed servers</p>	<p>cd <wlsHome>/wlserver_10.3/common/bin config.sh</p>	<p>rsb_domain (See <i>RSB Deployment Architecture.doc</i> in References for detailed instructions)</p> <p>rsb_cluster AdminServer rsb_server1 rsb_server2</p> <p>[PolicyA] Note: Enable SSL for all the managed servers during creation. This can be done post creation too using WebLogic Console.</p> <p>Environment --> Servers --> Click on <M.Server> --> Check "SSL Listen Port Enabled" --> Specify the port number --> Save --> Activate Session</p>
10. Install RIB (optional)	A valid RIB home is required for the deployment of RSB, if RIB is enabled.		

Recommended Port Numbers for WebLogic Servers

Each WLS Domain has a unique number in the thousands place value. It starts from 7, increments of 1	SSL or non SSL is designated by the hundredth place value	Admin Server - Tenth and Unit place value is always 01	Managed Server - covers unit and tenth place value, starting from 2 increment of 1	Example
---	---	--	--	---------

7XXX - first domain in a machine, 8XXX - second domain in a machine, 9XXX, 10XXX, 11XXX	X0XX for non-SSL X1XX for SSL	X001 - for non SSL	X0X2, X0X3, X0X4,...X0X9,X010,X011 - for non SSL	7001 7101
X101 - for SSL	X1X2, X1X3, X1X4,...X1X9,X110,X111 - for SSL			

Prepare WebLogic Server for RSB deployment

Task	Notes	Command	Example
1. Grant WebLogic permission to access credential wallet	Edit <i>weblogic.policy</i> and add the permission to access credential wallet.	cd <wlsHome>/wlserver _10.3/server/lib vi weblogic.policy	grant codeBase "file:/u00/rsb/Oracl e/Middleware/user_ projects/domains/rs b_domain/" { permission java.security.AllPerm ission; permission oracle.security.jps.ser vice.credstore.Creden tialAccessPermission "credstore.sp.credsto re", "read,write,update,de lete"; permission oracle.security.jps.ser vice.credstore.Creden tialAccessPermission "credstore.sp.credsto re.*", "read,write,update,de lete"; };
2. JVM heap size (Optional)	Set maximum and minimum heap size	cd <domainHome>/bin vi setDomainEnv.sh	USER_MEM_ ARGS="-Xms1024m -Xmx2048m -XX:MaxPermSize=10 24m"

Download

Task	Notes	Command/Example
1. Download RSB Kernel	Download <i>RsbKernel14.0.0ForAll14.x.xApps_eng_ga.zip</i> to a directory in Linux/Unix. The rsb-home will be created inside this directory. Extract the archive file.	

2. Download Decorators	Download all <i>RsbAppServiceDecoratorPak</i> <rsb_major_version>For<app_version>_eng_ga.zip to rsb-home/download-home/all-app-service-decorator/ directory. Do not extract the files.	
3. Download Service Flows	Download all <i>RsbServiceIntegrationFlowPak</i> < rsb_major_version >For<service-name>_eng_ga.zip to rsb-home/download-home/all-functional-service-int-flow directory. Do not extract the files.	
4. Download Integration Guide	Download <i>IntegrationGuide</i> <rsb_major_version >ForAll14.0.0Apps_eng_ga to rsb-home/download-home/integration-guide directory. Do not extract the files.	
5. Download Admin App	Download <i>RsbAdministrationApp</i> < rsb_major_version >ForAll14.x.xApps_eng_ga.zip to rsb-home/download-home/admin-app directory. Do not extract the files.	
6. Set JAVA_HOME	Set JAVA_HOME to a JDK 1.6.0+ 64 bit, 1.7.0+ 64 bit, or Jrockit 1.6 R28 build or later (64 bit for Linux and Solaris OS only).	export JAVA_HOME=/usr/bin/java/1.7.0
7. Check version and unpack	Run the check version and unpack script	cd rsb-home/download-home/bin check-version-and-unpack.sh

8. Create RSB Database objects	DDL script location: <i>rsb-home/deployment-home/conf/ddl/RSB_INFRASTRUTURE_SCHEMA_DEFINITION.SQL</i>	sqlplus <RSB_SOAINFRASchemaUser> /<password> @RSB_INFRASTRUTURE_SCHEMA_DEFINITION.SQL
	The script expects permanent Tablespace created as a prerequisite.	

Configure

Edit *rsb-home/deployment-home/conf/rsb-deployment-env-info.properties* to configure following properties:

Property	Example Value
JAVA_HOME	/usr/java/jdk1.7.0_11
rsb-osb-container.do-main-name	rsb_domain
rsb-osb-container.<do-main>.home	rsb-osb-container. <i>rsb-domain.home</i> =/u00/rib1/Oracle/Middleware/user_projects/do_mains/rsb_domain
rsb-osb-container.<do-main>.cluster-name	rsb-osb-container. <i>rsb_domain</i> .cluster-name=rsb_cluster
rsb-osb-container.<do-main>.<cluster-name>.http-url (Cluster port is the port of http proxy server)	rsb-osb-container. <i>rsb_domain</i> . <i>rsb_cluster</i> .http-url=http://rsbhost:7004
[PolicyA] rsb-osb-container. <i>rsb_domain</i> . <i>rsb_cluster</i> .https-url (Provide the HTTPS URL of the http proxy managed server)	rsb-osb-container. <i>rsb_domain</i> . <i>rsb_cluster</i> .https-url=https://rsbhost:7104
rsb-osb-container.<do-main>.admin-server-http-url	rsb-osb-container. <i>rsb_domain</i> .admin-server-http-url=http://rsbhost:7001
rsb-osb-container.<do-main>.admin-server-connection-url	rsb-osb-container. <i>rsb_domain</i> .admin-server-connection-url=t3://rsbhost:7001

rsb-osb-container.<do main>.<cluster name>.<managed-serv ers	rsb-osb-container.rsb_ domain.rsb_ cluster.managed-serv ers=rsb_server1,rsb_ server2 (Comma separated list of managed servers in the cluster, excluding the http proxy managed server)
rsb-osb-container.<do main>.<cluster name>.<managed server>.<managed-ser ver-connection-url	rsb-osb-container.rsb_ domain.rsb_ cluster.rsb_ server1.managed-serv er-connection-url=t3: //rsbhost:7002 (Repeat this property for all the managed servers in the cluster)
service-infrastructure -db.jdbc-url	jdbc:oracle:thin:@dbh ost:1521:rra1
edge-app-container.< app>.connection-url	edge-app-container.si m.connection-url=t3: //edgeapphost:8080 (the host:port of the edge application)
global.app-service-en d-point-url-pattern	http://<HTTP_ HOSTNAME>:<HTT P_ PORT>/<SERVICE_ NAME>Service/<SE RVICE_NAME>Bean
(The pattern of edge service URLs. Note: This is different if the service is hosted on glassfish Vs WebLogic)	
rib.home.path (optional)	rib1@ribhost:/u00/rib 1/rib2/Rib1400ForAl l14xxApps/rib-home

Compile

Task	Notes	Command
1. [Policy A] [PolicyB] Security Configuration	Download edge app service WSDLs	cd rsb-home/service-a ssembly-home/bin/ download-app-servi ce-wsdl.sh
2. [PolicyA] [PolicyB] Create Policy Mapping file	Create security policy mapping file	generate-rsb-decor ator-security-conf ig.sh
3. [PolicyB] Setup Credentials	Setup security credentials for Message Protection	setup-message-prot ection-security-cr edentials.sh

4. Setup credentials and compile	Setup the user IDs and passwords in the wallet file <ul style="list-style-type: none"> ■ admin-server-user-alias ■ sidb-jdbc-user-alias ■ rsb-admin-user-alias 	cd rsb-home/service-assembly-home/bin/ rsb-compiler.sh -setup-security-credential
5. Compile Note: If step 4 is executed, skip this step.	Compile the configurations	cd rsb-home/service-assembly-home/bin/ rsb-compiler.sh

Deploy

Task	Notes	Command
1. Start the servers	Start Admin Server, Proxy Server, Managed Servers	cd <domainHome>/bin startWeblogic.sh startManagedWebLogic.sh <managed server>
2. Prepare WLS	Prepare instrumentation configurations for WebLogic server	cd rsb-home/deployment-home/bin rsb-deployer.sh -prepare-wls
3. Restart Servers	Restart all the servers (Admin + Managed servers)	
4. [PolicyB] Copy script	Copy security scripts to RSB server	cd rsb-home/integration-lib/rsb-tools/scripts scp generate-pki-certificate-keystore-for-osb.sh <user>@<host>:/<domainHome>/config/ scp import-remote-server-public-key-certificate-into-keystore.sh <user>@<host>:/<domainHome>/config/ scp export-server-public-key-certificate-from-keystore.sh <user>@<host>:/<domainHome>/config/

5. [PolicyB] Generate Certs and Key store	Generate private key, public key and key store for the RSB server (To be done in the RSB server) Note: If you are using CA certificates, do not generate certificates. Instead import the certificates to the keystore.	. <domainHome>/bin/setDomainEnv.sh cd <domainHome>/config generate-pki-certificate-keystore-for-osb.sh
6. [PolicyB] Copy app server certificate(s)	Go to <wlsHome>/config of the remote edge app server and export the public key certificate. Copy the certificate file to <wlsHome>/config of the RSB server. The file name must be <remote-host>-certificate.der	Follow RSB Security Guide for instructions to export certificate
7. [PolicyB] Import app server certificate(s)	Import all the edge app server public key certificates to RSB server's key store. If the edge apps are deployed in different servers, import all the certificates to the keystore (To be done in the RSB server)	cd <domainHome>/config import-remote-server-public-key-certificate-into-keystore.sh <app> <remote-host>
		e.g., import-remote-server-public-key-certificate-into-keystore.sh cm <hostname>
8. [PolicyB] Configure RSB Server	Configure the RSB server to use the key store generate in the previous steps	cd rsb-home/deployment-home/bin configure-rsb-app-server-for-security-policy-b.sh
9. [PolicyB] Restart	Restart Admin and Managed Servers	
10. Deploy Decorator	Deploy all the decorators	cd rsb-home/deployment-home/bin rsb-deployer.sh -deploy-all-rsb-service

11. Deploy Injector	Deploy rib4oms injector service	<pre>cd rsb-home/deployment-home/bin rsb-deployer.sh -deploy-rsb-service RibOmsToRsbOmsRouting-ServicesIntegrationFlow.jar</pre>
12. Deploy admin app	Deploy RIC	<pre>cd rsb-home/deployment-home/bin rsb-deployer.sh -deploy-admin-app</pre>
13. [PolicyB] Export OSB certificate	<p>Copy the script from integration-lib</p> <p>Export the certificate, so that it can be used by the service consumers. (To be done in the RSB server)</p>	<pre>cd <wlsHome>/config export-server-public-key-certificate -from-keystore.sh</pre>
14. Restart	Restart all the servers (Admin + Managed servers)	



Appendix: How to Secure Application Service (including JSIT)

Depending on the security configuration chosen for each application (i.e., Policy A or Policy B) various security related configuration changes need to be made in the application side. This must be done prior to the installation of RSB. If the security on the application side is done after RSB installation, some of the steps of RSB deployment will have to redone after the security configuration change in the edge app server. The details steps on how to secure edge app services is given in the RSB Security guide.

Note: For more information, see *RSB Security Guide*.



Appendix: Installation Order

This section provides a guideline for the order in which the Oracle Retail applications should be installed. If a retailer has chosen to use only some of the applications, the order is still valid, less the applications not being installed.

Note: The installation order is not meant to imply integration between products.

Enterprise Installation Order

1. Oracle Retail Merchandising System (RMS), Oracle Retail Trade Management (RTM), Oracle Retail Sales Audit (ReSA). Optional: Oracle Retail Fiscal Management (ORFM)

Note: ORFM is an optional application for RMS if you are implementing Brazil localization.

2. Oracle Retail Service Layer (RSL)
3. Oracle Retail Extract, Transform, Load (RETL)
4. Oracle Retail Active Retail Intelligence (ARI)
5. Oracle Retail Warehouse Management System (RWMS)
6. Oracle Retail Invoice Matching (ReIM)
7. Oracle Retail Price Management (RPM)

Note: During installation of RPM, you are asked for the RIBforRPM provider URL. Since RIB is installed after RPM, make a note of the URL you enter. If you need to change the RIBforRPM provider URL after you install RIB, you can do so by editing the `remote_service_locator_info_ribserver.xml` file.

8. Oracle Retail Allocation
9. Oracle Retail Central Office (ORCO)
10. Oracle Retail Returns Management (ORRM)
11. Oracle Retail Back Office (ORBO)
12. Oracle Retail Store Inventory Management (SIM)

Note: During installation of SIM, you are asked for the RIB provider URL. Since RIB is installed after SIM, make a note of the URL you enter. If you need to change the RIB provider URL after you install RIB, you can do so by editing the `remote_service_locator_info_ribserver.xml` file.

13. Oracle Retail Predictive Application Server (RPAS)
14. Oracle Retail Demand Forecasting (RDF)
15. Oracle Retail Category Management (CM)
16. Oracle Retail Modeling Engine (ORME)
17. Oracle Retail Assortment Space Optimization (OASO)
18. Oracle Retail Replenishment Optimization (RO)
19. Oracle Retail Analytic Parameter Calculator Replenishment Optimization (APC-RO)
20. Oracle Retail Regular Price Optimization (RPO)
21. Oracle Retail Merchandise Financial Planning (MFP)
22. Oracle Retail Size Profile Optimization (SPO)
23. Oracle Retail Assortment Planning (AP)
24. Oracle Retail Item Planning (IP)
25. Oracle Retail Item Planning Configured for COE (IP COE)
26. Oracle Retail Advanced Inventory Planning (AIP)
27. Oracle Retail Integration Bus (RIB)
28. Oracle Retail Service Backbone (RSB)
29. Oracle Retail Financial Integration (ORFI)
30. Oracle Retail Point-of-Service (ORPOS)
31. Oracle Retail Markdown Optimization (MDO)
32. Oracle Retail Clearance Optimization Engine (COE)
33. Oracle Retail Analytic Parameter Calculator for Markdown Optimization (APC-MDO)
34. Oracle Retail Analytic Parameter Calculator for Regular Price Optimization (APC-RPO)
35. Oracle Retail Analytics