

Oracle® Retail Integration Bus

Installation Guide

Release 16.0.21

E87340-01

May 2017

Oracle Retail Integration Bus Installation Guide, Release 16.0.21

E87340-01

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

Primary Author: Sanal Parameswaran

Contributing Author: Gloreen Soans

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Value-Added Reseller (VAR) Language

Oracle Retail VAR Applications

The following restrictions and provisions only apply to the programs referred to in this section and licensed to you. You acknowledge that the programs may contain third party software (VAR applications) licensed to Oracle. Depending upon your product and its version number, the VAR applications may include:

- (i) the **MicroStrategy** Components developed and licensed by MicroStrategy Services Corporation (MicroStrategy) of McLean, Virginia to Oracle and imbedded in the MicroStrategy for Oracle Retail Data Warehouse and MicroStrategy for Oracle Retail Planning & Optimization applications.
- (ii) the **Wavelink** component developed and licensed by Wavelink Corporation (Wavelink) of Kirkland, Washington, to Oracle and imbedded in Oracle Retail Mobile Store Inventory Management.
- (iii) the software component known as **Access Via**[™] licensed by Access Via of Seattle, Washington, and imbedded in Oracle Retail Signs and Oracle Retail Labels and Tags.
- (iv) the software component known as **Adobe Flex**[™] licensed by Adobe Systems Incorporated of San Jose, California, and imbedded in Oracle Retail Promotion Planning & Optimization application.

You acknowledge and confirm that Oracle grants you use of only the object code of the VAR Applications. Oracle will not deliver source code to the VAR Applications to you. Notwithstanding any other term or condition of the agreement and this ordering document, you shall not cause or permit alteration of any VAR

Applications. For purposes of this section, "alteration" refers to all alterations, translations, upgrades, enhancements, customizations or modifications of all or any portion of the VAR Applications including all reconfigurations, reassembly or reverse assembly, re-engineering or reverse engineering and recompilations or reverse compilations of the VAR Applications or any derivatives of the VAR Applications. You acknowledge that it shall be a breach of the agreement to utilize the relationship, and/or confidential information of the VAR Applications for purposes of competitive discovery.

The VAR Applications contain trade secrets of Oracle and Oracle's licensors and Customer shall not attempt, cause, or permit the alteration, decompilation, reverse engineering, disassembly or other reduction of the VAR Applications to a human perceivable form. Oracle reserves the right to replace, with functional equivalent software, any of the VAR Applications in future releases of the applicable program.

Contents

Send Us Your Comments	ix
Preface	xi
Audience	xi
Customer Support	xi
Review Patch Documentation	xi
Improved Process for Oracle Retail Documentation Corrections	xi
Oracle Retail Documentation on the Oracle Technology Network	xii
Conventions	xii
1 Introduction	
RIB Installation Master Checklist	1-1
Technical Specifications	1-2
Requesting Infrastructure Software.....	1-3
Check Server Requirements.....	1-3
Additional Requirement if using Oracle RIB Hospital Administration (RIHA)	1-6
Other Resources	1-6
RIB Integration Gateway Services (IGS) Supported Operating Systems.....	1-6
RIB and Oracle Database Cluster (RAC)	1-6
RIB and Oracle WebLogic Server Cluster	1-7
2 Preinstallation Tasks	
Determine the UNIX User Account to Install the Software	2-1
rib-home Directory	2-1
Prepare WebLogic Application Server for RIB Components	2-2
Create the RIB Managed Server Instances.....	2-2
Install NodeManager	2-4
Expand the RIB Kernel Distribution.....	2-7
Configure the rib-<app>-server	2-7
3 Database Installation Tasks	
Oracle Database Schemas	3-1
RIB and Multi byte Deployments	3-1
Verify that Correct RIB Hospital Database Objects are Installed in the Retail Application's Schema	3-1

Verify that Database XA Resources are Configured for RIB	3-2
Verify that Correct RIB Functional Artifacts Database Objects Are Installed in PL/SQL Applications Database Schema	3-2
Create RIB TAFR RIB Hospital	3-3
Prepare Oracle AQ JMS Provider.....	3-4
RIB and AQ JMS Database Processes.....	3-4
4 Run the RIB Application Installer	
RIB Application Installer Tasks	4-1
How to Run the RIB Application Installer.....	4-1
Check the Log Files to Ensure Installation was Successful	4-4
Preinstallation Steps for Multiple JMS Server Setup	4-4
Preinstallation Steps for Configuring rib-ext	4-5
Run RDMT to Verify the Installation	4-5
Backups and Logs Created by the Installer.....	4-5
Resolving Installation Errors	4-6
5 Post-Installation Tasks	
Secure Filesystem	5-1
Oracle Application Tasks	5-1
RDMT Installation.....	5-1
Installation Steps.....	5-2
Information to Gather for Installation in Remote Server	5-2
RIB Hospital Administration Tool.....	5-3
6 Retail Integration Console Installation Tasks	
Prerequisites	6-1
Deployment Steps	6-1
7 Integration Gateway Services Installation Tasks	
Prerequisites	7-1
Prepare Oracle WebLogic Server.....	7-1
Create the RIB IGS WebLogic Managed Server.....	7-1
Prepare Integration Gateway Services (IGS)	7-2
Running IGS under \$RIB_HOME.....	7-2
Verify the IGS Application Installation Using the Administration Console.....	7-4
Secure IGS Web Services Using the Administration Console	7-4
Server-side Setup for User Name and Password Authentication.....	7-4
Attach Policy File to the Web Service	7-4
Create Roles and Users.....	7-12
Client-side Setup for User Name and Password Authentication	7-27
Server-side Setup for Encrypted User Name and Password Token Authentication	7-29
Client-side Setup for Encrypted User Name and Password Token Authentication.....	7-32

8 RIB Security

Security in RIB Application Builder	8-1
Security in RIB Deployment Configuration File Editor	8-2
Security during RIB Deployment Process	8-2
Security during RIB Runtime	8-2
RIB Administration Security	8-2
RIB Application Administrators Security Domain	8-3
Multiple User Configuration	8-3
RIB System Administrators Security Domain	8-3
Security in RIHA	8-3
Security in RDMT	8-4
Security in PL/SQL Application API Stubs	8-4
Security in Integration Gateway Services	8-4
SSL Configuration	8-4

A Appendix: RIB Application Installer Screens

B Appendix: RIB Installer Common Errors

Unreadable Buttons in the Installer	B-1
Warning: Could not Create System Preferences Directory	B-1
ConcurrentModificationException in Installer GUI	B-1
Warning: Could Not Find X Input Context	B-2
Message: Problem Occurred during Parsing Input XML Files	B-2
rib-app-builder Hangs if a User is Logged in to the Administration Console during Deployment	B-2

C Appendix: RIB Installation Checklists

RIB Installation Master Checklist	C-1
Prerequisite - Prepare WebLogic Server for RIB Components	C-2
Prerequisite - Oracle Database Schemas	C-7
Prerequisite - Prepare Oracle AQ JMS Provider	C-8
Install Using the RIB Installer GUI	C-11
Install Using the RIB App Builder Command Line Tools	C-12
RDMT - Information to Gather	C-17
RDMT - Installation	C-18
RIB Hospital Administration (RIHA) - Installation	C-19
Integration Gateway Services (IGS) Installation - Information to Gather	C-21
IGS - Installation (Optional)	C-21
IGS - Verify Installation	C-22

D Appendix: Changing the RIB Admin GUI Password

Procedure	D-1
-----------------	-----

E Appendix: configWss.py

F Appendix: RIB Domain Configuration for Policy A

RIB Domain Creation Template Options F-1

G Appendix: Installation Order

Enterprise Installation Order G-1

Send Us Your Comments

Oracle Retail Integration Bus Installation Guide, Release 16.0.21

Oracle welcomes customers' comments and suggestions on the quality and usefulness of this document.

Your feedback is important, and helps us to best meet your needs as a user of our products. For example:

- Are the implementation steps correct and complete?
- Did you understand the context of the procedures?
- Did you find any errors in the information?
- Does the structure of the information help you with your tasks?
- Do you need different information or graphics? If so, where, and in what format?
- Are the examples correct? Do you need more examples?

If you find any errors or have any other suggestions for improvement, then please tell us your name, the name of the company who has licensed our products, the title and part number of the documentation and the chapter, section, and page number (if available).

Note: Before sending us your comments, you might like to check that you have the latest version of the document and if any concerns are already addressed. To do this, access the new Applications Release Online Documentation CD available on My Oracle Support and www.oracle.com. It contains the most current Documentation Library plus all documents revised or released recently.

Send your comments to us using the electronic mail address: retail-doc_us@oracle.com

Please give your name, address, electronic mail address, and telephone number (optional).

If you need assistance with Oracle software, then please contact your support representative or Oracle Support Services.

If you require training or instruction in using Oracle software, then please contact your Oracle local office and inquire about our Oracle University offerings. A list of Oracle offices is available on our Web site at www.oracle.com.

Preface

Oracle Retail Installation Guides contain the requirements and procedures that are necessary for the retailer to install Oracle Retail products.

Audience

The Installation Guide is written for the following audiences:

- Database administrators (DBA)
- System analysts and designers
- Integrators and implementation staff

Customer Support

To contact Oracle Customer Support, access My Oracle Support at the following URL:

<https://support.oracle.com>

When contacting Customer Support, please provide the following:

- Product version and program/module name
- Functional and technical description of the problem (include business impact)
- Detailed step-by-step instructions to re-create
- Exact error message received
- Screen shots of each step you take

Review Patch Documentation

When you install the application for the first time, you install either a base release (for example, 16.0) or a later patch release (for example, 16.0.21). If you are installing the base release and additional patch releases, read the documentation for all releases that have occurred since the base release before you begin installation. Documentation for patch releases can contain critical information related to the base release, as well as information about code changes since the base release.

Improved Process for Oracle Retail Documentation Corrections

To more quickly address critical corrections to Oracle Retail documentation content, Oracle Retail documentation may be republished whenever a critical correction is

needed. For critical corrections, the republication of an Oracle Retail document may at times not be attached to a numbered software release; instead, the Oracle Retail document will simply be replaced on the Oracle Technology Network Web site, or, in the case of Data Models, to the applicable My Oracle Support Documentation container where they reside.

This process will prevent delays in making critical corrections available to customers. For the customer, it means that before you begin installation, you must verify that you have the most recent version of the Oracle Retail documentation set. Oracle Retail documentation is available on the Oracle Technology Network at the following URL:

<http://www.oracle.com/technetwork/documentation/oracle-retail-100266.html>

An updated version of the applicable Oracle Retail document is indicated by Oracle part number, as well as print date (month and year). An updated version uses the same part number, with a higher-numbered suffix. For example, part number E123456-02 is an updated version of a document with part number E123456-01.

If a more recent version of a document is available, that version supersedes all previous versions.

Oracle Retail Documentation on the Oracle Technology Network

Oracle Retail product documentation is available on the following web site:

<http://www.oracle.com/technetwork/documentation/oracle-retail-100266.html>

(Data Model documents are not available through Oracle Technology Network. You can obtain these documents through My Oracle Support.)

Conventions

The following text conventions are used in this document:

Convention	Meaning
boldface	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
monospace	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

Introduction

This manual details the installation of the Retail Integration Bus (RIB). Generally, a RIB installation contains the following components:

- An installation of the Retail Integration RIB Hospital administration (RIHA) tool.
- An installation of the RIB Diagnostics and Monitoring tools.

The RIB includes an optional component, the RIB Integration Gateway Services (IGS) that can be installed as a subsystem to the core RIB. The IGS should be installed after the core RIB components have been successfully installed and tested.

Note: See the “Integration Gateway Services” section in Chapter 3, “Core Concepts,” in the *Oracle Retail Integration Bus Implementation Guide* before attempting installation.

It is important to also follow all installation steps of the Oracle Retail Applications that are being connected to the RIB. Failure to follow these may result in a faulty RIB installation. See the installation guides for the relevant Oracle Retail applications for more information.

Note: The instructions provided in this guide apply to a full installation of the RIB. The RIB 16.0.21 application cannot be installed over an existing version, such as 15.x.x.

RIB Installation Master Checklist

This list covers all of the sequential steps required to perform a full installation of the RIB, using either the GUI RIB Installer (strongly recommended) or a command line installation.

Task	Notes
Prepare the Oracle WebLogic Servers for installation of the RIB Components.	Prerequisite
Prepare the Oracle Database schemas that the RIB will use.	Prerequisite
Prepare the JMS.	Prerequisite
Verify the Applications to which RIB will be integrating are configured appropriately.	

Task	Notes
Information to gather for the Installation	During the prerequisites steps, there is information that should be noted that will be used to configure the RIB during the installation process.
Install the RIB using one of these methods: Installation using the RIB Installer GUI or Installation using the RIB App Builder Command Line Tools.	It is strongly recommended that the RIB Installer GUI method be used.
Verify Application URL settings match RIB installation.	RIB Functional Artifact URL JNDI URL
Complete the setup of RDMT using the same Information to Gather for the Installation.	During either of the installation methods, one of the manual steps will have extracted the RDMT tools to the appropriate directory.
Verify the RIB installation using the RDMT tools.	
Install RIHA.	The RIB Hospital maintenance tool

Note: See [Appendix C](#), “RIB Installation Checklists,” while performing the installation to minimize the chance of errors.

The RIB Integration Gateway Services (IGS) is an optional component and should be installed after the installation and verification of the RIB components.

Task	Notes
Prepare the WebLogic application servers for installation of the IGS component.	This is a mandatory prerequisite.
Information to gather for the Installation	During the RIB component prerequisites steps, there is information that should be noted that will be used to configure the IGS during the installation process.
Install the IGS.	
Verify the IGS installation using the Soap UI tool and test cases.	See Chapter 4 of the <i>Oracle Retail Integration Bus Operations Guide</i> .

Note: See [Appendix C](#), “RIB Installation Check Lists,” while performing the installation to minimize the chance of errors.

Technical Specifications

The RIB and Integration Gateway Services have several dependencies on Oracle Retail Application installations, as well as on the Oracle WebLogic Servers. This section covers these requirements.

Requesting Infrastructure Software

If you are unable to find the necessary version of the required Oracle infrastructure software (database server, application server, WebLogic, etc.) on the Oracle Software Delivery Cloud, you should file a non-technical 'Contact Us' Service Request (SR) and request access to the media. For instructions on filing a non-technical SR, see My Oracle Support Note 1071023.1 - *Requesting Physical Shipment or Download URL for Software Media*.

Check Server Requirements

Note: Oracle Retail assumes that the retailer has applied all required fixes for supported compatible technologies.

Supported On	Versions Supported
Database Server OS	<p>OS certified with Oracle Database 12c (12.x) Enterprise Edition. Options are:</p> <ul style="list-style-type: none"> ■ Oracle Linux 6 or 7 for x86-64 (Actual hardware or Oracle virtual machine). ■ Red Hat Enterprise Linux 6 or 7 for x86-64 (actual hardware or Oracle virtual machine) ■ IBM AIX 7.1 (actual hardware or LPARs) ■ Solaris 11.2 SPARC (actual hardware or logical domains) ■ HP-UX 11.31 Integrity (actual hardware, HPVM, or vPars)

Supported On	Versions Supported
Database Server 12cR1	<p>Oracle Database Enterprise Edition 12cR1 (12.1.0.2) with the following specifications:</p> <p>Components:</p> <ul style="list-style-type: none"> ▪ Oracle Partitioning ▪ Examples CD <p>Oneoffs:</p> <ul style="list-style-type: none"> ▪ 20846438: ORA-600 [KKPAPXFORMFKK2KEY_1] WITH LIST PARTITION ▪ 19623450: MISSING JAVA CLASSES AFTER UPGRADE TO JDK 7 ▪ 20406840: PROC 12.1.0.2 THROWS ORA-600 [17998] WHEN PRECOMPILING BY 'OTHER' USER ▪ 20925154: ORA-39126: WORKER UNEXPECTED FATAL ERROR IN KUPW\$WORKER GATHER_PARSE_ITEMS JAVA ▪ 19672263: Patch 19672263: GTT SESSION LEVEL STATISTICS RETURNS ORA-20006 <p>RAC only:</p> <ul style="list-style-type: none"> ▪ 21260431: APPSST 12C: GETTING ORA-4031 AFTER 12C UPGRADE ▪ 21373473: INSTANCE TERMINATED AS LMD0 AND LMD2 HUNG FOR MORE THAN 70 SECS <p>Other Components:</p> <ul style="list-style-type: none"> ▪ Perl interpreter 5.0 or later ▪ X-Windows interface ▪ JDK 1.8 with latest security updates
AQ JMS Server	Oracle Database 12cR1
Application Server OS	<p>OS certified with Oracle Fusion Middleware 12.2.1.2. Options are:</p> <ul style="list-style-type: none"> ▪ Oracle Linux 6 for x86-64 (Actual hardware or Oracle virtual machine). ▪ Red Hat Enterprise Linux 6 for x86-64 (actual hardware or Oracle virtual machine) ▪ IBM AIX 7.1 (actual hardware or LPARs) ▪ Solaris 11.2 Sparc (actual hardware or logical domains) ▪ HP-UX 11.31 Integrity (actual hardware, HPVM, or vPars)

Supported On	Versions Supported
Application Server	Oracle Fusion Middleware 12.2.1.2 Components: <ul style="list-style-type: none"> ▪ Oracle WebLogic Server 12.2.1.2 Note: WebLogic 12c domain for RIB needs JRF to be installed. Choose the JRF option at the domain creation. JRF needs an RCU schema for its runtime. This schema must be created prior to domain creation using the RCU tool. Java: <ul style="list-style-type: none"> ▪ JDK 1.8.0+ 64 bit with latest security updates Patch: WLS patch 22648025 is a required patch for WebLogic 12.2.1. This patch resolves java.lang.IllegalStateException which occurs on accessing EJB bean, which is exposed as a web service.
Minimum required JAVA version for all operating systems	Java: JDK 1.8.0+ 64 bit with latest security updates

Note: By default, JDK is at 1.7. After installing the rdbms binary, apply patch 19623450. Then follow the instructions on *Oracle Database Java Developer's Guide 12c (12 x) Release 1* to change JDK to 1.8 with latest security updates. The document is available at:

<http://docs.oracle.com/database/121/JJDEV/chone.htm#JJDEV0100>.

Follow-through to complete the post-patch operation.

Note: Use GNU Tar when installing on AIX as other utilities fail when extracting the RIB tarballs.

Note: Bash shell is supported. Using other shells could have adverse effects.

Important: If there is an existing WebLogic installation on the server, you must upgrade to WebLogic 12.2.1.2. All middleware components associated with WebLogic server should be upgraded to 12.2.1.2.

Back up the weblogic.policy file (\$WLS_HOME/wlserver/server/lib) before upgrading your WebLogic server, because this file could be overwritten. Copy over the weblogic.policy backup file after the WebLogic upgrade is finished and the post patching installation steps are completed.

Additional Requirement if using Oracle RIB Hospital Administration (RIHA)

The RIHA model and view components require ADF runtime to run properly. Verify that ADF runtime 12.2.1 or higher is available in the WebLogic Application Server (12.2.1.2) and applied to the domain where RIHA will be installed.

Other Resources

For information about WebLogic Application Server 12.2.1.2, see the Oracle WebLogic Server Documentation Library:

<http://docs.oracle.com/middleware/12212/wls/index.html>

Note: See also the Oracle Database Administrator's Guide 12c (12.x) and the Oracle WebLogic Application Server 12.2.1.2 documentation.

RIB Integration Gateway Services (IGS) Supported Operating Systems

Supported On	Version Supported
Oracle WebLogic Server OS	OS certified with Oracle Fusion Middleware 12.2.1.2. Options are: <ul style="list-style-type: none"> ▪ Oracle Linux 6 or 7 for x86-64 (Actual hardware or Oracle virtual machine) ▪ Red Hat Enterprise Linux 6 or 7 for x86-64 (Actual hardware or Oracle virtual machine) ▪ IBM AIX 7.1 (Actual hardware or LPARs) ▪ Solaris 11.2 Sparc (Actual hardware or logical domains) ▪ HP-UX 11.31 Integrity (Actual hardware or HPVM)
Oracle WebLogic Server	Oracle WebLogic Server 12.2.1.2

RIB and Oracle Database Cluster (RAC)

In this release, rib-<app> uses Oracle Streams AQ as the JMS provider. Oracle Streams AQ is built on top of Oracle database system. Because AQ is hosted by the Oracle database system, RIB can take advantage of database RAC capability for its JMS provider. By using RAC AQ as RIB's JMS provider, you can scale RIB's JMS server vertically and horizontally to meet any retailer's scalability and high availability need.

At runtime, rib-<app> uses the database for keeping track of its RIB Hospital records. These RIB Hospital tables can be hosted by an Oracle RAC database providing high availability and scalability for these RIB Hospital records.

All rib-<app>s use the Oracle type 4 Java Database Connectivity (JDBC) driver to connect to the RIB Hospital database and the AQ JMS server. When the RIB Hospital database and the AQ JMS servers are hosted by an Oracle RAC database, the only configuration change required in rib-<app> is the RAC JDBC connection URL.

Note: RIB supports only the use of the Oracle Type 4 Thin Java Database Connectivity (JDBC) driver (ojdbc7.jar) for all JDBC connections, including RAC.

RIB and Oracle WebLogic Server Cluster

RIB uses JMS server for message transportation between the integrating retail applications. Because RIB must preserve the message publication and subscription ordering, rib-<app>s deployed in Oracle WebLogic Server cannot be configured in an active-active cluster mode. In active-active cluster mode, multiple subscribers and publishers will process messages simultaneously and there will be no way to preserve message ordering.

The rib-<app> can be deployed to a single instance of an Oracle WebLogic server that is clustered (active-passive). In this configuration, even though rib-<app> is deployed in a WebLogic cluster, multiple instances of the same rib-<app> are not running at the same time, as there is only one WebLogic instance where the rib-<app> is deployed. So RIB can still preserve message ordering.

To truly configure rib-<app>s for high availability, the only option is to configure it in active-passive mode.

Preinstallation Tasks

Before you begin the installation process, read the *Oracle Retail Integration Bus Implementation Guide* to plan a RIB deployment.

Planning may include the decision to employ multiple JMS servers, which can isolate flows for performance and operational QoS. For information, see "[Preinstallation Steps for Multiple JMS Server Setup](#)" in this guide.

Determine the UNIX User Account to Install the Software

The user account that installs RIB is an important consideration. Options, pros, and cons are discussed in the *Oracle Retail Integration Bus Implementation Guide*.

Note: See the "Pre-Implementation Considerations" in the *Oracle Retail Integration Bus Implementation Guide*.

rib-home Directory

The RIB software components can be distributed across multiple application servers depending on the deployment option selected, but they are centrally configured and managed.

Note: See the section, "Recommended Deployment Option," in the *Oracle Retail Integration Bus Implementation Guide*.

The location from which all rib-<app> applications are managed is known as rib-home. This directory location (rib-home) contains all the tools and configurations to manage the life cycle and operations of the RIB installation across the enterprise. There must be one rib-home directory for each development, test and production environment. The rib-home directory is not a staging (throw away) directory. It must be available at all times to support the lifecycle management of the RIB system. After initial configuration of the Database server and the Java EE application server, all rib-<app> application level work must be done only from the rib-home directory location.

Note: See the section, "RIB Software Life Cycle," in the *Oracle Retail Integration Bus Implementation Guide*.

Prepare WebLogic Application Server for RIB Components

This section describes the process of preparing the Oracle WebLogic servers to install the rib-`<app>` Java EE application.

Create the RIB Managed Server Instances

All RIB components are Java EE and run in WebLogic managed server instances in the WebLogic Application Server. The rib-`<app>` Java EE application runs in its own managed server instance called rib-`<app>`-server. Each rib-`<app>` application requires a separate managed server instance that is not shared with any other application. All managed servers can be under one domain. It is a new requirement for 16.0 that the WLS domain for RIB deployment must be a JRF domain. JRF needs RCU.

WebLogic 12.2.1.2, needs OWSM for Policy A and C to work.

The OWSM template choice while creating the wls domain, will give an option to deploy wsm-pm application to admin server. This app is required for policies to work. Ensure that wsm-pm is targeted to the admin server and all the managed servers where rib-`<app>` Java EE applications are going to be deployed.

If http ports are disabled in the server, then wsm-pm app will not be reachable, unless it's configured to use SSL port. To configure SSL ports for wsm-pm, EM has to be deployed.

Note: For additional information about configuring the RIB Domain, see [Appendix F, "Appendix: RIB Domain Configuration for Policy A"](#).

Use the following steps to create a new managed server instance for rib-`<app>` and configure it to RIB requirement.

Note: For information about using commands to create a managed server instance, see the WebLogic Application Server Administrator's Guide 12.2.1.2.

Acceptable values for `<app>` are rms, rwms, tafr, sim, rpm, aip, oms, rxm, ext, and rfm.

There is one RIB specific managed server instance that must be created regardless of the other application deployment choices.

- rib-func-artifact-server. (This naming convention is recommended, but not required.)

There is one RIB specific managed server instance that must be created depending on the deployment configuration. If RMS is installed with RWMS and/or SIM, the TAFRs must be installed.

- rib-tafr-server. (It is recommended, but not required, that this naming convention be followed).

The following is a list of optional application instances, depending on deployment choices. It is recommended, but not required, that you use the following naming convention:

- rib-aip-server
- rib-rfm-server

- rib-rms-server
- rib-rpm-server
- rib-rwms-server
- rib-oms-server
- rib-sim-server
- rib-rxm-server
- rib-ext-server


Note: See Oracle WebLogic Server 12.2.1.2 documentation for more details on How to Create managed servers.

To create the rib<app>server, complete the following steps:

1. Log in to the WebLogic administration console GUI (<http://<host>:<port>/console>) as administrator.
2. Using the left side menu, navigate to Environment > Servers.




3. Click **Lock & Edit**.

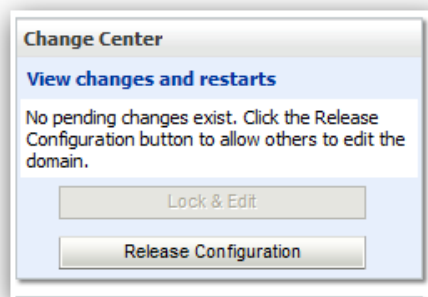

4. Click **New**.
5. Enter the name, port, and listen address of the server instance to be created.

For example:

- Server Name: rib-<app>-server
- Server Listen Address: <server-name>
- Server Listen Port: <listen-port>

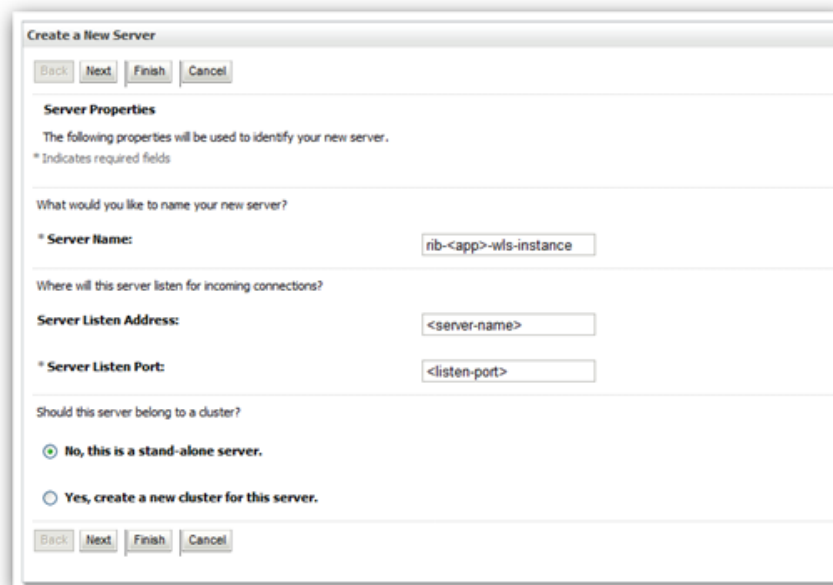


6. Click **Next**. Click **Finish**. Make sure you see this instance listed under Servers


Install NodeManager

Install NodeManager if it was not created during domain install. NodeManager is required so that the managed servers can be started and stopped through the administration console. Only one NodeManager is needed per WebLogic installation.

1. Log in to the administration console.
2. Click **Lock & Edit** and navigate to Environments> Machines.

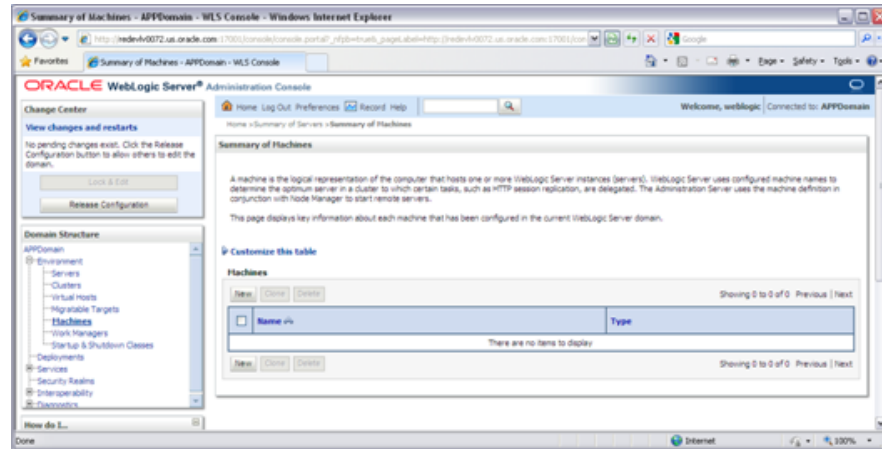

3. Click **New**.

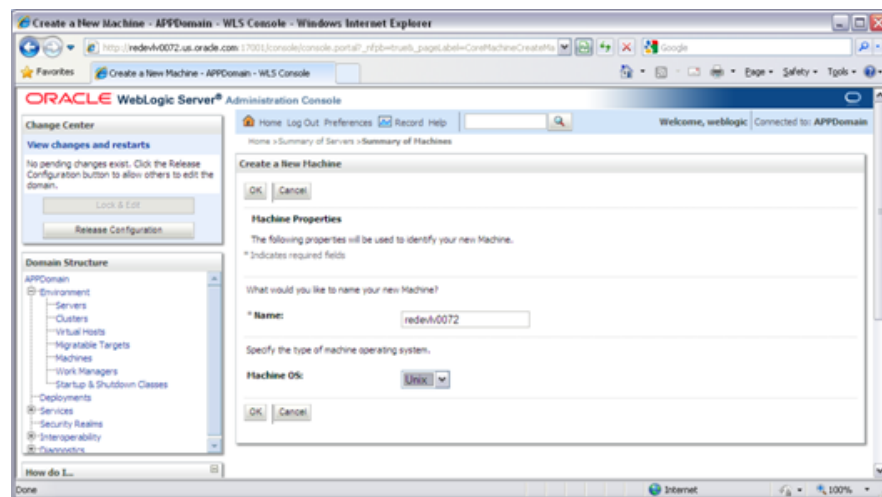


4. Set the following variables:

- Name: Logical machine name
- Machine OS: UNIX


5. Click **Next**.

6. Update the details below and click the **Finish** button.

- **Type:** Plain
- **Listen Address:** For example, ribhost.example.com
- **Listen Port:** Default port (for example, 5556) or any available port

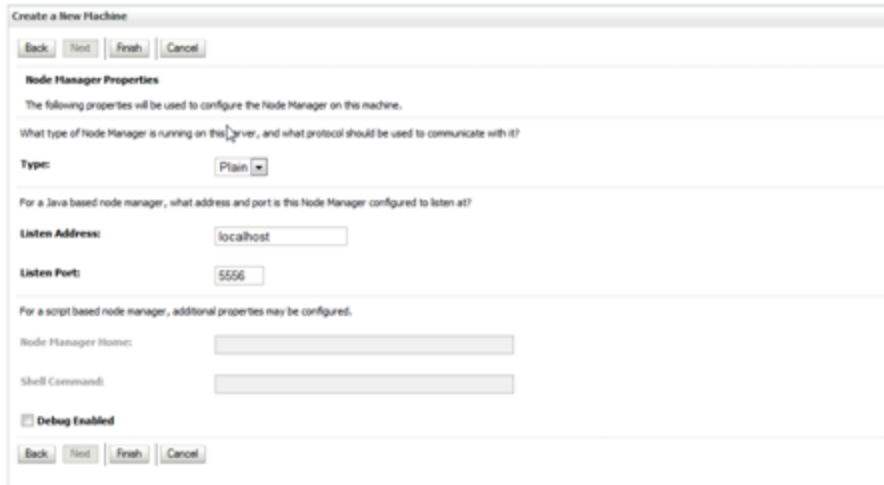

7. Click **Activate Changes**.
8. Click **Lock & Edit**.
9. Navigate to **Environments > machines**. Click on the machine name and select the **Servers** tab.

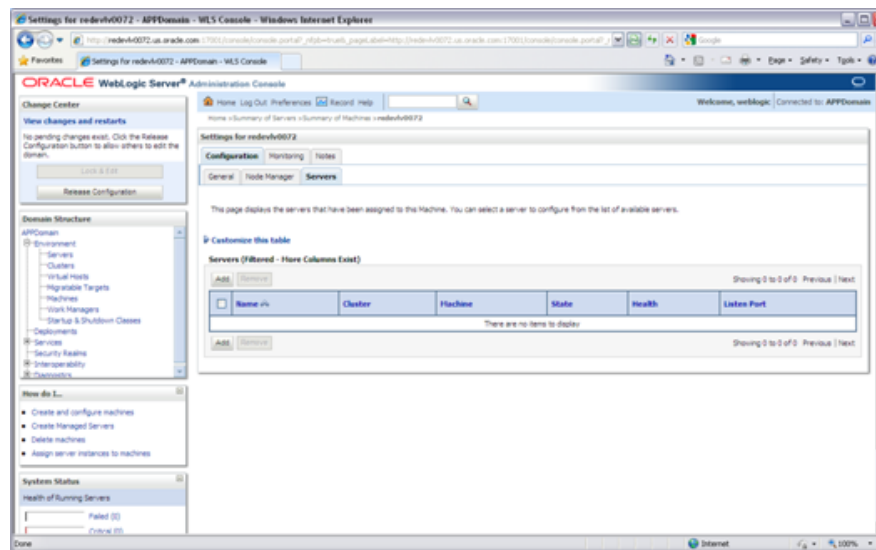

10. Add the managed servers that need to be configured with NodeManager. Save the changes.
11. Click **Add** to repeat for additional servers.
12. Click **Activate Changes**.
13. Start NodeManager from the server using the `startNodeManager.sh` at `$WLS_HOME/wlserver/server/bin`.

Note: To activate changes, the server must be stopped: `$WLS_HOME/user_projects/domains/<RIB_Domain>/bin/stopManagedWebLogic.sh <rpm>-server ${server_name}:${server_port}`

14. Edit the nodemanager.properties file at the following location with the below values:

```
$WLS_HOME/user_projects/domains/<RIB_
Domain>/nodemanager/nodemanager.properties
```

- SecureListener=false
 - StartScriptEnabled=true
 - StartScriptName=startWebLogic.sh
15. NodeManager must be restarted after making changes to the nodemanager.properties file.

Note: The nodemanager.properties file is created after NodeManager is started for the first time. It will not be available before that point.

Expand the RIB Kernel Distribution

To expand the RIB kernel distribution, complete the following steps:

1. Log in to the UNIX server as the user who will own the RIB development workspace. Create a new directory for the workspace. There should be a minimum of 800 MB of disk space available.
2. Copy the RIB Kernel package (RibKernel16.0.21ForAll16.x.xApps_eng_ga.jar) into the workspace and extract its contents.
3. Extract the jar file using this command:

```
$JAVA_HOME/bin/jar -xf RibKernel16.0.21ForAll16.x.xApps_eng_ga.jar
```
4. Change directories to Rib16021ForAll16xxApps/rib-home. This location will be referred to as <RIB_HOME> for the remainder of this chapter.

Configure the rib-<app>-server

To configure the rib-<app>-wls-instance, complete the following steps.

1. Configure the startup script
 - a. Take a backup of the script \$DOMAIN_HOME/base_domain/bin/startWebLogic.sh
 - b. Edit the script \$DOMAIN_HOME/base_domain/bin/startWebLogic.sh to add the following attributes. The attributes must be added before the call to start the server.
2. Update \$WLS_HOME/<wls>/server/lib/weblogic.policy file with the information below.

Note: If copying the following text from this guide to UNIX, ensure that it is properly formatted in UNIX. Each line entry beginning with “permission” must terminate on the same line with a semicolon.

Note: <WEBLOGIC_DOMAIN_HOME> in the following example is the full path of the Weblogic Domain, <managed_server> is the RIB managed server created, and <context_root> correlates to the value entered for the application deployment name/context root of the application that you will supply during installation. Note that the rib-func-artifact-instance does not need to get added to this file. See the example below. There should not be any space between file:<WEBLOGIC_DOMAIN_HOME>.

Note: The path tmp/_WL_user/rib-<app>.ear will not be available before the deployment.

```
grant codeBase "file:
<WEBLOGIC_DOMAIN_HOME>/servers/<managed_server>/tmp/_WL_user/<context_root>/-"
{
permission java.security.AllPermission;
permission oracle.security.jps.service.credstore.CredentialAccessPermission "
credstoressp.credstore", "read,write,update,delete";
permission oracle.security.jps.service.credstore.CredentialAccessPermission "
credstoressp.credstore.*", "read,write,update,delete";
};
```

An example of the full entry that might be entered is:

```
grant codeBase "file: /u00/webadmin/product/ 16.0.21_RIB/WLS/user_
projects/domains/RIBDomain/servers/rib-rwms-server/tmp/_WL_user/rib-rwms.ear/-"
{
permission java.security.AllPermission;
permission oracle.security.jps.service.credstore.CredentialAccessPermission
"credstoressp.credstore", "read,write,update,delete"
;
permission oracle.security.jps.service.credstore.CredentialAccessPermission
"credstoressp.credstore.*", "read,write,update,delete";
};
```

Note: Add the path to the patch jars. If any patches are installed into WLS (now or in the future) and this line is not included it could cause the RIB to fail. WLS_HOME refers to the location where Weblogic 12.2.1.2 has been installed.

For example:

```
grant codeBase "file:<WLS_HOME>/patch_wls/patch_jars/-" {
permission java.security.AllPermission;
permission
oracle.security.jps.service.credstore.CredentialAccessPermission
"credstoressp.credstore", "read,write,update,delete";
permission
oracle.security.jps.service.credstore.CredentialAccessPermission
"credstoressp.credstore.*", "read,write,update,delete";
};

};
```

The AdminServer needs to be bounced after the weblogic.policy file is modified.

3. Start rib-<app>managed server.

WebLogic managed servers where rib-<app> is deployed can be started two ways.

Option 1: Run startup scripts through the command line

1. Log in to the machine where WLS was installed with the operating system user that was used to install the WebLogic Application Server (WLS).
2. Navigate to DOMAIN_HOME/bin.

For example:

```
$cd product/16.0.21_RIB/WLS/user_projects/domains/RIBDomain/bin
```

3. Run the startManagedWebLogic script.

For example:

```
sh startManagedWebLogic.sh rib-rms-wls-instance
```

Option 2: Start WebLogic using administration console.

NodeManager must be running for starting managed server from the console. The nodemanager.properties and startWeblogic.sh must be configured with the properties that have been mentioned above. (See steps 1 and 3 above.)

Note: RIB applications cannot be deployed from the administration console. They must be run through the installer GUI or on the command line.

1. Log in to the WebLogic administration console GUI (<http://<host>:<port>/console>) as administrator
2. Using the right side menu, navigate to Environment > Servers
3. Click rib-<app> managed server.
4. Click the **Control** tab.
5. Select the managed server instance that must be started.
6. Click **Start**.
7. Repeat this procedure for all rib-<app>managed servers.

Database Installation Tasks

There are several tasks that must be performed for RIB and verified in the participating applications.

Oracle Database Schemas

Each Oracle Retail Application has an associated set of RIB Artifacts that must be installed as part of the RIB integration (for example, the RIB Hospital Tables, CLOB API libraries, and Oracle Objects).

- Ensure that these have been installed appropriately, per the individual applications.
- Ensure that the TAFR Hospital user and objects exist.
- Ensure that the RIB user has appropriate access and permissions.

RIB and Multi byte Deployments

If RIB is deployed in an environment where multi byte characters are used in the message data, there are considerations that must be understood. Improper database setup can lead to error messages indicating the inability to insert values that are too long.

Note: See the section, “Pre-Implementation Considerations for Multi byte Deployments,” in the *Oracle Retail Integration Bus Implementation Guide*.

These considerations are beyond the scope of the RIB documentation and should be discussed with the site Database Administration team prior to installation.

Verify that Correct RIB Hospital Database Objects are Installed in the Retail Application's Schema

Every rib-<app> application needs a database schema that contains the RIB Hospital tables. Externalizing the RIB Hospital tables from the application database schema is supported.

There are two options:

- rib-<app> can use the respective application database schema to host the RIB hospital tables.

- rib-<app> can have a separate database or a separate schema to host the RIB hospital tables.

Note: The RIB Hospital schema must not be shared across retail applications. Each rib-<app> should have its own RIB hospital tables in both of the options listed above.

These RIB Hospital tables are not installed as part of the RIB installation, but they are installed as part of the Retail applications database schema installation. Verify that the four RIB Hospital tables are already installed in the respective database schema.

Note: See [Appendix C](#), “RIB Installation Checklists.”

The database schema for all retail applications must have the database objects defined in the RIB delivered kernel SQL script called 1_KERNEL_CREATE_OBJECTS.SQL.

Note: The 1_KERNEL_CREATE_OBJECTS.SQL script is available in the rib-private-kernel-database-library-<version>.jar file. The rib-private-kernel-database-library-<version>.jar can be found in the rib-home directory structure (/Rib16021ForAll16xxApps/rib-home/integration-lib).

Note: See the section, “RIB App Builder rib-home,” in the *Oracle Retail Integration Bus Operations Guide*.

Because these database objects should have already been installed as part of the retail application's installation process, at this point just verify that the four hospital tables and the sequence exist in each application's database schema. Make sure that they have the correct columns to match this release of the RIB.

It is strongly recommended that all applications have a separate RIB Hospital and that they be logically and operationally associated with that application.

Note: See “RIB Software Life Cycle” in the *Oracle Retail Integration Bus Implementation Guide*.

Verify that Database XA Resources are Configured for RIB

RIB uses two phase commit transaction protocol (XA) to maintain consistency between the RIB Hospital database, application database and the JMS server. The Oracle database XA resources must be configured in order to participate in XA transaction. Check to see that the XA scripts have been run on the database to make it XA transaction aware. The initxa.sql script needs to be run before XA transactions will work. These are usually installed by default in 12c (12.x).

Verify that Correct RIB Functional Artifacts Database Objects Are Installed in PL/SQL Applications Database Schema

This section applies to PL/SQL application only, RMS, ORFM, and RWMS.

There are two ways through which PL/SQL applications exchange payload data with RIB:

- Oracle Objects payloads
- CLOB xml parsing and building library

RMS and ORFM use both mechanisms, whereas RWMS uses only Oracle Objects to communicate with RIB.

1. Verify that the RMS, ORFM, and RWMS database schema have the RIB delivered Oracle Objects installed. Oracle Objects are not installed as part of RIB installation. They are installed as part of the retail application database schema installation.
2. Verify that the PL/SQL retail application database schema already has the database objects defined equivalent to the ones defined in the RIB delivered script called `InstallAndCompileAllRibOracleObjects.sql`.

Note: See the *Oracle Retail Integration Bus Operations Guide*. `InstallAndCompileAllRibOracleObjects.sql` script is packaged as a part of `rib-public-payload-database-xml-library.zip` and is available under `<RIB-HOME>/application-assembly-home/rib-func-artifacts/`.

3. Verify that RMS (not RWMS) database schema has the RIB CLOB XML parsing and building library code installed. These CLOB XML libraries are not installed as part of RIB installation. They are installed as part of the retail application database schema installation.
4. Verify that the RMS retail application database schema has all the database objects defined equivalent to the ones defined in the RIB delivered script called `1_CLOB_CREATE_OBJECTS.SQL`.

Note: See the *Oracle Retail Integration Bus Operations Guide*. `1_CLOB_CREATE_OBJECTS.SQL` script is packaged as a part of `rib-public-payload-database-xml-library.zip` and is available under `<RIB-HOME>/application-assembly-home/rib-func-artifacts/`.

5. Update the RIB functional artifact URL in the RMS table `RIB_OPTIONS` to point to the location where `rib-func-artifact.war` will be deployed.

`XML_SCHEMA_BASE_URL=`
`http://<hostname>:<port>/rib-func-artifact/payload/xsd`

Where:

- `hostname` is the host name where `rib-func-artifact.war` will be deployed.
- `port` is the http port of the WebLogic server where `rib-func-artifact.war` will be deployed.

Create RIB TAFR RIB Hospital

For RIB, there is a separate RIB Hospital for the `rib-tafr` application.

1. Create a database user for the `rib` application `rib-tafr`.
2. Make sure that the TAFR Hospital user has the proper database permission.

Example TAFR User Create SQL:

```
CREATE USER <tafr hosp user>
IDENTIFIED BY <tafr hosp password>
DEFAULT TABLESPACE "USERS" TEMPORARY TABLESPACE "TEMP";
GRANT "CONNECT" TO <tafr hosp user>;
GRANT "RESOURCE" TO <tafr hosp user>;
ALTER USER <tafr hosp user>
QUOTA UNLIMITED ON USERS;
```

The rib-tafr application's database user must have the RIB Hospital tables. To create the RIB Hospital tables, run the 1_KERNEL_CREATE_OBJECTS.SQL script.

Note: The 1_KERNEL_CREATE_OBJECTS.SQL script is available in the rib-private-kernel-database-library-<version>.jar file. The rib-private-kernel-database-library-<version>.jar can be found in the rib-home/integration-lib/ directory structure. Extract the script and provide it to the Database Administrator (DBA) to create the required database objects.

Prepare Oracle AQ JMS Provider

Oracle Streams AQ is the JMS provider that RIB uses for asynchronous communication. It requires Oracle Database Enterprise Edition.

It is strongly recommended that the Oracle Database instance configured as the JMS provider is not shared with any other applications and not be on the same host (physical or logical) with any other applications. The steps included here are those needed to prepare for the installation, there are many architectural issues and operational parameters that must be considered before the installation. These are covered in other RIB documents.

RIB and AQ JMS Database Processes

The RIB's use of the AQ JMS should be understood, and the Oracle Database instance that is configured as the AQ JMS must be configured to support the number of server side user processes needed for the RIB adapters that will be installed and configured in each deployment environment. The number of JMS AQ processes depends on the RIB configuration.

Note: See the section, "Pre-Implementation Considerations - JMS Server Considerations," in the *Oracle Retail Integration Bus Implementation Guide*.

Note: See the section, "Deployment Architectures," in the *Oracle Retail Integration Bus Implementation Guide*. See also the "JMS Provider Management" and "The RIB on AQ JMS" sections in the *Oracle Retail Integration Bus Operations Guide*.

Create the RIB AQ JMS user with the appropriate access and permissions to the Oracle Streams AQ packages. This user must have at least the following database permissions:

- CONNECT
- RESOURCE
- CREATE SESSION
- EXECUTE ON SYS.DBMS_AQ
- EXECUTE ON SYS.DBMS_AQADM
- EXECUTE ON SYS.DBMS_AQIN
- EXECUTE ON SYS.DBMS_AQJMS

Example SQL:

```
CREATE USER <rib aq user> IDENTIFIED BY <rib aq password>
DEFAULT TABLESPACE "RETAIL_DATA"
TEMPORARY TABLESPACE "TEMP";
GRANT "CONNECT" TO <rib aq user>;
GRANT "RESOURCE" TO <rib aq user>;
GRANT CREATE SESSION TO <rib aq user>;
GRANT EXECUTE ON "SYS"."DBMS_AQ" TO <rib aq user>;
GRANT EXECUTE ON "SYS"."DBMS_AQADM" TO <rib aq user>;
GRANT EXECUTE ON "SYS"."DBMS_AQIN" TO <rib aq user>;
GRANT EXECUTE ON "SYS"."DBMS_AQJMS" TO <rib aq user>;
GRANT "AQ_ADMINISTRATOR_ROLE" TO <rib aq user>;
ALTER USER <rib aq user>
QUOTA UNLIMITED ON RETAIL_DATA;
```

Note: See also:

Oracle® Database Administrator's Guide 12c Release 1 (12.1.0.2)

Oracle® Streams Advance Queuing User's Guide and Reference 12c Release 1 (12.1.0.2)

Run the RIB Application Installer

This chapter provides instructions for running the RIB Application Installer.

Note: If there is an existing WebLogic installation on the server, you must upgrade to WebLogic 12.2.1.2. All middleware components associated with WebLogic server should be upgraded to 12.2.1.2.

Back up the `weblogic.policy` file (`$WLS_HOME/wlserver/server/lib`) before upgrading your WebLogic server, because this file could be overwritten. Copy over the `weblogic.policy` backup file after the WebLogic upgrade is finished and the post patching installation steps are completed.

RIB Application Installer Tasks

The RIB application installer can be used to perform any of the tasks below. For a new installation, all tasks are recommended.

- Run the Preparation Phase to unpack files, prepare the workspace, and perform preinstallation verifications.
- Generate the `rib-deployment-env-info.xml` file, which configures the RIB installation.
- Run the Assembly Phase to build the EAR and WAR files for the `rib-<app>` applications.
- Configure the Advanced Queuing JMS topics for RIB.
- Run the Deployment Phase to deploy the EAR and WAR files to the application servers.
- Restart the WebLogic server.

For more information about the Preparation, Assembly and Deployment Phases, see the *Oracle Retail Integration Bus Operations Guide*.

How to Run the RIB Application Installer

To run the RIB application installer, do the following.

1. Undeploy all old rib-apps and completely remove them from the AdminServer upload directory as follows.
 - a. Shut down all the rib-* servers.
 - b. Delete all rib-* apps from the deployments menu in WebLogic.

Note: Be sure to remove ONLY the rib-* apps and no others. If other applications are removed, their deployments will break.

- c. Remove them from the upload directory if they exist:

```
cd [RIB_DOMAIN]/servers/AdminServer/upload
rm -rf rib-*
```

- d. Start the rib-servers up again before starting the installer.

2. Expand the RIB Kernel distribution as described in [Expand the RIB Kernel Distribution](#).

Note: For RIB installations using AIX, xerces libraries may encounter an issue at runtime, causing rib-<app> to go a 'Warning' state and be non-functional.

If the rib-home and deployed rib-<app> are both going to be on AIX, then no action is required. The RIB compiler will prepare the rib-<app> with the correct AIX-specific configurations.

If the rib-home is located on any non-AIX platform but the rib-<app> is going to be deployed to AIX, then execute the following instructions:

1. Locate the rib-app-compiler.sh file in rib-home

```
$RIB-HOME/application-assembly-home/bin/rib-app-compiler.sh
```

2. Edit the rib-app-compiler.sh script to include a system property **rib.runtime.os.name="AIX"** as shown below.

```
exec "$JAVA_HOME/bin/java" -Drib.runtime.os.name="AIX"
-Dsave.generated.files=false -cp
"../../../../../../../../deployment-home/conf:../../../../application-assembly-home/conf:../../../../integration-lib/xercesImpl-2.11.0.jar:../../../../integration-lib/*:../../../../rib-func-artifacts/rib-func-artifact${CURRENT_VERSION}.war" oracle.retail.rib.compiler.Main $*
```

If the rib-home is located on an AIX platform but the rib-<app> is going to be deployed to any non-AIX platform, then execute the following instructions:

1. 1. Locate the rib-app-compiler.sh file in rib-home

```
$RIB-HOME/application-assembly-home/bin/rib-app-compiler.sh
```

2. Edit the rib-app-compiler.sh script to include a system property **rib.runtime.os.name="[OS Name]"** where [OS Name] is HP, Solaris or OL, as shown below.

```
exec "$JAVA_HOME/bin/java" -Drib.runtime.os.name="[OS Name]"
-Dsave.generated.files=false -cp
"../../../../../../../../deployment-home/conf:../../../../application-assembly-home/conf:../../../../integration-lib/xercesImpl-2.11.0.jar:../../../../integration-lib/*:../../../../rib-func-artifacts/rib-func-artifact${CURRENT_VERSION}.war" oracle.retail.rib.compiler.Main $*
```

3. Download the RIB Functional Artifacts distribution (RibFuncArtifact16.0.21ForAll16.0.21Apps_eng_ga.tar), and copy it into the <RIB_HOME>/download-home/rib-func-artifacts directory. Do not untar the file.
4. Download the tar file distributions for each rib-<app> application (RibPak16.0.21For<app>16.0.21_eng_ga.tar) that you will install. Copy the files into the <RIB_HOME>/download-home/all-rib-apps directory. Do not untar the files.
5. Download the RIB Diagnostic and Monitoring Tools (RDMT) package (Rdmt16.0.21ForAll16.x.xApps_eng_ga.tar) and untar it into the <RIB_HOME>/tools-home directory. Several files will be placed under the rdmt directory when you untar the package. This allows the installer to run the <RIB_HOME>/tools-home/rdmt/configbuilder.sh script as part of the RIB installation.
6. For multiple JMS servers only: If your RIB installation includes more than one JMS server, you must complete the additional preinstallation steps in the section, [Preinstallation Steps for Multiple JMS Server Setup](#).
7. Set the JAVA_HOME environment variable. The JAVA_HOME must be set to a JDK 1.8.0+ 64 bit with latest security updates, within the 1.8 code line. 64 bit. For Linux and Solaris OS only.
8. Be sure there are no pre-existing instances of ANT in your path:


```
$ unset ANT_HOME
$ unset ANT_CONTRIB
$ unset CLASSPATH
```

 The following command should not find the ant executable:


```
$ which ant
```
9. If you are using an X server, such as Exceed, set the DISPLAY environment variable so that you can run the installer in GUI mode (recommended). If you are not using an X server, or the GUI is too slow over your network, unset DISPLAY for text mode.
10. Make sure that all WebLogic instances that you intend to deploy to are currently running.
11. Give execute permissions to rib-home:


```
For example, chmod -R 700 rib-home.
```
12. Change directories to the <RIB_HOME> directory.
13. Run the rib-installer.sh script. The RIB installer appears.

Note: See [Appendix A, "Appendix: RIB Application Installer Screens"](#) for details about every screen and input field in the installer.

14. Restart the rib-<app>-server. During the installation process a shared library is created that contains the JDBC Driver update. For PL/SQL applications, it is necessary to bounce the WebLogic managed server instance.
15. If the installer finds the configbuilder.sh script, it will attempt to run it. However, if the installer is unable to run the RDMT script or if the RDMT setup failed for some reason, manually run the RDMT at this time to verify the installation.

Check the Log Files to Ensure Installation was Successful

To check log files, do the following.

1. Check the log files in <RIB_HOME>/deployment-home/log to ensure that all RIB applications deployed successfully.
2. If errors are encountered, verify that the installer inputs were correct.
3. If all installer inputs were correct, it may be necessary to rerun the installer with the existing <RIB_HOME>/deployment-home/conf/rib-deployment-env-info.xml file. Running the installer multiple times usually resolves any extraneous errors.

Preinstallation Steps for Multiple JMS Server Setup

Note: Using multiple JMS servers allows for the isolation of flows for performance and operational QoS. For more information, see "JMS Provider Management" section in the *Oracle Retail Integration Bus Operations Guide*.

If your RIB installation will include multiple JMS servers, additional steps are required before you can run the installer.

Note: Do not follow these steps if you are using only one JMS server.

1. Determine the family that must be configured for multiple JMS.
2. Locate the rib-integration-flows.xml inside the rib-func-artifacts.war.
Examine the rib-integration-flows.xml to identify all the RIB applications participating in the integration flows that must be configured with multiple JMS.
3. Ensure that a new AQ JMS database server (not a schema) is set up. For information see "[Prepare Oracle AQ JMS Provider](#)" in this guide.
4. Ensure that any additional AQ JMS are not in the same database server. Each new AQ JMS requires a new database server.

Note: If this is a first-time installation (or if you are using the installer to rewrite the rib-deployment-env-info.xml) you do not need to complete Step 6.

5. Add JMS servers by updating rib-deployment-env-info.xml.
6. In the rib-home, modify the appropriate files for each of the rib-<apps> that participate in the integration flow. Point the adapters to the right JMS server. The following applies to this step:
 - rib-<app>-adapters.xml
 - rib-<app>-adapter-resources.properties

Note: For more information on this step, see the *Oracle Retail Integration Bus Operations Guide*.

7. Once Step 6 is finished, the installer tool does the following to complete preinstallation activities:

Note: This step is not required if this is a first time installation or when the installer is used for installation.

- Compiles all rib apps
(\$RIB_HOME/application-assembly-home/bin/rib-app-compiler.sh).
 - Runs prepare-jms for the newly-created JMS server
(\$RIB_HOME/deployment-home/bin/rib-app-deployer.sh
-prepare-jms<jms2>). This step configures additional JMS servers.
 - Deploys (\$RIB_HOME/deployment-home/bin/rib-app-deployer.sh
rib-<app>).
8. Restart the WebLogic managed servers.

Preinstallation Steps for Configuring rib-ext

Rib-Ext is a new component added for external apps/3rd party integration with RIB. The RIB-EXT app organizes all publishers and subscribers adapters required by an external system and makes it easy to integrate from thirdparty systems. The list of publisher and subscriber adapters are defined by the customer's implementation team.

Following are the steps required to enable customer's specific integration flows:

1. The install tarball(RibPak16.0.21ForExt16.0.21_eng_ga) includes a version of the configuration file with all adapters enable as well as a copy of the file based on the customer's configuration..
 - rib-ext-adapters.xml (undesired flows can be commented out)
 - rib-ext-adapters_gap.xml (flows have been pre-determined)
2. Copy rib-ext-adapters_gap.xml to rib-ext-adapters.xml.
3. Proceed with rib installation.

Run RDMT to Verify the Installation

The RIB Diagnostic and Monitoring Tools (RDMT) should be used at this time to verify the RIB installation. See "Diagnostic and Monitoring Tools" in the *Oracle Retail Integration Bus Operations Guide* for how to configure and use the RDMT tools.

Backups and Logs Created by the Installer

The RIB application installer creates the following backup and log files:

- Each time the installer is used to generate a new rib-deployment-env-info.xml, a backup of the existing file will be created in: <RIB_HOME>/deployment-home/conf/archive/rib-deployment-env-info.xml.<timestamp>
- Each time the installer is run, the output of the installer script will be written to a log file. The installer's log file will be located in: <RIB_HOME>/.retail-installer/rib/log/rib-install-app.<timestamp>.log.

- Each time the installer is run, the user inputs will be recorded in: <RIB_HOME/.retail-installer/rib/log/ant.install.properties.<timestamp>. This file should only be used during troubleshooting to verify the exact inputs that were given to the installer. Modifying the file is not recommended, as it is a record of the inputs at the time the installer was run.

Resolving Installation Errors

If an error is encountered while running the installer, the cause of the error must be corrected before making another attempt to run the installer. The installer's log file may contain helpful information for determining the cause of the error. After you have examined the log files, see "[Appendix: RIB Installer Common Errors](#)" for a list of commonly encountered errors.

When you are ready to attempt another installation, keep in mind that you may be able to avoid re-entering all your inputs if the previous installation process was far enough along to configure the `rib-deployment-env-info.xml`. If the installer has already generated the `rib-deployment-env-info.xml` file, or if you have manually edited the `rib-deployment-env-info.xml` file, then it is not necessary to re-enter all the inputs in the installer. Verify that the `rib-deployment-env-info.xml` contains the correct settings, and run the installer with the **Use existing `rib-deployment-env-info.xml`** option.

Post-Installation Tasks

This chapter describes the steps that must be completed after installation.

Secure Filesystem

After the RIB installation process is finished, run the following commands from inside rib-home directory.

1. `chmod -R go-rwx`

This command revokes read, write, and execute permissions from the group and other users. Only the current user will have read, write, and execute permissions.

2. `find . -name "*.sh" -exec chmod u+rwx {} \;`

This command grants to the current user read, write, and execute permission for all executable scripts.

3. The .profile for the OS user for rib-home should include `umask 077` set.

4. Go to the `$DOMAIN_HOME/servers/$SERVER_NAME` folder, which is the managed server home where RIB application is installed, and run this command:

```
chmod -R go-rwx .
```

This command revokes read, write, and execute permissions from the group and other users. Only the current user will have read, write, and execute permissions.

Oracle Application Tasks

Verify that correct URL's to the RIB Functional Artifacts are configured in the Java EE Applications.

- Functional Artifact URL
- JNDI URL

RDMT Installation

The RIB Diagnostic and Monitoring Tool (RDMT) kit is a collection of command line tools, written in Unix shell script along with supporting Java classes packaged in jar files. There are various tools to address these areas:

- Installation Verification (reports)
- Operations (scanning and monitoring)
- Production (scanning and quick triage)

- Test and Support (scanning and fine grain control)
- AQ JMS support and tools

Installation Steps

Complete the following steps.

1. The RDMT Java support classes require Java 8.0. Installation will perform a check and fail if the path is not correct. Before you begin the installation process, verify that your Java version is correct.
2. Determine the location for installation. The recommended location is to put it in rib-home/tools-home directory. There is an empty rdmt subdirectory already there. This is only a placeholder. However, RDMT can be installed under any user in any directory.
3. Download the tar file (Rdmt16.0.21ForAll16.x.xApps_eng_ga.tar) and extract it (tar xvf Rdmt16.0.21ForAll16.x.xApps_eng_ga.tar).
4. cd to the RDMT directory and execute the configbuilder.sh script supplied with the toolkit (configbuilder.sh).
5. Once executed, it checks if the RDMT has been extracted under rib-home/tools-home directory. If so, it fetches all the necessary configuration information from rib-deployment-env-info.xml present under rib-home/deployment-home/conf directory and it automatically completes the RDMT installation.

If RDMT was extracted under some other directory with rib-home present on the same server, it prompts for the rib-home path. Provide the same and it fetches all the necessary configuration information from rib-deployment-env-info.xml present under specified rib-home/deployment-home/conf directory and it automatically completes the RDMT installation.

If rdmt was extracted in a remote server, it prompts for RIB configuration values during setup. The installation script prompts for the configuration settings needed to run the tools in the toolkit.

6. The installation automatically configures for all the rib-<apps> depending upon the applications in scope as defined in rib-deployment-env-info.xml. In case of remote installation, select Yes to configure additional rib<-apps>. It is recommended that you configure all the rib-apps that have been installed in the RIB Installation.
7. Run the RibConfigReport. This report runs a series of tests to validate the RIB components installed.

Information to Gather for Installation in Remote Server

The following are the necessary directory parameters.

Parameters	Setting
RDMT Home Directory	Rib16021ForAll16xxApps/rib-home/tools-home/rdmt/
RDMTLOGS Directory	Rib16021ForAll16xxApps/rib-home/tools-home/rdmt/RDMTLOGS
Temp Files Directory	Rib16021ForAll16xxApps/rib-home/tools-home/rdmt/RDMTLOGS/tmp

Parameters	Setting
RIB App Builder rib-home Directory	/Rib16021ForAll16xxApps/rib-home

The following are parameters for the JMS provider.

Parameter	Setting
AQ JMS User ID	<rib aq user>
AQ JMS Password	<rib aq password>
JMS Connection URL	jdbc:oracle:thin:@host-name:port:sid

The following are WLS parameters for JMX functions:

Parameter	Setting
WLS/JMX Host	ribhost
WLS Admin Port	8001
WLS Protocol	http or https
WLS Instance Name	rib-rms-server
WLS Instance Port	8002
WLS Protocol	http or https
WLS App Name	rib-rms
WLS User Name	<weblogic user>
WLS Password	<weblogic password>

The following are parameters for each hospital (RMS, RWMS, SIM, and others).

Parameter	Setting
User Name	<rms user>
Password	<rms password>
Database URL	jdbc:oracle:thin:@host-name:port:sid

RIB Hospital Administration Tool

This swing based RIB Hospital Administration tool is replaced by a Web application. See Oracle Retail Integration Bus Hospital Administration documentation for end user instructions and details about .ear file deployment in WebLogic Application Server 12.2.1.

Retail Integration Console Installation Tasks

Retail Integration Console (RIC) is a visualization tool for Retail Integration. It provides full visibility to the Oracle Retail Integration System in a unified view within the business context of the Oracle Retail applications.

Prerequisites

- RIB must be deployed.
- JMS-Console must be deployed from `rib-home/tools-home/`.
- `rib-home` must be accessible to `ric-home`, in other words both must share the file system.

Deployment Steps

Perform the following procedure to deploy RIC:

1. Download `RicKernel16.0.21ForAll16.x.xApps_eng_ga.zip` to a location (for example - `RIC-APP-BUILDER`) on your computer which has your `rib-home`.
2. Edit the configuration file `ric-deployment-env-info.json` inside `ric-home/conf/` folder.
3. Modify the `MiddlewareServerDef` and `IntegrationProduct` with information that is specific to your environment.
 - Set the value of `ribEnable` property in the configuration file to `true`.
 - Set the value of `ribHome` property in the configuration file to point to your `rib-home`.
 - Set the value of `RicAppServer` fields to point to the environment where you want to deploy RIC.
 - Set the value of `rsbEnable` property in the configuration file to `true`.
 - Set the value of `ddiEnable` property in the configuration file to `true`.
4. Go to the `ric-home/bin/` folder, run the compiler to update the RIC ear as follows:

```
$ sh ric-app-compiler.sh -setup-credentials
```

When prompted by the compiler, enter the user name and password for the Weblogic server and RIC admin user, the RIC admin user will be used to log in RIC.
5. Run the deployer script to deploy RIC and create the user and group on your weblogic server from the same folder as follows:

```
$ sh ric-app-deployer.sh -deploy-ric-app
```

Note: See the section, "Configuration and Deployment," in the *Oracle Retail Integration Console Guide* before attempting installation.

Integration Gateway Services Installation Tasks

The RIB Integration Gateway Services (IGS) component is an optional sub system and should be installed only after the core RIB components have been installed and verified.

The IGS provides an integration infrastructure for external (third party) system connectivity to the Oracle Retail Integration Bus (RIB) in the form of a tested set of Web service providers and the configurations to connect to RIB. So it should be installed only if there is a requirement to do so.

Prerequisites

The RIB Integration Gateway Service (IGS) component requires Oracle WebLogic Server 12.2.1 and Java 8.

Before installation, read the *RIB Implementation Guide* for the considerations and planning steps needed for the RIB IGS deployment to WebLogic Server. Also make sure \$JAVA_HOME is pointing to Java 8.

Prepare Oracle WebLogic Server

The installation and base configuration of the Oracle WebLogic Server is beyond the scope of this document. Work with the Oracle WebLogic Server administration team to determine the physical and logical placement of the RIB IGS component within the WebLogic Server deployment.

Create the RIB IGS WebLogic Managed Server

This section describes the process of preparing the Oracle WebLogic Server to install the igs-service.

1. IGS ear file should be deployed to a separate managed server.
2. When naming the WebLogic instance, it is recommended (but not required) that the .ear file name is used (without the extension), along with underscore, _server.


For example, if the .ear file name is igs-service.ear, the instance name would be igs-service_server.

3. Add the server start argument for IGS managed server. This can be done from the WLS console, or in the startWebLogic.sh and startManagedWebLogic.sh scripts.

- a. To edit the scripts, add the following to startWeblogic.sh and startManagedWebLogic.sh under \$DOMAIN_HOME/bin:

```
JAVA_
OPTIONS="-Doracle.retail.soa.enabler.service.provider.engine.ServiceProvide
rImplLookupFactory.interceptor=com.oracle.retail.igs.integration.service.Dy
namicServiceProviderImpl ${JAVA_OPTIONS}"
```

- b. To edit the server start arguments in the WebLogic console, click igs-server -> Server start as below:

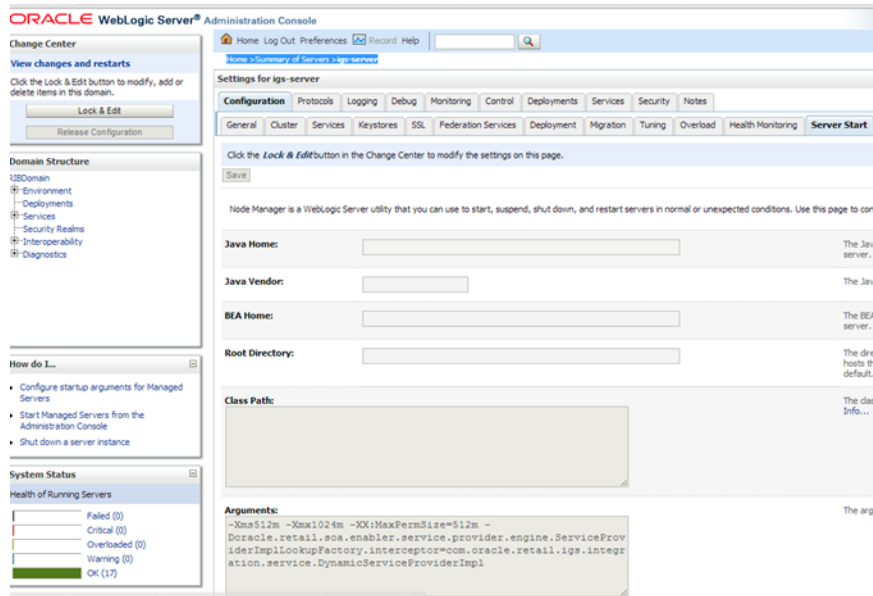

4. Bounce the Admin and managed server before you deploy the IGS.

Prepare Integration Gateway Services (IGS)

The IGS can be installed under \$RIB_HOME (rib-home/tools-home/integration-bus-gateway-services) as described below.

Running IGS under \$RIB_HOME

To run IGS under \$RIB_HOME, complete the following steps:

1. Download the IntegrationGatewayService16.0.21ForAll16.0.21Apps_eng_ga.tar and untar it under rib-home/tools-home.


```
cd rib-home/tools-home/
IntegrationGatewayService16.0.21ForAll16.0.21Apps_eng_ga.tar
```
2. Go to rib-home/tools-home/integration-bus-gateway-services/conf and edit the IgsConfig.properties as follows:
 - Change the value of WlsUrl to point to the WebLogic server where IGS is going to be deployed. The port in the WlsUrl should be the administration port.
 - Change the value of WlsTarget to the instance name where IGS is going to be deployed (for example, igs-service_wls_instance).
3. Go to \$IGS_HOME integration-bus-gateway-services/bin. Run the igs-install.sh. Running this script does the following:

- Verifies whether the attempted IGS installation is from within rib-home or in standalone mode; preconfiguration cleanup is based on this mode.
- Asks the user for the WebLogic user name and password and saves it in a secure credential store.

Note: The WebLogic user name used here should be set up with the administrator role.

- Prepares the igs-service.ear, based on the number of channels and the number of configured AQ JMS servers.
 - Configures the WebLogic server with the AQ JMS server information listed in the rib-deployment-env-info.xml.
 - Deploys the igs-service-ear to the WebLogic server.
4. Restart the WebLogic managed server.

All of the items in Step 4 also can be performed separately, as follows:

1. Go to rib-home/tools-home/integration-bus-gateway-services/bin. Run the igs-admin.sh -setup-igs to set up the environment. Running this script verifies whether the attempted IGS installation is from within the rib-home or in standalone mode; the preconfiguration cleanup is based on this mode.

```
sh igs-admin.sh -setup-igs
```

2. Go to rib-home/tools-home/integration-bus-gateway-services/bin. Run the igs-admin.sh -setup-security-credential to set up the WebLogic user name and password information in a secure credential store.

```
sh igs-admin.sh -setup-security-credential
```

3. Go to \$IGS_HOME /integration-bus-gateway-services/bin. Run the igs-admin.sh -prepare to prepare the igs-service.ear, based on the number of channels and configured AQ JMS.

```
sh igs-admin.sh -prepare
```

4. Go to rib-home/tools-home/integration-bus-gateway-services/bin. Run the igs-admin.sh -configure to configure the WebLogic server with the AQ JMS server information listed in the rib-deployment-env-info.xml.

```
sh igs-admin.sh -configure
```

5. Go to rib-home/tools-home/integration-bus-gateway-services/bin. Run the igs-admin.sh -deploy to deploy the igs-service.ear to the WebLogic server.

```
sh igs-admin.sh -deploy
```

6. Restart the WebLogic managed server.

7. If the igs-service.ear must be undeployed, run therib-home/tools-home/integration-bus-gateway-services/bin/igs-admin.sh -undeploy to undeploy an igs-service.ear.

```
sh igs-admin.sh -undeploy
```

Note: The log files are located here: **\$IGS_HOME/integration-bus-gateway-services/log**

If any changes are made to the rib-deployment-env-info.xml or the rib-<app>-adapters.xml, the -prepare, -configure, and -deploy steps, must be executed.

Verify the IGS Application Installation Using the Administration Console

To verify the IGS installations using the Oracle WebLogic Administration Console, complete the following steps:

Note: The Test Client link is visible when the server is in Development mode.

1. Navigate to the Deployments page.
2. On the Summary of Deployments page, locate the igs-service.
3. To expand the tree, click the + beside the ig-service.
4. Locate the Web Services section.
5. Click any Web service (for example, ASNInPublishingService) to move to settings for ASNInPublishingService page.
6. Select the Testing tab.
7. To expand the tree, click the + beside the service name.
8. Locate the Test Client link. Move to the WebLogic Test Client page.
9. Select the Ping operation. Enter test data in the string arg0: text box. Click **Ping**.
10. The test page will include the request message and the response message.

Secure IGS Web Services Using the Administration Console

IGS Web services can be secured in two ways. One approach is simple user name and password authentication. For the other approach, passwords are encrypted with certificates.

The following describes both approaches for server-side and client-side setup.

Note: The various policy files that can be used to secure Web services are listed in the ws-policy tab of the Web service in the WebLogic Server Administration Console.


Server-side Setup for User Name and Password Authentication

This section describes the two-step process required for securing Web services on the server side. These steps are performed using the Oracle WebLogic Server Administration Console.


Attach Policy File to the Web Service

The usernametoken.xml contains the policy used by the Web service and is found in the META_INF/policies folder in the .ear file. Complete the following steps to attach the policy file to a Web service.


1. In the Summary of Deployments screen, click the application. In the illustration below, the application is igs-service.

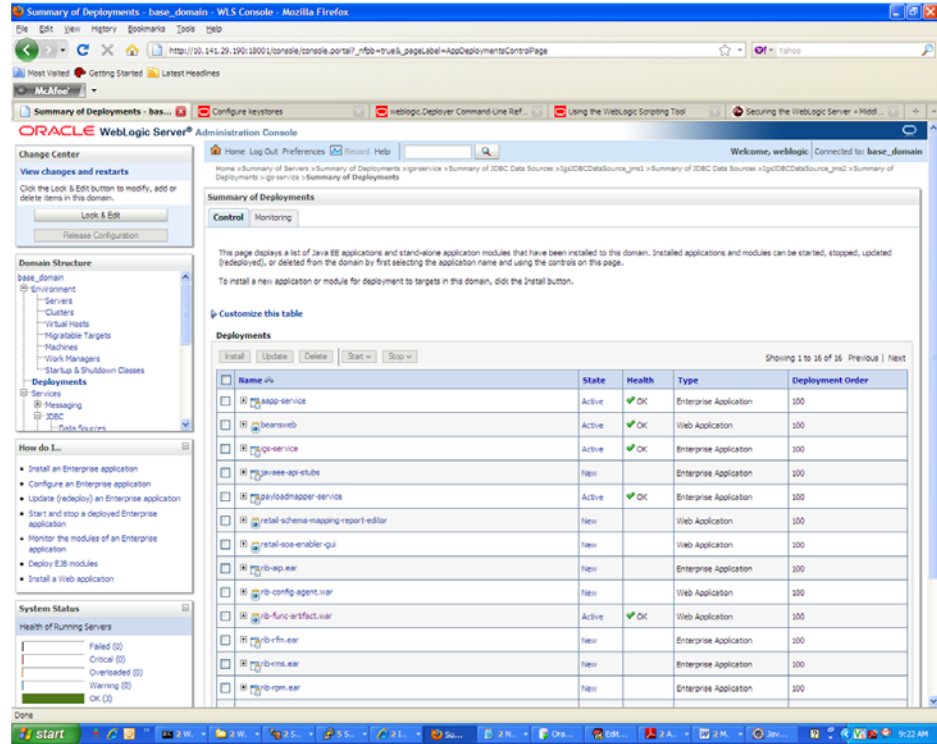


- An overview page is displayed, including a list of modules and components installed as part of the application.

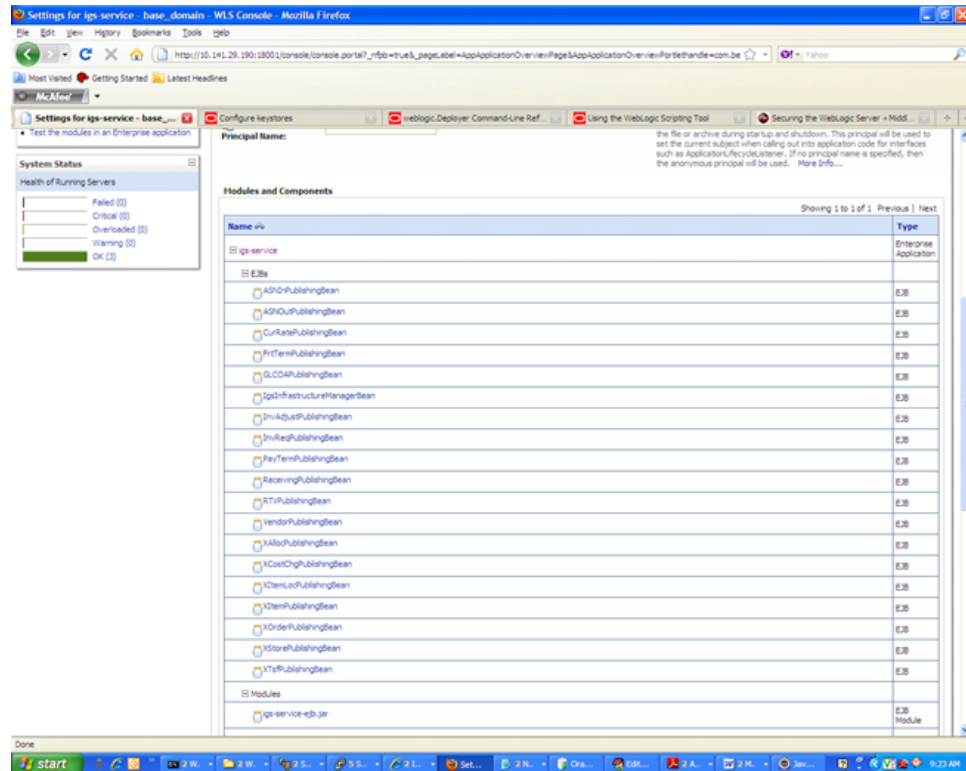


- In the Web service list, click the service for which you want to enable security. The following screen is displayed to provide an overview of the Web service.

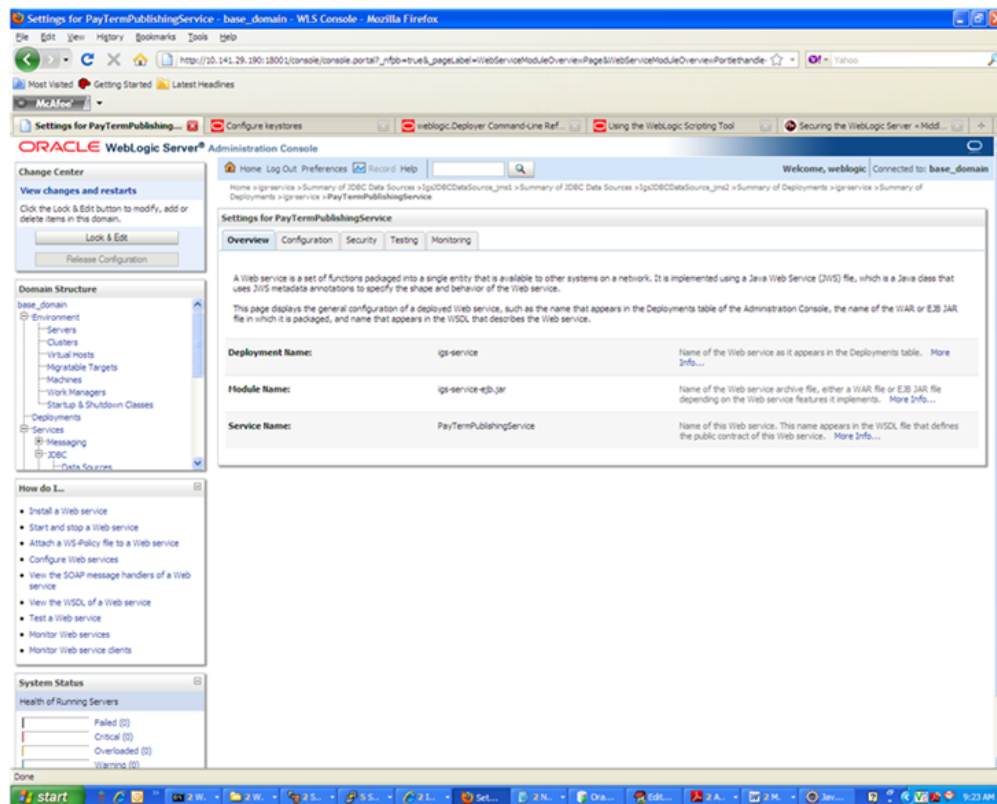


- On this overview screen, click the Configuration tab. Click the WS-Policy tab. The Web service port is shown under Service Endpoints and Operations.

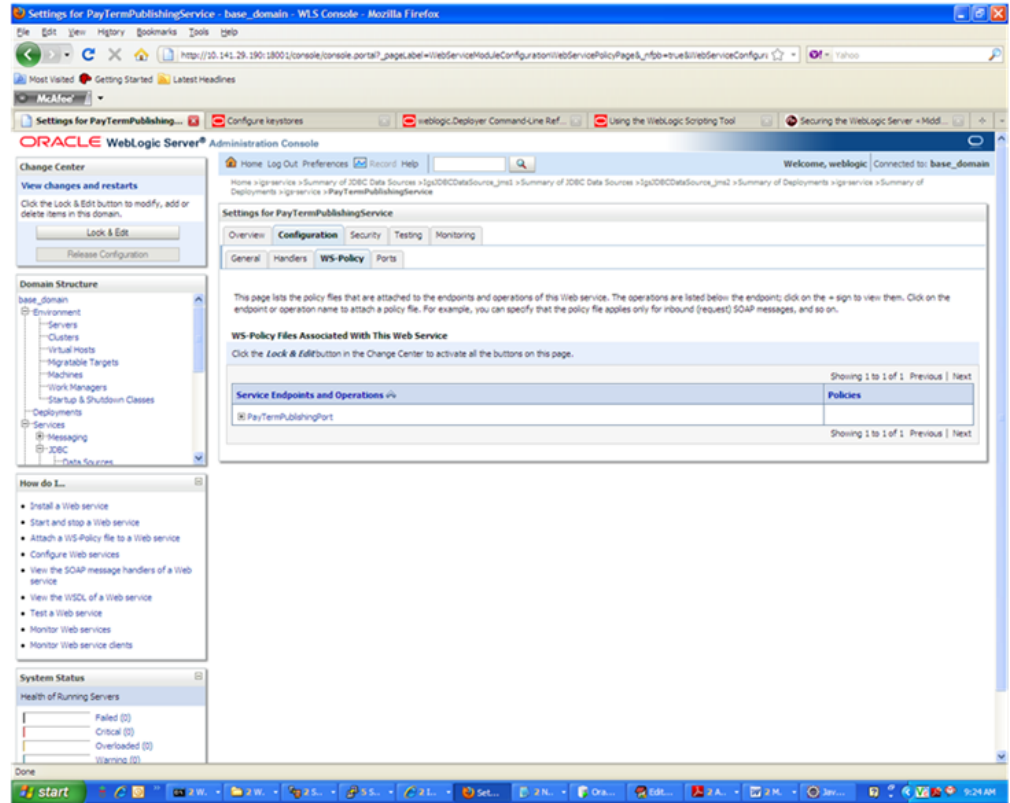


5. Click the plus sign next to the port name. The Web service operations are displayed.

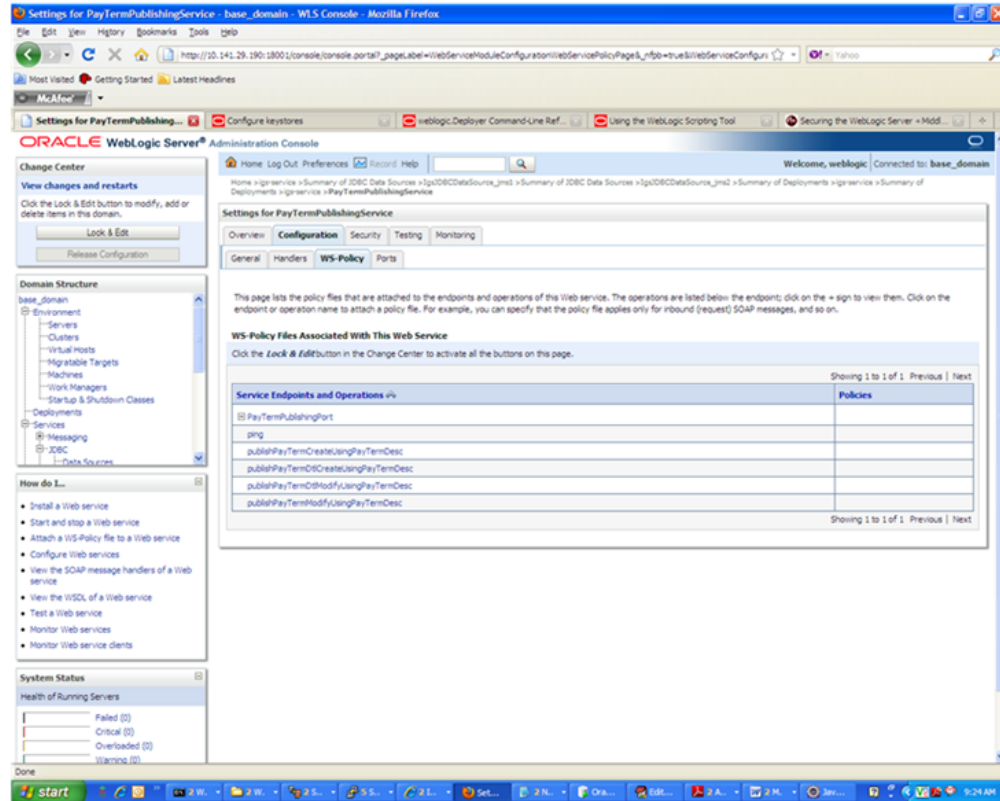


6. You can secure all the Web service operations at once or select only the operations you want to secure. Click the name of the port. On the Configure a Web Service policy screen, you can attach the policy file to the Web service. Select WebLogic and click the Next button.

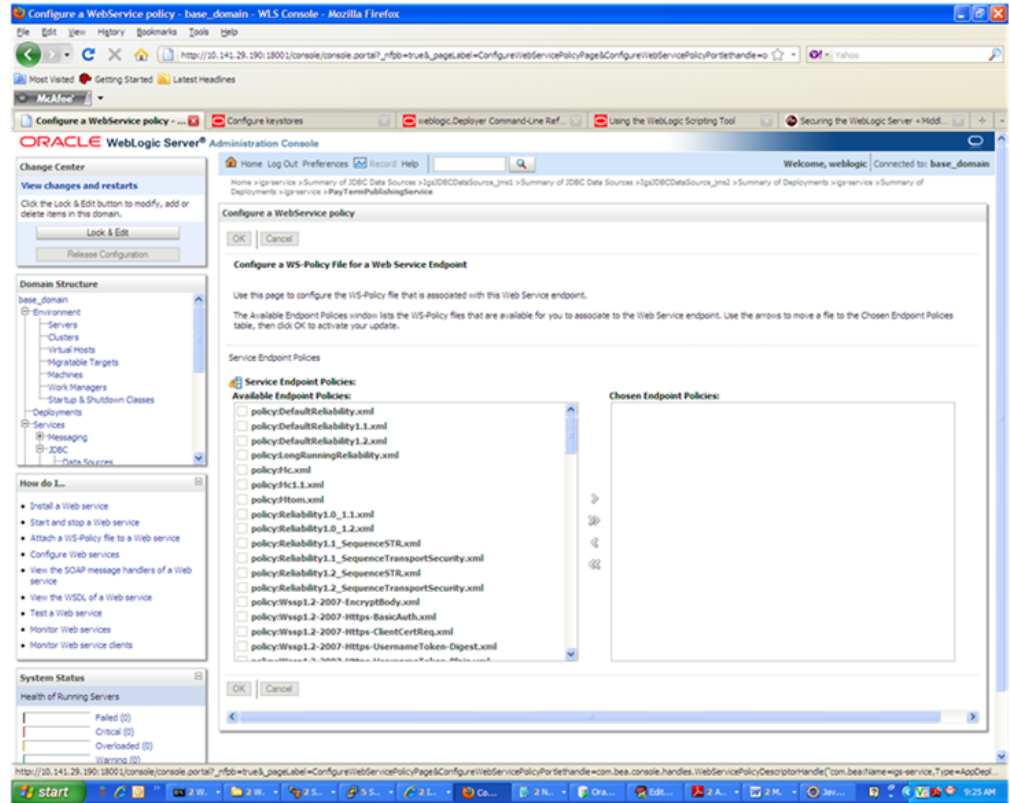


7. From the Available Endpoint Policies list, select policy:usernameToken.xml. Click the right arrow to move it to the drop down list below Chosen Endpoint Policies. Click OK. The Save Deployment Plan Assistant screen is displayed.

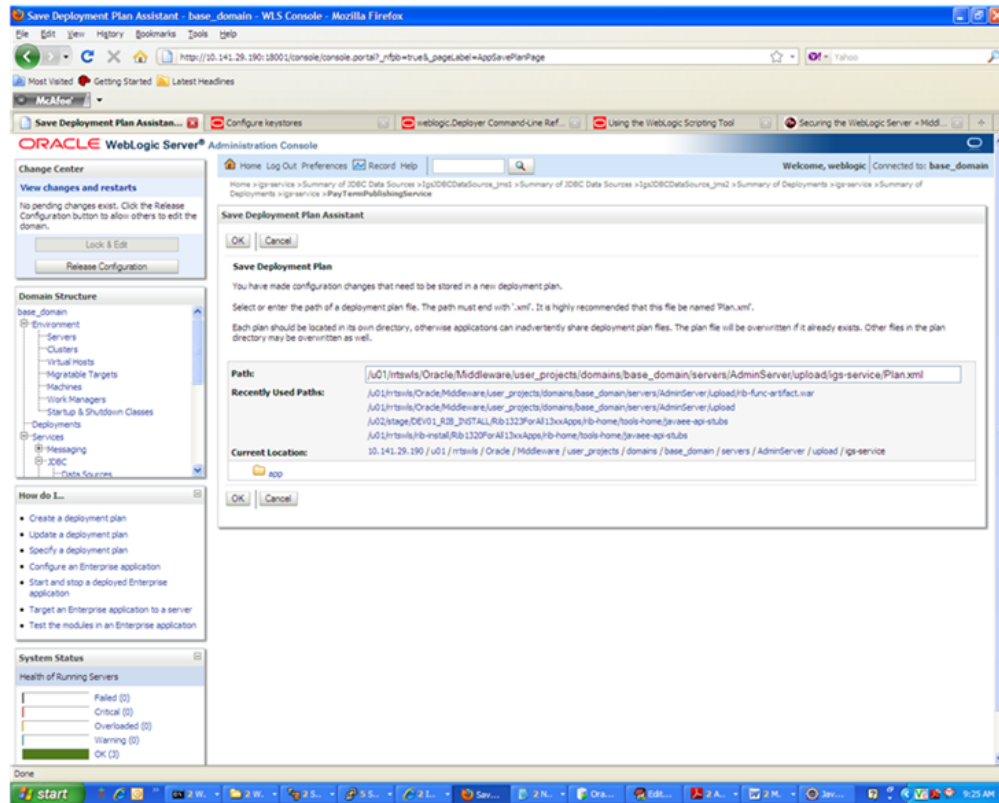

8. At the bottom of the Save Deployment Plan Assistant screen, click **OK**. The following screen is displayed, including status messages near the top.

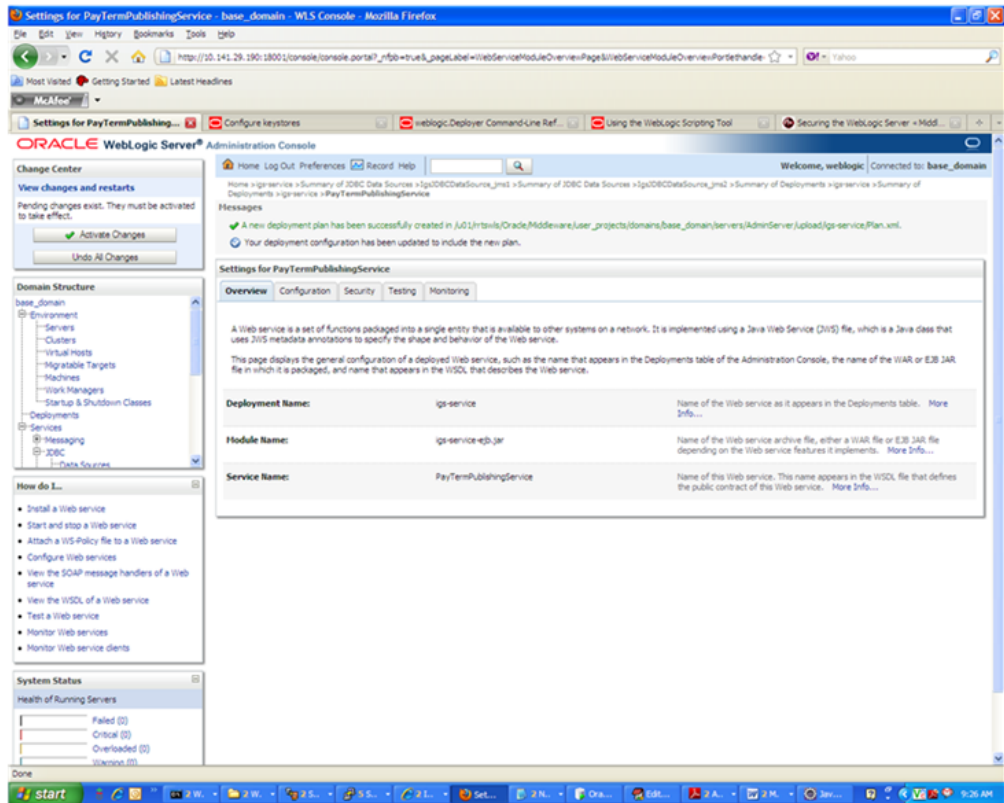

9. Click **Activate Changes**. The following screen is displayed.

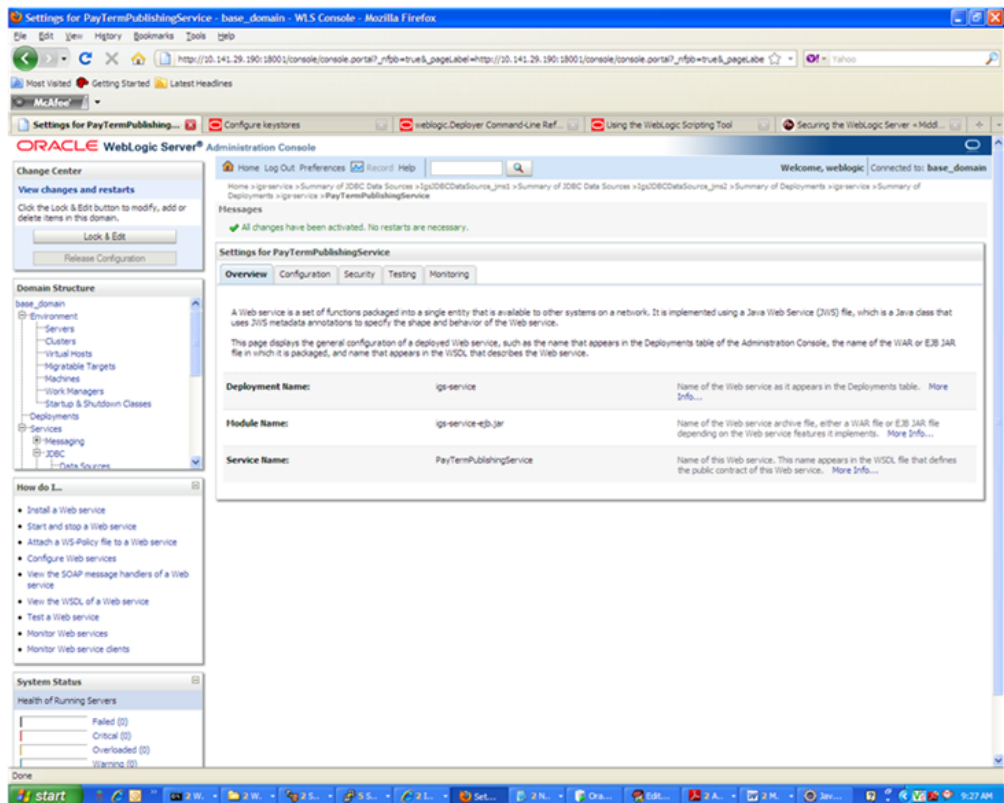

- Under the Testing tab, on the Web Service page, click the WSDL to view the details of the policy just added to the Web service. The WSDL contains information similar to the following.

```
<?xml version='1.0' encoding='UTF-8'?>
  <definitions
    xmlns:tns="http://www.oracle.com/retail/igs/integration/services/PayTermPublishingService/v1"
    xmlns:ns1="http://www.oracle.com/retail/integration/bus/gateway/services/BusinessObjectId/v1"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"
    xmlns:xsd="http://www.w3.org/2001/XMLSchema"
    xmlns:ns2="http://www.oracle.com/retail/integration/services/exception/v1"
    xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
    xmlns="http://schemas.xmlsoap.org/wsdl/" name="PayTermPublishingService"
    targetNamespace="http://www.oracle.com/retail/igs/integration/services/PayTermPublishingService/v1"
    xmlns:wsp="http://schemas.xmlsoap.org/ws/2004/09/policy"
    xmlns:wssutil="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd">
    <wsp:UsingPolicy wssutil:Required="true" />
    <wsp:Policy wssutil:Id="usertoken">
    <ns0:SupportingTokens
      xmlns:ns0="http://docs.oasis-open.org/ws-sx/ws-securitypolicy/200512">
    <wsp:Policy>
    <ns0:UsernameToken
      ns0:IncludeToken="http://docs.oasis-open.org/ws-sx/ws-securitypolicy/200512/IncludeToken/AlwaysToRecipient">
    <wsp:Policy>
    <ns0:WssUsernameToken10/>
    </wsp:Policy>
    </ns0:UsernameToken>
    </wsp:Policy>
    </ns0:SupportingTokens>
    </wsp:Policy>
```

Create Roles and Users

This section describes how to add roles and users who can access the Web services. The first step is to add users to the security realm, as described below.

- In the Domain Structure window of the Oracle WebLogic Services Administration Console, click the Security Realms link.




- The Summary of Security Realms screen is displayed, including the name of the default realm.

The screenshot shows the Oracle WebLogic Server Administration Console. The main content area displays the "Summary of Security Realms" page. The page includes a "Change Center" on the left, a "Domain Structure" tree, and a "How do I..." section. The "Summary of Security Realms" section contains a table of security realms.


Name	Default Realm
myrealm	true

The table shows one realm named "myrealm" with the "Default Realm" column set to "true". The page also includes "New" and "Delete" buttons for each row.


- Click the name of the default realm. The settings for the realm are displayed.

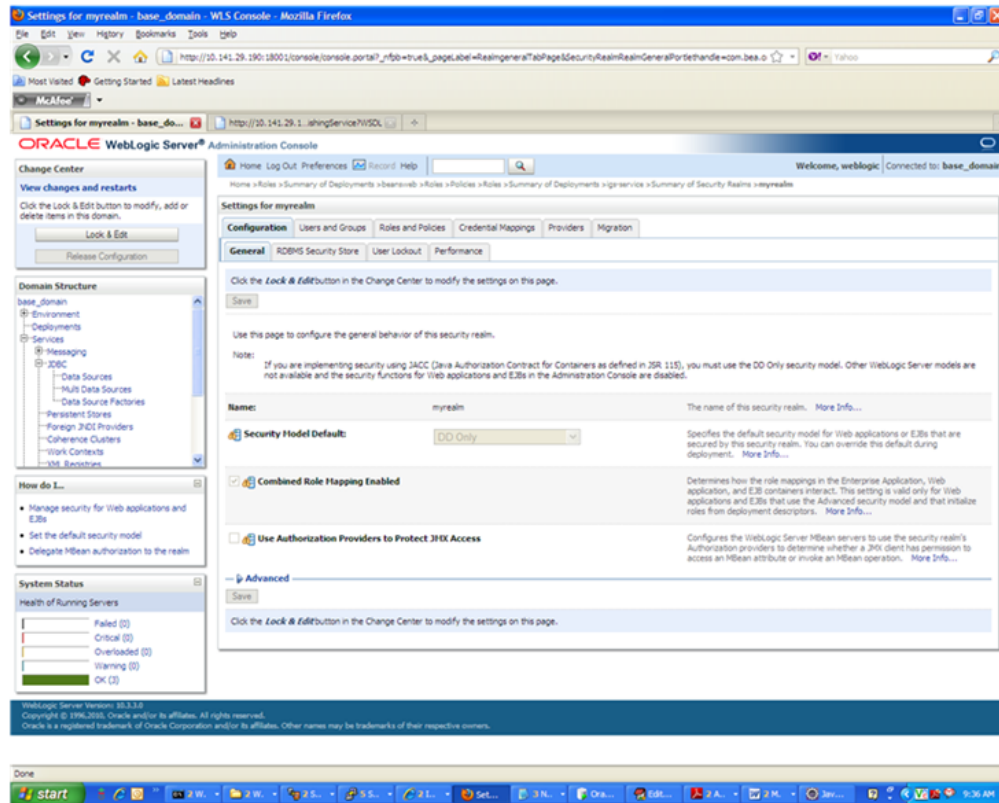


4. On the Settings screen, click the Users and Groups tab.

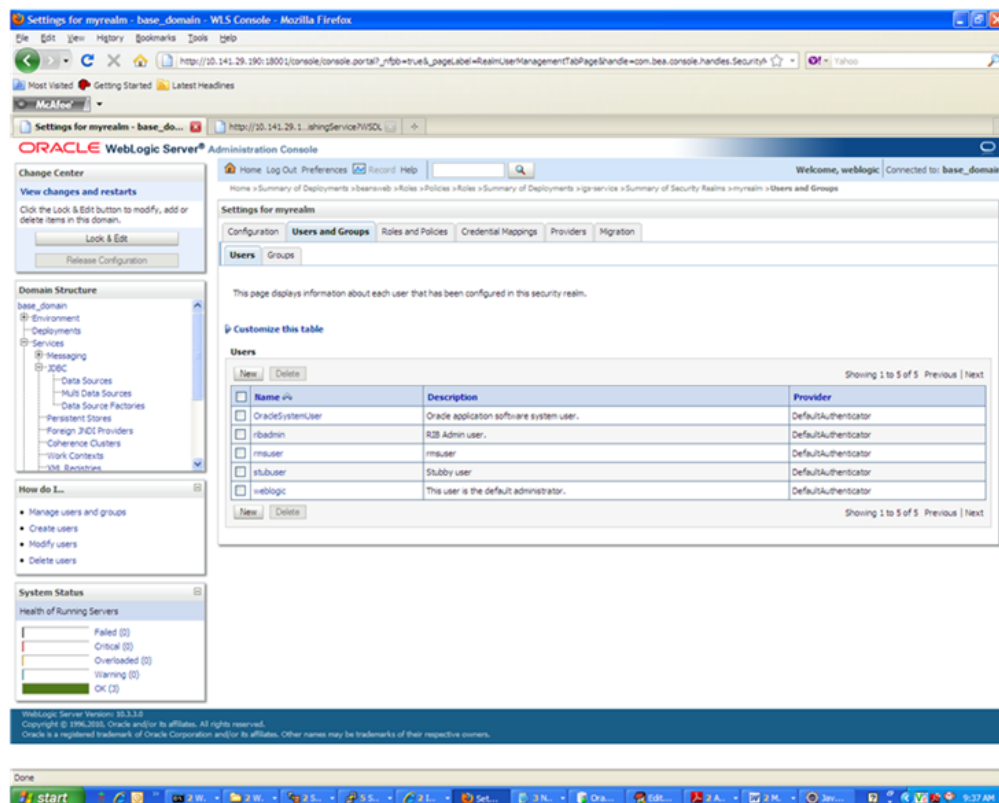

- In the Users and Groups tab, click the Users tab. At the bottom of the Users tab, click **New**. The Create a New User screen is displayed.

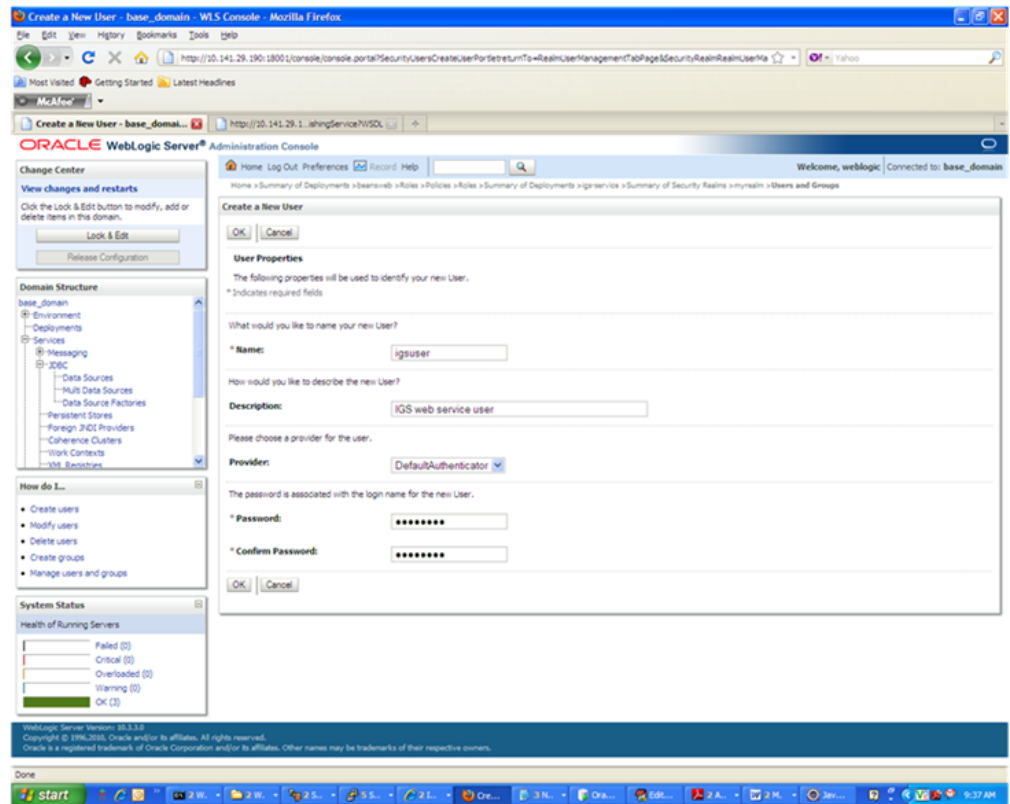


- In the Create a New User screen, enter a user name and password. Leave the default value for Provider. Click **OK** to save the information. The new user is added to the list of users.

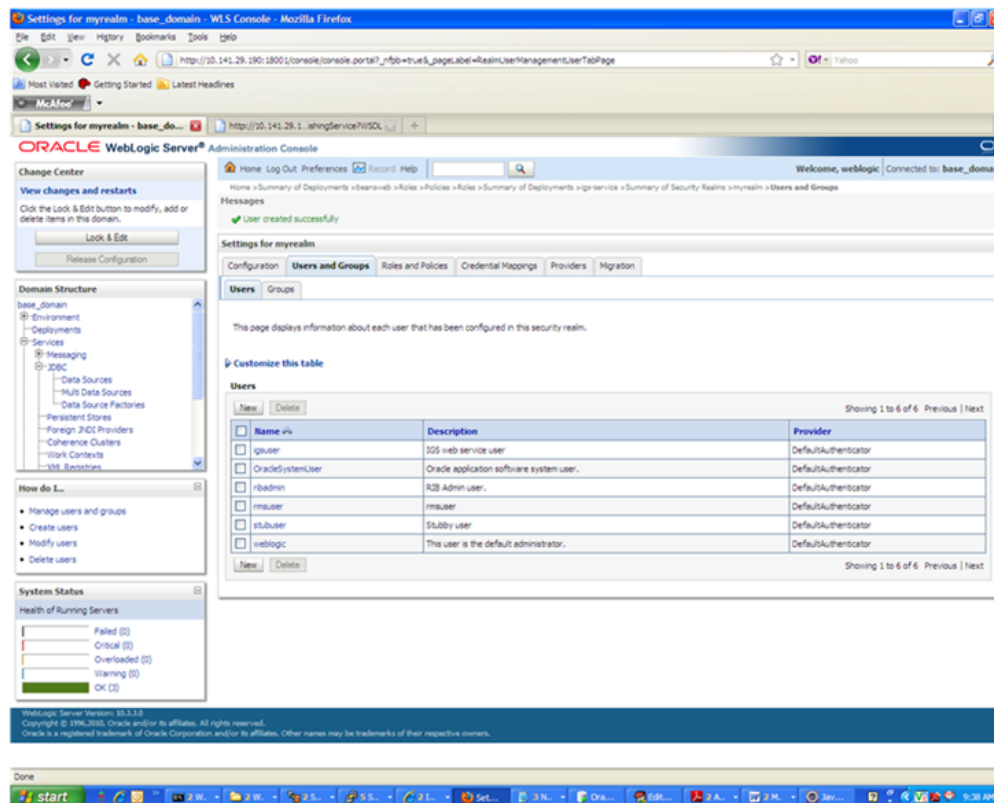


Note: You can add roles from the Roles and Policies tab of the security realm or through the Security tab of the Web service. The following instructions are for creating a role through the Security tab of the Web service.


7. Navigate to the Security tab of the Web service. Click the Roles tab.

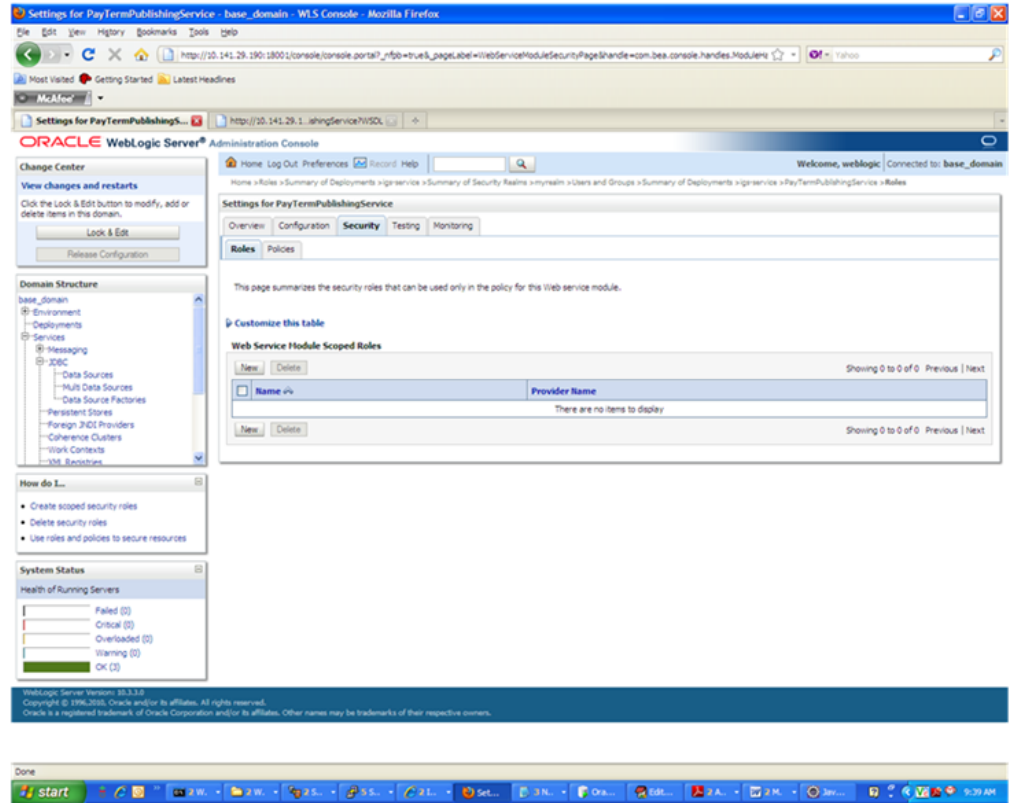


8. In the Roles tab, click **New**. The Create a Web Service Module role screen is displayed.

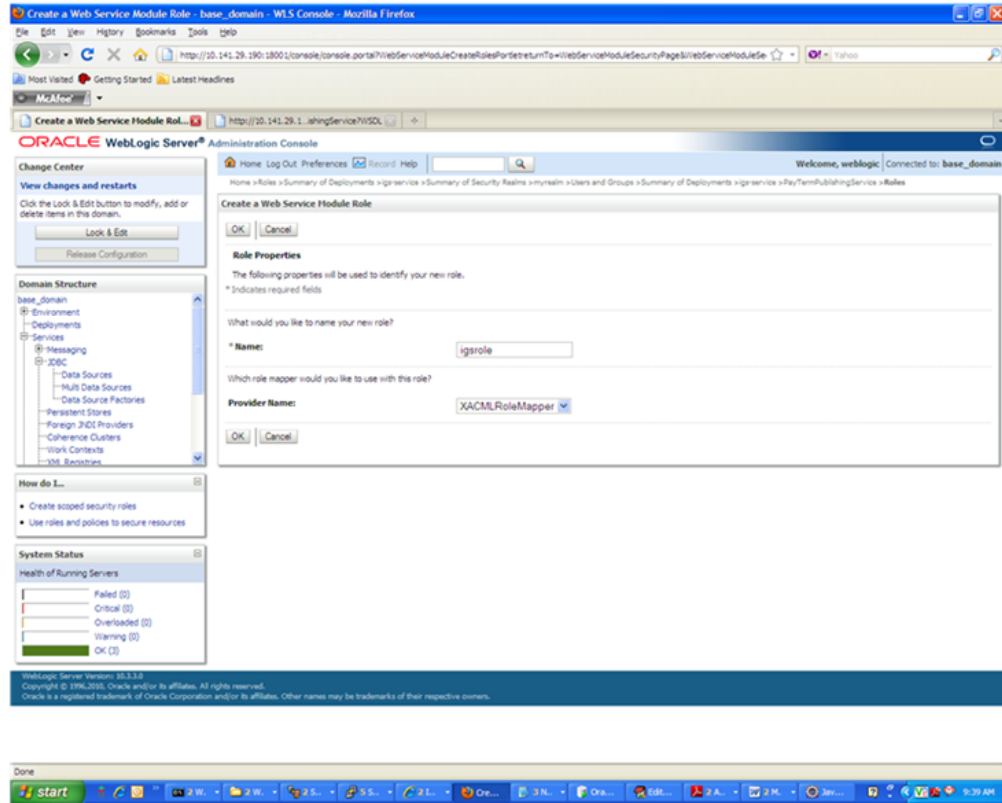


9. In the Create a Web Service Module Role screen, enter the role name in the Name field (for example, rmsrole). Leave the default value in the Provider Name field. Click OK. The new role is displayed in the Roles tab of the Web service.

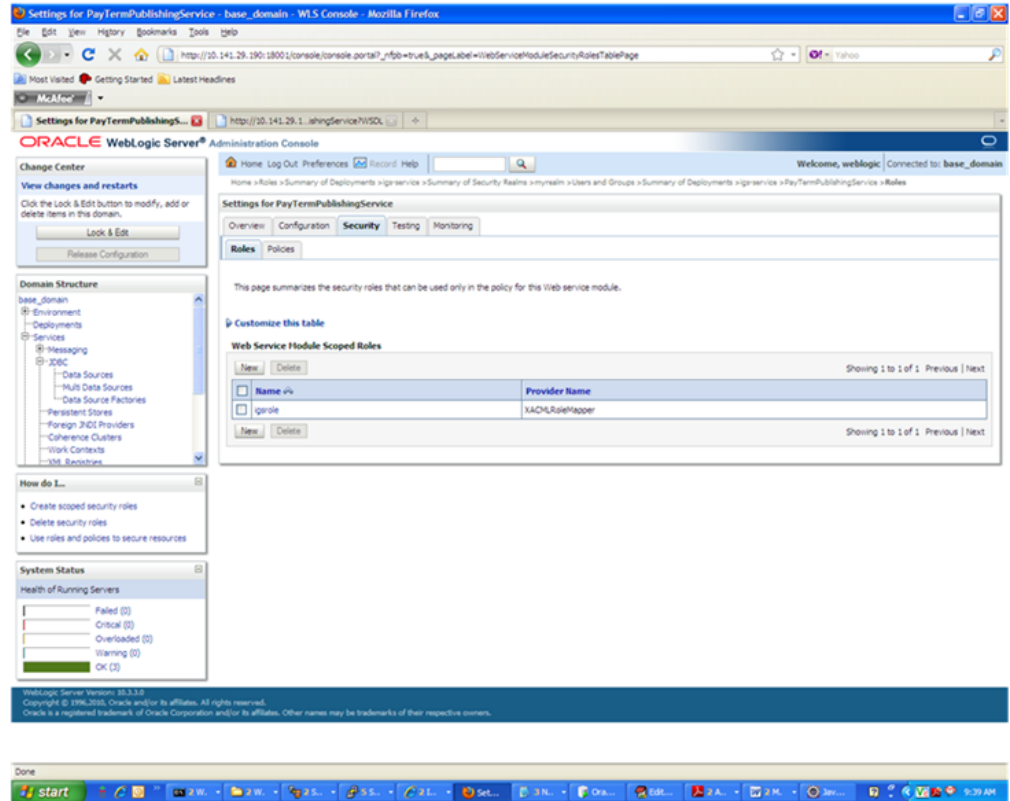


- To add the user to the role, click the name of the new role in the Roles tab. The Edit Web Service Module Scoped Roles screen is displayed.

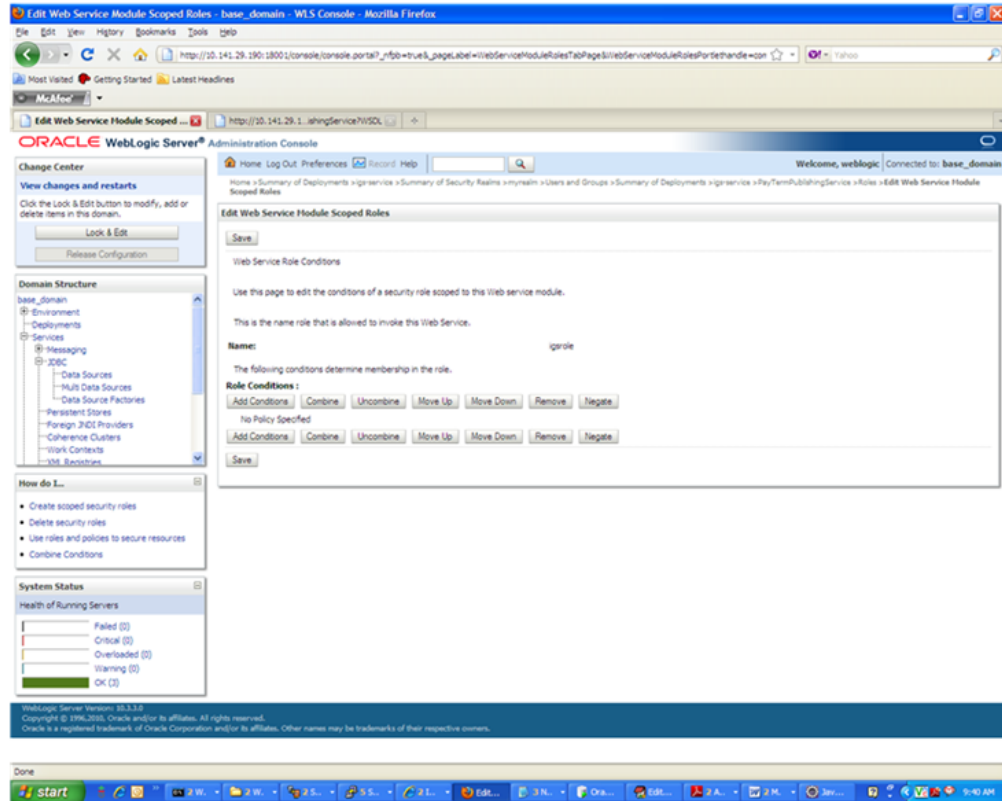


11. In the Edit Web Service Module Scoped Roles screen, click **Add Conditions**. The "Choose a Predicate" option is displayed.

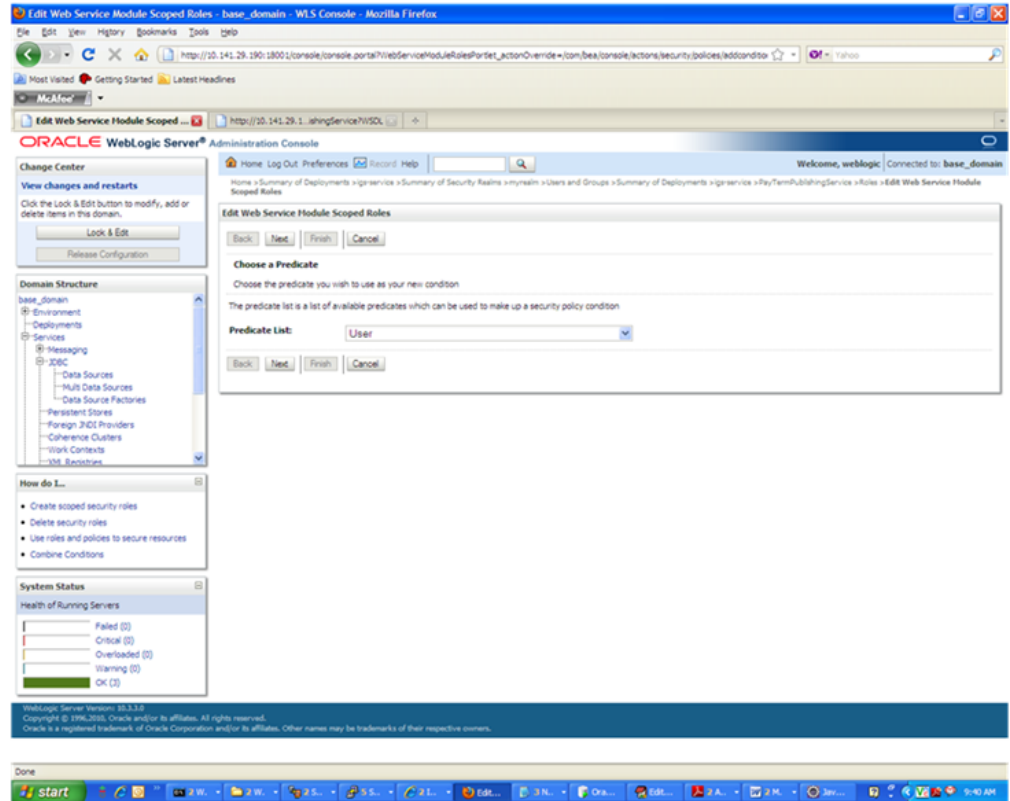


12. From the Predicate List, select User. Click Next. The Edit Arguments argument is displayed.

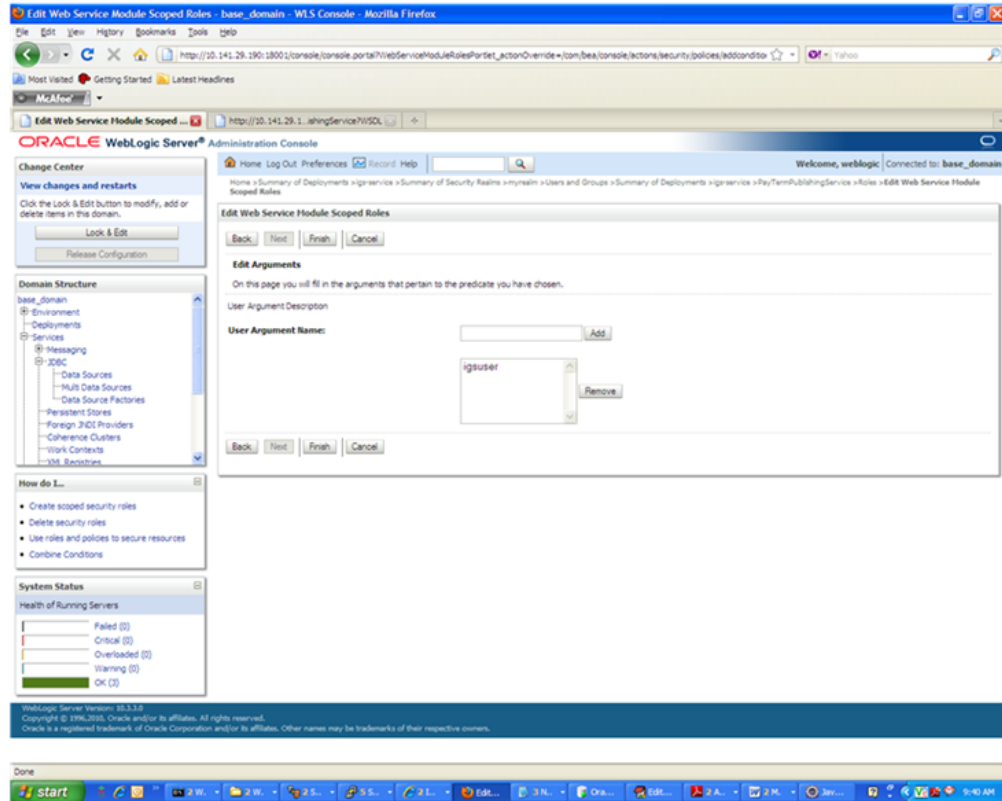


13. In the User Argument Name field, enter the user name created in the security realm. Click **Add**. The name will move down to the box below the Add button. Click **Finish**. The following screen is displayed.

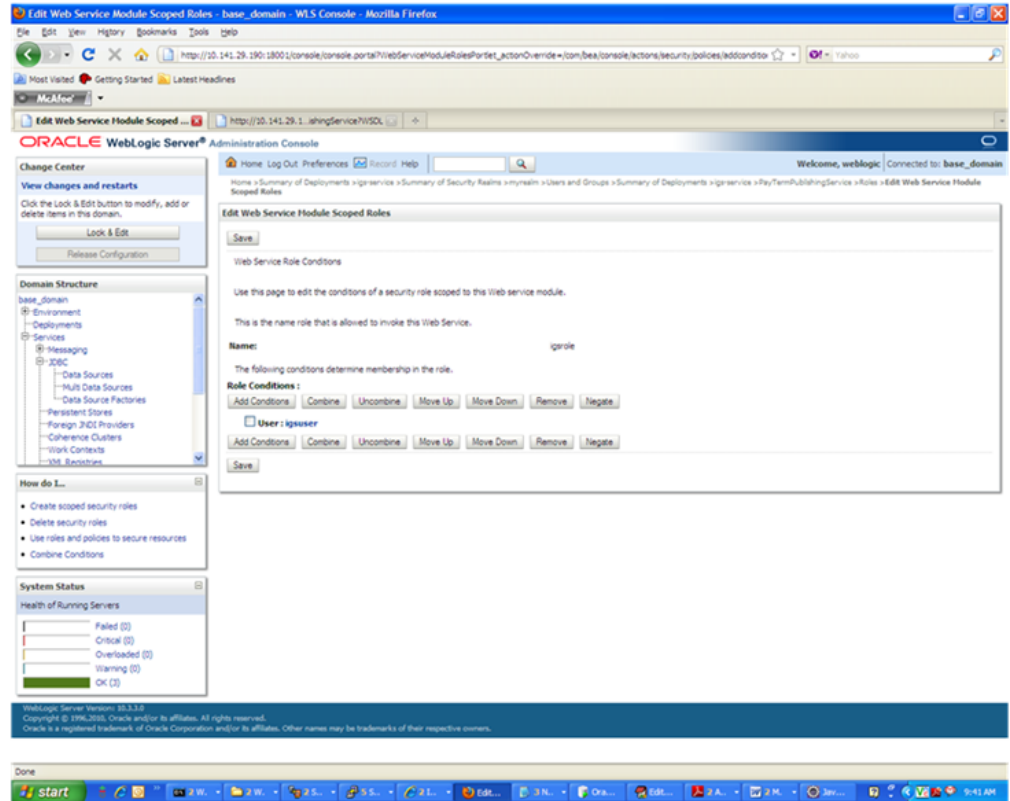


14. Click **Save**. The same screen is displayed with this message near the top: "Changes saved successfully."
15. Return the Security tab of the Web service and click the Policies tab.

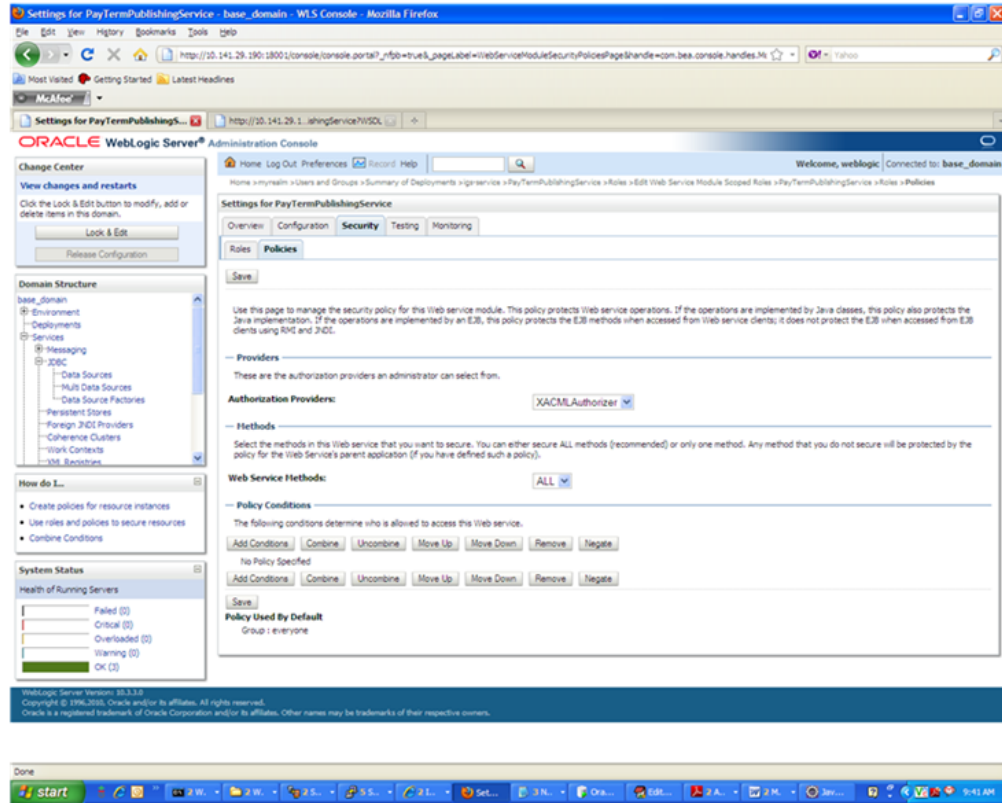


16. On the Policies tab, click **Add Conditions**. The "Choose a Predicate" option is displayed.

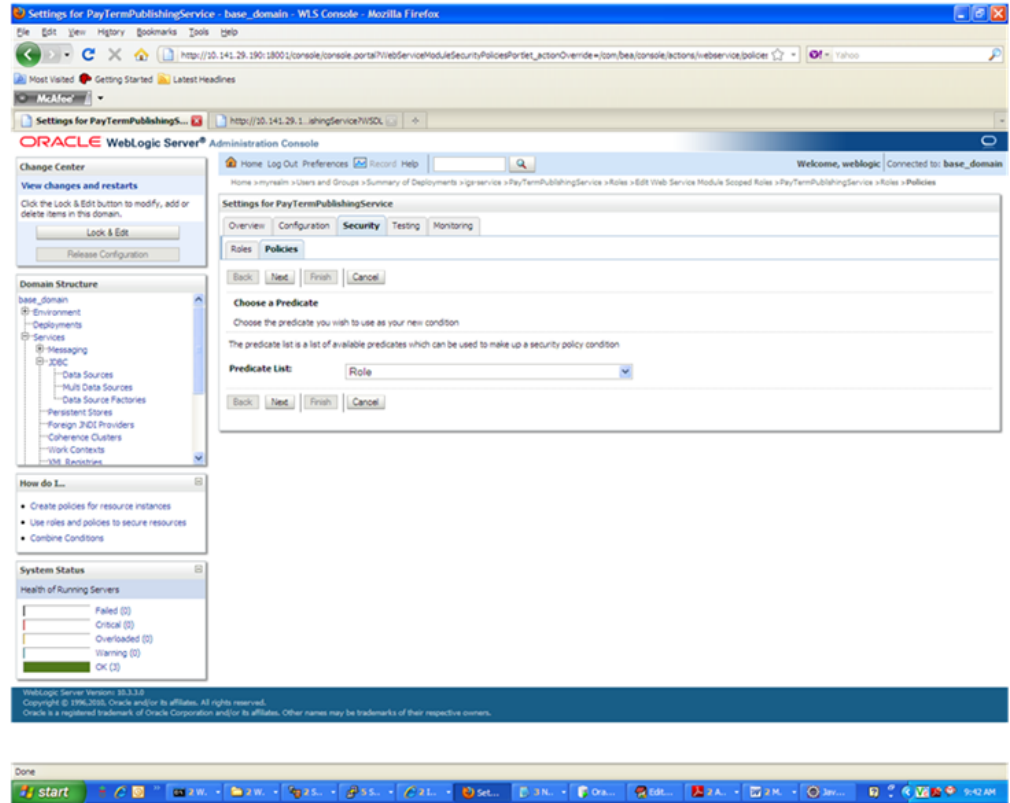

17. From the Predicate List, select Role. Click Next. The Edit Arguments option is displayed.

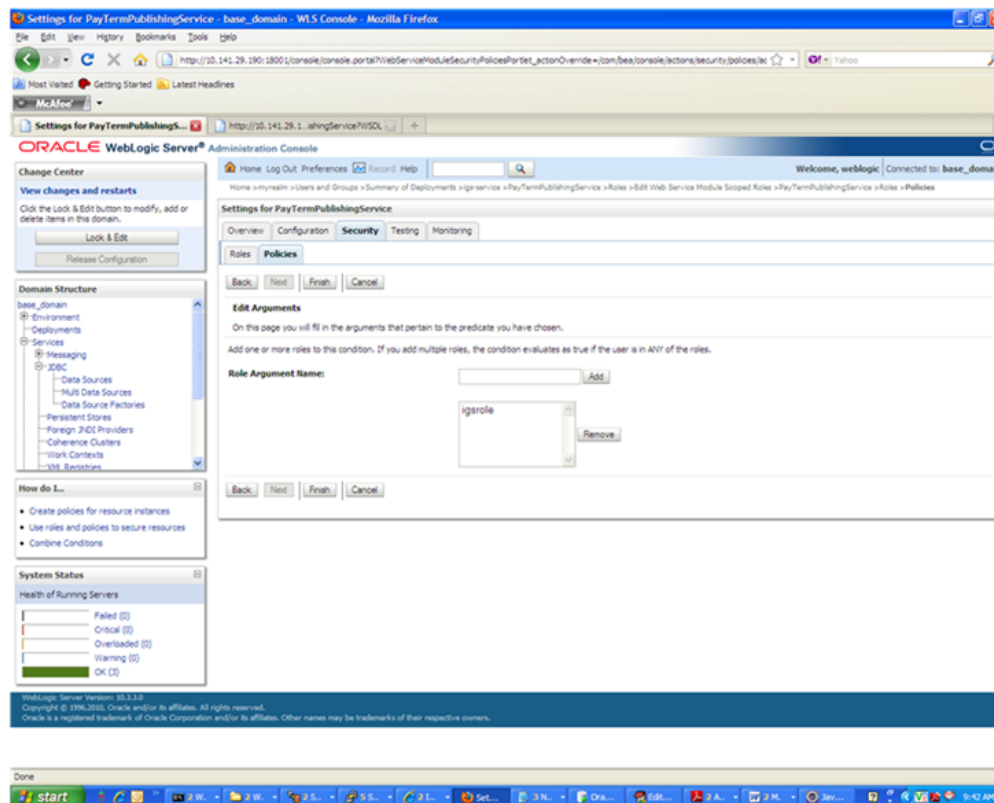

18. In the Role Argument Name field, enter the role name created earlier. Click **Add**. The role name will move down to the box below the Add button. Click **Finish** to return to the Policy Conditions screen.
19. Click **Save**. The Policy Conditions screen is displayed with this message near the top: "Changes saved successfully."

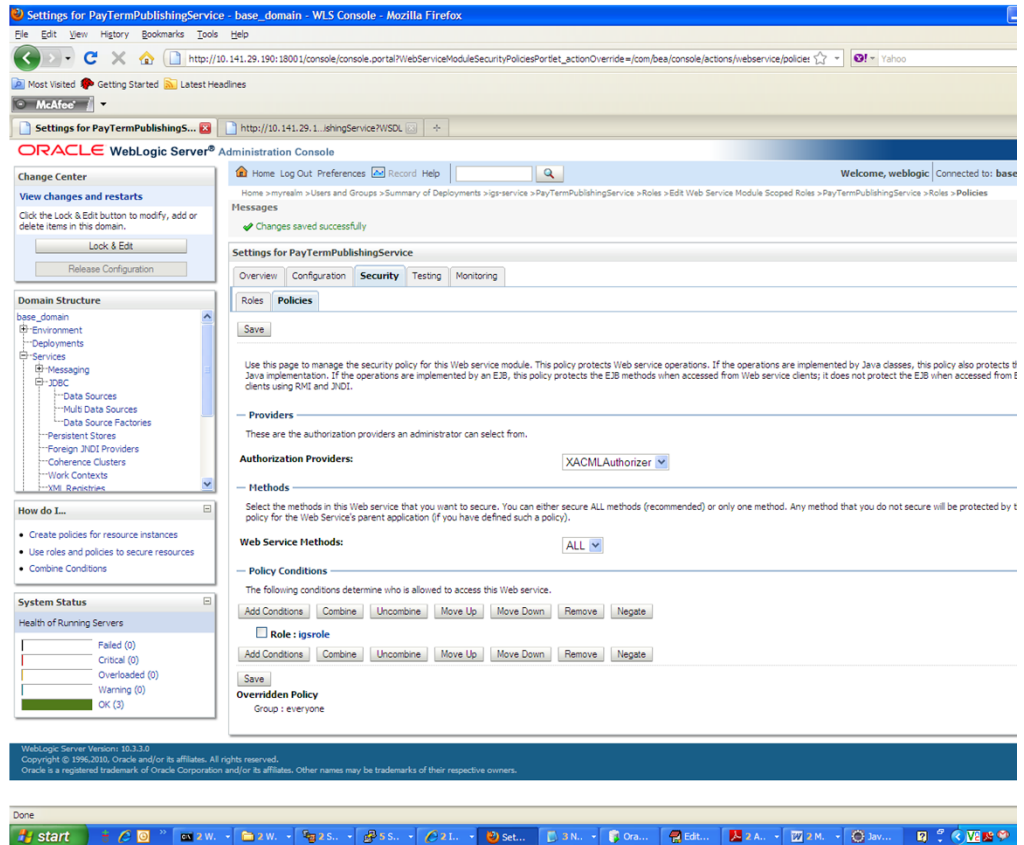

Client-side Setup for User Name and Password Authentication

The following is sample code for calling a secure IGS Web service.

Note: The following is sample code for invoking the PayTermPublishingService service. When you generate Java consumer for a Web service, the generated jar file contains classes specific to that Web service. Use the appropriate classes in the client code. Service namespace and WSDL location also should be changed accordingly.

```
package com.oracle.retail.rms.client;

import java.net.URL;
import java.util.ArrayList;
import java.util.List;
import java.util.Map;

import javax.xml.namespace.QName;
import javax.xml.ws.BindingProvider;

import com.oracle.retail.igs.integration.services.paytermpublishingservice.v1.PayTermPublishingPortType;
import com.oracle.retail.igs.integration.services.paytermpublishingservice.v1.PayTermPublishingService;
import
```

```

com.oracle.retail.igs.integration.services.paytermpublishingservice.v1.PublishPayT
ermCreateUsingPayTermDesc;
import
com.oracle.retail.igs.integration.services.paytermpublishingservice.v1.PublishPayT
ermCreateUsingPayTermDescResponse;
import com.oracle.retail.integration.base.bo.paytermdesc.v1.PayTermDesc;

import weblogic.wsee.security.unt.ClientUNTCredentialProvider;
import weblogic.xml.crypto.wss.WSSecurityContext;
import weblogic.xml.crypto.wss.provider.CredentialProvider;

import junit.framework.TestCase;

public class PayTermPublishingClient extends TestCase{
    public void testCreatePayTermDesc(){
        try{
            //qName is namespace of the service
            QName qName = new
            QName("http://www.oracle.com/retail/igs/integration/services/PayTermPublishingServ
            ice/v1", " PayTermPublishingService");

            // url is the URL of the WSDL of the web service
            URL url = new
            URL("http://ribhost.example.com:18030/PayTermPublishingBean/PayTermPublishingServi
            ce?WSDL");

            //create an instance of the web service
            PayTermPublishingServiceservice = new
            PayTermPublishingService (url,qName);
            PayTermPublishingPortType =
            service.getPayTermPublishingPort ();

            //set the security credentials in the service context
            List credProviders = new ArrayList();
            CredentialProvider cp = new ClientUNTCredentialProvider("<rms user>", "<rms
            password>");
            credProviders.add(cp);
            Map<String, Object> rc =
            ((BindingProvider)port).getRequestContext();
            rc.put(WSSecurityContext.CREDENTIAL_PROVIDER_LIST,
            credProviders);

            //populate the service method input object
            PayTermDesc payTermDesc = new PayTermDesc();
            payTermDesc.setTerms("terms");
            PublishPayTermCreateUsingPayTermDesc payTermCreateDesc = new
            PublishPayTermCreateUsingPayTermDesc();
            payTermCreateDesc.setPayTermDesc (payTermDesc);

            //call the web service
            PublishPayTermCreateUsingPayTermDescResponse
            response = port.publishPayTermCreateUsingPayTermDesc (payTermCreateDesc, "1");

            System.out.println ("response="+response);
        }catch(Exception e){
            e.printStackTrace();
        }
    }
}

```


Server-side Setup for Encrypted User Name and Password Token Authentication

WebLogic provides predefined policy files for securing Web services. This section describes the process required to secure a Web service where user name and password are encrypted and signed. Below are the steps to secure the Web service.

1. Follow the steps to attach the policy file to the Web service described in the section, "[Attach Policy File to the Web Service](#)," with this exception: In Step 7, select "policy:Wssp1.2-2007-Wss1.1-UsernameToken-Plain-X509-Basic256.xml" (instead of policy:usertoken.xml). Follow the remaining steps as shown.

After attaching the policy file, the header for the WSDL of the Web service contains the following.

```
<wsp:UsingPolicy wssutil:Required="true"/>
<wsp:Policy
wssutil:Id="Wssp1.2-2007-Wss1.0-UsernameToken-Plain-X509-Basic256.xml">
<ns1:AsymmetricBinding
xmlns:ns1="http://docs.oasis-open.org/ws-sx/ws-securitypolicy/200702">
<wsp:Policy>
<ns1:InitiatorToken>
<wsp:Policy>
<ns1:X509Token
ns1:IncludeToken="http://docs.oasis-open.org/ws-sx/ws-securitypolicy/200702/IncludeToken/AlwaysToRecipient">
<wsp:Policy>
<ns1:WssX509V3Token10/>
</wsp:Policy>
</ns1:X509Token>
</wsp:Policy>
</ns1:InitiatorToken>
<ns1:RecipientToken>
<wsp:Policy>
<ns1:X509Token
ns1:IncludeToken="http://docs.oasis-open.org/ws-sx/ws-securitypolicy/200702/IncludeToken/Never">
<wsp:Policy>
<ns1:WssX509V3Token10/>
</wsp:Policy>
</ns1:X509Token>
</wsp:Policy>
</ns1:RecipientToken>
<ns1:AlgorithmSuite>
<wsp:Policy>
<ns1:Basic256/>
</wsp:Policy>
</ns1:AlgorithmSuite>
<ns1:Layout>
<wsp:Policy>
<ns1:Lax/>
</wsp:Policy>
</ns1:Layout>
<ns1:IncludeTimestamp/>
<ns1:ProtectTokens/>
<ns1:OnlySignEntireHeadersAndBody/>
</wsp:Policy>
</ns1:AsymmetricBinding>
<ns2:SignedEncryptedSupportingTokens
xmlns:ns2="http://docs.oasis-open.org/ws-sx/ws-securitypolicy/200702">
<wsp:Policy>
<ns2:UsernameToken
```

```
ns2:IncludeToken="http://docs.oasis-open.org/ws-sx/ws-securitypolicy/200702/IncludeToken/AlwaysToRecipient">
<wsp:Policy>
<ns2:WssUsernameToken10/>
</wsp:Policy>
</ns2:UsernameToken>
</wsp:Policy>
</ns2:SignedEncryptedSupportingTokens>
<ns3:Wss10
xmlns:ns3="http://docs.oasis-open.org/ws-sx/ws-securitypolicy/200702">
<wsp:Policy>
<ns3:MustSupportRefKeyIdentifier/>
<ns3:MustSupportRefIssuerSerial/>
</wsp:Policy>
</ns3:Wss10>
</wsp:Policy>
```

-
2. The key combination used by the client to sign the message is a valid one for the server. The client certificate must be signed with a certificate authority that is trusted by the server.
3. WebLogic instances include a demo CA. The certificate and key for it is in \$WLS_HOME/Middleware/wlserver/server/lib/CertGenCA.der and CertGenCAKey.der. The key does not appear to change between WebLogic installations and is trusted by the default DemoTrust store. For this reason, the DemoTrust store must never be enabled in a production environment. Otherwise anybody can become "trusted" fairly easily.
4. WebLogic CertGen command can be used for generating keys of the correct key length and signing them with the demo CA noted above. A client certification/key pair is required to sign the outgoing message and server certificate to encrypt the critical information.

```
java -classpath $WLS_HOME/Middleware/wlserver/server/lib/weblogic.jar
utils.CertGen -certfile ClientCert -keyfile ClientKey -keyfilepass ClientKey
-cn <rms user>
```

The above command generates the following files.

- ClientCert.der
- ClientCert.pem
- ClientKey.der
- ClientKey.pem

The user name is <rms user>. Replace it with the user name of the user who will access the Web service.

-
-
-
-
5. The command below generates the four files that follow it.

```
java -classpath $WLS_HOME/Middleware/wlserver/server/lib/weblogic.jar
utils.CertGen -certfile ServerCert -keyfile ServerKey -keyfilepass ServerKey
-cn <rms user>
```

- ServerCert.der
- ServerCert.pem
- ServerKey.der
- ServerKey.pem

The user name is `<rms user>`. Replace it with user name of the user who will access the Web service

6. Using the following commands, import the files into key stores.

```
java -classpath $WLS_HOME/Middleware/wlserver/server/lib/weblogic.jar
utils.ImportPrivateKey -certfile ClientCert.der -keyfile ClientKey.der
-keyfilepass <Client Key Password> -keystore ClientIdentity.jks -storepass
<Client Key Password> -alias identity - keypass <Client Key Password>
```

```
java -classpath $WLS_HOME/Middleware/wlserver/server/lib/weblogic.jar
utils.ImportPrivateKey -certfile ServerCert.der -keyfile ServerKey.der
-keyfilepass <Server Key Password> -keystore ServerIdentity.jks -storepass
<Server Key Password> -alias identity - keypass <Server Key Password>
```


7. Using the script in [Appendix: configWss.py](#), configure the WebLogic server to use the key. Copy the script and save it in the location from which it will run.

```
Java -classpath $WLS_HOME/Middleware/wlserver/server/lib/weblogic.jar
weblogic.WLST configWss.py <weblogicuser> <weblogicpassword> <weblogichost>
<weblogic admin port> ServerIdentity.jks ServerKey identity ServerKey
```

For example:

```
Java -classpath $WLS_HOME/Middleware/wlserver/server/lib/weblogic.jar
weblogic.WLST configWss.py <weblogic user> <weblogic password> localhost
7001/home/wls/ServerIdentity.jks ServerKey identity ServerKey
```

8. In the WebLogic logic console, check the Web Service Security tab to verify that the command ran properly. Note that the default_ww configuration is used for all Web services unless otherwise indicated.

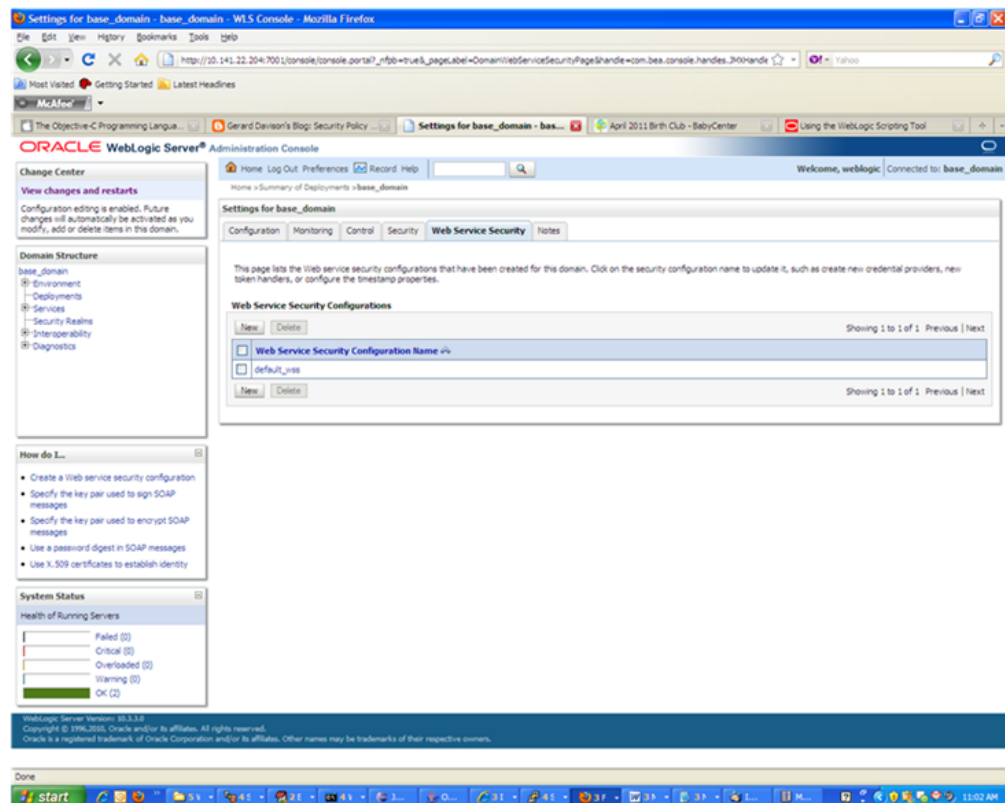

9. After the certificate setup is completed for the Web service, follow the steps in the "Create Roles and Users" section to create a user in WebLogic to access the Web service.
10. Restart the server. Create a client to invoke the Web service.

Client-side Setup for Encrypted User Name and Password Token Authentication

Below is sample code for calling a Web service that is secured using the policy file, policy:Wssp1.2-2007-Wss1.1-UsernameToken-Plain-X509-Basic256.xml.:

```
package com.test;
import java.net.URL;
import java.security.cert.X509Certificate;
import java.util.ArrayList;
import java.util.List;
import java.util.Map;

import javax.xml.namespace.QName;
import javax.xml.ws.BindingProvider;
import javax.xml.ws.WebServiceRef;

import
com.oracle.retail.igs.integration.services.paytermpublishingservice.v1.PayTermPubl
ishingPortType;
import
com.oracle.retail.igs.integration.services.paytermpublishingservice.v1.PayTermPubl
ishingService;
import
com.oracle.retail.igs.integration.services.paytermpublishingservice.v1.PublishPayT
ermCreateUsingPayTermDesc;
import
com.oracle.retail.igs.integration.services.paytermpublishingservice.v1.PublishPayT
ermCreateUsingPayTermDescResponse;
import com.oracle.retail.integration.base.bo.paytermdesc.v1.PayTermDesc;

import weblogic.security.SSL.TrustManager;
import weblogic.wsee.security.bst.ClientBSTCredentialProvider;
import weblogic.wsee.security.unt.ClientUNTCredentialProvider;
import weblogic.wsee.security.util.CertUtils;
import weblogic.xml.crypto.wss.WSSecurityContext;
import weblogic.xml.crypto.wss.provider.CredentialProvider;
public class Client {
public static void main(String args[]){
try{
//qName is namespace of the service
QName qName = new
QName("http://www.oracle.com/retail/igs/integration/services/PayTermPublishingServ
ice/v1", " PayTermPublishingService");

// url is the URL of the WSDL of the web service
URL url = new
URL("http://<host>:<port>/PayTermPublishingBean/PayTermPublishingService?WSDL");

//create an instance of the web service
PayTermPublishingServiceservice = new PayTermPublishingService(url,qName);
PayTermPublishingPortType = service.getPayTermPublishingPort ();
PayTermDesc payTermDesc = new PayTermDesc();
payTermDesc.setTerms("terms");
PublishPayTermCreateUsingPayTermDesc payTermCreateDesc = new
```

```
PublishPayTermCreateUsingPayTermDesc();
payTermCreateDesc.setPayTermDesc(payTermDesc);
String serverCertFile = "D:/head/retail-soa-enabler/dist/client/ServerCert.der";
String clientKeyStore =
"D:/head/retail-soa-enabler/dist/client/ClientIdentity.jks";
String clientKeyStorePass = "ClientKey";
String clientKeyAlias = "identity";
String clientKeyPass = "ClientKey";
List credProviders = new ArrayList();
ClientUNTCredentialProvider unt = new "<rms user>", "<rms password>";
credProviders.add(unt);
final X509Certificate serverCert =
(X509Certificate)CertUtils.getCertificate(serverCertFile);
serverCert.checkValidity();
CredentialProvider cp = new ClientBSTCredentialProvider(clientKeyStore,
clientKeyStorePass,clientKeyAlias, clientKeyPass, "JKS", serverCert);
credProviders.add(cp);
Map requestContext = ((BindingProvider)port).getRequestContext();
requestContext.put(WSSecurityContext.CREDENTIAL_PROVIDER_LIST, credProviders);
requestContext.put(WSSecurityContext.TRUST_MANAGER, new TrustManager() {
public boolean certificateCallback(X509Certificate[] chain,int validateErr) {
boolean result = chain[0].equals(serverCert);
return result;
}
});
PublishPayTermCreateUsingPayTermDescResponse response =
port.publishPayTermCreateUsingPayTermDesc(payTermCreateDesc, "1");
System.out.println("response="+response);
}catch(Exception e){
e.printStackTrace();
}
}
}
```


This chapter explains how to securely configure Oracle Retail Integration Bus applications and related tools.

Security in RIB Application Builder

RIB Application Builder is a tool for building and deploying RIB applications on the WebLogic server. The `rib-deployment-env-info.xml` file is the single source of all values used in the RIB App Builder tools. It is the only (or should be the only) file that requires editing. The RIB Installer gathers the appropriate values from the user, constructs the file, and invokes the appropriate tools.

This file contains all the configuration information required for building RIB applications. Below is a sample for AQ configuration details:

```
<aq-jms-server jms-server-id="jms1">
<jms-server-home>linux1@linux1:/home/oracle/oracle/product/12.1.0.2/db_
1</jms-server-home>
<jms-url>jdbc:oracle:thin:@linux1:1521:ora12c</jms-url>
<jms-port>1521</jms-port>
<jms-user-alias>jms1_user-name-alias</jms-user-alias>
</aq-jms-server>
```

This file does not contain the user name and password for connecting to the application server or databases. Rather, it contains the alias for each user name/password combination. This alias refers to the user name/password stored in a secured wallet file. The wallet file is created when the user runs the application assembly tool during the RIB application building process.

The syntax for the application assembly command is as follows:

```
./rib-app-compiler.sh -setup-security-credential
```

The argument, `setup-security-credential`, must be used when running the `rib-app-compiler` for the first time. It prompts the user to enter user names and passwords required to install RIB components. It stores details as credentials in a wallet file inside the `rib-home/deployment-home/conf/security/` directory. The credentials are retrieved and used by the deployer when installing RIB components.

Only the operating system user who created the wallet file with the RIB application assembly tool has read and write access to the file. Other users do not have permission to access the file. The file permissions are set up during the post-deployment phase for RIB applications.

See the "Application Builder" chapter in the *Oracle Retail Integration Bus Operations Guide* for details about the RIB Application Builder.

Note: Users also can change user names and passwords for RIB applications after deploying them. Refer to the section, "setup-security-credential," under "RIB App Builder Tools" in the "Application Builder" chapter in *Oracle Retail Integration Bus Operations Guide* for how to change RIB user names and passwords after deployment.

Security in RIB Deployment Configuration File Editor

The RIB Deployment Configuration File Editor is an application used to configure the `rib-deployment-env-info.xml` file, following installation. It provides a user interface for adding, removing, and rearranging the elements of the RIB configuration.

This tool has fields for entering user names and passwords required for connecting to application server and databases. Values entered in the password field in the tool are displayed as a series of asterisks (one for each character). The values entered in this field are stored in the secured wallet file in the `rib-home/deployment-home/conf/security/` directory.

For information about the RIB Deployment Configuration File Editor, see the section, "RIB Deployment Configuration File Editor," in the "Application Builder" chapter in the *Oracle Retail Integration Bus Operations Guide*.

Security during RIB Deployment Process

Users can run the RIB application assembly tool to build RIB application `.ear` files. The generated `.ear` files contain deployment descriptors for data sources used by RIB runtime to connect to the application database and the error hospital database. The deployment descriptors contain the user name for accessing the database, but the passwords are not stored there. During the deployment process for the RIB application, the passwords are read from the wallet file and encrypted using a WebLogic utility. The encrypted passwords are added in a WebLogic deployment plan that is uploaded on the server along with the `.ear` file.

Security during RIB Runtime

During the runtime process, the RIB application must make JMX calls to the JMX server. WebLogic instance user name and password are required to make connections to the JMX server. This information is stored in a secured wallet file, the path to which is stored in the `rib-system.properties` file.

For information about the properties in `rib-system.properties` file, see the "rib-system.properties" section in the "Backend System Administration and Logging" chapter of the *Oracle Retail Integration Bus Operations Guide*.

Only the operating system user who created them has read and write access to the properties files created during the RIB application deployment process. Other users do not have permission to access the files. Permissions are granted during the post deployment phase for RIB applications.

RIB Administration Security

There are two categories of administrators in RIB: RIB System Administrators and RIB Application Administrators. The defined realms, roles, and users differ according to administrator type.

RIB System Administrators install, configure, and deploy defect fixes—and make sure that integration infrastructure is up and running properly.

RIB Application Administrators handle the business side of the integration system. Primarily, they bring RIB adapters up or down and fix data issues with message payloads through RIHA.

RIB Application Administrators Security Domain

The WebLogic server has a default security realm. For each rib-`<app>.ear` deployed, RIB creates a user in the default security realm. By default, RIB creates a user that belongs to the ribAdminGroup and administrators groups. RIB system administrators can manage rib-`<app>` application users and access control through the WebLogic Server Administration Console. The default group and user that RIB creates must not be deleted or modified.

The user created in ribAdminGroup has access to the RIB administration GUI. When a RIB application administrator tries to access the RIB administration GUI, a basic authentication screen is displayed, where the user must provide a user name and password for authentication. The user name must be the same as the one created by RIB in ribAdminGroup. When the credentials are verified, the RIB administration GUI home page is displayed.

Multiple User Configuration

To create new users to logon to the RIB Administration GUI, follow these steps:

1. Login to the WebLogic console and navigate to Home >Summary of Security Realms >myrealm >Users and Groups location.
2. Create a new user, for example: testuser.
3. Navigate to the details of the new user.
4. On the Groups tab, choose the created group(ribAdminGroup) from list.

For example: Home > Summary of Security Realms > Summary of Deployments > Summary of Security Realms > myrealm > Users and Groups > testuser.

RIB System Administrators Security Domain

The RIB System Administrators primarily focus on managing access to RIB's JMS server, application server instances, RIB Hospital database, and the rib-home workspace. RIB must be deployed with the default WebLogic administration user.

Note: For details on external LDAP configurations, see Appendix A in the *Oracle Retail Integration Bus Implementation Guide*.

Security in RIHA

Oracle Retail Integration Bus Hospital Administration or RIB Hospital Administration (RIHA) is a tool to manage RIB messages in the RIB hospital error tables. It is a Web application that is deployable on the WebLogic server.

For how to set up security for RIHA, see the "Security Setup Guidelines" section in the *Oracle Retail Integration Bus Hospital Administration Guide*.

Security in RDMT

The RIB Diagnostic and Monitoring Took Kit (RDMT) is a collection of command line tools for controlling and monitoring RIB applications. When used from within rib-home, RDMT loads configuration information from the rib-deployment-env-info.xml file. For user name and password information, it reads the wallet file created during the RIB application assembly process.

For information about RDMT, see the "Diagnostic and Monitoring Tools" chapter in the *Oracle Retail Integration Bus Operations Guide*.

Security in PL/SQL Application API Stubs

The plsqli-api-stubs is an API simulator designed to act as though RIB is connected to the application, but it can process specific status and other parameters from a "stubbed" application. This set of tools is designed to emulate those applications exposing PL/SQL APIs to RIB, such as RMS, ORFM, and RWMS. The tool reads and writes the user name and password for connecting to the database in a secured wallet file.

Security in Integration Gateway Services

The RIB Integration Gateway Services (IGS) component is a set of standard Simple Object Access Protocol (SOAP) based Web services that provide access to the RIB infrastructure. These Web services are generated using the Oracle Retail Service Enabler Tool. They should be secured after being deployed. For information, see "[Secure IGS Web Services Using the Administration Console](#)."

SSL Configuration

Secure Sockets Layer (SSL) provides secure connections by allowing two applications connecting over a network to authenticate each other's identity and encrypting the data exchanged between the applications. Configuring SSL in WebLogic servers in production environments is recommended. See WebLogic documentation for how to configure SSL in WebLogic. Below is the link to documentation for configuring SSL in WebLogic 12.2.1.2 server:

<https://docs.oracle.com/middleware/1221/wls/SECMG/ssl.htm#CIHBDHEG>

Deployment of RIB applications over SSL protocol is supported now by giving protocol values as https in deployment info xml.

Below are the steps for running RIB in SSL environment.

1. Configure SSL in the WebLogic server. (See WebLogic documentation for detailed steps.)
2. Keep the SSL ports of the WebLogic server instances open for RIB deployment.. Verify that the SSL port is open: In the WebLogic administration console, go to the Configuration > General page of the server instance. Verify that the "Listen Port Enabled" checkbox is checked and provide listen address to all managed servers/admin server.
3. Make sure that the rib-deployment-env-info.xml file has protocol specified as https and port numbers are https port numbers for WebLogic server instances.
4. While starting manages server provide admin server.

For example: `startManagedServer.sh rib-oms-server https://host:port`

5. Deploy the RIB applications.
6. Restart the WebLogic managed servers.
7. If required, non-SSL ports can be disabled as follows. In the WebLogic administration console go to the Configuration > General page of the server instance. Uncheck the "Listen Port Enabled" checkbox and check the "SSL Listen Port Enabled" checkbox. This is an optional step and must be done only when all communications with the server are over HTTPS protocol.

Note: Due to known vulnerabilities, Oracle recommends disabling SSLv3 in all products. We recommend using the TLSv1.2 protocol. WebLogic server can be configured to use the TLSv1.2 protocol by adding the following line in the `setDomainEnv.sh`. Restart the server after making the change.

```
JAVA_OPTIONS=" $JAVA_OPTIONS  
-DwebLogic.security.SSL.minimumProtocolVersion=TLSv1.2"
```


Appendix: RIB Application Installer Screens

You will need the following details about your environment for the installer to successfully deploy the RIB applications. Depending on the options you select, you may not see some screens.

Screen: Welcome Page




Screen: Define Scope

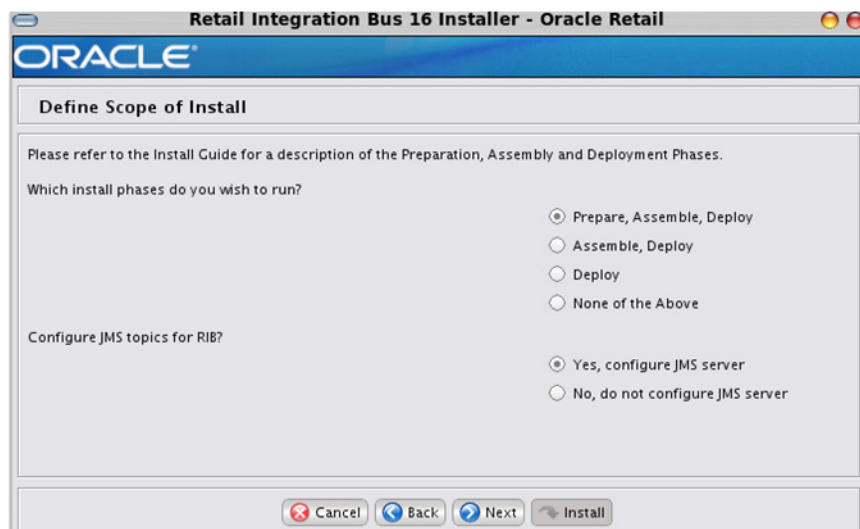

Field Title	Which installation phases do you wish to run?
Field Description	Used by the installer's build.xml to determine which phases to run during the installation. Each installation phase will run a different command-line tool. Preparation Phase: check-version-and-unpack.sh Assembly Phase: rib-app-compiler.sh Deployment Phase: rib-app-deployer.sh -deploy-rib-func-artifact-war and/or rib-app-deployer.sh -deploy-rib-app-ear rib-<app>


Field Title	Configure JMS topics for RIB?
Field Description	Used by the installer's build.xml to determine whether to configure the JMS topics. Will run the command-line tool: rib-app-deployer.sh -prepare-jms

Screen: Provide Inputs to Installer?

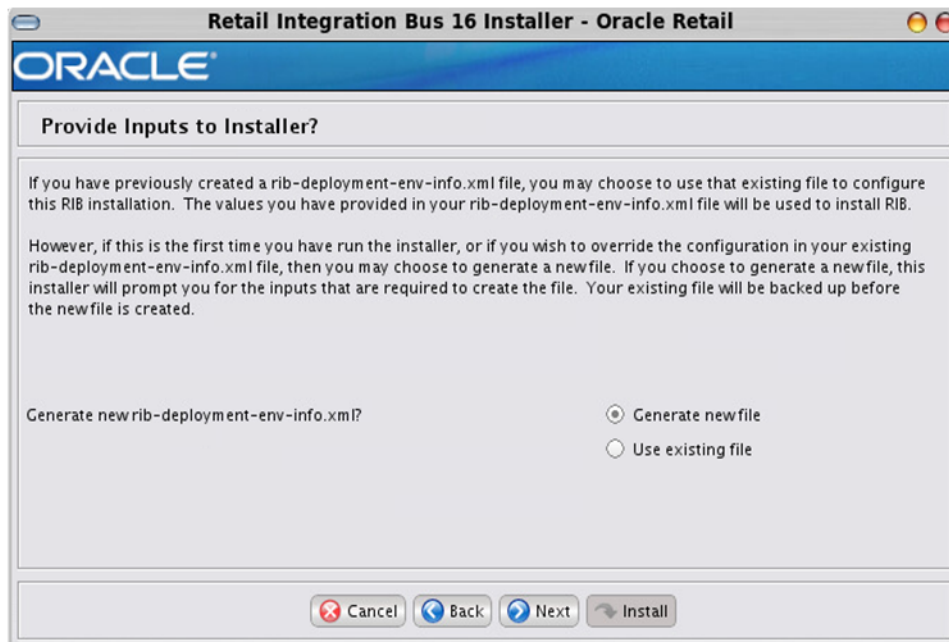

Field Title	Generate new config file?
Field Description	Used by the installer to determine whether to prompt user for inputs needed to generate the rib-deployment-env-info.xml file. Also used by the installer's build.xml to determine whether or not to actually generate the new file.

Screen: JMS Server Configuration

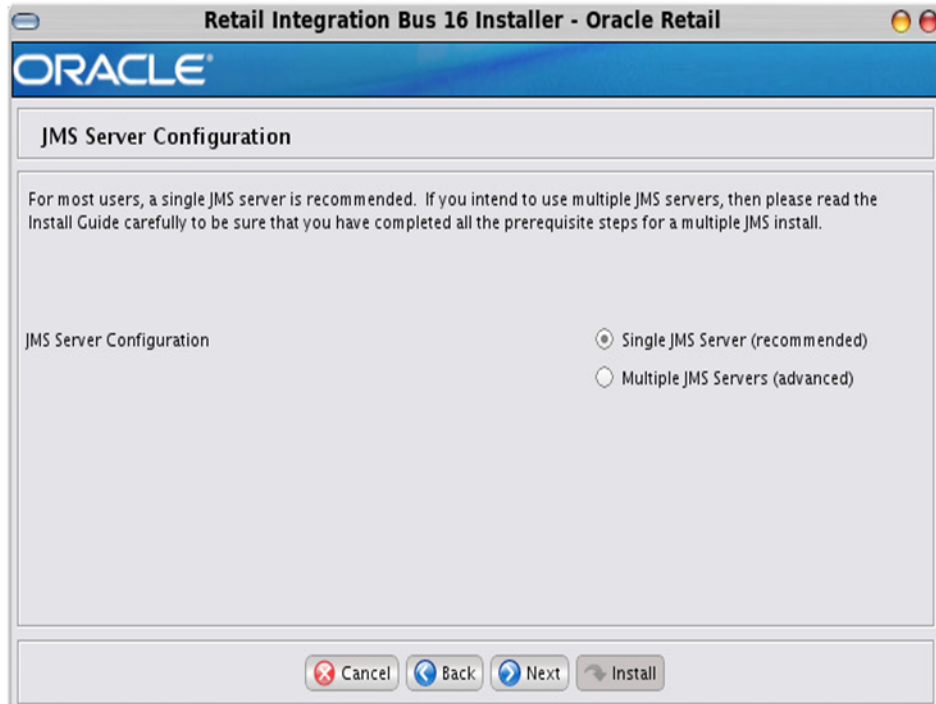

Field Title	JMS Server Configuration
Field Description	Used by the installer to determine how many sets of JMS server inputs should be collected from the user.

Screen: Prerequisites for Multiple JMS Server Configuration




Screen: Number of JMS Servers



Field Title	Total Number of JMS Servers
Field Description	Used by the installer to determine how many sets of JMS server inputs should be collected from the user.
Example	5

Screen: JMS Server 1

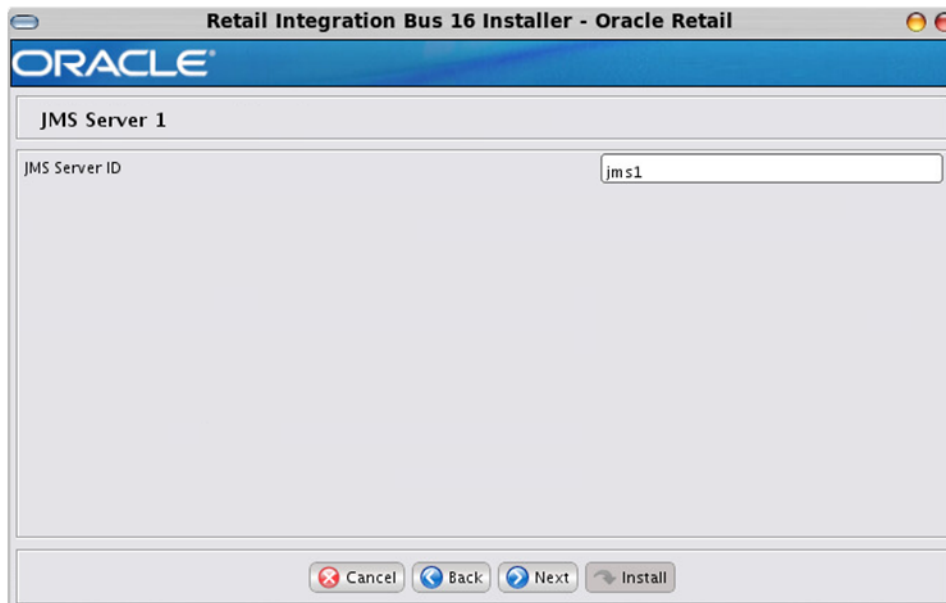

Note: The installer will request input for as many JMS servers as were chosen on the previous screen. There will be one input screen for each JMS server.

Field Title	JMS Server ID
Field Description	The name of the JMS server.

Field Title	JMS Server ID
Destination	rib-deployment-env-info.xml
Example	jms1

Screen: JMS Server 1 Details

Field Title	AQ1 JMS Server Home
Field Description	The AQ1 JMS server home
Destination	rib-deployment-env-info.xml
Example	oracle@myhost:/u01/oradata

Field Title	AQ1 JMS URL
Field Description	The AQ1 JMS URL
Destination	rib-deployment-env-info.xml
Example	oracle@myhost:/u01/oradata


Field Title	AQ1 JMS Port
Field Description	The AQ1 JMS port
Destination	rib-deployment-env-info.xml
Example	1521

Field Title	AQ1 JMS User
Field Description	The AQ1 JMS user
Destination	rib-deployment-env-info.xml

Field Title	AQ1 JMS Password
Field Description	The AQ1 JMS password.
Destination	rib-deployment-env-info.xml

Field Title	AQ1 JMS Alias
Field Description	The alias is used by the application to access user names and passwords in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Screen: Security Details

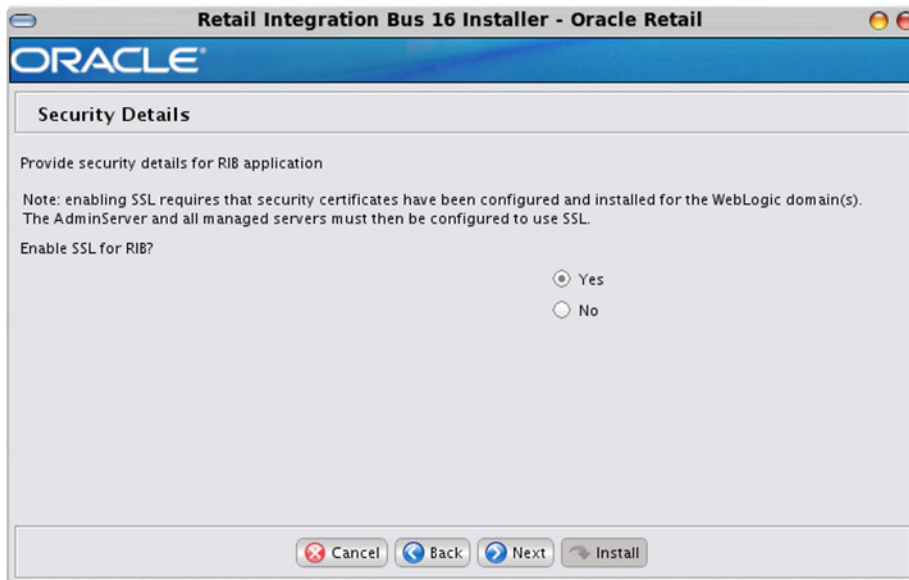

Field Title	Enable SSL for RIB
Field Description	Option to deploy RIB to a secured environment, by selecting enable SSL flag to YES and providing SSL port while configuring wls. RIB deployed to SSL enabled WebLogic server. By setting Enable SSL for RIB to No, RIB will be deployed to a non SSL environment
Example	YES/NO

Screen: Number of WebLogic Installations



Field Title	Total Number of Oracle WebLogic Server Installations
Field Description	The number of different WebLogic Servers to which your rib-<app> applications will be installed. The installer uses this information to determine how many Oracle WebLogic servers it must request input for.
Example	1

Screen: WebLogic Instance <X> Details



Note: The installer will request input for as many Oracle WebLogic servers as were chosen on the previous screen. There will be one input screen for each Oracle WebLogic server.

Field Title	WebLogic Domain Name
Field Description	Your App Server's domain name.
Destination	rib-deployment-env-info.xml
Example	rib_domain

Field Title	WebLogic Domain Home
Field Description	The format should be: <user>@<host>:<WEBLOGIC_DOMAIN_HOME> where <user> is the user who owns the files in the ORACLE_HOME <host> is the name or IP address of the server where the App Server is installed <WEBLOGIC_DOMAIN_HOME> is the filesystem path to the installed domain.
Destination	rib-deployment-env-info.xml
Example	myuser@myhost:/path/to/weblogic/domain/home

Field Title	WebLogic Admin User
Field Description	The WebLogic admin user for this WebLogic instance.
Destination	rib-deployment-env-info.xml


Field Title	WebLogic Admin Password
Field Description	The WebLogic admin password for this WebLogic instance.
Destination	rib-deployment-env-info.xml

Field Title	WebLogic Admin Alias
Field Description	The alias is used by the application to access user names and passwords in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	weblogic-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Field Title	WebLogic Admin Port
Field Description	The port used to access the AdminServer for this domain. It is found in \$WEBLOGIC_DOMAIN_HOME/config/config.xml.
Destination	rib-deployment-env-info.xml
Example	7001


Field Title	Java Home
Field Description	The JDK in the ORACLE_HOME.
Destination	rib-deployment-env-info.xml
Example	/path/to/jdk

Screen: Choose Apps to Install

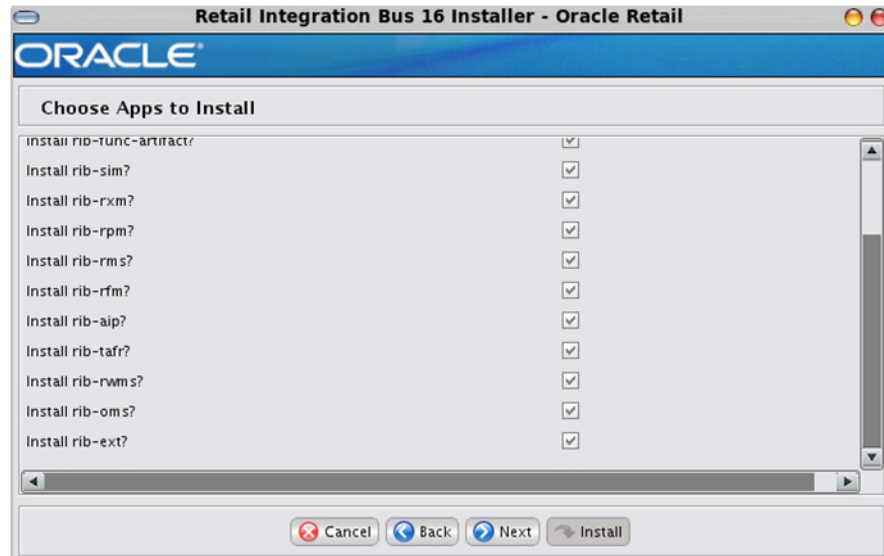

Field Title	Install rib-<app>
Field Description	Used by the installer's build.xml to determine which applications to deploy during the Deployment Phase. Tick the checkbox for the applications which are in scope of deployment (eg: rib-ext). This screen may also be shown if you have chosen not to run the Deployment Phase, but have chosen to generate a new rib-deployment-env-info.xml file. In this case, it is used by the installer to determine the input to request from the user to create the rib-deployment-env-info.xml file.
Destination	rib-deployment-env-info.xml

Screen: Set Email Defaults

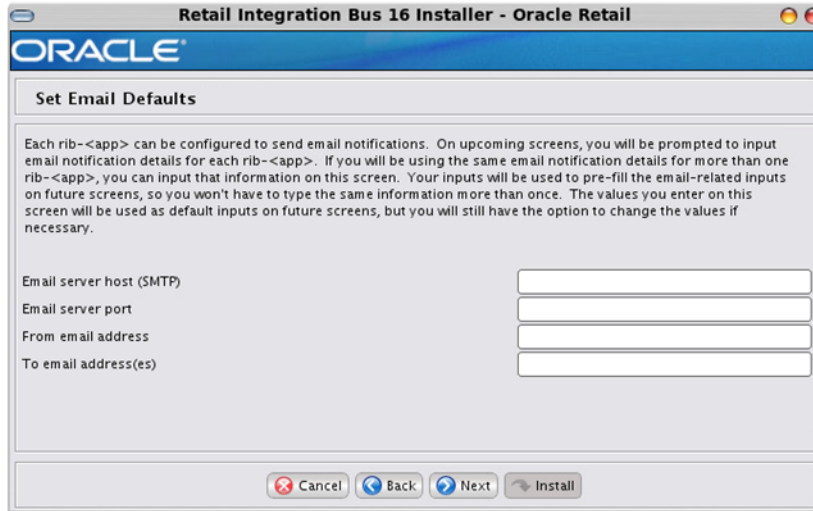


Field Title	Email server host (SMTP)
Field Description	If you are going to use the same email host for multiple rib-<app> applications, you can enter it here.
Example	smtp.example.com

Field Title	Email server port
Field Description	If you are going to use the same email port for multiple rib-<app> applications you can enter it here.
Example	25

Field Title	From email address
Field Description	If you are going to use the same email originator address for multiple rib-<app> applications you can enter it here.
Example	rib@example.com

Field Title	To email addresses
Field Description	If you are going to use the same email recipients list for multiple rib-<app> applications you can enter it here.
Example	name1@example.com, name2@example.com

Screen: Choose App Server for rib-<app>

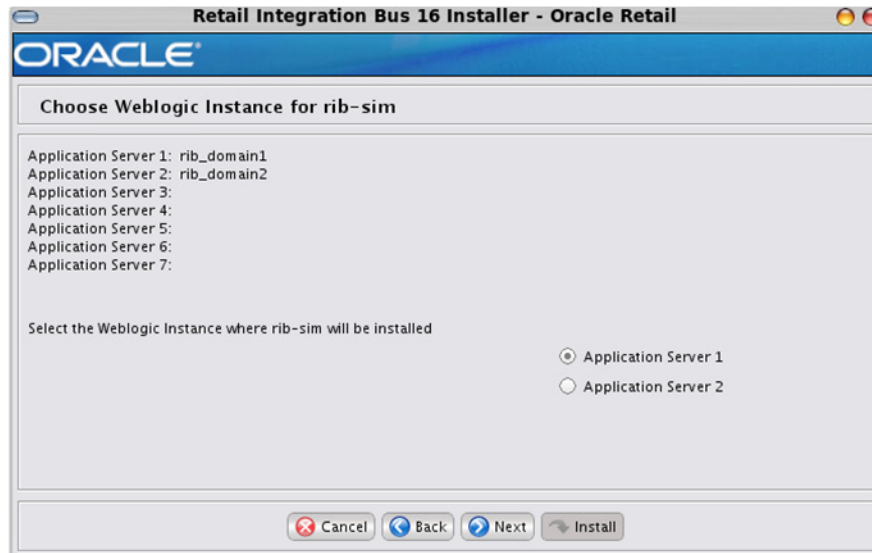

Note: The screen capture above shows rib-sim. There are similar screens for rib-func-artifacts and for each other rib-<app> that you have chosen to install.

Field Title	Select the App Server where rib-<app> will be installed
Field Description	Used by the installer's build.xml to determine the application server with which to associate the rib-<app>'s WLS instance. Note: The installer requests this information for rib-func-artifact, even if you have chosen to install rib-func-artifact at this time. The reason is that the rib-func-artifact inputs must exist in the rib-deployment-env-info.xml file to deploy any rib-<app>.
Destination	rib-deployment-env-info.xml

Screen: rib-<app> Install Type

rib-sim can be deployed as soap-app or javaee-app . In case of hybrid cloud scenario in which app is on-premise and rib-<app> is on cloud communication between two will be over the internet (http/https protocol).

Pick the appropriate type from the options.



Screen: rib-<app> WLS Details



Note: The screen capture above shows the WLS details input screen for rib-sim. Depending on which rib-<app> applications you are installing, the installer may display one or more input screens for each rib-<app>.

Field Title	rib-<app> WLS Instance Name
Field Description	The name of the WebLogic managed server instance where the rib-<app> will be deployed.
Destination	rib-deployment-env-info.xml
Example	rib-sim-wls-instance

Field Title	rib-<app> WLS Instance Home
Field Description	The format should be as follows: <user>@<host>:<WEBLOGIC_DOMAIN_HOME>/servers /<wls-instance> where: <user> is the user who owns the files in the ORACLE_HOME <host> is the name or IP address of the server where the App Server is installed <WEBLOGIC_DOMAIN_HOME> is the filesystem path to the WEBLOGIC_DOMAIN_HOME <wls-instance> is the WebLogic managed server instance name
Destination	rib-deployment-env-info.xml
Example	myuser@myhost://<WEBLOGIC_DOMAIN_ HOME>/servers/rib-sim-wls-instance

Field Title	rib-<app> WLS Instance port number
Field Description	The port number used by this WebLogic managed server instance.
Destination	rib-deployment-env-info.xml
Example	7011

Field Title	rib-<app> WLS User
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	rib-<app> WLS Password
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	rib-<app> WLS Alias
Field Description	The alias is used by the application to access user names and passwords in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Screen: <app> Details



Note: The screen capture above shows the Details screen for SIM. Depending on which rib-`<app>` applications you are installing, you will see different details input screens. For some of the Oracle Retail applications, these inputs may appear on separate installer screens rather than all on one screen.

Field Title	<app> database URL
Field Description	JDBC URL for the database
Destination	rib-deployment-env-info.xml
Example	single instance thin client: jdbc:oracle:thin:@myhost:1521:mydb

Field Title	<app> database schema User
Field Description	Database user where the <app> database schema was installed
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Example	SIM_USER

Field Title	<app> database schema password
Field Description	Password for the <app> database schema user
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> database schema alias
Field Description	Alias for the <app> database schema user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Field Title	<app> JNDI URL
Field Description	URL used by rib-<app> to connect to the <app> application.
Destination	rib-deployment-env-info.xml
Example	t3://myhost:7111

Field Title	<app> JAAS User
Field Description	When rib-<app> authenticates to the <app> JNDI naming service through the URL in the previous field, it will provide this user name.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Example	weblogic

Field Title	<app> JAAS Password
Field Description	The password for the <app> JAAS user
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> JAAS Alias
Field Description	The alias for the <app> JAAS user stored in the wallet file cwallet.sso.
Destination	<rib-deployment-env-info.xml
Example	sim-jaas-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Screen: rib-<app> Admin GUI Details

Retail Integration Bus 16 Installer - Oracle Retail

ORACLE

SIM Admin GUI Details

Rib-sim Admin GUI AdminUser: ribadmin

Rib-sim Admin GUI AdminPassword: ●●●●●●

Rib-sim Admin GUI AdminAlias: sim_rib-admin-gui_admin-user-name-alias

Rib-sim Admin GUI OperatorUser: riboperator

Rib-sim Admin GUI OperatorPassword: ●●●●

Rib-sim Admin GUI OperatorAlias: i_rib-admin-gui_operator-user-name-alias

Rib-sim Admin GUI MonitorUser: ribmonitor

Rib-sim Admin GUI MonitorPassword: ●●●●●●

Rib-sim Admin GUI MonitorAlias: n_rib-admin-gui_monitor-user-name-alias

Cancel Back Next Install

Note: The screen capture above shows the Admin GUI Details screen for rib-sim. The installer may show similar screens for other rib-<app>, depending on which rib-<app> applications you are currently installing.

Field Title	<app> Admin GUI Admin User
Field Description	When logging in to the admin GUI for rib-<app>, use this user name. This user is in an admin role.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Example	ribadmin

Field Title	<app> Admin GUI Admin Password
Field Description	The password for the <app> Admin GUI user.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Notes	For WLS 12.2.1, passwords must include at least one numeral.

Field Title	<app> Admin GUI Admin Alias
Field Description	The alias for the <app> Admin GUI user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	rib-sim_rib-admin-gui_admin-user-name-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Field Title	<app> Admin GUI Operator User
Field Description	When logging in to the admin GUI for rib-<app>, use this user name. This user is in operator role, so will have limited access control in rib-admin-gui compared to adminrole.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Example	riboperator

Field Title	<app> Admin GUI Operator Password
Field Description	The password for the <app> Admin GUI operator user.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Notes	For WLS 12.2.1, passwords must include at least one numeral.

Field Title	<app> Admin GUI Operator Alias
Field Description	The alias for the <app> Admin GUI user stored in the wallet file cwallet.sso.


Field Title	<app> Admin GUI Operator Alias
Destination	rib-deployment-env-info.xml
Example	rib-sim_rib-admin-gui_operator-user-name-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Field Title	<app> Admin GUI Monitor User
Field Description	When logging in to the admin GUI for rib-<app>, use this user name. This user is in monitor role, so will have limited access control in rib-admin-gui compared to adminrole and operatorrole.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Example	ribmonitor

Field Title	<app> Admin GUI Monitor Password
Field Description	The password for the <app> Admin GUI operator user.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Notes	For WLS 12.2.1, passwords must include at least one numeral.

Field Title	<app> Admin GUI Monitor Alias
Field Description	The alias for the <app> Admin GUI user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	rib-sim_rib-admin-gui_monitor-user-name-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Screen: rib-<app> Email Notification Details

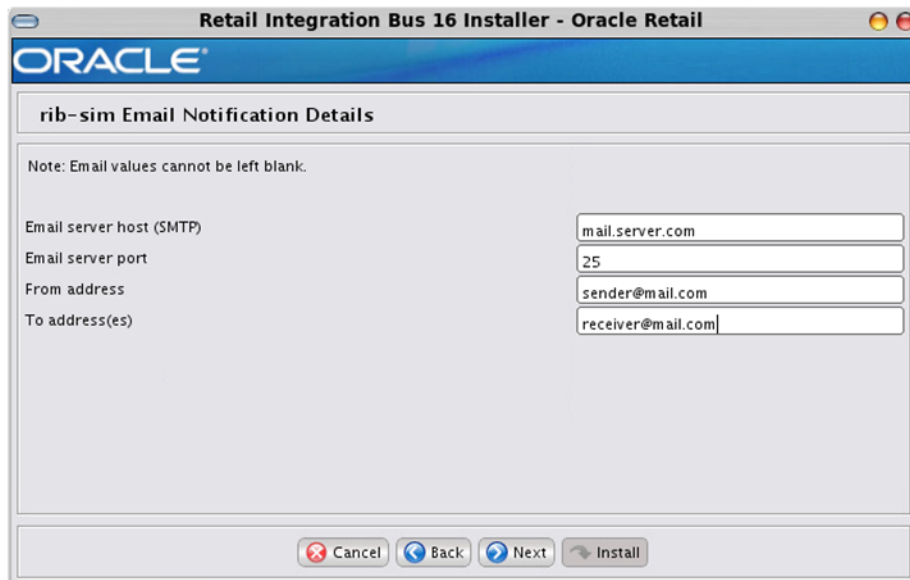

Note: The screen capture above shows the Email Notification Details screen for rib-sim. The installer may show similar screens for other rib-<app>, depending on which rib-<app> applications you are currently installing.

Field Title	Email server host (SMTP)
Field Description	The SMTP server that will be used to send notification emails from RIB.
Destination	rib-deployment-env-info.xml
Example	smtp.example.com

Field Title	Email server port
Field Description	The port for outgoing emails
Destination	rib-deployment-env-info.xml
Example	25

Field Title	From address
Field Description	The email address from which the rib-<app>email notifications will originate.
Destination	rib-deployment-env-info.xml
Example	rib@example.com

Field Title	To addresses
Field Description	List of recipients for rib-<app> email notifications.
Destination	rib-deployment-env-info.xml

Field Title	To addresses
Example	name1@example.com, name2@example.com

Screen: rib-oms WLS Details


Field Title	rib-<app> WLS Instance Name
Field Description	The name of the WebLogic managed server instance where the rib-<app> will be deployed.
Destination	rib-deployment-env-info.xml
Example	rib-oms-wls-instance

Field Title	rib-<app> WLS Instance Home
Field Description	The format should be as follows: <pre><user>@<host>:<WEBLOGIC_DOMAIN_HOME>/servers/<wls-instance></pre> where: <user> is the user who owns the files in the ORACLE_HOME <host> is the name or IP address of the server where the App Server is installed <WEBLOGIC_DOMAIN_HOME> is the filesystem path to the WEBLOGIC_DOMAIN_HOME <wls-instance> is the WebLogic managed server instance name
Destination	rib-deployment-env-info.xml
Example	myuser@myhost://<WEBLOGIC_DOMAIN_HOME>/servers/rib-oms-wls-instance

Field Title	rib-<app> WLS Instance port number
Field Description	The port number used by this WebLogic managed server instance.

Field Title	rib-<app> WLS Instance port number
Destination	rib-deployment-env-info.xml
Example	7011

Screen: OMS Details

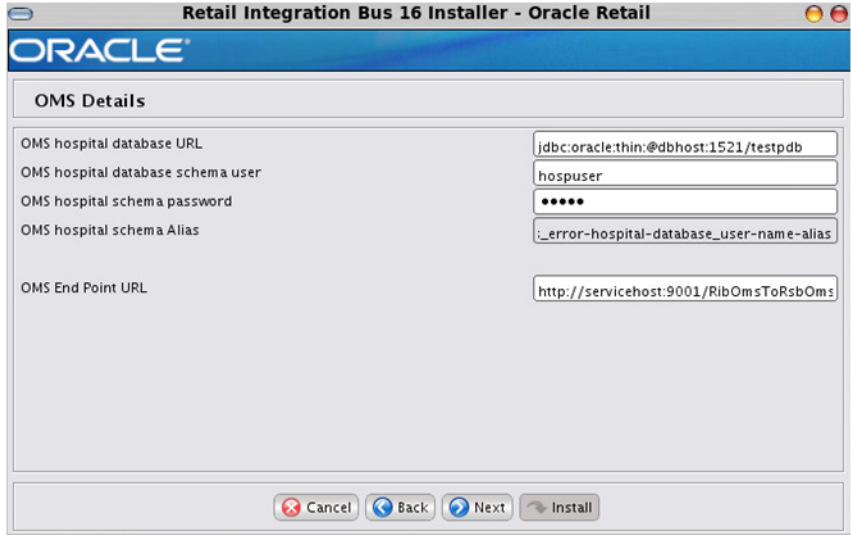

Field Title	<app> database URL
Field Description	JDBC URL for the database
Destination	rib-deployment-env-info.xml
Example	single instance thin client: jdbc:oracle:thin:@myhost:1521:mydb

Field Title	<app> database schema User
Field Description	Database user where the <app> database schema was installed
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> database schema password
Field Description	Password for the <app> database schema user
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> database schema alias
Field Description	Alias for the <app> database schema user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.


Field Title	<app> Endpoint url
Field Description	The application url of the oms application
Destination	rib-deployment-env-info.xml
Notes	The url of the oms application server with the port number assigned for oms.

Screen: Select a Policy for OMS



Field Title	Select the Policy name for OMS installation
Field Description	Policy that need to selected.
Notes	Appropriate policy need to be selected for non-secure / secure environment / message encryption. E.g: none/PolicyA/PolicyB

Screen: OMS Admin GUI Details

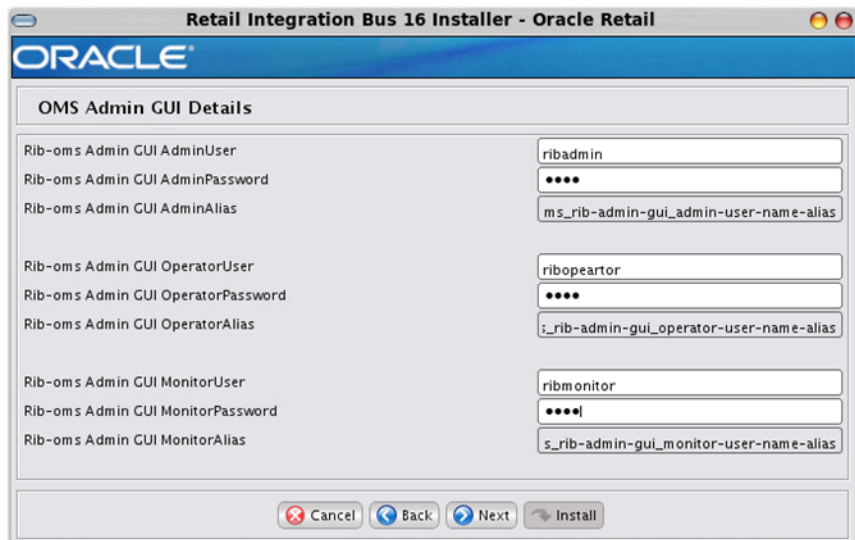

Field Title	<app> Admin GUI Admin User
Field Description	When logging in to the admin GUI for rib-<app>, use this user name.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> Admin GUI Admin Password
Field Description	The password for the <app> Admin GUI user.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Notes	For WLS 12.2.1, passwords must include at least one numeral.

Field Title	<app> Admin GUI Admin Alias
Field Description	The alias for the <app> Admin GUI user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	rib-oms_rib-admin-gui_admin-user-name-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Field Title	<app> Admin GUI Operator User
Field Description	<app> Admin GUI Operator User
Destination	When logging in to the admin GUI for rib-<app>, use this user name. This user is in operator role, so will have limited access control in rib-admin-gui compared to adminrole.
Example	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> Admin GUI Operator Password
Field Description	<app> Admin GUI Operator Password
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Notes	For WLS 12.2.1, passwords must include at least one numeral.

Field Title	<app> Admin GUI Operator Alias
Field Description	The alias for the <app> Admin GUI user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	rib-oms_rib-admin-gui_operator-user-name-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Field Title	<app> Admin GUI Monitor User
Field Description	When logging in to the admin GUI for rib-<app>, use this user name. This user is in monitor role, so will have limited access control in rib-admin-gui compared to adminrole and operatorrole.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Example	ribmonitor

Field Title	<app> Admin GUI Monitor Password
Field Description	The password for the <app> Admin GUI operator user.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Notes	For WLS 12.2.1, passwords must include at least one numeral.

Field Title	<app> Admin GUI Monitor Alias
Field Description	The alias for the <app> Admin GUI user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	rib-oms_rib-admin-gui_monitor-user-name-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Screen: rib-oms Email Notification Details

Field Title	Email server host (SMTP)
Field Description	The SMTP server that will be used to send notification emails from RIB.

Field Title	Email server host (SMTP)
Destination	rib-deployment-env-info.xml
Example	smtp.example.com

Field Title	Email server port
Field Description	The port for outgoing emails
Destination	rib-deployment-env-info.xml
Example	25


Field Title	From address
Field Description	The email address from which the rib-<app> email notifications will originate.
Destination	rib-deployment-env-info.xml
Example	rib@example.com

Field Title	To addresses
Field Description	List of recipients for rib-<app> email notifications.
Destination	rib-deployment-env-info.xml
Example	name1@example.com, name2@example.com


Screen: rib-ext Install Type

rib-ext can be deployed as soap-app or javaee-app . In case of hybrid cloud scenario in which app is on-premise and rib-<app> is on cloud communication between two will be over the internet (http/https protocol).

Pick the appropriate type from the options

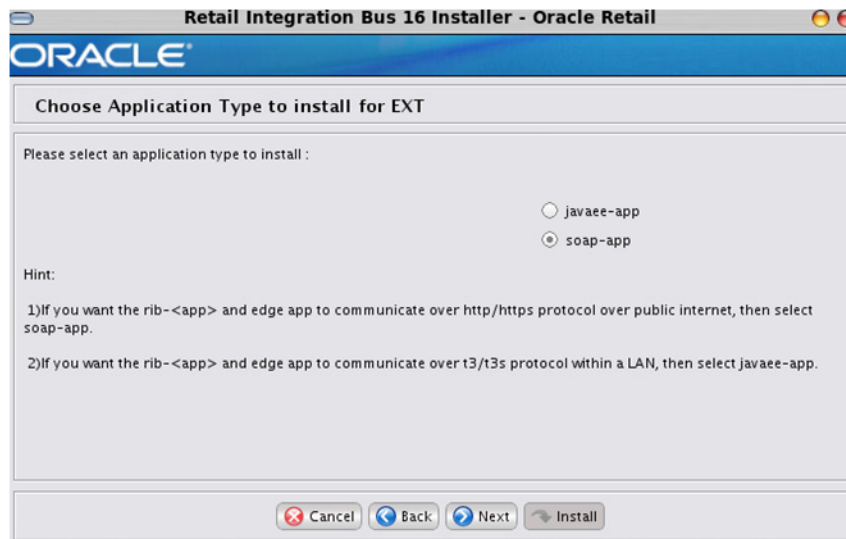

Screen: rib-extWLS Details

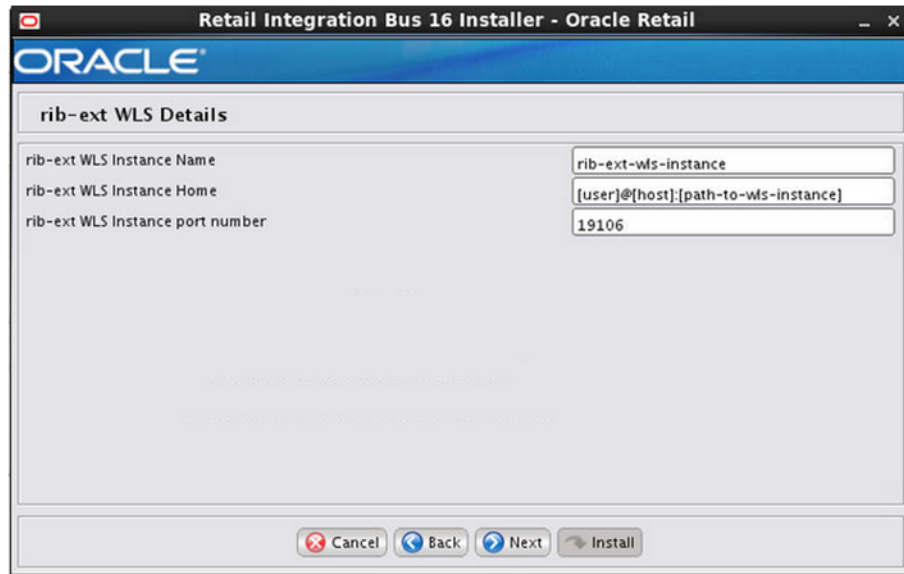


Field Title	rib-<app> WLS Instance Name
Field Description	The name of the WebLogic managed server instance where the rib-<app> will be deployed.
Destination	rib-deployment-env-info.xml
Example	rib-ext-wls-instance

Field Title	rib-<app> WLS Instance Home
Field Description	The format should be as follows: <user>@<host>:<WEBLOGIC_DOMAIN_HOME>/servers /<wls-instance> where: <user> is the user who owns the files in the ORACLE_HOME <host> is the name or IP address of the server where the App Server is installed <WEBLOGIC_DOMAIN_HOME> is the filesystem path to the WEBLOGIC_DOMAIN_HOME <wls-instance> is the WebLogic managed server instance name
Destination	rib-deployment-env-info.xml
Example	myuser@myhost://<WEBLOGIC_DOMAIN_ HOME>/servers/rib-ext-wls-instance

Field Title	rib-<app> WLS Instance port number
Field Description	The port number used by this WebLogic managed server instance.
Destination	rib-deployment-env-info.xml
Example	7011

Screen: Ext Details

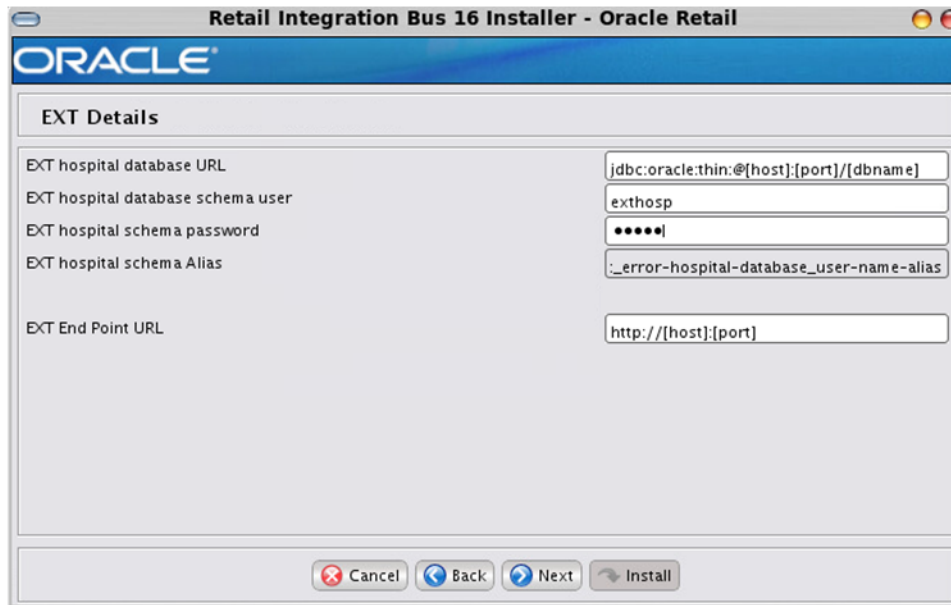

Field Title	<app> database URL
Field Description	JDBC URL for the database
Destination	rib-deployment-env-info.xml
Example	single instance thin client: jdbc:oracle:thin:@myhost:1521:mydb

Field Title	<app> database schema User
Field Description	Database user where the <app> database schema was installed
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso


Field Title	<app> database schema password
Field Description	Password for the <app> database schema user
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> database schema alias
Field Description	Alias for the <app> database schema user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Field Title	<app> Endpoint url
Field Description	The url of the thirdparty application
Destination	rib-deployment-env-info.xml


Field Title	<app> Endpoint url
Notes	The url of the thirdparty application server with the port number assigned for.

Screen: Select a Policy for Ext

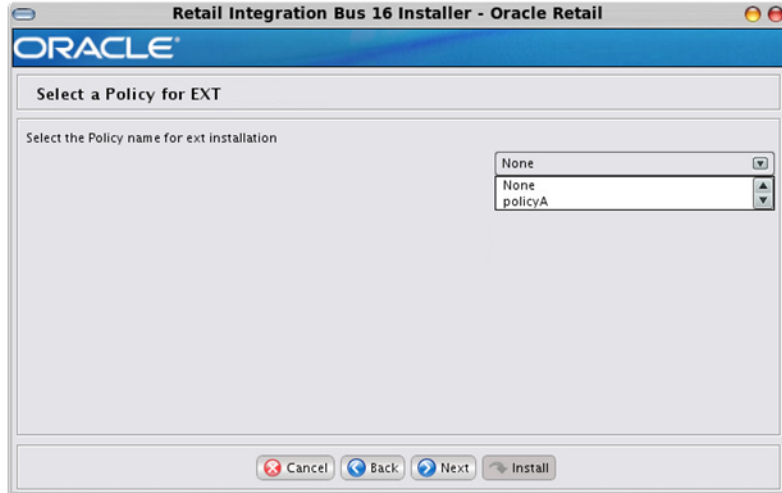

Field Title	Select the Policy name for OMS installation
Field Description	Policy that need to selected.
Notes	Appropriate policy need to be selected for non-secure / secure environment / message encryption. E.g: none/PolicyA

Screen: Ext Admin GUI Details

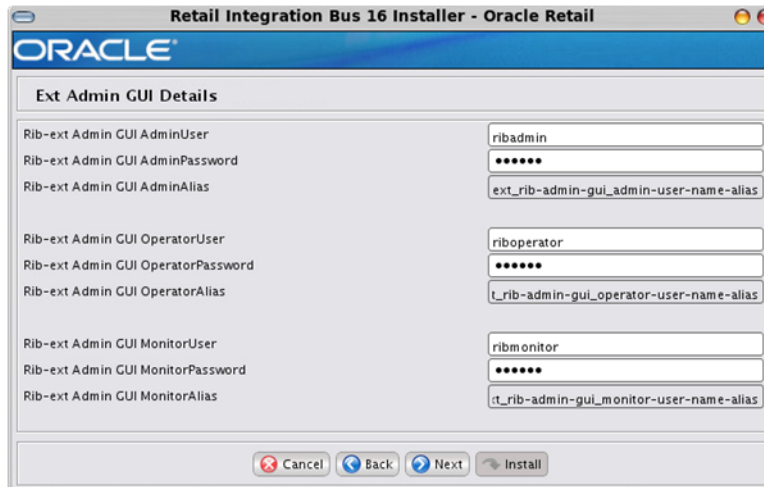

Field Title	<app> Admin GUI Admin User
Field Description	When logging in to the admin GUI for rib-<app>, use this user name.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> Admin GUI Admin Password
Field Description	The password for the <app> Admin GUI user.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Notes	For WLS 12.2.1, passwords must include at least one numeral.

Field Title	<app> Admin GUI Admin Alias
Field Description	The alias for the <app> Admin GUI user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	ext-admin-gui-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Field Title	<app> Admin GUI Operator User
Field Description	When logging in to the admin GUI for rib-<app>, use this user name. This user is in operator role, so will have limited access control in rib-admin-gui compared to adminrole.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Example	riboperator

Field Title	<app> Admin GUI Operator Password
Field Description	The password for the <app> Admin GUI operator user.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Notes	For WLS 12.2.1, passwords must include at least one numeral.

Field Title	<app> Admin GUI Operator Alias
Field Description	The alias for the <app> Admin GUI user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	rib-ext_rib-admin-gui_operator-user-name-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.


Field Title	<app> Admin GUI Monitor User
Field Description	When logging in to the admin GUI for rib-<app>, use this user name. This user is in monitor role, so will have limited access control in rib-admin-gui compared to adminrole and operatorrole.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> Admin GUI Monitor User
Example	ribmonitor

Field Title	<app> Admin GUI Monitor Password
Field Description	The password for the <app> Admin GUI operator user.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Notes	For WLS 12.2.1, passwords must include at least one numeral.

Field Title	<app> Admin GUI Monitor Alias
Field Description	The alias for the <app> Admin GUI user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	rib-ext_rib-admin-gui_monitor-user-name-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Screen: rib-ext Email Notification Details

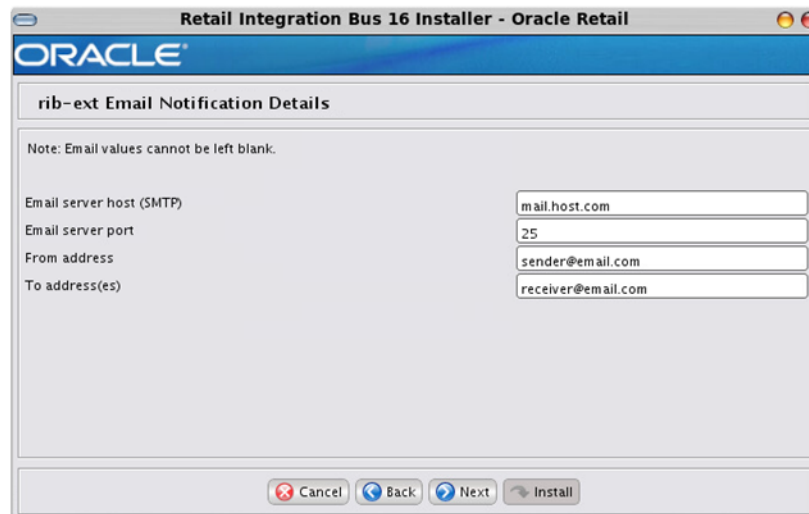

Field Title	Email server host (SMTP)
Field Description	The SMTP server that will be used to send notification emails from RIB.
Destination	rib-deployment-env-info.xml
Example	smtp.example.com

Field Title	Email server port
Field Description	The port for outgoing emails
Destination	rib-deployment-env-info.xml

Field Title	Email server port
Example	25


Field Title	From address
Field Description	The email address from which the rib-<app> email notifications will originate.
Destination	rib-deployment-env-info.xml
Example	rib@example.com

Field Title	To addresses
Field Description	List of recipients for rib-<app> email notifications.
Destination	rib-deployment-env-info.xml
Example	name1@example.com, name2@example.com


Screen: rib-rpm install type

rib-rpm can be deployed as soap-app or javaee-app . In case of hybrid cloud scenario in which app is on-premise and rib-<app> is on cloud communication between two will be over the internet (http/https protocol).

Pick the appropriate type from the options

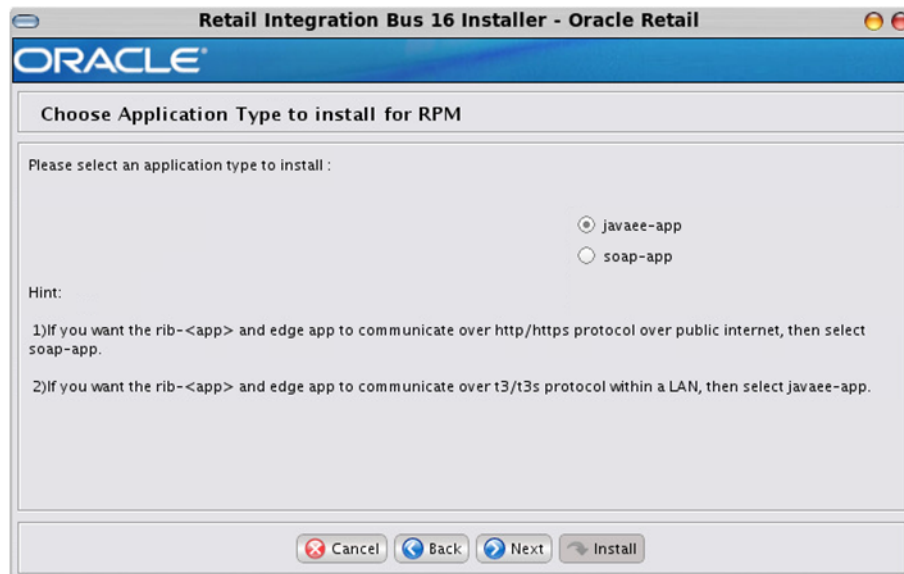

Screen: rib-rpm WLS Details

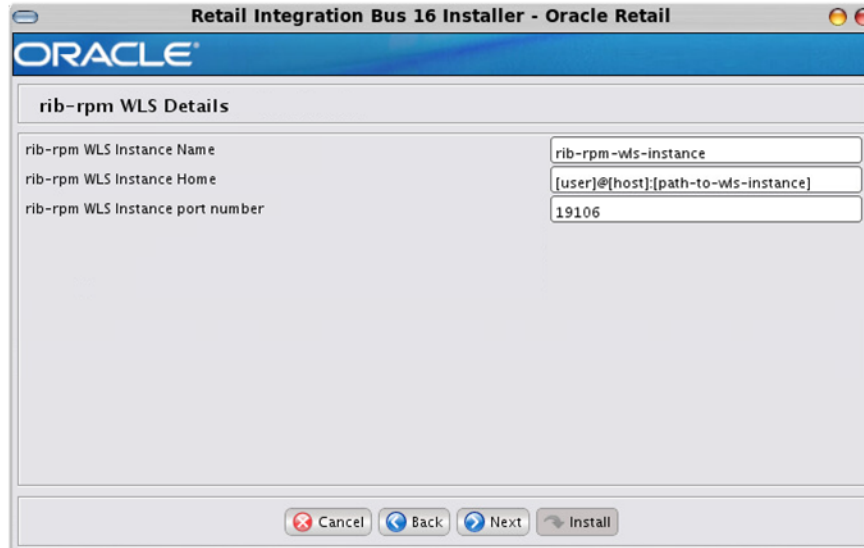


Field Title	rib-<app> WLS Instance Name
Field Description	The name of the WebLogic managed server instance where the rib-<app> will be deployed.
Destination	rib-deployment-env-info.xml
Example	Rib-rpm-wls-instance

Field Title	rib-<app> WLS Instance Home
Field Description	The format should be as follows: <user>@<host>:<WEBLOGIC_DOMAIN_HOME>/servers /<wls-instance> where: <user> is the user who owns the files in the ORACLE_HOME <host> is the name or IP address of the server where the App Server is installed <WEBLOGIC_DOMAIN_HOME> is the filesystem path to the WEBLOGIC_DOMAIN_HOME <wls-instance> is the WebLogic managed server instance name
Destination	rib-deployment-env-info.xml
Example	myuser@myhost://<WEBLOGIC_DOMAIN_ HOME>/servers/rib-rpm-wls-instance

Field Title	rib-<app> WLS Instance port number
Field Description	The port number used by this WebLogic managed server instance.
Destination	rib-deployment-env-info.xml
Example	7011

Screen: RPM Details

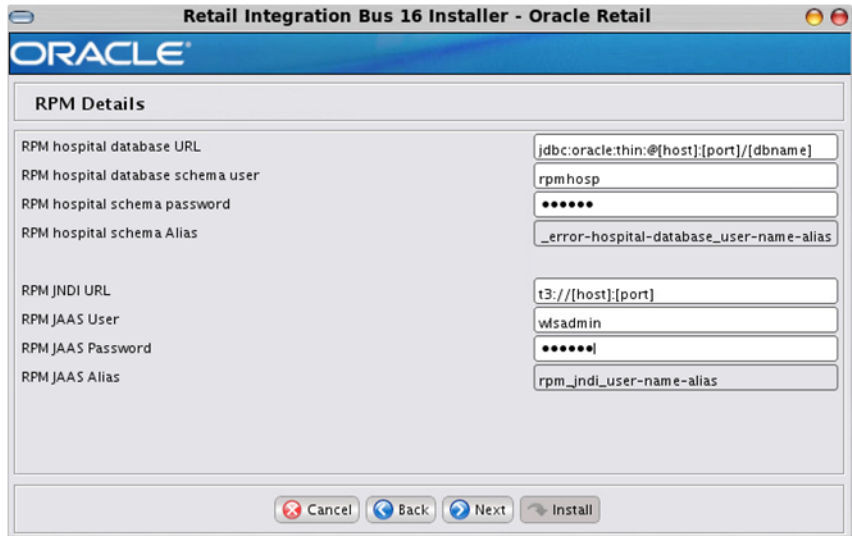

Field Title	<app> database URL
Field Description	JDBC URL for the database
Destination	rib-deployment-env-info.xml
Example	single instance thin client: jdbc:oracle:thin:@myhost:1521:mydb

Field Title	<app> database schema User
Field Description	Database user where the <app> database schema was installed
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> database schema password
Field Description	Password for the <app> database schema user
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> database schema alias
Field Description	Alias for the <app> database schema user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Field Title	<app> JNDI URL
Field Description	URL used by rib-<app> to connect to the <app> application.
Destination	rib-deployment-env-info.xml
Example	t3://myhost:7111

Field Title	<app> JAAS User
Field Description	When rib-<app> authenticates to the <app> JNDI naming service through the URL in the previous field, it will provide this user name. This should be the user name of the RPM application.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> JAAS Password
Field Description	The password for the <app> JAAS user. This should be the password of the RPM application.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> JAAS Alias
Field Description	The alias for the <app> JAAS user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	rpm-jaas-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Screen: RPM Admin GUI Details



Field Title	<app> Admin GUI Admin User
Field Description	When logging in to the admin GUI for rib-<app>, use this user name.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> Admin GUI Admin Password
Field Description	The password for the <app> Admin GUI user.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Notes	For WLS 12.2.1, passwords must include at least one numeral.

Field Title	<app> Admin GUI Admin Alias
Field Description	The alias for the <app> Admin GUI user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	rpm-admin-gui-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Field Title	<app> Admin GUI Operator User
Field Description	When logging in to the admin GUI for rib-<app>, use this user name. This user is in operator role, so will have limited access control in rib-admin-gui compared to adminrole.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Example	riboperator

Field Title	<app> Admin GUI Operator Password
Field Description	The password for the <app> Admin GUI operator user.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso.
Notes	For WLS 12.2.1, passwords must include at least one numeral.

Field Title	<app> Admin GUI Operator Alias
Field Description	The alias for the <app> Admin GUI user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	rib-rpm_rib-admin-gui_operator-user-name-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.


Field Title	<app> Admin GUI Monitor User
Field Description	When logging in to the admin GUI for rib-<app>, use this user name. This user is in monitor role, so will have limited access control in rib-admin-gui compared to adminrole and operatorrole.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> Admin GUI Monitor User
Example	ribmonitor

Field Title	<app> Admin GUI Monitor Password
Field Description	The password for the <app> Admin GUI operator user.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Notes	For WLS 12.2.1, passwords must include at least one numeral.

Field Title	<app> Admin GUI Monitor Alias
Field Description	The alias for the <app> Admin GUI user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	rib-rpm_rib-admin-gui_monitor-user-name-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Screen: rib-rpm Email Notification Details

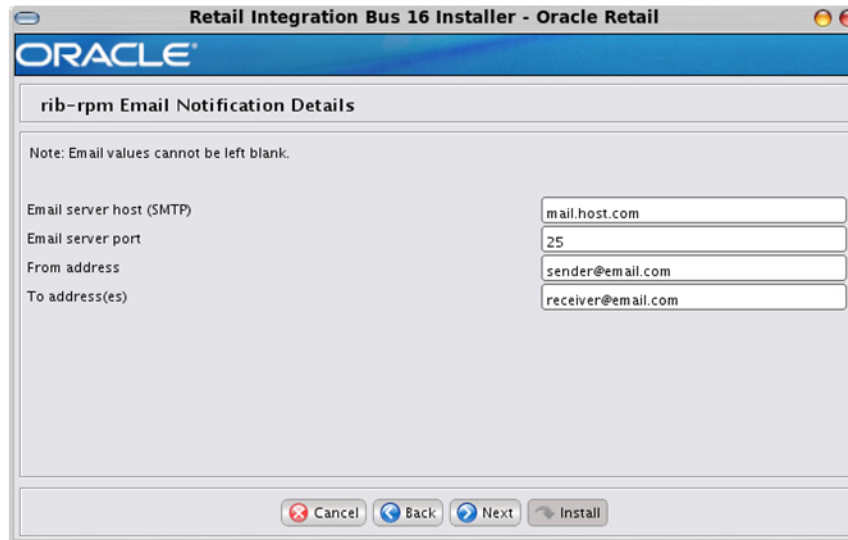

Field Title	Email server host (SMTP)
Field Description	The SMTP server that will be used to send notification emails from RIB.
Destination	rib-deployment-env-info.xml
Example	smtp.example.com

Field Title	Email server port
Field Description	The port for outgoing emails

Field Title	Email server port
Destination	rib-deployment-env-info.xml
Example	25

Field Title	From address
Field Description	The email address from which the rib-<app> email notifications will originate.
Destination	rib-deployment-env-info.xml
Example	rib@example.com

Field Title	To addresses
Field Description	List of recipients for rib-<app> email notifications.
Destination	rib-deployment-env-info.xml
Example	name1@example.com, name2@example.com


Screen: rib-rms WLS Details

Field Title	rib-<app> WLS Instance Name
Field Description	The name of the WebLogic managed server instance where the rib-<app> will be deployed.
Destination	rib-deployment-env-info.xml
Example	rib-rms-wls-instance

Field Title	rib-<app> WLS Instance Home
Field Description	The format should be as follows: <user>@<host>:<WEBLOGIC_DOMAIN_HOME>/servers /<wls-instance> where: <user> is the user who owns the files in the ORACLE_HOME <host> is the name or IP address of the server where the App Server is installed <WEBLOGIC_DOMAIN_HOME> is the filesystem path to the WEBLOGIC_DOMAIN_HOME <wls-instance> is the WebLogic managed server instance name
Destination	rib-deployment-env-info.xml
Example	myuser@myhost://<WEBLOGIC_DOMAIN_ HOME>/servers/rib-rms-wls-instance

Field Title	rib-<app> WLS Instance port number
Field Description	The port number used by this WebLogic managed server instance.
Destination	rib-deployment-env-info.xml
Example	7011

Screen: RMS Datasources

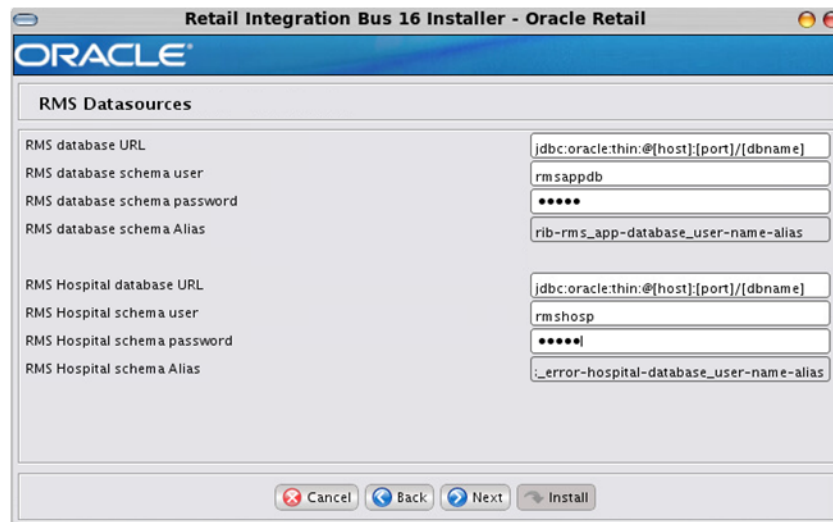


Field Title	<app> database URL
Field Description	JDBC URL for the database
Destination	rib-deployment-env-info.xml
Example	single instance thin client: jdbc:oracle:thin:@myhost:1521:mydb

Field Title	<app> database schema User
Field Description	Database user where the <app> database schema was installed
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> database schema password
Field Description	Password for the <app> database schema user
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> database schema alias
Field Description	Alias for the <app> database schema user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Screen: RMS Admin GUI Details

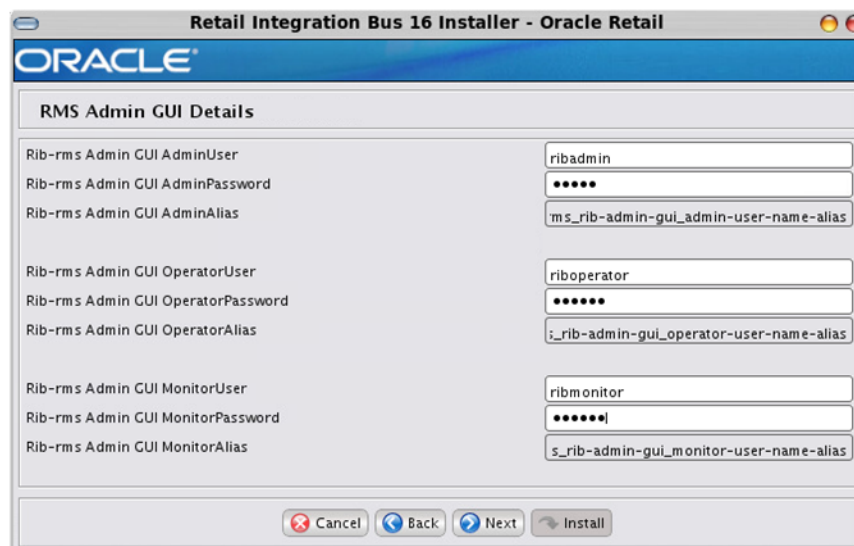

Field Title	<app> Admin GUI Admin User
Field Description	When logging in to the admin GUI for rib-<app>, use this user name.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> Admin GUI Admin Password
Field Description	The password for the <app> Admin GUI user.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Notes	For WLS 12.2.1, passwords must include at least one numeral.

Field Title	<app> Admin GUI Admin Alias
Field Description	The alias for the <app> Admin GUI user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	rms-admin-gui-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Field Title	<app> Admin GUI Operator User
Field Description	When logging in to the admin GUI for rib-<app>, use this user name. This user is in operator role, so will have limited access control in rib-admin-gui compared to adminrole.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Example	riboperator

Field Title	<app> Admin GUI Operator Password
Field Description	The password for the <app> Admin GUI operator user.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Notes	For WLS 12.2.1, passwords must include at least one numeral.

Field Title	<app> Admin GUI Operator Alias
Field Description	The alias for the <app> Admin GUI user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	rib-rms_rib-admin-gui_operator-user-name-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.


Field Title	<app> Admin GUI Monitor User
Field Description	When logging in to the admin GUI for rib-<app>, use this user name. This user is in monitor role, so will have limited access control in rib-admin-gui compared to adminrole and operatorrole.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Example	ribmonitor

Field Title	<app> Admin GUI Monitor Password
Field Description	The password for the <app> Admin GUI operator user.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> Admin GUI Monitor Password
Notes	For WLS 12.2.1, passwords must include at least one numeral.

Field Title	<app> Admin GUI Monitor Alias
Field Description	The alias for the <app> Admin GUI user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	rib-rms_rib-admin-gui_monitor-user-name-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Screen: rib-rms Email Notification Details

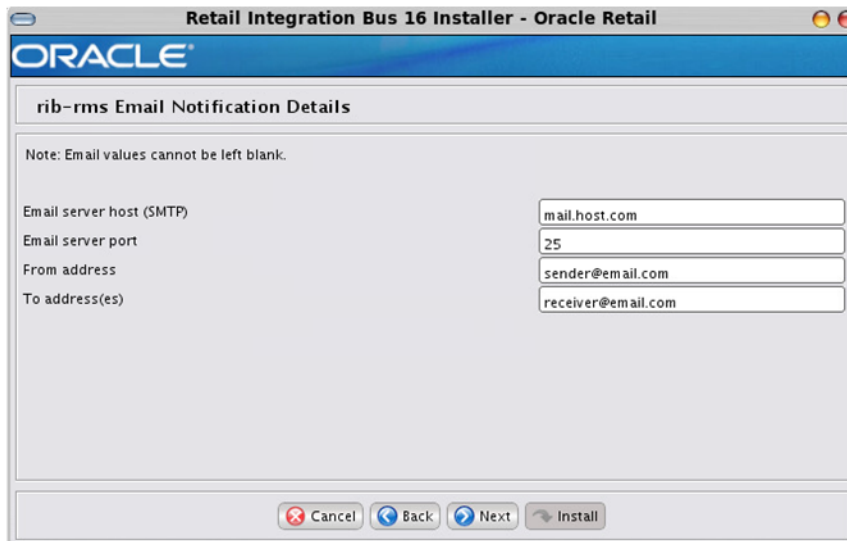

Field Title	Email server host (SMTP)
Field Description	The SMTP server that will be used to send notification emails from RIB.
Destination	rib-deployment-env-info.xml
Example	smtp.example.com

Field Title	Email server port
Field Description	The port for outgoing emails
Destination	rib-deployment-env-info.xml
Example	25

Field Title	From address
Field Description	The email address from which the rib-<app> email notifications will originate.
Destination	rib-deployment-env-info.xml
Example	rib@example.com

Field Title	To addresses
Field Description	List of recipients for rib-<app> email notifications.
Destination	rib-deployment-env-info.xml
Example	name1@example.com, name2@example.com

Screen: rib-tafr WLS Details

The screenshot shows a window titled "Retail Integration Bus 16 Installer - Oracle Retail". Inside, there is a section titled "rib-tafr WLS Details". This section contains three input fields:

- rib-tafr WLS Instance Name: rib-tafr-wls-instance
- rib-tafr WLS Instance Home: [user]@[host]:[path-to-wls-instance]
- rib-tafr WLS Instance port number: 19108


At the bottom of the window, there are four buttons: "Cancel", "Back", "Next", and "Install".

Field Title	rib-<app> WLS Instance Name
Field Description	The name of the WebLogic managed server instance where the rib-<app> will be deployed.
Destination	rib-deployment-env-info.xml
Example	rib-oms-wls-instance

Field Title	rib-<app> WLS Instance Home
Field Description	The format should be as follows: <user>@<host>:<WEBLOGIC_DOMAIN_HOME>/servers /<wls-instance> where: <user> is the user who owns the files in the ORACLE_HOME <host> is the name or IP address of the server where the App Server is installed <WEBLOGIC_DOMAIN_HOME> is the filesystem path to the WEBLOGIC_DOMAIN_HOME <wls-instance> is the WebLogic managed server instance name
Destination	rib-deployment-env-info.xml
Example	myuser@myhost://<WEBLOGIC_DOMAIN_HOME>/servers/rib-oms-wls-instance

Field Title	rib-<app> WLS Instance port number
Field Description	The port number used by this WebLogic managed server instance.
Destination	rib-deployment-env-info.xml
Example	7011

Screen: TAFR Datasources

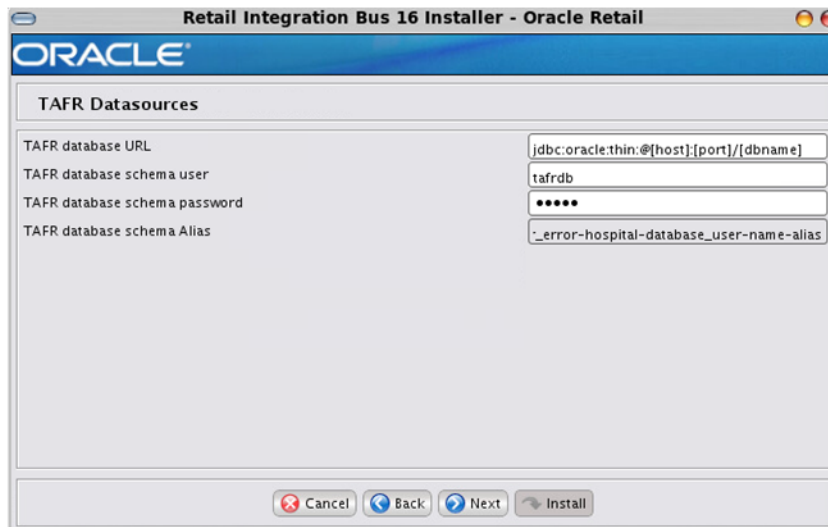

Field Title	<app> database URL
Field Description	JDBC URL for the database
Destination	rib-deployment-env-info.xml
Example	single instance thin client: jdbc:oracle:thin:@myhost:1521:mydb

Field Title	<app> database schema User
Field Description	Database user where the <app> database schema was installed
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> database schema password
Field Description	Password for the <app> database schema user
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> database schema alias
Field Description	Alias for the <app> database schema user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Screen: TAFR Admin GUI Details



Field Title	<app> Admin GUI Admin User
Field Description	When logging in to the admin GUI for rib-<app>, use this user name.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> Admin GUI Admin Password
Field Description	The password for the <app> Admin GUI user.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Notes	For WLS 12.2.1, passwords must include at least one numeral.

Field Title	<app> Admin GUI Admin Alias
Field Description	The alias for the <app> Admin GUI user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	tafr-admin-gui-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Field Title	<app> Admin GUI Operator User
Field Description	When logging in to the admin GUI for rib-<app>, use this user name. This user is in operator role, so will have limited access control in rib-admin-gui compared to adminrole.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Example	riboperator

Field Title	<app> Admin GUI Operator Password
Field Description	The password for the <app> Admin GUI operator user.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Notes	For WLS 12.2.1, passwords must include at least one numeral.

Field Title	<app> Admin GUI Operator Alias
Field Description	The alias for the <app> Admin GUI user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	rib-tafr_rib-admin-gui_operator-user-name-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.


Field Title	<app> Admin GUI Monitor User
Field Description	When logging in to the admin GUI for rib-<app>, use this user name. This user is in monitor role, so will have limited access control in rib-admin-gui compared to adminrole and operatorrole.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Example	ribmonitor

Field Title	<app> Admin GUI Monitor Password
Field Description	The password for the <app> Admin GUI operator user.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> Admin GUI Monitor Password
Notes	For WLS 12.2.1, passwords must include at least one numeral.

Field Title	<app> Admin GUI Monitor Alias
Field Description	The alias for the <app> Admin GUI user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	rib-tafr_rib-admin-gui_monitor-user-name-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Screen: rib-tafr Email Notification Details

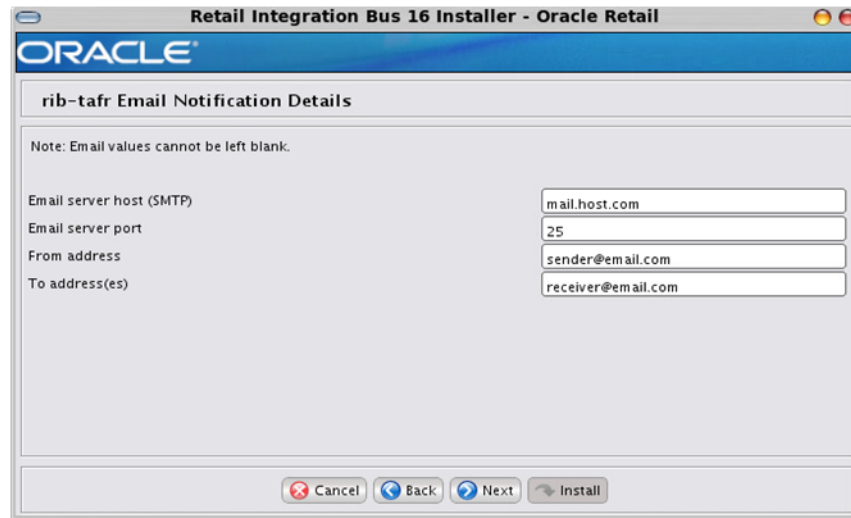

Field Title	Email server host (SMTP)
Field Description	The SMTP server that will be used to send notification emails from RIB.
Destination	rib-deployment-env-info.xml
Example	smtp.example.com

Field Title	Email server port
Field Description	The port for outgoing emails
Destination	rib-deployment-env-info.xml
Example	25

Field Title	From address
Field Description	The email address from which the rib-<app> email notifications will originate.


Field Title	From address
Destination	rib-deployment-env-info.xml
Example	rib@example.com

Field Title	To addresses
Field Description	List of recipients for rib-<app> email notifications.
Destination	rib-deployment-env-info.xml
Example	name1@example.com, name2@example.com


Screen: rib-aip install type

rib-aip can be deployed as soap-app or javaee-app . In case of hybrid cloud scenario in which app is on-premise and rib-<app> is on cloud communication between two will be over the internet (http/https protocol).

Pick the appropriate type from the options.

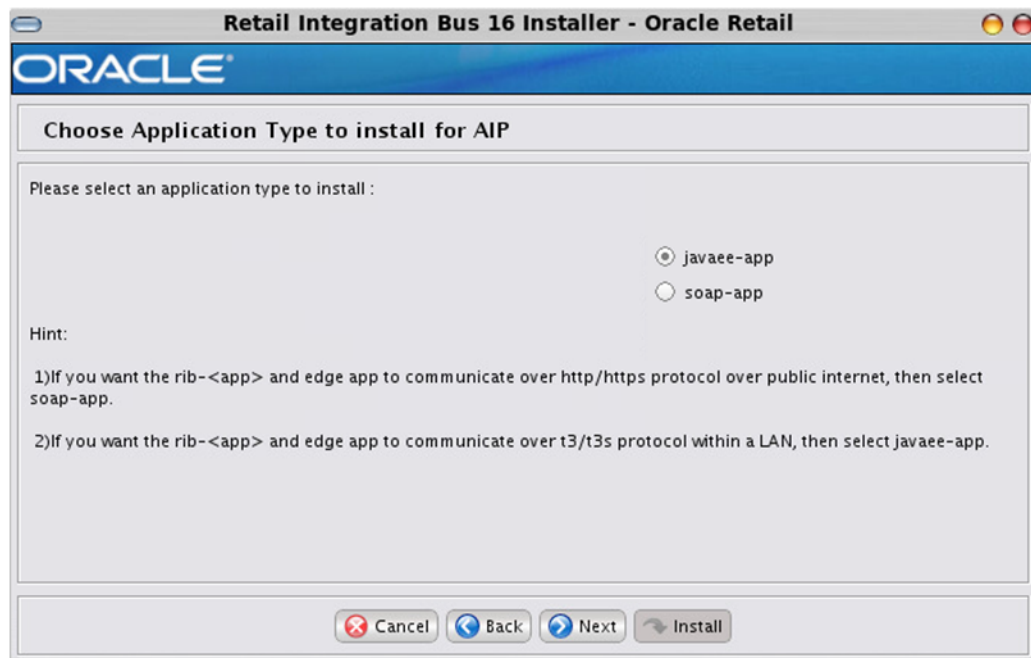

Screen: rib-aip WLS Details

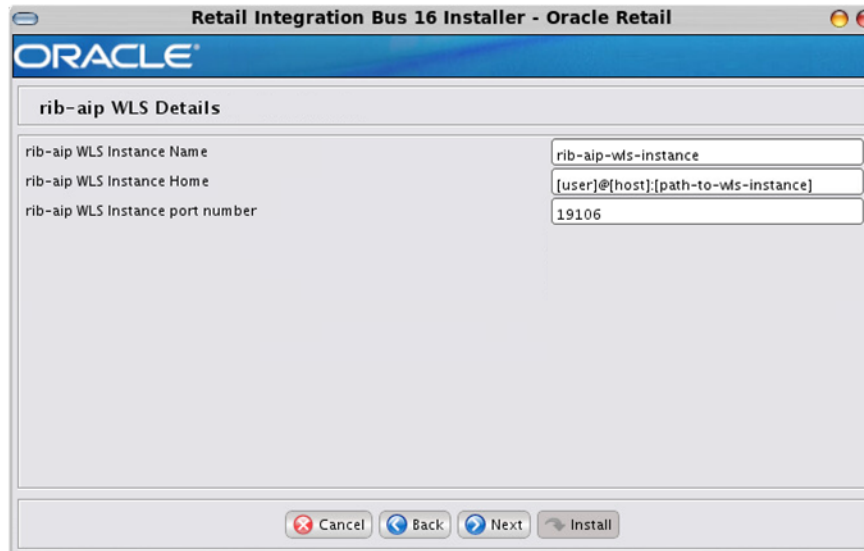


Field Title	rib-<app> WLS Instance Name
Field Description	The name of the WebLogic managed server instance where the rib-<app> will be deployed.
Destination	rib-deployment-env-info.xml
Example	rib-aip-wls-instance

Field Title	rib-<app> WLS Instance Home
Field Description	<p>The format should be as follows:</p> <pre><user>@<host>:<WEBLOGIC_DOMAIN_HOME>/servers/<wls-instance></pre> <p>where:</p> <ul style="list-style-type: none"> <user> is the user who owns the files in the ORACLE_HOME <host> is the name or IP address of the server where the App Server is installed <WEBLOGIC_DOMAIN_HOME> is the filesystem path to the WEBLOGIC_DOMAIN_HOME <wls-instance> is the WebLogic managed server instance name
Destination	rib-deployment-env-info.xml
Example	myuser@myhost://<WEBLOGIC_DOMAIN_HOME>/servers/rib-aip-wls-instance

Field Title	rib-<app> WLS Instance port number
Field Description	The port number used by this WebLogic managed server instance.
Destination	rib-deployment-env-info.xml
Example	7011

Screen: AIP Details

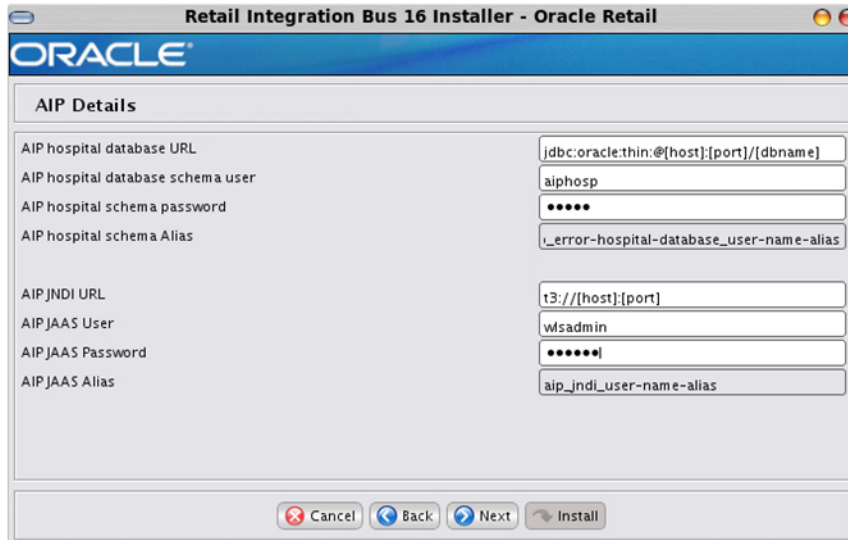

Field Title	<app> database URL
Field Description	JDBC URL for the database
Destination	rib-deployment-env-info.xml
Example	single instance thin client: jdbc:oracle:thin:@myhost:1521:mydb

Field Title	<app> database schema password
Field Description	Password for the <app> database schema user
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> database schema User
Field Description	Database user where the <app> database schema was installed
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> database schema alias
Field Description	Alias for the <app> database schema user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.


Field Title	<app> JNDI URL
Field Description	URL used by rib-<app> to connect to the <app> application.
Destination	rib-deployment-env-info.xml
Example	t3://myhost:7111

Field Title	<app> JAAS User
Field Description	When rib-<app> authenticates to the <app> JNDI naming service through the URL in the previous field, it will provide this user name. This should be the user name of the AIP application.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> JAAS Password
Field Description	The password for the <app> JAAS user. This should be the password of the AIP application.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> JAAS Alias
Field Description	The alias for the <app> JAAS user stored in the wallet file cwallet.sso.
Destination	<rib-deployment-env-info.xml
Example	aip-jaas-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Screen: AIP Admin GUI Details

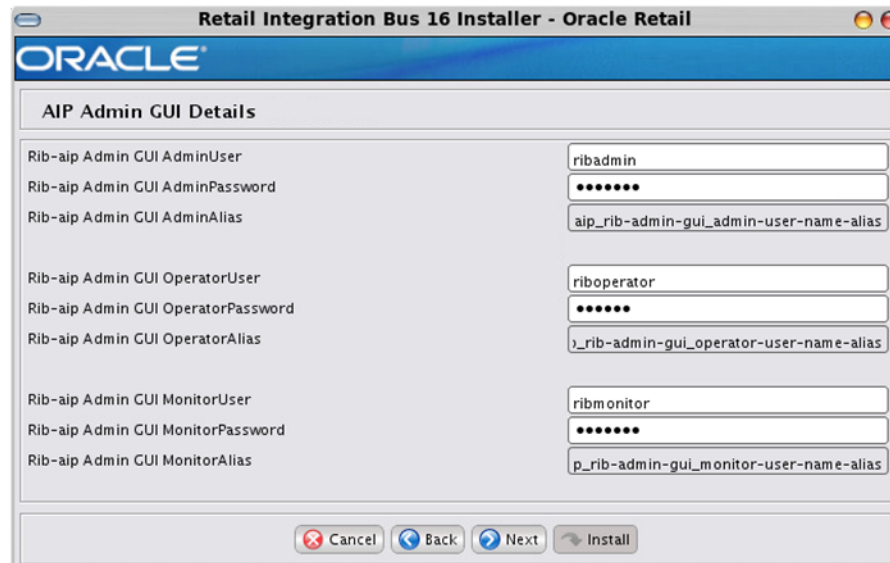

Field Title	<app> Admin GUI Admin User
Field Description	When logging in to the admin GUI for rib-<app>, use this user name.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> Admin GUI Admin Password
Field Description	The password for the <app> Admin GUI user.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Notes	For WLS 12.2.1, passwords must include at least one numeral.

Field Title	<app> Admin GUI Admin Alias
Field Description	The alias for the <app> Admin GUI user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	aip-admin-gui-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Field Title	<app> Admin GUI Operator User
Field Description	When logging in to the admin GUI for rib-<app>, use this user name. This user is in operator role, so will have limited access control in rib-admin-gui compared to adminrole.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Example	riboperator

Field Title	<app> Admin GUI Operator Password
Field Description	The password for the <app> Admin GUI operator user.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Notes	For WLS 12.2.1, passwords must include at least one numeral.

Field Title	<app> Admin GUI Operator Alias
Field Description	The alias for the <app> Admin GUI user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	rib-aip_rib-admin-gui_operator-user-name-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Field Title	<app> Admin GUI Monitor User
Field Description	When logging in to the admin GUI for rib-<app>, use this user name. This user is in monitor role, so will have limited access control in rib-admin-gui compared to adminrole and operatorrole.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> Admin GUI Monitor User
Example	ribmonitor

Field Title	<app> Admin GUI Monitor Password
Field Description	The password for the <app> Admin GUI operator user.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Notes	For WLS 12.2.1, passwords must include at least one numeral.

Field Title	<app> Admin GUI Monitor Alias
Field Description	The alias for the <app> Admin GUI user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	rib-aip_rib-admin-gui_monitor-user-name-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Screen: rib-aip Email Notification Details



Field Title	Email server host (SMTP)
Field Description	The SMTP server that will be used to send notification emails from RIB.
Destination	rib-deployment-env-info.xml
Example	smtp.example.com


Field Title	Email server port
Field Description	The port for outgoing emails

Field Title	Email server port
Destination	rib-deployment-env-info.xml
Example	25

Field Title	From address
Field Description	The email address from which the rib-<app> email notifications will originate.
Destination	rib-deployment-env-info.xml
Example	rib@example.com

Field Title	To addresses
Field Description	List of recipients for rib-<app> email notifications.
Destination	rib-deployment-env-info.xml
Example	name1@example.com, name2@example.com

Screen: rib-func-artifacts WLS Details

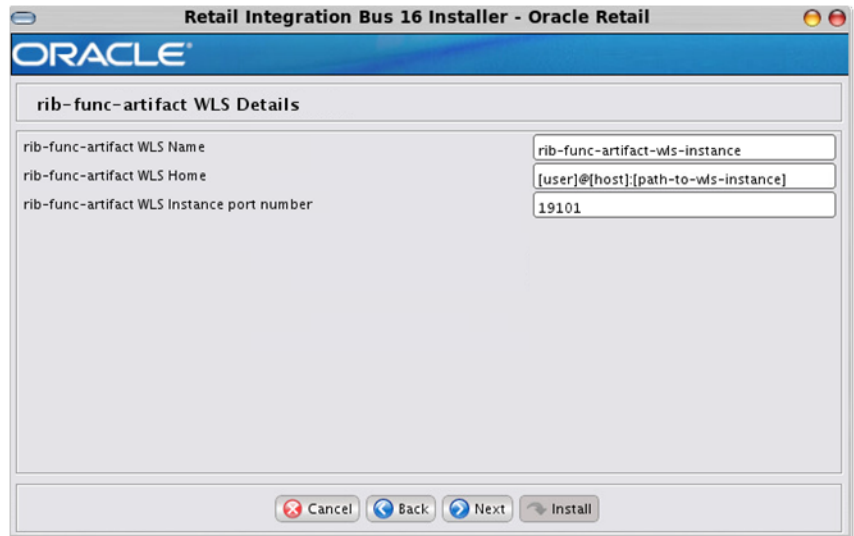


Field Title	rib-<app> WLS Instance Name
Field Description	The name of the WebLogic managed server instance where the rib-<app> will be deployed.
Destination	rib-deployment-env-info.xml
Example	rib-func-wls-instance

Field Title	rib-<app> WLS Instance Home
Field Description	The format should be as follows: <user>@<host>:<WEBLOGIC_DOMAIN_HOME>/servers /<wls-instance> where: <user> is the user who owns the files in the ORACLE_HOME <host> is the name or IP address of the server where the App Server is installed <WEBLOGIC_DOMAIN_HOME> is the filesystem path to the WEBLOGIC_DOMAIN_HOME <wls-instance> is the WebLogic managed server instance name
Destination	rib-deployment-env-info.xml
Example	myuser@myhost://<WEBLOGIC_DOMAIN_ HOME>/servers/rib-func-wls-instance

Field Title	rib-<app> WLS Instance port number
Field Description	The port number used by this WebLogic managed server instance.
Destination	rib-deployment-env-info.xml
Example	7011

Screen: rib-func-artifact Web Application Details

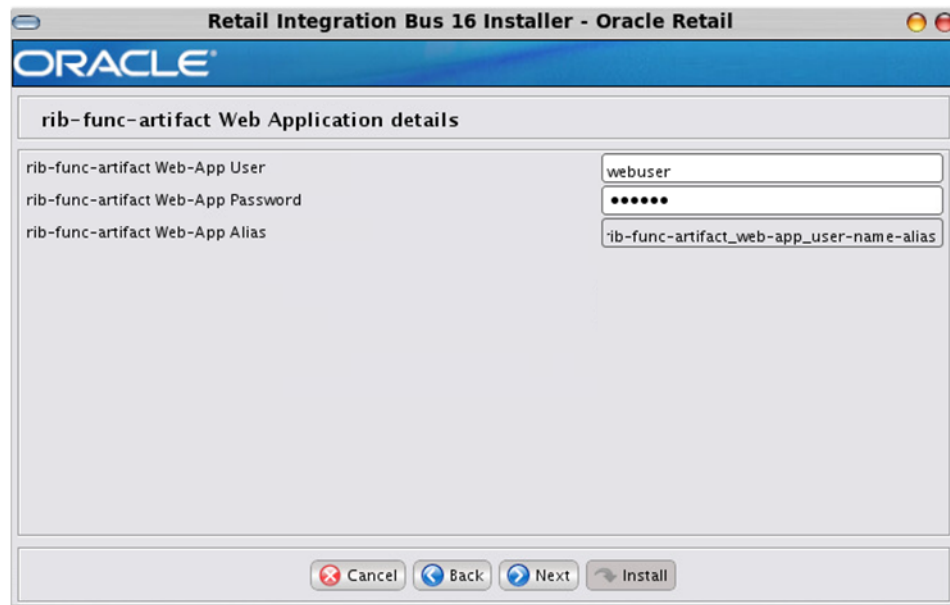

Field Title	rib-func-artifact Web-App User
Field Description	When logging in to the web application for rib-func-artifact, use this user name.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso


Field Title	rib-func-artifact Web-App Password
Field Description	The password for the rib-func-artifact Web-App user.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Notes	For WLS 12.2.1, passwords must include at least one numeral.

Field Title	rib-func-artifact Web-App Alias
Field Description	The alias for the rib-func-artifact web-app user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	func-artifact_web-app_user-name-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.


Screen: rib-rwms install type

rib-rwms can be deployed as soap-app or plsql-app . In case of hybrid cloud scenario in which app is on-premise and rib-<app> is on cloud communication between two will be over the internet (http/https protocol).

Pick the appropriate type from the options.

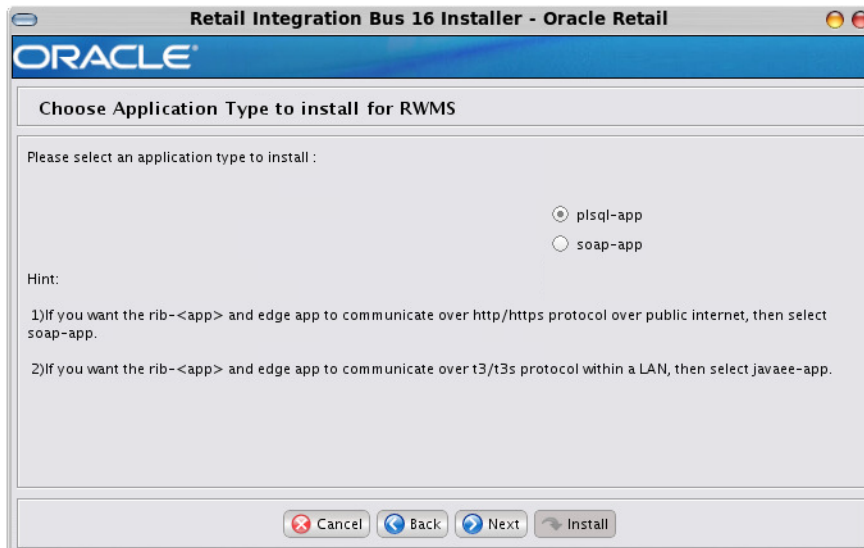

Screen: rib-rwms WLS Details

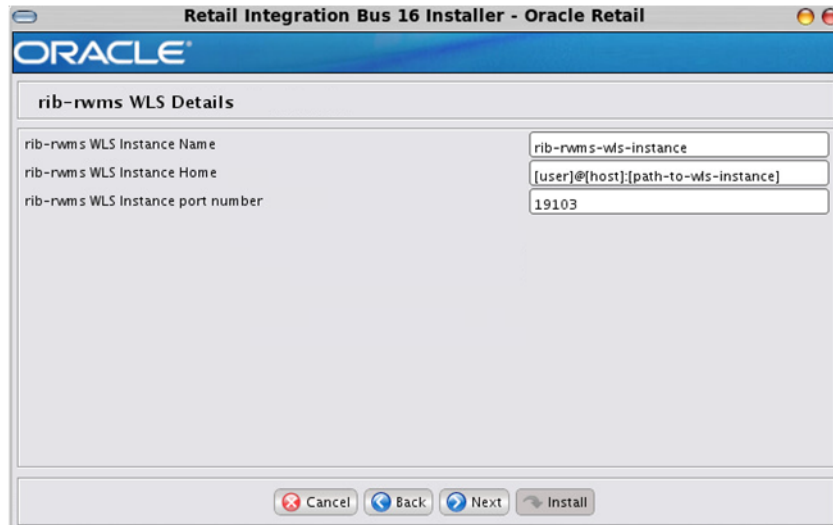


Field Title	rib-<app> WLS Instance Name
Field Description	The name of the WebLogic managed server instance where the rib-<app> will be deployed.
Destination	rib-deployment-env-info.xml
Example	rib-rwms-wls-instance

Field Title	rib-<app> WLS Instance Home
Field Description	The format should be as follows: <user>@<host>:<WEBLOGIC_DOMAIN_HOME>/servers /<wls-instance> where: <user> is the user who owns the files in the ORACLE_HOME <host> is the name or IP address of the server where the App Server is installed <WEBLOGIC_DOMAIN_HOME> is the filesystem path to the WEBLOGIC_DOMAIN_HOME <wls-instance> is the WebLogic managed server instance name
Destination	rib-deployment-env-info.xml
Example	myuser@myhost://<WEBLOGIC_DOMAIN_ HOME>/servers/rib-rwms-wls-instance

Field Title	rib-<app> WLS Instance port number
Field Description	The port number used by this WebLogic managed server instance.
Destination	rib-deployment-env-info.xml
Example	7011

Screen: RWMS Datasources

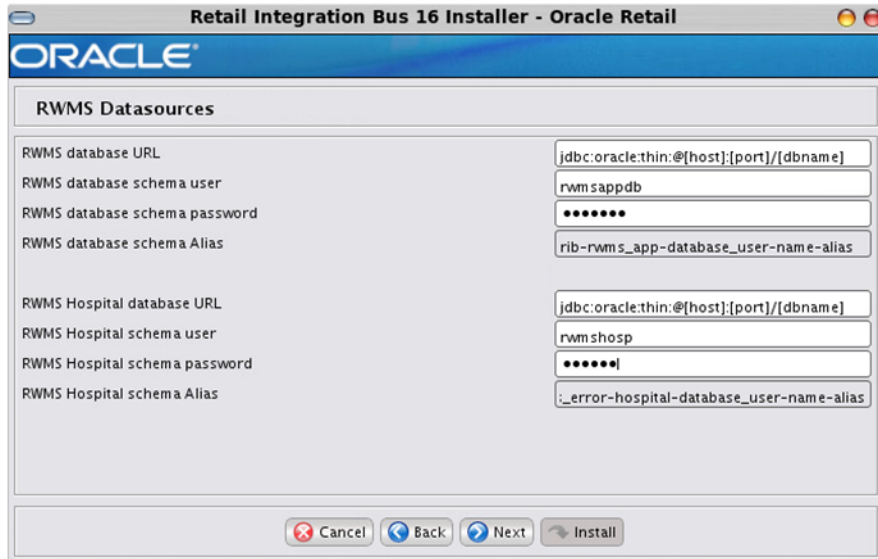


Field Title	<app> database URL
Field Description	JDBC URL for the database
Destination	rib-deployment-env-info.xml
Example	single instance thin client: jdbc:oracle:thin:@myhost:1521:mydb

Field Title	<app> database schema User
Field Description	Database user where the <app> database schema was installed
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> database schema password
Field Description	Password for the <app> database schema user
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> database schema alias
Field Description	Alias for the <app> database schema user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Screen: RWMS Admin GUI Details

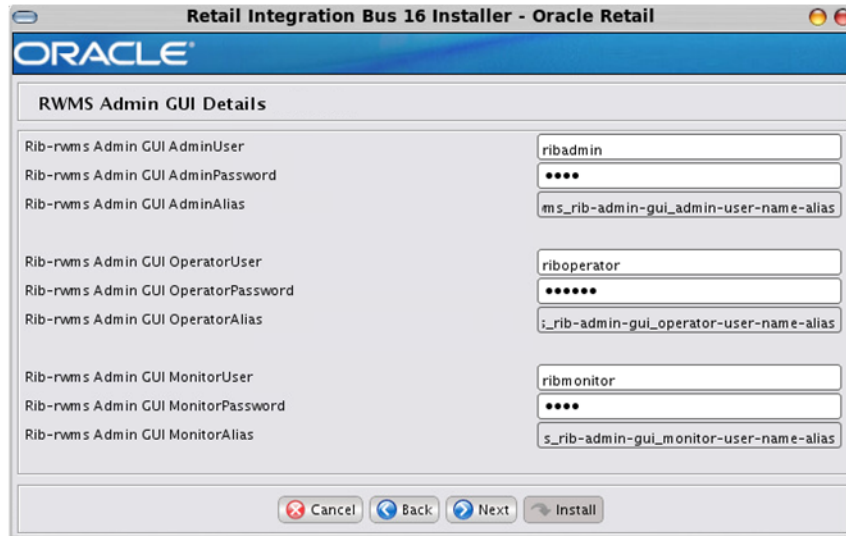

Field Title	<app> Admin GUI Admin User
Field Description	When logging in to the admin GUI for rib-<app>, use this user name.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> Admin GUI Admin Password
Field Description	The password for the <app> Admin GUI user.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Notes	For WLS 12.2.1 passwords must include at least one numeral.

Field Title	<app> Admin GUI Admin Alias
Field Description	The alias for the <app> Admin GUI user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	rwms-admin-gui-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Field Title	<app> Admin GUI Operator User
Field Description	When logging in to the admin GUI for rib-<app>, use this user name. This user is in operator role, so will have limited access control in rib-admin-gui compared to adminrole.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Example	riboperator

Field Title	<app> Admin GUI Operator Password
Field Description	The password for the <app> Admin GUI operator user.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Notes	For WLS 12.2.1, passwords must include at least one numeral.


Field Title	<app> Admin GUI Operator Alias
Field Description	The alias for the <app> Admin GUI user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	rib-rwms_rib-admin-gui_operator-user-name-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Field Title	<app> Admin GUI Monitor User
Field Description	When logging in to the admin GUI for rib-<app>, use this user name. This user is in monitor role, so will have limited access control in rib-admin-gui compared to adminrole and operatorrole.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Example	ribmonitor

Field Title	<app> Admin GUI Monitor Password
Field Description	The password for the <app> Admin GUI operator user.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Notes	For WLS 12.2.1, passwords must include at least one numeral.

Field Title	<app> Admin GUI Monitor Alias
Field Description	The alias for the <app> Admin GUI user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	rib-rwms_rib-admin-gui_monitor-user-name-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Screen: rib-rwms Email Notification Details

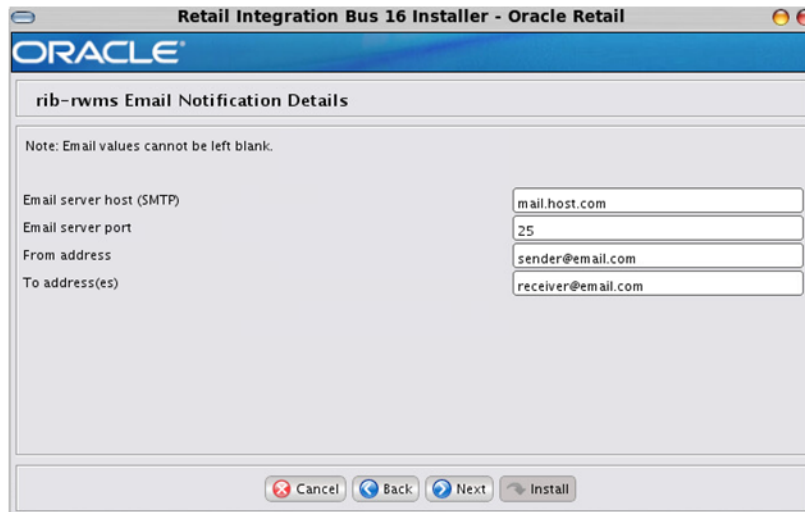

Field Title	Email server host (SMTP)
Field Description	The SMTP server that will be used to send notification emails from RIB.
Destination	rib-deployment-env-info.xml
Example	smtp.example.com

Field Title	Email server port
Field Description	The port for outgoing emails
Destination	rib-deployment-env-info.xml
Example	25


Field Title	From Address
Field Description	The email address from which the rib-<app> email notifications will originate.
Destination	rib-deployment-env-info.xml
Example	rib@example.com

Field Title	To Addresses
Field Description	List of recipients for rib-<app> email notifications.
Destination	rib-deployment-env-info.xml
Example	name1@example.com, name2@example.com


Screen: rib-rxm install type

rib-rxm can be deployed as soap-app or javaee-app . In case of hybrid cloud scenario in which app is on-premise and rib-<app> is on cloud communication between two will be over the internet (http/https protocol).

Pick the appropriate type from the options.

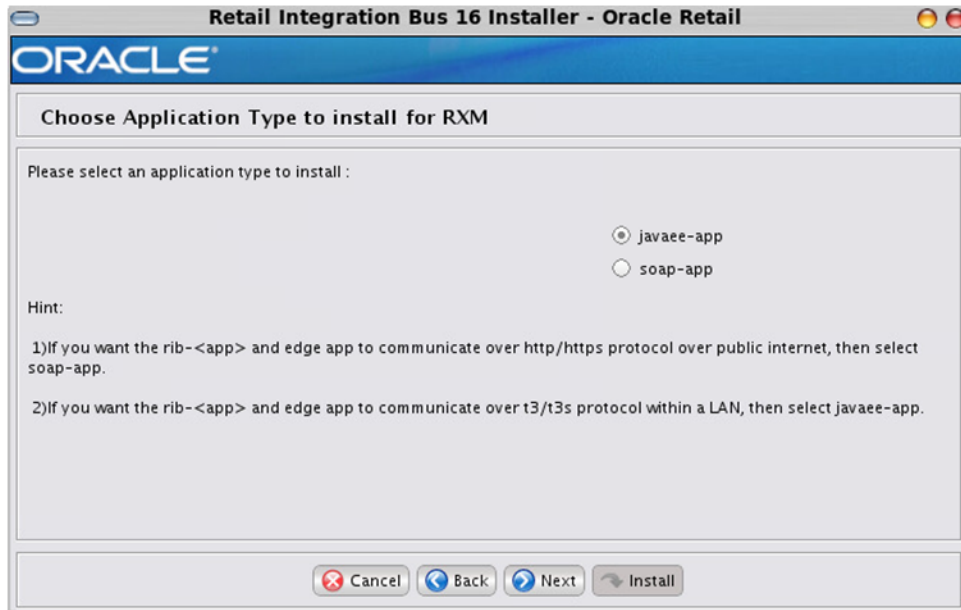

Screen: rib-rxm WLS Details

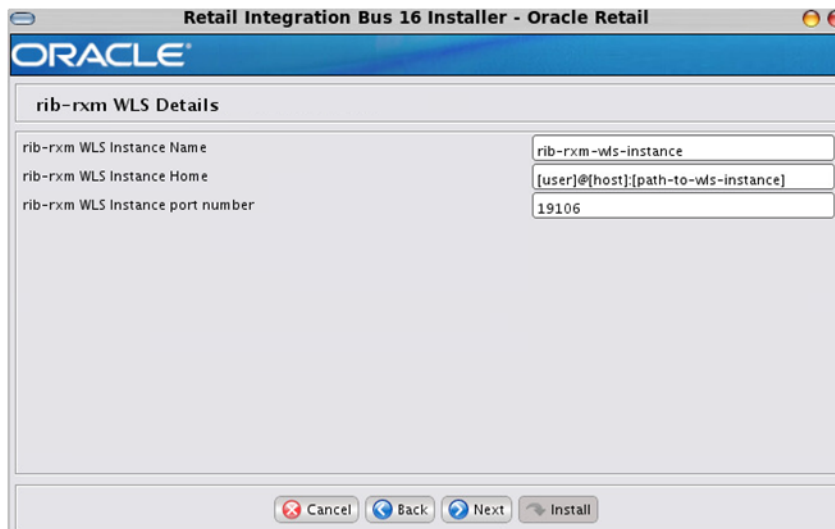


Field Title	rib-<app> WLS Instance Name
Field Description	The name of the WebLogic managed server instance where the rib-<app> will be deployed.
Destination	rib-deployment-env-info.xml
Example	rib-rxm-wls-instance

Field Title	rib-<app> WLS Instance Home
Field Description	The format should be as follows: <user>@<host>:<WEBLOGIC_DOMAIN_HOME>/servers/<wls-instance> where: <user> is the user who owns the files in the ORACLE_HOME <host> is the name or IP address of the server where the App Server is installed <WEBLOGIC_DOMAIN_HOME> is the filesystem path to the WEBLOGIC_DOMAIN_HOME <wls-instance> is the WebLogic managed server instance name
Destination	rib-deployment-env-info.xml
Example	myuser@myhost://<WEBLOGIC_DOMAIN_HOME>/servers/rib-rxm-wls-instance

Field Title	rib-<app> WLS Instance port number
Field Description	The port number used by this WebLogic managed server instance.
Destination	rib-deployment-env-info.xml
Example	7011

Screen: RXM Details

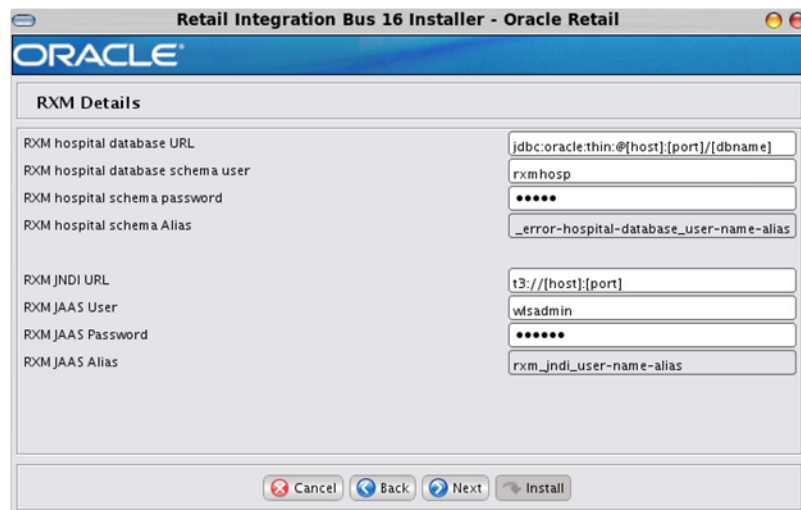

Field Title	<app> database URL
Field Description	JDBC URL for the database
Destination	rib-deployment-env-info.xml
Example	single instance thin client: jdbc:oracle:thin:@myhost:1521:mydb

Field Title	<app> database schema password
Field Description	Password for the <app> database schema user

Field Title	<app> database schema password
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> database schema User
Field Description	Database user where the <app> database schema was installed
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> database schema alias
Field Description	Alias for the <app> database schema user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Field Title	<app> JNDI URL
Field Description	URL used by rib-<app> to connect to the <app> application.
Destination	rib-deployment-env-info.xml
Example	t3://myhost:7111

Field Title	<app> JAAS User
Field Description	When rib-<app> authenticates to the <app> JNDI naming service through the URL in the previous field, it will provide this user name. This should be the user name of the RXM application.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> JAAS Password
Field Description	The password for the <app> JAAS user. This should be the password of the rxm application.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> JAAS Alias
Field Description	The alias for the <app> JAAS user stored in the wallet file cwallet.sso.
Destination	<rib-deployment-env-info.xml
Example	rxm-jaas-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Screen: RXM AdminGUI Details

Field Title	<app> Admin GUI Admin User
Field Description	When logging in to the admin GUI for rib-<app>, use this user name.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso

Field Title	<app> Admin GUI Admin Password
Field Description	The password for the <app> Admin GUI user.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Notes	For WLS 12.2.1, passwords must include at least one numeral.

Field Title	<app> Admin GUI Admin Alias
Field Description	The alias for the <app> Admin GUI user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	rxm-admin-gui-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Field Title	<app> Admin GUI Operator User
Field Description	When logging in to the admin GUI for rib-<app>, use this user name. This user is in operator role, so will have limited access control in rib-admin-gui compared to adminrole.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Example	riboperator

Field Title	<app> Admin GUI Operator Password
Field Description	The password for the <app> Admin GUI operator user.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Notes	For WLS 12.2.1, passwords must include at least one numeral.


Field Title	<app> Admin GUI Operator Alias
Field Description	The alias for the <app> Admin GUI user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	rib-rxm_rib-admin-gui_operator-user-name-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Field Title	<app> Admin GUI Monitor User
Field Description	When logging in to the admin GUI for rib-<app>, use this user name. This user is in monitor role, so will have limited access control in rib-admin-gui compared to adminrole and operatorrole.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Example	ribmonitor

Field Title	<app> Admin GUI Monitor Password
Field Description	The password for the <app> Admin GUI operator user.
Destination	<RIB_HOME>/deployment-home/conf/security/cwallet.sso
Notes	For WLS 12.2.1, passwords must include at least one numeral.

Field Title	<app> Admin GUI Monitor Alias
Field Description	The alias for the <app> Admin GUI user stored in the wallet file cwallet.sso.
Destination	rib-deployment-env-info.xml
Example	rib-rxm_rib-admin-gui_monitor-user-name-alias
Notes	This alias must be unique. Do not use the same value for any other alias fields in the installer. If the same alias is used, entries in the wallet can override each other and cause problems with the application.

Screen: rib-rxm Email Notification Details

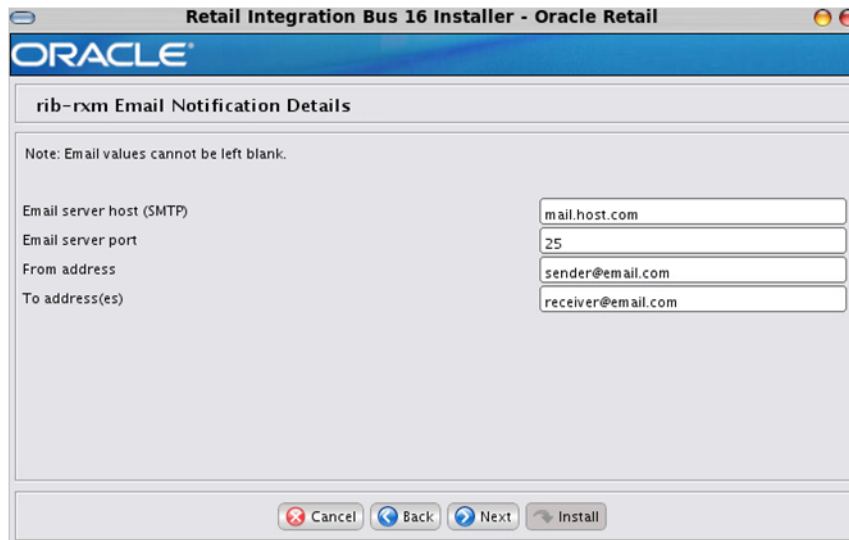

Field Title	Email server host (SMTP)
Field Description	The SMTP server that will be used to send notification emails from RIB.
Destination	rib-deployment-env-info.xml
Example	smtp.example.com

Field Title	Email server port
Field Description	The port for outgoing emails
Destination	rib-deployment-env-info.xml
Example	25

Field Title	From Address
Field Description	The email address from which the rib-<app> email notifications will originate.
Destination	rib-deployment-env-info.xml
Example	rib@example.com

Field Title	To Addresses
Field Description	List of recipients for rib-<app> email notifications.
Destination	rib-deployment-env-info.xml
Example	name1@example.com, name2@example.com



Appendix: RIB Installer Common Errors

This appendix provides some common errors encountered during installation to aid in troubleshooting.

Unreadable Buttons in the Installer

If you are unable to read the text within the installer buttons, it could mean that your `JAVA_HOME` is pointed to an older version of the JDK than is supported by the installer. Set `JAVA_HOME` to a 1.8.0_64 with latest security updates (64 bit for Linux and Solaris OS only) and run the installer again.

Warning: Could not Create System Preferences Directory

Symptom:

The following text appears in the installer Errors tab:

```
May 22, 2010 11:16:39 AM java.util.prefs.FileSystemPreferences$3 run
WARNING: Could not create system preferences directory. System preferences are
unusable.
May 22, 2010 11:17:09 AM java.util.prefs.FileSystemPreferences
checkLockFile0ErrorCode
WARNING: Could not lock System prefs. Unix error code -264946424.
```

Solution:

This is related to Java bug 4838770. The `/etc/.java/.systemPrefs` directory may not have been created on your system. See <http://bugs.sun.com> for details.

This is an issue with your installation of Java and does not affect the Oracle Retail product installation.

ConcurrentModificationException in Installer GUI

Symptom:

In GUI mode, the Errors tab shows the following error:

```
java.util.ConcurrentModificationException
.....at
  java.util.AbstractList$Itr.checkForComodification(AbstractList.java:448)
.....at java.util.AbstractList$Itr.next(AbstractList.java:419)
.....etc.
```

Solution:

You can ignore this error. It is related to third-party Java Swing code for rendering of the installer GUI and does not affect the retail product installation.

Warning: Could Not Find X Input Context

Symptom:

The following text appears in the console window during execution of the installer in GUI mode:

```
Couldn't find X Input Context
```

Solution:

This message is harmless and can be ignored.

Message: Problem Occurred during Parsing Input XML Files

Symptom:

The following text appears in the console window during execution of the installer:

```
ERROR oracle.retail.rib.compiler.Main - Problem occurred during parsing input xml files. Please check the log file(../.././rib-home/application-assembly-home/log) for more details.
```

```
.....
```

```
Caused by: ValidationException:
```

```
.....
```

Solution:

The rib-deployment-env-info.xml file is validated during the Assembly Phase using stricter criteria than is enforced by the installer input screens. If the validation fails, the installer will print an error message to help you determine the cause of the validation failure. It is recommended that you fix the rib-deployment-env-info.xml file manually, and then re-run the installer with the "Use existing rib-deployment-env-info.xml" option.

rib-app-builder Hangs if a User is Logged in to the Administration Console during Deployment

If the WebLogic server is installed in development mode, the rib-app-builder may "hang" if a user is already logged into the admin console. Click **Activate Changes** in the admin console to continue with rib-app-builder process every time it happens. To prevent this from occurring, use the option in the WebLogic admin console.

1. Click the **Preferences** link on the admin console.
2. Uncheck the Automatically Acquire Lock and Activate Changes check box.
3. Click **Release Configuration**.

The above process will enable only one user to make admin changes to the server. For making admin changes to the console, the user must explicitly acquire the lock, make changes, and release configuration.

Make sure the Release Configuration button in the admin console is disabled before starting to deploy rib apps. So even if you navigate to other screens while deploying RIB apps, the rib deployer will not hang.

Note: If the WebLogic server is installed in production mode, by default it acquires the lock before making any changes to the server. Therefore, the above steps need not be followed when deploying rib-apps to a WebLogic server running in production mode.

Appendix: RIB Installation Checklists

This appendix is intended as an aid in the installation of RIB. It is not intended to replace the detailed description of each of the process steps and prerequisites, but to act as a companion to those steps. For a successful installation, a methodical reading and understanding of each step of the *Oracle Retail Integration Bus Installation Guide* is strongly recommended.

RIB Installation Master Checklist

This checklist covers all of the sequential steps required to perform a full installation of the RIB, using either the GUI RIB Installer (strongly recommended) or a command line installation.

Task	Notes
Prepare the WebLogic servers for installation of the RIB Components	Prerequisite
Prepare the Oracle Database schemas that the RIB will use.	Prerequisite
Prepare the Oracle AQ JMS	Prerequisite
Verify the applications the RIB will be integrating to are configured appropriately.	In the documentation for each Oracle application, see the sections on integration with the RIB.
Information to gather for the installation	During the prerequisites steps there is information that should be note that will be used to configure the RIB during the installation process.
Install the RIB using one of these methods: <ul style="list-style-type: none"> ▪ Installation using the RIB Installer GUI ▪ Installation using the RIB App Builder Command Line Tools. 	It is strongly recommended that the Installation using the RIB Installer GUI method be used.
Verify Application URL settings match RIB installation.	RIB Functional Artifact URL JNDI URL

Task	Notes
Complete the setup of RDMT using the same information to gather for the installation.	During either of the installation methods, one of the manual steps will have extracted the rdmt tools to the appropriate directory.
Verify the RIB installation using the RDMT tools.	
Install RIHA	RIB Hospital maintenance tool
Install IGS	This step is optional and should be performed only if there is a requirement to do so. See "Integration Gateway Services" in the <i>Oracle Retail Integration Bus Implementation Guide</i> .

Prerequisite - Prepare WebLogic Server for RIB Components

Task	Notes
Install WebLogic Server 12.2.1	See the <i>Oracle Retail Integration Bus Release Notes</i> for the certifications. See the <i>Oracle Retail Integration Bus Implementation Guide</i> for deployment architectures.
<p>Create the RIB WebLogic managed server instances.</p> <p>Warning: Each rib-<app> application requires a separate WebLogic managed server instance that is not shared with any other application.</p> <p>Create the rib-<app>-wls-instance using WebLogic admin console GUI</p> <p>Log in to the WebLogic admin console GUI (<a href="http://<host>:<port>/console">http://<host>:<port>/console) as administrator</p> <p>On the left side menu, navigate to Environment > Servers</p> <p>Click New.</p> <p>Fill in the Name, Port, Listen address of the managed server instance to be create.</p> <p>Example:</p> <p>Server Name: rib-<app>-wls-instance</p> <p>Server Listen Address: ribhost</p> <p>Server Listen Port:19007</p>	<p>For information about creating and managing WebLogic managed server instances, see Oracle® Fusion Middleware Administrator's Guide 12.2.1</p> <p>Replace <app> with the actual value of the RIB application for the associated retail application. Acceptable values for <app> are "rms", "rwms", "tafr", "sim", "rpm", "rfm", "aip" and "oms." Port number must be a unique port.</p> <p>There are two RIB specific WebLogic instances that must be created regardless of the other application deployment choices.</p> <ul style="list-style-type: none"> ▪ rib-func-artifact-wls-instance. (It is recommended, but not required, that this naming convention be followed.) <p>These are the optional application instances depending on the deployment choices. It is recommended, but not required that this naming convention be followed:</p> <ul style="list-style-type: none"> ▪ rib-rms-server ▪ rib-tafr-server ▪ rib-rpm-server ▪ rib-sim-server ▪ rib-rwms-server ▪ rib-rfm-server ▪ rib-aip-server ▪ rib-oms-server ▪ rib-rxm-server
<p>Click Next. Click Finish.</p> <p>Make sure you see this instance listed under Servers.</p>	

Task	Notes
<p>Go to the configurations page of the server and select the host name in the Machine field.</p> <p>Click Save.</p> <p>Managed server instance creation is complete.</p>	
<p>Edit the script <code>\$DOMAIN_HOME/bin/startWebLogic.sh</code> to add the following attributes.</p> <pre>CLASSPATH=\$DOMAIN_HOME/servers/\$SERVER_NAME:\$CLASSPATH JAVA_OPTIONS="-Dweblogic.ejb.container.MDBMessageWaitTime=2 \${JAVA_OPTIONS}"</pre>	<p>Sample from startWebLogic:</p> <pre>echo "JAVA Memory arguments: \${MEM_ARGS}" echo "." echo "WLS Start Mode=\${WLS_DISPLAY_MODE}" echo "." JAVA_OPTIONS="-Dweblogic.ejb.container.MDBMessageWaitTime=2 \${JAVA_OPTIONS}" CLASSPATH=\$DOMAIN_HOME/servers/\$SERVER_NAME:\$CLASSPATH echo "CLASSPATH=\${CLASSPATH}" echo "." echo "PATH=\${PATH}" echo "." echo "*****" echo "* To start WebLogic Server, use a username and *" echo "* password assigned to an admin-level user. For *" echo "* server administration, use the WebLogic Server *" echo "* console at http://hostname:port/console *" echo "*****" "*****"</pre>

Task	Notes
	<p>Note:</p> <p>In the startWebLogic script, the above statements must be added before the WebLogic server is started. In other words, the statements must be before these lines:</p> <pre> if ["\${WLS_REDIRECT_LOG}" = ""] ; then echo "Starting WLS with line:" echo "\${JAVA_HOME}/bin/java -d64 \${JAVA_VM} \${MEM_ARGS} -Dweblogic.Name=\${SERVER_NAME} -Djava.security.policy=\${WL_ HOME}/server/lib/weblogic.policy \${JAVA_OPTIONS} \${PROXY_SETTINGS} \${SERVER_CLASS}" #echo "\${JAVA_HOME}/bin/java -d64 \${JAVA_VM} \${MEM_ARGS} -Dweblogic.Name=\${SERVER_NAME} -Djava.security.policy=\${WL_ HOME}/server/lib/weblogic.policy \${JAVA_OPTIONS} \${PROXY_SETTINGS} \${SERVER_CLASS}" \${JAVA_HOME}/bin/java \${JAVA_VM} \${MEM_ARGS} -Dweblogic.Name=\${SERVER_ NAME} -Djava.security.policy=\${WL_ HOME}/server/lib/weblogic.policy \${JAVA_OPTIONS} \${PROXY_SETTINGS} \${SERVER_CLASS} else echo "Redirecting output from WLS window to \${WLS_REDIRECT_LOG}" #\${JAVA_HOME}/bin/java -d64 \${JAVA_VM} \${MEM_ARGS} -Dweblogic.Name=\${SERVER_NAME} -Djava.security.policy=\${WL_ HOME}/server/lib/weblogic.policy \${JAVA_OPTIONS} \${PROXY_SETTINGS} \${SERVER_CLASS} > "\${WLS_ REDIRECT_LOG}" 2>&1 \${JAVA_HOME}/bin/java \${JAVA_VM} \${MEM_ ARGS} -Dweblogic.Name=\${SERVER_NAME} -Djava.security.policy=\${WL_ HOME}/server/lib/weblogic.policy \${JAVA_OPTIONS} \${PROXY_SETTINGS} \${SERVER_CLASS} > "\${WLS_ REDIRECT_LOG}" 2>&1 fi </pre>

Task	Notes
<p>Update \$WL_HOME/<wlsserver>/server/lib/weblogic.policy file with the information below.</p>	<p>Note: If copying the following text from this guide to UNIX, ensure that it is properly formatted in UNIX. Each line entry beginning with "permission" must terminate on the same line with a semicolon.</p> <p>Note: <WEBLOGIC_DOMAIN_HOME> in the below example is the full path of the Weblogic Domain, <managed_server> is the RIB managed server created and <context_root> correlates to the rib-app ears for all managed servers hosting rib-apps, except for rib-func-artifact-instance. See the example below.</p> <p>Note: The path tmp/_WL_user/rib-<app>.ear will not be available before the deployment.</p> <p>Example:</p> <pre>grant codeBase "file: <WEBLOGIC_DOMAIN_HOME>/servers/<managed_server>/tmp/_WL_user/<context_root>/-" { permission java.security.AllPermission; permission oracle.security.jps.service.credstore.CredentialAccessPermission "credstoressp.credstore", "read,write,update,delete"; permission oracle.security.jps.service.credstore.CredentialAccessPermission "credstoressp.credstore.*", "read,write,update,delete"; }; };</pre> <p>Note:Add the path to the patch jars. If any patches are installed into WLS (now or in the future) and this line is not included it could cause the RIB to fail. WLS_HOME refers to the location where Weblogic 12.2.1 has been installed.</p> <pre>grant codeBase "file:<<WLS_HOME>/patch_wls/patch_jars/-" { permission java.security.AllPermission; permission oracle.security.jps.service.credstore.CredentialAccessPermission "credstoressp.credstore", "read,write,update,delete"; permission oracle.security.jps.service.credstore.CredentialAccessPermission "credstoressp.credstore.*", "read,write,update,delete"; }; };</pre>

Task	Notes
<p>Start WebLogic managed server.</p> <p>Note: This procedure can be done through the command line or through the admin console. Both methods are included below.</p> <p>Start WebLogic managed server through the command line:</p> <p>Log in to the machine where WLS was installed with the operating system user that was used to install the WebLogic Application Server (WLS).</p> <p>Navigate to the DOMAIN_HOME/bin</p> <p>Example: \$cd product/16.0.21_RIB/WLS/user_projects/domains/base_domain/bin</p> <p>run startManagedWebLogic script with instance name as a parameter</p> <p>Example: sh startManagedWebLogic.sh rib-rms-wls-instance</p> <p>Starting WebLogic managed server through admin console.</p> <p>To be able to properly start RIB managed server instance, the properties below need to be modified in \$WL_HOME/wlserver/common/nodemanager/nodemanager.properties file:</p> <p>Change the value of StartScriptEnabled property to true.</p> <p>Change the value of StartScriptName property to startWebLogic.sh</p> <p>Restart the NodeManager after making changes.</p>	<p>Sample nodemanager.properties file:</p> <pre>SecureListener=false StartScriptName=startWebLogic.sh StartScriptEnabled=true</pre>
<p>Creating the WebLogic instances is complete.</p>	

Prerequisite - Oracle Database Schemas

Task	Notes
<p>Each Oracle Retail Application has an associated set of RIB Artifacts that must be installed as part of the RIB integration. For example, the RIB Hospital Tables, CLOB API libraries, and Oracle Objects.</p> <ul style="list-style-type: none"> ■ Ensure that these have been installed appropriately per the individual applications. ■ Ensure that the TAFR Hospital user and objects exist. ■ Ensure that the RIB user has appropriate access and permissions. 	<p>Each Application packages the RIB artifact creation scripts and they are installed at the time of the application's installation.</p> <p>It is critical to ensure that they have been installed and are the correct version.</p> <p>The TAFR Hospital is independent of any of the applications and should have a separate user/schema created for it.</p> <p>It is recommended that all applications have a separate Hospital and that they be logically and operationally associated with that application.</p>
<p>Ensure that each PL/SQL application schema has run the RIB supplied scripts to create the RIB Artifacts:</p> <ul style="list-style-type: none"> ■ 1_KERNEL_CREATE_OBJECTS.SQL script. ■ InstallAndCompileAllRibOracleObjects.sql ■ 1_CLOB_CREATE_OBJECTS.SQL (RMS only) 	<p>Verify the XML Developer's Kit for PL/SQL is installed.</p>
<p>RMS Application: Verify that the row in the RIB_OPTIONS table has correct values to match the RIB deployment environment.</p>	<p>XML_SCHEMA_BASE_URL= http://<hostname>:<port>/rib-func-artifact;</p>
<p>Ensure that each Java EE application schema has run the RIB supplied scripts to create RIB artifacts:</p> <ul style="list-style-type: none"> ■ 1_KERNEL_CREATE_OBJECTS.SQL script. 	

Task	Notes
<p>RIB TAFR RIB Hospital</p> <p>Ensure that the schema exists and has run the RIB supplied script to create the RIB Hospital.</p> <ul style="list-style-type: none"> 1_KERNEL_CREATE_OBJECTS.SQL script. 	<p>In RIB 16.x, there is a separate hospital for all RIB TAFRs. Ensure that there is a user created for the RIB components and the scripts that create the hospital objects have been run. The TAFR Hospital user requires no special permissions.</p> <pre>CREATE USER <tafr hosp user> IDENTIFIED BY <tafr hosp password> DEFAULT TABLESPACE "USERS" TEMPORARY TABLESPACE "TEMP"; GRANT "CONNECT" TO <tafr hosp user>; GRANT "RESOURCE" TO <tafr hosp user>; ALTER USER <tafr hosp user> QUOTA UNLIMITED ON USERS;</pre>

Prerequisite - Prepare Oracle AQ JMS Provider

Task	Notes
<p>Create the Oracle Database instance that will be the JMS Provider.</p>	<p>Oracle Streams AQ is provided by the Oracle Database Enterprise Edition installation.</p> <p>Note: It is strongly recommended that the Oracle Database instance that is configured to be the JMS provider is not shared with any other applications and not be on the same host (physical or logical) with any other applications.</p> <p>See "Deployment Architecture" in the <i>Oracle Retail Integration Bus Implementation Guide</i>.</p>
<p>Create the AQ JMS user with the appropriate access and permissions to the Oracle Streams AQ packages. This user must have at least the following database permissions.</p> <ul style="list-style-type: none"> CONNECT RESOURCE CREATE SESSION EXECUTE ON SYS.DBMS_AQ EXECUTE ON SYS.DBMS_AQADM EXECUTE ON SYS.DBMS_AQIN EXECUTE ON SYS.DBMS_AQJMS 	<p>Sample script:</p> <pre>CREATE USER <rib aq user> IDENTIFIED BY <rib aq password> DEFAULT TABLESPACE "RETAIL_DATA" TEMPORARY TABLESPACE "TEMP"; GRANT "CONNECT" TO <rib aq user>; GRANT "RESOURCE" TO <rib aq user>; GRANT CREATE SESSION TO <rib aq user>; GRANT EXECUTE ON "SYS"."DBMS_AQ" TO <rib aq user>; GRANT EXECUTE ON "SYS"."DBMS_AQADM" TO <rib aq user>; GRANT EXECUTE ON "SYS"."DBMS_AQIN" TO <rib aq user>; GRANT EXECUTE ON "SYS"."DBMS_AQJMS" TO <rib aq user>; GRANT "AQ_ADMINISTRATOR_ROLE" TO <rib aq user>; ALTER USER <rib aq user> QUOTA UNLIMITED ON RETAIL_DATA;</pre>

Information	Notes
jms-server-home jms-url jms-port jms-user jms-password	<p>JMS Provider for RIB Release 15.0.0 is AQ.</p> <ul style="list-style-type: none"> ■ jms-server-home: The server home must be in the format <code>OsUser@AqHostName:/AqHomeDirectory</code> For example, <code>ribaq@ribaq-lnx-host:/u00/db</code> "jms-url : AQ thin JDBC connection URL. For example, <code>jdbc:oracle:thin:@ribaq-lnx-host:1521:orcl</code> On AQ on RAC database use the long JDBC URL (for example, <code>jdbc:oracle:thin:@(DESCRIPTION=(ADDRESS_LIST=(ADDRESS=(PROTOCOL=TCP)(HOST=ribaq-lnx-virtual-host-1)(PORT=1521))(ADDRESS=(PROTOCOL=TCP)(HOST=ribaq-lnx-virtual-host-2)(PORT=1521))(LOAD_BALANCE=yes)(CONNECT_DATA=(SERVICE_NAME=orcl)))</code>) ■ jms-port: AQ JMS server listener port. This is same as the AQ JDBC listener port (for example, 1521). ■ jms-user: AQ JMS user. This is the database user that can connect to jms-url (see above). ■ jms-password: AQ JMS password. This is the database password that can connect to jms-url.
weblogic-domain-name weblogic-domain-home weblogic-domain-server-port java-home	<p>For each of the WebLogic Servers to which the RIB components will be deployed.</p> <ul style="list-style-type: none"> ■ weblogic-domain-name: Your weblogic domain name (for example, <code>base_domain</code>). ■ weblogic-domain-home: The format of the home must follow the format <code>OsUser@WeblogicHostName:/WeblogicDomainPath</code>. For example: <code>ribapp@ribapp-lnx-host:/home/Oracle/Middleware/user_projects/domains/base_domain</code> ■ weblogic-admin-server-port: The port where weblogic admin server is listening (for example, 7001) ■ java-home : Java Home directory of the remote Weblogic server (for example, <code>/usr/java/jdk1.8.0_64</code>)
wls-instance-name wls-instance-home wls-listen-port wls-user-alias	<p>The WebLogic instances for each of your <code>rib-<app></code> applications that are in-scope.</p> <ul style="list-style-type: none"> ■ wls-instance-name: The WebLogic managed server instance name. For example, <code>rib-rms</code> will be deployed in <code>rib-rms-server</code>. ■ wls-instance-home: The WebLogic instance server home information. For example, <code>ribapp@ribapp-lnx-host:/home/Oracle/Middleware/user_projects/domains/base_domain/servers/rib-rms-server</code> ■ wls-listen-port: The WebLogic managed server listen port. For example, 7003. ■ wls-user-alias: User alias for username/password to connect to the WebLogic managed server. The username/password are stored in a wallet file in <code>rib-home/deployment-home/conf/security</code> folder and the <code>rib-deployment-env-info.xml</code> contains the alias name for that. The user name/password to connect to the managed server will be same as the user who starts the WebLogic server.

Information	Notes
To configure each rib-<app>, this information is needed for each.	<ul style="list-style-type: none"> ■ The application server where it will be deployed. ■ RIB Hospital database information. ■ PL/SQL application database information. ■ E-mail notification information. ■ jndi information for Java EE applications.
For RIB Hospital database: database/url <database user> <database password>	<ul style="list-style-type: none"> ■ database/url: rib-<app> error hospital thin JDBC connection URL. For example, jdbc:oracle:thin:@ribapp-lnx-host:1521:orcl If RIB Hospital tables are running on RAC database use the long JDBC url format. For example, jdbc:oracle:thin:@(DESCRIPTION =(ADDRESS_LIST =(ADDRESS = (PROTOCOL = TCP)(HOST = ribapp-lnx-virtual-host-1)(PORT = 1521))(ADDRESS = (PROTOCOL = TCP)(HOST = ribapp-lnx-virtual-host-2)(PORT = 1521))(LOAD_BALANCE = yes))(CONNECT_DATA =(SERVICE_NAME = orcl))) ■ <database user>: This is the database user that will be used to connect to rib-<app> error hospital tables. ■ <database password>: This is the database password that will be used to connect to rib-<app> error hospital tables.
For PL/SQL application database: database/url <database user> <database password>	See samples in the row above for RIB Hospital Database.
For email notifications: email-server-host email-server-port from-address to-address-list	<ul style="list-style-type: none"> ■ email/email-server-host: The SMTP mail server (for example, mail.yourcompany.com) ■ email/email-server-port: The SMTP mail server port. (for example, 25) ■ email/from-address: The email address from which the RIB notifications will originate (for example, ribadmin@example.com) ■ email/to-address-list: Comma separated list of destination email address to which RIB notifications will be sent (for example, ribappsadmin1@example.com, ribappsadmin2@example.com)
joined information for Java EE applications: jndi/url jndi/factory jndi/user jndi/password	<p>jndi/url: The JNDI url for the retail <app> that this rib-<app> is connecting to. The URLs must use the following format.</p> <p>WLS URL format:t3://host:port/applicationName</p> <p>For example, t3://simhost.example.com:18022/rib-sim.</p> <p>jndi/factory: The JNDI provider factory class name. The factory must be one of the following.</p> <ul style="list-style-type: none"> ■ WLS factory: weblogic.jndi.WLInitialContextFactory ■ jndi/user: The retail <app> JNDI user name. This is the same as the retail <app> WLS server instance user name. ■ jndi/password: The retail <app> JNDI password. This is same as the retail <app> WLS server instance password. <p>For example, weblogic (must be encrypted)</p>

Install Using the RIB Installer GUI

Task	Notes
<p>Make sure that the JAVA_HOME environment variable is set for the user that will be performing these tasks.</p> <pre>> echo \$JAVA_HOME /usr/bin/java/1.8.0_64</pre> <p>with latest security updates.</p>	<p>Example: export JAVA_HOME=/usr/bin/java/1.8.0_64.</p>
<p>Make sure that all RIB WebLogic instances that are to be deployed to are running.</p>	
<p>Determine the host and file system to create the rib-app-builder home directory on.</p> <pre>> mkdir rib-app-builder</pre>	<p>See the <i>Oracle Retail Integration Bus Implementation Guide</i> for guidelines and deployment approaches.</p> <p>This is an important strategic decision, because all RIB configurations and management for a given deployment will be from this single, central location.</p>
<p>Download and extract the RibKernel<RIB_MAJOR_VERSION>ForAll<RETAIL_APP_VERSION>Apps_eng_ga.tar.</p> <pre>> tar xvf RibKernel16.0.21ForAll16.x. xApps_eng_ga.jar</pre>	<p>Copy the latest version to the rib-app-builder and then extract it to build your rib-home. This rib-home will be the directory from where you will perform all rib-<app> related tasks from now on.</p>
<p>Download the RibFuncArtifact<RIB_{MAJOR MINOR}_VERSION>ForAll<RETAIL_APP_VERSION>Apps_eng_ga.tar and put it in rib-home/download-home/rib-func-artifacts directory.</p>	<p>Do not extract the tar file. This will be done by the check-version-and-unpack tool.</p>
<p>Download all the RibPak<RIB_{MAJOR MINOR}_VERSION>For<RETAIL_APP_NAME><RETAIL_APP_VERSION>_eng_ga.tar and put it in rib-home/download-home/all-rib-apps directory.</p>	<p>Do not extract the tar file. This will be done by the check-version-and-unpack tool.</p>
<p>Return to the root rib-home directory.</p>	
<p>Execute rib-installer.sh</p> <pre>> ./rib-installer.sh</pre> <p>This will start the x-term GUI.</p>	<p>For installations using a remote client (x-term) set the DISPLAY variable appropriately first.</p> <pre>> export DISPLAY=[desktop IP]:0.0</pre> <p>Make sure that your local machine has an X-server (such as Xceed) running.</p>

Task	Notes
Verify Application URL settings match RIB installation.	RIB Functional Artifact URL JNDI URL
Bounce all rib-<app>-wls server instances.	During the installation a shared library is created that contains the JDBC Driver update. It is necessary to bounce the instance.
Verify the installation using RDMT.	

Install Using the RIB App Builder Command Line Tools

Task	Notes
Make sure that the JAVA_HOME environment variable is set for the user that will be performing these tasks. > echo \$JAVA_HOME /usr/bin/java/jdk1.8.0_64	Example: export JAVA_HOME=/usr/bin/java/jdk1.8.0_64
Make sure that all RIB WebLogic instances that are to be deployed to are running.	
Determine the host and file system to create the rib-app-builder home directory on. > mkdir rib-app-builder	See the <i>Oracle Retail Integration Bus Implementation Guide</i> for guidelines and deployment approaches. This is an important strategic decision, because all RIB configurations and management for a given deployment will be from this single, central location.
Download and extract the RibKernel<RIB_MAJOR_VERSION>ForAll<RETAIL_APP_VERSION>Apps_eng_ga.tar. > tar xvf RibKernel16.0.21ForAll16.x.xApps_eng_ga.jar	Copy the latest version to the rib-app-builder and then extract it to build your "rib-home." This "rib-home" will be the directory from where you will perform "all" the rib-<app> related tasks from now on.
Download the RibFuncArtifact<RIB_MAJOR_VERSION>ForAll<RETAIL_APP_VERSION>Apps_eng_ga.tar and put it in rib-home/download-home/rib-func-artifacts directory.	Do not extract the tar file. This will be done by the check-version-and-unpack tool.
Download the RibPak<RIB_MAJOR_VERSION>For<RETAIL_APP_NAME><RETAIL_APP_VERSION>_eng_ga.tar and put it in rib-home/download-home/all-rib-apps directory.	Do not extract the tar file. This will be done by the check-version-and-unpack tool.

Task	Notes
Run the rib-home/download-home/bin/check-version-and-unpack.sh script from rib-home/download-home/bin directory.	This script verifies the version compatibility between the paks and extract the files if they are compatible.
Edit rib-home/deployment-home/conf/rib-deployment-env-info.xml file to specify the deployment environment information. See the "Information to Gather for Installation in Remote Server" section before starting the edit.	This file (rib-deployment-env-info.xml) is the only file that the user has to edit. See the "Rib-app-builder documentation" for details and examples. The XML file has four major sections. 1. app-in-scope-for-integration section: In this section you define what applications are in scope for this environment. 2. rib-jms-server section: In this section you define the JMS server information. Note: See also "Preinstallation Steps for Multiple JMS Server Setup" in Chapter 4 of this guide. 3. rib-javaee-containers section: In this section you define the "Java EE container information" for each of the rib-<app> that are in scope. 4. rib-applications section: In this section you define the rib-<app> specific information for each of the rib-<app> that are in scope. For PL/SQL applications you must define RIB RIB Hospital connection and email notification information. For Java EE applications you will need to define RIB Hospital connection, email notification information and the connecting retail application's (for example, <app>) JNDI information.
Edit the app-in-scope-for-integration section to match the desired deployment.	Define what application are in scope for this environment. <pre><app-in-scope-for-integration> <app id="rms" type="plsql-app"/> <app id="tafr" type="tafr-app"/> <app id="sim" type="javaee-app"/> <app id="rwms" type="plsql-app"/> <app id="rpm" type="javaee-app"/> <app id="rfm" type="plsql-app"/> <app id="aip" type="javaee-app"/> <app id="oms" type="soap-app"/> <app id="rxm" type="javaee-app"/> </app-in-scope-for-integration></pre>
Edit the rib-jms-server section. See "Preinstallation Steps for Multiple JMS Server Setup" in Chapter 4 of this guide.	For AQ: <pre><jms-server-home>linux1@linux1:/home/oracle/oracle/product/12.1.0.2/db_1/jms-server-home> <jms-url>jdbc:oracle:thin:@linux1:1521:ora12c</jms-url> <jms-port>1521</jms-port> <jms-user-alias>aql-alias</jms-user-alias></pre>

Task	Notes
<p>Edit the application server section</p>	<p>For example:</p> <pre><weblogic-domain-name>base_ domain</weblogic-domain-name> <weblogic-domain-home>user1@linux1:/home/user1/Oracle/Middleware/user_projects/domains/base_ domain</weblogic-domain-home> <weblogic-admin-server-port>7001</weblogic-admin-server-port> <java-home>/usr/java/jdk1.8</java-home></pre>
<p>Configure the WebLogic instances for each of your rib-<app> applications that are in scope.</p>	<pre><wls id="rib-rms-server"> <wls-instance-name>rib-rms-server</wls-instance-name> <wls-instance-home>soa1@linux1:/home/soa1/Oracle/Middleware/user_projects/domains/base_ domain/servers/rib-rms-server</wls-instance-home> <wls-listen-port protocol="http">7003</wls-listen-port> <wls-user-alias>rib-rms-wls-user-alias</wls-user-alias> </wls></pre>
<p>Configure the rib-applications section: In this section you define the rib-<app> specific information for each rib-<app> that in scope.</p>	<p>For PL/SQL applications you must define the RIB Hospital connection, application database connections, and email notification information.</p> <pre><rib-app id="rib-rms" type="plsql-app"> <deploy-in refid="rib-rms-wls-instance" /> <error-hospital-database> <hospsurl>jdbc:oracle:thin:@rmsdbhost.example.com: 1521:orcl </hospsurl> <hosp-user-alias>rib-<app>_ error-hospital-database_ user-name-alias</hosp-user-alias> </error-hospital-database> <app-database> <app-db-url>jdbc:oracle:thin:@rmsdbhost.example .com: 1521:orcl </app-db-url> <app-db-user-alias>rib-<app>_app-database_ user-name-alias</app-db-user-alias> </app-database> <notifications> <email> <email-server-host>mail.oracle.com</email-server-host> <email-server-port>25</email-server-port> <from-address>admin@example.com</from-address> <to-address-list>admin@example.com</to-address-list> </email> <jmx/> </notifications></pre>

Task	Notes
	<pre> <rib-app id="rib-rms" type="plsql-app"> <deploy-in refid="rib-rms-server"/> <rib-admin-gui> <web-app-url>http://linux1:7003/rib-rms-admin-gui< /web-app-url> <web-app-user-alias>rib-rms_rib-admin-gui_ web-app-user-alias</web-app-user-alias> </rib-admin-gui> <app-database> <app-db-url>jdbc:oracle:thin:@rmsdbhost.example.co m:1521:orribdb </app-db-url> <app-db-user-alias>rib-rms_app-database_ user-name-alias</app-db-user-alias> </app-database> <error-hospital-database> <hosp-url>jdbc:oracle:thin:@rmsdbhost.example.com: 1521:orribdb</hosp-url> <hosp-user-alias>rib-rms_error-hospital-database_ user-name-alias</hosp-user-alias> </error-hospital-database> <notifications> <email> <email-server-host>mail.oracle.com</email-server-h ost> <email-server-port>25</email-server-port> <from-address>admin@example.com</from-address> <to-address-list>admin@example.com</to-address-lis t> </email> <jmx/> </notifications> <app id="rms" type="plsql-app"> <jndi-not-applicable/> </app> </rib-app> </pre>
	<p>For Java EE applications, you must define RIB admin GUI information, RIB Hospital connection, email notification information, and the connecting retail application's (<app>) JNDI information.</p>

Task	Notes
	<p>For SOAP application, you must define the RIB Admin GUI information, RIB Hospital connection, email notification information, and the end point application url information.</p> <pre data-bbox="695 352 1312 751"> <app id="oms" type="soap-app"> <end-point> <url>http://host:port/RibOmsToRsbOmsRouting-ServiceIntegrationFlow/ProxyService/RibOmsToRsbOmsRoutingService</url> <!-- Do we want this location or derive by default? --> <!-- TODO : We need pick the ws policy from this location and push the policy to server. --> <ws-policy-name>policyB</ws-policy-name> <user-alias>rib-oms_ws_security_user-name-alias</user-alias> </end-point> </app> </pre>
<p>Run the rib-home/application-assembly-home/bin/rib-app-compiler.sh script with setup-security-credential from rib-home/application-assembly-home/bin directory.</p> <p>Example:</p> <pre data-bbox="376 1039 673 1087"> ./rib-app-compiler.sh -setup-security-credential </pre>	<p>This will ask for user name and password information for aliases provided in the rib-deployment-env-info.xml file. The user names and passwords are stored in a wallet file inside rib-home/deployment-home/conf/security directory.</p> <p>After that this will generate/assemble a rib-<app> and make it ready for deployment</p>
<p>The RIB apps are now ready to deploy.</p> <p>Execute the rib-home/deployment-home/bin/rib-app-deployer.sh script with the appropriate command line parameter.</p>	<p>This script is located in the rib-home/deployment-home/bin directory.</p>
<pre data-bbox="376 1329 613 1377">> rib-app-deployer.sh -prepare-jms</pre>	<p>This creates a new JMS server with all RIB configured topics.</p>
<pre data-bbox="376 1398 602 1476">>rib-app-deployer.sh -verify-error-hospital rib-<app></pre>	<p>This verifies:</p> <ol data-bbox="695 1440 1300 1528" style="list-style-type: none"> 1. Error-hospital database configurations by testing the connection to the database. 2. If the error-hospital tables are created in the schema. <p>Note: Database must be already running.</p>
<pre data-bbox="376 1587 643 1665">> rib-app-deployer.sh -deploy-rib-func-artifact-war</pre>	<p>This deploys the rib-func-artifact.war to the Java EE container.</p>
<pre data-bbox="376 1688 607 1766">> rib-app-deployer.sh -deploy-rib-app-ear rib-<app></pre>	<p>This deploys the rib-<app> to the Java EE container. Repeat this step for all rib-<app> that is in scope for this integration environment.</p> <p>Note: <app> must be rms, rwms, tafr, sim, rpm, or aip.</p>
<p>Bounce all of the rib-<app>-wls-instances.</p>	<p>During the installation a shared library is created that contains the JDBC Driver update. It is necessary to bounce the wls instance.</p>

Task	Notes
Verify Application URL settings match RIB installation.	RIB Functional Artifact URL JNDI URL
Verify the installation using RDMT	

RDMT - Information to Gather

The following are necessary directory parameters.

RDMT Home Directory	Rib16021ForAll16xxApps/rib-home/tools-home/rdmt/
RDMTLOGS Directory	Rib16021ForAll16xxApps/rib-home/tools-home/rdmt/RDMTLOGS
Temp Files Directory	Rib16021ForAll16xxApps/rib-home/tools-home/rdmt/RDMTLOGS/tmp
RIB App Builder rib-home Directory	/u00/Rib16021ForAll16xxApps/rib-home

The following are parameters for JMS Provider.

AQ JMS User ID	<rib aq user>
AQ JMS Password	<rib aq password>
AQ JMS Database Name	soa1
JMS HOST	jmshost.example.com
JMS PORT	1521

The following are WebLogic parameters for JMX functions.

WebLogic/JMX Host	wlshost.example.com
JMX Req Port	7003
WebLogic Instance name	rib-rms-wls-instance
WebLogic App Name	rib-rms
WebLogic User Name	<weblogic user>
WebLogic Password	<weblogic password>

The following are parameters for each hospital (RMS, RWMS, SIM, and others).

User Name	<rms user>
Password	<rms password>
Database (SID)	orcl
Database Host	dbhost.example.com
Listener Port	1521

RDMT - Installation

The following are the steps required to complete RDMT installation.

Task	Notes
Make sure that the Java path is set Java 8.0. > java -version	The RDMT Java support classes require Java 8.0, and installation will perform a check and fail if the path is not correct. Prior to the installation, verify that your Java version is correct.
Download the Rdmt16.0.21ForAll16.x.x Apps_eng_ga.tar.	The recommended location is in rib-home/tools-home directory. There is an empty rdmt subdirectory already there. This is only a placeholder. RDMT can be installed under any user in any directory.
Extract the tar file. > tar xvf Rdmt16.0.21ForAll16.x.x Apps_eng_ga.tar	Extract the tar file. It will create or over-write a directory call rdmt.
Execute the configbuilder.sh script. > ./configbuilder.sh	cd to the rdmt directory and execute the configbuilder.sh script supplied with the toolkit.
If rdmt is extracted under rib-home, it updates the necessary rdmt configuration files if installed under rib-home/tools-home/rdmt directory.	The configbuilder.sh script checks if rdmt is installed under rib-home. If so, it fetches and updates all the necessary configuration information from rib-deployment-env-info.xml present under rib-home/deployment-home/conf directory. Also, it configures for all the rib-<app>s depending upon the applications in scope as defined in rib-deployment-env-info.xml.
If rdmt is extracted in some other directory outside rib-home, it updates the necessary rdmt configuration files if installed in some other directory with rib-home present on same server.	Once prompted for rib-home path, provide the same and it fetches and updates all the necessary configuration information from rib-deployment-env-info.xml present under specified rib-home/deployment-home/conf directory. Also, it configures for all the rib-<app>s depending upon the applications in scope as defined in rib-deployment-env-info.xml.
If rdmt is extracted in a remote server with no rib-home present, answer prompts for RIB configuration values during Setup if installed in a remote server with no rib-home present on that server.	The installation script will prompt for the configuration settings need to run the tools in the toolkit (See the section, "Information to Gather for Installation in Remote Server", in this manual.) Note: After the installation, these configurations can be changed at any time via any text editor in the appropriate configuration file.
Answer prompts for the additional JMX configurations. Answer yes to configure additional rib-apps in case of remote installation.	After prompting for the necessary configuration parameters, the setup script updates the various configuration files and then prompts the user for additional JMX configurations that the user will be interested in. It is recommended that you configure all the rib-apps that have been installed in the RIB Installation process and then run the RibConfigReport. This report will run a battery of tests that will validate the RIB components installed.

Task	Notes
The configbuilder.sh script will set the permissions to 700 (-rwx-----) on all tools and files within the rdmt directory structure.	There are configurations that contain passwords.
Run Configuration Report	This report will execute using all of the configuration parameter that have been supplied and will verify them against the RIB installation
Installation is complete.	

RIB Hospital Administration (RIHA) - Installation

The following is a checklist for Oracle Retail RIHA installation.

Task	Notes
Verify the JRE Installed on server/PC where RIHA will be installed.	The minimum and preferred Java Runtime Engine (JRE) version to use with RIHA is 1.7.
The RIB XSDs must be made network-accessible for RIHA to properly display RIB messages.	The RIB Functional Artifact URL (for example, http://ribhost.example.com:7777/rib-func-artifact/payload/xsd/) should be accessible to all RIHA users.
Verify RIHA version is compatible with RIB version.	Due to changes in the underlying RIB architecture RIHARelease 15.0.0 is compatible only with RIB16.0.X and higher.
Verify ADF runtime 12.2.1 is available in the WebLogic 12.2.1 domain where RIHA will be installed.	RIHA model and view components needs ADF runtime to function properly.
Ensure the Firefox browser version is 3.5 or higher.	RIHA GUI works better in Firefox version 3.5 or higher.
Deploy EAR	

Task	Notes
RIHA app can be deployed from rib-home	<p>Steps to deploy riha app from rib-home:</p> <ol style="list-style-type: none"> 1. Download the RibHospitalAdministration-Web-16.0.21ForAll16.x.xApps_eng_ga.tar and extract it to RIB_INSTALL/rib-home/tools-home 2. Navigate to the location rib-home/tools-home/riha/conf 3. Edit the riha-deployment-env-info.properties with riha-admin-server-connection-url value 4. Compiling the riha-app by executing tools-home/riha/bin: ./riha-app-compiler.sh -setup-security-credential 5. Prepare weblogic for riha deployment by executing (Creating Datasource for no of apps in scope of rib-deployment info xml) tools-home/riha/bin: ./riha-app-deployer.sh -prepare-wls 6. Deployment by executing tools-home/riha/bin: ./riha-app-deployer.sh -deploy-riha-app 7. Undeploying by executing tools-home/riha/bin: ./riha-app-deployer.sh -undeploy-riha-app <p>Note:</p> <ol style="list-style-type: none"> 1. The target server name where RIHA app should be deployed in riha-deployment properties For example: <code>riha-wls-target-name=AdminServer</code> - Means riha app will deploys to 'AdminServer' <code>riha-wls-target-name=m1</code> - Means riha app will deploys to Managed Server 'm1' 2. The cluster name where RIHA app should be deployed For example: <code>riha-wls-target-name=no_cluster</code> - Means riha app will deploys to target name given for the property <code>riha-wls-target-name=NewCluster_1</code> - Means riha app will deploys to cluster named New_Cluster_1
Log in to the WebLogic Console	Log in to the WebLogic server console where RIHA will be installed.
Post Deployment Configuration	
Test Deployment	<ol style="list-style-type: none"> 1. In the left pane, select Deployments > Applications. 2. Select the installed RIHA application. 3. Select Context > Test.

Integration Gateway Services (IGS) Installation - Information to Gather

The following are the details for the RIB AQ JMS.

Field Name	Example	Comment
Database Name	ora12c	AQ Database instance name
Host Name	linux1.us.oracle.com	Database system
Port	1521	Database listener port
Database User Name	<rib aq user>	AQ user
Password	<rib aq password>	AQ user password

IGS - Installation (Optional)

Task	Notes
Install IGS component.	This component is optional and should be installed only if there is a requirement to do so. See "Integration Gateway Services" in the <i>Oracle Retail Integration Bus Implementation Guide</i> .
Prepare Oracle WebLogic Server	Prerequisite. Work with System and Application administrators on appropriate deployment. See "Integration Gateway Services" in the <i>Oracle Retail Integration Bus Implementation Guide</i> .
Create IGS WebLogic Server	The igs-service.ear file should be deployed on its own WebLogic server. When naming the WebLog instance, it is recommended (but not required) that the .ear file name is used (without the extension), along with underscore, wls_instance. For example, if the .ear file name is igs-service.ear, the instance name would be igs-service_wls_instance.
Prepare to deploy the IGS application:	The recommended location is rib-home/tools-home directory. There is an empty integration-bus-gateway-services subdirectory already there. This is only a placeholder.
Download the IntegrationGatewayService16.0.21ForAll16.0.21Apps_eng_ga.tar	
Extract the tar file	>tar -xvf IntegrationGatewayService16.0.21ForAll16.0.21Apps_eng_ga.tar
Modify the IgsConfig.properties file	Update the WlsUrl property in this file to the WebLogic URL where IGS is going to be deployed. For example, t3://igshost.example.com:18001 Update the WlsTarget property in this file to the name of the WebLogic instance to which it will be deployed. For example, igs-service-wls-instance
Install IGS	Run the igs-install.sh located under rib-home/tools-home/integration-bus-gateway-services/bin The script will prompt for the WebLogic user name and password. The script will configure the server and install IGS.

IGS - Verify Installation

Task	Notes
Verify the IGS Application installation using the Administration Console.	For the Test Client link to be visible the server must be in Development mode. For more detailed verification testing, see Chapter 4, "Integration Gateway Service (IGS) Testing," in the <i>Oracle Retail Integration Guide Operations Guide</i> .
Navigate to Deployments page.	Navigate to the Deployments page. On the Summary of Deployments page, locate the igs-service on. Click the plus sign next to the ig-service to expand the tree. Locate the Web Services section.
Click any Web service to move to Settings for ASNInPublishingService page.	For example, ASNInPublishingService.
Select the Testing tab.	Click the + next to the service name to expand the tree. Locate the Test Client link. Select to move to the WebLogic Test Client page.
Select Ping operations.	Select the Ping operation. Fill in test data in the string arg0: text box. Click Ping . The test page will show the request message and the response message.

Appendix: Changing the RIB Admin GUI Password

This appendix describes the steps required to change the RIB Admin GUI password.


Procedure

To change the RIB Admin GUI password, complete the following steps.


1. Log in to the WebLogic Server Administration Console.




2. In the left panel, click the **Security Realms** link.

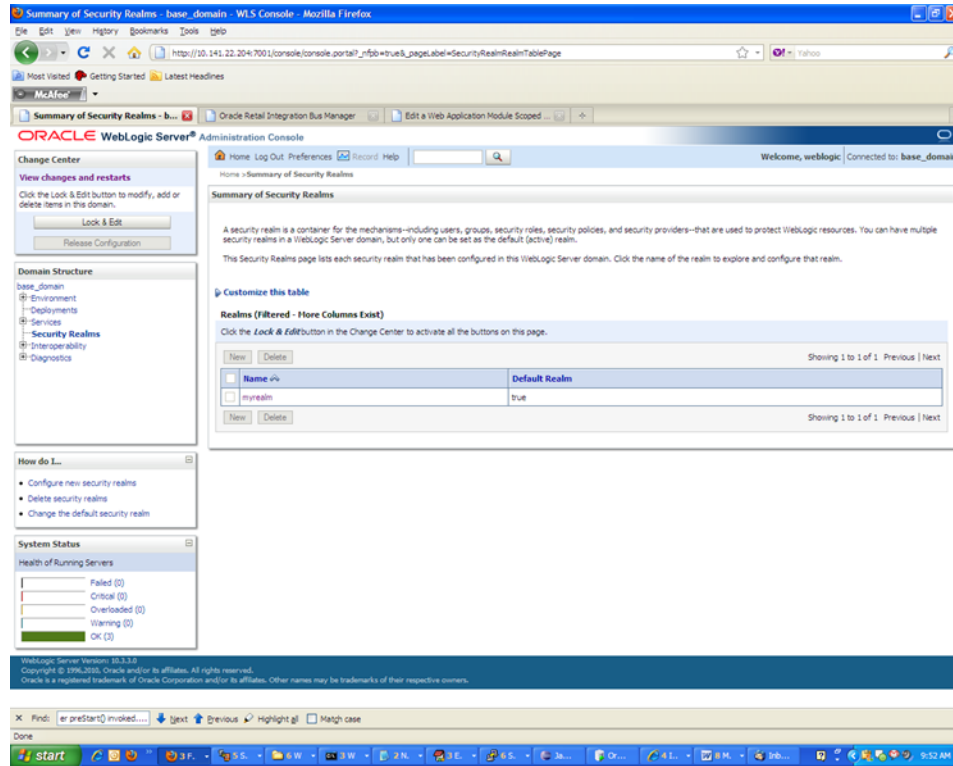


3. Click the realm name. Go to the Users and Groups tab.

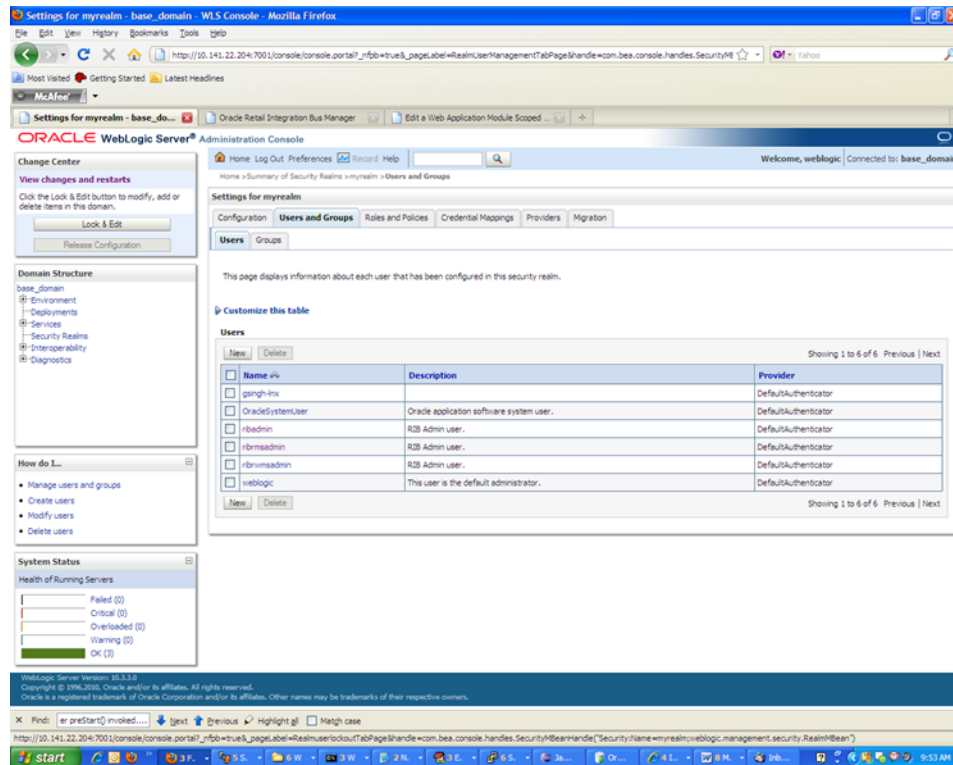


4. Click the user name for which you want to change the password.

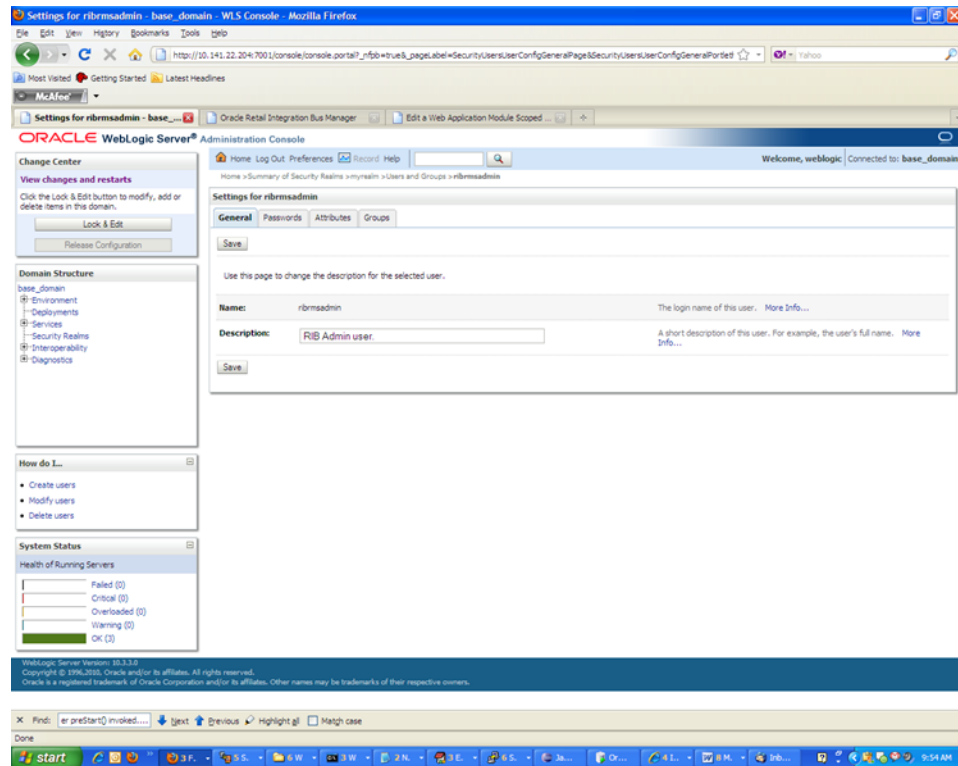

5. Click the Passwords tab.

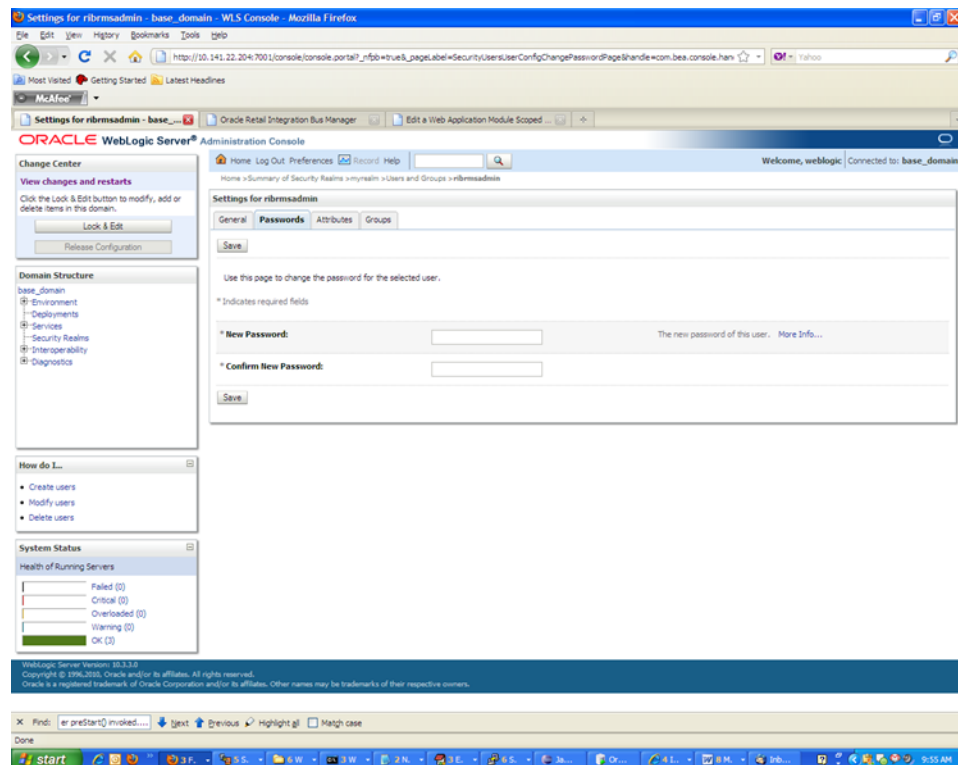

6. Enter the new password. Click Save.

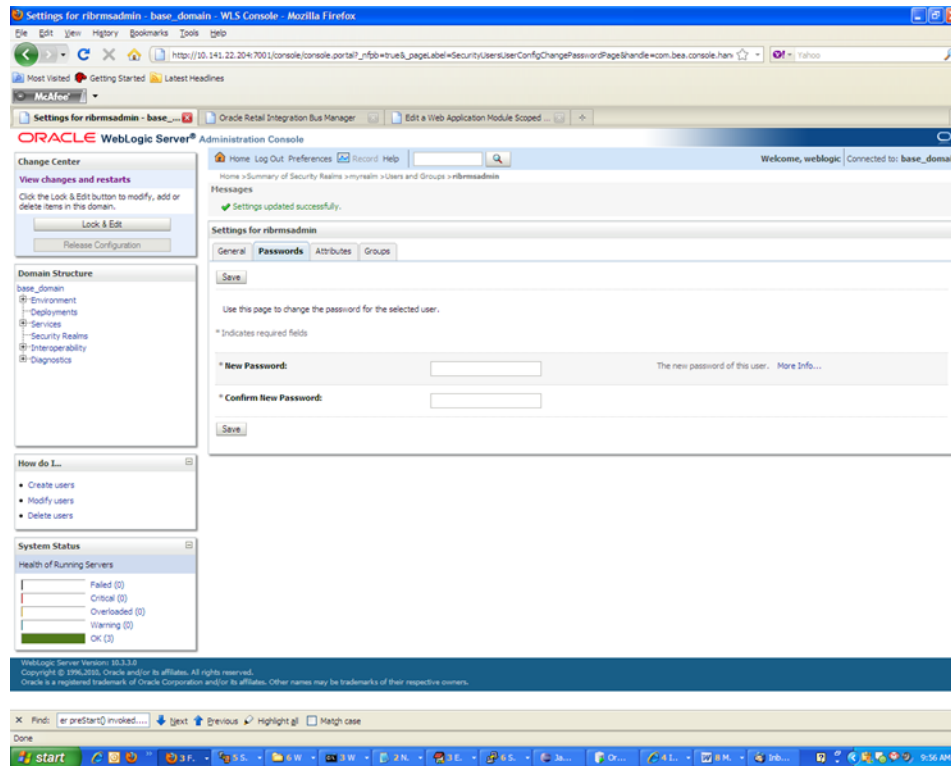

Appendix: configWss.py

This appendix includes a code sample for configWss.py.

```
userName = sys.argv[1]
passWord = sys.argv[2]
url="t3://" + sys.argv[3] + ":" + sys.argv[4]
print "Connect to the running adminSever"
connect(userName, passWord, url)
edit()
startEdit()
#Enable assert x509 in SecurityConfiguration
rlm = cmo.getSecurityConfiguration().getDefaultRealm()
ia = rlm.lookupAuthenticationProvider("DefaultIdentityAsserter")
activeTypesValue = list(ia.getActiveTypes())
existed = "X.509" in activeTypesValue
if existed == 1:
    print 'assert x509 is already enabled'
else:
    activeTypesValue.append("X.509")
ia.setActiveTypes(array(activeTypesValue, java.lang.String))
ia.setDefaultUserNameMapperAttributeType('CN');
ia.setUseDefaultUserNameMapper(Boolean('true'));

#Create default WebServiceSecurity

securityName='default_wss'
defaultWss=cmo.lookupWebServiceSecurity(securityName)
if defaultWss == None:
    print 'creating new webservice security bean for: ' + securityName
    defaultWss = cmo.createWebServiceSecurity(securityName)
else:
    print 'found existing bean for: ' + securityName

#Create credential provider for DK

cpName='default_dk_cp'
wtm=defaultWss.lookupWebServiceCredentialProvider(cpName)
if wtm == None:
    wtm = defaultWss.createWebServiceCredentialProvider(cpName)
    wtm.setClassName('weblogic.wsee.security.wssc.v200502.dk.DKCredentialProvider')
    wtm.setTokenType('dk')
    cpm = wtm.createConfigurationProperty('Label')
    cpm.setValue('WS-SecureConversationWS-SecureConversation')
    cpm = wtm.createConfigurationProperty('Length')
    cpm.setValue('16')

else:
```

```

    print 'found existing bean for: DK ' + cpName

#Create credential provider for x.509

cpName='default_x509_cp'
wtm=defaultWss.lookupWebServiceCredentialProvider(cpName)
if wtm == None:
wtm = defaultWss.createWebServiceCredentialProvider(cpName)
wtm.setClassName('weblogic.wsee.security.bst.ServerBSTCredentialProvider')
wtm.setTokenType('x509')
else:
    print 'found existing bean for: x.509 ' + cpName

#Custom keystore for xml encryption

cpName='ConfidentialityKeyStore'
cpm=wtm.lookupConfigurationProperty(cpName)
if cpm == None:
cpm = wtm.createConfigurationProperty(cpName)
keyStoreName=sys.argv[5]
cpm.setValue(keyStoreName)
cpName='ConfidentialityKeyStorePassword'
cpm=wtm.lookupConfigurationProperty(cpName)
if cpm == None:
cpm = wtm.createConfigurationProperty(cpName)
cpm.setEncryptValueRequired(Boolean('true'))
KeyStorePasswd=sys.argv[6]
cpm.setEncryptedValue(KeyStorePasswd)
cpName='ConfidentialityKeyAlias'
cpm=wtm.lookupConfigurationProperty(cpName)
if cpm == None:
cpm = wtm.createConfigurationProperty(cpName)
keyAlias=sys.argv[7]
cpm.setValue(keyAlias)
cpName='ConfidentialityKeyPassword'
cpm=wtm.lookupConfigurationProperty(cpName)
if cpm == None:
cpm = wtm.createConfigurationProperty('ConfidentialityKeyPassword')
cpm.setEncryptValueRequired(Boolean('true'))
keyPass=sys.argv[8]
cpm.setEncryptedValue(keyPass)

#Custom keystore for xml digital signature

cpName='IntegrityKeyStore'
cpm=wtm.lookupConfigurationProperty(cpName)
if cpm == None:
cpm = wtm.createConfigurationProperty(cpName)
keyStoreName=sys.argv[5]
cpm.setValue(keyStoreName)
cpName='IntegrityKeyStorePassword'
cpm=wtm.lookupConfigurationProperty(cpName)
if cpm == None:
cpm = wtm.createConfigurationProperty(cpName)
cpm.setEncryptValueRequired(Boolean('true'))
KeyStorePasswd=sys.argv[6]
cpm.setEncryptedValue(KeyStorePasswd)
cpName='IntegrityKeyAlias'
cpm=wtm.lookupConfigurationProperty(cpName)

```

```
if cpm == None:
    cpm = wtm.createConfigurationProperty(cpName)
    keyAlias=sys.argv[7]
    cpm.setValue(keyAlias)
    cpName='IntegrityKeyPassword'
    cpm=wtm.lookupConfigurationProperty(cpName)
    if cpm == None:
        cpm = wtm.createConfigurationProperty(cpName)
        cpm.setEncryptValueRequired(Boolean('true'))
        keyPass=sys.argv[8]
        cpm.setEncryptedValue(keyPass)

#Create token handler for x509 token

#cpName='default_x509_handler'
th=defaultWss.lookupWebserviceTokenHandler(cpName)
if th == None:
    th = defaultWss.createWebserviceTokenHandler(cpName)
    th.setClassName('weblogic.xml.crypto.wss.BinarySecurityTokenHandler')
    th.setTokenType('x509')
    cpm = th.createConfigurationProperty('UseX509ForIdentity')
    cpm.setValue('true')
    save()
    activate(block="true")
    disconnect()
    exit()
```



Appendix: RIB Domain Configuration for Policy A


The RIB Domain Configuration for Policy A appendix provides instructions to deploy wsm-pm and EM apps, as well to configure ssl port for wsm-pm.

RIB Domain Creation Template Options

Perform the following procedure to configure the RIB domain:

1. Select the following RIB domain creation template options:

Figure F–1 Domain Creation Template Options

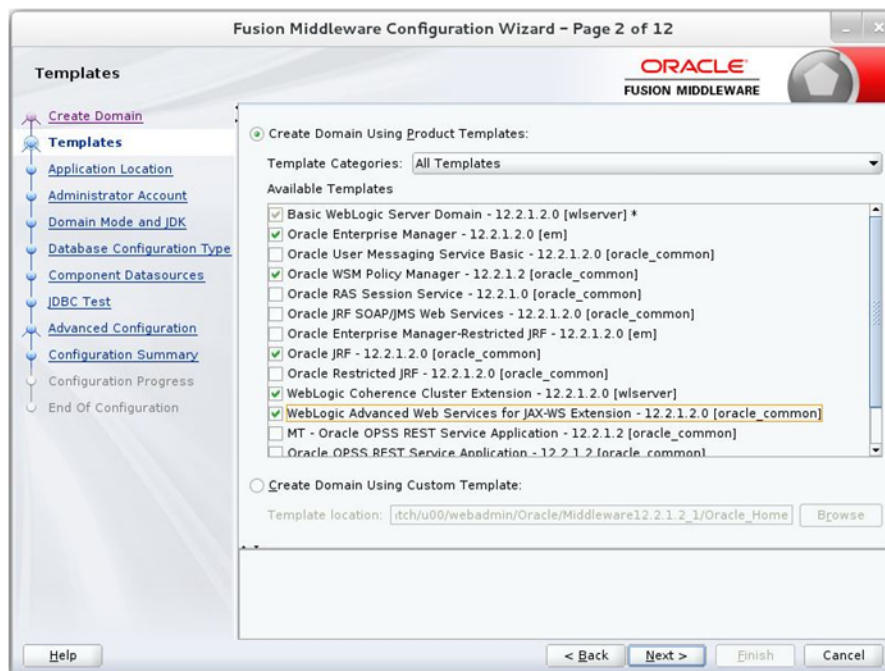


2. Access the enterprise Manager URL of WebLogic.

For example: <https://<host>:<port>/em>

3. From the navigation pane, expand WebLogic Domain and select the domain to be configured.

4. From the WebLogic Domain menu, select Web Services, then WSM Domain Configuration.
5. Select the Policy Access tab.
6. In the Policy Manager section of the page, clear the Auto Discover check box. The PM URL Edit button is enabled.
7. Click the PM URL Edit button.
8. In the Edit PM URL Values page, click the sign and enter the URL for the Administration Server, such as `t3s://host:admin_port/wsm-pm`.
For example, `t3s://localhost:9002/wsm-pm`.
9. Click OK to close the window.

Figure F-2 Edit the Policy Manager URL

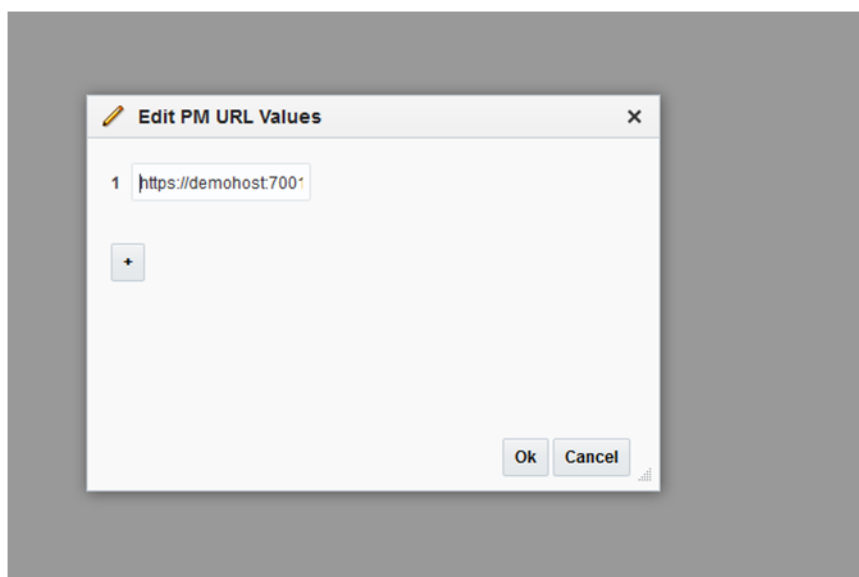

10. Click Apply on the Policy Access page.

Appendix: Installation Order

This section provides a guideline for the order in which the Oracle Retail applications should be installed. If a retailer has chosen to use only some of the applications, the order is still valid, less the applications not being installed.

Note: The installation order is not meant to imply integration between products.

Enterprise Installation Order

1. Oracle Retail Merchandising System (RMS), Oracle Retail Trade Management (RTM)
2. Oracle Retail Sales Audit (ReSA)
3. Oracle Retail Extract, Transform, Load (RETL)
4. Oracle Retail Warehouse Management System (RWMS)
5. Oracle Retail Invoice Matching (ReIM)
6. Oracle Retail Price Management (RPM)
7. Oracle Retail Allocation
8. Oracle Retail Mobile Merchandising (ORMM)
9. Oracle Retail Customer Engagement (ORCE)
10. Oracle Retail Xstore Office
11. Oracle Retail Xstore Point-of-Service, including Xstore Point-of-Service for Grocery, and including Xstore Mobile
12. Oracle Retail Xstore Environment
13. Oracle Retail EFTLink
14. Oracle Retail Store Inventory Management (SIM), including Mobile SIM
15. Oracle Retail Predictive Application Server (RPAS)
16. Oracle Retail Predictive Application Server Batch Script Architecture (RPAS BSA)
17. Oracle Retail Demand Forecasting (RDF)
18. Oracle Retail Category Management Planning and Optimization/Macro Space Optimization (CMPO/MSO)
19. Oracle Retail Replenishment Optimization (RO)

20. Oracle Retail Regular Price Optimization (RPO)
21. Oracle Retail Merchandise Financial Planning (MFP)
22. Oracle Retail Size Profile Optimization (SPO)
23. Oracle Retail Assortment Planning (AP)
24. Oracle Retail Item Planning (IP)
25. Oracle Retail Item Planning Configured for COE (IP COE)
26. Oracle Retail Advanced Inventory Planning (AIP)
27. Oracle Retail Integration Bus (RIB)
28. Oracle Retail Services Backbone (RSB)
29. Oracle Retail Financial Integration (ORFI)
30. Oracle Retail Bulk Data Integration (BDI)
31. Oracle Retail Integration Console (RIC)
32. Oracle Commerce Retail Extension Module (ORXM)
33. Oracle Retail Data Extractor for Merchandising
34. Oracle Retail Clearance Optimization Engine (COE)
35. Oracle Retail Analytic Parameter Calculator for Regular Price Optimization (APC-RPO)
36. Oracle Retail Insights, including Retail Merchandising Insights (previously Retail Merchandising Analytics) and Retail Customer Insights (previously Retail Customer Analytics)
37. Oracle Retail Order Broker