

Application Server Installation Guide for OPSS - CSF  
Oracle FLEXCUBE Universal Banking  
Release 12.4.0.0.0  
[May] [2017]



---

# Table of Contents

1.	<b>Application Server Installation Guide for OPSS - CSF.....</b>	1
1.1	<i>Introduction .....</i>	1
1.2	<i>Application Server Installation for OPSS – CSF.....</i>	1
1.	<i>Create Weblogic Domain with Oracle Enterprise Manager &amp; Oracle JRF templates .....</i>	1
2.	<i>Extend an existing Weblogic Domain with Oracle Enterprise Manager &amp; Oracle JRF templates .....</i>	1
3.	<i>Create schemas using RCU.....</i>	1
1.3	<i>Create OPSS schemas using RCU .....</i>	1
1.	<i>Run ./rcu from Oracle_Home/oracle_common/bin .....</i>	1
2.	<i>Select Create Repository &amp; System load and product load .....</i>	1
3.	<i>Provide database connection details (sys/sysdba user and password).....</i>	1
4.	<i>Select OPSS.....</i>	1
5.	<i>Provide schema passwords .....</i>	1
6.	<i>Map table spaces .....</i>	1
7.	<i>Click on Create button to complete installation.....</i>	1
8.	<i>Close .....</i>	1
1.4	<i>Create Weblogic domain using domain templates.....</i>	1
1.	<i>Select Basic Weblogic Server Domain .....</i>	1
2.	<i>Select Oracle Enterprise Manager.....</i>	1
3.	<i>Select Oracle JRF .....</i>	1
a)	<i>[once we select Oracle JRF , tool selecting Weblogic Coherence Cluster Extension also ].....</i>	1
4.	<i>Select application location [select default values] .....</i>	1
5.	<i>Select admin account .....</i>	1
6.	<i>Select domain mode &amp; JDK.....</i>	1
7.	<i>Database configuration Types .....</i>	1
a)	<i>Select RCU data .....</i>	1
b)	<i>Enter database connection details using RCU Service table (STB) schema credentials.....</i>	1
c)	<i>Check / verify the component data sources .....</i>	1
d)	<i>JDBC test .....</i>	1
8.	<i>Adv configuration if required .....</i>	1
9.	<i>Config summary .....</i>	1
10.	<i>Click on create.....</i>	1
11.	<i>Next &amp; Finish.....</i>	1

1.5	<i>Configure credential MAP and KEY.....</i>	2
-----	--	---

---

# **1. Application Server Installation Guide for OPSS - CSF**

## **1.1 Introduction**

Before using CSF, you need to do Application server installation for OPSS set up.

## **1.2 Application Server Installation for OPSS – CSF**

1. Create Weblogic Domain with Oracle Enterprise Manager & Oracle JRF templates
2. Extend an existing Weblogic Domain with Oracle Enterprise Manager & Oracle JRF templates
3. Create schemas using RCU

## **1.3 Create OPSS schemas using RCU**

1. Run ./rcu from Oracle\_Home/oracle\_common/bin
2. Select Create Repository & System load and product load
3. Provide database connection details (sys/sysdba user and password)
4. Select OPSS
5. Provide schema passwords
6. Map table spaces
7. Click on Create button to complete installation.
8. Close

## **1.4 Create Weblogic domain using domain templates**

1. Select Basic Weblogic Server Domain
2. Select Oracle Enterprise Manager
3. Select Oracle JRF
  - a) [once we select Oracle JRF , tool selecting Weblogic Coherence Cluster Extension also ]
4. Select application location [select default values]
5. Select admin account
6. Select domain mode & JDK
7. Database configuration Types
  - a) Select RCU data
  - b) Enter database connection details using RCU Service table (STB) schema credentials.
  - c) Check / verify the component data sources
  - d) JDBC test
8. Adv configuration if required
9. Config summary
10. Click on create
11. Next & Finish


Refer: [http://www.oracle.com/webfolder/technetwork/tutorials/obe/fmw/wls/12c/12\\_2\\_1/02-03-002/CreateJRFEMDomain/createjrfemdomain.html#overview](http://www.oracle.com/webfolder/technetwork/tutorials/obe/fmw/wls/12c/12_2_1/02-03-002>CreateJRFEMDomain/createjrfemdomain.html#overview)

## 1.5 Configure credential MAP and KEY


2. Copy the ofsscommonscsf.jar from INSTALLER/SOURCES/LIBRARY/ofss to \$DOMAIN\_HOME/lib
3. Update the setDomainEnv.sh file (\$MW\_HOME/user\_projects/domains/mydomain/bin directory) by appending the above jar file path –

**EXTRA\_JAVA\_PROPERTIES="..... \${EXTRA\_JAVA\_PROPERTIES} -Dfcubs.csf.path=\${DOMAIN\_HOME}"**

4. Configure security via em console
5. Select Weblogic Domain -> Security -> Credentials. Click Create Map

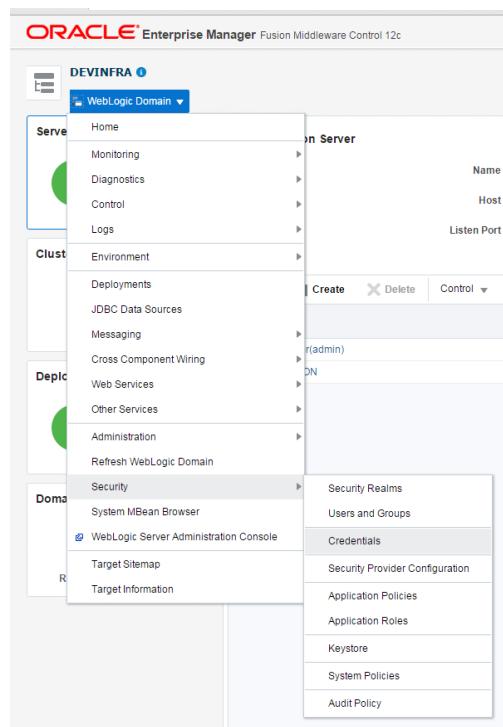

Enter the Map Name: ofss.fcubs.map  
Click OK.

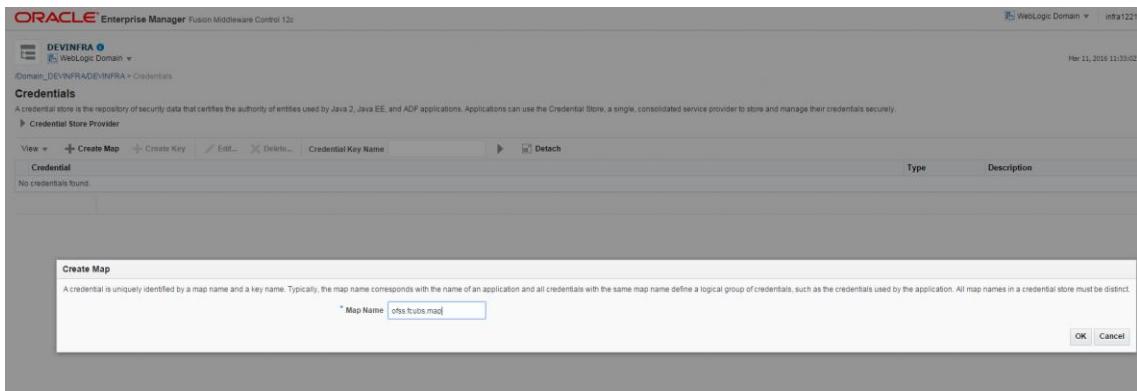

6.

7. Click Create Key button

Enter the details as below


Select Map: ofss.fcubs.map

Key: SYMMETRIC\_KEY

Type: Generic


Credentials: oraclefinancialsolutions

Click OK

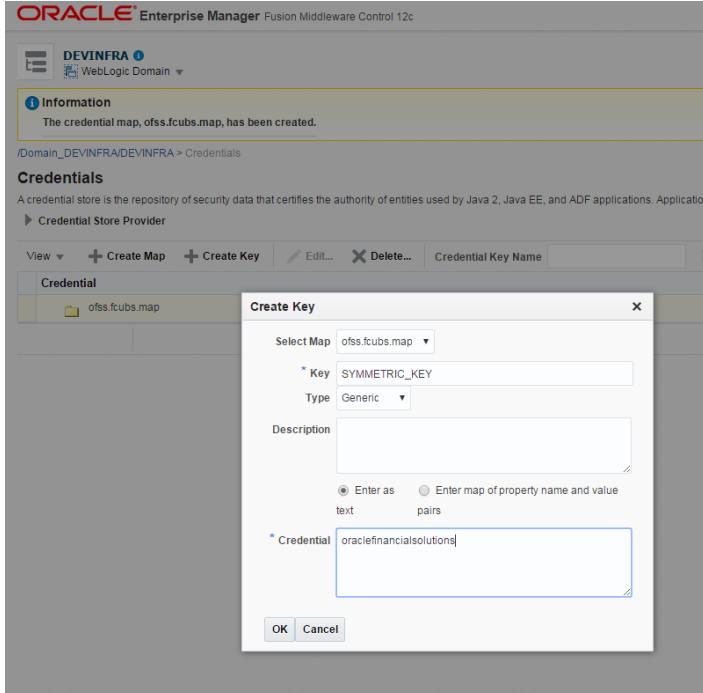


8.

9. Select Weblogic Domain -> Security -> System Policies.

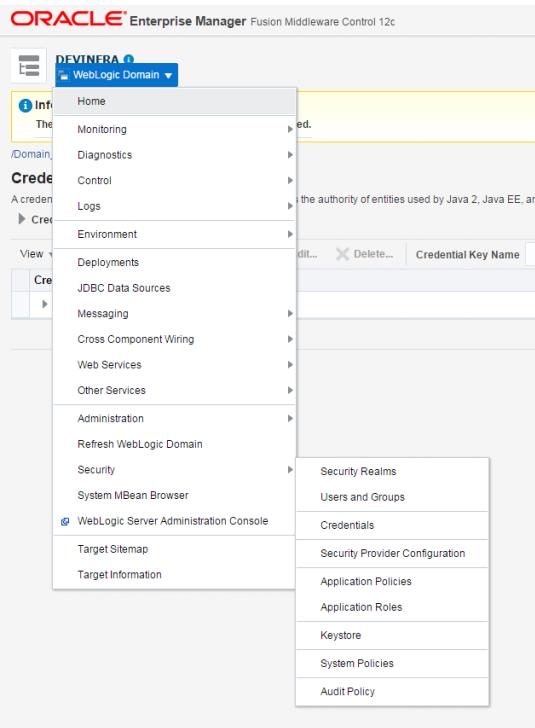

10.

## 11. Click Create

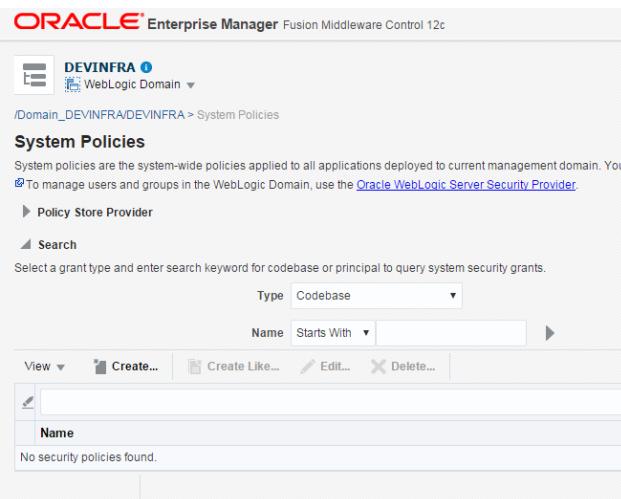

12.

## 13. Enter Codebase

ORACLE® Enterprise Manager Fusion Middleware Control 12c

DEVINfra 1 WebLogic Domain

/Domain\_DEVINfra/DEVINfra > System Policies > Create System Grant

Create System Grant

There are two different types of system policies supported by application server: principal policy and codebase policy. Principal policy grants permissions and privileges to a list of users or roles. Codebase policy grants permissions and privileges to a codebase, which is mostly URL or location of jar file in file system. Codebase can be either absolute path or relative path.

Grant To: Codebase ▾

\* Codebase

Permissions

View	Add	Edit...	Delete...	Detach
Permission Class				
No permissions added.				

OK Cancel

Mar 11, 2016 11:41:40 AM IST

14.

15. Codebase: file:\${fcubs.csf.path}/lib/fcubscommonscsf.jar

ORACLE® Enterprise Manager Fusion Middleware Control 12c

DEVINfra 1 WebLogic Domain

/Domain\_DEVINfra/DEVINfra > System Policies > Create System Grant

Create System Grant

There are two different types of system policies supported by application server: principal policy and codebase policy. Principal policy grants permissions and privileges to a list of users or roles. Codebase policy grants permissions and privileges to a codebase, which is mostly URL or location of jar file in file system. Codebase can be either absolute path or relative path.

Grant To: Codebase ▾

\* Codebase: file:\${fcubs.csf.path}/lib/fcubscommonscsf.jar

Permissions

View	Add	Edit...	Delete...	Detach
Permission Class				
No permissions added.				

16.

17. Click Add. Click “Select here to enter details for a new permission”

Permission Class: oracle.security.jps.service.credstore.CredentialAccessPermission

Resource Name: context=SYSTEM,mapName=ofss.fcubs.map,keyName=\*

Permission Actions: read

**ORACLE® Enterprise Manager** Fusion Middleware Control 12c

DEVINFRA WebLogic Domain

/Domain\_DEVINFRA/DEVINFRA > System Policies > Create System Grant

**Create System Grant**

There are two different types of system policies supported by application server: principal policy and codebase policy. Principal policy grants permissions and privileges to a list of users or roles. Codebase policy grants permissions and privileges to a list of users or roles based on absolute path or relative path.

Grant To: Codebase

\* Codebase: file \${fcubs.csf.path}/lib/fcubscommonscsf.jar

**Permissions**

**Add Permission**

Select from permissions and resources used in system policies of this domain. Enter search criteria to search for right permissions.

Search

Type: Codebase

Name:

Permission:

**Search Results**

Name	Type	Permission
No permissions found.		

Select here to enter details for a new permission

\* Permission Class: oracle.security.jps.service.credstore.CredentialAccessPermission

Resource Name: context=SYSTEM.mapName=ossfcs.map.keyName=\*

Permission Actions: read

18.

19. Click on Ok for Add Permission and System policies.

**ORACLE® Enterprise Manager** Fusion Middleware Control 12c

DEVINFRA WebLogic Domain

Mar 11, 2016 11:44:41 AM IST

**Information**

A new security grant has been added successfully.

/Domain\_DEVINFRA/DEVINFRA > System Policies

**System Policies**

System policies are the system-wide policies applied to all applications deployed to current management domain. You can grant special permissions and privileges to principal or codebase.

To manage users and groups in the WebLogic Domain, use the [Oracle WebLogic Server Security Provider](#).

Policy Store Provider

Search

Select a grant type and enter search keyword for codebase or principal to query system security grants.

Type: Codebase

Name: includes csf

**Permissions for Codebase: file:\${fcubs.csf.path}/lib/fcubscommonscsf.jar**

Resource Name	Permission Actions	Permission Class
context=SYSTEM.mapName=ossfcs.map.keyName=*	read	oracle.security.jps.service.credstore.Cred...

20.

21. Restart the servers[Admin, Managed servers]



Application Server Installation Guide for OPSS - CSF  
[May] [2017]  
Version 12.4.0.0.0

Oracle Financial Services Software Limited  
Oracle Park  
Off Western Express Highway  
Goregaon (East)  
Mumbai, Maharashtra 400 063  
India

**Worldwide Inquiries:**  
Phone: +91 22 6718 3000  
Fax:+91 22 6718 3001  
[www.oracle.com/financialservices/](http://www.oracle.com/financialservices/)

Copyright © 2007, 2017, Oracle and/or its affiliates. All rights reserved.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

**U.S. GOVERNMENT END USERS:** Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate failsafe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

This software or hardware and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.