

**ORACLE®**

PEOPLESOFT

---

# PeopleTools 8.56 Installation for DB2 for Linux, UNIX, and Windows

---

**June 2017**

**ORACLE®**

## PeopleTools 8.56 Installation

for DB2 for Linux, UNIX, and Windows

Copyright © 2017, Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

### Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

### Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

# Contents

## Preface

- About This Documentation ..... 17**
- Understanding This Documentation ..... 17
- Audience ..... 17
- Typographical Conventions ..... 18
- Products ..... 19
- Related Information ..... 20
- Comments and Suggestions ..... 20

## **Part I ..... 21**

- Mandatory Installation ..... 21

## Chapter 1

- Preparing for Installation ..... 23**
- Understanding the PeopleSoft Installation ..... 23
- Using Oracle Software Delivery Cloud to Obtain Installation Files ..... 24
- Considering Project Planning ..... 25
- Planning Your Initial Configuration ..... 25
  - Understanding Workstations ..... 26
  - Understanding PeopleSoft Servers and Clients ..... 27
  - Defining the PeopleTools Client ..... 27
  - Defining the File Server ..... 28
  - Defining the Database Server ..... 28
  - Defining the Application Server ..... 29
  - Defining the Batch Server ..... 29
  - Defining Installation Locations ..... 29
  - Defining the Web Server ..... 32
  - Using Laser Printers ..... 33
- Planning Database Creation ..... 33
  - Understanding Database Creation ..... 33
  - Determining Databases and Database Names ..... 33
  - Defining DB2 for Linux, UNIX, and Windows, and PeopleSoft Databases ..... 34
- Planning Multilingual Strategy ..... 34
  - Understanding Multilingual Issues ..... 34

Choosing a Base Language .....	36
Selecting Additional Languages .....	38
Selecting a Database Character Set .....	38
Preparing for the PeopleTools-Only Upgrade .....	39
Understanding the PeopleTools Only Upgrade .....	39
Reviewing the Upgrade Documentation .....	39
Shutting Down Servers .....	39
Reviewing Customized Configuration Files .....	39
Reviewing Patches and Updates Required at Installation .....	40
Creating PeopleSoft User IDs .....	41
Understanding PeopleSoft User ID Creation .....	41
Prerequisite .....	41
Creating UNIX User IDs .....	41
Creating Windows User IDs .....	42
Installing the Database Engine .....	43
Configuring DB2 UDB for Linux, UNIX, and Windows for Remote Client Access .....	44
Installing Supporting Applications .....	45
Performing Backups .....	46
Using PeopleSoft Change Assistant and PeopleSoft Change Impact Analyzer .....	47

## Chapter 2

<b>Installing Web Server Products .....</b>	<b>49</b>
Installing Oracle WebLogic Server .....	49
Understanding the Oracle WebLogic Installation .....	49
Reviewing Troubleshooting Tips .....	50
Obtaining Oracle WebLogic Installation Files from Oracle Software Delivery Cloud .....	51
Installing JDK .....	52
Installing Oracle WebLogic on Microsoft Windows .....	54
Installing Oracle WebLogic on Linux or UNIX in Silent Mode .....	64
Configuring JDK for Daylight Savings Time Change .....	67
Removing the Oracle WebLogic Installation on Microsoft Windows .....	68
Removing the Oracle WebLogic Installation on Linux or UNIX .....	72
Installing IBM WebSphere Application Server .....	73
Understanding IBM WebSphere Installation .....	74
Prerequisites .....	74
Obtaining IBM WebSphere Installation Files .....	75
Installing IBM WebSphere 9.0.0.0 ND .....	75
Installing IBM HTTP Server 9.0.0.0 .....	75
Installing IBM WebSphere Plug-ins 9.0.0.0 .....	75

**Chapter 3**

<b>Installing Additional Components .....</b>	<b>77</b>
Reviewing Additional Components .....	77
Installing Oracle Tuxedo .....	78
Understanding Oracle Tuxedo .....	78
Prerequisites .....	79
Debugging the Oracle Tuxedo Installer .....	80
Obtaining the Oracle Tuxedo Installation Files from Oracle Software Delivery Cloud .....	80
Obtaining the Oracle Tuxedo Patches from My Oracle Support .....	81
Removing Existing Oracle Tuxedo Installations from Microsoft Windows (Optional) .....	82
Designating the Application Server Administrator on Microsoft Windows .....	83
Installing Oracle Tuxedo on Microsoft Windows in GUI Mode .....	84
Installing the Oracle Tuxedo Patch on Microsoft Windows .....	100
Installing Oracle Tuxedo on Microsoft Windows in Silent Mode .....	102
Uninstalling the Oracle Tuxedo Patch on Microsoft Windows .....	103
Uninstalling Oracle Tuxedo in GUI Mode .....	104
Checking the Windows Service Account .....	105
Restricting Domain Process Privileges .....	106
Setting Up the Windows Services for Oracle Tuxedo .....	107
Verifying the Server Installation on Microsoft Windows .....	109
Removing Existing Oracle Tuxedo Installations from UNIX (Optional) .....	110
Completing the Preinstallation Checklist on UNIX .....	110
Designating the Oracle Tuxedo Owner on UNIX .....	111
Installing Oracle Tuxedo in Silent Mode on UNIX .....	112
Installing the Oracle Tuxedo Patch on UNIX .....	114
Uninstalling the Oracle Tuxedo Patch from UNIX .....	114
Uninstalling Oracle Tuxedo from UNIX Using Silent Mode .....	115
Verifying the Server Installation on UNIX .....	115
Ensuring that Oracle Tuxedo Coexists with Earlier Versions .....	115

**Chapter 4**

<b>Using the PeopleSoft Installer .....</b>	<b>119</b>
Understanding the PeopleSoft Installer .....	119
Defining the PeopleSoft Installer .....	119
Defining Supported Server Combinations .....	120
Prerequisites .....	120
Obtaining the PeopleSoft Installation Files from Oracle Software Delivery Cloud .....	121
Running the PeopleSoft Installer .....	123
Understanding the PeopleSoft Installer .....	123

Starting the PeopleSoft Installer .....	124
Installing PeopleSoft PeopleTools in GUI Mode .....	125
Installing PeopleSoft PeopleTools in Console Mode .....	137
Verifying Necessary Files for Installation on Windows .....	141
Installing PeopleSoft Application Software .....	142
Installing the PeopleTools Client Files .....	142
Installing the PeopleTools Client Files Using the PeopleSoft Installer .....	142
Installing the PeopleTools Client Files in Silent Mode .....	143
Mapping a Drive on the Install Workstation .....	144

**Chapter 5**

<b>Setting Up the Install Workstation .....</b>	<b>145</b>
Understanding the Install Workstation .....	145
Prerequisites .....	145
Starting Configuration Manager .....	146
Setting Startup Options .....	146
Editing the Default Profile .....	147
Running Client Setup .....	149

**Chapter 6A**

<b>Creating a Database Manually on Microsoft Windows or UNIX .....</b>	<b>151</b>
Understanding Database Creation .....	151
Determining Tablespace Strategy for Demo Database .....	152
Editing SQL Scripts .....	152
Understanding SQL Scripts .....	153
Editing CREATEDB-95.SQL or CREATEDBU.SQL .....	153
Executing DB2SET Command to Set Proper Decimal Scale .....	159
Editing ALTRDB.SQL .....	160
Editing CREATEBPU.SQL for Unicode .....	160
Editing XXDDLMS.SQL or XXDDLMSU.SQL .....	160
Editing DBOWNER.SQL .....	161
Editing PSADMIN.SQL .....	162
Running SQL Scripts .....	162
Configuring and Testing Database Connectivity for DB2 Connect or DB2 Client V9.x or Earlier .....	164
Configuring Database Connectivity for DB2 Connect or DB2 Client V9.x or Earlier .....	164
Testing Client Connectivity for DB2 Connect or DB2 Client V9.x or Earlier .....	171
Configuring and Testing Connectivity for DB2 Connect and DB2 Client V10.x or Later .....	173
Configuring Database Connectivity for DB2 Connect and DB2 Client V10.x or Later .....	173
Testing Database Connectivity for DB2 Connect and DB2 Client V10.x or Later .....	174
Configuring an ODBC Data Source for Connectivity on Microsoft Windows .....	174

Creating Data Mover Import Scripts .....	175
Understanding Data Mover Import Scripts .....	175
Working with Multilingual Databases .....	176
Running Database Setup to Create Data Mover Import Scripts .....	176
Running Data Mover Import Scripts .....	183
Understanding Data Mover Import Scripts .....	183
Populating Tables in the PeopleSoft Database .....	183
Checking the Log Files and Troubleshooting .....	184
Checking the Log Files .....	184
Running Data Mover .....	184
Troubleshooting .....	185
Improving Performance .....	186
Changing the Base Language .....	187
<b>Chapter 6B</b>	
<b>Creating a Database on UNIX .....</b>	<b>189</b>
Understanding the Database Configuration Wizard .....	189
Fulfilling PeopleSoft Database Configuration Wizard Prerequisites .....	189
Installing the PeopleSoft Database Server Components on the Database Server .....	190
Completing Registry Settings .....	190
Rebinding of Packages Requirement .....	191
Completing Required CLI Settings in the DB2CLI.INI File .....	191
Defining Database Manager Configuration .....	191
Defining Database Configuration .....	191
Running the Shell Script psconfig.sh .....	192
Running the Database Configuration Wizard .....	192
Changing the Location of the DB2/LUW Database Log Files .....	200
Checking the Log Files and Troubleshooting .....	201
Checking the Log Files .....	201
Running Data Mover .....	201
Troubleshooting .....	203
Improving Performance .....	205
<b>Chapter 7</b>	
<b>Completing the Database Setup .....</b>	<b>207</b>
Selecting the Necessary Tasks to Complete the Database Setup .....	207
Reviewing Patch Application .....	207
Updating Database to Latest PeopleTools Release .....	208
Understanding Database Updates .....	208
Cleaning Up Data .....	209

Deleting Object Permission Data .....	209
Deleting Performance Monitor System Default Data .....	209
Creating the PSIMAGE2, PSIMAGE2IDX, and PSIMAG2LOB Tablespaces .....	210
Updating PeopleTools System Tables .....	210
Updating Select PeopleTools Database Objects .....	213
Deleting Select PeopleTools Database Objects .....	215
Updating Select PeopleTools Patch Database Objects .....	217
Merging the PeopleTools Projects .....	217
Altering PeopleTools Tables .....	218
Updating PeopleTools Database Objects .....	221
Deleting Obsolete PeopleTools Database Objects .....	223
Applying Patched PeopleTools Database Objects .....	225
Migrating Records to New Tablespaces .....	225
Updating PeopleTools System Data .....	231
Running PeopleTools Conversions .....	235
Converting Integration Broker .....	240
Running Additional PeopleTools Conversions .....	242
Running Additional Data Mover Scripts .....	242
Cleaning Up Orphaned Language Data .....	242
Running VERSION Application Engine Program .....	243
Running SQR Reports .....	243
Understanding Running SQR Reports .....	243
Binding the dbcalls.bnd .....	243
Running SQRs on the Client Workstation .....	244
Creating a Shortcut to Run SQRs .....	246
Checking the Database .....	247
Running SETSPACE.SQR .....	247
Running Alter Audit .....	249

**Chapter 8A**

<b>Configuring the Application Server on Windows .....</b>	<b>255</b>
Understanding the Application Server .....	255
Prerequisites .....	256
Creating a Wallet for the SSL/TLS Setup .....	257
Using the Delivered Wallet .....	257
Creating a Wallet with OpenSSL .....	257
Preparing the Application Server File System for a PeopleTools-Only Upgrade .....	261
Setting Up COBOL for Remote Call .....	261
Verifying Database Connectivity .....	261
Creating, Configuring, and Starting an Initial Application Server Domain .....	262
Creating, Configuring, and Starting the Application Server Domain .....	262



Testing the Three-Tier Connection .....	267
Importing an Existing Application Server Domain Configuration .....	268
Setting Up a Custom Application Server Domain Configuration .....	271
Troubleshooting Common Errors .....	273

## Chapter 8B

<b>Configuring the Application Server on UNIX .....</b>	<b>275</b>
Understanding the Application Server .....	275
Understanding the Application Server Domain Processes .....	276
Prerequisites .....	276
Creating a Wallet for the SSL/TLS Setup .....	277
Using the Delivered Wallet .....	277
Creating a Wallet with OpenSSL .....	277
Preparing the Application Server File System for a PeopleTools-Only Upgrade .....	281
Setting Environment Variables .....	281
Setting Up COBOL for Remote Call .....	282
Verifying Database Connectivity .....	282
Creating, Configuring, and Starting an Initial Application Server Domain .....	283
Creating, Configuring, and Starting the Application Server Domain .....	283
Testing the Three-Tier Connection .....	288
Importing an Existing Application Server Domain Configuration .....	289
Setting Up a Custom Application Server Domain Configuration .....	292
Troubleshooting Common Errors .....	294

## Chapter 9A

<b>Setting Up the PeopleSoft Pure Internet Architecture in GUI Mode .....</b>	<b>295</b>
Understanding PeopleSoft Pure Internet Architecture .....	295
Using Authentication Domains in the PeopleSoft Pure Internet Architecture Installation .....	297
Preparing the PeopleSoft Pure Internet Architecture File System for a PeopleTools-Only Upgrade .....	298
Installing the PeopleSoft Pure Internet Architecture on Oracle WebLogic in GUI Mode .....	298
Prerequisites .....	299
Installing the PeopleSoft Pure Internet Architecture on a New Oracle WebLogic Domain .....	299
Installing the PeopleSoft Pure Internet Architecture on an Existing Oracle WebLogic Domain .....	315
Uninstalling the PeopleSoft Pure Internet Architecture on Oracle WebLogic .....	331
Installing the PeopleSoft Pure Internet Architecture on IBM WebSphere in GUI Mode .....	331
Prerequisites .....	332
Installing the PeopleSoft Pure Internet Architecture on IBM WebSphere .....	332
Uninstalling the PeopleSoft Pure Internet Architecture from IBM WebSphere .....	351
Configuring the SSL/TLS Port for JSL .....	352
Testing and Administering the PeopleSoft Pure Internet Architecture Installation .....	353

Verifying the PeopleSoft Pure Internet Architecture Installation ..... 353

Starting and Stopping Oracle WebLogic ..... 353

Starting and Stopping IBM WebSphere Application Servers ..... 355

Using PSADMIN to Start and Stop Web Servers ..... 358

Accessing the PeopleSoft Signon ..... 360

Completing Post-Installation Steps ..... 362

    Using Fluid User Interface ..... 362

    Setting Options for Multilingual Databases ..... 365

    Updating PeopleTools Options ..... 366

    Updating Time Zone Information ..... 366

    Updating Database Information ..... 367

**Chapter 9B**

**Setting Up the PeopleSoft Pure Internet Architecture in Console Mode ..... 369**

Understanding PeopleSoft Pure Internet Architecture ..... 369

Using Authentication Domains in the PeopleSoft Pure Internet Architecture Installation ..... 371

Preparing the PeopleSoft Pure Internet Architecture File System for a PeopleTools-Only Upgrade ..... 372

Installing the PeopleSoft Pure Internet Architecture on Oracle WebLogic in Console Mode ..... 372

    Prerequisites ..... 373

    Installing the PeopleSoft Pure Internet Architecture on a New Oracle WebLogic Domain in Console Mode .  
373

    Installing the PeopleSoft Pure Internet Architecture on an Existing Oracle WebLogic Domain in Console  
Mode ..... 378

    Uninstalling the PeopleSoft Pure Internet Architecture from Oracle WebLogic ..... 384

Installing the PeopleSoft Pure Internet Architecture on IBM WebSphere in Console Mode ..... 384

    Prerequisites ..... 384

    Installing the PeopleSoft Pure Internet Architecture on IBM WebSphere Application Server ND ..... 385

    Uninstalling the PeopleSoft Pure Internet Architecture from IBM WebSphere ..... 389

Installing the PeopleSoft Pure Internet Architecture in Silent Mode ..... 390

    Understanding the Silent Installation and the Response File ..... 390

    Editing the Response File ..... 390

    Running the Silent Mode Installation ..... 393

Configuring the SSL/TLS Port for JSL ..... 393

Testing and Administering the PeopleSoft Pure Internet Architecture Installation ..... 394

    Verifying the PeopleSoft Pure Internet Architecture Installation ..... 394

    Starting and Stopping Oracle WebLogic ..... 394

    Starting and Stopping IBM WebSphere Application Servers ..... 395

    Using PSADMIN to Start and Stop Web Servers ..... 398

    Accessing the PeopleSoft Signon ..... 400

Completing Post-Installation Steps ..... 402

    Using Fluid User Interface ..... 402

    Setting Options for Multilingual Databases ..... 405

Updating PeopleTools Options .....	406
Updating Time Zone Information .....	406
Updating Database Information .....	407
<b>Chapter 10A</b>	
<b>Setting Up Process Scheduler on Windows .....</b>	<b>409</b>
Prerequisites .....	409
Preparing the Process Scheduler File System for a PeopleTools-Only Upgrade .....	410
Setting Up Process Scheduler Security .....	410
Understanding Process Scheduler Security .....	410
Changing User Account to Start ORACLE ProcMGR V12.2.2.0.0_VS2015 .....	411
Granting Process Scheduler Administrative Rights .....	413
Setting Up Process Scheduler to Transfer Reports and Logs to the Report Repository .....	414
Understanding Report Distribution .....	415
Setting Up Single Signon to Navigate from PIA to Report Repository .....	417
Determining the Transfer Protocol .....	417
Starting the Distribution Agent .....	418
Setting Up the Report Repository .....	418
Setting Up the Distribution for Your Process Scheduler Server .....	435
Setting Up Sending and Receiving of Report Folders in the Report Manager .....	436
Setting Environment Variables .....	436
Setting Up Process Scheduler Server Agent .....	436
Understanding Process Scheduler Server Agent .....	437
Creating and Configuring a Process Scheduler Server .....	437
Reconfiguring a Process Scheduler Server .....	442
Verifying the Process Scheduler Server Status .....	444
Starting Process Scheduler as a Windows Service (Optional) .....	445
Configuring the Process Scheduler for Microsoft Word (Optional) .....	448
Configuring Process Scheduler .....	448
Executing Winword on Mapped Drive .....	450
Configuring Setup Manager .....	451
Installing Products for PS/nVision .....	452
Understanding the PS/nVision Setup .....	453
Installing Products for PS/nVision in Excel Automation Mode .....	453
Installing Microsoft .NET Framework 4.6.1 .....	453
Installing Microsoft Open XML SDK for PS/nVision .....	454
<b>Chapter 10B</b>	
<b>Setting Up Process Scheduler on UNIX .....</b>	<b>459</b>
Prerequisites .....	459

Preparing the Process Scheduler File System for a PeopleTools-Only Upgrade .....	460
Setting Up Process Scheduler Security .....	460
Understanding Process Scheduler Security .....	460
Granting Process Scheduler Administrative Rights .....	461
Setting Up Process Scheduler to Transfer Reports and Logs to the Report Repository .....	462
Understanding Report Distribution .....	462
Setting Up Single Signon to Navigate from PIA to Report Repository .....	464
Determining the Transfer Protocol .....	464
Starting the Distribution Agent .....	465
Setting Up the Report Repository .....	465
Setting Up the Distribution for Your Process Scheduler Server .....	480
Setting Up Sending and Receiving of Report Folders in the Report Manager .....	481
Setting Up Process Scheduler Server Agent .....	481
Understanding Process Scheduler Server Agent .....	481
Changing the Default Operating System .....	482
Setting Up Your Environment .....	482
Creating and Configuring a Process Scheduler Server .....	483
Reconfiguring a Process Scheduler Server .....	488
Verifying the Process Scheduler Server Status .....	490
<b>Part II .....</b>	<b>493</b>
Discretionary Installation .....	493
<b>Chapter 11A</b>	
<b>Installing and Compiling COBOL on Windows .....</b>	<b>495</b>
Understanding COBOL .....	495
Prerequisites .....	495
Preparing COBOL for a PeopleTools-only Upgrade .....	496
Installing Micro Focus Net Express on Microsoft Windows .....	496
Prerequisites .....	496
Obtaining Installation Files for Micro Focus Net Express from Oracle Software Delivery Cloud .....	497
Installing Micro Focus Net Express Wrap Pack 6 .....	497
Installing Micro Focus Net Express Wrap Pack 14 .....	509
Managing Micro Focus Net Express Compiler Licenses .....	514
Understanding Micro Focus Net Express Compiler Licenses .....	514
Configuring a Full License with the License Server .....	515
Configuring a Timed License with the License Server .....	525
Revoking the License Using the License Management System .....	532
Revoking the License by Removing the Installation .....	534
Using the Micro Focus COBOL Compiler on Microsoft Windows .....	536

Understanding COBOL Compilation .....	537
Compiling COBOL on Microsoft Windows with a PS_HOME Setup .....	538
Compiling COBOL on Microsoft Windows with a PS_APP_HOME Setup .....	541
Compiling COBOL on Microsoft Windows with a PS_CUST_HOME Setup .....	545
Recompiling COBOL on Microsoft Windows .....	550
Setting Up the Micro Focus Net Express Runtime .....	551
Defining the GNT and INT Files .....	553
Distributing COBOL Binaries .....	553
<b>Chapter 11B</b>	
<b>Installing and Compiling COBOL on UNIX .....</b>	<b>555</b>
Understanding COBOL .....	555
Prerequisites .....	556
Preparing COBOL for a PeopleTools-only Upgrade .....	556
Installing Micro Focus Server Express for UNIX and Linux .....	556
Understanding Micro Focus Server Express .....	556
Prerequisites .....	557
Obtaining the Installation Files for Micro Focus Server Express from Oracle Software Delivery Cloud .....	558
Installing Micro Focus Server Express .....	558
Using the Micro Focus COBOL Compiler on UNIX .....	564
Understanding COBOL Compilation .....	564
Setting Environment Variables .....	565
Modifying the Liblist64 File (IBM AIX) .....	566
Compiling COBOL on UNIX with a PS_HOME Setup .....	566
Compiling COBOL on UNIX with a PS_APP_HOME Setup .....	567
Compiling COBOL on UNIX with a PS_CUST_HOME Setup .....	568
Linking COBOL .....	569
Recompiling COBOL on UNIX .....	570
Installing IBM COBOL on IBM AIX .....	571
Understanding the IBM COBOL for AIX Installation .....	571
Prerequisites .....	571
Installing IBM COBOL for AIX v4.1.1.1 .....	572
Using the IBM COBOL Compiler on IBM AIX .....	574
Setting Environment Variables for IBM COBOL .....	574
Compiling COBOL on AIX with a PS_HOME Setup .....	575
Compiling COBOL on AIX with a PS_APP_HOME Setup .....	576
Compiling COBOL on AIX with a PS_CUST_HOME Setup .....	577
Troubleshooting the IBM COBOL Compiler .....	579
Setting Up the IBM COBOL Runtime .....	582
Removing the IBM COBOL Installation .....	586

**Chapter 12**

**Installing PeopleSoft Change Assistant ..... 591**  
 Understanding PeopleSoft Change Assistant ..... 591  
 Removing or Upgrading PeopleSoft Change Assistant Installations ..... 592  
     Removing PeopleSoft Change Assistant Installations from Previous Releases ..... 592  
     Removing PeopleSoft Change Assistant Instances in the Current Release ..... 592  
     Upgrading PeopleSoft Change Assistant Instances ..... 596  
 Installing PeopleSoft Change Assistant in GUI Mode ..... 600  
 Installing PeopleSoft Change Assistant in Silent Mode ..... 607  
     Understanding Silent Mode for PeopleSoft Change Assistant ..... 608  
     Using the Silent Mode Script ..... 608  
 Configuring and Using PeopleSoft Change Assistant ..... 609  
     Verifying the Path Variable ..... 609  
     Specifying Options ..... 609  
     Scanning the Workstation ..... 610  
     Exporting Jobs to XML, HTML, or Microsoft Excel Format ..... 610  
 Validating Change Assistant Settings ..... 610

**Chapter 13**

**Installing PeopleSoft Change Impact Analyzer ..... 613**  
 Prerequisites ..... 613  
 Removing PeopleSoft Change Impact Analyzer Installations ..... 613  
 Installing PeopleSoft Change Impact Analyzer ..... 616  
 Installing and Removing PeopleSoft Change Impact Analyzer in Silent Mode ..... 622  
     Understanding Silent Mode for PeopleSoft Change Impact Analyzer ..... 622  
     Installing PeopleSoft Change Impact Analyzer in Silent Mode ..... 623  
     Removing the PeopleSoft Change Impact Analyzer Installation in Silent Mode ..... 624  
     Removing and Installing PeopleSoft Change Impact Analyzer in Silent Mode ..... 624

**Chapter 14**

**Adding New Product Modules ..... 627**  
 Adding New Modules to PeopleSoft 8.4 Installations ..... 627

**Chapter 15**

**Installing the PeopleSoft Online Help Solution ..... 629**  
 Understanding PeopleSoft Online Help (PeopleBooks) ..... 629  
 Using the PeopleSoft Online Help Web Site for Context-Sensitive Help ..... 630

Understanding the PeopleSoft Online Help Web Site ..... 630

Setting Up Context-Sensitive Help with the PeopleSoft Online Help Web Site ..... 630

Setting Up F1 Help with the PeopleSoft Online Help Web Site ..... 633

Configuring Context-Sensitive Help with Local Installations ..... 633

Enabling the Help Link from the Application Pages with Local Installations ..... 633

Enabling F1 Help with Local Installations ..... 634

Creating the Help Index for Multi-Product Installations ..... 634

**Chapter 16**

**Installing Software for PS/nVision Drilldowns ..... 637**

Understanding PS/nVision DrillDown Add-ins ..... 637

Installing the DrillToPIA Add-In ..... 638

    Understanding Drilldown with DrillToPIA Add-in ..... 638

    Installing the DrillToPIA Add-in on the Microsoft Excel Environment ..... 638

Installing the nVisionDrill Add-In ..... 639

    Understanding PS/nVision DrillDown Using Web Services ..... 639

    Understanding Security for DrillDown Using nVisionDrill VSTO Add-in ..... 639

    Installing the nVisionDrill Add-in for Microsoft Excel ..... 639

Installing the nVisionDrill Add-Ins for Multi-Language Installations ..... 640

Setting Up PeopleSoft Integration Broker for Using Web Service Capability with nVisionDrill Add-in ..... 640

**Chapter 17**

**Installing the Web Application Deployment Tool ..... 645**

Prerequisites ..... 645

Installing the Web Application Deployment Tool on Oracle WebLogic in GUI Mode ..... 646

Installing the Web Application Deployment Tool on IBM WebSphere in GUI Mode ..... 659

Installing the Web Application Deployment Tool on Oracle WebLogic in Console Mode ..... 671

Installing the Web Application Deployment Tool on IBM WebSphere in Console Mode ..... 675

Installing the Web Application Deployment Tool in Silent Mode ..... 679

    Understanding the Web Application Deployment Tool Silent Mode Installation and the Response File .... 679

    Editing the Web Application Deployment Tool Response File to Deploy DES ..... 680

    Running the Web Application Deployment Tool Silent Mode Installation to Deploy DES ..... 681

Testing and Troubleshooting the Web Application Deployment ..... 682

**Appendix A**

**Describing Debugger Requirements ..... 683**

Describing Debugger Requirements for the AIX Operating System ..... 683

Describing Debugger Requirements for the HP-UX Operating System ..... 683

Describing Debugger Requirements for the Linux Operating System ..... 683

Describing Debugger Requirements for the Oracle Solaris Operating System ..... 684

**Appendix B**

**Relinking SQR on UNIX ..... 685**  
Understanding SQR Relinking ..... 685  
Relinking SQR on UNIX ..... 685  
Relinking SQR on Oracle Solaris ..... 686



# About This Documentation

This preface discusses:

- Understanding This Documentation
- Audience
- Typographical Conventions
- Products
- Related Information
- Comments and Suggestions

## Understanding This Documentation

---

This documentation is designed to direct you through a basic PeopleSoft installation. It is not a substitute for the database administration documentation provided by your relational database management system (RDBMS) vendor, the network administration documentation provided by your network vendor, or the installation and configuration documentation for additional software components that are used with PeopleSoft products.

This documentation is divided into two parts. The chapters in Part 1 include the information that is required to complete a basic PeopleSoft installation. The chapters and appendices in Part 2 include information for less common or optional tasks.

Required updates to this installation documentation are provided in the form of "Required for Install" incidents, which are available on My Oracle Support. In addition, addenda to the recent PeopleTools installation guides are periodically posted in My Oracle Support on the same page as the initial posting.

This documentation includes the instructions for installing Oracle's PeopleSoft PeopleTools and PeopleSoft applications. You also need the installation instructions that are specific to your PeopleSoft application, which are provided in a separate document for the PeopleSoft application. For instance, if you are installing Oracle's PeopleSoft Customer Relationship Management (CRM), you need both this installation guide and the additional instructions provided for installing PeopleSoft CRM.

To find the installation documentation for PeopleSoft PeopleTools or for your PeopleSoft application, go to My Oracle Support and search for the installation guide for your product and release.

---

**Note.** Before proceeding with your installation, check My Oracle Support to ensure that you have the latest version of this installation guide for the correct release of the PeopleSoft product that you are installing.

---

## Audience

---

This documentation is written for the individuals responsible for installing and administering the PeopleSoft environment. This documentation assumes that you have a basic understanding of the PeopleSoft system. One of the most important components in the installation and maintenance of your PeopleSoft system is your on-site expertise.

You should be familiar with your operating environment and RDBMS and have the necessary skills to support that environment. You should also have a working knowledge of:

- SQL and SQL command syntax.

- PeopleSoft system navigation.
- PeopleSoft windows, menus, and pages, and how to modify them.
- Microsoft Windows.

Oracle recommends that you complete training, particularly a PeopleSoft Server Administration and Installation course, before performing an installation.

See Oracle University, <http://education.oracle.com>.

## Typographical Conventions

To help you locate and understand information easily, the following conventions are used in this documentation:

Convention	Description
Monospace	Indicates a PeopleCode program or other code, such as scripts that you run during the install. Monospace is also used for messages that you may receive during the install process.
<i>Italics</i>	Indicates field values, emphasis, and book-length publication titles. Italics is also used to refer to words as words or letters as letters, as in the following example:  Enter the letter <i>O</i> .  Italics are also used to indicate user-supplied information. For example, the term <i>domain</i> is used as a placeholder for the actual domain name in the user's environment. When two such placeholders are used together, they may be set apart with angle brackets. For example, the path <code>&lt;PS_CFG_HOME&gt;/appserv/&lt;domain&gt;</code> includes two placeholders that require user-supplied information.
Initial Caps	Field names, commands, and processes are represented as they appear on the window, menu, or page.
lower case	File or directory names are represented in lower case, unless they appear otherwise on the interface.
Menu, Page	A comma (,) between menu and page references indicates that the page exists on the menu. For example, "Select Use, Process Definitions" indicates that you can select the Process Definitions page from the Use menu.
Cross-references	Cross-references that begin with <i>See</i> refer you to additional documentation that will help you implement the task at hand. We highly recommend that you reference this documentation.  Cross-references under the heading <i>See Also</i> refer you to additional documentation that has more information regarding the subject.

Convention	Description
⇒ (line-continuation arrow)	A line-continuation arrow inserted at the end of a line of code indicates that the line of code has been wrapped at the page margin. The code should be viewed or entered as a continuous line of code, without the line-continuation arrow.
" " (quotation marks)	Indicate chapter titles in cross-references and words that are used differently from their intended meaning.
<b>Note.</b> Note text.	Text that begins with <i>Note</i> . indicates information that you should pay particular attention to as you work with your PeopleSoft system.
<b>Important!</b> Important note text.	A note that begins with <i>Important!</i> is crucial and includes information about what you need to do for the system to function properly.
<b>Warning!</b> Warning text.	A note that begins with <i>Warning!</i> contains critical configuration information or implementation considerations; for example, if there is a chance of losing or corrupting data. Pay close attention to warning messages.

## Products

---

This documentation may refer to these products and product families:

- Oracle® BPEL Process Manager
- Oracle® Enterprise Manager
- Oracle® Tuxedo
- Oracle® WebLogic Server
- Oracle's PeopleSoft Application Designer
- Oracle's PeopleSoft Change Assistant
- Oracle's PeopleSoft Change Impact Analyzer
- Oracle's PeopleSoft Data Mover
- Oracle's PeopleSoft Process Scheduler
- Oracle's PeopleSoft Pure Internet Architecture
- Oracle's PeopleSoft Customer Relationship Management
- Oracle's PeopleSoft Enterprise Learning Management
- Oracle's PeopleSoft Enterprise Performance Management
- Oracle's PeopleSoft Financial Management
- Oracle's PeopleSoft Human Capital Management
- Oracle's PeopleSoft Interaction Hub
- Oracle's PeopleSoft Pay/Bill Management
- Oracle's PeopleSoft PeopleTools

- Oracle's PeopleSoft Staffing Front Office
- Oracle's PeopleSoft Supply Chain Management

See the Products area on the Oracle web site, <http://www.oracle.com/us/products/product-list/products-a-z/index.html>.

## Related Information

---

Oracle provides reference information about PeopleSoft PeopleTools and your particular PeopleSoft Application. You can access documentation for recent releases of PeopleSoft PeopleTools and PeopleSoft Applications at the PeopleSoft Hosted Documentation site. You can also find documentation by searching for the product name on My Oracle Support.

- My Oracle Support. This support platform requires a user account to log in. Contact your PeopleSoft representative for information.

To locate documentation on My Oracle Support, search for the title and select PeopleSoft Enterprise to refine the search results.

See My Oracle Support, <https://support.oracle.com>.

- *PeopleTools: Getting Started with PeopleTools* for your release. This documentation provides a high-level introduction to PeopleTools technology and usage.

See Oracle PeopleSoft Online Help, <http://www.peoplesoftonlinehelp.com>.

- PeopleSoft Application Fundamentals for your PeopleSoft Application and release. This documentation provides essential information about the setup, design, and implementation of your PeopleSoft Application.

To install additional component software products for use with PeopleSoft products, including those products that are packaged with your PeopleSoft products as well as products from other vendors, you should refer to the documentation provided with those products, as well as this documentation. For those additional components that are offered by Oracle, such as Oracle Middleware products, see the documentation on the Oracle Help Center.

## See Also

Oracle Help Center, <https://docs.oracle.com/en/>

## Comments and Suggestions

---

Your comments are important to us. We encourage you to tell us what you like, or what you would like changed about PeopleSoft documentation and other Oracle reference and training materials. Please send your suggestions to:

PSOFT-Infodev\_US@oracle.com

While we cannot guarantee to answer every email message, we will pay careful attention to your comments and suggestions. We are always improving our product communications for you.

# Part I

## **Mandatory Installation**

---

The chapters in the first part of this installation guide cover only those tasks that are required for a basic PeopleSoft installation. Everyone carrying out an installation should use the tasks in Part I. After setting up the Application Server, PeopleSoft Pure Internet Architecture, and Process Scheduler Server, you verify that you can sign into the PeopleSoft installation in a browser.



## Chapter 1

# Preparing for Installation

This chapter discusses:

- Understanding the PeopleSoft Installation
- Using Oracle Software Delivery Cloud to Obtain Installation Files
- Considering Project Planning
- Planning Your Initial Configuration
- Planning Database Creation
- Planning Multilingual Strategy
- Preparing for the PeopleTools-Only Upgrade
- Reviewing Patches and Updates Required at Installation
- Creating PeopleSoft User IDs
- Installing the Database Engine
- Configuring DB2 UDB for Linux, UNIX, and Windows for Remote Client Access
- Installing Supporting Applications
- Performing Backups
- Using PeopleSoft Change Assistant and PeopleSoft Change Impact Analyzer

## Understanding the PeopleSoft Installation

---

This chapter will help you plan and prepare for a basic PeopleSoft installation. Before you begin the installation, please note:

- Before you begin your PeopleSoft installation, use the PeopleSoft hardware and software requirements information in the My Oracle Support Certifications area to verify that you have the correct hardware and software in place to support a successful installation. In addition to the information in the Certifications area, review the application-specific hardware and software documentation available on My Oracle Support.

See hardware and software requirements for PeopleSoft PeopleTools and your PeopleSoft application on My Oracle Support.

See My Oracle Support, Certifications.

---

**Warning!** If you are unable to meet any of the criteria outlined in the hardware and software requirements and certification information on My Oracle Support, contact Oracle before going forward with the installation. Attempting to complete an installation on an unsupported configuration can be a very costly decision, and Oracle will not provide support for such PeopleSoft installations.

---

- Use the My Oracle Support Certifications area to determine the latest certified versions of additional

components, such as Oracle Tuxedo or IBM WebSphere, which are supported for the PeopleSoft PeopleTools release you are installing.

- If you will be upgrading your current release after you perform this installation, you also need to install Change Assistant. The page on My Oracle Support containing your upgrade documentation and files includes information on which tool you need.
- For critical issues related to the installation process, see the My Oracle Support web site. Be sure to read the "Required for Installation or Upgrade" incidents on the Patches and Updates page for the PeopleSoft PeopleTools version that you are installing.
- For online technical support information, use the My Oracle Support web site. My Oracle Support includes tools for self-directed searches of information including reference documents and problem resolutions, as well as service request management tools.

See My Oracle Support, <https://support.oracle.com>.

- To download software and documentation, use the Oracle Software Delivery Cloud portal, and the Oracle Technology Network.

See Oracle Software Delivery Cloud, <http://edelivery.oracle.com>.

See Oracle Technology Network, <http://www.oracle.com/technetwork/index.html>.

- Be aware that not all application releases are certified and supported to run on all PeopleSoft PeopleTools releases. Check the PeopleSoft policy information in article ID 1348959.1 on My Oracle Support for further details on the support policy for your particular application. If you are planning to do a PeopleTools-Only upgrade, do not continue until you have verified that your application is supported on the target PeopleSoft PeopleTools release.
- This installation guide may refer you to other PeopleSoft documentation resources for more information or instructions. You can access Oracle's PeopleSoft Hosted Documentation online during the installation process. For PeopleSoft PeopleTools 8.53 and later, you also have the option to install PeopleSoft Online Help documentation, a dynamic, interactive, accessible HTML version of the documentation formerly known as "PeopleBooks."
- Oracle recommends that you use the PeopleSoft deployment packages (DPKs) for your PeopleSoft installation. The DPKs deliver pre-installed PeopleSoft components, which can be installed on virtualization platforms as well as directly on traditional, non-virtual machines ("bare-metal").

## See Also

"Installing PeopleSoft Online Help"

Oracle's PeopleSoft Hosted Documentation, <http://www.peoplesoftonlinehelp.com>

"Installing PeopleSoft Change Assistant"

## Task 1-1: Using Oracle Software Delivery Cloud to Obtain Installation Files

---

Before beginning the installation, you should have obtained the PeopleSoft installation software by downloading the necessary zip files from the Oracle Software Delivery Cloud portal. Use the information available in the PeopleSoft documentation and My Oracle Support Certifications to be sure that you obtain all the zip files required for your environment.

See Oracle Software Delivery Cloud, <http://edelivery.oracle.com>.



In case you have not yet obtained the necessary files, this documentation includes sections on obtaining the files at appropriate points during the installation process.

---

**Note.** If your PeopleSoft installation uses Oracle SOA Suite, note that the 32-bit versions of the Oracle SOA Suite 10g media components on the Oracle Software Delivery Cloud portal are certified to run on the Linux x86-64 and the Microsoft Windows 64-bit operating system platforms.

---

## See Also

Downloading Software from Oracle Software Delivery Cloud, My Oracle Support, Doc ID 2098595.1

---

## Task 1-2: Considering Project Planning

---

Identify the maintenance schedule for upcoming PeopleSoft PeopleTools and PeopleSoft application releases. These releases are typically on a regular schedule (for example, quarterly, biannually) and should be included in your project planning and budgeting processes. Maintenance schedules are posted on My Oracle Support. It is important to plan regular maintenance in your overall project plans. For example, for a year-long enterprise upgrade, development, and conversion project, make sure to set aside time for applying the PeopleSoft PeopleTools minor releases that ship during that time frame. Otherwise, if you fall behind, you may find that you need a fix shipped with one of the minor releases that cannot be backported as a patch.

Search for the term "maintenance schedules" on My Oracle Support. You can find schedules by year and quarter for PeopleSoft PeopleTools and PeopleSoft applications. The schedules include lists of bundles and maintenance packs for individual products.

---

## Task 1-3: Planning Your Initial Configuration

---

This section discusses:

- Understanding Workstations
- Understanding PeopleSoft Servers and Clients
- Defining the PeopleTools Client
- Defining the File Server
- Defining the Database Server
- Defining the Application Server
- Defining the Batch Server
- Defining Installation Locations
- Defining the Web Server
- Using Laser Printers

---

**Note.** For the sake of brevity, this documentation sometimes refers to DB2 for Linux, UNIX, and Windows as *DB2/LUW*.

---

---

**Note.** Oracle supports a number of versions of UNIX and Linux in addition to Microsoft Windows for the PeopleSoft installation. Throughout this book, there are references to operating systems. Where necessary, this book refers to specific operating systems by name (for example, Oracle Solaris, IBM AIX, or Linux); however, for simplicity the word UNIX is often used to refer to all UNIX-like operating systems, including Linux.

---

## Understanding Workstations

This section discusses:

- Using the PeopleTools Development Environment (Microsoft Windows-Based Clients)
- Using Workstations Equipped with Supported Web Browsers

---

**Note.** With the PeopleSoft Pure Internet Architecture, Microsoft Windows-based clients are primarily used as a development environment. End users can use any machine equipped with a supported web browser.

---

### Using the PeopleTools Development Environment (Microsoft Windows-Based Clients)

Microsoft Windows-based clients are referred to as the PeopleTools Development Environment. These clients—which run on supported Microsoft Windows platforms—can connect to the PeopleSoft database directly using client connectivity software (a two-tier connection) or through a PeopleSoft application server (a three-tier connection).

Three-tier connectivity offers great performance advantages over two-tier (especially over a WAN), reduces network traffic, and generally does not require that you install database connectivity on the client. However, any Microsoft Windows-based clients that will be running Data Mover scripts against the database, or running COBOL or Structured Query Report (SQR) batch processes on the client, must have database connectivity installed.

---

**Note.** COBOL is not needed for PeopleTools or for applications that contain no COBOL programs. Check My Oracle Support for details about whether your application requires COBOL.

See *Installing Supporting Applications*.

---

You need to have the PeopleTools Development Environment set up to create your database. For more information on setting up the PeopleTools Development Environment, refer to the product documentation for PeopleSoft Configuration Manager.

See the *PeopleTools: System and Server Administration* product documentation for more information about using PeopleSoft Configuration Manager.

For installation purposes, you must set up at least one Microsoft Windows-based client for sign-on using a two-tier connection to the database, so that it can create and populate the PeopleSoft database. This documentation refers to this client as the install workstation. Depending on your installation plan, you may want to set up more than one install workstation so that you can perform asynchronous installation tasks in parallel.

---

**Note.** The Microsoft Windows machine that you use to perform your PeopleSoft PeopleTools installation must be running in 256-color mode or higher when running the PeopleSoft installation and database configuration on Microsoft Windows. This is not necessary for UNIX or console mode.

---

## Using Workstations Equipped with Supported Web Browsers

To run the PeopleSoft Pure Internet Architecture, the client workstation only needs a web browser that is HTML 4.0 compliant. You may need an additional workstation for demonstration and testing purposes if you plan to use a browser running on a platform other than Microsoft Windows—such as Macintosh or UNIX.

See *PeopleTools: Portal Technology*.

See My Oracle Support, Certifications.

## Understanding PeopleSoft Servers and Clients

Here is a summary of the functionality included in the PeopleSoft servers and clients:

- *File Server*  
All Client executables (such as PeopleSoft Application Designer and Configuration Manager), PS/nVision, Change Assistant, files and directories necessary to perform upgrade, and Client SQR.  
See Defining the File Server
- *PeopleTools Client*  
All Client executables (such as PeopleSoft Application Designer and Configuration Manager), PS/nVision, Change Assistant, Change Impact Analyzer, PeopleSoft Test Framework, PSEM Agent, and Client SQR.  
See Defining the PeopleTools Client.
- *Application Server*  
PSADMIN and COBOL for remote call
- *Database Server*  
Scripts and data directories, files necessary to run Data Mover.
- *Process Scheduler Server*  
PSADMIN, COBOL, and SQR.
- *Web Server*  
The Web Server contains all the scripts file, Portal Search data files, and PeopleSoft Pure Internet Architecture (PIA) installation tools that can assist in setting up a web server domain. However, to run the PeopleSoft Pure Internet Architecture, the client workstation only needs a web browser that is HTML 4.0 compliant.

### Task 1-3-1: Defining the PeopleTools Client

The PeopleTools Client is the environment repository for the PeopleSoft PeopleTools Development environment. The PeopleTools Client provides two-tier and three-tier connectivity to PeopleSoft applications.

The PeopleSoft installer for the PeopleTools Client is included as part of the PeopleSoft PeopleTools installation. Keep in mind that the PeopleTools Client can be installed *only* on supported Microsoft Windows operating systems.

---

**Note.** The client may be referred to as the PeopleTools Client, PT Client, or PeopleSoft Microsoft Windows client in this documentation.

---

See "Using the PeopleSoft Installer," Installing the PeopleTools Client Files.

## Task 1-3-2: Defining the File Server

The file server is the environment (or file) repository for the PeopleTools Development Environment, which is needed for the Database Configuration Wizard. The file server is also the repository for the files necessary to perform an upgrade. This includes Change Assistant and all of the executables and scripts that are necessary to perform an upgrade. You will apply patches and updates from My Oracle Support directly to the file server and then copy the updated files to your other servers. In addition, the file server is a source repository for COBOL and SQR.

---

**Important!** Remember, a COBOL compiler is not needed for PeopleSoft PeopleTools unless your application contains COBOL programs. If your application requires COBOL and you are running on Microsoft Windows, we require that you maintain a central repository of your COBOL source code on the Windows file server. See the task Installing Supporting Applications later in this chapter for details on where you should install your COBOL compiler.

---

If you follow the default procedures recommended in this documentation, the install workstations, Microsoft Windows batch servers, and Microsoft Windows report servers will access the PeopleSoft files on the file server by pointing to a directory referred to in this documentation as *PS\_HOME* on a shared network drive. You can install SQR on the file server, or install them locally on Microsoft Windows batch servers and on Microsoft Windows-based clients that will be running these processes locally.

*Setting up a file server is part of installations on both UNIX and Microsoft Windows environments.* If you are doing an installation only for UNIX computers, you need a Microsoft Windows file server. If you are working only on Microsoft Windows, and you install the file server along with the other servers, you do not need to repeat the file server setup.

If you need to set up the file server on a separate Microsoft Windows machine, you should install PeopleSoft PeopleTools, any PeopleSoft applications, and the Multilanguage files.

In some cases you may choose to set up local copies of the PeopleSoft executables on the PeopleTools Development Environment and Windows batch servers, rather than mapping to a shared directory on the file server. You can use the instructions in the chapter "Using the PeopleSoft Installer" to perform such local installations.

## Task 1-3-3: Defining the Database Server

The servers that host your PeopleSoft databases need sufficient processing, storage, and networking resources to process the database requests, store the data and transaction logs, and communicate freely to the clients of this data. These databases will include your own PeopleSoft database prototypes as well as any system and demonstration databases delivered directly from Oracle with the PeopleSoft installation media.

See Planning Database Creation.

Database sizes vary depending on the applications that you install. The size of your prototype PeopleSoft database will also depend on the amount of data to be converted from your legacy system. A good rule of thumb for estimating the size of your prototype PeopleSoft database is to estimate the amount of disk space needed for the data to be converted from your legacy system, add to this the size required for the PeopleSoft System database, and then add an additional 50 percent of this combined figure to allow for growth.

## Task 1-3-4: Defining the Application Server

The application server is the centerpiece of the PeopleSoft Pure Internet Architecture. It connects to the PeopleSoft database and handles almost all SQL-intensive interactions with the database server required during online transaction processing. Microsoft Windows-based clients, in three-tier, communicate with the application server using Oracle Tuxedo messages. In the PeopleSoft Pure Internet Architecture, the application server interacts with user workstations through a web server.

The application server also provides functionality required for application messaging and for implementing the PeopleSoft Pure Internet Architecture. An application server is required in all PeopleSoft installations.

With DB2/LUW, you generally install the application server on the same machine as the database server, a configuration called *logical three-tier*. You can also install application servers on one or more separate UNIX, or Microsoft Windows machines. This configuration is called *physical three-tier*. (See the Certification area on My Oracle Support for information on supported operating systems for PeopleSoft Application Servers.)

All application servers require database connectivity to the database server. Before beginning your installation, make sure that you can connect from the application server machine to the database server using a SQL tool. This topic will be addressed later in this chapter.

### See Also

*PeopleTools: Portal Technology*

## Task 1-3-5: Defining the Batch Server

The term *batch server* is equivalent to the term *Process Scheduler server*. PeopleSoft batch processes, such as COBOL and SQR, are scheduled and invoked by a Process Scheduler server. In almost all configurations, batch server SQR and COBOL files are located and executed on the same computer as the database server.

---

**Note.** If the batch server is located on a UNIX platform, the SQR and COBOL files must be transferred from the file server to the database server, and COBOL source files must be compiled.

---

Oracle supports setting up the batch environments on a dedicated server, an application server, or even on the database server.

For Windows-specific batch processes—such as nVision reports, Cube Builder, or Microsoft Word—you need to set up a Windows batch environment on a Microsoft Windows application server or on a dedicated Microsoft Windows workstation.

Any computer operating as a batch server must have database connectivity installed so that it can make a two-tier connection to the PeopleSoft database.

### See Also

*PeopleTools: Process Scheduler*

## Task 1-3-6: Defining Installation Locations

This section discusses:

- Understanding Installation Locations

- Defining PS\_HOME
- Defining PS\_APP\_HOME
- Defining PS\_CFG\_HOME
- Defining PS\_CUST\_HOME
- Defining PIA\_HOME

## Understanding Installation Locations

As you proceed through the PeopleSoft PeopleTools installation, you are asked to specify several installation locations. Use the information in this section to choose how to specify the installation locations for the various components in a PeopleSoft installation.

In addition to these installation locations, there are home directories for the various supporting software, such as Oracle WebLogic, which are described in the appropriate chapters.

## Defining PS\_HOME

The *PS\_HOME* directory holds the PeopleSoft PeopleTools files. The way that you specify the other installation locations discussed in the following sections will determine whether other files are installed in *PS\_HOME* or elsewhere; for example, whether the PeopleSoft application files are installed into *PS\_HOME* or into *PS\_APP\_HOME*.

See "Using the PeopleSoft Installer."

For information on setting up *PS\_HOME* as a read-only environment, see the *PeopleTools: System and Server Administration* product documentation on securing *PS\_HOME* and *PS\_CFG\_HOME*.

*PS\_HOME* can be used in the following ways:

- Multiple hosts can access *PS\_HOME* on a shared (Microsoft Windows) or mounted (UNIX) location.
- An administrator can do an installation where all PeopleTools, PeopleSoft application, and customized files reside in the same location. That is, the paths for *PS\_HOME*, *PS\_APP\_HOME*, and *PS\_CUST\_HOME* are the same. The administrator can then copy and paste *PS\_HOME* to different locations with no requirement to duplicate the original file path. This scenario requires a *PS\_CFG\_HOME* location that is separate from *PS\_HOME*, *PS\_APP\_HOME* and *PS\_CUST\_HOME*.
- Several Application Server, PIA, and Process Scheduler domains can use the same *PS\_HOME*.

## Defining PS\_APP\_HOME

The *PS\_APP\_HOME* location holds the PeopleSoft application files.

Depending upon the PeopleSoft application that you are installing, for PeopleSoft PeopleTools 8.52 and later, the directory where you install the PeopleSoft application files does not have to be the same as the location where you install PeopleSoft PeopleTools, *PS\_HOME*. You can select any writeable location on the file system. The *PS\_APP\_HOME* location is sometimes referred to as "Application Home."

For details about whether this functionality is supported for your PeopleSoft application, and how it is used, see the PeopleSoft application-specific installation guide.

If you choose to install the PeopleSoft application software to a *PS\_APP\_HOME* location that is different from the *PS\_HOME* location where you installed PeopleSoft PeopleTools, you will need to define a *PS\_APP\_HOME* environmental variable.

For example, on Microsoft Windows:

1. Click the Start button, then Control Panel, System and Security, System, on Microsoft Windows 2012 R2.
2. Select Advanced system settings.
3. On the System Properties dialog box, select Advanced, and click Environment Variables.
4. Add or modify the user variable PS\_APP\_HOME and specify its value. For example:

```
PS_APP_HOME=C:\HC9.2
```

On UNIX, specify the environment variable with a command such as this:

```
PS_APP_HOME=/data1/ora/HC9.2;export PS_APP_HOME
```

If your environment includes more than one PeopleSoft application, such as FSCM and HCM, you can install into a separate *PS\_APP\_HOME* location for each. However, in this case, you must change the value of the *PS\_APP\_HOME* environment variable for any configuration tasks.

For information on setting and working with the *PS\_APP\_HOME* environment variable, see the product documentation *PeopleTools: System and Server Administration*, "Working with *PS\_APP\_HOME*."

See the chapters on installing and compiling COBOL in this documentation for further information.

## Defining PS\_CFG\_HOME

The *PS\_CFG\_HOME* location holds the configuration files for the application server, batch server and search server domains.

It also holds the configuration files for web server domains if *PIA\_HOME*, defined in the next section, is equal to *PS\_CFG\_HOME*. This location is sometimes referred to as "Config Home."

When you install PeopleSoft PeopleTools and the PeopleSoft application software, the PeopleSoft installer places the required files into the specified *PS\_HOME* directory. When you create an application server, batch server, or search server domain, the configuration files associated with that domain are installed into a directory referred to as *PS\_CFG\_HOME*.

By default, the system separates the binary files (executables and libraries) stored in *PS\_HOME* from the ASCII files (configuration and log files) associated with a domain stored in *PS\_CFG\_HOME*. This separation applies only to these servers:

- PeopleSoft Application Server
- PeopleSoft Process Scheduler Server
- PeopleSoft Search Server

When you use the PSADMIN utility, the system creates the *PS\_CFG\_HOME* directory based upon environment variables associated with the current user. This table lists the user environment variable and default directory by operating system:

Operating System	User Environment Variable	PS_CFG_HOME Default Location
UNIX	HOME	\$HOME/psft/pt/<peopletools_version>
Microsoft Windows	USERPROFILE	%USERPROFILE%\psft\pt\ <peopletools_version>

For example, if USERPROFILE is C:\Documents and Settings\asmith and the PeopleTools version is 8.56, by default *PS\_CFG\_HOME* would be C:\Documents and Settings\asmith\psft\pt\8.56. The configuration and log files for the application server, process scheduler server, and search server are installed below this directory.

---

**Note.** The *PS\_CFG\_HOME* directory is associated with the *PS\_HOME* from which it was originally generated.

---

This server domain configuration allows for a more flexible installation. You also have the opportunity to place different security restrictions on the binary and configuration files. To take advantage of this flexibility, you have the option to specify a different location by setting a *PS\_CFG\_HOME* environment variable. Before doing so, however, see the *PeopleTools: System and Server Administration* product documentation for a more complete explanation of working with *PS\_CFG\_HOME*.

## Defining PS\_CUST\_HOME

The *PS\_CUST\_HOME* location holds customized file system objects.

Anything that is changed from the file system objects that are delivered with the PeopleSoft application installation should be placed here. The sub-directory structure must mirror the *PS\_APP\_HOME* upon which it is based. For example, when you install your PeopleSoft application, the directory structure includes SQR scripts in *PS\_APP\_HOME/sqr*. If you have customized SQR scripts, you would place them in *PS\_CUST\_HOME/sqr*.

If a value is not assigned for the *PS\_CUST\_HOME* environment variable it assumes the default value of *PS\_HOME*. This location is sometimes referred to as "Cust Home."

For information on setting up and using *PS\_CUST\_HOME*, see the information on working with *PS\_CUST\_HOME* in the product documentation *PeopleTools: System and Server Administration*.

## Defining PIA\_HOME

When you install the PeopleSoft Pure Internet Architecture, the files are installed in the *PIA\_HOME* directory. The *PIA\_HOME* location holds the webserv directory, and the files for the PeopleSoft Pure Internet Architecture installation. The directory where you install PeopleSoft Pure Internet Architecture, *PIA\_HOME*, does not have to be the same as the location where you install PeopleSoft PeopleTools and the PeopleSoft application software, *PS\_HOME*. You have the option to specify the installation location for the PeopleSoft Pure Internet Architecture by setting the environment variable *PS\_CFG\_HOME*.

See "Setting Up the PeopleSoft Pure Internet Architecture in GUI Mode."

See "Setting Up the PeopleSoft Pure Internet Architecture in Console Mode."

The *PS\_CFG\_HOME* directory is created the first time that the PSADMIN utility starts. PSADMIN recognizes that *PS\_CFG\_HOME* is not present and creates it when necessary. This is done before any domains are created. When you invoke PeopleSoft Pure Internet Architecture, the installer checks your environment to determine the *PS\_CFG\_HOME*. If the environment variable *PS\_CFG\_HOME* is defined, the *PS\_CFG\_HOME* location is seen as the directory to which that environment variable points. If *PS\_CFG\_HOME* is not defined the default value is used.

See the product documentation for using the %V Meta variable in *PeopleTools: System and Server Administration* product documentation for more information about setting the *PS\_CFG\_HOME* environment variable.

## Task 1-3-7: Defining the Web Server

A web server is required to run the PeopleSoft Pure Internet Architecture. The PeopleSoft Pure Internet Architecture is certified to work with either of the following two J2EE web application servers (also commonly referred to as web servers):

- Oracle WebLogic Server
- IBM WebSphere Server

Refer to the Certifications page on My Oracle Support for supported web server combinations.



To find support information for the HTTP servers that can be used as reverse proxy servers (RPS), see the following:

- For Oracle WebLogic, see the Oracle WebLogic documentation, included with Oracle Fusion Middleware.
- For IBM WebSphere, see the information for PeopleSoft PeopleTools on My Oracle Support, Certifications.

Oracle WebLogic, IBM WebSphere, and the supported reverse proxy servers will provide out-of-the-box SSL support across all supported operating systems. Oracle WebLogic and IBM WebSphere provide demo digital certificates, but for production grade SSL you must purchase digital certificates from a Certificate Authority supported by the web server that you are using (for example, Verisign, Baltimore, Entrust, and so on).

## Task 1-3-8: Using Laser Printers

Along with the printer you will need a Windows printer driver to print the online reports that produce 180-character-wide reports using the HP LinePrinter font. Your printer must be configured with sufficient memory (typically 1.5 MB) to produce graphics images for page printouts.

### See Also

My Oracle Support, Certifications

## Task 1-4: Planning Database Creation

---

This section discusses:

- Understanding Database Creation
- Determining Databases and Database Names
- Defining DB2 for Linux, UNIX, and Windows, and PeopleSoft Databases

## Understanding Database Creation

When performing a PeopleSoft installation, you will create these types of PeopleSoft databases:

- System (also called SYS) databases, which contain the PeopleSoft PeopleTools and product-specific metadata required for development of a production database.
- Demo (DMO) databases, which are populated with sample data for study, demonstration, or training purposes.

### Task 1-4-1: Determining Databases and Database Names

Before you begin the installation process, you should determine how many PeopleSoft databases (System or Demo) of which type you need and how you intend to use them. You should also determine the names of the databases at this point, using database names that:

- Are limited to eight characters, all UPPERCASE.
- Capture information about the PeopleSoft product line and the type of database.

For example, you may want to create two databases with the names PSHRDMO and PSHRSYS, using the two characters HR (for Human Resources) to indicate the product line.

## Task 1-4-2: Defining DB2 for Linux, UNIX, and Windows, and PeopleSoft Databases

In this chapter we refer to both a DB2/LUW database and a PeopleSoft database. It is important to understand the difference.

- A DB2/LUW database is a set of SQL objects defined by one system catalog, using one instance of the DB2/LUW server executables and associated files. A DB2/LUW instance may have several databases.
- A PeopleSoft database is a set of SQL objects defined as having the same owner ID. These tables are always within a single DB2/LUW database. A PeopleSoft database includes the PeopleSoft objects and application data for one or more products in a PeopleSoft product line.

Each PeopleSoft database is created in a single DB2/LUW database. The database name is entered on the PeopleSoft logon screen. A suggested database name might be PPF80DMO (for an EPM demo database).

---

**Note.** Your database server should have sufficient space for the demo database. If you plan on substantially increasing the size of tables in your demo database, ensure that your file systems have ample space to accommodate growth.

---



---

**Note.** Starting with PeopleSoft PeopleTools 8.50, DB2/LUW installation (on supported UNIX operating systems, and Microsoft Windows) should configure and use a 64-bit DB2 instance.

---

## Task 1-5: Planning Multilingual Strategy

This section discusses:

- Understanding Multilingual Issues
- Choosing a Base Language
- Selecting Additional Languages
- Selecting a Database Character Set

### Understanding Multilingual Issues

Before beginning your installation, you should determine which languages your PeopleSoft system will need to support. If multiple languages are required, determine which language will be used most often. These decisions will affect tasks at various stages of the installation, including file server setup, database creation, and the ability to change the base language of the PeopleSoft database after it is created. Even if you do not plan on running your system in more than one language, you should decide the following information before completing this task:

- Database base language
- Additional languages (if any)
- Database character set (Unicode recommended)

The current languages provided by Oracle and their language codes are listed in the following table, as well as the corresponding database character sets for that language. These are the languages for which Oracle provides pre-translated products. If you plan to provide users access to your applications in these languages, Oracle recommends that you install the translations during your initial installation. This approach will keep you from having to perform an upgrade if you decide to add the Oracle-provided translations at a later date. After installation, you also have the option of performing your own translations, and adding additional languages.

In considering which languages to include, whether for pre-translated objects or for your own application development, keep in mind that certain languages require a Unicode database. Oracle recommends Unicode character sets rather than non-Unicode character sets, including Western European and Japanese Shift-JIS, for all installations and upgrades regardless of the languages used.

See [Selecting a Database Character Set](#).

Language Code	Language	Database Character Set
ARA	Arabic	Unicode only
CFR	Canadian French	Unicode recommended
CZE	Czech	Unicode only
DAN	Danish	Unicode recommended
DUT	Dutch	Unicode recommended
ENG	US English	Unicode recommended
FIN	Finnish	Unicode recommended
ESP	Spanish	Unicode recommended
FRA	French	Unicode recommended
GER	German	Unicode recommended
HUN	Hungarian	Unicode only
ITA	Italian	Unicode recommended
JPN	Japanese	Unicode recommended
KOR	Korean	Unicode only
NOR	Norwegian	Unicode recommended
POL	Polish	Unicode only
POR	Portuguese	Unicode recommended
ROM	Romanian	Unicode only
RUS	Russian	Unicode only
SVE	Swedish	Unicode recommended
THA	Thai	Unicode only

Language Code	Language	Database Character Set
TUR	Turkish	Unicode only
UKE	United Kingdom English	Unicode recommended
ZHS	Simplified Chinese	Unicode only
ZHT	Traditional Chinese	Unicode only


## See Also

*PeopleTools: Global Technology*

## Task 1-5-1: Choosing a Base Language

Each PeopleSoft database can have only one base language. PeopleSoft databases ship with English as the default base language. Typically, the base language of your database should match the language most commonly used by your organization, as it affects the performance of PeopleSoft applications.

When PeopleSoft PeopleTools attempts to open language-sensitive objects (such as pages and menus), it first compares the operator's preferred language to the base language of the database. If the preferred language matches the base language, PeopleSoft PeopleTools immediately loads the required definition from the base language PeopleSoft PeopleTools tables. However, if the user's preferred language differs from the database's base language, PeopleSoft PeopleTools must first query the related language tables for the object. Should a translation of the object not be found in the operator's preferred language, a query is then performed on the base language tables. The following process flow illustrates the selection of the language used for language-sensitive objects, beginning with the language selected when the user signs in to the PeopleSoft application:

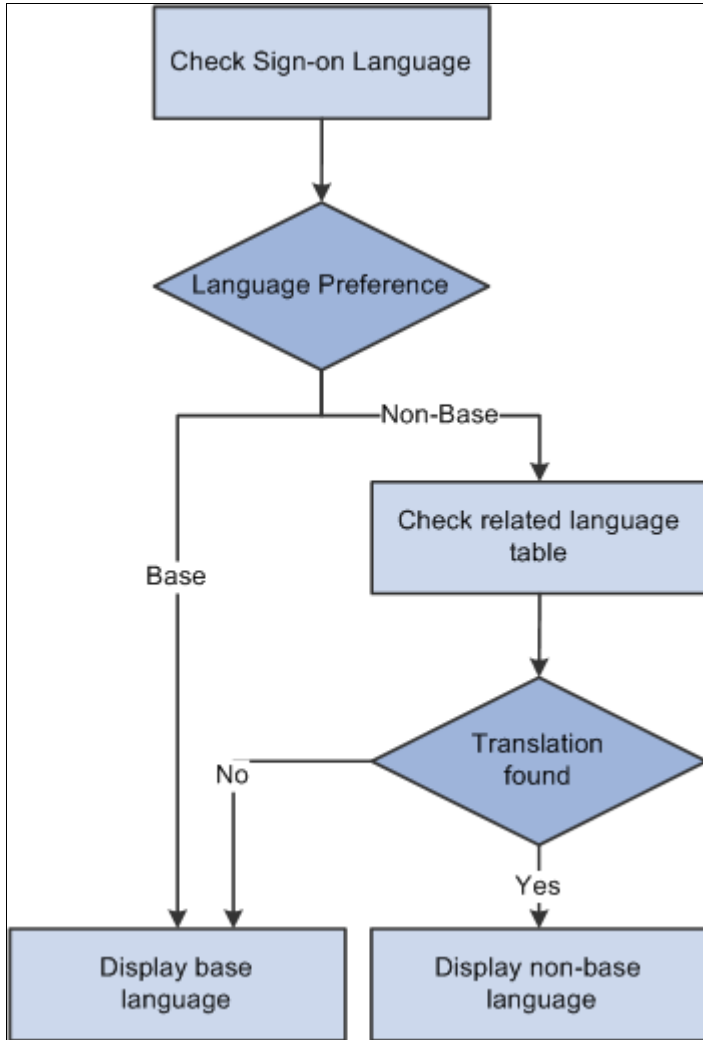

Language selection process using the base language and the preferred language

While these queries typically occur very quickly, they still take up valuable processing time. To optimize performance you can set the base language of your database as the language that is used most often by your users. Another consideration is that because PeopleSoft databases are shipped with a base language of English, maintenance is simpler if English remains the base language. Both configurations are supported by Oracle.

## Task 1-5-2: Selecting Additional Languages

Oracle provides translations of all end-user objects with the Global Multi-Language installation files. It is much easier to install additional languages upon initial database creation than to add them later in your implementation process, so we recommend that you choose which additional languages may be required now. There is no limit to the number of languages that can coexist in a single PeopleSoft database; however, remember that each language will require additional storage space, primarily for PeopleSoft PeopleTools objects.

## Task 1-5-3: Selecting a Database Character Set

This section discusses:

- Understanding Character Sets
- Using Unicode Databases

### Understanding Character Sets

Oracle recommends Unicode, but also supports non-Unicode (legacy) code sets, in PeopleSoft databases.

The following table lists a selection of the code sets, code pages, and languages that the PeopleSoft software supports for DB2 for Linux, UNIX, and Windows:

Code Set	Code Page	Languages Supported
1208	UTF-8	All languages
1252	1252	Western European languages
ISO8859-1	819	Western European languages
ISO8859-15	923	Western European languages

See *PeopleTools: Global Technology*, "Selecting and Configuring Character Sets."

### Using Unicode Databases

Unicode databases are required if the languages that you selected do not share the same character set. Typically, a single character set can encode all languages written in a single script. For example, English, French, and Spanish all share the same script (Latin), so they can coexist in a non-Unicode database. However, Japanese does not share the same script as French, so if you need to have Japanese and French coexist in a single system, you need a Unicode database.

If you decide to use Unicode for your database, you do not need to select a character set.

See Understanding Multilingual Issues.

See Understanding Character Sets.

## Task 1-6: Preparing for the PeopleTools-Only Upgrade

---

This section discusses:

- Understanding the PeopleTools Only Upgrade
- Reviewing the Upgrade Documentation
- Shutting Down Servers
- Reviewing Customized Configuration Files

### Understanding the PeopleTools Only Upgrade

As part of a PeopleTools-only upgrade, you will need to use files included in the new PeopleSoft PeopleTools release. For PeopleSoft PeopleTools 8.54 and later, you must install a separate PeopleTools codeline *PS\_HOME* that is different than your old release *PS\_HOME* for use in performing the upgrade. When performing a PeopleTools-only upgrade, prior to the installation of the new release codeline, you will need to perform the tasks described in this section.

### Task 1-6-1: Reviewing the Upgrade Documentation

Review *Getting Started on Your PeopleTools Upgrade*, located on the PeopleTools Upgrade Home Page for your new PeopleSoft PeopleTools release. The installation of the new PeopleTools codeline is only part of the upgrade process. After installing the PeopleTools codeline, you will apply the PeopleTools upgrade Change Package to complete the database portion of the upgrade.

#### See Also

PeopleSoft PeopleTools Upgrade Home Page for your new release, My Oracle Support

*PeopleTools: Change Assistant and Update Manager*

### Task 1-6-2: Shutting Down Servers

Shut down any application servers, web servers, and Process Scheduler servers. Make sure that there are no lingering domain processes from any Application Server domains. Such threads can interfere with successfully installing new application server files. If there are any threads remaining after you shut down the domains, you must manually remove them.

---

**Note.** For IBM AIX, run the *slibclean* utility as the root user to remove unused shared libraries from memory.

---

### Task 1-6-3: Reviewing Customized Configuration Files

If you have any customized configuration files (such as *psappsrv.cfg*, *psconfig.sh*, *pscbl.mak*, *psrun.mak*, and so on), organize and save them in order to have them ready for configuring your new release system. This enables you to preserve any tuned variables. If after finishing the upgrade, you want to install and use a different *PS\_HOME* than the one used during the upgrade, then make sure that these customized configuration files are available for use in configuring your new release system.

## **Task 1-7: Reviewing Patches and Updates Required at Installation**

---

Before beginning the installation, check the Patches and Updates page on My Oracle Support to identify any patches, updates, or fixes required at installation that you will need to apply, based on the products, product version, and PeopleSoft PeopleTools version that you are installing. Additional instructions for applying the patches and updates may be included within each patch..

Make note of all the patches and updates, and plan to apply them at appropriate stages during the installation procedure. For example, a replacement for a PeopleTools executable would be applied after installing the media pack to the appropriate server, and so on.

---

**Note.** For any patches and updates that require database changes, be sure to read the section on deciding when to apply patches.

See "Completing the Database Setup," Reviewing Patch Application.

---

The following procedure describes how to access the Patches & Updates database. Contact Oracle if you don't have a user ID and password for My Oracle Support.

---

**Note.** The My Oracle Support interface is updated periodically. For information on using the Patches & Updates area, select the Help link at the top of the page.

---

To review patches and updates required at installation:

1. Go to My Oracle Support at <https://support.oracle.com>.
  2. Enter your user name and password to log in.
- 

**Note.** Be sure to log on, or you will not see all of the menu options.

---

3. Select Patches & Updates.
  4. In the Patch Search section, select the Product or Family (Advanced) link.  
The Search page includes several search filters. Click the plus sign to add additional filters.
  5. In the Product drop-down list, select *PeopleSoft Enterprise PT PeopleTools*.
- 

**Note.** PeopleSoft products begin with the word *PeopleSoft*.

---

6. In the Release drop-down list, select the appropriate PeopleSoft PeopleTools release for the patch search.
  7. Select Install/Upgrade (PeopleSoft) as a search filter, and select Required at Install from the drop-down list beside it.
- 

**Note.** This search filter is only available when you select PeopleSoft products.

---

8. Click the Search button (Patch Search).
9. Note any PeopleTools patches and updates that apply to your installation.  
Open the Read Me documentation to view information about the patch that you choose for your installation.
10. Return to the Patch Search page (or click Edit Search on the results page) and search for any PeopleSoft application-related incidents by selecting the appropriate product or product family, release, and language.

It is strongly recommended that you include Language as a search filter for PeopleSoft application patch searches.

Make sure the Required for Install option is selected and click the Search button (Patch Search).



11. Note any PeopleSoft application-specific patches and updates that apply to your installation.

---

**Note.** Keep in mind that your installation will require additional software components, including web server, report generation, and search software. Be sure to check for updates and patches for any additional component software you install on your environment. Later chapters cover this topic in detail.

---

After this installation, you can upgrade your Java Runtime Engine (JRE) to a newer version without upgrading PeopleTools, as long as the new JRE is certified.

## See Also

PeopleSoft PeopleTools Patches Home Page, My Oracle Support, Doc ID 2062712.2

"Installing Web Server Products"

"Installing Additional Components"

PeopleTools Certifications - Suggested Fixes, My Oracle Support, (search for the article title)

Operating System, RDBMS, and Additional Component Patches Required for Installation PeopleTools, My Oracle Support, (search for the article title)

PeopleSoft Enterprise PeopleTools Certification Table of Contents, My Oracle Support, (search for the article title)

## Task 1-8: Creating PeopleSoft User IDs

---

This section discusses:

- Understanding PeopleSoft User ID Creation
- Prerequisite
- Creating UNIX User IDs
- Creating Windows User IDs

### Understanding PeopleSoft User ID Creation

In this task you will create the user IDs required for installation.

---

**Note.** The term *user ID* refers to the UNIX or Windows user name, not the UNIX or Windows user ID.

---

### Prerequisite

The following procedure assumes the team member performing these steps has understanding of the tools required to create the described UNIX and Microsoft Windows entities.

#### Task 1-8-1: Creating UNIX User IDs

This procedure lists required steps in the creation of the PeopleSoft-required UNIX User IDs.

To create UNIX IDs:

1. Create a UNIX group for the DB2/LUW instance owner.

This group ID will be the primary group of the UNIX ID for the DB2/LUW instance owner. The recommended group ID name is db2adm1.

---

**Note.** Any UNIX ID that belongs to this group will inherit System Administration authority (SYSADM) for the given DB2/LUW instance. Therefore, take extra care when you place a UNIX ID under this group.

---

2. Create a UNIX ID for the DB2/LUW for UNIX instance owner.

This ID will be used in the next task to create an instance. The group ID for this user should be the same as the one created in the previous step. We suggest that you name this ID db2udbx, where the final *x* might be set to *d* for development or *p* for production. IBM restrictions on names apply (for example, you cannot use names beginning with SYS).

3. Create a UNIX ID for the PeopleSoft access ID/table owner ID.

The access ID, which is also known as the table owner ID, will be granted DBADM authority by the Data Mover import script that will be run in the chapter concerning creating a database. The access ID and access password must be tightly controlled. Both are encrypted in the PeopleSoft database. The access ID cannot be more than eight characters long. The password for the access cannot be more than 30 characters long. The group ID for this user can be the same as the one created in step 1 or a completely different group ID. However, making this group ID the same as the one in step 1 will implicitly grant this UNIX ID the SYSADM authority.

4. Create a UNIX ID for the PeopleSoft connect ID.

The connect ID will be used by PeopleSoft to connect to the database. The Data Mover script generated by Database Setup grants this user minimal database privileges. Set the group, environment variables, and permissions to enable this UNIX ID to access the DB2/LUW database. This ID cannot be more than eight characters long. The password for the connect ID cannot be more than 30 characters long or contain any percent characters (%). The group ID for user should not be the same as the one created in step 1. This UNIX ID should have minimal authority and no SYSADM privilege.

5. Create another separate group ID and UNIX ID for the DB2/LUW Fenced User.

This fenced group ID and UNIX ID are to be used by DB2/LUW for fenced User Defined function (UDF) and stored procedures. Although PeopleSoft does not use the fenced ID, the fenced ID is required for DB2/LUW instance creation. The recommended group ID and username for this UNIX ID are db2fadm1 and db2fenc1 respectively.

## See Also

"Creating a Database"

*IBM DB2 UDB for Linux, UNIX, and Windows administration guide*

*IBM DB2 UDB for Linux, UNIX, and Windows installations manual*

## Task 1-8-2: Creating Windows User IDs

This procedure lists required steps in the creation of the PeopleSoft-required Microsoft Windows user IDs.

To create Microsoft Windows IDs:

1. Create a USER ID for the DB2/LUW Instance Owner.

---

**Note.** For Microsoft Windows, DB2/LUW requires that users have Administrative Authority on the Windows machine to install the DB2/LUW for Windows. A DB2/LUW Administrator ID is required, which must have Local Administrator authority to set up the DB2/LUW Catalog information and the ODBC Data Source Administration. In addition, the DB2/LUW Administrator User ID has to be eight characters or less; as in "db2admin." The password also must be eight characters or less.

---

2. Create a user ID for the PeopleSoft access ID/table owner ID.

The access ID, which is also known as the table owner ID, will be granted DBADM authority by the Data Mover import script that will be run during database creation. The access ID and access password must be tightly controlled. Both are encrypted in the PeopleSoft database.

---

**Note.** Refer to your database platform documentation for information about access ID and password length requirements. The PeopleSoft system accepts access ID passwords between 8 and 30 characters in length to accommodate different database and operating system platforms.

---

3. Create a user ID for the PeopleSoft connect ID.

The connect ID will be used by PeopleSoft to connect to the database. The Data Mover script generated by Database Setup grants this user minimal database privileges.

---

**Note.** You must limit the access ID and connect ID to eight characters or less, and the passwords for each to 30 characters or less. In addition, the connect ID password should not contain any forward-slash characters (/).

---

## Task 1-9: Installing the Database Engine

---

To install the database engine:

1. If you have not already done so, install the DB2/LUW database engine on your database server.
2. Create an instance if one does not already exist.

Create an instance of the database engine. On UNIX, the name of the instance matches the name of the user ID corresponding to the DB2/LUW Instance Owner ID that you created in the previous task, such as "db2udb1". On Microsoft Windows, the default instance name is DB2.

For connectivity between the DB2/LUW database and clients or utilities running on other systems, install a supported version of DB2 Connect or DB2 Client.

Beginning with PeopleSoft PeopleTools 8.53, the 64-bit version of DB2 Connect or DB2 Client is required on Microsoft Windows.

### See Also

*IBM DB2 UDB for Linux, UNIX, and Windows installations manual*

*IBM DB2 UDB for Linux, UNIX, and Windows administration manual*

My Oracle Support, Certifications

## Task 1-10: Configuring DB2 UDB for Linux, UNIX, and Windows for Remote Client Access

The following procedure outlines the steps to configure DB2/LUW for access by clients running on systems other than the UNIX system hosting DB2.

To configure DB2/LUW for remote client access:

1. Set up the DB2 Communication Protocol.

Verify that the communication protocol for the DB2/LUW server is set to TCP/IP by typing the following from the UNIX prompt:

```
/home/db2udb1 >db2set -all
[i] DB2COMM=tcpip
[g] DB2SYSTEM=rt-ibm08
[g] DB2ADMINSERVER=db2as
```

If the DB2COMM environment variable is not defined, define this variable by issuing:

```
db2set DB2COMM=tcpip
```

2. Include the DB2 Runtime Client Library Path.

Ensure that the environment variable for the runtime client library path is properly set for the UNIX or Linux ID by editing the appropriate profile file to include ~/sqllib/lib. The environment variable depends upon the operating system, as described in this table:

Operating System	Environment Variable
IBM AIX	LIBPATH
HP-UX Itanium	LD_LIBRARY_PATH
Linux and Oracle Solaris	LD_LIBRARY_PATH

The profile file depends upon the UNIX shell you are using. These examples show how to set the LIBPATH environment variable for an IBM AIX operating system. For other operating systems, use the correct environment variable.

- If the default shell for the UNIX ID is Bourne Shell or Korn Shell, add the following lines in the file ~/sqllib/db2profile:

```
LIBPATH=${LIBPATH}:${INSTHOME}/sqllib/lib
export LIBPATH
```

- If the default shell is C Shell, add the following line in the file ~/sqllib/db2cshrc:

```
set LIBPATH=($LIBPATH ${INSTHOME}/sqllib/lib)
```

3. Edit the /etc/services file to add a service name entry pair for DB2/LUW.

On UNIX, the services file is under /etc/services. On Microsoft Windows, it is under C:\WINDOWS\system32\drivers\etc.

```
db2cdb2udb1 50000/tcp # DB2 UDB Runtime Client
db2idb2udb1 50001/tcp # DB2 UDB Runtime Client interrupt
```

The service names (db2cdb2udb1 and db2idb2udb1) are user-defined values. Additional suggestions include db2udbp and db2udbpi, where "p" stands for "production." You must define a unique pair of service names for each instance created per machine.

Port numbers (50000 and 50001 above) may be arbitrarily assigned. That is, you could use 50000 and 50001 or any other pair of sequential unassigned numbers greater than 1024. However, port numbers usually follow installation or industry protocols, so consult with your network administrators.

#### 4. Update Database Manager SVCENAME Parameter on the DB2/LUW Server.

To establish the service name that clients will use to communicate with DB2/LUW, issue the following command using the DB2/LUW Command Line Processor:

```
db2 update dbm cfg using svcename db2cdb2udb1
```

---

**Note.** Although a port number and a service name were assigned for the Interrupt port (for example, db2idb2udb1), it is never used.

---

To put the above changes into effect, you have to re-login and re-start the DB2/LUW database instance. Here are the commands:

```
login db2udb1
db2stop
db2start
```

## Task 1-11: Installing Supporting Applications

---

Oracle requires that a number of supporting applications be installed for the PeopleSoft installation on batch servers and on any Windows-based client on which batch processes will be run locally. (Throughout the rest of this section we refer to these Windows-based clients as *two-tier clients*.) Be sure to check My Oracle Support, Certifications to ensure that you are installing software versions that are certified by Oracle.

### COBOL

- Consult the PeopleSoft information on My Oracle Support to verify whether your application requires COBOL. Remember that COBOL is not needed for PeopleSoft PeopleTools or for applications that do not contain COBOL programs.  
See PeopleSoft Enterprise Frequently Asked Questions about PeopleSoft and COBOL Compilers, My Oracle Support, (search for the article name).  
See PeopleSoft Enterprise Frequently Asked Questions about PeopleSoft and the IBM COBOL Compiler, My Oracle Support, (search for the article name).
- For PeopleSoft applications written in COBOL, install the appropriate version of the COBOL compiler on the server where you will compile.  
See "Installing and Compiling COBOL on Windows."  
See "Installing and Compiling COBOL on UNIX."
  - For UNIX servers, install Micro Focus Server Express or IBM Compiler for IBM AIX.
  - For Microsoft Windows servers, install the appropriate version of Micro Focus Net Express.
- If all your servers are on Microsoft Windows operating systems, Oracle recommends that you install a COBOL compiler on the file server.

You can install PeopleSoft PeopleTools plus any patches on the file server, compile your COBOL there, and then copy the COBOL binaries to your application and batch servers.

- If your application and batch servers are on UNIX or Linux, we recommend that you designate a single server as the compile server, so that you can compile COBOL from this central location and then distribute it to the rest of your application and batch servers.

If you use this approach, you only need to copy patches or customizations over to the compile server. In this case, you would install a COBOL compiler on the master (or compile) server and either the COBOL compiler or runtime on the rest. You can also copy patches or customizations from the file server to all of your UNIX servers and compile the COBOL on each machine.

Note that the compile server must have the same operating system as any destination application or batch servers. For example, if your compile server is an IBM AIX machine, you can only copy COBOL compiled there to other IBM AIX application and batch servers. Oracle recommends this approach. It will help you keep your COBOL source code in sync and only requires that you install COBOL in a single location.

- The format of COBOL source file names of patches or customizations on the file server should always be UPPERCASE.cbl to ensure compatibility with your UNIX servers.
- The PeopleSoft Installer installs COBOL source code from the installation directory to your Microsoft Windows file server and to all UNIX servers, but not to the rest of your Microsoft Windows servers.

### *SQR*

- You must install SQR on any non-Windows batch server.
- On Microsoft Windows batch servers and two-tier clients, you have the option of installing SQR locally, or mapping to a copy installed on the file server.
- Because SQR does not require any local registry settings, you can execute SQR from any Microsoft Windows batch server or two-tier client once SQR has been installed to a shared directory. Installing SQR locally will result in improved performance; over a slow network connection the improvement will be significant.

### *Microsoft Office*

Install Microsoft Office (Excel and Word) on any Windows batch server or two-tier client that will be running PS/nVision or Microsoft Word batch processes.

Microsoft Office must be installed locally, because it requires registry settings.

## **See Also**

My Oracle Support, Certifications

## **Task 1-12: Performing Backups**

---

Before proceeding, you should back up all servers and workstations that are set up for installation so you can recover to this point if necessary. Do the following:

- Back up any changes you made to the database server in setting up your PeopleSoft system.
- Back up any changes you made to your file server while setting aside space for your PeopleSoft system and setting up access privileges.
- Once you set up your install workstations to access the file server and database server simultaneously, back up the workstations.

## Task 1-13: Using PeopleSoft Change Assistant and PeopleSoft Change Impact Analyzer

---

After you have completed the tasks in this book to install PeopleSoft PeopleTools, including installing any necessary patches and fixes, you need to install PeopleSoft Change Assistant. PeopleSoft Change Assistant is a standalone application that enables you to assemble and organize all of the steps necessary to apply patches and fixes for maintenance updates.

PeopleSoft Change Assistant gathers all the necessary information for a maintenance update from the Environment Management Hub and uploads it to My Oracle Support. With the environment data available, My Oracle Support can determine what updates are applicable to your environment. PeopleSoft Change Assistant carries out the following tasks:

- Coordinates with Environment Management Framework to monitor information specific to your PeopleSoft implementation.
- Finds required updates
- Downloads updates
- Creates change packages

---

**Note.** Beginning with PeopleSoft PeopleTools 8.53, use the PeopleSoft Update Manager from PeopleSoft Change Assistant to use a tailored search to find patches, as well as create and apply change packages.

---

- Applies all change packages

You can also install PeopleSoft Change Impact Analyzer, either as part of the PeopleSoft Change Assistant installation, or separately from the installation executable provided with PeopleSoft PeopleTools. PeopleSoft Change Impact Analyzer is a Microsoft Windows-based tool that you can use to evaluate the effect of changes you make on your installation.

### See Also

"Installing PeopleSoft Change Assistant"

"Installing PeopleSoft Change Impact Analyzer"

*PeopleTools: Change Assistant and Update Manager*

*PeopleTools: Change Impact Analyzer*





## Chapter 2

# Installing Web Server Products

This chapter discusses:

- Installing Oracle WebLogic Server
- Installing IBM WebSphere Application Server

## **Task 2-1: Installing Oracle WebLogic Server**

---

This section discusses:

- Understanding the Oracle WebLogic Installation
- Reviewing Troubleshooting Tips
- Obtaining Oracle WebLogic Installation Files from Oracle Software Delivery Cloud
- Installing JDK
- Installing Oracle WebLogic on Microsoft Windows
- Installing Oracle WebLogic on Linux or UNIX in Silent Mode
- Configuring JDK for Daylight Savings Time Change
- Removing the Oracle WebLogic Installation on Microsoft Windows
- Removing the Oracle WebLogic Installation on Linux or UNIX

### **Understanding the Oracle WebLogic Installation**

PeopleSoft PeopleTools 8.56 supports Java 8 enabled 64-bit Oracle WebLogic Server 12.2.1. You must install an operating-system specific Java Developers Kit (JDK) before beginning the Oracle WebLogic installation.

See Installing JDK for Oracle WebLogic.

To familiarize yourself with the most current support information and information about any required Oracle WebLogic service packs based on operating system platform or PeopleSoft PeopleTools versions, consult the Certifications area of My Oracle Support.

### **See Also**

Oracle Software Delivery Cloud, <http://edelivery.oracle.com>

My Oracle Support, Certifications

Clustering and High Availability for PeopleTools, My Oracle Support, (search for the article title)

Operating System, RDBMS, and Additional Component Patches Required for Installation PeopleTools, My Oracle Support, (search for the article title and release number)

Oracle WebLogic Server 12.2.1 documentation, <http://docs.oracle.com/middleware/1221/wls/index.html>

## Reviewing Troubleshooting Tips

If you have trouble with the installation, review these tips:

- It can require up to 800 MB space to install Oracle WebLogic. If there is not enough space, the installer displays an error with information about the space limitation. You will need to exit the installation and create some space under your home directory before starting over.
- The Oracle WebLogic installer makes use of the default system temporary space. It will stop and display an error message if the temporary space is not sufficient. Clean up the default system temp space and try again. If you do not have the privilege to clean up that directory and need to proceed, the workaround is to set aside a directory under your Home directory and use it as the temporary space. This can be achieved by setting `-Djava.io.tmpdir` in the command for launching the installer.

The following command is a sample Linux command for silent mode installation, which uses the "temp" directory under your Home directory. *RESPONSE\_DIR* refers to the location of the silent mode response file, and *INVENTORY\_DIR* refers to the location of the Oracle inventory file.

See *Installing Oracle WebLogic on Linux or UNIX in Silent Mode*.

```
$JAVA_HOME/bin/java -jar -Djava.io.tmpdir=~/.temp ./fmw_12.2.1.0.0_>
wls.jar -silent -responseFile RESPONSE_DIR/res.rsp -invPtrLoc INVENTORY_>
DIR/oraInst.loc
```

---

**Note.** This workaround may not be applicable on all platforms. If you tried and the installer still errors out due to the amount of temporary space, contact your system administrator to clean up the system temporary space before proceeding.

---

- If the installation fails, and the Middleware Home directory that you specified for the Oracle WebLogic 12.2.1 installation is one in which other Oracle products have been installed in previous releases, (for example `c:\oracle` folder in Microsoft Windows), it may indicate corruption in the `registry.xml` file inside your existing Middleware Home. Pick a different location for the Oracle WebLogic 12.2.1 installation directory and try the installation again.
- If you are installing onto an UNIX or Linux environment, in case of installation failure, refer to the log file `Wls1221Install.log` under the installation logs directory to view the events that occurred.
- If you encounter the following error message while running in console mode on a Microsoft Windows operating system, it means an environment variable `_JAVA_OPTIONS` has been set in your system. It causes the Java process initiated by the Oracle WebLogic installer to fail.

```
ERROR: JVMPI, an experimental interface, is no longer supported.
Please use the supported interface: the JVM Tool Interface (JVM TI).
```

To resolve the problem, remove the environment variable `_JAVA_OPTIONS` from your system and rerun the installation.

- If you encounter the following error message while installing on an Oracle Solaris operating system, it means there is a problem with access to the temporary directory:

```
*sys-package-mgr*: can't write cache file
```

This message appears because the Oracle WebLogic installer creates a temporary directory (for example, on Oracle Solaris it is `/var/tmp/wlstTemp`) that is shared by all users, and it is unable to differentiate between users. As a result, access to the directory is blocked when the user accessing the directory is not the one who originally created the directory. The workaround for this problem is to remove the installation and install it again after manually adjusting the temporary directory permissions. A user with superuser privileges can use

the following command to adjust the permissions:

```
chmod -R 777 /var/tmp/wlstTemp
```

For more information, search the Oracle documentation for Oracle WebLogic.

## Task 2-1-1: Obtaining Oracle WebLogic Installation Files from Oracle Software Delivery Cloud

At this point you should have already downloaded the necessary files from Oracle Software Delivery Cloud. If not, this section includes additional information on finding and using the files for Oracle WebLogic if necessary.

See "Preparing for Installation," Using Oracle Software Delivery Cloud to Obtain Installation Files.

See Oracle Software Delivery Cloud, <https://edelivery.oracle.com>.

To obtain the files for Oracle WebLogic installation:

1. After logging in to Oracle Software Delivery Cloud, read the information about export restrictions, and then click Accept.
2. Enter Oracle WebLogic in the Product field, and select Oracle WebLogic Server Enterprise Edition (FMW, WLS, WebLogic Server 12c), from the drop-down list.

---

**Note.** The Enterprise Edition includes Oracle WebLogic Server and Oracle Coherence, as well as other items.

---

3. Click Select Platform, select the operating system you are running on, and click Select.

The following operating systems are supported:

- IBM AIX
- HP-UX Itanium
- Linux
- Microsoft Windows
- Oracle Solaris on SPARC
- Oracle Solaris on x86-64

4. Click Continue.
5. On the page listing the selected product, click Continue.

---

**Note.** Click the arrow to view the list of products included.

---

6. Read the license agreements, and select the check box to acknowledge that you accept the agreement, and then click Continue.
7. Click Continue on the Download Queue page.
8. On the File Download window, download the zip files for Oracle WebLogic Server and Oracle Coherence.

Download the files you need by clicking a file name to download an individual file, or click Download All to obtain all of the files listed.

Save the zip files to a temporary directory on your local system. The directory where you save the zip file is referred to in this documentation as *WLS\_INSTALL*. You must extract (unzip) the file on the platform for which it is intended. For example, if you download the zip file for Oracle Solaris, you must unzip it on Oracle Solaris to avoid problems. If you unzip the file to a staging directory on a Microsoft Windows computer and copy the staging directory to an Oracle Solaris, the stage area files may be corrupt.

9. Extract the files into *WLS\_INSTALL*.

The Oracle WebLogic installer file is `fmw_12.2.1.0.0_wls.jar`.

---

**Note.** If you need to FTP the downloaded file, make sure to FTP it in Binary mode.

---

## Task 2-1-2: Installing JDK

This section discusses:

- Understanding the JDK Requirement for Oracle WebLogic
- Installing JDK for IBM AIX
- Installing JDK for HP-UX Itanium
- Installing JDK for Linux
- Installing JDK for Microsoft Windows
- Installing JDK for Oracle Solaris on SPARC
- Installing JDK for Oracle Solaris on x86-64

### Understanding the JDK Requirement for Oracle WebLogic

Before beginning the Oracle WebLogic installation you must install the 64-bit Java 8 JDK. The specific JDK required depends upon the operating system and vendor, as described in this table:

Operating System Platforms	JDK Version Supported	64-bit or Mixed Mode*
IBM AIX	IBM JDK 8.0	64-bit
HP-UX Itanium	Hewlett-Packard JDK 8.0	Mixed mode Use "-d64" to run in 64-bit mode.
Linux	Oracle JDK 1.8.0_65+	64-bit
Microsoft Windows	Oracle JDK 1.8.0_65+	64-bit
Oracle Solaris on SPARC	Oracle JDK 1.8.0_65+	64-bit
Oracle Solaris on x86-64	Oracle JDK 1.8.0_65+	64-bit

\* The mixed mode installer runs in 32-bit by default. The parameter `-d64` is required to run them in 64-bit mode.

### Installing JDK for IBM AIX

To install 64-bit IBM JDK for IBM AIX:

1. Go to the IBM JDK download and service site:

<http://www.ibm.com/developerworks/java/jdk/aix/service.html>

---

**Note.** You need a user name and password for downloading IBM JDK. If you don't have the required credentials, your AIX support personnel should be able to help.

---

2. Select the link for Java 8 64-bit under Java SE Version 8.
3. Provide the required information to sign in.
4. Install the JDK on the AIX computer where you will install the Oracle WebLogic server.

The directory where you install the JDK is referred to in this documentation as *JAVA\_HOME*.

---

**Note.** Spaces are not allowed in the *JAVA\_HOME* name.

---

## Installing JDK for HP-UX Itanium

To install Hewlett-Packard JDK on HP-UX Itanium:

1. Go to the Hewlett-Packard Downloads and Documentation site.  
See JDK/JRE 8.0.x Downloads and Documentation,  
<https://h20392.www2.hp.com/portal/swdepot/displayProductInfo.do?productNumber=HPUXJDKJRE80>.
2. Select the link for Version 8.0.08 or higher.
3. Provide the required information to sign in.
4. Click Next and download JDK.
5. Install the JDK on the computer where you will install the Oracle WebLogic server, following the instructions in the Hewlett-Packard documentation.

The directory where you install the JDK is referred to in this documentation as *JAVA\_HOME*.

---

**Note.** Spaces are not allowed in the *JAVA\_HOME* name.

---

## Installing JDK for Linux

To install 64-bit JDK on Linux:

1. Go to the Oracle Java download site:  
<http://www.oracle.com/technetwork/java/javase/downloads/index.html>
2. Download Oracle Java 8 64-bit JDK version 1.8.0\_65 or higher for Linux x86-64.  
Refer to the JDK installation instructions at the following link:  
[http://docs.oracle.com/javase/8/docs/technotes/guides/install/linux\\_jdk.html#BJFGGEFG](http://docs.oracle.com/javase/8/docs/technotes/guides/install/linux_jdk.html#BJFGGEFG)
3. Install the JDK on the computer where you will install the Oracle WebLogic server. The directory where you install the JDK is referred to in this documentation as *JAVA\_HOME*.

**Note.** Spaces are not allowed in the *JAVA\_HOME* name.

---

## Installing JDK for Microsoft Windows

To install 64-bit JDK on Microsoft Windows:

1. Go to the Oracle JDK download site:  
<http://www.oracle.com/technetwork/java/javase/downloads/index.html>
2. Download Oracle Java 8 64-bit JDK version 1.8.0\_65 or higher for Microsoft Windows x86-64.  
Refer to the JDK installation instructions at the following link:

[http://docs.oracle.com/javase/8/docs/technotes/guides/install/windows\\_jdk\\_install.html#CHDEBCCJ](http://docs.oracle.com/javase/8/docs/technotes/guides/install/windows_jdk_install.html#CHDEBCCJ)

3. Install the JDK on the computer where you will install the Oracle WebLogic server. The directory where you install the JDK is referred to in this documentation as *JAVA\_HOME*.

---

**Note.** Spaces are not allowed in the *JAVA\_HOME* name.

---

## Installing JDK for Oracle Solaris on SPARC

To install JDK on Oracle Solaris on SPARC (64-bit):

1. Go to the Oracle JDK download site:

<http://www.oracle.com/technetwork/java/javase/downloads/index.html>

2. Download the Oracle Java 8 64-bit JDK version 1.8.0\_65 or higher for Solaris SPARC.

Refer to the installation instructions at the following link:

[http://docs.oracle.com/javase/8/docs/technotes/guides/install/solaris\\_jdk.html#CHDBJEFD](http://docs.oracle.com/javase/8/docs/technotes/guides/install/solaris_jdk.html#CHDBJEFD)

3. Install the JDK on the computer where you will install the Oracle WebLogic server.

The directory where you install the JDK is referred to in this documentation as *JAVA\_HOME*.

---

**Note.** Spaces are not allowed in the *JAVA\_HOME* name.

---

## Installing JDK for Oracle Solaris on x86-64

To install JDK for an Oracle WebLogic installation on Oracle Solaris on x86-64:

1. Go to the Oracle JDK download site:

<http://www.oracle.com/technetwork/java/javase/downloads/index.html>

2. Download the Sun Java 8 64-bit JDK version 1.8.0\_65 or higher for both Oracle Solaris x86 and Oracle Solaris x64.

Refer to the installation instructions at the following link:

[http://docs.oracle.com/javase/8/docs/technotes/guides/install/solaris\\_jdk.html#CHDBJEFD](http://docs.oracle.com/javase/8/docs/technotes/guides/install/solaris_jdk.html#CHDBJEFD)

3. Install the JDK on the computer where you will install the Oracle WebLogic server.

The directory where you install the JDK is referred to in this documentation as *JAVA\_HOME*.

---

**Note.** Spaces are not allowed in the *JAVA\_HOME* name.

---

## Task 2-1-3: Installing Oracle WebLogic on Microsoft Windows

The following procedure assumes that you saved the installation file `fmw_12.2.1.0.0_wls.jar` from Oracle Software Delivery Cloud in the directory *WLS\_INSTALL*. Installation in GUI mode is normally used for Microsoft Windows operating systems. You should have installed the appropriate JDK to *JAVA\_HOME* before beginning this installation.

See Installing JDK for Oracle WebLogic.

---

**Note.** Previous releases of Oracle WebLogic Server, such as 9.2 MPX, and 10.3.X, can coexist with 12.2.1 on a single machine. The best practice is to install Oracle WebLogic 12.2.1 into an empty directory, or at least one that does not contain other Oracle WebLogic (previously BEA) products.

If you choose, however, to install this version of Oracle WebLogic in an existing *WLS\_HOME* directory (for example, *c:\oracle*), you must shut down all instances of Oracle WebLogic Server running in that *WLS\_HOME* before performing this installation.

---

To install Oracle WebLogic Server 12.2.1:

1. Open a command prompt and change directory to *WLS\_INSTALL*.

---

**Note.** If you are running on a Microsoft Windows operating system, you must run the command prompt as administrator.

---

2. Set the environment variable *JAVA\_HOME* to be the location where you installed the Oracle Java JDK 1.8.

For example, if you installed JDK to *D:\jdk1.8.0\_65* use this command:

```
set JAVA_HOME=D:\jdk1.8.0_65
```

3. Use the following command to launch the installer:


```
%JAVA_HOME%\bin\java -jar fmw_12.2.1.0.0_wls.jar
```

---

**Note.** It may take up to five minutes to extract the installer. You see system check messages during the extraction process. The Welcome window appears when the extraction is complete.

---


4. Click Next on the Welcome window for Oracle Fusion Middleware 12c (12.2.1.0.0) WebLogic Server and Coherence Installer.

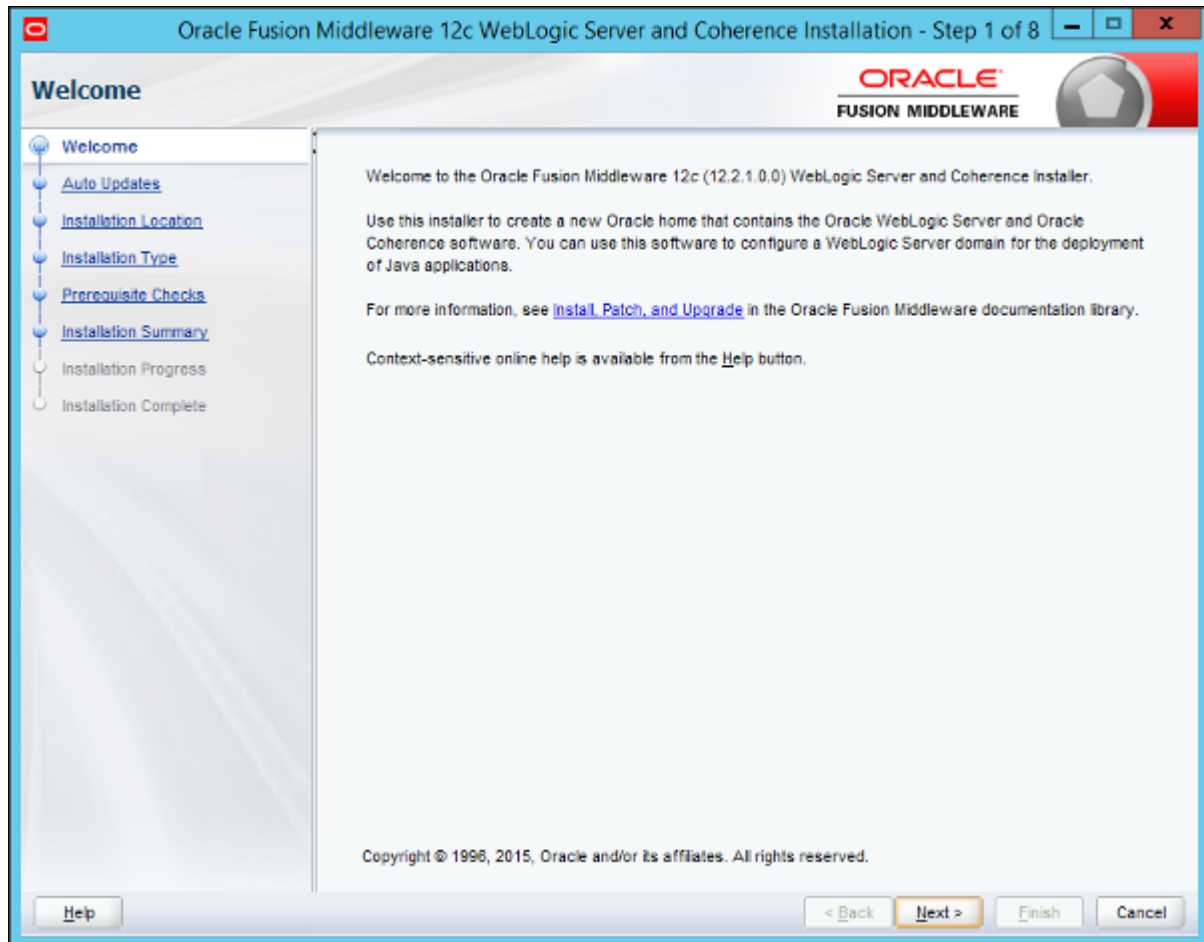

Oracle Fusion Middleware 12c WebLogic Server and Coherence Installation - Step 1 of 8



- 5. Select the Skip Auto Updates radio button.

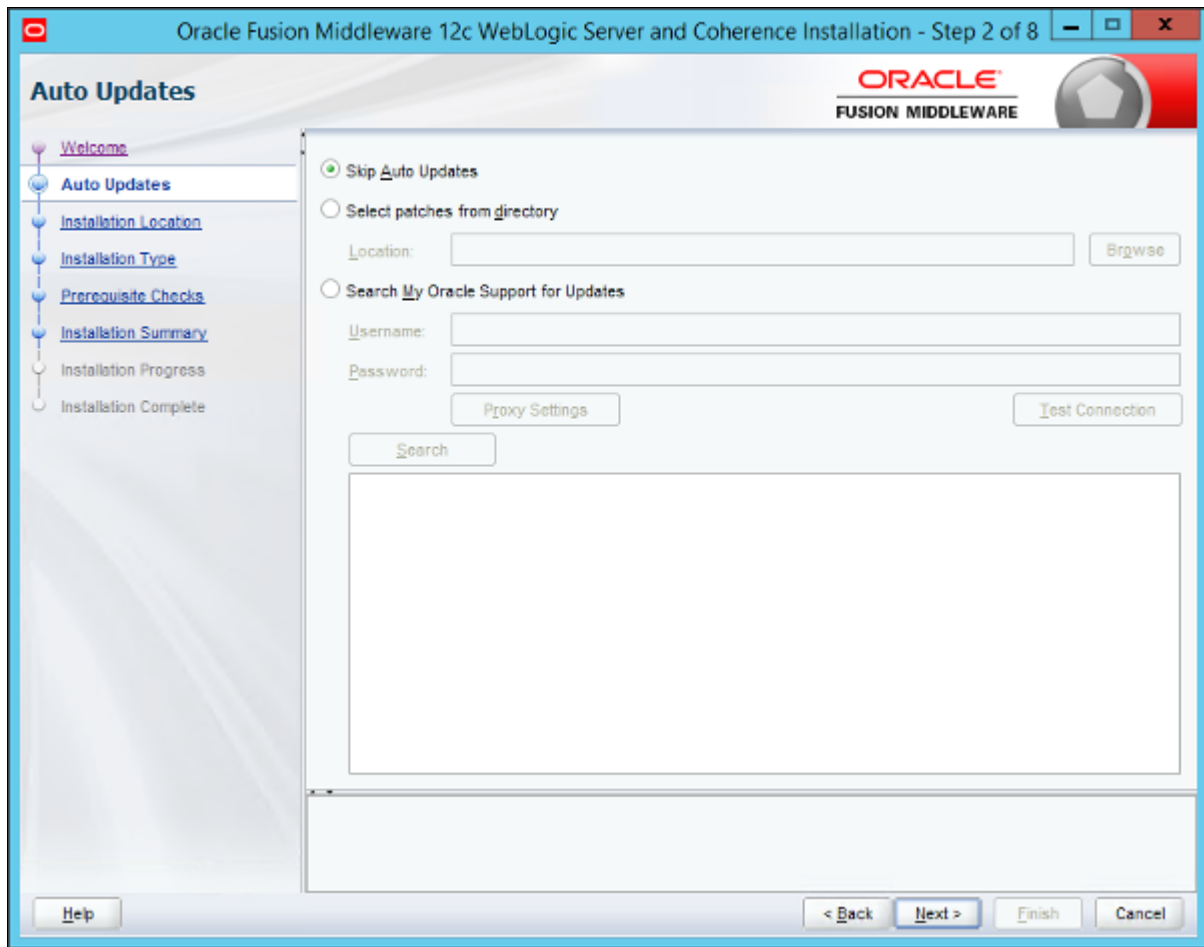


Oracle Fusion Middleware 12c WebLogic Server and Coherence Installation - Step 2 of 8

6. On the Installation Location window, enter a location for the Oracle Home, or browse to an existing directory. Do not choose a directory that contains an existing installation of Oracle WebLogic.


If the directory does not exist, the Oracle WebLogic installer creates it. The directory where you install Oracle WebLogic is referred to as *WLS\_HOME* in this documentation. In this example *WLS\_HOME* is C:\WLS1221.

Click Next to continue.

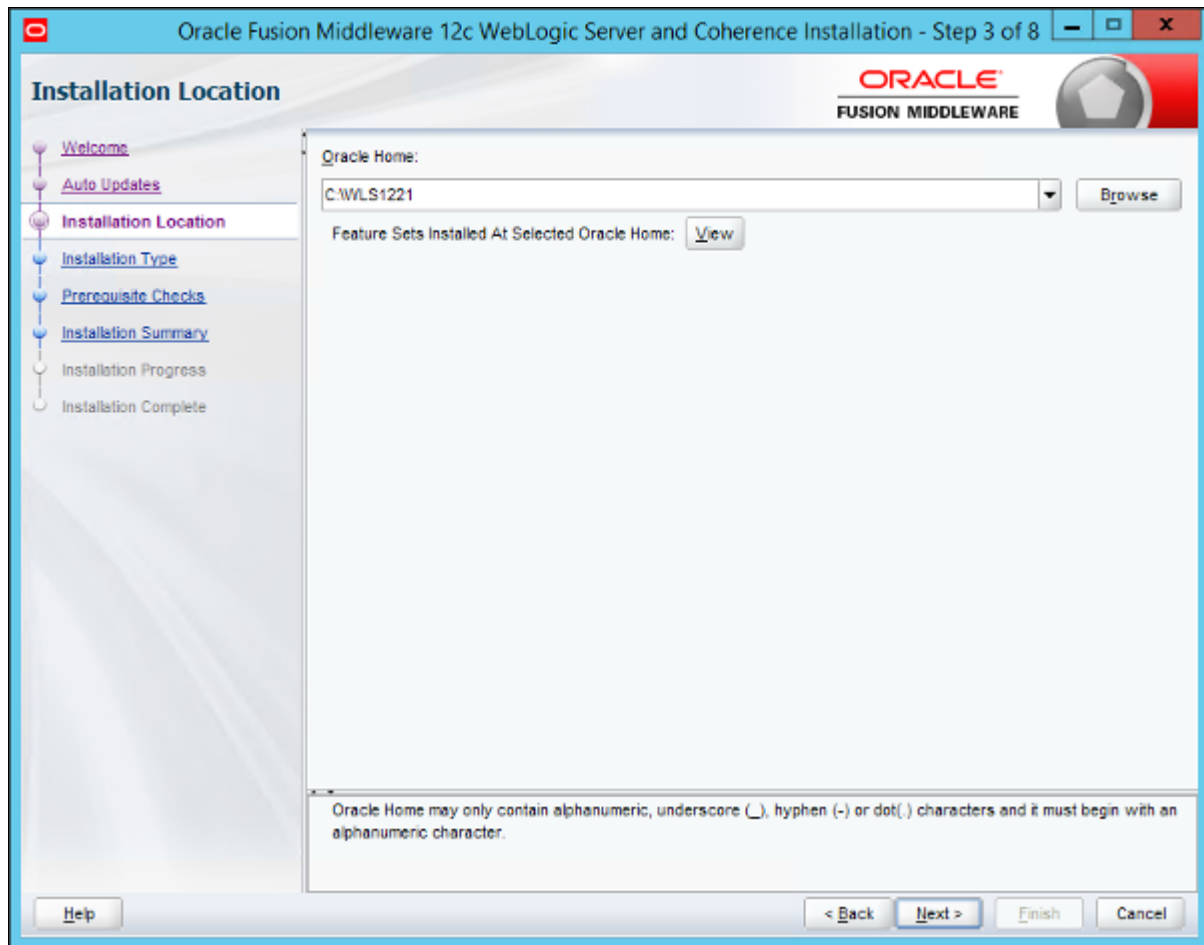

Oracle Fusion Middleware 12c WebLogic Server and Coherence Installation - Step 3 of 8


7. Accept the default WebLogic Server installation option on the Installation Type window, for WebLogic Server Installation, and then click Next.

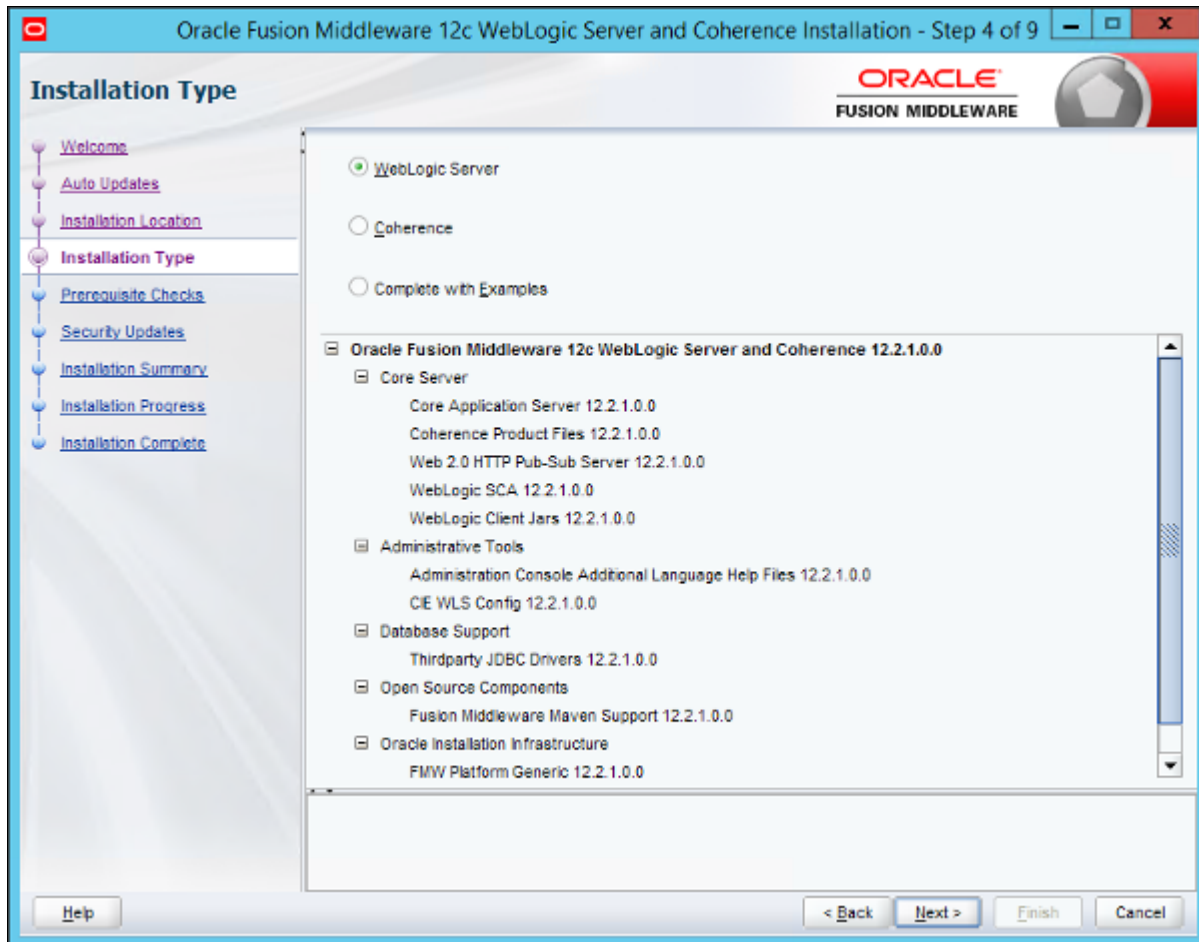

Oracle Fusion Middleware 12c WebLogic Server and Coherence Installation - Step 4 of 9


8. Wait while the installer carries out prerequisite checks, and then click Next.

In this example the system passed the prerequisite checks.

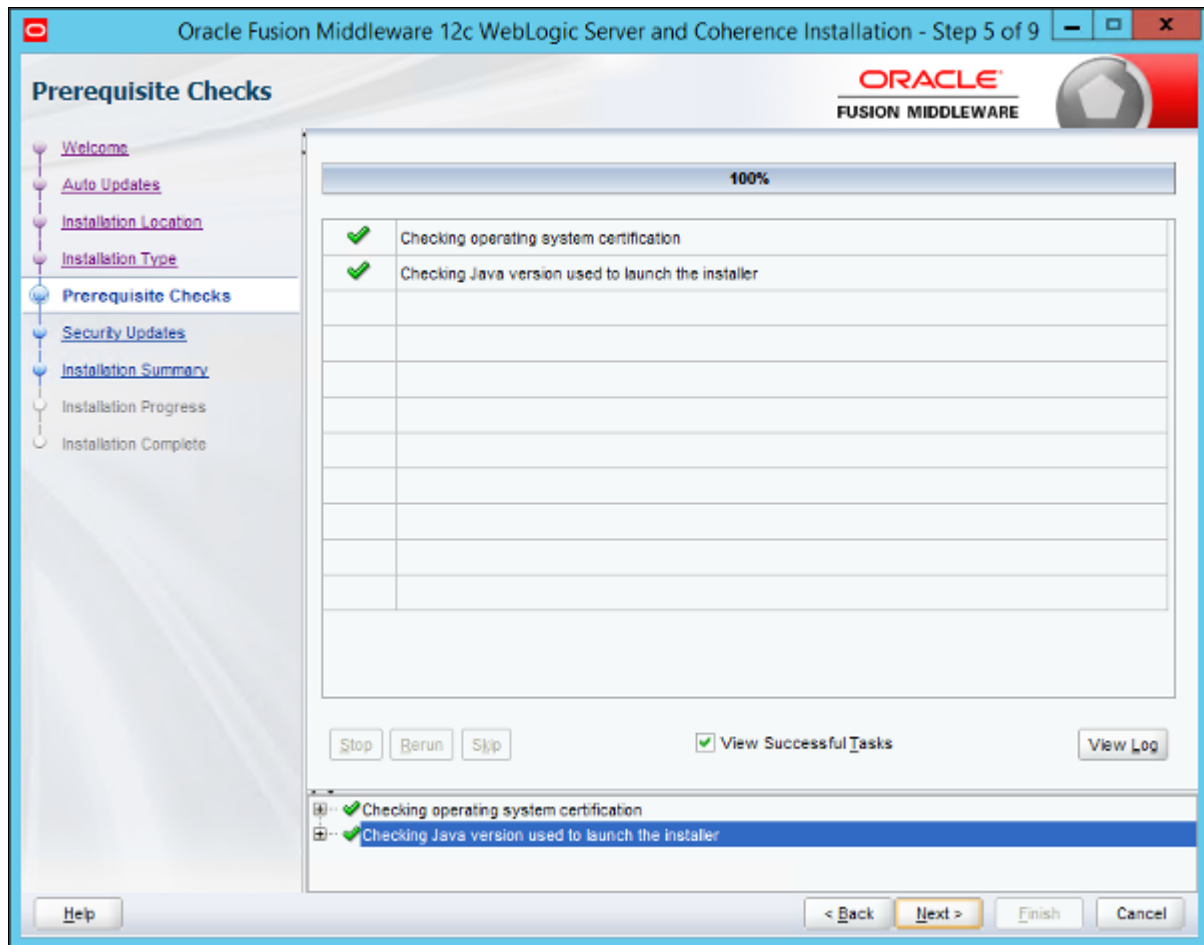


Oracle Fusion Middleware 12c WebLogic Server and Coherence Installation - Step 5 of 9

9. Clear the option I wish to receive security updates via My Oracle Support on the Specify Security Updates window, as shown in this example.

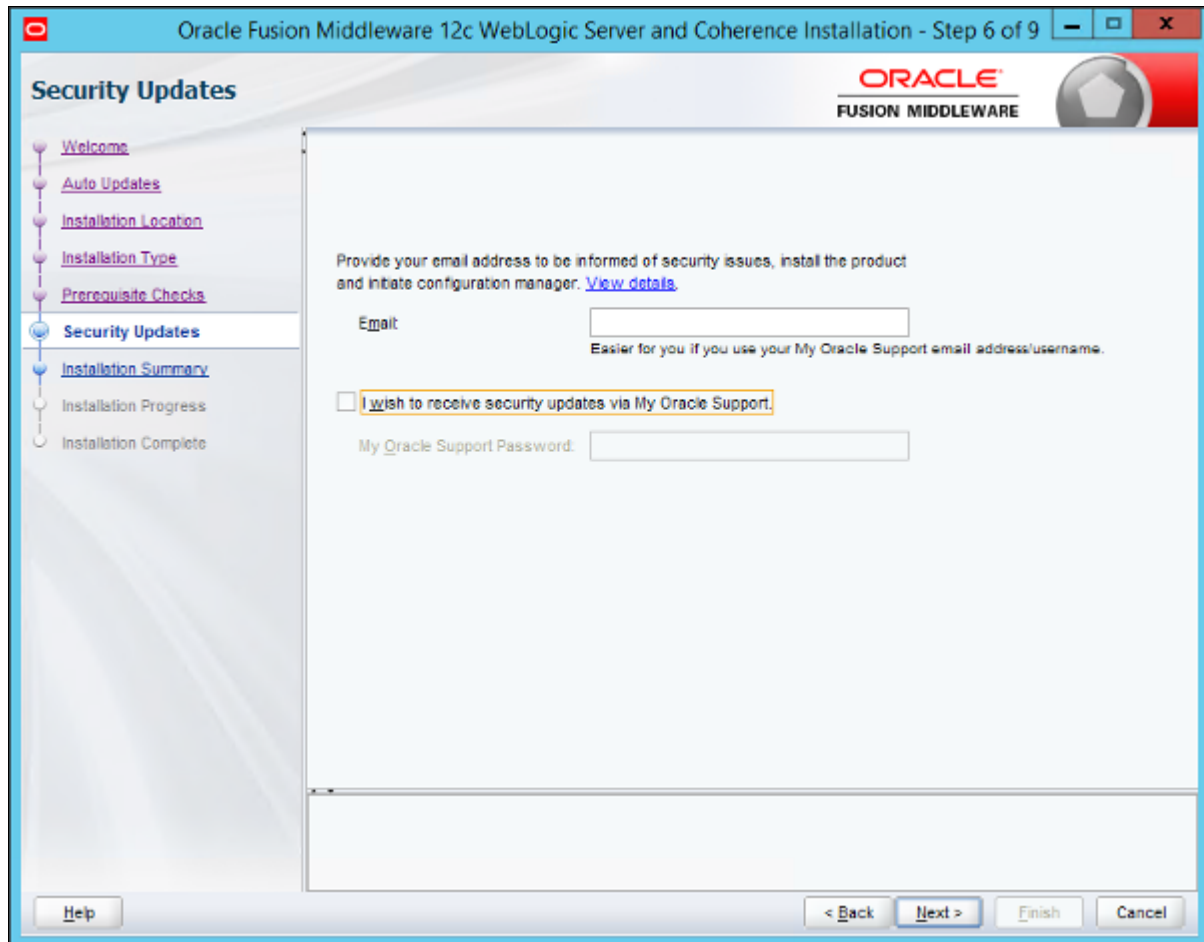

Oracle Fusion Middleware 12c WebLogic Server and Coherence Installation - Step 6 of 9

10. A dialog box labelled "My Oracle Support Username/Email Address Not Specified" appears; click Yes to confirm that you wish to remain uninformed of critical security issues in your configuration:

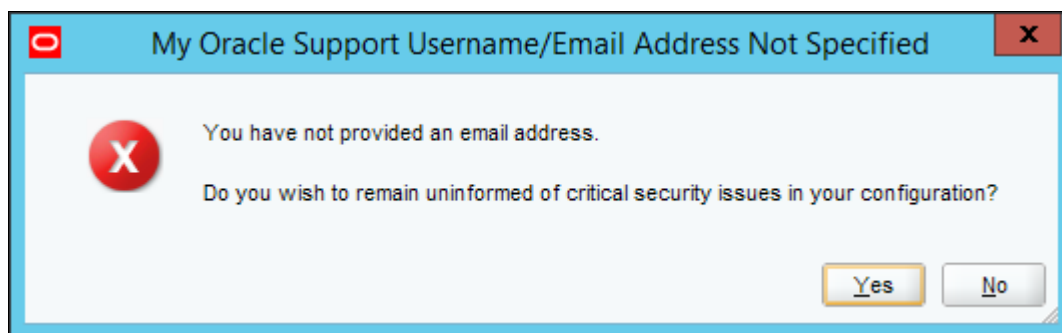


My Oracle Support Username/Email Address Not Specified dialog box

11. Verify your choices in the installation summary, such as the installation location and features to install.


If you want to save a response file to be used in silent installation, click Save Response File and provide a location.

Click Install to begin the installation.

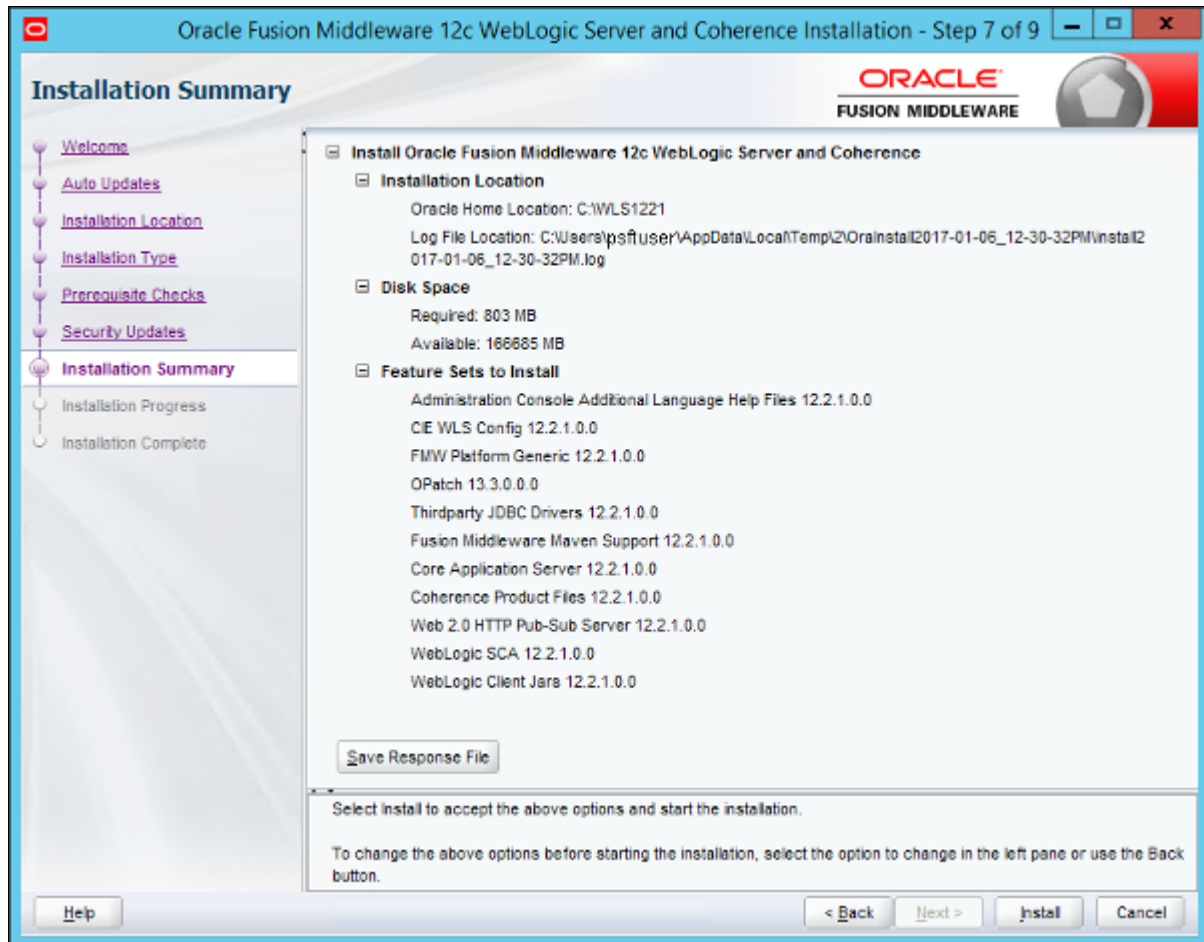


Oracle Fusion Middleware 12c WebLogic Server and Coherence Installation - Step 7 of 9

A progress indicator appears. Click Next when the tasks are complete, as shown in this example:

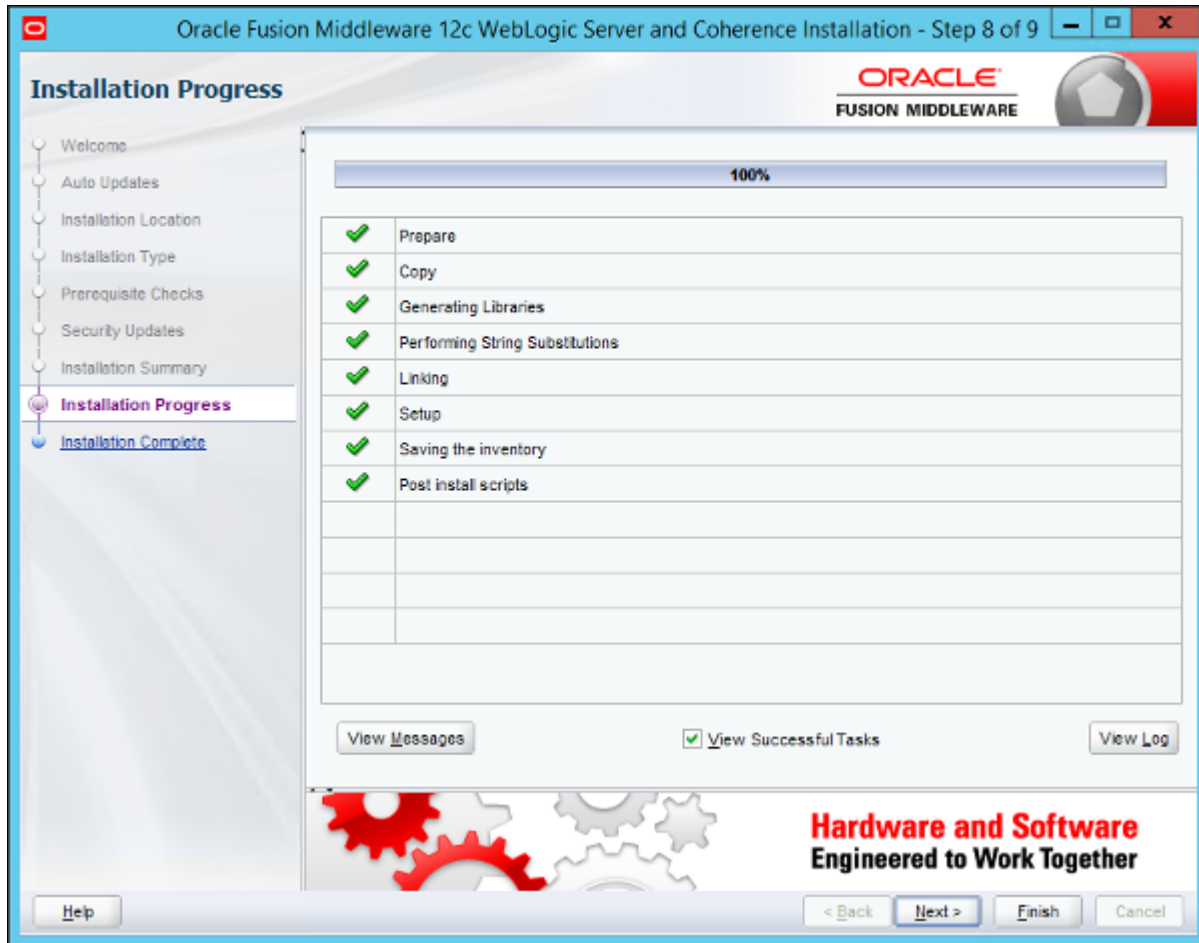

Oracle Fusion Middleware 12c WebLogic Server and Coherence Installation - Step 8 of 9

12. When the installation has completed successfully, clear the Automatically Launch the Configuration Wizard option, and click Finish.

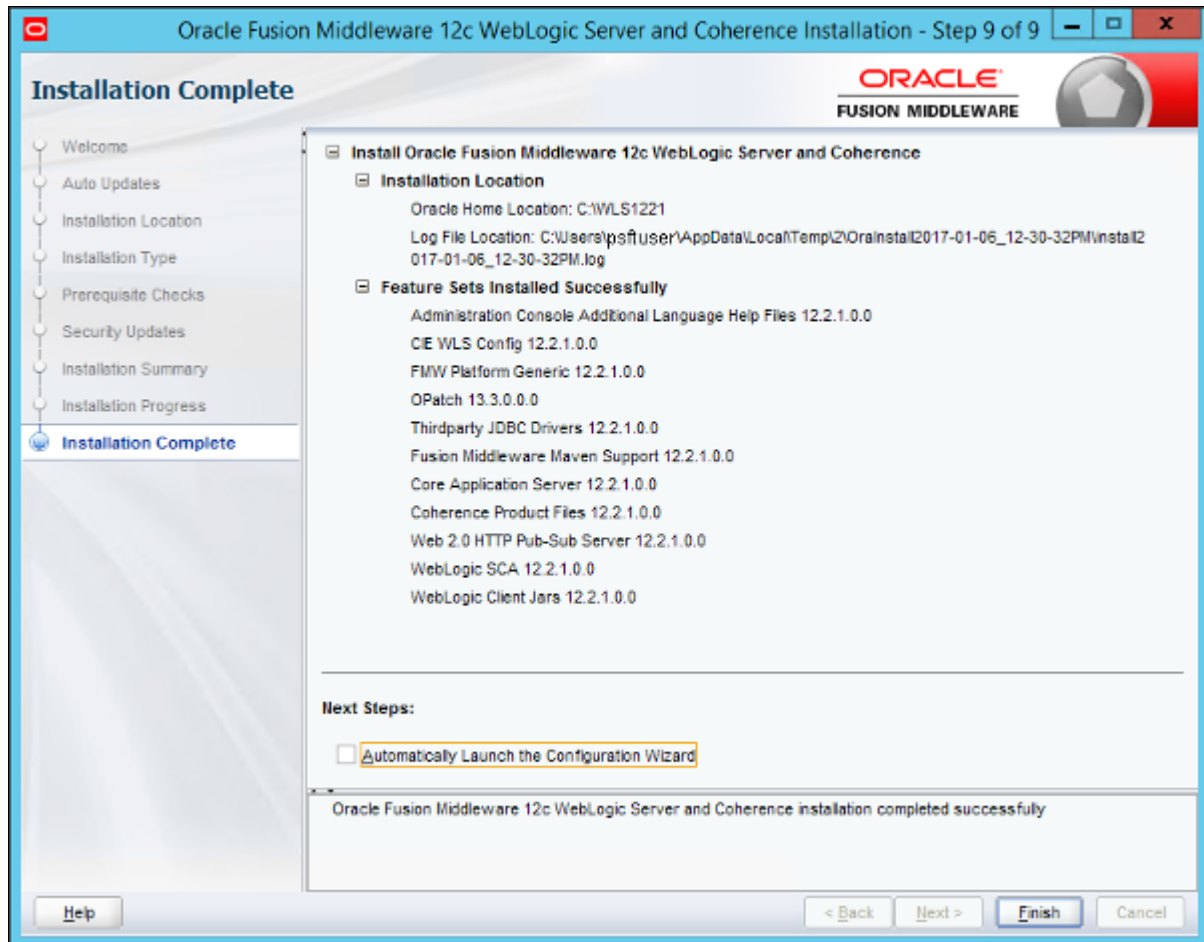

Oracle Fusion Middleware 12c WebLogic Server and Coherence Installation - Step 9 of 9

## Task 2-1-4: Installing Oracle WebLogic on Linux or UNIX in Silent Mode

Use these instructions for silent mode installation for Linux and UNIX operating systems.

**Note.** Console mode installation is not supported for Oracle WebLogic 12.2.1.

See the information on silent installation for Oracle WebLogic in the Oracle Middleware documentation.

The following procedure assumes that you saved the installation file `fmw_12.2.1.0.0_wls.jar` from Oracle Software Delivery Cloud in the directory `WLS_INSTALL`. You should have installed the appropriate JDK to `JAVA_HOME` before beginning this installation.

**Note.** If you downloaded the zip file for the Oracle WebLogic installation from Oracle Software Delivery Cloud to a Microsoft Windows computer, FTP the zip file in binary mode to your Linux or Oracle Solaris computer before unzipping it into `WLS_INSTALL`.

To run the Oracle WebLogic installation in silent mode:

1. Change directory to `WLS_INSTALL` and make the installer file executable using the following command:  

```
chmod a+x fmw_12.2.1.0.0_wls.jar
```



2. In a shell window, change directory to *WLS\_INSTALL*:

```
cd WLS_INSTALL
```

3. Set *JAVA\_HOME* to be the location where you installed the JDK.

For example, if the JDK is installed under *"/home/jdklnk8u65"*, use the following command:

```
export JAVA_HOME=/home/jdklnk8u65
```

4. If it does not exist, use a text editor, such as "vi", to create the central inventory location file, named *oraInst.loc*, in a directory referred to in this documentation as *INVENTORY\_DIR*.

The *oraInst.loc* file contains only the following two lines:

```
inventory_loc=/home/psftuser/oraInventory
inst_group=wlsgrp
```

The *oraInst.loc* file contains the following information:

- *inventory\_loc* — Specify the full path to the directory where you want the installer to create the inventory directory. The location in the example is */home/psftuser/oraInventory*. Use any directory other than the *WLS\_INSTALL* directory where you placed the *fmw\_12.2.1.0.0\_wls.jar* file.
  - *oui\_install\_group* — Specify the name of the group whose members have write permissions to this directory. The group name in the example is *wlsgrp*.
5. Copy the following content into a text editor and save it as *res.rsp*.

This is the silent response file. The directory where you save it is referred to here as *RESPONSE\_DIR*.

```
[ENGINE]
```

```
#DO NOT CHANGE THIS.
```

```
Response File Version=1.0.0.0.0
```

```
[GENERIC]
```

```
#Set this to true if you wish to skip software updates
DECLINE_AUTO_UPDATES=true
```

```
#
MOS_USERNAME=
```

```
#
MOS_PASSWORD=<SECURE VALUE>
```

```
#If the Software updates are already downloaded and available on your⇒
local system, then specify the path to the directory where these⇒
patches are available and set SPECIFY_DOWNLOAD_LOCATION to true
AUTO_UPDATES_LOCATION=
```

```
#
SOFTWARE_UPDATES_PROXY_SERVER=
```

```
#
SOFTWARE_UPDATES_PROXY_PORT=
```

```
#
```

```

SOFTWARE_UPDATES_PROXY_USER=

#
SOFTWARE_UPDATES_PROXY_PASSWORD=<SECURE VALUE>

#The oracle home location. This can be an existing Oracle Home or a new⇒
Oracle Home
ORACLE_HOME=

#Set this variable value to the Installation Type selected. e.g. Web⇒
Logic Server, Coherence, Complete with Examples.
INSTALL_TYPE=WebLogic Server

#Provide the My Oracle Support Username. If you wish to ignore Oracle⇒
Configuration Manager configuration provide empty string for user name.
MYORACLESUPPORT_USERNAME=

#Provide the My Oracle Support Password
MYORACLESUPPORT_PASSWORD=<SECURE VALUE>

#Set this to true if you wish to decline the security updates. Setting⇒
this to true and providing empty string for My Oracle Support username⇒
will ignore the Oracle Configuration Manager configuration
DECLINE_SECURITY_UPDATES=true

#Set this to true if My Oracle Support Password is specified
SECURITY_UPDATES_VIA_MYORACLESUPPORT=false

#Provide the Proxy Host
PROXY_HOST=

#Provide the Proxy Port
PROXY_PORT=

#Provide the Proxy Username
PROXY_USER=

#Provide the Proxy Password
PROXY_PWD=<SECURE VALUE>

#Type String (URL format) Indicates the OCM Repeater URL which should⇒
be of the format [scheme[Http/Https]]://[repeater host]:[repeater port]
COLLECTOR_SUPPORTHUB_URL=

```

6. Use a text editor to enter the full path for `ORACLE_HOME`; for example:

```

#The oracle home location. This can be an existing Oracle Home or a new⇒
Oracle Home
ORACLE_HOME=/home/wls1221

```

Oracle WebLogic will be installed into the `ORACLE_HOME` directory entered here. This must be a new directory; do not enter a directory that has been used previously.

7. If this is the first time you are installing on your system (meaning there is no pre-existing Oracle inventory location), use the following commands to perform a silent installation.

These commands use `res.rsp` as the name for the response file.

- For IBM AIX, Linux, or Oracle Solaris (on SPARC or x86-64):

```
$JAVA_HOME/bin/java -jar ./fmw_12.2.1.0.0_wls.jar -silent -response⇒
File RESPONSE_DIR/res.rsp -invPtrLoc INVENTORY_DIR/oraInst.loc
```

- For HP-UX Itanium, the JVM parameter "-d64" is required:

```
$JAVA_HOME/bin/java -d64 -jar ./fmw_12.2.1.0.0_wls.jar -silent -⇒
responseFile RESPONSE_DIR/res.rsp -invPtrLoc INVENTORY_DIR/ora⇒
Inst.loc
```

8. If you have previously installed an Oracle product on your system and do not need to specify an Oracle inventory location, use the following commands to perform a silent installation:

- For IBM AIX, Linux, or Oracle Solaris (on SPARC or x86-64):

```
$JAVA_HOME/bin/java -jar ./fmw_12.2.1.0.0_wls.jar -silent -response⇒
File RESPONSE_DIR/res.rsp
```

- For HP-UX Itanium, the JVM parameter "-d64" is required:

```
$JAVA_HOME/bin/java -d64 -jar ./fmw_12.2.1.0.0_wls.jar -silent -⇒
responseFile RESPONSE_DIR/res.rsp
```

9. After you enter the appropriate command from the previous steps, the installer is launched in silent mode, and a progress indicator tracks the installation.

When the installation is complete, you should see a completion message such as "The installation of Oracle Fusion Middleware 12c WebLogic Server and Coherence 12.2.1.0.0 completed successfully."

## Task 2-1-5: Configuring JDK for Daylight Savings Time Change

The version of JDK mentioned in the previous section Installing JDK for Oracle WebLogic includes the Daylight Saving Time (DST) rules available at the time of packaging. If new rules are implemented after this time, you should use the instructions in this section to update the time zone definition files.

You can skip this section unless a change to the DST rules has happened near or after the general availability date of Oracle WebLogic or PeopleSoft PeopleTools. Consult the information on configuring PeopleSoft time zone definitions in the *PeopleTools: Global Technology* product documentation.

This section provides an example of how the time zone updater utility (TZUPDATER), which is supplied by the JDK vendors, can be used to update the time zone definition files contained in the JDK used by Oracle WebLogic server.

1. Identify and shut down any JVM processes that are using the JDK that you will be updating.
2. For future reference or restoration, back up the location where the targeted JDK is located.

The JDK being used for different operating systems is different. For Oracle WebLogic 12.2.1.0.0, refer to the `commBaseEnv.cmd` (for Microsoft Windows), or `commBaseEnv.sh` (for UNIX) file under `WLS_HOME\oracle_common\common\bin` to determine the setting for `JAVA_HOME` and the exact name and location for the JDK being used by your Oracle WebLogic server. `WLS_HOME` is the directory where Oracle WebLogic is installed.

3. Download the appropriate updater utility for your operating system from the JDK vendor.

Each tzupdater provided by the vendor comes with instructions (typically in a readme file) describing how to:

- Locate the correct JDK.
- Apply classes using the tzupdater or provided scripts.
- Check tzupdater versions.

Read the instructions carefully as the steps and instructions are vendor-specific. Keep in mind that these instructions and versions may be updated when the vendor finds it necessary.

---

**Note.** After successfully running the TZUPDATER to update a JDK location, the changes will take effect only for newly started Java processes from that location. In the event that you did not identify and stop all Java processes running from this location, it will be necessary to stop and restart these for the changes to take effect.

---

## See Also

Timezone Updater Tool, Oracle Technology Network, <http://www.oracle.com/technetwork/java/javase/tzupdater-readme-136440.html>


## Task 2-1-6: Removing the Oracle WebLogic Installation on Microsoft Windows

To remove the Oracle WebLogic installation on Microsoft Windows (GUI mode):

1. Before running the deinstaller, stop all servers and processes associated with the Oracle home you are going to remove.


2. Change directory to the `WLS_HOME\oui\bin` folder and run the `deinstall.cmd` script.

`WLS_HOME` is the location where you installed your Oracle WebLogic 12.2.1.0.0, for example `C:\WLS1221`. Click Next on the Welcome window.

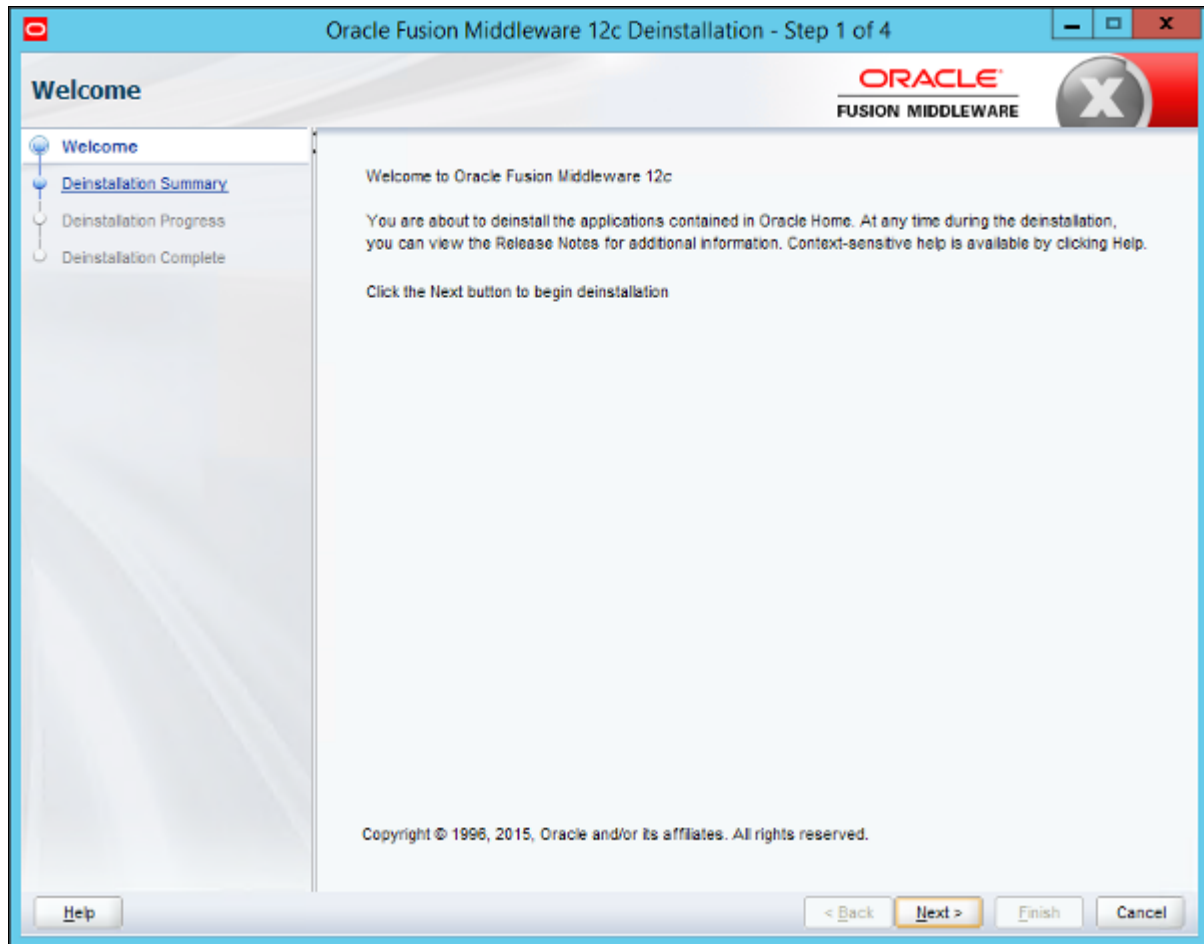

Oracle Fusion Middleware 12c Deinstallation - Step 1 of 4

3. Verify the components that you want to uninstall on the summary page (by default all components are selected as shown in this example).

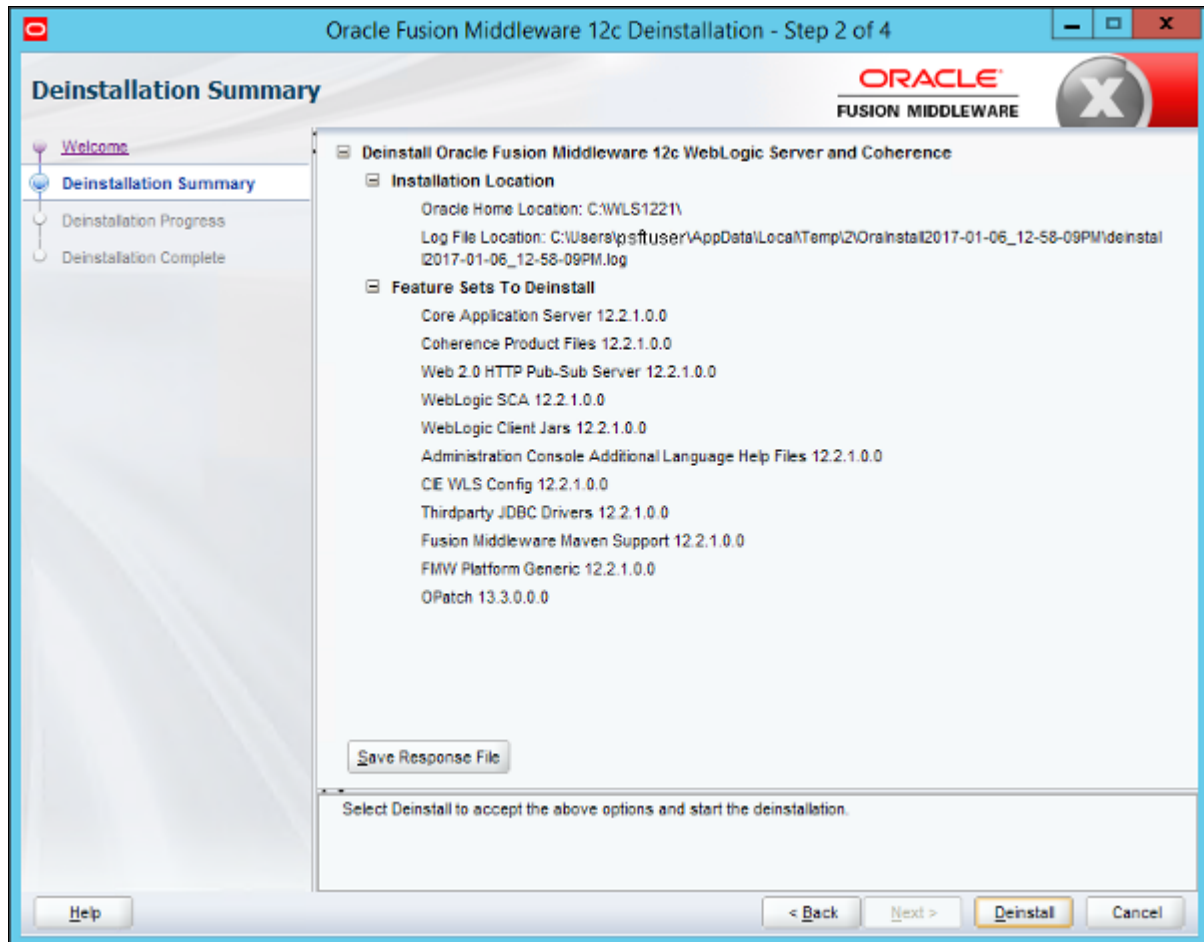


Oracle Fusion Middleware 12c Deinstallation - Step 2 of 4

4. Click the Save Response File button and browse to a location to save the file, which you can use for a silent mode deinstallation.


See Removing the Oracle WebLogic Installation on UNIX or Linux.

Click Deinstall. A progress indicator appears. Click Next when the tasks are complete, as shown in this example.

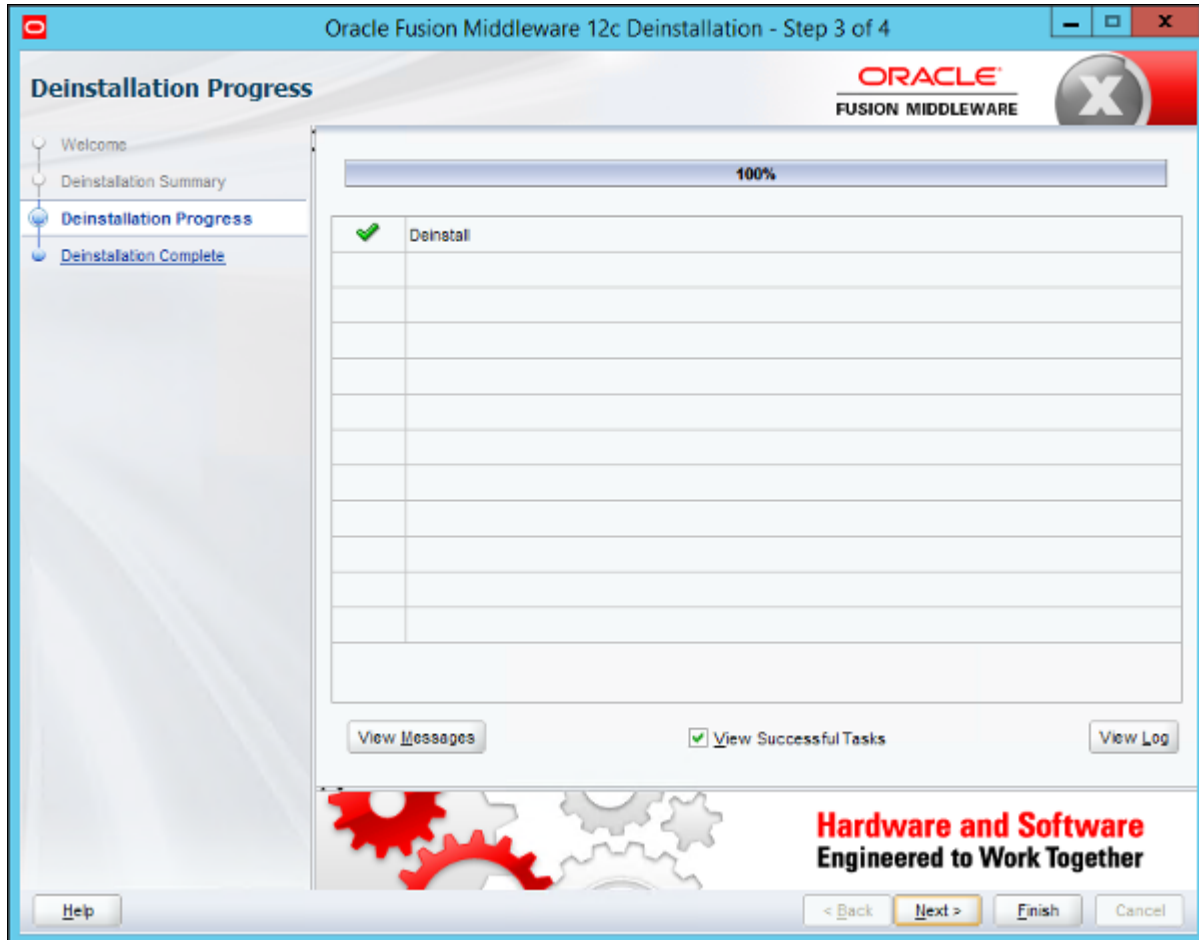

Oracle Fusion Middleware 12c Deinstallation - Step 3 of 4

- Click Finish on the Deinstallation Complete window.

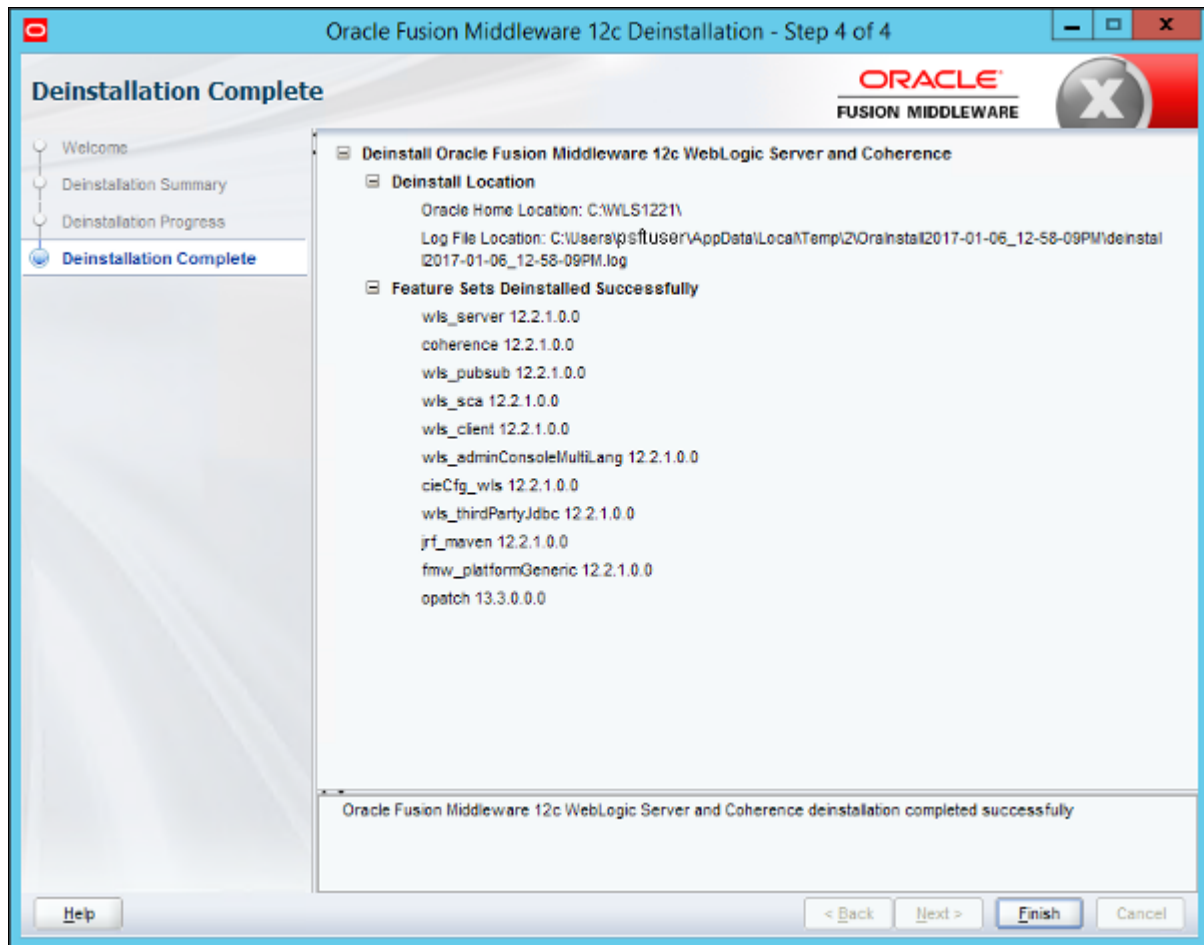

Oracle Fusion Middleware 12c Deinstallation - Step 4 of 4

- Remove the *WLS\_HOME* directory manually after the deinstallation.

## Task 2-1-7: Removing the Oracle WebLogic Installation on Linux or UNIX

To remove the installation on Linux or UNIX, you run in console mode, and use a response file.

**Note.** The previous section, Removing the Oracle WebLogic Installation on Microsoft Windows, included a step in which you saved a response file. You can edit and use this response file for different operating system platforms.

To remove the Oracle WebLogic installation on UNIX or Linux in silent mode:

- Before running the deinstaller, stop all servers and processes associated with the Oracle home you are going to remove.
- If you need to create a response file, copy the following content into a text editor and save it.

This is the silent response file, referred to here as *RESPONSE\_DIR/response.txt*.

```
[ENGINE]
```

```
#DO NOT CHANGE THIS.
```



```
Response File Version=1.0.0.0.0
```

```
[GENERIC]
```

```
#This will be blank when there is nothing to be de-installed in⇒  
distribution level
```

```
SELECTED_DISTRIBUTION=WebLogic Server~12.2.1.0.0
```

```
#The oracle home location. This can be an existing Oracle Home or a new⇒  
Oracle Home
```

```
ORACLE_HOME=
```

3. Edit the `ORACLE_HOME` line to add the location where you installed Oracle WebLogic 12.2.1.0.0; for example:

```
#The oracle home location. This can be an existing Oracle Home or a new⇒  
Oracle Home
```

```
ORACLE_HOME=/home/wls1221
```

4. Change directory to `WLS_HOME/oui/bin` and locate the `deinstall.sh` script.

`WLS_HOME` is the location where you installed your Oracle WebLogic 12.2.1.0.0.

5. Run the following command.

For `INVENTORY_DIR`, specify the full directory path containing the Oracle installer inventory file, `oraInst.loc`.

See *Installing Oracle WebLogic on Linux or UNIX in Silent Mode*.

```
./deinstall.sh -silent -response RESPONSE_DIR/response.txt -invPtrLoc ⇒  
INVENTORY_DIR/oraInst.loc
```

6. An indicator shows the progress of the removal process, followed by a completion message such as "The uninstall of Oracle Fusion Middleware 12c WebLogic Server and Coherence 12.2.1.0.0 completed successfully."
7. Remove the `WLS_HOME` directory manually to complete the deinstallation.

## **Task 2-2: Installing IBM WebSphere Application Server**

---

This section discusses:

- Understanding IBM WebSphere Installation
- Prerequisites
- Obtaining IBM WebSphere Installation Files
- Installing IBM WebSphere 9.0.0.0 ND
- Installing IBM HTTP Server 9.0.0.0
- Installing IBM WebSphere Plug-ins 9.0.0.0

## Understanding IBM WebSphere Installation

Oracle supports 64-bit IBM® WebSphere® Application Server Network Deployment 9.0.0.0 (referred to as IBM WebSphere ND in this documentation) for PeopleSoft PeopleTools 8.56. The IBM WebSphere ND requires IBM Runtime Environment, Java Technology Edition 8.

IBM WebSphere Application Server supports IBM HTTP server (IHS) as a HTTP Reverse Proxy server. IBM WebSphere Application Server alone cannot act as a proxy server for PeopleSoft PeopleTools REN Server. You must also install PeopleSoft Pure Internet Architecture, as well as installing the IBM HTTP server. Consult My Oracle Support for information on the versions of IHS certified for use with PeopleSoft PeopleTools.

This section includes guidelines for installing IBM WebSphere ND, the Web server plug-ins for IBM WebSphere Application Server, and IHS. For detailed installation instructions, see the IBM documentation.

### See Also

My Oracle Support, Certifications

Clustering and High Availability for PeopleTools, My Oracle Support, (search for the article name)

IBM WebSphere Application Server Information Center,  
<http://pic.dhe.ibm.com/infocenter/wasinfo/v8r5/index.jsp>

### Prerequisites

IBM WebSphere ND is certified for PeopleSoft PeopleTools 8.56 on the following operating systems:

- IBM AIX
- HP-UX Itanium
- Linux
- Microsoft Windows
- Oracle Solaris

The full lists of prerequisites for IBM WebSphere Application Server Network Deployment 9.0.0.0 are available on the IBM website:

See <http://www-01.ibm.com/support/docview.wss?uid=swg27006921#9.0>

In addition, review the following prerequisites before beginning your installation:

- Both IBM WebSphere ND and PeopleSoft Pure Internet Application (PIA) need to be installed and deployed using the same user ID. Following this requirement avoids security and profile management issues.
- On Microsoft Windows operating systems, if you are not using the built-in administrator account to run the commands, you will need stronger user account privileges to carry out the installation of IBM Installation Manager.

To set the appropriate privileges, right-click the installer and select Run as administrator. Do the same thing for the installation of IBM Installation Manager.

- On UNIX platforms, the /var file system is used to store all the security logging information for the system. Therefore it is critical that you maintain free space in /var for these operations.
- When you carry out the GUI mode installation on UNIX, executing the installation wizard launches a GUI window. You must run this command from an X-Windows client window (for example, Reflection-X).
- PeopleSoft PeopleTools 8.56 supports the IBM HTTP Server (IHS) 9.0.0.0 that is bundled with the IBM

WebSphere 9.0.0.0 installation. Use of an external remote proxy server (RPS) is optional.

## Task 2-2-1: Obtaining IBM WebSphere Installation Files

For the current PeopleSoft PeopleTools release, the installation files for IBM WebSphere are not packaged with PeopleSoft PeopleTools on Oracle Software Delivery Cloud. To download the necessary files for the IBM WebSphere installation, contact IBM. The installation of IBM WebSphere 9.0.0.0 requires the download of the following components:

- IBM Installation Manager V1.8.5 or later
- WebSphere Application Server Network Deployment V9.0.0.0 64-bit
- Application Client for WebSphere Application Server
- IBM HTTP Server V9.0.0.0 64-bit
- Plug-ins V9.0.0.0 64-bit
- IBM SDK V8.0.3.10

The distribution is provided as operating-system-specific zip files. Download and extract the appropriate zip files for your operating system. The base binaries of IBM WebSphere 9.0.0.0, IHS 9.0.0.0, and Plug-in 9.0.0.0 have to be downloaded by providing an IBM partner ID and password.

## Task 2-2-2: Installing IBM WebSphere 9.0.0.0 ND

For detailed information on installing IBM WebSphere 9.0.0.0 ND, see the documentation on the IBM web site. See the previous section, Obtaining IBM WebSphere Installation Files, for the installation file names for your operating system. The installation of IBM WebSphere Application Server Network includes the following steps:

1. Install IBM Installation Manager V1.8.5 or later
2. Install IBM WebSphere 9.0.0.0 64-bit
3. Install IBM WebSphere SDK Java (TM) Technology Edition V8.0.3.10

## Task 2-2-3: Installing IBM HTTP Server 9.0.0.0

For detailed information on installing IHS 9.0.0.0, see the documentation on the IBM web site. See the previous section, Obtaining IBM WebSphere Installation Files, for the installation file names for your operating system.

To install IHS 9.0.0.0 64-bit, use IBM Installation Manager.

## Task 2-2-4: Installing IBM WebSphere Plug-ins 9.0.0.0

For detailed information on installing the Web server plug-ins for IBM WebSphere Application Servers, see the documentation on the IBM web site. See the earlier section, Obtaining IBM WebSphere Installation Files, for the installation file names for your operating system.

To install the IBM Plug-ins 9.0.0.0 64-bit for IBM WebSphere Application Servers, use IBM Installation Manager.



## Chapter 3

# Installing Additional Components

This chapter discusses:

- Reviewing Additional Components
- Installing Oracle Tuxedo

## Reviewing Additional Components

---

Depending upon your PeopleSoft installation environment, you may need to install and configure software components that are not included with the PeopleSoft PeopleTools installation files, or which you acquire from vendors other than Oracle. Some of the components that are discussed in this installation guide include:

- Oracle Tuxedo

The installation of Oracle Tuxedo is required for a basic PeopleSoft PeopleTools installation, and is covered in this chapter.

- COBOL

COBOL is not needed for PeopleSoft PeopleTools or for PeopleSoft Applications that contain no COBOL programs. Check My Oracle Support for details about whether your application requires COBOL.

See "PeopleSoft Enterprise Frequently Asked Questions About PeopleSoft and COBOL Compilers," My Oracle Support, Doc ID 747059.1.

See "PeopleSoft Enterprise Frequently Asked Questions About PeopleSoft and the IBM COBOL Compiler," My Oracle Support, Doc ID 1211907.1.

The installation and configuration of Micro Focus and IBM COBOL compilers are covered in later chapters.

See "Installing and Configuring COBOL on UNIX."

See "Installing and Configuring COBOL on Windows."

- Elasticsearch

Elasticsearch is the search engine for the PeopleSoft Search Framework for the current release. Oracle provides Elasticsearch as deployment packages (DPKs) for Microsoft Windows and Linux that deliver the required Elasticsearch software version, Java-based plug-ins needed for integration with PeopleSoft environments, and customized code where required. Be sure to obtain and use the Elasticsearch DPKs provided for use with the PeopleSoft installation.

See Elasticsearch Home Page, My Oracle Support, Doc ID 2205540.2.

---

**Note.** Oracle Secure Enterprise Search (SES) and Verity are not supported for the current release.

---

**Note.** Use the My Oracle Support Certifications area to determine the latest certified versions of additional components that are supported for the PeopleSoft PeopleTools release you are installing.

---

## Task 3-1: Installing Oracle Tuxedo

---

This section discusses:

- Understanding Oracle Tuxedo
- Prerequisites
- Debugging the Oracle Tuxedo Installer
- Obtaining the Oracle Tuxedo Installation Files from Oracle Software Delivery Cloud
- Obtaining the Oracle Tuxedo Patches from My Oracle Support
- Removing Existing Oracle Tuxedo Installations from Microsoft Windows (Optional)
- Designating the Application Server Administrator on Microsoft Windows
- Installing Oracle Tuxedo on Microsoft Windows in GUI Mode
- Installing the Oracle Tuxedo Patch on Microsoft Windows
- Installing Oracle Tuxedo on Microsoft Windows in Silent Mode
- Uninstalling the Oracle Tuxedo Patch on Microsoft Windows
- Uninstalling Oracle Tuxedo in GUI Mode
- Checking the Windows Service Account
- Restricting Domain Process Privileges
- Setting Up the Windows Services for Oracle Tuxedo
- Verifying the Server Installation on Microsoft Windows
- Removing Existing Oracle Tuxedo Installations from UNIX (Optional)
- Completing the Preinstallation Checklist on UNIX
- Designating the Oracle Tuxedo Owner on UNIX
- Installing Oracle Tuxedo in Silent Mode on UNIX
- Installing the Oracle Tuxedo Patch on UNIX
- Uninstalling the Oracle Tuxedo Patch from UNIX
- Uninstalling Oracle Tuxedo from UNIX Using Silent Mode
- Verifying the Server Installation on UNIX
- Ensuring that Oracle Tuxedo Coexists with Earlier Versions

### Understanding Oracle Tuxedo

The PeopleSoft application server uses the Oracle® Fusion Middleware product, Oracle Tuxedo, to perform transaction management, messaging, and administration. This task guides you through the installation of Oracle Tuxedo on your server. It is essential that you install Oracle Tuxedo 64-bit, version 12c Release 2 (12.2.2.0), which is available on Oracle Software Delivery Cloud. You need to install Oracle Tuxedo before you go any further in setting up your application server and your PeopleSoft Pure Internet Architecture. After you perform the installation described here, you will configure the application server environment to incorporate Oracle Tuxedo with the PeopleSoft components.

Oracle supports Oracle Tuxedo 12c Release 2 (64-bit) for Linux or UNIX, and Oracle Tuxedo 12c Release 2 (64-bit) with MS Visual Studios 2015 for Microsoft Windows, with PeopleSoft PeopleTools 8.56.

The minimum patch level certified for running Oracle Tuxedo 12c Release 2 with PeopleSoft PeopleTools 8.56 is Rolling Patch 16 (RP016). These installation instructions include the installation of the base Oracle Tuxedo 12c Release 2, followed by the patch installation.

---

**Note.** Oracle Tuxedo 12c Release 2 for Linux operating systems supports Exalogic optimizations.

For PeopleSoft customers running on Oracle Exalogic Elastic Cloud, we strongly recommend the use of the Exalogic OVM Template for PeopleSoft.

See Oracle's PeopleSoft Virtualization Products, My Oracle Support, Doc ID 1538142.1.

---

**Note.** For the sake of brevity and convenience, this documentation shortens "Oracle Tuxedo 12c Release 2 (64-bit)" to "Oracle Tuxedo 12cR2" and "Oracle Tuxedo 12c Release 2 (64-bit) with MS Visual Studios 2015" to "Oracle Tuxedo 12cR2\_VS2015."

---

If you have a previous version of Oracle Tuxedo installed, you need to install the new version of Oracle Tuxedo, and re-create your application server domains. (You must create your domains using PSADMIN; you cannot migrate existing domains.) You can also use the PSADMIN domain import utility.

You can install Oracle Tuxedo once for each release on a machine, regardless of the number of PeopleSoft applications or databases the server supports. For example, if you installed Oracle Tuxedo 10gR3 for an earlier release of your PeopleSoft application, you may install Oracle Tuxedo 12cR2 on the same machine in a separate directory. For example:

On Microsoft Windows, you may install into C:\oracle\tuxedo10gR3\_VS2008 and C:\oracle\tuxedo12.2.2.0.0\_VS2015.

On UNIX, you may install into /home/oracle/tuxedo10gR3 and /home/oracle/tuxedo12cR2.

If more than one PeopleSoft application uses the same Oracle Tuxedo version (that is, the same patch level), then it is recommended that you have a single installation of Oracle Tuxedo to serve all the supported PeopleSoft applications. A single Oracle Tuxedo installation simplifies future maintenance (such as applying patches). However, if you choose to have more than one Oracle Tuxedo installation (this scenario is possible only on UNIX systems, as Oracle Tuxedo does not allow multiple installations of the same version of Oracle Tuxedo on Microsoft Windows), you must install and maintain the same Oracle Tuxedo version more than once in different directories.

## See Also

Oracle Tuxedo Documentation on Oracle Technology Network,  
<http://www.oracle.com/technetwork/middleware/tuxedo/documentation/index.html>

*PeopleTools: Portal Technology*

*PeopleTools: System and Server Administration*

Operating System, RDBMS, and Additional Component Patches Required for Installation PeopleTools, My Oracle Support (search for article name and select the release)

Clustering and High Availability for PeopleTools, My Oracle Support (search for title)

Using OVM Templates for PeopleSoft on Exalogic, My Oracle Support (search for title)

## Prerequisites

Before you begin to install Oracle Tuxedo, make sure that you have the following resources in place:

- Before beginning the Oracle Tuxedo installation you must install 64-bit Java 8 JDK.

The specific JDK required depends upon the operating system and vendor. Follow the instructions given earlier to install Java 8 JDK for your operating system.

See Installing JDK for Oracle WebLogic.

- TCP/IP connectivity (required for PeopleSoft PeopleTools 8.50 or higher) between the client machine and the application server
- For UNIX, you must have root access.
- Enough free disk space on the application server to install the product.

The disk space requirements vary by operating system. For free disk space requirements, see the Oracle Tuxedo documentation.

The Oracle Tuxedo installer uses the default system temporary space. If there is not enough space for installation, it will stop with an error. To specify a different temporary directory on Microsoft Windows, use the following command before starting the installer:

```
set IATEMPDIR=Complete_Path_Temp_Dir
```

Replace *Complete\_Path\_Temp\_Dir* with the full path to the temporary directory that you want to use for the installation.

If you are sure you have enough space, but the installer still gives an error about low disk space (this usually happens on Linux), run the following command before starting the installer:

```
unset BLOCKSIZE
```

## Debugging the Oracle Tuxedo Installer

If the Oracle Tuxedo installation fails with no error message, open a command prompt and enter the following command:

```
set LAX_DEBUG=1
```

After entering this command, start the installer again. If you are using GUI mode on Microsoft Windows, you must start the installer using the same command prompt.

## Task 3-1-1: Obtaining the Oracle Tuxedo Installation Files from Oracle Software Delivery Cloud

You can obtain the files needed to install Oracle Tuxedo 12cR2 or 12cR2\_VS2012 from the Oracle Software Delivery Cloud portal. At this point you should have already downloaded the necessary files. If you have not yet downloaded the files, this section includes additional information on finding and using the files for Oracle Tuxedo if necessary.

See "Preparing for Installation," Using Oracle Software Delivery Cloud to Obtain Installation Files.

See Oracle Software Delivery Cloud, <https://edelivery.oracle.com>.

1. After logging in to Oracle Software Delivery Cloud, read the export restrictions, and then click Accept.
2. Enter Oracle Tuxedo in the Product field, and select Oracle Tuxedo 12.2.2.0.0 from the drop-down list.
3. Click Select Platform, select the operating system you are running on, and then click Select.
4. Click Continue.
5. Read the license agreement and select the check box to acknowledge that you accept the agreement.
6. Click Continue.



7. Click the filenames to download.

Save the zip file to a temporary directory on your local system, referred to in this documentation as *TUX\_INSTALL*.

8. After you download the installation files from Oracle Software Delivery Cloud, if it is necessary, transfer the files to a UNIX computer using FTP. Unzip the file and change the permissions of the unzipped file to make it an executable, for example using the `chmod +x` command.
9. Extract the files into *TUX\_INSTALL*.

After you extract, you see a Disk1 folder with two subfolders, `install` and `stage`.

---

**Note.** For the PeopleTools Client, install Oracle Tuxedo 12cR2\_VS2015 for Microsoft Windows (64-bit) to run with PeopleSoft PeopleTools 8.56.

---

## Task 3-1-2: Obtaining the Oracle Tuxedo Patches from My Oracle Support

You can download the latest patch for Oracle Tuxedo 12cR2\_VS2015 for Microsoft Windows or Oracle Tuxedo 12cR2 for Linux or UNIX from My Oracle Support.

---

**Note.** To obtain older Oracle Tuxedo patches, raise a service request through My Oracle Support.

---

To obtain the latest Oracle Tuxedo patch:

1. Sign in to My Oracle Support with your account name and password:  
<https://support.oracle.com>
2. Select the Patches & Updates tab.
3. Under Patch Search, select Product or Family (Advanced Search).
4. Select *Oracle Tuxedo* from the product drop-down list.
5. Select *Oracle Tuxedo 12.2.2.0.0* from the release drop-down list.
6. Select your platform.

---

**Note.** For detailed supported platform information, see the certifications area on My Oracle Support.

---

The supported platforms are:

- AIX
  - HP-UX Itanium
  - Linux
  - Microsoft Windows
  - Oracle Solaris on SPARC
7. Click Search.

Download the necessary files from the list of results. For installation on Microsoft Windows operating systems, make sure your rolling patch (RP) description has "VS2015" or "Visual Studio 2015" in the description.

---

**Note.** To begin a new search, select Edit Search in the top right of the results page.

---

8. Download the patch file for your operating system platform to a convenient directory, referred to here as *TUX\_INSTALL*.

9. After you install a patch, use these steps to verify the installation:
  - a. In a command prompt, change directory to *TUXDIR*\bin (where *TUXDIR* is the Oracle Tuxedo installation location).
  - b. Execute the following command:

```
tmadmin -v
```

The command displays the patch level. For example:

```
INFO: Oracle Tuxedo, Version 12.2.2.0.0_VS2015, 64-bit, Patch Level=>
016
```

### Task 3-1-3: Removing Existing Oracle Tuxedo Installations from Microsoft Windows (Optional)

You may already have prior versions of Oracle Tuxedo installed on your system from an earlier version of PeopleSoft PeopleTools. If you are completely upgrading to PeopleSoft PeopleTools 8.56 from an earlier version of PeopleSoft PeopleTools, then you may uninstall the existing version and patches.

---

**Note.** It is not mandatory to uninstall the existing version of PeopleSoft PeopleTools, as Oracle Tuxedo 12cR2\_VS2015 can coexist with prior versions on the same machine.

If you wish to use two versions of PeopleSoft PeopleTools that depend on different versions of Oracle Tuxedo, you should read the section "Ensuring that Oracle Tuxedo Coexists with Earlier Versions" before continuing.

---

You may have to uninstall Oracle Tuxedo for these reasons:

- You are having problems starting Oracle Tuxedo and decide to reinstall.
- You no longer need Oracle Tuxedo on a machine.

To uninstall Oracle Tuxedo from Microsoft Windows:

1. Using PSADMIN, shut down any application server, Process Scheduler, and Search server domains that may be running on the machine.
2. Stop the processes for the Tuxedo Monitor and the Tuxedo Administrative Web Server (wlisten and tuxwsvr), if applicable.
  - a. Right-click on the task bar and select Task Manager.
  - b. Highlight wlisten, and click the End Task button.
  - c. Highlight tuxwsvr and click the End Task button.
  - d. Exit Task Manager.
3. Stop and set the TListen *VERSION* service to manual, if applicable.
 

Replace *VERSION* with the version number for the existing service. For example, this would be TListen 9.1 or TListen 10gR3.

  - a. Select Start, Settings, Control Panel. Double-click Administrative Tools, and double-click the Services icon.
  - b. Select TListen *VERSION* and click the Stop button.
  - c. Choose the Startup Type and set to Manual.
4. Stop and set the ORACLE ProcMGR *VERSION* (or BEA ProcMGR *VERSION* for earlier releases) service to manual.
  - a. Select Start, Settings, Control Panel. Double-click Administrative Tools, and double-click the Services

- icon.
- b. Select ORACLE ProcMGR *VERSION* and click the Stop button.
  - c. Choose the Startup Type and set to Manual.
5. Reboot your machine.
  6. Uninstall Oracle Tuxedo in one of the following ways:
    - Using the Oracle Tuxedo *VERSION* installation CD provided by Oracle for PeopleSoft installations, open a Command Window, navigate to the root of the CD, and enter `psstuxinstall rmall`. This will remove Oracle Tuxedo *VERSION* plus any delivered Oracle Tuxedo patches from your system.
    - Using the Add/Remove Programs dialog, in sequence remove: Oracle Tuxedo*VERSION* RP and then Oracle Tuxedo *VERSION*.
  7. Go to the Control Panel, double-click on the System icon, and then perform the following actions:
    - a. Make sure `TUXDIR\bin` is deleted from the PATH environment variable definition.  
*TUXDIR* refers to the Oracle Tuxedo installation directory.
    - b. Delete the environment variable `TUXDIR`.
    - c. Make sure you click on Apply and OK to save your changes.
  8. Using Explorer, delete the Tuxedo home directory, such as `C:\bea\tuxedo8.1`.  
If you are unable to delete any files, reboot your machine and retry.

### Task 3-1-4: Designating the Application Server Administrator on Microsoft Windows

Before beginning the installation, you need to designate an existing user—or create a new user such as TUXADM or some other account—to be the Application Server Administrator. The Application Server Administrator, not the Windows Administrator, will install Oracle Tuxedo.

The designated user must be a local Microsoft Windows administrator and must have full system privileges. The Oracle Tuxedo installation program creates a new service for Microsoft Windows—called ORACLE ProcMGR V12.2.2.0.0\_VS2015—for which you need administrator privileges. This service was developed to port Oracle Tuxedo from UNIX to Microsoft Windows. Administrator rights are required since system registry settings are updated. Once this new service is created, you must reboot to start it.

When you configure your application server domain in a read-only *PS\_HOME* environment, the user ID designated to be the Application Server Administrator must have read-only access to *PS\_HOME*, read and write access to *PS\_CFG\_HOME*, and read-only access to the Oracle Tuxedo installation directory, *TUXDIR*, (for example, `C:\oracle\tuxedo12.2.2.0.0_VS2015`). Otherwise, in a scenario where `<PS_CFG_HOME> = <PS_HOME>`, the Application Server Administrator must have read and write access to *PS\_HOME* and read-only access to *TUXDIR*.

See "Configuring the Application Server on Windows."

See "Preparing for Installation," Defining Installation Locations.

To designate the Application Server Administrator:

1. Add the user ID by selecting Start, Administrative Tools, Computer Management, Local Users and Groups.  
Keep in mind that you can also use an existing account if you do not care to create a new one. You can set this to the system account or an account that is a domain administrator (if there is a need to access files on the domain).
2. Expand Local Users and Groups.

3. If the user ID does not yet exist, highlight the Users folder, and select Action, New User.
4. On the New User dialog box, specify the information for the new account.  
Make sure to deselect the User must change password at next logon check box.
5. Expand the Groups folder.
6. Right-click the Administrators group, and select All Tasks, Add to Group, Add.
7. Click Locations to select the local machine or the network domain in which you created the new user.
8. Enter the new user name you created in the object names box.
9. Click OK, and click Apply and OK again to accept the changes.

### **Task 3-1-5: Installing Oracle Tuxedo on Microsoft Windows in GUI Mode**

The following procedure assumes that you saved and extracted the installation files from Oracle Software Delivery Cloud in the directory *TUX\_INSTALL*. Installation in GUI mode is normally used for Microsoft Windows operating systems.

---


**Note.** Oracle Tuxedo 12cR2\_VS2015 can coexist on a machine with other versions of Oracle Tuxedo.

---

To install Oracle Tuxedo on Microsoft Windows:


1. Double-click `TUX_INSTALL\Disk1\install\setup.bat` to begin the installation process.

Click OK on the Welcome window, shown in this example:

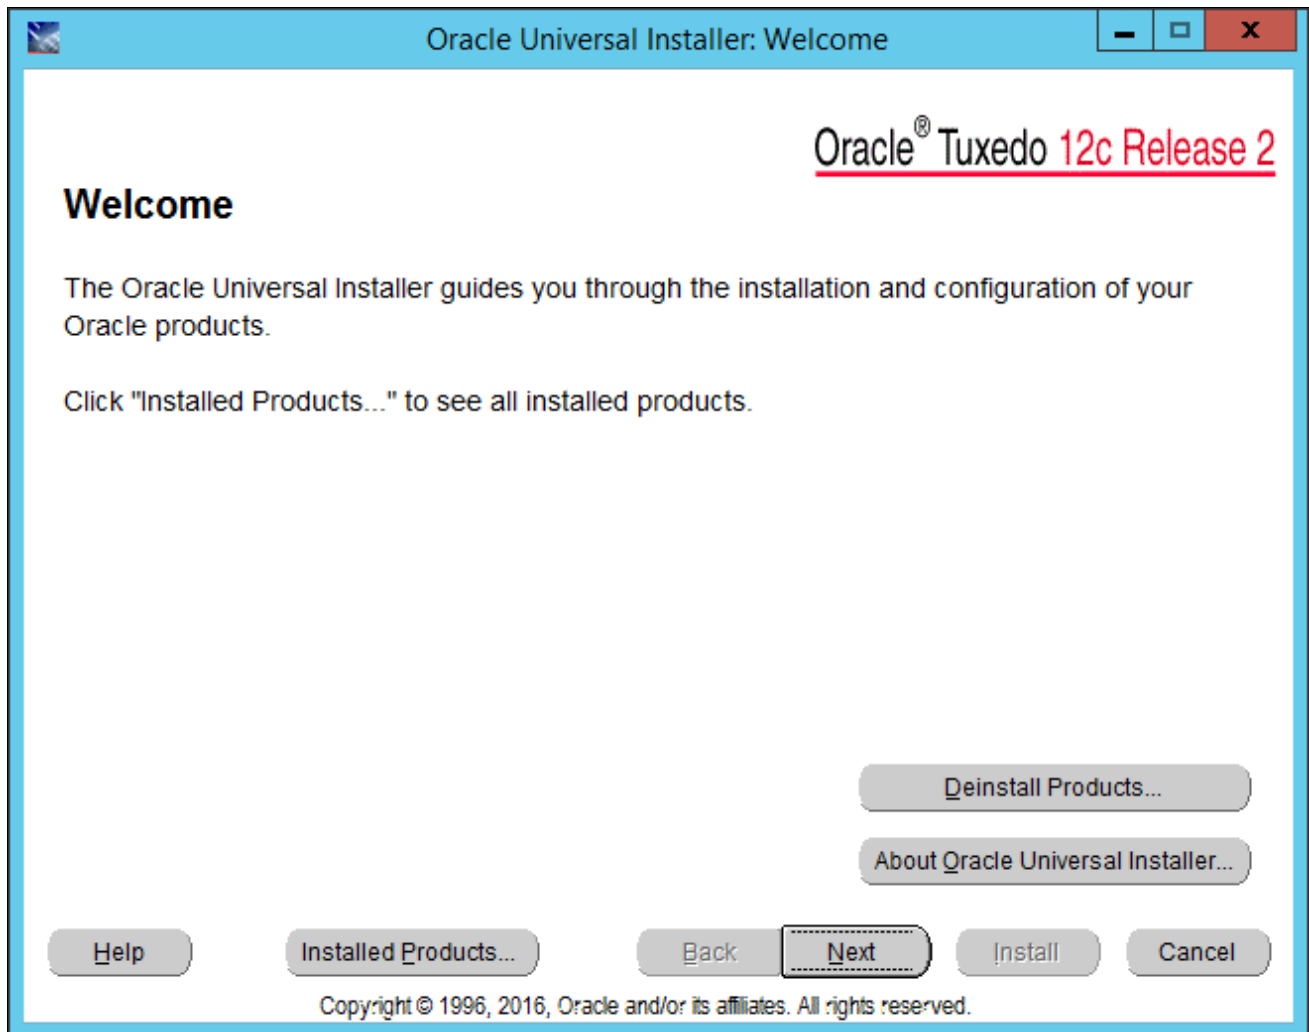

Oracle Universal Installer: Welcome window for Oracle Tuxedo 12c Release 2

2. Accept the default option, Full Install, on the Select Installation Type window, as shown in this example, and click Next.

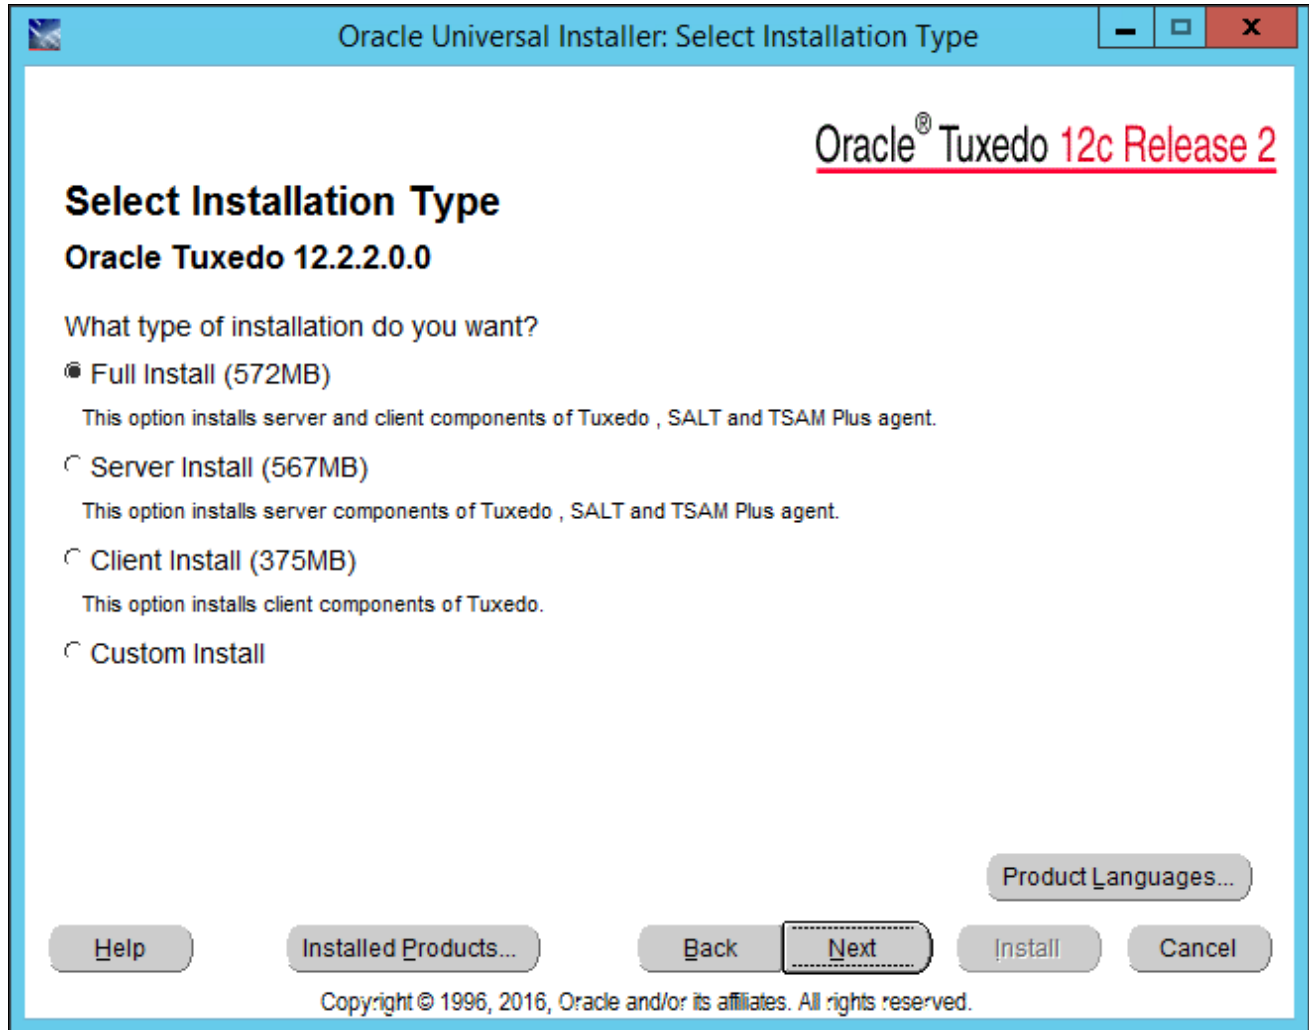


Oracle Universal Installer: Select Installation Type window

3. Specify a name and the home directory path for the installation.

You can enter a new name, or choose an existing name from the drop-down list. The name that you supply will be used to identify this Oracle Tuxedo installation in the Oracle Universal Installer, when reviewing the Installed Products list. In this example, the name is `tuxedo1222vs2015`.

Specify the full path for the home directory. You can choose an existing path from the drop-down list. The Path refers to the location where the Oracle Tuxedo will be installed. The default is `ORACLE_HOME\tuxedo12.2.2.0.0_VS2015`. In this example, the path is `C:\oracle`, which is the recommended location, so the software will be installed to `C:\oracle\tuxedo12.2.2.0.0_VS2015`. The installation directory is referred to in this documentation as `TUXDIR`.


**Note.** In previous Oracle Tuxedo and PeopleSoft PeopleTools releases, the installation directory was referred to as `BEA_HOME`, and the default was `C:\bea`. You may see installation directories from previous releases displayed here, and if so, you can select one.

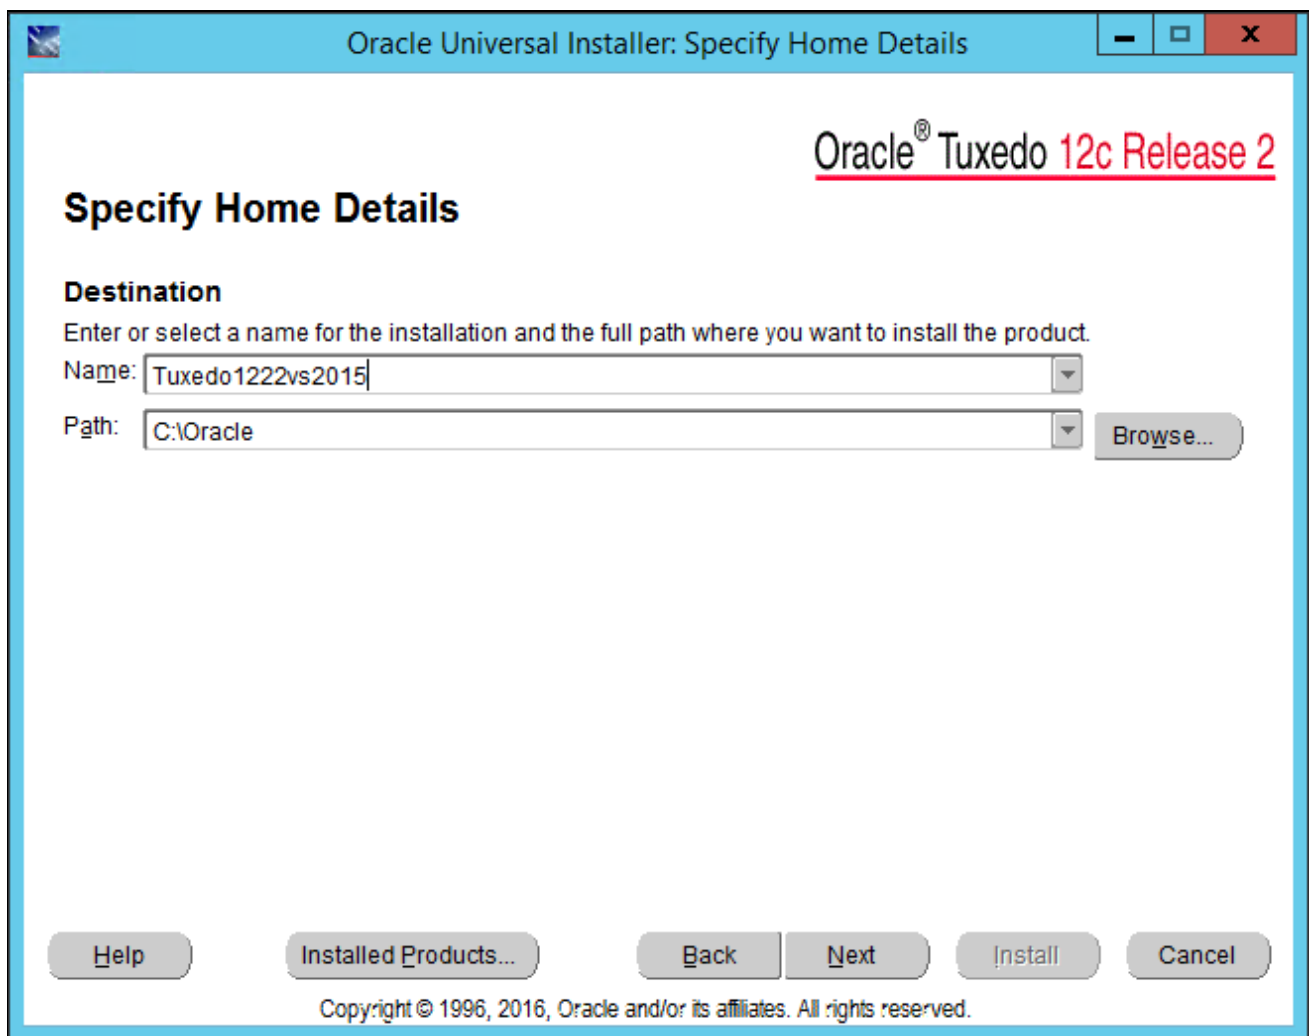

Oracle Universal Installer: Specify Home Details window

4. If you select an existing directory that is not empty, you may see a warning message.

The message recommends that you install to an empty directory unless the directory contains Operating System generated files or subdirectories like lost+found. Click Yes to close the message and continue.

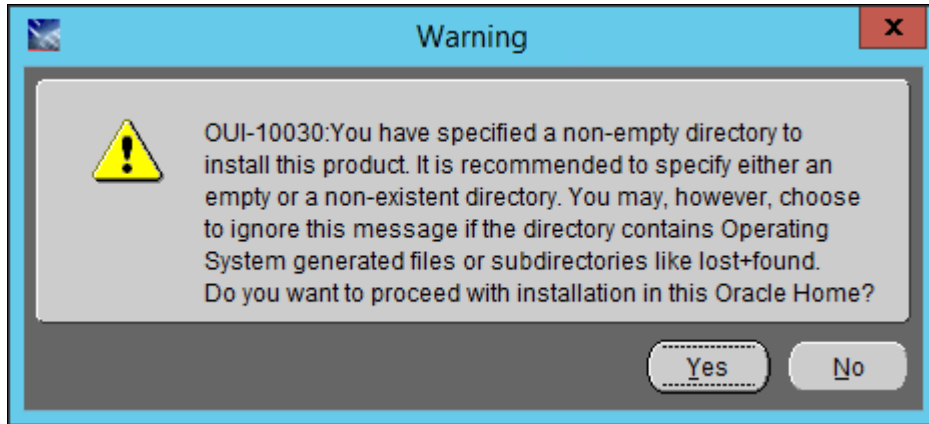


Warning message for a non-empty directory

5. If you have other versions of Oracle Tuxedo on your system, you may get a warning that earlier versions were detected, and with a recommendation that you exit and remove the earlier versions.

You can either quit and remove the earlier version, or install to a different directory if you want to maintain more than one version of the software. The message directs you to the earlier Installation Guide for instructions for using more than one version of the software. Click Next to continue.




- 6. Select No on the TSAM Plus agent enable choice window, as shown in this example, and then click Next. This indicates that you do not want to enable Oracle Tuxedo System and Applications Monitor Plus (Oracle TSAM Plus) agent.

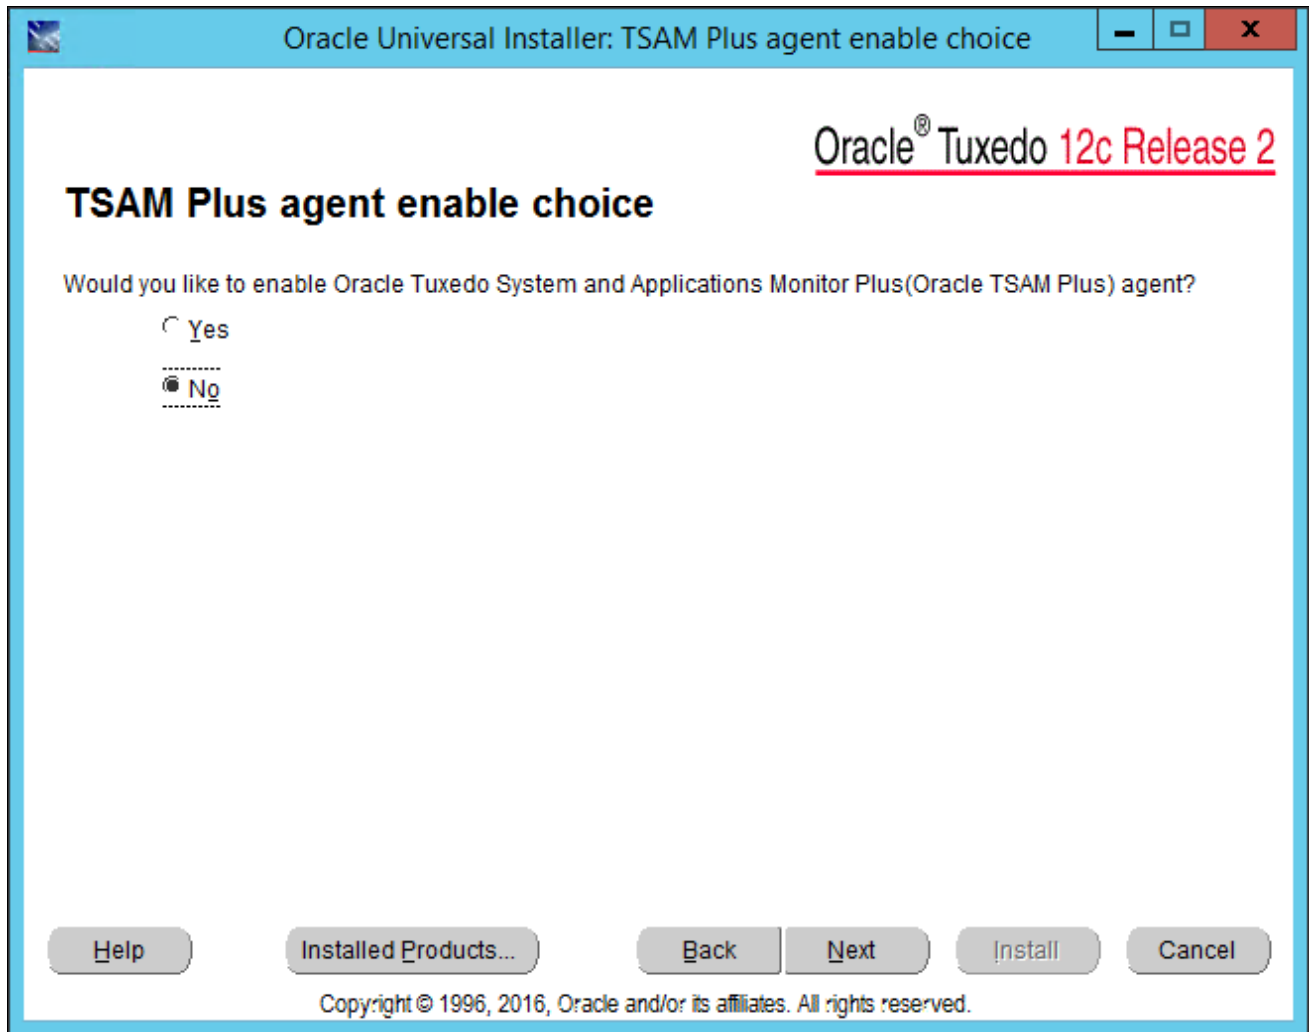


Oracle Universal Installer: TSAM Plus agent enable choice window

7. Select No to indicate that you do not want to install Oracle Tuxedo Samples, as shown in this example, and then click Next.

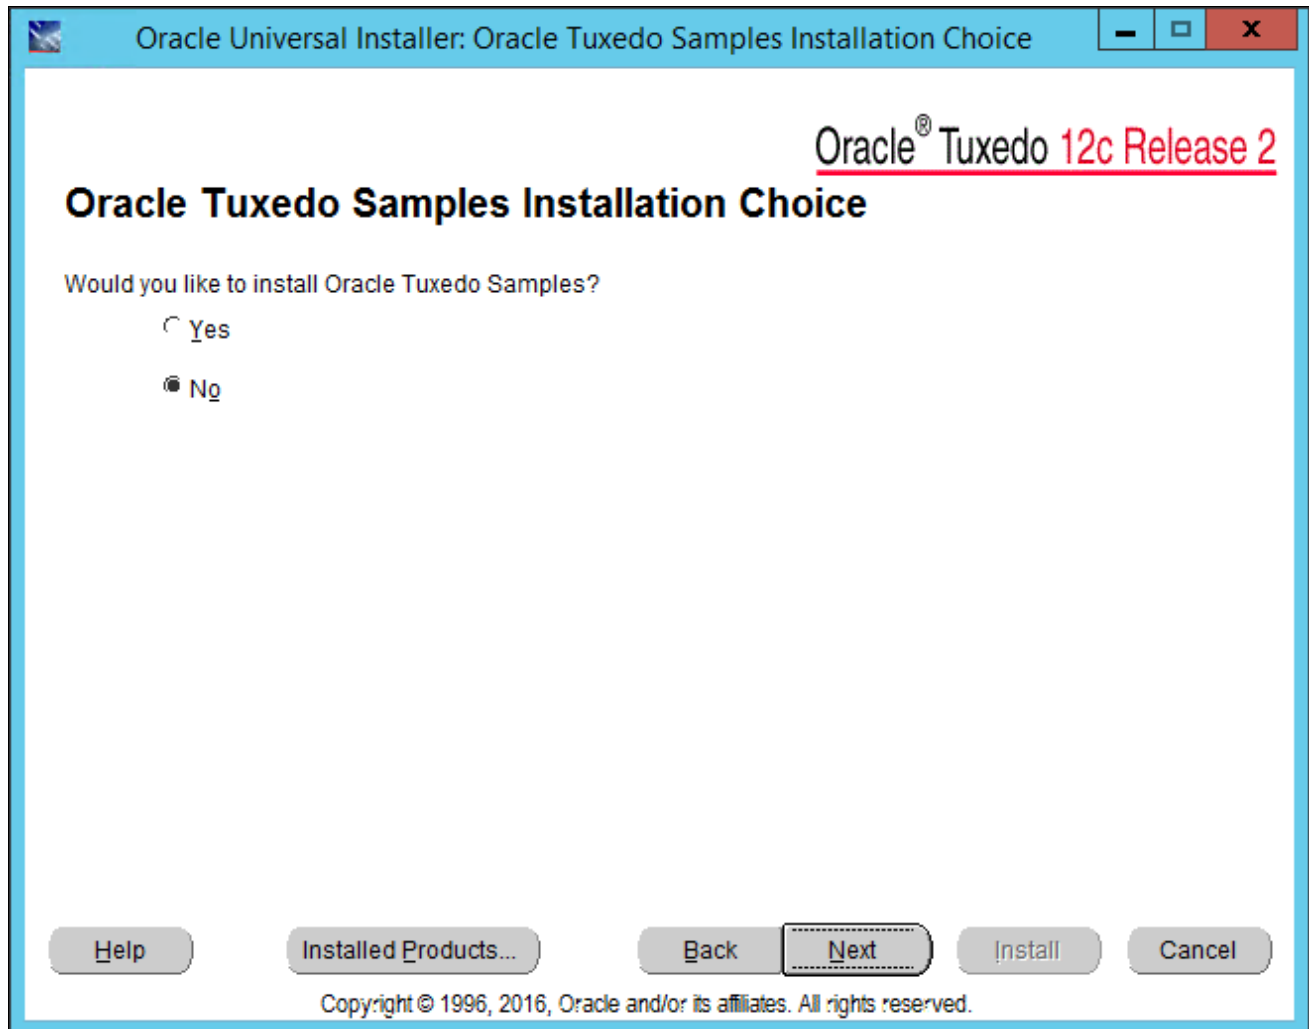


Oracle Universal Installer: Oracle Tuxedo Samples Installation Choice window

- 8. Select Yes to indicate that you want to configure Oracle Tuxedo tlisten, as shown in this example, and then click Next.

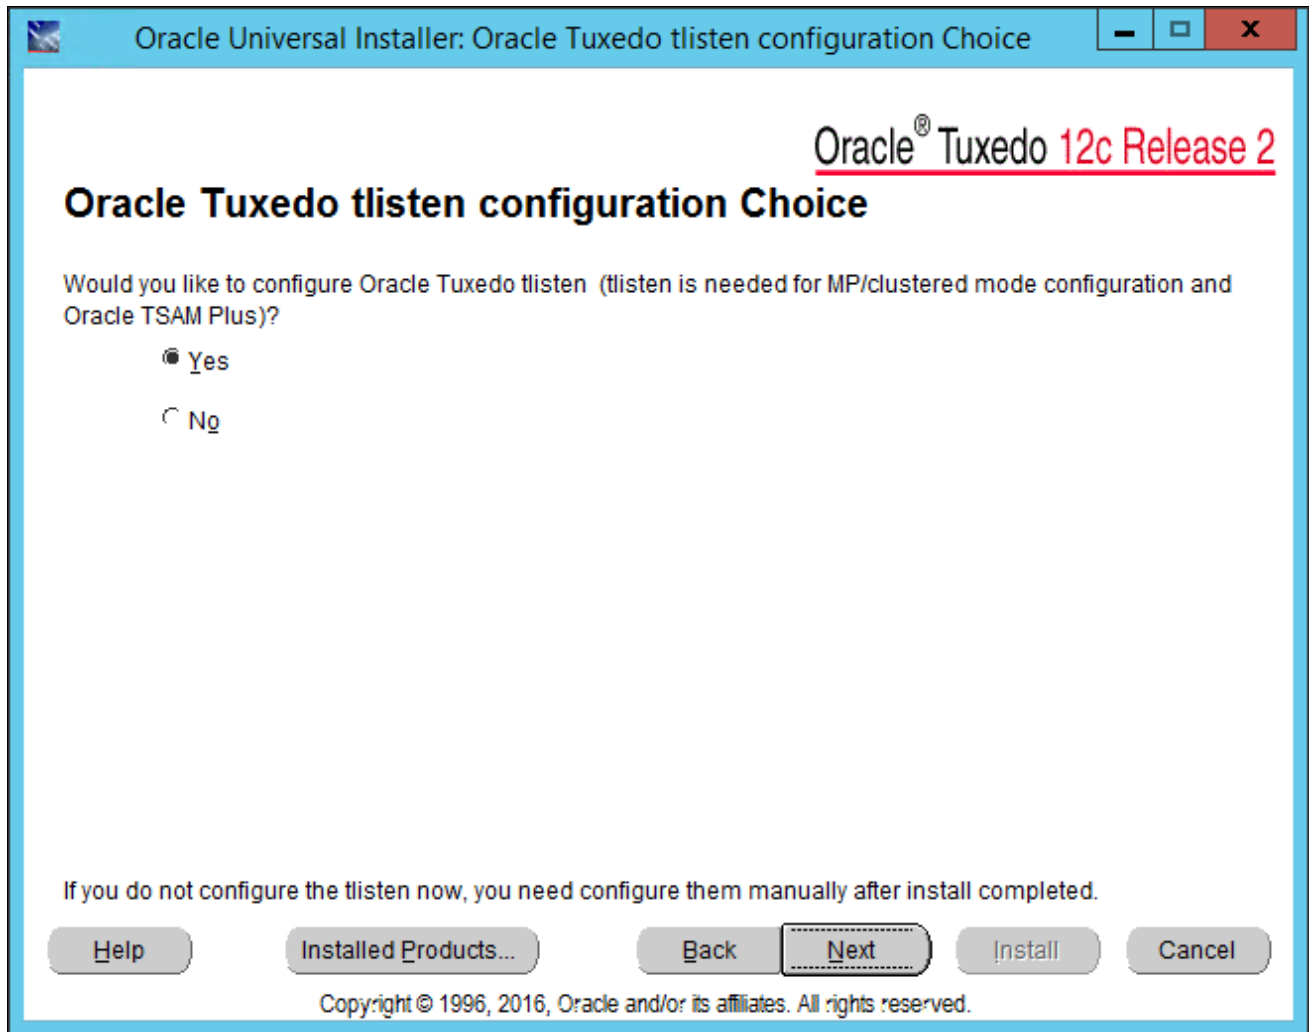

Oracle Universal Installer: Oracle Tuxedo tlisten configuration Choice window

9. Enter a password for Oracle Tuxedo tlisten.

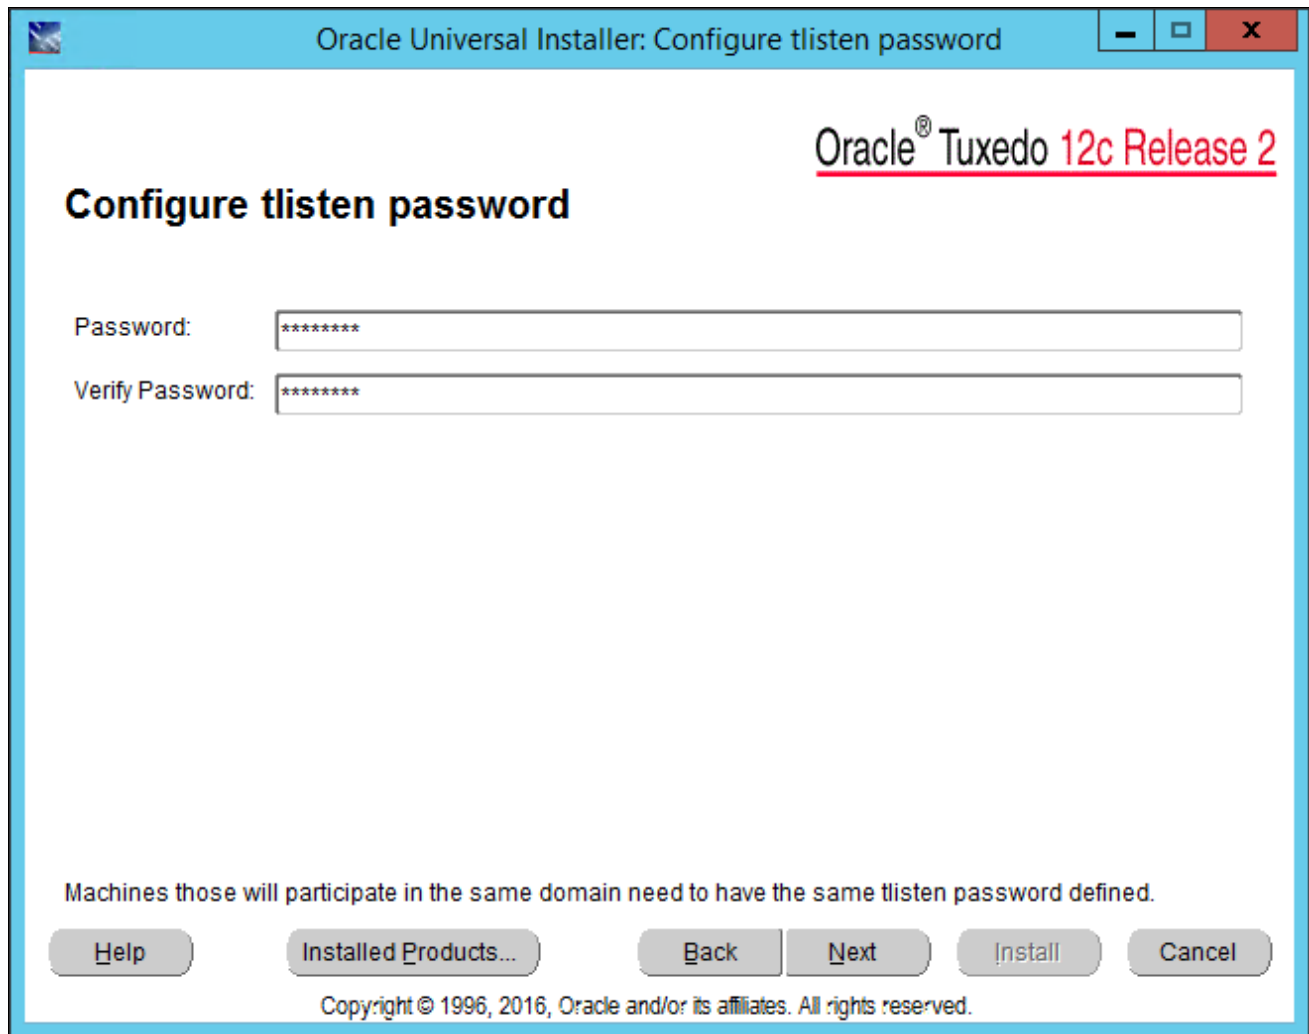

Oracle Universal Installer: Configure tlisten password

Oracle® Tuxedo 12c Release 2

### Configure tlisten password

Password:

Verify Password:


Machines those will participate in the same domain need to have the same tlisten password defined.

Help Installed Products... Back Next Install Cancel

Copyright © 1996, 2016, Oracle and/or its affiliates. All rights reserved.


Oracle Universal Installer: Configure tlisten password window

10. Accept the default tlisten port, 3050, or enter another port number.

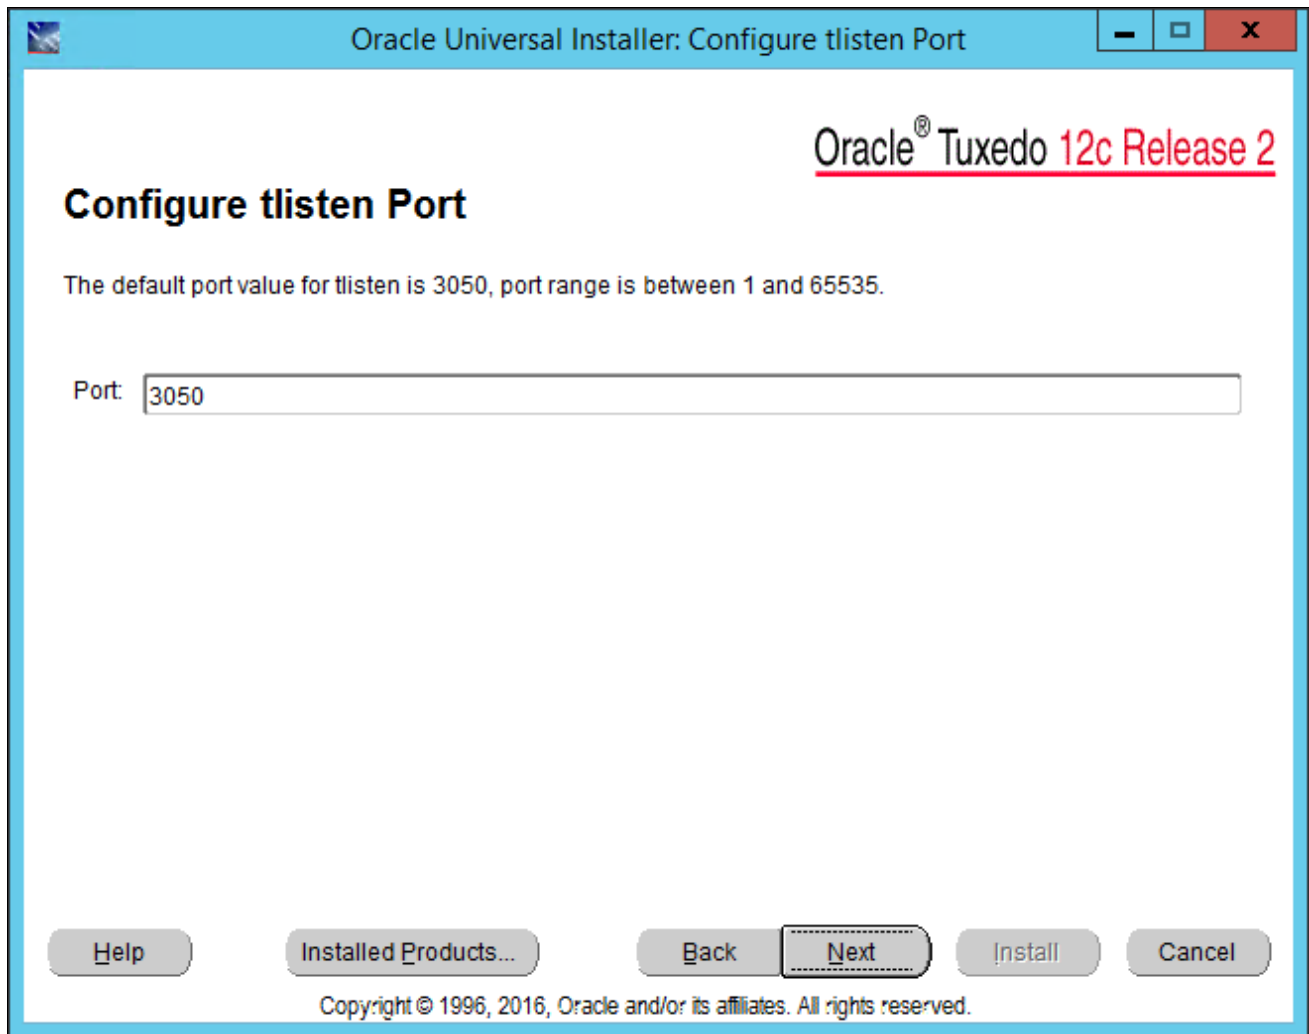


Oracle Universal Installer: Configure tlisten Port window

11. Select LLE as the Tlistener encryption method.

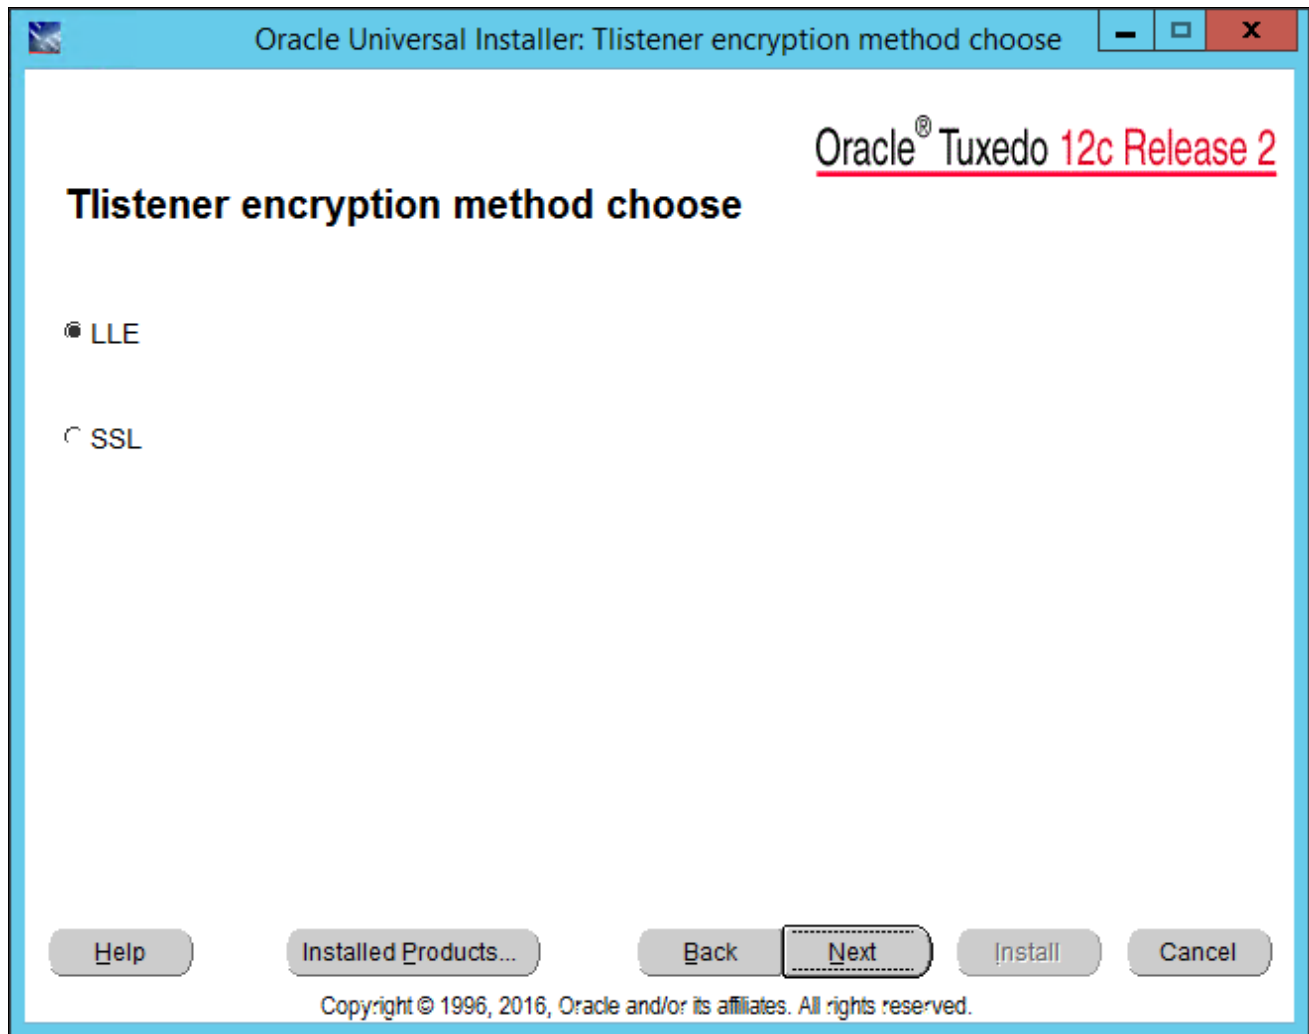


Oracle Universal Installer: Tlistener encryption method choose window

12. Accept the default value of 0 (zero) for the minimum encryption bits.

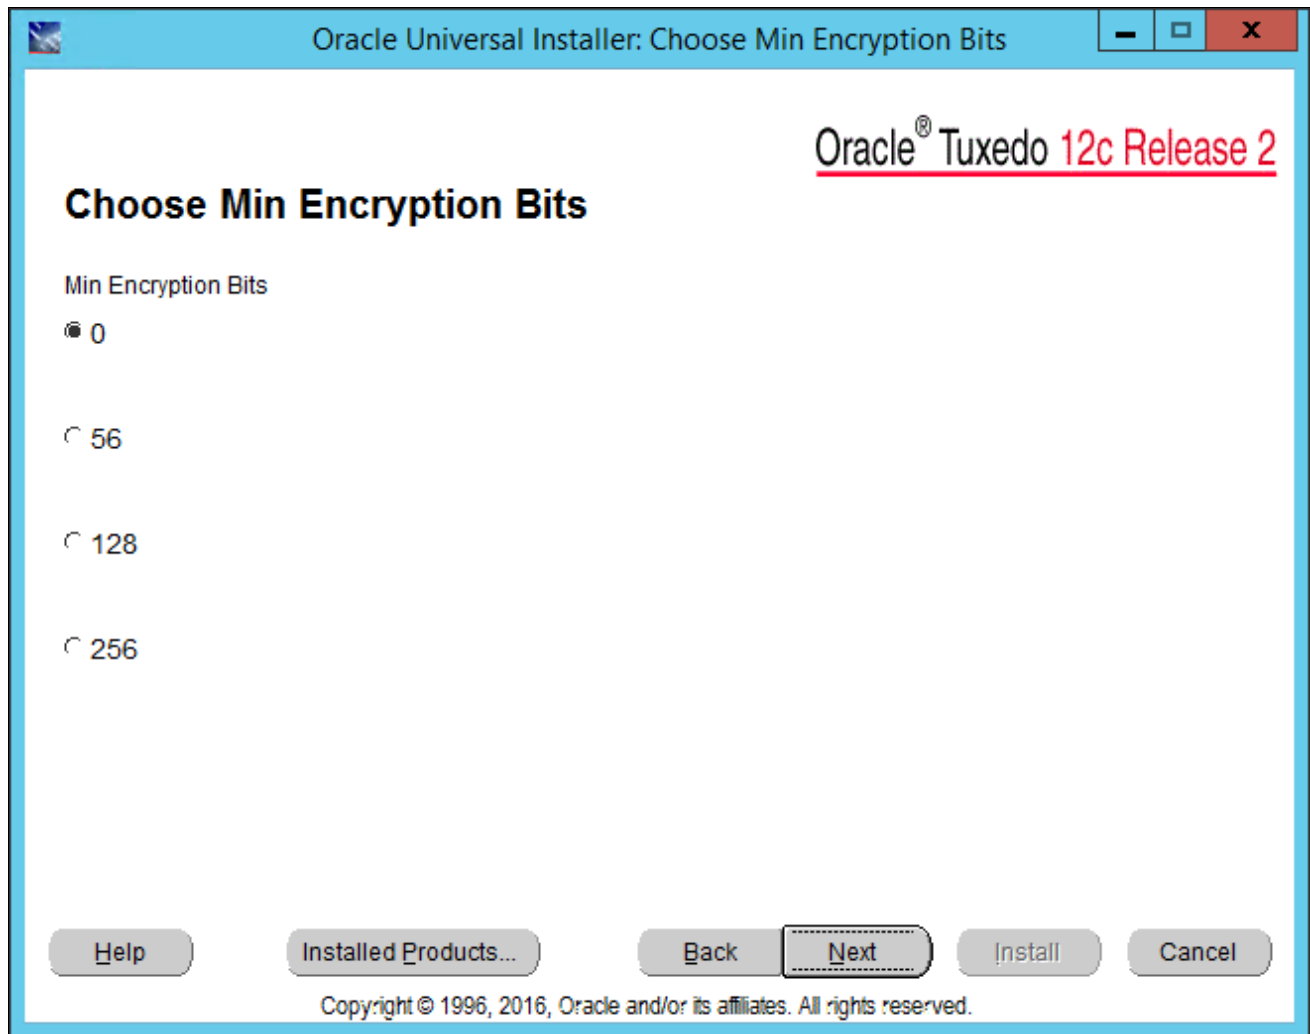

Oracle Universal Installer: Choose Min Encryption Bits window


13. Accept the default value of 256 as the default value of maximum encryption bits.

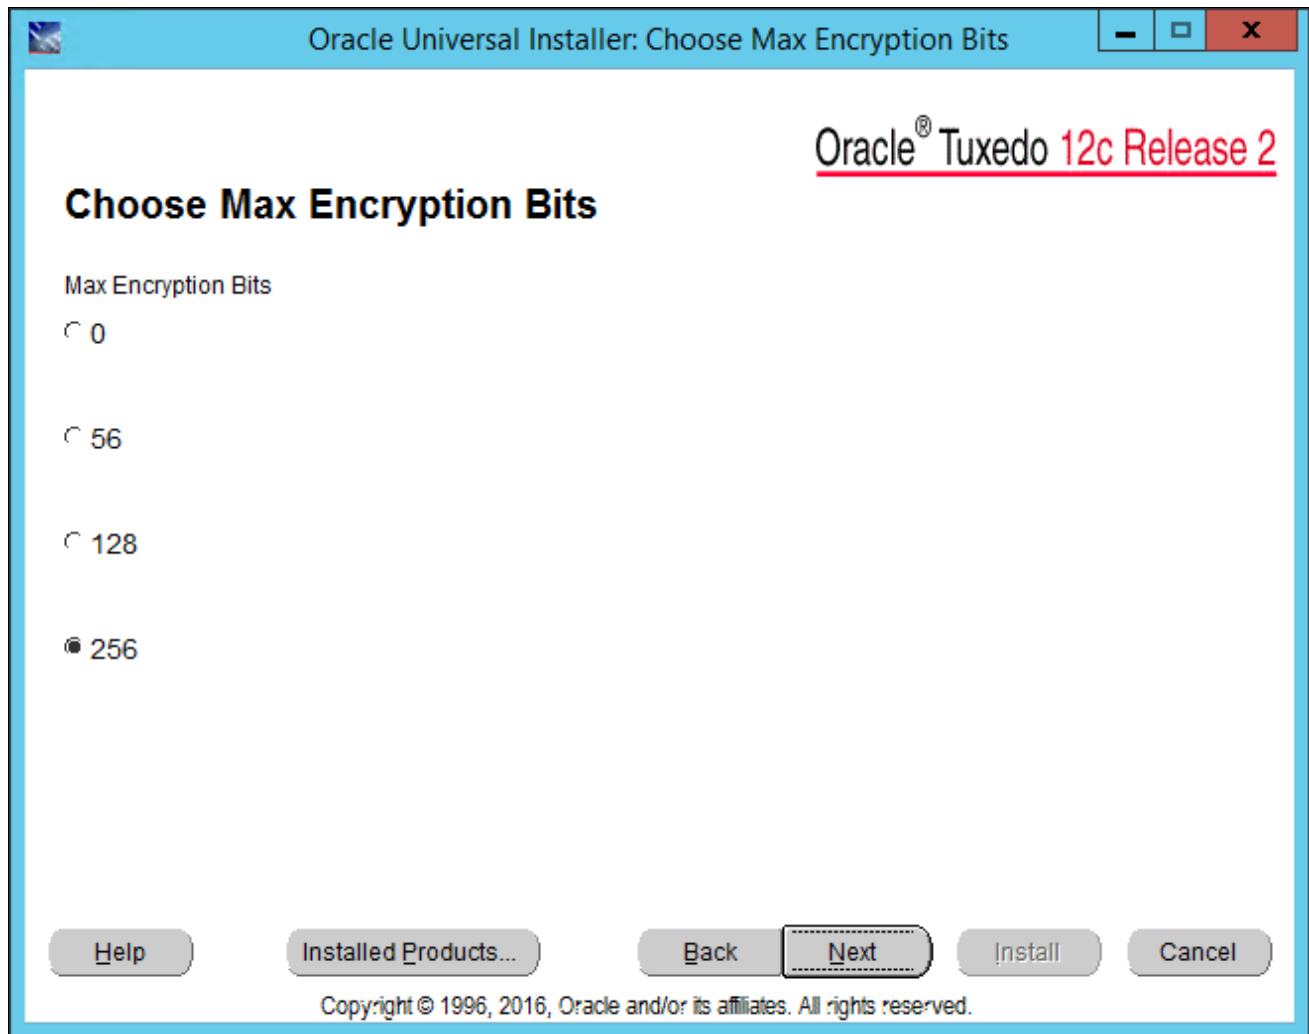

Oracle Universal Installer: Choose Max Encryption Bits window




14. Select Yes on the SSL Support Choice window, as shown in this example, and then click Next.

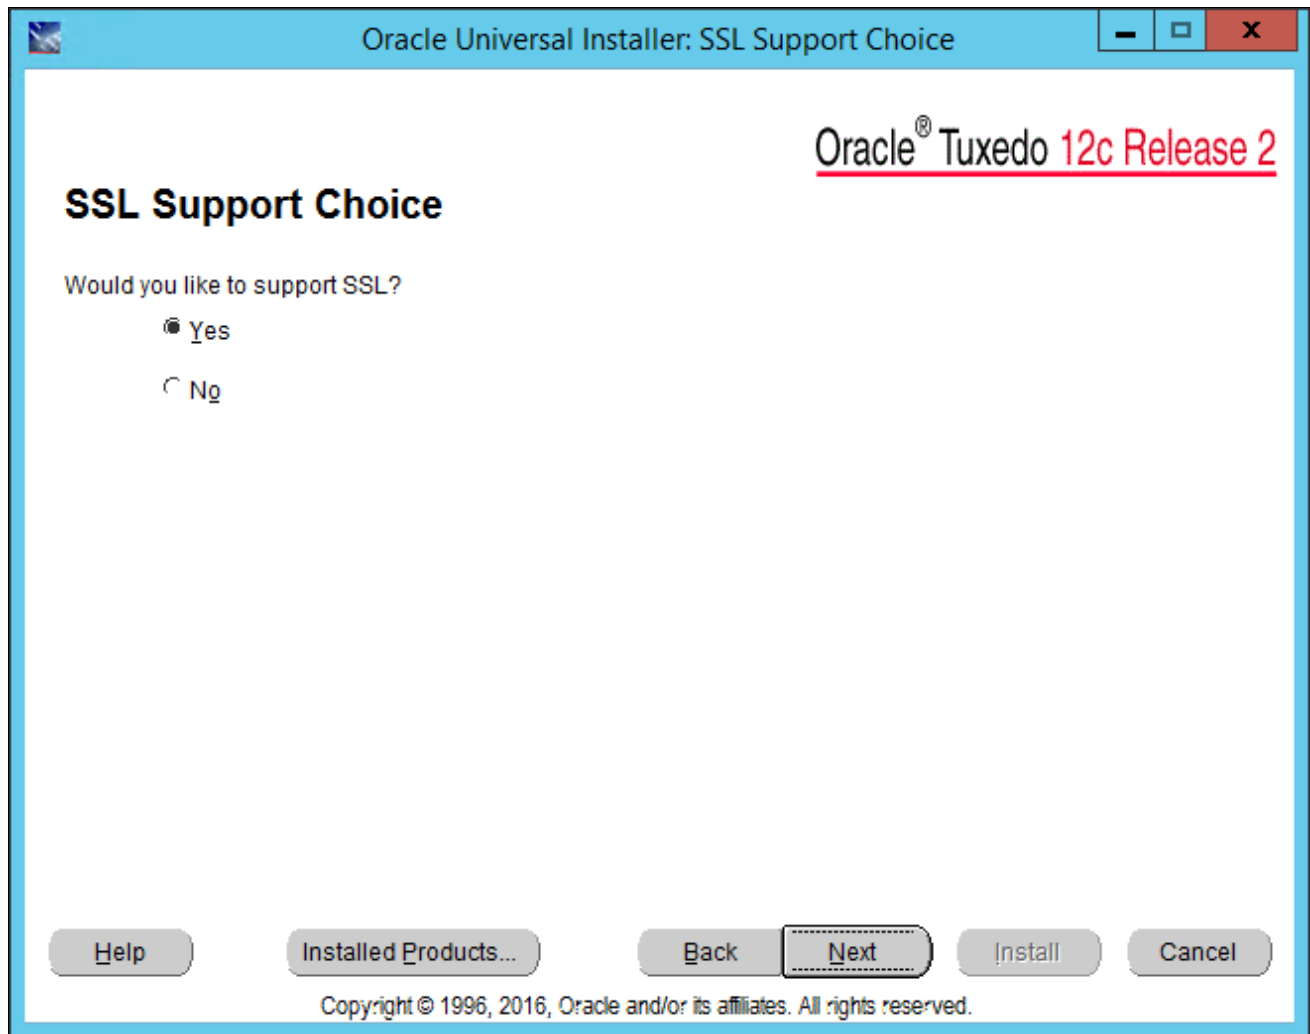

Oracle Universal Installer: SSL Support Choice window


15. Select No for the option Would you like to configure LDAP for SSL Support? and then click Next.

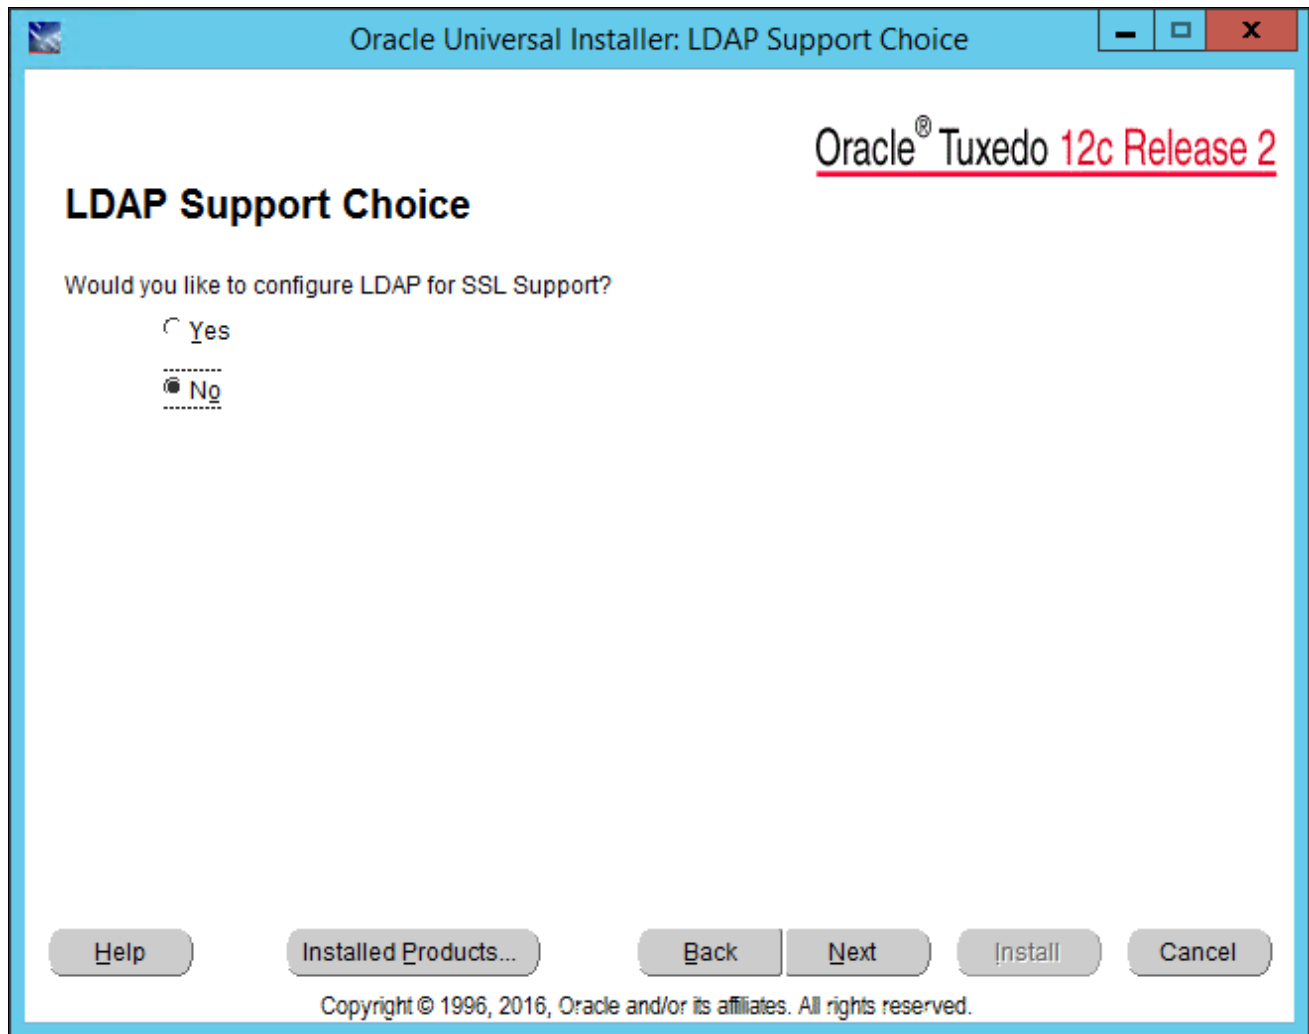

Oracle Universal Installer: LDAP Support Choice window

16. Review the summary information, and click Install to continue.


The summary information, shown in this example, includes the product name, install folder, installation type, and disk space information. If you want to change any of your choices, click Back.

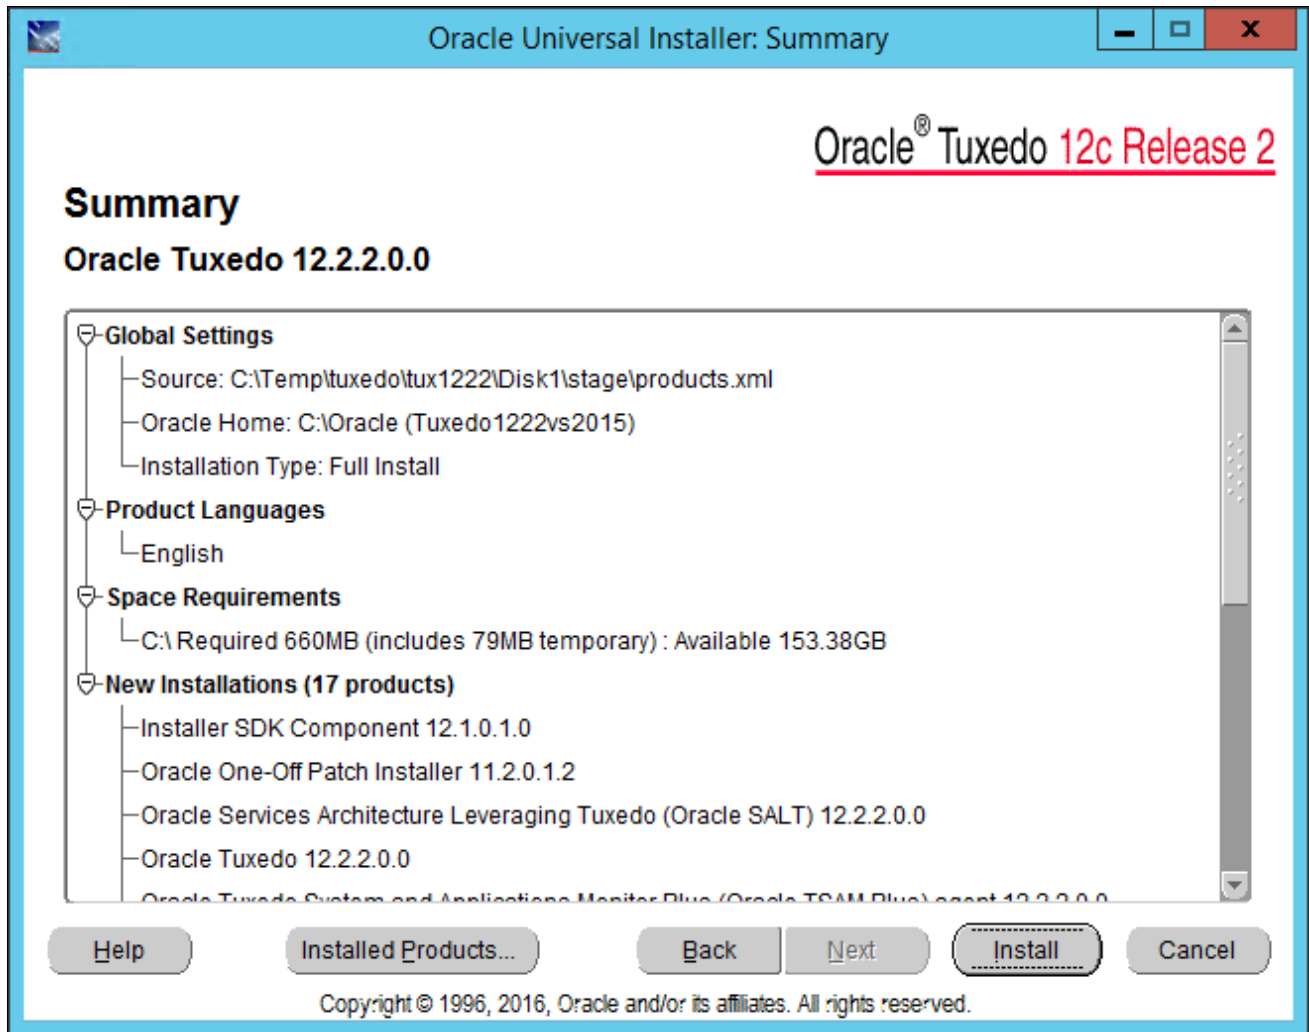

Oracle Universal Installer: Summary window

A progress indicator appears during the installation.

17. Click Exit when you see the window indicating the installation completed successfully, as shown in this example.

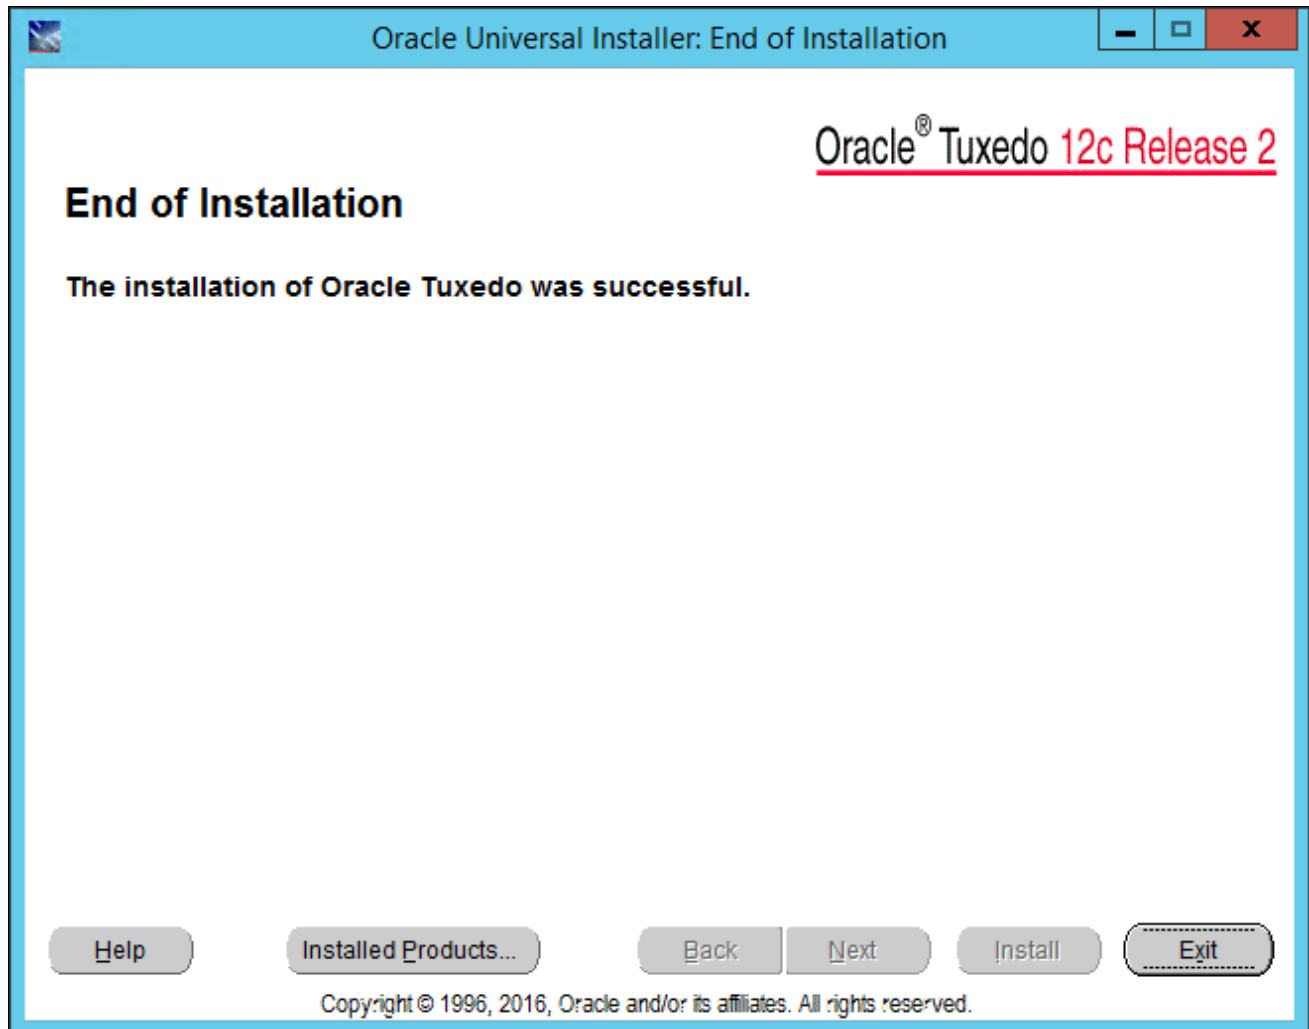

Oracle Universal Installer: End of Installation window

### Task 3-1-6: Installing the Oracle Tuxedo Patch on Microsoft Windows

These instructions assume that you have installed the base Oracle Tuxedo 12cR2\_VS2015, and have downloaded the platform-specific version of the rolling patch to a directory referred to here as *TUX\_INSTALL*. Carry out these steps as a user with administrative privileges.

To install the patch:

1. Stop all PeopleSoft PeopleTools domains that are running and using your Oracle Tuxedo installation.
2. Verify that the environment variable TUXDIR is set to the Oracle Tuxedo installation location, such as C:\oracle\tuxedo12.2.2.0.0\_VS2015.

---

**Note.** The TUXDIR directory should include subdirectories bin and udataobj.

---

3. Verify that the environment variable ORACLE\_HOME is set to the *ORACLE\_HOME* location you specified when you installed Oracle Tuxedo, such as C:\oracle.

---

**Note.** This is the parent directory for the Oracle Tuxedo installation. It should include subdirectories OPatch and oui.

---

4. Verify that the environment variable JAVA\_HOME is set to the 64-bit JDK 1.8 directory, as mentioned in the prerequisites section.

5. Run the following command to verify the opatch version:

```
%ORACLE_HOME%\OPatch\opatch.bat version
```

The version should be 12.1.0.1.1 or later. If the version is lower, you must first update opatch by installing patch 19166960.

6. Launch the Services window; for example, select Start, Administrative Tools, Services.

7. Select each of the following services, right-click, and select Stop:

- ORACLE ProcMGR V12.2.2.0.0\_VS2015
- TListen 12.2.2.0.0\_VS2015 (Port: 3050)

---

**Note.** The port number is variable.

---

8. Uninstall any existing patches.

9. Go to the directory where you downloaded the patch zip file from My Oracle Support, *TUX\_INSTALL*, and unzip the file.

This creates a directory that includes a zip file named 25391869.zip with the patch.

10. Set the environment variable for the platform ID; for example:

```
set OPATCH_PLATFORM_ID=233
```

You can find the value for OPATCH\_PLATFORM\_ID in the file *ORACLE\_HOME/inventory/ContentsXML/oraclehomeproperties.xml*.

11. Open a command prompt and go to the *TUX\_INSTALL/25391869* directory.

12. Run the following command:

```
%ORACLE_HOME%\OPatch\opatch.bat apply 25391869.zip
```

---

**Note.** The patch installer backs up all files being patched. The backup copy is located in the directory *ORACLE\_HOME\patch\_storage\*. Do not delete these backup files. They will be used if you need to remove the patch installation.

---

You see a message similar to the following:

```
Oracle Home       : C:\oracle
Central Inventory : C:\Program Files\Oracle\Inventory
  from            : n/a
OPatch version    : 12.2.0.1.0
OUI version       : 12.2.0.1.0
Log file location : C:\oracle\cfgtoollogs\opatch\opatch<datetime>.log
```

13. If OPatch cannot locate the Oracle inventory, you may see a messages such as the following:

```
Applying interim patch 25391869 to OH 'C:\Oracle'
Verifying environment and performing prerequisite checks.
OPatch system modification phase did not start
```

In this case, specify the full path to the Oracle inventory file oraInst.loc, with the `invPtrLoc` option:

```
%ORACLE_HOME%\OPatch\opatch.bat apply 25391869.zip -invPtrLoc <full_⇒
path_to_inventory_file>
```

## Task 3-1-7: Installing Oracle Tuxedo on Microsoft Windows in Silent Mode

This section discusses:

- Understanding Silent Installation on Microsoft Windows
- Running the Silent Mode Installation on Microsoft Windows

### Understanding Silent Installation on Microsoft Windows

You can carry out a silent installation of Oracle Tuxedo 12cR2\_VS20125 by providing all the required settings in a response file. With silent installation there is little or no user interaction.

See Oracle Tuxedo documentation.

Use a text editor to create the response file and specify the values according to your installation requirements.

Here is a sample response file:

```
#
# ..... Silent Installation Properties file .....
#

RESPONSEFILE_VERSION=2.2.1.0.0

ORACLE_HOME="C:\oracle"

ORACLE_HOME_NAME="tuxedo1222_VS2015"

INSTALL_TYPE="Full Install"

ENABLE_TSAM_AGENT=false

LDAP_SUPPORT_SSL=false

INSTALL_SAMPLES=false

ENCRYPT_CHOICE=0

CONFIG_TLISTEN=false
```

Most of the entries are similar to those seen in the GUI installation. Note the following definitions:

- **ORACLE\_HOME:** The high level installation directory, for example C:\oracle.  
The installer creates the Oracle Tuxedo installation directory, *TUXDIR*, as `ORACLE_HOME\tuxedo12.2.2.0.0_VS2015`.
- **ORACLE\_HOME\_NAME:** The name of the current Oracle installation, for example `tuxedo1222_VS2015`.  
This identifies the Oracle Tuxedo installation in the Oracle Universal Installer, when reviewing the Installed Products list.

## Running the Silent Mode Installation on Microsoft Windows

The following procedure assumes that you saved and extracted the installation file from Oracle Software Delivery Cloud in the directory *TUX\_INSTALL*.

See Obtaining the Oracle Tuxedo Installation Files from Oracle Software Delivery Cloud.

To run the installer:

1. Create a response file as described in the previous section and copy it to *TUX\_INSTALL*.
2. Open a command prompt and change directory to *TUX\_INSTALL*\Disk1\install.
3. Run the installer.

- If you specify an empty directory for *ORACLE\_HOME*, use this command:

```
setup.exe -silent -responseFile response_file
```

Specify the full path to the response file. For example, if the response file name is *response.rsp*, and *TUX\_INSTALL* is *D:\Temp*, use this command:

```
setup.exe -silent -responseFile D:\Temp\response.rsp
```

- If you specify an existing directory that is not empty for *ORACLE\_HOME*, you must include the *-force* option.

When you use the *-force* option with a non-empty *ORACLE\_HOME*, you may see a warning message recommending that you install to an empty directory or one that includes Operating System generated files. You may close the message to continue the installation.

```
setup.exe -silent -responseFile D:\Temp\response.rsp -force
```

---

**Note.** If you do not include the *-force* option with an *ORACLE\_HOME* directory that is not empty, the installer will abort.

---

4. After you enter the commands in the previous steps, the installer is launched in silent mode, and a progress indicator tracks the installation.

When the installation is complete, you should see a completion message such as "The installation of Oracle Tuxedo was successful."

## Task 3-1-8: Uninstalling the Oracle Tuxedo Patch on Microsoft Windows

To remove an Oracle Tuxedo installation, you must first remove the rolling patch, as follows:

1. Stop all PeopleSoft PeopleTools domains that are running and using your Oracle Tuxedo installation.
2. Verify that the environment variable *TUXDIR* is set to the Oracle Tuxedo installation location, such as *C:\oracle\tuxedo12.2.2.0.0\_VS2015*.
3. Verify that the environment variable *ORACLE\_HOME* is set to the *ORACLE\_HOME* location you specified when you installed Oracle Tuxedo, such as *C:\oracle*.
4. Open a command prompt and run the following command:

```
%ORACLE_HOME%\OPatch\opatch.bat rollback -id 25391869
```

## Task 3-1-9: Uninstalling Oracle Tuxedo in GUI Mode

To remove the Oracle Tuxedo 12cR2\_VS2015 or 12cR2 installation, use Oracle Universal Installer (OUI).

1. Start Oracle Universal Installer (OUI).

The way that you access OUI may vary depending upon your environment. Use one of the following methods, for example:

- On Microsoft Windows 2012 R2, access the Apps screen, and select Oracle 12c, Oracle Installation Products, Universal Installer.
- Double-click `TUX_INSTALL\Disk1\install\setup.exe`.


2. Click Deinstall Products, as shown in this example:



Oracle Universal Installer: Welcome window



- On the Contents page, select the name for the Oracle Tuxedo installation, which is tuxedo1222vs2015 in this example, and then click Remove.

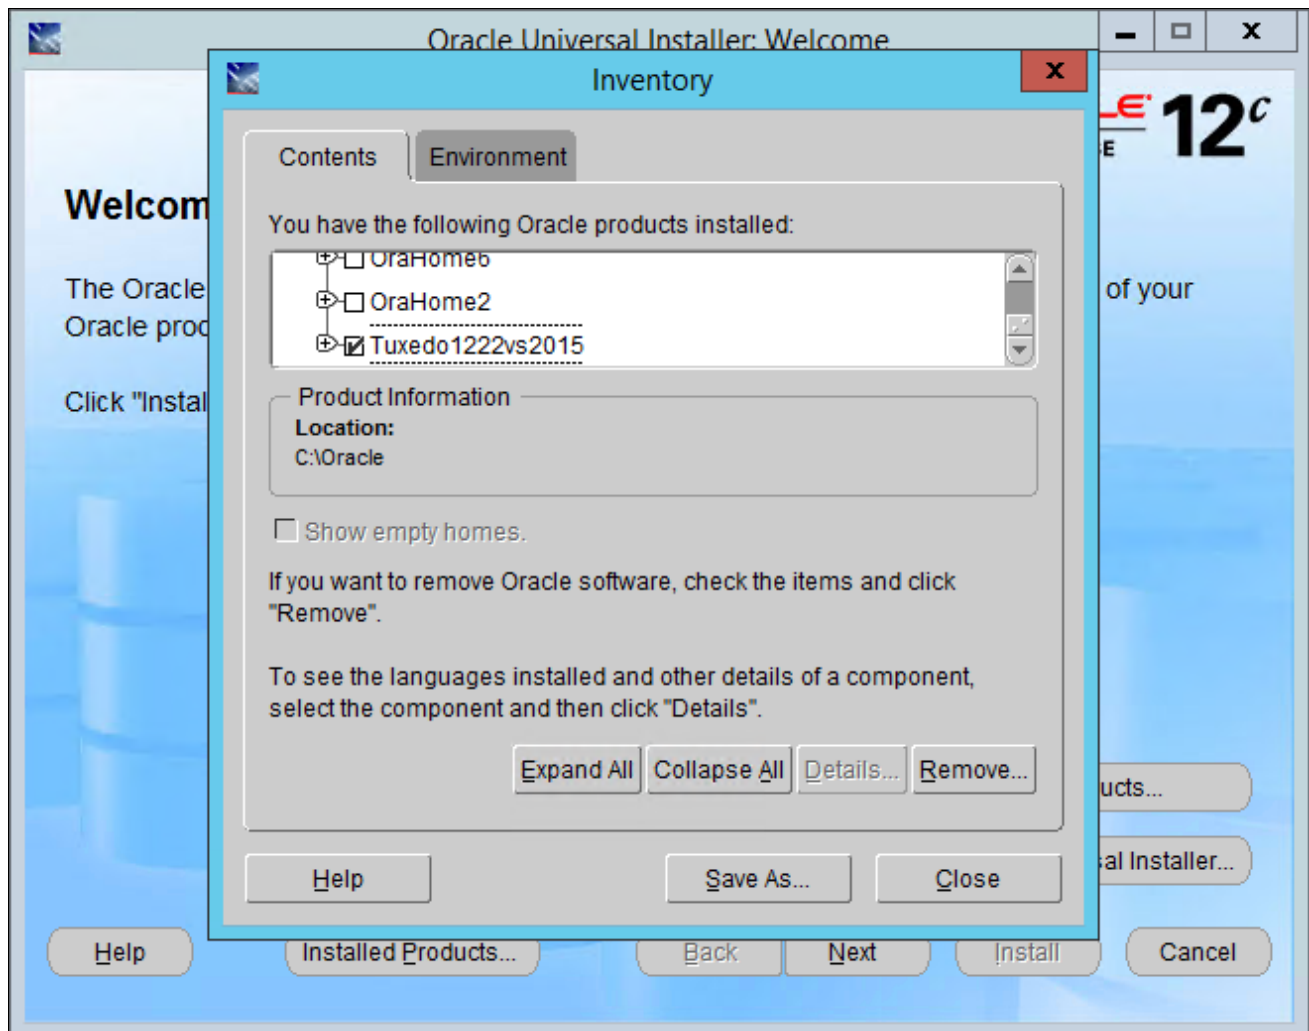

Inventory window: Contents page

- Open the Microsoft Windows registry, for example by selecting Start, Run, regedit.

Verify that the following key has been removed from the registry:

HKEY\_LOCAL\_MACHINE\SOFTWARE\ORACLE\TUXEDO\12.2.2.0.0\_VS2015

### Task 3-1-10: Checking the Windows Service Account

Use the information in this section to ensure that the Microsoft Windows services are properly configured. Oracle recommends installing the application server binaries locally on your C drive, for best performance. The procedure to set up the ORACLE ProcMGR V12.2.2.0.0\_VS2015 service in the next section includes options for the account type. Use the following guidelines to choose between the Local System account option and the This Account option. (For the option This Account, you must specify a user ID and password.)

**Note.** For the sake of brevity and convenience, this documentation sometimes shortens "ORACLE ProcMGR V12.2.2.0.0\_VS2015" to "Oracle ProcMGR."

- If you plan to install the PeopleSoft application server binaries (as in, psappsrv.exe and so on) on a remote file

server, you must select the This Account option.

- If the PeopleSoft application server binaries are *local*, that is, they exist on your local hard drive, you can use either the Local System account or This Account option.
- If you intend to use this Microsoft Windows service to start Process Scheduler, you must *always* select the This Account option. Enter the name of your Domain/Windows user name—not the machine name—and your password.
- If you are running on Microsoft Windows and are configuring a search index that resides on a mapped network drive, you must ensure that the user ID of the Oracle ProcMGR service has access to network drives accessed by the search engine. The search engine stores the search indexes at *PS\_HOME/data/search*. However, this path can be changed in the application or the Process Scheduler's configuration. If this path is changed in these configurations and it points to a network drive, you must ensure that the user ID that starts the Oracle ProcMGR service has access to these network drives. The application server and the Process Scheduler are started by the Oracle ProcMGR service and therefore inherit the same permissions as the Oracle ProcMGR service.

## See Also

"Setting Up Process Scheduler on Windows," Setting Up Process Scheduler Security

## Task 3-1-11: Restricting Domain Process Privileges

This section discusses:

- Understanding Domain Process Privileges
- Setting TM\_CPAU Environment Variable

### Understanding Domain Process Privileges

For PeopleSoft systems, the Oracle ProcMGR service (*tuxipc.exe*) is responsible for starting Oracle Tuxedo domain processes on Microsoft Windows. By default, domain processes run as the same user ID that the service is running as. In a default installation, the service is configured to log on to Microsoft Windows as the Local System user. Microsoft does not support assigning network privileges to the Local System user for security reasons, but the Local System user otherwise has full administrative access to the local system.

In this configuration, PeopleSoft PeopleTools domain processes also run as the Local System user, which presents several potential issues, including:

- PeopleSoft PeopleTools domain processes are unable to access network resources.
- PeopleSoft PeopleTools domain processes run with more privileges than are necessary. A compromised PeopleSoft PeopleTools process will have full access to the local system and could potentially be used to gain unauthorized access to the local system.
- All PeopleSoft PeopleTools domain processes on the system run as the same user ID.

These problems are not present on UNIX systems where domain processes are always started as the user that runs *tadmin* (by way of *PSADMIN* for PeopleSoft installations) to boot the domain. UNIX systems therefore support multiple domains, each running under different user IDs, with only the desired local privileges, and with no undesirable restrictions to network resources.

For Microsoft Windows platforms, you can use the Oracle Tuxedo `TM_CPAU` environment variable to achieve behavior similar to UNIX systems. If `TM_CPAU` is set to *YES* before `tuxipc` is started, `tuxipc` creates an Oracle Tuxedo process that belongs to the user who initiated `tmboot`. If the Oracle ProcMGR service (`tuxipc.exe`) is started with the `TM_CPAU=YES` environment variable set, then domain processes will run as the user ID used to run `tmadmin` (`PSADMIN`) to boot the domain.

Using the `TM_CPAU` environment variable enables a variety of configuration options, including:

- The Oracle ProcMGR service can be run as the Local System user, but domain processes can be run using a minimally privileged user. This reduces the chance of a compromised PeopleSoft PeopleTools process being used to gain unauthorized access to the system. Note that the option "Allow services to interact with Desktop" should *not* be selected.
- The Oracle ProcMGR service can be configured to log on to Microsoft Windows using a minimally privileged user ID and PeopleSoft PeopleTools processes can run as a user with more privileges than the Oracle Tuxedo user ID. For example, the Oracle Tuxedo user ID could have read-only access to `PS_CFG_HOME`, but the PeopleSoft PeopleTools user could have read-write access. The Oracle Tuxedo user ID does not actually require read access to `PS_HOME`. When `CreateProcessAsUser` runs, access to the executable to start is evaluated using the user ID that the process will run as.
- A single Microsoft Windows system can be used to host multiple PeopleSoft PeopleTools installations that are each administered by a different user. A non-administrative user ID used to boot one domain will have no privileges to processes started with a different user ID.
- Domain processes can be identified and managed in Windows Task Manager by a non-administrative user.

See File Formats, Data Descriptions, MIBs, and System Processes Reference, Oracle Tuxedo Reference Topics, [http://docs.oracle.com/cd/E35855\\_01/tuxedo/docs12c/rf5/rf5.html](http://docs.oracle.com/cd/E35855_01/tuxedo/docs12c/rf5/rf5.html).

## Setting `TM_CPAU` Environment Variable

This is a recommended step. Perform this step only if Local System account is used in the task Setting Up the Windows Services for Oracle Tuxedo.

To set the `TM_CPAU` environment variable:

1. Access the Control Panel, and then select System and Security, System, on Microsoft Windows 8 or 2012 R2.
2. Select Advanced system settings.
3. Select the Advanced tab.
4. Click Environment Variables.
5. In the System variables area, click New to add a new environment variable.
6. Enter `TM_CPAU` as the variable name, `YES` as the value, and click OK three times to close the dialog boxes.
7. Restart your machine.

## Task 3-1-12: Setting Up the Windows Services for Oracle Tuxedo

To set up the Microsoft Windows services for Oracle Tuxedo:

1. Log on again as the Application Server Administrator, `TUXADM`, or a designated user ID.
2. Open the Control Panel and double-click Administrative Tools.
3. Select Computer Management and expand Services and Applications.
4. Select Services and locate the service labeled `ORACLE ProcMGR V12.2.2.0.0_VS2015`.  
Double-click `ORACLE ProcMGR V12.2.2.0.0_VS2015` to open the properties dialog box.

5. On the General tab, if the Stop button is enabled, click it to stop the current ORACLE ProcMGR V12.2.2.0.0\_VS2015 process.
6. Select Log On.
7. Choose either Local System account or This account.


If you select This account, as shown in this example, be sure to specify a user with the appropriate permissions, and then enter and confirm the password.

---

**Note.** The option used—Local System account or This account—must be consistent with your ODBC catalog definition, due to registry operations. For example, if you use the Local System Account option, you must also catalog your ODBC data source using System DSN.

---


See Checking the Windows Service Account.

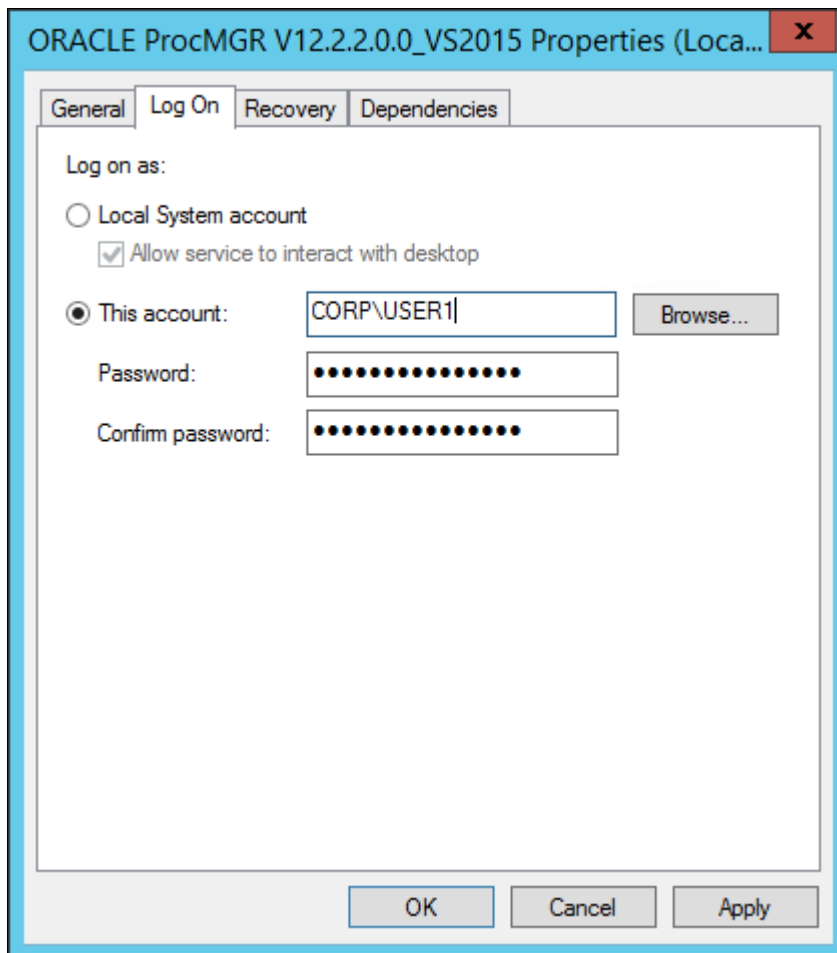

ORACLE ProcMGR V12.2.3.0.0\_VS2015 Properties dialog box: Log On tab

## 8. Select General.

Make sure that Startup Type is set to *Automatic*, as shown in this example.

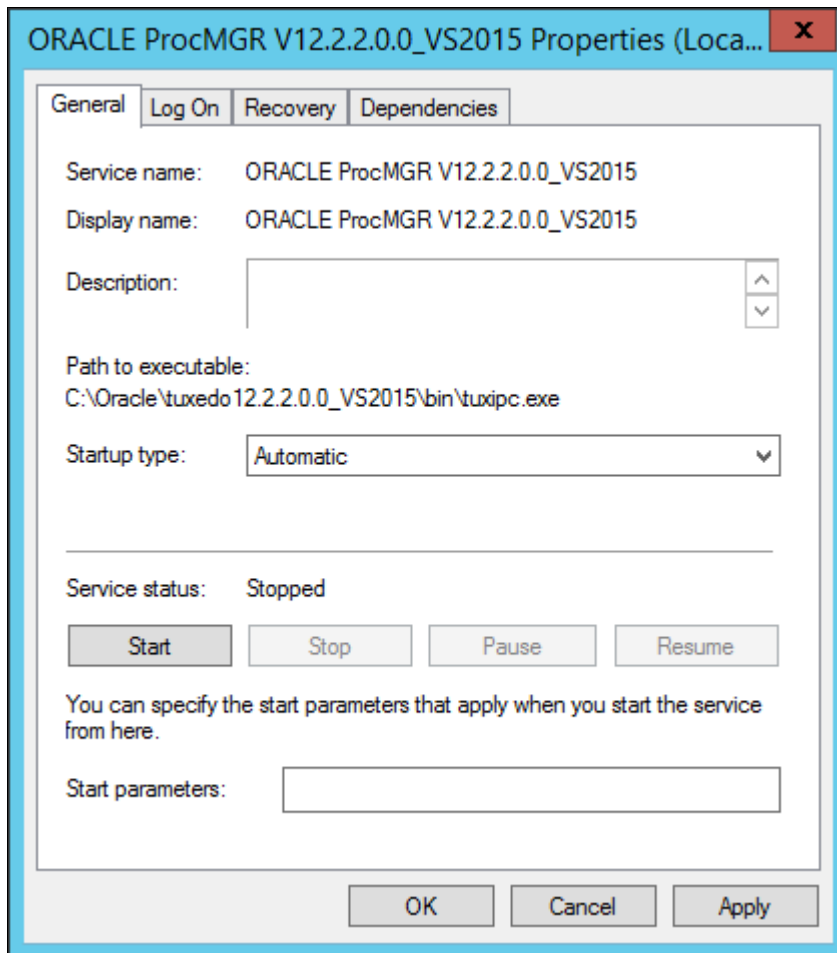

ORACLE ProcMGR V12.2.3.0.0\_VS2015 Properties dialog box: General tab

## 9. Click Start.

The status Started appears both on the General tab of the Oracle ProcMGR V12.2.2.0.0\_VS2015 Properties dialog box and in the Services dialog box. Click OK to close the dialog box.

10. As mentioned, unless you intend to use the Tuxedo Web Monitor, you should disable the TListen 12.2.2.0.0\_VS2015 (Port: *PORT*) service, where *PORT* is the port number you entered during the installation. The default is 3050.

### Task 3-1-13: Verifying the Server Installation on Microsoft Windows

At this point, you should verify that the server installation was successful.

To verify the installation:

1. Open a command prompt.
2. Set the TUXDIR environment variable; for example:  

```
set TUXDIR=C:\oracle\tuxedo12.2.2.0.0_VS2015
```
3. Go to the directory where you installed Oracle Tuxedo, *TUXDIR*, and then to the bin sub-directory. For

example:

```
C:\oracle\tuxedo12.2.2.0.0_VS2015\bin
```

4. Issue this command:

```
tmadmin -v
```

The command will return the Oracle Tuxedo version that is installed. For example:

```
INFO: Oracle Tuxedo, Version 12.2.2.0.0_VS2015, 64-bit, Patch Level 016
```

If you do not see the desired output, review your steps and reinstall Oracle Tuxedo 12cR2\_VS2015.

5. Open the Microsoft Windows registry, for example by selecting Start, Run, regedit.

Verify that the following key is created in the Windows registry:

```
HKEY_LOCAL_MACHINE\SOFTWARE\ORACLE\TUXEDO\12.2.2.0.0_VS2015
```

### Task 3-1-14: Removing Existing Oracle Tuxedo Installations from UNIX (Optional)

You may have older versions of Oracle Tuxedo installed on your system from an earlier version of PeopleSoft PeopleTools. If you are completely upgrading to PeopleSoft PeopleTools 8.56 from an earlier version of PeopleSoft PeopleTools and you do not require the older Oracle Tuxedo anymore, then, you may uninstall it.

---

**Note.** It is not mandatory to uninstall older Oracle Tuxedo versions from the machine where you are installing Oracle Tuxedo 12cR2, as older Oracle Tuxedo versions and Oracle Tuxedo 12cR2 can exist on the same machine.

---

You may have to remove your Oracle Tuxedo installation on UNIX for the following reasons:

- You are having problems starting Oracle Tuxedo and decide to reinstall.
- You no longer need Oracle Tuxedo on a machine.

To remove Oracle Tuxedo from UNIX:

1. Using PSADMIN, shut down any application server, Process Scheduler, and Search server domains that may be running on the machine.
2. Use the UNIX `rm` command to directly remove the Oracle Tuxedo installation.  
Be sure to remove the directory containing Oracle Tuxedo, referred to here as *TUXDIR*.
3. Remove the TUXDIR environment variable and any entries containing your platform-specific LIBRARY PATH and PATH environment variables.

### Task 3-1-15: Completing the Preinstallation Checklist on UNIX

We recommend that you complete the following preinstallation checklist before you begin the Oracle Tuxedo installation. The checklist includes various parameters with descriptions and example values. Specify your values in the Real Value column. Completing this information first should save you time during your installation.

Item	Description	Example Value	Real Value
ORACLE_HOME	The high level installation directory. You specify this value in the silent installation file.	/oracle	<enter value>

Item	Description	Example Value	Real Value
ORACLE_HOME_NAME	The name of the current Oracle installation. This identifies the Oracle Tuxedo installation in the Oracle Universal Installer, when reviewing the Installed Products list.	tuxedo1222	<enter value>
TUXDIR	The full path to the Oracle Tuxedo installation. The installer creates this as ORACLE_HOME/tuxedo12.2.2.0.0	/oracle/tuxedo12.2.2.0.0	<enter value>
Username	The UNIX user name of the Application Server Administrator (Oracle Tuxedo owner). See the next section for instructions.	tuxedo	<enter value>
UNIX_GROUP_NAME	The UNIX group name of the Oracle Tuxedo owner. See the next section for instructions.	tuxedo	<enter value>
FROM_LOCATION	The full path to the directory containing the products to be installed.	/home/temp/Disk1/stage/products.xml	

**Note.** You can select any user name and group name you want; however, you might want to use the "tuxedo" convention for simplicity.

## Task 3-1-16: Designating the Oracle Tuxedo Owner on UNIX

A new or existing user must be designated as the Oracle Tuxedo owner.

**Note.** For Oracle Tuxedo 11gR1 and later releases, the application server can be booted only by the Oracle Tuxedo owner or the group that the owner is in. The predefined UNIX "other" group does not have read or execute permission. If it is required that members of the "other" group be able to boot and shut down an application server domain, you must manually give read and execute permissions to all files and folders under the *TUXDIR/locale* and *TUXDIR/udataobj* directories.

To designate the Oracle Tuxedo owner:

1. Log in as root.
2. Create the UNIX group and the user name of the individual who will be the owner of Oracle Tuxedo.

Using the values from the preinstallation checklist, create the group and specify the group name. Then create the user who will be the Oracle Tuxedo owner, specifying the user name, group name, and home directory, denoted by TUXDIR from the checklist.

---

**Note.** The utility that you use to create the user and group varies, depending on your operating system. For example, HP-UX Itanium uses the "sam" utility, IBM AIX uses the "smit" utility, and so on. For the exact utility, refer to your operating system documentation.

---

## Task 3-1-17: Installing Oracle Tuxedo in Silent Mode on UNIX

This section discusses:

- Understanding the Silent Mode Installation on UNIX
- Running the Silent Mode Installation on UNIX

### Understanding the Silent Mode Installation on UNIX

You can carry out a silent installation of Oracle Tuxedo 12cR2 by providing all the required settings in a response file. With silent installation there is little or no user interaction.

---

**Note.** Console mode installation is not supported for Oracle Tuxedo 12cR2.

---

Use a text editor to modify the values in the response file according to your installation requirements. Here is a sample response file:

```
#
# ..... Silent Installation Properties file .....
#

RESPONSEFILE_VERSION=2.2.1.0.0
#Unix group to be set for the inventory directory. Valid only in Unix⇒
platforms.
UNIX_GROUP_NAME="dba"

#Complete path of the Oracle Home.
ORACLE_HOME="/home/psftuser/oracle"

#Oracle Home Name. Used in creating folders and services.
ORACLE_HOME_NAME="tuxedo1222"
DEINSTALL_LIST={"Tuxedo","12.2.2.0.0"}
SELECTED_LANGUAGES={"en"}
COMPONENT_LANGUAGES={"en"}
INSTALL_TYPE="Full Install"
ENABLE_TSAM_AGENT=false
LDAP_SUPPORT_SSL=false
TLISTEN_PORT="3050"
MIN_CRYPT_BITS_CHOOSE=0
MAX_CRYPT_BITS_CHOOSE=256
INSTALL_SAMPLES=true
ENCRYPT_CHOICE=0
CONFIG_TLISTEN=true
TLISTEN_PASSWORD=password
```



## Running the Silent Mode Installation on UNIX

The following procedure assumes that:

- You saved and extracted the installation files from Oracle Software Delivery Cloud in the directory *TUX\_INSTALL*.
- You installed the supported version of Java 8.

The command requires the full path for the JRE file, such as `/home/java/jre1.8.0_65`.

To install Oracle Tuxedo on UNIX or Linux:

1. If it does not exist, use a text editor, such as "vi", to create the central inventory location file, named `oraInst.loc`, in a convenient directory.

If you have previously installed Oracle software on the system, the `oraInst.loc` file may already exist. The `oraInst.loc` file contains only the following two lines:

```
inventory_loc=/home/psftuser/oraInventory
inst_group=ccpt
```

The `oraInst.loc` file contains the following information:

- `inventory_loc` — Specify the full path to the directory where you want the installer to create the inventory directory. The location in the example is `/home/psftuser/oraInventory`.
  - `oui_install_group` — Specify the name of the group whose members have write permissions to this directory. The group name in the example is `ccpt`.
2. Create a response file as described in the previous section and copy it to *TUX\_INSTALL*.
  3. Open a command prompt and change directory to *TUX\_INSTALL/Disk1/install*.
  4. If this is the first time you are installing on your system (that is, there is no pre-existing Oracle inventory location, and you had to create the `oraInst.loc` file in the first step), use the following command to perform a silent installation:

```
./runInstaller -responseFile <complete_filename> -silent -invPtrLoc =>
<complete_inventory_filename> -jreLoc <JRE file location>
```

Specify the full path and name for the response file, the `oraInst.loc` file, and the JRE file. For example:

```
./runInstaller -responseFile /home/temp/response.rsp -silent -invPtrLoc=>
/home/psftuser/oraInventory/oraInst.loc -jreLoc /home/java/jre1.8.0_65
```

5. If you have previously installed an Oracle product on your system and do not need to specify an Oracle inventory location, use the following command to perform a silent installation:

```
./runInstaller -responseFile <complete_filename> -silent -jreLoc <JRE=>
file location>
```

Specify the full path and name for the response file and the JRE file. For example:

```
./runInstaller -responseFile /home/temp/response.rsp -silent -jreLoc =>
/home/java/jre1.8.0_102
```

6. After you enter the commands in the previous steps, the installer is launched in silent mode, and a progress indicator tracks the installation.

The progress indicator includes the name and location of the installation log file. When the installation is complete, you should see a successful completion message.

## Task 3-1-18: Installing the Oracle Tuxedo Patch on UNIX

These instructions assume that you have installed the base Oracle Tuxedo 12cR2, and have downloaded the platform-specific version of the rolling patch to a directory referred to here as *TUX\_INSTALL*.

To install the patch:

1. Stop all PeopleSoft PeopleTools domains that are running and using your Oracle Tuxedo installation.

Shut down any tlisten processes.

2. Verify that the environment variable TUXDIR is set to the Oracle Tuxedo installation location, such as `/home/psftuser/oracle/tuxedo12.2.2.0.0`.

---

**Note.** The TUXDIR directory should include subdirectories bin and udataobj.

---

3. Verify that the environment variable ORACLE\_HOME is set to the *ORACLE\_HOME* location you specified when you installed Oracle Tuxedo, such as `/home/psftuser/oracle`.

---

**Note.** This is the parent directory for the Oracle Tuxedo installation. It should include subdirectories OPatch and oui.

---

4. Verify that the environment variable JAVA\_HOME is set to the 64-bit JDK 1.8 directory, as mentioned in the prerequisites section.

5. Go to the directory where you downloaded the patch zip file from My Oracle Support, *TUX\_INSTALL*, and extract the file.

This creates a directory 25391869, which includes a zip file with the patch.

6. Open a command prompt and go to the *TUX\_INSTALL/25391869* directory.

7. Run the following command:

```
$ORACLE_HOME/OPatch/opatch apply 25391869.zip
```

---

**Note.** The patch installer backs up all files being patched. The backup copy is located in the directory *ORACLE\_HOME\patch\_storage\*. Do not delete these backup files. They will be used if you need to remove the patch installation.

---

8. If OPatch cannot locate the Oracle inventory, you may see a messages such as the following:

```
Applying interim patch 25391869 to OH '/oracle'
Verifying environment and performing prerequisite checks.
OPatch system modification phase did not start
```

In this case, specify the full path to the Oracle inventory file oraInst.loc, with the *invPtrLoc* option:

```
%ORACLE_HOME%/OPatch/opatch.bat apply 25391869.zip -invPtrLoc <full_⇒
path_to_inventory_file>
```

## Task 3-1-19: Uninstalling the Oracle Tuxedo Patch from UNIX

To remove an Oracle Tuxedo installation, you must first remove the rolling patch, as follows:

1. Stop all PeopleSoft PeopleTools domains that are running and using your Oracle Tuxedo installation.
2. Verify that the environment variable TUXDIR is set to the Oracle Tuxedo installation location, such as `/home/psftuser/oracle/tuxedo12.2.2.0.0`.

3. Verify that the environment variable `ORACLE_HOME` is set to the *ORACLE\_HOME* location you specified when you installed Oracle Tuxedo, such as `/home/psftuser/oracle`.
4. Open a command prompt and run the following command:
 

```
$ORACLE_HOME/OPatch/opatch rollback -id 25391869
```

### Task 3-1-20: Uninstalling Oracle Tuxedo from UNIX Using Silent Mode

To remove the Oracle Tuxedo 12cR2 installation from UNIX:

1. Open a command prompt and change directory to *TUX\_INSTALL/Disk1/install*.
2. Run the following command, where `ORACLE_HOME` refers to the high-level installation director, and `REMOVE_HOMES` refers to the directory to be removed:

```
./runInstaller -deinstall -silent ORACLE_HOME=<LOCATION_OF_ORACLE_HOME>=>
"REMOVE_HOMES={<LOCATION_OF_ORACLE_HOME_TO_BE_REMOVED>}"
```

For example:

```
./runInstaller -deinstall -silent ORACLE_HOME="/home/psftuser/oracle"=>
"REMOVE_HOMES={/home/psftuser/oracle}"
```

See Oracle Tuxedo documentation.

### Task 3-1-21: Verifying the Server Installation on UNIX

To verify that the server installation was successful:

1. Open a shell.
2. Change directory to *TUXDIR/bin*. For example:
 

```
/home/psftuser/oracle/tuxedo1222/bin
```
3. Issue the following command:
 

```
tmadmin -v
```

The command will return the Oracle Tuxedo version that is installed. For example:

```
INFO: Oracle Tuxedo, Version 12.2.2.0.0, 64-bit, Patch Level 016
```

If you do not see the desired output, review your steps and reinstall Oracle Tuxedo 12cR2.

### Task 3-1-22: Ensuring that Oracle Tuxedo Coexists with Earlier Versions

This section discusses:

- Understanding the Use of Multiple Oracle Tuxedo Versions
- Checking Your Environment Variables
- Changing the TListen Port

## Understanding the Use of Multiple Oracle Tuxedo Versions

Earlier versions of PeopleSoft PeopleTools rely on earlier versions of Oracle Tuxedo—for example, PeopleSoft PeopleTools 8.49 uses Oracle Tuxedo 9.1, and releases 8.44 to 8.48 use Oracle Tuxedo 8.1. If you are installing only PeopleSoft PeopleTools 8.56, you can safely skip this section. If you need to run application servers on PeopleSoft PeopleTools 8.56 and earlier PeopleSoft PeopleTools versions on the same machine, read this section to learn about coexistence issues. Although Oracle Tuxedo 12cR2 coexists with earlier Oracle Tuxedo versions on the same machine, you may need to take a number of manual steps to ensure that these products share the same environment gracefully.

## Checking Your Environment Variables

Installing Oracle Tuxedo changes your `TUXDIR` and `PATH` environment variables. Although you do not need to change these environment variables to successfully run PeopleSoft PeopleTools 8.56 with Oracle Tuxedo 12cR2, earlier versions of PeopleSoft PeopleTools rely on these environment variables being set.

To change your environment variables manually:

1. Set your `TUXDIR` environment variable to reflect the installation directory of your earlier Oracle Tuxedo release.

For example, Oracle Tuxedo 8.1 may be installed to `C:\tux8.1`. This means that `TUXDIR=C:\tux8.1` is the correct setting.

2. Your `PATH` environment variable must contain `TUXDIR\bin` for the earlier Oracle Tuxedo version before any entries for `TUXDIR\bin` for Oracle Tuxedo 12cR2.

For example the setting `PATH=C:\winnt;C:\oracle\tuxedo12.1.3.0.0_VS2012\bin;C:\tux8.1\bin` will cause your pre-8.49 domains to no longer work. You would need to change this to `PATH=C:\winnt;C:\tux8.1\bin;C:\oracle\tuxedo12.1.3.0.0_VS2012\bin` to work with pre-PeopleSoft PeopleTools 8.49 domains.

---

**Note.** PeopleSoft PeopleTools 8.44 and later do not use environment variables to discover the installation location of Oracle Tuxedo 8.1 and later. The `PSADMIN` tool retrieves these values from the Microsoft Windows registry.

---

3. Your library path on UNIX (whichever of the environment variables `LD_LIBRARY_PATH`, `LIBPATH`, or `SHLIB_PATH` is appropriate for your platform) must contain `TUXDIR/lib` for the earlier Oracle Tuxedo version before any entries for Oracle Tuxedo 12cR2.

For example the setting `LD_LIBRARY_PATH=/lib:/usr/lib:/home/user/Oracle/tuxedo12cR2/lib:/prod/tuxedo/8.1/lib`, will cause your pre-8.49 domains to no longer work. You would need to change this to `LD_LIBRARY_PATH=/lib:/usr/lib:/prod/tuxedo/8.1/lib:/home/user/Oracle/tuxedo12cR2/lib` for your pre-8.49 domains to work.

Alternatively, you can set the environment variables for a desired release using these steps:

1. Go to the `TUXDIR` directory for the release that you want to run and run the command `./tux.env`.

This command sets the environment variables needed to run Oracle Tuxedo.

2. Verify the correct Oracle Tuxedo version by running this command:

```
tmadmin -v
```

See [Verifying the Server Installation on UNIX](#).

## Changing the TListen Port

Installing Oracle Tuxedo 12cR2 and earlier creates a new service known as TListen. In most cases, you can disable this service as it is not required to run PeopleSoft PeopleTools application server domains. However, if you intend to use the Tuxedo Web Monitor you may wish to ensure that there is no port clash with earlier versions. This port is determined at installation and should be changed to a port other than the default 3050 if you intend on using the TListen service for Oracle Tuxedo 12cR2 and earlier Oracle Tuxedo versions concurrently.



## Chapter 4

# Using the PeopleSoft Installer

This chapter discusses:

- Understanding the PeopleSoft Installer
- Prerequisites
- Obtaining the PeopleSoft Installation Files from Oracle Software Delivery Cloud
- Running the PeopleSoft Installer
- Verifying Necessary Files for Installation on Windows
- Installing PeopleSoft Application Software
- Installing the PeopleTools Client Files
- Mapping a Drive on the Install Workstation

## Understanding the PeopleSoft Installer

---

This section discusses:

- Defining the PeopleSoft Installer
- Defining Supported Server Combinations

## Defining the PeopleSoft Installer

The PeopleSoft Installer is a Java-based tool that delivers software to your servers and to the PeopleTools Client. You can install the whole range of PeopleSoft servers and client with the PeopleSoft installer. You can install the server and client software separately or together.

---

**Note.** You must install the necessary web server products and any additional component software as described in the previous chapters before you run the PeopleSoft Installer.

---

The PeopleSoft Installer enables you to transfer files directly to various PeopleSoft servers—including application servers, batch servers, web servers, and database servers—without first copying all files to a file server. You can also use the PeopleSoft Installer to install the files for the PeopleTools Client.

You run the PeopleSoft installer to install the necessary products on the target machines. Which files are installed depends on the operating system on the target machine, the database platform, and the selected server option. The PeopleSoft Installer installs files directly to Microsoft Windows, UNIX, and Linux machines. PeopleSoft PeopleTools and PeopleSoft applications use the same PeopleSoft installation template. This chapter discusses the installation of PeopleSoft PeopleTools, followed by the installation of PeopleSoft application software and the application-specific Multilanguage files.

All components of the PeopleSoft Architecture must be installed on each server. If you are not able to download and extract the PeopleSoft installation files directly on a UNIX machine, for example, you can download to the Windows file server and then FTP the files to your UNIX system.

You can install multiple logical servers to the same machine. For example, you can have the application server and the batch server on the same machine. But, if you want to install different servers to different machines, you have to run the PeopleSoft Installer once for each server.

Before beginning the installation, be sure to review the information about the various PeopleSoft servers and clients in the chapter "Preparing for Installation."

## See Also

"Preparing for Installation," Planning Your Initial Configuration

## Defining Supported Server Combinations

The following table lists the supported operating systems for the various PeopleSoft servers for your database platform. For more detailed information, consult the PeopleSoft product certifications area of My Oracle Support.

Supported operating systems for database servers	Supported operating systems for application servers and batch servers	Supported operating systems for file servers	Supported operating systems for web servers
<ul style="list-style-type: none"> <li>HP-UX Itanium</li> <li>IBM AIX on POWER Systems (64-bit)</li> <li>Linux x86-64</li> <li>Microsoft Windows x64 (64-bit)</li> <li>Oracle Solaris on SPARC (64-bit)</li> </ul>	<ul style="list-style-type: none"> <li>HP-UX Itanium</li> <li>IBM AIX on POWER Systems (64-bit)</li> <li>Linux x86-64</li> <li>Microsoft Windows x64 (64-bit)</li> <li>Oracle Solaris on SPARC (64-bit)</li> </ul>	Microsoft Windows x64 (64-bit) Linux or UNIX with network file system (NFS) or equivalent support	<ul style="list-style-type: none"> <li>HP-UX Itanium (64-bit)</li> <li>IBM AIX on POWER Systems (64-bit)</li> <li>Linux x86-64</li> <li>Microsoft Windows x64 (64-bit)</li> <li>Oracle Solaris on SPARC (64-bit)</li> </ul>

## See Also

My Oracle Support, Certifications

## Prerequisites

Verify that you fulfill the following requirements before beginning the installation:

- The PeopleSoft Installer requires Java Virtual Machine (JVM), which is bundled for all OS platforms. The PeopleSoft Installer directly uses the bundled JVM, and therefore does not need to search for the JVMs in the directories in which users would typically install JVM. PeopleSoft PeopleTools supports JRE/JDK 1.8 and higher patch level. See My Oracle Support for information on the correct JRE version for your system.

See My Oracle Support, Certifications.

- Before running the PeopleSoft installer, you must verify that you have the correct patches for your JVM level. Check My Oracle Support and your vendor for required patches.



See Operating System, RDBMS, & Additional Component Patches Required for Installation PeopleTools, My Oracle Support, (search for the article title).

- Make sure you have at least 4.5 GB of free space to perform your installation.

See Running the PeopleSoft Installer.

- The installation process also requires at least 2.0 GB of free temporary disk space, which is needed only for the duration of the process. The process uses the directory defined by the TEMP environment variable on your installation computer or the directory specified by the -tempdir option when using setup.sh to install.

Oracle strongly recommends that you use the -tempdir option to install, using the following guidelines:

- Do not use /tmp as the temporary directory.
- Do not specify /tmp as the explicit temporary directory for the -tempdir option.
- Do not specify a directory that is on a shared drive.
- Do not specify a directory that is inside the location where PeopleSoft PeopleTools is being installed; for example, *PS\_HOME*/temp.
- The user who installs PeopleSoft PeopleTools must be root or the owner of *PS\_HOME*.  
*PS\_HOME* is used throughout this installation guide to refer to the high-level directory where your PeopleSoft PeopleTools software is installed. The documentation may also use the notation \$PS\_HOME or %PS\_HOME% to refer to the PS\_HOME environment variable in a code sample.
- You can install the PeopleSoft Application software to *PS\_HOME*, or to another directory outside *PS\_HOME*. This documentation refers to the directory where you install the PeopleSoft application software as *PS\_APP\_HOME*.

See "Preparing for Installation," Defining Installation Locations.

- You must have admin privileges to install the PeopleSoft web server.
- You can install the PeopleSoft web server to *PS\_HOME*, or to another directory outside *PS\_HOME*. This documentation refers to the directory where you install the PeopleSoft web server as *PIA\_HOME*.

See "Preparing for Installation," Defining Installation Locations.

- If your installation requires any PeopleSoft PeopleTools patches, you can apply the code (that is, the contents of the zip file you downloaded from My Oracle Support) after running the PeopleSoft Installer. Do not apply the database instructions at this time; the database objects will be applied later during the install. Be sure to read and follow the instructions provided with the PeopleSoft PeopleTools patches.

## See Also

My Oracle Support, Certifications

## Task 4-1: Obtaining the PeopleSoft Installation Files from Oracle Software Delivery Cloud

---

You obtain the PeopleSoft PeopleTools, PeopleSoft application, and multi-language software by downloading them as zip files from Oracle Software Delivery Cloud. At this point you may have already downloaded the necessary files. However, if you have not yet downloaded the files, this section includes information on finding and using the installation files.

See "Preparing for Installation," Using Oracle Software Delivery Cloud to Obtain Installation Files.

See Oracle Software Delivery Cloud, <https://edelivery.oracle.com>.

To obtain the installation files for PeopleSoft PeopleTools and PeopleSoft applications from Oracle Software Delivery Cloud:

1. After logging in to Oracle Software Delivery Cloud, enter the name of a specific PeopleSoft application product in the search box.

For example, for PeopleSoft Human Capital Management, enter and select PeopleSoft Enterprise Human Resources. For PeopleSoft Financials and Supply Chain Management, enter and select PeopleSoft Enterprise Financials.

---

**Note.** The installation files for PeopleSoft PeopleTools are included with the PeopleSoft application installation files. If you want to obtain the files for PeopleSoft PeopleTools only, enter PeopleSoft Enterprise PeopleTools in the Product field, and select PeopleSoft Enterprise PeopleTools - Enterprise Development from the drop-down list.

---

2. Click Select Platform, select the operating system you are running on, and then click Select.

Note that you must unzip the zip files on the operating system platform for which they are intended. For example, if you download the files for Oracle Solaris, you must unzip the files on an Oracle Solaris operating system. If you unzip the files on a Microsoft Windows machine into a staging directory, and then move the directory to an Oracle Solaris machine, the staging area files may be corrupted.

3. Click Continue.
4. In the Download Queue section, click the arrow for your PeopleSoft application to expand the selection.
5. Select the check boxes for all the products you want to download, and then click Continue.
6. Read the license agreement, select the check box to acknowledge that you accept the agreement, and then click Continue.
7. On the File Download window, click one of the filenames to download an individual zip file, or click Download to obtain all of the files.
8. For the PeopleSoft PeopleTools installation, when you unzip the files, extract them into a temporary directory, referred to here as *PS\_INSTALL*. The extracted files are loaded into directories Disk1, Disk2, Disk3, and so on.

For the PeopleSoft application, and other files, extract the zip files into a convenient local directory, referred to as *PS\_INSTALL*.

*For UNIX only:*

After you download the installation files from Oracle Software Delivery Cloud, if it is necessary to transfer the files to a UNIX computer using FTP, you must change the permissions to make them executable, for example using the `chmod +x` command. Change the mode to executable for the following files:

- *PS\_INSTALL*\Disk1\setup.sh
- Files in *PS\_INSTALL*\Disk1\InstData:
  - setup.aix
  - setup.hp-ia64
  - setup.linux
  - setup.solaris

## See Also

Application-specific installation instructions, My Oracle Support, (search for the PeopleSoft application)

## Task 4-2: Running the PeopleSoft Installer

---

This section discusses:

- Understanding the PeopleSoft Installer
- Starting the PeopleSoft Installer
- Installing PeopleSoft PeopleTools in GUI Mode
- Installing PeopleSoft PeopleTools in Console Mode

### Understanding the PeopleSoft Installer

The PeopleSoft Installer guides you through the process of installing files to your various servers. You must run the PeopleSoft Installer on each machine that you use for one or more PeopleSoft server. The specific options that you see during the installation procedure depend upon the operating system platform, database platform and so on.

Use the PeopleSoft Installer for:

- PeopleSoft PeopleTools
- PeopleSoft applications
- Multilanguage files
- PeopleTools Client files

The directory where the files are installed is referred to in this section as *PS\_HOME*. As described earlier in this documentation, you can configure your environment with separate installation locations for PeopleSoft PeopleTools and PeopleSoft applications. It is a good idea to use a directory name that indicates the application you are installing and the version number, such as HCM920 for the 9.2 version of PeopleSoft Human Capital Management.

See "Preparing for Installation," Defining Installation Locations.

You can run the installer in GUI mode, on Microsoft Windows operating systems, or in console (text) mode, on UNIX or Linux.

---

**Note.** The machine that you use to perform your PeopleSoft PeopleTools installation must be running in *256-color mode* or higher when running the PeopleSoft PeopleTools, PeopleSoft application, multilanguage, or PeopleSoft Pure Internet Architecture installation, and database configuration in Microsoft Windows. This is not necessary for UNIX or console mode.

---

The PeopleSoft Installer asks whether you want to install supporting features such as Environment Management Hub. Before you run the PeopleSoft Installer, you may want to consult supporting documentation to help you in choosing these options.

### See Also

*PeopleTools: Global Technology*

*PeopleTools: Change Assistant and Update Manager*

*PeopleTools: System and Server Administration*

My Oracle Support, Certifications

## Task 4-2-1: Starting the PeopleSoft Installer

After you download and extract the PeopleSoft PeopleTools installation files you can find the installer in *PS\_INSTALL/disk1*.

To start the PeopleSoft Installer on Microsoft Windows, type:

```
PS_INSTALL\disk1\setup.bat [command line options]
```

To start the PeopleSoft Installer on a supported UNIX or Linux operating system, type:

```
PS_INSTALL/disk1/setup.sh [command line options]
```

The following list includes options that you can use when running *setup.bat* and *setup.sh* on the command line, their allowed values, descriptions, and environment variables that must be set before using the options.

---

**Note.** Only the command line options listed in this documentation are supported for PeopleSoft installation. Note that the use of a response file for silent installation is not supported for the installer for PeopleSoft PeopleTools 8.56. For some of the installations described elsewhere in this documentation, such as PeopleSoft Pure Internet Architecture, the same options apply.

---

- Specify console or GUI mode with the `-i` option.

- To run in GUI mode:

```
setup.bat -i GUI
```

- To run in console mode:

```
setup.sh -i console
setup.bat -i console
```

- Specify the full absolute path to the Java (JRE or JDK) executable.

Use either of the options `-javahome` or `-LAX_VM` to specify the absolute path to the JRE or JDK executable, including the executable name. Use this option if your installation is different than the vendor-defined installation path. This is used by the installer as the runtime `javahome`.

On Microsoft Windows:

```
setup.bat -javahome D:\prod\java8\bin\java.exe
setup.bat -LAX_VM D:\prod\java8\bin\java.exe
```

On UNIX:

```
setup.sh -javahome /opt/java8/bin/java
setup.sh -LAX_VM /opt/java8/bin/java
```

- Run in debug mode to investigate basic installer features.
  1. Set the environment variable `LAX_DEBUG`; for example:

On Microsoft Windows:

```
set LAX_DEBUG=true
```

On UNIX:

```
export LAX_DEBUG=true
```

2. Run the installer; for example:

On Microsoft Windows:

```
setup.bat -DDEBUG=console
```

On UNIX:

```
setup.sh -DDEBUG=console
```

- Specify the temporary directory to extract temporary files.

This is recommended if you have less than 2 GB of space in your default temporary directory. See the Prerequisites section for information on choosing the temporary directory.

- On Microsoft Windows, set the environment variable %TMP%, and then run `setup.bat` without an option for the temporary directory; for example:

```
set TMP=D:\user\temp
setup.bat
```

- On UNIX, use the `-tempdir` option to specify the absolute path to the temporary directory; for example:

```
setup.sh -tempdir /opt/home/user/temp
```

- To use more than one of the preceding options, you can combine them in any order; for example:

```
setup.bat -i console -javahome D:\prod\java8\bin\java.exe
```

```
setup.sh -LAX_VM /opt/java8/bin/java -DDEBUG=console -i console
```

- To start the debugger in GUI mode:

1. Type the command; for example:

```
setup.bat -DDEBUG=console -i console
```

2. Press ENTER, and then hold down the CTRL key.

The GUI installer window opens, and a console window also opens with the debugger messages.


## Task 4-2-2: Installing PeopleSoft PeopleTools in GUI Mode

To install PeopleSoft PeopleTools with the PeopleSoft Installer in GUI mode:

1. Launch the installer. For example:

```
PS_INSTALL\disk1\setup.bat
```


Click Next when you see the Welcome screen for PeopleTools 8.56.

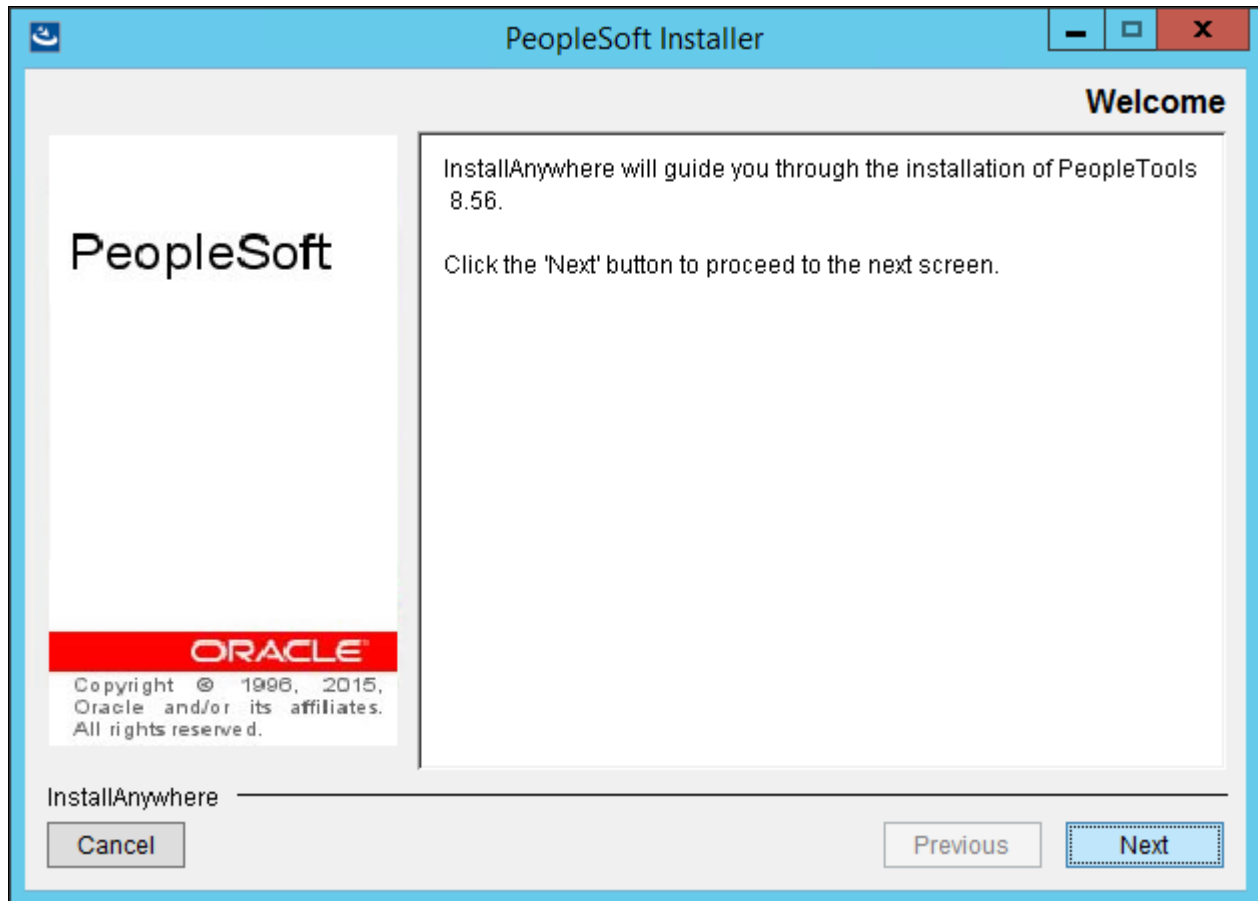

PeopleSoft Installer Welcome window

- 2. Click the radio button to accept the license agreement and click Next.

The License Agreement window includes the terms in several languages.

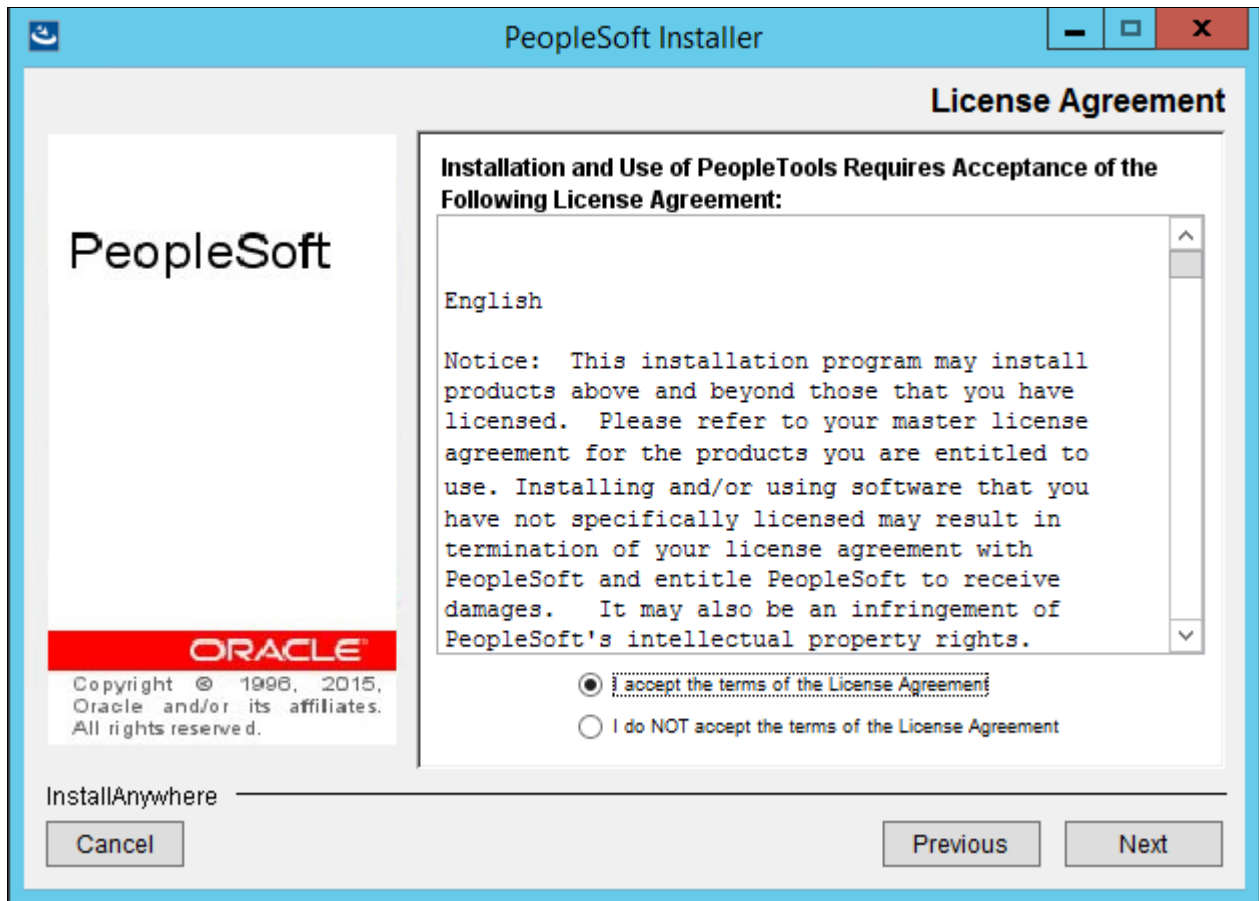

PeopleSoft Installer License Agreement window

3. Choose a Unicode or non-Unicode database and click Next.


---

**Note.** Unicode databases are recommended by Oracle. Some languages in a PeopleSoft installation are only supported in a Unicode database. Unicode databases can require more disk space than non-Unicode databases.

---

See *PeopleTools: Global Technology*.

This example shows the option Unicode Database (Recommended) selected.

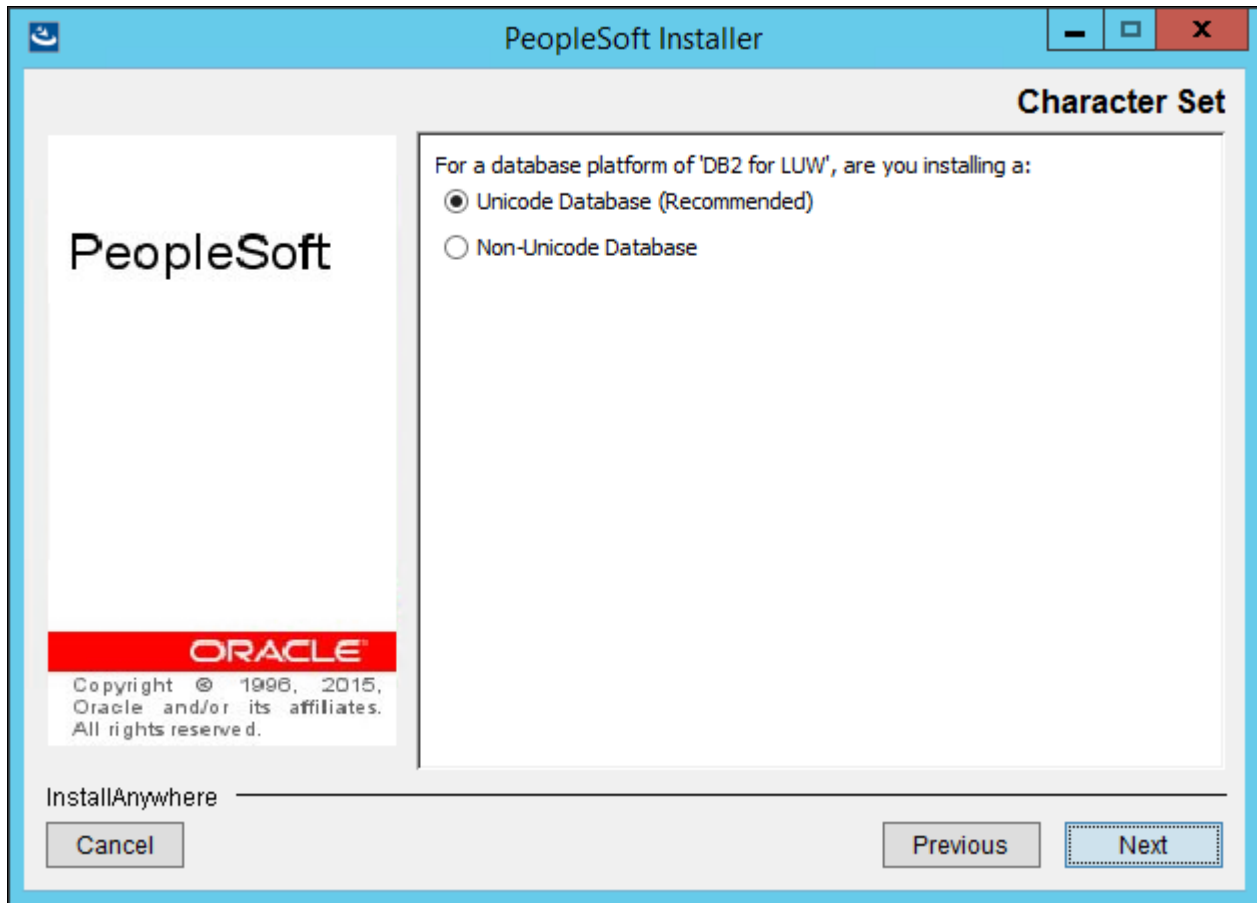


PeopleSoft Installer Character Set



4. Select the servers you want to install and click *Next*.

In this example the PeopleSoft Application Server, PeopleSoft Batch Server, PeopleSoft Database Server, PeopleSoft File Server, and PeopleSoft Web Server are selected.

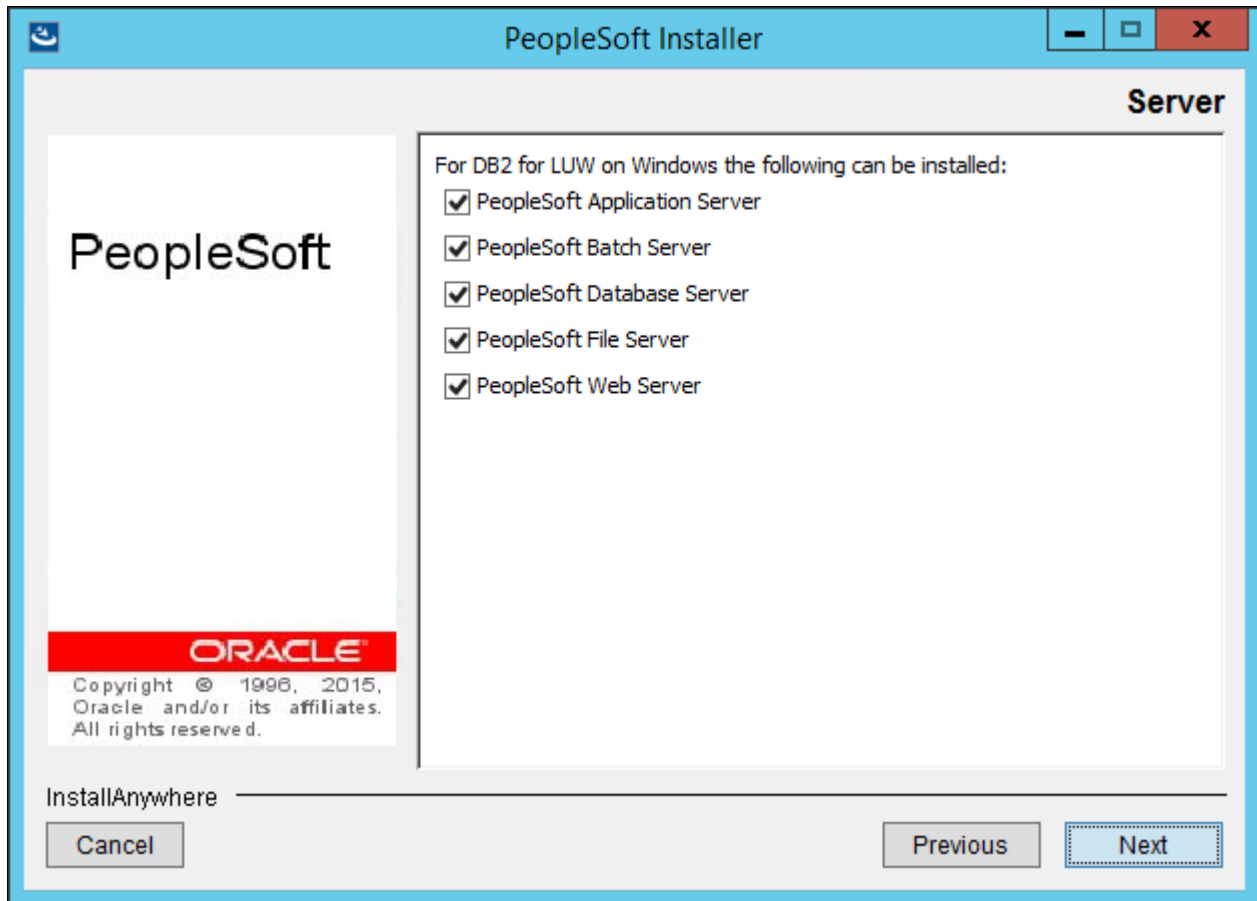

PeopleSoft Installer Server window

Use the following information to help you make your selection on the Server window:

- You can install multiple servers at the same time, but they will all be installed on the same machine. If you want to install servers on separate machines, you need to run the PeopleSoft Installer on each server machine.
- If you do not have admin privileges, you will not be able to install PeopleSoft web server. You will have to either acquire admin privileges or deselect the Web Server option to continue.
- You *must* install the PeopleSoft software on your database server in order to run the PeopleSoft Database Configuration Wizard. (Running the Database Configuration Wizard is discussed in the chapter on creating a database.)


5. Specify the directory where you want to install PeopleSoft PeopleTools, referred to in this documentation as *PS\_HOME*, in the Directory Name field, and click *Next*.

In this example, *PS\_HOME* is C:\PT8.56.

---

**Note.** Substitute your network drive and the directory name of your choice for the default selection. The installation directory name cannot contain a space. Note that directory names containing periods or non-US-ASCII characters may not work with some additional component software.


---

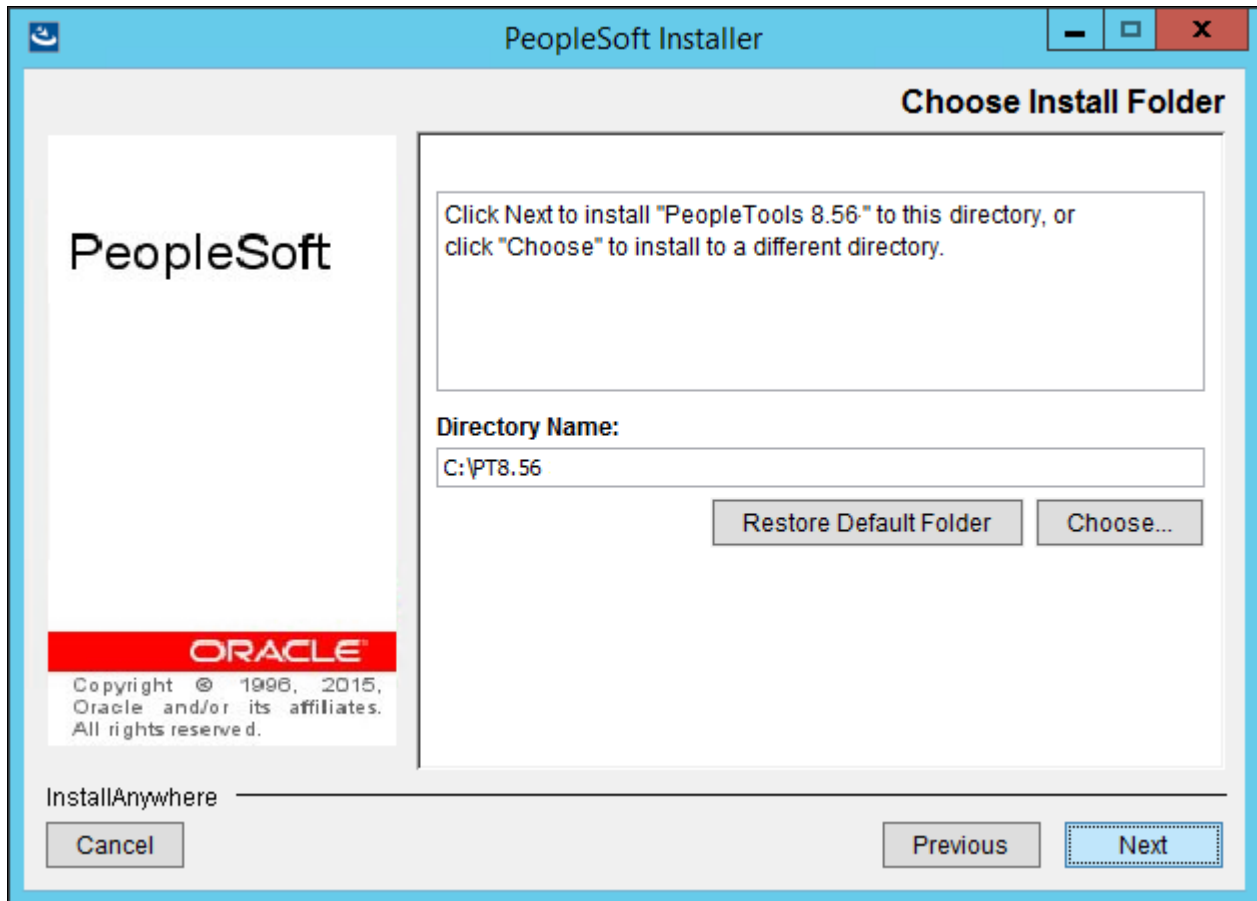

PeopleSoft Installer Choose Install Folder window


- 6. Specify the location of your Connectivity Program Directory and click *Next*.

The default location for the connectivity software for DB2/LUW (as set by the vendor) is: C:\Program Files\ibm\SQLLIB\BIN. If the database connectivity software was installed to a different directory, enter that path instead.

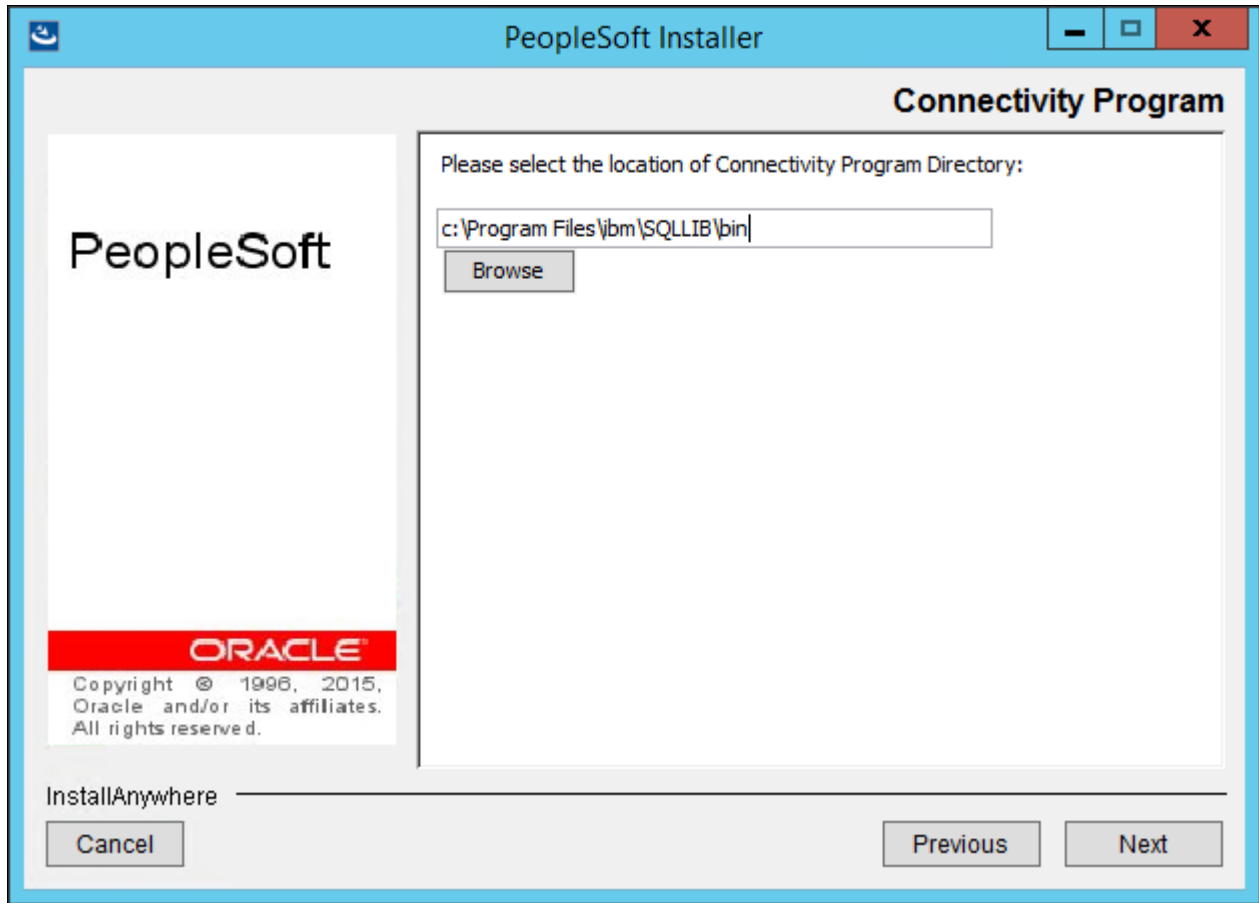

PeopleSoft Installer Connectivity Program


7. Depending on the PeopleSoft servers you selected, choose whether to install the PeopleSoft PeopleTools icons and click Next.

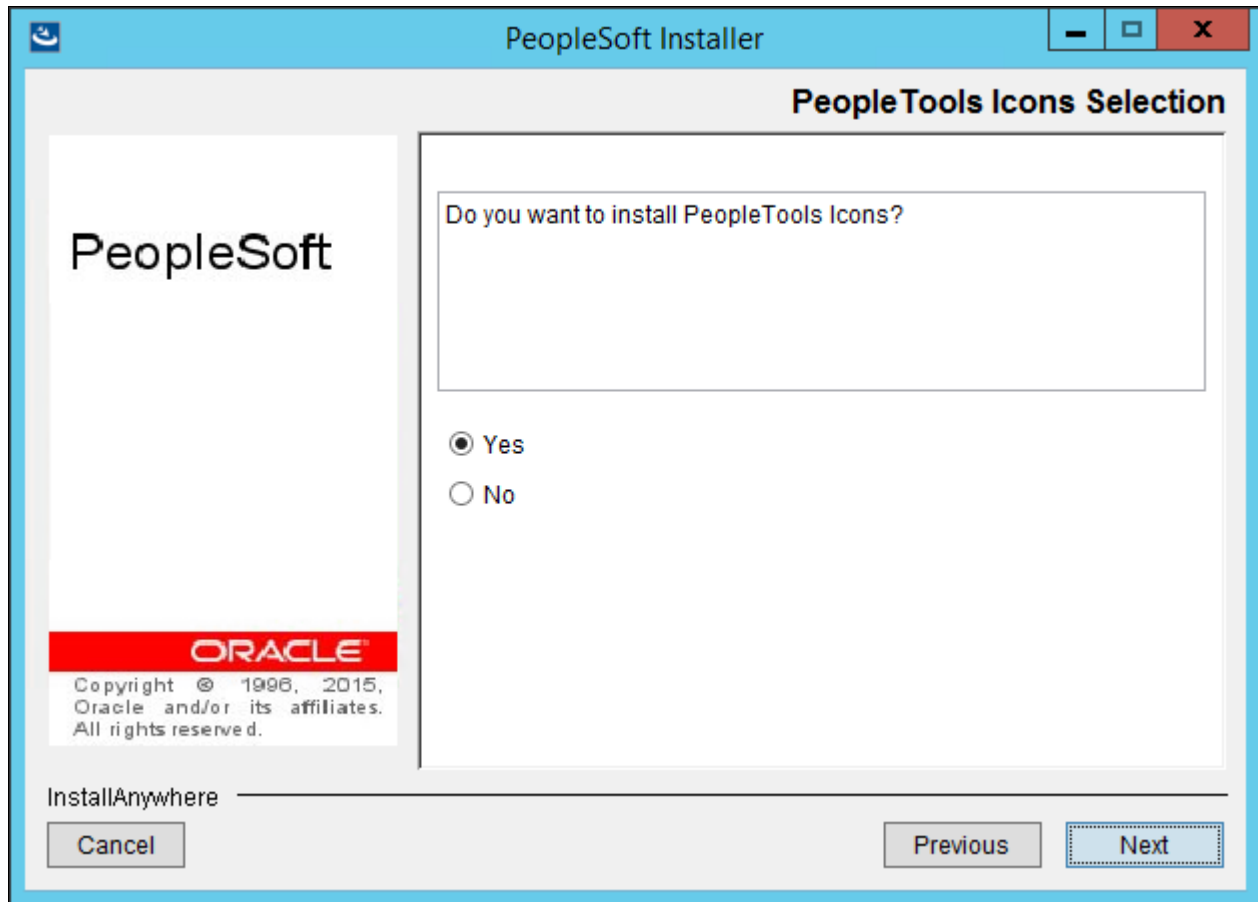

PeopleSoft Installer PeopleTools Icons Selection window

- 8. If you elected to install PeopleSoft PeopleTools icons, choose a valid group folder in which to create them and click Next.

This example shows the default group folder, PeopleTools 8.56.

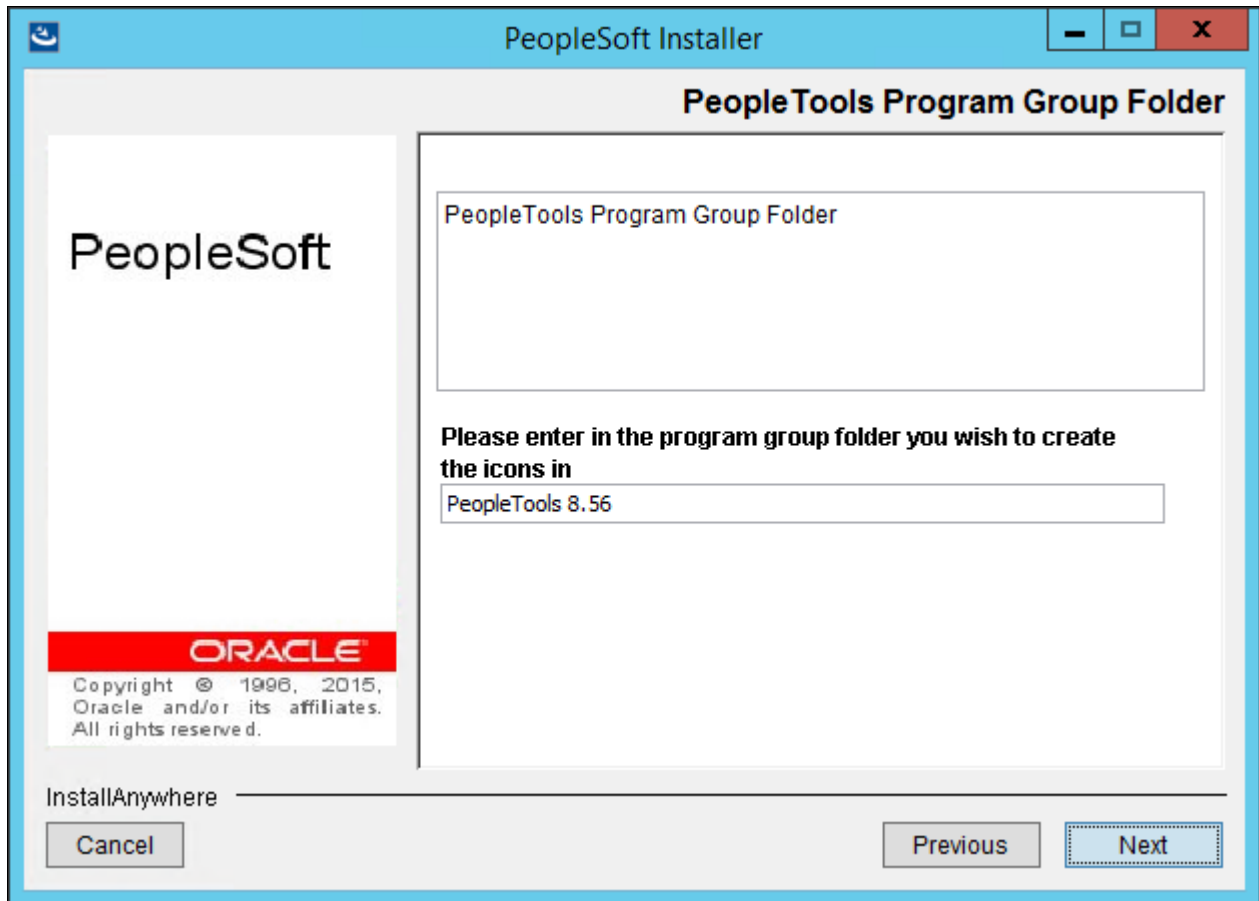


PeopleSoft Installer PeopleTools Program Group Folder window

9. Enter the configuration information for Environment Management, the Environment Management machine name and port number.

Select the machine name of the web server running the Environment Manager Hub. (This will very likely be the machine on which you run the PeopleSoft Pure Internet Architecture). Select the hub port number (the default is 80, as shown in the example). This needs to match the PeopleSoft Pure Internet Architecture port. If you change the port number for the PeopleSoft Pure Internet Architecture configuration, you must also change the web server listener port number for all the agents in the configuration.properties file.


See the information on configuring and running Environment Management Components in the *PeopleTools: Change Assistant and Update Manager* product documentation.

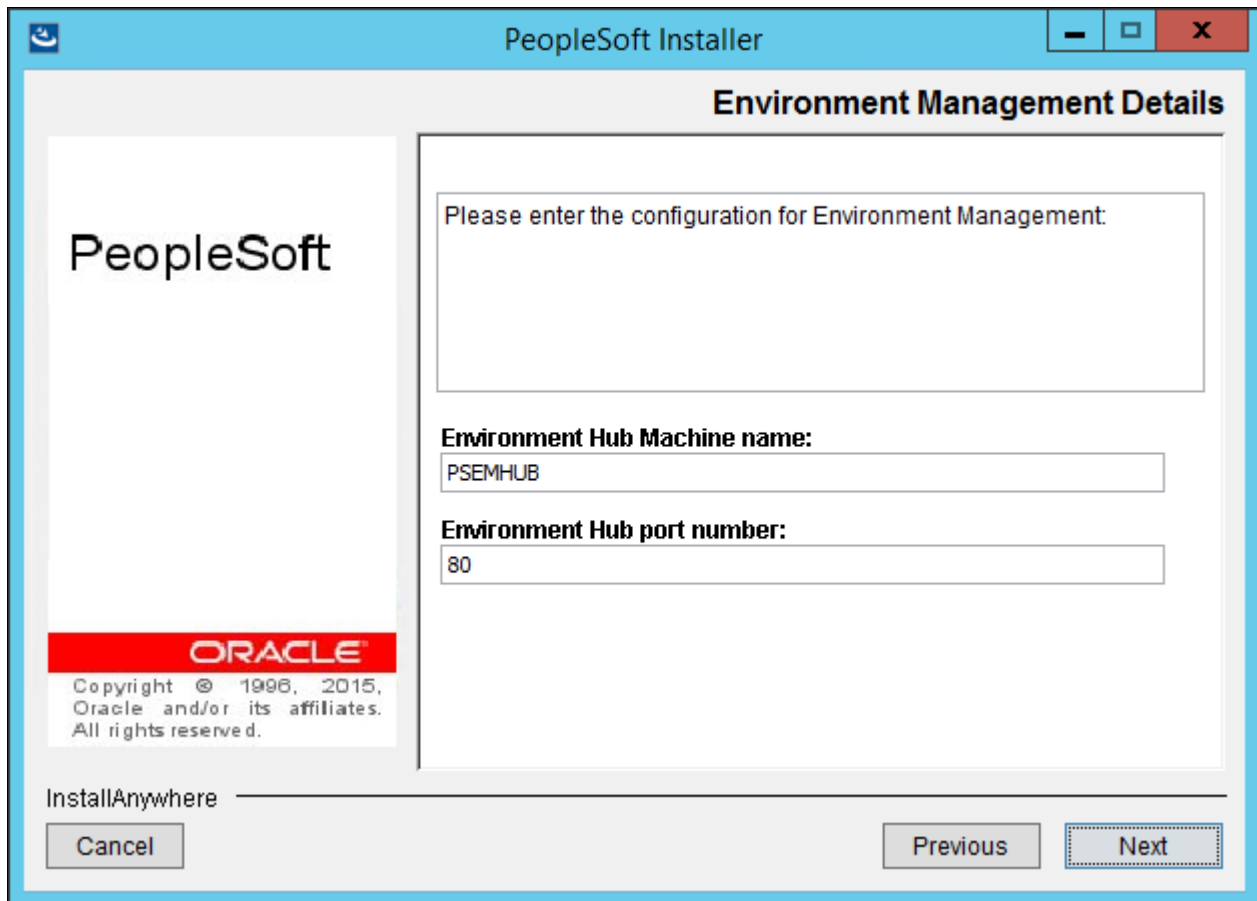

The screenshot shows a window titled "PeopleSoft Installer" with a subtitle "Environment Management Details". On the left, there is a "PeopleSoft" logo and an "ORACLE" logo with copyright information: "Copyright © 1996, 2015, Oracle and/or its affiliates. All rights reserved." Below this is the text "InstallAnywhere". The main area contains a text box with the instruction "Please enter the configuration for Environment Management:". Below this are two input fields: "Environment Hub Machine name:" with the value "PSEMHUB" and "Environment Hub port number:" with the value "80". At the bottom, there are three buttons: "Cancel", "Previous", and "Next". The "Next" button is highlighted with a dashed border.

PeopleSoft Installer Environment Management Details window

10. The next screen lists the PeopleSoft PeopleTools components (product features). Accept the defaults for the PeopleSoft PeopleTools features and click Next.

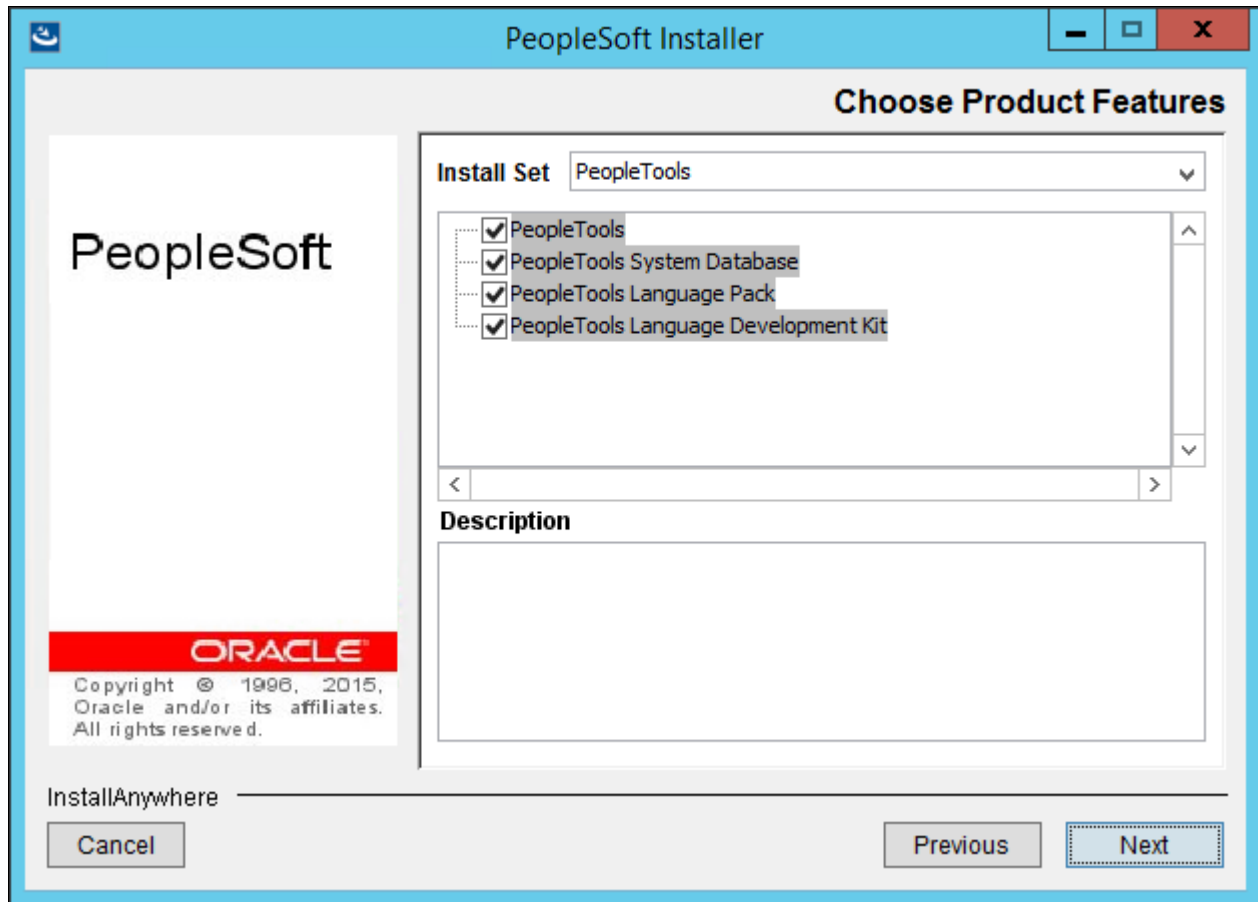

PeopleSoft Installer Choose Product Features window

- Select *PeopleTools* to install PeopleSoft PeopleTools and the PeopleSoft Pure Internet Architecture. This component contains the core PeopleTools files and is required for the proper operation of the PeopleSoft system and the PeopleSoft Pure Internet Architecture.
- The *PeopleTools Language Pack* and *PeopleTools Language Development Kit* contain the translated PeopleSoft PeopleTools DLLs and the resource files and headers needed to build them.

---

**Note.** These options are available only for installations on Windows.


---

Select *PeopleTools Language Pack* if you plan on running the Windows components of the installation in languages other than English. This component contains the compiled PeopleSoft translations for the Windows client. If you are not using multiple languages throughout your implementation, you do not need this component.

Select *PeopleTools Language Development Kit* if you plan on modifying or creating your own new translations for the PeopleSoft PeopleTools Windows client components. It contains the source and header files required to modify and compile new versions of these translations. Again, you do not need this component if you are not using multiple languages.

11. You will see an installation confirmation window. If the information is correct, choose Next. If you need to modify any of the information, choose the Back button and make your changes.

The summary information includes the installation directory, the features, and the PeopleSoft servers:

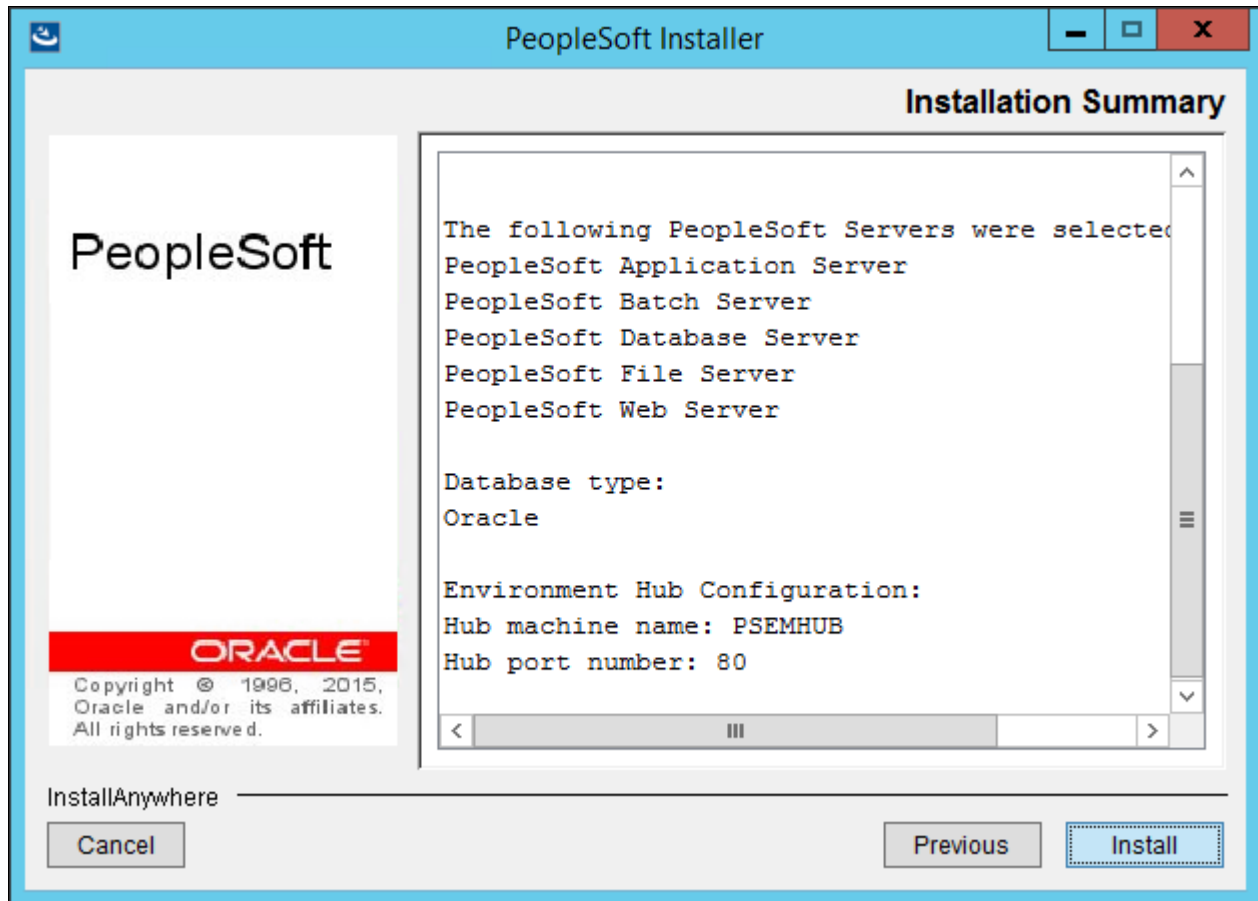


PeopleSoft Installer Installation Summary window



12. After the files have been installed, click *Done* to complete the setup.

The window displays the installation directory, which is C:\PT8.56 in this example.

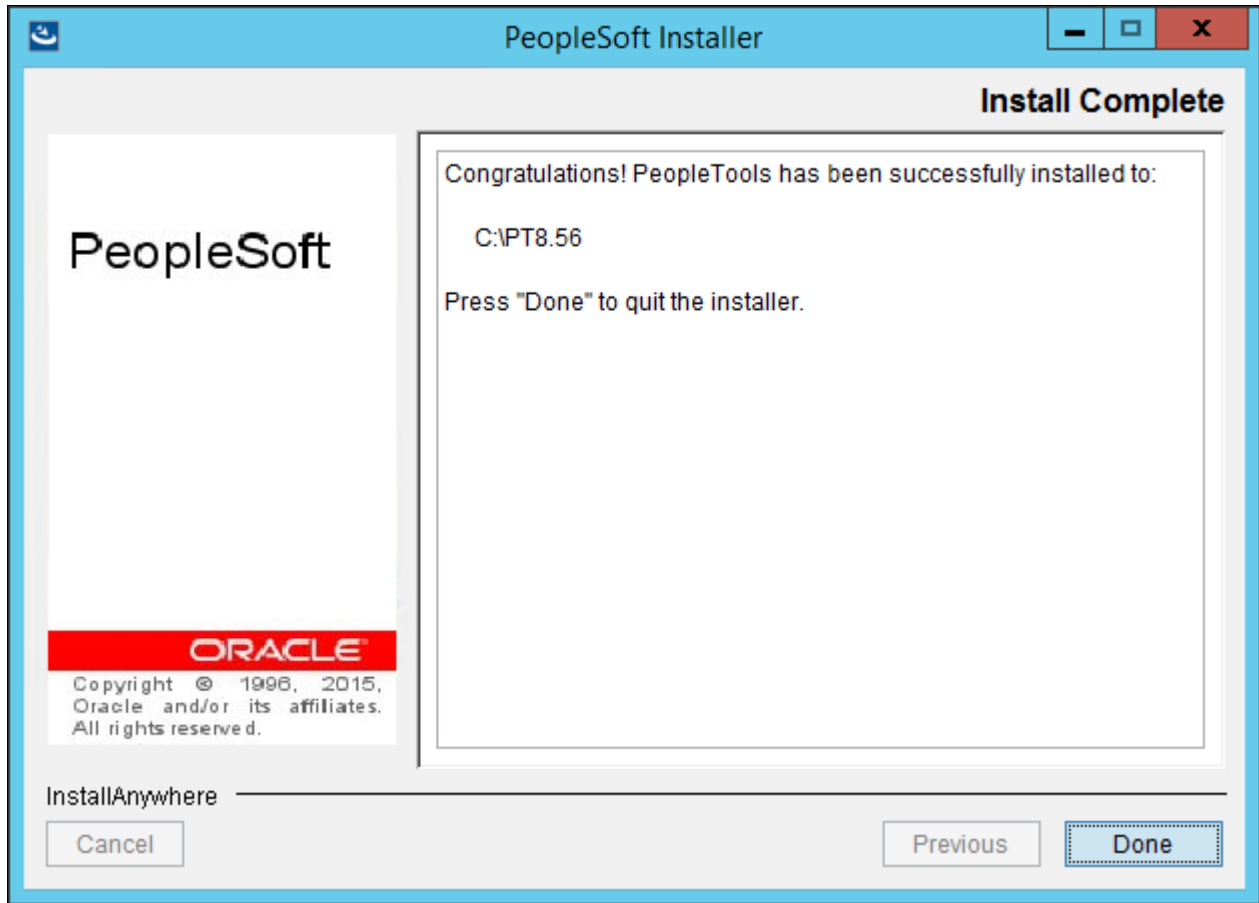

PeopleSoft Installer Install Complete window

### Task 4-2-3: Installing PeopleSoft PeopleTools in Console Mode

To install PeopleSoft PeopleTools with the PeopleSoft Installer in console mode:

**Note.** The console mode installation is typically used on UNIX and Linux platforms, but can also be used on Microsoft Windows.

1. Launch the PeopleSoft Installer in console mode. For example:

On Unix and Linux

```
PS_INSTALL/disk1/setup.sh -i console -tempdir /tmp
```

On Microsoft Windows

```
PS_INSTALL/disk1/setup.bat -i console
```

See Starting the PeopleSoft Installer.

2. At the Welcome prompt, press ENTER to continue.

=====>  
=====

Welcome  
-----

InstallAnywhere will guide you through the installation of PeopleTools 8.56.

PRESS <ENTER> TO CONTINUE:

3. Accept the license agreement by entering *Y*. Select 0 when you are finished.

Portions of the agreement text have been omitted from this example for brevity.

```
=====→
=====
License Agreement
-----
```

Installation and Use of PeopleTools Requires Acceptance of the Following License Agreement:

English

Notice: This installation program may install products above and beyond those that you have licensed. Please refer to your master license agreement for the products you are entitled to use. Installing and/or using software that you have not specifically licensed may result in termination of your license agreement with PeopleSoft and entitle PeopleSoft to receive damages. It may also be an infringement of PeopleSoft's intellectual property rights.

DO YOU ACCEPT THE TERMS OF THIS LICENSE AGREEMENT? (Y/N): **y**

4. Enter *1* to select a Unicode Database (Recommended), or *2* to select a non-Unicode database, and then 0 to continue.

---

**Note.** Unicode databases are beneficial if you intend to deploy your applications globally. Some languages in a PeopleSoft installation are only supported in a Unicode database. Unicode databases can require more disk space than non-Unicode databases.

---

See *PeopleTools: Global Technology*.

Please select the Oracle database character set:

```
->1- Unicode Database (Recommended)
    2- Non-Unicode Database
```

To select an item enter its number, or 0 when you are finished [0] :

5. Select the PeopleSoft servers you want to install.

For DB2 for LUW please select the products to install:

- >1- PeopleSoft Application Server
- >2- PeopleSoft Batch Server
- >3- PeopleSoft Database Server
- >4- PeopleSoft File Server
- >5- PeopleSoft Web Server

To select an item enter its number, or 0 when you are finished [0] :

By default, all of the servers supported for your database platform are selected.

---

**Note.** If you are installing on UNIX, do not use Symbolic Links. Use the actual directory.

---

6. Enter the installation location, such as /home/pt856, referred to as *PS\_HOME*, and press ENTER to continue.
- 

**Note.** In console mode, the browse option for specifying a different install directory is unavailable.

---

Please enter an installation location or press <ENTER> to accept the⇒  
 default  
 (Default: C:\PT8.56):

7. *Microsoft Windows only:* Specify the database connectivity directory.

Please select the location of Connectivity Program Directory [c:⇒  
 \Program Files\ibm\SQLLIB\BIN]  
 :

The default location for the connectivity software for DB2/LUW (as set by the vendor) is: C:\Program Files\ibm\SQLLIB\BIN.

If the database connectivity software was installed to a different directory, enter that path instead.

8. *Microsoft Windows only:* Indicate whether you want icons to be created.

Do you want to Install PeopleTools Icons?

- >1- Yes
- 2- No

To select an item enter its number, or 0 when you are finished [0] :

9. If you select the option to create PeopleTools icons, enter the name for the program group.

The default is PeopleTools 8.56.

Please enter in the program group folder you wish to create the icons⇒  
 in  
 [PeopleTools 8.56]:

10. Enter the configuration for Environment Management. Select the machine name and port number.

Please enter the hub machine name: [PSEMHUB]:

Please enter the hub port number: [80]:

Select the machine name of the web server running the Environment Manager Hub. (This will very likely be the machine on which you run the PeopleSoft Pure Internet Architecture). Select the hub port number (the default is 80). This needs to match the PeopleSoft Pure Internet Architecture port. If you change the port number for the PeopleSoft Pure Internet Architecture configuration, you must also change the web server

listener port number for all the agents in the configuration.properties file.

See the information on configuring and running Environment Management components in the *PeopleTools: Change Assistant and Update Manager* product documentation.

#### 11. Choose the features that you wish to install:

To select/deselect a feature or to view its children, type its number

```
-> 1-  PeopleTools
    2-  PeopleTools System Database
    3-  PeopleTools Language Pack
    4-  PeopleTools Language Development Kit
```

Options 3 and 4 appear only on Microsoft Windows.

#### 12. At this point, you can toggle the install status of each product. Press 0 and then ENTER to continue and the PeopleSoft Installer will give you a summary of your selection. This summary will depend on your earlier selections.

Pre-Install Summary

Please review the following before continuing:

PeopleTools will be installed in the following location: /home/PT856

with the following features:

```
PeopleTools
PeopleTools System Database
```

The following PeopleSoft Servers were selected by you:

```
PeopleSoft Application Server
PeopleSoft Batch Server
PeopleSoft Database Server
PeopleSoft File Server
PeopleSoft Web Server
```

Database Type:

```
DB2 for LUW
```

Environment Hub Configuration:

```
Hub machine name: PSEMHUB
Hub port number: 80
```

Press 1 for Next, 2 for Previous, 3 to Cancel, or 5 to Redisplay [1]

#### 13. Press ENTER to start the installation.

The PeopleSoft Installer displays a text-based progress bar to indicate the progress of the installation.

#### 14. Press ENTER to exit.

---

**Note.** For UNIX operating systems, if you chose PeopleSoft servers that require a JRE, you see the "Unpacking JRE" message after the progress bar.

---

Installation Complete

-----

Congratulations. PeopleTools has been successfully installed to:

```
/home/PT856
```

PRESS <ENTER> TO EXIT THE INSTALLER:

15. If you are installing on AIX, go to the *PS\_HOME*/jre directory and ensure that the directory has executable permissions. If not, set the permission using a command such as `chmod +x`.

## **Task 4-3: Verifying Necessary Files for Installation on Windows**

---

The current PeopleSoft PeopleTools release was developed using Microsoft Visual Studio 2015. PeopleSoft PeopleTools programs require Microsoft Visual C++ Redistributable for Visual Studio 2015 files to be present or the programs will not run.

During your PeopleSoft PeopleTools installation, the install programs will automatically update the Microsoft Windows machine performing the installation.

The required Visual C++ Redistributable for Visual Studio 2015 packages are installed by all of the PeopleSoft installers, including:

- PeopleSoft PeopleTools
- PeopleTools Client
- Database Configuration Wizard (DCW)
- PeopleSoft Pure Internet Architecture
- Change Assistant
- Change Impact Analyzer
- Web Application Deployment tool

In some cases it may be necessary for you to carry out a separate installation of the Visual C++ Redistributable for Visual Studio 2015 packages. For example:

- If the update does not take place during the installation program run, you may not be able to launch PeopleSoft PeopleTools client or server executables on that machine and may receive error messages.
- If you are accessing PeopleSoft PeopleTools executables from a machine on which the PeopleSoft installer did not run, the executables may not work and you may receive error messages.

If you encounter these errors, you can update the Microsoft Windows machine's Visual C++ Redistributable for Visual Studio 2015 packages by running the installers manually.

If installing on a server or PeopleTools Client environment:

1. Go to *PS\_HOME*\setup\psvcrt.
2. Run `vcredist_x64.exe`.

---

**Note.** For each installer, the installation is completed automatically.

---

## Task 4-4: Installing PeopleSoft Application Software

---

After installing PeopleSoft PeopleTools, install the PeopleSoft application software to the same *PS\_HOME* directory, or to *PS\_APP\_HOME*. The installation windows may look slightly different depending upon which application you install.

See "Preparing for Installation," Defining Installation Locations.

To install the PeopleSoft application, launch the PeopleSoft Installer from *PS\_INSTALL/disk1* and follow the procedure in Running the PeopleSoft Installer.

Use the following guidelines when installing:

- If supported by the PeopleSoft Application that you are installing, you can install the PeopleSoft Application software to a *PS\_APP\_HOME* location that is not the same as the *PS\_HOME* location where you installed PeopleSoft PeopleTools. Be sure to review the installation guide for your PeopleSoft Application to determine whether this functionality is supported.
- If you are installing more than one application, it is a good idea to create an application-specific *PS\_HOME* or *PS\_APP\_HOME* and carry out an installation of PeopleSoft PeopleTools for each application. This helps you to maintain your applications more efficiently, since you can easily match each application version to the correct version of PeopleSoft PeopleTools.
- The installation includes all products for your PeopleSoft application and both System Database and Demo Database files.

See "Setting Up the PeopleSoft Pure Internet Architecture in GUI Mode," Completing Post-Installation Steps.

See "Setting Up the PeopleSoft Pure Internet Architecture in Console Mode," Completing Post-Installation Steps.

## Task 4-5: Installing the PeopleTools Client Files

---

This section discusses:

- Installing the PeopleTools Client Files Using the PeopleSoft Installer
- Installing the PeopleTools Client Files in Silent Mode

### Task 4-5-1: Installing the PeopleTools Client Files Using the PeopleSoft Installer

To install the files needed for the PeopleTools Client, you must first install PeopleSoft PeopleTools. After you install PeopleSoft PeopleTools, launch the PeopleSoft Installer from *PS\_HOME\setup\Client\Disk1* and follow the procedure in the section Running the PeopleSoft Installer. Note that the PeopleTools Client installation does not include the Environment Management Setup window.

---

**Note.** If you installed PeopleSoft PeopleTools on a UNIX or Linux computer, you can copy the directory *PS\_HOME\setup\Client\* to a Microsoft Windows machine to install the client.

---

## Task 4-5-2: Installing the PeopleTools Client Files in Silent Mode

This section discusses:

- Editing the Response File
- Running the Silent Mode Installation for the PeopleTools Client

### Editing the Response File

You can carry out a silent installation of the PeopleTools client files by providing all the required settings in a response file. With silent installation there is no user interaction after the installation begins.

You need a response file to start the installer in silent mode. After installing PeopleSoft PeopleTools you can find a response file template (`resp_file_client.txt`) in the directory `PS_HOME\setup\Client\Disk1`. Modify the values in the response file according to your installation requirements. Use the information in the section *Running the PeopleSoft installer for guidance in editing the file.*

For example, to specify `D:/PT8.56_Client` as the installation directory, edit the file to include this line:

```
USER_INSTALL_DIR=D:/PT8.56_Client
```

---

**Note.** Use a forward slash ("/") to specify the directory.

---

*Sample response file:*

```
# Response file for Client Installation

# Notes:
# 1. Use "/" forward slash in the path (unix style), (for ex, D:/PT8.53-803-R1-client)
# 2. Replace _DESTDIR_ below with the destination directory path.
# 3. Invoke silent install as "<cddir>\disk1\setup.bat -i silent -DRES_>
FILE_PATH=<path_to_response_file>".

# the install directory for (for ex, D:/PT8.53-803-R1-client)
USER_INSTALL_DIR=_DESTDIR_

# Possible values for database type are "ORA","DBX","MSS","DB2"
DB_TYPE=ORA

# "0" for non-unicode db and "1" for unicode db
# Applies to daatabase types "ORA","DBX","MSS","DB2"
UNICODE_DB=1

# install shortcuts for Client components in start > programs , allowed=>
values- "0" not to create shortcut, "1" to create shortcut.
USER_INPUT_RESULT_0=0

# if you set USER_INPUT_RESULT_0 to 1 (above) then Name your shortcut like=>
the way you want to see in Start>programs (default is PeopleTools Client=>
8.55)
USER_INPUT_RESULT_14=PeopleTools Client 8.56
```

## Running the Silent Mode Installation for the PeopleTools Client

Use the response file that you modified for your configuration. Substitute the location where you saved the response file for `<path_to_response_file>` in the following procedures:

To install the PeopleTools client files in silent mode:

1. In a command prompt, go to `PS_HOME\setup\Client\Disk1`.
2. Run the following command:

```
setup.bat -i silent -DRES_FILE_PATH=<path_to_response_file>
```

## Task 4-6: Mapping a Drive on the Install Workstation

If you need to install to the file server or PeopleTools Client from a networked install workstation, map a drive letter to the top-level PeopleSoft directory (`PS_HOME`) from the install workstation. The `PS_HOME` directory must be shared, and you must have write permission from the install workstation to the file server or PeopleSoft Client.

From the install workstation, create a logical drive that points to the `PS_HOME` directory.

On a Windows network, use Windows Explorer to map to the drive on the file server or PeopleTools Client to which you are installing; or use the NET USE command, for example:

```
NET USE N: \\SERVER1\PS_HOME
```

On a Novell network, use the MAP command:

```
MAP ROOT N:=SERVER1/SYS:PS_HOME
```

In this example, `SERVER1` is the name of the file server or PeopleTools Client.

### See Also

"Setting Up the Install Workstation"



## Chapter 5

# Setting Up the Install Workstation

This chapter discusses:

- Understanding the Install Workstation
- Prerequisites
- Starting Configuration Manager
- Setting Startup Options
- Editing the Default Profile
- Running Client Setup

## Understanding the Install Workstation

---

This chapter describes how to set up a PeopleSoft Windows-based client for connecting to the database server in two-tier mode, specifically for the purpose of performing install-related tasks from the workstation. You must configure at least one two-tier Windows-based client for running the Data Mover and SQR processes required for setting up the batch server and for creating the PeopleSoft database. For some installations you may wish to set up multiple install workstations, so that you can perform asynchronous tasks at the same time; for example, you could create and populate multiple databases simultaneously. You can quickly configure multiple workstations by exporting a configuration file from one workstation and importing it to another workstation.

### See Also

*PeopleTools: System and Server Administration*

## Prerequisites

---

The following tasks are prerequisites for setting up the install workstation:

- The workstation must have database connectivity software installed.
- You must have planned your database creation strategy. You should know the precise names of the databases that you intend to create.
- Make sure that you have created your connect strategy. You must use a Connect ID. You should know both the Connect ID and Connect password.

For information on PeopleSoft Connect ID and Connect password, consult the *PeopleTools: System and Server Administration* product documentation for information on setting Application Server domain parameters.

- The workstation must have a logical drive mapped to *PS\_HOME* on the file server (or, if the file server and

install workstation are one and the same, *PS\_HOME* can be installed on a local drive).

- The person performing the installation must have read access to the *PS\_HOME* directory.

If this is the same workstation on which the PeopleSoft PeopleTools installation was performed, it should have a PeopleTools 8.5 installation program group, which was created when you loaded the PeopleTools software. This isn't a requirement, but it does make it more convenient to run the PeopleTools install applications.

## See Also

"Preparing for Installation"

"Using the PeopleSoft Installer"

## Task 5-1: Starting Configuration Manager

---

Configuration Manager is a utility for configuring workstations being used as the PeopleTools Development Environment. These are its principal functions:

- Sets up and make changes to PeopleSoft configuration settings.
- Creates a program group containing Microsoft Windows shortcuts to PeopleSoft applications.
- Installs local DLLs.

The first time you run Configuration Manager on the client, it will populate certain fields with default values specified in a configuration file stored on the file server, specifically: *PS\_HOME\setup\pstools.cfg*. This configuration file was set up when you ran the installation. Once you set up and run Configuration Manager, it will populate fields using values that are stored in the Windows system registry.

To start Configuration Manager, do one of the following:

- On Microsoft Windows 7, select *Start, Programs, PeopleTools 8.56, Configuration Manager*. (This program group will be available if you installed PeopleSoft PeopleTools on this workstation.)
- On Microsoft Windows 8 or 2012 R2, access the Apps screen, navigate to the PeopleTools 8.56 category, and select Configuration Manager.

---

**Note.** See the documentation for your operating system for information on accessing the Apps screen.

---

- If the *PeopleTools 8.56* program group was not installed on this workstation, run *pscfg.exe* directly from the *PS\_HOME\bin\client\winx86* directory on the file server.

## Task 5-2: Setting Startup Options

---

The Startup tab of Configuration Manager sets the default options for the PeopleSoft sign-on screen that is used for connecting to a PeopleSoft database. It also contains a setting that specifies the local directory for storing cached PeopleSoft data.

To set Startup options:

1. Confirm that you are viewing the Configuration Manager Startup tab (this tab is what you see if you started Configuration Manager as described in the previous task).
2. Set the following options:
  - *Database type* — Verify the type of RDBMS. This should already be set to DB2 UDB for UNIX, NT.

- *Application Server Name* — This option appears if you select a database type of Application Server. It is where you enter your application server name if you are setting up a three-tier connection.
- *Database name* — The name of the default database to connect to. Enter the name of one of the databases that you intend to create.
- *User ID* — The name of the default user that will appear in the sign-on screen. This can be any valid user name, although for installation setup it normally matches the name of one of the built-in PeopleSoft users (typically PS or VP1) that will be installed in the database.
- *Connect ID and Connect Password* — Type your connect ID and password into these fields.

## **Task 5-3: Editing the Default Profile**

---

Begin by editing the default profile for the workstation. Among other things, this will verify that the paths to *PS\_HOME* and its subdirectories are correctly set, which is required for subsequent tasks.

For more information on using Configuration Manager, see the *PeopleTools: System and Server Administration* product documentation for configuring user profiles.

To edit the default profile:

1. Select the Profile tab in Configuration Manager.  
Only one profile, the Default Profile, has been defined.
2. Select Edit to display the Edit Profile dialog box, and then select the Process Scheduler tab.

3. In the Process Scheduler tab verify the options listed below the example. These should have been set correctly by the PeopleSoft installation program.

The screenshot shows the 'Edit Profile - Default' dialog box with the 'Process Scheduler' tab selected. The dialog is divided into several sections:

- General:**
  - PeopleSoft Home Directory (PS\_HOME): C:\PT8.56\
  - PeopleSoft App Home Directory (PS\_APP\_HOME): C:\app\_home\
  - PeopleSoft Customizations Home Directory (PS\_CUST\_HOME): C:\PT8.56\
  - Temp Directory (TEMP): c:\temp
  - Crystal Reports (CRWRPTPATH): C:\PT8.56\crw
  - Database Drivers (DBBIN): C:\sqlib\bin
  - Output Directory (OUTPUT): c:\temp\
  - Word Executables Directory (WINWORD):
  - Log Directory (LOG): c:\temp
  - Redirect Output
- Application Engine:**
  - Debug
  - Disable Restart
- SQR:**
  - SQR Executables (SQRBIN): C:\PT8.56\bin\sqr\DBX\binw
  - PSSQR Path: C:\PT8.56\sqr
  - SQR Flags (PSSQRFLAGS): -ZIFC:\PT8.56\sqr\pssqr.ini
- COBOL:**
  - COBOL Executables (CBLBIN): \PT8.56\cblbin%PS\_COBOLTYPE

At the bottom of the dialog are buttons for 'OK', 'Cancel', and 'Apply'.


Edit Profile dialog box: Process Scheduler tab

- Verify that the PeopleSoft Home Directory (PS\_HOME) field is set to the path to *PS\_HOME* on the file server.
- Verify that the PeopleSoft Apps Home Directory (PS\_APP\_HOME) field is set to the path to *PS\_APP\_HOME* on the file server, C:\app\_home in this example.
- On Microsoft Windows operating systems, set the Database Drivers (DBBIN) field to the path for the database connectivity files, if necessary.

The example shows the default for DB2/LUW, C:\sqlib\bin.

- Set the SQR Executables (SQRBIN) field to the file server directory where SQR for Windows was installed when you ran the PeopleSoft Installer.
- Set the SQR Flags (PSSQRFLAGS) field to *-ZIF<PS\_HOME>\sqr\pssqr.ini*.
- Set the SQR Report Search 1 (PSSQR1) field to *PS\_HOME\sqr*. The remaining SQR Report Search fields can be left blank, because no additional SQR report directories have been created yet.

4. Select the Common tab of the Edit Profile dialog box, shown in this example:

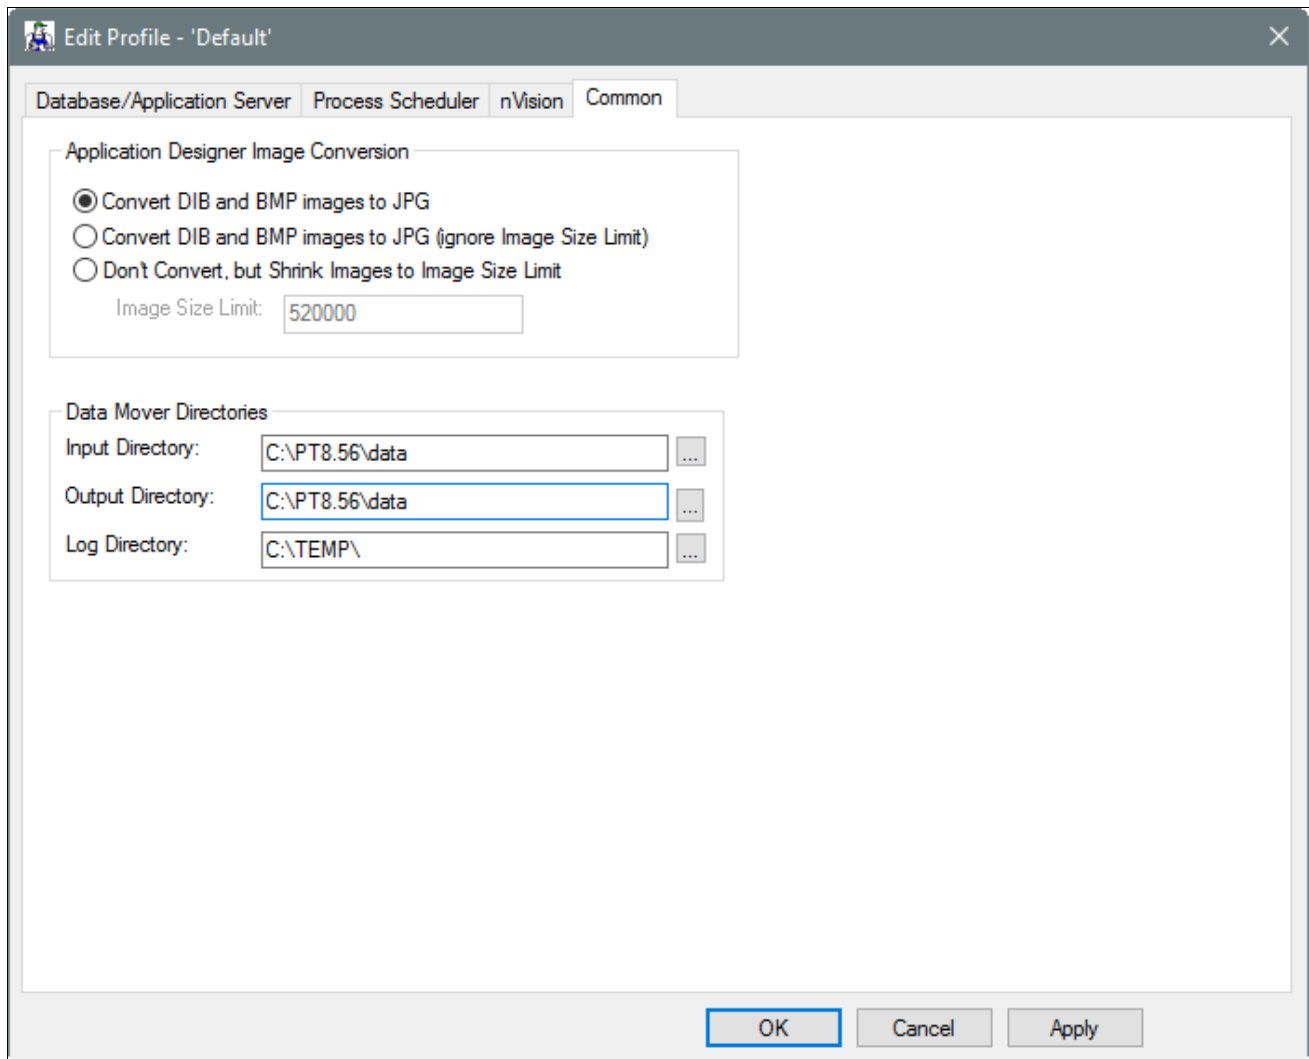

Edit Profile dialog box: Common tab

The following fields on the Common tab are used to set Data Mover default input, output, and log directories.

- Verify that the Input Directory and Output Directory fields are set to *PS\_HOME\data*. This directory will store the Data Mover scripts required to populate the PeopleSoft database.
- Set the Log Directory to a local workstation directory to store the Data Mover log files. The default is *C:\TEMP*.

Data Mover will not create a new directory under *PS\_APP\_HOME* or *PS\_HOME* for log files. If you want Data Mover to write log files into *PS\_APP\_HOME*, you must create a new directory named log under *PS\_APP\_HOME*.

5. Select OK to close the Edit Profile dialog box.

## Task 5-4: Running Client Setup

The Client Setup tab does the following:

- Installs a PeopleSoft program group on the workstation.

- Installs system DLLs on the workstation.

These Client Setup functions are performed when you click OK or Apply from Configuration Manager only if the Install Workstation option on the Client Setup tab is selected.

---

**Note.** Any files installed by Client Setup on the workstation from the file server use the paths specified in the default profile.

---

To run Client Setup:

1. Select the Client Setup tab in Configuration Manager.
2. In the Group Title text box enter the name of the program group for the icons you want on the client workstation. (A program group name cannot contain any of the following characters: \ / : \* ? " < > |)  
You can call the program group anything you want, but this documentation uses *PeopleTools 8.56*.
3. If you do not have a PeopleTools 8.56 program group set up on the workstation, be sure to check the following two options for installing shortcuts to applications essential for installation.

---

**Note.** When you run Client Setup, it will uninstall any existing shortcuts in the PeopleTools 8.56 program group, and install shortcuts for the applications you have selected. If you subsequently want to install or uninstall shortcuts, you can always re-run Client Setup.

---

- *Data Mover*
  - *Configuration Manager*
4. Select the option Install Workstation.  
This check box determines whether Client Setup runs when you click Apply or OK in Configuration Manager. If this option is not selected, Client Setup will create or update settings in the registry, but it will not set up the PeopleTools 8.56 program group or install local DLLs.
  5. Click OK to run Client Setup and close Configuration Manager.

## Chapter 6A

# Creating a Database Manually on Microsoft Windows or UNIX

This chapter discusses:

- Understanding Database Creation
- Determining Tablespace Strategy for Demo Database
- Editing SQL Scripts
- Running SQL Scripts
- Configuring and Testing Database Connectivity for DB2 Connect or DB2 Client V9.x or Earlier
- Configuring and Testing Connectivity for DB2 Connect and DB2 Client V10.x or Later
- Configuring an ODBC Data Source for Connectivity on Microsoft Windows
- Creating Data Mover Import Scripts
- Running Data Mover Import Scripts
- Checking the Log Files and Troubleshooting
- Changing the Base Language

## Understanding Database Creation

---

This section describes the tasks required to create a PeopleSoft product database. During a standard PeopleSoft installation you will execute these tasks to create two distinct types of databases.

- *System:* The System (SYS) database has no company specific data, and can be used to load your data and begin development of your production database.
- *Demo:* The Demo (DMO) database contains data for a sample company, and can be used immediately for demonstration, for testing, and as a development reference.

The requirements for these databases vary, so not all of this section's tasks apply to each database. The instructions will note any distinctions between creating a Demo and a System database.

- You must have installed the Database component of your PeopleSoft application installation software to your database server.
- You must have the PeopleTools Development Environment set up to create your database.

---

**Important!** Do not forget that application-specific installation steps are provided in a separate document specific to the application. For instance, if you are performing PeopleSoft CRM installation, you need both this documentation for the basic installation of PeopleSoft PeopleTools and the PeopleSoft application, and any additional instructions provided by CRM. Search in My Oracle Support for the installation documentation specific to your application.

---

---

**Note.** For the sake of brevity, this documentation sometimes refers to DB2 for Linux, UNIX, and Windows as *DB2/LUW*.

---

**Note.** The Database Configuration Wizard cannot be used on a Microsoft Windows operating system. You must use the manual method of creating a database for this configuration.

---

After you complete the tasks in this chapter, read the chapter "Completing the Database Setup." Depending upon your environment, you may not need to carry out every task in that chapter. However it is important that you evaluate the requirements and perform the necessary tasks.

## See Also

"Preparing for Installation," Planning Database Creation

"Setting Up the Install Workstation"

---

## Task 6A-1: Determining Tablespace Strategy for Demo Database

---

The default installation for PeopleSoft databases uses separate tablespaces for *Data* and *Index* storage. Due to the separation of Index tablespaces, the only available tablespace choice for PeopleSoft databases is DMS.

For multiple tablespaces, the PeopleSoft installation provides a tablespace strategy for demonstration and system databases aimed at identifying high-growth and high-update tables. This limits the number of tables the DBA must monitor and analyze, and simplifies capacity planning and database tuning activities. The standard tablespace names that Oracle delivers for the PeopleSoft installation categorize tables as follows:

- High growth and high update tables are grouped together into tablespaces named *XXLARGE*, where *XX* is a PeopleSoft application identifier. It's expected that each table defined in *XXLARGE* will be placed in its own tablespace for system testing or production for performance and recovery reasons.
- Relatively stable tables are grouped into tablespaces named *XXAPP*, where *XX* is a PeopleSoft application identifier. These tables may be placed in shared tablespaces defined with a moderate freespace specification.
- Tables containing rows exceeding 4K in width and/or containing LOB data types are assigned in the *PSIMAGE* or *PSIMAGE2* tablespace.

---

## Task 6A-2: Editing SQL Scripts

---

This section discusses:

- Understanding SQL Scripts
- Editing *CREATEDB-95.SQL* or *CREATEDBU.SQL*
- Executing *DB2SET* Command to Set Proper Decimal Scale
- Editing *ALTRDB.SQL*
- Editing *CREATEBPU.SQL* for Unicode
- Editing *XXDDLMS.SQL* or *XXDDLMSU.SQL*
- Editing *DBOWNER.SQL*
- Editing *PSADMIN.SQL*



## Understanding SQL Scripts

Before creating the PeopleSoft database, you need to modify these SQL scripts in the *PS\_HOME/scripts* (UNIX) or *PS\_HOME\scripts* (Microsoft Windows) directory.

- DBMCFG.SQL
- CREATEDB-95.SQL (non-Unicode)
- CREATEDBU.SQL (Unicode)
- ALTRDB.SQL
- CREATEBPU.SQL (Unicode)
- XXDDLMS.SQL, where *XX* is a two-character code corresponding to the product line you are installing
- XXDDLMSU.SQL (Unicode), where *XX* is a two-character code corresponding to the product line you are installing
- DBOWNER.SQL
- DBOWNERU.SQL (Unicode)
- PSADMIN.SQL

See Editing XXDDLMS.SQL or XXDDLMSU.SQL.

### Task 6A-2-1: Editing CREATEDB-95.SQL or CREATEDBU.SQL

Select the appropriate script for the database you are creating:

- Use CREATEDB-95.SQL for non-Unicode installations.
- Use CREATEDBU.SQL for Unicode installations.

Edit the CREATEDB-95.SQL or CREATEDBU.SQL script in *PS\_HOME/scripts* (UNIX) or *PS\_HOME\scripts* (Microsoft Windows) script, replacing the following items with your information.

Items to Edit	Appropriate Values
<db2-database-name>	This is usually the same name as the PeopleSoft database name.
<dir-name>	This is the DB2 UDB for Linux, UNIX, and Windows directory where the database and log files will reside. Optionally, you can specify another directory or device for logs using the NEWLOGPATH statement.  See "Creating a Database on UNIX," Changing the Location of the DB2/LUW Database Log Files.  <b>Note.</b> On Microsoft Windows, specify a drive letter. See the IBM documentation for more information.
<supplied-codeset>	Consult the DB2/LUW reference manual section on "Supported territory codes and code pages" for information on territory identifiers and code sets. This applies to the CREATEDB-95.SQL script only.

Items to Edit	Appropriate Values
<supplied-territory>	Consult the DB2/LUW reference manual section on "Supported territory codes and code pages" for information on territory identifiers and code sets. This applies to the CREATEDB-95.SQL script only.

Make note of the following:

- The database name must be in UPPERCASE and cannot exceed eight characters.
- Oracle recommends placing the data and log files in separate file systems and creating each file system on a different physical disk drive to reduce I/O contentions.
- The value assigned for database bufferpool size is the minimum for a PeopleSoft database. Consider increasing the size of the BUFFPAGE to improve performance. The total amount of BUFFPAGE memory allocated for all the databases running on the same computer should not exceed 75% of the computer memory.
- All the remaining configuration settings are the minimum recommendations to run PeopleSoft database. Do not change any settings to a lower value. To operate the database effectively, most of the database configuration parameters will have to be tuned for the end-user computing environment.

---

**Note.** For Unicode databases you need to set the db2 codepage for your db2 instance. To do this execute the command `db2set db2codepage=1208`

---

- The CREATEDB-95.SQL, or CREATEDBU.SQL script assumes that you are using circular logs for your demonstration database. For a production database, the archive logs are recommended.
- Statements near the end of the script examples define 16K Bufferpool (non-Unicode) and 32K Bufferpool (Unicode) to support LOB data types for PeopleSoft PeopleTools 8.53 and later.

The following are examples of these scripts:

---

**Note.** Starting with PeopleTools 8.49, the database configuration is done with a call to an inline defined Stored Procedure, `ps_db_cfg`. DO NOT change the Stored Procedure definition.

---

*CREATEDB-95.SQL, for non-Unicode:*

```
-- *****
-- This software and related documentation are provided under a
-- license agreement containing restrictions on use and
-- disclosure and are protected by intellectual property
-- laws. Except as expressly permitted in your license agreement
-- or allowed by law, you may not use, copy, reproduce,
-- translate, broadcast, modify, license, transmit, distribute,
-- exhibit, perform, publish or display any part, in any form or
-- by any means. Reverse engineering, disassembly, or
-- decompilation of this software, unless required by law for
-- interoperability, is prohibited.
-- The information contained herein is subject to change without
-- notice and is not warranted to be error-free. If you find any
-- errors, please report them to us in writing.
--
-- Copyright (C) 1988, 2012, Oracle and/or its affiliates.
-- All Rights Reserved.
-- *****
```

```

--
-- *****
-- *****
--
--
--
--
--          /pt_install/SCRIPTS/DBX/CREATEDB-95.SQL /main/pt84x⇒
/9 3
--
-- *****

-- After running this script do these steps to enable dbm and db updates
--   1. Stop the instance at the Unix prompt      $db2stop
--   2. Start the instance at the Unix prompt     $db2start
--
CREATE DATABASE <db2-database-name>
ON <dir-name>
USING CODESET <supplied-codeset> TERRITORY <supplied-territory>
COLLATE USING IDENTITY
USER TABLESPACE MANAGED BY SYSTEM USING ('data') EXTENTSIZE 8
TEMPORARY TABLESPACE MANAGED BY SYSTEM USING ('temp') EXTENTSIZE 8
;

CONNECT TO <db2-database-name> ;

CREATE PROCEDURE ps_db_cfg
(IN p_control CHAR(2)
,IN p_control_ver DEC(3,1)
,IN p_cfg_name VARCHAR(30)
,IN p_cfg_value VARCHAR(30)
,OUT p_out_msg VARCHAR(110)
,OUT p_out_dec DEC(3,1))

LANGUAGE SQL

SPECIFIC ps_db_cfg

BEGIN

  DECLARE v_CurrVer DECIMAL (3,1) ;--
  DECLARE v_CurrVer_Len,v_Cfg_Flag INT DEFAULT 0 ;--

  DECLARE v_Cfg_cmd VARCHAR(60) DEFAULT 'UPDATE DB CFG USING ' ;--

  SET p_out_msg = p_cfg_name || ' UNCHANGED';--

SET v_CurrVer_Len = (select length(substr(SERVICE_LEVEL,6,posstr(substr⇒
(SERVICE_LEVEL,6),'.')-1)) FROM TABLE(SYSPROC.ENV_GET_INST_INFO()) AS⇒
INSTANCEINFO) ;--

if v_CurrVer_Len > 1

```

```

then
SET v_CurrVer = (SELECT DEC(substr(SERVICE_LEVEL,6,4),3,1) FROM TABLE⇒
(SYSPROC.ENV_GET_INST_INFO()) AS INSTANCEINFO) ;--
SET p_out_dec = v_CurrVer ;--

else
SET v_CurrVer = (SELECT DEC(substr(SERVICE_LEVEL,6,3),3,1) FROM TABLE⇒
(SYSPROC.ENV_GET_INST_INFO()) AS INSTANCEINFO) ;--
SET p_out_dec = v_CurrVer ;--

End if ;--

CASE p_control

WHEN 'LT' THEN
  If v_CurrVer < p_control_ver THEN SET v_Cfg_Flag = 1 ;--
  End if ;--

WHEN 'LE' THEN
  If v_CurrVer <= p_control_ver THEN SET v_Cfg_Flag = 1 ;--
  End if ;--

WHEN 'EQ' THEN
  If v_CurrVer = p_control_ver THEN SET v_Cfg_Flag = 1 ;--
  End if ;--

WHEN 'GT' THEN
  If v_CurrVer > p_control_ver THEN SET v_Cfg_Flag = 1 ;--
  End if ;--

WHEN 'GE' THEN
  If v_CurrVer >= p_control_ver THEN SET v_Cfg_Flag = 1 ;--
  End if ;--

ELSE
  SET v_Cfg_Flag = 0 ;--

End CASE ;--

IF v_Cfg_Flag = 1 THEN

  SET p_out_msg = p_cfg_name || ' SET TO ' || p_cfg_value ;--

  SET v_Cfg_cmd = v_Cfg_cmd || p_cfg_name || ' ' || p_cfg_value ;--

  CALL ADMIN_CMD(v_Cfg_cmd) ;--

END IF ;--

END;

CALL ps_db_cfg('GE',9.5,'BUFFPAGE','15000',?,?) ;

```



```

USER TABLESPACE MANAGED BY SYSTEM USING
  ('data') EXTENTSIZE 8
TEMPORARY TABLESPACE MANAGED BY SYSTEM USING
  ('temp') EXTENTSIZE 8 ;

CONNECT TO <db2-database-name> ;

CREATE PROCEDURE ps_db_cfg
  (IN p_control CHAR(2)
  ,IN p_control_ver DEC(3,1)
  ,IN p_cfg_name VARCHAR(30)
  ,IN p_cfg_value VARCHAR(30)
  ,OUT p_out_msg VARCHAR(110)
  ,OUT p_out_dec DEC(3,1))

LANGUAGE SQL

SPECIFIC ps_db_cfg

BEGIN

  DECLARE v_CurrVer DECIMAL (3,1) ;--
  DECLARE v_CurrVer_Len,v_Cfg_Flag INT DEFAULT 0 ;--

  DECLARE v_Cfg_cmd VARCHAR(60) DEFAULT 'UPDATE DB CFG USING ' ;--

  SET p_out_msg = p_cfg_name || ' UNCHANGED';--

  SET v_CurrVer_Len = (select length(substr(SERVICE_LEVEL,6,posstr(substr⇒
  (SERVICE_LEVEL,6),'.')-1)) FROM TABLE(SYSPROC.ENV_GET_INST_INFO()) AS⇒
  INSTANCEINFO) ;--

  if v_CurrVer_Len > 1
  then
  SET v_CurrVer = (SELECT DEC(substr(SERVICE_LEVEL,6,4),3,1) FROM TABLE⇒
  (SYSPROC.ENV_GET_INST_INFO()) AS INSTANCEINFO) ;--
  SET p_out_dec = v_CurrVer ;--

  else
  SET v_CurrVer = (SELECT DEC(substr(SERVICE_LEVEL,6,3),3,1) FROM TABLE⇒
  (SYSPROC.ENV_GET_INST_INFO()) AS INSTANCEINFO) ;--
  SET p_out_dec = v_CurrVer ;--

  End if ;--

CASE p_control

  WHEN 'LT' THEN
    If v_CurrVer < p_control_ver THEN SET v_Cfg_Flag = 1 ;--
    End if ;--

  WHEN 'LE' THEN

```

```

    If v_CurrVer <= p_control_ver THEN SET v_Cfg_Flag = 1 ;--
    End if ;--

WHEN 'EQ' THEN
    If v_CurrVer = p_control_ver THEN SET v_Cfg_Flag = 1 ;--
    End if ;--

WHEN 'GT' THEN
    If v_CurrVer > p_control_ver THEN SET v_Cfg_Flag = 1 ;--
    End if ;--

WHEN 'GE' THEN
    If v_CurrVer >= p_control_ver THEN SET v_Cfg_Flag = 1 ;--
    End if ;--

ELSE
    SET v_Cfg_Flag = 0 ;--

End CASE ;--

IF v_Cfg_Flag = 1 THEN

    SET p_out_msg = p_cfg_name || ' SET TO ' || p_cfg_value ;--

    SET v_Cfg_cmd = v_Cfg_cmd || p_cfg_name || ' ' || p_cfg_value ;--

    CALL ADMIN_CMD(v_Cfg_cmd) ;--

END IF ;--

END;

CALL ps_db_cfg('GE',9.5,'BUFFPAGE','15000',?,?) ;
CALL ps_db_cfg('GE',9.5,'LOCKTIMEOUT','180',?,?) ;
CALL ps_db_cfg('GE',9.5,'LOGBUFSZ','24',?,?) ;
CALL ps_db_cfg('GE',9.5,'LOGFILSIZ','12000',?,?) ;
CALL ps_db_cfg('GE',9.5,'LOGPRIMARY','10',?,?) ;
CALL ps_db_cfg('GE',9.5,'LOGSECOND','20',?,?) ;
CALL ps_db_cfg('GE',9.5,'MAXAPPLS','150',?,?) ;
CALL ps_db_cfg('GE',9.5,'MIN_DEC_DIV_3','YES',?,?) ;

CREATE BUFFERPOOL PS32KPOOL SIZE -1 PAGESIZE 32K ;

CREATE TEMPORARY TABLESPACE TEMPSPACE32K PAGESIZE 32K MANAGED BY SYSTEM⇒
    USING ('temp32k') EXTENTSIZ 32 BUFFERPOOL PS32KPOOL ;

TERMINATE ;

```

## Task 6A-2-2: Executing DB2SET Command to Set Proper Decimal Scale

Execute db2set command:

```
db2set db2_min_dec_div_6=yes
```

### Task 6A-2-3: Editing ALTRDB.SQL

Edit the *PS\_HOME*/scripts/ALTRDB.SQL (UNIX) or *PS\_HOME*\scripts\ALTRDB.SQL (Microsoft Windows) directory, replacing <db2-database-name> with the PeopleSoft database name. ALTRDB.SQL enables the BUFFPAGE parameter set in CREATEDB-95.SQL or CREATEDBU.SQL by setting the Buffer Pool NPAGES to -1.

### Task 6A-2-4: Editing CREATEBPU.SQL for Unicode

Edit the *PS\_HOME*/scripts/CREATEBPU.SQL (UNIX) or *PS\_HOME*\scripts\CREATEBPU.SQL (Microsoft Windows) directory, replacing <db2-database-name> with the PeopleSoft database name. This script creates an 8K bufferpool.

### Task 6A-2-5: Editing XXDDLMS.SQL or XXDDLMSU.SQL

If you are creating a Unicode database, replace all references to *XXDDLMS.sql* below with *XXDDLMSU.sql*. Edit the *XXDDLMS.SQL* script, where *XX* is a two-character code corresponding to the product line. Use the following table to determine the code for the product line you are installing.

Code	Product Line
CS	PeopleSoft Campus Solutions
CR	PeopleSoft Customer Relationship Management
LM	PeopleSoft Enterprise Learning Management
PF	PeopleSoft Enterprise Performance Management
EP	PeopleSoft Financials / Supply Chain Management
EA	PeopleSoft Financials / Supply Chain Management Argentina
EB	PeopleSoft Financials / Supply Chain Management Brazil
HC	PeopleSoft Human Capital Management
PA	PeopleSoft Portal Solutions

**Note.** This is a complete list of available product lines for the current PeopleSoft PeopleTools release. Note that not all products go out on all PeopleSoft PeopleTools releases, so you may not see a script corresponding to every product line. In addition, some bolt-on products reference their own scripts within their application installation documentation. Please see your application-specific installation documentation for details.



The `XXDDLMS.SQL` script configures DMS tablespaces (DATABASE MANAGED SPACE) and is run against the SYS and DMO database. For a discussion of DMS tablespace management, search for the tuning and administration documentation on My Oracle Support.

Each of these scripts is in `PS_HOME/scripts` (UNIX) on the database server or `PS_HOME\scripts` (Microsoft Windows) directory on the file server. Edit the scripts to change the containers, using your site-specific values. The container path names in the delivered script are samples; any path name may be used.

We recommend that each container (`data1`, `data2`, `data3`, and so forth) reside on a separate physical hard drive. The sample script illustrates how to divide the database into three homogenous sets of DB2/LUW containers. You may want to increase or decrease the number of containers based on the number of physical disk drives available for your database use.

### *Multilanguage databases*

If you are installing a multilanguage database, you need to increase the size of several tablespaces configured in `XXDDLMS.SQL` to accommodate additional system data related to each non-U.S. English language.

The following table shows the amount each affected tablespace should be increased for each non-US English language:

Tablespace	Amount of Increase
PTTBL	2284 4K pages (9MB)
PSIMAGE	8408 4K pages (34MB)

### *DB2 Automatic re-sizing*

Starting with PeopleSoft PeopleTools 8.50, support for the DB2 Automatic re-sizing of Tablespaces feature is enabled by default. However, when creating a database manually, both `XXDDLMS.sql` and `XXDDLMSU.sql` scripts must be edited first to include the `AUTORESIZE` parameter for each Tablespace DDL as follows (the new entries are in bold text):

```
CREATE TABLESPACE <TBSPCNAME> MANAGED BY DATABASE USING
( FILE '/data1/psdb2/<DBNAME>/<TBSPCNAME>.DBF' 10 M
) EXTENTSIZE 16 PREFETCHSIZE 48 DROPPED TABLE RECOVERY OFF
AUTORESIZE YES INCREASE 10M MAXSIZE NONE;
```

### *Additional tablespaces*

Beginning with PeopleSoft PeopleTools 8.53, new tablespaces `PSIMAGE2`, `PSIMAGE2IDX`, and `PSIMAG2LOB` are delivered. These tablespaces are created with pagesize 16K (non-Unicode) and 32K (Unicode), and bufferpool size 16K (non-Unicode) and 32K (Unicode). These required tablespaces contain tables with LOB (CLOB/DBCLOB/BLOB) data types.

See PeopleTools 8.53 Release Notes, My Oracle Support.

Before running the Data Mover import task, verify that the `XXDDLMS.SQL` and `XXDDLMSU.SQL` scripts include these tablespaces.

## **Task 6A-2-6: Editing DBOWNER.SQL**

If you are creating a Unicode database, replace all references to `DBOWNER.sql` below with `DBOWNERU.sql`.

Edit the DBOWNER.SQL script, substituting values as specified in the following table:

Items to Edit	Appropriate Values
<db2-database-name>	The database name as specified in the CREATEDB-95.SQL or CREATEDBU.SQL script.

This script creates the PS.PSDBOWNER table.

For example:

*Original:*

```
-- Create table PS.PSDBOWNER, and grant access --
connect to <db2-database-name>
create table ps.psdowner (dbname char(8), ownerid char(8))
grant select on ps.psdowner to public
commit
```

*Unicode:*

```
-- Create table PS.PSDBOWNER, and grant access --
connect to <db2-database-name>
create table ps.psdowner (dbname VARGRAPHIC(8), ownerid VARGRAPHIC(8))
grant select on ps.psdowner to public
commit
```

---

**Note.** The Owner ID specified in this script must be the same value specified in the Access ID field in the task Creating Data Mover Import Scripts later in this chapter.

---

## Task 6A-2-7: Editing PSADMIN.SQL

Edit the PSADMIN.SQL script, substituting values as specified in the following table:

Items to Edit	Appropriate Values
db2-database-name	The database name as specified in the CREATEDB-95.SQL or CREATEDBU.SQL script.
<owner-id>	The Table Owner ID you selected earlier in this chapter.

This script grants privileges on the database to the Owner ID.

## Task 6A-3: Running SQL Scripts

---

Run the scripts edited in the preceding step to create the database and tablespaces.

To create the DB2/LUW database:

1. Log in to the DB2/LUW database server as the PeopleSoft Table Owner.

This USER ID was created in an earlier task in this installation guide.

See "Preparing for Installation," Creating PeopleSoft User ID.

2. On Microsoft Windows, run the following command:

```
db2set DB2_CREATE_DB_ON_PATH=YES
```

3. Execute the CREATEDB-95.SQL script (if non-Unicode) or the CREATEDBU.SQL script (if Unicode), using the db2 utility. For example:

- *For Microsoft Windows:*

```
db2 -vtf createdb-95.sql > createdb-95.sql.out
```

- *For UNIX:*

```
db2 -vtf createdb-95.sql |tee createdb-95.sql.out
```

After the script completes, check the log file to verify that the database has been successfully created and took all the database configuration changes.

1. Stop the instance with DB2STOP and then start it again with DB2START.
2. Execute the ALTRDB.SQL script using the db2 utility. For example:

*For Microsoft Windows:*

```
db2 -vf altrdb.sql > altrdb.sql.out
```

*For UNIX:*

```
db2 -vf altrdb.sql | tee altrdb.sql.out
```

This script enables the system to use the bufferpool specified in the BUFFPAGE parameter previously in the CREATEDB-95.SQL or CREATEDBU.SQL script.

3. If you are creating a Unicode database, execute the CREATEBPU.SQL script using the db2 utility. For example:

*For Microsoft Windows:*

```
db2 -vf createbpu.sql > createbpu.sql.out
```

*For UNIX:*

```
db2 -vf createbpu.sql | tee createbpu.sql.out
```

4. Connect to the database and execute XXDDLMS.

The user who runs this script must have read and write authority to the container (for example, /data1/psdb2/ptdbname on UNIX or C:\PS\_DB\ptdbname on Microsoft Windows). Make sure the Table Owner ID has read and write authority to these containers.

---

**Note.** If you are creating a Unicode database, replace all references to XXDDLMS.sql below with XXDDLMSU.sql.

---

- a. Connect to the new database by issuing this command (substituting your database name for HR920SYS):

```
db2 connect to HR920SYS
```

- b. Execute the SQL script by issuing this command (substituting for hrddlms as appropriate):

*For Microsoft Windows:*

```
db2 -vtf hrddlms.sql > hrddlms.sql.out
```

*For UNIX:*

```
db2 -vtf hrddlms.sql | tee hrddlms.sql.out
```

- c. Verify from the generated log file that all tablespaces were created.
5. Execute the DBOWNER.SQL script to create the PS.PSDBOWNER table and create the owner for your PeopleSoft database. Use the following command:

---

**Note.** If you are creating a Unicode database, replace all references to DBOWNER.sql below with DBOWNERU.sql.

---

*For Microsoft Windows:*

```
db2 -vf dbowner.sql > dbowner.sql.out
```

*For UNIX:*

```
db2 -vf dbowner.sql | tee dbowner.sql.out
```

6. Execute the PSADMIN.SQL script to grant DBADM privileges to the database owner. Use the following command:

*For Microsoft Windows:*

```
db2 -vf psadmin.sql > psadmin.sql.out
```

*For UNIX:*

```
db2 -vf psadmin.sql | tee psadmin.sql.out
```

After the successful execution of all the scripts detailed above, and after the database has been created, review the task Creating Data Mover Import Scripts, and the following tasks, to create and execute the Data Mover scripts to populate the database with start-up data.

## **Task 6A-4: Configuring and Testing Database Connectivity for DB2 Connect or DB2 Client V9.x or Earlier**

---

This section discusses:

- Configuring Database Connectivity for DB2 Connect or DB2 Client V9.x or Earlier
- Testing Client Connectivity for DB2 Connect or DB2 Client V9.x or Earlier

### **Task 6A-4-1: Configuring Database Connectivity for DB2 Connect or DB2 Client V9.x or Earlier**

You must configure client connectivity on the install workstation, and on any other Windows client that needs to make a two-tier connection to the PeopleSoft database. This will be required on any workstation that needs to run COBOL or SQR batch processes on the client. Use the instructions in this section if you are using DB2 Connect or DB2 Client version 9.x or earlier, where x refers to the version number.

See My Oracle Support, Certifications, for information on supported versions.

To configure each workstation connecting to DB2/LUW, you must catalog the database name and an ODBC data source using the DB2 Connect Client Configuration Assistant. You must do this for each PeopleSoft database that you have created.

To install Catalog Database on the Windows client:


1. From the Configuration Assistant panel, click Selected, Add Database Using Wizard to display the Add Database Wizard dialog box.

2. Select the Source page, and then select Manually configure a connection to a DB2 database.

Click Next to display the Protocol page.

3. On the Protocol page, select the option TCP/IP as the communication protocol.


The page will now prompt you to choose a target operating system. Do *not* select OS/400. Click Next.

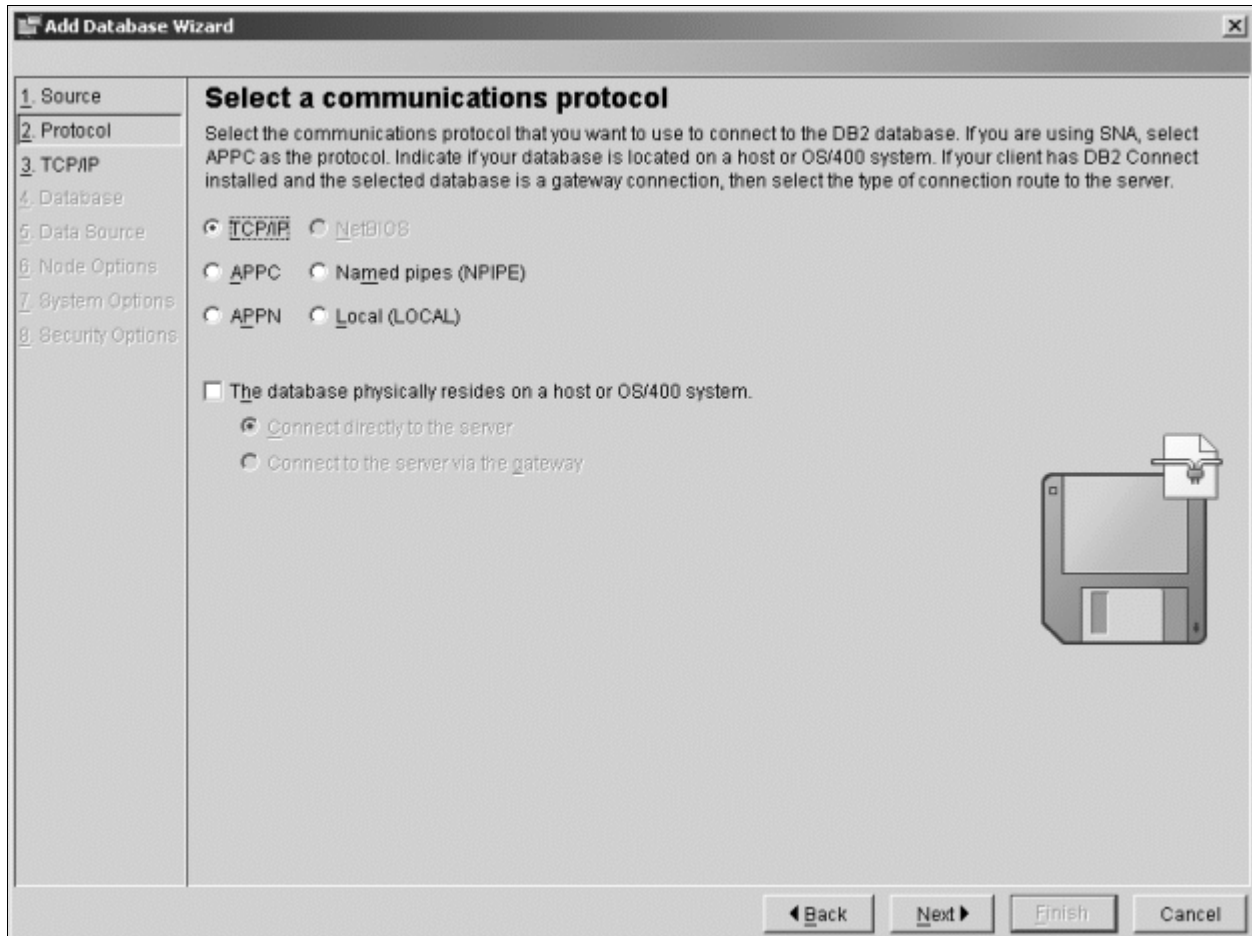

Selecting a communications protocol


4. On the TCP/IP page, type either the IP address or the DNS name of the server hosting the DB2/LUW database to which you will be connecting in the Host name field.

For the Port number, enter the TCP/IP port number assigned for the DB2 instance (IBM's default value is 50000). Consult your Operating System administrator or DBA for this information.

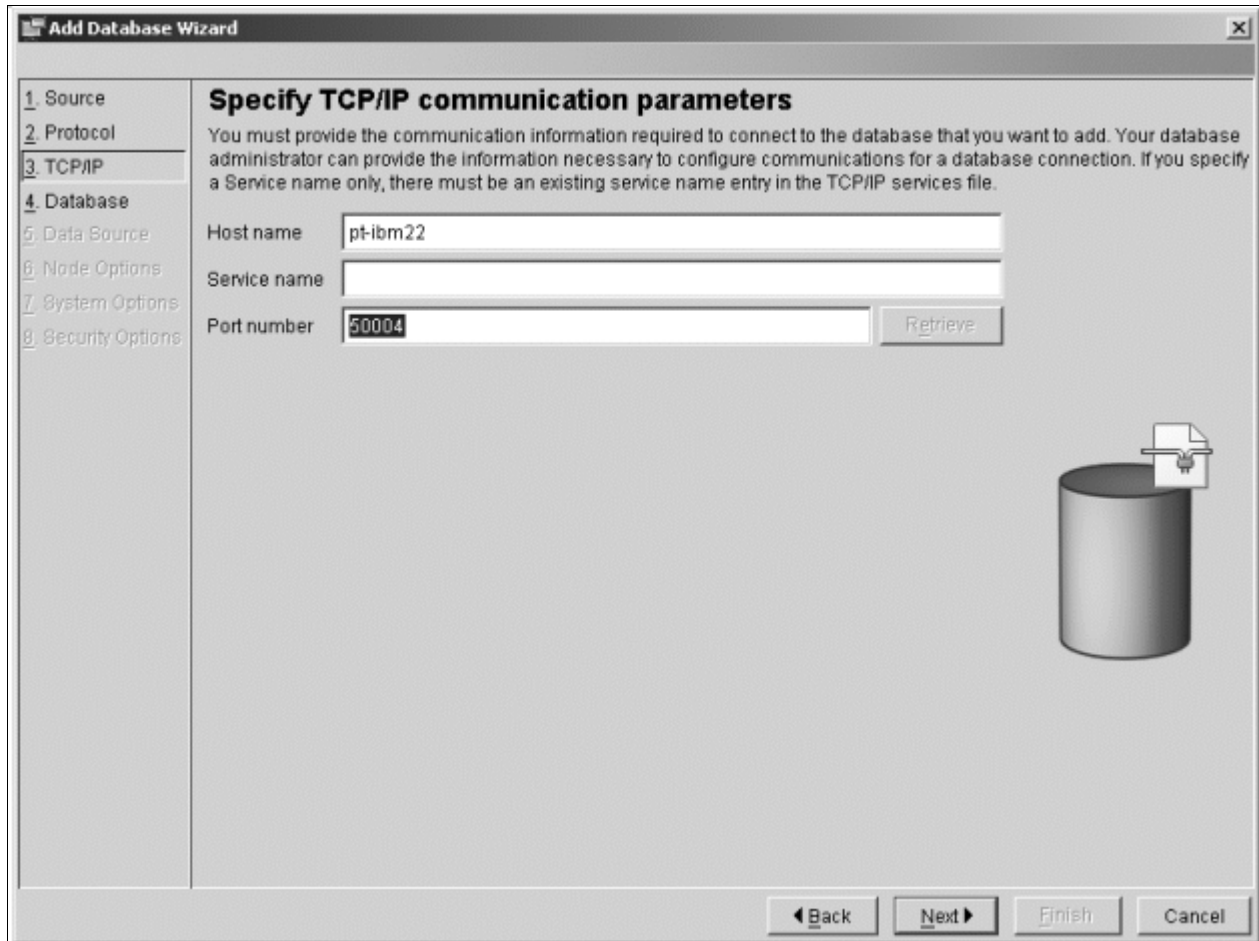


Specifying the TCP/IP communication parameters

- 5. On the Database page, enter the database name to which you will be connecting in the Database name field. Note that the Database alias should be the same as the Database name.

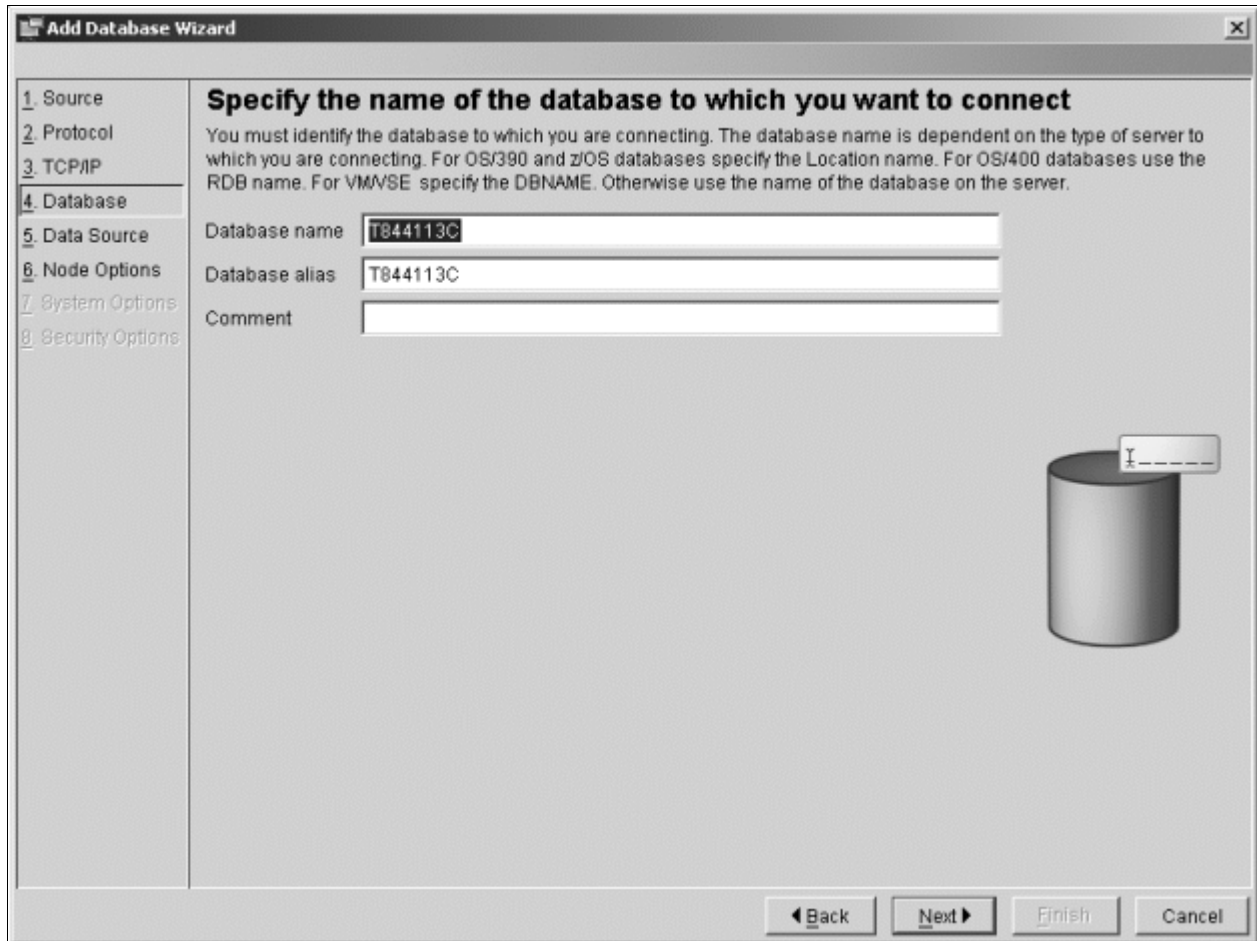

Specifying the database name

6. On the Data Source page, verify that the check box Register this database for ODBC is selected and the option As a system data source is selected.

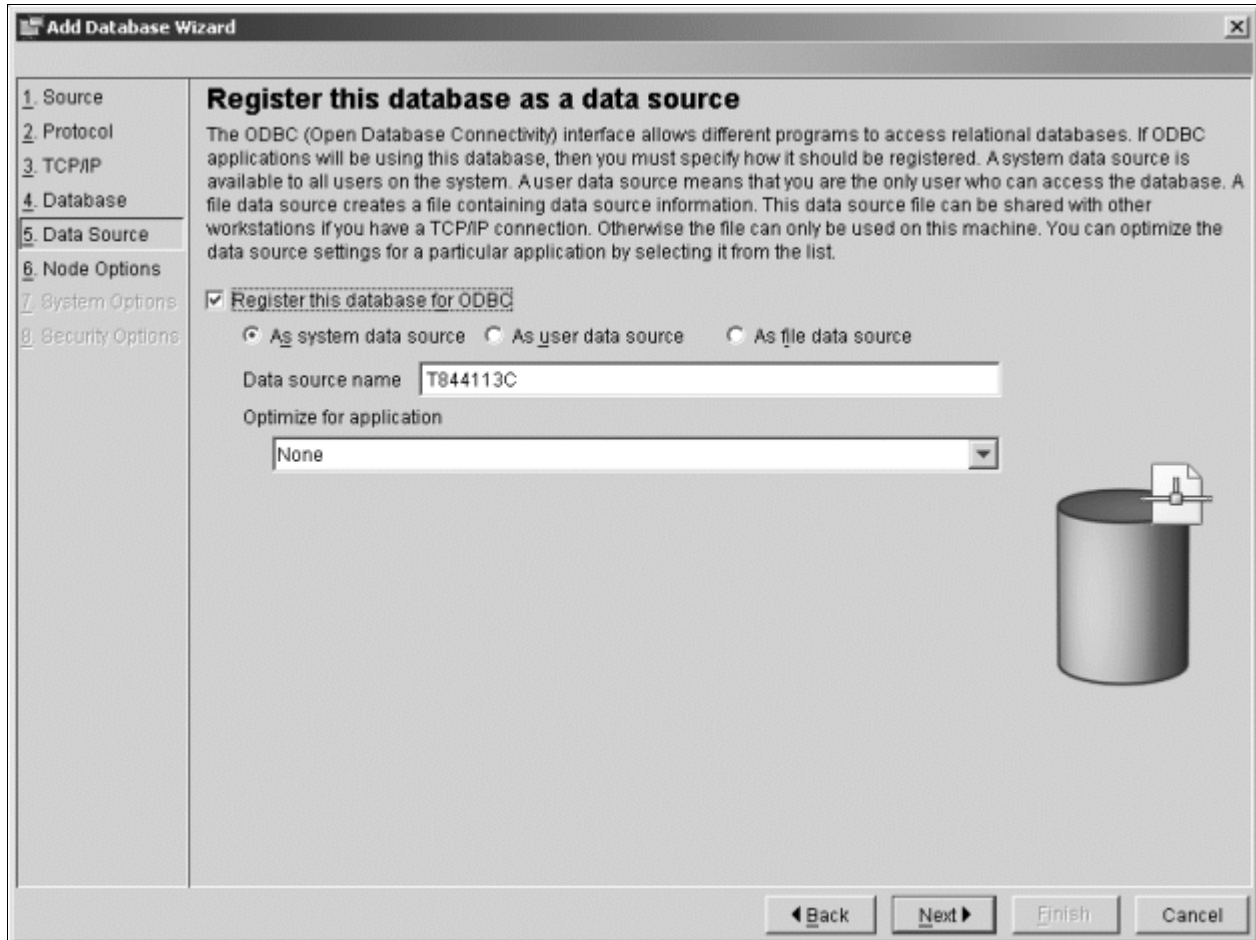


Registering the database as a data source



- 7. Verify the information on the System Option page, including the System name, Host name, and Operating system.

Click Next.

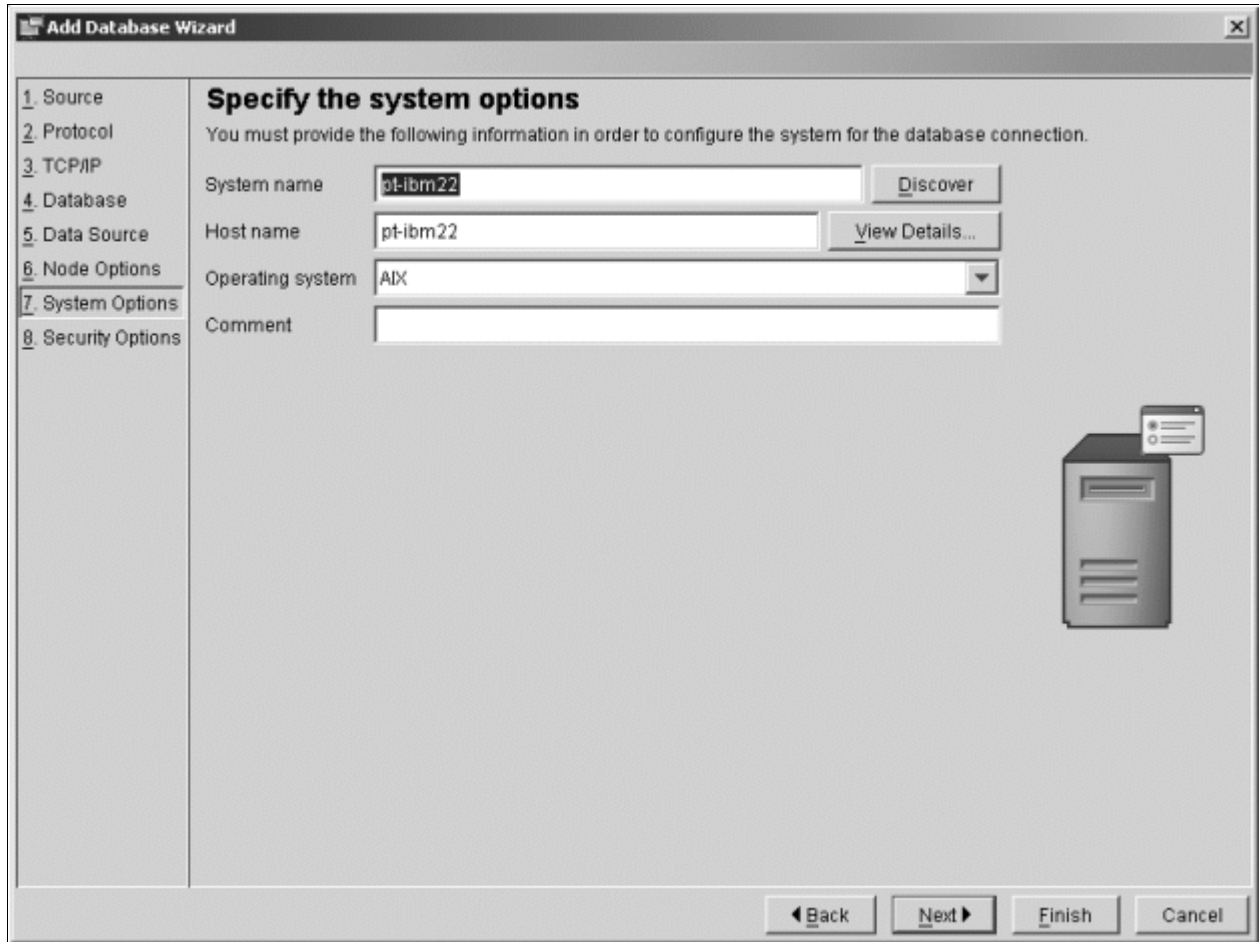

Specifying the system options

8. On the Security Options page, select Server authentication (SERVER) and leave Enable encryption *cleared*.



Specifying the security options

9. Click Finish to complete changes to the Add Database Wizard dialog box.  
 10. Modify the DB2CLI.INI file as follows:

*For Windows:*

```
<DB2 INSTALL DIRECTORY>\db2cli.ini
```

Add the following parameters to the [Common] section. (Create the [Common] section if it does not already exist.)

```
[Common]
IGNOREWARNINGS=1
DISABLEKEYSETCURSOR=1
```

*For UNIX:*

```
<DB2 INSTALL DIRECTORY>/cfg/db2cli.ini
```

Add the following parameters to the [Common] section. (Create the [Common] section if it does not already exist.)


```
[Common]
IGNOREWARNINGS=1
DISABLEKEYSETCURSOR=1
```

## Task 6A-4-2: Testing Client Connectivity for DB2 Connect or DB2 Client V9.x or Earlier

Use DB2 Connect Configuration Assistant to test connectivity to a database on the database server if you are using DB2 Connect or DB2 Client version 9.x or earlier.


To test DB2/LUW client connectivity:

1. In the Configuration Assistant, highlight the database and right-click on Test Connection:

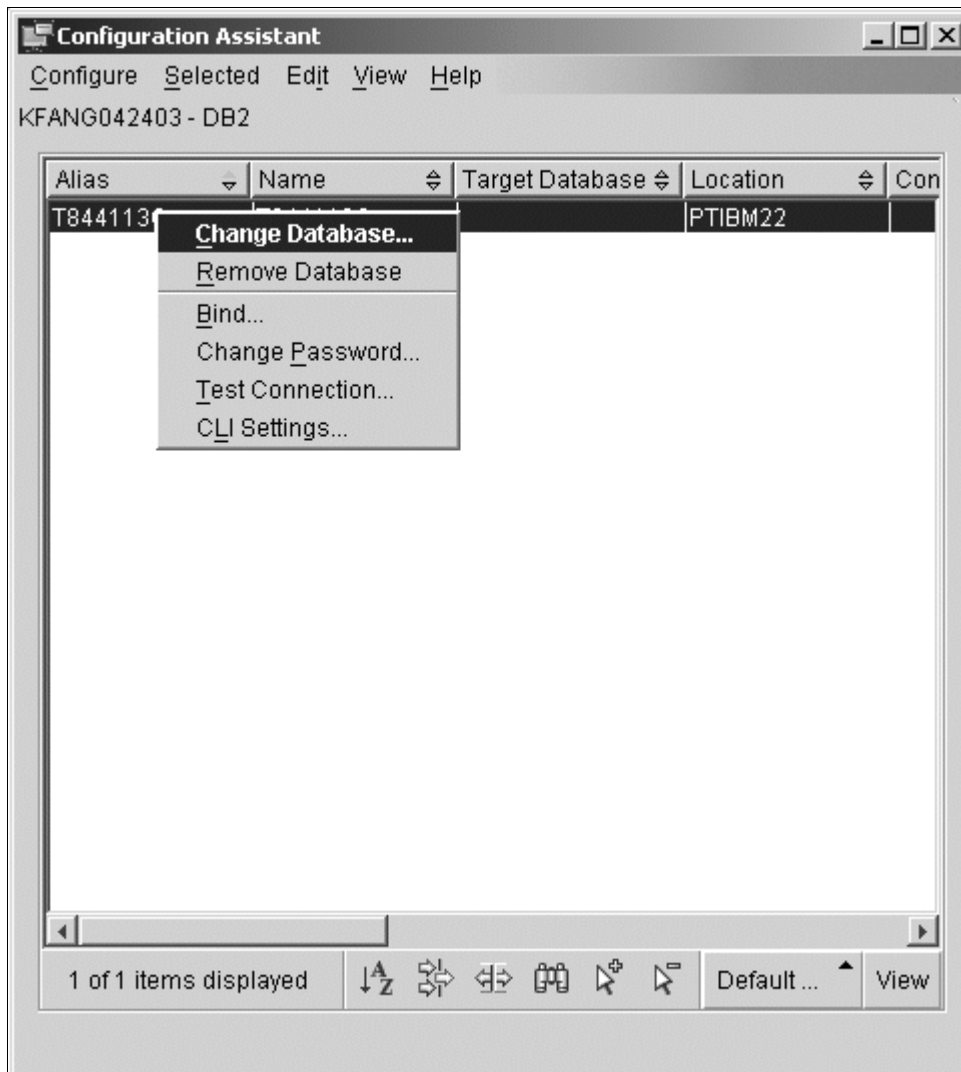


Testing connectivity with Configuration Assistant

2. Select CLI and ODBC. Enter the user ID and password as defined earlier in the task Creating PeopleSoft IDs. See "Preparing for Installation," Creating PeopleSoft User IDs.

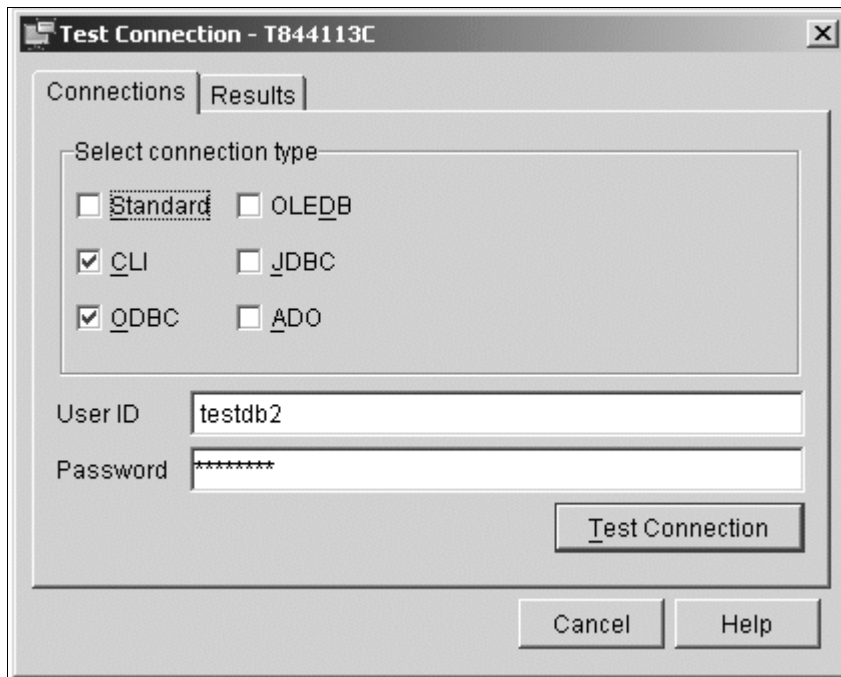

Testing connectivity settings

The following example shows the a message saying the connection tested successfully.

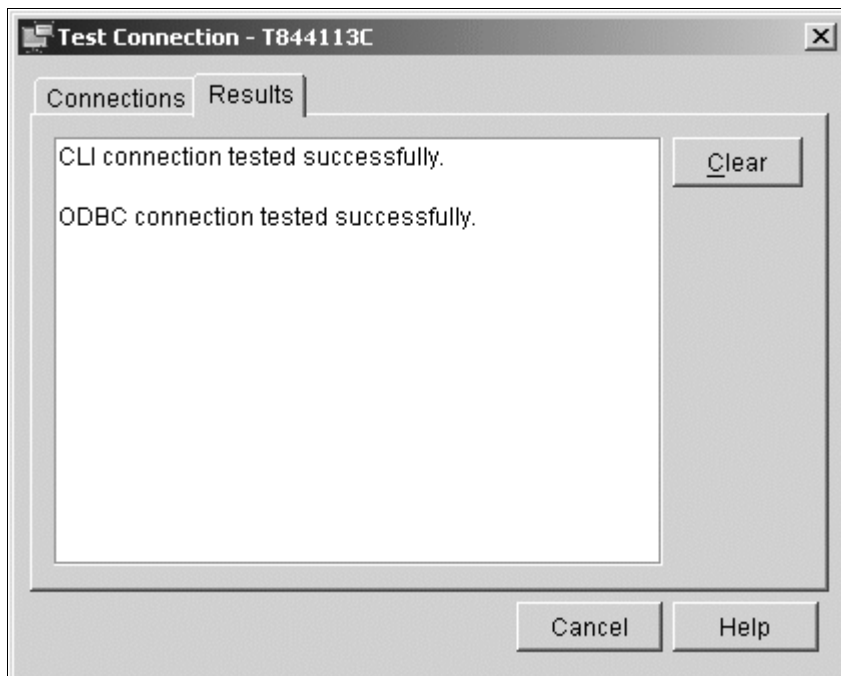

Successful connection results page

---

**Note.** Pinging or using Telnet tests network communication to the database server, but you must successfully run the connection command above to validate DB2 UDB Client Enabler connectivity.

---

If you are unable to connect check the following items:

- Review all previous tasks in this chapter.
- Is the DB2/LUW instance started?
- Can you issue the Connect command on the DB2/LUW database server using the CLP?
- Can you log into the database using the user name and password you're using as a Connect ID?
- Does the database exist on the DB2/LUW database server? Is it catalogued on the client?
- Are you spelling the database name properly on the command line? Case does not matter because CLP converts the database name to uppercase.
- On Windows, make sure the \SQLLIB directory is in the PATH.
- On Windows, make sure that environment variable DB2INSTANCE=DB2.
- Check the DB2 UDB db2diag.log diagnosis file, located by default in /<instance-owner home directory>/sqllib/db2dump/.

---

**Note.** IBM, or your DB2/LUW vendor, is best equipped to assist you if you have any problems installing any DB2/LUW products or connecting to your DB2/LUW database.

---

## **Task 6A-5: Configuring and Testing Connectivity for DB2 Connect and DB2 Client V10.x or Later**

---

This section discusses:

- Configuring Database Connectivity for DB2 Connect and DB2 Client V10.x or Later
- Testing Database Connectivity for DB2 Connect and DB2 Client V10.x or Later

### **Task 6A-5-1: Configuring Database Connectivity for DB2 Connect and DB2 Client V10.x or Later**

You must configure client connectivity on the install workstation, and on any other Windows client that needs to make a two-tier connection to the PeopleSoft database. This will be required on any workstation that needs to run COBOL or SQR batch processes on the client. Use the instructions in this section if you are using DB2 Connect or DB2 Client version 10.x or later, where x refers to the version number.

See My Oracle Support, Certifications, for information on supported versions.

---

**Note.** Configuration Assistant has been deprecated from version 10.x DB2 Connect and DB2 Client products so creating and updating the DB2 Client Catalog must be done manually.

---

To create and update the DB2 Client catalog, open a DB2 Command window for the client you wish to create the db2 catalog on and run the following commands to catalog the TCPIP NODE and the DB2 DATABASE:

```
db2 catalog TCPIP node <NODE-NAME> remote <DB2-DATABASE-HOST-NAME> server =>
<DB2-COMMUNICATION-PORT-NUMBER>
db2 catalog DATABASE <DATABASE-NAME> as <ALIAS-NAME> at node <NODE-NAME>
```

For example, to catalog a DB2 database on AIX:

```
db2 catalog TCPIP node TCPAIX06 remote qt-ibm06 server 5000
db2 catalog DATABASE T854U40 as T854U40 at node TCPAIX06
```

## Task 6A-5-2: Testing Database Connectivity for DB2 Connect and DB2 Client V10.x or Later

To test the database connectivity, run the following command:

```
db2 connect to <DATABASE-NAME> user <USER-ID> using <USER-PASSWORD>
```

For example:

```
db2 connect to T854U40 user people using people
```

## Task 6A-6: Configuring an ODBC Data Source for Connectivity on Microsoft Windows

---

This task applies only to installations on Microsoft Windows operating systems. Use these instructions to configure and validate a 64-bit ODBC data source for connectivity to PeopleSoft PeopleTools components including PeopleSoft Application Server, Application Designer and Data Mover.

This section assumes that you have installed a supported version of DB2 Client or DB2 Connect.

See My Oracle Support, Certifications.

To configure a 64-bit data source for PeopleSoft PeopleTools components:

1. Select Start, IBM DB2, *instance id*, Command Line Tools, Command Window.

For example, if you accepted the default, *instance id* would be DB2.

The Command Window opens.

2. Run the following command and confirm that the response specifies that the DB2 Client or DB2 Connect installation is 64-bit:

```
db2level
```

3. Run the following commands, specifying your DB2/LUW PeopleSoft database name:

```
db2 catalog system odbc data source <database-name>
db2 terminate
```

4. Run the following command and confirm that your data source for your database is now registered.

```
db2 list system odbc data sources
```

5. To validate, start your Application Server, Application Designer, or Data Mover.

You should not get any connectivity errors.

If the 64-bit data source is not properly configured, you see an error similar to the one below. This is an example of an error seen when starting PeopleSoft Application Server:

```
PSADMIN.3992 (0) [12/30/11 00:22:52] (0) Begin boot attempt on domain=>
Q8533I1E
```

```
PSAPPSRV.3612 (0) [12/30/11 00:23:04] (0) PeopleTools Release 8.56 =>
(Windows) starting. Tuxedo server is APPSRV(99)/2
```

```
PSAPPSRV.3612 (0) [12/30/11 00:23:04] (0) Cache Directory being used: d=>
```

```
\pshome\appserv\Q8533I1E\CACHE\PSAPPSRV_2\
```

```
PSAPPSRV.3612 (0) [12/30/11 00:23:04] (3) File: SQL Access ManagerSQL⇒  
error.
```

```
Stmt #: 2 Error Position: 0 Return: 8600 - [Microsoft][ODBC Driver⇒  
Manager]
```

```
The specified DSN contains an architecture mismatch between the Driver⇒  
and Application (SQLSTATE IM014) 0
```

```
PSAPPSRV.3612 (0) [12/30/11 00:23:04] (1) GenMessageBox(200, 0, M): SQL⇒  
Access Manager: File: SQL Access ManagerSQL error. Stmt #: 2 Error⇒  
Position: 0 Return: 8600 - [Microsoft][ODBC Driver Manager] The⇒  
specified DSN contains an architecture mismatch between the Driver and⇒  
Application (SQLSTATE IM014) 0
```

```
PSAPPSRV.3612 (0) [12/30/11 00:23:04] (1) GenMessageBox(0, 0, M):⇒  
Database Signon: Could not sign on to database Q8533I1E with user⇒  
QEDMO.
```

```
PSAPPSRV.3612 (0) [12/30/11 00:23:04] (0) Server failed to start
```

```
PSADMIN.3992 (0) [12/30/11 00:23:11] (0) End boot attempt on domain⇒  
Q8533I1E
```

## **Task 6A-7: Creating Data Mover Import Scripts**

---

This section discusses:

- Understanding Data Mover Import Scripts
- Working with Multilingual Databases
- Running Database Setup to Create Data Mover Import Scripts

### **Understanding Data Mover Import Scripts**

The Data Mover Import scripts are used to populate the PeopleSoft database with data. You use the Database Setup feature of the PeopleSoft Data Mover utility to create the Data Mover import scripts.

---

**Note.** This task and the next one (Running Data Mover Import Scripts) should be executed from a Microsoft Windows client machine. Before you can load PeopleSoft data from a Microsoft Windows client machine, you need to install PeopleSoft PeopleTools and your PeopleSoft Application to the Microsoft Windows client machine and be sure to select File Server and Database Server.

---

To complete the database creation procedure you must supply information on various authorization IDs and passwords, including Access ID, Connect ID, Symbolic ID, and User IDs. Before beginning this procedure, review the information in the section Planning Database Creation and make a note of the authorization information for your environment. For PeopleSoft PeopleTools 8.53 and later releases, the user profiles in PeopleTools demo databases are delivered disabled. During the procedure to create Data Mover import scripts you will choose whether to enable the delivered user profiles, and how to assign passwords for the profiles. In addition, you will supply several passwords that were previously provided as defaults. Be sure to note the passwords that you supply, as they will be needed for subsequent installation procedures.

See the information on administering user profiles in the *PeopleTools: Security Administration* product documentation.

See "Preparing for Installation," Planning Database Creation.

## Task 6A-7-1: Working with Multilingual Databases

All PeopleSoft releases are shipped with English as the database's base language. Therefore when selecting components for the Data Mover Import script, you must select the English components in addition to any other languages you are installing. After the installation is complete, you can change the database's base language to the language that you plan to use most frequently, or leave the base language as English.

Read the section Planning Multilingual Strategy for information on installing multiple languages and changing your base language.

See "Preparing for Installation," Planning Multilingual Strategy.

If you are creating a database and want to load Oracle-provided translations for non-English languages, you must load English (ENG) in addition to the foreign language components.

If you are creating a non-Unicode database, you must ensure that the languages you select are all supported by the character set you used to create your database.

---

**Note.** During the database setup process, you have the option to select the database's base language. Select the language that you plan to use most frequently. If the database's base language is different than that set in this database setup process, generate the SWAP\_BASE\_LANGUAGE command in the Data Mover Import script to swap the language.

See *PeopleTools: Global Technology*.

---

## Task 6A-7-2: Running Database Setup to Create Data Mover Import Scripts


To create the import scripts using Data Mover:

See *PeopleTools: Data Management*.

1. Run Configuration Manager by using one of the following methods:
  - On Microsoft Windows 2012 R2, access the Apps screen and navigate to PeopleTools 8.56, Configuration Manager.
  - Run `PS_HOME\bin\client\winx86\pscfg.exe`.



- Verify in the Signon Defaults on the Startup page that the Database Type of DB2 UDB for Unix, NT is selected, as shown in the example.

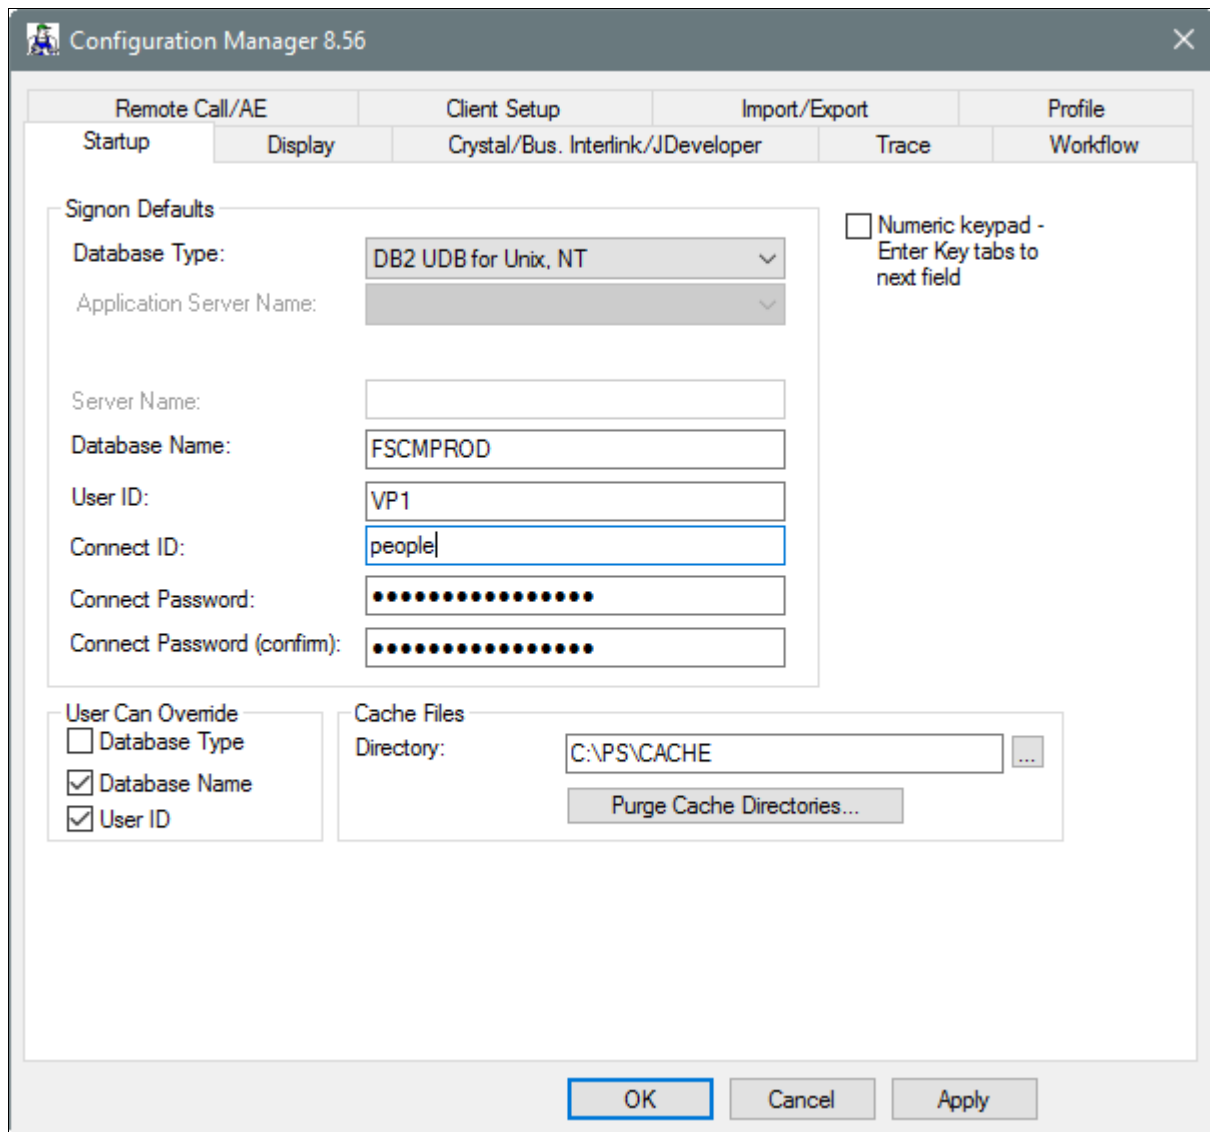

Startup tab on the Configuration Manager dialog box

- Verify that the connect ID is correct.  
If you accepted all defaults, the connect ID is people. Enter and confirm a value for the connect ID password.
- If the *PS\_APP\_HOME* location is not the same as *PS\_HOME*, make sure it is set in Configuration Manager, as follows:
  - In Configuration Manager, select Profile.
  - Highlight the Default Profile and select Edit.
  - On the Edit Profile dialog box, select the Process Scheduler tab.
  - Verify that the *PS\_APP\_HOME* value is correct.  
See "Setting Up the Install Workstation," Editing the Default Profile.
- Run Data Mover by using one of these methods:

- On Microsoft Windows 2012 R2, access the Apps screen and navigate to PeopleTools 8.56, Data Mover.
  - Run `PS_HOME\bin\client\winx86\psdmt.exe`.
6. Log on using the access ID as the user id to start Data Mover in bootstrap mode; this should be the user that creates the database.

See [Checking the Log Files and Troubleshooting, Running Data Mover](#).


---

**Note.** You must limit the access ID to eight characters or less. You must limit the access password to 30 characters or less.

---

7. Select File, Database Setup.

The Database Setup dialog box appears, as shown in this example:

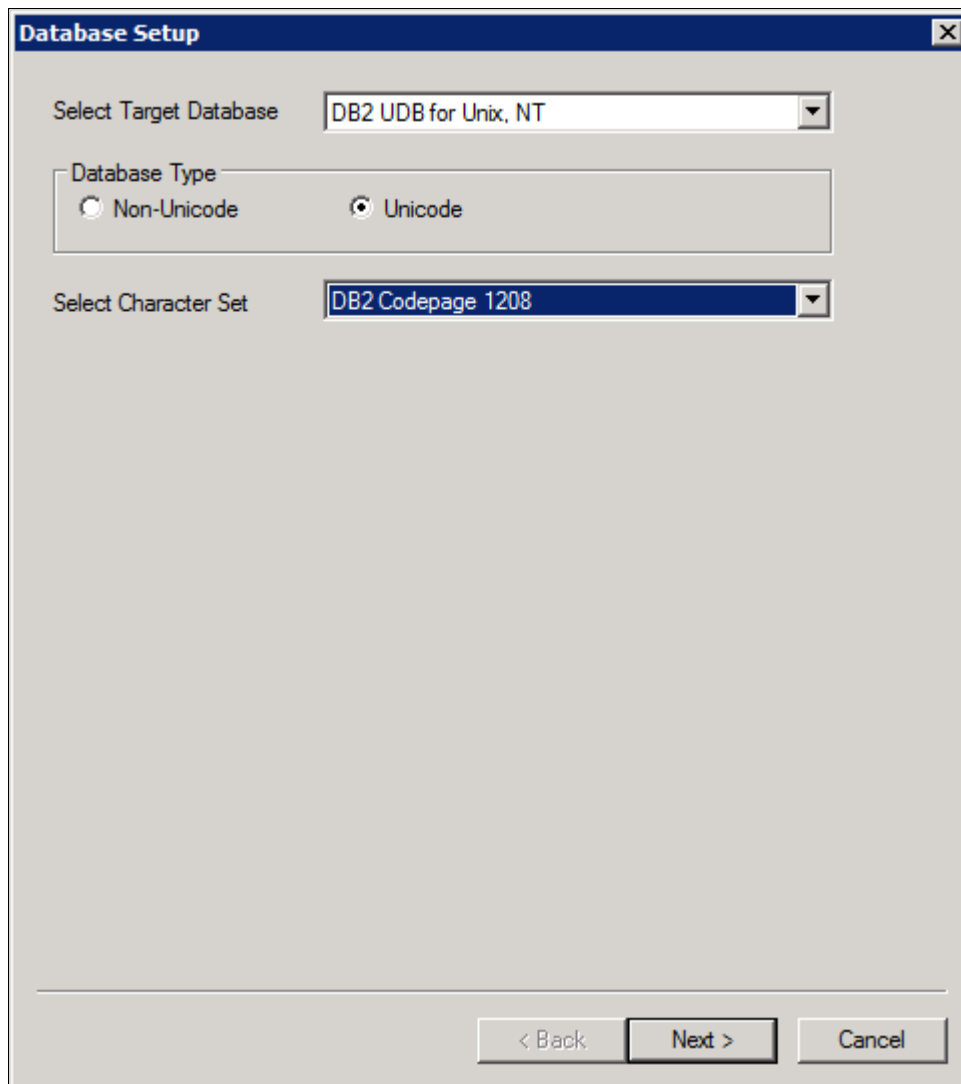

Selecting target database and character set on the Database Setup dialog box

8. Select your database platform from the Select Target Database drop-down list.
9. Select your database type, Unicode or non-Unicode, and character set.

Choose the Database Type—Unicode or Non-Unicode—that you selected in the section on multilingual strategy. If you choose Non-Unicode, select the character set that you decided upon in that section from the

drop-down list.

---

**Note.** When you select a non-Unicode character set, only the characters within that character set can be stored in your database. Oracle recommends that you create your database using Unicode.

---

See "Preparing for Installation," Planning Multilingual Strategy.

---

**Note.** The database setup does not actually modify the character set of your database. That is done by the DBA during database creation. The database setup process only creates customized scripts based on your selection.

---

10. Select the Demo or System radio button, depending on which type of PeopleSoft database you are installing.
11. Select the Products for which you want to create a Data Mover script from the PeopleSoft Application list box, and move the items you have selected into the Data Mover Scripts to Create list box by clicking on the Add or Add All button.

If you installed the Multilanguage software, each application will be listed several times, once for each language. If you are installing languages other than English, make sure to select the appropriate language data files for each application you select in English. This will load the translated database objects.

See "Preparing for Installation," Planning Multilingual Strategy.

If you are installing an application in any language other than English, you must also select the English component of the application. For example, if you select PeopleSoft Fin/SCM - French, you must also select PeopleSoft Fin/SCM Database - US English. This ensures that you install the necessary base-language components.

12. Set the database parameters described below and then click Finish.

The screenshot shows a dialog box titled "Database Setup - Database Parameters". It contains the following fields and options:

- Database Name: FSCMPROD
- Symbolic ID: db2adm
- Access ID: db2adm
- Access Password: (empty)
- Connect ID: people
- Application Server ID: (empty)
- Application Server Password: (empty)
- Web Server ID: PTWEBSERVER
- Web Server Password: (empty)
- Enable All Profiles
- Set Global Password
- Global Password: (empty)

At the bottom of the dialog box are three buttons: "< Back", "Finish", and "Cancel".

Specifying Database Parameters on the Database Setup dialog box

- *Database Name:* Specify the database name that users will enter on the PeopleSoft signon screen. This corresponds to the owner ID. It can be up to eight characters long and must be entered in uppercase.
- *Symbolic ID:* This is used as the key to retrieve ACCESSID and ACCESSPSWD from PSACCESSPROFILE.  
For initial installation set it equal to the Database Name. The symbolic ID cannot be longer than eight characters.
- *Access ID:* Specify the user you used to create the database. Limit this to eight characters or less.  
This value is case sensitive. You will use the access ID every time you want to sign on to Data Mover in bootstrap mode. Limit this to eight characters or less.  
See "Preparing for Installation," Creating PeopleSoft IDs for more information about access IDs.
- *Access Password:* This is the PeopleSoft access ID password defined in the chapter "Preparing for Installation." Limit this to 30 characters or less.
- *Connect ID:* This is the connect ID that is used for the initial connection to DB2/LUW. This ID is used for connecting to the database. Limit this to eight characters or less.

---

**Note.** The connect ID was defined as a valid logon ID in the database security management software. The connect ID only needs to be granted SELECT access on PSACCESSPROFILE, PSOPERDEFN, and PSSTATUS. This ID should be granted no other database authorities.

---

Refer to the section Creating PeopleSoft IDs in the chapter "Preparing for Installation " for more information about connect IDs.

- *Application Server ID:* The Application Server ID has privileges to start or shut down the Application Server domain. It is also used during the Application Server configuration. Enter one of the delivered PeopleSoft user IDs.
- *Application Server Password:* Specify a password for the Application Server ID.
- *Web Server Password:* Specify a password for the Web Server ID.

The default Web Server ID, as displayed in the example, is PTWEBSERVER. The Web Server ID, also referred to in this documentation as Web Profile User ID, is used to access the web profile information from the database through the Application Server Jolt service.

- *Enable All Profiles:* Select this option to leave the User profiles (other than the Application Server profile and the Web Server User profiles) unchanged.

If you do not select this option, all of the User profiles in the database, with the exception of the Application Server profile and Web Server User profiles, remain disabled as delivered.

- *Set Global Password:* If you enabled all profiles, you can choose to set the same password for all of the profiles.

---

**Note.** This option is enabled when the Enable All Profiles option is selected, as shown in the example.

---

- *Global Password:* Enter the password to be used for all user profiles.

---

**Note.** This option is enabled when the Set Global Password option is selected, as shown in the example.

---



---

**Note.** The connect ID was defined as a valid logon ID in the database security management software. The connect ID only needs to be granted SELECT access on PSACCESSPROFILE, PSOPERDEFN, and PSSTATUS. This ID should be granted no other database authorities.


---

### 13. Select your database's base language.

**Note.** This window appears only if you selected a database for a language other than English. If you see this window it is critical to select the correct base language. When you select a base language other than ENG, DBSETUP generates the Data Mover import script with the SWAP\_BASE\_LANGUAGE command to swap the base language.

See "Preparing for Installation," Planning Multilingual Strategy.

See Working with Multilingual Databases.

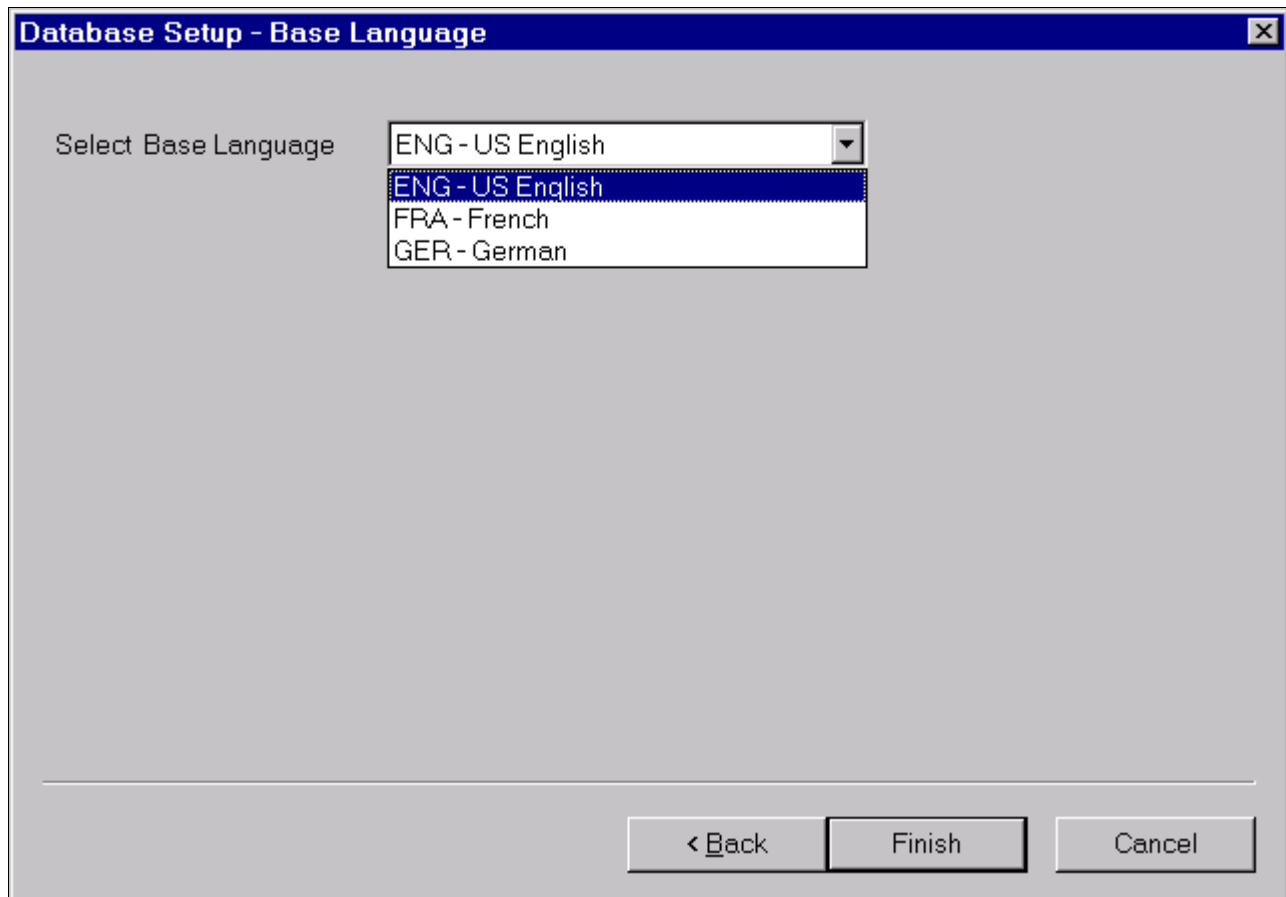

Selecting a base language in the Database Setup dialog box

Use the following information in making your selection:

- If you have not already done so, read the earlier section on multilingual strategy before determining whether to install multiple languages and whether to change your base language.
- If you are creating a database and want to load Oracle-provided translations for non-English languages, you must load English (ENG) in addition to the foreign language components.
- All PeopleSoft releases are shipped with English as the database's base language. Therefore when selecting components for the Data Mover Import script, you must select the English components in addition to any other languages you are installing. During the Database Setup wizard, you need to select the database's base language that you plan to use most frequently. If your database's base language is different than the Database Setup wizard generate the SWAP\_BASE\_LANGUAGE command in the Data Mover Import script to swap the language.
- If you are creating a non-Unicode database, you must ensure that the languages you select are all

supported by the character set you used to create your database.

14. Click Finish.

---

**Note.** If the Database Setup - Base Language window does not appear, click Finish after supplying the parameters on the Database Setup - Database Parameters window.

---

At this point you are in Data Mover, with the DMS script you just created ready to run.

## See Also

*PeopleTools: Data Management*

*PeopleTools: Security Administration*, "PeopleSoft Authorization IDs"

## Task 6A-8: Running Data Mover Import Scripts

---

This section discusses:

- Understanding Data Mover Import Scripts
- Populating Tables in the PeopleSoft Database

### Understanding Data Mover Import Scripts

Now you will run the Data Mover scripts (DMS) that you created in the preceding task to import the data for your PeopleSoft database. The Data Mover script creates either a system (SYS) or a demo (DMO) database.

When you initially logged onto Data Mover to create the DMS scripts, you logged in with the Access ID and password, using bootstrap mode. You need to use bootstrap mode to run the Data Mover import script, because there are not yet any PeopleSoft security tables in the database.

When you start Data Mover in bootstrap mode, the word "BootStrap" appears in the Data Mover status bar.

See *PeopleTools: Data Management*.

## See Also

Checking the Log Files and Troubleshooting, Running Data Mover

### Task 6A-8-1: Populating Tables in the PeopleSoft Database

To populate tables in the PeopleSoft database:

1. The DMS import script for your application will contain hard-coded file names for log files and data files.  
Modify the DMS script if you have moved any files from the delivered directories or want to write log files to another location than that specified in the script.
2. Select File, Run to execute the script.

When you run the script, Data Mover typically performs the following actions:

- **IMPORT \***  
Create all the PeopleTools and application tables with their indexes.

- **ENCRYPT\_PASSWORD \***  
Encrypt security information for the database.
- **CREATE\_TRIGGER \***  
Create application required triggers.
- **REPLACE\_VIEW \***  
Create PeopleSoft views.
- **CREATE\_TEMP\_TABLE \***  
Create PeopleSoft temporary tables.

## **Task 6A-9: Checking the Log Files and Troubleshooting**

---

This section discusses:

- Checking the Log Files
- Running Data Mover
- Troubleshooting
- Improving Performance

### **Task 6A-9-1: Checking the Log Files**

After running each Data Mover script, examine the .LOG files to make sure that all the commands were executed successfully. The log files are located in the directory you specified in the Data Mover script.

See "Setting Up the Install Workstation," Editing the Default Profile.

### **Task 6A-9-2: Running Data Mover**

Use one of these methods to run Data Mover.

Microsoft Windows

- On Microsoft Windows 2012 R2, access the Apps screen, and navigate to PeopleTools 8.56, Data Mover to run a graphical user interface (GUI mode).
- Run `PS_HOME\bin\client\winx86\psdmt.exe` from the command line.

On UNIX, run `PS_HOME/bin/psdmtx` from the command line.

If you use the access ID that you specified during the database configuration to log on, you log on in "bootstrap mode." When you start Data Mover in bootstrap mode, the word "BootStrap" appears in the Data Mover status bar.

If you use a valid PeopleSoft Operator ID, such as PS for Human Capital Management or VP1 for Financials/Supply Chain Management, you log on in "user mode." In this mode, no designation appears in the Data Mover status bar.

### **See Also**

*PeopleTools: Data Management*



## Task 6A-9-3: Troubleshooting

If the DMS script has stopped midway (this can happen for a number of reasons) you need to edit the script and start again.

If running a script results in an SQL error, it may be because the PS.PSDBOWNER table contains duplicate rows, an invalid user ID is specified, or the Owner ID column in the PSLOCK table is specified in uppercase or is incorrect. If this is the case fix PS.PSDBOWNER.

To edit and restart the DMS script:

1. Determine the record that was being imported (that is, which IMPORT command was running) when the script stopped, and use the following guidelines to edit and rerun the DMS scripts.

When building a DMO database or a multilingual database, adding the SET START statement can be tricky because the Data Mover script used to load the database will include more than one IMPORT statement. The key is to view the log files and determine which IMPORT section of the script Data Mover failed on.

- If the failure occurred during the first IMPORT statement, add the SET START statement before the first IMPORT \*; statement.
- If the failure occurred during a subsequent IMPORT statement, comment out all statements preceding the IMPORT \*; statement where the failure occurred and add the SET START statement before the IMPORT \*; statement of the section in which the failure occurred.
- *This is very important:* If you see any "unique index constraint" error messages in the "Building required indexes" section, your IMPORT script failed during a subsequent IMPORT but the SET START statement was added to the first IMPORT. In this situation, you can run the Data Mover script in its originally generated form, with only one modification. In the first IMPORT section, change the statement "IMPORT \*;" to "REPLACE\_DATA \*;". This will delete all the data in the tables, and re-import it. This process will take some time to run, and you will need to separately create each of the indexes that failed.

2. Run Data Mover as previously described.

See Running Data Mover.

The PeopleSoft Logon dialog box appears.

3. Log on using the Access ID to start Data Mover in *bootstrap mode*.

Use the Access ID you specified when you created the Data Mover scripts with the Database Setup utility.

The input window should display the DMS import script for the database. The script has the format <dbname>dbx.dms.

4. If necessary, select File, Open, and browse to the *PS\_HOME/scripts* directory to find the appropriate DMS script.
5. Add the following line before the offending IMPORT command (the one being executed when the failure occurred):

```
SET START <RECORD NAME>;
```

<RECORD NAME> is the name of the record that failed. Make sure to review the Data Mover log file to see where the script failed and locate the last record that imported successfully. The SET START command will begin the Data Mover import at the specified record name.

---

**Note.** It is a good idea to change the name of the log file in the script before each attempt at running it. This ensures that you have a separate log file for each attempt, if you run the import more than once.

---

For example, if the script stops and the table is partially inserted with a message similar to this one:

```
Importing PSPNLFIELD
Rows inserted into PSPNLFIELD

3000
```

First drop the partially inserted table (for example, record) by using the DROP TABLE command, and then restart Data Mover at the record that failed using the SET START command and continue the Data Mover import. This can be done in a single pass.

Add the following lines before the offending IMPORT \*; command (the one being executed when the failure occurred):

```
SET START <RECORD NAME>;
DROP TABLE <RECORD NAME>;
```

where <RECORD NAME> is the name of the record that failed. The SET START statement will begin the Data Mover import at the specified <RECORD NAME>.

*Example of the original script:*

```
REM - PeopleSoft Database - US English
/
SET LOG epengs.log;
SET INPUT epengs.db;
SET COMMIT 30000;
SET NO VIEW;
SET NO SPACE;
SET NO TRACE;
SET UNICODE ON;
IMPORT *;
```

*Example of script after modification, with changes in bold font:*

```
REM - PeopleSoft Database - US English
/
SET LOG epengs2.log;
SET INPUT epengs.db;
SET COMMIT 30000;
SET NO VIEW;
SET NO SPACE;
SET NO TRACE;
SET UNICODE ON;
SET START PSPNLFIELD;
DROP TABLE PSPNLFIELD;
IMPORT *;
```

For the DROP statement, for records with a rename without a leading PS, add PS\_ to the beginning of the rename; otherwise the table will not be found. For example, PS\_<RECNAME>.

- Restart the script in Data Mover by selecting File, Run Script, or use the psdmtx command to execute Data Mover on the command line.

## Task 6A-9-4: Improving Performance

The following tips can help you save time when running the Data Mover scripts:

- Run Data Mover from the fastest workstation available.

- Run Data Mover on the database server.
- Run only a single instance of Data Mover, and do not have any other applications running during the import.
- In the PeopleSoft Configuration Manager, turn off all trace options.  
Tracing during a DMS load will add considerable time to the process.
- Copy the database file over to the workstation so that Data Mover can access it locally instead of over the network.
- Run Data Mover on the database server with the .db or .dat file located locally.

If you are comfortable changing the options available for a DB2/LUW instance and database, you might consider "tuning" the instance and database used for the import. Some of these options are appropriate only during the import, so you may not want to keep them in effect after the import is complete.

## **Task 6A-10: Changing the Base Language**

---

The information in the earlier task Planning Multilingual Strategy will help you determine whether you should change your base language, and lists the currently supported languages.

See "Preparing for Installation," Planning Multilingual Strategy.

See PeopleTools Certifications — Supported Languages, My Oracle Support (search for article name).

This task applies only if your users will be operating PeopleSoft applications *primarily* in one particular language other than English. It gives a performance boost to the language you designate as the base language, but requires more administrative overhead than leaving English as the base language. The details are spelled out in the *PeopleTools: Global Technology* product documentation.



## Chapter 6B

# Creating a Database on UNIX

This chapter discusses:

- Understanding the Database Configuration Wizard
- Fulfilling PeopleSoft Database Configuration Wizard Prerequisites
- Running the Database Configuration Wizard
- Changing the Location of the DB2/LUW Database Log Files
- Checking the Log Files and Troubleshooting

## Understanding the Database Configuration Wizard

---

The Database Configuration Wizard is a tool designed to simplify your PeopleSoft database installation. When you run the Database Configuration Wizard, Data Mover is also running silently.

See *PeopleTools: Data Management*.

---

**Important!** Do not forget that application-specific installation steps are provided in a separate document specific to the application. For instance, if you are performing PeopleSoft CRM installation, you need both this PeopleSoft PeopleTools installation guide and you also need any additional instructions provided by CRM. My Oracle Support provides installation guides that are specific to your application.

---

See My Oracle Support, (search for "installation," the application name, and release).

You also have the option of using a manual process for creating a PeopleSoft database, instead of using the Database Configuration Wizard. The manual process is mandatory for some configurations.

See "Creating a Database Manually on Microsoft Windows or UNIX."

---

**Note.** For the sake of brevity, this documentation sometimes refers to DB2 UDB for Linux, UNIX, and Windows as *DB2/LUW*.

---

After you complete the tasks in this chapter, read the chapter "Completing the Database Setup." Depending upon your environment, you may not need to carry out every task in that chapter. However it is important that you evaluate the requirements and perform the necessary tasks.

## Task 6B-1: Fulfilling PeopleSoft Database Configuration Wizard Prerequisites

---

This section discusses:

- Installing the PeopleSoft Database Server Components on the Database Server

- Completing Registry Settings
- Rebinding of Packages Requirement
- Completing Required CLI Settings in the DB2CLI.INI File
- Defining Database Manager Configuration
- Defining Database Configuration
- Running the Shell Script psconfig.sh

## Task 6B-1-1: Installing the PeopleSoft Database Server Components on the Database Server

To run the PeopleSoft Database Configuration Wizard, your setup *must* fulfill these requirements:

- You must have installed the PeopleSoft PeopleTools software on your database server by running the PeopleSoft Installer.
- You must have chosen the Database Server option during the PeopleTools software installation.
- You must have installed the Database component of your application installation software to your database server.
- You must have the PeopleTools Development Environment set up to create your database.
- You must have the Oracle Tuxedo software installed before you run the Database Configuration Wizard.

The Database Configuration Wizard invokes the PeopleSoft Data Mover utility. Data Mover on the UNIX platform has a dependency on the Oracle Tuxedo software. Install Oracle Tuxedo and verify that the TUXDIR environment variable is set.

See Installing Oracle Tuxedo.

- You must run the Database Configuration Wizard at the database server.

---

**Note.** Before you can configure the database, the system administrator ID must have a corresponding password.

---

See the information on PeopleSoft Configuration Manager in the *PeopleTools: System and Server Administration* product documentation.

### See Also

"Using the PeopleSoft Installer"

"Setting Up the Install Workstation"

## Task 6B-1-2: Completing Registry Settings

For the Database Configuration Wizard to run successfully, certain DB2 UDB for Linux, UNIX, and Windows registry settings must be set. These settings are required for the Database Configuration Wizard and PeopleSoft PeopleTools to function properly:

Required DB2/LUW Registry Setting	Purpose
db2set DB2CODEPAGE=1208 (Unicode only)	Sets the client codepage to Unicode.
db2set DB2_MIN_DEC_DIV_6=yes	Supports decimal precision up to 31 decimal places.

### Task 6B-1-3: Rebinding of Packages Requirement

For DB2/LUW clients that are at a higher fixpack than the server, a rebind of the DB2/LUW utilities packages and CLI packages is required for each new database that the client will be accessing. The rebind is required because our truncate table support uses the DB2/LUW import function to truncate the table. The import function requires rebinding of the DB2/LUW utilities package. The commands for rebinding are:

```
"DB2 bind @db2ubind.lst blocking all grant public" for DB2 utilities⇒
packages.
"DB2 bind @db2cli.lst blocking all grant public" for CLI packages.
```

### Task 6B-1-4: Completing Required CLI Settings in the DB2CLI.INI File

Complete the following required CLI settings in the DB2CLI.INI file. These settings are required for the Database Configuration Wizard and PeopleSoft PeopleTools to function properly.

- DISABLEKEYSETCURSOR=1 (COMMON STANZA)

This is needed for SQR to function properly.

- IGNOREWARNINGS=1 (DATABASE STANZA)

This is used to suppress the warning message that appears when an UPDATE or DELETE statement is executed without a WHERE clause.

---

**Note.** The default DB2CLI.INI file delivered by IBM does not contain the COMMON STANZA or DATABASE STANZA. You will need to edit the DB2CLI.INI file and add the COMMON STANZA or DATABASE STANZA. Below is an example of COMMON STANZA and DATABASE STANZA for database ABC to be added to the DB2CLI.INI file.

```
[COMMON]
```

```
DISABLEKEYSETCURSOR=1
```

```
[ABC]
```

```
IGNOREWARNINGS=1
```

---

### Task 6B-1-5: Defining Database Manager Configuration

The DB2/LUW database manager configuration parameters are in the dbmcfg.sql file. These are the minimum requirements provided by Oracle for the database manager configuration. But these dbm parameters are *not* necessarily the optimal configuration for your environment. You may need to configure your DB2/LUW instance so that it is optimal for your environment.

### Task 6B-1-6: Defining Database Configuration

The database configuration parameters are in one of the following files:

- CREATEDB-95.SQL — Non-Unicode
- CREATEDBU.SQL — Unicode

These are the minimum requirements provided by Oracle for creating a PeopleSoft database. But these database parameters are *not* necessarily the optimal database configuration. You will need to tune it for your environment. You can add to or update the `CREATEDB-95.SQL` or `CREATEDBU.SQL` file with the appropriate database parameters for your environment because the Database Configuration Wizard will use it as a template to create a PeopleSoft database.

Beginning with PeopleSoft PeopleTools 8.53, new tablespaces `PSIMAGE2`, `PSIMAGE2IDX`, and `PSIMAG2LOB` are delivered. These tablespaces are created with pagesize 16K (non-Unicode) and 32K (Unicode), and bufferpool size 16K (non-Unicode) and 32K (Unicode). These required tablespaces contain tables with LOB (CLOB/DBCLOB/BLOB) data types.

See PeopleTools 8.53 Release Notes, My Oracle Support.

Before running the Database Configuration Wizard, verify that the `XXDDLMS.SQL` (non-Unicode) and `XXDDLMSU.SQL` (Unicode) scripts include these tablespaces (`XX` is a two-character code corresponding to the product line you are installing).

See "Creating a Database Manually on Microsoft Windows or UNIX," Editing SQL Scripts.

## Task 6B-1-7: Running the Shell Script `psconfig.sh`

The shell script `psconfig.sh` sets up the environment for Data Mover to run. The PeopleSoft Data Mover utility is used to load the database.

To run `psconfig.sh`:

1. Change the directory to `PS_HOME`.
2. Run `psconfig.sh` (`./psconfig.sh`)

## Task 6B-2: Running the Database Configuration Wizard

---

When you run the Database Configuration Wizard, Data Mover typically performs the following actions:

1. `IMPORT *`  
Create all the PeopleTools and application tables with their indexes.
2. `ENCRYPT_PASSWORD *`  
Encrypt security information for the database.
3. `CREATE_TRIGGER *`  
Create application-required triggers.
4. `REPLACE_VIEW *`  
Create PeopleSoft views.
5. `CREATE_TEMP_TABLE *`  
Create PeopleSoft temporary tables.

If Data Mover fails at any of the above steps, it will complete the rest of the steps but will not start the next step—instead the Database Configuration Wizard aborts and tells the user what file to review for the detailed error message. If Data Mover fails at step 1 or 2, it is fatal. If Data Mover fails at step 3 or 4, it is not necessarily fatal. You may continue the next step(s) manually.



To complete the database creation procedure you must supply information on various authorization IDs and passwords, including Access ID, Connect ID, Symbolic ID, and User IDs. Before beginning this procedure, review the information in the section Planning Database Creation and make a note of the authorization information for your environment. Beginning with PeopleSoft PeopleTools 8.53, the user profiles in PeopleTools demo databases are delivered disabled. During the database configuration procedure you will choose whether to enable the delivered user profiles, and how to assign passwords for the profiles. In addition, you will supply several passwords that were previously provided as defaults. Be sure to note the passwords that you supply, as they will be needed for subsequent installation procedures.

See the information on user profiles in the *PeopleTools: Security Administration* product documentation.

See "Preparing for Installation," Planning Database Creation.

**Note.** During UNIX console mode installation, you can go back to the previous steps whenever you see the instruction: Press 1 for Next, 2 for Previous, 3 to Cancel or 5 to Redisplay [1]. Choose 2 for Previous.

To run the Database Configuration Wizard:

1. Go to `PS_HOME/setup/PsMpDbInstall`.

2. Launch the installation using the command `setup.sh`:

See the chapter "Using the PeopleSoft Installer" for additional flags, or for details about running in GUI mode.

See "Using the PeopleSoft Installer," Running the PeopleSoft Installer.

3. You see the following prompt:

```
Welcome to the PeopleSoft Database Configuration Wizard 8.56
```

```
This Wizard will assist you in configuring and loading a PeopleSoft=>
database.
```

```
PRESS <ENTER> TO CONTINUE:
```

4. Press ENTER to continue.

5. Specify the location of `PS_HOME`—the high-level directory where the PeopleSoft PeopleTools software is installed—and press ENTER.

```
Please enter an installation location or press <ENTER> to accept the=>
default
```

```
(DEFAULT: [/data2/dbx/PT856]):
```

```
Press 1 for Next, 2 for Previous, 3 to Cancel or 5 to Redisplay [1]
```

6. Press ENTER to continue

7. Specify the location of `PS_APP_HOME`—the high-level directory where the PeopleSoft Application software is installed—and press ENTER.

```
Note: If you have installed PeopleSoft Applications outside PeopleTools=>
PS_HOME
```

```
then choose the PeopleSoft Applications home PS_APP_HOME, else leave=>
the default PS_HOME.
```

```
Choose the directory where you previously installed PeopleSoft=>
Applications,
```

commonly known as `PS_APP_HOME`. or press <ENTER> to accept the default =>

(DEFAULT: /ds1/dbx/PT856): **/data2/dbx/FSCM92**

Press 1 for Next, 2 for Previous, 3 to Cancel or 5 to Redisplay [1] :

---

**Note.** If the `PS_APP_HOME` is different from the `PS_HOME` then all the modified scripts will be will be created under `PS_APP_HOME\modifiedscripts`, and all the DCW logs will be created under `PS_APP_HOME\logs`.

---

8. Select whether you want to create a Unicode or non-Unicode database, and press ENTER.

For a database platform of 'DB2 for LUW', are you installing a:

```
1 - Non-Unicode Database
->2 - Unicode Database
```

To select an item enter its number, or 0 when you are finished [0] :

Press 1 for Next, 2 for Previous, 3 to Cancel or 5 to Redisplay [1] :

9. If you select a Unicode database, the character set will be DB2 Codepage 1208.

Select Character Set:

```
->1 - DB2 Codepage 1208
```

To select an item enter its number, or 0 when you are finished [0]:

10. If you select a non-Unicode database, you see the following prompts:

- a. Select the character set.

Select Character Set:

```
->1- Western European ISO 8859-1
2- Western European ISO 8859-15
3- Microsoft CP1252
```

To select an item enter its number, or 0 when you are finished [0]:

- b. Specify the territory; for example, US.

Please refer to the DB2 LUW reference manual section on 'Supported=> territory codes and code pages'

Specify the new Database TERRITORY\* to use (DEFAULT: US):

To select an item enter its number, or 0 when you are finished [0]:

---

**Note.** Consult the DB2/LUW reference manual section on "Supported territory codes and code pages" for information on territory identifiers and code sets.

---

11. The Database Configuration Wizard detects which database files are available for loading. Select the appropriate PeopleSoft database type to load and press ENTER to continue.

You will only see the database types that are valid based on the PeopleSoft application modules that you have installed.

Database Create Type:

```
->1- Demo
```

2- System

To select an item enter its number, or 0 when you are finished [0] :

To select an item enter its number, or 0 when you are finished [0] : **1**

Database Create Type:

1- Demo

2- System

To select an item enter its number, or 0 when you are finished [0] : **0**

Press 1 for Next, 2 for Previous, 3 to Cancel or 5 to Redisplay [1] :

---

**Note.** See the manual database creation chapter for further details about PeopleSoft database types.

---

12. Select the PeopleSoft application database you want to load, pressing ENTER when you are done. (The available selections will depend upon which application software you have installed.)

Select PeopleSoft Application:

->1- PeopleSoft Database - US English

To select an item enter its number, or 0 when you are finished [0] : **0**

Press 1 for Next, 2 for Previous, 3 to Cancel or 5 to Redisplay [1] :

If you installed the Multilanguage software, each application will be listed several times, once for each language. If you are installing languages other than English, make sure to select the appropriate language data files for each application you select in English. This will load the translated database objects.

See "Preparing for Installation," Planning Multilingual Strategy.

If you are installing an application in any language other than English, you must also select the English component of the application. For example, for Financials/Supply Chain Management if you select Fin/SCM - French, you must also select Fin/SCM - US English. This ensures that you install the necessary base-language components.

13. Select whether to configure a server and create a database, or whether to create a database in an existing server. Then press ENTER.

Configure Server

->1 - Configure a server and create database  
 2 - Create database on existing server

To select an item enter its number, or 0 when you are finished [0]: **2**

Which options you choose tells PeopleSoft Database Configuration Wizard whether to run the dbmcfg.sql script in addition to creating a PeopleSoft database. The dbmcfg.sql script updates the default DB2 instance with the PeopleSoft recommended value.

If you select Configure a server and create database, you see a message that the DB2 instance needs to be recycled for the PeopleSoft recommended parameters to take effect at the instance level. If you select Create database on existing server, the dbmcfg.sql does not get executed, which in turn does not require the DB2

instance to be recycled. This implies that the DB2 instance is already configured at a minimum with the PeopleSoft recommended values and satisfy the prerequisites.

14. Enter the requested database server information, pressing ENTER after typing each value.

---

**Note.** Whatever you type as your password will not be displayed—for example, connect ID password and database owner/access password requirement.

---



---

**Note.** To grant access to a PeopleSoft user ID the PeopleSoft sign-on process uses a connect ID, which is defined in the database and has minimum privileges that allow it to select only on some security tables. After the access has been granted, the PeopleSoft security will control the access for a PeopleSoft user ID to the application objects. The use of a common connect ID for multiple PeopleSoft IDs simplifies database security maintenance.

---



---

**Note.** Because the PeopleSoft Database Configuration Wizard goes through the whole process of creating the database as well as launching Data Mover to load the database with PeopleSoft objects, the task requires certain information for Data Mover to be able to connect to and populate the database.

---

Database Name [PTDB]: **FSDMO**

Access ID [sa]:

Access Password []:

Peoplesoft connect ID [people]:

Peoplesoft connect password []:

Press 1 for Next, 2 for Previous, 3 to Cancel or 5 to Redisplay [1]

- *Database Name:* PeopleSoft database names must be eight characters long or less and must be UPPERCASE.
- *Access ID:* This is the PeopleSoft Access ID defined in the chapter "Preparing for Installation" under Creating PeopleSoft IDs. This value is case sensitive and must be eight characters or less. You will use it later in this chapter to sign on to Data Mover in "bootstrap mode."
- *Access ID Password:* This is the PeopleSoft Access Password defined in the chapter "Preparing for Installation" under Creating PeopleSoft IDs. You will use this value later in this chapter to sign on to Data Mover in "bootstrap mode." The Access ID password must be a minimum of 8 characters.
- *Connect ID:* This is the user ID that is used for the initial connection to the database. The use of Connect ID is now mandatory. This is the PeopleSoft Connect ID defined in the chapter "Preparing for Installation" under Creating PeopleSoft IDs. Limit this to eight characters or less.
- *Connect ID Password:* This is the Connect ID password used to authenticate the Connect ID, as defined in the chapter "Preparing for Installation" under Creating PeopleSoft IDs. The Connect ID password must be a minimum of 8 characters.

15. Indicate where the database will be created and where the tablespace will be created, and press ENTER to continue.

---

**Note.** In PeopleSoft PeopleTools 8.50 and later, PeopleSoft databases running on the DB2/LUW platform can take advantage of the IBM DB2 Auto-Resize option for tablespaces. The auto-resize option creates a tablespace that automatically increases its size, in configurable increments, to accommodate increase in data volume. Note, however, that you cannot measure the total size of the system database with Auto-Resize on.

---

---

**Important!** Disabling Auto Resize (selecting *2-No* in the prompt below) can cause a Tablespace "out-of-space" error condition during database creation.

---

Please enter DB2 UDB server information

Please specify the Directory where the database will reside.

[/data1/db2udb1/PT856SYSdmodata] **/data1/dbx/PT856**

Please specify the Directory where the table space will be created.

[/data1/psdb2/PT856SYS] **/data1/db/PT856**

Auto Resize

->1 - Yes

2 - No

To select an item enter its number, or 0 when you are finished [0] :

#### 16. Specify the Application Server User ID and password.

The Appserver user has privileges to start or shut down the Application Server domain. It is also used during the Application Server configuration. Enter one of the delivered PeopleSoft user IDs.

Please enter the Appserver User and Password for your database.

Appserver User []: PTDMO

Password []:

Re-type Password []:

Press 1 for Next, 2 for Previous, 3 to Cancel or 5 to Redisplay [1] :

Please enter the Appserver User and Password for your database.

Appserver User []: VP1

Password []:

Re-type Password []:

Press 1 for Next, 2 for Previous, 3 to Cancel or 5 to Redisplay [1] :

#### 17. Specify the Web server user ID and password.

Please enter the Webserver User and Password for your database.

Webserver User : PTWEBSERVER

Password []:

Re-type Password []:

Press 1 for Next, 2 for Previous, 3 to Cancel or 5 to Redisplay [1] :

The default Web server user in the prompt is PTWEBSERVER. The Web Server user ID, also referred to in this documentation as Web Profile User ID, is used to access the web profile information from the database through the Application Server Jolt service.

18. Choose whether to enable or disable other user profiles in the database.

Choose whether to enable or disable all other user profiles in your⇒ database.

1- Disable  
-> 2- Enable

To select an item enter its number, or 0 when you are finished [0] :

- Select the Enable option to leave the User profiles (other than the Application Server User Profile and Web server User profiles specified in the previous steps) unchanged.
- Select the Disable option to disable all the User profiles in the database except the Application Server User Profile and Web server User profiles specified in the previous steps.

19. Select an option to set User profile passwords.

Choose whether to set the password same as the OPRID (user) or a⇒ different password (a global password, same for all OPRIDs).

1- Set the password same as OPRID  
-> 2- I would like to set a different password

To select an item enter its number, or 0 when you are finished [0] :

- Select the option "Set the password same as OPRID" to specify a password that is the same as the User ID (for example, VP1/VP1).
- Select the option "I would like to set a different password" to set a common global password for all the User profiles in the database in the next step.

20. If you selected the option "I would like to set a different password", specify (and re-enter) a password for all other user profiles except the Application Server User Profile and Web server User profiles specified in the previous steps of this procedure.

Enter a password that you want to set for all other user profiles.

Password []:

Re-type Password []:

Press 1 for Next, 2 for Previous, 3 to Cancel or 5 to Redisplay [1]

21. Select the base language (the default is US English) and press ENTER.

Select Base Language:  
->1 - ENG - US English

To select an item enter its number, or 0 when you are finished [0]: 0

Press 1 for Next, 2 for Previous, 3 to Cancel or 5 to Redisplay [1]

The Select base language selection is used to determine what primary base language the customer wants to run their PeopleSoft application on. If you choose a language other than English, the base language will be swapped during the database creation script.

See "Preparing for Installation," Planning Multilingual Strategy.

This step applies only if your users will be operating PeopleSoft applications primarily in one particular language other than English. This step gives a performance boost to the language you designate as the base language, but would require more administrative overhead than leaving English as the base language does.

See *PeopleTools: Global Technology*.

22. You see a confirmation dialog indicating the selected database configuration.

*For a Non-Unicode database:*

Peoplesoft Database Configuration will be installed in the following⇒  
location:

Pre-Installation Summary  
-----

Please Review the Following Before Continuing:

Product Name:

Peoplesoft Database Configuration

Install Folder:

/data2/dbx/PT856

Apps Install Home:

/data2/dbx/FSCM92

Database Platform:

DB2 UDB for Unix, NT - Non-Unicode

Application:

PeopleSoft Database - US English

Database Name:

FSDMO

Please type 'back' to go to previous panels

PRESS <ENTER> TO CONTINUE:

*For a Unicode database:*

Pre-Installation Summary  
-----

Please Review the Following Before Continuing:

Product Name:

Peoplesoft Database Configuration

Install Folder:

/data2/dbx/PT856

Apps Install Home:

/data2/dbx/FSCM92

```

Database Platform:
  DB2 UDB for Unix, NT - Unicode

Application:
  PeopleSoft Database - US English

Database Name:
  FSDMO
Press 1 for Next, 2 for Previous, 3 to Cancel or 5 to Redisplay [1]

```

23. Press ENTER. Now the PeopleSoft Database Configuration Wizard copies the necessary files over to the modified scripts directory and modifies them.

```

Creating uninstaller...
Create directory for table space if not exists

Execute Createdb-95.sql for Db2 UDB ... [for non-Unicode]

Execute Createdbu.sql for Db2 UDB ... [for Unicode]

Execute ALTRDB.SQL for Db2 UDB ...

Execute createbpu.sql for Db2 UDB ...[for Unicode]

Create table space for Db2 UDB ...

Execute DBOWNER.SQL for Db2 UDB ...

Executing dbsetup.dms for DB2 UNIX

  Initializing Data Mover ... please wait

```

24. If the Database Configuration Wizard executed successfully, you see the following message, and you can press ENTER to exit.

```

=====
Installation Complete
-----

Congratulations. Peoplesoft Database Configuration has been⇒
successfully installed to:

/data2/dbx/PT856

```

## Task 6B-3: Changing the Location of the DB2/LUW Database Log Files

---

The CREATE DATABASE command in the createdb-95.sql or createdbu.sql script creates the database with the default log files located in a subdirectory called SQLOGDIR under the directory created for the database. If the default location is not appropriate, follow these steps:

To change the location of log files:

1. Connect to the newly created database.



2. Issue the following DB2 command:

```
db2 UPDATE DB CFG FOR <db2-database-name> USING NEWLOGPATH <dir-name>
```

where <db2-database-name> refers to the newly created PeopleSoft database from the previous task, Running the Database Configuration Wizard, and <dir-name> is the location where you want the new log files to be located.

## **Task 6B-4: Checking the Log Files and Troubleshooting**

---

This section discusses:

- Checking the Log Files
- Running Data Mover
- Troubleshooting
- Improving Performance

### **Task 6B-4-1: Checking the Log Files**

After the Database Configuration Wizard finishes its execution, look for all log output in the *PS\_HOME/log* directory. Open all the log files. There is a log file for each of the steps that the Database Configuration Wizard carries out—importing, encrypting passwords, creating triggers, replacing views, and creating temp tables. *None should contain error messages.*

### **Task 6B-4-2: Running Data Mover**

If the Database Configuration Wizard does not complete successfully, you must run Data Mover manually, using one of the following methods.

On UNIX, run *PS\_HOME/bin/psdmtx* from the command line.

If you use the access ID that you specified during the database configuration to log on, you log on in "bootstrap mode." When you start Data Mover in bootstrap mode, the word "BootStrap" appears in the Data Mover status bar.

If you use a valid PeopleSoft Operator ID, such as PS for Human Capital Management or VP1 for Financials/Supply Chain Management, you log on in "user mode." In this mode, no designation appears in the Data Mover status bar.

To run Data Mover on the command line:

---

**Note.** You can run *psdmtx* by supplying arguments on the command line, or by passing the arguments from a text file. This section describes the text file method.

---

1. Go to *PS\_HOME/bin*.

```
cd $PS_HOME/bin
```

2. Use the following command to view the help for `psdmtx`:

```
$ psdmtx /help
Usage:  psdmtx  [-CT DB2|DB2ODBC|DB2UNIX|MICROSFT|ORACLE]
          [-CS server name]
          [-CD database name]
          [-CO user id]
          [-CP user passwd]
          [-CI connect id]
          [-CW connect id passwd]
          [-I process instance]
          [-FP filename]

          or
psdmtx  [parmfile]
```

To capture the output in a file, use a greater-than symbol ("pipe", >) followed by a filename. For example:

```
psdmtx [arguments] > filename.txt
```

Use the following list of commands and descriptions for the `psdmtx` arguments:

Command Argument	Description
-CT <DB type>	The type of database to connect to. The valid values are: DB2 and DB2UNIX.
-CD <DBNAME>	Your selected Database Name.
-CO <ACCESSID>	Use the <DBNAME> Access ID to run Data Mover in bootstrap mode.
-CP <ACCESSPWD>	The password for <DBNAME> Access ID.
-CI <CONN ID>	The ID used to connect to the database server.
-CW <CONN PSWD>	The password for the specified connection ID.
-FP <filename>	The filename for the Data Mover import script (DMS) to run.

3. To set up Data Mover to rerun the Data Mover import script in bootstrap mode, do the following:
  - a. Change directory to `PS_HOME/setup`.
  - b. Copy `parmfile` to `parm<DBNAME>`. For example, `parmPT856`.
  - c. Edit `parm<DBNAME>`.

Use the information in the table above to edit the file for your configuration.

Use DB2UNIX for <DB type>.

For example:

*Before*

```
-CT <DB type> -CD <DBNAME> -CO <ACCESSID> -CP <ACCESSPWD> -CI <CONN=>
ID> -CW=>
```

```
<CONN PSWD> -FP <filename>
```

*After*

```
-CT DB2UNIX -CD HRDMO -CO HRDMO -CP HRDMO -CI people -CW people -FP⇒
$PS ⇒
HOME/scripts/pt856dbx.dms
```

4. To launch Data Mover in bootstrap mode, do the following:

- Change directory (cd) to *PS\_HOME/bin*
- Run the `psdmtx` command with the edited `parm<DBNAME>` file.

```
pt-sun20:$ psdmtx ../setup/parmPT856
```

You see Data Mover log messages tracking the progress.

## See Also

*PeopleTools: Data Management*

## Task 6B-4-3: Troubleshooting

If the Database Configuration Wizard did not complete successfully, read this troubleshooting information. If your script has stopped midway (this can happen for a number of reasons) you need to edit the Data Mover script generated automatically by the Database Configuration Wizard and restart Data Mover manually. The Data Mover script files have the extension `.dms` and are sometimes referred to as "DMS scripts."

The generated Data Mover import script is saved in the *PS\_HOME/scripts* directory. The script conforms to the following naming convention:

```
<dbname>dbx.dms
```

If the Database Configuration Wizard fails while creating views, clear the cache folder, for example, *USER\_HOME/PS\_CACHE*, and repeat the database creation.

See the information on startup settings in PeopleSoft Configuration Manager in the *PeopleTools: System and Server Administration* product documentation.

If running a script results in an SQL error, it may be because the `PS.PSDBOWNER` table contains duplicate rows, an invalid user ID is specified, or the Owner ID column in the `PSLOCK` table is specified in uppercase or is incorrect. If this is the case fix `PS.PSDBOWNER`.

To edit and restart the DMS script:

1. Determine the record that was being imported (that is, which `IMPORT` command was running) when the script stopped, and use the following guidelines to edit and rerun the DMS scripts.

When building a DMO database or a multilingual database, adding the `SET START` statement can be tricky because the Data Mover script used to load the database will include more than one `IMPORT` statement. The key is to view the log files and determine which `IMPORT` section of the script Data Mover failed on.

- If the failure occurred during the first `IMPORT` statement, add the `SET START` statement before the first `IMPORT *; statement`.
- If the failure occurred during a subsequent `IMPORT` statement, comment out all statements preceding the `IMPORT *; statement` where the failure occurred and add the `SET START` statement before the `IMPORT *; statement` of the section in which the failure occurred.
- *This is very important:* If you see any "unique index constraint" error messages in the "Building required

indexes" section, your IMPORT script failed during a subsequent IMPORT but the SET START statement was added to the first IMPORT. In this situation, you can run the Data Mover script in its originally generated form, with only one modification. In the first IMPORT section, change the statement "IMPORT \*;" to "REPLACE\_DATA \*;". This will delete all the data in the tables, and re-import it. This process will take some time to run, and you will need to separately create each of the indexes that failed.

2. Start Data Mover by running psdmtx on the command line.

See Running Data Mover.

3. Log on using the Access ID to start Data Mover in *bootstrap mode*.

The input window should display the DMS import script for the database. The script has the format <dbname>dbx.dms.

4. If necessary, select File, Open, and browse to the *PS\_HOME/scripts* directory to find the appropriate DMS script.
5. Add the following line before the offending IMPORT command (the one being executed when the failure occurred):

```
SET START <RECORD NAME>;
```

<RECORD NAME> is the name of the record that failed. Make sure to review the Data Mover log file to see where the script failed and locate the last record that imported successfully. The SET START command will begin the Data Mover import at the specified record name.

---

**Note.** It is a good idea to change the name of the log file in the script before each attempt at running it. This ensures that you have a separate log file for each attempt, if you run the import more than once.

---

For example, if the script stops and the table is partially inserted with a message similar to this one:

```
Importing PSPNLFIELD
Rows inserted into PSPNLFIELD

3000
```

First drop the partially inserted table (for example, record) by using the DROP TABLE command, and then restart Data Mover at the record that failed using the SET START command and continue the Data Mover import. This can be done in a single pass.

Add the following lines before the offending IMPORT \*; command (the one being executed when the failure occurred):

```
SET START <RECORD NAME>;
DROP TABLE <RECORD NAME>;
```

where <RECORD NAME> is the name of the record that failed. The SET START statement will begin the Data Mover import at the specified <RECORD NAME>.

*Example of the original script:*

```
REM - PeopleSoft Database - US English
/
SET LOG epengs.log;
SET INPUT epengs.db;
SET COMMIT 30000;
SET NO VIEW;
SET NO SPACE;
SET NO TRACE;
SET UNICODE ON;
```

```
IMPORT *;
```

*Example of script after modification, with changes in bold font:*

```
REM - PeopleSoft Database - US English
/
SET LOG epengs2.log;
SET INPUT epengs.db;
SET COMMIT 30000;
SET NO VIEW;
SET NO SPACE;
SET NO TRACE;
SET UNICODE ON;
SET START PSPNLFIELD;
DROP TABLE PSPNLFIELD;
IMPORT *;
```

For the DROP statement, for records with a rename without a leading PS, add PS\_ to the beginning of the rename; otherwise the table will not be found. For example, PS\_<RECNAME>.

- To restart the script, use the `psdmtx` command to execute Data Mover on the command line. See Running Data Mover.

## Task 6B-4-4: Improving Performance

The following tips can help you save time when running the Data Mover scripts:

- Run Data Mover from the fastest workstation available.
- Run Data Mover on the database server.
- Run only a single instance of Data Mover, and do not have any other applications running during the import.
- In the PeopleSoft Configuration Manager, turn off all trace options.  
Tracing during a DMS load will add considerable time to the process.
- Copy the database file over to the workstation so that Data Mover can access it locally instead of over the network.
- Run Data Mover on the database server with the `.db` or `.dat` file located locally.

If you are comfortable changing the options available for a DB2/LUW instance and database, you might consider "tuning" the instance and database used for the import. Some of these options are appropriate only during the import, so you may not want to keep them in effect after the import is complete.



## Chapter 7

# Completing the Database Setup

This chapter discusses:

- Selecting the Necessary Tasks to Complete the Database Setup
- Reviewing Patch Application
- Updating Database to Latest PeopleTools Release
- Running Additional Data Mover Scripts
- Cleaning Up Orphaned Language Data
- Running VERSION Application Engine Program
- Running SQR Reports
- Checking the Database
- Running SETSPACE.SQR
- Running Alter Audit

## **Selecting the Necessary Tasks to Complete the Database Setup**

---

Review each of the tasks in this chapter to determine which are required for your database setup. Depending upon the details of your installation you may not need to complete every task. However, it is important to evaluate the tasks with respect to your specific situation.

## **Task 7-1: Reviewing Patch Application**

---

The section Reviewing Patches and Updates Required at Installation in the first chapter of this documentation instructed you to search the My Oracle Support Patches & Updates area for Required for Install patches for PeopleSoft PeopleTools and your PeopleSoft application.

See "Preparing for Installation," Reviewing Patches and Updates Required at Installation.

The patch user documentation, which is included with the files that you download from My Oracle Support, specifies whether the patch includes database changes. The type of patch you are applying may affect how you proceed with the tasks in this chapter.

- If you meet *both* of the following listed requirements, skip the task Updating Database to Latest PeopleTools Release, and continue with the task Running Additional Database Mover Scripts:
  - You are installing a database delivered on PeopleSoft PeopleTools 8.56.
  - You are applying a Required for Install PeopleSoft PeopleTools patch.Follow the directions in the patch user documentation to apply the database changes.
- Complete the task Updating Database to Latest PeopleTools Release, and proceed to review and carry out the

tasks following it if:

You are installing a PeopleSoft Application system (SYS) or demo (DMO) database that is *not* delivered on PeopleSoft PeopleTools 8.56. The task includes a step to apply the patch database changes.

See Understanding Database Updates for information on determining the delivered version of PeopleSoft PeopleTools.

## **Task 7-2: Updating Database to Latest PeopleTools Release**

---

This section discusses:

- Understanding Database Updates
- Cleaning Up Data
- Deleting Object Permission Data
- Deleting Performance Monitor System Default Data
- Creating the PSIMAGE2, PSIMAGE2IDX, and PSIMAG2LOB Tablespaces
- Updating PeopleTools System Tables
- Updating Select PeopleTools Database Objects
- Deleting Select PeopleTools Database Objects
- Updating Select PeopleTools Patch Database Objects
- Merging the PeopleTools Projects
- Altering PeopleTools Tables
- Updating PeopleTools Database Objects
- Deleting Obsolete PeopleTools Database Objects
- Applying Patched PeopleTools Database Objects
- Migrating Records to New Tablespaces
- Updating PeopleTools System Data
- Running PeopleTools Conversions
- Converting Integration Broker
- Running Additional PeopleTools Conversions

### **Understanding Database Updates**

Your PeopleSoft application database may be on a PeopleSoft PeopleTools release prior to the version that you are currently running. For you to be able to sign on to your database after running the Data Mover script to load your database, the PeopleSoft PeopleTools versions for your database and your file server must match. The steps in this task ensure that your PeopleSoft database is in sync with the PeopleSoft PeopleTools version that you are running.

---

**Note.** You will use Application Designer for several steps in this portion of the installation. Consult the Application Designer documentation if you have questions.

---

See *PeopleTools: Application Designer Developer's Guide*



---

**Note.** If you are installing a database delivered on PeopleSoft PeopleTools 8.56, and you are applying a required for install PeopleSoft PeopleTools patch, skip the steps in this task. Instead, follow the directions in the patch user doc to apply the database changes, and then continue with the install at the task Running Additional Data Mover Scripts. If you are installing an application SYS or DMO database that is not delivered on PeopleSoft PeopleTools 8.56, please proceed with this task.

---

This task must be run for any applications where the PeopleSoft PeopleTools version of the database that was shipped is different than the version of PeopleSoft PeopleTools that you are running. To verify the PeopleSoft PeopleTools release for your application database, run this SQL query:

```
select TOOLSREL from PSSTATUS
```

If the PeopleTools version is not 8.56, you must run this task. Otherwise, continue to the task Running Additional Data Mover Scripts.

## Task 7-2-1: Cleaning Up Data

If your database is delivered on PeopleSoft PeopleTools 8.48 or higher, do *not* run this step, and instead, proceed to Deleting Performance Monitor System Default Data. If your database is delivered on PeopleSoft PeopleTools 8.47 or earlier, perform this step to clean out obsolete message data.

---

**Warning!** Performing this task when updating from PeopleSoft PeopleTools 8.48 or later will wipe out current valid data that is needed for your system to function properly.

---

Message functionality and structure changed as of PeopleSoft PeopleTools 8.48 and the old data is obsolete. Edit *PS\_HOME*\scripts\ptupgibdel.sql to delete data from the tables that only exist in the old PeopleSoft PeopleTools release. Open the script and make the following modifications, and then run the modified script using your SQL query tool:

1. Search for the string "--- End of PT8.<xx> ---" where <xx> represents the last two digits of the PeopleSoft PeopleTools release you are upgrading from.
2. Delete the entire portion of the script below this string.
3. Save the script as <PS\_HOME>\scripts\ptupgibdel8<xx>.sql where <xx> represents the last two digits of the PeopleSoft PeopleTools release you are upgrading from, as determined in Step 1.

---

**Important!** Be sure to save the script using the naming convention shown above. This will preserve the original script for use in updating other databases at different PeopleSoft PeopleTools releases.

---

4. Using a SQL query tool, run the ptupgibdel8<xx>.sql script against your PeopleSoft database.

## Task 7-2-2: Deleting Object Permission Data

If your database is delivered on PeopleSoft PeopleTools 8.55 or earlier you must run this step. Truncate the PeopleTools table PSAPPDES\_OBJ\_PERM to ensure the successful completion of your installation. Because a primary key index on this table changed in PeopleSoft PeopleTools 8.56, the data stored in this table needs to be deleted to ensure that the index can be successfully created later in the installation.

## Task 7-2-3: Deleting Performance Monitor System Default Data

If your database is delivered on PeopleSoft PeopleTools 8.54 or higher, do *not* run this step, and instead, proceed to Creating the PSIMAGE2, PSIMAGE2IDX, and PSIMAG2LOB Tablespace. If your database is delivered on PeopleSoft PeopleTools 8.45 through 8.53, perform this task to clean out obsolete message data.

---

**Warning!** Performing this task when updating from PeopleSoft PeopleTools 8.54 or later will wipe out current valid data that is needed for your system to function properly.

---

Truncate the PeopleTools table PSPMSYSDEFAULTS to ensure the successful completion of your installation. Because a primary key index was added to this table as of PeopleSoft PeopleTools 8.54, the data stored in this table needs to be deleted to ensure that the index can be successfully created later in the installation.

## **Task 7-2-4: Creating the PSIMAGE2, PSIMAGE2IDX, and PSIMAG2LOB Tablespaces**

Review the *XXDDLDM.S*.SQL (ANSI) or *XXDDLDM.SU*.SQL (Unicode) tablespace creation script that was run earlier in the install process (*XX* is a two-letter code for your product line). If the script did not include the creation of the PSIMAGE2, PSIMAGE2IDX, and PSIMAG2LOB tablespaces, create them now.

Work with your database administrator (DBA) to review, edit, and then run the *ptddlupg.sql* (ANSI) or *ptddlupgu.sql* (Unicode) script to create these tablespaces and any other missing tablespaces before continuing with the installation.

### **See Also**

"Creating a Database Manually on Microsoft Windows or UNIX," Editing Database Scripts

## **Task 7-2-5: Updating PeopleTools System Tables**

Run SQL scripts to update your PeopleSoft PeopleTools system tables to the latest PeopleSoft PeopleTools release (currently 8.56).

Use a query tool, such as the DB2 Command Center, to run SQL scripts while in the PeopleSoft database.

This procedure also includes steps to run Data Mover scripts. Depending upon the step, you run Data Mover in "bootstrap mode" or in "user mode."

See the section Checking the Log Files and Troubleshooting, Running Data Mover in the chapters on creating a database using the Database Configuration Wizard, or creating a database manually.

To update your PeopleSoft PeopleTools system tables:

1. Run the appropriate SQL scripts for your application version.

The following scripts are found in the *PS\_HOME*\scripts directory.

Use the scripts in the following table for non-Unicode databases:

<b>Application Database Version</b>	<b>Required Scripts for Non-Unicode Databases</b>
8.40	rel841, rel842, rel843, rel844, rel845, rel846, rel847, rel848, rel849, rel850, rel851, rel852, rel853, rel854, rel855, and rel856
8.41	rel842, rel843, rel844, rel845, rel846, rel847, rel848, rel849, rel850, rel851, rel852, rel853, rel854, rel855, and rel856
8.42	rel843, rel844, rel845, rel846, rel847, rel848, rel849, rel850, rel851, rel852, rel853, rel854, rel855, and rel856
8.43	rel844, rel845, rel846, rel847, rel848, rel849, rel850, rel851, rel852, rel853, rel854, rel855, and rel856
8.44	rel845, rel846, rel847, rel848, rel849, rel850, rel851, rel852, rel853, rel854, rel855, and rel856
8.45	rel846, rel847, rel848, rel849, rel850, rel851, rel852, rel853, rel854, rel855, and rel856
8.46	rel847, rel848, rel849, rel850, rel851, rel852, rel853, rel854, rel855, and rel856
8.47	rel848, rel849, rel850, rel851, rel852, rel853, rel854, rel855, and rel856
8.48	rel849, rel850, rel851, rel852, rel853, rel854, rel855, and rel856
8.49	rel850, rel851, rel852, rel853, rel854, rel855, and rel856
8.50	rel851, rel852, rel853, rel854, rel855, and rel856
8.51	rel852, rel853, rel854, and rel855, and rel856
8.52	rel853, rel854, rel855, and rel856
8.53	rel854, rel855, and rel856
8.54	rel855 and rel856
8.55	rel856
8.56	None

Use the scripts in the following table for Unicode databases:

Application Database Version	Required Scripts for Unicode Databases
8.40	rel841u, rel842u, rel843u, rel844u, rel845u, rel846u, rel847u, rel848u, rel849u, rel850u, rel851u, rel852u, rel853u, rel854u, rel855u, and rel856u
8.41	rel842u, rel843u, rel844u, rel845u, rel846u, rel847u, rel848u, rel849u, rel850u, rel851u, rel852u, rel853u, rel854u, rel855u, and rel856u
8.42	rel843u, rel844u, rel845u, rel846u, rel847u, rel848u, rel849u, rel850u, rel851u, rel852u, rel853u, rel854u, rel855u, and rel856u
8.43	rel844u, rel845u, rel846u, rel847u, rel848u, rel849u, rel850u, rel851u, rel852u, rel853u, rel854u, rel855u, and rel856u
8.44	rel845u, rel846u, rel847u, rel848u, rel849u, rel850u, rel851u, rel852u, rel853u, rel854u, rel855u, and rel856u
8.45	rel846u, rel847u, rel848u, rel849u, rel850u, rel851u, rel852u, rel853u, rel854u, rel855u, and rel856u
8.46	rel847u, rel848u, rel849u, rel850u, rel851u, rel852u, rel853u, rel854u, rel855u, and rel856u
8.47	rel848u, rel849u, rel850u, rel851u, rel852u, rel853u, rel854u, rel855u, and rel856u
8.48	rel849u, rel850u, rel851u, rel852u, rel853u, rel854u, rel855u, and rel856u
8.49	rel850u, rel851u, rel852u, rel853u, rel854u, rel855u, and rel856u
8.50	rel851u, rel852u, rel853u, rel854u, rel855u, and rel856u
8.51	rel852u, rel853u, rel854u, rel855u, and rel856u
8.52	rel853u, rel854u, rel855u, and rel856u
8.53	rel854u, rel855u, and rel856u
8.54	rel855u and rel856u
8.55	rel856u
8.56	None

2. If the application database version you are installing is either 8.42 or 8.43, run the following SQL command:

```
DROP TABLE PS_PSMCFQUEUESLANG
```

---

**Note.** PS\_PSMCFQUEUESLANG may not exist in some 8.43 application databases. Do *not* drop the table PSMCFQUEUESLANG.

---

3. If the application database you are installing is 8.45 or lower, run the following SQL command:

```
DROP TABLE PSOPTSTATUS
```

4. If the application database you are installing is 8.53, run the following SQL commands:

```
DROP TABLE PS_PTIACPTMPLTDEFN;  
DROP TABLE PS_PTIACPTMPLTSTEP;
```

5. Edit and run the `grant.sql` script in the `PS_HOME\scripts` directory. This will grant permissions to the Connect ID.
6. If the application database you are installing is 8.54 or lower, invoke Data Mover in bootstrap mode, and run the `encrypt.dms` Data Mover script in the `PS_HOME\scripts` directory.  
This will encrypt the operator passwords in your database.
7. With Data Mover still in bootstrap mode, run the `msgtlsupg.dms` Data Mover script in the `PS_HOME\scripts` directory.  
This will update the PeopleSoft PeopleTools messages in your database.
8. If you are applying a required for install PeopleSoft PeopleTools patch, invoke Data Mover in user mode and run `PS_HOME\scripts\PTPATCH.DMS`.
9. With Data Mover still in user mode, run the `storeddl.dms` Data Mover script in the `PS_HOME\scripts` directory.

---

**Note.** Comment out the other platform-specific scripts according to your platform.

---

This will update your platform-specific DDL model statements.

## Task 7-2-6: Updating Select PeopleTools Database Objects


To update PeopleSoft PeopleTools database objects to the current release you must be in Application Designer. The Copy from File functionality lets you update your PeopleSoft PeopleTools database objects from a file. You must perform this step to bring the database objects in sync with the PeopleSoft PeopleTools release. Failure to run this step will introduce problems to your environment.

To update PeopleSoft PeopleTools database objects:

1. Launch Application Designer and sign on to your database with a valid PeopleSoft user ID.
2. Select Tools, Copy Project, From File.

- In the resulting dialog box, change the import directory to *PS\_HOME*\projects, select PPLTLS84CUR from the list of projects and click the Select button.

**Note.** If the project already exists on the database, a confirmation dialog box appears asking if you want to overwrite the existing project. Select the File radio button and click OK to overwrite the existing project.

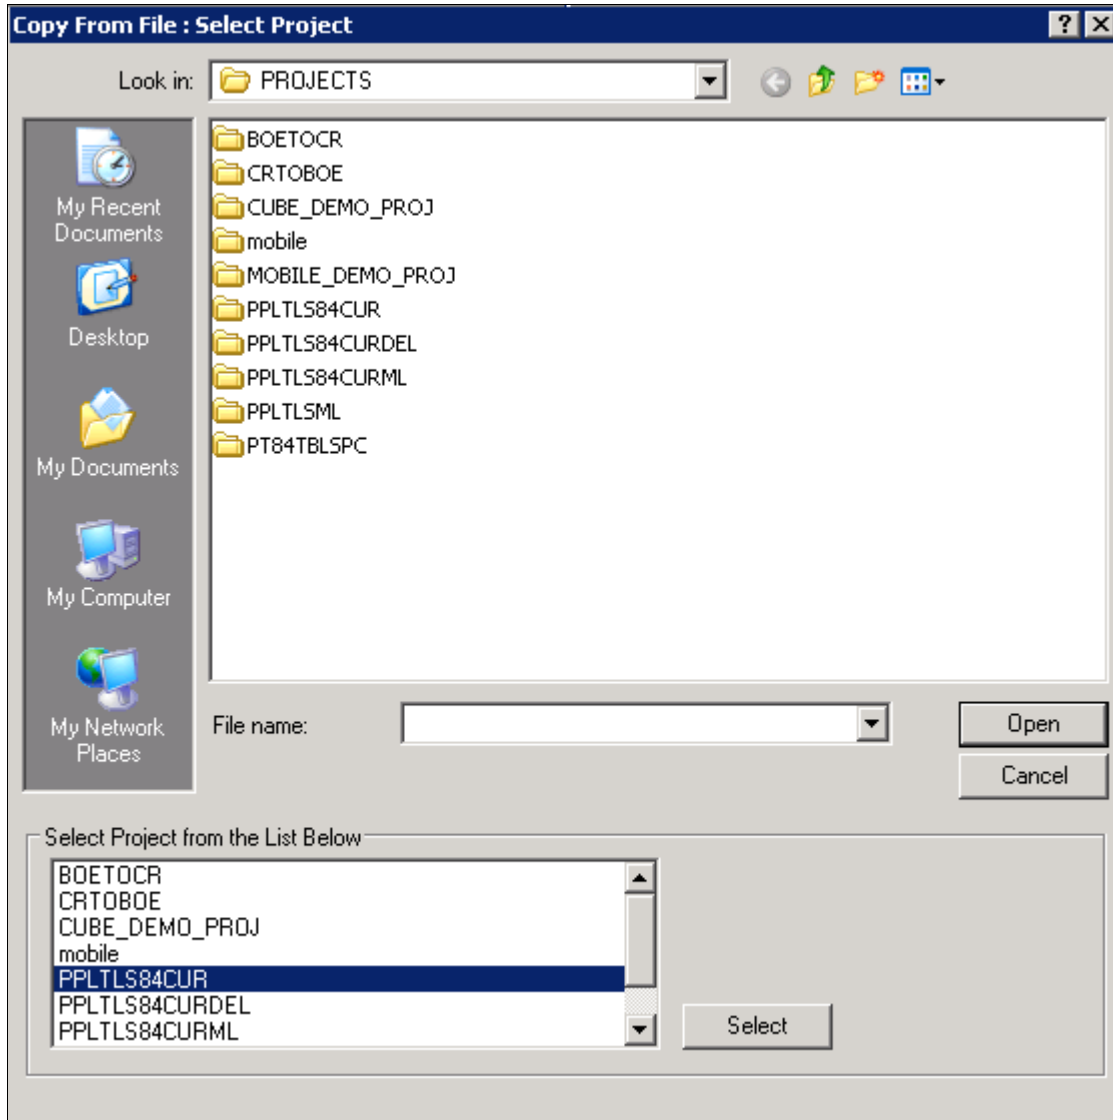

Selecting Project PPLTLS84CUR in the Copy From File dialog box


- The Copy From File dialog box appears.

Select *only* the first three object types (Records, Fields, and Indexes) in the Definition Type(s) field and then click Options.

Do not select any other object types.

5. On the Upgrade Options dialog box, select the General Options tab.

Make sure that the Keep Target Origin option is selected, as shown in this example, and click OK.

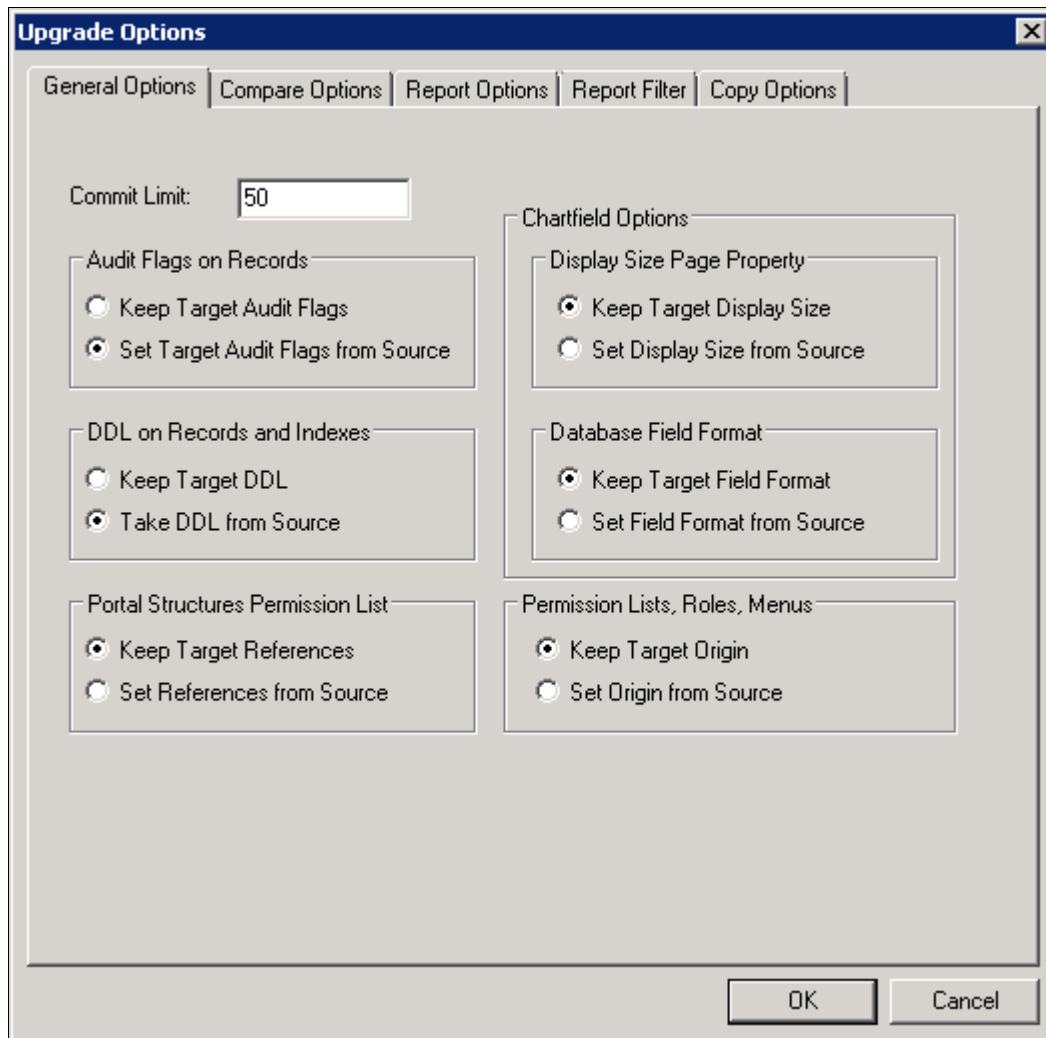

Upgrade Options dialog box: General Options page

6. On the Copy from File dialog box, click the Copy button.

When the progress window disappears, the project has been copied.

If you see the following types of messages in the output window do not worry; they are acceptable because the field label properties were copied with the object definition:

- Definition Name: OPERPSWD.OPERPSWD not copied, entire definition already copied (62,32).
- Definition Name: OPRID.NEW not copied, entire definition already copied (62,32).

## Task 7-2-7: Deleting Select PeopleTools Database Objects

This process removes obsolete PeopleSoft PeopleTools records, fields, and indexes from your database. To update PeopleSoft PeopleTools database objects to the current release you must be in Application Designer. You will use the Copy from File functionality to delete the obsolete objects from the database.

The copy process detects whether any deleted fields are in use on other objects, such as records. You may see the following kind of warning during the copy:

Field <FIELDNAME> is in use on at least one record.

You must clean up any objects that reference the deleted field(s) after the upgrade. While PeopleTools has deleted the field as part of the new release, you may still have objects that reference this deleted field. After fixing any objects that reference this field, delete the field from your system.


To delete obsolete PeopleSoft PeopleTools database objects:

1. Launch Application Designer and sign on to your database with a valid PeopleSoft user ID.
2. Select Tools, Copy Project, From File.
3. In the resulting dialog box, change the import directory to *PS\_HOME*\projects, select PPLTLS84CURDEL from the list of projects and click Select.

---

**Note.** If the project already exists on the database, a confirmation dialog box appears asking if you want to overwrite the existing project. Select the File radio button and click OK to overwrite the existing project.

---

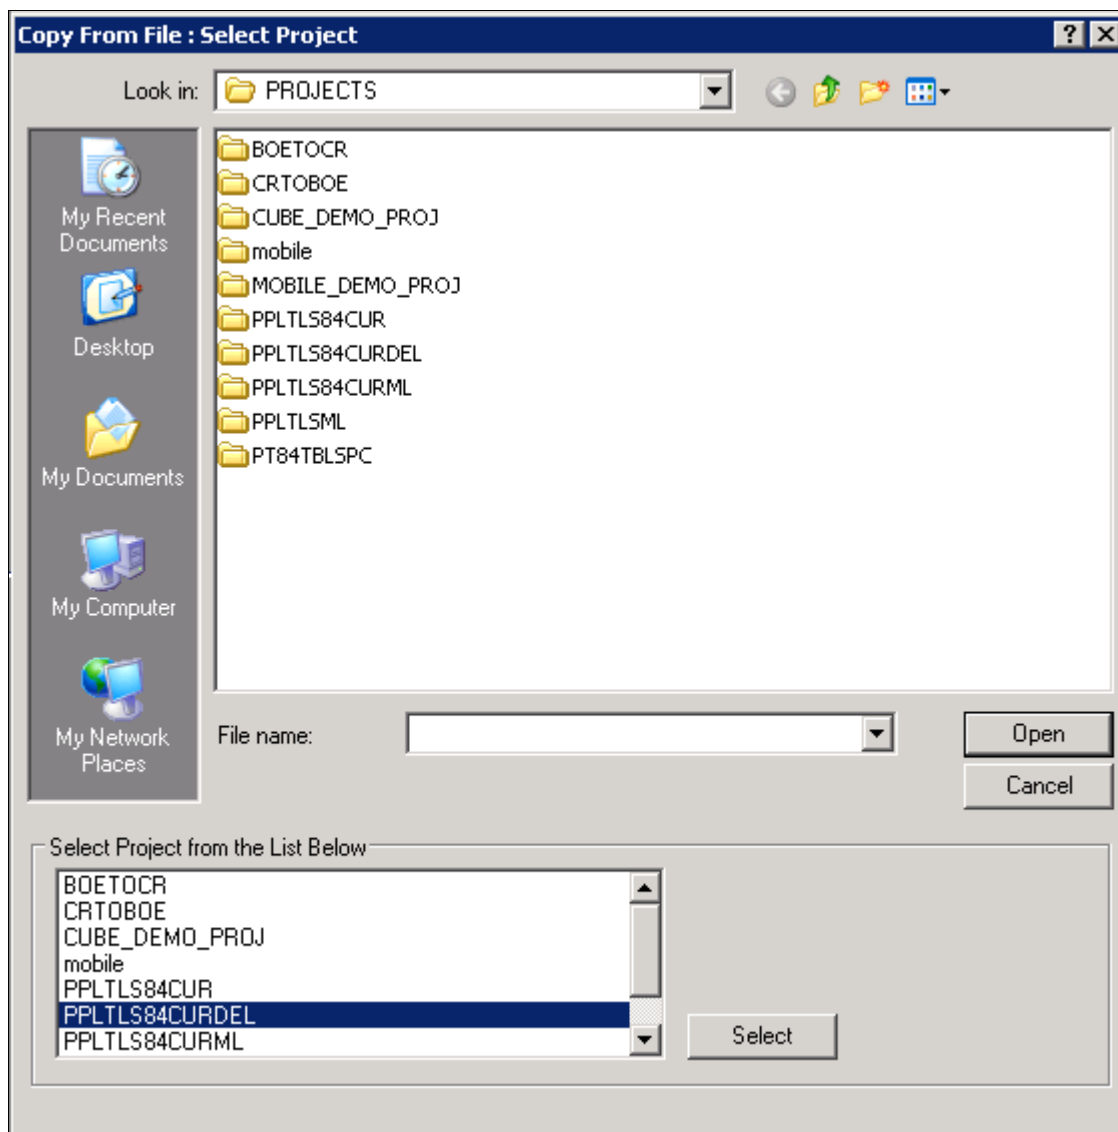

Selecting Project PPLTLS84CURDEL in the Copy From File dialog box

4. The Copy From File dialog box appears.



Select *only* the first three object types (Records, Fields, and Indexes) in the Definition Type(s) field, and then click Options.

Do not select any other object types.

---

**Note.** If you have a multilingual database, do not change the languages that are selected by default.

---

5. On the Copy from File dialog box, click Copy.

When the progress dialog box disappears, the project has been copied.

## Task 7-2-8: Updating Select PeopleTools Patch Database Objects

If you are applying a required for install PeopleSoft PeopleTools patch and *if a database project is included as part of the patch*, apply the database project now. Make sure to read the patch release notes to find out if database changes are in the patch.

To update patched PeopleSoft PeopleTools database objects to the current release you must be in Application Designer. The Copy from File functionality lets you update your PeopleSoft PeopleTools database objects from a file. You must perform this step to bring the database objects in sync with the PeopleSoft PeopleTools patch release. Failure to run this step will introduce problems to your environment.

To apply patched PeopleSoft PeopleTools database objects:

1. Launch Application Designer and sign on to your database with a valid PeopleSoft user ID.
2. Select Tools, Copy Project, From File.
3. On the Copy From File dialog box, change the import directory to *PS\_HOME*\projects, select the patch project from the list of projects and click the Select button.
4. Follow the patch instructions to select the correct copy options.

Select *only* records, fields, and indexes object types.

5. On the Copy From File dialog box, click Copy.

When the progress window disappears, the project has been copied.

## Task 7-2-9: Merging the PeopleTools Projects

In this task, you will merge the PPLTLS84CUR and PATCH856 projects definitions so that the PPLTLS84CUR project definition is updated with any new records that might have been delivered in the PeopleTools Patch.

To merge project definitions:

1. Launch Application Designer and sign on to your database with a valid PeopleSoft user ID.
2. Select File, Open.

The Open Definition dialog box opens.

3. Select Project from the Definition drop-down list, enter PPLTLS84CUR in the name dialog box, and click OK.
4. Select File, Merge Projects.
5. Enter PATCH856 in the Name dialog box, and press ENTER.
6. Select the PATCH856 project in the lower window and click Insert.
7. Click Close.

## Task 7-2-10: Altering PeopleTools Tables

Use the ALTER AUDIT process in this step to check whether the PeopleSoft PeopleTools tables are synchronized with the underlying SQL data tables in your database. This step uses a delivered project to compare the data structures of your database tables with the PeopleSoft PeopleTools tables to uncover inconsistencies. The ALTER AUDIT process then reports its findings. At this point in the installation, we expect to see differences between the database structure and the PeopleSoft PeopleTools tables. You will generate and run a SQL script to synchronize the PeopleSoft PeopleTools table definitions with the underlying tables in your database.


To alter PeopleSoft PeopleTools tables:

1. Launch Application Designer with a valid PeopleSoft user ID and sign on to the installed database.
2. Select File, Open.

The Open Definition dialog box opens.

3. Select *Project* from the Definition drop-down list, enter *PPLTLS84CUR* in the name dialog box, and click OK.
4. Select Build, Project.

The Build dialog box appears:

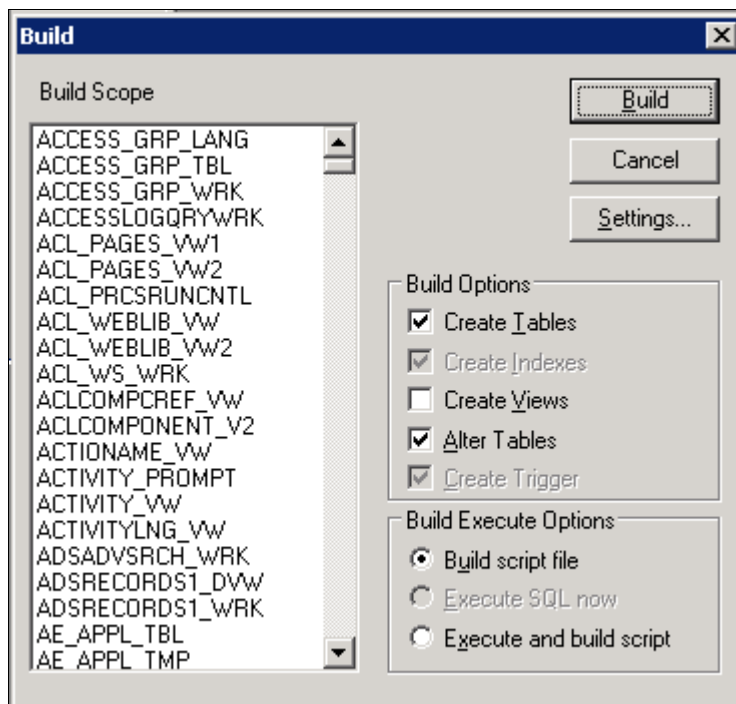


The Build dialog box with selections for altering tables

5. Select Create Tables and Alter Tables in the Build Options region as shown in the example above (Create Indexes and Create Trigger will automatically be selected).
6. Select Build script file in the Build Execute Options region.

## 7. Click Settings.

The Build Settings dialog box appears:

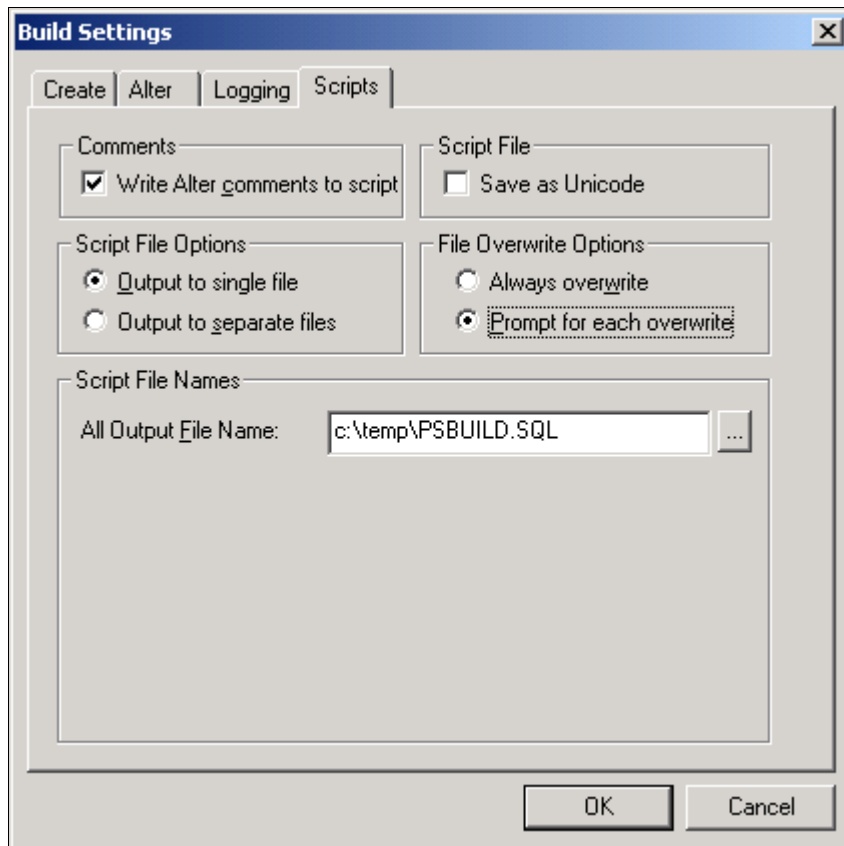


Build Settings dialog box: Scripts tab

8. Select the Scripts tab.
9. Select Write Alter comments to script.

10. Select the Alter tab and ensure that the Adds, Changes, Renames, and Deletes check boxes are selected in the Alter Any region.


The check box Drop column if data present should be selected in the Drop Column Options region, and the option Truncate data if field too short should be selected in the Change Column Length Options region.

Make sure that the option Alter by Table Rename is selected in the Alter Table Options region.

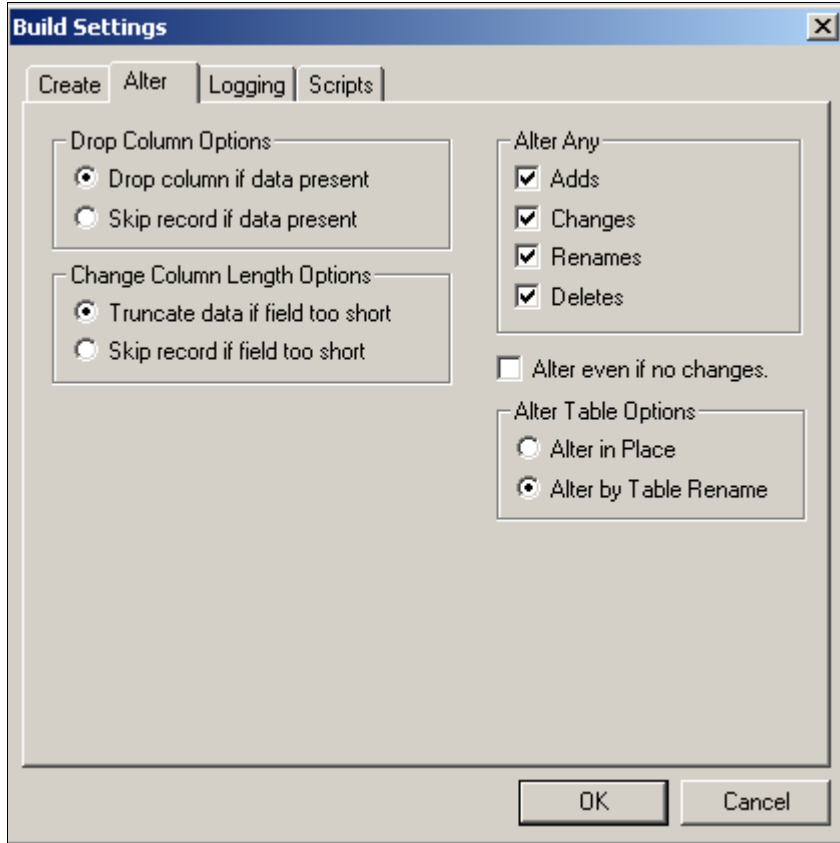

Build Settings Dialog Box: Alter tab

11. Select the Create tab and ensure that the options Skip table if it already exists, Recreate view if it already exists, and Recreate index only if modified options are selected.

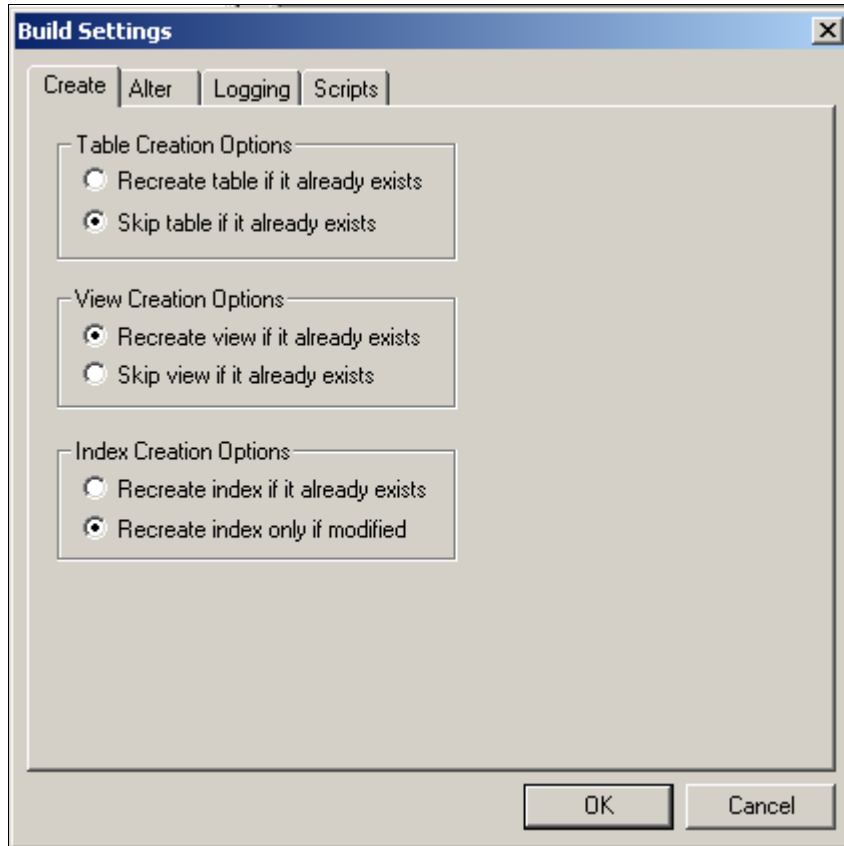

Build Settings dialog box: Create tab

12. Click OK.  
The Build dialog box reappears.
13. Click Build.
14. Click Close when the process is completed.
15. Edit the generated SQL script for the correct tablespace names and sizing parameters if you are not using delivered PeopleSoft Tablespace names.
16. Run the generated SQL script in your platform-specific query tool to bring your database structure in sync with the PeopleSoft PeopleTools tables.

## Task 7-2-11: Updating PeopleTools Database Objects


To update PeopleSoft PeopleTools database objects to the current release you must be in Application Designer. The Copy from File functionality lets you update your PeopleSoft PeopleTools database objects from a file. You must perform this step to bring the database objects in sync with the PeopleSoft PeopleTools release. Failure to run this step will introduce problems to your environment.

To update PeopleSoft PeopleTools database objects:

1. Launch Application Designer and sign on to your database with a valid PeopleSoft user ID.
2. Select Tools, Copy Project, From File.

- In the resulting dialog box, change the import directory to *PS\_HOME*\projects, select PPLTLS84CUR from the list of projects and click the Select button.

**Note.** If the project already exists on the database, a confirmation dialog box appears asking if you want to overwrite the existing project. Select the File radio button and click OK to overwrite the existing project.

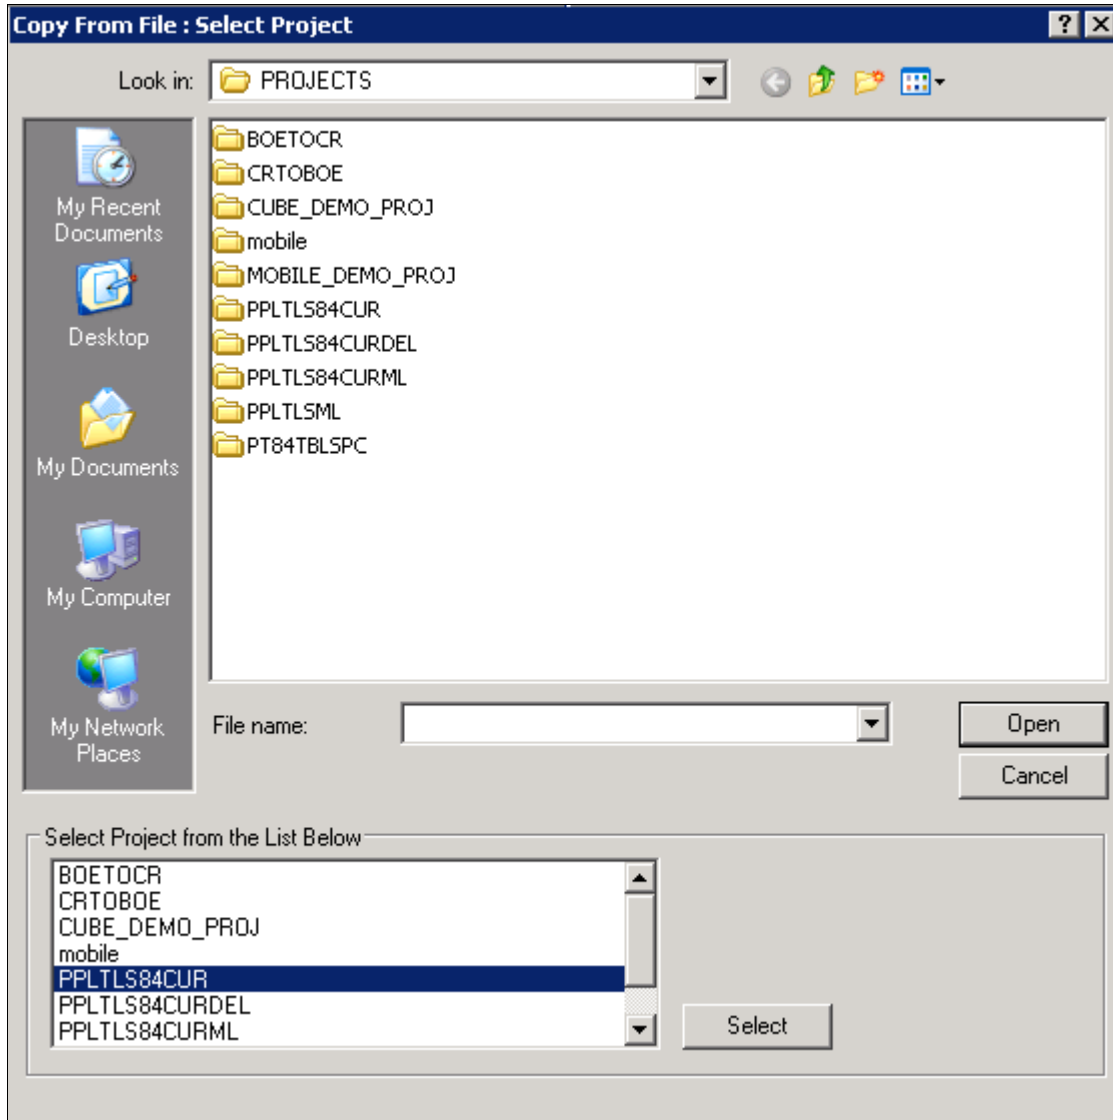


Selecting Project PPLTLS84CUR in the Copy From File dialog box

- The Copy From File dialog box appears.  
Clear (deselect) the first three object types (Records, Fields, and Indexes) in the Definitions Type(s) field. Ensure that all of the remaining object types are selected, and then click Options.

5. On the Upgrade Options dialog box, select the General Options tab.

Make sure that the Keep Target Origin option is selected, as shown in this example, and click OK.

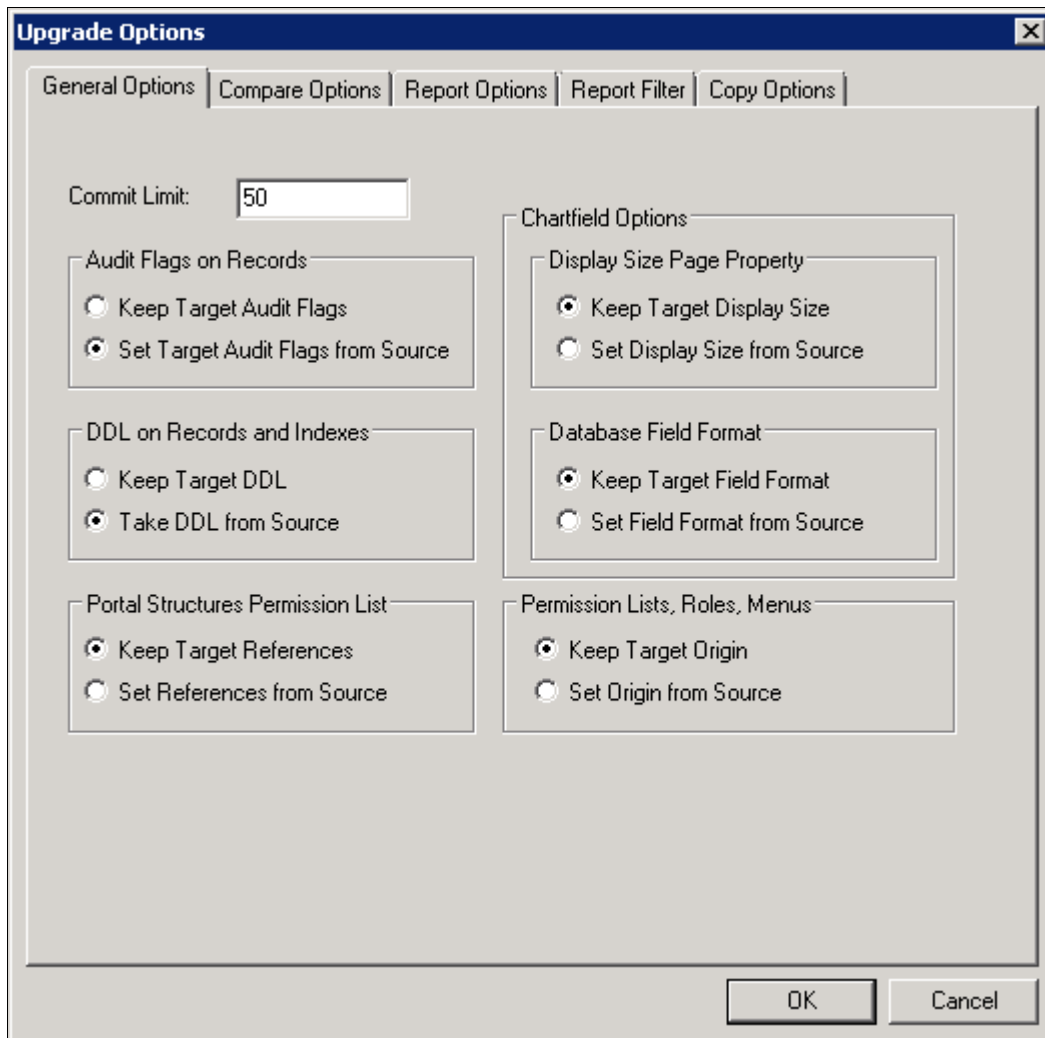

Upgrade Options dialog box: General Options page

6. On the Copy from File dialog box, click the Copy button.

When the progress window disappears, the project has been copied.

If you see the following types of messages in the output window do not worry; they are acceptable because the field label properties were copied with the object definition:

- Definition Name: OPERPSWD.OPERPSWD not copied, entire definition already copied (62,32).
- Definition Name: OPRID.NEW not copied, entire definition already copied (62,32).

## Task 7-2-12: Deleting Obsolete PeopleTools Database Objects

This process removes obsolete PeopleSoft PeopleTools objects from your database. To update PeopleSoft PeopleTools database objects to the current release you must be in Application Designer. You will use the Copy from File functionality to delete the obsolete objects from the database.

The copy process detects whether any deleted fields are in use on other objects, such as records. You may see the following kind of warning during the copy:


Field `<FIELDNAME>` is in use on at least one record.

You must clean up any objects that reference the deleted field(s) after the upgrade. While PeopleTools has deleted the field as part of the new release, you may still have objects that reference this deleted field. After fixing any objects that reference this field, delete the field from your system.

To delete obsolete PeopleSoft PeopleTools database objects:

1. Launch Application Designer and sign on to your database with a valid PeopleSoft user ID.
2. Select Tools, Copy Project, From File.
3. In the resulting dialog box, change the import directory to `PS_HOME\projects`, select PPLTLS84CURDEL from the list of projects and click Select.

**Note.** If the project already exists on the database, a confirmation dialog box appears asking if you want to overwrite the existing project. Select the File radio button and click OK to overwrite the existing project.

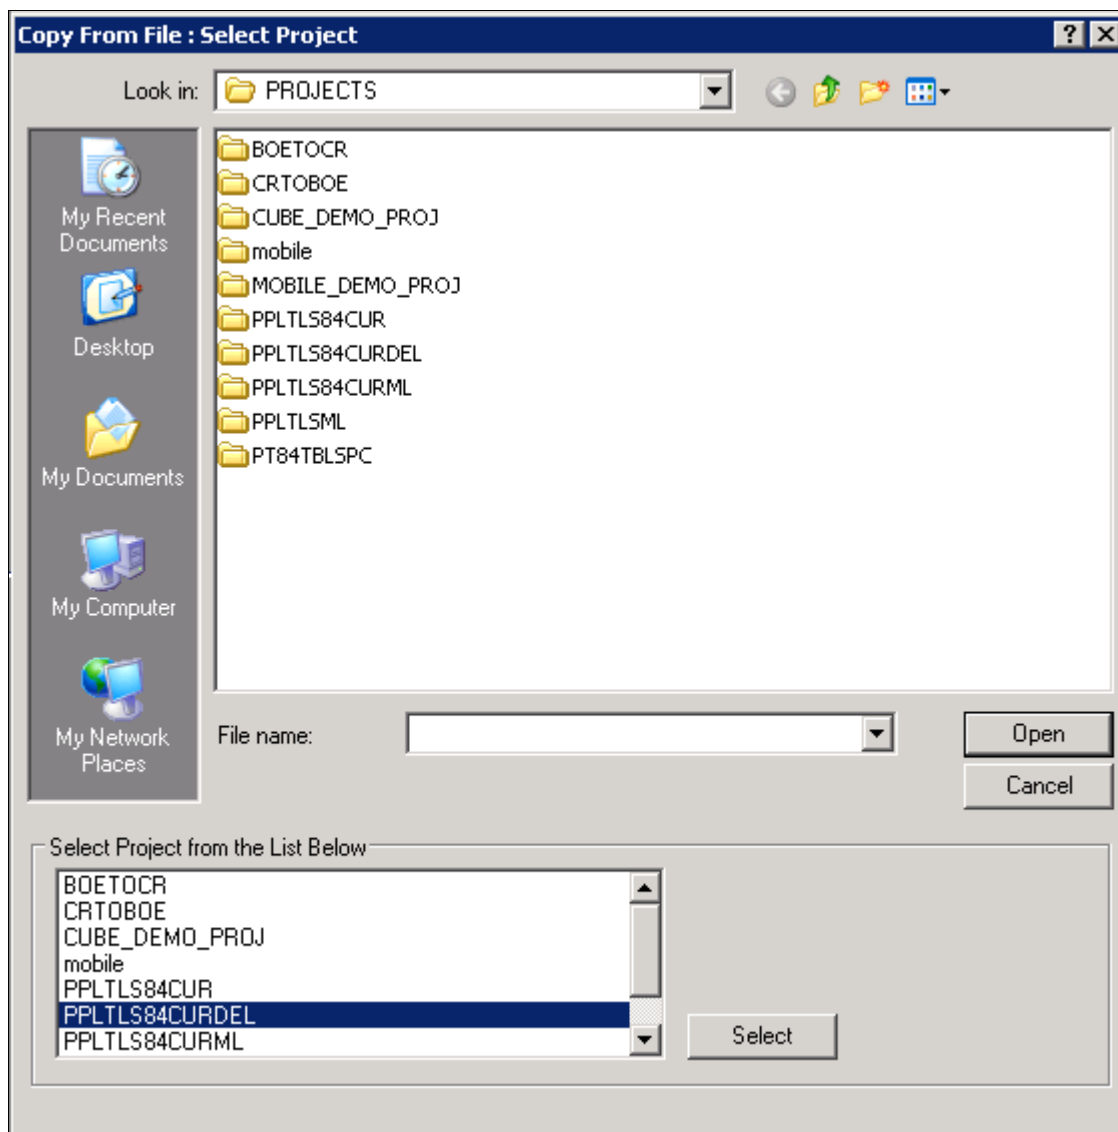

Selecting Project PPLTLS84CURDEL in the Copy From File dialog box

4. The Copy From File dialog box appears.



Clear (deselect) the first three object types (Records, Fields, and Indexes) in the Definitions Type(s) field. Ensure that all of the remaining object types are selected, and then click Options.

---

**Note.** If you have a multilingual database, do not change the languages that are selected by default.

---

5. On the Upgrade Options dialog box, select the General Options tab and make sure that the Keep Target Origin option is selected.  
Click OK.
6. On the Copy from File dialog box, click the Copy button.  
When the progress dialog box disappears, the project has been copied.

### Task 7-2-13: Applying Patched PeopleTools Database Objects

If you are applying a required for install PeopleSoft PeopleTools patch and *if a database project is included as part of the patch*, apply the database project now. Make sure to read the patch release notes to find out if database changes are in the patch.

To update patched PeopleSoft PeopleTools database objects to the current release you must be in Application Designer. The Copy from File functionality lets you update your PeopleSoft PeopleTools database objects from a file. You must perform this step to bring the database objects in sync with the PeopleSoft PeopleTools patch release. Failure to run this step will introduce problems to your environment.

To apply patched PeopleSoft PeopleTools database objects:

1. Launch Application Designer and sign on to your database with a valid PeopleSoft user ID.
2. Select Tools, Copy Project, From File.
3. On the Copy From File dialog box, change the import directory to *PS\_HOME*\projects, select the patch project from the list of projects and click the Select button.
4. Follow the patch instructions to select the correct copy options.  
Clear (deselect) the first three object types (Records, Fields, and Indexes). Ensure that all of the remaining object types are selected, and then click Options.
5. On the Upgrade Options dialog box, select the General Options tab.
6. Select the Keep Target Origin option, and click OK.
7. On the Copy From File dialog box, click Copy.  
When the progress window disappears, the project has been copied.

### Task 7-2-14: Migrating Records to New Tablespaces

This section discusses:

- Copying the Tablespace Record Project
- Running Alter Tools Tables


#### Copying the Tablespace Record Project

In every PeopleSoft PeopleTools release, Oracle moves some delivered tables to different tablespaces. You must run this step to move the tables.

To copy the Tablespace Record project:


1. Launch Application Designer and sign on to your database with a valid PeopleSoft user ID.
2. Select Tools, Copy Project, From File.
3. In the resulting dialog box, change the import directory to *PS\_HOME*\projects, select PT84TBLSPC from the list of projects, and click Select.

**Note.** If the project already exists on the database, a confirmation dialog box appears asking if you want to overwrite the existing project. Select the File radio button and click OK to overwrite the existing project.

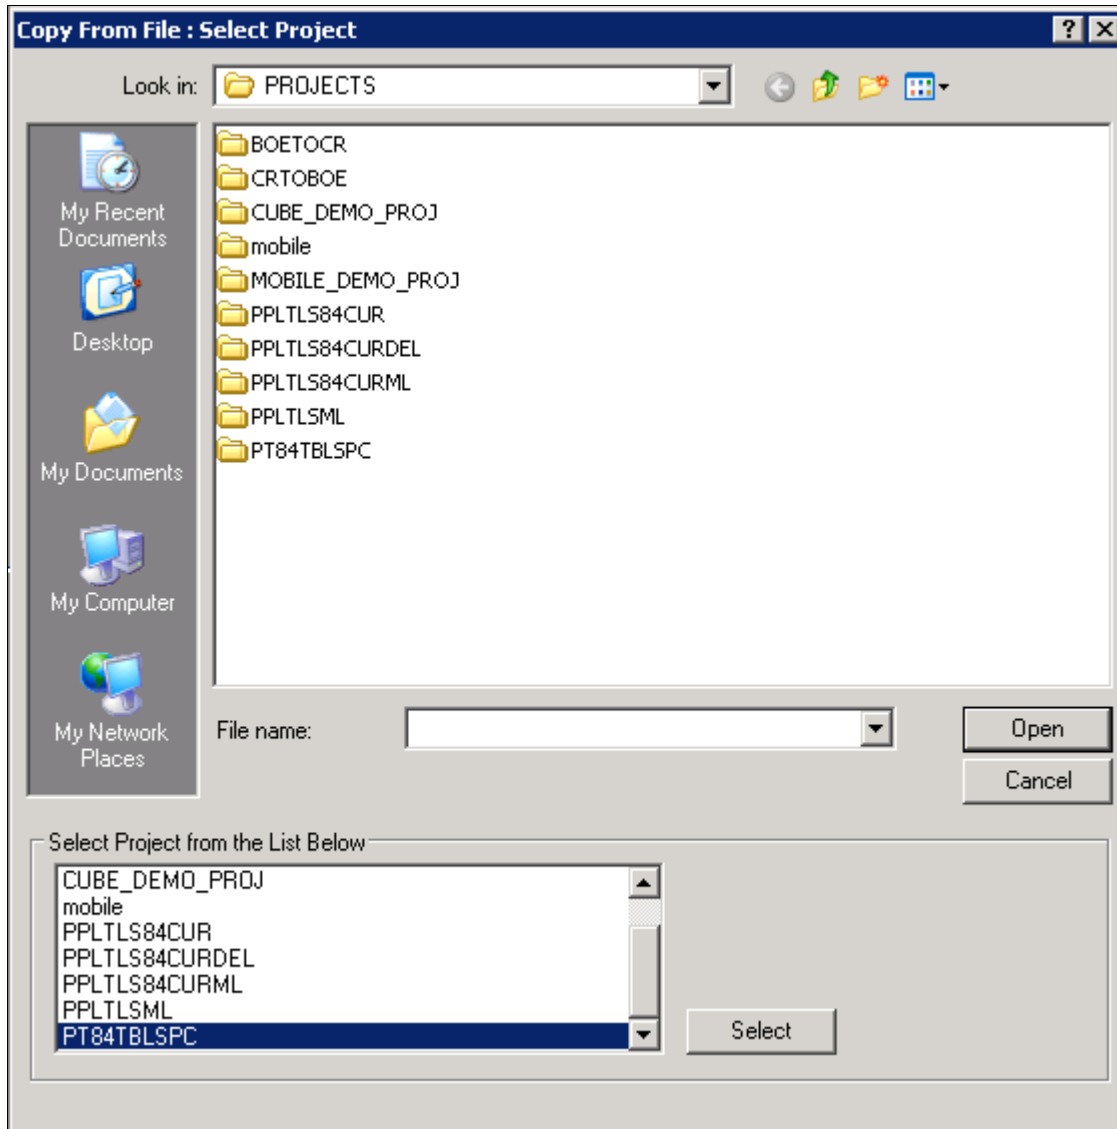

Selecting Project PT84TBLSPC in the Copy From File dialog box


4. The Copy From File dialog box appears.  
Select all object types and click the Options button.

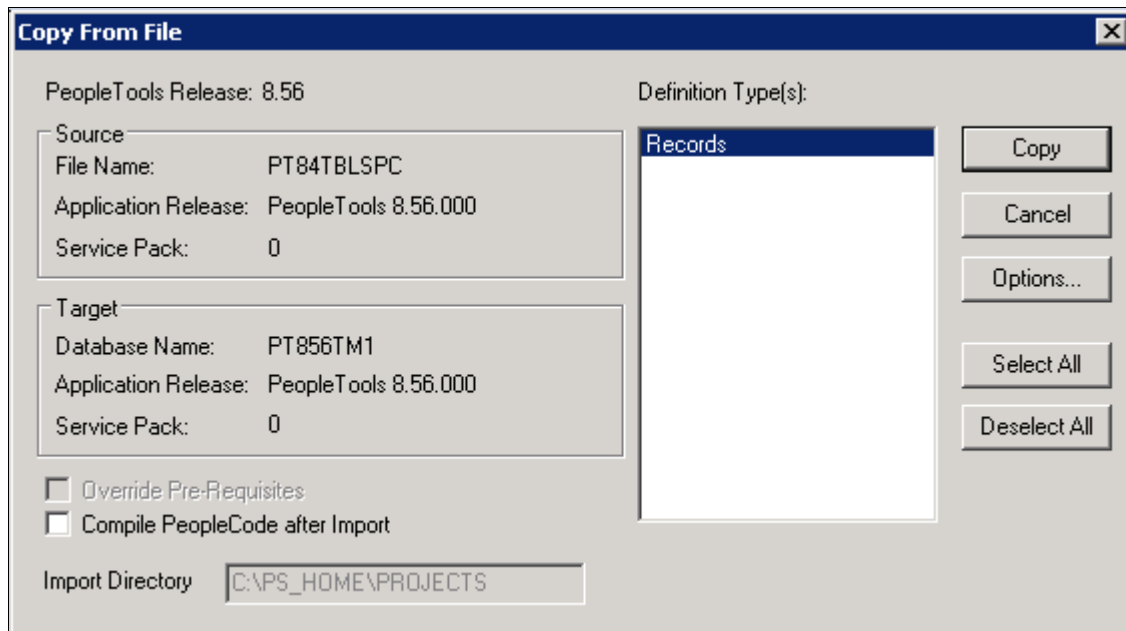

The Copy From File dialog box showing that PT84TBLSPC will be copied

- On the Upgrade Options dialog box, select the General Options tab and make sure that the Take DDL from Source and Keep Target Origin options are selected.

Click OK.

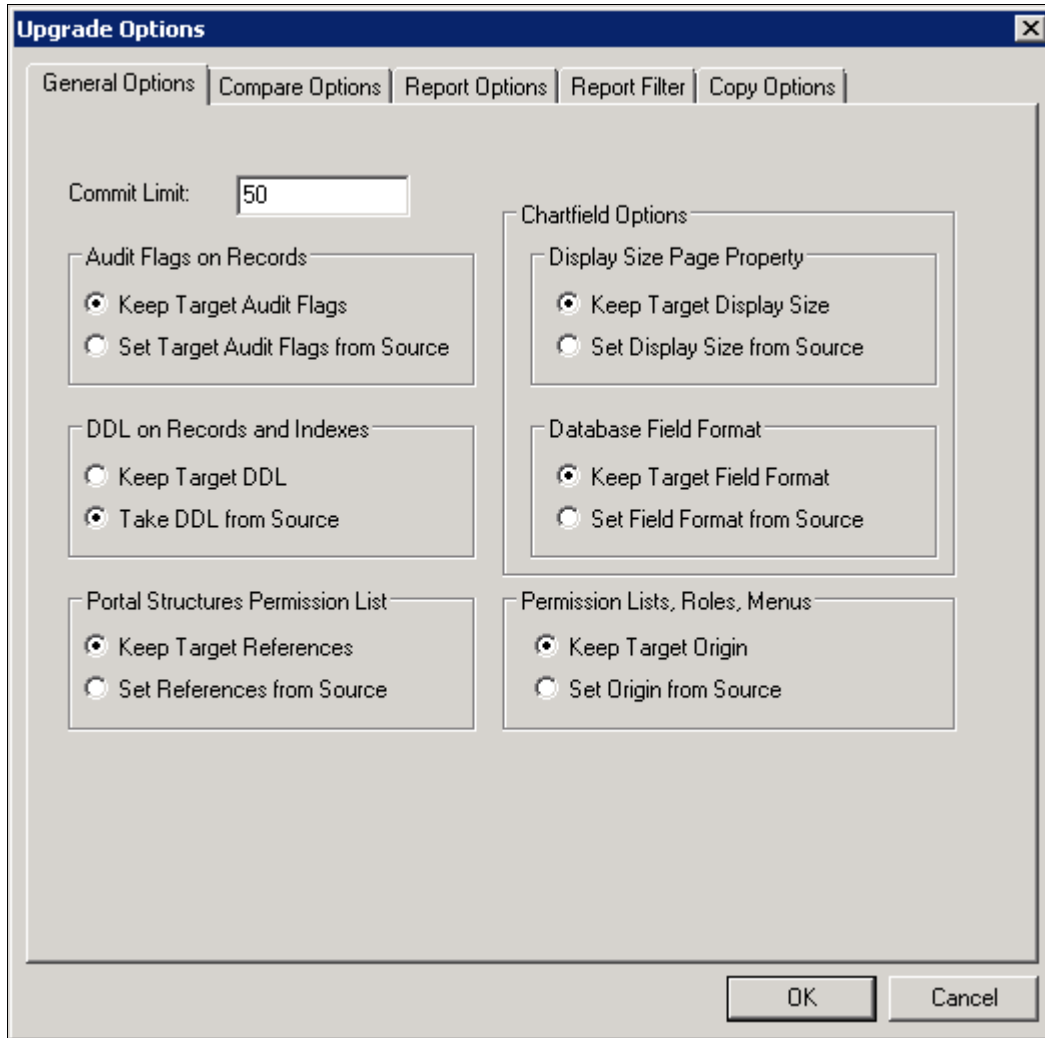

Upgrade Options dialog box: General Options tab

- On the Copy From File dialog box, click the Copy button.  
When the progress dialog box disappears, the project has been copied.


## Running Alter Tools Tables

To run Alter Tools tables:

- Launch Application Designer and sign on to your database with a valid PeopleSoft user ID.
- From the Application Designer, select File, Open.
- Select *Project* from the Definition drop-down list, enter *PT84TBLSPC* in the name dialog box, and click OK.

4. Select Build, Project.

The Build dialog box appears:

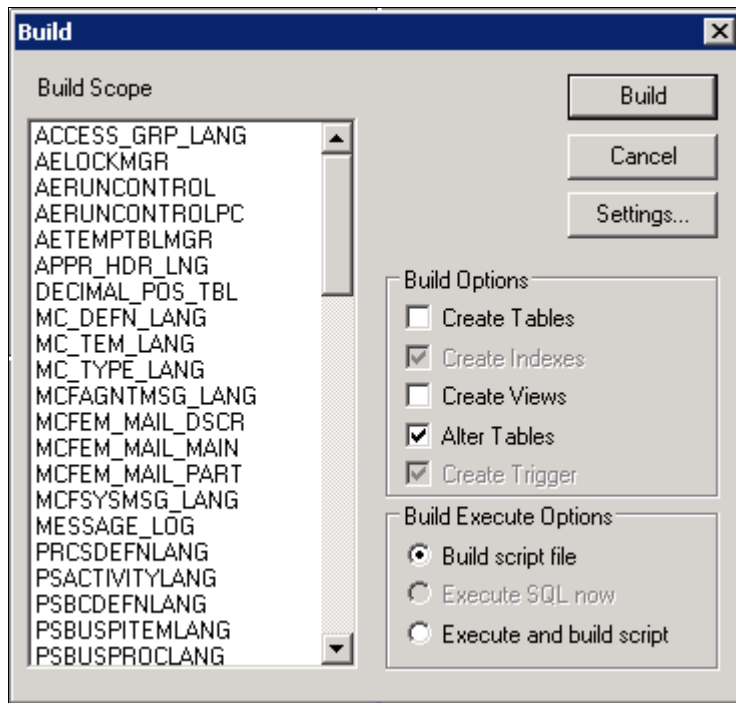


The Build dialog box

5. Select Alter Tables in the Build Options region as shown in the example above (Create Indexes and Create Trigger will automatically be selected).
6. Select Build script file in the Build Execute Options region.

## 7. Click Settings.

The Build Settings dialog box appears:

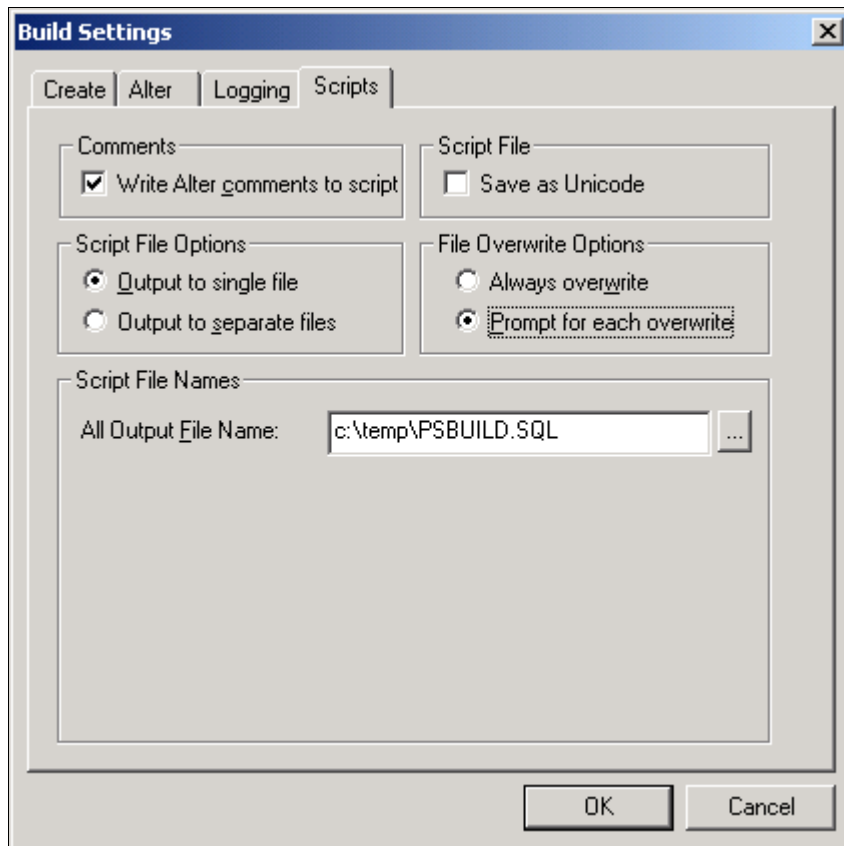


Build Settings dialog box: Scripts tab

## 8. Select the Scripts tab.

## 9. Select Write Alter comments to script.

10. Select the Alter tab and ensure that the Adds, Changes, Renames, and Deletes check boxes are selected in the Alter Any region, and that the Alter even if no changes check box has been selected.

Drop column if data present should be selected in the Drop Column Options region, and Truncate data if field too short should be selected in the Change Column Length Options region.

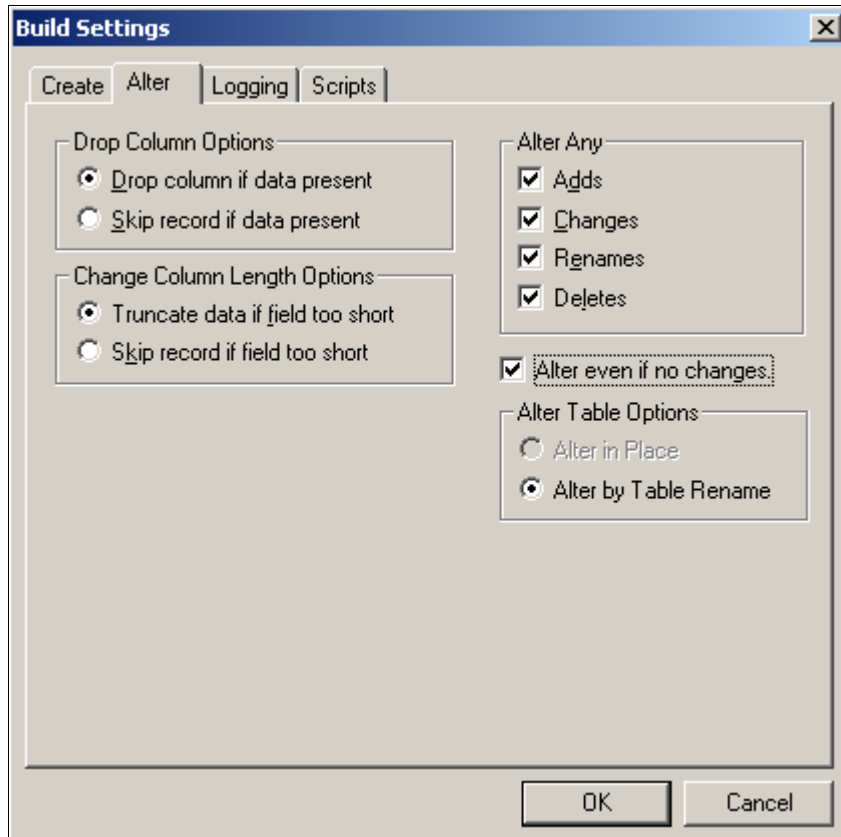

Build Settings dialog box: Alter tab

11. Click OK.

The Build dialog box reappears.

12. Click Build.
13. Click Close when the process is completed.
14. Edit the generated SQL script for the correct tablespace names and sizing parameters if you are not using delivered PeopleSoft tablespace names.
15. Run the generated SQL script in your platform-specific query tool move the tables to the correct tablespaces.

## Task 7-2-15: Updating PeopleTools System Data

Data Mover scripts that update PeopleSoft PeopleTools system data are run to enable new features and load new messages for the PeopleSoft PeopleTools 8.56 release. Several of the scripts that you need to run are dependent upon the version of the application you are running.

See Understanding Database Updates.

To update PeopleSoft PeopleTools system data:

1. Invoke Data Mover by running `PS_HOME\bin\client\winx86\psdmt.exe`.

The PeopleSoft Logon window appears.

2. Log on using the access ID you specified when you created your Data Mover scripts with the Database Setup program.

This will start Data Mover in bootstrap mode.



3. Run the appropriate Data Mover scripts for your application database version.

The application database version refers to the version before you started this step. Be sure to run the scripts in the order listed. The scripts are found in the *PS\_HOME*\scripts directory:

Application Database Version	Scripts to Run
8.40	pt841tls, pt842tls, pt843tls, pt844tls, pt845tls, pt846tls, pt847tls, pt848tls, pt849tls, pt850tls, pt851tls, pt852tls, pt853tls, pt854tls, pt855tls, and pt856tls
8.41	pt842tls, pt843tls, pt844tls, pt845tls, pt846tls, pt847tls, pt848tls, pt849tls, pt850tls, pt851tls, pt852tls, pt853tls, pt854tls, pt855tls, and pt856tls
8.42	pt843tls, pt844tls, pt845tls, pt846tls, pt847tls, pt848tls, pt849tls, pt850tls, pt851tls, pt852tls, pt853tls, pt854tls, pt855tls, and pt856tls
8.43	pt844tls, pt845tls, pt846tls, pt847tls, pt848tls, pt849tls, pt850tls, pt851tls, pt852tls, pt853tls, pt854tls, pt855tls, and pt856tls
8.44	pt845tls, pt846tls, pt847tls, pt848tls, pt849tls, pt850tls, pt851tls, pt852tls, pt853tls, pt854tls, pt855tls, and pt856tls
8.45	pt846tls, pt847tls, pt848tls, pt849tls, pt850tls, pt851tls, pt852tls, pt853tls, pt854tls, pt855tls, and pt856tls
8.46	pt847tls, pt848tls, pt849tls, pt850tls, pt851tls, pt852tls, pt853tls, pt854tls, pt855tls, and pt856tls
8.47	pt848tls, pt849tls, pt850tls, pt851tls, pt852tls, pt853tls, pt854tls, pt855tls, and pt856tls
8.48	pt849tls, pt850tls, pt851tls, pt852tls, pt853tls, pt854tls, pt855tls, and pt856tls
8.49	pt850tls, pt851tls, pt852tls, pt853tls, pt854tls, pt855tls, and pt856tls
8.50	pt851tls, pt852tls, pt853tls, pt854tls, pt855tls, and pt856tls
8.51	pt852tls, pt853tls, pt854tls, pt855tls, and pt856tls
8.52	pt853tls, pt854tls, pt855tls, and pt856tls
8.53	pt854tls, pt855tls, and pt856tls
8.54	pt855tls and pt856tls
8.55	pt856tls

Application Database Version	Scripts to Run
8.56	None

4. Run the `pslanguages.dms` Data Mover script in the `PS_HOME\scripts` directory.  
This script loads language-specific seed data.
5. Run the `tlsupgnoncomp.dms` Data Mover script in the `PS_HOME\scripts` directory.  
This will import the updated PeopleSoft PeopleTools Trees, Roles, and Access Groups into your database.
6. If you are a Multilingual customer, from the Data Mover script that was created for your PeopleSoft database installation, find the `UPDATE` to `PSLANGUAGES`.  
The statement should look similar to the following, where `xxx` is one of the PeopleSoft three-letter language code identifiers, as described earlier:  

```
UPDATE PSLANGUAGES SET INSTALLED=1 WHERE LANGUAGE_CD = 'xxx';
```

  
See "Preparing for Installation," Planning Multilingual Strategy.  
Run the SQL command identified above using your SQL tool.
7. Open Data Mover using a valid PeopleSoft Operator ID, such as PS for Human Capital Management or VP1 for Financials/Supply Chain Management.
8. If you are a Multilingual customer and have non-English languages, run the `ptxxx.dms` scripts in the `PS_HOME\scripts` directory.  
This will update the language-specific PeopleSoft PeopleTools system data in your database.

---

**Note.** The portion of the script name `xxx` is equivalent to the language code (that is, FRA, CFR, GER, JPN, and so on) of the non-English languages you have installed. There will be a Data Mover script for each non-English language.

---

9. Run the `msgtleng.dms` Data Mover Script in the `PS_HOME\scripts` directory.  
Non-English message data was loaded in the `ptxxx.dms` scripts. This will update the messages in your database.
10. Run the `ptstreng.dms` Data Mover script in the `PS_HOME\scripts` directory.  
Non-English system data was loaded in the `ptxxx.dms` scripts. This will update the `SQR` strings in your database.
11. Run the `storept.dms` Data Mover script in the `PS_HOME\src\cbl\base` directory.  
This will update your PeopleSoft PeopleTools COBOL stored statements.
12. Run the `ptdefnsec.dms` Data Mover script in the `PS_HOME\scripts` directory.  
This will update the PeopleSoft PeopleTools Definition Security group.
13. If the application database you are installing is PeopleSoft PeopleTools 8.53 or later, you must compile all directive PeopleCode in your database. Execute the following command on your database to run PeopleSoft Application Designer in quiet mode. From the DOS command line, the syntax is:  

```
<PS_HOME>\bin\client\winx86\pside.exe -CT DB2UNIX -cD <dbname> -CS=>
  <database server name> -CO <oprid> -CP <pswd> -SS NO -QUIET -HIDE ->
  CMPDIRPC -LF <full path of log file>
```
14. Run the `createvw.dms` Data Mover script in the `PS_HOME\scripts` directory.  
This will recreate all the views in your database.

## Task 7-2-16: Running PeopleTools Conversions

This section discusses:

- Understanding Usage of Application Engine Programs
- Converting Portal Objects
- Converting Setup Manager
- Converting Navigation Collection and Pagelet Wizard Data
- Converting Additional Pagelet Wizard Data
- Populating the Feed Options Table
- Updating Feeds for Active Data Guard
- Updating Web Profiles
- Updating Chart and Grid Filters
- Populating the Hash Values
- Migrating the Authorization Configuration Data
- Populating BI Publisher Templates with Object Owner ID Values
- Creating the NavBar and Adding Default Tiles
- Populating the DB-Cache Lock Table

### Understanding Usage of Application Engine Programs

You run several Application Engine programs in this section. For information on Application Engine, including how to use and restart Application Engine programs, consult the Application Engine documentation.

See *PeopleTools: Application Engine*.

### Converting Portal Objects

Perform this step if the application database you are installing is PeopleSoft PeopleTools 8.43 or earlier. The Application Engine program UPG844PORTAL splits PSPRSMDEFN.PORTAL\_URLTEXT into segments. This is performed for PeopleSoft Components URLs to extract Menu, Component, and Market information. Record, Field, Event, and Function Names are extracted from Iscript URLs. This program must be run by a PeopleSoft user with the Portal Administrator or PeopleSoft Administrator role. The following SQL will identify which users have the PeopleSoft Administrator or Portal Administrator roles:

```
select ROLEUSER, ROLENAME from PSROLEUSER where ROLENAME in ('PeopleSoft⇒
Administrator','Portal Administrator')
```

Run the UPG844PORTAL Application Engine program on your database. From the DOS command line, the syntax is:

```
<PS_HOME>\bin\client\winx86\psae -CD <dbname> -CT DB2UNIX -CO <oprid> -CP⇒
<pswd> -R INSTALL -AI UPG844PORTAL
```

Use the values for the database name and user ID that you entered on the startup tab of the Configuration Manager for <dbname> and <oprid>, respectively. However, be aware that <pswd> is not the same as the connect password that you entered on the Configuration Manager startup tab. Enter a value for <pswd> that is the password you want to be associated with the <oprid>.

See "Setting Up the Install Workstation."

You may see some of the following errors when running this Application Engine program:

- Not authorized CRef: <Portal Object Name> (95,5032).

This means that you do not have proper privileges to run this conversion. The user ID that you are using to run this conversion needs to have Portal Administrator permissions.

- Security synchronization failed for Portal Object: <Portal Object Name> (96,61).

This is not a fatal error. It may be caused by a content reference that contains invalid URL text and indicates that there was an internal error writing to the security table. The invalid URL text may be pointing to a component or script that does not exist in the database. If you receive this error, search the Patches and Downloads section of My Oracle Support for Required at Install patches for your application and apply the patches after installing your database.

- Cref <Portal Object Name> points to Menu: <Menu Name>, Component <Component Name> which doesn't exist. (96,80).

The content reference is pointing to an invalid Menu/Component combination. If you receive this error, search the Patches and Updates section of My Oracle Support for Required at Install patches for your application and apply the patches after installing your database.

See "Preparing for Installation," Reviewing Patches and Updates Required at Installation.

See *PeopleTools: Portal Technology*.

## Converting Setup Manager

Perform this step if the application database you are installing is PeopleSoft PeopleTools 8.45 or earlier. The application engine program UPGPTSMDAT upgrades Setup Manager Version 1 (shipped with Fin SCM 8.8, CRM 8.9, and with HCM 8.9) to Setup Manager Version 2 (shipped with PeopleSoft PeopleTools 8.46 and above). The program moves all data from Setup Manager Version 1 tables to Version 2 tables.

The application engine program was designed so that it can be run in any database, and can be rerun in the same database. In either case, it will determine if there is data to convert and run as appropriate. For detailed information, see comments attached to the Steps and Actions in this Application Engine Program within Application Designer. This program must be run by a PeopleSoft user with PeopleSoft Administrator role.

Run the UPGPTSMDAT Application Engine program on your database. From the DOS command line, the syntax is:

```
<PS_HOME>\bin\client\winx86\psae -CD <dbname> -CT DB2UNIX -CO <oprid> -CP=>
<pswd> -R INSTALL -AI UPGPTSMDAT
```

## Converting Navigation Collection and Pagelet Wizard Data

Perform this step if the application database you are installing is PeopleSoft PeopleTools 8.45 or earlier. The application engine program UPGPT846PP adds Navigation Collection and Pagelet Wizard data from the Common Components and PeopleSoft Applications Portal storage tables into PeopleSoft PeopleTools tables.

The application engine program performs the following conversions:

1. Moves data from Common Components tables to PeopleSoft PeopleTools tables.
2. Moves data from PeopleSoft Applications Portal tables to PeopleSoft PeopleTools tables.
3. Updates the registry definitions to enable displaying Navigation pages.
4. Adds, updates, and deletes the Navigation Collections folders and content references in the portal registry to the new structures.
5. Converts Pagelet Wizard definitions to the PeopleSoft PeopleTools Pagelet Wizard version.
6. Renames Navigation Collection and Pagelet Wizard portal registry attributes to the PeopleSoft PeopleTools attribute names.

This program must be run by a PeopleSoft user with the Portal Administrator or PeopleSoft Administrator role.

Run the UPGPT846PP Application Engine program on your database. From the DOS command line, the syntax is:

```
<PS_HOME>\bin\client\winx86\psae -CD <dbname> -CT DB2UNIX -CO <oprid> -CP=>
<pswd> -R INSTALL -AI UPGPT846PP
```

You may see the following error when running this Application Engine program:

```
You are not authorized for the <objecttype>...
```

This means that you do not have proper privileges to run this conversion. The user ID that you are using to run this conversion needs to have Portal Administrator permissions.

You can ignore any other errors encountered on Oracle-delivered objects at this time. Check the Patches and Downloads section of My Oracle Support for Required at Install patches for your application and apply the patches after installing your database. You can safely rerun UPGPT846PP to check for any remaining errors after applying patches.

## Converting Additional Pagelet Wizard Data

Perform this step if the application database you are installing is PeopleSoft PeopleTools 8.47 or earlier. The application engine program UPGPT848PP adds the following Pagelet Wizard data sources from PeopleSoft Applications Portal to PeopleSoft PeopleTools: IB Connector, Integration Broker, SOAP, and URL. In addition, the application program transforms the WSRP Portlets created in PeopleSoft PeopleTools 8.46 or 8.47 versions of Pagelet Wizard. The process includes the following:

- Move data from PeopleSoft Applications Portal tables to PeopleSoft PeopleTools tables.
- Convert WSRP Portlets created by Pagelet Wizard to the new version.

This program must be run by a PeopleSoft user with the Portal Administrator or PeopleSoft Administrator role.

Run the UPGPT848PP Application Engine program on your database. From the DOS command line, the syntax is:

```
<PS_HOME>\bin\client\winx86\psae -CD <dbname> -CT DB2UNIX -CO <oprid> -CP=>
<pswd> -R INSTALL -AI UPGPT848PP
```

You may see the following error when running this Application Engine program:

```
You are not authorized for the <objecttype>...
```

This means that you do not have proper privileges to run this conversion. The user ID that you are using to run this conversion needs to have Portal Administrator permissions.

You can ignore any other errors encountered on Oracle-delivered objects at this time. Check the Patches and Downloads section of My Oracle Support for Required at Install patches for your application and apply the patches after installing your database. You can safely rerun UPGPT848PP to check for any remaining errors after applying patches.

## Populating the Feed Options Table

The Application Engine program UPGPT850PTFP populates the feed options table PS\_PTFP\_OPTIONS if it is empty.

Run the UPGPT850PTFP Application Engine program on your database. From the DOS command line, the syntax is:

```
<PS_HOME>\bin\client\winx86\psae -CD <dbname> -CT DB2UNIX -CO <oprid> -CP=>
<pswd> -R INSTALL -AI UPGPT850PTFP
```

## Updating Feeds for Active Data Guard

The Application Engine program UPGPT852PTFP updates Service Operations used by Feeds for Active Data Guard support.

Run the UPGPT852PTFP Application Engine program on your database. From the DOS command line, the syntax is:

```
<PS_HOME>\bin\client\winx86\psae -CD <dbname> -CT DB2UNIX -CO <oprid> -CP=>
<pswd> -R INSTALL -AI UPGPT852PTFP
```

## Updating Web Profiles

The Application Engine Program UPGPTWBPFNVP migrates the web profile properties from the PT\_PROPVALUE field to the PT\_LPROPVALUE field for the PSWEBPROFNVP record.

Run the UPGPTWBPFNVP Application Engine program on your database. From the DOS command line, the syntax is:

```
<PS_HOME>\bin\client\winx86\psae -CD <dbname> -CT DB2UNIX -CO <oprid> -CP=>
<pswd> -R INSTALL -AI UPGPTWBPFNVP
```

## Updating Chart and Grid Filters

The Application Engine program UPGPTPGFLRS upgrades the Pivot Grid and chart filters from the PSPGVIEWOPT record into the new long filter fields. The grid filters are updated in the PTPG\_FLRS\_GRID\_EX field on the PSPGVIEWOPT record and the chart filters are updated in the PTPG\_FLRS\_CHART\_EX field on the PSPGCHRTFLRSOPT record.

Run the UPGPTPGFLRS Application Engine program on your database. From the DOS command line, the syntax is:

```
<PS_HOME>\bin\client\winx86\psae -CD <dbname> -CT DB2UNIX -CO <oprid> -CP=>
<pswd> -R INSTALL -AI UPGPTPGFLRS
```

## Populating the Hash Values

The Application Engine program UPGPTHASH populates the hash columns on PSPCMTEXT and PSSQLHASH if they are empty.

Run the UPGPTHASH Application Engine program on your database. From the DOS command line, the syntax is:

```
<PS_HOME>\bin\client\winx86\psae -CD <dbname> -CT DB2UNIX -CO <oprid> -CP=>
  <pswd> -R INSTALL -AI UPGPTHASH
```

## Migrating the Authorization Configuration Data

Perform this step if the application database you are installing is PeopleSoft PeopleTools 8.53 or earlier. The Application Engine program UPGPT854AUTH migrates the authorization configuration data from PTCAC\_AUTHCONF to PTCAC\_AUTHORIZE.

Run the UPGPT854AUTH Application Engine program on your database. From the DOS command line, the syntax is:

```
<PS_HOME>\bin\client\winx86\psae -CD <dbname> -CT DB2UNIX -CO <oprid> -CP=>
  <pswd> -R INSTALL -AI UPGPT854AUTH
```

## Populating BI Publisher Templates with Object Owner ID Values

Perform this step if the application database you are installing is PeopleSoft PeopleTools 8.53 or earlier. The Application Engine program UPGPTXPTMPL populates Oracle Business Intelligence Publisher (BI Publisher) templates with owner ID values.

Run the UPGPTXPTMPL Application Engine program on your database. From the DOS command line, the syntax is:

```
<PS_HOME>\bin\client\winx86\psae -CD <dbname> -CT DB2UNIX -CO <oprid> -CP=>
  <pswd> -R INSTALL -AI UPGPTXPTMPL
```

## Creating the NavBar and Adding Default Tiles

Perform this step if the application database you are installing is PeopleSoft PeopleTools 8.53 or earlier. The Application Engine program UPGPT855NUI creates the Fluid User Interface navigation bar (NavBar) and adds default tiles if they do not exist.

See *PeopleTools: Application User's Guide*, "Working with Fluid Homepages."

Run the UPGPT855NUI Application Engine program on your database. From the DOS command line, the syntax is:

```
<PS_HOME>\bin\client\winx86\psae -CD <dbname> -CT DB2UNIX -CO <oprid> -CP=>
  <pswd> -R INSTALL -AI UPGPT855NUI
```

## Populating the DB-Cache Lock Table

The Application Engine program UPGPT851DBC populates the DB Cache lock table PSOBJCACHELOCK.

Run the UPGPT851DBC Application Engine program on your database. From the DOS command line, the syntax is:

```
<PS_HOME>\bin\client\winx86\psae -CD <dbname> -CT DB2UNIX -CO <oprid> -CP=>
<pswd> -R INSTALL -AI UPGPT851DBC
```

## Task 7-2-17: Converting Integration Broker

This section discusses:

- Updating Integration Broker Defaults
- Creating Integration Broker Objects
- Saving Application Messaging Objects
- Exporting Node Transactions
- Deleting Application Messaging Objects
- Deleting Node Transactions

If your database is delivered with PeopleSoft PeopleTools 8.48 or higher, do *not* run this task since the database is already delivered with the new Integration Broker objects as of PeopleSoft PeopleTools 8.48. Instead, proceed to Running Additional PeopleTools Conversions.

### Updating Integration Broker Defaults

User-level node security and transactional security have been added as of PeopleSoft PeopleTools 8.48. Service namespace information, a low-level user on the node, and a low-level permission list for service operations, need to be specified. Edit *PS\_HOME*\scripts\ptibupgrade.dms and make the necessary modifications as documented in the script. Consult with your Integration Broker specialist for assistance.

Open Data Mover using a valid PeopleSoft Operator ID and run this script.

### Creating Integration Broker Objects

The application engine program UPGPT848IBUG converts Application Package metadata into Integration Broker metadata. It also creates the projects PTUPGIBCLONE and PTUPGIBDELETE, and the script ptupg\_trx.dms.

---

**Note.** Conversion errors in the Application Engine log file will be resolved by applying application-specific Required for Install patches.

---

Run the UPGPT848IBUG Application Engine program on your database. From the DOS command line, the syntax is:

```
<PS_HOME>\bin\client\winx86\psae -CD <dbname> -CT DB2UNIX -CO <oprid> -CP=>
<pswd> -R INSTALL -AI UPGPT848IBUG
```

### Saving Application Messaging Objects

The PTUPGIBCLONE project was created by the UPGPT848IBUG Application Engine program and contains objects that were successfully converted. Copy this project to a directory of your choice where it will not be overwritten. The objects are copied to file as a precautionary measure since you will delete them from the database in a subsequent step.



To save Application Messaging Objects:

1. Launch Application Designer and sign on to your database with a valid PeopleSoft user ID.
  2. From the Application Designer, select File, Open.
  3. Select Project, enter *PTUPGIBCLONE* in the name dialog box, and click OK.
  4. Select Tools, Copy Project, To File.
  5. In the resulting dialog box, change the export directory to one of your choice, and click Copy.
- When the progress dialog box disappears, the project has been copied to the specified location.

## Exporting Node Transactions

Open Data Mover using a valid PeopleSoft Operator ID and run the script *PS\_HOME\scripts\ptupg\_trx\_export.dms* to save the old pre-conversion node transaction data.

## Deleting Application Messaging Objects

Delete the obsolete pre-conversion object definitions from the database by first copying the *PTUPGIBDELETE* project to file, and then copying the same project from file. This project was created by the *UPGPT848IBUG* Application Engine program and contains the same objects as *PTUPGIBCLONE*.

To delete Application Messaging Objects:

1. Launch Application Designer and sign on to your database with a valid PeopleSoft user ID.
2. From the Application Designer, select File, Open.
3. Select Project, enter *PTUPGIBDELETE* in the name dialog box, and click OK.
4. Select Tools, Copy Project, To File.
5. In the resulting dialog box, change the export directory to the same one you used for *PTUPGIBCLONE*, and click Copy.

When the progress dialog box disappears, the project has been copied to the specified location.

6. Select Tools, Copy Project, From File.
7. In the resulting dialog box, change the import directory to the previously specified directory, select *PTUPGIBDELETE* from the list of projects, and click Select.

---

**Note.** Because the project already exists on the database, a confirmation dialog box appears asking if you want to overwrite the existing project. Select the File radio button and click OK to overwrite the existing project.

---

8. Select all object types and click the Copy button.

When the progress dialog box disappears, the project has been copied. The actions in the project are set to Delete, so this will delete the obsolete pre-conversion object definitions from the database.

## Deleting Node Transactions

The script *ptupg\_trx.dms* is generated by the *UPGPT848IBUG* Application Engine program. This script can be found in the location specified in the *OUTPUT* variable set in Configuration Manager.

To view the *OUTPUT* variable:

1. Open Configuration Manager.
2. Select the Profile tab.

3. Click Edit to open the Default profile.
4. Select the Process Scheduler tab.
5. Examine the Output Directory value.

Open Data Mover using a valid PeopleSoft Operator ID and run this script to remove obsolete node transaction data associated with the obsolete objects in the PTUPGIBDELETE project.

## Task 7-2-18: Running Additional PeopleTools Conversions

The Application Engine program UPGPTSERVOPR converts WSDL and Schema data.

Run the UPGPTSERVOPR Application Engine program on your database. From the DOS command line, the syntax is:

```
<PS_HOME>\bin\client\winx86\psae -CD <dbname> -CT DB2UNIX -CO <oprid> -CP=>
<pswd> -R INSTALL -AI UPGPTSERVOPR
```

## Task 7-3: Running Additional Data Mover Scripts

---

To import additional data for your specific PeopleSoft database, or to make other required changes, you may need to run additional Data Mover scripts. These script files have the extension .dms and are sometimes referred to as "DMS scripts." They are located in the *PS\_HOME*\scripts or *PS\_APP\_HOME*\scripts directory of your file server, and need to be run from the file server by means of Data Mover.

For the details on which additional application-specific Data Mover scripts to run, consult your application-specific installation instructions.

## Task 7-4: Cleaning Up Orphaned Language Data

---

Perform this task if you are a Multilingual customer and are installing non-English languages. The Application Engine program PTIACLEANLNG removes any orphaned related language objects that do not have a matching base language object.

1. Run the following SQL statement using the appropriate SQL query tool for your RDBMS.

For <Log Path>, specify the path where you want the log for the application engine program in step 2 to be generated, such as c:\temp\.

```
UPDATE PS_PTIASPDMPARAM SET PTIASPPROPVAL = '<Log Path>' WHERE
PTIASPPROPNM = 'DMLOGPATH' ;
```

2. Run the PTIACLEANLNG application engine program.

From the command line utility, the syntax is::

```
<PS_HOME>\bin\client\winx86\psae -CD <dbname> -CT DB2UNIX -CO <oprid> -->
CP <pswd> -R <run_control> -AI PTIACLEANLNG
```

Use the values for the database name and user ID that you entered on the startup tab of the Configuration Manager for <dbname> and <userid> respectively. However, be aware that <userpswd> is not the same as the connect password you entered on the Configuration Manager startup tab. Enter a value for <userpswd> that is the password associated with the <userid>.

## Task 7-5: Running VERSION Application Engine Program

---

Run the VERSION Application Engine program on your database. From the command line utility, the syntax is:

```
<PS_HOME>\bin\client\winx86\psae -CD <dbname> -CT DB2UNIX -CO <userid> ->
CP=>
<userpswd> -R RESETVERSIONS -AI VERSION
```

Use the values for the database name and user ID that you entered on the startup tab of the Configuration Manager for <dbname> and <userid> respectively. However, be aware that <userpswd> is not the same as the connect password you entered on the Configuration Manager startup tab. Enter a value for <userpswd> that is the password associated with the <userid>.

---

**Note.** Do not change the parameter `-R RESETVERSIONS`. This value is required for the run control ID for this task.

---

See "Setting Up the Install Workstation."

## Task 7-6: Running SQR Reports

---

This section discusses:

- Understanding Running SQR Reports
- Binding the dbcalls.bnd
- Running SQRs on the Client Workstation
- Creating a Shortcut to Run SQRs

### Understanding Running SQR Reports

The instructions in this section describe how to run SQR reports from the client workstation. On the Microsoft Windows client, you may prefer to create a shortcut to allow you to run the reports repeatedly. You can use these instructions to run SQRs required in the upcoming task Checking the Database.

You can also choose to run SQR reports from the command line in console mode. Before running SQR from the command line on Microsoft Windows operating systems, set PS\_HOME from the prompt. For example:

```
set PS_HOME=C:\PT856
```

### See Also

*PeopleTools: SQR for PeopleSoft Developers*

*PeopleTools: SQR Language Reference for PeopleSoft*

### Task 7-6-1: Binding the dbcalls.bnd

You need to bind the dbcalls.bnd before running SQR reports.

On Microsoft Windows operating systems, the PeopleSoft installation installs one version of SQR that supports both the CLI interface and the ODBC interface for DB2/LUW.

---

**Note.** The version of DB2, which SQR uses on Microsoft Windows and Linux, will try to bind dbcalls.bnd automatically in some cases. To avoid possible errors if this does not occur, you must carry out this step.

---

To bind dbcalls.bnd:

1. Choose Start, Programs, IBM DB2, Command Window.

2. Connect to the database. For example,

```
C:\db2odbc9\BIN>db2 connect to PSDMO user dbxuser using dbxuser
```

3. Change to the directory where SQRW.exe resides, for example:

```
PS_HOME\bin\sqr\dbx\binw
```

4. From there, type

```
db2 bind dbcalls.bnd
```

---

**Note.** The executable program PSSQR.EXE is a wrapper program used by PeopleSoft Process Scheduler to run SQR reports. It is not designed to run manually outside of Process Scheduler. That is, the PeopleSoft system does not support running PSSQR from the command line.

---


## Task 7-6-2: Running SQRs on the Client Workstation

To run an SQR on the client workstation:

1. Select Start, Run, click Browse, and navigate to *PS\_HOME\bin\sqr\DBX\binw*.  
Select *sqrw.exe* and click Open.

2. Add any needed flags at the end of the command line.

Refer to the table that follows. For those flags that require attributes, append the attributes to the flags with no intervening spaces (for example, `-fE:\fsdmo\bin\sqr\pssqr.ini`).

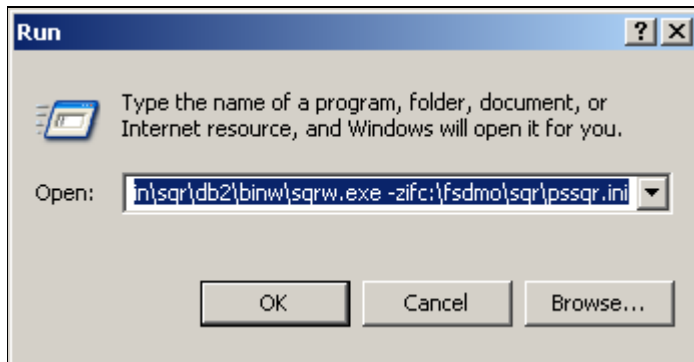

Microsoft Windows Run dialog box launching SQRW

The following table summarizes the SQR report arguments used by PeopleSoft software. (For a full listing of report arguments, press the Help button to view the SQR help topic for this dialog box.)

Flag	Description
-I	Specifies the directories that SQR will search for the #INCLUDE files. (A trailing slash is required.)
-f	Specifies the directory where the report output will be sent.  If you use the <code>-keep</code> flag, you must specify the directory with a trailing slash.  If you use the <code>-printer</code> flag, specify a full pathname with a filename for the HTML file.
-ZIF	Sets the full path and name of the SQR initialization file. The <code>-ZIF</code> flag should point to your <code>PS_HOME\sqr\pssqr.ini</code> file.
-keep	Keeps the .SPF file after the program runs. This enables you to view the report with the SQR viewer.
-printer:ht	Generates the output file in HTML format. Specify the filename, with path location, with the <code>-f</code> flag.


## 3. Click OK.

The SQR for PeopleSoft V8.56 dialog box appears, displaying the attributes that you entered in the Run dialog box. The fields on this dialog box are described in the next step:

---

**Note.** The report arguments in this example have been arranged for readability.

---

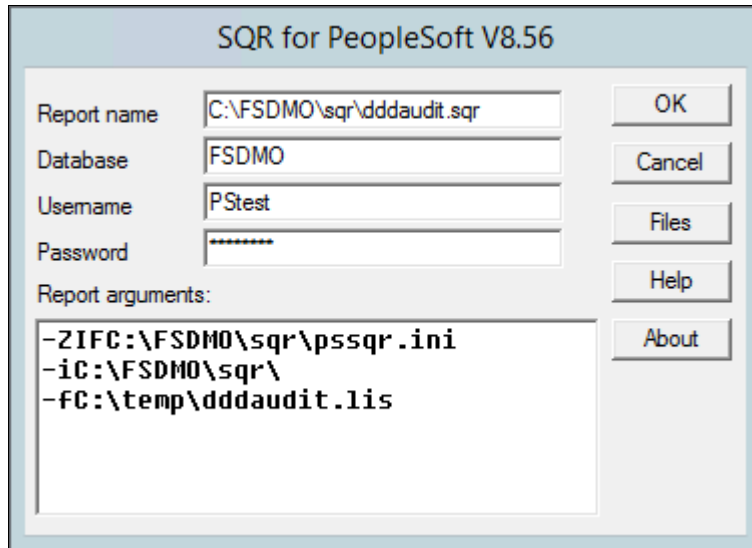

SQR for PeopleSoft dialog box with DDDAUDIT.SQR

## 4. Enter the following values:

- Enter the report name.  
You must specify the full path.
- Enter the access ID in the Username field.
- Enter the access password in the Password field.
- Enter the database name.

## 5. Click OK to run the SQR report.

### Task 7-6-3: Creating a Shortcut to Run SQRs

If you think you may need to run the SQR reports more than once, you may want to create a shortcut on the Windows client workstation. To save the report arguments:

1. Open Windows Explorer on the machine on which you want to run SQR.
2. Navigate to *PS\_HOME*\bin\sqr\DBX\binw.
3. Right-click *sqrw.exe* and click Create Shortcut.
4. Right-click the shortcut that you just created and select Properties.
5. On the Shortcut tab, add the same *sqr* flags that you used in the previous task after *sqrw.exe* in the Target entry box.
6. Click OK.
7. To run the report, double-click the shortcut and specify the following information in the dialog box:
  - Report Name: Enter the full path and the name.

- Database name
  - Username: Enter the access ID.
  - Password: Enter the access password.
  - Report arguments: Make any necessary modifications to the saved arguments.
8. Click OK.

## Task 7-7: Checking the Database

---

Run and examine the SQR reports to verify that your database is complete.

See Running SQR Reports.

To verify that the database is complete, run the following SQR reports from the *PS\_HOME\sqr* directory:

- dddaudit.sqr
- sysaudit.sqr
- swpaudit.sqr, if you plan to swap your base language

For further information about these reports, consult PeopleSoft product documentation. This documentation includes specific information on how to interpret the reports and how to fix any errors found there.

It is good practice to run and read the audit reports, which include sysaudit, dddaudit, swpaudit, and alter audit, after making changes such as applying patches, bundles, and upgrades to the database, to make sure that the tables are internally and externally in synch. It is also a good idea to schedule regular maintenance, for example weekly, in which you run and review the reports. You can find information on these audit reports in the *PeopleTools: Data Management* product documentation.

See *PeopleTools: Global Technology*, "Running the Swap Audit Report."

---

**Note.** If any records show up in the VIEWS-2 or TABLE-3 section of dddaudit and are contained within the PPLTLS84CURDEL project, you may safely drop these records using the SQL query tool for your platform.

---

### See Also

*PeopleTools: Data Management*

*PeopleTools: System and Server Administration*

## Task 7-8: Running SETSPACE.SQR

---

Run the SETSPACE.SQR script to populate or synchronize Tablespace information with the system catalog. To run SETSPACE.SQR:


- Using the instructions provided earlier, run SETSPACE.SQR from the *PS\_HOME\SQR* directory.

See Running SQR Reports.

---

**Note.** Your results will vary depending on the application you are loading. The dialog box example shown here is typical. The report arguments in this example have been arranged for readability.

---

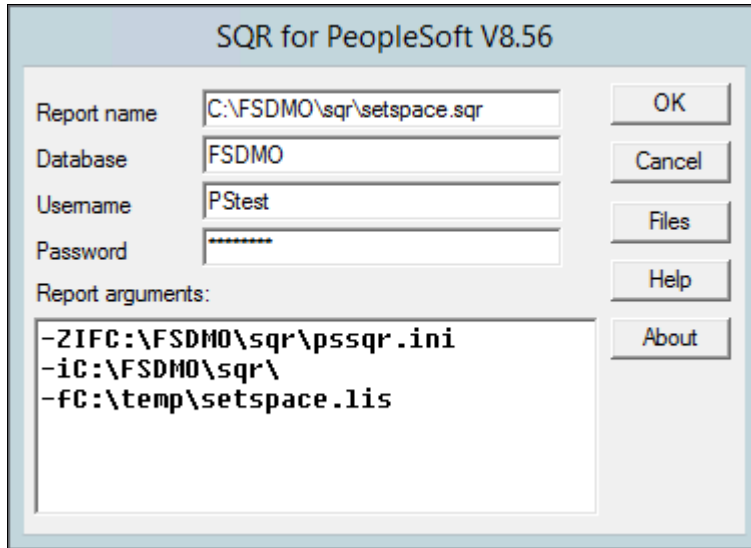

SQR for PeopleSoft dialog box with setspace.sqr

- Click OK.
- As SETSPACE.SQR runs you see a progress indicator similar to the following.

```
Set Table Space Name in PSRECTBLSPC
```

```
Table PSRECTBLSPC column DDLSPACEName have been updated
with the tablespace found in the system catalog table.
The total number of records updated appears at the bottom of this⇒
report.
```

```
Recname          New DDLSpaceName   Old DDLSpaceName
-----          -
This phase of SETSPACE will sync up the PSRECTBLSPC and
PSTBLSPCCAT tables
```

```
PSRECTBLSPC Records Updated:      0
```

```
PSTBLSPCCAT Records Inserted:    0
```

```
Ending SQR.
```



## Task 7-9: Running Alter Audit

---

Use the ALTER AUDIT process to check whether the PeopleSoft PeopleTools tables are synchronized with the underlying SQL data tables in your database. This process compares the data structures of your database tables with the PeopleSoft PeopleTools tables to uncover inconsistencies. The ALTER AUDIT process then reports its findings. At this point of time in the install, we do not expect to see differences between the database structure and the PeopleSoft PeopleTools tables.

---

**Note.** If your application database was delivered on the PeopleSoft PeopleTools release you are installing, this task is optional.

---

**Note.** Triggers are always dropped and re-created during the alter process and will always show up in the generated Alter Audit script. You can ignore the generated script for triggers.


---

To alter PeopleSoft PeopleTools tables:

1. Launch Application Designer and sign on to the installed database with a valid PeopleSoft user ID.
2. Select File, New.
3. Select Project and click OK.
4. Select Insert, Definitions into Project.
5. Select *Records* from the Definition Type drop-down list box.
6. Select *Table* from the Type drop-down list box.
7. Click Insert, and then click Select All.
8. Click Insert, and then click Close.

9. Select Build, Project.

The Build dialog box appears:

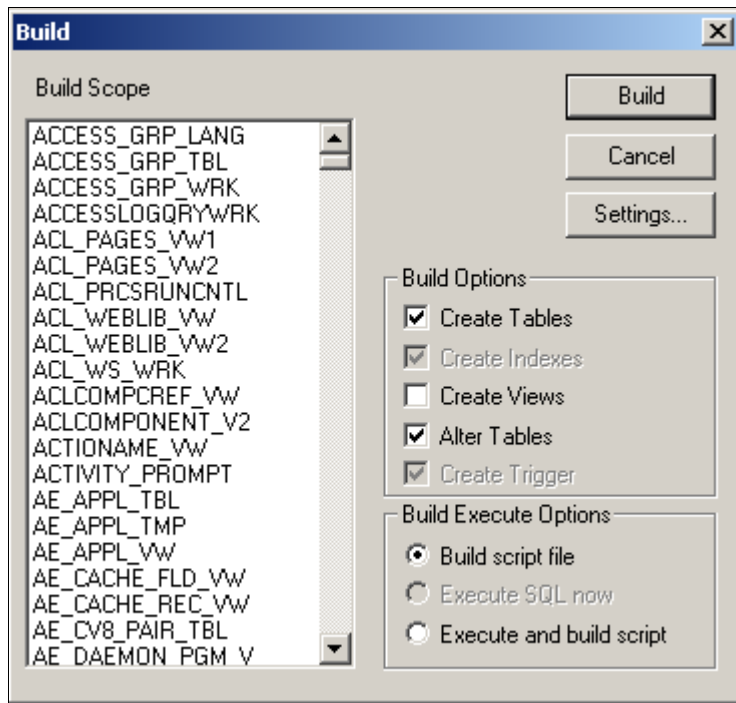


The Build dialog box

10. Select Create Tables and Alter Tables in the Build Options region (Create Indexes and Create Trigger will automatically be selected).
11. Select Build script file in the Build Execute Options region.

## 12. Click Settings.

The Build Settings dialog box appears:

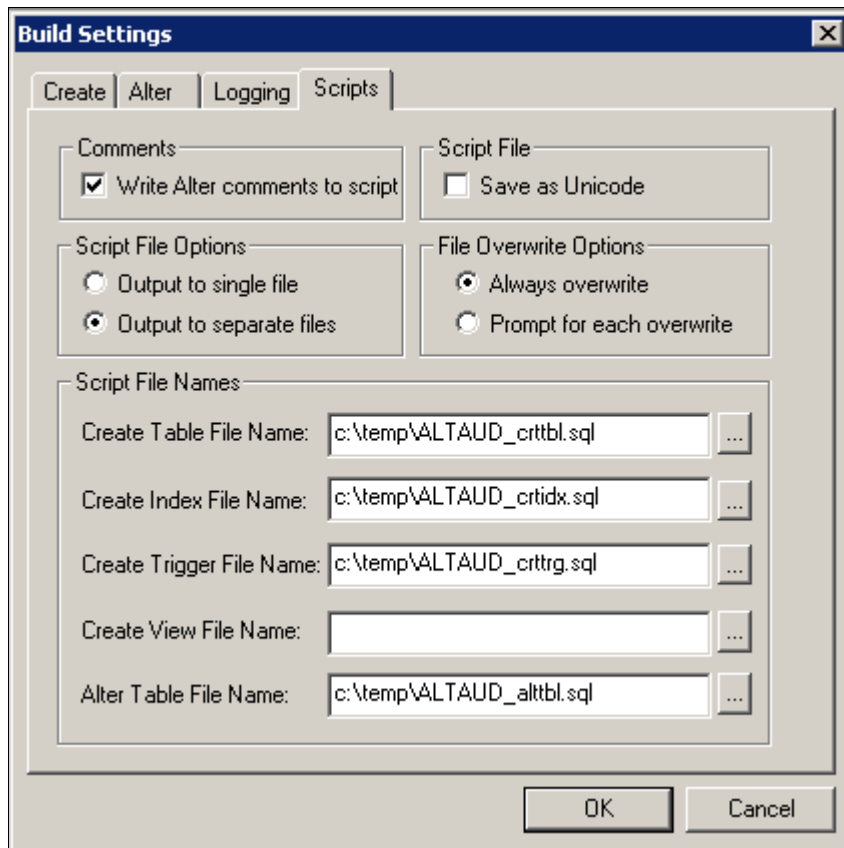

Build Settings dialog box: Scripts tab

## 13. Select the Scripts tab.


## 14. Select Write Alter comments to script.

## 15. Enter a unique output file name for each type.

16. Select the Alter tab and ensure that the Adds,Changes,Renames, and Deletes check boxes are selected in the Alter Any region.


Drop column if data present should be selected in the Drop Column Options region, and Truncate data if field too short should be selected in the Change Column Length Options region.

Make sure that Alter by Table Rename is selected in the Alter Table Options region.

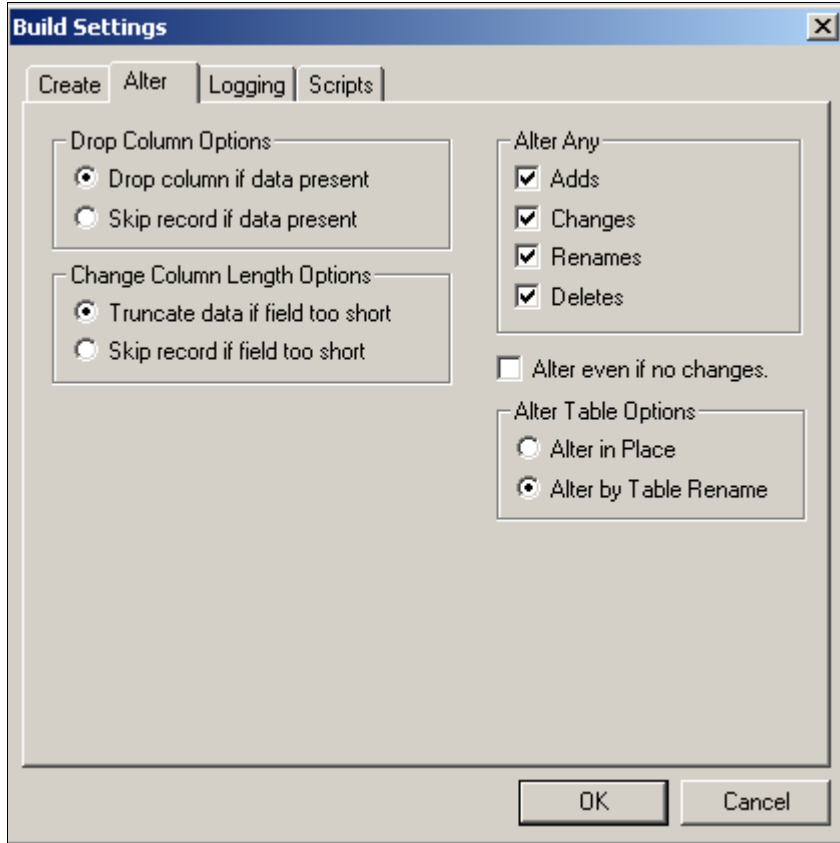

Build Settings dialog box: Alter tab

17. Select the Create tab, and ensure that the options Skip table if it already exists, Recreate view if it already exists, and Recreate index only if modified are selected.

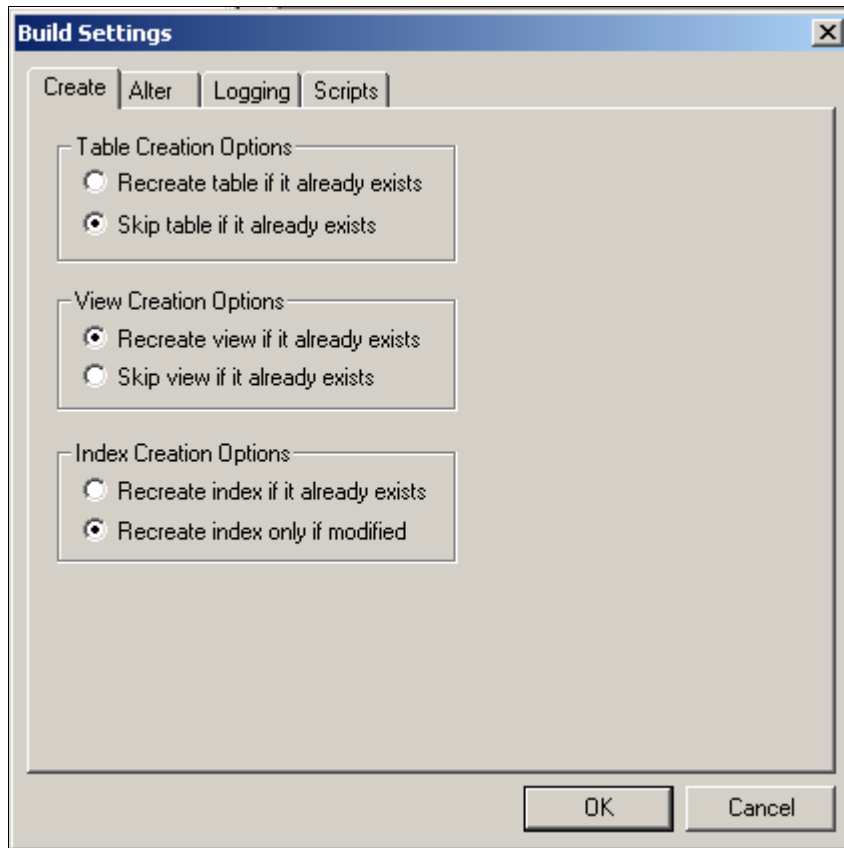

Build Setting dialog box: Create tab

18. Click OK.  
The Build dialog box reappears.
19. Click Build.
20. Click Close when the process is completed.
21. Edit the generated SQL script for the correct tablespace names and sizing parameters if you are not using delivered PeopleSoft tablespace names.
22. Run the generated SQL scripts in your platform-specific query tool to bring your database structure in sync with the PeopleTools tables.



## Chapter 8A

# Configuring the Application Server on Windows

This chapter discusses:

- Understanding the Application Server
- Prerequisites
- Creating a Wallet for the SSL/TLS Setup
- Preparing the Application Server File System for a PeopleTools-Only Upgrade
- Setting Up COBOL for Remote Call
- Verifying Database Connectivity
- Creating, Configuring, and Starting an Initial Application Server Domain

## Understanding the Application Server

---

The information in this chapter is provided to help you configure your PeopleSoft application server.

**Note.** COBOL is not needed for PeopleSoft PeopleTools or for PeopleSoft Applications that contain no COBOL programs. Check the information on My Oracle Support, and your application-specific documentation, for the details on whether your application requires COBOL.

---

Oracle supports a Microsoft Windows application server to use with any of our supported databases for the PeopleSoft installation. For detailed information, consult the certification information on My Oracle Support. The application server support can be found on the certification pages for PeopleSoft systems.

You can install the application server using either a "logical" or "physical" three-tier configuration.

- Installing the application server on the same machine as the database server is known as a logical three-tier configuration. For your initial PeopleSoft installation, Oracle suggests that you install a logical configuration to simplify setup.
- Installing the application server on a machine separate from the database server machine is known as a physical three-tier configuration.

The configuration and log files for application server domains reside in *PS\_CFG\_HOME*. If you do not set a *PS\_CFG\_HOME* environment variable before beginning the application server configuration, the system installs it in a default location based on the current user's settings, as follows:

```
%USERPROFILE%\psft\pt\peopletools_version>
```

See "Preparing for Installation," Defining Installation Locations.

---

**Note.** You can start application servers as a Windows service, which means that administrators no longer need to manually start each application server that runs on a Windows machine.

---

## See Also

"Preparing for Installation," Understanding PeopleSoft Servers and Clients

"Setting Up Process Scheduler on Windows," Starting Process Scheduler as a Windows Service

*PeopleTools: System and Server Administration*, "Using PSADMIN Menus"

*PeopleTools: Data Management*

My Oracle Support, Certifications

"Setting Up the Install Workstation"

"Installing and Compiling COBOL on Windows"

## Prerequisites

---

Before beginning this procedure, you should have completed the following tasks:

- Installed your application server.  
See "Using the PeopleSoft Installer," Planning Your Initial Configuration.
- Installed the supported version of Oracle Tuxedo  
See "Installing Additional Components."
- Set up SSL/TLS protocol for the workstation connection.  
The Secure Socket Layers/Transport Layer Security (SSL/TLS) protocol is supported for Workstation Listener and Jolt Listener ports for the current PeopleSoft PeopleTools release. The application server domain configuration requires a wallet. You can use the delivered wallet or create your own.  
See *PeopleTools: Integration Broker*, "Installing Web Server-Based Digital Certificates."
- Granted authorization to a PeopleSoft user ID to start the application server.  
The database configuration procedure includes a step for setting up the user ID with authorization to start the application server. See the application-specific installation instructions for information on the user IDs for your PeopleSoft application. See the *PeopleTools: Security Administration* product documentation for information on PeopleSoft PeopleTools delivered user profiles.  
See "Creating a Database on UNIX," Running the Database Configuration Wizard.  
See "Creating a Database Manually on Microsoft Windows or UNIX," Creating Data Mover Import Scripts.
- Run the following SQL statements on your database server to review and if needed, update the PSCLASSDEFN table:
 

```
SELECT CLASSID, STARTAPPSERVER FROM PSCLASSDEFN
WHERE CLASSID IN (SELECT OPRCLASS FROM PSOPRCLS WHERE OPRID='<OPRID>')
UPDATE PSCLASSDEFN SET STARTAPPSERVER=1 WHERE CLASSID='<CLASSID>'
```



---

**Note.** Installers typically use VP1 or PS to test the application server. If these users are deleted or their passwords are changed, the application server will no longer be available. To avoid this problem, you can set up a new operator (called PSADMIN or PSASID, for instance) with privileges to start the application server. If you do this, you can use the new operator for your application servers and you won't need to change the password each time VP1 or PS is changed.

---

## See Also

"Creating a Database Manually on Microsoft Windows or UNIX," Configuring an ODBC Data Source for Connectivity on Microsoft Windows

## Task 8A-1: Creating a Wallet for the SSL/TLS Setup

---

This section discusses:

- Using the Delivered Wallet
- Creating a Wallet with OpenSSL

### Task 8A-1-1: Using the Delivered Wallet

Before you configure the application server to use the SSL/TLS protocol, you need a wallet. Use these instructions to create wallets for the application server and workstation client.

---

**Note.** The term "Oracle Wallet" is sometimes used in the software and documentation, for example in PSADMIN custom configuration, to refer to wallets on all RDBMS. In this context it does not refer to an entity specific to an Oracle RDBMS.

---

You also have the option to use the wallets that are included with the PeopleSoft PeopleTools installation. The default wallet for the application server is named psft and is located in `$PS_SERVDIR/security`. When you configure the application server, define the default wallet as follows:

- `SEC_PRINCIPAL_LOCATION=%PS_SERVDIR%\security`
- `SEC_PRINCIPAL_NAME=psft`

To specify the default wallet for the workstation client:

- `SEC_PRINCIPAL_LOCATION=PS_HOME\bin\client\winx86\security`
- `SEC_PRINCIPAL_NAME=wscpsft`

The default Java Keystore file used for the SSL/TLS configuration for JSL ports is located in `<PIA_HOME>\webserv\<DOMAIN_NAME>\piaconfig\keystore\pskey`. If you change the Keystore password in this file, you must also provide the password in the PIA configuration.properties file at `<PIA_HOME>\webserv\<DOMAIN_NAME>\application\peoplesoft\PORTAL.war\WEB_INF\psftdoc\ps`.

### Task 8A-1-2: Creating a Wallet with OpenSSL

This section discusses:

- Defining OpenSSL Options
- Creating a Server Wallet for the Application Server Domain with OpenSSL

- Creating a Client Wallet for the Workstation Client with OpenSSL
- Adding the Server's Certificate to the Client's Trust Store with OpenSSL

## Defining OpenSSL Options

An example of an OpenSSL command that can be used to create a wallet is as follows.

For more information, see the OpenSSL documentation.

```
openssl pkcs12 -export -out ewallet.p12 -inkey server.key -in server.crt ->
chain -CAfile caCert.crt -passout pass:<password>
```

- `-export`: indicates that a PKCS 12 file is being created
- `-chain`: specifies that an attempt is made to include the entire certificate chain of the user certificate
- `-inkey`: specifies the private key file
- `-in`: specifies the file that contains the user certificate and any other certificates in the certificate chain
- `-CAfile`: specifies a file containing trusted certificates
- `-out`: specifies the output file name, which must be `ewallet.p12` for an Oracle Wallet for PeopleSoft installations.
- `-passin`: specifies the password for the private key file
- `-passout`: specifies the password for the newly created wallet

## Creating a Server Wallet for the Application Server Domain with OpenSSL

This section gives an example of creating a wallet for the application server with the open-source tool OpenSSL.

1. Create a directory, for example `wallet.server`.

For example on Microsoft Windows:

```
mkdir C:\wallet.server
```

2. Change directory to `wallet.server`.

```
cd wallet.server
```

3. Enter the following command:

```
openssl genrsa -out server.key 4096
```

4. Enter the following command.

```
openssl req -new -key server.key -out server.csr -subj <subject>
```

For example:

```
openssl req -new -key server.key -out server.csr -subj '/C=country/CN=>
commonName'
```

The `<subject>` values in this step and step 7 are used to replace the specified data in an input request, and output a modified request. The format for `<subject>` is

`'/type0=value0/type1=value1/type2=...'`. Characters must be escaped with a backslash (`\`), and no spaces are skipped. Use the following fields:

- `/C` — Country

- /CN — Common name
  - /L — Location
  - /O — Organization
  - /OU — Organizational Unit
  - /ST — State
5. Enter the following command:
 

```
openssl genrsa -out caCert.key 4096
```
  6. Enter the following command,
 

```
openssl req -new -x509 -days 1826 -key caCert.key -out caCert.crt -subj =>
<subject>
```

For example:

```
openssl req -new -x509 -days 1826 -key caCert.key -out caCert.crt -subj=>
'/C=US/OU=Class 2 Public Primary Certification Authority/O=My=>
Organization'
```
  7. Enter the following command:
 

```
openssl x509 -req -days 730 -in server.csr -CA caCert.crt -CAkey ca=>
Cert.key -set_serial 01 -out server.crt
```
  8. Enter the following command to create the wallet ewallet.p12 and specify the server password:
 

```
openssl pkcs12 -export -out ewallet.p12 -inkey server.key -in=>
server.crt -chain -CAfile caCert.crt -passout pass:<server_password>
```

## Creating a Client Wallet for the Workstation Client with OpenSSL

This section gives an example of creating a client wallet with the open-source tool OpenSSL.

1. Create a directory, for example wallet.client, and change to that directory.
 

```
mkdir wallet.client
cd wallet.client
```
2. Copy the server's trust store to the client wallet.
 

```
cp wallet.server\caCert.crt wallet.client
cp wallet.server\caCert.key wallet.client
```
3. Enter these commands:
 

```
openssl genrsa -out client.key 4096
```
4. Run this command:
 

```
openssl req -new -key client.key -out client.csr -subj <subject>
```

For example:

```
openssl req -new -key client.key -out client.csr -subj '/C=country/CN=>
commonName'
```

## 5. Run this command:

```
openssl x509 -req -days 730 -in client.csr -CA caCert.crt -CAkey ca⇒
Cert.key -set_serial 01 -out client.crt
```

## 6. Enter the following command to create the wallet ewallet.p12 and specify the client password:

```
openssl pkcs12 -export -out ewallet.p12 -inkey client.key -in⇒
client.crt -chain -CAfile caCert.crt -passout pass:<client_password>
```

## 7. Remove the client wallet password:

## a. Make a backup copy of the wallet, ewallet.p12:

On Microsoft Windows:

```
xcopy ewallet.p12 oldwallet.p12
```

## b. Run this command:

```
openssl pkcs12 -clcerts -nokeys -in oldwallet.p12 -out⇒
certificate.crt -password pass:<client_password> -passin pass:⇒
<client_password>
```

## c. Run this command:

```
openssl pkcs12 -cacerts -nokeys -in oldwallet.p12 -out ca-cert.ca -⇒
password pass:C<client_password> -passin pass:<client_password>
```

## d. Run this command:

```
openssl pkcs12 -nocerts -in oldwallet.p12 -out private.key -password⇒
pass:<client_password> -passin pass:<client_password> -passout pass:⇒
temp
```

## e. Run this command:

```
openssl rsa -in private.key -out NewKeyFile.key -passin pass:temp
```

## f. Run the command to create the PEM.pem file.

This file is created to copy the public key and root certificates.

On Microsoft Windows:

```
type certificate.crt ca-cert.ca >PEM.pem
```

## g. Run this command:

```
openssl pkcs12 -export -nodes -in PEM.pem -inkey NewKeyFile.key -out⇒
ewallet.p12 -passout pass:TrustedCertsOnlyNoPWNeeded
```

## Adding the Server's Certificate to the Client's Trust Store with OpenSSL

To complete the setup, add the application server's certificate to the workstation client's trust store:

## 1. Change directory.

```
cd %ORACLE_HOME%\jdk\bin
```

## 2. Add the certificate to the trust store found in the web server directory for the application server domain.

```
keytool -import -file <server_wallet>/<certificate> -alias srvcert ->
keystore <PIA_HOME>\webserv\<DOMAIN_NAME>\piaconfig\keystore\pskey ->
storepass password -noprompt
```

For example, on Microsoft Windows:

```
keytool -import -file wallet.server/caCert.crt -alias srvcert -keystore=>
C:\user\psft\pt\8.56\webserv\ps\piaconfig\keystore\pskey -storepass=>
password -noprompt
```

## Task 8A-2: Preparing the Application Server File System for a PeopleTools-Only Upgrade

---

When performing the installation of the separate upgrade *PS\_HOME* (which is different than your old release *PS\_HOME*), you may configure your Application Server at this point in time of the installation. Do not boot your Application Server until directed to do so within the upgrade. If you are installing into an old *PS\_HOME* or *PS\_CFG\_HOME* after completing a PeopleTools-only upgrade, review your old *PS\_HOME* or *PS\_CFG\_HOME* for configuration files that you may want to reuse for the new PeopleSoft PeopleTools release.

### See Also

"Preparing for Installation," Preparing for the PeopleTools-Only Upgrade

## Task 8A-3: Setting Up COBOL for Remote Call

---

Remote Call is a PeopleCode feature that launches a COBOL program from an application server, PeopleCode program or a batch Application Engine PeopleCode program and waits for it to complete execution before continuing. The execution of a COBOL program via Remote Call is completely independent of the Process Scheduler. You need to set up a COBOL runtime environment and COBOL executables on the application server to support Remote Call.

See "Installing and Compiling COBOL on Windows."

---

**Note.** If your application does not contain COBOL programs, you do not need to purchase or compile COBOL.

---

## Task 8A-4: Verifying Database Connectivity

---

Before continuing, it is critical to verify connectivity to the database that the application server domain will use. To verify connectivity, connect to the database server from the application server using the native SQL tool on the application server.

For DB2 for Linux, UNIX, and Windows, use the Command Center.

## Task 8A-5: Creating, Configuring, and Starting an Initial Application Server Domain

---

This section discusses:

- Creating, Configuring, and Starting the Application Server Domain
- Testing the Three-Tier Connection
- Importing an Existing Application Server Domain Configuration
- Setting Up a Custom Application Server Domain Configuration
- Troubleshooting Common Errors

### Task 8A-5-1: Creating, Configuring, and Starting the Application Server Domain

To create, configure, and start the application server domain:

1. Run the `psadmin` command.

You see the PeopleSoft Server Administration menu, as in this example:

```
-----
PeopleSoft Server Administration
-----

PS_CFG_HOME:  C:\Users\JSMITH\psft\pt\8.56
PS_HOME:      C:\PT8.56
PS_APP_HOME:  C:\HR92

1) Application Server
2) Process Scheduler
3) Search Server
4) Web (PIA) Server
5) Switch Config Home
6) Service Setup
7) Replicate Config Home
8) Refresh Config Home
q) Quit
```

Command to execute (1-8, q): **1**

---

**Note.** Make sure you change the directory from the `PS_HOME` on the file server to the `PS_HOME`, or high-level directory, on the application server.

---

2. Depending on your environment, you may see a message after the initial menu, which indicates that PSADMIN has modified the `PS_CFG_HOME/peopletools.properties` file with the current `PS_HOME` location:

```
*****
PS_CFG_HOME/peopletools.properties file has been updated.
You should use the Config Home Refresh feature in PSAdmin
```

to ensure that all of your domains are current.  
 Alternatively, you may recreate all of your domains.  
 Please press any key to continue...

\*\*\*\*\*

This indicates that one of these situations exists:

- The *PS\_CFG\_HOME* that you are working with was used previously from a different *PS\_HOME*. In this case, you should recreate any existing Application Server, Process Scheduler, Search, or PIA domains in this *PS\_CFG\_HOME*.
  - You configured your environment such that *PS\_CFG\_HOME* is the same as *PS\_HOME*. The first time you use PSADMIN to create a domain, it updates the *PS\_CFG\_HOME/peopletools.properties* file. Continue with the next step.
3. Specify *1* for Application Server and press ENTER.
  4. Specify *2* to Create a domain and press ENTER.

```
-----
PeopleSoft Application Server Administration
-----
```

- ```

1) Administer a domain
2) Create a domain
3) Delete a domain
4) Import domain configuration
q) Quit
```

Command to execute (1-4, q): **2**

5. Specify the domain name.

In this example the domain name is HRDMO:

Please enter name of domain to create : **HRDMO**

Domain names are case sensitive and must be eight US-ASCII characters or less. The domain name is used to create a directory name under the *PS\_CFG\_HOME/appserv* directory.

See the information on *PS\_CFG\_HOME* and server domain configuration in the *PeopleTools: System and Server Administration* product documentation.

6. Specify *4* for small if this is your initial domain installation, press ENTER.

See *PeopleTools: System and Server Administration*.

7. After the system creates the domain, the PeopleSoft Application Server Administration menu appears with a Quick-configure menu similar to this:

```
-----
Quick-configure menu -- domain: HRDMO
-----
```

| Features<br>=====  |       | Settings<br>=====            |
|--------------------|-------|------------------------------|
| 1) Pub/Sub Servers | : No  | 17) DBNAME : [HRDMO]         |
| 2) Quick Server    | : No  | 18) DBTYPE : [DB2UNIX]       |
| 3) Query Servers   | : No  | 19) UserId : [QEDMO]         |
| 4) Jolt            | : Yes | 20) UserPswd : []            |
| 5) Jolt Relay      | : No  | 21) DomainID : [TESTSERV]    |
| 6) WSL             | : No  | 22) AddToPATH : [C:\Apps\db⇒ |
| \db2odbc91\bin]    |       |                              |

```

7) PC Debugger           : No           23) ConnectID           : [people]
8) Event Notification    : Yes          24) ConnectPswd        : []
9) MCF Servers           : No           25) DomainConnectPswd : []
10) Perf Collator       : No           26) WSL Port           : [7000]
11) Analytic Servers     : Yes          27) WSL SSL Port       : [7010]
12) Domains Gateway     : No           28) JSL Port           : [9000]
13) Push Notifications  : No           29) JSL SSL Port       : [9010]
                          :                30) JRAD Port          : [9100]

```

Actions

=====

```

14) Load config as shown
15) Custom configuration
16) Edit environment settings
h) Help for this menu
q) Return to previous menu

```

HINT: Enter 17 to edit DBNAME, then 14 to load

Enter selection (1-28, h, or q):

---

**Note.** If your installation includes more than one application server domain on a given machine, read the troubleshooting section for more information.

---

See Troubleshooting Common Errors.

- If you need to modify any of the values for these settings, enter the number next to the parameter name, press ENTER, then type the new value, and press ENTER again.

If you need to change any of the features, type the number next to the feature name and press ENTER.

- Configure the WSL to boot by changing option 6 to Yes.

Enter 6, and press ENTER.

- If you intend to use the PeopleSoft Report Distribution system, you must select *Yes* for feature 8, Event Notification.

This enables the REN server, which is used by the "run to window" functionality of the Report Distribution system. *The Report Distribution system, MultiChannel Framework, and Optimization Framework use REN servers.* You must also remember to enter an Authentication Token Domain when installing the PeopleSoft Pure Internet Architecture (PIA).

- If you are configuring an application server domain to support applications based on the PeopleSoft MultiChannel Framework (such as PeopleSoft CRM ERMS), select feature 9, MCF Servers.

See the information on configuring REN Servers in the product documentation.

See *PeopleTools: MultiChannel Framework*.

- Enter 22 for AddToPATH, and enter the path to the 64-bit connectivity software. For example:

```
C:\sqllib\bin
```

---

**Note.** You can skip this step if the PATH environment variable already includes the database connectivity path.

---

- Enter the values for the 20) UserPswd and 24) ConnectPswd that you specified during the database configuration.

Reenter each password to verify the value. The password is hidden by masking characters as you type and in



the Quick-configure menu.

14. If you want to set a Domain Connection password, enter 25 and specify a password of 8 characters or less.

Reenter the password to verify the value. The password is hidden by masking characters as you type and in the Quick-configure menu.

The Domain Connection password is optional. You can specify a value or leave it blank. However, if you do specify a value, you must supply the same value when installing the PeopleSoft Pure Internet Architecture, to ensure the connection to the Application Server.

15. To set up the Workstation Listener for SSL/TLS protocol, enter 27 for WSL SSL Port, and specify an available port number.

The default port number is 7010.

16. To set up the Jolt listener for SSL/TLS protocol, enter 29 for JSL SSL Port, and specify an available port number.

The default port number is 9010.

17. Use the custom configuration menu to specify the settings for SSL/TLS encryption and the wallet location.

See *PeopleTools: Integration Broker*, "Installing Web Server-Based Digital Certificates."

- a. To specify the minimum and maximum encryption for SSL/TLS, select 15 for Custom Configuration.
- b. Reply *y*, and press ENTER, at this prompt:

```
Do you want to change any config values (y/n) [n]?
```

- c. Reply *n*, and press ENTER, at this prompt:

```
Do you want to change any values (y/n) [n]?
```

Continue to enter *n*, for No, for all sections until you see the Workstation Listener section, and then answer *y*. (Be aware that there are several sections.)

- d. If necessary, change the values for WSL minimum and maximum encryption to correspond to your installed SSL/TLS cipher. The default minimum is 0 and the default maximum is 256. The maximum is the number of bits that indicates the highest level of encryption possible for the installed SSL/TLS version.

```
Values for config section - Workstation Listener
```

```
Address=%PS_MACH%
Port=7000
SSL Port=7010
WSL Min Encryption=0
WSL Max Encryption=256
Min Handlers=1
Max Handlers=2
Max Clients per Handler=40
Client Cleanup Timeout=60
Init Timeout=5
Tuxedo Compression Threshold=5000
```

- e. Accept the defaults for the next series of questions until asked if you want Oracle Wallet configured. In this case, answer *y*.

- f. Specify the values for the Oracle Wallet location, name, and password, or accept the defaults.

You can use an existing wallet that you created, or use the default wallet found in the security directory.

```
Values for config section - Oracle Wallet
```

```
SEC_PRINCIPAL_LOCATION=%PS_SERVDIR%\security
```

```
SEC_PRINCIPAL_NAME=psft
SEC_PRINCIPAL_PASSWORD=
```

- g. Accept the defaults for the next series of questions until asked if you want the JOLT Listener configured. In this case, answer *y*
- h. If necessary, change the values for JSL minimum and maximum encryption to correspond to your installed SSL/TLS cipher. The default minimum is 0 and the default maximum is 256. The maximum is the number of bits that indicates the highest level of encryption possible for the installed SSL/TLS version.

Values for config section - JOLT Listener

```
Address=%PS_MACH%
Port=9000
SSL Port=9010
JSL Min Encryption=0
JSL Max Encrytion=256
Min Handlers=1
Max Handlers=2
Max Clients per Handler=40
Client Cleanup Timeout=10
Init Timeout=5
Client Connection Mode=ANY
Jolt Compression Threshold=1000000
```

- i. Accept the default for the remaining questions; the configuration will load automatically.

18. If you are installing a REN server:

- a. Enter *15* for Custom configuration.
- b. Reply *y*, and press ENTER, at this prompt:  
Do you want to change any config values (y/n) [n]?
- c. Reply *n*, and press ENTER, at this prompt:  
Do you want to change any values (y/n) [n]?

Continue to enter *n*, for No, for all sections until you see the PSRENSRV section, and then answer *y*. (Be aware that there are several sections.)

- d. Leave the defaults for all settings except for `default_auth_token`, which you should set to the domain name for your web server.

---

**Note.** The `default_auth_token` setting should be identical to the Authentication Token Domain that you set during PIA installation.

---

See "Setting Up the PeopleSoft Pure Internet Architecture in GUI Mode."

- e. Accept the defaults for the next series of questions until asked if you want Event Notification configured. In this case, answer *y*.
  - f. Accept the default for the remaining questions; the configuration will load automatically.
19. If you are not installing a REN server, after you update the settings you can load the configuration by entering *14*, for Load config as shown, from the Quick-configure menu.
20. To start the application server (whether you installed a REN server or not), select *1*, Boot this domain, from the PeopleSoft Domain administration menu.
21. Select *1*, Boot (Serial Boot) or *2*, Parallel Boot, from the PeopleSoft Domain Boot Menu.

---

**Note.** The messages you see and the number of processes started will depend on the options you chose during configuration.

---

22. If you plan to continue with PIA installation and testing, do not shut down the application server at this time.
23. If you want to shut down your PeopleSoft application server domain later, follow these simple steps:
  - a. From the PeopleSoft Domain Administration menu, enter 2 for Domain shutdown menu.
  - b. From the PeopleTools Domain Shutdown Menu, enter 1 for Normal shutdown.  
You see messages about the application server processes being shut down. The number of processes stopped will vary depending on the number of processes that started when you booted the domain.
  - c. Enter *q* to quit the PeopleSoft Domain Administration Menu.

## Task 8A-5-2: Testing the Three-Tier Connection

If you get an error message when you try to sign in to the Application Server in Application Designer (that is, three-tier mode), it may be due to an incorrect server name or port number, because the database server is not running, or because the application server was not booted. To test a three-tier connection from the PeopleTools Development Environment (the Windows-based client):

1. Start Configuration Manager with one of these methods:
  - On Microsoft Windows 7, select Start, Programs, PeopleTools 8.56, Configuration Manager.
  - On Microsoft Windows 8 or 2012 R2, access the Apps screen and navigate to PeopleTools 8.56, Configuration Manager.
  - Run `PS_HOME\bin\client\winx86\pscfg.exe`.
2. Select the Profile Tab. Highlight Default and select Edit.
3. On the Edit Profile dialog box, select *Application Server* as the Connection Type.
4. Enter values for these parameters:
  - Application Server Name
  - Machine Name or IP Address
  - Port Number (WSL)  
Enter the WSL port that you specified when creating the application server domain. If you want to use the SSL/TLS protocol for connection, enter the WSL SSL port number (the default is 7010). If you want to use the LLE protocol, enter the non-SSL WSL port (the default is 7000).
  - Domain Connection Password and Domain Connection Password (confirm)  
Specify a value for the password, and repeat your entry for confirmation. The password must be 8 characters or less.  
  
This password is optional. If you did not set the Domain Connection Password in Configuration Manager or in the Application Server configuration, leave it blank. If you specify a password, you must supply the same password during the PeopleSoft Pure Internet Architecture installation for a successful connection between the Application Server and PeopleSoft Pure Internet Architecture.  
  
See the *PeopleTools: System and Server Administration* product documentation for information on using PeopleSoft Configuration Manager and PSADMIN.
  - Wallet Location  
Enter the location that you specified for the client wallet. The default location is `%PS_HOME%\bin\client\winx86\security`.

- **Wallet Name**

Enter the name for the client wallet that you specified. The default name is `wscpsft`.

5. Select **Set** to add the definition to the list and select **OK** to close the dialog box.
6. On the Configuration Manager dialog box, select the **Startup** tab.
7. Select *Application Server* from the Database Type list. Your application server name should be displayed.
8. Enter the values for User ID, Connect ID, and password.
9. Click **OK**.

---

**Note.** Confirm that the application server is running by booting it from PSADMIN. Select *1*, Boot this domain, from the PeopleSoft Domain administration menu. Select option *1*, Boot (Serial Boot) or *2*, Parallel Boot, from the PeopleSoft Domain Boot menu.

---

10. Start Application Designer with one of these methods:
  - On Microsoft Windows 7, select **Start, Programs, PeopleTools 8.56, Application Designer**.
  - On Microsoft Windows 8 or 2012 R2, access the Apps screen and navigate to **PeopleTools 8.56, Application Designer**.
  - Run `PS_HOME\bin\client\winx86\pside.exe`.
11. In the PeopleSoft Signon dialog box:
  - Select *Application Server* as the Connection Type.
  - Confirm that the Application Server Name is correct.
  - Enter values for User ID and password.
12. Select **OK** to open Application Designer.

If you see the following error message when you try to sign in to the Application Server in Application Designer:

```
Network API: "Could not connect to application server 'Application Server=>
Name' Make sure the PeopleTools authentication server (PSAUTH) is booted."
```

This may indicate a problem with the Domain Connection Password. For example, if the password set in the Application Server configuration file does not match the value in Configuration Manager, you may get this error message when you sign in to Application Designer in three-tier mode. Check the Application Server logs for more information.

### Task 8A-5-3: Importing an Existing Application Server Domain Configuration

If you have an existing application server configuration for a previous PeopleSoft PeopleTools release, you can import it to create a new domain. You can import an existing domain configuration by specifying a file or by specifying the path to an existing domain. To import from a file, you must use the `psappsrv.cfg` file found inside an existing application server domain folder (you must specify the full path to `psappsrv.cfg`). This file can be located anywhere in the file system, but must be named `psappsrv.cfg`. To import from an existing domain configuration that you created in the current PeopleSoft PeopleTools release, you must specify `PS_CFG_HOME` and the name of an existing application server domain. (If you are importing a domain from a release before PeopleSoft PeopleTools 8.50, note that the domains were created in `PS_HOME`, and that is the path that you should provide.)

To import an existing application server domain configuration:

1. Go to the `PS_HOME\appserv` directory and run the `psadmin` command.

You see the PeopleSoft Server Administration menu, as in this example:

```

-----
PeopleSoft Server Administration
-----

PS_CFG_HOME:  C:\Users\JSMITH\psft\pt\8.56
PS_HOME:      C:\PT8.56
PS_APP_HOME:  C:\HR92

1) Application Server
2) Process Scheduler
3) Search Server
4) Web (PIA) Server
5) Switch Config Home
6) Service Setup
7) Replicate Config Home
8) Refresh Config Home
q) Quit

```

Command to execute (1-8, q): **1**

The PS\_CONFIG\_HOME location, also referred to as Config Home, corresponds to the current working directory. For information on how Config Home is set, see the *PeopleTools: System and Server Administration* product documentation.

---

**Note.** Make sure you change the directory from the *PS\_HOME* on the file server to the *PS\_HOME* on the application server.

---

- Depending on your environment, you may see a message after the initial menu, which indicates that PSADMIN has modified the *PS\_CFG\_HOME/peopletools.properties* file with the current *PS\_HOME* location:

```

*****
PS_CFG_HOME/peopletools.properties file has been updated.
You should use the Config Home Refresh feature in PSAdmin
to ensure that all of your domains are current.
Alternatively, you may recreate all of your domains.
Please press any key to continue...
*****

```

This indicates that one of these situations exists:

- The *PS\_CFG\_HOME* that you are working with was used previously from a different *PS\_HOME*. In this case, you should recreate any existing Application Server, Process Scheduler, Search, or PIA domains in this *PS\_CFG\_HOME*.
  - You configured your environment such that *PS\_CFG\_HOME* is the same as *PS\_HOME*. The first time you use PSADMIN to create a domain, it updates the *PS\_CFG\_HOME/peopletools.properties* file. Continue with the next step.
- Specify *1* for Application Server.
  - Specify *4* for Import domain configuration.

```

-----
PeopleSoft Application Server Administration
-----

```

- 1) Administer a domain
- 2) Create a domain
- 3) Delete a domain
- 4) Import domain configuration
- q) Quit

Command to execute (1-4, q): **4**

5. Specify *I* for Import regular domain.

```
-----
PeopleSoft Import Application Server Configuration
-----
```

- 1) Import regular domain
- 2) Import IB Master Configuration
- q) Quit

Command to execute (1-2, q) : **1**

6. Specify whether to import the domain configuration from a file (option 1) or from an existing application domain configuration (option 2).

```
-----
PeopleSoft Import Application Server Configuration
-----
```

- 1) Import from file
- 2) Import from application domain
- q) Quit

Command to execute (1-2, q) :

7. If you selected *1*, provide the full path to the file `psappsrv.cfg`, and then specify the name of the domain you want to create. If you selected *2*, go to the next step.

```
Enter full path to configuration file
:C:\temp\oldconfig\psappsrv.cfg
```

```
Enter domain name to create
:HRDMO
```

8. If you selected *2*, to Import from application domain, provide the full path to the `PS_CFG_HOME` of the existing domain.

If importing from PeopleTools 8.49 or earlier, provide `PS_HOME` for `PS_⇒CFG_HOME`.

```
Enter PS_CFG_HOME of domain you wish to import: C:\Users\JSMITH\psft\pt⇒
\8.56
```

If applicable, choose among the existing application server domains in the specified `PS_CFG_HOME`:

Tuxedo domain list:

- 1) HRDBA
- 2) HRDBB

```
Select domain number to import: 1
```

```
Enter a name for new domain: HRDMO
```

After you create the domain, continue to the next task to verify that the imported configuration parameters are appropriate for the newly created domain. You may need to change the following values:

- **DBName**  
DBName can be the same or different, depending on which database the application server needs to point to.
- **DBType**  
DBType depends on the database type of DBName.
- **UserId and UserPswd**  
UserId and UserPswd are the user's choice.
- **Workstation Listener Port**  
Workstation Listener Port will need to be modified if the old domain will be up and running in the same machine.
- **Jolt Listener Port**  
Jolt Listener Port will also need a different number if the old domain will be up and running in the same machine.
- **Jolt Relay Adapter Listener Port**  
Jolt Relay Adapter Listener Port will need a different number if the old domain will be up and running in the same machine, and will be using Jolt Relay Adapter.

## Task 8A-5-4: Setting Up a Custom Application Server Domain Configuration

The Quick-configure menu is initially displayed when you choose to configure your domain. This menu is intended for the commonly adjusted parameters—those most likely to change from domain to domain. However, there are additional configuration parameters that are not available through the Quick-configure menu. For such configuration parameters, you must use the Custom Configuration option, which you can access from the Quick-configure menu. Feel free to skip this procedure if you have already created and configured your Application Server using the Quick-configure menu and want to move forward.

The following steps assume you will be using PSADMIN to specify parameter settings.

To reconfigure an application server domain:

1. Go to the *PS\_HOME*\appserv directory and run the `psadmin` command.

---

**Note.** Make sure you change the directory from the *PS\_HOME* on the file server to the *PS\_HOME* on the application server.

---

2. Depending on your environment, you may see a message after the initial menu, which indicates that PSADMIN has modified the *PS\_CFG\_HOME*/peopletools.properties file with the current *PS\_HOME* location:

```
*****
PS_CFG_HOME/peopletools.properties file has been updated.
You should use the Config Home Refresh feature in PSAdmin
to ensure that all of your domains are current.
Alternatively, you may recreate all of your domains.
Please press any key to continue...
```

\*\*\*\*\*

This indicates that one of these situations exists:

- The *PS\_CFG\_HOME* that you are working with was used previously from a different *PS\_HOME*. In this case, you should recreate any existing Application Server, Process Scheduler, Search, or PIA domains in this *PS\_CFG\_HOME*.
  - You configured your environment such that *PS\_CFG\_HOME* is the same as *PS\_HOME*. The first time you use PSADMIN to create a domain, it updates the *PS\_CFG\_HOME/peopletools.properties* file. Continue with the next step.
3. Specify *1* for Application Server and press ENTER.
  4. Specify *1* for Administer a domain and press ENTER.
  5. Select the domain to administer and press ENTER.
  6. Specify *4* for Configure this domain and press ENTER.

The option Configure this domain performs the following tasks:

- Shuts down the application server, if it is running. (Shutdown is required since the binary file PSTUXCFG must be deleted and re-created to enable new configuration values. If there are no processes running when shutdown is attempted, an error will be displayed but the script continues on. This is normal.)
  - Initiates an interactive dialog, prompting for configuration parameters.
  - Updates psappsrv.cfg, generates psappsrv.ubb, and internally invokes Tuxedo's tmloadcf executable to create binary file PSTUXCFG used during the domain boot process.
7. Specify *15* for Custom Configuration and press ENTER.
  8. Respond to this prompt:

Do you want to change any config values (y/n):

- Specify *y* to start an interactive dialog to change or examine parameter values, as described in the next step.  
Oracle recommends this option for more experienced users.
  - Specify *n* if you have already edited psappsrv.cfg, skip the next step, and continue with the step to select server process options.
9. Complete the interactive dialog to specify configuration parameters.

Configuration parameters are grouped into sections. For each section, you are asked whether you want to change any parameters in that section, as in the following example:

```

Values for config section - Startup
DBName=
DBType=
UserId=
UserPswd=
ConnectId=
ConnectPswd=
ServerName=
StandbyDBName=
StandbyDBType=
StandbyUserId=
StandbyUserPswd=
InMemoryDBName=
InMemoryDBType=

```



Do you want to change any values (y/n)? [n]: y

- Specify *y* to change any parameter values for the current configuration section displayed.  
You are prompted for each parameter value. Either specify a new value, or press ENTER to accept the default if applicable. After pressing ENTER, you are positioned at the next parameter in that section. When you are done with that section, you are again asked whether you want to re-edit any of the values you changed.
- Enter the user ID and user password that has security to start the application server. All application databases are delivered with one or more application server security users, usually PS or VP1.  
The password you enter is hidden by masking characters.
- The parameters StandbyDBName, StandbyDBType, StandbyUserId, and StandbyUserPswd, are used for a standby database in an Oracle environment.  
See *PeopleTools: Data Management*, "Implementing Oracle Active Data Guard."
- The parameters InMemoryDBName and InMemoryDBType are reserved for internal use.
- The WSL, JSL, and JRAD port numbers, which are found in other sections of the configuration parameters, have default values of 7000, 9000, and 9100, respectively. These values must be unique for each application server domain. You may alter the port values if necessary to ensure that they are unique
- If you do not wish to change any values, specify *n* and you will be prompted for the next configuration section.

---

**Note.** When setting up your application server, make a note of the values you use for Database Name, Application Server Name (the machine name), and JSL Port. You will need to use these same values when installing the PeopleSoft Pure Internet Architecture.

---

See *PeopleTools: System and Server Administration*.

#### 10. Select server process options.

At this point, you will be prompted to select server process options. If this is your initial installation, we suggest you accept the defaults. A message similar to this appears:

```
Setting Log Directory to the default... [PS_SERVDIR\LOGS]
Configuration file successfully created.
Loading new configuration...
```

The message "Loading new configuration" indicates that PSADMIN is generating a binary file named PSTUXCFG, which is used to boot the application server. At this point, your application server should be properly configured.

## Task 8A-5-5: Troubleshooting Common Errors

For troubleshooting help, you can access a log file through the PSADMIN PeopleSoft Domain Administration menu. The following list includes possible errors and troubleshooting tips.

- Use PSADMIN menu option 6 for Edit configuration/log files menu to check for errors in `<PS_CFG_HOME>\appserv\<domain>\LOGS\APPSRV_mmdd.log` and `<PS_CFG_HOME>\appserv\<domain>\LOGS\TUXLOG.mmddy`.
- If a PeopleSoft server such as PSAPPSRV fails, examine your configuration parameters. The failure of the PSAPPSRV process is often signalled by the message "Assume failed"—which means the process has failed to start. Check the SIGNON section for misspelled or invalid database name, an invalid or unauthorized OprId, or ConnectId or ServerName is missing or invalid. Finally, make sure the database connectivity is set correctly.

- If a WSL (or JSL) fails to start, try specifying another port number (it may be in use already by another application server domain process).
- If you are unable to start the BBL, check that your Tuxedo is installed fully and that the directory really exists.
- If the installation includes more than one application server domain on a single machine, before booting the second domain, adjust the REN server configuration to avoid conflict in one of these ways:
  - Use PSADMIN to disable Event Notification (option 8 on the Quick-configure menu) for the second and subsequent app server domains.
  - Change `default_http_port` to a value other than 7180.

## See Also

*PeopleTools: System and Server Administration*

*PeopleTools: MultiChannel Framework*

## Chapter 8B

# Configuring the Application Server on UNIX

This chapter discusses:

- Understanding the Application Server
- Understanding the Application Server Domain Processes
- Prerequisites
- Creating a Wallet for the SSL/TLS Setup
- Preparing the Application Server File System for a PeopleTools-Only Upgrade
- Setting Environment Variables
- Setting Up COBOL for Remote Call
- Verifying Database Connectivity
- Creating, Configuring, and Starting an Initial Application Server Domain

## Understanding the Application Server

---

The information in this chapter is provided to help you configure your PeopleSoft application server.

**Note.** COBOL is not needed for PeopleSoft PeopleTools or for PeopleSoft Applications that contain no COBOL programs. Check the information on My Oracle Support, and your application-specific documentation, for the details on whether your application requires COBOL.

---

Oracle supports application servers for the PeopleSoft installation on several UNIX and Linux operating system platforms. For detailed information, consult the certification information on My Oracle Support. The application server support can be found on the certification pages for PeopleSoft systems.

You can install the application server using either a "logical" or "physical" three-tier configuration.

- Installing the application server on the same machine as the database server is known as a logical three-tier configuration. For your initial PeopleSoft installation, Oracle suggests that you install a logical configuration to simplify setup.
- Installing the application server on a machine separate from the database server machine is known as a physical three-tier configuration.

The configuration and log files for application server domains reside in *PS\_CFG\_HOME*. If you do not set a *PS\_CFG\_HOME* environment variable before beginning the application server configuration, the system installs it in a default location based on the current user's settings, as follows:

```
$HOME/psft/pt/<peopletools_version>
```

See "Preparing for Installation," Defining Installation Locations.

## See Also

"Preparing for Installation," Understanding PeopleSoft Servers and Clients

*PeopleTools: System and Server Administration*, "Using PSADMIN Menus"

*PeopleTools: Data Management*

My Oracle Support, Certifications

"Setting Up the Install Workstation"

"Installing and Compiling COBOL on UNIX"

## Understanding the Application Server Domain Processes

---

On most platforms (IBM AIX, Oracle Solaris, Linux, and HP-UX Itanium) no changes are required from the system defaults, in order to allow the "small" and "development" domains that are shipped with PeopleSoft PeopleTools to boot successfully.

Refer to the performance documentation for guidance in configuring your system to run larger domains. That document describes the suggested minimum kernel settings for running PeopleSoft PeopleTools in a real-world environment.

See PeopleTools Performance Guidelines Red Paper on My Oracle Support (search for the article title).

Permanently changing system-wide parameters generally requires root privileges, and any changes to the kernel configuration of your operating system should be done with care.

If you are installing on HP-UX 11.31 operating systems, be aware that hosts with machine names longer than 8 characters require the HP-UX kernel configuration `uname_overflow` to be set to 0 (zero).

## Prerequisites

---

Before beginning this procedure, you should have completed the following tasks:

- Installed your application server.  
See "Using the PeopleSoft Installer," Planning Your Initial Configuration.
- Installed the supported version of Oracle Tuxedo  
See "Installing Additional Components."
- Set up SSL/TLS protocol for the workstation connection.  
The Secure Socket Layers/Transport Layer Security (SSL/TLS) protocol is supported for Workstation Listener and Jolt Listener ports for the current PeopleSoft PeopleTools release. The application server domain configuration requires a wallet. You can use the delivered wallet or create your own.  
See *PeopleTools: Integration Broker*, "Installing Web Server-Based Digital Certificates."
- Granted authorization to a PeopleSoft user ID to start the application server.  
The database configuration procedure includes a step for setting up the user ID with authorization to start the application server. See the application-specific installation instructions for information on the user IDs for your PeopleSoft application. See the *PeopleTools: Security Administration* product documentation for information on PeopleSoft PeopleTools delivered user profiles.  
See "Creating a Database on UNIX," Running the Database Configuration Wizard.

See "Creating a Database Manually on Microsoft Windows or UNIX," Creating Data Mover Import Scripts.

- Run the following SQL statements on your database server to review and if needed, update the PSCLASSDEFN table:

```
SELECT CLASSID, STARTAPPSERVER FROM PSCLASSDEFN
WHERE CLASSID IN (SELECT OPRCLASS FROM PSOPRCLS WHERE OPRID='<OPRID>')
UPDATE PSCLASSDEFN SET STARTAPPSERVER=1 WHERE CLASSID='<CLASSID>'
```

---

**Note.** Installers typically use VP1 or PS to test the application server. If these users are deleted or their passwords are changed, the application server will no longer be available. To avoid this problem, you can set up a new operator (called PSADMIN or PSASID, for instance) with privileges to start the application server. If you do this, you can use the new operator for your application servers and you won't need to change the password each time VP1 or PS is changed.

---

## Task 8B-1: Creating a Wallet for the SSL/TLS Setup

---

This section discusses:

- Using the Delivered Wallet
- Creating a Wallet with OpenSSL

### Task 8B-1-1: Using the Delivered Wallet

Before you configure the application server to use the SSL/TLS protocol, you need a wallet. Use these instructions to create wallets for the application server and workstation client.

---

**Note.** The term "Oracle Wallet" is sometimes used in the software and documentation, for example in PSADMIN custom configuration, to refer to wallets on all RDBMS. In this context it does not refer to an entity specific to an Oracle RDBMS.

---

You also have the option to use the wallets that are included with the PeopleSoft PeopleTools installation. The default wallet for the application server is named psft and is located in *\$PS\_SERVDIR/security*. When you configure the application server, define the default wallet as follows:

- SEC\_PRINCIPAL\_LOCATION=%PS\_SERVDIR%\security
- SEC\_PRINCIPAL\_NAME=psft

To specify the default wallet for the workstation client:

- SEC\_PRINCIPAL\_LOCATION=PS\_HOME\bin\client\winx86\security
- SEC\_PRINCIPAL\_NAME=wscpsft

The default Java Keystore file used for the SSL/TLS configuration for JSL ports is located in *<PIA\_HOME>\webserv\<DOMAIN\_NAME>\piaconfig\keystore\pskey*. If you change the Keystore password in this file, you must also provide the password in the PIA configuration.properties file at *<PIA\_HOME>\webserv\<DOMAIN\_NAME>\application\peoplesoft\PORTAL.war\WEB\_INF\psftdoc\ps*.

### Task 8B-1-2: Creating a Wallet with OpenSSL

This section discusses:

- Defining OpenSSL Options

- Creating a Server Wallet for the Application Server Domain with OpenSSL
- Creating a Client Wallet for the Workstation Client with OpenSSL
- Adding the Server's Certificate to the Client's Trust Store with OpenSSL

## Defining OpenSSL Options

An example of an OpenSSL command that can be used to create a wallet is as follows.

For more information, see the OpenSSL documentation.

```
openssl pkcs12 -export -out ewallet.p12 -inkey server.key -in server.crt ->
chain -CAfile caCert.crt -passout pass:<password>
```

- `-export`: indicates that a PKCS 12 file is being created
- `-chain`: specifies that an attempt is made to include the entire certificate chain of the user certificate
- `-inkey`: specifies the private key file
- `-in`: specifies the file that contains the user certificate and any other certificates in the certificate chain
- `-CAfile`: specifies a file containing trusted certificates
- `-out`: specifies the output file name, which must be `ewallet.p12` for an Oracle Wallet for PeopleSoft installations.
- `-passin`: specifies the password for the private key file
- `-passout`: specifies the password for the newly created wallet

## Creating a Server Wallet for the Application Server Domain with OpenSSL

This section gives an example of creating a wallet for the application server with the open-source tool OpenSSL.

1. Create a directory, for example `wallet.server`.

For example on Linux or UNIX:

```
mkdir /home/wallet.server
```

2. Change directory to `wallet.server`.

```
cd wallet.server
```

3. Enter the following command:

```
openssl genrsa -out server.key 4096
```

4. Enter the following command.

```
openssl req -new -key server.key -out server.csr -subj <subject>
```

For example:

```
openssl req -new -key server.key -out server.csr -subj '/C=country/CN=>
commonName'
```

The `<subject>` values in this step and step 7 are used to replace the specified data in an input request, and output a modified request. The format for `<subject>` is `'/type0=value0/type1=value1/type2=...'`. Characters must be escaped with a backslash (`\`), and no spaces are skipped. Use the following fields:

- /C — Country
- /CN — Common name
- /L — Location
- /O — Organization
- /OU — Organizational Unit
- /ST — State

5. Enter the following command:

```
openssl genrsa -out caCert.key 4096
```

6. Enter the following command,

```
openssl req -new -x509 -days 1826 -key caCert.key -out caCert.crt -subj =>
<subject>
```

For example:

```
openssl req -new -x509 -days 1826 -key caCert.key -out caCert.crt -subj=>
'/C=US/OU=Class 2 Public Primary Certification Authority/O=My=>
Organization'
```

7. Enter the following command:

```
openssl x509 -req -days 730 -in server.csr -CA caCert.crt -CAkey ca=>
Cert.key -set_serial 01 -out server.crt
```

8. Enter the following command to create the wallet ewallet.p12 and specify the server password:

```
openssl pkcs12 -export -out ewallet.p12 -inkey server.key -in=>
server.crt -chain -CAfile caCert.crt -passout pass:<server_password>
```

## Creating a Client Wallet for the Workstation Client with OpenSSL

This section gives an example of creating a client wallet with the open-source tool OpenSSL.

1. Create a directory, for example wallet.client, and change to that directory.

```
mkdir wallet.client
cd wallet.client
```

2. Copy the server's trust store to the client wallet.

```
cp wallet.server\caCert.crt wallet.client
cp wallet.server\caCert.key wallet.client
```

3. Enter these commands:

```
openssl genrsa -out client.key 4096
```

4. Run this command:

```
openssl req -new -key client.key -out client.csr -subj <subject>
```

For example:

```
openssl req -new -key client.key -out client.csr -subj '/C=country/CN=>
commonName'
```

5. Run this command:

```
openssl x509 -req -days 730 -in client.csr -CA caCert.crt -CAkey ca=>
Cert.key -set_serial 01 -out client.crt
```

6. Enter the following command to create the wallet ewallet.p12 and specify the client password:

```
openssl pkcs12 -export -out ewallet.p12 -inkey client.key -in=>
client.crt -chain -CAfile caCert.crt -passout pass:<client_password>
```

7. Remove the client wallet password:

a. Make a backup copy of the wallet, ewallet.p12:

On Linux or UNIX:

```
cp ewallet.p12 oldwallet.p12
```

b. Run this command:

```
openssl pkcs12 -clcerts -nokeys -in oldwallet.p12 -out=>
certificate.crt -password pass:<client_password> -passin pass:>
<client_password>
```

c. Run this command:

```
openssl pkcs12 -cacerts -nokeys -in oldwallet.p12 -out ca-cert.ca ->
password pass:C<client_password> -passin pass:<client_password>
```

d. Run this command:

```
openssl pkcs12 -nocerts -in oldwallet.p12 -out private.key -password=>
pass:<client_password> -passin pass:<client_password> -passout pass:>
temp
```

e. Run this command:

```
openssl rsa -in private.key -out NewKeyFile.key -passin pass:temp
```

f. Run the command to create the PEM.pem file.

This file is created to copy the public key and root certificates.

On Linux or UNIX:

```
cat certificate.crt ca-cert.ca >PEM.pem
```

g. Run this command:

```
openssl pkcs12 -export -nodes -in PEM.pem -inkey NewKeyFile.key -out=>
ewallet.p12 -passout pass:TrustedCertsOnlyNoPWNeeded
```

## Adding the Server's Certificate to the Client's Trust Store with OpenSSL

To complete the setup, add the application server's certificate to the workstation client's trust store:

1. Change directory.



```
cd %ORACLE_HOME%\jdk\bin
```

2. Add the certificate to the trust store found in the web server directory for the application server domain.

```
keytool -import -file <server_wallet>/<certificate> -alias srvcert ->
keystore <PIA_HOME>\webserv\<DOMAIN_NAME>\piaconfig\keystore\pskey ->
storepass password -noprompt
```

For example, on Linux or UNIX:

```
keytool -import -file wallet.server/caCert.crt -alias srvcert -keystore=>
/home/psft_user/psft/pt/8.56/webserv/ps/piaconfig/keystore/pskey ->
storepass password -noprompt
```

## Task 8B-2: Preparing the Application Server File System for a PeopleTools-Only Upgrade

---

When performing the installation of the separate upgrade *PS\_HOME* (which is different than your old release *PS\_HOME*), you may configure your Application Server at this point in time of the installation. Do not boot your Application Server until directed to do so within the upgrade. If you are installing into an old *PS\_HOME* or *PS\_CFG\_HOME* after completing a PeopleTools-only upgrade, review your old *PS\_HOME* or *PS\_CFG\_HOME* for configuration files that you may want to reuse for the new PeopleSoft PeopleTools release.

### See Also

"Preparing for Installation," Preparing for the PeopleTools-Only Upgrade

## Task 8B-3: Setting Environment Variables

---

Telnet to your UNIX system. Log in and ensure the following environment variables are set appropriately.

**Note.** The environment variables for Tuxedo must be set explicitly; they are not set by running `psconfig.sh`. These can be also set using the `.profile` file in the user's home directory.

- `$TUXDIR` must be set to the correct Oracle Tuxedo installation directory. For example:  

```
TUXDIR=/home/user/Oracle/tuxedo12cR1; export TUXDIR
```
- `$TUXDIR/lib` must be prepended to `LD_LIBRARY_PATH`, `LIBPATH`, or `SHLIB_PATH`, whichever is appropriate for your platform. For example:  

```
LD_LIBRARY_PATH=$TUXDIR/lib:$LD_LIBRARY_PATH; export LD_LIBRARY_PATH
```
- `$TUXDIR/bin` must be prepended to `PATH`. For example:  

```
PATH=$TUXDIR/bin:$PATH; export PATH
```

One method to ensure that the following PeopleSoft environment variables are set is to source `psconfig.sh`. Go to the *PS\_HOME* directory, and enter the following command:

```
. ./psconfig.sh
```

---

**Note.** After running `psconfig.sh`, you can invoke the `psadmin` utility from any location.

---

Alternatively you can make sure the following environment variables are set in the `.profile` file in the user's home directory:

- `$COBDIR` must be set to the Server Express installation directory. For example:  
`COBDIR=/cobol/prod/svrexpr-5.1_wp11-64bit;export COBDIR`
- 

**Note.** If your application does not contain COBOL programs, you do not need to set the `$COBDIR` environment variables.

---

- `$COBDIR/bin` must be appended to the `PATH`; for example:  
`PATH=$PATH:$COBDIR/bin;export PATH`
- `$COBDIR/lib` must be appended to `LD_LIBRARY_PATH`, `LIBPATH`, or `SHLIB_PATH`, whichever is appropriate for your platform. For example:  
`LD_LIBRARY_PATH=$LD_LIBRARY_PATH:$COBDIR/lib;export LD_LIBRARY_PATH`  
`LIBPATH=$LIBPATH:$COBDIR/lib;export LIBPATH`  
`SHLIB_PATH=$SHLIB_PATH:$COBDIR/lib;export SHLIB_PATH`

To set the required DB2/LUW environment, run `db2profile`. Go to the `<DB2 INSTANCE DIRECTORY>/sqlib` directory, and enter the following command:

```
. ./db2profile
```

Ensure that the DB2 instance being used, is a 64-bit instance.

See "Creating a Database on UNIX," Fulfilling PeopleSoft Database Configuration Wizard Prerequisites.

---

## Task 8B-4: Setting Up COBOL for Remote Call

---

Remote Call is a PeopleCode feature that launches a COBOL program from an application server, PeopleCode program or a batch Application Engine PeopleCode program and waits for it to complete execution before continuing. The execution of a COBOL program via Remote Call is completely independent of the Process Scheduler. You need to set up a COBOL runtime environment and COBOL executables on the application server to support Remote Call.

See "Installing and Compiling COBOL on UNIX."

---

**Note.** If your application does not contain COBOL programs, you do not need to purchase or compile COBOL.

---



---

## Task 8B-5: Verifying Database Connectivity

---

Before continuing, it is critical to verify connectivity to the database that the application server domain will use. To verify connectivity, connect to the database server from the application server using the native SQL tool on the application server.

For DB2 for Linux, UNIX, and Windows, use the Command Center.

## Task 8B-6: Creating, Configuring, and Starting an Initial Application Server Domain

---

This section discusses:

- Creating, Configuring, and Starting the Application Server Domain
- Testing the Three-Tier Connection
- Importing an Existing Application Server Domain Configuration
- Setting Up a Custom Application Server Domain Configuration
- Troubleshooting Common Errors

### Task 8B-6-1: Creating, Configuring, and Starting the Application Server Domain

To create, configure, and start the application server domain:

1. Run the `psadmin` command.

You see the PeopleSoft Server Administration menu, as in this example:

```
-----
PeopleSoft Server Administration
-----
PS_CFG_HOME:  /home/JSMITH/peopletools/8.56
PS_HOME:      /home/PT856
PS_APP_HOME:  /home/HR92
```

```
1) Application Server
2) Process Scheduler
3) Search Server
4) Web (PIA) Server
5) Switch Config Home
6) Replicate Config Home
7) Refresh Config Home
q) Quit
```

Command to execute (1-7, q): **1**

2. Depending on your environment, you may see a message after the initial menu, which indicates that PSADMIN has modified the `PS_CFG_HOME/peopletools.properties` file with the current `PS_HOME` location:

```
*****
PS_CFG_HOME/peopletools.properties file has been updated.
You should use the Config Home Refresh feature in PSAdmin
to ensure that all of your domains are current.
Alternatively, you may recreate all of your domains.
Please press any key to continue...
*****
```

This indicates that one of these situations exists:

- The *PS\_CFG\_HOME* that you are working with was used previously from a different *PS\_HOME*. In this case, you should recreate any existing Application Server, Process Scheduler, Search, or PIA domains in this *PS\_CFG\_HOME*.
- You configured your environment such that *PS\_CFG\_HOME* is the same as *PS\_HOME*. The first time you use PSADMIN to create a domain, it updates the *PS\_CFG\_HOME/peopletools.properties* file. Continue with the next step.

3. Specify *1* for Application Server and press ENTER.
4. Specify *2* to Create a domain and press ENTER.

```
-----
PeopleSoft Application Server Administration
-----
1) Administer a domain
2) Create a domain
3) Delete a domain
4) Import domain configuration
q) Quit
```

Command to execute (1-4, q): **2**

5. Specify the domain name.

In this example the domain name is HRDMO:

Please enter name of domain to create : **HRDMO**

Domain names are case sensitive and must be eight characters or less. The domain name is used to create a directory name under the *PS\_CFG\_HOME/appserv* directory.

See the information on *PS\_CFG\_HOME* and server domain configuration in the *PeopleTools: System and Server Administration* product documentation.

6. Specify *4* for small if this is your initial domain installation, press ENTER.

See *PeopleTools: System and Server Administration*.

7. After the system creates the domain, the PeopleSoft Application Server Administration menu appears with a Quick-configure menu similar to this:

```
-----
Quick-configure menu -- domain: HRDMO
-----
```

| Features<br>=====     |       | Settings<br>=====         |
|-----------------------|-------|---------------------------|
| 1) Pub/Sub Servers    | : No  | 17) DBNAME : [HRDMO]      |
| 2) Quick Server       | : No  | 18) DBTYPE : [DB2UNIX]    |
| 3) Query Servers      | : No  | 19) UserId : [VP1]        |
| 4) Jolt               | : Yes | 20) UserPswd : []         |
| 5) Jolt Relay         | : No  | 21) DomainID : [TESTSERV] |
| 6) WSL                | : No  | 22) AddToPATH : [ ]       |
| 7) PC Debugger        | : No  | 23) ConnectID : [people]  |
| 8) Event Notification | : Yes | 24) ConnectPswd : []      |
| 9) MCF Servers        | : No  | 25) DomainConnectPswd: [] |
| 10) Perf Collator     | : No  | 26) WSL Port : [7000]     |
| 11) Analytic Servers  | : Yes | 27) WSL SSL Port : [7010] |
| 12) Domains Gateway   | : No  | 28) JSL Port : [9000]     |

```

13) Push Notifications      : No           29) JSL SSL Port       : [9010]
                                30) JRAD Port          : [9100]

```

```

    Actions

```

```

=====

```

```

14) Load config as shown
15) Custom configuration
16) Edit environment settings
    h) Help for this menu
    q) Return to previous menu

```

HINT: Enter 17 to edit DBNAME, then 14 to load

Enter selection (1-28, h, or q):

---

**Note.** If your installation includes more than one application server domain on a given machine, read the troubleshooting section for more information.

---

See Troubleshooting Common Errors.

- If you need to modify any of the values for these settings, enter the number next to the parameter name, press ENTER, then type the new value, and press ENTER again.

If you need to change any of the features, type the number next to the feature name and press ENTER.

- Configure the WSL to boot by changing option 6 to Yes.

Enter 6, and press ENTER.

- If you intend to use the PeopleSoft Report Distribution system, you must select *Yes* for feature 8, Event Notification.

This enables the REN server, which is used by the "run to window" functionality of the Report Distribution system. *The Report Distribution system, MultiChannel Framework, and Optimization Framework use REN servers.* You must also remember to enter an Authentication Token Domain when installing the PeopleSoft Pure Internet Architecture (PIA).

- If you are configuring an application server domain to support applications based on the PeopleSoft MultiChannel Framework (such as PeopleSoft CRM ERMS), select feature 9, MCF Servers.

See the information on configuring REN Servers in the product documentation.

See *PeopleTools: MultiChannel Framework*.

- Enter the values for the 20) UserPswd and 24) ConnectPswd that you specified during the database configuration.

Reenter each password to verify the value. The password is hidden by masking characters as you type and in the Quick-configure menu.

- If you want to set a Domain Connection password, enter 25 and specify a password of 8 characters or less.

Reenter the password to verify the value. The password is hidden by masking characters as you type and in the Quick-configure menu.

The Domain Connection password is optional. You can specify a value or leave it blank. However, if you do specify a value, you must supply the same value when installing the PeopleSoft Pure Internet Architecture, to ensure the connection to the Application Server.

- To set up the Workstation Listener for SSL/TLS protocol, enter 27 for WSL SSL Port, and specify an available port number.

The default port number is 7010.

15. To set up the Jolt listener for SSL/TLS protocol, enter 29 for JSL SSL Port, and specify an available port number.

The default port number is 9010.

16. Use the custom configuration menu to specify the settings for SSL/TLS encryption and the wallet location.

See *PeopleTools: Integration Broker*, "Installing Web Server-Based Digital Certificates."

- a. To specify the minimum and maximum encryption for SSL/TLS, select 15 for Custom Configuration.

- b. Reply *y*, and press ENTER, at this prompt:

```
Do you want to change any config values (y/n) [n]?
```

- c. Reply *n*, and press ENTER, at this prompt:

```
Do you want to change any values (y/n) [n]?
```

Continue to enter *n*, for No, for all sections until you see the Workstation Listener section, and then answer *y*. (Be aware that there are several sections.)

- d. If necessary, change the values for WSL minimum and maximum encryption to correspond to your installed SSL/TLS cipher. The default minimum is 0 and the default maximum is 256. The maximum is the number of bits that indicates the highest level of encryption possible for the installed SSL/TLS version.

```
Values for config section - Workstation Listener
```

```
Address=%PS_MACH%
Port=7000
SSL Port=7010
WSL Min Encryption=0
WSL Max Encrytion=256
Min Handlers=1
Max Handlers=2
Max Clients per Handler=40
Client Cleanup Timeout=60
Init Timeout=5
Tuxedo Compression Threshold=5000
```

- e. Accept the defaults for the next series of questions until asked if you want Oracle Wallet configured. In this case, answer *y*.

- f. Specify the values for the Oracle Wallet location, name, and password, or accept the defaults.

You can use an existing wallet that you created, or use the default wallet found in the security directory.

```
Values for config section - Oracle Wallet
```

```
SEC_PRINCIPAL_LOCATION=%PS_SERVDIR%\security
SEC_PRINCIPAL_NAME=psft
SEC_PRINCIPAL_PASSWORD=
```

- g. Accept the defaults for the next series of questions until asked if you want the JOLT Listener configured. In this case, answer *y*

- h. If necessary, change the values for JSL minimum and maximum encryption to correspond to your installed SSL/TLS cipher. The default minimum is 0 and the default maximum is 256. The maximum is the number of bits that indicates the highest level of encryption possible for the installed SSL/TLS version.

```
Values for config section - JOLT Listener
```

```
Address=%PS_MACH%
Port=9000
SSL Port=9010
```

```
JSL Min Encryption=0
JSL Max Encryption=256
Min Handlers=1
Max Handlers=2
Max Clients per Handler=40
Client Cleanup Timeout=10
Init Timeout=5
Client Connection Mode=ANY
Jolt Compression Threshold=1000000
```

- i. Accept the default for the remaining questions; the configuration will load automatically.

17. If you are installing a REN server:

- a. Enter *15* for Custom configuration.
- b. Reply *y*, and press ENTER, at this prompt:  
Do you want to change any config values (y/n) [n]?
- c. Reply *n*, and press ENTER, at this prompt:  
Do you want to change any values (y/n) [n]?

Continue to enter *n*, for No, for all sections until you see the PSRENSRV section, and then answer *y*. (Be aware that there are several sections.)

- d. Leave the defaults for all settings except for default\_auth\_token, which you should set to the domain name for your web server.

---

**Note.** The default\_auth\_token setting should be identical to the Authentication Token Domain that you set during PIA installation.

---

See "Setting Up the PeopleSoft Pure Internet Architecture in GUI Mode."

- e. Accept the defaults for the next series of questions until asked if you want Event Notification configured. In this case, answer *y*.
- f. Accept the default for the remaining questions; the configuration will load automatically.

18. If you are not installing a REN server, after you update the settings you can load the configuration by entering *14*, for Load config as shown, from the Quick-configure menu.

19. To start the application server (whether you installed a REN server or not), select *1*, Boot this domain, from the PeopleSoft Domain administration menu.

20. Select *1*, Boot (Serial Boot) or *2*, Parallel Boot, from the PeopleSoft Domain Boot Menu.

---

**Note.** The messages you see and the number of processes started will depend on the options you chose during configuration.

---

21. If you plan to continue with PIA installation and testing, do not shut down the application server at this time.

22. If you want to shut down your PeopleSoft application server domain later, follow these simple steps:

- a. From the PeopleSoft Domain Administration menu, enter *2* for Domain shutdown menu.
- b. From the PeopleTools Domain Shutdown Menu, enter *1* for Normal shutdown.

You see messages about the application server processes being shut down. The number of processes stopped will vary depending on the number of processes that started when you booted the domain.

- c. Enter *q* to quit the PeopleSoft Domain Administration Menu.

## Task 8B-6-2: Testing the Three-Tier Connection

If you get an error message when you try to sign in to the Application Server in Application Designer (that is, three-tier mode), it may be due to an incorrect server name or port number, because the database server is not running, or because the application server was not booted. To test a three-tier connection from the PeopleTools Development Environment (the Windows-based client):

1. Start Configuration Manager with one of these methods:
  - On Microsoft Windows 7, select Start, Programs, PeopleTools 8.56, Configuration Manager.
  - On Microsoft Windows 8 or 2012 R2, access the Apps screen and navigate to PeopleTools 8.56, Configuration Manager.
  - Run `PS_HOME\bin\client\winx86\pscfg.exe`.
2. Select the Profile Tab. Highlight Default and select Edit.
3. On the Edit Profile dialog box, select *Application Server* as the Connection Type.
4. Enter values for these parameters:

- Application Server Name
- Machine Name or IP Address
- Port Number (WSL)

Enter the WSL port that you specified when creating the application server domain. If you want to use the SSL/TLS protocol for connection, enter the WSL SSL port number (the default is 7010). If you want to use the LLE protocol, enter the non-SSL WSL port (the default is 7000).

- Domain Connection Password and Domain Connection Password (confirm)

Specify a value for the password, and repeat your entry for confirmation. The password must be 8 characters or less.

This password is optional. If you did not set the Domain Connection Password in Configuration Manager or in the Application Server configuration, leave it blank. If you specify a password, you must supply the same password during the PeopleSoft Pure Internet Architecture installation for a successful connection between the Application Server and PeopleSoft Pure Internet Architecture.

See the *PeopleTools: System and Server Administration* product documentation for information on using PeopleSoft Configuration Manager and PSADMIN.

- Wallet Location

Enter the location that you specified for the client wallet. The default location is `%PS_HOME%/bin/client/winx86/security`.

- Wallet Name

Enter the name for the client wallet that you specified. The default name is `wscpsft`.

5. Select Set to add the definition to the list and select OK to close the dialog box.
6. On the Configuration Manager dialog box, select the Startup tab.
7. Select *Application Server* from the Database Type list. Your application server name should be displayed.
8. Enter the values for User ID, Connect ID, and password.
9. Click OK.



---

**Note.** Confirm that the application server is running by booting it from PSADMIN. Select *1*, Boot this domain, from the PeopleSoft Domain administration menu. Select option *1*, Boot (Serial Boot) or *2*, Parallel Boot, from the PeopleSoft Domain Boot menu.

---

10. Start Application Designer with one of these methods:

- On Microsoft Windows 7, select Start, Programs, PeopleTools 8.56, Application Designer.
- On Microsoft Windows 8 or 2012 R2, access the Apps screen and navigate to PeopleTools 8.56, Application Designer.
- Run `PS_HOME\bin\client\winx86\pside.exe`.

11. In the PeopleSoft Signon dialog box:

- Select *Application Server* as the Connection Type.
- Confirm that the Application Server Name is correct.
- Enter values for User ID and password.

12. Select OK to open Application Designer.

If you see the following error message when you try to sign in to the Application Server in Application Designer:

```
Network API: "Could not connect to application server 'Application Server=>
Name' Make sure the PeopleTools authentication server (PSAUTH) is booted."
```

This may indicate a problem with the Domain Connection Password. For example, if the password set in the Application Server configuration file does not match the value in Configuration Manager, you may get this error message when you sign in to Application Designer in three-tier mode. Check the Application Server logs for more information.

## Task 8B-6-3: Importing an Existing Application Server Domain Configuration

If you have an existing application server configuration for a previous PeopleSoft PeopleTools release, you can import it to create a new domain. You can import an existing domain configuration by specifying a file or by specifying the path to an existing domain. To import from a file, you must use the `psappsrv.cfg` file found inside an existing application server domain folder (you must specify the full path to `psappsrv.cfg`). This file can be located anywhere in the file system, but must be named `psappsrv.cfg`. To import from an existing domain configuration that you created in the current PeopleSoft PeopleTools release, you must specify `PS_CFG_HOME` and the name of an existing application server domain. (If you are importing a domain from a release before PeopleSoft PeopleTools 8.50, note that the domains were created in `PS_HOME`, and that is the path that you should provide.)

To import an existing application server domain configuration:

1. Run the `psadmin` command.

You see the PeopleSoft Server Administration menu, as in this example:

```
-----
PeopleSoft Server Administration
-----
PS_CFG_HOME:  /home/JSMITH/peopletools/8.56
PS_HOME:      /home/PT856
PS_APP_HOME:  /home/HR92
```

- 1) Application Server
- 2) Process Scheduler
- 3) Search Server
- 4) Web (PIA) Server
- 5) Switch Config Home
- 6) Replicate Config Home
- 7) Refresh Config Home
- q) Quit

Command to execute (1-7, q): **1**

The PS\_CONFIG\_HOME location, also referred to as Config Home, corresponds to the current working directory. For information on how Config Home is set, see the *PeopleTools: System and Server Administration* product documentation.

- 2. Depending on your environment, you may see a message after the initial menu, which indicates that PSADMIN has modified the PS\_CFG\_HOME/peopletools.properties file with the current PS\_HOME location:

```
*****
PS_CFG_HOME/peopletools.properties file has been updated.
You should use the Config Home Refresh feature in PSAdmin
to ensure that all of your domains are current.
Alternatively, you may recreate all of your domains.
Please press any key to continue...
*****
```

This indicates that one of these situations exists:

- The PS\_CFG\_HOME that you are working with was used previously from a different PS\_HOME. In this case, you should recreate any existing Application Server, Process Scheduler, Search, or PIA domains in this PS\_CFG\_HOME.
- You configured your environment such that PS\_CFG\_HOME is the same as PS\_HOME. The first time you use PSADMIN to create a domain, it updates the PS\_CFG\_HOME/peopletools.properties file. Continue with the next step.

- 3. Specify *1* for Application Server.
- 4. Specify *4* for Import domain configuration.

```
-----
PeopleSoft Application Server Administration
-----
1) Administer a domain
2) Create a domain
3) Delete a domain
4) Import domain configuration
q) Quit
```

Command to execute (1-4, q): **4**

- 5. Specify *1* for Import regular domain.

```
-----
PeopleSoft Import Application Server Configuration
-----
```

- 1) Import regular domain
- 2) Import IB Master Configuration
- q) Quit

Command to execute (1-2, q) : **1**

6. Specify whether to import the domain configuration from a file (option 1) or from an existing application domain configuration (option 2).

```
-----
PeopleSoft Import Application Server Configuration
-----
```

- 1) Import from file
- 2) Import from application domain
- q) Quit

Command to execute (1-2, q) :

7. If you selected 1, provide the full path to the file `psappsrv.cfg`, and then specify the name of the domain you want to create. If you selected 2, go to the next step.

```
Enter full path to configuration file
:/home/oldconfig/psappsrv.cfg
```

```
Enter domain name to create
:HRDMO
```

8. If you selected 2, to Import from application domain, provide the full path to the `PS_CFG_HOME` of the existing domain.

If importing from PeopleTools 8.49 or earlier, provide `PS_HOME` for `PS_⇒CFG_HOME`.

```
Enter PS_CFG_HOME of domain you wish to import: /home/JSMITH⇒
/peopletools/8.56
```

If applicable, choose among the existing application server domains in the specified `PS_CFG_HOME`:

```
Tuxedo domain list:
```

- 1) HRDBA
- 2) HRDBB

```
Select domain number to import: 1
```

```
Enter a name for new domain: HRDMO
```

After you create the domain, continue to the next task to verify that the imported configuration parameters are appropriate for the newly created domain. You may need to change the following values:

- **DBName**  
DBName can be the same or different, depending on which database the application server needs to point to.
- **DBType**  
DBType depends on the database type of DBName.
- **UserId and UserPswd**  
UserId and UserPswd are the user's choice.

- Workstation Listener Port

Workstation Listener Port will need to be modified if the old domain will be up and running in the same machine.

- Jolt Listener Port

Jolt Listener Port will also need a different number if the old domain will be up and running in the same machine.

- Jolt Relay Adapter Listener Port

Jolt Relay Adapter Listener Port will need a different number if the old domain will be up and running in the same machine, and will be using Jolt Relay Adapter.

## Task 8B-6-4: Setting Up a Custom Application Server Domain Configuration

The Quick-configure menu is initially displayed when you choose to configure your domain. This menu is intended for the commonly adjusted parameters—those most likely to change from domain to domain. However, there are additional configuration parameters that are not available through the Quick-configure menu. For such configuration parameters, you must use the Custom Configuration option, which you can access from the Quick-configure menu. Feel free to skip this procedure if you have already created and configured your Application Server using the Quick-configure menu and want to move forward.

The following steps assume you will be using PSADMIN to specify parameter settings.

To reconfigure an application server domain:

1. Run the `psadmin` command.
2. Depending on your environment, you may see a message after the initial menu, which indicates that PSADMIN has modified the `PS_CFG_HOME/peopletools.properties` file with the current `PS_HOME` location:

```
*****
PS_CFG_HOME/peopletools.properties file has been updated.
You should use the Config Home Refresh feature in PSAdmin
to ensure that all of your domains are current.
Alternatively, you may recreate all of your domains.
Please press any key to continue...
*****
```

This indicates that one of these situations exists:

- The `PS_CFG_HOME` that you are working with was used previously from a different `PS_HOME`. In this case, you should recreate any existing Application Server, Process Scheduler, Search, or PIA domains in this `PS_CFG_HOME`.
  - You configured your environment such that `PS_CFG_HOME` is the same as `PS_HOME`. The first time you use PSADMIN to create a domain, it updates the `PS_CFG_HOME/peopletools.properties` file. Continue with the next step.
3. Specify `1` for Application Server and press ENTER.
  4. Specify `1` for Administer a domain and press ENTER.
  5. Select the domain to administer and press ENTER.
  6. Specify `4` for Configure this domain and press ENTER.

The option Configure this domain performs the following tasks:

- Shuts down the application server, if it is running. (Shutdown is required since the binary file `PSTUXCFG` must be deleted and re-created to enable new configuration values. If there are no processes running when

shutdown is attempted, an error will be displayed but the script continues on. This is normal.)

- Initiates an interactive dialog, prompting for configuration parameters.
- Updates `psappsrv.cfg`, generates `psappsrv.ubb`, and internally invokes Tuxedo's `tmloadcf` executable to create binary file `PSTUXCFG` used during the domain boot process.

7. Specify `15` for Custom Configuration and press ENTER.

8. Respond to this prompt:

```
Do you want to change any config values (y/n):
```

- Specify `y` to start an interactive dialog to change or examine parameter values, as described in the next step.

Oracle recommends this option for more experienced users.

- Specify `n` if you have already edited `psappsrv.cfg`, skip the next step, and continue with the step to select server process options.

9. Complete the interactive dialog to specify configuration parameters.

Configuration parameters are grouped into sections. For each section, you are asked whether you want to change any parameters in that section, as in the following example:

```
Values for config section - Startup
```

```
DBName=
DBType=
UserId=
UserPswd=
ConnectId=
ConnectPswd=
ServerName=
StandbyDBName=
StandbyDBType=
StandbyUserId=
StandbyUserPswd=
InMemoryDBName=
InMemoryDBType=
```

```
Do you want to change any values (y/n)? [n]: y
```

- Specify `y` to change any parameter values for the current configuration section displayed.

You are prompted for each parameter value. Either specify a new value, or press ENTER to accept the default if applicable. After pressing ENTER, you are positioned at the next parameter in that section. When you are done with that section, you are again asked whether you want to re-edit any of the values you changed.

- Enter the user ID and user password that has security to start the application server. All application databases are delivered with one or more application server security users, usually PS or VP1.

The password you enter is hidden by masking characters.

- The parameters `StandbyDBName`, `StandbyDBType`, `StandbyUserId`, and `StandbyUserPswd`, are used for a standby database in an Oracle environment.

See *PeopleTools: Data Management*, "Implementing Oracle Active Data Guard."

- The parameters `InMemoryDBName` and `InMemoryDBType` are reserved for internal use.
- The WSL, JSL, and JRAD port numbers, which are found in other sections of the configuration parameters, have default values of 7000, 9000, and 9100, respectively. These values must be unique for each application server domain. You may alter the port values if necessary to ensure that they are unique

- If you do not wish to change any values, specify *n* and you will be prompted for the next configuration section.

---

**Note.** When setting up your application server, make a note of the values you use for Database Name, Application Server Name (the machine name), and JSL Port. You will need to use these same values when installing the PeopleSoft Pure Internet Architecture.

---

See *PeopleTools: System and Server Administration*.

#### 10. Select server process options.

At this point, you will be prompted to select server process options. If this is your initial installation, we suggest you accept the defaults. A message similar to this appears:

```
Setting Log Directory to the default... [PS_SERVDIR/LOGS]
Configuration file successfully created.
Loading new configuration...
```

The message "Loading new configuration" indicates that PSADMIN is generating a binary file named PSTUXCFG, which is used to boot the application server. At this point, your application server should be properly configured.

## Task 8B-6-5: Troubleshooting Common Errors

For troubleshooting help, you can access a log file through the PSADMIN PeopleSoft Domain Administration menu. The following list includes possible errors and troubleshooting tips.

- Use the PSADMIN PeopleSoft Domain Administration menu option 6 for Edit configuration/log files menu to check for errors in `<PS_CFG_HOME>/appserv/<domain>/LOGS/APPSRV_mmdd.LOG` and `<PS_CFG_HOME>/appserv/<domain>/LOGS/TUXLOG.mmddyy`.
- If a PeopleSoft server such as PSAPPSRV fails, examine your configuration parameters. The failure of the PSAPPSRV process is often signalled by the message "Assume failed"—which means the process has failed to start. Check the SIGNON section for misspelled or invalid database name, an invalid or unauthorized OprId, or ConnectId or ServerName is missing or invalid. Finally, make sure the database connectivity is set correctly.
- If a WSL (or JSL) fails to start, try specifying another port number (it may be in use already by another application server domain process).
- If you are unable to start the BBL, check that your Tuxedo is installed fully and that the directory really exists.
- If the installation includes more than one application server domain on a single machine, before booting the second domain, adjust the REN server configuration to avoid conflict in one of these ways:
  - Use PSADMIN to disable Event Notification (option 8 on the Quick-configure menu) for the second and subsequent app server domains.
  - Change `default_http_port` to a value other than 7180.
- Check that you do not have older Tuxedo releases prepended in your PATH or runtime library (LIBPATH, SHLIB\_PATH or LD\_LIBRARY\_PATH, depending on the UNIX operating system).

## See Also

*PeopleTools: System and Server Administration*

*PeopleTools: MultiChannel Framework*

## Chapter 9A

# Setting Up the PeopleSoft Pure Internet Architecture in GUI Mode

This chapter discusses:

- Understanding PeopleSoft Pure Internet Architecture
- Using Authentication Domains in the PeopleSoft Pure Internet Architecture Installation
- Preparing the PeopleSoft Pure Internet Architecture File System for a PeopleTools-Only Upgrade
- Installing the PeopleSoft Pure Internet Architecture on Oracle WebLogic in GUI Mode
- Installing the PeopleSoft Pure Internet Architecture on IBM WebSphere in GUI Mode
- Configuring the SSL/TLS Port for JSL
- Testing and Administering the PeopleSoft Pure Internet Architecture Installation
- Completing Post-Installation Steps

## Understanding PeopleSoft Pure Internet Architecture

---

This chapter explains how to install and configure the components of the PeopleSoft Pure Internet Architecture (PIA) in GUI mode. It includes instructions for installing the PeopleSoft files on Oracle WebLogic and IBM WebSphere. Only complete the instructions for the web server product that you installed.

---

**Note.** See the chapter "Setting Up the PeopleSoft Pure Internet Architecture in Console Mode" for instructions on installing in silent mode on Microsoft Windows.

---

See "Installing Web Server Products."

The setup program for the PeopleSoft Pure Internet Architecture is installed to the web server machine when you run the PeopleSoft Installer and select the PeopleSoft Web Server option.

See "Using the PeopleSoft Installer."

Oracle only supports customer installations that use web servers that are certified for PeopleSoft PeopleTools. *You must install the web server before you install the PeopleSoft Pure Internet Architecture.* Before you install the PeopleSoft Pure Internet Architecture, you must also have configured an application server, as described in the previous chapter.

The location where you install the PeopleSoft Pure Internet Architecture is referred to in this documentation as *PIA\_HOME*. You can specify different locations for *PS\_HOME* and *PIA\_HOME*. After you complete the PeopleSoft Pure Internet Architecture installation, you can locate the installation files in the directory *PIA\_HOME/webserv*.

For PeopleSoft PeopleTools 8.51 and later, if you are setting up the PeopleSoft Pure Internet Architecture on a Microsoft Windows platform, the directory and path that you specify for *PIA\_HOME* may include spaces. However, parentheses in the directory name (for example, "C:\Program Files (x86)") are *not* allowed for *PIA\_HOME*.

See "Preparing for Installation," Defining Installation Locations.

If your web server is on a different machine than your application server, you need to make sure you have JRE installed on your web server to run the PeopleSoft Pure Internet Architecture installation.

The initial PeopleSoft Pure Internet Architecture setup automatically creates the default PeopleSoft site named *ps*. In subsequent PeopleSoft Pure Internet Architecture setups, change the site name from *ps* to a unique value. We recommend using the database name. This is handy for easy identification and ensures that the database web server files are installed in a unique web site.

The URL that you use to invoke the PeopleSoft Pure Internet Architecture must conform to ASN.1 specifications. That is, it may contain only alphanumeric characters, dots ("."), or dashes ("-"). The URL must not begin or end with a dot or dash, or contain consecutive dots (".."). If the URL includes more than one portion, separated by dots, do not use a number to begin a segment if the other segments contain letters. For example, "mycompany.second.country.com" is correct, but "mycompany.2nd.country.com" is wrong.

Review the following additional notes before beginning the PeopleSoft Pure Internet Architecture installation:

- If you want to connect between multiple application databases, you need to implement single signon.
- If the PeopleSoft Pure Internet Architecture installation encounters an error, it will indicate which log files to refer to.

See "Installing Web Server Products."

- The machine on which you run the PeopleSoft Pure Internet Architecture install must be running in *256 color mode*. This is not necessary for UNIX or console mode.
- When installing on Microsoft Windows, change the font size to the default value.

If you use the installer with a non-default font size, some of the fields on the installer windows may appear with an incorrect length. To change the font size:

1. Right-click the desktop and select Personalize.
2. Click Adjust font size (DPI).
3. Select the default, 96 DPI.

The PeopleSoft Pure Internet Architecture installation includes the following products:

- *PeopleSoft Pure Internet Architecture*. This product is the centerpiece of the PeopleSoft architecture that enables users to work on a machine with only a supported browser installed. This option installs the servlets required for deploying PeopleSoft Applications and for the PeopleSoft portal. The portal packs and PeopleSoft Portal Solutions have their own installation instructions, which are available on My Oracle Support. For an overview of the various types of portals, consult the *PeopleTools: Portal Technology* product documentation.
- *PeopleSoft Report Repository*. This product works in conjunction with Process Scheduler to allow report distribution over the web.
- *PeopleSoft Integration Gateway*. This product is the entry and exit point for all messages to and from the Integration Broker. Its Java-based Connector architecture allows asynchronous and synchronous messages to be sent over a variety of standard protocols, many that are delivered at install, or through custom connectors.

---

**Important!** For PeopleSoft PeopleTools 8.50 and later, review the product documentation concerning security properties for Integration Gateway. When setting the properties in the `integrationGateways.properties` file, the property `secureFileKeystorePasswd` must be encrypted, and the `secureFileKeystorePath` must be set.

---

See *PeopleTools: Integration Broker Administration*.



- *PeopleSoft CTI Console*. This product works in conjunction with CTI vendor software to enable call center agents to take advantage of browser-based teleset management and automatic population of application pages with relevant data associated with incoming calls, such as customer or case details.

See *PeopleTools: MultiChannel Framework*.

- *Environment Management Hub*. The Environment Management hub is a web application that is installed with the PeopleSoft Pure Internet Architecture and portal. It is started along with the rest of the web applications when the user boots the web server. You cannot start the Environment Management Hub on a server that is configured to run HTTPS; in other words, if you plan to run Environment Management, your PIA server needs to be configured in HTTP mode.

See *PeopleTools: Change Assistant and Update Manager*.

## See Also

*PeopleTools: Security Administration*

*PeopleTools: System and Server Administration*

"Using the PeopleSoft Installer," Verifying Necessary Files for Installation on Windows

## Using Authentication Domains in the PeopleSoft Pure Internet Architecture Installation

---

You have the option to specify an authentication domain when you install the PeopleSoft Pure Internet Architecture on Oracle WebLogic or IBM WebSphere.

**Note.** The authentication domain was referred to as the Authentication Token Domain in previous releases, and that term is still seen in the software.

When an authentication domain is specified during the PeopleSoft Pure Internet Architecture installation, that value gets used as the Cookie domain in the web server configuration. The main requirements when setting a cookie domain are:

- The host must have a fully qualified domain name (FQDN). The requirement that you must have a domain name does not imply that you must have a DNS, but you do need some type of naming service such as DNS or some managed `..\etc\hosts` file that contains a list of the servers with their domain name.
- The cookie domain value being set must begin with a dot (`.ps.com` is valid, `ps.com` is NOT valid).
- The cookie domain value being set must contain at least 1 embedded dot (`.ps.com` is valid, `.corp.ps.com` is valid, `.com` is NOT valid).
- The cookie domain value can only be a single domain name. It cannot be a delimiter-separated list of domains.

By default, the browser only sends cookies back to the machine that set the cookie. So if web server `crm.yourdomain.com` sets a cookie, the browser will only send it back there. You can make the browser send the single signon cookie to all servers at `yourdomain.com` by typing your domain name in the Authentication Token Domain list box of web server `crm`.

Specifying the authentication domain may be necessary in certain cases. For example, if you plan to use the PeopleSoft portal technology, be sure to read the supporting documentation on configuring the portal environment, to determine whether setting the authentication domain is required for correct operation.

See *PeopleTools: Portal Technology*.

Specify an authentication domain if you plan to run a REN Server. REN Servers are required for PeopleSoft MultiChannel Framework, Reporting, and some PeopleSoft CRM applications supported by PeopleSoft MultiChannel Framework.

See *PeopleTools: MultiChannel Framework*.

If you use the PeopleSoft Mobile Application Platform (MAP), you must specify the same authentication domain during the PeopleSoft Pure Internet Architecture installation, for MAP, and for Integration Broker and integration hubs.

See *PeopleTools: Mobile Application Platform*.

See *PeopleTools: Integration Broker*.

## **Task 9A-1: Preparing the PeopleSoft Pure Internet Architecture File System for a PeopleTools-Only Upgrade**

---

When performing the installation of the PeopleSoft Pure Internet Architecture system using the separate upgrade *PS\_HOME* (which is different than your old release *PS\_HOME*), you may install and configure your PeopleSoft Pure Internet Architecture system at this point in time of the installation, but do not start your PeopleSoft Pure Internet Architecture system until directed to do so within the upgrade.

If you are installing into an existing *PS\_HOME* or *PIA\_HOME* after completing a PeopleTools-only upgrade, perform the following instructions to remove any obsolete files.

See "Preparing for Installation," Preparing for the PeopleTools-Only Upgrade.

Stop the web server before performing the PeopleSoft Pure Internet Architecture installation or uninstallation.

Depending on your web server platform, complete the following steps to clean up previous PeopleSoft Pure Internet Architecture sites:

- Oracle WebLogic

Shut down Oracle WebLogic and follow the uninstallation instructions in the old release PeopleSoft PeopleTools installation guide for your database platform.

Alternatively, delete the contents of one of the following directories:

- For PeopleSoft PeopleTools 8.43.x or earlier: `<weblogic_home>\wlserver6.1\config\<domain_name>|*`
- For PeopleSoft PeopleTools 8.44.x to 8.49.x: `<PS_HOME>\webserv\<domain_name>|*`
- For PeopleSoft PeopleTools 8.50.x or later: `<PIA_HOME>\webserv\<domain_name>|*`

- IBM WebSphere

Shut down IBM WebSphere and follow the uninstallation instructions in the old release PeopleSoft PeopleTools installation guide for your database platform.

## **Task 9A-2: Installing the PeopleSoft Pure Internet Architecture on Oracle WebLogic in GUI Mode**

---

This section discusses:

- Prerequisites
- Installing the PeopleSoft Pure Internet Architecture on a New Oracle WebLogic Domain
- Installing the PeopleSoft Pure Internet Architecture on an Existing Oracle WebLogic Domain

- Uninstalling the PeopleSoft Pure Internet Architecture on Oracle WebLogic

## Prerequisites

This section describes how to install the PeopleSoft Pure Internet Architecture on Oracle WebLogic. Before installing the PeopleSoft Pure Internet Architecture (PIA) on Oracle WebLogic, you must have installed the Oracle WebLogic software. PeopleSoft PeopleTools 8.56 supports Java 8 enabled 64-bit Oracle WebLogic 12.2.1. See "Installing Web Server Products," Installing Oracle WebLogic.

See the *PeopleTools: System and Server Administration* product documentation for more information on working with Oracle WebLogic.


## Task 9A-2-1: Installing the PeopleSoft Pure Internet Architecture on a New Oracle WebLogic Domain

Use these instructions to install the PeopleSoft Pure Internet Architecture on a new Oracle WebLogic domain. See the next section to install on an existing Oracle WebLogic domain.

1. Go to `PS_HOME\setup\PsmPPIAInstall` and run `setup.bat`.

See "Using the PeopleSoft Installer," Running the PeopleSoft Installer, for setup command options.

2. Click Next on the Welcome to the InstallAnywhere Wizard for PeopleSoft Internet Architecture window. The window displays the PeopleSoft PeopleTools version, 8.56 in this example, and includes this note: "If installing onto a Oracle WebLogic Server, make sure to shutdown any running web servers to avoid web server corruption."

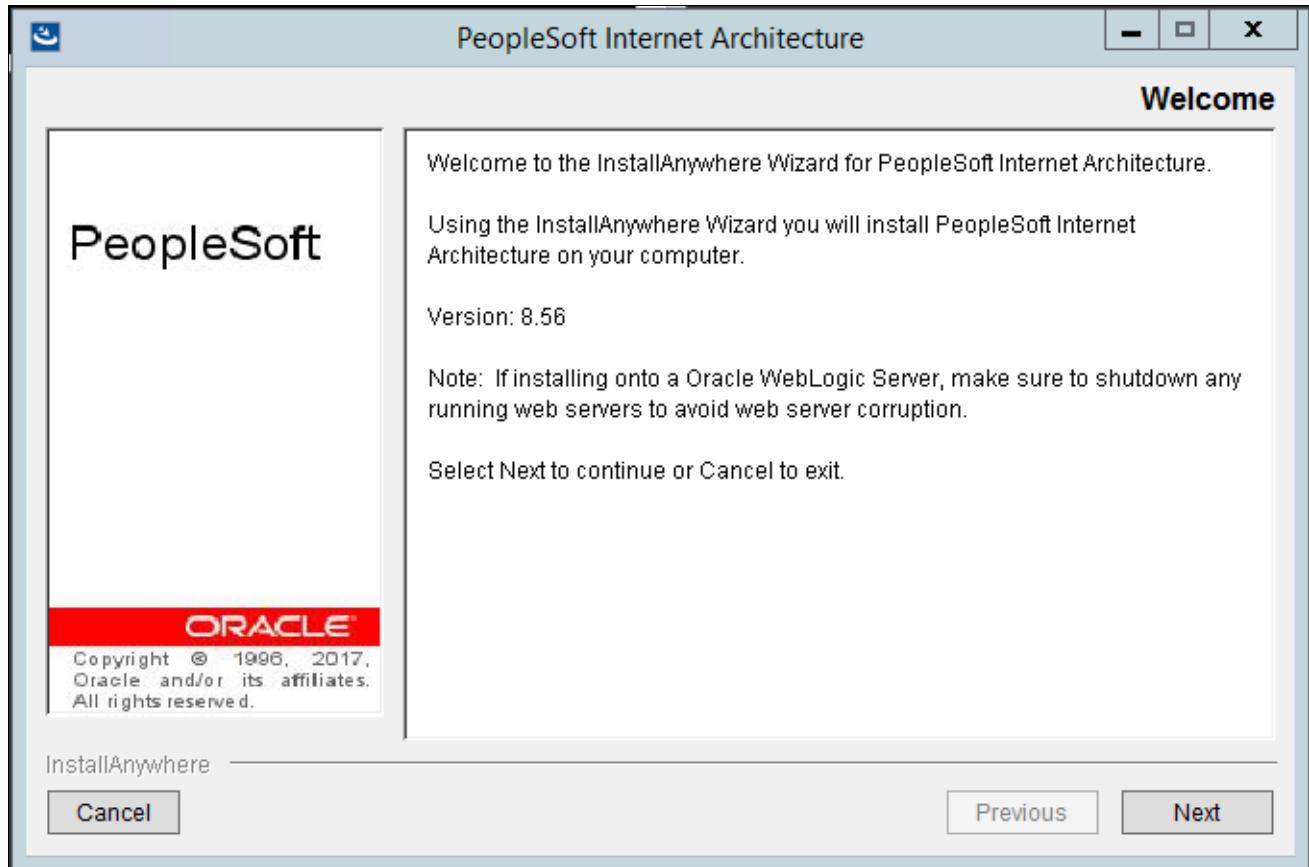


PeopleSoft Internet Architecture Welcome window

- 3. Enter the location where you want to install the PeopleSoft Pure Internet Architecture, referred to in this documentation as *PIA\_HOME*.


In this example, the directory is C:\Users\psftuser\psft\pt\8.56. The default location for *PIA\_HOME* is the same as *PS\_CFG\_HOME*.

See "Preparing for Installation," Planning Your Initial Configuration.

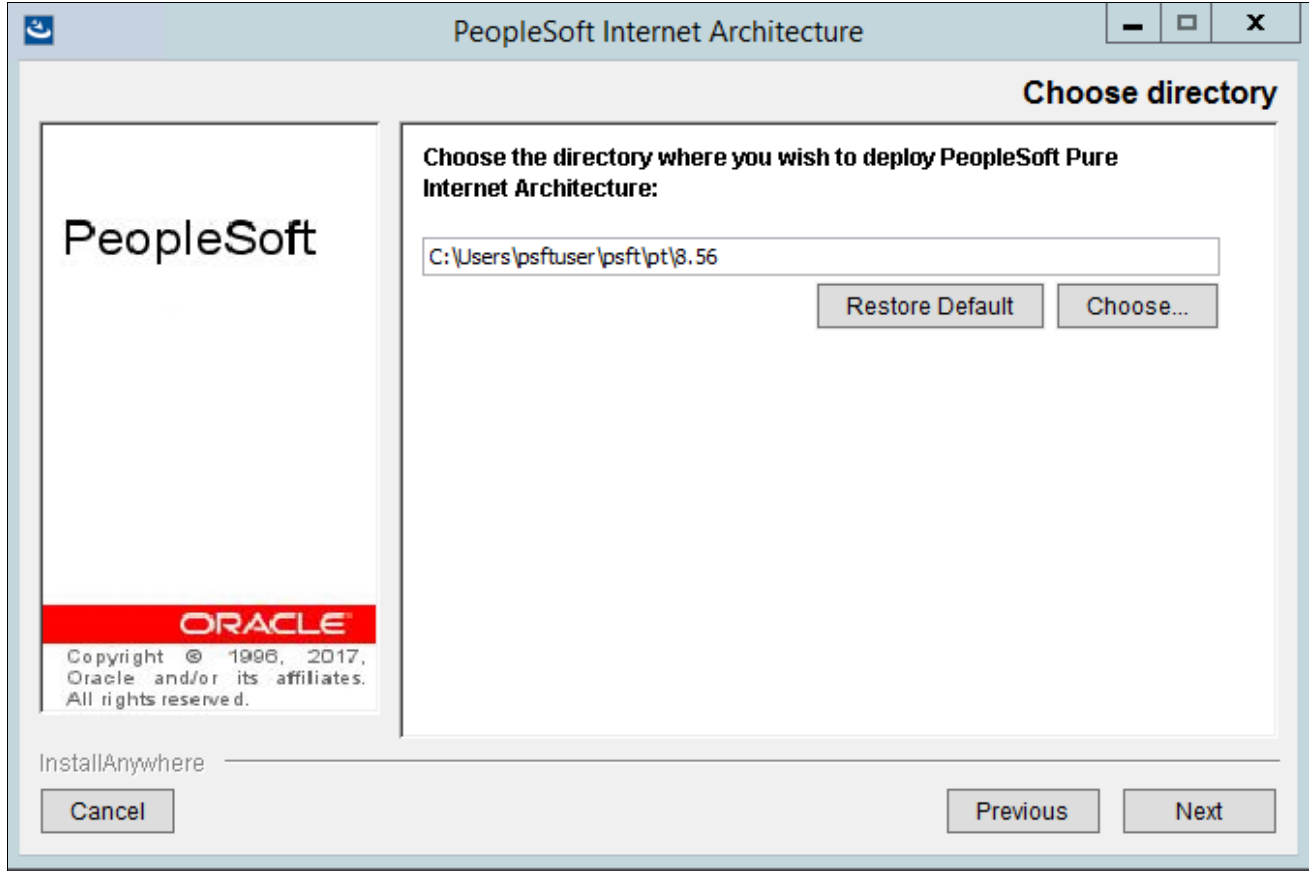

PeopleSoft Internet Architecture Choose directory window

4. Select Oracle WebLogic Server as in this example, and then click Next.

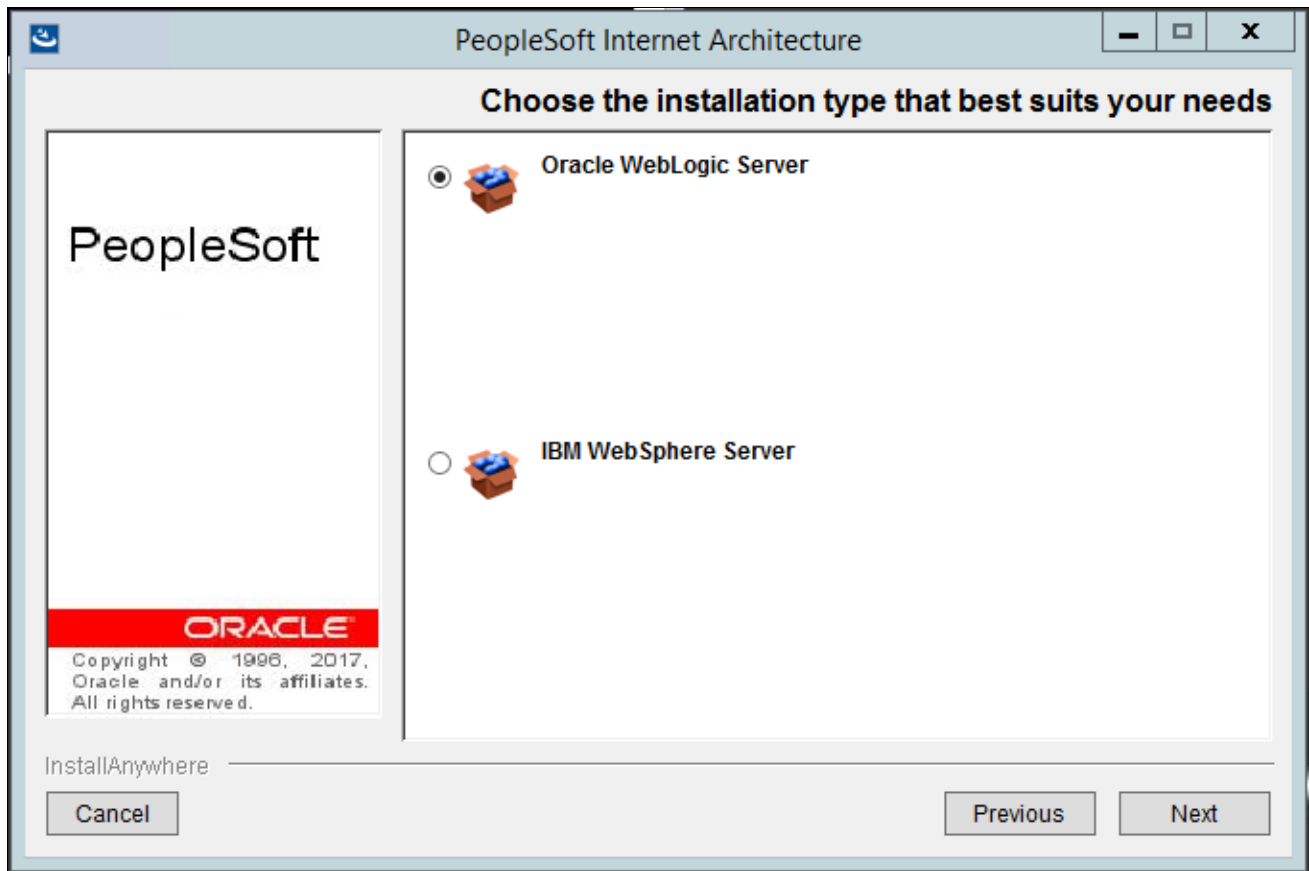

PeopleSoft Internet Architecture Choose the installation type that best suits your needs window


5. Specify the root directory where Oracle WebLogic is installed, *WLS\_HOME*, and click Next.

In this example, the root directory for Oracle WebLogic 12.2.1.0.0 is C:\WLS1221.

---

**Note.** If you enter an incorrect path for Oracle WebLogic, you receive an error message "Detected web server version: no choices available." Check that you have Oracle WebLogic installed, and in the designated directory.

---

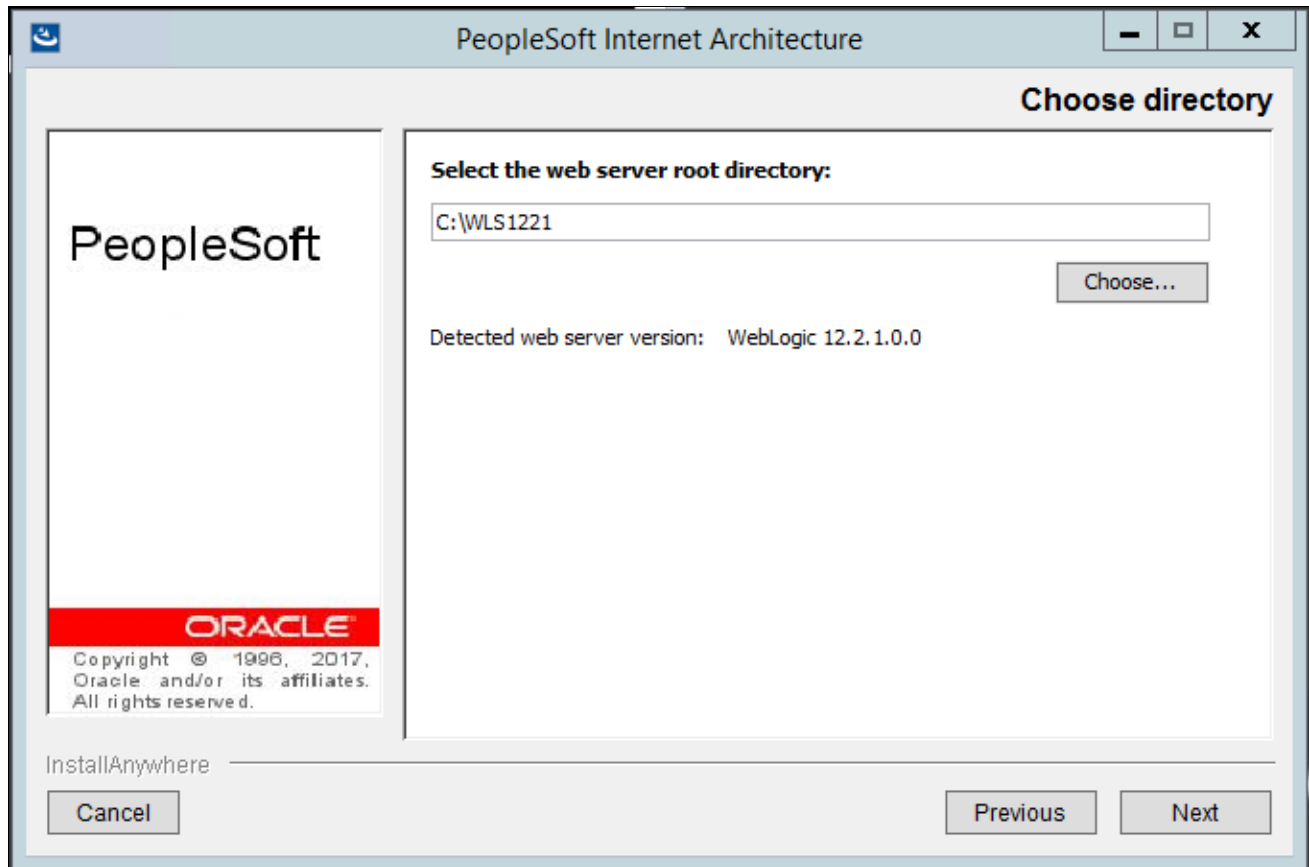

PeopleSoft Internet Architecture Choose directory window for Oracle WebLogic


6. Enter a domain name or accept the default name on the Domain Type window.

If the PIA installer cannot detect any existing Oracle WebLogic domains, only the option Create New WebLogic Domain is available as shown in this example. The default name is peoplesoft.

**Note.** If the PIA installer detects an existing WebLogic domain, you also see the option Existing WebLogic Domain, which is discussed in the next section. Verify that the option Create New WebLogic Domain is selected for this procedure. The installation process automatically generates a valid domain name in the domain name field, such as peoplesoft1.

See *Installing the PeopleSoft Pure Internet Architecture on an Existing Oracle WebLogic Domain*.

Click Next to continue.

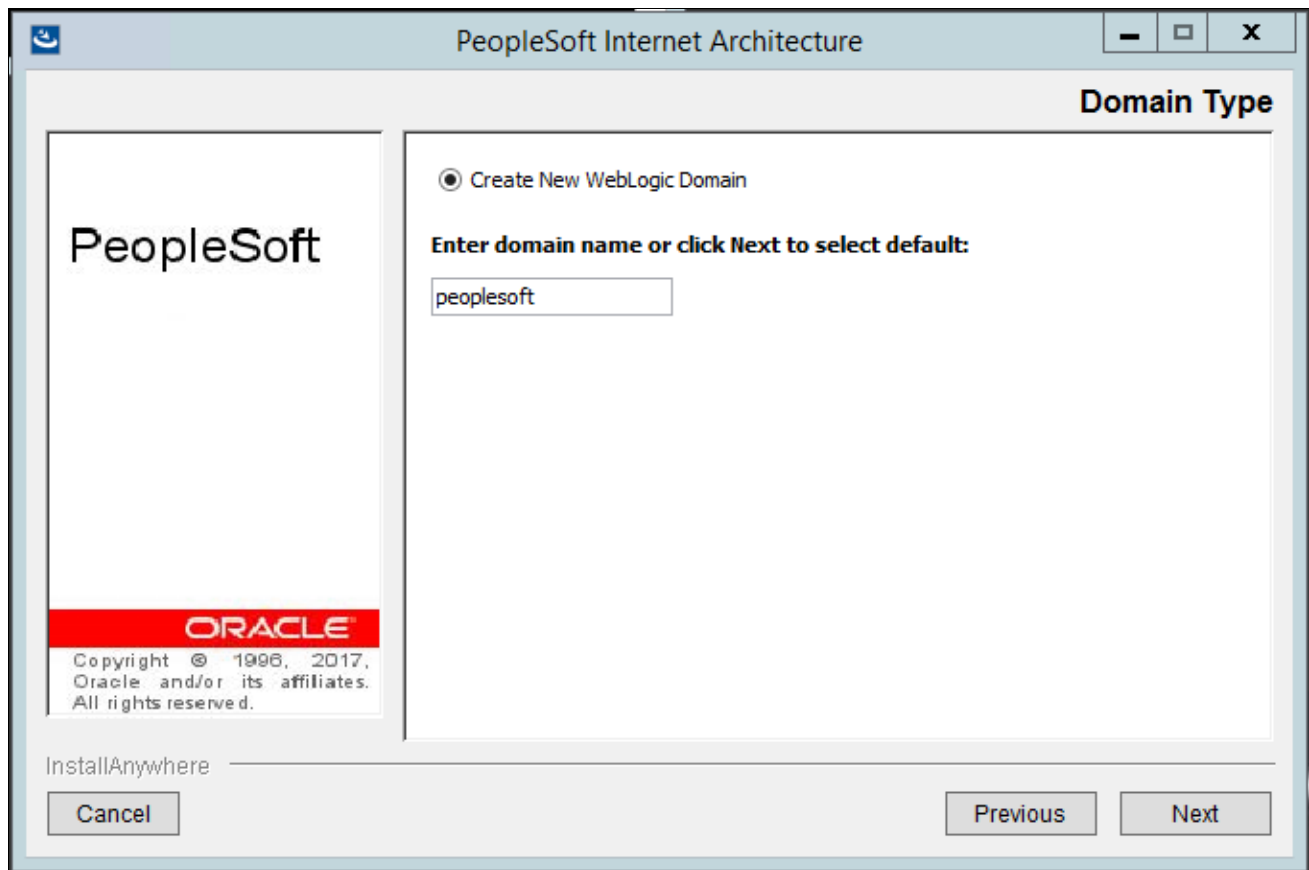


PeopleSoft Internet Architecture Domain Type window for creating a new domain



- 7. Enter the administrator login ID, and enter and re-enter the password for the new web server domain to be created.

The default login ID is system as shown in this example. The password must be at least 8 alphanumeric characters with at least one number or special character.


Click Next to continue.

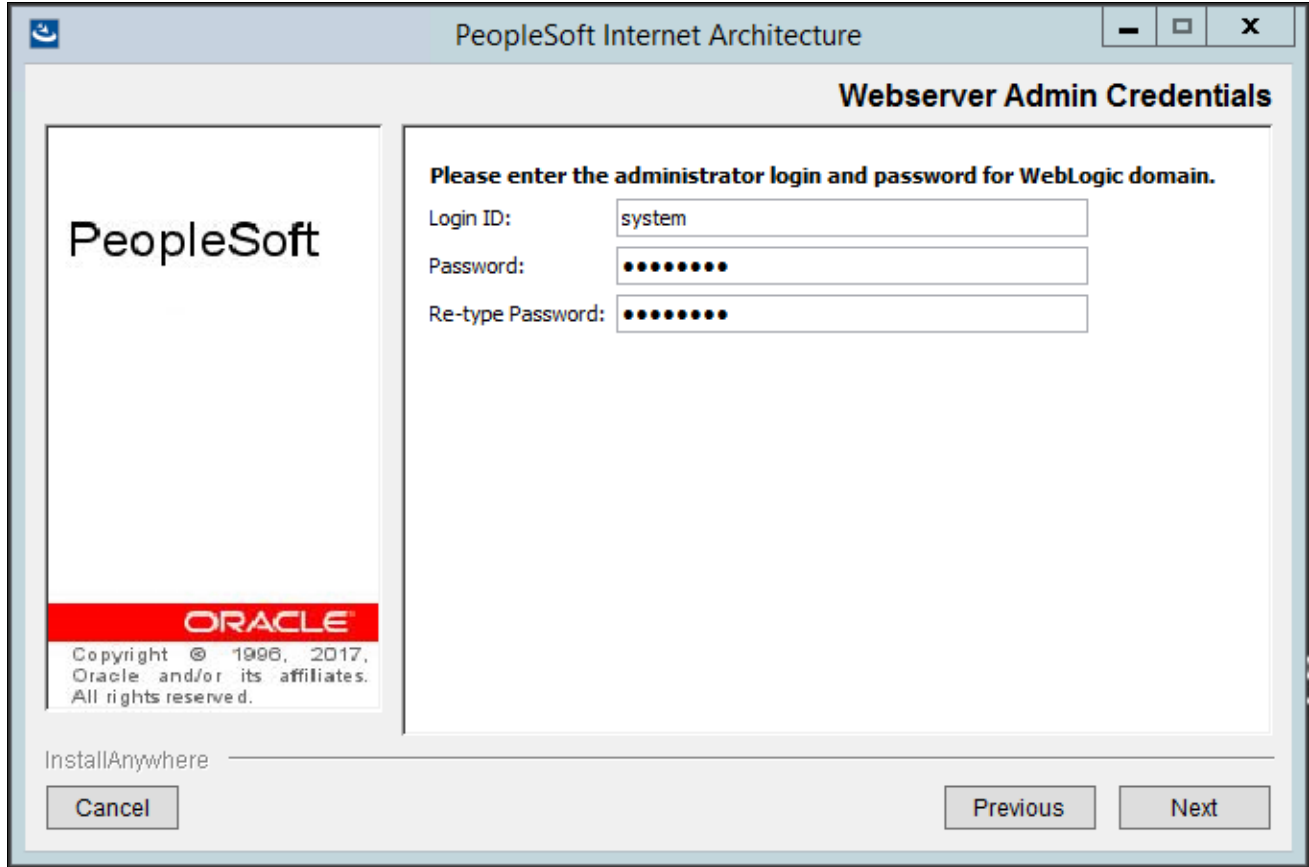

PeopleSoft Internet Architecture Webserver Admin Credentials window

8. Select the type of domain to create—single server, multi server, or distributed managed server.

In this example, Single Server Domain is selected.

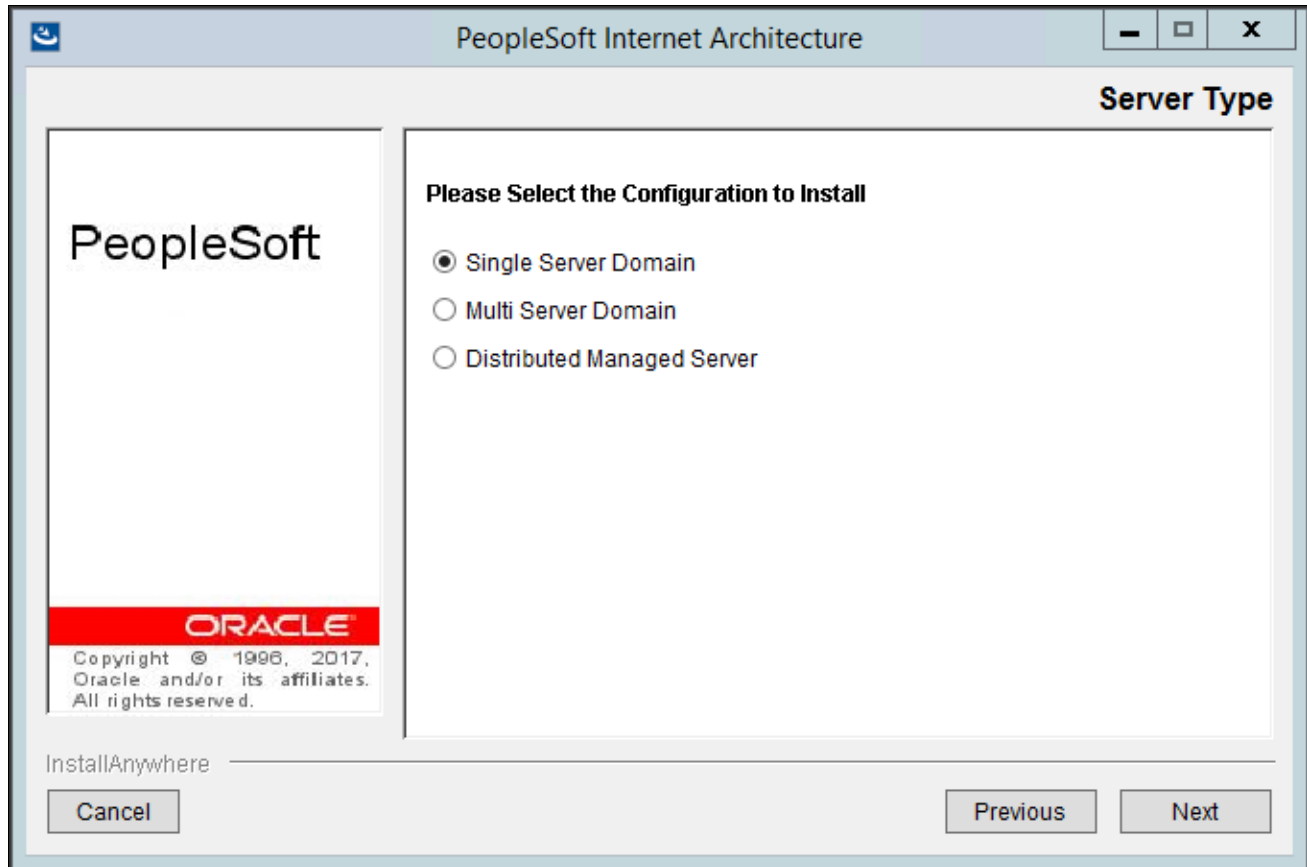

PeopleSoft Internet Architecture Server Type window

There are three domain configuration options:

- *Single Server Domain*

This domain configuration contains one server named PIA, and the entire PeopleSoft application is deployed to it. This configuration is intended for single user or very small scale, non-production environments. This configuration is very similar to the Oracle WebLogic domain provided in PeopleSoft PeopleTools 8.40 through 8.44.

- *Multi Server Domain*


This domain configuration contains seven unique server definitions, an Oracle WebLogic cluster, and the PeopleSoft application split across multiple servers. This configuration is intended for a production environment.

- *Distributed Managed Server*

This option is an extension of the Multi Server Domain selection and installs the necessary files to boot a managed server. This option requires a Multi Server installation to be performed to some other location, which will contain the configuration for this managed server.

- 9. Enter the Integration Gateway User name. Enter and re-enter the password for the Integration Gateway User. The default Integration Gateway User is administrator as shown in this example. The password must be at least 8 alphanumeric characters.

See *PeopleTools: Integration Broker Administration*.

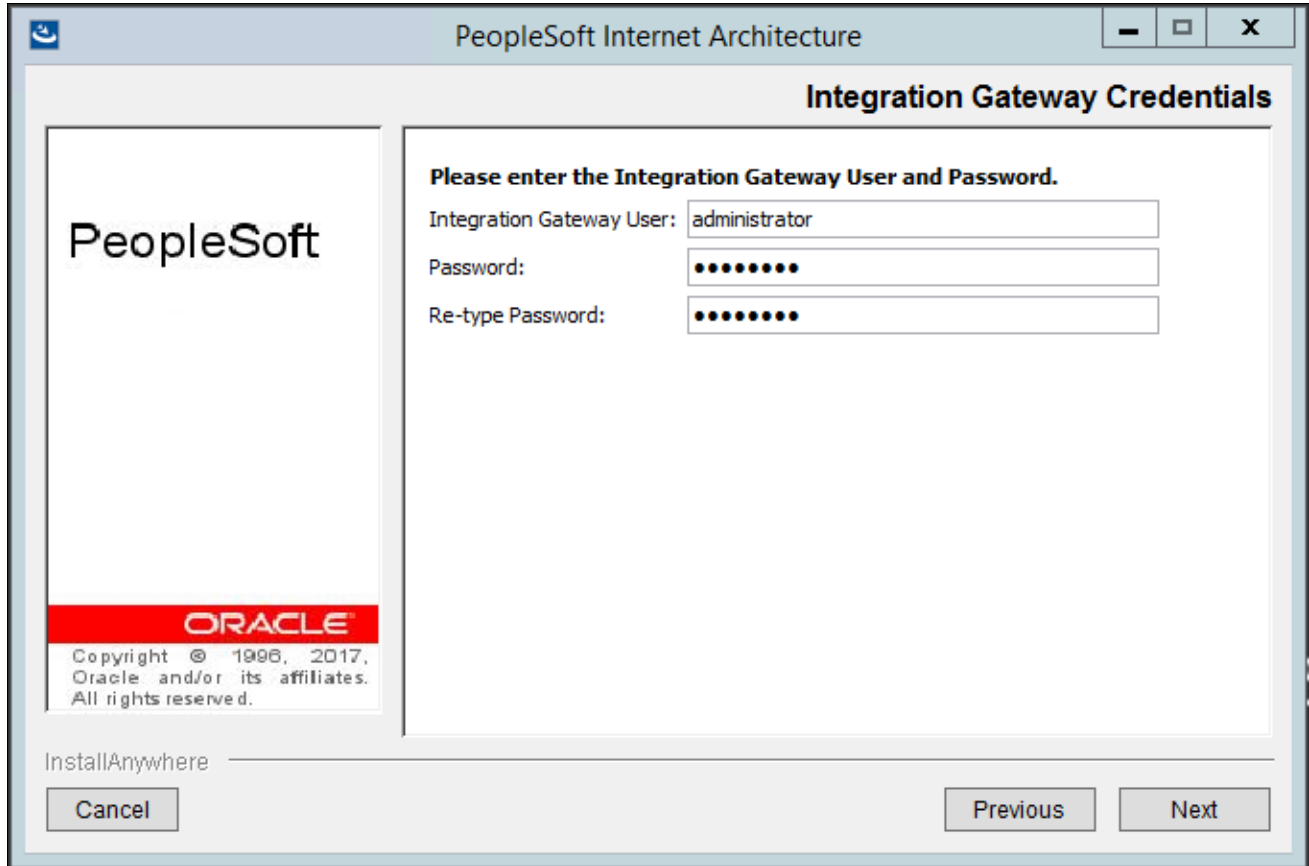


PeopleSoft Internet Architecture Integration Gateway Credentials window

10. Enter the AppServer Domain Connection password (optional).

If you configured your Application Server domain to require a Domain Connection password, enter it here. Otherwise, leave it blank as shown in this example. This password will be propagated to the Integration Gateway.

For more information about Application Server domain configuration and setting domain parameters, see the product documentation *PeopleTools: System and Server Administration*.

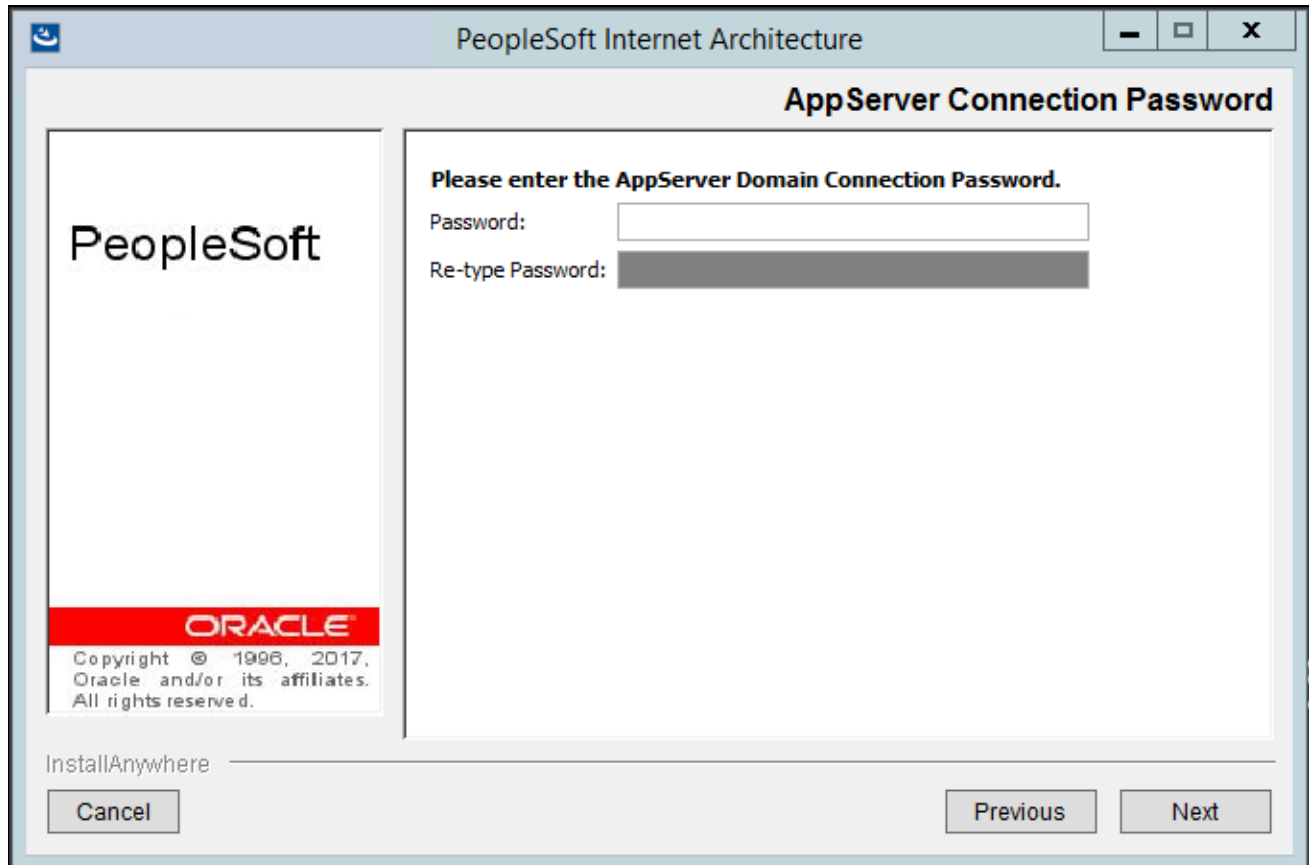


The screenshot shows a window titled "PeopleSoft Internet Architecture" with a subtitle "AppServer Connection Password". On the left side, there is a logo for "PeopleSoft" and the "ORACLE" logo below it, with copyright information: "Copyright © 1996, 2017, Oracle and/or its affiliates. All rights reserved." Below the logo is the text "InstallAnywhere". The main area of the window contains the instruction "Please enter the AppServer Domain Connection Password." followed by two input fields: "Password:" and "Re-type Password:". The "Re-type Password:" field is currently filled with a greyed-out password. At the bottom of the window, there are three buttons: "Cancel", "Previous", and "Next".

PeopleSoft Internet Architecture AppServer Connection Password window

11. Enter a PeopleSoft web site name; the default is ps as shown in this example.

**Warning!** The site name can include underscores ( \_ ), but an underscore cannot be followed by a numeric character or the string "newwin" (for example, my\_site\_3 or my\_newwin\_site).

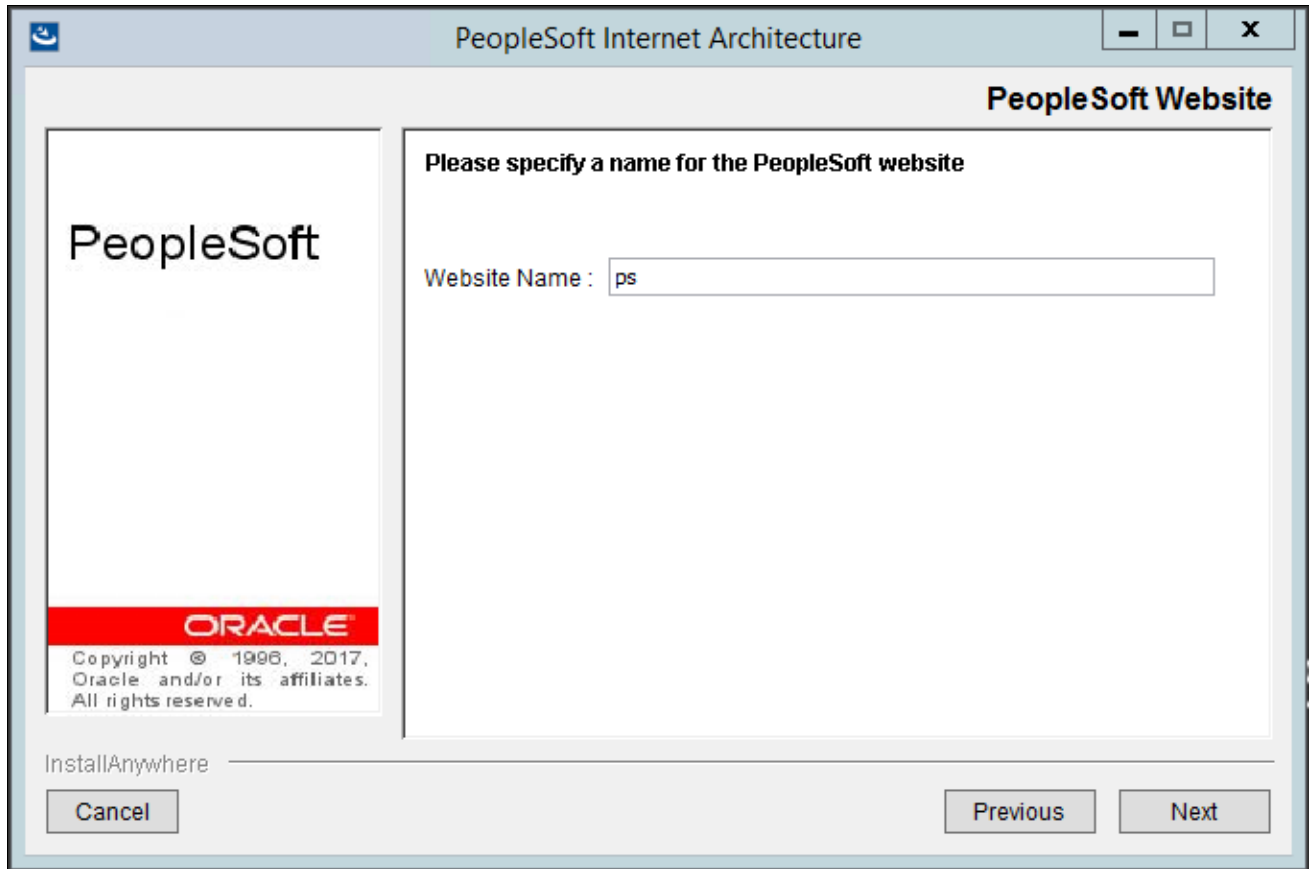

PeopleSoft Internet Architecture PeopleSoft Website window

12. Specify your application server name, its JSL (Jolt Station Listener) port number, its HTTP and HTTPS port numbers, the Authentication Token Domain (optional), and click Next.

PeopleSoft Internet Architecture Server Information window

- *AppServer name*  
For the AppServer name setting, enter the name of your application server, MACHINE\_NAME in this example.
- *JSL Port*  
For the JSL port setting, enter the JSL port number you specified when setting up your application server. (The default value is 9000 as in this example.)  
See "Configuring the Application Server on Windows."  
See "Configuring the Application Server on UNIX."
- *HTTP Port*  
The default value for the HTTP port is 80, as shown in this example.
- *HTTPS Port*  
The default value for the HTTPS port is 443, as shown in this example.
- *Authentication Token Domain*

---

**Note.** The value you enter for Authentication Token Domain must match the value you specify when configuring your application server, as described earlier in this book. In addition, certain installation configurations require that you specify an authentication domain.

---

See *Using Authentication Domains in the PeopleSoft Pure Internet Architecture Installation*.

If you enter a value for Authentication Token Domain, the URL to invoke PeopleSoft Pure Internet Architecture must include the network domain name in the URL. For example, if you do not enter an authentication domain, the URL to invoke PeopleSoft Pure Internet Architecture is `http://MachineName/ps/signon.html`. If you do enter a value for the authentication domain (for example, `.myCompany.com`), the URL to invoke PeopleSoft Pure Internet Architecture is `http://MachineName.myCompany.com/ps/signon.html`. In addition, if the web server for the database is using an http port other than the default port of 80, the URL must include the port number, for example `http://MachineName:8080/ps/signon.html` if there is no authentication domain, or `http://MachineName.myCompany.com:8080/ps/signon.html` if there is an authentication domain. The URL must also comply with the naming rules given earlier in this chapter.

See *Understanding the PeopleSoft Pure Internet Architecture*.

13. Enter the details for the web profile, PROD, or enter another name.

Enter a Web Profile Name, and enter the password two times. The example below shows the default web profile name, PROD, and default user ID, PTWEBSERVER.

The web profile name will be used to configure this web site. You can specify one of the other pre-delivered web profiles, DEV, TEST, or KIOSK, or enter a different name. If you intend to use a Web Profile User ID other than the default, PTWEBSERVER, be sure to review the information on web profile configuration and security in the *PeopleTools: Portal Technology* product documentation.

**Note.** If the PeopleSoft PeopleTools version of your database is *below* 8.44, then you will need to add the PTWEBSERVER User Profile before you upgrade to the current PeopleSoft PeopleTools release. The User Profile must include the PeopleTools Web Server role, but do not grant any other roles. Enter the password that you set for the User Profile for the User ID password in this step. The password must be at least 8 alphanumeric characters.

See the *PeopleTools: Security Administration* product documentation for the steps required to add a User Profile.

The screenshot shows a window titled "PeopleSoft Internet Architecture" with a subtitle "Web Profile Credentials". On the left side, there is a "PeopleSoft" logo and an "ORACLE" logo with the text "Copyright © 1996, 2017, Oracle and/or its affiliates. All rights reserved." Below this is the "InstallAnywhere" logo. The main area of the window contains a text box with the following text: "Please enter the Name of the Web Profile used to configure the webserver. The user id and password will be used to retrieve the web profile from the database. (NOTE: Other available preset web profile names are 'TEST', 'DEV', and 'KIOSK'.)" Below this text are four input fields: "Web Profile Name:" with the value "PROD", "User ID:" with the value "PTWEBSERVER", "Password:" with 8 dots, and "Re-type Password:" with 8 dots. At the bottom of the window, there are three buttons: "Cancel", "Previous", and "Next".

PeopleSoft Internet Architecture Web Profile Credentials window



14. Specify the root directory for the Report Repository, and click Next.

Make sure that the report repository directory is shared. You must have write access to the Report Repository directory. The default is C:\psreports, as shown in this example.


---

**Note.** In setting up the Process Scheduler to transfer reports, if you choose the FTP transfer protocol, use the same directory for the Home Directory as you use here for the report repository.

---

See *PeopleTools: Portal Technology*.


See "Setting Up Process Scheduler on Windows," Setting Up Process Scheduler to Transfer Reports and Logs to the Report Repository.

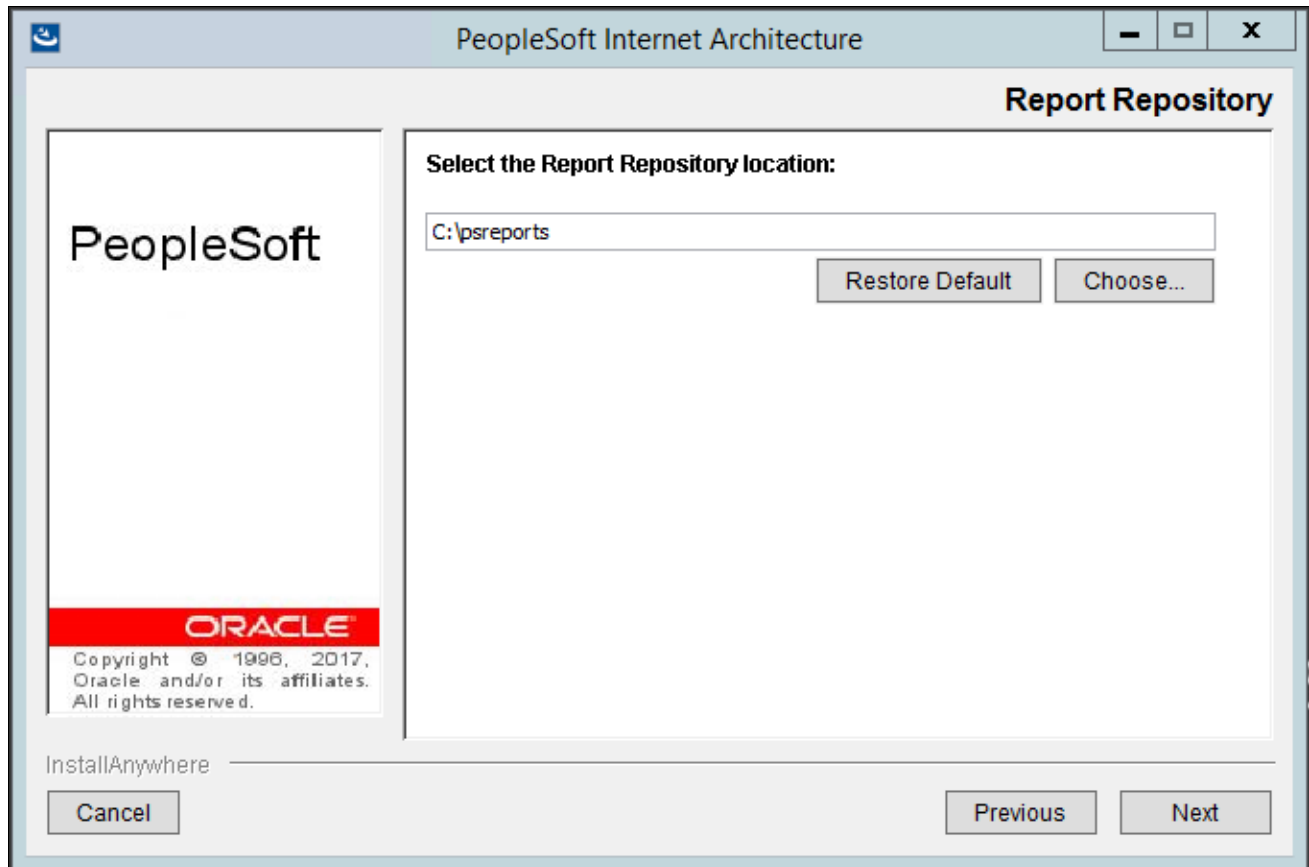

PeopleSoft Internet Architecture Report Repository window

15. Verify all of your selections (click Back if you need to make any changes), and click Install to begin the installation.

The window displays a summary of the installation information, such as web server software, web server root directory, version, and so on.

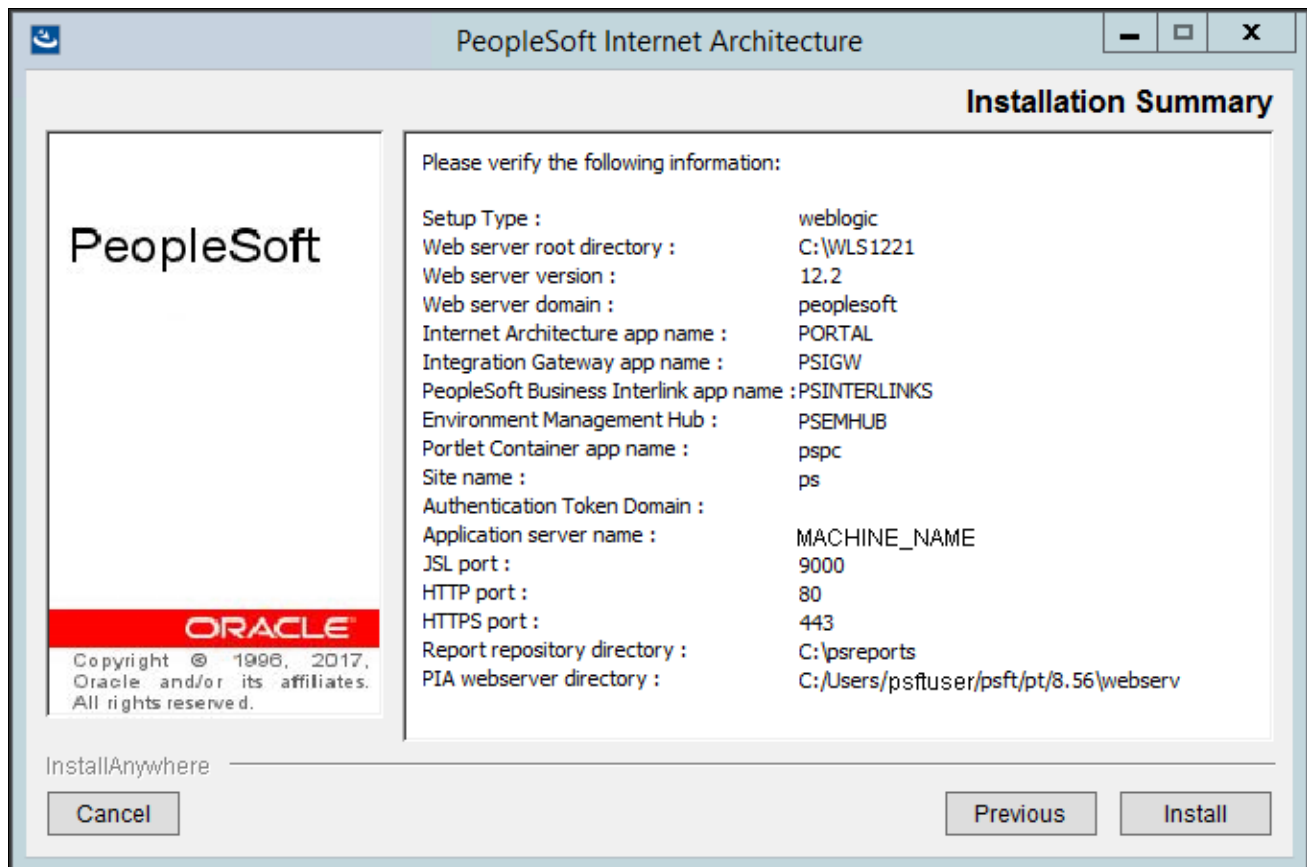

PeopleSoft Internet Architecture Installation Summary window

An indicator appears showing the progress of your installation.


16. Click Finish to complete the installation.

The default installation directory for the PIA domain is `<PIA_HOME>\webserv\<domain_name>`. The Install Complete window displays the parent installation directory for the domain. In this example, this is `C:/Users/psftuser/psft/pt/8.56/webserv`.

---

**Note.** If you are installing into an existing domain, you need to restart that domain.

---

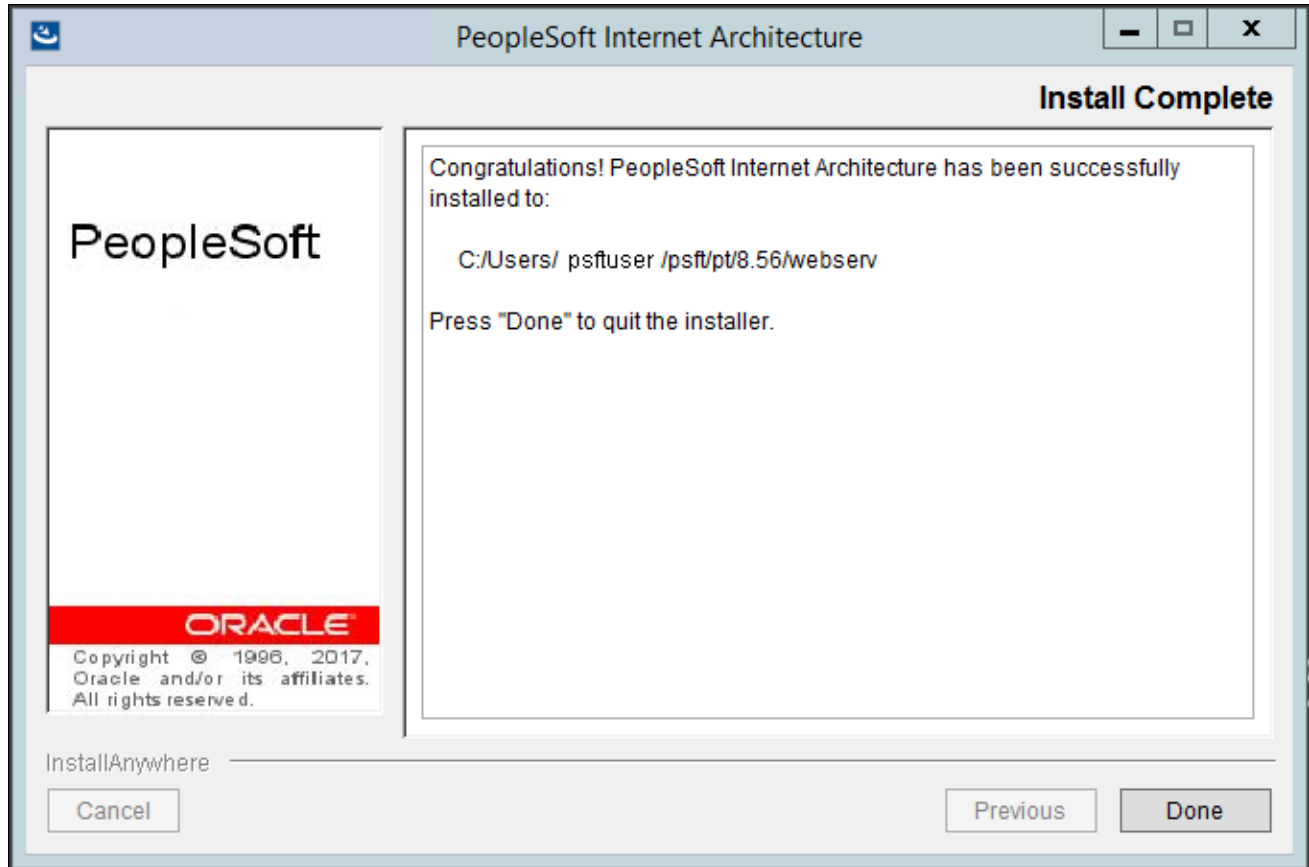

PeopleSoft Internet Architecture Install Complete window


## Task 9A-2-2: Installing the PeopleSoft Pure Internet Architecture on an Existing Oracle WebLogic Domain

Use these instructions to install the PeopleSoft Pure Internet Architecture on an existing Oracle WebLogic domain. See the previous section to install on a new Oracle WebLogic domain.

1. Go to `PS_HOME\setup\PsmPPIAInstall` and run `setup.bat`.

See "Using the PeopleSoft Installer," Running the PeopleSoft Installer, for setup command options.

2. Click Next on the Welcome to the InstallAnywhere Wizard for PeopleSoft Internet Architecture window. The window displays the PeopleSoft PeopleTools version, 8.56 in this example, and includes this note: "If installing onto a Oracle WebLogic Server, make sure to shutdown any running web servers to avoid web server corruption."

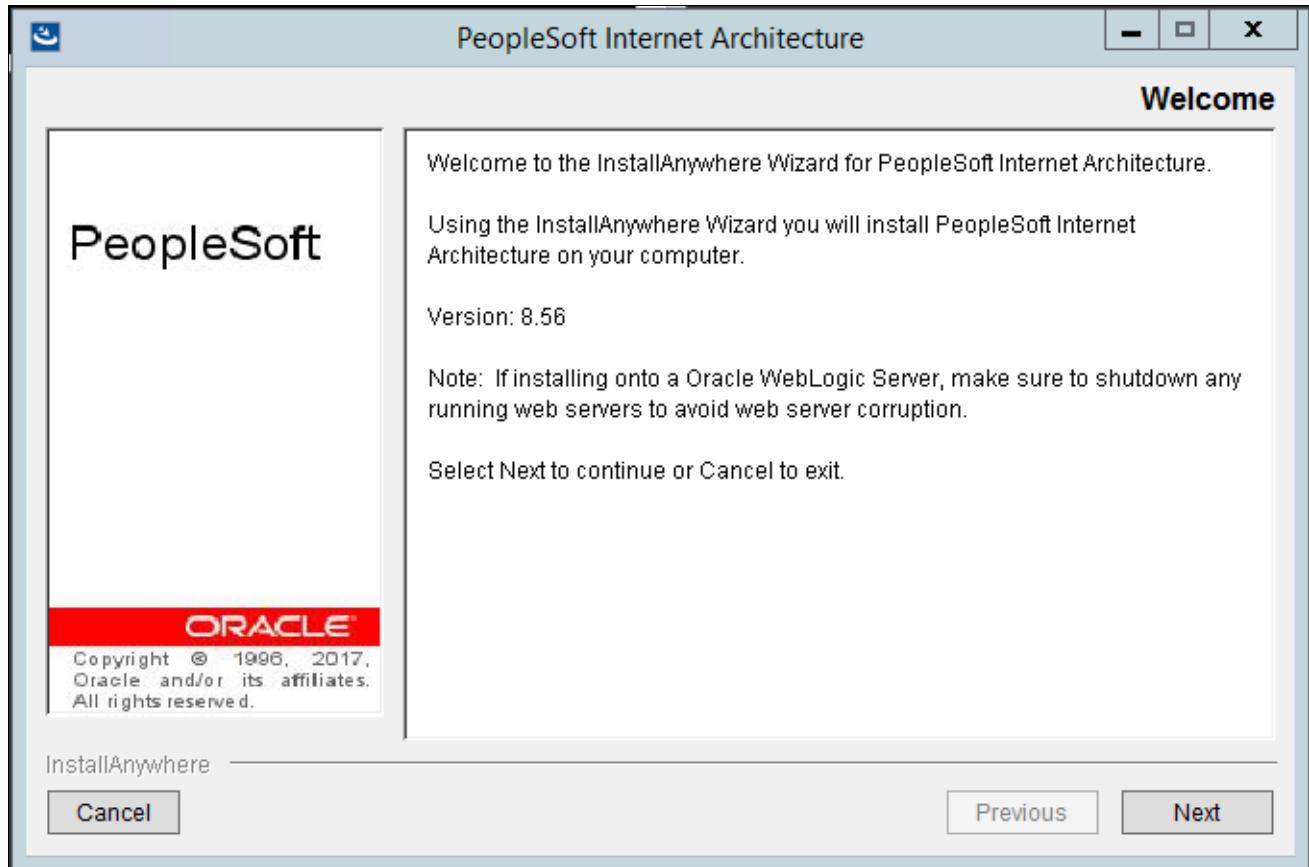


PeopleSoft Internet Architecture Welcome window

- 3. Enter the location where you want to install the PeopleSoft Pure Internet Architecture, referred to in this documentation as *PIA\_HOME*.


In this example, the directory is C:\Users\psftuser\psft\pt\8.56. The default location for *PIA\_HOME* is the same as *PS\_CFG\_HOME*.

See "Preparing for Installation," Planning Your Initial Configuration.

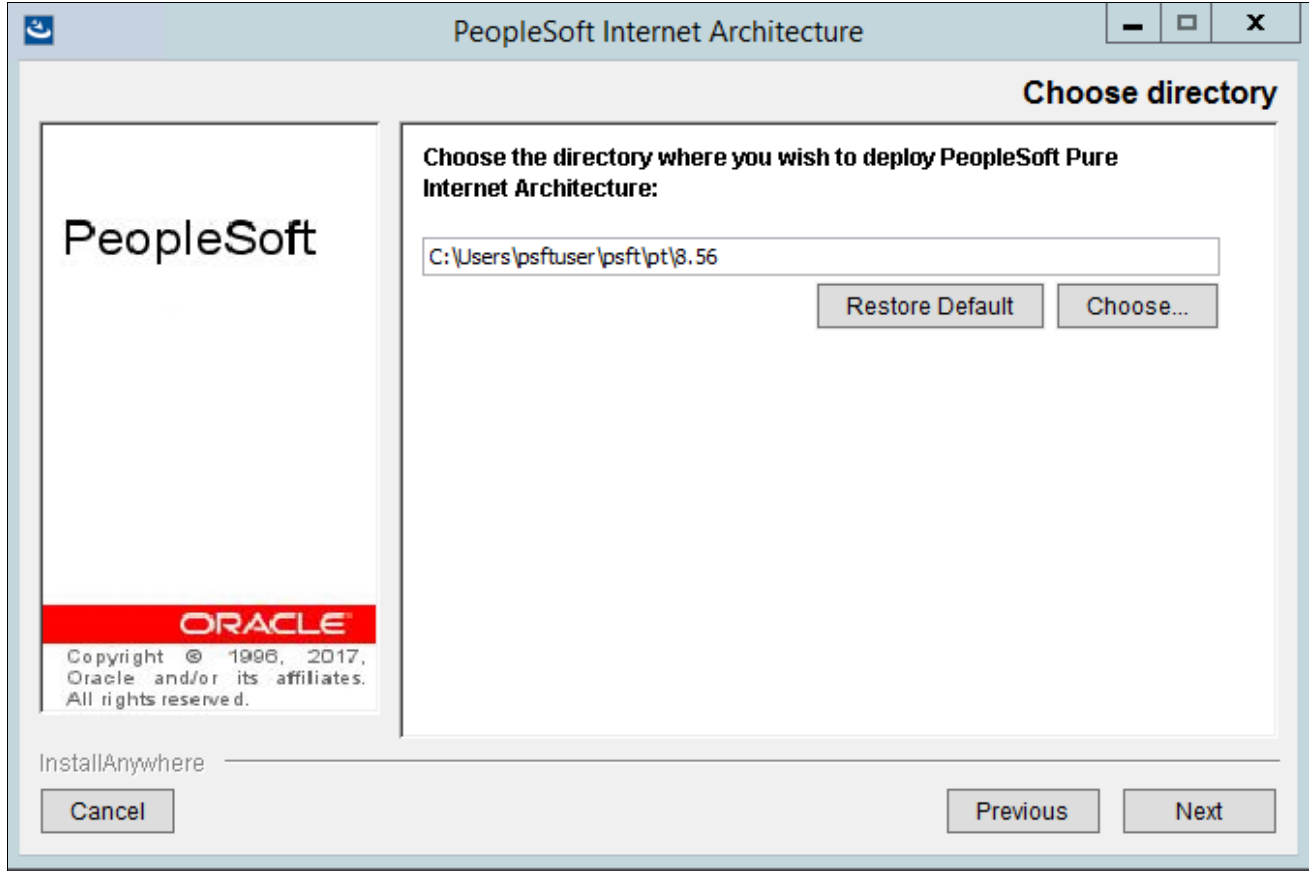

PeopleSoft Internet Architecture Choose directory window

- 4. Select Oracle WebLogic Server as in this example, and then click Next.

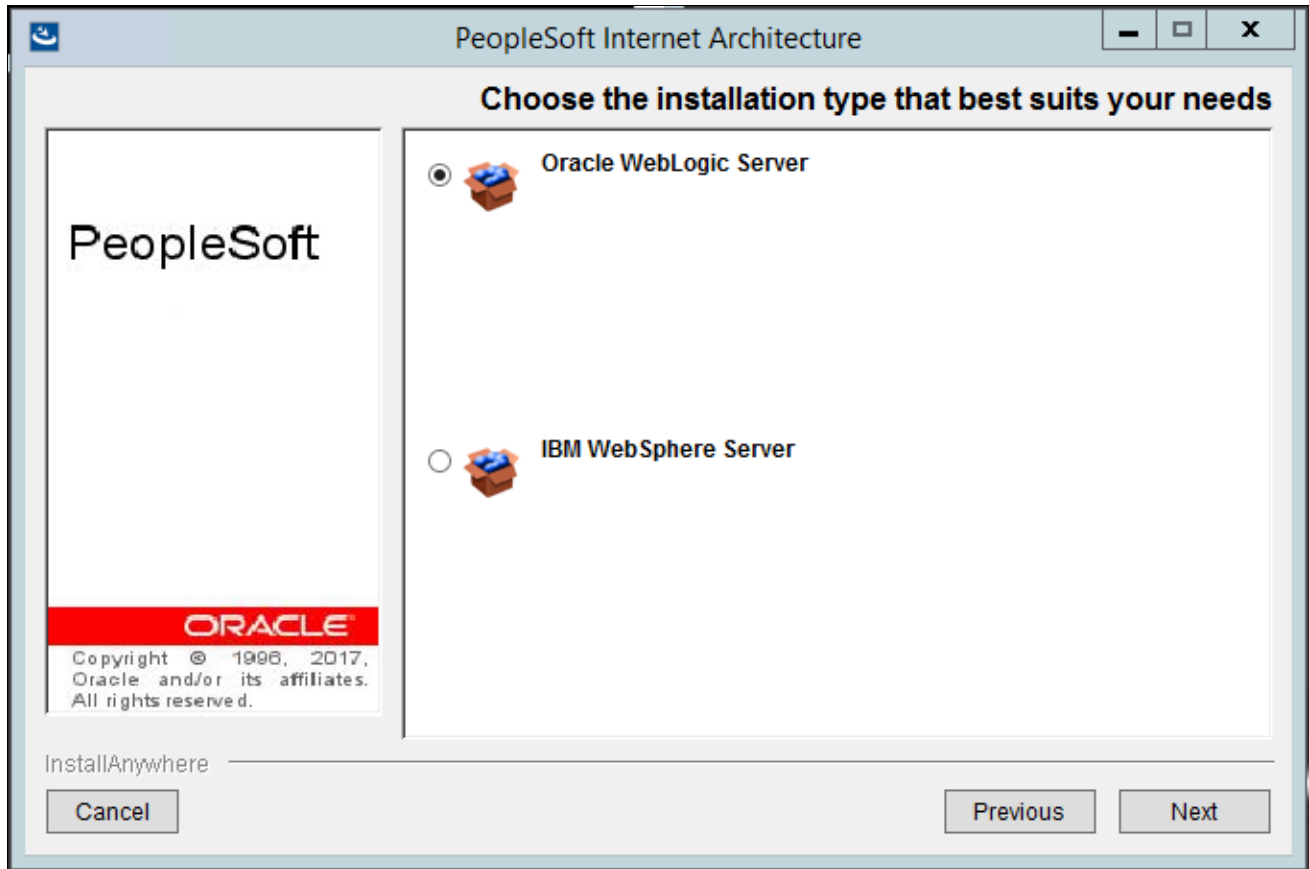


PeopleSoft Internet Architecture Choose the installation type that best suits your needs window

- 5. Specify the root directory where Oracle WebLogic is installed, *WLS\_HOME*, and click Next.

In this example, the root directory for Oracle WebLogic 12.2.1.0.0 is C:\WLS1221.


**Note.** If you enter an incorrect path for Oracle WebLogic, you receive an error message "Detected web server version: no choices available." Check that you have Oracle WebLogic installed, and in the designated directory.

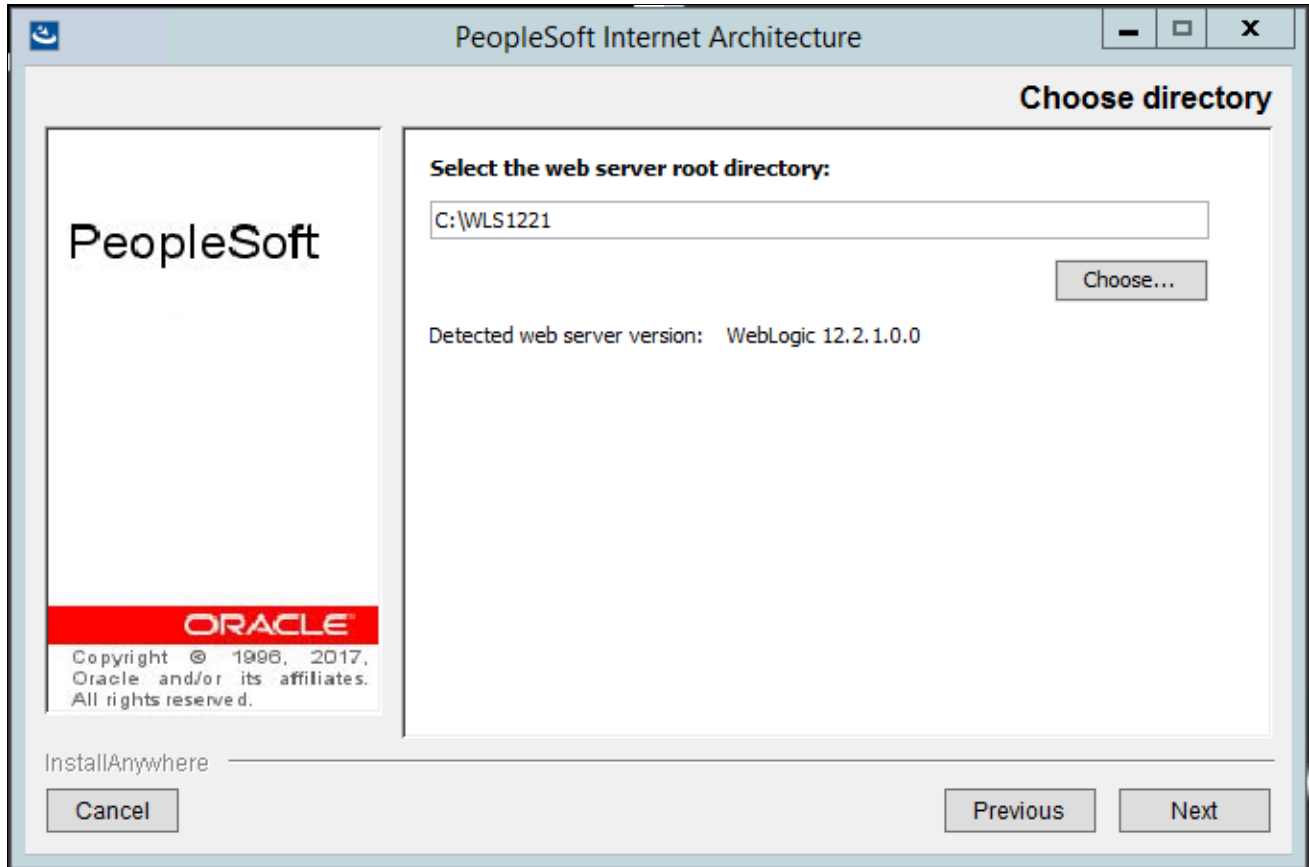

PeopleSoft Internet Architecture Choose directory window for Oracle WebLogic

- 6. Select Existing WebLogic Domain on the Domain Type window.

7. Select the domain name from the drop-down list, peoplesoft in this example, and select one of the following options:

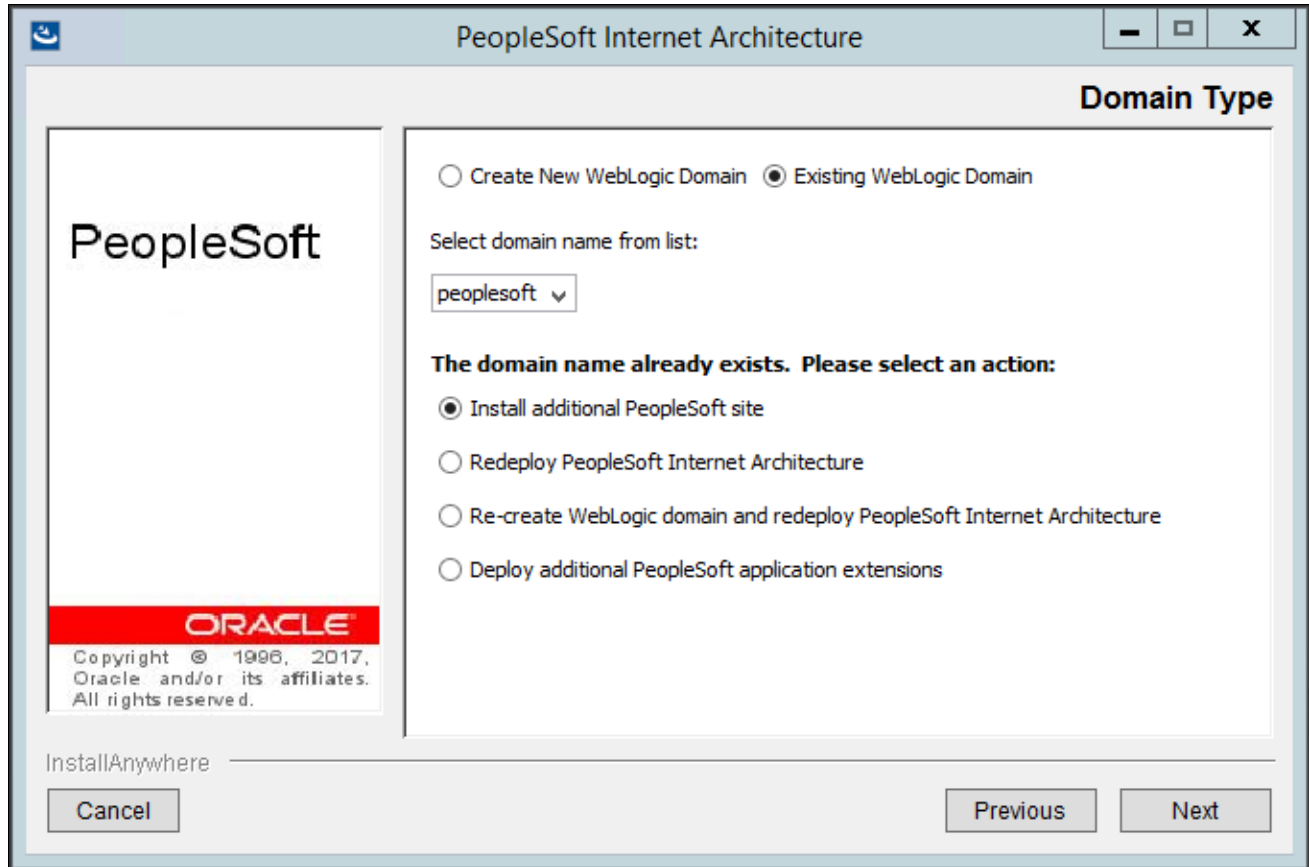

PeopleSoft Internet Architecture Domain Type window with options for Existing WebLogic Domain

- *Install additional PeopleSoft site*

This option is relevant only to the PeopleSoft PORTAL web application, and does not modify or revert any other configuration settings. Select this option to install only the necessary files for defining an additional PeopleSoft site onto an existing Oracle WebLogic configuration. The new site will be accessed using its name in the URL. A site named "CRM" would be accessed using a URL similar to `http://mywebserver_machine/CRM`. To reset or re-create an existing PeopleSoft site, simply enter that site's name as the site to create. On your web server, a PeopleSoft site is comprised of the following directories within the PORTAL web application:

```
<WEBLOGIC_DOMAIN>\applications\peoplesoft\PORTAL\<site>|*
```

```
<WEBLOGIC_DOMAIN>\applications\peoplesoft\PORTAL\WEB-INF\psftdocs\<site>|*
```

- *Redeploy PeopleSoft Internet Architecture*

This option affects all of the PeopleSoft Pure Internet Architecture web applications installed to the local Oracle WebLogic domain. Select this option to redeploy all of the web components of the PeopleSoft Pure Internet Architecture. The redeployment process updates all of the web components of the PeopleSoft Pure Internet Architecture, without modifying the configuration files or scripts that belong to the Oracle WebLogic server domain.

- *Re-create WebLogic domain and redeploy PeopleSoft Internet Architecture*

This option affects Oracle WebLogic Server domain configuration and all of the PeopleSoft Pure Internet Architecture web applications installed to the local Oracle WebLogic domain. Select this option to



completely remove an existing Oracle WebLogic domain and deploy the PeopleSoft Pure Internet Architecture components to create the newly specified PeopleSoft site.

**Warning!** Re-creating an existing domain will delete everything previously installed into that domain.

See *PeopleTools: Portal Technology*.

- *Deploy additional PeopleSoft application extensions*

This option is solely for use with PeopleSoft applications. PeopleSoft application extensions are provided with certain PeopleSoft applications, and this option allows you to deploy those extensions. Consult the installation documentation for your PeopleSoft application to see if this option is appropriate. PeopleSoft PeopleTools does not use application extensions.

8. Enter the Login ID and password that you used when creating the existing domain:




PeopleSoft Internet Architecture Webserver Admin Credentials window for an existing domain

9. Select the type of domain to create—single server, multi server, or distributed managed server.

In this example, Single Server Domain is selected.

**Note.** Depending upon the operation you are carrying out for an existing domain, you may not see this window.

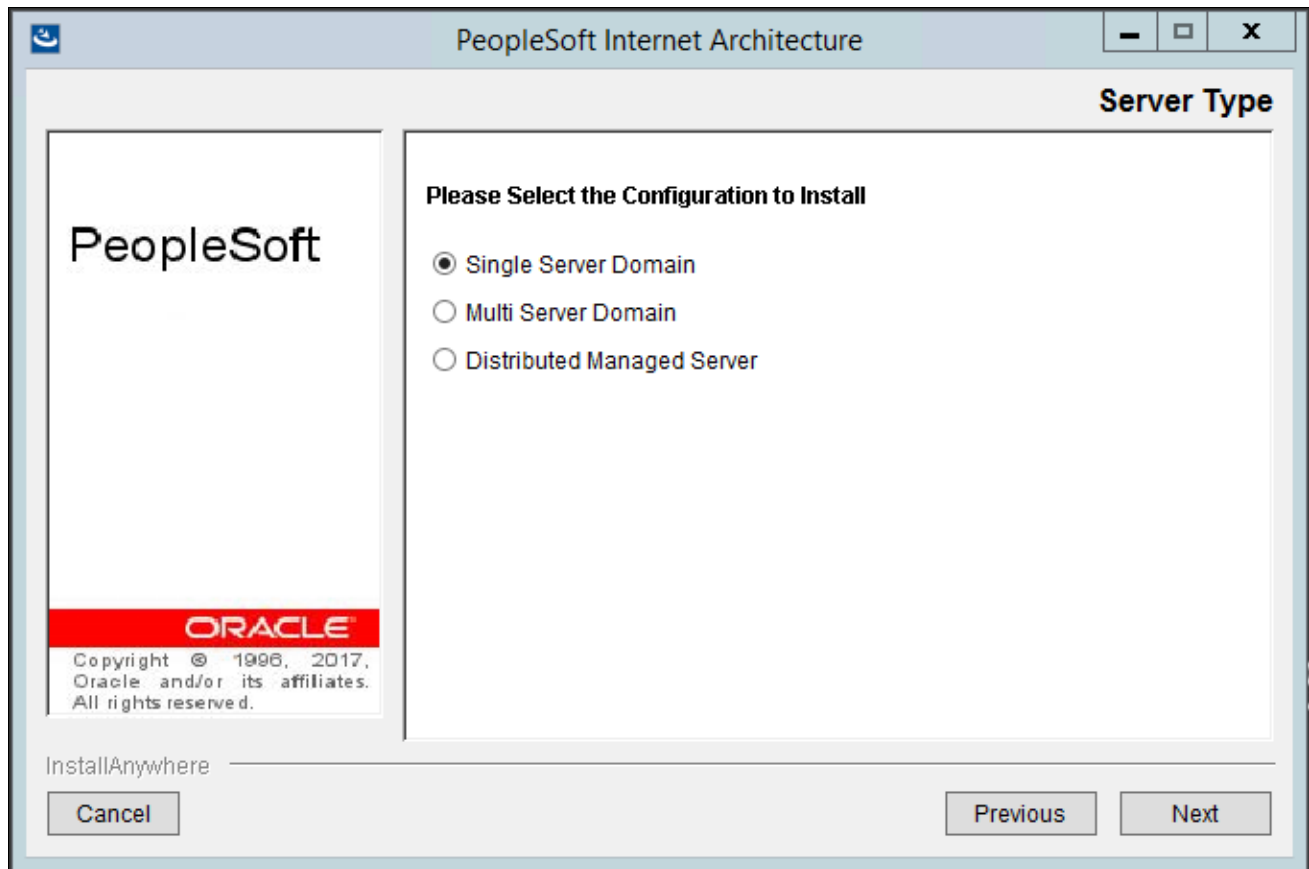

PeopleSoft Internet Architecture Server Type window

There are three domain configuration options:

- *Single Server Domain*

This domain configuration contains one server named PIA, and the entire PeopleSoft application is deployed to it. This configuration is intended for single user or very small scale, non-production environments. This configuration is very similar to the Oracle WebLogic domain provided in PeopleSoft PeopleTools 8.40 through 8.44.

- *Multi Server Domain*


This domain configuration contains seven unique server definitions, an Oracle WebLogic cluster, and the PeopleSoft application split across multiple servers. This configuration is intended for a production environment.

- *Distributed Managed Server*

This option is an extension of the Multi Server Domain selection and installs the necessary files to boot a managed server. This option requires a Multi Server installation to be performed to some other location, which will contain the configuration for this managed server.

- 10. Enter the Integration Gateway User name. Enter and re-enter the password for the Integration Gateway User. The default Integration Gateway User is administrator as shown in this example. The password must be at least 8 alphanumeric characters.

See *PeopleTools: Integration Broker Administration*.

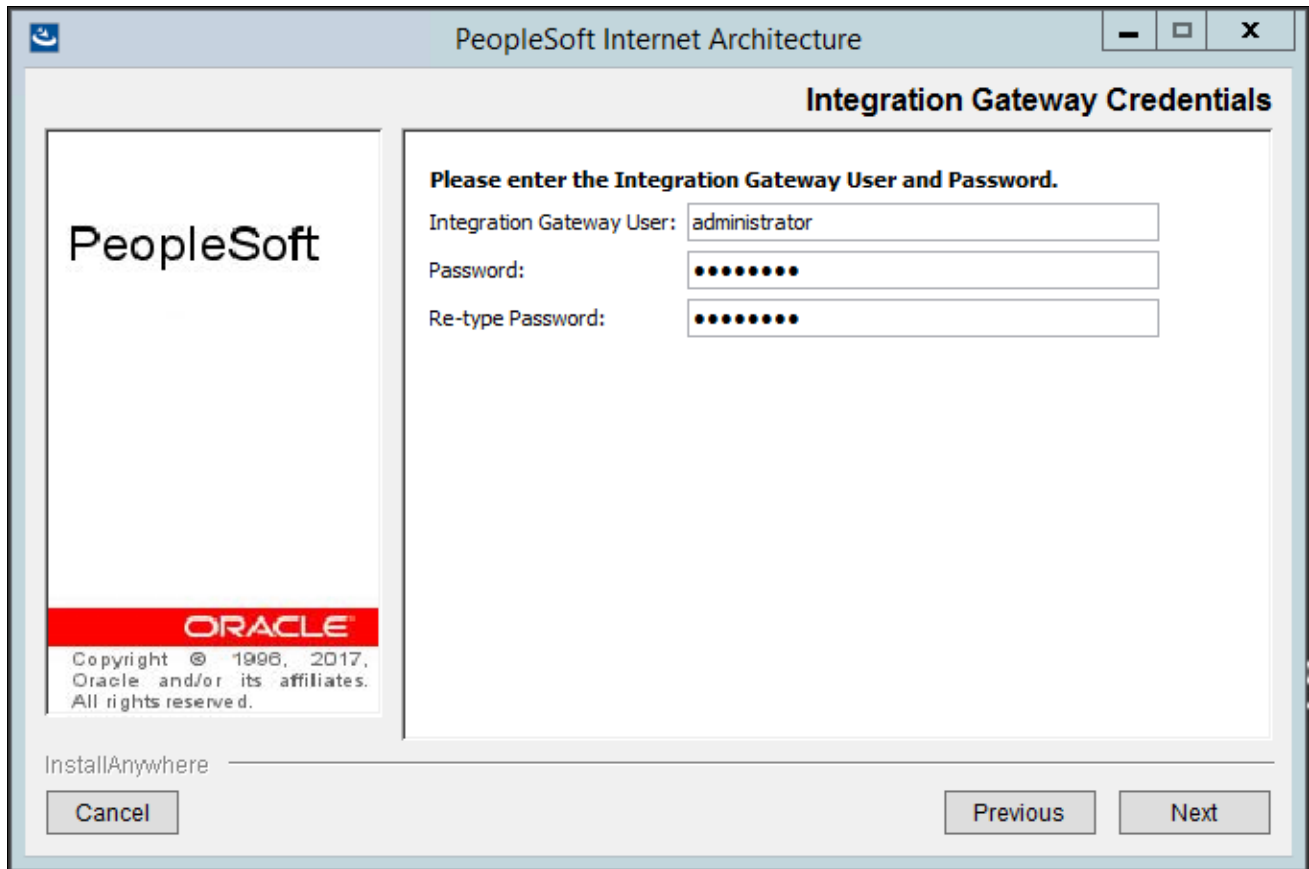


PeopleSoft Internet Architecture Integration Gateway Credentials window

11. Enter the AppServer Domain Connection password (optional).

If you configured your Application Server domain to require a Domain Connection password, enter it here. Otherwise, leave it blank as shown in this example. This password will be propagated to the Integration Gateway.

For more information about Application Server domain configuration and setting domain parameters, see the product documentation *PeopleTools: System and Server Administration*.

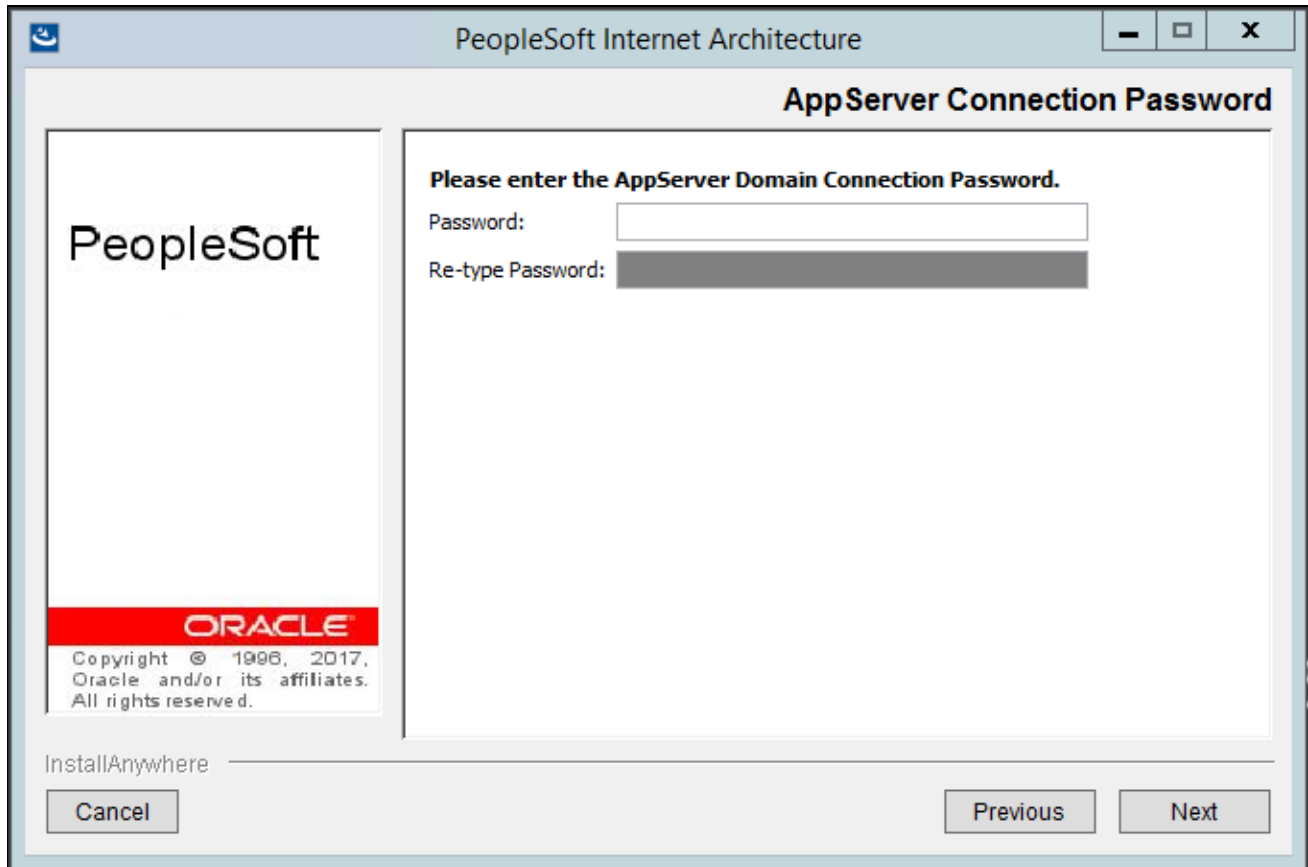


The screenshot shows a window titled "PeopleSoft Internet Architecture" with a subtitle "AppServer Connection Password". On the left side, there is a logo for "PeopleSoft" and the "ORACLE" logo with the text "Copyright © 1996, 2017, Oracle and/or its affiliates. All rights reserved." Below this is the text "InstallAnywhere". On the right side, there is a text box with the instruction "Please enter the AppServer Domain Connection Password." followed by two input fields: "Password:" and "Re-type Password:". At the bottom of the window, there are three buttons: "Cancel", "Previous", and "Next".

PeopleSoft Internet Architecture AppServer Connection Password window

12. If you selected the option Deploy additional PeopleSoft application extensions on the Domain Type window, enter the location where you installed the PeopleSoft application software, *PS\_APP\_HOME*.
13. For the option Deploy additional PeopleSoft application extensions, select the application packages to deploy.

14. Enter a PeopleSoft web site name; in this example the name is psone.

**Warning!** The site name can include underscores ( \_ ), but an underscore cannot be followed by a numeric character or the string "newwin" (for example, my\_site\_3 or my\_newwin\_site).

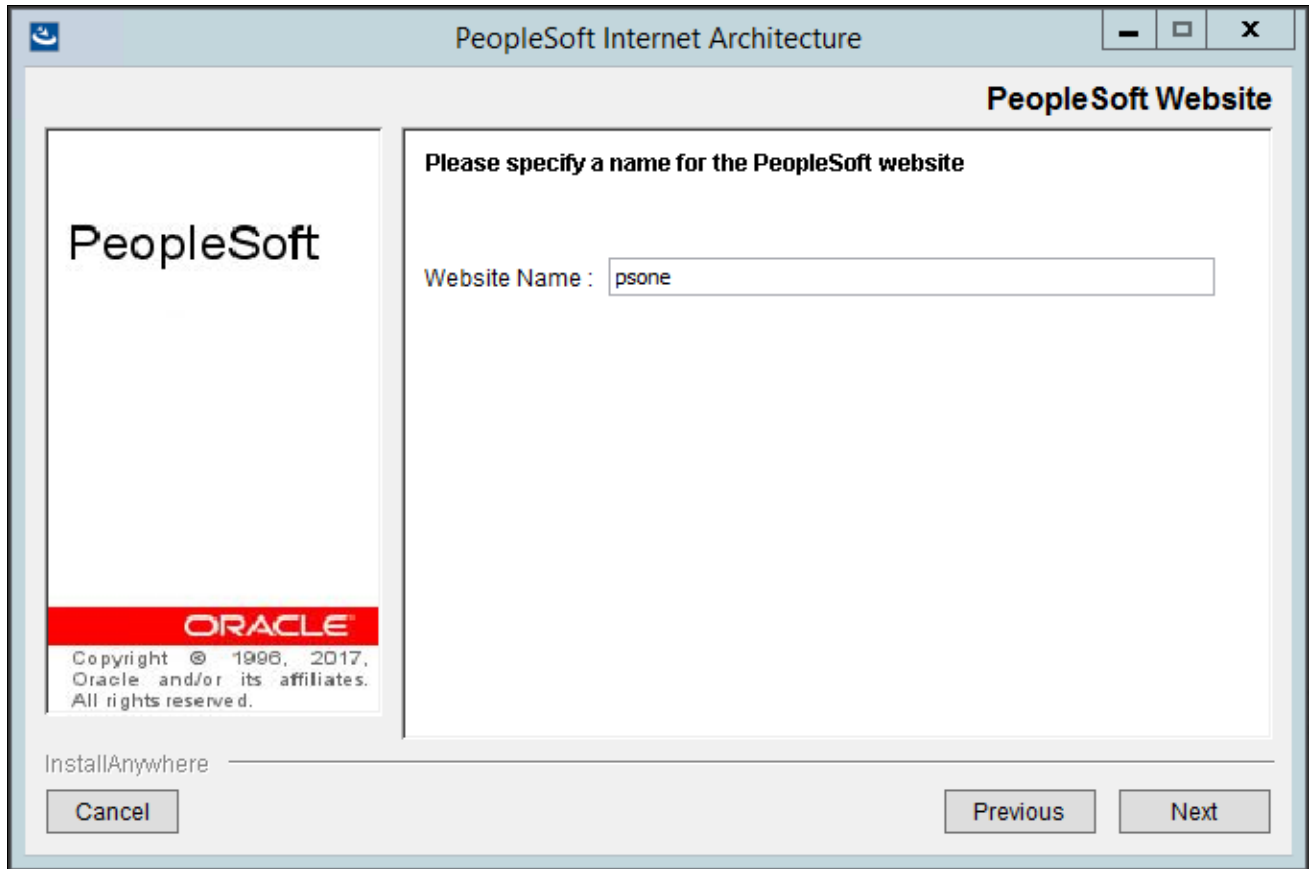

PeopleSoft Internet Architecture PeopleSoft Website window

15. Specify your application server name, its JSL (Jolt Station Listener) port number, its HTTP and HTTPS port numbers, the Authentication Token Domain (optional), and click Next.

**Note.** The fields that appear on this window may change depending upon the type of operation you are carrying out for an existing domain.

PeopleSoft Internet Architecture Server Information window

- *AppServer name*  
For the AppServer name setting, enter the name of your application server, MACHINE\_NAME in this example.
- *JSL Port*  
For the JSL port setting, enter the JSL port number you specified when setting up your application server. (The default value is 9000 as in this example.)  
See the chapter on configuring the application server in this documentation.
- *HTTP Port*  
The default value for the HTTP port is 80, as shown in this example.
- *HTTPS Port*  
The default value for the HTTPS port is 443, as shown in this example.
- *Authentication Token Domain*

---

**Note.** The value you enter for Authentication Token Domain must match the value you specify when configuring your application server, as described earlier in this book. In addition, certain installation configurations require that you specify an authentication domain.

---

See [Using Authentication Domains in the PeopleSoft Pure Internet Architecture Installation](#).

If you enter a value for Authentication Token Domain, the URL to invoke PeopleSoft Pure Internet Architecture must include the network domain name in the URL. For example, if you do not enter an authentication domain, the URL to invoke PeopleSoft Pure Internet Architecture is `http://MachineName/ps/signon.html`. If you do enter a value for the authentication domain (for example, `.myCompany.com`), the URL to invoke PeopleSoft Pure Internet Architecture is `http://MachineName.myCompany.com/ps/signon.html`. In addition, if the web server for the database is using an http port other than the default port of 80, the URL must include the port number, for example `http://MachineName:8080/ps/signon.html` if there is no authentication domain, or `http://MachineName.myCompany.com:8080/ps/signon.html` if there is an authentication domain. The URL must also comply with the naming rules given earlier in this chapter.

See [Understanding the PeopleSoft Pure Internet Architecture](#).

16. Enter the details for the web profile, PROD, or enter another name.

Enter a Web Profile Name, and enter the password two times. The example below shows the default web profile name, PROD, and default user ID, PTWEBSERVER.

The web profile name will be used to configure this web site. You can specify one of the other predelivered web profiles, DEV, TEST, or KIOSK, or enter a different name. If you intend to use a Web Profile User ID other than the default, PTWEBSERVER, be sure to review the information on web profile configuration and security in the *PeopleTools: Portal Technology* product documentation.

**Note.** If the PeopleSoft PeopleTools version of your database is *below* 8.44, then you will need to add the PTWEBSERVER User Profile before you upgrade to the current PeopleSoft PeopleTools release. The User Profile must include the PeopleTools Web Server role, but do not grant any other roles. Enter the password that you set for the User Profile for the User ID password in this step. The password must be at least 8 alphanumeric characters.

See the *PeopleTools: Security Administration* product documentation for the steps required to add a User Profile.

PeopleSoft Internet Architecture

### Web Profile Credentials

Please enter the Name of the Web Profile used to configure the webserver. The user id and password will be used to retrieve the web profile from the database. (NOTE: Other available preset web profile names are "TEST", "DEV", and "KIOSK".)

Web Profile Name:

User ID:

Password:

Re-type Password:

PeopleSoft

ORACLE  
Copyright © 1996, 2017,  
Oracle and/or its affiliates.  
All rights reserved.

InstallAnywhere

Cancel Previous Next

PeopleSoft Internet Architecture Web Profile Credentials window



17. Specify the root directory for the Report Repository, and click Next.

Make sure that the report repository directory is shared. You must have write access to the Report Repository directory. The default is C:\psreports, as shown in this example.


---

**Note.** In setting up the Process Scheduler to transfer reports, if you choose the FTP transfer protocol, use the same directory for the Home Directory as you use here for the report repository.

---

See *PeopleTools: Portal Technology*.


See "Setting Up Process Scheduler on Windows," Setting Up Process Scheduler to Transfer Reports and Logs to the Report Repository.

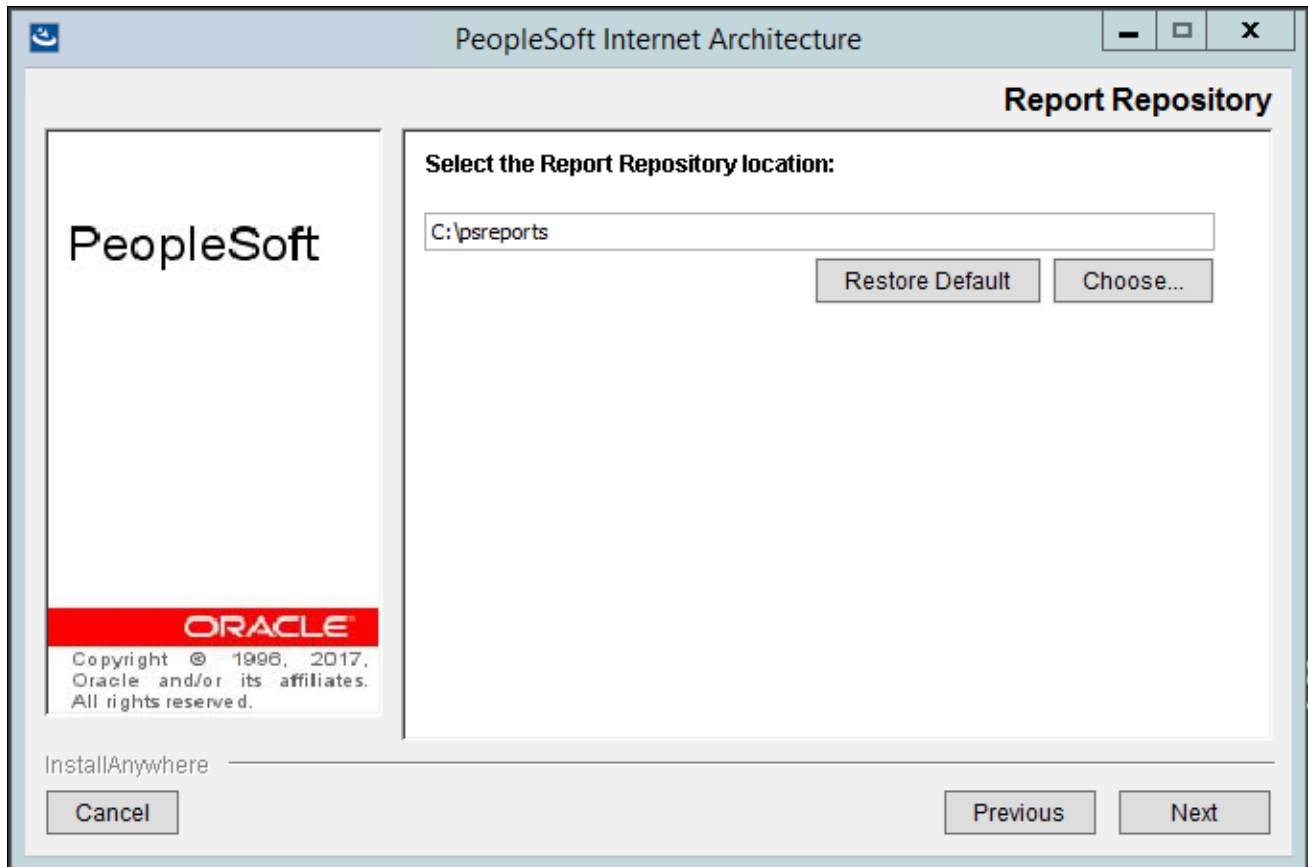

PeopleSoft Internet Architecture Report Repository window

18. Verify all of your selections (click Back if you need to make any changes), and click Install to begin the installation.

The window displays a summary of the installation information, such as web server software, web server root directory, version, and so on.

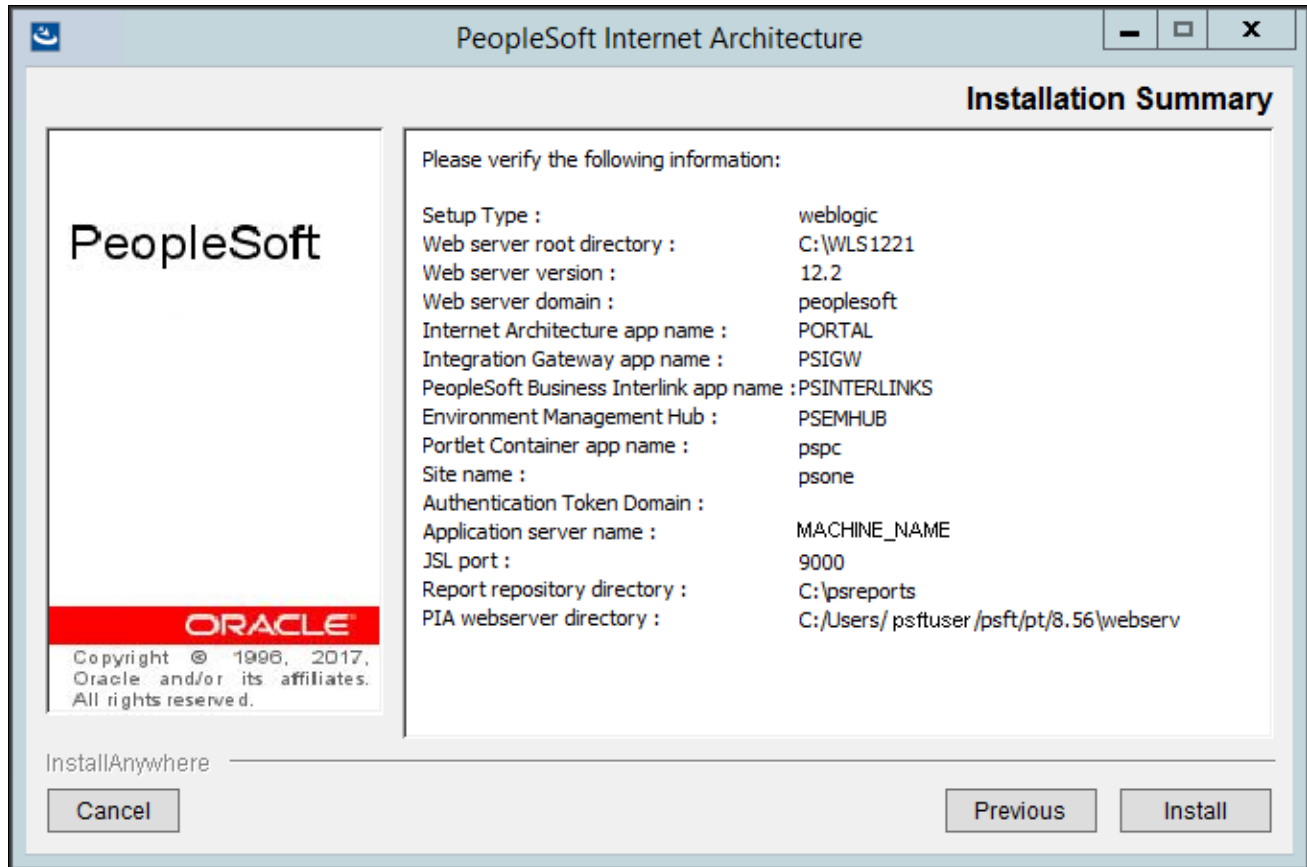

PeopleSoft Internet Architecture Installation Summary window

An indicator appears showing the progress of your installation.


19. Click Finish to complete the installation.

The default installation directory for the PIA domain is `<PIA_HOME>\webserv\<domain_name>`. The Install Complete window displays the parent installation directory for the domain. In this example, this is `C:/Users/psftuser/psft/pt/8.56/webserv`.

---

**Note.** If you are installing into an existing domain, you need to restart that domain.

---

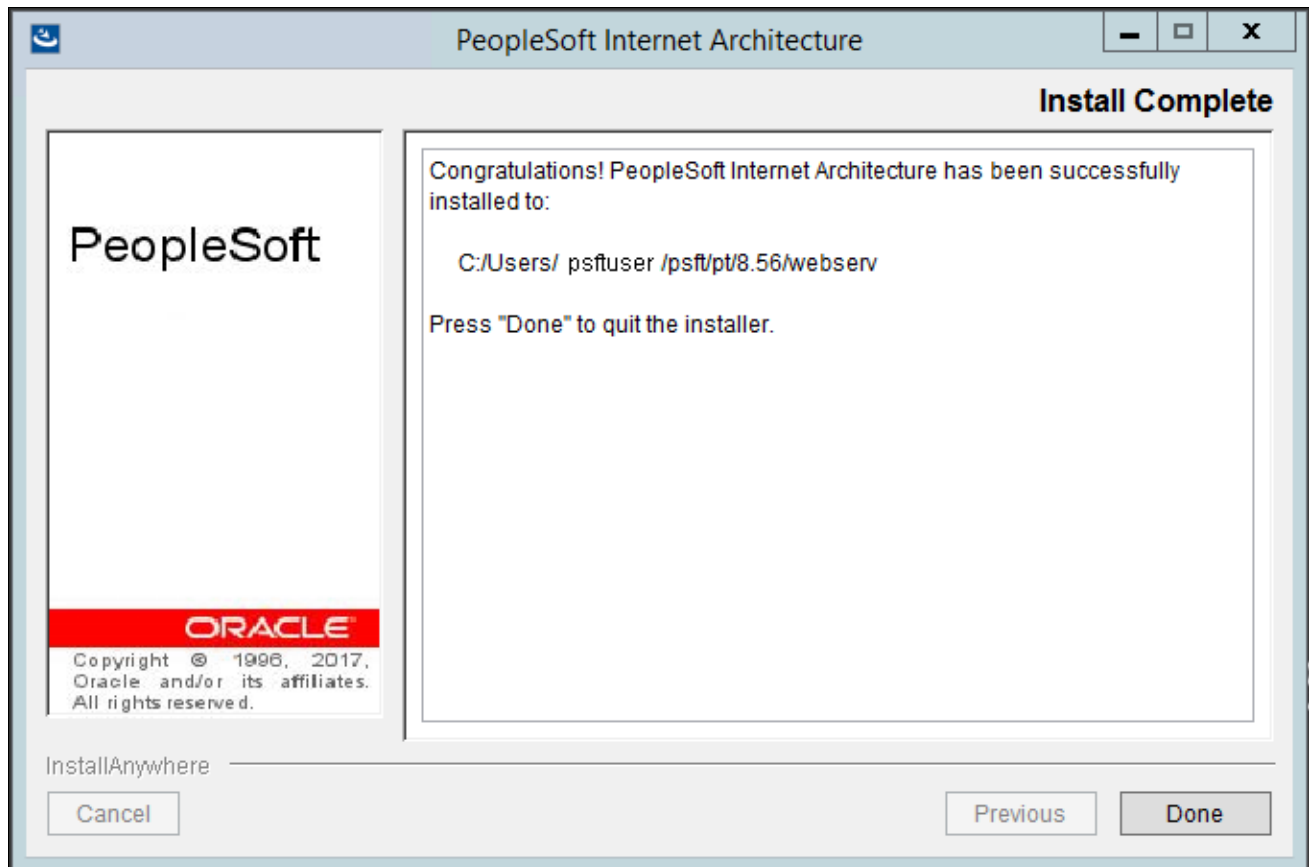

PeopleSoft Internet Architecture Install Complete window

### Task 9A-2-3: Uninstalling the PeopleSoft Pure Internet Architecture on Oracle WebLogic

To remove a PIA domain deployed on Oracle WebLogic, delete the folder `<PIA_HOME>\webserv\<domain_name>`. If there is more than one domain, delete the `domain_name` folder for every domain you want to remove.

### Task 9A-3: Installing the PeopleSoft Pure Internet Architecture on IBM WebSphere in GUI Mode

---

This section discusses:

- Prerequisites

- Installing the PeopleSoft Pure Internet Architecture on IBM WebSphere
- Uninstalling the PeopleSoft Pure Internet Architecture from IBM WebSphere

## Prerequisites

The information in this section applies to the installation of PeopleSoft Pure Internet Architecture (PIA) on an IBM WebSphere Application Server. PeopleSoft PeopleTools 8.52 and later releases require a 64-bit IBM WebSphere ND installation. PeopleSoft PeopleTools 8.56 supports 64-bit IBM WebSphere 9.0.0.0. Review the following points before beginning the installation:

- Before installing the PeopleSoft Pure Internet Architecture on IBM WebSphere Application Server Network Deployment, (referred to here as IBM WebSphere ND) you must have installed the IBM WebSphere ND software.
- Each IBM WebSphere Application Server runs one PeopleSoft Pure Internet Architecture application. If you need to install more than one PeopleSoft Pure Internet Architecture application on your IBM WebSphere Application Server, you must run the PIA installation again.
- When installing PIA on IBM WebSphere ND, you must work with a local copy of the PIA installation software; you cannot install remotely. If you are doing the installation on a machine other than the one on which you installed PeopleSoft PeopleTools, copy the `PS_HOME\setup\PsmPPIAInstall` directory to the local machine and keep the same directory structure.
- Both IBM WebSphere Application Server Network Deployment and PeopleSoft Pure Internet Architecture need to be installed and deployed using the same user ID. Following this requirement avoids any security and profile management issues.

## See Also

"Installing Web Server Products," Installing IBM WebSphere Application Server

## Task 9A-3-1: Installing the PeopleSoft Pure Internet Architecture on IBM WebSphere


To install PIA on IBM WebSphere ND:

1. Go to `PS_HOME\setup\PsmPPIAInstall`.

2. Double-click on `setup.bat`.

See "Using the PeopleSoft Installer," Running the PeopleSoft Installer, for setup command options.


The Welcome window appears with the PeopleSoft PeopleTools version, which is 8.56 in this example.

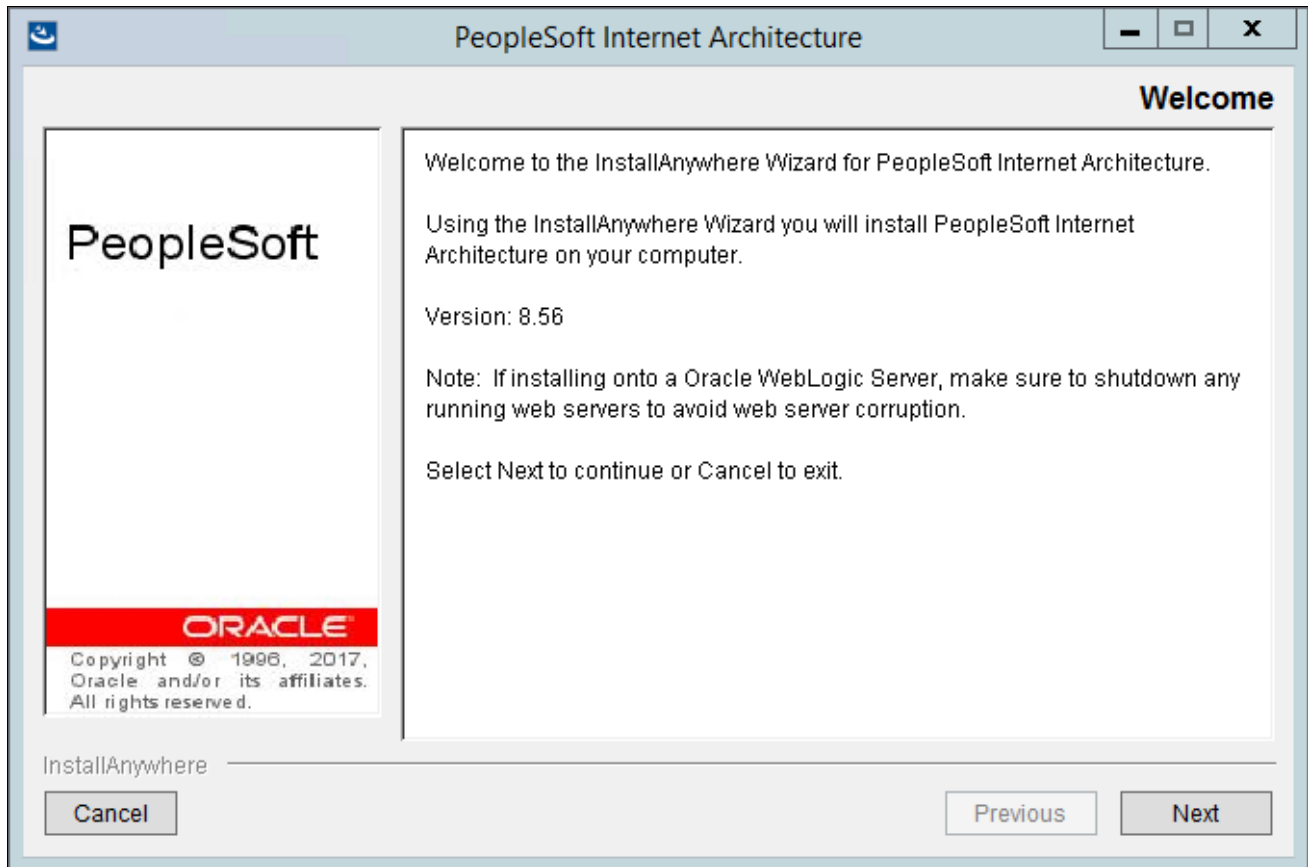

PeopleSoft Internet Architecture Welcome window


3. Click Next in the Welcome window, and specify the directory where you want to install the PeopleSoft Pure Internet Architecture, referred to here as *PIA\_HOME*.

The default path for *PIA\_HOME* is the *PS\_CFG\_HOME* path. In this example, the directory is C:\Users\psftuser\psft\pt\8.56.

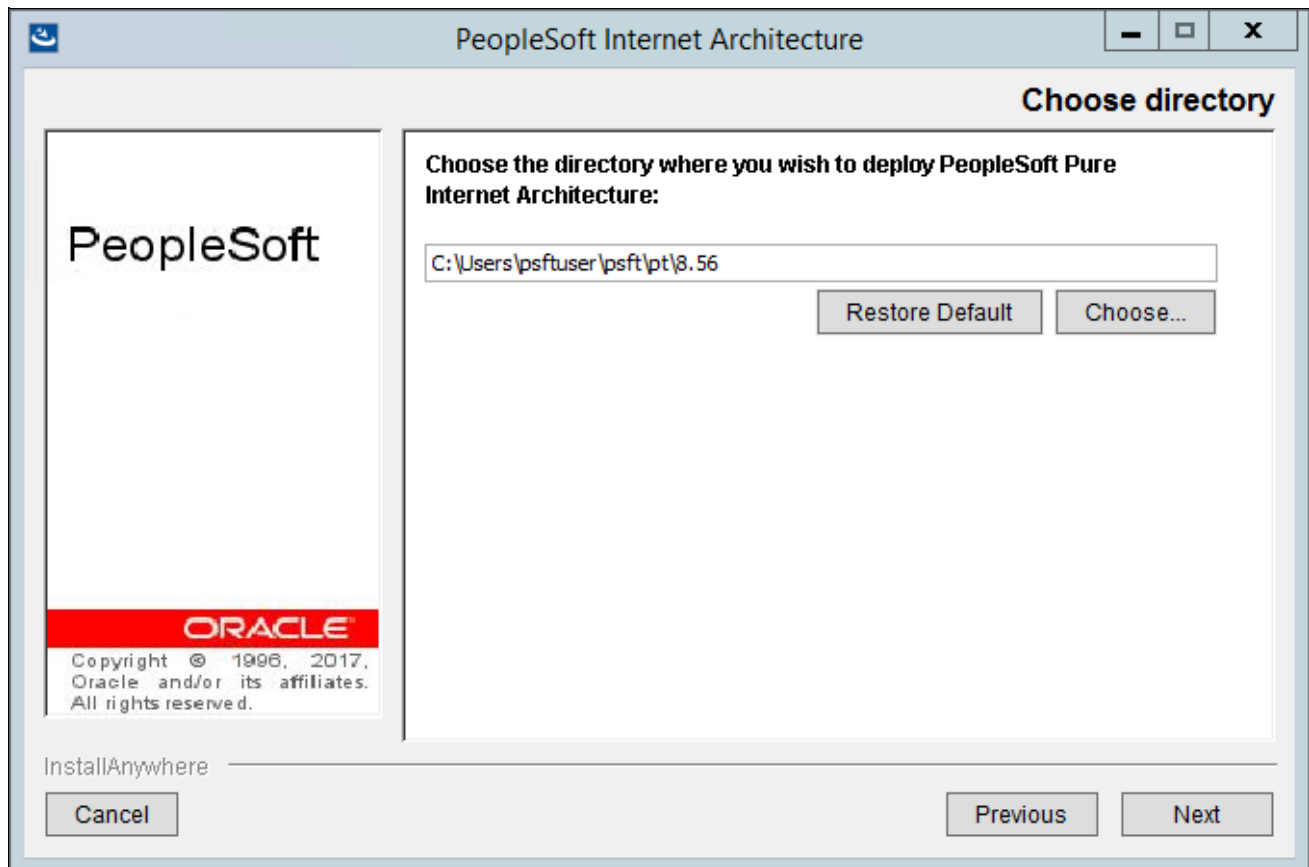

PeopleSoft Internet Architecture Choose directory window


- 4. Select the option IBM WebSphere Server as the installation type as shown in this example, and click Next.

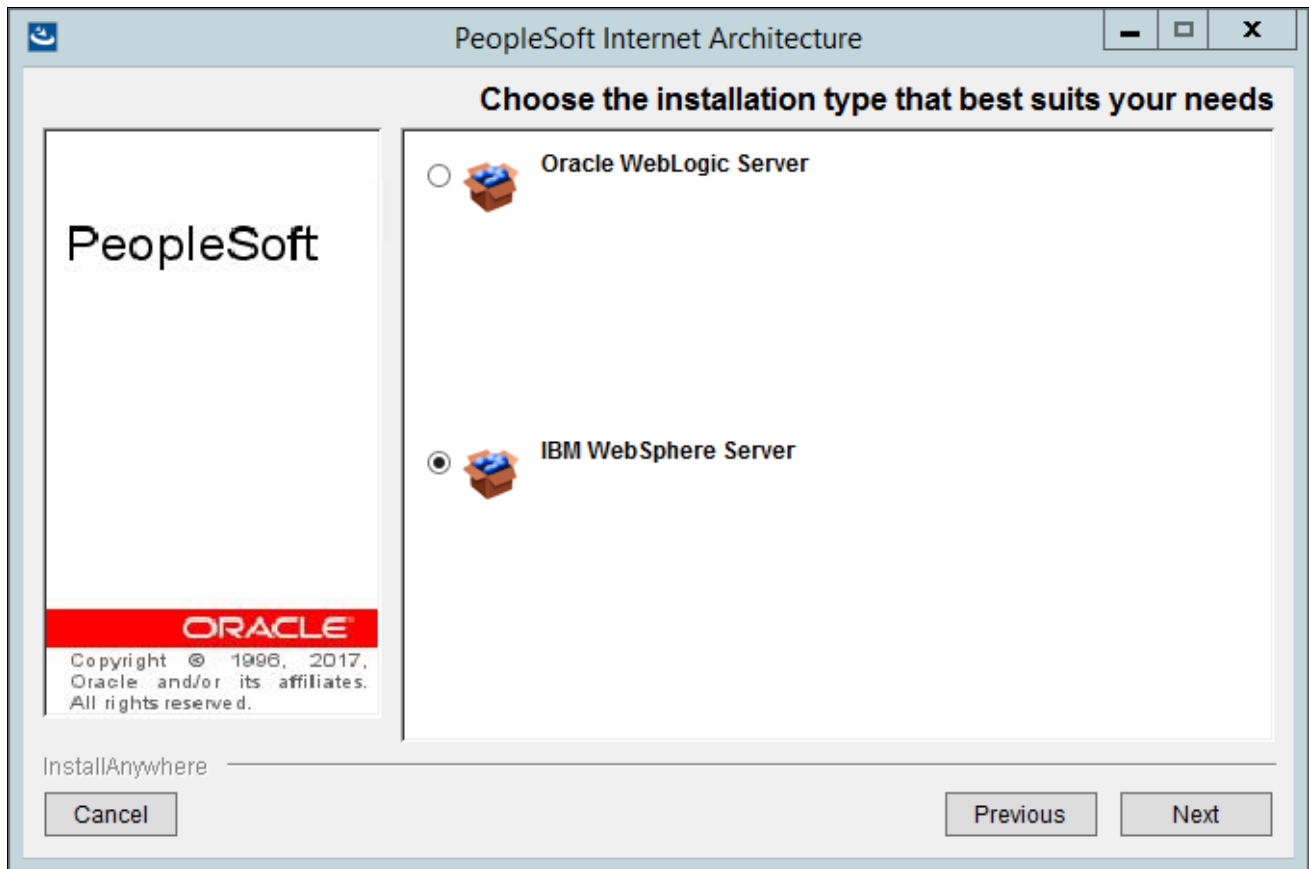

PeopleSoft Internet Architecture Choose the installation type that best suits your needs window

5. Specify the directory where IBM WebSphere ND was installed, referred to as *WAS\_HOME*.

The WebSphere Application Server directory in this example is C:\IBM\WebSphere\AppServer. Click Next.

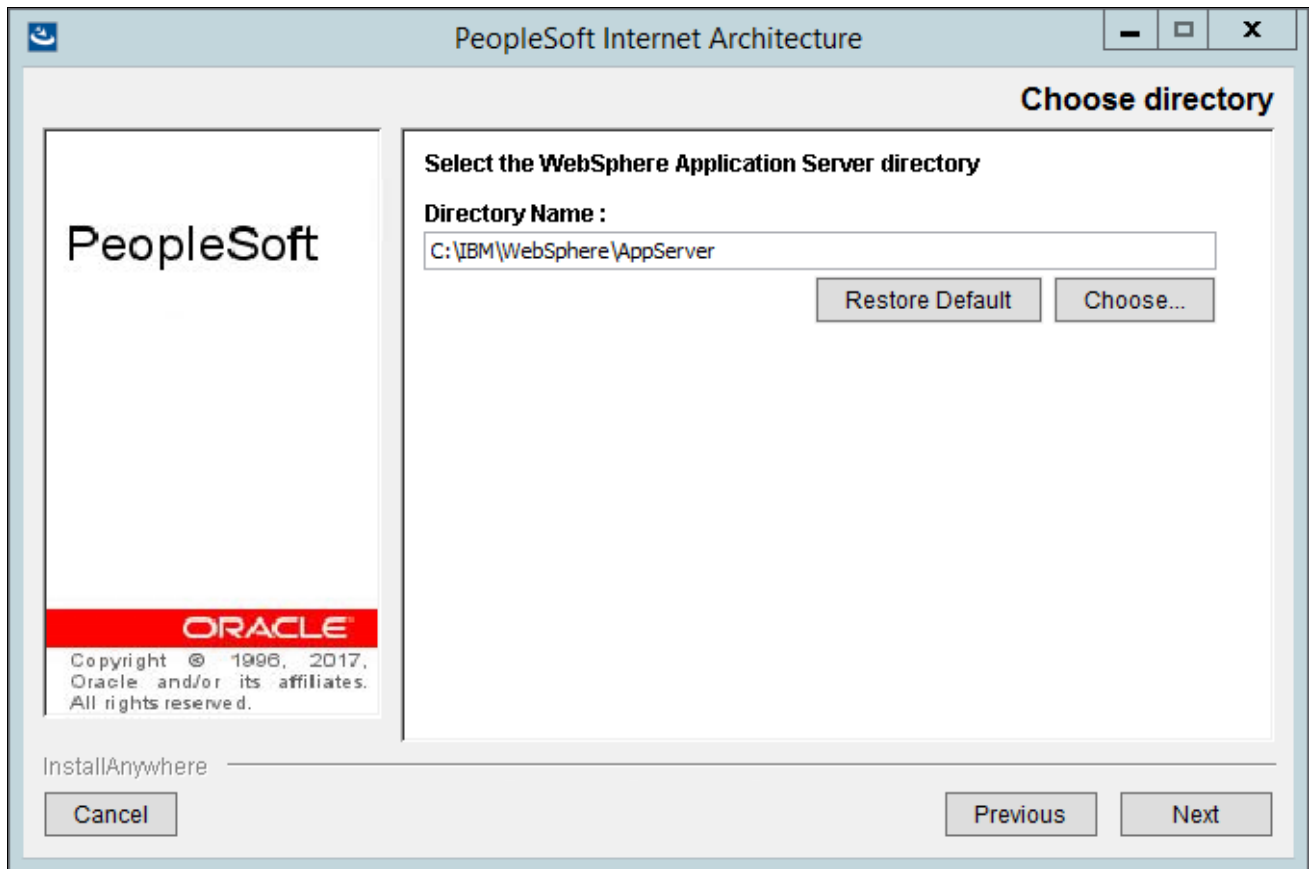


PeopleSoft Internet Architecture Choose directory window



6. Enter an application (domain) name or accept the default name on the Domain Type window. Select the type of configuration from the options Single Server Installation or Multi Server Installation.

If the PIA installer cannot detect any existing IBM WebSphere applications, only the option Create New WebSphere Application is available. The default name is peoplesoft as shown in this example.

**Note.** The name you specify here for each application must be unique for each IBM WebSphere node.

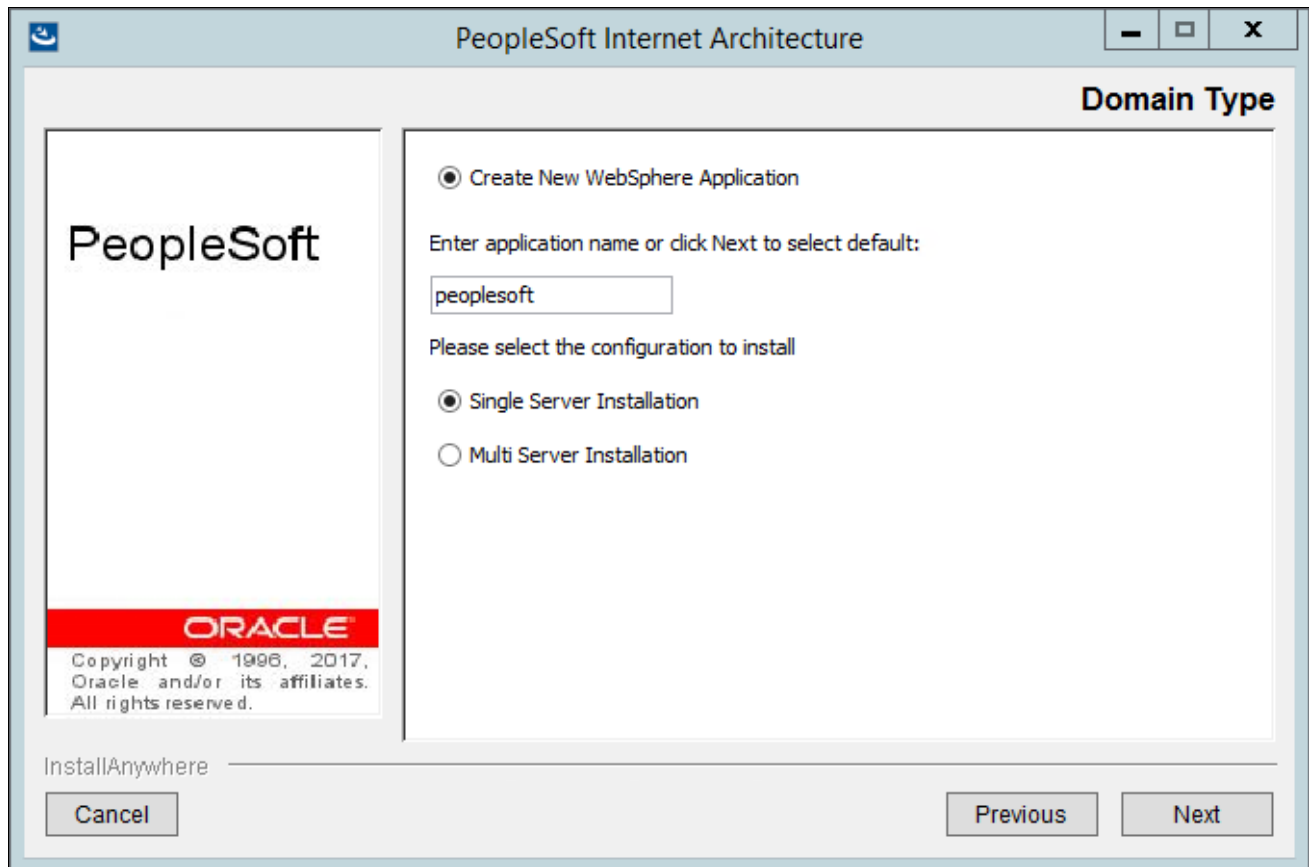

PeopleSoft Internet Architecture Domain Type window for creating a new WebSphere Application

- *Single Server Installation*

The Single Server Installation option creates one WebSphere Application Server profile to hold all the PeopleSoft web applications. The installer uses the application name you enter for the new profile's name.

- *Multi Server Installation*

The Multi Server Installation option creates a single profile with the name you enter as the application name on this page. The profile includes two servers, which deploy discrete functionality and are found on different ports, as specified in the following table:

| Server Name | Purpose                                                            | HTTP or HTTPS Port Number |
|-------------|--------------------------------------------------------------------|---------------------------|
| server1     | PORTAL applications                                                | X                         |
| psemhub     | PeopleSoft Environment Management Framework applications (PSEMHUB) | X+1                       |


7. If there are existing IBM WebSphere applications on your system, select one of the options Create New WebSphere Application or Existing WebSphere Application.

If you select Create New WebSphere Application, the installation process automatically generates a valid domain name in the domain name field, such as peoplesoft1.

If you attempt to enter an invalid domain name, you see a prompt asking you to enter a new domain name or choose an existing domain.

8. If you select the Existing WebSphere Application option, you can choose from a drop-down list of existing application names, and can select whether to install an additional PeopleSoft site, redeploy PeopleSoft Internet Architecture, or deploy additional PeopleSoft application extensions.

**Note.** Make sure the server is up and running before installing an additional PeopleSoft site, redeploying PIA, or deploying additional PeopleSoft application extensions.

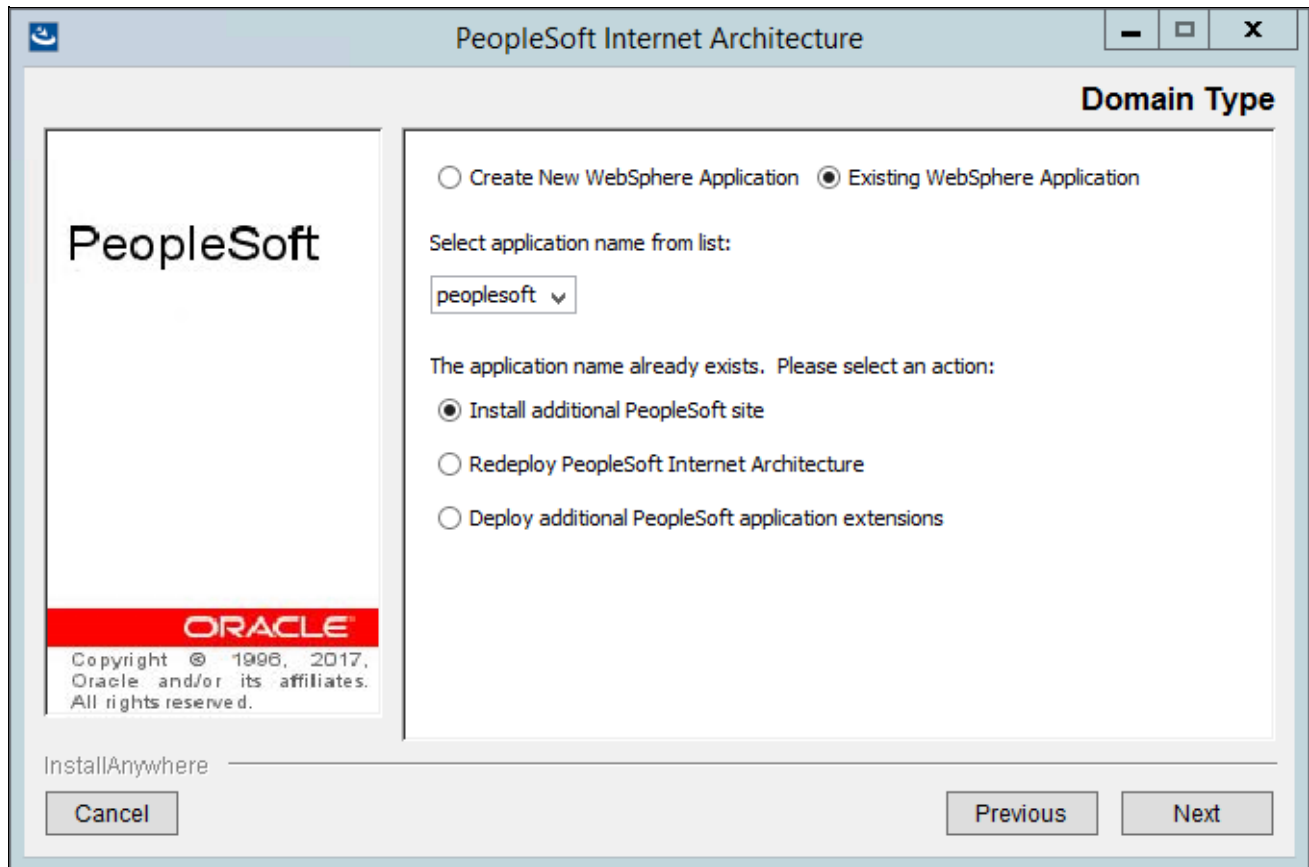

PeopleSoft Internet Architecture Domain Type window for an existing WebSphere Application

#### *Install additional PeopleSoft site*

Select this option to install only the necessary files for defining an additional PeopleSoft site onto the existing IBM WebSphere ND web server configuration.

#### *Redeploy PeopleSoft Internet Architecture*

This selection affects all of the PeopleSoft Pure Internet Architecture web applications installed to the local IBM WebSphere Application Server profile. The redeployment process updates all of the web components of the PeopleSoft Pure Internet Architecture.

#### *Deploy additional PeopleSoft application extensions*

This option is solely for use with PeopleSoft product applications. PeopleSoft application extensions are provided with certain PeopleSoft applications, and this option allows you to deploy those extensions. Consult the installation documentation for your PeopleSoft application to see whether this option is appropriate. PeopleSoft PeopleTools does not use application extensions.

9. Enter the IBM WebSphere administrator Login ID, and enter the password two times.

**Note.** The default administrator login ID is system as shown in this example. The password must be at least 8 alphanumeric characters with one number or special character. Use these criteria to log into the IBM WebSphere administrative console.

If you selected Create New WebSphere Application in the previous step, the following window appears.

PeopleSoft Internet Architecture

**Webserver Admin Credentials**

**Please enter the administrator login and password for WebSphere profile.**

Login ID:

Password:

Re-type Password:

PeopleSoft

ORACLE


Copyright © 1996, 2017, Oracle and/or its affiliates. All rights reserved.

InstallAnywhere

Cancel Previous Next

PeopleSoft Internet Architecture Webserver Admin Credentials window

If you selected the Existing WebSphere Application option, and either Install additional PeopleSoft site or Redeploy PeopleSoft Internet Architecture, the following window appears. Enter the same Login ID and password as you entered for the original IBM WebSphere Application creation. If the Login ID and password do not match the original values, you cannot continue with the PIA installation.

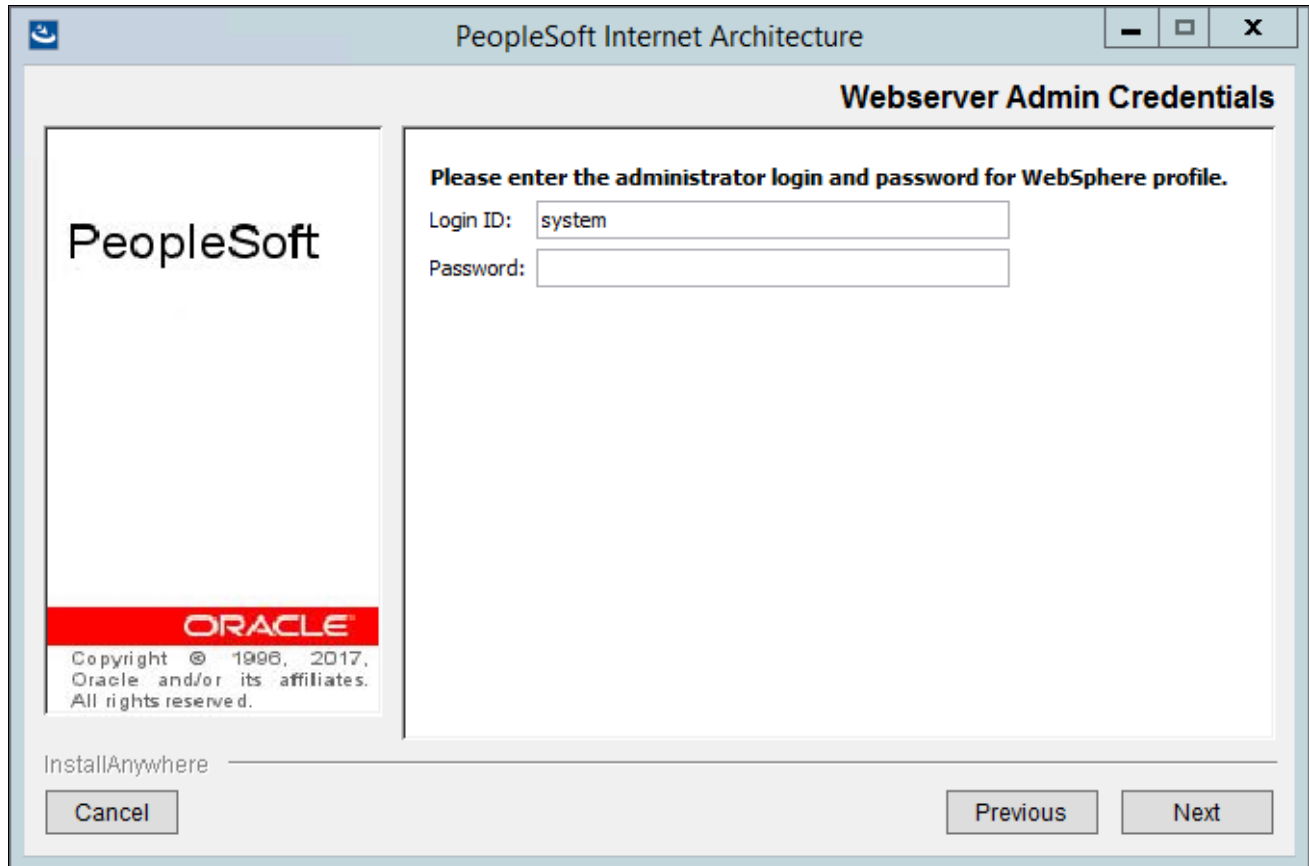


PeopleSoft Internet Architecture Webserver Admin Credentials window for existing WebSphere profile

10. If there are PeopleSoft application packages in the archives directory, the PIA installer asks whether you want to deploy them.

If you are using an existing domain, you will only be prompted if you selected Deploy additional PeopleSoft extensions.

11. Enter the Integration Gateway User and enter the password two times.


The default Integration Gateway User is administrator, as shown in this example.

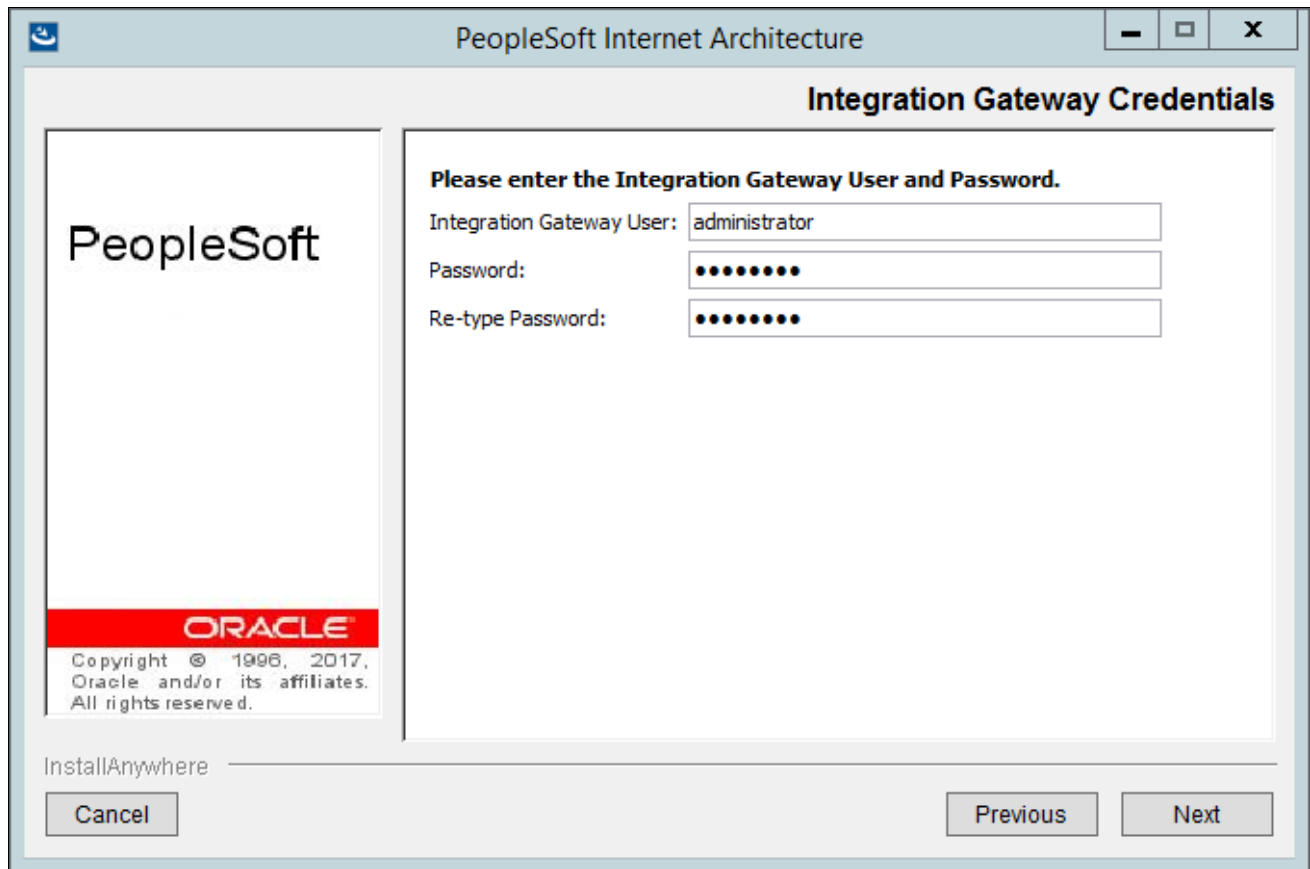

PeopleSoft Internet Architecture Integration Gateway Credentials window

12. Enter the AppServer Domain Connection password two times (optional).


In this example, the password fields are blank.

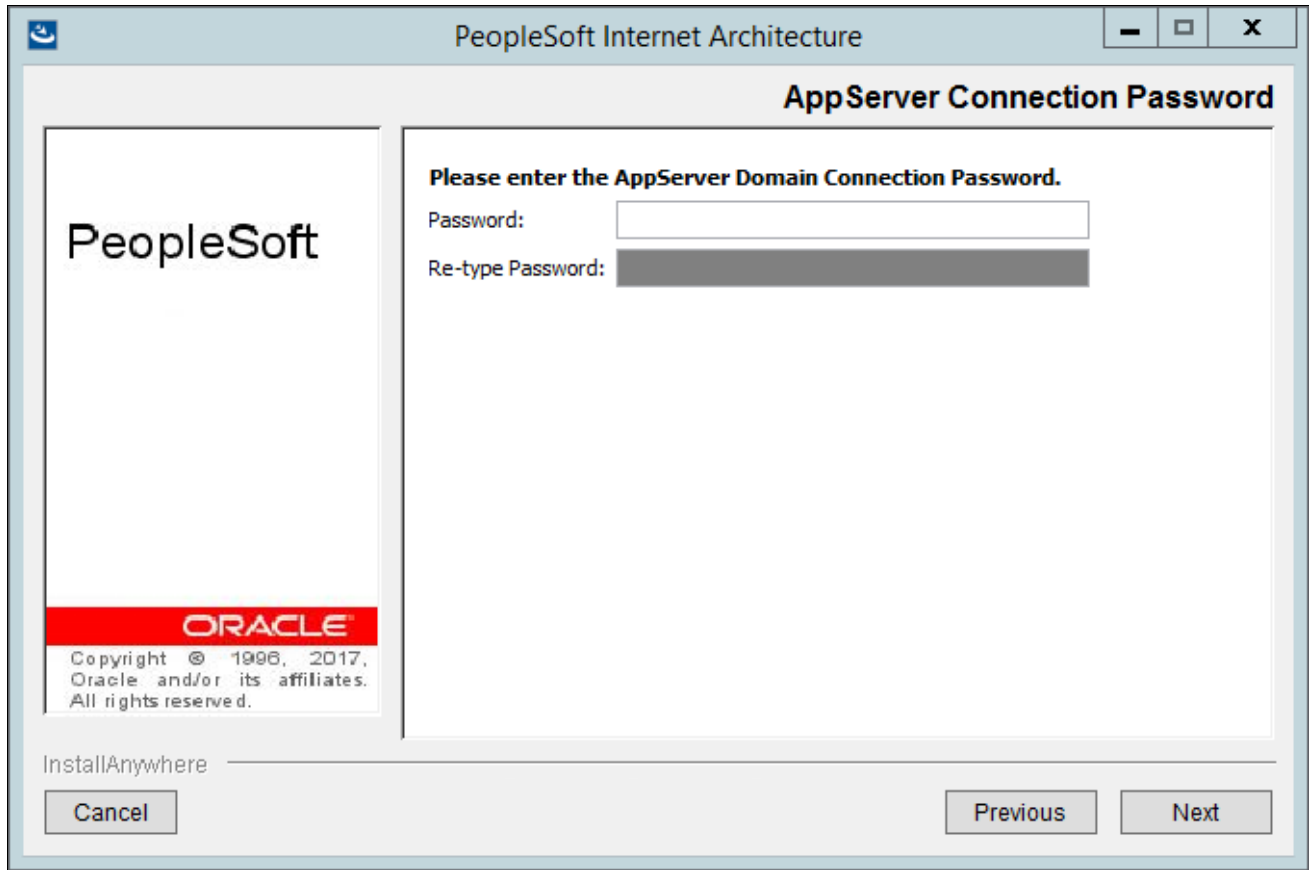

PeopleSoft Internet Architecture AppServer Connection Password window

13. Enter a PeopleSoft web site name; the default is ps as shown in this example.

**Warning!** The site name can include underscores ( \_ ), but an underscore cannot be followed by a numeric character or the string "newwin" (for example, my\_site\_3 or my\_newwin\_site).

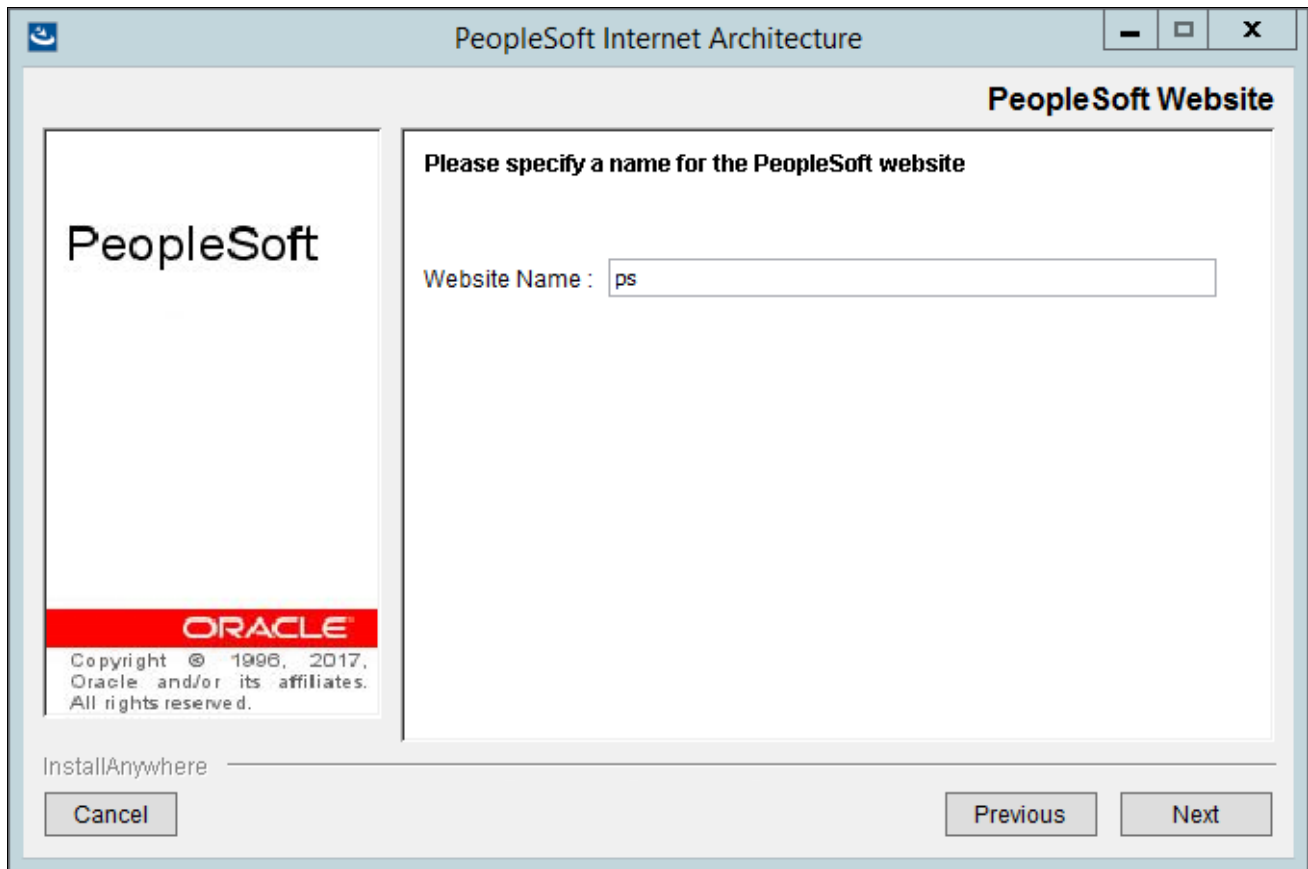

PeopleSoft Internet Architecture PeopleSoft Website window



14. Specify your application server name, its JSL (Jolt Station Listener) port number, its HTTP and HTTPS port numbers, the authentication token domain, and click Next.

The screenshot shows a window titled "PeopleSoft Internet Architecture" with a "Server Information" section. The section contains the following fields and values:

|                                        |              |
|----------------------------------------|--------------|
| AppServer Host Name:                   | MACHINE_NAME |
| Jolt Listener (JSL) Port:              | 9000         |
| HTTP Port:                             | 80           |
| HTTPS Port:                            | 443          |
| Authentication Token Domain:(optional) | .example.com |

Below the fields is a note: "Note: Load balancing and failover can be directly defined in the configuration.properties f". At the bottom of the window are three buttons: "Cancel", "Previous", and "Next".

PeopleSoft Internet Architecture Server Information window

- *AppServer name*

For AppServer name, enter the name of your application server. The name is MACHINE\_NAME in this example.

- *JSL port*

For the JSL port, enter the JSL port number you specified when setting up your application server. (The default value is 9000 as shown in this example.)

See "Configuring the Application Server on Windows."

- *HTTP and HTTPS ports*

The default HTTP port is 80, and the default HTTPS port is 443, as shown in this example.

When you enter HTTP and HTTPS port numbers, they will not be recognized until you restart your WebSphere server.

In the case of Multi Server Installation type, HTTP and HTTPS ports *cannot* be consecutive numbers. The range for port number will be <Port#>-<Port#>+1 for the two application servers that the install creates. For example, if you select HTTP Port as 5555 and HTTPS port as 5560 then the ports are assigned as given below.

| Server Name | HTTP Port Number | HTTPS Port Number |
|-------------|------------------|-------------------|
| server1     | 5555             | 5560              |
| psemhub     | 5556             | 5561              |

- *Authentication Token Domain*


The value you enter for Authentication Token Domain must match the value you specify for the authentication domain when configuring your application server, as described earlier in this book. In addition, certain installation configurations require that you specify an authentication domain.

See Using Authentication Domains in the PeopleSoft Pure Internet Architecture Installation.

If you enter a value for the Authentication Token Domain, the URL to invoke PIA must include the network domain name in the URL. For example, if you do not enter an authentication domain, the URL to invoke PIA is `http://MachineName:port/ps/signon.html`. If you do enter a value for the authentication domain (for example, `.myCompany.com`), the URL to invoke PIA is `http://MachineName.myCompany.com:port/ps/signon.html`. The URL must also comply with the naming rules given earlier in this chapter.

See Understanding the PeopleSoft Pure Internet Architecture.

15. If you select the Existing WebSphere Application option, enter the server name and Jolt Listener Port.

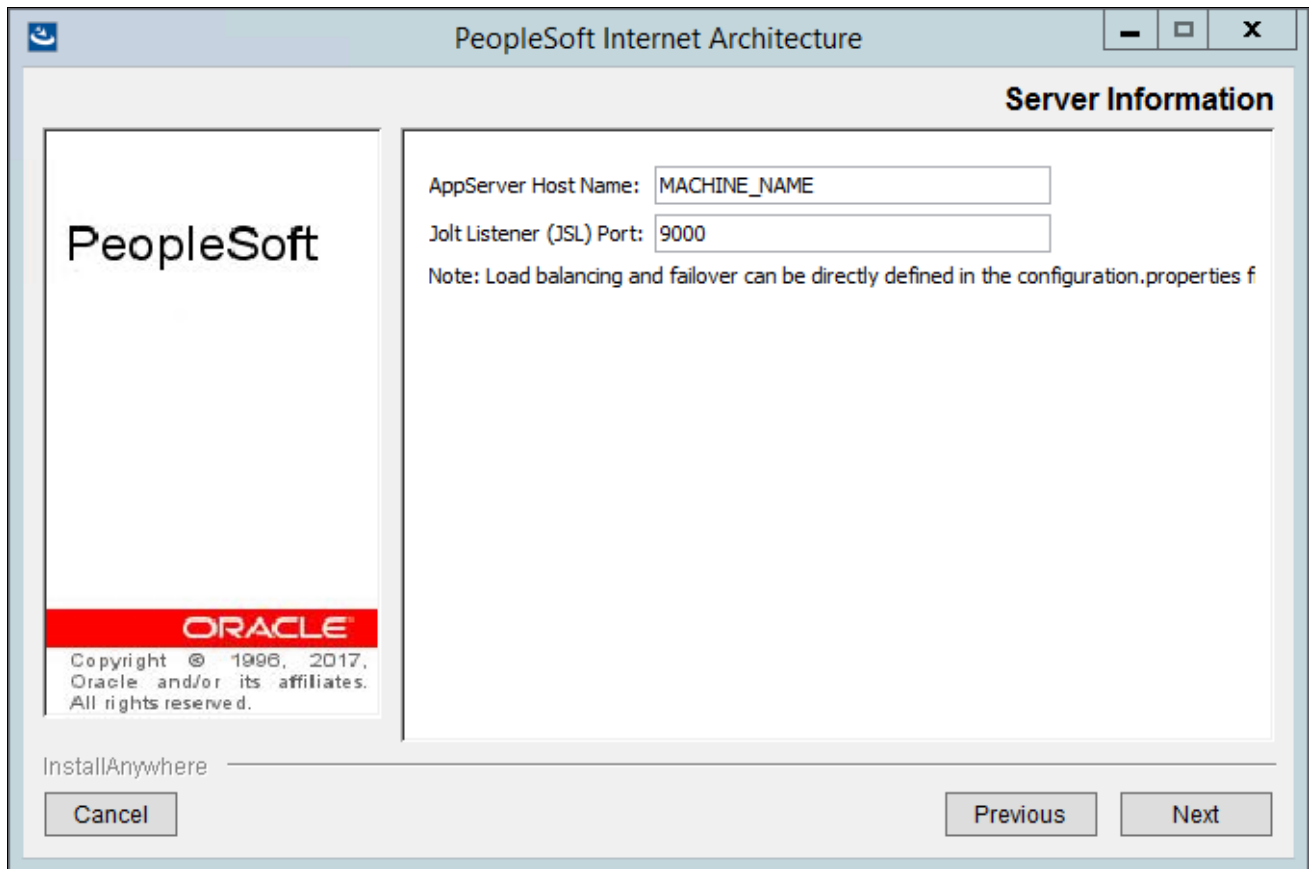

PeopleSoft Internet Architecture Server Information window for an existing WebSphere application

## 16. Enter the details for the web profile, PROD, or enter another name.

The following example shows the default web profile name, PROD, and default user ID, PTWEBSERVER.

The web profile name will be used to configure this web site. You can specify one of the other pre-delivered web profiles, DEV, TEST, or KIOSK, or enter a different name. If you intend to use a Web Profile User ID other than the default, be sure to review the information on web profile configuration and security.

Enter and re-enter the password that you set for the User Profile for the User ID password in this step. The password must be at least 8 alphanumeric characters.

For more information on configuring web profiles, see the *PeopleTools: Portal Technology* product documentation.

**Note.** If the PeopleSoft PeopleTools version of your database is *below* 8.44, then you will need to add the PTWEBSERVER User Profile before you upgrade to the current PeopleSoft PeopleTools release. The User Profile must include the PeopleTools Web Server role, but do not grant any other roles. Enter the password that you set for the User Profile for the User ID password in this step, as shown in this example. See the product documentation *PeopleTools: Security Administration* for the steps required to add a User Profile.

PeopleSoft Internet Architecture

### Web Profile Credentials

Please enter the Name of the Web Profile used to configure the webserver. The user id and password will be used to retrieve the web profile from the database. (NOTE: Other available preset web profile names are "TEST", "DEV", and "KIOSK".)

Web Profile Name:

User ID:

Password:

Re-type Password:

PeopleSoft

ORACLE

Copyright © 1996, 2017, Oracle and/or its affiliates. All rights reserved.

InstallAnywhere

Cancel Previous Next

PeopleSoft Internet Architecture Web Profile Credentials window

- 17. Specify the root directory for the Report Repository (c:\psreports by default as shown in this example), and click Next.


Make sure that the report repository directory is shared, and that you have write access.

---

**Note.** In setting up the Process Scheduler to transfer reports, if you choose the FTP protocol, use the same directory for the Home Directory as you use here for the report repository.

---


See "Setting Up Process Scheduler on Windows," Setting Up Process Scheduler to Transfer Reports and Logs to the Report Repository.

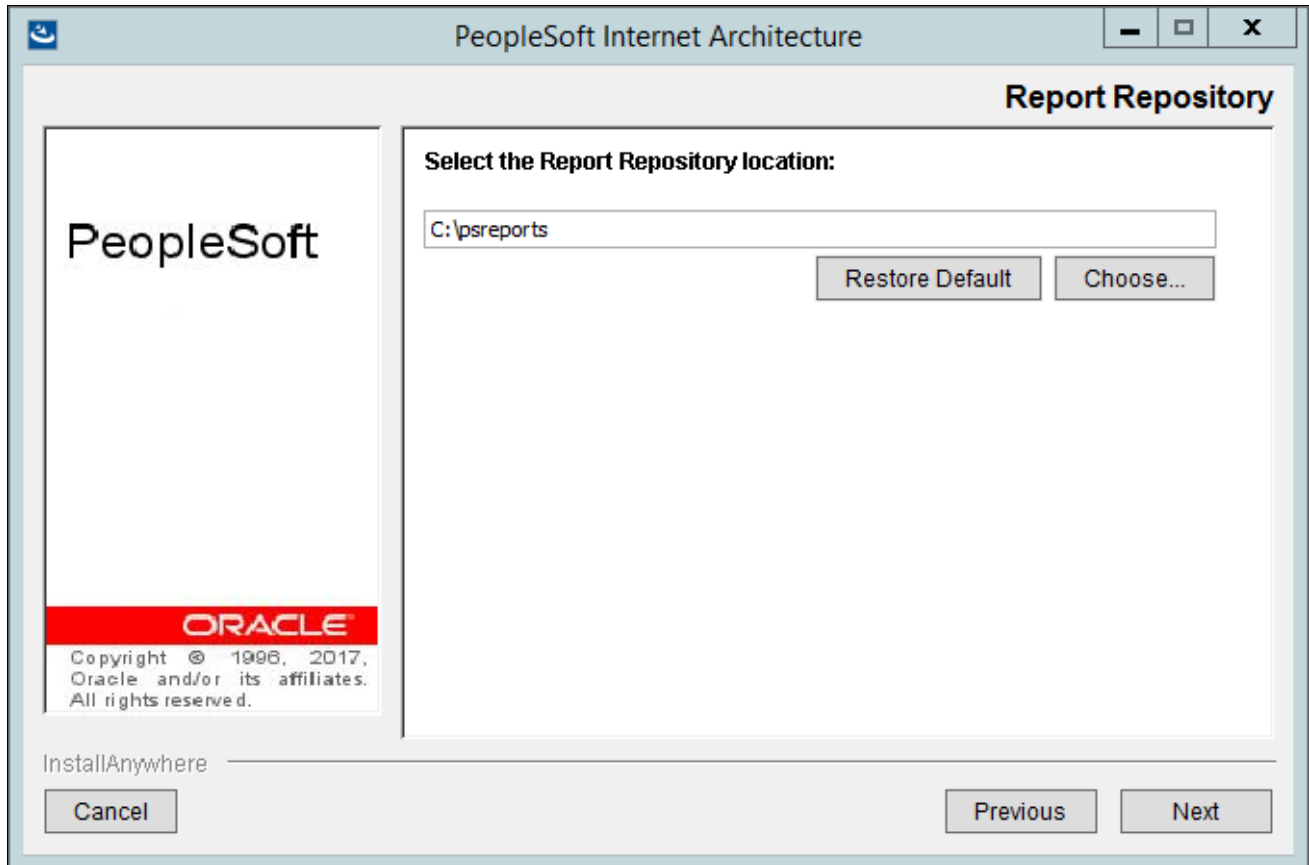

PeopleSoft Internet Architecture Report Repository window

## 18. Verify all your selections on the summary window.


The window lists the installation information, such as the web server type, directory, version, and so on. Click Back if you need to make any changes and click Next to begin the installation. An indicator shows the progress of your installation.

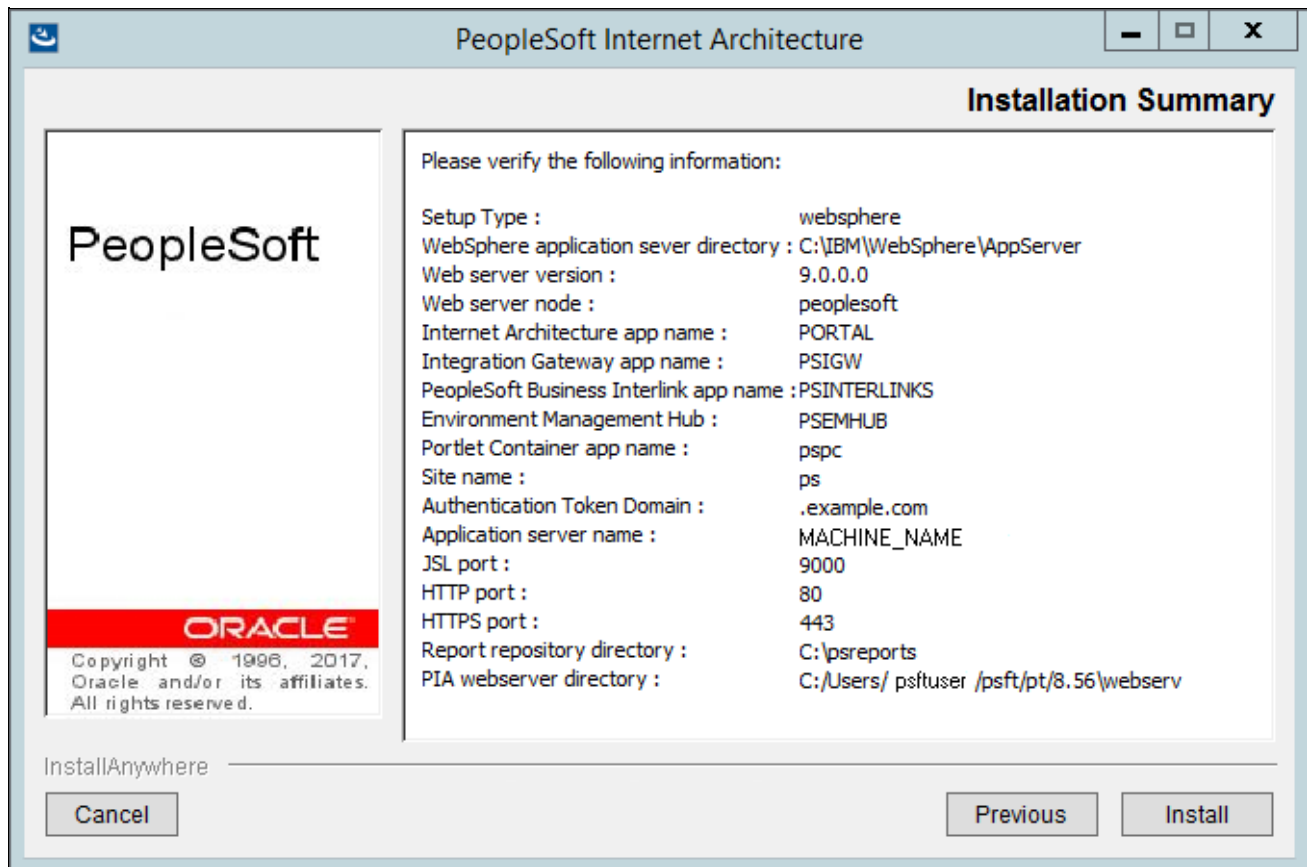

PeopleSoft Internet Architecture Installation Summary window

## 19. Click Done to complete the installation.

The default installation directory for a specific PIA profile is `<PIA_HOME>\webserv\<profile_name>`. The Install Complete window displays the parent installation directory for the domain. In this example, this is `C:/Users/psftuser/psft/pt/8.56/webserv`.

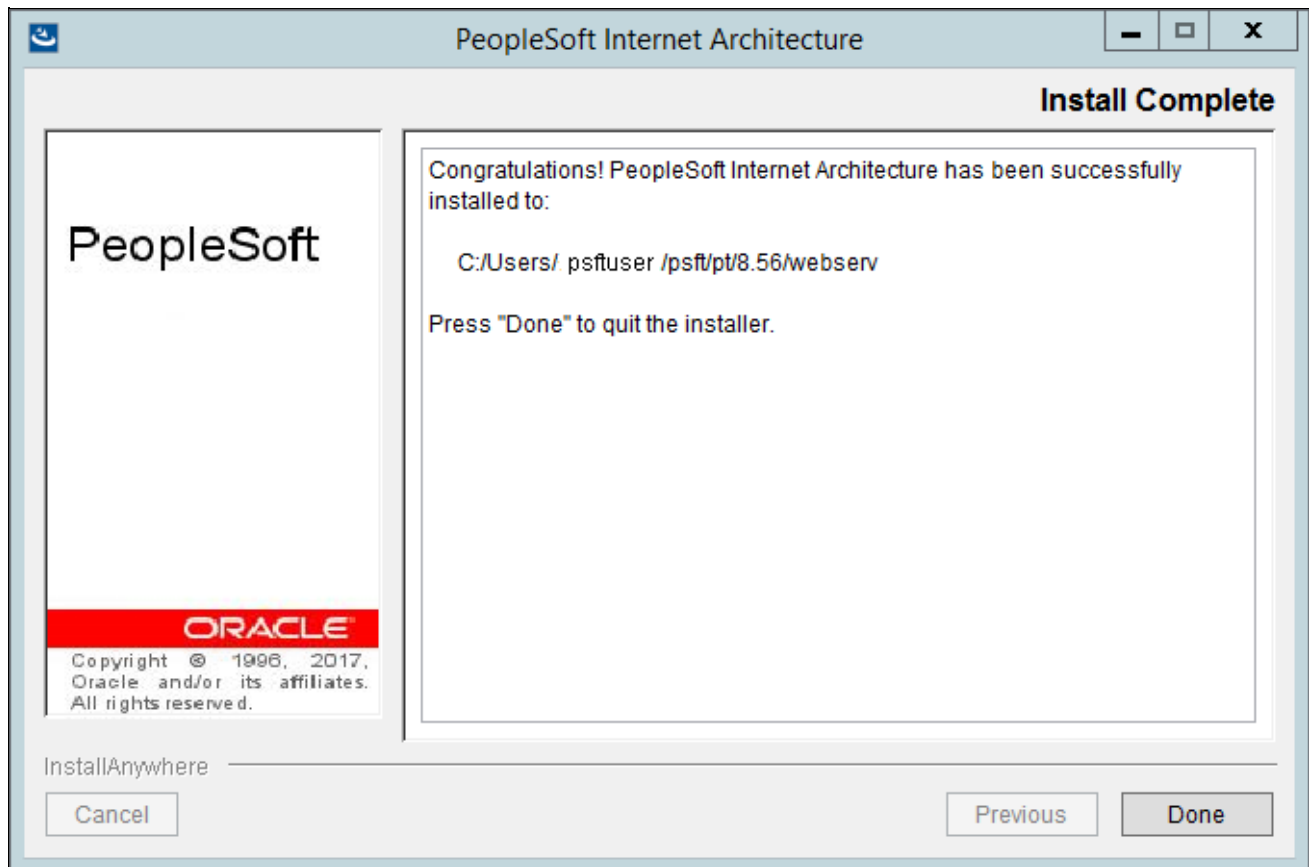

PeopleSoft Internet Architecture Install Complete window

## Task 9A-3-2: Uninstalling the PeopleSoft Pure Internet Architecture from IBM WebSphere

You cannot uninstall PeopleSoft Pure Internet Architecture simply by deleting `<PIA_HOME>\webserv\<profile_name>`, without uninstalling it from IBM WebSphere Administration Console. If you do so, the IBM WebSphere registry becomes corrupt, and subsequent attempts to install PeopleSoft Pure Internet Architecture will fail. Instead, if necessary, you must uninstall PeopleSoft Pure Internet Architecture on IBM WebSphere as described here.

To uninstall PeopleSoft Pure Internet Architecture on IBM WebSphere:

1. Open the IBM WebSphere Administration Console by entering the following URL in a browser:

`http://<machine-name>:<administrative_console_port>/ibm/console`

To find the value for `<administrative_console_port>`, refer to `<PIA_HOME>\webserv\<profile_name>\logs>AboutThisProfile.txt`.

2. Log in as any user.
3. Choose Applications, Application Types, Websphere enterprise applications.

4. Select the check boxes for the PeopleSoft Pure Internet Architecture applications you want to uninstall, and click Stop.
5. Select the check boxes for the PeopleSoft Pure Internet Architecture applications you want to uninstall, and click Uninstall.
6. Save your configuration.
7. Log out of the IBM WebSphere Administration Console.
8. Stop WebSphere server using one of the following commands:

On Microsoft Windows:

```
<PIA_HOME>\webserv\<>profile_name>\bin\stopServer.bat server1
```

On UNIX or Linux:

```
<PIA_HOME>/webserv/<profile_name>/bin/stopServer.sh server1
```

9. In addition to uninstalling the application, you need to remove the WebSphere Application Server profile, which was created during PIA install, to complete the PIA uninstallation.

To uninstall the WebSphere Application Server profile, run the following steps:

- a. Go to <PIA\_HOME>\webserv\<>profile\_name>\bin
- b. Run one of the following commands, where <profile\_name> indicates the application name that you have selected during the PIA install.

On Microsoft Windows:

```
manageprofiles.bat -delete -profileName <profile_name>
```

On UNIX or Linux:

```
manageprofiles.sh -delete -profileName <profile_name>
```

- c. Delete the directory <PIA\_HOME>\webserv\<>profile\_name>

## **Task 9A-4: Configuring the SSL/TLS Port for JSL**

---

Supply the SSL/TLS port for JSL in the configuration.properties file for the web server.

See *PeopleTools: Integration Broker*, "Installing Web Server-Based Digital Certificates."

1. Using a text editor, open the configuration.properties file in the web server deployment folder located here:  
<PIA\_HOME>\webserv\<>DOMAIN\_NAME>\application\peoplesoft\PORTAL.war\WEB\_INF\psftdoc\ps.
2. Locate the psserver section and enter the application server name and the SSL/TLS port.

Enter the SSL/TLS port that you specified for the JSL SSL Port when setting up the application server domain.

See *Creating, Configuring, and Starting an Initial Application Server Domain*.

```
psserver=<machine_name>:<SSL_port_for_JSL>
```

3. Locate the section Keystore password for ssl connection.

If you reset the SSL/TLS Java Keystore password, enter it here. Otherwise, accept the default value. The default Java Keystore file is located in <PIA\_HOME>\webserv\<>DOMAIN\_NAME>\piaconfig\keystore\pskey.

```
#Keystore password for ssl connection
```



```
KeyStorePwd=={V1.1}7m4OtVwXFNyLc1j6pZG69Q==
```

4. Save and close the file.

## Task 9A-5: Testing and Administering the PeopleSoft Pure Internet Architecture Installation

---

This section discusses:

- Verifying the PeopleSoft Pure Internet Architecture Installation
- Starting and Stopping Oracle WebLogic
- Starting and Stopping IBM WebSphere Application Servers
- Using PSADMIN to Start and Stop Web Servers
- Accessing the PeopleSoft Signon

### Verifying the PeopleSoft Pure Internet Architecture Installation

After installing the PeopleSoft Pure Internet Architecture, you should make sure that your configuration is functional. You can test this by signing on to PeopleSoft, navigating within the menu structure, and accessing pages. (Make sure the application server is configured and booted.) This section includes procedures to start and stop the Oracle WebLogic or IBM WebSphere web servers whenever necessary.

### Task 9A-5-1: Starting and Stopping Oracle WebLogic

If you are using the Oracle WebLogic web server, you need to sign on to Oracle WebLogic before using these commands. If you are using IBM WebSphere instead, go on to the next section. Use the following commands in the Oracle WebLogic domain directory.

---

**Note.** Starting from Oracle WebLogic 9.2 and later releases, all the Life-cycle management scripts and other batch scripts for the PIA server on Oracle WebLogic are located in `<PIA_HOME>\webserv\<domain_name>\bin` folder.

---

- To start Oracle WebLogic Server as a Windows service, use the following command:

Single Server:

```
installNTservicePIA.cmd
```

Multiple Servers or Distributed Servers:

```
installNTservice.cmd ServerName
```

The resulting Windows service name will be `WebLogicDomain-WebLogicServer`. For example, to install a server named `PIA` as a Windows service in a domain named `peoplesoft`, run `installNTservice.cmd PIA` and you will see "peoplesoft-PIA" as a service.

- To remove an Oracle WebLogic server Windows service, use the following command:

```
uninstallNTservicePIA.cmd Server Name
```

---

**Note.** If you modify `setenv.cmd`, then you must uninstall the service using `uninstallNTServicePIA.cmd ServerName`, and then re-run `installNTServicePIA.cmd ServerName`.

---

- To start Oracle WebLogic Server as a foreground process on a single server, use the following commands:  
On Microsoft Windows:  
`startPIA.cmd`  
On UNIX or Linux:  
`startPIA.sh`
- To start Oracle WebLogic Server as a foreground process on multiple-servers or distributed servers, use the following commands:
  1. Execute the following command:  
On Microsoft Windows:  
`startWebLogicAdmin.cmd`  
On UNIX or Linux:  
`startWebLogicAdmin.sh`
  2. Then execute:  
On Microsoft Windows:  
`startManagedWebLogic.cmd ManagedServerName`  
On UNIX or Linux:  
`startManagedWebLogic.sh ManagedServerName`
- To stop the server, use the following commands:
  - Single Server on Microsoft Windows:  
`stopPIA.cmd`  
Single Server on UNIX or Linux:  
`stopPIA.sh`
  - Multiple Servers or Distributed Servers on Microsoft Windows:  
`stopWebLogic.cmd ManagedServerName`  
Single Server on UNIX or Linux:  
`stopWebLogic.sh ManagedServerName`

For more information on working with Oracle WebLogic multiple servers or distributed servers, see the *PeopleTools: System and Server Administration* product documentation.

---

**Note.** For more information on working with Oracle WebLogic multiple or distributed servers, search My Oracle Support.

---

## **Task 9A-5-2: Starting and Stopping IBM WebSphere Application Servers**

This section discusses:


- Starting and Stopping IBM WebSphere Application Servers on Windows
- Starting and Stopping IBM WebSphere Application Servers on UNIX or Linux
- Verifying the IBM WebSphere Installation

### **Starting and Stopping IBM WebSphere Application Servers on Windows**

To start and stop the WebSphere Application Server Network Deployment 9.0.0.0 (WebSphere ND), use the WebSphere First Steps utility:

1. For example, on Microsoft Windows 2012 R2, access the Apps screen and locate the First steps utility in the IBM WebSphere category.

The following example shows the First steps window for the profile *peoplesoft*:

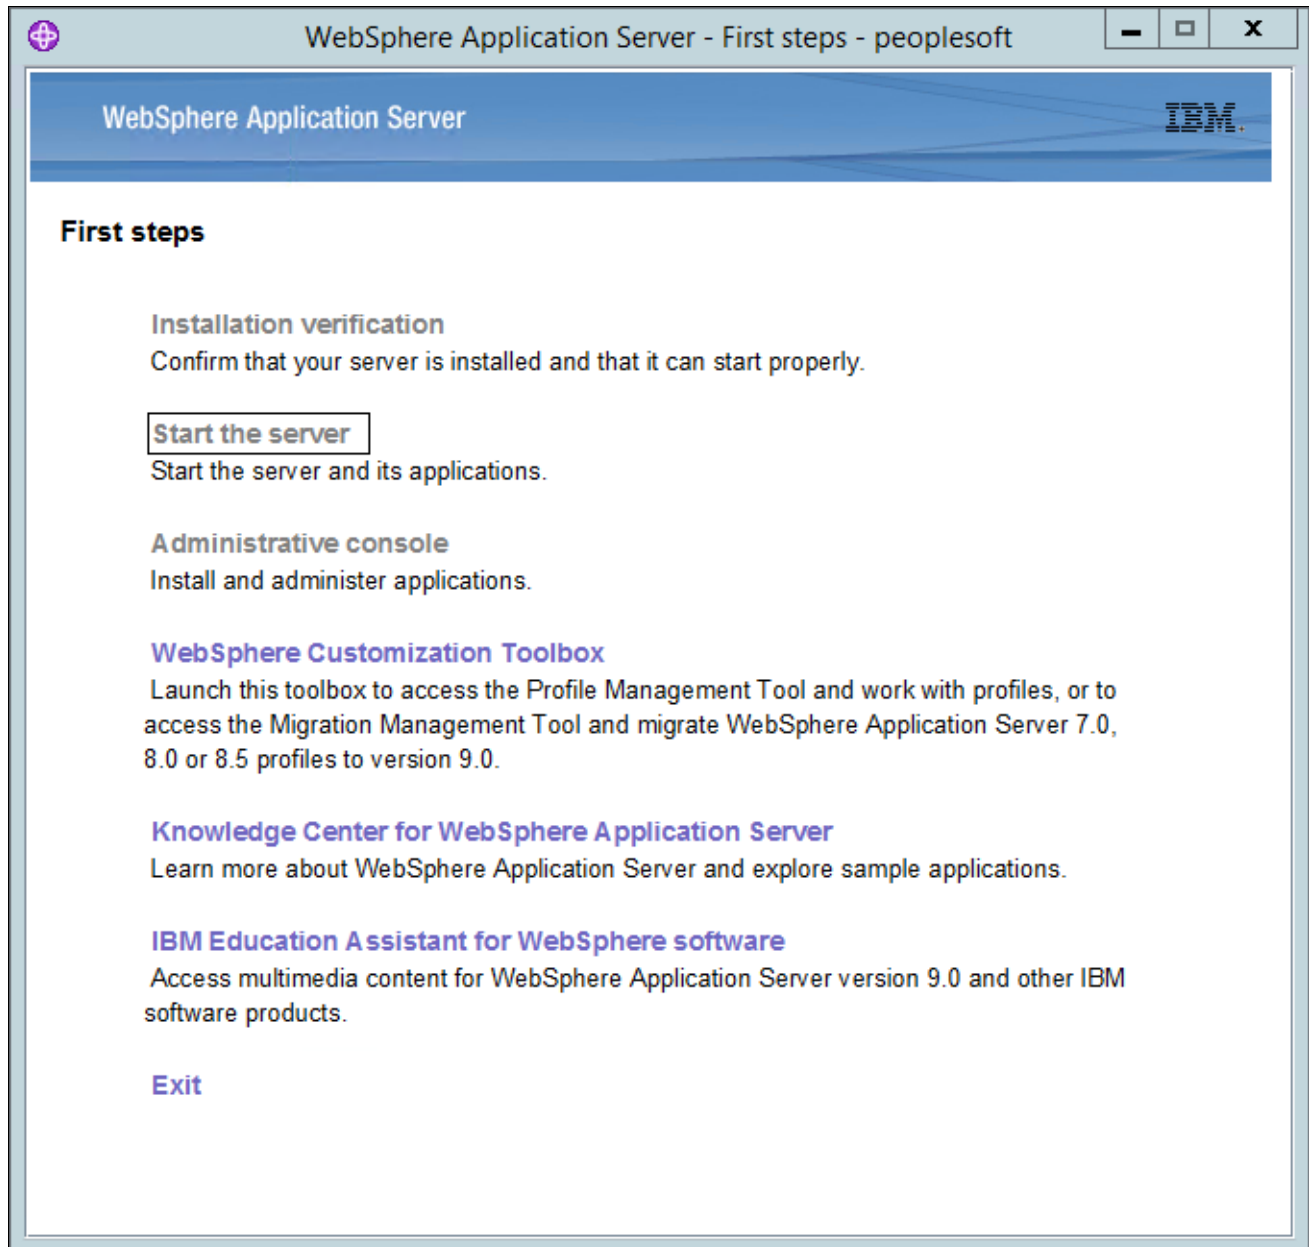

WebSphere Application Server - First steps window

2. Select the link Start the server.

If the server starts properly, a verification window appears with several messages about the initialization process.

- To verify whether the server was installed and can start properly, click the link Installation Verification on the First Step window and review the messages.

```

[5/17/17 18:34:55:850 MDT] 00000001 FfdcProvider W com.ibm.ws.ffdc.impl.FfdcProvider logIncident FFDC1003: FFDC Incident emitted on C:\Users\
[5/17/17 18:35:04:917 MDT] 00000001 SibMessage W [ ] CWSJY0003W: MQJCA5001: WMQ messaging : '9.0.0.0-p900-L160509.1'.
[5/17/17 18:35:08:352 MDT] 0000004c AuthConfigFac W SECJ8032W: AuthConfigFactory implementation is not defined, using the default JASPI factory imple
[5/17/17 18:35:11:601 MDT] 0000004c webcontainer W com.ibm.ws.webcontainer.VirtualHostImpl addVhostEntry SRVE8100W: VirtualHost alias already exists
[5/17/17 18:35:11:604 MDT] 0000004c webcontainer W com.ibm.ws.webcontainer.VirtualHostImpl addVhostEntry SRVE8100W: VirtualHost alias already exists
[5/17/17 18:35:16:379 MDT] 0000004d FfdcProvider W com.ibm.ws.ffdc.impl.FfdcProvider logIncident FFDC1003: FFDC Incident emitted on C:\Users\
[5/17/17 18:40:26:405 MDT] 00000001 WSKeyStore W CWPKI0041W: One or more key stores are using the default password.
[5/17/17 18:40:27:423 MDT] 00000001 FfdcProvider W com.ibm.ws.ffdc.impl.FfdcProvider logIncident FFDC1003: FFDC Incident emitted on C:\Users\
[5/17/17 18:40:27:424 MDT] 00000001 ModuleManifes E UTLS0002E: The shared library psSharedLibrary contains a classpath entry which does not resolve to
[5/17/17 18:40:27:426 MDT] 00000001 ModuleManifes E UTLS0002E: The shared library psSharedLibrary contains a classpath entry which does not resolve to
[5/17/17 18:40:27:427 MDT] 00000001 ModuleManifes E UTLS0002E: The shared library psSharedLibrary contains a classpath entry which does not resolve to
[5/17/17 18:40:27:427 MDT] 00000001 ModuleManifes E UTLS0002E: The shared library psSharedLibrary contains a classpath entry which does not resolve to
[5/17/17 18:40:27:581 MDT] 00000001 FfdcProvider W com.ibm.ws.ffdc.impl.FfdcProvider logIncident FFDC1003: FFDC Incident emitted on C:\Users\
[5/17/17 18:40:32:792 MDT] 00000001 SibMessage W [ ] CWSJY0003W: MQJCA5001: WMQ messaging : '9.0.0.0-p900-L160509.1'.
[5/17/17 18:40:34:404 MDT] 0000004c AuthConfigFac W SECJ8032W: AuthConfigFactory implementation is not defined, using the default JASPI factory imple
[5/17/17 18:40:36:487 MDT] 0000004c webcontainer W com.ibm.ws.webcontainer.VirtualHostImpl addVhostEntry SRVE8100W: VirtualHost alias already exists
[5/17/17 18:40:36:489 MDT] 0000004c webcontainer W com.ibm.ws.webcontainer.VirtualHostImpl addVhostEntry SRVE8100W: VirtualHost alias already exists
[5/17/17 18:40:41:741 MDT] 0000004b FfdcProvider W com.ibm.ws.ffdc.impl.FfdcProvider logIncident FFDC1003: FFDC Incident emitted on C:\Users\w
[5/17/17 19:31:32:812 MDT] 000000a8 FfdcProvider W com.ibm.ws.ffdc.impl.FfdcProvider logIncident FFDC1003: FFDC Incident emitted on C:\Users\
[5/25/17 15:14:43:235 MDT] 00000001 WSKeyStore W CWPKI0041W: One or more key stores are using the default password.
[5/25/17 15:14:54:209 MDT] 00000001 FfdcProvider W com.ibm.ws.ffdc.impl.FfdcProvider logIncident FFDC1003: FFDC Incident emitted on C:\Users\w
[5/25/17 15:14:54:210 MDT] 00000001 ModuleManifes E UTLS0002E: The shared library psSharedLibrary contains a classpath entry which does not resolve to
[5/25/17 15:14:54:215 MDT] 00000001 ModuleManifes E UTLS0002E: The shared library psSharedLibrary contains a classpath entry which does not resolve to
[5/25/17 15:14:54:217 MDT] 00000001 ModuleManifes E UTLS0002E: The shared library psSharedLibrary contains a classpath entry which does not resolve to
[5/25/17 15:14:54:219 MDT] 00000001 ModuleManifes E UTLS0002E: The shared library psSharedLibrary contains a classpath entry which does not resolve to
[5/25/17 15:14:55:452 MDT] 00000001 FfdcProvider W com.ibm.ws.ffdc.impl.FfdcProvider logIncident FFDC1003: FFDC Incident emitted on C:\Users\
[5/25/17 15:15:12:355 MDT] 00000001 SibMessage W [ ] CWSJY0003W: MQJCA5001: WMQ messaging : '9.0.0.0-p900-L160509.1'.
[5/25/17 15:15:18:677 MDT] 0000004e AuthConfigFac W SECJ8032W: AuthConfigFactory implementation is not defined, using the default JASPI factory imple
[5/25/17 15:15:36:366 MDT] 0000004e webcontainer W com.ibm.ws.webcontainer.VirtualHostImpl addVhostEntry SRVE8100W: VirtualHost alias already exists
[5/25/17 15:15:36:368 MDT] 0000004e webcontainer W com.ibm.ws.webcontainer.VirtualHostImpl addVhostEntry SRVE8100W: VirtualHost alias already exists
[5/25/17 15:15:52:215 MDT] 0000004d FfdcProvider W com.ibm.ws.ffdc.impl.FfdcProvider logIncident FFDC1003: FFDC Incident emitted on C:\Users\
IVTL0040I: 42 errors/warnings are detected in the C:\Users\
ipsftpt8.56\webserver\peoplesoft\logs\server1\SystemOut.log file
IVTL0070I: The Installation Verification Tool verification succeeded.
IVTL0080I: The installation verification is complete.

```

First steps output - Installation verification window

## Starting and Stopping IBM WebSphere Application Servers on UNIX or Linux

To start WebSphere ND on UNIX or Linux, use the following command:

```
<PIA_HOME>/webserv/<profile_name>/bin/startServer.sh <server_name>
```

For example:

```
/home/pt856/webserver/peoplesoft/bin/startServer.sh server1
```

To stop WebSphere ND, use the following command:

```
<PIA_HOME>/webserv/<profile_name>/bin/stopServer.sh <server_name>
```


## Verifying the IBM WebSphere Installation

Use this method to verify the WebSphere ND and PIA installation for both Microsoft Windows and UNIX.

To verify the WebSphere ND and PIA installation, copy the following URL into a browser address bar, substituting your machine name and the http port number:

```
http://<machine_name>:<http_port>/ivt/ivtservlet
```

You should see the text "IVT Servlet" in the browser, as in this example:

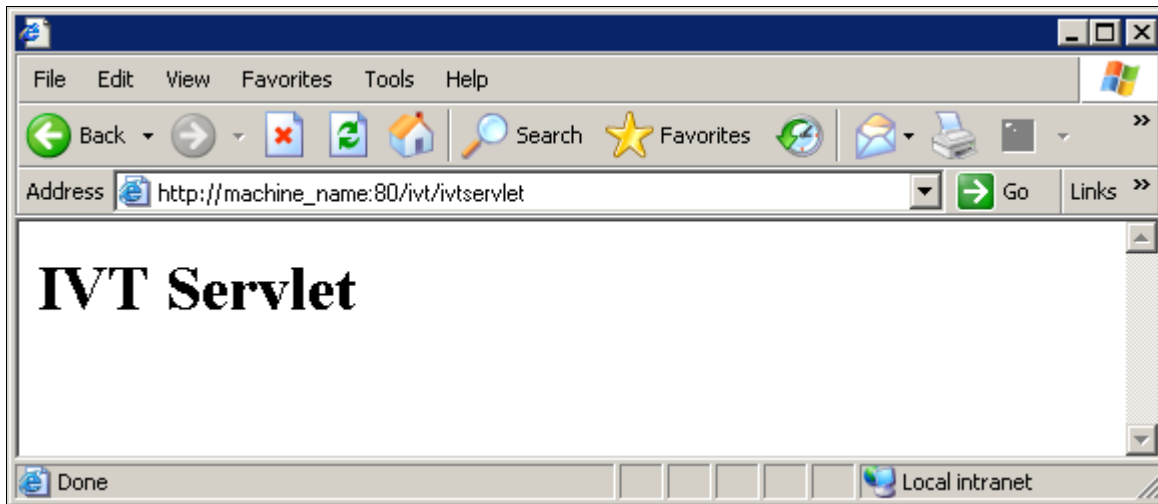

IVT Servlet window

You should also sign into the PeopleSoft application, as described in a later section, to verify the installation. See *Accessing the PeopleSoft Signon*.

### Task 9A-5-3: Using PSADMIN to Start and Stop Web Servers

In addition to the methods given in the previous sections for starting and stopping Oracle WebLogic and IBM WebSphere web servers, in PeopleSoft PeopleTools 8.52 and later releases you can use PSADMIN to administer a web server domain.

See *PeopleTools: System and Server Administration*.

To start and stop web servers:

1. Go to the *PS\_HOME*/appserv directory and run the command `psadmin`.
2. Specify 4 for Web (PIA) Server.

```
-----
PeopleSoft Server Administration
-----
```

```
PS_HOME:      : C:\pt856
PS_CFG_HOME:  C:\psft_AppServ
```

- ```

1) Application Server
2) Process Scheduler
3) Search Server
4) Web (PIA) Server
5) Switch Config Home
6) Service Setup
7) Replicate Config Home
q) Quit
```

```
Command to execute (1-7, q): 4
```

The location of Config Home is the current working directory. The PSADMIN utility determines the Config

Home directory by checking for the `PS_CFG_HOME` environment variable. If that is not set, it checks for the presence of domains in the default `PS_CFG_HOME` location. If none exists, it uses the `PS_HOME` location from which it was launched.

See "Preparing for Installation," Defining Installation Locations.

3. Select *1* for Administer a domain.

```
-----
PeopleSoft PIA Administration
-----
```

```
PIA Home:    C:\psft_WebServ
```

- 1) Administer a domain
- 2) Create a domain
- 3) Delete a domain

```
q) Quit
```

Command to execute: **1**

The PSADMIN utility determines the PIA Home location displayed here by first checking for a `PIA_HOME` environment variable. If none is set, it checks for the `PS_CFG_HOME` environment variable. If neither is set, it uses the default `PS_CFG_HOME` directory.

4. Select the domain you want to administer by entering the appropriate number.

```
-----
PeopleSoft PIA Domain Administration - Choose a Domain
-----
```

- 1) psftTST
- 2) peoplesoft

```
q) Quit
```

Command to execute: **2**

5. To start a web server domain, enter *1*, Boot this domain.

```
-----
PeopleSoft PIA Domain Administration
-----
```

```
PIA Home:    C:\psft_WebServ
PIA Domain:  peoplesoft
Domain Status: stopped
```

- 1) Boot this domain
- 2) Shutdown this domain
- 3) Get the status of this domain
- 4) Configure this domain
- 5) Edit configuration files
- 6) View log files
- 7) Administer a site
- 8) Delete a site
- 9) Windows Service Setup

q) Quit

Command to execute: **1**

The boot command invokes the startPIA.cmd script, and you see the progress and a status message on the console window.

```
Starting the domain.....
...
Verifying domain status..
The domain has started.
```

6. To stop a web server domain, select 2, Shutdown this domain.

The shutdown command invokes the stopPIA.cmd script, and you see the progress and a status message on the console window.

```
Stopping the domain.....
.....
Verifying domain status.....
The domain has stopped.
```

7. To set up a Windows service, select 9, Windows Service Setup.

8. Select 1 to install a service, or 2 to remove it.

This command invokes the installNTservice script, and creates a service named *WebLogicDomain-WebLogicServer*.

```
-----
Windows Service Setup
-----

PIA Home:      C:\psft_websrv
PIA Domain:    peoplesoft
Domain status: started

1) Install Service
2) Uninstall Service

q) Quit
```

Command to execute:

## Task 9A-5-4: Accessing the PeopleSoft Signon

To access the PeopleSoft signon:

1. Open your web browser.



2. Enter the name of the site you want to access—for example (the default value for `<site_name>` is `ps`):


```
http://<machine_name>:<http_port>/<site_name>/signon.html
```

---

**Note.** PeopleSoft Pure Internet Architecture installed on IBM WebSphere server listens at the HTTP/HTTPS ports specified during the PeopleSoft Pure Internet Architecture install. Invoke PeopleSoft Pure Internet Architecture through a browser by using the specified HTTP or HTTPS ports—that is, `http://<WebSphere_machine_name>:<server_port>/<site_name>/signon.html` (if `AuthTokenDomain` is not specified) or `http://<WebSphere_machine_name.mycompany.com>:<server_port>/<site_name>/signon.html` (if you specified `.mycompany.com` as the `AuthTokenDomain`). You can find the HTTP and HTTPS ports in the file `<PIA_HOME>/webserv/<domain_name>/logs/AboutThisProfile.txt`.

---

This will take you to the sign-in window corresponding to your browser's language preference, as shown in this example:

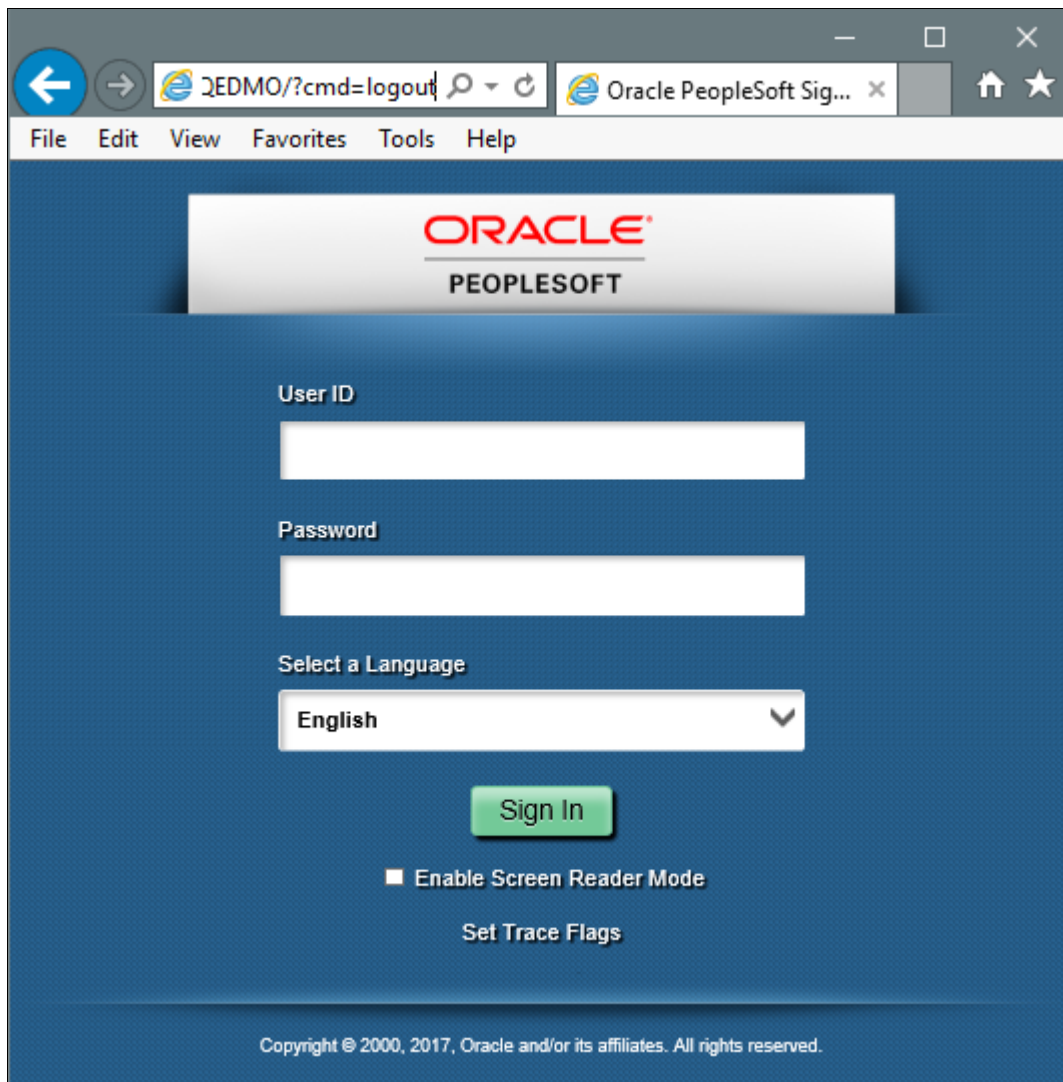

Oracle PeopleSoft Enterprise Sign in window

---

**Note.** If you do not see the signon screen, check that you supplied all the correct variables and that your application server and the database server are running.

---

3. Sign in to the PeopleSoft system by entering a valid user ID and password.

The user ID and password are case sensitive.

---

**Note.** The user ID and password were set during the database configuration and also used to boot the application server.

---

The PeopleSoft PeopleTools and PeopleSoft applications include various default user IDs. For information on using the user IDs delivered with your PeopleSoft application demo database, see the application-specific installation instructions. For information on using and securing PeopleSoft PeopleTools default user IDs, see the information on administering user profiles in the *PeopleTools: Security Administration* product documentation.

## **Task 9A-6: Completing Post-Installation Steps**

---

This section discusses:

- Using Fluid User Interface
- Setting Options for Multilingual Databases
- Updating PeopleTools Options
- Updating Time Zone Information
- Updating Database Information

### **Task 9A-6-1: Using Fluid User Interface**

When you sign in to your PeopleSoft application, you may see the PeopleSoft Fluid User Interface by default. To access the menu items, as seen in the classic user interface, from the PeopleSoft Fluid User Interface:


1. On the PeopleSoft Fluid User Interface, shown in this example, select (press) the NavBar button at the top right (diamond inside a circle).



PeopleSoft Fluid User Interface home page

The Navigation bar (NavBar) side page appears.


2. Select (press) Navigator.

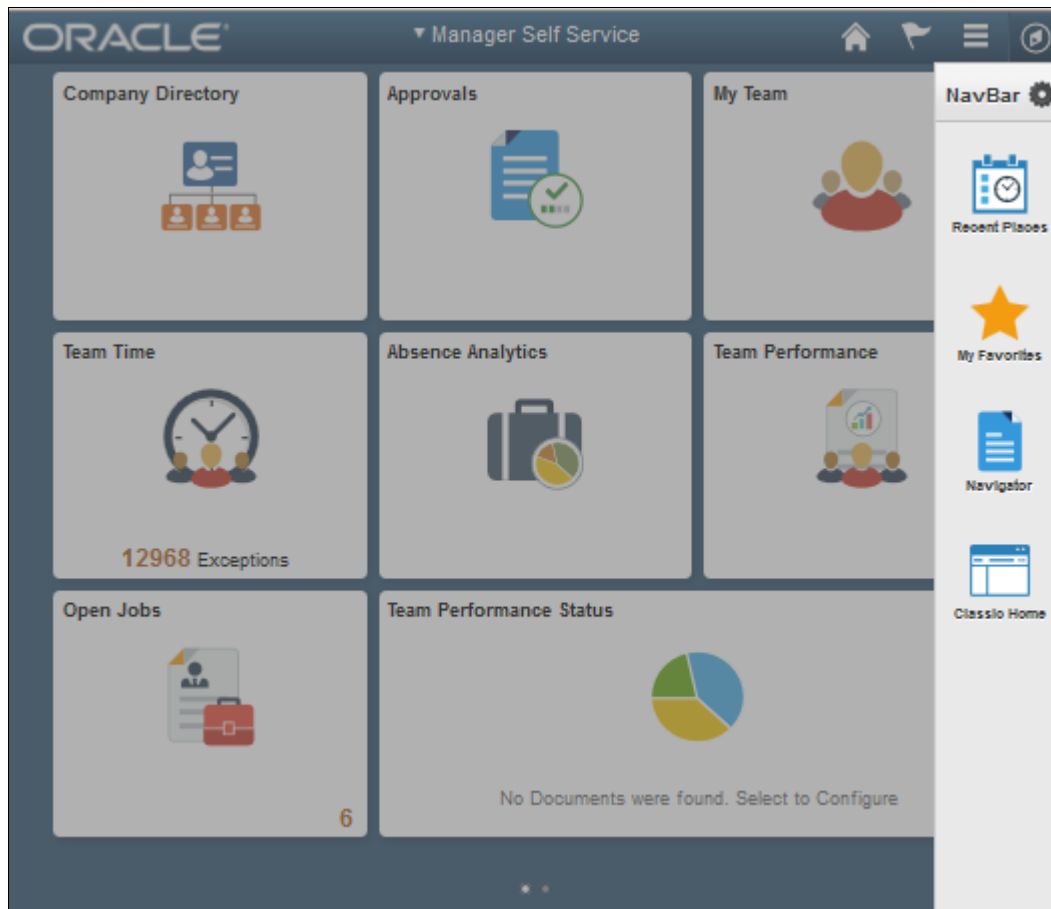

NavBar side page

The menu structure appears.

3. Navigate to the desired item, such as Set Up HCM or PeopleTools.

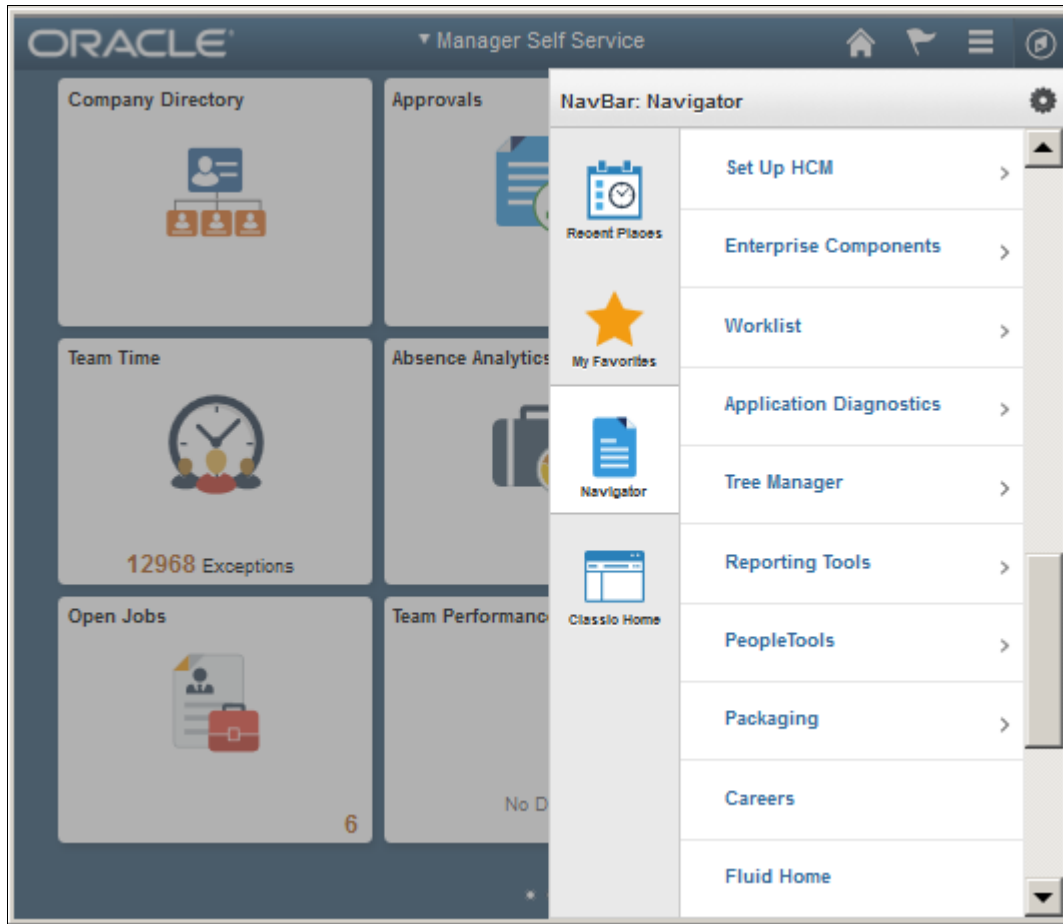

Navigator side page with PeopleSoft menu items

## See Also

*PeopleTools: Applications User's Guide*, "Working With Fluid Homepages"

*PeopleTools: Fluid User Interface Developer's Guide*

## Task 9A-6-2: Setting Options for Multilingual Databases

### Setting the Data Field Length Checking Option

The value to specify data field length checking must be set correctly in order for PeopleSoft applications to perform correctly in a browser. Use one of these methods to set the data field length checking option:

- Select PeopleTools, Utilities, Administration, PeopleTools Options, and select the Data Field Length Checking option from the drop-down list.
- Alternatively, use the SQL tool for your database platform to modify the DBLENGTHTYPE parameter in the PSOPTIONS table.

See *PeopleTools: Global Technology*, "Setting Data Field Length Checking."

See *PeopleTools: Global Technology*, "Selecting Character Sets."

Use the guidelines in this table to select the correct option for your environment:

Environment	PeopleTools Option Page Selection	PSOPTIONS.DBLENGHTHTYPE Value
Unicode-encoded database or a non-Unicode SBCS database	Others	N
Japanese database on DB2 LUW	DB2 MBCS	D
Non-Unicode Japanese database <b>Note.</b> If your installation uses the Shift-JIS character set for Japanese, you must use this option.	MBCS <b>Note.</b> The MBCS option is not supported for DB2 z/OS.	M

### Setting the Unicode Enabled Option

If you are running a Unicode database, verify that the UNICODE\_ENABLED parameter in the PSSTATUS table is set correctly. For example:

- For non-Unicode databases, including those using the Shift-JIS character set for Japanese, set UNICODE\_ENABLED=0.
- For Unicode databases, set UNICODE\_ENABLED=1.

See the information on converting to Unicode in the *PeopleTools: Global Technology* product documentation.

### Task 9A-6-3: Updating PeopleTools Options

You can set the following options on the PeopleTools Options page:

- Multi-Currency — Select this check box if you plan to use currency conversion.  
See *PeopleTools: Global Technology*, "Using System-Wide Multicurrency Settings."
- Base Time Zone — Enter a value for the base time zone for your PeopleTools database.  
See *PeopleTools: Global Technology*, "Setting the Base Time Zone."
- Sort Order Option — If you specified a non-binary sort order for your database, choose the Sort Order Option that most closely approximates your database sort order.  
See *PeopleTools: Global Technology*, "Setting the Sort Order."

### Task 9A-6-4: Updating Time Zone Information

Additional steps may be required to configure your time zone after you complete the installation.

See *PeopleTools: Global Technology*, "Maintaining Time Zones."

## Task 9A-6-5: Updating Database Information

The database information updated in this procedure is used by the PeopleSoft software update tools to identify your PeopleSoft database when searching for updates. These steps should be followed for all additional databases that you create to enable the accurate identification of your databases.

1. Sign on to your PeopleSoft database.
2. Navigate to PeopleTools, Utilities, Administration, PeopleTools Options.
3. Specify long and short names for your environment. For example:
  - Environment Long Name — Customer HR Demo Database
  - Environment Short Name — HR Demo DB
4. Select a system type from the drop-down list. For example, Demo Database.
5. Save your changes.





## Chapter 9B

# Setting Up the PeopleSoft Pure Internet Architecture in Console Mode

This chapter discusses:

- Understanding PeopleSoft Pure Internet Architecture
- Using Authentication Domains in the PeopleSoft Pure Internet Architecture Installation
- Preparing the PeopleSoft Pure Internet Architecture File System for a PeopleTools-Only Upgrade
- Installing the PeopleSoft Pure Internet Architecture on Oracle WebLogic in Console Mode
- Installing the PeopleSoft Pure Internet Architecture on IBM WebSphere in Console Mode
- Installing the PeopleSoft Pure Internet Architecture in Silent Mode
- Configuring the SSL/TLS Port for JSL
- Testing and Administering the PeopleSoft Pure Internet Architecture Installation
- Completing Post-Installation Steps

## Understanding PeopleSoft Pure Internet Architecture

---

This chapter explains how to install and configure the components of the PeopleSoft Pure Internet Architecture in console mode and in silent mode. It includes instructions for installing the PeopleSoft files on Oracle WebLogic and IBM WebSphere. Only complete the instructions for the web server product that you installed.

---

**Note.** The console mode installation is typically used on UNIX platforms.

---

See "Installing Web Server Products."

The setup program for the PeopleSoft Pure Internet Architecture is installed to the web server machine when you run the PeopleSoft Installer and select the PeopleSoft Web Server option.

See "Using the PeopleSoft Installer."

Oracle only supports customer installations that use web servers that are certified for PeopleSoft PeopleTools. *You must install the web server before you install the PeopleSoft Pure Internet Architecture.* Before you install the PeopleSoft Pure Internet Architecture, you must also have configured an application server, as described in the previous chapter.

The location where you install the PeopleSoft Pure Internet Architecture is referred to in this documentation as *PIA\_HOME*. You can specify different locations for *PS\_HOME* and *PIA\_HOME*. After you complete the PeopleSoft Pure Internet Architecture installation, you can locate the installation files in the directory *PIA\_HOME/webserv*.

For PeopleSoft PeopleTools 8.51 and later, if you are setting up the PeopleSoft Pure Internet Architecture on a Microsoft Windows platform, the directory and path that you specify for *PIA\_HOME* may include spaces. However, parentheses in the directory name (for example, "C:\Program Files (x86)") are *not* allowed for *PIA\_HOME*.

See "Preparing for Installation," Defining Installation Locations.

Before performing the steps in this chapter, verify that Sun's international version of JRE version 7 or higher is properly installed on the system and its path is in the system's environment variable PATH.

If your web server is on a different machine than your application server, you need to make sure you have JRE installed on your web server to run the PeopleSoft Pure Internet Architecture installation.

---

**Note.** If you encounter the error message "No Matching JVM," you need to specify the absolute path to the Java Runtime Environment (JRE) executable (including the executable file name) using the `-javahome` command line parameter; for example: `<PS_HOME>/setup/PsMpPIAInstall/setup.sh -tempdir <temporary_directory> -javahome <jredir>/bin/java`.

---

The initial PeopleSoft Pure Internet Architecture setup automatically creates the default PeopleSoft site named *ps*. In subsequent PeopleSoft Pure Internet Architecture setups, change the site name from *ps* to a unique value. We recommend using the database name. This is handy for easy identification and ensures that the database web server files are installed in a unique web site.

The URL that you use to invoke the PeopleSoft Pure Internet Architecture must conform to ASN.1 specifications. That is, it may contain only alphanumeric characters, dots ("."), or dashes ("-"). The URL must not begin or end with a dot or dash, or contain consecutive dots (".."). If the URL includes more than one portion, separated by dots, do not use a number to begin a segment if the other segments contain letters. For example, "mycompany.second.country.com" is correct, but "mycompany.2nd.country.com" is wrong.

Review the following additional notes before beginning the PeopleSoft Pure Internet Architecture installation:

- If you want to connect between multiple application databases, you need to implement single signon.
- If the PeopleSoft Pure Internet Architecture installation encounters an error, it will indicate which log files to refer to.

See "Installing Web Server Products."

- The machine on which you run the PeopleSoft Pure Internet Architecture install must be running in *256 color mode*. This is not necessary for UNIX or console mode.

The PeopleSoft Pure Internet Architecture installation includes the following products:

- *PeopleSoft Pure Internet Architecture*. This product is the centerpiece of the PeopleSoft architecture that enables users to work on a machine with only a supported browser installed. This option installs the servlets required for deploying PeopleSoft Applications and for the PeopleSoft portal. The portal packs and PeopleSoft Portal Solutions have their own installation instructions, which are available on My Oracle Support. For an overview of the various types of portals, consult the *PeopleTools: Portal Technology* product documentation.
- *PeopleSoft Report Repository*. This product works in conjunction with Process Scheduler to allow report distribution over the web.
- *PeopleSoft Integration Gateway*. This product is the entry and exit point for all messages to and from the Integration Broker. Its Java-based Connector architecture allows asynchronous and synchronous messages to be sent over a variety of standard protocols, many that are delivered at install, or through custom connectors.

---

**Important!** For PeopleSoft PeopleTools 8.50 and later, review the product documentation concerning security properties for Integration Gateway. When setting the properties in the `integrationGateways.properties` file, the property `secureFileKeystorePasswd` must be encrypted, and the `secureFileKeystorePath` must be set.

---

See *PeopleTools: Integration Broker Administration*.

- *PeopleSoft CTI Console.* This product works in conjunction with CTI vendor software to enable call center agents to take advantage of browser-based teleset management and automatic population of application pages with relevant data associated with incoming calls, such as customer or case details.

See *PeopleTools: MultiChannel Framework*.

- *Environment Management Hub.* The Environment Management hub is a web application that is installed with the PeopleSoft Pure Internet Architecture and portal. It is started along with the rest of the web applications when the user boots the web server. You cannot start the Environment Management Hub on a server that is configured to run HTTPS; in other words, if you plan to run Environment Management, your PIA server needs to be configured in HTTP mode.

See *PeopleTools: Change Assistant and Update Manager*.

## See Also

*PeopleTools: Security Administration*

*PeopleTools: System and Server Administration*

## Using Authentication Domains in the PeopleSoft Pure Internet Architecture Installation

---

You have the option to specify an authentication domain when you install the PeopleSoft Pure Internet Architecture on Oracle WebLogic or IBM WebSphere.

---

**Note.** The authentication domain was referred to as the Authentication Token Domain in previous releases, and that term is still seen in the software.

---

When an authentication domain is specified during the PeopleSoft Pure Internet Architecture installation, that value gets used as the Cookie domain in the web server configuration. The main requirements when setting a cookie domain are:

- The host must have a fully qualified domain name (FQDN). The requirement that you must have a domain name does not imply that you must have a DNS, but you do need some type of naming service such as DNS or some managed `./etc/hosts` file that contains a list of the servers with their domain name.
- The cookie domain value being set must begin with a dot (`.ps.com` is valid, `ps.com` is NOT valid).
- The cookie domain value being set must contain at least 1 embedded dot (`.ps.com` is valid, `.corp.ps.com` is valid, `.com` is NOT valid).
- The cookie domain value can only be a single domain name. It cannot be a delimiter-separated list of domains.

By default, the browser only sends cookies back to the machine that set the cookie. So if web server `crm.yourdomain.com` sets a cookie, the browser will only send it back there. You can make the browser send the single signon cookie to all servers at `yourdomain.com` by typing your domain name in the Authentication Token Domain list box of web server `crm`.

Specifying the authentication domain may be necessary in certain cases. For example, if you plan to use the PeopleSoft portal technology, be sure to read the supporting documentation on configuring the portal environment, to determine whether setting the authentication domain is required for correct operation.

See *PeopleTools: Portal Technology*.

Specify an authentication domain if you plan to run a REN Server. REN Servers are required for PeopleSoft MultiChannel Framework, Reporting, and some PeopleSoft CRM applications supported by PeopleSoft MultiChannel Framework.

See *PeopleTools: MultiChannel Framework*.

If you use the PeopleSoft Mobile Application Platform (MAP), you must specify the same authentication domain during the PeopleSoft Pure Internet Architecture installation, for MAP, and for Integration Broker and integration hubs.

See *PeopleTools: Mobile Application Platform*.

See *PeopleTools: Integration Broker*.

## **Task 9B-1: Preparing the PeopleSoft Pure Internet Architecture File System for a PeopleTools-Only Upgrade**

---

When performing the installation of the PeopleSoft Pure Internet Architecture system using the separate upgrade *PS\_HOME* (which is different than your old release *PS\_HOME*), you may install and configure your PeopleSoft Pure Internet Architecture system at this point in time of the installation, but do not start your PeopleSoft Pure Internet Architecture system until directed to do so within the upgrade.

If you are installing into an existing *PS\_HOME* or *PIA\_HOME* after completing a PeopleTools-only upgrade, perform the following instructions to remove any obsolete files.

See "Preparing for Installation," Preparing for the PeopleTools-Only Upgrade.

Stop the web server before performing the PeopleSoft Pure Internet Architecture installation or uninstallation.

Depending on your web server platform, complete the following steps to clean up previous PeopleSoft Pure Internet Architecture sites:

- Oracle WebLogic

Shut down Oracle WebLogic and follow the uninstallation instructions in the old release PeopleSoft PeopleTools installation guide for your database platform. Alternatively, delete the contents of one of the following directories:

- For PeopleSoft PeopleTools 8.43.x or earlier: `<weblogic_home>\wlserver6.1\config\<domain_name>|*`
- For PeopleSoft PeopleTools 8.44.x to 8.49.x: `<PS_HOME>\webserv\<domain_name>|*`
- For PeopleSoft PeopleTools 8.50.x or later: `<PIA_HOME>\webserv\<domain_name>|*`

- IBM WebSphere

Shut down IBM WebSphere and follow the uninstallation instructions in the old release PeopleSoft PeopleTools installation guide for your database platform.

## **Task 9B-2: Installing the PeopleSoft Pure Internet Architecture on Oracle WebLogic in Console Mode**

---

This section discusses:

- Prerequisites
- Installing the PeopleSoft Pure Internet Architecture on a New Oracle WebLogic Domain in Console Mode

- Installing the PeopleSoft Pure Internet Architecture on an Existing Oracle WebLogic Domain in Console Mode
- Uninstalling the PeopleSoft Pure Internet Architecture from Oracle WebLogic

## Task 9B-2-1: Prerequisites

This section describes how to install the PeopleSoft Pure Internet Architecture on Oracle WebLogic. Before you install the PeopleSoft Pure Internet Architecture (PIA) on Oracle WebLogic, you must have installed the Oracle WebLogic software. PeopleSoft PeopleTools 8.56 supports Java 8 enabled 64-bit Oracle WebLogic 12.2.1.0.

See "Installing Web Server Products," Installing Oracle WebLogic Server.

See the information on working with Oracle WebLogic in the *PeopleTools: System and Server Administration* product documentation.

## Task 9B-2-2: Installing the PeopleSoft Pure Internet Architecture on a New Oracle WebLogic Domain in Console Mode

To install the PeopleSoft Pure Internet Architecture on Oracle WebLogic:

1. Change directory to `PS_HOME/setup/PsMpPIAInstall` and run one of these commands:

```
setup.sh -tempdir <temporary_directory>
```

See "Using the PeopleSoft Installer," Running the PeopleSoft Installer, for setup command options.

See "Using the PeopleSoft Installer," Prerequisites.

A welcome message appears.

2. Press ENTER at the Welcome prompt to continue.

```
Welcome to the InstallShield Wizard for PeopleSoft Internet=>
Architecture.
```

```
Using the InstallShield Wizard you will install PeopleSoft Internet=>
Architecture on your computer.
```

```
Version: 8.56
```

```
Note: If installing onto an Oracle WebLogic Server, make sure to=>
shutdown any running=>
webservers to avoid web server configuration.
```

```
Press 1 for Next, 3 to Cancel, or 5 to Redisplay [1]:
```

3. Enter the directory where you want to install the PeopleSoft Pure Internet Architecture, referred to here as *PIA\_HOME*.

```
Choose the directory where you wish to deploy the PeopleSoft Pure=>
Internet Architecture:
```

```
Please specify a directory name or press Enter
[/home/PT856]:
```

4. Enter *1* to select the Oracle WebLogic Server.

```
Choose the installation type that best suits your needs
```

```
->1- Oracle WebLogic Server
    2- IBM WebSphere Server
```

To select an item enter its number, or 0 when you are finished [0]:

5. Enter the top-level directory where Oracle WebLogic is installed.

Select the web server root directory [/opt/oracle]: /data4/WLS\_HOME

Detected web server version: WebLogic 12.2.1

---

**Note.** You will get an error message if you specify a directory that does not contain Oracle WebLogic, or that contains an incorrect Oracle WebLogic version.

---

6. Select 1, Create New WebLogic Domain, at the following prompt:

```
->1- Create New WebLogic Domain
    2- Existing WebLogic Domain
```

---

**Note.** If the PIA installer cannot detect any existing Oracle WebLogic domains, only the option Create New WebLogic Domain is available. The installation on an existing domain is described in the following section.

See Installing the PeopleSoft Pure Internet Architecture on an Existing Oracle WebLogic Domain in Console Mode.

---

7. The installation process automatically generates a valid domain name, which is peoplesoft in the following sample prompt.

If you attempt to enter an invalid domain name, you see a prompt asking you to enter a new domain name or choose an existing domain.

Enter domain name or click Next to select default [peoplesoft]:

8. Enter the administrator login, or accept the default value. Enter and re-enter the password for your Oracle WebLogic domain.

Press ENTER to continue.

The default login ID is system. The password must be at least 8 alphanumeric characters with at least one number or special character.

Please enter the administrator login and password for WebLogic domain.

Login ID [system]:

Password []:

Re-type Password []:

9. Select the type of domain to create—single server, multi server, or distributed managed server.

Please select the configuration to install.

```
->1- Single Server Domain
    2- Multi Server Domain
    3- Distributed Managed Server
```

There are three domain configuration options:

- *Single Server Domain*

This domain configuration contains one server, named PeopleSoft Pure Internet Architecture and the entire PeopleSoft application is deployed to it. This configuration is intended for single user or very small scale, non-production environments. This configuration is very similar to the Oracle WebLogic domain provided in PeopleSoft PeopleTools 8.40 through 8.44.

- *Multi Server Domain*

This domain configuration is contains seven unique server definitions, a Oracle WebLogic cluster, and the PeopleSoft Application split across multiple servers. This configuration is the intended for a production environment.

- *Distributed Managed Server*

This option is an extension of the Multi Server Domain selection and installs the necessary files to boot a managed server. This option requires a Multi Server installation to be performed to some other location, which will contain the configuration for this managed server.

10. Enter the Integration Gateway User and password.

The password must be at least 8 alphanumeric characters.

See *PeopleTools: Integration Broker Administration*.

Please enter the Integration Gateway User and Password.

```
Integration Gateway User [administrator]:
Password []:
Re-type Password []:
```

Press 1 for Next, 2 for Previous, 3 to Cancel or 5 to Redisplay [1] :

11. Enter the AppServer Domain Connection password (optional).

If you configured your Application Server domain to require a Domain Connection password, enter it here. Otherwise, leave it blank. This password will be propagated to the Integration Gateway.

See the information on setting Application Server domain parameters in the *PeopleTools: System and Server Administration* product documentation.

Please enter the AppServer Domain Connection Password.

```
Password []:
Re-type Password []:
```

Press 1 for Next, 2 for Previous, 3 to Cancel or 5 to Redisplay [1] :

12. Enter a PeopleSoft web site name; the default is ps.

---

**Warning!** The site name can include underscores ( \_ ), but an underscore cannot be followed by a numeric character or the string "newwin" (for example, my\_site\_3 or my\_newwin\_site).

---

Please specify a name for the PeopleSoft web site:  
Website name [ps]:

13. Specify your application server name, its JSL (Jolt Station Listener) port number, its HTTP and HTTPS port numbers, the Authentication Token Domain (optional).

Enter port numbers and summaries.

```
AppServer name [APPSRVNAME]:
```

```
JSL Port [9000]:
```

```
HTTP Port [80]:
```

HTTPS Port [443]:

Authentication Token Domain (optional) []:

- *AppServer name*

For the AppServer name setting, enter the name of your application server.

See "Configuring the Application Server on UNIX."

See "Configuring the Application Server on Windows."

See Understanding the PeopleSoft Pure Internet Architecture.

- *JSL Port*

For the JSL port setting, enter the JSL port number you specified when setting up your application server. (The default value is 9000.)

- *HTTP and HTTPS Port*

The values for the HTTP and HTTPS ports should be greater than 1024. Any port number less than 1024 is reserved and only Root has access to it.

- *Authentication Token Domain*

The value you enter for the Authentication Token Domain must match the value you specify when configuring your application server, as described earlier in this book. In addition, certain installation configurations require that you specify an authentication domain.

See Using Authentication Domains in the PeopleSoft Pure Internet Architecture Installation.

If you enter a value for the Authentication Token Domain, the URL to invoke PeopleSoft Pure Internet Architecture must include the network domain name in the URL. For example, if you do not enter an authentication domain, the URL to invoke PeopleSoft Pure Internet Architecture is `http://MachineName/ps/signon.html`. If you do enter a value for authentication domain (for example, `.myCompany.com`), the URL to invoke PeopleSoft Pure Internet Architecture is `http://MachineName.myCompany.com/ps/signon.html`. In addition, if the web server for the database is using an http port other than the default port of 80, the URL must include the port number, for example `http://MachineName:8080/ps/signon.html` if there is no authentication domain, or `http://MachineName.myCompany.com:8080/ps/signon.html` if there is an authentication domain. The URL must also comply with the naming rules given earlier in this chapter.

#### 14. Enter the details for the web profile, PROD, or enter another name.

The example below shows the default web profile name, PROD, and default user ID, PTWEBSERVER. The web profile name will be used to configure this web site. You can specify one of the other predelivered web profiles, DEV, TEST, or KIOSK, or enter a different name. If you intend to use a Web Profile User ID other than the default, be sure to review the information on web profile configuration and security in the *PeopleTools: Portal Technology* product documentation.

```
Please enter the Name of the Web Profile used to configure the web=>
server. The user id and password will be used to retrieve the web=>
profile from the database. (NOTE: Other available preset web profile=>
names are "TEST", "DEV", and "KIOSK".)
```

Web Profile Name [PROD]:

User ID [PTWEBSERVER]:

Password []:

Re-type Password []:



---

**Note.** If the PeopleSoft PeopleTools version of your database is *below* 8.44, then you will need to add the PTWEBSERVER User Profile before you upgrade to the current PeopleSoft PeopleTools release. The User Profile must include the PeopleTools Web Server role, but do not grant any other roles. Enter the password that you set for the User Profile for the User ID password in this step, as shown in this example. The password must be at least 8 alphanumeric characters.

See the *PeopleTools: Security Administration* product documentation for the steps required to add a User Profile.

---

15. Specify the root directory for the Report Repository.

The default directory is `<user_home>/PeopleSoft Internet Architecture/psreports`, where `<user_home>` is the home directory for the current user.

You must have write access to the specified directory.

---

**Note.** In setting up the Process Scheduler to transfer reports, if you choose the FTP protocol, use the same directory for the Home Directory as you use here for the report repository.

---

See "Setting Up Process Scheduler," Setting Up Process Scheduler to Transfer Reports and Logs to the Report Repository.

Select the Report Repository location:

Please specify a directory name or press Enter `[/ds1/home/PeopleSoft→  
Internet Architecture/psreports]`:

16. Verify all of your selections and press Enter to begin the installation.

Setup Type : weblogic

Web server root directory : /data4/WLS1213

Web server version : 12.1

Web server domain : peoplesoft

Internet Architecture app name : PORTAL

Integration Gateway app name : PSIGW

PeopleSoft Business Interlink app name : PSINTERLINKS

Environment Management Hub : PSEMHUB

Portlet Container app name : pspc

Site name : ps

Authentication Token Domain :

Application server name : APPSRVNAME

JSL port : 9000

Report repository directory : /ds1/home/PeopleSoft Internet→

```
Architecture/psreports
```

```
PIA webserver directory : /home/psftuser/psft/pt/8.56/webserv
```

You see a progress indicator showing the progress of your installation.

17. When the installation is complete, exit from the console window.

The default installation directory is for the PIA domain `<PIA_HOME>/webserv/<domain_name>/`, where `<domain>` is the web server domain (peoplesoft by default).

## Task 9B-2-3: Installing the PeopleSoft Pure Internet Architecture on an Existing Oracle WebLogic Domain in Console Mode

To install the PeopleSoft Pure Internet Architecture on Oracle WebLogic:

1. Change directory to `PS_HOME/setup/PsMpPIAInstall` and run one of these commands:

```
setup.sh -tempdir <temporary_directory>
```

See "Using the PeopleSoft Installer," Running the PeopleSoft Installer, for setup command options.

See "Using the PeopleSoft Installer," Prerequisites.

A welcome message appears.

2. Press ENTER at the Welcome prompt to continue.

```
Welcome to the InstallShield Wizard for PeopleSoft Internet⇒
Architecture.
```

```
Using the InstallShield Wizard you will install PeopleSoft Internet⇒
Architecture on your computer.
```

```
Version: 8.56
```

```
If installing onto an Oracle WebLogic Server, make sure to shutdown any⇒
running⇒
```

```
webserver to avoid web server configuration.
```

```
Press 1 for Next, 3 to Cancel, or 5 to Redisplay [1]:
```

3. Enter the directory where you want to install the PeopleSoft Pure Internet Architecture, referred to here as `PIA_HOME`.

```
Choose the directory where you wish to deploy the PeopleSoft Pure⇒
Internet Architecture:
```

```
Please specify a directory name or press Enter
[/home/PT856]:
```

4. Enter `1` to select the Oracle WebLogic Server.

```
Choose the installation type that best suits your needs
```

```
->1- Oracle WebLogic Server
```

```
2- IBM WebSphere Server
```

```
To select an item enter its number, or 0 when you are finished [0]:
```

5. Enter the top-level directory where Oracle WebLogic is installed.

```
Select the web server root directory [/opt/oracle]: /data4/WLS_HOME
```

Detected web server version: WebLogic 12.2.1

---

**Note.** You will get an error message if you specify a directory that does not contain Oracle WebLogic, or that contains an incorrect Oracle WebLogic version.

---

6. Select 2, Existing WebLogic Domain, at the following prompt:

---

**Note.** You only see the option Existing WebLogic Domain if there is already a domain in *PIA\_HOME*.

---

```
1- Create New WebLogic Domain
->2- Existing WebLogic Domain
```

7. Select the domain name from the list:

```
Select application name from list:
->1- ptwls
    2- ptwls2
```

8. Select one of these options for operations to run at the following prompt:

```
Select application name from list:

->1- Install additional PeopleSoft site
    2- Redeploy PeopleSoft Internet Architecture
    3- Re-create WebLogic domain and redeploy PeopleSoft Internet
Architecture
    4- Deploy additional PeopleSoft application extensions
```

To select an item enter its number, or 0 when you are finished [0] : 1

- *Install additional PeopleSoft site*

This option is relevant only to the PeopleSoft PORTAL web application, and does not modify or revert any other configuration settings. Select this option to install only the necessary files for defining an additional PeopleSoft site onto an existing Oracle WebLogic configuration. The new site will be accessed using its name in the URL. A site named "CRM" would be accessed using a URL similar to `http://<mywebserver_machine>/CRM`. To reset or re-create an existing PeopleSoft site, simply enter that site's name as the site to create. On your web server, a PeopleSoft site is comprised of the following directories within the PORTAL web application:

```
<WEBLOGIC_DOMAIN>/applications/peoplesoft/PORTAL/<site>/*
```

```
<WEBLOGIC_DOMAIN>/applications/peoplesoft/PORTAL/WEB-INF/psftdocs/<site>/*
```

- *Redeploy PeopleSoft Internet Architecture*

This option affects all of the PeopleSoft Pure Internet Architecture web applications installed to the local Oracle WebLogic domain. Select this option to redeploy all of the web components of the PeopleSoft Pure Internet Architecture. The redeployment process updates all of the web components of the PeopleSoft Pure Internet Architecture, without modifying the configuration files or scripts that belong to the Oracle WebLogic server domain.

- *Re-create WebLogic domain and redeploy PeopleSoft Internet Architecture*

This option affects Oracle WebLogic Server domain configuration and all of the PeopleSoft Pure Internet Architecture web applications installed to the local Oracle WebLogic domain. Select this option to completely remove an existing Oracle WebLogic domain and deploy the PeopleSoft Pure Internet Architecture components to create the newly specified PeopleSoft site.

---

**Warning!** Re-creating an existing domain will delete everything previously installed into that domain.

---

See *PeopleTools: Portal Technology*.

- *Deploy additional PeopleSoft application extensions*

This option is solely for use with PeopleSoft applications. PeopleSoft application extensions are provided with certain PeopleSoft applications, and this option allows you to deploy those extensions. Consult the installation documentation for your PeopleSoft application to see if this option is appropriate. PeopleSoft PeopleTools does not use application extensions.

9. If there are application packages in the archives directory, select whether you want to deploy them. (If you are using an existing domain, you see a prompt for this only if you elected to Deploy Additional PeopleSoft Extensions.)
10. Enter the administrator login and password that you specified for the existing Oracle WebLogic domain. Press ENTER to continue.

The default login ID is system. The password must be at least 8 alphanumeric characters with at least one number or special character.

Please enter the administrator login and password for WebLogic domain.

Login ID [system]:

Password []:

11. Select the type of domain to create—single server, multi server, or distributed managed server.

---

**Note.** Depending upon the operation you are carrying out for an existing domain, you may not see this prompt.

---

Please select the configuration to install.

```
->1- Single Server Domain
    2- Multi Server Domain
    3- Distributed Managed Server
```

There are three domain configuration options:

- *Single Server Domain*

This domain configuration contains one server, named PeopleSoft Pure Internet Architecture and the entire PeopleSoft application is deployed to it. This configuration is intended for single user or very small scale, non-production environments. This configuration is very similar to the Oracle WebLogic domain provided in PeopleSoft PeopleTools 8.40 through 8.44.

- *Multi Server Domain*

This domain configuration is contains seven unique server definitions, a Oracle WebLogic cluster, and the PeopleSoft Application split across multiple servers. This configuration is the intended for a production environment.

- *Distributed Managed Server*

This option is an extension of the Multi Server Domain selection and installs the necessary files to boot a managed server. This option requires a Multi Server installation to be performed to some other location, which will contain the configuration for this managed server.

12. Enter the Integration Gateway User and password.

The password must be at least 8 alphanumeric characters.

See *PeopleTools: Integration Broker Administration*.

Please enter the Integration Gateway User and Password.

```
Integration Gateway User [administrator]:
Password []:
Re-type Password []:
```

Press 1 for Next, 2 for Previous, 3 to Cancel or 5 to Redisplay [1] :

13. Enter the AppServer Domain Connection password (optional).

If you configured your Application Server domain to require a Domain Connection password, enter it here. Otherwise, leave it blank. This password will be propagated to the Integration Gateway.

See the information on setting Application Server domain parameters in the *PeopleTools: System and Server Administration* product documentation.

Please enter the AppServer Domain Connection Password.

```
Password []:
Re-type Password []:
```

Press 1 for Next, 2 for Previous, 3 to Cancel or 5 to Redisplay [1] :

14. If you selected Deploy additional PeopleSoft application extensions, enter the location where you installed the PeopleSoft application software, *PS\_APP\_HOME*.

Choose the directory where you previously installed PeopleSoft⇒  
Applications, commonly known as "PS\_APP\_HOME".

Note: If you have installed PeopleSoft Applications outside PeopleTools⇒  
PS\_HOME then choose the PeopleSoft Applications home "PS\_APP\_HOME",⇒  
else leave the default PS\_HOME.

Please specify a directory name or press Enter [/home/FSCM92]

15. For the option Deploy additional PeopleSoft application extensions, select the application packages to deploy, EL PeopleSoft Enterprise Learning Mgmt in this sample prompt:

Please select the application package to deploy:

```
->1- EL PeopleSoft Enterprise Learning Mgmt
    2- FIN-SCM PeopleSoft eProcurement
```

16. Enter a PeopleSoft web site name; the default is ps.

---

**Warning!** The site name can include underscores ( \_ ), but an underscore cannot be followed by a numeric character or the string "newwin" (for example, my\_site\_3 or my\_newwin\_site).

---

Please specify a name for the PeopleSoft web site:  
Website name [ps]:

17. Specify your application server name, its JSL (Jolt Station Listener) port number, its HTTP and HTTPS port numbers, the Authentication Token Domain (optional).

---

**Note.** This prompt may differ depending upon the type of operation you are carrying out for an existing domain.

---

Enter port numbers and summaries.

AppServer name [APPSRVNAME]:

JSL Port [9000]:

HTTP Port [80]:

HTTPS Port [443]:

Authentication Token Domain (optional) []:

- *AppServer name*

For the AppServer name setting, enter the name of your application server.

See "Configuring the Application Server on UNIX."

See "Configuring the Application Server on Windows."

See Understanding the PeopleSoft Pure Internet Architecture.

- *JSL Port*

For the JSL port setting, enter the JSL port number you specified when setting up your application server. (The default value is 9000.)

- *HTTP and HTTPS Port*

The values for the HTTP and HTTPS ports should be greater than 1024. Any port number less than 1024 is reserved and only Root has access to it.

- *Authentication Token Domain*

The value you enter for the Authentication Token Domain must match the value you specify when configuring your application server, as described earlier in this book. In addition, certain installation configurations require that you specify an authentication domain.

See Using Authentication Domains in the PeopleSoft Pure Internet Architecture Installation.

If you enter a value for the Authentication Token Domain, the URL to invoke PeopleSoft Pure Internet Architecture must include the network domain name in the URL. For example, if you do not enter an authentication domain, the URL to invoke PeopleSoft Pure Internet Architecture is

`http://MachineName/ps/signon.html`. If you do enter a value for authentication domain (for example, `.myCompany.com`), the URL to invoke PeopleSoft Pure Internet Architecture is

`http://MachineName.myCompany.com/ps/signon.html`. In addition, if the web server for the database is using an http port other than the default port of 80, the URL must include the port number, for example

`http://MachineName:8080/ps/signon.html` if there is no authentication domain, or

`http://MachineName.myCompany.com:8080/ps/signon.html` if there is an authentication domain. The URL must also comply with the naming rules given earlier in this chapter.

18. Enter the details for the web profile, PROD, or enter another name.

The example below shows the default web profile name, PROD, and default user ID, PTWEBSERVER. The web profile name will be used to configure this web site. You can specify one of the other predelivered web profiles, DEV, TEST, or KIOSK, or enter a different name. If you intend to use a Web Profile User ID other than the default, be sure to review the information on web profile configuration and security in the *PeopleTools: Portal Technology* product documentation.

Please enter the Name of the Web Profile used to configure the web⇒  
server. The user id and password will be used to retrieve the web⇒  
profile from the database. (NOTE: Other available preset web profile⇒

names are "TEST", "DEV", and "KIOSK".)

```
Web Profile Name [PROD]:
User ID [PTWEBSERVER]:
Password []:
Re-type Password []:
```

---

**Note.** If the PeopleSoft PeopleTools version of your database is *below* 8.44, then you will need to add the PTWEBSERVER User Profile before you upgrade to the current PeopleSoft PeopleTools release. The User Profile must include the PeopleTools Web Server role, but do not grant any other roles. Enter the password that you set for the User Profile for the User ID password in this step, as shown in this example. The password must be at least 8 alphanumeric characters.

See the *PeopleTools: Security Administration* product documentation for the steps required to add a User Profile.

---

#### 19. Specify the root directory for the Report Repository.

The default directory is `<user_home>/PeopleSoft Internet Architecture/psreports`, where `<user_home>` is the home directory for the current user.

You must have write access to the specified directory.

---

**Note.** In setting up the Process Scheduler to transfer reports, if you choose the FTP protocol, use the same directory for the Home Directory as you use here for the report repository.

---

See "Setting Up Process Scheduler," Setting Up the Process Scheduler to Transfer Reports and Logs to Report Repository.

Select the Report Repository location:

```
Please specify a directory name or press Enter [/ds1/home/PeopleSoft=>
Internet Architecture/psreports]:
```

#### 20. Verify all of your selections and press Enter to begin the installation.

```
Setup Type : weblogic
```

```
Web server root directory : /data4/WLS1213
```

```
Web server version : 12.1
```

```
Web server domain : peoplesoft
```

```
Internet Architecture app name : PORTAL
```

```
Integration Gateway app name : PSIGW
```

```
PeopleSoft Business Interlink app name : PSINTERLINKS
```

```
Environment Management Hub : PSEMHUB
```

```
Portlet Container app name : pspc
```

```
Site name : ps
```

Authentication Token Domain :

Application server name : APPSRVNAME

JSL port : 9000

Report repository directory : /ds1/home/PeopleSoft Internet→  
Architecture/psreports

PIA webserver directory : /home/psftuser/psft/pt/8.56/webserv

You see a progress indicator showing the progress of your installation.

21. When the installation is complete, exit from the console window.

The default installation directory is for the PIA domain `<PIA_HOME>/webserv/<domain_name>/`, where `<domain_name>` is the web server domain (peoplesoft by default).

## Task 9B-2-4: Uninstalling the PeopleSoft Pure Internet Architecture from Oracle WebLogic

To remove a PIA domain deployed on Oracle WebLogic, delete the `<PIA_HOME>/webserv/<domain_name>` directory. If there is more than one PIA domain, delete the `domain_name` directory for every domain you want to remove.

## Task 9B-3: Installing the PeopleSoft Pure Internet Architecture on IBM WebSphere in Console Mode

---

This section discusses:

- Prerequisites
- Installing the PeopleSoft Pure Internet Architecture on IBM WebSphere Application Server ND
- Uninstalling the PeopleSoft Pure Internet Architecture from IBM WebSphere

### Prerequisites

The information in this section applies to the installation of PeopleSoft Pure Internet Architecture (PIA) on an IBM WebSphere Application Server. PeopleSoft PeopleTools 8.56 requires a 64-bit IBM WebSphere 9.0.0.0 installation. Review these points before you begin the installation:

- Before installing the PeopleSoft Pure Internet Architecture on IBM WebSphere Application Server, you must have installed the IBM WebSphere ND software.  
See "Installing Web Server Products," Installing IBM WebSphere Application Server.
- Each IBM WebSphere Application Server runs one PeopleSoft Pure Internet Architecture application. If you need to install more than one PeopleSoft Pure Internet Architecture application on your WebSphere Application Server, you must run the PIA installation again.
- When installing PIA on IBM WebSphere ND, you must work with a local copy of the PIA installation software; you cannot install remotely. If you are doing the installation on a machine other than the one on which you installed PeopleSoft PeopleTools, copy the `PS_HOME/setup/PsMpPIAInstall` directory to the local machine.



- Both IBM WebSphere Application Server Network Deployment and PeopleSoft Pure Internet Architecture must be installed and deployed using the same user id. Following this restriction avoids any security and profile management issues.

## See Also

"Installing Web Server Products," Installing IBM WebSphere Application Server

## Task 9B-3-1: Installing the PeopleSoft Pure Internet Architecture on IBM WebSphere Application Server ND

To install the PeopleSoft Pure Internet Architecture on IBM WebSphere ND:

1. Change directory to *PS\_HOME*/setup/PsMpPIAInstall and run this command:

```
setup.sh
```

A welcome message appears.

See "Using the PeopleSoft Installer," Running the PeopleSoft Installer, for setup command options.

2. Select Enter to continue.
3. Choose the directory where you want to install the PeopleSoft Pure Internet Architecture, referred to in this documentation as *PIA\_HOME*.
4. Enter 2, to select the IBM WebSphere Application Server:

```
->1- Oracle WebLogic Server
    2- IBM WebSphere Server
```
5. Enter the directory where you installed IBM WebSphere ND, or press ENTER to accept the default:

```
Select the WebSphere Application Server directory:
Directory Name: [/opt/IBM/WebSphere/AppServer]
```
6. Choose whether to create a new application, or use an existing application:

```
->1- Create New WebSphere Application
    2- Existing WebSphere Application
```
7. If you specify 1, Create New WebSphere Application, enter an application name for this web server.

8. Select the type of server you want to install, and press ENTER to continue:

```
Select the server install type:
->1- Single Server Installation
    2- Multi Server Installation
```

The Single Server Installation option creates one IBM WebSphere Application Server profile to hold all the PeopleSoft web applications. The installer uses the Application Name you enter for the new profile's name.

The Multi Server Installation option creates a single profile with the name you entered above, *application\_name*. The *application\_name* profile includes two servers, which deploy discrete functionality and are found on different ports, as specified in the following table:

Server Name	Purpose	HTTP or HTTPS Port Number
server1	PORTAL applications	X
psemhub	PeopleSoft Environment Management Framework applications (PSEMHUB)	X+1

See the information on working with IBM WebSphere in the *PeopleTools: System and Server Administration* product documentation.

9. If you specify 2, Existing WebSphere Application, select a domain name from the list:

```
Select domain name from list
```

```
->1- AppSrv01
    2- ptwas
    3- peoplesoftA
    4- hcdmo
```

10. After specifying an existing domain, select one of the options below and press ENTER to continue.

The PeopleSoft application "peoplesoftA" already exists.

Select from the following:

```
->1- Install additional PeopleSoft site
    2- Redeploy PeopleSoft Internet Architecture
    3- Deploy additional PeopleSoft application extensions
```

---

**Note.** Make sure the server is up and running before choosing any of these options.

---

- *Install additional PeopleSoft site*

Select this option to install only the necessary files for defining an additional PeopleSoft site onto the existing IBM WebSphere web server configuration.

- *Redeploy PeopleSoft Internet Architecture*

This selection affects all of the PeopleSoft Pure Internet Architecture web applications installed to the local IBM WebSphere Application Server profile. The redeployment process updates all of the web components of the PeopleSoft Pure Internet Architecture.

- *Deploy additional PeopleSoft application extensions*

This option is solely for use with PeopleSoft product applications. PeopleSoft application extensions are provided with certain PeopleSoft applications, and this option allows you to deploy those extensions. Consult the installation documentation for your PeopleSoft application to see whether this option is appropriate. PeopleSoft PeopleTools does not use application extensions.

11. Enter the administrator login and password for the IBM WebSphere Application profile, or accept the default values.

The default login ID is system. The password must be at least 8 alphanumeric characters with at least one number or special character.

Please enter the administrator login ID and password for WebSphere⇒ profile.

Login ID [system]:

Password []:

Retype Password []:

If you selected the option Existing WebSphere Application, enter the same Login ID and password as you entered for the original IBM WebSphere profile creation. If the Login ID and password do not match the original values, you will not be able to continue with the PIA installation.

12. If you select the option Deploy additional PeopleSoft application extension, select the application packages you want to deploy:

->1- EMP PeopleSoft Activity Based Mgmt

13. Enter the Integration Gateway User and Password.

The password must be at least 8 alphanumeric characters .

Please enter the Integration Gateway User and Password.

Integration Gateway User [administrator]:

Password []:

Re-type Password []:

Press 1 for Next, 2 for Previous, 3 to Cancel or 5 to Redisplay [1] :

14. Enter the AppServer Domain Connection Password (optional).

If you configured your Application Server domain to require a Domain Connection password, enter it here. Otherwise, leave it blank. This password will be propagated to the Integration Gateway.

See "Configuring the Application Server on UNIX," Creating, Configuring, and Starting an Initial Application Server Domain.

See the information on setting Application Server domain parameters in the *PeopleTools: System and Server Administration* product documentation.

Please enter the AppServer Domain Connection Password.

Password []:

Re-type Password []:

Press 1 for Next, 2 for Previous, 3 to Cancel or 5 to Redisplay [1] :

15. Enter a web site name; the default is ps.

---

**Warning!** The site name can include underscores ( \_ ), but an underscore cannot be followed by a numeric character or the string "newwin" (for example, my\_site\_3 or my\_newwin\_site).

---

16. Specify your application server name, its JSL (Jolt Station Listener) port number, its HTTP and HTTPS port numbers, the authentication token domain (optional).

Enter port numbers and summaries.

AppServer name:

[<App Server Machine Name>]

JSL Port:

[9000]

HTTP Port:

[80]

HTTPS Port:

[443]

Authentication Token Domain:(optional) []

- For the AppServer name setting, enter the name of your application server. For the JSL port setting, enter the JSL port number you specified when setting up your application server. (The default value is 9000.) See "Configuring the Application Server on UNIX."
- The HTTP/HTTPS port numbers are reset to those that you just specified when you restart your IBM WebSphere server.
- The value you enter for the Authentication Token Domain must match the value you specify when configuring your application server, as described earlier in this book. In addition, certain installation configurations require that you specify an authentication domain. See Using Authentication Domains in the PeopleSoft Pure Internet Architecture Installation.
- If you enter a value for the Authentication Token Domain, the URL to invoke PeopleSoft Pure Internet Architecture must include the network domain name in the URL. For example, if you do not enter an authentication domain, the URL to invoke PeopleSoft Pure Internet Architecture is `http://MachineName/ps/signon.html`. If you do enter a value for the authentication domain (for example, `.myCompany.com`), the URL to invoke PeopleSoft Pure Internet Architecture is `http://MachineName.myCompany.com/ps/signon.html`. In addition, if the web server for the database is using an HTTP port other than the default port of 9080, the URL must include the port number, for example `http://MachineName:8080/ps/signon.html` if there is no authentication domain, or `http://MachineName.myCompany.com:8080/ps/signon.html` if there is an authentication domain. The URL must also comply with the naming rules given earlier in this chapter.

See Understanding PeopleSoft Pure Internet Architecture.

17. Enter the details for the web profile, PROD, or enter another name.

The sample prompt shows the default web profile name, PROD, and default User ID, PTWEBSERVER. The web profile name will be used to configure this web site. You can specify one of the other predelivered web profiles, DEV, TEST, or KIOSK, or enter a different name. If you intend to use a Web Profile User ID other than the default, be sure to review the information on web profile configuration and security in the *PeopleTools: Portal Technology* product documentation.

Please enter the Name of the Web Profile used to configure the web⇒  
server. The user id and password will be used to retrieve the web⇒  
profile from the database. (NOTE: Other available preset web profile⇒  
names are "TEST", "DEV", and "KIOSK".)

Web Profile Name [PROD]:

```
User ID : PTWEBSERVER
Password []:
Re-type Password []
```

---

**Note.** If the PeopleSoft PeopleTools version of your database is *below* 8.44, then you will need to add the PTWEBSERVER User Profile before you upgrade to the current PeopleSoft PeopleTools release. The User Profile must include the PeopleTools Web Server role, but do not grant any other roles. Enter the password that you set for the User Profile for the User ID password in this step. The password must be at least 8 alphanumeric characters. See the *PeopleTools: Security Administration* product documentation for the steps required to add a User Profile.

---

18. Specify the root directory for the Report Repository.

You can install to any location, but the directory must have write access. The default directory is *user\_home/PeopleSoft Internet Architecture/psreports*, where *user\_home* is the home directory for the current user.

---

**Note.** In setting up the Process Scheduler to transfer reports, if you choose the FTP protocol, use the same directory for the Home Directory as you use here for the report repository.

---

See "Setting Up Process Scheduler on UNIX," Setting Up Process Scheduler to Transfer Reports and Logs to the Report Repository.

19. Verify your selections and press Enter to start the installation. You see an indicator showing the progress of your installation.
20. When the installation is complete, exit from the console window.

The default installation directory for a specific PIA profile is *<PIA\_HOME>/webserv/<profile\_name>*.

## Task 9B-3-2: Uninstalling the PeopleSoft Pure Internet Architecture from IBM WebSphere

You cannot uninstall PeopleSoft Pure Internet Architecture simply by deleting the directory *<PIA\_HOME>/webserv/<profile\_name>*, without uninstalling it from IBM WebSphere Administration Console. If you do so, the IBM WebSphere registry becomes corrupt, and subsequent attempts to install PeopleSoft Pure Internet Architecture will fail. Instead, if necessary, you must uninstall PeopleSoft Pure Internet Architecture on IBM WebSphere ND as described here:

To uninstall PeopleSoft Pure Internet Architecture on IBM WebSphere:

1. Open the IBM WebSphere Administration Console by entering the following URL in a browser:

```
http://<machine-name>:<administrative_console_port>/ibm/console
```

To find the value for *<administrative\_console\_port>*, refer to *<PIA\_HOME>\webserv\<profile\_name>\logs>AboutThisProfile.txt*.

2. Log in as any user.
3. Choose Applications, Application Types, Websphere enterprise applications.
4. Select the check boxes for the PeopleSoft Pure Internet Architecture applications you want to uninstall, and click Stop.
5. Select the check boxes for the PeopleSoft Pure Internet Architecture applications you want to uninstall, and click Uninstall.
6. Save your configuration.
7. Log out of the IBM WebSphere Administration Console.

8. Stop IBM WebSphere server using one of the following commands:

On Microsoft Windows:

```
<PIA_HOME>\webserv\<profile_name>\bin\stopServer.bat server1
```

On UNIX or Linux:

```
<PIA_HOME>/webserv/<profile_name>/bin/stopServer.sh server1
```

9. In addition to uninstalling the application, you need to remove the IBM WebSphere Application Server profile (that was created during PIA install) to complete the PIA uninstallation.

To uninstall profile run the following steps:

- a. Go to `<PIA_HOME>/webserv/<profile_name>/bin`
- b. Run one of the following commands, where *profile\_name* indicates the application name that you have selected during the PIA install.

On Microsoft Windows:

```
manageprofiles.bat -delete -profileName profile_name
```

On UNIX or Linux:

```
manageprofiles.sh -delete -profileName profile_name
```

- c. Delete the directory `<PIA_HOME>/webserv/<profile_name>`

## Task 9B-4: Installing the PeopleSoft Pure Internet Architecture in Silent Mode

---

This section discusses:

- Understanding the Silent Installation and the Response File
- Editing the Response File
- Running the Silent Mode Installation

### Understanding the Silent Installation and the Response File

You can carry out a silent installation of the PeopleSoft Pure Internet Architecture by providing all the required settings in a response file. With silent installation there is no user interaction. Silent mode installation of PeopleSoft Pure Internet Architecture is supported for both Microsoft Windows and UNIX operating systems platforms, and for both Oracle WebLogic and IBM WebSphere web servers.

#### Task 9B-4-1: Editing the Response File

You need a response file to start the installer in silent mode. The PeopleSoft Pure Internet Architecture installer comes with a response file template (`resp_file.txt`) that can be found under `PS_HOME\setup\PsmPPIAInstall\scripts`. Modify the values in the response file according to your installation requirements. See the previous sections that discuss the installation in GUI and console mode for information on the parameters.

The response file should contain all the input parameters that are needed for deploying PeopleSoft Pure Internet Architecture, such as PS\_CFG\_HOME, DOMAIN\_NAME, SERVER\_TYPE, and so on. Many input parameters are self-explanatory, and the sample response file includes brief definitions in some cases. Here are some additional guidelines:

- Specify `SERVER_TYPE=weblogic` to deploy on Oracle WebLogic.  
For Oracle WebLogic, specify the installation location for `BEA_HOME`.
- Specify `SERVER_TYPE=websphere` to deploy on IBM WebSphere.  
If you installed IBM WebSphere, specify the installation location for `WS_HOME`.
- For information on the optional `PSSERVER` parameter, see the information on configuring Jolt failover and load balancing in the *PeopleTools: System and Server Administration* production documentation.
- `INSTALL_TYPE`
  - `SINGLE_SERVER_INSTALLATION` — This domain configuration contains one server named PIA, and the entire PeopleSoft application is deployed to it. This configuration is intended for single user or very small scale, non-production environments.
  - `MULTI_SERVER_INSTALLATION` — This domain configuration contains seven unique server definitions, an Oracle WebLogic cluster, and the PeopleSoft application split across multiple servers. This configuration is intended for a production environment.
  - `AUTH_DOMAIN` — This is optional. The value you enter for Authentication Token Domain must match the value you specify when configuring your application server, as described earlier in this book. In addition, certain installation configurations require that you specify an authentication domain.  
See Using Authentication Domains in the PeopleSoft Pure Internet Architecture Installation.

---

**Note.** When specifying paths on Microsoft Windows operating systems, use forward slashes (/), as shown in the examples in the response file.

---

*Sample Response file template:*

```
#Following inputs are required in response file for silent installation

# Location of PIA_HOME directory. For windows path should have front=>
  slash '/' instead of back slash '\'
# Set the below variable to the location where you want to install PIA.
# PLEASE NOTE this variable could be ANY DIRECTORY on your machine. It=>
  includes but is definitely not limited to PeopleTools Home.
PS_CFG_HOME=C:/PT8.50

# Name of the PIA domain
DOMAIN_NAME=peoplesoft

# Web server type. Possible values are "weblogic", "websphere"
SERVER_TYPE=weblogic

# WebLogic home, the location where Oracle WebLogic is installed (for Web=>
  Logic deployment only)
BEA_HOME=c:/bea

# WebSphere Home, the location where IBM WebSphere is installed (for Web=>
  Sphere deployment only)
WS_HOME=C:/IBM/WebSphere/AppServer
```

```
# admin console user id/password for securing WebLogic/WebSphere admin=>
  console credential
USER_ID=system
USER_PWD=
USER_PWD_RETYPE=

# Install action to specify the core task that installer should perform.
# For creating new PIA domain - CREATE_NEW_DOMAIN.
# For redeploying PIA - REDEPLOY_PSAPP.
# For recreating PIA domain - REBUILD_DOMAIN.
# For installing additional PSFT site - ADD_SITE
# For installing Extensions - ADD_PSAPP_EXT
INSTALL_ACTION=CREATE_NEW_DOMAIN

# Domain type to specify whether to create new domain or modify existing=>
  domain. Possible values are "NEW_DOMAIN", "EXISTING_DOMAIN".
DOMAIN_TYPE=NEW_DOMAIN

# App home is required only when you are installing extensions from a=>
  decoupled Apps home, please leave it commented otherwise.
# Silent installer can detect the deployable application extensions from=>
  the PS_APP_HOME
# PS_APP_HOME=D:/CR9.2

# Install type to specify whether the installation is a single server or=>
  multi server deployment. Possible values are "SINGLE_SERVER_>
  INSTALLATION", "MULTI_SERVER_INSTALLATION"
INSTALL_TYPE=SINGLE_SERVER_INSTALLATION

# WebSite Name
WEBSITE_NAME=ps

# To enable jolt failover and load balancing, provide a list of=>
  application server domains in the format of; PSSERVER=AppSrvr:JSLport,...
# For example: PSSERVER=SERVER1:9000,SERVER2:9010,SERVER3:9020
# PSSERVER is optional, but if set will have precedence over APPSERVER_>
  NAME & JSL_PORT.
PSSERVER=

# AppServer Name
APPSERVER_NAME=

# Appserver JSL Port
JSL_PORT=

# HTTP Port
HTTP_PORT=80

# HTTPS Port
HTTPS_PORT=443
```



```
# Authentication Domain (optional)
AUTH_DOMAIN=

# Web Profile Name Possible Values are "DEV","TEST","PROD","KIOSK"
WEB_PROF_NAME=PROD

# Web Profile password for User "PTWEBSERVER"
WEB_PROF_PWD=
WEB_PROF_PWD_RETYPE=

# Integration Gateway user profile.
IGW_USERID=administrator
IGW_PWD=
IGW_PWD_RETYPE=

# AppServer connection user profile
APPSRVR_CONN_PWD=
APPSRVR_CONN_PWD_RETYPE=

# Directory path for reports
REPORTS_DIR=
```

## Task 9B-4-2: Running the Silent Mode Installation

Use the response file that you modified for your configuration. Substitute the location where you saved the response file for *<path\_to\_response\_file>* in the following procedures:

To install the PeopleSoft Pure Internet Architecture in silent mode on Microsoft Windows:

1. In a command prompt, go to *PS\_HOME\setup\PsmPPIAInstall*.
2. Run the following command, using forward slashes (/) to specify the path:  
`setup.bat -i silent -DRES_FILE_PATH=<path_to_response_file>`

For example:

```
setup.bat -i silent -DRES_FILE_PATH=D:/PT8.56
```

To install the PeopleSoft Pure Internet Architecture in silent mode on UNIX or Linux:

1. Go to *PS\_HOME/setup/PsmPPIAInstall*.
2. Run the following command, using forward slashes (/) to specify the path:  
`setup.sh -i silent -DRES_FILE_PATH=<path_to_response_file>`

For example:

```
setup.bat -i silent -DRES_FILE_PATH=/home/PT856
```

## Task 9B-5: Configuring the SSL/TLS Port for JSL

---

Supply the SSL/TLS port for JSL in the `configuration.properties` file for the web server.

See *PeopleTools: Integration Broker*, "Installing Web Server-Based Digital Certificates."

1. Using a text editor, open the configuration.properties file in the web server deployment folder located here:  
<PIA\_HOME>\webserv\<DOMAIN\_NAME>\application\peoplesoft\PORTAL.war\WEB\_INF\psftdoc\ps.
2. Locate the psserver section and enter the application server name and the SSL/TLS port.

Enter the SSL/TLS port that you specified for the JSL SSL Port when setting up the application server domain.

See Creating, Configuring, and Starting an Initial Application Server Domain.

```
psserver=<machine_name>:<SSL_port_for_JSL>
```

3. Locate the section Keystore password for ssl connection.

If you reset the SSL/TLS Java Keystore password, enter it here. Otherwise, accept the default value. The default Java Keystore file is located in <PIA\_HOME>\webserv\<DOMAIN\_NAME>\piaconfig\keystore\pskey.

```
#Keystore password for ssl connection
KeyStorePwd=={V1.1}7m40tVwXFNyLc1j6pZG69Q==
```

4. Save and close the file.

## Task 9B-6: Testing and Administering the PeopleSoft Pure Internet Architecture Installation

---

This section discusses:

- Verifying the PeopleSoft Pure Internet Architecture Installation
- Starting and Stopping Oracle WebLogic
- Starting and Stopping IBM WebSphere Application Servers
- Using PSADMIN to Start and Stop Web Servers
- Accessing the PeopleSoft Signon

### Verifying the PeopleSoft Pure Internet Architecture Installation

After installing the PeopleSoft Pure Internet Architecture, you should make sure that your configuration is functional. You can test this by signing on to PeopleSoft, navigating within the menu structure, and accessing pages. (Make sure the application server is configured and booted.) This section includes procedures to start and stop the Oracle WebLogic or IBM WebSphere web servers whenever necessary.

### Task 9B-6-1: Starting and Stopping Oracle WebLogic

If you are using the Oracle WebLogic web server, you need to sign on to Oracle WebLogic before using these commands. If you are using IBM WebSphere instead, go on to the next section. Use the following commands in the Oracle WebLogic domain directory.

---

**Note.** Starting from Oracle WebLogic 9.2 and later releases, all the Life-cycle management scripts and other batch scripts for the PIA server on Oracle WebLogic are located in <PIA\_HOME>\webserv\<domain\_name>\bin folder.

---

- To start Oracle WebLogic Server as a foreground process on a single server, use the following commands:  
On Microsoft Windows:

```
startPIA.cmd
```

On UNIX or Linux:

```
startPIA.sh
```

- To start Oracle WebLogic Server as a foreground process on multiple-servers or distributed servers, use the following commands:
  1. Execute the following command:
    - On Microsoft Windows:

```
startWebLogicAdmin.cmd
```
    - On UNIX or Linux:

```
startWebLogicAdmin.sh
```
  2. Then execute:
    - On Microsoft Windows:

```
startManagedWebLogic.cmd ManagedServerName
```
    - On UNIX or Linux:

```
startManagedWebLogic.sh ManagedServerName
```
- To stop the server, use the following commands:
  - Single Server on Microsoft Windows:

```
stopPIA.cmd
```

Single Server on UNIX or Linux:  

```
stopPIA.sh
```
  - Multiple Servers or Distributed Servers on Microsoft Windows:

```
stopWebLogic.cmd ManagedServerName
```

Single Server on UNIX or Linux:  

```
stopWebLogic.sh ManagedServerName
```

For more information on working with Oracle WebLogic multiple servers or distributed servers, see the *PeopleTools: System and Server Administration* product documentation.

---

**Note.** For more information on working with Oracle WebLogic multiple or distributed servers, search My Oracle Support.

---

## Task 9B-6-2: Starting and Stopping IBM WebSphere Application Servers

This section discusses:


- Starting and Stopping IBM WebSphere Application Servers on Windows
- Starting and Stopping IBM WebSphere Application Servers on UNIX or Linux
- Verifying the IBM WebSphere Installation

## Starting and Stopping IBM WebSphere Application Servers on Windows

To start and stop the WebSphere Application Server Network Deployment 9.0.0.0 (WebSphere ND), use the WebSphere First Steps utility:

1. For example, on Microsoft Windows 2012 R2, access the Apps screen and locate the First steps utility in the IBM WebSphere category.

The following example shows the First steps window for the profile *peoplesoft*:

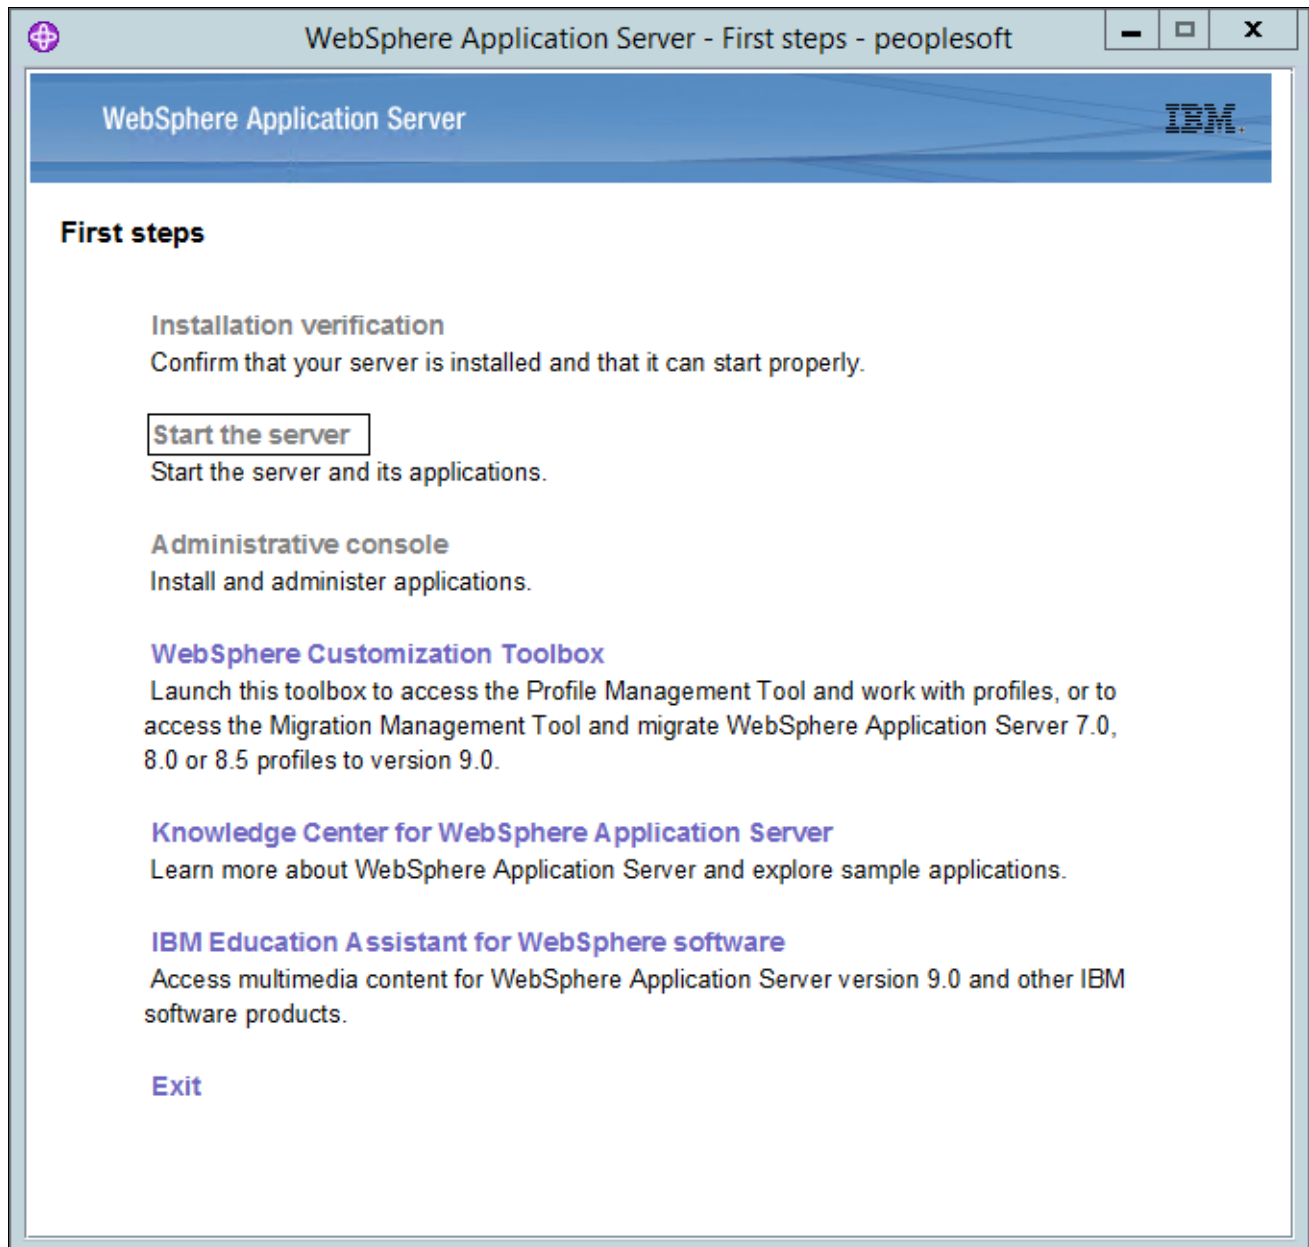

WebSphere Application Server - First steps window

2. Select the link Start the server.

If the server starts properly, a verification window appears with several messages about the initialization process.

- To verify whether the server was installed and can start properly, click the link Installation Verification on the First Step window and review the messages.

```

[5/17/17 18:34:55:850 MDT] 00000001 FfdcProvider W com.ibm.ws.ffdc.impl.FfdcProvider logIncident FFDC1003: FFDC Incident emitted on C:\Users\
[5/17/17 18:35:04:917 MDT] 00000001 SibMessage W [ ] CWSJY0003W: MQJCA5001: WMQ messaging : '9.0.0.0-p900-L160509.1'.
[5/17/17 18:35:08:352 MDT] 0000004c AuthConfigFac W SECJ8032W: AuthConfigFactory implementation is not defined, using the default JASPI factory imple
[5/17/17 18:35:11:601 MDT] 0000004c webcontainer W com.ibm.ws.webcontainer.VirtualHostImpl addVhostEntry SRVE8100W: VirtualHost alias already exists
[5/17/17 18:35:11:604 MDT] 0000004c webcontainer W com.ibm.ws.webcontainer.VirtualHostImpl addVhostEntry SRVE8100W: VirtualHost alias already exists
[5/17/17 18:35:16:379 MDT] 0000004d FfdcProvider W com.ibm.ws.ffdc.impl.FfdcProvider logIncident FFDC1003: FFDC Incident emitted on C:\Users\
[5/17/17 18:40:26:405 MDT] 00000001 WSKeyStore W CWPKI0041W: One or more key stores are using the default password.
[5/17/17 18:40:27:423 MDT] 00000001 FfdcProvider W com.ibm.ws.ffdc.impl.FfdcProvider logIncident FFDC1003: FFDC Incident emitted on C:\Users\
[5/17/17 18:40:27:424 MDT] 00000001 ModuleManifes E UTLS0002E: The shared library psSharedLibrary contains a classpath entry which does not resolve to
[5/17/17 18:40:27:426 MDT] 00000001 ModuleManifes E UTLS0002E: The shared library psSharedLibrary contains a classpath entry which does not resolve to
[5/17/17 18:40:27:427 MDT] 00000001 ModuleManifes E UTLS0002E: The shared library psSharedLibrary contains a classpath entry which does not resolve to
[5/17/17 18:40:27:427 MDT] 00000001 ModuleManifes E UTLS0002E: The shared library psSharedLibrary contains a classpath entry which does not resolve to
[5/17/17 18:40:27:581 MDT] 00000001 FfdcProvider W com.ibm.ws.ffdc.impl.FfdcProvider logIncident FFDC1003: FFDC Incident emitted on C:\Users\
[5/17/17 18:40:32:792 MDT] 00000001 SibMessage W [ ] CWSJY0003W: MQJCA5001: WMQ messaging : '9.0.0.0-p900-L160509.1'.
[5/17/17 18:40:34:404 MDT] 0000004c AuthConfigFac W SECJ8032W: AuthConfigFactory implementation is not defined, using the default JASPI factory imple
[5/17/17 18:40:36:487 MDT] 0000004c webcontainer W com.ibm.ws.webcontainer.VirtualHostImpl addVhostEntry SRVE8100W: VirtualHost alias already exists
[5/17/17 18:40:36:489 MDT] 0000004c webcontainer W com.ibm.ws.webcontainer.VirtualHostImpl addVhostEntry SRVE8100W: VirtualHost alias already exists
[5/17/17 18:40:41:741 MDT] 0000004b FfdcProvider W com.ibm.ws.ffdc.impl.FfdcProvider logIncident FFDC1003: FFDC Incident emitted on C:\Users\w
[5/17/17 19:31:32:812 MDT] 000000a8 FfdcProvider W com.ibm.ws.ffdc.impl.FfdcProvider logIncident FFDC1003: FFDC Incident emitted on C:\Users\
[5/25/17 15:14:43:235 MDT] 00000001 WSKeyStore W CWPKI0041W: One or more key stores are using the default password.
[5/25/17 15:14:54:209 MDT] 00000001 FfdcProvider W com.ibm.ws.ffdc.impl.FfdcProvider logIncident FFDC1003: FFDC Incident emitted on C:\Users\w
[5/25/17 15:14:54:210 MDT] 00000001 ModuleManifes E UTLS0002E: The shared library psSharedLibrary contains a classpath entry which does not resolve to
[5/25/17 15:14:54:215 MDT] 00000001 ModuleManifes E UTLS0002E: The shared library psSharedLibrary contains a classpath entry which does not resolve to
[5/25/17 15:14:54:217 MDT] 00000001 ModuleManifes E UTLS0002E: The shared library psSharedLibrary contains a classpath entry which does not resolve to
[5/25/17 15:14:54:219 MDT] 00000001 ModuleManifes E UTLS0002E: The shared library psSharedLibrary contains a classpath entry which does not resolve to
[5/25/17 15:14:55:452 MDT] 00000001 FfdcProvider W com.ibm.ws.ffdc.impl.FfdcProvider logIncident FFDC1003: FFDC Incident emitted on C:\Users\
[5/25/17 15:15:12:355 MDT] 00000001 SibMessage W [ ] CWSJY0003W: MQJCA5001: WMQ messaging : '9.0.0.0-p900-L160509.1'.
[5/25/17 15:15:18:677 MDT] 0000004e AuthConfigFac W SECJ8032W: AuthConfigFactory implementation is not defined, using the default JASPI factory imple
[5/25/17 15:15:36:366 MDT] 0000004e webcontainer W com.ibm.ws.webcontainer.VirtualHostImpl addVhostEntry SRVE8100W: VirtualHost alias already exists
[5/25/17 15:15:36:368 MDT] 0000004e webcontainer W com.ibm.ws.webcontainer.VirtualHostImpl addVhostEntry SRVE8100W: VirtualHost alias already exists
[5/25/17 15:15:52:215 MDT] 0000004d FfdcProvider W com.ibm.ws.ffdc.impl.FfdcProvider logIncident FFDC1003: FFDC Incident emitted on C:\Users\
IVTL0040I: 42 errors/warnings are detected in the C:\Users\
ipsftpt8.56\webserver\peoplesoft\logs\server1\SystemOut.log file
IVTL0070I: The Installation Verification Tool verification succeeded.
IVTL0080I: The installation verification is complete.

```

First steps output - Installation verification window

## Starting and Stopping IBM WebSphere Application Servers on UNIX or Linux

To start WebSphere ND on UNIX or Linux, use the following command:

```
<PIA_HOME>/webserv/<profile_name>/bin/startServer.sh <server_name>
```

For example:

```
/home/pt856/webserver/peoplesoft/bin/startServer.sh server1
```

To stop WebSphere ND, use the following command:

```
<PIA_HOME>/webserv/<profile_name>/bin/stopServer.sh <server_name>
```


## Verifying the IBM WebSphere Installation

Use this method to verify the WebSphere ND and PIA installation for both Microsoft Windows and UNIX.

To verify the WebSphere ND and PIA installation, copy the following URL into a browser address bar, substituting your machine name and the http port number:

```
http://<machine_name>:<http_port>/ivt/ivtservlet
```

You should see the text "IVT Servlet" in the browser, as in this example:

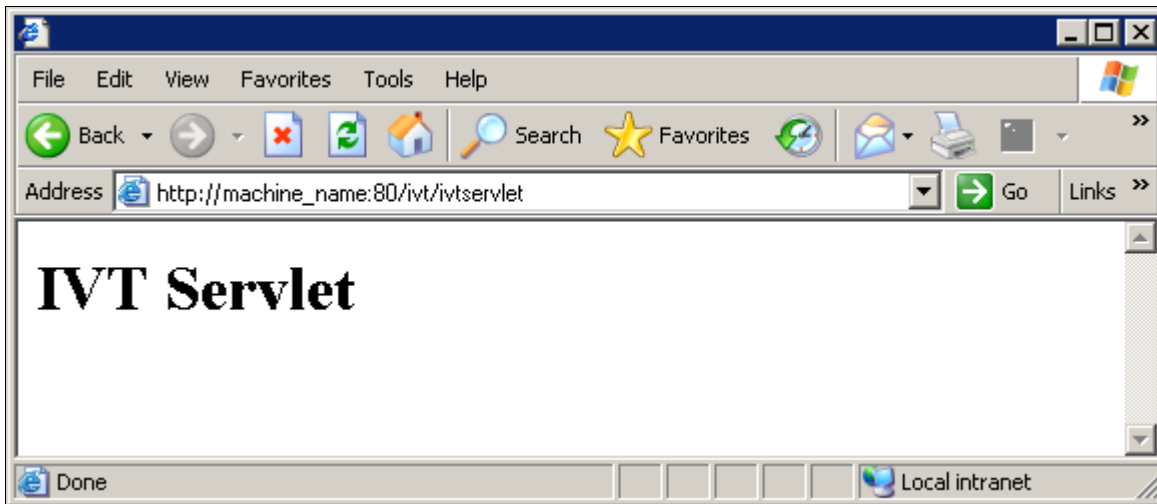

IVT Servlet window

You should also sign into the PeopleSoft application, as described in a later section, to verify the installation. See *Accessing the PeopleSoft Signon*.

### Task 9B-6-3: Using PSADMIN to Start and Stop Web Servers

In addition to the methods given in the previous sections for starting and stopping Oracle WebLogic and IBM WebSphere web servers, in PeopleSoft PeopleTools 8.52 and later releases you can use PSADMIN to administer a web server domain.

See *PeopleTools: System and Server Administration*.

To start and stop web servers:

1. Run the `psadmin` command.
2. Specify `4` for Web (PIA) Server.

```
-----
PeopleSoft Server Administration
-----
```

```
PS_HOME:      /home/pt856
PS_CFG_HOME:  /home/psft_AppServ
```

- ```

1) Application Server
2) Process Scheduler
3) Search Server
4) Web (PIA) Server
5) Switch Config Home
6) Replicate Config Home
q) Quit
```

```
Command to execute (1-6, q): 4
```

The location of Config Home is the current working directory. The PSADMIN utility determines the Config Home directory by checking for the `PS_CFG_HOME` environment variable. If that is not set, it checks for the

presence of domains in the default *PS\_CFG\_HOME* location. If none exists, it uses the *PS\_HOME* location from which it was launched.

See "Preparing for Installation," Defining Installation Locations.

3. Select *l* for Administer a domain.

```
-----
PeopleSoft PIA Administration
-----

PIA Home:    /home/psft_WebServ

1) Administer a domain
2) Create a domain
3) Delete a domain

q) Quit
```

Command to execute: **1**

The PSADMIN utility determines the PIA Home location displayed here by first checking for a *PIA\_HOME* environment variable. If none is set, it checks for the *PS\_CFG\_HOME* environment variable. If neither is set, it uses the default *PS\_CFG\_HOME* directory.

4. Select the domain you want to administer by entering the appropriate number.

```
-----
PeopleSoft PIA Domain Administration - Choose a Domain
-----

1) psftTST
2) peoplesoft

q) Quit
```

Command to execute: **2**

5. To start a web server domain, enter *l*, Boot this domain.

```
-----
PeopleSoft PIA Domain Administration
-----

PIA Home:    /home/psft_websrv
PIA Domain:  peoplesoft
Domain Status: stopped

1) Boot this domain
2) Shutdown this domain
3) Get the status of this domain
4) Configure this domain
5) Edit configuration files
6) View log files
7) Administer a site
8) Delete a site

q) Quit
```

Command to execute: **1**

The boot command invokes the startPIA.sh script, and you see the progress and a status message on the console window.

```
Starting the domain.....
...
Verifying domain status..
The domain has started.
```

6. To stop a web server domain, select 2, Shutdown this domain.

The shutdown command invokes the stopPIA.sh script, and you see the progress and a status message on the console window.

```
Stopping the domain.....
.....
Verifying domain status.....
The domain has stopped.
```

7. Select 1 to install a service, or 2 to remove it.

This command invokes the installNTservice script, and creates a service named *WebLogicDomain-WebLogicServer*.

```
-----
Windows Service Setup
-----

PIA Home:      C:\psft_websrv
PIA Domain:    peoplesoft
Domain status: started

1) Install Service
2) Uninstall Service

q) Quit
```

Command to execute:

## Task 9B-6-4: Accessing the PeopleSoft Signon

To access the PeopleSoft signon:

1. Open your web browser.



2. Enter the name of the site you want to access—for example (the default value for `<site_name>` is `ps`):

```
http://<machine_name>:<http_port>/<site_name>/signon.html
```

---

**Note.** PeopleSoft Pure Internet Architecture installed on IBM WebSphere server listens at the HTTP/HTTPS ports specified during the PeopleSoft Pure Internet Architecture install. Invoke PeopleSoft Pure Internet Architecture through a browser by using the specified HTTP or HTTPS ports—that is, `http://<WebSphere_machine_name>:<server_port>/<site_name>/signon.html` (if `AuthTokenDomain` is not specified) or `http://<WebSphere_machine_name.mycompany.com>:<server_port>/<site_name>/signon.html` (if you specified `.mycompany.com` as the `AuthTokenDomain`). You can find the HTTP and HTTPS ports in the file `<PIA_HOME>/webserv/<domain_name>/logs/AboutThisProfile.txt`.

---

This will take you to the sign-in window corresponding to your browser's language preference, as shown in this example:



Oracle PeopleSoft Enterprise Sign in window

---

**Note.** If you do not see the signon screen, check that you supplied all the correct variables and that your application server and the database server are running.

---

3. Sign in to the PeopleSoft system by entering a valid user ID and password.

The user ID and password are case sensitive.

---

**Note.** The user ID and password were set during the database configuration and also used to boot the application server.

---

The PeopleSoft PeopleTools and PeopleSoft applications include various default user IDs. For information on using the user IDs delivered with your PeopleSoft application demo database, see the application-specific installation instructions. For information on using and securing PeopleSoft PeopleTools default user IDs, see the information on administering user profiles in the *PeopleTools: Security Administration* product documentation.

## **Task 9B-7: Completing Post-Installation Steps**

---

This section discusses:

- Using Fluid User Interface
- Setting Options for Multilingual Databases
- Updating PeopleTools Options
- Updating Time Zone Information
- Updating Database Information

### **Task 9B-7-1: Using Fluid User Interface**

When you sign in to your PeopleSoft application, you may see the PeopleSoft Fluid User Interface by default. To access the menu items, as seen in the classic user interface, from the PeopleSoft Fluid User Interface:


1. On the PeopleSoft Fluid User Interface, shown in this example, select (press) the NavBar button at the top right (diamond inside a circle).



PeopleSoft Fluid User Interface home page

The Navigation bar (NavBar) side page appears.


2. Select (press) Navigator.

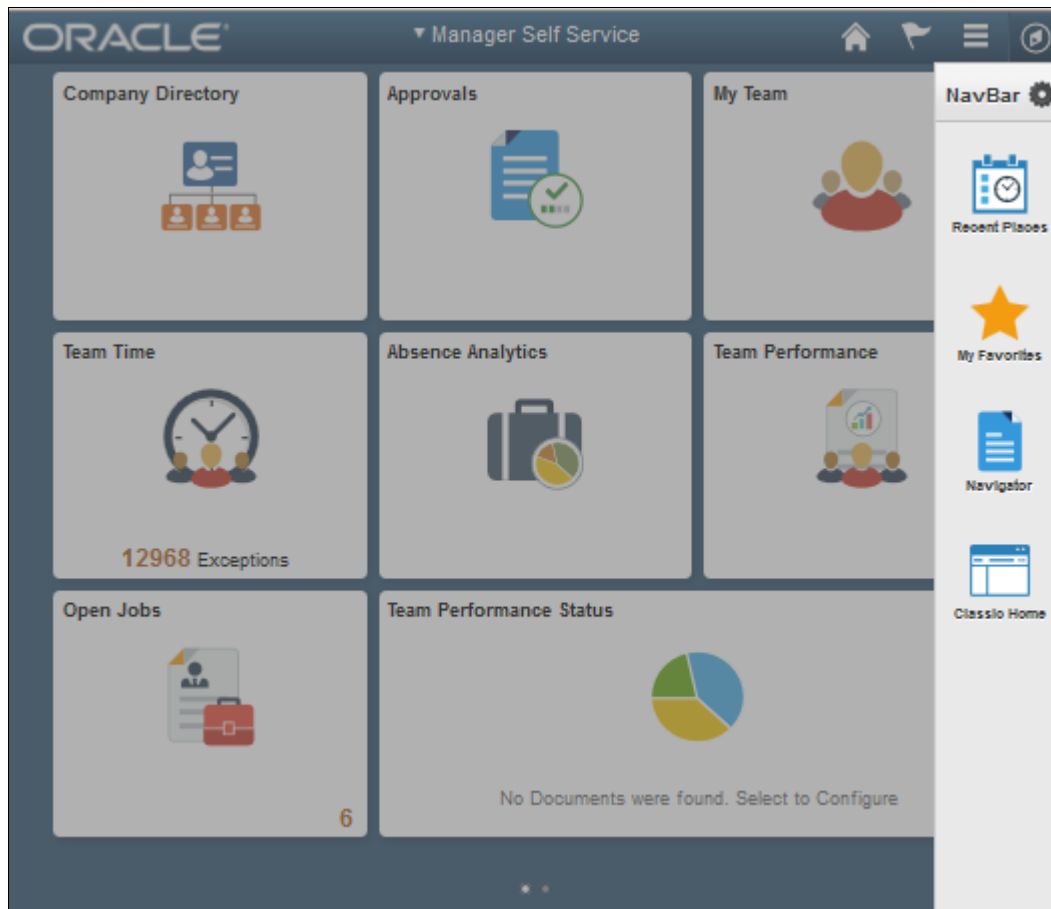

NavBar side page

The menu structure appears.

3. Navigate to the desired item, such as Set Up HCM or PeopleTools.

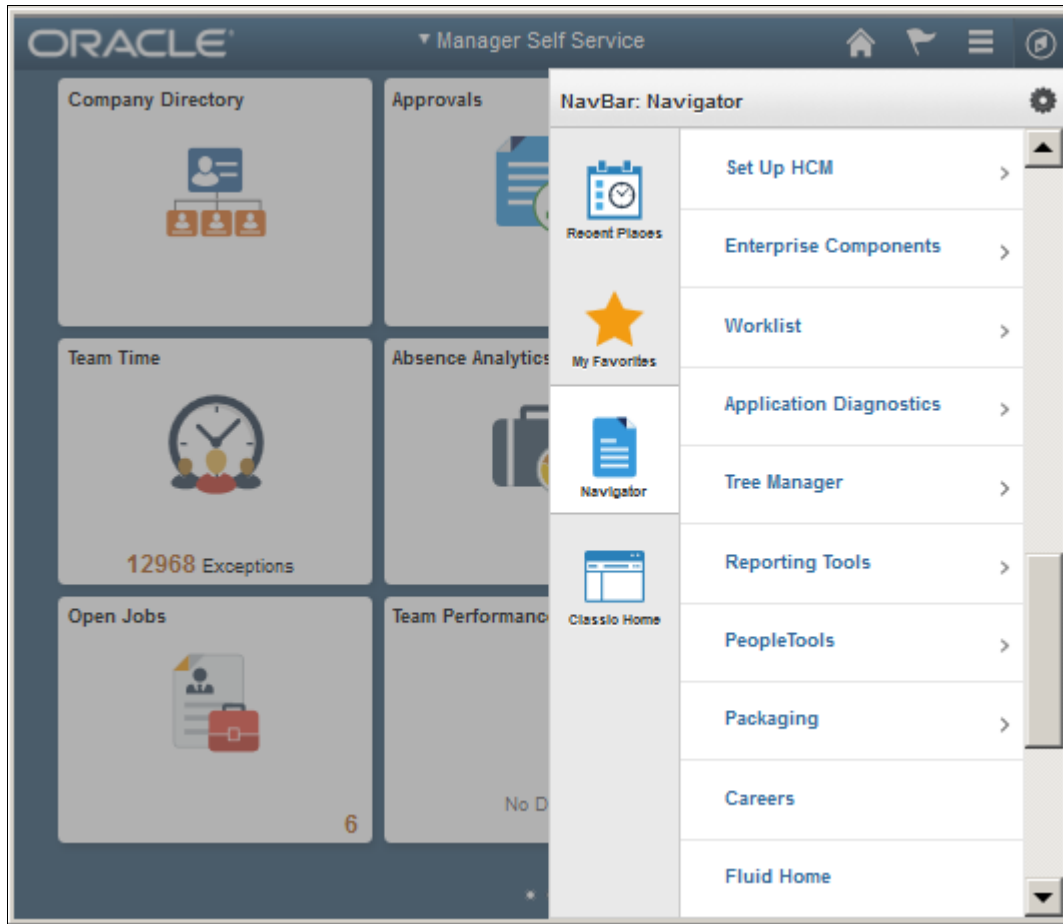

Navigator side page with PeopleSoft menu items

## See Also

*PeopleTools: Applications User's Guide*, "Working With Fluid Homepages"

*PeopleTools: Fluid User Interface Developer's Guide*

## Task 9B-7-2: Setting Options for Multilingual Databases

### Setting the Data Field Length Checking Option

The value to specify data field length checking must be set correctly in order for PeopleSoft applications to perform correctly in a browser. Use one of these methods to set the data field length checking option:

- Select PeopleTools, Utilities, Administration, PeopleTools Options, and select the Data Field Length Checking option from the drop-down list.
- Alternatively, use the SQL tool for your database platform to modify the DBLENGTHTYPE parameter in the PSOPTIONS table.

See *PeopleTools: Global Technology*, "Setting Data Field Length Checking."

See *PeopleTools: Global Technology*, "Selecting Character Sets."

Use the guidelines in this table to select the correct option for your environment:

| Environment                                                                                                                                 | PeopleTools Option Page Selection                                   | PSOPTIONS.DBLENGHTHYPE Value |
|---------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|------------------------------|
| Unicode-encoded database or a non-Unicode SBCS database                                                                                     | Others                                                              | N                            |
| Japanese database on DB2 LUW                                                                                                                | DB2 MBCS                                                            | D                            |
| Non-Unicode Japanese database<br><b>Note.</b> If your installation uses the Shift-JIS character set for Japanese, you must use this option. | MBCS<br><b>Note.</b> The MBCS option is not supported for DB2 z/OS. | M                            |

### Setting the Unicode Enabled Option

If you are running a Unicode database, verify that the UNICODER\_ENABLED parameter in the PSSTATUS table is set correctly. For example:

- For non-Unicode databases, including those using the Shift-JIS character set for Japanese, set UNICODER\_ENABLED=0.
- For Unicode databases, set UNICODER\_ENABLED=1.

See the information on converting to Unicode in the *PeopleTools: Global Technology* product documentation.

### Task 9B-7-3: Updating PeopleTools Options

You can set the following options on the PeopleTools Options page:

- Multi-Currency — Select this check box if you plan to use currency conversion.  
See *PeopleTools: Global Technology*, "Using System-Wide Multicurrency Settings."
- Base Time Zone — Enter a value for the base time zone for your PeopleTools database.  
See *PeopleTools: Global Technology*, "Setting the Base Time Zone."
- Sort Order Option — If you specified a non-binary sort order for your database, choose the Sort Order Option that most closely approximates your database sort order.  
See *PeopleTools: Global Technology*, "Setting the Sort Order."

### Task 9B-7-4: Updating Time Zone Information

Additional steps may be required to configure your time zone after you complete the installation.

See *PeopleTools: Global Technology*, "Maintaining Time Zones."

## Task 9B-7-5: Updating Database Information

The database information updated in this procedure is used by the PeopleSoft software update tools to identify your PeopleSoft database when searching for updates. These steps should be followed for all additional databases that you create to enable the accurate identification of your databases.

1. Sign on to your PeopleSoft database.
2. Navigate to PeopleTools, Utilities, Administration, PeopleTools Options.
3. Specify long and short names for your environment. For example:
  - Environment Long Name — Customer HR Demo Database
  - Environment Short Name — HR Demo DB
4. Select a system type from the drop-down list. For example, Demo Database.
5. Save your changes.





## Chapter 10A

# Setting Up Process Scheduler on Windows

This chapter discusses:

- Prerequisites
- Preparing the Process Scheduler File System for a PeopleTools-Only Upgrade
- Setting Up Process Scheduler Security
- Setting Up Process Scheduler to Transfer Reports and Logs to the Report Repository
- Setting Environment Variables
- Setting Up Process Scheduler Server Agent
- Starting Process Scheduler as a Windows Service (Optional)
- Configuring the Process Scheduler for Microsoft Word (Optional)
- Configuring Setup Manager
- Installing Products for PS/nVision

## Prerequisites

---

Before setting up your Process Scheduler, you must:

- Install Tuxedo.  
See "Installing Additional Components."
- Install database connectivity to be able to communicate with your database server (Process Scheduler requires a direct connection to the database).  
See "Preparing for Installation."
- Set up the web server with the PeopleSoft Pure Internet Architecture, as described in the previous chapter. This is required to set up the Process Scheduler to transfer reports or log files to the Report Repository.
- Set up your COBOL batch environment if you need to run COBOL processes through Process Scheduler. If the PeopleSoft modules purchased do not contain any COBOL modules, the COBOL run time libraries are not required. Also, COBOL is not required for applications that contain no COBOL programs. Consult My Oracle Support for the details on whether your application requires COBOL.  
See "Preparing for Installation," Planning Your Initial Configuration.
- Install the Microsoft Office products Microsoft Word and Microsoft Excel.
- Have both your application server and the PeopleSoft Pure Internet Architecture started. In this chapter, you must modify security options of the designated PeopleSoft user ID that will be used to boot up Process Scheduler. This requires that the user ID's profile be modified through the User Security component. Please refer to earlier chapters for the details on starting the application server and the PeopleSoft Pure Internet Architecture.

- Refer to the following location for required DB2CLI.INI and registry settings.

See "Creating a Database," Fulfilling PeopleSoft Database Configuration Wizard Prerequisites.

In PeopleSoft PeopleTools 8.50 and later, the configuration and log files for Process Scheduler server domains reside in *PS\_CFG\_HOME*. If you do not set a *PS\_CFG\_HOME* environment variable before beginning the application server configuration, the system installs it in a default location based on the current user's settings, as follows:

```
%USERPROFILE%\psft\pt\<peopletools_version>
```

See "Preparing for Installation," Defining Installation Locations.

See the product documentation *PeopleTools: System and Server Administration* for more information on the *PS\_CFG\_HOME* environment variable and working with server domain configuration.

## See Also

*PeopleTools: Process Scheduler*

My Oracle Support, Certifications

## Task 10A-1: Preparing the Process Scheduler File System for a PeopleTools-Only Upgrade

---

When performing the installation of the separate upgrade *PS\_HOME* or *PS\_CFG\_HOME* (which is different than your old release *PS\_HOME*), you may configure your Process Scheduler at this point in time of the installation, but do not boot your Process Scheduler until directed to do so within the upgrade.

If you are installing into an existing *PS\_HOME* or *PS\_CFG\_HOME* after completing a PeopleTools-only upgrade, review your old *PS\_HOME* or *PS\_CFG\_HOME* for configuration files that you may want to reuse for the new PeopleSoft PeopleTools release. While you may configure your Process Scheduler at this point in time of the installation, do not boot your Process Scheduler until directed to do so within the upgrade.

See "Preparing for Installation," Preparing for the PeopleTools-Only Upgrade.

## Task 10A-2: Setting Up Process Scheduler Security

---

This section discusses:

- Understanding Process Scheduler Security
- Changing User Account to Start ORACLE ProcMGR V12.2.2.0.0\_VS2015
- Granting Process Scheduler Administrative Rights

### Understanding Process Scheduler Security

This task—in which you set up the PeopleSoft User ID that will be used to boot Process Scheduler server so it has administrative rights to both Process Scheduler and Report Manager—guarantees that security is set up properly both in Microsoft Windows and within your PeopleSoft database.

You must carry out this task to start Process Scheduler successfully.


In the next section you set up ORACLE ProcMGR V12.2.2.0.0\_VS2015 with a network user ID. When you install Oracle Tuxedo, the ORACLE ProcMGR V12.2.2.0.0\_VS2015 service is set up by default to be started by local system account—a user account that does not have access to the Windows network. If the Process Scheduler server or processes initiated through Process Scheduler will be using a network printer, accessing files from a network drive, or using Microsoft Windows utilities such as XCOPY that may access UNC paths, you need to change the user account used to start ORACLE ProcMGR V12.2.2.0.0\_VS2015 with a network user account.

## Task 10A-2-1: Changing User Account to Start ORACLE ProcMGR V12.2.2.0.0\_VS2015

To change User Account to start ORACLE ProcMGR V12.12.2.0.0\_VS2015:

1. Launch the Services dialog box; for example, on Microsoft Windows 2012 R2, select Administrative Tools, Services.

In the Services dialog box, find the service labeled *ORACLE ProcMGR V12.2.2.0.0\_VS2015*. This service is installed automatically when you install Tuxedo, and is highlighted in this example.

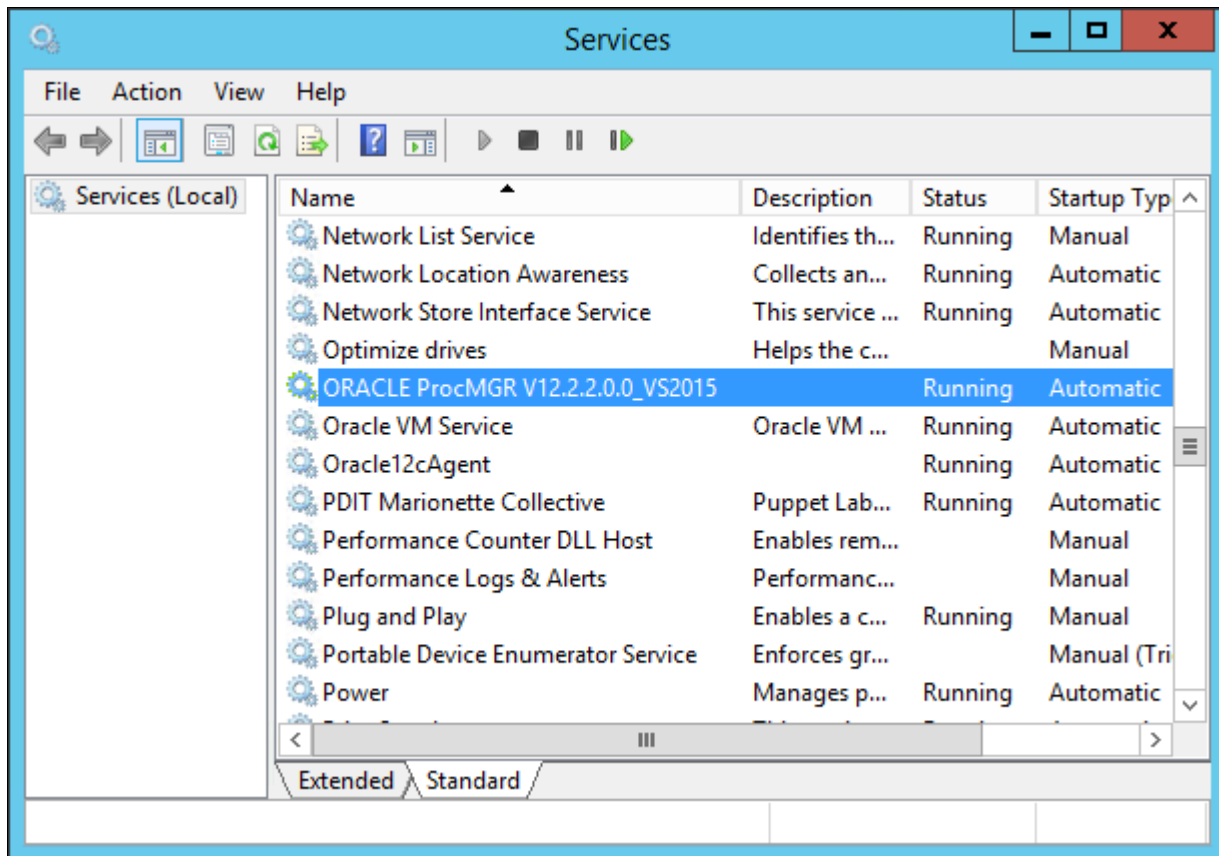


Microsoft Windows Services dialog box with ORACLE ProcMGR service highlighted

2. If the Stop button is enabled, click it to stop the current ORACLE ProcMGR V12.2.2.0.0\_VS2015 process.
  - a. Click Yes when a message informs you of the status change.
  - b. Double-click ORACLE ProcMGR V12.2.2.0.0\_VS2015.  
The Properties dialog box appears.

3. Select the option This account on the Log On tab.

Enter an account name and password. In this example, the account name is CORP\USER1.

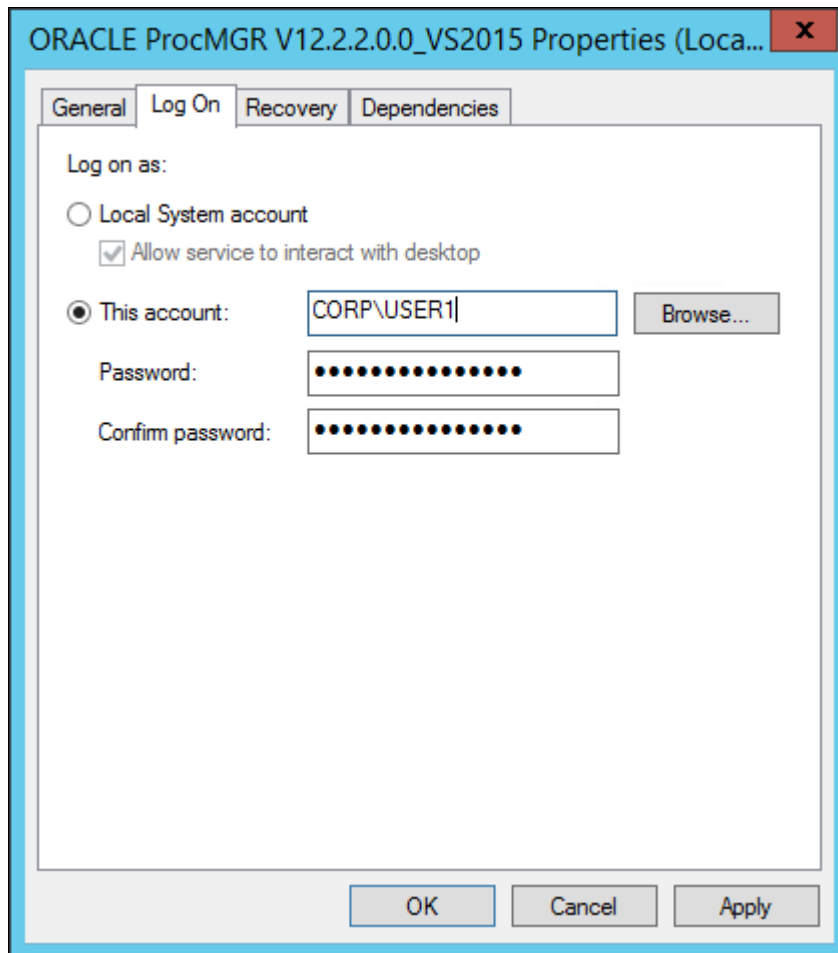

ORACLE ProcMGR V12.2.2.0.0\_VS2015 Properties dialog box: Log On tab


---

**Note.** When you configure your Oracle Tuxedo server as outlined in the chapter, "Configuring the Application Server on Windows," the user ID designated to be the Application Server Administrator must have read/write permissions to the PeopleSoft file directory and read permission to the %TUXDIR% directory, such as C:\oracle\tuxedo12.2.2.0.0\_VS2015.

---

4. Select the General tab.

Make sure that Startup Type is set to Automatic, as shown in this example, and click OK.

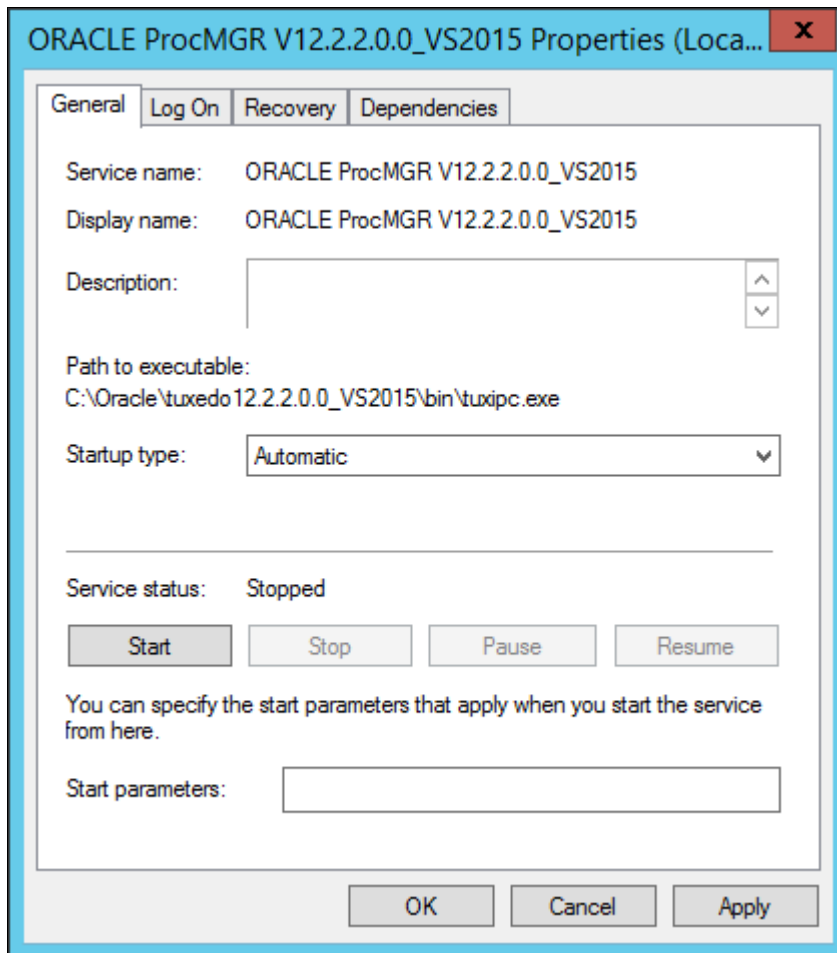

ORACLE ProcMGR V12.1.3.0.0\_VS2012 Properties dialog box: General tab

5. Click Start.

A message in the Properties dialog box will indicate the "Started" status. You also see the status in the Services dialog box. Click OK to close the dialog box.

## Task 10A-2-2: Granting Process Scheduler Administrative Rights

To grant Process Scheduler administrative rights:

1. Log onto your PeopleSoft database through the PeopleSoft Pure Internet Architecture.
2. Select PeopleTools, Security, User Profiles.
3. Select the User Profiles component. Use the Search dialog to select the PeopleSoft User ID you plan to use to boot the Process Scheduler server.

- Click the Roles tab, click the plus icon to insert a new row, and there enter the *ProcessSchedulerAdmin* role to grant the user ID with administrative rights in the Process Scheduler components.

The screenshot shows the Oracle PeopleTools Security User Profiles Roles tab. The page header includes the Oracle logo and navigation links like Home, Worklist, MultiChannel Console, Add to Favorites, and Sign. The breadcrumb trail is Favorites > Main Menu > PeopleTools > Security > User Profiles > User Profiles. The 'Roles' tab is selected, and the 'User ID' is 'QEDMO' and the 'Description' is 'QE User'. The 'Dynamic Role Rule' section on the left has buttons for 'Test Rule(s)', 'Refresh', and 'Execute Rule(s)', along with links for 'Process Monitor' and 'Service Monitor'. The 'User Roles' table lists the following roles:

| Role Name                | Description                 | Dynamic                  | Route Control | View Definition |
|--------------------------|-----------------------------|--------------------------|---------------|-----------------|
| PTF Administrator        | PTF Administrator           | <input type="checkbox"/> | Route Control | View Definition |
| PeopleSoft Administrator | PeopleSoft Admin Privileges | <input type="checkbox"/> | Route Control | View Definition |
| PeopleSoft User          | PeopleSoft User             | <input type="checkbox"/> | Route Control | View Definition |
| Portal Administrator     | Portal Administrator        | <input type="checkbox"/> | Route Control | View Definition |
| Portal Manager           | Portal Manager              | <input type="checkbox"/> | Route Control | View Definition |
| ProcessSchedulerAdmin    | Process Scheduler Admin     | <input type="checkbox"/> | Route Control | View Definition |
| QE Role                  | QE Role                     | <input type="checkbox"/> | Route Control | View Definition |
| Search Administrator     | Search Administrator        | <input type="checkbox"/> | Route Control | View Definition |
| Search Developer         | Search Developer            | <input type="checkbox"/> | Route Control | View Definition |
| ReportDistAdmin          | Report Distribution Admin   | <input type="checkbox"/> | Route Control | View Definition |

At the bottom of the page, there are buttons for Save, Return to Search, Previous in List, Next in List, Add, and Update/Display. The breadcrumb trail at the bottom is General | ID | Roles | Workflow | Audit | Links | User ID Queries.

Process Scheduler window: Roles tab

- Repeat the instructions in step 4 to add the role *ReportDistAdmin*.  
This will grant the user ID administrative rights to the Report Manager component. Carry out this step only if the same user is also responsible for maintaining the content of Report Manager.
- Click Save to save your changes.
- Select the General tab and jot down the Permission List name assigned to the Process Profile field.
- From the Portal menu, choose PeopleTools, Security, Permissions & Roles, Permission Lists.
- In the Search dialog, enter the Permission List you noted in step 7.
- Select the Can Start Application Server check box.
- Click Save to save your changes.

## Task 10A-3: Setting Up Process Scheduler to Transfer Reports and Logs to the Report Repository

This section discusses:

- Understanding Report Distribution

- Setting Up Single Signon to Navigate from PIA to Report Repository
- Determining the Transfer Protocol
- Starting the Distribution Agent
- Setting Up the Report Repository
- Setting Up the Distribution for Your Process Scheduler Server
- Setting Up Sending and Receiving of Report Folders in the Report Manager

## Understanding Report Distribution

The PeopleSoft PeopleTools Report Distribution lets you access reports and log files generated from process requests run by a Process Scheduler Server Agent. Using the PeopleSoft Pure Internet Architecture, you can view reports and log files from the web browser through the Report Manager or Process Monitor Detail page. Report Distribution enables you to restrict access to these reports to authorized users based either on user ID or role ID.

This product also includes the Distribution Agent component, which runs on the same server as the Process Scheduler Server Agent. The Distribution Agent, a process that runs concurrently with the Process Scheduler Server Agent, transfers to the Report Repository files generated by process requests initiated by the Process Scheduler Server Agent.

The Distribution Agent transfers files to the Report Repository when one of these criteria is true:

- The Process Scheduler Server Agent is set up in the *Server Definition* to transfer all log files to the Report Repository.
- The process request output destination type is *Web/Window*.

In either case, the Process Scheduler Server Agent inserts a row in the Report List table (PS\_CDM\_LIST). The server agent then updates the distribution status for a process request to *Posting* upon completion of the program associated with the process request. The distribution status of *Posting* signals that the files for the process request are ready for transfer to the Report Repository. The Distribution Agent is notified by Process Scheduler for any process requests that are ready for transferring. As part of the process to transfer files to the Report Repository, the Distribution Agent performs the following steps:

- *Transfer files to the Report Repository.* All the report and log files are transferred to the Report Repository. For each process request transferred, a directory is created in the Report Repository using the following format: \<database name>\<date yyymmdd>\<report id>. All the files for a process request are stored in this directory.
- *Delete the directory from the Process Scheduler Agent's Log/Output directory.* When the output destination type specified for a process request is *Web/Window*, all the files and directory associated with the process request are deleted from the Process Scheduler Log/Output directory after the files are transferred to the Report Repository.

The following diagram illustrates the Process Scheduler and Report Repository architecture. The diagram includes the following items:


- The web browser gives access to the Process Request dialog and the Report or Log Viewer.
- The Report Repository is part of the PeopleSoft Pure Internet Architecture.

---

**Note.** The PeopleSoft Pure Internet Architecture must be installed for Process Scheduler to be able to transfer reports to the Report Repository.

---

- The Process Scheduler Server includes the Process Scheduler Server Agent and the Distribution Agent.
- The transfer protocol between Process Scheduler and the Report Repository may be FTP/FTPS, XCOPY, HTTP/HTTPS, or SFTP.

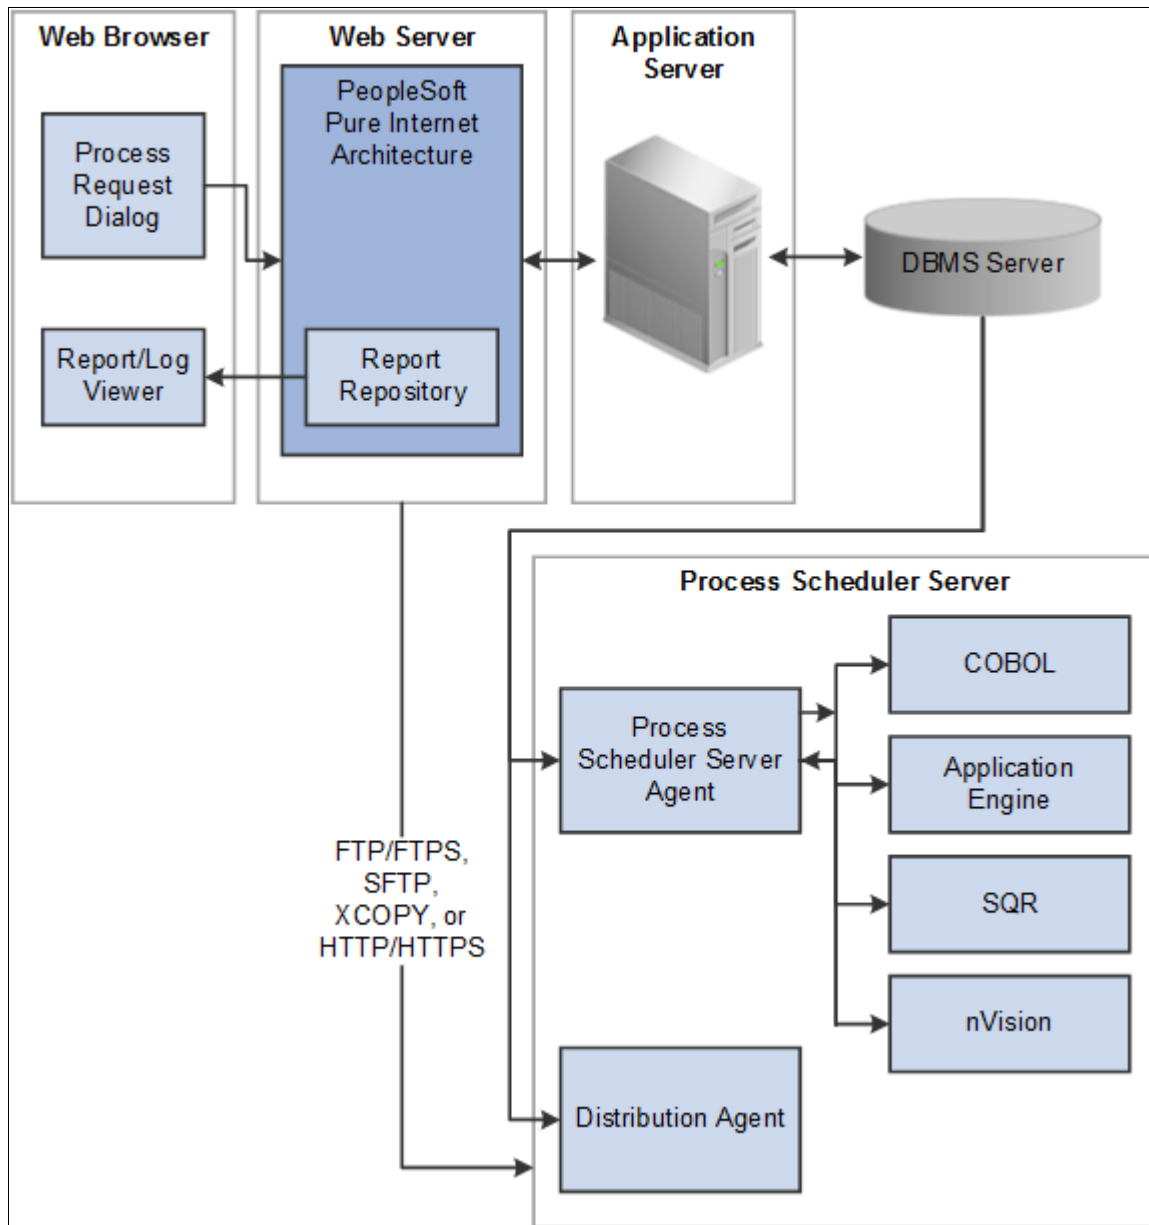

Process Scheduler and Report Repository Architecture

Before users can view a report, they are authenticated against the PeopleSoft database.

You should set up single signon if you do not want users to have to log on an additional time to view reports in the Report Repository. For the details on setting up single signon, consult the security documentation.

See *PeopleTools: Security Administration*.



## Task 10A-3-1: Setting Up Single Signon to Navigate from PIA to Report Repository

To view reports (log files or system files) from Report Repository, you need to pass the authentication. Report Repository should be treated as a separate PeopleSoft application. To navigate from PeopleSoft Pure Internet Architecture (PIA) to Report Repository, you need to set up single signon to avoid getting a prompt for a second signon. This section includes some considerations for setting up single signon to navigate from PIA to Report Repository.

If Report Repository resides on the same web server as PIA, make sure your Local Message Node is set up to be a "trusted" node for single signon for your system.

If Report Repository resides on a different web server than PIA, do the following:

- Make sure your Local Message Node is set up to be a "trusted" node for single signon for your system.
- Use a fully qualified domain name when addressing the web server for both PIA and Report Repository. For example, enter `http://<machineName>.peoplesoft.com/<site_name>/signon.html` instead of `http://<machineName>/<site_name>/signon.html`.
- Specify the Authentication Domain for your application during installation. If you have multiple applications, and you want them to employ single signon, it is important to specify the same Authentication Domain for all applications.

See the information on implementing single signon in the *PeopleTools: Security Administration* product documentation.

- Set up single signon with a password, like this:
  - Choose PeopleTools, Integration Broker, Integration Setup, Nodes.
  - Click Search and then select the node marked as Default Local Node.
  - Select *Password* for the Authentication Option.
  - Enter a password of your choice.
  - Enter the password again in the Confirm Password field.
  - Enter the user ID for which you are setting up single signon in the Default User ID field.
  - Save the Node Definition.
  - Sign out from the PeopleSoft application.
  - Reboot your application server.

### See Also

*PeopleTools: Security Administration*

## Task 10A-3-2: Determining the Transfer Protocol

*We recommend using HTTP as your transfer protocol.*

Before transferring the files to the Report Repository, you need to determine which transfer protocol to use. If you have a Microsoft Windows Process Scheduler and a Microsoft Windows web server, you can use either an XCOPY, FTP/FTPS, SFTP, or HTTP/HTTPS protocol. (If FTP information is not specified, Process Scheduler will perform an XCOPY.) If you have a PeopleSoft Process Scheduler on Microsoft Windows and a UNIX web server, you can use FTP/FTPS, SFTP, or HTTP/HTTPS. If you have a PeopleSoft Process Scheduler on UNIX, you can use FTP/FTPS, SFTP, or HTTP/HTTPS.

---

**Note.** If you are using FTP/FTPS or SFTP, the corresponding service must be set up in your web server.

---

**Note.** JRE is installed automatically on your Process Scheduler server.

---

### Task 10A-3-3: Starting the Distribution Agent

The Distribution Agent is automatically started as another Oracle Tuxedo server when a Process Scheduler Server is booted. If a Process Scheduler Server was set up without specifying a Distribution Node in the *Server Definition* page, the Process Scheduler server will have a status in Process Monitor of "Running with No Report Node." After a node is defined for the Process Scheduler server, in the next cycle the Process Scheduler server checks the state of the system, and the Distribution Agent dynamically sets up its environment.

### Task 10A-3-4: Setting Up the Report Repository

This section discusses:

- Defining ReportRepositoryPath
- Defining the Report Node to Use HTTP/HTTPS
- Defining the Report Node to Use XCOPY
- Defining the Report Node to Use FTP
- Defining the Report Node to Use FTPS
- Defining the Report Node to Use SFTP

#### Defining ReportRepositoryPath

The ReportRepositoryPath specifies the location of a directory for the Report Repository. You can specify the location for the Report Repository Path on the General page of the Web Profile during installation. If you do not set the location in the Web Profile, the location given by ReportRepositoryPath in the configuration.properties file is used for the default location. Note that the value entered for Report Repository Path in the Web Profile overrides any entry in the configuration.properties file.

See *PeopleTools: Portal Technology*, "Configuring Web Profiles."

Use the following formats to enter the name for the directory that you want to use for the ReportRepositoryPath. The examples below give the default values. Note that you must use a forward slash (/) in both cases:

- *Microsoft Windows*: ReportRepositoryPath=c:/psreports
- *UNIX*: ReportRepositoryPath=<user\_home>/PeopleSoft Internet Architecture/psreports

For <user\_home> substitute the home directory for the current user.

#### Defining the Report Node to Use HTTP/HTTPS

To define the report node to use HTTP/HTTPS:

1. Select PeopleTools, Process Scheduler, Report Nodes.
2. Select the Add a New Value link and enter the Report node name.

3. On the Report Node Definition page, select HTTP or HTTPS from the Protocol drop-down list.

Select the HTTP option if you are *not* using SSL. Select the HTTPS option if you are using SSL. The pages for HTTP and HTTPS have the same fields. These examples show HTTP.

Note that if you are using SSL you need to have Client Certificates installed on your web server.

The screenshot shows the Oracle Report Node Definition page for the HTTP protocol. The page is titled "Report Node Definition" and includes the following fields and sections:

- Node Name:** HTTP
- \*Protocol:** HTTP (dropdown menu)
- Validate:** Button
- Distribution Node Details:**
  - URLID:** http://<machine\_name>:<port\_number>/psreports/<site\_name>
  - Description:** (empty text box)
  - Operating System:** Windows (dropdown menu)
- Login Details:**
  - Login ID:** (empty text box)
  - Password:** (empty text box)
  - Confirm Password:** (empty text box)
- URL Details:**
  - URI Host:** <machine\_name>
  - URI Port:** 80
  - URI Resource:** SchedulerTransfer/<site\_name>

At the bottom of the page, there are buttons for Save, Return to Search, Notify, and Refresh.

Report Node Definition page for the HTTP protocol

4. Enter the following information in the Distribution Node Details area:

- **URLID:** Enter the URL of the web server using the following format:

`http://<machine_name>:<port_number>/psreports/<site_name>`

Replace `<machine_name>` with the name of your machine. Use the fully qualified host name for your web server. If you are using an HTTP or HTTPS port other than the defaults, you need to specify the port number.

**Note.** If you specify the Authentication Token Domain name during the PIA installation, you must include a fully qualified domain name for the URL instead of the IP address.

- **Description:** Enter a description of the server (optional).
- **Operating System:** Select the web server operating system, Windows or UNIX.

5. Enter the following information in the Login Details area:

- *Login ID*: Enter the Login ID. This is not required, unless basic authentication has been set up on the web server by the Web Administrator.
- *Password and Confirm Password*: Enter the password, and confirm it, for the user ID specified in the Login ID field. This is not required, unless basic authentication has been set up on the web server by the Web Administrator.

---

**Note.** The setup of authentication is optional, but is recommended for security of the Report Repository when using the HTTP to transfer files. For information on setting up authentication on the web server where the Report Repository resides, refer to the *PeopleTools: Security Administration* product documentation.

---

6. Enter the following information in the URI Details area:

- *URI Host*: Enter the machine name for the report repository.

---

**Note.** In a basic setup, the machine name for the report repository will match the machine name of the web server URL. However, under certain circumstances—for example, if you are using a reverse proxy server—the URL and URI Host may have different machine names.

---

- *URI Port*: Enter the port number, which must match the port number of your web server (defaults are HTTP = 80, HTTPS = 443). If you change a port number you will lose the default values for both protocols.
- *URI Resource*: Enter SchedulerTransfer/<site name>.

7. Click Save to save your entries.

8. Click Validate to confirm that your entries are complete and correct.

The validation confirms that the necessary parameters are present and correct, and simulates a file transfer with the entered information. You either see a message that confirms the success of the validation, or a message that displays an error for missing parameters or an unsuccessful transfer simulation.

9. To add additional report nodes, click Add to return to the Search page.

## Defining the Report Node to Use XCOPY

Both the Process Scheduler machine and the Report Repository machine must be Microsoft Windows machines for XCOPY to be used.

To define the report node to use XCOPY:

1. Select PeopleTools, Process Scheduler, Report Nodes.
2. Select Add a New Value, enter the Report node name, and click Add.

- On the Report Node Definition page, select XCOPY from the Protocol drop-down list.

The screenshot shows the Oracle Report Node Definition page. The breadcrumb trail is: Favorites > Main Menu > PeopleTools > Process Scheduler > Report Nodes. The Oracle logo is in the top left. A search bar contains 'All' and 'Search'. There are links for 'Advanced Search' and 'Last Search Results'. On the right, there are links for 'New Window', 'Help', and 'Personalize Page'. The main heading is 'Report Node Definition'. The form contains the following fields and buttons:

- Node Name:** XCOPY
- \*Protocol:** XCOPY (dropdown menu)
- Validate:** Button
- Distribution Node Details:** Section header
- URLID:** http://<machine\_name>:<port\_number>/psreports/<site\_name>
- Description:** (empty text box)
- Operating System:** Windows (dropdown menu)
- Network Path:** \\<machine\_name>\psreports
- Buttons:** Save, Notify, Refresh

Report Node Definition page for the XCOPY protocol

- Enter the following information in the Distribution Node Details area:

- URLID:** Enter the URL of the web server using this format:

`http://<machine_name>:<port_number>/psreports/<site_name>`

Replace *<machine name>* with the name of your web server. Replace *<site name>* with the directory where you installed the PIA files.

If you installed the web server software with the default TCP port of 80, you do not need to specify the port number in the URL path. However, if you installed the web server to some other port, you must specify the port number in the URL path.

- Description:** Enter an optional description for the node.
- Network Path:** Enter the path that points to your Report Repository share, using this format (where *<machine\_name>* refers to the web server machine):

`\\<machine_name>\psreports`

Make sure that this directory is shared with the login accounts used to start Process Scheduler. Use UNC format instead of mapped drive format.

- Select Save to save your entries.
- Click Validate to confirm that your entries are correct.

The validation confirms that the necessary parameters are present and correct, and simulates a file transfer with the entered information. You either see a message that confirms the success of the validation, or a message that displays an error for missing parameters or an unsuccessful transfer simulation.

- To add additional report nodes, select Add to return to the Search page.

## Defining the Report Node to Use FTP

If you use the FTP report node protocol, note that:

- If your FTP server is a Microsoft Windows server, you may have to set up the FTP service.
- The Distribution Agent will perform a validation after FTP has transferred files into the Report Repository by sending a query request to the web server. For this task to be completed, it is critical that the value entered in the URL is accurate. Verify that the machine name, port number, and site number that you specify are correct.

If this setup is not completed, the process request will get a status of NOT POSTED in the Process Monitor Detail page and will log the message "Unable to verify files posted."

To define the report node to use FTP:

1. Select PeopleTools, Process Scheduler, Report Nodes.
2. Select Add a New Value, enter the Report node name, and click Add.

- On the Report Node Definition page, select FTP from the Protocol drop-down list.

The screenshot shows the Oracle Report Node Definition page for the FTP protocol. The page is titled "Report Node Definition" and includes the following sections:

- Node Name:** FTP
- \*Protocol:** FTP (selected from a dropdown menu)
- Validate:** A button to validate the configuration.
- Distribution Node Details:**
  - URLID:** `http://<machine_name>:<port_number>/psreports/<site_name>`
  - Description:** FTP sample
  - Operating System:** Windows (selected from a dropdown menu)
  - Network Path:** (empty text field)
- Login Details:**
  - Login ID:** <user\_id>
  - Password:** (masked with dots)
  - Confirm Password:** (masked with dots)
- File Transfer Details:**
  - Home Directory:** \\<machine\_name>\psreports
  - FTP Address:** <machine\_name>
  - SSL Mode:** EXPLICIT (selected from a dropdown menu)
- Connection Properties:** A table with columns for Property Name and Property Value, and buttons for adding and removing properties.
- Password Encryption:**
  - Password:** (text field)
  - Confirm Password:** (text field)
  - Encrypt:** A button to encrypt the password.
  - Encrypted Password:** (text field)

At the bottom of the page, there are buttons for Save, Return to Search, Notify, and Refresh.

Report Node Definition page for the FTP protocol

- In the Distribution Node Details area, enter the following information:
  - URLID:** Enter the URL of the web server using this format:  
`http://<machine_name>:<port_number>/psreports/<site_name>`

Replace *<machine name>* with the name of your web server. If you are using an HTTP port other than 80, you need to specify the port number. The variable *<site name>* refers to the directory where you installed the PIA files; this will default to *ps* for the first installation.

---

**Note.** If you specify the Authentication Token Domain name during the PIA installation, you must include a fully qualified domain name for the URL instead of the IP address.

---

---

**Note.** If you installed the web server software with the default TCP port of 80, you do not need to specify the port number in the URL path. However, if you installed the web server to some other port, you must specify the port number in the URL path.

---

- *Description:* Enter a description of the server (optional).
  - *Operating System:* Select the operating system of the Report Repository, Windows or UNIX.
  - *Network Path:* This information is not required for the FTP protocol
5. In the Login Details area, enter the following information:
- *Login ID:* Enter the FTP User ID.
  - *Password and Confirm Password:* Enter the password, and enter it a second time, for the FTP User ID specified in the Login ID field.
6. In the File Transfer Details area, enter the following information:
- *Home Directory:* Enter the directory specified during the PIA installation as the Report Repository. The FTP User ID must have write access to this directory. Note that this is not a required field for FTP transfer, as the system uses the Report Repository directory specified at install time or the current directory assigned to ReportRepositoryPath in configuration.properties. Note that the value you enter for the Report Repository Path in the Web Profile at install time overrides any entry for ReportRepositoryPath in configuration.properties.
- For Microsoft Windows operating systems, the directory needs to match the Report Repository path. Make sure that you do not include any drive information—as in c:\psreports\—because you are using the FTP protocol to interpret this parameter.
- *FTP Address:* Enter the machine name or the IP address of the Report Repository. If the name of the machine is used, it must be included on a DNS server.



7. If you need to specify additional properties, use the Connection Properties area. Specifying the Connection Properties is optional.

Click the lookup button (magnifying glass) and select one of the properties in the following table. Click the plus sign to add another connection property.

| Property Name       | Property Value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ACTIVEMODE          | To enable active mode, add the ACTIVEMODE property to the URL and set it to <i>Y</i> .<br><br>The default FTP connection mode is extended passive mode.                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| ACTIVEPORTOPTION    | This property can be used along with ACTIVEMODE. When active mode is enabled, you can use ACTIVEPORTOPTION to specify the IP address and port on which the FTP server can be accessed. This is useful when the server is behind a firewall. By default, ACTIVEPORTOPTION uses the default IP address of your system. If you want to use a particular IP address, set the ACTIVEPORTOPTION value to either the full IP address, a host name to resolve to an IP address, or a local network interface name.<br><br>You can also specify a port range. For example:<br><i>10.176.147.111:10000-13000</i> |
| ENABLEEPRPRT        | This option can be used only with Active Mode. If Active Mode is enabled and ENABLEEPRPRT is set to <i>N</i> , then the system will use a PORT (IPv4) Active Mode connection.<br><br>By default, ENABLEEPRPRT is <i>Y</i> , if Active Mode is set to <i>Y</i> .                                                                                                                                                                                                                                                                                                                                        |
| EXTENDEDPASSIVEMODE | <ul style="list-style-type: none"> <li>• <i>0</i>: Disable EPSV</li> <li>• <i>1</i>: Enable EPSV</li> </ul> <p>This property enables you to control whether extended passive mode (EPSV) will be used by FTP.</p> <p>EPSV is used by default. That is, by default, this value is considered to be 1.</p> <p>If the client fails to connect to the server with EPSV, then the system will try passive mode (PASV). To use PASV only, add EXTENDEDPASSIVEMODE to the URL Properties and set it to 0.</p>                                                                                                 |
| JKSPASSWORD         | Specify the Java keystore (JKS) password.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| JKSPATH             | Specify the Java keystore (JKS) path.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| PASSWORD            | Specify the password associated with the USER property, which identifies the FTP User ID.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| USER                | Specify the FTP User ID used for authentication when accessing the FTP site.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

8. If you need to specify an encrypted password in any of the property fields, use the Password Encryption area to generate the encrypted password, as follows:
  - a. In the Password field, enter a password.
  - b. In the Confirm Password field, enter the password again.
  - c. Click Encrypt.  
The encrypted password is displayed in the Encrypted Password field.
  - d. From the Encrypted Password field, cut the encrypted password and then copy the encrypted value to the appropriate location.
9. Select Save to save your entries.
10. Click Validate to confirm that your entries are correct.  
The validation confirms that the necessary parameters are present and correct, and simulates a file transfer with the entered information. You either see a message that confirms the success of the validation, or a message that displays an error for missing parameters or an unsuccessful transfer simulation.
11. To add additional report nodes, click Add to return to the Search page.

## Defining the Report Node to Use FTPS

To define the report node to use FTPS:

1. Select PeopleTools, Process Scheduler, Report Nodes.
2. Select Add a New Value, enter the Report node name, and click Add.

- On the Report Node Definition page, select FTPS from the Protocol drop-down list.

The screenshot shows the Oracle Report Node Definition page for the FTPS protocol. The page is titled "Report Node Definition" and includes the following sections:

- Node Name:** FTPS
- \*Protocol:** FTPS (selected in a dropdown menu)
- Validate:** A button to validate the entered information.
- Distribution Node Details:**
  - URLID:** `http://<machine_name>:<port_number>/psreports/<site_name>`
  - Description:** FTPS sample
  - Operating System:** Windows (selected in a dropdown menu)
  - Network Path:** (empty text field)
- Login Details:**
  - Login ID:** <user\_id>
  - Password:** (masked with dots)
  - Confirm Password:** (masked with dots)
- File Transfer Details:**
  - Home Directory:** \\<machine\_name>\psreports
  - FTP Address:** <machine\_name>
  - SSL Mode:** EXPLICIT (selected in a dropdown menu)
- Connection Properties:** A table with columns for Property Name and Property Value.
- Password Encryption:**
  - Password:** (text field)
  - Confirm Password:** (text field)
  - Encrypt:** A button to encrypt the password.
  - Encrypted Password:** (text field)

At the bottom of the page, there are buttons for Save, Notify, and Refresh.

Report Node Definition page for the FTPS protocol

- In the Distribution Node Details area, enter the following information:
  - URLID:** Enter the URL of the web server using this format:  
`http://<machine_name>:<port_number>/psreports/<site_name>`

Replace *<machine name>* with the name of your web server. If you are using an HTTP port other than 80, you need to specify the port number. The variable *<site name>* refers to the directory where you installed the PIA files; this will default to *ps* for the first installation.

---

**Note.** If you specify the Authentication Token Domain name during the PIA installation, you must include a fully qualified domain name for the URL instead of the IP address.

---

---

**Note.** If you installed the web server software with the default TCP port of 80, you do not need to specify the port number in the URL path. However, if you installed the web server to some other port, you must specify the port number in the URL path.

---

- *Description:* Enter a description of the server (optional).
  - *Operating System:* Select the operating system of the Report Repository, Windows or UNIX.
  - *Network Path:* This information is not required for the FTPS protocol.
5. In the Login Details area, enter the following information:
- *Login ID:* Enter the FTP User ID.
  - *Password and Confirm Password:* Enter the password, and enter it a second time, for the user ID specified in the Login ID field.
6. In the File Transfer Details area, enter the following information:
- *Home Directory:* Enter the directory specified during the PIA installation as the Report Repository. The FTP User ID must have write access to this directory. Note that this is not a required field for FTP transfer, as the system uses the Report Repository directory specified at install time or the current directory assigned to ReportRepositoryPath in configuration.properties. Note that the value you enter for the Report Repository Path in the Web Profile at install time overrides any entry for ReportRepositoryPath in configuration.properties.

For Microsoft Windows operating systems, the directory needs to match the Report Repository path. Make sure that you do not include any drive information—as in c:\psreports\—because you are using the FTP protocol to interpret this parameter.

- *FTP Address:* Enter the machine name or the IP address of the Report Repository. If the name of the machine is used, it must be included on a DNS server.
- *SSL Mode:* Select Explicit or Implicit from the drop-down list.

These are two separate methods developed to invoke the client security for use with FTP clients. With the explicit mode, FTPS-aware clients can invoke security with an FTPS-aware server without breaking overall FTP functionality with non-FTPS-aware clients. The implicit method requires that all clients of the FTPS server be aware that SSL is to be used on the session, and thus is incompatible with non-FTPS-aware clients.

7. In the Connection Properties area, click the lookup button (magnifying glass) and select one of the properties in the following table:

Click the plus sign to add another connection property.

| Property Name       | Property Value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ACTIVEMODE          | To enable active mode, add the ACTIVEMODE property to the URL and set it to <i>Y</i> .<br><br>The default FTPS connection mode is extended passive mode.                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| ACTIVEPORTOPTION    | This property can be used along with ACTIVEMODE. When active mode is enabled, you can use ACTIVEPORTOPTION to specify the IP address and port on which the FTP server can be accessed. This is useful when the server is behind a firewall. By default, ACTIVEPORTOPTION uses the default IP address of your system. If you want to use a particular IP address, set the ACTIVEPORTOPTION value to either the full IP address, a host name to resolve to an IP address, or a local network interface name.<br><br>You can also specify a port range. For example:<br><i>10.176.147.111:10000-13000</i> |
| CERTALIAS           | Certificate Alias: The Certificate Alias must be an alias name of a certificate stored in the database (using the PeopleSoft PeopleTools Digital Certificates page).<br><br><b>Note.</b> Currently, only PEM certificates are supported for FTPS.                                                                                                                                                                                                                                                                                                                                                      |
| ENABLEEPRPT         | This option can be used only with Active Mode. If Active Mode is enabled and ENABLEEPRPT is set to <i>N</i> , then the system will use a PORT (IPv4) Active Mode connection.<br><br>By default, ENABLEEPRPT is <i>Y</i> , if Active Mode is set to <i>Y</i> .                                                                                                                                                                                                                                                                                                                                          |
| EXTENDEDPASSIVEMODE | <ul style="list-style-type: none"> <li>• <i>0</i>: Disable EPSV</li> <li>• <i>1</i>: Enable EPSV</li> </ul> <p>This property enables you to control whether extended passive mode (EPSV) will be used by FTP.</p> <p>EPSV is used by default. That is, by default, this value is considered to be 1.</p> <p>If the client fails to connect to the server with EPSV, then the system will try passive mode (PASV). To use PASV only, add EXTENDEDPASSIVEMODE to the URL Properties and set it to 0.</p>                                                                                                 |
| JKSPASSWORD         | Specify the Java keystore (JKS) password.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| JKSPATH             | Specify the Java keystore (JKS) user.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

| Property Name    | Property Value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| KEYSTOREPASSWORD | <p>This property is required for FTPS and HTTPS repositories. For attachments transferred from the PeopleSoft system to the FTPS or HTTPS repository, the system retrieves the key pair for the client certificate from the digital certificate store and writes the pair to a file in PKCS12 format with password protection. The value of this property will be used as the password for the PKCS12 file.</p> <p>The PKCS12 file enables connection and file transfer, and it exists only temporarily in &lt;PS_SERVDIR&gt;\files\&lt;CERT ALIAS NAME&gt; for the duration of the file transfer. The system deletes the file after the file transfer transaction.</p> <p><b>Note.</b> If the system fails to delete the certificate alias file, a message will be written to the application server log. The maximum number of files that can exist at any time is equal to the total number of FTPS and HTTPS URL identifiers defined in the system.</p> <p>For information on setting the PS_SERVDIR environment variable, see the <i>PeopleTools: Integration Broker</i> product documentation.</p> |
| PASSWORD         | Specify the password associated with the USER property, which identifies the FTP User ID.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| SSLUAGELEVEL     | <ul style="list-style-type: none"> <li>• <i>0 - No SSL:</i> No SSL will be used.</li> <li>• <i>1 - Try SSL:</i> Try using SSL, but proceed as normal otherwise.</li> <li>• <i>2 - Control:</i> Require SSL for the control connection.</li> <li>• <i>3 - SSL Only:</i> (Default) Require SSL for all communication.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| USER             | Specify the FTP User ID used for authentication when accessing the FTP site.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| VERIFYHOST       | <ul style="list-style-type: none"> <li>• <i>0:</i> Do not verify the server for host name.</li> <li>• <i>1:</i> Check if there exists any value in the common name field in the server certificate. This check does not verify if it matches with what the client specifies.</li> <li>• <i>2:</i> (Default) Check for a match with the host name in the URL with the common name or Subject Alternate field in the server certificate.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| VERIFYPEER       | <ul style="list-style-type: none"> <li>• <i>False:</i> Do not verify the peer.</li> <li>• <i>True:</i> (Default) Verify the peer by authenticating the certificate sent by the server.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

8. If you need to specify an encrypted password in any of the property fields, use the Password Encryption area to generate the encrypted password, as follows:

- a. In the Password field, enter a password.
- b. In the Confirm Password field, enter the password again.
- c. Click Encrypt.

The encrypted password is displayed in the Encrypted Password field.

- d. From the Encrypted Password field, cut the encrypted password and then copy the encrypted value to the appropriate location.
9. Select Save to save your entries.
  10. Click Validate to confirm that your entries are correct.

The validation confirms that the necessary parameters are present and correct, and simulates a file transfer with the entered information. You either see a message that confirms the success of the validation, or a message that displays an error for missing parameters or an unsuccessful transfer simulation.

11. To add additional report nodes, click Add to return to the Search page.

## Defining the Report Node to Use SFTP

To define the report node to use SFTP:

1. Select PeopleTools, Process Scheduler, Report Nodes.
2. Select Add a New Value, enter the Report node name, and click Add.

- On the Report Node Definition page, select SFTP from the Protocol drop-down list.

Report Node Definition

Node Name: SFTP  
 \*Protocol: SFTP [Validate]

**Distribution Node Details**

URLID: http://<machine\_name>:<port\_number>/psreports/<site\_name>  
 Description: SFTP sample  
 Operating System: Windows

**Login Details**

Login ID: <user\_id>  
 Password: ..... Confirm Password: .....

**File Transfer Details**

Home Directory: \\<machine\_name>\psreports  
 FTP Address: <machine\_name>

**Connection Properties**

| Property Name | Property Value |   |   |
|---------------|----------------|---|---|
|               |                | + | - |

**▼ Password Encryption**

Password: ..... Confirm Password: .....  
 [Encrypt] Encrypted Password: .....

[Save] [Notify] [Refresh]

Report Node Definition page for the SFTP protocol

- In the Distribution Node Details area, enter the following information:
  - URLID:** Enter the URL of the web server using this format:  
`http://<machine_name>:<port_number>/psreports/<site_name>`

Replace *<machine name>* with the name of your web server. If you are using an HTTP port other than 80, you need to specify the port number. The variable *<site name>* refers to the directory where you installed the PIA files; this will default to ps for the first installation.



---

**Note.** If you specify the Authentication Token Domain name during the PIA installation, you must include a fully qualified domain name for the URL instead of the IP address.

---

---

**Note.** If you installed the web server software with the default TCP port of 80, you do not need to specify the port number in the URL path. However, if you installed the web server to some other port, you must specify the port number in the URL path.

---

- *Description:* Enter a description of the server (optional).
  - *Operating System:* Select the operating system of the Report Repository, Windows or UNIX.
  - *Network Path:* This information is not required for the SFTP protocol.
5. In the Login Details area, enter the following information:
- *Login ID:* Enter the FTP User ID.
  - *Password and Confirm Password:* Enter the password, and enter it a second time, for the user ID specified in the Login ID field.
6. In the File Transfer Details area, enter the following information:
- *Home Directory:* Enter the directory specified during the PIA installation as the Report Repository. The FTP User ID must have write access to this directory. Note that this is not a required field for FTP transfer, as the system uses the Report Repository directory specified at install time or the current directory assigned to ReportRepositoryPath in configuration.properties. Note that the value you enter for the Report Repository Path in the Web Profile at install time overrides any entry for ReportRepositoryPath in configuration.properties.  
  
For Microsoft Windows operating systems, the directory needs to match the Report Repository path. Make sure that you do not include any drive information—as in c:\psreports\—because you are using the FTP protocol to interpret this parameter.
  - *FTP Address:* Enter the machine name or the IP address of the Report Repository. If the name of the machine is used, it must be included on a DNS server.

7. In the Connection Properties area, click the lookup button (magnifying glass) and select one of the properties in the following table.

Click the plus sign to add additional connection properties.

| Property Name | Property Value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AUTHTYPE      | Select one of the following the authentication types: <ul style="list-style-type: none"> <li>• <i>PUBLICKEY</i></li> <li>• <i>PASSWORD</i></li> <li>• <i>ANY</i></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| PASSWORD      | Specify the user password. You can enter the password in the Password Encryption box, click Encrypt, and then copy the encrypted value to the Password property.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| PASSWORDKEY   | Enter the password for the private key.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| PRIVATEKEY    | Select the private key.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| PUBLICKEY     | Select the public key.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| SSHKEYALIAS   | Select the SSH certificate saved to the database using the PeopleTools Security, Digital Certificates page (select PeopleTools, Security, Security Objects, Digital Certificates). The SSH certificate added through the Digital Certificates page contains both the public and private key data, identified by the Alias column value on the Digital Certificates page.<br><br>If using the SSHKEYALIAS URL property, the Property Value prompt displays only the list of SSH certificates that have been added to the Digital Certificates page. If you have added the SSH certificate using the Digital Certificates page, and you have assigned an SSH certificate to the SSHKEYALIAS URL property, the system ignores the PUBLICKEY and PRIVATEKEY properties, regardless of whether they refer to valid key files in the file system.<br><br>If you provided a password (or passphrase) when generating your SSH certificate, specify that value using the PASSWORDKEY URL property.<br><br>See <i>PeopleTools: Security Administration</i> , "Configuring Digital Certificates." |
| USER          | Specify the user ID to be authenticated.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

8. If you need to specify an encrypted password in any of the property fields, use the Password Encryption area to generate the encrypted password, as follows:
- In the Password field, enter a password.
  - In the Confirm Password field, enter the password again.
  - Click Encrypt.

The encrypted password is displayed in the Encrypted Password field.

- d. From the Encrypted Password field, cut the encrypted password and then copy the encrypted value to the appropriate location.
9. Select Save to save your entries.
10. Click Validate to confirm that your entries are correct.

The validation confirms that the necessary parameters are present and correct, and simulates a file transfer with the entered information. You either see a message that confirms the success of the validation, or a message that displays an error for missing parameters or an unsuccessful transfer simulation.

11. To add additional report nodes, click Add to return to the Search page.

## Task 10A-3-5: Setting Up the Distribution for Your Process Scheduler Server

To set up the Distribution Settings for your Process Scheduler Server:

1. Select PeopleTools, Process Scheduler, Servers.
2. Enter the Server Name (such as PSNT). The Server Definition page appears.
3. Select the Distribution tab.

The screenshot shows the Oracle PeopleTools interface for the 'Servers' page. The breadcrumb trail is 'Favorites > Main Menu > PeopleTools > Process Scheduler > Servers'. The Oracle logo and search bar are at the top. Below the search bar are links for 'New Window', 'Help', and 'Personalize Page'. The 'Server Definition' tab is selected, and the 'Distribution' sub-tab is active. The 'Server Name' is 'PSNT'. The 'Server Distribution Details' section contains the following fields: 'Distribution Node Name' with a search icon, 'Maximum Transfer Retries' (empty), 'Interval for Transfer Attempt' (empty) with 'seconds' next to it, and 'Transfer System Files to Report Repository' (checkbox). At the bottom are buttons for 'Save', 'Return to Search', 'Notify', 'Add', and 'Update/Display'. A breadcrumb trail at the bottom of the form reads 'Server Definition | Distribution | Operation | Notification | Daemon'.

Server Definition page for PSNT: Distribution tab

4. Click the lookup button for Distribution Node Name to display the report node names and select the name of the required report node.
5. Enter a number for the Maximum Transfer Retries. This is the maximum number of times the server can try to send a report before it errors out.
6. Enter the number of seconds for the Interval for Transfer Attempt field. This is the interval between attempts to send the report.

7. Select the check box Transfer Log Files to Report Repository if you want to transfer all log and trace files from processes that do not generate reports.
8. Click Save to save your entries.
9. If Process Scheduler is running, you must reboot for any new settings to take effect.

To view reports (log files or system files) from Report Repository, you need to pass the authentication. Report Repository should be treated as a separate PeopleSoft application. To navigate from PIA to Report Repository, you need to set up single signon in order to avoid getting a prompt for a second signon.

## **Task 10A-3-6: Setting Up Sending and Receiving of Report Folders in the Report Manager**

To be able to view reports in the Report Manager Explorer and List pages, you need to set up the sending and receiving of report folders in the Report Manager by activating the domain on which a sending and receiving server resides. Consult the documentation covering the PeopleSoft Integration Broker to learn how to activate the sending and receiving server domain.

See *PeopleTools: Integration Broker*.

See *PeopleTools: Integration Broker Service Operations Monitor*.

## **Task 10A-4: Setting Environment Variables**

---

To set the appropriate Tuxedo environment variables, carry out these steps. (If you have already set these variables on the machine you are using as your Process Scheduler Server, you can skip this task.)

See "Installing Additional Components," Installing Oracle Tuxedo on Microsoft Windows.

To set the variables:

1. Choose Start, Settings, Control Panel.
2. Double-click the System icon.
3. Make sure that the NLSPATH environment variable is set.

NLSPATH does not need to be explicitly set since Oracle Tuxedo sets NLSPATH in its own registry tree. This value can be displayed using Control Panel, Tuxedo, on the Environment tab. However, the installation of certain products, such as IBM DB2 connectivity (DB2 for z/OS and DB2 for Linux, UNIX, and Windows) sets NLSPATH to a value that causes Oracle Tuxedo to fail. The solution is to either set NLSPATH=c:\tuxedo\locale\c, or to delete it entirely and let Oracle Tuxedo pick up the value from its registry tree. If you are running DB2 for Linux, UNIX, and Windows, the solution instead is to append the c:\tuxedo\locale\c directory in the NLSPATH directory.

Search the Oracle Tuxedo documentation for additional information on NLSPATH.

## **Task 10A-5: Setting Up Process Scheduler Server Agent**

---

This section discusses:

- Understanding Process Scheduler Server Agent
- Creating and Configuring a Process Scheduler Server
- Reconfiguring a Process Scheduler Server

- Verifying the Process Scheduler Server Status

## Understanding Process Scheduler Server Agent

For installation purposes, you can use predefined server names and other definitions. The predefined name that you might use is as follows:

| Server Name | Operating System  |
|-------------|-------------------|
| PSNT        | Microsoft Windows |

To test this, use processes already defined in your PeopleSoft database. To set up a new server definition in your PeopleSoft database, refer to the *PeopleTools: Process Scheduler* product documentation.

**Note.** When creating multiple Process Scheduler Servers for the same database, each server must have a unique server name. For example, two Process Scheduler Servers, both named PSNT, cannot run against the same database.

## Task 10A-5-1: Creating and Configuring a Process Scheduler Server

This section describes how to create and configure a Process Scheduler server.

You can set Process Scheduler configuration parameters either by using PSADMIN, which provides an interactive dialog, or by editing the configuration file `psprcs.cfg` located in the `PS_CFG_HOME\appserv\prcs\database name` directory. The following steps assume you are using PSADMIN to specify parameter settings.

**Note.** For Cube Builder users, if Essbase Server is installed on a different machine than the Process Scheduler, you must install Essbase Client 11.1.2.1 on the process scheduler server machine. You must also ensure that the `%ESSBASEPATH%` and `%ARBORPATH%` environmental variables are properly set in the Process Scheduler.

**Note.** If you use the configuration file `psprcs.cfg`, be aware that in the PeopleSoft PeopleTools 8.49 release and later, the section [Output Dest Exceptions] has been modified to trap metastring exceptions not only in the output destination but in other process parameters as well. In this section the entry `OUTDEST_EXCEPT01=%ANYMETASTRING%` has been changed to `PARAMETER_EXCEPT01=%ANYMETASTRING%`.

To create and configure a Process Scheduler Server:

1. From `PS_HOME\appserv` on the batch server, type `psadmin`.

You see the PeopleSoft Server Administration menu, as in this example:

```

-----
PeopleSoft Server Administration
-----
PS_CONFIG_HOME      C:\User\JSMITH\psft\pt\8.56
PS_HOME             C:\PT8.56
PS_APP_HOME         C:\HC9.2

```

- 1) Application Server
- 2) Process Scheduler
- 3) Search Server
- 4) Web (PIA) Server

- 5) Switch Config Home
- 6) Service Setup
- 7) Replicate Config Home
- 8) Refresh Config Home
- q) Quit

Command to execute (1-8 q):

2. Depending on your environment, you may see a message after the menu selection, which indicates that PSADMIN has modified the *PS\_CFG\_HOME*/peopletools.properties file with the current *PS\_HOME* location:

```
*****
PS_CFG_HOME/peopletools.properties file has been updated.
You should use the Config Home Refresh feature in PSAdmin
to ensure that all of your domains are current.
Alternatively, you may recreate all of your domains.
Please press any key to continue...
*****
```

This indicates that one of these situations exists:

- The *PS\_CFG\_HOME* that you are working with was used previously from a different *PS\_HOME*. In this case, you should recreate any existing Application Server, Process Scheduler, Search, or PIA domains in this *PS\_CFG\_HOME*.
- You configured your environment such that *PS\_CFG\_HOME* is the same as *PS\_HOME*. The first time you use PSADMIN to create a domain, it updates the *PS\_CFG\_HOME*/peopletools.properties file. Continue with the next step.

3. Select 2 to access the Process Scheduler submenus.
4. Select 2 for Create a domain from the PeopleSoft Process Scheduler Administration menu.

```
-----
PeopleSoft Process Scheduler Administration
-----
1) Administer a domain
2) Create a domain
3) Delete a domain
4) Import domain configuration

q) Quit
```

Command to execute (1-4, q) : **2**

5. Enter the name of the domain at the following prompt, such as HRDMO in this example, and press ENTER:

Please enter name of domain to create : **HRDMO**

6. After the system creates the domain, the Quick-configure menu appears:

```
-----
Quick-configure menu -- domain: HRDMO
-----

      Features                               Settings
      =====                               =====
1) App Engine       : Yes      9) DBNAME          : [HRDMO]
2) Master Scheduler : Yes     10) DBTYPE         : [DB2UNIX]
```

```

3) Perf Collator      : No      11) PrcsServer : [PSNT]
4) Domains Gateway   : No      12) UserId      : [PS]
5) Push Notifications: No      13) UserPswd   : []
                                14) ConnectID  : [people]
                                15) ConnectPswd: []
                                16) Log/Output Dir: [%PS_SERVDIR%\log_⇒
output]
                                17) SQRBIN        : [%PS_HOME%\bin\sqr\DB2⇒
\binw]
                                18) AddToPATH     : [%WINDIR%;%WINDIR%⇒
\SYSTEM32]
                                19) DBBIN         : [C:\<connectivity⇒
directory>]
                                20) DomainConnectPswd: []

    Actions
    =====
6) Load config as shown
7) Custom configuration
8) Edit environment settings
h) Help for this menu
q) Return to previous menu

HINT: Enter 9 to edit DBNAME, then 6 to load

Enter selection (1-20, h, or q):

```

7. If you need to modify any of these settings, enter the number next to the parameter name, type the new value, and press ENTER. This table lists the parameters and gives brief descriptions.

| Parameter                 | Description                                                                                                                                                                                                                                                                                                                                             |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Master Scheduler          | Select this option to enable the Master Scheduler Server (PSMSTPRC). The default is to enable the server.<br><br>See <i>PeopleTools: Process Scheduler</i> .                                                                                                                                                                                            |
| App Engine                | Select this option to initiate Application Engine programs through the AE Tuxedo Server (PSAESRV). The default is set to run AE using PSAESRV.<br><br>See <i>PeopleTools: Process Scheduler</i> .                                                                                                                                                       |
| Perf Collator             | Select this option to enable the PSPPMSRV server process.<br><br>See <i>PeopleTools: Performance Monitor</i> , "Enabling the Required Elements on the Monitoring System."                                                                                                                                                                               |
| Domain Gateways           | Select this option to enables inter domain communication, for example between Application Server and Process Scheduler domains.<br><br>See <i>PeopleTools: Fluid User Interface Developer's Guide</i> , "Setting Up Push Notification Configurations."                                                                                                  |
| Push Notifications        | Select this option to enables pushing server events from PeopleSoft PeopleTools server runtime, such as Application Server and Process Scheduler, to browser clients and other PeopleSoft PeopleTools server runtime components.<br><br>See <i>PeopleTools: Fluid User Interface Developer's Guide</i> , "Setting Up Push Notification Configurations." |
| Load config as shown      | Load the selections you made in the Quick Configure menu.                                                                                                                                                                                                                                                                                               |
| Custom configuration      | Make custom selections in PSADMIN, using options that are not available in the Quick Configure menu.                                                                                                                                                                                                                                                    |
| Edit environment settings | Edit, add, remove, comment out, and review domain-level environment variables.                                                                                                                                                                                                                                                                          |
| DBNAME                    | Specify the database name that is associated with a PeopleSoft Process Scheduler Server Agent, such as HRDMO, FSDMO, SADMO, and so on.                                                                                                                                                                                                                  |
| DBTYPE                    | Specify the database type: DB2UNIX (for DB2 for Linux, UNIX, and Windows).                                                                                                                                                                                                                                                                              |
| PrCsServer                | Specify the process server name. This must match the name defined in the Server Definition table, such as <i>PSNT</i> or <i>PSUNX</i> .                                                                                                                                                                                                                 |



| Parameter         | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| UserId            | Enter the user ID, such as VP1 or PS.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| UserPswd          | Enter the password for the user ID, as you specified during the database configuration.<br><br>The password is hidden by masking characters as you type, in the Quick-configure menu after entry.                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| ConnectID         | Enter the connect ID. This value is required.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| ConnectPswd       | Enter the connect password, as you specified during the database configuration. This value is required.<br><br>The password is hidden by masking characters as you type, in the Quick-configure menu after entry.                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Log/Output Dir    | Specify the directory in which files that are generated by the program are written. When PeopleSoft Process Scheduler initiates a process request, it creates a subdirectory in the format <Process Type ID>_<Program Name>_<Process Instance> that contains the generated files. For instance, the SQR program XRFWIN that ran with process instance 20 has all reports, trace, and log files in the subdirectory SQR_XRFWIN_20. It is also the optional directory used with the Output Destination field when scheduling a request. This variable (%%OutputDirectory%%) can be used in the File/Printer field of the Process Scheduler Request dialog box. |
| SQRBIN            | Enter the path to the SQR executables.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| AddToPATH         | (Optional for Tuxedo) Specify an additional directory that is appended to the PATH environment variable.<br><br>For a DB2 LUW installation, specify the 64-bit connectivity software. For example, c:\sqlib\bin.<br><br><b>Note.</b> If the PATH environment variable already includes the database connectivity location, you do not need to change the setting for AddToPATH.                                                                                                                                                                                                                                                                              |
| DBBIN             | Enter the path to the database drivers; that is, your connectivity software.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| DomainConnectPswd | If you configured your Application Server domain to require a Domain Connection password, enter it here. Otherwise, leave it blank.<br><br>The password is hidden by masking characters as you type, and in the Quick-configure menu after entry.<br><br>See the information on setting Application Server Domain Parameters in the <i>PeopleTools: System and Server Administration</i> product documentation.                                                                                                                                                                                                                                              |

For descriptions of the PSADMIN options that do not appear in the Quick-configure menu, see the information on using PSADMIN in the *PeopleTools: Process Scheduler* product documentation. For a basic installation, in most cases you can accept the defaults.

8. When you have updated the settings as needed, choose *5, Load config as shown*, from the Quick-Configure menu to save your settings to the Process Scheduler configuration file, pstuxcfg.
9. To start Process Scheduler, choose *1, for Administer Domain*.
10. On the PeopleSoft Process Scheduler Administration menu, choose *1* for Boot this domain.

```
-----
PeopleSoft Process Scheduler Administration
-----
```

Domain Name: HRDMO

- 1) Boot this domain
- 2) Domain shutdown menu
- 3) Domain status menu
- 4) Configure this domain
- 5) TUXEDO command line (tmadmin)
- 6) Edit configuration/log files menu
- 7) Clean IPC resources of this domain
- q) Quit

Command to execute (1-7, q) :

11. Choose *1, Boot (Serial Boot)*, or *2, Parallel Boot*, from the PeopleSoft Domain Boot Menu.

---

**Note.** The messages you see and the number of processes started will depend on the options you chose during configuration.

---

12. If you want to stop Process Scheduler Server, from the PeopleSoft Domain Administration menu, choose *2, for Domain Shutdown menu*, and then enter the number corresponding to the name of the appropriate database.

---

**Note.** If you see the following message, then the server is already down:

```
Command to execute (1-2, q) [q]: 1 Loading command line administration
utility ... tmadmin - Copyright (c) 2007-2008, Oracle. Portions *
Copyright 1986-1997 RSA Data Security, Inc. All Rights Reserved.
Distributed under license by Oracle. Tuxedo is a registered trademark. No
bulletin board exists. Entering boot mode. > TMADMIN_CAT:111: ERROR: No
such command.
```

---

## Task 10A-5-2: Reconfiguring a Process Scheduler Server

If you create and then immediately configure a Process Scheduler server, you can use the Quick-configure menu. Alternatively, you can use PSADMIN as described in this section. Feel free to skip this procedure if you have already created and configured your Process Scheduler Server using the Quick-configure menu and want to move forward with your installation.

---

**Note.** If you want to configure the Process Scheduler Server while it is running, you need to stop and restart the server to load the new settings.

---

To reconfigure a Process Scheduler Server:

1. Go to *PS\_HOME*\appserv and enter:

```
psadmin
```

2. Depending on your environment, you may see a message after the initial menu, which indicates that PSADMIN has modified the *PS\_CFG\_HOME*/peopletools.properties file with the current *PS\_HOME* location:

```
*****
PS_CFG_HOME/peopletools.properties file has been updated.
You should use the Config Home Refresh feature in PSAdmin
to ensure that all of your domains are current.
Alternatively, you may recreate all of your domains.
Please press any key to continue...
*****
```

This indicates that one of these situations exists:

- The *PS\_CFG\_HOME* that you are working with was used previously from a different *PS\_HOME*. In this case, you should recreate any existing Application Server, Process Scheduler, Search, or PIA domains in this *PS\_CFG\_HOME*.
  - You configured your environment such that *PS\_CFG\_HOME* is the same as *PS\_HOME*. The first time you use PSADMIN to create a domain, it updates the *PS\_CFG\_HOME*/peopletools.properties file. Continue with the next step.
3. Select 2 for Process Scheduler in the PeopleSoft Server Administration menu.
  4. In the PeopleSoft Process Scheduler Administration menu, select 1 for Administer a domain.
  5. Select the database for which the Process Scheduler needs to be configured.
  6. You see the following prompt:

```
Do you want to change any config values (y/n)? [n]:
```

Specify y to start an interactive dialog that lets you examine or change parameter values.

7. Specify the configuration parameters one by one.

Configuration parameters are grouped into sections. At each section, you are asked whether to change any parameters—for example:

```
Values for config section - Startup
```

```
DBName=
DBType=
UserId=
UserPswd=
ConnectId=
ConnectPswd=
ServerName=
StandbyDBName=
StandbyDBType=
StandbyUserId=
StandbyUserPswd=
InMemoryDBName=
InMemoryDBType=
```

```
Do you want to change any values (y/n)? [n]:
```

- Specify y to change any parameter values for the current section. You are prompted for each parameter

value. Either specify a new value or press ENTER to accept the default. After you press ENTER, you are positioned at the next parameter in that section. When you are done with that section, you are again asked whether you want to re-edit any of the values you changed.

- The parameters StandbyDBName, StandbyDBType, StandbyUserID, and StandbyUserPswd are used for a standby database in an Oracle database environment.

See the information on implementing Oracle Active Data Guard in the *PeopleTools: Data Management*, product documentation.

- The parameters InMemoryDBName and InMemoryDBType are reserved for internal use.
- If you do not want to change any values, specify *n* and you are prompted for the next configuration section.

8. After you have selected all your parameters, you see this message:

```
You will need to shut down and start up the server to read the new=>
settings.
```

For descriptions of the Process Scheduler options in the PSADMIN, see the *PeopleTools: Process Scheduler* product documentation. In most cases you can accept the defaults.

### Task 10A-5-3: Verifying the Process Scheduler Server Status

At this stage it is a good idea to verify the Process Scheduler Server status.

To verify the Process Scheduler Server status:

1. From the PeopleSoft Process Scheduler Administration menu, choose option 3, for Domain status menu.

```
-----
PeopleSoft Process Scheduler Administration
-----
```

```
Domain Name: HRDMO
```

- ```
1) Boot this domain
2) Domain shutdown menu
3) Domain status menu
4) Configure this domain
5) TUXEDO command line (tmadmin)
6) Edit configuration/log files menu
7) Clean IPC resources of this domain
q) Quit
```

```
Command to execute (1-7, q) : 3
```

2. To verify the status of the Process Scheduler Server for a specific database, type the number corresponding to the appropriate database.

For example:

```
Database list:
```

- ```
1) HRDMO
```

```
Select item number to start: 1
```

```

Loading command line administration utility ...
tmadmin - Copyright (c) 2007-2008 Oracle.
Portions * Copyright 1986-1997 RSA Data Security, Inc.
All Rights Reserved.
Distributed under license by Oracle.
Tuxedo is a registered trademark.

```

```

> Prog Name      Queue Name  Grp Name      ID RqDone Load Done Current=>
  Service
-----
-----
-----
-----
BBL.exe          46845      PSSERVER+     0      9      450 ( IDLE )
PSMONITORSRV.e  MONITOR    MONITOR       1      0      0 ( IDLE )
PSAESRV.exe     00101.00001 AESRV         1      0      0 ( IDLE )
PSAESRV.exe     00101.00002 AESRV         2      0      0 ( IDLE )
PSAESRV.exe     00101.00003 AESRV         3      0      0 ( IDLE )
PSPRCSRV.exe    SCHEDQ     BASE          101    0      0 ( IDLE )
PSMSTPRC.exe    MSTRSCHQ   BASE          102    0      0 ( IDLE )
PSDSTSRV.exe    DSTQ       BASE          103    0      0 ( IDLE )
>

```

You can also verify the status of the Process Scheduler Server from Process Monitor in PeopleSoft Pure Internet Architecture. To verify the Process Scheduler Server status from the Process Monitor page, go to PeopleTools, Process Scheduler, Process Monitor, and select *Server List*.

If the user has the process security rights to update the server status, the *Refresh* button can be used to refresh the screen, too.

See Setting Up Process Scheduler Security.

This example of the Server List page shows two Process Scheduler servers with status Down, and one with status Running.

| Process List                           |          | Server List           |           |        |         |            |        |         |                         |  |
|----------------------------------------|----------|-----------------------|-----------|--------|---------|------------|--------|---------|-------------------------|--|
| <input type="button" value="Refresh"/> |          |                       |           |        |         |            |        |         |                         |  |
| Server                                 | Hostname | Last Update Date/Time | Dist Node | Master | CPU (%) | Memory (%) | Active | Status  | Details                 |  |
| <a href="#">PSNT</a>                   | PTLAB95  | 10/28/2003 9:53:33AM  | https     | N      | 1       | 29         | 0      | Down    | <a href="#">Details</a> |  |
| <a href="#">QEPSNT2</a>                | PTLAB95  | 10/28/2003 9:53:45AM  | https     | N      | 1       | 29         | 0      | Down    | <a href="#">Details</a> |  |
| <a href="#">QE HPX1</a>                | pt-hp07  | 10/28/2003 10:05:47AM | https     | Y      | 21      | 34         | 1      | Running | <a href="#">Details</a> |  |

Process Monitor page: Server List tab

## Task 10A-6: Starting Process Scheduler as a Windows Service (Optional)

You can start the Process Scheduler server as a Windows service. This means that administrators do not need to manually boot each Process Scheduler server that runs on a Microsoft Windows machine. Instead, each time you boot the Microsoft Windows server where the Process Scheduler server resides, the Process Scheduler Server will boot automatically. You can also still manually boot Process Scheduler Servers on your Microsoft Windows server.

---

**Note.** If you have set up TUXDIR and TEMP as new SYSTEM variables, you need to reboot your machine before any Windows services will pick up the value of these environment variables.

---

**Note.** You can also set up application servers and search servers as a Windows service using the instructions provided here.

---

The following directions assume that the Process Scheduler is already configured on the Microsoft Windows server.

To set up the Windows Service for a Process Scheduler Server:

1. Open the System utility within the Control Panel, and set the variables, listed with a brief explanation in the following table, in the System Variables section of the Environment tab.

---

**Note.** Even if the following variables are in the User Variables section, they must also be in the System Variables section because the Windows service will be started under the System Account.

---

| Variable | Value                                                                                |
|----------|--------------------------------------------------------------------------------------|
| TEMP     | Specify the location of the TEMP directory on the Windows server, as in C:\TEMP.     |
| TUXDIR   | Specify the location of the Tuxedo directory on the Windows server, as in C:\tuxedo. |

2. Reboot the Windows computer if any changes or additions were made for the system variables.
3. Run the PeopleSoft PSADMIN utility (psadmin.exe in the *PS\_HOME*\appserv directory), and press ENTER.
4. Select 6 for Service Setup from the PeopleSoft Server Administration menu.

```

-----
PeopleSoft Server Administration
-----
PS_CFG_HOME           C:\Users\JSMITH\psftuser\psft\pt\8.56
PS_HOME               C:\PT8.56
PS_APP_HOME           C:\HC9.2

```

- ```

1) Application Server
2) Process Scheduler
3) Search Server
4) Web (PIA) Server
5) Switch Config Home
6) Service Setup
7) Replicate Config Home
8) Refresh Config Home
q) Quit

```

Command to execute (1-8, q): 6

5. Select 1 from the PeopleSoft Services Administration menu.

```

-----
PeopleSoft Services Administration
-----

```

- 1) Configure Windows Service
- 2) Install Windows Service
- 3) Delete Windows Service
- 4) Edit Service Configuration File
- q) Quit

Command to execute (1-4, q) : **1**

When asked if you want to change configuration values, enter y.

6. Enter the name of the Process Scheduler databases that you intend to include as part of the Windows service.

Values for config section - NT Services

```
Service Start Delay=60
Application Server Domains=HRDMO
Process Scheduler Databases=HRDMO
Search Server Domains=HRDMO
```

Do you want to change any values (y/n)? [n]:

If you specify more than one Process Scheduler database, separate each entry with a comma.

---

**Note.** You can use PSADMIN to set up Process Scheduler Servers, application servers, or search servers as a Windows service. The Windows Service psntrsv.exe automatically starts application servers, Process Scheduler servers, and search servers that reside on the same Microsoft Windows machine. Occasionally, psntrsv.exe would attempt to initiate a connection between an application server, Process Scheduler server, or search server and a database on the same machine that was not ready to receive requests. As a result the connection would fail. When you set up these servers as a Windows Service, you can specify a Service Start Delay, in seconds, that elapses before a service attempts to start any application server domains, Process Scheduler servers, or search servers. This allows the RDBMS to boot and become available to accept requests. The default setting for the Service Start Delay parameter is 60 seconds.

---



---

**Note.** The NT Services section of the PSADMIN modifies the psntrsv.cfg file located in the *PS\_CFG\_HOME*\appserv directory. You can edit this file manually by selecting *4, Edit Service Configuration File* from the PeopleSoft Services Administration menu. If you edit it, you need to delete and then install the service again.

---

7. Select option 2 from the PeopleSoft Services Administration menu.

```
-----
PeopleSoft Services Administration
-----
1) Configure Windows Service
2) Install Windows Service
3) Delete Windows Service
4) Edit Service Configuration File
q) Quit
```

Command to execute (1-4, q) : **2**

8. Return to the Control Panel, choose *Administrative Tools*, and launch the Services utility.
9. On the Services dialog, scroll to find the entry that adheres to the following naming convention, and select it:  
PeopleSoft <PS\_CFG\_HOME>

For example:

PeopleSoft C:\Users\JSMITH\psftuser\psft\pt\8.56

---

**Note.** The default Startup mode is Manual.

---

10. Click *Startup*.
  11. On the Service dialog in the Startup Type group, select *Automatic*, and in the Log On As group, select *Local System Account*. Then click OK.
- 

**Note.** The *Log On As* setting needs to reflect that which you set for your ORACLE ProcMGR V12.1.3.0.0\_VS2012 and Tlisten processes. Oracle recommends that you set these services to *Local System Account* when you install Tuxedo. The *Log On As* value only affects the application server because Process Scheduler runs independently from Tuxedo. See the chapter "Installing Additional Components" for more information on installing Tuxedo, and refer to the chapter "Configuring the Application Server on Windows" for the details on configuring the application server.

---

12. On the Services dialog, make sure the PeopleSoft service is selected, and click Start.
  13. Use the Process Monitor to verify that the Process Scheduler Server is running. You can also use Task Manager to verify that the executables involved with the service are running.
- For the Process Scheduler, make sure that the psprcsrv.exe is running. If you have customized the name of psprcsrv.exe, make sure the appropriate executable is running.

## Task 10A-7: Configuring the Process Scheduler for Microsoft Word (Optional)

---

This section discusses:

- Configuring Process Scheduler
- Executing Winword on Mapped Drive

### Task 10A-7-1: Configuring Process Scheduler

Some applications process documents using Microsoft Word. Here is how to configure Microsoft Word to work with the Process Scheduler.

---

**Note.** Microsoft Word must already be installed on the server; it is not included with the PeopleSoft PeopleTools install.

---

To configure Process Scheduler for Microsoft Word:

1. Log in to the PeopleSoft application in a browser and select PeopleTools, Process Scheduler, Processes.
2. Search for Process Type *Winword* and select a process.



3. On the Process Definition page, select Override Options, as shown in this example.

The screenshot shows the Oracle Process Scheduler interface. At the top, there's a navigation bar with 'Home', 'Worklist', 'MultiChannel Console', 'Add to Favorites', and 'Sign out'. Below that, a breadcrumb trail reads 'Favorites > Main Menu > PeopleTools > Process Scheduler > Processes'. A secondary navigation bar includes 'New Window', 'Help', 'Personalize Page', and an 'http' icon. The main content area has tabs for 'Process Definition', 'Process Definition Options', 'Override Options' (which is selected), 'Destination', and 'Page Transfer'. Under the 'Override Options' tab, the 'Process Type' is 'Winword' and the 'Name' is 'WORDSAMP'. A section titled 'Override Options' contains three dropdown menus: '\*Parameter List' (set to 'Append'), '\*Command Line' (set to 'None'), and '\*Working Directory' (set to 'None'). To the right of these is a 'Parameters' field containing the text '%%PS\_HOME%%\WINWORD\WORDSAMP.DOCX /mWORDSAMP'. At the bottom of the form are buttons for 'Save', 'Return to Search', 'Notify', 'Add', and 'Update/Display'. A footer navigation bar contains links for 'Process Definition', 'Process Definition Options', 'Override Options', 'Destination', 'Page Transfer', 'Notification', 'Message', and 'Run'.

Process Definition page: Override Options

4. In the Parameter List field, enter %%PS\_HOME%%\WINWORD\WORDSAMP.DOCX/mWORDSAMP and save.
5. Locate the Process Scheduler configuration file psprcs.cfg in *PS\_CFG\_HOME*\appserv\prcs\*<database\_name>* directory and open it for editing.
6. In the [Process Scheduler] section, edit the WINWORD entry so that it points to the directory where winword.exe is installed—for example, "WINWORD=C:\Program Files\Microsoft Office\OFFICE 12" (include the quotes in the entry).
7. If spaces exist in the WINWORD path in the Process Scheduler configuration file (psprcs.cfg), Microsoft Word reports will fail. You will need to modify the Process Type Definition and add quotes around the entry in the Command Line field, for example " %%WINWORD%%\winword.exe".
8. Change the Microsoft Word macro security to allow macros to be run.  
Start Microsoft Word and select Tools, Macro, Security. Select the *Low* security setting and click OK.
9. If you are running on Microsoft Windows, modify your macros to include the following line:  
`Application.AutomationSecurity=msoAutomationSecurityLow`  
You can see an example by viewing the macros in *PS\_HOME*\winword\Wordsamp.doc.
10. Make sure that all the servers (that is, Application Server and Process Scheduler servers) are running in the context of the logged-in user, as WinWord is executed in the same context.

## Task 10A-7-2: Executing Winword on Mapped Drive

If you encounter a problem in executing the WinWord process on a mapped drive, there are a couple of solutions to try. If the first solution does not work, try the second one. Try the following workaround suggestions in the order given.

To perform the first workaround:

1. Copy the file WORDSAMP.dotm from *PS\_HOME*\WINWORD\.
2. Locate the WinWord templates folder and place the file WORDSAMP.dotm there.

In general, you can find the templates folder under the logged-in user's directory. For example, for user psftuser, this would be:


C:\Users\psftuser\Microsoft\Templates

3. Open the WinWord.docx file under *PS\_HOME*\WINWORD folder and verify macro is present.
4. Sign in to the PeopleSoft application to execute the WinWord process and verify its status in Process Monitor.

To perform the second workaround:

1. In Microsoft Word, click the Microsoft Office button, and click Word Options.
2. Select Trust Center, and then click Trust Center Settings, Trusted Locations.
3. Select the check box for Allow Trusted Locations on my network, and clear the check box Disable all Trusted Locations.

4. Create a new trusted location with path pointing to the *PS\_HOME\WINWORD* folder on your mapped drive. In this example, the trusted location is `\\server1\pt854\WINWORD`:

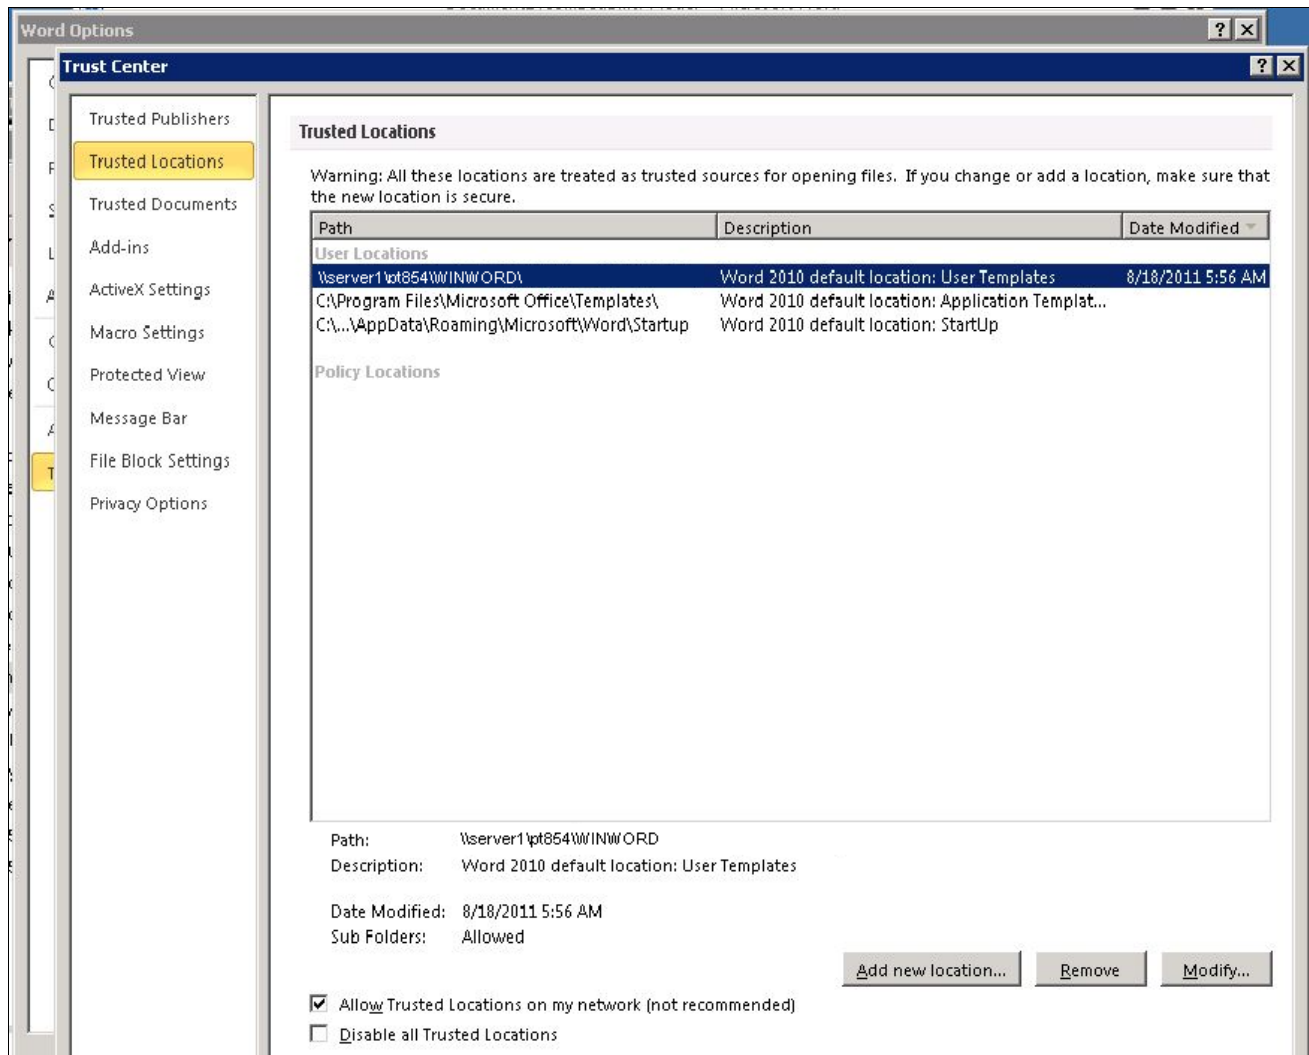

Microsoft Word Trusted Locations window


## Task 10A-8: Configuring Setup Manager

Before you can use Setup Manager, you must fulfill these requirements:

- To use the Excel to CI template-generation feature of Setup manager, the Process Scheduler must be PSNT. That is, Process Scheduler must be installed on a Microsoft Windows machine.
- Process Scheduler must be running.
- Any Process Scheduler environment variables (especially %PS\_FILEDIR%) must be specified.
- A supported version Microsoft Office must be present on the process scheduler server, and Microsoft Excel must be installed.
- The MSXML COM object for Microsoft Excel, msxml4.dll, must be present on the system.

For confirmation, navigate to %SystemRoot%\system32\msxml4.dll. Right-click and select Properties. On the

msxml4.dll Properties dialog box, select the Version tab, and then Product Version. As shown on this example of the msxml4.dll Properties dialog box, the version number must be 4.20 or above.

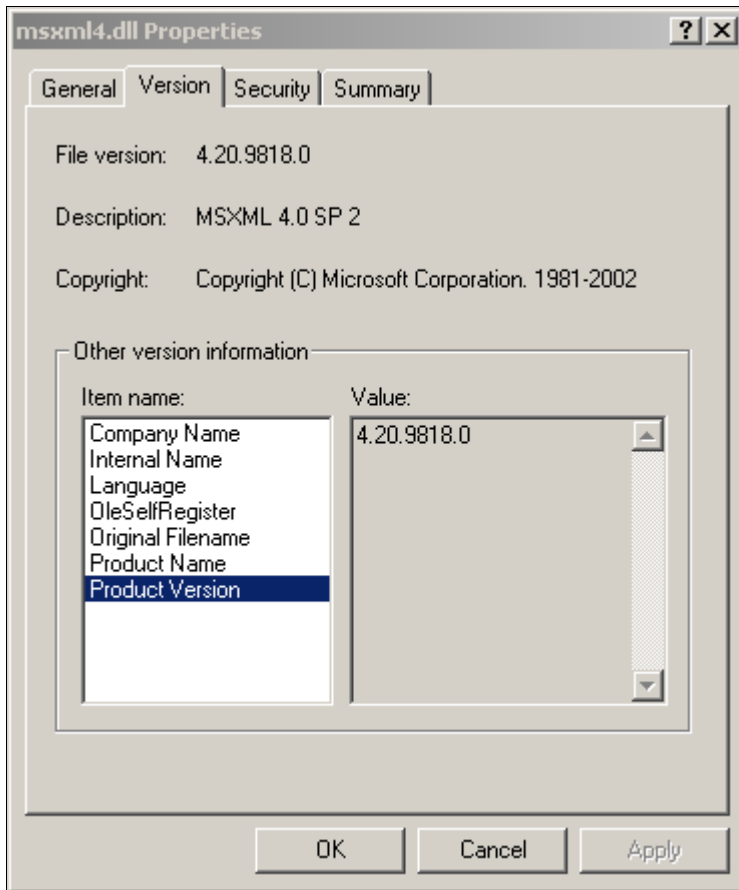

msxml4.dll Properties dialog box: Version tab

## See Also

*PeopleTools: Setup Manager*

Microsoft support, [support.microsoft.com](http://support.microsoft.com)

## Task 10A-9: Installing Products for PS/nVision

---

This section discusses:

- Understanding the PS/nVision Setup
- Installing Products for PS/nVision in Excel Automation Mode
- Installing Microsoft .NET Framework 4.6.1
- Installing Microsoft Open XML SDK for PS/nVision

## Understanding the PS/nVision Setup

PS/nVision can operate in the following three modes for PS/nVision:

- OpenXML mode

OpenXML is the default mode for PeopleSoft PeopleTools.

- Excel automation mode
- Cross-platform mode

Cross Platform is the only supported mode on the UNIX platforms that are certified for executing PS/nVision Reports on the web.

See "Setting Up Process Scheduler on UNIX," Using PS/nVision in Cross-Platform Mode on UNIX.

The different modes of executing PS/nVision are enabled by setting the UseExcelAutomation parameter in the Process Scheduler configuration file (psprcs.cfg) as follows:

- 0 - OpenXML mode
- 1 - Excel Automation mode
- 2 - Cross Platform mode

### See Also

*PeopleTools: PS/nVision*

*PeopleTools: Process Scheduler*

## Task 10A-9-1: Installing Products for PS/nVision in Excel Automation Mode

To set up PS/nVision in Excel automation mode:

- For all batch servers, install Microsoft Excel on the batch server. PeopleSoft PeopleTools supports 64-bit versions of Microsoft Excel 2010, Excel 2013, and Excel 2016.

---

**Note.** The 32-bit version of Microsoft Excel should not be installed on the machine where PS/nVision needs to run in Excel Automation Mode, as that would cause issues with running PS/nVision with 64-bit Microsoft Excel.

---

- If the batch server is on a 64-bit Microsoft Windows machine, create an empty "Desktop" folder with this path:  
C:\Windows\System32\config\systemprofile\Desktop

## Task 10A-9-2: Installing Microsoft .NET Framework 4.6.1

Before setting up PS/nVision in OpenXML mode, use these instructions to install Microsoft .NET Framework. Microsoft Open XML SDK 2.0 requires Microsoft .NET Framework versions 4.6.1.

---

**Note.** Microsoft .NET Framework 4.6.1 may be included as a feature on your operating system. See your operating system instructions to verify whether it is installed and enabled.

---

To install Microsoft .NET Framework 4.6.1:

1. If there is an existing installation of Microsoft .NET Framework 4.0 or 4.6 installed on your computer:


- a. Select Start, Programs, Control Panel, Add/Remove Programs
  - b. Locate the existing Microsoft .NET Framework installation and remove it.
2. Go to *PS\_HOME*\setup\dotnetredist.
  3. Run the dotNetFx461\_Full\_x86\_x64.exe file.
  4. Review the license agreement, select the option I have read and accept the license terms, and then click Install.  
A progress indicator appears.
  5. Click Finish when the installation is complete.

### Task 10A-9-3: Installing Microsoft Open XML SDK for PS/nVision

As described in the previous section, you must have installed Microsoft .NET Framework versions 4.6.1 before beginning this installation.


To install Microsoft Open XML SDK V2.0:

1. Go to *PS\_HOME*\setup\OpenXmlSDK.
2. Run the OpenXMLSDKv2.msi file.
3. Click Next on the welcome window.

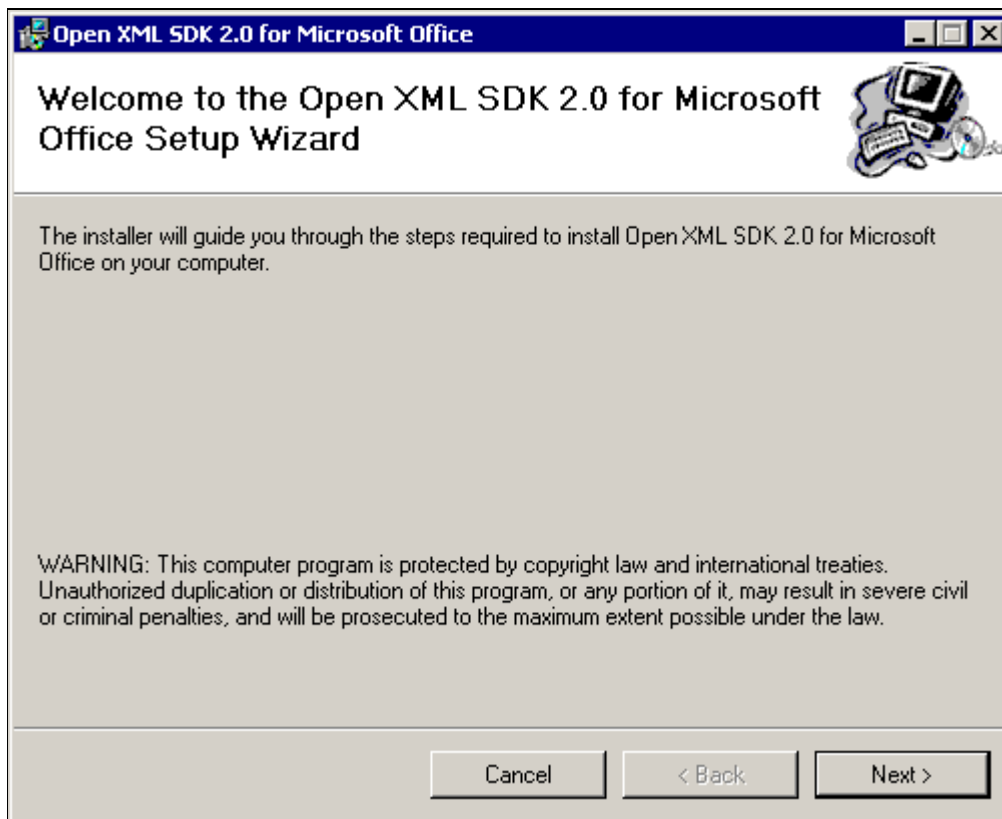


Microsoft Open XML SDK 2.0 welcome window

4. Review the license agreement, select the option I agree, and then click Next.

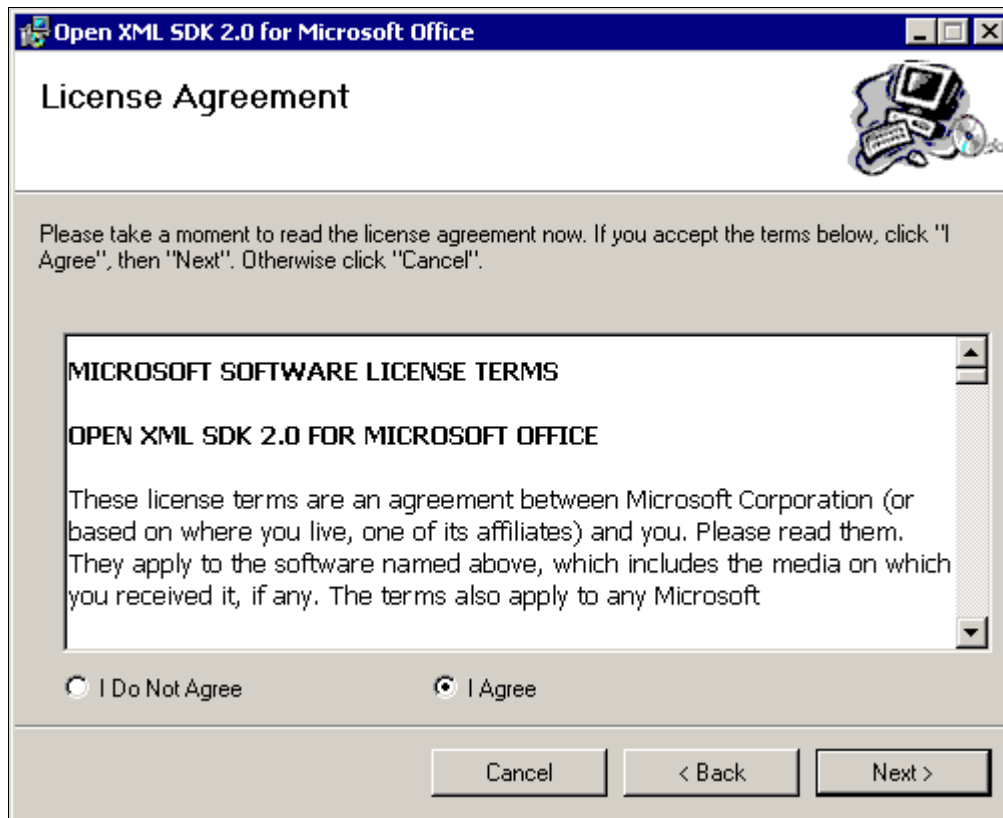

Microsoft Open XML SDK 2.0 License Agreement window


5. Accept the default location for the installation, C:\Program Files\Open XML SDK\V2.0, and then click Next.

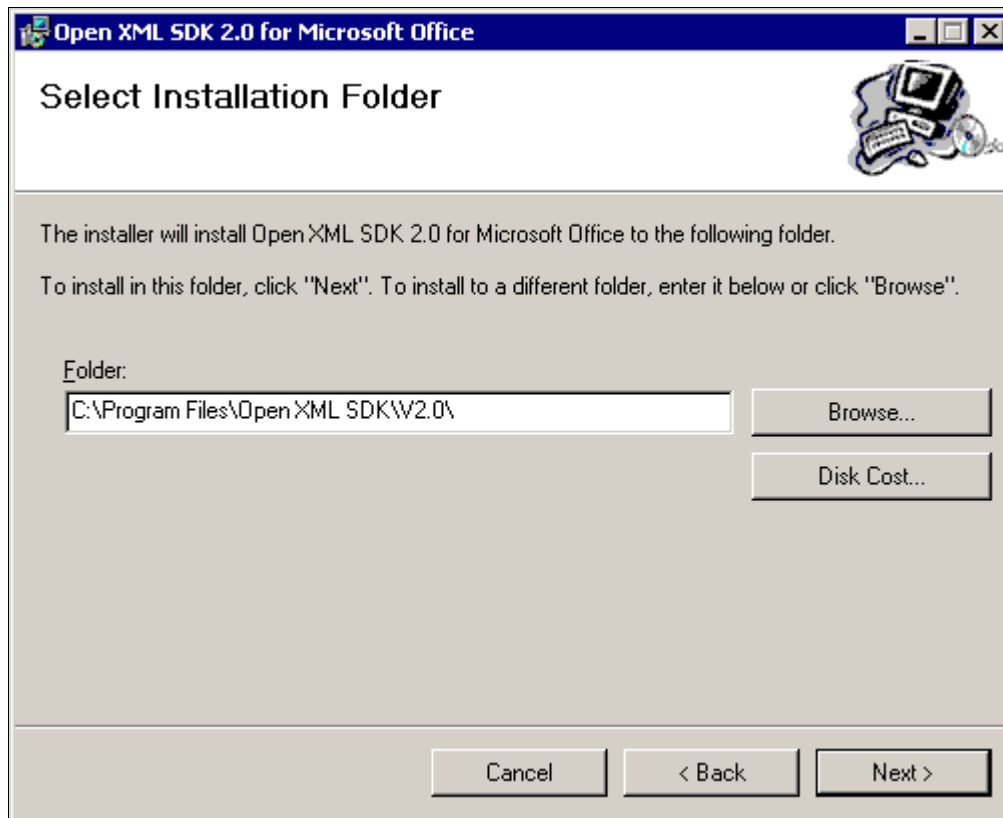

Microsoft Open XML SDK 2.0 Select Installation Folder window




6. Click Next on the Confirm Installation window to begin the installation.

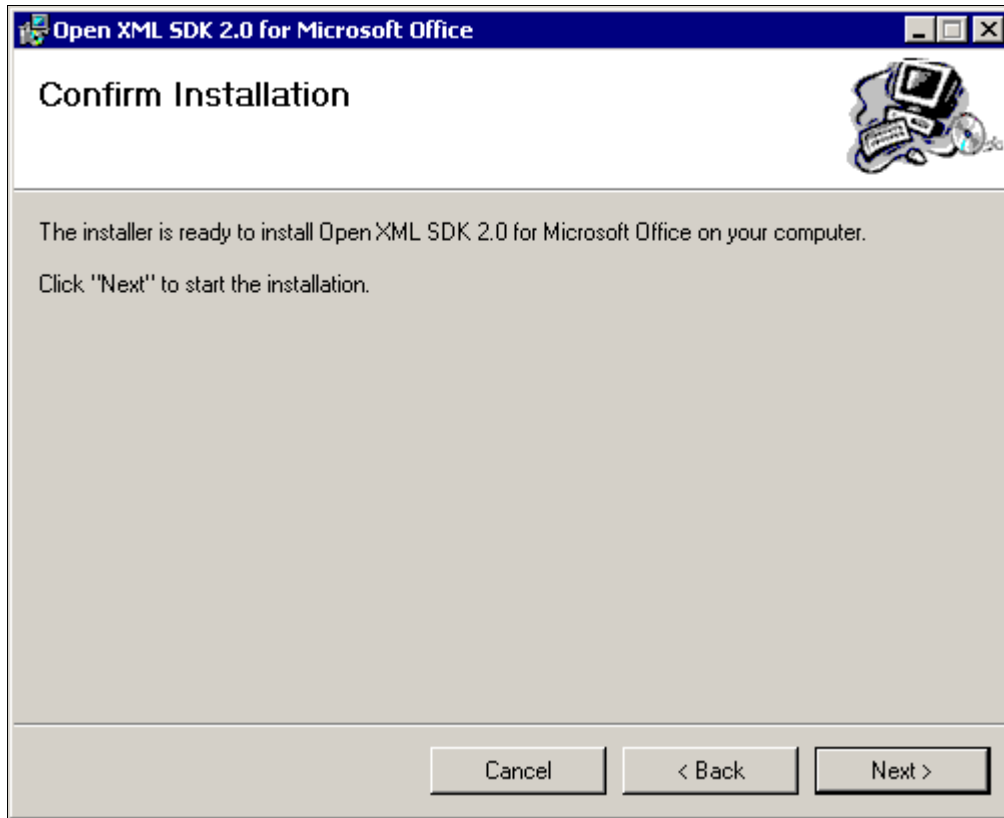

Microsoft Open XML SDK 2.0 Confirm Installation window

7. Click Close when the installation is complete.

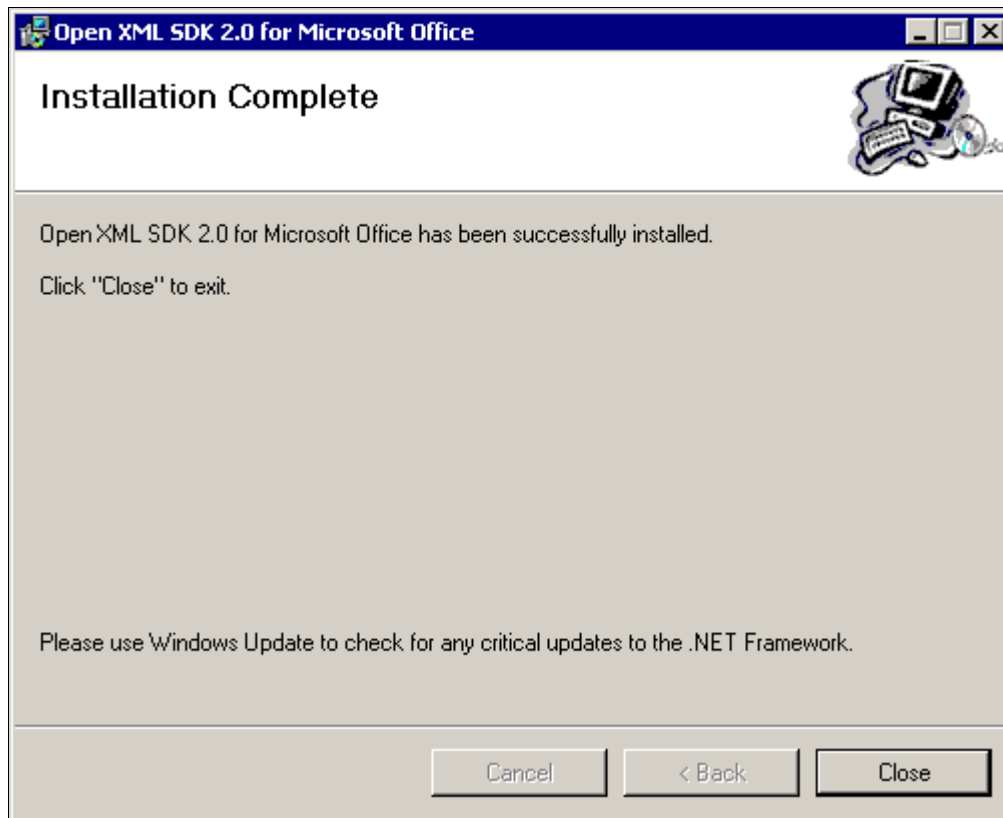

Microsoft Open XML SDK 2.0 Installation Complete window

## Chapter 10B

# Setting Up Process Scheduler on UNIX

This chapter discusses:

- Prerequisites
- Preparing the Process Scheduler File System for a PeopleTools-Only Upgrade
- Setting Up Process Scheduler Security
- Setting Up Process Scheduler to Transfer Reports and Logs to the Report Repository
- Setting Up Process Scheduler Server Agent

## Prerequisites

---

If your database runs on UNIX, you need to set up a Microsoft Windows batch environment on a Microsoft Windows application server or on a dedicated Microsoft Windows workstation for Microsoft Windows-specific batch processes, such as nVision reports, Cube Builder, or Microsoft Word. These processes are Microsoft Windows-specific applications that cannot be executed by the Process Scheduler on UNIX.

Before setting up your Process Scheduler, you must:

- Install Tuxedo.  
See "Installing Additional Components."
- Install database connectivity to be able to communicate with your database server (Process Scheduler requires a direct connection to the database).  
See "Preparing for Installation."
- Set up the web server with the PeopleSoft Pure Internet Architecture, as described in the previous chapter. This is required to set up the Process Scheduler to transfer reports or log files to the Report Repository.
- Set up your COBOL batch environment if you need to run COBOL processes through Process Scheduler. If the PeopleSoft modules purchased do not contain any COBOL modules, the COBOL run time libraries are not required. Also, COBOL is not required for applications that contain no COBOL programs. Consult My Oracle Support for the details on whether your application requires COBOL.  
See "Preparing for Installation," Planning Your Initial Configuration.
- Have both your application server and the PeopleSoft Pure Internet Architecture started. In this chapter, you must modify security options of the designated PeopleSoft user ID that will be used to boot up Process Scheduler. This requires that the user ID's profile be modified through the User Security component. Please refer to earlier chapters for the details on starting the application server and the PeopleSoft Pure Internet Architecture.
- Refer to the following location for required DB2CLI.INI and registry settings.  
See "Creating a Database," Fulfilling PeopleSoft Database Configuration Wizard Prerequisites.

In PeopleSoft PeopleTools 8.50 and later, the configuration and log files for Process Scheduler server domains reside in `PS_CFG_HOME`. If you do not set a `PS_CFG_HOME` environment variable before beginning the application server configuration, the system installs it in a default location based on the current user's settings, as follows:

```
$HOME/psft/pt/<peopletools_version>
```

See "Preparing for Installation," Defining Installation Locations.

See the product documentation *PeopleTools: System and Server Administration* for more information on the `PS_CFG_HOME` environment variable and working with server domain configuration.

## See Also

*PeopleTools: Process Scheduler*

My Oracle Support, Certifications

## Task 10B-1: Preparing the Process Scheduler File System for a PeopleTools-Only Upgrade

---

When performing the installation of the separate upgrade `PS_HOME` or `PS_CFG_HOME` (which is different than your old release `PS_HOME`), you may configure your Process Scheduler at this point in time of the installation, but do not boot your Process Scheduler until directed to do so within the upgrade.

If you are installing into an existing `PS_HOME` or `PS_CFG_HOME` after completing a PeopleTools-only upgrade, review your old `PS_HOME` or `PS_CFG_HOME` for configuration files that you may want to reuse for the new PeopleSoft PeopleTools release. While you may configure your Process Scheduler at this point in time of the installation, do not boot your Process Scheduler until directed to do so within the upgrade.

See "Preparing for Installation," Preparing for the PeopleTools-Only Upgrade.

If you were using PeopleSoft PeopleTools 8.50 or earlier, remove `PS_HOME/appserv/PSADMIN` prior to installing the new release. If you have any customized configuration files (such as `psappsrv.cfg`, `psconfig.sh`, `pscbl.mak`, `psrun.mak`, `psprcs.cfg`, and so on), copy them to another directory so that they are not overwritten during the upgrade process. This enables you to preserve any tuned variables.

Configuration files are typically overwritten when you install the new release using the PeopleSoft Installer.

## Task 10B-2: Setting Up Process Scheduler Security

---

This section discusses:

- Understanding Process Scheduler Security
- Granting Process Scheduler Administrative Rights

### Understanding Process Scheduler Security

This task—in which you set up the PeopleSoft User ID that will be used to boot Process Scheduler server so it has administrative rights to both Process Scheduler and Report Manager—guarantees that security is set up properly within your PeopleSoft database.

You must carry out this task to start Process Scheduler successfully.

## Task 10B-2-1: Granting Process Scheduler Administrative Rights

To grant Process Scheduler administrative rights:

1. Log onto your PeopleSoft database through the PeopleSoft Pure Internet Architecture.
2. Select PeopleTools, Security, User Profiles.
3. Select the User Profiles component. Use the Search dialog to select the PeopleSoft User ID you plan to use to boot the Process Scheduler server.
4. Click the Roles tab, click the plus icon to insert a new row, and there enter the *ProcessSchedulerAdmin* role to grant the user ID with administrative rights in the Process Scheduler components.

The screenshot shows the Oracle PeopleSoft interface for the 'Roles' tab. The user ID is 'QEDMO' and the description is 'QE User'. The 'Dynamic Role Rule' section is visible on the left. The 'User Roles' table is the main focus, listing various roles with their descriptions and dynamic status. The 'ProcessSchedulerAdmin' role is highlighted in the table.

Role Name	Description	Dynamic	View Definition
PTF Administrator	PTF Administrator	<input type="checkbox"/>	<a href="#">Route Control</a> <a href="#">View Definition</a>
PeopleSoft Administrator	PeopleSoft Admin Privileges	<input type="checkbox"/>	<a href="#">Route Control</a> <a href="#">View Definition</a>
PeopleSoft User	PeopleSoft User	<input type="checkbox"/>	<a href="#">Route Control</a> <a href="#">View Definition</a>
Portal Administrator	Portal Administrator	<input type="checkbox"/>	<a href="#">Route Control</a> <a href="#">View Definition</a>
Portal Manager	Portal Manager	<input type="checkbox"/>	<a href="#">Route Control</a> <a href="#">View Definition</a>
ProcessSchedulerAdmin	Process Scheduler Admin	<input type="checkbox"/>	<a href="#">Route Control</a> <a href="#">View Definition</a>
QE Role	QE Role	<input type="checkbox"/>	<a href="#">Route Control</a> <a href="#">View Definition</a>
Search Administrator	Search Administrator	<input type="checkbox"/>	<a href="#">Route Control</a> <a href="#">View Definition</a>
Search Developer	Search Developer	<input type="checkbox"/>	<a href="#">Route Control</a> <a href="#">View Definition</a>
ReportDistAdmin	Report Distribution Admin	<input type="checkbox"/>	<a href="#">Route Control</a> <a href="#">View Definition</a>

Process Scheduler window: Roles tab

5. Repeat the instructions in step 4 to add the role *ReportDistAdmin*.  
This will grant the user ID administrative rights to the Report Manager component. Carry out this step only if the same user is also responsible for maintaining the content of Report Manager.
6. Click Save to save your changes.
7. Select the General tab and jot down the Permission List name assigned to the Process Profile field.
8. From the Portal menu, choose PeopleTools, Security, Permissions & Roles, Permission Lists.
9. In the Search dialog, enter the Permission List you noted in step 7.
10. Select the Can Start Application Server check box.

11. Click Save to save your changes.

## Task 10B-3: Setting Up Process Scheduler to Transfer Reports and Logs to the Report Repository

---

This section discusses:

- Understanding Report Distribution
- Setting Up Single Signon to Navigate from PIA to Report Repository
- Determining the Transfer Protocol
- Starting the Distribution Agent
- Setting Up the Report Repository
- Setting Up the Distribution for Your Process Scheduler Server
- Setting Up Sending and Receiving of Report Folders in the Report Manager

### Understanding Report Distribution

The PeopleSoft PeopleTools Report Distribution lets you access reports and log files generated from process requests run by a Process Scheduler Server Agent. Using the PeopleSoft Pure Internet Architecture, you can view reports and log files from the web browser through the Report Manager or Process Monitor Detail page. Report Distribution enables you to restrict access to these reports to authorized users based either on user ID or role ID.

This product also includes the Distribution Agent component, which runs on the same server as the Process Scheduler Server Agent. The Distribution Agent, a process that runs concurrently with the Process Scheduler Server Agent, transfers to the Report Repository files generated by process requests initiated by the Process Scheduler Server Agent.

The Distribution Agent transfers files to the Report Repository when one of these criteria is true:

- The Process Scheduler Server Agent is set up in the *Server Definition* to transfer all log files to the Report Repository.
- The process request output destination type is *Web/Window*.

In either case, the Process Scheduler Server Agent inserts a row in the Report List table (PS\_CDM\_LIST). The server agent then updates the distribution status for a process request to *Posting* upon completion of the program associated with the process request. The distribution status of *Posting* signals that the files for the process request are ready for transfer to the Report Repository. The Distribution Agent is notified by Process Scheduler for any process requests that are ready for transferring. As part of the process to transfer files to the Report Repository, the Distribution Agent performs the following steps:

- *Transfer files to the Report Repository.* All the report and log files are transferred to the Report Repository. For each process request transferred, a directory is created in the Report Repository using the following format: \<database name>\<date yyymmdd>\<report id>. All the files for a process request are stored in this directory.
- *Delete the directory from the Process Scheduler Agent's Log/Output directory.* When the output destination type specified for a process request is *Web/Window*, all the files and directory associated with the process request are deleted from the Process Scheduler Log/Output directory after the files are transferred to the Report Repository.

The following diagram illustrates the Process Scheduler and Report Repository architecture. The diagram includes the following items:


- The web browser gives access to the Process Request dialog and the Report or Log Viewer.
- The Report Repository is part of the PeopleSoft Pure Internet Architecture.

---

**Note.** The PeopleSoft Pure Internet Architecture must be installed for Process Scheduler to be able to transfer reports to the Report Repository.

---

- The Process Scheduler Server includes the Process Scheduler Server Agent and the Distribution Agent.
- The transfer protocol between Process Scheduler and the Report Repository may be FTP/FTPS, HTTP/HTTPS, or SFTP.

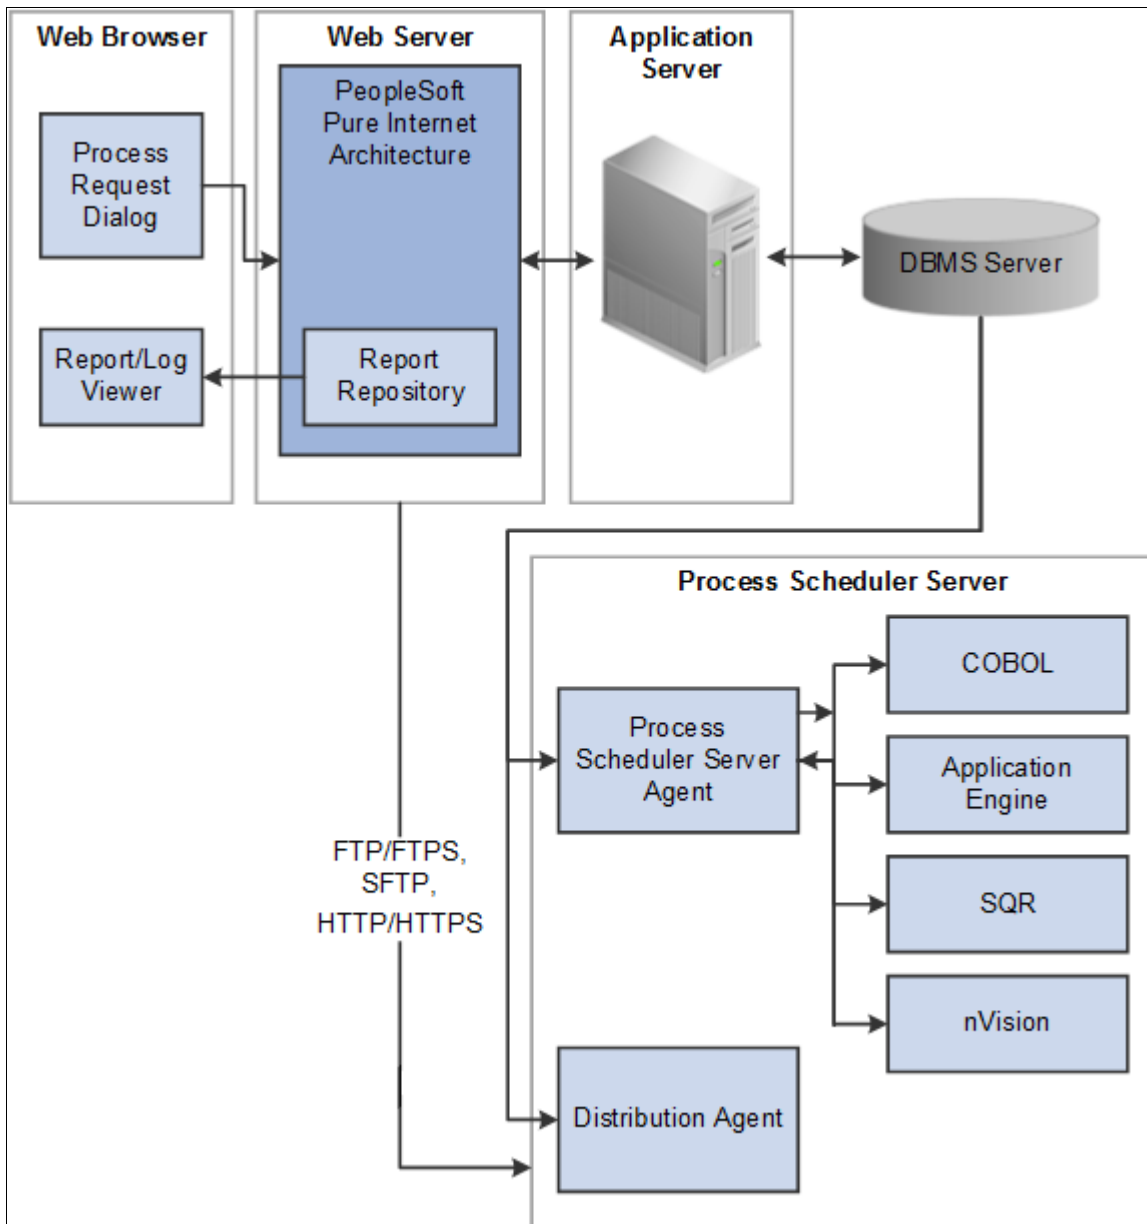

Process Scheduler and Report Repository Architecture

Before users can view a report, they are authenticated against the PeopleSoft database.

You should set up single signon if you do not want users to have to log on an additional time to view reports in the Report Repository. For the details on setting up single signon, consult the security documentation.

See *PeopleTools: Security Administration*.

## Task 10B-3-1: Setting Up Single Signon to Navigate from PIA to Report Repository

To view reports (log files or system files) from Report Repository, you need to pass the authentication. Report Repository should be treated as a separate PeopleSoft application. To navigate from PeopleSoft Pure Internet Architecture (PIA) to Report Repository, you need to set up single signon to avoid getting a prompt for a second signon. This section includes some considerations for setting up single signon to navigate from PIA to Report Repository.

If Report Repository resides on the same web server as PIA, make sure your Local Message Node is set up to be a "trusted" node for single signon for your system.

If Report Repository resides on a different web server than PIA, do the following:

- Make sure your Local Message Node is set up to be a "trusted" node for single signon for your system.
- Use a fully qualified domain name when addressing the web server for both PIA and Report Repository. For example, enter `http://<machineName>.peoplesoft.com/<site_name>/signon.html` instead of `http://<machineName>/<site_name>/signon.html`.
- Specify the Authentication Domain for your application during installation. If you have multiple applications, and you want them to employ single signon, it is important to specify the same Authentication Domain for all applications.

See the information on implementing single signon in the *PeopleTools: Security Administration* product documentation.

- Set up single signon with a password, like this:
  - Choose PeopleTools, Integration Broker, Integration Setup, Nodes.
  - Click Search and then select the node marked as Default Local Node.
  - Select *Password* for the Authentication Option.
  - Enter a password of your choice.
  - Enter the password again in the Confirm Password field.
  - Enter the user ID for which you are setting up single signon in the Default User ID field.
  - Save the Node Definition.
  - Sign out from the PeopleSoft application.
  - Reboot your application server.

### See Also

*PeopleTools: Security Administration*

## Task 10B-3-2: Determining the Transfer Protocol

*We recommend using HTTP as your transfer protocol.*



Before transferring the files to the Report Repository, you need to determine which transfer protocol to use. If you have a Microsoft Windows Process Scheduler and a Microsoft Windows web server, you can use either an XCOPY, FTP/FTPS, SFTP, or HTTP/HTTPS protocol. (If FTP information is not specified, Process Scheduler will perform an XCOPY.) If you have a PeopleSoft Process Scheduler on Microsoft Windows and a UNIX web server, you can use FTP/FTPS, SFTP, or HTTP/HTTPS. If you have a PeopleSoft Process Scheduler on UNIX, you can use FTP/FTPS, SFTP, or HTTP/HTTPS.

---

**Note.** If you are using FTP/FTPS or SFTP, the corresponding daemon must be set up in your web server.

---

**Note.** JRE is installed automatically on your Process Scheduler server.

---

### Task 10B-3-3: Starting the Distribution Agent

The Distribution Agent is automatically started as another Oracle Tuxedo server when a Process Scheduler Server is booted. If a Process Scheduler Server was set up without specifying a Distribution Node in the *Server Definition* page, the Process Scheduler server will have a status in Process Monitor of "Running with No Report Node." After a node is defined for the Process Scheduler server, in the next cycle the Process Scheduler server checks the state of the system, and the Distribution Agent dynamically sets up its environment.

### Task 10B-3-4: Setting Up the Report Repository

This section discusses:

- Defining ReportRepositoryPath
- Defining the Report Node to Use HTTP/HTTPS
- Defining the Report Node to Use FTP
- Defining the Report Node to Use FTPS
- Defining the Report Node to Use SFTP

#### Defining ReportRepositoryPath

The ReportRepositoryPath specifies the location of a directory for the Report Repository. You can specify the location for the Report Repository Path on the General page of the Web Profile during installation. If you do not set the location in the Web Profile, the location given by ReportRepositoryPath in the configuration.properties file is used for the default location. Note that the value entered for Report Repository Path in the Web Profile overrides any entry in the configuration.properties file.

See *PeopleTools: Portal Technology*, "Configuring Web Profiles."

Use the following formats to enter the name for the directory that you want to use for the ReportRepositoryPath. The examples below give the default values. Note that you must use a forward slash (/) in both cases:

- *Microsoft Windows*: ReportRepositoryPath=c:/psreports
- *UNIX*: ReportRepositoryPath=<user\_home>/PeopleSoft Internet Architecture/psreports

For <user\_home> substitute the home directory for the current user.

#### Defining the Report Node to Use HTTP/HTTPS

To define the report node to use HTTP/HTTPS:

1. Select PeopleTools, Process Scheduler, Report Nodes.
2. Select the Add a New Value link and enter the Report node name.
3. On the Report Node Definition page, select HTTP or HTTPS from the Protocol drop-down list.

Select the HTTP option if you are *not* using SSL. Select the HTTPS option if you are using SSL. The pages for HTTP and HTTPS have the same fields. These examples show HTTP.

Note that if you are using SSL you need to have Client Certificates installed on your web server.

The screenshot shows the 'Report Node Definition' page in Oracle PeopleTools. The breadcrumb trail is 'Main Menu > PeopleTools > Process Scheduler > Report Nodes'. The Oracle logo is at the top left. A search bar contains 'All' and 'Search'. There are links for 'Advanced Search' and 'Last Search Results'. The page title is 'Report Node Definition'. The form is divided into several sections:

- Node Name:** HTTP
- \*Protocol:** HTTP (dropdown menu)
- Validate:** button
- Distribution Node Details:**
  - URLID:** http://<machine\_name>:<port\_number>/psreports/<site\_name>
  - Description:** (empty text box)
  - Operating System:** UNIX (dropdown menu)
- Login Details:**
  - Login ID:** (empty text box)
  - Password:** (empty text box)
  - Confirm Password:** (empty text box)
- URL Details:**
  - URI Host:** <machine\_name>
  - URI Port:** 80
  - URI Resource:** SchedulerTransfer/<site\_name>

At the bottom of the form are buttons for 'Save', 'Return to Search', 'Notify', and 'Refresh'.

Report Node Definition page for the HTTP protocol

4. Enter the following information in the Distribution Node Details area:
  - **URLID:** Enter the URL of the web server using the following format:  
`http://<machine_name>:<port_number>/psreports/<site_name>`

Replace `<machine_name>` with the name of your machine. Use the fully qualified host name for your web server. If you are using an HTTP or HTTPS port other than the defaults, you need to specify the port number.

**Note.** If you specify the Authentication Token Domain name during the PIA installation, you must include a fully qualified domain name for the URL instead of the IP address.

- **Description:** Enter a description of the server (optional).

- *Operating System:* Select the web server operating system, Windows or UNIX.
5. Enter the following information in the Login Details area:
    - *Login ID:* Enter the Login ID. This is not required, unless basic authentication has been set up on the web server by the Web Administrator.
    - *Password and Confirm Password:* Enter the password, and confirm it, for the user ID specified in the Login ID field. This is not required, unless basic authentication has been set up on the web server by the Web Administrator.

---

**Note.** The setup of authentication is optional, but is recommended for security of the Report Repository when using the HTTP to transfer files. For information on setting up authentication on the web server where the Report Repository resides, refer to the *PeopleTools: Security Administration* product documentation.

---

6. Enter the following information in the URI Details area:
  - *URI Host:* Enter the machine name for the report repository.

---

**Note.** In a basic setup, the machine name for the report repository will match the machine name of the web server URL. However, under certain circumstances—for example, if you are using a reverse proxy server—the URL and URI Host may have different machine names.

---

- *URI Port:* Enter the port number, which must match the port number of your web server (defaults are HTTP = 80, HTTPS = 443). If you change a port number you will lose the default values for both protocols.
  - *URI Resource:* Enter SchedulerTransfer/<site name>.
7. Click Save to save your entries.
  8. Click Validate to confirm that your entries are complete and correct.
 

The validation confirms that the necessary parameters are present and correct, and simulates a file transfer with the entered information. You either see a message that confirms the success of the validation, or a message that displays an error for missing parameters or an unsuccessful transfer simulation.
  9. To add additional report nodes, click Add to return to the Search page.

## Defining the Report Node to Use FTP

If you use the FTP report node protocol, note that:

- If your FTP server is a Microsoft Windows server, you may have to set up the FTP service.
- The Distribution Agent will perform a validation after FTP has transferred files into the Report Repository by sending a query request to the web server. For this task to be completed, it is critical that the value entered in the URL is accurate. Verify that the machine name, port number, and site number that you specify are correct.

If this setup is not completed, the process request will get a status of NOT POSTED in the Process Monitor Detail page and will log the message "Unable to verify files posted."

To define the report node to use FTP:

1. Select PeopleTools, Process Scheduler, Report Nodes.
2. Select Add a New Value, enter the Report node name, and click Add.

- On the Report Node Definition page, select FTP from the Protocol drop-down list.

The screenshot shows the 'Report Node Definition' page for the FTP protocol. The page is titled 'Report Node Definition' and contains several sections:

- Node Name:** FTP
- \*Protocol:** FTP
- Validate:** Button
- Distribution Node Details:**
  - URLID:** http://<machine\_name>:<port\_number>/psreports/<site\_name>
  - Description:** FTP sample
  - Operating System:** UNIX
- Login Details:**
  - Login ID:** <user\_id>
  - Password:** [Masked]
  - Confirm Password:** [Masked]
- File Transfer Details:**
  - Home Directory:** /home/psreports
  - FTP Address:** <machine\_name>
  - SSL Mode:** EXPLICIT
- Connection Properties:** Table with Property Name and Property Value columns.
- Password Encryption:**
  - Password:** [Masked]
  - Confirm Password:** [Masked]
  - Encrypt:** Button
  - Encrypted Password:** [Masked]

At the bottom of the page, there are buttons for Save, Return to Search, Notify, and Refresh.

Report Node Definition page for the FTP protocol

- In the Distribution Node Details area, enter the following information:
  - URLID:** Enter the URL of the web server using this format:  
`http://<machine_name>:<port_number>/psreports/<site_name>`

Replace *<machine name>* with the name of your web server. If you are using an HTTP port other than 80, you need to specify the port number. The variable *<site name>* refers to the directory where you installed the PIA files; this will default to ps for the first installation.

---

**Note.** If you specify the Authentication Token Domain name during the PIA installation, you must include a fully qualified domain name for the URL instead of the IP address.

---

---

**Note.** If you installed the web server software with the default TCP port of 80, you do not need to specify the port number in the URL path. However, if you installed the web server to some other port, you must specify the port number in the URL path.

---

- *Description:* Enter a description of the server (optional).
  - *Operating System:* Select the operating system of the Report Repository, Windows or UNIX.
  - *Network Path:* This information is not required for the FTP protocol
5. In the Login Details area, enter the following information:
- *Login ID:* Enter the FTP User ID.
  - *Password and Confirm Password:* Enter the password, and enter it a second time, for the FTP User ID specified in the Login ID field.
6. In the File Transfer Details area, enter the following information:
- *Home Directory:* Enter the directory specified during the PIA installation as the Report Repository. The FTP User ID must have write access to this directory. Note that this is not a required field for FTP transfer, as the system uses the Report Repository directory specified at install time or the current directory assigned to ReportRepositoryPath in configuration.properties. Note that the value you enter for the Report Repository Path in the Web Profile at install time overrides any entry for ReportRepositoryPath in configuration.properties.  
For UNIX, the default directory is <user\_home>/PeopleSoft Internet Architecture/psreports/.
  - *FTP Address:* Enter the machine name or the IP address of the Report Repository. If the name of the machine is used, it must be included on a DNS server.

7. If you need to specify additional properties, use the Connection Properties area. Specifying the Connection Properties is optional.

Click the lookup button (magnifying glass) and select one of the properties in the following table. Click the plus sign to add another connection property.

Property Name	Property Value
ACTIVEMODE	To enable active mode, add the ACTIVEMODE property to the URL and set it to <i>Y</i> .  The default FTP connection mode is extended passive mode.
ACTIVEPORTOPTION	This property can be used along with ACTIVEMODE. When active mode is enabled, you can use ACTIVEPORTOPTION to specify the IP address and port on which the FTP server can be accessed. This is useful when the server is behind a firewall. By default, ACTIVEPORTOPTION uses the default IP address of your system. If you want to use a particular IP address, set the ACTIVEPORTOPTION value to either the full IP address, a host name to resolve to an IP address, or a local network interface name.  You can also specify a port range. For example: <i>10.176.147.111:10000-13000</i>
ENABLEEPRPRT	This option can be used only with Active Mode. If Active Mode is enabled and ENABLEEPRPRT is set to <i>N</i> , then the system will use a PORT (IPv4) Active Mode connection.  By default, ENABLEEPRPRT is <i>Y</i> , if Active Mode is set to <i>Y</i> .
EXTENDEDPASSIVEMODE	<ul style="list-style-type: none"> <li>• <i>0</i>: Disable EPSV</li> <li>• <i>1</i>: Enable EPSV</li> </ul> <p>This property enables you to control whether extended passive mode (EPSV) will be used by FTP.</p> <p>EPSV is used by default. That is, by default, this value is considered to be 1.</p> <p>If the client fails to connect to the server with EPSV, then the system will try passive mode (PASV). To use PASV only, add EXTENDEDPASSIVEMODE to the URL Properties and set it to 0.</p>
JKSPASSWORD	Specify the Java keystore (JKS) password.
JKSPATH	Specify the Java keystore (JKS) path.
PASSWORD	Specify the password associated with the USER property, which identifies the FTP User ID.
USER	Specify the FTP User ID used for authentication when accessing the FTP site.

8. If you need to specify an encrypted password in any of the property fields, use the Password Encryption area to generate the encrypted password, as follows:
  - a. In the Password field, enter a password.
  - b. In the Confirm Password field, enter the password again.
  - c. Click Encrypt.  
The encrypted password is displayed in the Encrypted Password field.
  - d. From the Encrypted Password field, cut the encrypted password and then copy the encrypted value to the appropriate location.
9. Select Save to save your entries.
10. Click Validate to confirm that your entries are correct.  
The validation confirms that the necessary parameters are present and correct, and simulates a file transfer with the entered information. You either see a message that confirms the success of the validation, or a message that displays an error for missing parameters or an unsuccessful transfer simulation.
11. To add additional report nodes, click Add to return to the Search page.

## Defining the Report Node to Use FTPS

To define the report node to use FTPS:

1. Select PeopleTools, Process Scheduler, Report Nodes.
2. Select Add a New Value, enter the Report node name, and click Add.

- On the Report Node Definition page, select FTPS from the Protocol drop-down list.

The screenshot shows the Oracle Report Node Definition page for the FTPS protocol. The page is titled "Report Node Definition" and includes a navigation bar with "Favorites", "Main Menu", "PeopleTools", "Process Scheduler", and "Report Nodes". The Oracle logo is visible in the top left. The page contains several sections:

- Node Name:** FTPS
- \*Protocol:** FTPS (selected in a dropdown menu)
- Validate:** A button to validate the configuration.
- Distribution Node Details:**
  - URLID:** `http://<machine_name>:<port_number>/psreports/<site_name>`
  - Description:** FTPS sample
  - Operating System:** UNIX (selected in a dropdown menu)
  - Network Path:** (empty text field)
- Login Details:**
  - Login ID:** <user\_id>
  - Password:** (masked with dots)
  - Confirm Password:** (masked with dots)
- File Transfer Details:**
  - Home Directory:** /home/psreports
  - FTP Address:** <machine\_name>
  - SSL Mode:** EXPLICIT (selected in a dropdown menu)
- Connection Properties:** A table with columns for Property Name and Property Value.
- Password Encryption:**
  - Password:** (text field)
  - Confirm Password:** (text field)
  - Encrypt:** A button to encrypt the password.
  - Encrypted Password:** (text field)

At the bottom of the page, there are buttons for "Save", "Notify", and "Refresh".

Report Node Definition page for the FTPS protocol

- In the Distribution Node Details area, enter the following information:
  - URLID:** Enter the URL of the web server using this format:  
`http://<machine_name>:<port_number>/psreports/<site_name>`

Replace *<machine name>* with the name of your web server. If you are using an HTTP port other than 80, you need to specify the port number. The variable *<site name>* refers to the directory where you installed the PIA files; this will default to *ps* for the first installation.



---

**Note.** If you specify the Authentication Token Domain name during the PIA installation, you must include a fully qualified domain name for the URL instead of the IP address.

---



---

**Note.** If you installed the web server software with the default TCP port of 80, you do not need to specify the port number in the URL path. However, if you installed the web server to some other port, you must specify the port number in the URL path.

---

- *Description:* Enter a description of the server (optional).
  - *Operating System:* Select the operating system of the Report Repository, Windows or UNIX.
  - *Network Path:* This information is not required for the FTPS protocol.
5. In the Login Details area, enter the following information:
- *Login ID:* Enter the FTP User ID.
  - *Password and Confirm Password:* Enter the password, and enter it a second time, for the user ID specified in the Login ID field.
6. In the File Transfer Details area, enter the following information:
- *Home Directory:* Enter the directory specified during the PIA installation as the Report Repository. The FTP User ID must have write access to this directory. Note that this is not a required field for FTP transfer, as the system uses the Report Repository directory specified at install time or the current directory assigned to ReportRepositoryPath in configuration.properties. Note that the value you enter for the Report Repository Path in the Web Profile at install time overrides any entry for ReportRepositoryPath in configuration.properties.

For UNIX, the default directory is <user\_home>/PeopleSoft Internet Architecture/psreports/.

- *FTP Address:* Enter the machine name or the IP address of the Report Repository. If the name of the machine is used, it must be included on a DNS server.
- *SSL Mode:* Select Explicit or Implicit from the drop-down list.

These are two separate methods developed to invoke the client security for use with FTP clients. With the explicit mode, FTPS-aware clients can invoke security with an FTPS-aware server without breaking overall FTP functionality with non-FTPS-aware clients. The implicit method requires that all clients of the FTPS server be aware that SSL is to be used on the session, and thus is incompatible with non-FTPS-aware clients.

7. In the Connection Properties area, click the lookup button (magnifying glass) and select one of the properties in the following table:

Click the plus sign to add another connection property.

Property Name	Property Value
ACTIVEMODE	To enable active mode, add the ACTIVEMODE property to the URL and set it to <i>Y</i> .  The default FTPS connection mode is extended passive mode.
ACTIVEPORTOPTION	This property can be used along with ACTIVEMODE. When active mode is enabled, you can use ACTIVEPORTOPTION to specify the IP address and port on which the FTP server can be accessed. This is useful when the server is behind a firewall. By default, ACTIVEPORTOPTION uses the default IP address of your system. If you want to use a particular IP address, set the ACTIVEPORTOPTION value to either the full IP address, a host name to resolve to an IP address, or a local network interface name.  You can also specify a port range. For example: <i>10.176.147.111:10000-13000</i>
CERTALIAS	Certificate Alias: The Certificate Alias must be an alias name of a certificate stored in the database (using the PeopleSoft PeopleTools Digital Certificates page).  <b>Note.</b> Currently, only PEM certificates are supported for FTPS.
ENABLEEPRPT	This option can be used only with Active Mode. If Active Mode is enabled and ENABLEEPRPT is set to <i>N</i> , then the system will use a PORT (IPv4) Active Mode connection.  By default, ENABLEEPRPT is <i>Y</i> , if Active Mode is set to <i>Y</i> .
EXTENDEDPASSIVEMODE	<ul style="list-style-type: none"> <li>• <i>0</i>: Disable EPSV</li> <li>• <i>1</i>: Enable EPSV</li> </ul> <p>This property enables you to control whether extended passive mode (EPSV) will be used by FTP.</p> <p>EPSV is used by default. That is, by default, this value is considered to be 1.</p> <p>If the client fails to connect to the server with EPSV, then the system will try passive mode (PASV). To use PASV only, add EXTENDEDPASSIVEMODE to the URL Properties and set it to 0.</p>
JKSPASSWORD	Specify the Java keystore (JKS) password.
JKSPATH	Specify the Java keystore (JKS) user.

Property Name	Property Value
KEYSTOREPASSWORD	<p>This property is required for FTPS and HTTPS repositories. For attachments transferred from the PeopleSoft system to the FTPS or HTTPS repository, the system retrieves the key pair for the client certificate from the digital certificate store and writes the pair to a file in PKCS12 format with password protection. The value of this property will be used as the password for the PKCS12 file.</p> <p>The PKCS12 file enables connection and file transfer, and it exists only temporarily in &lt;PS_SERVDIR&gt;\files\&lt;CERT ALIAS NAME&gt; for the duration of the file transfer. The system deletes the file after the file transfer transaction.</p> <p><b>Note.</b> If the system fails to delete the certificate alias file, a message will be written to the application server log. The maximum number of files that can exist at any time is equal to the total number of FTPS and HTTPS URL identifiers defined in the system.</p> <p>For information on setting the PS_SERVDIR environment variable, see the <i>PeopleTools: Integration Broker</i> product documentation.</p>
PASSWORD	Specify the password associated with the USER property, which identifies the FTP User ID.
SSLUAGELEVEL	<ul style="list-style-type: none"> <li>• <i>0 - No SSL:</i> No SSL will be used.</li> <li>• <i>1 - Try SSL:</i> Try using SSL, but proceed as normal otherwise.</li> <li>• <i>2 - Control:</i> Require SSL for the control connection.</li> <li>• <i>3 - SSL Only:</i> (Default) Require SSL for all communication.</li> </ul>
USER	Specify the FTP User ID used for authentication when accessing the FTP site.
VERIFYHOST	<ul style="list-style-type: none"> <li>• <i>0:</i> Do not verify the server for host name.</li> <li>• <i>1:</i> Check if there exists any value in the common name field in the server certificate. This check does not verify if it matches with what the client specifies.</li> <li>• <i>2:</i> (Default) Check for a match with the host name in the URL with the common name or Subject Alternate field in the server certificate.</li> </ul>
VERIFYPEER	<ul style="list-style-type: none"> <li>• <i>False:</i> Do not verify the peer.</li> <li>• <i>True:</i> (Default) Verify the peer by authenticating the certificate sent by the server.</li> </ul>

8. If you need to specify an encrypted password in any of the property fields, use the Password Encryption area to generate the encrypted password, as follows:

- a. In the Password field, enter a password.
- b. In the Confirm Password field, enter the password again.
- c. Click Encrypt.

The encrypted password is displayed in the Encrypted Password field.

- d. From the Encrypted Password field, cut the encrypted password and then copy the encrypted value to the appropriate location.
9. Select Save to save your entries.
  10. Click Validate to confirm that your entries are correct.

The validation confirms that the necessary parameters are present and correct, and simulates a file transfer with the entered information. You either see a message that confirms the success of the validation, or a message that displays an error for missing parameters or an unsuccessful transfer simulation.

11. To add additional report nodes, click Add to return to the Search page.

## Defining the Report Node to Use SFTP

To define the report node to use SFTP:

1. Select PeopleTools, Process Scheduler, Report Nodes.
2. Select Add a New Value, enter the Report node name, and click Add.

- On the Report Node Definition page, select SFTP from the Protocol drop-down list.

Report Node Definition

Node Name: SFTP  
 \*Protocol: SFTP [Validate]

**Distribution Node Details**

URLID: http://<machine\_name>:<port\_number>/psreports/<site\_name>  
 Description: SFTP sample  
 Operating System: UNIX

**Login Details**

Login ID: <user\_id>  
 Password: ..... Confirm Password: .....

**File Transfer Details**

Home Directory: /home/psreports  
 FTP Address: <machine\_name>

**Connection Properties**

Property Name	Property Value

**Password Encryption**

Password: ..... Confirm Password: .....  
 Encrypt Encrypted Password: .....

Save Notify Refresh

Report Node Definition page for the SFTP protocol

- In the Distribution Node Details area, enter the following information:
  - URLID:** Enter the URL of the web server using this format:  
`http://<machine_name>:<port_number>/psreports/<site_name>`

Replace *<machine name>* with the name of your web server. If you are using an HTTP port other than 80, you need to specify the port number. The variable *<site name>* refers to the directory where you installed the PIA files; this will default to *ps* for the first installation.

---

**Note.** If you specify the Authentication Token Domain name during the PIA installation, you must include a fully qualified domain name for the URL instead of the IP address.

---

---

**Note.** If you installed the web server software with the default TCP port of 80, you do not need to specify the port number in the URL path. However, if you installed the web server to some other port, you must specify the port number in the URL path.

---

- *Description:* Enter a description of the server (optional).
  - *Operating System:* Select the operating system of the Report Repository, Windows or UNIX.
  - *Network Path:* This information is not required for the SFTP protocol.
5. In the Login Details area, enter the following information:
- *Login ID:* Enter the FTP User ID.
  - *Password and Confirm Password:* Enter the password, and enter it a second time, for the user ID specified in the Login ID field.
6. In the File Transfer Details area, enter the following information:
- *Home Directory:* Enter the directory specified during the PIA installation as the Report Repository. The FTP User ID must have write access to this directory. Note that this is not a required field for FTP transfer, as the system uses the Report Repository directory specified at install time or the current directory assigned to ReportRepositoryPath in configuration.properties. Note that the value you enter for the Report Repository Path in the Web Profile at install time overrides any entry for ReportRepositoryPath in configuration.properties.  
For UNIX, the default directory is <user\_home>/PeopleSoft Internet Architecture/psreports/.
  - *FTP Address:* Enter the machine name or the IP address of the Report Repository. If the name of the machine is used, it must be included on a DNS server.

7. In the Connection Properties area, click the lookup button (magnifying glass) and select one of the properties in the following table.

Click the plus sign to add additional connection properties.

Property Name	Property Value
AUTHTYPE	Select one of the following the authentication types: <ul style="list-style-type: none"> <li>• <i>PUBLICKEY</i></li> <li>• <i>PASSWORD</i></li> <li>• <i>ANY</i></li> </ul>
PASSWORD	Specify the user password. You can enter the password in the Password Encryption box, click Encrypt, and then copy the encrypted value to the Password property.
PASSWORDKEY	Enter the password for the private key.
PRIVATEKEY	Select the private key.
PUBLICKEY	Select the public key.
SSHKEYALIAS	Select the SSH certificate saved to the database using the PeopleTools Security, Digital Certificates page (select PeopleTools, Security, Security Objects, Digital Certificates). The SSH certificate added through the Digital Certificates page contains both the public and private key data, identified by the Alias column value on the Digital Certificates page.  If using the SSHKEYALIAS URL property, the Property Value prompt displays only the list of SSH certificates that have been added to the Digital Certificates page. If you have added the SSH certificate using the Digital Certificates page, and you have assigned an SSH certificate to the SSHKEYALIAS URL property, the system ignores the PUBLICKEY and PRIVATEKEY properties, regardless of whether they refer to valid key files in the file system.  If you provided a password (or passphrase) when generating your SSH certificate, specify that value using the PASSWORDKEY URL property.  See <i>PeopleTools: Security Administration</i> , "Configuring Digital Certificates."
USER	Specify the user ID to be authenticated.

8. If you need to specify an encrypted password in any of the property fields, use the Password Encryption area to generate the encrypted password, as follows:
- In the Password field, enter a password.
  - In the Confirm Password field, enter the password again.
  - Click Encrypt.

The encrypted password is displayed in the Encrypted Password field.

- d. From the Encrypted Password field, cut the encrypted password and then copy the encrypted value to the appropriate location.
9. Select Save to save your entries.
10. Click Validate to confirm that your entries are correct.

The validation confirms that the necessary parameters are present and correct, and simulates a file transfer with the entered information. You either see a message that confirms the success of the validation, or a message that displays an error for missing parameters or an unsuccessful transfer simulation.

11. To add additional report nodes, click Add to return to the Search page.

## Task 10B-3-5: Setting Up the Distribution for Your Process Scheduler Server

To set up the Distribution Settings for your Process Scheduler Server:

1. Select PeopleTools, Process Scheduler, Servers.
2. Enter the Server Name (such as PSUNX). The Server Definition page appears.
3. Select the Distribution tab.

The screenshot shows the Oracle PeopleTools interface for configuring a server. The breadcrumb trail is: Favorites > Main Menu > PeopleTools > Process Scheduler > Servers. The Oracle logo and search bar are at the top. Below the search bar are links for 'Advanced Search' and 'Last Search Results'. The page has a navigation bar with 'New Window | Help | Personalize Page | [icon]'. The main content area has tabs for 'Server Definition', 'Distribution', 'Operation', 'Notification', and 'Daemon'. The 'Distribution' tab is selected. Underneath, it shows 'Server Name: PSUNX'. A section titled 'Server Distribution Details' contains the following fields: 'Distribution Node Name' with a text input and a magnifying glass icon; 'Maximum Transfer Retries' with a text input; 'Interval for Transfer Attempt' with a text input and the label 'seconds'; and 'Transfer System Files to Report Repository' with a checkbox. At the bottom of the form are buttons: 'Save', 'Return to Search', 'Notify', 'Add', and 'Update/Display'. Below the buttons is a breadcrumb trail: 'Server Definition | Distribution | Operation | Notification | Daemon'.

Server Definition page for PSUNX: Distribution tab

4. Click the lookup button for Distribution Node Name to display the report node names and select the name of the required report node.
5. Enter a number for the Maximum Transfer Retries. This is the maximum number of times the server can try to send a report before it errors out.
6. Enter the number of seconds for the Interval for Transfer Attempt field. This is the interval between attempts to send the report.



7. Select the check box Transfer Log Files to Report Repository if you want to transfer all log and trace files from processes that do not generate reports.
8. Click Save to save your entries.
9. If Process Scheduler is running, you must reboot for any new settings to take effect.

To view reports (log files or system files) from Report Repository, you need to pass the authentication. Report Repository should be treated as a separate PeopleSoft application. To navigate from PIA to Report Repository, you need to set up single signon in order to avoid getting a prompt for a second signon.

### Task 10B-3-6: Setting Up Sending and Receiving of Report Folders in the Report Manager

To be able to view reports in the Report Manager Explorer and List pages, you need to set up the sending and receiving of report folders in the Report Manager by activating the domain on which a sending and receiving server resides. Consult the documentation covering the PeopleSoft Integration Broker to learn how to activate the sending and receiving server domain.

See *PeopleTools: Integration Broker*.

See *PeopleTools: Integration Broker Service Operations Monitor*.

## Task 10B-4: Setting Up Process Scheduler Server Agent

This section discusses:

- Understanding Process Scheduler Server Agent
- Changing the Default Operating System
- Setting Up Your Environment
- Creating and Configuring a Process Scheduler Server
- Reconfiguring a Process Scheduler Server
- Verifying the Process Scheduler Server Status

### Understanding Process Scheduler Server Agent

For installation purposes, you can use predefined server names and other definitions. The predefined name that you might use is as follows:

Server Name	Operating System
PSUNIX	UNIX

To test this, use processes already defined in your PeopleSoft database. To set up a new server definition in your PeopleSoft database, refer to the *PeopleTools: Process Scheduler* product documentation.

**Note.** When creating multiple Process Scheduler Servers for the same database, each server must have a unique server name. For example, two Process Scheduler Servers, both named PSNT, cannot run against the same database.

## Task 10B-4-1: Changing the Default Operating System

By default, Process Scheduler is set up to run a process request from a Process Scheduler Server Agent started in a Microsoft Windows server when the value of the *ServerName* field in the Process Request Dialog page is left blank. If you plan to run all processes other than Microsoft Windows-based programs (such as nVision) from UNIX, you must change the default operating system.

---

**Note.** If you do not change the default operating system from Windows to UNIX and you do not plan to set up a Process Scheduler Server Agent in Microsoft Windows, process requests that are created will be directed to a Microsoft Windows-based operating system and will remain in the "Queued" status.

---

To change the default operating system for process requests that were not assigned a Process Scheduler Server Name:

1. Select PeopleTools, Process Scheduler, System Settings.
2. Under *Primary Operating System*, choose *UNIX* from the drop-down list.
3. Click on the *System Purge Options* tab. Enter the date for the next purge of process requests in the *Next Purge Date* field.
4. Enter the time for the next purge of process requests in the *Next Purge Time* field. The default time is 12:00:00AM.
5. Enter a *Recurrence* if you want to set a regular purging basis.
6. Choose *Save*.

## Task 10B-4-2: Setting Up Your Environment

Telnet to your UNIX system. Log in and ensure the following environment variables are set appropriately:

---

**Note.** The environment variables for Tuxedo must be set explicitly; they are not set by running `psconfig.sh`. These can be also set using the `.profile` file in the user's home directory.

---

- `$TUXDIR` must be set to the correct Oracle Tuxedo installation directory; for example:  

```
TUXDIR=/home/user/Oracle/tuxedo12cR1; export TUXDIR
```
- `$TUXDIR/lib` must be prepended to `LD_LIBRARY_PATH`, `LIBPATH`, or `SHLIB_PATH`, whichever is appropriate for your platform; for example:  

```
LD_LIBRARY_PATH=$TUXDIR/lib:$LD_LIBRARY_PATH; export LD_LIBRARY_PATH
```
- `$TUXDIR/bin` must be prepended to `PATH`; for example:  

```
PATH=$TUXDIR/bin:$PATH; export PATH
```

Alternatively, make sure the following environment variables are set in the profile file in the user's home directory:

If your application does not contain COBOL programs, you do not need to set the `$COBDIR` environment variables.

See "Preparing for Installation," Installing Supporting Applications.

- `$COBDIR` must be set to the Micro Focus Server Express installation; for example:  

```
COBDIR=/cobol/prod/svrex-5.1_wp6;export COBDIR
```
- `$COBDIR/lib` must be appended to `LD_LIBRARY_PATH`, `LIBPATH`, or `SHLIB_PATH`, whichever is

appropriate for your platform.

```
LD_LIBRARY_PATH=$LD_LIBRARY_PATH:$COBDIR/lib; export LD_LIBRARY_PATH
LIBPATH=$LIBPATH:$COBDIR/lib; export LIBPATH
SHLIB_PATH=$SHLIB_PATH:$COBDIR/lib; export SHLIB_PATH
```

- \$COBDIR/bin must be appended to the PATH; for example:

```
PATH=$PATH:$COBDIR/bin;export PATH
```

For required DB2CLI.INI and registry settings, consult the following.

See "Creating a Database," Fulfilling PeopleSoft Database Configuration Wizard Prerequisites.

To set the required DB2/LUW environment, run db2profile. Enter the following command:

```
cd <DB2_INSTANCE_DIRECTORY>/sqlllib
. ./db2profile
```

To set the required PeopleSoft environment variables, run psconfig.sh. Go to the *PS\_HOME* directory and enter the following command:

```
. ./psconfig.sh
```

---

**Note.** After running psconfig.sh, you can invoke the PSADMIN utility from any location.

---

### Task 10B-4-3: Creating and Configuring a Process Scheduler Server

This section describes how to create and configure a Process Scheduler server.

You can set Process Scheduler configuration parameters either by using PSADMIN, which provides an interactive dialog, or by editing the configuration file psprcs.cfg located in the *PS\_CFG\_HOME/appserv/prcs/database name* directory. The following steps assume you are using PSADMIN to specify parameter settings.

---

**Note.** If you use the configuration file psprcs.cfg, be aware that in the PeopleSoft PeopleTools 8.49 release and later, the section [Output Dest Exceptions] has been modified to trap metastring exceptions not only in the output destination but in other process parameters as well. In this section the entry `OUTDEST_EXCEPT01=%ANYMETASTRING%` has been changed to `PARAMETER_EXCEPT01=%ANYMETASTRING%`.

---

To create and configure a Process Scheduler Server:

1. Run the psadmin command.

You see the PeopleSoft Server Administration menu, as in this example:

```
-----
PeopleSoft Server Administration
-----
PS_CONFIG_HOME      /home/JSMITH/psft/pt/8.56
PS_HOME             /home/PT856
PS_APP_HOME         /home/HC9.2

1) Application Server
2) Process Scheduler
3) Search Server
4) Web (PIA) Server
5) Switch Config Home
```

- 6) Replicate Config Home
- 7) Refresh Config Home
- q) Quit

Command to execute (1-7 q):

2. Depending on your environment, you may see a message after the menu selection, which indicates that PSADMIN has modified the *PS\_CFG\_HOME*/peopletools.properties file with the current *PS\_HOME* location:

```
*****
PS_CFG_HOME/peopletools.properties file has been updated.
You should use the Config Home Refresh feature in PSAdmin
to ensure that all of your domains are current.
Alternatively, you may recreate all of your domains.
Please press any key to continue...
*****
```

This indicates that one of these situations exists:

- The *PS\_CFG\_HOME* that you are working with was used previously from a different *PS\_HOME*. In this case, you should recreate any existing Application Server, Process Scheduler, Search, or PIA domains in this *PS\_CFG\_HOME*.
- You configured your environment such that *PS\_CFG\_HOME* is the same as *PS\_HOME*. The first time you use PSADMIN to create a domain, it updates the *PS\_CFG\_HOME*/peopletools.properties file. Continue with the next step.

3. Select 2 to access the Process Scheduler submenus.
4. Select 2 for Create a domain from the PeopleSoft Process Scheduler Administration menu.

```
-----
PeopleSoft Process Scheduler Administration
-----
1) Administer a domain
2) Create a domain
3) Delete a domain
4) Import domain configuration

q) Quit
```

Command to execute (1-4, q) : 2

5. Enter the name of the domain at the following prompt, such as HRDMO in this example, and press ENTER:

Please enter name of domain to create : **HRDMO**

6. After the system creates the domain, the Quick-configure menu appears:

```
-----
Quick-configure menu -- domain: HRDMO
-----

      Features                               Settings
      =====                               =====
1) App Engine       : Yes      9) DBNAME          : [HRDMO]
2) Master Scheduler : Yes     10) DBTYPE         : [DB2UNIX]
3) Perf Collator   : No      11) PrcsServer    : [PSUNX]
4) Domains Gateway : No     12) UserId        : [QEDMO]
```

```
5) Push Notifications: No      13) UserPswd      : []
                                14) ConnectID     : [people]
                                15) ConnectPswd: []
                                16) Log/Output Dir: [%PS_SERVDIR%/log_⇒
output]
                                17) SQRBIN              : [%PS_HOME%/bin/sqr/DB2⇒
/bin]
                                18) AddToPATH           : [%PS_HOME%/cblbin]
                                19) DomainConnectPswd: []
```

Actions

=====

- 6) Load config as shown
- 7) Custom configuration
- 8) Edit environment settings
- h) Help for this menu
- q) Return to previous menu

HINT: Enter 9 to edit DBNAME, then 6 to load

Enter selection (1-18, h, or q):

7. If you need to modify any of these settings, enter the number next to the parameter name, type the new value, and press ENTER. This table lists the parameters and gives brief descriptions.

Parameter	Description
Master Scheduler	Select this option to enable the Master Scheduler Server (PSMSTPRC). The default is to enable the server.  See <i>PeopleTools: Process Scheduler</i> .
App Engine	Select this option to initiate Application Engine programs through the AE Tuxedo Server (PSAESRV). The default is set to run AE using PSAESRV.  See <i>PeopleTools: Process Scheduler</i> .
Perf Collator	Select this option to enable the PSPPMSRV server process.  See <i>PeopleTools: Performance Monitor</i> , "Enabling the Required Elements on the Monitoring System."
Domain Gateways	Select this option to enables inter domain communication, for example between Application Server and Process Scheduler domains.  See <i>PeopleTools: Fluid User Interface Developer's Guide</i> , "Setting Up Push Notification Configurations."
Push Notifications	Select this option to enables pushing server events from PeopleSoft PeopleTools server runtime, such as Application Server and Process Scheduler, to browser clients and other PeopleSoft PeopleTools server runtime components.  See <i>PeopleTools: Fluid User Interface Developer's Guide</i> , "Setting Up Push Notification Configurations."
Load config as shown	Load the selections you made in the Quick Configure menu.
Custom configuration	Make custom selections in PSADMIN, using options that are not available in the Quick Configure menu.
Edit environment settings	Edit, add, remove, comment out, and review domain-level environment variables.
DBNAME	Specify the database name that is associated with a PeopleSoft Process Scheduler Server Agent, such as HRDMO, FSDMO, SADMO, and so on.
DBTYPE	Specify the database type: DB2UNIX (for DB2 for Linux, UNIX, and Windows).
PrCsServer	Specify the process server name. This must match the name defined in the Server Definition table, such as <i>PSNT</i> or <i>PSUNX</i> .

Parameter	Description
UserId	Enter the user ID, such as VP1 or PS.
UserPswd	Enter the password for the user ID, as you specified during the database configuration.  The password is hidden by masking characters as you type, in the Quick-configure menu after entry.
ConnectID	Enter the connect ID. This value is required.
ConnectPswd	Enter the connect password, as you specified during the database configuration. This value is required.  The password is hidden by masking characters as you type, in the Quick-configure menu after entry.
Log/Output Dir	Specify the directory in which files that are generated by the program are written. When PeopleSoft Process Scheduler initiates a process request, it creates a subdirectory in the format <Process Type ID>_<Program Name>_<Process Instance> that contains the generated files. For instance, the SQR program XRFWIN that ran with process instance 20 has all reports, trace, and log files in the subdirectory SQR_XRFWIN_20. It is also the optional directory used with the Output Destination field when scheduling a request. This variable (%%OutputDirectory%%) can be used in the File/Printer field of the Process Scheduler Request dialog box.
SQRBIN	Enter the path to the SQR executables.
AddToPATH	(Optional for Tuxedo) Specify an additional directory that is appended to the PATH environment variable.
DomainConnectPswd	If you configured your Application Server domain to require a Domain Connection password, enter it here. Otherwise, leave it blank.  The password is hidden by masking characters as you type, and in the Quick-configure menu after entry.  See the information on setting Application Server Domain Parameters in the <i>PeopleTools: System and Server Administration</i> product documentation.

For descriptions of the PSADMIN options that do not appear in the Quick-configure menu, see the information on using PSADMIN in the *PeopleTools: Process Scheduler* product documentation. For a basic installation, in most cases you can accept the defaults.

8. When you have updated the settings as needed, choose 5, *Load config as shown*, from the Quick-Configure menu to save your settings to the Process Scheduler configuration file, `pstuxcfg`.
9. To start Process Scheduler, choose 1, for Administer Domain.
10. On the PeopleSoft Process Scheduler Administration menu, choose 1 for Boot this domain.

```
-----
PeopleSoft Process Scheduler Administration
-----
```

Domain Name: HRDMO

- 1) Boot this domain
- 2) Domain shutdown menu
- 3) Domain status menu
- 4) Configure this domain
- 5) TUXEDO command line (tmadmin)
- 6) Edit configuration/log files menu
- 7) Clean IPC resources of this domain
- q) Quit

Command to execute (1-7, q) :

11. Choose 1, Boot (Serial Boot), or 2, Parallel Boot, from the PeopleSoft Domain Boot Menu.

---

**Note.** The messages you see and the number of processes started will depend on the options you chose during configuration.

---

12. If you want to stop Process Scheduler Server, from the PeopleSoft Domain Administration menu, choose 2, for Domain Shutdown menu, and then enter the number corresponding to the name of the appropriate database.

---

**Note.** If you see the following message, then the server is already down:

```
Command to execute (1-2, q) [q]: 1 Loading command line administration
utility ... tmadmin - Copyright (c) 2007-2008, Oracle. Portions *
Copyright 1986-1997 RSA Data Security, Inc. All Rights Reserved.
Distributed under license by Oracle. Tuxedo is a registered trademark. No
bulletin board exists. Entering boot mode. > TMADMIN_CAT:111: ERROR: No
such command.
```

---

## Task 10B-4-4: Reconfiguring a Process Scheduler Server

If you create and then immediately configure a Process Scheduler server, you can use the Quick-configure menu. Alternatively, you can use PSADMIN as described in this section. Feel free to skip this procedure if you have already created and configured your Process Scheduler Server using the Quick-configure menu and want to move forward with your installation.

---

**Note.** If you want to configure the Process Scheduler Server while it is running, you need to stop and restart the server to load the new settings.

---

To reconfigure a Process Scheduler Server:

1. Run the command:

```
psadmin
```

2. Depending on your environment, you may see a message after the initial menu, which indicates that PSADMIN has modified the *PS\_CFG\_HOME*/peopletools.properties file with the current *PS\_HOME* location:



```

*****
PS_CFG_HOME/peopletools.properties file has been updated.
You should use the Config Home Refresh feature in PSAdmin
to ensure that all of your domains are current.
Alternatively, you may recreate all of your domains.
Please press any key to continue...
*****

```

This indicates that one of these situations exists:

- The *PS\_CFG\_HOME* that you are working with was used previously from a different *PS\_HOME*. In this case, you should recreate any existing Application Server, Process Scheduler, Search, or PIA domains in this *PS\_CFG\_HOME*.
  - You configured your environment such that *PS\_CFG\_HOME* is the same as *PS\_HOME*. The first time you use PSADMIN to create a domain, it updates the *PS\_CFG\_HOME/peopletools.properties* file. Continue with the next step.
3. Select 2 for Process Scheduler in the PeopleSoft Server Administration menu.
  4. In the PeopleSoft Process Scheduler Administration menu, select 1 for Administer a domain.
  5. Select the database for which the Process Scheduler needs to be configured.
  6. You see the following prompt:

```
Do you want to change any config values (y/n)? [n]:
```

Specify *y* to start an interactive dialog that lets you examine or change parameter values.

7. Specify the configuration parameters one by one.

Configuration parameters are grouped into sections. At each section, you are asked whether to change any parameters—for example:

```
Values for config section - Startup
```

```

DBName=
DBType=
UserId=
UserPswd=
ConnectId=
ConnectPswd=
ServerName=
StandbyDBName=
StandbyDBType=
StandbyUserId=
StandbyUserPswd=
InMemoryDBName=
InMemoryDBType=

```

```
Do you want to change any values (y/n)? [n]:
```

- Specify *y* to change any parameter values for the current section. You are prompted for each parameter value. Either specify a new value or press ENTER to accept the default. After you press ENTER, you are positioned at the next parameter in that section. When you are done with that section, you are again asked whether you want to re-edit any of the values you changed.
- The parameters StandbyDBName, StandbyDBType, StandbyUserID, and StandbyUserPswd are used for a standby database in an Oracle database environment.

See the information on implementing Oracle Active Data Guard in the *PeopleTools: Data Management*, product documentation.

- The parameters `InMemoryDBName` and `InMemoryDBType` are reserved for internal use.
  - If you do not want to change any values, specify `n` and you are prompted for the next configuration section.
8. After you have selected all your parameters, you see this message:
- ```
You will need to shut down and start up the server to read the new⇒
settings.
```

For descriptions of the Process Scheduler options in the PSADMIN, see the *PeopleTools: Process Scheduler* product documentation. In most cases you can accept the defaults.

## Task 10B-4-5: Verifying the Process Scheduler Server Status

At this stage it is a good idea to verify the Process Scheduler Server status.

To verify the Process Scheduler Server status:

1. From the PeopleSoft Process Scheduler Administration menu, choose option 3, for Domain status menu.

```
-----
PeopleSoft Process Scheduler Administration
-----
```

```
Domain Name: HRDMO
```

- ```
1) Boot this domain
2) Domain shutdown menu
3) Domain status menu
4) Configure this domain
5) TUXEDO command line (tmadmin)
6) Edit configuration/log files menu
7) Clean IPC resources of this domain
q) Quit
```

```
Command to execute (1-7, q) : 3
```

2. To verify the status of the Process Scheduler Server for a specific database, type the number corresponding to the appropriate database.

For example:

```
Database list:
```

- ```
1) HRDMO
```

```
Select item number to start: 1
```

```
Loading command line administration utility ...
tmadmin - Copyright (c) 2007-2008 Oracle.
Portions * Copyright 1986-1997 RSA Data Security, Inc.
All Rights Reserved.
Distributed under license by Oracle.
Tuxedo is a registered trademark.
```

```
> Prog Name      Queue Name  Grp Name      ID RqDone Load Done Current⇒
```

```

Service
-----
-----
DDL                46845      pt-ibm20      0      9      450 ( IDLE )
PSMONITORSRV      MONITOR    MONITOR       1      0      0 ( IDLE )
PSAESRV           00101.00001 AESRV         1      0      0 ( IDLE )
PSAESRV           00101.00002 AESRV         2      0      0 ( IDLE )
PSAESRV           00101.00003 AESRV         3      0      0 ( IDLE )
PSPRCSRV          SCHEDQ     BASE          101    0      0 ( IDLE )
PSMSTPRC          MSTRSCHQ   BASE          102    0      0 ( IDLE )
PSDSTSRV          DSTQ       BASE          103    0      0 ( IDLE )
>

```

---

**Note.** You can also do this using the following command line argument:

```
psadmin -p status -d <DBNAME>
```

---

**Note.** You can also verify the status of the Process Scheduler Server from Process Monitor in PeopleSoft Pure Internet Architecture. To verify the Process Scheduler Server status from the Process Monitor page, go to PeopleTools, Process Scheduler, Process Monitor, and select *Server List*.

---



# Part II

## **Discretionary Installation**

---

The second part of the installation guide includes optional tasks, tasks that are only required by certain environments, and those that you may decide to defer until after the initial installation.



## Chapter 11A

# Installing and Compiling COBOL on Windows

This chapter discusses:

- Understanding COBOL
- Prerequisites
- Preparing COBOL for a PeopleTools-only Upgrade
- Installing Micro Focus Net Express on Microsoft Windows
- Managing Micro Focus Net Express Compiler Licenses
- Using the Micro Focus COBOL Compiler on Microsoft Windows

## **Understanding COBOL**

---

This chapter describes how to compile and link PeopleSoft COBOL batch programs, if necessary.

COBOL is not needed for PeopleSoft PeopleTools because the Process Scheduler is written in C++. In addition, COBOL is not required for PeopleSoft applications that contain no COBOL programs. See My Oracle Support for the details on whether your application requires COBOL.

The chapter includes instructions for the Micro Focus Net Express COBOL compiler.

### **See Also**

"Preparing for Installation," Installing Supporting Applications

PeopleSoft Enterprise Frequently Asked Questions About PeopleSoft and COBOL Compilers, My Oracle Support, (search for the article name)

PeopleSoft Enterprise Frequently Asked Questions About PeopleSoft and the IBM COBOL Compiler, My Oracle Support, (search for the article name)

PeopleTools Certifications - Suggested Fixes COBOL, My Oracle Support, (search for the article name and select the current release)

*PeopleTools: Global Technology*, "Understanding COBOL in a Unicode Environment"

## **Prerequisites**

---

Before you attempt to run COBOL from the command line you should do the following:

- Make sure the variable PS\_SERVER\_CFG points to a valid psprcs.cfg file.

- Make sure %PS\_HOME%\bin\server\winx86 is in your path. It should appear before %PS\_HOME%\bin\client\winx86 if that also appears in the path.
- Before compiling COBOL, you must obtain and install Perl on the machine used to compile COBOL. Perl is used to perform conversions on COBOL source files. Make sure the Perl installation location is included in the system's PATH environment variable. Contact the Perl vendor for installation and reference documentation.

## **Task 11A-1: Preparing COBOL for a PeopleTools-only Upgrade**

---

When performing a PeopleTools-only upgrade, if you have COBOL modules, recompile all PeopleSoft PeopleTools and PeopleSoft application COBOL programs, as explained in a later section.

Ensure that the following COBOL runtime files in your client and server bin directories match those of your Micro Focus Net Express installation:

- CBLINTS.DLL
- CBLRTSS.DLL
- CBLVIOS.DLL
- COB32API.DLL

See Recompiling COBOL on Microsoft Windows.

## **Task 11A-2: Installing Micro Focus Net Express on Microsoft Windows**

---

This section discusses:

- Prerequisites
- Obtaining Installation Files for Micro Focus Net Express from Oracle Software Delivery Cloud
- Installing Micro Focus Net Express Wrap Pack 6
- Installing Micro Focus Net Express Wrap Pack 14

### **Prerequisites**

Micro Focus® Net Express™ 5.1 Wrap Pack 14 is the supported COBOL compiler on Microsoft Windows for the current PeopleSoft PeopleTools release. This Wrap Pack is a product update and does require a previous version of the product to be installed. Micro Focus Net Express 5.1 Wrap Pack 14 can upgrade any of the following releases or any combination of these releases:

- Micro Focus Net Express 5.1 Wrap Pack 6
- Micro Focus Net Express 5.1 Wrap Pack 7
- Micro Focus Net Express 5.1 Wrap Pack 8
- Micro Focus Net Express 5.1 Wrap Pack 9
- Micro Focus Net Express 5.1 Wrap Pack 10
- Micro Focus Net Express 5.1 Wrap Pack 11
- Micro Focus Net Express 5.1 Wrap Pack 12



- Micro Focus Net Express 5.1 Wrap Pack 13

If you are running a Wrap Pack prior to Wrap Pack 6 or have no Net Express version installed, install Wrap Pack 6 before installing Wrap Pack 14.

See Installing Micro Focus Net Express Wrap Pack 6.

Check the certification information on My Oracle Support for the supported version for Microsoft Windows operating systems.

Note that Oracle is the exclusive reseller of the Micro Focus COBOL compiler for use with PeopleSoft applications.

## See Also

PeopleSoft Enterprise Frequently Asked Questions About PeopleSoft and COBOL Compilers, My Oracle Support, Doc ID 747059.1

Using the Micro Focus COBOL Compiler on Microsoft Windows

## Task 11A-2-1: Obtaining Installation Files for Micro Focus Net Express from Oracle Software Delivery Cloud

The Micro Focus Net Express installation files are available on Oracle Software Delivery Cloud. At this point you may have already downloaded the necessary files. This section includes additional information on finding and using the files for Micro Focus Net Express if necessary.

See "Preparing for Installation," Using Oracle Software Delivery Cloud to Obtain Installation Files.

See Oracle Software Delivery Cloud, <https://edelivery.oracle.com>.

To obtain the files for the Micro Focus Net Express installation:

1. Log in to Oracle Software Delivery Cloud at <https://edelivery.oracle.com>.
2. Enter Micro Focus in the type-ahead Product field, and select Micro Focus International Ltd. Net Express COBOL for Windows.

The product is added to the Download Queue.

3. Click Continue.
4. Click Continue.
5. Read the license agreement, select the check box to acknowledge that you accept the agreement, and then click Continue.
6. Click one of the filenames to download an individual zip file, or click Download All to obtain all of the files listed.

The files include software, wrap packs, and documentation. Save the zip files to a temporary directory on your local system. The directory where you save the zip files for both versions is referred to in this documentation as *NE\_INSTALL*. You must extract (unzip) each file on the platform for which it is intended. For example, if you download the zip file for Microsoft Windows, you must unzip it on Microsoft Windows to avoid problems.

## Task 11A-2-2: Installing Micro Focus Net Express Wrap Pack 6


The following procedure assumes that you saved the installation files from Oracle Software Delivery Cloud in the directory *NE\_INSTALL*.

**Note.** Micro Focus Net Express Wrap Pack 6 is a full product release and does not require a previous version of the product to be installed.

To install Micro Focus Net Express Wrap Pack 6:

1. Double-click *NE\_INSTALL/nxp3251060079.exe*.

If a security screen appears, click Run to launch the installer.

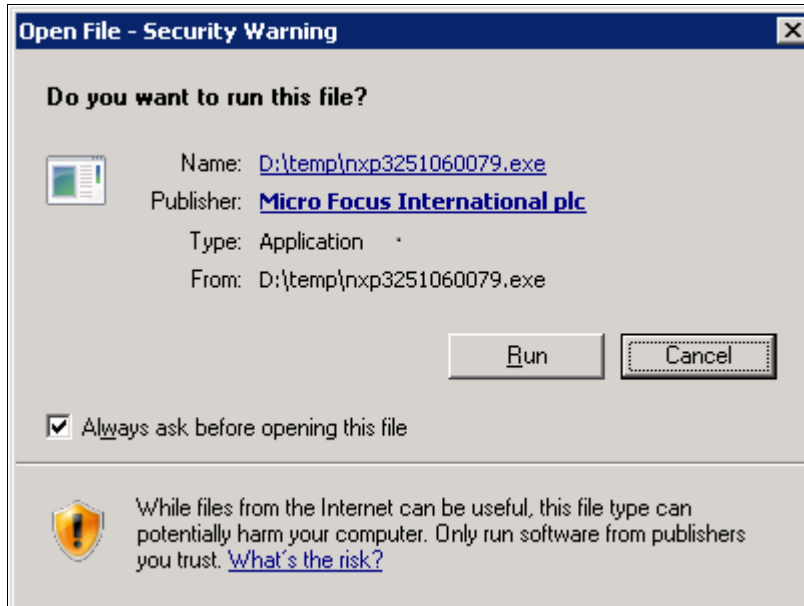


Open File - Security Warning for the Micro Focus installation executable

The Install Shield Wizard starts extracting files. This may take a few minutes until the files are extracted, and then the Installation Wizard dialog box appears.


2. Click Next on the welcome window.

The screen includes a button to open a Readme file.

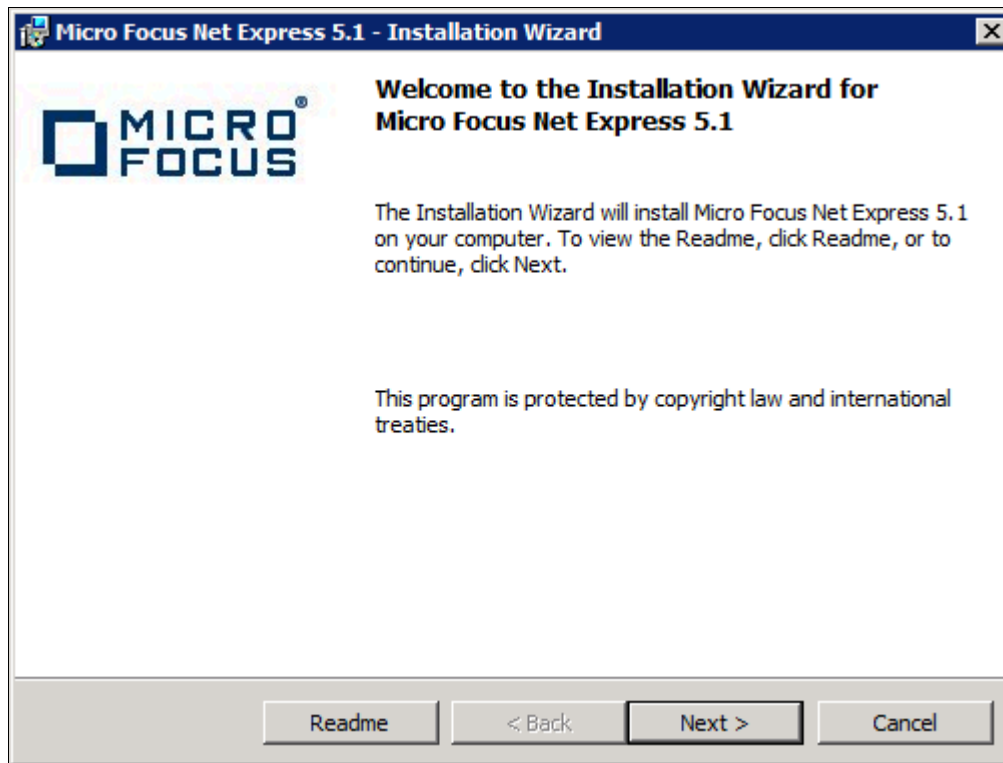

Micro Focus Net Express Installation Wizard Welcome window

3. Read the terms of the License Agreement, select the option to accept the terms, and click Next.

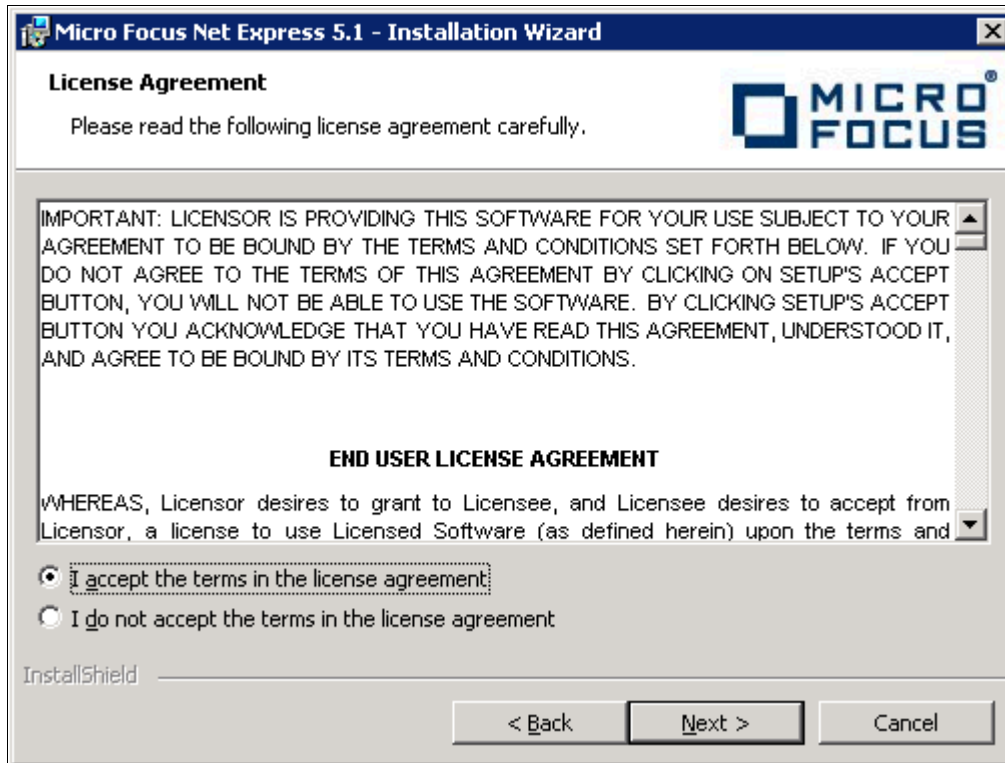

License Agreement window for Micro Focus Express


4. Complete the Customer Information window:
  - a. Enter your name in the User Name field, and enter your Company Name.  
In the example shown below, the user name is USER NAME, and the Company Name is ORACLE.
  - b. Leave the Serial Number and W.O. Number fields blank. Oracle does not provide these numbers to you and they are not required.

---

**Note.** The message at the top of the window reads "We STRONGLY recommend you enter your Serial Number and Works Order (W.O.) number here. You will need them later to obtain a full license key." The example here leaves these fields blank.

---


c. Click Next.

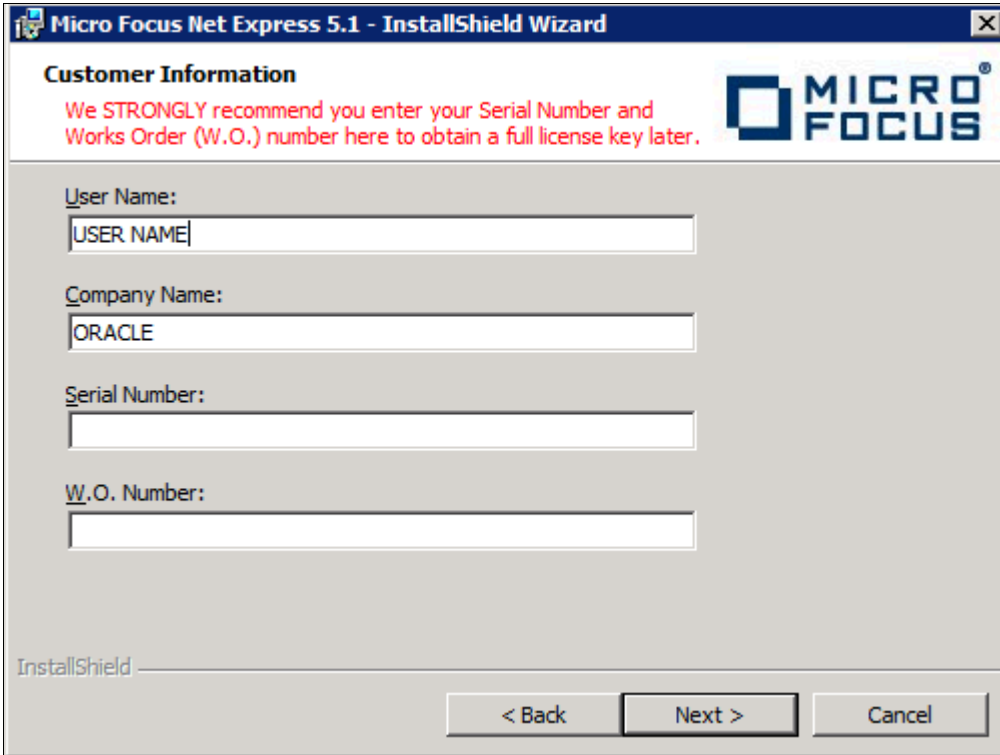

The screenshot shows a Windows installation wizard window titled "Micro Focus Net Express 5.1 - InstallShield Wizard". The window has a blue header bar with the title and a close button. Below the header, the text "Customer Information" is displayed in bold. A red message reads: "We STRONGLY recommend you enter your Serial Number and Works Order (W.O.) number here to obtain a full license key later." To the right of this message is the Micro Focus logo. The main area of the window contains four input fields: "User Name:" with the text "USER NAME", "Company Name:" with the text "ORACLE", "Serial Number:" which is empty, and "W.O. Number:" which is empty. At the bottom of the window, there are three buttons: "< Back", "Next >", and "Cancel". The "Next >" button is highlighted with a black border. The text "InstallShield" is visible in the bottom left corner of the window's content area.

Customer Information window


5. The Custom Setup window appears as in this example, with all of the options selected initially:

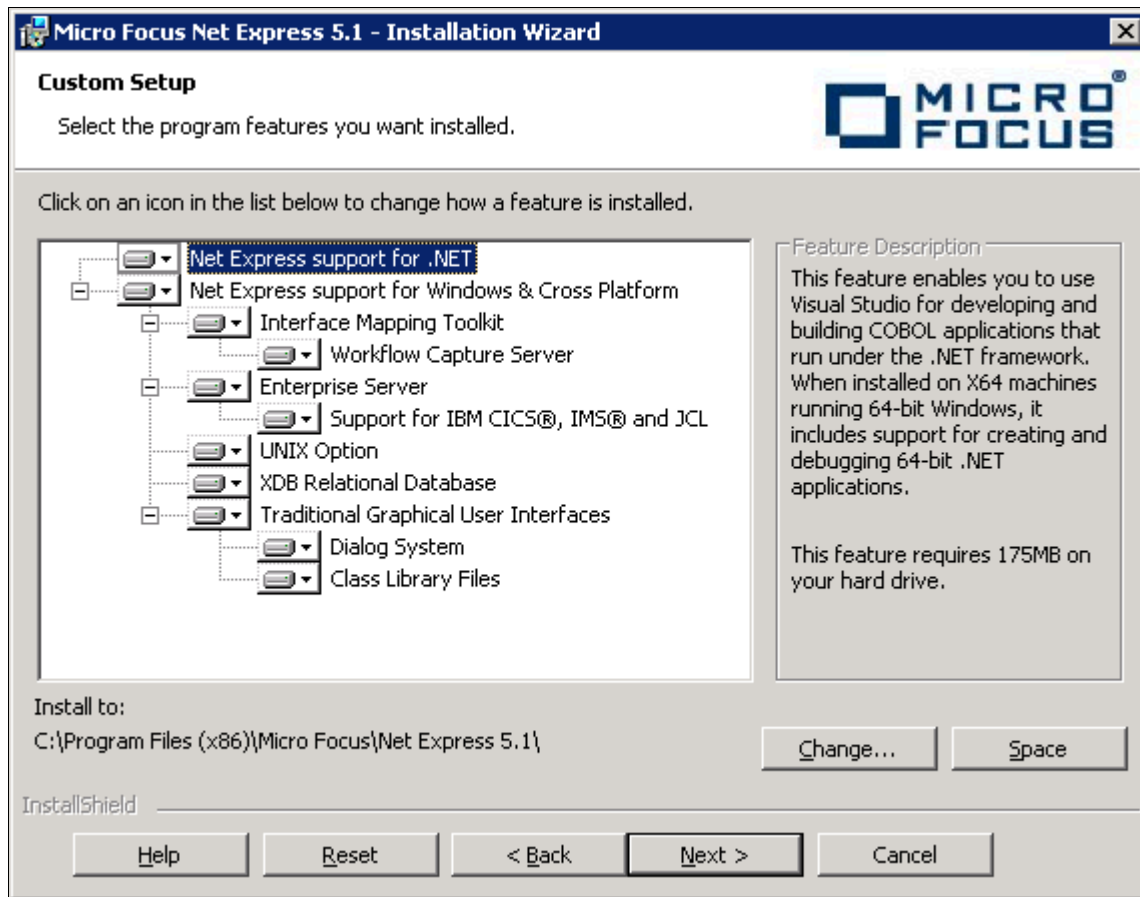

Custom Setup window before selecting features

6. You must clear several features on the Custom Setup window before proceeding.

You can turn off a feature by clicking on the drop-down button beside the feature and selecting the option "X This feature will not be available," as shown in this example:

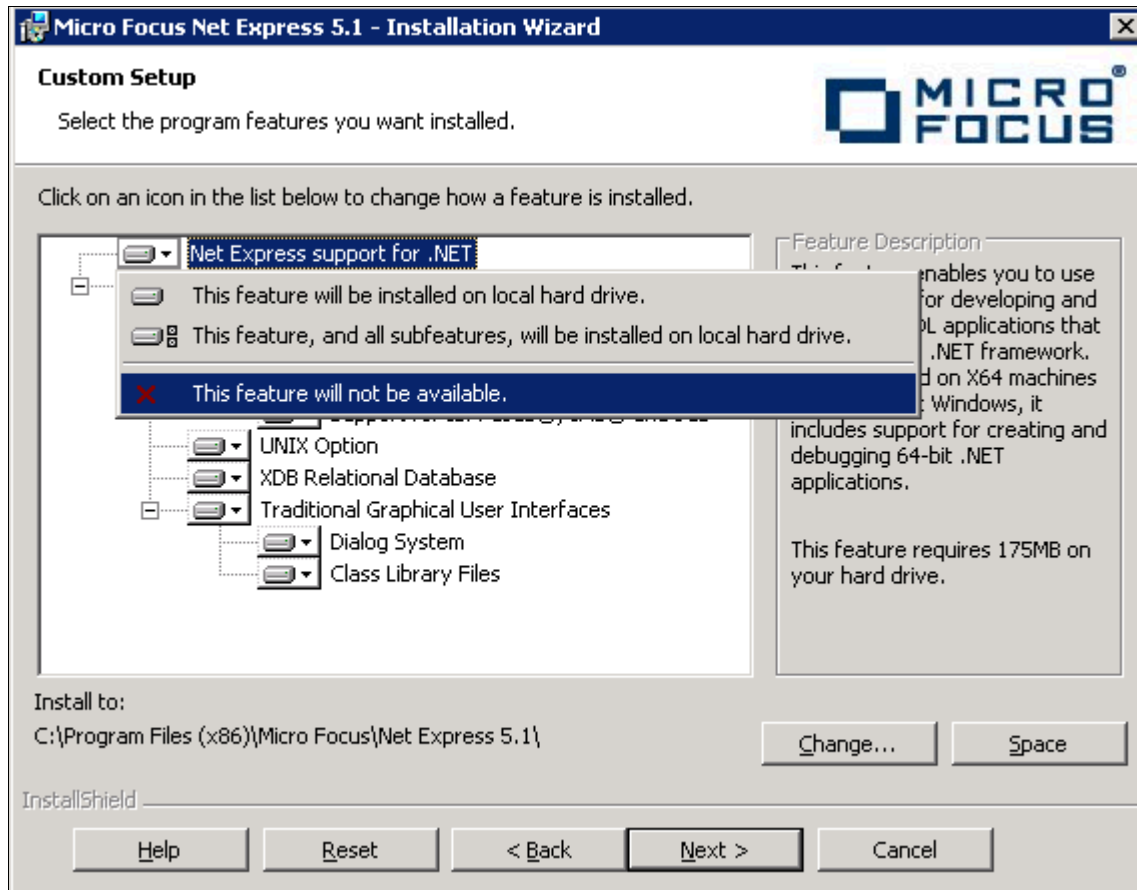

Custom Setup window displaying selection and deselection options

The Traditional Graphical User Interfaces feature is the only feature required for the PeopleSoft installation. (The Traditional Graphical User Interfaces feature also includes Dialog System and Class Library Files.) Clear the following features:

- Net Express support for .NET


---

**Note.** Microsoft .NET framework is not required for compiling and running COBOL applications in PeopleSoft architecture. Neither is .NET required for successful installation of MicroFocus Net Express 5.1.

---

- Interface Mapping Toolkit  
When you clear this feature, the Workflow Capture Server option is automatically cleared also.
- Enterprise Server
- UNIX Option
- XDB Relational Database

7. Verify that your final selection matches this example, with only Traditional Graphical User Interfaces, Dialog System, and Class Library Files, selected:

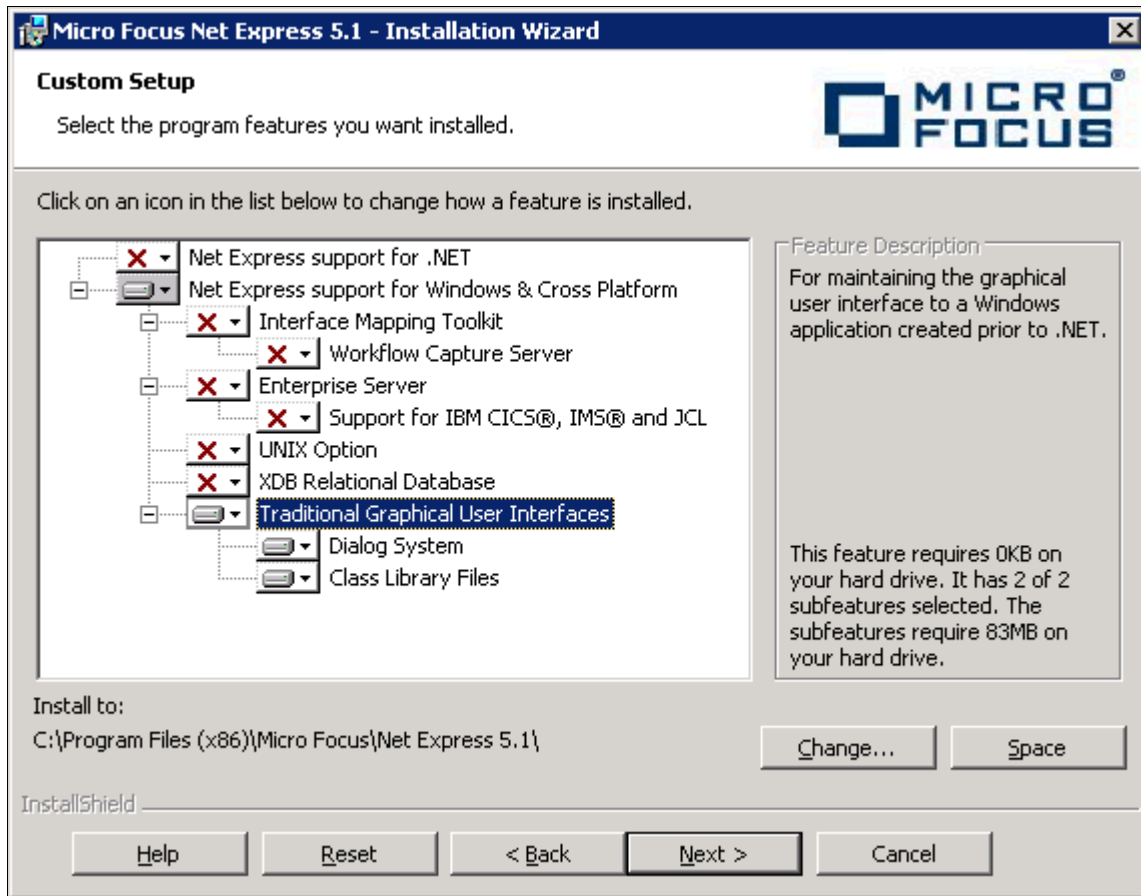

Custom Setup window with options selected for PeopleSoft applications

8. Highlight Traditional Graphical User Interfaces.


The installation directory is listed below the feature list. If you want to install to another location, click Change. If not, click Next.

This documentation refers to the installation directory as *NE\_HOME*. The Micro Focus Net Express 5.1 default installation directory, for 64-bit systems, is:

C:\Program Files (x86)\Micro Focus\Net Express 5.1




## 9. Click Install.

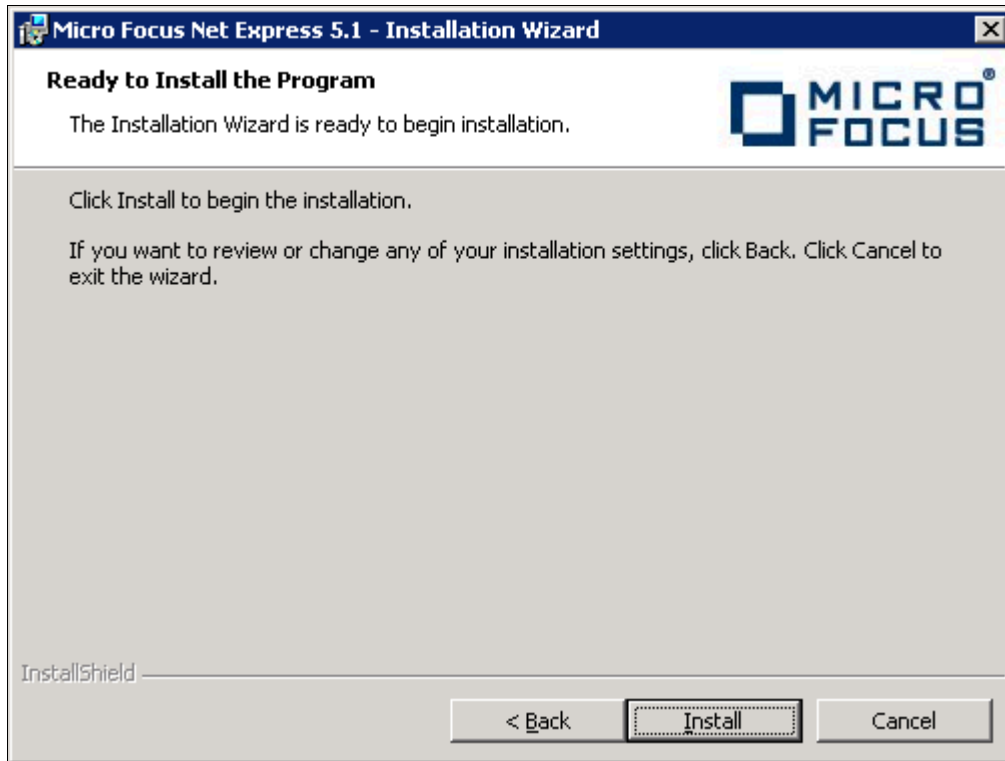


Micro Focus Net Express Installation window: Ready to Install the Program

The installation status window appears, tracking the installation progress.

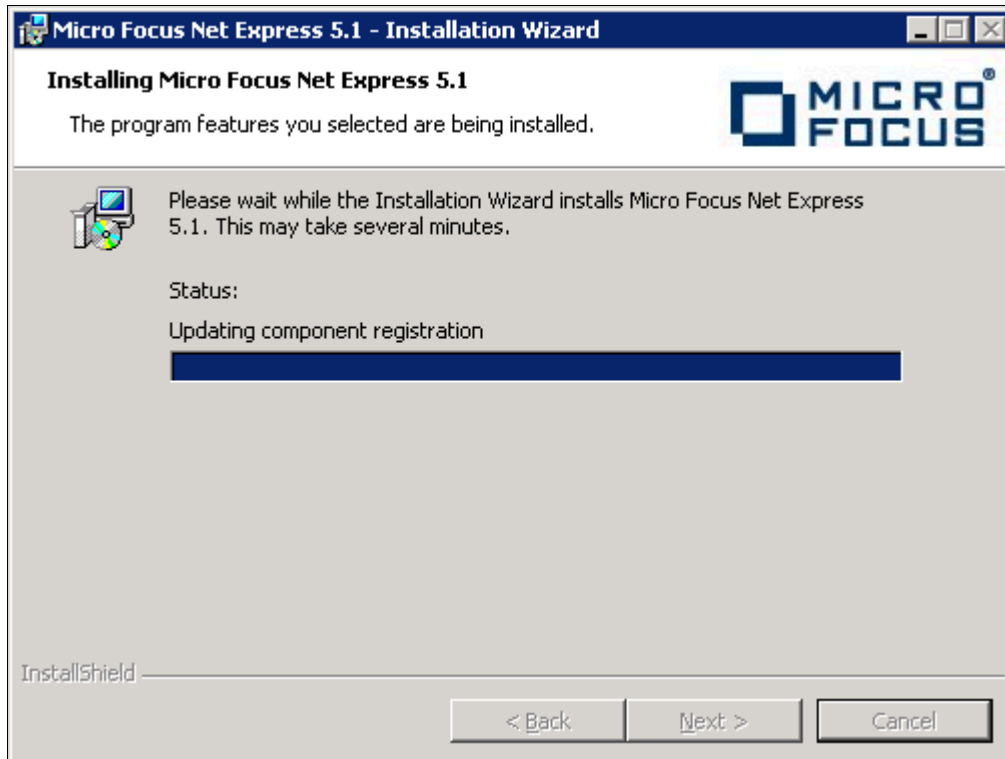


Installation status for the Micro Focus Net Express Installation

10. Click Finish.

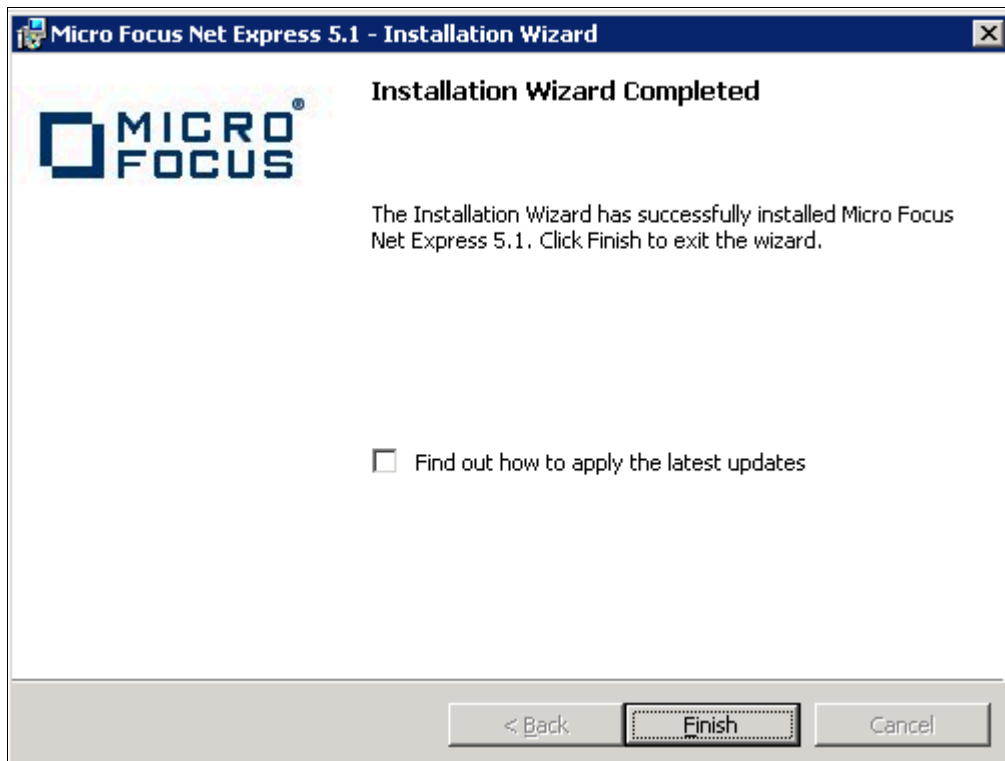

Installation Wizard Completed window


11. To confirm the installation, select Start, All Programs, Micro Focus Net Express 5.1, Net Express.

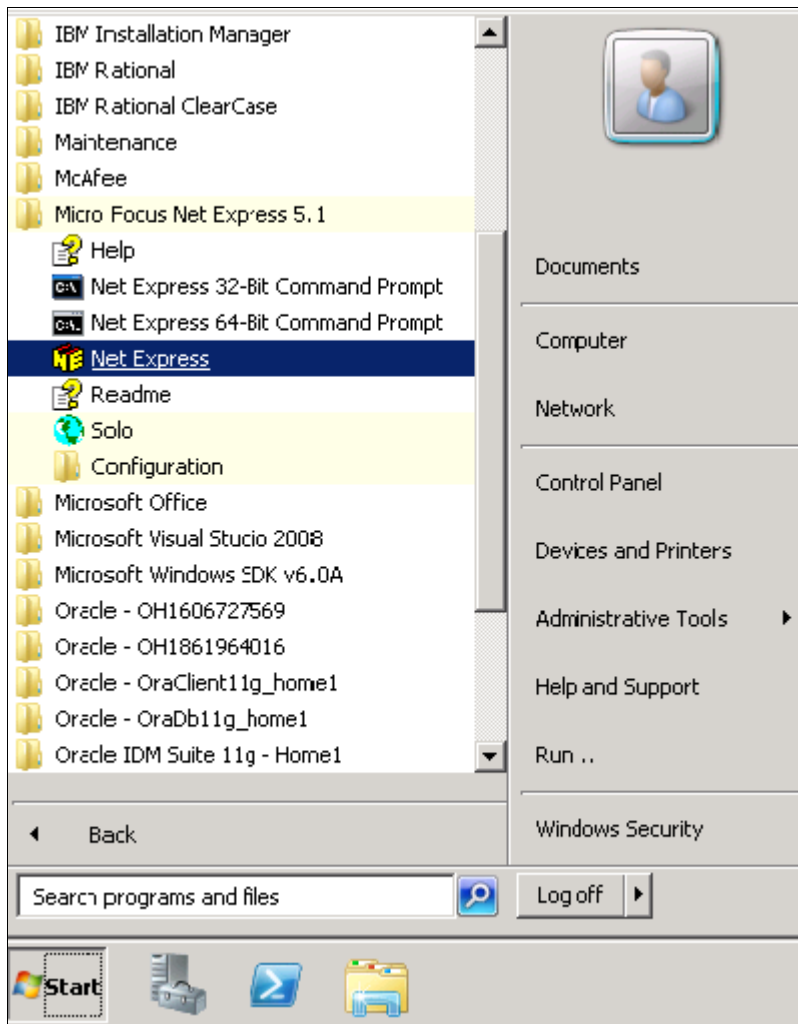

Selecting Micro Focus Net Express from the Microsoft Windows Start menu


The Net Express Integrated Development Environment (IDE) appears.

12. On the Micro Focus Management System dialog box, read the information under Current License Status, indicating that there is a 30-day license for the compiler that you installed.

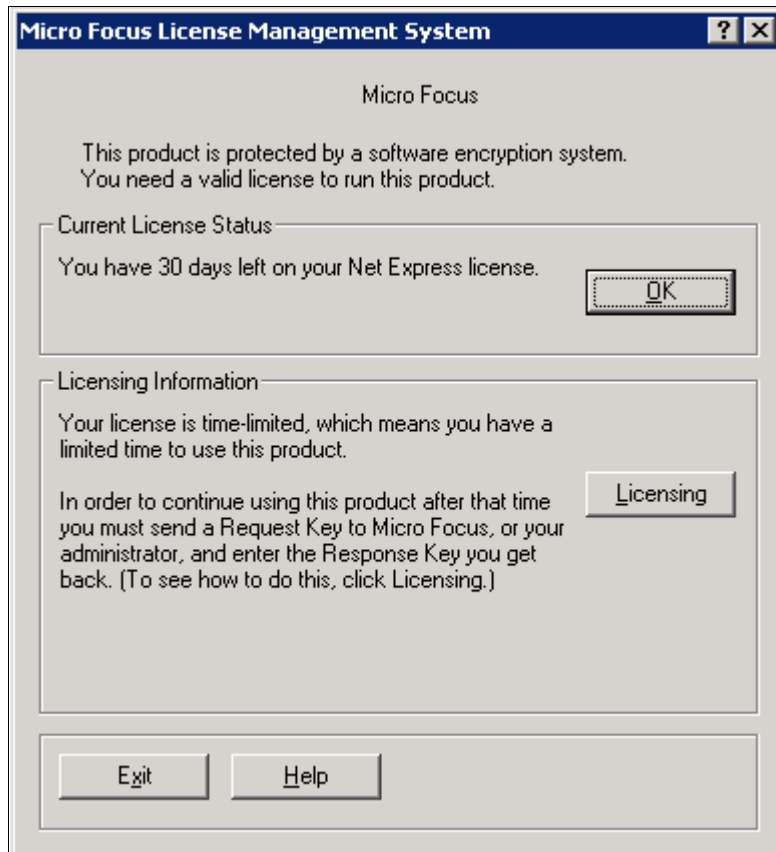

Micro Focus License Management System dialog box

13. Click Help, About Net Express.

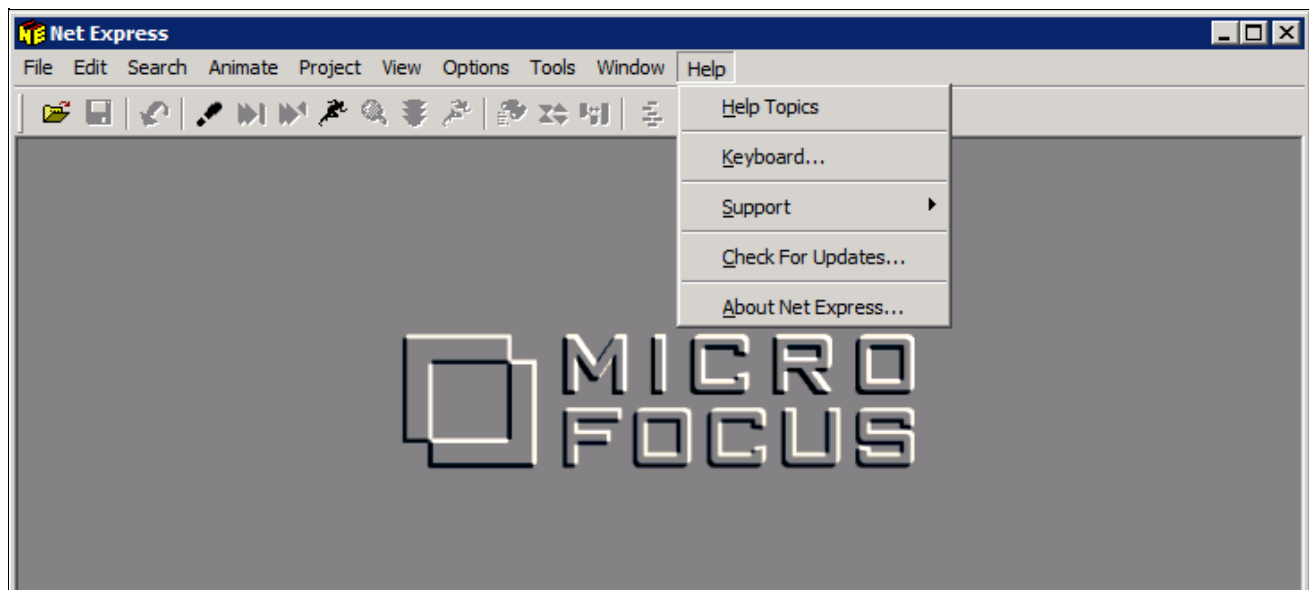


Micro Focus Net Express Integrated Development Environment Help menu

14. Verify that the following information is included on the message box that appears:

Net Express 5.1

Version: 5.106.0079

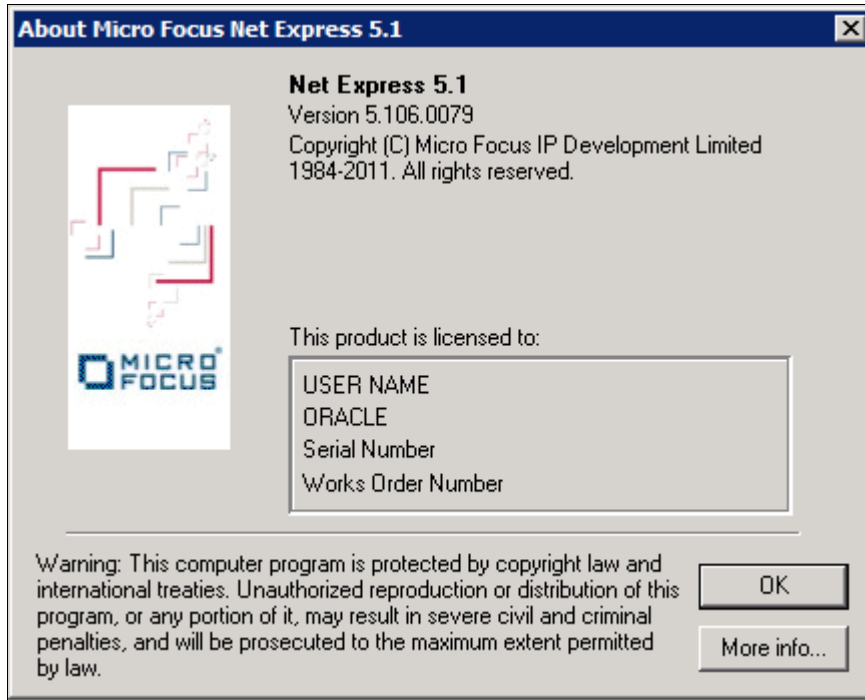

About Micro Focus Net Express window with version number


### Task 11A-2-3: Installing Micro Focus Net Express Wrap Pack 14

The following procedure assumes that you saved the installation files from Oracle Software Delivery Cloud in the directory *NE\_INSTALL*, and that Micro Focus Net Express Wrap Pack 6 or later is installed.

To update to Micro Focus Net Express Wrap Pack 14:

1. Double-click *NE\_INSTALL\nxp3251140045.msp*.


If a security screen appears, as in this example, click Open to launch the installer.

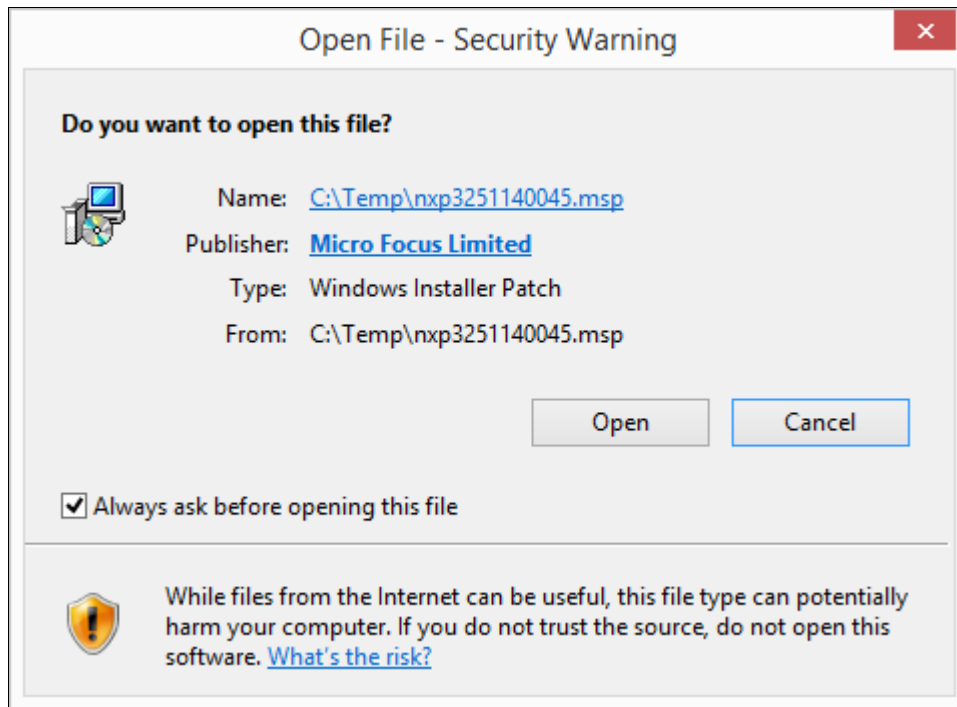

Open File - Security Warning dialog box


A Welcome window appears.

2. Click Update to continue, as in this example:

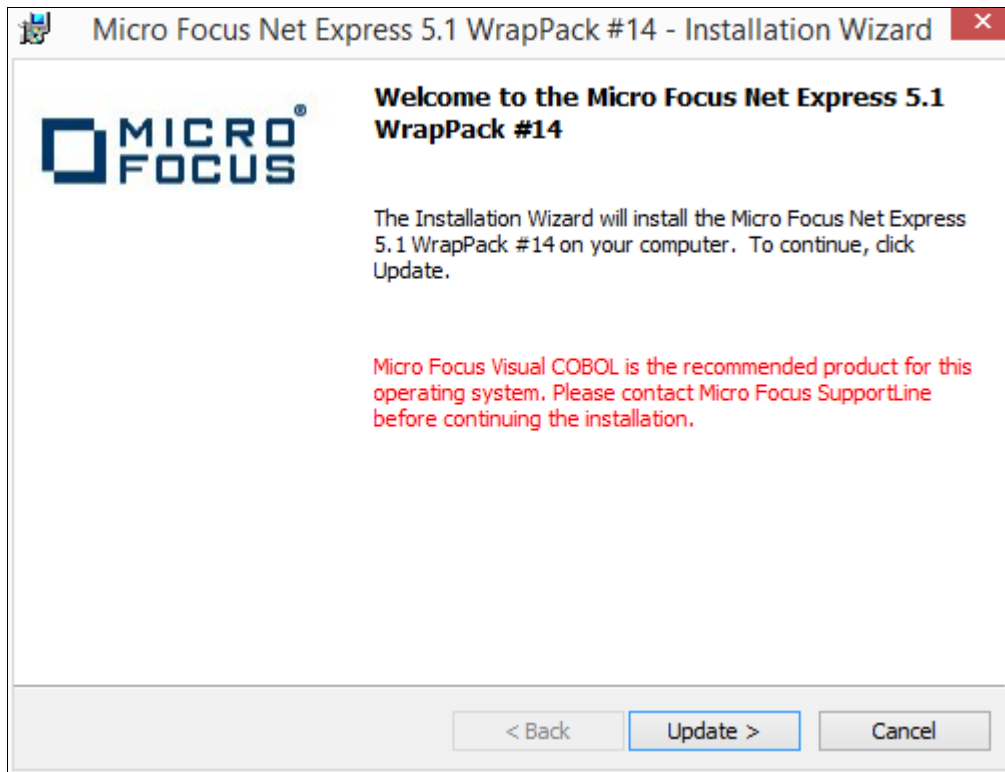


Welcome to the Micro Focus Net Express 5.1 WrapPack #14 window

You see a window indicating the progress of the installation.

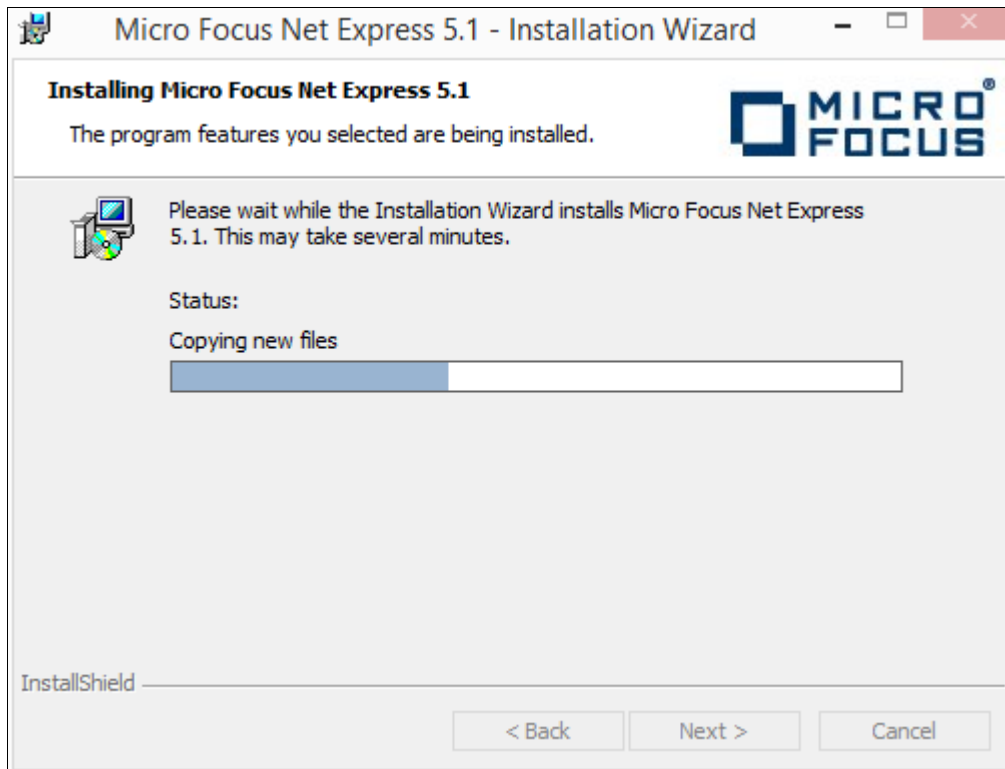

Micro Focus Net Express 5.1 Installation Wizard progress indicator

3. After the installation is complete, click Finish on the completion window, as in this example:

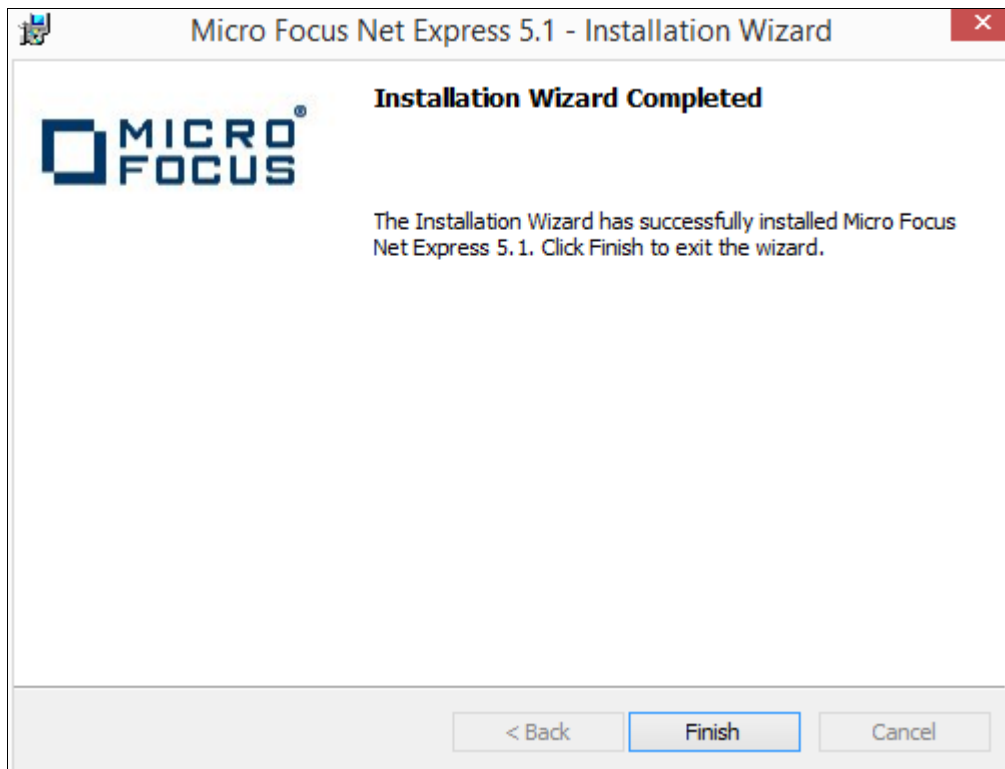

Installation Wizard Completed window




- To verify the installation, select Start, All Programs, Micro Focus Net Express 5.1, Net Express.  
Alternatively, you can run *NE\_HOME*\Base\Bin\MFNETX.EXE, where *NE\_HOME* refers to the directory where you installed Micro Focus Net Express, such as C:\Program Files\Micro Focus.

The Micro Focus Net Express 5.1 Integrated Development Environment (IDE) opens.

- On the Micro Focus License Management System dialog box, read the information under Current License Status.

In this example, the current license status indicates 29 days remaining on the license. Click OK.

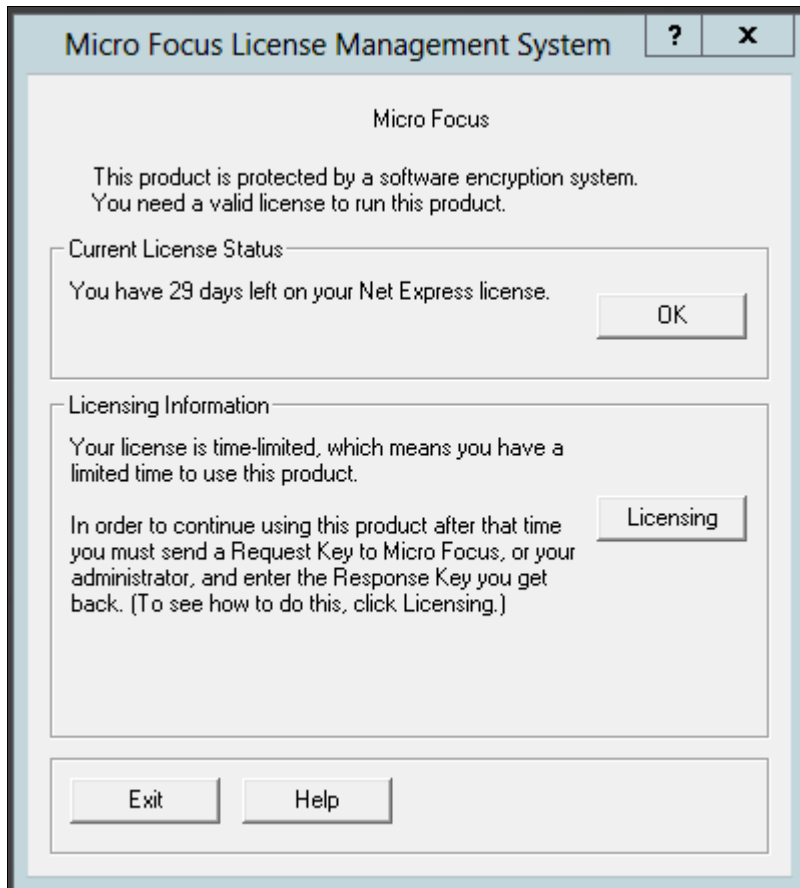

Micro Focus License Management System dialog box


- Click Continue on the Welcome to Micro Focus Net Express window.

## 7. Select Help, About Net Express.

Verify that the following information is included on the message box that appears:

Net Express 5.1

Version 5.114.0045

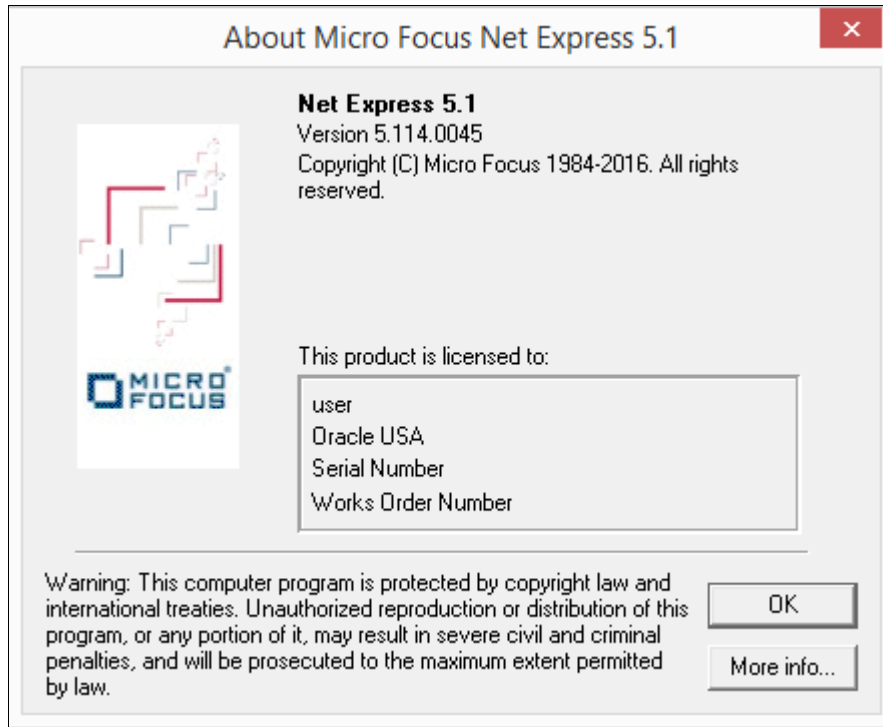

About Micro Focus Net Express 5.1 message box

## Task 11A-3: Managing Micro Focus Net Express Compiler Licenses

---

This section discusses:

- Understanding Micro Focus Net Express Compiler Licenses
- Configuring a Full License with the License Server
- Configuring a Timed License with the License Server
- Revoking the License Using the License Management System
- Revoking the License by Removing the Installation

### Understanding Micro Focus Net Express Compiler Licenses

The Micro Focus Net Express 5.1 Wrap Pack 14 compiler can be licensed with a Micro Focus License Server or with the Request Key/Response Key mechanism. This section discusses the License Server method, which Oracle recommends because it is more flexible and licensing is immediate. For more details, see the Micro Focus documentation.

There are two types of Micro Focus Net Express licenses. Here is a brief comparison:

- Timed License
  - Timed Licenses expire after the specified duration and can be renewed over the network.
  - Timed Licenses are the default given by the license server.
  - There are two types of Timed Licenses; one is valid for seven days, and other for one day.
- Full License
  - Full Licenses do not expire.
  - The user can request and revoke Full Licenses using the License Management System.

It is a good idea to use Timed Licenses, unless you have a compelling demand. Mostly developers who work with COBOL on a daily basis should use a Full License. If you require COBOL for a few compiles, and only for some days, use a Timed License. When the Timed License expires, you can renew it again.

### Task 11A-3-1: Configuring a Full License with the License Server

To configure a Full License for permanent use:


1. Select Start, All Programs, Micro Focus Net Express 5.1, Configuration, License Management System.

---

**Note.** Alternatively, run `NE_HOME\Bin\protcfg.exe`, where `NE_HOME` is the directory where you installed Micro Focus Net Express.


---

2. Select the option Use Network Licensing, and click Connection Wizard, as shown in this example:

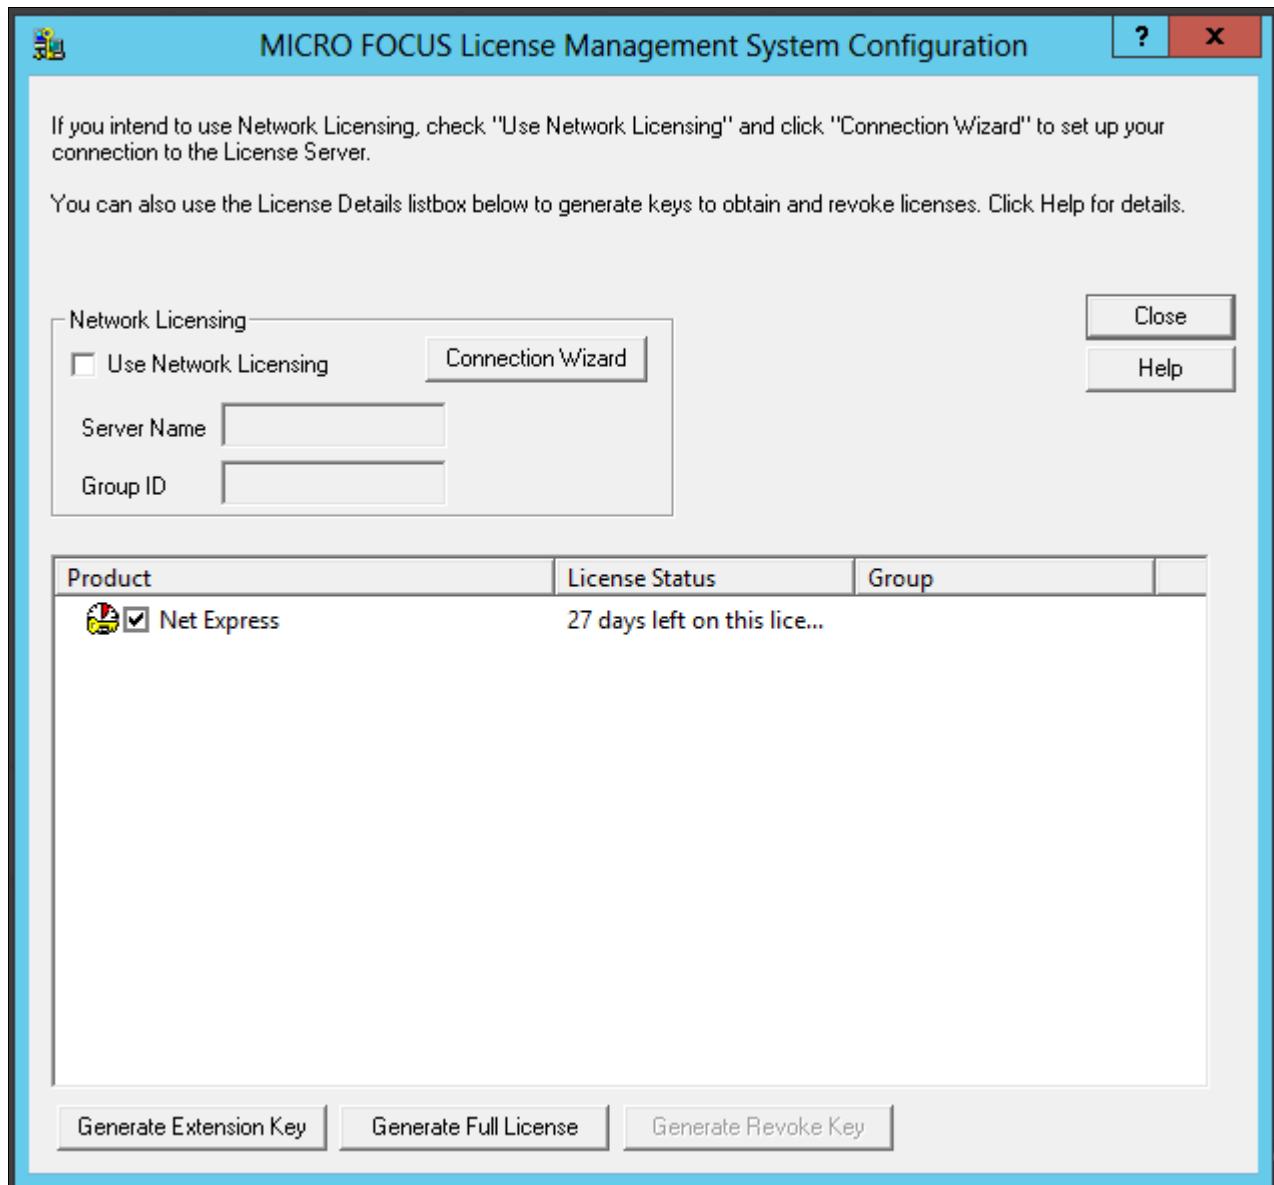


MICRO FOCUS License Management System Configuration window

3. Click Next on the License Server Connection Wizard window, shown in this example:

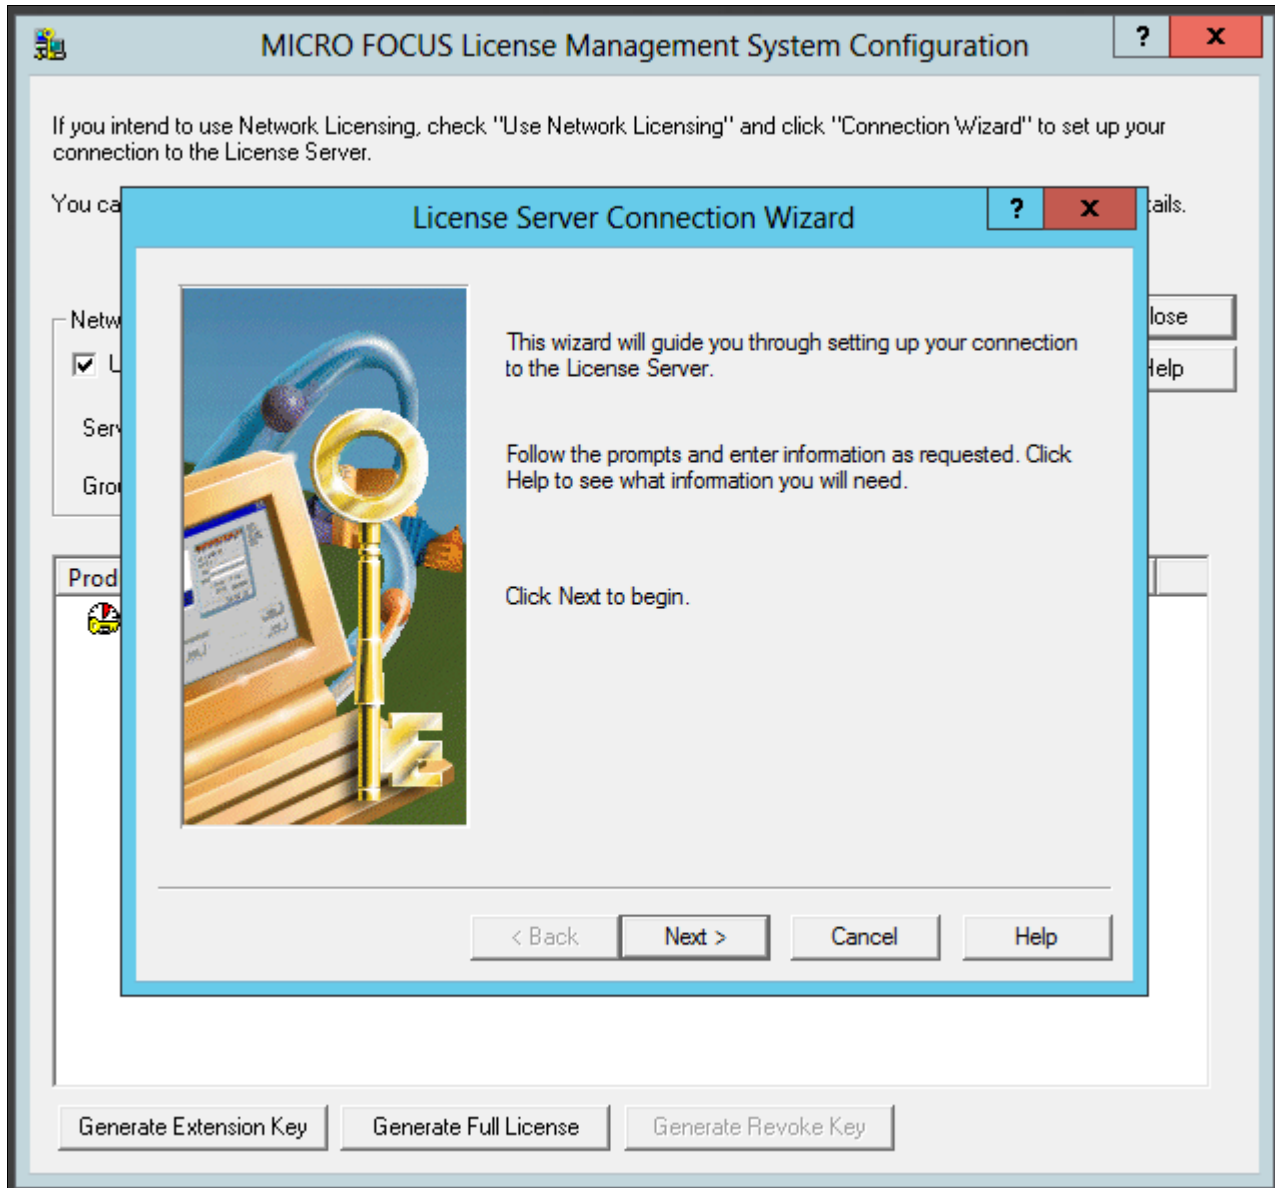

License Server Connection Wizard window

4. Enter information for the server location, and then click Next.

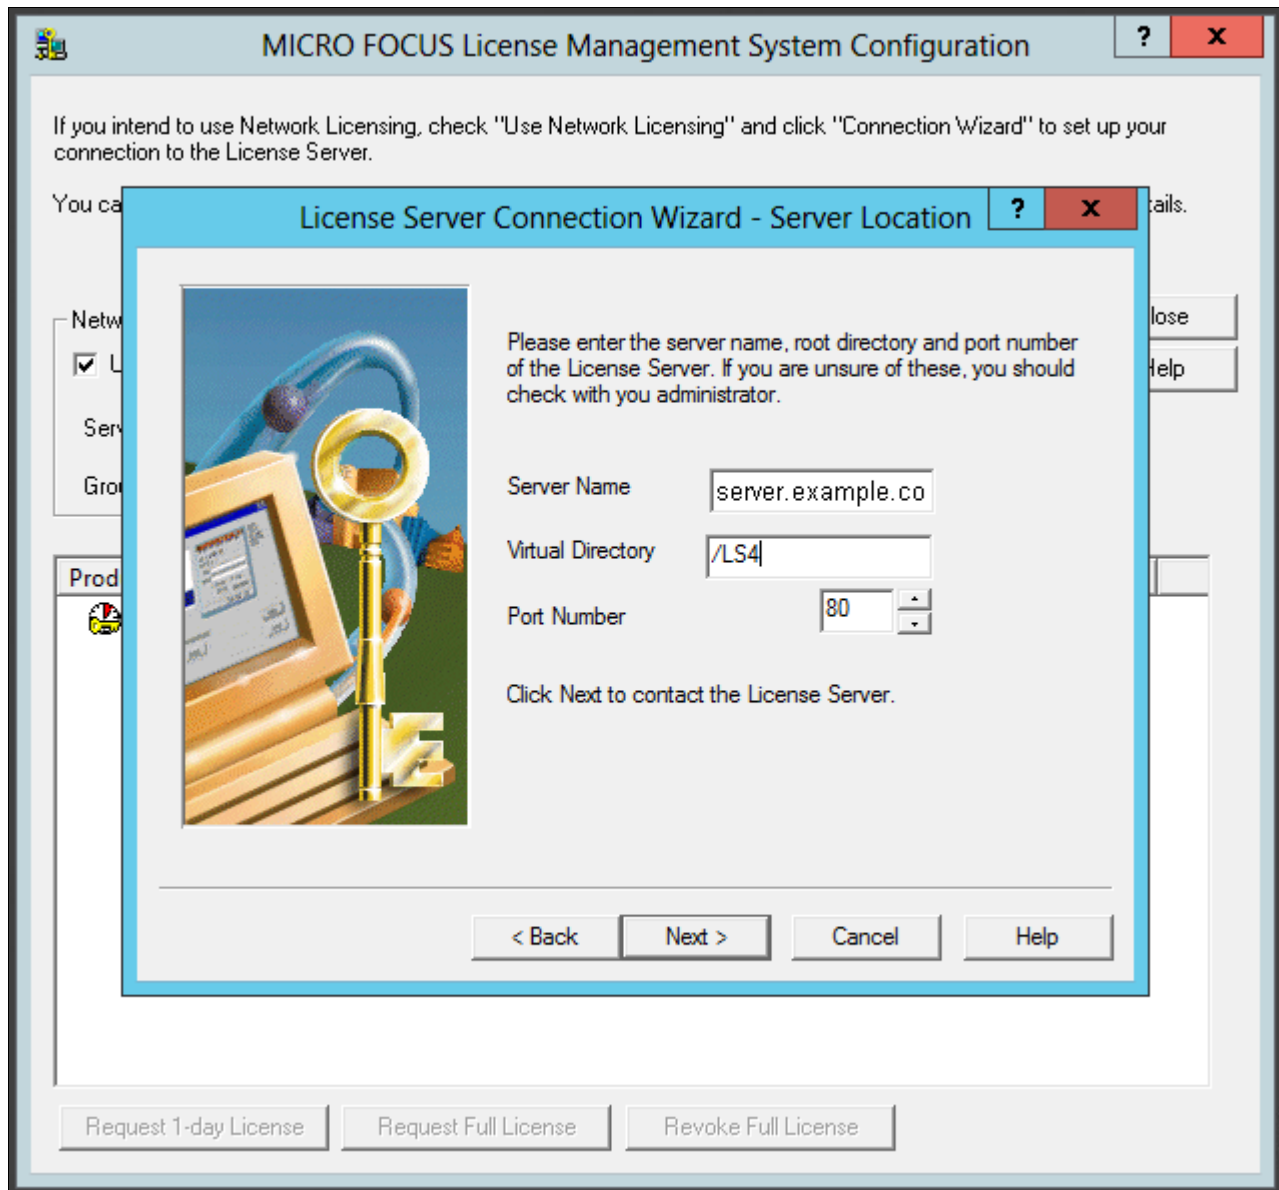


License Server Connection Wizard - Server Location window

- Server Name—Enter the name of the license server; for example, server.example.com.
- Virtual Directory; for example, /LS4.
- Port Number—The default is 80, as shown in the example. Select a port that is not in use by another application.

- 5. You see a message saying the wizard found the server, as in this example.

Click Next.

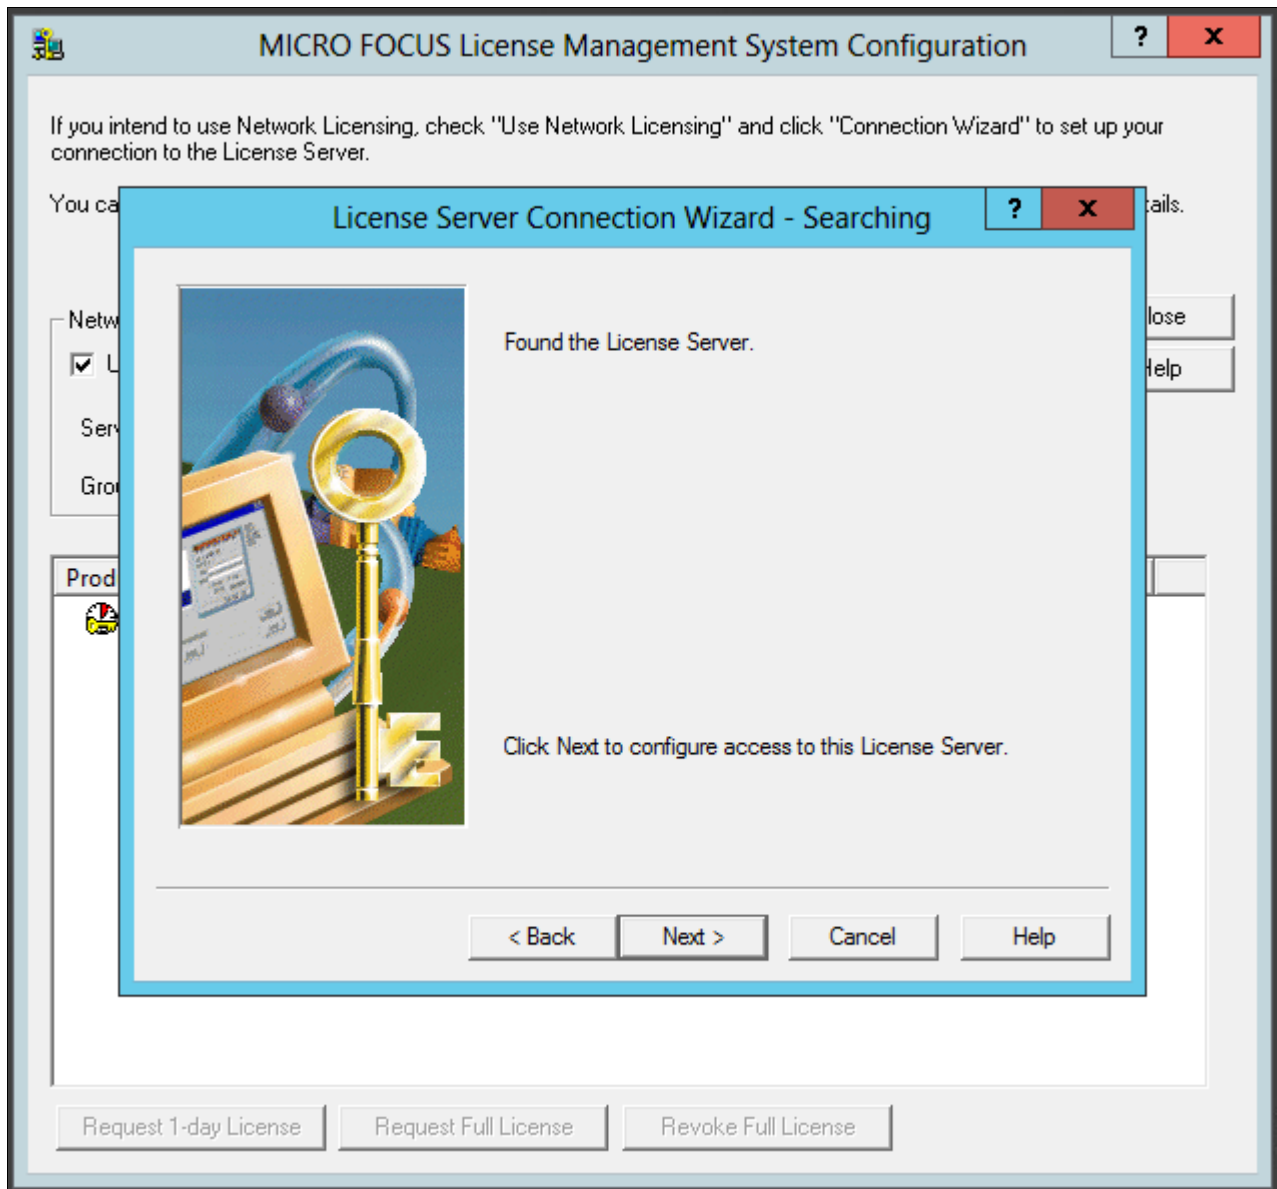


License Server Connection Wizard - Searching window

6. Enter your group ID, which is COBOL\_GROUP\_1 in this example, and 1 for the number of days before you have to renew the license.

**Note.** Although you enter one day here, you complete a step later that requests permanent license status.


Click Next.

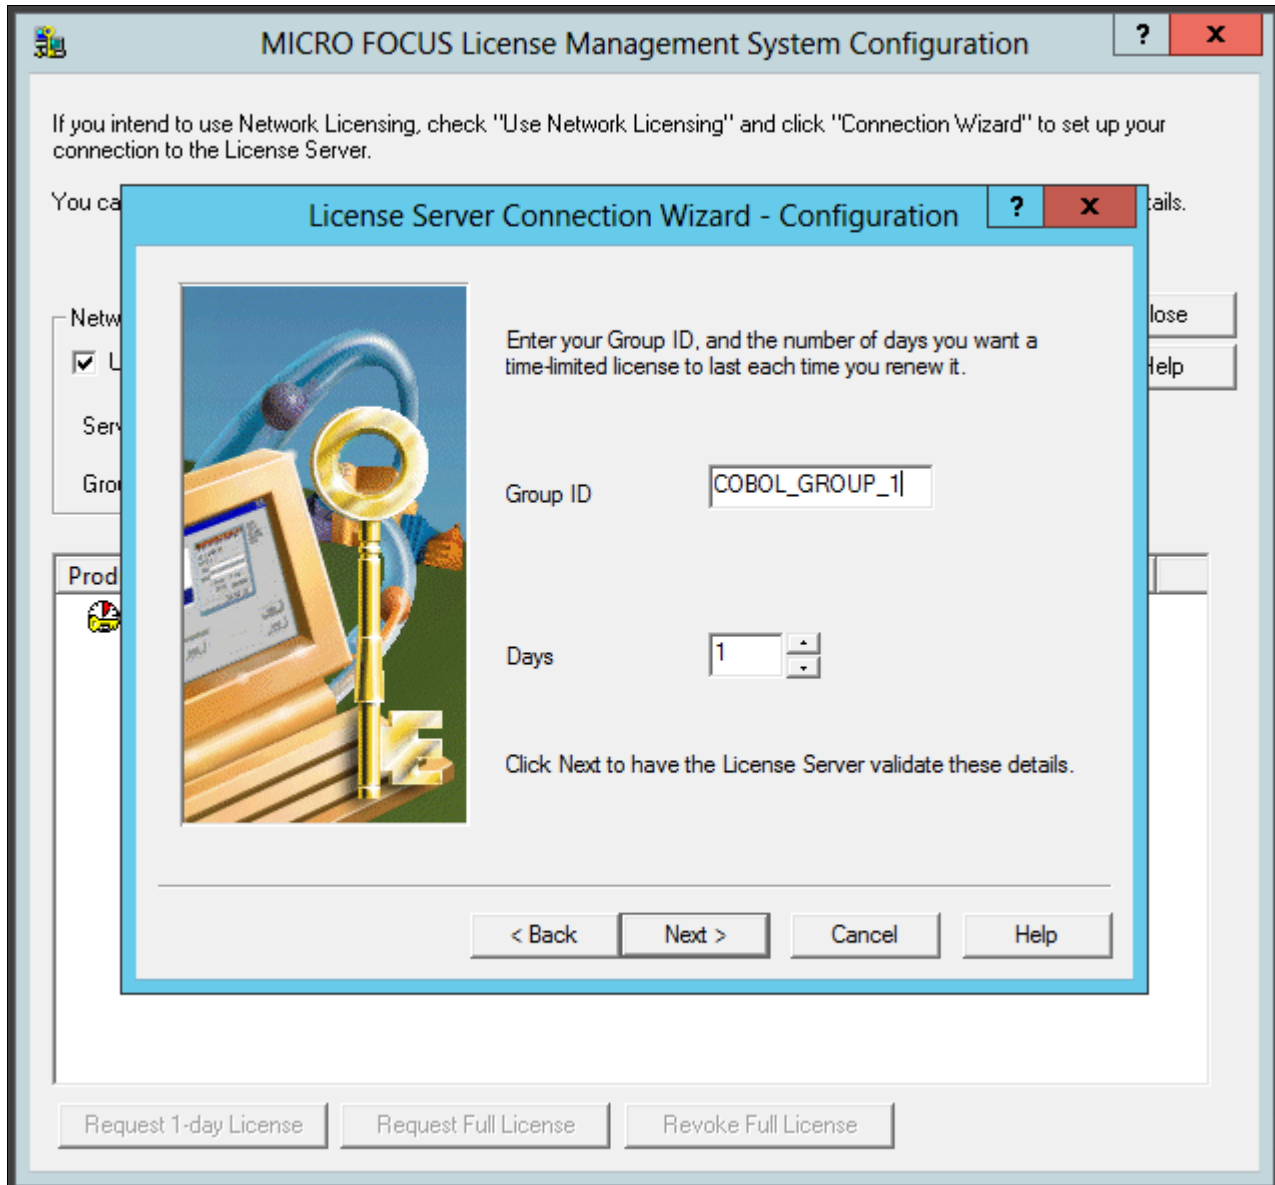

License Server Connection Wizard - Configuration window




7. Click Finish to exit the wizard, as shown in this example:

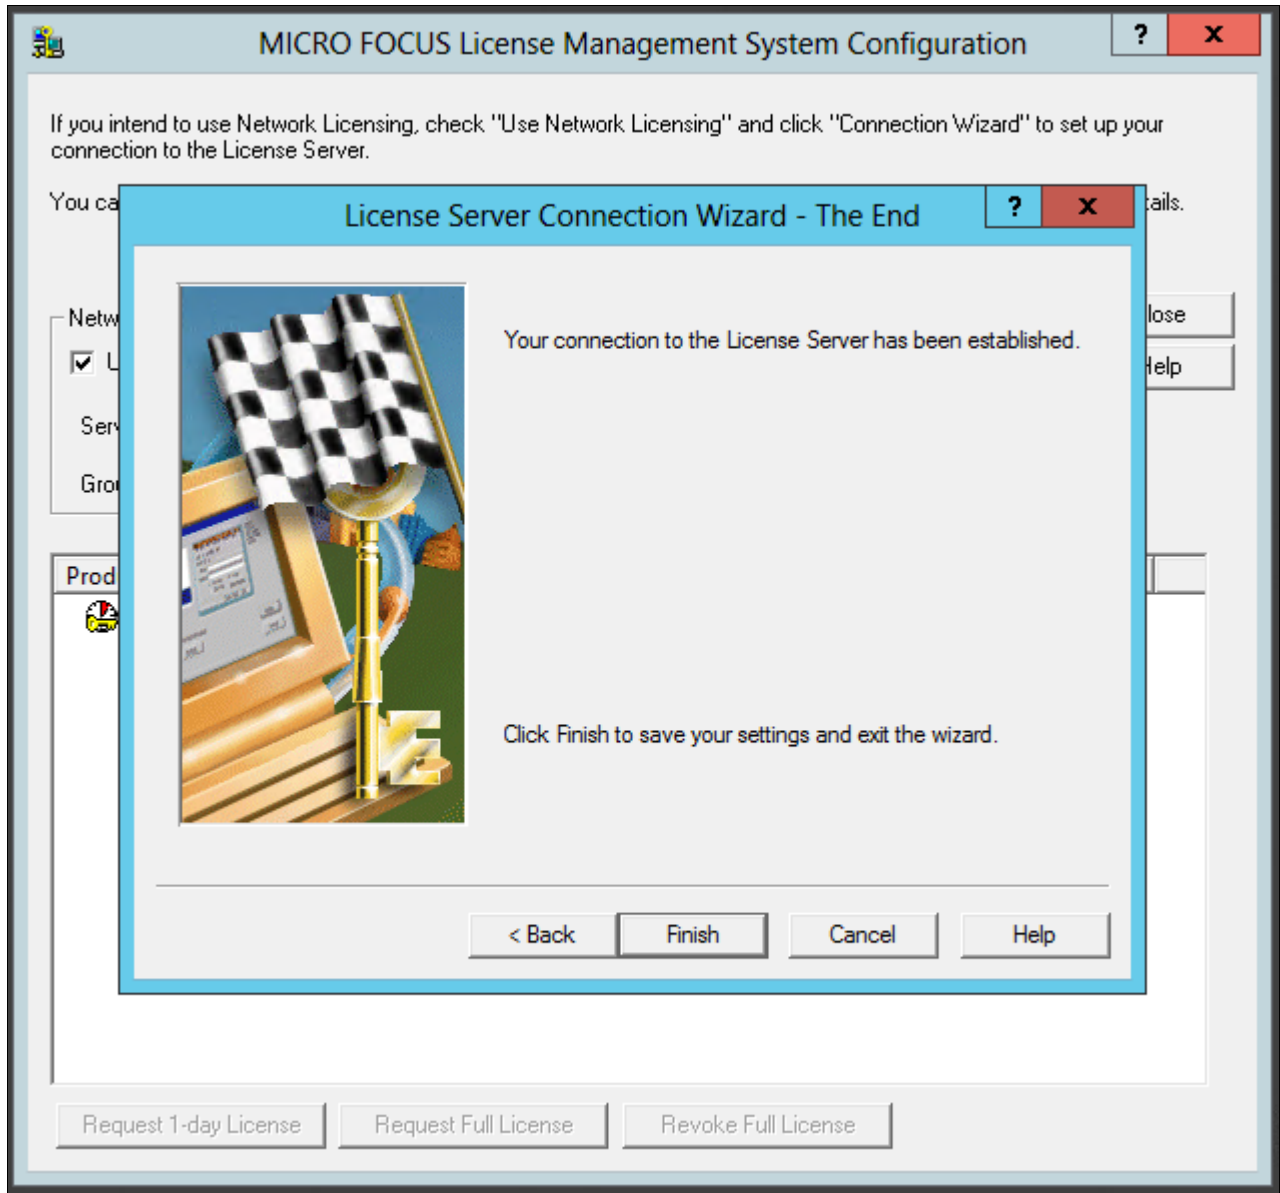

License Server Connection Wizard - The End window


8. In the details list on the MICRO FOCUS License Management System Configuration dialog box, select the check box for Net Express, and then click Request Full License, as shown in this example:

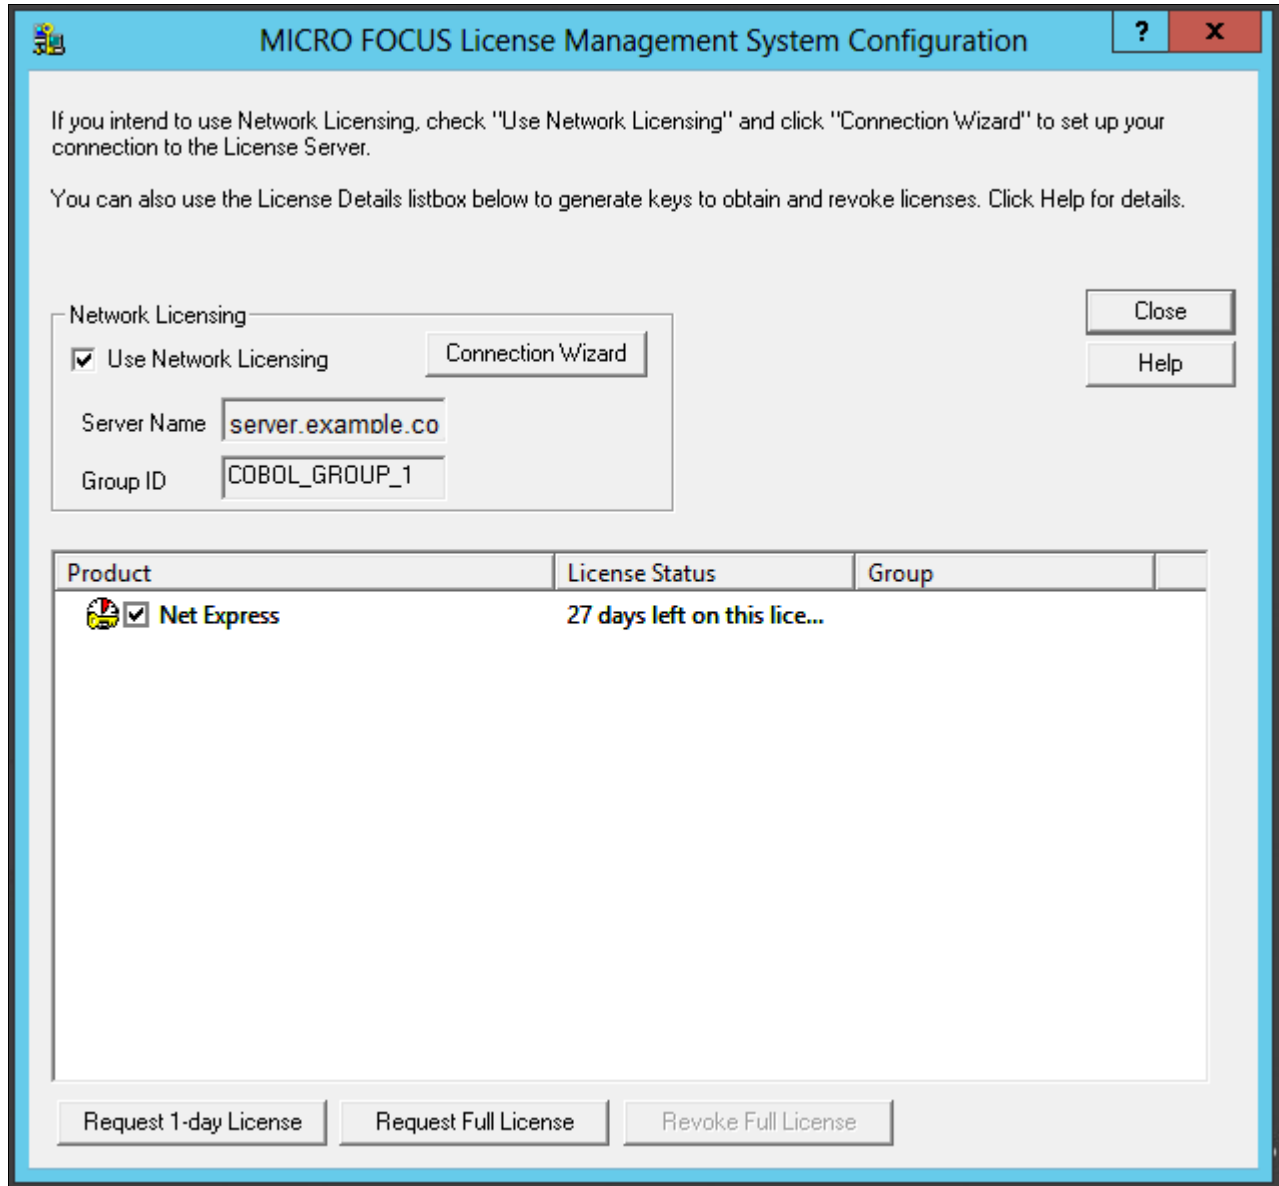

MICRO FOCUS License Management System Configuration window


- 9. Click Yes to confirm that you want to request a full license, as shown in this example.

The warning message says that requesting a full license permanently removes a license from the license server.

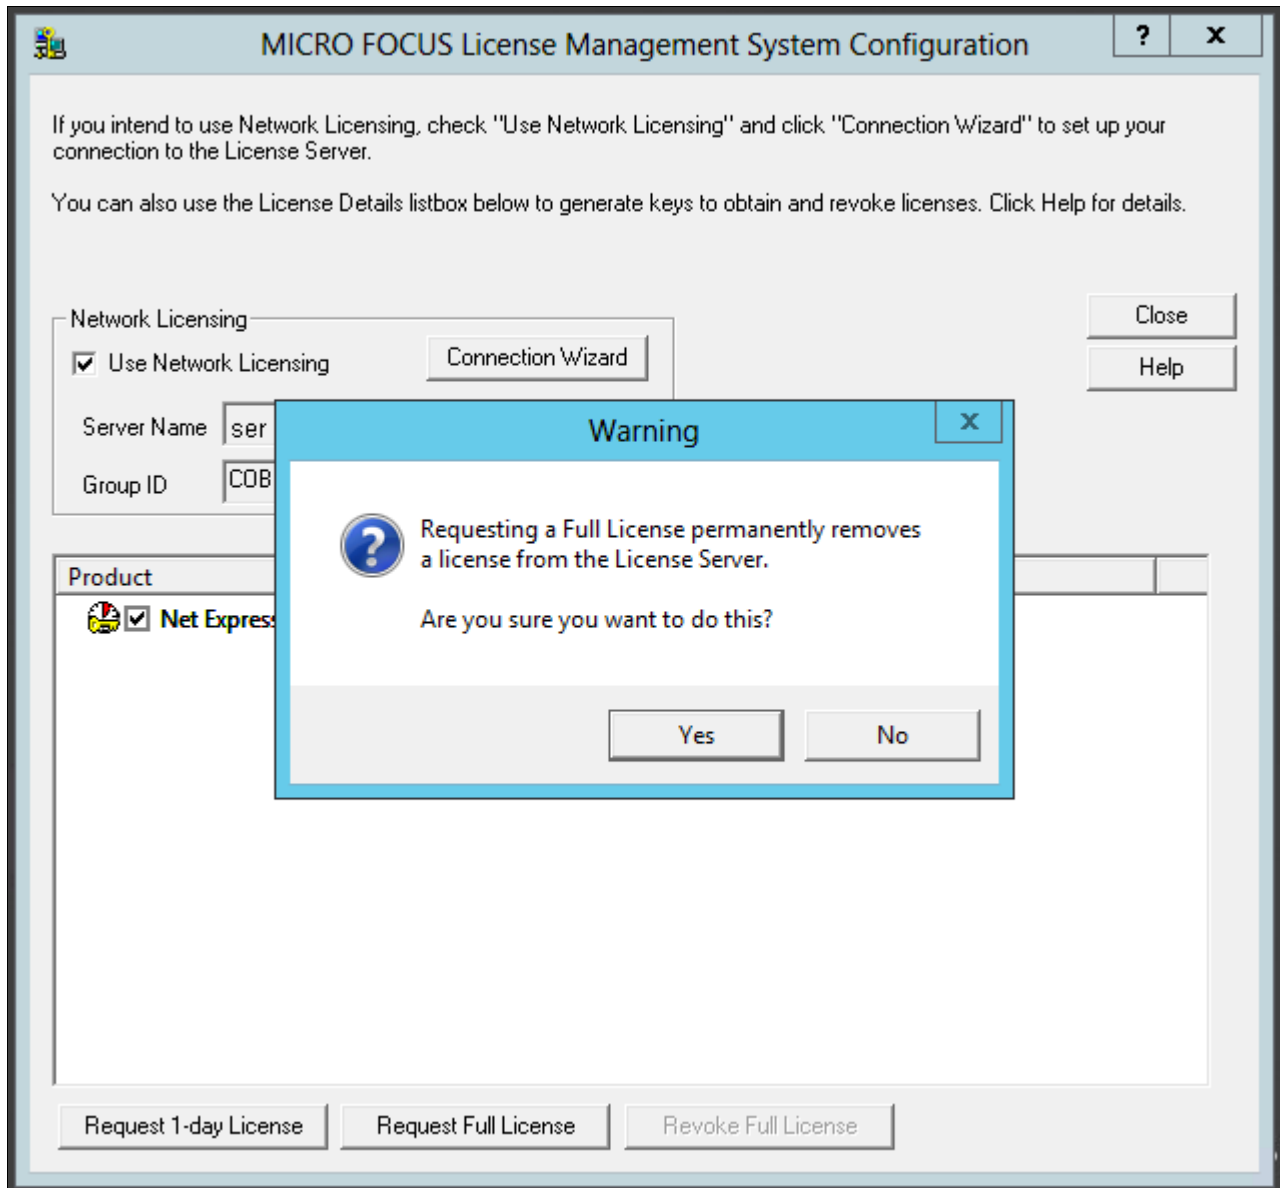


Warning message box when requesting a Full License

10. Click OK on the License Information dialog box.

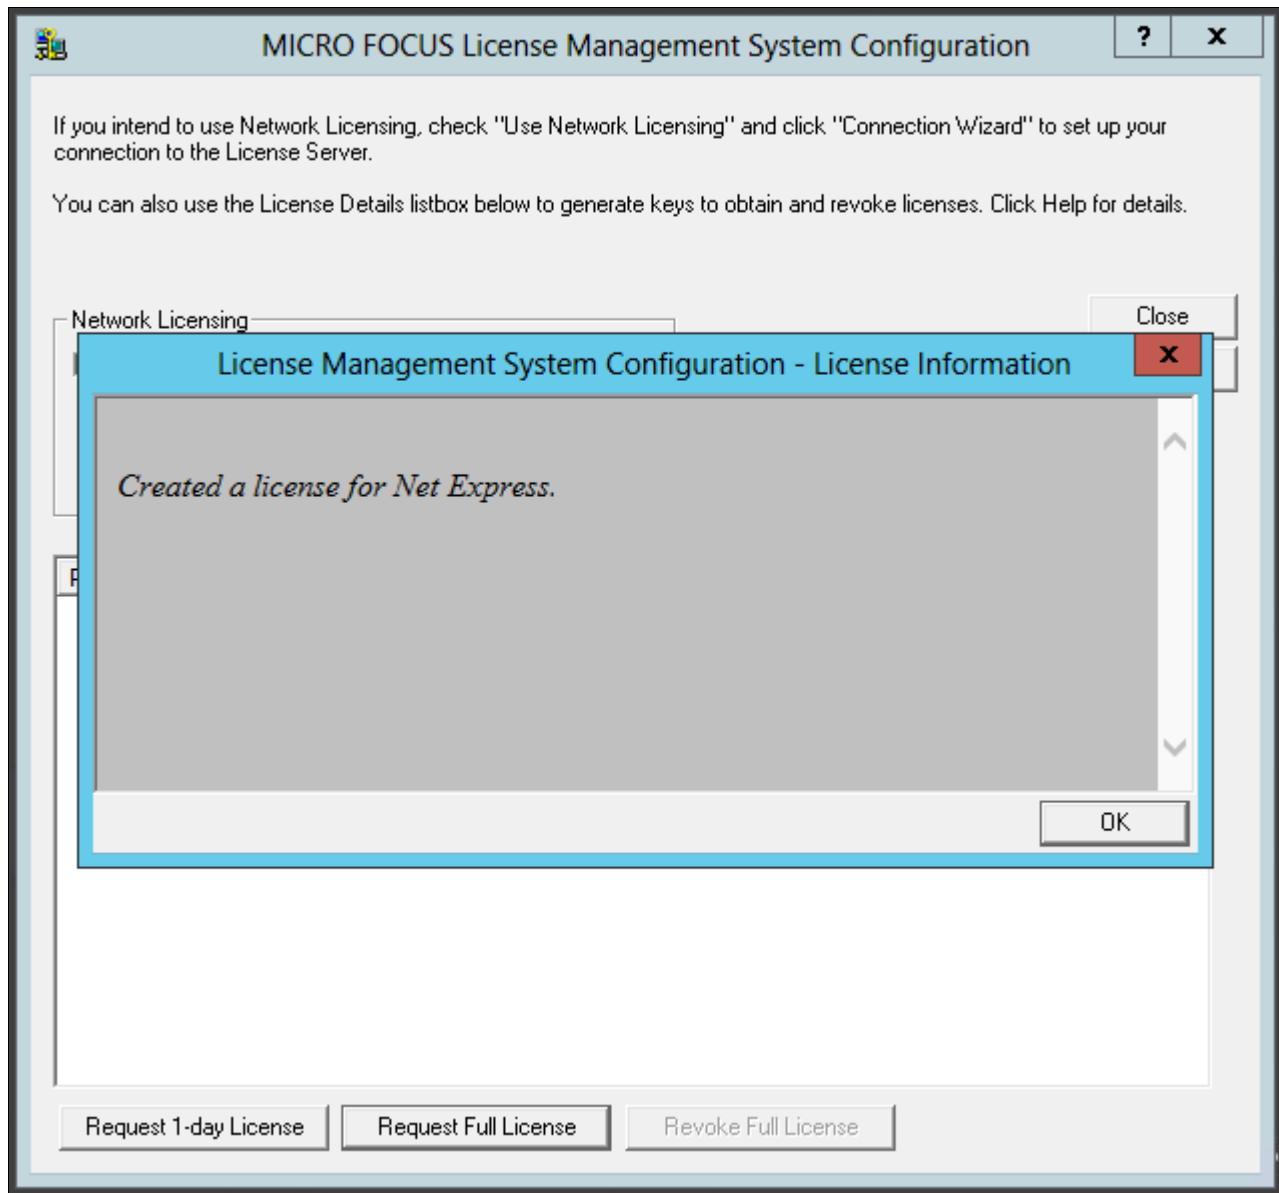

License Management System Configuration - License Information window

11. Verify that the License Status for Net Express has changed to Full License, as shown in this example, and click Close.

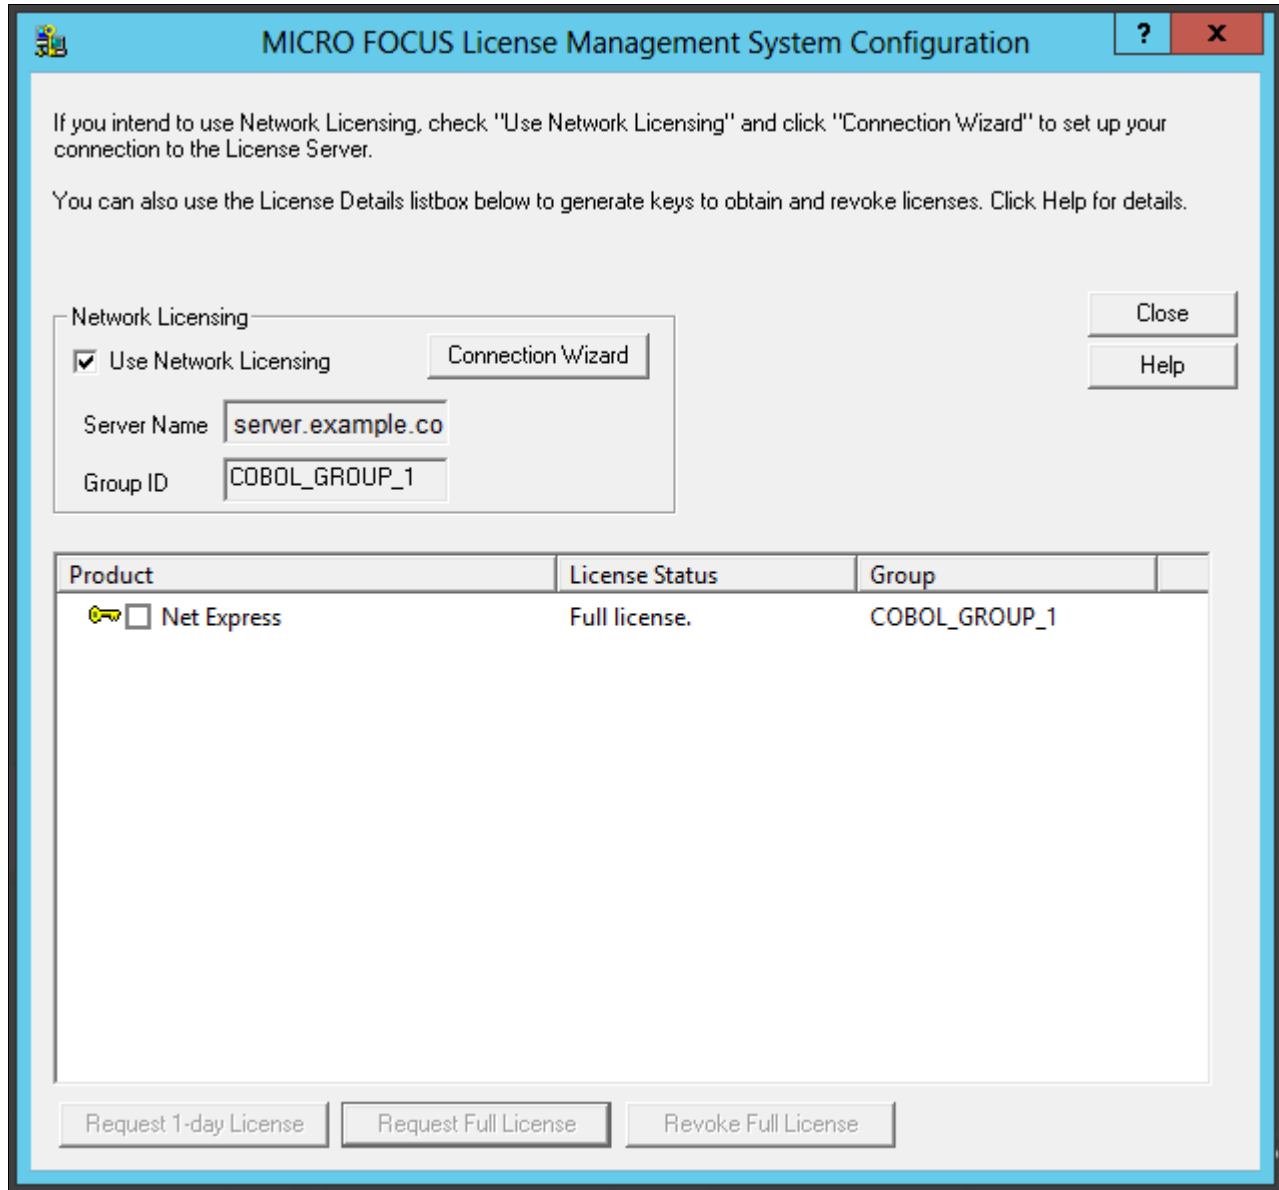

MICRO FOCUS License Management System Configuration window with Full License status

### Task 11A-3-2: Configuring a Timed License with the License Server

To configure a Timed License for temporary use:


1. Select Start, All Programs, Micro Focus Net Express 5.1, Configuration, License Management System.

---

**Note.** Alternatively, run `NE_HOME\Bin\protcfg.exe`, where `NE_HOME` is the directory where you installed Micro Focus Net Express.


---

2. Select the option Use Network Licensing, and click Connection Wizard, as shown in this example:

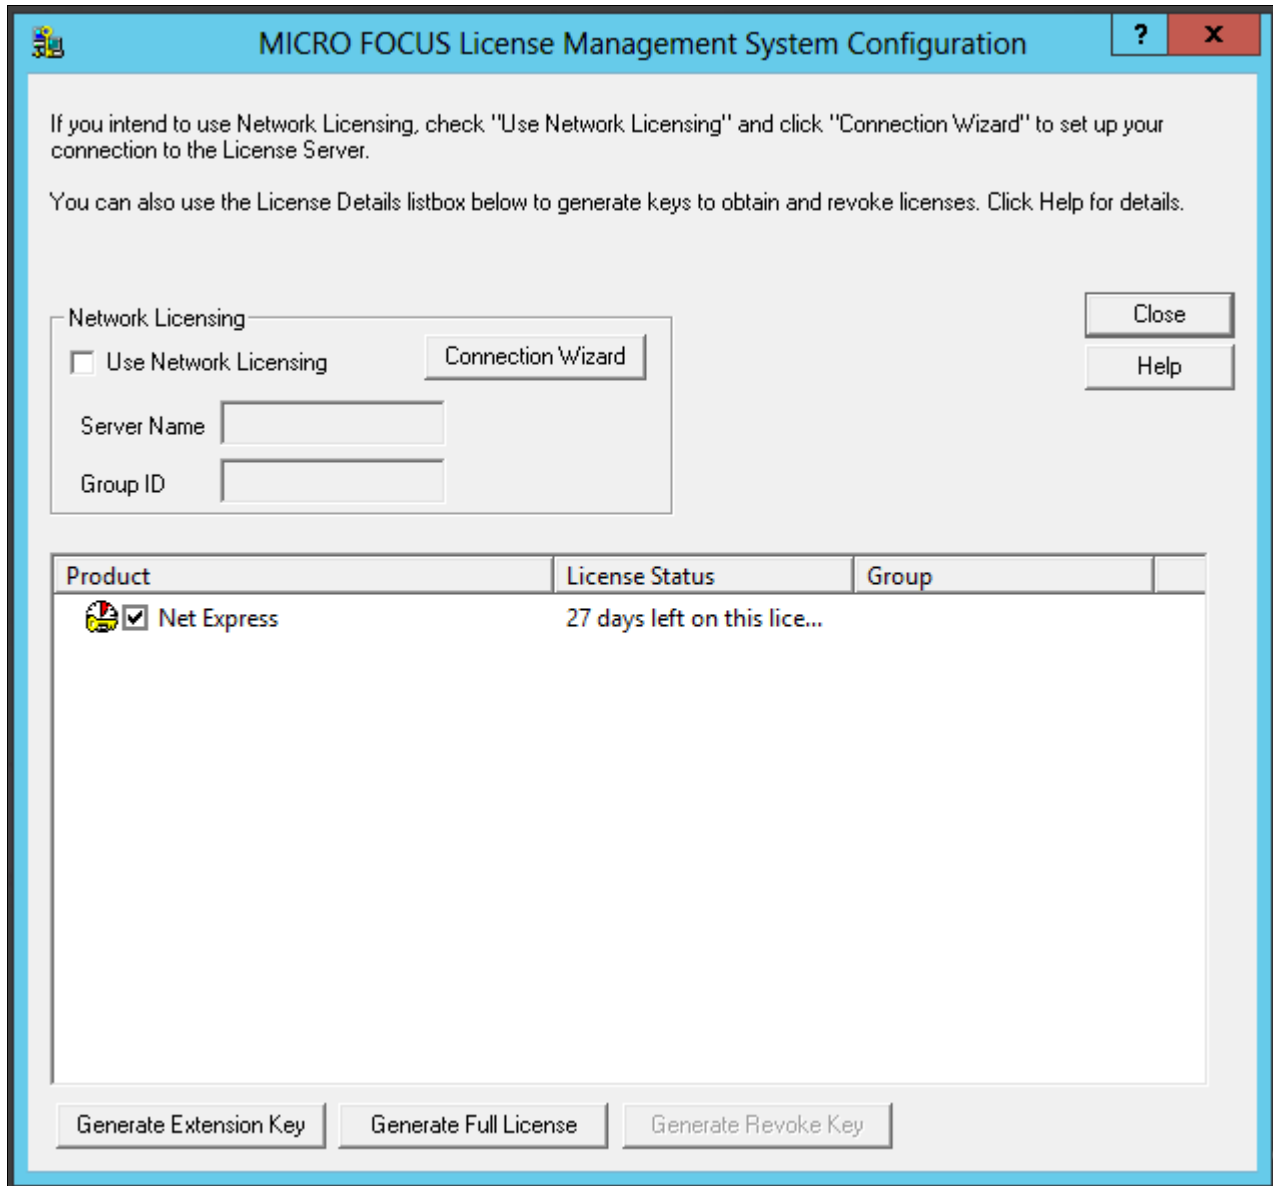


MICRO FOCUS License Management System Configuration window

3. Click Next on the License Server Connection Wizard window, shown in this example:

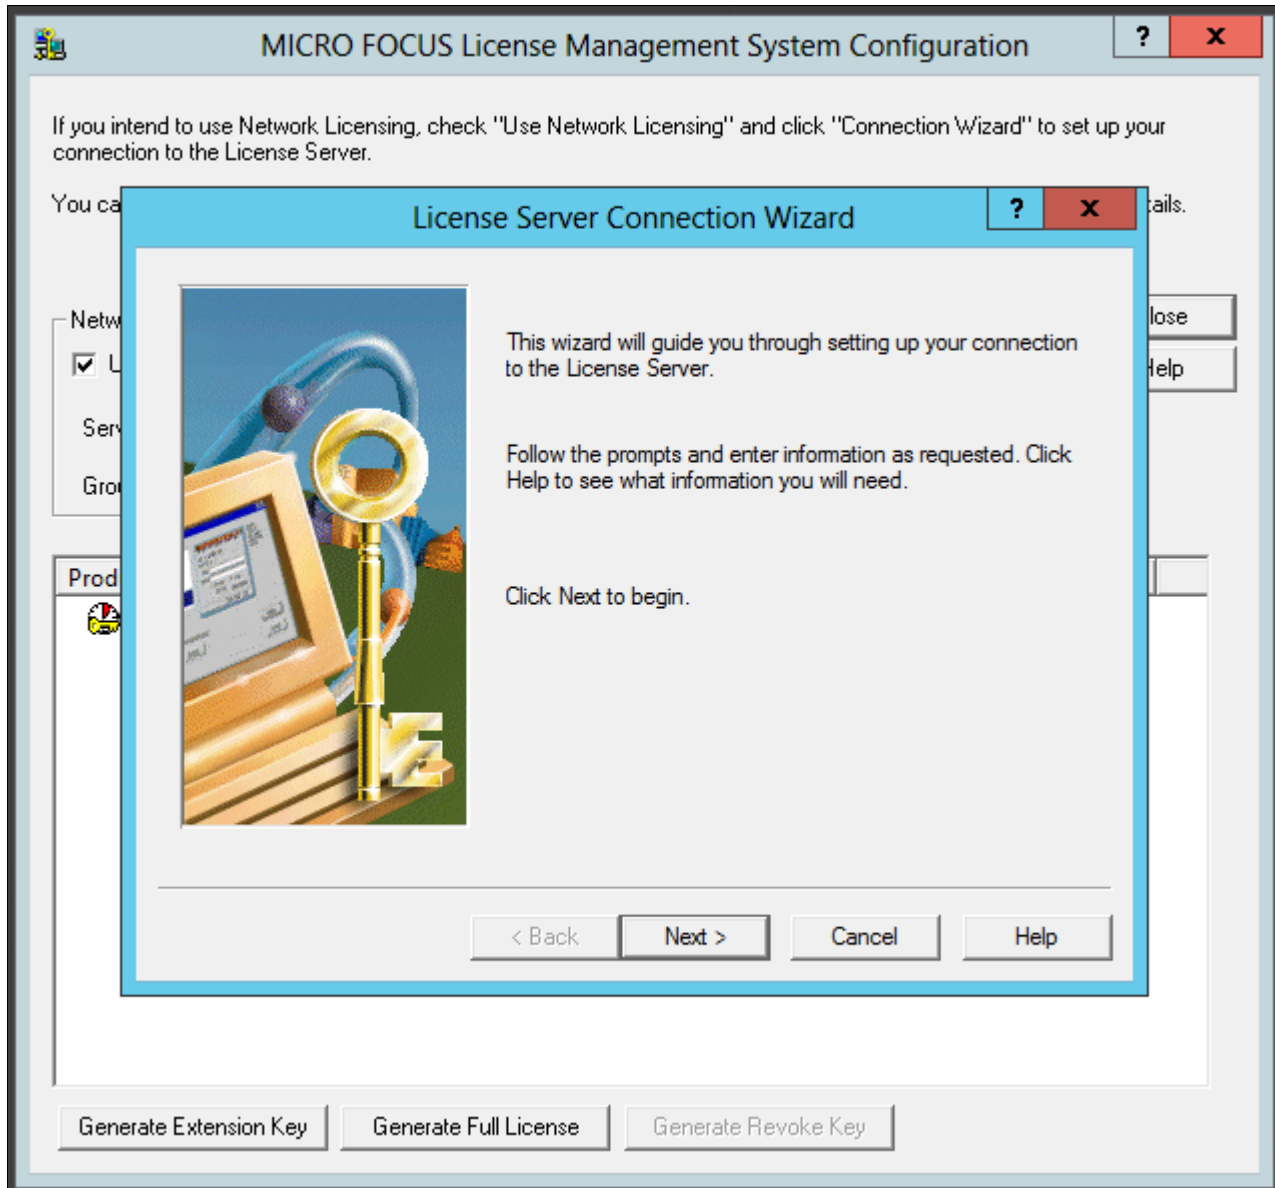

License Server Connection Wizard window

4. Enter information for the server location, and then click Next.

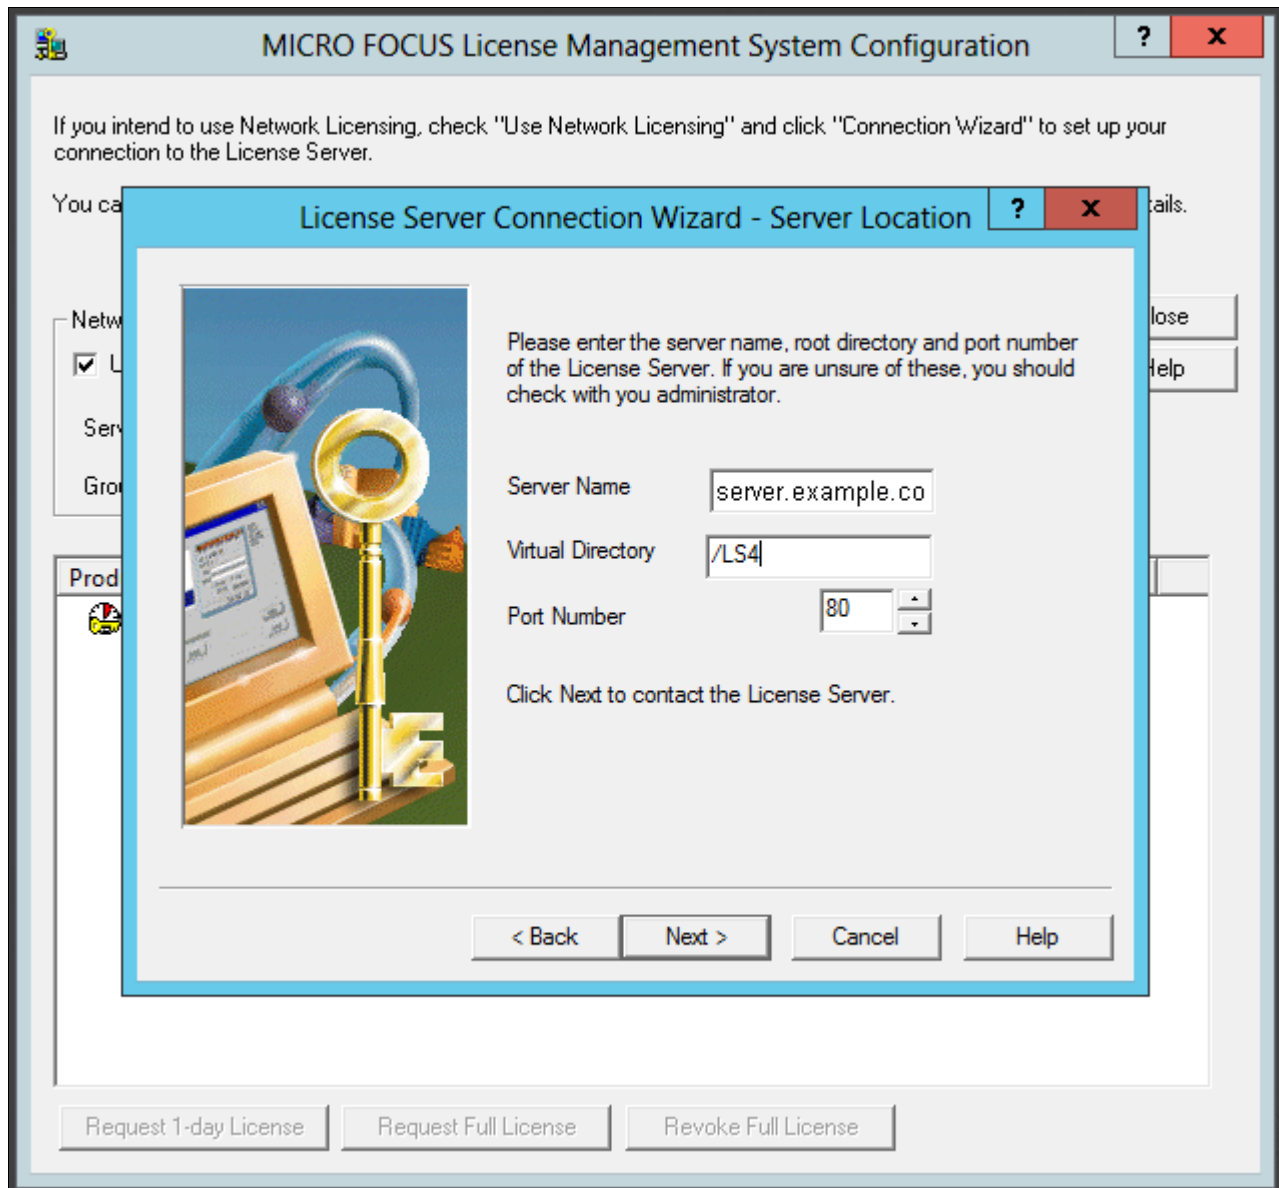


License Server Connection Wizard - Server Location

- Server Name—Enter the name of the license server; for example, server.example.com.
  - Virtual Directory; for example, /LS4.
  - Port Number—The default is 80, as shown in the example.  
Select a port that is not in use by another application.
5. You see a message saying the wizard found the server.  
Click Next.



6. Enter your group ID, which is `COBOL_TEMP_1` in this example, and specify the number of days before you have to renew the license, which is 1 (one) day in this example.

Click Next.

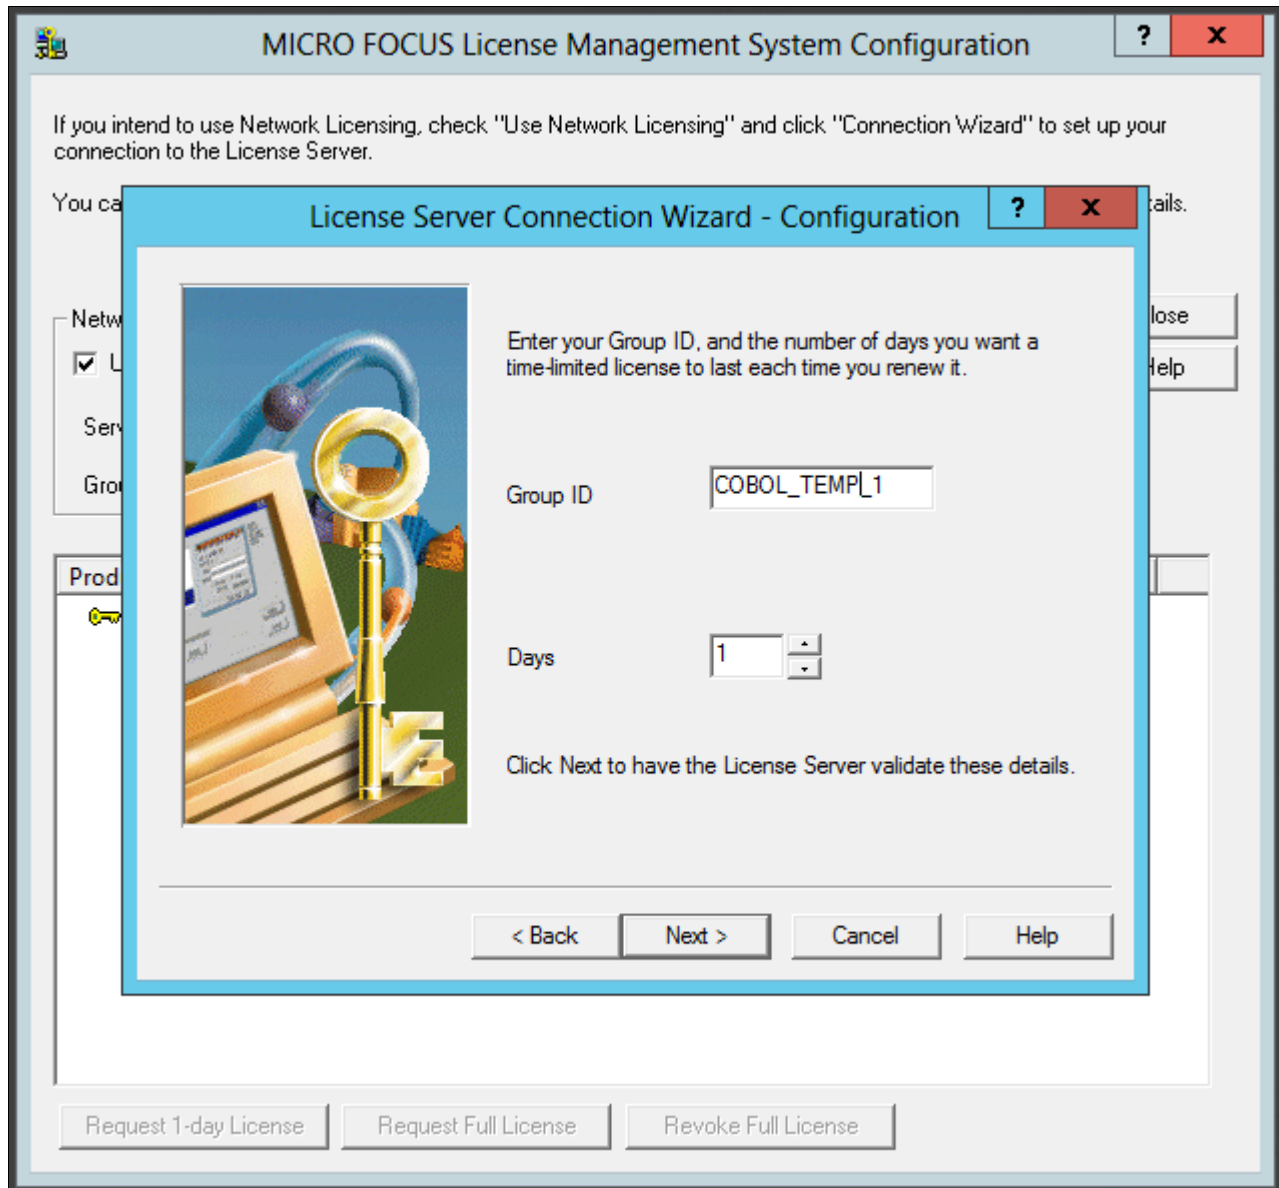


License Server Connection Wizard - Configuration window

7. Click Finish to exit the wizard.
8. In the details list on the MICRO FOCUS License Management System Configuration dialog box, select the check box for Net Express, and then click Request 1-day License.


9. Click Yes to confirm that you want to request a timed (temporary) license, as shown in this example.

The warning message says that the license will run out in one day. When you run the product after the license has expired, the License Server will be contacted automatically to renew the license for one day.

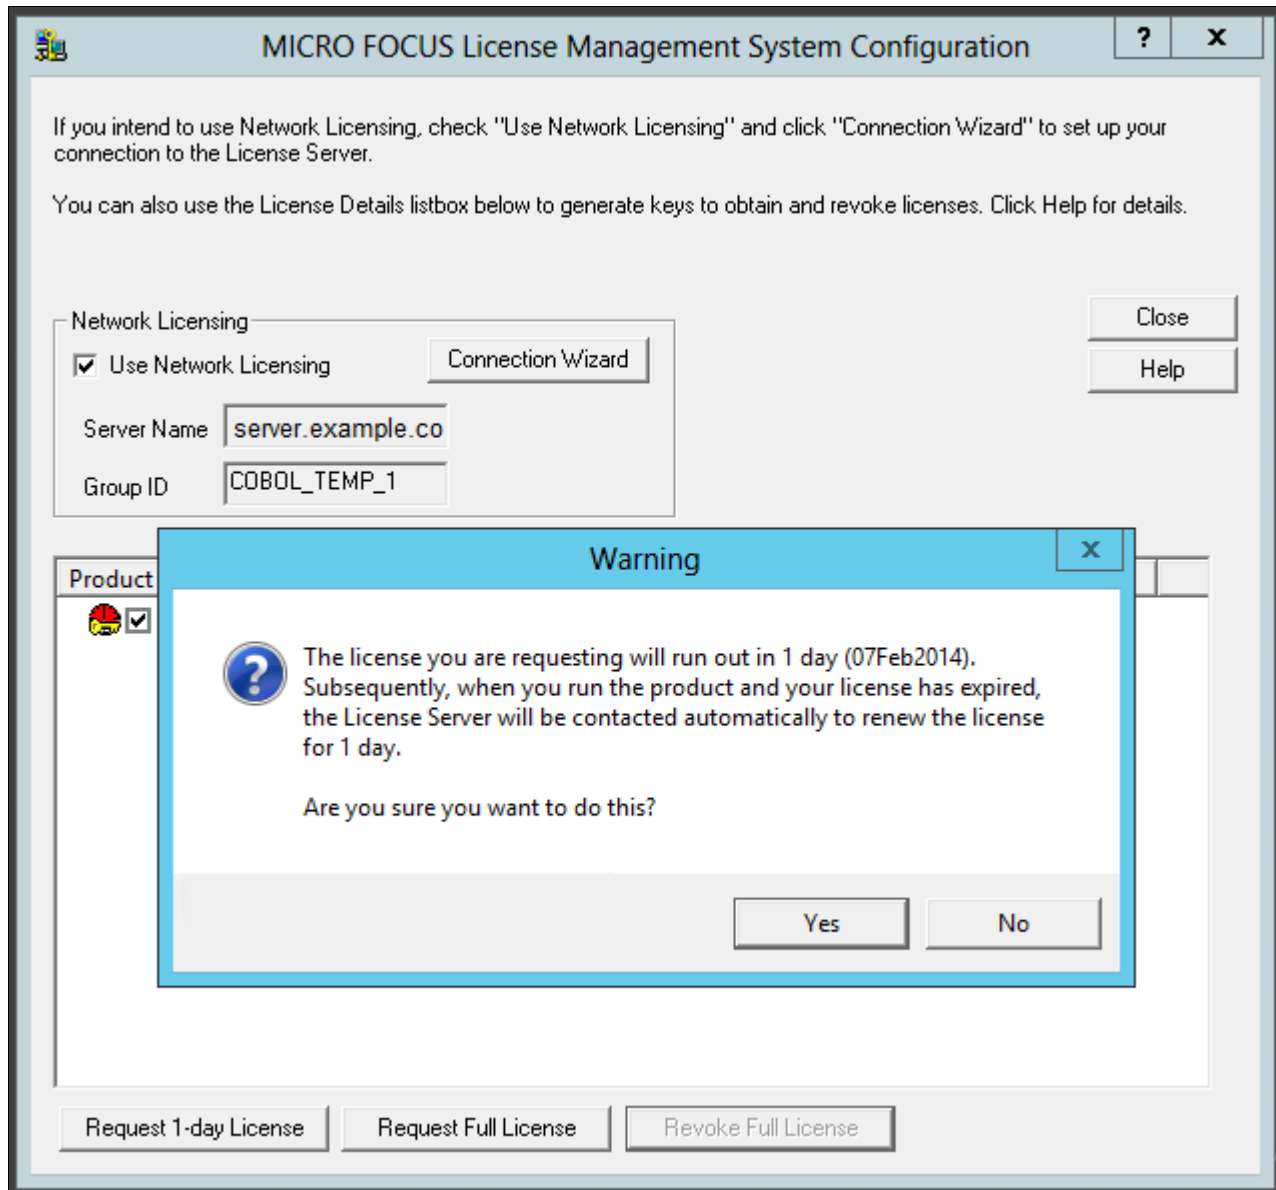


Warning message box when requesting a timed license

10. Click OK on the License Information message box.

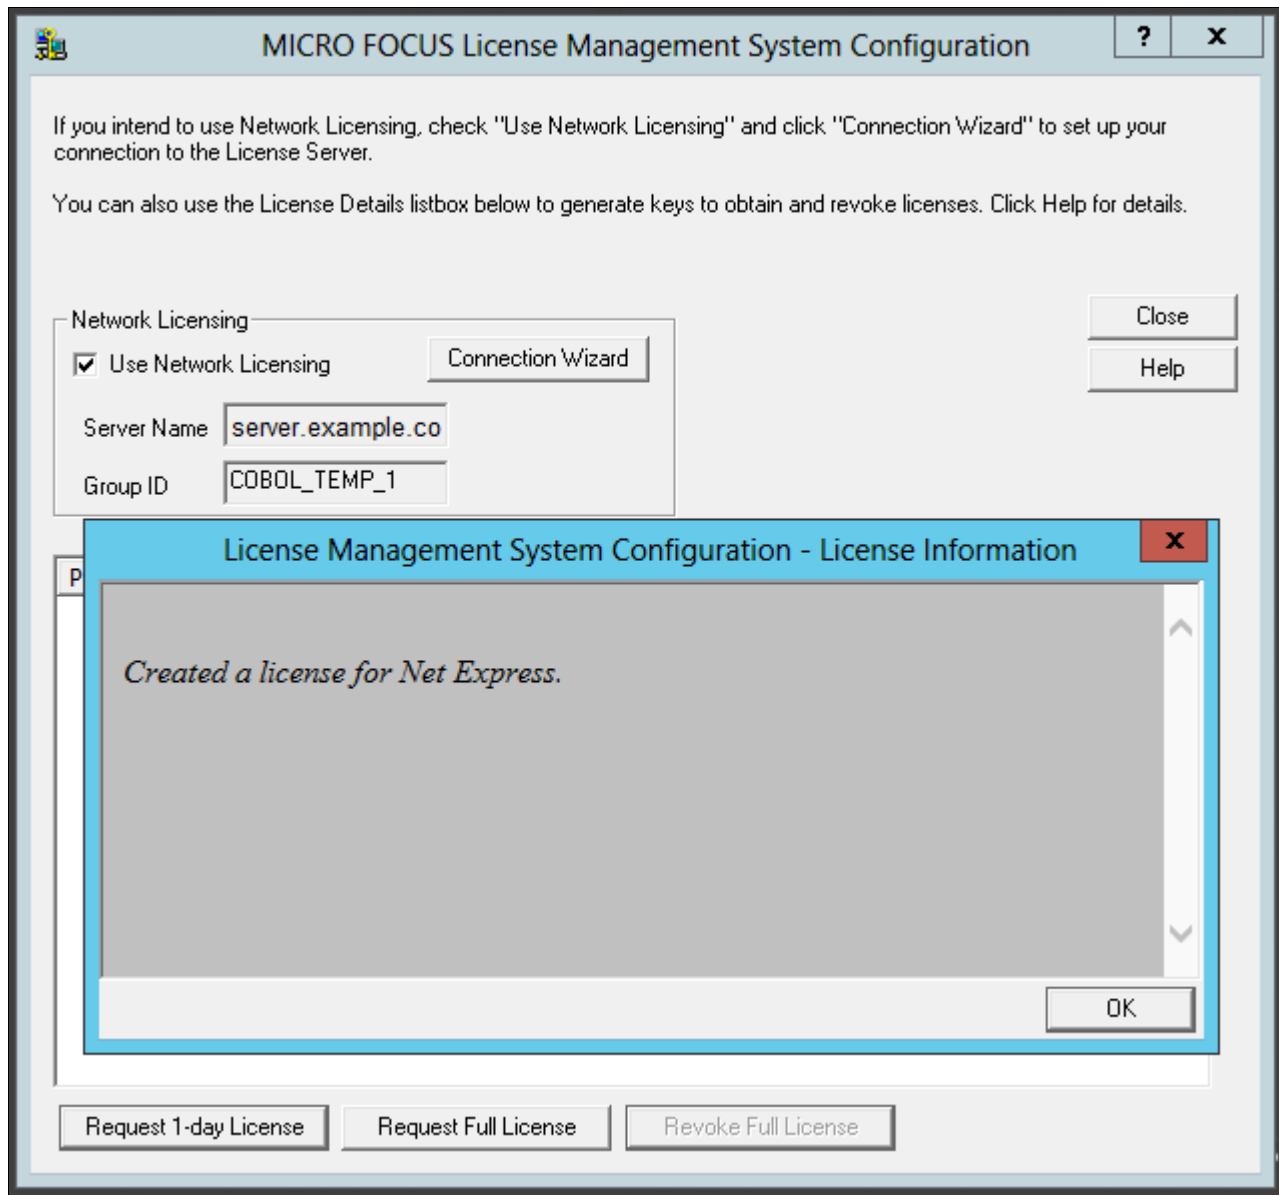

License Management System Configuration - License Information window

11. Verify that the license status has changed to "1 day left on this license," as shown in this example, and click Close.

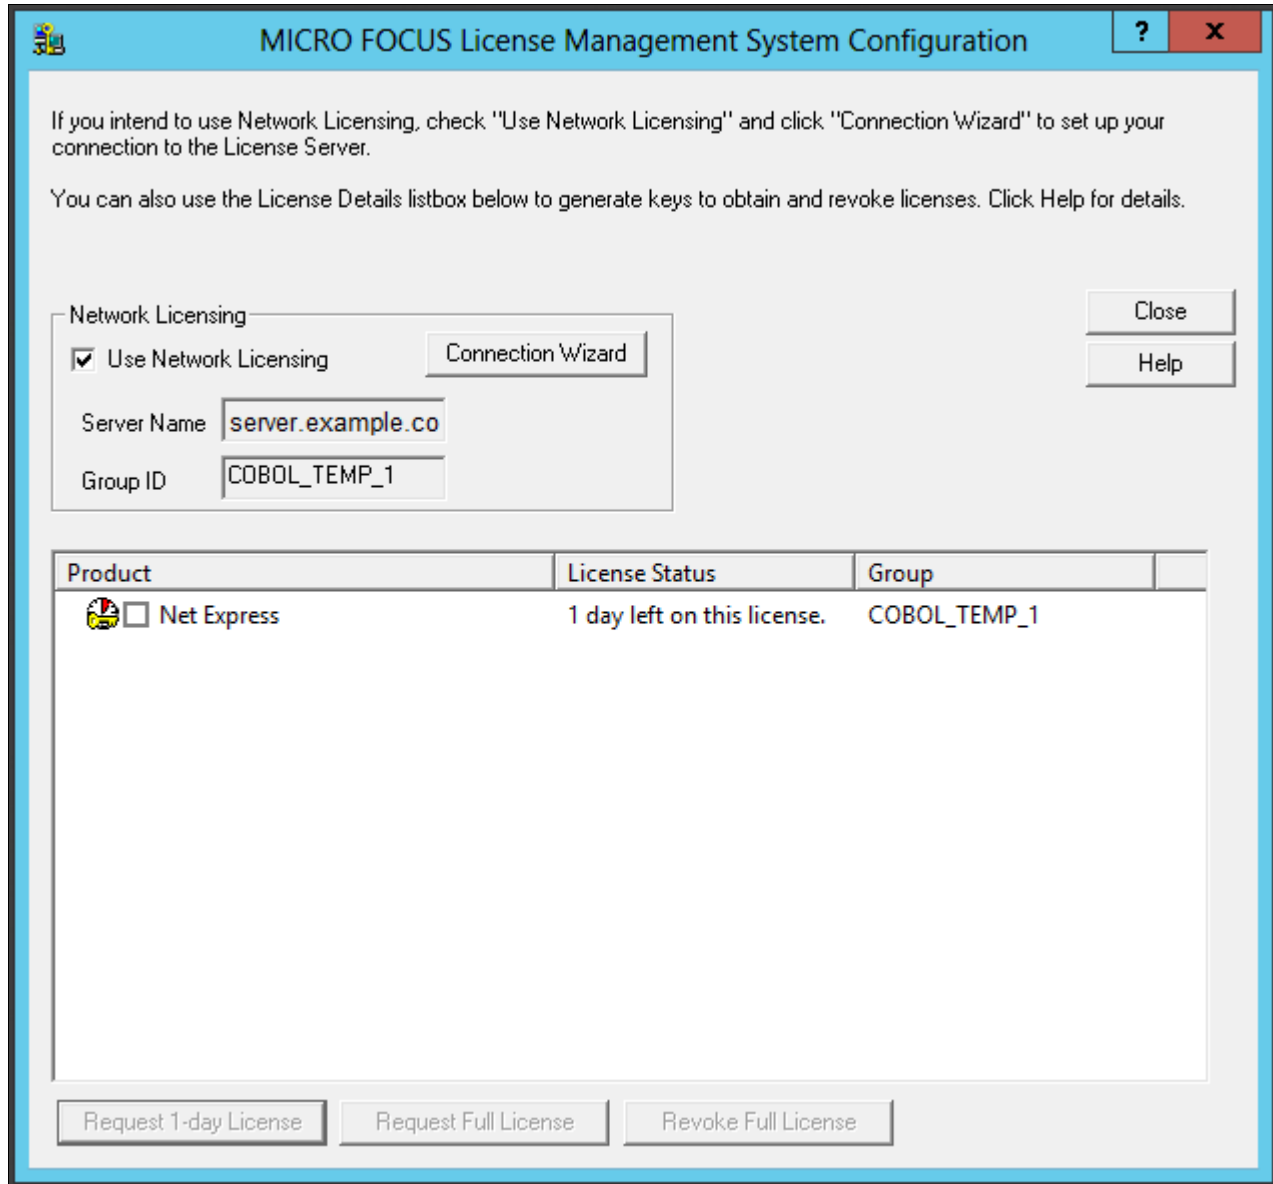

MICRO FOCUS License Management System Configuration window showing Timed License

### Task 11A-3-3: Revoking the License Using the License Management System


Revoking (deallocating) the compiler license returns it to the license pool, and makes it available for re-use, either by you or another user. This section describes how to use the Micro Focus License Management System to revoke a compiler license. For information on revoking the license by completely removing the Micro Focus Net Express installation, see the following section.

See Revoking the License by Removing the Installation.

To revoke a Full License using the Micro Focus License Management System:

1. Select Start, All Programs, Micro Focus Net Express 5.1, Configuration, License Management System.
2. Select the check box for Net Express under Product in the details list, and click Revoke Full License.
3. Click Yes on the warning message box to confirm that you want to revoke a full license, as shown in this example.


The warning message says that revoking a full license means that you will no longer have a valid license.

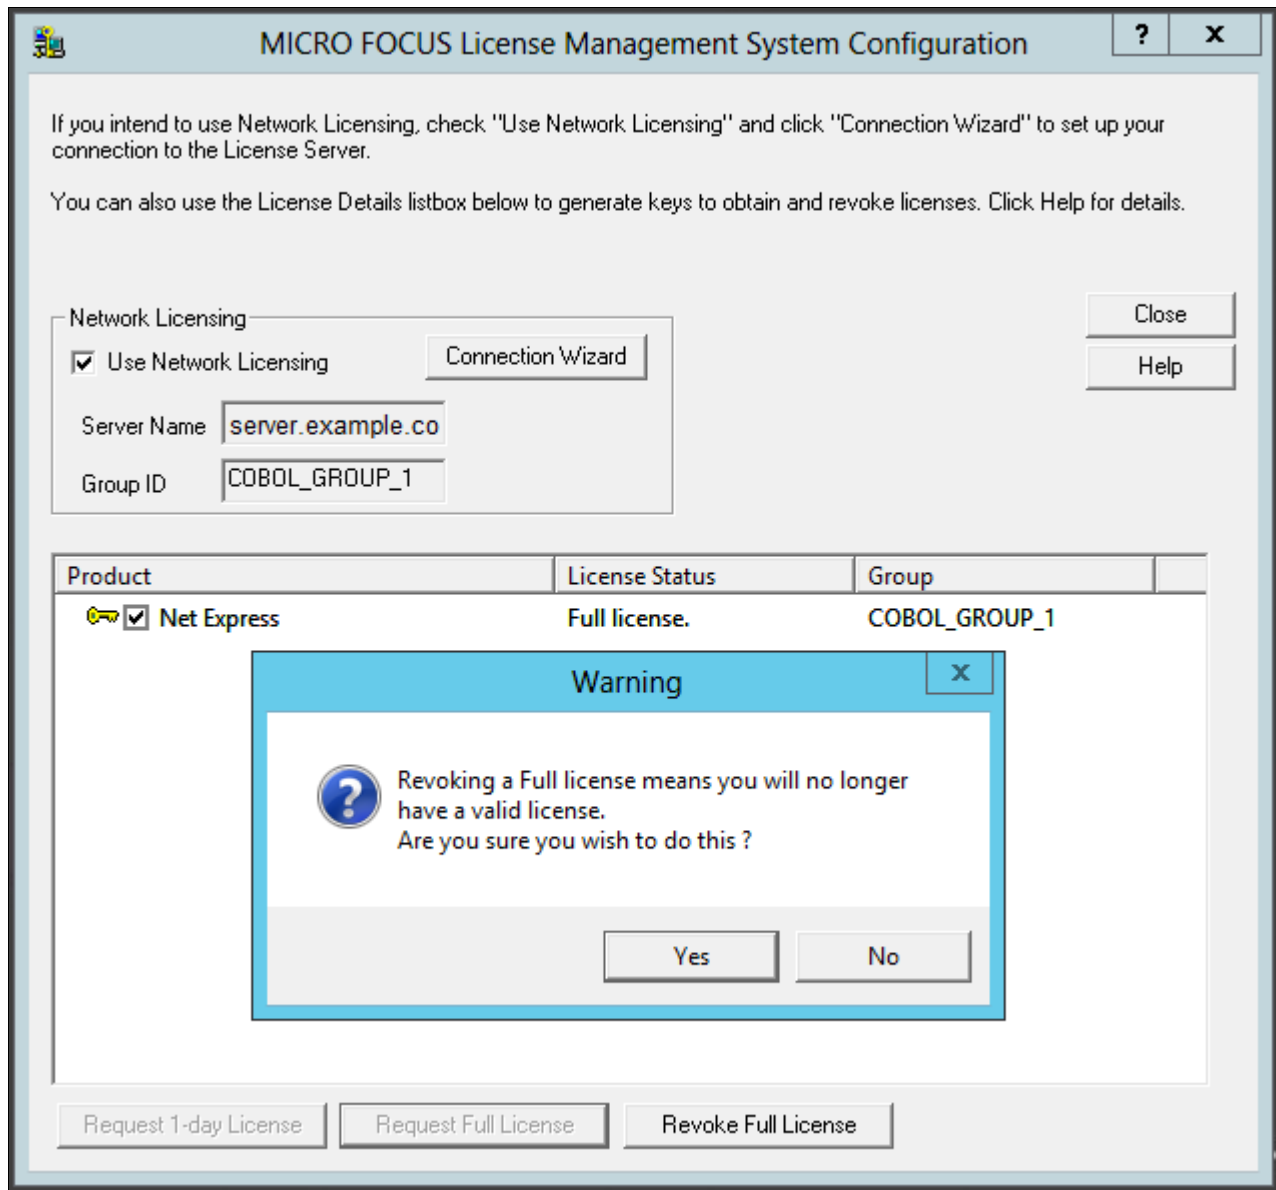

Warning message box on Revoking a Full License

## 4. Click OK.

The License Information message box says that the Net Express license has been revoked.

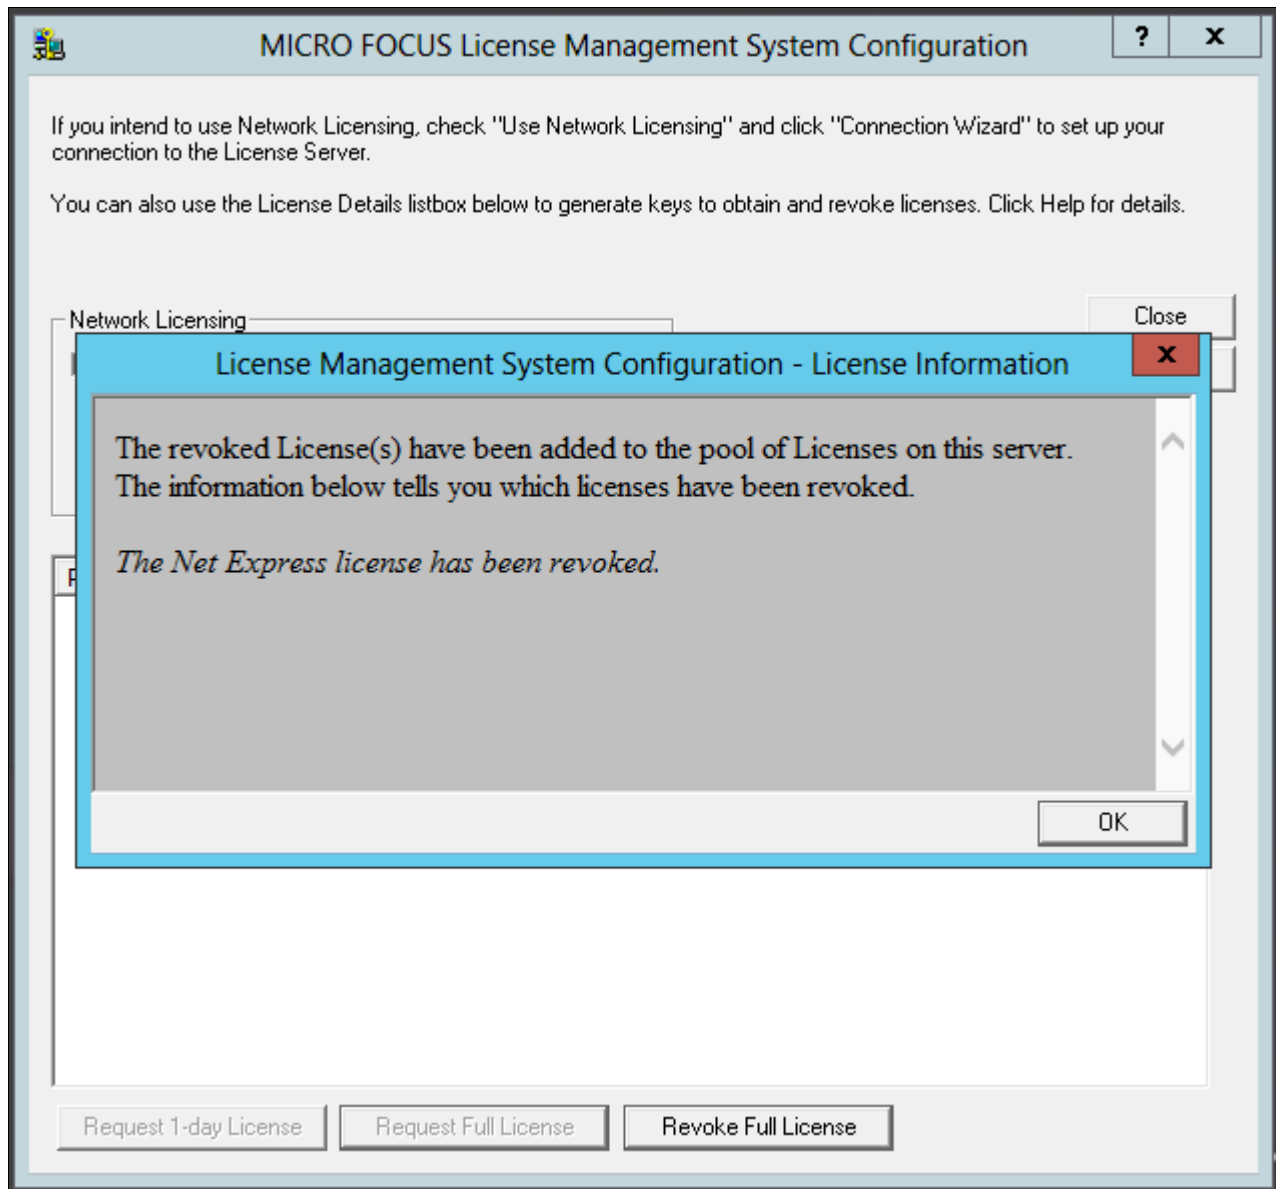

License Management System Configuration - License Information

## 5. Verify that the license status has changed to "license has expired" and click Close.


### Task 11A-3-4: Revoking the License by Removing the Installation

Revoking (deallocating) the compiler license returns it to the license pool, and makes it available for re-use, either by you or another user. This section describes how to revoke the license by completely removing the Micro Focus Net Express 5.1 installation. For information on using the Micro Focus License Management System to revoke a compiler license, see the previous section.

See Revoking the License Using the License Management System.


To remove the installation and revoke the license:

1. Select Start, All Programs, All Control Panel Items, Programs and Features.
2. Highlight Micro Focus Net Express 5.1 in the list of programs.
3. Right-click and select Uninstall, as shown in this example:

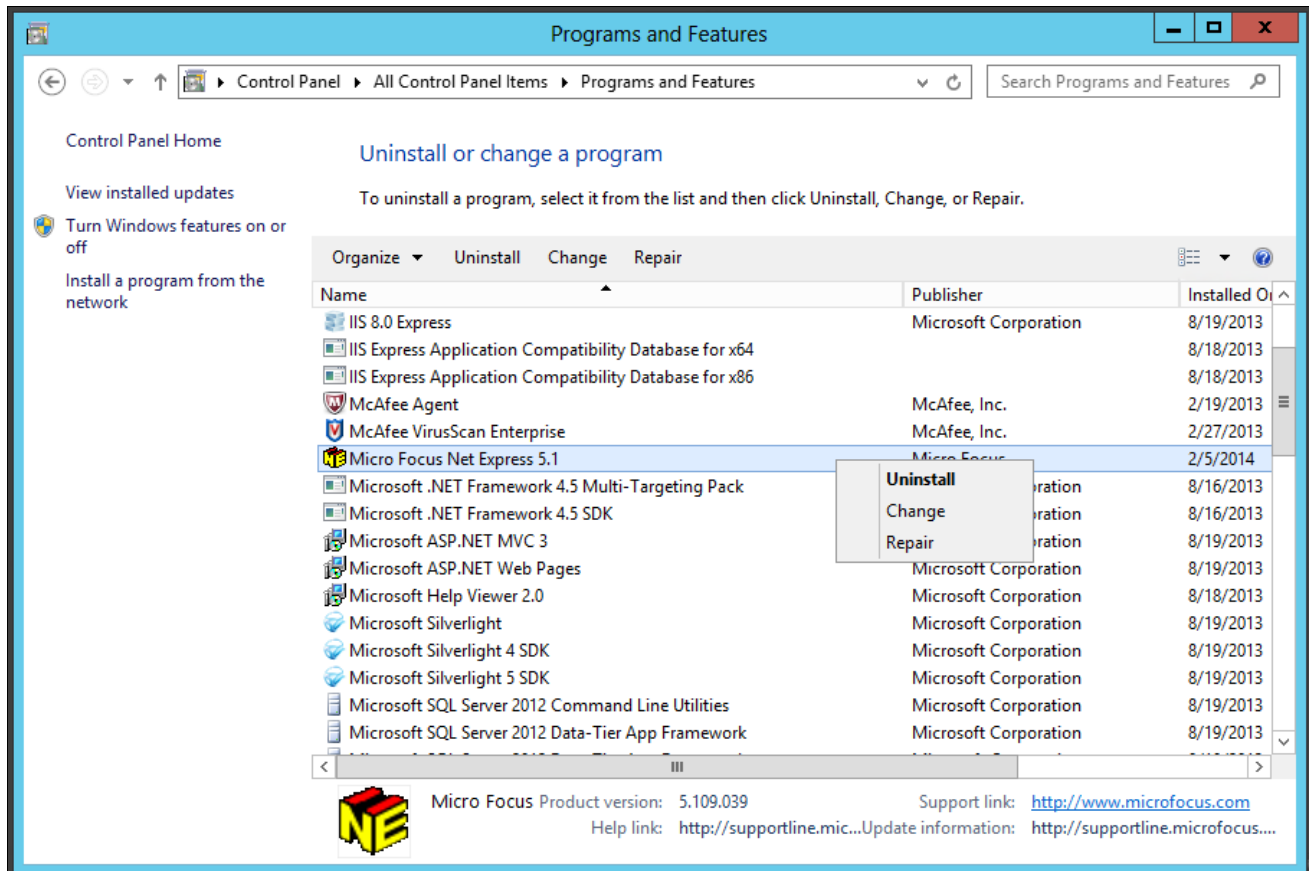

Microsoft Windows Control Panel Programs and Features

- Click Revoke on the Uninstalling Product Warning message box, as shown in this example:

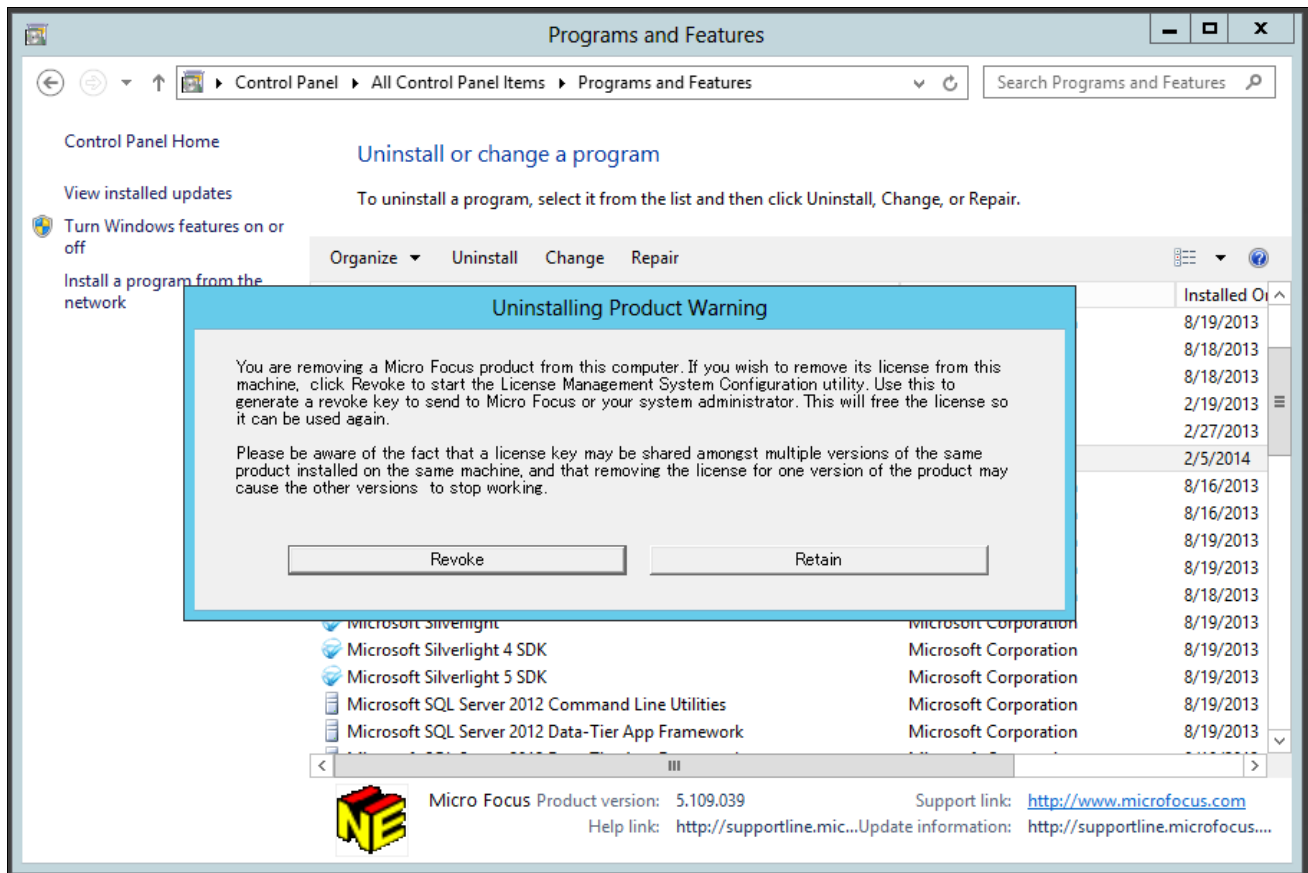

Uninstalling Product Warning message box

The MICRO FOCUS License Management System Configuration window appears.

- Follow the instructions in the previous section to revoke the license.  
See [Revoking the License Using the License Management System](#).
- When the process to revoke the license is complete, close the MICRO FOCUS License Management System Configuration window, and complete the process to remove Micro Focus Net Express 5.1.

## Task 11A-4: Using the Micro Focus COBOL Compiler on Microsoft Windows

This section discusses:

- Understanding COBOL Compilation
- Compiling COBOL on Microsoft Windows with a PS\_HOME Setup
- Compiling COBOL on Microsoft Windows with a PS\_APP\_HOME Setup
- Compiling COBOL on Microsoft Windows with a PS\_CUST\_HOME Setup
- Recompiling COBOL on Microsoft Windows
- Setting Up the Micro Focus Net Express Runtime



- Defining the GNT and INT Files
- Distributing COBOL Binaries

## Understanding COBOL Compilation

With PeopleSoft PeopleTools 8.50 and higher, your COBOL always needs to be compiled on Microsoft Windows. (This is a change from previous versions of PeopleSoft PeopleTools, which delivered compiled COBOL for Microsoft Windows.) This section assumes that you are carrying out the compile process from your file server. (The COBOL compiler itself does not need to be on the file server, as long as the user can write to the file server and can link to the src and bin directories.) The recommended approach for the PeopleSoft installation is to use CBLBLD.BAT to compile all your COBOL source files at once. Another alternative is CBLMAKE.BAT, which you can use to compile selected COBOL files.

The way that you set up your installation environment determines how you compile COBOL. This section includes different procedures for the different installation environments, as follows:

- *PS\_HOME Setup*

If you installed the PeopleSoft Application software to a *PS\_APP\_HOME* location that is the same as the *PS\_HOME* location where you installed the PeopleSoft PeopleTools software, follow the instructions in these sections:

- Compiling COBOL on Microsoft Windows with a *PS\_HOME* Setup
- Defining the GNT and INT Files

- *PS\_APP\_HOME Setup*

As described earlier, for PeopleSoft PeopleTools 8.52 and later, you have the option to install the PeopleSoft Application software to a location outside *PS\_HOME*. If the *PS\_APP\_HOME* environment variable is defined and is different from *PS\_HOME*, the COBOL build scripts behave differently under certain build options. There are also some new build options under certain environments which would be recognized if *PS\_APP\_HOME* is defined.

If you installed the PeopleSoft Application software to a *PS\_APP\_HOME* location that is different from the *PS\_HOME* location where you installed the PeopleSoft PeopleTools software, follow the instructions in these sections:

- Compiling COBOL on Microsoft Windows with a *PS\_APP\_HOME* Setup
- Defining the GNT and INT Files

- *PS\_CUST\_HOME Setup*

For PeopleSoft PeopleTools 8.53 and later, you have the option to place customized COBOL baseline sources into a location referenced by the environment variable *PS\_CUST\_HOME*.

The *PS\_CUST\_HOME* directory structure must replicate that of *PS\_HOME* or *PS\_APP\_HOME*; that is, any COBOL source file that is customized should be placed in the same relative path as was present in the original location.

If your environment includes customized files in a *PS\_CUST\_HOME* directory, follow the instructions in these sections:

- Compiling COBOL on Microsoft Windows with a *PS\_CUST\_HOME* Setup
- Defining the GNT and INT Files

For those systems on which you only need to run COBOL, but do not need to compile it, you must install and license the Micro Focus Net Express Runtime.

See Setting Up the Micro Focus Net Express Runtime.

Make certain to check whether you need to apply any late-breaking patches.

See My Oracle Support, Patches & Updates.

## See Also

"Preparing for Installation," Defining Installation Locations.

## Task 11A-4-1: Compiling COBOL on Microsoft Windows with a PS\_HOME Setup

This section discusses:

- Prerequisites
- Compiling with CBLBLD.BAT with a PS\_HOME Setup
- Compiling with CBLMAKE.BAT with a PS\_HOME Setup

### Prerequisites

This section assumes that you installed both PeopleSoft PeopleTools and PeopleSoft Application software to *PS\_HOME*, and that you have not set *PS\_CUST\_HOME*.

### Compiling with CBLBLD.BAT with a PS\_HOME Setup

To compile COBOL with CBLBLD.BAT:

1. Set up two environment variables, %PS\_HOME% and %COBROOT%, on the machine from which you'll compile COBOL. (This should be either your file server or a machine that has access to your file server.)

You can do this from a command prompt window. This table gives the environment variables and their purposes.

| Environment Variable | Purpose                                                                                                                                      |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| PS_HOME              | PeopleSoft home directory—that is, the drive letter and high-level PeopleSoft directory where you installed PeopleTools and the application. |
| COBROOT              | Drive letter and root directory of the COBOL compiler.                                                                                       |

For example, you could enter the following in the DOS command prompt:

```
set PS_HOME=C:\HR92
set COBROOT="C:\Program Files\Micro Focus\Net Express 5.1\base"
```

2. Open a command prompt window if you do not have one open already, and change directories to *PS\_HOME*\setup.
3. Execute CBLBLD.BAT as follows:

```
cblbld <compile drive> <compile directory>
```

In this command, *<compile drive>* is the drive where the compile takes place, and *<compile directory>* is the temp directory where the compile takes place.

The CBLBLD.BAT file will create the compile directory for you if it does not already exist.

---

**Note.** *Make sure* to include a space between the `<compile drive>` and `<compile directory>` parameters; they are treated as two different parameters within the CBLBLD.BAT batch program. Also ensure that you have write permission to `<compile drive>` and `<compile directory>` as the compile process will take place there.

---

For example, the following command will take the COBOL source from `PS_HOME\src\cbl` and do the compile process under `c:\temp\compile`:

```
cblbld c: \temp\compile
```

Make note of the information that is displayed on the screen while the process is running; it provides the locations of important files that you will need to examine.

4. After you have successfully compiled your source code, all of the executables should have been placed in your `<PS_HOME>\CBLBIN<X>` directory (this directory will be named CBLBINA or CBLBINU, depending on whether you are using ANSI or Unicode). Make sure that all of the files were copied correctly to this directory.
5. If the files were copied correctly, you can delete the entire temporary compile directory to free space on your disk drive.

---

**Note.** You may want to keep the files in the compile directory for testing purposes. Make sure that you have enough space on the drive where `<compile directory>` is located. Estimate about three times the amount in the `<PS_HOME>\CBLBIN<X>` directory.

---



---

**Note.** If you chose the Unicode option while running the PeopleSoft Installer, the file UNICODE.CFG was created in the setup directory. UNICODE.CFG automatically triggers the batch file CBL2UNI.BAT when you run CBLBLD.BAT. Another batch file, CBLRTCPY.BAT, copies four DLLs (CBLINTS.DLL, CBLRTSS.DLL, CBLVIOS.DLL, COB32API.DLL) from the Microfocus compiler directory (identified by `%COBROOT%` setting) into the appropriate CBLBIN directory (CBLBINA or CBLBINU) when you run CBLBLD. These files are needed for COBOL to run; they can reside anywhere as long as they are in the path. You can run either of these BAT files independently from the command line (they reside in `PS_HOME\setup`). For CBLRTCPY.BAT you need to specify a target directory.

---

## Compiling with CBLMAKE.BAT with a PS\_HOME Setup

CBLBLD.BAT compiles all your COBOL source files at once, which can take a lot of time. CBLMAKE.BAT, in contrast, lets you employ one or more parameters to compile a specific COBOL source file or a selected group of COBOL source files. Unlike CBLBLD.BAT, however, CBLMAKE.BAT does not automatically trigger the batch file CBL2UNI.BAT or CBLRTCPY.BAT.

Here is the basic syntax for CBLMAKE.BAT:

```
CBLMAKE.BAT [] [ALL] [wildcard filename[ALL]] [wildcard filename | =>
wildcard=>
filename without extension[INT | GNT | EXE]] [LIST]
```

---

**Note.** The switches are well documented in the CBLMAKE.BAT file in the form of comments.

---

**Note.** If the change in the COBOL source is a copy member, you must compile all of the COBOL programs using CBLBLD.BAT. You know it is a copy member when the third letter in the file name is a C, as in PTC SQLRT.CBL.

---

The following table describes the various options for CBLMAKE.BAT.

| Option                    | Purpose                                                     |
|---------------------------|-------------------------------------------------------------|
| Cblmake                   | Compiles all source                                         |
| Cblmake all               | Compiles all source                                         |
| Cblmake PT*               | Compiles all source files that start with PT                |
| Cblmake PT* ALL           | Compiles all source files that start with PT                |
| Cblmake PT* INT           | Generates INT files for all source files that start with PT |
| Cblmake PT* GNT           | Generates GNT files for all source files that start with PT |
| Cblmake PT* EXE           | Generates EXE files for all source files that start with PT |
| Cblmake PTPDBTST INT      | Generates PTPDBTST.INT file                                 |
| Cblmake PTPDBTST INT LIST | Generates PTPDBTST.INT and source listing file              |
| Cblmake PTPDBTST GNT      | Generates PTPDBTST.GNT file                                 |
| Cblmake PTPDBTST EXE      | Generates PTPDBTST.EXE file                                 |

The LIST option creates a source listing file under *<compile directory>\<filename>.lis*. The LIST option is useful when the compile fails during the debugging phase. The source listing files show exactly where an error occurred. This option is not recommended when the program compiles successfully because the .LIS files can grow to be quite large.

---

**Note.** By default, when the program fails to compile, the system will generate a .LIS file.

---

To compile with CBLMAKE.BAT:

1. Verify that the %PS\_HOME% and %COBROOT% environment variables are set up correctly.
2. Open a command prompt window.
3. Make sure the compile directory exists; it may already exist if you've run CBLBLD.BAT. If it does exist, remove any files residing there—just as a safeguard. If it does not exist, you need to create it.

---

**Note.** Make sure you have write permission to *<compile directory>* as the compile process will take place there.

---

4. Change to the *PS\_HOME\setup* directory.
5. If the installation is Unicode, run CBL2UNI (with no parameters).
6. Execute the following command to copy all the COBOL source files from the *PS\_HOME* directory to the compile directory:

```
cblsrc <source directory> <compile directory>
```

where *<source directory>* is the drive and directory where the source resides (it should be the same as *PS\_HOME*), and *<compile directory>* is the drive and directory to which the source files will be copied.

For example, the following command will take the COBOL source from *PS\_HOME* and copy all the necessary files to the location where the compile process will take place.

```
cblsrc PS_HOME c:\temp\compile
```

If the COBOL source that will be compiled is different from the one under *PS\_HOME*, copy that COBOL source to *<compile directory>*.

---

**Note.** The compile in the next step will generate a GNT file unless the exception file, CBLINT.*XX* already exists (the *XX* represents the Product ID). CBLINT.*XX* contains the list of files that need to be compiled to the INT file. Make sure the intended CBLINT.*XX* is located under *<compile directory>* before executing CBLMAKE.

---

7. After CBLSRC completes, change directories to the compile directory, and run CBLMAKE.BAT, using the basic syntax as well as the CBLMAKE table shown earlier as your guide.
8. After CBLMAKE.BAT completes, copy the EXE, GNT, or INT files to the appropriate *PS\_HOME\CBLBINX* directory (CBLBINA or CBLBINU).

```
copy *.exe PS_HOME\cblbina
copy *.gnt PS_HOME\cblbina
copy *.int PS_HOME\cblbina
```

---

**Note.** You have to copy these files to the appropriate cblbin directory manually when you use CBLMAKE; they are not copied automatically, as when you use CBLBLD.

---

## Task 11A-4-2: Compiling COBOL on Microsoft Windows with a PS\_APP\_HOME Setup

This section discusses:

- Prerequisites
- Compiling with CBLBLD.BAT with a PS\_APP\_HOME Setup
- Compiling with CBLMAKE.BAT with a PS\_APP\_HOME Setup

### Prerequisites

This section assumes that you installed PeopleSoft application software to a *PS\_APP\_HOME* directory that is different from the *PS\_HOME* directory where you installed PeopleSoft PeopleTools. It also assumes that there is no separate *PS\_CUST\_HOME* directory with customized COBOL source files.

### Compiling with CBLBLD.BAT with a PS\_APP\_HOME Setup

The usage for running CBLBLD.BAT is:

```
cblbld <compile drive> <compile directory> [BUILD_option] [BUILD_home]
```

Substitute the appropriate values as follows:

- *<compile drive>*  
Enter the drive letter for the drive containing the directory where the compile takes place.
- *<compile directory>*

Enter the directory where the compile takes place. Be sure to include a space between <compile drive> and <compile directory>.

- **BUILD\_option**

The allowed values are nothing (blank), ASCII or Unicode.

BUILD\_option refers to the encoding scheme of your PeopleSoft installation. This parameter is optional.

- **BUILD\_home**

The allowed values are nothing (blank), PS\_HOME or PS\_APP\_HOME.

---

**Note.** The values PS\_HOME and PS\_APP\_HOME are case-insensitive.

---

BUILD\_home refers to the directory from which the COBOL source files will be compiled.

This parameter is optional.

- If the option is PS\_HOME, the COBOL source files placed under %PS\_HOME%\src\cbl will be compiled.
- If the option is PS\_APP\_HOME, the COBOL source files placed under %PS\_APP\_HOME%\src\cbl will be compiled.
- If the option is blank, the COBOL source files under %PS\_HOME%\src\cbl and COBOL source files under %PS\_APP\_HOME%\src\cbl will be compiled one after the other.

To compile COBOL sources on Microsoft Windows:

1. In a command prompt, set the environment variables described in this table:

| Environment Variable | Purpose                                                                                                                                           |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| PS_HOME              | PeopleSoft PeopleTools home directory—that is, the drive letter and high-level directory where you installed PeopleSoft PeopleTools.              |
| COBROOT              | Drive letter and root directory of the COBOL compiler.                                                                                            |
| PS_APP_HOME          | PeopleSoft Application home directory—that is, the drive letter and high-level directory where you installed the PeopleSoft Application software. |

For example:

```
set PS_HOME=C:\PTcompile
set COBROOT="C:\Program Files\Micro Focus\Net Express 5.1\base"
set PS_APP_HOME=C:\HRcompile
```

2. Change directory to *PS\_HOME*\setup:

```
cd %PS_HOME%\setup
```

3. Run CBLBLD.BAT, using one of these methods:

- To compile all the COBOL source files under your PeopleSoft application, that is, all PeopleSoft PeopleTools source files and all PeopleSoft Application source files, run this command:

```
cblbld <compile drive> <compile directory>
```

For example:

```
cblbld c: \temp\PTcompile
```

- To compile only PeopleSoft PeopleTools COBOL source files, run this command:

```
cblbld <compile drive> <compile directory> PS_HOME
```

For example:

```
cblbld c: \temp\PTcompile PS_HOME
```

- To compile only PeopleSoft Application COBOL source files, run this command:

```
cblbld <compile drive> <compile directory> PS_APP_HOME
```

For example:

```
cblbld c: \temp\HRcompile PS_APP_HOME
```

PeopleSoft PeopleTools COBOL compiled executables will be placed under the `<PS_HOME>\CBLBIN<X>` directory. PeopleSoft Application COBOL compiled executables will be placed under the `<PS_APP_HOME>\CBLBIN<X>` directory. CBLBIN<X> will be one of the following:

- CBLBINA if you are using ANSI encoding scheme
- CBLBINU if you are using Unicode encoding scheme

## Compiling with CBLMAKE.BAT with a PS\_APP\_HOME Setup

CBLBLD.BAT compiles all your COBOL source files at once, which can take a lot of time. CBLMAKE.BAT, in contrast, lets you employ one or more parameters to compile a specific COBOL source file or a selected group of COBOL source files. The procedure is slightly different depending upon whether the file that you want to compile is a PeopleSoft Application or PeopleSoft PeopleTools COBOL file. Both procedures are covered in this section.

---

**Note.** The options for CBLMAKE.BAT are defined in a table in the previous section Compiling with CBLMAKE.BAT with a `PS_HOME` Setup.

---

To compile a PeopleSoft Application COBOL file with CBLMAKE.BAT:

1. Open a command prompt window.
2. Verify that the `PS_HOME`, `COBROOT`, and `PS_APP_HOME` environment variables are set, as previously defined.

See Compiling with CBLBLD.BAT with a `PS_APP_HOME` Setup.

3. Verify that the environment variable `PS_compile_apps` is set, as follows:

```
set PS_compile_apps=Y
```

---

**Important!** This variable setting is required for individual file compilation with CBLMAKE.BAT.

---

4. Make sure the compile directory, `<compile directory>`, exists, and that you have write permission to it. This directory may already exist if you have run CBLBLD.BAT before. If it does exist, remove any files residing there—just as a safeguard. If it does not exist, you need to create it.
5. Change to the `PS_HOME\setup` directory.
6. If the installation is Unicode, run CBL2UNI (with no parameters).
7. Execute the following command to copy all the COBOL source files from the `PS_APP_HOME` directory to the compile directory:

```
cblsrc <source directory> <compile directory>
```

Here <source directory> is the drive and directory where the source resides (it should be the same as *PS\_APP\_HOME*), and <compile directory> is the drive and directory to which the source files will be copied.

For example, the following command will take the COBOL source from *PS\_APP\_HOME* and copy all the necessary files to the location where the compile process will take place, *c:\temp\HRcompile* in this example:

```
cblsrc %PS_APP_HOME% c:\temp\HRcompile
```

---

**Note.** The compile in the next step will generate a GNT file unless the exception file, *CBLINT.XX* already exists (the *XX* represents the Product ID). *CBLINT.XX* contains the list of files that need to be compiled to the INT file. Make sure the intended *CBLINT.XX* is located under <compile directory> before executing *CBLMAKE*.

---

- After *CBLSRC* completes, change directories to the compile directory, and run *CBLMAKE.BAT*, using the basic syntax as well as the *CBLMAKE* table shown earlier as your guide.

For example, to compile a file named *GPPDPRUN*, run this command:

```
cblmake GPPDPRUN
```

- After *CBLMAKE.BAT* completes, copy the EXE, GNT, or INT files to the appropriate <*PS\_APP\_HOME*>\CBLBIN<X> directory (CBLBINA for ANSI or CBLBINU for Unicode).

These examples use the ANSI encoding:

```
copy *.exe %PS_APP_HOME%\cblbina
copy *.gnt %PS_APP_HOME%\cblbina
copy *.int %PS_APP_HOME%\cblbina
```

---

**Note.** You have to copy these files to the appropriate *cblbin* directory manually when you use *CBLMAKE*; they are not copied automatically, as when you use *CBLBLD*.

---

- Verify that the compiler runtime files (*CBLINTS.DLL*, *CBLRTSM.DLL*, *CBLRTSS.DLL*, *CBLVIOM.DLL*, *CBLVIOS.DLL*, *COB32API.dll*, *MFLANGDF.lbr*) are present in the <*PS\_APP\_HOME*>\CBLBIN<X> directory.

If they are not present, then you will have to run *%PS\_HOME%\setup\cblrtcpy.bat* as follows:

```
cblrtcpy %PS_APP_HOME%\cblbina
```

The procedure to compile a PeopleSoft PeopleTools COBOL file with *CBLMAKE.BAT* is similar, but the environment variable *PS\_compile\_apps* must *not* be set.

- Open a command prompt window.
- Verify that the *PS\_HOME*, *COBROOT*, and *PS\_APP\_HOME* environment variables are set, as previously defined.

See *Compiling with CBLBLD.BAT with a PS\_APP\_HOME Setup*.

- Verify that the environment variable *PS\_compile\_apps* is *not* set, as follows:

```
set PS_compile_apps=
```

---

**Important!** Unsetting this environment variable is required for individual file compilation with *CBLMAKE.BAT* for PeopleSoft PeopleTools files.

---

- Make sure the compile directory, <compile directory>, exists, and that you have write permission to it.



This directory may already exist if you have run CBLBLD.BAT before. If it does exist, remove any files residing there—just as a safeguard. If it does not exist, you need to create it.

5. Change to the *PS\_HOME*\setup directory.
6. If the installation is Unicode, run CBL2UNI (with no parameters).
7. Execute the following command to copy all the COBOL source files from the *PS\_HOME* directory to the compile directory:

```
cblsrc <source directory> <compile directory>
```

where *<source directory>* is the drive and directory where the source resides (it should be the same as *PS\_HOME*), and *<compile directory>* is the drive and directory to which the source files will be copied.

For example, the following command will take the COBOL source from *PS\_HOME* and copy all the necessary files to the location where the compile process will take place, *c:\temp\PTcompile* in this example:

```
cblsrc %PS_HOME% c:\temp\PTcompile
```

8. After CBLSRC completes, change directories to the compile directory, and run CBLMAKE.BAT, using the basic syntax as well as the CBLMAKE table shown earlier as your guide.

For example, to compile a file named PTPDBTST, run this command:

```
cblmake PTPDBTST
```

9. After CBLMAKE.BAT completes, copy the EXE, GNT, or INT files to the appropriate *<PS\_HOME>*\CBLBIN<X> directory (CBLBINA for ANSI or CBLBINU for Unicode).

These examples use the ANSI encoding:

```
copy *.exe %PS_HOME%\cblbina
copy *.gnt %PS_HOME%\cblbina
copy *.int %PS_HOME%\cblbina
```

---

**Note.** You have to copy these files to the appropriate cblbin directory manually when you use CBLMAKE; they are not copied automatically, as when you use CBLBLD.

---

10. Verify that the compiler runtime files (CBLINTS.DLL, CBLRTSM.DLL, CBLRTSS.DLL, CBLVIOM.DLL, CBLVIOS.DLL, COB32API.dll, MFLANGDF.lbr) are present in the *<PS\_HOME>*\CBLBIN<X> directory.

If they are not present, then you will have to run *%PS\_HOME%\setup\cblrtcpy.bat* as follows:

```
cblrtcpy %PS_HOME%\cblbina
```

---

**Note.** If you plan to use *cblmake.bat* to compile a single (or a set) of PeopleSoft PeopleTools or PeopleSoft Application COBOL program at the same time, it would be a good idea to use two different command prompts and two different compile directories—one for PeopleSoft PeopleTools COBOL programs and the other for the PeopleSoft Application COBOL programs. This avoids setting and unsetting the *PS\_compile\_apps* environment variable.

---

## Task 11A-4-3: Compiling COBOL on Microsoft Windows with a PS\_CUST\_HOME Setup

This section discusses:

- Prerequisites
- Compiling with CBLBLD.BAT with a PS\_CUST\_HOME Setup

- Compiling with CBLMAKE.BAT with a PS\_CUST\_HOME Setup

## Prerequisites

This section assumes that you installed PeopleSoft application software to a *PS\_APP\_HOME* directory that is different from the *PS\_HOME* directory where you installed PeopleSoft PeopleTools. It also assumes that you have set up a *PS\_CUST\_HOME* environment variable for customized COBOL source files.

## Compiling with CBLBLD.BAT with a PS\_CUST\_HOME Setup

The usage for running CBLBLD.BAT is:

```
cblbld <compile drive> <compile directory> [BUILD_option] [BUILD_home]
```

Substitute the appropriate values as follows:

- <compile drive>  
Enter the drive letter for the drive containing the directory where the compile takes place.
- <compile directory>  
Enter the directory where the compile takes place. Be sure to include a space between <compile drive> and <compile directory>.
- BUILD\_option  
The allowed values are nothing (blank), ASCII or Unicode.  
BUILD\_option refers to the encoding scheme of your PeopleSoft installation. This parameter is optional.
- BUILD\_home  
The allowed values are nothing (blank), PS\_HOME, PS\_APP\_HOME, or PS\_CUST\_HOME.

---

**Note.** The values PS\_HOME, PS\_APP\_HOME, and PS\_CUST\_HOME are case-insensitive.

---

BUILD\_home refers to the directory from which the COBOL source files will be compiled.

This parameter is optional.

- If the option is PS\_HOME, the COBOL source files placed under %PS\_HOME%\src\cbl will be compiled.
- If the option is PS\_APP\_HOME, the COBOL source files placed under %PS\_APP\_HOME%\src\cbl will be compiled.
- If the option is PS\_CUST\_HOME, the COBOL source files placed under %PS\_CUST\_HOME%\src\cbl will be compiled.
- If the option is blank, the COBOL source files under %PS\_HOME%\src\cbl, under %PS\_APP\_HOME%\src\cbl (if PS\_APP\_HOME is different from PS\_HOME), and under %PS\_CUST\_HOME%\src\cbl will be compiled one after the other.

To compile COBOL sources on Microsoft Windows:

1. In a command prompt, set the environment variables described in this table:

| Environment Variable                    | Purpose                                                                                                                                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| PS_HOME                                 | PeopleSoft PeopleTools home directory—that is, the drive letter and high-level directory where you installed PeopleSoft PeopleTools.                      |
| PS_APP_HOME (if different from PS_HOME) | PeopleSoft Application home directory—that is, the drive letter and high-level directory where you installed the PeopleSoft Application software.         |
| PS_CUST_HOME                            | PeopleSoft Application customized home directory—that is, the drive letter and high-level directory containing your customized PeopleSoft COBOL programs. |
| COBROOT                                 | Drive letter and root directory of the COBOL compiler.                                                                                                    |

For example:

```
set PS_HOME=C:\PTcompile
set COBROOT="C:\Program Files\Micro Focus\Net Express 5.1\base"
set PS_CUST_HOME=C:\CUSTcompile

set PS_APP_HOME=C:\HRcompile
```

2. Change directory to *PS\_HOME*\setup:

```
cd %PS_HOME%\setup
```

3. Run CBLBLD.BAT, using one of these methods:

- To compile all the COBOL source files under your PeopleSoft application, that is, all PeopleSoft PeopleTools source files, all PeopleSoft Application source files, and all customized PeopleSoft source files, run this command:

```
cblbld <compile drive> <compile directory>
```

For example:

```
cblbld c: \temp\PTcompile
```

- To compile only PeopleSoft PeopleTools and PeopleSoft Application COBOL source files, run this command:

```
cblbld <compile drive> <compile directory> PS_HOME
```

For example:

```
cblbld c: \temp\PTcompile PS_HOME
```

- To compile only customized PeopleSoft Application or PeopleSoft PeopleTools COBOL source files, run this command:

```
cblbld <compile drive> <compile directory> PS_CUST_HOME
```

For example:

```
cblbld c: \temp\CUSTcompile PS_CUST_HOME
```

Delivered (that is, non-customized) PeopleSoft PeopleTools and PeopleSoft Application COBOL compiled executables will be placed under the `<PS_HOME>\CBLBIN<X>` directory. Customized PeopleSoft Application or PeopleSoft PeopleTools COBOL compiled executables will be placed under the `<PS_CUST_HOME>\CBLBIN<X>` directory. CBLBIN<X> will be one of the following:

- CBLBINA if you are using ANSI encoding scheme
- CBLBINU if you are using Unicode encoding scheme

## Compiling with CBLMAKE.BAT with a PS\_CUST\_HOME Setup

CBLBLD.BAT compiles all your COBOL source files at once, which can take a lot of time. CBLMAKE.BAT, in contrast, lets you employ one or more parameters to compile a specific COBOL source file or a selected group of COBOL files. The procedure is slightly different depending upon whether the file that you want to compile is a PeopleSoft Application, PeopleSoft PeopleTools, or customized COBOL source file. Both procedures are covered in this section.

---

**Note.** The options for CBLMAKE.BAT are defined in a table in the previous section Compiling with CBLMAKE.BAT with a `PS_HOME` Setup.

---

To compile a customized COBOL file with CBLMAKE.BAT:

1. Open a command prompt window.
2. Verify that the `PS_HOME`, `COBROOT`, `PS_APP_HOME` (if not the same as `PS_HOME`), and `PS_CUST_HOME` environment variables are set, as previously defined.

See Compiling with CBLBLD.BAT with a `PS_CUST_HOME` Setup.

3. Verify that the environment variable `PS_compile_cust` is set, as follows:

```
set PS_compile_cust=Y
```

---

**Important!** This variable setting is required for individual file compilation with CBLMAKE.BAT.

---

4. Ensure that the compile directory, `<compile directory>`, exists, and that you have write permission to it. This directory may already exist if you have run CBLBLD.BAT before. If it does exist, remove any files residing there—just as a safeguard. If it does not exist, you need to create it.
5. Change to the `PS_HOME\setup` directory.
6. If the installation is Unicode, run CBL2UNI (with no parameters).
7. Execute the following command to copy all the COBOL source files from the `PS_CUST_HOME` directory to the compile directory:

```
cblsrc <source directory> <compile directory>
```

Here `<source directory>` is the drive and directory where the source resides (it should be the same as `PS_CUST_HOME`), and `<compile directory>` is the drive and directory to which the source files will be copied.

For example, the following command will take the COBOL source files from `PS_CUST_HOME` and copy all the necessary files to the location where the compile process will take place, `c:\temp\CUSTcompile` in this example:

```
cblsrc %PS_CUST_HOME% c:\temp\CUSTcompile
```

---

**Note.** The compile in the next step will generate a GNT file unless the exception file, CBLINT.*XX* already exists (the *XX* represents the Product ID). CBLINT.*XX* contains the list of files that need to be compiled to the INT file. Make sure the intended CBLINT.*XX* is located under *<compile directory>* before executing CBLMAKE.

---

8. After CBLSRC completes, change directories to the compile directory, and run CBLMAKE.BAT, using the basic syntax as well as the CBLMAKE table shown earlier as your guide.

For example, to compile a file named GPPDPRUN, run this command:

```
cblmake GPPDPRUN
```

9. After CBLMAKE.BAT completes, copy the EXE, GNT, or INT files to the appropriate *<PS\_CUST\_HOME>*\CBLBIN*<X>* directory (CBLBINA for ANSI or CBLBINU for Unicode).

These examples use the ANSI encoding:

```
copy *.exe %PS_CUST_HOME%\cblbina
copy *.gnt %PS_CUST_HOME%\cblbina
copy *.int %PS_CUST_HOME%\cblbina
```

---

**Note.** You have to copy these files to the appropriate cblbin directory manually when you use CBLMAKE; they are not copied automatically, as when you use CBLBLD.

---

10. Verify that the compiler runtime files (CBLINTS.DLL, CBLRTSM.DLL, CBLRTSS.DLL, CBLVIOM.DLL, CBLVIOS.DLL, COB32API.DLL, MFLANGDF.lbr) are present in the *<PS\_CUST\_HOME>*\CBLBIN*<X>* directory.

If they are not present, then you will have to run %PS\_HOME%\setup\cblrtcpy.bat as follows:

```
cblrtcpy %PS_CUST_HOME%\cblbina
```

The procedure to compile a PeopleSoft PeopleTools COBOL file with CBLMAKE.BAT is similar, but the environment variable PS\_compile\_cust must *not* be set.

1. Open a command prompt window.
2. Verify that the PS\_HOME, COBROOT, and PS\_APP\_HOME environment variables are set, as previously defined.

See Compiling with CBLBLD.BAT with a PS\_APP\_HOME Setup.

3. Verify that the environment variable PS\_compile\_cust is *not* set, as follows:

```
set PS_compile_cust=
```

---

**Important!** Unsetting this environment variable is required for individual file compilation with CBLMAKE.BAT for PeopleSoft PeopleTools files.

---

4. Make sure the compile directory, *<compile directory>*, exists, and that you have write permission to it. This directory may already exist if you have run CBLBLD.BAT before. If it does exist, remove any files residing there—just as a safeguard. If it does not exist, you need to create it.
5. Change to the *PS\_HOME*\setup directory.
6. If the installation is Unicode, run CBL2UNI (with no parameters).
7. Execute the following command to copy all the COBOL source files from the *PS\_HOME* directory to the compile directory:

```
cblsrc <source directory> <compile directory>
```

Here *<source directory>* is the drive and directory where the source resides (it should be the same as *PS\_HOME*), and *<compile directory>* is the drive and directory to which the source files will be copied.

For example, the following command will take the COBOL source from *PS\_HOME* and copy all the necessary files to the location where the compile process will take place, *c:\temp\PTcompile* in this example:

```
cblsrc %PS_HOME% c:\temp\PTcompile
```

- After CBLSRC completes, change directories to the compile directory, and run CBLMAKE.BAT, using the basic syntax as well as the CBLMAKE table shown earlier as your guide.

For example, to compile a file named PTPDBTST, run this command:

```
cblmake PTPDBTST
```

- After CBLMAKE.BAT completes, copy the EXE, GNT, or INT files to the appropriate *<PS\_HOME>\CBLBIN<X>* directory (CBLBINA for ANSI or CBLBINU for Unicode).

These examples use the ANSI encoding:

```
copy *.exe %PS_HOME%\cblbina
copy *.gnt %PS_HOME%\cblbina
copy *.int %PS_HOME%\cblbina
```

---

**Note.** You have to copy these files to the appropriate cblbin directory manually when you use CBLMAKE; they are not copied automatically, as when you use CBLBLD.

---

- Verify that the compiler runtime files (CBLINTS.DLL, CBLRTSM.DLL, CBLRTSS.DLL, CBLVIOM.DLL, CBLVIOS.DLL, COB32API.DLL, MFLANGDF.lbr) are present in the *<PS\_HOME>\CBLBIN<X>* directory.

If they are not present, then you will have to run *%PS\_HOME%\setup\cblrtcpy.bat* as follows:

```
cblrtcpy %PS_HOME%\cblbina
```

---

**Note.** If you plan to use *cblmake.bat* to compile a single (or a set) of PeopleSoft PeopleTools or PeopleSoft Application COBOL program at the same time, it would be a good idea to use two different command prompts and two different compile directories—one for PeopleSoft PeopleTools COBOL programs and the other for the PeopleSoft Application COBOL programs. This avoids setting and unsetting the *PS\_compile\_cust* environment variable.

---

## Task 11A-4-4: Recompiling COBOL on Microsoft Windows

You always need to compile at installation, so you will only need to recompile COBOL in the following situations:

- You are installing PeopleSoft software for the first time.
- The supported COBOL compiler changes.
- You change the version of your RDBMS.
- You change the version of your operating system.
- You apply a PeopleSoft PeopleTools upgrade, patch, or fix.

You can recompile selected COBOL files by using CBLMAKE.BAT, or recompile all your COBOL source files by using CBLBLD.BAT.

---

**Note.** If you want to recompile all your COBOL, you can follow the appropriate procedure for compiling COBOL, as described earlier.

See *Compiling COBOL on Microsoft Windows with a PS\_HOME Setup*, *Compiling COBOL on Microsoft Windows with a PS\_APP\_HOME Setup*, or *Compiling COBOL on Microsoft Windows with a PS\_CUST\_HOME Setup*.

---

## Task 11A-4-5: Setting Up the Micro Focus Net Express Runtime

This section discusses:

- Understanding the Micro Focus Net Express Runtime
- Installing the Runtime Files and Setting Up the License
- Removing the Runtime License
- Troubleshooting

### Understanding the Micro Focus Net Express Runtime

The Micro Focus Net Express 5.1 Runtime provides the COBOL runtime environment required for COBOL programs to run. Install and license the runtime on each system that will run PeopleSoft COBOL applications. Typically, PeopleSoft COBOL application programs are run on PeopleSoft application server systems and PeopleSoft batch (Process Scheduler) systems.

The Micro Focus Net Express 5.1 Runtime consists of the following components:

- Six DLLs
  - CBLINTS.DLL
  - CBLRTSM.DLL
  - CBLRTSS.DLL
  - CBLVIOM.DLL
  - CBLVIOS.DLL
  - COB32API.DLL
- A Microsoft Windows registry entry for ASLMF  
For 64-bit Microsoft Windows systems, the entry is:  
HKEY\_LOCAL\_MACHINE\SOFTWARE\Wow6432Node\MICRO FOCUS\ASLMF
- The directory that contains the runtime license database, C:\psft-mf-nx-as-license, which contains the following files:
  - mfasdb
  - prodfile
  - semfile
- The Application Server License Manager Service

The Micro Focus Net Express 5.1 Runtime DLLs installation is done automatically as part of the COBOL compilation process. When CBLBLD.bat is run, it invokes CBLRTCPY.bat to copy the COBOL runtime DLLs listed above, from the %COBROOT%\bin directory to %PS\_HOME%\CBLBINx directory.

CBLBIN $x$  is CBLBINA, CBLBINE or CBLBINU, based on the compilation mode of ASCII, EBCDIC or Unicode respectively.

If you have already set up the Micro Focus Net Express COBOL compiler on a system, there is no explicit installation necessary for the runtime. For those systems where you only want to run COBOL, but have no need to compile it, use the following instructions in the section Installing the Runtime Files and Setting Up the License.

## Installing the Runtime Files and Setting Up the License

The license files are included with the files that you downloaded from Oracle Software Delivery Cloud. The Micro Focus Net Express 5.1 Wrap Pack 14 Runtime Licensing files are contained in the self-extracting zip file, MFLicense\_51WP14.exe. This executable provides the COBOL runtime system with unlimited runtime Net Express licenses specifically for PeopleSoft installations.

Always use the runtime files created for the version of the compiler that you used in compiling the COBOL files. For example, use the MFLicense\_51WP14.exe runtime license file for the Micro Focus Net Express 5.1 Wrap Pack 14 compiler.

This section assumes that:

- You installed and compiled the PeopleSoft COBOL application files on the runtime system.
- You saved the files from Oracle Software Delivery Cloud in a directory referred to as *NE\_INSTALL*.

To set up the runtime license:

1. Set the environment variable PS\_HOME to the directory where your PeopleSoft software is installed.

For example, use this command in a command prompt window:

```
set PS_HOME=C:\HR92
```

2. Delete the following Microsoft Windows registry entry if it exists:  
`\HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\Micro Focus\ASLMF`
3. Delete the directory `C:\psft-mf-nx-as-license` if it exists.
4. Go to *NE\_INSTALL*, and run the self-extracting zip file MFLicense\_51WP14.exe.
5. Specify the directory to save the files, for example `C:\MFLicense-Extract-51WP14`.
6. Change directory to `C:\MFLicense-Extract-51WP14` and run the script `setupMF.bat`.

This script makes the following changes:

- Installs the Micro Focus Net Express Application Server License Database.
  - Creates the Microsoft Windows registry entry  
`\HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\Micro Focus\ASLMF`, which point to the directory `c:\psft-mf-nx-as-license`.
  - Adds the files `mfasdb`, `prodfile`, and `semfile` to the directory `C:\psft-mf-nx-as-license`.
7. Run the command `MFLMWin` with the option to install, as follows:

```
MFLMWin.exe -i
```

8. To verify that the Micro Focus license manager was installed, run Microsoft Windows Services.

For example, run the following command in the command prompt window:

```
services.msc
```

You should see the service Micro Focus License Manager with status Started, and the Startup type should be Automatic.



## Removing the Runtime License

To uninstall the runtime license:

- Delete the Microsoft Windows registry key:  
   \HKEY\_LOCAL\_MACHINE\SOFTWARE\Wow6432Node\Micro Focus\ASLMF
- Delete the C:\psft-mf-nx-as-license directory and its contents.

## Troubleshooting

If you install the Micro Focus Net Express 5.1 Runtime License on a system where the Micro Focus Net Express 5.1 compiler is already installed, you see an error message that mentions that Runtime DLL CBLRRSS is not found. Use one of the following solutions:

- If the system where you are installing the license will be used only for running COBOL programs, but not compiling, remove the Micro Focus Net Express 5.1 COBOL compiler installation, and then re-install the Micro Focus Net Express 5.1 Runtime License.
- If the system where you are installing the license will be used for both compiling and running COBOL programs, just ignore the error message. The Net Micro Focus Express 5.1 COBOL compiler is already installed, and has an embedded runtime, which will be used to execute the COBOL programs. Thus there is no need to install and license the Micro Focus Net Express 5.1 Runtime.

If you see an error "ASLM: Erno 1000" it means the runtime license is not installed. Use the instructions in the earlier section to install the license.

See Installing the Runtime Files and Setting Up the License.

## Task 11A-4-6: Defining the GNT and INT Files

By default, the compile generates a GNT file unless the exception file, CBLINT.XX already exists. CBLINT.XX contains the list of files that need to be compiled to the INT file.

---

**Note.** The INT exception file is sometimes needed to overcome Micro Focus execution error with GNT files.

---

For example, the exception file, CBLINT.PT, where *PT* represents PeopleTools, would contain the following information:

```
Call cblcrint <file name without file extension>
```

or:

```
Call cblcprint PTPDBTST
```

## Task 11A-4-7: Distributing COBOL Binaries

After you have compiled your COBOL, you must transfer it to the needed locations. The required action depends upon how you set up *PS\_HOME*, *PS\_APP\_HOME*, and *PS\_CUST\_HOME*.

- *PS\_HOME* Setup

If the *PS\_APP\_HOME* location is the same as the *PS\_HOME* location:

Copy the contents of <*PS\_HOME*>\CBLBIN<*X*> (CBLBINA or CBLBINU) directory into <*PS\_HOME*>\CBLBIN<*X*> (CBLBINA or CBLBINU) on your batch and application server machines.

- *PS\_APP\_HOME* Setup

If the *PS\_APP\_HOME* location is different than the *PS\_HOME* location:

1. Copy the contents of <*PS\_HOME*>\CBLBIN<*X*> (CBLBINA or CBLBINU) directory into <*PS\_HOME*>\CBLBIN<*X*> (CBLBINA or CBLBINU) on your batch and application server machines.
2. Copy the contents of <*PS\_APP\_HOME*>\CBLBIN<*X*> (CBLBINA or CBLBINU) directory into <*PS\_APP\_HOME*>\CBLBIN<*X*> (CBLBINA or CBLBINU) on your batch and application server machines.

- *PS\_CUST\_HOME* Setup

If you have customized files in *PS\_CUST\_HOME*:

1. Copy the contents of <*PS\_HOME*>\CBLBIN<*X*> (CBLBINA or CBLBINU) directory into <*PS\_HOME*>\CBLBIN<*X*> (CBLBINA or CBLBINU) on your batch and application server machines.
2. If *PS\_APP\_HOME* is different from *PS\_HOME*, copy the contents of <*PS\_APP\_HOME*>\CBLBIN<*X*> (CBLBINA or CBLBINU) directory into <*PS\_APP\_HOME*>\CBLBIN<*X*> (CBLBINA or CBLBINU) on your batch and application server machines.
3. Copy the contents of <*PS\_CUST\_HOME*>\CBLBIN<*X*> (CBLBINA or CBLBINU) directory into <*PS\_CUST\_HOME*>\CBLBIN<*X*> (CBLBINA or CBLBINU) on your batch and application server machines.

## Chapter 11B

# Installing and Compiling COBOL on UNIX

This chapter discusses:

- Understanding COBOL
- Prerequisites
- Preparing COBOL for a PeopleTools-only Upgrade
- Installing Micro Focus Server Express for UNIX and Linux
- Using the Micro Focus COBOL Compiler on UNIX
- Installing IBM COBOL on IBM AIX
- Using the IBM COBOL Compiler on IBM AIX

## Understanding COBOL

---

This chapter describes how to compile and link PeopleSoft COBOL batch programs, if necessary.

COBOL is not needed for PeopleSoft PeopleTools because the Process Scheduler is written in C++. In addition, COBOL is not required for PeopleSoft applications that contain no COBOL programs. See My Oracle Support for the details on whether your application requires COBOL.

The chapter includes instructions for Micro Focus Net Express COBOL compiler, sometimes referred to here as "Micro Focus COBOL", and the IBM COBOL compiler for IBM AIX, sometimes referred to here as "IBM COBOL."

### See Also

"Preparing for Installation," Installing Supporting Applications

PeopleSoft Enterprise Frequently Asked Questions About PeopleSoft and COBOL Compilers, My Oracle Support, (search for the article name)

PeopleSoft Enterprise Frequently Asked Questions About PeopleSoft and the IBM COBOL Compiler, My Oracle Support, (search for the article name)

PeopleTools Certifications - Suggested Fixes COBOL, My Oracle Support, (search for the article name and select the current release)

*PeopleTools: Global Technology*, "Understanding COBOL in a Unicode Environment"

## Prerequisites

---

Before you attempt to run COBOL from the command line you should make sure the variable `PS_SERVER_CFG` points to a valid `pspres.cfg` file.

## Task 11B-1: Preparing COBOL for a PeopleTools-only Upgrade

---

When performing a PeopleTools-only upgrade, if you have COBOL modules, you must recompile all COBOL.

For Micro Focus Server Express COBOL, recompile and relink all COBOL programs for PeopleSoft PeopleTools and PeopleSoft applications, as described in a later section.

See *Using the Micro Focus COBOL Compiler on UNIX*.

## Task 11B-2: Installing Micro Focus Server Express for UNIX and Linux

---

This section discusses:

- Understanding Micro Focus Server Express
- Prerequisites
- Obtaining the Installation Files for Micro Focus Server Express from Oracle Software Delivery Cloud
- Installing Micro Focus Server Express

## Understanding Micro Focus Server Express

Micro Focus® Server Express™ 5.1 Wrap Pack 14 is the supported COBOL compiler on UNIX and Linux for the current PeopleSoft PeopleTools release. This section provides installation instructions for Micro Focus Server Express 5.1 Wrap Pack 14 COBOL compiler and the License Management Facility used to manage product licenses. These instructions are specifically for installing the Server Express COBOL compiler to use with PeopleSoft software. For more general installation instructions or other supporting documentation concerning Server Express, consult the documentation that comes with the installation software.

Note that Oracle is the exclusive reseller of the Micro Focus COBOL compiler for use with PeopleSoft applications.

### See Also

PeopleSoft Enterprise Frequently Asked Questions About PeopleSoft and COBOL Compilers, My Oracle Support, Doc ID 747059.1

Micro Focus web site: <http://supportline.microfocus.com/>

Server Express Documentation

Using the Micro Focus COBOL Compiler on UNIX

## Prerequisites

You must install the Micro Focus Server Express COBOL compiler on any machine that will compile, execute, or run COBOL programs. The Micro Focus Server Express COBOL compiler includes an embedded runtime system. You can compile COBOL programs on those servers for which you have licenses, and copy the compiled programs to other servers, but to run the compiled programs, you must also install the compiler with the runtime system.

In addition, in order to execute COBOL programs that are created using a Server Express product and deployed in a Linux or UNIX environment, the Server Express compiler with the embedded runtime system, must be installed on the target runtime system, and the "Micro Focus Application Server runtime license" must also be installed on the target runtime system.

For information on obtaining licenses for Micro Focus COBOL compilers, see:

- The documentation included with the software on Oracle Software Delivery Cloud.
  - The Micro Focus Server Express Extras Install Documentation for PeopleSoft and Runtime Licenses, includes information on how to add development, Application Server, and unlimited license patch (ULP) licenses
  - The Micro Focus COBOL for PeopleSoft Quick Reference Guide summarizes the delivered software and licensing requirements.
- PeopleSoft Enterprise Frequently Asked Questions About PeopleSoft and COBOL Compilers, My Oracle Support, Doc ID 747059.1.

If you have a previous Micro Focus COBOL product installed we recommend that you make a backup of any COBOL systems files that you have changed. Examples include cobkeymp, ADISCTRL, cobopt and cobconfig. After you have installed Server Express you might want to apply to the new COBOL product the changes previously applied to these files.

If you want to maintain more than one COBOL installation, Oracle recommends that you do not install one version over another. Instead, use one of these suggested methods:

- Remove (uninstall) the existing version before installing the new version
- Leave the existing version in its current directory (do not move it) and install the new version in its own, different directory.

If you have installed, or plan to install, Micro Focus Application Server or any other Micro Focus product on the same machine as this product, you must install them in different directories.

This Micro Focus product is managed by a License Management Facility (LMF). This facility helps you keep track of the number of licenses you have for the product. In order to use this product it is necessary for you to install the License Management Facility (which is provided with the Server Express software). This software should not be installed in the same directory as Server Express. The default directory depends upon the operating system; for example:

- /opt/lib/mflmf for HP-UX Itanium
- /usr/lib/mflmf for RS/6000 and PowerPC systems running AIX
- /opt/lib/mflmf on other systems

If /opt/lib does not exist, use /usr/lib/mflmf instead.

## Task 11B-2-1: Obtaining the Installation Files for Micro Focus Server Express from Oracle Software Delivery Cloud

The Micro Focus Server Express installation files are available on Oracle Software Delivery Cloud. At this point you should have already downloaded the necessary files. This section includes additional information on finding and using the files for Micro Focus Server Express if necessary.

See "Preparing for Installation," Using Oracle Software Delivery Cloud to Obtain Installation Files.

To obtain the files for the Micro Focus Server Express installation:

1. Log in to Oracle Software Delivery Cloud at <https://edelivery.oracle.com>.
2. Enter Micro Focus in the type-ahead Product field, and select Micro Focus International Ltd. Server Express COBOL for UNIX from the drop-down list.
3. Click Select Platform, select the operating system you are running on, and then click Select.
4. Click Continue.
5. Click Continue.
6. Read the license agreement, select the check box to acknowledge that you accept the terms, and then click Continue.
7. Click one of the file names to download an individual zip file, or click Download All to obtain all of the files listed.

The files include software, wrap packs, and documentation. Save the zip files to a temporary directory on your local system. You must extract (unzip) the file on the platform for which it is intended. For example, if you download the zip file for Oracle Solaris, you must unzip it on Oracle Solaris to avoid problems. If you unzip the file to a staging directory on a Microsoft Windows computer and copy the staging directory to an Oracle Solaris computer, the stage area files may be corrupt.

## Task 11B-2-2: Installing Micro Focus Server Express

The following section is provided as an example installation and illustrates a typical Micro Focus Server Express 5.1 Wrap Pack 14 installation for PeopleSoft application, as outlined in the overview section above.

The answers to the prompts provided in the following example are recommended by Oracle for PeopleSoft installations, with the exception of the installation directory for the Micro Focus License Management Facility. For this step, you can use the default directory names or choose directory names based on your site's naming conventions.

It is recommended by Micro Focus and Oracle to install LMF in its own directory, instead of in a sub-directory of the Server Express install.

---

**Important!** Make sure to specify the *correct* bit mode for your UNIX platform. Enter *64* for all UNIX platforms.

---

The following example was done on a Red Hat Linux x86-64 operating system platform. Installation prompts will vary slightly with respect to specifics of the different UNIX platforms.

1. Log in as root.
2. Create a directory (if it does not exist) where you want to install the Micro Focus Server Express 5.1 Wrap Pack 14. For example:  

```
$ mkdir -p /products/mf/svrexpress-5.1_wp14-64bit
```
3. Change directory to the one you created in the previous step.

```
$ cd /products/mf/svrex-5.1_wp14-64bit
```

4. Copy or ftp the Micro Focus Server Express 5.1 Wrap Pack 14 tar file that you obtained from Oracle Software Delivery Cloud to this directory.

In this example, the file name is `sx51_wp14_redhat_x86_64_dev.tar`.

5. List the items in the directory with the following command:

```
$ ls -l /products/mf/svrex-5.1_wp14-64bit
total 409600
-rwxr-xr-x  1 root  root          209295360 Feb 03 19:23 sx51_wp14_redhat_
x86_64_dev.tar
```

6. Extract the tar file:

```
$ tar -xvf sx51_wp14_redhat_x86_64_dev.tar
```

7. List the items in the directory with the following command:

```
$ ls
ADISCTRL  bin      demo      dialog    dynload   es         etc        =>
install   lib      snmp      sx51_ws6_redhat_x86_64_dev.tar  xdb  aslmf     =>
cpylib    deploy  docs      dynload64  eslmf-mess  include  lang      lmf =>
src       terminfo
```

8. To begin the installation, type:

```
$sh ./install
```

9. Read the text and follow the instructions to review the `readme.txt` file:

```
This script will install Micro Focus Server Express 5.1 on this=>
computer.
```

```
The readme.txt file included in this delivery contains details of new=>
features, enhancements and any restrictions of which you should be=>
aware. This file is located in :
```

```
/products/mf/svrex-5.1_wp14-64bit/docs
```

```
We strongly recommend you read this file once the installation is=>
complete.
```

```
Do you wish to continue (y/n): y
```

10. Read the following License Agreement and type `y` (yes) to accept it:

```
Before installing and using this software product you must agree to be=>
bound by the terms and conditions of the end user license agreement =>
("License Agreement") which accompanies this product. Please take=>
this time to read the License Agreement. If you are not in agreement=>
with the terms and conditions of the License Agreement, please return=>
the product to your Account Representative and your money will be=>
refunded. If you require a replacement copy of the License Agreement,=>
please contact your Account Representative before proceeding with the=>
```

install process.

Do you agree to the terms of the License Agreement? (y/n): **y**

11. If you are installing on an operating system platform that Micro Focus has not built the product on, you see the following message. Type y (yes) at the prompt:

```
Micro Focus Install
```

```
This product was not built or tested on this version of the Operating⇒
System.
```

```
This product was built on Operating System:
```

```
RedHatEnterpriseServer 2.6.18-348.el5 x86_64
```

```
Red Hat Enterprise Linux Server release 5.9 (Tikanga)
```

```
and you are installing it on Operating System:
```

```
Linux 3.8.13-16.2.1.el6uek.x86_64
```

```
Any product issues you report will only be corrected if they can be⇒
reproduced on one of our systems running:
```

```
RedHatEnterpriseServer 2.6.18-348.el5 x86_64
```

```
Red Hat Enterprise Linux Server release 5.9 (Tikanga)
```

```
OracleServer 3.8.13-35.3.5.el6uek.x86_64 x86_64
```

```
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
RedHatEnterpriseServer 2.6.18-398.el5 x86_64
```

```
Red Hat Enterprise Linux Server release 5.11 (Tikanga)
```

```
RedHatEnterpriseServer 2.6.32-504.el6.x86_64 x86_64
```

```
Red Hat Enterprise Linux Server release 6.6 (Santiago)
```

```
Please confirm that you want to continue with this installation (y/n): y
```

12. After reading the following information press ENTER to continue:

```
When you press return you will be shown details of the reference⇒
environment (and any compatibility environments).
```

```
Please press return when you are ready:
```

13. Type y (yes) to continue after reading the listing of the reference environment. For the sake of brevity, the text has been truncated, as indicated by [...].

```
This product is certified on the following reference environment:
```

```
The command(s) used to gather the information is given following each⇒
entry.
```

```
Operating System
```

```
-----
```

```
RedHatEnterpriseServer 2.6.18-348.el5 x86_64
```

```
Red Hat Enterprise Linux Server release 5.9 (Tikanga)
```

```
lsb_release -si
```

```
uname -r
```

```
uname -m
```

```
cat /etc/redhat-release
```

```
C Compiler
```

```
-----
```

```
cc gcc version 4.1.2 20080704 (Red Hat 4.1.2-54)
```



```
gcc -v 2>&1 | tail -1
```

```
C++ Compiler
```

```
-----
```

```
/usr/bin/g++ gcc version 4.1.2 20080704 (Red Hat 4.1.2-54)
```

```
g++ -v 2>&1 | tail -1
```

```
Assembler
```

```
-----
```

```
as GNU assembler version 2.17.50.0.6-20.el5_8.3 (x86_64-redhat-linux)⇒  
  using BFD version 2.17.50.0.6-20.el5_8.3 20061020
```

```
as -v 2>&1 < /dev/null
```

```
Linker
```

```
-----
```

```
ld GNU ld version 2.17.50.0.6-20.el5_8.3 20061020
```

```
ld -V 2>&1 | head -1
```

```
Supported versions of Java
```

```
-----
```

```
Java version = 1.6.0_15  
Java vendor = Sun Microsystems Inc.  
Java OS name = Linux  
Java OS arch = amd64  
Java OS version = 2.6.18-348.el5
```

```
Java version = 1.6.0_15  
Java vendor = Sun Microsystems Inc.
```

```
Java OS name = Linux  
Java OS arch = amd64  
Java OS version = 2.6.18-348.el5
```

```
Java version = 1.7.0_05  
Java vendor = Oracle Corporation  
Java OS name = Linux  
Java OS arch = i386  
Java OS version = 2.6.18-348.el5
```

```
Java version = 1.7.0_05  
Java vendor = Oracle Corporation  
Java OS name = Linux  
Java OS arch = amd64  
Java OS version = 2.6.18-348.el5
```

```
$JAVA_HOME/bin/java -classpath $COBDIR/lib WhatJava
```

```
Unicode
```

```
-----
```

```
Unicode mapping tables must be installed for J2EE and Web Services to
```

function correctly. These tables are required for converting between any combination of UTF-16/UCS-2, UTF-8 and other installed locales.

[...]

Please confirm your understanding of the above reference environment⇒ details (y/n): **y**

If you require this support, you will need to install the TCP/IP⇒ Development System libraries prior to installation of your COBOL⇒ system.

14. Answer *n* (no) to the following prompt:

Do you want to make use of COBOL and Java working together? (y/n): **n**  
Skipping Java setup

Should you want to use Java with COBOL later on as super user, run the⇒ command /products/mf/svrex-5.1\_wp14-64bit/bin/java\_setup to select⇒ the version of Java you want to use.

---

**Note.** PeopleSoft COBOL implementations do not require COBOL and Java to work together.

---

15. Answer *y* (yes) to the following prompt concerning the License Management Facility:

This product is protected using the Micro Focus License Management⇒ Facility (LMF). Please refer to the Development System Licensing Guide⇒ for information relating to the installation of the licensing system⇒ and licenses.

If you do not have LMF installed or want to upgrade to the latest⇒ version, we recommend that you install it now.

Would you like to install LMF now? (y/n): **y**

16. At the following prompt, enter the directory name where you want to install License Manager.

---

**Note.** Micro Focus and Oracle recommend that you install LMF in its own directory, instead of a sub-directory of the Server Express installation.

---

Enter the directory name where you wish to install License Manager.  
(Press Enter for default directory /opt/microfocus/mflmf)

**/products/mf/mflmf-svrex-5.1\_wp14-64bit**

17. Enter *y* (yes) to restrict access to the License Admin System to the superuser account:

Do you want only superuser to be able to access the License Admin⇒ System? (y/n) **y**

18. Enter *y* (yes) to start license manager automatically at boot time:

It is recommended that you let license manager autostart at boot time.

Do you want license manager to be automatically started at boot time? ⇒ (y/n) **y**

LMF installation complete.

19. If you want to consult the documentation on how to install licenses, follow the instructions in this prompt:

```
Please consult the Development Licensing Guide for detailed information⇒
on how to install licenses.
```

```
This may be done by running the mflicense tool.
```

```
-----
To run your applications you need a deployment license installed using⇒
Apptrack.
```

```
See your Deployment Licensing Guide for details.
Installing Apptrack...
```

```
Access permissions on directory /var/mfaslmf have changed on this⇒
release
```

```
Write access permission has been removed except for superuser use
Apptrack installation complete
```

20. Enter *64* for the system default bit mode:

```
This product can be used in either 32-bit or 64-bit modes.
Please enter either 32 or 64 to set the system default mode: 64
System default COBMODE has been set to 64.
```

21. Wait for the documentation to be installed:

```
Installing documentation. Please wait...
```

22. Enter *n* (no) at the following prompt:

```
Enterprise Server provides a scalable, managed, and high-performance⇒
transactional environment for the deployment of COBOL applications and⇒
services, COBOL/J2EE applications and direct COBOL Web Services.
```

```
Your Enterprise Server requires configuration. You can either do it now⇒
or later. To do it now, you need to know the alphanumeric user ID of⇒
the Enterprise Server System Administrator.
```

```
To do it later, enter the following commands whilst logged in as root:
```

```
/products/mf/svrexp-5.1_wp14-64bit/bin/eslminstall
/products/mf/svrexp-5.1_wp14-64bit/bin/casperm
```

```
Do you wish to configure Enterprise Server now? (y/n): n
```

23. Review the information concerning setting the COBDIR, LD\_LIBRARY\_PATH, and PATH environment variables in the concluding prompt:

```
(Remember to set COBDIR to /products/mf/svrexp-5.1_wp14-64bit, include ⇒
/products/mf/svrexp-5.1_wp14-64bit/lib in LD_LIBRARY_PATH, and include ⇒
/products/mf/svrexp-5.1_wp14-64bit/bin on your PATH.)
```

```
WARNING: Any executables (whether a Run-Time System or an application)⇒
must be relinked using this new release. Otherwise, the results of⇒
running the older executables with this new release are undefined.
```

```
Installation completed successfully.
```

The COBOL system is ready to use.

## **Task 11B-3: Using the Micro Focus COBOL Compiler on UNIX**

---

This section discusses:

- Understanding COBOL Compilation
- Setting Environment Variables
- Modifying the Liblist64 File (IBM AIX)
- Compiling COBOL on UNIX with a PS\_HOME Setup
- Compiling COBOL on UNIX with a PS\_APP\_HOME Setup
- Compiling COBOL on UNIX with a PS\_CUST\_HOME Setup
- Linking COBOL
- Recompiling COBOL on UNIX

### **Understanding COBOL Compilation**

On UNIX and Linux operating systems, you always need to compile your COBOL programs at installation time. After you set up your application or batch server, perform the steps discussed in this section.

The Micro Focus Server Express COBOL compiler includes an embedded runtime system, so the compiler must be installed on machines that will compile the COBOL programs and also on any machine where COBOL programs are to be executed or run.

You have two options for compiling:

- You can treat one application or batch server as your compile server, compile all your COBOL programs there, and then distribute cblbin from there to all other relevant servers. In this case, you would copy any patches and customizations from your file server to this designated server before carrying out the compile. You would also need to install the Server Express compiler on all servers, in order to have the embedded runtime system present.
- The second option is to compile on all servers. In this situation, all servers would need a COBOL compiler, and you would need to copy any patches and customizations from the file server to all of these servers before carrying out the compile.

---

**Note.** You should have read/write access to the directory *PS\_HOME/cblbin* to be able to compile the COBOL programs.

---

**Note.** To copy a compiled COBOL program from one UNIX server to another, they must be on the same operating system that the compile took place on. For example, if you compile on Oracle Solaris for the Application Server, and the Process Scheduler is on AIX, you cannot copy the compiled program (you will also need to compile on the AIX machine).

---

The way that you set up your installation environment determines how you compile COBOL. This section includes different procedures for the different installation environments, as follows:

- *PS\_HOME Setup*

If you installed the PeopleSoft Application software to a *PS\_APP\_HOME* location that is the same as the *PS\_HOME* location where you installed PeopleSoft PeopleTools, follow the instructions in the section *Compiling COBOL on UNIX with a PS\_HOME Setup*.

- *PS\_APP\_HOME Setup*

As described earlier, for PeopleSoft PeopleTools 8.52 and later, you have the option to install the PeopleSoft Application software to a location outside *PS\_HOME*. If the *PS\_APP\_HOME* environment variable is defined and is different from *PS\_HOME*, the COBOL build scripts behave differently under certain build options. There are also some new build options under certain environments which would be recognized if *PS\_APP\_HOME* is defined.

If you installed the PeopleSoft Application software to a *PS\_APP\_HOME* location that is different from the *PS\_HOME* location where you installed PeopleSoft PeopleTools, follow the instructions in the section Compiling COBOL on UNIX with a *PS\_APP\_HOME* Setup.

- *PS\_CUST\_HOME Setup*

For PeopleSoft PeopleTools 8.53 and later, you have the option to place customized COBOL baseline sources into a location referenced by the environment variable *PS\_CUST\_HOME*.

The *PS\_CUST\_HOME* directory structure must replicate that of *PS\_HOME* or *PS\_APP\_HOME*; that is, any COBOL source file that is customized should be placed in the same relative path as was present in the original location. If your environment includes customized files in a *PS\_CUST\_HOME* directory, follow the instructions in the section Compiling COBOL on UNIX with a *PS\_CUST\_HOME* Setup.

## See Also

"Preparing for Installation," Defining Installation Locations.

## Task 11B-3-1: Setting Environment Variables

On your UNIX system, you need to log in and ensure the following environment variables are set appropriately. Alternatively, make sure the following environment variables are set in the *.profile* file in the user's home directory:

- *\$COBDIR* must be set to the Micro Focus Server Express installation; for example:  

```
COBDIR=/products/mf/svrexpr-51_wp14;export COBDIR
```
- *\$COBDIR/lib* must be appended to *LD\_LIBRARY\_PATH*, *LIBPATH*, or *SHLIB\_PATH*, whichever is appropriate for your platform.  

```
LD_LIBRARY_PATH=$LD_LIBRARY_PATH:$COBDIR/lib; export LD_LIBRARY_PATH
LIBPATH=$LIBPATH:$COBDIR/lib; export LIBPATH
SHLIB_PATH=$SHLIB_PATH:$COBDIR/lib; export SHLIB_PATH
```
- *\$COBDIR/bin* must be appended to the *PATH*; for example:  

```
PATH=$PATH:$COBDIR/bin;export PATH
```

To set the required DB2/LUW environment, run *db2profile*. Enter the following command:

```
cd <DB2 INSTANCE DIRECTORY>/sqllib
. ./db2profile
```

To set the required PeopleSoft environment variables, source the script *psconfig.sh*. Enter the following command from the *PS\_HOME* directory:

```
. ./psconfig.sh
```

## Task 11B-3-2: Modifying the Liblist64 File (IBM AIX)

### Understanding Liblist Modifications

If you are compiling COBOL on AIX, modify the liblist64 file as described here. Check My Oracle Support for additional information about modifications that need to be made in the liblist64 file for COBOL.

See My Oracle Support, Certifications.

### Modifying the Liblist64 File for AIX

To modify the liblist64 file for AIX:

1. cd to \$COBDIR/lib.
2. Add the following line to the liblist file:

```
x:*:s!t:-lC
```

The following listing shows where to make the changes (in bold font):

```
#      More emulation of cc (MUST be after MF/user libraries):
x:*:st:-L/usr/lib/threads
x:*:st:-lpthreads
x:*:s!t:-lC                <=== Add this line
x:*:s:-lc
```

## Task 11B-3-3: Compiling COBOL on UNIX with a PS\_HOME Setup

This section assumes that you installed the PeopleSoft Application software to a *PS\_APP\_HOME* directory that is the same as the *PS\_HOME* directory where you installed PeopleSoft PeopleTools. It also assumes that there is no separate *PS\_CUST\_HOME* directory with customized COBOL source files.

To compile COBOL on UNIX:

1. If you haven't already done so, download all required patches to your file server, and from there FTP the contents of src\cbl\base and src\cbl\unix over to src/cbl on the relevant application or batch server.

---

**Note.** When you copy patches over from the file server, the files need to have a lowercase cbl extension and an uppercase program name, as in PATCH.cbl.

---

2. Source the script psconfig.sh from *PS\_HOME* to set up environment variables correctly on your application or batch server.

```
. ./psconfig.sh
```

3. Change to the *PS\_HOME/setup* directory:

```
cd $PS_HOME/setup
```

4. To compile all the COBOL source dynamically, issue the command:

```
./pscbl.mak
```

The dynamic compile creates INT, LST, and GNT files, which are copied to these locations:

| File | Location                    |
|------|-----------------------------|
| INT  | <i>PS_HOME</i> /src/cbl/int |
| LST  | <i>PS_HOME</i> /src/cbl/lst |
| GNT  | <i>PS_HOME</i> /cblbin      |

**Warning!** Proposed ISO 2000 COBOL features are enabled. Please refer to documentation for details, and do not rely on these features being supported in future products from Micro Focus due to changes in the proposed COBOL standard.

**Note.** For Server Express, PeopleSoft sets the COBOL directive INTLEVEL to 4. Setting this directive to this value enables you to raise the significant digits of numeric fields from 18 to 31. This is in accordance with the ISO 2000 COBOL standard. During the compilation of each program, the vendor of Server Express will display a warning. This should not be considered a compilation error.

### Task 11B-3-4: Compiling COBOL on UNIX with a PS\_APP\_HOME Setup

This section assumes that you installed the PeopleSoft Application software to a *PS\_APP\_HOME* directory that is different from the *PS\_HOME* directory where you installed PeopleSoft PeopleTools. It also assumes that there is no separate *PS\_CUST\_HOME* directory with customized COBOL source files.

Use the shell script *pscbl.mak*, found in *PS\_HOME/setup*, to do the PeopleSoft COBOL compilation. This table describes the allowed arguments for *pscbl.mak*:

| Command                                | Description                                                                                                              |
|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| <i>pscbl.mak</i>                       | Use this command, with no argument, to compile all the COBOL programs.                                                   |
| <i>pscbl.mak PS_HOME</i>               | Use this argument to compile only the PeopleSoft PeopleTools COBOL programs.                                             |
| <i>pscbl.mak PS_APP_HOME</i>           | Use this argument to compile only the PeopleSoft Application COBOL programs.                                             |
| <i>pscbl.mak &lt;COBOL_PROGRAM&gt;</i> | Enter the name for a valid PeopleSoft PeopleTools or PeopleSoft Application COBOL program to compile a specific program. |

If you specify any argument other than the ones mentioned above, you will get the following usage display message:

```
echo Correct usage of the program is:
```

```

echo 1. pscbl.mak
echo 2. pscbl.mak PS_HOME
echo 3. pscbl.mak PS_APP_HOME
echo 4. pscbl.mak PTPDBTST (or any tools/apps program, Note Peoplesoft⇒
COBOL programs are 6, 7 or 8 characters long)

```

To compile COBOL programs on UNIX:

1. Set `PS_HOME` environment variable in the UNIX shell prompt from which you want to run the COBOL compile.

You can run `PS_HOME/psconfig.sh` with the following command to set the `PS_HOME` environment variable in the shell.

```

cd <PS_HOME>
. ./psconfig.sh

```

Verify if `PS_HOME` is set with this command:

```

$ echo $PS_HOME
$ /home/<user>/PTcompile

```

2. Set the `PS_APP_HOME` environment variable (`PS_APP_HOME` refers to the location where you have installed the PeopleSoft Application software) with this command:

```
PS_APP_HOME=/home/<user>/HRcompile; export PS_APP_HOME
```

3. Run `pscbl.mak`, using one of these methods:

- To compile all PeopleSoft COBOL programs, that is, those for PeopleSoft PeopleTools and PeopleSoft Application, run this command:

```
pscbl.mak
```

This will compile the programs that are under `PS_HOME/src/cbl` and `PS_APP_HOME/src/cbl`.

- To compile only PeopleSoft PeopleTools COBOL programs, run this command:

```
pscbl.mak PS_HOME
```

- To compile only PeopleSoft Application COBOL programs, run this command:

```
pscbl.mak PS_APP_HOME
```

- To compile a single COBOL program, run the command with the COBOL program name excluding the `.cbl` extension.

For example, for a PeopleSoft PeopleTools COBOL program `PTPDBTST.CBL`, or a PeopleSoft Application COBOL program `GPPDPRUN.CBL`, run:

```

pscbl.mak PTPDBTST
pscbl.mak GPPDPRUN

```

PeopleSoft PeopleTools compiled COBOL programs will be placed under the `PS_HOME\cblbin` directory. PeopleSoft Application compiled COBOL programs will be placed under the `PS_APP_HOME\cblbin` directory.

### Task 11B-3-5: Compiling COBOL on UNIX with a `PS_CUST_HOME` Setup

This section assumes that you have set up a `PS_CUST_HOME` environment variable for customized COBOL source files.

To compile COBOL programs on UNIX:



1. Set `PS_HOME` environment variable in the UNIX shell prompt from which you want to run the COBOL compile.

You can run `PS_HOME/psconfig.sh` with the following command to set the `PS_HOME` environment variable in the shell:

```
cd <PS_HOME> . ./psconfig.sh
```

Verify if the `PS_HOME` environment variable is set with this command:

```
$ echo $PS_HOME $ /home/<user>/PTcompile
```

2. If `PS_APP_HOME` is different from `PS_HOME`, set the `PS_APP_HOME` environment variable with this command:

```
PS_APP_HOME=/home/<user>/HRcompile; export PS_APP_HOME
```

3. Set the `PS_CUST_HOME` environment variable with this command:

```
PS_CUST_HOME=/home/<user>/CUSTcompile; export PS_CUST_HOME
```

4. To compile all the COBOL source under `PS_CUST_HOME` dynamically, issue the command:

```
./pscbl.mak PS_CUST_HOME
```

PeopleSoft PeopleTools compiled COBOL programs and PeopleSoft Application compiled COBOL programs will be placed under the `PS_CUST_HOME\cblbin` directory.

## Task 11B-3-6: Linking COBOL

This section discusses:

- Understanding COBOL Linking
- Linking COBOL Components on UNIX

### Understanding COBOL Linking

PSRUN is the PeopleSoft procedure that connects the COBOL batch programs with the RDBMS API.

PSRUNRMT is the PeopleSoft procedure that connects the remote COBOL programs with the RDBMS API.

Both PSRUN and PSRUNRMT are compiled uniquely for each platform and consist of modules provided with PeopleSoft software, the RDBMS platform, and the operating system.

You need to create the PSRUN and PSRUNRMT programs in the following situations:

- You are installing PeopleSoft software for the first time.
- Any COBOL programs have changed.
- The version of the RDBMS running the PeopleSoft system has changed.
- The COBOL compiler has changed.
- One of the C programs supplied with the PeopleSoft system has changed.

---

**Note.** The PeopleSoft system only supports dynamic linking of COBOL. Static linking is not an option.

---

## Linking COBOL Components on UNIX

To link COBOL components on UNIX:

1. Change to the *PS\_HOME*/setup directory:

```
cd $PS_HOME/setup
```

2. For dynamic linking, run:

```
./psrun.mak
```

The PSRUN.MAK script should return the UNIX prompt when done. If the compile completes without errors, the files PSRUN and PSRUNRMT will now exist in the *PS\_HOME*/bin directory. If you encounter errors, check *PS\_HOME*/setup/psrun.err and *PS\_HOME*/setup/psrunrmt.err

If you are running on an Oracle 11.2.0.4 database platform, you may see the following error when you attempt to compile:

```
"Undefined symbol nzosSCSP_SetCertSelectionParams referenced in file /products/oracle/11.2.0.4.0-64bit/lib/libclntsh.so.11.1"
```

To resolve this problem:

1. Edit the LD\_LIBRARY\_PATH environment variable so that \$ORACLE\_HOME/lib comes before \$TUXDIR/lib.
2. Execute psrun.mak again.
3. Reverse the change you made in step 1.

## Task 11B-3-7: Recompiling COBOL on UNIX

You always need to compile at installation, so you will only need to recompile COBOL in the following situations:

- You are installing PeopleSoft software for the first time.
- The supported COBOL compiler changes.
- You change the version of your RDBMS.
- You change the version of your operating system.
- You apply a PeopleSoft PeopleTools upgrade, patch, or fix.

---

**Note.** Remember, you must always use your file server as the source repository for your COBOL. You should download any patches and apply any customizations to the file server, and disseminate them from there.

---

You can compile a *single* COBOL program dynamically by using this command syntax:

```
./pscbl.mak <PROGRAM NAME WITHOUT "cbl" EXTENSION>
```

For example, the following command compiles the lone file PTPDBTST.

```
./pscbl.mak PTPDBTST
```

---

**Note.** If you want to recompile all your COBOL, you can follow the appropriate procedure as described earlier.

See Compiling COBOL on UNIX with a PS\_HOME Setup, Compiling COBOL on UNIX with a PS\_APP\_HOME Setup, or Compiling COBOL on UNIX with a PS\_CUST\_HOME Setup.

---

The compile should run without errors until it completes. After the script is complete, check the destination directories for the newly created files. They should have a length greater than zero as well as a current date and time stamp. You can find the files in the following locations:

- For PS\_HOME Setup: *PS\_HOME/src/cbl/int*, *PS\_HOME/src/cbl/lst*, and *PS\_HOME/cblbin*
- For PS\_APP\_HOME Setup: *PS\_APP\_HOME/src/cbl/int*, *PS\_APP\_HOME/src/cbl/lst*, and *PS\_APP\_HOME/cblbin*
- For PS\_CUST\_HOME Setup: *PS\_CUST\_HOME/src/cbl/int*, *PS\_CUST\_HOME/src/cbl/lst*, and *PS\_CUST\_HOME/cblbin*

---

**Note.** You can also use *pscbl.mak PTP\*\*\** to compile all source files that start with PTP.

---

## **Task 11B-4: Installing IBM COBOL on IBM AIX**

---

This section discusses:

- Understanding the IBM COBOL for AIX Installation
- Prerequisites
- Installing IBM COBOL for AIX v4.1.1.1

### **Understanding the IBM COBOL for AIX Installation**

The IBM COBOL for AIX compiler version 4.1.1.1 is supported for the current PeopleSoft PeopleTools release. This section includes the installation of the IBM COBOL Compiler on IBM AIX.

### **Prerequisites**

To install and use IBM COBOL for AIX 4.1.1.1, you must have the following:

- PeopleSoft PeopleTools
  - We recommend that you take the latest available PeopleSoft PeopleTools patch level. You should install PeopleSoft PeopleTools and your PeopleSoft application software before you compile the IBM COBOL for AIX source files.
- IBM COBOL for AIX version 4.1.1.1.
  - You must obtain IBM COBOL for AIX compiler from your IBM vendor. Obtain the installation documentation and review the information on system prerequisites and installation methods. The following installation instructions assume that you have the IBM installation files and installation documentation. Review the information on planning your installation, but use the instructions in this document to carry out the installation. Contact your IBM representative to obtain the software.
  - See <http://www-01.ibm.com/software/awdtools/cobol/aix/>
  - See <http://www-01.ibm.com/software/awdtools/cobol/aix/library/>
- The IBM COBOL compiler uses the system temporary space for some steps. Be sure the space is not full before beginning the compilation.
  - See *Using the IBM COBOL Compiler on IBM AIX, Troubleshooting the IBM COBOL Compiler*.
- Documentation for IBM System Prerequisites
  - Refer to the "System Prerequisites" section in the IBM Installation guide for COBOL for AIX 4.1, before installing and running the software.

## Task 11B-4-1: Installing IBM COBOL for AIX v4.1.1.1

This procedure assumes that you obtained the installation file from your IBM vendor and saved the compressed installation file in a local directory, referred to here as *CBL\_INSTALL*. The compressed installation file includes several filesets. All of the filesets listed must be installed. This table lists the filesets for IBM COBOL for AIX compiler v4.1.1.1, and the locations where they will be installed:

| Fileset Name       | Fileset Description                     | Installation Locations*                                                                                   | Required Fileset Level |
|--------------------|-----------------------------------------|-----------------------------------------------------------------------------------------------------------|------------------------|
| cobol.cmp          | IBM COBOL for AIX compiler              | /usr/lpp/cobol/<br>/usr/lpp/cobol/bin/<br>/usr/lpp/cobol/samples/<br>/usr/lpp/cobol/include/<br>/usr/bin/ | 4.1.1.1                |
| cobol.dbg          | IBM COBOL for AIX debugger              | /usr/lpp/cobol/lib<br>/usr/lib/                                                                           | 4.1.1.1                |
| cobol.lic          | IBM COBOL for AIX license files         | /usr/lpp/cobol/lib/                                                                                       | 4.1.1.0                |
| cobol.license      | IBM COBOL for AIX license               | NONE                                                                                                      | 4.1.1.0                |
| cobol.man          | IBM COBOL for AIX compiler manual pages | /usr/share/man/<br>/usr/lpp/cobol/man/                                                                    | 4.1.1.1                |
| cobol.msg.LANG     | IBM COBOL for AIX compiler messages     | /usr/lpp/cobol/lib/nls/msg/<br>LANG/<br>LANG = [en_US, ja_JP,<br>Ja_JP]                                   | 4.1.1.0                |
| cobol.rte          | IBM COBOL for AIX Runtime               | /usr/lpp/cobol/<br>/usr/lpp/cobol/lib/<br>/usr/lib/<br>/etc/                                              | 4.1.1.0                |
| cobol.rte.msg.LANG | IBM COBOL for AIX runtime messages      | /usr/lpp/cobol/<br>/usr/lpp/cobol/lib/<br>/usr/lib/<br>/etc/                                              | 4.1.1.0                |
| cobol.tools        | IBM COBOL for AIX tools                 | /usr/lpp/cobol/                                                                                           | 4.1.1.1                |

\* If more than one location is listed, the fileset is copied into all the locations.

To extract and install:

1. Go to the location where you saved the compressed installation file:

```
cd CBL_INSTALL
```

2. Uncompress and unpack the downloaded file with this command:

```
zcat cobol.411.aix.GM.tar.Z | tar -xvf
```

Note: The name of the compressed file you downloaded may be different than what is mentioned above.

3. Change directory to *CBL\_INSTALL*/usr/sys/inst.images, and use the *inutoc* command to generate a list of the files in this directory:

```
cd usr/sys/inst.images
inutoc .
```

4. Use the AIX command *installp* to install.

For information on using the options for *installp*, see the IBM COBOL for AIX documentation. For example:

- To install all available filesets to the locations specified in the table at the beginning of this procedure, and write an installation log, use this command:

```
installp -aXYgd <CBL_INSTALL>/usr/sys/inst.images -e <LOG_DIR/logfile_=>
name> all
```

- To install a specific fileset, and write an installation log, use this command:

```
installp -aXYgd <CBL_INSTALL>/usr/sys/inst.images -e <LOG_DIR/logfile_=>
name> <fileset_name>
```

5. Download the required maintenance packs for IBM COBOL 4.1.1.1 from the IBM web site:

- a. Go the IBM Support Fix Central web site: <http://www-933.ibm.com/support/fixcentral/>
- b. Select the Product Group as Rational, Product as COBOL for AIX, Installed Version as 4.1.1.0 and Platform as AIX. Click Continue.
- c. Select the Browse for fixes radio button. Click Continue.
- d. Select the fix pack 4.1.1.1 or higher. Click Continue.
- e. Download the fix pack using one of the download options available.

6. Install the filesets included in the fix pack using the *installp* command as described above.

- You must install all the available filesets for 4.1.1.1.
- For the fileset *cobol.msg.LANG* (where *LANG* = [en\_US, ja\_JP, Ja\_JP] ), choose to install only the filesets relevant to your desired language and location.

---

**Note.** The *LANG* environment variable determines which message catalogs are used. The *en\_US* (English) message catalogs are installed by default. If *LANG* is not defined or is assigned an unsupported locale, *en\_US* message catalogs are used.

---

7. Use the *lslpp* command to check the status of the installed COBOL filesets:

```
lslpp -L cobol*
```

## Task 11B-5: Using the IBM COBOL Compiler on IBM AIX

---

This section discusses:

- Setting Environment Variables for IBM COBOL
- Compiling COBOL on AIX with a PS\_HOME Setup
- Compiling COBOL on AIX with a PS\_APP\_HOME Setup
- Compiling COBOL on AIX with a PS\_CUST\_HOME Setup
- Troubleshooting the IBM COBOL Compiler
- Setting Up the IBM COBOL Runtime
- Removing the IBM COBOL Installation

### Setting Environment Variables for IBM COBOL

Before compiling the IBM COBOL for AIX, or before installing the files on machines where the COBOL will be run, you must specify environment variables as described in this section. This procedure assumes that the installation directory for PeopleSoft PeopleTools is *PS\_HOME*.

To set the environment variables for IBM COBOL for AIX, go to the PeopleSoft PeopleTools installation directory and source the `psconfig.sh` script:

```
cd <PS_HOME>
. ./psconfig.sh
```

This section includes different procedures depending upon how you set up your installation environment.

- *PS\_HOME Setup*

If you installed the PeopleSoft Application software to a *PS\_APP\_HOME* location that is the same as the *PS\_HOME* location where you installed the PeopleSoft PeopleTools software, follow the instructions in the section Compiling COBOL on AIX with a *PS\_HOME* Setup.

- *PS\_APP\_HOME Setup*

If you installed the PeopleSoft Application software to a *PS\_APP\_HOME* location that is different from the *PS\_HOME* location where you installed the PeopleSoft PeopleTools software, follow the instructions in the section Compiling COBOL on AIX with a *PS\_APP\_HOME* Setup.

- *PS\_CUST\_HOME Setup*

For PeopleSoft PeopleTools 8.53 and later, you have the option to place customized COBOL baseline sources into a location referenced by the environment variable *PS\_CUST\_HOME*.

The *PS\_CUST\_HOME* directory structure must replicate that of *PS\_HOME* or *PS\_APP\_HOME*; that is, any COBOL source file that is customized should be placed in the same relative path as was present in the original location. If you set up a *PS\_CUST\_HOME* directory for your customized COBOL source files, follow the instructions in the section Compiling COBOL on AIX with a *PS\_CUST\_HOME* Setup.

### See Also

"Preparing for Installation," Defining Installation Locations.

## Task 11B-5-1: Compiling COBOL on AIX with a PS\_HOME Setup

This section assumes that you have installed the PeopleSoft Application software in the same directory (*PS\_APP\_HOME*) where you installed the PeopleSoft PeopleTools software (*PS\_HOME*), and that you do not have customized COBOL source files in a *PS\_CUST\_HOME* directory. In addition, this procedure assumes that you have set the environment variables as described in the previous section.

This section is only required for those who need to compile the COBOL sources, not for those who only need to run the compiled COBOL.

To compile the COBOL source files:

1. Change the directory to *PS\_HOME/setup*; for example:

```
cd $PS_HOME/setup
```

2. Depending on the character encoding type that your installation uses, set the environment variable *PS\_ENCODING*, as specified in this table:

| Database Encoding | Command                                 |
|-------------------|-----------------------------------------|
| ANSI              | <code>export PS_ENCODING=ansi</code>    |
| Unicode           | <code>export PS_ENCODING=unicode</code> |

Make sure that you are giving the correct value of this environment variable. You will receive errors if the wrong value of this environment variable is specified.

- If your setup includes the file *\$PS\_HOME/setup/unicode.cfg*, indicating that the character encoding for your installation is Unicode, but you set the value of *PS\_ENCODING* to *ansi* with the commands above, you will get the following error

```
pscblibm.mak : ERROR : <PS_HOME>/unicode.cfg EXISTS, but INCOMPATIBLE=>
encoding of $PS_ENCODING was specified, EXITING!!!
```

- If your setup does not have the file *\$PS\_HOME/setup/unicode.cfg*, indicating that the character encoding for your installation is non-Unicode, but you set the value of *PS\_ENCODING* to *unicode*, you will get the following error

```
pscblibm.mak : ERROR : <PS_HOME>/setup/unicode.cfg does not EXIST,=>
but INCOMPATIBLE encoding of $PS_ENCODING was specified, EXITING!!!
```

3. Use this command to compile:

```
./psclibm.mak apps
```

The optional parameter *apps* determines the location of the work area where the compilation takes place. The allowed values and compilation location for PeopleSoft product lines are listed in this table:

| Product Line                       | Apps Parameter | Location                               |
|------------------------------------|----------------|----------------------------------------|
| PeopleSoft PeopleTools             | pt (default)   | <i>PS_HOME</i> /sdk/cobol/psclpt/src   |
| Human Capital Management           | hcm            | <i>PS_HOME</i> /sdk/cobol/psclhrms/src |
| Financials/Supply Chain Management | fscm           | <i>PS_HOME</i> /sdk/cobol/psclfscm/src |

The compiled COBOL programs will be placed under *<PS\_HOME>/CBLBIN\_IBM<X>*.

*<X>* is A for ANSI or U for Unicode.

---

**Note.** If you see the following output during the compilation, you can ignore it:

```
Preprocessing COBOL files ls: 0653-341 The file *.cfg does not exist.
Preprocessing the file PSPBASCH.cbl Can't open input file
```

---

## Task 11B-5-2: Compiling COBOL on AIX with a PS\_APP\_HOME Setup

This section assumes that you have installed the PeopleSoft Application software in a directory (*PS\_APP\_HOME*) which is different than the PeopleSoft PeopleTools software installation directory (*PS\_HOME*) and that you do not have customized COBOL source files in a *PS\_CUST\_HOME* directory. In addition, this procedure assumes that you have set the environment variables as described earlier.

This section is only required for those who need to compile the COBOL sources, not for those who only need to run the compiled COBOL.

To compile the COBOL source files:

1. Ensure that the directory *sdk/cobol/psclapps* is present under *PS\_APP\_HOME* directory for the application you are trying to compile.

For example if the installed PeopleSoft Application is Human Capital Management (*apps* = *hcm*), then the following directory structure should be present and the user must have write access to it:

```
sdk/cobol/psclhcm
```

2. Set the environment variable for *PS\_HOME*, the directory where you installed the PeopleSoft software; for example:

```
PS_HOME = ~/PTcompile; export PS_HOME
```

3. Set the environment variable for *PS\_APP\_HOME*, the directory where you installed the PeopleSoft Application software; for example:

```
PS_APP_HOME = ~/HRcompile; export PS_APP_HOME
```

4. Change the directory to *PS\_HOME/setup*; for example:

```
cd $PS_HOME/setup
```



5. Depending on the character encoding type that your installation uses, set the environment variable `PS_ENCODING`, as specified in this table:

| Database Encoding | Command                                 |
|-------------------|-----------------------------------------|
| ANSI              | <code>export PS_ENCODING=ansi</code>    |
| Unicode           | <code>export PS_ENCODING=unicode</code> |

Make sure that you are giving the correct value of this environment variable. You will receive errors if the wrong value of this environment variable is specified, as follows:

- If your setup includes the file `$PS_HOME/setup/unicode.cfg`, indicating that the character encoding for your installation is Unicode, but you set the value of `PS_ENCODING` to `ansi` with the commands above, you will get the following error:

```
psclibm.mak : ERROR : <PS_HOME>/unicode.cfg EXISTS, but INCOMPATIBLE=>
encoding of $PS_ENCODING was specified, EXITING!!!
```

- If your setup does not have the file `$PS_HOME/setup/unicode.cfg`, indicating that the character encoding for your installation is non-Unicode, but you set the value of `PS_ENCODING` to `unicode`, you will get the following error:

```
psclibm.mak : ERROR : <PS_HOME>/setup/unicode.cfg does not EXIST,=>
but INCOMPATIBLE encoding of $PS_ENCODING was specified, EXITING!!!
```

6. Use this command to compile:

```
./psclibm.mak apps
```

The optional parameter `apps` determines the location of the work area where the compilation takes place. The allowed values and compilation locations are listed in this table:

| Product Line                       | Apps Parameter | Location                                             |
|------------------------------------|----------------|------------------------------------------------------|
| PeopleSoft PeopleTools             | pt (default)   | <code>PS_HOME/sdk/cobol/psclpt/src</code>            |
| Human Capital Management           | hcm            | <code>PS_APP_HOME/<br/>sdk/cobol/psclhrms/src</code> |
| Financials/Supply Chain Management | fscm           | <code>PS_APP_HOME/<br/>sdk/cobol/psclfscm/src</code> |

The PeopleSoft PeopleTools compiled COBOL programs will be placed under `<PS_HOME>/CBLBIN_IBM<X>` and the PeopleSoft Application compiled COBOL programs will be placed under `<PS_APP_HOME>/CBLBIN_IBM<X>`.

`<X>` is A for ANSI or U for Unicode.

### Task 11B-5-3: Compiling COBOL on AIX with a `PS_CUST_HOME` Setup

This section assumes that you have set up a `PS_CUST_HOME` environment variable for customized COBOL source files. Furthermore, it assumes that you have set the environment variables as described earlier.

This section is only required for those who need to compile the COBOL sources, not for those who only need to run the compiled COBOL.

1. Ensure that the directory `sdk/cobol/psclblapps` is present under the `PS_APP_HOME` directory for the application you are trying to compile.

For example if the installed PeopleSoft Application is Human Capital Management (*apps* = *hcm*), then the following directory structure should be present and the user must have write access to it:

```
sdk/cobol/psclblhcm
```

2. Set the environment variable for `PS_HOME`, the directory where you installed the PeopleSoft PeopleTools software; for example:

```
PS_HOME = ~/PTcompile; export PS_HOME
```

3. If `PS_APP_HOME` is different from `PS_HOME`, set the environment variable for `PS_APP_HOME`, the directory where you installed the PeopleSoft Application software; for example:

```
PS_APP_HOME = ~/HRcompile; export PS_APP_HOME
```

4. Set the environment variable for `PS_CUST_HOME`, the directory where you installed the PeopleSoft Application software; for example:

```
PS_CUST_HOME = ~/CUSTcompile; export PS_CUST_HOME
```

5. Change the directory to `PS_HOME/setup`; for example:

```
cd $PS_HOME/setup
```

6. Depending on the character encoding type that your installation uses, set the environment variable `PS_ENCODING`, as specified in this table:

| Database Encoding | Command                                 |
|-------------------|-----------------------------------------|
| ANSI              | <code>export PS_ENCODING=ansi</code>    |
| Unicode           | <code>export PS_ENCODING=unicode</code> |

Make sure that you are giving the correct value of this environment variable. You will receive errors if the wrong value of this environment variable is specified, as follows:

- If your setup includes the file `$PS_HOME/setup/unicode.cfg`, indicating that the character encoding for your installation is Unicode, but you set the value of `PS_ENCODING` to `ansi` with the commands above, you will get the following error:

```
psclblm.mak : ERROR : <PS_HOME>/unicode.cfg EXISTS, but INCOMPATIBLE=>
encoding of $PS_ENCODING was specified, EXITING!!!
```

- If your setup does not have the file `$PS_HOME/setup/unicode.cfg`, indicating that the character encoding for your installation is non-Unicode, but you set the value of `PS_ENCODING` to `unicode`, you will get the following error:

```
psclblm.mak : ERROR : <PS_HOME>/setup/unicode.cfg does not EXIST,=>
but INCOMPATIBLE encoding of $PS_ENCODING was specified, EXITING!!!
```

- Use this command to compile:

```
./psclblm.mak cust
```

The customized PeopleSoft PeopleTools and PeopleSoft Application COBOL programs will be placed under `<PS_CUST_HOME>/CBLBIN_IBM<X>`.

`<X>` is A for ANSI or U for Unicode.

## Task 11B-5-4: Troubleshooting the IBM COBOL Compiler

This section discusses:

- Understanding Troubleshooting for the IBM COBOL Compiler
- Reviewing Screen Output from `psclibm.mak`
- Reviewing `erroribm.lst`
- Reviewing the `LISTOUT.LST` file
- Reviewing `COBOL_PROGRAM.LST` files
- Reviewing temporary space errors

### Understanding Troubleshooting for the IBM COBOL Compiler

You can find the error and list files discussed in this section in the following locations, depending upon your installation setup:

- If `PS_APP_HOME` and `PS_CUST_HOME` are the same as `PS_HOME` or both `PS_APP_HOME` and `PS_CUST_HOME` are undefined, all error and list files mentioned here are placed in directories under `PS_HOME`.
- If `PS_APP_HOME` is different from `PS_HOME`, and you compile PeopleSoft PeopleTools COBOL source files, the error and list files mentioned here are placed in directories under `PS_HOME`.
- If `PS_APP_HOME` is different from `PS_HOME`, and you compile PeopleSoft Application COBOL source files, the error and list files mentioned here are placed in directories under `PS_APP_HOME`.
- If `PS_CUST_HOME` is different from `PS_HOME`, and you compile PeopleSoft Application COBOL source files, the error and list files mentioned here are placed in directories under `PS_CUST_HOME`.

When compiling COBOL programs on AIX using the IBM COBOL compiler, compiler and linker informational messages are reported in the following locations:

- screen output from `psclibm.mak`
- `erroribm.lst`  
`PS_HOME/setup/erroribm.lst`
- `LISTOUT.lst` file  
`<PS_HOME>/sdk/cobol/pscbl<APPS>/src/LISTOUT.lst`  
`<APPS>` is the PeopleSoft product family, such as `hcm`.  
See *Compiling COBOL on AIX with a PS\_HOME Setup*
- `COBOL_PROGRAM.lst`  
`<PS_HOME>/sdk/cobol/pscbl<APPS>/lst/<COBOL_PROGRAM>.lst`

Initially, either review the screen output or the `erroribm.lst` file in `PS_HOME/setup`. The `erroribm.lst` file will contain the names of the programs that failed to compile. You can examine the file `LISTOUT.lst` to find the COBOL program names listed in `erroribm.lst` to review the cause of the failures. Then review the `COBOL_PROGRAM.lst` file to analyze the COBOL error in context of the COBOL source code. After you have corrected the compile or linker errors, you can simply start a complete re-compile.

Depending on the relevancy of the failing compiled modules to your project mission, you can decide to resolve all compile and linker errors or continue without the failed modules.

The programs PTPPSRUN and PTPPSRMT must be compiled correctly. If these programs do not compile correctly, none of the COBOL programs will run. These programs are located at *PS\_HOME*/src/cbl/ibm/unix.

If these programs fail to compile, you will get the following errors:

```
./psclibm.mak : Error : Critical program PTPPSRUN did not compile
./psclibm.mak : Error : This error must be fixed prior to running any⇒
cobol programs...
```

```
./psclibm.mak : Error : Critical program PTPPSRMT did not compile
./psclibm.mak : Error : This error must be fixed prior to running any⇒
cobol programs via RemoteCall
```

Be sure to resolve the errors for these programs before proceeding.

## Reviewing Screen Output from psclibm.mak

The screen output is the first place you should look to determine if there is a compilation or linking error. Errors including the phrase "fail to compile/link" will be displayed at the end of the screen output. For example:

```
./psclibm.mak: Error : The list of file(s) failed to compile/link.
CEPCROLL fail to compile/link
ENPBTRNS fail to compile/link
ENPMMAIN fail to compile/link
GLPJEDT2 fail to compile/link
SFPCRELS fail to compile/link
SFPREVAL fail to compile/link
./psclibm.mak : The list of file(s) that failed to compile/link can be⇒
found at /data1/home/easa/pt854/setup/erroribm.lst
./psclibm.mak : The compilation log is generated at /data1/home/easa⇒
/pt854/sdk/cobol/psclpt/src/LISTOUT.lst
./psclibm.mak : The compile listing of the COBOL programs can be seen at ⇒
/data1/home/easa/pt854/sdk/cobol/psclpt/lst
```

## Reviewing erroribm.lst

The erroribm.lst file is located in the *PS\_HOME*/setup directory, and contains a list of the programs that failed to compile. For example:

```
CEPCROLL fail to compile/link
ENPBTRNS fail to compile/link
ENPMMAIN fail to compile/link
GLPJEDT2 fail to compile/link
SFPCRELS fail to compile/link
SFPREVAL fail to compile/link
```

## Reviewing the LISTOUT.LST file

The LISTOUT.lst file is located in the *<PS\_HOME>/sdk/cobol/pscl<APPS>/src* directory and contains compiler and linker informational, warning and error messages.

For example, the following error is related to program PTPDBTST:

```
exec: /usr/bin/ld -b64 -bpT:0x100000000 -bpD:0x110000000 -bhalt:5 /lib=>
/crt0_64.o -lg -bexport:/usr/lib/libg.exp -o PTPCURND PTPCURND.o -brtl -bE=>
symlist.
exp -lpthreads -ldl -lnsl -L/home/sphilli2/852-803-I1-AIX-ORAU-DEBUG/bin ->
lpcompat_ansi -lpssqlapi_ansi -lpsuser_ansi -lpspetssl -lpsora_ansi ->
lpcobnet_ansi -L/usr/lpp/cobol/lib -L/usr/lpp/SdU/vsam/lib -L/usr/lpp/Sd=>
U/sfs/lib -lcob2s -lsmrtlite -lC128 -lc -lc
unlink: PTPCURND.o
exec: /usr/lpp/cobol/bin/IGYCCOB2 -qtest -qdynam -qaddr(64),flag(w),trunc=>
(bin),arith(extend) -qADDR(64) PTPDBTST.cbl
PP 5724-V62 IBM COBOL for AIX 3.1.0 in progress ...
LineID Message code Library phase message text
          IGYLI0090-W 4 sequence errors were found in this program.
Messages Total Informational Warning Error Severe =>
Terminating
Printed: 1 1
LineID Message code Message text
          IGYSC0205-W Warning message(s) were issued during library phase=>
processing. Refer to the beginning of the listing.
          588 IGYPA3007-S "ZZ000-SQL-ERROR-ROUTINE" was not defined as a
          procedure-name. The statement was discarded.
Messages Total Informational Warning Error Severe =>
Terminating
Printed: 2 1 1
Suppressed: 6 6
End of compilation 1, program PTPDBTST, highest severity: Severe.
Return code 12
PTPDBTST fail to compile/link
```

## Reviewing COBOL\_PROGRAM.LST files

The COBOL\_PROGRAM.lst files are located in `<PS_HOME>/sdk/cobol/pscb<APPS>/lst` directory and contain the compiler output for a specific program.

For example, a portion of the PTPDBTST.lst file contains this compilation error found for program PTPDBTST, where the ZZ000-SQL-ERROR-ROUTINE was not defined:

```
          588 IGYPA3007-S "ZZ000-SQL-ERROR-ROUTINE" was not defined as a=>
          procedure-name. The statement was discarded.
-Messages Total Informational Warning Error Severe =>
Terminating
0Printed: 2 1 1
0Suppressed: 6 6
-* Statistics for COBOL program PTPDBTST:
* Source records = 805
* Data Division statements = 213
* Procedure Division statements = 52
```

## Reviewing temporary space errors

IBM COBOL compiler uses the system temporary space to do some steps of the compilation. Like other UNIX processes, the compiler may give errors when the system temporary space is full.

To avoid or correct this problem, clean up the system temporary space on your machine.

Here is a sample of errors seen during compilation, when the system temporary space (/tmp) was full in a development AIX machine:

```
pscblibm.mak : Compiling EGPPRCTL.cbl ...
IGYDS5247-U   An error occurred while attempting to write a compiler work=>
file, "SYSUT7".
Compiler aborted with code 1247
IGYSI5258-U   Error removing WCode file.: A file or directory in the path=>
name does not exist.
IGYSI5258-U   Error removing WCode file.: A file or directory in the path=>
name does not exist.
IGYSI5259-U   Error closing WCode file.: A file descriptor does not refer=>
to an open file.
IGYSI5258-U   Error removing WCode file.: A file or directory in the path=>
name does not exist.
IGYSI5259-U   Error closing WCode file.: A file descriptor does not refer=>
to an open file.
IGYSI5258-U   Error removing WCode file.: A file or directory in the path=>
name does not exist.
IGYSI5259-U   Error closing WCode file.: A file descriptor does not refer=>
to an open file.
IGYSI5258-U   Error removing WCode file.: A file or directory in the path=>
name does not exist.
IGYSI5259-U   Error closing WCode file.: A file descriptor does not refer=>
to an open file.
```

## Task 11B-5-5: Setting Up the IBM COBOL Runtime

This section discusses:

- Installing the IBM COBOL for AIX Runtime Files
- Setting Environment Variables for a PS\_APP\_HOME or PS\_CUST\_HOME Setup
- Configuring the Application Server Domain
- Configuring the Process Scheduler Domain

### Installing the IBM COBOL for AIX Runtime Files

For those machines that only need to run the compiled COBOL files, you must install the runtime filesets for IBM COBOL for AIX. You do not need to install the compiler. You must also configure the PeopleSoft Application Server and Process Scheduler domains.

This procedure assumes that you have downloaded the runtime filesets to *CBL\_INSTALL*, and have set the environment variables as described earlier.

See Setting Environment Variables for IBM COBOL.

The runtime filesets will be installed into the locations as specified in this table:

| Fileset Name   | Fileset Description                                                       | Installation Locations                                       | Fileset Level Required |
|----------------|---------------------------------------------------------------------------|--------------------------------------------------------------|------------------------|
| cobol.rte      | IBM COBOL for AIX runtime libraries                                       | /usr/lpp/cobol/<br>/usr/lpp/cobol/lib/<br>/usr/lib/<br>/etc/ | 4.1.1.0                |
| cobol.msg.LANG | IBM COBOL for AIX runtime messages<br><i>LANG</i> = [en_US, ja_JP, Ja_JP] | /usr/lib/nls/msg/ <i>LANG</i>                                | 4.1.1.0                |

To install the runtime filesets:

1. Use the AIX command `installp` to install these filesets. For example:

```
installp -aYg -d CBL_INSTALL/usr/sys/inst.images cobol.rte cobol.msg.en_⇒
US
```

2. Download the required maintenance packs for IBM COBOL 4.1.1.1 from the IBM support web site.  
<http://www-933.ibm.com/support/fixcentral/>
3. Install the filesets included in the maintenance packs using the `installp` command as described above.

## Setting Environment Variables for a PS\_APP\_HOME or PS\_CUST\_HOME Setup

This section applies to those installations in which:

- You have several Application Server or Process Scheduler domains.
- Each of those domains is going to be associated with a particular *PS\_APP\_HOME* or *PS\_CUST\_HOME* directory.

In this case it is a good idea to define *PS\_APP\_HOME* or *PS\_CUST\_HOME* in *PS\_HOME/psconfig.sh*. For example, edit *psconfig.sh* to add one of these lines:

```
PS_APP_HOME="/home/psft/HRcompile"; export PS_APP_HOME
PS_CUST_HOME="/home/psft/CUSTcompile"; export PS_CUST_HOME
```

After making this change, you must source the *PS\_HOME/psconfig.sh* file again.

This way you would not need to add the *PS\_APP\_HOME* or *PS\_CUST\_HOME* environment variable through the "Edit environment variable" Application Server and Process Scheduler administration menus in PSADMIN each time you create a new domain.

## Configuring the Application Server Domain

This section assumes that you have created an Application Server domain, as described in the chapter "Configuring the Application Server on UNIX." The configuration and log files for application server domains reside in a directory referred to as *PS\_CFG\_HOME*.

See the information on working with *PS\_CFG\_HOME* in the *PeopleTools: System and Server Administration* product documentation.

---

**Note.** You must create a new domain to configure the environment for running IBM COBOLs. You will not be able to reuse an existing domain for the same.

---

To create and configure the Application Server domain:

1. Go to the *PS\_HOME/appserv* directory and run `psadmin`.
2. When the menu appears, specify *1* for Application Server and press ENTER.
3. Enter *2* for Create a Domain, and press ENTER.
4. Specify the domain name. For example:

```
Please enter name of domain to create : HCM92
```

---

**Note.** If you have already set the environment variables *PS\_APP\_HOME* and/or *PS\_CUST\_HOME*, as explained in the section Setting Environment Variables for a *PS\_APP\_HOME* or *PS\_CUST\_HOME* Setup, you can skip the steps 5 through 10.

---

5. On the Quick-configure menu, select *16*, Edit environment settings.
6. If *PS\_APP\_HOME* is different from *PS\_HOME*, carry out steps a and b below.

---

**Note.** If *PS\_APP\_HOME* is the same as *PS\_HOME*, skip these two steps and continue with step 7.

---

- a. On the PeopleSoft Domain Environment Settings, select *2* to add environment variable.
- b. Enter *PS\_APP\_HOME* as the name of the environment variable, and installation directory where you installed your PeopleSoft Application software as the value of the environment variable. For example:

```
Enter name of environment variable: PS_APP_HOME
Enter value: /home/psft/HRcompile
```

You will see an asterisk (\*) in front of the modified environment variables, because these variables have not been saved.

7. If your *PS\_CUST\_HOME* is defined and is different from *PS\_HOME*, carry out the following two steps:

---

**Note.** If *PS\_CUST\_HOME* is the same as *PS\_HOME*, skip these two steps and continue with step 8.

---

- a. On the PeopleSoft Domain Environment Settings, select *2* to add environment variable.
- b. Enter *PS\_CUST\_HOME* as the name of the environment variable, and the installation directory where you installed the customized COBOL files as the value of the environment variable.

For example:

```
Enter name of environment variable: PS_CUST_HOME
Enter value: /home/psft/CUSTcompile
```

You will see an asterisk in front of the *PS\_APP\_HOME* and *PS\_CUST\_HOME* environment variables, indicating that these variables have not been saved.

8. Specify *6* to save the environment variables.
9. Press ENTER to continue at the following message:

```
Your changes have been saved.
```

```
Please be aware these changes will not take effect until you complete=>
```



the domain configuration process.  
Press Enter to continue...

10. Enter *q* for return to the previous menu.
11. On the Quick-configure menu, enter *15*, for Custom configuration.
12. Answer *n* (no) when asked if you want to change the values, until you see the section Remote Call.

```
Values for config section - RemoteCall
COBOL Platform=
RCCBL Redirect=0
RCCBL PRDBIN=%PS_HOME%\cblbin%PS_COBOLTYPE%
Do you want to change any values (y/n/q)? [n]: y
```

Enter *y* (yes) to make a change, as shown in this example.

13. Enter *IBM* as the COBOL platform and ignore the remaining options.

```
COBOL Platform [] : IBM
```

14. Answer *n* (no) when asked if you want to change any of the remaining sections.
15. Enter *1* to boot the domain.
16. Enter *1* for Boot (Serial Boot), or *2* for Parallel Boot.

## Configuring the Process Scheduler Domain

To create and configure the Process Scheduler domain:

---

**Note.** You must create a new domain to configure the environment for running IBM COBOLs. You will not be able to reuse an existing domain for the same.

---

1. Go to the *PS\_HOME*/appserv directory and run psadmin.
2. When the menu appears, specify *2* for Process Scheduler and press ENTER.
3. Enter *2* for Create a Domain.
4. Specify the domain name. For example:

```
Please enter name of domain to create : HCM92
```

---

**Note.** Domain names are case-sensitive and must be eight characters or less.

---

**Note.** If you have already set the environment variables *PS\_APP\_HOME* and/or *PS\_CUST\_HOME*, as explained in the section Setting Environment Variables for a *PS\_APP\_HOME* or *PS\_CUST\_HOME* Setup, you can skip the steps 5 through 10.

---

5. On the Quick-configure menu, select *7*, Edit environment settings.
6. If *PS\_APP\_HOME* is different from *PS\_HOME*, carry out steps a and b below.

---

**Note.** If *PS\_APP\_HOME* is the same as *PS\_HOME*, skip these two steps and continue with step 7.

---

- a. On the PeopleSoft Domain Environment Settings, select *2* to add environment variable.
- b. Enter *PS\_APP\_HOME* as the name of the environment variable, and the installation directory where you installed your PeopleSoft Application software as the value of the environment variable.

For example:

```
Enter name of environment variable: PS_APP_HOME
Enter value: /home/psft/HRcompile
```

7. If your *PS\_CUST\_HOME* is different from *PS\_HOME*, carry out the following two steps.

---

**Note.** If *PS\_CUST\_HOME* is the same as *PS\_HOME*, skip these two steps and continue with step 8.

---

- a. On the PeopleSoft Domain Environment Settings, select 2 to add an environment variable.
- b. Enter *PS\_CUST\_HOME* as the name of the environment variable, and the installation directory where you installed your PeopleSoft Application software as the value of the environment variable.

For example:

```
Enter name of environment variable: PS_CUST_HOME
Enter value: /home/psft/CUSTcompile
```

8. Enter 6 to save the environment variables.
9. Press ENTER to continue at the following message:

```
Your changes have been saved.
Please be aware these changes will not take effect until you complete⇒
the domain configuration process.
Press Enter to continue...
```

10. Enter *q* to return to the previous menu.
11. On the Quick-configure menu, enter 6, for Custom configuration.
12. Answer *n* (no) when asked if you want to change the values, until you see the section Remote Call.

```
Values for config section - RemoteCall
COBOL Platform=
RCCBL Redirect=0
RCCBL PRDBIN=%PS_HOME%\cblbin%PS_COBOLTYPE%
Do you want to change any values (y/n/q)? [n]: y
```

Enter *y* (yes) to make a change, as shown in this example.

13. Enter *IBM* as the COBOL Platform and ignore the remaining options.

```
COBOL Platform []: IBM
```

14. Answer *n* (no) when asked if you want to change any of the remaining sections.
15. Enter *l* to boot the domain.

## Task 11B-5-6: Removing the IBM COBOL Installation

Keep the following information in mind before removing the IBM COBOL compiler on IBM AIX:

- You must have root user access to uninstall this product.
- Some filesets may not be uninstalled if they are required by other installed products.
- As uninstalling dependent packages automatically may introduce problems, it is recommended that you preview uninstallation to ensure that all dependent filesets are no longer required.

See the IBM COBOL compiler documentation for more information.

To remove the IBM COBOL compiler:

## 1. Run the following command:

```
installp -u cobol*
```

Here are typical responses:

```
$ installp -u cobol*
```

```
+-----+----->
-----+
                Pre-deinstall Verification...
+-----+----->
-----+
Verifying selections...done
Verifying requisites...done
Results...
WARNINGS
-----
    Problems described in this section are not likely to be the source of=>
any
immediate or serious failures, but further actions may be necessary or
desired.
Not Installed
-----

    No software could be found on the system that could be deinstalled=>
for the
following requests:
    cobol.msg.Ja_JP
    cobol.msg.ja_JP
    (The fileset may not be currently installed, or you may have made a
    typographical error.)
    << End of Warning Section >>
SUCSESSES
-----
    Filesets listed in this section passed pre-deinstall verification
and will be removed.
Selected Filesets
-----
    cobol.cmp 4.1.1.0                # IBM COBOL for AIX=>
Compiler
    cobol.dbg 4.1.1.0                # IBM COBOL for AIX=>
Debugger
    cobol.lic 4.1.1.0                # COBOL for AIX Licence=>
Files
    cobol.license 4.1.1.0            # COBOL for AIX License=>
Agreem...
    cobol.man 4.1.1.0                # IBM COBOL Set for AIX=>
Man Pages
    cobol.msg.en_US 4.1.1.0          # IBM COBOL for AIX=>
Runtime Me...
    cobol.rte 4.1.1.0                # IBM COBOL for AIX=>
Runtime
    << End of Success Section >>
```

```

FILESET STATISTICS
-----
    9 Selected to be deinstalled, of which:
      7 Passed pre-deinstall verification
      2 FAILED pre-deinstall verification
-----
    7 Total to be deinstalled
+----->
-----+
                                Deinstalling Software...
+----->
-----+
installp: DEINSTALLING software for:
          cobol.lic 4.1.1.0
Filesets processed: 1 of 7 (Total time: 0 secs).
installp: DEINSTALLING software for:
          cobol.license 4.1.1.0
Filesets processed: 2 of 7 (Total time: 0 secs).
installp: DEINSTALLING software for:
          cobol.dbg 4.1.1.0
Filesets processed: 3 of 7 (Total time: 1 secs).
installp: DEINSTALLING software for:
          cobol.man 4.1.1.0
Filesets processed:
    4 of 7 (Total time: 1 secs).
installp: DEINSTALLING software for:
          cobol.msg.en_US 4.1.1.0
Filesets processed: 5 of 7 (Total time: 2 secs).
installp: DEINSTALLING software for:
          cobol.cmp 4.1.1.0
Filesets processed: 6 of 7 (Total time: 3 secs).
installp: DEINSTALLING software for:
          cobol.rte 4.1.1.0
Finished processing all filesets. (Total time: 5 secs).
+----->
-----+
                                Summaries:
+----->
-----+
Pre-installation Failure/Warning Summary
-----
Name                               Level                               Pre-installation Failure=>
/Warning
----->
-----
cobol.msg.Ja_JP                     Nothing by this name to=>
  deinstall
cobol.msg.ja_JP                     Nothing by this name to=>
  deinstall
Installation Summary
-----

```

| Name<br>Result             | Level   | Part | Event     | ⇒ |
|----------------------------|---------|------|-----------|---|
| ----->                     |         |      |           |   |
| cobol.lic<br>SUCCESS       | 4.1.1.0 | USR  | DEINSTALL | ⇒ |
| cobol.license<br>SUCCESS   | 4.1.1.0 | USR  | DEINSTALL | ⇒ |
| cobol.dbg<br>SUCCESS       | 4.1.1.0 | USR  | DEINSTALL | ⇒ |
| cobol.man<br>SUCCESS       | 4.1.1.0 | USR  | DEINSTALL | ⇒ |
| cobol.msg.en_US<br>SUCCESS | 4.1.1.0 | USR  | DEINSTALL | ⇒ |
| cobol.cmp<br>SUCCESS       | 4.1.1.0 | ROOT | DEINSTALL | ⇒ |
| cobol.cmp<br>SUCCESS       | 4.1.1.0 | USR  | DEINSTALL | ⇒ |
| cobol.rte<br>SUCCESS       | 4.1.1.0 | USR  | DEINSTALL | ⇒ |

2. To remove any currently unused modules in kernel and library memory, enter the following on the command line:

```
slibclean
```



## Chapter 12

# Installing PeopleSoft Change Assistant

This chapter discusses:

- Understanding PeopleSoft Change Assistant
- Removing or Upgrading PeopleSoft Change Assistant Installations
- Installing PeopleSoft Change Assistant in GUI Mode
- Installing PeopleSoft Change Assistant in Silent Mode
- Configuring and Using PeopleSoft Change Assistant
- Validating Change Assistant Settings

## Understanding PeopleSoft Change Assistant

---

Oracle's PeopleSoft Change Assistant is a standalone tool, provided with PeopleSoft PeopleTools, that enables you to assemble and organize the steps necessary to apply patches and fixes for maintenance updates as well as perform PeopleSoft upgrades. You use different modes of PeopleSoft Change Assistant to carry out maintenance both for PeopleSoft applications using the PeopleSoft Update Manager, and those using the classic patching method. PeopleSoft Change Assistant is a Java-based tool that runs only on Microsoft Windows-based operating systems.

For the current PeopleSoft PeopleTools release, the PeopleSoft Change Assistant installation includes the following features:

- You can install multiple instances of PeopleSoft Change Assistant from the current release on one physical machine.

---

**Note.** You cannot run more than one instance at a time. That is, you cannot run multiple instances in parallel.

---

- You must remove installations of PeopleSoft Change Assistant from PeopleSoft PeopleTools 8.55 or earlier before installing from the current release. PeopleSoft Change Assistant from PeopleSoft PeopleTools 8.56 cannot co-exist with that from earlier releases.
- You must install each PeopleSoft Change Assistant instance in a separate installation location.
- You can remove or upgrade each PeopleSoft Change Assistant instance separately.
- When you remove an installation instance, you have the option to save the existing configuration information in a group of files gathered in a zip archive. You can configure Change Assistant at a later time by importing the zip file.

For more information on using PeopleSoft Change Assistant for updates and for software upgrades, see the PeopleSoft product documentation.

## See Also

*PeopleTools: Change Assistant and Update Manager*

*PeopleTools: Application Designer Lifecycle Management Guide*

"Using the PeopleSoft Installer," Verifying Necessary Files for Installation on Windows

## Task 12-1: Removing or Upgrading PeopleSoft Change Assistant Installations

---

This section discusses:

- Removing PeopleSoft Change Assistant Installations from Previous Releases
- Removing PeopleSoft Change Assistant Instances in the Current Release
- Upgrading PeopleSoft Change Assistant Instances

### Task 12-1-1: Removing PeopleSoft Change Assistant Installations from Previous Releases

If there is a PeopleSoft Change Assistant installation from PeopleSoft PeopleTools 8.54 or earlier release present when you begin the installation, the installer instructs you to remove it, and then exits. You must remove the previous installation and then run the installer for the current release again.

---

**Note.** When using silent mode installation, however, installations from PeopleSoft PeopleTools 8.54 or earlier are removed by the installer.

See the section *Installing PeopleSoft Change Assistant in Silent Mode*.

---

Use one of the following methods to remove PeopleSoft Change Assistant from a previous release:

- Use the Microsoft Windows function for adding or removing a program. For example:
  - Select Microsoft Windows Control Panel, Programs and Features, Uninstall or change a program.
  - Highlight Change Assistant in the list of programs and select Uninstall.
- Run the PeopleSoft Change Assistant installer from the previous release in *PS\_HOME/setup/PsCA*.

---

**Note.** The installer name for the current release is *installCA.exe*. If you have an older installation, the installer may be named *setup.exe*.

---

The setup utility detects the existing installation and allows you to remove it.

### Task 12-1-2: Removing PeopleSoft Change Assistant Instances in the Current Release

If there is a PeopleSoft Change Assistant installation from the current PeopleSoft PeopleTools release present when you begin the installation, the installer gives you the option to remove or upgrade it. To use the installer to remove the installation:


1. From the *PS\_HOME\setup\PsCA* directory, run *installCA.exe*.



If there is an existing installation of PeopleSoft Change Assistant, the Existing Installed Instances Detected window appears with a list of the instances present.


2. Select the option Maintain or update the instance of this application selected below.

Highlight the instance that you want to remove. In this example, Change Assistant 3 is highlighted. Click Next.

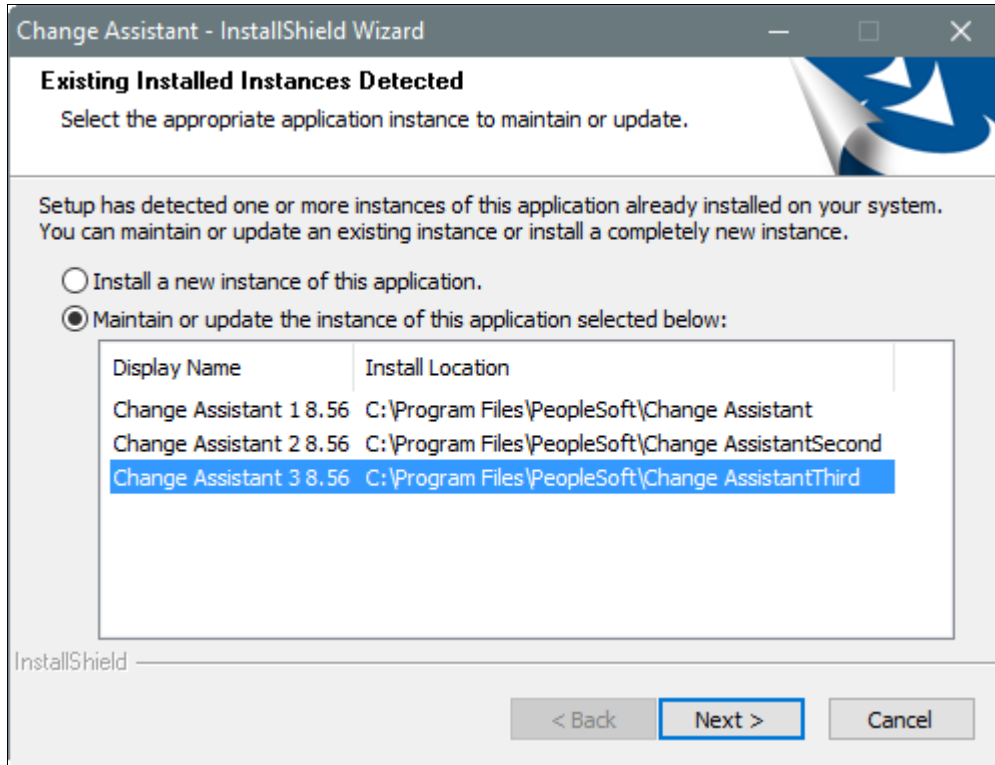

Existing Installed Instances Detected window

3. Select the option Uninstall Selected Instance, as shown in this example, and click Next.

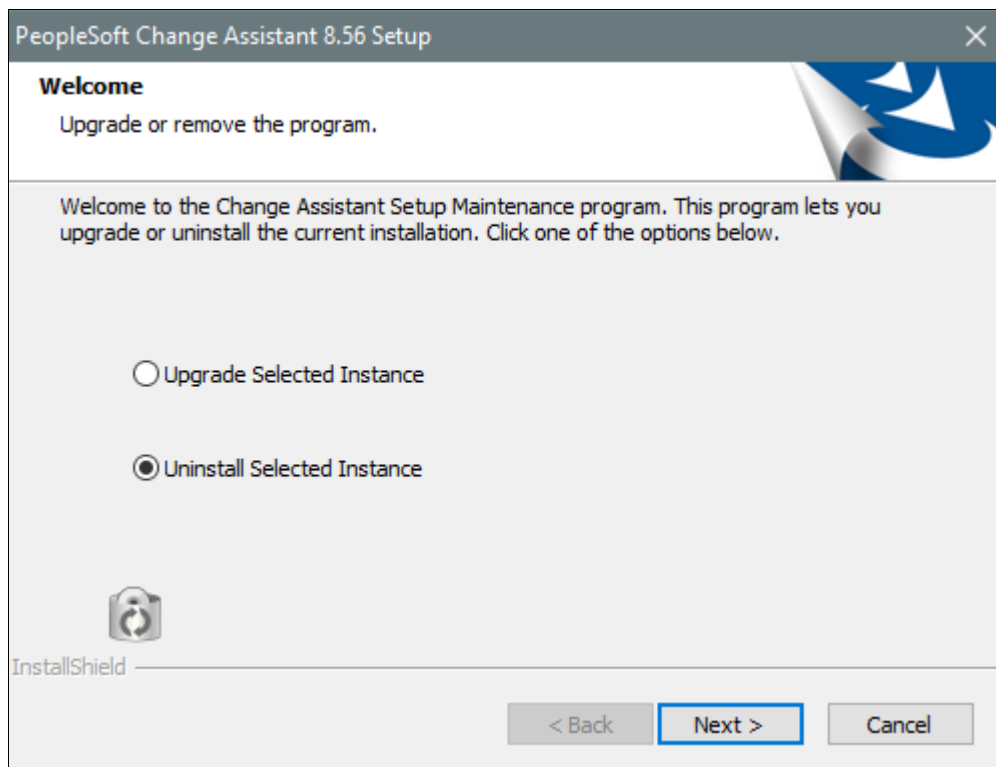


Upgrade or remove the program window

- On the Setup Type window, select Retain existing configuration, as shown in this example, if you want to save a file with the existing Change Assistant configuration.

---

**Note.** If there is no configuration information available, you see an error message.

---

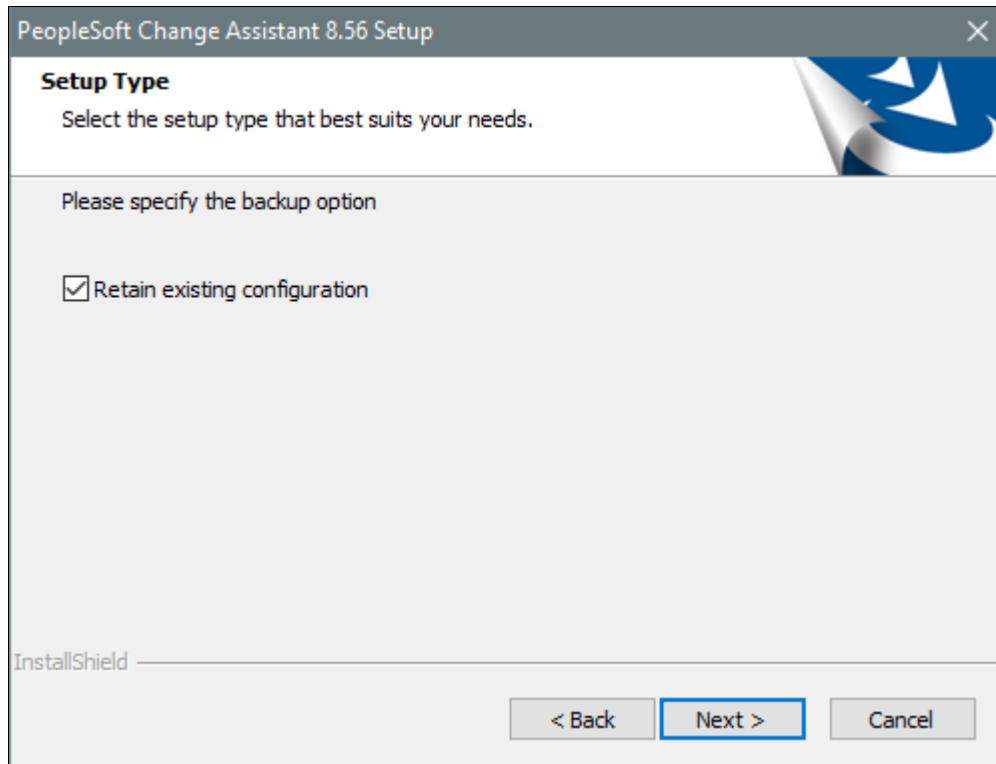

Setup Type window

- Click Next.


If you selected the option to retain the existing configuration, you see a message that gives the name of the backup log file, such as `backupLogUninstall.log`, and the installation location where you can find it, for example `C:\Program Files\PeopleSoft\Change AssistantThird`. The log file is a text file that includes the name and location of the configuration zip file.

The process also saves a zip file, `changeassistantcfgbak.zip`, in the same directory. The zip file includes several XML files with configuration information. Click OK to close the message box.

You see another message asking if you want to proceed with removing the instance and saving the existing configuration. Click OK to continue.

See *PeopleTools: Change Assistant and Update Manager*, "Exporting and Importing Change Assistant Settings."

- When the removal process is complete, click Finish on the window showing a completion message, as shown in this example.

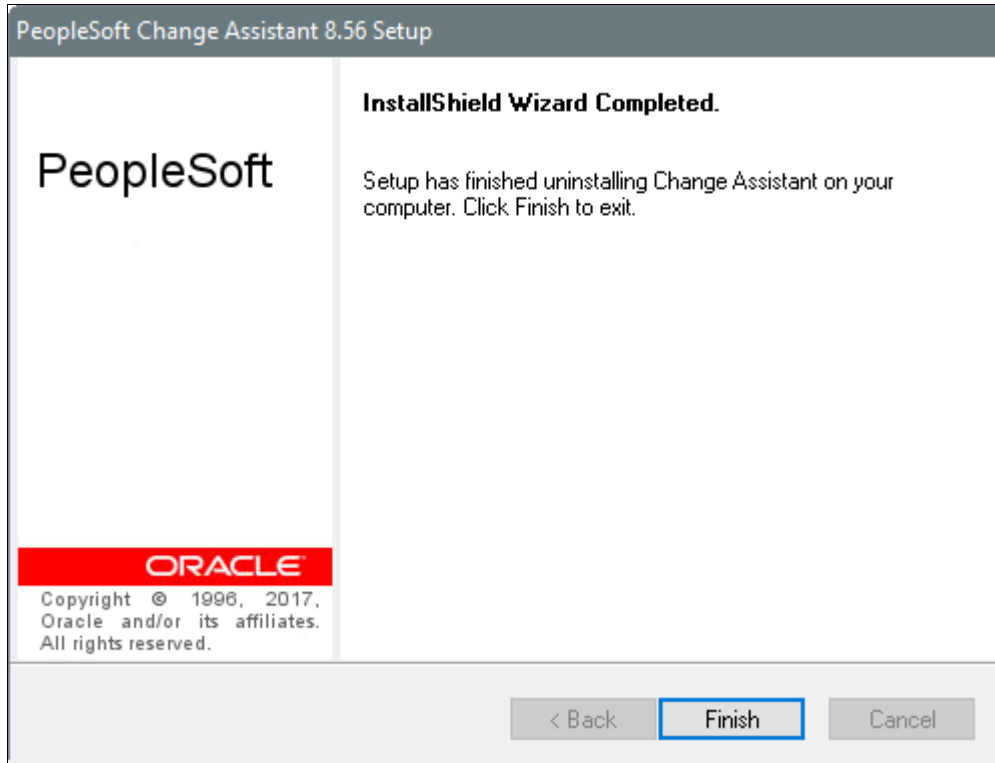

InstallShield Wizard Completed window

- Install the current release.

See [Installing PeopleSoft Change Assistant in GUI Mode](#).

See [Installing PeopleSoft Change Assistant in Silent Mode](#).

You can also use one of the following methods to remove an installation from the current release:

- Go to the Microsoft Window Start menu, locate the PeopleSoft Change Assistant instance, such as PeopleSoft Change Assistant 8.56 1, and select Uninstall CA.
- Go to the installation location, for example `C:\Program Files\PeopleSoft\Change Assistant`, and run `uninstall.bat`.
- Select Microsoft Windows Control Panel, Programs and Features, Uninstall or change a program. Highlight Change Assistant in the list of programs and select Uninstall.

### Task 12-1-3: Upgrading PeopleSoft Change Assistant Instances


If there is a PeopleSoft Change Assistant installation from the current PeopleSoft PeopleTools release present when you begin the installation, the installer gives you the option to remove or upgrade it. To use the installer to upgrade the installation:

- From the `PS_HOME\setup\PSCA` directory, run `installCA.exe`.

If there is an existing installation of PeopleSoft Change Assistant, the Existing Installed Instances Detected window appears with a list of the instances present.


- 2. Select the option Maintain or update the instance of this application selected below.

Highlight the instance that you want to upgrade. In this example, Change Assistant 2 is highlighted. Click Next.

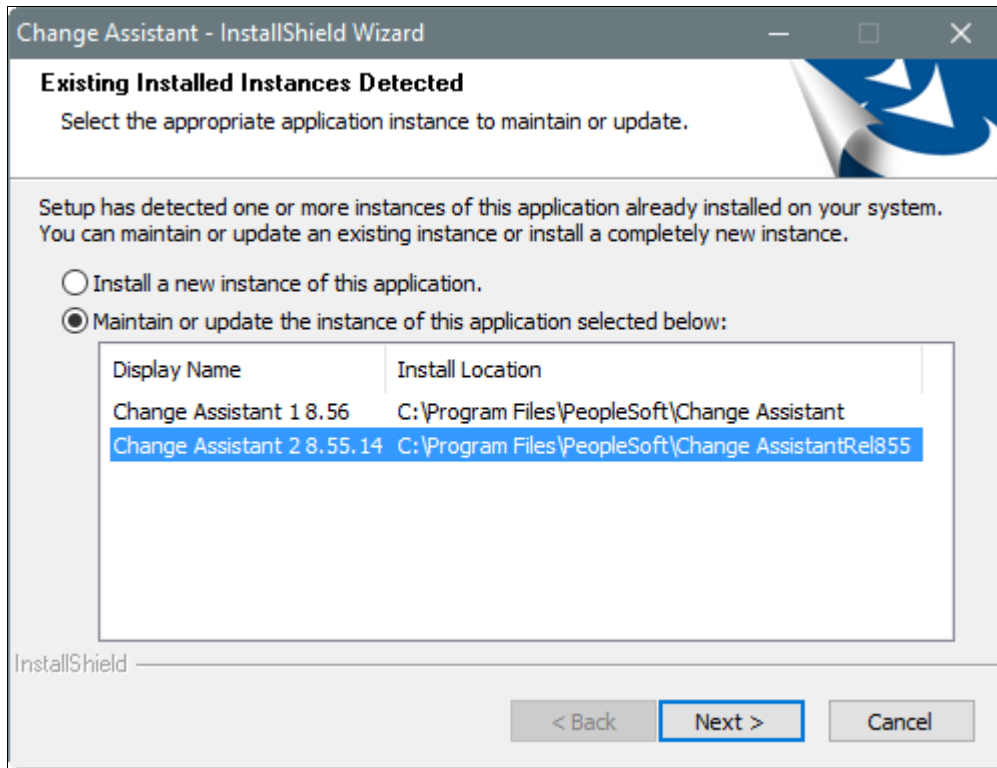

Existing Installed Instances Detected window


3. Select the option Upgrade Selected Instance, as shown in this example, and click Next.

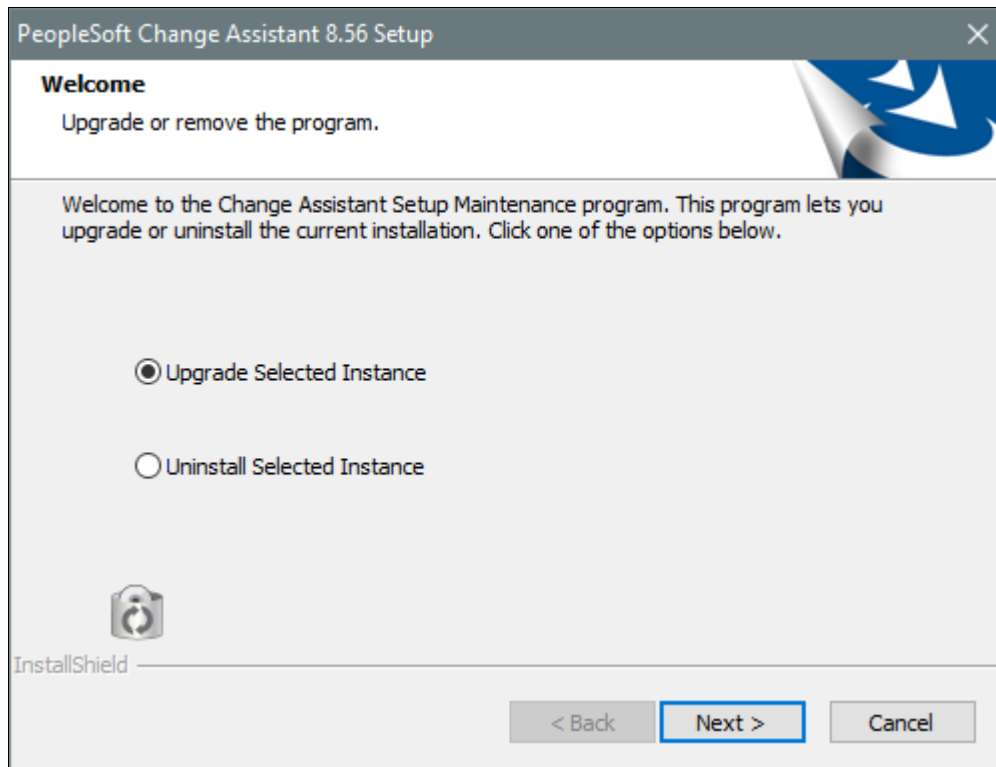

Upgrade or remove the program window

- On the Setup Type window, select Retain existing configuration, as shown in this example, if you want to save a file with the existing Change Assistant configuration.

When you select the option to retain the configuration for an instance that does not include a configuration zip file, the installer creates one. If you are upgrading an instance that does include a configuration file, the installer deletes the previous configuration zip file and creates a new one.

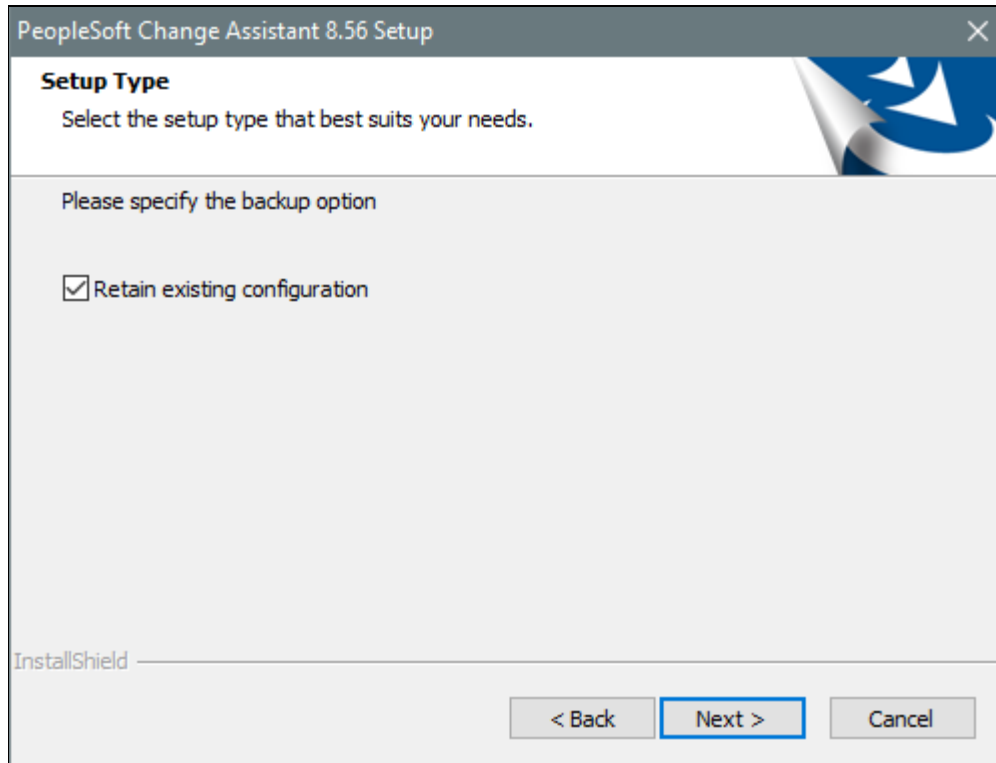

Setup Type window

- Click Next.


If you selected the option to retain the existing configuration, you see a message that gives the name of the backup log file, such as backupLogInstall.log, and the installation location where you can find it, for example C:\Program Files\PeopleSoft\Change Assistant3. The log file is a text file that includes the name and location of the configuration zip file.

The process also saves a zip file, changeassistantcfbak.zip, in the same directory. The zip file includes several XML files with configuration information. Click OK to close the message box.

You see another message asking if you want to proceed with upgrading and saving the existing configuration. Click OK to continue.

See *PeopleTools: Change Assistant and Update Manager*, "Exporting and Importing Change Assistant Settings."

- When the upgrade process is complete, select the option Launch Change Assistant if you want to start Change Assistant when you exit the installer, and then click Finish, as shown in this example.

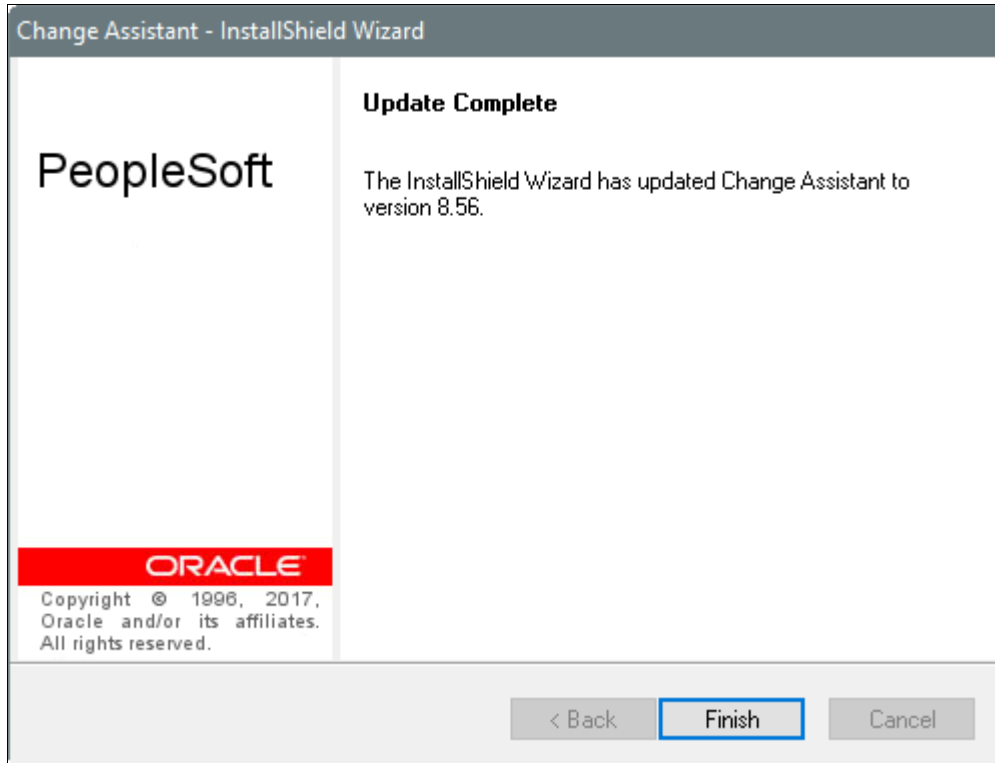

Change Assistant Update Complete window

## **Task 12-2: Installing PeopleSoft Change Assistant in GUI Mode**

A Microsoft Windows-based operating system is required to use PeopleSoft Change Assistant. This section gives the instructions for the GUI installation. For the silent-mode installation, see *Installing PeopleSoft Change Assistant in Silent Mode*.

If you installed PeopleSoft PeopleTools on a UNIX or Linux computer, you can copy `installCA.exe` to a Microsoft Windows machine to install PeopleSoft Change Assistant.

To install PeopleSoft Change Assistant:

- From the `PS_HOME\setup\PSCA` directory, run `installCA.exe`.

If there is an existing installation from a previous release, you see a message saying you must remove it. Click OK to close the message box, use one of the methods previously discussed, and then re-start the installation.

See *Removing PeopleSoft Change Assistant Installations from Previous Releases*.




2. If there is an existing installation from the current release, the Existing Installed Instances Detected window appears with a list of the instances detected and their installation locations, as shown in the following example.

The instance display names are numbered sequentially — Change Assistant 1, Change Assistant 2, and so on. If there is no PeopleSoft Change Assistant installation present, this window does not appear.

**Note.** If you want to remove an installation from the current release using the option Maintain or update the instance of this application selected below, see the previous section.


See Removing PeopleSoft Change Assistant Instances in the Current Release.

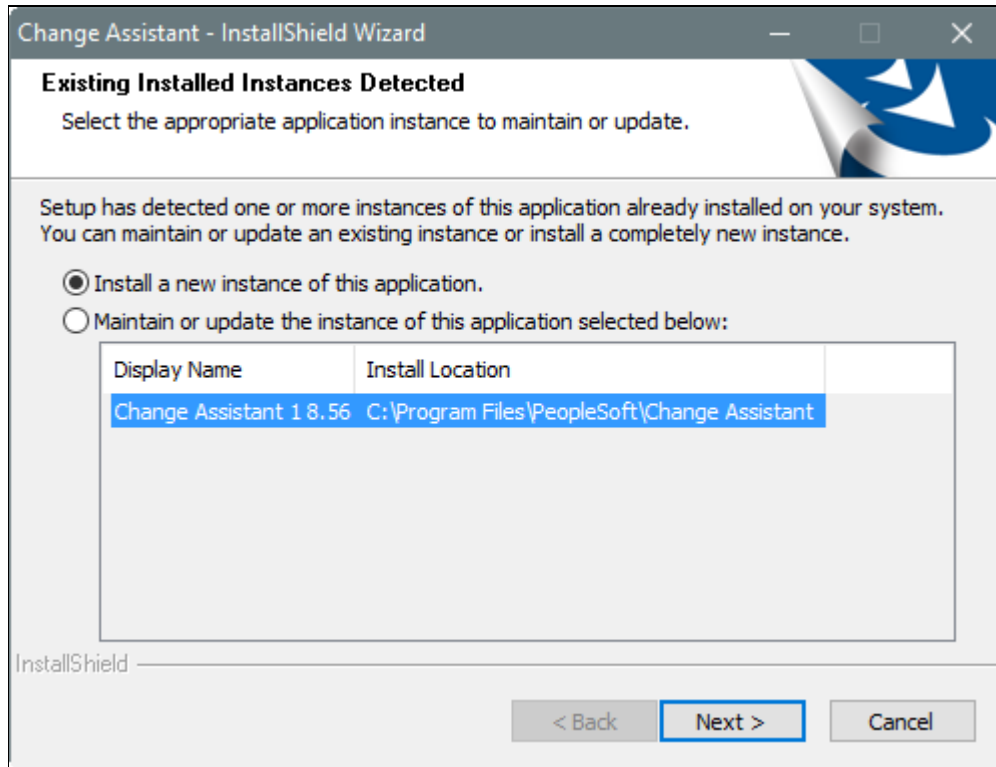

Existing Installed Instances Detected window


3. Select the option Install a new instance of this application and click Next.

The Welcome window appears, as in this example. Click Next.

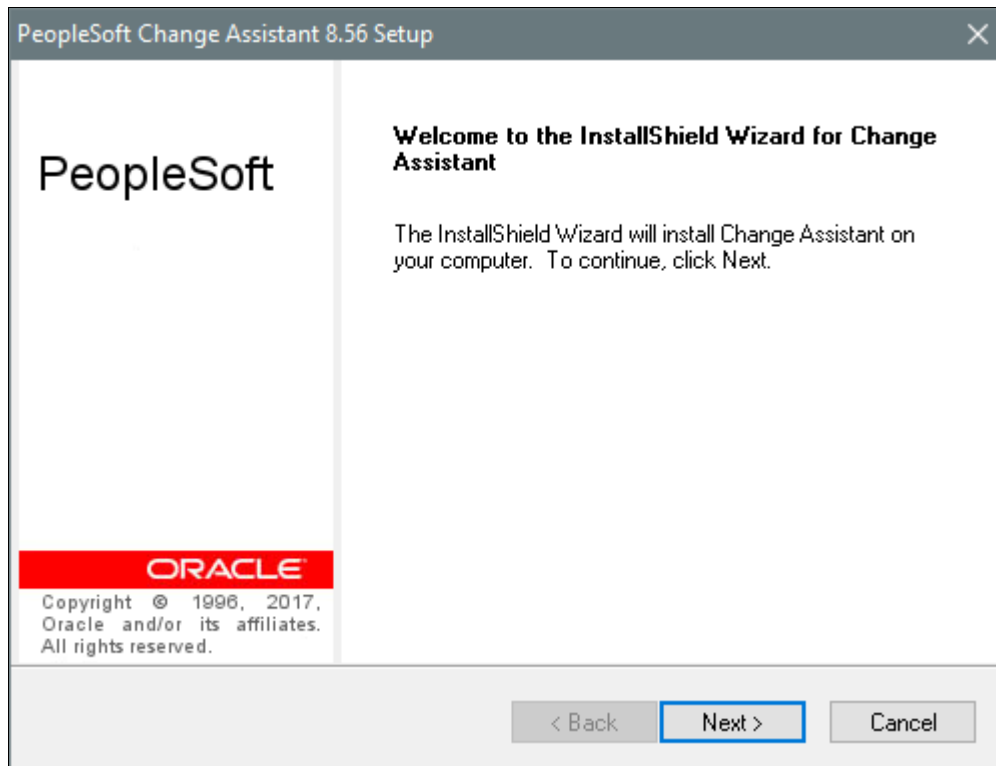

PeopleSoft Change Assistant Setup Welcome window

4. Accept the default Destination Folder or click the Browse button to specify another Destination Folder. The default destination folder is C:\Program Files\PeopleSoft\Change Assistant, as shown in this example.

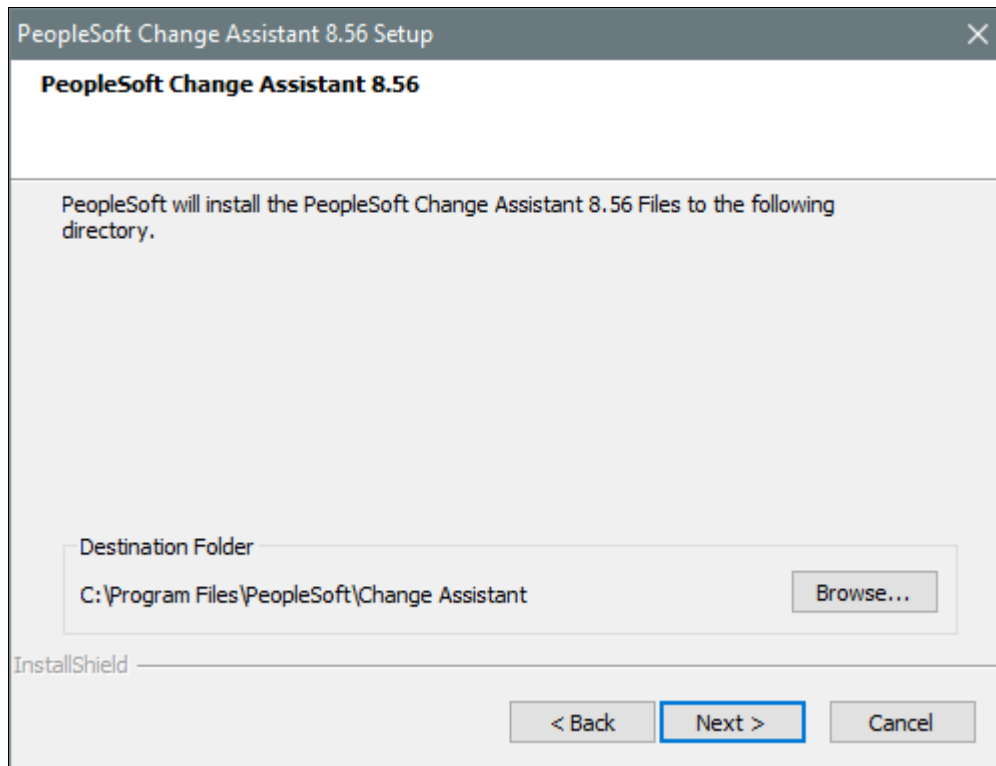

PeopleSoft Change Assistant Setup Destination Folder window

---

**Note.** If there are existing instances present, you must install each instance to a different directory. If you click Next without changing the default directory, you see a message telling you to change the directory or stop and re-run the setup in maintenance mode to upgrade the instance.

---


5. If the installer detects an existing installation in the destination folder that you specified, you see a message telling you to change the installation location, or re-run the installation in upgrade mode.

Click OK to exit the message, and select one of these methods:

- Click Back to return to the previous window and change the destination folder.
- Click Cancel to exit the installation. Run the installation again and select the option to upgrade.

## 6. Select Next.


The Start Copying Files screen appears.

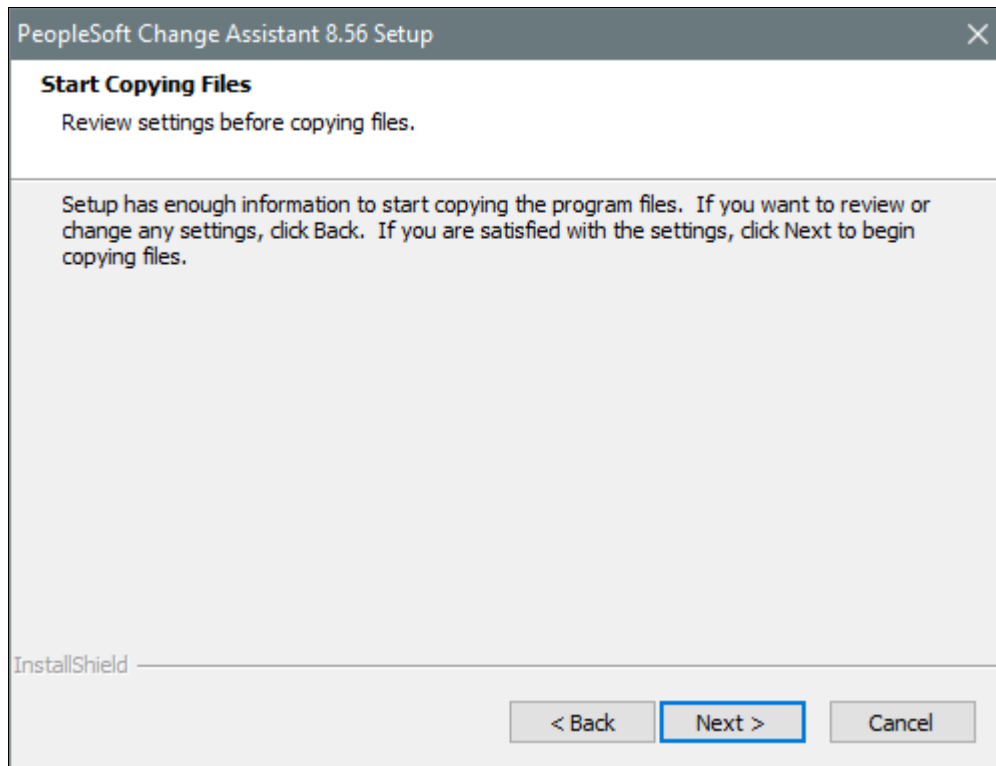

PeopleSoft Change Assistant Setup Start Copying Files window


- 7. Click Back to review or change any settings.

If you are satisfied with your settings, click Next to begin copying files. PeopleSoft Change Assistant copies files to the designated directory.

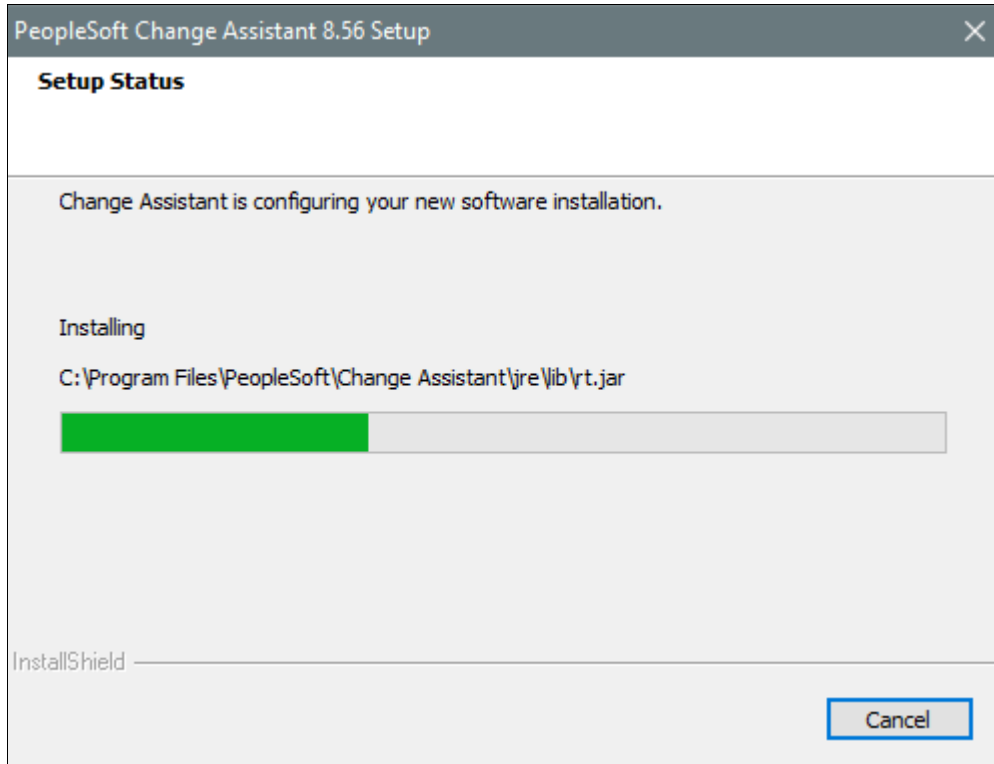

PeopleSoft Change Assistant Setup progress indicator window

8. Click Finish to complete the installation process at the window with the text "Setup has finished installing Change Assistant on your computer."

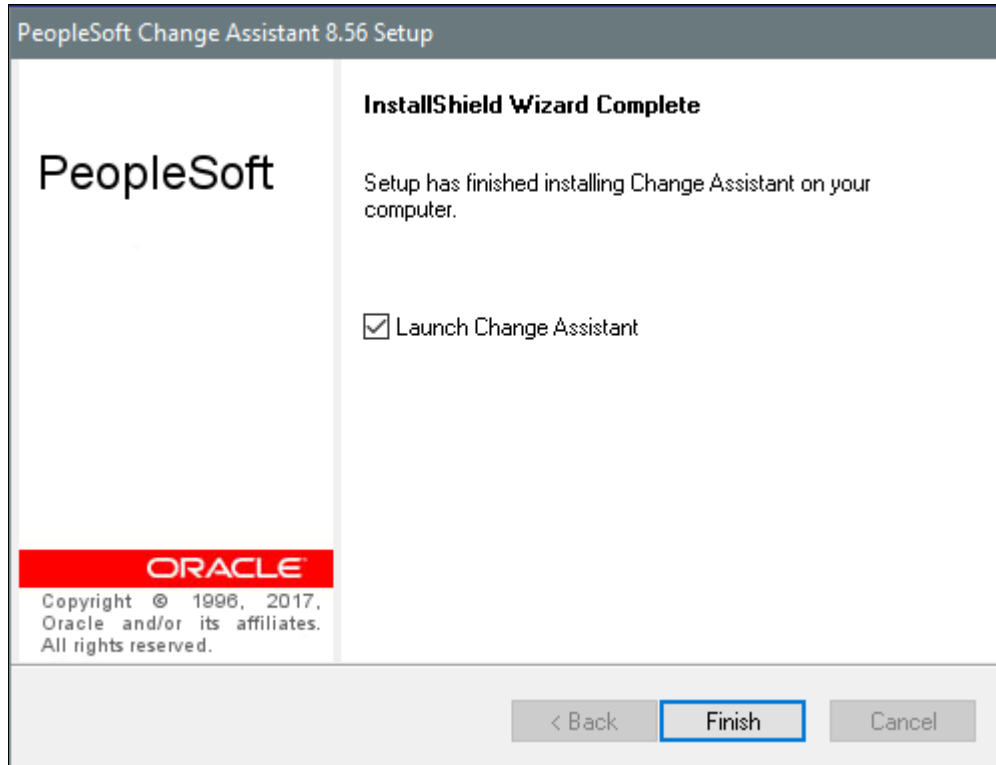

InstallShield Wizard Complete window

9. Reboot your machine after the installation process is complete.
10. To start PeopleSoft Change Assistant, select Start, Programs, PeopleSoft Change Assistant 8.56, Change Assistant.

On Microsoft Windows 8 or 2012 R2, access the Apps screen and navigate to PeopleSoft Change Assistant 8.56, Change Assistant.


---

**Note.** If you are running on a Microsoft Windows operating system with User Account Control (UAC), such as Microsoft Windows 7, you must have administrative privileges to run Change Assistant. Right-click `changeassistant.exe` and select Run as administrator.

---

When you first start Change Assistant, you see a welcome window. After you click Next, you see the Select Action page.

11. Select one of the actions on the Select Action page, as shown on this example, and click Next.

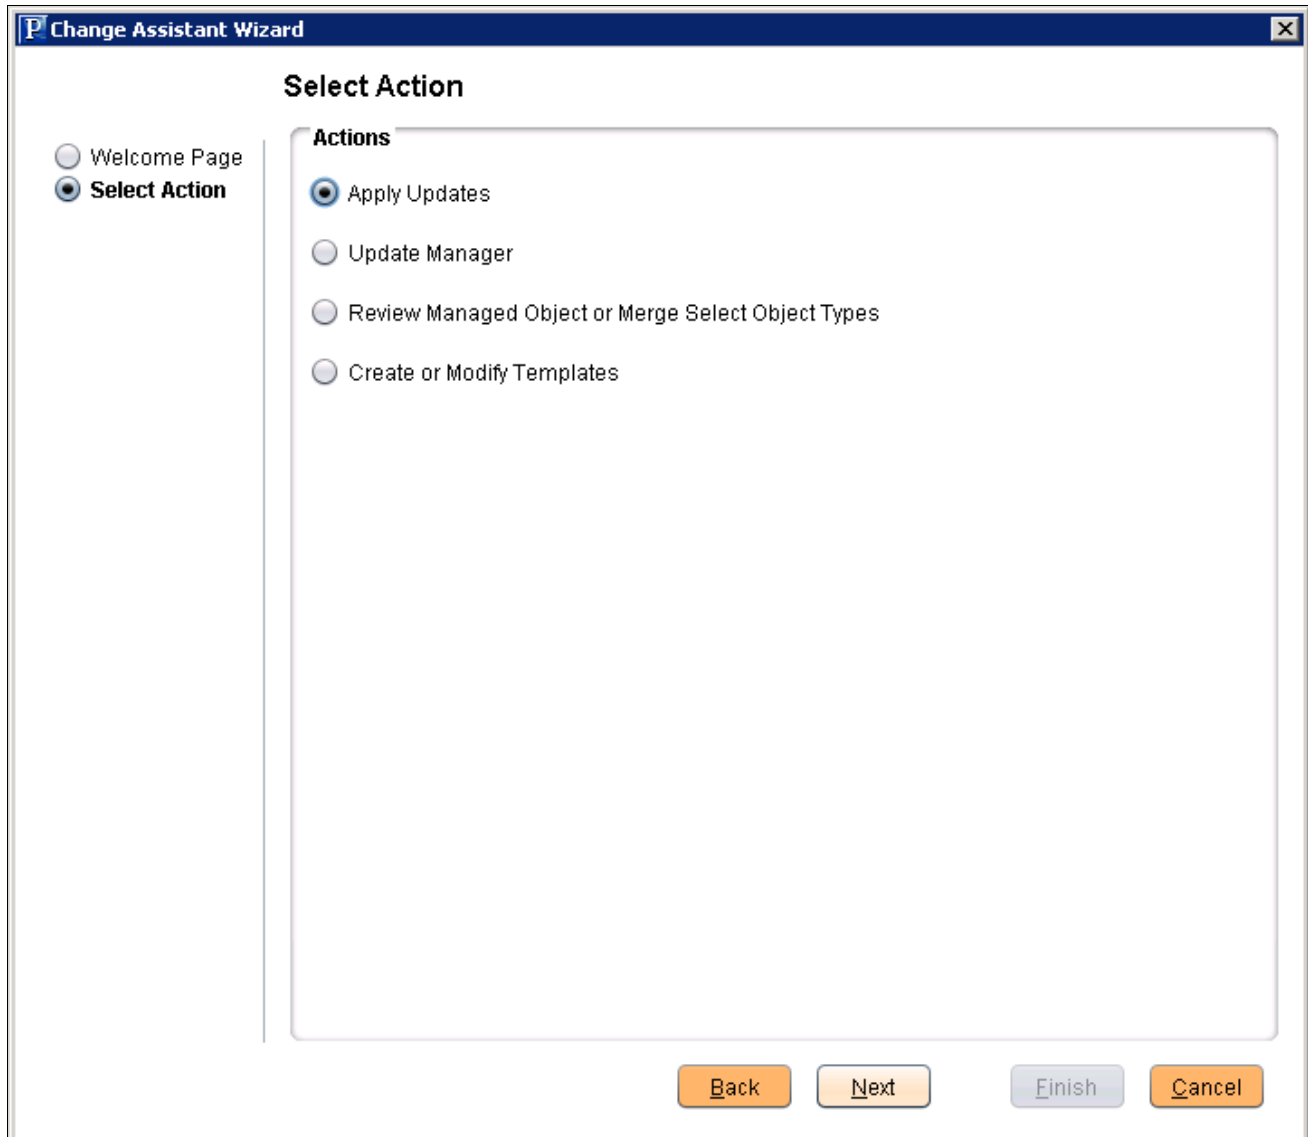

Change Assistant Wizard Select Action window

See the information on opening Change Assistant for the first time in the *PeopleTools: Change Assistant and Update Manager* product documentation for descriptions of these selections:

- Apply Updates
- Update Manager
- Review Managed Object or Merge Select Object Types
- Create or Modify Templates

## **Task 12-3: Installing PeopleSoft Change Assistant in Silent Mode**

This section discusses:

- Understanding Silent Mode for PeopleSoft Change Assistant

- Using the Silent Mode Script

## Understanding Silent Mode for PeopleSoft Change Assistant

You can carry out a silent installation of PeopleSoft Change Assistant by supplying command-line parameters to a script. With silent installation there is no user interaction after you begin the installation.

You can use install and upgrade PeopleSoft Change Assistant instances in silent mode for the current PeopleSoft PeopleTools release. In addition, you can use silent mode to remove installations from the current or earlier PeopleSoft PeopleTools releases. For example, running the silent mode installation from PeopleSoft PeopleTools 8.56 will remove a Change Assistant installation from PeopleSoft PeopleTools 8.54 or earlier, and also install the 8.56 version of Change Assistant.

The PeopleSoft Change Assistant installer includes the following files in the directory *PS\_HOME*\setup\PsCA:

- *silentInstall.bat* — Use this script to upgrade or remove an existing PeopleSoft Change Assistant instance or install a new instance.

Do not edit this file. The file includes instructions in the header portion.

See Using the Silent Mode Script.

- *CA-silentInstall-ResultCodes.rtf* — Review this file to interpret the results seen in the *PS\_HOME*\setup\psCA\setup.log file after installation.

The file is in Rich Text Format (RTF), and is most easily read if you open it with word processing software such as Microsoft Word.

### Task 12-3-1: Using the Silent Mode Script

The PeopleSoft Change Assistant silent mode script requires the following command-line parameters:

- Install Home

Specify the installation location for the PeopleSoft Change Assistant instance. If the location includes spaces, surround it with double quotes, such as "C:\Program Files\PeopleSoft\Change Assistant".

As mentioned earlier in this chapter, for PeopleSoft PeopleTools 8.56 you can install multiple instances of PeopleSoft Change Assistant. You must specify a different installation location for each instance.

- Install Type

- Specify *new* to create a new PeopleSoft Change Assistant instance.
- Specify *upgrade* to upgrade an existing instance that was installed from the current PeopleSoft PeopleTools release.
- Specify *uninstall* to remove an existing PeopleSoft Change Assistant instance.

- Backup Config

- Specify *backup* to create a zip file containing files with configuration information. The backup file, *changeassistantcfgbak.zip*, is saved in the installation location.
- Specify *nobackup* if you do not want to create a backup file with the configuration information.

To use the PeopleSoft Change Assistant silent installation script:

1. In a command prompt, go to *PS\_HOME*\setup\PsCA.

---

**Note.** Do not move the file to another location.

---

2. Run the following command:



```
silentInstall.bat [Install Home] [Install Type] [Backup Config]
```

You must include all three parameters. For example:

- To install a new instance without retaining a configuration file

```
silentInstall.bat "C:\Program Files\PeopleSoft\Change Assistant" new⇒  
nobackup
```

- To upgrade an existing instance, and retain a configuration file:

```
silentInstall.bat "C:\Program Files\PeopleSoft\Change Assistant 3"⇒  
upgrade backup
```

- To remove an existing instance, and retain a configuration file:

```
silentInstall.bat D:\CA uninstall backup
```

## **Task 12-4: Configuring and Using PeopleSoft Change Assistant**

This section discusses:

- Verifying the Path Variable
- Specifying Options
- Scanning the Workstation
- Exporting Jobs to XML, HTML, or Microsoft Excel Format

### **Task 12-4-1: Verifying the Path Variable**

After installing PeopleSoft Change Assistant, verify that the following values are the first entries in the PATH environment variable:

- *PS\_HOME*\bin\client\winx86
- *PS\_HOME*\jre\bin

See *PeopleTools: Change Assistant and Update Manager*, "Setting Up Change Assistant."

### **Task 12-4-2: Specifying Options**

You can configure PeopleSoft Change Assistant modes to carry out updates, upgrades, work with upgrade templates, or access PeopleSoft Update Manager. The mode selection determines which menu options you see when you use PeopleSoft Change Assistant.

### **See Also**

*PeopleTools: Change Assistant and Update Manager*

PeopleSoft Update Manager Home Page, My Oracle Support, Doc ID 1641843.2

### **Task 12-4-3: Scanning the Workstation**

The first time you use PeopleSoft Change Assistant, it automatically scans your workstation for applications that it will use in order to automate the steps. For example, it automatically finds the SQL Query tool and uses it to run SQL commands or scripts.

If you add a new application or update an existing application, PeopleSoft Change Assistant must perform a scan of the system in order to discover the changes. To perform this scan, select Tools, Scan Configuration.

### **Task 12-4-4: Exporting Jobs to XML, HTML, or Microsoft Excel Format**

Change Assistant allows users to export jobs to XML, HTML, or Microsoft Excel file formats. Do this by selecting File, Export Job in Change Assistant. Then, enter the desired exported filename and select the desired file type format.

### **Task 12-5: Validating Change Assistant Settings**

---

After you have set up and configured PeopleSoft Change Assistant and the Environment Management components, you should validate your PeopleSoft Change Assistant and environment settings.

PeopleSoft Change Assistant validates settings by:


- Locating valid SQL query tools required to run SQL scripts.
- Testing the Environment Management hub and ensuring that PeopleSoft Change Assistant can communicate with it.
- Testing My Oracle Support and ensuring that PeopleSoft Change Assistant can communicate with it.

PeopleSoft Change Assistant sends a ping to My Oracle Support and then tests the connection. In order for the validation to succeed, the machine where you have PeopleSoft Change Assistant installed must have the ping feature enabled.

You can also print a summary of your environment, which can facilitate the diagnosis of problems by OracleSoftware Support.

To validate your environment, select Tools, Options, Validate. Click Start Validation.

If any of the steps were unable to complete successfully, open the log file to determine the cause. This example shows a summary with both successful messages ("Done") and unsuccessful ("Failed" or "Unsuccessful completion"):

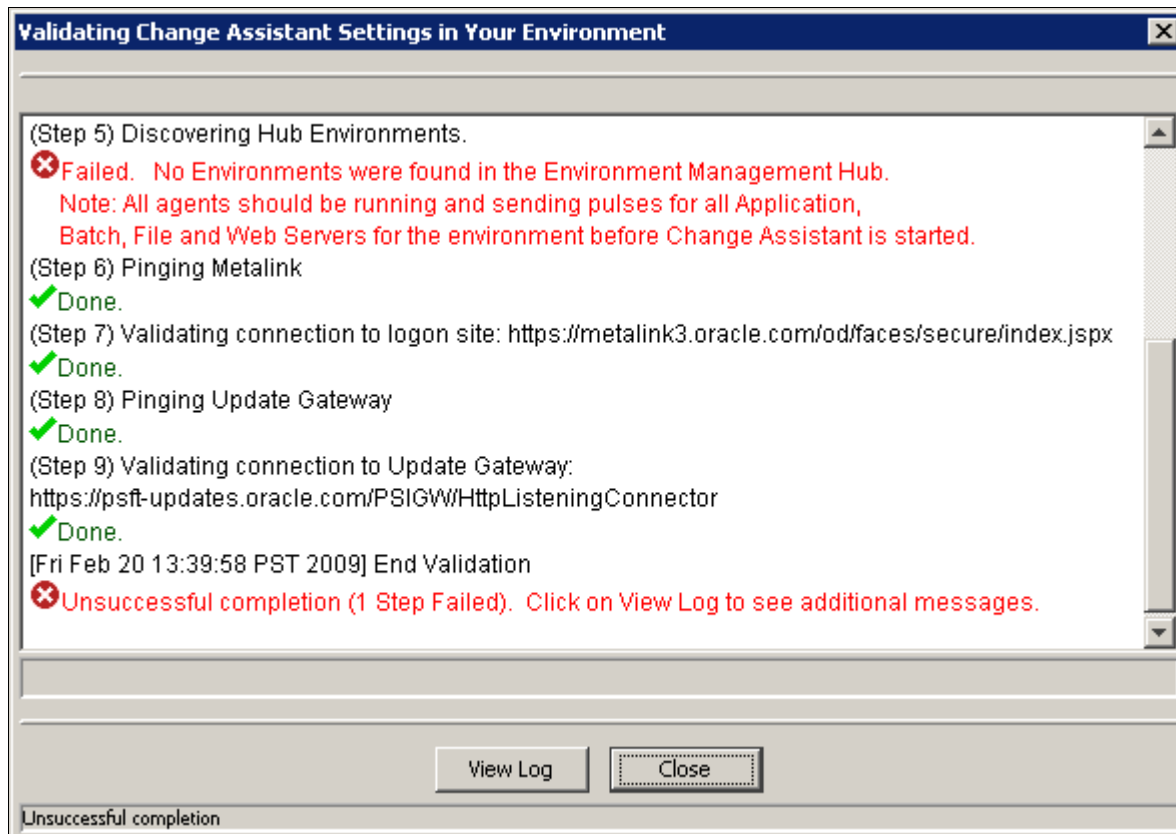


Validating Change Assistant Settings in Your Environment

---

**Note.** If you use proxy servers, the system will ping those and prompt for proxy server user ID and password. In this case, the validation step numbers would be different from the example.

---

To review the log file, click the View Log button at the bottom of the screen. This example shows the first several lines of a log file:

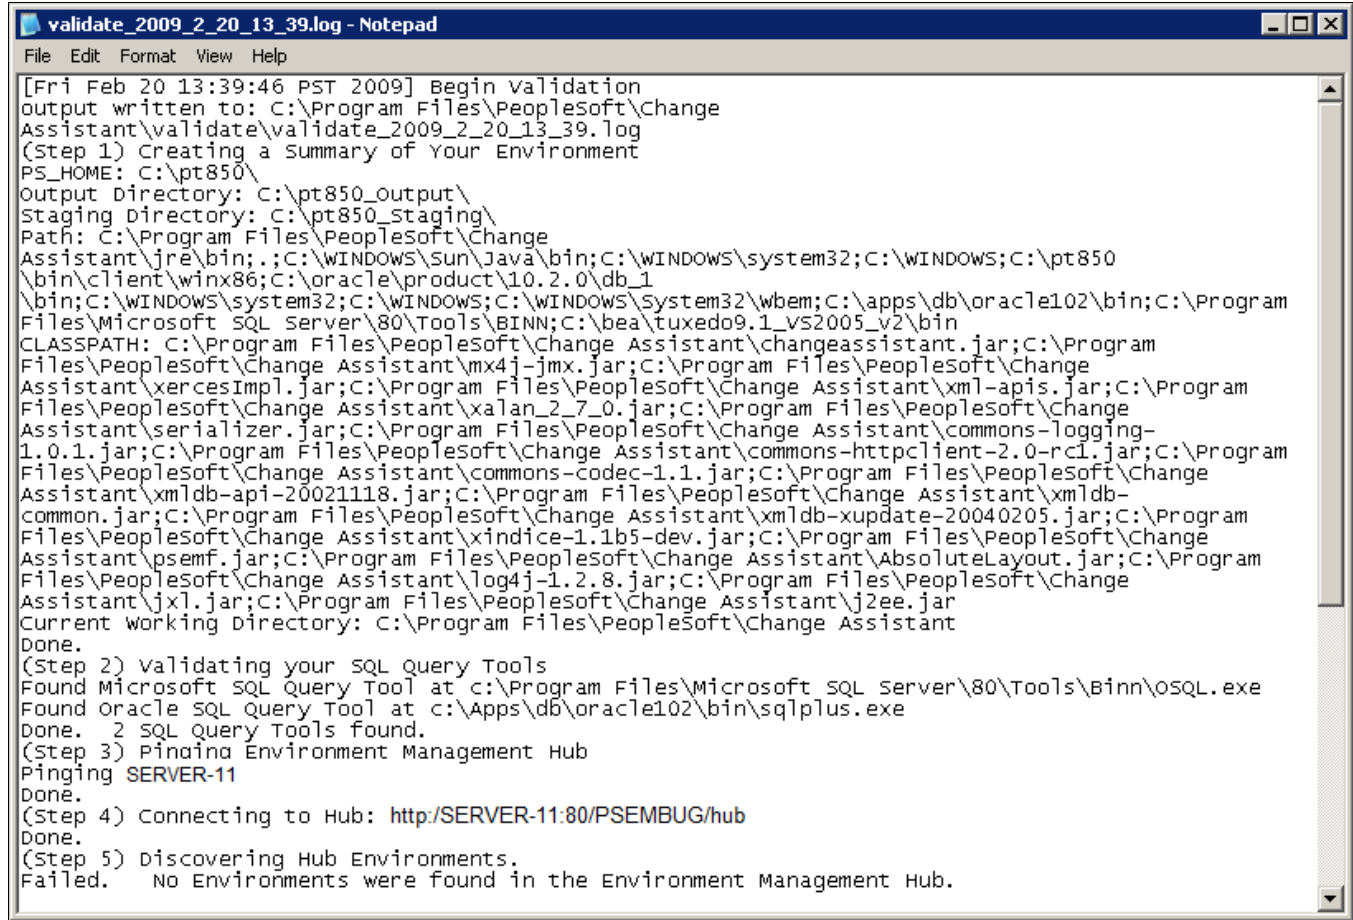

```

[Fri Feb 20 13:39:46 PST 2009] Begin validation
output written to: C:\Program Files\PeopleSoft\Change
Assistant\validate\validate_2009_2_20_13_39.log
(Step 1) Creating a Summary of Your Environment
PS_HOME: C:\pt850\
Output Directory: C:\pt850_output\
Staging Directory: C:\pt850_staging\
Path: C:\Program Files\PeopleSoft\Change
Assistant\jre\bin;. ;C:\WINDOWS\Sun\Java\bin;C:\WINDOWS\system32;C:\WINDOWS;C:\pt850
\bin\client\winx86;C:\oracle\product\10.2.0\db_1
\bin;C:\WINDOWS\system32;C:\WINDOWS;C:\WINDOWS\System32\wbem;C:\apps\db\oracle102\bin;C:\Program
Files\Microsoft SQL Server\80\Tools\BINN;C:\bea\tuxedo9.1_v2\bin
CLASSPATH: C:\Program Files\PeopleSoft\Change Assistant\changeassistant.jar;C:\Program
Files\PeopleSoft\Change Assistant\mx4j-jmx.jar;C:\Program Files\PeopleSoft\Change
Assistant\xercesImpl.jar;C:\Program Files\PeopleSoft\Change Assistant\xml-apis.jar;C:\Program
Files\PeopleSoft\Change Assistant\xalan_2_7_0.jar;C:\Program Files\PeopleSoft\Change
Assistant\serializer.jar;C:\Program Files\PeopleSoft\Change Assistant\commons-logging-
1.0.1.jar;C:\Program Files\PeopleSoft\Change Assistant\commons-httpclient-2.0-rc1.jar;C:\Program
Files\PeopleSoft\Change Assistant\commons-codec-1.1.jar;C:\Program Files\PeopleSoft\Change
Assistant\xml-db-api-20021118.jar;C:\Program Files\PeopleSoft\Change Assistant\xml-db-
common.jar;C:\Program Files\PeopleSoft\Change Assistant\xml-db-xupdate-20040205.jar;C:\Program
Files\PeopleSoft\Change Assistant\xindice-1.1b5-dev.jar;C:\Program Files\PeopleSoft\Change
Assistant\psemf.jar;C:\Program Files\PeopleSoft\Change Assistant\AbsoluteLayout.jar;C:\Program
Files\PeopleSoft\Change Assistant\log4j-1.2.8.jar;C:\Program Files\PeopleSoft\Change
Assistant\jxl.jar;C:\Program Files\PeopleSoft\Change Assistant\j2ee.jar
Current working Directory: C:\Program Files\PeopleSoft\Change Assistant
Done.
(Step 2) validating your SQL Query Tools
Found Microsoft SQL Query Tool at c:\Program Files\Microsoft SQL server\80\Tools\Binn\osql.exe
Found oracle SQL Query Tool at c:\Apps\db\oracle102\bin\sqlplus.exe
Done. 2 SQL query Tools found.
(Step 3) Pinging Environment Management Hub
Pinging SERVER-11
Done.
(Step 4) Connecting to Hub: http://SERVER-11:80/PSEMPUG/hub
Done.
(Step 5) Discovering Hub Environments.
Failed. No Environments were found in the Environment Management Hub.

```

Validation log

## Chapter 13

# Installing PeopleSoft Change Impact Analyzer

This chapter discusses:

- Prerequisites
- Removing PeopleSoft Change Impact Analyzer Installations
- Installing PeopleSoft Change Impact Analyzer
- Installing and Removing PeopleSoft Change Impact Analyzer in Silent Mode

## Prerequisites

---

Oracle's PeopleSoft Change Impact Analyzer is a tool you can use to evaluate the effect of changes you make on your installation. PeopleSoft Change Impact Analyzer can help you monitor the impact a Change Package has on your system, as well as monitor the impact from other changes such as customizations.

Ensure that your system meets the following requirements before you begin this installation:

- PeopleSoft Change Impact Analyzer runs on Microsoft Windows platforms. For database platforms that do not run on Microsoft Windows, install PeopleSoft Change Impact Analyzer on the Windows client.
- You can install PeopleSoft Change Impact Analyzer from downloaded files as a standalone application, or as a part of your PeopleSoft PeopleTools installation. These instructions assume you have installed PeopleSoft PeopleTools on the machine on which you want to run PeopleSoft Change Impact Analyzer, and have completed the PeopleSoft Change Assistant installation.
- You must install JDBC drivers for connectivity to your database platform. PeopleSoft Change Impact Analyzer uses Type 4 JDBC drivers by default.

You can normally obtain JDBC drivers from your RDBMS vendor. Search the vendor's web site or contact the vendor for information.

## See Also

*PeopleTools: Change Impact Analyzer*


## Task 13-1: Removing PeopleSoft Change Impact Analyzer Installations

---

To uninstall an existing installation of PeopleSoft Change Impact Analyzer, use the setup utility for the current release, as follows:


1. From the *PS\_HOME*\setup\PscIA directory, run `installCIA.exe`.
2. If there is an existing installation of PeopleSoft Change Impact Analyzer on your machine, the Remove the program window appears.

Click Next to remove all installed features.

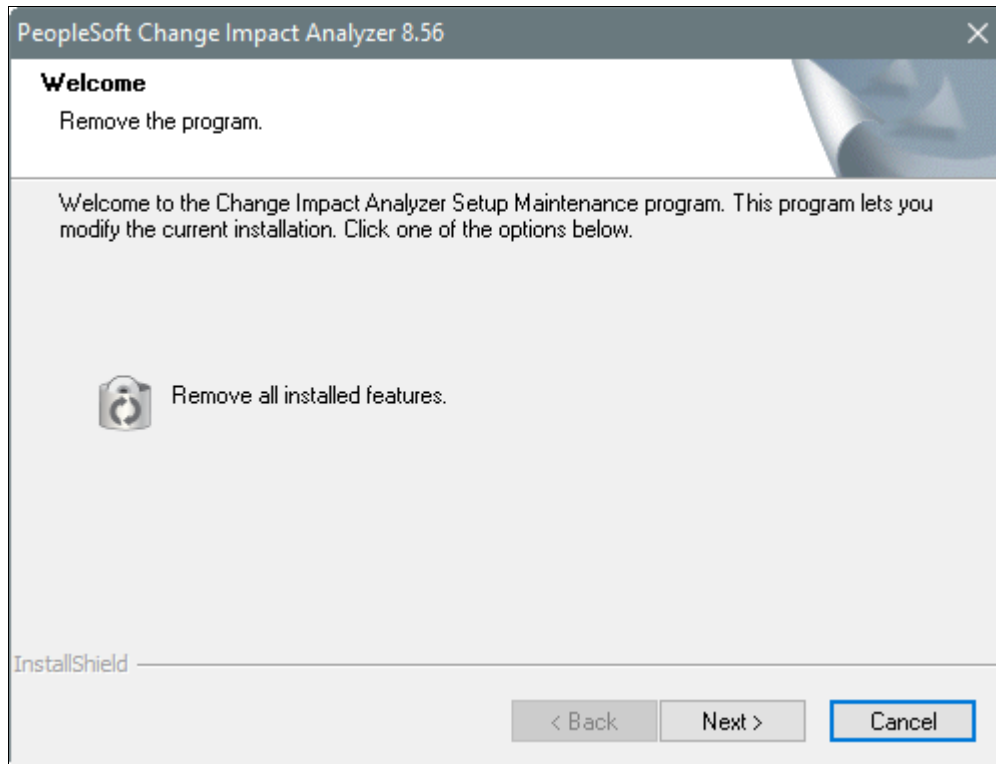


PeopleSoft Change Impact Analyzer Remove the program window

3. Click OK to confirm that you want to remove the previous PeopleSoft Change Impact Analyzer installation.

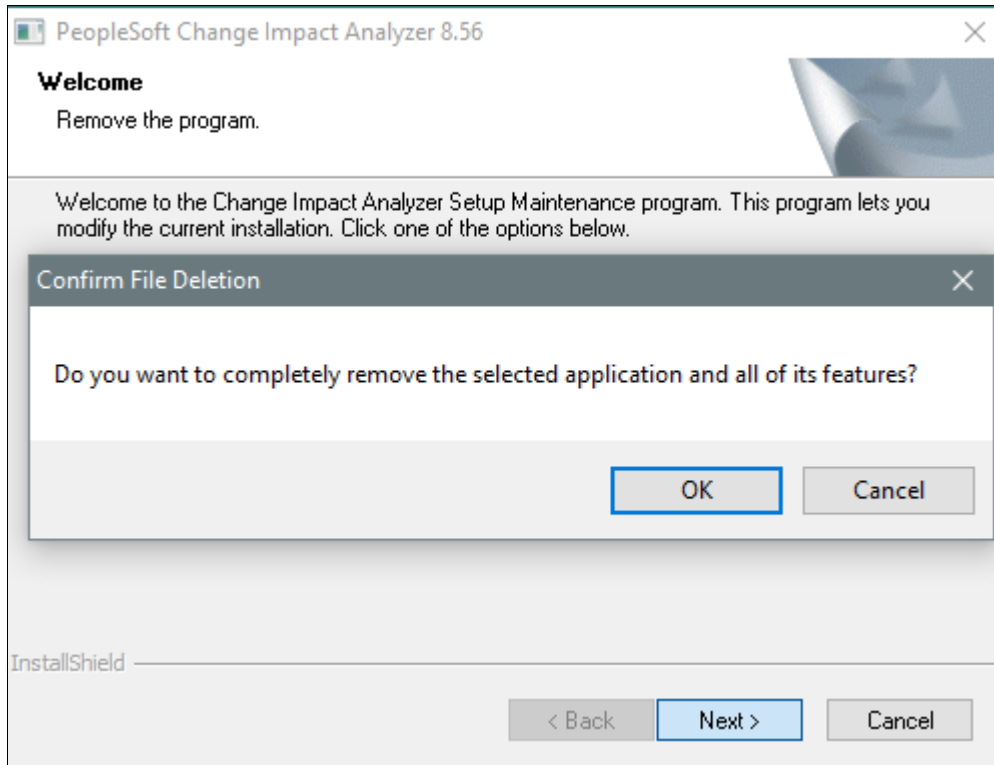

Confirm File Deletion message dialog box

4. When the removal process is complete, click Finish on the Uninstall Complete window.

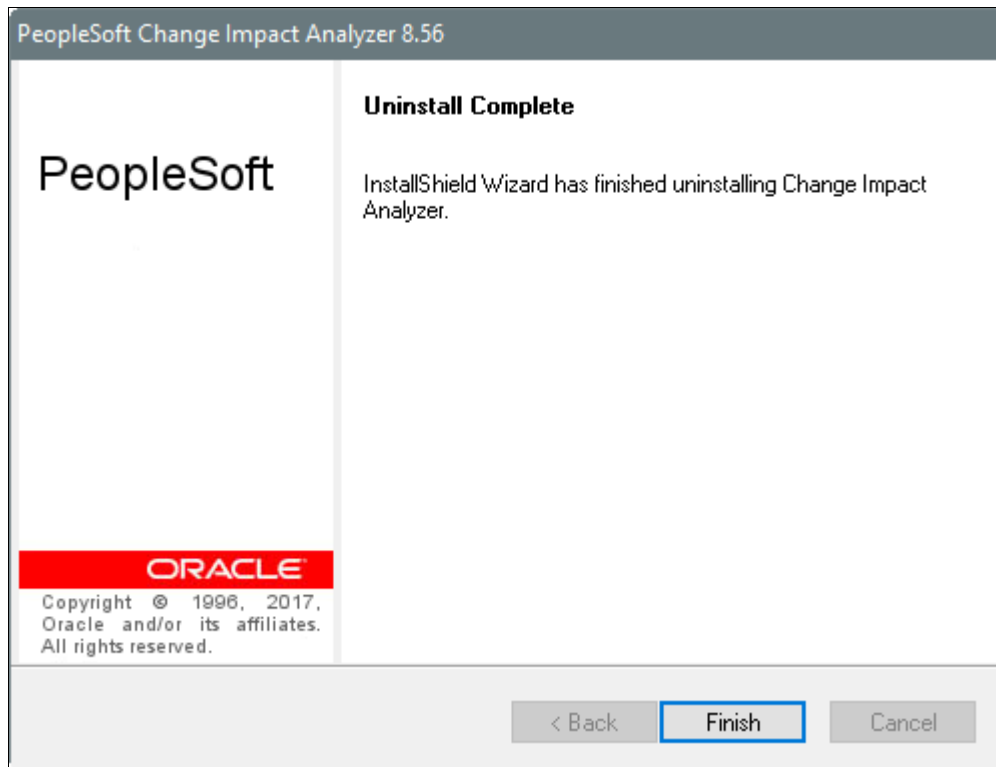

PeopleSoft Change Impact Analyzer Uninstall Complete window

5. Use the instructions in the next section, Installing PeopleSoft Change Impact Analyzer, to install the current release.

## **Task 13-2: Installing PeopleSoft Change Impact Analyzer**

To install PeopleSoft Change Impact Analyzer and Rules Editor:




1. From the *PS\_HOME*\setup\PscIA directory, run *installCIA.exe*.

---

**Note.** If you installed PeopleSoft PeopleTools on a UNIX or Linux computer, you can copy *installCIA.exe* to a Microsoft Windows machine to install.

---


The Welcome window appears, as in this example. Click Next.

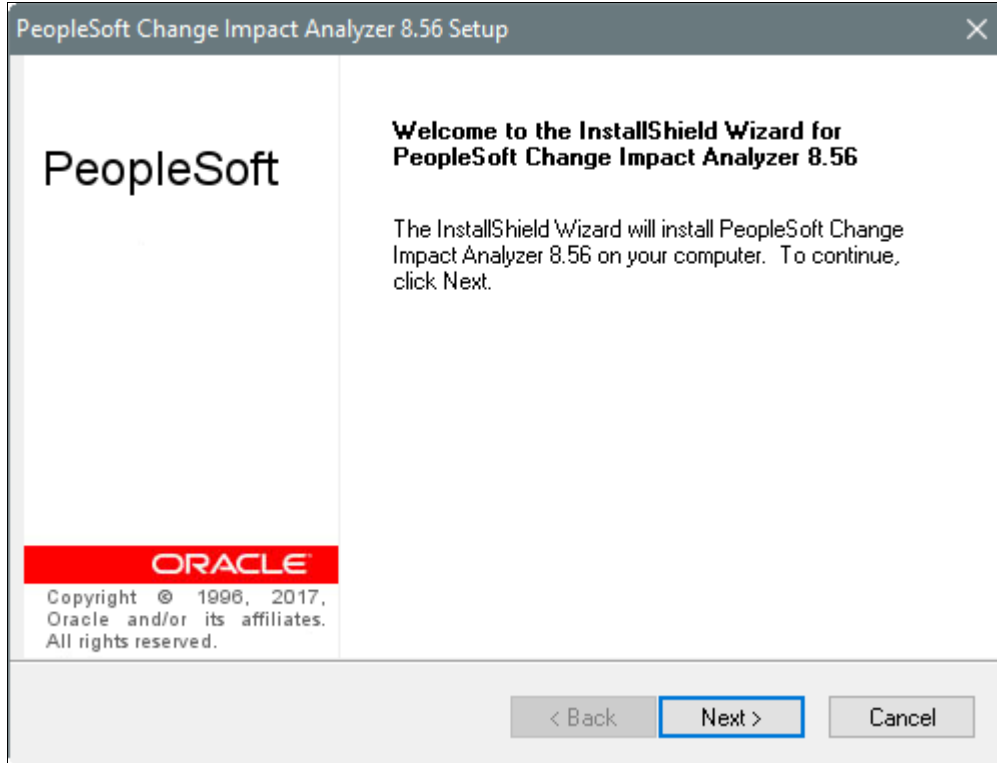

PeopleSoft Change Impact Analyzer Setup Welcome window

2. Select the type of JDBC drivers for your database platform.

In this example the option DB2, for DB2 z/OS or DB2/LUW, is selected.

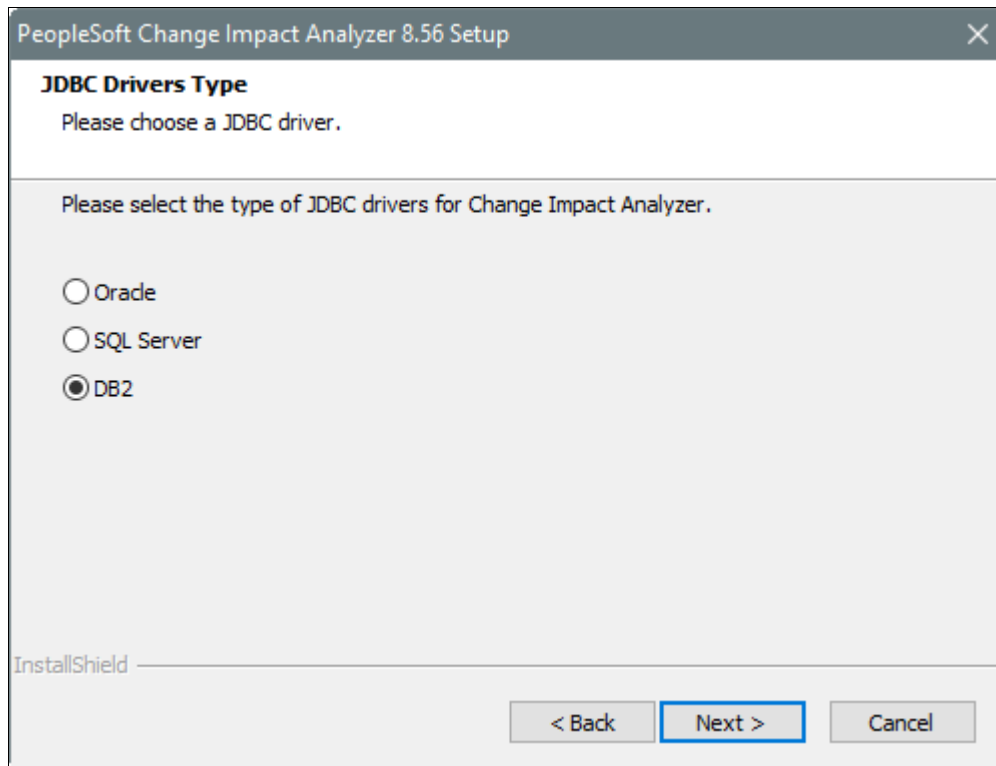

PeopleSoft Change Impact Analyzer Setup JDBC Drivers Type window

3. Browse to select the directory where the JDBC drivers are installed, or accept the default location.

---

**Note.** If the installation program cannot find the correct JDBC drivers, you will see a warning message after you click Next on the Choose JDBC Drivers Location window.

---


The following example shows the location where the JDBC drivers are installed by default, C:\jdbcDrivers.

---

**Note.** For DB2/LUW releases v9.x and later, the JDBC drivers are available from the IBM web site.

See IBM Download DB2 Fix Packs by version for DB2 for Linux, UNIX and Windows, <http://www-01.ibm.com/support/docview.wss?rs=71&uid=swg27007053>


---

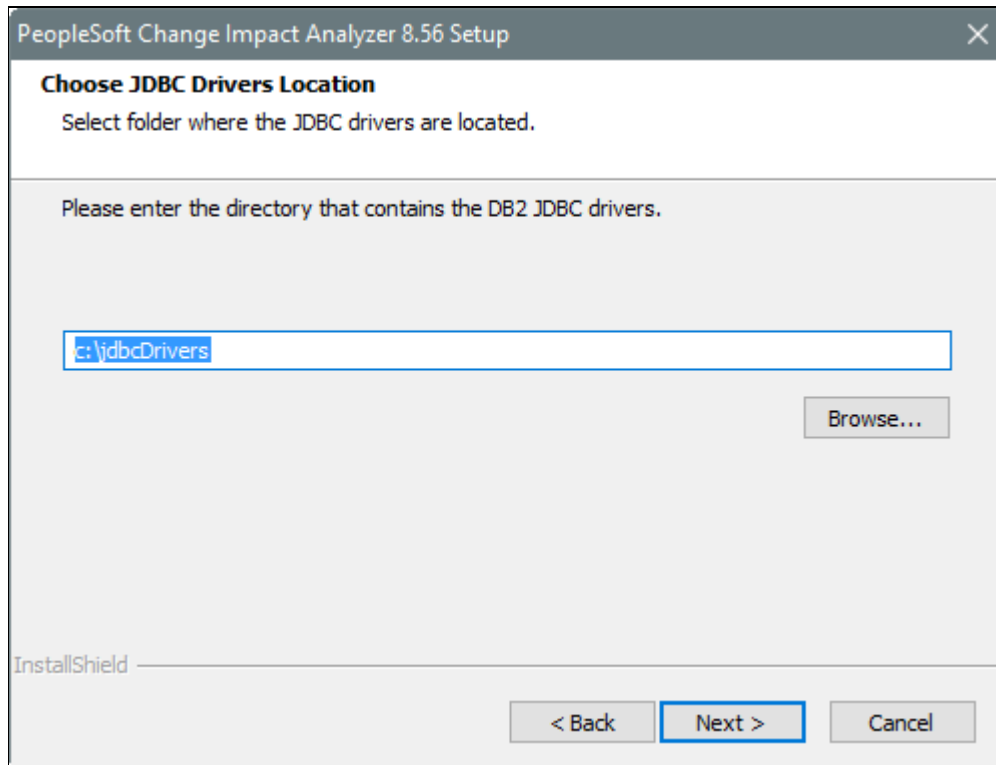

PeopleSoft Change Impact Analyzer Setup Choose JDBC Drivers Location window

4. Browse to select the directory where PeopleSoft Change Impact Analyzer will be installed, or accept the default directory.


The default directory, which is truncated in this example, is C:\Program Files\PeopleSoft\Change Impact Analyzer.

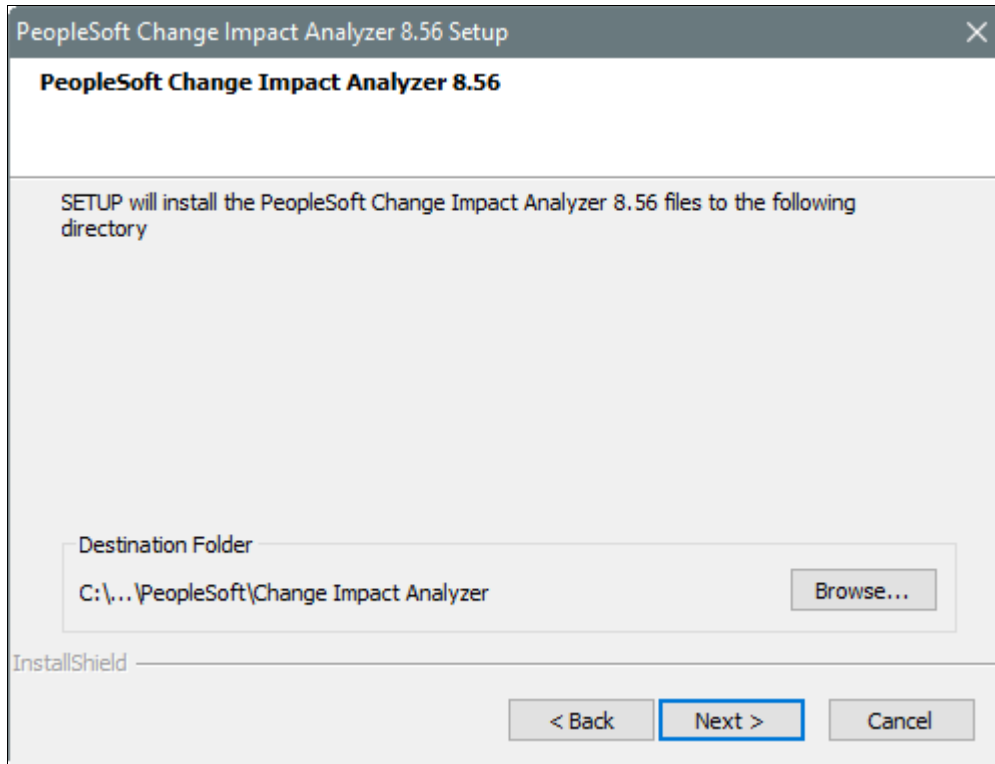

PeopleSoft Change Impact Analyzer Setup window with default destination folder


5. Click Back to review or change any settings.

If you are satisfied with your settings, click Next to begin copying files to the designated directory.

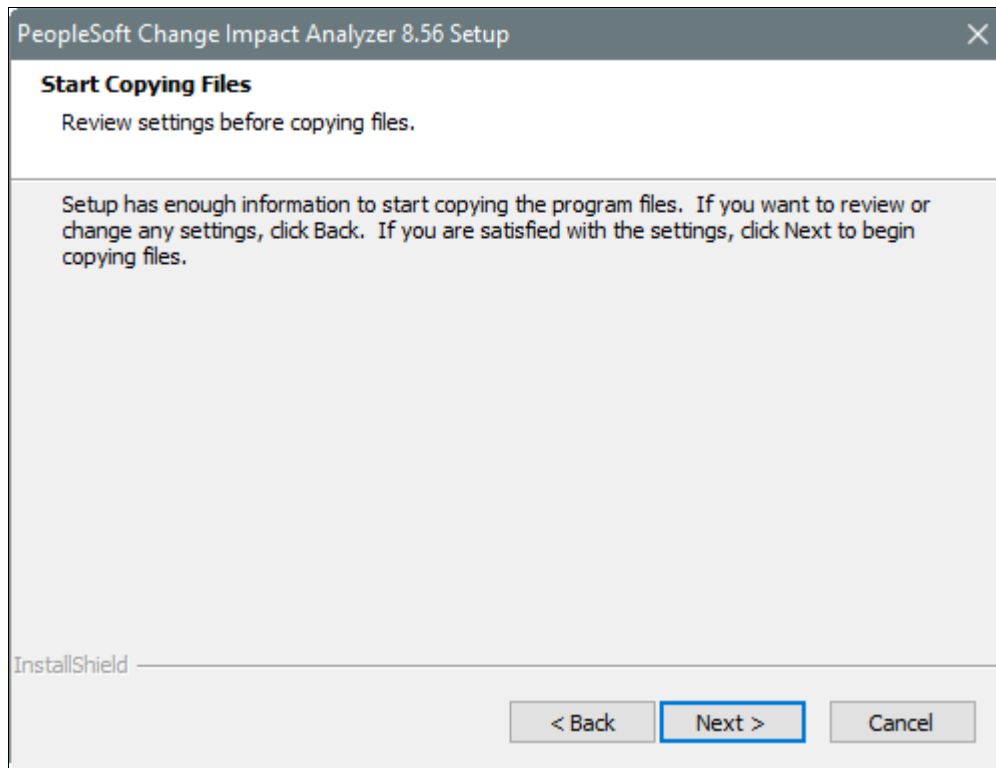

PeopleSoft Change Impact Analyzer Setup Start Copying Files window

6. Click Finish to exit when the installation is complete, on the InstallShield Wizard Complete window.

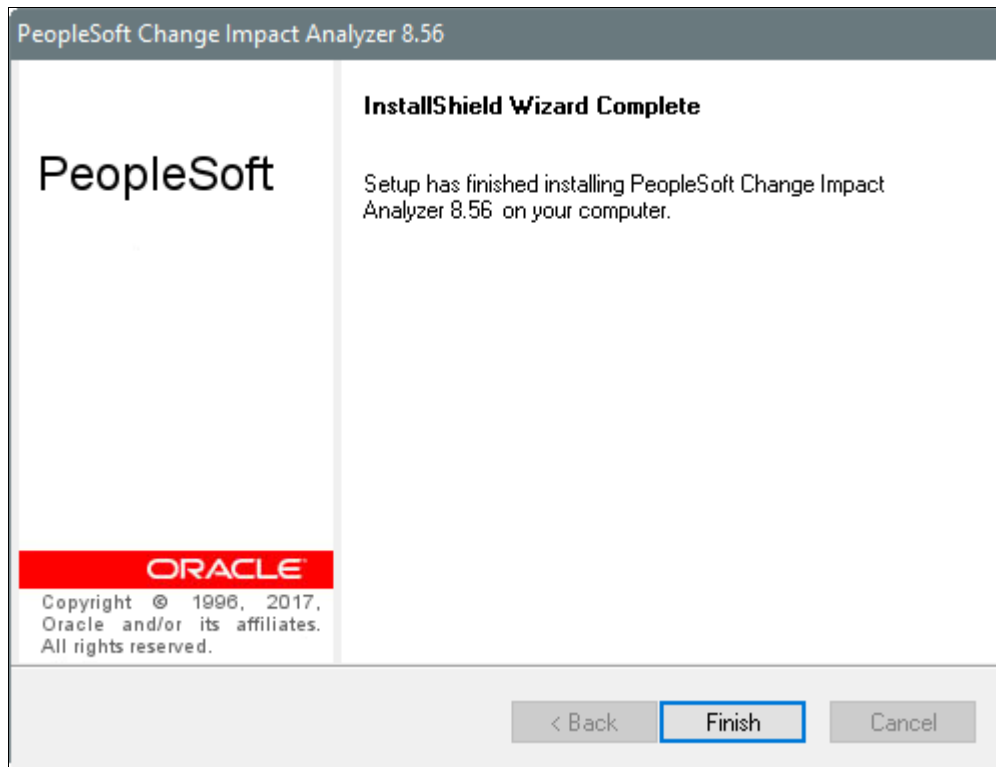

PeopleSoft Change Impact Analyzer Setup InstallShield Wizard Complete window

7. To start PeopleSoft Change Impact Analyzer, on Microsoft Windows 7, select Start, Programs, PeopleSoft 8.56, Change Impact Analyzer.

On Microsoft Windows 8 or 2012 R2, access the Apps screen and navigate to PeopleSoft 8.56, Change Impact Analyzer.

## Task 13-3: Installing and Removing PeopleSoft Change Impact Analyzer in Silent Mode

---

This section discusses:

- Understanding Silent Mode for PeopleSoft Change Impact Analyzer
- Installing PeopleSoft Change Impact Analyzer in Silent Mode
- Removing the PeopleSoft Change Impact Analyzer Installation in Silent Mode
- Removing and Installing PeopleSoft Change Impact Analyzer in Silent Mode

### Understanding Silent Mode for PeopleSoft Change Impact Analyzer

You can carry out a silent installation or removal of PeopleSoft Change Impact Analyzer by editing a response file to correspond to your installation requirement. When you work in silent mode there is no user interaction after you begin the installation or removal.

The PeopleSoft Change Impact Analyzer installer includes the following files in the directory *PS\_HOME*\setup\PscIA:

- CIA-silent-install-response-file.txt — Use this response file to install PeopleSoft Change Impact Analyzer.
- CIA-silent-uninstall-response-file.txt — Use this response file to remove PeopleSoft Change Impact Analyzer installations.
- silentInstall.bat — Use this script to remove an existing PeopleSoft Change Impact Analyzer installation, and install a new instance.
- silentInstall-ResultCodes.rtf — Review this file to interpret the results seen in the setup.log file after installation.

The file is in Rich Text Format (RTF), and is most easily read if you open it with an authoring tool, such as Microsoft Word.

## Task 13-3-1: Installing PeopleSoft Change Impact Analyzer in Silent Mode

This section discusses:

- Editing the Response File
- Running the Silent Mode Installation

### Editing the Response File

Review the header portion at the top of the response file for instructions on running the silent installation. Modify the response file according to your installation requirement. The sections labelled NOTE TO USER include items to be modified.

Open the file *PS\_HOME*\setup\PscIA\CIA-silent-install-response-file.txt for editing, modify the following items, and then save the file:

- JDBC driver type

Enter 1 to specify your RDBMS platform, and 0 for the other selections. The options are: Oracle (default), MSS (Microsoft SQL Server), or DB2 (DB2 z/OS or DB2/LUW).

```
##### NOTE TO USER #####
# the following option is for DB type for JDBC driver
# the default is Sel-0=1, for Oracle
# set the Sel-1=1 for MSS
# set the Sel-2=1 for DB2
# NOTE: the options are mutually exclusive
Sel-0=1
Sel-1=0
Sel-2=0
```

- Path to JDBC driver

Enter the full path to the JDBC driver for szPath.

```
##### NOTE TO USER #####
# For MSS & DB2 please enter the path to JDBC driver for "szPath" below
szPath=c:\jdbcDrivers
```

- Installation location

The default location is C:\Program Files\PeopleSoft\Change Impact Analyzer. If you want to install to a

different location, enter the location for szDir.

```
##### NOTE TO USER #####
# For "szDir" enter the path where you want to install the Change Impact=>
  Analyzer
szDir=C:\Program Files\PeopleSoft\Change Impact Analyzer
```

## Running the Silent Mode Installation

To run the silent mode installation with the modified response file:

1. In a command prompt, go to *PS\_HOME*\setup\PscIA.
2. Run the following command, substituting your *PS\_HOME* location for %PS\_HOME% in the command:

```
installCIA.exe /s /f1"%PS_HOME%\setup\PscIA\CIA-silent-install-response->
file.txt"
```

3. After the installation is complete, review the result status in the file *PS\_HOME*\setup\PscIA\setup.log. Result code 0 means a successful installation. The result codes are described in the file *PS\_HOME*\setup\PscIA\silentInstall-ResultCodes.rtf.

## Task 13-3-2: Removing the PeopleSoft Change Impact Analyzer Installation in Silent Mode

Review the header portion at the top of the response file for instructions. The process will search for and remove an existing installation of PeopleSoft Change Impact Analyzer. You do not need to edit the file before running. The file must be located in *PS\_HOME*\setup\PscIA.

1. In a command prompt, go to *PS\_HOME*\setup\PscIA.
2. Run the following command, substituting your *PS\_HOME* location for %PS\_HOME% in the command

```
installCIA.exe /s /f1"%PS_HOME%\setup\PscIA\CIA-silent-uninstall->
response-file.txt"
```

3. After the installation is complete, review the result status in the file *PS\_HOME*\setup\PscIA\setup.log. Result code 0 means a successful installation. The result codes are described in the file *PS\_HOME*\setup\PscIA\silentInstall-ResultCodes.rtf.

## Task 13-3-3: Removing and Installing PeopleSoft Change Impact Analyzer in Silent Mode

Use the silentInstall.bat script to remove an existing installation of PeopleSoft Change Impact Analyzer and install a new installation. This script runs commands using CIA-silent-uninstall-response-file.txt followed by CIA-silent-install-response-file.txt. Refer to the previous sections for information on those response files.

To remove an existing installation and reinstall:

1. In a command prompt, go to *PS\_HOME*\setup\PscIA.
2. Run the following command:

```
silentInstall.bat
```

3. After the installation is complete, review the result status in the file *PS\_HOME*\setup\PscIA\setup.log.



Result code 0 means a successful installation. The result codes are described in the file *PS\_HOME\setup\PscIA\silentInstall-ResultCodes.rtf*.



## Chapter 14

# Adding New Product Modules

### **Task 14-1: Adding New Modules to PeopleSoft 8.4 Installations**

---

This task explains how to add new application modules to an existing PeopleSoft installation. Follow this procedure if, for example, you already installed HCM Benefits Administration and now you need to install Pension Administration.

When you add new application modules to an existing installation, you may overwrite files that were included as part of a patch or fixes, or customizations that you applied. For example, suppose you customize a report that is updated in a subsequent PeopleSoft release. If you install the update into your current working directory, your customized report will be overwritten with the newly installed, updated report.

The PeopleSoft system does not currently provide an automated way to notify you before overwriting customized modules or patch files. You can make preparations to protect important files from being overwritten. For your customized modules, you need to maintain a backup of any customizations. It is also a good idea to make a copy of your *PS\_HOME* directory before beginning this process, so that you can find and restore necessary patch files. Check My Oracle Support to identify any patches or fixes required for your installation.

See My Oracle Support, Patches & Updates.

To add new module(s) to PeopleSoft 8.4 installations:

1. Back up the database, file server, application server, Process Scheduler Server, and web server components of your current system.
2. Make sure you have the new license code that includes the new module(s). The new license code allows you to load the batch components for the new module(s).

See "Using the PeopleSoft Installer," Obtaining License Codes.

3. Install the PeopleSoft Application software on the file server.
4. When prompted, enter the new license code for your applications.  
Initially, all installation options will be selected. You must deselect those programs you do not wish to install.
5. Launch Data Mover in bootstrap mode by logging on with the access ID and password).  
Data Mover is located in *PS\_HOME*\bin\client\winx86\psdmt.exe.  
See Checking the Log Files and Troubleshooting, Running Data Mover, in the chapters on creating a database.
6. Select File, Database Setup and choose your database type in the resulting dialog.
7. Select Next and select add new product.
8. Select Finish and a Data Mover script that updates the license code will be generated in Data Mover.
9. Select File, Run script and your database updates are complete.
10. Install software to your batch server.

See the chapters on setting up Process Scheduler in this documentation.

11. Reapply all code customizations if needed.

---

**Note.** Remember to maintain backup copies of your customizations.

---

12. Compile and link COBOL.

See the chapters on installing and compiling COBOL in this documentation.

13. Verify that the appropriate Installation Records are selected.

If they are not checked, check them and save the page. To open the page, select Set Up <apptype>, Install, Installation Options, where <apptype> is CRM, Financials/Supply Chain Management, and so on. For example, Set Up CRM, Install, Installation Options. (For HCM the navigation is Set Up HCM, Install, Installation Table.)

14. Run the dddaudit and sysaudit SQR reports.

If you are swapping the base language, also run swpaudit.sqr.

See "Completing the Database Setup," Checking the Database.

15. Shut down all application servers.

16. Install software to your application server.

See the chapters on configuring the Application Server in this documentation.

17. Restart all required application servers.

18. Shut down all web servers.

19. Install software to your web server.

See the chapters on setting up the PeopleSoft Pure Internet Architecture in this documentation.

## Chapter 15

# Installing the PeopleSoft Online Help Solution

This chapter discusses:

- Understanding PeopleSoft Online Help (PeopleBooks)
- Using the PeopleSoft Online Help Web Site for Context-Sensitive Help
- Configuring Context-Sensitive Help with Local Installations

## Understanding PeopleSoft Online Help (PeopleBooks)

---

The documentation for PeopleSoft PeopleTools and PeopleSoft software applications, formerly known as PeopleBooks, is now available in a dynamic, interactive, accessible HTML version, the hosted PeopleSoft Online Help Web site. The PeopleSoft Online Help documentation that is accessed with the Help link in the PeopleSoft navigation bar, and the Oracle's PeopleSoft Online Help Web site, are developed for advanced users, administrators, and implementers of the application. End users should utilize embedded help or licensed UPK content for more specific help assistance.

PeopleSoft software applications will include translated embedded help. With the PeopleSoft 9.2 release, PeopleSoft documentation aligned with the other Oracle applications by focusing on embedded help. We offer very direct translated help at crucial spots within our application through our embedded help widgets. Additionally, we have a one-to-one mapping of application and help translations. This means that the software and embedded help translation footprint are identical, something we were never able to accomplish in the past.

The PeopleSoft Online Help is delivered with PeopleSoft PeopleTools and every PeopleSoft application. You have several options for deploying PeopleSoft Online Help to benefit your organization. This chapter describes the methods for accessing, installing, and configuring PeopleSoft Online Help.

- *Hosted PeopleSoft Online Help Web site:* Use PeopleSoft Online Help over the Internet with the hosted content on the hosted PeopleSoft Online Help Web site.
- *Context-sensitive help:* Configure PeopleSoft PeopleTools to call PeopleSoft Online Help as context-sensitive help from both Internet applications and Microsoft Windows-based programs. For instance, when a user clicks the Help link in a browser or presses F1 in Windows, the appropriate documentation appears. You can set up context-sensitive help for both local installations and to access the hosted content on the PeopleSoft Online Help Web site.

---

**Note.** The F1 button accesses PeopleSoft Online Help only for the PeopleTools Development Environment (the Windows-based client). If you press F1 while using the portal, you invoke the help for your current browser. For context-sensitive help in the portal, users need to click the Help link to call PeopleSoft Online Help.

---

- *PDF format:* You can download a PDF version of PeopleSoft Online Help, organized in the traditional PeopleBooks format, from the Oracle Technology Network (OTN).

## See Also

Oracle Documentation, Oracle Technology Network,  
<http://www.oracle.com/technetwork/documentation/index.html>

"Preparing for Installation," Planning Multilingual Strategy

*PeopleTools: Applications User's Guide*, "Accessing Embedded Help"

## Task 15-1: Using the PeopleSoft Online Help Web Site for Context-Sensitive Help

---

This section discusses:

- Understanding the PeopleSoft Online Help Web Site
- Setting Up Context-Sensitive Help with the PeopleSoft Online Help Web Site
- Setting Up F1 Help with the PeopleSoft Online Help Web Site

### Understanding the PeopleSoft Online Help Web Site

PeopleSoft Online Help is immediately available for use over the Internet at the PeopleSoft Online Help Web site. To configure context-sensitive help with the PeopleSoft Online Help web site, you must have an Internet connection available to your server where PeopleSoft PeopleTools is installed.

See PeopleSoft Online Help, [www.peoplesoftonlinehelp.com](http://www.peoplesoftonlinehelp.com).

Alternatively, you can install PeopleSoft Online Help to a file server hosting web server software, as described in the section Installing the PeopleSoft Online Help Locally.

### Task 15-1-1: Setting Up Context-Sensitive Help with the PeopleSoft Online Help Web Site

You can configure your PeopleSoft server to use the hosted documentation from the PeopleSoft Online Help Web site for context-sensitive help. Each page in your PeopleSoft applications includes a Help icon that, when clicked, opens a new browser window displaying help topics that discuss that page. To enable the Help link from application pages:

1. Log in to your PeopleSoft application in a browser.
2. Select PeopleTools, Web Profile, Web Profile Configuration.
3. Click Search and select the Profile Name you specified during your PeopleSoft Pure Internet Architecture installation, for example, PROD.

4. On the General page in the Help URL field, enter the URL for one or more products.

You can access the URLs from the PeopleSoft Online Help Web site. Under Setting Up Context-Sensitive Help, select the link Enabling the Help Link from the Application Pages.

See PeopleSoft Online Help,

[http://docs.oracle.com/cd/E17566\\_01/epm91pbr0/eng/psbooks/EnablingtheHelpLinkfromApplicationPages.pdf](http://docs.oracle.com/cd/E17566_01/epm91pbr0/eng/psbooks/EnablingtheHelpLinkfromApplicationPages.pdf).

The URLs have the following format, where UlinkID1, UlinkID2, ...UlinkID $n$  refer to universal linking product line codes:

[http://www.oracle.com/pls/topic/lookup?id=%CONTEXT\\_ID%&ctx=UlinkID1&ctx=UlinkID2....&ctx=UlinkID \$n\$](http://www.oracle.com/pls/topic/lookup?id=%CONTEXT_ID%&ctx=UlinkID1&ctx=UlinkID2....&ctx=UlinkIDn)

The URL for the PeopleTools documentation must come before the URLs for PeopleSoft application documentation, as in this example:

[http://www.oracle.com/pls/topic/lookup?id=%CONTEXT\\_ID%&ctx=pt855pbr0&ctx=hcm92pbr7](http://www.oracle.com/pls/topic/lookup?id=%CONTEXT_ID%&ctx=pt855pbr0&ctx=hcm92pbr7)

This example shows the Web Profile Configuration page with a sample help URL for PeopleSoft PeopleTools 8.55 and PeopleSoft HCM 9.2:

Web Profile Configuration

General Security Authorized Site Virtual Addressing Cookie Rules Caching Debugging

Profile Name: PROD Save As ... View History

Description: Installation Defaults

Authentication Domain: .us.oracle.com ?

Help URL: oracle.com/pls/topic/lookup?id=%CONTEXT\_ID%&cbx=pt855pbr0&cbx=hom92pbr7 ?

Compress Responses ?

Compress Response References ?

Compress Mime Types: application/x-javascript,text/javascript,text/css,text/html ?

Compress Query ?

Save Confirmation Display Time: 3,000 Milliseconds ?

Enable Processing Message ?

Enable New Window ?

Enable Print ?

Enable PPM Agent ?

PPM Monitor Buffer Size: 51,200 KB ?

Single Thread Netscape ?

Single Thread Delay: 1,000 Milliseconds ?

Non-standard Base Path: ?

**Reports**

Enable Report Repository ?

Report Repository Path: ?

**Compress Report Output**

All Browsers ?

Exclude NetScape ?

Do Not Compress ?

Save Return to Search Notify Previous tab Next tab Add Update/Display

Web Profile Configuration General page with a sample PeopleSoft Hosted Documentation URL

5. Save and exit the Web Profile Configuration page.
6. Restart the following servers:
  - If your PeopleSoft Pure Internet Architecture (PIA) is running on Oracle WebLogic, restart the PIA and admin web servers.
  - If your PIA is running on IBM WebSphere, restart the PIA server.
  - If the Help link does not appear in the next step, it may be necessary to also stop and restart the application server.



7. Test the help functionality by clicking the Help icon on a PeopleSoft application page.

## Task 15-1-2: Setting Up F1 Help with the PeopleSoft Online Help Web Site

PeopleTools Application Designer also has context-sensitive help available through the user's F1 key. To enable this help functionality, the PeopleTools Options must be configured to access the hosted content on the PeopleSoft Online Help Web site as follows:

1. In your PeopleSoft application, select PeopleTools, Utilities, Administration, PeopleTools Options.
2. Scroll down to the Help Options group.
3. Enter the value for the F1 URL field.

Specify the URL for the PeopleSoft PeopleTools online help for your release. The URL should be similar to the following:

[http://www.oracle.com/pls/topic/lookup?id=%CONTEXT\\_ID%&ctx=pt855pbr0](http://www.oracle.com/pls/topic/lookup?id=%CONTEXT_ID%&ctx=pt855pbr0)

You can access the URL from the PeopleSoft Online Help Web site. Under Setting Up Context-Sensitive Help, select the link Enabling the Help Link from the Application Pages.

See PeopleSoft Online Help,

[http://docs.oracle.com/cd/E17566\\_01/epm91pbr0/eng/psbooks/EnablingtheHelpLinkfromApplicationPages.pdf](http://docs.oracle.com/cd/E17566_01/epm91pbr0/eng/psbooks/EnablingtheHelpLinkfromApplicationPages.pdf).

4. Save and exit the PeopleTools Options page.
5. Stop and restart the application server each time you update the help URL.
6. Open Application Designer. Press F1 to display the online help content.
7. For context-sensitive help, open an object, such as a panel or PeopleCode, then press F1.

## Task 15-2: Configuring Context-Sensitive Help with Local Installations

---

This section discusses:

- Enabling the Help Link from the Application Pages with Local Installations
- Enabling F1 Help with Local Installations
- Creating the Help Index for Multi-Product Installations

### Task 15-2-1: Enabling the Help Link from the Application Pages with Local Installations

You can configure your PeopleSoft installation so that each page in your PeopleSoft software applications includes a Help link. Clicking the Help link opens a new browser window displaying help topics that discuss that page. Use the instructions in this section to enable the Help link for locally-installed PeopleSoft Online Help only.

To enable the Help link from application pages:

1. In your PeopleSoft application, navigate to the PeopleTools, Web Profile, Web Profile Configuration page.
2. Click Search and select the Profile Name you specified during your PeopleSoft Pure Internet Architecture installation.
3. Specify the value for the Help URL field as follows:

```
http://<server_name>:<port_number>/<help_folder>/help.html?ContextID=&=&CONTEXT_ID%&LangCD=%LANG_CD%
```

---

**Note.** If you do not want the Help icon to display in your applications, clear the Help URL field value.

---

For example, if your web server is called myserver, you are using port 5080, and your *help\_folder* is pt855pbr0, the Help URL value would be:

```
http://myserver:5080/pt855pbr0/help.html?ContextID=%CONTEXT_ID%&LangCD=&=&LANG_CD%
```

- Enter your web server name for *<server\_name>*.
  - Enter the web server port for *<port\_number>*.
  - Enter the folder where you installed the help system files for *<help\_folder>*.
  - The system resolves %CONTEXT\_ID% to the page name from which you called help. The system resolves %LANG\_CD% to the signon language of the user.
4. Save and exit the Web Profile Configuration page.
  5. Before testing help functionality, purge the browser cache on the client and close all web browsers. Restart the application server and web server for PIA.
  6. Test the help functionality by clicking the Help link on a PeopleSoft application page.

## Task 15-2-2: Enabling F1 Help with Local Installations

This procedure describes how to enable F1 help for Application Designer, PeopleCode Editor, and other Microsoft Windows-based PeopleSoft programs.

To enable F1 help:

1. Sign on to your PeopleSoft application using your browser.
2. Select the PeopleTools, Utilities, Administration, PeopleTools Options page.
3. Enter the same URL as in the previous procedure (where *<server\_name>*, *<port\_number>*, and *<help\_folder>* reflect your installation) into the F1 Help URL field:

```
http://<server_name>:<port_number>/<help_folder>/help.html?ContextID=&=&CONTEXT_ID%&LangCD=%LANG_CD%
```

For example:

```
http://myserver:5080/pt855pbr0/help.html?ContextID=%CONTEXT_ID%&LangCD=&=&LANG_CD%
```

4. Save the page.

## Task 15-2-3: Creating the Help Index for Multi-Product Installations

The PeopleSoft Online Help site contains a precompiled context-sensitive help index containing all context IDs for the product family. To have the help processor deliver help pages from other product families, you need to re-create this help index to include the context IDs for all applicable product families.

Note that this procedure does not support help sites for PeopleSoft 9.1 and PeopleTools 8.52 and earlier. To include help sites for those releases, select About This help in the PeopleSoft PeopleTools product documentation.

See *Managing Locally Installed PeopleSoft Online Help*, "Including Multiple Online Help Sites for PeopleSoft 9.1 and PeopleTools 8.52 and Earlier."

To re-create the context-sensitive help index follow the instructions "Creating Index for multi-domain online help site" described in the README.txt file included with the downloaded zip files.

See *Managing Locally Installed PeopleSoft Online Help*, "Including Multiple Online Help Sites for PeopleSoft 9.2 and PeopleTools 8.53 and Later."



## Chapter 16

# Installing Software for PS/nVision Drilldowns

This chapter discusses:

- Understanding PS/nVision DrillDown Add-ins
- Installing the DrillToPIA Add-In
- Installing the nVisionDrill Add-In
- Installing the nVisionDrill Add-Ins for Multi-Language Installations
- Setting Up PeopleSoft Integration Broker for Using Web Service Capability with nVisionDrill Add-in

## Understanding PS/nVision DrillDown Add-ins

---

When you use PS/nVision to view reports, you can use the DrillDown feature to select a cell in your report and expand it according to criteria contained in a special DrillDown layout.

See *PeopleTools: PS/nVision*, "Using DrillDown."

To use the PS/nVision DrillDown feature with Microsoft Excel reports, you need to install one of the following add-ins, as described in this chapter:

---

**Note.** DrillToPIA and nVisionDrill VSTO add-ins do not coexist. You can use only one add-in at a time.

---

- DrillToPIA add-in
- nVisionDrill VSTO add-in (Visual Studio tools for Microsoft Office SE Runtime).

See *PeopleTools: PS/nVision*, "Understanding PS/nVision Reporting on the Web."

Here is the way the two drilldown add-ins work with the supported version of Microsoft Excel:

If the nVisionDrill VSTO add-in was installed, the nVisionDrill add-in runs and the nVisionDrill VSTO drilldown menu is available when Microsoft Excel opens.

Optionally, you can disable the nVisionDrill VSTO add-in and run the DrillToPIA add-in.

---

**Note.** To disable the nVisionDrill VSTO add-in and use the DrillToPIA add-in, access the Add-Ins dialog box and select the DrillToPIA check box. This selection replaces the nVisionDrill VSTO add-in with the DrillToPIA add-in, and the DrillToPIA drilldown menu appears until you reinstall the nVisionDrill VSTO add-in.

To reinstall the nVisionDrill VSTO, double-click the setup.exe file and select the Repair option.

---

## Task 16-1: Installing the DrillToPIA Add-In

---

This section discusses:

- Understanding Drilldown with DrillToPIA Add-in
- Installing the DrillToPIA Add-in on the Microsoft Excel Environment

### Understanding Drilldown with DrillToPIA Add-in

DrillDowns are run on the PS/nVision report server – like Report Requests and Report Books – and are accessible through Report Manager. You can also select to run the DrillDown using the output type of *Window*, which automatically delivers the results to a new browser window. A copy of the results will also be accessible through Report Manager.

You can drill down on individual cells within the report by selecting the cell and using Drill from the nVisionDrill menu for a Microsoft Excel report.

---

**Note.** A drilldown result report inherits the output format of its parent report. So, if the parent instance is in Excel format, then the drilldown result is in Excel format.

---

DrillDown in a web browser does not include the AutoDrill, Drill-to-Query, and Drill-to-Panel options.

### Task 16-1-1: Installing the DrillToPIA Add-in on the Microsoft Excel Environment

To drill down on Microsoft Excel reports, the Microsoft Visual Basic Application (VBA) add-in DrillToPIA.xla file needs to be installed on the Microsoft Excel environment. This file is stored in the *PS\_HOME*\Excel directory on the Application Server. Your System Administrator needs to distribute a copy of this file to all users who need to drill down on Microsoft Excel reports on the Web.

---

**Note.** If a non-English version of Microsoft Excel is used, translated versions of DrillToPIA.xla can be found in the *<PS\_HOME>*\Excel\*<Language>* directory on the Application Server.

---

In Apple Macintosh systems, PS/nVision DrillToPIA add-in launches Microsoft Internet Explorer for the drilldown page when drilling is performed on a Microsoft Excel report, regardless of the browser from which the original report is opened.

To install the add-in DrillToPIA.xla file into the Microsoft Excel environment:

1. Copy the *PS\_HOME*\Excel\DrillToPIA.xla file, and paste it into the Excel add-in directory.  
If Microsoft Office is installed in the directory *MS\_OFFICE*, the Excel add-ins directory is *MS\_OFFICE*\Office\Library.
2. Launch Microsoft Excel and select Tools, Add-ins from Excel toolbar.
3. Select the DrillToPIA option in the Add-ins dialog box.  
The nVisionDrill menu appears in the Excel menu bar.

---

**Note.** To remove the add-in from the Excel menu, clear the DrillToPIA option from the Add-Ins dialog box.

---

## Task 16-2: Installing the nVisionDrill Add-In

---

This section discusses:

- Understanding PS/nVision DrillDown Using Web Services
- Understanding Security for DrillDown Using nVisionDrill VSTO Add-in
- Installing the nVisionDrill Add-in for Microsoft Excel

### Understanding PS/nVision DrillDown Using Web Services

For PeopleSoft PeopleTools 8.50 and later releases, you are able to use the web service capability when drilling from summarized to detailed PS/nVision reports using the nVisionDrill VSTO add-in.

PeopleSoft PeopleTools supports 64-bit Microsoft Excel 2010 and Excel 2013 for the nVisionDrill VSTO add-in.

---

**Note.** During the installation for the nVisionDrill VSTO add-in, if there is a message that pre-requisites are not found, run PIARedist.exe and vstor\_redist.exe available in the *PS\_HOME\setup\nVisionDrill* folder.

---

In addition, take note of the following requirements:

- You must set up and configure Integration Broker to use the nVision Drilldown feature as a web service.  
See Setting Up Integration Broker for Using Web Service Capability with nVisionDrill Add-in.
- The web servers should be SSL enabled.  
This is because all the web service calls happen through secure channels.  
When you create the SSL-enabled web server domain, you need to provide the optional parameter Authentication Token Domain with the appropriate domain name.

---

**Note.** The new nVisionDrill VSTO add-in is mainly designed for remote standalone file drilldown (where the end user doesn't have access to the PeopleSoft Pure Internet Architecture system). For all other purposes and Web drilldown, the nVision users are still encouraged to use the DrillToPIA add-in.

---

### Understanding Security for DrillDown Using nVisionDrill VSTO Add-in

The nVisionDrill VSTO Add-in allows users to perform drilldown without having to access the PeopleSoft Pure Internet Architecture pages. This necessitates that the end users of nVisionDrill must sign in to the PeopleSoft system to be able to submit the drilldown process and access the subreports. The users of nVisionDrill VSTO add-in will be prompted to enter a user ID and password for the first time. This user ID and password are validated. If the users have access, they are taken to the menu with the list of DrillDown layouts for further drilldown operation.

When the users attempt another drilldown using the same parent report instance which is already open, the system does not prompt for the credentials, and the credentials of the first login are re-used. But for each new report instance or new drilldown report instance, the credentials must be entered again.

---

**Note.** All web service calls between the Microsoft Excel and PeopleSoft applications are SSL-enabled.

---

### Task 16-2-1: Installing the nVisionDrill Add-in for Microsoft Excel

To install the nVisionDrill VSTO add-in for Microsoft Excel:

1. Go to *PS\_HOME*\setup\nVisionDrill.
2. Run the nVisionDrillSetup.msi file.

If all required software items have been installed, the nVisionDrill add-in installation will run to success.

During the installation, if you see a message that pre-requisites are not found, run PIARedist.exe and vstor\_redist.exe available in the *PS\_HOME*\setup\nVisionDrill folder.

3. Ensure that the web server domain's SSL Root certificate is installed on the machine where the nVisionDrill VSTO add-in is installed.

The Root Certificate should be installed correctly on the default browser of the machine. For example, on Microsoft Internet Explorer 8 the SSL Root Certificate should be installed under Trusted Root Certification Authorities.

### **Task 16-3: Installing the nVisionDrill Add-Ins for Multi-Language Installations**

---

If you have a multi-language installation, first install NVisionDrillSetup.msi for English, as described above, and then install the NVisionDrillSetup\_XXX.msi for the desired languages, where the extension XXX is the three-letter language code.

See *PeopleTools: Global Technology*.

### **Task 16-4: Setting Up PeopleSoft Integration Broker for Using Web Service Capability with nVisionDrill Add-in**

---

To set up Integration Broker for using web service capability with PS/nVision DrillDown:

1. Select PeopleTools, Integration Broker, Configuration, Gateways.
2. Select the Integration Gateway ID for which the Local Gateway is enabled from the search results.

An enabled Local Gateway is marked as "Y" in the search results.



- In the URL field, enter the following value, where <machine\_name> is the Web server machine name, including the domain name, and <port> is the HTTP port number of the PeopleSoft web server:

`http://<machine_name>:<port>/PSIGW/PeopleSoftListeningConnector`

This example shows the Integration Broker Gateways page with the URL

`http://webs07.dom1.com:8000/PSIGW/PeopleSoftListeningConnector`, where webs07.dom1.com is the combined machine name and domain name, and 8000 is the HTTP port:

**Gateways**

Gateway ID: LOCAL [Inbound Gateways](#)

Local Gateway  Load Balancer

URL:  Ping Gateway

[Gateway Setup Properties](#)

Load Gateway Connectors

| Connectors |               |             |                                     | Personalize   Find    First 1-9 of 9 Last |     |
|------------|---------------|-------------|-------------------------------------|-------------------------------------------|-----|
|            | *Connector ID | Description | *Connector Class Name               | Properties                                |     |
| 1          | AS2TARGET     |             | AS2TargetConnector                  | Properties                                | + - |
| 2          | FILEOUTPUT    |             | SimpleFileTargetConnector           | Properties                                | + - |
| 3          | FTPTARGET     |             | FTPTargetConnector                  | Properties                                | + - |
| 4          | GETMAILTARGET |             | GetMailTargetConnector              | Properties                                | + - |
| 5          | HTTPTARGET    |             | HttpTargetConnector                 | Properties                                | + - |
| 6          | JMSTARGET     |             | JMSTargetConnector                  | Properties                                | + - |
| 7          | PSFT81TARGET  |             | ApplicationMessagingTargetConnector | Properties                                | + - |
| 8          | PSFTTARGET    |             | PeopleSoftTargetConnector           | Properties                                | + - |
| 9          | SMTPTARGET    |             | SMTPTargetConnector                 | Properties                                | + - |

Save Return to Search

Integration Broker Gateways page

- Click Ping Gateway.

A message appears saying "Gateway URL has changed. Existing connector information will be cleared". Click OK on this message.

You should see a message with the status ACTIVE, indicating a successful connection. Close this message.

- On the Gateways page, click the Load Gateway Connectors button to load the list of connectors, and then click Save.

If the ping is unsuccessful, check the Web server URL entered, and also make sure Pub/Sub servers are enabled in the Application Server configuration.

- Select PeopleTools, Integration Broker, Service Operations Monitor, Administration, Domain Status.
- Purge the unnecessary domains and enable the required domain.

You should be able to see at least three dispatchers under Dispatcher Status. This is required for running asynchronous requests through Integration Broker.

---

**Note.** PeopleSoft Integration Broker must process all nVision web service requests that are sent from nVisionDrill VSTO add-in, so the Local PeopleSoft Node of PeopleSoft Integration Broker gateway must include at least three dispatchers.

---

8. Select PeopleTools, Integration Broker, Configuration, Gateways.  
Select the same Integration Gateway ID that you chose in step 1.
9. On the Gateways page, select the link Gateway Setup Properties.  
The Gateways Properties page appears.
10. Enter the Integration Gateway administrator user ID and password.  
The default User ID is administrator, as shown in this example. Enter the password that you specified when setting up the PeopleSoft Pure Internet Architecture.

**Gateway Properties**

Sign on to access integrationGateway.properties file.

The default user ID is 'administrator' and the default password is 'password'.

User ID administrator

Password ●●●●●●●●●●

Change Password

OK Cancel

Gateway Properties sign on page

## 11. Add a new node in the PeopleSoft Node Configuration page.

PeopleSoft Node Configuration page

Node Name: Enter the name of the active default node.

This example uses \$NODENAME.

To find the active default node, navigate to Integration Broker, Integration Setup, Nodes. Do a search, and choose the node for which the Local Node value is "1" and the Default Local Node value is "Y".

Enter the following values to complete the page:

---

**Note.** The following information can be retrieved by pressing CTRL+J on the PeopleSoft Node Configuration page.

---

- App Server URL: Enter the application server machine name and the Jolt port.
- User ID: Enter PeopleSoft user ID
- Password: Enter the password for the PeopleSoft user ID specified in the User ID field.
- Tools Release: Provide the exact PeopleSoft PeopleTools release that your application server is using.

## 12. Click Save.

## 13. Click Ping Node to be sure the node is accessible, and then exit.

See *PeopleTools: Integration Broker Administration*.



## Chapter 17

# Installing the Web Application Deployment Tool

This chapter discusses:

- Prerequisites
- Installing the Web Application Deployment Tool on Oracle WebLogic in GUI Mode
- Installing the Web Application Deployment Tool on IBM WebSphere in GUI Mode
- Installing the Web Application Deployment Tool on Oracle WebLogic in Console Mode
- Installing the Web Application Deployment Tool on IBM WebSphere in Console Mode
- Installing the Web Application Deployment Tool in Silent Mode
- Testing and Troubleshooting the Web Application Deployment

## Prerequisites

---

This chapter includes instructions for installing the Web Application Deployment tool on Oracle WebLogic and IBM WebSphere. Complete the instructions for the web server you selected when you carried out the PeopleSoft PeopleTools installation. Typically, you would choose GUI mode for Microsoft Windows platforms and console mode for UNIX or Linux platforms.

When you install your PeopleSoft application, consult the product-specific installation guide to determine whether the Web Application Deployment tool is required. If the Web Application Deployment tool is not referenced in the product-specific installation guide, you can skip this chapter.

Before you install the Web Application Deployment tool, confirm that you have completed the following requirements.

If you use Oracle WebLogic as your web server, you must fulfill these requirements:

- Java 8 must be installed and working properly. Your PATH environment variable must include an entry for Java 8 (for example, `<java>/bin`). If you do not install Java 8 the deployment will fail due to the absence of a Java compiler.
- The PeopleSoft web server must be installed during the PeopleSoft PeopleTools installation.
- Oracle WebLogic 12.2.1 must be installed.

If you use IBM WebSphere as your web server, you must fulfill these requirements:

- Java 8 or above must be installed and working properly.
- The PeopleSoft web server must be selected for installation during the PeopleSoft PeopleTools installation.
- IBM WebSphere 9.0.0.0 must be installed. The web server must be up and running when you carry out the Web Application Deployment tool installation.
- The PeopleSoft Pure Internet Architecture must be installed on IBM WebSphere.

- If you are running on UNIX or Linux, run the Web Application Deployment installation with a user who owns IBM WebSphere, and who owns *PS\_HOME*. Here are two examples:
  - If IBM WebSphere is owned by "root" and group "system", the Web Application Deployment installation must be run with "root" and group "system."
  - If WebSphere is owned by user "wsadmin" and group "wsadmin", then the Web Application Deployment installation must be run with wsadmin and wsadmin as the user and group.

## See Also

"Installing Web Server Products"

"Setting Up the PeopleSoft Pure Internet Architecture in GUI Mode"

"Setting Up the PeopleSoft Pure Internet Architecture in Console Mode"

"Using the PeopleSoft Installer"

*PeopleTools: System and Server Administration*

*PeopleSoft Customer Relationship Management Installation*

## Task 17-1: Installing the Web Application Deployment Tool on Oracle WebLogic in GUI Mode

---


Use these instructions to install the Web Application Deployment tool on Oracle WebLogic in GUI mode.

1. Navigate to *PS\_HOME/setup/PsMpWebAppDeployInstall*.
2. Double-click on *setup.bat*.

See "Using the PeopleSoft Installer," Running the PeopleSoft Installer, for setup command options.


- 3. Click Next on the Welcome window.

The window displays the PeopleSoft PeopleTools version, which is 8.56 in this example, and includes the note: "If installing onto a Oracle WebLogic Server, make sure to shutdown any running web servers to avoid web server corruption."

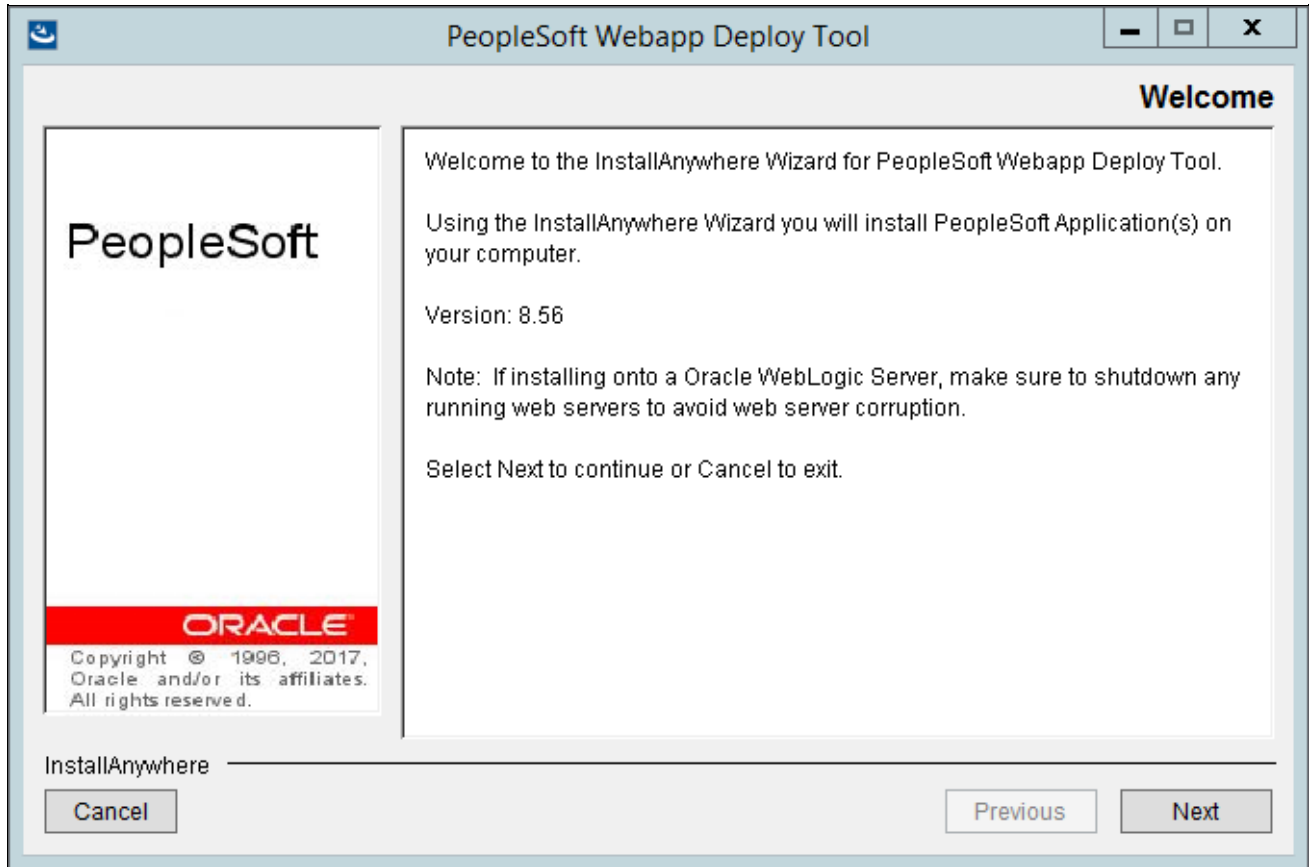

PeopleSoft Webapp Deploy Tool Welcome window


4. Enter the directory where you want to deploy the web server domain for the Web Application Deployment.  
The default directory is *PS\_CFG\_HOME*. In this example, the deployment directory is `C:\Users\psftuser\psft\pt\8.56`.

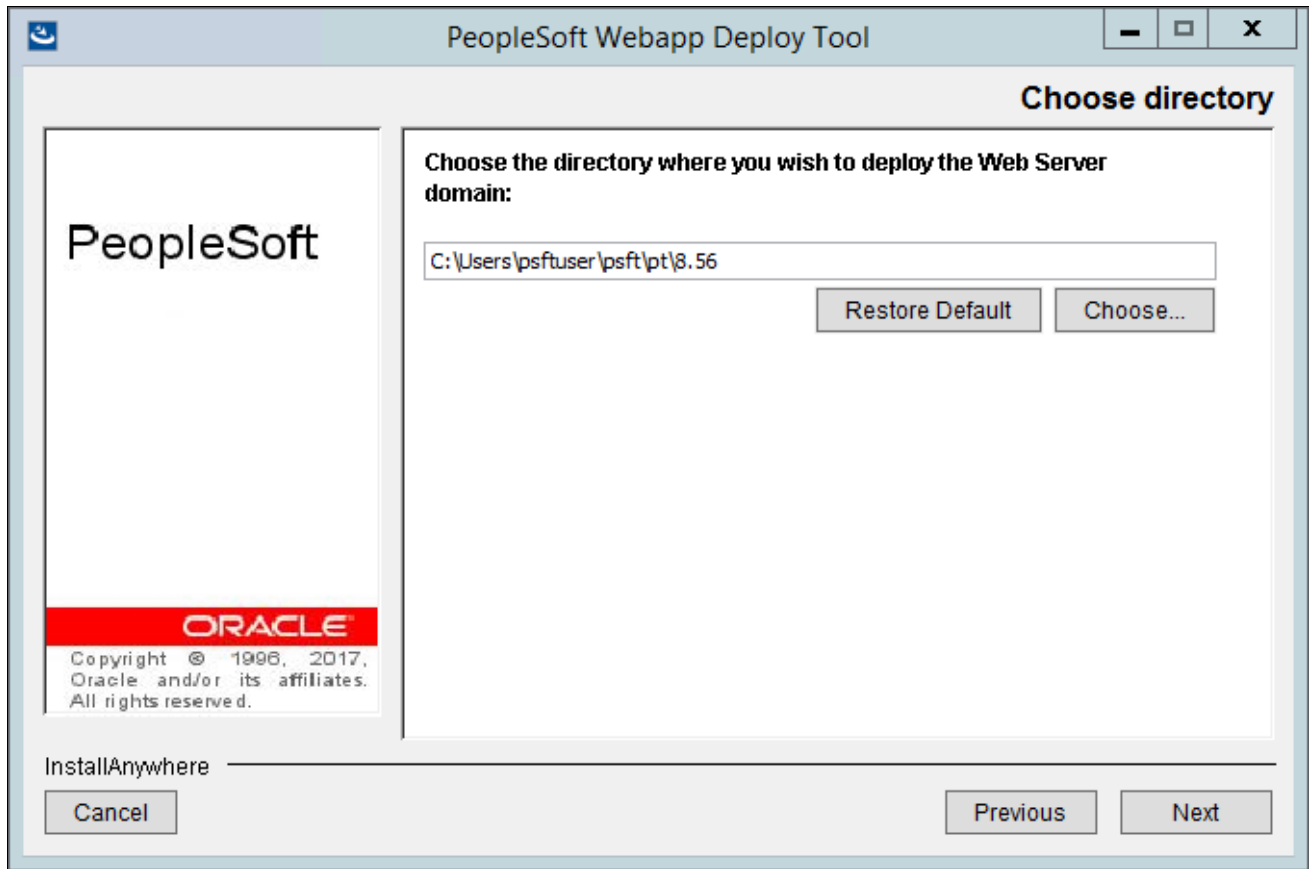

PeopleSoft Webapp Deploy Tool Choose directory window




- 5. Select Oracle Weblogic Server as the installation type, as shown in this example, and click Next.

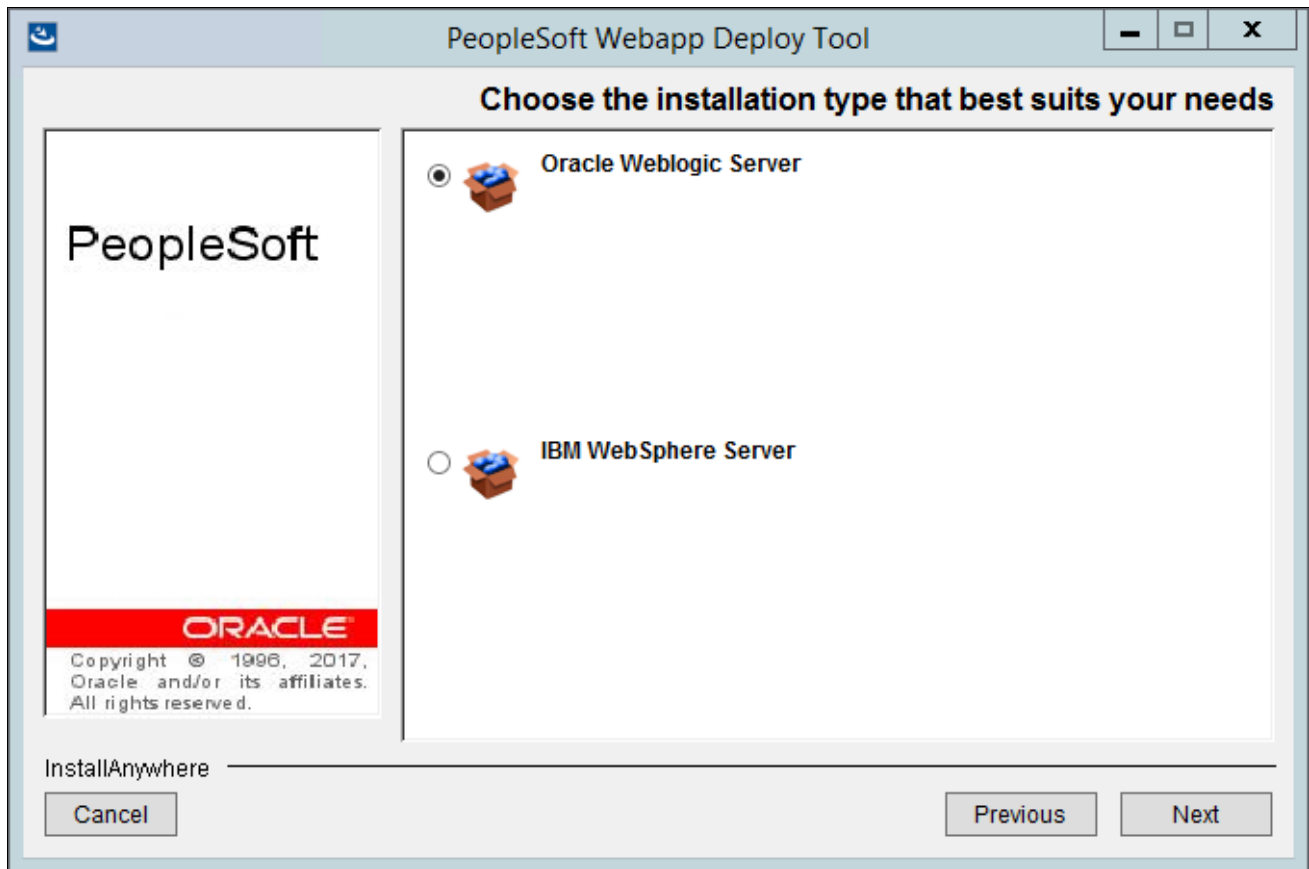

PeopleSoft Webapp Deploy Tool Choose the installation type that best suits your needs window

- 6. Specify the root directory where you installed Oracle WebLogic, and click Next.

In this example, the web server root directory for Oracle WebLogic 12.2.1 is C:\WLS1221.

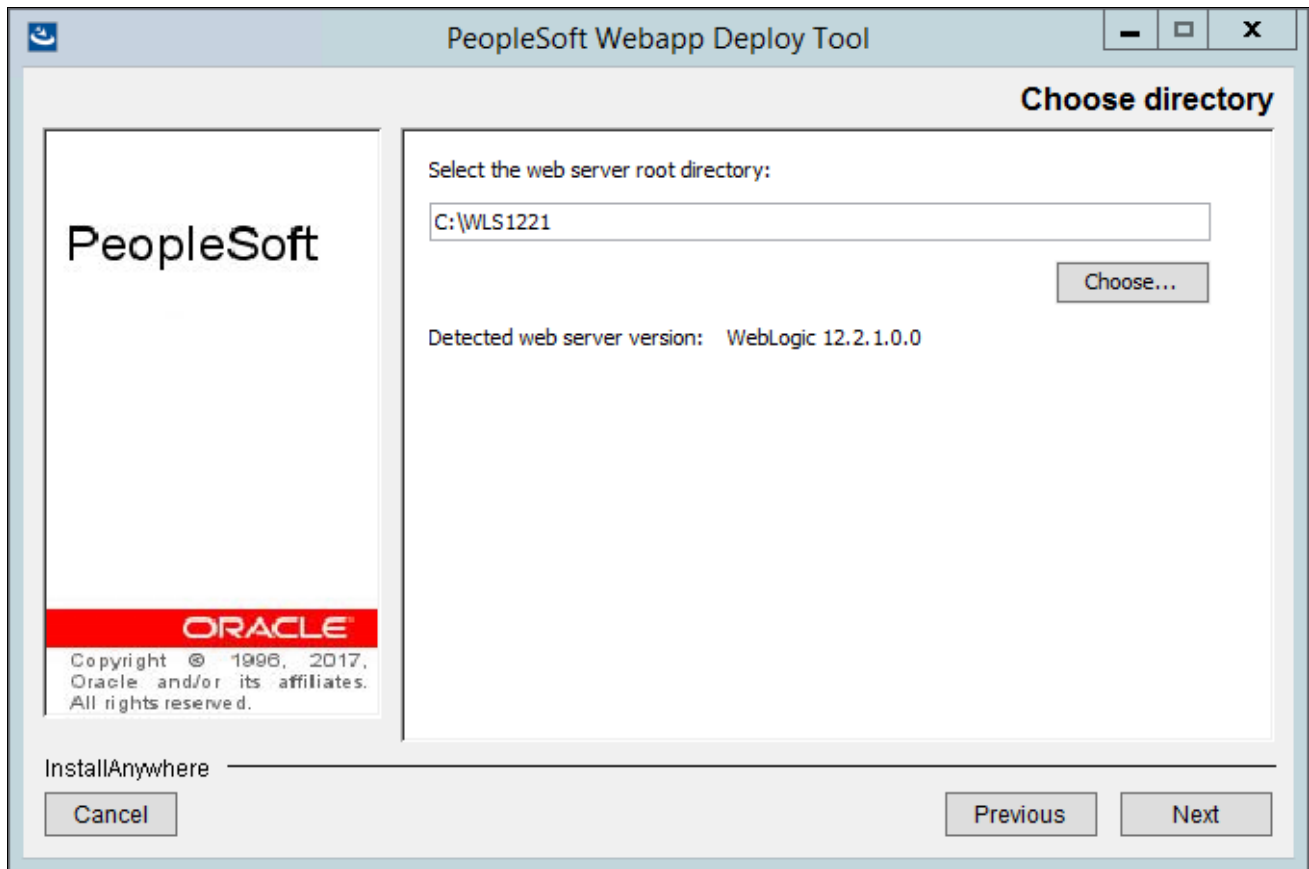


PeopleSoft Webapp Deploy Tool Choose directory window

- 7. Enter a name for the Web Application Deployment domain, or accept the default name, PSWebApp, as shown in this example.

Use a fully qualified domain name, and do not use an IP address. Click Next to continue.


**Important!** The domain that you create for the Web Application Deployment cannot be the same as any existing PeopleSoft Pure Internet Architecture domains. Be sure you do not enter a name that you used for a PeopleSoft Pure Internet Architecture domain.

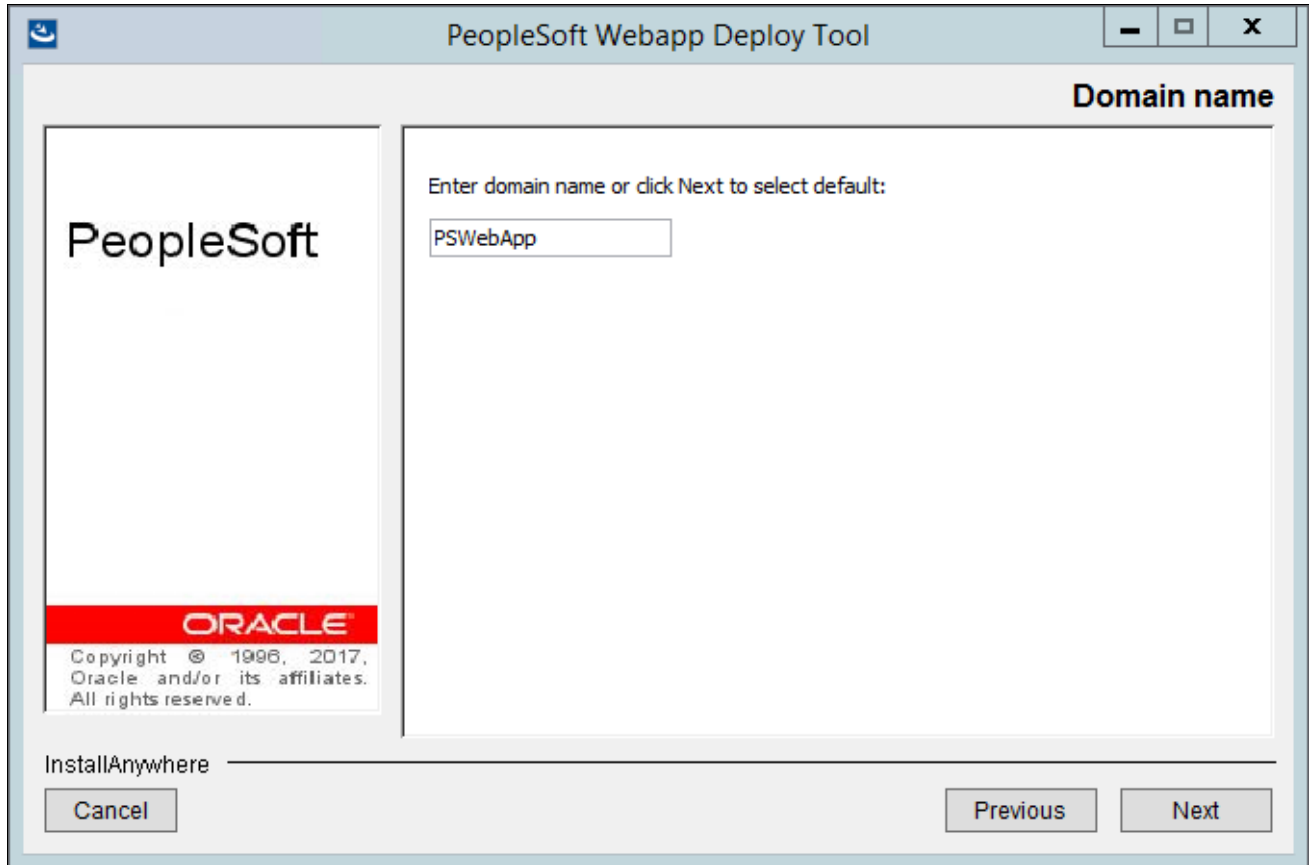

PeopleSoft Webapp Deploy Tool Domain name window

8. Enter the login ID and enter the password twice for the new web server domain that you are creating, and then click Next to continue.

**Note.** The default login ID is system, as shown on this example. The password, which you specified during the PeopleSoft Pure Internet Architecture setup, must be at least 8 alphanumeric characters with at least one number or special character.

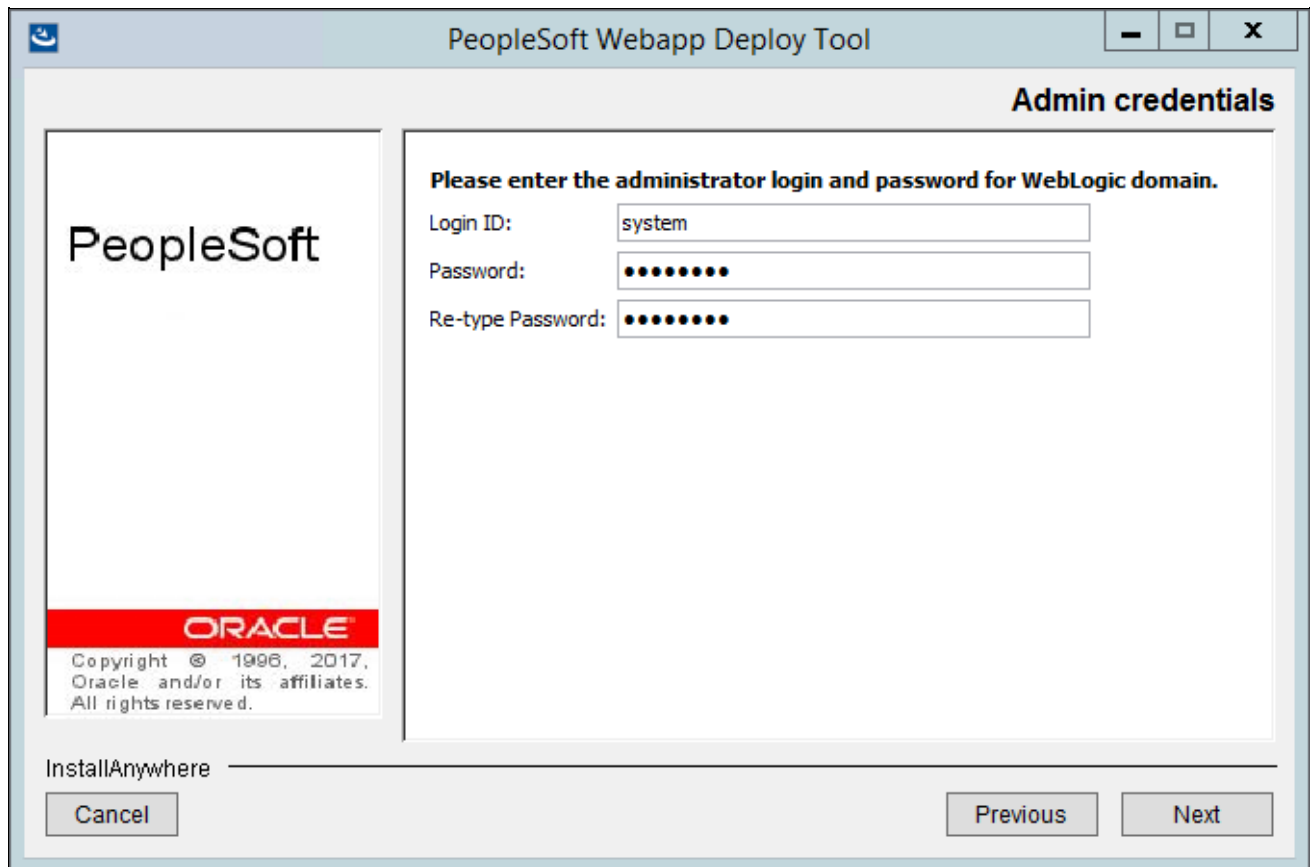


The screenshot shows a window titled "PeopleSoft Webapp Deploy Tool" with a subtitle "Admin credentials". On the left, there is a PeopleSoft logo and the Oracle logo with the text "Copyright © 1998, 2017, Oracle and/or its affiliates. All rights reserved." Below this is the text "InstallAnywhere". On the right, there is a form with the instruction "Please enter the administrator login and password for WebLogic domain." The form contains three input fields: "Login ID:" with the value "system", "Password:" with eight dots, and "Re-type Password:" with eight dots. At the bottom of the window, there are three buttons: "Cancel", "Previous", and "Next".

PeopleSoft Webapp Deploy Tool Admin credentials window

9. Select the configuration from the options Single Server Domain, Multi Server Domain, or Distributed Manager Server.

In this example the Single Server Domain option is selected.

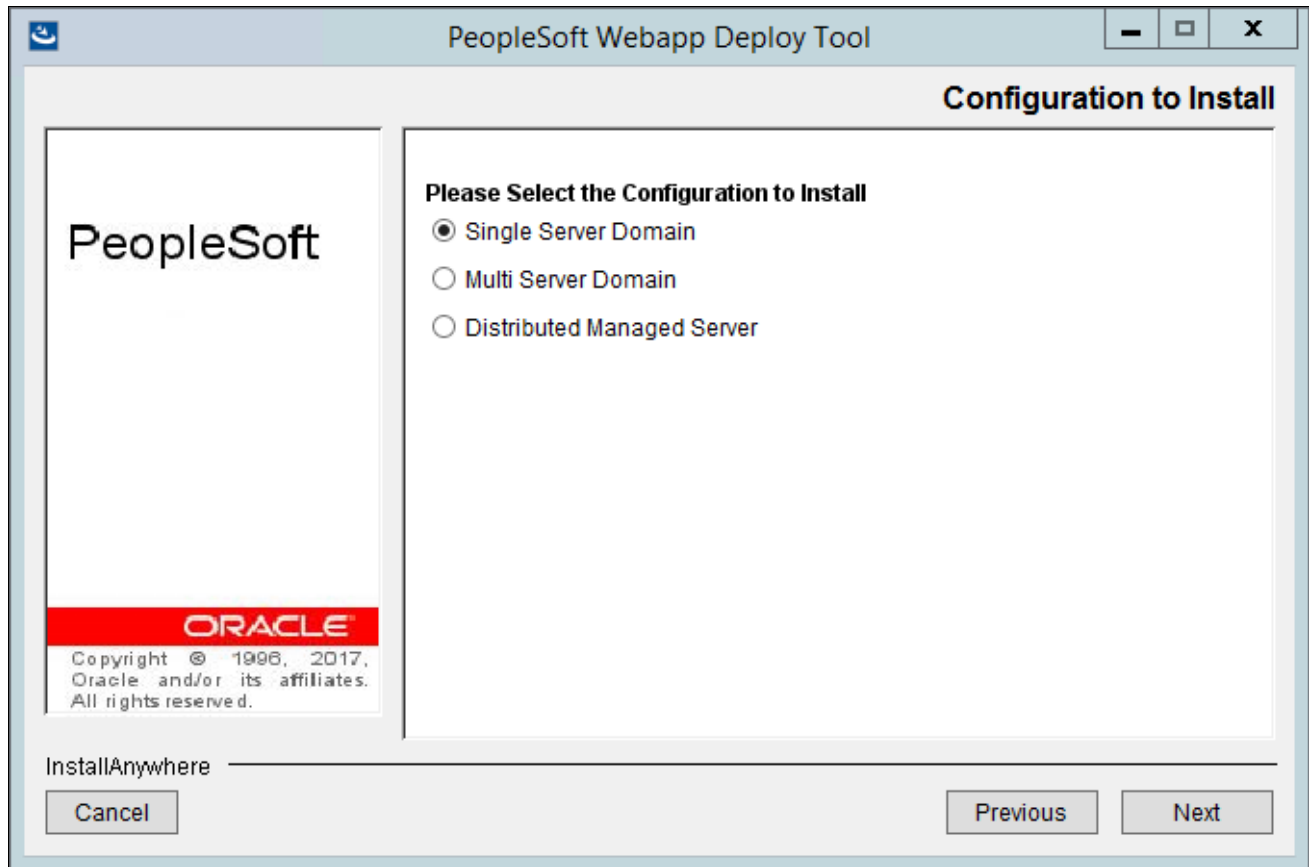


PeopleSoft Webapp Deploy Tool Configuration to Install window

- *Single Server Domain*  
This configuration is intended for single user or very small scale, non-production environments.
- *Multi-Server Domain*  
This configuration is intended for a production environment.
- *Distributed Managed Server*  
This option is an extension of the Multi-Server Domain selection and installs the necessary files to boot a managed server. This option requires a Multi Server installation to be performed to some other location, which will contain the configuration for this managed server.

10. Enter the *PS\_APP\_HOME* directory that you specified when you installed the PeopleSoft application software using the PeopleSoft PeopleTools installer.


In this example, *PS\_APP\_HOME* is C:\CRM9.2.

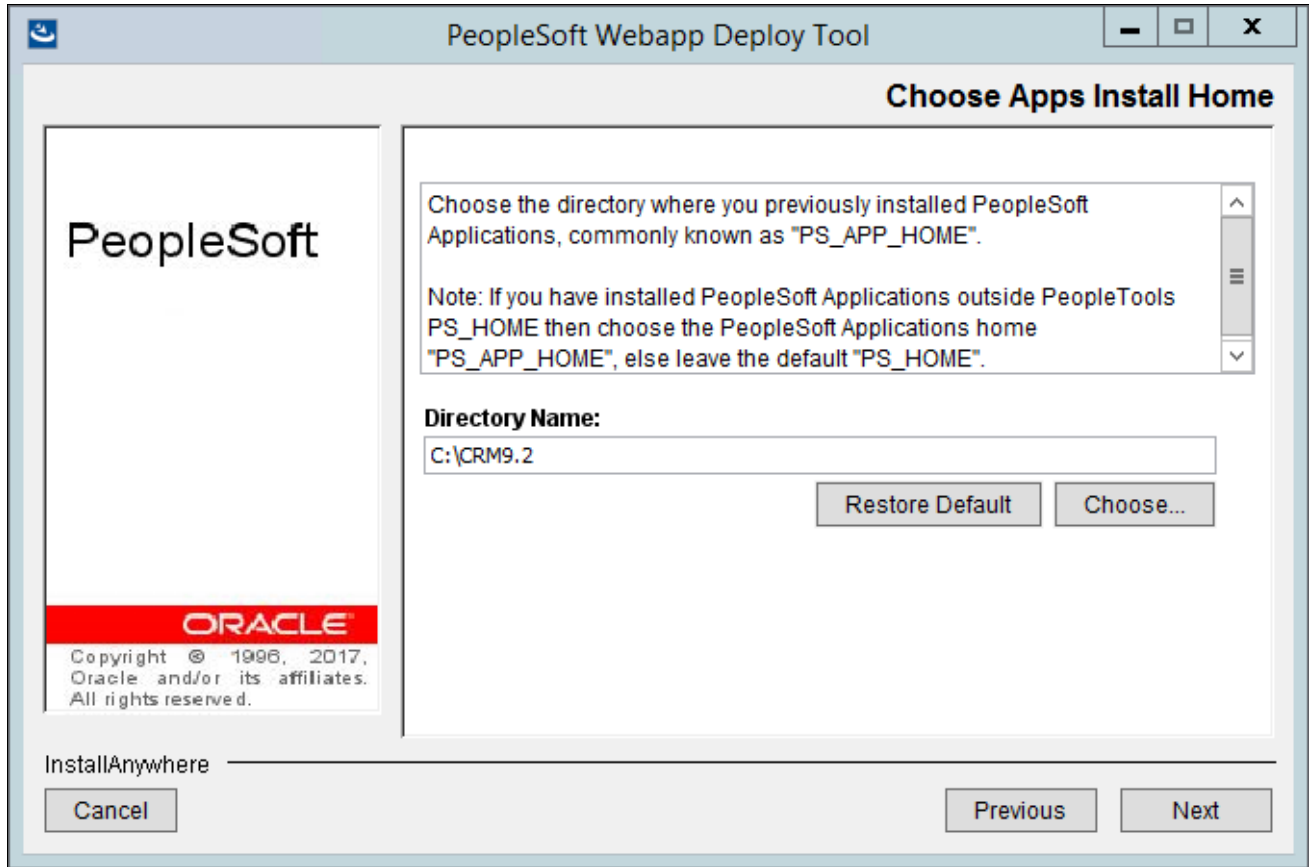

PeopleSoft Webapp Deploy Tool Choose Apps Install Home window

11. The next window lists all of the available application packages (EAR files).

Select the packages you want to install. *You must select at least one application package from the list.* In this example the CRM OMK package is selected.

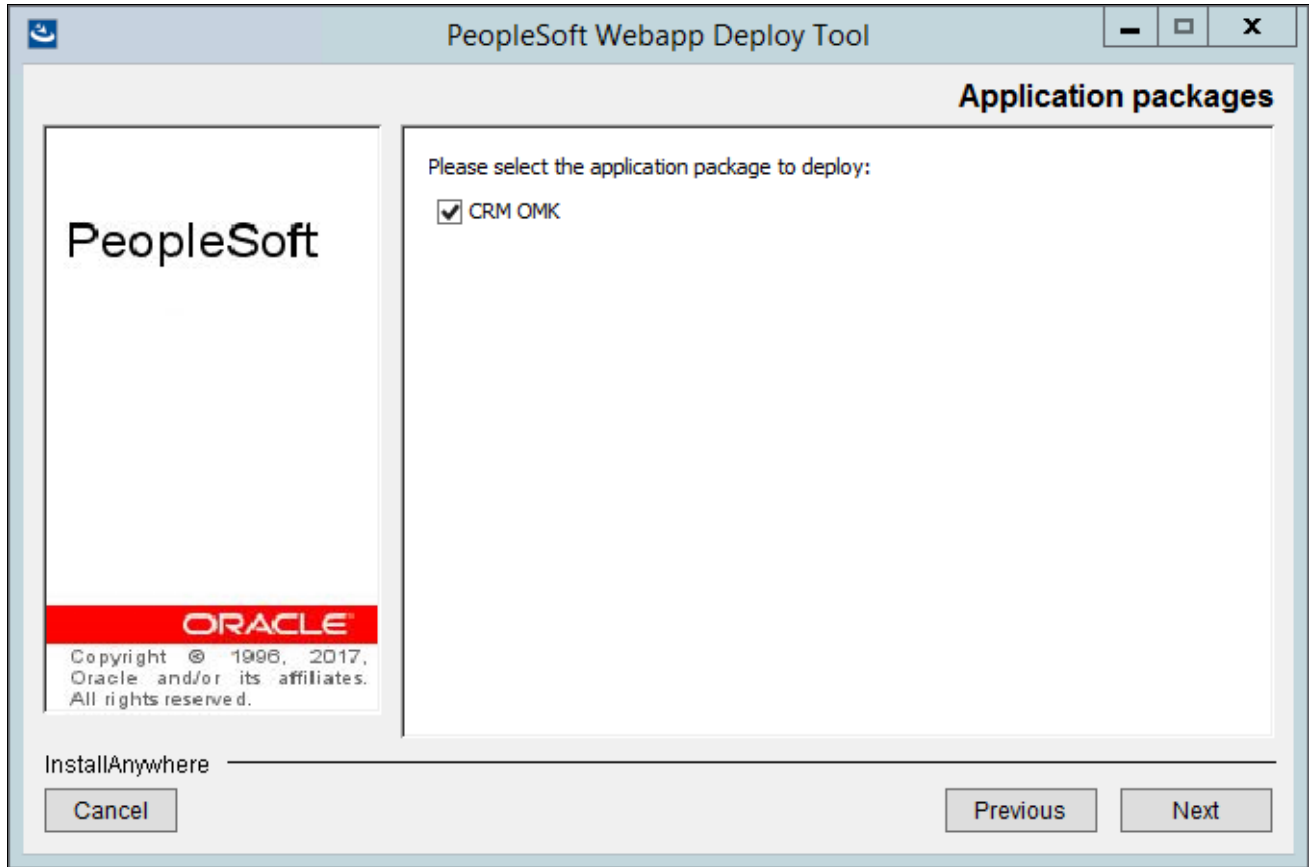

PeopleSoft Webapp Deploy Tool Application packages window

12. If the application(s) you selected requires additional information, a window appears with entry fields for the required information.

PeopleSoft Webapp Deploy Tool CRM DB information window

PeopleSoft Webapp Deploy Tool CRM DB information window


The information required for the application in this example includes:

- Database Type  
Enter the RDBMS type, which is DB2UNIX (DB2/LUW) in the example.
- Database Server Name  
Enter the name of the machine that is hosting the database, which is SERVER1 in the example.
- Database Port Number  
Consult with your database administrator for the correct port number. The port number shown in the example is 1433.
- Database Instance Name  
Enter the database name, which is CRMDMO in the example.
- Database User Name  
Enter the user name for the database.
- Database User Password



13. Enter HTTP and HTTPS port numbers, and then click Next to continue.


Do not use the same values that you used for the HTTP and HTTPS ports when setting up the PeopleSoft Pure Internet Architecture. This example shows the default numbers; 80 for the HTTPPort and 443 for the HTTPSPort.

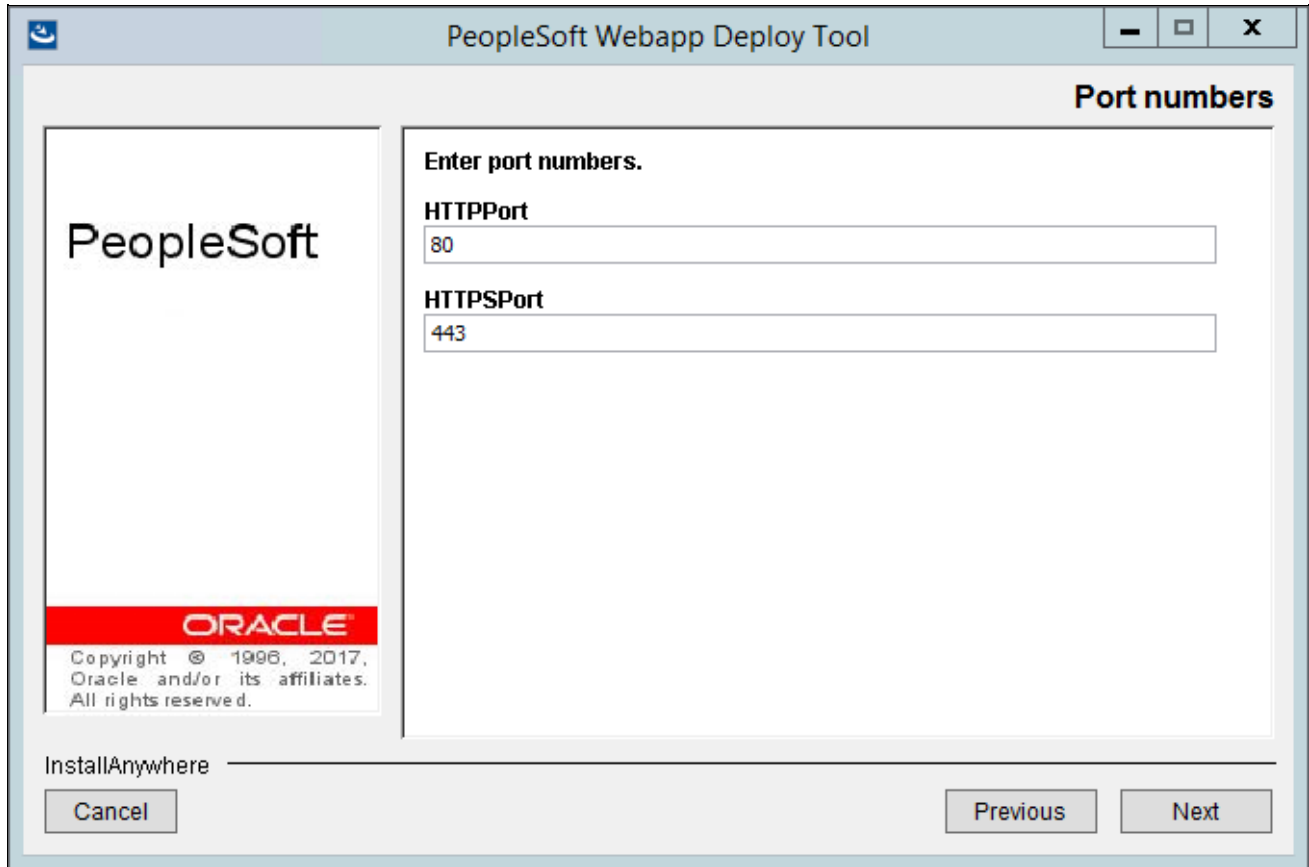

PeopleSoft Webapp Deploy Tool Port numbers window

14. Verify your installation information, such as web server information, HTTP and HTTPS port, and application deployment package, on the summary screen that appears, as shown in this example.

Click Install to begin the installation, Previous to go back to make changes on an earlier window, or Cancel to exit the installation.

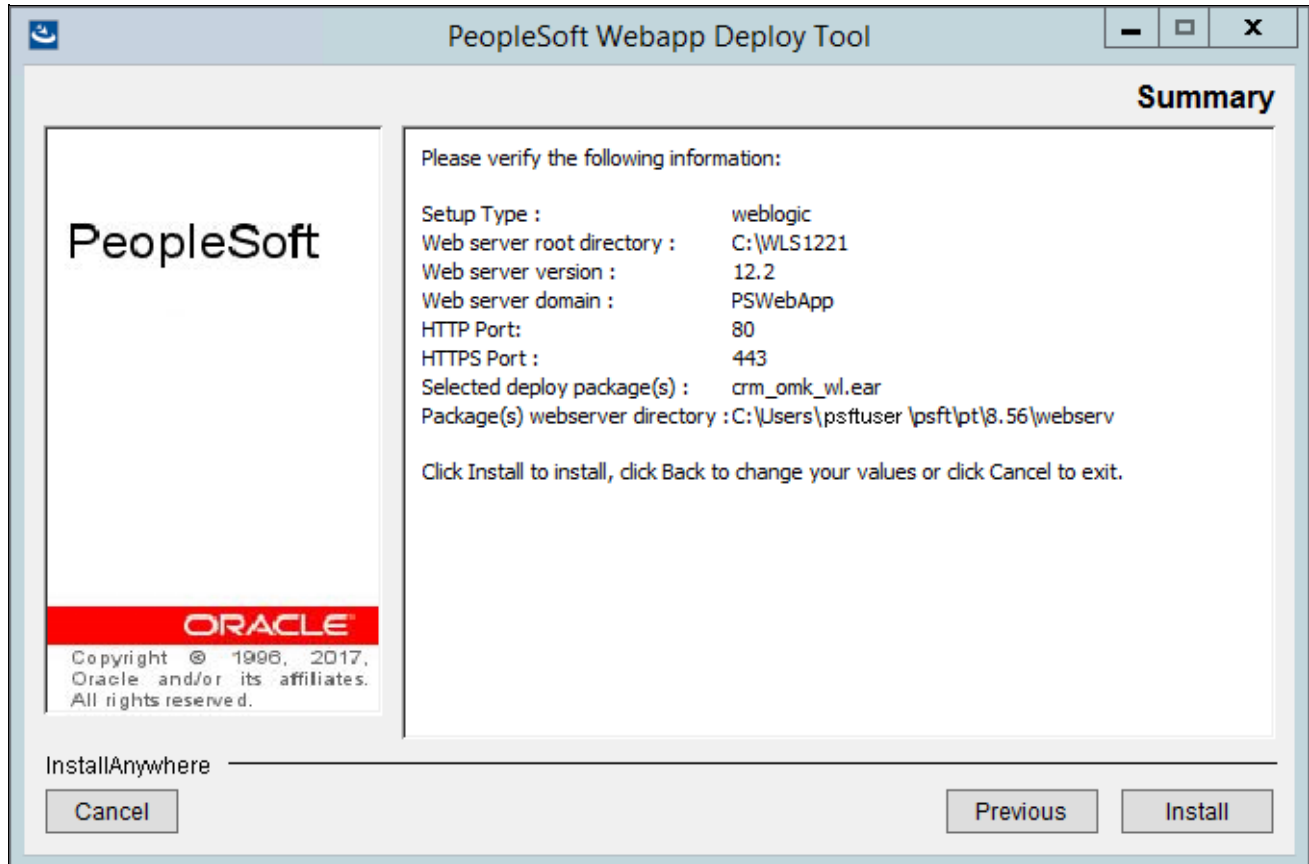


PeopleSoft Webapp Deploy Tool Summary window

15. A confirmation screen appears, which displays the installation location, `C:\Users\psftuser\psft\pt\8.56\webserv` in this example, when the installation completes.

The Web Application Deployment tool is deployed to the `webserv\<domain_name>` folder in the installation location. For example, for the default domain PSWebApp, this would be `C:\Users\psftuser\psft\pt\8.56\webserv\PSWebApp`.

Click Done to exit.

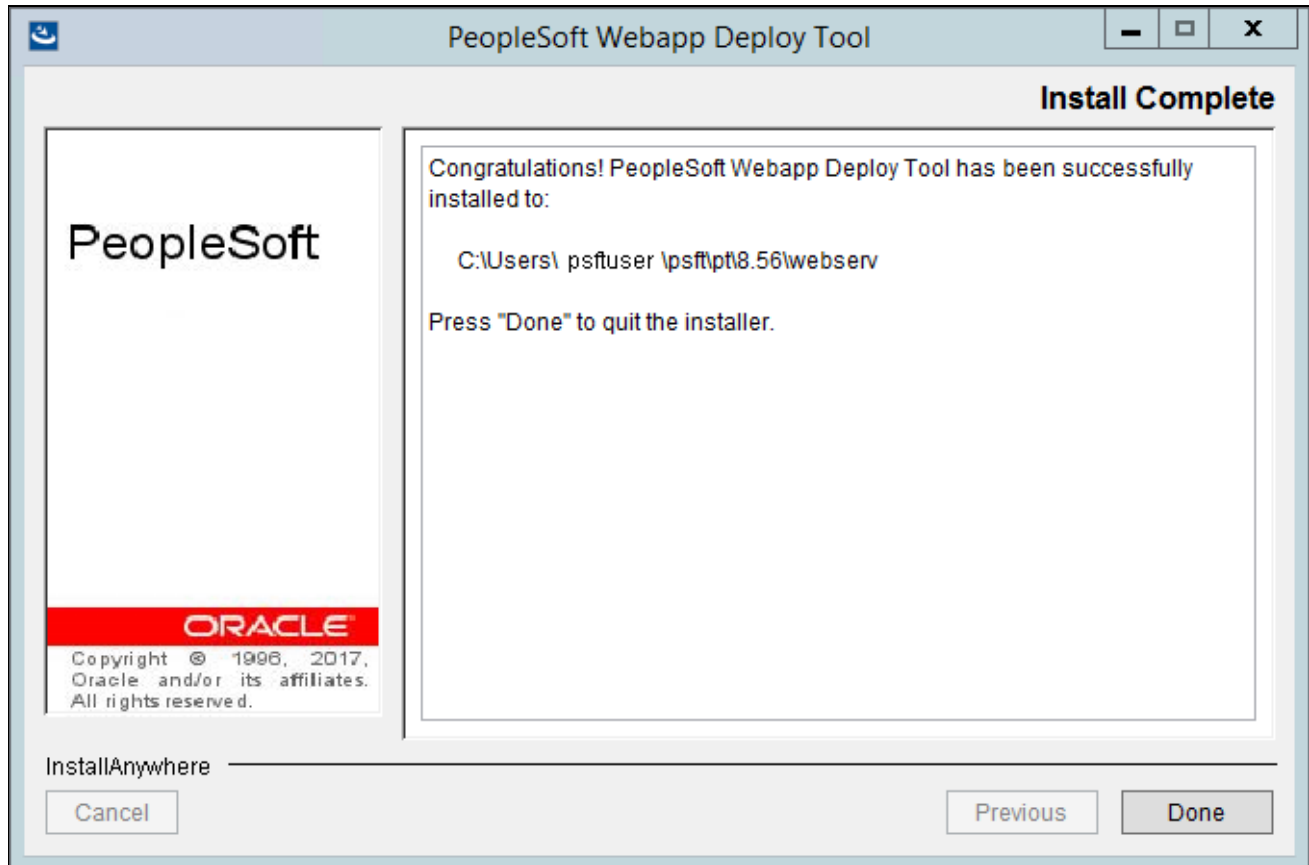

PeopleSoft Webapp Deploy Tool Install Complete window

## Task 17-2: Installing the Web Application Deployment Tool on IBM WebSphere in GUI Mode

Use these instructions to install the Web Application Deployment tool on IBM WebSphere in GUI mode.

1. Start WebSphere on the server on which you plan to deploy the Web Application Deployment tool.
  - a. On Microsoft Windows 2012 R2, access the Apps screen and locate the First steps utility in the IBM WebSphere category.

Use the `<profile_name>` that you created for the PeopleSoft Pure Internet Architecture installation.

See "Setting Up the PeopleSoft Pure Internet Architecture in GUI Mode," Testing and Administering the PeopleSoft Pure Internet Architecture.

- b. Select the link Start the server.
2. Navigate to `PS_HOME\setup\PsMpWebAppDeployInstall`.

3. Double-click on `setup.bat`.

See "Using the PeopleSoft Installer," Running the PeopleSoft Installer, for setup command options.


4. Click Next on the Welcome window.

The window includes the PeopleSoft PeopleTools version number, which is 8.56 in this example.

---

**Note.** The window also includes a message to shut down running Oracle WebLogic servers.


---

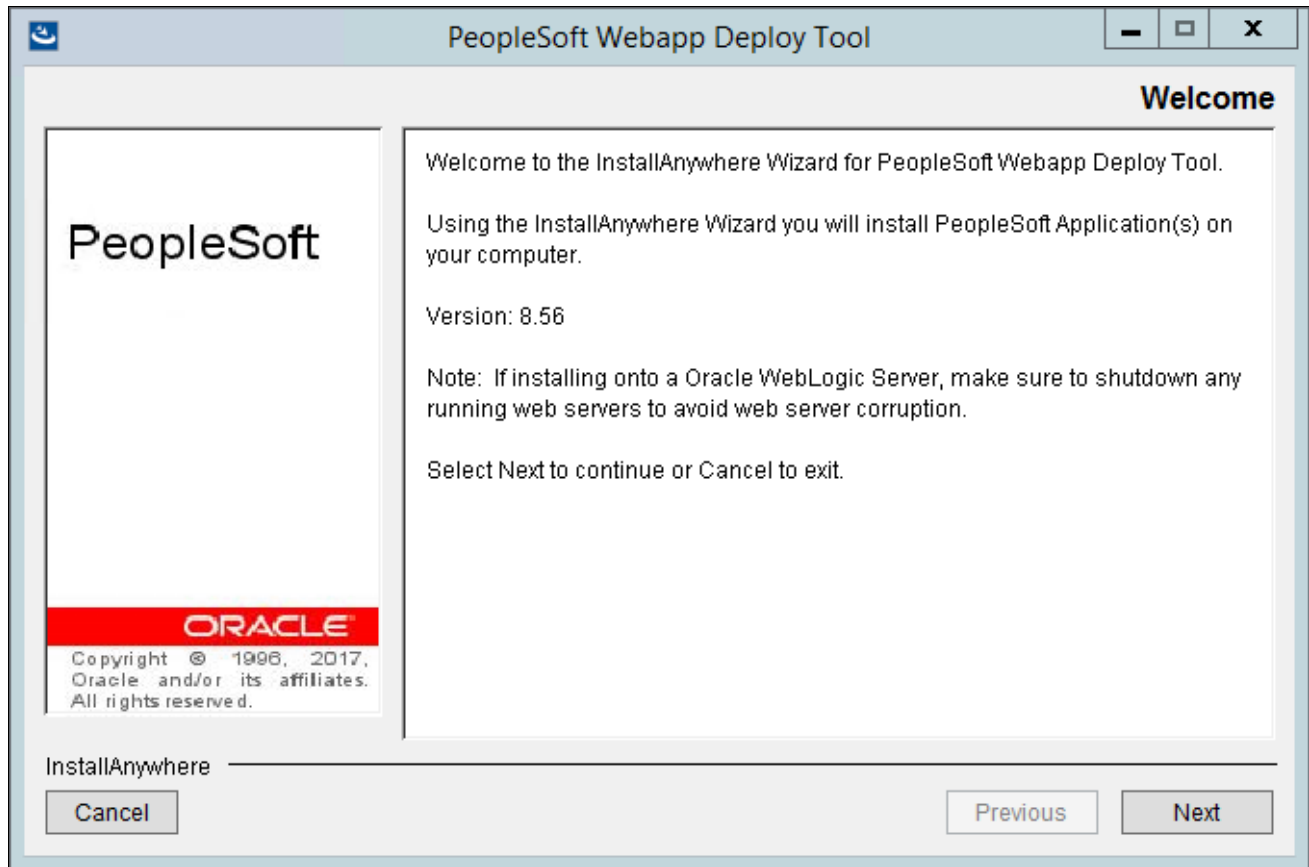

PeopleSoft Webapp Deploy Tool Welcome window


- 5. Enter the directory where you want to deploy the domain for the Web Application Deployment, and then click Next.

The default directory is *PS\_CFG\_HOME*. In this example, the deployment directory is *C:\Users\psftuser\psft\pt\8.56*.

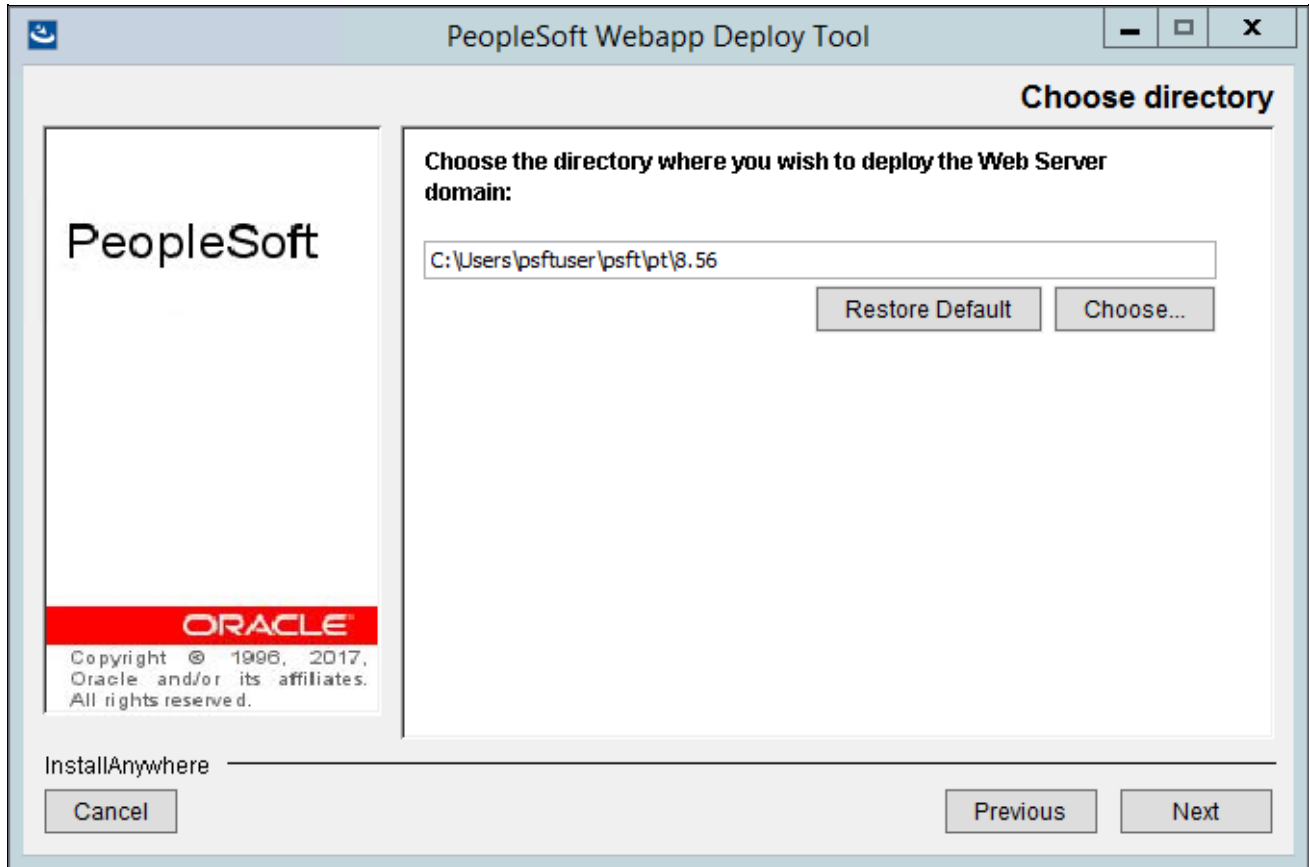


PeopleSoft Webapp Deploy Tool Choose directory window

6. Select IBM WebSphere Server, as shown in this example, and click Next.

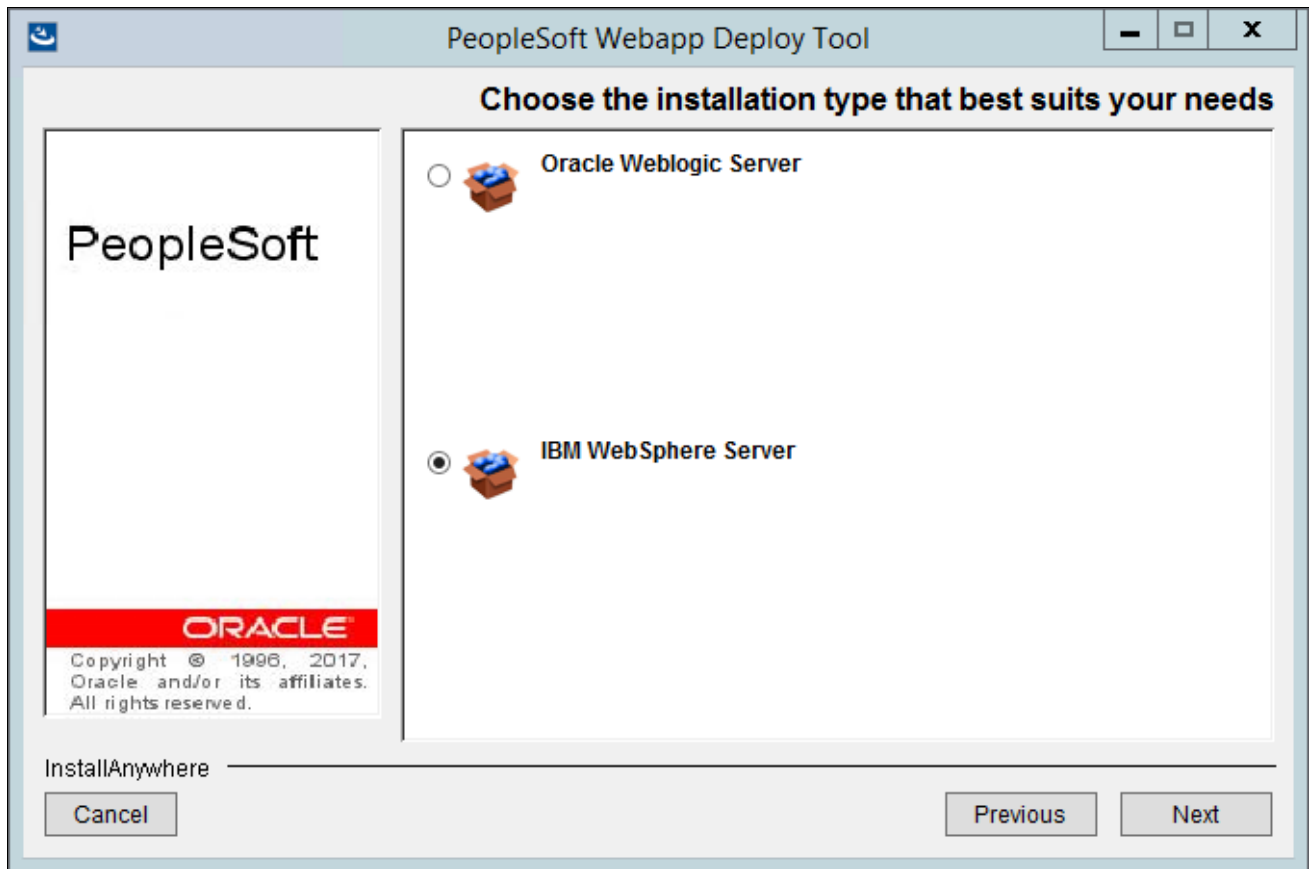

PeopleSoft Webapp Deploy Tool Choose the installation type that best suits your needs window

- 7. Specify the root directory where you installed the IBM WebSphere Application server.  
In this example, the root directory is C:\IBM\WebSphere\AppServer.

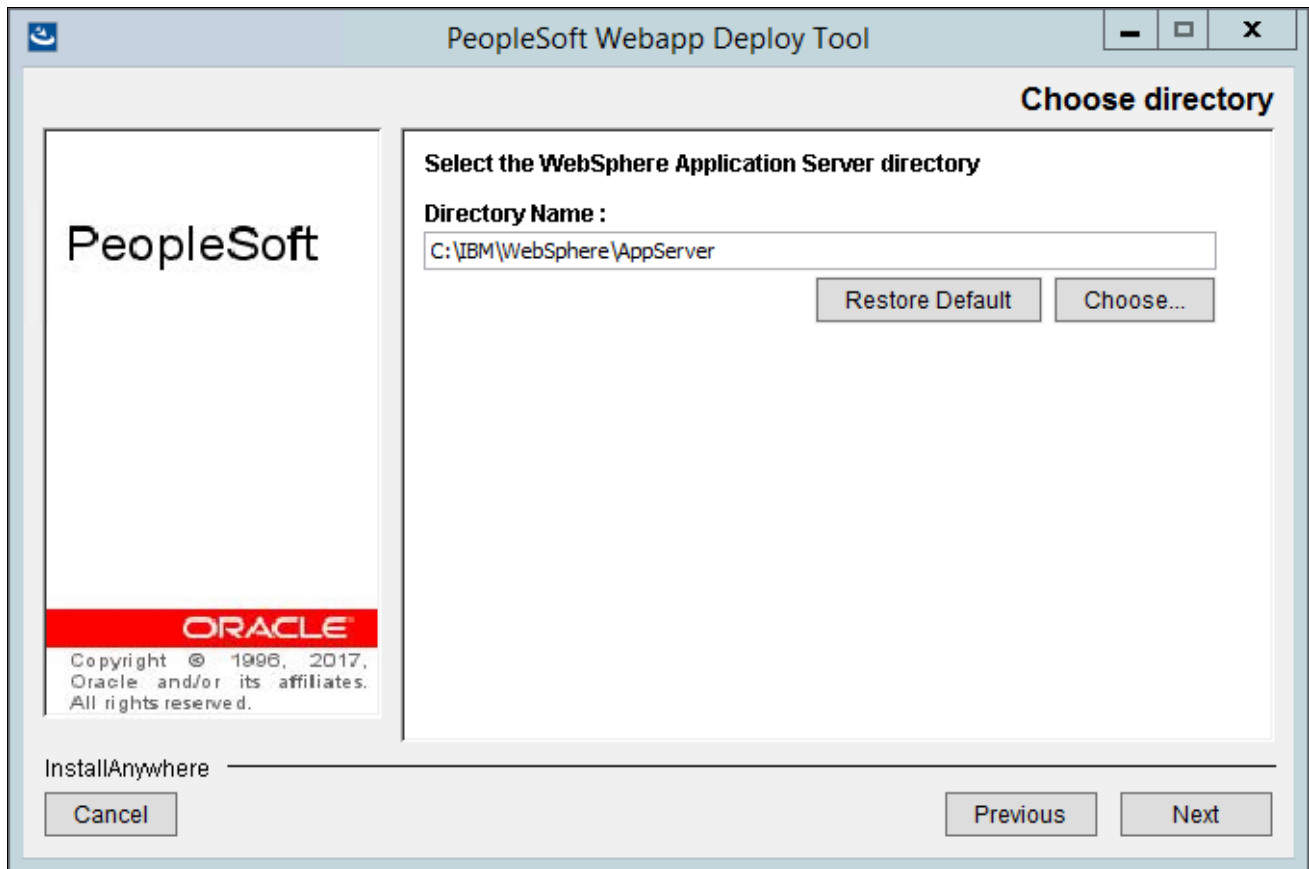

PeopleSoft Webapp Deploy Tool Choose directory window

---


**Note.** If the web server on which you are installing the Web Application Deployment tool is not up and running, you receive an error message at this point instructing you to start your web server.

---

See "Setting Up the PeopleSoft Pure Internet Architecture in GUI Mode," Testing and Administering the PeopleSoft Pure Internet Architecture Installation.

8. Enter the login ID and enter the password twice for the new web server domain that you are creating, and then click Next to continue.

The default login ID, as shown in this example, is system. The password, which you specified during the PeopleSoft Pure Internet Architecture setup, must be at least 8 alphanumeric character with at least one number or special character.

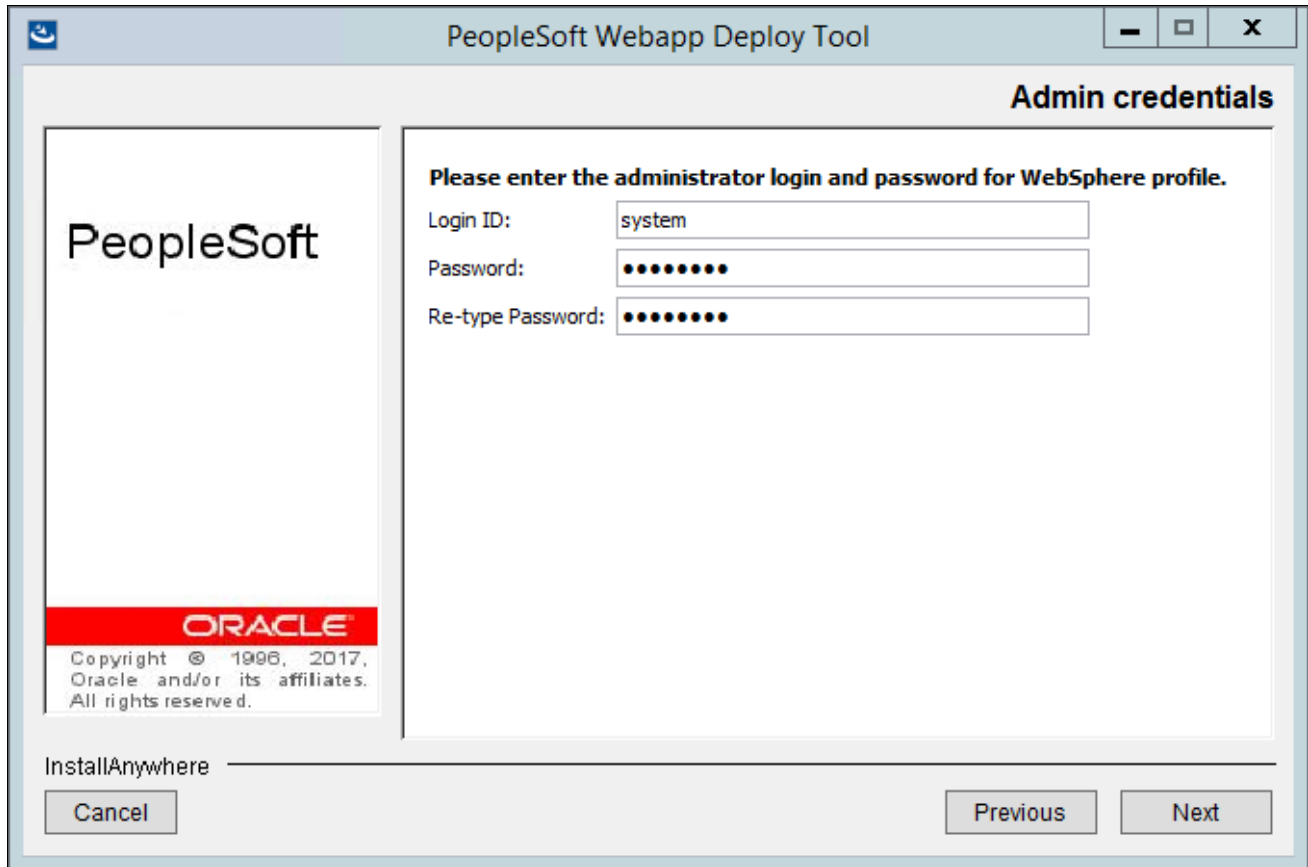

The screenshot shows a window titled "PeopleSoft Webapp Deploy Tool" with a standard Windows title bar. The main content area is titled "Admin credentials" and contains the following elements:

- A large "PeopleSoft" logo on the left side.
- An "ORACLE" logo in a red box at the bottom left, with the text "Copyright © 1996, 2017, Oracle and/or its affiliates. All rights reserved." below it.
- A heading: "Please enter the administrator login and password for WebSphere profile."
- Three input fields:
  - "Login ID:" with the text "system" entered.
  - "Password:" with eight dots representing a masked password.
  - "Re-type Password:" with eight dots representing a masked password.
- At the bottom left, the text "InstallAnywhere" is followed by a "Cancel" button.
- At the bottom right, there are "Previous" and "Next" buttons.


PeopleSoft Webapp Deploy Tool Admin credentials window



- 9. Enter a name for the Web Application Deployment domain, or accept the default name, PSWebApp, as in this example.

Use a fully qualified domain name, and do not use an IP address. Click Next to continue.


**Important!** The domain that you create for the Web Application Deployment cannot be the same as any existing PeopleSoft Pure Internet Architecture domains. Be sure you do not enter a name that you used for a PeopleSoft Pure Internet Architecture domain.

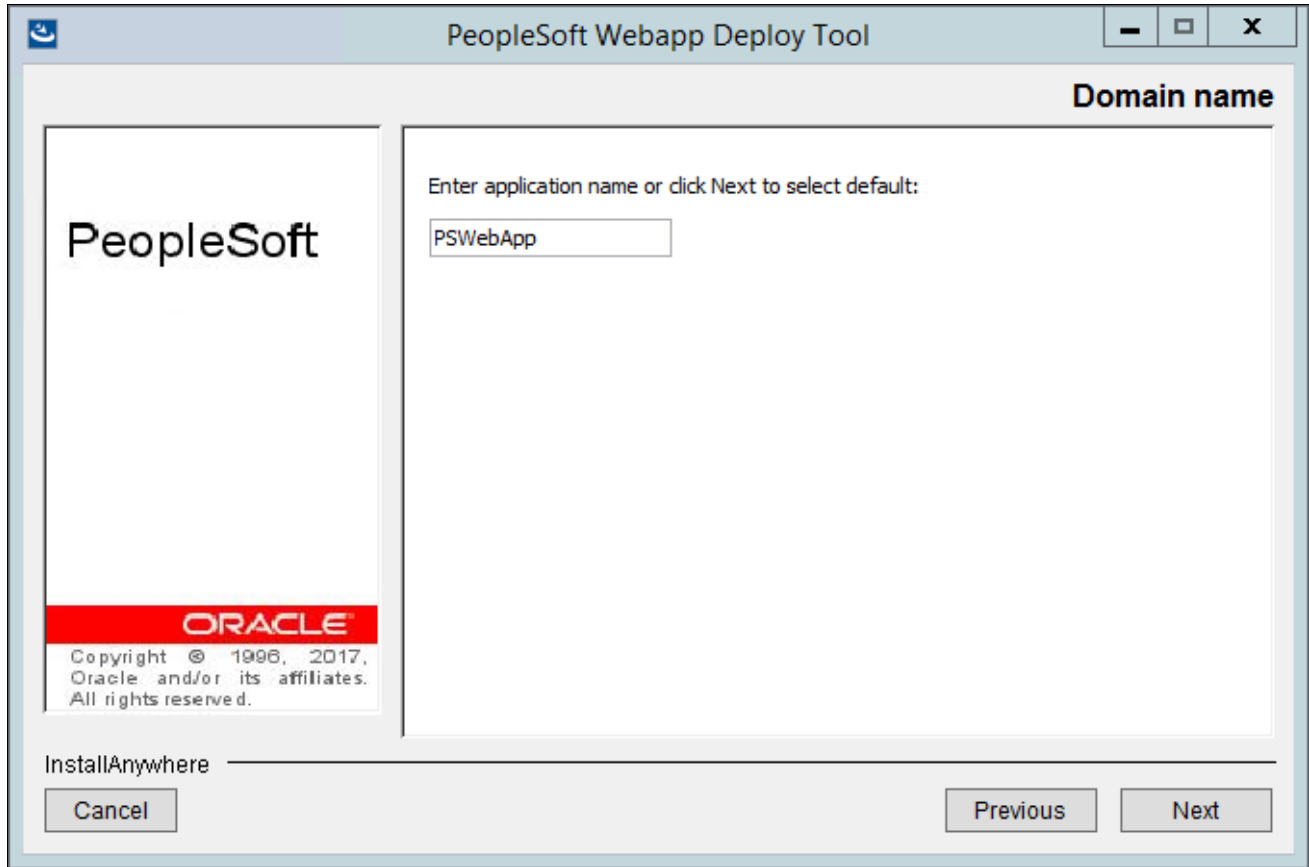

PeopleSoft Webapp Deploy Tool Domain name window

10. Enter the *PS\_APP\_HOME* directory that you specified when you installed the PeopleSoft application software using the PeopleSoft PeopleTools installer.


In this example, *PS\_APP\_HOME* is C:\CRM92.

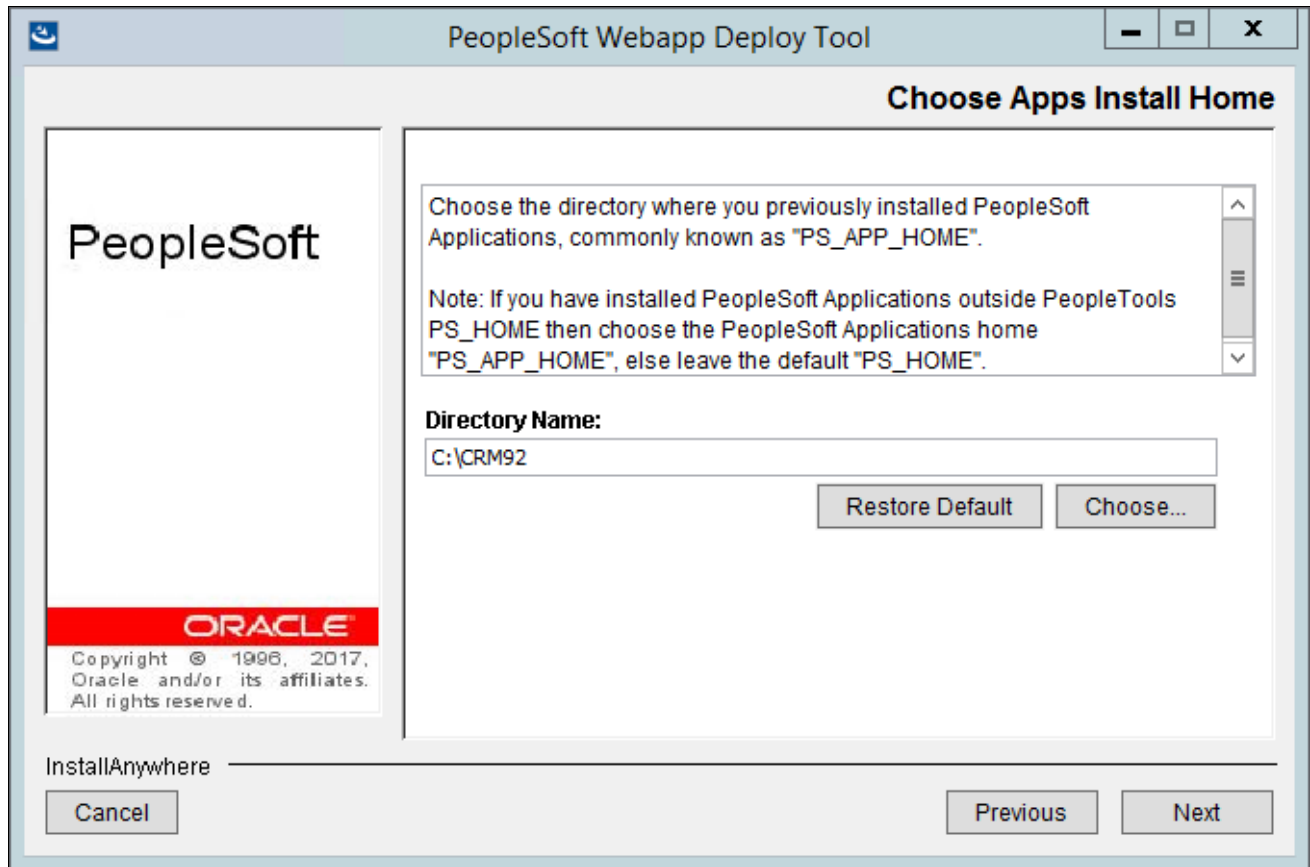

PeopleSoft Webapp Deploy Tool Choose Apps Install Home window

- 11. The next window lists all of the available application packages (EAR files). Select the packages you want to install.

*You must select at least one application package from this list. In this example, the application package CRM OMK is selected.*

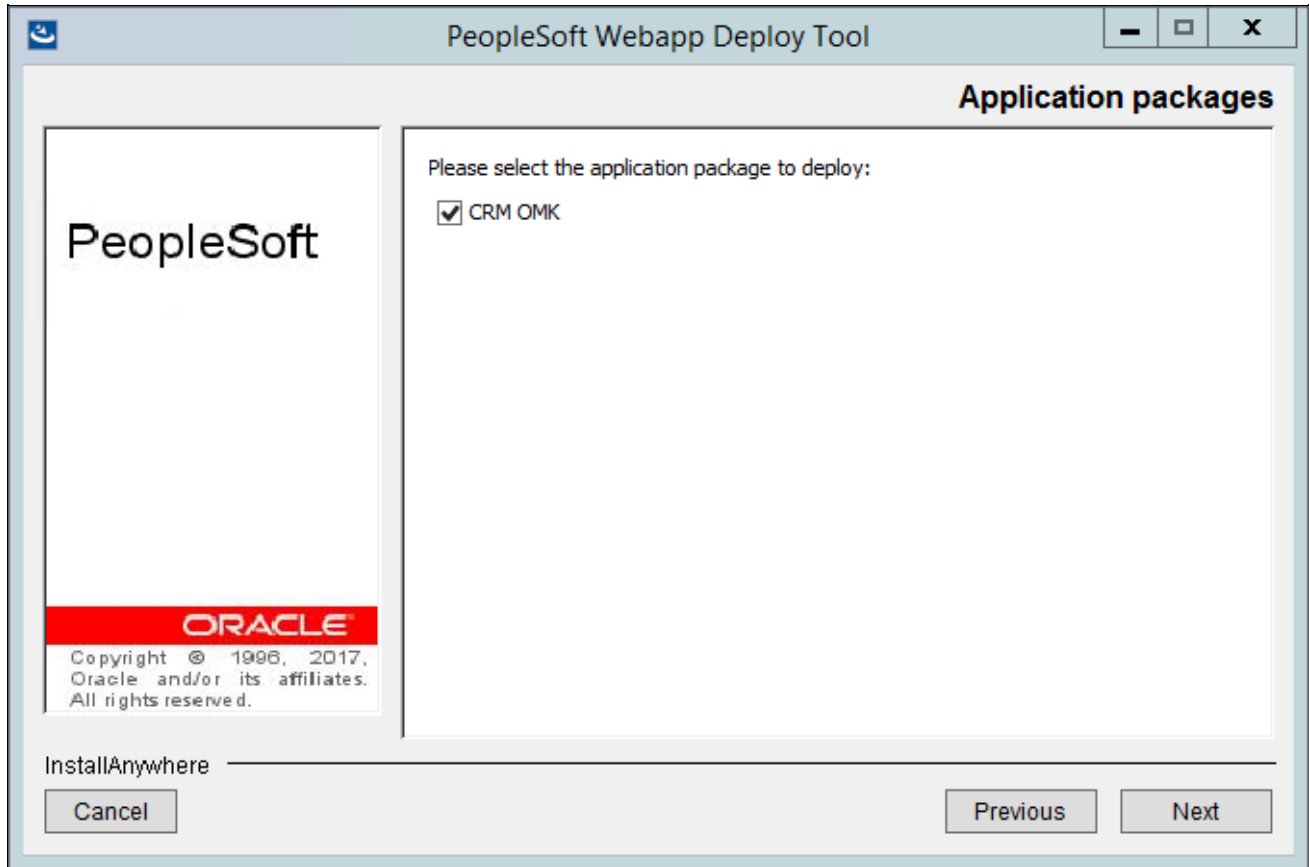

PeopleSoft Webapp Deploy Tool Application packages window

12. If the application(s) you selected in the previous step requires additional information, a window appears with entry fields for the required information.


PeopleSoft Webapp Deploy Tool CRM DB information window

In this example, the required information includes:

- Database Type  
Enter the RDBMS type; the example uses DB2UNIX.
- Database Server Name  
Enter the name of the machine that is hosting the database, SERVER1 in the example.
- Database Port Number  
Consult with your database administrator for the correct port number. The port number shown in the example is 1433.
- Database Instance Name  
Enter the database name, which is CRDMO in the example.
- Database User Name  
Enter the user name for the database.
- Database User Password  
Enter the password for the database user.

13. Enter HTTP and HTTPS port numbers, and then click Next to continue.


This example shows the default port numbers for HTTP = 80 and HTTPS = 443.

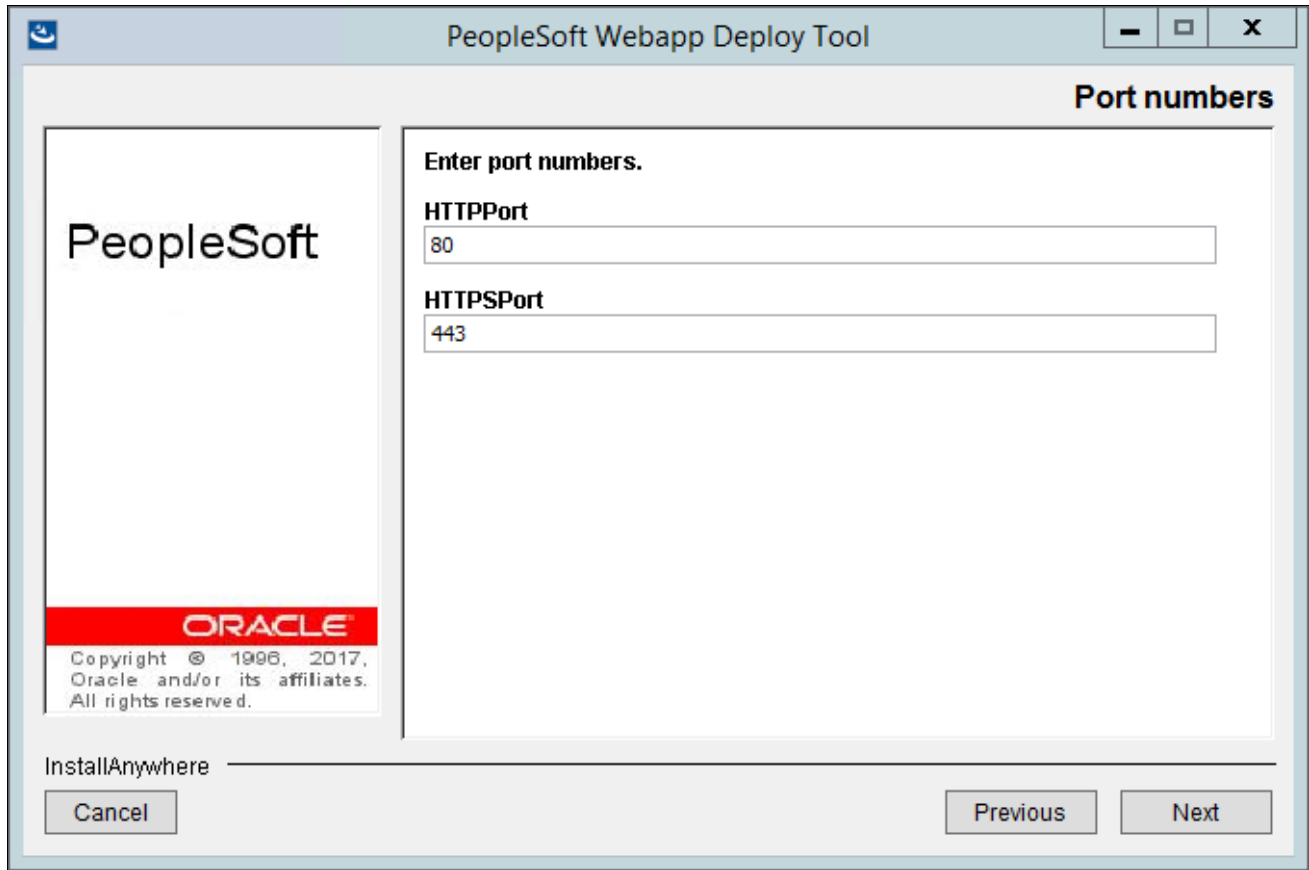

PeopleSoft Webapp Deploy Tool Port numbers window

14. Verify your installation information, such as the web server information, HTTP and HTTPS port numbers, and deployment packages, on the summary screen that appears, as in this example.

Click Install to begin the installation, Previous to go back to make changes on an earlier window, or Cancel to exit the installation.

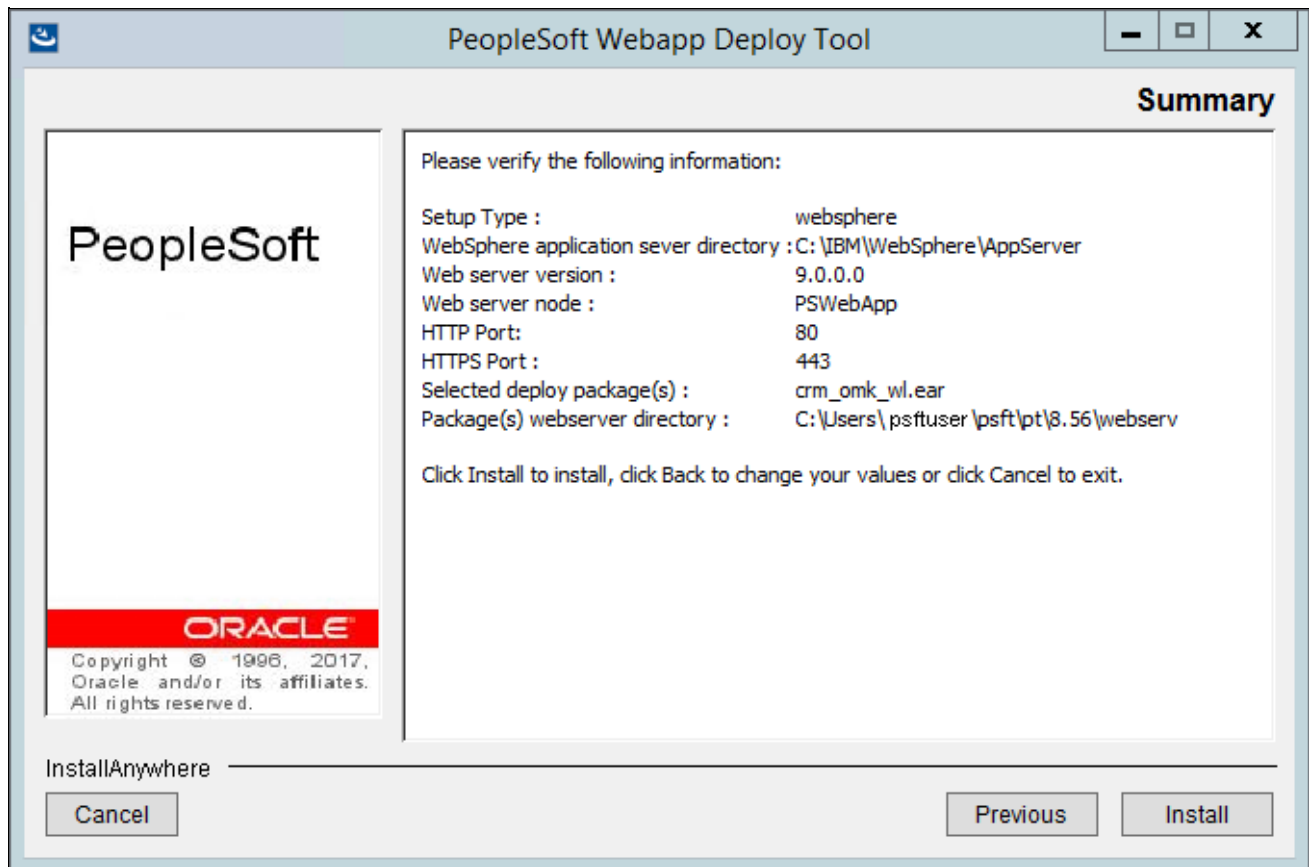


PeopleSoft Webapp Deploy Tool Summary window

A window appears with a progress indicator.

15. A confirmation screen appears when the installation completes, which includes the installation directory, `C:\Users\psftuser\psft\pt\8.56\webserv` in this example.

The Web Application Deployment tool is deployed to the `webserv\<domain_name>` folder in the installation location. For example, for the default domain `PSWebApp`, this would be `C:\Users\psftuser\psft\pt\8.56\webserv\PSWebApp`.

Click Done to exit.

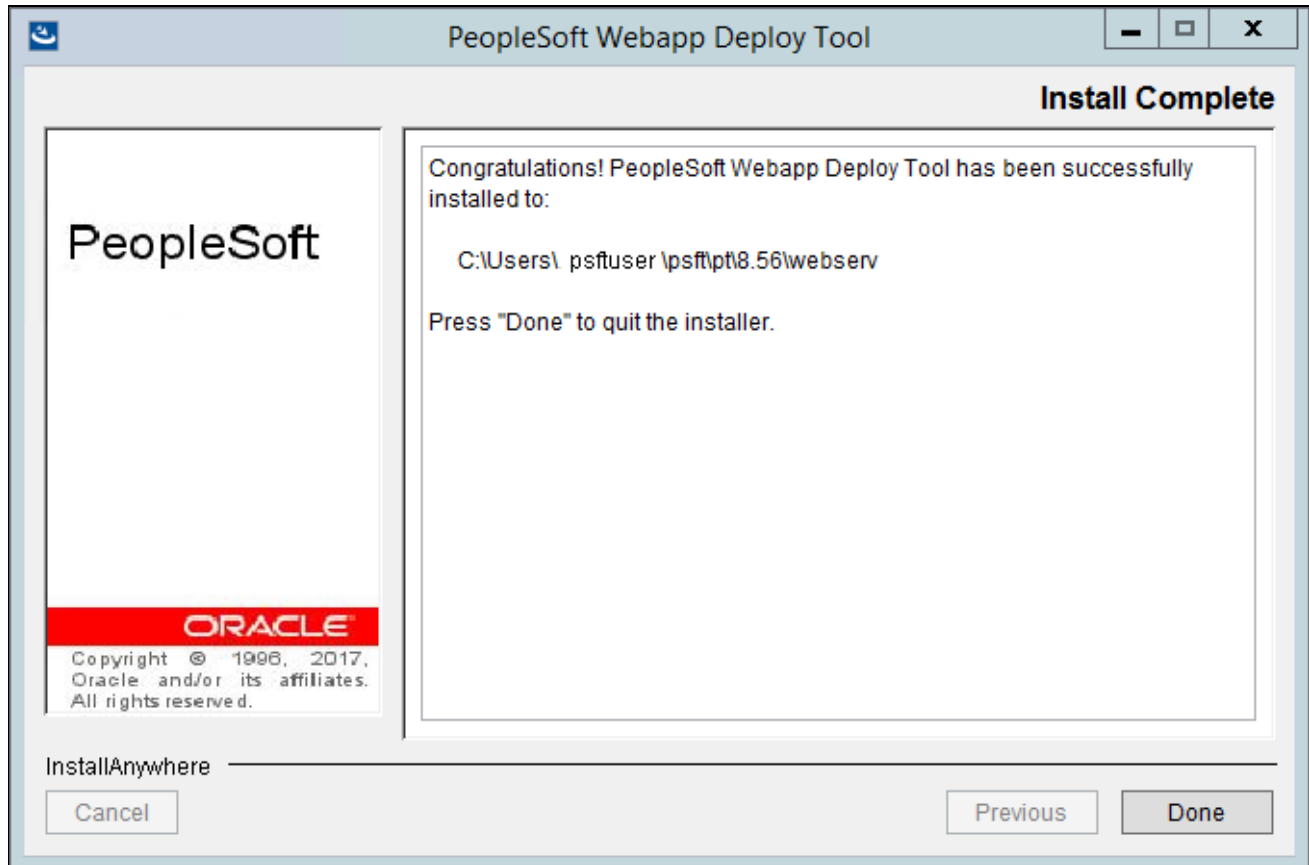

PeopleSoft Webapp Deploy Tool Install Complete window

## Task 17-3: Installing the Web Application Deployment Tool on Oracle WebLogic in Console Mode

Use these instructions to install the Web Application Deployment tool on Oracle WebLogic in console mode.

**Note.** The console mode installation is typically used on UNIX platforms.

1. Set up the PeopleSoft environment by going to `PS_HOME` and running the following command:  

```
../psconfig.sh
```
2. To run the installer, go to `PS_HOME/setup/PsMpWebAppDeployInstall`, and run the following command:  

```
setup.sh -tempdir <temporary_directory> -javahome <absolute_java_path>
```

Use the optional flag `-javahome` if you installed the JRE/JDK files in a directory that is different than the vendor-defined JRE search path. Specify the full absolute path to the JRE/JDK executable; for example:

```
setup.sh -tempdir /home/user/temp -javahome /prod/java8/bin/java
```

See "Using the PeopleSoft Installer," Running the PeopleSoft Installer, for setup command options.

3. You see a welcome message. Enter *I* to continue.

```
Welcome to the InstallShield Wizard for PeopleSoft Webapp Deploy Tool.
```

```
Using the InstallShield Wizard you will deploy PeopleSoft Application⇒
(s) on⇒
your computer.
```

```
Note: If installing onto a Oracle WebLogic Server, make sure to⇒
shutdown any⇒
running web servers to avoid web server corruption.
```

```
Select Next to continue or Cancel to exit.
```

```
Press 1 for Next, 3 to Cancel or 5 to Redisplay [1]
```

4. Enter the directory where you want to deploy the web server domain for the Web Application Deployment, and then enter *I* to continue.

The default directory is *PS\_CFG\_HOME*.

Choose the directory where you wish to deploy the Web Server domain:

```
Please specify a directory name or press Enter [/home/psftuser/psft/pt⇒
/8.56]
```

```
Press 1 for Next, 2 for Previous, 3 to Cancel or 5 to Redisplay [1]
```

5. Enter *I* to select Oracle WebLogic Server, at the following prompt, and then enter *I* to continue.

Choose the installation type that best suits your needs.

```
->1- Oracle WebLogic Server
    2- IBM WebSphere Server
```

```
To select an item enter its number, or 0 when you are finished: [0]
```

```
Press 1 for Next, 2 for Previous, 3 to Cancel or 5 to Redisplay [1]
```

6. Enter the directory where you installed Oracle WebLogic, and press ENTER to continue at the following prompt.

Select the web server root directory:

```
Please specify a directory name or press ENTER [/opt/oracle]
```

```
Press 1 for Next, 3 to Cancel or 5 to Redisplay [1]
```

---

**Note.** The installer displays the supported Oracle WebLogic version. You receive an error message if the correct Oracle WebLogic version is not found in the directory you enter.

---

7. Enter a name for the Web Application Deployment domain, or accept the default name, PSWebApp in this example.

Use a fully qualified domain name, and do not use an IP address.

Enter domain name or click Next to select default:



```
[PSWebApp]
```

```
Press 1 for Next, 3 to Cancel or 5 to Redisplay [1]
```

---

**Important!** The domain that you create for the Web Application Deployment cannot be the same as any existing PeopleSoft Pure Internet Architecture domains. Be sure you do not enter a name that you used for a PeopleSoft Pure Internet Architecture domain.

---

8. Enter the administrator login and password for your Oracle WebLogic domain, and press ENTER to continue.

**Note.** The default login ID is system. The password, which you specified during the PeopleSoft Pure Internet Architecture setup, must be at least 8 alphanumeric characters with at least one number or special character. The system does not display the password or any masking characters as you type.

---

```
Please enter the administrator login and password for WebLogic domain.
```

```
Login ID: [system]
```

```
Password: [password]
```

```
Re-type Password: [password]
```

```
Press 1 for Next, 3 to Cancel or 5 to Redisplay [1]
```

9. Select the type of domain to create—single server, multi server, or distributed managed server.

See "Setting Up the PeopleSoft Pure Internet Architecture in Console Mode," *Installing the PeopleSoft Pure Internet Architecture in Console Mode*.

```
Please select the configuration to install.
```

```
->1- Single Server Domain
    2- Multi Server Domain
    3- Distributed Managed Server
```

```
To select an item enter its number, or 0 when you are finished: [0]
```

```
Press 1 for Next, 3 to Cancel or 5 to Redisplay [1]
```

- *Single Server Domain*

This configuration is intended for single user or very small scale, non-production environments.

- *Multi-Server Domain*

This configuration is intended for a production environment.

- *Distributed Managed Server*

This option is an extension of the Multi-Server Domain selection and installs the necessary files to boot a managed server. This option requires a Multi Server installation to be performed to some other location, which will contain the configuration for this managed server.

10. Enter the *PS\_APP\_HOME* directory that you specified when you installed the PeopleSoft Application software using the PeopleSoft PeopleTools installer.

```
Choose the directory where you previously installed PeopleSoft⇒
Applications, commonly know as "PS_APP_HOME".
```

```
Note: If you have installed PeopleSoft Applications outside PeopleTools⇒
```

PS\_HOME then choose the PeopleSoft Applications home "PS\_APP\_HOME", => else leave the default "PS\_HOME".

Please specify a directory name or press Enter [/opt/PS\_HOME]

Press 1 for Next, 2 for Previous, 3 to Cancel or 5 to Redisplay [1]

11. The next prompt lists all of the available application packages (EAR files). Enter the numbers beside the packages you want to install. *You must select at least one application package from this list.*

Please select the application package to deploy:

->1- CRM OMK

To select an item enter its number, or 0 when you are finished [0]:

Press 1 for Next, 3 to Cancel or 5 to Redisplay [1]

12. If the application(s) you selected in step 12 requires additional information, supply the necessary information at the next prompt. For example:

CRM OMK :

Database Type: [ORACLE]

Database Server Name: [SERVER1]

Database Port Number: [1431]

Database Instance Name: [CRMDMO]

Database User Name: [SYSADM]

Database User Password: [\*]

Press 1 for Next, 3 to Cancel or 5 to Redisplay [1]

13. Enter HTTP and HTTPS port numbers.

Enter port numbers.

HTTP Port : [80] 80

HTTPS Port : [443] 443

Press 1 for Next, 3 to Cancel or 5 to Redisplay [1]

14. Verify your installation information on the next prompt and press ENTER to begin the installation. An indicator shows your installation progress.

Please verify the following information:

Setup Type : weblogic

Web server root directory : /opt/WLS1221

```

Web server version : 12.2

Web server domain : PSWebApp

HTTP Port : 80

HTTPS Port : 443

Selected deploy package(s) : crm_omk_wl.ear

Package(s) webserver directory : /home/psftuser/psft/pt/8.56/webserv

Press 1 for Next, 3 to Cancel or 5 to Redisplay [1]

```

15. You see a message indicating the installation is complete; for example:

```

Installation Complete
-----

Congratulations! PeopleSoft Webapp Deploy Tool has been successfully=>
  installed
to:

/home/psftuser/psft/pt/8.56/webserv

PRESS <ENTER> TO EXIT THE INSTALLER:

```

16. After the installation is complete, you must deploy the Web Application Deployment tool.

- a. Go to the directory where the web server domain was installed:

```
cd <WebAppDeploy_DIR>/webserv/<domain_name>
```

The *<WebAppDeploy\_DIR>* is the directory where the web server domain for the Web Application Deployment was installed. The *<domain\_name>* is the web server domain name you provided. For example, if you accepted the defaults:

```
cd /home/user/psft/pt/8.56/webserv/PSWebApp
```

- b. Run this command:

```
startPSWEBAPPS.sh
```

- c. If you want to deploy at a later time, use the same command.

## Task 17-4: Installing the Web Application Deployment Tool on IBM WebSphere in Console Mode

---

Use these instructions to install the Web Application Deployment tool on IBM WebSphere in console mode.

**Note.** The console mode installation is typically used on UNIX platforms.

1. Set up the PeopleSoft environment by going to *PS\_HOME* and using the following command:

```
../psconfig.sh
```

2. Start IBM WebSphere on the server on which you plan to deploy the Web Application Deployment tool.

See "Setting Up the PeopleSoft Pure Internet Architecture in Console Mode," Testing and Administering the PeopleSoft Pure Internet Architecture.

Change directory to the bin directory under the directory where you installed IBM WebSphere, *WAS\_HOME*. Use the following commands:

```
cd WAS_HOME/bin
startServer.sh server_name
```

3. To run the installer, go to *PS\_HOME/setup/PsMpWebAppDeployInstall* and run the following command:

```
setup.sh -javahome <absolute_java_path>
```

Use the optional flag `-javahome` if you installed the JRE/JDK files in a directory that is different than the vendor-defined JRE search path. Specify the full absolute path to the JRE/JDK executable; for example:

```
setup.sh -javahome /prod/java8/bin/java
```

See "Using the PeopleSoft Installer," Running the PeopleSoft Installer, for setup command options.

4. You see a Welcome message. Enter *1* to continue.

```
Welcome to the InstallShield Wizard for PeopleSoft Webapp Deploy Tool.
Using the InstallShield Wizard you will deploy PeopleSoft Application⇒
(s) on your⇒
computer.
```

Note: If installing onto a Oracle WebLogic Server, make sure to⇒  
shutdown any⇒  
running web servers to avoid web server corruption.

Select Next to continue or Cancel to exit.

Press 1 for Next, 3 to Cancel or 5 to Redisplay [1]

5. Enter the directory where you want to deploy the domain for the Web Application Deployment tool, and then enter *1* to continue.

The default directory is *PS\_CFG\_HOME*.

Choose the directory where you wish to deploy the Web Server domain:

```
Please specify a directory name or press Enter [/home/user/psft/pt/8.56]
```

Press 1 for Next, 3 to Cancel or 5 to Redisplay [1]

6. Enter *2*, to select the IBM WebSphere Server, at the following prompt:

Choose the setup type that best suits your needs.

```
1- Oracle WebLogic Server
->2- IBM WebSphere Server
```

To select an item enter its number, or 0 when you are finished: [0]

Press 1 for Next, 3 to Cancel or 5 to Redisplay [1]

7. Enter the root directory where you installed IBM WebSphere at the following prompt, and press ENTER to

continue:

Select the WebSphere Application Server directory:

Directory Name:

Please specify a directory name or press Enter [/opt/IBM/WebSphere/App⇒  
Server]:

Press 1 for Next, 3 to Cancel or 5 to Redisplay [1]

---

**Note.** If the web server on which you are installing the Web Application Deployment tool is not up and running, you receive an error message at this point instructing you to start your web server.

---

8. Enter the administrator login, and then enter the password twice, for the IBM WebSphere profile. Enter *1* to continue.

Please enter the administrator login and password for WebSphere profile.

Login ID : [system]

Password : [password]

Re-type Password : [password]

Press 1 for Next, 3 to Cancel or 5 to Redisplay [1]

9. Enter a name for the Web Application Deploy domain, or accept the default name, PSWebApp. Use a fully qualified domain name, and do not use an IP address. Press *1* to continue.

Enter domain name or click Next to select default:

[PSWebApp]

Press 1 for Next, 3 to Cancel or 5 to Redisplay [1]

---

**Important!** The domain that you create for the Web Application Deployment tool cannot be the same as any existing PeopleSoft Pure Internet Architecture domains. Be sure you do not enter a name that you used for a PeopleSoft Pure Internet Architecture domain.

---

10. Enter the *PS\_APP\_HOME* directory that you specified when you installed the PeopleSoft application software using the PeopleSoft PeopleTools installer.

Choose the directory where you previously installed PeopleSoft⇒  
Applications, commonly known as "PS\_APP\_HOME".

Note: If you have installed PeopleSoft Applications outside PeopleTools⇒  
PS\_HOME then choose the PeopleSoft Applications home "PS\_APP\_HOME",⇒  
else leave the default "PS\_HOME".

Please specify a directory or press Enter [opt/PS\_HOME]

Press 1 for Next, 3 to Cancel or 5 to Redisplay [1]

11. The next prompt lists all of the available application packages (EAR files). Enter the number corresponding to the packages you want to install. *You must select at least one application package from this list.*

Please select the application package to deploy:

->1- CRM Package

To select an item enter its number, or 0 when you are finished [0]:

Press 1 for Next, 3 to Cancel or 5 to Redisplay [1]

12. If the application(s) you selected in the previous step requires additional information, supply the necessary information at the next prompt. For example:

CRM OMK :

Database Type : [DB2UNIX]

Database Server Name : [SERVER1]

Database Port Number : [1431]

Database Instance Name : [CRMDMO]

Database User Name : [Admin]

Database User Password : [\*]

Press 1 for Next, 3 to Cancel or 5 to Redisplay [1]

In this example, the required information includes:

- *Database Type*  
Enter the RDBMS type; the example uses DB2UNIX.
- *Database Server Name*  
Enter the name of the machine that is hosting the database, SERVER1 in the example.
- *Database Port Number*  
Consult with your database administrator for the correct port number. The port number shown in the example is 1431.
- *Database Instance Name*  
Enter the database name, for example CRMDMO.
- *Database User Name*  
Enter the user name for the database, for example sysadm or admin.
- *Database User Password*  
Enter the password for the database user.

13. Enter HTTP and HTTPS port numbers at the following prompt. Press 1 to continue.

Enter port numbers.

HTTP Port: [80]: 80

HTTPS Port: [443]: 443

Press 1 for Next, 3 to Cancel or 5 to Redisplay [1]

14. Verify your installation information at the next prompt and press ENTER to begin the installation.

An indicator shows your installation progress.

Please verify the following information:

Setup Type : websphere

WebSphere application server directory : /home/IBM/WebSphere/AppServer

Web server version : 8.5.5.0

Web server node : PSWebApp

HTTP Port : 80

HTTPS Port : 443

Selected deploy packages(s) : crm\_omn\_wl.ear

Packages(s) webserver directory : /home/user/psft/pt/8.56/webserv

Press 1 for Next, 3 to Cancel or 5 to Redisplay [1]

15. A confirmation screen appears when the installation completes. Click Finish to exit the install shield wizard.

16. After the installation is complete, you must stop and start the IBM WebSphere server. Use the following commands, where *WAS\_HOME* refers to the IBM WebSphere installation location, and *server\_name* is the name of the IBM WebSphere server you used in step 2.

```
cd WAS_HOME/bin
../stopServer.sh server_name
../startServer.sh server_name
```

## Task 17-5: Installing the Web Application Deployment Tool in Silent Mode

---

This section discusses:

- Understanding the Web Application Deployment Tool Silent Mode Installation and the Response File
- Editing the Web Application Deployment Tool Response File to Deploy DES
- Running the Web Application Deployment Tool Silent Mode Installation to Deploy DES

### Understanding the Web Application Deployment Tool Silent Mode Installation and the Response File

You can carry out a silent installation of the Web Application Deployment tool by providing all the required settings in a response file. With silent installation there is no user interaction after the installation begins. Silent mode installation of the Web Application Deployment tool is supported for both Microsoft Windows and UNIX operating systems platforms, and for both Oracle WebLogic and IBM WebSphere web servers.

## Task 17-5-1: Editing the Web Application Deployment Tool Response File to Deploy DES

You need a response file to start the installer in silent mode. The Web Application Deployment tool installer comes with a response file template (responsefile.txt) that can be found under `PS_HOME\setup\PsmPWebAppDeployInstall`. Modify the values in the response file according to your installation requirements. The response file should contain all the input parameters that are needed for deploying Web Application Deployment tool.

For information on the parameters in the response file, see the previous sections in this chapter on installing the Web Application Deployment tool.

The response file includes the following sections:

- Comments and instructions, including the command to run the silent installation.
- Parameters needed for the installations, such as `PS_CFG_HOME`, `DOMAIN_NAME`, `SERVER_TYPE`.

*Sample response file template:*

```
# *****
#
# Response file for WebAppDeploy Installations
#
# 1. In Windows
# use "\\\" as file path separator
#   Open a command prompt; go to PS_HOME\setup\PsmPWebAppDeployInstall=>
#   and run following commands
#   setup.bat -i silent -DRES_FILE_PATH=<path_to_response_file>
#
# 2. In UNIX
# use "/" as file path separator
#   Go to PS_HOME/setup/PsmPWebAppDeployInstall and run following=>
#   commands
#   setup.sh -i silent -DRES_FILE_PATH=<path_to_response_file>
#
# *****

# Set the below variable to the location where you want to install DES.
# PLEASE NOTE this variable could be ANY DIRECTORY on your machine. It=>
# includes but is definitely not limited to PeopleTools Home.
PS_CFG_HOME=

# Domain Name
DOMAIN_NAME=

# Web server type. Possible values are "weblogic", "websphere"
SERVER_TYPE=weblogic

# WebLogic home, the location where Oracle WebLogic is installed (for Web=>
# Logic deployment only)
BEA_HOME=C:\\oracle
```



```

# WebSphere Home, the location where IBM WebSphere is installed (for WebSphere deployment only)
#WS_HOME=

# admin console user id/password for securing WebLogic/WebSphere admin console credential
USER_ID=system
USER_PWD=
USER_PWD_RETYPE=

HTTP_PORT=80
HTTPS_PORT=443

# DES support only NEW_DOMAIN , so please do not change the below variable.
DOMAIN_TYPE=NEW_DOMAIN

# DES support only CREATE_NEW_DOMAIN , so please do not change the below variable.
INSTALL_ACTION=CREATE_NEW_DOMAIN

# Install type to specify whether the installation is a single server or multi server deployment,
# possible values for INSTALL_TYPE are singleserver, multiserver, distributedmanagedserver
INSTALL_TYPE=singleserver

# If your PeopleSoft Applications install is decoupled from PS_HOME then PS_APP_HOME will be the actual path to PS_APP_HOME, else it should be the path to PS_HOME.
PS_APP_HOME=

# Please enter the CRM specific DB information

# possible values for DB_TYPE are MSSQL,ORACLE,DB2UDB
DB_TYPE=MSSQL
DB_SERVER_NAME=
DB_PORT=1433
DB_SERVER_INSTANCE=
DB_USER=Admin
DB_PASSWORD=

```

## Task 17-5-2: Running the Web Application Deployment Tool Silent Mode Installation to Deploy DES

To install the Web Application Deployment tool in silent mode, use the response file that you modified for your configuration. Substitute the location where you saved the response file for *<path\_to\_response\_file>* in the following procedures:

1. Open *PS\_HOME\setup\PsmPWebAppDeployInstall\responsefile.txt* for editing.
2. Modify the file for your environment, and then save the file.

- If your web server is on Oracle WebLogic:  
Specify `SERVER_TYPE=weblogic` and the installation location for the Oracle WebLogic software, such as `BEA_HOME=C:\WLS1221`.
  - If your web server is on IBM WebSphere:  
Specify `SERVER_TYPE=websphere` and the installation location for the IBM WebSphere software, such as `WS_HOME=C:\IBM\WebSphere\AppServer`. In addition, add a comment character (`#`, pound or hash sign) in front of the line `BEA_HOME=`.
  - Enter values for the remaining installation parameters.
3. In a command prompt, go to `PS_HOME\setup\PsmPWebAppDeployInstall`.
  4. On Microsoft Windows, run the following command, using `"\"` as a separator in the file path:  
`setup.bat -i silent -DRES_FILE_PATH=<path_to_response_file>`

For example:

```
setup.bat -i silent -DRES_FILE_PATH=C:\\pt856\\setup\\PSMpWebAppDeploy⇒
Install
```

5. On UNIX or Linux, run the following command, using `"/"` as a separator in the file path:  
`setup.sh -i silent -DRES_FILE_PATH=<path_to_response_file>`

For example:

```
setup.sh -i silent -DRES_FILE_PATH=/home/pt856/setup/PsmPWebAppDeploy⇒
Install
```

## Task 17-6: Testing and Troubleshooting the Web Application Deployment

---

Check the log file for any problems encountered during installation. The log file is saved in the following location:

```
<WebAppDeploy_DIR>/webserv/webappinstall<domain_name>.log
```

The `WebAppDeploy_DIR` is the directory where the web server domain for the Web Application Deployment was installed. The `<domain_name>` is the name you specified for the Web Application Deployment web server domain, such as `PSWebApp`.

If you need to start or stop Oracle WebLogic or IBM WebSphere, use the commands given in the chapter on installing the PeopleSoft Pure Internet Architecture.

See Testing the PeopleSoft Pure Internet Architecture Installation in the chapters on setting up the PeopleSoft Pure Internet Architecture.

## Appendix A

# Describing Debugger Requirements

This appendix discusses:

- Describing Debugger Requirements for the AIX Operating System
- Describing Debugger Requirements for the HP-UX Operating System
- Describing Debugger Requirements for the Linux Operating System
- Describing Debugger Requirements for the Oracle Solaris Operating System

## Describing Debugger Requirements for the AIX Operating System

If you are installing on an AIX platform, download and install the latest gdb RPM from IBM's website, and install it.

## Describing Debugger Requirements for the HP-UX Operating System

If you are installing on an HP-UX platform, download and install the latest wdb from <http://www.hp.com/go/wdb>.

## Describing Debugger Requirements for the Linux Operating System

If you are installing on a Linux platform, install the "glibc-debuginfo" RPM package.

There should be one "glibc-debuginfo" package for each installed "glibc" package and the version numbers must match exactly. Use the following commands to determine the packages installed:

- To see the installed "glibc" versions, run:

```
rpm -q --queryformat "%{NAME}-%{VERSION}-%{RELEASE}-%{ARCH}\n" glibc
```

For example, running this command on an Intel-based Linux system should produce output similar to this:

```
glibc-2.5-24-i686  
glibc-2.5-24-x86_64
```

Running this command on a zSeries Linux system should produce output similar to this:

```
glibc-24-31.2-s390x
```

- To see the installed "glibc-debuginfo" packages, run:

```
rpm -q --queryformat "%{NAME}-%{VERSION}-%{RELEASE}-%{ARCH}\n" glibc->
debuginfo
```

Make sure that the "glibc-debuginfo" RPM version is exactly the same as the "glibc" version.

## **Describing Debugger Requirements for the Oracle Solaris Operating System**

---

If you are installing on an Oracle Solaris platform, install dbx. No compiler license of any kind is needed for this. Download the latest Sun Studio, and on the Select Components page of the installer, expand the Compilers and Tools component and deselect all of the subcomponents except dbx. Also deselect the Performance Library and Third-Party Tools components. The installer will install the dbx subcomponent and the Support files subcomponent. The Support files subcomponent includes packages on which dbx depends. After you complete the installation, add the full path to dbx to your PATH environment variable.

## Appendix B

# Relinking SQR on UNIX

This appendix discusses:

- Understanding SQR Relinking
- Relinking SQR on UNIX
- Relinking SQR on Oracle Solaris

## Understanding SQR Relinking

---

PeopleSoft SQR is now linked with Unicode libraries and therefore no longer requires relinking with Unicode libraries. PeopleSoft SQR uses dynamic linking for database connectivity libraries and should not require relinking to support new versions of database connectivity. The exception to this rule is if the PeopleSoft PeopleTools release spans multiple RDBMS versions and the database connectivity changes the names or functionality of required libraries in the new release. In addition, relinking may be required for invoking an external application's APIs using the UFUNC.C interface, as described in the PeopleSoft product documentation.

See *PeopleTools: SQR for PeopleSoft Developers*, "Invoking an External Application API by Using the UFUNC.C Interface."

For example, PeopleSoft PeopleTools is currently supported on Oracle 11g or Oracle 12c. Based on the timing of our release we built the SQR modules for a specific PeopleSoft release with the lowest supported RDBMS version. For the current PeopleSoft PeopleTools release, the minimum supported Oracle version is Oracle 11g (11.2.0.x). This means PeopleSoft SQR will work right out of the box on Oracle 11g (no relink required).

## Task B-1: Relinking SQR on UNIX

---

Here's a high-level overview of what you need to do, on a UNIX platform, to relink SQR:

1. Export the following environment variables:
  - SQRDIR, the location of the SQR executable.
  - PS\_HOME, the PeopleSoft home directory.
  - PS\_DB, the platform identifier variable:  
DBX for DB2 UDB for Linux, UNIX, and Windows
2. Export the database install home directory:  
DB2\_HOME
3. Add SQRDIR to the library path.  

```
export LD_LIBRARY_PATH=$SQRDIR:$LD_LIBRARY_PATH
```

  
or

```
export SHLIB_PATH=$SQRDIR:$SHLIB_PATH
```

4. Change directory to `<PS_HOME>/bin/sqr/<PS_DB>/lib`
5. Run `sqrmake`.

## Task B-2: Relinking SQR on Oracle Solaris

---

The following section is a step-by-step example illustrating how to relink SQR for an Oracle database on the Oracle Solaris platform. Other operating system/database platform combinations work in a similar fashion.

To relink SQR on Oracle Solaris:

1. If the `psconfig.sh` shell script has not been executed, check for SQR environment variables and set them as necessary.

---

**Note.** If your `PS_HOME/psconfig.sh` correctly sets the environment variables described below, you can skip this step.

---

```
env | grep SQRDIR
SQRDIR=
export SQRDIR=/home/PT-SOL/bin/sqr/ORA/bin
```

```
env | grep PS_HOME
PS_HOME=
export PS_HOME=/home/PT-SOL
```

```
env | grep PS_DB
PS_DB=
export PS_DB=ORA
```

```
env | grep ORACLE_HOME
ORACLE_HOME=
export ORACLE_HOME=/products/oracle/11.2.0.4.0-64bit
```

```
export SHLIB_PATH=/home/PT-SOL/bin/sqr/ORA/bin:$SHLIB_PATH
```

2. Recheck the SQR env:

```
st-sun06:$ env | grep -i sqr
```

```
LD_LIBRARY_PATH=/home/PT-SOL/jre/lib/sparcv9/native_threads:/home/PT-SOL/jre/lib/sparcv9/server:/home/PT-SOL/jre/lib/sparcv9:/lib:/usr/lib:⇒
/usr/local/lib:/usr/lib/X11:/tuxedo/prod/12.2.2.0-j12-64bit/lib:⇒
/products/oracle/11.2.0.4.0-64bit/lib:/pt/products/solaris-11-sparc/lib:⇒
/home/PT-SOL/bin:/home/PT-SOL/bin/interfacedrivers:/home/PT-SOL/bin⇒
/sqr/ORA/bin:/home/PT-SOL/optbin:/home/PT-SOL/verity/solaris/_ssol26⇒
/bin:/products/oracle/11.2.0.4.0-64bit/lib
```

```
PWD=/home/PT-SOL/bin/sqr/ORA/bin
```

```
SQRDIR=/home/PT-SOL/bin/sqr/ORA/bin
```

```
SQR_HOME=/home/PT-SOL/bin/sqr/ORA
```

### 3. Relink SQR using sqrmake file.

```
st-sun06:$ sqrmake
```

```
/usr/ccs/bin/ld -o sqr -u __lcH__CimplKcplus_init6F_v_ -s -R/usr/ccs⇒
/lib/sparcv9:/lib/sparcv9:/usr/lib/sparcv9 crti.o CCrti.o crt1.o values⇒
xa.o -Y P,/usr/ccs/lib/sparcv9:/lib/sparcv9:/usr/lib/sparcv9 -L⇒
/products/oracle/11.2.0.4.0-64bit/lib -L/products/oracle/11.2.0.4.0⇒
64bit/rdbms/lib sqr.o rosette.o sqr.a sqrlibsti64.a sgrbcl.a ⇒
sqrzlib.a -L. -lsqrbtunicode /home/PT-SOL/bin/libpdf.so -lclntsh -lc ⇒
/usr/lib/64/libCrun.so.1 /usr/lib/64/libCstd.so.1 -lm -lthread -lc⇒
CCrtn.o crtn.o -lkstat -lnsl -lsocket -lresolv -lgen -ldl -lsched -lrt⇒
-lc -laio -lposix4 -lpool -ladm -lefi
/usr/ccs/bin/ld -o sqrp -u __lcH__CimplKcplus_init6F_v_ -s -R/usr/ccs⇒
/lib/sparcv9:/lib/sparcv9:/usr/lib/sparcv9 crti.o CCrti.o crt1.o values⇒
xa.o -Y P,/usr/ccs/lib/sparcv9:/lib/sparcv9:/usr/lib/sparcv9 -L⇒
/products/oracle/11.2.0.4.0-64bit/lib -L/products/oracle/11.2.0.4.0⇒
64bit/rdbms/lib sqrp.o rosette.o sqrp.a sqrlibsti64.a sgrbcl.a ⇒
sqrzlib.a -L. -lsqrbtunicode /home/PT-SOL/bin/libpdf.so -lc /usr/lib⇒
/64/libCrun.so.1 /usr/lib/64/libCstd.so.1 -lm -lthread -lc CCrtn.o⇒
crtn.o -lkstat -lnsl -lsocket -lresolv -lgen -ldl -lsched -lrt -lc ⇒
laio -lposix4 -lpool -ladm -lefi
/usr/ccs/bin/ld -o sqrt -u __lcH__CimplKcplus_init6F_v_ -s -R/usr/ccs⇒
/lib/sparcv9:/lib/sparcv9:/usr/lib/sparcv9 crti.o CCrti.o crt1.o values⇒
xa.o -Y P,/usr/ccs/lib/sparcv9:/lib/sparcv9:/usr/lib/sparcv9 -L⇒
/products/oracle/11.2.0.4.0-64bit/lib -L/products/oracle/11.2.0.4.0⇒
64bit/rdbms/lib sqrt.o rosette.o sqrt.a sqrlibsti64.a sgrbcl.a⇒
sqrzlib.a -L. -lsqrbtunicode /home/PT-SOL/bin/libpdf.so -lclntsh -lc ⇒
/usr/lib/64/libCrun.so.1 /usr/lib/64/libCstd.so.1 -lm -lthread -lc⇒
CCrtn.o crtn.o -lkstat -lnsl -lsocket -lresolv -lgen -ldl -lsched -lrt⇒
-lc -laio -lposix4 -lpool -ladm -lefi
cp -i sqr /home/PT-SOL/bin/sqr/ORA/bin/sqr
cp: overwrite /home/PT-SOL/bin/sqr/ORA/bin/sqr (yes/no)? yes
cp -i sqrp /home/PT-SOL/bin/sqr/ORA/bin/sqrp
cp: overwrite /home/PT-SOL/bin/sqr/ORA/bin/sqrp (yes/no)? yes
cp -i sqrt /home/PT-SOL/bin/sqr/ORA/bin/sqrt
cp: overwrite /home/PT-SOL/bin/sqr/ORA/bin/sqrt (yes/no)? yes
chmod ugo+x /home/PT-SOL/bin/sqr/ORA/bin/sqr
chmod ugo+x /home/PT-SOL/bin/sqr/ORA/bin/sqrp
chmod ugo+x /home/PT-SOL/bin/sqr/ORA/bin/sqrt
```

### 4. Validate the relinked SQR executable:

#### a. Once linked, change directory to \$\$SQRDIR.

```
st-sun06:$ cd $$SQRDIR
st-sun06:$ pwd
/home/PT-SOL/bin/sqr/ORA/bin
```

## b. Enter this command:

```
st-sun06:$ sqr -id
```

```
SQR for PeopleSoft/8.56/Sun/SunOS/Oracle/Apr 17 2017
```

Use, duplication or disclosure by the Government is subject to restrictions as set forth in subparagraph (c) (1) (ii) of DFARS 52.227-7013 for the DOD and as set forth in FAR 52.227-19 (a) - (d) for civilian agencies.

SQR is a registered trademark.

Any other brand and product names used herein may be trademarks or registered trademarks of their respective companies.

## c. Enter this command:

```
SQR for PeopleSoft V8.56
```

```
SQR for PeopleSoft [program] [username/password] [-flags...] =>
[pars...] [@file...]
```

where

```

    program = Report filename
    username = Database username
    password = Database password
    -A = Append to existing output file
    -Bn = Fetch n rows at a time
    -Burst:{xx} = Generate .LIS using specified burst mode (S,T or P)
    -Dn = Display report while processing, pause every n lines
    -DEBUGxx = Compile #DEBUG[x] lines
    -DNT:{xx} = Set the default numeric type =>
(Decimal,Integer,Float)
    -E[file] = Direct errors to {program}.ERR or specified file
    -EH_BQD[:file] = Create BQD file or set linkage for Enhanced HTML
    -EH_APPLETS:dir = Set applets directory name for Enhanced HTML
    -EH_BROWSER:{xx} = Specify target browser for Enhanced HTML
    -EH_CSV[:file] = Create CSV file or set CSV linkage for Enhanced HTML
    -EH_CSVONLY = Create CSV file but do not create HTML file
    -EH_ICONS:dir = Set icons directory name for Enhanced HTML
    -EH_IMAGES:dir = Set images directory name for Enhanced HTML
    -EH_KEEP = Copy (not move) files when used with -EH_ZIP
    -EH_FULLHTML:{xx} = Specify the level of the generated Enhanced HTML
    -EH_LANGUAGE:{xx} = Specify language for Enhanced HTML navigation bar
    -EH_PDF = Set PDF linkage for Enhanced HTML
    -EH_SCALE:nn = Set scaling factor for Enhanced HTML
    -EH_XIMG = Do not remove directory path from IMAGE reference

```



```

-EH_XML[:file] = Set XML linkage for Enhanced HTML
-EH_ZIP[:file] = Move files to ZIP container file
-F[dir/file] = Use [dir]{program}.LIS or specified file for⇒
output
-Idir_list = Directory list to be searched for include files
-ID = Display copyright banner
-KEEP = Keep the .SPF file(s) after program run
-LL{s|d}{c|i} = Load-Lookup: S=SQR, D=DB, C=Case Sensitive, I⇒
Insensitive
-Mfile = Maximum sizes declared in file
-NOLIS = Do not generate .LIS file(s) from .SPF file(s)
-O[file] = Direct log messages to console or specified file
-PRINTER:{xx} = Printer mode: EP, EH, HT, LP, HP, PD, or PS
-RS = Save run time file in {program}.sqt
-RT = Use run time file (skip compile)
-S = Display cursor status at end of run
-Tn = Test report for n pages, ignore 'order by's
-XB = Do not display the program banner
-XI = Do not allow user interaction during program run
-XL = Do not logon to database (no SQL in program)
-XLFF = Do not generate trailing report form feed
-XTB = Do not trim blanks from LP .LIS files
-XNAV = Do not put navigation bar into .HTM file
-XTOC = Do not generate Table Of Contents
-ZEN{name} = Set default encoding name
-ZIF[file] = Complete pathname of the initialization file to⇒
use
-ZMF[file] = Complete pathname of the message file to use
pars = Report parameters for ASK and INPUT commands
@file = File containing report parameters, one per line

```

5. Change directory (cd) to the actual location of \$PS\_HOME to set the PeopleSoft environment with the correct SQR environment.

```

st-sun06:$ . ./psconfig.sh
st-sun06:$

```

6. Test SQR from the UNIX command line, entering the access ID and password for the database <DBNAME>.

---

**Note.** Remember that this example is specifically for Oracle database platforms. The commands for other RDBMS platforms may be different.

---

```

st-sun06:$ sqr $PS_HOME/sqr/xrffwin <ACCESS_ID>/<ACCESS_PSWD>@<DBNAME> ->
ZIF$PS_⇒
HOME/sqr/pssqr.unx
SQR for PeopleSoft V8.56
Database Name (Optional, Press ENTER to continue):
Process Instance (Optional, Press ENTER to continue):

SQR for PeopleSoft: End of Run.
st-sun06:$

```

