

Oracle Financial Services Institutional Performance Analytics User Guide

*Release 8.0.1
September 2015*



Oracle Financial Services
Institutional Performance Analytics

Release 8.0.1
September 2015

Copyright © 2015, Oracle and/or its affiliates. All rights reserved.

Printed in U.S.A. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise without the prior written permission.

Trademarks

Oracle is a registered trademark of Oracle Corporation and/or its affiliates.
Other names may be trademarks of their respective owners.

Internet: www.oracle.com/financialservices

Contents

Preface	5
Intended Audience	5
Documentation Accessibility	5
Access to Oracle Support.....	5
Structure.....	5
Related Information Sources	6
CHAPTER 1 <i>Introduction</i>.....	1
Overview of Oracle Financial Services Institutional Performance Analytics (OFSIPA)	1
CHAPTER 2 <i>Overview of Process Flow</i>	3
Introduction	3
Data Flow	4
<i>Dimension Data Flow</i>	5
<i>Key dimensions for reporting</i>	9
Fact Data Flow	11
BI Data Model	15
Data Flow: OFSIPA BI Data Model to Essbase Cubes.....	35
CHAPTER 3 <i>Dimension Loading Process</i>	37
Dimension Tables Population	37
Overview of SCD Process.....	37
Prerequisites	37
Tables Used by the SCD Component.....	38
Executing the SCD Component.....	40
Checking the Execution Status	41
CHAPTER 4 <i>Time Dimension Population</i>	43
Overview of Time Dimension Population	43
Prerequisites	43
Tables used by the Time Dimension Population Transformation	44
Executing the Time Dimension Population Transformation	44
Checking the Execution Status	45
CHAPTER 5 <i>Customer Dimension Population</i>	47
Overview.....	47
Populating Party Dimension.....	47

FSI_MERGE_SETUP_DETAILS.....	47
FSI_MERGE_SETUP_MASTER.....	48
Executing the Customer Dimension Population	49
Checking the Execution Status	49
CHAPTER 6 <i>Account Dimension Population</i>	51
Dimension Tables Population	51
Overview of SCD process.....	51
Prerequisites.....	53
Tables Used by the SCD Component.....	53
Executing the SCD Component.....	56
Checking the Execution Status	57
Load DIM_ACCOUNT through SCD	57
DIM_ACCOUNT SCD.....	58
LOAD DIM TABLES THROUGH SCD.....	58
Improve SCD Performance.....	58
Handling Multiple GAAP Codes for the Same Account Number for the Same MIS Date in SCD.....	60
CHAPTER 7 <i>Exchange Rate History Population</i>.....	61
Introduction	61
Execution of Currency Exchange Rates Population T2T.....	61
Currency Execution Rates - Batch Execution	61
Exchange Rate History Population	62
Checking the Execution Status	64
Validating the Exchange Rate.....	64
CHAPTER 8 <i>Account Summary Population</i>	65
Overview of Account Summary Tables.....	65
Data Flow	66
Overview of Account Summary Population	66
Prerequisites.....	70
Fact Common Account Summary.....	71
Fact CRM Account Summary.....	71
Executing the Account Summary Population T2T.....	72
Fact Common Account Summary.....	72
Fact FTP Account Summary.....	73
Fact PFT Account Summary.....	75
Fact CRM Account Summary.....	76
Checking the Execution Status	78
Account Summary T2Ts.....	78
.....	79

CHAPTER 9	<i>Fact Transaction Summary</i>	81
	Overview.....	81
	Table to Table.....	81
	Executing the Fact Transaction Summary	83
	<i>Fact Common Account Summary - Batch Execution</i>	83
	84
CHAPTER 10	<i>Customer Summary Population</i>	85
	Overview of Common Customer Summary Tables.....	85
	Prerequisites.....	86
	Executing the Customer Summary Population T2T	87
	Error Messages.....	88
	89
CHAPTER 11	<i>Fact Data Population</i>	91
	Introduction	91
	Fact CRM Customer Summary	91
	Load Data into Fact CRM Customer Summary.....	92
	Prerequisites.....	92
	<i>Executing the Fact CRM Customer Summary Population T2Ts</i>	93
	<i>Checking the Execution Status</i>	94
	Fact Partner Expense	94
	Prerequisites.....	94
	Executing the Fact Partner Expense Population T2T.....	95
	<i>Checking the Execution Status</i>	96
	Fact Account Feature Map.....	96
	Prerequisites.....	97
	Executing the Fact Account Feature Map Population T2T	97
	<i>Checking the Execution Status</i>	99
	Fact Customer to Customer Relationship.....	99
	Prerequisites.....	99
	Executing the Fact Customer to Customer Relationship Population T2T	100
	<i>Checking the Execution Status</i>	101
	Fact Opportunity	101
	Prerequisites.....	101
	Executing the Fact Opportunity Population T2T.....	102
	<i>Checking the Execution Status</i>	103
	Fact Opportunity Activity	104
	Prerequisites.....	104
	Executing the Fact Opportunity Activity Population T2T.....	104
	<i>Checking the Execution Status</i>	106
	Fact Sales Representative Compensation.....	106
	Prerequisites.....	106

Executing the Fact Sales Representative Compensation Population T2T	107
<i>Checking the Execution Status</i>	108
Fact Application.....	108
Prerequisites.....	109
Executing the Fact Application Population T2T	109
<i>Checking the Execution Status</i>	111
Account Manager Relation.....	111
Prerequisites.....	111
Executing the Account Manager Relation T2T.....	112
<i>Checking the Execution Status</i>	113
Management Forecast.....	113
Prerequisites.....	114
Executing the Management Forecast T2T	114
<i>Checking the Execution Status</i>	116
Fact Account Customer Relation	116
Prerequisites.....	116
Executing the Account Customer Relation T2T.....	117
<i>Checking the Execution Status</i>	118
Fact Account Profitability	119
<i>Steps to Define Mapping for Custom Reporting Line Items</i>	122
<i>Add Custom Reporting Line or Modify existing Reporting Line</i>	123
<i>Add Custom Reporting Line Hierarchy or Modify Existing Seeded Reporting Line Hierarchy</i>	126
<i>Modify the Seeded Business Metadata</i>	129
<i>Map Maintenance</i>	130
<i>Rollup Signage and Operational Signage</i>	130
Prerequisites.....	132
Executing the Fact Account Profitability Population DT	132
<i>Checking the Execution Status</i>	134
Executing the Seeded Run Rule Framework.....	135
.....	138
CHAPTER 12 Cube Build Process	139
Introduction	139
Overview of Cubes.....	139
Creating Configuration Files.....	140
Building Of Cubes.....	140
Prerequisites.....	141
Tables Used by the Cube Build Component	142
Executing the Cube Build Task.....	142
<i>Checking the Execution Status</i>	144
CHAPTER 13 Predictive Modeling	147
Introduction	147
Guidelines.....	147

Files Used	148
Errors.....	148
CHAPTER 14 <i>Overview of OFSIPA Reports</i>.....	149
Introduction to Dashboards	149
Dashboards	149
<i>Summary</i>	150
<i>Customer Summary</i>	155
<i>Cross-Sell</i>	158
<i>Top 10 Opportunities</i>	160
<i>Opportunities</i>	167
<i>Activities</i>	173
<i>Customer Performance</i>	177
<i>Product Performance</i>	179
<i>Line of Business Performance</i>	180
<i>Balance Sheet</i>	183
<i>Relationship Manager Performance</i>	183
<i>Customer Central</i>	187
<i>Other Performance Metrics</i>	192
<i>What-If Analysis</i>	193
CHAPTER 15 <i>What-If Analysis</i>.....	195
Introduction	195
Configurations for What-If Analysis.....	197
What-If Analysis Limitation	201
.....	201
CHAPTER 16 <i>Segmentation</i>.....	203
Introduction	203
Creating a rule.....	205
Editing a rule.....	207
CHAPTER 17 <i>Service Calls to IPA</i>	217
Introduction	217
Server side settings.....	217
Client Side Settings	218
Input Structure	218
Output Structure	220
Execute Service	221
.....	222
CHAPTER 18 <i>Visibility</i>.....	223

Introduction	223
OBIEE Security	223
Data Security	223
APPENDIX A How to Add a New Dimension	1
Introduction	1
Dimension Definition Process.....	1
<i>Step 1 - Add Business Hierarchy</i>	1
<i>Step 2 - Add Business Dimension</i>	3
<i>Step 3 - Modify Data Set</i>	3
<i>Step 4 - Modify Cube Definition</i>	4
<i>Step 5 - Build Cube</i>	4
<i>Steps to follow while using ESSBASE Source for Relationship Manager Hierarchy</i>	4
Metadata	6
<i>Technical Metadata</i>	6
<i>Optional Metadata</i>	7
<i>Business Metadata</i>	7
<i>Reporting Metadata</i>	7
.....	8
APPENDIX B How to Add a New Measure	9
Introduction	9
Measure Definition Process.....	9
<i>Step 1 - Add Business Measure</i>	9
<i>Step 2 - Modify Cube Definition</i>	10
Build Cube.....	10
APPENDIX C How to Develop a New Cube	11
Introduction to Developing a New Cube.....	11
Procedures to Develop a New Cube.....	11
<i>Step 1 - Add Cube</i>	11
<i>Step 2 - Include Dimensions</i>	11
<i>Step 3 - Specify Variations</i>	11
<i>Step 4 - Specify Dataset</i>	11
<i>Step 5 - Specify Node Level Formula</i>	11
<i>Step 6 - Save and Build</i>	11
APPENDIX D How to Define a Batch	13
Introduction	13
Batch Creation.....	13
APPENDIX E List of Hard-Coded Members	15
List of Hard-Coded Members	15

APPENDIX F	<i>Run Rule Framework</i>	17
Introduction		17
Executing a seeded run		17
Runs available for IPA		20
APPENDIX G	<i>Loading Multiple Load Runs in OFSAA</i>	21
Overview		21
Features		21
Design Details		22
Data Transformations		23
<i>Execution</i>		23
<i>Execution</i>		23
<i>Execution</i>		24

List of Tables

Table 1.	OFSIPA Dimensions	6
Table 2.	Fact Table Flow	11
Table 3.	Derived Entity and Dependent Objects	13
Table 4.	Seeded Cube Metadata	36
Table 5.	SYS_TBL_MASTER Dimensions	38
Table 6.	SYS_STG_JOIN_MASTER Dimensions	39
Table 7.	Columns in FSI_MERGE_SETUP_DETAILS	47
Table 8.	Columns in FSI_MERGE_SETUP_MASTER	48
Table 9.	Example: Type 1 SCDs - Overwriting	51
Table 10.	Example 2: Type 1 SCDs - Overwriting	52
Table 11.	Example: Type 2 SCDs - Creating another dimension record	52
Table 12.	SYS_TBL_MASTER dimensions	53
Table 13.	SYS_STG_JOIN_MASTER dimensions	54
Table 14.	Example: MERGE_HINT and SESSION_ENABLE_STATEMENT in SYS_TBL_MASTER	59
Table 15.	SETUP_MASTER configuration	60
Table 16.	T2T Definition Exchange Rate History	61
Table 17.	Common Account Summary definitions	67
Table 18.	FTP Account Summary definitions	69
Table 19.	PFT Account Summary definitions	69
Table 20.	Common Account Summary T2T Defintions	81
Table 21.	Fact CRM Customer Summary definitions	92
Table 22.	Fact Partner Expense definitions	94
Table 23.	Fact Account Feature Map definitions	96
Table 24.	Fact Customer to Customer Relationship definitions	99
Table 25.	Fact Opportunity definitions	101
Table 26.	Fact Opportunity Activity definitions	104
Table 27.	Fact Sales Representative Compensation	106
Table 28.	Fact Application definitions	108
Table 29.	Account Manager definitions	111
Table 30.	Management Forecast definitions	113
Table 31.	Fact Account Customer Relation definitions	116
Table 32.	Fact Account Profitability	119
Table 33.	FCT_ACCOUNT_SEGMENT_SCORE	204
Table 34.	FCT_ACCT_SEGMENT_MOB_SUMMARY	204
Table 35.	Batch Details	13
Table 36.	Hard-coded members	15

List of Figures

Figure 1. Product Objectives of OFSIPA	4
Figure 2. Staging Tables.....	5
Figure 3. Fact Account Feature Map	16
Figure 4. Fact Account Manager Relationship.....	17
Figure 5. Fact Account Party Role	18
Figure 6. Fact Account Profitability.....	19
Figure 7. Fact Account Segment MOB Summary	20
Figure 8. Fact Account Segment Score	21
Figure 9. Fact Applications Summary	22
Figure 10. Fact Common Account Summary	23
Figure 11. Fact Common Customer Summary	24
Figure 12. Fact CRM Account Summary	25
Figure 13. Fact Cust Cust Relationship	26
Figure 14. Fact Eco Cap Account Summary	27
Figure 15. Fact Opportunity	28
Figure 16. Fact Opportunity Activity.....	29
Figure 17. Fact Reg Cap Account Summary.....	30
Figure 18. Fact Sales Representative Compensation.....	31
Figure 19. Fact Transaction Summary	32
Figure 20. FTP Account Summary.....	33
Figure 21. PFT Account Summary.....	34
Figure 22. PFT Customer Summary	35
Figure 23. <INFODOM>_aCRM_CommonTasks - Task4	63
Figure 24. Account summary tables.....	66
Figure 25. <Infodom>_aCRM_Comm_Acc_Summ	72
Figure 26. <INFODOM>_FTP_Account_Summary	74
Figure 27. <INFOCOM>_PFT_ACCOUNT_SUMMARY	75
Figure 28. <Infodom>_aCRM_CRM_Acc_Summ	77
Figure 29. Fact Common Customer Summary dataflow.....	86
Figure 30. Batch Monitor	88
Figure 31. Fact CRM Customer Summary Population	93
Figure 32. Execute Fact Partner Expense Population.....	95
Figure 33. Execute Fact Account Feature Map Population	98
Figure 34. Execute Fact Customer to Customer Relationship Population.....	100
Figure 35. Execute Fact Opportunity Population.....	102
Figure 36. Execute Fact Opportunity Activity Population.....	105
Figure 37. Execute Fact Sales Representative Compensation Population.....	107
Figure 38. Execute Fact Application Population	110
Figure 39. Execute Account Manager Relation	112
Figure 40. Execute Management Forecast.....	115
Figure 41. Execute Account Customer Relation.....	117

Figure 42. Reporting Line Hierarchy	120
Figure 43. Reporting Line Hierarchy	120
Figure 44. Mapper Definition.....	121
Figure 45. Mapper Definition - Reporting Line Hierarchy	122
Figure 46. Attributes	123
Figure 47. Members	124
Figure 48. Member Definition (New Mode)	125
Figure 49. Member Definition (Edit Mode).....	126
Figure 50. Hierarchy Definition (New Mode)	127
Figure 51. Rep Line batch execution	128
Figure 52. Hierarchies.....	129
Figure 53. Business Hierarchy.....	130
Figure 54. Execute Fact Account Profitability Population.....	133
Figure 55. Task Definition.....	134
Figure 56. Seeded Run Rule Framework	135
Figure 57. Batch execution	144
Figure 58. Open Customers by Product	150
Figure 59. Revenue Distribution	151
Figure 60. Customer Summary by LOB	151
Figure 61. Top 10 Products.....	152
Figure 62. Product Revenue Analysis	153
Figure 63. Product Penetration Report.....	154
Figure 64. Customer Distribution.....	155
Figure 65. Top 10 Customers by Revenue	156
Figure 66. Customer Distribution By Region	156
Figure 67. Top 10 Products by Open Customers.....	157
Figure 68. Cross-sell Performance	158
Figure 69. Cross-sell over Time.....	159
Figure 70. Top 10 Sales Employees.....	160
Figure 71. Top 10 Current Quarter Opportunities	161
Figure 72. Top 10 Wins	162
Figure 73. Top 10 Latest Opportunities.....	163
Figure 74. Top 10 Stalled Opportunities.....	164
Figure 75. Top 10 Strategic Opportunities	164
Figure 76. Top 10 Opportunities - Existing Customers	165
Figure 77. Top 10 Opportunities by Opportunity Revenue.....	166
Figure 78. Opportunities by LOB.....	167
Figure 79. Opportunities by History	168
Figure 80. Average day at Sales Stage	169
Figure 81. Pipeline by Open Mouth	170
Figure 82. Pipeline Revenue by Sales Stage	170
Figure 83. Opportunity Distribution by Industry.....	171
Figure 84. Opportunities by Region.....	172
Figure 85. No. of Opportunities with Wins.....	172
Figure 86. Activity Distribution.....	173

Figure 87. Opportunities with Activities	174
Figure 88. Top 5 Opportunities by No. of Activities	175
Figure 89. Bottom 5 Opportunities by No. of Activities.....	176
Figure 90. Balance Sheet	176
Figure 91. Profit and Loss Summary	177
Figure 92. Risk Adjusted Performance Metrics	178
Figure 93. Balance Sheet	179
Figure 94. Profit and Loss Summary	179
Figure 95. Profit and Loss - Scenario Comparison	180
Figure 96. Profit and Loss Summary	180
Figure 97. Profit and Loss - Scenario Comparison	181
Figure 98. Cross-sell Performance	181
Figure 99. Cross-sell Over Time	182
Figure 100. Balance Sheet.....	183
Figure 101. Relationship Manager - Profit and Loss Summary.....	183
Figure 102. Relationship Manager Portfolio	184
Figure 103. Relationship Manager Organization Performance.....	185
Figure 104. Cross-sell Performance	186
Figure 105. Cross-sell over Time	187
Figure 106. Margin Report.....	192
Figure 107. What-If Analysis.....	194

Preface

Intended Audience

Welcome to Release 8.0 of the *Oracle Financial Services Institutional Performance Analytics* User Guide.

This user guide is intended for the users of Oracle Financial Services Institutional Performance Analytics application.

See *Related Information Sources* for more Oracle product information.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at

<http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>

Access to Oracle Support

Oracle customers have access to electronic support through My Oracle Support. For information, visit:

- <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info>
- <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

Structure

This user guide has been segregated into the following chapters:

- [Chapter 1-Introduction](#)
- [Chapter 2-Overview of Process Flow](#)
- [Chapter 3-Dimension Loading Process](#)
- [Chapter 4-Time Dimension Population](#)
- [Chapter 5-Customer Dimension Population](#)
- [Chapter 6-Account Dimension Population](#)
- [Chapter 7-Exchange Rate History Population](#)

- [Chapter 8-Account Summary Population](#)
- [Chapter 9-Fact Transaction Summary](#)
- [Chapter 10-Customer Summary Population](#)
- [Chapter 11-Fact Data Population](#)
- [Chapter 12-Cube Build Process](#)
- [Chapter 13-Predictive Modeling](#)
- [Chapter 14-Overview of OFSIPA Reports](#)
- [Chapter 16-Segmentation](#)
- [Chapter 17-Service Calls to IPA](#)
- [Chapter 18-Visibility](#)
- [Appendix A, How to Add a New Dimension](#)
- [Appendix B, How to Add a New Measure](#)
- [Appendix C, How to Develop a New Cube](#)
- [Appendix D, How to Define a Batch](#)
- [Appendix E, List of Hard-Coded Members](#)
- [Appendix F, Run Rule Framework](#)
- [Appendix G, Loading Multiple Load Runs in OFSAA](#)

Related Information Sources

- [Oracle Financial Services Advanced Analytical Applications Infrastructure Installation and Configuration Guide](#)
- [Oracle Financial Services Advanced Analytical Applications Infrastructure User Guide](#)
- [Oracle Financial Services Retail Performance Analytics User Guide](#)
- [Oracle Financial Services Retail Customer Analytics User Guide](#)

Overview of Oracle Financial Services Institutional Performance Analytics (OFSIPA)

Oracle Financial Services Institutional Performance Analytics (OFSIPA) is a complete end-to-end web-based Business Intelligence solution for Customer Analytics.'

It provides tools for data integration and includes customizable, pre-built dashboards and reports, a reporting data model, and user friendly functional subject areas for ad-hoc reporting.

It enables you to actively plan, manage, and track marketing investments with pre-built reports, dashboards, and underlying data structures.

The OFSIPA solution is a part of Profitability Pack and is packaged along with AAI 8.0 and other applications. This OFSIPA is supported for Oracle 11g and 12c.

OFSIPA solution is built using:

- OBIEE 11.1.1.7.1 for Dashboard and Reports activities
- Essbase 11.1.2.3+ for 12c database

This manual deals with essential Oracle Financial Services Analytical Applications (OFSAA) Infrastructure required for OFSIPA activities, process flow for the data transformation and cube building processes, and functional details about the dashboards and reports. In addition, it includes subject areas which could be used for ad-hoc reporting using OBIEE Answers tool.

This chapter discusses the following topics:

- [Introduction](#)
- [Data Flow](#)
- [Fact Data Flow](#)
- [Data Flow: OFSIPA BI Data Model to Essbase Cubes](#)
- [BI Data Model](#)

Introduction

Oracle Financial Services Institutional Performance Analytics (OFSIPA) 8.0 utilizes OBIEE technology to present:

- Behavioral and Engagement trends of its target segments - exposures, commitments, line utilization, assets/liabilities, deposits, withdrawals, fees, income, recent transactions, and so on.
- Performance of the business and underlying customers.
- Product holdings and Relationship depth across the organization (that is Corporate client and any of its sub-divisions or subsidiaries).
- Efficiency of the sales force in terms of ongoing customer revenue generation, cross-sell and up-sell, product usage, and pipeline.
- Efficiency of investments such as marketing, partner development, and so on.

Following diagram depicts the product objectives of OFSIPA 8.0:

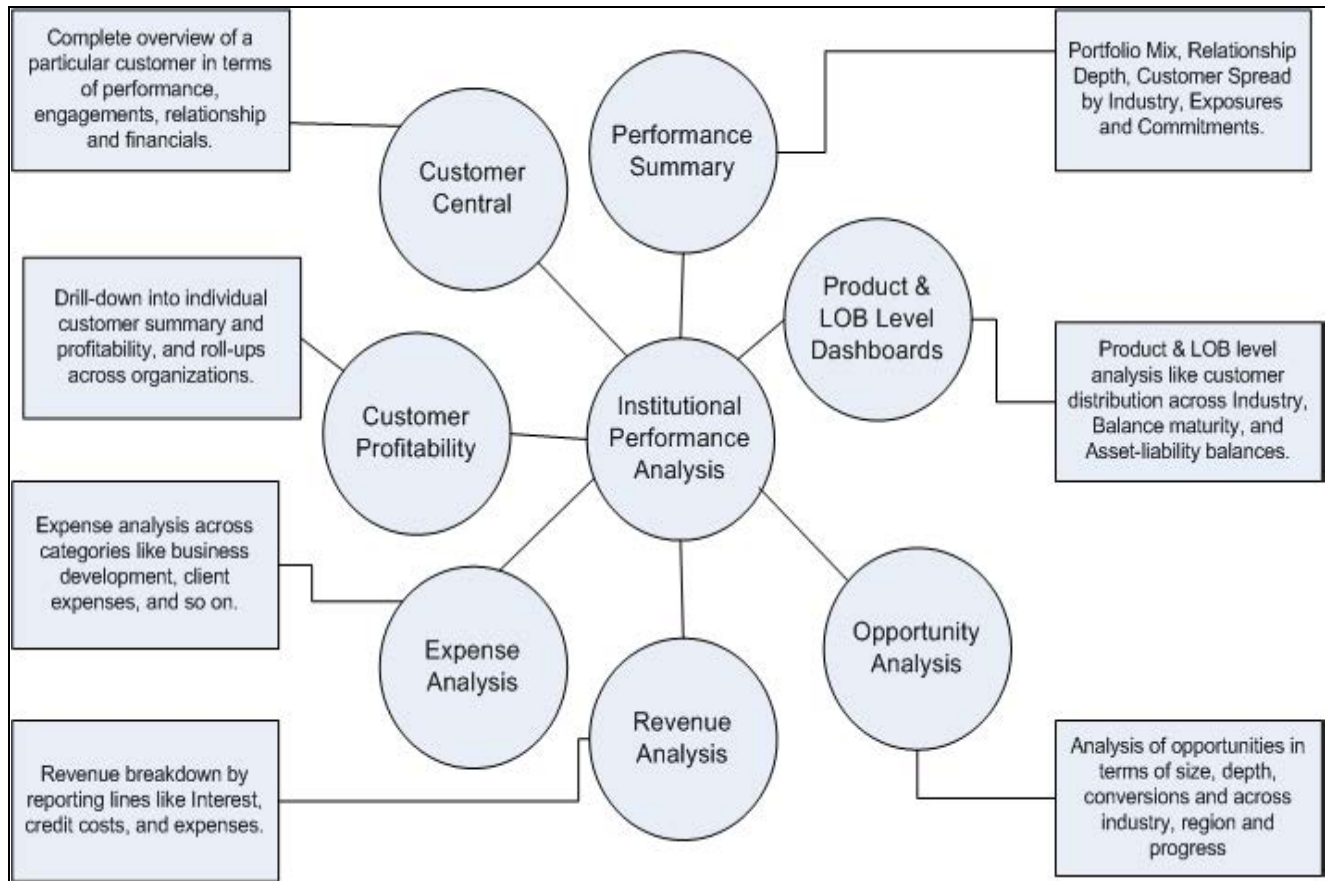


Figure 1. Product Objectives of OFSIPA

For details on OFSIPA reports and how OBIEE is being utilized, see *Overview of OFSIPA Reports*.

OFSIPA is designed for OBIEE reading data from relational database. The relational database comprises of various dimensions and facts in the BI data model. OFSIPA is also designed for OBIEE reading data from Essbase cubes, which stores aggregated data. The Essbase cubes are built from the fact data of the BI data model.

OFSIPA 8.0 can be independently licensed and installed to work on top of the OFSAAI 8.0 infrastructure.

Data Flow

Institutional Performance Analytics data model contains the staging tables from which data is loaded in to the dimensions and fact tables. Staging tables include the master staging tables, detail staging tables, staging product processor tables, and so on. The user has to populate data into these staging tables.

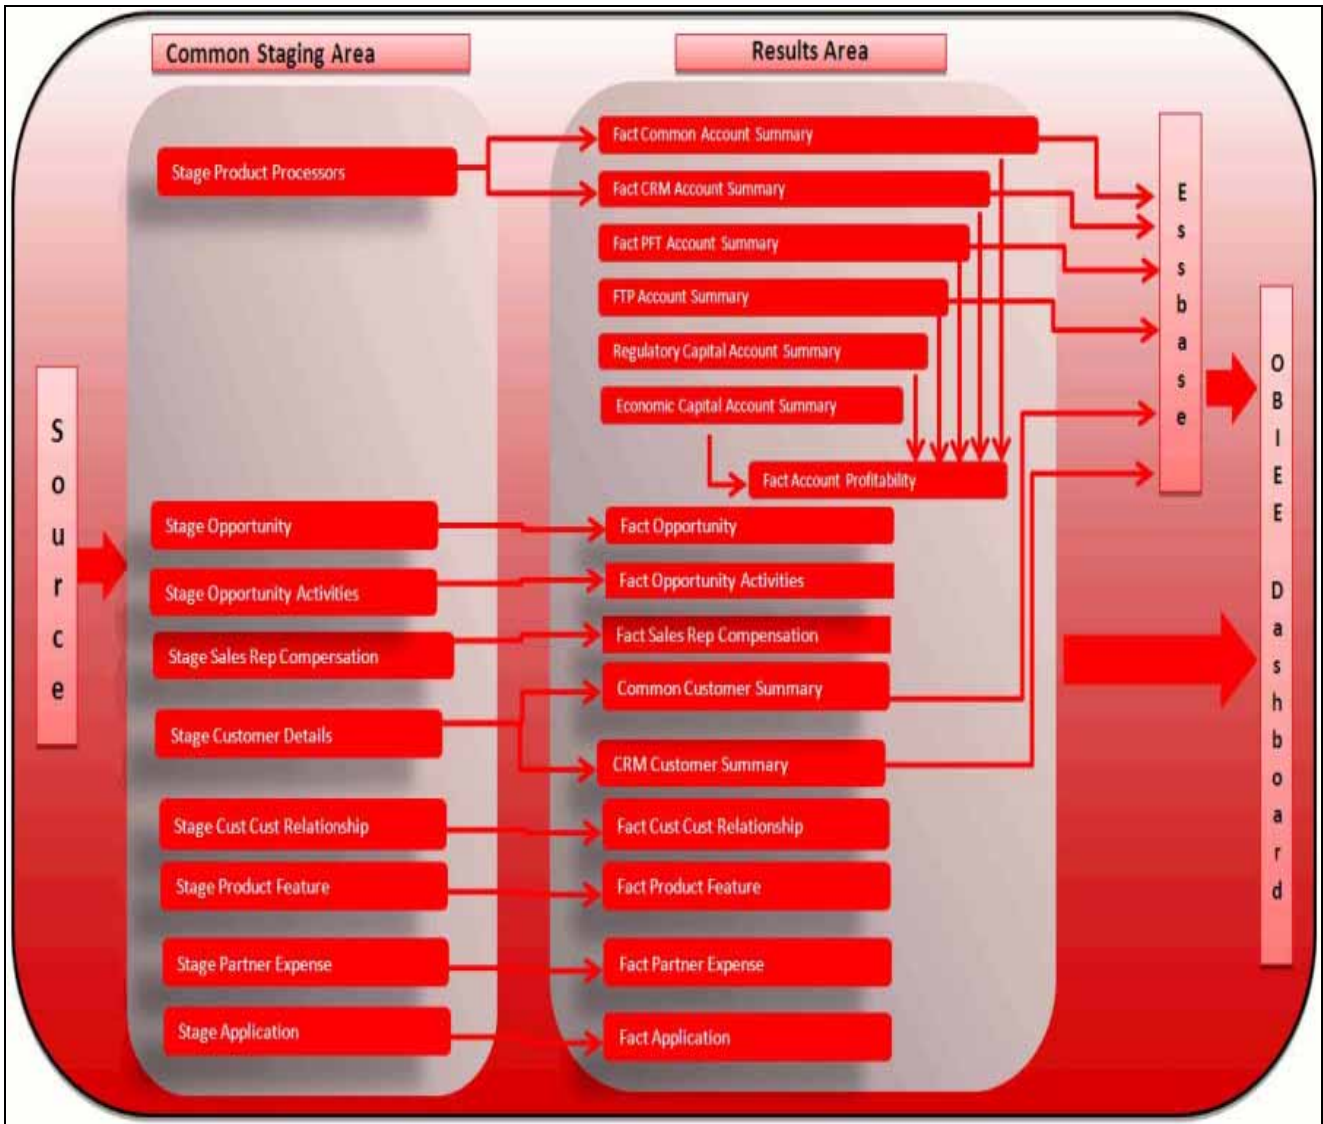


Figure 2. Staging Tables

Dimension Data Flow

Dimension data in OFSIPA application is loaded from staging master tables using the Slowly Changing Dimensions (SCD) process. Data from source systems can be loaded into staging through flat file or source system interfaces. SCD process tracks the changes in the dimensional attributes and loads data into dimension tables. Examples of dimension tables that follow the SCD process are Product, Customer Type, Customer, and so on.

Some dimensions are static or maintained internally within the application and are not expected as a download from source system. Examples of such dimensions are Reporting Line. These dimensions are maintained through the AMHM (Attribute Member Hierarchy Maintenance) component of OFSAAI or through other framework components like DEFI.

Following are the list of Dimensions used in OFSIPA:

Table 1. OFSIPA Dimensions

Dimension Entity Name	Staging Entity Name(s)	Loading/Maintenance method
Account Status Dimension	Stage Account Status Master	SCD
Application Reject Reasons Dimension	Stage Application Reject Reason Master	SCD
Application Type Dimension	Stage Application Type Master	SCD
Attrition Dimension	Stage Attrition Reason Master	SCD
Account Management Dimension	Stage Account Mgmt Master	SCD
Country Dimension	Stage Country Master	SCD
Credit Center Dimension	Stage Credit Center Master	SCD
Credit Officer Dimension	Stage Credit Officer Master	SCD
Customer Dimension	Stage Customer Master	DT
Customer Type Dimension	Stage Customer Type Master	SCD
Decision Status Dimension	Stage Decision Status Master	SCD
Deviation Reasons Dimension	Stage Deviation Reason Master	SCD
Education Dimension	Stage Customer Education Master	SCD
Geography Dimension	Stage Geography Master	SCD
Industry Dimension	Stage Industry Master	SCD
Management Dimension	Stage Account Mgmt Master	SCD
Migration Reasons Dimension	Stage Migration Reason Master	SCD
Offer Dimension	Stage Offer Master	SCD
Opportunity Dimension	Stage Opportunity	SCD
Opportunity Activity Type Dimension	Stage Activity Type Master	SCD
Organization Structure Dimension	Stage Organization Structure Dimension	SCD
Partner Dimension	Stage Partner Master	SCD
Product Dimension	Stage Product Master	SCD
Product Feature Dimension	Stage Product Feature Master	SCD

Table 1. OFSIPA Dimensions

Dimension Entity Name	Staging Entity Name(s)	Loading/Maintenance method
Product Type Dimension	Stage Product Type Master	SCD
Prospect Dimension	Stage Prospect Master	SCD
Reason Dimension	Stage Opportunity Win Loss Reason Master	SCD
Retention Offer Type Dimension	Stage Retention Offer Master	SCD
Sales Representative Dimension	Stage Sales Rep Master	SCD
Vendor Dimension	Stage Vendor Master	SCD
Vintage Dimension	Stage Vintage Master	SCD
Line of Business Dimension	Stage Line of Business Master	SCD
Common Chart Of Accounts Dimension	Common COA Dimension Members, Common COA Hierarchies, Common COA Member Attributes, Common COA Member Translations	SCD
General Ledger Account Dimension	General Ledger Member Attributes, General Ledger Dimension Members, General Ledger Hierarchies, General Ledger Member Translations	SCD
DIM_ORG_UNIT	Organization Unit Member Attributes, Organization Unit Dimension Members, Organization Unit Hierarchies, Organization Unit Member Translations	SCD
Product Dimension	Product Member Attributes, Product Dimension Members, Product Hierarchies, Product Member Translations	SCD
Reporting Line Dimension	Reporting Line Dimension Members, Reporting Line Member Translation, Reporting Line Member Attributes, Reporting Line Hierarchies	AMHM/DT

Table 1. OFSIPA Dimensions

Dimension Entity Name	Staging Entity Name(s)	Loading/Maintenance method
Band Dimension	Band Dimension Members, Band Member Translation, Band Member Attributes	AMHM/SCD Note: When updating DIM_BANDS, the lower bound of one band can not start with the upper bound of the previous band. For example, for a Customer Balance band, if the upper bound of the first band is 10,000 USD, the lower bound of the next band must start with 10,000.01 USD, if the dataload convention being followed is for two decimal points. In case of integer bands, for example, Number of Transactions; if the upper bound of a band ends with 5, the lower bound of the next band must begin with 6.
Region Dimension		Direct Load
Acquisition Channel Dimension	Stage Sales Channel Master	SCD
Instrument Category Dimension		Seeded
Currency Dimension		Seeded
Consolidation Dimension		Seeded
Calendar Dimension		DT
Account Dimension	Stage LC Contracts	SCD
	Stage Commitment Contracts	SCD
Party Dimension	Stage Party	SCD
Location Dimension	Stage Location Master	SCD

Table 1. OFSIPA Dimensions

Dimension Entity Name	Staging Entity Name(s)	Loading/Maintenance method
Account Dimension	Stage Stage OD accounts	SCD
	Stage Stage TD contracts	SCD
	Stage Stage Trusts	SCD
	Stage Stage Loan Contracts	SCD
	Stage Stage Mutual Funds	SCD
	Stage Bills Contracts	SCD
	Stage CASA Accounts	SCD
	Stage Guarantees	SCD
	Stage Stage leases contracts	SCD
	Stage Stage mm contracts	SCD
	Stage Annuity Contracts	SCD
	Stage Borrowings, Stage Card Accounts	SCD
	Stage Investments	SCD

Some of the stage data can also come from master data management interfaces. In such a case, data from interface is loaded into staging interface tables and SCD is run on the interface tables. Mapping of dimensional attributes to staging can be obtained by querying `SYS_STG_JOIN_MASTER` and `SYS_TBL_MASTER` table in the atomic schema.

Key dimensions for reporting

The following key dimensions are required for OFSIPA reporting as these dimensions are being directly consumed by the reports.

- Opportunity Activity Type Dimension
- Attrition Dimension
- Bands Dimension
- Acquisition Channel Dimension
- Consolidation Dimension
- Currency Dimension
- Customer Dimension
- Customer Type Dimension
- Date Dimension
- Geography Dimension
- Account Dimension
- Industry Dimension

- Line of Business Dimension
- Account Management Dimension
- Migration Reasons Dimension
- Dimension
- Organization Structure Dimension
- Org Unit BI Hierarchy
- Partner Dimension
- Product Dimension
- Product Type Dimension
- Product Family Holding Dimension
- Prospect Dimension
- Reporting Line Dimension
- Run Dimension
- Sales Representative Dimension
- Sales Stage Dimension
- Vintage Dimension
- Location Dimension

Fact Data Flow

Most of the Fact tables are mapped to staging counterparts through Table to Table (T2T) mappings. Data from source systems can be loaded into staging through flat file or source system interfaces. T2T process then loads data to fact tables. Examples include Fact Common Account Summary, Fact Opportunity, and so on. Some of the Fact tables are loaded with processed fact information from other fact tables. Examples include Fact CRM Customer Summary, Fact Account Profitability, and so on.

Table 2. Fact Table Flow

Fact Entity Name	Source	Source Entities	Method of populating measures
Fact Common Account Summary	Stage	Stage Annuity Contracts, Stage Bill Contracts, Stage Borrowings, Stage Cards, Stage CASA Accounts, Stage Guarantees, Stage Investments, Stage LC Contracts, Stage Leases Contracts, Stage Loan Contracts, Stage Money Market Contracts, Stage Over Draft Accounts, Stage Term Deposit, Stage Trusts, Stage Commitment Contracts, Stage Mutual Funds	T2T
Fact PFT Account Summary	Instrument	Annuity Contracts, Borrowings, Checking and Savings Account, Credit Cards, Credit Lines, Guarantees, Investments, Leases, Loan Contracts, Mortgages, Term Deposits, Trusts Stage Mutual Funds	T2T
Fact FTP Account Summary	Instrument	Annuity Contracts, Borrowings, Checking and Savings Account, Credit Cards, Credit Lines, Guarantees, Investments, Leases, Loan Contracts, Money Market Contracts, Mortgages, Term Deposits, Trusts Stage Mutual Funds	T2T

Table 2. Fact Table Flow

Fact Entity Name	Source	Source Entities	Method of populating measures
Fact CRM Account Summary	Stage	Stage Annuity Contracts, Stage Bill Contracts, Stage Borrowings, Stage Cards, Stage CASA Accounts, Stage Guarantees, Stage Investments, Stage LC Contracts, Stage Leases Contracts, Stage Loan Contracts, Stage Money Market Contracts, Stage Over Draft Accounts, Stage Term Deposit Contracts, Stage Trusts, Stage Commitment Contracts	T2T
Fact Common Customer Summary	Stage	Stage Customer Details, Stage Party Rating Details, Stage Party Financials	T2T
Fact CRM Customer Summary	Stage and Fact	Stage Customer Master, Stage Customer Details, Fact Common Account Summary	T2T
Fact Account Feature Map	Stage	Stage Account Feature Map	T2T
Fact Customer to Customer Relationship	Stage	Stage Customer to Customer Relationships	T2T
Fact Opportunity	Stage	STG_OPPORTUNITY	T2T
FCT_OPPORTUNITY_ACTIVITY	Stage	STG_OPPORTUNITY_ACTIVITY	T2T
Fact Account Profitability	Fact	Fact Common Account Summary, Fact FTP Account Summary, Fact PFT Account Summary, Fact Regulatory Capital Account Summary, Fact Economic Capital Account Summary	DT
Fact Account Customer Relationship	Stage	Stage Customer Relationships	T2T
Fact Account Manager Relationship	Stage	Stage Account Manager Relationship	T2T
Fact Forecast And Plan Data	Stage	Stage Forecast and Plan Data	
Exchange Rate History	Stage	Stage Exchange Rates	T2T
Exchange rates	View	View on Stage Exchange Rates	T2T

Table 2. Fact Table Flow

Fact Entity Name	Source	Source Entities	Method of populating measures
Fact Party Account Role Map	Stage	Stage Party Account Role Map	T2T
Fact Party Financials	Stage	Stage Party Financials	T2T
Fact Account Segment MOB Summary	Fact	Fact Account Profitability, Fact Common Account Summary, Fact Account Segment Score	DT
Fact Account Segment Score	Fact	Fact Common Account Summary	DT

The OFSIPA uses some materialized views registered as "Derived Entity", that has to be refreshed as and when the dependent table has fresh data. The MVs can be refreshed by running the batches crated for the purpose.

The list of Derived Entity and the dependent objects can be found in the following table. Summary, Fact Account Profitability, and so on.

Table 3. Derived Entity and Dependent Objects

Materialized View	Referenced Name	Referenced Object Type
ACNTSMRM	FCT_COMMON_ACCOUNT_SUMMARY	Table
	FCT_CRM_ACCOUNT_SUMMARY	Table
CUSTDETM	DIM_CUSTOMER	Table
	DIM_CUSTOMER_TYPE	Table
	DIM_GENDER	Table
	FCT_COMMON_CUSTOMER_SUMMARY	Table
FCSTCUSA	VW_ACCT_VAL_FCST_CUSTAGG_IPA	Table
FCSTLTVM	VW_FORECAST_LTV_IPA	Table
FCSTREPA	VW_ACCT_VAL_FCST_REPAGG_IPA	Table
FSIUSRD	FSI_USER_DATA_ACCESS	Table
MGMPFTM	ACNTSMRM	Table
	FCT_ACCOUNT_MGR_REL	Table
	FCT_ACCOUNT_PROFITABILITY	Table

Table 3. Derived Entity and Dependent Objects

Materialized View	Referenced Name	Referenced Object Type
MVCACPRO	A_DIM_REP_CURRENCY	Table
	DIM_ACCOUNT	Table
	DIM_CONSOLIDATION	
	DIM_CURRENCY	Table
	DIM_CUSTOMER	Table
	DIM_CUSTOMER_TYPE	Table
	DIM_DATES	Table
	DIM_LOB	Table
	DIM_ORG_UNIT	Table
	DIM_PRODUCT	Table
	DIM_REP_LINE	Table
	FCT_COMMON_CUSTOMER_SUMMARY	Table
	FCT_CRM_ACCOUNT_SUMMARY	Table
	MVUSRACC	Table
MVCCUSAG	A_DIM_REP_CURRENCY	Table
MGMPFTM	DIM_ACCOUNT	Table
MVCCUSAG	DIM_CONSOLIDATION	Table
	DIM_CURRENCY	Table
	DIM_CUSTOMER	Table
	DIM_CUSTOMER_TYPE	Table
	DIM_DATES	Table
	DIM_LOB	Table
	DIM_ORG_UNIT	Table
	DIM_PRODUCT	Table
	DIM_REP_LINE	Table
	FCT_ACCOUNT_PROFITABILITY	Table
	FCT_COMMON_CUSTOMER_SUMMARY	Table
	FCT_CRM_ACCOUNT_SUMMARY	Table
	MVUSRACC	Table

Table 3. Derived Entity and Dependent Objects

Materialized View	Referenced Name	Referenced Object Type
MVCPROAG	A_DIM_REP_CURRENCY	Table
	DIM_ACCOUNT	Table
	DIM_CONSOLIDATION	Table
	DIM_CURRENCY	Table
	DIM_CUSTOMER	Table
	DIM_CUSTOMER_TYPE	Table
	DIM_DATES	Table
	DIM_LOB	Table
	DIM_ORG_UNIT	Table
	DIM_PRODUCT	Table
	DIM_REP_LINE	Table
	DIM_VINTAGE	Table
	FCT_ACCOUNT_PROFITABILITY	Table
	FCT_COMMON_CUSTOMER_SUMMARY	Table
	FCT_CRM_ACCOUNT_SUMMARY	Table
MVUSRACC	Table	
MVUSRACC	DIM_ACCOUNT	Table
	FCT_COMMON_ACCOUNT_SUMMARY	Table
	FSIUSRD	Table
USRMGRMV	FSI_M_USER_MANAGER_MAP	Table
WTHREPMV	WITH_REP_LINE_DIRECT_INDIRECT	Table

Execute the batches <INFODOM>_FN_REFRSH_DE - Task1 to <INFODOM>_FN_REFRSH_DE - Task8 for refreshing the derived entities. The DT <INFODOM>_FN_REFRSH_DE is invoked from this task. This function refreshes the derived entities (materialized views) when ever the task is executed.

Note: If user gets *Runtime Exception* error while accessing the **Derived Entity** screen, user is required to update the java setting by adding OFSAAI URI in the Exception Site List.

BI Data Model

The BI data model is a star schema for the fact table FCT_<APPLICATION>_ACCOUNT_SUMMARY.

Following are the subject areas in ERwin data model:

- Fact Account Feature Map

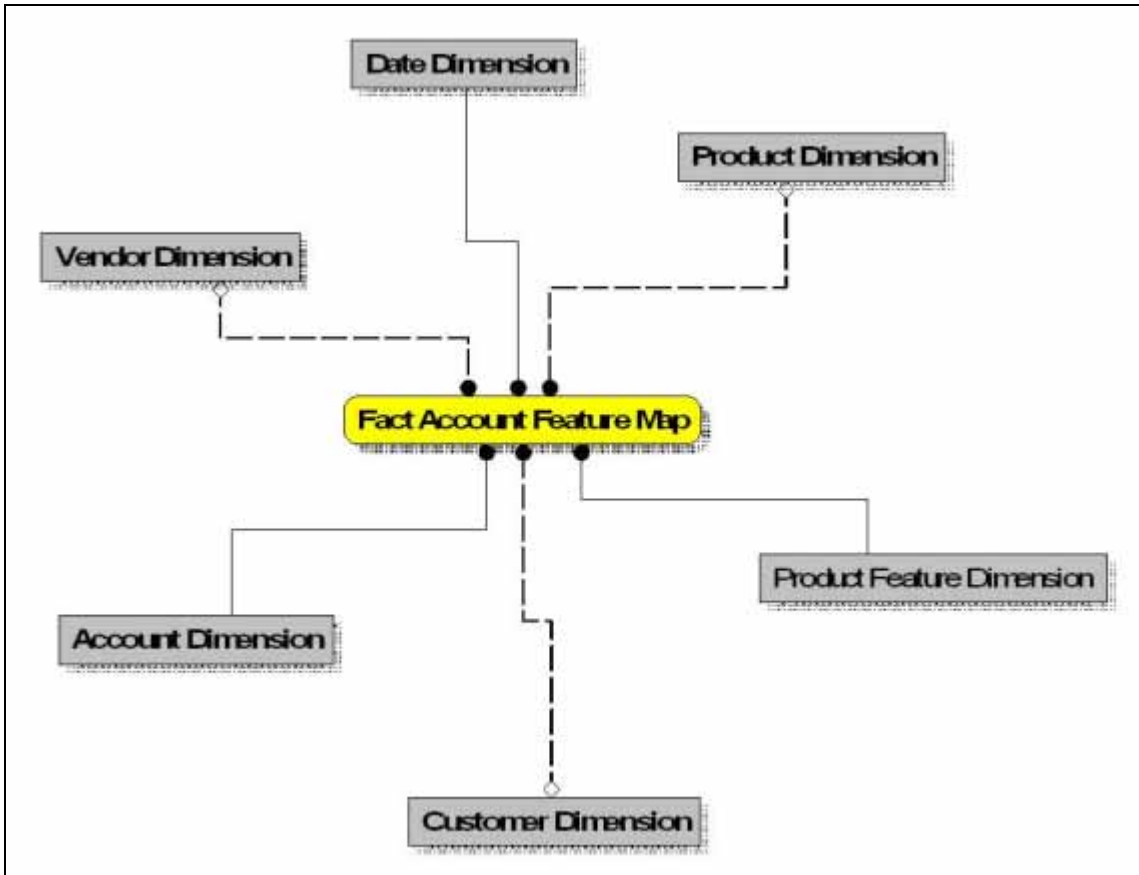


Figure 3. Fact Account Feature Map

- Fact Account Manager Relationship

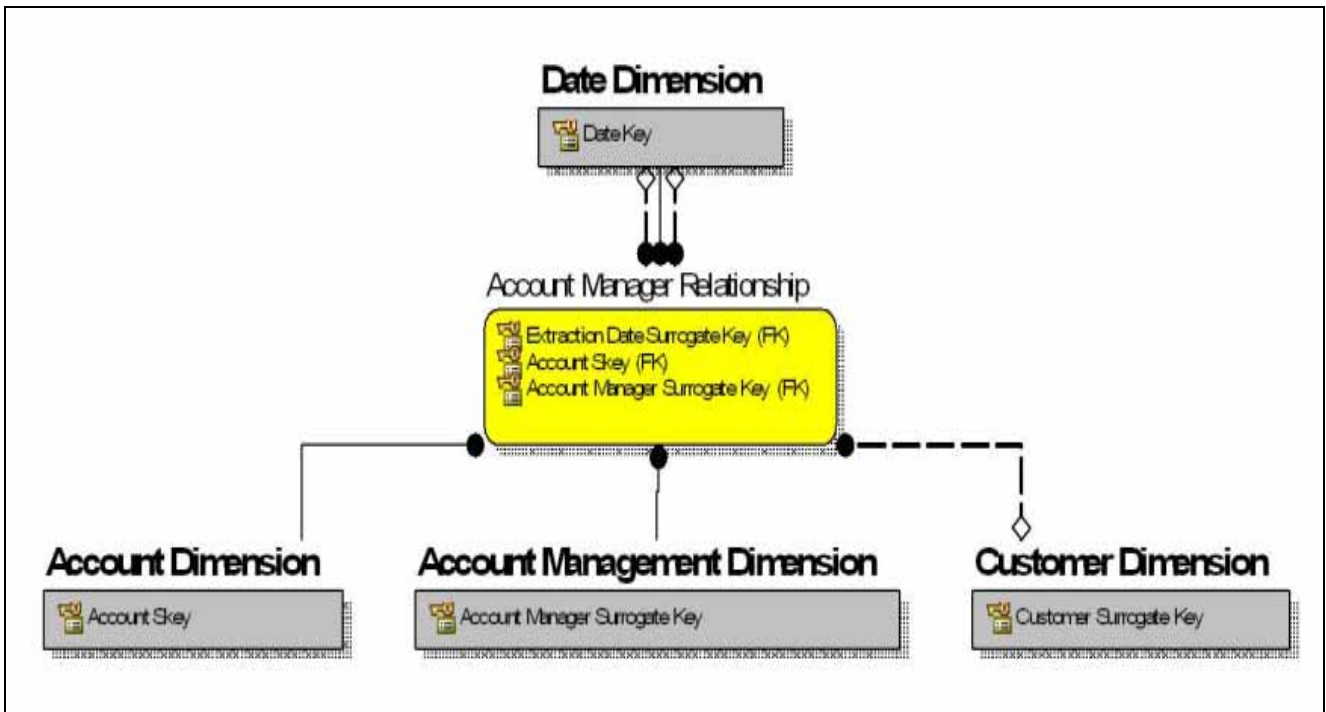


Figure 4. Fact Account Manager Relationship

- Fact Account Party Role

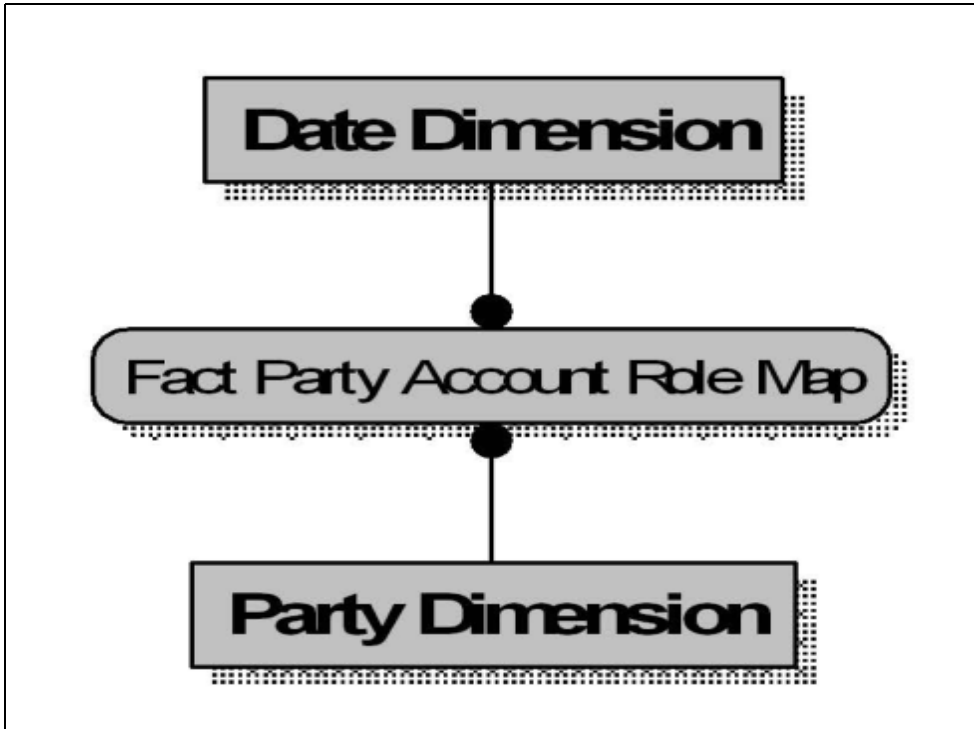


Figure 5. Fact Account Party Role

- Fact Account Profitability

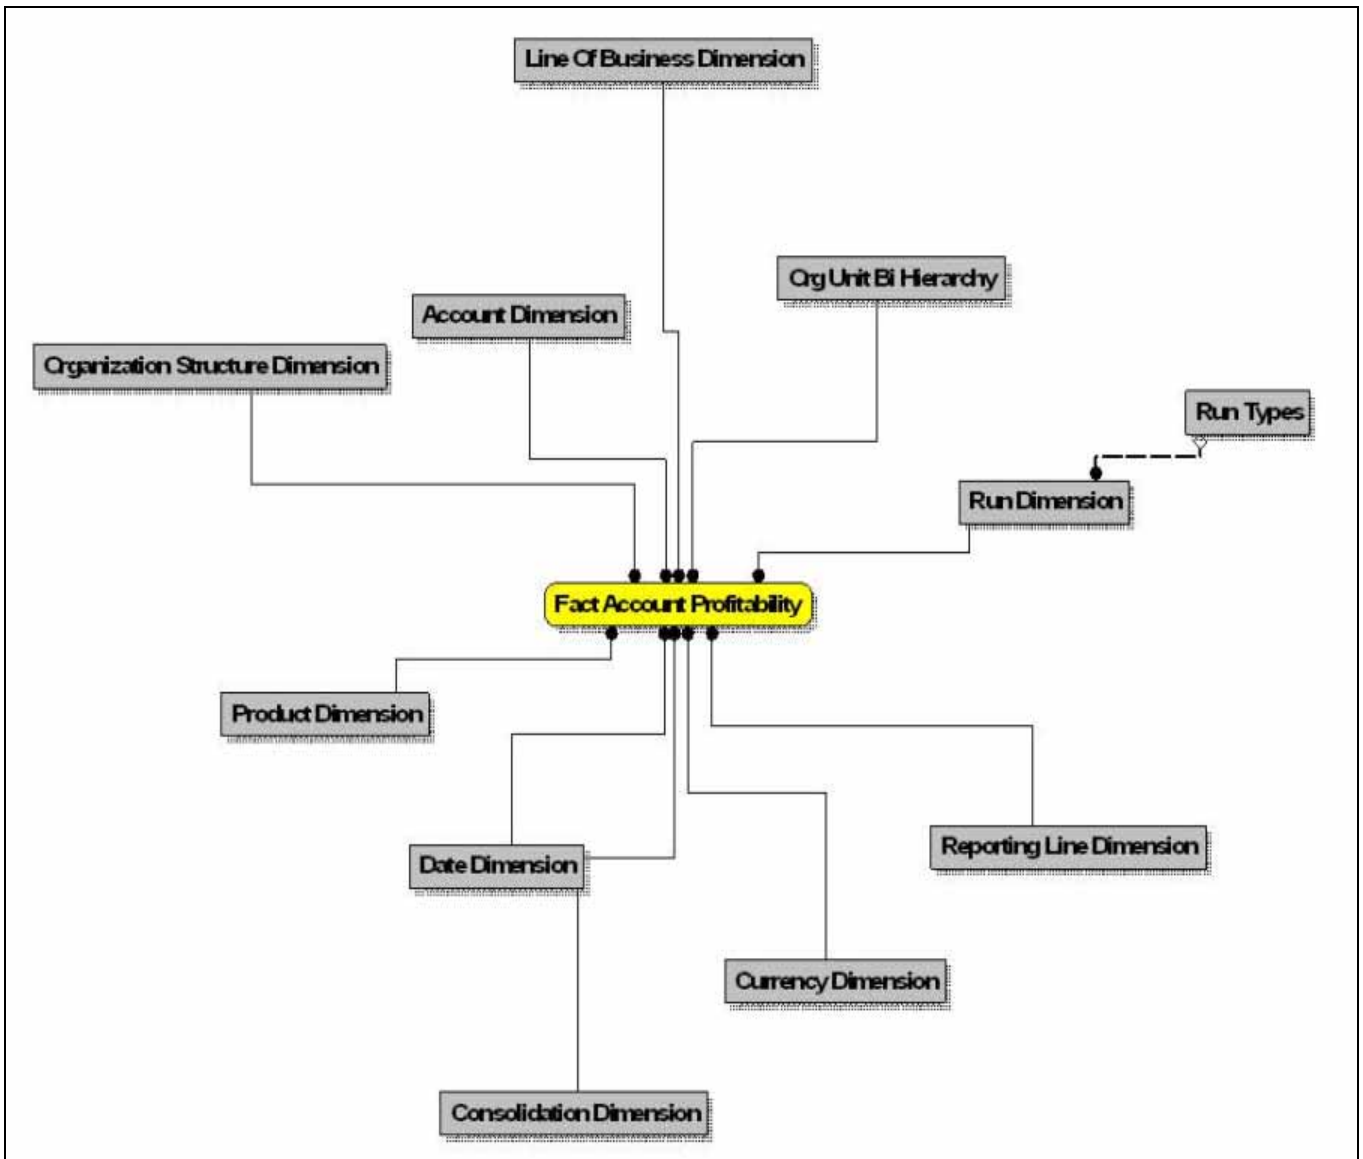


Figure 6. Fact Account Profitability

- Fact Account Segment MOB Summary

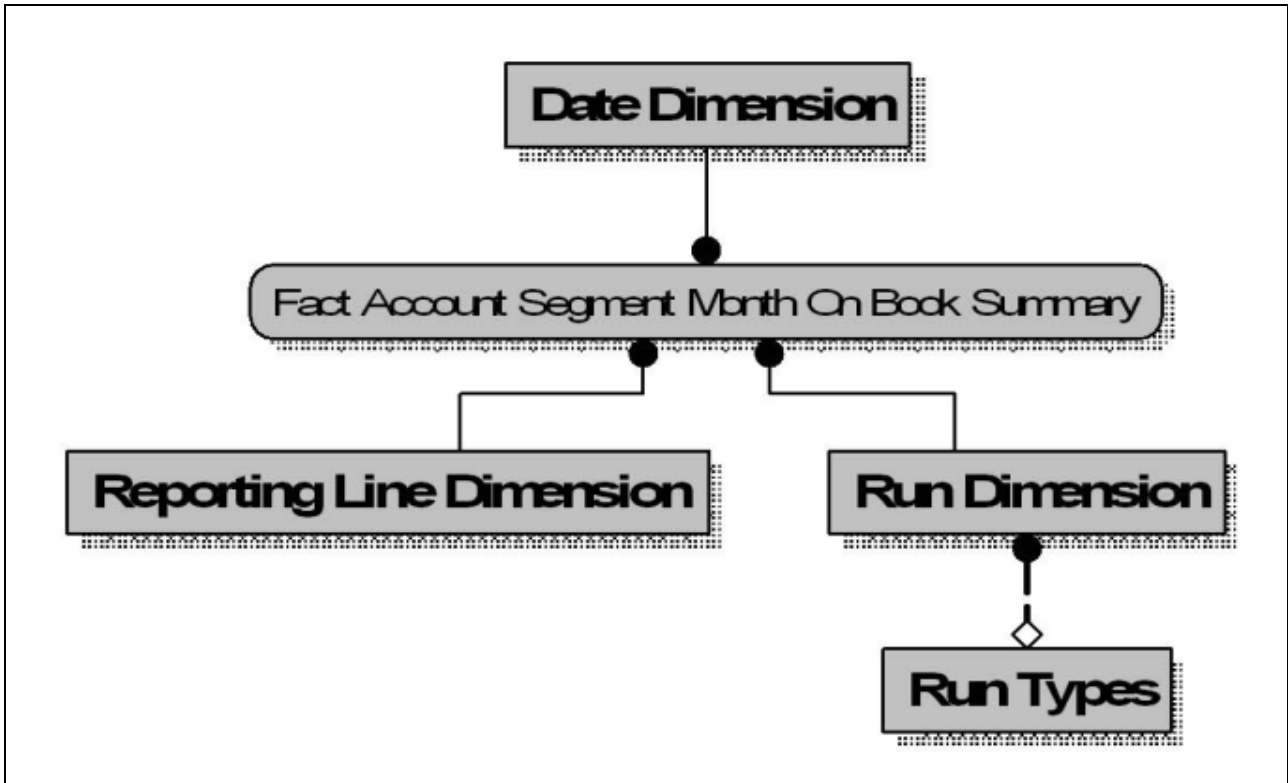


Figure 7. Fact Account Segment MOB Summary

- Fact Account Segment Score

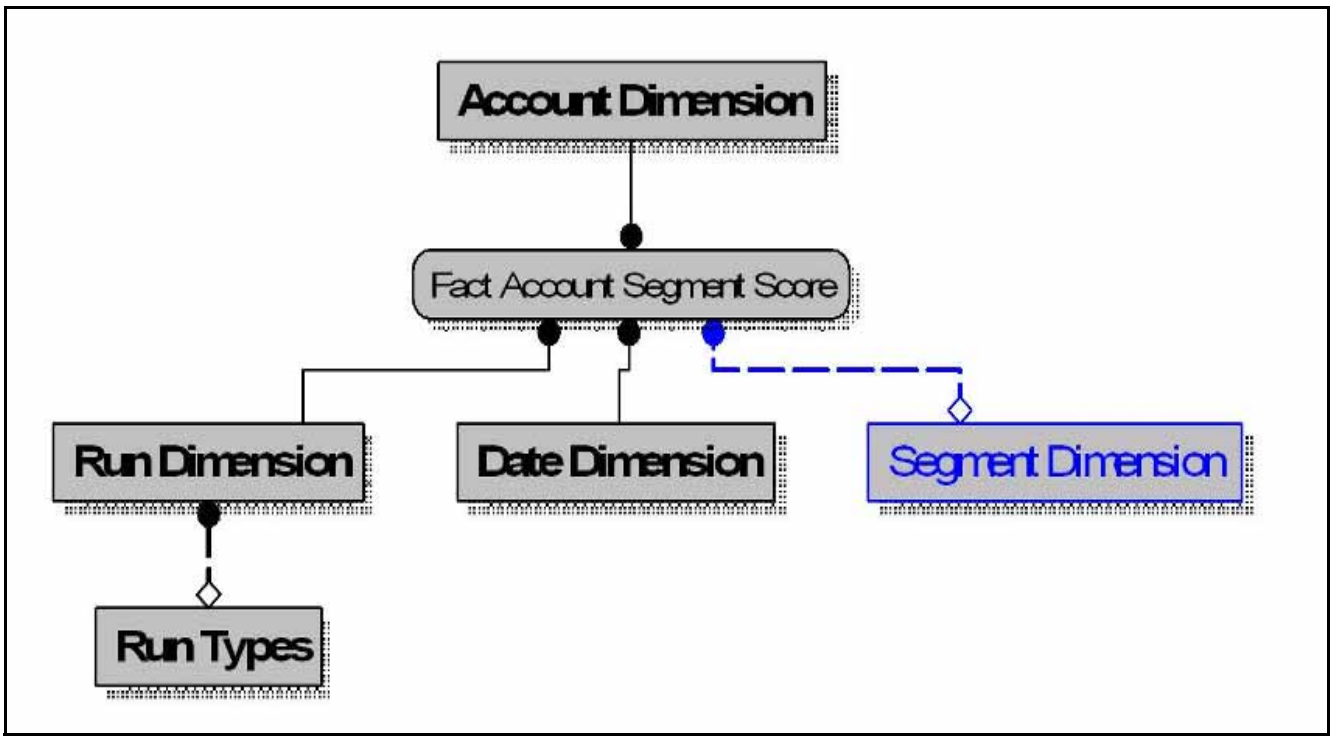


Figure 8. Fact Account Segment Score

- Fact Applications Summary

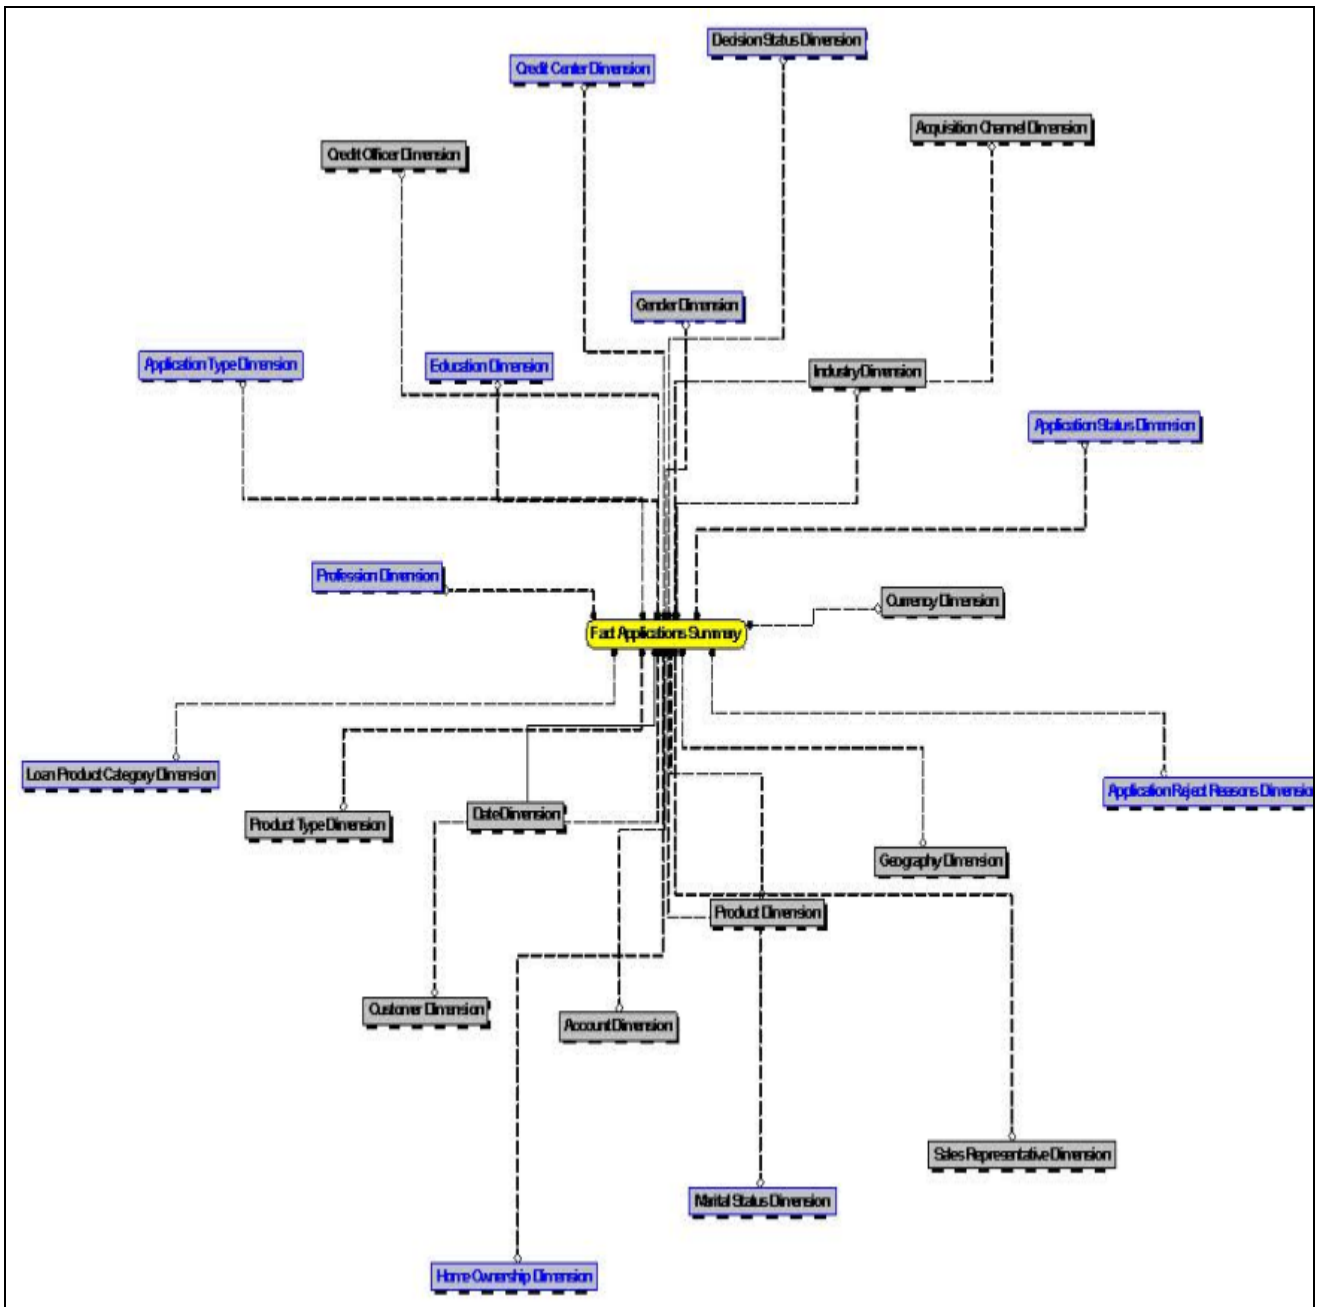


Figure 9. Fact Applications Summary

- Fact Common Account Summary

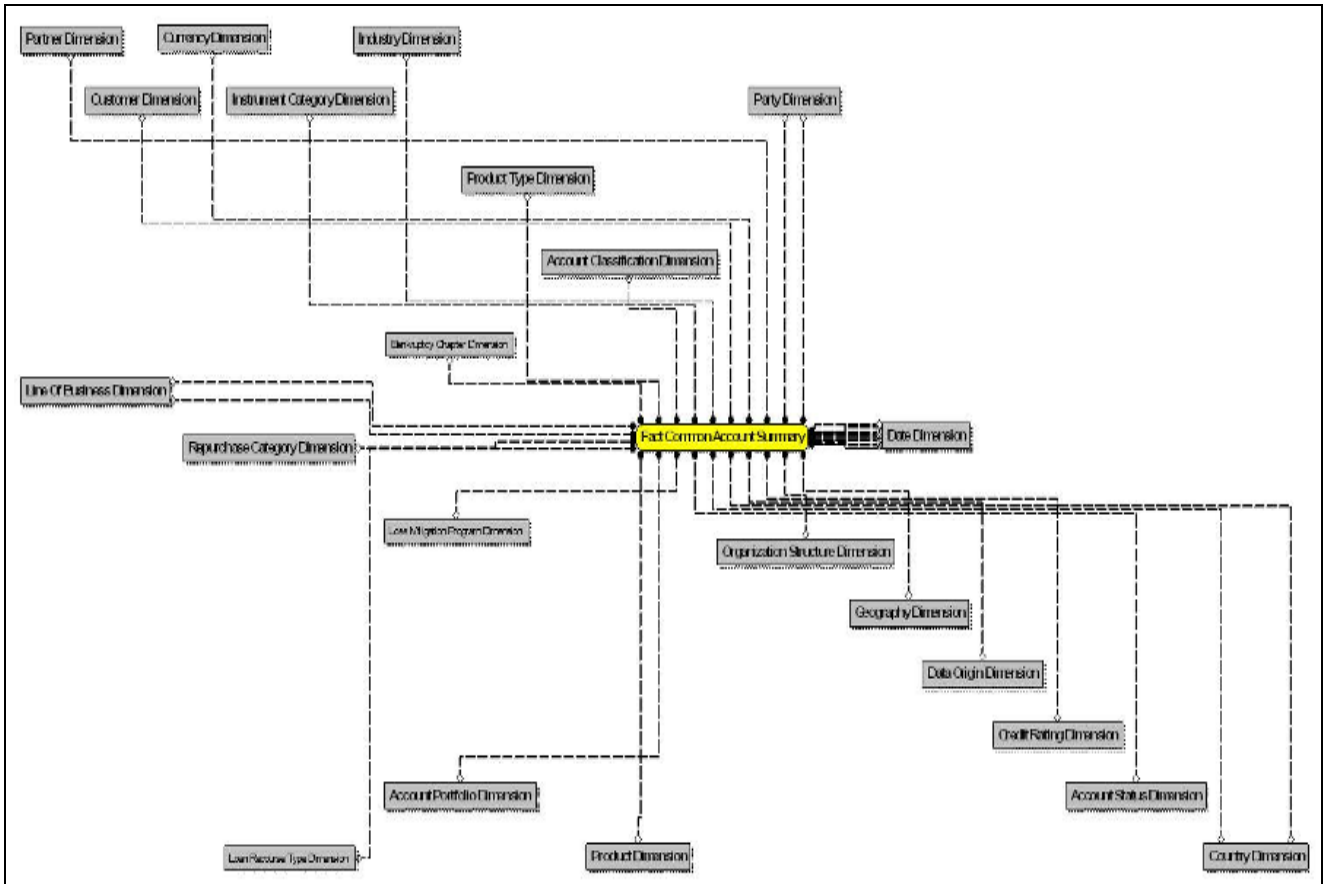


Figure 10. Fact Common Account Summary

- Fact Common Customer Summary

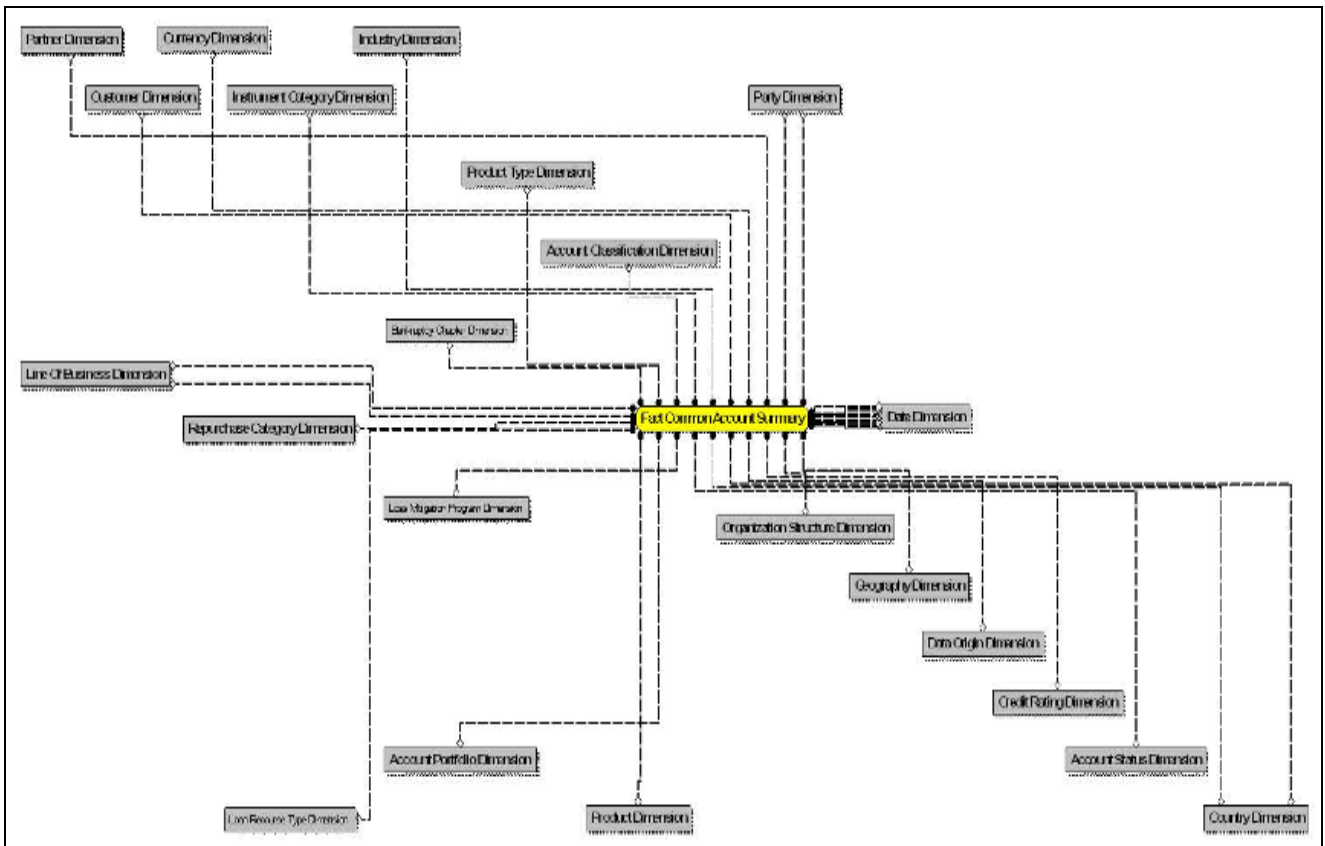


Figure 11. Fact Common Customer Summary

- Fact CRM Account Summary

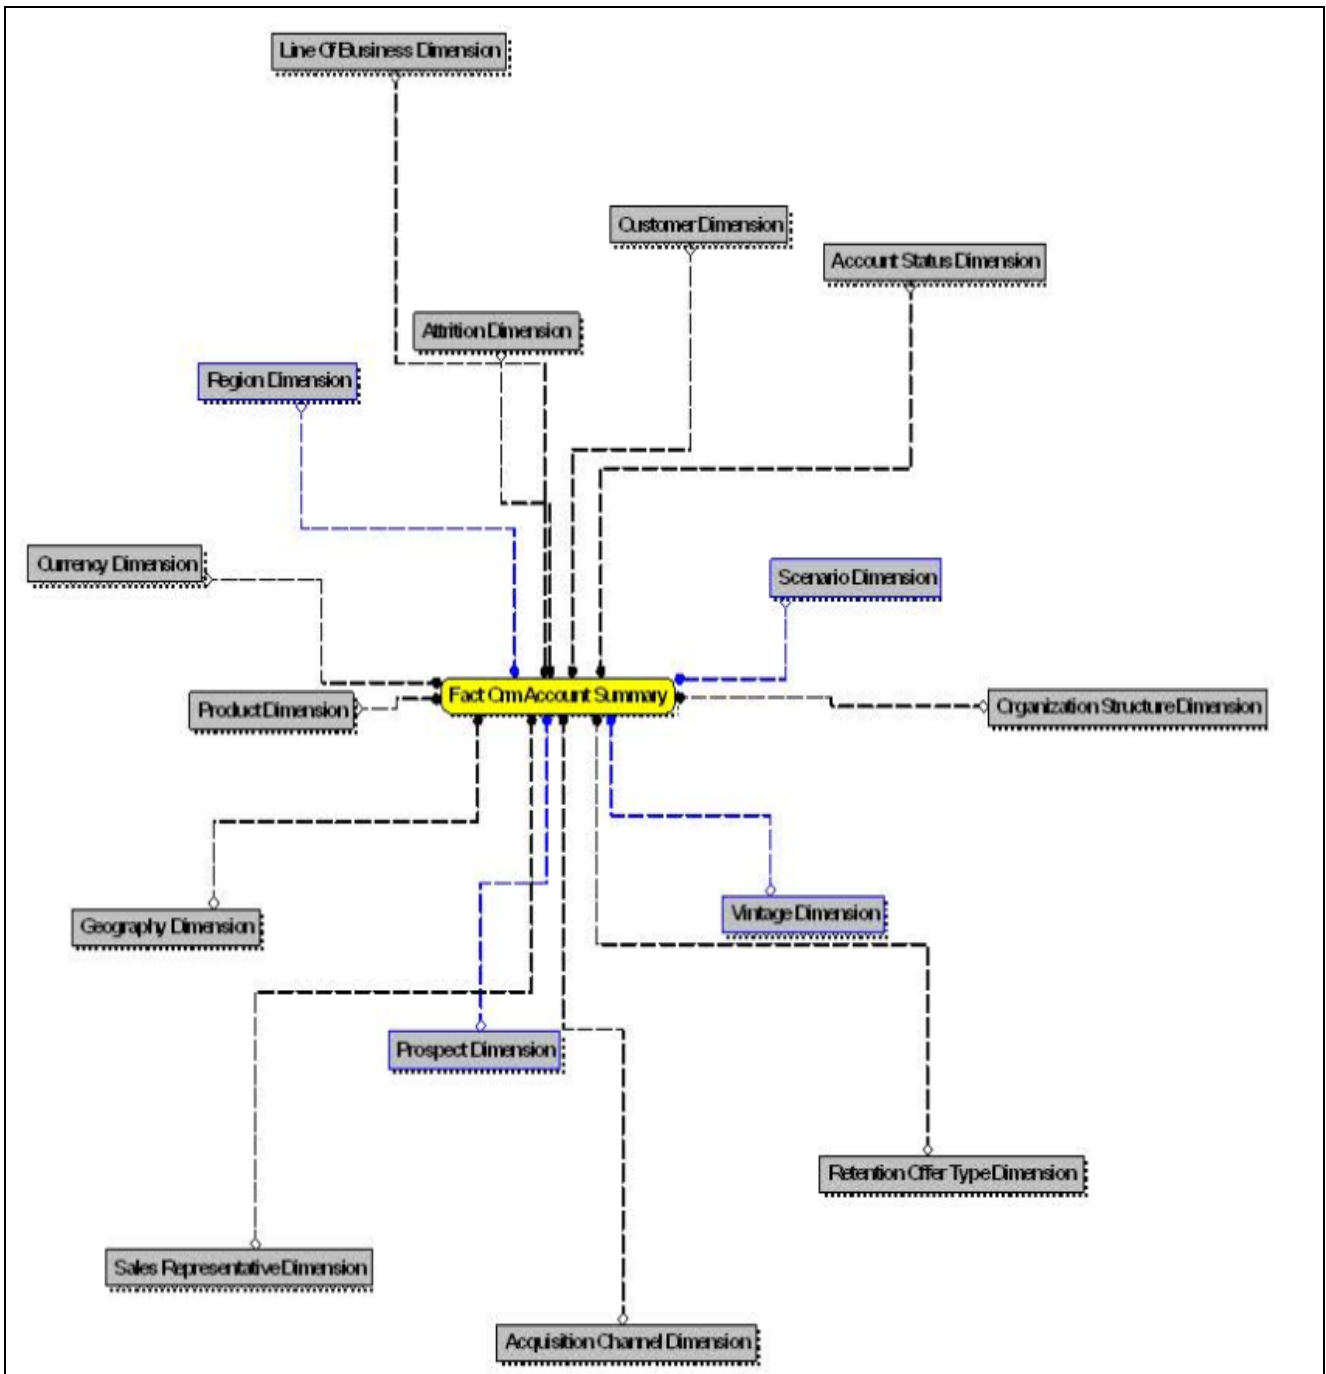


Figure 12. Fact CRM Account Summary

- Fact Cust Cust Relationship

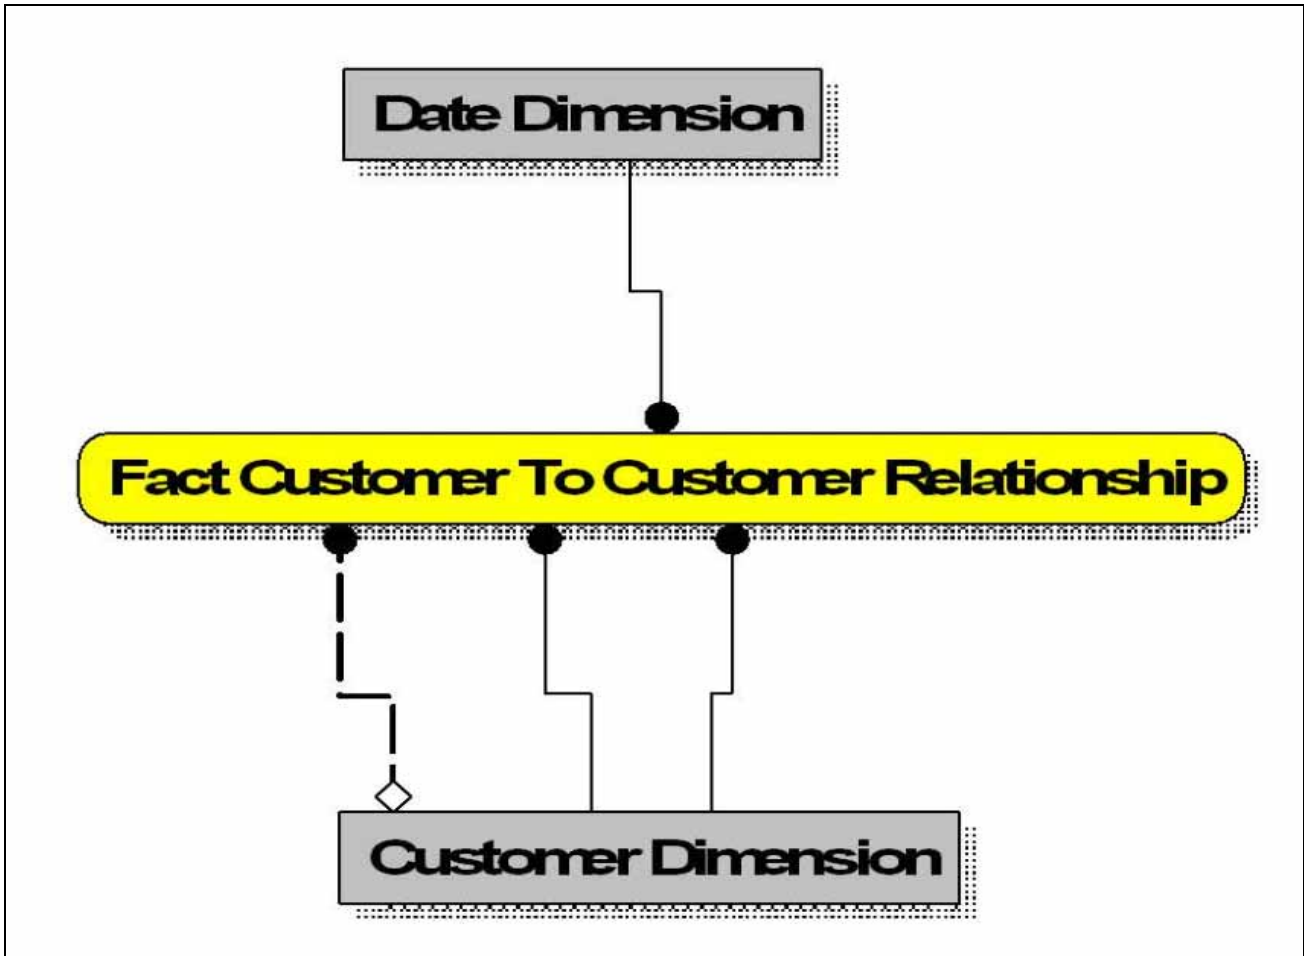


Figure 13. Fact Cust Cust Relationship

- Fact Eco Cap Account Summary

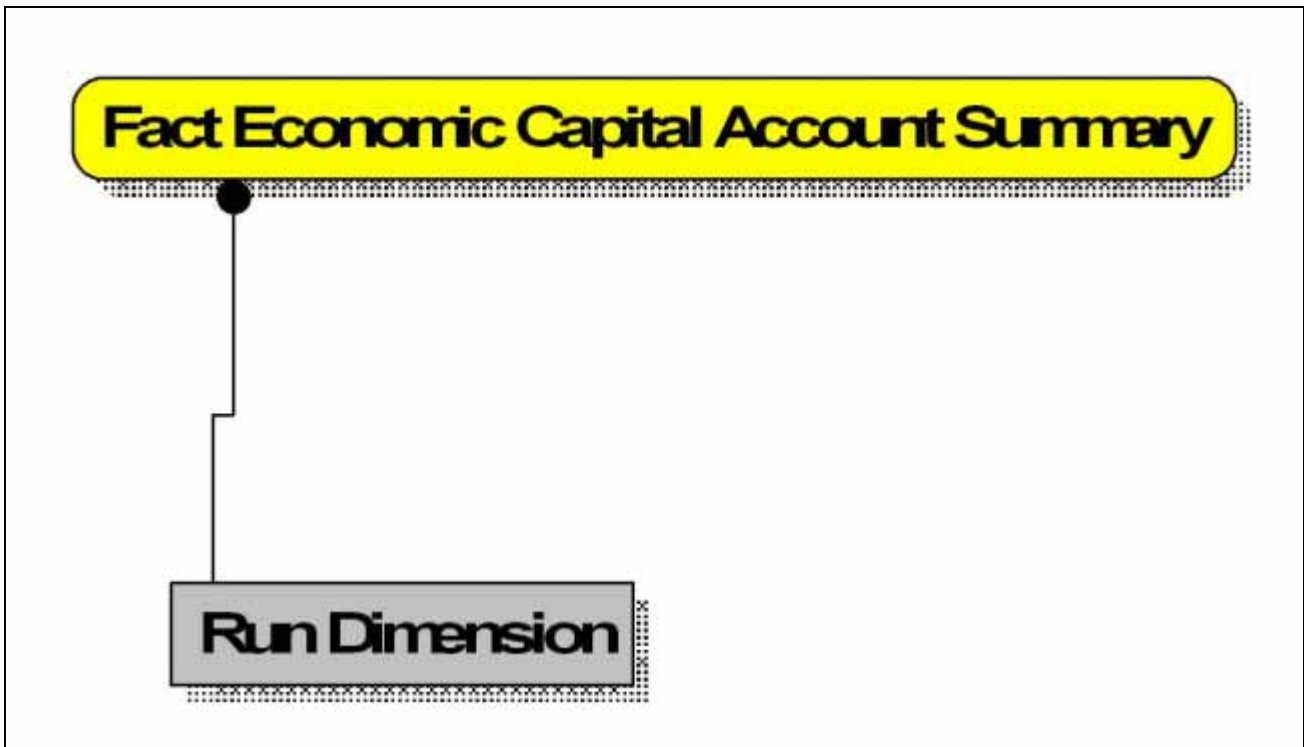


Figure 14. Fact Eco Cap Account Summary

- Fact Opportunity

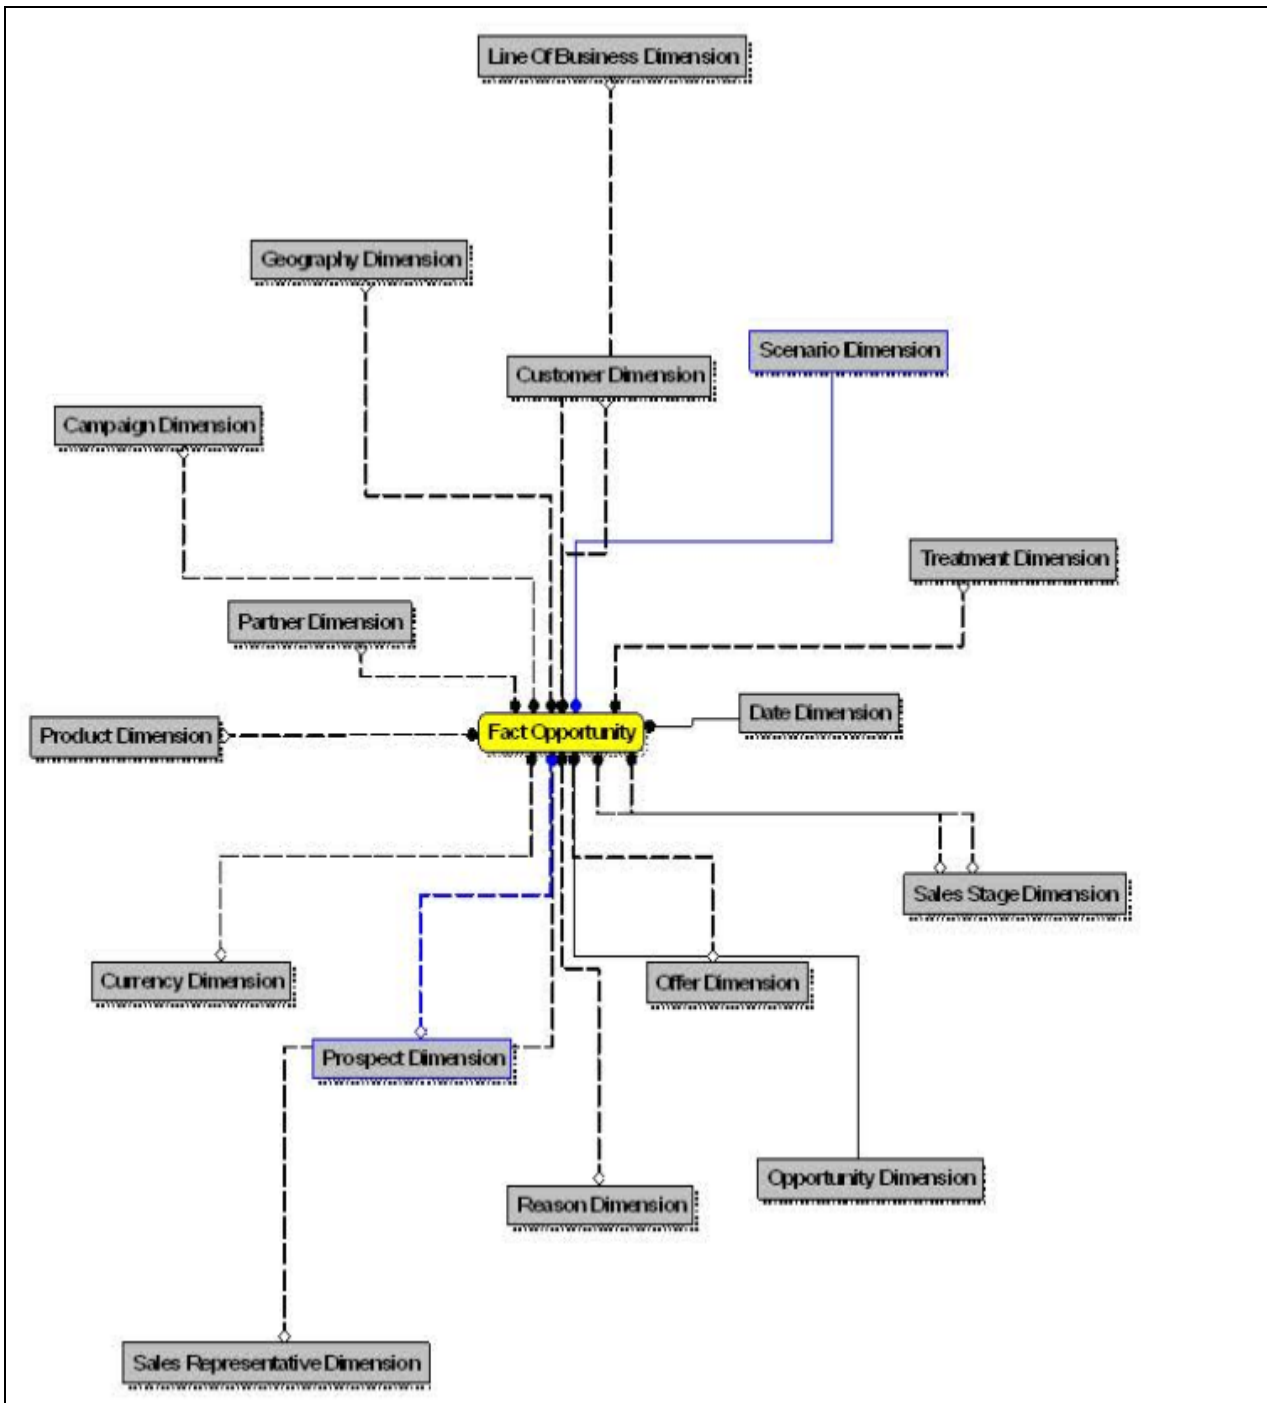


Figure 15. Fact Opportunity

- Fact Opportunity Activity

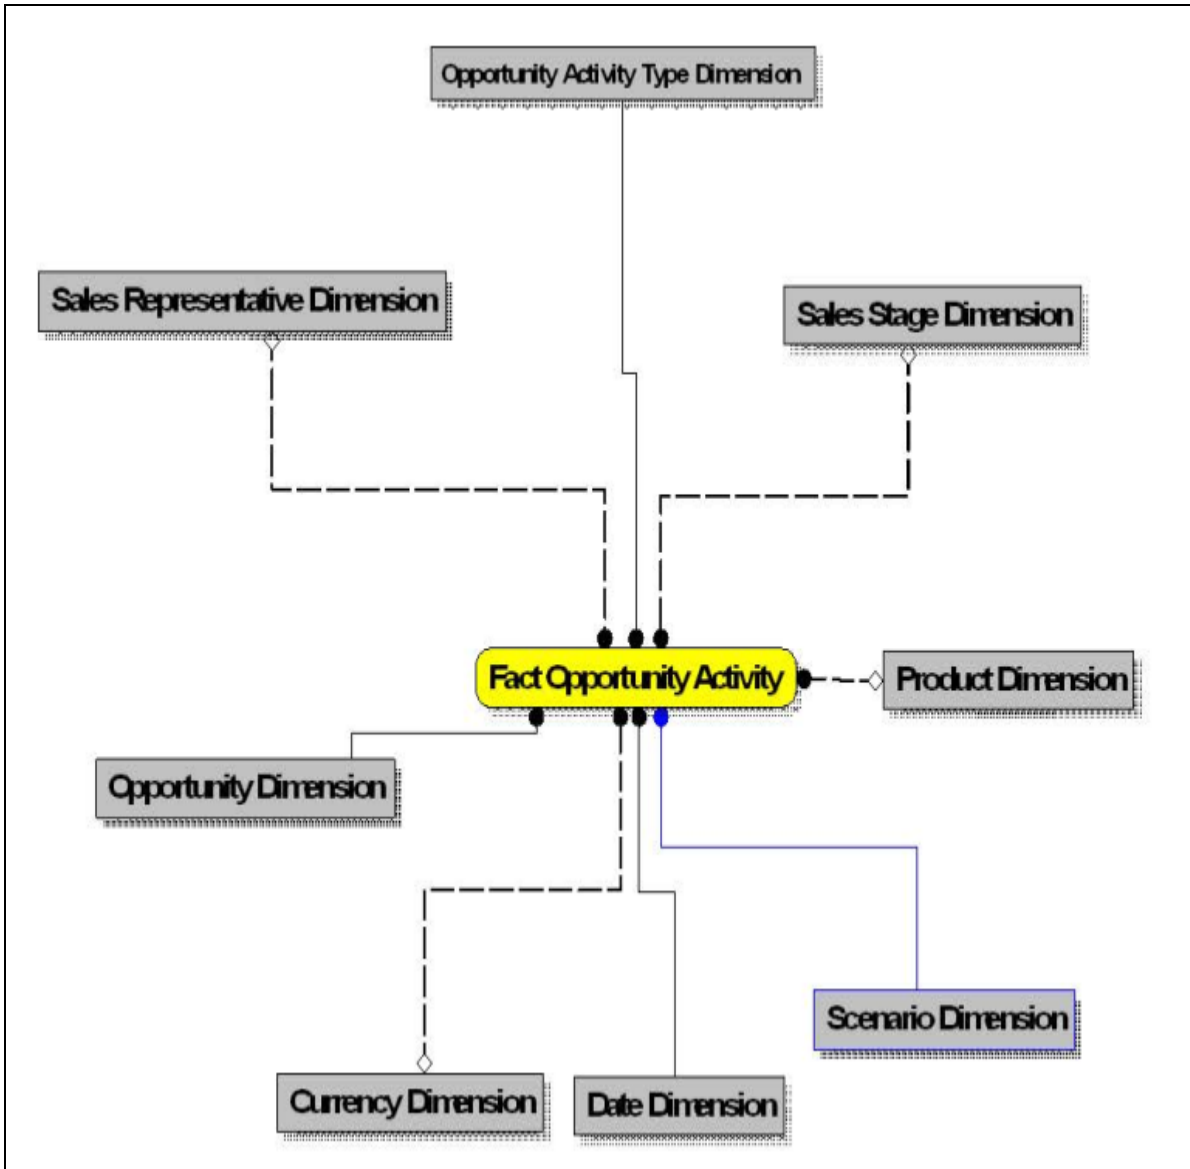


Figure 16. Fact Opportunity Activity

- Fact Reg Cap Account Summary

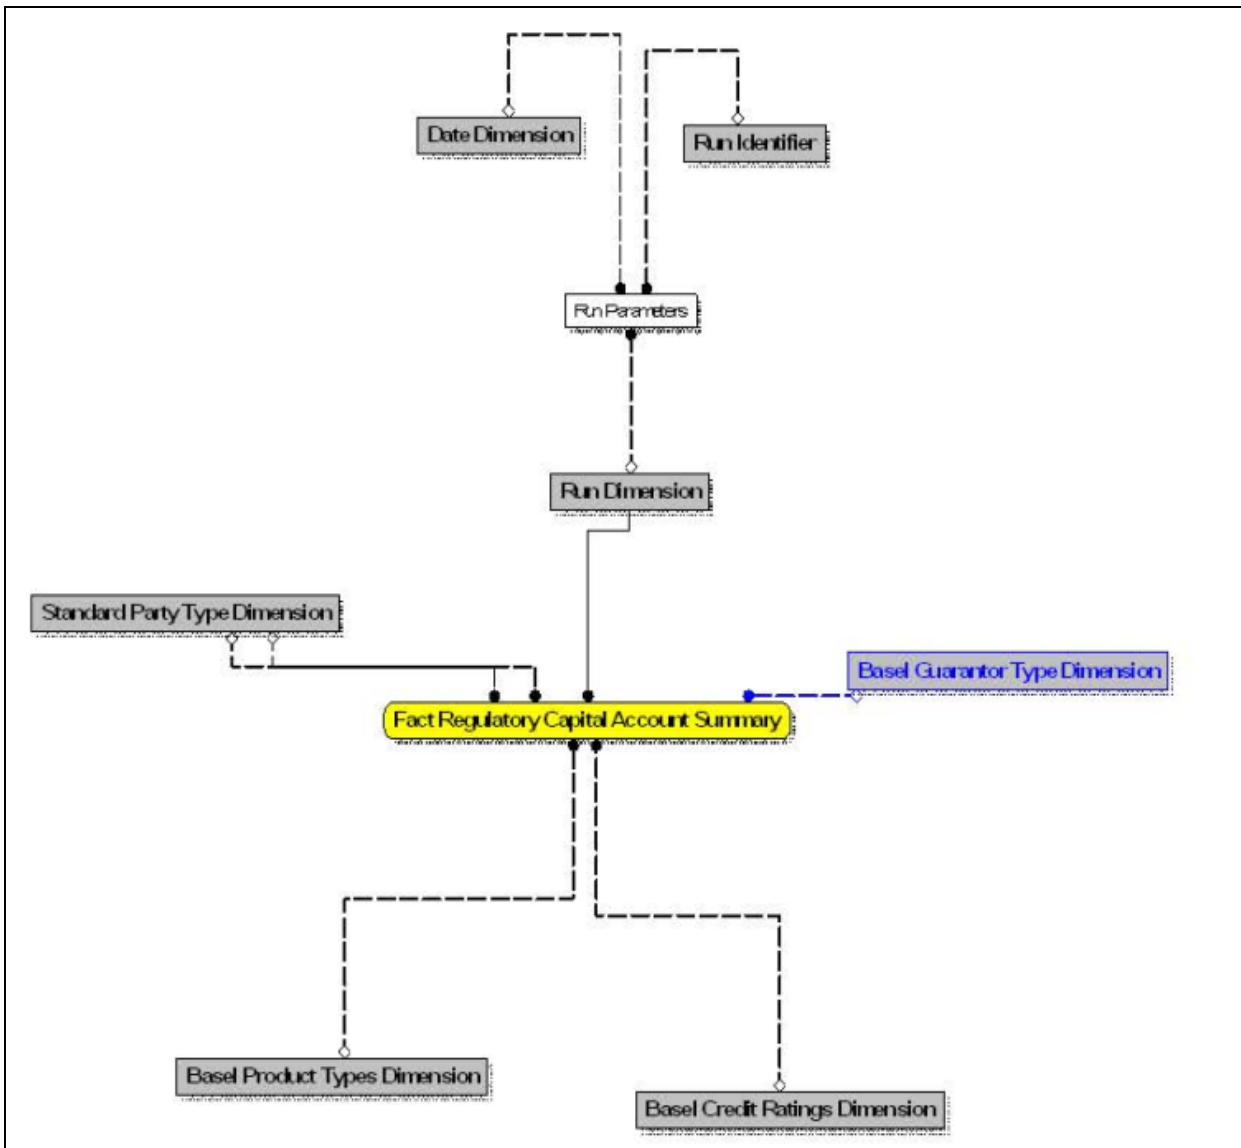


Figure 17. Fact Reg Cap Account Summary

- Fact Sales Representative Compensation

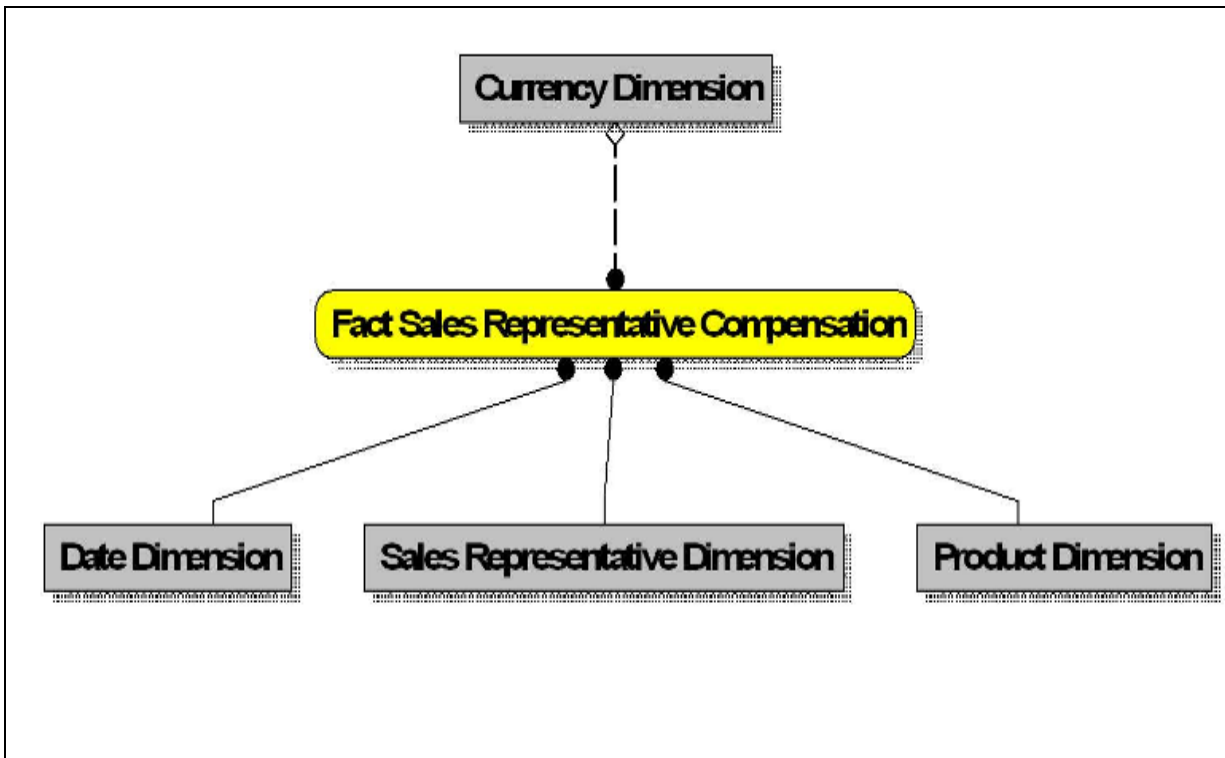


Figure 18. Fact Sales Representative Compensation

- Fact Transaction Summary

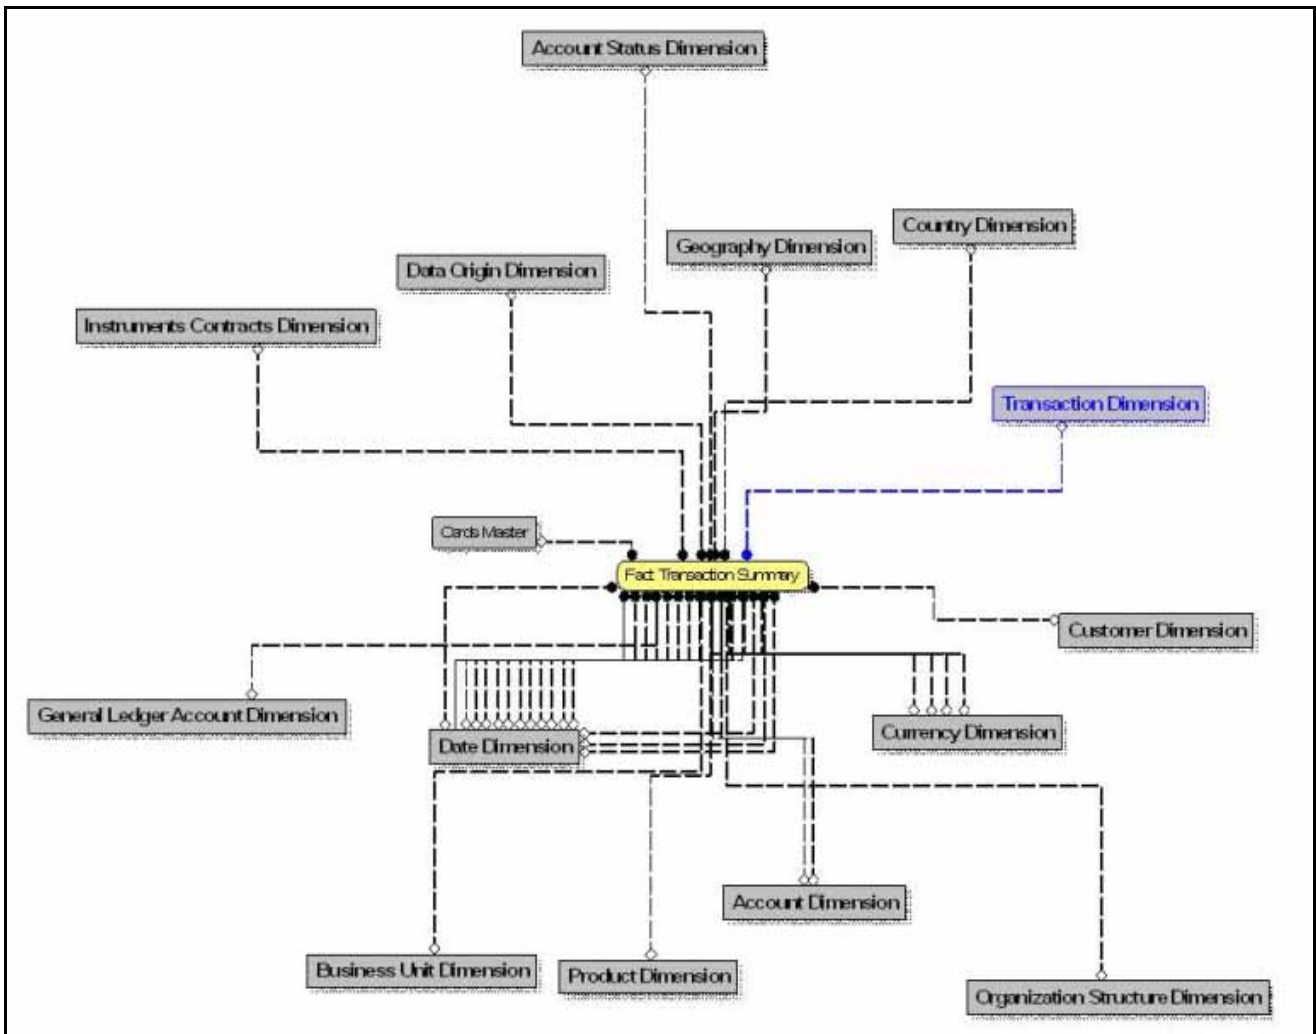


Figure 19. Fact Transaction Summary

- FTP Account Summary

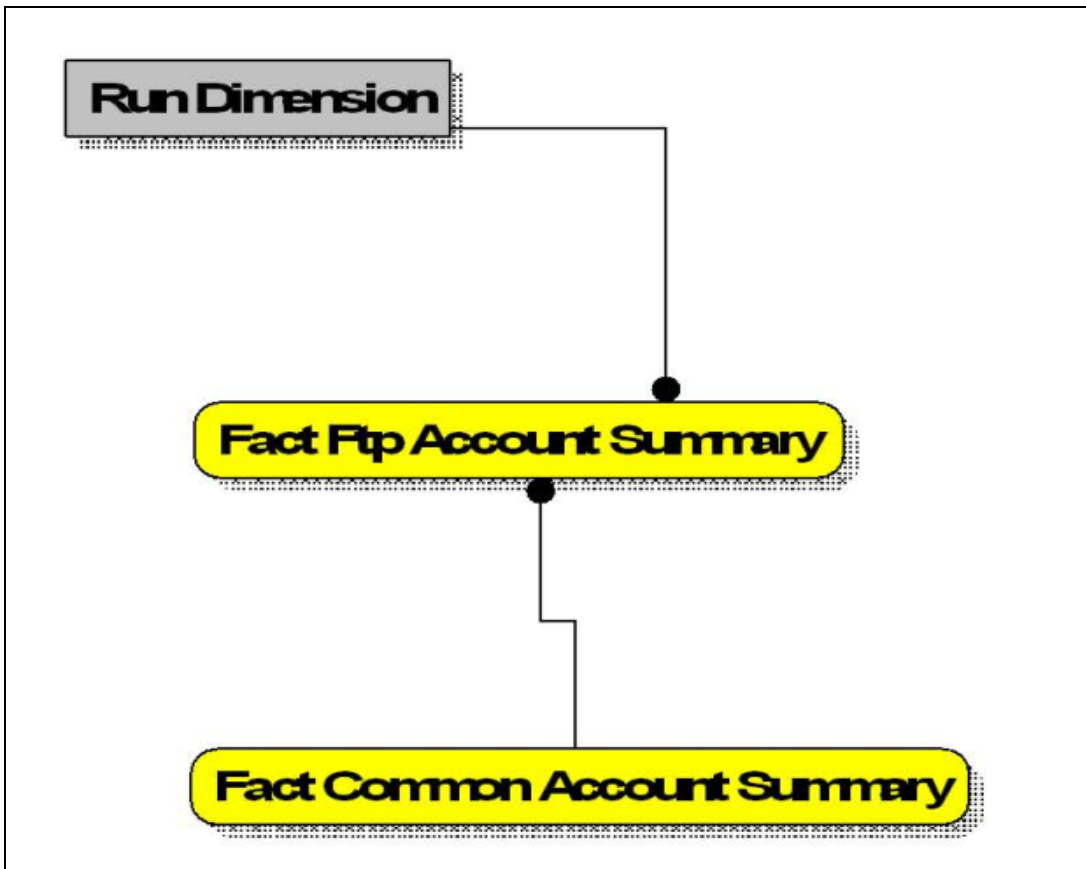


Figure 20. FTP Account Summary

- PFT Account Summary

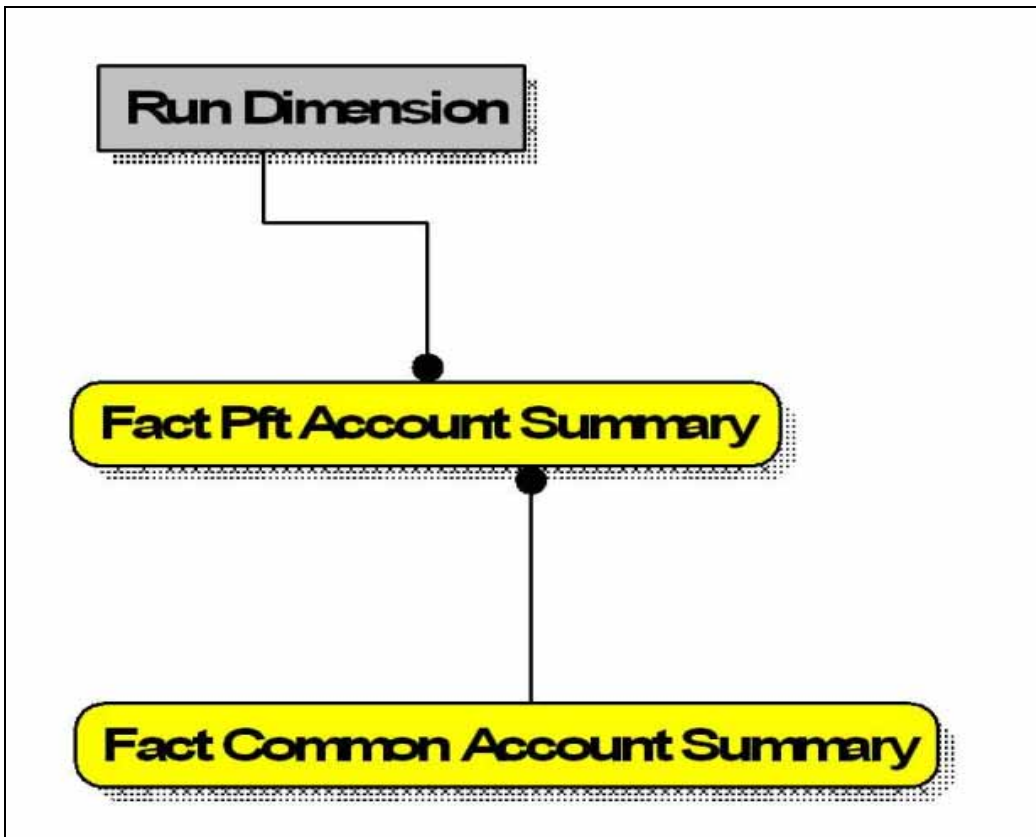


Figure 21. PFT Account Summary

- PFT Customer Summary

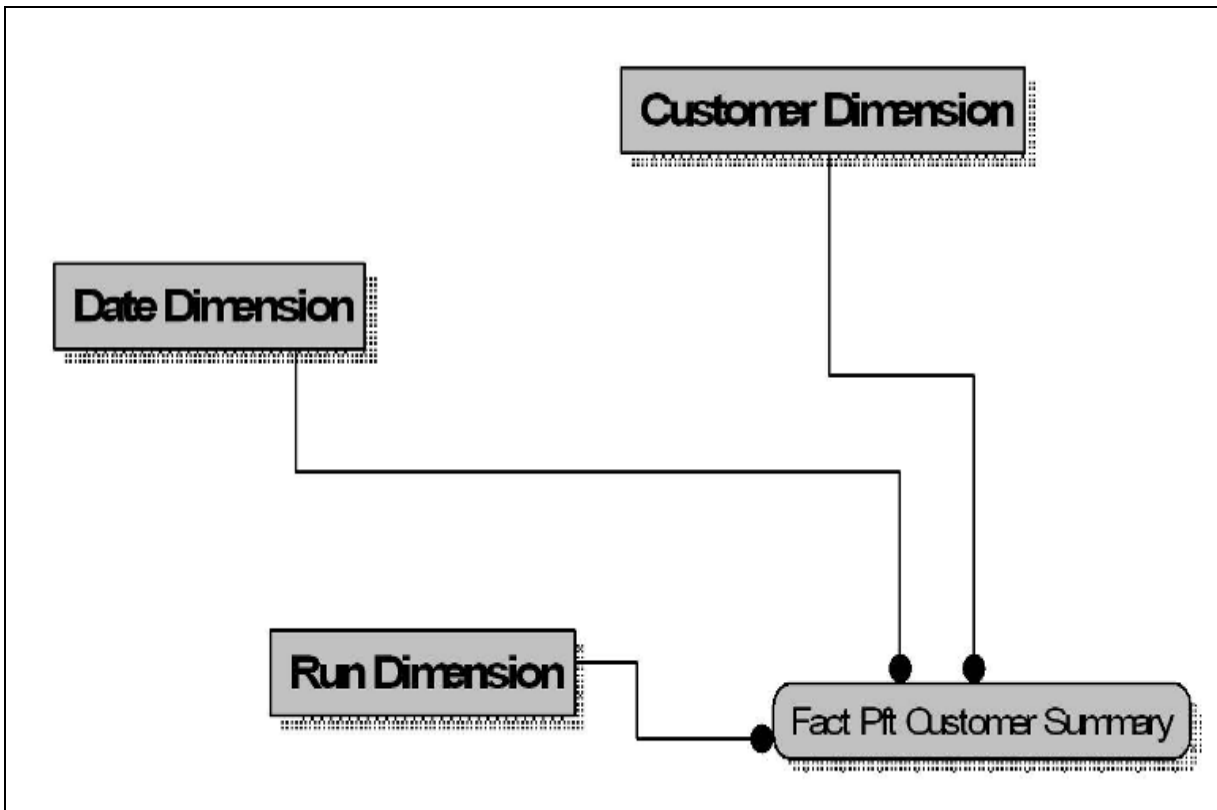


Figure 22. PFT Customer Summary

Data Flow: OFSIPA BI Data Model to Essbase Cubes

Reports of OFSIPA application can be configured to work on Relational database or Hyperion Essbase Multi-dimensional databases, that is cubes. Multi-dimensional databases store aggregated data for better performance and provide mechanisms for performing non-additive rollup within a hierarchy and defining complex derived measures using cross-dimensional operations. OFSAA Infrastructure is used for defining metadata about the cube and for building the Essbase cubes. Essbase cubes can be built out of reporting fact entities to improve performance.

OFSIPA application has the following seeded cube metadata:

Table 4. Seeded Cube Metadata

Cube Code	Cube Name	Fact Entities in dataset
ADCRM001	Institutional Analysis	Fact Common Account Summary Fact CRM Account Summary Fact Common Customer Summary Fact CRM Customer Summary Fact FTP Account Summary Fact PFT Account Summary
Adiparm2	RM L and P	DIM_MANAGEMENT DIM_RUN DIM_LOB DIM_PRODUCT DIM_ORG_UNIT DIM_DATES DIM_REP_LINE WTHREPMV USRMGRMV

This chapter discussed the following topics:

- [Dimension Tables Population](#)
- [Overview of SCD Process](#)
- [Tables Used by the SCD Component](#)

Dimension Tables Population

OFSIPA solution use the SCD component to handle dimensional data changes.

Overview of SCD Process

SCDs are dimensions that have data that changes slowly, rather than changing on a time-based, regular schedule.

For more information on SCDs, see

- *Oracle Data Integrator Best Practices for a Data Warehouse* at <http://www.oracle.com/technetwork/middleware/data-integrator/overview/odi-best-practices-datawarehouse-whi-129686.pdf>
- *Oracle® Warehouse Builder Data Modeling, ETL, and Data Quality Guide* at http://docs.oracle.com/cd/E14072_01/owb.112/e10935.pdf

Additional online sources include:

- http://en.wikipedia.org/wiki/Slowly_changing_dimension
- http://www.oracle.com/webfolder/technetwork/tutorials/obe/db/10g/r2/owb/owb10gr2_gs/owb/lesson3/slowlychangingdimensions.htm
- <http://www.oraclebidwh.com/2008/11/slowly-changing-dimension-scd/>
- <http://www.informationweek.com/news/software/bi/showArticle.jhtml?articleID=204800027&pgno=1>
- <http://www.informationweek.com/news/software/bi/showArticle.jhtml?articleID=59301280>

An excellent published resource that covers SCD in detail is *"The Data Warehouse Toolkit: The Complete Guide to Dimensional Modeling"* by Ralph Kimball and Margy Ross.

The SCD component of the platform is delivered via a C++ executable. The types of SCD handled by the OFSAAI SCD component for OFSPA solution are Type 1 and Type 2.

Prerequisites

1. The SCD executable should be present under <installation home>ficdb/bin. The file name is **scd**.

2. The user executing the SCD component should have execute rights on the file mentioned as prerequisite in point 2.
3. The setup tables accessed by SCD component are SYS_TBL_MASTER and SYS_STG_JOIN_MASTER. SYS_TBL_MASTER stores the information like which is the source stage table and the target dimension tables. The source sometimes can be the database views which could be simple or a complex view. SYS_STG_JOIN_MASTER stores the information like which source column is mapped to which column of a target dimension table. It makes use of data base sequence to populate into surrogate key columns of dimension tables.

Tables Used by the SCD Component

The database tables used by the SCD component are:

- SYS_TBL_MASTER

The solution installer will populate one row per dimension for the seeded dimensions in this table..

Table 5. SYS_TBL_MASTER Dimensions

Column Name	Data Type	Column Description
MAP_REF_NUM	NUMBER(3) NOT NULL	The Mapping Reference Number for this unique mapping of a Source to a Dimension Table.
TBL_NM	VARCHAR2(30) NOT NULL	Dimension Table Name
STG_TBL_NM	VARCHAR2(30) NOT NULL	Staging Table Name
SRC_PRTY	NUMBER(2) NULL	Priority of the Source when multiple sources are mapped to the same target.
SRC_PROC_SEQ	NUMBER(2) NOT NULL	The sequence in which the various sources for the DIMENSION will be taken up for processing.
SRC_TYP	VARCHAR2(30) NULL	The type of the Source for a Dimension, that is, Transaction Or Master Source.
DT_OFFSET	NUMBER(2) NULL	The offset for calculating the Start Date based on the Functional Requirements Document (FRD).
SRC_KEY	NUMBER(3) NULL	

Sample Data: This is the row put in by the solution installer for the Line of Business dimension.

MAP_REF_NUM	6
TBL_NM	DIM_LOB

STG_TBL_NM	STG_LOB_MASTER
SRC_PRTY	
SRC_PROC_SEQ	23
SRC_TYP	MASTER
DT_OFFSET	0
SRC_KEY	

Note: For any new dimension added, a row will have to be inserted to this table manually.

- **SYS_STG_JOIN_MASTER**

The solution installer will populate this table for the seeded dimensions..

Table 6. SYS_STG_JOIN_MASTER Dimensions

Column Name	Data Type	Column Description
MAP_REF_NUM	NUMBER(3) NOT NULL	The Mapping Reference Number for this unique mapping of a Source to a Dimension Table.
COL_NM	VARCHAR2(30) NOT NULL	Name of the column in the Dimension Table.
COL_TYP	VARCHAR2(30) NOT NULL	Type of column. The possible values are given in the following section.
STG_COL_NM	VARCHAR2(60) NULL	Name of the column in the Staging Table.
SCD_TYP_ID	NUMBER(3) NULL	SCD type for the column.
PRTY_LOOKUP_REQD_FLG	CHAR(1) NULL	Column to determine whether Lookup is required for Priority of Source against the Source Key Column or not.
COL_DATATYPE	VARCHAR2(15) NULL	The list of possible values are VARCHAR, DATE, NUMBER based on the underlying column datatype.
COL_FORMAT	VARCHAR2(15) NULL	

The possible values for column type (the COL_TYPE column) in SYS_STG_JOIN_MASTER are:

- PK – Primary Dimension Value (may be multiple for a given "Mapping Reference Number")
- SK – Surrogate Key
- DA – Dimensional Attribute (may be multiple for a given "Mapping Reference Number")
- SD – Start Date
- ED – End Date
- LRI – Latest Record Indicator (Current Flag)

5. Click **New Task** ('+' symbol in Task Details container).
6. Enter the Task ID and Description.
7. Select **Run Executable**, from the Component ID list.
8. Click **Parameters**. Select the following from the Dynamic Parameters List and then click **Save**:
 - Datastore Type - Select the appropriate datastore from the list
 - Datastore Name - Select the appropriate name from the list
 - IP address - Select the IP address from the list
 - Executable - scd,<map ref num>

Example

scd, 61 (Refer the following sections for details)

- Wait: When the file is being executed you have the choice to either wait till the execution is complete or proceed with the next task. Click the list box of the field provided for Wait in the Value field to select 'Yes' or 'No'. Clicking **Yes** that you wish to wait for the execution to be complete. Clicking **No** indicates that you wish to proceed.
- Batch Parameter: Clicking **Yes** would mean that the batch parameters are also passed to the executable being started; else the batch parameters will not be passed to the executable.

Important: Always select **Y** in Batch Parameter.

For the Parameter Executable earlier mentioned, the map ref num values are

- -1 (if you want to process all the dimensions). The *Executable* parameter mentioned earlier would be scd,-1
- If you want to process for a single dimension, query the database table SYS_TBL_MASTER and give the number in the map_ref_num column for the dimension you want to process. These are the ones which come seeded with the install.
- Execute the batch from Batch Execution by choosing the batch created following the steps mentioned in the preceding sections for a date.

Note: A seeded batch <Infodom>_SCD_Institutional_Perf_Dim is provided which has all the required dimensions as different tasks that are part of SCD.

Checking the Execution Status

The status of execution can be monitored using the Batch Monitor screen. You can access this from the Left Hand Side (LHS) menu as follows:

From the **Home** menu, select **Operations**, then select **Batch Monitor**.

Note: For a more comprehensive coverage, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

The status messages in Batch Monitor are :

N - Not Started

O - On Going

F - Failure

S – Success

The ICC execution log can be accessed on the application server in the following directory:

`$FIC_DB_HOME/log/ficgen.`

The file name will have the batch execution id.

Sample

`/dbfiles/home/oracle/OFSAAI/ficdb/log/ficgen`

The detailed SCD component log can be accessed on the application server in the directory `$FIC_HOME`, go one folder up from there and then accessing the following path `/ftpshare/<infodom name>/logs`

The file name will have the batch execution id.

Sample

`/dbfiles/home/oracle/ftpshare/OFSAADEMO/logs`

Check the **.profile** file in the installation home if you are not able to find the paths mentioned earlier.

Business data commonly represents information as of a point in time (for example, a balance as of a point in time) or as of a particular span of time (for example, income for the month of March). Time dimension makes it possible to report the balances by Year, Quarter or Month using the rollup functionality of cubes. Cubes makes it possible to rollup the monthly balances to a quarter and then to a year level. For example, the monthly data for January, February and March gets rolled up to Quarter 1 and the Quarter 1, 2, 3 and 4 data get rolled up to, say Year 2011. The rollup of a particular balance depending on their nature could be a simple additive rollup wherein the child member balances are added up to arrive at the parent node balance (for example, Ending Balance) or non additive rollups wherein a node formula is used to specify how to rollup the child member balances (for example, 3 month rolling average).

Point in time reporting is supported for all the reports. The report is represented as of the data selected in the dashboard time prompts. By default, reports is always displayed for the latest available data.

This chapter discusses the following topics:

- [Overview of Time Dimension Population](#)
- [Tables used by the Time Dimension Population Transformation](#)

Overview of Time Dimension Population

Time dimension population transformation is used to populate the DIM_DATES table with values between two dates specified by the user as a batch parameter.

The database components, used by the transformations are:

1. Database function FN_DIM_DATES
2. Database procedure PROC_DIM_DATES_POPULATION, that is called by the database function FN_DIM_DATES.

Prerequisites

1. All the post install steps mentioned in the *Oracle Financial Services Analytical Applications Infrastructure (OFSAAI) Installation and Configuration guide* and the solution installation manual of *Oracle Financial Services Institutional Performance Analytics* have to be completed successfully.
2. Application User must be mapped to a role that has seeded batch execution function (BATPRO).
3. Before executing a batch check if the following services are running on the application server (For more information on how to check if the services are up and on and how to start the services if you find them not running, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*).
 - Iccserver
 - Router
 - AM Server

- Messageserver
4. Batches will have to be created for executing the function. For more details see, **Executing the Time dimension population transformation, page 4-2.**

Tables used by the Time Dimension Population Transformation

DIM_DATES - This table stores the date details to be used for building the cubes.

For more details on viewing the structure of this table, refer to *Oracle Financial Services Analytical Applications Data Model Data Dictionary* or the *Erwin Data Model*.

Executing the Time Dimension Population Transformation

To execute the function from OFSAAI Information Command Center (ICC) frame work, create a batch by performing the following steps:

Note: For a more comprehensive coverage of configuration and execution of a batch, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

1. From the **Home** menu, select **Operations**, then select **Batch Maintenance**.
2. Click **New Batch** ('+' symbol in Batch Name container) and enter the Batch Name and description.
3. Click **Save**.
4. Select the Batch you have created in the earlier step by clicking on the checkbox in the Batch Name container.
5. Click **New Task** ('+' symbol in Task Details container).
6. Enter the Task ID and Description.
7. Select **Transform Data**, from the components list.
8. Select the following from the Dynamic Parameters List and then click **Save**:
 - Datastore Type - Select appropriate datastore from the list
 - Datastore Name - Select appropriate name from the list
 - IP address - Select the IP address from the list
 - Rule Name - Select **Dim_Dates_Population** from the list of all available transformations. (This is a seeded Data Transformation which is installed as part of the OFSIPA solution installer. If you don't see this in the list, contact Oracle support)
 - Parameter List – Start Date, End Date (Refer the following for details on Parameter list)

Explanation for the parameter list is:

- Start Date – This is the date starting from which the Transformation will populate Dim_Dates table. Date should be specified in the format 'YYYYMMDD'.
- End Date - This is the date up to which the Transformation will populate Dim_Dates table. Date should be specified in the format 'YYYYMMDD'. Sample parameter for this task is '20081131', '20091231'.

9. You can execute the batch in two ways:

- Execute the batch from Batch Execution by choosing the batch created following the steps mentioned in the preceding sections for a date.

Note: A seeded batch <INFODOM>_aCRM_CommonTasks - Task2 is provided so that the user can just modify the parameters and execute the batch.

- The function can also be executed directly on the database through SQLPLUS.

Details are:

Function Name: FN_DIM_DATES

Parameters: P_BATCH_RUN_ID, P_AS_OF_DATE, P_ST_DT, and P_ED_DT

Sample parameter values: 'Batch1', '20091231', '20081131', and '20091231'

Checking the Execution Status

The status of execution can be monitored using the batch monitor screen.

Note: For a more comprehensive coverage of configuration and execution of a batch, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

The status messages in batch monitor are :

- N - Not Started
- O - On Going
- F - Failure
- S – Success

The Event Log window in Batch Monitor provides logs for execution with the top row being the most recent. If there is any error during execution, it will get listed here. Even if you see Successful as the status in Batch Monitor it is advisable to go through the Log and re-check if there are any errors. The execution log can be accessed on the application server by going to the following directory `$FIC_DB_HOME/log/date`. The file name will have the batch execution id. The database level operations log can be accessed by querying the `FSI_MESSAGE_LOG` table. The batch run id column can be filtered for identifying the relevant log.

Check the **.profile** file in the installation home if you are not able to find the paths mentioned earlier.

This chapter discusses the following topics:

- [Overview](#)
- [Populating Party Dimension](#)
- [FSI_MERGE_SETUP_DETAILS](#)
- [FSI_MERGE_SETUP_MASTER](#)

Overview

In the current setup, Customer Dimension is populated as part of Party Model, where DIM_CUSTOMER derives its attributes from DIM_PARTY based on the Parties that have been assigned the role of a Customer.

Populating Party Dimension

DIM_PARTY table will be populated first from stage table STG_PARTY_MASTER using SCD. Function FN_PARTY_DENORMALIZE_DT will populate DIM_CUSTOMER from DIM_PARTY. The function is used to populate DIM_CUSTOMER table using a sequence.

The primary key for DIM_PARTY – N_PARTY_SKEY will be the surrogate key generated for the natural key - Party ID, an alphanumeric unique identifier within each staging instrument tables. This information is stored in DIM_CUSTOMER table as N_CUST_SKEY.

FSI_MERGE_SETUP_DETAILS

Customer dimension population makes use of setup table FSI_MERGE_SETUP_DETAILS. It would have seeded entries from the application installation. This table stores the mapping between source and target columns.

Table 7. Columns in FSI_MERGE_SETUP_DETAILS

Column Name	Data Type	Column Description
MERGE_CODE	VARCHAR2 (50 CHAR)	This is the role of the party, that is, customer, issuer, and so on.
SOURCE_TABLE	VARCHAR2 (30 CHAR)	This is the source table for Customer dimension population.
SOURCE_COLUMN	VARCHAR2 (30 CHAR)	This is the source column for Customer dimension population.
TARGET_COLUMN	VARCHAR2 (30 CHAR)	This is the target column for Customer dimension population.

Table 7. Columns in FSI_MERGE_SETUP_DETAILS

DEFAULT_VALUE	VARCHAR2 (4000 CHAR)	This is the default value for some target columns.
NVL_EXPRESSION	VARCHAR2 (30 CHAR)	This is the nvl expression applied on the source column for Customer dimension population.
AGGREGATE_FUNCTION	VARCHAR2 (30 CHAR)	This is used for aggregating data for some source columns.

Here is a sample data:

MERGE_CODE	MI		
TABLE SOURCE	DIM_PARTY		
SOURCE_COLUMN	V_PARTY_ID	V_MIDDLE_NAME	V_LAST_NAME
TARGET_COLUMN	V_ISSUER_CODE	V_D_CUST_MIDDLE _NAME	V_D_CUST_LAST_N AME
DEFAULT_VALUE			
NVL_EXPRESSION			
AGGREGATE_FUNCTION			

FSI_MERGE_SETUP_MASTER

Customer dimension population makes use of setup table FSI_MERGE_SETUP_MASTER as well. It would have seeded entries from the application installation. This table stores the mapping between source and target tables.

Table 8. Columns in FSI_MERGE_SETUP_MASTER

Column Name	Data Type	Column Description
MERGE_CODE	VARCHAR2 (50 CHAR)	This is the role of the party, that is, customer, issuer, and so on.
SOURCE_TABLES	VARCHAR2 (4000 CHAR)	This is the list of source tables for Customer dimension population.
TARGET_TABLE	VARCHAR2 (30 CHAR)	This is the target column for Customer dimension population.
ANSI_JOIN	VARCHAR2 (4000 CHAR)	This is the join condition that results in dataset.
FILTER_CONDITION	VARCHAR2 (4000 CHAR)	This is used for filtering the values in where clause.

Here is a sample data:

MERGE_CODE	MI
SOURCE TABLES	DIM_PARTY
TARGET_TABLE	V_PARTY_ID
ANSI JOIN	V_ISSUER_CODE
FILTER CONDITION	

Executing the Customer Dimension Population

To execute the customer dimension population, create a batch by performing the following steps:

1. From the **Home** menu, select **Operations**, then select **Batch Maintenance**.
2. Click **New Batch** ('+' symbol in Batch Name container) and enter the Batch Name and description.
3. Click **Save**.
4. Select the Batch you have created in the earlier step by clicking on the check box in the Batch Name container.
5. Click **New Task** ('+' symbol in Task Details container).
6. Enter the Task ID and Description.
7. Select **Transform Data** from the components list.
8. Select the following from the Dynamic Parameters List and then click **Save**:
 - Datastore Type - Select appropriate datastore from the list
 - Datastore Name - Select appropriate name from the list. Generally, it is the infodomain name.
 - IP address - Select the IP address from the list
 - Rule Name - FN_PARTY_DENORMALIZE_DT
 - Parameter List: Surrogate Key Required Flag – Y or N

Batch run ID and As of Date are passed internally by the ICC to the Data Transformation task.

9. Execute the batch.

Execute the batch from Batch Execution by choosing the batch created following the steps mentioned in the preceding sections for a required date.

Note: A seeded batch <INFODOM> aCRM_CommonTasks – Task3 is provided so that the user can just modify the parameters and execute the batch.

Checking the Execution Status

The status of execution can be monitored from the *Batch Monitor* screen of OFSAAI Operations module.

Note: For a more comprehensive coverage of configuration & execution of a batch, refer to *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

The status messages in Batch Monitor are:

- N - Not Started
- O - On Going
- F - Failure
- S - Success

The Event Log window in Batch Monitor provides logs for execution with the top row being the most recent. If there is any error during execution, it will get listed here. Even if you see *Successful* as the status in Batch Monitor it is advisable to go through the Event Log and re-check if there are any errors. The execution log can be accessed on the application server by going to the directory `$FIC_DB_HOME/log/date`. The file name will have the Batch Execution ID.

The database level operations log can be accessed by querying the `FSI_MESSAGE_LOG` table. The batch run id column can be filtered for identifying the relevant log.

Check the **.profile** file in the installation home if you are not able to find the paths mentioned above.

This chapter discusses the following topics:

- [Dimension Tables Population](#)
- [Overview of SCD process](#)
- [Tables Used by the SCD Component](#)

Dimension Tables Population

Data Foundation solutions use the SCD component to handle dimensional data changes.

Overview of SCD process

A Slowly Changing Dimension (SCD) is a dimension that stores and manages both current and historical data over time in a data warehouse. SCDs are dimensions that have data that changes slowly, rather than changing on a time-based, regular schedule. It is considered and implemented as one of the most critical ETL tasks in tracking the history of dimension records. There are three types of SCDs and you can use Warehouse Builder to define, deploy, and load all three types of SCDs.

- Type 1 SCDs - Overwriting

The Type 1 methodology overwrites old data with new data, and therefore does not track historical data. This is useful for making changes to dimension data.

Table 9. Example: Type 1 SCDs - Overwriting

N_PRODUCT_ SKEY	V_PRODUCT_ NAME	D_START_DATE	D_END_DATE	F_LATEST_RECORD_IN DICATOR
1	PL	5/31/2010	12/31/9999	N

In this example, N_PRODUCT_SKEY is the surrogate key column which is a unique key for each record in the dimension table. V_PRODUCT_NAME is the product name. D_START_DATE indicates the date from which this product record is valid. D_END_DATE indicates the date till which this product record is valid.

F_LATEST_RECORD_INDICATOR with value 'Y', which indicates this is the latest record in the dimension table for this product and 'N' indicates it is not. If the V_PRODUCT_NAME column is set as a Type 1 SCD column and if there is a change in the product name to 'Personal Loan' from 'PL' in the above example, in the next processing period, then when SCD is executed for the new processing period the record in the above example changes to:

Table 10. Example 2: Type 1 SCDs - Overwriting

N_PRODUCT_SKEY	V_PRODUCT_NAME	D_START_DATE	D_END_DATE	F_LATEST_RECORD_INDICATOR
1	Personal Loan	6/30/2010	12/31/9999	Y

- Type 2 SCDs - Creating another dimension record

The Type 2 method tracks historical data by creating multiple records for a given natural key in the dimensional tables with separate surrogate keys. With Type 2, the historical changes in dimensional data are preserved. In the above example for the change in product name from 'PL' to 'Personal Loan' if history has to be preserved, then the V_PRODUCT_NAME column has to be set as Type 2 when SCD is processed for the processing period and the change inserts a new record as shown in the following example:

Table 11. Example: Type 2 SCDs - Creating another dimension record

N_PRODUCT_SKEY	V_PRODUCT_NAME	D_START_DATE	D_END_DATE	F_LATEST_RECORD_INDICATOR
1	PL	6/30/2010	12/31/9999	N
1	Personal Loan	6/30/2010	12/31/9999	Y

A new record is inserted to the product dimension table with the new product name. The latest record indicator for this is set as 'Y', indicating that this is the latest record for the personal loan product. The same flag for the earlier record was set to 'N'.

- Type 3 SCDs - Creating a current value field

A Type 3 SCD stores two versions of values for certain selected level attributes. Each record stores the previous value and the current value of the selected attribute.

When the value of any of the selected attributes changes, the current value is stored as the old value and the new value becomes the current value.

For more information on SCDs, see

Oracle Data Integrator Best Practices for a Data Warehouse at

Oracle Data Integrator Best Practices for a Data Warehouse at

<http://www.oracle.com/technetwork/middleware/data-integrator/overview/odi-best-practices-datawarehouse-whi-129686.pdf>

Oracle® Warehouse Builder Data Modeling, ETL, and Data Quality Guide at

http://docs.oracle.com/cd/E11882_01/owb.112/e10935.pdf

[http://docs.oracle.com/cd/E14072_01/owb.112/e10935.pdf]

Additional online sources include:

http://en.wikipedia.org/wiki/Slowly_changing_dimension

http://www.oracle.com/webfolder/technetwork/tutorials/obe/db/10g/r2/owb/ogr2_gs/owb/lesson3/slowlychangingdimensions.htm

<http://www.oraclebidwh.com/2008/11/slowly-changing-dimension-scd/>

<http://www.informationweek.com/news/software/bi/showArticle.jhtml?articleID=204800027> and page no=1

<http://www.informationweek.com/news/software/bi/showArticle.jhtml?articleID=59301280>

An excellent published resource that covers SCD in detail is *"The Data Warehouse Toolkit: The Complete Guide to Dimensional Modeling"* by Ralph Kimball and Margy Ross.

Prerequisites

Following are the prerequisites:

1. The SCD executable should be present under <installation home>ficdb/bin. The file name is scd.
2. The user executing the SCD component should have execute rights on the file mentioned as prerequisite in point 2.
3. The setup tables accessed by SCD component are SYS_TBL_MASTER and SYS_STG_JOIN_MASTER. SYS_TBL_MASTER stores the information like which is the source stage table and the target dimension tables. The source sometimes can be the database views which could be simple or a complex view. SYS_STG_JOIN_MASTER stores the information like which source column is mapped to which column of a target dimension table. It makes use of database sequence to populate into surrogate key columns of dimension tables.

Tables Used by the SCD Component

The database tables used by the SCD component are:

- SYS_TBL_MASTER

The solution installer will populate one row per dimension for the seeded dimensions in this table.

Table 12. SYS_TBL_MASTER dimensions

Table Name	Column Name	Expected Values
DIM_CUSTOMER_TYPE	V_CUST_CATEGORY	C
FCT_CRM_ACCOUNT_SUMMARY	V_SCENARIO_CODE	PLAN, BUDGET
FCT_OPPORTUNITY_ACTIVITY	V_ACTIVITY_STATUS	O, C
DIM_BANDS	V_BAND_TYPE	AGEONBOOK
		TURNOVER

Table 12. SYS_TBL_MASTER dimensions

FCT_ACCOUNT_PROFITABILITY	N_REP_LINE_CD	98000 - Net Income Before Taxes
		98500 - Tax Expense
		99000 - Net Income After Taxes
		107100 - Number of Customers
		107130 - Number of Open Customers
		107200 - Number of Accounts
		107230 - Number of Open Accounts
		107300 - Attrition Rate

Sample Data: This is the row put in by the solution installer for the Line of Business dimension.

Note: For any new dimension added, a row will have to be inserted to this table manually.

- SYS_STG_JOIN_MASTER

The solution installer will populate this table for the seeded dimensions.

Table 13. SYS_STG_JOIN_MASTER dimensions

Table Name	Column Name	Expected Values
DIM_CUSTOMER_TYPE	V_CUST_CATEGORY	C
FCT_CRM_ACCOUNT_SUMMARY	V_SCENARIO_CODE	PLAN, BUDGET
FCT_OPPORTUNITY_ACTIVITY	V_ACTIVITY_STATUS	O, C
DIM_BANDS	V_BAND_TYPE	AGEONBOOK
		TURNOVER
FCT_ACCOUNT_PROFITABILITY	N_REP_LINE_CD	98000 - Net Income Before Taxes
		98500 - Tax Expense
		99000 - Net Income After Taxes
		107100 - Number of Customers
		107130 - Number of Open Customers
		107200 - Number of Accounts
		107230 - Number of Open Accounts
		107300 - Attrition Rate

The possible values for column type (the COL_TYPE column) in SYS_STG_JOIN_MASTER are:

- PK – Primary Dimension Value (may be multiple for a given "Mapping ReferenceNumber")
- SK – Surrogate Key
- DA – Dimensional Attribute (may be multiple for a given "Mapping Reference Number")
- SD – Start Date
- ED – End Date

Executing the SCD Component

To execute the SCD component from Operations module of OFSAAI, create a batch according to the following steps:

Note: For a more comprehensive coverage of configuration and execution of a batch, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

1. From the **Home** menu, select **Operations**, then select **Batch Maintenance**.
2. Click **New Batch** ('+' symbol in Batch Name container) and enter the Batch Name and Description.
3. Click **Save**.
4. Select the Batch you created in the earlier step by clicking the check box in the Batch Name container.
5. Click **New Task** ('+' symbol in Task Details container).
6. Enter the Task ID and Description.
7. Select **Run Executable** from the Component ID list.
8. Click **Parameters**. Select the following from the Dynamic Parameters List and then click **Save**:
 - Datastore Type - Select the appropriate datastore from the list
 - Datastore Name - Select the appropriate name from the list
 - IP address - Select the IP address from the list
 - Executable - scd, <map ref num>

Example

Example

scd, 61 (Refer the following sections for details)

- Wait: When the file is being executed you have the choice to either wait till the execution is complete or proceed with the next task. Click the list box of the field provided for **Wait in the Value** field to select **Yes** or **No**. Clicking **Yes** confirms that you wish to wait for the execution to be complete. Clicking **No** indicates that you wish to proceed.
- Batch Parameter: Clicking **Yes** would mean that the batch parameters are also passed to the executable being started else the batch parameters will not be passed to the executable.

Note: Always select **Y** in Batch Parameter.

For the Parameter Executable earlier mentioned, the map ref num values are

- -1 (if you want to process all the dimensions). The Executable parameter mentioned earlier would be scd,-1
 - If you want to process for a single dimension, query the database table SYS_TBL_MASTER and give the number in the map_ref_num column for the dimension you want to process. These are the ones which come seeded with the install.
9. Execute the batch from Batch Execution by choosing the batch created following the steps mentioned in the preceding sections for a date.

Note: A seeded batch <Infodom>_SCD is provided which has all the required dimensions as different tasks that are part of SCD.

Checking the Execution Status

The status of execution can be monitored using the Batch Monitor screen. You can access this from the Left Hand Side (LHS) menu as follows:

From the **Home** menu, select **Operations**, then select **Batch Monitor**.

Note: For a more comprehensive coverage, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

The status messages in Batch Monitor are:

- N - Not Started
- O - On Going
- F - Failure
- S - Success

The ICC execution log can be accessed on the application server in the following directory:

`$FIC_DB_HOME/log/ficgen.`

The file name will have the batch execution id.

Sample

`/dbfiles/home/oracle/OFSAAI/ficdb/log/ficgen`

The detailed SCD component log can be accessed on the application server in the directory `$FIC_HOME`, go one folder up from there and then accessing the following path: `/ftpshare/<infodom name>/logs`

The file name will have the batch execution id.

Sample

`/dbfiles/home/oracle/ftpshare/OFSAADemo/logs`

Check the **.profile** file in the installation home if you are not able to find the paths mentioned earlier.

Load DIM_ACCOUNT through SCD

The SCD population in DIM_ACCOUNT table generates individual numeric SKEYs for every account number with an additional leg key. Following are the columns that will be loaded during SCD population:

- V_ACCOUNT_NUMBER
- N_ACCT_SKEY
- N_RCV_LEG_ACCT_SKEY
- FIC_MIS_DATE

This approach replaces the function load in which the table DIM_ACCOUNT is getting loaded through the function, `FN_POPDIMACCOUNT`. This loads the following columns into DIM_ACCOUNT table:

- V_ACCOUNT_NUMBER
- N_ACCT_SKEY
- N_RCV_LEG_ACCT_SKEY
- FIC_MIS_DATE

Where, the sources are the different product processor tables present in the solution, which are configured in FSI_DIM_ACCOUNT_SETUP_DETAILS table.

DIM_ACCOUNT_SCD

Batch <INFODOM>DIM_ACCOUNT_SCD has been introduced with 33 tasks under it. These 33 tasks represent the 33 SCD processes where different product processors would be the source and DIM_ACCOUNT would be the target. MAP_REF_NUMs 188 to 217 have been introduced into SYS_TBL_MASTER table, and subsequently into SYS_STG_JOIN_MASTER.

DIM_ACCOUNT_SCD has been introduced with 33 tasks under it. These 33 tasks represent the 33 SCD processes where different product processors would be the source and DIM_ACCOUNT would be the target. MAP_REF_NUMs 188 to 217 have been introduced into SYS_TBL_MASTER table, and subsequently into SYS_STG_JOIN_MASTER.

Depending on the requirement by an application, a task can be excluded or included from the batch execution.

LOAD DIM TABLES THROUGH SCD

Batch <INFODOM>_SCD has been introduced with 129 tasks under it. These 129 tasks represent the 129 SCD processes where different staging tables would be the source and Dimension Tables would be the targets. The required SCDs have been introduced into SYS_TBL_MASTER table, and subsequently into SYS_STG_JOIN_MASTER.

Depending on the requirement by an application, a task can be excluded or included from the batch execution.

Improve SCD Performance

SCD performance can be improved by providing hints and session alter statements. This requires the presence of the following four columns in SYS_TBL_MASTER:

- merge_hint
- select_hint
- session_enable_statement
- session_disable_statement

These columns are present in the OFSAAI versions 7.3.2.4.0 and higher. If these have to be used in OFSAAI versions 7.3.2.2.0 or 7.3.2.3.0 and higher, execute the following SQL queries:

```
ALTER TABLE SYS_TBL_MASTER ADD MERGE_HINT VARCHAR2(255)
/
ALTER TABLE SYS_TBL_MASTER ADD SELECT_HINT VARCHAR2(255)
/
ALTER TABLE SYS_TBL_MASTER ADD SESSION_ENABLE_STATEMENT VARCHAR2(255)
/
ALTER TABLE SYS_TBL_MASTER ADD SESSION_DISABLE_STATEMENT VARCHAR2(255)
/
```

During upgrade to OFSAAI 7.3.2.4.0, ensure to backup SYS_TBL_MASTER table and to drop the preceding four columns, if these scripts are executed in any of the OFSAAI versions prior to 7.3.2.4.0. Otherwise, an upgrade to OFSAAI 7.3.2.4.0 may throw an error, since the columns are existing.

- For improving performance, hints for the MERGE query which is generated internally by the SCD can be provided under MERGE_HINT. Session alters could be mentioned under SESSION_ENABLE_STATEMENT and SESSION_DISABLE_STATEMENT columns.
- SESSION_ENABLE_STATEMENTS will be executed before the MERGE in the SCD and SESSION_DISABLE_STATEMENTS will be executed after the SCD MERGE.
- Since all the tasks under the SCD batch for DIM_ACCOUNT works on the same target, the SESSION_DISABLE_STATEMENTS in SYS_TBL_MASTER cannot be provided when tasks are executed. In this case, there can be a separate SQL file to contain all the SESSION_DISABLE_STATEMENTS to be executed once after all the tasks in the SCD are done. The SESSION_DISABLE_STATEMENT will hold a null in SYS_TBL_MASTER table.
- SESSION_ENABLE_STATEMENTS are required to be mentioned only for the first task in the batch. Here the target is the same for all the tasks under a batch. In case any of the tasks are to be executed separately, then the SESSION_ENABLE_STATEMENTS should be mentioned for any one of the tasks which is included in the batch for the execution.

Table 14. Example: MERGE_HINT and SESSION_ENABLE_STATEMENT in SYS_TBL_MASTER

Table Name	Stage Table Name	Stage Table Name	Session Enable Statement
DIM_ACCOUNT	STG_LOAN_CONTRACTS_V	/*+ parallel (DIM_ACCOUNT,10) */	"alter session enable parallel dml query", "alter table DIM_ACCOUNT nologging parallel 10"

- All the tasks can be executed in parallel. This might cause the N_RCV_LEG_ACCT_SKEY to have an incremental value as compared to N_ACCT_SKEY.
- Execute the SQL file with all the SESSION_DISABLE_STATEMENTS, after the successful completion of the SCD batch.
 - Once the DIM_ACCOUNT table is populated using this approach, you will not be able to use the initial approach (FN_POPDIMACCOUNT) as this will lead to skey conflict.
 - Ensure that you have set the value of the sequence seq_dim_account_scd as max (value of skey in DIM_ACCOUNT) + 1, before moving from old to new approach.
 - The F_LATEST_RECORD_INDICATOR for an existing DIM_ACCOUNT data already loaded by the function should be updated to 'Y' before running the SCD, failing which a new skey might get generated for the same account number.
 - SCD execution occurs based on the GAAP code which is configured in SETUP_MASTER table. This has been introduced to tackle the scenario of multiple GAAP codes. Whether or not there exist multiple GAAP codes, SETUP_MASTER should be manually configured as follows:

Table 15. SETUP_MASTER configuration

V_COMPONENT_CODE	V_COMPONENT_DESC	V_COMPONENT_VALUE
DEFAULT_GAAP	DEFAULT_GAAP	USGAAP

Where V_COMPONENT_VALUE should be manually populated with the required GAAP code.

Handling Multiple GAAP Codes for the Same Account Number for the Same MIS Date in SCD

When multiple GAAP codes exist for the same account number for the same MIS date, configure the SETUP_MASTER table manually as mentioned in the preceding section:

V_COMPONENT_VALUE will hold the GAAP code for which the SCD is to be executed.

If there are different GAAP codes for two distinct account numbers for the same MIS date, then the SCD has to be executed for each GAAP code by changing the V_COMPONENT_VALUE manually in setup_master table. The SETUP_MASTER table should have only one record WHERE V_COMPONENT_DESC = 'DEFAULT_GAAP'.

This chapter discusses the following topics:

- [Introduction](#)
- [Execution of Currency Exchange Rates Population T2T](#)
- [Currency Execution Rates - Batch Execution](#)
- [Exchange Rate History Population](#)

Introduction

Exchange Rate History entity stores the exchange rates between the currencies for an effective date from one or multiple sources.

Exchange Rate History population should be executed before any fact table is populated to ensure exchange rates between currencies are available prior. Exchange Rate History entity is loaded by means of Table to Table Transformation process.

Following is the seeded Table-to-Table definition that loads data into Exchange Rate History:

Table 16. T2T Definition Exchange Rate History

T2T Definition Name	Source Table(s)	Destination Table
T2T_EXCHANGE_RATE_HIST	STG_EXCHANGE_RATE_HIST	FSI_EXCHANGE_RATE_HIST

Execution of Currency Exchange Rates Population T2T

The batch <INFODOM>_POP_EXCHANGE_RATES needs to be executed to populate fsi_exchange_rates as the entries in setup_master are seeded during installation.

Note: FSI_EXCHANGE_RATES table has to be loaded prior loading any of the other Account Summary tables.

- Metadata Browser
- Common Account Summary

Currency Execution Rates - Batch Execution

A seeded batch, <Infodom>_POP_EXCHANGE_RATES has to be executed for the required MIS Date.

Alternatively, following steps will help you create a new batch:

1. From the **Home** menu, click **Operations** and select **Batch Maintenance**.
2. Click **New Batch** ('+' symbol in Batch Name container). Enter the Batch Name and Description.
3. Click **Save**.

4. Click the check box in the Batch Name container to select the Batch, you created in the earlier step.
5. Enter the Task ID and Description.
6. Select Load Data from the Components list.
7. Select the following from the Dynamic Parameters List:
 - Datastore Type - Select the appropriate datastore from the list.
 - Datastore Name - Select the appropriate name from the list.
 - IP address - Select the IP address from the list.
 - Load Mode - Select Table to Table from the list.
 - Source Name - Select the <T2T Source Name> from the list.
 - File Name - Select the T2T name for the source stage channel table you want to process.
8. Click **Save**.

Data file name will be blank for any Table to Table Load mode. Default value refers to currency calculation. If there is any need for currency conversion in T2T transactions, Default value has to be provided.

9. Execute the batch created in the preceding steps.

Exchange Rate History Population

To execute the T2T component from OFSAA Infrastructure ICC framework (accessed through the application Batch Operations screen).

A seeded batch, <INFODOM>_aCRM_CommonTasks - **Task4** has to be executed for the required date.

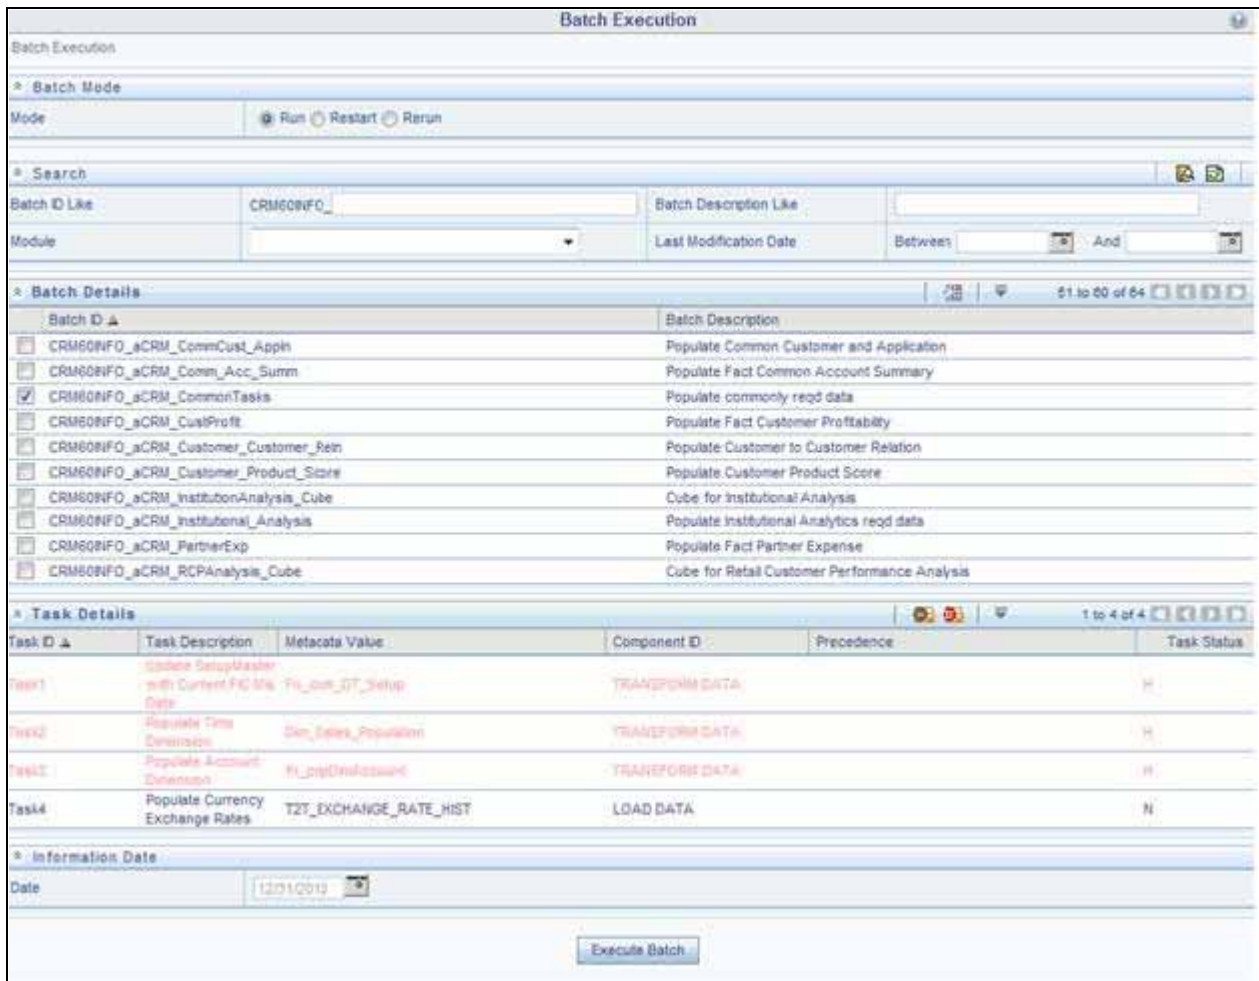


Figure 23. <INFODOM>_aCRM_CommonTasks - Task4

Alternatively, following steps will help to create a new batch task for Loading Historical Exchange Rates:

1. From the **Home** menu, select **Operations**, then select **Batch Maintenance**.
2. Click **New Batch** ('+' symbol in Batch Name container). Enter the Batch Name and Description.
3. Click **Save**.
4. Click the check box in the **Batch Name** container to select the Batch, you created in the earlier step.
5. Enter the **Task ID** and **Description**.
6. Select **Load Data** from the components list.
7. Select the following from the Dynamic Parameters List and then click **Save**.
 - **Datastore Type** - Select appropriate datastore from the list.
 - **Datastore Name** - Select appropriate name from the list.
 - **IP address** - Select the IP address from the list.
 - **Load Mode** - Select Table to Table from the list.

- **Source Name** - Select <T2T Source Name> from the list.
- **File Name** - Select the table to table transformation **T2T_EXCHANGE_RATE_HIST**.

Data file name will be blank for any Table to Table Load mode.

8. Repeat steps 4 to 8 for adding the remaining T2Ts within the same batch definition.
9. Execute the batch created in the preceding steps.

For more information, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

10. Check T2T component logs and batch messages to check the status of load.

T2T component can fail because of following cases:

- Unique constraint error – Target table may already contain the primary keys that are part of the staging tables.
- NOT NULL constraint error – do not have values for NOT NULL columns in the target table.

Checking the Execution Status

The status of execution can be monitored using the batch monitor screen.

The status messages in batch monitor are:

- N - Not Started
- O - On Going
- F - Failure
- S – Success

The execution log can be accessed on the application server in the `$FIC_DB_HOME/log/t2t` directory: The file name will have the batch execution id.

Validating the Exchange Rate

The Function `Fn_ratevalidation` is executed using the task. Edit the "Task1" of the batch "`<INFODOM>_FN_RATEVALIDATION`" and pass the below parameters to the task:

- Starting date
- End date

All the exchange rates present in `FSI_EXCHANGE_RATE_HIST` table whose 'effective date' lies in the range of these values will be validated on execution of this batch. The validated rates will be available in the table `FSI_EXCHNG_RATE_DIRECT_ACCESS`.

Rate Triangulation is also achieved during this process

Account Summary tables are loaded from the staging product processor tables using the Table to Table (T2T) component of Oracle Financial Services Analytical Applications Infrastructure (OFSAAI) framework.

This chapter covers the following topics:

- [Overview of Account Summary Tables](#)
- [Data Flow](#)
- [Overview of Account Summary Population](#)
- [Fact Common Account Summary](#)
- [Fact CRM Account Summary](#)
- [Fact FTP Account Summary](#)
- [Fact PFT Account Summary](#)

Overview of Account Summary Tables

Customer account level data from the Oracle Financial Services Analytical Applications (OFSA) staging product processor tables must be consolidated into a standardized relational Business Intelligence (BI) data model. This consolidation is done to have all the staging product processor table data in a single Fact table.

The Account Summary table data can be used for building cubes which allow rollup of data for a dimension or a combination of dimensions.

This relational BI model consists of three vertically partitioned Account Summary tables that are organized by application subject area.

- **FCT_COMMON_ACCOUNT_SUMMARY** – This table is shared by all OFSAA BI applications which contain dimensional values, attributes, and financial measures which are generally applicable to the individual account records. This data is sourced directly from the staging area.
- **FCT_CRM_ACCOUNT_SUMMARY** – This table has the measures used by all the Customer Insight applications.

Yet, there are few other Account Summary tables which have been designed to store Enterprise Performance Management (EPM) data:

- **FCT_PFT_ACCOUNT_SUMMARY** – This table has Profitability Management (PFT) specific measures.
- **FCT_FTP_ACCOUNT_SUMMARY** – This table has Funds Transfer Pricing (FTP) specific measures.
- **FCT_REG_CAP_ACCOUNT_SUMMARY** – This table has Regulatory Capital specific measures.
- **FCT_ECO_CAPITAL_ACCOUNT_SUMMARY** – This table has Economic Capital specific measures.

Data Flow

The following diagram depicts the flow of data into account summary tables:

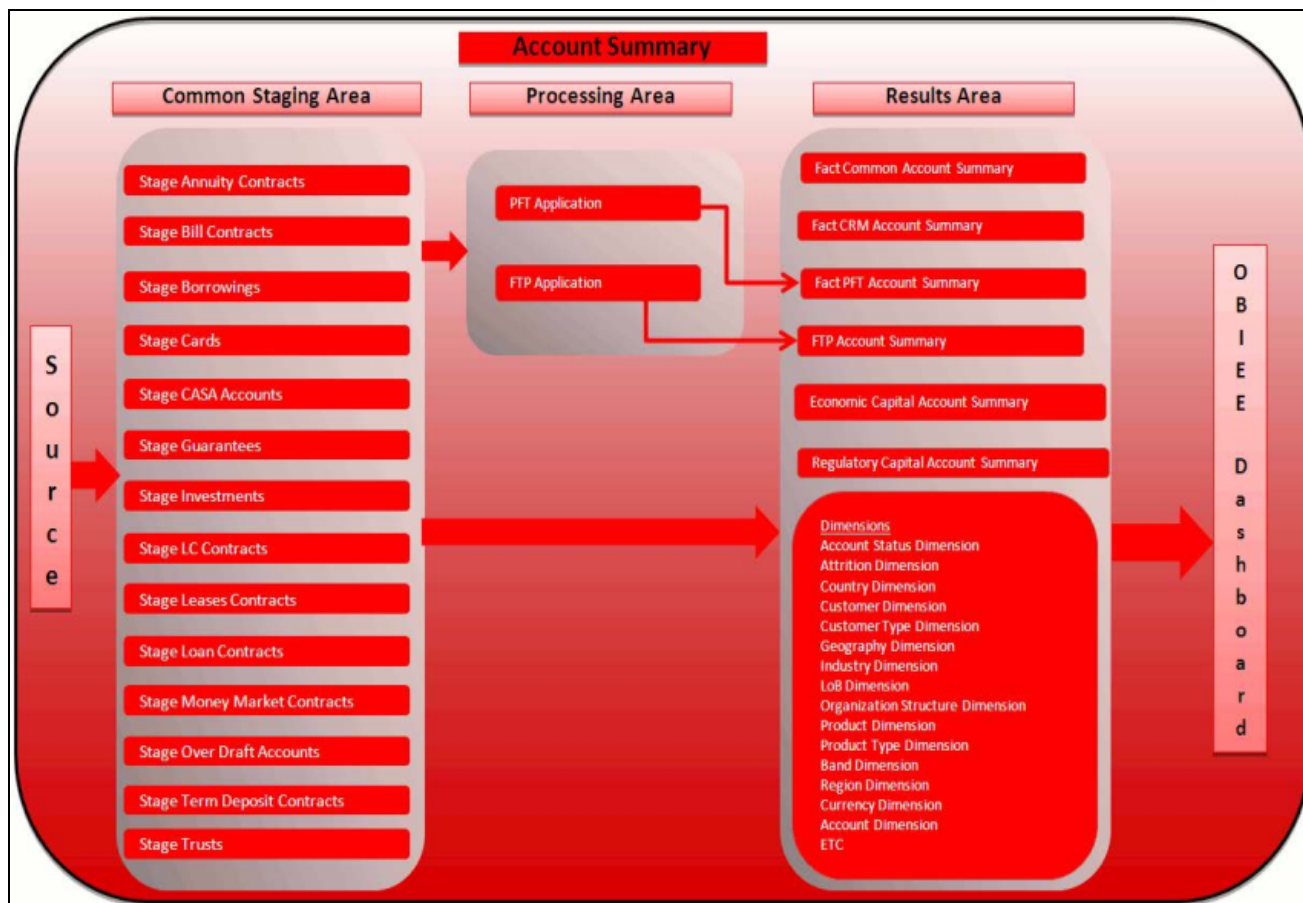


Figure 24. Account summary tables

Overview of Account Summary Population

Table to Table seeded definitions are provided for loading data into Common Account Summary and CRM Account summary tables.

Following are the lists for the same:

- Common Account Summary

Table 17. Common Account Summary definitions

SLNo	Source Table	T2T Definition Name	Destination Table
1	STG_ANNUIITY_CONTRACTS	T2T_STG_ANNUIITY_CONTRACTS_CAS	FCT_COMMON_ACCOUNT_SUMMARY
2	STG_BILLS_CONTRACTS	T2T_STG_BILLS_CAS	FCT_COMMON_ACCOUNT_SUMMARY
3	STG_BORROWINGS	T2T_STG_BORROWINGS_CAS	FCT_COMMON_ACCOUNT_SUMMARY
4	STG_CARDS	T2T_STG_CARDS_CAS	FCT_COMMON_ACCOUNT_SUMMARY
5	STG_CASA	T2T_STG_CASA_CAS	FCT_COMMON_ACCOUNT_SUMMARY
6	STG_GUARANTEES	T2T_STG_GUARANTEES_CAS	FCT_COMMON_ACCOUNT_SUMMARY
7	STG_INVESTMENTS	T2T_STG_INVESTMENTS_CAS	FCT_COMMON_ACCOUNT_SUMMARY
8	STG_LC_CONTRACTS	T2T_STG_LC_CAS	FCT_COMMON_ACCOUNT_SUMMARY
9	STG_LEASES_CONTRACTS	T2T_STG_LEASES_CONTRACTS_CAS	FCT_COMMON_ACCOUNT_SUMMARY
10	STG_LOAN_CONTRACTS	T2T_STG_LOANS_CAS	FCT_COMMON_ACCOUNT_SUMMARY
11	STG_MM_CONTRACTS	T2T_STG_MM_CAS	FCT_COMMON_ACCOUNT_SUMMARY
12	STG_OD_ACCOUNTS	T2T_STG_OD_CAS	FCT_COMMON_ACCOUNT_SUMMARY
13	STG_TD_CONTRACTS	T2T_STG_TD_CONTRACTS_CAS	FCT_COMMON_ACCOUNT_SUMMARY
14	STG_TRUSTS	T2T_STG_TRUSTS_CAS	FCT_COMMON_ACCOUNT_SUMMARY
15	STG_COMMITMENT_CONTRACTS	T2T_STG_COMMITMENT_CONTRACTS_CAS	FCT_COMMON_ACCOUNT_SUMMARY
16	STG_MUTUAL_FUNDS	T2T_STG_MUTUAL_FUNDS_CAS	FCT_COMMON_ACCOUNT_SUMMARY

- CRM Account Summary

SI No.	Source Table	T2T Definition Name	Destination Table
1	STG_ANNUIITY_CONTRACTS	T2T_STG_CRMAS_ANNUIITY_CONTRACTS	FCT_CRM_ACCOUNT_SUMMARY
2	STG_BILLS_CONTRACTS	T2T_STG_CRMAS_BILLS_CONTRACTS	FCT_CRM_ACCOUNT_SUMMARY
3	STG_BORROWINGS	T2T_STG_CRMAS_BORROWINGS	FCT_CRM_ACCOUNT_SUMMARY
4	STG_CARDS	T2T_STG_CRMAS_CARDS	FCT_CRM_ACCOUNT_SUMMARY
5	STG_CASA	T2T_STG_CRMAS_CASA	FCT_CRM_ACCOUNT_SUMMARY
6	STG_GUARANTEES	T2T_STG_CRMAS_GUARANTEES	FCT_CRM_ACCOUNT_SUMMARY
7	STG_INVESTMENTS	T2T_STG_CRMAS_INVESTMENTS	FCT_CRM_ACCOUNT_SUMMARY
8	STG_LC_CONTRACTS	T2T_STG_CRMAS_LC_CONTRACTS	FCT_CRM_ACCOUNT_SUMMARY
9	STG_LEASES_CONTRACTS	T2T_STG_CRMAS_LEASES_CONTRACTS	FCT_CRM_ACCOUNT_SUMMARY
10	STG_LOAN_CONTRACTS	T2T_STG_CRMAS_LOAN_CONTRACTS	FCT_CRM_ACCOUNT_SUMMARY
11	STG_MM_CONTRACTS	T2T_STG_CRMAS_MM_CONTRACTS	FCT_CRM_ACCOUNT_SUMMARY
12	STG_OD_ACCOUNTS	T2T_STG_CRMAS_OD_ACCOUNTS	FCT_CRM_ACCOUNT_SUMMARY
13	STG_TD_CONTRACTS	T2T_STG_CRMAS_TD_CONTRACTS	FCT_CRM_ACCOUNT_SUMMARY
14	STG_TRUSTS	T2T_STG_CRMAS_TRUSTS	FCT_CRM_ACCOUNT_SUMMARY
15	STG_COMMITMENT_CONTRACTS	T2T_STG_CRMAS_COMMITMENTS	FCT_CRM_ACCOUNT_SUMMARY
16	STG_MUTUAL_FUNDS	T2T_STG_CRMAS_MUTUAL_FUNDS	FCT_COMMON_ACCOUNT_SUMMARY

- FTP Account Summary

Table 18. FTP Account Summary definitions

SI No	Source Table	T2T Definition Name	Destination Table
1	FSI_D_ANNUITY_CONTRACTS	T2T_FCT_FTP_ACCOUNT_ANNUIT Y	FCT_FTP_ACCOUNT_SUMMA RY
2	FSI_D_BORROWINGS	T2T_FCT_FTP_ACCOUNT_BORROW INGS	FCT_FTP_ACCOUNT_SUMMA RY
3	FSI_D_CASA	T2T_FCT_FTP_ACCOUNT_CASA	FCT_FTP_ACCOUNT_SUMMA RY
4	FSI_D_CREDIT_LINES	T2T_FCT_FTP_ACCOUNT_CREDIT_ LINES	FCT_FTP_ACCOUNT_SUMMA RY
5	FSI_D_CREDIT_CARDS	T2T_FCT_FTP_ACCOUNT_CREDITC ARDS	FCT_FTP_ACCOUNT_SUMMA RY
6	FSI_D_GUARANTEES	T2T_FCT_FTP_ACCOUNT_GUARAN TEES	FCT_FTP_ACCOUNT_SUMMA RY
7	FSI_D_INVESTMENTS	T2T_FCT_FTP_ACCOUNT_INVESTM ENTS	FCT_FTP_ACCOUNT_SUMMA RY
8	FSI_D_LEASES	T2T_FCT_FTP_ACCOUNT_LEASES	FCT_FTP_ACCOUNT_SUMMA RY
9	FSI_D_LOAN_CONTRACTS	T2T_FCT_FTP_ACCOUNT_LOANS	FCT_FTP_ACCOUNT_SUMMA RY
10	FSI_D_MM_CONTRACTS	T2T_FCT_FTP_ACCOUNT_MM_CO NTRACTS	FCT_FTP_ACCOUNT_SUMMA RY
11	FSI_D_MORTGAGES	T2T_FCT_FTP_ACCOUNT_MORTGA GES	FCT_FTP_ACCOUNT_SUMMA RY
12	FSI_D_TERM_DEPOSITS	T2T_FCT_FTP_ACCOUNT_TDEPOSI TS	FCT_FTP_ACCOUNT_SUMMA RY
13	FSI_D_TRUSTS	T2T_FCT_FTP_ACCOUNT_TRUSTS	FCT_FTP_ACCOUNT_SUMMA RY
14	FSI_D_MUTUAL_FUNDS	T2T_FCT_FTP_ACCOUNT_MUTUAL _FUND	FCT_FTP_ACCOUNT_SUMMA RY

- PFT Account Summary

Table 19. PFT Account Summary definitions

SI No	Source Table	T2T Definition Name	Destination Table
1	FSI_D_ANNUITY_CONTRACTS	T2T_FCT_PFT_ACCOUNT_ANNUIT Y	FCT_PFT_ACCOUNT_SUM MARY
2	FSI_D_BORROWINGS	T2T_FCT_PFT_ACCOUNT_BORROW INGS	FCT_PFT_ACCOUNT_SUM MARY

Table 19. PFT Account Summary definitions

3	FSI_D_CASA	T2T_FCT_PFT_ACCOUNT_CASA	FCT_PFT_ACCOUNT_SUMMARY
4	FSI_D_CREDIT_LINES	T2T_FCT_PFT_ACCOUNT_CREDIT_LINES	FCT_PFT_ACCOUNT_SUMMARY
5	FSI_D_CREDIT_CARDS	T2T_FCT_PFT_ACCOUNT_CREDITCARDS	FCT_PFT_ACCOUNT_SUMMARY
6	FSI_D_GUARANTEES	T2T_FCT_PFT_ACCOUNT_GUARANTEES	FCT_PFT_ACCOUNT_SUMMARY
7	FSI_D_INVESTMENTS	T2T_FCT_PFT_ACCOUNT_INVESTMENTS	FCT_PFT_ACCOUNT_SUMMARY
8	FSI_D_LEASES	T2T_FCT_PFT_ACCOUNT_LEASES	FCT_PFT_ACCOUNT_SUMMARY
9	FSI_D_LOAN_CONTRACTS	T2T_FCT_PFT_ACCOUNT_LOANS	FCT_PFT_ACCOUNT_SUMMARY
10	FSI_D_MORTGAGES	T2T_FCT_PFT_ACCOUNT_MORTGAGES	FCT_PFT_ACCOUNT_SUMMARY
11	FSI_D_TERM_DEPOSITS	T2T_FCT_PFT_ACCOUNT_DEPOSITS	FCT_PFT_ACCOUNT_SUMMARY
12	FSI_D_TRUSTS	T2T_FCT_PFT_ACCOUNT_TRUSTS	FCT_PFT_ACCOUNT_SUMMARY
13	FSI_D_MUTUAL_FUNDS	T2T_FCT_PFT_ACCOUNT_MUTUAL_FUND	FCT_PFT_ACCOUNT_SUMMARY

Prerequisites

1. All the post install steps mentioned in the *Oracle Financial Services Analytical Applications Infrastructure (OFSAAI) Installation and Configuration guide* and the solution installation manual have to be completed successfully.
2. Application User must be mapped to a role that has seeded batch execution function (BATPRO).
3. Before executing a batch, check if the following services are running on the application server (For more information on how to check if the services are up and on, and how to start the services if you find them not running, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*).
 - Iccserver
 - Router
 - AM Server
 - Messageserver
4. Batches will have to be created for executing. This is explained in Executing the Account Summary Population T2T section.

5. Dimension Population should have been done before you execute the T2T batch. (For more information, refer to Chapter 3, "Dimension Loading Process," and Chapter 4, "Time Dimension Population,")

Fact Common Account Summary

Following are the lists of tables used in the population of Fact Common Account Summary & Fact CRM Account Summary tables.

Following mentioned Dimension tables are required to be loaded prior to executing the T2T:

- DIM_DATES
- DIM_ACCOUNT
- DIM_CUSTOMER
- DIM_PRODUCT
- DIM_CHANNEL
- DIM_BANDS
- DIM_ORG_STRUCTURE and so on.

Fact CRM Account Summary

Fact Common Account Summary entity needs to be populated before executing the Fact CRM Account Summary T2Ts.

Following are the list of tables used in the population of Fact CRM Account Summary and these tables are required to be loaded prior to running the T2T:

- DIM_DATES
- DIM_ACCOUNT
- FCT_COMMON_ACCOUNT_SUMMARY
- DIM_ACCT_STATUS
- DIM_BANDS
- DIM_CHANNEL
- DIM_CUSTOMER
- DIM_ORG_STRUCTURE
- DIM_LOB
- DIM_OFFER
- DIM OPPORTUNITY
- DIM_PRODUCT
- DIM_PROSPECT
- DIM_RETENTION_OFFER_TYPE

- DIM_SALES_REPRESENTATIVE
- DIM_TREATMENT
- DIM_VINTAGE

For details on populating dimension tables like DIM_CUSTOMER, DIM_BANDS, and so on, refer to the section Dimension Tables Population.

For details on populating DIM_DATES dimension table, refer to section Overview of Time Dimension Population.

For identifying fields required in Channel Transaction tables in staging for the purpose of Customer Insight Application(s), refer to *Download Specification*.

For more information on the dimensions, refer to *ERwin Datamodel*.

Executing the Account Summary Population T2T

Fact Common Account Summary table has to be loaded prior loading any of the other Account Summary tables.

You can execute the T2T component from OFSAA Infrastructure ICC framework (accessed through the application Batch Operations screen).

Fact Common Account Summary

A seeded batch, <Infodom>_aCRM_Comm_Acc_Summ has to be executed for the required MIS Date.

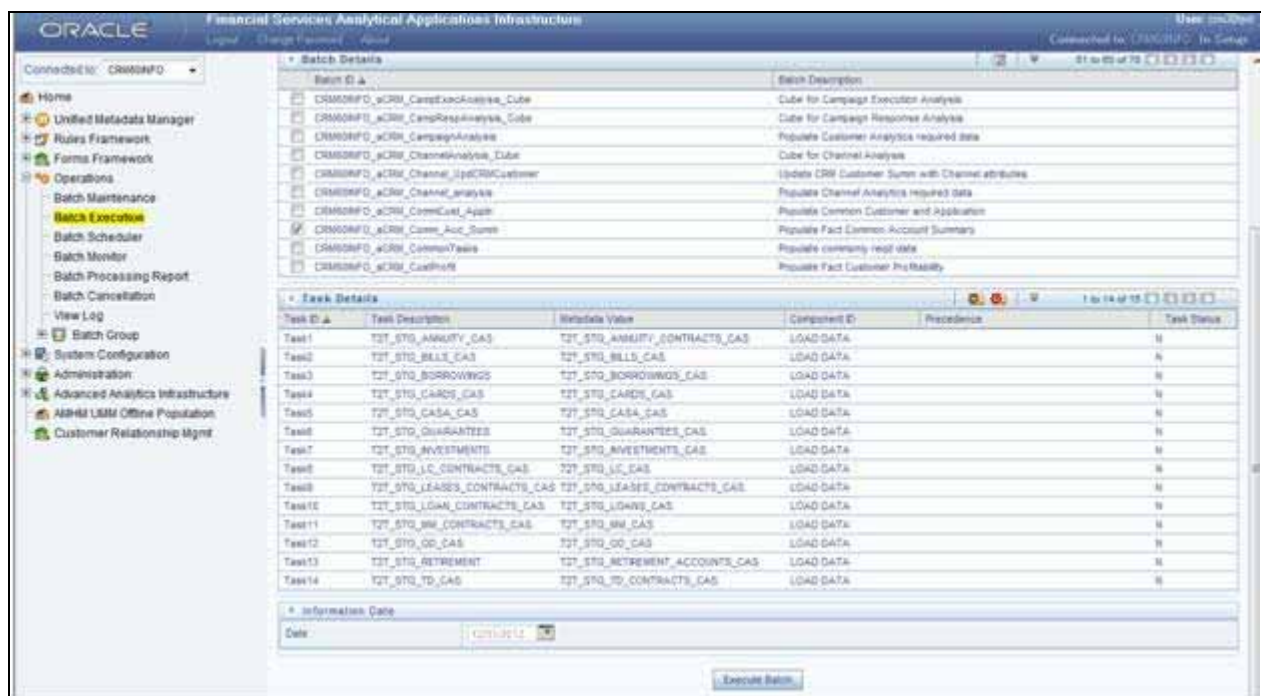


Figure 25. <Infodom>_aCRM_Comm_Acc_Summ

Alternatively, following steps will help you create a new batch:

1. From the **Home** menu, click **Operations** and select **Batch Maintenance**.

2. Click **New Batch** ('+' symbol in Batch Name container). Enter the **Batch Name** and **Description**.
3. Click **Save**.
4. Click the check box in the **Batch Name** container to select the **Batch**, you created in the earlier step.
5. Enter the **Task ID** and **Description**.
6. Select **Load Data** from the Components list.
7. Select the following from the Dynamic Parameters List and click **Save**.
 - **Datastore Type** - Select the appropriate datastore from the list.
 - **Datastore Name** - Select the appropriate name from the list.
 - **IP address** - Select the IP address from the list.
 - **Load Mode** - Select Table to Table from the list.
 - **Source Name** - Select <T2T Source Name> from the list.
 - **File Name** - Select the T2T name for the source stage channel table you want to process.
8. Data file name will be blank for any Table to Table Load mode. Default value refers to currency calculation. If there is any need for currency conversion in T2T transactions, Default value has to be provided. For example, default value is [DRCY]='USD' Here 'USD' acts as reporting currency parameter to T2T.
9. Repeat steps 4 to 8 for adding the remaining T2Ts within the same batch definition.
10. Execute the batch created in the preceding steps.

For more information, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Fact FTP Account Summary

A seeded batch, <INFODOM>_FTP_Account_Summary has to be executed for the required MIS Date.

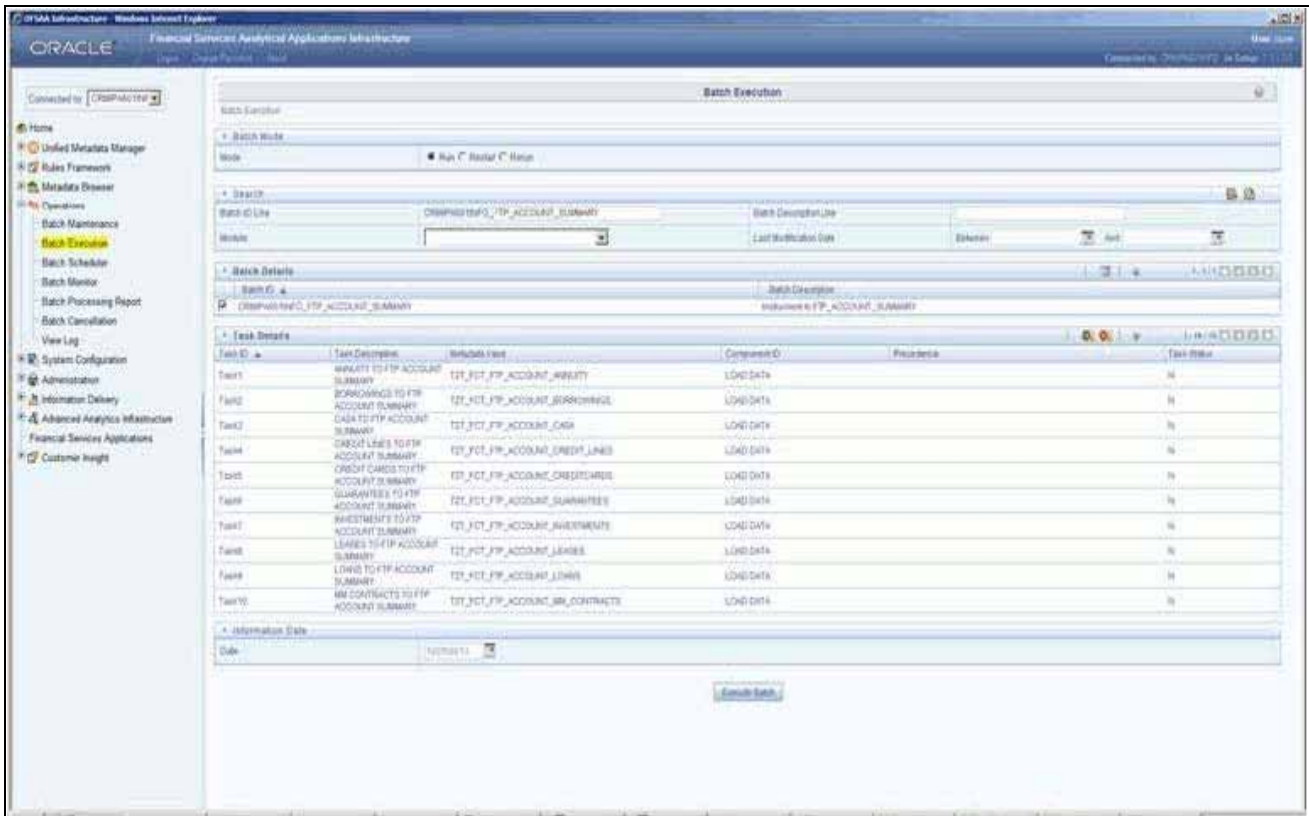


Figure 26. <INFORMATIONS>_FTP_Account_Summary

Alternatively, following steps will help you create a new batch:

1. From the **Home** menu, click **Operations** and select **Batch Maintenance**.
2. Click **New Batch** ('+' symbol in Batch Name container). Enter the **Batch Name** and **Description**.
3. Click **Save**.
4. Click the check box in the **Batch Name** container to select the Batch, you created in the earlier step.
5. Enter the **Task ID** and **Description**.
6. Select **Load Data** from the Components list.
7. Select the following from the Dynamic Parameters List and click **Save**.
 - **Datastore Type** - Select the appropriate datastore from the list.
 - **Datastore Name** - Select the appropriate name from the list.
 - **IP address** - Select the IP address from the list.
 - **Load Mode** - Select Table to Table from the list.
 - **Source Name** - Select <T2T Source Name> from the list.
 - **File Name** - Select the T2T name for the source stage channel table you want to process.

8. Data file name will be blank for any Table to Table Load mode. Default value refers to currency calculation. If there is any need for currency conversion in T2T transactions, Default value has to be provided. For example, default value is [DRCY]='USD'. Here 'USD' acts as reporting currency parameter to T2T.
9. Repeat steps 4 to 8 for adding the remaining T2Ts within the same batch definition.
10. Execute the batch created in the preceding steps.

For more information, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Fact PFT Account Summary

A seeded batch, <INFOCOM>_PFT_ACCOUNT_SUMMARY has to be executed for the required MIS Date.

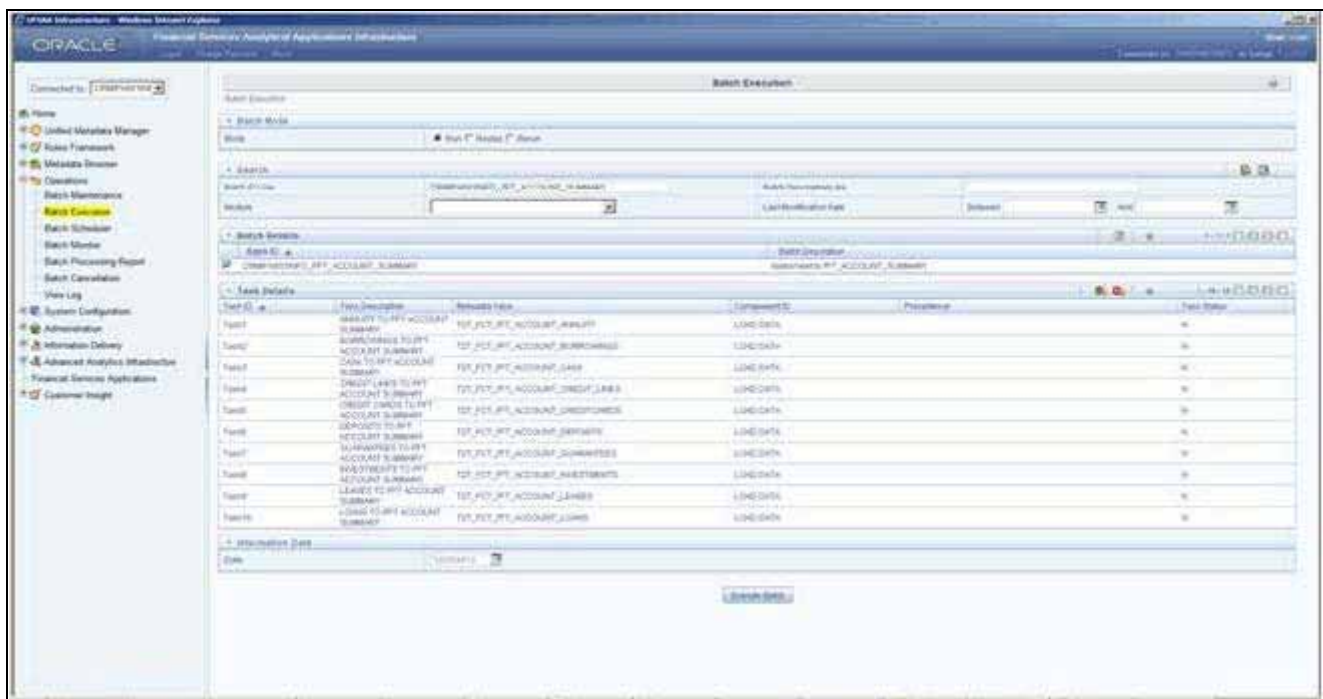


Figure 27. <INFOCOM>_PFT_ACCOUNT_SUMMARY

Alternatively, following steps will help you create a new batch:

1. From the **Home** menu, click **Operations** and select **Batch Maintenance**.
2. Click **New Batch** ('+' symbol in Batch Name container). Enter the **Batch Name** and **Description**.
3. Click **Save**.
4. Click the check box in the **Batch Name** container to select the **Batch**, you created in the earlier step.
5. Create a new task, enter the **Task ID** and **Description**.
6. Select **Load Data** from the Components list.
7. Select the following from the Dynamic Parameters List and click **Save**.
 - **Datastore Type** - Select the appropriate datastore from the list.

- **Datastore Name** - Select the appropriate name from the list.
 - **IP address** - Select the IP address from the list.
 - **Load Mode** - Select Table to Table from the list.
 - **Source Name** - Select <T2T Source Name> from the list.
 - **File Name** - Select the T2T name for the source stage channel table you want to process.
8. Data file name will be blank for any Table to Table Load mode. Default value field will be blank for CRM account summary T2Ts.
 9. Repeat steps 4 to 8 for adding the remaining T2Ts within the same batch definition.
 10. Create a Task by repeating steps 4 and 5.
 11. Select **Transform Data** from components list.
 12. Select the following from the Dynamic Parameters List and click **Save**.
 - **Datastore Type** - Select the appropriate datastore from the list.
 - **Datastore Name** - Select the appropriate name from the list.
 - **IP address** - Select the IP address from the list.
 - **Rule Name** - Select **fn_run_exe_param** from the list.
 - **Parameter List** - Pass the values 1, 180, '\$RUNSK= -1', 'USD'.

It is mandatory to pass all the five parameters. Currently, the first three does not have functional significance. The last two parameters are "Run Skey" and "Reporting Currency" values, that needs to be passed as required. If the batch is being re-run, make sure the run skey value passed is higher than the values (if any) found in "FCT_CRM_ACCOUNT_SUMMARY". If the "run_exe_parameters" table already have an entry for the desired Run Skey, delete the row from the "run_exe_parameters" table before executing the batch.

13. To set this task as a precedent task to each of the other tasks in this batch, click the **Precedence** button in the **Task Details** pane.
14. Execute the batch created in the preceding steps.

For more information, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Fact CRM Account Summary

A seeded batch, <Infodom>_aCRM_CRM_Acc_Summ has to be executed for the required MIS Date.

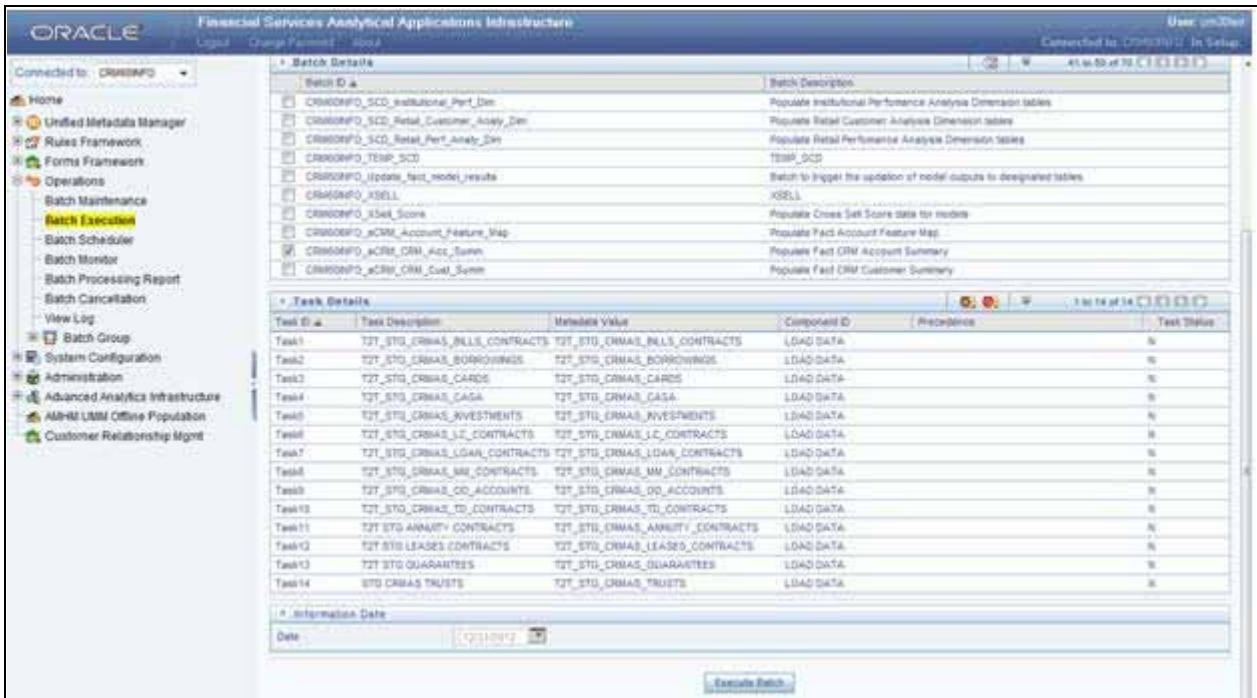


Figure 28. <Infodom>_aCRM_CRM_Acc_Summ

Alternatively, following steps will help you create a new batch:

1. From the **Home** menu, click **Operations** and select **Batch Maintenance**.
2. Click **New Batch** (+ symbol in Batch Name container). Enter the **Batch Name** and **Description**.
3. Click **Save**.
4. Click the check box in the **Batch Name** container to select the **Batch**, you created in the earlier step.
5. Create a new task, enter the **Task ID** and **Description**.
6. Select **Load Data** from the Components list.
7. Select the following from the Dynamic Parameters List and click **Save**.
 - **Datastore Type** - Select the appropriate datastore from the list.
 - **Datastore Name** - Select the appropriate name from the list.
 - **IP address** - Select the IP address from the list.
 - **Load Mode** - Select **Table to Table** from the list.
 - **Source Name** - Select <T2T Source Name> from the list.
 - **File Name** - Select the T2T name for the source stage product processor table you want to process.
8. Data file name will be blank for any Table to Table Load mode. Default value field will be blank for CRM account summary T2Ts.
9. Repeat steps 4 to 8 for adding the remaining T2Ts within the same batch definition.
10. Create a Task by repeating the steps 4 and 5.

11. Select **Transform Data** from components list.
12. Select the following from the Dynamic Parameters List and click **Save**.
 - **Datastore Type** - Select the appropriate datastore from the list.
 - **Datastore Name** - Select the appropriate name from the list.
 - **IP address** - Select the IP address from the list.
 - **Rule Name** - Select **fn_run_exe_param** from the list.
 - **Parameter List** - Pass the values 1, 180, '\$RUNSK = -1', 'USD'.

It is mandatory to pass all the five parameters. Currently, the first three does not have functional significance. The last two parameters are "Run Skey" and "Reporting Currency" values, that needs to be passed as required. If the batch is being re-run, please make sure the run skey value passed is higher than the values (if any) found in "FCT_CRM_ACCOUNT_SUMMARY".

13. To set this task as a precedent task to each of the other tasks in this batch, click the **Precedence** button in the **Task Details** pane.
14. Execute the batch created in the preceding steps.

For more information, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Checking the Execution Status

The status of execution can be monitored using the Batch Monitor screen.

Note: For a more comprehensive coverage of configuration and execution of a batch, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

The status messages in Batch Monitor are :

- N - Not Started
- O - On Going
- F - Failure
- S – Success

The execution log can be accessed on the application server in the following directory: \$FIC_DB_HOME/log/t2t.

The file name will have the batch execution id.

The following tables can be queried for errors:

- FCT_COMMON_ACCOUNT_SUMMARY\$
- FCT_CRM_ACCOUNT_SUMMARY\$

Account Summary T2Ts

T2T definitions can be retrieved as an excel document for reference from the metadata browser of the Unified Metadata Manager (UMM) component of OFSAAI.

This chapter discusses the following topics:

- [Overview](#)
- [Table to Table](#)
- [Executing the Fact Transaction Summary](#)

Overview

The Fact Transaction Summary stores data from the stage transactions table for further operation reporting. The data is moved through a T2T process from stage to fact, which ensures that the stage data is available in a single table in the result area.

Table to Table

Table to Table seeded definitions are provided for loading data into Common Account Summary.

Table 20. Common Account Summary T2T Definitions

SI No.	Source Table Name	T2T Definition Name	Target Table Name
1	STG_TRUSTS_TXNS	STG_TRUSTS_TXNS_FTS	FCT_TRANSACTION_SUMMARY
2	STG_ANNUITY_TXNS	STG_ANNUITY_TXN_FTS	FCT_TRANSACTION_SUMMARY
3	STG_BILL_CONTRACTS_TXNS	STG_BILL_CONTRACTS_TXNS_FTS	FCT_TRANSACTION_SUMMARY
4	STG_BORROWING_COMMITMENT_TXNS	STG_BORROWING_COMMITMENT_TXNS_FTS	FCT_TRANSACTION_SUMMARY
5	STG_BORROWINGS_TXNS	STG_BORROWINGS_TXNS_FTS	FCT_TRANSACTION_SUMMARY
6	STG_CARDS_PAYMENT_TXNS	STG_CARDS_PAYMENT_TXNS_FTS	FCT_TRANSACTION_SUMMARY
7	STG_CARDS_SETTLEMENT_TXNS	STG_CARDS_SETTLEMENT_TXNS_FTS	FCT_TRANSACTION_SUMMARY
8	STG_CASA_TXNS	STG_CASA_TXNS_FTS	FCT_TRANSACTION_SUMMARY
9	STG_COMMITMENT_CONTRACT_TXNS	STG_COMMITMENT_CONTRACT_TXNS_FTS	FCT_TRANSACTION_SUMMARY

Table 20. Common Account Summary T2T Defintions

10	STG_COMMODITIES_TXNS	STG_COMMODITIES_TXNS_FTS	FCT_TRANSACTION_SUMMARY
11	STG_CORRESPONDENT_ACCT_TXNS	STG_CORRESPONDENT_ACCT_TXNS_FTS	FCT_TRANSACTION_SUMMARY
12	STG_CREDIT_DERIVATIVES_TXNS	STG_CREDIT_DERIVATIVES_TXNS_FTS	FCT_TRANSACTION_SUMMARY
13	STG_FOREX_TXNS_FTS	STG_FOREX_TXNS_FTS	FCT_TRANSACTION_SUMMARY
14	STG_GUARANTEES_TXNS	STG_GUARANTEES_TXNS_FTS	FCT_TRANSACTION_SUMMARY
15	STG_IJARAH_TXNS	STG_IJARAH_TXNS_FTS	FCT_TRANSACTION_SUMMARY
16	STG_INTERBANK_TXNS	STG_INTERBANK_TXNS_FTS	FCT_TRANSACTION_SUMMARY
17	STG_INVESTMENT_TXNS	STG_INVESTMENT_TXNS_FTS	FCT_TRANSACTION_SUMMARY
18	STG_ISTISNA_TXNS	STG_ISTISNA_TXNS_FTS	FCT_TRANSACTION_SUMMARY
19	STG_LC_TXNS	STG_LC_TXNS_FTS	FCT_TRANSACTION_SUMMARY
20	STG_LEASES_TXNS	STG_LEASES_TXNS_FTS	FCT_TRANSACTION_SUMMARY
21	STG_LOAN_CONTRACT_TXNS	STG_LOAN_CONTRACT_TXNS_FTS	FCT_TRANSACTION_SUMMARY
22	STG_MERCHANT_CARDS_TXNS	STG_MERCHANT_CARDS_TXNS_FTS	FCT_TRANSACTION_SUMMARY
23	STG_MM_TXNS	STG_MM_TXNS_FTS	FCT_TRANSACTION_SUMMARY
24	STG_MURABAHAH_TXNS	STG_MURABAHAH_TXNS_FTS	FCT_TRANSACTION_SUMMARY
25	STG_MUSHARAKAH_TXNS	STG_MUSHARAKAH_TXNS_FTS	FCT_TRANSACTION_SUMMARY
26	STG_OD_ACCOUNTS_TXNS	STG_MUTUAL_FUNDS_TXNS_FTS	FCT_TRANSACTION_SUMMARY
27	STG_OD_ACCOUNTS_TXNS	STG_OD_ACCOUNTS_TXNS_FTS	FCT_TRANSACTION_SUMMARY
28	STG_OPTION_CONTRACTS_TXNS	STG_OPTION_CONTRACTS_TXNS_FTS	FCT_TRANSACTION_SUMMARY

Table 20. Common Account Summary T2T Defintions

29	STG_RETIREMENT_ACCOUNTS_TXNS	STG_RETIREMENT_ACCOUNTS_TXNS_FTS	FCT_TRANSACTION_SUMMARY
30	STG_SALAM_TXNS	STG_SALAM_TXNS_FTS	FCT_TRANSACTION_SUMMARY
31	STG_SUKUK_TXNS	STG_SUKUK_TXNS_FTS	FCT_TRANSACTION_SUMMARY
32	STG_SWAP_ACCOUNT_TXNS	STG_SWAP_ACCOUNT_TXNS_FTS	FCT_TRANSACTION_SUMMARY
33	STG_TERMDEPOSITS_TXNS	STG_TERMDEPOSITS_TXNS_FTS	FCT_TRANSACTION_SUMMARY
34	STG_TRADING_ACCOUNT_TXNS	STG_TRADING_ACCOUNT_TXNS_FTS	FCT_TRANSACTION_SUMMARY
35	STG_FUTURES_TXNS	STG_FUTURES_TXNS_FTS	FCT_TRANSACTION_SUMMARY
36	STG_MUDARABAH_TXNS	STG_MUDARABAH_TXNS_FTS	FCT_TRANSACTION_SUMMARY

Executing the Fact Transaction Summary

Fact Transaction Summary table has to be loaded prior loading any of the other Account Summary tables. You can execute the T2T component from OFSAA Infrastructure ICC framework (accessed through the application Batch Operations screen).

Fact Common Account Summary - Batch Execution

A seeded batch, Infodom__STG_TO_FTS has to be executed for the required MIS Date.

Alternatively, following steps will help you create a new batch:

1. From the **Home** menu, click **Operations** and select **Batch Maintenance**.
2. Click **New Batch** ('+' symbol in Batch Name container). Enter the Batch Name and Description.
3. Click **Save**.
4. Click the check box in the Batch Name container to select the Batch, you created in earlier step.
5. Enter the **Task ID** and **Description**.
6. Select **Load Data** from the Components list.
7. Select the following from the Dynamic Parameters List:
 - Data Store Type

- Datastore Name - Select the appropriate name from the list.
- IP address - Select the IP address from the list.
- Load Mode - Select Table to Table from the list.
- Source Name - Select <T2T Source Name> from the list.
- File Name - Select the T2T name for the source stage channel table you want to process.

8. Click **Save**.

Data file name will be blank for any Table to Table Load mode.

Default value refers to currency calculation. If there is any need for currency conversion in T2T transactions, Default value has to be provided.

For example, default value is [DRCY] = 'USD' Here 'USD' acts as reporting currency parameter to T2T.

9. Repeat steps 4 to 8 for adding the remaining T2Ts within the same batch definition.
10. Execute the batch created in the preceding steps.

This chapter explains the process flow for populating Fact Common Customer Summary table.

This chapter covers the following topics:

- [Overview of Common Customer Summary Tables](#)
- [Prerequisites](#)
- [Executing the Customer Summary Population T2T](#)
- [Error Messages](#)

Overview of Common Customer Summary Tables

Fact Common Customer Summary table stores attributes pertaining to customer related data on an 'as-is' basis received from the source system. Data is populated into this table using T2T.

Customer balances are derived from account summary. Customer relationship table drives the relationship between accounts and customers. Common customer summary data is populated for all the active customers in customer dimension.

Following data flow diagram explains the process flow for populating Fact Common Customer Summary table:

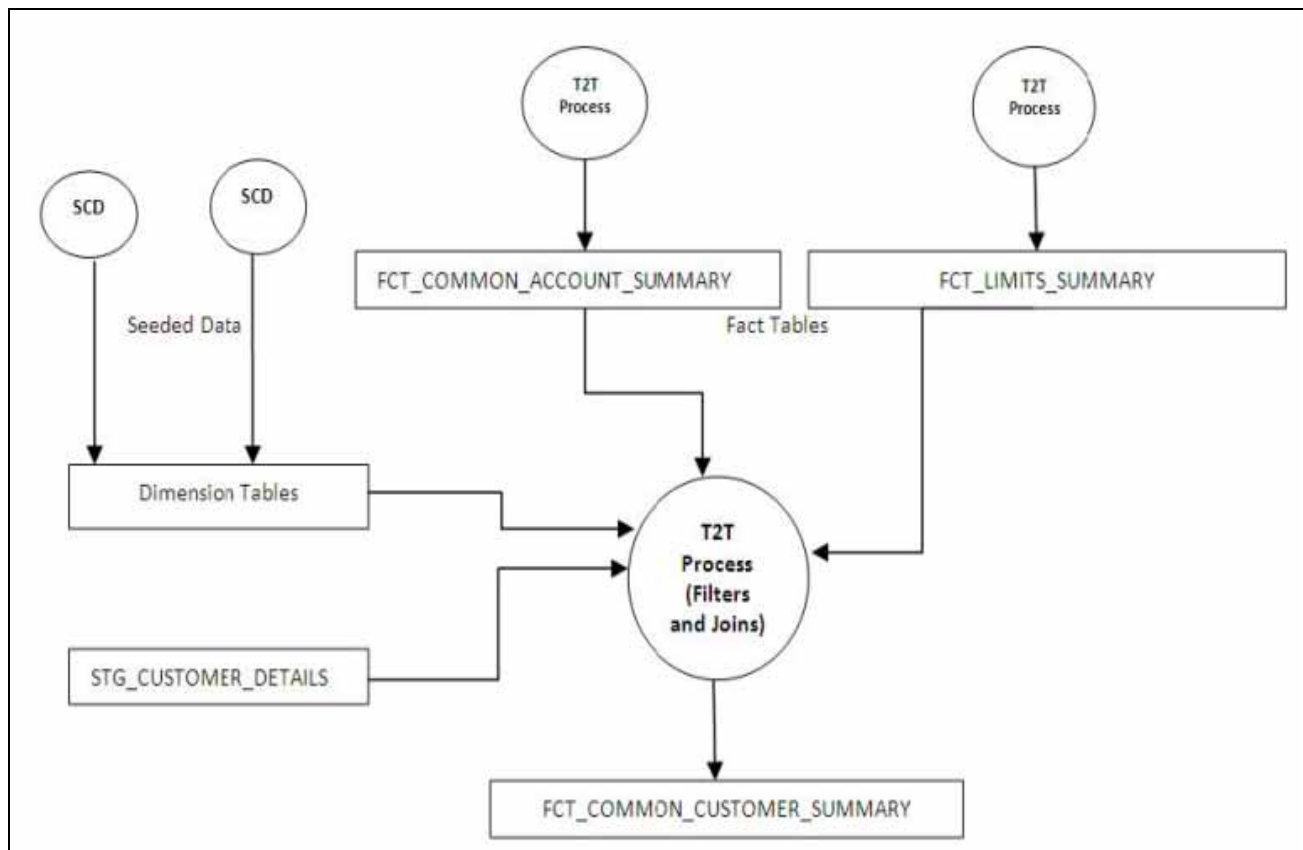


Figure 29. Fact Common Customer Summary dataflow

Prerequisites

Following are the lists of tables used in the population of Fact Common Customer Summary and these tables are required to be loaded prior to running the T2T:

- DIM_CUSTOMER
- DIM_BANDS
- DIM_EDUCATION
- DIM_CUSTOMER_TYPE
- DIM_GENDER
- DIM_INDUSTRY
- DIM_CHANNEL
- DIM_GEOGRAPHY
- DIM_MARITAL_STATUS
- DIM_MANAGEMENT

- DIM_PROFESSION
- DIM_CREDIT_RATING
- DIM_VINTAGE
- DIM_MIGRATION_REASONS
- FCT_COMMON_ACCOUNT_SUMMARY
- FCT_LIMITS_SUMMARY.
- STG_CUSTOMER_DETAILS
- STG_PARTY_RATING_DETAILS
- STG_PARTY_FINANCIALS

Dimensions tables are loaded through the SCD process. The fact tables such as FCT_COMMON_ACCOUNT_SUMMARY and FCT_LIMITS_SUMMARY are loaded from their respective T2T processes.

For more information on SCDs, refer to Chapter 3, "Dimension Loading Process,".

Executing the Customer Summary Population T2T

Fact Common Customer Summary T2T can be executed by executing task present in the seeded batch.

<INFODOM>_aCRM_CommCust_Appln.

Following steps will help you to execute the batch:

1. Navigate to the Batch Execution screen.
2. Select the seeded batch <INFODOM>_aCRM_CommCust_Appln where INFODOM is the information domain where application is installed.
3. Select the AS_OF_DATE for which source customer information is required to be loaded into the table.
4. Click **Execute Batch**.
5. Monitor the status of the batch using Batch Monitor.

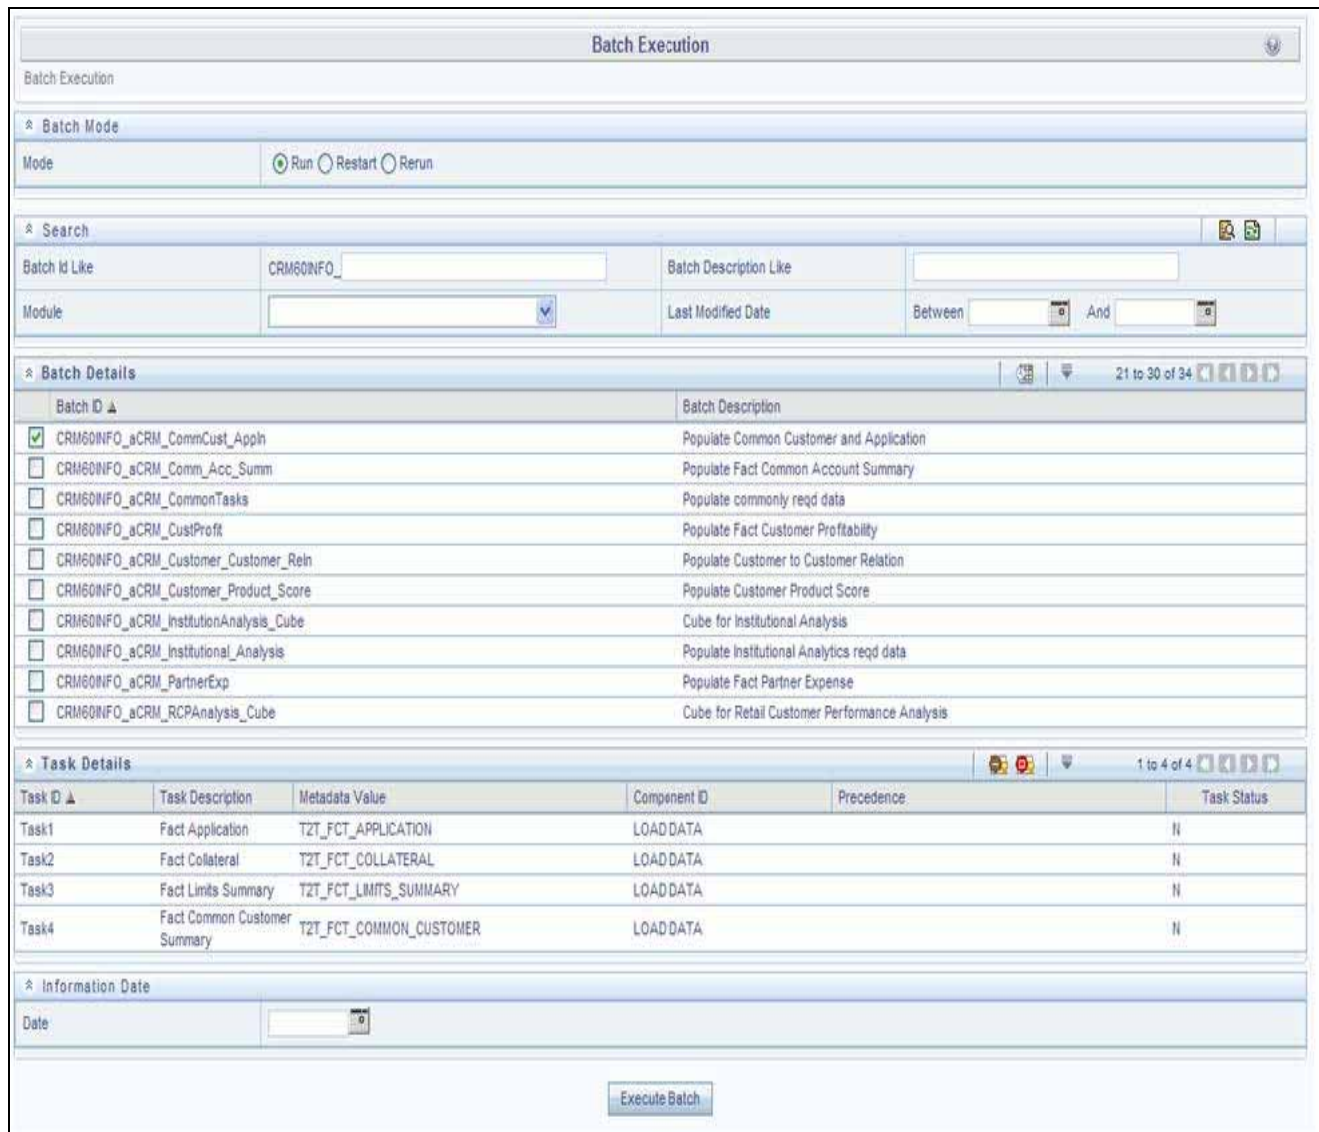


Figure 30. Batch Monitor

Error Messages

Following is the most common error message which will be logged in the T2T log file present in the \$FIC_DB_HOME/logs/t2t folder:

Unique Constraint Violation: This occurs when attempting re-load or loading existing records for the already executed AS_OF_DATE.

This chapter discusses the following topics:

- [Introduction](#)
- [Fact CRM Customer Summary](#)
- [Fact Partner Expense](#)
- [Fact Account Feature Map](#)
- [Fact Customer to Customer Relationship](#)
- [Fact Opportunity](#)
- [Fact Opportunity Activity](#)
- [Fact Sales Representative Compensation](#)
- [Fact Application](#)
- [Account Manager Relation](#)
- [Management Forecast](#)
- [Fact Account Customer Relation](#)
- [Fact Account Profitability](#)

Introduction

This chapter explains all the fact tables which within describe about the seeded T2T Definitions with related Source Table and Destination tables. Prerequisites needed in population of the Fact table and tables required to be loaded prior to running the T2T. Each fact table contains a section on how to execute the T2T component from OFSAA Infrastructure ICC framework and access the execution log to check the execution status.

Fact CRM Customer Summary

Fact CRM Customer Summary entity captures different derived/computed customer attributes pertaining to Customer Insight. Fact Common Customer Summary stores the generic application-agnostic source/raw customer attributes. Fact CRM Customer Summary is a vertical partitioned entity and has relationship to Fact Common Customer Summary.

Load Data into Fact CRM Customer Summary

Customer balances in the Fact CRM Customer Summary entity are derived from account summary. Customer relationship entity drives the relationship between accounts and customers.

Following is the seeded Table-to-Table definitions that loads data related to Fact CRM Customer Summary:

Table 21. Fact CRM Customer Summary definitions

T2T Definition Name	Source Table(s)	Destination Table
T2T_FCT_CRM_CUSTOMER_	STG_CUSTOMER_MASTER	FCT_CRM_CUSTOMER_S
SUMMARY	STG_CUSTOMER_DETAILS	SUMMARY
	FCT_COMMON_ACCOUNT_	
	SUMMARY	
	FCT_CRM_ACCOUNT_SUMMARY	

Refer to *Oracle Financial Services Analytical Applications Data Model Data Dictionary* or the *Erwin Data Model* to view the detailed structure of the tables.

Prerequisites

Fact Common Customer Summary entity needs to be populated before executing the Fact CRM Customer Summary T2T. Refer to Chapter 8, "Account Summary Population," for details related to Fact Common Customer Summary T2T.

Following tables that are used in the population of Fact CRM Customer Summary need to have relevant data prior to executing the T2T:

- STG_CUSTOMER_MASTER - Mandatory
- STG_CUSTOMER_DETAILS - Mandatory
- DIM_DATES - Mandatory
- DIM_CUSTOMER - Mandatory
- FCT_COMMON_ACCOUNT_SUMMARY - Mandatory
- FCT_CRM_ACCOUNT_SUMMARY - Mandatory
- DIM_BANDS - Optional

For details on populating dimension tables like DIM_CUSTOMER, DIM_BANDS, and so on, refer to Chapter 3, "Dimension Loading Process,".

For details on populating DIM_DATES dimension table, refer to Chapter 4, "Time Dimension Population,".

For identifying fields required in Channel Transaction tables in staging for the purpose of Customer Insight Application(s), refer to *Download Specification*.

Also, see Population of Fact CRM Customer Summary and Fact CRM Account Summary sections for details on populating these fact tables.

Executing the Fact CRM Customer Summary Population T2Ts

To execute the T2T component from OFSAA Infrastructure ICC framework (accessed through the Operations module of OFSAAI). A seeded batch,

<Infodom>_aCRM_CRM_Cust_Summ has to be executed for the required MIS Date.

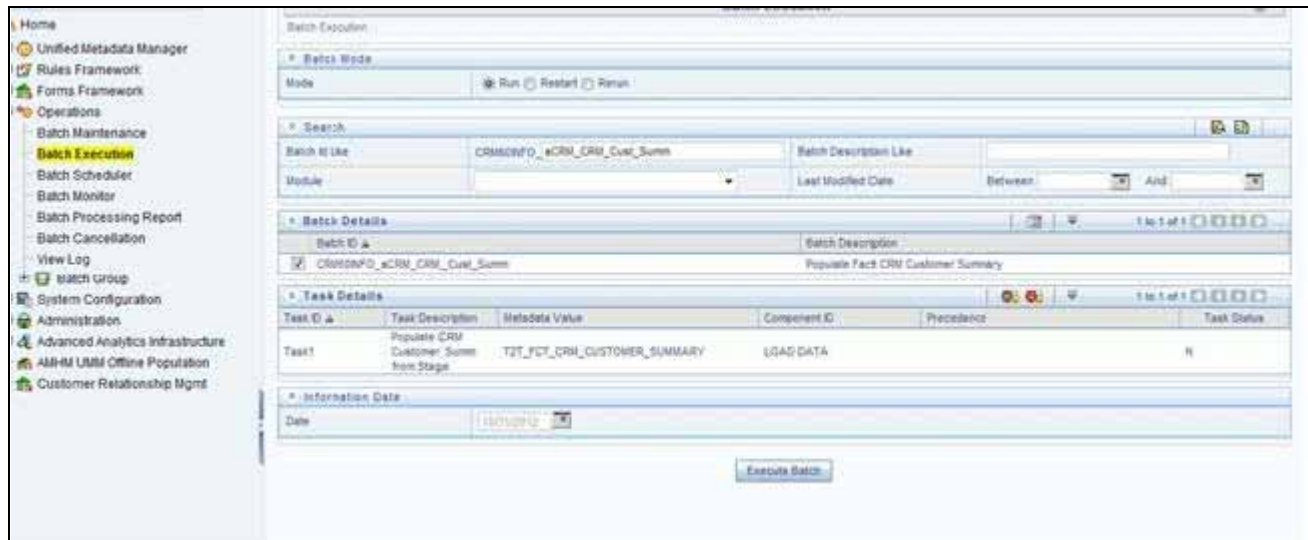


Figure 31. Fact CRM Customer Summary Population

Alternatively, following steps will help you create a new batch:

1. From the **Home** menu, click **Operations** and select **Batch Maintenance**.
2. Click **New Batch** ('+' symbol in Batch Name container). Enter the **Batch Name** and **Description**.
3. Click **Save**.
4. Click the check box in the **Batch Name** container to select the **Batch**, you created in the earlier step.
5. Enter the **Task ID** and **Description**.
6. Select **Load Data** from the Components list.
7. Select the following from the Dynamic Parameters List and click **Save**.
 - **Datastore Type** - Select the appropriate datastore from the list.
 - **Datastore Name** - Select the appropriate name from the list.
 - **IP address** - Select the IP address from the list.
 - **Load Mode** - Select Table to Table from the list.
 - **Source Name** - Select <T2T Source Name> from the list.
 - **File Name** - Select the T2T name "T2T_FCT_CRM_CUSTOMER_SUMMARY" you want to process.
8. Data file name will be blank for any Table to Table Load mode.
9. Default value refers to any parameter that has to be passed to T2T. It has to be blank.

10. Execute the batch created in the preceding steps.

For more information, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Checking the Execution Status

The status of execution can be monitored using the Batch Monitor screen.

The status messages in Batch Monitor are:

- N - Not Started
- O - On Going
- F - Failure
- S – Success

The execution log can be accessed on the application server in the following directory:

`$FIC_DB_HOME/log/t2t.`

The file name will have the batch execution Id.

This table can be queried for errors: FCT_CRM_CUSTOMER_SUMMARY

Note: For more information on configuration and execution of a batch, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Fact Partner Expense

Fact Partner Expense entity stores expense items like marketing cost, total project expense, business development expense, incentive, and so on that are incurred with the partner of financial institutions. These expenses are captured in the Stage Partner Expense entity for every partner and applicable time period.

Following table lists the seeded T2T Definitions with related Source Table and Destination tables:

Table 22. Fact Partner Expense definitions

T2T Definition Name	Source Staging Table	Destination Table
T2T_FCT_PARTNER_EXPENSE	STG_PARTNER_EXPENSE	FCT_PARTNER_EXPENSE

For more information, see Customer Insight Erwin Data Model to view the detailed structure of the tables.

Prerequisites

Following are the lists of tables used in the population of Fact Partner Expense and these are required to be loaded prior to executing the T2T:

- DIM_DATES
- DIM_PARTNER
- STG_PARTNER_EXPENSE

For details on populating dimension tables like DIM_CUSTOMER, DIM_BANDS, and so on, refer to [Chapter 3, "Dimension Loading Process,"](#).

For details on populating DIM_DATES dimension table, refer to Chapter 4, "Time Dimension Population,". For identifying fields required in Channel Transaction tables in staging for the purpose of Customer Insight Application(s), refer to *Download Specification*.

Executing the Fact Partner Expense Population T2T

To execute the T2T component from OFSAA Infrastructure ICC framework (accessed through the application Batch Operations screen).

A seeded batch, <Infodom>_aCRM_PartnerExp has to be executed for the required MIS Date.

The screenshot shows the 'Batch Execution' interface. The 'Batch Mode' section has 'Run' selected. The 'Search' section has 'Batch Id Like' set to 'CRM60NFO_aCRM_PartnerExp' and 'Batch Description Like' set to 'Populate Fact Partner Expense'. The 'Batch Details' section shows a table with one row: 'CRM60NFO_aCRM_PartnerExp' with description 'Populate Fact Partner Expense'. The 'Task Details' section shows a table with one row: 'Task1' with description 'T2T_FCT_PARTNER_EXPENSE', metadata value 'T2T_FCT_PARTNER_EXPENSE', component ID 'LOAD DATA', and task status 'N'. The 'Information Date' section has 'Date' set to '10/31/2010'. An 'Execute Batch' button is at the bottom.

Figure 32. Execute Fact Partner Expense Population

Alternatively, following steps will help you create a new batch:

1. From the **Home** menu, click **Operations** and select **Batch Maintenance**.
2. Click **New Batch** ('+' symbol in Batch Name container). Enter the **Batch Name** and **Description**.
3. Click **Save**.
4. Click the check box in the **Batch Name** container to select the **Batch**, you created in the earlier step.
5. Enter the **Task ID** and **Description**.
6. Select **Load Data** from the Components list.
7. Select the following from the Dynamic Parameters List and click **Save**.
 - **Datastore Type** - Select the appropriate datastore from the list.
 - **Datastore Name** - Select the appropriate name from the list.
 - **IP address** - Select the IP address from the list.

- **Load Mode** - Select **Table to Table** from the list.
- **Source Name** - Select **<T2T Source Name>** from the list.
- **File Name** - Select the T2T name "T2T_FCT_PARTNER_EXPENSE" you want to process.

8. Data file name will be blank for any Table to Table Load mode.

Default value refers to currency calculation. If there is any need for currency conversion in T2T transactions, Default value has to be provided.

For example, default value is [DRCY]='USD' Here 'USD' acts as reporting currency parameter to T2T.

9. Execute the batch created in the preceding steps.

For more information, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Checking the Execution Status

The status of execution can be monitored using the Batch Monitor screen.

The status messages in Batch Monitor are:

- N - Not Started
- O - On Going
- F - Failure
- S - Success

The execution log can be accessed on the application server in the following directory:

`$FIC_DB_HOME/log/t2t.`

The file name will have the batch execution id.

This following table can be queried for errors: FCT_PARTNER_EXPENSES

Note: For more information on configuration and execution of a batch, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Fact Account Feature Map

A product might be facilitated with its own features. Fact Account Feature Map entity stores the mapping between the Account and Product Feature that is the features of the product availed by the customer account. Product processor tables in staging have information related to customer accounts.

Following table lists the seeded T2T Definitions with related Source Table and Destination tables:

Table 23. Fact Account Feature Map definitions

T2T Definition Name	Source Staging Table	Destination Table
T2T_FCT_ACCOUNT_FEATURE_MAP	STG_ACCT_FEATURE_MAP	FCT_ACCOUNT_FEATURE_MAP

For more information, see Customer Insight Erwin Data Model to view the detailed structure of the tables.

Prerequisites

Following are the lists of tables used in the population of Fact Account Feature Map and these tables are required to be loaded prior to executing the T2T:

- DIM_DATES
- DIM_PRODUCT_FEATURE
- DIM_ACCOUNT
- DIM_CUSTOMER
- DIM_PRODUCT
- DIM_VENDOR
- DIM_CHANNEL
- STG_ACCT_FEATURE_MAP

For details on populating dimension tables like DIM_CUSTOMER, DIM_BANDS, and so on, refer to Chapter 3, "Dimension Loading Process,".

For details on populating DIM_DATES dimension table, refer to Chapter 4, "Time Dimension Population,".

For identifying fields required in Channel Transaction tables in staging for the purpose of Customer Insight Application(s), refer to *Download Specification*.

Executing the Fact Account Feature Map Population T2T

To execute the T2T component from OFSAA Infrastructure ICC framework (accessed through the application Batch Operations screen).

A seeded batch, <Infodom>_aCRM_Account_Feature_Map has to be executed for the required MIS Date.

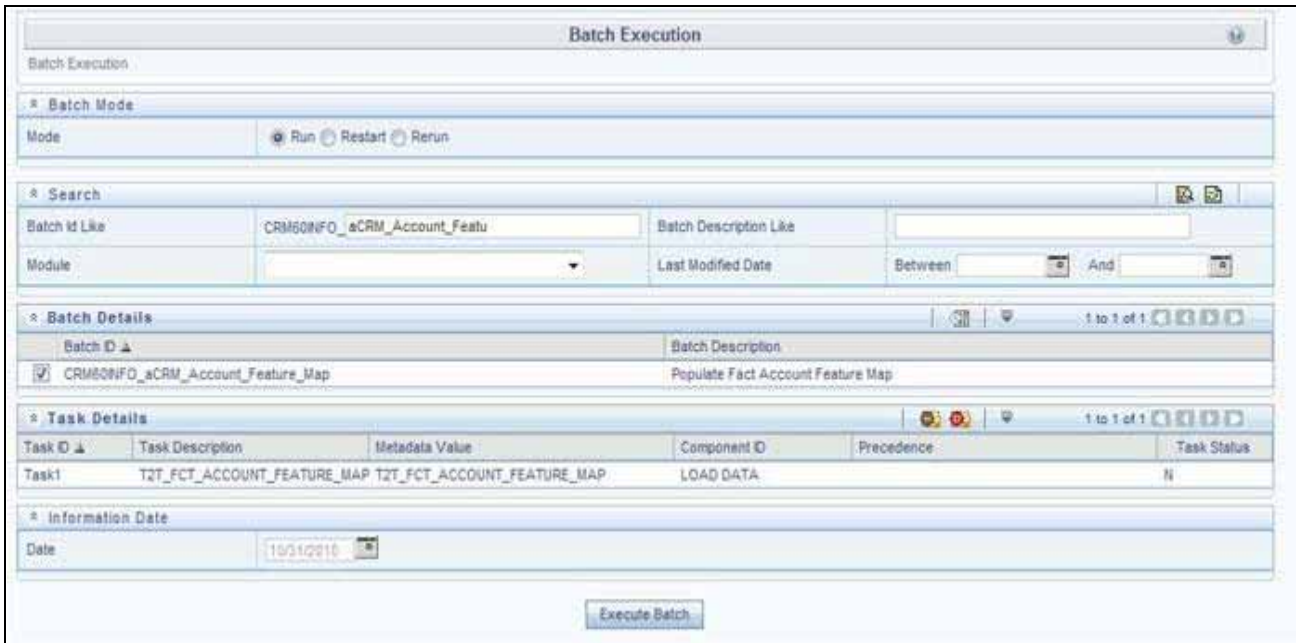


Figure 33. Execute Fact Account Feature Map Population

Alternatively, following steps will help you create a new batch:

1. From the **Home** menu, click **Operations** and select **Batch Maintenance**.
2. Click **New Batch** ('+' symbol in Batch Name container). Enter the **Batch Name** and **Description**.
3. Click **Save**.
4. Click the check box in the **Batch Name** container to select the **Batch**, you created in the earlier step.
5. Enter the **Task ID** and **Description**.
6. Select **Load Data** from the Components list.
7. Select the following from the Dynamic Parameters List and click **Save**.
 - **Datastore Type** - Select the appropriate datastore from the list.
 - **Datastore Name** - Select the appropriate name from the list.
 - **IP address** - Select the IP address from the list.
 - **Load Mode** - Select **Table to Table** from the list.
 - **Source Name** - Select <T2T Source Name> from the list.
 - **File Name** - Select the T2T name "T2T_FCT_ACCOUNT_FEATURE_MAP" you want to process.
8. Data file name will be blank for any Table to Table Load mode.

Default value refers to any parameter that has to be passed to T2T. This should be blank.
9. Execute the batch created in the preceding steps.

For more information, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Checking the Execution Status

The status of execution can be monitored using the Batch Monitor screen.

The status messages in Batch Monitor are:

- N - Not Started
- O - On Going
- F - Failure
- S - Success

The execution log can be accessed on the application server in the following directory:

`$FIC_DB_HOME/log/t2t.`

The file name will have the batch execution id.

This table can be queried for errors: `FCT_ACCOUNT_FEATURE_MAPS`

Note: For more information on configuration and execution of a batch, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Fact Customer to Customer Relationship

Fact Customer to Customer Relationship entity stores the relationship between the customers.

Following table lists the seeded T2T Definitions with related Source Table and Destination tables:

Table 24. Fact Customer to Customer Relationship definitions

T2T Definition Name	Source Staging Table	Destination Table
T2T_CUST_CUST_RELATION	STG_CUST_CUST_RELATIONSHIP	FCT_ACCOUNT_FEATURE_MAP

For more information, see Customer Insight Erwin Data Model to view the detailed structure of the tables.

Prerequisites

Following are the lists of tables used in the population of Fact Customer to Customer Relationship and these tables are required to be loaded prior to running the T2T:

- DIM_DATES
- DIM_CUSTOMER
- STG_CUST_CUST_RELATIONSHIP

For details on populating dimension tables like DIM_CUSTOMER, DIM_BANDS, and so on, refer to Chapter 3, "Dimension Loading Process,".

For details on populating DIM_DATES dimension table, refer to Chapter 4, "Time Dimension Population,".

For identifying fields required in Channel Transaction tables in staging for the purpose of Customer Insight Application(s), refer to *Download Specification*.

Executing the Fact Customer to Customer Relationship Population T2T

To execute the T2T component from OFSAA Infrastructure ICC framework (accessed through the application Batch Operations screen).

A seeded batch, <Infodom>_aCRM_Customer_Customer_Reltn - Task1 has to be executed for the required MIS Date.

The screenshot displays the 'Batch Execution' interface. It includes sections for 'Batch Mode' (Run, Restart, Rerun), 'Search' (Batch Id Like, Batch Description Like, Module, Last Modified Date), 'Batch Details' (Batch ID, Batch Description), 'Task Details' (Task ID, Task Description, Metadata Value, Component ID, Precedence, Task Status), and 'Information Date' (Date). The 'Batch Details' section shows a selected batch with ID 'CRM60INFO_aCRM_Customer_Customer_Reltn' and description 'Populate Customer to Customer Relation'. The 'Task Details' section shows a task with ID 'Task1', description 'T2T_CUST_CUST_RELATION', metadata value 'T2T_CUST_CUST_RELATION', component ID 'LOAD DATA', and task status 'N'. The 'Information Date' section shows a date of '10/31/2010'. An 'Execute Batch' button is visible at the bottom.

Figure 34. Execute Fact Customer to Customer Relationship Population

Alternatively, following steps will help you create a new batch:

1. From the **Home** menu, click **Operations** and select **Batch Maintenance**.
2. Click **New Batch** ('+' symbol in Batch Name container). Enter the **Batch Name** and **Description**.
3. Click **Save**.
4. Click the check box in the **Batch Name** container to select the **Batch**, you created in the earlier step.
5. Enter the **Task ID** and **Description**.
6. Select **Load Data** from the Components list.
7. Select the following from the Dynamic Parameters List and click **Save**.
 - **Datastore Type** - Select the appropriate datastore from the list.
 - **Datastore Name** - Select the appropriate name from the list.
 - **IP address** - Select the IP address from the list.
 - **Load Mode** - Select **Table to Table** from the list.
 - **Source Name** - Select <T2T Source Name> from the list.

- **File Name** - Select the T2T name "T2T_CUST_CUST_RELATION" you want to process.

8. Data file name will be blank for any Table to Table Load mode.

Default value refers to any parameter that has to be passed to T2T. This should be blank.

9. Execute the batch created in the preceding steps.

For more information, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Checking the Execution Status

The status of execution can be monitored using the Batch Monitor screen.

The status messages in Batch Monitor are:

- N - Not Started
- O - On Going
- F - Failure
- S - Success

The execution log can be accessed on the application server in the following directory: `$FIC_DB_HOME/log/t2t.`

The file name will have the batch execution Id.

This table can be queried for errors: `FCT_CUST_CUST_RELATIONSHIPS`

Note: For more information on configuration and execution of a batch, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Fact Opportunity

Fact Opportunity entity stores fact data of an opportunity in an opportunity life cycle. It stores information like cost, current stage of opportunity, current status of opportunity, expected revenue, probability of win, and so on.

The following table lists the seeded T2T Definitions with related Source Table and Destination tables:

Table 25. Fact Opportunity definitions

T2T Definition Name	Source Staging Table	Destination Table
T2T_STG_OPPORTUNITY	STG_OPPORTUNITY	FCT_OPPORTUNITY

Prerequisites

Following are the lists of tables used in the population of Fact Customer to Customer Relationship and these tables are required to be loaded prior to running the T2T.

- DIM_DATES
- DIM_OPPORTUNITY
- DIM_PRODUCT

- DIM_GEOGRAPHY
- DIM_PROSPECT
- DIM_CUSTOMER
- DIM_SALES_REPRESENTATIVE
- DIM_OPTY_WL_REASON
- DIM_SALES_STAGE
- DIM_OFFER
- DIM_LOB
- STG_OPPORTUNITY

For details on populating dimension tables like DIM_CUSTOMER, DIM_BANDS, and so on, refer to Chapter 3, "Dimension Loading Process,".

For details on populating DIM_DATES dimension table, refer to Chapter 4, "Time Dimension Population,".

For identifying fields required in Channel Transaction tables in staging for the purpose of Customer Insight Application(s), refer to *Download Specification*.

Executing the Fact Opportunity Population T2T

To execute the T2T component from OFSAA Infrastructure ICC framework (accessed through the application Batch Operations screen).

A seeded batch, <Infodom>_aCRM_Institutional_Analysis – Task1 has to be executed for the required MIS Date.

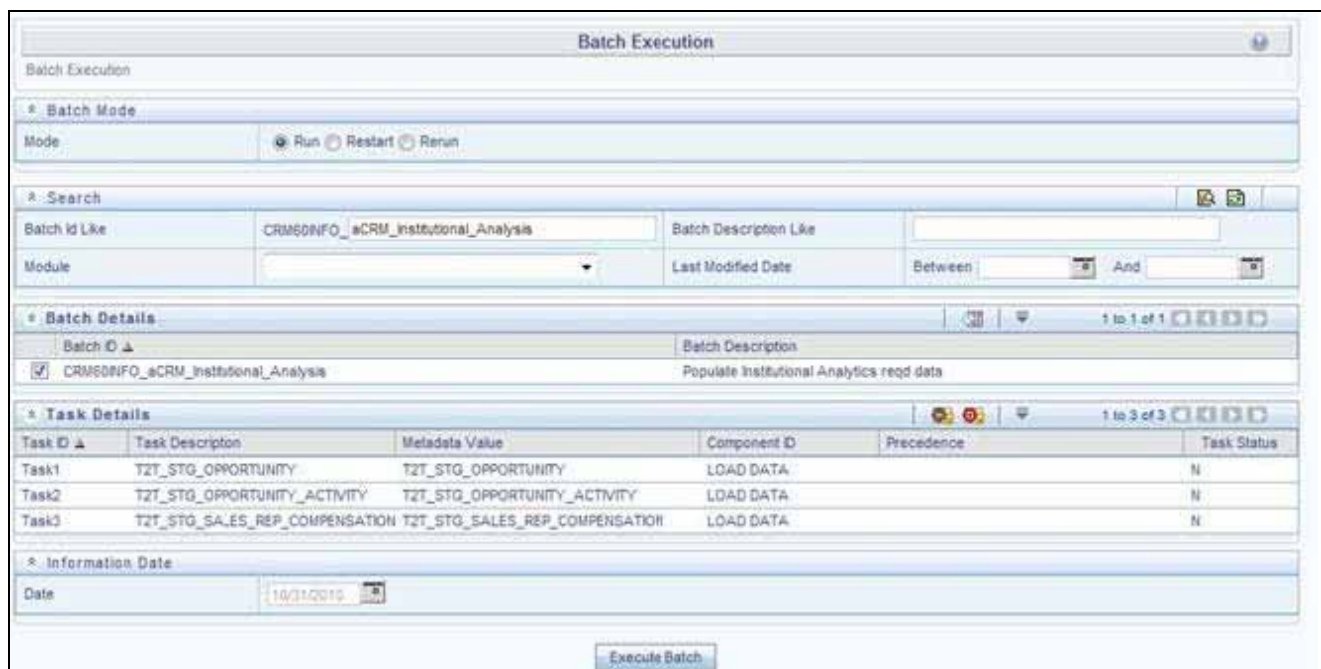


Figure 35. Execute Fact Opportunity Population

Alternatively, following steps will help you create a new batch:

1. From the **Home** menu, click **Operations** and select **Batch Maintenance**.
2. Click **New Batch** ('+' symbol in Batch Name container). Enter the **Batch Name** and **Description**.
3. Click **Save**.
4. Click the check box in the **Batch Name** container to select the **Batch**, you created in the earlier step.
5. Enter the **Task ID** and **Description**.
6. Select **Load Data** from the Components list.
7. Select the following from the Dynamic Parameters List and click **Save**.
 - **Datastore Type** - Select the appropriate datastore from the list.
 - **Datastore Name** - Select the appropriate name from the list.
 - **IP address** - Select the IP address from the list.
 - **Load Mode** - Select **Table to Table** from the list.
 - **Source Name** - Select <T2T Source Name> from the list.
 - **File Name** - Select the T2T name "T2T_STG_OPPORTUNITY" you want to process.
8. Data file name will be blank for any Table to Table Load mode.

Default value refers to any parameter that has to be passed to T2T. If there is any need for currency conversion in T2T transactions, Default value has to be provided.

For example, default value is [DRCY]='USD'

Here, 'USD' acts as reporting currency parameter to T2T

9. Execute the batch created in the preceding steps.

For more information, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Checking the Execution Status

The status of execution can be monitored using the Batch Monitor screen.

The status messages in Batch Monitor are:

- N - Not Started
- O - On Going
- F - Failure
- S - Success

The execution log can be accessed on the application server in the following directory:

`$FIC_DB_HOME/log/t2t.`

The file name will have the batch execution Id.

This table can be queried for errors: FCT_OPPORTUNITY\$

Note: For more information on configuration and execution of a batch, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Fact Opportunity Activity

Fact Opportunity Activity entity stores the fact data related to activities that are performed for each opportunity. It stores information like start & end dates, priority and severity of activity, cost of activity, and so on.

The following table lists the seeded T2T Definitions with related Source Table and Destination tables:

Table 26. Fact Opportunity Activity definitions

T2T Definition Name	Source Staging Table	Destination Table
T2T_STG_OPPORTUNITY_ACTIVITY	STG_OPPORTUNITY_ACTIVITY	FCT_OPPORTUNITY_ACTIVITY

To view the detailed structure of this table, refer to *Erwin Data Model*.

Prerequisites

Following are the lists of tables used in the population of Fact Opportunity Activity and these tables are required to be loaded prior to running the T2T.

- DIM_DATES
- DIM_OPPORTUNITY
- DIM_ACTIVITY_TYPE
- DIM_PRODUCT
- DIM_SALES_REPRESENTATIVE
- DIM_SALES_STAGE
- STG_OPPORTUNITY_ACTIVITY

For details on populating dimension tables like DIM_CUSTOMER, DIM_BANDS, and so on, refer to Chapter 3, "Dimension Loading Process,".

For details on populating DIM_DATES dimension table, refer to Chapter 4, "Time Dimension Population,".

For identifying fields required in Channel Transaction tables in staging for the purpose of Customer Insight Application(s), refer to *Download Specification*.

Executing the Fact Opportunity Activity Population T2T

To execute the T2T component from OFSAA Infrastructure ICC framework (accessed through the application Batch Operations screen).

A seeded batch, <Infodom>_aCRM_Institutional_Analysis – Task2 has to be executed for the required MIS Date.

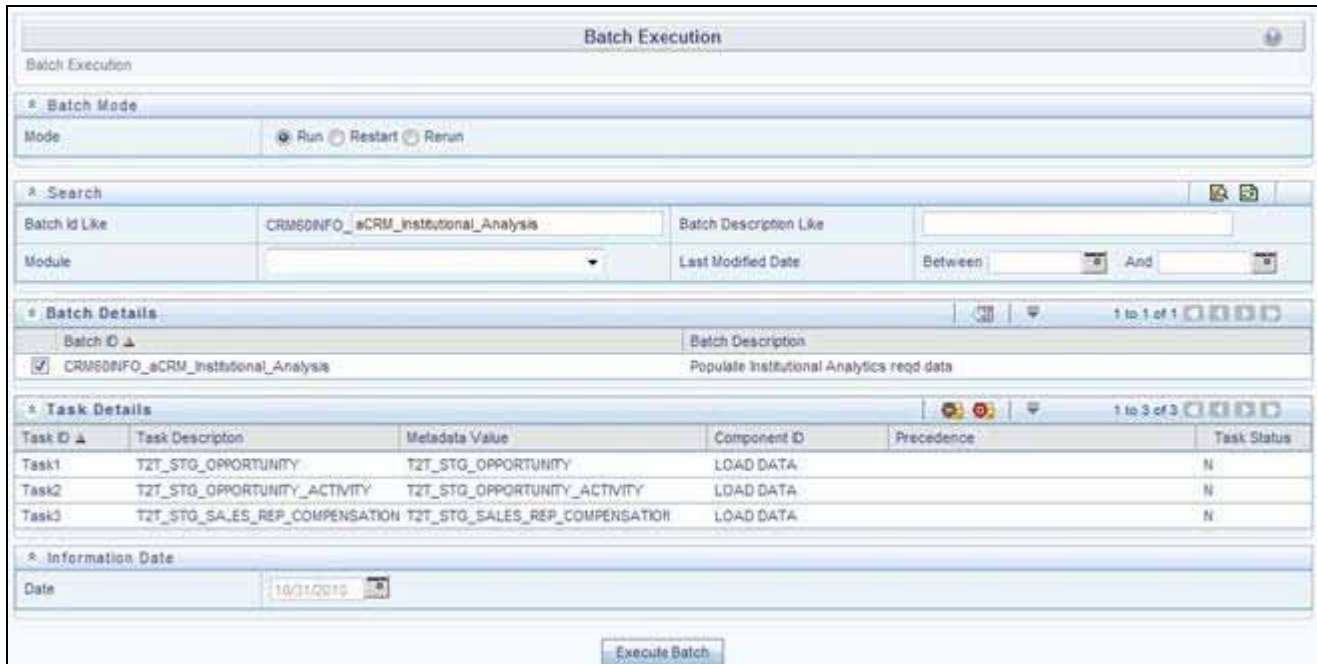


Figure 36. Execute Fact Opportunity Activity Population

Alternatively, following steps will help you create a new batch:

1. From the **Home** menu, click **Operations** and select **Batch Maintenance**.
2. Click **New Batch** (+ symbol in Batch Name container). Enter the **Batch Name** and **Description**.
3. Click **Save**.
4. Click the check box in the **Batch Name** container to select the **Batch**, you created in the earlier step.
5. Enter the **Task ID** and **Description**.
6. Select **Load Data** from the Components list.
7. Select the following from the Dynamic Parameters List and click **Save**.
 - **Datastore Type** - Select the appropriate datastore from the list.
 - **Datastore Name** - Select the appropriate name from the list.
 - **IP address** - Select the IP address from the list.
 - **Load Mode** - Select **Table to Table** from the list.
 - **Source Name** - Select <**T2T Source Name**> from the list.
 - **File Name** - Select the T2T name 'T2T_STG_OPPORTUNITY_ACTIVITY' you want to process.
8. Data file name will be blank for any Table to Table Load mode.

Default value refers to any parameter that has to be passed to T2T. If there is any need for currency conversion in T2T transactions, Default value has to be provided.

For example, default value is [DRCY]='USD'

Here, 'USD' acts as reporting currency parameter to T2T

9. Execute the batch created in the preceding steps.

For more information, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Checking the Execution Status

The status of execution can be monitored using the Batch Monitor screen.

The status messages in Batch Monitor are:

- N - Not Started
- O - On Going
- F - Failure
- S - Success

The execution log can be accessed on the application server in the following directory: \$FIC_DB_HOME/log/t2t.

The file name will have the batch execution Id.

The following tables can be queried for errors: FCT_OPPORTUNITY_ACTIVITY\$

Note: For more information on configuration and execution of a batch, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Fact Sales Representative Compensation

Fact Sales Representative Compensation entity stores the sales incentive compensation paid for a sales representative against a product.

The following table lists the seeded T2T Definitions with related Source Table and Destination tables:

Table 27. Fact Sales Representative Compensation

T2T Definition Name	Source Staging Table	Destination Table
T2T_STG_SALES_REP_COMPENSATION	STG_SALES_REP_COMPENSATION	FCT_SALES_REP_COMPENSATION

For more information, see Customer Insight Erwin Data Model to view the detailed structure of the earlier tables.

Prerequisites

Following are the lists of tables used in the population of Fact Sales Representative Compensation and these tables are required to be loaded prior to running the T2T.

- DIM_DATES
- DIM_PRODUCT
- DIM_SALES_REPRESENTATIVE
- STG_SALES_REP_COMPENSATION

For details on populating dimension tables like DIM_CUSTOMER, DIM_BANDS, and so on, see Dimension Tables Population.

For details on populating DIM_DATES dimension table, see Chapter 4, *Time Dimension Population*.

For identifying fields required in Channel Transaction tables in staging for the purpose of Customer Insight Application(s), refer to *Download Specification*.

Executing the Fact Sales Representative Compensation Population T2T

To execute the T2T component from OFSAA Infrastructure ICC framework (accessed through the application Batch Operations screen).

A seeded batch, <Infodom>_aCRM_Institutional_Analysis – Task3 has to be executed for the required MIS Date.

The screenshot shows the 'Batch Execution' interface. It includes a 'Batch Mode' section with radio buttons for 'Run', 'Restart', and 'Rerun'. A search section contains fields for 'Batch Id Like' (CRM60NFO_aCRM_Institutional_Analysis), 'Batch Description Like', 'Module', and 'Last Modified Date'. Below this is the 'Batch Details' section with a table showing one batch: CRM60NFO_aCRM_Institutional_Analysis with description 'Populate Institutional Analytics reqd data'. The 'Task Details' section contains a table with three tasks:

Task ID	Task Description	Metadata Value	Component ID	Precedence	Task Status
Task1	T2T_STG_OPPORTUNITY	T2T_STG_OPPORTUNITY	LOAD DATA		N
Task2	T2T_STG_OPPORTUNITY_ACTIVITY	T2T_STG_OPPORTUNITY_ACTIVITY	LOAD DATA		N
Task3	T2T_STG_SALES_REP_COMPENSATION	T2T_STG_SALES_REP_COMPENSATION	LOAD DATA		N

An 'Information Date' section has a 'Date' field set to 10/31/2010. An 'Execute Batch' button is at the bottom.

Figure 37. Execute Fact Sales Representative Compensation Population

Alternatively, following steps will help you create a new batch:

1. From the **Home** menu, click **Operations** and select **Batch Maintenance**.
2. Click **New Batch** ('+' symbol in Batch Name container). Enter the **Batch Name** and **Description**.
3. Click **Save**.
4. Click the check box in the **Batch Name** container to select the **Batch**, you created in the earlier step.
5. Enter the **Task ID** and **Description**.
6. Select **Load Data** from the Components list.
7. Select the following from the Dynamic Parameters List and click **Save**.
 - **Datastore Type** - Select the appropriate datastore from the list.
 - **Datastore Name** - Select the appropriate name from the list. **IP address** - Select the IP address from the list.

- **Load Mode** - Select **Table to Table** from the list.
- **Source Name** - Select <**T2T Source Name**> from the list.
- **File Name** - Select the T2T name 'T2T_STG_SALES_REP_COMPENSATION', you want to process.

8. Data file name will be blank for any Table to Table Load mode.

Default value refers to any parameter that has to be passed to T2T. If there is any need for currency conversion in T2T transactions, Default value has to be provided.

For example, default value is [DRCY]='USD' Here, 'USD' acts as reporting currency parameter to T2T

9. Execute the batch created in the preceding steps.

For more information, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Checking the Execution Status

The status of execution can be monitored using the Batch Monitor screen.

The status messages in Batch Monitor are :

- N - Not Started
- O - On Going
- F - Failure
- S - Success

The execution log can be accessed on the application server in the following directory: \$FIC_DB_HOME/log/t2t.

The file name will have the batch execution id.

The following tables can be queried for errors: FCT_SALES_REP_COMPENSATIONS

Note: For more information on configuration and execution of a batch, see Oracle Financial Services Analytical Applications Infrastructure User Guide.

Fact Application

Fact Application entity stores the fact data of applications like application details, current stage, status, rejection reason, time-taken in each stage, and so on.

The following table lists the seeded T2T Definitions with related Source Table and Destination tables:

Table 28. Fact Application definitions

T2T Definition Name	Source Staging Table	Destination Table
T2T_FCT_APPLICATION	STG_APPLICATION	FCT_APPLICATION

For more information and to view the detailed structure of the earlier tables, see *Customer Insight Erwin Data Model*.

Prerequisites

Following are the lists of tables used in the population of Fact Application. These tables are required to be loaded prior to running the T2T:

- DIM_DATES
- DIM_APPLICATION_TYPE
- DIM_PRODUCT
- DIM_CREDIT_OFFICER
- DIM_CUSTOMER
- DIM_CHANNEL
- DIM_CREDIT_CENTER
- DIM_DECISION_STATUS
- DIM_GEOGRAPHY
- DIM_INDUSTRY
- DIM_APPLICATION_REJECT_REASONS
- DIM_DEVIATION_REASONS
- DIM_SALES_REPRESENTATIVE
- DIM_ACCOUNT
- DIM_PROSPECT
- DIM_BANDS
- STG_APPLICATION

For details on populating dimension tables like DIM_CUSTOMER, DIM_BANDS, and so on, see Dimension Tables Population.

For details on populating DIM_DATES dimension table, see Chapter 4, "Time Dimension Population,".

For identifying fields required in Channel Transaction tables in staging for the purpose of Customer Insight Application(s), refer to *Download Specification*.

Executing the Fact Application Population T2T

To execute the T2T component from OFSAA Infrastructure ICC framework (accessed through *Operations* module), a seeded batch, <Infodom>_aCRM_CommCust_Appln – Task1 has to be executed for the required MIS Date.

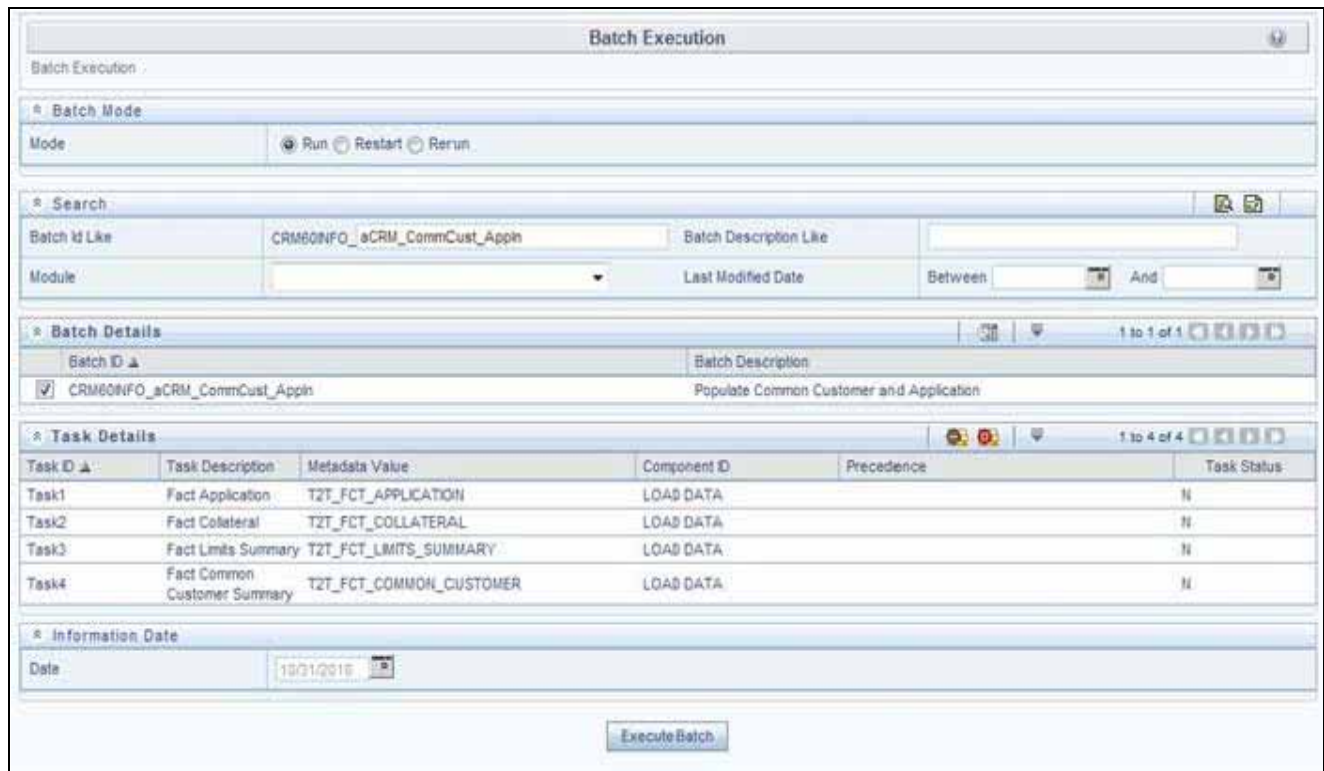


Figure 38. Execute Fact Application Population

Alternatively, following steps will help you create a new batch:

1. From the **Home** menu, click **Operations** and select **Batch Maintenance**.
2. Click **New Batch** ('+' symbol in Batch Name container). Enter the **Batch Name** and **Description**.
3. Click **Save**.
4. Click the check box in the **Batch Name** container to select the **Batch**, you created in the earlier step.
5. Enter the **Task ID** and **Description**.
6. Select **Load Data** from the Components list.
7. Select the following from the Dynamic Parameters List and click **Save**.
 - **Datastore Type** - Select the appropriate datastore from the list.
 - **Datastore Name** - Select the appropriate name from the list.
 - **IP address** - Select the IP address from the list.
 - **Load Mode** - Select **Table to Table** from the list.
 - **Source Name** - Select <T2T Source Name> from the list.
 - **File Name** - Select the T2T name 'T2T_FCT_APPLICATION', you want to process.
8. Data file name will be blank for any Table to Table Load mode.

Default value refers to any parameter that has to be passed to T2T. If there is any need for currency conversion in T2T transactions, Default value has to be provided.

For example, default value is [DRCY]='USD'

Here, 'USD' acts as reporting currency parameter to T2T.

9. Execute the batch created in the preceding steps.

For more information, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Checking the Execution Status

The status of execution can be monitored using the Batch Monitor screen.

The status messages in Batch Monitor are :

- N - Not Started
- O - On Going
- F - Failure
- S - Success

The execution log can be accessed on the application server in the following directory: \$FIC_DB_HOME/log/t2t.

The file name will have the batch execution id.

The following tables can be queried for errors: FCT_APPLICATIONS

Note: For more information on configuration and execution of a batch, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Account Manager Relation

The following table lists the seeded T2T Definitions with related Source Table and Destination tables:

Table 29. Account Manager definitions

T2T Definition Name	Source Staging Table	Destination Table
T2T_ACCOUNT_MANAGERS_REL	STG_ACCOUNT_MGR_REL	FCT_ACCOUNT_MGR_REL

Note: For more information and to view the detailed structure of the earlier tables, see Customer Insight Erwin Data Model.

Prerequisites

The following are the lists of tables used in the population of Account Manager Relation. These tables are required to be loaded prior to running the T2T.

- Dim_account
- Dim_customer
- Dim_dates
- Dim_management
- Stg_account_mgr_rel

Executing the Account Manager Relation T2T

To execute the T2T component from OFSAA Infrastructure ICC framework (accessed through Operations module), a seeded batch, <Infodom>_ACCOUNT_MANAGER_REL has to be executed for the required MIS Date.

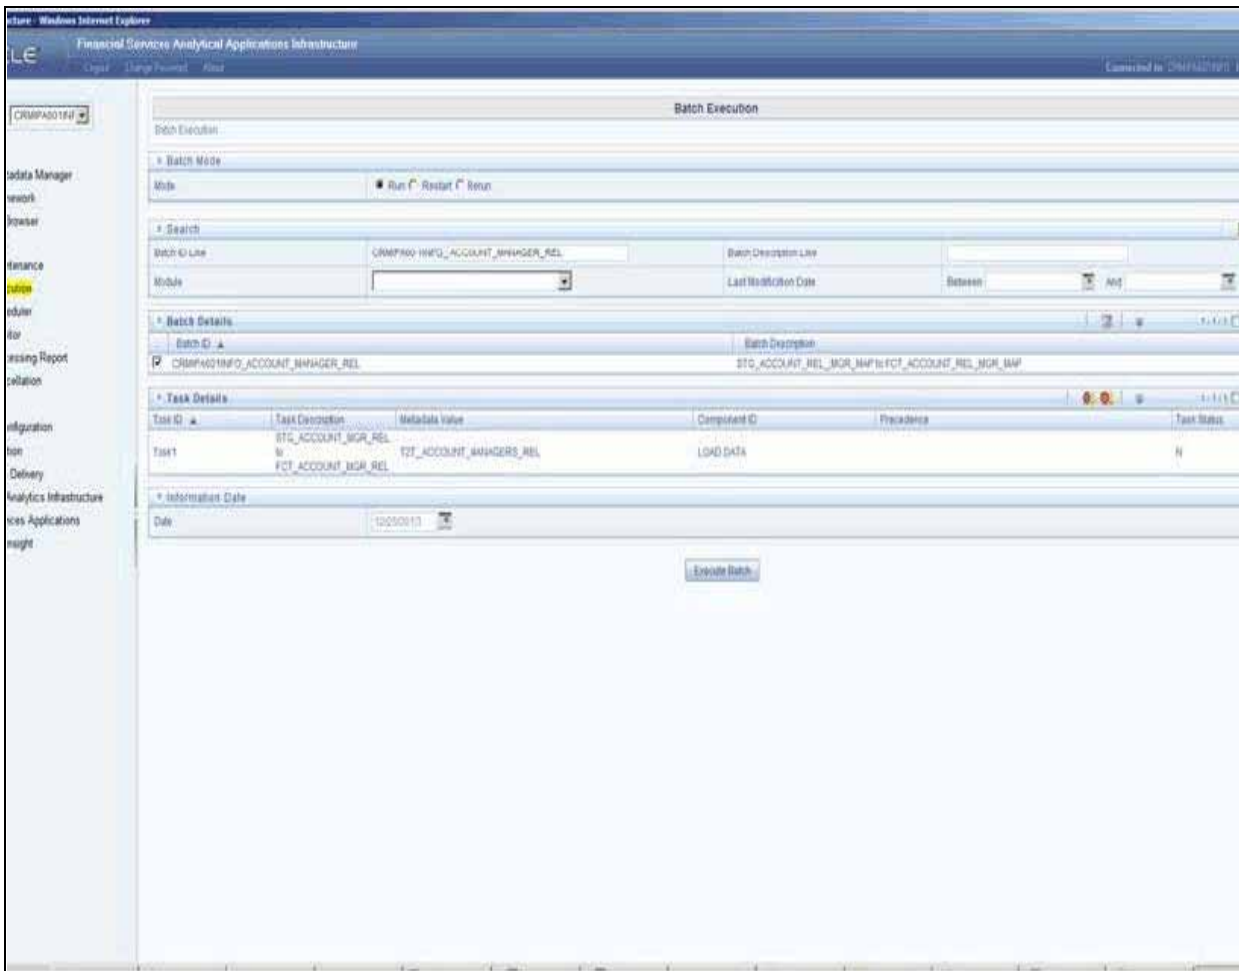


Figure 39. Execute Account Manager Relation

Alternatively, following steps will help you create a new batch:

1. From the **Home** menu, click **Operations** and select **Batch Maintenance**.
2. Click **New Batch** ('+' symbol in Batch Name container). Enter the **Batch Name** and **Description**.
3. Click **Save**.
4. Click the check box in the **Batch Name** container to select the **Batch**, you created in the earlier step.
5. Enter the **Task ID** and **Description**.
6. Select **Load Data** from the Components list.
7. Select the following from the Dynamic Parameters List and click **Save**.

- **Datastore Type** - Select the appropriate datastore from the list.
- **Datastore Name** - Select the appropriate name from the list.
- **IP address** - Select the IP address from the list.
- **Load Mode** - Select **Table to Table** from the list.
- **Source Name** - Select <**T2T Source Name**> from the list.
- **File Name** - Select the T2T name 'T2T_ACCOUNT MANAGERS_REL', you want to process.

8. Data file name will be blank for any Table to Table Load mode.

Default value refers to any parameter that has to be passed to T2T. If there is any need for currency conversion in T2T transactions, Default value has to be provided.

For example, default value is [DRCY] = 'USD'.

Here, 'USD' acts as reporting currency parameter to T2T.

9. Execute the batch created in the preceding steps.

For more information, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Checking the Execution Status

The status of execution can be monitored using the Batch Monitor screen.

The status messages in Batch Monitor are:

- N - Not Started
- O - On Going
- F - Failure
- S - Success

The execution log can be accessed on the application server in the following directory: \$FIC_DB_HOME/log/t2t.

The file name will have the batch execution Id.

Note: For more information on configuration and execution of a batch, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Management Forecast

The following table lists the seeded T2T Definitions with related Source Table and Destination tables:

Table 30. Management Forecast definitions

T2T Definition Name	Source Staging Table	Destination Table
T2T_MANAGEMENT_FCAST	STG_MGMT_FORECAST	FCT_MGMT_FORECAST

Note: For more information and to view the detailed structure of the earlier tables, see Customer Insight Erwin Data Model.

Prerequisites

The following are the lists of tables used in the population of Account Manager Relation. These tables are required to be loaded prior to running the T2T.

- DIM_ORG_STRUCTURE
- DIM_DATES
- DIM_CUSTOMER
- DIM_LOB
- DIM_PRODUCT
- DIM_ORG_UNIT
- DIM_ACCOUNT
- STG_MGMT_FORECAST

Executing the Management Forecast T2T

To execute the T2T component from OFSAA Infrastructure ICC framework (accessed through Operations module), a seeded batch, <Infodom>_MANAGEMENT_FCAST has to be executed for the required MIS Date.

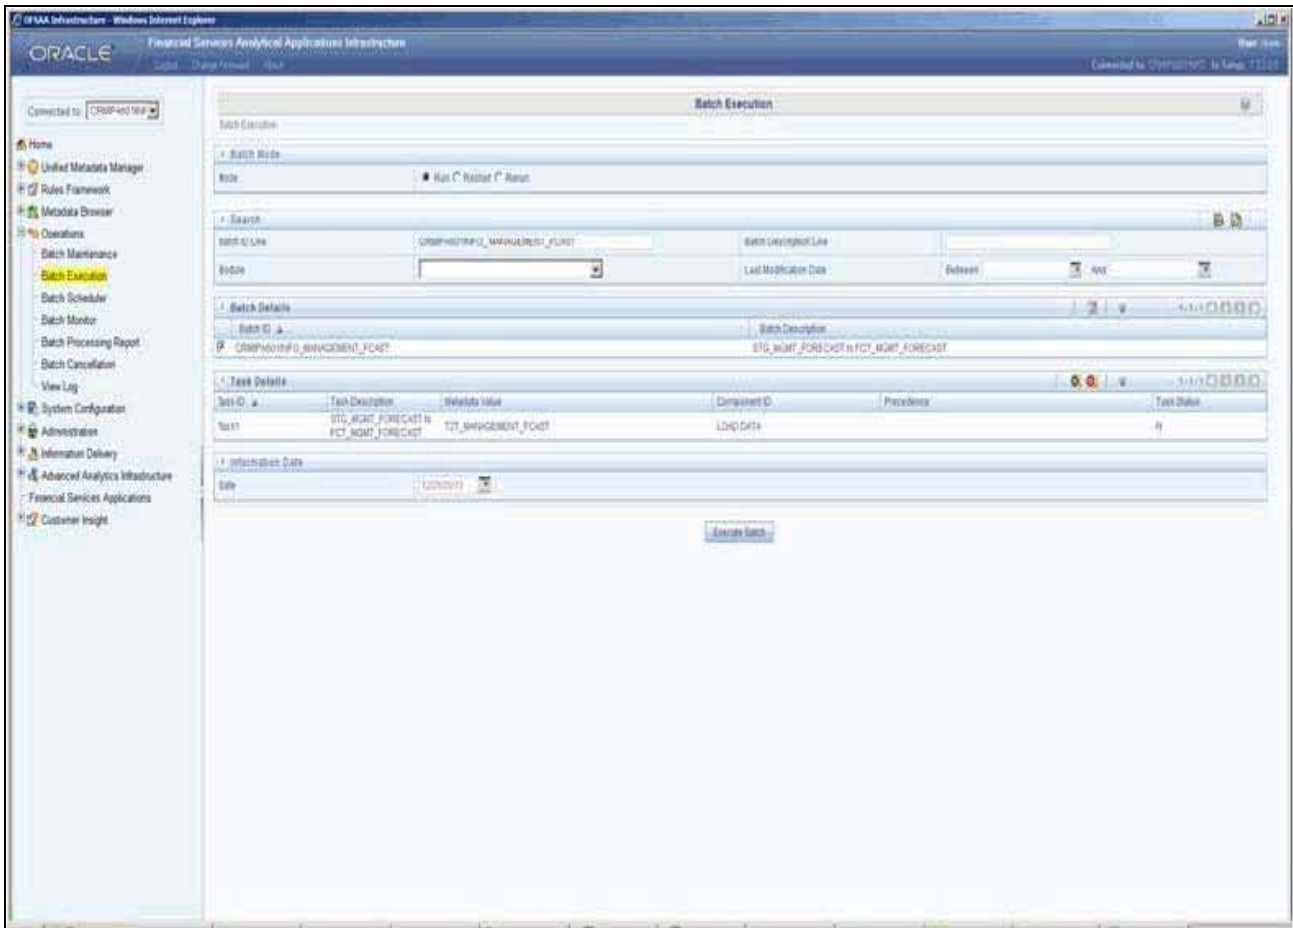


Figure 40. Execute Management Forecast

Alternatively, following steps will help you create a new batch:

1. From the **Home** menu, click **Operations** and select **Batch Maintenance**.
2. Click **New Batch** ('+' symbol in Batch Name container). Enter the **Batch Name** and **Description**.
3. Click **Save**.
4. Click the check box in the **Batch Name** container to select the **Batch**, you created in the earlier step.
5. Enter the **Task ID** and **Description**.
6. Select **Load Data** from the Components list.
7. Select the following from the Dynamic Parameters List and click **Save**.
8. Select the following from the Dynamic Parameters List and click **Save**.
 - **Datastore Type** - Select the appropriate datastore from the list.
 - **Datastore Name** - Select the appropriate name from the list.
 - **IP address** - Select the IP address from the list.
 - **Load Mode** - Select **Table to Table** from the list.

- **Source Name** - Select <T2T Source Name> from the list.
- **File Name** - Select the T2T name 'T2T_MANAGEMENT_FCAST', you want to process.

9. Data file name will be blank for any Table to Table Load mode.

Default value refers to any parameter that has to be passed to T2T. If there is any need for currency conversion in T2T transactions, Default value has to be provided.

For example, default value is [DRCY] = 'USD'.

Here, 'USD' acts as reporting currency parameter to T2T.

10. Execute the batch created in the preceding steps.

For more information, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Checking the Execution Status

The status of execution can be monitored using the Batch Monitor screen.

The status messages in Batch Monitor are:

- N - Not Started
- O - On Going
- F - Failure
- S - Success

The execution log can be accessed on the application server in the following directory: `$FIC_DB_HOME/log/t2t.`

The file name will have the batch execution Id.

Note: For more information on configuration and execution of a batch, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Fact Account Customer Relation

The following table lists the seeded T2T Definitions with related Source Table and Destination tables:

Table 31. Fact Account Customer Relation definitions

T2T Definition Name	Source Staging Table	Destination Table
T2T_ACCT_CUST_RELATIONSHIP	STG_CUSTOMER_RELATIONSHIP	FCT_ACCT_CUST_RELATIONSHIP

Note: For more information and to view the detailed structure of the earlier tables, see Customer Insight Erwin Data Model.

Prerequisites

The following are the lists of tables used in the population of Account Manager Relation. These tables are required to be loaded prior to running the T2T.

- DIM_DATES

- DIM_CUSTOMER
- DIM_ACCOUNT
- DIM_GEOGRAPHY
- DIM_MANAGEMENT
- DIM_CHANNEL
- DIM_PRODUCT
- DIM_DATA_ORIGIN
- STG_CUSTOMER_RELATIONSHIP

Executing the Account Customer Relation T2T

To execute the T2T component from OFSAA Infrastructure ICC framework (accessed through Operations module), a seeded batch, <INFODOM>_ACCT_CUST_RELATIONSHIP has to be executed for the required MIS Date.

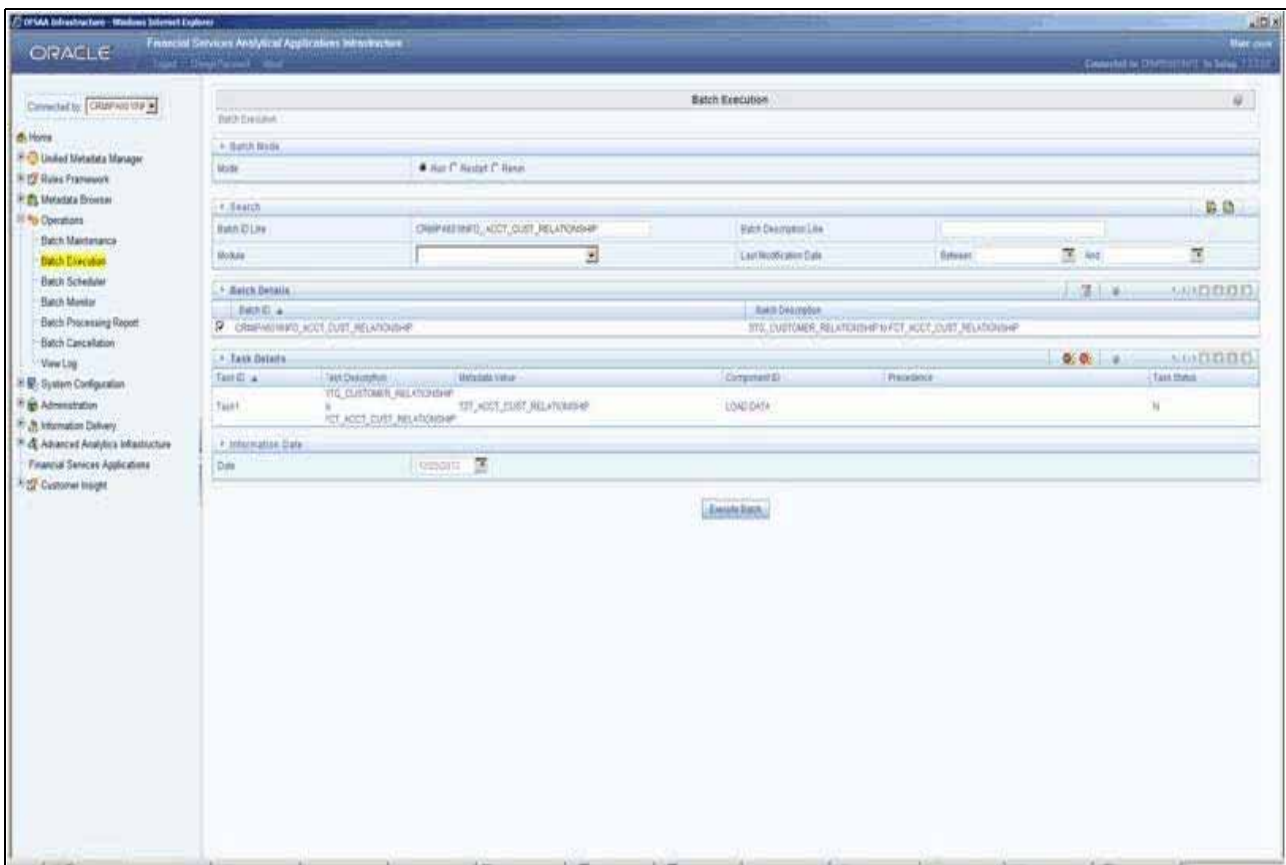


Figure 41. Execute Account Customer Relation

Alternatively, following steps will help you create a new batch:

1. From the **Home** menu, click **Operations** and select **Batch Maintenance**.

2. Click **New Batch** ('+' symbol in Batch Name container). Enter the **Batch Name** and **Description**.
3. Click **Save**.
4. Click the check box in the **Batch Name** container to select the **Batch**, you created in the earlier step.
5. Enter the **Task ID** and **Description**.
6. Select **Load Data** from the Components list.
7. Select the following from the Dynamic Parameters List and click **Save**.
 - **Datastore Type** - Select the appropriate datastore from the list.
 - **Datastore Name** - Select the appropriate name from the list.
 - **IP address** - Select the IP address from the list.
 - **Load Mode** - Select **Table to Table** from the list.
 - **Source Name** - Select <**T2T Source Name**> from the list.
 - **File Name** - Select the T2T name 'T2T_ACCT_CUST_MANAGERS_RELATIONSHIP', you want to process.

Data file name will be blank for any Table to Table Load mode.

Default value refers to any parameter that has to be passed to T2T. If there is any need for currency conversion in T2T transactions, Default value has to be provided.

For example, default value is [DRCY] = 'USD'.

Here, 'USD' acts as reporting currency parameter to T2T.

8. Execute the batch created in the preceding steps.

For more information, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Checking the Execution Status

The status of execution can be monitored using the Batch Monitor screen.

The status messages in Batch Monitor are:

- N - Not Started
- O - On Going
- F - Failure
- S - Success

The execution log can be accessed on the application server in the following directory: `$FIC_DB_HOME/log/t2t.`

The file name will have the batch execution Id.

Note: For more information on configuration and execution of a batch, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Fact Account Profitability

Fact Account Profitability entity stores fact data for reporting line items of revenue, costs, and expense related to each customer account. The data into this table is populated from other fact tables like FCT_COMMON_ACCOUNT_SUMMARY, FCT_PFT_ACCOUNT_SUMMARY, FCT_FTP_ACCOUNT_SUMMARY, FCT_REG_CAP_ACCOUNT_SUMMARY, and FCT_ECO_CAP_ACCOUNT_SUMMARY.

The following table lists the seeded Post Load Transformation Definition with related Source Table and Destination tables:

Table 32. Fact Account Profitability

DT Definition Name	Source Tables	Destination Table
FN_FCT_ACCOUNT_PFT	FCT_COMMON_ACCOUNT_SUMMARY	FCT_ACCOUNT_PROFITABILITY
	FCT_PFT_ACCOUNT_SUMMARY	
	FCT_FTP_ACCOUNT_SUMMARY	
	FCT_REG_CAP_ACCOUNT_SUMMARY	
	FCT_ECO_CAP_ACCOUNT_SUMMARY	
	FCT_PFT_CUSTOMER_SUMMARY	

Refer to *Oracle Financial Services Analytical Applications Data Model Data Dictionary* or the *Erwin Data Model* to view the detailed structure of the tables.

Information from account summary fact tables are populated to Fact Account Profitability through a mapping process. Reporting line dimension is mapped to measures present in account summary. A PL/SQL procedure then populates the fact by reading the mapping definition.

Reporting line dimension is created/maintained from Attribute Member Hierarchy Maintenance (AMHM) component of OFSAAI. A Reporting line item represents a revenue, costs, or expenses. Rollup signage is set as an attribute for a reporting line. To know more about AMHM, refer to *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

The Account summary tables contain the revenue, costs, or expenses measures pertaining to an Account. Map Maintenance component of OFSAAI is used to map the measures of account summary tables (represented in a measure hierarchy) to reporting line hierarchy. A pre-defined mapping "Reporting Line Mapping" is seeded along with the application installer. Reporting Line Hierarchy and Reporting Line Measure Hierarchy are the two hierarchies which are used for the mapping. Reporting Line Hierarchy is a parent child hierarchy which is based on Reporting Line Dimension entity.

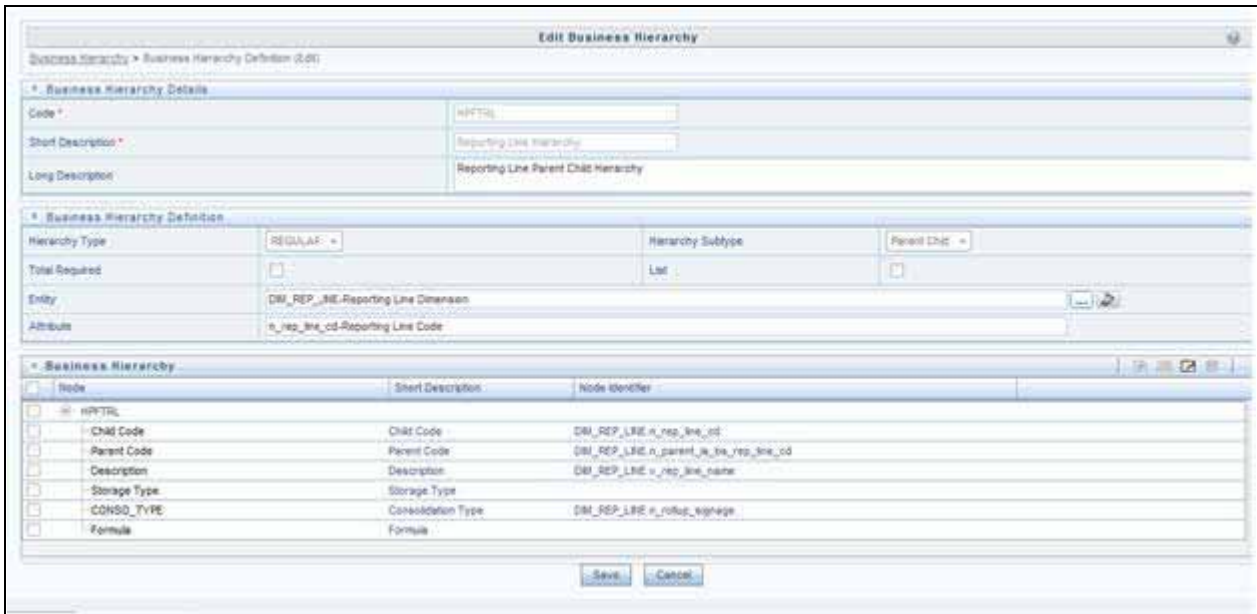


Figure 42. Reporting Line Hierarchy

Reporting Line Measure hierarchy is a Non Business Intelligence Enabled Hierarchy which is based on measures from the Account Summary tables.

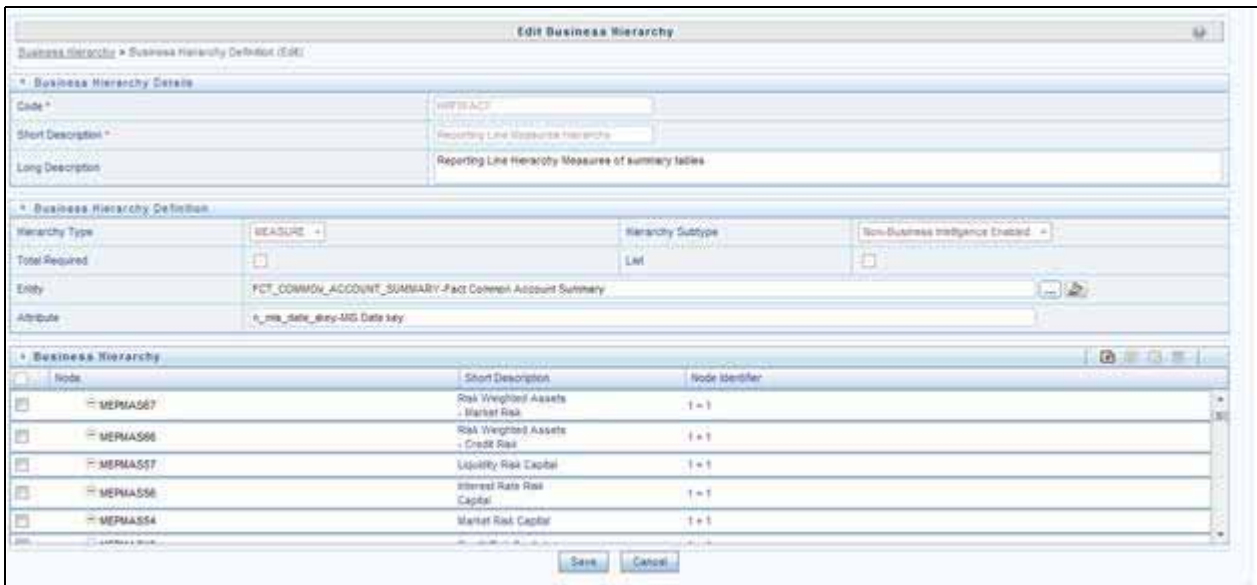


Figure 43. Reporting Line Hierarchy

A seeded map is configured between the Reporting Line Hierarchy and Reporting Line Measure Hierarchy from Map Maintenance of OFSAAI.

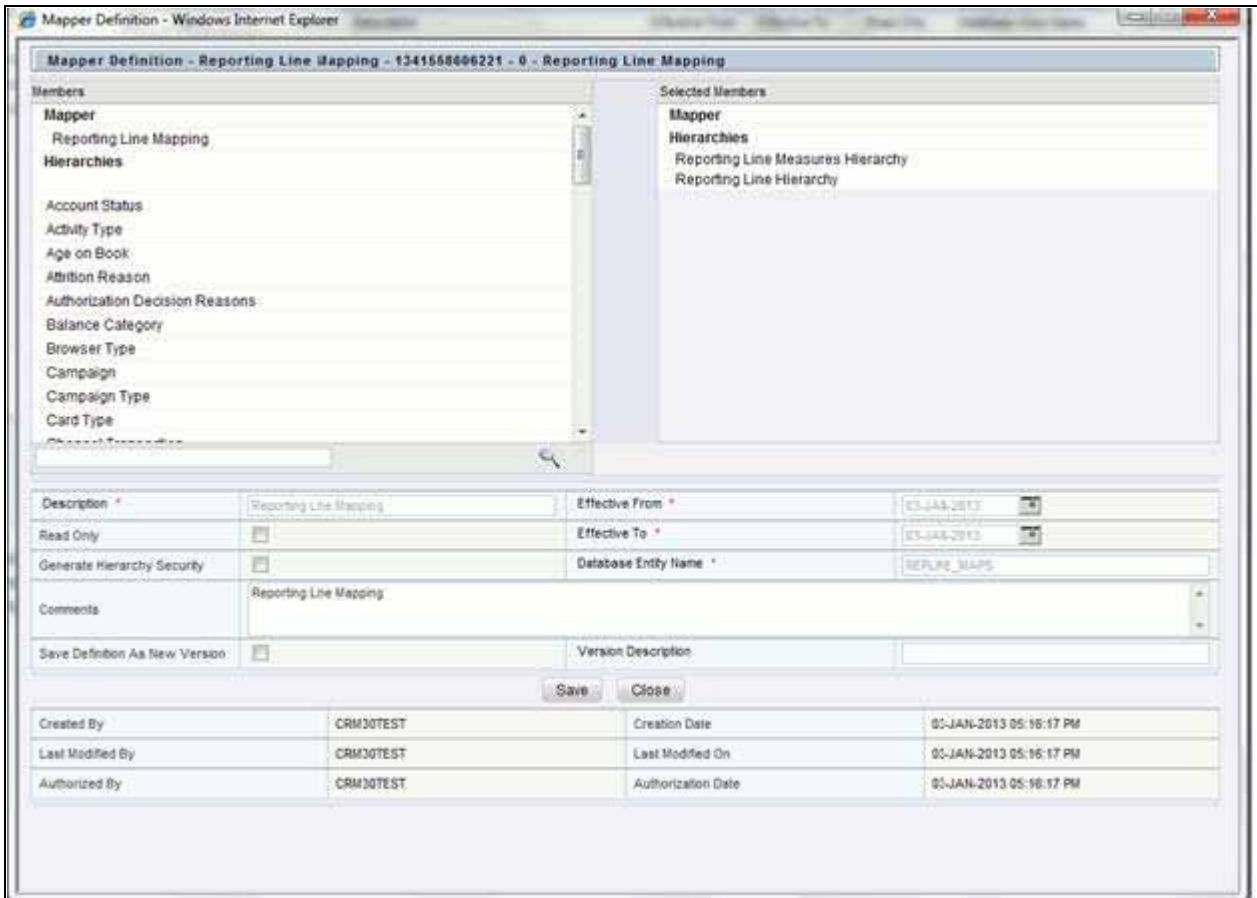


Figure 44. Mapper Definition

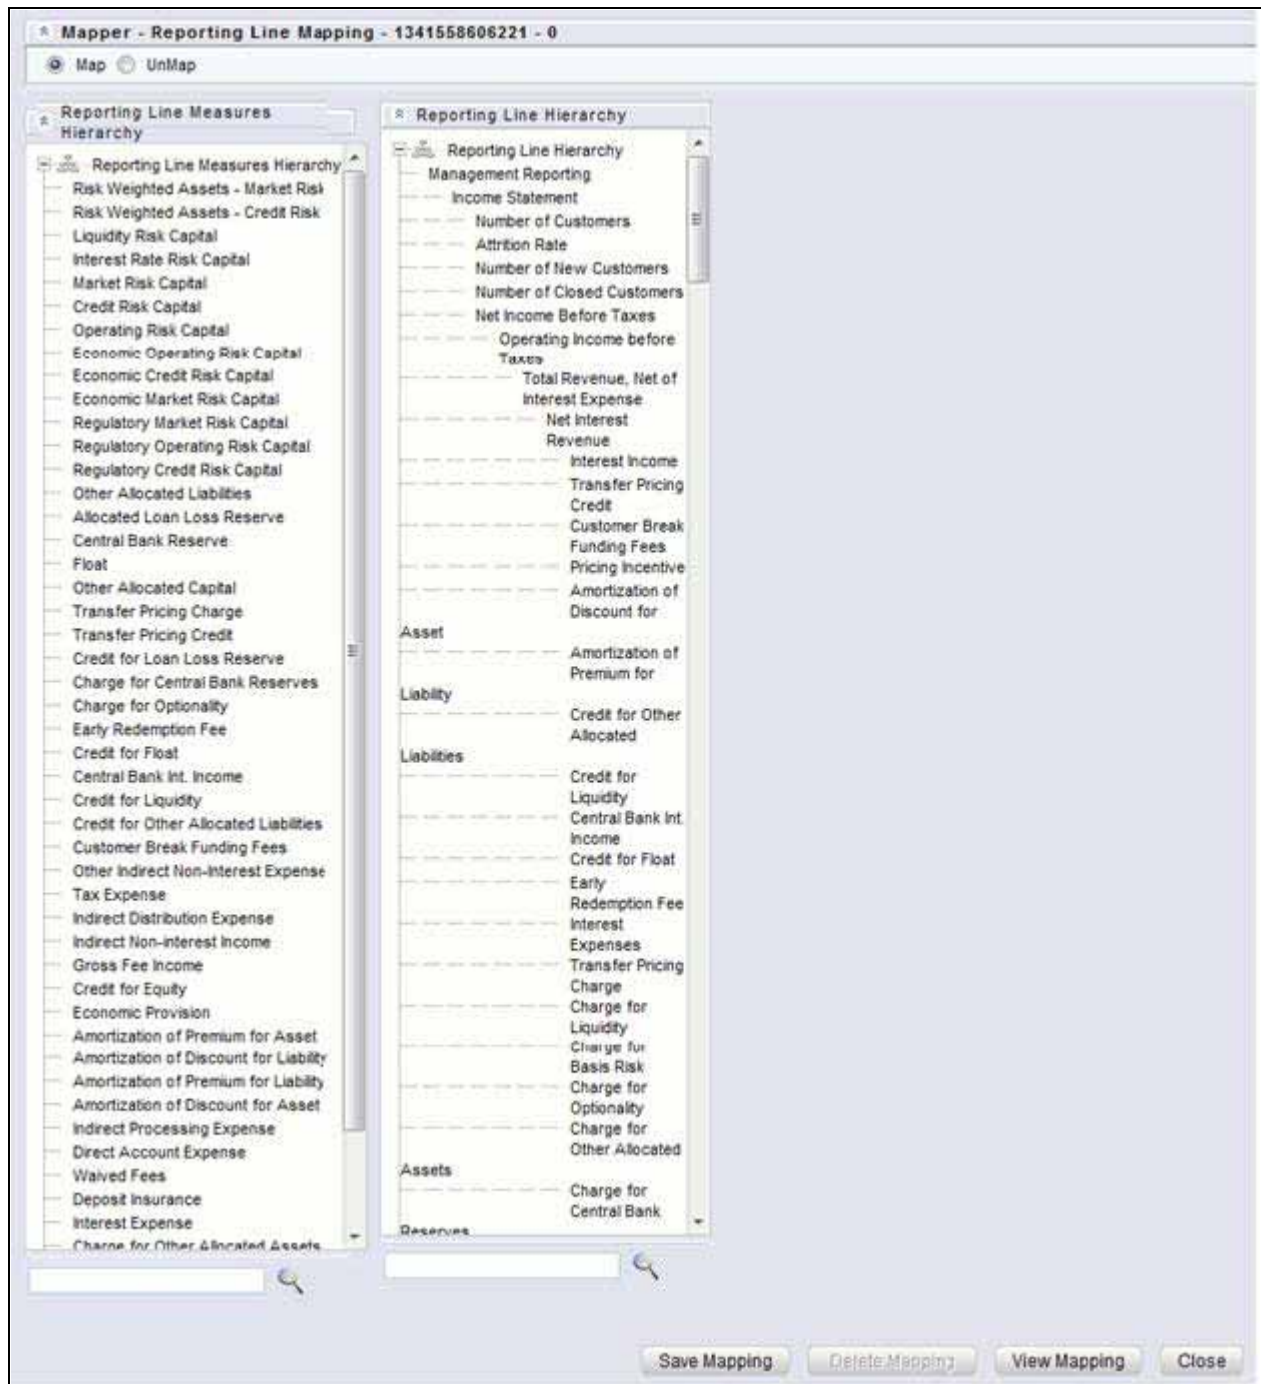


Figure 45. Mapper Definition - Reporting Line Hierarchy

For more information on defining/maintaining Mapper, refer to *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Steps to Define Mapping for Custom Reporting Line Items

Follow the below steps to define mapping for Custom Reporting Line items:

1. Add Custom Reporting Line or Modify existing Reporting Line.
2. Add Custom Reporting Line Hierarchy or modify existing seeded reporting line hierarchy.
3. Execute the seeded batch <INFODOM>_ **Repline_Dimension_Update** specifying the Reporting line hierarchy as parameter to batch.
4. Modify the seeded Business Metadata.
5. Map Maintenance.

Add Custom Reporting Line or Modify existing Reporting Line

Custom Reporting Lines can be added or modified from AMHM.

Following are the seeded attributes of Reporting Line Dimension:

- Financial Element Code
- GL Account Code
- Rollup Signage



Figure 46. Attributes

A Reporting line can be added or modified from the *Members* screen as shown below. To modify the existing reporting line, select the member by selecting the adjacent check box and select the **Edit** button on the menu bar.

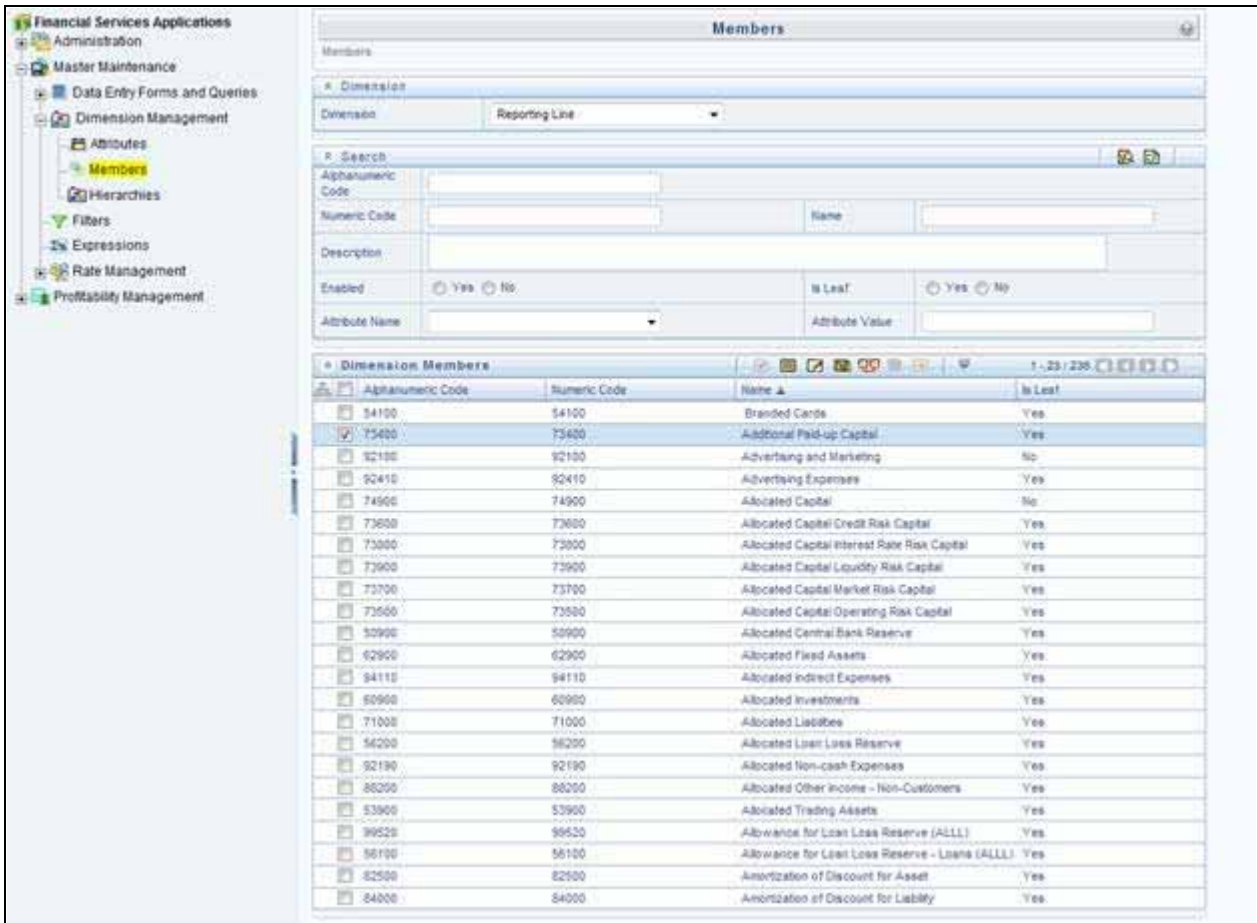


Figure 47. Members

To add a new reporting line, follow these steps:

1. Select **Add** button from the *Members* screen.

The *Member Definition (New Mode)* screen is displayed.

Figure 48. Member Definition (New Mode)

2. In the *Member Definition (New Mode)* screen:

- Enter **Numeric Code**.
- Enter the **Name** of the custom reporting line.
- Enter the **Description** of the custom reporting line.
- Select Yes, if the custom reporting line has to be **Enabled** or not.
- Select Yes, if the custom reporting line **Is Leaf** or not.
- Select the Attributes for the reporting line member.
- Save the Member definition.

To modify a reporting line, follow these steps:

1. Click **Edit** button from the *Members* screen.

The *Member Definition (Edit Mode)* screen is displayed.

Member Details	
Alphanumeric Code *	62900
Numeric Code *	62900
Name *	Allocated Fixed Assets
Description	Allocated Fixed Assets
Enabled	<input checked="" type="radio"/> Yes <input type="radio"/> No
Is Leaf	<input checked="" type="radio"/> Yes <input type="radio"/> No
Copy Attribute Assignment From	<input type="text"/> <input type="button" value="List"/>

Member Attributes	
Attribute	Value
FINANCIAL ELEM CODE *	10006 - CC_OP_12801620
GL ACCOUNT CODE *	10 digit number
PRECISION SCALE *	

Figure 49. Member Definition (Edit Mode)

2. In the *Member Definition (New Mode)* screen:

- Enter **Numeric Code**.
- Enter the **Name** of the custom reporting line.
- Enter the **Description** of the custom reporting line.
- Select Yes, if the custom reporting line has to be **Enabled** or not.
- Select Yes, if the custom reporting line **Is Leaf** or not.
- Select the Attributes for the reporting line member.
- Save the Member definition.

To modify a reporting line, follow these steps:

In the *Member Definition (Edit Mode)* screen, perform the following as required:

1. Modify the **Name** of the custom reporting line.
2. Modify the **Description** of the custom reporting line.
3. Modify the selection of the radio button in the **Enabled** field.
4. Modify the selection of the radio button in the **Is Leaf** field.
5. Modify the Attributes for the reporting line member.
6. Save the Member definition.

For more information, refer to *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Add Custom Reporting Line Hierarchy or Modify Existing Seeded Reporting Line Hierarchy

To create a new Reporting Line Hierarchy, follow these steps:

1. Click **Add** button from the menu. The *Hierarchy Definition (New Mode)* screen is displayed.

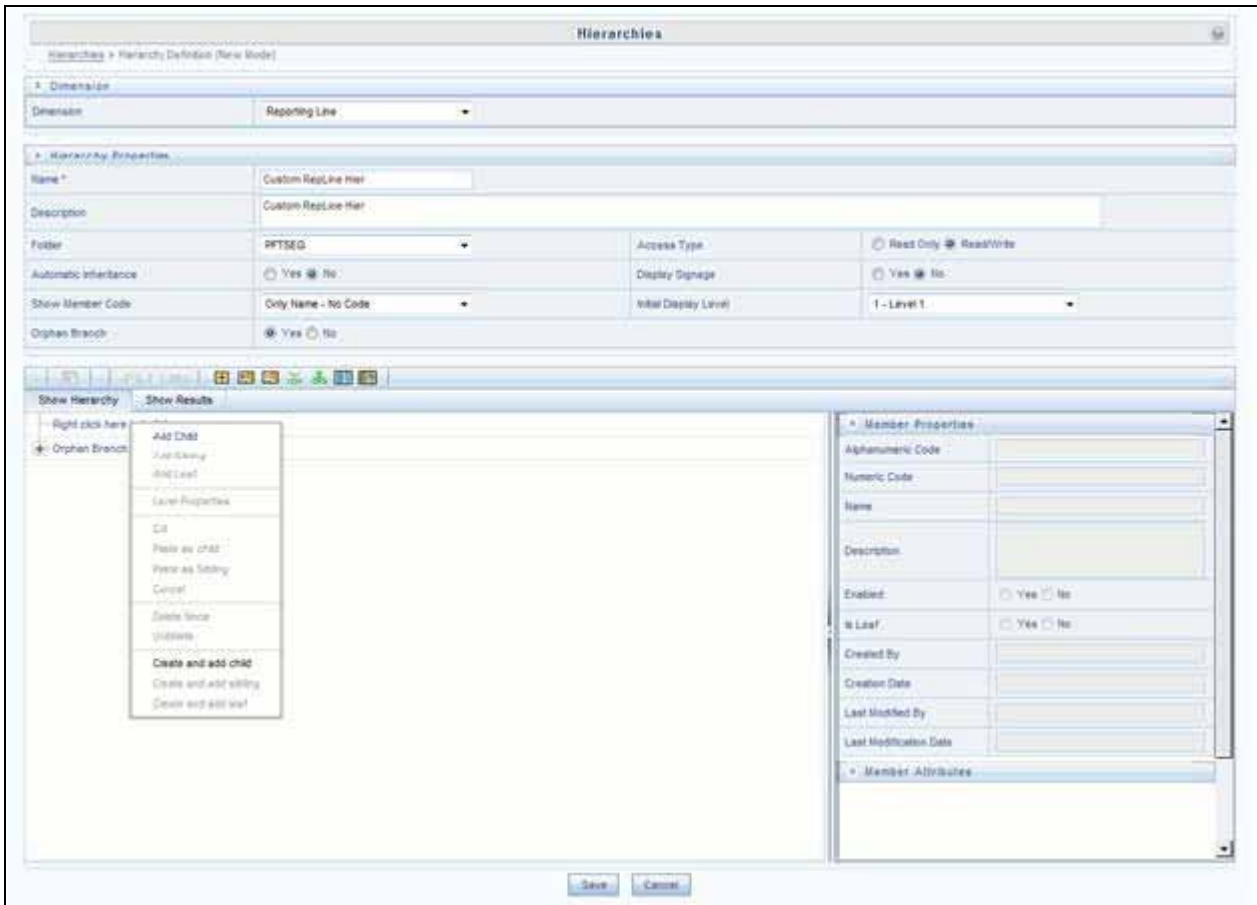


Figure 50. Hierarchy Definition (New Mode)

2. Enter the details in the required fields, and click **Save**.

Note: Alternatively, insert scripts and update scripts can be prepared into tables DIM_REPORTING_LINE_B, DIM_REPORTING_LINE_TL, DIM_REPORTING_LINE_ATTR, and DIM_REPORTING_LINE_HIER for adding any new custom reporting lines or modifying an existing reporting line.

Execute the seeded batch <Infodom>_ **Repline_Dimension_Update** specifying the Reporting line hierarchy as parameter to batch. It populates data into DIM_REP_LINE table. This batch invokes the DT fn_rep_line_parent_child.

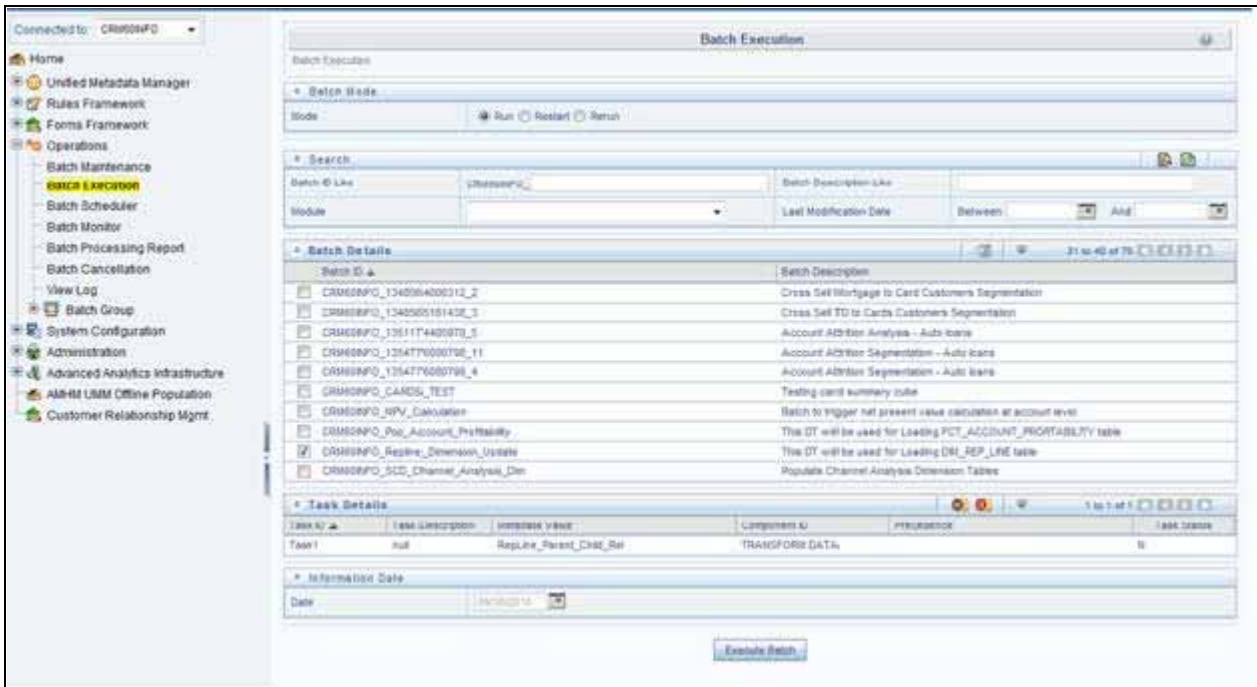


Figure 51. Rep Line batch execution

To modify existing seeded Reporting Line Hierarchy:

1. Select the check box adjacent to the Reporting Line Hierarchy to be modified.
2. Click **Edit** button from the menu.
3. Modify the Hierarchy as required and click **Save**.

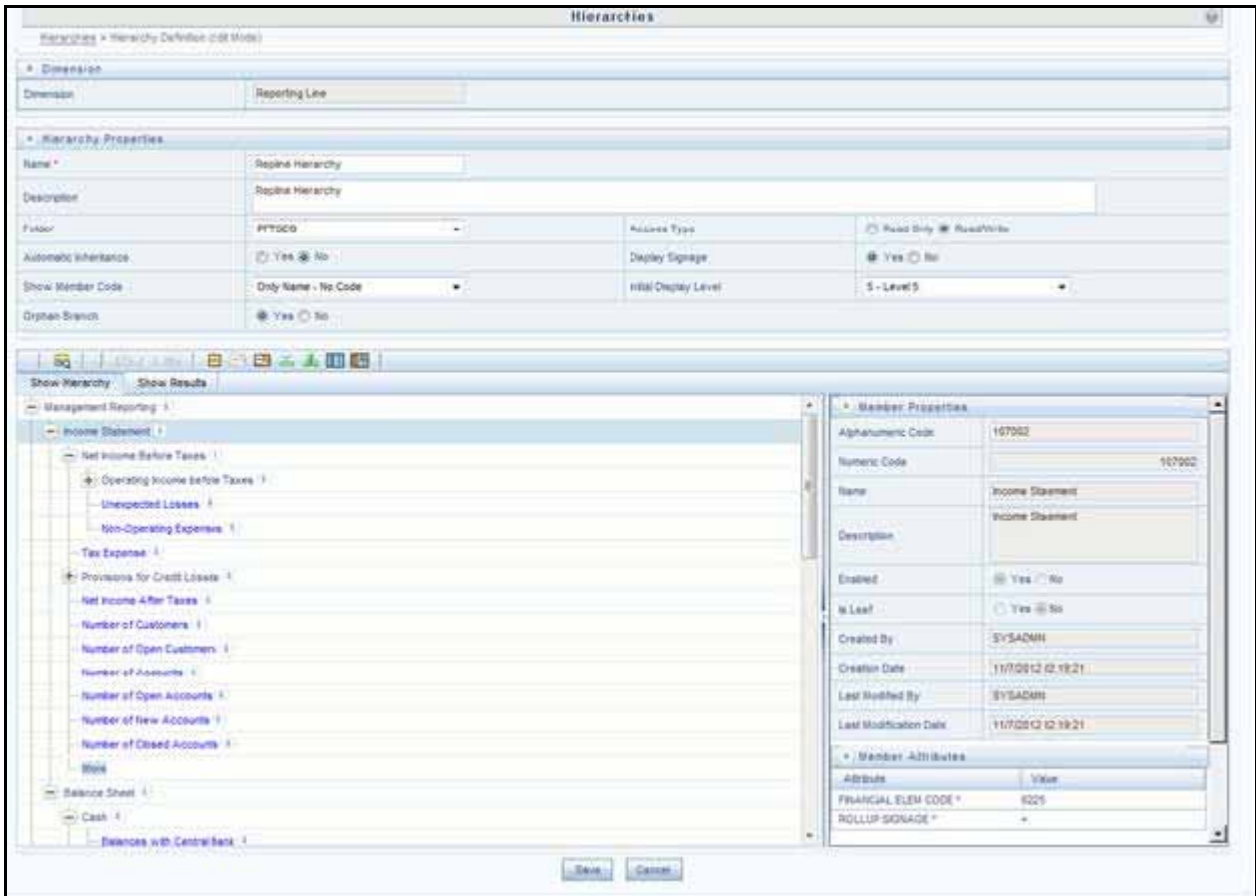


Figure 52. Hierarchies

For more information, refer to *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Modify the Seeded Business Metadata

1. Resave the Seeded Business Metadata parent child hierarchy, "Reporting Line Hierarchy" (HPFTRL), so that the changes done are consolidated in the hierarchy as well.

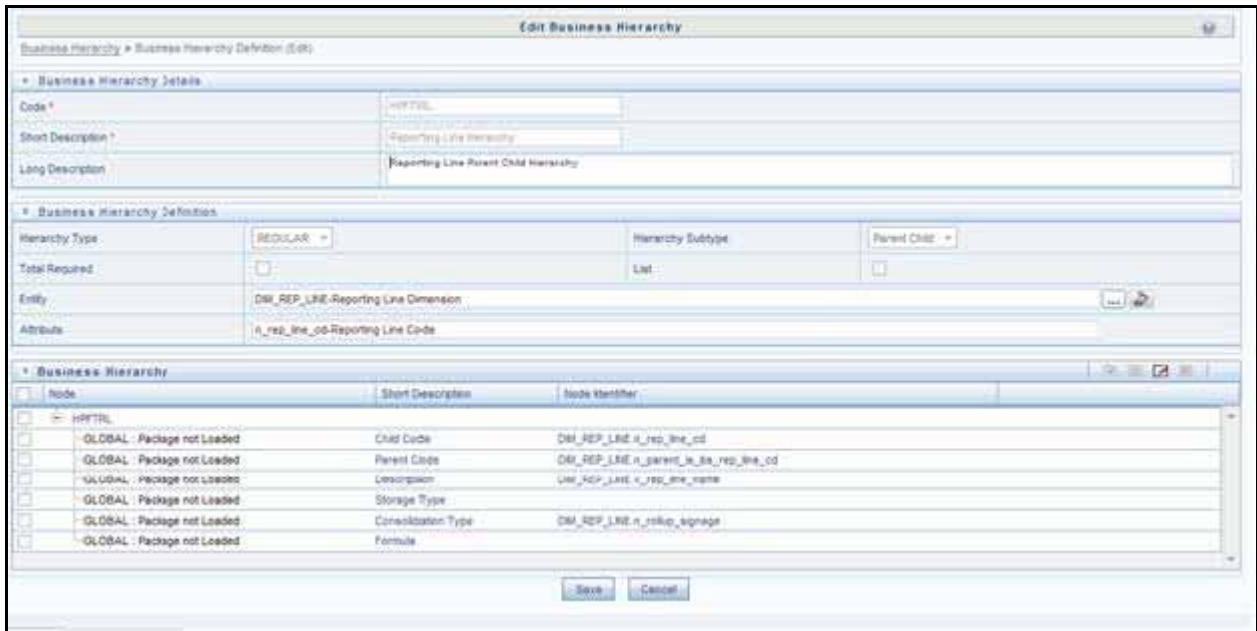


Figure 53. Business Hierarchy

2. (Optional) Create the Business Measures for the newly added reporting lines.
3. Attach and Save the defined Business Measures to the hierarchy "Reporting Line Measures".
4. Save the metadata.

For more information, refer to *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Map Maintenance

Once all the above steps are done, the seeded map configured between the Reporting Line Hierarchy and Reporting Line Measure Hierarchy has to be modified if required from Map Maintenance of OFSAAI.

For more information, refer to *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Rollup Signage and Operational Signage

In the context of Reporting Lines, the significance of Signage is that it indicates whether the Reporting Line Value in question will be an addition or a subtraction to the corresponding Parent Reporting Line. The reporting line values that are loaded to the Fact tables like FCT_ACCOUNT_PROFITABILITY or FCT_MGMT_REPORTING are leaf level reporting lines.

For example, consider the following hierarchy:

Reporting Line Hierarchy
▽ Income before Taxes
▷ Total Revenue
▷ Net Credit Losses
▽ Operating Expenses
Deposit Insurance
▽ Advertising and Marketing
Total Brand Management Expenses
Business Promotion Expenses
▷ Other Allocated Costs
▷ Processing Expenses
▷ Sales and Marketing Expenses
▷ Product Management Expenses
▷ Business Management Expenses
Indirect Processing Expense

The Fact table will not contain values for Advertising and Marketing as that value is expected to be calculated based on the "rollup" of the underlying leaf level values - Total Brand Management Expenses and Business Promotion Expenses. However, all the underlying values will not be added together. Some values will be expected as positive, and some will be expected as negative. For example:

Reporting Line Hierarchy	Rollup Signage
▽ Income before Taxes	1
▷ Total Revenue	1
▷ Net Credit Losses	-1
▽ Operating Expenses	-1
Deposit Insurance	-1
▽ Advertising and Marketing	1
Total Brand Management Expenses	1
Business Promotion Expenses	1
▷ Other Allocated Costs	1
▷ Processing Expenses	1
▷ Sales and Marketing Expenses	1
▷ Product Management Expenses	1

Hence, when Deposit Insurance rolls up into Operating Expenses, it is considered a subtraction. This rollup into the immediate parent is called Rollup Signage.

However, when rolling up further, (in this case, Income before Taxes), the signage of Deposit Insurance will be dependent on the rollup signage of Operating Expenses.

Operating Expenses = (-1) x Deposit Insurance

Income before Taxes = (-1) x Operating Expenses

Hence, when the leaf value Deposit Insurance rolls up into Income before Taxes,

Income before Taxes = (-1)x(-1) x Deposit Insurance = (+1) x Deposit Insurance

Hence, Rollup Signage of Deposit Insurance is -1 (or negative).

However, in relation to Income before Taxes, the Operational Signage of Deposit Insurance is +1 (or positive).

The effective signage of the leaf reporting line with respect to a parent reporting line is called Operational Signage.

Operational Signage of a reporting line is defined in relation to a parent reporting line. However, the Rollup Signage is always in relation to the immediate parent reporting line.

Prerequisites

Following are the lists of tables used in the population of Fact Account Profitability and these tables are required to be loaded prior to running the DT.

- DIM_DATES - Mandatory
- DIM_REP_LINE - Mandatory
- FCT_COMMON_ACCOUNT_SUMMARY
- FCT_PFT_ACCOUNT_SUMMARY
- FCT_FTP_ACCOUNT_SUMMARY
- FCT_REG_CAP_ACCOUNT_SUMMARY
- FCT_ECO_CAP_ACCOUNT_SUMMARY

For more information on SCDs, refer to Chapter 3, "Dimension Loading Process,".

Executing the Fact Account Profitability Population DT

To execute the DT component from OFSAAI ICC framework (accessed through *Operations* module), a seeded batch, <Infodom>_Pop_Account_Profitability has to be executed for the required MIS Date.

The screenshot shows the 'Batch Execution' window. It includes sections for 'Batch Mode' (Run, Restart, Rerun), 'Search' (Batch ID Like: CRM60NFO_Pop_Account_Profitability, Module: CRM60NFO, Last Modified Date: Between), 'Batch Details' (Batch ID: CRM60NFO_Pop_Account_Profitability, Description: This DT will be used for Loading FCT_ACCOUNT_PROFITABILITY table), 'Task Details' (Task ID: Task1, Task Description: null, Metadata Value: PFTBI_Acct_Reporting, Component ID: TRANSFORM DATA, Precedence: N, Task Status: N), and 'Information Date' (Date: 10/31/2013). An 'Execute Batch' button is at the bottom.

Figure 54. Execute Fact Account Profitability Population

Alternatively, you can create a new Task for an existing Batch from the *Batch Maintenance* screen, as mentioned below:

1. Select the check box adjacent to a Batch Name in the *Batch Maintenance* screen.
2. Click **Add (+)** button from the *Task Details* grid.

The *Task Definition* screen is displayed.

3. Enter the **Task ID** and **Description**.
4. Select the **TRANSFORM DATA** component from the **Components** drop down list.
5. In the Dynamic Parameters List, select the appropriate **Datastore Type** from the drop down list.
6. Select the appropriate **Datastore Name** from the drop down list. Usually it is the Information Domain name.
7. Select the **IP Address** from the drop-down list.
8. Select the Rule Name **FCT_ACCT_TRANSFORMATION** from the drop down list.
9. Enter the Parameter List details as mentioned below:

- Reload Account Profitability table for the given MIS Date flag – can be Y or N within single quotes.
- Reporting Currency code – This has to be enclosed within single quotes.

For Example, if reporting currency is in US Dollar, then '**USD**' has to be specified.

Note: Batch run ID and As Of Date are passed internally by the batch to the Data Transformation task.

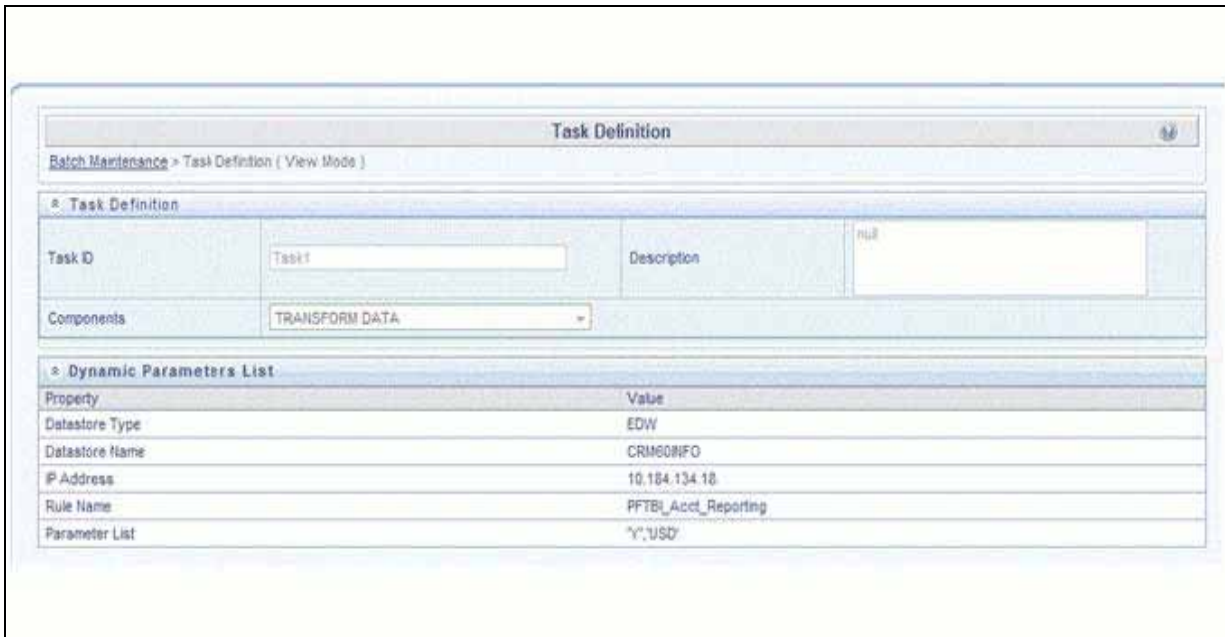


Figure 55. Task Definition

10. Execute the batch for which the Task has been created.

Note: The batches "<INFODOM>_POP_ACCOUNT_PROFITABILITY" and "<INFODOM>_aCRM_CRM_ACC_SUMM" populate a row with "Run skey & Reporting Currency Code" combo into the table RUN_EXE_PARAMETERS.

If the user wants to run both the batches or if the user wants to re-execute one of these batches for the same "Run skey & Reporting Currency Code" combo, then the previous entry made in the table RUN_EXE_PARAMETERS have to removed manually before executing the batch for this value combo. Failing to do this will lead to the error while executing the batch.

For more details, refer to *Operations* chapter in *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

Checking the Execution Status

The status of batch execution can be monitored from the *Batch Monitor* screen.

Note: For a more comprehensive coverage of configuration and execution of a batch, refer to *Operations* chapter in *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

The status messages in Batch Monitor are:

- N - Not Started
- O - On Going
- F - Failure
- S - Success

The execution log can be accessed on the application server in the following directory:

\$FIC_DB_HOME/log/date. The file name will have the batch execution id.

Executing the Seeded Run Rule Framework

The CRM account summary T2Ts and the Fact Account Profitability DTs are now compatible with the OFSAAI Run Rule Framework. On executing these items from the RRF, the summary tables will be automatically populated with new Run Skey values. This section helps with brief information on executing the seeded RRF process, to populate the CRM account summary and Fact Account Profitability tables.

The CRM account summary T2Ts and the Fact Account Profitability DTs are packaged with the conventional ICC batches as well as with OFSAAI Run Rule Framework. It is recommended to use the OFSAAI Run Rule Framework to execute these items.

Consider the following points before deciding the execution path.

- On executing these items through the Run Rule Framework, the run_skey value is automatically generated by the system and the same is populated in FCT_CRM_ACCOUNT_SUMMARY and FCT_ACCOUNT_PROFITABILITY tables.
- If the items are to be executed through ICC batch:
 - The user have to manually pass the run_skey value to be used while populating the records.
 - If the tables FCT_CRM_ACCOUNT_SUMMARY and FCT_ACCOUNT_PROFITABILITY already have the records for the run_skey being passed, the user have to manually delete these records from the tables before executing.
- Consider executing these items through ICC batch only if a repopulation for the same run_skey is to be performed.
- For a fresh run, it is always advised to use the Run Rule Framework.

1. Select the seeded process by name "CRMAS_ACCT_PFTY" available in the *Process* screen.



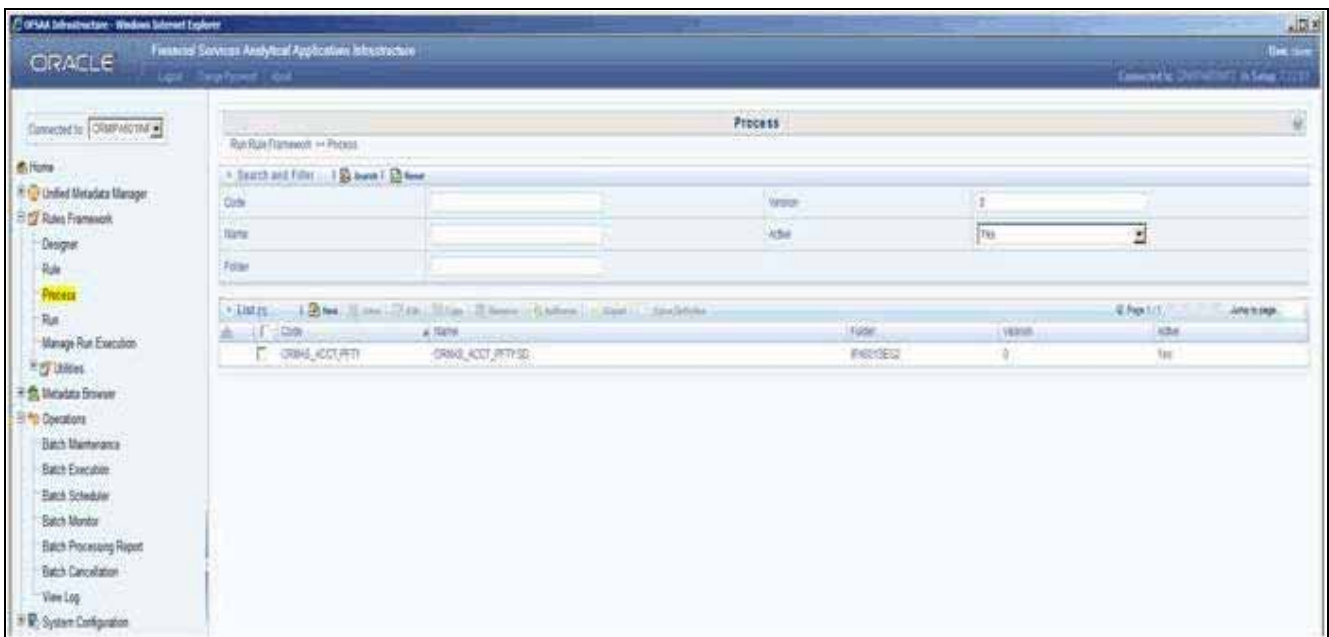


Figure 56. Seeded Run Rule Framework

2. Edit the process and click the "component" option.

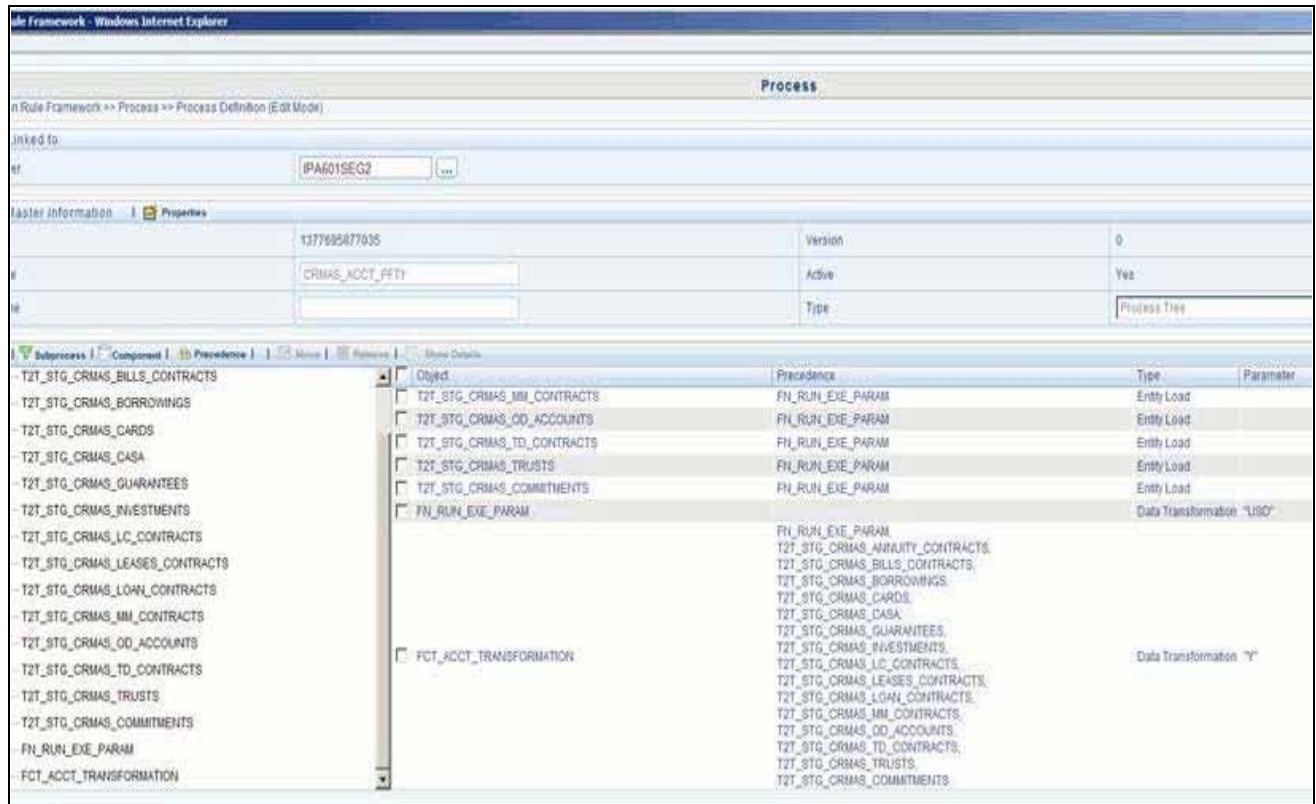

- From the list of tasks available in the right pane, click the arrow present near the " FN_RUN_EXE_PARAM" task.
- Feed in the currency code of the Reporting Currency.

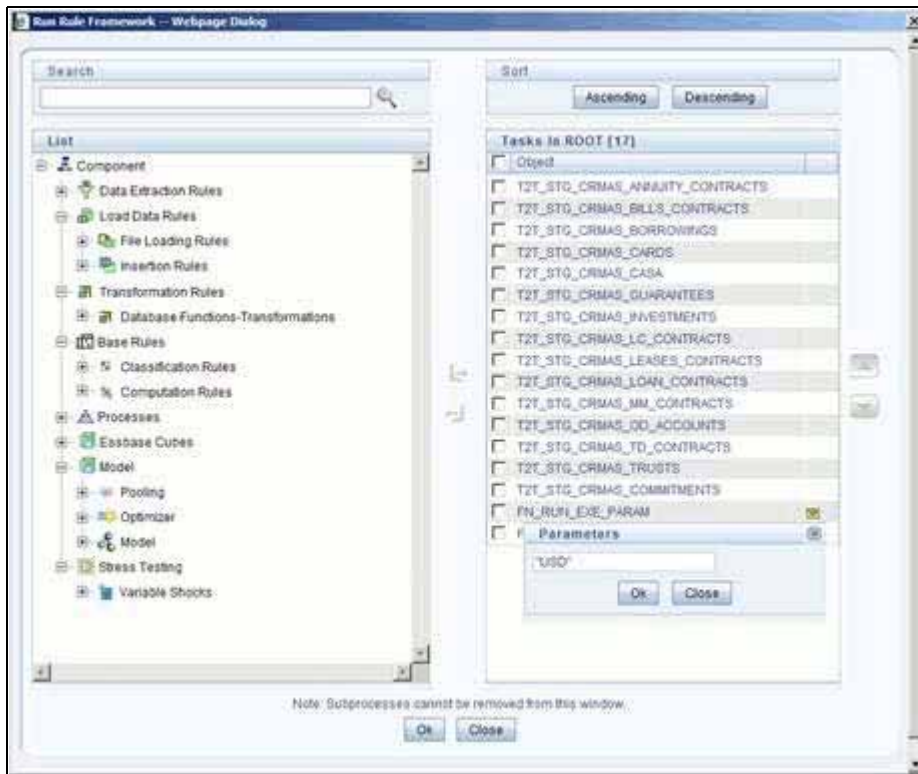

5. From the list of tasks available in the right pane, click the arrow present near the task by name "FCT_ACCT_TRANSFORMATION".
6. Feed the values for the below parameters as comma separated values enclosed individually in double quotes.
 - Re Run Flag
 - Regulator Capital flag (optional)
 - Economic Capital flag (optional)
7. Save the Process.
8. Select the seeded "Run" by name "CRMAS_ACCT_PFTY_RUN" and click **Fire Run**.
9. In the batch execution tab , select "Create & Execute" option from the **Batch** menu.
10. Select the desired MIS Date from the calendar and click **OK**.
11. The execution log can be accessed on the application server in the following directory:
\$FIC_DB_HOME/log/date & \$FIC_DB_HOME/log/t2t. The file name will have the batch execution id.

Note: For more information on configuration and execution of a Run rule, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

This chapter discusses the following topics:

- [Introduction](#)
- [Overview of Cubes](#)
- [Creating Configuration Files](#)
- [Building Of Cubes](#)

Introduction

Reports of OFSIPA application can be configured to work on Relational database or Essbase cubes. Source of data for the reports is determined by the priority set for each Logical Table Source (LTS) in OBIEE RPD. Multi-dimensional databases store aggregated data for better performance and provide mechanisms for performing non-additive rollup within a hierarchy and defining complex derived measures using cross-dimensional operations. OFSAA Infrastructure is used for defining metadata about the cube and for building the cubes. Cubes are optional source of data for Institutional Performance application.

The chapter contains the following sections:

- List of cubes seeded within the application
- Process for building cubes

Overview of Cubes

OFSIPA application has the following seeded cubes:

- Institutional Analysis
 - Purpose

The purpose of this cube is to provide analysis of various Account related measures across dimensions like Product, Line of Business, Vintage, and so on.
 - Dataset

This cube is based on the FCT_COMMON_ACCOUNT_SUMMARY, FCT_CRM_ACCOUNT_SUMMARY, FCT_COMMON_CUSTOMER_SUMMARY, and FCT_CRM_CUSTOMER_SUMMARY fact tables.
- RM P and L Cube
 - Purpose

The purpose of this cube is to provide details of Profit and Loss statement of a Relationship Manager across dimensions like Line of Business, Product, Organizational Unit, and so on.

- Dataset

This cube is based on the FCT_ACCOUNT_PROFITAIBILITY and FCT_ACCOUNT_MGR_REL fact tables.

In case there is an error with the Relationship Manager cube saving or execution for the first time after the installation the parent child hierarchies must be saved by editing the hierarchies individually and re-saving them after which the cube needs to be saved successfully and re-executed.

Creating Configuration Files

Each cube has a configuration file that contains the details of dimensions and measures which are part of the cube. Essbase outline is created using the configuration file. Configuration files for seeded cubes are available as part of the installer. However, if there are any changes to cube definition then configuration files are recreated during saving of the cube definition.

Follow these steps:

1. On the LHS menu of OFSAAI, go to **Home > Unified Metadata Manager > Business Metadata Management > Cubes**.
2. Click Search and check if you can see the cubes in the pop up window that opens.
3. Click on the cube that needs to be built and click **OK** to return to the Cube Definition Screen.
4. Click **Save** to save the cube. A pop up appears saying 'Operation Successful'.

Note: Cube definition will be saved only when the UI component detects any change event. In order to trigger the change event, type a blank space in 'Long Description' text-box and remove the same. Or a dimension can be removed from selected list, again the same dimension re-selected, variation applied for the dimension and saved.

Building Of Cubes

The Cube build process in OFSAA Infrastructure contains the following steps:

1. Generating an aggregate DATA file containing the measure values for each dimension leaf that are part of the cube definition. This is performed by the **AGGREGATE DATA** component task within the batch definition.
2. Creating the cube outline on Essbase server. This is performed by the **CREATE CUBE** component task within the batch definition.
3. Loading the data to the cube. This is performed by the **CREATE CUBE** task within the batch definition

This section covers the following topics:

- Prerequisites
- Tables used by the Cube build component
- Executing the Cube build task

- Checking the execution status

Prerequisites

Following are the prerequisites for creating a cube:

1. All the post install steps mentioned in the OFSAA Infrastructure installation guide and Solution installation manual have been completed successfully.
2. Parentage files need to be created for BI hierarchies after dimension data is loaded. 'Resave Metadata' process is used to create the parentage files.
3. OFSAAI application user needs to have the required functions mapped to the user for doing Resave Metadata and accessing the Home> Unified Metadata Manager > Business Metadata Management screens and executing a batch from Application batch operations screen
4. Execute Save Metadata by navigating to the following screen on the OFSAAI framework LHS Menu.
5. Go to **Home>Administration>Save Metadata**.
6. Choose all the available metadata under Hierarchy and move it to the right by using the '>>' button.
7. Click **Save** and might take a few minutes for the saving to complete.
8. Click **Show Details** to view the log for the Save operation.
9. Ensure that the following services are running on the application server before doing a cube build:
 - Iccserver
 - Router
 - AM
 - Messageserver
 - Olapdataserver
10. Batches need to be created for executing, which is explained in the Executing the Cube build section.
11. All the required tables for dataset need to be populated before you execute the cube batches, such as Dimension Population, Time Dimension population, Account Summary Population and Fact Ledger Population.
12. The dataset for the cube should return some rows in the database for the cube build to happen.
To check the same, perform the following steps:
 - Navigate to **Home>Unified Metadata Manager >Business Metadata Management >Data Sets**.
 - Click **Search**.
 - Click any dataset in the pop up which opens and click Ok to return to the data set screen.
 - Click the button on right of ANSI Join text box. Enter the required expression or click the below button to define an expression using the Expression screen.
 - Click **OK** to return to the data set screen.
13. Perform the same for Join/Filter Condition and Date filter.

14. Frame a SQL query like this:

```
Select count(1) from <Enter the part you obtained from Ansi join  
part above>where<Enter the part you obtained from Join/Filter  
Condition & Date filterparts>
```

This query should show record count greater than zero when you fire this from SQL prompt in the database.

Tables Used by the Cube Build Component

Tables that are part of the dataset need to be populated before executing the cube build component. In addition, REV_BIHIER table in atomic database schema stores the hierarchy data for Business Intelligence-enabled hierarchies for cube build. This table gets populated when a hierarchy is saved using *Save Metadata* screen.

Executing the Cube Build Task

To execute the cube build process from OFSAAI ICC framework (accessed through the application Batch Operations screen), create a new Batch with two tasks – one for performing Data crunching (component is Aggregate Data) operations and another for building cube (component is Build Cube). The above batch needs to be created for each of the cubes.

- **Aggregate Data Task**

1. From the Home menu, select **Operations** and then select **Batch Maintenance**.
2. Click New Batch ('+' symbol in Batch Name container) and enter the Batch Name and Description.
3. Click **Save**.
4. Select the Batch you created in the earlier step by clicking on the check box in the Batch Name container.
5. Click New Task ('+' symbol in Task Details container).
6. Enter the Task ID and Description.
7. In the Component drop down, choose **Aggregate Data**.
8. Select the following from the Dynamic Parameters List and then click Save:

- Datastore Type - Select the appropriate datastore from the list.
- Datastore Name - Select the appropriate name from the list.
- IP address - Select the IP address from the list.
- Cube Parameter - Choose the cube code to be built from the drop down list.
- Operation - Choose All from the drop down list.

- **Create Cube Task**

1. In the batch created in Aggregate Data task above, click New Task ('+' symbol in Task Details container).
2. Enter the Task ID and Description.
3. In the Component drop down, choose Create Cube.
4. Select the following from the Dynamic Parameters List and then click Save:

- Datastore Type - Select the appropriate datastore from the list.
- Datastore Name - Select the appropriate name from the list.
- IP address - Select the IP address from the list.
- Cube Parameter - Choose the cube code to be built from the drop down list.
- Operation - Choose All from the drop down list.

5. Execute the batch created in the above step.

Note: A common issue in the Aggregate task is Data Set not having records for which the steps mentioned in the prerequisites have to be followed or the SQL query in Data Cruncher log file has to be checked on the database (Location of log file mentioned in the 'Checking the Execution Status' section below). In the Create Cube task one common error is the hierarchy member being the same for two different dimensions which are part of the same cube (Error message: 'Duplicate Alias' in the Create Cube log file). In this case, you can try appending a string to the Hierarchy member code so that it is unique across the cube or changing the hierarchy data to make the node unique across the cube.

Seeded batches are provided along with the IPA application installer. The following describes the OFSIPA seeded batches:

- Institutional Analysis

Seeded batch <INFODOM_aCRM_InstitutionAnalysis_Cube is provided with the installer. Execute the batch for the required MIS Date.

- RM P and L Cube

Seeded batch <INFODOM_ReIn_Mgr_Cube> is provided with the installer. Execute the batch for the required MIS Date.

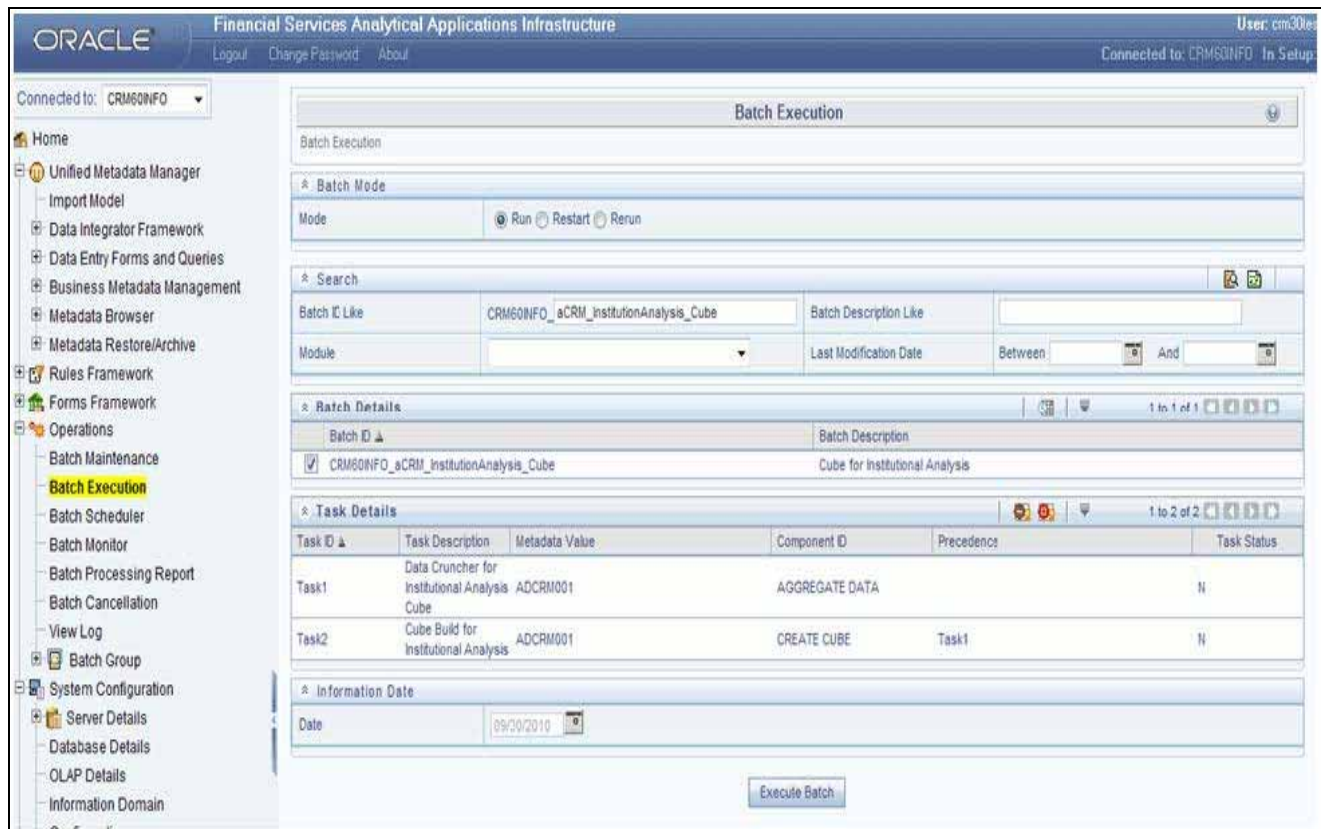


Figure 57. Batch execution

Checking the Execution Status

The status of execution can be monitored using the Batch Monitor screen. This you can access by navigating to the following screen on the LHS menu screen: **Home >Operations >Batch Monitor**.

Note: For a more comprehensive coverage of configuration and execution of a batch, refer to *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

The status messages in Batch Monitor are:

- N - Not Started
- O - On Going
- F - Failure
- S - Success

The execution log can be accessed on the application server in the following directory `$FIC_DB_HOME/log/dc` for the Task 1 above (Aggregate Data). The file name will have the Batch Execution ID.

The execution log can be accessed on the application server by going to the following directory `$FIC_DB_HOME/log/olap` for the Task 2 above (Create Cube). The file name will have the Batch Execution ID.

Note: Refer to How to Develop a New Cube, page C-1 on how to add a New cube or modifying existing ones. For any new cube added using the OFSAAI framework Cube screen, the tasks for execution are the same as mentioned above.

This chapter discusses the following topics:

- [Introduction](#)
- [Guidelines](#)
- [Files Used](#)
- [Errors](#)

Introduction

What-if analysis reports use the reporting line forecast values that are generated using the Arima Algorithm in the R code seeded with the application. R has a base package called "stats" which provides the function called as "arima()". This function enables the usage of ARIMA technique for time series forecasting.

Note: Projected data is generated through statistical modeling. ARIMA/ARIMAX modeling is used to create the projected data up to a period of 5 years. Historical data for last 2 years is used for creating the projections. The projections is made at an account level. When making the projections for accounts based on the life of the accounts following rules need to be followed:

- 1 to 12 MOB – Use segment information of the account to create projections
- More than 12 MOB – The projections should be solely based on historical data of the account.

Guidelines

Following are the guidelines associated with respect to the execution R code:

- Data should be generated for at least one group for more than 12 continuous mis dates. 12 is the parameter n. Consider where we are setting how many records is significant to be considered for prediction.
- Assumption is that the data is chronological for consecutive end of month dates. By default, prediction is done for 60 months starting with the immediate month after the last available MIS Date.
- If the data provided is not for chronological end of month dates, results generated will not be accurate.
- ARIMA is a statistical technique used for time series predictions. It accepts a host of parameters of which the basic parameters are p, q, and d. p is the order of Autoregressive Process, q is the parameter for Moving Average process, and d is the number of differences after which the data can be considered stationary with a desired confidence level. It has more parameters that can be customized.
- Detailed documentation of the technique can be found at:
 - <http://www.dms.umontreal.ca/~duchesne/chap7.pdf>
 - [<http://http://www.dms.umontreal.ca/~duchesne/chap7.pdf>]
- Documentation of implementation of ARIMA in R can be found at:

- <http://stat.ethz.ch/R-manual/R-patched/library/stats/html/arma.html>
- [<http://stat.ethz.ch/R-manual/R-patched/library/stats/html/arma.html>]
- Logging for the individual groups' arima model summaries happens in a file named "out.log". This log file is generated in \$FIC_DB_HOME/bin folder. If a particular group has unstable data and prediction fails, corresponding error is also documented in the out.log file against that particular group.

Files Used

Two files are required for R script execution. Both the files are present at \$FIC_DB_HOME/bin folder and need execute permissions. Following are the files used:

- RExec executable
- ARIMA_AVF.r

Errors

Following are the errors:

- Subscript out of bounds usually means that sufficient data has not gone in. Model is trying to apply an algorithm on a dataset that is returning null chunk.
- Error: Error in if ((lv > nr) || (lv == 0L && nr > 0L) || (nr%%lv != 0L)) stop(gettextf("replacement data has %s rows, data has %s",:))
 - missing value where TRUE/FALSE needed
 - means an if condition is receiving null and is unable to evaluate true or false

This chapter discusses the following topics:

- [Introduction to Dashboards](#)
- [Dashboards](#)

Introduction to Dashboards

Oracle Financial Services Institutional Performance Analytics (OFSIPA) offers dashboards to users that organize different kinds of reports by subject area.

These reports present:

- Behavioral and Engagement trends of its target segments – exposures, commitments, line utilization, assets/liabilities, deposits, withdrawals, fees, income, recent transactions and so on.
- Performance of the business and underlying customers.
- Product holdings and Relationship depth across the organization (that is Corporate client and any of its sub-divisions or subsidiaries)
- Efficiency of the sales force in terms of ongoing customer revenue generation, cross-sell and up-sell, product usage and pipeline.
- Efficiency of investments (like marketing, partner development)

Note: Time hierarchy prompted reports are all drill enabled on time hierarchy. On first load, the values are visible for a year, and on subsequent drills, we obtain values for quarter and month. These are not drill through reports.

Dashboards

Following tabs are present in the institutional performance dashboard:

- [Summary](#)
- [Customer Summary](#)
- [Cross-Sell](#)
- [Top 10 Opportunities](#)
- [Opportunities](#)
- [Activities](#)
- [Customer Performance](#)
- [Product Performance](#)
- [Line of Business Performance](#)

- [Balance Sheet](#)
- [Relationship Manager Performance](#)
- [Customer Central](#)
- [Other Performance Metrics](#)
- [What-If Analysis](#)

The following screenshots display the essential nature of the available reports as per each tab:

Summary

- Open Customers by Product

This report provides the number of Open Customers along with the associated products within a Line of Business over time.

Open Customers by Product		▶ 2015	
Time run: 7/22/2015 12:42:10 PM			
Line of Business	Product	No. of Open Customers	% Change
Corporate Banking	Apex Current Account	1	
	Gold Card	4	
	Institutional Savings	3	
	Mortgage Plus	26	
	Platinum Card	5	
	Platinum Plus	7	
	Salary Accounts	7	
	SavingsMax Account	2	
	Signature Card	5	
	Supreme Current Account	5	

[Analyze](#) - [Edit](#) - [Refresh](#) - [Print](#) - [Export](#)

Figure 58. Open Customers by Product

- Revenue Distribution

This report displays the breakdown of Revenue by Line of Business.

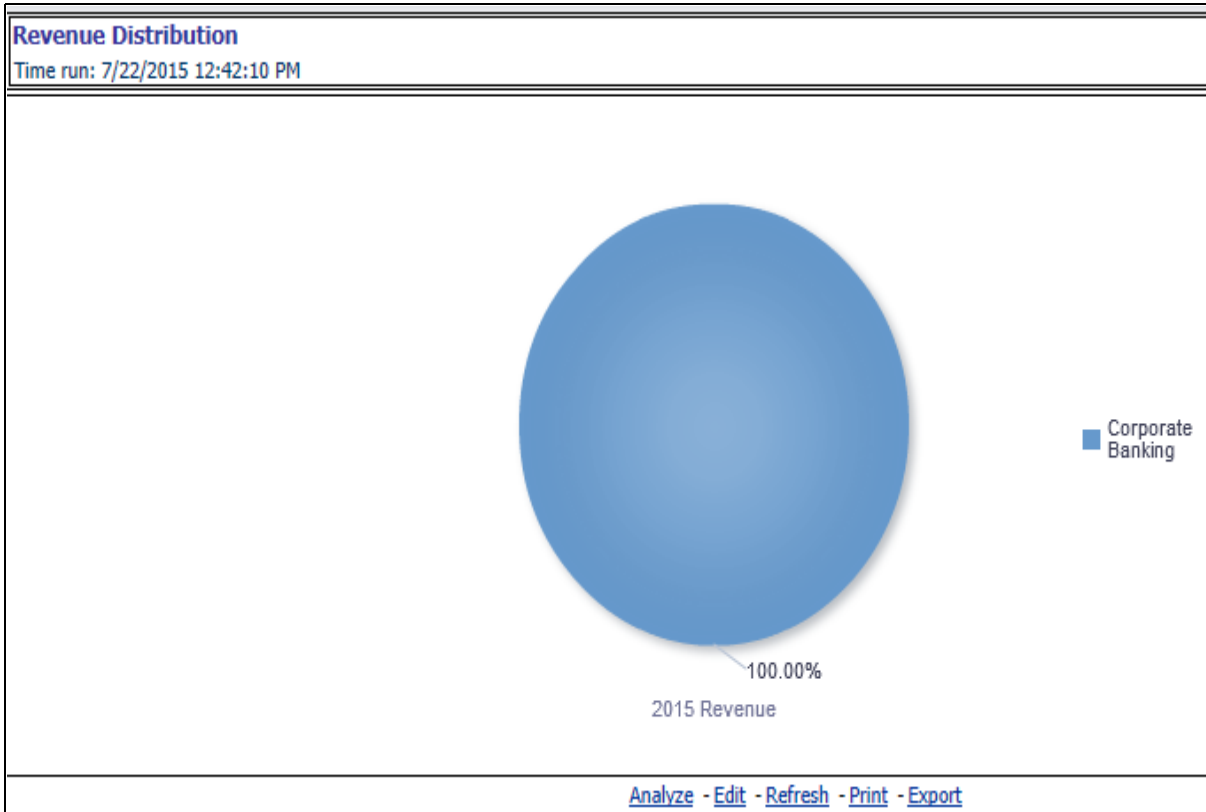


Figure 59. Revenue Distribution

- Customer Summary by LOB

This report details about the customers along with a Line of Business.

The figure is a table titled "Customer Summary by LoB" with a subtitle "Time run: 7/22/2015 12:42:10 PM". The table has columns for "Line of Business" and two main sections for the years 2015 and 2016. Each year section contains six columns: "No. of New Customers", "% Change over Previous Period", "No. of Lost Customers", "% Change over Previous Period", "No. of Open Customers", and "% Change over Previous Period". The data for Corporate Banking in 2015 shows 0 new customers, 0 lost customers, and 26 open customers. The 2016 section is currently empty. Navigation links "Analyze - Edit - Refresh - Print - Export" are located at the bottom of the table.

Line of Business	▶ 2015						▶ 2016					
	No. of New Customers	% Change over Previous Period	No. of Lost Customers	% Change over Previous Period	No. of Open Customers	% Change over Previous Period	No. of New Customers	% Change over Previous Period	No. of Lost Customers	% Change over Previous Period	No. of Open Customers	% Change over Previous Period
Corporate Banking	0		0		26							

Figure 60. Customer Summary by LOB

- Top 10 Products

This report outlines the top 10 products across all lines of businesses as ranked by the number of customers of that product.

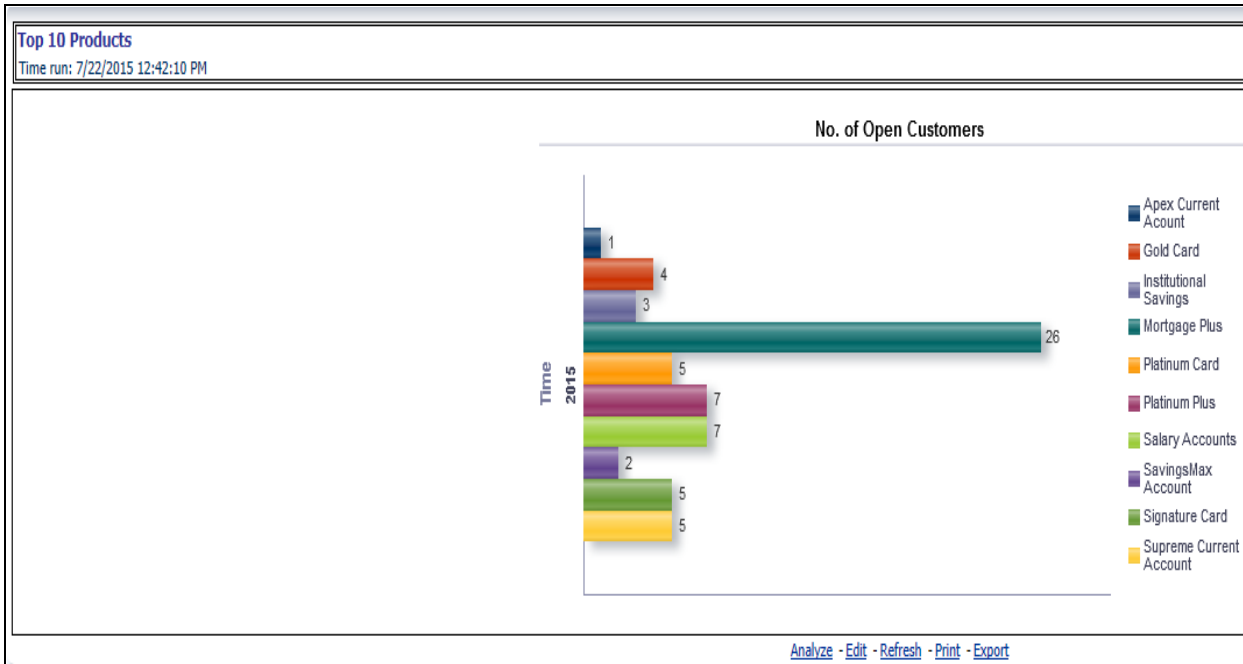


Figure 61. Top 10 Products

- Product Revenue Analysis

This report displays the growth of revenue across various bank products over time.

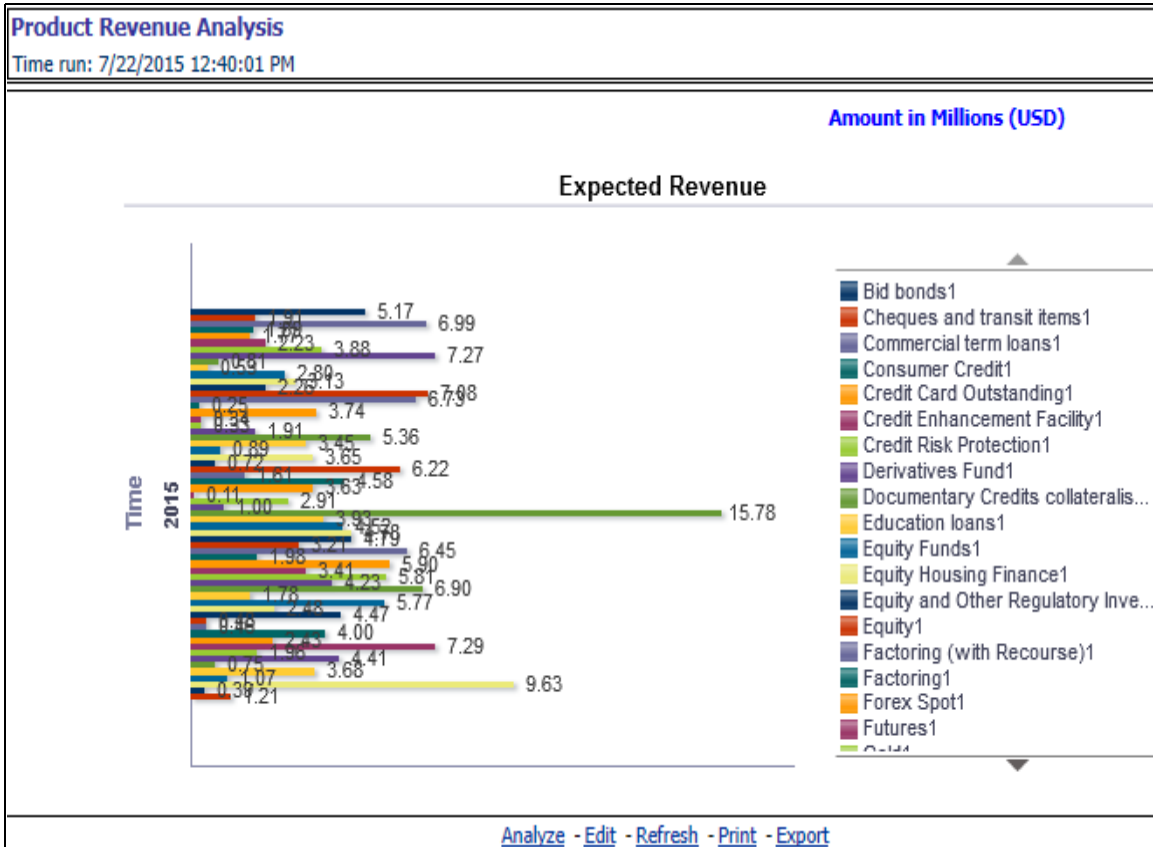


Figure 62. Product Revenue Analysis

- Product Penetration Report

This report demonstrates the depth of customer relationships across bank products. It outlines number of customers that have either one product, two products, or three products relationships with the bank.

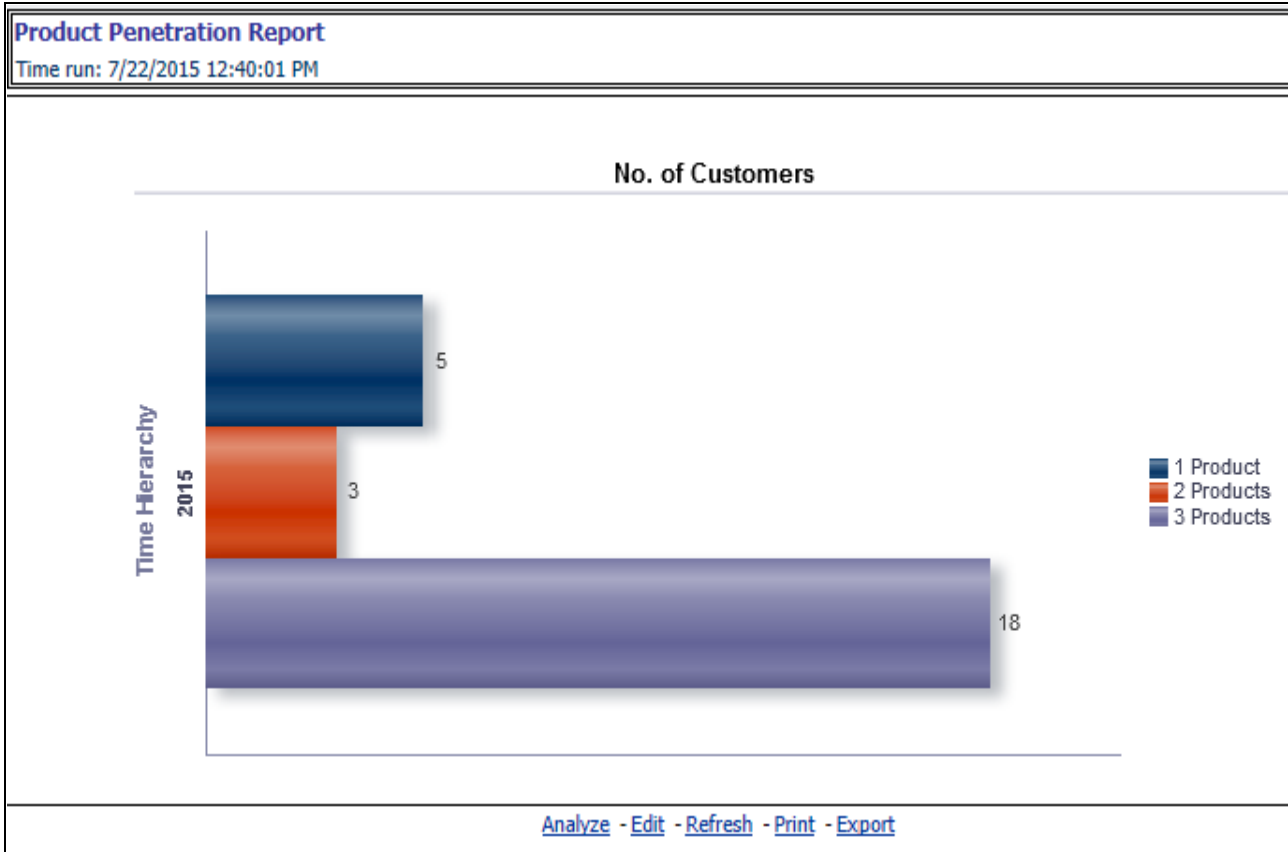


Figure 63. Product Penetration Report

Customer Summary

- Customer Distribution

This report provides the distribution of the client base across the various industry verticals.

Customer Distribution		▷ 2015	
Time run: 7/22/2015 12:40:27 PM			
Line of Business	Industry	No. of Open Customers	% of Total
Corporate Banking	All Industries	1	3.8%
	Finance	4	15.4%
	Information Technology	3	11.5%
	Manufacturing	1	3.8%
	Professional	1	3.8%
	Property	2	7.7%
	Public	4	15.4%
	Retail	5	19.2%
	Transportation	3	11.5%
	Whole Sale	2	7.7%
Grand Total		26	100.0%

[Analyze](#) - [Edit](#) - [Refresh](#) - [Print](#) - [Export](#)

Figure 64. Customer Distribution

- Top 10 Customers by Revenue

This report outlines the top 10 customers of the bank along with associated revenue generated by the customer.

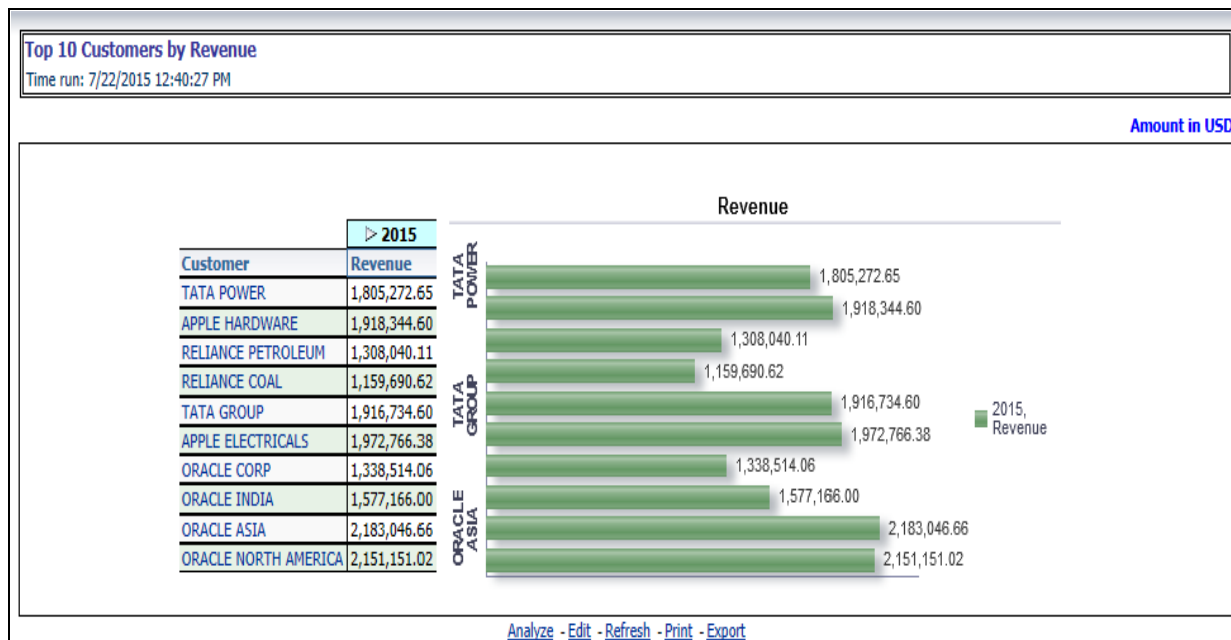


Figure 65. Top 10 Customers by Revenue

- Customer Distribution By Region

This report provides details about customers distributed among various region along with the Line of Business.

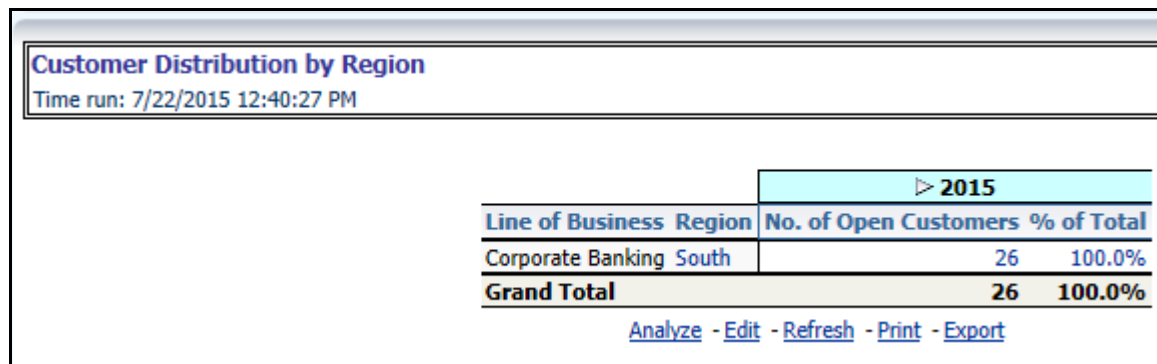


Figure 66. Customer Distribution By Region

- Top 10 Products by Open Customers

This report outlines the top 10 products within a line of business ranked by number of Open Customers along with the associated revenue.

Top 10 Products by Open Customers			
Time run: 7/22/2015 12:40:27 PM			
Amount in Millions (USD)			
Product	▶ 2015		
	No. of Open Customers	Revenue	% of Revenue
Apex Current Account	1	(0.02)	(0.00)
Gold Card	4	2.73	17.3%
Institutional Savings	3	(0.40)	(0.03)
Mortgage Plus	26		
Platinum Card	5	4.58	29.0%
Platinum Plus	7	6.28	39.7%
Salary Accounts	7	(1.49)	(0.09)
SavingsMax Account	2	(0.05)	(0.00)
Signature Card	5	4.79	30.3%
Supreme Current Account	5	(0.62)	(0.04)

[Analyze](#) - [Edit](#) - [Refresh](#) - [Print](#) - [Export](#)

Figure 67. Top 10 Products by Open Customers

Cross-Sell

- Cross-sell Performance

This report outlines the performance of the Open Customers along with the associated products.

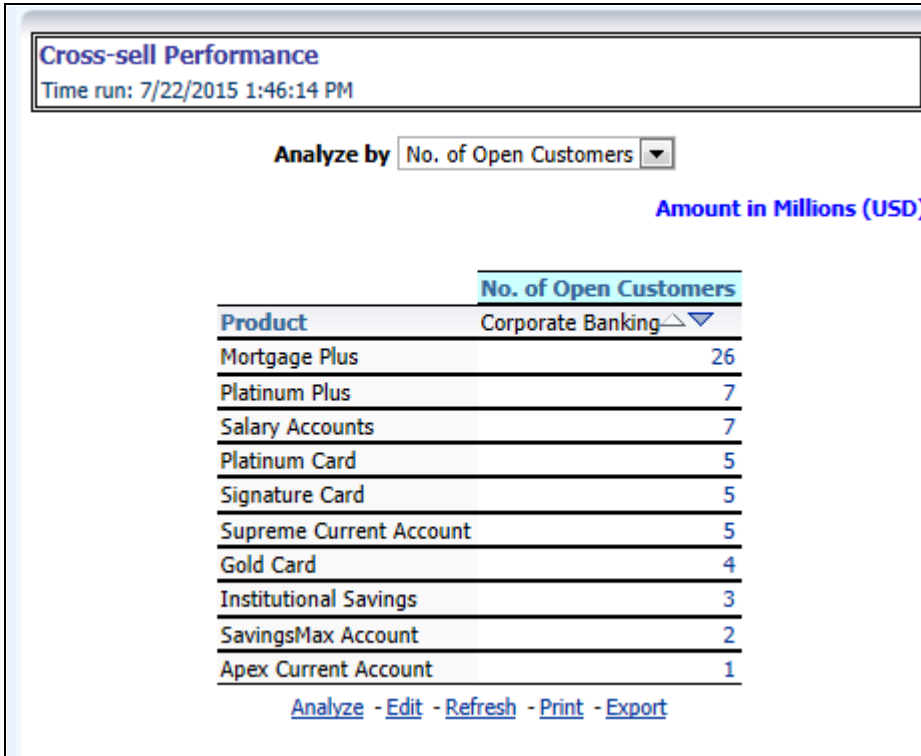


Figure 68. Cross-sell Performance

- Cross-sell over Time

This report displays time series outlining the growth of opportunities and growth in number of customers across the same time period.

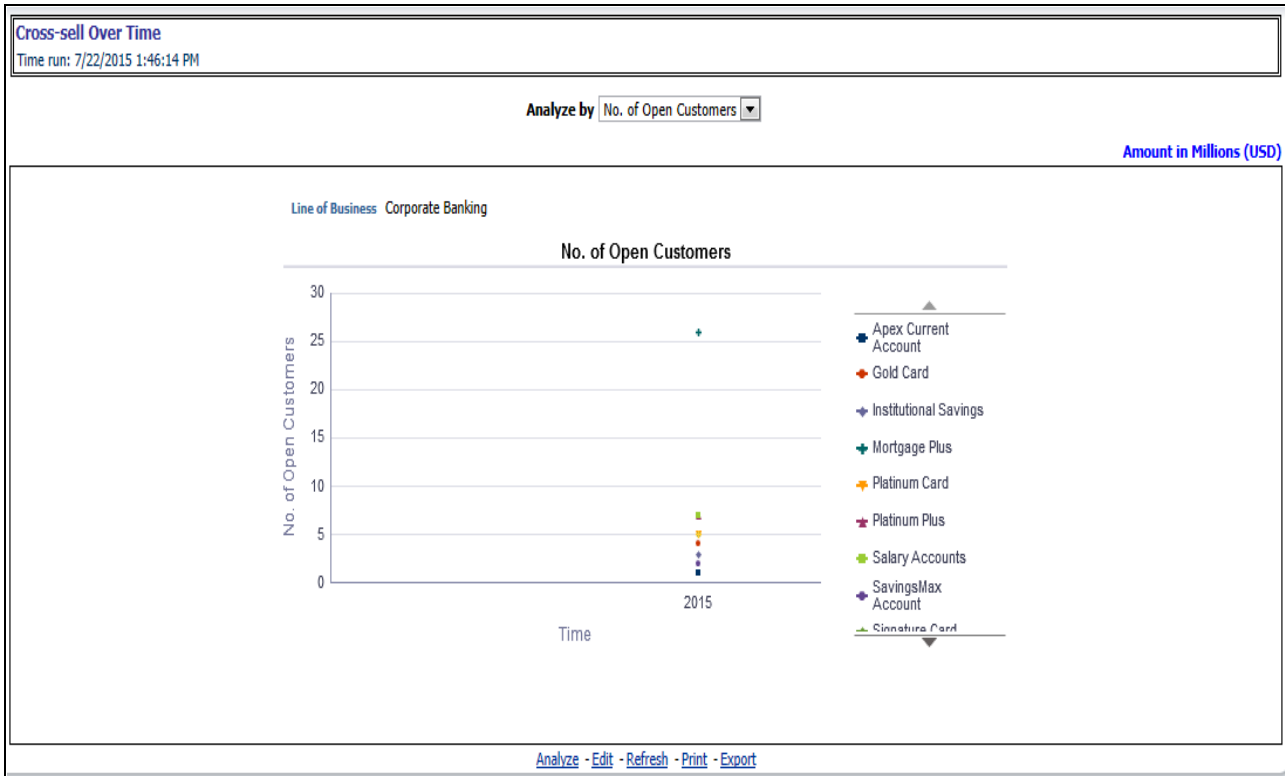


Figure 69. Cross-sell over Time

Top 10 Opportunities

- Top 10 Sales Employees

This report displays top 10 sales employees and identifies the best employee as ranked by the Estimated Revenue against deals closed by them. It also shows the number of wins and losses for the employee.

Top 10 Sales Employees					
Time run: 7/22/2015 12:58:31 PM					
Amount in Millions (USD)					
Rank	Employee	Expected Revenue	No. of Wins	No. of Losses	Incentives
1		9.88	16	7	
2	B.K. Liebsung	7.64	11	2	
3	Mark Anthony	6.40	11	3	
4	A.J.Peter	5.84	9	1	
5	David Thomos	4.22	8	1	
6	Thomos Martinez	4.17	9	1	
7	Stephen MAGILL	3.43	6	1	
8	Alfred Taylor	2.56	6	1	
9	George Andy	2.25	4	2	
10	Fransis Lucid	1.96	5	2	

[Analyze](#) - [Edit](#) - [Refresh](#) - [Print](#) - [Export](#)

Figure 70. Top 10 Sales Employees

- Top 10 Current Quarter Opportunities

This report lists top 10 opportunities as ranked by Expected Revenue. This report also lists the product being sold and sales employee working on the deal and the probability of winning the same.

Top 10 Current Quarter Opportunities
Time run: 11:33:04 AM

Amount in Millions (USD)

Opportunity	Product	Employee	Revenue Probability	Opportunity Revenue
Secured Loans CRE	B.K. Liebsung	47.33	17,505.77	
University of Buffalo	Subordinated Bonds	Alfred Taylor	29.72	17,139.41
California Builders	Treasury Bonds	George Andy	21.54	17,030.89
U.S. Treasury	Unsecured Bonds	B.K. Liebsung	18.27	16,621.47
Streetsville	Secured Loans CRE	B.K. Liebsung	40.76	16,489.50
New England Association of Colleges & Schools	Secured Loans CRE	A.J.Peter	45.43	16,483.68
Union Computers	Commercial Paper	Thomos Martinez	16.01	16,376.01
Office Group	Treasury Bonds	B.K. Liebsung	24.71	16,219.18
The Brink's Company	Debt Funds	George Andy	40.33	16,172.11
TDK CORPORATION	Equity Funds	George Andy	39.60	16,129.79

Analyze - Edit - Refresh - Print - Export

Figure 71. Top 10 Current Quarter Opportunities

- Top 10 Wins

This report lists the top 10 wins as ranked by Expected Revenue and the Sales Employee associated with the win and the date it was closed.

Top 10 Wins
Time run: 2/5/2015 9:35:06 AM

Time▲▼	Product	Employee	Opportunity Closed Date	Expected Revenue
▶ 2013	Apex Current Account	Fransis Lucid	14-Dec-2009	10.39
	Business Loans	A.J.Peter	21-Jan-2010	2.55
	Government Loans	Thomos Martinez	23-Dec-2009	10.28
		Tom Maddock	15-Jan-2010	6.60
	MF Long Gain	David Thomos	08-Jan-2010	0.93
	Platinum Card	B.K. Liebsung	07-Jan-2010	10.39
	SavingsMax Account	Thomos Martinez	30-Dec-2009	10.25
	Signature Card	A.J.Peter	20-Jan-2010	2.55
	Sweep In Deposits	Mark Anthony	03-Jan-2010	4.88

[Analyze](#) - [Edit](#) - [Refresh](#) - [Print](#) - [Export](#)

Figure 72. Top 10 Wins

- Top 10 Latest Opportunities

This report lists the top 10 latest opportunities as ranked by Revenue.

Top 10 Latest Opportunities
Time run: 2/5/2015 9:35:06 AM

Amount in Millions (USD)

Time▲▼	Opportunity	Product	Sales Stage	Opportunity Revenue
> 2013	Opp 1	Government Loans	Negotiation	6.60
	Opp 12	Loans Against Assets	Short List	5.47
	Opp 16	Senior Citizens Account	Negotiation	2.47
	Opp 18	Plus Current	Initial Discussion	2.58
	Opp 19	Regular Fixed Deposit	Negotiation	1.57
	Opp 22	MF Regular	Short List	1.58
	Opp 24	Institutional Savings	Short List	3.16
	Opp 27	Apex Current Account	Negotiation	2.55
	Opp 4	Signature Card	Negotiation	2.55
	Opp 5	Platinum Plus	Prospect	0.27

[Analyze](#) - [Edit](#) - [Refresh](#) - [Print](#) - [Export](#)

Figure 73. Top 10 Latest Opportunities

- Top 10 Stalled Opportunities

This report lists the top 10 Stalled Opportunities as ranked by Expected Revenue.

Top 10 Stalled Opportunities
Time run: 2/5/2015 9:35:06 AM

Amount in Millions (USD)

Time	Opportunity	Product	Employee	Sales Stage	No. of Days in Stage	Opportunity Revenue
2013	Opp 13	Government Loans	Thomos Martinez	Negotiation	168	10.28
	Opp 14	Platinum Card	Fransis Lucid	Initial Discussion	100	31.59
	Opp 17	Family Savings Group Account	B.K. Liebsung	Selected	84	10.28
	Opp 2	Platinum Card	B.K. Liebsung	Negotiation	112	10.39
	Opp 21	Equi Plus (Ret)	Thomos Martinez	Negotiation	80	10.64
	Opp 25	Salary Accounts	Thomos Martinez	Negotiation	32	10.20
	Opp 29	Platinum Card	B.K. Liebsung	Negotiation	24	19.50
	Opp 4	Signature Card	A.J.Peter	Negotiation	35	2.55
	Opp 6	SavingsMax Account	Thomos Martinez	Negotiation	68	10.25
	Opp 7	Apex Current Account	Fransis Lucid	Negotiation	36	10.39

[Analyze](#) - [Edit](#) - [Refresh](#) - [Print](#) - [Export](#)

Figure 74. Top 10 Stalled Opportunities

- Top 10 Strategic Opportunities

This report lists the top 10 Strategic Opportunities as ranked by Expected Revenue.

Top 10 Strategic Opportunities
Time run: 2/5/2015 9:35:06 AM

Amount in Millions (USD)

Time	Opportunity	Product	Employee	Sales Stage	Opportunity Revenue
2013	Opp 1	Government Loans	Tom Maddock	Negotiation	6.60
	Opp 13	Government Loans	Thomos Martinez	Negotiation	10.28
	Opp 14	Platinum Card	Fransis Lucid	Initial Discussion	31.59
	Opp 17	Family Savings Group Account	B.K. Liebsung	Selected	10.28
	Opp 2	Platinum Card	B.K. Liebsung	Negotiation	10.39
	Opp 21	Equi Plus (Ret)	Thomos Martinez	Negotiation	10.64
	Opp 25	Salary Accounts	Thomos Martinez	Negotiation	10.20
	Opp 29	Platinum Card	B.K. Liebsung	Negotiation	19.50
	Opp 6	SavingsMax Account	Thomos Martinez	Negotiation	10.25
	Opp 7	Apex Current Account	Fransis Lucid	Negotiation	10.39

[Analyze](#) - [Edit](#) - [Refresh](#) - [Print](#) - [Export](#)

Figure 75. Top 10 Strategic Opportunities

- Top 10 Opportunities - Existing Customers

This report identifies the opportunities that are being worked on with existing customers as ranked by Expected Revenue.

Top 10 Opportunities - Existing Customers					
Time run: 10/20/2015 3:01:46 PM					
Amount in Millions (USD)					
Opportunity	Product	Customer Name	Opportunity Status	Expected Revenue	Income Generated YTD
Opp 14	Platinum Card	Power Finance Corporation Pvt Ltd	OPEN	23.69	0.00
Opp 12	Loans Against Assets	MRF Ltd	OPEN	5.47	0.00
Opp 24	Institutional Savings	Konkan Railway Corporation Pvt Ltd	OPEN	3.16	0.00
Opp 5	Platinum Plus	MRF Ltd	OPEN	0.27	0.00

[Analyze](#) - [Edit](#) - [Refresh](#) - [Print](#) - [Export](#)

Figure 76. Top 10 Opportunities - Existing Customers

- Top 10 Opportunities by Opportunity Revenue

This report displays the top 10 opportunities as ranked by Expected Revenue.

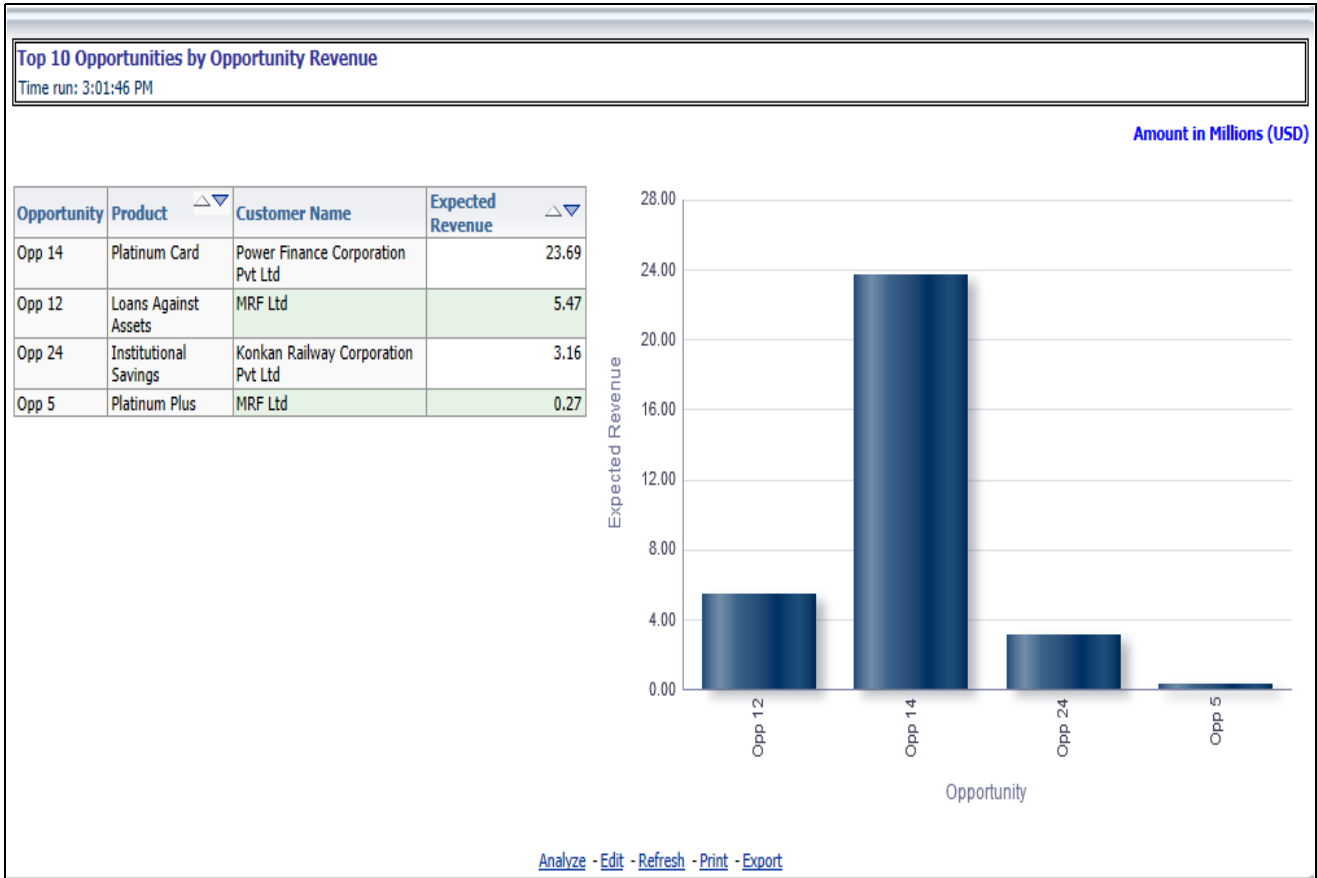


Figure 77. Top 10 Opportunities by Opportunity Revenue

Opportunities

- Opportunities by LOB

This report shows the number of current opportunities across the various lines of business.

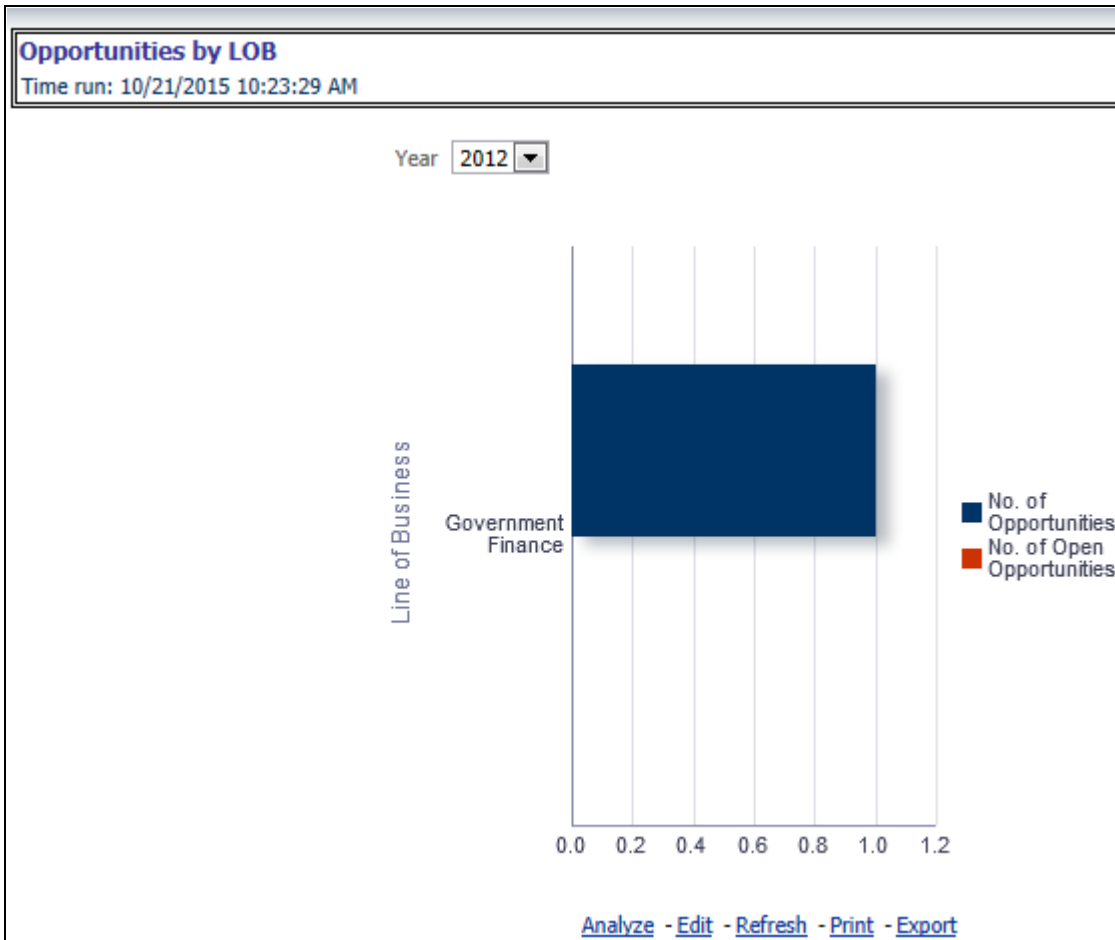


Figure 78. Opportunities by LOB

- Opportunities by History

This report displays the time series outlining the growth of opportunities and growth in number of customers across the same time period.

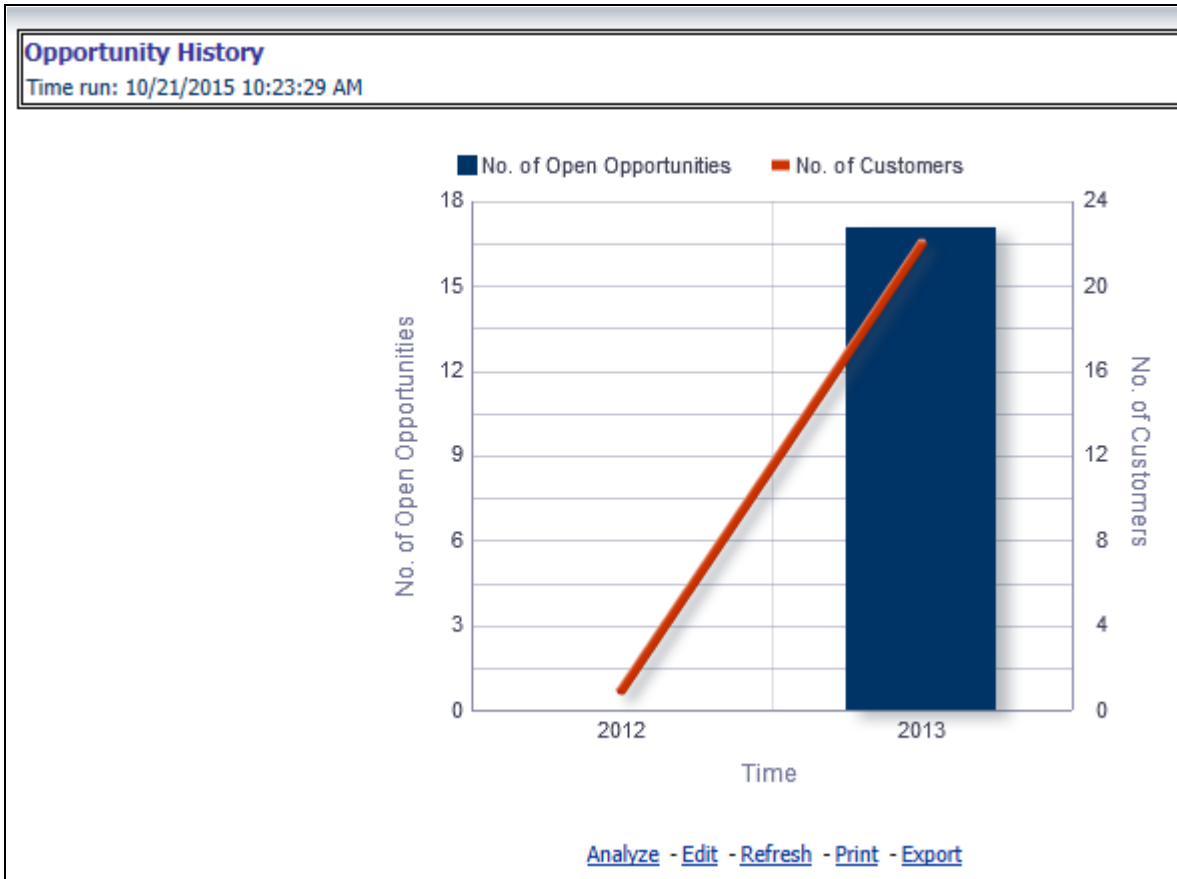


Figure 79. Opportunities by History

- Average day at Sales Stage

This report displays the average number of days an opportunity stays in any stage of the sales cycle witnessed in every stage.

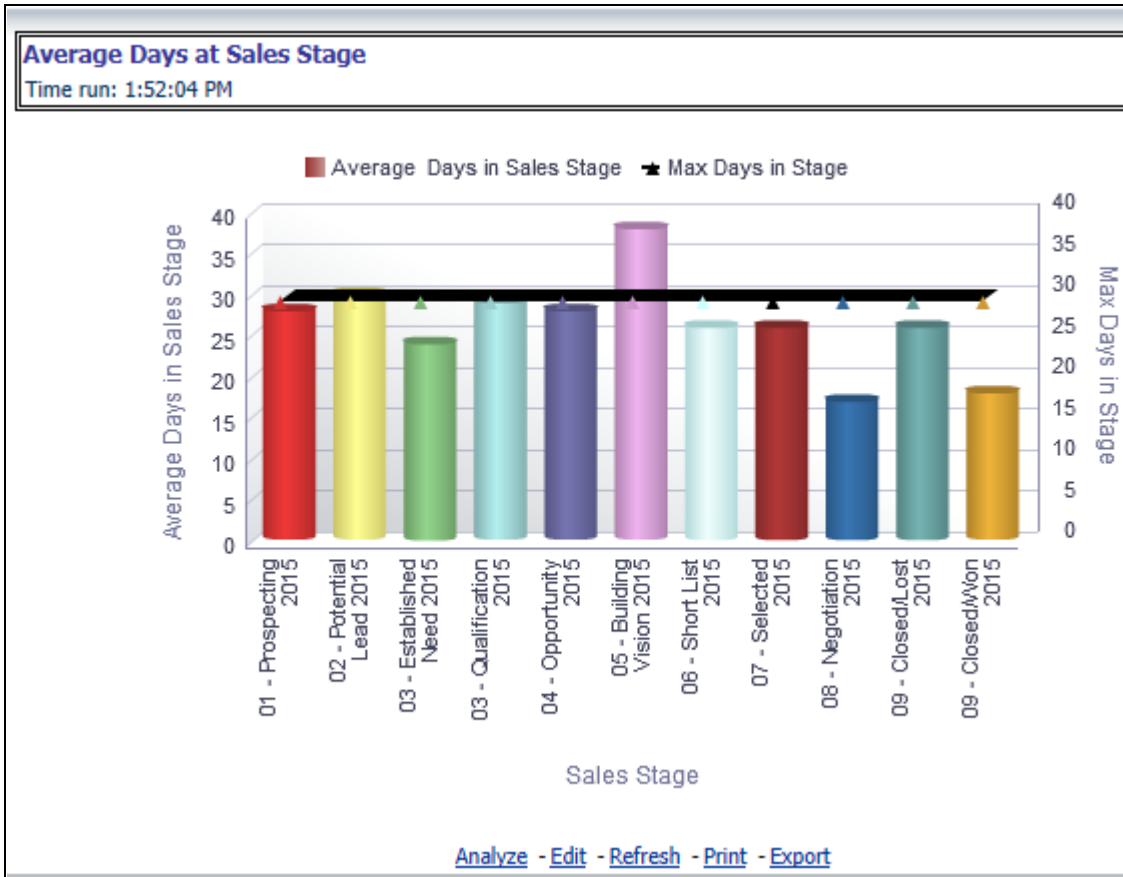


Figure 80. Average day at Sales Stage

- Pipeline by Open Mouth

This report displays the expected revenue corresponding to open opportunities over time.

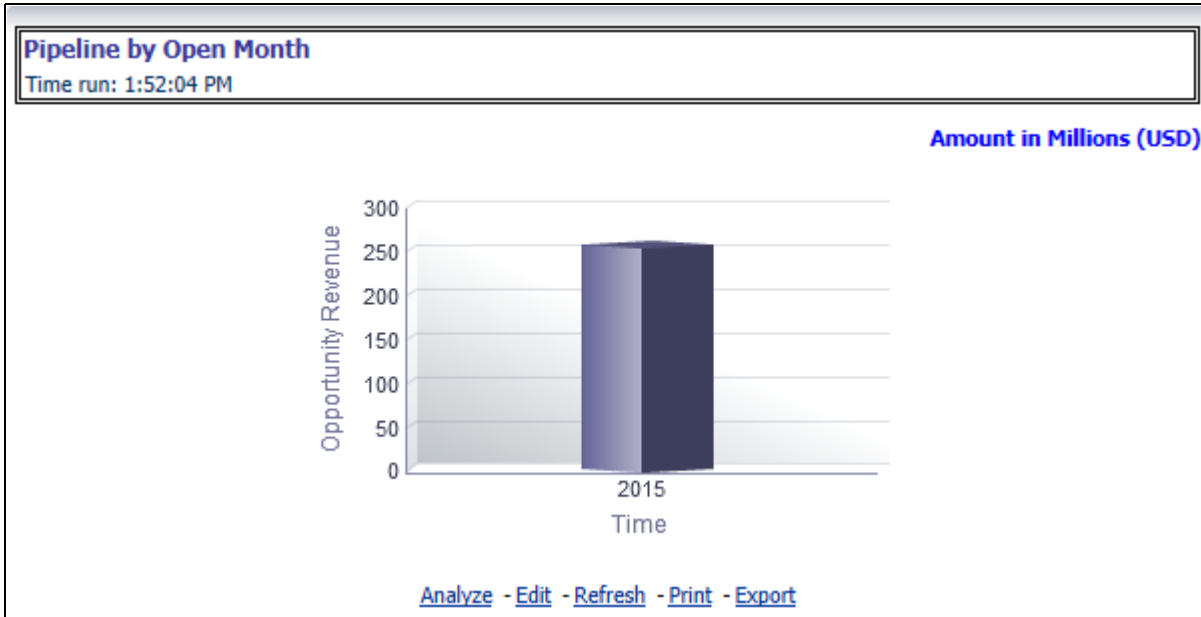


Figure 81. Pipeline by Open Mouth

- Pipeline Revenue by Sales Stage

This report displays the distribution of expected revenue corresponding to each sales stage over time.

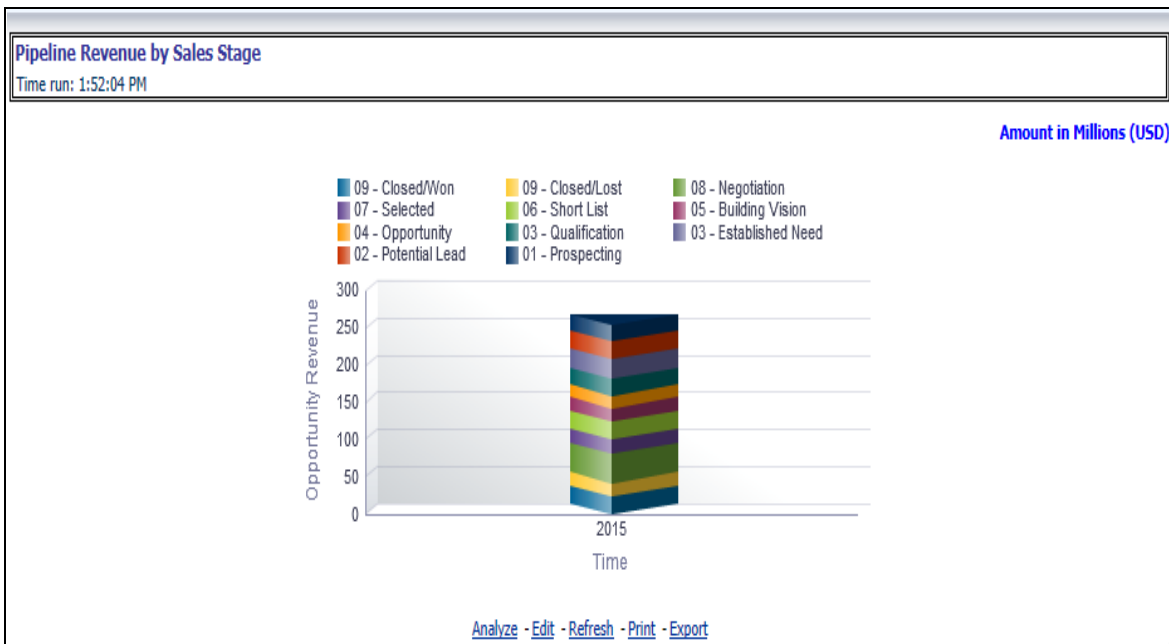


Figure 82. Pipeline Revenue by Sales Stage

- Opportunity Distribution by Industry

This report shows the distribution of Open Opportunities across various Industry verticals they belong to.

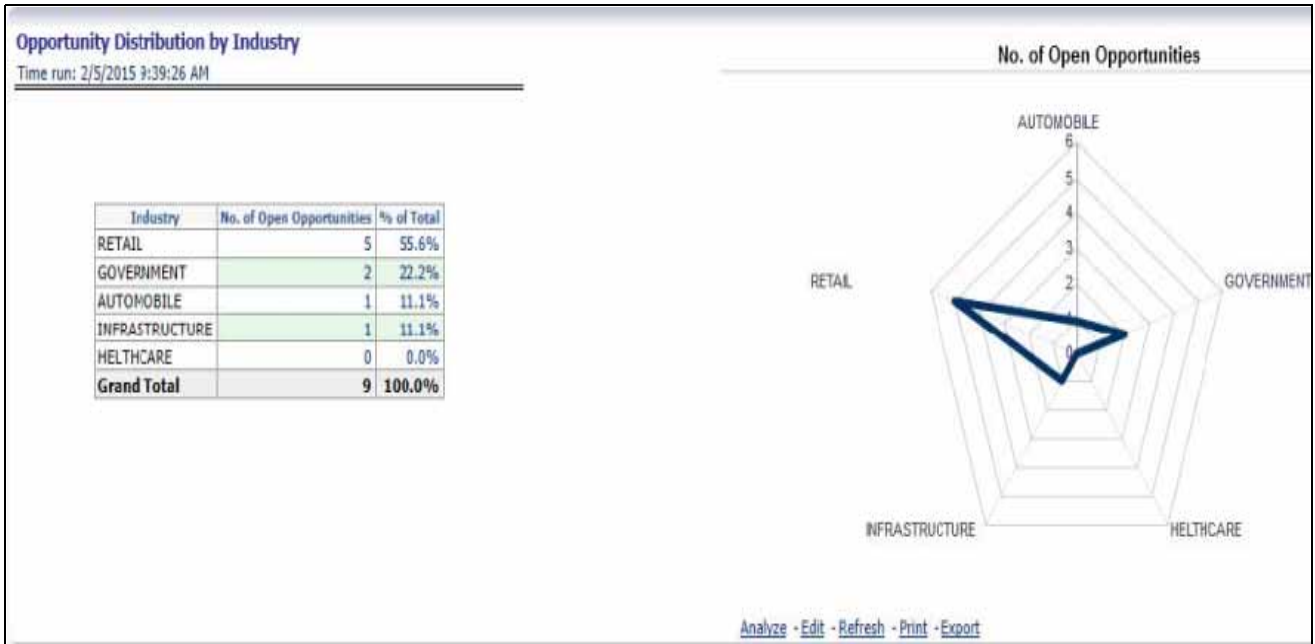


Figure 83. Opportunity Distribution by Industry

- Opportunities by Region

This report displays the opportunities along with the corresponding regions.

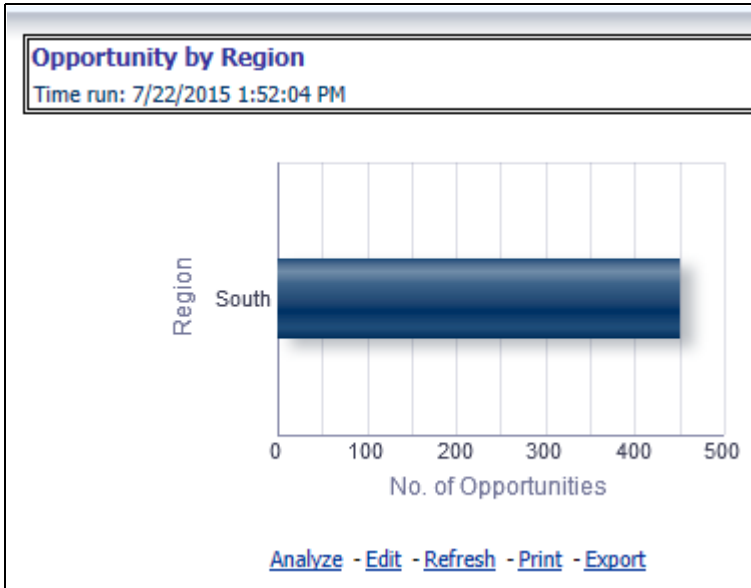


Figure 84. Opportunities by Region

- No. of Opportunities with Wins

This report displays the Number of Open Opportunities and corresponding wins in the current period.

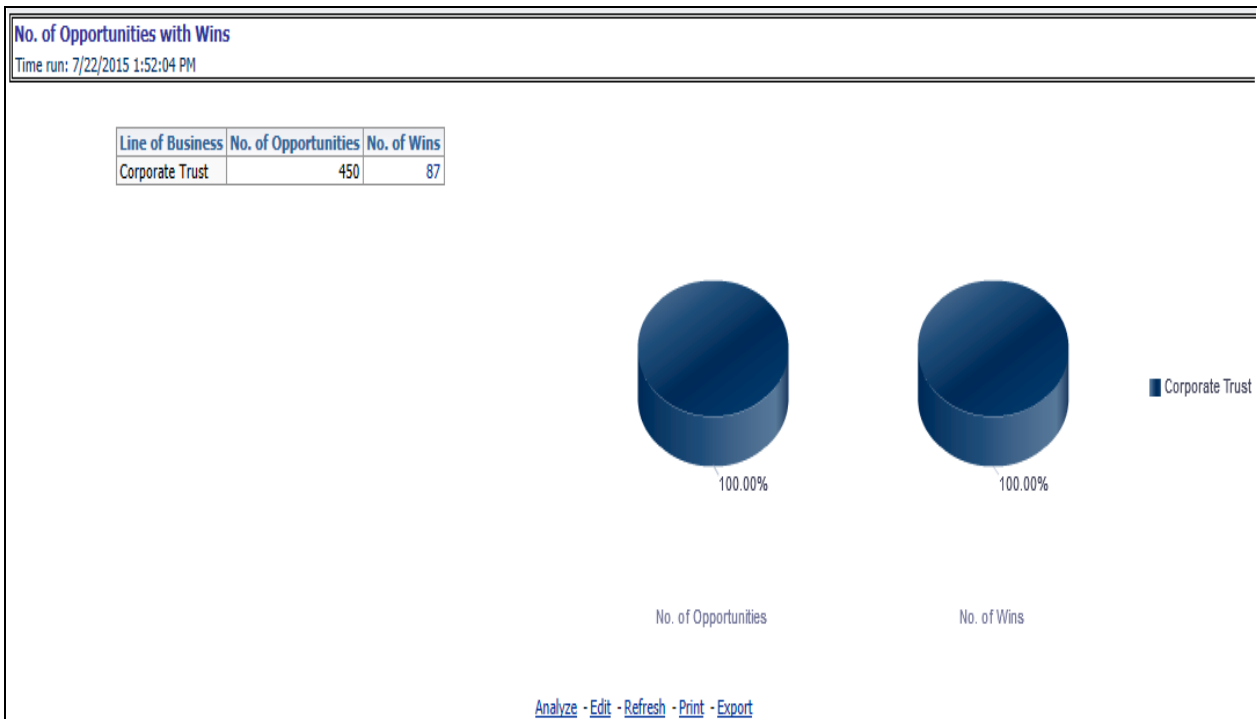


Figure 85. No. of Opportunities with Wins

Activities

- Activity Distribution

This report displays the number of activities across various activity priorities distributed by the Product or Activity Type.

Activity Distribution		
Time run: 7/22/2015 2:03:32 PM		
Distribution by : Product ▼		
Activity Priority Code High ▼		
	▶ 2015	
Product	No. of Activities	% of Total
Asset sale with recourse1	3	0.5%
Bank Notes and Coins1	8	1.3%
Bid bonds1	2	0.3%
Branded Cards1	5	0.8%
Cheques and transit items1	6	1.0%
Collateralised Mortgage Obligations1	8	1.3%
Commercial Paper1	2	0.3%
Commercial term loans1	4	0.7%
Commodity Finance1	5	0.8%
Conditional take-out finance1	9	1.5%
Consumer Credit1	3	0.5%
Convertible Bonds1	3	0.5%
Corporate Bonds1	6	1.0%
Credit Card ABS1	4	0.7%
Credit Card Outstanding1	2	0.3%

Rows 1 - 15
[Analyze](#) - [Edit](#) - [Refresh](#) - [Print](#) - [Export](#)

Figure 86. Activity Distribution

- Opportunities with Activities

This report lists the number of opportunities that have an outstanding activity.



Figure 87. Opportunities with Activities

- Top 5 Opportunities by No. of Activities

This report lists the top 5 opportunities that have the most outstanding activities. This identifies opportunities with the most activity.

Top 5 Opportunities by No. of Activities
Time run: 2/5/2015 9:42:47 AM

Time	Opportunity	No. of Activities	No. of Open Activities	Activity Completion Rate %
2013	Opp 1	1	0	100.0000%
	Opp 10	1	0	100.0000%
	Opp 11	1	0	100.0000%
	Opp 12	1	0	100.0000%
	Opp 13	1	0	100.0000%
	Opp 14	1	1	0.0000%
	Opp 15	1	0	100.0000%
	Opp 16	1	0	100.0000%
	Opp 17	1	1	0.0000%
	Opp 18	1	0	100.0000%
	Opp 19	1	0	100.0000%
	Opp 2	1	0	100.0000%
	Opp 20	1	0	100.0000%
	Opp 21	1	1	0.0000%
	Opp 22	1	0	100.0000%

Rows 1 - 15
Analyze - Edit - Refresh - Print - Export

Figure 88. Top 5 Opportunities by No. of Activities

- Bottom 5 Opportunities by No. of Activities

This report lists the number of opportunities with the least number of activities.

Bottom 5 Opportunities by No. of Activities
Time run: 2/5/2015 9:42:47 AM

Time▲	Opportunity	No. of Act.▲	No. of Open Activites	Activity Completion Rate %
▶ 2013	Opp 1	1	0	100.0000%
	Opp 10	1	0	100.0000%
	Opp 11	1	0	100.0000%
	Opp 12	1	0	100.0000%
	Opp 13	1	0	100.0000%
	Opp 14	1	1	0.0000%
	Opp 15	1	0	100.0000%
	Opp 16	1	0	100.0000%
	Opp 17	1	1	0.0000%
	Opp 18	1	0	100.0000%
	Opp 19	1	0	100.0000%
	Opp 2	1	0	100.0000%
	Opp 20	1	0	100.0000%
	Opp 21	1	1	0.0000%
	Opp 22	1	0	100.0000%

Rows 1 - 15
[Analyze](#) - [Edit](#) - [Refresh](#) - [Print](#) - [Export](#)

Figure 89. Bottom 5 Opportunities by No. of Activities

- Balance Sheet

This report displays the balance sheet details about a selected customer.

Balance Sheet
Time run: 2/5/2015 4:58:10 PM

Amount in Millions (USD)

Reporting Line Hierarchy	▶ 2013
▽ Balance Sheet	900.43
▽ Cash	631.87
Balances with Central Bank	631.87
▶ Trading Assets	(807.80)
▶ Investments	(631.87)
▶ Total Liabilities '&' Shareholders Equity	268.56

[Analyze](#) - [Edit](#) - [Refresh](#) - [Print](#) - [Export](#)

Figure 90. Balance Sheet

- Risk Adjusted Performance Metrics

This report helps you to determine the ratio of risk-adjusted Net Income against the Economic Capital. This metric is also called Risk Adjusted Return On Capital (RAROC). It helps in determining the efficiency of Economic Capital corresponding to every customer.

Risk Adjusted Performance Metrics		
Time run: 7/22/2015 2:09:25 PM		
		2015
APPLE ELECTRICALS	Net Income	(4,779,276)
	Economic Capital	0
	RAROC- Economic Capital	
APPLE HARDWARE	Net Income	(5,374,053)
	Economic Capital	0
	RAROC- Economic Capital	
APPLE SOFTWARE	Net Income	(5,747,761)
	Economic Capital	0
	RAROC- Economic Capital	
▷ BAJAJ INDUSTRIES	Net Income	(5,248,784)
	Economic Capital	0
	RAROC- Economic Capital	
▷ ORACLE CORP	Net Income	(4,470,987)
	Economic Capital	0
	RAROC- Economic Capital	


 Rows 1 - 15
[Analyze](#) - [Edit](#) - [Refresh](#) - [Print](#) - [Export](#)

Figure 92. Risk Adjusted Performance Metrics

- Balance Sheet

This report displays the balance sheet details about a selected customer.

Balance Sheet
Time run: 2/8/2015 2:41:49 PM

Amount in USD

		Balance Sheet		
			> Trading Assets	> Total Liabilities '&' Shareholders Equity
> Bajaj Group	> 2011			
	> 2012			
	> 2013	2,998,381	(898,943)	3,897,324
> Reliance	> 2011			
	> 2012			
	> 2013			

[Analyze](#) - [Edit](#) - [Refresh](#) - [Print](#) - [Export](#)

Figure 93. Balance Sheet

Product Performance

- Profit and Loss Summary

This report displays a profit and loss summary for a selected product for a certain time period.

Profit and Loss Summary
Time run: 7/22/2015 2:13:02 PM

Amount in Millions (USD)

Analyze by

	> 2015
	Movement (Contributed)
> Net Income Before Taxes	(2.33)
> Income before Taxes	(2.33)
> Total Revenue	(2.33)
Number of Customers	213.00
Number of Accounts	213.00
Number of Open Accounts	205.00

[Analyze](#) - [Edit](#) - [Refresh](#) - [Print](#) - [Export](#)

Figure 94. Profit and Loss Summary

- Profit and Loss - Scenario Comparison

This report provides the profit and loss details by comparing various scenarios for a selected product.

Profit & Loss - Scenario Comparison
Time run: 7/22/2015 2:13:02 PM

Amount in Millions (USD)

	Actual		Scenario		YTD (B/W) (B/W) % FULL YEAR	YTD Actuals % FY Scenario	
	Mar-2015	YTD Actual	YTD (B/W)	(B/W) % Scenario			
∇ Net Income Before Taxes	(12.89)	(12.89)	(1.26)	(11.63)	922.33	(1.56)	824.21
∇ Income before Taxes	(12.89)	(12.89)	(1.26)	(11.63)	922.33	(1.56)	824.21
∇ Total Revenue	(12.70)	(12.70)	(1.25)	(11.45)	919.92	(1.54)	825.95
▷ Net Interest Income	(12.70)	(12.70)	(1.25)	(11.45)	919.92	(1.54)	825.95
▷ Net Credit Losses	0.19	0.19	0.02	0.17	1115.37	0.03	722.07

[Analyze](#) - [Edit](#) - [Refresh](#) - [Print](#) - [Export](#)

Figure 95. Profit and Loss - Scenario Comparison

Line of Business Performance

- Profit and Loss Summary

This report displays a profit and loss summary for a selected Line of Business.

Profit and Loss Summary
Time run: 7/22/2015 2:13:02 PM

Amount in Millions (USD)

Analyze by:

	▷ 2015
	Movement (Contributed)
∇ Net Income Before Taxes	(2.33)
∇ Income before Taxes	(2.33)
▷ Total Revenue	(2.33)
Number of Customers	213.00
Number of Accounts	213.00
Number of Open Accounts	205.00

[Analyze](#) - [Edit](#) - [Refresh](#) - [Print](#) - [Export](#)

Figure 96. Profit and Loss Summary

- Profit and Loss - Scenario Comparison

This report provides the profit and loss details by comparing various scenarios for a selected Line of Business.

Profit & Loss - Scenario Comparison
Time run: 7/22/2015 2:13:02 PM

Amount in Millions (USD)

	Actual		Scenario				
	Mar-2015	YTD Actual	YTD (B/W)	(B/W) %	FULL YEAR	YTD Actuals %	FY Scenario
∇ Net Income Before Taxes	(12.89)	(12.89)	(1.26)	(11.63)	922.33	(1.56)	824.21
∇ Income before Taxes	(12.89)	(12.89)	(1.26)	(11.63)	922.33	(1.56)	824.21
∇ Total Revenue	(12.70)	(12.70)	(1.25)	(11.45)	919.92	(1.54)	825.95
▷ Net Interest Income	(12.70)	(12.70)	(1.25)	(11.45)	919.92	(1.54)	825.95
▷ Net Credit Losses	0.19	0.19	0.02	0.17	1115.37	0.03	722.07

[Analyze](#) - [Edit](#) - [Refresh](#) - [Print](#) - [Export](#)

Figure 97. Profit and Loss - Scenario Comparison

- Cross-sell Performance

This report outlines the performance of the Open Customers along with the associated products for a specific Line of Business.

Cross-sell Performance
Time run: 7/22/2015 2:21:08 PM

Analyze by

Amount in Millions (USD)

Product	No. of Open Customers
Corporate Banking	
Apex Current Account	1
Gold Card	4
Institutional Savings	3
Mortgage Plus	26
Platinum Card	5
Platinum Plus	7
Salary Accounts	7
SavingsMax Account	2
Signature Card	5
Supreme Current Account	5

[Analyze](#) - [Edit](#) - [Refresh](#) - [Print](#) - [Export](#)

Figure 98. Cross-sell Performance

- Cross-sell Over Time

This report displays the time series outlining the growth of opportunities and growth in number of customers for a specific Line of Business across the same time period.



Figure 99. Cross-sell Over Time

Balance Sheet

This report displays the balance sheet details about a Line of Business.

Balance Sheet	
Time run: 2/5/2015 4:58:10 PM	
Amount in Millions (USD)	
Reporting Line Hierarchy	▷ 2013
▽ Balance Sheet	900.43
▽ Cash	631.87
Balances with Central Bank	631.87
▷ Trading Assets	(807.80)
▷ Investments	(631.87)
▷ Total Liabilities '&' Shareholders Equity	268.56
Analyze - Edit - Refresh - Print - Export	

Figure 100. Balance Sheet

Relationship Manager Performance

- Relationship Manager - Profit and Loss Summary

The Relationship Manager provides the profit and loss details.

Relationship Manager - Profit and Loss Summary		
Time run: 2/5/2015 9:50:59 AM		
Amount in USD		
Reporting Line Hierarchy	▷ 2012	▷ 2013
▽ Net Income Before Taxes		(784,141.50)
▽ Operating Income before Taxes		(784,141.50)
▷ Net Credit Losses		784,141.50
Analyze - Edit - Refresh - Print - Export		

Figure 101. Relationship Manager - Profit and Loss Summary

- Relationship Manager Portfolio

This report displays the various assets of a Relationship Manager.

Relationship Manager Portfolio						
Time run: 3/19/2014 9:18:30 AM						
						Amount in USD
ROBERT QUINLAN						
Customer Name	Product	Account ID	Percentage Contribution	Primary Officer (Y/N)	Total Revenue	Contributed Revenue
Compagnie GÃfÂ©n. des Ãfâ€tab. Michelin	Equity Funds	INEU30690	60%	Y	42.31	25.39
Analyze - Edit - Refresh - Print - Export						

Figure 102. Relationship Manager Portfolio

- Relationship Manager Organization Performance

The Relationship Manager analyzes the performance of the Organization.

Relationship Manager Org Performance								
Time run: 2/8/2015 2:54:29 PM								
								Amount in USD
Relationship Manager	Product	Customer	Primary Officer Flag	Total Revenue	Percentage Contribution	Indirect Revenue	Direct Contribution	Overall Revenue Contribution
USHA SHETTY	Annuity Plus	Reliance Ltd	Y	521,804.47	100	521,804.47	0.00	521,804.47
		Reliance Telecom Ltd	Y	1,390,114.56	100	1,390,114.56	0.00	1,390,114.56
	Equity Plus	Infosys Pvt Ltd	Y		100	0.00	0.00	
	Institutional Savings	Reliance Ltd	Y	0.00	100	0.00	0.00	0.00
		Reliance Ltd	Y	0.00	100	0.00	0.00	0.00
		Reliance Telecom Ltd	Y	0.00	100	0.00	0.00	0.00
	Leases	Infosys Pvt Ltd	Y	906,756.74	100	906,756.74	0.00	906,756.74
		Cognizant Pvt Ltd	N	59,941.76	100	59,941.76	0.00	59,941.76
			Y	281,573.53	100	281,573.53	0.00	281,573.53
	Other Contracts	Reliance Ltd	Y		100	0.00	0.00	
		Reliance Energy Ltd	Y	0.00	100	0.00	0.00	0.00
		Reliance Energy Ltd	Y		100	0.00	0.00	
		Cognizant Pvt Ltd	N	7,279.33	100	7,279.33	0.00	7,279.33
			Y	7,938.54	100	7,938.54	0.00	7,938.54
		Reliance Capital Ltd	Y	0.00	100	0.00	0.00	0.00
		Reliance Capital Ltd	Y		100	0.00	0.00	
	Salary Accounts	Reliance Energy Ltd	Y	0.00	100	0.00	0.00	0.00
		Reliance Capital Ltd	Y	0.00	100	0.00	0.00	0.00
	Signature Card	Reliance Ltd	Y	935,838.80	100	935,838.80	0.00	935,838.80
		Reliance Capital Ltd	Y	805,955.82	100	805,955.82	0.00	805,955.82

[Analyze](#) - [Edit](#) - [Refresh](#) - [Print](#) - [Export](#)

Figure 103. Relationship Manager Organization Performance

- Cross-sell Performance

The Relationship Manager reports the performance of the Open Customers along with the associated products for a specific Line of Business.

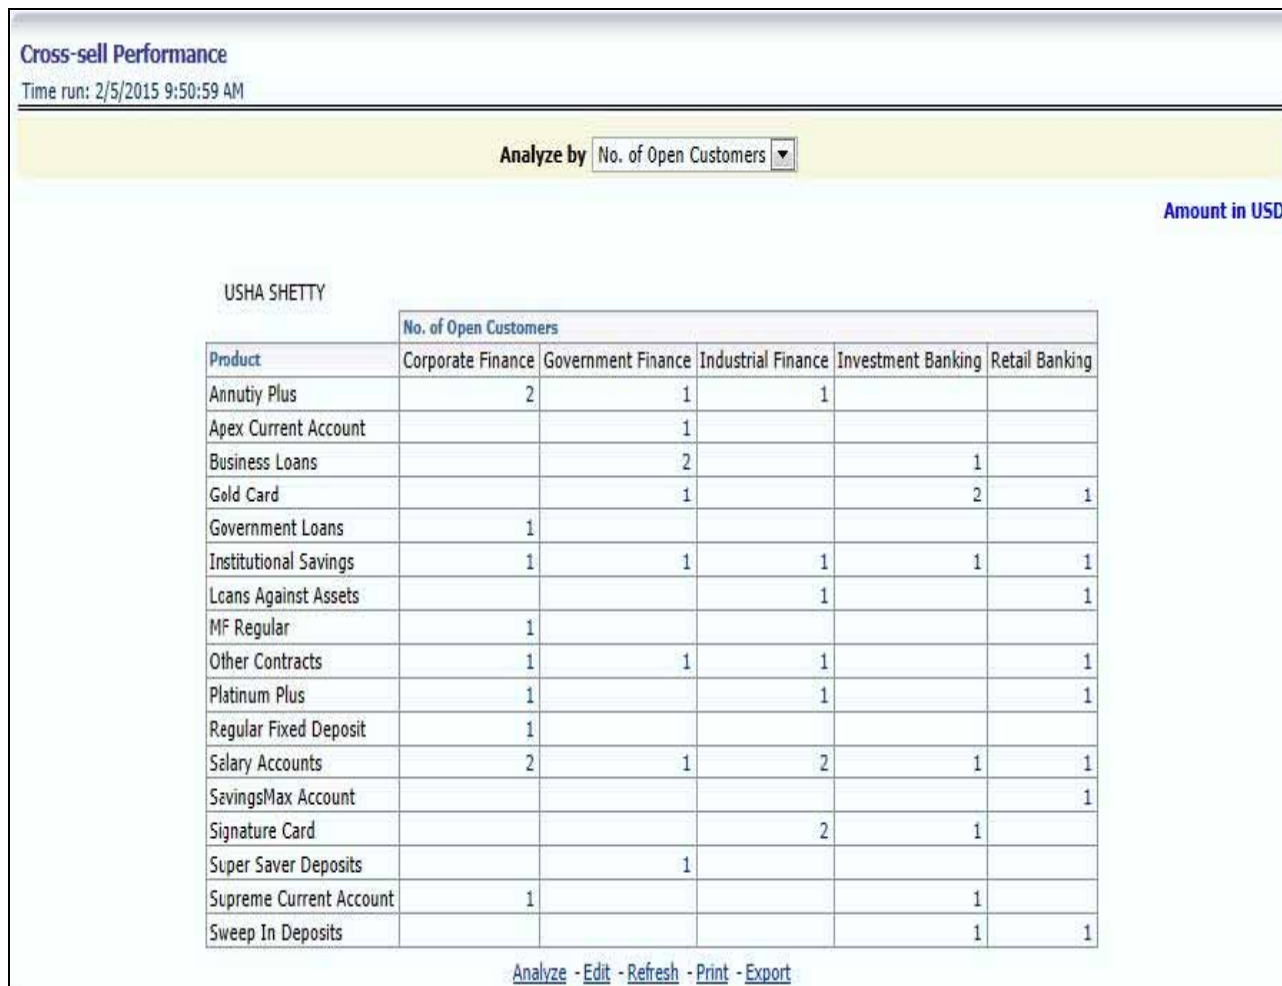


Figure 104. Cross-sell Performance

- Cross-sell over Time

The Relationship Manager reports the growth of opportunities and growth in number of customers for a specific Line of Business across the same time period.



Figure 105. Cross-sell over Time

Customer Central

The purpose of this tab is to provide detailed information about the customer. It enables the user to analyze a customer in its entirety. The report is specific to a customer and the selection of customer for which the report is to be viewed is done through the dashboard prompt. The search is enabled either by customer name or customer ID.

This tab provides complete demographic details of the customer as well as the engagements of the customer with the bank. The engagement with the bank is specified in terms of the accounts held by the customer as well as the other services/activities through which the customer interacts with the bank.

All accounts of the customer (current as well as previous) are reported along with their specifics such as the start date, balance, peak balances, net income, relationship manager, etc. Other reports include the specifics of the subscriptions & enrollments of the customer and the various offers that are provided to the customer and the accounts to which those offers have been provided. It also displays the details of transactions of the customer which can be viewed by classification into monetary or non-monetary transactions. Any predictive modeling scores that have been computed or are available for the customer are also reported.

Based on the profitability of the accounts, the future behavior of accounts is predicted and this predicted value is used to compute 'Customer Life-Time Value (CLTV)'. The CLTV can be analyzed for different periods of projections and accordingly the projected data to be considered for reporting CLTV is selected.

Various reports available under this tab are discussed in the following sections:

- Customer Summary

This report details the industry in which the customer operates and its geographic spread.

Customer Summary
Time run: 10/26/2015 2:22:05 PM


Amount in Millions (USD)

Customer Name	Industry Type	Geographic Spread
Reliance Ltd	Infrastructure	North
Reliance Energy Ltd	Infrastructure	North
Reliance Telecom Ltd	Other Industries	West
Reliance Capital Ltd	Finance	East

[Analyze](#) - [Edit](#) - [Refresh](#) - [Print](#) - [Export](#)

- Customer Asset Size

This report provides a comparison between the customer and the customer group in terms of revenue and total assets.

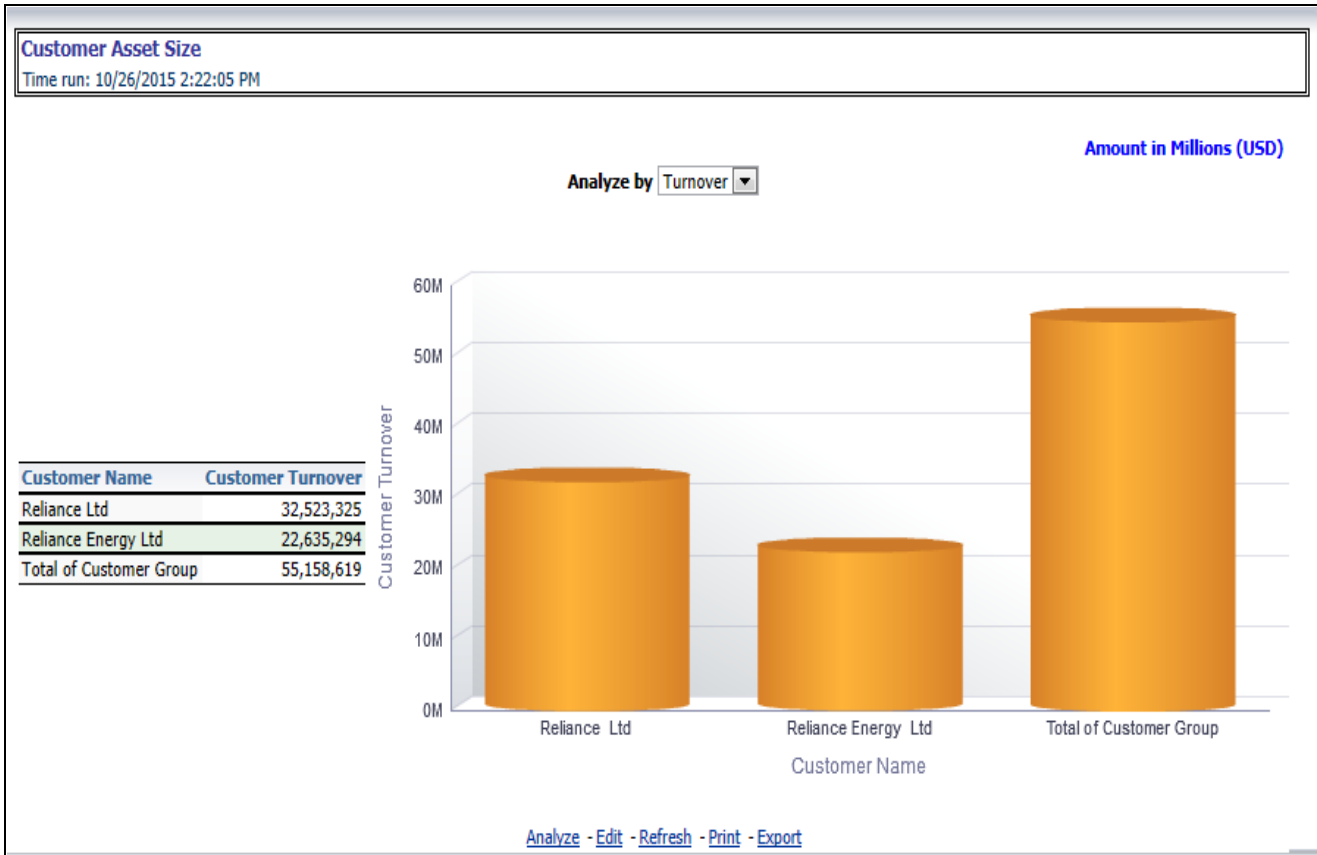

- Customer Group Summary

This report provides details about the entire customer group in terms of geographic spread, revenue or entities and the income generated by bank through the customer group.

Customer Group Summary
This report indicates the geographic spread of the customer group and the number of entities within the group in a geographic area.
Time run: 10/26/2015 2:22:06 PM

Group Name	Geographic Spread	Number of Entities
Reliance Ltd	East	2
	North	5
	West	3
Grand Total		10

[Analyze](#) - [Edit](#) - [Refresh](#) - [Print](#) - [Export](#)

Customer Group Summary		
Time run: 10/26/2015 2:22:06 PM		
Amount in Millions (USD)		
Group Name	Total Turnover	Revenue from Customer
Reliance Ltd	43.84	(3.19)
Analyze - Edit - Refresh - Print - Export		

- Account Management

This report highlights the engagement of customers in terms of products held by them and the RM and account officer details for the respective accounts.

Account Management					
Time run: 10/26/2015 2:22:06 PM					
Account Number	Product	Balances	Primary RM	Client Contact	Designation
OBIB1C1A1	Annuity Plus	922,693,435	FINO PAUL	Peterx king	CFO
OBIB1C1A2	Other Contracts	201,464,580	FINO PAUL	Peterx king	CFO
OBIB1C1A3	Signature Card		FINO PAUL	Peterx king	CFO
OBIB1C1A4	Institutional Savings		FINO PAUL	Peterx king	CFO
OBIB1C1A5	Institutional Savings		FINO PAUL	Peterx king	CFO
Analyze - Edit - Refresh - Print - Export					

- Key Drivers

Key Drivers	
Time run: 10/26/2015 2:22:06 PM	
Amount in Millions (USD)	
Particulars	Amount
Asset Balance	173.00
Liability Balance	1124.16
Income From Fee Based Products	9.67
Analyze - Edit - Refresh - Print - Export	

This report shows the key points highlighting the relationship depth of customer with the bank.

- Holding Summary

This report provides details of the accounts held by the customer and specifies different measures of those accounts.

Holding Summary
Time run: 10/26/2015 2:22:06 PM

Amount in USD

Analyze by


Product Type	Product Name	Account Number	Member Since	Relationship Manager Code	End-of Period Balance	Net Revenue	Net Income	Account Status	Total Revenue	Net Credit Loss	Total Expenses	Average Balance
CARDS	Signature Card	OBIB1C1A3	01-Jun-11	FIPA	14,416,444	18,392			18,392	50,525		14,416,444
RB	Institutional Savings	OBIB1C1A4	01-Jun-11	FIPA	4,517,352	-309,506			-309,506			4,517,352
		OBIB1C1A5	01-Jun-11	FIPA	775,162	-512,573			-512,573			775,162

[Analyze](#) - [Edit](#) - [Refresh](#) - [Print](#) - [Export](#)

Other Performance Metrics

This tab contains the margin report details.

Margin report tracks the margin of profitability that has been achieved by the customer over a period of time.

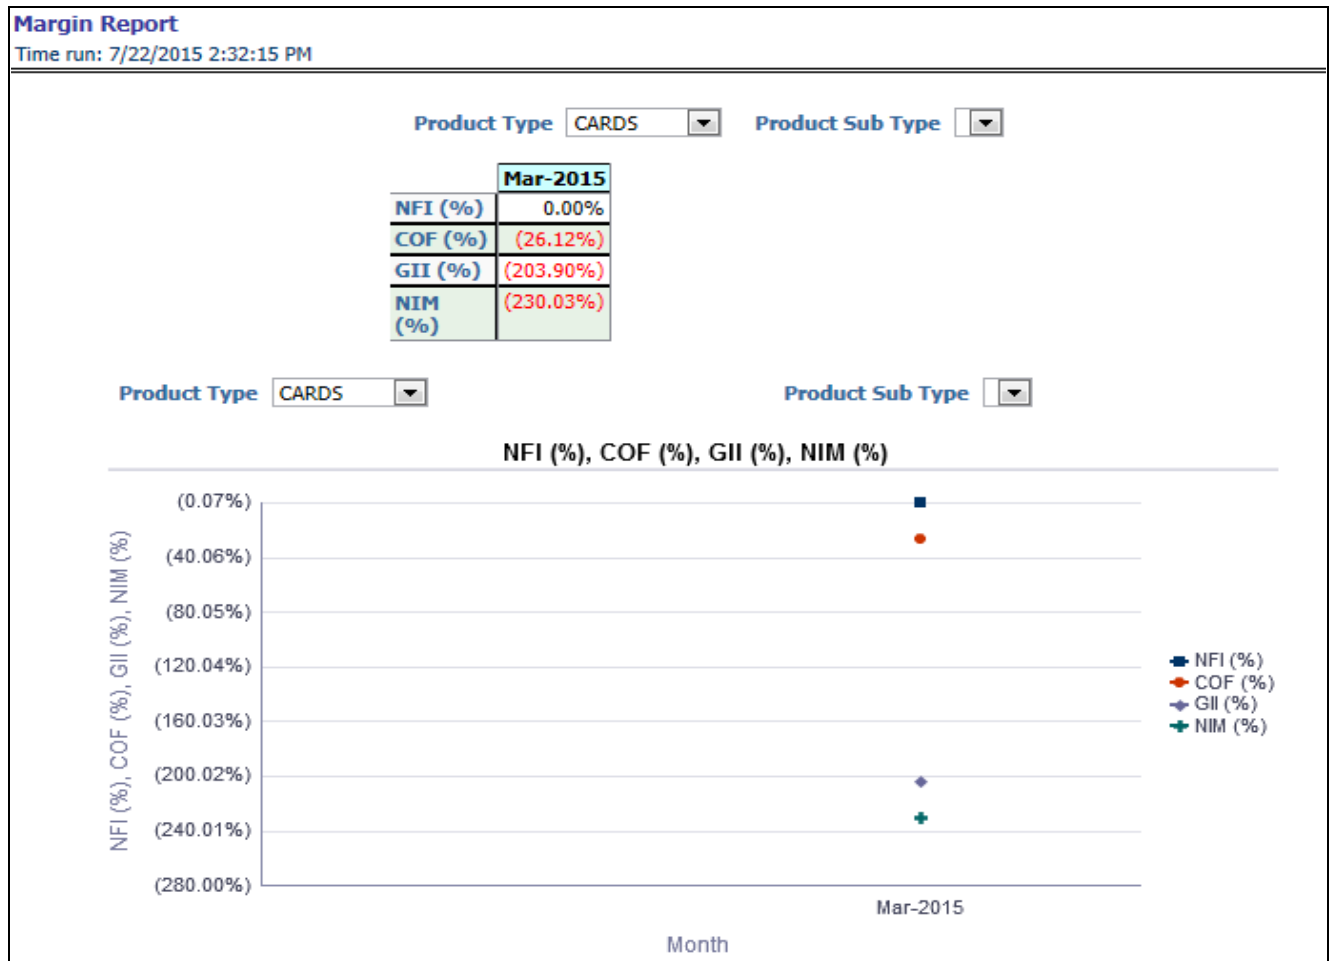

Margin Report
 Time run: 7/22/2015 2:32:15 PM



Product Type	Product Sub Type	NFI (%)	COF (%)	GII (%)	NIM (%)
CARDS		0.00%	(26.12%)	(203.90%)	(230.03%)
CASA		0.00%	(15.65%)	(132.43%)	(148.08%)
MORTGAGE		0.00%	(14.37%)	(499.90%)	(514.27%)

[Analyze](#) - [Edit](#) - [Refresh](#) - [Print](#) - [Export](#)

Figure 106. Margin Report

What-If Analysis

This report enables the user to account for the change in profitability owing to any probable changes in the projected components of profitability.

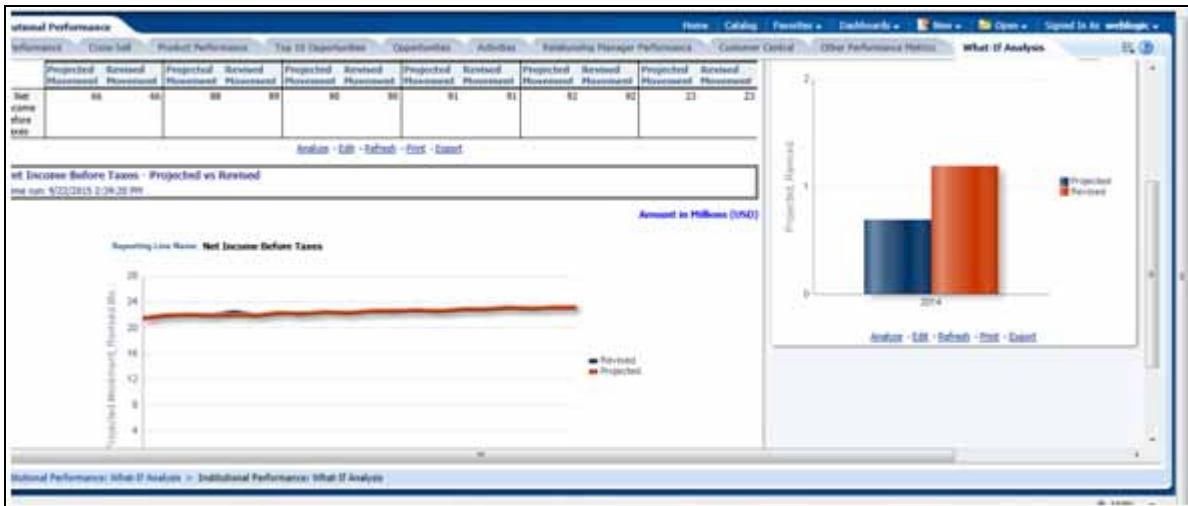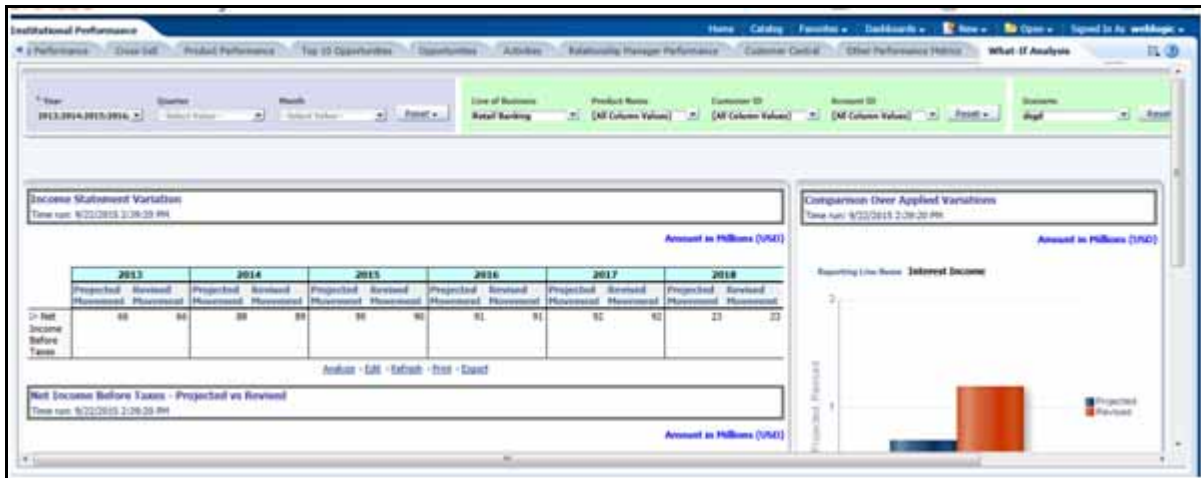

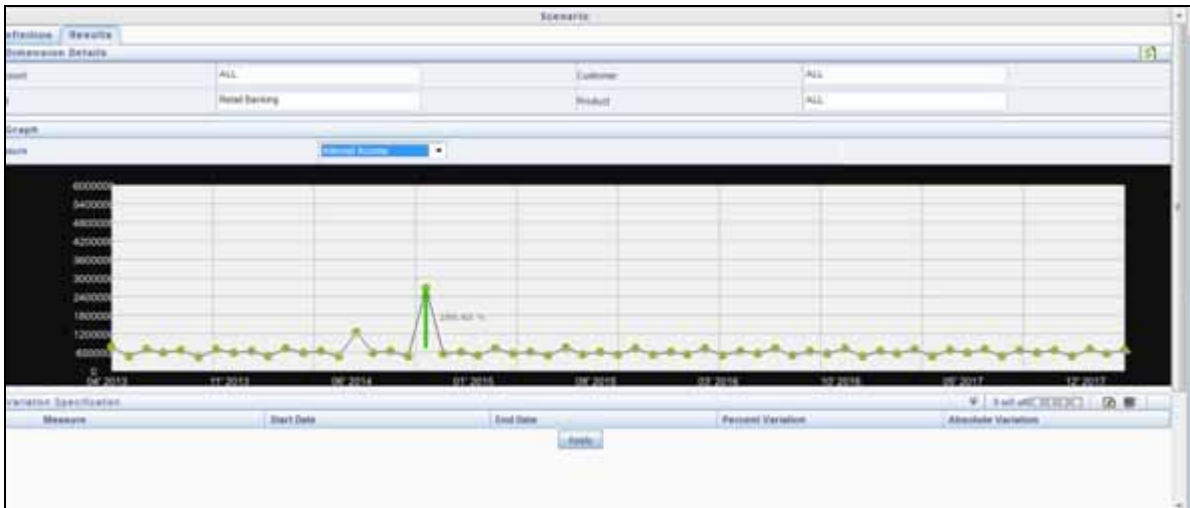


Figure 107. What-If Analysis

This chapter discusses the following topics:

- [Introduction](#)
- [Configurations for What-If Analysis](#)
- [What-If Analysis Limitation](#)

Introduction

This report enables the user to account for the change in profitability owing to any probable changes in the projected components of profitability. The probable change can be defined by the user and is termed as 'Variation'. User could define the parameters to which variation is being applied and the magnitude of variation. The net effect on profitability as a result of these variations can be applied.




The effect of variations on profitability can be analyzed at differing levels of granularity like enterprise, LOB, Product, Customer, and Account. This selection is enabled to the user through dashboard prompt selections. The projected data of income statement is available at an account level. Aggregations are done based on the desired level of granularity. The projections are created based on historical data of account.

User could define the variations through the UI, which when imposed on the income statement provide the resulting net income. The resulting income statement post applying the variations is called as a 'Scenario'. The projections are by default created for a period of 5 years, but the change in projection may not necessarily be applied for the entire 5 years. The tenure for which the specified variation is applicable can also be defined while specifying the variation. The magnitude of variation being applied can be specified either in 'percentage' or 'absolute'. If the variation is specified as percentage then the value of the component to which variation is being applied changes by the corresponding percentage value for the specified time. Similarly, when variation is applied in absolute terms the value of the component to which variation is being applied changes by the corresponding absolute value for the specified time.

Certain users should have the authority to save a scenario which can later be accessed by other users for reference. The variations once applied can be applied on the income statement by either of the following two methods:

- **Basic** - The variations that are applied get simply aggregated with the modified values of components to show the resulting net income. The basic version supports variations to be applied to multiple parameters at the same time.
- **Advanced** - The variations that are applied also affect the other components it is correlated to and the modified values of all such parameters gets aggregated to show the resulting net income. In the Advanced version variation can be applied to only a single component at a time.

The scenarios that are thus created can be used to analyze the outcome on profitability of any probable change in future. Certain users should have the authority to save a scenario which can later be accessed by other users for reference. It is also possible to create a scenario on an existing scenario by applying variations to the components of income statement in the scenario.

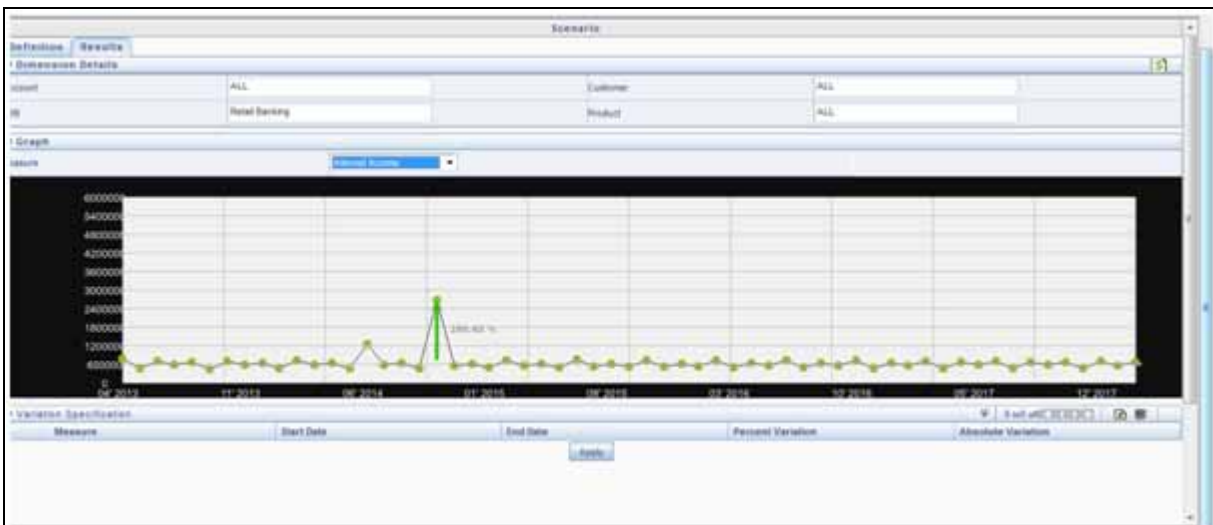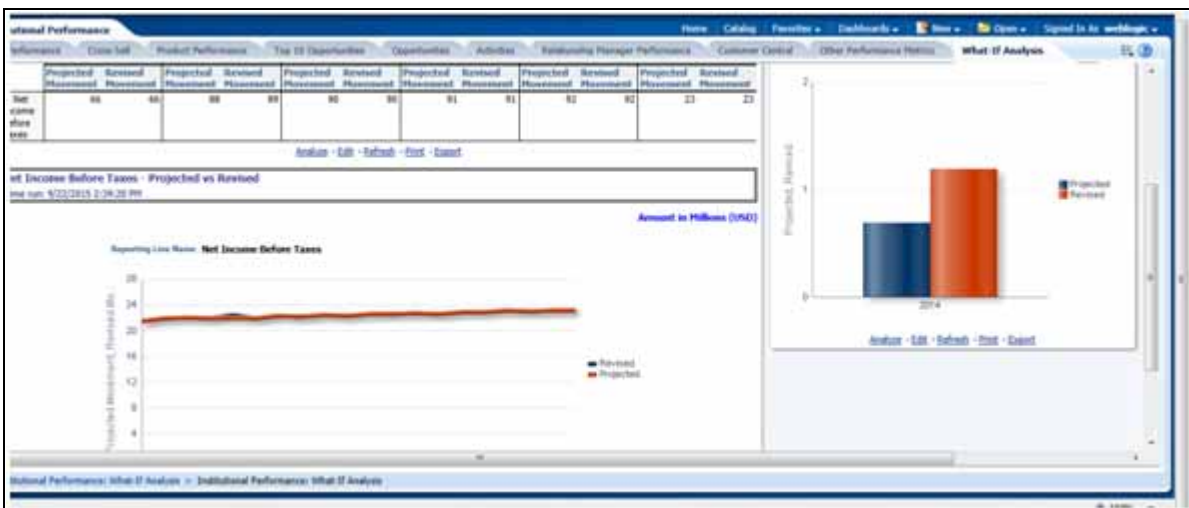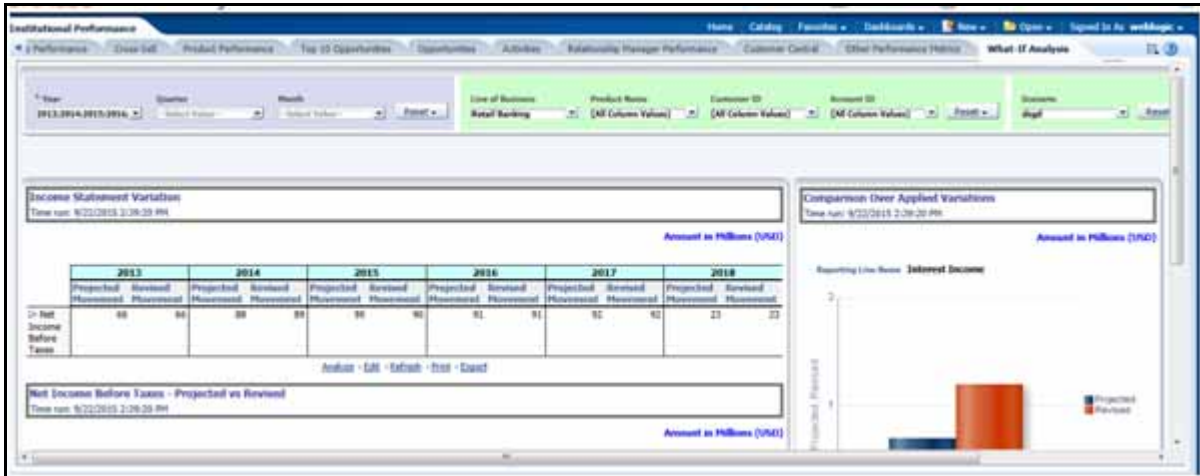

Configurations for What-If Analysis


Configure connection to the What-If Variation application page in OFSAAI in the *Create Scenario* Analysis. OFSAAI is Oracle Financial Services proprietary tool which uses Java to enable users to apply variations on the projected data.

Example: Assume that the ofsa hostname is 10.184.150.107 and the OBIEE analytics port is 7001. Hence, the OBIEE analytics access url would be:

http://bank_host:8080/PFT801.


To configure these details to the What-If analysis framework, the user needs to perform the following steps :

1. Navigate to *What-If Analysis Dashboard Page and Edit Dashboard Page*. This page would be under the Dashboard – Institutional Performance for OFSIPA.

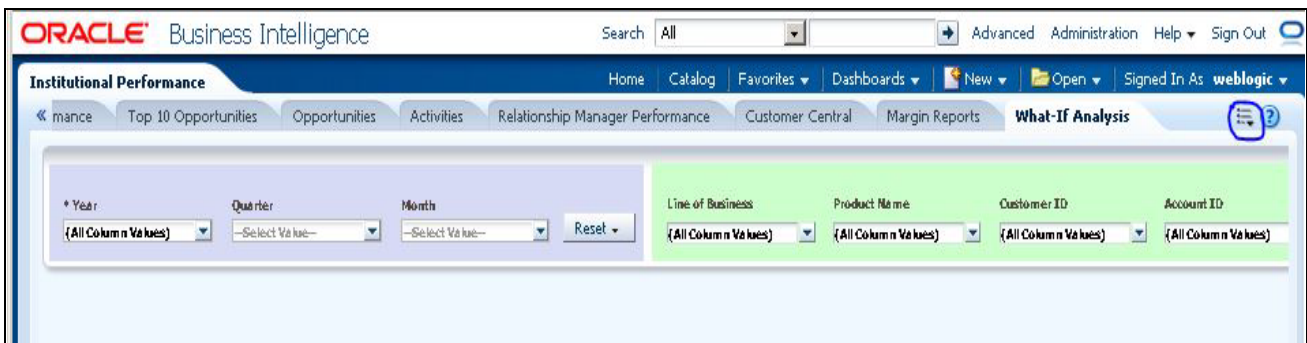


- Edit the analysis Create Scenario.


Note: Only users with OBIEE roles higher than BI Author will be able to edit.

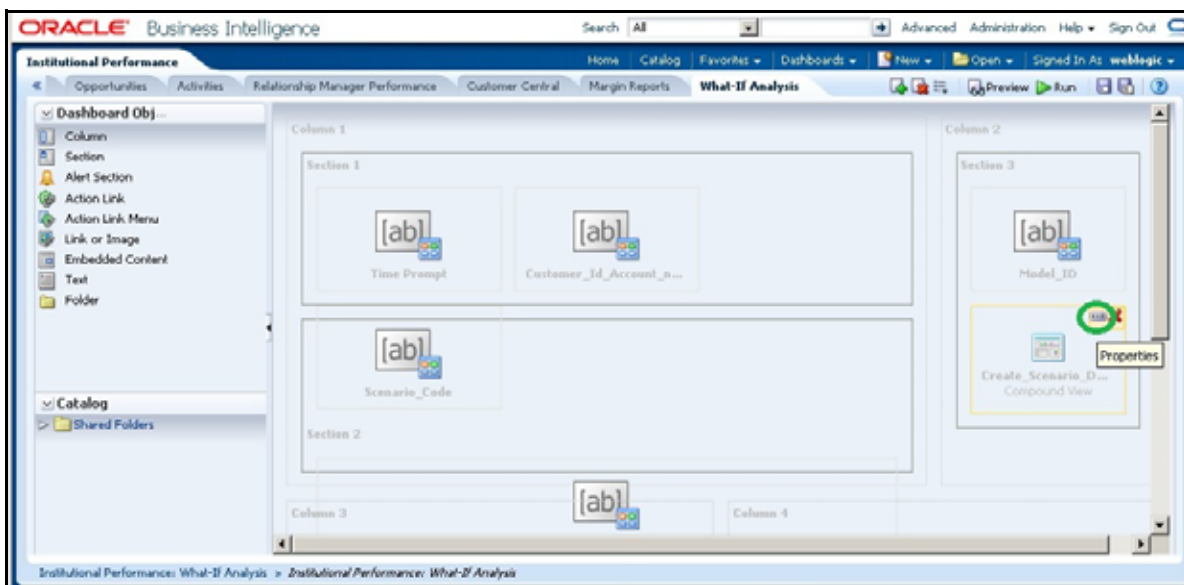

- Navigate to the Advanced XML section and edit the contents of the Analysis XML

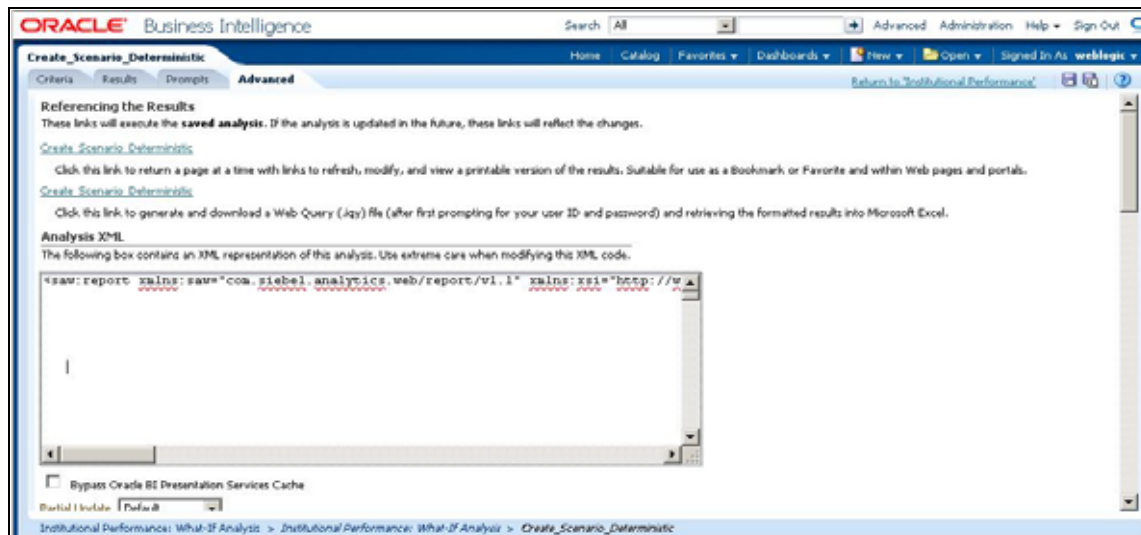

- Replace all occurrences of ##ofsa_hostname## with the OFSAAI user hostname (example : bank_host), ##ofsa_port## with the OFSAAI servlet port (example : 8080) and the ##ofsa_context## with the context of the OFSAAI instance (example : PFT801).
- Click **Apply XML** and save the analysis after the occurrences of placeholders have been replaced and the XML contents have been pasted.

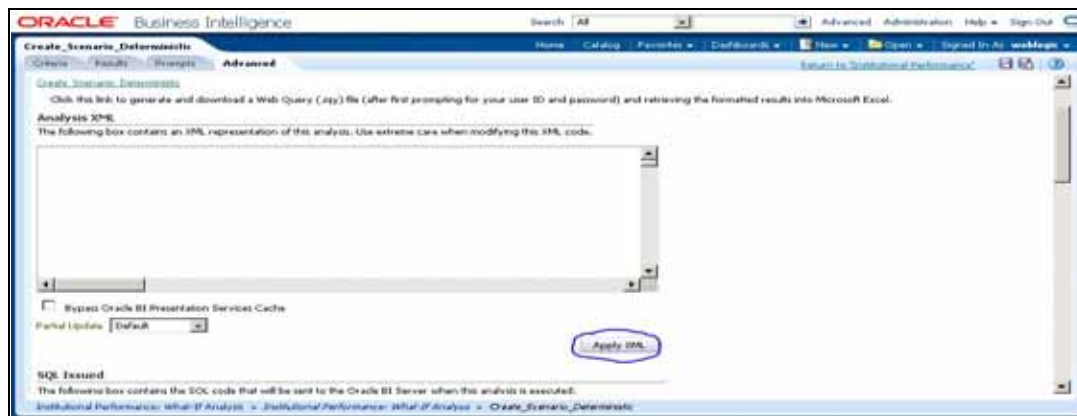

2. Configure OBIEE url in the What-If Model Definition setup tables to be able to navigate between the OFSAAI and OBIEE screens.


Example: Assume that the user hostname is – 10.184.150.107 and the OBIEE analytics port is 7001. Hence, the OBIEE analytics access url would be:

<http://10.184.150.107:7001/analytics>.

To configure these details to the What-If analysis framework, the user needs to execute the following update on the atomic schema:


```
update fsi_m_wif_model_defn set output_page = replace(replace(output_page, '##hostname##',
'10.184.150.107' ), '##port##', '7001')
/
Commit
/
```

Where the hostname and port replaced would be the user’s corresponding hostname and port instead of the examples mentioned above.

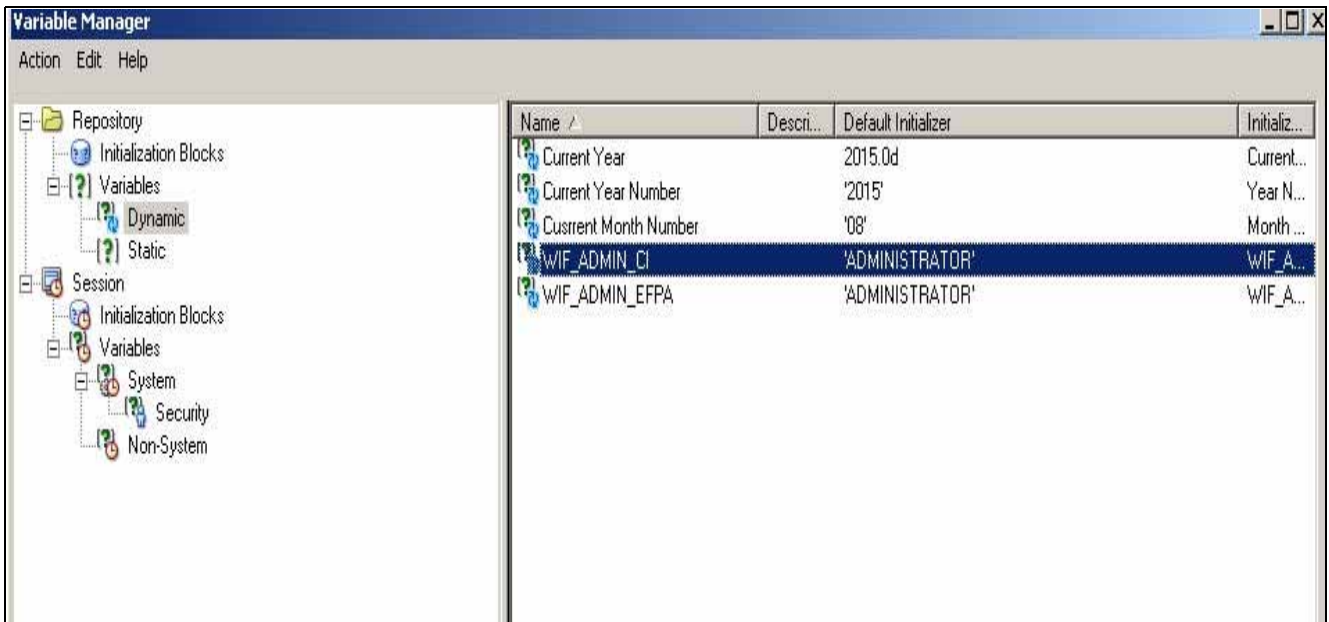


3. Configure What-If Admin Role in RPD to configure security roles to restrict Scenario Creation. If a user is not a What-If administrator, the user will only have access to “Display Results”. The results of this operation will not be persisted beyond one session per user.


- Open the OFS_PFT_PACK RPD and navigate to the Variable Definition Screen

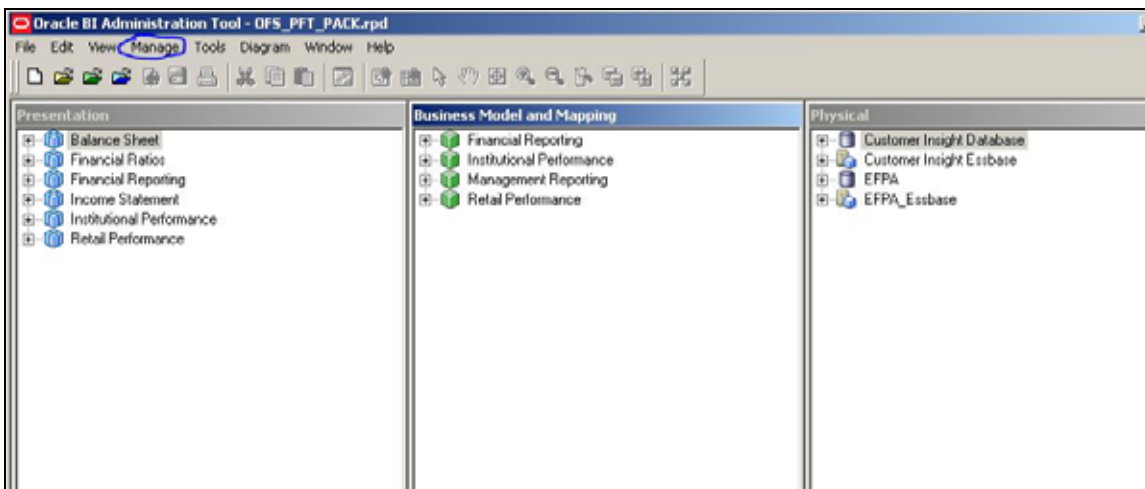

- Modify the WIF_ADMIN_CI Repository Dynamic Variable:

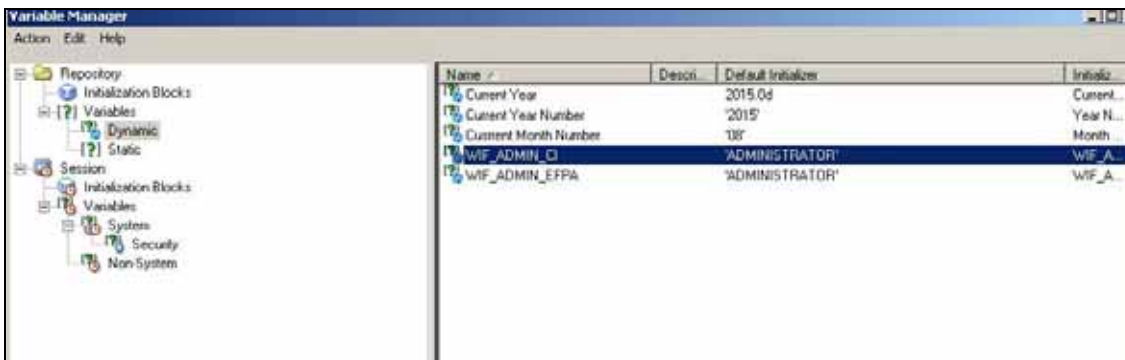

- Edit the default initializer to enter the desired What-If Administrator role. The user with this role will have the privilege to create and save a scenario. Users without this privilege will only be able to create a scenario, but not save it.

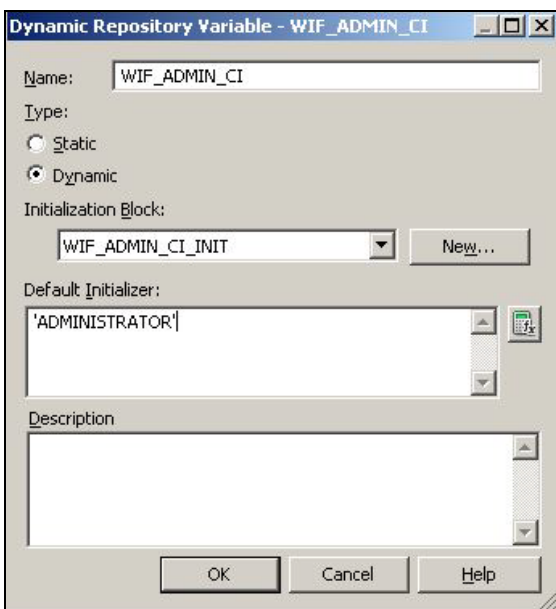

4. If the web server is Tomcat of version $\geq 8.0.18$, following additional configuration needs to be done to avoid Performance Issues while performing What-If Analysis :

Add the following tags in the `server.xml` file under `tomcat_folder/conf/` :

Insert the below tag inside the “Context” tag as the first nested tag :

```
<Loader delegate="true"/>
```

Insert the following attributes for all the “Resource” tags under the “Context” tag :

```
removeAbandonedOnBorrow = "true"
removeAbandonedOnMaintenance="true"
```

Example :

```
<Context path="/PET" docBase="/scratch/ofsaaapp/tomcat-7.0.19/webapps/PET" debug="0" reloadable="false" crossContext="true">
  <Loader delegate="true"/>
  <Resource auth="Container"
    name="jdbc/FICMASTER"
    type="javax.sql.DataSource"
    driverClassName="oracle.jdbc.driver.OracleDriver"
    username="pftconf30"
    password="ofsaa8x"
    url="jdbc:oracle:thin:@10.184.153.87:1521:DEV12C"
    maxActive="1000"
    maxIdle="30"
    maxWait="10000" removeAbandoned="true" removeAbandonedTimeout="60" logAbandoned="true"
    removeAbandonedOnBorrow = "true" removeAbandonedOnMaintenance="true" />

  <Resource auth="Container"
    name="jdbc/OFSPPTINFO"
    type="javax.sql.DataSource"
    driverClassName="oracle.jdbc.driver.OracleDriver"
    username="pftatm30"
    password="ofsaa8x"
    url="jdbc:oracle:thin:@10.184.153.87:1521:DEV12C"
    maxActive="1000"
    maxIdle="30"
    maxWait="10000" removeAbandoned="true" removeAbandonedTimeout="60" logAbandoned="true"
    removeAbandonedOnBorrow = "true" removeAbandonedOnMaintenance="true" />
</Context>
```

What-If Analysis Limitation

There is limitation on graph. Default upper limit for the graph will be based on underlying data in fact table. Variations applied above the normal can be applied using the grid. If the user wants to apply variation beyond the upper limit shown in graph, it is not possible through graph and hence, it should be applied through grid. The same applies to Negative Values. The graph does not allow applying negative variations. That is, the graph nodes cannot be dragged below the X Axis. This change needs to be done using the grid mode.

This chapter discusses the following topics:

- [Introduction](#)
- [Creating a rule](#)
- [Editing a rule](#)

Introduction

Segmentation is the procedure of grouping together a set of customers based on certain similar features. These customers grouped together are known to have similar behavior and hence, the future behavior of accounts within a segment can be predicted to follow the similar behavioral patterns as observed for other accounts. Thus, by predicting the behavior of an account, it can be segmented with a set of similar accounts and its future projections can be created. These future projections provide the value of net income that can be expected from an account or customer.

Segmentation is done based on a certain set of dimensions wherein accounts which exhibit a particular combination of dimension members are grouped together. Based on the characteristic around which segmentation is to be created, the dimensions used for segmentation can vary.

Following are the several segmentation types that are being supported:

- Corporate Tracker Segmentation
- Profitability segmentation
- Risk Based Segmentation
- Behavioral Segmentation

Note: The segmentation models within CI are also used to provide an output to OFS Price Creation and Discovery application (OFS PCD). The segments within CI calculate the average values of profitability components which are then used in PCD to analyze the future behavior of an account belonging to that segment and predict its profitability.

The objective of segmentation is to define a framework that will score accounts at MIS Date and Run level and correspondingly create clusters based on the scores.

These scores and segments will be stored into a new fact table. The inputs for this model will come from the following tables:

- Year of incorporation
- Status of listing
- Income
- Industry
- Country of incorporation
- Group asset size

Average of the measures present in Account Profitability for Account Segments across Reporting Lines and Month on Book for the account are reported into the following table.

Following is the list of Product Types used in IPA segmentation:

- CASA for Current and Saving Accounts
- TD for Term Deposits
- LOAN for Loan Contracts
- CC for Credit Cards.

Similar Product Type which is used in Price Creation and Discovery are being referred as CARDS for Credit Cards and Term Deposits.

When Price Creation and Discovery is integrated and is installed with IPA, user is required to update column V_PRODUCT_TYPE in FSI_SEG_REP_LINE_MAP table accordingly to the match the product type used in the Price Creation and Discovery Application.

Table 33. FCT_ACCOUNT_SEGMENT_SCORE

Column Name	Logical Name
N_ACCT_SKEY	Account Key
D_ACCT_START_DATE	Account Start Date
N_ACCT_SEGMENT	Account Segment
N_ACCT_SEGMENT_SCORE	Account Segment Score
N_RUN_SKEY	Run Key
N_MIS_DATE_SKEY	Date Key

The above table will act as the input for another table that stores facts of Account Profitability (Movement, Average Balance, and so on) at the level of Month on Book, Account Segment, Run, and Reporting Line. Following is the structure of this table.

Table 34. FCT_ACCT_SEGMENT_MOB_SUMMARY

Column Name	Logical Name
AVG_BAL_RCY	AccountAverageBalanceReportingCurrency
N_END_BAL	AccountEndingBalance
AVG_BAL	AccountAverageBalance
END_BAL_RC	AccountEndingBalanceReportingCurrency
MOVEMENT	Movement
MOVEMENT_RCY	MovementReportingCurrency
REP_LINE_CD	ReportingLineCode
RUN_SKEY	Run Key
MONTH_ON_BOOK	Month on Book
ACCT_SEGMENT	Account Segment


DIM_SEGMENT_TABLE would be populated using SCD Process (Map reference number 267) and source would be a view DIM_SEGMENT_V for which data would be from DIM_SEGMENT_B/TL and FSI_SEGMENT_TYPE_CD/MLS tables. FSI_SEGMENT_TYPE_CD/MLS table stores list of Segment Types used in IPA. For example, Corporate Tracker, Behavioral, Profitability segments, and so on.

The Segment score will not be updated. The rule will update only the n_segment.


Creating a rule

To define a rule, follow these steps:


1. Click **Rule** and the following rule appears.

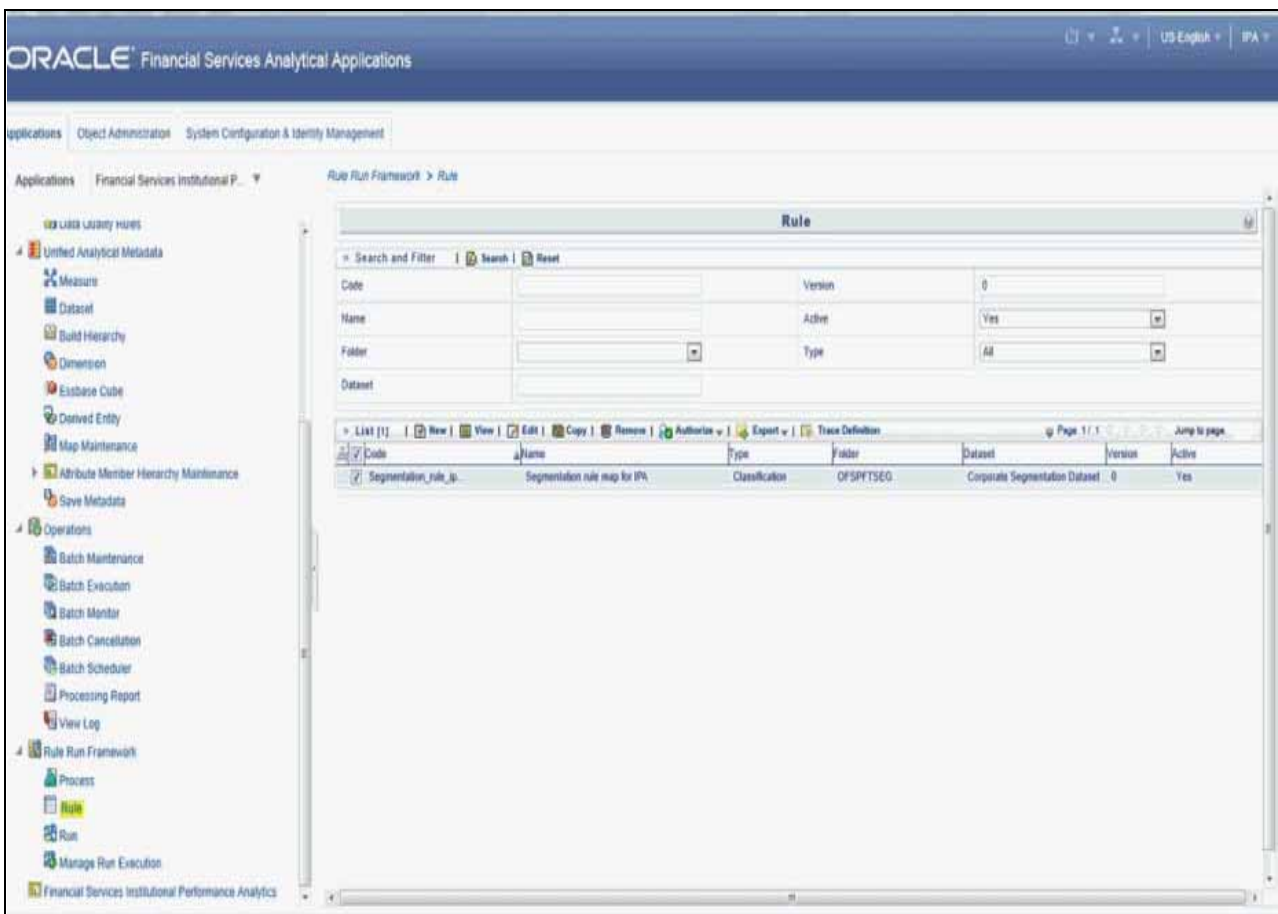

2. Select the rule and click **View**. The following screen appears.

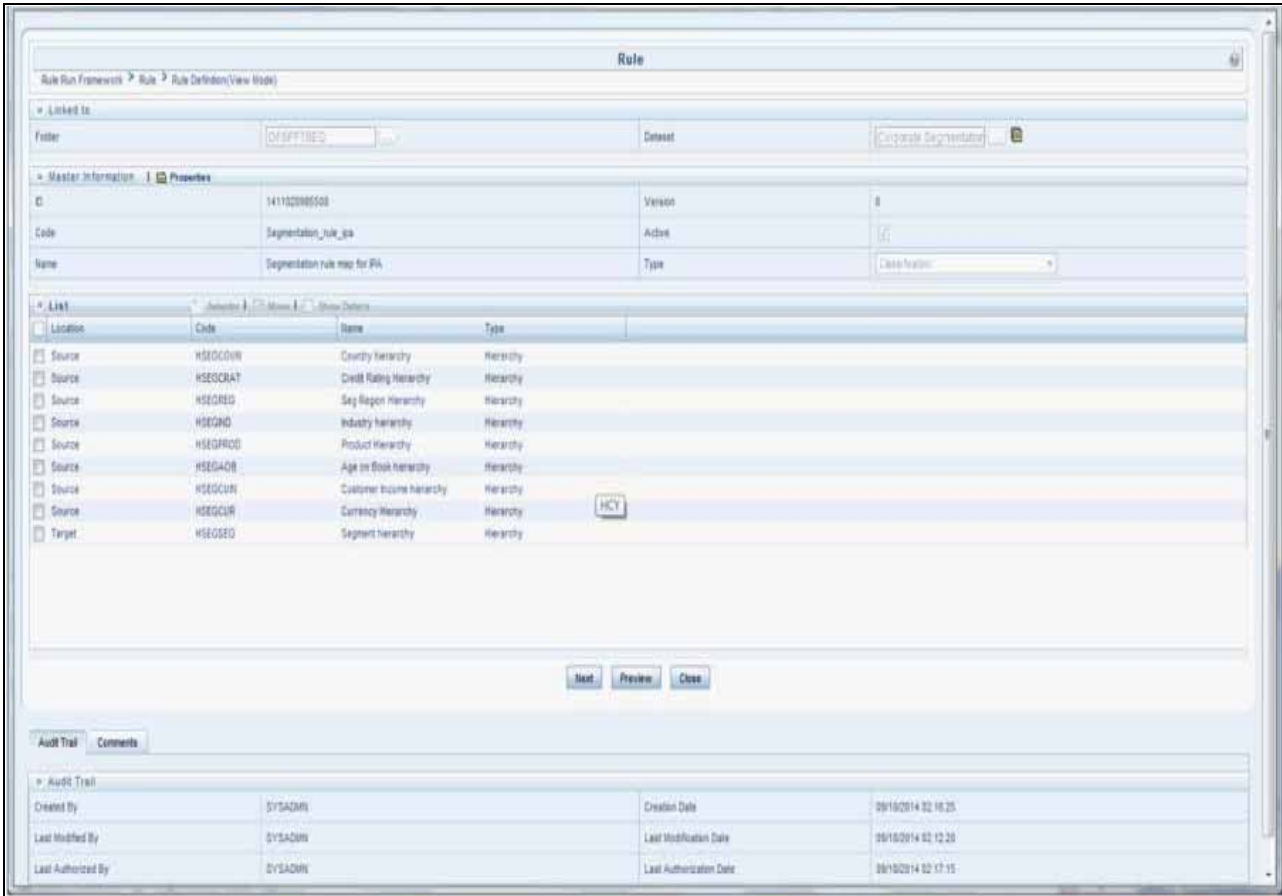


- On clicking **Next**, the rule defined comes up. For the first time when the rule is not defined, only default seeded node rule should appear as shown in the following screen:

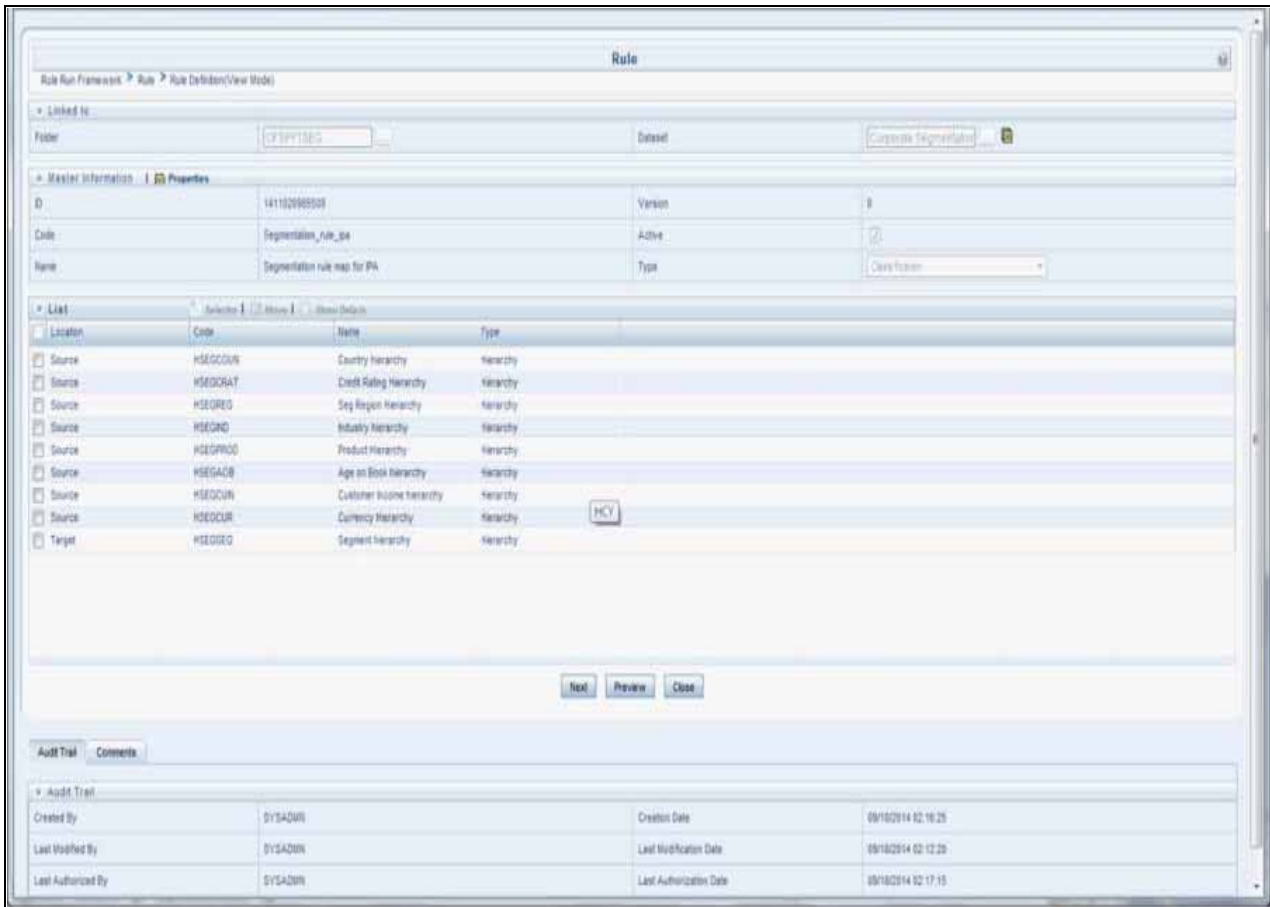


Editing a rule

To edit a rule, follow these steps:


1. Select the rule and click **Edit**. The following screen appears:

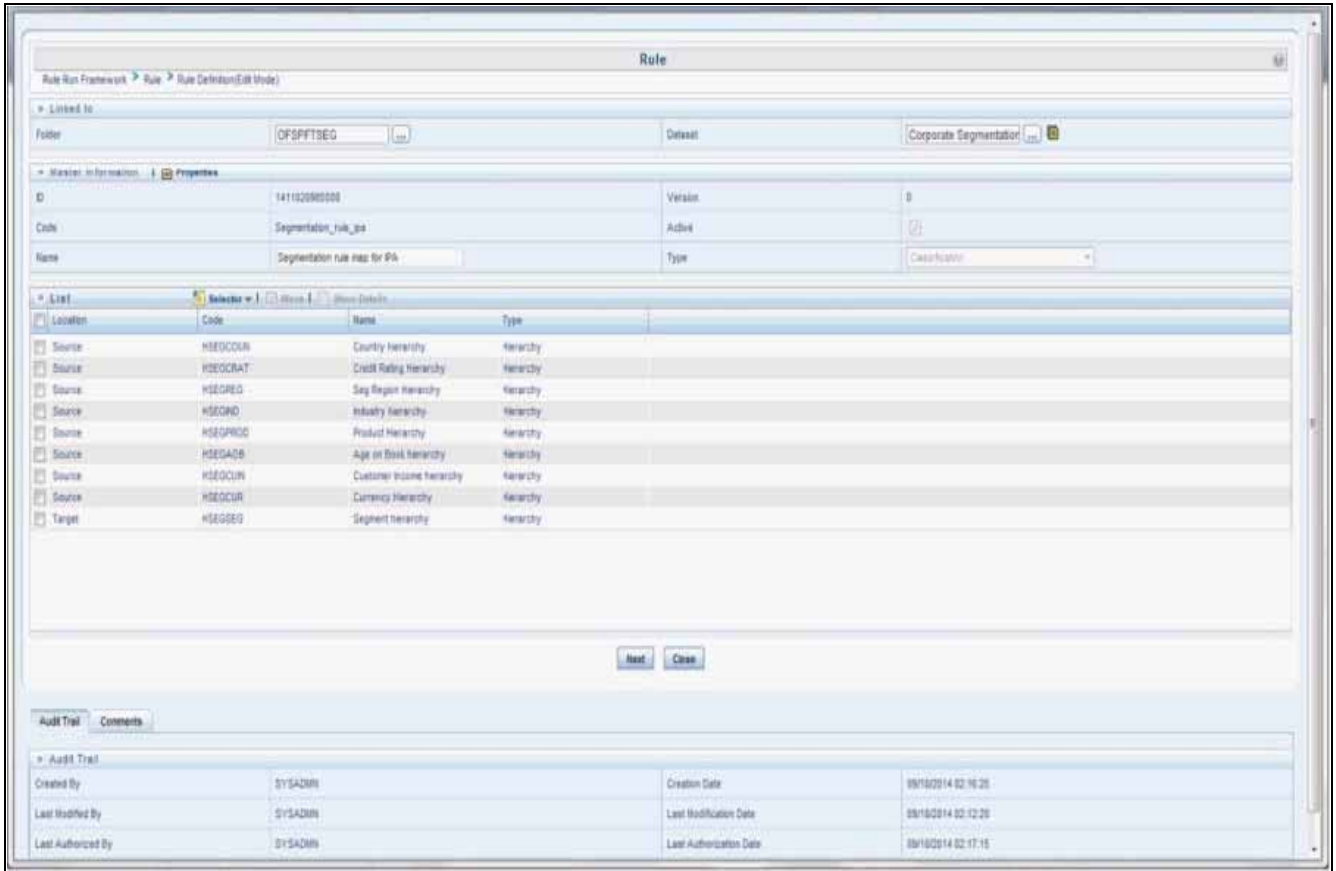


2. Click **Next**. First time default node defined as rule will show up in the following figure:

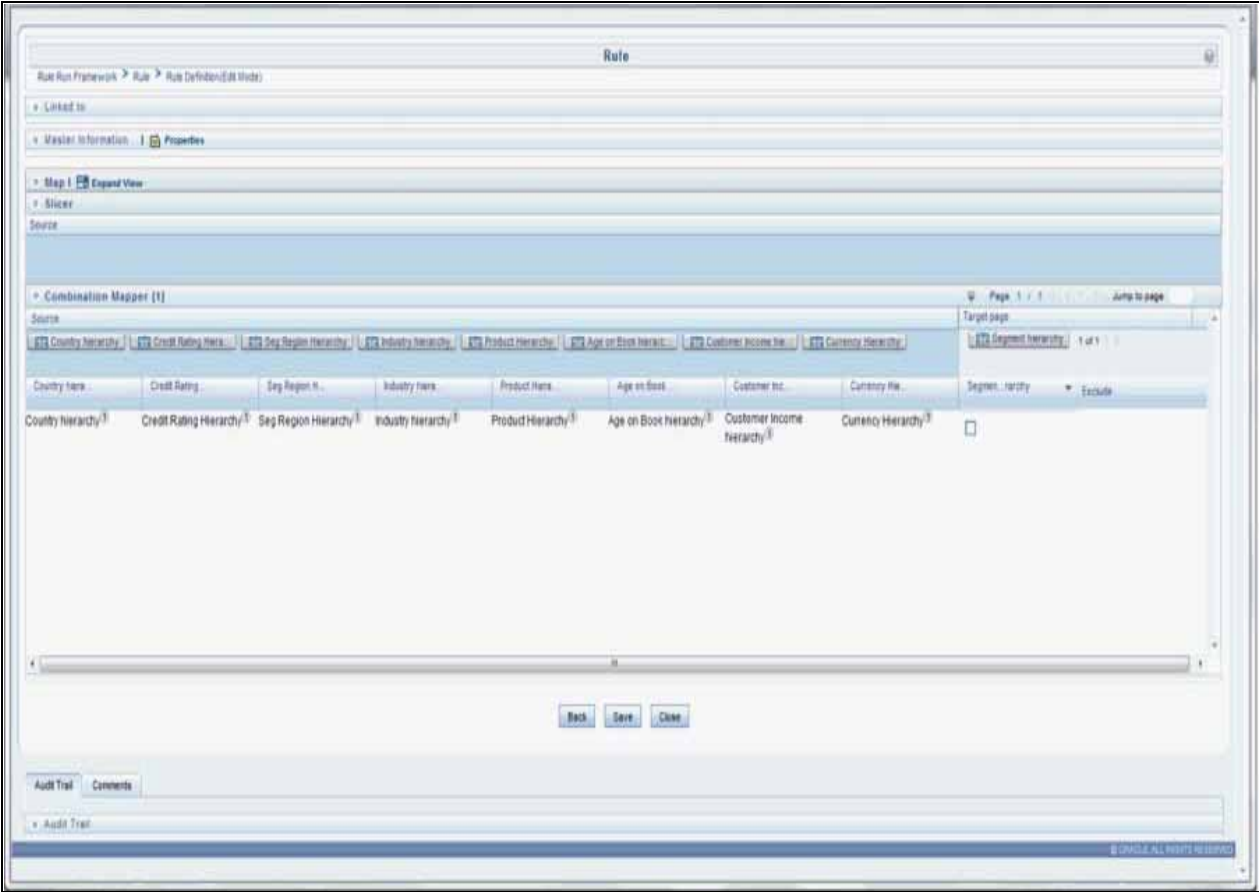


3. Click **Hierarchy** as shown in the following figure and the hierarchy screen opens up.

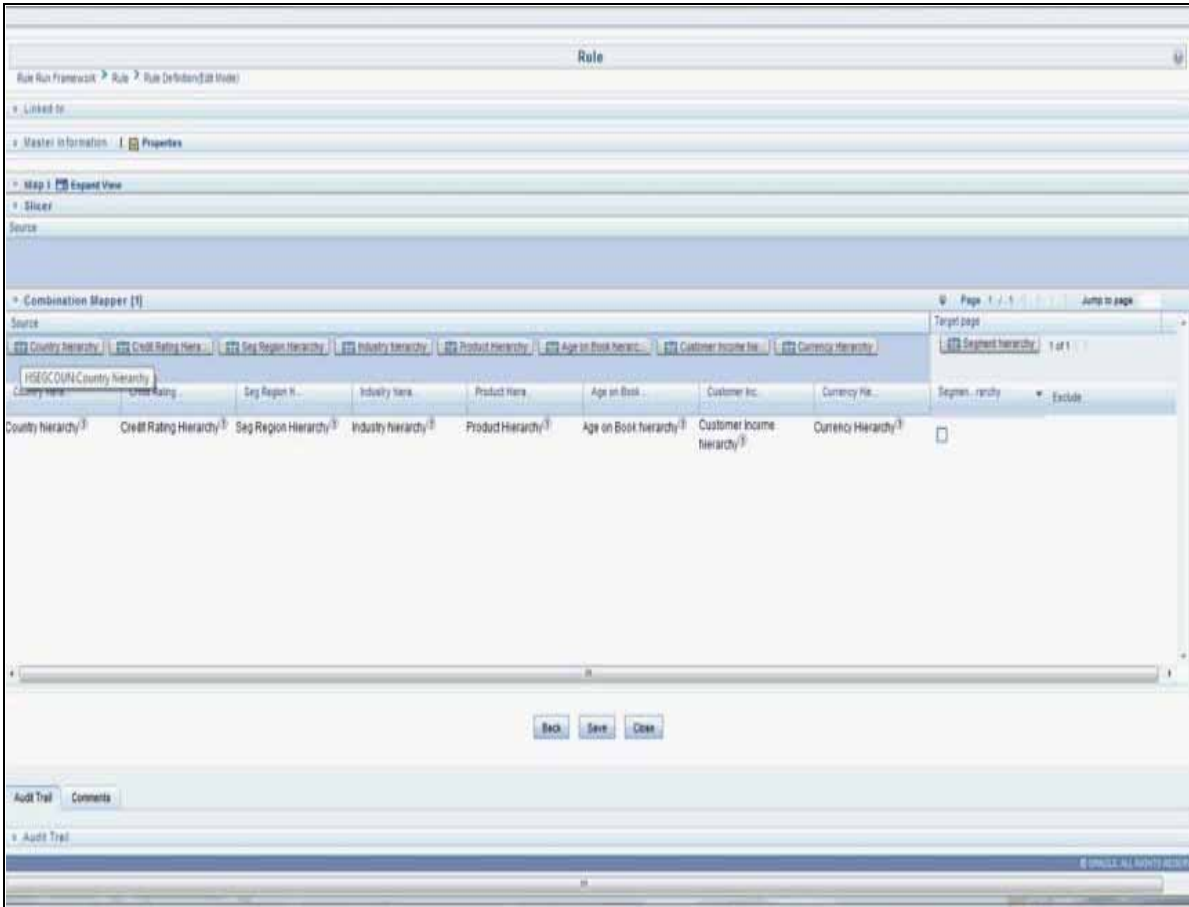


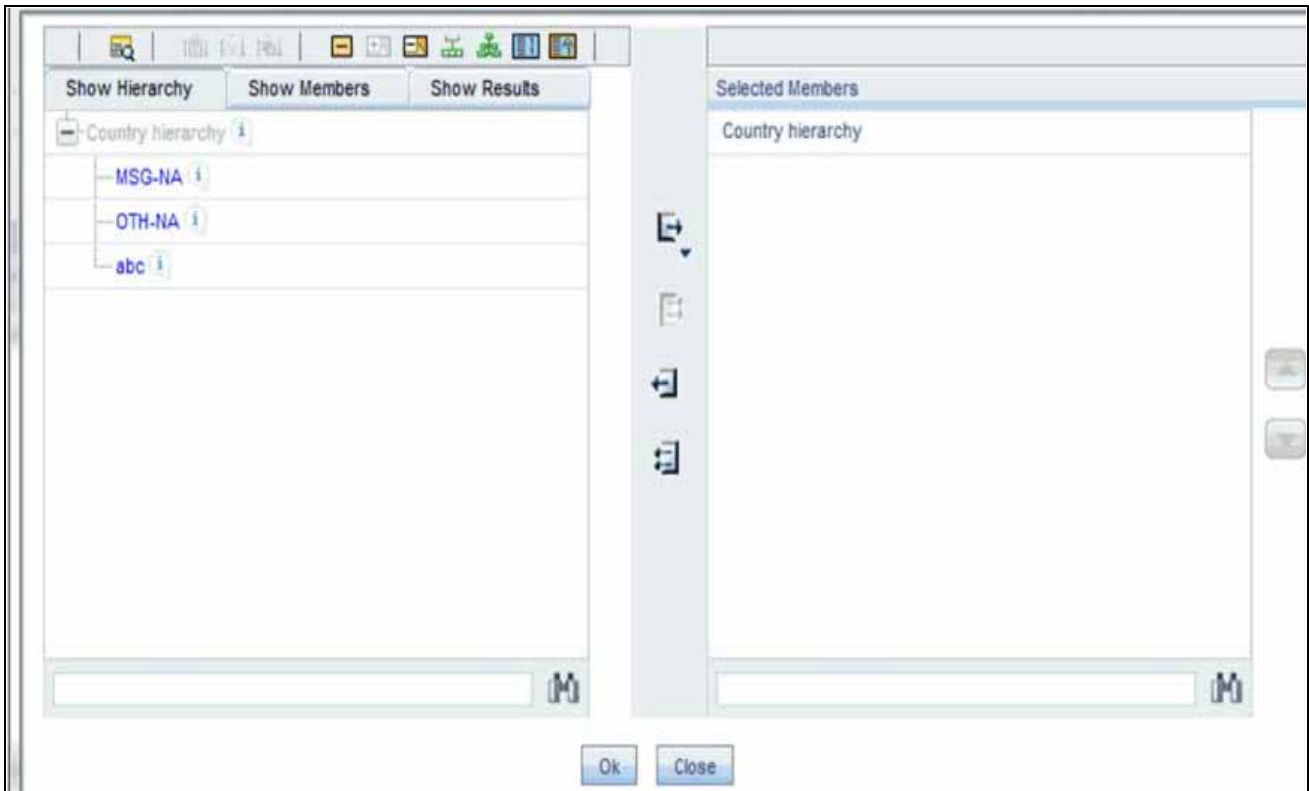


4. Select the hierarchy and click **OK**.

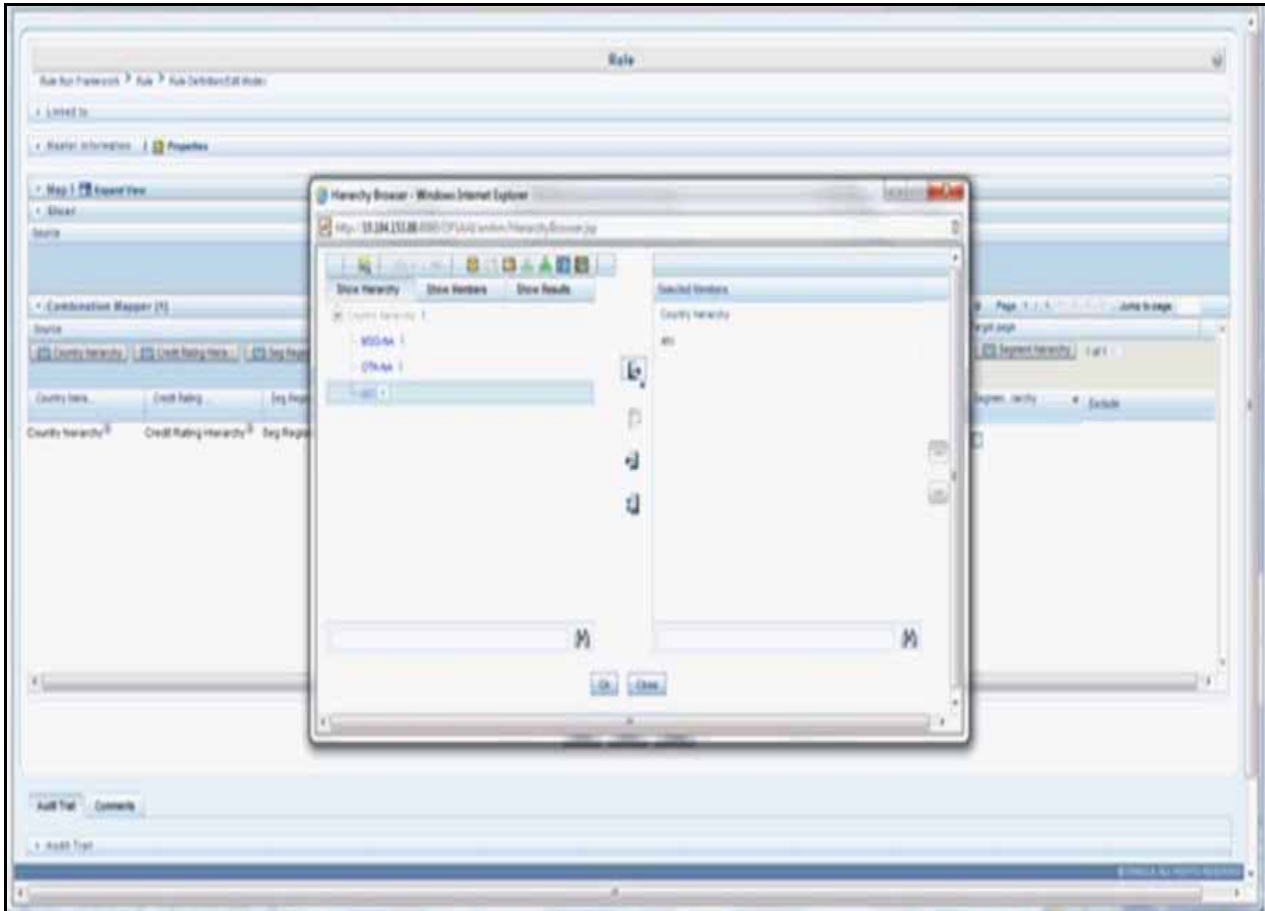

5. The selected node appears in the rule.

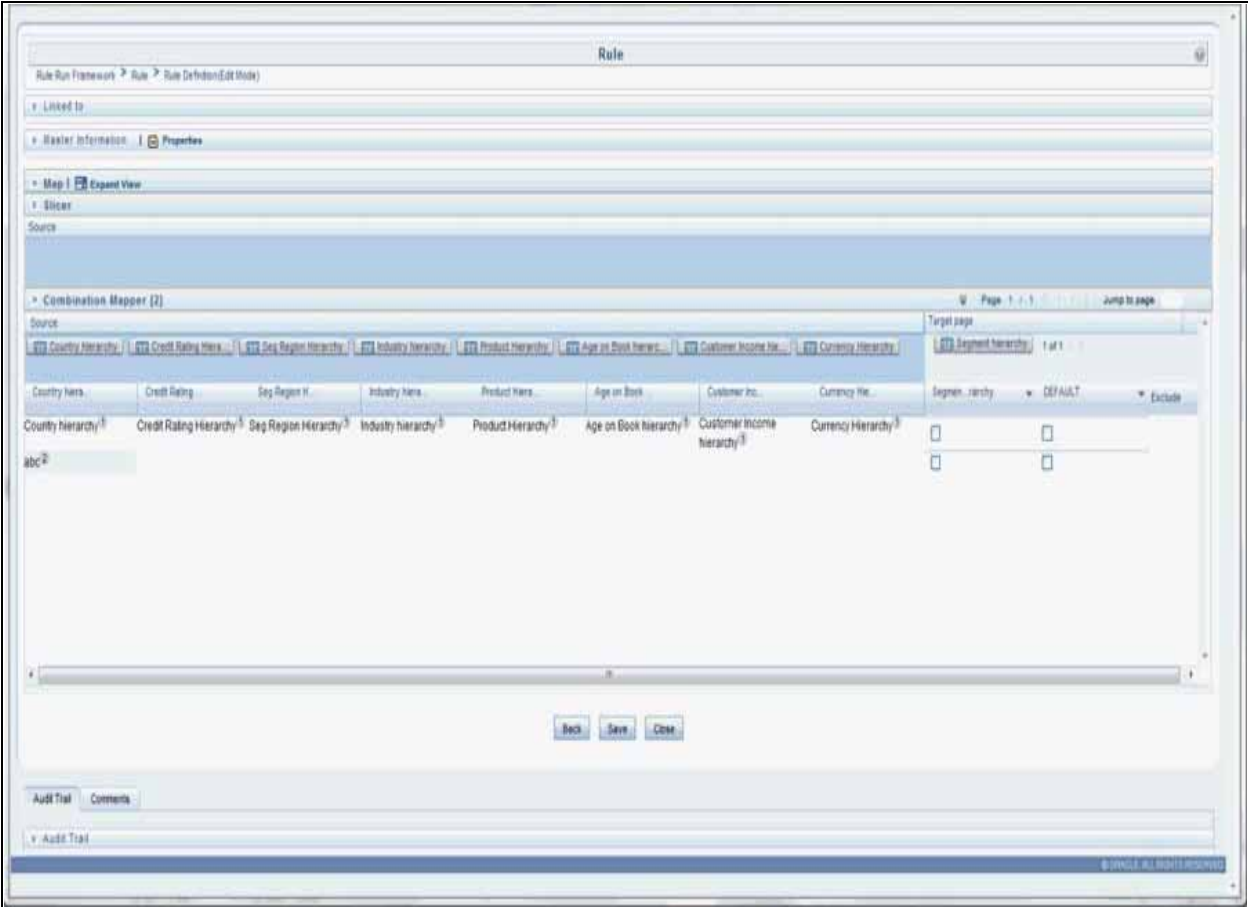


6. Similarly, select all the nodes that need to be considered for the rule and assign it to the target hierarchy. Click **Save**. A confirmation message appears as shown in the following.

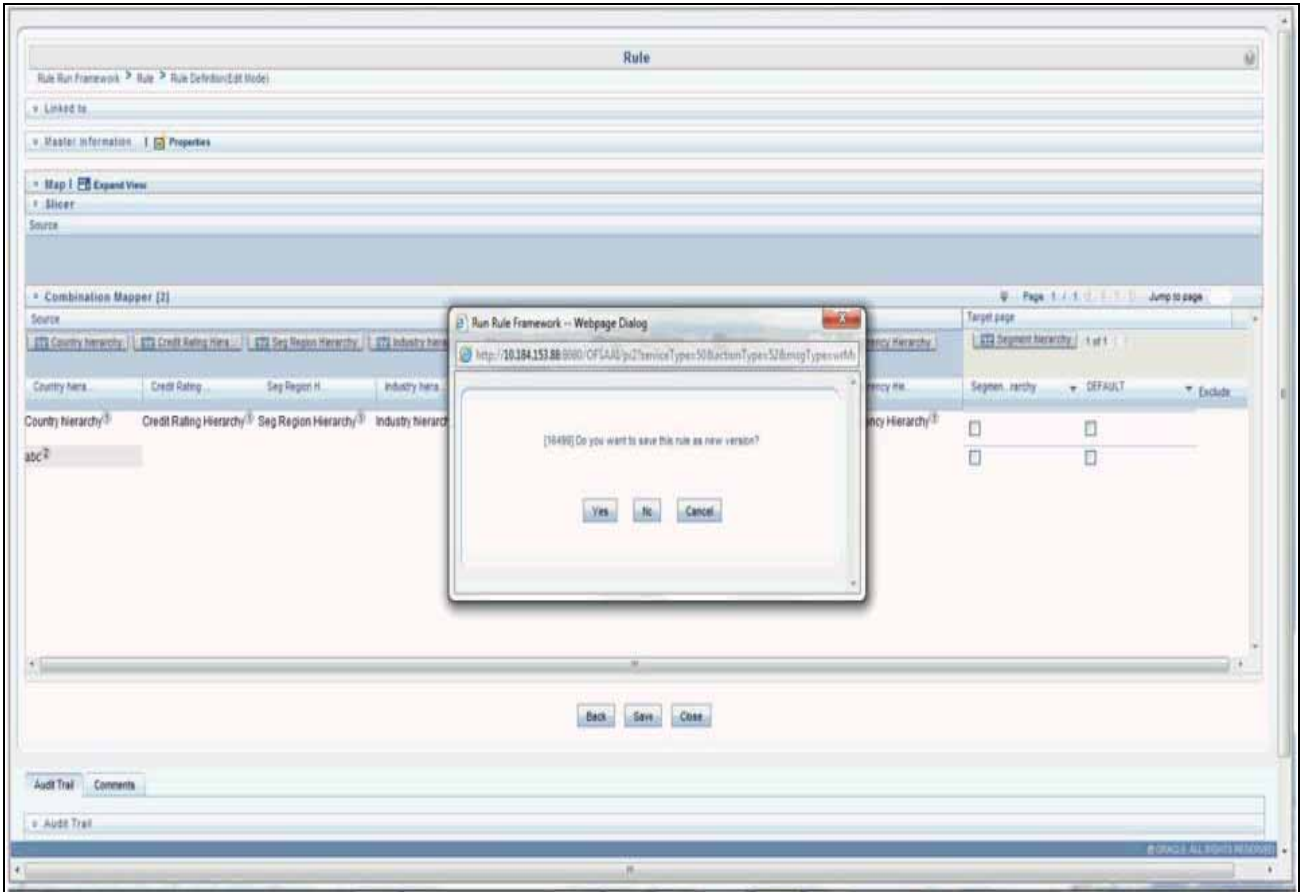

7. On clicking **Yes**, the following message appears: *Save action with authorize was successful on following definitions Segmentation_rule_ipa.*



8. Navigate back to the main screen and click the view rule. The rule saved is shown.

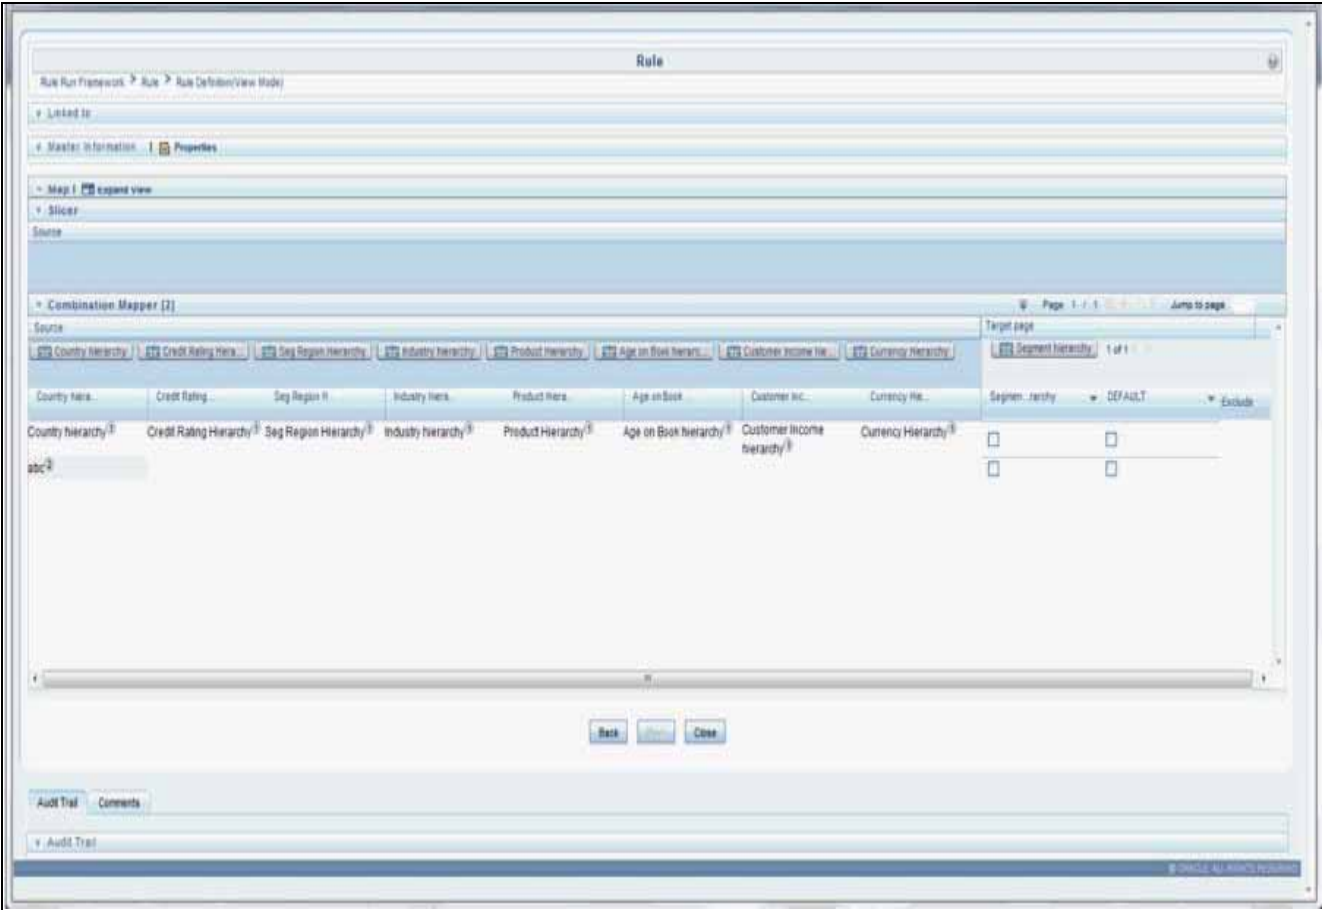

This chapter discusses the following topics:

- [Introduction](#)
- [Server side settings](#)
- [Client Side Settings](#)
- [Input Structure](#)
- [Output Structure](#)
- [Execute Service](#)

Introduction

Customer insight web service is designed to get consumed by other applications in order to get the profitability details. This web service will work at two different levels: customer level and account level.

To fetch the customer details, set the request level as customer level and the customer id for that particular customer must be part of input. To fetch account details, set the request level as account level and the account number for that particular account must be part of input.

Within one request you can request for either one or multiple customers details by sending the customer id as an input in structured input xml. Similarly, it works for accounts as well. If one customer id is invalid, then the request to fetch data for multiple customers will get completely discarded. This way is similar for account numbers at account level.

Server side settings

In the server side, there is a file `CUSTINSconfig.properties` which allows server side user to configure web-service. The following attributes can be configured:

- **Infodom**
Currently, CI web service will be enabled for one infodom and one user only at a time for a setup. That information domain has to be provided here.
- **UserId**
Currently, CI web service will be enabled for one infodom and one user only at a time for a setup. The server side user has to provide this information as the web service do not validate user/password.
- **Locale**
Provide 'en_US'
- **runId**

Provide 'VIEW_PROF_WS_RUN' as this is a generic web service which allows any package to be called at run-time.

- threadWaitTime

Provide a number here. Unit of the value will be milliseconds. This is a time that a web service call waits for an output to be generated. If an output is ready within that time, it is sent to the user else a system generated Reference Id is sent to the user, using which the user can get the data later as explained in the Input Structure.

Client Side Settings

In the server side, there is a file CUSTINSClientConfig.properties which allows server side user to configure web-service. The following attributes can be configured:

- wsdlSchemaLocation

This is the url of wsdl. To generate it, take contextURL, for example, `http://10.241.32.163:9085/OFSAAI73new` and append " /CustomerProfitabilityService?wsdl" to it. In this case, the wsdlSchemaLocation will be `"http://10.241.32.163:9085/OFSAAI73new/CustomerProfitabilityService?wsdl"`.

- targetNamespaceURI

Provide this as `http://webservice.customerinsight.custIns.fsapps ofs.com/` at all time.

- serviceName

Provide this as "CustomerProfitabilityService".

Input Structure

Input for this web service is an xml file. The required information is embedded into suitable xml tags. Input xml structure, that is, request xml will vary based on request level and the type of request. If the request is new, then it will have one input format and for polling the same request the structure will be different.

Examples

- Input xml for new request to get particular customer's detail

```
<?xml version = "1.0" encoding = "UTF-8" standalone = "yes"?>
<REQUEST>
<REQUEST_TYPE>VIEW_PROFITABILITY</REQUEST_TYPE>
<REFERENCE_NUMBER></REFERENCE_NUMBER>
<REQUEST_LEVEL>CUSTOMER_LEVEL</REQUEST_LEVEL>
<PARTY_ID>OBIB1C47</PARTY_ID>
</REQUEST>
```

Here for a new request, the request type must be VIEW_PROFITABILITY otherwise it throws an error saying invalid request type. Here REFERENCE_NUMBER must be blank as it is new request. As you would like to fetch customer data you must put the request level as CUSTOMER_LEVEL. And the value for the tag PARTY_ID specifies the customer id whose detail you need to fetch.

When you need to fetch data for multiple customers the request xml will be as mentioned below.

```
<?xml version = "1.0" encoding = "UTF-8" standalone = "yes"?>
<REQUEST>
<REQUEST_TYPE>VIEW_PROFITABILITY</REQUEST_TYPE>
<REFERENCE_NUMBER></REFERENCE_NUMBER>
<REQUEST_LEVEL>CUSTOMER_LEVEL</REQUEST_LEVEL>
<PARTY_ID>OBIB1C47</PARTY_ID>
<PARTY_ID>OBIB1C49</PARTY_ID>
<PARTY_ID>OBIB1C49</PARTY_ID>
<PARTY_ID>OBIB1C50</PARTY_ID>
<REQUEST>
```

Each `PARTY_ID` tag contains the customer id for one customer. In this way, you can request for multiple customers data.

- Input xml for polling request to get customer's detail

When you send a new request, sometimes the request takes more processing time. So in that case, the output will be one reference number which you can use for polling for the same request. The input xml structure will remain same irrespective of your request, whether for one customer or multiple customers. It is as follows:

```
<?xml version = "1.0" encoding = "UTF-8" standalone = "yes"?>
<REQUEST>
<REQUEST_TYPE>RE_REQUEST</REQUEST_TYPE>
<REFERENCE_NUMBER>56</REFERENCE_NUMBER>
<REQUEST_LEVEL></REQUEST_LEVEL>
<REQUEST>
```

Here the `REQUEST_TYPE` tag must have the value `RE_REQUEST`. Provide the number which you have received as an output initially inside `REFERENCE_NUMBER` tag.

- Input xml for new request to get particular account's detail

```
<?xml version = "1.0" encoding = "UTF-8" standalone = "yes"?>
<REQUEST>
<REQUEST_TYPE>VIEW_PROFITABILITY</REQUEST_TYPE>
<REFERENCE_NUMBER></REFERENCE_NUMBER>
<REQUEST_LEVEL>ACCOUNT_LEVEL</REQUEST_LEVEL>
<ACCOUNT_NUMBER>OBIB2C19A1</ACCOUNT_NUMBER>
<REQUEST>
```

Here for a new request, the request type must be `VIEW_PROFITABILITY` otherwise it throws an error saying invalid request type. Here `REFERENCE_NUMBER` must be blank as it is a new request. To fetch account data, provide the request level as `ACCOUNT_LEVEL`. And the value for the tag `ACCOUNT_NUMBER` specifies the account number whose detail you need to fetch.

When you need to fetch data for multiple accounts data the request xml will be as mentioned as follows:

```
<?xml version = "1.0" encoding = "UTF-8" standalone = "yes"?>
```

```
<REQUEST>
<REQUEST_TYPE>VIEW_PROFITABILITY</REQUEST_TYPE>
<REFERENCE_NUMBER></REFERENCE_NUMBER>
<REQUEST_LEVEL>ACCOUNT_LEVEL</REQUEST_LEVEL>
<ACCOUNT_NUMBER>OBIB2C19A1</ACCOUNT_NUMBER>
<ACCOUNT_NUMBER>OBIB2C19B1</ACCOUNT_NUMBER>
<REQUEST>
```

Each `ACCOUNT_NUMBER` tag contains the account number for one account. In this way, you can request for multiple accounts data.

- **Input xml for polling request to get account's detail**

When you send a new request it may happen that your request may take some more processing time. So in that case the output will be one reference number which you can use for polling for the same request. The input xml structure will remain same irrespective of your request was for one account or multiple accounts. It is as follows:

```
<?xml version = "1.0" encoding = "UTF-8" standalone = "yes"?>
<REQUEST>
<REQUEST_TYPE>RE_REQUEST</REQUEST_TYPE>
<REFERENCE_NUMBER>56</REFERENCE_NUMBER>
<REQUEST_LEVEL></REQUEST_LEVEL>
<REQUEST>
```

Here the `REQUEST_TYPE` tag must have the value `RE_REQUEST`. Provide the number which you have received as an output initially inside `REFERENCE_NUMBER` tag.

Output Structure

- **Output xml when the request is still processing at both customer and account level**

```
<?xml version = "1.0" encoding = "UTF-8"?>
<RESPONSE>
<STATUS>TIMEOUT</STATUS>
<REFERENCE_NUMBER>36</REFERENCE_NUMBER>
<RESPONSE>
```

- **Output xml structure when you send invalid customer id**

```
<?xml version = "1.0" encoding = "UTF-8"?>
<RESPONSE>
<STATUS>ERROR</STATUS>
<ERROR_MESSAGE>FAILED TO FETCH CUSTOMER
DETAILS</ERROR_MESSAGE>
<RESPONSE>
```

- **Output xml structure when you send invalid account number**

```
<?xml version = "1.0" encoding = "UTF-8"?>
```



```
<RESPONSE>  
<STATUS>ERROR</STATUS>  
<ERROR_MESSAGE>FAILED TO FETCH ACCOUNT  
DETAILS</ERROR_MESSAGE>  
<RESPONSE>
```

- In case of successful response for customer or account level request, the output will be in the form of structured xml document

Output for successful customer level request



Output for successful account level request



Execute Service

To process the customer/account/re-request level request, pass one argument.

File name which contains request Input XML.

A screenshot of a Windows command prompt window. The title bar shows 'C:\windows\system32\cmd.exe'. The command prompt shows the following text:

```
D:\tomcat\apache-tomcat-7.0.42\webapps\OFSAAI73\WEB-INF\lib>java -jar custInsClient.jar input.xml  
Please check response.xml file for output
```


This chapter discusses the following topics:

- [Introduction](#)
- [OBIEE Security](#)
- [Data Security](#)

Introduction

Visibility is implemented in order to restrict the user's access to the data and the metadata. The user can view based on the role and the privileges assigned to the user.

Visibility has been implemented using two security models:

- OBIEE Security
- Data Security

OBIEE Security

This has been implemented using the Roles and Privileges settings, the dashboard level, Report level, and the object level.

Data Security

This has been implemented with a sequence of tables used for controlling the data access to the user.

The set of tables are:

- FSI_M_USER - This table stores all the users who are not relationship managers and are business users who have access to data at different levels. The user id in this table should match the user's login id of OBIEE.
- FSI_M_USER_MANAER_MAP - This table stores all the users who are relationship managers. V_User_name should hold the Obiee login Id of the user who is a relationship manager. The Manager Code column should match with the entry in dim_management.
- FCT_ACCT_MANAGER_REL - This table restricts the user who is a relationship manager to certain account of customer/Customers. This defines the user at the lowest granularity.
- DIM_CUSTOMER - This table is to define if the user has access to all the accounts the customer holds. This is again to define the relationship manager visibility. This data will be moved from dim_party . Dim_party will be sourced from stg_party_master.

- FSI_USER_DATA_ACCESS - This is a mapper table enabled on AAI Mapper that provides UI for the user to set the visibility. The visibility of the user can be set at the following levels using the mapper - Product, Branch, Legal Entity, and Line of Business.
- FSI_USR_CTRL_ACCESS - This table contains all the records for each user and the access available to the user for every date. The data is sourced from FSI_M_USER_MANAGER_MAP, FSI_USER_DATA_ACCESS, DIM_MANAGEMENT, FCT_COMMON_ACCOUNT_SUMMARY, FCT_ACCT_MANAGER_REL, and DIM_CUSTOMER. The Parent Child hierarchies (derived entities) need to be refreshed before this table load. The names of the hierarchies are MGRPC and CUSTPC. The User has access to all the child nodes in the manager Hierarchy and all the customer hierarchies the user is managing, and the customer hierarchies managed by the child node managers as well.
- CTRLACC - This is a materialized view on the table FSI_USR_CTRL_ACCESS giving the distinct user access to accounts, customers, products, line of business, and legal entity. This view is used for applying visibility on the rpd. This is created as a derived entity and there is a job to refresh this derived entity.

Note: Users insertion in FSI_M_USER and FSI_M_USER_MANAGER_MAP has to be done directly into the table. For example, in presence of Single Signon System, these tables need to be loaded with data from single signon system directly.

This appendix discusses the following topics:

- [Introduction](#)
- [Dimension Definition Process](#)
- [Metadata](#)

Introduction

This section explains the steps to be performed by the user for adding a new dimension to the cube.

As a prerequisite, dimension tables should be added in the data model and the fact table needs to have the referential key with the dimension table. These dimension tables will hold dimension members and can be level-based or parent-child.

Level based dimension tables contain columns for each level of the hierarchy, while parent-child dimension tables contain columns for storing the relationship between the parent and child members. These dimension tables can be loaded from external systems or can be maintained within the Dimension Management component of OFSAAI.

If user intends to maintain the dimension within OFSAAI, see Data Model Utilities Guide for adding dimension tables under "Object Management" chapter.


Dimension Definition Process

Step 1 - Add Business Hierarchy

To define a new **Business Hierarchy**, go to **Unified Metadata Manager**, select **Business Metadata Management** and choose the type of hierarchy.

Hierarchy Types are:

- **Regular** - For representing non-time and non-measure dimensions in a hierarchical format. For example, this type are Product, Organization Unit, and so on.
- **Measure** - For representing the measures in the hierarchical format. This corresponds to a ACCOUNT hierarchy within the ESSBASE. An example of this type is Management Reporting Line.
- **Time** - For representing the calendar or date dimension in a hierarchical format. This corresponds to a TIME hierarchy within Essbase. An example of this type is Calendar hierarchy.

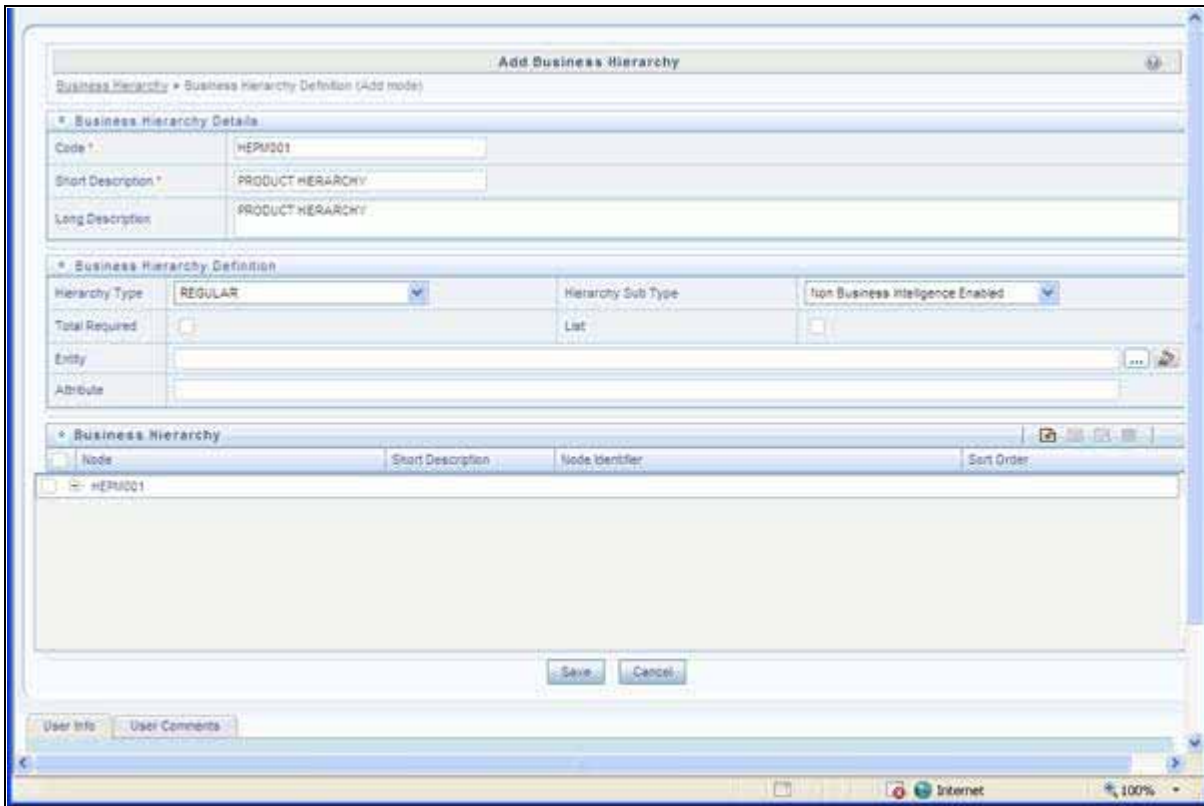

Choose Hierarchy subtype. Hierarchy SubTypes are:

- **Non Business Intelligence Enabled** – For representing the hierarchy with underlying data store containing just leaves and nodes are built within the metadata of the hierarchy. This subtype is useful for modelling bucket/range, ragged, and non-additive hierarchies.
- **Business Intelligence Enabled** – For representing the hierarchy with underlying data store as level-based dimension table. This subtype is useful for modelling balanced hierarchies.
- **Parent Child** – For representing the hierarchy with underlying data store as a parent-child dimension table. This subtype is useful for modelling ragged hierarchies.

Select the "Total Required" property, if a TOTAL is required to be included as the root node of the hierarch and select the "List" property, if hierarchy is a flat list of members without any levels.

Choose the entity and attribute on which the hierarchy is based. The components for hierarchy definition differ for each subtype of the hierarchy.

If subtype is "Non Business Intelligence Enabled", then the user can add nodes and order in which the node should appear in the hierarchy (sort-order). Node identifiers

are SQL expressions that are specified for leaf members and data is classified based on the node identifiers.

If sub-type is "Business Intelligence Enabled", then the user can specify the levels and SQL expression for each level within the hierarchy.

If sub-type is "Parent Child", then the user can specify the column that contains the parent member and that contains the child member.

For more details, see *Oracle Financial Services Analytical Applications Infrastructure 7.3 User Guide*.

Step 2 – Add Business Dimension

To define a new **Business Dimension**, go to **Unified Metadata Manager**, select **Business Metadata Management**.

Choose the **Dimension Type**. Dimension Type is same as Hierarchy Type and helps to filter the hierarchies that will be part of the dimension. A dimension will contain one or many hierarchies. Choose the hierarchies that are part of the dimension.

The User Info grid at the bottom of the screen displays the metadata information about the Business Dimension created along with the option to add comments.

Click **Save** in **Add Business Dimension** screen to save the details.

The screenshot shows the 'Add Business Dimension' form in a web browser. The form is titled 'Add Business Dimension' and has a breadcrumb trail: 'Business Dimension > Business Dimension Definition (Add mode)'. The form is divided into several sections:

- Business Dimension Details:** This section contains several input fields:
 - Code: DEPM001
 - Short Description: PRODUCT DIMENSION
 - Dimension Type: REGULAR (with a dropdown arrow)
 - Data Type: TEXT (with a dropdown arrow)
 - Long Description: (empty text area)
- Hierarchies:** This section has a 'Selected Hierarchies' table and a '+ Add Hierarchies Selected' button.
- User Info:** This section has a 'User Comments' tab and a grid for user information:

Created By		Created Date	
Last Modified By		Modified Date	
Authorized By		Authorized Date	


At the bottom of the form, there are 'Save' and 'Cancel' buttons. The browser's status bar at the bottom shows 'Done', 'Internet', and '100%' zoom.

For more details, see *Oracle Financial Services Analytical Applications Infrastructure 7.3 User Guide*.

Step 3 – Modify Data Set

To modify **Data Sets**, go to **Unified Metadata Manager --> Business Metadata Management**.

Identify data sets that are based on the modified fact table. Open the data set definition. Include the new dimension table in the data set. Modify the data set JOIN to include the join clause between the fact table and new dimension table. Save the data set.

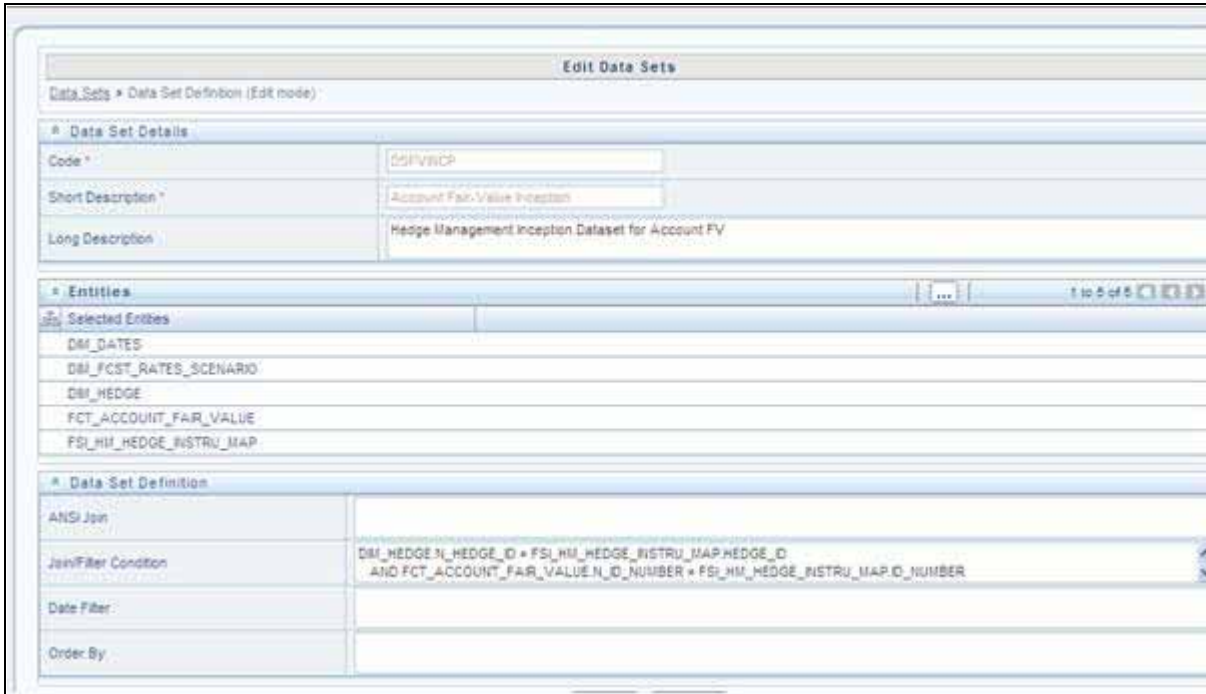

For more details, see *Oracle Financial Services Analytical Applications Infrastructure 7.3 User Guide*.

Step 4 – Modify Cube Definition

Modify "Cubes" in **Unified Metadata Manager -> Business Metadata Management**.

Identify the cube that needs to be modified. Open the cube definition. Add the new dimension. Map the measures to the newly added dimension and **Save** the cube definition.

For more details, see *Oracle Financial Services Analytical Applications Infrastructure 7.3 User Guide*.

Step 5 – Build Cube

Assuming that the dimension table and fact table is loaded with relevant data, cube can be built. Define batch to execute the CREATE CUBE component that will build the outline and load data in ESSBASE.

For more information on executing batch, see *Oracle Financial Services Analytical Applications Infrastructure 7.3 User Guide*.

Steps to follow while using ESSBASE Source for Relationship Manager Hierarchy

The following are the steps to follow while using ESSBASE Source for Relationship Manager Hierarchy.

1. When creating a Parent Child hierarchy using ESSBASE, ESSBASE creates two additional parents to the existing hierarchy. For example:

Relationship Manager Hierarchy
▽ Relationship Manager Dimension
▽ HEPMRM02:HEPMRM02:ND
▽ A
B
▽ C
▽ D
▽ E
F

Relationship Manager Hierarchy
▽ A
B
▽ C
▽ D
▽ E
F

The first hierarchy is generated by RDBMS source and the second is generated by ESSBASE source. The additional parents are the Hierarchy Name and the Dimension Name of the metadata bearing the hierarchy.

- In the context of using Relationship Manager Hierarchy for Institutional Performance, there is a concept of visibility of data implemented. This means that while using a cube source, D can see A listed as a manager in the hierarchy. However, D does not have the privilege to view the data (revenue, movement, and so on) related to A but can view the data for all the child nodes of D, for example, E and F. As a result, if Relationship Manager Hierarchy is selected along with Direct Movement, no results are displayed.

▽ **Selected Columns**

Double click on column names in the Subject Areas pane to add them to the Selected Columns pane. To delete a column, click on the column name or hover over the button next to its name.

Dim - Management	Fact - Account Profitability
Relationship Manager Hierarchy	Direct Movement

Compound Layout

No Results


The specified criteria didn't result in any data.

[Refresh](#)

- To view results for the logged-in Relationship Manager, the user must choose the Relationship Manager who is mapped to the user. In this case, the logged-in user is weblogic. From FSI_M_USER_MANAGER_MAP, the following is seen:

	V_USERNAME	V_MANAGER_CCDE	D.V_AM_ACCT_MANAGER_FIRST_NAME
1	RELATIONSHIP MANAGER ...	A01 ...	A ...
2	SALES REPRESENTATIVE ...	A02 ...	B ...
3	weblogic ...	A03 ...	C ...

4. Thus the user must start the hierarchy with C.

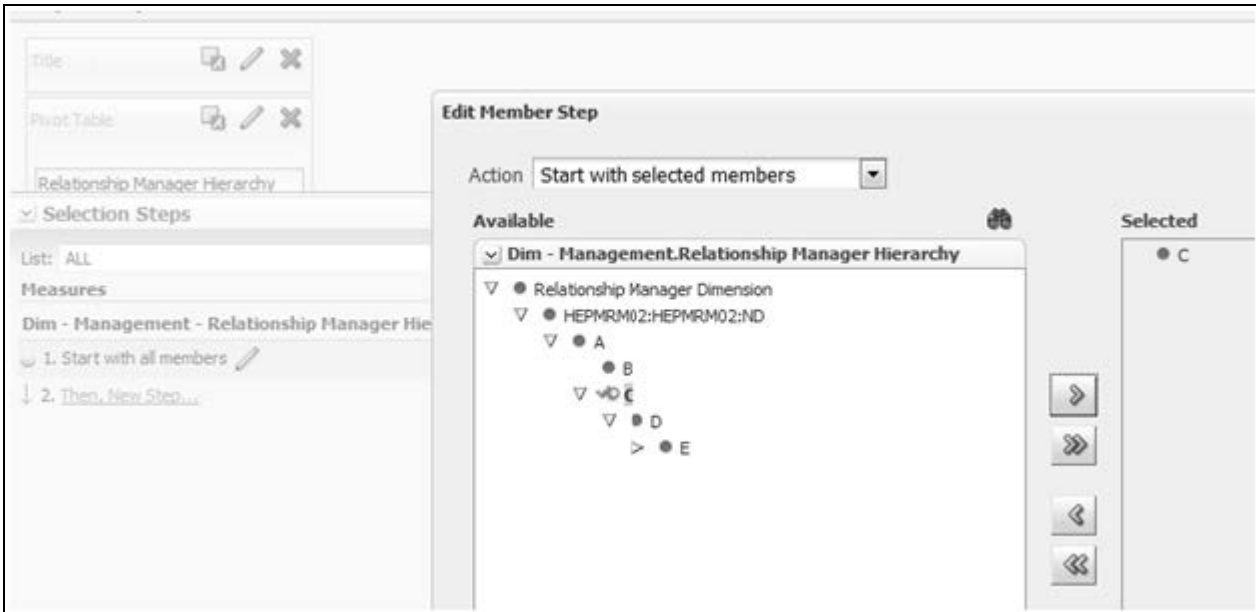


As a result, the user will be able to see the data related to the manager.

Relationship Manager Hierarchy	Direct Movement
∇ C	-827.25
∇ D	-827.25
∇ E	-827.25
F	-1611.25

Metadata

Technical Metadata

The attached excel sheet lists the SCD's packaged in the IPA application.

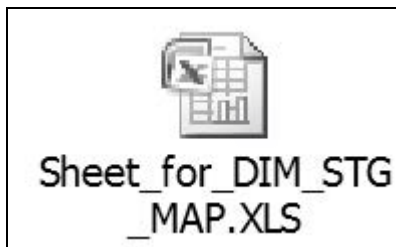

The attached excel sheet lists the Institutional Performance Analytics technical metadata.



Optional Metadata

The following excel sheet lists the technical metadata related to PFT account summary.



The following excel sheet lists the technical metadata related to FTP account summary.



Business Metadata

The attached excel sheet lists the Oracle Financial Services Institutional Performance Analytics BI 6.0 Business Metadata.



Reporting Metadata

The attached excel sheet lists the Customer Attributes.



The attached excel sheet lists the IPA-RPD-Webcat metadata.



APPENDIX B *How to Add a New Measure*

This appendix discusses the following topics:

- [Introduction](#)
- [Measure Definition Process](#)
- [Build Cube](#)

Introduction

This section details the steps to be performed by the user for adding a new measure to the cube. As a prerequisite, the fact table needs to have the column that holds values for the new measure.

Measure Definition Process

Step 1 – Add Business Measure

5. From **Unified Metadata Manager**, select **Business Metadata Management**, then select **Business Measures**.
6. From Business Measures, click **Add** to create a Business measure definition. In the Business Measure Definition (Add mode) window, select **Aggregation Function**. Aggregation Function can be:
 - SUM – for summing up the values in the column of the fact table.
 - COUNT – for determining the number of records in the fact table.
 - MAXIMUM – for identifying the maximum value of a column in the fact table.
 - MINIMUM – for identifying the minimum value of a column in the fact table.
 - COUNT DISTINCT – for determining the distinct count of records in the fact table.
7. Specify if this measure needs to be rolled up against hierarchies.
8. Select the fact table as part of the Entity.
9. Select the column of the fact table as part of the Attribute. This column will hold the value of the measure.
10. Specify Business Exclusions and Filters, if required.
11. Save the measure.

Business Measure Details	
Code *	MEPM001
Short Description *	EOP Balance
Long Description	End of period balance

Business Measure Definition	
Aggregation Function	SUM
Roll up	<input checked="" type="checkbox"/>
Entity	
Attribute	
Business Exclusions	
Filter Expression	

For more information on Business Measures, see Business Measures under Unified Metadata Manager chapter in *Oracle Financial Services Analytical Applications Infrastructure 7.3 User Guide*.

Step 2 – Modify Cube Definition

1. From **Unified Metadata Manager**, select **Business Metadata Management**, then select **Cube**.
2. Identify the cube that needs to be modified.
3. Edit the cube definition.
4. Add the new measure.
5. Map the measures to the to the required dimensions.
6. Save the cube definition.

Build Cube

Assuming that the dimension table and fact table is loaded with relevant data, cube can be built.

Define batch to execute the CREATE CUBE component that will build the outline and load data in ESSBASE. For more information on executing the batch, see *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

APPENDIX C *How to Develop a New Cube*

This appendix discusses the following topics:

- [Introduction to Developing a New Cube](#)
- [Procedures to Develop a New Cube](#)

Introduction to Developing a New Cube

This section details the steps to be performed by the user for developing a new cube. Make sure that the existing cubes do not provide the required analytics / reporting coverage before deciding to define a new cube. In case user would like to see measures against a new dimension that is not part of the existing seeded metadata, then suggest including the new dimension as part of the existing cubes instead of creating a new cube. As a prerequisite, user should have defined datasets, measures, hierarchies and dimensions before defining a cube.

Procedures to Develop a New Cube

Step 1 – Add Cube

From **Unified Metadata Manager**, select **Business Metadata Management**, then select **Cube**. Specify the MDB details that will be created in ESSBASE.

Step 2 – Include Dimensions

Include dimensions that are part of the cube definition. Users mandatorily need to include TIME and MEASURE dimensions.

Step 3 – Specify Variations

Specify variations between each of the measures to the respective dimensions. All the measures that are part of the cube need not vary against all of the dimensions. Depending on business needs, variations can be specified to control the rollup of measures against a set of dimensions.

Step 4 – Specify Dataset

Specify dataset corresponding to the selected dimensions and measures. Data set will supply required data to the cube.

Step 5 – Specify Node Level Formula

If node level formula's are required to be specified for the nodes within the hierarchy, then they can be specified in this UI.

Step 6 – Save and Build

Save the cube. Define and execute batch in ICC to build the cubes.

For more information on Cubes, see Cubes under Unified Metadata Manager chapter in *Oracle Financial Services Analytical Applications Infrastructure 7.3 User Guide*.

APPENDIX D *How to Define a Batch*

This appendix discusses the following topics:

- [Introduction](#)
- [Batch Creation](#)

Introduction

Batch refers to a set of executable processes based on a specified rule. Batch Maintenance framework within OFSAAI facilitates you to create and maintain the Batch Definitions. You can process the Batch scheduled for execution from Batch Maintenance and also from other modules.

You need to have Data Centre Manager function role mapped to access the Operations framework within OFSAAI. You can access Batch Maintenance by expanding Operations section within the tree structure of LHS menu. The *Batch Maintenance* window displays a list of Batches scheduled for maintenance with the other details such as Batch ID, Batch Description, and the editable state of the Batch.

Batch Creation

You can create a batch from the *Batch Maintenance* screen as mentioned below:

1. From the OFSAAI **Home** menu, navigate to **Operations > Batch Maintenance**.
2. In the *Batch Maintenance* window, Select '+' button from the *Batch Name* tool bar.

The *New Batch Definition* window is displayed.

3. Enter the Batch details as tabulated.

Table 35. Batch Details

Field	Description
Batch Name	The Batch Name is auto generated by the system. You can edit to specify a Batch name based on the following conditions: <ul style="list-style-type: none">● The Batch Name should be unique across the Information Domain.● The Batch Name must be alpha-numeric and should not start with a number.● The Batch Name should not exceed 41 characters in length.● The Batch Name should not contain special characters "." and "-".
Batch Description	Enter a description for the Batch based on the Batch Name.

Table 35. Batch Details

Duplicate Batch	(Optional) Select the checkbox to create a new Batch by duplicating the existing Batch details. On selection, the Batch ID field is enabled.
Batch ID (If duplicate Batch is selected)	It is mandatory to specify the Batch ID if Duplicate Batch option is selected. Select the required Batch ID from the list.
Sequential Batch	Select the check box if the Batch has to be created sequentially based on the task specified. For example, if there are 3 tasks defined in a Batch, task 3 should have precedence as task 2, and task 2 should have precedence as task 1.

4. Click **Save** to save the Batch definition details.

The new Batch definition details are displayed in the *Batch Name* section of *Batch Maintenance* window with the specified **Batch ID**.

Note: For a more comprehensive coverage of configuration and execution of a batch, refer to the *Operations* Chapter in *Oracle Financial Services Analytical Applications Infrastructure User Guide*.

APPENDIX E *List of Hard-Coded Members*

List of Hard-Coded Members

Following are the dimension members that are hard-coded within the application.

Table 36. Hard-coded members

Table Name	Column Name	Expected Values
DIM_CUSTOMER_TYPE	V_CUST_CATEGORY	C
FCT_CRM_ACCOUNT_SUMMARY	V_SCENARIO_CODE	PLAN, BUDGET
FCT_OPPORTUNITY_ACTIVITY	V_ACTIVITY_STATUS	O, C
DIM_BANDS	V_BAND_TYPE	AGEONBOOK TURNOVER
FCT_ACCOUNT_PROFITABILITY	N_REP_LINE_CD	98000 - Net Income Before Taxes 98500 - Tax Expense 99000 - Net Income After Taxes 107100 - Number of Customers 107130 - Number of Open Customers 107200 - Number of Accounts 107230 - Number of Open Accounts 107300 - Attrition Rate

APPENDIX F *Run Rule Framework*

This appendix discusses the following topics;

- [Introduction](#)
- [Executing a seeded run](#)
- [Runs available for IPA](#)


Introduction

In cases where data is required to be loaded for fact tables in multiple runs, the OFSAAI Rule Run Framework comes in handy. For example, for population of FCT_CRM_ACCOUNT_SUMMARY, the parameters of the batch execution include a parameter \$RUNSK = -1. (Refer to the parameters of the batch ##INFODOM##_aCRM_CRM_Acc_Summ, Task1).


This batch execution loads the column N_RUN_SKEY in FCT_CRM_ACCOUNT_SUMMARY as -1. This will be a default run from the seeded batch. In order to be able to enter data for multiple runs, the batch tasks can be defined in Rule Run Framework. This will then create a batch internally which will load data for a different run into the fact table.

Executing a seeded run


1. Navigate to **Rule Run Framework > Run**.

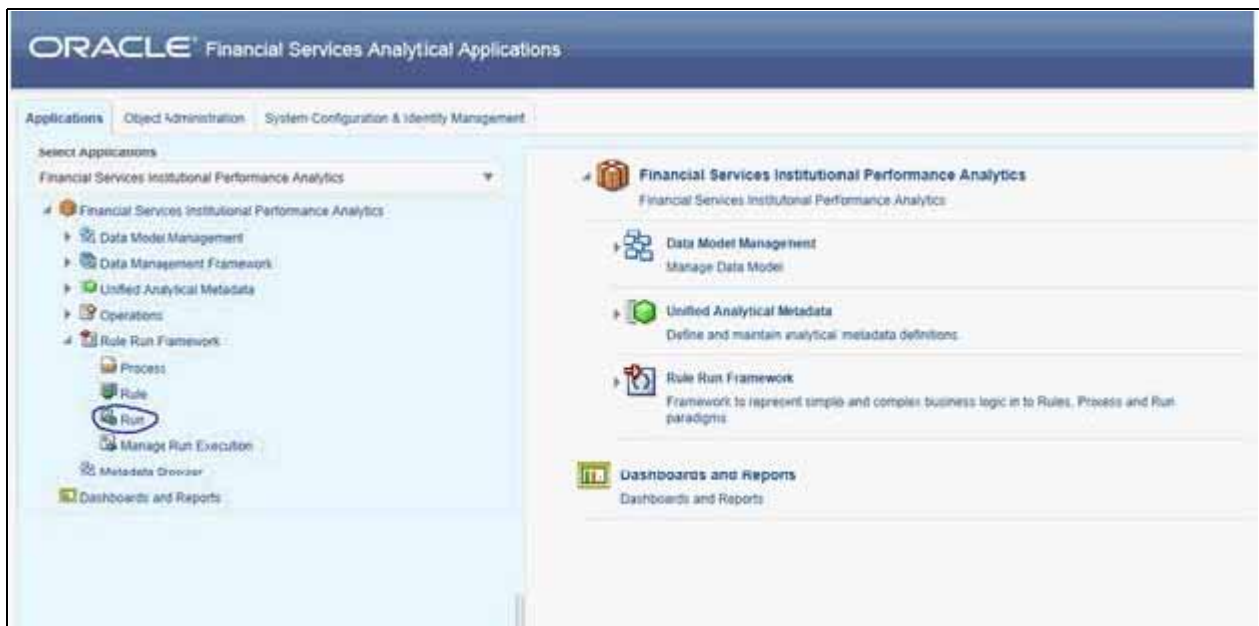

2. Choose a Run by checking the box before it and click **Fire Run**.

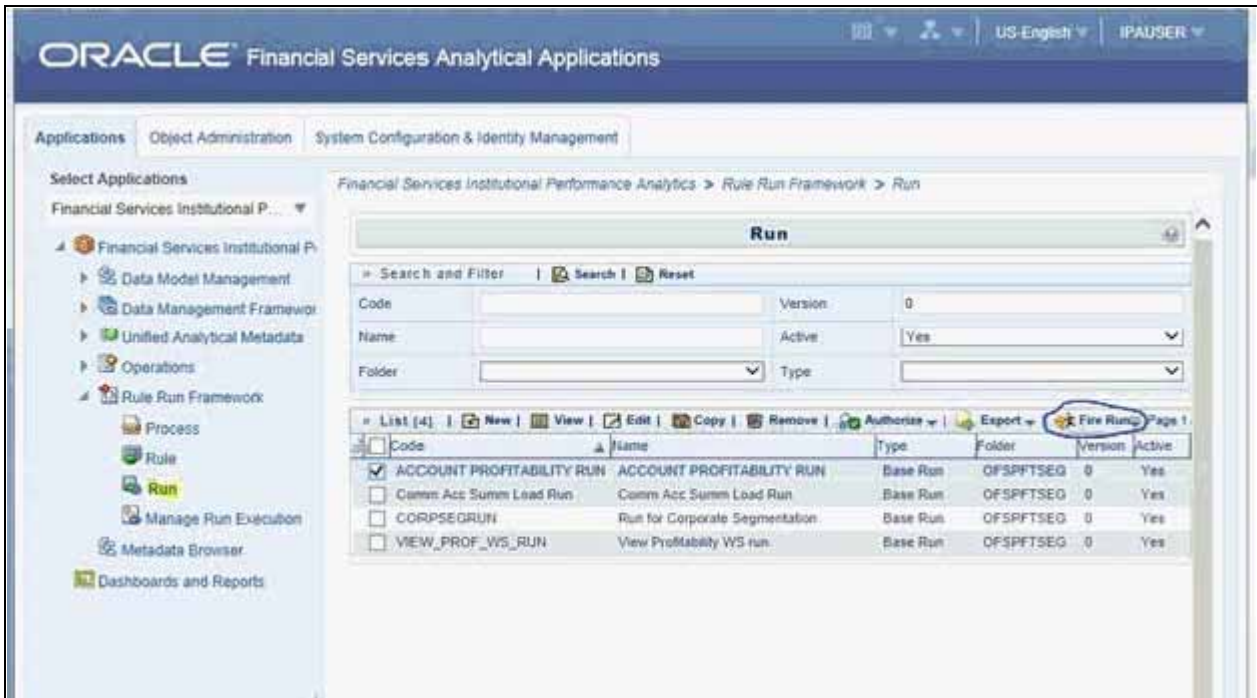


3. Enter the parameters required to execute the run (refer to details of individual runs) and click **OK**.

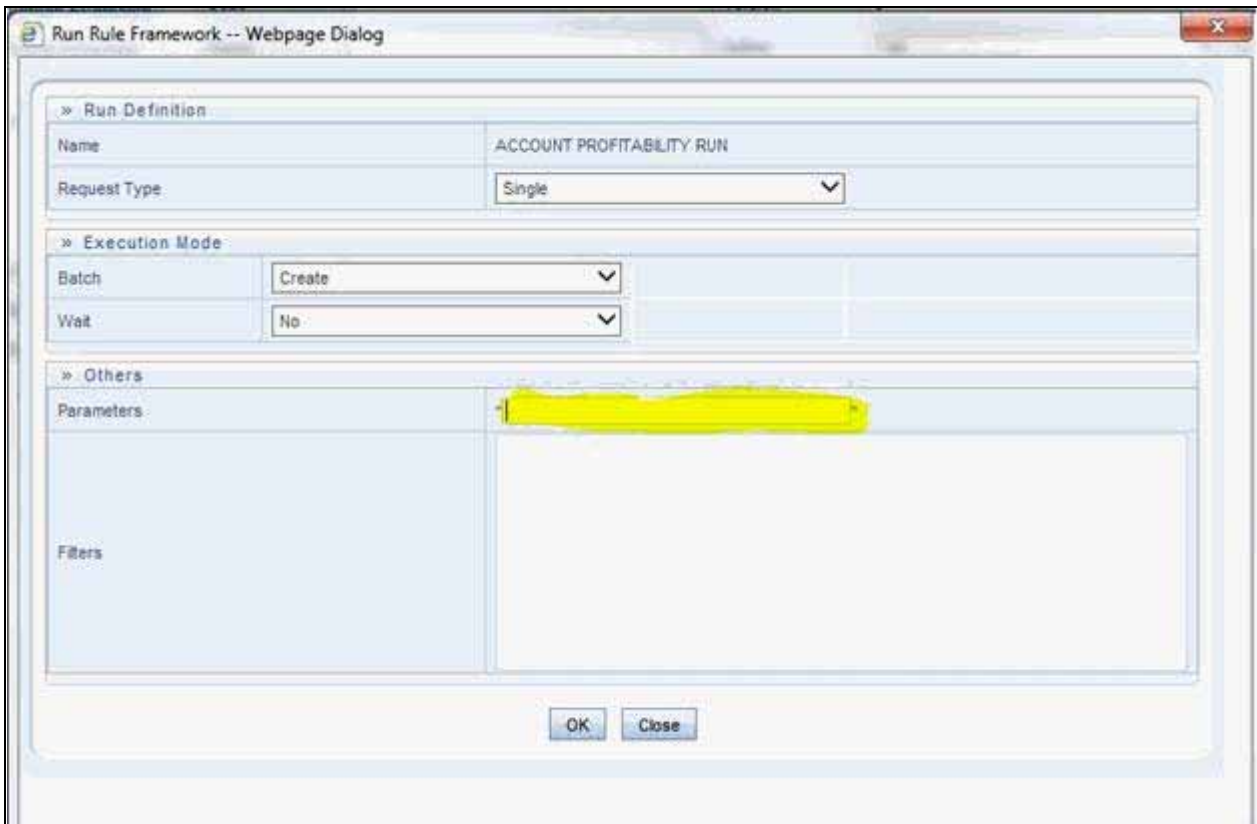

The following message will be displayed: *Fire run successful.*



4. Execute the batch by navigating to **Operations>Batch Execution** and select the latest batch created in the Run Rules Framework module.

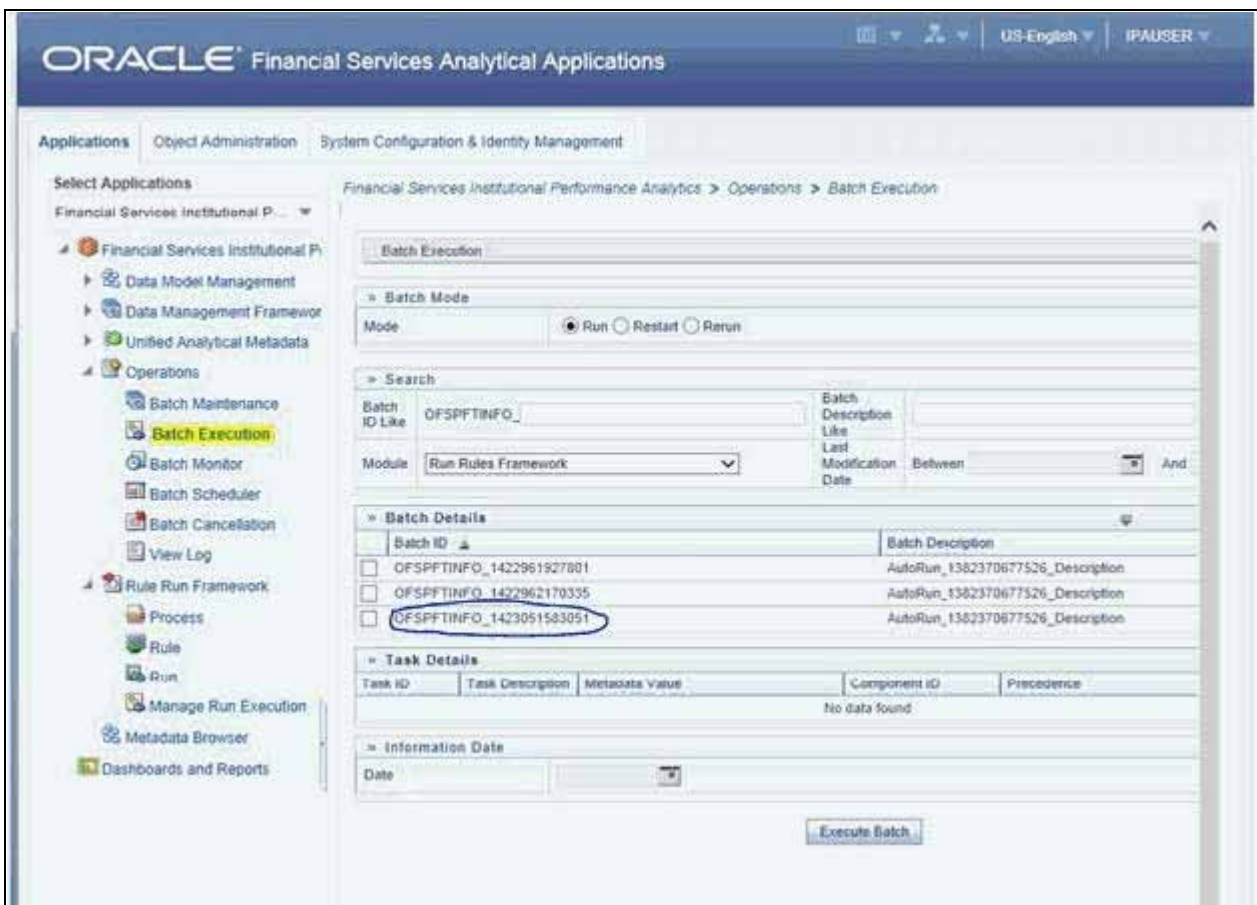

Runs available for IPA

Following are the runs available for IPA:

1. ACCOUNT PROFITABILITY RUN – Run for loading FCT_CRM_ACCOUNT_SUMMARY and FCT_ACCOUNT_PROFITABILITY

Parameters to be entered as follows:

##RCY##", "<INFODOM>", "FCT_ACCOUNT_PROFITABILITY

Note: There are no quotes at the beginning and the end of the string. Consider as if the quotes are enclosing the delimiter (comma).

2. Comm Acc Summ Load Run – Run for loading FCT_COMMON_ACCOUNT_SUMMARY
3. VIEW_PROF_WS_RUN – Run for executing Web Service
4. RETSEGRUN – Run for executing Retail Segmentation Rule

APPENDIX G *Loading Multiple Load Runs in OFSAA*

This chapter discusses the following topics:

- [Overview](#)
- [Features](#)
- [Design Details](#)
- [Data Transformations](#)

Overview

Multiple load run enables data to be loaded multiple times during the day for staggered processing of data by analytical applications. The degree of complexity of data required by analytical applications vary from one to the other, the load run ensures that the customer can process the data as soon as it is ready for an application to uptake. This reduces the turnaround time to reporting, by avoiding the 'end of day' type of processing of information as part of the original design.

Note: The load run is enabled only in the model and is defaulted to '0' in the model. This would not impact data previously available.

FSDf 8.0 staging model provides customers a flexibility to load multiple snapshots of the data in the staging tables (Product Processor's). A column named `n_load_run_id` was introduced as part of the primary key of the product processor tables to enable this. But the full fledged functionality to load and manage these snapshots will be part of the platform release at a later stage. Customers who would like to leverage this design in 8.0 release, the following mentioned changes will need to be done as a workaround to load multiple snapshot of data from staging to results tables such as Fact Common Account Summary.

For Loading Multiple Snapshots of Data for the same `FIC_MIS_DATE`, the existing T2T's need to be executed via Run Rule Framework and load needs to be filtered accordingly for each load run via the run filter. To enable execution of this run, navigate to `$FIC_HOME/ficweb/webroot/conf` and dit the file `excludeURLList.cfg` and add the following entry at the end of the file `[SQLIA].pr2`

Note: There should not be any blank line in the file

Features

Following are the features:

- To optimize the end-to-end data flow and the need for intra-day reporting, institutions could load intra-day records into OFSAA. Current application can only handle one set of records per date (incremental loads are not possible).
- Users need to adjust and reload data (either full or partial) for the current date.
- Users need to adjust and reload data (either full or partial) for any of past dates.

Design Details

Loading of data into OFSAA can be done in any of the following ways:

- ETL Tool
- OFSAA F2T
- OFSAA T2T
- OFSAA Excel upload
- OFSAA DIH

OFSAA data model includes load run identifier as part of the primary key for a set of staging tables. This enables data to be stored for multiple load runs for any date. OFSAA data model also has a table to maintain master information about load run and can be used for identifying/filtering load run during run execution within OFSAA. OFSAA data model also another entity that tracks the load run mapped to the functional key of each of the staging table. Since OFSAA processing is on snapshot of data, this entity helps users to identify set of records that are latest to be used in processing. If there is a need to load multiple sets of data within a day, customers can use the below components to manage the same.

If set of data is snapshot

- Register table that got loaded in the load run through a DT (Register_load_run_details)
- Register table that got loaded in the load run through a DT (Register_load_run_details)
- Use the load run identifier to load data into OFSAA staging. You can use the same load run identifier for all the entities loaded in the same batch/group.
- Specify run-filter during OFSAA execution to filter records for the maximum run identifier within the day

If set of data is incremental

- Register load run information in master table through a DT (Register_Load_Run_Master)
- Register table that got loaded in the load run through a DT (Register_load_run_details)
- Register table that got loaded in the load run through a DT (Register_load_run_details)
- Execute another DT (Populate_Load_Run_Map) with different parameters for each entity to maintain the latest load run for each record.
- Modify the T2T's to join with the load run map tables for identifying and filtering on the latest set of records to be used in processing.

There could be some entities that can follow snapshot and some entities incremental load. Decision of snapshot vs incremental depends on the above use-case.

Data Transformations

Function - Register Load Run

Parameters - Batch ID, MIS-Date, Load Run Name, Load Run Purpose, Load Run Type

Steps

1. Check if the parameters are valid. Load run type can be 'B – Base, A – Adjustments, P – Backdated adjustments'.
2. Check uniqueness of load run name. Load run name is a user-specified string for easier retrievals could be MIS-DATE <Sequence> or the starting timestamp of load run.
3. Increment the load run id for a given MISDATE and insert the rest of the details.
4. Return the load run identifier (if possible, else user will query this table to get the load run id given a name)
5. Log messages accordingly
6. Return success/failure

Execution

Execute this DT before loading any fact for intra-day load. Use the registered load run identifier as a value to map to load run identifier field in staging. When one load run is ongoing (loading data to OFSAA using the load run identifier), do not register any new load runs. Else, make sure load run name is used as a filter instead of max load run identifier when querying the load run master table.

Function – Register Load Run Details

Parameters – batch id, mis-date, load run name, load run id, stage table name, load type

Steps:

1. Check if the parameters are valid. Load type can be 'S – Snapshot, I - Incremental'.
2. Load run name or ID can be provided. If load run name is provided, we can lookup into load run master for retrieving the ID. Check if table name exist.
3. Register the information in load run details table
4. Log messages accordingly
5. Return success/failure

Execution

Execute this DT after registering load run master and before loading any fact for intra-day load. When one load run is ongoing (loading data to OFSAA using the load run identifier), do not register any new load runs.

Function – Populate Load Run Map

Parameters – batch id, mis-date, and stage table name

Steps:

1. Check if the parameters are valid.
2. Pick the corresponding load run map table from a setup table. Pick the corresponding functional key columns and their mapping to load run map table from a setup table.

3. If record do not exist in load run map table for the functional key in staging, then insert a new record with the functional key and load run identifier.
4. If record exist in load run map table for the functional key in staging, then update latest record indicator for existing rows to 'N' and then insert a new record with the functional key and load run identifier.
5. This operation has to be done in bulk mode.
6. Log messages accordingly
7. Return success/failure

Execution

Execute this DT after loading any fact for intra-day load in case the table has incremental loads.

Multiple data runs can be done for the same date using one of the following two approach:

1. Using the Load Run ID, multiple data runs can be done for the same date. By default, the load run ID will be 0.
2. There will be multiple run_skeys generated for each extraction date. If there are four sources, then 4 distinct run skeys are generated for the load date. Some of the out of box dashboards will show partial data as there is a filter for the Run. If all the sources need to be seen at a time, the processing should happen in a single run.
3. All the T2T's which are loading data into Fact CRM Account Summary has to be modified for ANSI Join conditions to include table DIM_DATA_ORIGIN
4. The Existing process "ACCOUNT PROFITABILITY PROCESS" is modified to have all the T2T's which are loading data into Fact Common Account Summary. All the T2T's which are loading data into Fact Common Account Summary are set as Precedence for the existing task "FN_RUN_EXE_PARAM".
5. A new UMM regular BI Enabled hierarchy with only one level is created based on entity "DIM_DATA_ORIGIN".
6. New run definitions will be created for each data source which would be based on the same process "ACCOUNT PROFITABILITY PROCESS". Each run definitions would be set to have data source as the filter using the hierarchy defined earlier.

For example if there are 3 sources then,

- ACCOUNT PROFITABILITY Src1 with "Source1" as the filter
 - ACCOUNT PROFITABILITY Src2 with "Source2" as the filter
 - ACCOUNT PROFITABILITY Src3 with "Source3" as the filter
7. After defining the Run definitions, the run's are executed for the required MIS date. This approach requires as many run definitions for each of the sources which has to be processed at once. Each Run definition execution would be storing its Run Skey value in the target fact table.
 8. Modify the existing DT "FCT_ACCT_TRANSFORMATION" for passing additional parameters to PL/SQL function "FN_FCT_ACCT_PFT_DT".
 9. Grant Select privileges on few tables from Config schema user to atomic schema user.
 10. Create Database views in atomic schema.

Following are the details of the approach:

1. All the T2T's which are loading data into Fact CRM Account Summary has to be modified for ANSI Join conditions to include table DIM_DATA_ORIGIN.

- Navigate to Database Extracts and to the required Application & Data Source.
- Select T2T T2T_STG_CRMAS_ANNUITY_CONTRACTS and Edit the definition.
- Modify the ANSI join condition by appending the following:

```
LEFT OUTER JOIN DIM_DATA_ORIGIN ON  
DIM_DATA_ORIGIN.V_DATA_SOURCE_CODE =  
STG_ANNUITY_CONTRACTS.V_DATA_ORIGIN
```

- Save the T2T definition.
- Similarly do the changes for the other T2T's

```
T2T_STG_CRMAS_BILLS_CONTRACTS  
T2T_STG_CRMAS_BORROWINGS  
T2T_STG_CRMAS_CARDS  
T2T_STG_CRMAS_CASA  
T2T_STG_CRMAS_INVESTMENTS  
T2T_STG_CRMAS_LC_CONTRACTS  
T2T_STG_CRMAS_LOAN_CONTRACTS  
T2T_STG_CRMAS_MM_CONTRACTS  
T2T_STG_CRMAS_OD_ACCOUNTS  
T2T_STG_CRMAS_TD_CONTRACTS  
T2T_STG_CRMAS_LEASES_CONTRACTS  
T2T_STG_CRMAS_GUARANTEES  
T2T_STG_CRMAS_TRUSTS  
T2T_STG_CRMAS_COMMITMENTS  
T2T_STG_CRMAS_MUTUAL_FUNDS
```

2. The Existing process "ACCOUNT PROFITABILITY PROCESS" is modified to have all the T2T's which are loading data into Fact Common Account Summary. All the T2T's which are loading data into Fact Common Account Summary are set as Precedence for the existing task "FN_RUN_EXE_PARAM".

- Edit the "ACCOUNT PROFITABILITY PROCESS".
- Select the "Component" button.
- Navigate to **Component>Insertion Rules><Source>** section from the LHS menu.
- Select the T2T's which load data into Fact Common Account Summary.

```
T2T_STG_ANNUITY_CONTRACTS_CAS  
T2T_STG_BILLS_CAS  
T2T_STG_BORROWINGS_CAS  
T2T_STG_CARDS_CAS
```

T2T_STG_CASA_CAS

T2T_STG_GUARANTEES_CAS

T2T_STG_INVESTMENTS_CAS

T2T_STG_LC_CAS

T2T_STG_LEASES_CONTRACTS_CAS

T2T_STG_LOANS_CAS

T2T_STG_MM_CAS

T2T_STG_OD_CAS

T2T_STG_TD_CONTRACTS_CAS

T2T_STG_TRUSTS_CAS

T2T_STG_COMMITMENT_CONTRACTS_CAS

T2T_STG_MUTUAL_FUNDS_CAS

- Select Precedence button and select FN_RUN_EXE_PARAM from the drop-down. All the T2T's which are loading data into Fact Common Account Summary are set as Precedence for the existing task "FN_RUN_EXE_PARAM".

T2T_STG_ANNUITY_CONTRACTS_CAS

T2T_STG_BILLS_CAS

T2T_STG_BORROWINGS_CAS

T2T_STG_CARDS_CAS

T2T_STG_CASA_CAS

T2T_STG_GUARANTEES_CAS

T2T_STG_INVESTMENTS_CAS

T2T_STG_LC_CAS

T2T_STG_LEASES_CONTRACTS_CAS

T2T_STG_LOANS_CAS

T2T_STG_MM_CAS

T2T_STG_OD_CAS

T2T_STG_TD_CONTRACTS_CAS

T2T_STG_TRUSTS_CAS

T2T_STG_COMMITMENT_CONTRACTS_CAS

T2T_STG_MUTUAL_FUNDS_CAS

- Save the process definition as same version.

3. A new UMM regular BI Enabled hierarchy with only one level is created based on the entity "DIM_DATA_ORIGIN".

- Create a new hierarchy as mentioned in the following:
 - After the hierarchy is defined, Authorize and save the metadata. Ensure data exists in DIM_DATA_ORIGIN before saving the metadata.
4. New run definitions will be created for each data source which would be based on the same process "ACCOUNT PROFITABILITY PROCESS". Each run definitions would be set to have data source as the filter using the hierarchy defined earlier.

For example if there are 3 sources then,

- ACCOUNT PROFITABILITY Src1 with "Source1" as the filter
- ACCOUNT PROFITABILITY Src2 with "Source2" as the filter
- ACCOUNT PROFITABILITY Src3 with "Source3" as the filter
- Create a new run definition say "ACCOUNT PROFITABILITY Source 1" as the run definition name.
- Code: AccountProfitabilitySrc1
- Name: Account Profitability Source 1

Type: Base Run

- Select **Add>Job**
- Select the process modified earlier from the LHS menu.
- Select **Add>Run Condition**
- Select Data Origin from the LHS menu.
- After selecting Run Condition and Job, select **Next**.
- Add the condition to Run Condition by selecting the "Launch Browser".
- Select the required source from the LHS menu.
- Select **Save**.
- Similarly, new run definitions have to be defined for each source that the user
- want to process, by repeating the above mentioned process.

5. Grant Select privileges on few tables from Config schema user to atomic schema user.

```
pr2_run_object_member
metadata_master
metadata_element_master
metadata_attribute_master
metadata_locale_master
```

Execute the script "ConfigPrevsRunFilter.sql" by modifying the file. Replace the values ##ATOMIC_USER## with actual Atomic Schema user.

ConfigPrevsRunFilter.sql

```
GRANT SELECT ON pr2_run_object_member to ##
/
ATOMIC_USER##/GRANT SELECT ON metadata_master to ##
/
```

```
ATOMIC_USER##/GRANT SELECT ON metadata_element_master to ##  
/  
ATOMIC_USER##/GRANT SELECT ON metadata_attribute_master to ##  
/  
ATOMIC_USER##/GRANT SELECT ON metadata_locale_master to ##ATOMIC_USER##  
/
```

6. Create Database views in atomic schema which are required.

Execute the script "Create_Run_Filter_Views.sql" by modifying it. Replace the values ##CONFIG_USER## with actual Config schema user and ##INFODOM## with the Infodom name.

Create_Run_Filter_Views.sql

```
CREATE OR REPLACE VIEW Vw_pr2_run_object_member AS SELECT * FROM  
##CONFIG_USER##.pr2_run_object_member WHERE v_infodom_name =  
'##INFODOM##'  
/  
CREATE OR REPLACE VIEW VW_metadata_master AS SELECT * FROM  
##CONFIG_USER##.metadata_master WHERE dsn_id = '##INFODOM##'  
/  
CREATE OR REPLACE VIEW VW_metadata_element_master AS SELECT * FROM  
##CONFIG_USER##.metadata_element_master WHERE v_metadata_infodom =  
'##INFODOM##'  
/  
CREATE OR REPLACE VIEW VW_metadata_attribute_master AS SELECT * FROM  
##CONFIG_USER##.metadata_attribute_master WHERE v_metadata_infodom =  
'##INFODOM##'  
/  
CREATE OR REPLACE VIEW VW_metadata_locale_master AS SELECT * FROM  
##CONFIG_USER##.metadata_locale_master WHERE metadata_infodom =  
'##INFODOM##'  
/
```

7. Modify the PL/SQL function "FN_FCT_ACCT_PFT_DT." Execute the script " FN_FCT_ACCT_PFT_DT.sql" in atomic schema.

8. Modify the existing DT "FN_FCT_ACCOUNT_PFT" for passing additional parameters to PL/SQL function "FN_FCT_ACCT_PFT_DT"

- Navigate to Post Load transformation screen.
- Edit the definition "FCT_ACCT_TRANSFORMATION".
- Navigate to Stored Procedure section.
- Copy and paste the contents of the file "fn_fct_acct_pft.sql" into Stored Procedure Editor Section and save the definition.
- Execute the Run's as required.

