

**Scenario Wizard**  
**Configuration Guide**  
**Release 8.1.2.5.0**  
**June 2023**  
**E86105-05**

**ORACLE**  
Financial Services

## Scenario Wizard

Copyright © 2015, 2023, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired. For information on third party licenses, click [here](#).

## Document Control

**Table 1: Document Control**

Version Number	Revision Date	Change Log
8.1.2.5.0	June 2023	There are no updates to this guide in this release.
8.1.2.4.0	March 2023	There are no updates to this guide in this release.
8.1.2.3.0	December 2022	There are no updates to this guide in this release.
8.1.2.2.0	September 2022	There are no updates to this guide in this release.
8.1.2.1.0	June 2022	Renamed the Threshold Analyzer utility to Scenario Tuning.
8.1.2.0.0	October 2021	There are no updates to this guide in this release.
8.1.1.0.0	October 2021	There are no updates to this guide in this release.
8.0.8.1.0	April 2020	There are no updates to this guide in this release.

---

## Table of Contents

<b>1</b>	<b>About this Guide.....</b>	<b>7</b>
1.1	Who Should Use this Guide.....	7
1.2	How this Guide is Organized.....	7
1.3	Where to Find More Information.....	7
1.4	Conventions Used in this Guide.....	8
<b>2</b>	<b>About Scenario Wizard .....</b>	<b>9</b>
2.1	Introduction.....	9
2.1.1	Features .....	9
<b>3</b>	<b>Template XML Files .....</b>	<b>10</b>
3.1	Overview.....	10
3.2	Introduction to XML files.....	10
3.3	Mapping Relationship between XML Files.....	10
3.4	Configuring the Template XML files.....	11
<b>4</b>	<b>Scenario Focus Mapping (ScenarioFocusMapping.xml).....</b>	<b>13</b>
4.1	Tags.....	13
4.1.1	<scenarioFocusMap> .....	13
4.1.2	<scenarioClass> .....	14
4.1.3	<focus> .....	15
4.1.4	<focus_name> .....	15
4.1.5	<focus_code> .....	16
4.1.6	<associatedRecord> .....	16
4.1.7	<record_name> .....	19
4.1.8	<table> .....	19
4.1.9	<table_name> .....	19
4.1.10	<display_name> .....	19
4.1.11	<isPrimary> .....	19
4.1.12	<isSelected> .....	20
<b>5</b>	<b>Threshold (threshold.xml).....</b>	<b>21</b>
5.1	Pre-defined Threshold.....	21
5.2	Tags.....	22

---

5.2.1	<threshold-data> .....	22
5.2.2	<threshold_list> .....	22
5.2.3	<tshld_name> .....	23
5.2.4	<min_value> .....	23
5.2.5	<max_value> .....	23
5.2.6	<default_value> .....	23
5.2.7	<value_type_code> .....	23
5.2.8	<value_unit> .....	24
5.2.9	<current_value> .....	24
5.2.10	<display_name> .....	24
5.2.11	<description> .....	24
<b>6</b>	<b>TA Column Map (TAColumnMap.xml).....</b>	<b>26</b>
6.1	User-defined Highlight .....	27
6.2	Tags.....	28
6.2.1	<taScnroGroupMap> .....	28
6.2.2	<taColumnMap> .....	28
6.2.3	<taColumnDef> .....	29
6.2.4	<columnName> .....	29
6.2.5	<displayName> .....	29
6.2.6	<type> .....	29
6.2.7	<precision> .....	29
<b>7</b>	<b>Data Set Rule Map (datasetrulemap.xml) .....</b>	<b>30</b>
7.1	Primary Rule Dataset .....	32
7.2	Dataset Attributes for Primary Rule Dataset .....	33
7.3	Pre-defined Highlight.....	34
7.4	Pre-defined Threshold.....	36
7.5	Primary Rule Dataset Query.....	37
7.6	Tags.....	41
7.6.1	<dataSetRuleMap> .....	41
7.6.2	<datasetsql> .....	41
7.6.3	<scnro_class_cd> .....	42

---

7.6.4	<attribute> .....	42
7.6.5	<attribute_key_flag> .....	42
7.6.6	<attribute_name_flag> .....	43
7.6.7	<focalAttribute> .....	43
7.6.8	<tableList> .....	43
7.6.9	<tableName> .....	43
7.6.10	<primaryRule> .....	43
7.6.11	<threshold> .....	44
7.6.12	<tshld_name> .....	44
7.6.13	<primary_rule_name> .....	44
7.6.14	<primary_rule_desc> .....	44
7.6.15	<role> .....	44
7.6.16	<defaultTestColName> .....	45
7.6.17	Test Scenario - Default Test Result Columns .....	45
7.7	Sub-Rule Dataset.....	48
<b>8</b>	<b>Embedding Queries in XML.....</b>	<b>50</b>
<b>9</b>	<b>Using Functions in Query .....</b>	<b>52</b>
<b>10</b>	<b>Nested Query.....</b>	<b>56</b>

# 1 About this Guide

This guide explains the structure behind the Oracle Financial Services Scenario Wizard and provides comprehensive instructions for configuring modifiable components.

This chapter focuses on the following topics:

- [Who Should Use this Guide](#)
- [How this Guide is Organized](#)
- [Where to Find More Information](#)
- [Conventions Used in this Guide](#)

## 1.1 Who Should Use this Guide

The *Scenario Wizard Configuration Guide* is designed for use by application users and client personnel who have a working knowledge of eXtensible Markup Language (XML) and UI software components. Their roles and responsibilities, as they operate within the Oracle Financial Services Enterprise Case Management, include the following:

- **Data Miner:** Configures, maintains, and adjusts the Oracle Financial Services Behavior Detection Framework and Oracle Financial Services Alert Management user interface, and is usually an employee of a specific Oracle Financial Services customer.

## 1.2 How this Guide is Organized

The *Scenario Wizard Configuration Guide* includes the following chapters:

- [About Scenario Wizard](#), provides a brief introduction about the Oracle Financial Services Scenario Wizard tool.
- [Template XML Files](#), explains the Template XML files, their structure, content, and inter-relationship. It also describes the configurations that need to be done for scaling out-of-the-box options.
- [Scenario Focus Mapping \(ScenarioFocusMapping.xml\)](#), explains about the different configurations using `ScenarioFocusMapping.xml` file.
- [Threshold \(threshold.xml\)](#), describes the tags used by the `threshold.xml` file.
- [TA Column Map \(TAColumnMap.xml\)](#), describes the tags used by the `TAColumnMap.xml` file.
- [Data Set Rule Map \(datasetrulemap.xml\)](#), explains about the different configurations using `datasetrulemap.xml` file.
- [Embedding Queries in XML](#) shows how to edit XML with simple SQL query.
- [Using Functions in Query](#) shows the usage of aggregate functions inside SQL query.
- [Nested Query](#) shows the usage of nested query inside the SQL.

## 1.3 Where to Find More Information

For more information about Oracle Financial Services Behavior Detection Framework, refer to the following documents:

- Administration Guide
- Administration Tools User Guide

- Scenario Manager User Guide
- Installation Guide
- Alert Management User Guide

These documents can be found at the following link:

[http://docs.oracle.com/cd/E60570\\_01/homepage.htm](http://docs.oracle.com/cd/E60570_01/homepage.htm)

To learn more about Oracle Financial Services and our complete product line, refer to our Web site [www.oracle.com/financialservices](http://www.oracle.com/financialservices).

## 1.4 Conventions Used in this Guide

Table 2 lists the conventions used in this guide.

**Table 2: Conventions Used in this Guide**

Convention	Meaning
Italics	<ul style="list-style-type: none"> <li>• Names of books, chapters, and sections as references</li> <li>• Emphasis</li> </ul>
Bold	<ul style="list-style-type: none"> <li>• Object of an action (menu names, field names, options, button names) in a step-by-step procedure</li> <li>• Commands typed at a prompt</li> <li>• User input</li> </ul>
Monospace	<ul style="list-style-type: none"> <li>• Directories and subdirectories</li> <li>• File names and extensions</li> <li>• Process names</li> <li>• Code sample, including keywords and variables within text and as separate paragraphs, and user-defined program elements within text</li> </ul>
<Variable>	Substitute input value



## 2 About Scenario Wizard

The Oracle Financial Services Scenario Wizard is a tool that allows business users to create scenarios that run within the Oracle Financial Services Behavior Detection Framework.

### 2.1 Introduction

Scenario wizard provides a sequence of screens that leads the user through a series of well-defined steps for creating or editing a scenario. Every screen exposes only that information which can easily be understood by any business user.

At any point the user should enter or select only business related information and is shielded from complex technicalities involved with any scenario. The complete logic of the scenario is built by the system dynamically, based on the user inputs and even without the user realizing it. In effect, any business logic is executed as one or more SQL queries and these queries are constructed by the system for the user.

#### 2.1.1 Features

- Scenarios are created based on pre-defined templates of scenario classes, focuses and combinations of data that may be examined for behaviors of interest.
- Wizard-like interface allows novice users to create fully functional scenarios
- Easy launch option using Java Web Start (from admin tools)
- Architected using web service to ensure UI remains technology agnostic
- SSL communication ensures confidential data is secure over wire
- Ability to execute test runs of the created scenario against business data

## 3 Template XML Files

This chapter explains the Template XML files, their structure, content, and inter-relationship. It also describes the configurations that should be done for scaling out-of-the-box options. These template XML files provide the base framework on which the Scenario Wizard runs.

This chapter discusses the following topics:

- [Overview](#)
- [Introduction to XML files](#)
- [Mapping Relationship between XML Files](#)
- [Configuring the Template XML files](#)

### 3.1 Overview

All the dynamic data (information and definition) that display in the Scenario Wizard UI is configured in the Template XML files. These XML files also contain the SQL queries for datasets, relationships, and mapping information required for building a valid scenario that can be executed by the algorithm for generating alerts.

### 3.2 Introduction to XML files


The Scenario Wizard uses the following Template XML files as part of the base template framework:

- `ScenarioFocusMapping.xml` - Mapping between scenario class, focus, and associated data. For more information, refer to [Scenario Focus Mapping \(ScenarioFocusMapping.xml\)](#), on page 13.
- `datasetrulemap.xml` - Contains dataset SQL, dataset attributes, mapping for thresholds/highlights for scenarios. For more information, refer to [Data Set Rule Map \(datasetrulemap.xml\)](#) on page 30.
- `threshold.xml` - Metadata for pre-defined thresholds. For more information, refer to [Threshold \(threshold.xml\)](#).
- `TAColumnMap.xml` - Metadata for user-defined highlights. For more information, refer [TA Column Map \(TAColumnMap.xml\)](#).

### 3.3 Mapping Relationship between XML Files

Every template XML file contains a specific type of information to be used by the system to build a scenario. Some template XML files are independent units whereas some are dependent on others.

The following figure illustrates the relationship among the XML files:

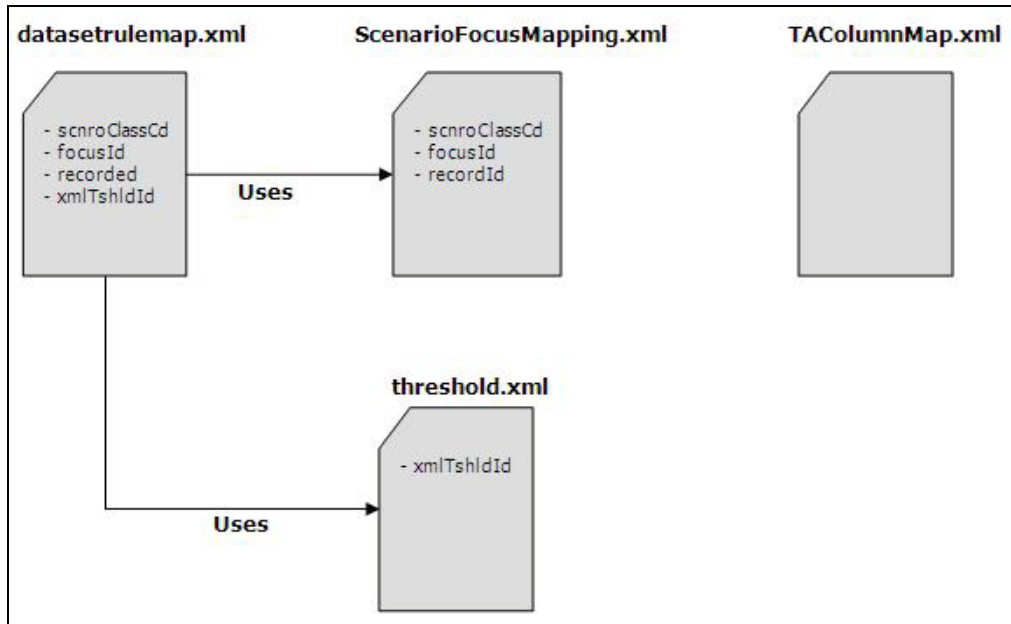

**Figure 1: Relationship between XML files**

The `TAColumnMap.xml` file contains information regarding user-defined highlights. It is not related to the other three XML files in any way. It neither looks up information nor it is referred from other files.

The `Threshold.xml` file contains definitions for pre-defined thresholds. It is complete in itself and does not look up any other XML file for information. However, this file is not independent. The thresholds defined here are referred in the `datasetrulemap.xml` file using `xmlTshldId`.

The `ScenarioFocusMapping.xml` file specifies various combinations of scenario class, focus, and associated data. It also lists all the tables included with an associated data. This XML file is dependent on the `Datasetrulemap.xml` file for actual business logic for a specified combination of scenario class, focus, and associated data. The system uses the `scnroClassCd`, `focusId`, and `recordId` fields for mapping between the `ScenarioFocusMapping.xml` and `datasetrulemap.xml` files.

## 3.4 Configuring the Template XML files

The Scenario Wizard application supports deployment on Tomcat, WebLogic and WebSphere servers. While installing Scenario Wizard, you must specify the name `SMLiteWeb` for the context root of the application.

As per the business need, you may modify template XML files to change the out-of-box scenario or configure a new scenario.

In order for the Scenario Wizard UI to reflect the changes made, follow these steps:

1. Login to the Tomcat, WebLogic or WebSphere sever.
2. Stop the server (if it is already running).
3. Change the directory to the following path:
  - For Tomcat Server:
 

```
$CATALINA_HOME/webapps/<context root specified during installation>/WEB-INF/classes/.
```

- For WebLogic Server:  
`<WebLogic Server Home>/profiles/profile_name/<WebLogic Domain Name>/applications/SMLiteWeb.war/WEB-INF/classes/`
  - For WebSphere Server:  
`<WebSphere Server Home>/profiles/Profile_name/installedApps/ Profile_name/SMLiteWeb_war.ear/SMLiteWeb.war/WEB-INF/classes`
4. Verify if the present directory contains a folder named *resources*. If not, create this new folder.
  5. Copy the modified template files to the *resources* folder.
    - For Tomcat Server:  
`($CATALINA_HOME/webapps/<context root specified during installation>/WEB-INF/classes/resources/)`
    - For WebLogic Server:  
`(<WebLogic Server Home>/profiles/profile_name/<WebLogic Domain Name>/applications/SMLiteWeb.war/WEB-INF/classes/ resources/)`
    - For WebSphere Server:  
`(<WebSphere Server Home>/profiles/Profile_name/ installedApps/Profile_name/SMLiteWeb_war.ear/SMLiteWeb.war/ WEB-INF/classes/resources/)`
  6. Start the server.  
The Scenario Wizard UI displays the modified or added scenarios and any related entities.

## 4 Scenario Focus Mapping (ScenarioFocusMapping.xml)

This chapter focuses on Scenario focus mapping. It explains about the different configurations using ScenarioFocusMapping.xml file.

In Scenario Wizard, a scenario is uniquely identified by its scenario class, focus, and the associated data. It also allows configuring new scenario classes, focuses, and associated data, which results in newer combinations defining newer scenarios.

The ScenarioFocusMapping.xml file allows the following configurations:

- Available scenario classes
- Allowed focuses for a specific scenario class
- Associated data options for a specific scenario class and focus combination
- Records to match for a particular associated data

The following figure illustrates the structure of ScenarioFocusMapping.xml file:

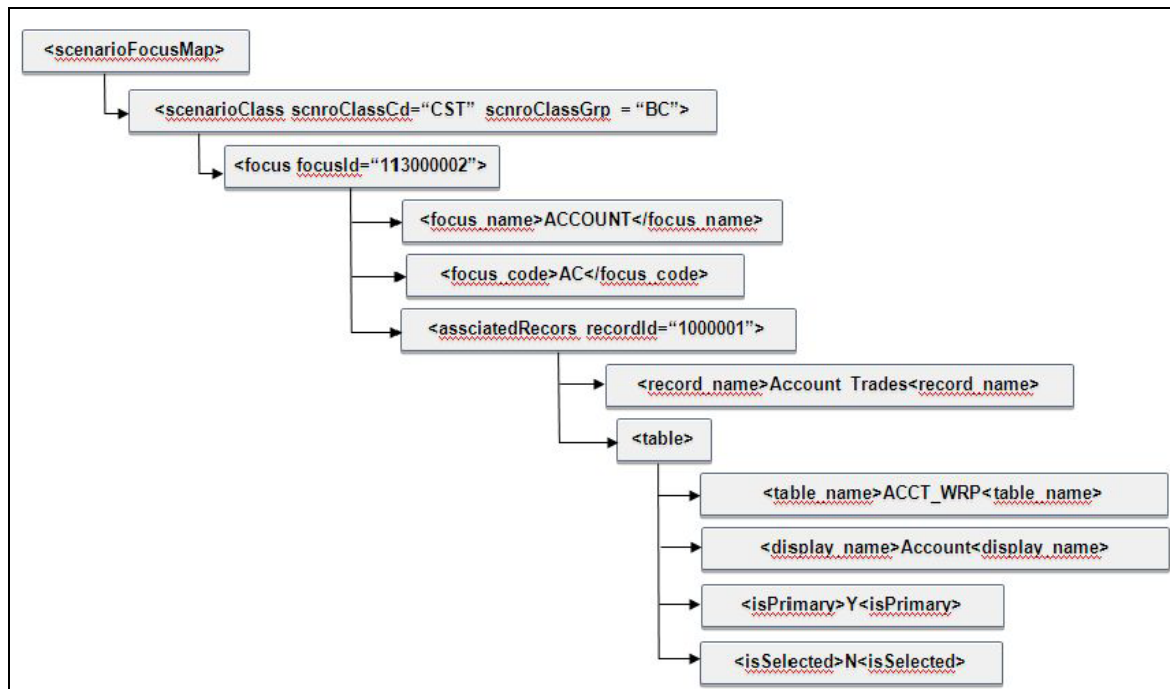


Figure 2: Scenario Focus Mapping

### 4.1 Tags

The following sections describe the tags in the ScenarioFocusMapping.xml file:

#### 4.1.1 <scenarioFocusMap>

This is the root tag for the ScenarioFocusMapping.xml file.

**Attributes** - none

**Child Tags** - <scenarioClass>

**Occurrences - 1****4.1.2 <scenarioClass>**

This tag contains scenario class information and can appear multiple times in the .xml file. Each entry corresponds to a distinct scenario class. The number of times this tag appears in the XML file decides the number of scenario classes available in the Scenario Wizard.

The following table describes the available scenario classes which can be configured for the Scenario Wizard.

**Table 3: List of Scenario Classes**

SCNRO_CLASS_NM	SCNRO_CLASS_CD	SCNRO_CLASS_GRP
Trading Compliance	TC	TC
Best Execution	BEX	TC
Money Laundering	ML	ML
Institutional Money Laundering	IML	ML
Fraud	FR	ML
Customer Risk and Suitability	CST	BC
Mutual Fund Trading Abuses	MF	BC
Employee Trading	ET	BC
Investment Advisor	IA	BC
Asset Management	AM	BC
Control Room	CR	CR
Trading and Sales Abuses	TRA	TC

For every scenario class, add a <scenarioClass> tag.

**Example of Scenario Class**

```
# Customer Risk and Suitability
<scenarioClass scnroClassCd="CST" scnroClass-
Grp="BC">
#
# <scenarioClass> is the parent tag for other
related information like focuses for a specific
Scenario
# Class
#
</scenarioClass>
```

**Attributes -**

1. `scnroClassCd` - Every scenario class has a scenario class code and the allowed values are listed in the `KDD_SCNRO_CLASS_CD` table. This attribute contains the scenario class code for a particular scenario class.
2. `scnroClassGrp` - Available scenario classes are categorized under certain scenario class groups. This attribute contains the scenario group for a particular scenario class.

**Child Tags** - `<focus>`

**Occurrences** - 1...N

### 4.1.3 `<focus>`

This is the child tag for the `<scenarioClass>` tag and there can be multiple occurrences of this tag. The number of times this tag appears inside the `<scenarioClass>` tag determines the number of available focuses for a particular scenario class.

Scenario Wizard displays focuses based on the scenario class. For every available focus of a scenario class, add a `<focus>` tag.

```
# Customer Risk and Suitability
<scenarioClass scnroClassCd="CST" scnroClassGrp="BC">

    # Account focus
    <focus focusId="113000002">
        <focus_name>ACCOUNT</focus_name>
        <focus_code>AC</focus_code>
    #
    # <focus> is the parent tag for other related information like associated
    data for a particular
    # Scenario Class and Focus combination
    #
    </focus>

    # Customer focus
    <focus focusId="113000004">
        <focus_name>CUSTOMER</focus_name>
        <focus_code>CU</focus_code>
    #
    # associated data information for CST_CU
    #
    </focus>
</scenarioClass>
```

**Attributes** -

1. `focusId` - Every allowed focus has an ID associated and which is read from the `KDD_CENTRICITY` table.

**Child Tags** - `<focus_name>`, `<focus_code>`, `<associatedRecord>`

**Occurrences** - 1...N

### 4.1.4 `<focus_name>`

This tag contains the display name for a particular focus ID.

**Attributes** - none

**Child Tags** - none

**Occurrences** - 1

#### 4.1.5 <focus\_code>

Every focus has an associated focus code in the `KDD_CENTRICITY` table and the focus code is entered in this tag.

**Attributes** - none

**Child Tags** - none

**Occurrences** - 1

#### 4.1.6 <associatedRecord>

Associated records for particular scenario class and focus combinations are configured using this tag. This can appear multiple times inside the `<focus>` tag.

Scenario Wizard displays Associated Data options based on the scenario class and focus selected. For every available associated data for a specific scenario class and focus, add an `<associatedRecord>` tag.



```

# Customer Risk and Suitability
<scenarioClass scnroClassCd="CST" scnroClassGrp="BC">

  # Account focus
  <focus focusId="113000002">
    <focus_name>ACCOUNT</focus_name>
    <focus_code>AC</focus_code>

    # associated data Account Trades for CST-AC
    <associatedRecord recordId="1000001">
      <record_name>Account Trades</record_name>
      #
      # <associatedRecord> tag is the parent tag for other details
related to associated data,
      # like tables for primary rule dataset and sub rule datasets.
In this case, it lists tables
      # of CST_AC_AccountTrades
      #
    </associatedRecord>

    # associated data Account Positions for CST_AC
    <associatedRecord recordId="1000002">
      <record_name>Account Positions</record_name>
      #
      # Lists of tables for CST_AC_AccountPositions
      #
    </associatedRecord>

  </focus>
</scenarioClass>

```

Every associated data is a collection of database tables that are used in the primary rule dataset and sub-rules datasets.

You cannot unselect primary rule dataset tables from the Scenario Wizard UI. You may select more sub-rule tables for additional building blocks. The Scenario Wizard UI extracts table information from the `<associatedRecord>` tag. The entire primary rule tables and sub-rule tables are specified within this tag.

```

# Customer Risk and Suitability
<scenarioClass scnroClassCd="CST" scnroClassGrp="BC">
  # Account focus
  <focus focusId="113000002">
    <focus_name>ACCOUNT</focus_name>
    <focus_code>AC</focus_code>
    # associated data Account Trades for CST_AC
    <associatedRecord recordId="1000001">
      <record_name>Account Trades</record_name>
      #
      # List of tables for CST_AC_AccountTrades
      # Account Table
      <table>
        <table_name>ACCT_WRP</table_name>
        <display_name>Account</display_name>
        <isPrimary>Y</isPrimary>
        <isSelected>N</isSelected>
      </table>
      # Trade Table
      <table>
        <table_name>TRADE_EXCTN_DTLS_VW_WRP</table_name>
        <display_name>Trade</display_name>
        <isPrimary>Y</isPrimary>
        <isSelected>N</isSelected>
      </table>
      # Account Balance
      <table>
        <table_name>ACCT_BAL_POSN_SMRY_WRP</table_name>
        <display_name>Account Balance</display_name>
        <isPrimary>N</isPrimary>
        <isSelected>N</isSelected>
      </table>
      # Account Balance
      <table>
        <table_name>ACCT_SMRY_MNTH_WRP</table_name>
        <display_name>Account Summary</display_name>
        <isPrimary>N</isPrimary>
        <isSelected>N</isSelected>
      </table>
      # Investment Advisor
      <table>
        <table_name>NVSMT_MGR_WRP</table_name>
        <display_name>Investment Advisor</display_name>
        <isPrimary>N</isPrimary>
        <isSelected>N</isSelected>
      </table>
    </associatedRecord>
  </focus></scenarioClass>

```

**Attributes -**

- `recordId`- It is unique identifier associated with every entry of the `<associatedRecord>` tag. Its value is entered as per user discretion; the only condition is that the value should be unique across all the `<associatedRecord>` tags in the XML.

**Child Tags** - `<record_name>`, `<table>`

**Occurrences** - 1...N

#### 4.1.7 `<record_name>`

This tag contains the display name for the associated data.

**Attributes** - none

**Child Tags** - none

**Occurrences** - 1

#### 4.1.8 `<table>`

This is the child tag for the `<associatedRecord>` tag and it can appear multiple times. Each mention of this tag corresponds to one of the table wrappers available. The number of times this tag is repeated decides the number of tables that are part of the dataset logic.

##### NOTE

There can be multiple datasets per associated record but only one of them is the primary dataset.

**Attributes** - none

**Child Tags** - `<table_name>`, `<display_name>`, `<isPrimary>`, `<isSelected>`

**Occurrences** - 1...N

#### 4.1.9 `<table_name>`

This tag contains the exact name of the table wrapper from the database. You must verify that the name entered is of the table wrappers only. While building the dataset queries, the system replaces the wrapper name with the corresponding `REALIZED_NM` from the `KDD_DATASET` table.

**Attributes** - none

**Child Tags** - none

**Occurrences** - 1

#### 4.1.10 `<display_name>`

This tag contains the display name for the particular table wrapper entered in the `<table_name>` tag.

**Attributes** - none

**Child Tags** - none

**Occurrences** - 1

#### 4.1.11 `<isPrimary>`

This tag is the indicator flag, which indicates whether a table is part of the primary dataset. Eligible values are N or Y. For primary dataset tables, the value of this tag is Y. For tables exposed for the sub-rule dataset, the value of this tag is N.

**Attributes** - none

**Child Tags** - none

**Occurrences** - 1

#### 4.1.12 <isSelected>

This tag is the indicator flag, which indicates whether a sub-rule table is displayed as pre-selected on the Scenario Wizard UI. Eligible values are N or Y. For pre-selected sub-rule tables, the value of this tag is Y.

---

**NOTE**

If the value of the <isPrimary> tag is N, then the <isSelected> tag is used. If the value of the <isPrimary> tag is Y, then the content of this tag is N.

**Attributes** - none

**Child Tags** - none

**Occurrences** - 1

## 5 Threshold (threshold.xml)

This chapter describes the tags used by the `threshold.xml` file.

All the pre-defined thresholds are declared and defined in the `threshold.xml` file. This template XML file contains all the information about a threshold. The mapping of a threshold to a particular combination of scenario class, focus, and associated data is specified in `datasetrulemap.xml` file.

In order to add a new pre-defined threshold to the Scenario Wizard, you must declare and define the new threshold in the `threshold.xml` file.

The following figure illustrates the structure of `Threshold.xml`.

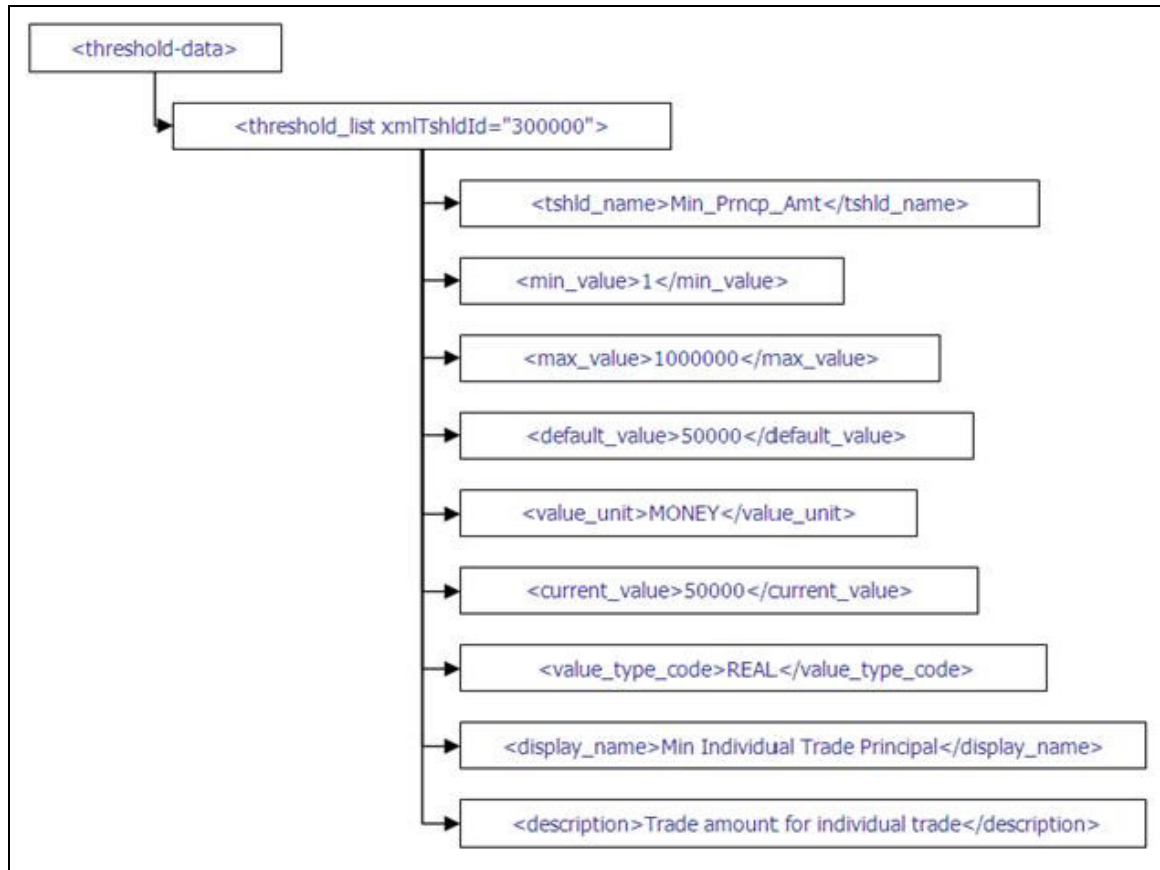


Figure 3: Threshold

### 5.1 Pre-defined Threshold

The Scenario Wizard creates SQL queries for the primary rule dataset and sub-rule dataset internally. These queries contain some pre-defined thresholds. You cannot delete these thresholds from the UI, only their values can be modified.

#### NOTE

The thresholds are defined in the `threshold.xml` file and then referred in the `datasetrulemap.xml` file.

Every threshold is defined independently, and each definition must have a `<threshold_list>` tag.

```

# Incl_Jurisdictions_Lst
<threshold_list xmlTshldId="300000">
#
# <threshold_list> is the parent tag that contains all the information related to
# a threshold.
#
    <tshld_name>Incl_Jurisdictions_Lst</tshld_name>
    <min_value></min_value>
    <max_value></max_value>
    <default_value>'ALL'</default_value>
    <value_unit>NO_UNIT</value_unit>
    <current_value>'ALL'</current_value>
    <value_type_code>LIST</value_type_code>
    <display_name>Included Jurisdictions</display_name>
    <description>The list of jurisdiction codes covered by the scenario.</
description>
</threshold_list>

# Min_Prncp_Amt
<threshold_list xmlTshldId="300004">
    <tshld_name>Min_Prncp_Amt</tshld_name>
    <min_value>1</min_value>
    <max_value>1000000</max_value>
    <default_value>50000</default_value>
    <value_unit>MONEY</value_unit>
    <current_value>50000</current_value>
    <value_type_code>REAL</value_type_code>
    <display_name>Min Individual Trade Principal</display_name>
    <description>The trade amount for each individual trade to be considered of
        interest for generating alert.</description>
</threshold_list>

```

## 5.2 Tags

The following sections describe the tags used by the `threshold.xml` file:

### 5.2.1 <threshold-data>

This is the root tag for the `threshold.xml`.

**Attributes** - none

**Child Tags** - <threshold\_list>

**Occurrences** - 1

### 5.2.2 <threshold\_list>

This tag appears multiple times in the `.xml` file. Each entry corresponds to a distinct threshold definition.

**Attributes** -

- `xmlTshldId` - It is unique identifier associated with every entry of the tag `<threshold_list>`. Its value is entered as per user discretion; the only condition is that the value should be unique across all the `<threshold_list>` tags in the XML.

**Child Tags** - `<tshld_name>`, `<min_value>`, `<max_value>`, `<default_value>`, `<default_value>`, `<value_unit>`, `<current_value>`, `<value_type_code>`, `<display_name>`, `<description>`

**Occurrences** - 1...N

### 5.2.3 `<tshld_name>`

This is the child tag for the `<threshold_list>` tag and it contains the threshold name.

#### NOTE

Business requires that the threshold name should not contain any spaces.

**Attributes** - none

**Child Tags** - none

**Occurrences** - 1

### 5.2.4 `<min_value>`

For numeric thresholds, this tag contains the minimum value for the threshold. For non-numeric thresholds, this tag should be left empty.

**Attributes** - none

**Child Tags** - none

**Occurrences** - 1

### 5.2.5 `<max_value>`

For numeric thresholds, this tag contains the maximum value for the threshold. For non-numeric thresholds this tag should be left empty.

**Attributes** - none

**Child Tags** - none

**Occurrences** - 1

### 5.2.6 `<default_value>`

This tag contains the default value for the threshold.

**Attributes** - none

**Child Tags** - none

**Occurrences** - 1

### 5.2.7 `<value_type_code>`

This tag contains the format of the defined threshold. Currently the allowed values for the type code are:

- INTEGER
- REAL
- STRING
- LIST
- BOOLEAN

**Attributes** - none

**Child Tags** - none

**Occurrences** - 1

### 5.2.8 <value\_unit>

This tag contains the unit of the defined threshold. Currently the allowed values are:

- SECONDS
- MINUTES
- HOURS
- DAYS
- MONEY
- MONEY NO FRAC (Number value without decimals)
- PERCENTAGE

**Attributes** - none

**Child Tags** - none

**Occurrences** - 1

### 5.2.9 <current\_value>

This tag contains the current value for the threshold.

**Attributes** - none

**Child Tags** - none

**Occurrences** - 1

### 5.2.10 <display\_name>

This tag contains the display name for the threshold.

**Attributes** - none

**Child Tags** - none

**Occurrences** - 1

### 5.2.11 <description>



This tag contains the description/purpose of the threshold.

**Attributes** - none

**Child Tags** - none

**Occurrences** - 1

## 6 TA Column Map (TAColumnMap.xml)

This chapter describes the tags used by the `TAColumnMap.xml` file for the Scenario Tuning Utility.

Scenario Tuning Utility leverages the decisions made by analysts on past alerts to help tune the system going forward. The past alerts are analyzed, and by some mechanism are categorized to identify the quality of the alert.

Use of Scenario Tuning helps identifying the correlations between alert attributes and alert quality. The results are represented as graph. The `TAColumnMap.xml` defines the highlights which are mentioned in `DataSetRuleMap.xml` in the name of `<axisFlag>` tag. These column highlights can be used by the Scenario Tuning Utility.

The Scenario Wizard allows you to create user-defined highlights. The system provides a list of eligible highlight names and a `<Create New>` option in the Add Highlight screen for user-defined highlight. The eligible highlight names are configured in the `TAColumnMap.xml` file.

### NOTE

Business requires that for every user-defined highlight, the highlight name should correspond to one of the eligible column names from the TA data table for that particular scenario group.

These eligible highlight names are the eligible column names from the corresponding TA Data table.

The system also allows you to create a new highlight name. To do this, follow the CR process to add the new highlight name as a column to the corresponding TA Data table.

The following table describes the mapping between scenario class group and the TA Data table.

**Table 4: Scenario class group and the TA Data**

SCNRO_CLASS_GRP	TA Data Table
TC	KDD_TA_TC_DATA
ML	KDD_TA_ML_DATA
BC	KDD_TA_BC_DATA
CR	Currently not available

The following figure illustrates the structure of TA Column Map:

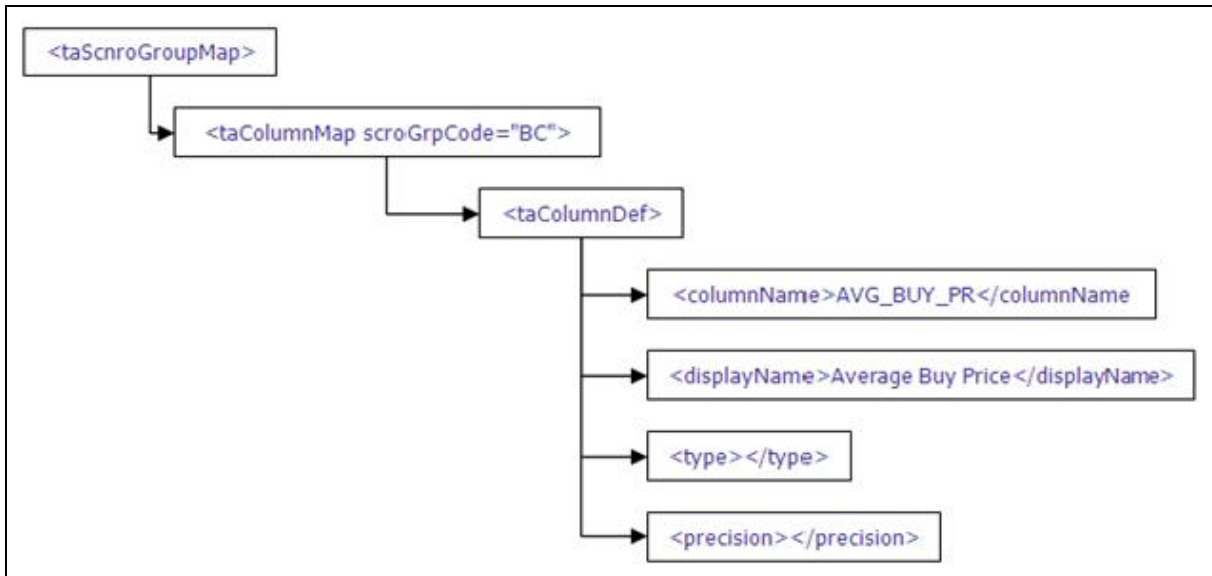


Figure 4: TA Column Map

## 6.1 User-defined Highlight

The Scenario Wizard allows users to add user-defined highlights to a scenario. The system provides a list of eligible highlight names to select from. This list of names is based on the scenario group of the selected scenario class.

### NOTE

Currently, every highlight name in this .XML file corresponds to one of the columns in the TAData table for that scenario group. But there are no constraints while saving a user-defined highlight that validates if the highlight name is one of the columns in the corresponding TA Data table.

Every available scenario group in Scenario Wizard must have a `<taColumnMap>` tag.

```

# BC scenario group
<taColumnMap scroGrpCode="BC">
#
# <taColumnMap> is the parent tag that lists all the eligible highlight names.
#
</taColumnMap>

# BC scenario group
<taColumnMap scroGrpCode="BC">
  # AVG_BUY_PR
  <taColumnDef>
    <columnName>AVG_BUY_PR</columnName>
    <displayName>Average Buy Price</displayName>
    <type></type>
    <precision></precision>
  </taColumnDef>
  # AVG_SELL_PR
  <taColumnDef>
    <columnName>AVG_SELL_PR</columnName>
    <displayName>Average Sell Price</displayName>
    <type></type>
    <precision></precision>
  </taColumnDef>
  # NET_GAIN_LOSS
  <taColumnDef>
    <columnName>NET_GAIN_LOSS</columnName>
    <displayName>Net Gain/Loss</displayName>
    <type></type>
    <precision></precision>
  </taColumnDef>
</taColumnMap>

```

## 6.2 Tags

The following sections describe the tags used by the Scenario Wizard.

### 6.2.1 <taScnroGroupMap>

This is the root tag for the TAColumnMap.xml file.

**Attributes** - none

**Child Tags** - <taColumnMap>

**Occurrences** - 1

### 6.2.2 <taColumnMap>

This tag appears multiple times in the .xml. Each entry corresponds to a distinct scenario class group. This is a parent tag and it contains eligible highlight names for a particular scenario group.

**Attributes** -

- `scroGrpCode` - This attribute contains the scenario group for a particular scenario class.

**Child Tags** - `<taColumnDef>`

**Occurrences** - 1...N

### 6.2.3 `<taColumnDef>`

This is the child tag for the `<taColumnMap>` tag. It contains the information for the highlight name. This tag can appear multiple times and each entry corresponds to a highlight name option for user-defined highlight.

**Attributes** - none

**Child Tags** - `<columnName>`, `<displayName>`, `<type>`, `<precision>`

**Occurrences** - 1...N

### 6.2.4 `<columnName>`

This tag contains one of the eligible column names from the corresponding TA data table.

**Attributes** - none

**Child Tags** - none

**Occurrences** - 1

### 6.2.5 `<displayName>`

This tag contains the display name for the column name.

**Attributes** - none

**Child Tags** - none

**Occurrences** - 1

### 6.2.6 `<type>`

Reserved for future implementations.

### 6.2.7 `<precision>`

Reserved for future implementations.

---

## 7 Data Set Rule Map (datasetrulemap.xml)


This chapter focuses on Data Set Rule mapping. It explains about the different configurations using `datasetrulemap.xml` file.

The `datasetrulemap.xml` file constitutes the backbone of the Scenario Wizard. It contains the actual logic (that is, the SQL queries) for any scenario. The primary rule and the sub-rule datasets are defined in this XML file. The Scenario Wizard provides flexibility to modify the out-of-the-box dataset definition or add new datasets as your business requires.

For a particular scenario class, focus, and associated data combination, this XML file allows the following configurations:

- Primary rule and sub-rule datasets
- Pre-defined highlights
- Pre-defined thresholds
- Test data columns that are not highlights.

The following figure illustrates the structure of `datasetrule map xml`:

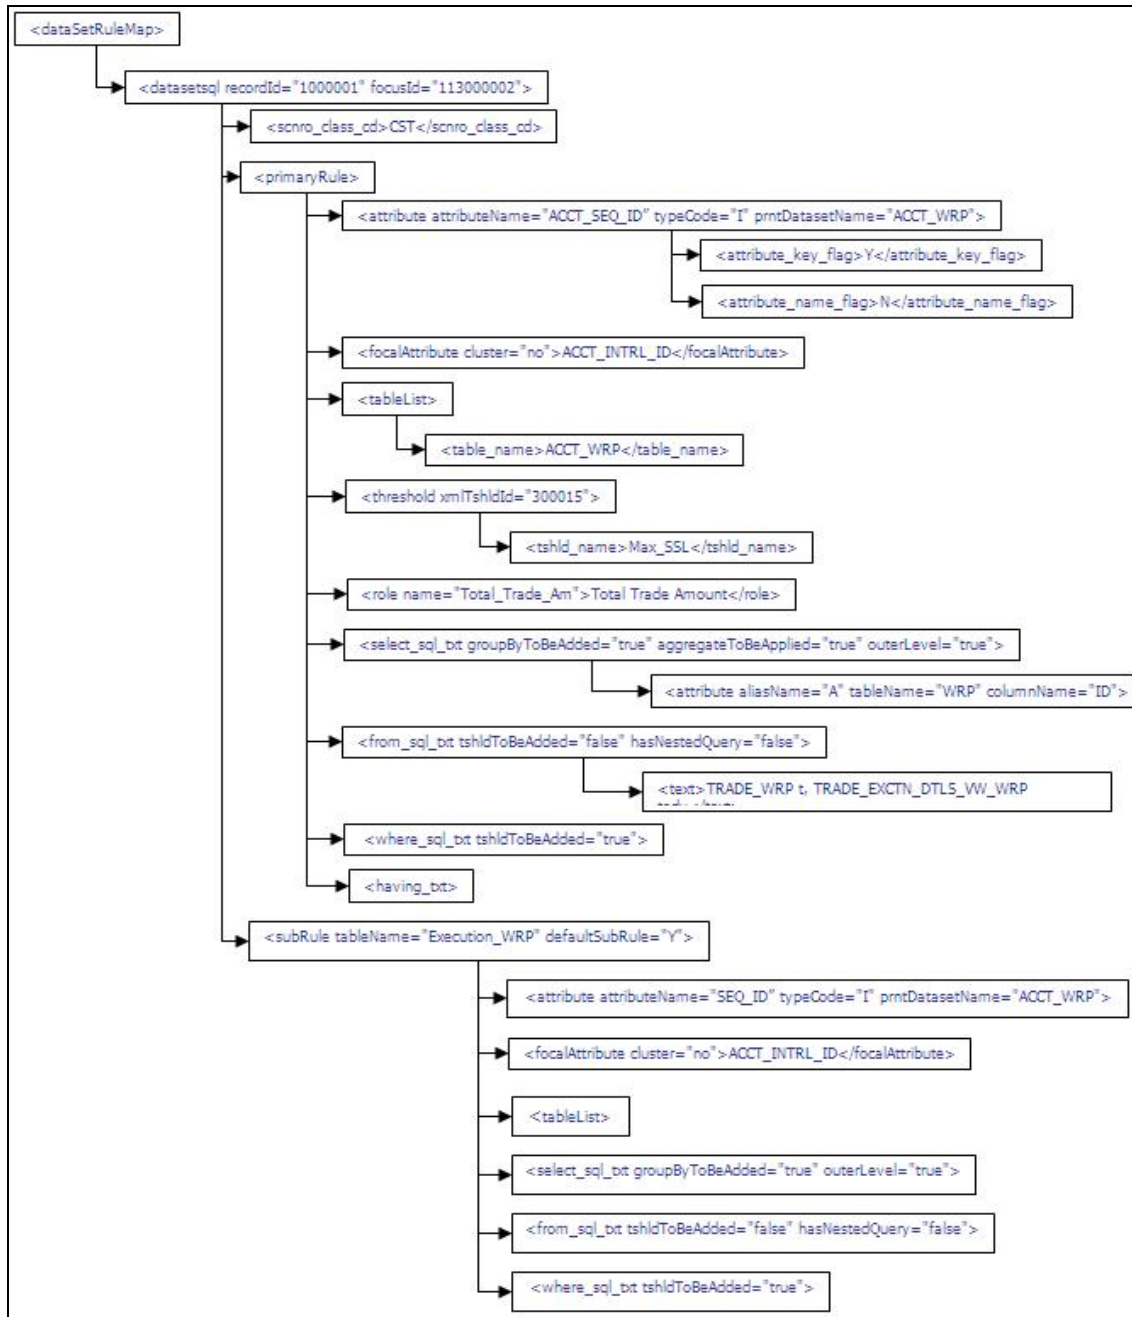

**Figure 5: Data Set Rule Map**

The datasetrulemap.xml file contains the core business logic and related information. The information is categorized based on a specific combination of scenario class, focus, and associated data. Every unique combination is depicted with a <datasetsql> tag and one of the child tags (<scnro\_class\_cd>).

**NOTE**

Pre-defined thresholds, pre-defined highlights, and Default columns for test scenario results belong to a primary rule dataset, and are defined as child tags to the `<primaryRule>` tag. This tag also contains the actual SQL query to be executed.

```
# CST_AC_AccountTrades
#
# 1 - focusId contains the CNTRY_ID of account focus from KDD_CENTRICITY table.
# 2 - recordId maps to one of the declared <associatedRecord> in ScenarioFocus-
Mapping.xml
# 3 - Child tag <scnro_class_cd> specifies the SCNRO_CLASS_CD for Customer Risk
and Suitability
#     from KDD_SCNRO_CLASS table
#
<datasetsql recordId="1000001" focusId="113000002">
  <scnro_class_cd>CST</scnro_class_cd>
  #
  # <datasetsql> tag is the parent tag for primary rule dataset
  and sub rule datasets.
  #
</datasetsql>
```

## 7.1 Primary Rule Dataset

Currently, there can be only one primary rule dataset for a scenario. The primary rule dataset is specified using the `<primaryRule>` tag.

The Primary Rule Dataset contains the alert generation logic for particular scenario. Primary Rule Dataset name is displayed as `<Associated Data>` in the scenario wizard. The Sub Rule Dataset contains the logic for showing matched record for a particular alert. It is actually building block information for a particular alert.



```
#
# CST_AC_AccountTrades
#
<datasetsql recordId="1000001" focusId="113000002">
  <scnro_class_cd>CST</scnro_class_cd>

  <primaryRule>
    #name
    <primary_rule_name>CST_AC_AccountTrades_PR</primary_rule_name>

    #description
    <primary_rule_desc>CST_AC_AccountTrades_PR</primary_rule_desc>

    #
    # <primaryRule> tag is the parent tag for all the related entities and the
    actual SQL query.
    #
    </primaryRule>

  </datasetsql>
```

## 7.2 Dataset Attributes for Primary Rule Dataset

For every dataset attribute, you must specify an `<attribute>` tag.

```

#
# CST_AC_AccountTrades
#
<datasetsql recordId="1000001" focusId="113000002">
  <scnro_class_cd>CST</scnro_class_cd>
  <primaryRule>
    <primary_rule_name>CST_AC_AccountTrades_PR</primary_rule_name>
    <primary_rule_desc>CST_AC_AccountTrades_PR</primary_rule_desc>
    # ACCT_SEQ_ID dataset attribute
    <attribute attributeName="ACCT_SEQ_ID" attributePrntId="" attribu-
teId=""
      typeCode="I" orderFlag="n" discreteFlag="n"
      prntDatasetName="ACCT_WRP">
        # attribute information
        <attribute_key_flag>Y</attribute_key_flag>
        <attribute_name_flag>N</attribute_name_flag>
      </attribute>
    # ACCT_INTRL_ID dataset attribute
    <attribute attributeName="ACCT_INTRL_ID" attributePrntId="" attribu-
teId=""
      typeCode="S" orderFlag="n" discreteFlag="n">
        # attribute information
        <attribute_key_flag>N</attribute_key_flag>
        <attribute_name_flag>N</attribute_name_flag>
      </attribute>
    # SSL_NB dataset attribute
    <attribute attributeName="SSL_NB" attributePrntId="" attributeId=""
      typeCode="I" orderFlag="n" discreteFlag="n">
        # attribute information
        <attribute_key_flag>N</attribute_key_flag>
        <attribute_name_flag>N</attribute_name_flag>
      </attribute>
  #
  # <primaryRule> tag contains more entities and the actual SQL query.
  #
  </primaryRule>
</datasetsql>

```

## 7.3 Pre-defined Highlight

Pre-defined highlights can be configured based on the SQL queries for the primary rule dataset. For every highlight, one `<role>` tag should be specified.

```

#
# CST_AC_AccountTrades
#
<datasetsql recordId="1000001" focusId="113000002">
  <scnro_class_cd>CST</scnro_class_cd>

  <primaryRule>
    <primary_rule_name>CST_AC_AccountTrades_PR</primary_rule_name>
    <primary_rule_desc>CST_AC_AccountTrades_PR</primary_rule_desc>

    # ACCT_SEQ_ID dataset attribute
    <attribute attributeName="ACCT_SEQ_ID" attributePrntId="" attribu-
teId=""
      typeCode="I" orderFlag="n" discreteFlag="n"
      prntDatasetName="ACCT_WRP">

    # ACCT_INTRL_ID dataset attribute
    <attribute attributeName="ACCT_INTRL_ID" attributePrntId="" attribu-
teId=""
      typeCode="S" orderFlag="n" discreteFlag="n">

    # SSL_NB dataset attribute
    <attribute attributeName="SSL_NB" attributePrntId="" attributeId=""
      typeCode="I" orderFlag="n" discreteFlag="n">

    # Eligible pre-defined highlight Total_Trade_Am
    <role name="Total_Trade_Am" highlight="N" format="REAL5" axisFlag="Y"
      roundDigitCount="2" roleTableUsed="TRADE_EXCTN_DTLS_VW_WRP"
      roleColumnUsed="last_trade_prnpl_issng_am" taFieldName =
"TOT_TRD_AM">

      # display name
      Total Trade Amount
    </role>

    # Eligible pre-defined highlight Tot_Trade_Ct
    <role name="Tot_Trade_Ct" highlight="N" format="INTEGER" axisFlag="Y"
      roundDigitCount="2" roleTableUsed="TRADE_EXCTN_DTLS_VW_WRP"
      roleColumnUsed="trade_intrl_id" taFieldName = "TOT_TRD_CT">

      # display name
      Total Trade Ct
    </role>

    #
    # <primaryRule> tag contains more entities and the actual SQL query.
    #
  </primaryRule>

</datasetsql>

```

## 7.4 Pre-defined Threshold

Every threshold that is part of the dataset queries of a scenario must be declared in the `<primaryRule>` tag before it can be used in the query.

In order to include any threshold (that is already defined in the `threshold.xml` file) as a part of any of the dataset queries (primary rule as well as sub-rule), add a `<threshold>` tag inside the `<primaryRule>` tag.

```
#
# CST_AC_AccountTrades
#
<datasetsql recordId="1000001" focusId="113000002">
  <scnro_class_cd>CST</scnro_class_cd>

  <primaryRule>
    <primary_rule_name>CST_AC_AccountTrades_PR</primary_rule_name>
    <primary_rule_desc>CST_AC_AccountTrades_PR</primary_rule_desc>

    # ACCT_SEQ_ID dataset attribute
    <attribute attributeName="ACCT_SEQ_ID" attributePrntId="" attribu-
teId=""
              typeCode="I" orderFlag="n" discreteFlag="n"
              prntDatasetName="ACCT_WRP">

    # ACCT_INTRL_ID dataset attribute
    <attribute attributeName="ACCT_INTRL_ID" attributePrntId="" attribu-
teId=""
              typeCode="S" orderFlag="n" discreteFlag="n">
```

```
# eligible pre-defined highlight Total_Trade_Am
<role name="Total_Trade_Am" highlight="N" format="REAL5" axisFlag="Y"
    roundDigitCount="2" roleTableUsed="TRADE_EXCTN_DTLS_VW_WRP"
    roleColumnUsed="last_trade_prnpl_issng_am" taFieldName =
"TOT_TRD_AM">

# pre-defined threshold Incl_Jurisdictions_Lst
<threshold xmlTshldId="300000">
    <tshld_name>Incl_Jurisdictions_Lst</tshld_name>
</threshold>

# pre-defined threshold Min_Prncp_Amt
<threshold xmlTshldId="300004">
    <tshld_name>Min_Prncp_Amt</tshld_name>
</threshold>

# pre-defined threshold Min_Price
<threshold xmlTshldId="300005">
    <tshld_name>Min_Price</tshld_name>
</threshold>

#
# <primaryRule> tag contains more entities and the actual SQL query.
#

</primaryRule>
</datasetsql>
```

## 7.5 Primary Rule Dataset Query

The select query for the primary rule dataset is configured in the xml file using the following tags:

- <select\_sql\_txt>
- <from\_sql\_txt>
- <where\_sql\_txt>
- <group\_by\_txt>
- <having\_txt>

The example of primary rule dataset is shown below.:

```

#
# CST_AC_AccountTrades
#
<datasetsql recordId="1000001" focusId="113000002">
  <scnro_class_cd>CST</scnro_class_cd>
  <primaryRule>
    <primary_rule_name>CST_AC_AccountTrades_PR</primary_rule_name>
    <primary_rule_desc>CST_AC_AccountTrades_PR</primary_rule_desc>
    # ACCT_SEQ_ID dataset attribute
    <attribute attributeName="ACCT_SEQ_ID" attributePrntId="" attribu-
teId=""
      typeCode="I" orderFlag="n" discreteFlag="n"
      prntDatasetName="ACCT_WRP">
    # ACCT_INTRL_ID dataset attribute
    <attribute attributeName="ACCT_INTRL_ID" attributePrntId="" attribu-
teId=""
      typeCode="S" orderFlag="n" discreteFlag="n">
  # SSL_NB dataset attribute
    <attribute attributeName="SSL_NB" attributePrntId="" attributeId=""
      typeCode="I" orderFlag="n" discreteFlag="n">
    # eligible pre-defined highlight Total_Trade_Am
    <role name="Total_Trade_Am" highlight="N" format="REAL5" axisFlag="Y"
      roundDigitCount="2" roleTableUsed="TRADE_EXCTN_DTLS_VW_WRP"
      roleColumnUsed="last_trade_prnpl_issng_am" taFieldName =
"TOT_TRD_AM">
    # eligible pre-defined highlight Tot_Trade_Ct
    <role name="Tot_Trade_Ct" highlight="N" format="INTEGER" axisFlag="Y"
      roundDigitCount="2" roleTableUsed="TRADE_EXCTN_DTLS_VW_WRP"
      roleColumnUsed="trade_intrl_id" taFieldName = "TOT_TRD_CT">

    # pre-defined threshold Incl_Jurisdictions_Lst
    <threshold xmlTshldId="300000">

    # pre-defined threshold Min_Prncp_Amt
    <threshold xmlTshldId="300004">

    # pre-defined threshold Min_Price
    <threshold xmlTshldId="300005">

#
# primary rule dataset query
#

# primary rule name
<primary_rule_name>CST_AC_AccountTrades_PR</primary_rule_name>

```

```
#focal attribute
<focalAttribute cluster="no">ACCT_INTRL_ID</focalAttribute>

#List of tables which are part of the primary rule dataset query
<tableList>
  <tableName>ACCT_WRP</tableName>
  <tableName>TRADE_EXCTN_DTLS_VW_WRP</tableName>
  <tableName>KDD_CAL_WRP</tableName>
</tableList>

#select clause
<select_sql_txt groupByToBeAdded="true" aggregateToBeApplied="true" outer-
Level="false">

  #select clause attributes
  <attribute isAggregate="true" aliasName="ACCT_SEQ_ID" functionName = "max"
    tableName="ACCT_WRP" columnName="acct_seq_id">
    t1.acct_seq_id
  </attribute>

  <attribute isAggregate="true" aliasName="SSL_NB" functionName = "max"
    tableName="ACCT_WRP" columnName="stblty_survl_level_nb">
    t1.stblty_survl_level_nb
  </attribute>

  <attribute isAggregate="false" aliasName="ACCT_INTRL_ID" table-
Name="ACCT_WRP"
    columnName="acct_intrl_id">
    t1.acct_intrl_id
  </attribute>

  #alias name
  <alias_name>t1</alias_name>

</select_sql_txt>
```

```
#from clause that has a nested query
<from_sql_txt tshldToBeAdded="false" hasNestedQuery="true">

    #select clause of the nested query
    <select_sql_txt>

        <attribute isAggregate="false" tableName="ACCT_WRP"
            columnName="acct_seq_id">ac.acct_seq_id</attribute>

        <attribute isAggregate="false" tableName="ACCT_WRP"
            columnName="acct_intrl_id">ac.acct_intrl_id</attribute>

        <attribute isAggregate="false" tableName="TRADE_EXCTN_DTLS_VW_WRP"
            columnName="trade_intrl_id">tedv.trade_intrl_id</attribute>
    </select_sql_txt>

    #from clause of the nested query; this from clause contains tables, no nested
    query
    <from_sql_txt tshldToBeAdded="true" hasNestedQuery="false">

        #<text> tag contains the table names
        <text>ACCT_WRP ac, TRADE_EXCTN_DTLS_VW_WRP tedv</text>

    </from_sql_txt>
```



```

#where clause of the nested query
  <where_sql_txt tshldToBeAdded="true">
    <![CDATA[ac.acct_intrl_id = tedv.LAST_CUST_ACCT_INTRL_ID
      --Filtering on Included Jurisdictions threshold
      AND (('ALL' IN (@Incl_Jurisdictions_Lst)) or
      (ac.JRSDCN_CD in (@Incl_Jurisdictions_Lst)))
      --Filtering on Min Individual Trade Principal threshold
      AND tedv.last_trade_prnpl_issng_am > @Min_Prncp_Amt
      --Filtering on Min Price threshold
      AND tedv.last_trade_issng_pr >= @Min_Price]]>
  </where_sql_txt>

  <group_by_txt></group_by_txt>
  <having_txt></having_txt>
</from_sql_txt>

#where clause for the main query
<where_sql_txt tshldToBeAdded="false"></where_sql_txt>

#having clause for the main query
<having_txt>
  <![CDATA[MAX(t1.LAST_DATA_DUMP_DT) > (select add_days(b.CLNDR_DT, -
    @Frequency_Period) from KDD_CAL_WRP b where b.CLNDR_NM = 'SYSCAL'
    and b.CLNDR_DAY_AGE = 0 )]]>
</having_txt>

</primaryRule>

</datasetsql>

```

## 7.6 Tags

### 7.6.1 <dataSetRuleMap>

This tag is the root tag for the datasetrulemap.xml file.

**Attributes** - none

**Child Tags** - <datasetsql>

**Occurrences** - 1

### 7.6.2 <datasetsql>

This tag contains all the datasets. It can appear multiple times in the .xml file. Each entry corresponds to a unique combination of scenario class, focus, and associated data.

**Attributes -**

- `recordId` - The unique identifier for a particular associated data.
- `focusId` - The focus ID.

**Child Tags** - `<scnro_class_cd>`, `<primaryRule>`, `<subRule>`

**Occurrences** - 1...N

### 7.6.3 `<scnro_class_cd>`

This tag is the child tag for `<datasetssql>` and contains the scenario class code.

**Attributes** - none

**Child Tags** - none

**Occurrences** - 1

### 7.6.4 `<attribute>`

This tag defines a dataset attribute which can be used in the select clause of primary rule or sub rule dataset query. This tag can appear multiple times for defining all the dataset attributes.

**Attributes -**

- `attributeName` - This specifies the name of the attribute.
- `attributePrntId` - This is a reserved attribute for future implementation.
- `attributeId` - This is a reserved attribute for future implementation.
- `typeCode` - In this attribute, user provides the format type of the attribute.
- `orderFlag` - This attribute corresponds to the ORDER\_FL column of the KDD\_ATTR table. Its value can either be N or Y.
- `discreteFlag` - This attribute corresponds to the DISCRETE\_FL column of the KDD\_ATTR table. Its value can either be N or Y.
- `prntDatasetName` - This attribute specifies name of the parent dataset for the attribute.

**NOTE**

If `<attribute_key_flag>` tag is Y, then only user should specify some value for this attribute, otherwise it should be empty.

**Child Tags** - none

**Occurrences** - 1...N

### 7.6.5 `<attribute_key_flag>`

This tag corresponds to the KEY\_FL column of the KDD\_DATASET\_ATTR table. Allowed values for this tag are Y and N.

**Attributes** - none

**Child Tags** - none

**Occurrences** - 1

### 7.6.6 <attribute\_name\_flag>

This tag corresponds to the `NAME_FL` column of the `KDD_DATASET_ATTR` table. Allowed values for this tag are Y and N.

**Attributes** - none

**Child Tags** - none

**Occurrences** - 1

### 7.6.7 <focalAttribute>

This tag contains the focal attribute to be used with the dataset query. The algorithm uses this attribute while executing the scenario. For Example Account ID, Customer ID, Order ID, Execution ID has to be used by the dataset query when selecting and aggregating data from tables that are part of the dataset.

#### NOTE

This tag is mandatory for both primary rule and sub-rule datasets. For a specific scenario, all datasets should have the same value for the focal attribute. The focal attribute should correspond to one of the attributes defined for the dataset using the `<attribute>` tag.

**Attributes** -

- cluster - Currently, the only allowed value for this attribute is *no*.

**Child Tags** - none

**Occurrences** - 1

### 7.6.8 <tableList>

This tag lists all the tables that are used in a dataset query.

**Attributes** - none

**Child Tags** - `<tableName>`

**Occurrences** - 1

### 7.6.9 <tableName>

This is the child tag for the `<tableList>` tag and contains the table name. It can appear multiple times and the number of times it appears equals the number of tables used in the dataset query.

**Attributes** - none

**Child Tags** - none

**Occurrences** - 1...N

### 7.6.10 <primaryRule>

This tag contains pre-defined thresholds and highlights for the scenario and meta-data related to the primary rule. It also contains the primary rule dataset query.

**Attributes** - none

- **Child Tags** - <threshold>, <select\_sql\_txt>, <from\_sql\_txt>, <where\_sql\_txt>, <having\_txt>, <attribute>, <prnt\_dataset\_id>, <primary\_rule\_name>, <focalAttribute>, <tableList>, <role>, <primary\_rule\_desc>

**Occurrences** - 1

### 7.6.11 <threshold>

Any scenario can have a set of pre-defined thresholds. The definition of every pre-defined threshold used by Scenario Wizard is present in the `threshold.xml` file.

This tag declares a pre-defined threshold for a particular scenario definition. It can occur multiple times and the number of times it appears equals the number of pre-defined thresholds for that particular scenario.

**Attributes** -

- `xmlTshldId` - It is a unique identifier for a threshold. It maps the included threshold to its definition in the `threshold.xml` file.

**Child Tags** - <tshld\_name>

**Occurrences** - 1..N

### 7.6.12 <tshld\_name>

This is the child tag for the <threshold> tag. The threshold name value comes from the `threshold.xml` file. If this value is not same, then an error occurs while saving the scenario.

**Attributes** - none

**Child Tags** - none

**Occurrences** - 1

### 7.6.13 <primary\_rule\_name>

This tag contains a name for the primary rule dataset.

**Attributes** - none

**Child Tags** - none

**Occurrences** - 1

### 7.6.14 <primary\_rule\_desc>

This tag contains a description for the primary rule dataset.

**Attributes** - none

**Child Tags** - none

**Occurrences** - 1

### 7.6.15 <role>

This tag provides the definition for an eligible pre-defined highlight for the scenario. It can appear multiple times. You can add one or more of these eligible roles as pre-defined highlights for the scenario.

**NOTE**

Every highlight (user-defined as well as pre-defined) in Scenario Wizard is, by default, a TA Role. Whenever a highlight is added, one row is entered in the `KDD_PTRN_ROLE` table and corresponding entry is made in the `KDD_TA_ROLE` table. For this reason, the attribute of the `<role>` tag are mapped to columns of both these tables.

**Attributes -**

- `name` - This contains the highlight name. Business requires that the highlight name should not contain any spaces. This name should correspond to the name of one of the attributes defined for the dataset using the `<attribute>` tag.
- `highlight` - This attribute indicates whether this role is a highlight or not. The only allowed value is N.
- `format` - This configures the default format for the highlight, such as REAL5, STRING, and so on. You can change the default format in the Add/Edit Highlight pop-up.
- `axisFlag` - Indicates whether the corresponding TA Role can be used on X/Y axis (of threshold analyzer). Allowed values are Y and N.
- `roundDigitCount` - This sets the precision for the data.
- `roleTableUsed` - This indicates the table name of the highlight attribute.
- `roleColumnUsed` - This contains the column name.
- `taFieldName` - This attribute has the name of the column from the corresponding TA Data table to which this highlight maps.

**Child Tags** - none

**Occurrences** - 1...N

## 7.6.16 `<defaultTestColName>`

This tag lists the default test result columns for a scenario. There can be zero or more such columns.

**NOTE**

While testing a scenario, results are displayed under the highlights defined. Apart from highlights, you can configure some columns from primary rule dataset tables for which data is always displayed on test screen.

## 7.6.17 **Test Scenario - Default Test Result Columns**

Default test result columns are given as child tag for the `<primaryRule>` tag. For every test result column required, add a `<defaultTestColName>` tag.

```

#
# CST_AC_AccountTrades
#
<datasetsql recordId="1000001" focusId="113000002">
  <scnro_class_cd>CST</scnro_class_cd>

  <primaryRule>
    <primary_rule_name>CST_AC_AccountTrades_PR</primary_rule_name>
    <primary_rule_desc>CST_AC_AccountTrades_PR</primary_rule_desc>

    # ACCT_SEQ_ID dataset attribute
    <attribute attributeName="ACCT_SEQ_ID" attributePrntId="" attribu-
teId=""
      typeCode="I" orderFlag="n" discreteFlag="n"
      prntDatasetName="ACCT_WRP">

    # ACCT_INTRL_ID dataset attribute
    <attribute attributeName="ACCT_INTRL_ID" attributePrntId="" attribu-
teId=""
      typeCode="S" orderFlag="n" discreteFlag="n">

    # SSL_NB dataset attribute
    <attribute attributeName="SSL_NB" attributePrntId="" attributeId=""
      typeCode="I" orderFlag="n" discreteFlag="n">

    # eligible pre-defined highlight Total_Trade_Am
    <role name="Total_Trade_Am" highlight="N" format="REAL5" axisFlag="Y"
      roundDigitCount="2" roleTableUsed="TRADE_EXCTN_DTLS_VW_WRP"
      roleColumnUsed="last_trade_prnpl_issng_am" taFieldName =
"TOT_TRD_AM">

```

```

# eligible pre-defined highlight Tot_Trade_Ct
  <role name="Tot_Trade_Ct" highlight="N" format="INTEGER" axisFlag="Y"
    roundDigitCount="2" roleTableUsed="TRADE_EXCTN_DTLS_VW_WRP"
    roleColumnUsed="trade_intrl_id" taFieldName = "TOT_TRD_CT">

# pre-defined threshold Incl_Jurisdictions_Lst
<threshold xmlTshldId="300000">
# pre-defined threshold Min_Prncp_Amt
<threshold xmlTshldId="300004">
# pre-defined threshold Min_Price
<threshold xmlTshldId="300005">
# primary rule name
<primary_rule_name>CST_AC_AccountTrades_PR</primary_rule_name>
#focal attribute
<focalAttribute cluster="no">ACCT_INTRL_ID</focalAttribute>
#List of tables which are part of the primary rule dataset query
<tableList>
      #select clause
      <select_sql_txt groupByToBeAdded="true" aggregateToBeApplied="true"
        outerLevel="false">
#from clause for the main query
<from_sql_txt tshldToBeAdded="false" hasNestedQuery="true">
#where clause for the main query
<where_sql_txt tshldToBeAdded="false">
  #having clause for the main query
  <having_txt>
#specifying ACCT_SEQ_ID is specified as a default test column name
  <defaultTestColName name="ACCT_SEQ_ID"
    displayName="Account Sequence ID">
  </defaultTestColName>
#specifying ACCT_INTRL_ID is specified as a default test column name
  <defaultTestColName name="ACCT_INTRL_ID"
    displayName="Account Internal ID">
  </defaultTestColName>
</primaryRule>
</datasetsql>

```

**Attributes -**

- name - This attribute has the column name from primary rule dataset tables.
- displayName - This attribute contains the display name for the test column.

**Child Tags - none****Occurrences - 0...N**

## 7.7 Sub-Rule Dataset

For every scenario there can be one or more sub-rule datasets. For every sub-rule dataset, specify a `<subRule>` tag.

**NOTE** Both the `<primaryRule>` and `<subRule>` tags follow the same convention for configuring the queries. A `<subRule>` tag primarily differs from `<primaryRule>` in that it does not contain tags for pre-defined highlight, pre-defined threshold and default test columns.

```
#
# CST_AC_AccountTrades
#
<datasetsql recordId="1000001" focusId="113000002">
  <scnro_class_cd>CST</scnro_class_cd>

  # primary rule query
  <primaryRule>
    # sub rule dataset query
    <subRule tableName="TRADE_WRP" defaultSubRule="Y">
      # name and description
      <sub_rule_name>CST_AC_AccountTrades_Trades_BB_SR</sub_rule_name>
      <sub_rule_desc>CST_AC_AccountTrades_Trades_BB_SR</sub_rule_desc>
      # dataset attributes
      <attribute attributeName="TRADE_SEQ_ID" attributePrntId="" attributeId=""
        typeCode="I" orderFlag="n" discreteFlag="n"
        prntDatasetName="TRADE_WRP">
      <attribute attributeName="ACCT_INTRL_ID" attributePrntId=""
        attributeId=""
        typeCode="S" orderFlag="n" discreteFlag="n">
      # focal attributes
      <focalAttribute cluster="no">ACCT_INTRL_ID</focalAttribute>
      # table list
      <tableList>
    # select, from, where and having clause
    <select_sql_txt groupByToBeAdded="false"
      aggregateToBeApplied="true" outerLevel="true">

    <from_sql_txt tshldToBeAdded="true" hasNestedQuery="false">
      <where_sql_txt tshldToBeAdded="true">
      <having_txt></having_txt>
    </subRule>
  </datasetsql>
```





## 8 Embedding Queries in XML

The below example shows how to edit XML with simple SQL query.

### SQL Query

```

SELECT e.EXCTN_SEQ_ID, e.last_cust_acct_intrl_id
FROM EXECUTION_WRP e, TRADE_EXCTN_DTLS_VW_WRP tedv
WHERE e.exctn_intrl_id = tedv.TRADE_INTRL_ID
      AND (('ALL' IN (@Product_Type_List)) or (tedv.PRDUCT_TYPE_CD in (@Pro-
duct_Type_List)))
      AND (('ALL' IN (@Incl_Prod_Sub_Tys_Lst)) or
(tedv.PRDUCT_SUB_TYPE_CD IN (@Incl_Prod_Sub_Tys_Lst)))
      AND tedv.TRADE_PURP_CD in (@Incl_Trade_Purp_Codes_Lst)
      AND tedv.LAST_TRADE_PRNPL_BASE_AM > @Min_Prncp_Amt
      AND tedv.LAST_TRADE_BASE_PR >= @Min_Price
      AND tedv.LAST_TRADE_BASE_PR <= @Max_Price
      AND tedv.TRDR_BUY_SELL_CD = @trd_dir
      AND tedv.TRADE_DT > ( select add_days(kl.CLNDR_DT, - @Look_Back_Period)
                           from KDD_CAL_WRP kl

where kl.CLNDR_NM = 'SYSCAL'
and kl.CLNDR_DAY_AGE = 0)
AND tedv.TRADE_DT <= ( select kl.CLN-
DR_DT                               from KDD_CAL_WRP kl
where kl.CLNDR_NM = 'SYSCAL'
and kl.CLNDR_DAY_AGE = 0)

```

### XML Equivalent

```

<select_sql_txt groupByToBeAdded="false" aggregateToBeApplied="true"
    outerLevel="true">
  <attribute aliasName="EXCTN_SEQ_ID" tableName="EXECUTION_WRP"
    columnName="EXCTN_SEQ_ID">e.EXCTN_SEQ_ID</attribute>
  <attribute aliasName="ACCT_INTRL_ID" tableName="TRADE_EXCTN_DTLS_VW_WRP"
    columnName="last_cust_acct_intrl_id">e.last_cust_acct_intrl_id</
attribute>
</select_sql_txt>
<from_sql_txt tshldToBeAdded="true" hasNestedQuery="false">
  <text>EXECUTION_WRP e, TRADE_EXCTN_DTLS_VW_WRP tedv</text>
</from_sql_txt>
<where_sql_txt tshldToBeAdded="true">
  <![CDATA[
    e.exctn_intrl_id = tedv.TRADE_INTRL_ID
    AND (('ALL' IN (@Product_Type_List)) or
    (tedv.PRDUCT_TYPE_CD in (@Product_Type_List)))
    AND (('ALL' IN (@Incl_Prod_Sub_Tys_Lst)) or
    (tedv.PRDUCT_SUB_TYPE_CD IN (@Incl_Prod_Sub_Tys_Lst)))
    AND tedv.TRADE_PURP_CD in (@Incl_Trade_Purp_Codes_Lst)
    AND tedv.LAST_TRADE_PRNPL_BASE_AM > @Min_Prncp_Amt
    AND tedv.LAST_TRADE_BASE_PR >= @Min_Price
    AND tedv.LAST_TRADE_BASE_PR <= @Max_Price
    AND tedv.TRDR_BUY_SELL_CD = @trd_dir
    AND tedv.TRADE_DT > (select add_days(kl.CLNDR_DT, - @Look_Back_Period)
from KDD_CAL_WRP kl
where kl.CLNDR_NM = 'SYSCAL'
and kl.CLNDR_DAY_AGE = 0)
AND tedv.TRADE_DT <= (select kl.CLNDR_DT
from KDD_CAL_WRP kl
where kl.CLNDR_NM = 'SYSCAL'
and kl.CLNDR_DAY_AGE = 0)]>
</where_sql_txt>
<having_txt></having_txt>

```

## 9 Using Functions in Query

The below example shows the usage of aggregate functions inside SQL query.

### SQL Query

```

SELECT ac.acct_seq_id ACCT_SEQ_ID ,
       ac.acct_intrl_id ACCT_INTRL_ID ,
       s.scrty_intrl_id Security_ID ,
       s.scrty_shrt_nm Security_Short_Name ,
       sum(ap.unit_qt) Unit_Quantity ,
       max(ac.stblty_survl_level_nb) SSL_NB ,
       s.prod_type_cd Product_Type ,
       max(
           CASE WHEN coalesce(abps.net_wrth_am, 1) > 0
                THEN ((ap.mktval_am / coalesce(abps.net_wrth_am, 1)) * 100)
                ELSE 0 END ) Net_Worth_Percentage
FROM ACCT_WRP ac,
     ACCT_POSN_WRP ap,
     SCRTY_WRP s,
     ACCT_BAL_POSN_SMRY_WRP abps
WHERE s.scrty_intrl_id = ap.scrty_intrl_id
      AND ac.acct_intrl_id = ap.acct_intrl_id
      AND ac.acct_intrl_id = abps.acct_intrl_id
      --Filtering on Included Jurisdictions threshold
      AND (('ALL' IN (@Incl_Jurisdictions_Lst)) or (ac.JRSDCN_CD in (@Incl_Jurisdictions_Lst)))
      --Filtering on Included Mantas Business Account Types
      AND ac.MANTAS_ACCT_BUS_TYPE_CD in (@Mantas_Bus_Acct_Type_Lst)
      -- Filtering on Minimum SSL
      AND coalesce(ac.STBLTY_SURVL_LEVEL_NB, 99) >= @Min_SSL
      -- Filtering on maximum SSL
      AND coalesce(ac.STBLTY_SURVL_LEVEL_NB, 99) <= @Max_SSL
      -- Filtering on Included Product Types threshold
      AND (('ALL' IN (@Product_Type_List)) or (s.prod_type_cd in (@Product_Type_List)))
      -- Filtering on Included Product Subtypes threshold
      AND (('ALL' IN (@Incl_Prod_Sub_Tys_Lst))
           or (s.prod_sub_type_cd IN (@Incl_Prod_Sub_Tys_Lst)))
      -- Filtering on Min Position Unit Quantity
      AND ap.unit_qt >= @Min_posn_Unit_qt
      -- Filtering on Min Position Value
      AND ap.mktval_am >= @Min_Posn_Value
      --Filtering on Min Position as Pct Net Worth
      AND (CASE WHEN coalesce(abps.net_wrth_am, 1) > 0

```

```
THEN((ap.mktval_am / coalesce(abps.net_wrth_am, 1)) * 100
      ELSE 0 END) >= @Min_Posn_As_Net_Wrth_Pctg
      --Filtering on Included Manners Held
      AND (('ALL' IN (@Incl_Manners_Type)) or (ap.acctg_rule_cd in
(@Incl_Manners_Type)))
GROUP BY ac.acct_seq_id ,
         ac.acct_intrl_id ,
         s.scrty_intrl_id ,
         s.scrty_shrt_nm ,
         s.prod_type_cd
```

## XML Equivalent

```

    <select_sql_txt groupByToBeAdded="true" aggregateToBeApplied="true" outer-
Level="true">
      <attribute isAggregate="false" aliasName="ACCT_SEQ_ID" tableName="ACCT_WRP"
        columnName="acct_seq_id">ac.acct_seq_id</attribute>
      <attribute isAggregate="false" aliasName="ACCT_INTRL_ID" table-
Name="ACCT_WRP"
        columnName="acct_intrl_id">ac.acct_intrl_id</attribute>
      <attribute isAggregate="false" aliasName="Security_ID" tableName="SCRTY_WRP"
        columnName="scrty_intrl_id">s.scrty_intrl_id</attribute>
      <attribute isAggregate="false" aliasName="Security_Short_Name" table-
Name="SCRTY_WRP"
        columnName="scrty_shrt_nm">s.scrty_shrt_nm</attribute>
      <attribute isAggregate="true" aliasName="Unit_Quantity" functionName = "sum"
        tableName="ACCT_POSN_WRP" columnName="unit_qt">ap.unit_qt</
attribute>
      <attribute isAggregate="true" aliasName="SSL_NB" functionName = "max"
        tableName="ACCT_WRP" ZolumnName="stblty_survl_level_nb">
        ac.stblty_survl_level_nb</attribute>
      <attribute isAggregate="false" aliasName="Product_Type" table-
Name="SCRTY_WRP"
        columnName="prod_type_cd">s.prod_type_cd</attribute>
      <attribute isAggregate="true" aliasName="Net_Worth_Percentage" function-
Name="max"
        tableName="ACCT_BAL_POSN_SMRY_WRP, ACCT_POSN_WRP"
        columnName="net_wrth_am, mktval_am">
        <![CDATA[CASE WHEN coalesce(abps.net_wrth_am, 1) > 0
          THEN ((ap.mktval_am / coalesce(abps.net_wrth_am,
1)) * 100)
          ELSE 0 END ]]>
      </attribute>
    </select_sql_txt>
    <from_sql_txt tshldToBeAdded="true" hasNestedQuery="false">
      <text>ACCT_WRP ac, ACCT_POSN_WRP ap, SCRTY_WRP s, ACCT_BAL_POSN_SM-
RY_WRP abps
      </text>
    </from_sql_txt>
    <where_sql_txt tshldToBeAdded="true">
      <![CDATA[s.scrty_intrl_id = ap.scrty_intrl_id
        AND ac.acct_intrl_id = ap.acct_intrl_id
        AND ac.acct_intrl_id = abps.acct_intrl_id
        --Filtering on Included Jurisdictions threshold

```

```

        AND (('ALL' IN (@Incl_Jurisdictions_Lst)) or (ac.JRSDCN_CD in
(@Incl_Jurisdictions_Lst)))
        -Filtering on Included Mantas Business Account Types
        AND ac.MANTAS_ACCT_BUS_TYPE_CD in (@Mantas_Bus_Acct_Type_Lst)
        -- Filtering on Minimum SSL
        AND coalesce(ac.STBLTY_SURVL_LEVEL_NB, 99) >= @Min_SSL
        -- Filtering on maximum SSL
        AND coalesce(ac.STBLTY_SURVL_LEVEL_NB, 99) <= @Max_SSL
        -- Filtering on Included Product Types threshold
        AND (('ALL' IN (@Product_Type_List)) or (s.prod_type_cd in (@Pro-
duct_Type_List)))
        -- Filtering on Included Product Subtypes threshold
        AND (('ALL' IN (@Incl_Prod_Sub_Tys_Lst)) or (s.prod_sub_type_cd IN
(@Incl_Prod_Sub_Tys_Lst)))
        -- Filtering on Min Position Unit Quantity
        AND ap.unit_qt >= @Min_posn_Unit_qt
        -- Filtering on Min Position Value
        AND ap.mktval_am >= @Min_Posn_Value
        --Filtering on Min Position as Pct Net Worth
        AND (CASE WHEN coalesce(abps.net_wrth_am, 1) > 0
        THEN((ap.mktval_am / coalesce(abps.net_wrth_am, 1)) * 100) ELSE 0
END) >=@Min_Posn_As_Net_Wrth_Pctg
        --Filtering on Included Manners Held
        AND (('ALL' IN (@Incl_Manners_Type)) or (ap.acctg_rule_cd in
@Incl_Manners_Type)))
    ]]>
</where_sql_txt>
<having_txt></having_txt>

```

## 10 Nested Query

The below example shows the usage of nested query inside the SQL.

### SQL Query

```

SELECT max(t1.acct_seq_id) ACCT_SEQ_ID ,
       sum(t1.last_trade_prnpl_issng_am) Total_Trade_Am ,
       count(t1.trade_intrl_id) Tot_Trade_Ct ,
       max(t1.stblty_survl_level_nb) SSL_NB ,
       t1.acct_intrl_id ACCT_INTRL_ID ,
       MIN(t1.ABS_PRICE_CHG) ABS_PRICE_CHG

FROM (
      SELECT ac.acct_seq_id ,
             ac.acct_intrl_id ,
             tedv.trade_intrl_id ,
             tedv.last_trade_prnpl_issng_am ,
             ac.stblty_survl_level_nb ,
             tedv.LAST_DATA_DUMP_DT ,
             tedv.BUS_DMN_LIST_TX ABS_PRICE_CHG
      FROM ACCT_WRP ac, TRADE_EXCTN_DTLS_VW_WRP tedv
      WHERE ac.acct_intrl_id = tedv.LAST_CUST_ACCT_INTRL_ID
            -- Filtering on Included Business Account Types threshold
            AND ac.MANTAS_ACCT_BUS_TYPE_CD in (@Mantas_Bus_Acct_-
Type_Lst)
            -- Filtering on Included Product Types threshold
            AND (('ALL' IN (@Product_Type_List)
                or (Tedv.PRDUCT_TYPE_CD in (@Product_Type_List)))
            --Filtering on Included Jurisdictions threshold
            AND (('ALL' IN (@Incl_Jurisdictions_List)
                or (ac.JRSDCN_CD in (@Incl_Jurisdictions_List)))
            -- Filtering on Included Product Subtypes threshold
            AND (('ALL' IN (@Incl_Prod_Sub_Tys_List)
                or (tedv.PRDUCT_SUB_TYPE_CD IN
(@Incl_Prod_Sub_Tys_List)))
            --Filtering on Included Trade Purpose Types threshold
            AND tedv.TRADE_PURP_CD in (@Incl_Trade_Purp_Codes_List)
            --Filtering on Min Individual Trade Principal threshold
            AND tedv.last_trade_prnpl_issng_am > @Min_Prncp_Amt
            -- Filtering on Min Price threshold
            AND tedv.last_trade_issng_pr >= @Min_Price
    )

```



```

-- Filtering on Max Price threshold
AND tedv.last_trade_issng_pr <= @Max_Price
-- Filtering on Trade Direction (Buy==1/Sell==2) threshold
AND tedv.TRDR_BUY_SELL_CD = @trd_dir
--Filtering on Lookback period threshold
AND tedv.TRADE_DT > (select add_days(kl.CLNDR_DT, -
@Look_Back_Period)
                                from KDD_CAL_WRP kl
                                where kl.CLNDR_NM =
'SYSCAL'
                                and kl.CLNDR_DAY_AGE = 0)
AND tedv.TRADE_DT <= (select kl.CLNDR_DT
                                from KDD_CAL_WRP kl
                                where kl.CLNDR_NM =
'SYSCAL'
                                and kl.CLNDR_DAY_AGE = 0)
--Filtering on Suitability Level threshold
AND coalesce(ac.STBLTY_SURVL_LEVEL_NB, 99) >= @Min_SSL
AND coalesce(ac.STBLTY_SURVL_LEVEL_NB, 99) <= @Max_SSL
) t1
GROUP BY t1.acct_intrl_id
HAVING MAX(t1.LAST_DATA_DUMP_DT) > (select add_days(b.CLNDR_DT, - @Frequency_Period)
                                from KDD_CAL_WRP b
                                where b.CLNDR_NM =
'SYSCAL'
                                and b.CLNDR_DAY_AGE
= 0 )
AND max(t1.LAST_DATA_DUMP_DT) <= (select KC.CLNDR_DT
                                from KDD_CAL_WRP KC
                                where KC.CLNDR_NM
= 'SYSCAL'
                                and KC.CLNDR_DAY_AGE
= 0)
--Filtering on Min Total Trade Principal thresh-
old
AND sum(t1.last_trade_prnpl_issng_am) > @Min_Tot_Prncp_Amt
--Filtering on Min Trade Ct threshold
AND count(t1.trade_intrl_id) >= @Min_Trd_Ct

```

## XML Equivalent

```

<select_sql_txt groupByToBeAdded="true" aggregateToBeApplied="true" outer-
Level="false">
  <attribute isAggregate="true" aliasName="ACCT_SEQ_ID" functionName = "max"
    tableName="ACCT_WRP" columnName="acct_seq_id">t1.acct_seq_id</
attribute>
  <attribute isAggregate="true" aliasName="Total_Trade_Am" functionName =
"sum"
    tableName="TRADE_EXCTN_DTLS_VW_WRP"
    columnName="last_trade_prnpl_issng_am">t1.last_trade_prn-
pl_issng_am
  </attribute>
  <attribute isAggregate="true" aliasName="Tot_Trade_Ct" functionName =
"count"
    tableName="TRADE_EXCTN_DTLS_VW_WRP"
    columnName="trade_intrl_id">t1.trade_intrl_id
  </attribute>
  <attribute isAggregate="true" aliasName="SSL_NB" functionName = "max"
    tableName="ACCT_WRP" columnName="stblty_survl_level_nb">
t1.stblty_survl_level_nb
  </attribute>
  <attribute isAggregate="false" aliasName="ACCT_INTRL_ID" table-
Name="ACCT_WRP"
    columnName="acct_intrl_id">t1.acct_intrl_id
  </attribute>

  <alias_name>t1</alias_name>
</select_sql_txt>

```

```
<from_sql_txt tshldToBeAdded="false" hasNestedQuery="true">
  <select_sql_txt>
    <attribute isAggregate="false" tableName="ACCT_WRP"
      columnName="acct_seq_id">ac.acct_seq_id
    </attribute>
    <attribute isAggregate="false" tableName="ACCT_WRP"
      columnName="acct_intrl_id">ac.acct_intrl_id
    </attribute>
    <attribute isAggregate="false" tableName="TRADE_EXCTN_DTLS_VW_WRP"
      columnName="trade_intrl_id">tedv.trade_intrl_id
    </attribute>
    <attribute isAggregate="false" tableName="TRADE_EXCTN_DTLS_VW_WRP"
      columnName="last_trade_prn-
pl_issng_am">tedv.last_trade_prnpl_issng_am
    </attribute>
    <attribute isAggregate="false" tableName="ACCT_WRP"
      columnName="stblty_survl_level_nb">ac.stblty_sur-
vl_level_nb
    </attribute>
    <attribute isAggregate="false" tableName="TRADE_EXCTN_DTLS_VW_WRP"
      columnName="LAST_DATA_DUMP_DT">tedv.LAST_DATA_DUMP_DT
    </attribute>
  </select_sql_txt>
</from_sql_txt>
```

```
<from_sql_txt tshldToBeAdded="true" hasNestedQuery="false">
  <text>ACCT_WRP ac, TRADE_EXCTN_DTLS_VW_WRP tedv</text>
</from_sql_txt>

<where_sql_txt tshldToBeAdded="true"><![CDATA[
ac.acct_intrl_id = tedv.LAST_CUST_ACCT_INTRL_ID
-- Filtering on Included Business Account Types threshold
AND ac.MANTAS_ACCT_BUS_TYPE_CD in (@Mantas_Bus_Acct_Type_Lst)
-- Filtering on Included Product Types threshold
AND (('ALL' IN (@Product_Type_List)) or
      (Tedv.PRDUCT_TYPE_CD in (@Product_Type_List)))
--Filtering on Included Jurisdictions threshold
AND (('ALL' IN (@Incl_Jurisdictions_Lst)) or
      (ac.JRSDCN_CD in (@Incl_Jurisdictions_Lst)))
-- Filtering on Included Product Subtypes threshold
AND (('ALL' IN (@Incl_Prod_Sub_Tys_Lst)) or
      (tedv.PRDUCT_SUB_TYPE_CD IN (@Incl_Prod_Sub_Tys_Lst)))
--Filtering on Included Trade Purpose Types threshold
AND tedv.TRADE_PURP_CD in (@Incl_Trade_Purp_Codes_Lst)
--Filtering on Min Individual Trade Principal threshold
AND tedv.last_trade_prnpl_issng_am > @Min_Prncp_Amt
-- Filtering on Min Price threshold
AND tedv.last_trade_issng_pr >= @Min_Price
-- Filtering on Max Price threshold
AND tedv.last_trade_issng_pr <= @Max_Price
-- Filtering on Trade Direction (Buy==1/Sell==2) threshold
AND tedv.TRDR_BUY_SELL_CD = @trd_dir
--Filtering on Lookback period threshold
```

```

        AND tedv.TRADE_DT >
            (select add_days(kl.CLNDR_DT, - @Look_Back_Period)
             from KDD_CAL_WRP kl
             where kl.CLNDR_NM = 'SYSCAL'
                   and kl.CLNDR_DAY_AGE = 0)
        AND tedv.TRADE_DT <=
            (select kl.CLNDR_DT
             from KDD_CAL_WRP kl
             where kl.CLNDR_NM = 'SYSCAL'
                   and kl.CLNDR_DAY_AGE = 0)
        --Filtering on Suitability Level threshold
        AND coalesce(ac.STBLTY_SURVL_LEVEL_NB, 99) >= @Min_SSL
        AND coalesce(ac.STBLTY_SURVL_LEVEL_NB, 99) <= @Max_SSL
    ]]>
    </where_sql_txt>
    <group_by_txt></group_by_txt>
    <having_txt></having_txt>
</from_sql_txt>

<where_sql_txt tshldToBeAdded="false"></where_sql_txt>
<having_txt><![CDATA[
    MAX(t1.LAST_DATA_DUMP_DT) > (select add_days(b.CLNDR_DT, - @Frequency_Period)
                                from KDD_CAL_WRP b
                                where b.CLNDR_NM = 'SYSCAL'
                                       and b.CLNDR_DAY_AGE = 0 )

    AND max(t1.LAST_DATA_DUMP_DT) <= (select KC.CLNDR_DT
                                        from KDD_CAL_WRP KC
                                        where KC.CLNDR_NM
= 'SYSCAL'
= 0)
                                AND KC.CLNDR_DAY_AGE
]]>

```

```

old    --Filtering on Min Total Trade Principal thresh-
        AND sum(t1.last_trade_prnpl_issng_am) > @Min_Tot_Prncp_Amt
        --Filtering on Min Trade Ct threshold
        AND count(t1.trade_intrl_id) >= @Min_Trdr_Ct]]>
</having_txt>

```

