

Oracle Financial Services Compliance Regulatory Reporting

US SAR Administration Guide

Release 8.0.8.0.0

December 2019

F26032-01

ORACLE[®]
Financial Services

OFS CRR US SAR Administration Guide

Copyright © 2021 Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are “commercial computer software” pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

For information on third party licenses, click [here](#).

Document Control

Table 1: Document Control

| Version Number | Revision Date | Change Log |
|----------------|---------------|--|
| 1.1 | June 2020 | Updated Configuring Multiple Instances section. |
| 1.0 | December 2019 | Updated Configuring Webservice in OFSCRR in OFSECM section. |

Contents

| | | |
|----------|--|-----------|
| 1 | About This Guide | 3 |
| 1.1 | Who Should Use This Guide | 3 |
| 1.2 | How This Guide is Organized | 3 |
| 1.3 | Where to Find More Information | 3 |
| 1.4 | Conventions | 4 |
| 2 | Administration Workflow | 1 |
| 3 | Setting Users | 2 |
| 3.1 | Creating Users | 2 |
| 3.2 | Mapping Users To User Groups | 2 |
| 3.3 | Logging in and Resetting Password | 3 |
| 4 | Loading Data into the OFSCRR Application | 4 |
| 4.1 | Loading the Client-Specific Data | 4 |
| 4.1.1 | <i>Uploading Excel</i> | 5 |
| 4.2 | Loading Product Supplied Metadata | 6 |
| 4.3 | Configuring Security Attributes for Users | 6 |
| 5 | Integrating with the ECM Application | 7 |
| 5.1 | Configuring Webservice in OFSCRR | 7 |
| 5.2 | Configuring CRR Service URL in Atomic Schema | 7 |
| 5.3 | Configuring Webservice in OFSECM | 7 |
| 5.3.1 | <i>Updating OFSCRR Webservice password in OFSECM</i> | 8 |
| 5.4 | Configuring Processing Modeling Framework (PMF) | 9 |
| 6 | Configuring Parameters | 10 |
| 6.1 | Report Lock Period | 10 |
| 6.2 | Activity Information | 10 |
| 6.3 | Default Domain 1 | 10 |
| 6.4 | Transferring Primary CUST ACCT Only | 10 |
| 6.5 | Configuring Multiple Instances | 11 |
| 6.5.1 | <i>Configuring Multiple Instance Attribute Flag</i> | 11 |
| 6.5.2 | <i>Configuring PMF</i> | 11 |

| | | |
|----------|--|-----------|
| 6.5.3 | <i>Configuring Report URLs</i> | 11 |
| 6.5.4 | <i>Configuring Case Jurisdiction and Report Type Mapping</i> | 12 |
| 7 | OFSA Support Contact Details | 13 |
| 8 | Send Us Your Comments | 14 |

1 About This Guide

This guide provides instructions to configure the Oracle Financial Services Compliance Regulatory Reporting Report (OFSCRR) application.

This chapter covers the following topics:

- [Who Should Use This Guide](#)
- [How This Guide is Organized](#)
- [Where to Find More Information](#)
- [Conventions](#)

1.1 Who Should Use This Guide

The *OFSCRR Administration Guide* is designed for use by Oracle Financial Services Administration users. The list of responsibilities are as follows:

- Configure, maintain, and adjust the system
- Maintain user accounts and roles, archive data, and load data feeds

1.2 How This Guide is Organized

This guide includes the following chapters:

- [Chapter 2, Administration Workflow](#), explains the administration workflow in the OFSCRR application.
- [Chapter 3, Setting Users](#), details the steps involved in creating users.
- [Chapter 4, Loading Data into the OFSCRR Application](#), details the steps for loading client-specific data and product supplied metadata.
- [Chapter 5, Integrating with the ECM Application](#), details the steps involved in the integration of the OFSCRR application with OFSECM.
- [Chapter 6, Configuring Parameters](#), explains the steps to configure the report lock period, activity information, default domain, and transferring primary customer account.

1.3 Where to Find More Information

For more information on OFSCRR application, refer to the following documents in [OHC](#):

- Oracle Financial Services Compliance Regulatory Reporting Installation Guide
- Oracle Financial Services Compliance Regulatory Reporting Data Model Reference Guide
- Oracle Financial Services Compliance Regulatory Reporting Release Notes/ReadMe
- Oracle Financial Services Compliance Regulatory Reporting User Guide
- Oracle Financial Services Compliance Regulatory Reporting Web Services Guide

To find additional information about how Oracle Financial Services solves real business problems, see our website at www.oracle.com/financialservices.

1.4 Conventions

Table 1: Conventions Used in this Guide

| Conventions | Descriptions |
|-------------|---|
| Italics | <ul style="list-style-type: none"> Names of books, chapters, and sections as references Emphasis |
| Bold | <ul style="list-style-type: none"> An Object of an action (menu names, field names, options, button names) in a step-by-step procedure Commands typed at a prompt User input |
| Monospace | <ul style="list-style-type: none"> Directories and subdirectories File names and extensions Process names Code sample, including keywords and variables within a text and as separate paragraphs, and user-defined program elements within a text |
| Asterisk | Mandatory fields in the User Interface |
| <Variable> | Substitute input value |

2 Administration Workflow

This chapter describes the Administrator workflow in the OFSCRR application.

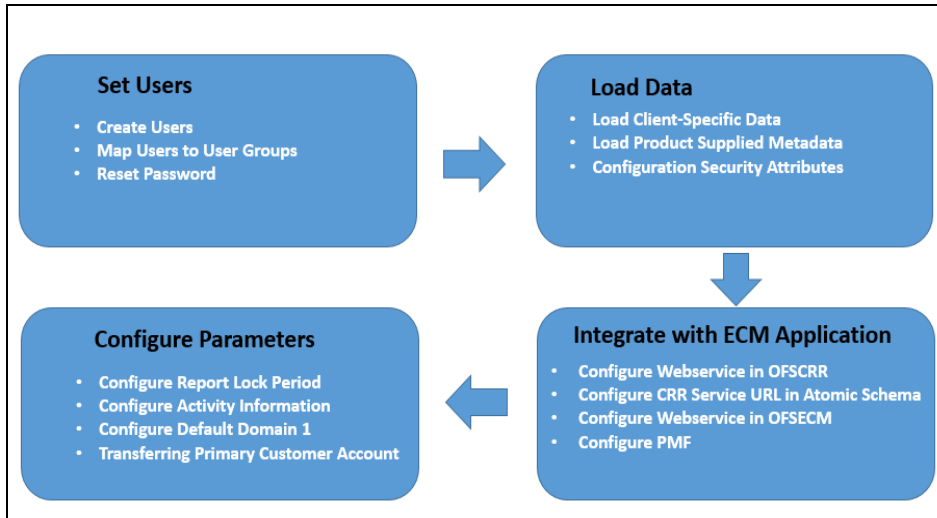


Figure 1: Administrator workflow

Table 2: Administrator workflow

| Workflow | Description |
|--|---|
| Setting Users | Provide access to users in the OFSCRR application through the user groups. |
| Loading Data into the OFSCRR Application | Load-client specific data and product supplied metadata in the OFSCRR application. |
| Integrating with the ECM Application | Integrate the OFSECM application with the OFSCRR application to post cases to generate reports with the Webservice calls. |
| Configuring Parameters | Configure the report lock period, activity information, default domain, and transferring primary customer account. |

3 Setting Users

This chapter describes how to provide access to users in the OFSCRR application through the user groups and includes the following topics:

- [Creating Users](#)
- [Mapping Users To User Groups](#)
- [Logging in and Resetting Password](#)

3.1 Creating Users

To create users, follow these steps:

1. To create the users, see the *Object Administration* section in the [Oracle Financial Services Analytical Applications Infrastructure User Guide](#).

NOTE If you are integrating the OFSCRR application with the OFSECM application, it is optional to create the OFSCRR Administrator user. The user mapped to the role of OFSECM Administrator can be mapped to the role of OFSCRR Administrator.

2. Map the users to the predefined user groups, which in turn map to the user role. For more information, see the *Object Administration* section in the [Oracle Financial Services Analytical Applications Infrastructure User Guide](#).

[Table 3](#) provides information about the predefined user groups that are mapped to the created users.

Table 3: Users and Groups

| Group Code | Group Name | Group Description |
|-----------------|------------------|--------------------------|
| RRUSANALYST | RR US Analyst | RR US Analyst User Group |
| RRUSAUDITOR | RR US Auditor | RR US Auditor User Group |
| RRUSSUPER | RR US Super User | RR US Super User Group |
| RRUSSUPERVISOR | RR US Supervisor | RR US Supervisor Group |
| RRADMINISTRATOR | RRADMINISTRATOR | RR Administrator Group |

3.2 Mapping Users To User Groups

Use [Table 4](#) to map the users to pre-defined user groups.

Table 4: Mapping Users to User Groups

| Group Code | Group Description | Group Name |
|------------|--|------------------|
| Analyst | Reg Report Analyst Role | RR US Analyst |
| Supervisor | Reg Report Supervisor Role | RR US Supervisor |
| Super User | All Roles (Analyst, Supervisor, Admin) RRALL | RR US Super User |
| Auditor | Access to US SARDI Report (RRUSAUDITOR) | RR US Auditor |
| Admin User | RR Admin with Edit | RRADMINISTRATOR |

3.3 Logging in and Resetting Password

To log in and reset password, follow these steps:

1. Log in with each created user in the OFSCRR application. The Password Reset page is displayed.

NOTE This page is displayed when a user logs in for the first time immediately after that user has been created, or every time the SYSADMN user resets the password. For example, when the user forgets the password or when the password is locked.

2. Reset the password. The OFSCRR application login page is displayed.

NOTE You must log in to the application using the new password.

3. The OFSCRR application landing page is displayed. Click **Compliance Regulatory Reporting**.
4. Hover over **US-SAR**. Select Search and List page, Create New Report, or File Reports to open the OFSCRR application.

NOTE Follow these steps whenever a new user is added or modified (for User Details, User Group mapping, Security Attribute mapping, and Password Change).

4 Loading Data into the OFSCRR Application

This chapter includes the following topics:

- [Loading the Client-Specific Data](#)
- [Loading Product Supplied Metadata](#)
- [Configuring Security Attributes for Users](#)

4.1 Loading the Client-Specific Data

This section explains steps to load the client specific data in to the OFSCRR application.

To load the client-specific data, follow these steps:

1. Navigate to `<ftpshare path>/STAGE/Excelupload/Templates`.
2. The `<ftpshare path>` is the same path given in variable `OFSAAI FTP` in `OFSAAI_InstallConfig.xml` while installing OFSAAI. For more information, see *Configuring OFSAAI_InstallConfig.xml File* section in the [Oracle Financial Services Compliance Regulatory Reporting Installation Guide](#).
3. Download the following Excel sheets to the Windows machine from the path given in the step 2.

Table 5: Excel Sheets

| Group Code | Group Name | Group Description |
|-------------------------------------|---|---|
| DIM_DOMAIN1.xlsx | Provide the list of all jurisdictions which are available in OFSECM. | Security Attribute1 Static Information section. |
| DIM_DOMAIN2.xlsx | Provide the list of all business domains which are available in OFSECM. | Security Attribute2 Static Information section. |
| DIM_DOMAIN3.xlsx | Provide the list of all case type and case sub type which are available in OFSECM. | Security Attribute3 Static Information section. |
| DIM_DOMAIN4.xlsx | Provide the list of all organizations that are available in OFSECM. | Security Attribute4 Static Information section. |
| DIM_DOMAIN5.xlsx | Provide the list of all scenario classes which are available in OFSECM. | Security Attribute5 Static Information section. |
| DIM_COUNTRY.xlsx | Provide the list of all countries that need to be made available to the application | Country Information section |
| DIM_STATES.xlsx | Provide the list of all states for the countries that need to be made available to the application. | State Information section |
| FCT_TRANSMITTER_INFO.xlsx | Provide the list of all transmitter information. | Transmitter Information section |
| DIM_FILING_INST.xlsx | Provide the list of all filing institution information. | Filing Institution Information section |
| FCT_BRANCH_INFORMATION.xlsx | Provide the list of all branch information. | Branch Information section |
| FCT_FININSTITUTION_INFORMATION.xlsx | Provide the list of all financial institution. | Financial Institution section |

4. Add data in each Excel sheet as per your report requirement. For more information, see the [Oracle Financial Services Data Model Reference Guide](#).

As a part of USSAR Final Format version 1.1(asc) to version 1.2(xml) upgrade, FinCen has updated codes for various fields. Hence, use the updated code to populate DIM DATA.

4.1.1 Uploading Excel

To upload the Excel sheet, follow these steps:

1. Log in to the OFSCRR application as the Administrator user.
2. Navigate to Compliance Regulatory Reporting. Click **Excel Upload (Atomic)**.

3. Select the **Excel Upload**. The Excel Upload page is displayed.

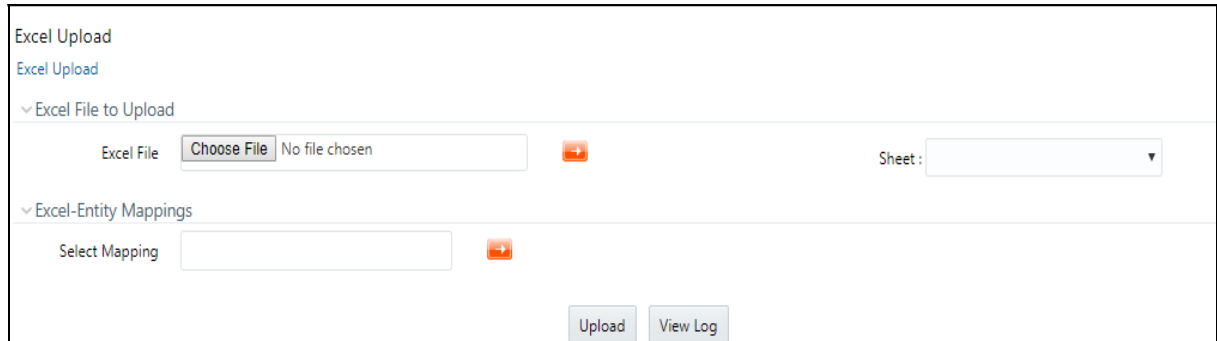


Figure 2: Excel Upload

4. Click **Choose File from** Excel File to Upload. Select the sheet from the drop-down list.
5. In the Excel - Entity Mappings section, click the **Select the Mapping** arrow. Select the table name with the same name as that of the Excel sheet.
6. Click **Upload**. The confirmation message is displayed.

4.2 Loading Product Supplied Metadata

To load the product supplied metadata, follow these steps:

The following steps are applicable if OFSBDF is installed. If OFSCRR is installed as a standalone, then run the SQLs manually in the RR Atomic schema.

1. Copy `AtomicUSSAR.sql` and `AtomicUSSAR.cfg` from the *ProductSuppliedMetadata* folder packaged in the CRR installer kit under the path `OFS_CRR_PACK/OFS_CRR/ProductSuppliedMetadata/USSAR`.
2. Run the SQLs manually in the RR Atomic schema.

4.3 Configuring Security Attributes for Users

To configure security attributes for users, follow these steps:

1. Log in as the Administrator user.
2. Click **User Administration**. The User Attribute page is displayed.
3. Select the user from the User Name drop-down list.
4. Assign attributes to each user from the drop-down list.
5. Click **Save**. The confirmation message is displayed.

5 Integrating with the ECM Application

The OFSECM application is integrated with the OFSCRR application to post cases to generate reports with Webservice calls. For more information about Webservice calls, see the [Oracle Financial Services Webservices Guide](#).

Both OFSECM application and the OFSCRR applications must be configured to use Webservice.

NOTE This is an optional configuration and is required only when you want to integrate the OFSCRR application with the OFSECM application.

This chapter covers the following topics:

- [Configuring Webservice in OFSCRR](#)
- [Configuring CRR Service URL in Atomic Schema](#)
- [Configuring Webservice in OFSECM](#)
- [Configuring Processing Modeling Framework \(PMF\)](#)

5.1 Configuring Webservice in OFSCRR

The OFSCRR application's webservice is already configured with a default user name and password. This default password must be reset before performing the OFSCRR application and the OFSECM application integration. This step is mandatory for security reasons.

To update the password, follow these steps:

1. Log in as the Administrator.
2. Navigate to Compliance Regulatory Reporting application and select the **Administration** option.
3. Select **Webservice Configuration**. The Configuring Web service User ID and Password page is displayed.
4. Enter the User ID as rruser.

NOTE Do not add any other user name.

5. Enter the desired password.
6. Click **Save**. A confirmation message is displayed.

5.2 Configuring CRR Service URL in Atomic Schema

To configure the CRR service URL in the Atomic Schema, execute the following SQL command:

```
UPDATE CRR_CONFIGURATION SET V_PARAM_VALUE= '<URL>'
WHERE V_PARAM_NAME= 'CRR_SERVICE_URL';
commit;
```

5.3 Configuring Webservice in OFSECM

To configure Webservice in the OFSECM application, follow these steps:

1. Login to the OFSECM application as Administrator.
2. Navigate to Financial Services Case Management.
3. Select **Case Management Configuration** and click **Manage Common Parameters** . The Manage Common Parameter page is displayed.
4. Select **Deployment Based** from the Parameter Category drop-down list.
5. Select **Regulatory Report Solution Web Service** from the Parameter Name drop-down list.
6. Set Parameter Value text box = Y.
7. Update the OFSRR web service URL by setting the following attribute values:
 - Attribute1 value = ruser,
 - Attribute 3 Value = /services/InitiateRequest
 - Attribute 4 Value = /CRRframeworkDataingestion

NOTE If you apply Critical Patch Update (CPU) 31341278 - OFS CRR 8.0.8.1.3, replace "services" with "RRSService" in ATTR_3_VALUE_TX column of KDD_INSTALL_PARAM table where PARAM_ID = 7 in atomic schema.

For example, change http://XXX:YYYY/CRR808/services/InitiateRequest to http://XXX:YYYY/CRR808/RRSService/InitiateRequest.

8. Click **Save**. A confirmation message is displayed.

5.3.1 Updating OFSCRR Webservice password in OFSECM

To update the OFSCRR Webservice password in OFSECM, follow these steps:

1. Login to the OFSECM application as the Administrator.
2. Navigate to Financial Services Case Management. Select *Case Management Configuration*.
3. Click **Configuration of Web Service**. The Configuration of Web Service page is displayed.

4. Enter the password for *Regulatory Reporting Web Service* and click **Encrypt**.

NOTE Enter the same password as set in OFSCRR.

5. Logout from the application.

5.4 **Configuring Processing Modeling Framework (PMF)**

The Enterprise Case Management Processing Modeling Framework (PMF) facilitates built-in tooling for orchestration of human and automatic workflow interfaces. This enables the Administrator to create process-based ECM. It also enables the Administrator to model business processes and workflow.

To perform the PMF configuration, see the Configuring PMF chapter in [ECM Administration Guide](#).

6 Configuring Parameters

This chapter covers the following topics:

- Report Lock Period
- Activity Information
- Default Domain 1
- Transferring Primary CUST ACCT Only
- Configuring Multiple Instances

6.1 Report Lock Period

If a user forgets to log off from the OFSRR application or if the OFSRR screen is closed while accessing a report, the report gets locked for a pre-configured duration. By default, the duration is 60 minutes. This duration can be altered as per your requirement.

To alter the duration, execute the following SQL using OFSRR atomic schema user:

```
UPDATE APPLN_PARAMETERS SET V_ATTRIBUTE_VALUE1= '<DURATION IN MINUTES>'
WHERE V_ATTRIBUTE_NAME1= 'LOCK PERIOD IN MINUTES';
COMMIT;
```

6.2 Activity Information

This parameter is set to Y if activity dates/amount has to be imported from AML. If not, the parameter is set to N.

```
UPDATE APPLN_PARAMETERS SET V_ATTRIBUTE_VALUE1 = '<Y or N>' WHERE V_ATTRIBUTE_NAME1 =
'ACTIVITY AMOUNT AND DATES FLAG'COMMIT;
```

6.3 Default Domain 1

This parameter identifies the default jurisdiction assignment while creating a report manually in OFSRR.

Execute the following query in OFSRR atomic schema as required

```
UPDATE APPLN_PARAMETERS SET V_ATTRIBUTE_VALUE2 = '<VALUE OF DEFAULT DOMAIN 1>' WHERE
V_ATTRIBUTE_NAME1 = 'ENABLE DEFAULT DOMAIN1';COMMIT;
```

By default, the flag to enable default domain 1 in the UI is set to Y. OFSRR can be configured not to display any default value for domain 1 in the UI while creating new report by setting the flag to N.

Execute the following query in OFSRR atomic schema as required.

```
UPDATE APPLN_PARAMETERS SET V_ATTRIBUTE_VALUE1 = '<Y or N>' WHERE V_ATTRIBUTE_NAME1 =
'ENABLE DEFAULT DOMAIN1';COMMIT;
```

6.4 Transferring Primary CUST ACCT Only

This parameter defines the accounts that are transferred from the cases to the CRR system.

By default, the flag is set to **Y**, which means that only those accounts which are involved in an activity (case) and for which the subject is a primary customer are transferred to the CRR system.

If you want to bring all the accounts of the subjects involved in an activity (that is, they are part of the case) then set the flag to **N** by executing the below query in the atomic schema.

```
UPDATE APPLN_PARAMETERS SET V_ATTRIBUTE_VALUE1 = 'N' WHERE N_PARAM_IDENTIFIER = 50;
COMMIT;
```

6.5 Configuring Multiple Instances

This configuration enables multiple instances (STRs) of OFS CRR application from the single OFS ECM instance. You can use a single OFS ECM application instance to generate multiple report types.

This section covers the following topics:

- [Configuring Multiple Instance Attribute Flag](#)
- [Configuring PMF](#)
- [Configuring Report URLs](#)
- [Configuring Case Jurisdiction and Report Type Mapping](#)

6.5.1 Configuring Multiple Instance Attribute Flag

To configure multi instances of the OFS CRR application, follow these steps:

1. Login to the OFSECM application as an Administrator.
2. Navigate to Financial Services Case Management.
3. Select **Case Management Configuration** and click **Manage Common Parameters**. The Manage Common Parameter page is displayed.
4. Select **Deployment Based** on the **Parameter Category** drop-down list.
5. Select **Regulatory Report Solution Web Service** from the Parameter Name drop-down list.
6. Set Parameter Value text box = **Y**.
7. Update the multiple instance attribute flag by setting, **Attribute 6 value = Y**.
8. Click **Save**. A confirmation message is displayed.

6.5.2 Configuring PMF

To enable two or more **Generate STR** actions in the OFS ECM application for each STR type, you must configure process modeling framework. For more information, see the *Configuring Processing Modeling Framework* chapter in the [Administration and Configuration Guide](#).

6.5.3 Configuring Report URLs

Login into the ECM Atomic Schema and execute the following SQL statement by replacing the placeholder:

```
update KDD_REG_REPORT_TYPE t set t.REPORT_URL = '<URL for SAR>/services/InitiateRequest' where t.REG_TYPE_CD = 'USSAR';
```

For example, update `KDD_REG_REPORT_TYPE` t set `t.REPORT_URL = 'http://whf00abc:1200/CRR808/services/InitiateRequest'` where `t.REG_TYPE_CD = 'USSAR'`;

6.5.4 Configuring Case Jurisdiction and Report Type Mapping

NOTE

One or more jurisdictions can be mapped to only one Regulatory Report Type if the **isMultiInstance** option is enabled.

For example, if AMEA and APAC are mapped to US SAR, then they cannot be mapped to any other STRs.

In the Enterprise Case Management (ECM) application, case jurisdiction must be mapped to the report type to generate a report in the OFS CRR US SAR application.

To perform this activity, follow these steps:

1. Login into the ECM Atomic Schema and execute the following SQL statement by replacing the following placeholders
 - **##Jurisdiction Code##** : The values for `KDD_JRSDCN_REPORT_TYPE_MAP.JRSDCN_CD` must come from the table `KDD_JRSDCN.JRSDCN_CD`.
 - **##Regulatory Report Type Code##** : The values for `KDD_JRSDCN_REPORT_TYPE_MAP.REG_TYPE_CD` must come from the table `KDD_REG_REPORT_TYPE.REG_TYPE_CD`.

2. Insert into `KDD_JRSDCN_REPORT_TYPE_MAP` values ('##Jurisdiction Code##', '##Regulatory Report Type Code##');

For example, insert into `KDD_JRSDCN_REPORT_TYPE_MAP` values ('JRSD1' , 'RTYP1');

OFSAA Support Contact Details

Raise a Service Request (SR) in [My Oracle Support \(MOS\)](#) for queries related to OFSAA applications.

Send Us Your Comments

Oracle welcomes your comments and suggestions on the quality and usefulness of this publication. Your input is an important part of the information used for revision.

- Did you find any errors?
- Is the information clearly presented?
- Do you need more information? If so, where?
- Are the examples correct? Do you need more examples?
- What features did you like most about this manual?

If you find any errors or have any other suggestions for improvement, indicate the title and part number of the documentation along with the chapter/section/page number (if available) and contact the Oracle Support.

Before sending us your comments, you might like to ensure that you have the latest version of the document wherein any of your concerns have already been addressed. You can access My Oracle Support site which has all the revised/recently released documents.

