

Oracle Financial Services Compliance Regulatory Reporting

goAML Administration Guide

Release 8.1.2.9.0

February 2025

F26032-01

ORACLE®
Financial Services

Copyright © 2025 Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are “commercial computer software” pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

For information on third party licenses, click [here](#).

Document Control

Table 1: Document Control

Revision Number	Revision Date	Change Log
1.6	April 2025	Added Configuring Bulk E-File Download Date Range Limit section.
1.5	February 2025	No content updates for this release.
1.3	September 2024	- Added Configuring Latest Report Format Version section - Added Configuring Look back Period section - Added Configuring Limit for Created Date section - Updated Loading the Client-Specific Data section
1.2	February 2024	Added Configuring E-File Name section.
1.1	October 2023	Added Configuring xdo.cfg for PDF Generation
1.0	June 2023	No content updates for this release.

Contents

1	About This Guide	3
1.1	Who Should Use This Guide	3
1.2	How This Guide is Organized	3
1.3	Where to Find More Information	3
1.4	Conventions	4
2	Administration Workflow	1
3	Setting Users.....	2
3.1	Creating Users.....	2
3.2	Mapping Users To User Groups.....	2
3.3	Logging in and Resetting Password.....	3
4	Loading Data into the OFSCRR Application	4
4.1	Loading the Client-Specific Data	4
4.2	Loading Product Supplied Metadata	9
4.3	Configuring Security Attributes for Users.....	9
5	Integrating with the ECM Application.....	10
5.1	Configuring Webservice in OFSCRR.....	10
5.2	Configuring CRR Service URL in Atomic Schema	10
5.3	Configuring Webservice in OFSECM.....	10
5.4	Configuring Processing Modeling Framework (PMF)	11
6	Configuring Parameters	13
6.1	Configuring Report Lock Period	13
6.2	Configuring Due Date.....	13
6.3	Configuring Currency Code	14
6.4	Configuring UCM Group Name	14
6.5	Configuring Multiple Instances	15
6.6	Configuring xdo.cfg for PDF Generation	16
6.7	Configuring E-File Name	16
6.8	Configuring Latest Report Format Version	17
6.9	Configuring Look back Period.....	17

6.10	Configuring Limit for Created Date.....	18
7	OFSA Support Contact Details.....	19
8	Send Us Your Comments	20

1 About This Guide

This guide provides instructions to configure the Oracle Financial Services Compliance Regulatory Reporting Report (OFSCRR) application.

This chapter covers the following topics:

- [Who Should Use This Guide](#)
- [How This Guide is Organized](#)
- [Where to Find More Information](#)
- [Conventions](#)

1.1 Who Should Use This Guide

The *OFSCRR Administration Guide* is designed for use by Oracle Financial Services Administration users. The list of responsibilities are as follows:

- Configure, maintain, and adjust the system
- Maintain user accounts and roles, archive data, and load data feeds

1.2 How This Guide is Organized

This guide includes the following chapters:

- [Chapter 2, Administration Workflow](#), explains the administration workflow in the OFSCRR application.
- [Chapter 3, Setting Users](#), details the steps involved in creating users.
- [Chapter 4, Loading Data into the OFSCRR Application](#), details the steps for loading client-specific data and product supplied metadata.
- [Chapter 5, Integrating with the ECM Application](#), details the steps involved in the integration of the OFSCRR application with OFSECM.
- [Chapter 6, Configuring Parameters](#), explains the steps to configure the Configure the report lock period, due date, currency code, and UCM group name.

1.3 Where to Find More Information

For more information on OFSCRR application, refer to the following documents in [OHC](#):

- Oracle Financial Services Compliance Regulatory Reporting Installation Guide
- Oracle Financial Services Compliance Regulatory Reporting Data Model Reference Guide
- Oracle Financial Services Compliance Regulatory Reporting Release Notes/ReadMe
- Oracle Financial Services Compliance Regulatory Reporting User Guide
- Oracle Financial Services Compliance Regulatory Reporting Web Services Guide

To find additional information about how Oracle Financial Services solves real business problems, see our website at www.oracle.com/financialservices.

1.4 Conventions

Table 1: Conventions Used in this Guide

Conventions	Descriptions
Italics	- Names of books, chapters, and sections as references - Emphasis
Bold	- An Object of an action (menu names, field names, options, button names) in a step-by-step procedure - Commands typed at a prompt - User input
Monospace	- Directories and subdirectories - File names and extensions - Process names - Code sample, including keywords and variables within a text and as separate paragraphs, and user-defined program elements within a text
Asterisk	Mandatory fields in the User Interface
<Variable>	Substitute input value

2 Administration Workflow

This chapter describes the Administrator workflow in the OFSCRR application.

Figure 1: Administrator workflow

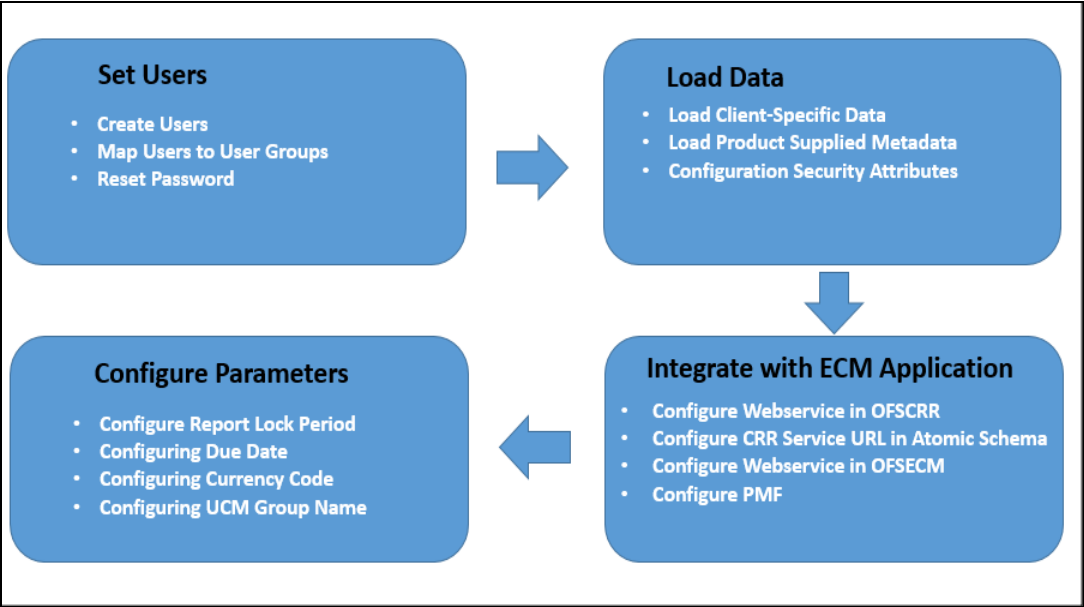


Table 2 lists the administration workflow in tabular format.

Table 2: Administrator workflow

Workflow	Description
Setting Users	Provide access to users in the OFSCRR application through the user groups.
Loading Data into the OFSCRR Application	Load-client specific data and product supplied metadata in the OFSCRR application.
Integrating with the ECM Application	Integrate the OFSECM application with the OFSCRR application to post cases to generate reports with the Webservice calls.
Configuring Parameters	Configure the report lock period, due date, currency code, and UCM group name.

3 Setting Users

This chapter describes how to provide access to users in the OFSCRR application through the user groups and includes the following topics:

- [Creating Users](#)
- [Mapping Users To User Groups](#)
- [Logging in and Resetting Password](#)

3.1 Creating Users

To create users, follow these steps:

1. To create the users, see the *Object Administration* section in the [Oracle Financial Services Analytical Applications Infrastructure User Guide](#).

NOTE

If you are integrating the OFSCRR application with the OFSECM application, it is optional to create the OFSCRR Administrator user. The user mapped to the role of OFSECM Administrator can be mapped to the role of OFSCRR Administrator.

2. Map the users to the predefined user groups, which in turn map to the user role. For more information, see the *Object Administration* section in the [Oracle Financial Services Analytical Applications Infrastructure User Guide](#).

[Table 3](#) provides information about the predefined user groups that are mapped to the created users.

Table 3: Users and Groups

Group Code	Group Name
RREGSUPERVISORGROUP	RR GoAML SUPERVISOR User Group
RREGANALYSTGROUP	RR GoAml ANALYST User Group
RREGAUDITORGROUP	RR GoAml AUDITOR User Group
RRADMINISTRATOR	RRADMINISTRATOR

3.2 Mapping Users To User Groups

[Table 4](#) is used to map the users to pre-defined user groups.

Table 4: Mapping Users to User Groups

User	Group Description
Analyst	RR GoAml ANALYST User Group
Supervisor	RR GoAML SUPERVISOR User Group
Auditor	RR GoAml AUDITOR User Group
Admin User	RRADMINISTRATOR

3.3 Logging in and Resetting Password

To log in and reset password, follow these steps:

1. Log in with each created user in the OFSCRR application. The Password Reset page is displayed.

NOTE This page is displayed when a user logs in for the first time immediately after that user has been created, or every time the SYSADMN user resets the password. For example, when the user forgets the password or when the password is locked.

2. Reset the password. The OFSCRR application login page is displayed.

NOTE You must log in to the application using the new password.

3. The OFSCRR application landing page is displayed. Click **Compliance Regulatory Reporting**.
4. Hover over **goAML**. Select Search and List page, Create New Report, or File Reports to open the OFSCRR application.

NOTE Follow these steps whenever a new user is added or modified (for User Details, User Group mapping, Security Attribute mapping, and Password Change).

4 Loading Data into the OFSCRR Application

This chapter includes the following topics:

- Loading the Client-Specific Data
- Loading Product Supplied Metadata
- Configuring Security Attributes for Users

4.1 Loading the Client-Specific Data

This section explains steps to load the client specific data in to the OFSCRR application.

To load the client-specific data, follow these steps:

1. Navigate to `<ftpshare path>/STAGE/Excelupload/Templates`.
2. The `<ftpshare path>` is the same path given in variable `OFSAAI_FTP` in `OFSAAI_InstallConfig.xml` while installing OFSAAI. For more information, see *Configuring OFSAAI_InstallConfig.xml File* section in the [Oracle Financial Services Compliance Regulatory Reporting Installation Guide](#).
3. Download the following Excel sheets to the Windows machine from the path given in the step 2. [Table 5](#) lists Excel sheets details such as group code, description and so on.

Table 5: Excel Sheets

Excel Name	Table Description	Area of Impact
DIM_DOMAIN1.xlsx	Provides the list of all Jurisdictions which are available in OFSECM.	Security Attribute1 Static Information section.
DIM_DOMAIN1_TL.xlsx	Provides the list of all Jurisdictions which are available in OFSECM for language pack.	Security Attribute1 Static Information section.
DIM_DOMAIN2.xlsx	Provides the list of all Business Domains which are available in OFSECM.	Security Attribute2 Static Information section.
DIM_DOMAIN2_TL.xlsx	Provides the list of all Business Domains which are available in OFSECM for language pack.	Security Attribute2 Static Information section.
DIM_DOMAIN3.xlsx	Provides the list of all Case Type and Case SubTypes which are available in OFSECM.	Security Attribute3 Static Information section.
DIM_DOMAIN3_TL.xlsx	Provides the list of all Case Type and Case SubTypes which are available in OFSECM for language pack.	Security Attribute3 Static Information section.
DIM_DOMAIN4.xlsx	Provides the list of all Organizations that are available in OFSECM.	Security Attribute4 Static Information section.
DIM_DOMAIN4_TL.xlsx	Provides the list of all Organizations that are available in OFSECM for language pack.	Security Attribute4 Static Information section.
DIM_DOMAIN5.xlsx	Provides the list of all Scenario Classes which are available in OFSECM.	Security Attribute5 Static Information section.
DIM_DOMAIN5_TL.xlsx	Provides the list of all Scenario Classes which are available in OFSECM for language pack.	Security Attribute5 Static Information section.
DIM_COUNTRY.xlsx	Provides the list of all Countries that need to be made available to the application	Country Information section
DIM_COUNTRY_TL.xlsx	Provides the list of all Countries that need to be made available to the application for language pack.	Country Information section

Excel Name	Table Description	Area of Impact
DIM_STATES.xlsx	Provides the list of all states for the countries that need to be made available to the application.	State Information section
DIM_STATES_TL.xlsx	Provides the list of all states for the countries that need to be made available to the application for language pack.	State Information section
DIM_REPORT_INDICATORS.xlsx	Provides the list of all report indicators that need to be made available to the application.	Report Indicators Information section
DIM_REPORTING_ENTITY_DTLS.xlsx	Provides the list of all reporting entity details that need to be made available to the application.	Reporting Entity Information section
DIM_REPORTING_ENTITY_DTLS_TL.xlsx	Provides the list of all reporting entity details that need to be made available to the application for language pack.	Reporting Entity Information section
DIM_REPORTING_PERSON.xlsx	Provides the list of all reporting person details that need to be made available to the application.	Reporting Person Information section
DIM_REPORTING_PERSON_TL.xlsx	Provides the list of all reporting person details that need to be made available to the application for language pack.	Reporting Person Information section
DIM_ADDRESS.xlsx	Provides the list of all address that need to be made available to the application.	Address Information section
DIM_CONTACT_TYPE.xlsx	Provides the list of all contact type that need to be made available to the application.	Contact Type Information section
DIM_COMMUNICATION_TYPE.xlsx	Provides the list of all communication types that need to be made available to the application.	Communication Information section
DIM_COMMUNICATION_TYPE_TL.xlsx	Provides the list of all communication types that need to be made available to the application for language pack.	Communication Information section

Excel Name	Table Description	Area of Impact
DIM_PHONE	Provides the list of all phones that need to be made available to the application.	Phone Information section
DIM_IDENTIFICATION	Provides the list of all identifications that need to be made available to the application.	Identification Information section
DIM_FUNDS_TYPE.xlsx	Provides the list of funds type which is used for GOAML STR report type.	Transaction's Involved party Details section
DIM_ACCOUNT_TYPE.xlsx	Provides the list of account type which is used for GOAML STR report type.	Involved Account Details section
DIM_SUSPECT_ID_TYPE.xlsx	Provides the list of Identification type which is used for GOAML STR report type.	All types of Involved party identification's section
DIM_IDENTIFICATION.xlsx	Provides the list of Identification type which is used for GOAML STR report type.	Reporting Person Section
DIM_CURRENCY.xlsx	Provides the list of Currency which is used for GOAML STR report type.	All types of Involved party section for currency type
DIM_TRANSACTION_TYPE.xlsx	Provides the list of Conduction and Transaction Type which is used for GOAML STR report type.	Transaction section
DIM_TRANS_ITEM_STATUS.xlsx	Provides the list of Status transacted items which is used for GOAML STR report type.	Transaction's Goods and Services Details section
DIM_GENDER.xls	Provides the list of Gender Type which is used for GOAML STR report type.	All types of Involved party section for Gender type
DIM_TRANSACTION_ITEM_TYPE.xls	Provides the list of Transacted Item type which is used for GOAML STR report type.	Transaction's Goods and Services Details section
DIM_CONTACT_TYPE.xls	Provides the list of Contact type which is used for GOAML STR report type.	All types of Involved party Phone's section

Excel Name	Table Description	Area of Impact
DIM_COMMUNICATION_TYPE.xls	Provides the list of Communication Type which is used for GOAML STR report type.	All types of Involved party Phone's section
DIM_FINANCIAL_INST_TYPE.xls	Provides the list of Incorporation Legal Form type which is used for GOAML STR report type.	Transaction's Involved Entity party Details section
DIM_ROLE.xlsx	Provides the list of Role Type which is used for GOAML STR report type.	Involved party Details section
ACCOUNT_STATUS_TYPE.xlsx	Provides the list of Account Status type which is used for GOAML STR report type.	Involved Account Details section
FCT_BRANCH_INFO	Provides the list of all branches that need to be made available to the application.	Branch Information section
FCT_BRANCH_INFO_TL.xlsx	Provides the list of all branches that need to be made available to the application for language pack.	Branch Information section
MAP_REPENTITYDTLS_REPTYPE.xlsx	Provides the list of all mapping for reporting entity and GOAML STR report type.	Reporting Entity Details section

NOTE The data provided in the above tables must be updated into E-File XSD enumeration as well.

4. Add data in each Excel sheet as per your report requirement. For more information, see the [Oracle Financial Services Data Model Reference Guide](#).

4.1.1 Uploading Excel

To upload the Excel sheet, follow these steps:

1. Log in to the OFSCRR application as the Administrator user.
2. Navigate to Compliance Regulatory Reporting. Click **Excel Upload (Atomic)**.
3. Select the **Excel Upload**. The Excel Upload page is displayed.

Figure 2: Excel Upload

The screenshot shows a web interface titled "Excel Upload". Below the title is a sub-header "Excel Upload". There are two main sections: "Excel File to Upload" and "Excel-Entity Mappings". In the "Excel File to Upload" section, there is a text input labeled "Excel File" containing "Choose File" and "No file chosen", a red upload icon, and a "Sheet:" dropdown menu. In the "Excel-Entity Mappings" section, there is a text input labeled "Select Mapping" and a red upload icon. At the bottom right, there are two buttons: "Upload" and "View Log".

4. Click **Choose File from** Excel File to Upload. Select the sheet from the drop-down list.
5. In the Excel - Entity Mappings section, click the **Select the Mapping** arrow. Select the table name with the same name as that of the Excel sheet.
6. Click **Upload**. The confirmation message is displayed.

4.2 Loading Product Supplied Metadata

This section explains how to load the pre-packaged data of the OFS CRR application, such as the ISO code of the country, template (CA STR) specific codes, and so on

To load the product supplied metadata, follow these steps:

Execute the SQL AtomicGOAML.sql in the CRR Atomic schema.

This file is packaged in the CRR installer kit under the path OFS_CRR_PACK/OFS_CRR/ProductSuppliedMetadata/GOAML.

4.3 Configuring Security Attributes for Users

To configure security attributes for users, follow these steps:

1. Log in as the Administrator user.
2. Click **User Administration**. The User Attribute page is displayed.
3. Select the user from the User Name drop-down list.
4. Assign attributes to each user from the drop-down list.
5. Click **Save**. The confirmation message is displayed.

5 Integrating with the ECM Application

The OFSECM application is integrated with the OFSCRR application to post cases to generate reports with Webservice calls. For more information about Webservice calls, see the [Oracle Financial Services Webservices Guide](#).

Both OFSECM application and the OFSCRR applications must be configured to use Webservice.

NOTE	This is an optional configuration and is required only when you want to integrate the OFSCRR application with the OFSECM application.
-------------	---

This chapter covers the following topics:

- [Configuring Webservice in OFSCRR](#)
- [Configuring CRR Service URL in Atomic Schema](#)
- [Configuring Webservice in OFSECM](#)
- [Configuring Processing Modeling Framework \(PMF\)](#)

5.1 Configuring Webservice in OFSCRR

The OFSCRR application's webservice is already configured with a default user name and password. This default password must be reset before performing the OFSCRR application and the OFSECM application integration. This step is mandatory for security reasons.

To update the password, follow these steps:

1. Log in as the Administrator.
2. Navigate to Compliance Regulatory Reporting application and select the **Administration** option.
3. Select **Webservice Configuration**. The Configuring Web service User ID and Password page is displayed.
4. Enter the User ID as rruser.

NOTE	Do not add any other user name.
-------------	---------------------------------

5. Enter the desired password.
6. Click **Save**. A confirmation message is displayed.

5.2 Configuring CRR Service URL in Atomic Schema

To configure the CRR service URL in the Atomic Schema, execute the following SQL command:

```
UPDATE CRR_CONFIGURATION SET V_PARAM_VALUE= '<URL>'
WHERE V_PARAM_NAME= 'CRR_SERVICE_URL';
commit;
```

5.3 Configuring Webservice in OFSECM

To configure Webservice in the OFSECM application, follow these steps:

1. Login to the OFSECM application as Administrator.
2. Navigate to Financial Services Case Management.
3. Select **Case Management Configuration** and click **Manage Common Parameters**. The Manage Common Parameter page is displayed.
4. Select **Deployment Based** from the Parameter Category drop-down list.
5. Select **Regulatory Report Solution Web Service** from the Parameter Name drop-down list.
6. Set Parameter Value text box = Y.
7. Update the OFSRR web service URL by setting the following attribute values:
 - Attribute1 value = ruser
 - Attribute 3 Value = <URL>/RRSService/InitiateRequest
 - Attribute 4 Value = <URL>/CRRframeworkDataingestion

NOTE <URL> must be in the following format: http://<Web application server name>:<port>/<context>


8. Click **Save**. A confirmation message is displayed.

5.3.1 Updating OFSCRR Webservice password in OFSECM

To update the OFSCRR Webservice password in OFSECM, follow these steps:

1. Login to the OFSECM application as the Administrator.
2. Navigate to Financial Services Case Management. Select *Case Management Configuration*.
3. Click **Configuration of Web Service**. The Configuration of Web Service page is displayed.

Figure 3: Configuration of Web Service

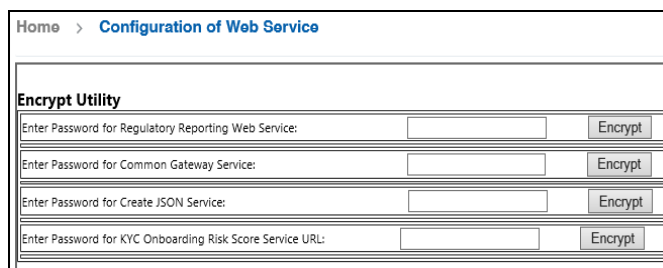

Home > Configuration of Web Service	
Encrypt Utility	
Enter Password for Regulatory Reporting Web Service:	Encrypt
Enter Password for Common Gateway Service:	Encrypt
Enter Password for Create JSON Service:	Encrypt
Enter Password for KYC Onboarding Risk Score Service URL:	Encrypt

4. Enter the password for *Regulatory Reporting Web Service* and click **Encrypt**.

NOTE Enter the same password as set in OFSCRR.

5. Logout from the application.

5.4 Configuring Processing Modeling Framework (PMF)

The Enterprise Case Management Processing Modeling Framework (PMF) facilitates built-in tooling for orchestration of human and automatic workflow interfaces. This enables the Administrator to create process-based ECM. It also enables the Administrator to model business processes and workflow.

To perform the PMF configuration, see the Configuring PMF chapter in [ECM Administration Guide](#).

6 Configuring Parameters

This chapter covers the following topics:

- [Configuring Report Lock Period](#)
- [Configuring Due Date](#)
- [Configuring Currency Code](#)
- [Configuring UCM Group Name](#)
- [Configuring Multiple Instance Attribute Flag](#)
- [Configuring xdo.cfg for PDF Generation](#)
- [Configuring E-File Name](#)
- [Configuring Bulk E-File Download Date Range Limit](#)
- [Configuring Latest Report Format Version](#)
- [Configuring Look back Period](#)
- [Configuring Limit for Created Date](#)

6.1 Configuring Report Lock Period

If a user forgets to log off from the OFSRR application or if the OFSRR screen is closed while accessing a report, the report gets locked for a pre-configured duration. By default, the duration is 60 minutes. This duration can be altered as per your requirement.

To alter the duration, execute the following SQL using OFSRR atomic schema user:

```
UPDATE APPLN_PARAMETERS SET V_ATTRIBUTE_VALUE1= '<DURATION IN MINUTES>'
WHERE V_ATTRIBUTE_NAME1= 'LOCK PERIOD IN MINUTES';
COMMIT;
```

6.2 Configuring Due Date

The due date is set to N days from the date the request is sent from ECM to CRR, where N is a configurable number of days. The N days filing time must exclude both holidays and weekends, that is, it refers specifically to business days. The Due date can be modified by any user, based on the configuration mentioned in the following table

Table 6 lists due date details such as attribute name, value and so on .

Table 6: Due Date

Attribute Name	Value	Default pre-pack aged value	Behavior	SQL
Number of Days	N	5 (Days)	When a CRR report is created manually or through ECM action, it automatically sets due date to action date + N calendar days. If the parameter is blank, then no date is set.	<pre> UPDATE APPLN_PARAMET ERS SET V_ATTRIBUTE_V ALUE1= '<NUMBER OF DAYS>' WHERE N_PARAM_IDENT IFIER= 48; COMMIT;</pre>

6.3 Configuring Currency Code

This field is used to set a currency code for the template.

```

UPDATE APPLN_PARAMETERS SET V_ATTRIBUTE_VALUE1= '<CURRENCY_CODE>'WHERE
N_PARAM_IDENTIFIER=
47;COMMIT;
```

6.4 Configuring UCM Group Name

When you attach a report to the regulatory report, the group code configured in the UCM_GROUP_NAME parameter of the configuration table of AAI is validated. This parameter contains the value of a valid group name that appears during the AAI installation and it is mapped to the business user performing the action.

You can get the value for this parameter by executing the following query in the configuration schema of the AAI application.

```

select PARAMVALUE from
configuration
where PARAMNAME='UCM_GROUP_NAME'
```

To update the above parameter, execute the following query.

```

update CONFIGURATION set PARAMVALUE = 'RRADMINISTRATOR' where PARAMNAME =
'UCM_GROUP_NAME';
```

6.5 Configuring Multiple Instances

This configuration enables multiple instances (STRs) of OFS CRR application from the single OFS ECM instance. You can use a single OFS ECM application instance to generate multiple report types.

This section covers the following topics:

- [Configuring Multiple Instance Attribute Flag](#)
- [Configuring PMF](#)
- [Configuring Report URLs](#)
- [Configuring Case Jurisdiction and Report Type Mapping](#)

6.5.1 Configuring Multiple Instance Attribute Flag

To configure multi instances of the OFS CRR application, follow these steps:

1. Login to the OFSECM application as an Administrator.
2. Navigate to Financial Services Case Management.
3. Select **Case Management Configuration** and click **Manage Common Parameters**. The Manage Common Parameter page is displayed.
4. Select **Deployment Based** on the **Parameter Category** drop-down list.
5. Select **Regulatory Report Solution Web Service** from the Parameter Name drop-down list.
6. Set Parameter Value text box = Y.
7. Update the multiple instance attribute flag by setting, **Attribute 6 value = Y**.
8. Click **Save**. A confirmation message is displayed.

6.5.2 Configuring PMF

To enable two or more **Generate STR** actions in the OFS ECM application for each STR type, you must configure process modeling framework. For more information, see the *Configuring Processing Modeling Framework* chapter in the [Administration and Configuration Guide](#).

6.5.3 Configuring Report URLs

Login into the ECM Atomic Schema and execute the following SQL statement by replacing the placeholder:

```
update KDD_REG_REPORT_TYPE t set t.REPORT_URL = '<URL for STR>/services/InitiateRequest' where t.REG_TYPE_CD = 'goAMLSTR';
```

For example, update KDD_REG_REPORT_TYPE t set t.REPORT_URL = 'http://whf00abc:1200/CRR808/services/InitiateRequest' where t.REG_TYPE_CD = 'goAMLSTR';

6.5.4 Configuring Case Jurisdiction and Report Type Mapping

NOTE

One or more jurisdictions can be mapped to only one Regulatory Report Type if the **Multinstance** option is enabled.

For example, if AMEA and APAC are mapped to goAML STR, then they cannot be mapped to any other STRs.

In the Enterprise Case Management (ECM) application, case jurisdiction must be mapped to the report type to generate a report in the OFS CRR goAML STR application.

To perform this activity, follow these steps:

1. Login into the ECM Atomic Schema and execute the following SQL statement by replacing the following placeholders
 - **##Jurisdiction Code##** : The values for KDD_JRSDCN_REPORT_TYPE_MAP.JRSDCN_CD must come from the table KDD_JRSDCN.JRSDCN_CD.
 - **##Regulatory Report Type Code##** : The values for KDD_JRSDCN_REPORT_TYPE_MAP.REG_TYPE_CD must come from the table KDD_REG_REPORT_TYPE.REG_TYPE_CD.
2. Insert into KDD_JRSDCN_REPORT_TYPE_MAP values ('##Jurisdiction Code##', '##Regulatory Report Type Code##');

For example, insert into KDD_JRSDCN_REPORT_TYPE_MAP values ('JRSD1' , 'RTYP1');

6.6 Configuring xdo.cfg for PDF Generation

xdo.cfg is used to configure font structure for PDF generation.

To configure xdo.cfg for PDF generation, follow these steps:

1. Go to path {deployedpath}/WEB-INF/classes/Reports/Input.
2. Open xdo.cfg file, update the truetype tag with the deployed path


```
<truetype path="{deployedpath}/WEB-INF/classes/Reports/Input/fonts/Arial-Unicode-MS-Font.ttf" />
```

For example,

```
<truetype path="/scratch/devuser/Oracle/Middleware/Oracle_Home/
user_projects/domains/CRR8121APR/applications/CRR8121APR.ear/CRR8121APR.war/
WEB-INF/classes/Reports/Input/fonts/Arial-Unicode-MS-Font.ttf" />
```

6.7 Configuring E-File Name

Use this section to configure the E-file name with Case ID or Report ID while downloading.

NOTE

You must apply 8.1.2.71 (Patch Number-35528743) patch to configure E-File name.

To configure E-File Name, follow these steps:

1. To enable configuring xml file naming convention, run the following query in the atomic schema.

```
UPDATE APPLN_PARAMETERS SET V_ATTRIBUTE_VALUE2='Y' WHERE N_PARAM_IDENTIFIER=47;
```

COMMIT;

2. To configure the display order of CASEID or REPORTID, follow these steps:

The display order of CASEID and REPORTID in an E-File name is based on values (that is, CASEID and REPORTID) in v_attribute_value3 and v_attribute_value4, respectively.

Following are the examples:

```
update appln_parameters t set t.v_attribute_value3 = 'CASEID' where
t.n_param_identifier=47;
```

Example 1 : 99_CRRXMLOUTPUT_<CASEID>_<DateTime>.xml

```
update appln_parameters t set t.v_attribute_value3 = 'REPORTID' where
t.n_param_identifier=47;
```

Example 2 : 99_CRRXMLOUTPUT_<REPID>_<DateTime>.xml;

```
update appln_parameters t set t.v_attribute_value3 = 'REPORTID' , t.v_at-
tribute_value4 = 'CASEID' where t.n_param_identifier=47;
```

Example 3 : 99_CRRXMLOUTPUT_<REPID>_<CASEID>_<DateTime>.xml;

```
update appln_parameters t set t.v_attribute_value3 = 'CASEID' , t.v_at-
tribute_value4 = 'REPORTID' where t.n_param_identifier=47;
```

Example 4 : 99_CRRXMLOUTPUT_<CASEID>_<REPID>_<DateTime>.xml;

6.8 Configuring Bulk E-File Download Date Range Limit

Use this section to configure Bulk E-File Download Date Range Limit for the template.

```
UPDATE APPLN_PARAMETERS SET V_ATTRIBUTE_VALUE8= '<Number of Days>'WHERE
N_PARAM_IDENTIFIER=
```

```
47;
```

```
COMMIT;
```

NOTE

By default, the number of days is set to 5.

For example,

```
UPDATE APPLN_PARAMETERS SET V_ATTRIBUTE_VALUE8= '5' WHERE
N_PARAM_IDENTIFIER=47;
```

```
COMMIT;
```

6.9 Configuring Latest Report Format Version

Use this section to configure the report format version.

To configure report format version, follow these steps:

```
UPDATE APPLN_PARAMETERS SET V_ATTRIBUTE_VALUE7='<latest format version>' WHERE
N_PARAM_IDENTIFIER=47;
```

COMMIT;

NOTE

- Reports mapped to the latest versions will open in *Editable Mode*.
- When you create a new report or posted via ECM, by default report is mapped to latest version.
- Reports having any other versions will open in *Read Only Mode*.
- For Party Role drop-down in Involved parties grid on Transaction information Tab, if you are using old format version, you have to configure latest Report version that is, 5.0.2 in V_FORMAT_VERSION column for table MAP_ROLE_REPTYPE in respective to your new meta data.

6.10 Configuring Look back Period

Use this section to configure look back period for Advanced Search.

To configure look back period for Advanced Search, follow these steps:

```
UPDATE APPLN_PARAMETERS SET V_ATTRIBUTE_VALUE5= '<LOOK BACK PERIOD IN DAYS>'WHERE  
N_PARAM_IDENTIFIER=47;
```

COMMIT;

NOTE

Default value for Look back Period is 3 days.

6.11 Configuring Limit for Created Date

Use this section to configure maximum limit for created dated in the Advanced Search.

To configure maximum limit for created dated in the Advanced Search, follow these steps:

```
UPDATE APPLN_PARAMETERS SET V_ATTRIBUTE_VALUE6= '<LIMIT FOR CREATED DATE>'WHERE  
N_PARAM_IDENTIFIER=47;
```

COMMIT;

NOTE

Default value for Created Date is 365 days.

OFSAA Support Contact Details

Raise a Service Request (SR) in [My Oracle Support \(MOS\)](#) for queries related to OFSAA applications.

Send Us Your Comments

Oracle welcomes your comments and suggestions on the quality and usefulness of this publication. Your input is an important part of the information used for revision.

- Did you find any errors?
- Is the information clearly presented?
- Do you need more information? If so, where?
- Are the examples correct? Do you need more examples?
- What features did you like most about this manual?

If you find any errors or have any other suggestions for improvement, indicate the title and part number of the documentation along with the chapter/section/page number (if available) and contact the Oracle Support.

Before sending us your comments, you might like to ensure that you have the latest version of the document wherein any of your concerns have already been addressed. You can access My Oracle Support site which has all the revised/recently released documents.

