

# **Oracle Financial Services Compliance Studio**

**Installation Guide**

**Release 8.1.2.3.0**

**December 2023**

**F48800-01**

**ORACLE®**

**Financial Services**

## OFS Compliance Studio Installation Guide

Copyright © 1994, 2023, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for

and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

# Document Control

Table 1 lists the document control of this guide:

**Table 1: Document Control**

Version Number	Revision Date	Change Log
8.1.2.3.0	December 2023	Updated step 1 in the <a href="#">Configure the resources.xml for Graph Schema</a> section.
8.1.2.3.0	July 2023	Updated steps in the <a href="#">Generate truststore File for Elasticsearch</a> section. Added the <a href="#">Upgrade Steps for Graph Pipeline from 8.1.2.1.0 to 8.1.2.3.0</a> section.
8.1.2.3.0	January 2023	Added the following sections: <ul style="list-style-type: none"> <li>• <a href="#">Generate truststore File for Elasticsearch</a></li> <li>• <a href="#">Configure ER schema Profile</a></li> <li>• <a href="#">Post Upgrade Steps in case ER Batches are Executed before Upgrade</a></li> <li>• <a href="#">Upgrade Scenario</a></li> </ul> Added steps in the <a href="#">Upgrade Steps with OFSAA</a> section. Added a note related to upgrade scenario in the following sections: <ul style="list-style-type: none"> <li>• <a href="#">Configure the Elastic Search Component</a></li> <li>• <a href="#">Place Files in the Installation Directories</a></li> <li>• <a href="#">Add Synonyms and Stopword files in Elastic Search</a></li> <li>• <a href="#">Generate the Public and Private Keys</a></li> <li>• <a href="#">Generate API token for CS API User</a></li> <li>• <a href="#">Place the Key Store File for Secure Batch Service</a></li> <li>• <a href="#">Configure the config.sh File</a></li> <li>• <a href="#">Generate the Graph-keystore.p12 File</a></li> <li>• <a href="#">Configure the PGX Service</a></li> </ul>
8.1.2.1.0	January 2023	Updated note in the following sections: <ul style="list-style-type: none"> <li>• <a href="#">Perform the OFSAA Configuration for Batch Execution</a></li> <li>• <a href="#">Configure and Run Published Notebooks</a></li> </ul>
8.1.2.1.0	December 2022	Added the following sections: <ul style="list-style-type: none"> <li>• <a href="#">Create the Tablespace</a></li> <li>• <a href="#">Download the Elastic Search Rest High Client Dependency</a></li> <li>• <a href="#">Create the Sandbox Schema</a></li> <li>• <a href="#">Assign Grants for the Sandbox Schema</a></li> <li>• <a href="#">Generate the Graph-keystore.p12 File</a></li> <li>• <a href="#">Appendix G - Jars for Elastic Search</a></li> </ul>

**Table 1: Document Control**

Version Number	Revision Date	Change Log
8.1.2.1.0	December 2022	<p>Updated the following:</p> <ul style="list-style-type: none"> <li>• Updated script and note in the <a href="#">Create the Studio Schema</a> section.</li> <li>• Updated significance of these parameters API_USERS, VALID_ROLES, and FCC_API_USER in the <a href="#">Configure the config.sh File</a> section.</li> <li>• Updated step 2 in the <a href="#">Generate API token for CS API User</a> section.</li> <li>• Added a ES_JARS_LOCATION parameter and removed the ES8compatibility in the <a href="#">config.sh file</a> section.</li> <li>• Updated Elastic Search version in the <a href="#">Hardware and Software Requirements</a> section.</li> </ul>
8.1.2.1.0	November 2022	<p>Added a note and updated the value of <b>maxTotal</b> in the <a href="#">Configure the resources.xml for Multiple ER Schemas</a> section.</p>
8.1.2.1.0	October 2022	<p>Added a new sub-step (19.d) in the <a href="#">Frequently Asked Questions in Compliance Studio</a> section.</p> <p>Added FAQ on interpreter settings and upgrade the python virtual environment for the fcc-python interpreter in the <a href="#">Frequently Asked Questions in Compliance Studio</a> section.</p>
8.1.2.1.0	September 2022	<p>Updated version in the <a href="#">Introduction</a> section.</p> <p>Updated versions in the <a href="#">Hardware and Software Requirements</a> section.</p> <p>Updated a note in the PGX server of the <a href="#">Prerequisite Environmental Settings</a> section.</p> <p>Added a note in the following sections:</p> <ul style="list-style-type: none"> <li>• <a href="#">Download the Big Data Files</a></li> <li>• <a href="#">Validation Checklist</a></li> <li>• <a href="#">Create the Hive Schema</a></li> <li>• <a href="#">Create the Credential Keystore</a></li> <li>• <a href="#">Place Files in the Installation Directories</a></li> <li>• <a href="#">Starting Compliance Studio</a></li> </ul> <p>Updated paths in the <a href="#">Spark Interpreter with remote spark cluster</a> section.</p> <p>Added new grants, which are related to graph schema in the <a href="#">Assign Grants for the Studio Schema</a> and <a href="#">Clean up for Compliance Studio Schema</a> sections.</p>

**Table 1: Document Control**

Version Number	Revision Date	Change Log
8.1.2.1.0	September 2022	<p>Added the following sections:</p> <ul style="list-style-type: none"><li>● Port Numbers for Application</li><li>● Graph Schema</li><li>● Configure the resources.xml for Graph Schema</li><li>● Place the Key Store File for Secure Batch Service</li><li>● Add the Studio Service (SSL) to PGX Configuration</li><li>● Loading the graph generated from the Graph Pipeline</li><li>● Configure the PGX Service</li><li>● Importing OOB Graph Definition and related Metadata</li><li>● Mapping Graph Datasource in Compliance Studio Workspace</li><li>● Using Graph Definition</li><li>● Graph Service</li><li>● Cleanup Steps when Import Failed in Graph Pipeline</li><li>● Configure the PGX Interpreter</li><li>● Generate Signed Certificate</li><li>● Batchservice and Metaservice</li></ul> <p>Updated steps in the following sections:</p> <ul style="list-style-type: none"><li>● Generate the Public and Private Keys</li><li>● Generate API token for CS API User</li><li>● Perform Extract Transfer and Load (ETL) Cleanup</li><li>● Appendix A - Change Port Numbers for the Applicable Services</li><li>● Sample spark-default.conf Configuration File</li></ul> <p>Updated parameters in the config.sh file of the <a href="#">Configure the config.sh File</a> section.</p> <p>Added steps 6 and 7 in the <a href="#">Upgrade from 8.0.8.2.0 to 8.1.2.3.0</a> section.</p> <p>Updated post-upgrade steps in the following sections:</p> <ul style="list-style-type: none"><li>● <a href="#">Upgrade from 8.1.1.0 to 8.1.2.3.0</a></li><li>● <a href="#">Upgrade from 8.1.2.0.0 to 8.1.2.3.0</a></li><li>● <a href="#">Upgrade from 8.1.2.0.1 to 8.1.2.3.0</a></li></ul> <p>Updated tables in the <a href="#">Stop the PGX Service</a> and <a href="#">Upgrade Steps without OFSAA</a> sections.</p> <p>Removed the following sections:</p> <ul style="list-style-type: none"><li>● Generate the Key Store File for Secure Batch Service</li><li>● Install the PGX Service</li><li>● Configure the jdbc interpreter</li></ul>

**Table 1: Document Control**

Version Number	Revision Date	Change Log
8.1.2.1.0	September 2022	<p>Updated with note information for CDH in the following sections:</p> <ul style="list-style-type: none"><li>• <a href="#">Hardware and Software Requirements (Big data)</a></li><li>• <a href="#">Download the Big Data Files (Additional jars)</a></li><li>• <a href="#">Appendix C – Additional Jars – PGX</a></li><li>• <a href="#">Appendix D – Additional Jars – Batch Service</a></li></ul> <p>Updated with correct reference topics in <a href="#">Configure the Extract Transfer and Load (ETL) Process</a> section.</p> <p>Updated <a href="#">Installing Analytics ICU Plugin</a> section.</p> <p>Updated <a href="#">Generate API token for CS API User</a> section.</p> <p>Updated ECM patch for Typology scenario-ECM integrations in the <a href="#">Pre-installation</a> section.</p> <p>Added new steps from 19 to 31 in the <a href="#">Frequently Asked Questions in Compliance Studio</a> section.</p>
8.1.2.0.1	May 2022	<p>As part of this release, the following sections are updated:</p> <ul style="list-style-type: none"><li>• Updated the upgrade version, steps in Installation Checklist table with OFSAA and without OFSAA in the <a href="#">Introduction</a> section.</li><li>• Updated bug number in <a href="#">Download the Installer Kit</a> section.</li><li>• Updated the notes in STUDIO_DB_SID and AUTOMIC_DB_SID in the <a href="#">Configure the config.sh File</a> section.</li><li>• Updated the <a href="#">Place Files in Wallet</a> section.</li><li>• Updated steps in <a href="#">Stop the PGX Service</a> and <a href="#">Upgrade Steps without OFSAA</a> sections.</li><li>• Added <a href="#">Upgrade from 8.1.2.0.0 to 8.1.2.3.0</a> section.</li><li>• Added <a href="#">Perform Cleanup for Entity Resolution</a> section.</li><li>• Added <a href="#">Appendix F – Create Users, Groups, and Mappings</a> section.</li></ul>

**Table 1: Document Control**

Version Number	Revision Date	Change Log
8.1.2.0.0	April 2022	<p>Removed the following:</p> <ul style="list-style-type: none"><li>• Configure the ore Interpreter section.</li><li>• Configure the fcc-python interpreter section.</li><li>• ORE Interpreter settings from Configure the config.sh File section.</li><li>• Generate an Encrypted Password for the Elastic Search section.</li><li>• One permission from <a href="#">Clean up for Compliance Studio Schema</a> section.</li><li>• FAQ 16 in the <a href="#">Frequently Asked Questions in Compliance Studio</a> section.</li></ul> <p>Updated the following:</p> <ul style="list-style-type: none"><li>• Modified the component versions in the <a href="#">Hardware and Software Requirements</a> table for Elastic Search, Logstash, and ES Hadoop Jars.</li><li>• Updated the note in <a href="#">Configure the Extract Transfer and Load (ETL) Process</a> section.</li><li>• Updated <a href="#">Loading sample graph without running ETL</a> section.</li><li>• Updated the description in STUDIO_DB_ENCRYPTED_PASSWORD, ELASTIC_SEARCH_ENCRYPTED_PASSWORD, ENCRYPTED_QUANTIFIND_TOKEN parameters and modified the note in <a href="#">Configure the config.sh File</a> section.</li><li>• Updated significance for parameters in the table in <a href="#">Configure the PGX Service</a> table.</li></ul> <p>Added the following:</p> <ul style="list-style-type: none"><li>• <a href="#">Configure Logstash</a> section.</li><li>• Added a note in <a href="#">Create the Studio Schema</a> section.</li><li>• Added a note in <a href="#">Assign Grants for the Studio Schema</a> section.</li><li>• Added a note in the <a href="#">Clean up for Compliance Studio Schema</a> section.</li><li>• Added a note in <a href="#">Loading sample graph without running ETL</a> section.</li><li>• FAQ 18 in the <a href="#">Frequently Asked Questions in Compliance Studio</a> section.</li><li>• Note in <a href="#">Appendix C – Additional Jars – PGX</a> chapter.</li></ul>



**Table 1: Document Control**

Version Number	Revision Date	Change Log
8.1.2.0.0	March 2022	<p>Updated the following sections:</p> <ul style="list-style-type: none"> <li>• Updated <a href="#">Hardware and Software Requirements</a> table.</li> <li>• Added pgx-python in the <a href="#">Configure the Interpreter Settings</a></li> <li>• <a href="#">Configure the Spark Interpreter</a></li> <li>• Updated for Entity Resolution in the <a href="#">Assign Grants for the Studio Schema</a></li> <li>• <a href="#">Download the Installer Kit</a></li> <li>• <a href="#">Extract the Installer Kit</a></li> <li>• <a href="#">Generate the Public and Private Keys</a></li> <li>• Updated UI screenshots in the <a href="#">Configure Python Interpreter Setting</a></li> <li>• Updated API_USERS and SSO_TOKEN parameter in the <a href="#">Configure the config.sh File</a></li> <li>• Added from 13 to 18 FAQs in the <a href="#">Frequently Asked Questions in Compliance Studio</a></li> <li>• Updated aopalliance-1.0.jar in <a href="#">Appendix C – Additional Jars – PGX</a></li> </ul> <p>Added the following sections:</p> <ul style="list-style-type: none"> <li>• <a href="#">Upgrade from 8.0.8.2.0 to 8.1.2.3.0</a></li> <li>• <a href="#">Upgrade from 8.1.1.1.0 to 8.1.2.3.0</a></li> <li>• <a href="#">Generate API token for CS API User</a></li> <li>• <a href="#">Perform Cleanup for Templates</a></li> <li>• <a href="#">Perform Cleanup for Interpreters</a></li> <li>• <a href="#">Sample spark-default.conf Configuration File</a></li> </ul>
8.1.1.1.0	December 2021	The <a href="#">Appendix E – Apache Log4j Security Alert CVE-2021-44228 Patch Details</a> section is added for the <a href="#">Patch 33684394</a> release.
8.1.1.1.0	November 2021	This is created for the v8.1.1.1.0 release.
8.1.1.0.0	October 2021	This is created for the v8.1.1.0.0 release.

---

# Table of Contents

<b>1</b>	<b>Preface .....</b>	<b>14</b>
1.1	Audience .....	14
1.2	Related Documents.....	14
1.3	Conventions .....	14
1.4	Abbreviations .....	15
<b>2</b>	<b>Introduction .....</b>	<b>16</b>
2.1	Installation Checklist when Studio is installed with OFSAA .....	16
2.2	Installation Checklist when Studio is installed without OFSAA .....	18
<b>3</b>	<b>Pre-installation.....</b>	<b>20</b>
3.1	Hardware and Software Requirements .....	20
3.1.1	<i>System Configuration</i> .....	23
3.1.2	<i>Port Numbers for Application</i> .....	23
3.1.3	<i>Prerequisite Environmental Settings</i> .....	24
3.1.4	<i>Download the Big Data Files</i> .....	25
3.1.5	<i>Download the Elastic Search Rest High Client Dependency</i> .....	26
3.1.6	<i>Validation Checklist</i> .....	27
3.1.7	<i>Configure the Elastic Search Component</i> .....	28
3.1.8	<i>Configure Logstash</i> .....	32
3.1.9	<i>Installing Analytics ICU Plugin</i> .....	33
3.1.10	<i>Configure the Interpreter Settings</i> .....	33
3.1.11	<i>Create the Hive Schema</i> .....	40
3.1.12	<i>Create the Tablespace</i> .....	41
3.1.13	<i>Create the Studio Schema</i> .....	41
3.1.14	<i>Assign Grants for the Studio Schema</i> .....	41
3.1.15	<i>Create the Sandbox Schema</i> .....	42
3.1.16	<i>Assign Grants for the Sandbox Schema</i> .....	43
3.1.17	<i>Graph Schema</i> .....	43
3.1.18	<i>Entity Resolution</i> .....	45
3.2	Setup Password Stores with Oracle Wallet .....	47

---

3.2.1	<i>Setup the Password Stores for Database User Accounts</i>	47
3.2.2	<i>Verify the Connectivity of the Wallet</i>	49
3.2.3	<i>Create the Credential Keystore</i>	50
3.2.4	<i>Download the Installer Kit</i>	52
<b>4</b>	<b>Installation</b>	<b>53</b>
4.1	Extract the Installer Kit	53
4.2	Place Files in the Installation Directories	54
4.3	Add Synonyms and Stopword files in Elastic Search	55
4.4	Place Files in Wallet	56
4.5	Generate an Encrypted Password	56
4.6	Generate the Public and Private Keys	57
4.7	Generate API token for CS API User	57
4.8	Generate Compliance Studio Server SSL Configuration Mandatory File	58
4.8.1	<i>Generate Self-signed Certificate</i>	58
4.8.2	<i>Generate Signed Certificate</i>	58
4.9	Place the Key Store File for Secure Batch Service	60
4.10	Add the Studio Service (SSL) to PGX Configuration	60
4.11	Configure the Extract Transfer and Load (ETL) Process	60
4.11.1	<i>Loading Graphs</i>	61
4.12	Apply Fine-Grained access control and Redaction Changes for Compliance Studio	63
4.13	Configure the config.sh File	63
4.14	Configure the resources.xml for Multiple ER Schemas	114
4.15	Configure the resources.xml for Graph Schema	117
4.16	Run the Compliance Studio Installer	118
4.16.1	<i>Installing/Upgrading for the first time</i>	118
4.16.2	<i>Starting Compliance Studio</i>	119
4.16.3	<i>Stopping Compliance Studio</i>	120
4.16.4	<i>Restarting Compliance Studio</i>	120
4.16.5	<i>Reinstalling Compliance Studio</i>	120
4.17	Generate the Graph-keystore.p12 File	120
4.18	Configure the PGX Service	121

---

4.19	Run ER in different workspaces .....	126
<b>5</b>	<b>Post-installation Steps when OFSAA is installed .....</b>	<b>129</b>
5.1	Verify the Installation .....	129
5.2	Start the PGX Service.....	129
5.3	Access the Compliance Studio Application .....	130
5.4	Perform the OFSAA Configuration for Batch Execution.....	130
5.5	Configure and Run Published Notebooks.....	131
5.6	Importing OOB Graph Definition and related Metadata.....	131
5.6.1	<i>Cleanup Steps when Import Failed in Graph Pipeline .....</i>	<i>132</i>
5.7	Mapping Graph Datasource in Compliance Studio Workspace .....	132
5.8	Using Graph Definition .....	132
<b>6</b>	<b>Post-installation Steps when OFSAA is Not Installed .....</b>	<b>133</b>
6.1	Verify the Installation .....	133
6.2	Start the PGX Service.....	133
6.3	Access the Compliance Studio Application .....	133
<b>7</b>	<b>Upgrade.....</b>	<b>135</b>
7.1	Upgrade Steps with OFSAA .....	136
7.2	Pre-Upgrade Steps.....	137
7.3	Additional Upgrade Steps .....	137
7.3.1	<i>Upgrade from 8.0.8.2.0 to 8.1.2.3.0 .....</i>	<i>137</i>
7.3.2	<i>Upgrade from 8.1.1.1.0 to 8.1.2.3.0 .....</i>	<i>139</i>
7.3.3	<i>Upgrade from 8.1.2.0.0 to 8.1.2.3.0 .....</i>	<i>140</i>
7.3.4	<i>Upgrade from 8.1.2.0.1 to 8.1.2.3.0 .....</i>	<i>141</i>
7.3.5	<i>Upgrade Steps for Graph Pipeline from 8.1.2.1.0 to 8.1.2.3.0 .....</i>	<i>142</i>
7.4	Cleanup for Upgrade .....	142
7.4.1	<i>Perform Extract Transfer and Load (ETL) Cleanup .....</i>	<i>142</i>
7.4.2	<i>Perform Cleanup for Templates .....</i>	<i>143</i>
7.4.3	<i>Perform Cleanup for Interpreters .....</i>	<i>144</i>
7.4.4	<i>Perform Cleanup for Entity Resolution .....</i>	<i>145</i>
7.5	Stop the PGX Service .....	145
7.6	Stop the Compliance Studio Installer.....	145

---

7.7	Upgrade Steps without OFSAA .....	145
7.8	Configure Python Interpreter Setting .....	146
7.9	Configure Interpreters after Upgrade .....	147
<b>8</b>	<b>Reinstall Compliance Studio .....</b>	<b>149</b>
8.1	Clean up for Compliance Studio Schema.....	149
8.2	Cleanup for BD or ECM Atomic Schema .....	150
<b>9</b>	<b>Appendix A - Change Port Numbers for the Applicable Services .....</b>	<b>151</b>
9.1	Server .....	151
9.2	Batchservice and Metaservice .....	151
9.3	Interpreter Service.....	151
9.4	PGX Service.....	152
9.5	Graph Service .....	152
9.6	Matching Service .....	152
9.7	Entity Resolution Service .....	152
<b>10</b>	<b>Appendix B – Spark or PySpark Interpreter .....</b>	<b>153</b>
10.1	Spark Interpreter User Impersonation.....	160
10.2	Sample spark-default.conf Configuration File.....	160
<b>11</b>	<b>Frequently Asked Questions (FAQs) and Error Dictionary .....</b>	<b>162</b>
11.1	Frequently Asked Questions in Compliance Studio .....	162
<b>12</b>	<b>Appendix C – Additional Jars – PGX .....</b>	<b>181</b>
<b>13</b>	<b>Appendix D – Additional Jars – Batch Service .....</b>	<b>183</b>
<b>14</b>	<b>Appendix E – Apache Log4j Security Alert CVE-2021-44228 Patch Details .....</b>	<b>185</b>
<b>15</b>	<b>Appendix F – Create Users, Groups, and Mappings.....</b>	<b>186</b>
<b>16</b>	<b>Appendix G - Jars for Elastic Search .....</b>	<b>188</b>
16.1	Download the Elastic Search Jars Using Gradle .....	188
<b>17</b>	<b>OFSAA Support .....</b>	<b>190</b>
<b>18</b>	<b>Send Us Your Comments.....</b>	<b>191</b>

# 1 Preface

This section provides the Oracle Financial Services (OFS) Compliance Studio Installation Guide information.

## Topics:

- [Audience](#)
- [Related Documents](#)
- [Conventions](#)
- [Abbreviations](#)

## 1.1 Audience

OFS Compliance Studio Installation Guide is intended for System Engineers who are responsible for installing and maintaining the application.

This document assumes that you have experience in installing Enterprise components and basic knowledge about the following:

- UNIX commands
- Database concepts
- Big Data concepts

## 1.2 Related Documents

You can strive to keep this and all other related documents updated regularly; visit the [OHC Documentation Library](#) to download the latest version available there. The list of related documents is provided here.

- [Oracle Financial Services Compliance Studio Administration and Configuration Guide](#)
- [Oracle Financial Services Compliance Studio User Guide](#)
- [Oracle Financial Services Compliance Studio Matching Guide](#)
- [Oracle Financial Services Compliance Studio Data Model Guide](#)
- [Oracle Financial Services Compliance Studio Release Notes](#)
- [Oracle Financial Services Compliance Studio Use Case Guide](#)

## 1.3 Conventions

[Table 2](#) lists text conventions are used in this document.

**Table 2: Document Conventions**

Convention	Meaning
boldface	Boldface type indicates graphical user interface elements associated with an action or terms defined in text or the glossary.
italic	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.

**Table 2: Document Conventions**

Convention	Meaning
monospace	Monospace type indicates commands within a paragraph, URLs, code in examples, file names, text on the screen, or text you enter.
Hyperlink	Hyperlink type indicates the links to external websites and internal document links to sections.

## 1.4 Abbreviations

Table 3 lists the abbreviations used in this document.

**Table 3: Abbreviations**

Abbreviation	Meaning
OFS	Oracle Financial Services
Compliance Studio	Oracle Financial Services Compliance Studio
OFSAA	Oracle Financial Services Analytical Application
BD	Behavior Detection
FCDM	Financial Crime Data Model
ICIJ	International Consortium of Investigative Journalists
IDCS	Oracle Identity Cloud Service
ECM	Enterprise Case Management
SSO	Single Sign-On
SSH	Secure Shell

## 2 Introduction

OFS Compliance Studio is an advanced analytics application that supercharges anti-financial crime programs for better customer due diligence, transaction monitoring, and investigations by leveraging the latest innovations in artificial intelligence, open-source technologies, and data management. It combines Oracle's Parallel Graph Analytics (PGX), Machine Learning for AML, Entity Resolution, and notebook-based code development. It enables Contextual Investigations in one platform with complete and robust model management and governance functionality.

This chapter provides the information required to understand the installation of the OFS Compliance Studio application.

This release (v8.1.2.3.0) of Compliance Studio can be used for the following:

- To install a new instance of Compliance Studio as follows:
- Compliance Studio with OFSAA (Oracle Financial Services Analytical Application). Here, OFSAA is with Behavior Detection (BD) or Enterprise Case Management (ECM).
- Compliance Studio without OFSAA

To upgrade an existing instance of Compliance Studio as follows:

- Upgrade FCC Studio from v8.0.8.2.0 onwards to Compliance Studio v8.1.2.3.0.  
Or
- Upgrade Compliance Studio from v8.1.1.1.0 onwards to Compliance Studio v8.1.2.3.0.  
Or
- Upgrade Compliance Studio from v8.1.2.0.0 onwards to Compliance Studio v8.1.2.3.0.  
Or
- Upgrade Compliance Studio from v8.1.2.0.1 onwards to Compliance Studio v8.1.2.3.0.  
Or
- Upgrade Compliance Studio from v8.1.2.1.0 onwards to Compliance Studio v8.1.2.3.0.

**Topics:**

- [Installation Checklist when Studio is installed with OFSAA](#)
- [Installation Checklist when Studio is installed without OFSAA](#)

### 2.1 Installation Checklist when Studio is installed with OFSAA

To complete the installation process, you must perform the steps listed in the [Table 4](#) checklist. Use this checklist to verify whether these steps are completed or not. Click the reference link to go to the topic.

**Table 4: Installation Checklist**

Sl. No.	Activity	Mandatory	Description
	<b>Pre-installation Steps</b>		-



**Table 4: Installation Checklist**

1	Install all the prerequisite <b>Hardware and Software Requirements</b> .	Yes	-
2	Setup the environmental settings ( <b>System Configuration</b> ).	Yes	-
3	<b>Download the Big Data Files</b>	No	It is required for graph analytics and leverages fragmented data or as a datasource for models.
4	<b>Configure the Elastic Search Component</b>	No	It is required for graph analytics and leverage fragmented data or for matching service and Entity Resolution
5	<b>Configure the Interpreter Settings</b>	Yes	-
6	<b>Create the Studio Schema</b>	Yes	-
7	<b>Assign Grants for the Studio Schema</b>	Yes	-
8	<b>Setup Password Stores with Oracle Wallet</b>	Yes	-
9	<b>Create the Credential Keystore</b>	No	It is required for graph analytics and leverages fragmented data or as a datasource for models
10	<b>Download the Installer Kit</b>	Yes	-
	<b>Installation Steps</b>		-
1	<b>Extract the Installer Kit</b>	Yes	-
2	<b>Place Files in the Installation Directories</b>	Yes	-
3	<b>Generate an Encrypted Password</b>	Yes	-
4	<b>Generate the Public and Private Keys</b>	Yes	-
5	<b>Generate API token for CS API User</b>	Yes	-
6	<b>Place the Key Store File for Secure Batch Service</b>	Yes	-
7	<b>Add the Studio Service (SSL) to PGX Configuration</b>	Yes	-
8	<b>Configure the Extract Transfer and Load (ETL) Process</b>	No	It is required for graph analytics and leveraging fragmented data
9	<b>Configure the config.sh File</b>	Yes	-
10	<b>Run the Compliance Studio Installer</b>	Yes	-
11	<b>Configure the PGX Service</b>	Yes	-
	<b>Post-Installation Steps</b>		-
1	<b>Verify the Installation</b>	Yes	-

**Table 4: Installation Checklist**

2	Start the PGX Service	Yes	-
3	Access the Compliance Studio Application	Yes	-
4	Perform the OFSAA Configuration for Batch Execution	No	It is required if leverage OFSAA's scheduling and executing capability.
5	Configure and Run Published Notebooks	No	It is required if leveraging OFSAA's batch execution.

## 2.2 Installation Checklist when Studio is installed without OFSAA

To complete the installation process, you must perform the steps listed in the [Table 5](#) checklist. Use this checklist to verify whether these steps are completed or not. Click the reference link to go to the topic.

**Table 5: Installation Checklist**

Sl. No.	Activity	Mandatory	Details
	<b>Pre-installation Steps</b>		
1	Install all the prerequisite <a href="#">Hardware and Software Requirements</a> .	Yes	-
2	Setup the environmental settings ( <a href="#">System Configuration</a> ).	Yes	-
3	<a href="#">Configure the Interpreter Settings</a>	Yes	-
4	<a href="#">Create the Studio Schema</a>	Yes	-
5	<a href="#">See the Configure the resources.xml for Multiple ER Schemas section for more details.</a>	Yes	-
6	<a href="#">Setup Password Stores with Oracle Wallet</a>	Yes	-
7	<a href="#">Create the Credential Keystore</a>	Yes	-
8	<a href="#">Download the Installer Kit</a>	Yes	-
	<b>Installation Steps</b>		
1	<a href="#">Extract the Installer Kit</a>	Yes	-
2	<a href="#">Place Files in the Installation Directories</a>	Yes	-
3	<a href="#">Generate an Encrypted Password</a>	Yes	-
4	<a href="#">Generate the Public and Private Keys</a>	Yes	-
5	<a href="#">Generate API token for CS API User</a>	Yes	-
6	<a href="#">Place the Key Store File for Secure Batch Service</a>	Yes	-
7	<a href="#">Configure the config.sh File</a>	Yes	-

**Table 5: Installation Checklist**

8	Run the Compliance Studio Installer	Yes	-
	<b>Post-Installation Steps</b>		
1	Verify the Installation	Yes	-
2	Access the Compliance Studio Application	Yes	-

## 3 Pre-installation

This chapter provides information about the tasks that must be performed before installing Compliance Studio. To install Compliance Studio with OFSAA, ensure the Behavior Detection (BD) or the Enterprise Case Management (ECM) application pack is installed.

The following patches are required only when integrating with old versions for ECM:

- On top of ECM 8.0.8.0.0, apply the following ECM patch for ML-ECM integrations.  
8.0.8.0.28 (BUG: **31497997**)
- On top of ECM 8.0.8.1.0, apply the following ECM patch for ML-ECM integrations.  
8.0.8.1.4 (BUG: **33395125**)

**NOTE** From ECM 8.1.1.0.0 and later versions, the above patches are not required for ML-ECM integrations.

- On top of ECM 8.1.2.0.0, apply the following ECM patch for Typology scenario-ECM integrations.  
8.1.2.0.8 (BUG: **34337520**)

Verify the **AIF\_USER\_TS** and **AIF\_USER\_TEMP\_TS** are available in the BD production database server. If not, then you need to create a tablespace. For information about how to create a tablespace, see [Create the Tablespace](#) section.

After creating a tablespace, you need to provide a quota on the tablespace **AIF\_USER\_TS** and **AIF\_USER\_TEMP\_TS**.

For example:

```
ALTER USER <BD ATOMIC SCHEMA USER> QUOTA <size in megabyte> ON AIF_USER_TS;  
ALTER USER <BD ATOMIC SCHEMA USER> QUOTA <size in megabyte> ON  
AIF_USER_TEMP_TS;
```

**Topics:**

- [Hardware and Software Requirements](#)
- [Setup Password Stores with Oracle Wallet](#)

### 3.1 Hardware and Software Requirements

The following hardware and software are required for this version of Compliance Studio. The installation environment or setup must have these requirements for an application to run smoothly and efficiently.

**Topics:**

- [System Configuration](#)
- [Port Numbers for Application](#)
- [Prerequisite Environmental Settings](#)
- [Download the Big Data Files](#)
- [Download the Elastic Search Rest High Client Dependency](#)
- [Validation Checklist](#)
- [Configure the Elastic Search Component](#)

- Configure Logstash
- Installing Analytics ICU Plugin
- Configure the Interpreter Settings
- Create the Hive Schema
- Create the Tablespace
- Create the Studio Schema
- Assign Grants for the Studio Schema
- Create the Sandbox Schema
- Assign Grants for the Sandbox Schema
- Graph Schema
- Entity Resolution

Table 6 lists the Hardware and Software Requirements:

**Table 6: Hardware and Software Requirements**

Hardware or Software Category	Component Version
Browser	Chrome
Java Version	Java 8 and 11
Processing Server	<ul style="list-style-type: none"> <li>• RHEL 7.6+ and 8+</li> <li>• Oracle JRE Standard Edition 1.8.x(with JCE)</li> </ul>
Database Server	<ul style="list-style-type: none"> <li>• Oracle Database Release 19c (19.3+)</li> <li>• Oracle Machine Learning for R (OML4R) (formerly ORE) 1.5.1 with Open source R or Oracle R Distribution 3.6.1</li> </ul> <p style="text-align: center;"><a href="#">Click here</a> to get the supported DB versions.</p>
PGX (Graph) Server	<ul style="list-style-type: none"> <li>• RHEL 7.4+</li> <li>• Minimum gcc library v4.8.2</li> </ul>
Elastic Search	7.10.2 version.

**Table 6: Hardware and Software Requirements**

Logstash	<p>7.10.2 version.</p> <p><b>NOTE:</b></p> <ul style="list-style-type: none"> <li>Logstash version should be the same as Elastic Search.</li> </ul> <p>For example, if the ES version is 7.10.2, the Logstash version should also be 7.10.2.</p>
Elastic Search Hadoop Jars	Elastic Search can be downloaded from <a href="#">Elastic Search</a> .
Oracle Instant Client	<p>instantclient-basic-linux.x64-19.8.0.0.0</p> <p><b>NOTE:</b> The version should be the same as the Database version, and this should be present in the processing server.</p>
<p><b>Big Data</b></p> <p><b>NOTE:</b> You can use either <b>Cloudera</b> or open-source <b>Apache</b> for a big data cluster.</p> <p>If you are using a Graph pipeline, skip this section. This is applicable only in the case of legacy Graph ETL, which requires a Big Data cluster.</p>	
Hadoop and Spark	<p><b>NOTE:</b> Kerberos authentication must be enabled for Big Data.</p> <ul style="list-style-type: none"> <li>Apache Hadoop Version 3.0.0</li> <li>Apache Hive Version 2.1.1</li> <li>Apache Spark Version 2.4.0</li> <li>Apache Sqoop Version 1.4.7</li> <li>The <b>.profile</b> file must be present with the SPARK_HOME and PYTHON_HOME parameters already set.</li> </ul> <p><b>NOTE:</b> The product is certified for Apache-Hadoop, and any vendor-specific Hadoop distributions have to confirm compliance with Apache-Hadoop standards, and if not, the vendor the customer chooses to work with for Hadoop should ensure compliance to Apache-Hadoop standards. Any issue raised on vendor-specific distributions will be fixed only if the issue is reproducible on Apache-Hadoop, Apache-Hive, and Apache-Spark.</p>
Hive Connectors	Hive JDBC Connectors V 2.5.15

**Table 6: Hardware and Software Requirements**

Apache	<ul style="list-style-type: none"> <li>• Kerberos 1.19.1</li> <li>• Hadoop Version 3.0.0</li> <li>• Hive Version 3.1.2</li> <li>• Spark Version 2.4.8 (with Hadoop)</li> <li>• Sqoop Version 1.4.7</li> </ul> <p><b>NOTE:</b></p> <ul style="list-style-type: none"> <li>• The <b>.profile</b> file must be present with the SPARK_HOME and PYTHON_HOME parameters already set.</li> <li>• Kerberos authentication must be enabled for the above services and ensure these services are Apache standards.</li> </ul>
Apache	<ul style="list-style-type: none"> <li>• The product is certified for Apache-Hadoop, and any vendor-specific Hadoop distributions must confirm compliance with Apache-Hadoop standards. If not, the vendor, the customer, who chooses to work with Hadoop should comply with the Apache-Hadoop standards. Any issue raised on vendor-specific distributions will be fixed only if the issue is reproducible on Apache-Hadoop, Apache-Hive, and Apache-Spark.</li> </ul>
Hadoop Security Protocol	<ul style="list-style-type: none"> <li>• Kerberos 5</li> <li>• Apache Sentry-2.1.0</li> </ul>

### 3.1.1 System Configuration

1. Log in to the server as a root user.
2. Navigate to UNIX file path `/etc/security/limits.conf` to edit the file.
3. Add the following values at the end of the file for Compliance Studio:

```
<Username> hard nproc 65536
```

```
<Username> soft nproc 65536
```

For example,

```
compliancestudio hard nproc 65536
```

```
compliancestudio soft nproc 65536
```

### 3.1.2 Port Numbers for Application

You can see default port numbers for services in the **install.sh** files in `<Compliance Studio Installation Path>/bin`. To change the port number for service(s) in **install.sh** and in respective service(s) directories, see [Appendix A - Change Port Numbers for the Applicable Services](#) section.

### 3.1.3 Prerequisite Environmental Settings

The following prerequisite environmental settings must be set before beginning the installation of Compliance Studio. These settings are the configuration that a system must have for an application to run smoothly and efficiently.

Table 7 lists the Prerequisite Environmental Settings:

**Table 7: Prerequisite Environmental Settings**

Category	Expected Value
Java Settings	<p><code>PATH</code> in the <code>.profile</code> file must be set to include the Java Runtime Environment (Java 8) absolute path.</p> <p><b>Supported version:</b> jdk 1.8.0 and 11.0.15</p> <p><b>NOTE:</b></p> <p>Ensure the absolute path to <code>JRE/bin</code> is set at the beginning of the <code>PATH</code> variable.</p> <p>For example: <code>PATH=/usr/java/jre1.8/bin:\$PATH</code></p> <p>Ensure no <code>SYMBOLIC</code> links to Java installation are set in the <code>PATH</code> variable.</p>
PGX Server	<p>The following packages must be installed or present in the server where the PGX service is installed:</p> <pre>krb5-libs krb5-workstation procps-ng nc</pre> <p>Execute the following command to install the packages as mentioned above:</p> <pre>yum install -y krb5-libs krb5-workstation procps-ng nc</pre> <p><b>NOTE:</b> If you are using a Graph pipeline, skip this configuration/kerberos packages. This is applicable only in the case of legacy Graph ETL, which requires a Big Data cluster.</p>
Oracle Database Settings	<p><b>Oracle Processing Server</b></p> <p><code>ORACLE_HOME</code> must be set in the <code>.profile</code> file pointing to the appropriate Oracle DB Client installation.</p> <p><code>PATH</code> in the <code>.profile</code> file must be set to include the appropriate <code>\$ORACLE_HOME/bin</code> directory.</p>
Download Directory	<p>Indicates the directory where the product installer zip file is downloaded or copied. The user permission must be set to 755 for this directory.</p>
Installation Directory	<p>Indicates the directory where the product installer zip file is extracted, and the installation files are placed. The user permission must be set to 755 for this directory.</p> <p><b>NOTE:</b></p> <p>The Installation and the Download Directory can be the same if the product installer zip file is not copied separately to another directory.</p>



**Table 7: Prerequisite Environmental Settings**

Category	Expected Value
OS Locale	Linux: en_US.utf8 Execute the following command to check the locale: <code>locale -a   grep -i 'en_US.utf'</code> The locale is displayed.
Oracle Instant client	Install oracle instant client in the server where compliance Studio is installed and provide the configuration <code>LD_LIBRARY_PATH</code> in <code>config.sh</code>

### 3.1.4 Download the Big Data Files

Download the following configuration files from the Big Data server or contact the Big Data Administrator:

**NOTE**

- These files must be kept ready and provided in the following file structure used during Compliance Studio installation.
- If you are using a Graph pipeline, skip this section. This is applicable only in the case of legacy Graph ETL, which requires a Big Data cluster.

Table 8 lists the required file structure:

**Table 8: Required File Structure**

File Category	File Names
Hadoop Cluster	<ul style="list-style-type: none"> <li>• core-site.xml</li> <li>• hive-env.sh</li> <li>• hive-site.xml</li> <li>• hadoop-env.sh</li> <li>• hdfs-site.xml</li> <li>• mapred-site.xml</li> <li>• yarn-site.xml</li> <li>• redaction-rules.json</li> <li>• log4j.properties</li> <li>• ssl-client.xml</li> <li>• topology.map</li> <li>• topology.py</li> </ul>
Kerberos Files	<ul style="list-style-type: none"> <li>• krb5.conf</li> <li>• keytab file name as mentioned in the <code>config.sh</code> file.</li> </ul>

**Table 8: Required File Structure**

Additional Jars	<ul style="list-style-type: none"> <li>• <code>hive-exec-*.jar</code>.</li> <li>• <code>HiveJDBC4.jar</code>.</li> <li>• <code>hive-metastore-*.jar</code>.</li> <li>• <code>hive-service-*.jar</code>.</li> </ul> <p><b>NOTE:</b></p> <ul style="list-style-type: none"> <li>• The version of the jars is client or user-specific. These jars can be obtained from the existing jars of the Cloudera installation.</li> <li>• The <code>HiveJDBC4.jar</code> file is not available in the Cloudera installation setup. You must download the same from the <a href="#">Cloudera</a> website. This is applicable only for Cloudera Cluster.</li> <li>• For additional jars, see the <a href="#">Appendix C – Additional Jars – PGX</a> and <a href="#">Appendix D – Additional Jars – Batch Service</a>.</li> </ul>
ES-Hadoop Jars	<p><code>elasticsearch-spark-20_2.11-7.10.2.jar</code></p> <p>To download the <code>elasticsearch-spark-20_2.11-7.10.2.jar</code> file, follow these steps:</p> <ol style="list-style-type: none"> <li>1. Download the ZIP file from <a href="#">Elasticsearch 7.10.2</a></li> <li>2. Extract the downloaded file.</li> <li>3. Navigate to the <code>dist</code> directory and download the <code>elasticsearch-spark-20_2.11-7.10.2.jar</code></li> </ol> <p><b>NOTE:</b> The version should be the same as the Elastic Search version.</p>

### 3.1.5 Download the Elastic Search Rest High Client Dependency

This section is required to use Graph and Entity Resolution functionality.

To download the elastic search rest high client dependency, follow these steps;

1. Collect the jar and its transitive dependency of `org.elasticsearch.client:elasticsearch-rest-high-level-client` in a folder from the maven central directory.

To download the required dependencies for elastic search version 7.10.2, see the [Appendix G - Jars for Elastic Search](#) section.

Or

If you are using gradle to download the jar files, see the [Download the Elastic Search Jars Using Gradle](#) section.

**NOTE**

- Later in the configuration, this folder path will be referred to **ES\_JARS\_LOCATION** parameter under the **Elastic Search Cluster details** in the `config.sh` file section.
- Remove the **Jackson** and **log4j** jars if you are not downloaded using the gradle script.

### 3.1.6 Validation Checklist

The Validation Checklist section provides you with the parameters that you can validate to avoid installation issues. This section explains the validation and actions that can be taken for some of the common parameters that are used in the `config.sh` file for the installation. The parameters that can be validated are as follows:

**NOTE** If you are using a Graph pipeline, skip Cloudera parameters. This is applicable only in the case of legacy Graph ETL, which requires a Big Data cluster.

Table 9 lists the required file structure:

**Table 9: Required File Structure**

Parameters	Validation
External Service (OFSAA_SERVICE URL)	The OFSAA_Service URL can be validated by clicking the URL for verification.
DB Details for Studio Schema	You can log in to SQL developer and verify the DB Details for Studio Schema.
Compliance Studio Schema Wallet Details	You can verify the Wallet details by reviewing the steps in <a href="#">Verify the Connectivity of the Wallet</a> .
Atomic Wallet Detail	You can verify the Wallet details by reviewing the steps in <a href="#">Setup Password Stores with Oracle Wallet</a> .
SQL Scripts	You can log in to Compliance Studio using SQL developer and validate the <b>Studio_DBLINK_BD</b> . If the link type is DBLINK, if Schema is not DBLINK, there is no validation required.
Cloudera	You can verify the Cloudera details and validate them by reviewing the steps in <a href="#">Create the Credential Keystore</a> .
Cloudera (SSH Connection)	Run the command <code>ssh &lt;hostname of the Cloudera machine&gt;</code> . You must run this command from the host where the Studio is installed.
Cloudera (Keytab)	Run the command <code>kinit -v &lt;KERBEROS_PRINCIPAL&gt; -k -t &lt;KEYTAB_FILEPATH&gt;</code> to verify the keytab.

### 3.1.7 Configure the Elastic Search Component

**NOTE** If the Elastic Search Component was configured in the previous version of Compliance Studio, then during the upgrade steps Elastic Search Component need not have to be done again. Make sure to re-utilize the required .jks files/username/passwords, etc from this section during the Compliance Studio upgrade.

To configure the Elastic Search component, follow these steps:

**NOTE**

- Ensure that a minimum of 4GB free RAM space is available for elastic search. If RAM is low, the shards of the elastic search fail, and the correct result is not fetched.
- You must manually clean the cache if facing a performance issue.
- As a prerequisite, download the `analysis-icu-<Elastic Search Version>.zip` from Elastic Search official website.

1. Navigate to the `<Elastic search installed path>/config` directory.
2. Configure the `elasticsearch.yml` with the following variables:

Table 10 lists the parameters of `elasticsearch.yml` file:

**Table 10: Elasticsearch.yml File**

Interaction Variable Name	Significance
cluster.name	Indicates the name of the cluster.
node.name	Indicates the name given for the node.
node.master	Indicates whether the node is a master.
node.data	Indicates the node data.
path.data	Indicates the directory where you want to store the data.
path.logs	Indicates the directory where you want to store the logs.
network.host	Indicates the hostname of the machine where you want to install the elastic search service.

**Table 10: Elasticsearch.yml File**

http.port	Indicates the port number where the elastic search service is installed.
discovery.seed_hosts	(Optional) Indicates the hostnames of the nodes of the cluster.
cluster.initial_master_nodes	(Optional) Indicates the number given to the nodes of the cluster.
indices.breaker.total.use_real_memory	<ul style="list-style-type: none"> <li>Indicates the static setting to determine whether the parent breaker must consider the real memory usage or only consider the amount reserved by the child circuit breakers.</li> <li>This setting is used to prevent the OutOfMemory error.</li> </ul>

3. Configure the `jvm.options` file as follows:

The following table lists Interaction variable names for Configure `jvm.options` File.

**Table 11: Configure `jvm.options` File**

Interaction Variable Name	Significance
-Xms1g	<ul style="list-style-type: none"> <li>Set the value for these parameters.</li> <li>The maximum value set can be up to 50% of the RAM size of the machine.</li> <li>Recommended value: Less than 32GB.</li> </ul>
-Xmx1g	

4. Enter the URL in the following format into the browser:

`http://<network.host>:<http.port>`

The following output is displayed to indicate the successful installation of the Elastic Search service.

```
{
  "name" : "node-1",
  "cluster_name" : "my-application",
  "cluster_uuid" : "<Cluster UUID>",
  "version" : {
    "number" : "7.13.4",
    "build_flavor" : "default",
    "build_type" : "tar",
    "build_hash" : "c5f60e894ca0c61cdbae4f5a686d9f08bcefc942",
    "build_date" : "2021-07-14T18:33:36.673943207Z",
```

```
    "build_snapshot" : false,  
    "lucene_version" : "8.8.2",  
    "minimum_wire_compatibility_version" : "6.8.0",  
    "minimum_index_compatibility_version" : "6.0.0-beta1"  
  },  
  "tagline" : "You Know, for Search"  
}
```

### 3.1.7.1 Enable or Disable HTTPS and Authentication for Elastic Search

To enable the HTTPS and Authentication, ensure the below codes lines are not commented (remove # symbol at the starting of line) in `elasticsearch.yml`.

To disable the HTTPS and Authentication, ensure the below codes lines are commented (add # symbol at the starting of line) in `elasticsearch.yml`.

#### 3.1.7.1.1 Enable HTTPS and Authentication

1. Navigate to <Elastic Search Installation Path>/config/elasticsearch.yml.
2. Verify the below code lines if anything commented on, if yes, remove it.

```
xpack.security.enabled: true  
xpack.security.http.ssl.enabled: true  
xpack.security.transport.ssl.enabled: true  
xpack.security.http.ssl.key: certs/node-1.key  
xpack.security.http.ssl.certificate: certs/node-1.crt  
xpack.security.http.ssl.certificate_authorities: certs/ca.crt  
xpack.security.transport.ssl.key: certs/node-1.key  
xpack.security.transport.ssl.certificate: certs/node-1.crt  
xpack.security.transport.ssl.certificate_authorities: certs/ca.crt
```

#### 3.1.7.1.2 Disable HTTPS and Authentication

1. Navigate to <Elastic Search Installation Path>/config/elasticsearch.yml.
2. Verify the below code lines and comment all as shown below:

```
#xpack.security.enabled: true  
#xpack.security.http.ssl.enabled: true  
#xpack.security.transport.ssl.enabled: true  
#xpack.security.http.ssl.key: certs/node-1.key  
#xpack.security.http.ssl.certificate: certs/node-1.crt  
#xpack.security.http.ssl.certificate_authorities: certs/ca.crt  
#xpack.security.transport.ssl.key: certs/node-1.key  
#xpack.security.transport.ssl.certificate: certs/node-1.crt
```

```
#xpack.security.transport.ssl.certificate_authorities: certs/ca.crt
```

### 3.1.7.1.3 Enable HTTPS and Disable Authentication

1. Navigate to <Elastic Search Installation Path>/config/elasticsearch.yml.
2. Verify the below code lines, and add comment (#) to the required code to disable authentication as shown below:

```
#xpack.security.enabled: true
xpack.security.http.ssl.enabled: true
#xpack.security.transport.ssl.enabled: true
xpack.security.http.ssl.key: certs/node-1.key
xpack.security.http.ssl.certificate: certs/node-1.crt
xpack.security.http.ssl.certificate_authorities: certs/ca.crt
#xpack.security.transport.ssl.key: certs/node-1.key
#xpack.security.transport.ssl.certificate: certs/node-1.crt
#xpack.security.transport.ssl.certificate_authorities: certs/ca.crt
```

### 3.1.7.1.4 Disable HTTPS and Enable Authentication

1. Navigate to <Elastic Search Installation Path>/config/elasticsearch.yml.
2. Verify the below code lines, and add comment (#) to the required code to disable HTTPS as shown below:

```
xpack.security.enabled: true
#xpack.security.http.ssl.enabled: true
xpack.security.transport.ssl.enabled: true
#xpack.security.http.ssl.key: certs/node-1.key
#xpack.security.http.ssl.certificate: certs/node-1.crt
#xpack.security.http.ssl.certificate_authorities: certs/ca.crt
xpack.security.transport.ssl.key: certs/node-1.key
xpack.security.transport.ssl.certificate: certs/node-1.crt
xpack.security.transport.ssl.certificate_authorities: certs/ca.crt
```

### 3.1.7.2 Cleanup of Elastic Search Indexes

To clean up the Elastic Search indexes, run the following command:

```
curl -XDELETE http://<FULLY QUALIFIED HOSTNAME>:<PORT of Load To Elastic Search Service>/load-to-elastic-search/idx/deleteIndex/<INDEX NAME>
```

For example,

```
curl -XDELETE http://testserver.in.oracle.com:7053/load-to-elastic-search/idx/deleteIndex/test_index
```

### 3.1.7.3 Generate truststore File for Elasticsearch

**NOTE** This section is applicable only when https and authentication are enabled.

To generate file for Elasticsearch, follow these steps:

1. Run the following `jks` command in the Studio Server:

```
keytool -import -alias elasticCA -file  
<path_to_elasticsearch_ca_cert_file> -keystore  
<path_to_save_elastic.jks_file>
```

For example,

```
keytool -import -alias elasticCA -file /scratch/elastic/Elasticsearch/  
elasticsearch/config/certs/ca/ca.crt -keystore /scratch/elastic/  
Elasticsearch/elastic.jks
```

2. Specify the keystore password.
3. Execute the following command in the studio server to generate the `.crt` certificate:

```
keytool -importcert -keystore <path_to_elastic.jks_file> -alias  
<alias_name> -file <path_to_node_cert>
```

For Example,

```
keytool -importcert -keystore /scratch/elastic/Elasticsearch/elastic.jks  
-alias myEsNode -file /scratch/elastic/Elasticsearch/elasticsearch/  
config/certs/node-1/node-1.crt
```

4. Specify the keystore password.
5. When generating the keytool ensure to provide the hostname in the first name. For example:

**Question:** What is your first and last name?

**Answer:** Provide the fully qualified studio server hostname.

For example, <hostname>.<domain name>

6. Specify any name for the other questions.
7. Specify the keystore password. The `jks` file is created in the Studio Server.

**NOTE** You must use the same password and alias that is provided in the `config.sh` file.

### 3.1.8 Configure Logstash

1. Download the Logstash tar file compatible with your Elastic Search version. For example, if the Elastic Search version is 7.10.2, the Logstash version should also be 7.10.2.

You can download logstash from the official [website](#):

2. Untar the tar file in one of the Server locations where you are installing Compliance Studio.
3. Provide this path as `Logstash_Home` in `config.sh` file.
4. Create a folder “Logstash” under CS install path.
5. Navigate to the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/Logstash`



6. Untar the contents of the tar file.
7. Provide this folder path for the parameter “Logstash\_Home” in `config.sh` file. The Compliance Studio installer will automatically configure the Logstash properties where necessary.

**NOTE** The `ca.crt` file should be copied from the elastic search server into the `Logstash_Home/config` path when `https` is enabled in elastic search.

### 3.1.9 Installing Analytics ICU Plugin

To install the Analytics ICU plugin, perform the following.

1. To Obtain the ICU plugin, follow these steps:

- Run the following command to download:

```
wget https://artifacts.elastic.co/downloads/elasticsearch-plugins/analysis-icu/analysis-icu-  
<version>.zip
```

Example:

```
wget https://artifacts.elastic.co/downloads/elasticsearch-plugins/analysis-icu/analysis-icu-  
7.9.2.zip
```

- You can also download the required version from the browser.

2. Navigate to `<Elastic Search Installation Path>`.

For example,

```
elasticsearch-<version>
```

3. Run the following command to install the plugins:

```
elasticsearch-<version>/bin/elasticsearch-plugin install file:///   
<ElasticSearch Installation Path>/analysis-icu-<version>.zip
```

Example:

```
elasticsearch-7.14/bin/elasticsearch-plugin install file:///   
<ElasticSearch Installation Path>/analysis-icu-7.14.zip
```

### 3.1.10 Configure the Interpreter Settings

Before installing Compliance Studio, you must configure the interpreter settings for the following interpreters.

**NOTE** Ensure to configure the settings only for the interpreters that you require.

Table 12 lists the Pre-installation Interpreter Settings:

**Table 12: Pre-installation Interpreter Settings**

Interpreter	Prerequisite Settings
jdbc	No additional configuration is required.
md	No additional configuration is required.
pgsql	No additional configuration is required.
pgx- algorithm	No additional configuration is required.
pgx-java	No additional configuration is required.
pgx-python	No additional configuration is required. You can point to any other python virtual environment.
pyspark	For the required configuration, see <a href="#">Configure the PySpark Interpreter</a> .
spark	For the required configuration, see <a href="#">Configure the Spark Interpreter</a> .
fcc-python	No additional configuration is required.
ore	The ore Interpreter has been deprecated. This interpreter is not recommended since it will be removed in future versions of OFS Compliance Studio. The “R” Interpreter will be introduced instead of <b>ore</b> Interpreter.

### 3.1.10.1 Configure the PGX Interpreter

- To update the bundled JDK, see the [How to update the bundled JDK version?](#) in the [Frequently Asked Questions in Compliance Studio](#).
- To use system’s JDK instead of bundled JDK, see the [How to use the system's JDK 11 instead of bundled JDK?](#) in the [Frequently Asked Questions in Compliance Studio](#).

## 3.1.10.2 Configure the Spark Interpreter

### 3.1.10.2.1 Prerequisites for using the Spark Interpreter

To configure Spark Interpreter, you must download the desired spark distribution from [Spark's official website](#).

For example, spark-2.4.0-bin-hadoop2.7.tgz from the [website](#).

[Configure the Spark Interpreter](#) can be used in several situations as follows:

- Connecting to remote spark cluster
  - With/without Kerberos
  - Custom Hadoop client configuration
  - Custom libraries
- Spark in local mode.

In case you want to connect to a remote spark cluster, then obtain the following files:

- Hadoop or Hive client configuration as per your use case
- Kerberos files (if applicable)
  - krb5.conf
  - keytab file

### 3.1.10.2.2 Setting up spark-interpreter

The spark interpreter requires spark distribution to start. If you do not intend to use a spark-interpreter, disable the interpreter by performing the following steps:

**NOTE** If you do not intend to use a spark interpreter, disable the interpreter. You can perform the following steps.

1. Navigate to `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/bin` directory.
2. Open the `config.sh` file and set `export SPARK_ENABLED=false`.

The default configuration of Spark is configured for yarn-client deployment mode with Kerberos enabled remote spark cluster. For local mode, skip this section and follow below.

### 3.1.10.2.3 Spark Interpreter with remote spark cluster

The Spark Interpreter with remote spark cluster can be performed for the following:

- Configuration with Kerberos enabled remote spark cluster:
  - **krb5.conf**
  - **\*.keytab** (For example, **fccstudio.keytab**)
- Configuration with Kerberos disabled remote spark cluster

### 3.1.10.2.3.1 Configuration with Kerberos enabled remote spark cluster

1. Move the obtained Kerberos files to `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/batchservice/user/conf` directory.

**NOTE**

- These are the same Kerberos files used for ETL.
- If `extralibs` directory does not exist in this path `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/mmg-home/mmgstudio/interpreter-server/spark-interpreter-<version>/extralibs`, then create it.

2. Place the `spark-<version>-bin-hadoop<version>` files to `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/mmg-home/mmg-studio/interpreter-server/spark-interpreter-<version>/extralibs` directory.

For example, `spark-2.4.0-bin-hadoop2.7`

3. Create a folder and name as “**conf**” in the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/mmg-home/mmg-studio/interpreter-server/spark-interpreter-<version>/extralibs` directory.
4. Place the Hadoop or Hive client configuration files to `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/mmg-home/mmg-studio/interpreter-server/spark-interpreter-<version>/extralibs/conf` directory.

**NOTE**

Do not remove the `spark-env.sh` file.

5. Create `spark-default.conf` and update the spark configurations accordingly. See the [Sample spark-default.conf Configuration File](#) section for more information.
6. Update `spark.yarn.dist.files` and `spark.executorEnv.PYTHONPATH`.

**NOTE**

The path must be the same as the path given for the downloaded spark distribution. For example: path for `spark-2.4.0-bin-hadoop2.7` spark distribution.

7. Update the `spark.driver.host`.
8. Update the `spark.yarn.keytab`.
9. Update the `spark.yarn.principal`.
10. If required, you can add an additional spark configuration.

### 3.1.10.2.3.2 Configuration with Kerberos disabled remote spark cluster:

1. Place the Hadoop or Hive client configuration files to `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/mmg-home/mmg-studio/interpreter-server/spark-interpreter-<version>/extralibs/conf` directory.

**NOTE**

Do not remove the `spark-env.sh` file.

2. Create `spark-default.conf` and update the spark configurations accordingly. See the [Sample spark-default.conf Configuration File](#) section for more information.

3. Update `spark.yarn.dist.files` and `spark.executorEnv.PYTHONPATH`.

**NOTE** The path must be the same as the path given for the downloaded spark distribution. For example: path for `spark-2.4.0-bin-hadoop2.7` spark distribution.

4. Update the `spark.driver.host`.
5. Navigate to `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/mmg-home/mmg-studio/interpreter-server/spark-interpreter-<version>/extralibs/conf` directory.
6. Open `spark-default.conf` file and update `spark.driver.defaultJavaOptions` by removing:  

```
"-Dsun.security.krb5.debug=false -  
Djavax.security.auth.useSubjectCredsOnly=false -  
Djava.security.krb5.conf=<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/  
batchservice/user/conf/krb5.conf"
```

#### 3.1.10.2.4 Spark Interpreter in local mode

1. Navigate to `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/mmg-home/mmg-studio/interpreter-server/spark-interpreter-<version>/extralibs/conf` directory.
2. Create `spark-default.conf` and update the spark configurations accordingly. See the [Sample spark-default.conf Configuration File](#) section for more information.
3. Open `spark-default.conf` file and update `spark.driver.defaultJavaOptions` by removing:  

```
"-Dsun.security.krb5.debug=false -  
Djavax.security.auth.useSubjectCredsOnly=false -  
Djava.security.krb5.conf=<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/  
batchservice/user/conf/krb5.conf"
```
4. Set `spark.master` as `local[*]` in interpreter configuration file.

#### 3.1.10.2.5 Configuration

The Spark interpreter configuration can be divided into the following categories:

- Configuration related to deployment  
These properties can be set either in the Spark libraries, for example, the `spark-defaults.conf` file, or through the system environment variable, **SPARK\_CONF**.  
For example, `SPARK_CONF="--conf spark.driver.memory=2g"`.

**NOTE** These properties cannot be changed when the Spark interpreter is running.

- Configuration related to Spark runtime control

These properties can be set from the Interpreters page of the Compliance Studio application UI. This includes properties such as a `spark.executor.memory`.

**NOTE** The properties related to the driver cannot be set during runtime and are considered deployment configurations. The properties related to the executors can be set during runtime. Hence, the latter option of runtime control configuration is preferred.

A list of possible properties is available in the [Spark Official Documentation](#). All the properties prefixed with the term "zeppelin" listed in the [Zeppelin Spark Configuration Document](#) can also be set from the Interpreters page of the Compliance Studio application UI.

### 3.1.10.3 Configure the PySpark Interpreter

Compliance Studio uses PySpark 2.4.0. Before you begin the configurations, check the prerequisites depending on your operation mode.

#### 3.1.10.3.1 Prerequisites

The PySpark interpreter has the same prerequisites as that as the Spark Interpreter. For more information, see [Configure the Spark Interpreter](#). Also, all Spark components must be configured to use the same Python version.


#### 3.1.10.3.2 Configuration

The PySpark interpreter can be configured through the Spark interpreter, with the only exception being the Python version used. By default, the Python version is set to 3 that can be changed either in the interpreter JSON files before the startup or from the **Interpreters** page of the Compliance Studio application UI during runtime by changing the following properties:

To change the value of the `spark.pyspark.python` property before installing the Compliance Studio, follow these steps:


1. Navigate to the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/mmg-home/mmg-studio/conf/interpreter-conf/spark.json` directory.
2. Update the value in `spark.pyspark.python` property of the `spark.json` file.

To change the value of the `spark.pyspark.python` property after installing the Compliance Studio, follow these steps:

1. Login to the Compliance Studio application.
2. Launch the **CS Production** Workspace.
3. Hover the mouse over the **Data Studio Options**  widget and Click **Interpreters**.

By default, the Interpreters page lists all the available interpreters on the LHS.

Figure 1: Spark Interpreter

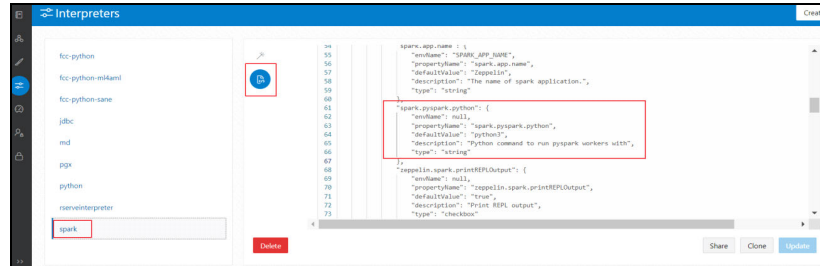

4. Click **spark** interpreter on the LHS and then click **Plain Configuration** on the RHS.
5. Update the value in the `spark.pyspark.python` property and click **Update**.

In the **Spark Interpreter Settings** page of the Compliance Studio application UI (or `spark.json` file), change the value of the `spark.pyspark.python` property to the Python executable path that is to be used by the Spark executors.

In the **PySpark Interpreter Settings** page of the Compliance Studio application UI (or `pyspark.json` file), change the value of the `zeppelin.pyspark.python` property to the Python executable path that is to be used by the Spark driver.

### 3.1.10.3.3 Use the Python Virtual Environments with PySpark

To ensure that the two Python versions match, in case your components run on different machines, you must use the Python virtual environments with PySpark.

To use Python Virtual Environments with PySpark, follow these steps:

1. [Create a Virtual Environment with Conda](#)
2. [Update the Interpreter Properties](#)

#### 3.1.10.3.3.1 Create a Virtual Environment with Conda

**NOTE** You can also use **virtualenv** to create your virtual environment instead of **conda**.

To create a virtual environment with Conda, follow these steps:

1. Ensure that you have conda and conda-Pack installed.
2. Create your virtual environment using the following command:

```
conda create -y -n <environment-name> python=<python-version>
<additional-packages>
```

**NOTE** The `<environment-name>` can be chosen freely and subsequently has to be substituted in further commands.

3. Activate your virtual environment using the following command:

```
conda activate <environment-name>
```

4. Execute the following to obtain the path to your virtual environment:

```
which python
```

The obtained result is referred to as `<environment-abs-path>`.

5. Compress your virtual environment using the following command:

```
conda pack -n <environment-name> -o <environment-abs-path>/<environment-name>.tar.gz
```

### 3.1.10.3.3.2 Update the Interpreter Properties

The interpreter properties can either be configured in the interpreter JSON files or from the Interpreters page of the Compliance Studio application UI after starting the Compliance Studio application.

- In the **Spark Interpreter Settings** page of the Compliance Studio application UI (or `spark.json`), change the following:
  - Change the value of the `spark.yarn.dist.archives` property to `<environment-abs-path>/<environment-name>.tar.gz#<environment-name>`
  - Change the value of the `spark.pyspark.python` property to `./<environment-name>/bin/python`
- In the **PySpark Interpreter Settings** page of the Compliance Studio application UI (or `pyspark.json`), change the value of the `zeppelin.pyspark.python` parameter to `<environment-abs-path>/bin/python`.

## 3.1.11 Create the Hive Schema

### NOTE

If you are using a Graph pipeline, skip this section. This is applicable only in the case of legacy Graph ETL, which requires a Big Data cluster.

To create a hive schema, perform the following steps:

1. Login to the server where **cloudera/hive** is installed.
2. Open a hive session in the command prompt.

```
hive
```

3. Create a new hive schema using the following script:

```
create database <hive schema name>;
```

4. Use the hive schema that is created by the following command:

```
Use <hive schema name>
```

A new hive schema is created.



### 3.1.12 Create the Tablespace

To create a tablespace in the Oracle Database using the script as described in the [Table 13](#).

**Table 13: Create Tablespace**

User	Script
AIF_USER_TEMP_TS	<pre>CREATE TABLESPACE AIF_USER_TEMP_TS   DATAFILE '&lt;Datafile Path&gt;'     SIZE &lt;size in byte&gt;   REUSE   AUTOEXTEND ON NEXT &lt;size in megabyte&gt; MAXSIZE UNLIMITED;</pre>
AIF_USER_TS	<pre>CREATE TABLESPACE AIF_USER_TS   DATAFILE '&lt;Datafile Path&gt;'     SIZE &lt;size in byte&gt;   REUSE   AUTOEXTEND ON NEXT &lt;size in megabyte&gt; MAXSIZE UNLIMITED;</pre>
<CS_USER_TS>	<pre>CREATE TABLESPACE &lt;CS_USER_TS&gt;   DATAFILE '&lt;Datafile Path&gt;'     SIZE &lt;size in byte&gt;   REUSE   AUTOEXTEND ON NEXT &lt;size in megabyte&gt; MAXSIZE UNLIMITED;</pre>

**NOTE** The tablespace size should be defined based on the size of the data.

### 3.1.13 Create the Studio Schema

To create a studio schema, create a new Oracle Database schema user using the following script:

```
CREATE USER <Compliance Studio Schema User Name> IDENTIFIED BY <Password>
  DEFAULT TABLESPACE <Studio Tablespace>;
ALTER USER <SCHEMA USER> QUOTA 2000M ON <STUDIO TABLESPACE>;
ALTER USER <SCHEMA USER> QUOTA <size in megabyte> ON AIF_USER_TS;
For example;
ALTER USER CS812_USER QUOTA 500M ON AIF_USER_TS;
```

**NOTE** The tablespace and quota sizes should be defined based on the size of the data.

A new Oracle Database schema (Studio schema) is created.

### 3.1.14 Assign Grants for the Studio Schema

Grant the following permissions to the newly created Oracle Database studio schema:

- GRANT CREATE SESSION TO <STUDIO SCHEMA USER>;
- GRANT CREATE TABLE TO <STUDIO SCHEMA USER>;

- GRANT CREATE VIEW TO <STUDIO SCHEMA USER>;
- GRANT CREATE ANY TRIGGER TO <STUDIO SCHEMA USER>;
- GRANT CREATE ANY PROCEDURE TO <STUDIO SCHEMA USER>;
- GRANT CREATE SEQUENCE TO <STUDIO SCHEMA USER>;
- GRANT EXECUTE ON DBMS\_RLS TO <STUDIO SCHEMA USER>;
- GRANT EXECUTE ON SYS.DBMS\_SESSION TO <STUDIO SCHEMA USER>;
- GRANT CREATE SEQUENCE TO <STUDIO SCHEMA USER>;
- GRANT CREATE SYNONYM TO <STUDIO SCHEMA USER>;
- GRANT EXECUTE ON DBMS\_REDEFINITION TO <STUDIO SCHEMA USER>;
- GRANT REDEFINE ANY TABLE TO <STUDIO SCHEMA USER>;
- GRANT CREATE MATERIALIZED VIEW TO <STUDIO SCHEMA USER>;
- GRANT SELECT ON SYS.V\_\$PARAMETER TO <STUDIO SCHEMA USER>;
- GRANT SELECT ON SYS.DBA\_FREE\_SPACE TO <STUDIO SCHEMA USER>;
- GRANT SELECT ON SYS.DBA\_TABLES TO <STUDIO SCHEMA USER>;
- GRANT SELECT ON SYS.DBA\_TAB\_COLUMNS TO <STUDIO SCHEMA USER>;
- GRANT CREATE RULE TO <STUDIO SCHEMA USER>;
- GRANT DROP ANY TRIGGER TO <STUDIO SCHEMA USER>;
- GRANT SELECT ON SYS.DBA\_RECYCLEBIN TO <STUDIO SCHEMA USER>;
- GRANT CREATE JOB TO <STUDIO SCHEMA USER>;
- GRANT EXECUTE ON DBMS\_LOCK TO <STUDIO SCHEMA USER>;
- GRANT EXECUTE ON DBMS\_STATS TO <STUDIO SCHEMA USER>;
- GRANT ANALYZE ANY TO <STUDIO SCHEMA USER>;
- GRANT CREATE TYPE TO <STUDIO SCHEMA USER>;
- GRANT EXECUTE ON CTXSYS.CTX\_DDL TO <STUDIO SCHEMA USER>;

### 3.1.15 Create the Sandbox Schema

To create a sandbox schema, create a new Oracle Database sandbox schema user using the following script:

```
create user <USER_NAME>
IDENTIFIED BY <password>
default tablespace AIF_USER_TS
temporary tablespace TEMP
profile DEFAULT
quota unlimited on AIF_USER_TS
```

```
quota <size in megabyte> on <USER_NAME>;
```

**NOTE**

- The sandbox will always be on a different database other than the production schema.
- The tablespace and quota sizes should be defined based on the size of the data.

A new Oracle Database schema (Sandbox schema) is created.

### 3.1.16 Assign Grants for the Sandbox Schema

Grant the following permissions to the newly created Oracle Database sandbox schema:

- GRANT CONNECT, RESOURCE, DBA TO <SANDBOX SCHEMA USER>;
- GRANT CREATE SESSION TO <SANDBOX SCHEMA USER>;
- GRANT CREATE PROCEDURE TO <SANDBOX SCHEMA USER>;
- GRANT CREATE SEQUENCE TO <SANDBOX SCHEMA USER>;
- GRANT CREATE TABLE TO <SANDBOX SCHEMA USER>;
- GRANT CREATE TRIGGER TO <SANDBOX SCHEMA USER>;
- GRANT CREATE VIEW TO <SANDBOX SCHEMA USER>;
- GRANT CREATE MATERIALIZED VIEW TO <SANDBOX SCHEMA USER>;
- GRANT SELECT ON SYS.V\_\$PARAMETER TO <SANDBOX SCHEMA USER>;
- GRANT CREATE SYNONYM TO <SANDBOX SCHEMA USER>;
- GRANT SELECT ON SYS.V\_\$PARAMETER TO <SANDBOX SCHEMA USER>;
- GRANT SELECT ON SYS.DBA\_FREE\_SPACE TO <SANDBOX SCHEMA USER>;
- GRANT SELECT ON SYS.DBA\_TABLES TO <SANDBOX SCHEMA USER>;
- GRANT SELECT ON SYS.DBA\_TAB\_COLUMNS TO <SANDBOX SCHEMA USER>;
- GRANT CREATE RULE TO <SANDBOX SCHEMA USER>;
- GRANT CREATE ANY TRIGGER TO <SANDBOX SCHEMA USER>;
- GRANT DROP ANY TRIGGER TO <SANDBOX SCHEMA USER>;

### 3.1.17 Graph Schema

#### 3.1.17.1 Create Graph Schema and Grant Permission

To create a Graph schema, create a new Oracle Database schema user using the following script:

```
CREATE USER <GRAPH SCHEMA USER NAME> IDENTIFIED BY <PASSWORD>;
```

A new Oracle Database schema (Graph schema) will be created.

To assign grants, run the following:

- Pre-installation grants for Graph Schema:
  - GRANT CREATE SESSION TO <GRAPH\_SCHEMA>;

- GRANT CREATE TABLE TO <GRAPH\_SCHEMA>;
- GRANT CREATE VIEW TO <GRAPH\_SCHEMA>;
- GRANT CREATE ANY PROCEDURE TO <GRAPH\_SCHEMA>;
- GRANT CREATE SEQUENCE TO <GRAPH\_SCHEMA>;
- GRANT CREATE JOB TO <GRAPH\_SCHEMA>;
- GRANT CREATE MATERIALIZED VIEW TO <GRAPH\_SCHEMA>;
- GRANT EXECUTE ON DBMS\_SCHEDULER TO <GRAPH\_SCHEMA>;
- GRANT EXECUTE ON DBMS\_COMPARISON TO <GRAPH\_SCHEMA>;
- GRANT EXECUTE ON DBMS\_RLS TO <GRAPH\_SCHEMA>;
- GRANT EXECUTE ON SYS.DBMS\_SESSION TO <GRAPH\_SCHEMA>;
- GRANT EXECUTE ON DBMS\_REDEFINITION TO <GRAPH\_SCHEMA>;
- GRANT REDEFINE ANY TABLE TO <GRAPH\_SCHEMA>;
- GRANT SELECT ON SYS.V\_\$PARAMETER TO <GRAPH\_SCHEMA>;
- GRANT EXECUTE ON <BD\_ATOMIC\_SCHEMA>.P\_FCC\_CS\_BD\_EXTERNAL\_ENTITY TO <GRAPH\_SCHEMA>;

Change the <BD\_ATOMIC\_SCHEMA> to the schema used in the Graph pipeline.

**NOTE**

The following grants are applicable for the Out-of-the-box graph pipeline only. If the user has to execute the custom graph, the same permissions have to be provided for the input tables referred in Custom Graph Pipeline.

- GRANT SELECT ON <BD\_ATOMIC\_SCHEMA>.ACCT TO <GRAPH\_SCHEMA>;
- GRANT SELECT ON <BD\_ATOMIC\_SCHEMA>.CUST\_ACCT TO <GRAPH\_SCHEMA>;
- GRANT SELECT ON <BD\_ATOMIC\_SCHEMA>.ACCT\_BAL\_POSN\_SMRY TO <GRAPH\_SCHEMA>;
- GRANT SELECT ON <BD\_ATOMIC\_SCHEMA>.CUST TO <GRAPH\_SCHEMA>;
- GRANT SELECT ON <BD\_ATOMIC\_SCHEMA>.BACK\_OFFICE\_TRXN TO <GRAPH\_SCHEMA>;
- GRANT SELECT ON <BD\_ATOMIC\_SCHEMA>.EMP TO <GRAPH\_SCHEMA>;
- GRANT SELECT ON <BD\_ATOMIC\_SCHEMA>.CUST\_CUST TO <GRAPH\_SCHEMA>;
- GRANT SELECT ON <BD\_ATOMIC\_SCHEMA>.KDD\_CAL TO <GRAPH\_SCHEMA>;
- GRANT SELECT ON <BD\_ATOMIC\_SCHEMA>.KDD\_REVIEW TO <GRAPH\_SCHEMA>;
- GRANT SELECT ON <BD\_ATOMIC\_SCHEMA>.EMP\_ACCT TO <GRAPH\_SCHEMA>;
- GRANT SELECT ON <BD\_ATOMIC\_SCHEMA>.ACCT\_SMRY\_MNTH TO <GRAPH\_SCHEMA>;
- GRANT SELECT ON <BD\_ATOMIC\_SCHEMA>.ACCT\_ADDR TO <GRAPH\_SCHEMA>;
- GRANT SELECT ON <BD\_ATOMIC\_SCHEMA>.EXTERNAL\_ENTITY TO <GRAPH\_SCHEMA>;
- GRANT SELECT ON <BD\_ATOMIC\_SCHEMA>.CUST\_EMAIL\_ADDR TO <GRAPH\_SCHEMA>;
- GRANT SELECT ON <BD\_ATOMIC\_SCHEMA>.CUST\_PHON TO <GRAPH\_SCHEMA>;
- GRANT SELECT ON <BD\_ATOMIC\_SCHEMA>.CUST\_ADDR TO <GRAPH\_SCHEMA>;

- GRANT SELECT ON <BD\_ATOMIC\_SCHEMA>.CASH\_TRXN TO <GRAPH\_SCHEMA>;
- GRANT SELECT ON <BD\_ATOMIC\_SCHEMA>.LINK\_STAGE TO <GRAPH\_SCHEMA>;
- GRANT SELECT ON <BD\_ATOMIC\_SCHEMA>.WIRE\_TRXN TO <GRAPH\_SCHEMA>;
- GRANT SELECT ON <BD\_ATOMIC\_SCHEMA>.MI\_TRXN TO <GRAPH\_SCHEMA>;
- GRANT SELECT ON <BD\_ATOMIC\_SCHEMA>.INSTN\_MASTER TO <GRAPH\_SCHEMA>;
- GRANT SELECT ON <BD\_ATOMIC\_SCHEMA>.EXTERNAL\_ENTITY\_ADDR TO <GRAPH\_SCHEMA>;
- GRANT SELECT ON <BD\_ATOMIC\_SCHEMA>.DERIVED\_ADDRESS TO <GRAPH\_SCHEMA>;
- GRANT SELECT ON <BD\_ATOMIC\_SCHEMA>.CLIENT\_BANK TO <GRAPH\_SCHEMA>;
- GRANT SELECT ON <BD\_ATOMIC\_SCHEMA>.EXTERNAL\_ENTITY\_LINK TO <GRAPH\_SCHEMA>;
- Post-installation grants for Graph Schema:
  - GRANT SELECT, INSERT, UPDATE ON <STUDIO\_SCHEMA>.FCC\_GRAPH\_M\_TRXN\_VIEWS TO <GRAPH\_SCHEMA>;
  - GRANT SELECT ON <STUDIO\_SCHEMA>.FCC\_M\_TABLES TO <GRAPH\_SCHEMA>;
  - GRANT SELECT ON <STUDIO\_SCHEMA>.FCC\_M\_COLUMNS TO <GRAPH\_SCHEMA>;
  - GRANT SELECT ON <STUDIO\_SCHEMA>.FCC\_M\_ATTRIBUTE TO <GRAPH\_SCHEMA>;
  - GRANT SELECT ON <STUDIO\_SCHEMA>.FCC\_M\_ATTRIBUTE\_COLUMN\_MAP TO <GRAPH\_SCHEMA>;
  - GRANT SELECT ON <STUDIO\_SCHEMA>.FCC\_M\_COLUMNS\_DETAILS TO <GRAPH\_SCHEMA>;
  - GRANT SELECT ON <STUDIO\_SCHEMA>.FCC\_M\_MAP TO <GRAPH\_SCHEMA>;

### 3.1.17.2 Create Wallet for Graph Schema

See **step 4** in the [Setup the Password Stores for Database User Accounts](#) section.

#### NOTE

- Graph schema must be in the same database where Compliance Studio Schema is exists.
- You can refer only one Graph schema in Compliance Studio.

### 3.1.17.3 Configure Resource XML

See the [Configure the resources.xml for Multiple ER Schemas](#) section for more details.

## 3.1.18 Entity Resolution

### 3.1.18.1 Create Entity Resolution Schema and Grant Permission

To create ER schema, create a new Oracle Database schema user using the following script:

```
CREATE USER <ER_SCHEMA_USERNAME> IDENTIFIED BY <PASSWORD>;
```

A new Oracle Database schema (ER schema) will be created.

To assign grants, see the [Assign Grants for the Studio Schema](#) section.

### 3.1.18.2 Create a wallet for ER schema

See **step 4** in the [Setup the Password Stores for Database User Accounts](#) section.

**NOTE**

- ER schema can be in the same database where CS is installed or a different database.
- You can create multiple ER schemas.

### 3.1.18.3 Configure Resource XML

See the [Configure the resources.xml for Multiple ER Schemas](#) section for more details.

### 3.1.18.4 Configure ER schema Profile

Set the SESSIONS\_PER\_USER limit to UNLIMITED for ER Schema by executing the below steps:

1. Get the ER schema profile by executing the below query:

```
select profile from dba_users where username = '<ER Schema User>';
```

2. Change the profile which is obtained from the step 1 by executing the below query:

```
ALTER PROFILE <profile> LIMIT SESSIONS_PER_USER UNLIMITED;
```

### 3.1.18.5 Post Upgrade Steps in case ER Batches are Executed before Upgrade

If ER batches are executed before upgrade, follow these steps:

1. Navigate to <COMPLIANCE\_STUDIO\_INSTALLATION\_PATH>OFS\_COMPLIANCE\_STUDIO/ficdb/upgrade/8.1.2.3.0/UpgradeFSDFSchema.

**NOTE**

The below steps are required only if Entity Resolution Jobs are executed before the 8.1.2.3.0 upgrade.

Perform the following steps to upgrade the ER/FSDF Schema:

2. Log in to Studio Schema.
3. Execute the script `Fetch_ER_Run_Details.sql`.

This script requires Pipeline ID as an input parameter. Provide the input in single quotes.

For example, 'CSA\_812' (including single quotes).

On execution, the script will print the following information as output:

- a. **PREVIOUS\_RUN\_SKEY**
- b. **PREVIOUS\_FIC\_MIS\_DATE**
- c. **OUTPUT\_TABLE\_NAME**

**NOTE**

These parameter values are required for the following steps.

4. Log in to ER/FSDF Schema.
5. Execute the script `LocalizedH$IndexCreation.sql`.  
This script will localize the existing indexes on history tables(H\$).
6. Execute the script `UpdateHistoryTables.sql`.

7. Enter the parameter values for **PREV\_RUN\_SKEY** and **PREV\_FIC\_MIS\_DATE** as obtained from step 3.
8. Execute the script `UpdateOutputTable`.
9. Enter the parameter value for **OUTPUT\_TABLE\_NAME** as obtained from step 3.  
For example, 'FCC\_ER\_OUTPUT' (including single quotes).

## 3.2 Setup Password Stores with Oracle Wallet

As part of an application installation, administrators must set up password stores for database user accounts using Oracle Wallet. These password stores must be installed on the application database side. The installer handles much of this process. The administrators must perform some additional steps.

A password store for the application and application server user accounts must also be installed; however, the installer takes care of this entire process.

### Topics:

- [Setup the Password Stores for Database User Accounts](#)
- [Verify the Connectivity of the Wallet](#)
- [Create the Credential Keystore](#)
- [Download the Installer Kit](#)

### 3.2.1 Setup the Password Stores for Database User Accounts

After the database is installed and the default database user accounts are set up, administrators must set up a password store using the Oracle Wallet. This involves assigning an alias for the username and associated password for each database user account. The alias is used later during the application installation. This password store must be created on the system where the application server and database client are installed.

This section describes the steps to create a wallet and the aliases for the database user accounts. For more information on configuring authentication and password stores, see [Oracle Database Security Guide](#).

**NOTE** In this section, `<wallet_location>` is a placeholder text for illustration purpose. Before running the command, ensure that you have already created the `<wallet_location>` directory where you want to create and store the wallet.

To create a wallet, follow these steps:

1. Log in to the server as a Linux user.
2. Create a wallet in the `<wallet_location>` using the following command:

```
mkstore -wrl <wallet_location> -create
```

**NOTE** The `mkstore` utility is included in the Oracle Database Client installation.

3. After you run the command, a prompt appears. Enter a password for the Oracle Wallet in the prompt.

Figure 2: Wallet Creation

```

-bash-4.1$ mkstore -wrl   
Oracle Secret Store Tool : Version 12.1.0.2  
Copyright (c) 2004, 2014, Oracle and/or its affiliates. All rights reserved.  
  
Enter password:  
Enter password again:  
-bash-4.1$ mkstore -wrl   
Oracle Secret Store Tool : Version 12.1.0.2  
Copyright (c) 2004, 2014, Oracle and/or its affiliates. All rights reserved.  
  
Your secret/Password is missing in the command line  
Enter your secret/Password:  
Re-enter your secret/Password:  
Enter wallet password:  
Create credential oracle.security.client.connect_string1  
-bash-4.1$ mkstore -wrl   
Oracle Secret Store Tool : Version 12.1.0.2  
Copyright (c) 2004, 2014, Oracle and/or its affiliates. All rights reserved.  
  
Your secret/Password is missing in the command line  
Enter your secret/Password:  
Re-enter your secret/Password:  
Enter wallet password:  
Create credential oracle.security.client.connect_string2  
-bash-4.1$ mkstore -wrl   
Oracle Secret Store Tool : Version 12.1.0.2  
Copyright (c) 2004, 2014, Oracle and/or its affiliates. All rights reserved.  
  
Your secret/Password is missing in the command line  
Enter your secret/Password:  
Re-enter your secret/Password:  
Enter wallet password:

```

4. Create the database connection credentials for the studio schema/ER Schema alias using the following command:

```
mkstore -wrl <wallet_location> -createCredential <alias-name> <database-user-name>
```

After you run the command, a prompt appears. Enter the password associated with the database user account in the prompt. You are prompted to re-enter the password. You are prompted for the wallet password used in Step 1.

5. Create the database connection credentials for the atomic schema alias using the following command:

```
mkstore -wrl <wallet_location> -createCredential <alias-name> <database-user-name>
```

**NOTE** Creating an atomic schema is not required when installing Compliance Studio without OFSAA.

In this manner, create a wallet and associated database connection credentials for all the database user accounts.

The wallet is created in the <wallet\_location> directory with the auto-login feature enabled. This feature enables the database client to access the wallet contents without using the password. For more information, see [Oracle Database Security Guide](#).


After the wallet is created, go to the <wallet\_location> directory and click **Refresh**  to view the created wallet folder.

Figure 3: Location of the Created Wallet Folder

Name	Size	Changed	Rights	Owner
wallet_808_		12-08-2020 14:52:49	rwx-----	

The wallet folder contains two files: **ewallet.p12** and **cwallet.sso**.



- In the <wallet\_location> directory, configure the **tnsnames.ora** file to include the entry for each alias name to be set up.

**Figure 4: Location of the Created Wallet Folder**

```

Studio_808 ██████████ =
  (DESCRIPTION =
    (ADDRESS_LIST =
      (ADDRESS = (PROTOCOL = TCP) (HOST = ██████████) (PORT = 1521))
    )
    (CONNECT_DATA =
      (SERVICE_NAME = ██████████)
    )
  )
)
)

aif ██████████ =
  (DESCRIPTION =
    (ADDRESS_LIST =
      (ADDRESS = (PROTOCOL = TCP) (HOST = ██████████) (PORT = 1521))
    )
    (CONNECT_DATA =
      (SERVICE_NAME = ██████████)
    )
  )
)

aif ██████████ =
  (DESCRIPTION =
    (ADDRESS_LIST =
      (ADDRESS = (PROTOCOL = TCP) (HOST = ██████████) (PORT = 1521))
    )
    (CONNECT_DATA =
      (SERVICE_NAME = ██████████)
    )
  )
)

```

**NOTE**

- You can either update the existing tnsnames.ora file with the above details or create new tnsnames.ora file and add the required entries.
- <alias-name> is a user-defined value.

- Create a **sqlnet.ora** file in the wallet directory using the following content:

```

WALLET_LOCATION = (SOURCE = (METHOD = FILE) (METHOD_DATA = (DIRECTORY =
<Wallet_Location>)) )

SQLNET.WALLET_OVERRIDE=TRUE

SSL_CLIENT_AUTHENTICATION=FALSE

```

### 3.2.2 Verify the Connectivity of the Wallet

To verify the connectivity of the wallet, follow these steps:

- Create a sqlnet.ora file in the wallet directory using the following content:

```

WALLET_LOCATION = (SOURCE = (METHOD = FILE) (METHOD_DATA = (DIRECTORY =
<Wallet_Location>)) )

SQLNET.WALLET_OVERRIDE=TRUE

SSL_CLIENT_AUTHENTICATION=FALSE

```

- Test the connectivity using the following command:

**NOTE**

The ORACLE\_HOME used with the wallet must be the same version or higher than the wallet created.

```
$ export WALLET_LOCATION=<wallet_location>
```

```
$ export TNS_ADMIN=<tnsnames.ora_location>. If you have created a new  
tnsnames.ora file, provide the location of the new file.
```

```
$ sqlplus /@<alias_name>
```

The output is similar to:

```
SQL*Plus: Release 11
```

```
Connected to:
```

```
Oracle Database 12c
```

```
To verify if you are connected to the correct user:
```

```
SQL> show user
```

The output is similar to:

```
USER is "<database-user-name>"
```

### 3.2.3 Create the Credential Keystore

**NOTE** If you are using a Graph pipeline, skip this section. This is applicable only in the case of legacy Graph ETL, which requires a Big Data cluster.

Credential keystore must be created for the Behavior Detection (BD) or Enterprise Case Management (ECM) **Atomic schema** and **Compliance Studio Schema**. To create a credential keystore, follow these steps:

1. Login as HDFS Superuser.
2. Create a credential keystore on HDFS using the following command:

```
hadoop credential create mydb.password.alias -provider jceks://hdfs/  
user/root/oracle.password.jceks
```

3. Verify the credential keystore file using the following command:

```
hadoop credential list -provider jceks://hdfs/user/root/  
oracle.password.jceks
```

4. Grant Read permission to the keystore file using the following command:

```
hadoop fs -chmod 744 /user/root/oracle.password.jceks
```

**NOTE** Ensure the credential keystore file path and the alias are correctly mentioned in the `config.sh` file.

#### 3.2.3.1 Copying and Adding Files

**NOTE** If you are using a Graph pipeline, skip this section. This is applicable only in the case of legacy Graph ETL, which requires a Big Data cluster.

To copy the jar files, follow these steps:

1. Create the folder in the `GRAPH_FILES_PATH` parameter in a node of the big data cluster.
2. Create a folder called `jars` inside the folder that is created in the previous step.

3. Navigate to the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/ficdb/etlJars` directory and copy all the jars in this directory into the big data node inside the folder jars.
4. Perform this step if https is enabled for Elastic Search:
  - a. Create a new folder with the name as **conf** in the **GRAPH\_FILES\_PATH** parameter in a node of the big data cluster.
  - b. Place the **es\_truststore.jks** file in the **conf** folder.

**NOTE** To use the ES-Hadoop connector, download the `commons-httpclient-3.0.1.jar` and `elasticsearch-spark-20_2.11-7.14.jar` (depending on which Elastic version is used) files and place them in the jars folder.

This is applicable only in the case of ETL for Graph.

### 3.2.3.2 Create Credential Keystore for Elastic Search

Credential keystore must be created for the Elastic Search if https is enabled for Elastic Search.

**NOTE** If you are using a Graph pipeline, skip this section. This is applicable only in the case of legacy Graph ETL, which requires a Big Data cluster.

To create a credential keystore, follow these steps:

1. Login as HDFS Superuser.
2. Create a credential keystore on HDFS using the following command:

```
hadoop credential create elastic.password.alias -value <Elastic search password> \  
-provider jceks://hdfs/user/fccstudio/elastic/elastic.password.jceks  
hadoop credential create elastic.keystore.password.alias -value password \  
-provider jceks://hdfs/user/fccstudio/elastic/elastic.password.jceks
```

Where,

- `elastic.password.alias` is the elastic search password alias name
  - `elastic.keystore.password.alias` is the elastic search keystore password alias name
  - `<Elastic search password>` is elastic search password
  - `password` is elastic search keystore password
  - `hdfs/user/fccstudio/elastic/elastic.password.jceks` is the file path of the credential keystore
3. Verify the credential keystore file using the following command:

```
hadoop credential list -provider jceks://hdfs/user/fccstudio/elastic/  
elastic.password.jceks
```
  4. Grant Read permission to the keystore file using the following command:

```
hadoop fs -chmod 744 /user/fccstudio/elastic/elastic.password.jceks
```

**NOTE**

- Ensure the credential keystore file path and the alias are correctly mentioned in the `config.sh` file.
- The version of the elastic search jar should be the same as the version of Elastic Search installed.

## 3.2.4 Download the Installer Kit

To download the software as a .zip folder, download the latest installer **34976411**, for the **v8.1.2.3.0** release from [My Oracle Support \(MOS\)](#).

### 3.2.4.1 Upgrade Scenario

To download the software as a .zip folder, download the latest installer **34976411**, for the **v8.1.2.3.0** release from [My Oracle Support \(MOS\)](#) and place the downloaded installer where the earlier version of CS/FCC studio is installed.

**NOTE**

Ensure that the installer's location differs from the installation path of an earlier CS/FCC studio version.

## 4 Installation

Perform the following steps to complete the installation:

- Extract the Installer Kit
- Place Files in the Installation Directories
- Add Synonyms and Stopword files in Elastic Search
- Place Files in Wallet
- Generate an Encrypted Password
- Generate the Public and Private Keys
- Generate API token for CS API User
- Generate Compliance Studio Server SSL Configuration Mandatory File
- Place the Key Store File for Secure Batch Service
- Add the Studio Service (SSL) to PGX Configuration
- Configure the Extract Transfer and Load (ETL) Process
- Apply Fine-Grained access control and Redaction Changes for Compliance Studio
- Configure the config.sh File
- Configure the resources.xml for Multiple ER Schemas
- Configure the resources.xml for Graph Schema
- Run the Compliance Studio Installer
- Generate the Graph-keystore.p12 File
- Configure the PGX Service
- Run ER in different workspaces

### 4.1 Extract the Installer Kit

After downloading the .zip folder, follow these steps to extract the folder contents:

1. Extract the contents of the installer archive file in the download directory using the following command:

```
unzip -a <Compliance_Studio_Installer_Archive_File>.zip
```

The Compliance Studio installer file is extracted, and the `OFS_COMPLIANCE_STUDIO` directory is obtained and is referred to as `<COMPLIANCE_STUDIO_INSTALLATION_PATH>`.

**WARNING** Do not rename the application installer directory name after extraction from the archive.

2. Navigate to the download directory where the installer archive is extracted, and assign execute permission to the installer directory using the following command:

```
chmod -R 0755 OFS_COMPLIANCE_STUDIO
```

## 4.2 Place Files in the Installation Directories

- |             |  |
|-------------|--|
| <b>NOTE</b> | <ul style="list-style-type: none"> <li>• If you are using a Graph pipeline, skip <b>steps 1</b> and <b>2</b>. This is applicable only in the case of legacy Graph ETL, which requires a Big Data cluster.</li> </ul> |
|-------------|--|

To place the required jars and Kerberos files in the required locations, follow these steps:

1. To place the additional jar files, follow these steps:
  - a. Navigate to the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/batchservice/user/lib` directory.
  - b. Place the following additional jar files:
    - `hive-exec-*.jar`. For example, `hive-exec-1.1.0.jar`.
    - `HiveJDBC4.jar`
    - `hive-metastore-*.jar`. For example, `hive-metastore-1.1.0.jar`.
    - `hive-service-*.jar`. For example, `hive-service-1.1.0.jar`.

For additional jars, see the [Appendix C – Additional Jars – PGX](#) and [Appendix D – Additional Jars – Batch Service](#) sections.

- |             |  |
|-------------|--|
| <b>NOTE</b> | <ul style="list-style-type: none"> <li>• The version of the jars is client or user-specific. These jars can be obtained from the existing jars of the Cloudera installation.</li> <li>• The <code>HiveJDBC4.jar</code> file is not available in the Cloudera setup. You must download the same from the <a href="#">Cloudera</a> website.</li> <li>• <b>For upgrade scenario:</b> The libraries available in the previous version of Compliance Studio can be copied and placed in the new location. To place the libraries, follow step 1.</li> </ul> |
|-------------|--|

2. To place the Kerberos files, follow these steps:
  - a. Navigate to the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/batchservice/user/conf` directory.
  - b. Place the following Kerberos files:
    - `krb5.conf`
    - keytab file name as mentioned in the `config.sh` file.

- |             |   |
|-------------|---|
| <b>NOTE</b> | <p><b>For upgrade scenario:</b> The files available in the previous version of Compliance Studio can be copied and placed in the new location. To place the files, follow step 2.</p> |
|-------------|---|

3. Perform this step if https is enabled for Elastic Search:
  - a. Copy `es_truststore.jks` file from `<Elastic_Search_Installation_Path>`.

- b. Place the `es_truststore.jks` file in `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/matching-service/conf` directory.

**NOTE**

- Generate the `es_truststore.jks` file in the `<Elastic_Search_Installation_Path>` before performing this step. This file contains Keystore certificates.
- **For upgrade scenario:** The `es_truststore.jks` file can be re-utilized from the previous version of Compliance Studio. To place the file, follow step 3.

## 4.3 Add Synonyms and Stopword files in Elastic Search

**NOTE**

**For upgrade scenario:** The Synonyms and Stopword files can be re-utilized from the previous Compliance Studio version.

To consider the similarity when performing the elastic search, you can add the synonyms and stopword files in the Elastic search.

To add synonyms and stopword files in Elastic search, perform the following steps:

1. Create a folder in the name of “analysis” in the `<Elastic Search Installation path>/config` directory.
2. You can add your synonyms and stopwords to these files and place the files in the analysis folder:
  - `Country.txt`
  - `Gender.txt`
  - `Organisation_strip.txt`
  - `Organisation_suffix.txt`
  - `Name_synonym.txt`
  - `Title.txt`
  - `Namestop.txt`
  - `Cardinal_ordinal.txt`
  - `Organisational_level2.txt`
  - `Organisational_stopwords.txt`
  - `Oraganisational_businesswords.txt`

**NOTE**

- User can decide to provide any data in the Stopword or Synonym files.
- Each Stopword must be provided in a separate line.
- All related synonyms must be provided in the same line, separated by a comma.
- All the synonyms must be provided in the same line and ensure that there are no repetitions of the synonym. For Example, `rob, robi, robie, roby, robbi`.

## 4.4 Place Files in Wallet

To place the files in the wallet in the required locations, follow these steps:

1. To place the files in the wallet, follow these steps:
  - a. Navigate to `<COMPLIANCE_STUDIO_INSTALLATION_PATH>`.
  - b. Create a folder 'wallet' and place the following files.
  - c. Navigate to `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/wallet`.
  - d. Place the following files, which are being generated from the `<wallet_directory>` in the section [Setup the Password Stores for Database User Accounts](#):
    - `tnsnames.ora`
    - `ewallet.p12`
    - `cwallet.sso`
    - `ewallet.p12.lck`
    - `cwallet.sso.lck`

**NOTE** This folder path will be referred to as "WALLET\_LOCATION" and "TNS\_ADMIN\_PATH" in `config.sh` while configuring Compliance Studio. If you want to maintain `tnsnames.ora` in a different folder, then "TNS\_ADMIN\_PATH" will be that folder location.

2. Place the `sqlnet.ora` file into the wallet and update the path for the current wallet location.

```
WALLET_LOCATION =
    (SOURCE =
        (METHOD = FILE)
        (METHOD_DATA =
            (DIRECTORY = <wallet location>)
        )
    )
SQLNET.WALLET_OVERRIDE = TRUE
```

## 4.5 Generate an Encrypted Password

To generate encrypted passwords required during configuration, i.e., while configuring encrypted passwords, for example. `STUDIO_DB_ENCRYPTED_PASSWORD`, follow the below steps.

1. Set the export `FIC_DB_HOME` path in the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/ficdb` directory.
2. Run the `echo $FIC_DB_HOME` command.
3. Go to the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/ficdb/bin` directory and run the `./FCCM_Studio_Base64Encoder.sh <password to be encrypted>` command.



## 4.6 Generate the Public and Private Keys

**NOTE** For **upgrade scenario**: The public and private keys can be re-utilized from the previous version of Compliance Studio. If you are upgrading from 8.0.8.\* to CS 8.1.2.3.0, then public and private keys have to be generated newly by performing the steps mentioned in the section.

The Public and Private keys are JSON Web Tokens (JWT) that are generated for Authentication from Compliance Studio.

To generate the keys, follow these steps:

**NOTE** The following steps are mandatory for the first-time Compliance Studio installation.

1. Navigate to the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/mmg-home/bin` directory.
2. Run the Shell Script `./key-generator.sh` from the directory.

The Public and Private Keys are generated and available in the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/mmg-home/conf` directory.

3. Copy the `private.key` and `public.key` files to the following paths:
  - `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/mmg-home/mmg-studio/conf` directory.
  - `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/batchservice/conf` directory.
  - `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/pgx/server/conf` directory.
  - `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/graph-service/conf` directory.

## 4.7 Generate API token for CS API User

**NOTE** For **upgrade scenario**: The API token can be re-utilized from the previous version of Compliance Studio. If you are upgrading from 8.0.8.\* to CS 8.1.2.3.0, then API token has to be generated newly by performing the steps mentioned in the section.

To generate the API token, follow these steps:

1. Navigate to the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/mmg-home/bin` directory.
2. Run the shell script: `./token-generator.sh CS_API_USER`

This will generate the API token in the same directory as `token.out`.

The generated token that is required while configuring `config.sh` file in the path `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/bin`.

## 4.8 Generate Compliance Studio Server SSL Configuration Mandatory File

### Topics:

- [Generate Self-signed Certificate](#)
- [Generate Signed Certificate](#)

### 4.8.1 Generate Self-signed Certificate

To generate the self-signed certificate, perform the following steps:

1. Run the following jks command in the Studio Server:

```
keytool -genkey -alias <alias> -keyalg RSA -keystore <alias>.jks
```

**NOTE** You must use the same password and alias that is provided in the `config.sh` file.

2. Specify the keystore password.
3. When generating the keytool ensure to provide the hostname in the first name. For example:

**Question:** What is your first and last name?

**Answer:** Provide the fully qualified studio server hostname.

For example, <hostname>.<domain name>

4. Specify any name for the other questions.
5. Specify the keystore password. The `jks` file is created in the Studio Server.

**NOTE** You must use the same password and alias that is provided in the `config.sh` file.

6. Run the following jks command in the Studio Server to generate the `.p12` file using the `.jks` file.;

```
keytool -importkeystore -srckeystore <alias>.jks -destkeystore <alias_name>.p12 -srcalias <alias> -srcstoretype jks -deststoretype pkcs12
```

7. Specify the keystore password. The `.p12` file is created in the Studio Server.
8. Copy the `.p12` files and place in the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/mmg-home/mmg-studio/conf` directory.

### 4.8.2 Generate Signed Certificate

To generate the signed certificate, perform the following steps:

1. Log in to the server as a Linux user.
2. Generate the CSR file that describes the certificate requested and needed by the signing authority.
3. Openssl default configuration does not include subject alternative names by default.

4. SANs should be updated in `cert.conf` file. Additional SANs or IPs can be added through properties such as DNS.2, DNS.3, IP.1, and IP.2 in the `[alt_names]` section.
5. Once the configuration file is placed, generate the CSR file and associated private key by running the following command:

```
openssl req -new -newkey rsa:2048 -nodes -keyout server.key -out server.csr -config cert.conf
```

6. Provide the requested entries, and some entries can be left blank.

---

**NOTE**

- You can check the CSR contains SANs by running the following command:

```
openssl req -text -noout -verify -in server.csr
```

- This step is optional only.

7. Request certificate from the signing authority. Once the certificate is received, convert the `server.cer` into PEM format if required by running the following command:

```
openssl x509 -in server.cer -out server.pem -outform PEM
```

---

**NOTE**

- You can check the contents of the certificate to make sure that the SANs are included by running the following command:

```
openssl x509 -in server.pem -text
```

- This step is optional only.

8. Create `.p12` keystore.

---

**NOTE**

- The `-name` parameter must match the value of the **STUDIO\_SERVER\_SSL\_ALIAS** variable from the path `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/bin/config.sh`
- To store the password, run the following command:  

```
openssl pkcs12 -export -out studio_server.p12 -inkey server.key -in server.pem -name studio_alias
```
- The password must match the value of the **STUDIO\_SERVER\_SSL\_PASSWORD** variable from `<COMPLIANCE_STUDIO_INSTALLATION_PATH >/bin/config.sh`
- To check the keystore, run the following command:  

```
openssl pkcs12 -export -out studio_server.p12 -inkey server.key -in server.pem -name studio_alias
```
- This step is optional only.

9. Copy the `cp studio_server.p12` file and place in the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/mmg-home/mmg-studio/conf/`

studio\_server.p12 and `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/mmg-home/mmg-studio/conf/studio_server.p12` directories.

10. Restart Compliance Studio. To do this, navigate to the

`<COMPLIANCE_STUDIO_INSTALLATION_PATH>/bin` directory and run the `./compliance-studio.sh restart`

## 4.9 Place the Key Store File for Secure Batch Service

**NOTE** For upgrade scenario: The files can be re-utilized from the previous version of Compliance Studio. If you are upgrading from 8.0.8.\* to CS 8.1.2.3.0, then .jks and .p12 files have to be generated newly by performing the steps mentioned in the section.

Place the .jks and .p12 files generated from the [Generate Compliance Studio Server SSL Configuration Mandatory File](#) section and place them in the following path (batch service): `<Compliance Studio Installation Path>/OFS_COMPLIANCE_STUDIO/batchservice/conf` directory.

## 4.10 Add the Studio Service (SSL) to PGX Configuration

Adding the Studio Service (SSL) to PGX Trust Store facilitates you to apply redaction on the graph batch service and connect with PGX.

To add the Studio Service to PGX Trust Store, copy the .p12 file from `<Compliance Studio Installation path>/mmg-studio/conf` directory to the `<PGX Server path>/server/conf` directory.

After generating the .p12 file and adding the Studio service to the PGX trust store.

## 4.11 Configure the Extract Transfer and Load (ETL) Process

**NOTE** If you are using a Graph pipeline, skip this section. This is applicable only in the case of legacy Graph ETL, which requires a Big Data cluster.

Extract Transfer and Load (ETL) is the procedure of copying data from one or more sources into a destination system that represents the data differently from the source or in a different context. Data movement and graph loading is performed using ETL.

To configure the Data Movement and Graph Load, copy the applicable `FCCM_Studio_SqoopJob.sh` files from the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/ficdb/bin` directory and add in the `<FIC_HOME of OFSAA_Installed_Path>/ficdb/bin` directory.

For more information, see the [Configure ETL](#) and [Execute ETL](#) sections in the [OFS Compliance Studio Administration and Configuration Guide](#).

**NOTE** Before running the sqoop job, ensure that the correct values are the `server-config.properties` file from the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/batchservice/conf` directory.

**Topics:**

- [Loading Graphs](#)

## 4.11.1 Loading Graphs

Loading graphs to Compliance Studio can be based on the following scenarios:

### 4.11.1.1 Loading sample graph without running ETL

To load the sample graph without running ETL, perform the following steps:

1. Navigate to the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/sample-graph` folder.
2. Unzip the contents of the `sample-graph-8.*.zip` file in the same folder.
3. Copy the entire path of the folder `sample-graph`.
4. Open the `sample-graph-8.*.json` file and paste the copied `<sample-graph folder path>` into the placeholder `<SERVER_PATH>` under the parameter `"uris"`.

**NOTE** Ensure to replace all the placeholders with the copied path of the folder `sample-graph`.

5. Navigate to the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/pgx/server/conf` directory and modify the `pgx.conf` file for the highlighted parameters:

```
"preload_graphs": [
  {
    "path": "<sample-graph folder path>/sample-graph.json",
    "name": "GlobalGraphIH",
    "publish": false,
    "publish_with_snapshots": true
  }
],
"pgx_realm": {
  "implementation": "com.oracle.ofss.fccm.studio.pgx.FCCMPgxRealm"
},
"file_locations": [
  {
    "name": "hdfs_storage",
    "location": "<sample-graph folder path>"
  }
]
```

6. Restart the PGX server.

### 4.11.1.2 Loading the graph generated from ETL

You can load a graph generated from ETL based on the following:

PGX fails until you have a graph generated from ETL on the HDFS. Once the graph is generated, and then as soon as the PGX server pods restart, the graph is pre-loaded to the Compliance Studio.

- Create a backup of `pgx.conf`. The backup can be used when the graph is generated from ETL.
- At the time of deployment, you must delete the following lines from the `pgx.conf` file.

```
"preload_graphs": [
  {
    "path": "##URL_GLOBAL_GRAPH_CONFIG_JSON##",
    "name": "##PGX_GLOBAL_GRAPH_NAME##",
    "publish": false,
    "publish_with_snapshots": true
  }
],
```

- The following lines must be delete multiple times.

```
,
  {
    "preloaded_graph": "##PGX_GLOBAL_GRAPH_NAME##",
    "grant": "manage"
  }
}
```

- Proceed with the Compliance Studio deployment.
- Once the graph is generated, perform the following:
  - Replace the existing `pgx.conf` file with the backed up `pgx.conf` file
- Restart Compliance Studio.

### 4.11.1.3 Loading the graph generated from the Graph Pipeline

You can load a graph generated from the Graph pipeline based on the following:

1. To configure the PGX service, see the [Configure the PGX Service](#) section.
2. In the `config.sh` file set the `LOAD_GRAPH_FROM_HDFS` parameter to load the graph:
  - If **True**, both the graph pipeline and legacy ETL will be loaded.
  - If **False**, the graph pipeline only will be loaded.
3. Start/restart the PGX service.
4. To refresh the graph, see the **Creating a Population Schedule** section in the [OFS Compliance Studio User Guide](#) and perform the steps from **10** to **12**.  
The graph will be loaded.
5. To verify the loaded graph details, kindly create a new notebook and query the graph using `pgql`.

## 4.12 Apply Fine-Grained access control and Redaction Changes for Compliance Studio

After generating the key store file and adding the batch service to the PGX trust store, you must configure the user mapping for the changes made in the database. For more information about configuring user mapping, see the [OFS Compliance Studio Administration and Configuration Guide](#).

## 4.13 Configure the config.sh File

### NOTE

**For upgrade scenario:** The value of highlighted parameters from the `config.sh` file has to be re-utilized from the previous version of Compliance Studio. If you upgrade from 8.0.8.\* to CS 8.1.2.3.0, the additional parameters can be configured as mentioned in this section.

To configure the `config.sh` file for installing Compliance Studio, follow these steps:

1. Login to the server as a non-root user.
2. Navigate to the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/bin` directory.
3. Configure the applicable `config.sh` attributes are shown in the following table.

A sample `config.sh` file is shown:

**Figure 5: Sample Config.sh File**

```

$?/usr/bin/ssh bash
## COMPLIANCE_STUDIO_INSTALLATION_PATH path is absolute path including folder, 'OFS_COMPLIANCE_STUDIO'.
## Example: /home/compliancestudio/OFS_COMPLIANCE_STUDIO
export COMPLIANCE_STUDIO_INSTALLATION_PATH=
## NON_OFSSA: Accepted values: true or false
export NON_OFSSA=false
## GRAPH_SOURCE Expected value : ED or ECH. This is source of data for ETL.
export GRAPH_SOURCE=EDM
export ECH_SCHEMA_NAME=
export FCIM_SCHEMA=EDM
## SSL Configuration
## Please place the SSL file after renaming it in 'COMPLIANCE_STUDIO_INSTALLATION_PATH/datastudio/server/conf' as file 'studio_server.pl2'
export STUDIO_SERVER_SSL_PASSWORD=
export STUDIO_SERVER_SSL_ALIAS=
## Keystore file name and password for batchservice's certificate. Please place the certificate in 'COMPLIANCE_STUDIO_INSTALLATION_PATH/batchservice/conf'.
export KEYSTORE_FILE_NAME=
export KEYSTORE_PASS=
## Authentication Realm. Values are: SAML or AAI
export AUTH_REALM=SAML
export COOKIE_DOMAIN=in.oracle.com
## AAI related configuration
export AAI_URL=NA
## SAML related Configuration
export SAML_DESTINATION=
export SAML_ROLE_ATTRIBUTES=GROUP
export SAML_LOGOUT_URL=
## In case of integration of Compliance Studio with another product, example: ECH-IR integration, update the API_USERS with ',' value of API Users
export API_USERS=CS_API_USER,BATCH_USER

```

### NOTE

- You must manually set the parameter value in the `config.sh` file. If a value is not applicable, enter NA and ensure that the value is not entered as **NULL**.
- If the parameter `STUDIO_DB_SERVICE_NAME` has been filled, the parameter `STUDIO_DB_SID` should be left **blank**, and vice versa.
- If the parameter `ATOMIC_DB_SERVICE_NAME` has been filled, the parameter `ATOMIC_DB_SID` should be left **blank**, and vice versa.

Table 14 lists configuration parameters of the `config.sh` file:

**Table 14: config.sh file**

Parameter	Significance	Installing with OFSAA (Mandatory)	Upgrading with OFSAA (Mandatory)	Installing without OFSAA (Mandatory)	Upgrading without OFSAA (Mandatory)
COMPLIANCE_STUDIO_INSTALLATION_PATH	Indicates the path where the Compliance Studio installer file is extracted.	Yes	Yes. Provide the path where the new installer is extracted. Forexample, <code>/scratch/test user/OFS_COMPLIANCE_STUDIO</code> .	Yes	Yes
NON_OFSAA	To install Compliance Studio with OFSAA, enter "false". To install Compliance Studio without OFSAA, enter "true".	Enter false	Enter false	Enter true	Enter true
GRAPH_SOURCE					



**Table 14: config.sh file**

GRAPH_SOURCE	<p>Indicates the source database for Compliance Studio. The available options are ECM and BD.</p> <p><b>NOTE:</b></p> <ul style="list-style-type: none"> <li>• Compliance Studio can use either the BD or ECM schema as the source of FCDM data for the graph.</li> <li>• Ensure to enter the value as ECM whenever ECM integration is required with Investigation Hub.</li> </ul> <p>Here, the ECM schema is used as the source of the FCDM data to load the case information into the graph.</p>	Enter BD or ECM	<p>Enter BD or ECM.</p> <p>Enter the value of this parameter from the previous version of the Compliance Studio <code>config.sh</code> file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter according to the Graph source, ECM/BD.</p>	Enter NA	Enter NA
--------------	--	-----------------	---	----------	----------

**Table 14: config.sh file**

ECM_SCHEMA_NAME	ECM Schema name	ECM Schema name	ECM Schema name. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Enter NA	Enter NA
FCDM_SCHEMA	This indicated the datasource for the Production workspace. The available options are ECM and BD.	Enter BD or ECM	Enter BD or ECM. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Enter NA	Enter NA
<b>SSL file</b>					

**Table 14: config.sh file**

STUDIO_SERVER_SSL_PASSWORD	Indicates the password for Studio Server P12 that is required for HTTPS configuration.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Yes	Yes
STUDIO_SERVER_SSL_ALIAS	Indicates the alias name for P12 for the Studio Server	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Yes	Yes
<b>Authentication Realm</b>					

**Table 14: config.sh file**

<p>AUTH_REALM</p>	<p>Realm indicates the functional grouping of database schemas and roles that must be secured for an application. Realms protect data from access through system privileges; realms do not give its owner or participant's additional privileges.</p> <p>Compliance Studio uses realm-based authorization and authentication for its users. For more information, see the Realm Based Authorization for Compliance Studio section in the <a href="#">OFS Compliance Studio Administration and Configuration Guide</a>.</p> <p>The Compliance Studio application can be accessed using the following realms:</p> <p><b>FCCMRealm</b> Value=AAI</p> <p><b>FCCSamlRealm</b> Value=SAML</p>	<p>Yes</p>	<p>Yes.</p> <p>Enter the value of this parameter from the previous version of the Compliance Studio <code>config.sh</code> file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.</p>	<p>Yes</p>	<p>Yes</p>
-------------------	---	------------	---	------------	------------

**Table 14: config.sh file**

COOKIE_DOMAIN	The domain of the server. Example: in.oracle.com	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Yes	Yes
AAI related configuration					
AAI_URL	OFSAA URL.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	No	No

**Table 14: config.sh file**

<p><b>SAML</b> <b>The SAML-related parameters are applicable only if SAMLRealm is used in the Realm parameter.</b></p>	<ol style="list-style-type: none"> <li>1. In the case of SAML Realm, the certificate from IDP (<b>key.cert</b> file) is required.</li> <li>2. The certificate that is obtained from the IDP must be renamed to <b>key.cert</b> and placed in the <code>&lt;COMPLIANCE_STUDIO_INSTALLATION_PATH &gt;/mmg-home/mmg-studio/conf</code> directory.</li> <li>3. This certificate is used to identify the trust of the SAML response from the Identity Provider.</li> <li>4. Specify the Role Attribute name from IDP, in which the User Roles are present in the SAML response.</li> </ol>				
<p>SAML_DESTINATION</p>	<p>Indicates the SAML IDP URL that the Identity Provider provides after creating the SAML Application.</p>	<p>Yes</p>	<p>Yes. Enter the value of this parameter from the previous version of the Compliance Studio <code>config.sh</code> file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.</p>	<p>Yes</p>	<p>Yes</p>

**Table 14: config.sh file**

SAML_ROLE_ATTRIBUTUTE	Indicates the SAML client identifier provided by the SAML Administrator for the Role and Attributes information while creating the SAML application for Compliance Studio.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio <code>config.sh</code> file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Yes	Yes
SAML_LOGOUT_URL	Indicates the SAML client identifier provided by the SAML Administrator for the Logout URL information while creating the SAML application for Compliance Studio.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio <code>config.sh</code> file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Yes	Yes
<b>Integrate with other products</b>					
API_USERS	Retain the default settings.	Yes	Yes. Retain Default Settings.	Yes	Yes

**Table 14: config.sh file**

VALID_ROLES	Retain the default settings.	Yes	Yes. Retain Default Settings.	Yes	Yes
<b>MMG Service Configurations</b>					
SESSION_TOKEN_CREDENTIALS	Set password to generate Authorization Header Token to communicate with mmg-services	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Yes	Yes
FCC_API_USER	Retain the default settings.	Yes	Yes. Retain Default Settings.	Yes	Yes
SSO_TOKEN	This is the API token for FCC_API_USER. See the <a href="#">Generate API token for CS API User</a> for token value.	Yes	Yes. See the <a href="#">Generate API token for CS API User</a> for token value.	Yes	Yes



**Table 14: config.sh file**

MMG_DATASOURCE_ MAX_POOL_SIZE	Maximum connection pool size allowed for Config Data Source. 50	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio <code>config.sh</code> file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Yes	Yes
MMG_DATASOURCE_ IDLE_TIMEOUT	Idle timeout for Config Data Source in a millisecond. 30000	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio <code>config.sh</code> file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Yes	Yes

**Table 14: config.sh file**

MMG_DATASOURCE_CONN_TIMEOUT	Connection timeout for Config Data Source in milliseconds. 30000	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Yes	Yes
EXT_DATASOURCE_MAX_POOL_SIZE	Maximum connection pool size allowed for Meta/Data Schemas. 50	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Yes	Yes

**Table 14: config.sh file**

EXT_DATASOURCE_IDLE_TIMEOUT	Idle timeout for Meta/Data Schemas in milliseconds. 30000	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Yes	Yes
EXT_DATASOURCE_CONNECTION_TIMEOUT	Connection timeout for Meta/Data Schemas in milliseconds. 30000	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Yes	Yes

**Table 14: config.sh file**

SERVER_COOKIE_TIMEOUT	Connection timeout for server cookie in milliseconds. 86400	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Yes	Yes
<b>DB Details for Studio Schema</b> <b>You must be logged in as SYSDBA to perform these configurations.</b>					
STUDIO_DB_HOSTNAME	Indicates the hostname of the database where the Compliance Studio schema is created.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio/ FCCSTUDIO config.sh file.	Yes	Yes

**Table 14: config.sh file**

STUDIO_DB_PORT	Indicates the port number where the Compliance Studio schema is created.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio/ FCCSTUDIO config.sh file.	Yes	Yes
STUDIO_DB_SERVICE_NAME	Indicates the service name of the database where the Studio schema is created.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio/ FCCSTUDIO config.sh file.	Yes	Yes
STUDIO_DB_SID	Indicates the SID of the database where the Studio schema is created.  <b>NOTE:</b> Set this field as blank if there is no SID for Database.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio/ FCCSTUDIO config.sh file.	Yes	Yes

**Table 14: config.sh file**

STUDIO_DB_USERNAME	Indicates the username of the Compliance Studio Schema (newly created Oracle Schema).	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio/ FCCSTUDIO config.sh file.	Yes	Yes
STUDIO_DB_PASSWORD	Indicates the password of the Studio schema.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio/ FCCSTUDIO config.sh file.	Yes	Yes
STUDIO_DB_ENCRYPTED_PASSWORD	Indicates the encrypted password that is provided for the Studio schema.  For example, cGFzc3dvcmQ. <b>NOTE:</b> See <a href="#">Generate an Encrypted Password</a> section to generate this encrypted password.	Yes	Yes. See <a href="#">Generate an Encrypted Password</a> section to generate this encrypted password.	Yes	Yes
<b>DB Details of Atomic Schema</b>					

**Table 14: config.sh file**

ATOMIC_DB_HOSTNAME	The hostname of the database where Atomic schema is present. (BD/ECM config)	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio/ FCCSTUDIO config.sh file.	Yes	Yes
ATOMIC_DB_PORT	Port number of database where Atomic schema is present.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio/ FCCSTUDIO config.sh file.	Yes	Yes
ATOMIC_DB_SERVICE_NAME	The service name of the database where Atomic schema is present.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio/ FCCSTUDIO config.sh file.	Yes	Yes

**Table 14: config.sh file**

ATOMIC_DB_SID	Service id of database where Atomic schema is present. <b>NOTE:</b> Set this field as blank if there is no SID for Database.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio/ FCCSTUDIO config.sh file.	Yes	Yes
ATOMIC_DB_USERNAME	Username of Atomic schema	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio/ FCCSTUDIO config.sh file.	Yes	Yes
ATOMIC_DB_PASSWORD	The password of the Atomic schema	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio/ FCCSTUDIO config.sh file.	Yes	Yes
<b>Studio DB Wallet Details</b> <b>For information on creating a wallet, see Setup Password Stores with Oracle Wallet.</b>					



**Table 14: config.sh file**

WALLET_LOCATION	Indicates the Compliance Studio wallet location.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio/ FCCSTUDIO.	Yes	Yes
TNS_ADMIN_PATH	Indicates the path of the tnsnames.ora file where an entry for the STUDIO_ALIAS_NAME is present.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio/ FCCSTUDIO.	Yes	Yes
STUDIO_ALIAS_NAME	Indicates the Studio alias name. <b>NOTE:</b> Enter the alias name that was created during wallet creation.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio/ FCCSTUDIO.	Yes	Yes
ATOMIC_ALIAS_NAME	Indicates alias name of FCDM source atomic schema given in wallet	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio/ FCCSTUDIO.	Yes	Yes

**Table 14: config.sh file**

Cloudera Setup Details					
<b>Contact your System Administrator to obtain the required details for these parameters.</b>					
STUDIO_HADOOP_CREDENTIAL_ALIAS	Indicated the alias password saved in Hadoop. For example, studio.password.alias	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Yes	Yes
STUDIO_HADOOP_CREDENTIAL_PATH	Indicates the credentials path. For example, <Compliance Studio Installed Path>oracle.password.jceks	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Yes	Yes

**Table 14: config.sh file**

<p>HADOOP_CREDENTIAL_PROVIDER_PATH</p>	<p>Indicates the path where the Hadoop credential is stored.</p>	<p>Yes</p>	<p>Yes. Enter the value of this parameter from the previous version of the Compliance Studio <code>config.sh</code> file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.</p>	<p>Enter NA</p>	<p>Enter NA</p>
<p>HADOOP_PASSWORD_ALIAS</p>	<p>Indicates the Hadoop alias given when creating the Hadoop credentials. For information on creating a credential keystore, see <a href="#">Create the Credential Keystore</a>.</p>	<p>Yes</p>	<p>Yes. Enter the value of this parameter from the previous version of the Compliance Studio <code>config.sh</code> file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.</p>	<p>Enter NA</p>	<p>Enter NA</p>

**Table 14: config.sh file**

Hive_Host_Name	Indicates the Hive hostname.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio <code>config.sh</code> file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Enter NA	Enter NA
Hive_Port_number	Indicates the Hive port number. Contact your Studio Administrator to obtain the port number.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio <code>config.sh</code> file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Enter NA	Enter NA

**Table 14: config.sh file**

HIVE_PRINCIPAL	Indicates the Hive Principal. Contact your Studio Administrator to obtain the HIVE_PRINCIPAL value.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio <code>config.sh</code> file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Enter NA	Enter NA
HIVE_SCHEMA	Indicates to create a schema in HIVE.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio <code>config.sh</code> file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Enter NA	Enter NA

**Table 14: config.sh file**

Krb_Host_FQDN_Name	Indicates the Kerberos host FQDN name.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio <code>config.sh</code> file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Enter NA	Enter NA
Krb_Realm_Name	Indicates the Kerberos realm name.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio <code>config.sh</code> file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Enter NA	Enter NA

**Table 14: config.sh file**

Krb_Service_Name	Indicates the Kerberos service name. Example: Hive	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio <code>config.sh</code> file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Enter NA	Enter NA
server_kerberos_keytab_file	Indicates the Kerberos keytab file.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio <code>config.sh</code> file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Enter NA	Enter NA

**Table 14: config.sh file**

server_kerberos_principal	Indicates the Kerberos Principal.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Enter NA	Enter NA
server_kerberos_krb5_conf_file	Indicates the krb5.conf file name.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Enter NA	Enter NA



**Table 14: config.sh file**

<p>SQOOP_HOSTMACHINE_USER_NAME</p>	<p>Indicates the username of the Host machine where sqoop will run.</p>	<p>Yes</p>	<p>Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.</p>	<p>Enter NA</p>	<p>Enter NA</p>
<p>SQOOP_PARAMFILE_PATH</p>	<p>1. Create a file with the name sqoop.properties in the Big Data server and add the following entry: oracle.jdbc.mapDateToTimestamp=false 2. Enter the location of the sqoop.properties file as the value for this parameter. Example: /scratch/ofsaa/ <b>NOTE:</b> Ensure that the location name ends with a'/</p>	<p>Yes</p>	<p>Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.</p>	<p>Enter NA</p>	<p>Enter NA</p>

**Table 14: config.sh file**

<p>SQOOP_PARTITION_COL</p>	<p>Indicates the column in which the HIVE table is partitioned. The value must be SNAPSHOT_DT.</p>	<p>Yes</p>	<p>Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.</p>	<p>Enter NA</p>	<p>Enter NA</p>
<p>SQOOP_TRG_HOSTNAME</p>	<p>Indicates the hostname of the Big Data server where SQOOP will run. Example: &lt;HostName&gt;</p>	<p>Yes</p>	<p>Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.</p>	<p>Enter NA</p>	<p>Enter NA</p>

**Table 14: config.sh file**

SQOOP_WORKDIR_HDFS	Indicates the Sqoop working directory in HDFS. Example: /user/ofsaa	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Enter NA	Enter NA
<b>ETL</b>					
HDFS_GRAPH_FILES_PATH	Indicates the file path in the HDFS where the graph.json is formed.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	No	No

**Table 14: config.sh file**

GRAPH_FILES_PATH	Indicates the directory in the Big Data server for graph files.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio <code>config.sh</code> file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	No	No
GRAPH_NAME	Indicates the name you want to assign to the global graph at the end of ETL.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio <code>config.sh</code> file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	No	No

**Table 14: config.sh file**

<p>ETL_PROCESSING_RANGE</p>	<p>Indicates the duration for which the data would be moved from Oracle to Hive.  For example: If the ETL_PROCESSING_RANGE = 2Y, 3M, 10D, that is, 2 years, 3 months, and 10 days, and the current date is 20200814, then the data movement occurs for the range 20180504 to 20200814.</p>	<p>Yes</p>	<p>Yes.  Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.</p>	<p>No</p>	<p>No</p>
<p>OLD_GRAPH_SESSION_DURATION</p>	<p>Indicates that the session older than this specified duration will be removed from the PGX server. If unsure, you can set this value for a week (7D).</p>	<p>Yes</p>	<p>Yes.  Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.</p>	<p>No</p>	<p>No</p>

**Table 14: config.sh file**

<p>REMOVE_TRNXS_EDGE_AFTER_DURATION</p>	<p>Indicates the date range for which transaction edges will be maintained in the graph. For example, 6Y, 3M, 10D, which means 6 years, 3 months, and 15 days.</p>	<p>Yes</p>	<p>Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.</p>	<p>No</p>	<p>No</p>
<p>CONNECTOR_CHANNEL_SIZE</p>	<p>Indicates the number of nodes or edges you want to process during an update of the graph. If unsure, you can set it to 10000.</p>	<p>Yes</p>	<p>Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.</p>	<p>No</p>	<p>No</p>

**Table 14: config.sh file**

CB_CONFIGURED	Indicates the setting of the graph edges. When the corresponding edges of the graph are needed, set the value to true.	Enter true or false	Enter true or false. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Enter NA	Enter NA
<b>Elastic Search Cluster details</b>					
ELASTIC_SEARCH_HOSTNAME	Indicates the hostname of the database where the elastic search service is installed.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Yes	Yes

**Table 14: config.sh file**

ELASTIC_SEARCH_PORT	Indicates the port number where the elastic search service is installed.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Yes	Yes
ELASTIC_SEARCH_HADOOP_CREDENTIAL_PATH	Indicates the elastic search hadoop credential path.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Yes	Yes



**Table 14: config.sh file**

ELASTIC_SEARCH_USERNAME	Elastic Search Username (Not Applicable, if https enabled is false and authentication is not supported).	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio <code>config.sh</code> file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Yes	Yes
ELASTIC_SEARCH_ENCRYPTED_PASSWORD	Encrypted password (Not Applicable, if https enabled is false and authentication is not supported). <b>NOTE:</b> See <a href="#">Generate an Encrypted Password</a> section to generate this encrypted password.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio <code>config.sh</code> file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Yes	Yes

**Table 14: config.sh file**

<p>ELASTIC_SEARCH_HADOOP_PASSWORD_ALIAS</p>	<p>Indicates the password alias for Elastic Search (Not applicable if ES ELASTIC_SEARCH_HTTPS_ENABLED is false).</p>	<p>Yes</p>	<p>Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.</p>	<p>Yes</p>	<p>Yes</p>
<p>ELASTIC_SEARCH_HTTPS_ENABLED</p>	<p>True (If ES is https enabled, else false)</p>	<p>Yes</p>	<p>Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.</p>	<p>Yes</p>	<p>Yes</p>

**Table 14: config.sh file**

<p>ELASTIC_SEARCH_TRUSTSTORE_FILENAME</p>	<p>The filename of the ElasticSearch keystore that contains the certificates of ES host to trust (Not Applicable, if https enabled is false)</p>	<p>Yes</p>	<p>Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.</p>	<p>Yes</p>	<p>Yes</p>
<p>ELASTIC_SEARCH_TRUSTSTORE_PASSWORD</p>	<p>The password of the Elasticsearch keystore file. (Not Applicable, if https enabled is false).</p>	<p>Yes</p>	<p>Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.</p>	<p>Yes</p>	<p>Yes</p>

**Table 14: config.sh file**

ELASTIC_SEARCH_K EYSTORE_HADOOP_ CREDENTIAL_ALIAS	Indicates the password alias for Elastic Search (Not applicable if ES ELASTIC_SEARCH_HTTPS_ENABLED is false).	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Yes	Yes
ES_JARS_LOCATION	Indicates the path where ES Rest High Level Client dependencies are available. <b>NOTE:</b> ES_JARS_LOCATION should be in the same server where Compliance Studio is installed and should have read access for the folder.	No	No	No	No
<b>Logstash</b>					

**Table 14: config.sh file**

LOGSTASH_HOME	<p>Logstash home Example: "/&lt;br&gt;&lt;COMPLIANCE_STUDIO_INSTALLATION_PATH&gt;/Logstash/logstash-7.14.0"</p> <p><b>NOTE:</b> See the section <a href="#">Configure Logstash</a> for more details.</p>	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Yes	Yes
<b>Graph Service</b>					
GRAPH_DB_SERVER_NAME	Indicates the Graph Database server name.	No	No	No	No
GRAPH_DB_PORT	Indicates the Graph Database server port.	No	No	No	No
GRAPH_DB_SERVICE_NAME	Indicates the Graph Database service name.	No	No	No	No

**Table 14: config.sh file**

GRAPH_KEYSTORE_PASSWORD	Indicates the password of the keystore file, which stores the password of the graph schemas	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Yes	Yes
<b>PGX server configuration, i.e., Interpreter, data memory limits</b>					
NUM_CACHED_RESULTSET	Indicates the cached result set. For example, 0	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	No	No

**Table 14: config.sh file**

RESULTSET_EXPIRATION_TIME_SECS	Indicates the Result set expiration time. For example, 3600.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	No	No
MAX_TOTAL_SHARED_DATA_MEMORY_SIZE	The absolute memory limit of shared data (includes published graphs and pinned non-referenced graphs). For example: 20G	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	No	No

**Table 14: config.sh file**

<p>MAX_TOTAL_PRIVATE_DATA_MEMORY_SIZE</p>	<p>The memory limit of private data (includes non-published graphs and PGQL results) relative to the total PGX engine memory limit. For example, 8G</p>	<p>Yes</p>	<p>Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.</p>	<p>No</p>	<p>No</p>
<p>MAX_PER_SESSION_DATA_MEMORY_SIZE</p>	<p>Absolute memory limit for any one session of the PGX engine. For example: 700M</p>	<p>Yes</p>	<p>Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.</p>	<p>No</p>	<p>No</p>



**Table 14: config.sh file**

<p>MAX_DATA_MEMORY_SIZE_DSUSRGRP</p>	<p>Absolute memory limit for any user of the PGX engine whose role is DSUSRGRP. For example: 2G</p>	<p>Yes</p>	<p>Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.</p>	<p>No</p>	<p>No</p>
<p>MAX_DATA_MEMORY_SIZE_DSBATCH</p>	<p>Absolute memory limit for any user of the PGX engine whose role is DSBATCH. For example: 10G</p>	<p>Yes</p>	<p>Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.</p>	<p>No</p>	<p>No</p>

**Table 14: config.sh file**

<p>MAX_DATA_MEMORY_SIZE_DSINTER</p>	<p>Absolute memory limit for any user of the PGX engine whose role is DSINTER. For example: 5G</p>	<p>Yes</p>	<p>Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.</p>	<p>No</p>	<p>No</p>
<p>MAX_DATA_MEMORY_SIZE_DSAPPROVER</p>	<p>Absolute memory limit for any user of the PGX engine whose role is DSAPPROVER. For example: 5G</p>	<p>Yes</p>	<p>Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.</p>	<p>No</p>	<p>No</p>

**Table 14: config.sh file**

MAX_DATA_MEMORY_SIZE_DSUSER	Absolute memory limit for any user of the PGX engine whose role is DSUSER. For example, 5G	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	No	No
<b>Service URLs</b>					
PGX_SERVER_URL	Indicates the comma ',' separated values of PGX URLs. If you have only one PGX URL, the value is http://<server1>:7007. <b>NOTE:</b> Ensure to provide the correct hostname for the URL of the PGX service.	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	No	No

**Table 14: config.sh file**

<p><b>Quantifind Details</b> In the case of Quantifind, the generated Quantifind token must be encoded. Use the <code>&lt;Fic_DB_path&gt;/FCCM_Studio_Base64Encoder.sh</code> file for encoding Quantifind token.</p>					
<p>QUANTIFIND_URL</p>	<p>Indicates the URL of the Quantifind. For example, <code>https://api-test.quantifind.com</code></p>	<p>Yes</p>	<p>Yes. Enter the value of this parameter from the previous version of the Compliance Studio <code>config.sh</code> file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.</p>	<p>Yes</p>	<p>Yes</p>

**Table 14: config.sh file**

<p>ENCRYPTED_QUANTIFIND_TOKEN</p>	<p>Indicates the token that is generated when integrating with Quantifind.</p> <p>For example, c2FtcGxIX2VuY3J5cHRIZF9xdWFudGlmaW5kX3Rva2Vu</p> <p><b>NOTE:</b> See <a href="#">Generate an Encrypted Password</a> section to generate this encrypted password.</p>	<p>Yes</p>	<p>Yes.</p> <p>Enter the value of this parameter from the previous version of the Compliance Studio <code>config.sh</code> file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.</p>	<p>Yes</p>	<p>Yes</p>
<p>QUANTIFIND_APPNAME</p>	<p>Indicates the Quantifind App Name.</p> <p>For example, OracleIntegrationTest</p>	<p>Yes</p>	<p>Yes.</p> <p>Enter the value of this parameter from the previous version of the Compliance Studio <code>config.sh</code> file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.</p>	<p>Yes</p>	<p>Yes</p>

**Table 14: config.sh file**

<p>QUANTIFIND_ENABLED</p>	<p>Indicates that Quantifind is enabled. Options are True or False.</p>	<p>Yes</p>	<p>Yes. Enter the value of this parameter from the previous version of the Compliance Studio <code>config.sh</code> file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.</p>	<p>Yes</p>	<p>Yes</p>
<p>HTTPS_PROXY_HOST</p>	<p>Indicates the proxy host that is used. For example, <code>www-proxy-idc.in.oracle.com</code></p>	<p>Yes</p>	<p>Yes. Enter the value of this parameter from the previous version of the Compliance Studio <code>config.sh</code> file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.</p>	<p>Yes</p>	<p>Yes</p>

**Table 14: config.sh file**

HTTPS_PROXY_PORT	Indicates the proxy port that is used. For example, 80	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Yes	Yes
HTTP_PROXY_USER NAME	Indicates the proxy username used, if there is any. For example, ##HTTP_PROXY_USERNAME##	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Yes	Yes

**Table 14: config.sh file**

HTTP_PROXY_PASS WORD	Indicates the proxy password used if there is any. For example, ##HTTP_PROXY_PAS SWORD##	Yes	Yes. Enter the value of this parameter from the previous version of the Compliance Studio config.sh file. If you are upgrading from 8.0.8.* to CS 8.1.2.3.0, then update this parameter accordingly.	Yes	Yes
<b>R interpreter settings</b>					
RS_CONF_PATH	Absolute path to Rserve.conf file for running Rserve Example: /scratch/ users/mmg-studio/ conf/Rserve.conf <b>NOTE:</b> If required, then configure the parameter.	No	No	No	No
RS_KEYSTORE	Absolute path for the Keystore file made for Rserve.conf Example: /scratch/ users/mmg-studio/ conf/ rinterpreterkeystore <b>NOTE:</b> If required, then configure the parameter.	No	No	No	No



**Table 14: config.sh file**

RS_KS_SECRET	Keypass for rinterpreterkeystore Example: Change it. If the target AAI is https, then the certificate of the target machine needs to be imported to the DS Java keystore <b>NOTE:</b> If required, then configure the parameter.	No	No	No	No
<b>Additional Environment variables</b>					
LD_LIBRARY_PATH	Oracle Instant client path For example: /opt/oracle/instantclient_19_8/:\$LD_LIBRARY_PATH				
<b>All Services</b>	Set the value of the parameter, DEPLOY_ALL_SERVICE, as : <ul style="list-style-type: none"> <li>• <b>true</b> for starting all services</li> <li>• <b>false</b> for starting selected services</li> </ul> Examples: <ul style="list-style-type: none"> <li>• Compliance Studio independent of OFSAA: set "false" for service(s): entity-resolution, matching-service, and load-to-elastic</li> <li>• Compliance Studio lite: set "false" for service(s): fcc-pgql, fcc-pgx-algorithm, fcc-pgx-java and pgx-server.</li> </ul>				
DEPLOY_ALL_SERVICE	True: Indicates that all services are deployed.	Yes	Yes	Yes	Yes

**Table 14: config.sh file**

Services					
METASERVICE_ENABLED	True: Indicates that the service is enabled.	Yes	Yes	Yes	Yes
BATCHSERVICE_ENABLED	True: Indicates that the service is enabled.	Yes	Yes	Yes	Yes
GRAPH_SERVICE_ENABLED	True: Indicates that the service is enabled.	Yes	Yes	Yes	Yes
FCC_PYTHON_ENABLED	True: Indicates that the service is enabled.	Yes	Yes	Yes	Yes
JDBC_ENABLED	True: Indicates that the service is enabled.	Yes	Yes	Yes	Yes
SPARK_ENABLED	True: Indicates that the service is enabled.	Yes	Yes	Yes	Yes
PGX_ENABLED	True: Indicates that the service is enabled.	Yes	Yes	Yes	Yes
ENTITY_RESOLUTION_ENABLED	True: Indicates that the service is enabled.	Yes	Yes	Yes	Yes
MATCHING_SERVICE_ENABLED	True: Indicates that the service is enabled.	Yes	Yes	Yes	Yes
LOAD_TO_ELASTICSEARCH_ENABLED	True: Indicates that the service is enabled.	Yes	Yes	Yes	Yes
MMG_SERVICE_ENABLED	True: Indicates that the service is enabled.	Yes	Yes	Yes	Yes

## 4.14 Configure the resources.xml for Multiple ER Schemas

**NOTE**

- **ER\_Schema ID** should always be unique.
- For ease of execution, it is recommended to have the same **Er\_Data\_Schema\_Alias\_Name** as the **ER\_Schema\_ID**.
- **Er\_Data\_Schema\_Alias\_Name** and **ER\_Schema\_ID** are case sensitive, so it is recommended to use the same case for both of them.

1. Navigate to `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/ficdb/conf`

**NOTE**

If the user wants to add additional ER schemas post-installation, the path will change to:

```
<COMPLIANCE_STUDIO_INSTALLATION_PATH>/
deployed/ficdb/conf
```

The remaining steps will remain the same.

2. Open `resources.xml` file.

3. Provide the **id** as `ER_Schema_ID` and **ER\_DATA\_SCHEMA\_ALIAS\_NAME** as `ER_Schema_Alias`.

The sample resource tag will look like the following, and users can change the values as applicable:

```
<Resource
    id="##ER_DATA_SCHEMA_ALIAS_NAME##"
    name="jdbc/erdataschema"
    auth="Container"
    type="javax.sql.DataSource"
    driverClassName="oracle.jdbc.OracleDriver"
    url="jdbc:oracle:thin:@##ER_DATA_SCHEMA_ALIAS_NAME##"
    connectionProperties="oracle.net.wallet_location
##STUDIO_WALLET_LOCATION##;
oracle.net.tns_admin=##STUDIO_TNS_ADMIN_PATH##;"
    maxTotal="20"
    maxIdle="0"
    maxWaitMillis="-1" >
</Resource>
```

Example `resource.xml` tag with single ER Schema:

```
<Resource
    id="ER1"
    name="jdbc/erdataschema"
    auth="Container"
    type="javax.sql.DataSource"
    driverClassName="oracle.jdbc.OracleDriver"
    url="jdbc:oracle:thin:@ER1"
    connectionProperties="oracle.net.wallet_location
##STUDIO_WALLET_LOCATION##;
oracle.net.tns_admin=##STUDIO_TNS_ADMIN_PATH##;"
    maxTotal="20"
    maxIdle="0"
    maxWaitMillis="-1" >
</Resource>
```

4. The sample can be repeated for multiple ER Schemas with a unique id and `ER_Schema_Alias`.

Example `resource.xml` tag with multiple ER Schemas:

```
<Resource
    id="ER1"
```

```
        name="jdbc/erdataschema"
        auth="Container"
        type="javax.sql.DataSource"
        driverClassName="oracle.jdbc.OracleDriver"
        url="jdbc:oracle:thin:@ER1"
        connectionProperties="oracle.net.wallet_location
===STUDIO_WALLET_LOCATION===;
oracle.net.tns_admin===STUDIO_TNS_ADMIN_PATH===;"
        maxTotal="20"
        maxIdle="0"
        maxWaitMillis="-1" >
    </Resource>
<Resource
    id="ER2"
    name="jdbc/erdataschema"
    auth="Container"
    type="javax.sql.DataSource"
    driverClassName="oracle.jdbc.OracleDriver"
    url="jdbc:oracle:thin:@ER2"
    connectionProperties="oracle.net.wallet_location
===STUDIO_WALLET_LOCATION===;
oracle.net.tns_admin===STUDIO_TNS_ADMIN_PATH===;"
    maxTotal="20"
    maxIdle="0"
    maxWaitMillis="-1" >
</Resource>
```

**NOTE**

Make sure that the following parameters are updated with the values:

```
maxTotal="20"
maxIdle="0"
```

## 4.15 Configure the resources.xml for Graph Schema

To update the resources.xml files, perform the step:

1. Navigate to <COMPLIANCE\_STUDIO\_INSTALLATION\_PATH>/ficdb/conf and add details of the wallet alias as shown below:

**NOTE** For OOB Graph execution, add wallet details of BD Schema and Graph Schema.

```
<?xml version="1.0" encoding="UTF-8"?>
<Resources>
  <Resource
    id="complianceStudioSchemaWalletAlias"
    name="jdbc/studioschema"
    auth="Container"
    type="javax.sql.DataSource"
    driverClassName="oracle.jdbc.OracleDriver"
    url="jdbc:oracle:thin:@complianceStudioSchemaWalletAlias "
    connectionProperties="oracle.net.wallet_location=/scratch/
fccstudio/OFS_COMPLIANCE_STUDIO/wallet;oracle.net.tns_admin=/scratch/
fccstudio/OFS_COMPLIANCE_STUDIO/wallet;"
    maxTotal="5"
    maxIdle="0"
    maxWaitMillis="-1">
  </Resource>
  <Resource
    id="bdAtomicSchemaWalletAlias"
    name="jdbc/erdataschema"
    auth="Container"
    type="javax.sql.DataSource"
    driverClassName="oracle.jdbc.OracleDriver"
    url="jdbc:oracle:thin:@bdAtomicSchemaWalletAlias"
    connectionProperties="oracle.net.wallet_location=/scratch/
fccstudio/OFS_COMPLIANCE_STUDIO/wallet;oracle.net.tns_admin=/scratch/
fccstudio/OFS_COMPLIANCE_STUDIO/wallet;"
    maxTotal="5"
    maxIdle="0"
    maxWaitMillis="-1">
  </Resource>
```

```
<Resource
  id="graphSchemaWalletAlias"
  name="jdbc/erdataschema"
  auth="Container"
  type="javax.sql.DataSource"
  driverClassName="oracle.jdbc.OracleDriver"
  url="jdbc:oracle:thin:@graphSchemaWalletAlias"
  connectionProperties="oracle.net.wallet_location=/scratch/
fccstudio/OFS_COMPLIANCE_STUDIO/wallet;oracle.net.tns_admin=/scratch/
fccstudio/OFS_COMPLIANCE_STUDIO/wallet;"
  maxTotal="5"
  maxIdle="0"
  maxWaitMillis="-1">
</Resource>
</Resources>
```

## 4.16 Run the Compliance Studio Installer

This section provides the install, reinstall, start, restart and stop of the services.

### Topics:

- [Installing/Upgrading for the first time](#)
- [Starting Compliance Studio](#)
- [Stopping Compliance Studio](#)
- [Restarting Compliance Studio](#)
- [Reinstalling Compliance Studio](#)

The Compliance Studio application is installed with or without OFSAA, depending on the configuration provided in the `config.sh` file. The Compliance Studio application and all the interpreters are started.

After completing the Compliance Studio installation, the script displays a URL that can be used to access the Compliance Studio Application.

### 4.16.1 Installing/Upgrading for the first time

For first-time installation, you can pass argument '-i' or '--install'.

To run the Compliance Studio installer, follow these steps:

1. Navigate to the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/bin` directory.
2. Run the following command with a Linux user where Compliance Studio is installed:

```
./compliance-studio.sh -i
```

Or

```
./compliance-studio.sh --install
```

This will copy the whole compliance studio into the folder 'deployed' and then replaces the placeholders. Now, you can start Compliance Studio.

**NOTE**

- Run these commands only from < COMPLIANCE\_STUDIO\_INSTALLATION\_PATH>/bin.
- It should not be run from < COMPLIANCE\_STUDIO\_INSTALLATION\_PATH>/deployed/bin.
- Upon executing `./compliance-studio.sh -i` command. A deployed folder is created that copies all the folders. And replaces placeholders inside the deployed folder.

Congratulations! Your installation is complete.

**NOTE**

For any help on installation commands, Run  
`./compliance-studio.sh --help`

## 4.16.2 Starting Compliance Studio

To start the application, you can run pass argument '-s' or '--start'. Example:

```
./compliance-studio.sh --start
```

This will start the application and, on successful installation, will make the sensitive details blank in `config.sh`

**NOTE**

If any of the services are not started/running and failed due to lock, perform the following:

1. Login Studio schema.
2. Run the following command to Truncate tables:  
`TRUNCATE TABLE DATABASECHANGELOGLOCK;`  
`TRUNCATE TABLE DATABASECHANGELOGLOCK_MMG;`
3. Start the Compliance Studio.

Before Starting Compliance Studio, make sure to export "PYTHO\_PATH" and "SANE VIRTUAL NV PATH" in the bash profile as given below:

```
export
PYTHONPATH=/ COMPLIANCE_STUDIO_INSTALLATION_PATH/
OFS_COMPLIANCE_STUDIO/deployed/python-packages/
saneVirtualEnv/lib/python3.6/site-packages
export
PATH=$JAVA_BIN:$PATH:$HOME/.local/bin:$HOME/
bin:$JMETER_HOME/bin:/
COMPLIANCE_STUDIO_INSTALLATION_PATH/
OFS_COMPLIANCE_STUDIO/deployed/python-packages/
saneVirtualEnv/bin:$PATH
```

### 4.16.3 Stopping Compliance Studio

To stop the application, you can run pass argument '-k' or '--stop'. Example:

```
./compliance-studio.sh --stop
```

### 4.16.4 Restarting Compliance Studio

To restart the application, you can run pass argument '-r' or '--restart'. Example:

```
./compliance-studio.sh --restart
```

### 4.16.5 Reinstalling Compliance Studio

In case if you need to reinstall compliance Studio due to the wrong configuration or need to update configuration details. Then:

- Stop the Compliance Studio
- Update the `config.sh` file. Do not forget to reconfigure the sensitive details which were removed earlier.

To restart the application, you can run pass argument '-R' or '--reinstall'. Example:

```
./compliance-studio.sh --reinstall
```

Once reinstallation is done, you can start the application.

## 4.17 Generate the Graph-keystore.p12 File

#### NOTE

- Before creating the `graph-keystore.p12` file, ensure that the graph service is up and running.
- **For upgrade scenario:** Use file from the previous version of CS/FCC studio. If you are upgrading from 8.0.8.\* to CS 8.1.2.3.0, then `graph-keystore.p12` file has to be generated newly by performing the steps mentioned in the section.

To generate the `graph-keystore.p12` file, follow these steps;

1. Navigate to `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/graph-service/utility/bin` directory.
2. Execute the following command:  

```
./CreatePasswordlessKeystore.sh
```
3. It will request for the following values:
  - a. Wallet Alias for Graph Schema
  - b. Keystore Alias

#### NOTE

For Keystore Alias, use the same value that is provided in the wallet alias of the graph schema.



4. The `graph-keystore.p12` file is generated and available in the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/graph-service/conf` directory.
5. Copy the `graph-keystore.p12` file and place in the `<PGX_HOME>/pgx/pgx-server/conf` directory.

**NOTE**

- If you do not have any graph schema then create an empty file with a name “`graph-keystore.p12`” and place it in the `<PGX_HOME>/pgx/pgx-server/deployed/conf` directory.
- The path where the `pgx-server-<version>.zip` file is unzipped is referred to as `<PGX_HOME>`.
- If you are updating credentials then copy the updated `graph-keystore.p12` file and place in the `<PGX_HOME>/pgx/pgx-server/conf` directory.

## 4.18 Configure the PGX Service

**NOTE**

PGX service can be configured on the same server where Compliance Studio is installed or on a different server.

To install PGX service, follow these steps:

**NOTE**

If you are using a Graph pipeline, skip **steps 4, 5, and 6**. This is applicable only in the case of legacy Graph ETL, which requires a Big Data cluster.

1. Navigate to the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/pgx/pgx-server/` directory.
2. Perform the following:
  - If PGX service is to be installed on the same server where Compliance Studio is installed, extract the `pgx-server-<version>.zip` file.
  - If PGX service is to be installed on a different server, follow these steps:
    - Copy the `pgx-server-<version>.zip` file to the PGX server.
    - Extract the `pgx-server-<version>.zip` file.

**NOTE**

The path where the `pgx-server-<version>.zip` file is unzipped is referred to as `<PGX_HOME>`.

3. Navigate to the `<PGX_HOME>/pgx-server/conf` directory.

**NOTE**

Configure the following properties if applicable:

In the `server.conf` file, configure the following properties:

- **enable\_tls: false,**
- `enable_client_authentication: false`
- The property value is true by default, which means that the SSL certificate is enabled and recommended. Change to false only if you do not have the SSL certificate enabled.

4. Replace the following Kerberos Files in the `<PGX_HOME>/pgx-server/conf/kerberos` directory:

`krb5.conf`

keytab file name as mentioned in the `config.sh` file.

**NOTE**

**For upgrade scenario:** Use files from the previous version of CS/FCC studio.

5. Replace the following Hadoop configuration files in the `<PGX_HOME>/pgx-server/conf/hadoop_cluster` directory:

- `core-site.xml`
- `hadoop-env.sh`
- `hdfs-site.xml`
- `log4j.properties`
- `ssl-client.xml`
- `topology.map`
- `topology.py`
- `hive-site.xml`
- `yarn-site.xml`
- `redaction-rules.json`
- `hive-env.sh`
- `mapred-site.xml`
- For additional jars, see [Appendix C – Additional Jars – PGX](#) section. Contact your administrator to get the files.

**NOTE**

**For upgrade scenario:** Use files from the previous version of CS/FCC studio.

6. Copy all the obtained jars into `<PGX_HOME>/pgx-server/conf/hdfs_libs` directory.

**NOTE**

**For upgrade scenario:** Use files from the previous version of CS/FCC studio.

7. Navigate to the `<PGX_HOME>/pgx-server/bin` directory and configure the `config.sh` file as described in the [Table 15](#):

**Table 15: config.sh Parameters**

Interaction Variable Name	Significance
<b>PGX Server Memory Configuration</b>	
<code>PGX_SERVER_OFF_HEAP_MB</code>	Indicates the maximum off-heap memory size in megabytes (mainly used for storing graphs except for their string properties) that PGX tries to respect. Recommended Value: 42% of the PGX server memory limit size above.
<code>PGX_SERVER_ON_HEAP_MB</code>	Indicates the maximum and minimum heap memory size (mainly used for storing graphs' string properties) for the Java process of PGX. Recommended Value: 58% of the PGX server memory limit size above.
<code>PGX_SERVER_YOUNG_SPACE_MB</code>	Indicates the amount of young space (new space) configured for the java heap.
<b>Graph Service's SSL certificate details</b>	
<code>STUDIO_SERVER_SSL_FILE_NAME</code>	Indicates the Graph Service SSL file name that is required for HTTPS configuration. For example, <code>studio_server.p12</code>
<code>STUDIO_SERVER_SSL_PASSWORD</code>	Indicates the password for Graph Service Studio Server P12 that is required for HTTPS configuration.
<b>External Service Configuration</b>	
<code>GRAPH_SERVICE_URL</code>	It indicates external service configuration where the Graph service is available. For example, <code>https://&lt;Compliance Studio fully qualified hostname&gt;:7059/graph-service</code>
<code>GRAPH_KEYSTORE_PASSWORD</code>	Indicates the password of the keystore file, which stores the password of the graph schemas.

**Table 15: config.sh Parameters**

<b>Configuration to enable/disable loading graph from HDFS</b>	
LOAD_GRAPH_FROM_HDFS	It is used to enable or disable loading graphs from HDFS. the value 'LOAD_GRAPH_FROM_HDFS' is "true" or "false" For example, LOAD_GRAPH_FROM_HDFS=false <b>NOTE:</b> For Legacy Graph ETL, it is set to true.
<b>Kerberos related configuration</b>	
KERBEROS_TICKET_RENEWAL_PERIOD	For example, 7200 would mean every 2 hours
KERBEROS_PRINCIPAL	For example, USER@PRINCIPAL
KERBEROS_KEYTAB_FILENAME	For example, fccstudio.keytab
KRB5_CONFIG_FILENAME	For example, krb5.conf
<b>Advance Configuration</b>	
SHUTDOWN_GRACE_PERIOD	It indicates the grace period in minutes for the graceful shutdown of the PGX Server. To set value, uncomment and set the value. <b>NOTE:</b> 1. The value should be an integer. 2. If the value is less than 1, then force shutdown is triggered immediately.
KERBEROS_RETRY_TIMEOUT	It indicates the retry timeout in minutes when kerberos ticket generation fails. To set value, uncomment and set the value. <b>NOTE:</b> The value should be an integer.

**NOTE**

- You can generate `Graph-keystore.p12` file after starting the Compliance Studio.
- **For upgrade scenario:** Enter the value of this parameter from the previous version of Compliance Studio `config.sh` file (PGX service). If you are upgrading from 8.0.8.\* to CS 8.1.2.3.0, then update this parameter accordingly.

8. Navigate to the <PGX\_Installation\_Path>/pgx-server/bin directory and run any one of the following commands:

```
./pgx-server.sh -install
```

Or

```
./pgx-server.sh -i
```

**Figure 6: PGX start service**

```
SLF4J: See http://www.slf4j.org/codes.html#multiple_bindings for an explanation.
SLF4J: Actual binding is of type [org.apache.logging.slf4j.Log4jLoggerFactory]
Oct 08, 2021 11:01:34 AM org.apache.coyote.AbstractProtocol init
INFO: Initializing ProtocolHandler ["http-nio-7007"]
Oct 08, 2021 11:01:34 AM org.apache.catalina.core.StandardService startInternal
INFO: Starting service [Tomcat]
Oct 08, 2021 11:01:34 AM org.apache.catalina.core.StandardEngine startInternal
INFO: Starting Servlet engine: [Apache Tomcat/9.0.44]
Oct 08, 2021 11:01:37 AM org.apache.catalina.startup.ContextConfig getDefaultWebXmlFragment
INFO: No global web.xml found
Oct 08, 2021 11:01:54 AM org.apache.jasper.servlet.TldScanner scanJars
INFO: At least one JAR was scanned for TLDs yet contained no TLDs. Enable debug logging for this l
g unneeded JARs during scanning can improve startup time and JSP compilation time.
SLF4J: Class path contains multiple SLF4J bindings.
SLF4J: Found binding in [jar:file:/tmp/pgx_server7325961773484200210/ROOT/WEB-INF/lib/log4j-slf4j-
SLF4J: Found binding in [jar:file:OFS_COMPLIANCE_STUDIO/pg
der.class]
SLF4J: Found binding in [jar:file:OFS_COMPLIANCE_STUDIO/pg
SLF4J: See http://www.slf4j.org/codes.html#multiple_bindings for an explanation.
SLF4J: Actual binding is of type [org.apache.logging.slf4j.Log4jLoggerFactory]
Oct 08, 2021 11:02:20 AM org.apache.coyote.AbstractProtocol start
INFO: Starting ProtocolHandler ["http-nio-7007"]
```

9. Start the PGX service.

To start the PGX service, follow these steps:

- a. Navigate to the path where the PGX service is installed.
- b. Navigate to the following directory where the start service for PGX is located:

```
<PGX_Installation_Path>/pgx-server/bin
```

- c. Run any one of the following commands:

```
./pgx-server.sh --start
```

Or

```
./pgx-server.sh -s
```

10. Stop the PGX service.

To stop the PGX service, run any one of the following commands:

```
./pgx-server.sh --stop
```

Or

```
./pgx-server.sh -k
```

**NOTE** You must run at least one successful ETL batch to start the PGX service with the graph.json file located in the URL GLOBAL GRAPH CONFIG JSON path is present. For more information, see the **Data Movement and Graph Loading for Big Data Environment** section in the [OFS Compliance Studio Administration and Configuration Guide](#).

11. Force stop the PGX service.

To force stop the PGX service, run any one of the following commands:

```
./pgx-server.sh --force-stop
```

Or

```
./pgx-server.sh -f
```

12. Restart the PGX service.
13. Reinstall the PGX service.

To reinstall the PGX service, run any one of the following commands:

```
./pgx-server.sh -reinstall
```

Or

```
./pgx-server.sh -R
```

## 4.19 Run ER in different workspaces

1. The ER Data Schema and Compliance Studio Schema should be in the same wallet. For more information on how to create a wallet, see [Create a wallet for ER schema](#) section.
2. Update the following details for ER schema in the `resources.xml` file. The file can be found in: `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/ficdb/conf`

Example:

```
<Resource
    id="ER2_CSA_ABCD"
    name="jdbc/erdataschema"
    auth="Container"
    type="javax.sql.DataSource"
    driverClassName="oracle.jdbc.OracleDriver"
    url="jdbc:oracle:thin:@ER2_CSA_ABCD"
    connectionProperties= "oracle.net.wallet_location
=<WALLET_PATH/ABCD>;
oracle.net.tns_admin=<WALLET_PATH/ABCD>;"
    maxTotal="5"
    maxIdle="0"
    maxWaitMillis="-1" >
</Resource>
```

### NOTE

Log in as either an SYS user or DBA user and grant these permissions to the ER schema created.

3. Ensure that the pre-staging and output tables are present in the given ER Data Schema.
  - a. The following are the pre-staging table names by version:
    - i. **FSDf 808:**
      - STG\_PARTY\_MASTER\_PRE

- STG\_PARTY\_DETAILS\_PRE
- STG\_PARTY\_EMAIL\_ADDRESS\_PRE
- STG\_PARTY\_ADDRESS\_PRE
- STG\_PARTY\_PHONE\_PRE
- STG\_CUSTOMER\_IDENTIFCTN\_DOC\_PRE

**ii. FSDf 811:**

- STG\_PARTY\_MASTER\_PRE
- STG\_PARTY\_DETAILS\_PRE
- STG\_PARTY\_EMAIL\_MAP\_PRE
- STG\_ADDRESS\_MASTER\_PRE
- STG\_PARTY\_ADDRESS\_MAP\_PRE
- STG\_PARTY\_PHONE\_MAP\_PRE
- STG\_CUSTOMER\_IDENTIFCTN\_DOC\_PRE

**iii. FSDf 812:**

- STG\_PARTY\_MASTER\_PRE
- STG\_PARTY\_DETAILS\_PRE
- STG\_CUSTOMER\_IDENTIFCTN\_DOC\_PRE
- STG\_ADDRESS\_MASTER\_PRE
- STG\_PARTY\_ADDRESS\_MAP\_PRE
- STG\_PARTY\_PHONE\_MAP\_PRE
- STG\_PARTY\_EMAIL\_MAP\_PRE
- FCC\_ER\_MAPPING
- FCC\_ER\_MANUAL\_MAPPING

b. The following are the output table names by version:

**i. FSDf 808:**

- STG\_PARTY\_MASTER
- STG\_PARTY\_DETAILS
- STG\_PARTY\_EMAIL\_ADDRESS
- STG\_PARTY\_ADDRESS
- STG\_PARTY\_PHONE
- STG\_CUSTOMER\_IDENTIFCTN\_DOC
- FCC\_ER\_MAPPING
- FCC\_ER\_OUTPUT

**ii. FSDf 811:**

- STG\_PARTY\_MASTER
- STG\_PARTY\_DETAILS

- STG\_PARTY\_EMAIL\_MAP
- STG\_ADDRESS\_MASTER
- STG\_PARTY\_ADDRESS\_MAP
- STG\_PARTY\_PHONE\_MAP
- STG\_CUSTOMER\_IDENTIFCTN\_DOC
- FCC\_ER\_MAPPING
- FCC\_ER\_OUTPUT

**iii. FSD 812:**

- STG\_PARTY\_MASTER
- STG\_PARTY\_DETAILS
- STG\_PARTY\_EMAIL\_MAP
- STG\_ADDRESS\_MASTER
- STG\_PARTY\_ADDRESS\_MAP
- STG\_PARTY\_PHONE\_MAP
- STG\_CUSTOMER\_IDENTIFCTN\_DOC
- FCC\_ER\_MAPPING
- FCC\_ER\_OUTPUT



## 5 Post-installation Steps when OFSAA is installed

On successful installation of Compliance Studio, you must perform the following post-installation configurations.

**ATTENTION** For the utility shell script and patch for [Security Alert CVE-2021-44228](#), see [Appendix E – Apache Log4j Security Alert CVE-2021-44228 Patch Details](#) section.

### Topics:

- [Verify the Installation](#)
- [Start the PGX Service](#)
- [Access the Compliance Studio Application](#)
- [Perform the OFSAA Configuration for Batch Execution](#)
- [Configure and Run Published Notebooks](#)
- [Importing OOB Graph Definition and related Metadata](#)
- [Mapping Graph Datasource in Compliance Studio Workspace](#)
- [Using Graph Definition](#)

**NOTE** Before running the post-installation steps, an SSH connection to the Big Data server must be configured.

### 5.1 Verify the Installation

To verify the Compliance Studio installation with OFSAA, check the log files in the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/logs` directory. If all the servers are up and running, it indicates that the installation is complete.

**WARNING** If you notice any errors in the log files, do not proceed further. Contact [My Oracle Support \(MOS\)](#) provide the applicable error code and log files.

If the installation of Compliance Studio is unsuccessful, you must reinstall the application after performing the cleanup tasks. For more information, see [Reinstalling Compliance Studio](#).

### 5.2 Start the PGX Service

To start the PGX service, follow these steps:

1. Navigate to the path where the PGX service is installed.
2. Navigate to the following directory where the start service for PGX is located:  
`<PGX_Installation_Path>/pgx-server/bin`
3. Run the following command:

```
./pgx-server.sh --start
```

**NOTE** Make sure to update the correct location of `graph.json` and `csv` files in `config.sh` inside `<PGX Installation Path>/bin` directory before starting the PGX server.

For more information, see the [OFS Compliance Studio Administration and Configuration Guide](#).

## 5.3 Access the Compliance Studio Application

To access Compliance Studio, follow these steps:


1. Enter the URL in the following format in the web browser:

```
https://<Host_Name>:<Port_Number>/cs/home
```

Here `<Port_Number>` is 7001 for the Compliance Studio application installed on-premise.

The Compliance Studio application login page is displayed.

**Figure 7: Compliance Studio Application Login Page**

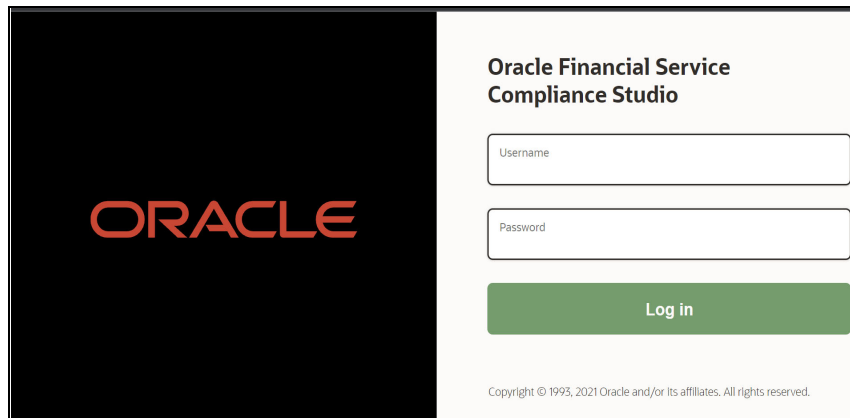

2. Enter the Username and Password.

For Creating Users, Groups, and Mappings in AAI. See [Appendix F – Create Users, Groups, and Mappings](#) section.

3. Click **Login**.

After you access the application, you can view the ready-to-use notebooks. To check if you have been assigned any roles, create a notebook. If you cannot create a notebook, contact [My Oracle Support \(MOS\)](#).

## 5.4 Perform the OFSAA Configuration for Batch Execution

**NOTE**

- This configuration is not applicable for Compliance Studio installed without OFSAA.
- This is deprecated in the current release and will be removed in the future release.

To perform OFSAA configuration for batch execution, follow these steps:

1. Copy the files in the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/ficdb/bin` directory to the server where the BD or ECM pack is installed and to the `$FIC_DB_HOME/bin` directory of the OFSAA setup.
2. Execute the following command to grant Execute permission to the files:  

```
chmod +x <filenames>
```
3. Copy all the files from the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/ficdb/lib` directory into the `$FIC_DB_HOME/lib` directory.

See the [OFS Compliance Studio Administration and Configuration Guide](#) for running Compliance Studio Batches.

## 5.5 Configure and Run Published Notebooks

### NOTE

- This configuration is not applicable for Compliance Studio installed without OFSAA.
- This is deprecated in the current release and will be removed in the future release.

To perform the configuration required to run published notebooks, copy the required `FCCM_Studio_NotebookExecution.sh` file from the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/ficdb/bin` directory into the `<FIC_HOME of OFSAA_Installed_Path>/deployed/ficdb/bin` directory.

For information on running published notebooks, see the Executing Published Notebook section in the [OFS Compliance Studio Administration and Configuration Guide](#).

## 5.6 Importing OOB Graph Definition and related Metadata

After completing the installation of Compliance Studio, you must run the following shell script to import the OOB Graph definition and related metadata:

1. Navigate to `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/ficdb/graph-metadata/bin` directory.
2. Run the following shell-scripts:
  - `InitializeBDSchema.sh`
  - `InitializeGraphSchema.sh`
3. To initialize BD schema, run the following command:  

```
./InitializeBDSchema.sh -bdw <bd_schema_wallet_alias>
```
4. To initialize graph schema, run the following command:  

```
./InitializeGraphSchema.sh -gw <graph_wallet_alias> -bds <bd_schema_name>
```
5. If metadata indices are not available in the Elastic search, then run the following script to load metadata indices:  

```
./CreateMetadataIndexes.sh
```

**NOTE** If `./CreateMetadataIndexes.sh` script is not executed, ensure that `F_IS_RECENTLY_CHANGED` column values are **N** in the `FCC_IDX_M_LOOKUP` table for all the records. For more information, see **Default Data in the tables** section in the [OFS Compliance Studio Administration and Configuration Guide](#).

### 5.6.1 Cleanup Steps when Import Failed in Graph Pipeline

After installation, query the table `FCC_M_PIPELINE_IMPORT_LOG` to check the imported pipeline status. The `_V_IMPORT_STATUS_` column denotes the status and should be 'SUCCESS' for all the imported pipelines.

If any pipelines have the status of 'FAILED,' perform the following steps to reimport:

1. Find the entry for the failed pipeline in the `FCC_M_EXTERNALSERVICE_RUN` table of this `_C_TABLELIST_` column.
2. Remove that entry from the table. If the entry is not there, skip this step.
3. Navigate to `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/mmg-home/mmg-pipeline/pipeline/data-metadata-job-<version>/bin` directory.
4. Run the `import_metadata.sh` shell script using the following command:  

```
./import_metadata.sh
```
5. Once the script is executed, verify the status in the `FCC_M_PIPELINE_IMPORT_LOG` to ensure that the status is a success.

## 5.7 Mapping Graph Datasource in Compliance Studio Workspace

For details, see the **Mapping Graph Datasource** section in the [OFS Compliance Studio User Guide](#).

## 5.8 Using Graph Definition

For details, see **Using Graph Definition** section in the [OFS Compliance Studio User Guide](#).

## 6 Post-installation Steps when OFSAA is Not Installed

On successful installation of Compliance Studio, you must perform the following post-installation configurations.

**ATTENTION** For the utility shell script and patch for [Security Alert CVE-2021-44228](#), see [Appendix E – Apache Log4j Security Alert CVE-2021-44228 Patch Details](#) section.

### Topics:

- [Verify the Installation](#)
- [Start the PGX Service](#)
- [Access the Compliance Studio Application](#)

**NOTE** Before running the post-installation steps, an SSH connection to the Big Data server must be configured.

### 6.1 Verify the Installation

To verify the Compliance Studio installation without OFSAA, check the log files in the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/logs` directory. If all the servers are up and running, it indicates that the installation is complete. Also, ensure all the interpreters are displayed and the JDBC interpreter is working on the Compliance Studio application home page.

**WARNING** If you notice any errors in the log files, do not proceed further. For additional information, see the [Frequently Asked Questions in Compliance Studio](#) section first and [Contact My Oracle Support \(MOS\)](#) provide the applicable error code and log files.

If the installation of Compliance Studio is unsuccessful, you must reinstall the application after performing the cleanup tasks. For more information, see [Reinstalling Compliance Studio](#).

### 6.2 Start the PGX Service

To start the PGX service, follow these steps:

1. Navigate to the path where the PGX service is installed.
2. Navigate to the following directory where the start service for PGX is located:

```
<PGX_Installation_Path>/pgx-server/bin
```

3. Run the following command:

```
./pgx-server.sh --start
```

For more information, see the [OFS Compliance Studio Administration and Configuration Guide](#).

### 6.3 Access the Compliance Studio Application

To access Compliance Studio, follow these steps:


1. Enter the URL in the following format in the web browser:

`https://<Host_Name>:<Port_Number>/cs/home`

Here <Port\_Number> is **7001** for the Compliance Studio application installed on-premise.

The Compliance Studio application login page is displayed.

**Figure 8: Compliance Studio Application Login Page**

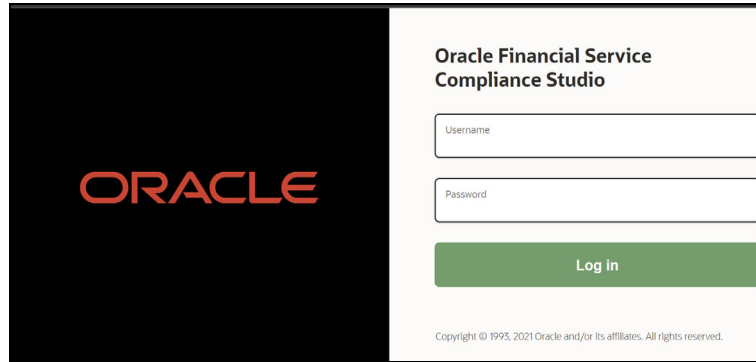

2. Enter the Username and Password.
3. Click Login.

After you access the application, you can view the ready-to-use notebooks. To check if you have been assigned any roles, create a notebook. If you cannot create a notebook, contact [My Oracle Support \(MOS\)](#).

## 7 Upgrade

Follow these steps to upgrade an existing instance of Compliance Studio:

### Topics:

- [Upgrade Steps with OFSAA](#)
- [Pre-Upgrade Steps](#)
- [Additional Upgrade Steps](#)
- [Cleanup for Upgrade](#)
- [Stop the PGX Service](#)
- [Stop the Compliance Studio Installer](#)
- [Upgrade Steps without OFSAA](#)
- [Configure Python Interpreter Setting](#)
- [Configure Interpreters after Upgrade](#)

You can upgrade an existing instance of Compliance Studio as follows:

### Upgrade FCC Studio from v8.0.8.2.0 onwards to Compliance Studio v8.1.2.0.0.

**NOTE** Here, ensure to provide the same BD database, Studio schema, Hive schema, and wallet-related information you used while installing the existing instance Compliance Studio.

### Upgrade FCC Studio from v8.1.1.1.0 onwards to Compliance Studio v8.1.2.0.0.

**NOTE** Here, ensure to provide the same Compliance Studio schema and wallet-related information you used while installing the existing instance of Compliance Studio.

### Customization in Entity Resolution

If any customization is applied before the upgrade, then re-check and evaluate whether these changes are still in place after the upgrade. If changes are not available, re-apply the customization wherever required.

Out-of-the-box rules should not be edited for customizations. If there are any customizations, create a copy of out-of-the-box pipeline definitions to apply any customizations otherwise the customizations will not persist when upgraded.

If out-of-the-box pipeline definitions are modified for any customizations, follow these steps to preserve the customizations:

1. Before upgrade, create a copy of the modified/customized pipeline definitions.
2. Merge the customizations into upgraded out-of-the-box pipeline definitions appropriately after the successful upgrade of Compliance Studio 8.1.2.3.0.

For any clarifications, contact [My Oracle Support \(MOS\)](#).

## 7.1 Upgrade Steps with OFSAA

This section describes generic steps for the upgrade. For specific upgrades, see [Additional Upgrade Steps](#) section.

[Table 16](#) provides the steps to upgrade Compliance Studio with OFSAA.

**Table 16: Upgrade Steps with OFSAA**

Sl. No.	Activity
<b>Pre-installation Steps</b>	
1	<a href="#">Download the Installer Kit</a>
<b>Installation Steps</b>	
1	<a href="#">Extract the Installer Kit</a>
2	<a href="#">Configure the Elastic Search Component</a>
3	<a href="#">Add Synonyms and Stopword files in Elastic Search</a>
4	<a href="#">Place Files in the Installation Directories</a>
5	<a href="#">Generate an Encrypted Password</a>
6	<a href="#">Generate the Public and Private Keys</a>
7	<a href="#">Generate API token for CS API User</a>
8	<a href="#">Place the Key Store File for Secure Batch Service</a>
9	<a href="#">Configure the Extract Transfer and Load (ETL) Process</a>
10	<a href="#">Additional Grants for Studio Schema (See <a href="#">Assign Grants for the Studio Schema</a>)</a>
11	<a href="#">Additional Grants for ER Schema (See <a href="#">Assign Grants for the Studio Schema</a>)</a>
12	<a href="#">Configure the config.sh File</a>
13	<a href="#">Generate the Graph-keystore.p12 File</a>
14	<a href="#">Configure the PGX Service</a>
15	<a href="#">Run the Compliance Studio Installer</a>
<b>Post-Installation Steps</b>	
1	<a href="#">Verify the Installation</a>
2	<a href="#">Additional Upgrade Steps</a>
3	<a href="#">Stop the PGX Service</a>
4	<a href="#">Stop the Compliance Studio Installer</a>
5	<b>Configure the SSH Connection</b> – See <a href="#">OFS Compliance Studio Administration and Configuration Guide</a>



**Table 16: Upgrade Steps with OFSAA**

6	<b>Configure the Schema Creation</b> – See <a href="#">OFS Compliance Studio Administration and Configuration Guide</a> . <b>NOTE:</b> This is applicable only if you want to load a graph using the Legacy ETL, i.e., the Hadoop cluster.
7	<b>Configure the ICIJ Data</b> – See <a href="#">OFS Compliance Studio Administration and Configuration Guide</a> . <b>NOTE:</b> This is applicable only if you want to load a graph using the Legacy ETL, i.e., the Hadoop cluster.
8	<a href="#">Start the PGX Service</a>
9	<a href="#">Configure the Graph Pipeline (For Graph Pipeline)</a>
10	<a href="#">Configure the Entity Resolution (For Entity Resolution)</a>
11	<a href="#">Starting Compliance Studio</a>
12	<a href="#">Access the Compliance Studio Application</a>

## 7.2 Pre-Upgrade Steps

To do pre-upgrade, follow these steps:

1. Stop studio using `./stop-studio.sh` from `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/bin`.
2. Stop pgx server. To stop, see [Stop the PGX Service](#).
3. Configure `config.sh` in `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/bin` path.
4. Use the same HIVE name and Compliance Studio Schema name during configuration.
5. Configure the PGX Service. For more details, see the [Configure the PGX Service](#) section.
6. If there are client specific metadata changes in the `fcc_studio_er_queries` table, then take back-up of the `fcc_studio_er_queries` table in the Studio schema before starting the upgrade process.

## 7.3 Additional Upgrade Steps

This section provides additional steps for upgrade and post-upgrade.

### 7.3.1 Upgrade from 8.0.8.2.0 to 8.1.2.3.0

In case the user is going to use Graph ETL, below are the steps user needs to follow:

1. Drop the tables starting with FCDM, and ICIJ as the prefix in the HIVE schema.
2. Truncate below tables in studio schema:
  - `fcc_studio_graph_entity_provider;`
  - `fcc_studio_etl_connector_log;`
  - `fcc_studio_etl_graph_log;`
  - `fcc_studio_graph_plug_edge_status;`

3. Remove the jars from `<GRAPH_FILES_PATH >/jars` except `elasticsearch-spark-20_2.11-<Version Number> jar`.
4. Copy all the jars from `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/ficdb/etlJars` to `<GRAPH_FILES_PATH >/jars`.
5. To remove `<HDFS_GRAPH_FILES_PATH>`, run the following command:  

```
hadoop fs -rm -r <HDFS_GRAPH_FILES_PATH>
```
6. To configure the Spark interpreter, see the [Configure the Spark Interpreter](#) section.
7. To configure the PySpark interpreter, see the [Configure the PySpark Interpreter](#) section.
8. To change the port numbers after upgrade in the interpreters, see the [Configure Interpreters after Upgrade](#) section.

<b>NOTE</b>	<p>You can use <b>http</b> or <b>https</b> in the command depending upon Elastic search configuration.</p> <p>If existing indices are not replaced in Elastic Search of <b>80820 ETL Batch</b> with new indices, then run the following command to delete existing indices:</p> <pre>curl -XDELETE http://&lt;Elastic Search hostname&gt;:&lt;port&gt;/load-to-elastic-search/idx/deleteIndex/&lt;INDEX NAME&gt;</pre>
-------------	--

### 7.3.1.1 Upgrade Steps

1. Run the below command from `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/bin` path to install the new compliance studio:  

```
./compliance-studio.sh -i
```
2. Run the below command from `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/bin` path to deploy the new compliance studio:  

```
./compliance-studio.sh -s
```

### 7.3.1.2 Post Upgrade Steps

#### 7.3.1.2.1 For Legacy ETL

In case the user is going to use Graph ETL, follow the below steps:

1. Run `FCCM_Studio_SchemaCreation.sh` from `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/ficdb/bin`.
2. Run `FCCM_Studio_SchemaCreation.sh` from `<compliance studio installation-path>/deployed/ficdb/bin` only once.

**WARNING:** Do not modify the following tables;

- `fcc_datastudio_schemaobjects` table in the Studio schema
  - `fcc_orahive_datatypemapping` table in the Atomic Schema
3. Run the Sqoop, ETL Batches, and Graph job.
  4. Start PGX server.

#### 7.3.1.2.2 For Graph Pipeline

To use the Graph pipeline, see the [Importing OOB Graph Definition and related Metadata](#) section.

### 7.3.1.2.3 For Entity Resolution

To configure Entity Resolution, see the [Entity Resolution](#) section.

## 7.3.2 Upgrade from 8.1.1.1.0 to 8.1.2.3.0

### 7.3.2.1 Upgrade Steps

1. Update all the jars in `<GRAPH_FILES_PATH>/jars` from `new compliance studio/` `deployed/ficdb/etlJars`.
2. Run the below command from `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/bin` path to install new compliance studio:  

```
./compliance-studio.sh -i
```
3. Run the below command from `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/bin` path to deploy new compliance studio:  

```
./compliance-studio.sh -s
```
4. Pgx can be brought up using `<compliance studio installation path>/pgx/server/bin`.
5. To configure the Spark interpreter, see the [Configure the Spark Interpreter](#) section.
6. To configure the PySpark interpreter, see the [Configure the PySpark Interpreter](#) section.
7. To change the port numbers after upgrade in the interpreters, see the [Configure Interpreters after Upgrade](#) section.

### 7.3.2.2 Post Upgrade Steps

#### 7.3.2.2.1 For Legacy ETL

In case the user is going to use Graph ETL, follow the below steps:

1. Run `FCCM_Studio_SchemaCreation.sh` from `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/ficdb/bin`.
2. Run `FCCM_Studio_SchemaCreation.sh` from `<compliance studio installation-path>/deployed/ficdb/bin` only once.

WARNING: Do not modify the following tables;

- `fcc_datastudio_schemaobjects` table in the Studio schema
  - `fcc_orahive_datatypemapping` table in the Atomic Schema
3. Run the Sqoop, ETL Batches, and Graph job.
  4. Start PGX server.

#### 7.3.2.2.2 For Graph Pipeline

To use the Graph pipeline, see the [Importing OOB Graph Definition and related Metadata](#) section.

#### 7.3.2.2.3 For Entity Resolution

To configure Entity Resolution, see the [Entity Resolution](#) section.

## 7.3.3 Upgrade from 8.1.2.0.0 to 8.1.2.3.0

### 7.3.3.1 Upgrade Steps

1. Update all the jars in `<GRAPH_FILES_PATH>/jars` from `new compliance studio/ deployed/ ficdb/ etlJars`.
2. Run the below command from `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/bin` path to install new compliance studio:  

```
./compliance-studio.sh -i
```
3. Run the below command from `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/bin` path to deploy new compliance studio:  

```
./compliance-studio.sh -s
```
4. Pgx can be brought up using `<compliance studio installation path>/pgx/server/ bin`.
5. To configure the Spark interpreter, see the [Configure the Spark Interpreter](#) section.
6. To configure the PySpark interpreter, see the [Configure the PySpark Interpreter](#) section.
7. To change the port numbers after upgrade in the interpreters, see the [Configure Interpreters after Upgrade](#) section.

### 7.3.3.2 Post-Upgrade Steps

#### 7.3.3.2.1 For Legacy ETL

In case the user is going to use Graph ETL, follow the below steps:

1. Run `FCCM_Studio_SchemaCreation.sh` from `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/ ficdb/ bin` only once.  
WARNING: Do not modify the following tables;
2. `fcc_datastudio_schemaobjects` table in the Studio schema
3. `fcc_orahive_datatypemapping` table in the Atomic Schema
4. Run the Sqoop and ETL Batches.
5. Start PGX server.

#### NOTE

You can use **http** or **https** in the command depending upon Elastic search configuration.

If existing indices are not replaced in Elastic Search of **<Previous version of Compliance Studio> ETL Batch** with new indices, then run the following command to delete existing indices:

```
curl -XDELETE http://<Elastic Search hostname>:<port>/load-to-elastic-search/idx/deleteIndex/<INDEX NAME>
```

#### 7.3.3.2.2 For Graph Pipeline

To use the Graph pipeline, see the [Importing OOB Graph Definition and related Metadata](#) section.

#### 7.3.3.2.3 For Entity Resolution

To configure Entity Resolution, see the [Entity Resolution](#) section.

## 7.3.4 Upgrade from 8.1.2.0.1 to 8.1.2.3.0

### 7.3.4.1 Upgrade Steps

1. Update all the jars in `<GRAPH_FILES_PATH>/jars` from `new compliance studio/ deployed/ ficdb/ etlJars`.
2. Run the below command from `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/bin` path to install new compliance studio:  
`./compliance-studio.sh -i`
3. Run the below command from `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/bin` path to deploy new compliance studio:  
`./compliance-studio.sh -s`
4. Pgx can be brought up using `<compliance studio installation path>/pgx/server/ bin`.
5. To configure the Spark interpreter, see the [Configure the Spark Interpreter](#) section.
6. To configure the PySpark interpreter, see the [Configure the PySpark Interpreter](#) section.
7. To change the port numbers after upgrade in the interpreters, see the [Configure Interpreters after Upgrade](#) section.

### 7.3.4.2 Post-Upgrade Steps

#### 7.3.4.2.1 For Legacy ETL

In case the user is going to use Graph ETL, follow the below steps:

1. Run `FCCM_Studio_SchemaCreation.sh` from `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/ ficdb/ bin` only once.  
WARNING: Do not modify the following tables;
  2. `fcc_datastudio_schemaobjects` table in the Studio schema
  3. `fcc_orahive_datatypemapping` table in the Atomic Schema
4. Run the Sqoop and ETL Batches.
5. Start PGX server.

**NOTE** You can use **http** or **https** in the command depending upon Elastic search configuration.

If existing indices are not replaced in Elastic Search of **<Previous version of Compliance Studio> ETL Batch** with new indices, then run the following command to delete existing indices:

```
curl -XDELETE http://<Elastic Search hostname>:<port>/load-to-elastic-search/idx/deleteIndex/<INDEX NAME>
```

#### 7.3.4.2.2 For Graph Pipeline

To use the Graph pipeline, see the [Importing OOB Graph Definition and related Metadata](#) section.

#### 7.3.4.2.3 For Entity Resolution

To configure Entity Resolution, see the [Entity Resolution](#) section.

### 7.3.5 Upgrade Steps for Graph Pipeline from 8.1.2.1.0 to 8.1.2.3.0

To re-import pipelines while upgrading from 81210 to 81230, follow these steps:

1. Contact [My Oracle Support](#) to download the zip file (bug id: **35031234**).
2. Unzip the `DPS_to_Reimport.zip` file.
3. Delete the Account, Customer, and Derived Entity pipelines from the existing installation.
  - a. Run the below API by replacing the pipeline id of the Account, Customer, and Derived Entity pipelines.  
Request Type: GET  
Request URL: `http://<COMPLIANCE_STUDIO_SERVER_HOSTNAME>:18004/pipelineservice/PIPELINE/DELETEPIPELINE?pipelineid=<PIPELINE_ID>`
  - b. Pipeline ID can be obtained from the `fcc_m_pipeline` table in the Studio schema.
  - c. After running the API, the status will be changed to **X** in the `f_status` column of the `fcc_m_pipeline` table.

**NOTE** The `f_status` column in the `fcc_m_pipeline` table will be changed to **X** for the deleted pipelines.

4. Delete records from the `fcc_m_externalservice_run` table in the Studio schema.
  - a. Query the table `fcc_m_externalservice_run` and remove the entries for Account, Customer, and Derived Entity.
5. Upload the new pipeline definition JSON as follows:
  - a. Open following URL in the browser.  
`https://<COMPLIANCE_STUDIO_SERVER_HOSTNAME>:18005/pipelineservice/pmf/dp/AdminScreen.jsp`
  - b. Click the **Upload** button. The **Upload Pipeline** window is displayed.
  - c. Click the **Choose File** button and select the downloaded `AccountNodeGDP_1.json` file.
  - d. Enter the Pipeline Version as **1**.
  - e. Click the **Upload** button. The pipeline is uploaded successfully.
  - f. Similarly, upload the `Customer_1.json` and `DerivedEntityDP_1.json` pipelines. To upload the pipelines, follow the steps 5.b to 5.e.

## 7.4 Cleanup for Upgrade

This section provides cleanup steps for the upgrade.

### 7.4.1 Perform Extract Transfer and Load (ETL) Cleanup

To perform the ETL cleanup, follow these steps:


- Extract the contents of the installer archive file in the download directory using the `unzip -a <Compliance_Studio_Installer_Archive_File>.zip`. The Compliance Studio installer file is extracted in the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>` directory.

- Configure the applicable parameters in the `config.sh` file. For more information, see [Configure the config.sh File](#).
- Generate the keystore file. For more information, see [Generate Compliance Studio Server SSL Configuration Mandatory File](#).
- Generate an encrypted password. For more information, see [Generate an Encrypted Password](#).


## 7.4.2 Perform Cleanup for Templates

**NOTE** This is applicable only if you want to use the new FCGM Default Template. Otherwise, the template will not be updated.

To delete the templates, perform the following:

1. Log in to the Compliance Studio application.
2. Launch the **CS Production** Workspace.
3. Hover the mouse over the **Data Studio Options**  widget and Click **Templates**.  
By default, the Templates page lists all the available templates.  
You can see the following templates among all the templates:
  - FCGM Default Template (default)
  - FCGM Default TemplateYou should delete the **FCGM Default Template** that is without **(default)**.
4. Click the **FCGM Default Template** on the LHS. The default details are displayed on the RHS:

**Figure 9: Template screens**

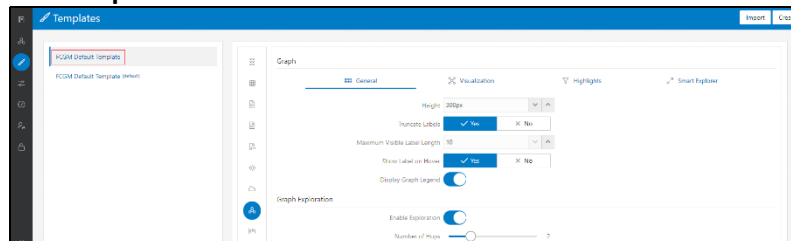


5. Click **Delete** on the RHS. A confirmation message is displayed for deletion.
6. Click **Delete**. The template will be deleted.

### 7.4.3 Perform Cleanup for Interpreters


#### NOTE

- Ensure that the following interpreters are deleted:
  - fcc-jdbc
  - fcc-ore
  - fcc-pyspark
  - fcc-spark-scala
  - fcc-spark-sql
- For 8.1.2.0.0 and later versions, you can rename the fcc interpreter variants in all cases except for the different Python Virtual Environments, so simpler interpreter's names will be used.
- The steps in this section explain removing the fcc versions before installing the generic versions.
- See **Create an Interpreter Variant** in the [OFS Compliance Studio Administration and Configuration Guide](#) on creating new interpreter variants if you want to use the notebooks that use the deleted interpreter name.
- For example, if the notebook has an **fcc-jdbc** paragraph, and these paragraphs' interpreter cannot be replaced with **jdbc**, you can create/clone an interpreter variant of jdbc with the name **fcc-jdbc**.

To delete the interpreter, perform the following:

1. Log in to the Compliance Studio application.
2. Launch the **CS Production** Workspace.
3. Hover the mouse over the **Data Studio Options**  widget and Click **Interpreters**.
4. By default, the Interpreters page lists all the available interpreters.
5. Click the **fcc-jdbc** interpreter on the LHS. The default configured interpreter variant is displayed on the RHS:

**Figure 10: fcc-jdbc interpreter screens**

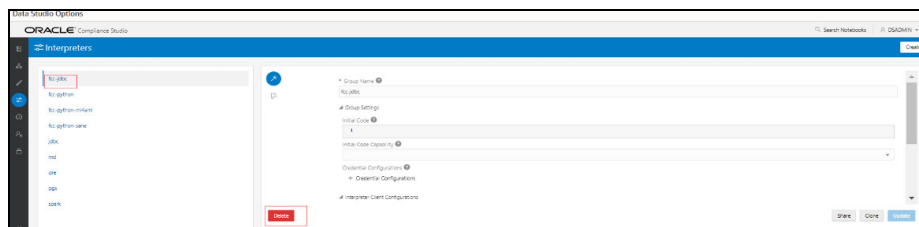

6. Click **Delete** on the RHS. A confirmation message is displayed for deletion.
7. Click **Delete**. The template will be deleted.
8. Repeat the steps **4**, **5**, and **6** for the following interpreters:



- fcc-ore,
- fcc-pyspark,
- fcc-spark-scala
- fcc-spark-sql

#### 7.4.4 Perform Cleanup for Entity Resolution

You can follow the approach based on the following scenario:

In case of resetting Entity Resolution completely, see the **Resetting Entity Resolution Back to Day 0** section in the [OFS Compliance Studio Administration and Configuration Guide](#).

In case of detailed cleanup steps to continue with Entity Resolution, you can contact [My Oracle Support \(MOS\)](#).

### 7.5 Stop the PGX Service

To stop the PGX service, follow these steps:

1. Navigate to the path where the PGX service is installed.
2. Navigate to the following directory where the start service for PGX is located:

```
<PGX_Installation_Path>/pgx/server/bin
```

3. Run `./pgx-server.sh --stop`.

### 7.6 Stop the Compliance Studio Installer

To stop the Compliance Studio installer, follow these steps:

1. Navigate to the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/bin/directory`.
2. Run `./compliance-studio.sh -k`

### 7.7 Upgrade Steps without OFSAA

[Table 17](#) lists the steps to upgrade Compliance Studio without OFSAA.

**Table 17: Upgrade Steps without OFSAA**

Sl. No.	Activity
<b>Pre-installation Steps</b>	
1	Download the Installer Kit
<b>Installation Steps</b>	
1	Extract the Installer Kit
2	Place Files in the Installation Directories
3	Generate an Encrypted Password
4	Generate API token for CS API User

**Table 17: Upgrade Steps without OFSAA**

5	Generate the Public and Private Keys
6	Place the Key Store File for Secure Batch Service
7	Configure the config.sh File
8	Run the Compliance Studio Installer
<b>Post-Installation Steps</b>	
1	Stop the Compliance Studio Installer
2	<b>Add the Python Packages to Compliance Studio</b> - See <a href="#">OFS Compliance Studio Administration and Configuration Guide</a>
3	<b>Configure the SSH Connection</b> – See <a href="#">OFS Compliance Studio Administration and Configuration Guide</a>
4	Starting Compliance Studio
5	Access the Compliance Studio Application

## 7.8 Configure Python Interpreter Setting

To use a python interpreter in an upgraded environment, you need to configure the following:


### **Zeppelin.python:**

```
<COMPLIANCE STUDIO INSTALLATION PATH>/deployed/python-packages/  
defaultVirtualEnv/bin/python3
```


### **Initialization:**

```
import os; os.environ['TNS_ADMIN'] = '<WALLET_LOCATION>';  
from ds_interpreter_client.context.ds_context import PyDataStudioContext  
ds = PyDataStudioContext()
```


To configure, perform the following:

1. Login to the Compliance Studio application.
2. Launch the **CS Production** Workspace.
3. Hover the mouse over the Data Studio Options  widget and Click **Interpreters**.  
By default, the Interpreters page lists all the available interpreters.
4. Click the **fcc-python** interpreter on the LHS. The default configured interpreter variant is displayed on the RHS:

**Figure 11: fcc-python interpreter screens**

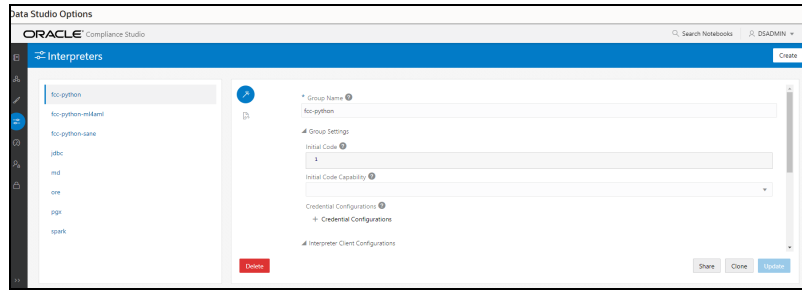

**Figure 12: Interpreters**

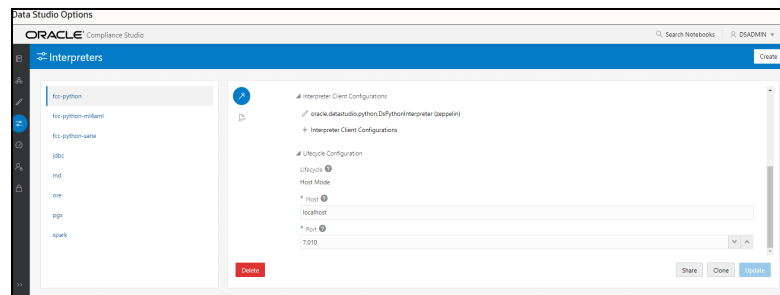

## 7.9 Configure Interpreters after Upgrade

To change the port numbers after upgrade in the interpreters, follow these steps:


1. Navigate to the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/mmg-home/mmg-studio/conf/interpreter-conf/` directory.

The interpreter's `.json` files are available.

For example,


2. Click the `fcc-python.json` file to view the port number which has to be modified in the Compliance Studio application.

To configure interpreters after the upgrade, perform the following:

1. Login to the Compliance Studio application.
2. Launch the **CS Production** Workspace.
3. Hover the mouse over the Data Studio Options  widget and Click **Interpreters**.

By default, the Interpreters page lists all the available interpreters on the LHS.

Figure 13: Port Number Configuration

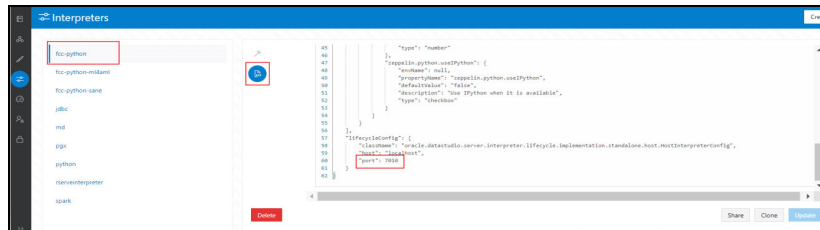

4. Click **fcc-python** interpreter on the LHS and then click **Plain Configuration** on the RHS.
5. Update the port number as per the `fcc-python.json` file.

Similarly, modify all the port numbers available on the Interpreters page with respect to JSON files.

## 8 Reinstall Compliance Studio

If the installation of Compliance Studio is unsuccessful, you must reinstall the application after performing the required cleanup tasks.

To reinstall Compliance Studio, follow these steps:

1. Navigate to the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/bin` directory to update `config.sh` file.
2. Run the following command:  
`./compliance-studio.sh -k` and `./compliance-studio.sh -R`
3. Download and extract the Compliance Studio installer archive file. For more information, see [Download the Installer Kit](#).
4. Perform the database cleanup for the following schemas:

The following table lists Schemas applicable for cleanup

**Table 18: Schemas applicable for cleanup**

Schema	Applicable for Compliance Studio with OFSAA	Applicable for Compliance Studio without OFSAA
Clean up for Compliance Studio Schema	Yes	Yes
Cleanup for BD or ECM Atomic Schema	Yes	No

5. Reinstall Compliance Studio.

### Topics:

- [Clean up for Compliance Studio Schema](#)
- [Cleanup for BD or ECM Atomic Schema](#)

### 8.1 Clean up for Compliance Studio Schema

To clean up the Studio schema, follow these steps:

1. Drop the existing Compliance Studio schema and create a new Studio schema.

**NOTE** The username and password credentials of the Compliance Studio Schema in the wallet files must be updated accordingly. (If applicable)

2. Grant the following permissions to the newly created Oracle Database Schema:

- `GRANT create session to <schema user>;`
- `GRANT create table to <schema user>;`
- `GRANT create view to <schema user>;`
- `GRANT create any trigger to <schema user>;`
- `GRANT create any procedure to <schema user>;`
- `GRANT create sequence to <schema user>;`

- GRANT execute on dbms\_ols to <schema user>;
- GRANT execute on sys.dbms\_session to <schema user>;
- ALTER user <schema user> quota 2000m on <studio tablespace>;

---

**NOTE** Note that the tablespace size can be as per the user's requirement.

- GRANT create sequence to <schema user>;
- GRANT create synonym to <schema user>;
- GRANT execute on dbms\_redefinition to <schema user>;
- GRANT redefine any table to <schema user>;
- GRANT create materialized view to <schema user>;
- GRANT select on sys.v\_\$parameter to <schema user>;
- GRANT select on sys.dba\_free\_space to <schema user>;
- GRANT select on sys.dba\_tables to <schema user>;
- GRANT select on sys.dba\_tab\_columns to <schema user>;
- GRANT create rule to <schema user>;
- GRANT drop any trigger to <schema user>;
- GRANT select on sys.dba\_recyclebin to <schema user>;
- GRANT create job to <schema user>;
- GRANT execute on dbms\_lock to <schema>;
- GRANT execute on dbms\_stats to <studio\_schema name>;

## 8.2 Cleanup for BD or ECM Atomic Schema

To clean up the BD or ECM Atomic schema, follow these steps:

1. Login to the BD or ECM Atomic Schema.
2. Truncate the DATABASECHANGELOG and DATABASECHANGELOGLOCK tables using the following command:

```
TRUNCATE TABLE DATABASECHANGELOGLOCK;
```

```
TRUNCATE TABLE DATABASECHANGELOG;
```

## 9 Appendix A - Change Port Numbers for the Applicable Services

Change the port number in the applicable files as shown in the following sections. And also, update the respective port numbers in the **install.sh** in `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/bin`.

**WARNING** You must re-install and restart Compliance Studio after changing the service(s) with the new port number.

**NOTE** Only follow this if you want to update the port number of the service(s).

### Topics:

- [Server](#)
- [Batchservice and Metaservice](#)
- [Interpreter Service](#)
- [PGX Service](#)
- [Graph Service](#)
- [Matching Service](#)
- [Entity Resolution Service](#)

### 9.1 Server

To change the port number for the server, go to the **application.yml** file in the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/mmg-home/mmg-studio/conf/` directory and edit the following values with the new port, for example, 7008:

- `authserviceUrl: "http://<hostname>:<port>/authservice"`
- `metaserviceUrl: "http://<hostname>:<port>/metaservice"`
- `erserviceUrl: "http://<hostname>:<port>"`
- `batchserviceUrl: "https://<hostname>:<port>/batchservice"`
- `mmgServiceUrl: "https://<hostname>:<port>/cs"`

### 9.2 Batchservice and Metaservice

To change the port number for the Batchserviceserver, go to the `server-config.properties` file in the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/batchservice/conf/` directory and edit the following values with the new port.

- `server.http.port:7043`
- `server.shutdownPort:7044`

Follow this step to make the same changes to the Metaservice server.

### 9.3 Interpreter Service

To change the port number for the Interpreter service, follow these steps:

1. Navigate to the `install.sh` file in the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/bin` directory and edit the port number of the required service.
2. Reinstall and restart the service.

## 9.4 PGX Service

To change the port number for the PGX service, go to the `server.conf` file in the `<PGX installation Path>/server/conf/` directory and update the new port number as **7007**.

## 9.5 Graph Service

To change the port number for the Graph service, go to the `application.yml` file in the `<Compliance Studio installation Path>/graph-service/conf/` directory and update the new port number. By default, it is set as **7059**.

## 9.6 Matching Service

To change the port number for the matching service, go to the `application.yml` file in the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/matching-service/conf` directory and update the new port number as **7049**.

## 9.7 Entity Resolution Service

To change the port number for the entity resolution service, go to the `application.yml` file in the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/entity-resolution/conf` directory and update the new port number **7051**.



## 10 Appendix B – Spark or PySpark Interpreter

This section provides additional details for Spark or PySpark Interpreter.

### Topics:

- [Spark Interpreter User Impersonation](#)
- [Sample spark-default.conf Configuration File](#)

To set up an additional Spark or PySpark interpreter, for example, to connect to two different external clusters at the same time, follow these steps:

1. Create a start-script for the second Spark interpreter.

**NOTE** This is an optional step.

- a. Navigate to the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/interpreters/bin` directory and create a new start-script called `start-spark2-interpreter.sh` using the following command:

```
cp start-spark-interpreter.sh start-spark2-interpreter.sh
```

- b. Edit the `start-spark2-interpreter.sh` file in the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/interpreters/bin/` directory to update:
  - i. Port number to a new port number that is not in use (for example, 7030)
  - ii. Rename the log file, search for the text, `.log` and give a new name to the log (for example, from `spark.log` to `spark2.log`).
- c. Edit the `start-all-interpreters.sh` file in the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/interpreters/bin/` directory as follows:
  - i. Search for the text `sh "$DEPLOY_APP_HOME"/interpreters/bin/start-spark-interpreter.sh &`
  - ii. Add an additional entry with `sh "$DEPLOY_APP_HOME"/interpreters/bin/start-spark2-interpreter.sh &`

**NOTE** For the **2nd Spark** interpreter variant, use `start-spark2-interpreter.sh`, when configuring for a 3rd variant, use as `start-spark3-interpreter.sh` etc.

2. Create the interpreter JSON for the additional Spark interpreter.
  - a. Navigate to the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/interpreters/conf` directory and create the new interpreter JSON called `spark2.json` using the following command:
 

```
cp spark.json spark2.json
```
  - b. Edit the `spark2.json` file in the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/interpreters/conf/` directory as follows:
    - i. Update the following parameter values:
 

```
group: <new-spark-interpreter-name>,
name: <new-spark-interpreter-name>,
groupSettings.initialCodeCapability: <new-spark-interpreter-name>,
```

```

    port: 7030 (the port chosen in the step 1),
    capabilities.name: <new-spark-interpreter-name>,
    capabilities.button.label: <new-spark-interpreter-name>,

```

3. After the update, the file will look like the following:

```

[
  {
    "group": "spark",
    "name": "spark",
    "className": "org.apache.zepplin.spark.SparkInterpreter",
    "groupSettings": {
      "initialCode": "1+1",
      "initialCodeCapability": "spark"
    },
    "host": "localhost",
    "port": 7017,
    "capabilities": [
      {
        "name": "spark",
        "highlightLanguage": "scala",
        "formEscapeCharacter": "@",
        "button": {
          "defaultCode": "println(\"Hello, world\")",
          "icon": "fa fa-fw fa-building-o",
          "label": "Spark"
        }
      }
    ],
    "defaultInterpreter": true,
    "properties": {
      "spark.executor.memory": {
        "envName": null,
        "propertyName": "spark.executor.memory",
        "defaultValue": "",
        "description": "Executor memory per worker instance. ex) 512m,
32g",
        "type": "string"
      }
    }
  }
]

```

```
    },
    "args": {
      "envName": null,
      "propertyName": null,
      "defaultValue": "",
      "description": "spark commandline args",
      "type": "textarea"
    },
    },
    "zeppelin.spark.useHiveContext": {
      "envName": "ZEPPELIN_SPARK_USEHIVECONTEXT",
      "propertyName": "zeppelin.spark.useHiveContext",
      "defaultValue": true,
      "description": "Use HiveContext instead of SQLContext if it is
true.",
      "type": "checkbox"
    },
    },
    "spark.app.name": {
      "envName": "SPARK_APP_NAME",
      "propertyName": "spark.app.name",
      "defaultValue": "Zeppelin",
      "description": "The name of spark application.",
      "type": "string"
    },
    },
    "spark.pyspark.python": {
      "envName": null,
      "propertyName": "spark.pyspark.python",
      "defaultValue": "python3",
      "description": "Python command to run pyspark workers with",
      "type": "string"
    },
    },
    "zeppelin.spark.printREPLOutput": {
      "envName": null,
      "propertyName": "zeppelin.spark.printREPLOutput",
      "defaultValue": true,
      "description": "Print REPL output",
      "type": "checkbox"
    }
  }
}
```

```
    },
    "spark.cores.max": {
      "envName": null,
      "propertyName": "spark.cores.max",
      "defaultValue": "",
      "description": "Total number of cores to use. Empty value uses
all available core.",
      "type": "number"
    },
    "zeppelin.spark.maxResult": {
      "envName": "ZEPPELIN_SPARK_MAXRESULT",
      "propertyName": "zeppelin.spark.maxResult",
      "defaultValue": "1000",
      "description": "Max number of Spark SQL result to display.",
      "type": "number"
    },
    "spark.master": {
      "envName": "MASTER",
      "propertyName": "spark.master",
      "defaultValue": "yarn",
      "description": "Spark master uri. ex) spark://masterhost:7077",
      "type": "string"
    },
    "spark.yarn.archive": {
      "envName": null,
      "propertyName": "spark.yarn.archive",
      "defaultValue": "",
      "description": "An archive containing needed Spark jars for
distribution to the YARN cache",
      "type": "string"
    },
    "spark.driver.bindAddress": {
      "envName": "DRIVER_BIND_ADDRESS",
      "propertyName": "spark.driver.bindAddress",
      "defaultValue": "0.0.0.0",
      "description": "Hostname or IP address where to bind listening
sockets.",
```

```
    "type": "string"
  },
  "zeppelin.spark.enableSupportedVersionCheck": {
    "envName": null,
    "propertyName": "zeppelin.spark.enableSupportedVersionCheck",
    "defaultValue": true,
    "description": "Do not change - developer only setting, not for
production use",
    "type": "checkbox"
  },
  "zeppelin.spark.uiWebUrl": {
    "envName": null,
    "propertyName": "zeppelin.spark.uiWebUrl",
    "defaultValue": "",
    "description": "Override Spark UI default URL",
    "type": "string"
  },
  "zeppelin.spark.useNew": {
    "envName": null,
    "propertyName": "zeppelin.spark.useNew",
    "defaultValue": true,
    "description": "Whether use new spark interpreter
implementation",
    "type": "checkbox"
  },
  "zeppelin.spark.ui.hidden": {
    "envName": null,
    "propertyName": "zeppelin.spark.ui.hidden",
    "defaultValue": false,
    "description": "Whether to hide spark ui in zeppelin ui",
    "type": "checkbox"
  },
  "zeppelin.interpreter.output.limit": {
    "envName": null,
    "propertyName": "zeppelin.interpreter.output.limit",
    "defaultValue": "102400",
```

```

        "description": "Output message from interpreter exceeding the
limit will be truncated",
        "type": "number"
    }
},
"initialCode": [],
"editor": {
    "language": "scala",
    "editOnDbClick": false
}
}
]

```

4. Create the interpreter JSON for the second PySpark interpreter.

- a. Navigate to the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/interpreters/conf` directory and create the new interpreter JSON called `pyspark2.json` using the following command:

```
cp pyspark.json pyspark2.json
```

- b. Edit the `pyspark2.json` file in the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/interpreters/conf/` directory as follows:

- i. Update the following parameter values:

```

group: <new-spark-interpreter-name>,
name: <new-spark-interpreter-name>,
groupSettings.initialCodeCapability: <new-spark-interpreter-name>,
port: 7030 (the port chosen in the step 1),
capabilities.name: <new-spark-interpreter-name>,
capabilities.button.label: <new-spark-interpreter-name>,

```

5. After the update, the file will look like the following:

```

[
  {
    "group": "spark",
    "name": "pyspark",
    "className": "org.apache.zeppelin.spark.PySparkInterpreter",
    "host": "localhost",
    "port": 7017,
    "capabilities": [
      {
        "name": "pyspark",

```

```
    "highlightLanguage": "python",
    "button": {
      "defaultCode": "print('Hello World')",
      "icon": "icon-python",
      "label": "PySpark"
    },
    "formEscapeCharacter": "$"
  }
],
"properties": {
  "zeppelin.pyspark.python": {
    "envName": "PYSPARK_PYTHON",
    "propertyName": null,
    "defaultValue": "python3",
    "description": "Python executable to run pyspark with",
    "type": "string"
  },
  "zeppelin.pyspark.useIPython": {
    "envName": null,
    "propertyName": "zeppelin.pyspark.useIPython",
    "defaultValue": false,
    "description": "whether use IPython when it is available",
    "type": "checkbox"
  },
  "zeppelin.interpreter.output.limit": {
    "envName": null,
    "propertyName": "zeppelin.interpreter.output.limit",
    "defaultValue": "102400",
    "description": "Output message from interpreter exceeding the
limit will be truncated",
    "type": "number"
  }
},
"initialCode": []
}
```

**NOTE** If you try to connect two interpreters to different external clusters when setting the environment variables, `SPARK_HOME` and `HADOOP_CONF_DIR`, as part of providing custom Spark libraries in Yarn Mode, ensure that you append the environment variables to the respective Spark interpreter start-scripts.

- Restart Compliance Studio. To do this, navigate to the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/bin/` directory and run the `./compliance-studio.sh -restart` or `./compliance-studio.sh -r script`

## 10.1 Spark Interpreter User Impersonation

Configure the Spark cluster and Studio to allow proxy users.

Add the below properties and values in `core-site.xml` in the Spark cluster as well as Studio and restart the Spark cluster and Studio:

```
<property>
  <name>hadoop.proxyuser.zepelin.groups</name>
  <value>*</value>
</property>
<property>
  <name>hadoop.proxyuser.zepelin.hosts</name>
  <value>*</value>
</property>
```

Configure the Spark interpreter to run the `spark-submit` job as the currently logged-in user.

Add the below property in `spark.json`:

```
"zeppelin.spark.run.asLoginUser": {
  "envName": null,
  "propertyName": "zeppelin.spark.run.asLoginUser",
  "defaultValue": true,
  "description": "Whether run spark job as the zeppelin login user, it is only applied when running spark job in hadoop yarn cluster and shiro is enabled",
  "type": "checkbox"
}
```

**NOTE** There will be only a single keytab used by all Spark interpreter runs.

## 10.2 Sample spark-default.conf Configuration File

Here is the sample code block for creating `spark-default.conf` file:



```
spark.driver.port 30303

spark.blockManager.port 31313

spark.driver.bindAddress 0.0.0.0

spark.yarn.dist.files <COMPLIANCE STUDIO INSTALLTION PATH>/deployed/mmg-home/
mmg-studio/interpreter-server/spark-interpreter-<version>/extralibs/spark-
<version>-bin-hadoop<version>/python/lib/pyspark.zip,<COMPLIANCE STUDIO
INSTALLTION PATH>/deployed/mmg-home/mmg-studio/interpreter-server/spark-
interpreter-<version>/extralibs/spark-<version>-bin-hadoop<version>/python/
lib/py4j-0.10.7-src.zip

spark.executorEnv.PYTHONPATH pyspark.zip:py4j-0.10.7-src.zip

spark.driver.defaultJavaOptions "-Dsun.security.krb5.debug=false -
Djavax.security.auth.useSubjectCredsOnly=false -
Djava.security.krb5.conf=<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/
batchservice/user/conf/krb5.conf"

spark.driver.host <FQDN_HOSTNAME>

spark.yarn.keytab <COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/
batchservice/user/conf/fccstudio.keytab

spark.yarn.principal <KRBS_PRINCIPAL>

spark.yarn.kerberos.relogin.period 1m
```

**NOTE**

- **FQDN\_HOSTNAME** stands for compliance Studio Fully Qualified hostname, and **KRBS\_PRINCIPAL** stands for Kerberos principal.
- For example, the Spark version is **spark-2.4.0-bin-hadoop2.7**.

# 11 Frequently Asked Questions (FAQs) and Error Dictionary

This section consists of resolutions to the frequently asked questions and error codes noticed during the Compliance Studio installation.

## Topics:

- [Frequently Asked Questions in Compliance Studio](#)

The Compliance Studio installer performs all the pre-requisite validation checks during installation. Any error encountered in the process is displayed with an appropriate Error Code. You can refer to the Error Dictionary to find the exact cause and resolution to rectify the error.

## 11.1 Frequently Asked Questions in Compliance Studio

You can refer to the Frequently Asked Questions, which are developed with interest to help you resolve some of the Compliance Studio Installation and configuration issues. This intends to share problem resolution knowledge to a few of the known issues. This is not an official support document and just attempts to share problem resolution knowledge to a few known issues.

1. Why does my console show an unsuccessful message during wallet creation?

You can check if you have run the following commands correctly. For more information on wallet creation, see [Setup Password Stores with Oracle Wallet](#).

- a. `mkstore -wrl <wallet_location> -create //creates a wallet in the specified location`
- b. `mkstore -wrl <wallet_location> -createCredential <alias-name> <database-user-name> //creates an alias in the studio schema`
- c. `mkstore -wrl <wallet_location> -createCredential <alias-name> <database-user-name> //creates an alias in the atomic schema`
- d. `mkstore -wrl <wallet_location> -createCredential <alias-name> <database-user-name> //creates an alias in the config schema`

If your issue is still not resolved, contact [My Oracle Support \(MOS\)](#).

2. Where can I find my created wallet?

Your wallet will be in the directory you have set as your wallet location.

If your issue is still not resolved, contact [My Oracle Support \(MOS\)](#).

3. When should I create a Database link, and if yes, how do I do it?

Create a Database link to connect the Atomic and Config database schemas to the Studio database schema if the databases are different. You must create the link in the Studio database.

In the following example, a link has been created from the config schema to the atomic schema by running the following script:

```
create public database link <studio database link>
connect to <Config Schema>
identified by password

using ' (DESCRIPTION = ADDRESS_LIST = (ADDRESS = (PROTOCOL = TCP) (HOST
=<host name> (PORT = <port number>)) (CONNECT_DATA = (SERVICE_NAME =
<service name>))) ';
```

```
Config schema : <Config Schema>/password  
' (DESCRIPTION = ADDRESS_LIST = (ADDRESS = (PROTOCOL = TCP) (HOST =<host  
name> (PORT = <port number>)) (CONNECT_DATA = (SERVICE_NAME = <service  
name>))) ';
```

After running the script, run the FCDM connector and ICIJ connector jobs.

4. Why does my installed studio setup not have any notebooks?

Some default notebooks are ready to use when you install Compliance Studio. If you do not see any notebooks when you log in to the application, you may not be assigned any roles. Check the <COMPLIANCE\_STUDIO\_INSTALLATION\_PATH>/deployed/logs directory to see if you have been assigned any roles, and if not, contact your administrator.

If your issue is still not resolved, contact [My Oracle Support \(MOS\)](#).

5. What can I do if the schema creation fails?

If the Atomic schema creation fails, login to the BD and ECM Atomic schemas and run the following query:

```
select * from fcc_orahive_datatypemapping;
```

The `fcc_orahive_datatypemapping` table must not have duplicate data types.

If the Compliance Studio schema creation fails, login as a Studio user and run the following query:

```
select * from fcc_datastudio_schemaobjects
```

Run the following query to replace all Y values with ":

```
update fcc_datastudio_schemaobjects set SCHEMA_OBJ_GENERATED=''
```

After the schema creation is successful, the value of the `SCHEMA_OBJ_GENERATED` attribute changes to Y.

You can also check for errors in the application log file in the <COMPLIANCE\_STUDIO\_INSTALLATION\_PATH>/deployed/logs directory.

If your issue is still not resolved, contact [My Oracle Support \(MOS\)](#).

6. What can I do if the Import\_training\_model batch execution fails?

Batch execution status always displays success in case of success or failure.

You can also check for errors in the application log file in the <COMPLIANCE\_STUDIO\_INSTALLATION\_PATH>/deployed/logs directory.

According to the log details, you can fix the failure and rerun the same batch.

7. Why is the sqoop job not successful?

The Sqoop job may fail if some of the applicable values are null or if the service name or SID value is not provided. Do one of the following:

- Check if there are any null values for the applicable configurations in the `config.sh` and `FCC_DATASTUDIO_CONFIG` tables. If there are any null values, add the required value.
- Check for any errors in the application log file in the <COMPLIANCE\_STUDIO\_INSTALLATION\_PATH>/deployed/logs directory.

If your issue is still not resolved, contact [My Oracle Support \(MOS\)](#).

8. Why am I getting the following error when I run the sqoop job?

```
Error: Could not find or load main class  
com.oracle.ofss.fccm.studio.batchclient.client.BatchExecute
```

Set the `FIC_DB_HOME` path in the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/ficdb` directory.

You can also check for any errors in the application log file in the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/logs` directory.

9. Why is the PGX Server not starting?

The PGX server starts only after the FCDM tables are created after the FCDM connector job is run. Check if all FCDM tables are created, and start the PGX server. You can also check for any errors in the application log file in the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/logs` directory.

If your issue is still not resolved, contact [My Oracle Support \(MOS\)](#).

10. Why is the ICIJ connector job failing?

This can happen because of a missing `csv` file path in the `FCC_STUDIO_ETL_FILES` table. Add the `CSV` file path. You can also check for any errors in the application log file in the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/logs` directory.

If your issue is still not resolved, contact [My Oracle Support \(MOS\)](#).

11. What should I do if there is a below Error while selecting edges in manual Decision UI?

```
java.lang.IllegalStateException: Unable to create  
PgxSessionWrapperjava.lang.IllegalStateException: Unable to create  
PgxSessionWrapper at  
oracle.datastudio.interpreter.pgx.CombinedPgxDriver.getOrCreateSession(C  
ombinedPgxDriver.java:147) at  
oracle.pgx.graphviz.driver.PgxDriver.getGraph(PgxDriver.java:334) at  
oracle.pgx.graphviz.library.QueryEnhancer.createEnhancer(QueryEnhancer.j  
ava:223) at  
oracle.pgx.graphviz.library.QueryEnhancer.createEnhancer(QueryEnhancer.j  
ava:209) at  
oracle.pgx.graphviz.library.QueryEnhancer.query(QueryEnhancer.java:150)  
at  
oracle.pgx.graphviz.library.QueryEnhancer.execute(QueryEnhancer.java:136  
) at  
oracle.pgx.graphviz.interpreter.PgsqlInterpreter.interpret(PgsqlInterprete  
r.java:131) at  
oracle.datastudio.interpreter.pgx.PgxInterpreter.interpret(PgxInterprete  
r.java:120) at  
org.apache.zepplin.interpreter.LazyOpenInterpreter.interpret(LazyOpenIn  
terpreter.java:103) at  
org.apache.zepplin.interpreter.remote.RemoteInterpreterServer$Interpret  
Job.jobRun(RemoteInterpreterServer.java:632) at  
org.apache.zepplin.scheduler.Job.run(Job.java:188) at  
org.apache.zepplin.scheduler.FIFOScheduler$1.run(FIFOScheduler.java:140  
) at java.base/  
java.util.concurrent.Executors$RunnableAdapter.call(Executors.java:515)  
at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:264) at  
java.base/  
java.util.concurrent.ScheduledThreadPoolExecutor$ScheduledFutureTask.run
```

```
(ScheduledThreadPoolExecutor.java:304) at java.base/
java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.jav
a:1128) at java.base/
java.util.concurrent.ThreadPoolExecutor$Worker.run(ThreadPoolExecutor.ja
va:628) at java.base/java.lang.Thread.run(Thread.java:834) Caused by:
java.util.concurrent.ExecutionException:
oracle.pgx.common.auth.AuthorizationException: PgxUser(FCCMDSADMIN) does
not own session 6007f00a-8305-4576-9a56-9fa0f061586f or the session does
not exist code: PGX-ERROR-CQAZPV67UM4H at java.base/
java.util.concurrent.CompletableFuture.reportGet(CompletableFuture.java:
395) at java.base/
java.util.concurrent.CompletableFuture.get(CompletableFuture.java:1999)
at oracle.pgx.api.PgxFuture.get(PgxFuture.java:99) at
oracle.pgx.api.ServerInstance.getSession(ServerInstance.java:670) at
oracle.datastudio.interpreter.pgx.CombinedPgxDriver.getOrCreateSession(C
ombinedPgxDriver.java:145) ... 17 more Caused by:
oracle.pgx.common.auth.AuthorizationException: PgxUser(FCCMDSADMIN) does
not own session 6007f00a-8305-4576-9a56-9fa0f061586f or the session does
not exist code: PGX-ERROR-CQAZPV67UM4H at
oracle.pgx.common.marshalers.ExceptionMarshaler.toUnserializedException(
ExceptionMarshaler.java:107) at
oracle.pgx.common.marshalers.ExceptionMarshaler.unmarshal(ExceptionMarsh
aler.java:123) at
oracle.pgx.client.RemoteUtils.parseExceptionalResponse(RemoteUtils.java:
130) at
oracle.pgx.client.HttpRequestExecutor.executeRequest(HttpRequestExecutor
.java:198) at
oracle.pgx.client.HttpRequestExecutor.get(HttpRequestExecutor.java:165)
at
oracle.pgx.client.RemoteControlImpl$10.request(RemoteControlImpl.java:31
3) at
oracle.pgx.client.RemoteControlImpl$ControlRequest.request(RemoteControl
Impl.java:119) at
oracle.pgx.client.RemoteControlImpl$ControlRequest.request(RemoteControl
Impl.java:110) at
oracle.pgx.client.AbstractAsyncRequest.execute(AbstractAsyncRequest.java
:47) at
oracle.pgx.client.RemoteControlImpl.request(RemoteControlImpl.java:107)
at
oracle.pgx.client.RemoteControlImpl.getSessionInfo(RemoteControlImpl.jav
a:296) at
oracle.pgx.api.ServerInstance.lambda$getSessionInfoAsync$14(ServerInstan
ce.java:490) at java.base/
java.util.concurrent.CompletableFuture.uniComposeStage(CompletableFuture
.java:1106) at java.base/
java.util.concurrent.CompletableFuture.thenCompose(CompletableFuture.jav
a:2235) at oracle.pgx.api.PgxFuture.thenCompose(PgxFuture.java:158)
```

You can perform the following steps as a workaround -

- c. Export the "Manual Decision" Notebook
- d. Add the link parameter just below Description


For example, "link": "manual Decision",

**Figure 14: link parameter**

```
[ {
  "name" : "manual Decision",
  "description" : null,
  "link": "manualDecision",
  "tags" : null,
  "version" : "5",
  "layout" : "zeppelin",
  "type" : "Default",
  "readOnly" : false,
```

- e. Truncate the table "fcc\_er\_paragraph\_manual" in Studio Schema.
  - f. Import the modified notebook again.
12. What should I do when the result set is truncated if the size goes above '102400' bytes?
- a. Perform the following steps:
  - b. Login to Compliance Studio.
  - c. Navigate to interpreter zeppelin.interpreter.output.limit.

**Figure 15: Interpreter zeppelin parameter**

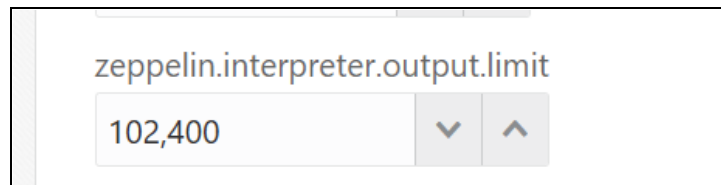

- d. Set the value to the required size.
  - e. Restart the Studio Application.
13. What should I do when the spark interpreter is not working?
- a. Log in to the server where Compliance Studio is installed.
  - b. Navigate to \$SPARK\_HOME directory. If the path is not set, then navigate to <COMPLIANCE\_STUDIO\_INSTALLATION\_PATH>/deployed/mmg-home/mmg-studio/interpreter-server/spark-interpreter-<version>/extralibs directory.
  - c. Export the following environment variables:
 

```
export HADOOP_CONF_DIR=<HADOOP Configuration Directory path>
export SPARK_HOME=<SPARK CLIENT DIRECTORY path>
export SPARK_CONF_DIR=<spark-defaults.conf directory path >
export SPARK_SUBMIT_OPTS="-Djava.security.krb5.conf=<kerberos directory path>/krb5.conf"
```
  - d. Run the following commands for specific cases:
    - The result of the following command should be Pie value. (It ensures that the client is configured successfully.)
 

```
./bin/run-example --master yarn SparkPi 10
```
    - The result of the following command is displayed as a Pie value. (It ensures that the client can successfully connect to the remote cluster

```
./bin/spark-submit --class org.apache.spark.examples.SparkPi --  
master yarn <SPARK_HOME/examples/jars/>/spark-examples_<Ver-  
sion>.jar 10
```

For example, in case of spark 2.11-2.4.0, the command is as follows:

```
./bin/spark-submit --class org.apache.spark.examples.SparkPi --  
master yarn <SPARK_HOME/examples/jars/>/spark-examples_2.11-  
2.4.0.jar 10
```

- The result of the following command displays the list of databases that exist in HIVE.

```
./bin/spark-submit --class org.apache.spark.sql.hive.thrifts-  
erver.SparkSQLCLIDriver --master yarn -e "Show databases"
```

- The result of the following command ensures that the client can query from the HIVE schema.

```
./bin/spark-submit --class org.apache.spark.sql.hive.thrifts-  
erver.SparkSQLCLIDriver --master yarn -e "select * from  
<hiveSchema>.<tableName> limit 10"
```

14. What should I do when you see the following error in the `spark.log` file?

```
Could not find or load main class  
org.apache.spark.deploy.yarn.ExecutorLauncher
```

- Log in to the Compliance Studio.
- Navigate to Interpreter configurations.
- Click on Spark Interpreter.
- The `spark.yarn.dist.archives` field value must be empty.

15. What should I do when you see the following error in the `spark.log` file?

```
INFO client.TransportClientFactory: Successfully created connection to  
after 105 ms (0 ms spent in bootstraps)  
  
Exception in thread "main"  
java.lang.reflect.UndeclaredThrowableException  
at  
org.apache.hadoop.security.UserGroupInformation.doAs (UserGroupInformatio  
n.java:1713)  
at  
org.apache.spark.deploy.SparkHadoopUtil.runAsSparkUser (SparkHadoopUtil.s  
cala:64)  
at  
org.apache.spark.executor.CoarseGrainedExecutorBackend$.run (CoarseGraine  
dExecutorBackend.scala:188)  
at  
org.apache.spark.executor.CoarseGrainedExecutorBackend$.main (CoarseGrain  
edExecutorBackend.scala:281)  
at  
org.apache.spark.executor.CoarseGrainedExecutorBackend.main (CoarseGraine  
dExecutorBackend.scala)  
Caused by: org.apache.spark.rpc.RpcTimeoutException: Futures timed out  
after [120 seconds]. This timeout is controlled by spark.rpc.askTimeout  
at  
org.apache.spark.rpc.RpcTimeout.org$apache$spark$rpc$RpcTimeout$$createR
```

```
pcTimeoutException (RpcTimeout.scala:47)
at
org.apache.spark.rpc.RpcTimeout$$anonfun$addMessageIfTimeout$1.applyOrElse (RpcTimeout.scala:62)
at
org.apache.spark.rpc.RpcTimeout$$anonfun$addMessageIfTimeout$1.applyOrElse (RpcTimeout.scala:58)
at
scala.runtime.AbstractPartialFunction.apply (AbstractPartialFunction.scala:36)
at org.apache.spark.rpc.RpcTimeout.awaitResult (RpcTimeout.scala:76)
at org.apache.spark.rpc.RpcEndpointRef.askSync (RpcEndpointRef.scala:92)
at org.apache.spark.rpc.RpcEndpointRef.askSync (RpcEndpointRef.scala:76)
at
org.apache.spark.executor.CoarseGrainedExecutorBackend$$anonfun$run$1.apply$mcV$sp (CoarseGrainedExecutorBackend.scala:202)
at
org.apache.spark.deploy.SparkHadoopUtil$$anon$2.run (SparkHadoopUtil.scala:65)
at
org.apache.spark.deploy.SparkHadoopUtil$$anon$2.run (SparkHadoopUtil.scala:64)
at java.security.AccessController.doPrivileged (NativeMethod)
at javax.security.auth.Subject.doAs (Subject.java:422)
at
org.apache.hadoop.security.UserGroupInformation.doAs (UserGroupInformation.java:1698)
```

- a. Log in to the Compliance Studio.
  - b. Navigate to Interpreter configurations.
  - c. Click on **Spark Interpreter**.
  - d. The `spark.master` field value must be configured as `yarn`.
  - e. The `spark.master` should not be set in the `spark-default.conf` file.
16. How can I increase the memory of entity resolution and matching services?
- For more information on increasing memory of entity resolution and matching services, see the **Appendix - Setting Memory of Entity Resolution and Matching Services** in the [OFS Compliance Studio Administration and Configuration Guide](#).
17. What should I do when a runtime error occurs while executing a paragraph in Compliance Studio?
- When Compliance Studio is just started (restart/upgrade/fresh installation), every interpreter gives a runtime error for the first time. Re-run the paragraph to get a result.
- In addition, a user with admin privileges has to run a dummy notebook with a simple paragraph of all the used interpreters once.
18. What should I do if I encounter an error on the login?
- If you log in to Compliance Studio for the first time, log out and log back in to resolve the error.
19. How can I retain the logs after restarting the Compliance Studio?
- a. Log in to the Compliance Studio.



- b. Navigate to <COMPLIANCE\_STUDIO\_INSTALLATION\_PATH>/bin directory .
- c. Open the `compliance-studio.sh` file and modify the following for service(s) as per your requirement:

Search with "**\$LOGS\_FOLDER**" text for each service and add > (Greater than) special character and space before the text as specified below:

```
"$DEPLOY_APP_HOME"/<service name>/bin/<service name> >>
"$LOGS_FOLDER"/<service name>.log
```

For example, batchservice, entity-resolution

```
function start_services() {
    service=$1
    case $service in
        batchservice)
            export JAVA_OPTS="-Djavax.net.ssl.trustStore=$DEPLOY_APP_HOME/
mmg-home/mmg-studio/conf/<studio server>
            -Djavax.net.ssl.trustStorePassword=$STUDIO_SERVER_SSL_PASSWORD"
            sh "$DEPLOY_APP_HOME"/batchservice/bin/batchservice >>
"$LOGS_FOLDER"/batchservice.log 2>&1 &
            unset JAVA_OPTS
            ;;
        entity-resolution)
            export JAVA_OPTS=<JAVA Options>
            export ER_LOG_PATH="$COMPLIANCE_STUDIO_INSTALLATION_PATH/
deployed"
            export ER_LOG_LEVEL=INFO
            export LD_LIBRARY_PATH="$COMPLIANCE_STUDIO_INSTALLATION_PATH/
deployed/python-packages/saneVirtualEnv/lib/python<version>/site-
packages/jep:$COMPLIANCE_STUDIO_INSTALLATION_PATH/deployed/python-
packages/saneVirtualEnv/lib/" :$LD_LIBRARY_PATH
            export PATH_ORG=$PATH
            export PATH=$DEPLOY_APP_HOME/python-packages/saneVirtualEnv/
bin:$PATH
            export TNS_ADMIN=$TNS_ADMIN_PATH
            export PYTHONPATH_ORG=$PYTHONPATH
            export PYTHONPATH="$DEPLOY_APP_HOME"/python-packages/
saneVirtualEnv/lib/python<version>/site-packages:$PYTHONPATH_ORG
            sh "$DEPLOY_APP_HOME"/entity-resolution/bin/entity-resolution >>
"$LOGS_FOLDER"/entity-resolution.log &
            unset JAVA_OPTS
            export PATH=$PATH_ORG
            ;;
    esac
}
```

- d. For load to elastic search, you need to add one more > (Greater than) special character as specified below:

```
sh "$DEPLOY_APP_HOME"/load-to-elastic-search/bin/load-to-elastic-search
```

```
>>"$DEPLOY_APP_HOME"/logs/load-to-elastic-search.log &
```

- e. Restart Compliance Studio. To do this, run the following command:

```
./compliance-studio.sh -restart
```

Or

```
./compliance-studio.sh -r script
```

## 20. How to use the system's JDK 11 instead of bundled JDK?

To use the system's JDK 11 instead of bundled JRE in the Compliance Studio, perform the following.

- a. Set Java home as **JAVA11\_HOME** in `.profile` or `.bash_profile`.
- b. Restart Compliance Studio.

---

**NOTE**      **Supported version:** jdk 1.8.0 and 11.0.15

## 21. How to update the bundled JDK version?

Ensure that the Oracle JDK11 should be available in the environment.

Oracle JDK11 versions details, see [Oracle JDK11](#).

- a. Navigate to `<Compliance Studio Installation Path>/mmg-home/mmg-studio/interpreter-server/pgx-interpreter-bundledJRE-<version>/`
- b. Run the following shell-script, **update-jdk.sh**, with **jdk11\_home** and **output\_dir** path:

```
./update-jdk.sh [-j JDK11_HOME ] [-o OUTPUT_DIR]
```

  - `<JDK11_HOME>` specifies the path to the downloaded JDK11
  - `<OUTPUT_DIR>` where the updated interpreter is saved.
- c. Back up **pgx-interpreter-bundledJRE-<version>** folder.
- d. Copy the **pgx-interpreter** generated inside **<OUTPUT\_DIR>** and place it at `<Compliance Studio Installation Path>/mmg-home/mmg-studio/interpreter-server/`
- e. Rename **pgx-interpreter** to **pgx-interpreter-bundledJRE-<version>**.
- f. Install/Re-install Compliance Studio.

---

**NOTE**      **Supported version:** jdk 1.8.0 and 11.0.15

## 22. What should I do if the following error message is displayed while starting Compliance Studio services?

```
Java Memory error: unable to create new native thread
```

The user should perform the following steps:

- a. Login to the Linux server as a root user where Compliance Studio is installed.
- b. Open `/etc/security/limits.conf` file.

- c. Add the following parameters in the file:

```
soft nofile 65536  
hard nofile 65536  
  
<linux username> soft nproc 10240  
  
@svrtech soft memlock 500000  
@svrtech hard memlock 500000
```

- d. Save the file.  
e. Restart the Compliance Studio.

23. What should I do when unable to refresh Graph and fail due to the following error?

```
Failed to load graph '<Graph name>' in PGX server: http://  
<hostname>:7007
```

```
08:22:54.878 [se-nio-7059-exec-1] ERROR  
s.fccm.graphService.service.GraphExecutorService - Failed to refresh PGX  
Graph, <Graph name>, in all PGX servers
```

- a. Stop the PGX server.  
b. Log in to Studio schema.  
c. Delete the entries that are related to the graph in the tables - **fcc\_graph\_m\_config\_json** and **fcc\_pgx\_m\_config**  
d. Start the PGX server.
- a. Re-execute the Batch for the Graph pipeline or Refresh the Graph task. See the **Managing Graph Pipeline** section in the [OFS Compliance Studio User Guide](#).
24. What should I do when the following error message is displayed and the SSL module is unavailable for Linux 8?

```
urllib3.exceptions.SSLError: Can't connect to HTTPS URL because the SSL  
module is not available.
```

During handling of the above expectation, another exception occurred:

- a. Install the **compat-openssl10** module on **Linux 8**.  
b. Log in to the server as a root user where Compliance Studio is installed.  
c. Run the following Shell command:

```
yum -y install compat-openssl10
```

25. What should I do if there is a below error after executing the sqoop job in the batchservice.logs?

```
<22/07/12 14:30:55> ERROR orm.CompilationManager: Could not rename /tmp/  
sqoop-fccstudio/compile/699ae67735142e302f9765c2ea1cd26c/  
DERIVED_ADDRESS.java to /scratch/fccstudio/./DERIVED_ADDRESS.java.  
Error: Destination '/scratch/fccstudio/./DERIVED_ADDRESS.java' already  
exists
```

You can ignore this error after executing the sqoop job.

26. What should I do if there is a below error in the umm-service logs?

```
[29-06-22 07:30:48,095 GMT AM] [INFO ] [WEB] [UMM] [NA]
[GETUSERSESSION] Exception occurred while getting x-auth-token in
initSession method of GetUserSession classjavax.net.ssl.SSLKeyException:
Hostname verification failed:
HostnameVerifier=weblogic.security.utils.SSLWLSHostnameVerifier,
hostname=129.80.90.202.
```

Perform the steps provided in the <https://docs.oracle.com/middleware/1213/wls/WLACH/taskhelp/security/DisableHostNameVerification.html> link.

27. What should I do when upgrading the version JDK 11.0.13 to 11.0.15 using shell script?

To upgrade bundled JDK, perform the following steps:

- a. Use the `wget` command to download `jdk 11.0.15` from the <https://www.oracle.com/java/technologies/javase/jdk11-archive-downloads.html> link.
- b. Change the directory where `mmg-studio` is installed and navigate to `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/mmg-home/mmg-studio/interpreter-server/pgx-interpreter-bundledJRE-<version>`.
- c. Run the `./update-jdk.sh [-j JDK11_HOME ] [-o OUTPUT_DIR]` script. `<JDK11_HOME>` specifies the downloaded `JDK11` path, and `<OUTPUT_DIR>` specifies where the updated interpreter is saved.
- d. Replace the `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/mmg-home/mmg-studio/interpreter-server/pgx-interpreter-bundledJRE-<version>` directory with the `<OUTPUT_DIR>/pgxjava`.

28. What should I do when unable to update the SSO token to the latest value while reinstalling the Compliance Studio?

The user should perform the following steps:

- a. Log in to Studio schema.
- b. Edit the table `NEXTGENEMF_CONFIG` and change the SSO token to the proper value.
- c. Commit the changes.
- d. Restart the Compliance Studio.

29. What should I do if it is a time-out issue observed in the Graph Pipeline?

The user should perform the following steps:

- a. Navigate to `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/mmg-home/mmg-pipeline/pipeline/data-pipeline-service-<version>/conf/application.properties` directory.
- b. Change the value from `1200000` to `120000000` in the `server.jetty.connection-idle-timeout=` property file.
- c. Navigate to `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/mmg-home/mmg-pipeline/pipeline/pipeline-service-<version>/conf/application.properties` directory.
- d. Change the value from `1200000` to `120000000` in the `server.jetty.connection-idle-timeout=` property file.

30. What should I do if there is a below error in the Graph Pipeline?

08/Aug/2022 10:21:26,761- [LoggerConnection] LoggerConnection: Trying to fetch connection for log.

08/Aug/2022 10:21:26,761- [LoggerConnection] LoggerConnection: isJNDI value retrieved is true

08/Aug/2022 10:21:26,769- [LoggerConnection] LoggerConnection: Trying to fetch connection for log.

08/Aug/2022 10:21:26,769- [LoggerConnection] LoggerConnection: isJNDI value retrieved is true

08/Aug/2022 10:21:26,760- [DatabaseLogger] ExecutionLogger: Exception while executing queries

```
java.lang.Exception:
  at
  com.oracle.fccm.amlxe.dataPipelineService.sequencer.impl.SequencerDAOImpl.getQueries(SequencerDAOImpl.java:152) ~[classes!/:?]
  at
  com.oracle.fccm.amlxe.dataPipelineService.sequencer.impl.SequencerDAOImpl$$FastClassBySpringCGLIB$$7e36e608.invoke(<generated>) ~[classes!/:?]
  at
  org.springframework.cglib.proxy.MethodProxy.invoke(MethodProxy.java:218) ~[spring-core-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
  at
  org.springframework.aop.framework.CglibAopProxy$CglibMethodInvocation.invokeJoinpoint(CglibAopProxy.java:771) ~[spring-aop-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
  at
  org.springframework.aop.framework.ReflectiveMethodInvocation.proceed(ReflectiveMethodInvocation.java:163) ~[spring-aop-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
  at
  org.springframework.aop.framework.CglibAopProxy$CglibMethodInvocation.proceed(CglibAopProxy.java:749) ~[spring-aop-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
  at
  org.springframework.dao.support.PersistenceExceptionTranslationInterceptor.invoke(PersistenceExceptionTranslationInterceptor.java:139) ~[spring-tx-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
  at
  org.springframework.aop.framework.ReflectiveMethodInvocation.proceed(ReflectiveMethodInvocation.java:186) ~[spring-aop-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
  at
  org.springframework.aop.framework.CglibAopProxy$CglibMethodInvocation.proceed(CglibAopProxy.java:749) ~[spring-aop-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
  at
  org.springframework.aop.framework.CglibAopProxy$DynamicAdvisedInterceptor
```

```
r.intercept (CglibAopProxy.java:691) ~[spring-aop-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
    at
com.oracle.fccm.amlxe.dataPipelineService.sequencer.impl.SequencerDAOImpl$$EnhancerBySpringCGLIB$$c38b7c42.getQueries (<generated>) ~[classes!/:?]
    at
com.oracle.fccm.amlxe.dataPipelineService.impl.ExecutorDAOImpl.executePipeline (ExecutorDAOImpl.java:247) ~[classes!/:?]
    at
com.oracle.fccm.amlxe.dataPipelineService.impl.ExecutorDAOImpl$$FastClassBySpringCGLIB$$14f27fdb.invoke (<generated>) ~[classes!/:?]
    at
org.springframework.cglib.proxy.MethodProxy.invoke (MethodProxy.java:218) ~[spring-core-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
    at
org.springframework.aop.framework.CglibAopProxy$CglibMethodInvocation.invokeJoinpoint (CglibAopProxy.java:771) ~[spring-aop-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
    at
org.springframework.aop.framework.ReflectiveMethodInvocation.proceed (ReflectiveMethodInvocation.java:163) ~[spring-aop-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
    at
org.springframework.aop.framework.CglibAopProxy$CglibMethodInvocation.proceed (CglibAopProxy.java:749) ~[spring-aop-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
    at
org.springframework.dao.support.PersistenceExceptionTranslationInterceptor.invoke (PersistenceExceptionTranslationInterceptor.java:139) ~[spring-tx-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
    at
org.springframework.aop.framework.ReflectiveMethodInvocation.proceed (ReflectiveMethodInvocation.java:186) ~[spring-aop-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
    at
org.springframework.aop.framework.CglibAopProxy$CglibMethodInvocation.proceed (CglibAopProxy.java:749) ~[spring-aop-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
    at
org.springframework.aop.framework.CglibAopProxy$DynamicAdvisedInterceptor.intercept (CglibAopProxy.java:691) ~[spring-aop-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
    at
com.oracle.fccm.amlxe.dataPipelineService.impl.ExecutorDAOImpl$$EnhancerBySpringCGLIB$$3277859b.executePipeline (<generated>) ~[classes!/:?]
```

```
at
com.oracle.fccm.amlxe.dataPipelineService.services.ExecutorService.executePipeline(ExecutorService.java:154) ~[classes!/:?]
    at sun.reflect.GeneratedMethodAccessor112.invoke(Unknown Source) ~[?:?]
    at
sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) ~[?:1.8.0_321]
    at java.lang.reflect.Method.invoke(Method.java:498) ~[?:1.8.0_321]
    at
org.springframework.web.method.support.InvocableHandlerMethod.doInvoke(InvocableHandlerMethod.java:190) ~[spring-web-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
    at
org.springframework.web.method.support.InvocableHandlerMethod.invokeForRequest(InvocableHandlerMethod.java:138) ~[spring-web-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
    at
org.springframework.web.servlet.mvc.method.annotation.ServletInvocableHandlerMethod.invokeAndHandle(ServletInvocableHandlerMethod.java:105) ~[spring-webmvc-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
    at
org.springframework.web.servlet.mvc.method.annotation.RequestMappingHandlerAdapter.invokeHandlerMethod(RequestMappingHandlerAdapter.java:879) ~[spring-webmvc-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
    at
org.springframework.web.servlet.mvc.method.annotation.RequestMappingHandlerAdapter.handleInternal(RequestMappingHandlerAdapter.java:793) ~[spring-webmvc-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
    at
org.springframework.web.servlet.mvc.method.AbstractHandlerMethodAdapter.handle(AbstractHandlerMethodAdapter.java:87) ~[spring-webmvc-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
    at
org.springframework.web.servlet.DispatcherServlet.doDispatch(DispatcherServlet.java:1040) ~[spring-webmvc-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
    at
org.springframework.web.servlet.DispatcherServlet.doService(DispatcherServlet.java:943) ~[spring-webmvc-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
    at
org.springframework.web.servlet.FrameworkServlet.processRequest(FrameworkServlet.java:1006) ~[spring-webmvc-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
    at
org.springframework.web.servlet.FrameworkServlet.doPost(FrameworkServlet.java:909) ~[spring-webmvc-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
    at javax.servlet.http.HttpServlet.service(HttpServlet.java:652) ~[tomcat-embed-core-9.0.37.jar!/:4.0.FR]
```

```
at
org.springframework.web.servlet.FrameworkServlet.service (FrameworkServlet.java:883) ~[spring-webmvc-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
    at javax.servlet.http.HttpServlet.service (HttpServlet.java:733)
    ~[tomcat-embed-core-9.0.37.jar!/:4.0.FR]
    at
    org.eclipse.jetty.servlet.ServletHolder.handle (ServletHolder.java:755)
    ~[jetty-servlet-9.4.26.v20200117.jar!/:9.4.26.v20200117]
    at
    org.eclipse.jetty.servlet.ServletHandler$CachedChain.doFilter (ServletHandler.java:1617) ~[jetty-servlet-9.4.26.v20200117.jar!/:9.4.26.v20200117]
    at
    org.springframework.web.filter.RequestContextFilter.doFilterInternal (RequestContextFilter.java:100) ~[spring-web-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
    at
    org.springframework.web.filter.OncePerRequestFilter.doFilter (OncePerRequestFilter.java:119) ~[spring-web-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
    at
    org.eclipse.jetty.servlet.ServletHandler$CachedChain.doFilter (ServletHandler.java:1604) ~[jetty-servlet-9.4.26.v20200117.jar!/:9.4.26.v20200117]
    at
    org.springframework.web.filter.FormContentFilter.doFilterInternal (FormContentFilter.java:93) ~[spring-web-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
    at
    org.springframework.web.filter.OncePerRequestFilter.doFilter (OncePerRequestFilter.java:119) ~[spring-web-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
    at
    org.eclipse.jetty.servlet.ServletHandler$CachedChain.doFilter (ServletHandler.java:1604) ~[jetty-servlet-9.4.26.v20200117.jar!/:9.4.26.v20200117]
    at
    org.springframework.boot.actuate.metrics.web.servlet.WebMvcMetricsFilter.doFilterInternal (WebMvcMetricsFilter.java:109) ~[spring-boot-actuator-2.2.6.RELEASE.jar!/:2.2.6.RELEASE]
    at
    org.springframework.web.filter.OncePerRequestFilter.doFilter (OncePerRequestFilter.java:119) ~[spring-web-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
    at
    org.eclipse.jetty.servlet.ServletHandler$CachedChain.doFilter (ServletHandler.java:1604) ~[jetty-servlet-9.4.26.v20200117.jar!/:9.4.26.v20200117]
    at
    org.springframework.web.filter.CharacterEncodingFilter.doFilterInternal (CharacterEncodingFilter.java:201) ~[spring-web-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
    at
    org.springframework.web.filter.OncePerRequestFilter.doFilter (OncePerRequestFilter.java:119) ~[spring-web-5.2.5.RELEASE.jar!/:5.2.5.RELEASE]
```



```
at
org.eclipse.jetty.servlet.ServletHandler$CachedChain.doFilter (ServletHan
dler.java:1604) ~[jetty-servlet-9.4.26.v20200117.jar!/:9.4.26.v20200117]
at
org.eclipse.jetty.servlet.ServletHandler.doHandle (ServletHandler.java:54
5) ~[jetty-servlet-9.4.26.v20200117.jar!/:9.4.26.v20200117]
at
org.eclipse.jetty.server.handler.ScopedHandler.handle (ScopedHandler.java
:143) ~[jetty-server-9.4.26.v20200117.jar!/:9.4.26.v20200117]
at
org.eclipse.jetty.security.SecurityHandler.handle (SecurityHandler.java:5
90) ~[jetty-security-9.4.26.v20200117.jar!/:9.4.26.v20200117]
at
org.eclipse.jetty.server.handler.HandlerWrapper.handle (HandlerWrapper.ja
va:127) ~[jetty-server-9.4.26.v20200117.jar!/:9.4.26.v20200117]
at
org.eclipse.jetty.server.handler.ScopedHandler.nextHandle (ScopedHandler.
java:235) ~[jetty-server-9.4.26.v20200117.jar!/:9.4.26.v20200117]
at
org.eclipse.jetty.server.session.SessionHandler.doHandle (SessionHandler.
java:1607) ~[jetty-server-9.4.26.v20200117.jar!/:9.4.26.v20200117]
at
org.eclipse.jetty.server.handler.ScopedHandler.nextHandle (ScopedHandler.
java:233) ~[jetty-server-9.4.26.v20200117.jar!/:9.4.26.v20200117]
at
org.eclipse.jetty.server.handler.ContextHandler.doHandle (ContextHandler.
java:1297) ~[jetty-server-9.4.26.v20200117.jar!/:9.4.26.v20200117]
at
org.eclipse.jetty.server.handler.ScopedHandler.nextScope (ScopedHandler.j
ava:188) ~[jetty-server-9.4.26.v20200117.jar!/:9.4.26.v20200117]
at
org.eclipse.jetty.servlet.ServletHandler.doScope (ServletHandler.java:485
) ~[jetty-servlet-9.4.26.v20200117.jar!/:9.4.26.v20200117]
at
org.eclipse.jetty.server.session.SessionHandler.doScope (SessionHandler.j
ava:1577) ~[jetty-server-9.4.26.v20200117.jar!/:9.4.26.v20200117]
at
org.eclipse.jetty.server.handler.ScopedHandler.nextScope (ScopedHandler.j
ava:186) ~[jetty-server-9.4.26.v20200117.jar!/:9.4.26.v20200117]
at
org.eclipse.jetty.server.handler.ContextHandler.doScope (ContextHandler.j
ava:1212) ~[jetty-server-9.4.26.v20200117.jar!/:9.4.26.v20200117]
at
org.eclipse.jetty.server.handler.ScopedHandler.handle (ScopedHandler.java
:141) ~[jetty-server-9.4.26.v20200117.jar!/:9.4.26.v20200117]
```

```
at
org.eclipse.jetty.server.handler.HandlerWrapper.handle (HandlerWrapper.java:127) ~[jetty-server-9.4.26.v20200117.jar!/:9.4.26.v20200117]

at org.eclipse.jetty.server.Server.handle (Server.java:500) ~[jetty-server-9.4.26.v20200117.jar!/:9.4.26.v20200117]

at
org.eclipse.jetty.server.HttpChannel.lambda$handle$1 (HttpChannel.java:383) ~[jetty-server-9.4.26.v20200117.jar!/:9.4.26.v20200117]

at org.eclipse.jetty.server.HttpChannel.dispatch (HttpChannel.java:547) [jetty-server-9.4.26.v20200117.jar!/:9.4.26.v20200117]

at org.eclipse.jetty.server.HttpChannel.handle (HttpChannel.java:375) [jetty-server-9.4.26.v20200117.jar!/:9.4.26.v20200117]

at
org.eclipse.jetty.server.HttpConnection.onFillable (HttpConnection.java:270) [jetty-server-9.4.26.v20200117.jar!/:9.4.26.v20200117]

at
org.eclipse.jetty.io.AbstractConnection$ReadCallback.succeeded (AbstractConnection.java:311) [jetty-io-9.4.26.v20200117.jar!/:9.4.26.v20200117]

at org.eclipse.jetty.io.FillInterest.fillable (FillInterest.java:103) [jetty-io-9.4.26.v20200117.jar!/:9.4.26.v20200117]

at
org.eclipse.jetty.io.ssl.SslConnection$DecryptedEndPoint.onFillable (SslConnection.java:543) [jetty-io-9.4.26.v20200117.jar!/:9.4.26.v20200117]

at
org.eclipse.jetty.io.ssl.SslConnection.onFillable (SslConnection.java:398) [jetty-io-9.4.26.v20200117.jar!/:9.4.26.v20200117]

at
org.eclipse.jetty.io.ssl.SslConnection$2.succeeded (SslConnection.java:161) [jetty-io-9.4.26.v20200117.jar!/:9.4.26.v20200117]

at org.eclipse.jetty.io.FillInterest.fillable (FillInterest.java:103) [jetty-io-9.4.26.v20200117.jar!/:9.4.26.v20200117]

at org.eclipse.jetty.io.ChannelEndPoint$2.run (ChannelEndPoint.java:117) [jetty-io-9.4.26.v20200117.jar!/:9.4.26.v20200117]

at
org.eclipse.jetty.util.thread.strategy.EatWhatYouKill.runTask (EatWhatYouKill.java:336) [jetty-util-9.4.26.v20200117.jar!/:9.4.26.v20200117]

at
org.eclipse.jetty.util.thread.strategy.EatWhatYouKill.doProduce (EatWhatYouKill.java:313) [jetty-util-9.4.26.v20200117.jar!/:9.4.26.v20200117]

at
org.eclipse.jetty.util.thread.strategy.EatWhatYouKill.tryProduce (EatWhatYouKill.java:171) [jetty-util-9.4.26.v20200117.jar!/:9.4.26.v20200117]

at
org.eclipse.jetty.util.thread.strategy.EatWhatYouKill.run (EatWhatYouKill.java:129) [jetty-util-9.4.26.v20200117.jar!/:9.4.26.v20200117]
```

```
at
org.eclipse.jetty.util.thread.ReservedThreadExecutor$ReservedThread.run(
ReservedThreadExecutor.java:388) [jetty-util-9.4.26.v20200117.jar!/:
:9.4.26.v20200117]

at
org.eclipse.jetty.util.thread.QueuedThreadPool.runJob(QueuedThreadPool.j
ava:806) [jetty-util-9.4.26.v20200117.jar!/:9.4.26.v20200117]

at
org.eclipse.jetty.util.thread.QueuedThreadPool$Runner.run(QueuedThreadPo
ol.java:938) [jetty-util-9.4.26.v20200117.jar!/:9.4.26.v20200117]

at java.lang.Thread.run(Thread.java:750) [?:1.8.0_321]

08/Aug/2022 10:21:26,786- [LoggerConnection] LoggerConnection: Trying
to fetch connection for log.

08/Aug/2022 10:21:26,786- [LoggerConnection] LoggerConnection: isJNDI
value retrieved is true
```

Re-execute the failed graph pipeline from the scheduler service. To execute the Graph pipeline, see the **Using Scheduler Service** section in the [OFS Compliance Studio User Guide](#).

31. What should I do if there is a below error while executing the ER job 2 - ./ER\_Run\_Bulk\_Similarity\_Job.sh in the matching-service.log?

```
ERROR ss.fccm.matchingservice.service.BulkQueryService - Exception
occurred in bulk processingERROR
ss.fccm.matchingservice.service.BulkQueryService - Exception occurred in
bulk processingjava.lang.IndexOutOfBoundsException: Index 1 out of
bounds for length 1 at
jdk.internal.util.Preconditions.outOfBounds(Preconditions.java:64)
~[?:?] at
jdk.internal.util.Preconditions.outOfBoundsCheckIndex(Preconditions.java
:70) ~[?:?] at
jdk.internal.util.Preconditions.checkIndex(Preconditions.java:248)
~[?:?] at java.util.Objects.checkIndex(Objects.java:372) ~[?:?] at
java.util.ArrayList.get(ArrayList.java:459) ~[?:?] at
com.oracle.ofss.fccm.matchingservice.service.BulkQueryService.preProcess
(BulkQueryService.java:159) [classes!/:?] at
com.oracle.ofss.fccm.matchingservice.controller.BulkUsingApiController2.
executeAsyncBulkQueryMatch(BulkUsingApiController2.java:76) [classes!/:
?] at jdk.internal.reflect.GeneratedMethodAccessor164.invoke(Unknown
Source) ~[?:?] at
jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMetho
dAccessorImpl.java:43) ~[?:?] at
java.lang.reflect.Method.invoke(Method.java:566) ~[?:?] at
org.springframework.web.method.support.InvocableHandlerMethod.doInvoke(I
nvocableHandlerMethod.java:205) [spring-w
```

This error is displayed only when the elastic search index does not have the proper data.

- Fix the data in the pre tables and cleanup the ER schema.
- Re-run the job again. To run the job, see **Perform Matching** section in the [OFS Compliance Studio Administration and Configuration Guide](#).

32. What should I do if interpreter settings are changed after restarting the Compliance Studio?

To retain the interpreter settings, follow these steps:

- a. Navigate to `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/deployed/mmg-home/mmg-studio/conf` directory.
- b. Open the `application.yml` file and change the value of **overwrite-builtin** to **false** in the interpreter parameter.

---

**NOTE** While upgrading Compliance Studio, you should change the value to **true**.

- c. Restart Compliance Studio.

33. How to upgrade the python virtual environment for the fcc-python interpreter?

To upgrade, follow these steps:

- a. Navigate to `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/bin` directory.
- b. Open the `compliance-studio.sh` file and modify the **PYTHONPATH** variable in the default fcc-python interpreter as per your requirement:

For example,

```
export PYTHONPATH=<absolute/path/to/virtual-environment-or-python-  
installation-folder/lib/python<version>>/site-  
packages:$PYTHONPATH_ORG
```

## 12 Appendix C – Additional Jars – PGX

PGX-Server does not include Hadoop-client for reading graphs from HDFS.

**NOTE** This section can be skipped if the deployer intends to use only ready to use sample-graph or PGX server without ETL.

When deploying Studio, you must obtain the following libraries. These libraries can be obtained from your existing big data cluster or the internet. The following list of jars is for **Hadoop-client 3.0.0-cdh6.3.0**. These libraries are referred to as '**hdfs-libs**'.

**NOTE** The following Jar files for your reference. you can use the similar **hdfs-libs** jars based on your Big Data cluster.

Table 19 lists required libraries:

**Table 19: List of libraries**

accessors-smart-1.2.jar	jaxb-api-2.2.11.jar
aopalliance-1.0.jar	jaxb-impl-2.2.3-1.jar
asm-5.0.4.jar	jcip-annotations-1.0-1.jar
avro-1.8.2-cdh6.3.1.jar	jersey-client-1.19.jar
commons-beanutils-1.9.4.jar	jersey-core-1.19.jar
commons-cli-1.2.jar	jersey-guice-1.19.jar
commons-codec-1.11.jar	jersey-json-1.19.jar
commons-collections-3.2.2.jar	jersey-server-1.19.jar
commons-compress-1.18.jar	jersey-servlet-1.19.jar
commons-configuration2-2.11.1.jar	jettison-1.1.jar
commons-io-2.6.jar	jetty-security-9.3.25.v20180904.jar
commons-lang-2.6.jar	jetty-servlet-9.3.25.v20180904.jar
commons-lang3-3.7.jar	jetty-util-9.3.25.v20180904.jar
commons-logging-1.2.jar	jetty-webapp-9.3.25.v20180904.jar
commons-math3-3.1.1.jar	jetty-xml-9.3.25.v20180904.jar
commons-net-3.1.jar	jline-0.9.94.jar
curator-client-2.12.0.jar	json-smart-2.3.jar
curator-framework-2.12.0.jar	jsp-api-2.1.jar
curator-recipes-2.12.0.jar	jsr305-3.0.0.jar

**Table 19: List of libraries**

gson-2.2.4.jar	jsr311-api-1.1.1.jar
guava-16.0.1.jar	kerb-admin-1.0.0.jar
guice-4.0.jar	kerb-client-1.0.0.jar
hadoop-annotations-3.0.0-cdh6.3.1.jar	kerb-common-1.0.0.jar
hadoop-auth-3.0.0-cdh6.3.1.jar	kerb-core-1.0.0.jar
hadoop-client-3.0.0-cdh6.3.1.jar	kerb-crypto-1.0.0.jar
hadoop-common-3.0.0-cdh6.3.1.jar	kerb-identity-1.0.0.jar
hadoop-hdfs-client-3.0.0-cdh6.3.1.jar	kerb-server-1.0.0.jar
hadoop-mapreduce-client-common-3.0.0-cdh6.3.1.jar	kerb-simplekdc-1.0.0.jar
hadoop-mapreduce-client-core-3.0.0-cdh6.3.1.jar	kerb-util-1.0.0.jar
hadoop-mapreduce-client-jobclient-3.0.0-cdh6.3.1.jar	kerby-asn1-1.0.0.jar
hadoop-yarn-api-3.0.0-cdh6.3.1.jar	kerby-config-1.0.0.jar
hadoop-yarn-client-3.0.0-cdh6.3.1.jar	kerby-pkix-1.0.0.jar
hadoop-yarn-common-3.0.0-cdh6.3.1.jar	kerby-util-1.0.0.jar
htrace-core4-4.1.0-incubating.jar	kerby-xdr-1.0.0.jar
httpclient-4.5.3.jar	log4j-1.2.17.jar
httpcore-4.4.6.jar	netty-3.7.0.Final.jar
jackson-annotations-2.9.9.jar	nimbus-jose-jwt-4.41.1.jar
jackson-core-2.9.9.jar	okhttp-2.7.5.jar
jackson-core-asl-1.9.13.jar	okio-1.6.0.jar
jackson-databind-2.9.9.3.jar	paranamer-2.8.jar
jackson-jaxrs-1.9.2.jar	protobuf-java-2.5.0.jar
jackson-jaxrs-base-2.9.9.jar	re2j-1.1.jar
jackson-jaxrs-json-provider-2.9.9.jar	slf4j-api-1.7.25.jar
jackson-mapper-asl-1.9.13-cloudera.1.jar	slf4j-log4j12-1.7.25.jar
jackson-module-jaxb-annotations-2.9.9.jar	snappy-java-1.1.4.jar
jackson-xc-1.9.2.jar	stax2-api-3.1.4.jar
javax.activation-api-1.2.0.jar	woodstox-core-5.0.3.jar
javax.inject-1.jar	xz-1.6.jar
javax.servlet-api-3.1.0.jar	zookeeper-3.4.8.jar

## 13 Appendix D – Additional Jars – Batch Service

When deploying Studio, you must obtain the following files for Batch Service.

**NOTE** The following Jar files for your reference. you can use the similar **hdfs-libs** jars based on your Big Data cluster.

Table 20 lists the required files:

**Table 20: List of Files**

accessors-smart-1.2.jar	jersey-server-1.19.jar
activation-1.1.jar	jersey-servlet-1.19.jar
asm-5.0.4.jar	jettison-1.1.jar
avro-1.8.2-cdh6.3.1.jar	jetty-http-9.3.25.v20180904.jar
commons-beanutils-1.9.4.jar	jetty-io-9.3.25.v20180904.jar
commons-cli-1.2.jar	jetty-security-9.3.25.v20180904.jar
commons-codec-1.11.jar	jetty-server-9.3.25.v20180904.jar
commons-collections-3.2.2.jar	jetty-servlet-9.3.25.v20180904.jar
commons-compress-1.18.jar	jetty-util-9.3.25.v20180904.jar
commons-configuration2-2.11.1.jar	jetty-webapp-9.3.25.v20180904.jar
commons-io-2.6.jar	jetty-xml-9.3.25.v20180904.jar
commons-lang-2.6.jar	jline-0.9.94.jar
commons-lang3-3.7.jar	jsch-0.1.54.jar
commons-logging-1.2.jar	json-smart-2.3.jar
commons-math3-3.1.1.jar	jsp-api-2.1.jar
commons-net-3.1.jar	jsr305-3.0.0.jar
curator-client-2.12.0.jar	jsr311-api-1.1.1.jar
curator-framework-2.12.0.jar	kerb-admin-1.0.0.jar
curator-recipes-2.12.0.jar	kerb-client-1.0.0.jar
gson-2.2.4.jar	kerb-common-1.0.0.jar
guava-16.0.1.jar	kerb-core-1.0.0.jar
hadoop-annotations-3.0.0-cdh6.3.1.jar	kerb-crypto-1.0.0.jar
hadoop-auth-3.0.0-cdh6.3.1.jar	kerb-identity-1.0.0.jar
hadoop-common-3.0.0-cdh6.3.1.jar	kerb-server-1.0.0.jar
hive-exec-1.1.0-cdh5.13.0.jar	kerb-simplekdc-1.0.0.jar
HiveJDBC4.jar	kerb-util-1.0.0.jar
hive-metastore-1.1.0-cdh5.13.0.jar	kerby-asn1-1.0.0.jar

**Table 20: List of Files**

hive-service-11.0-cdh5.13.0.jar	kerby-config-1.0.0.jar
htrace-core4-4.1.0-incubating.jar	kerby-pkix-1.0.0.jar
httpclient-4.5.3.jar	kerby-util-1.0.0.jar
httpcore-4.4.6.jar	kerby-xdr-1.0.0.jar
jackson-annotations-2.9.0.jar	log4j-1.2.17.jar
jackson-core-2.9.9.jar	netty-3.7.0.Final.jar
jackson-core-asl-1.9.13.jar	nimbus-jose-jwt-4.41.1.jar
jackson-databind-2.9.9.3.jar	paranamer-2.8.jar
jackson-jaxrs-1.9.2.jar	protobuf-java-2.5.0.jar
jackson-mapper-asl-1.9.13-cloudera.1.jar	re2j-1.1.jar
jackson-xc-1.9.2.jar	slf4j-api-1.7.25.jar
javax.activation-api-1.2.0.jar	slf4j-log4j12-1.7.25.jar
javax.servlet-api-3.1.0.jar	snappy-java-1.1.4.jar
jaxb-api-2.2.2.jar	stax2-api-3.1.4.jar
jaxb-impl-2.2.3-1.jar	stax-api-1.0-2.jar
jcip-annotations-1.0-1.jar	woodstox-core-5.0.3.jar
jersey-core-1.19.jar	xz-1.6.jar
jersey-json-1.19.jar	zookeeper-3.4.8.jar



## 14 Appendix E – Apache Log4j Security Alert CVE-2021-44228 Patch Details

To address the vulnerability on Apache Log4J v2, [Patch 33684394](#) is released as remediation for a new or upgraded installation of any Compliance Studio Instance.

The patch is based on removing JndiLookup class from the log4j2 jars. To remove this class from the jars in Compliance Studio, perform the following steps:

**NOTE** The following utilities are required to execute the `studio-patch.sh` script.

- bash
- tar
- zip
- unzip
- jar

1. Download the shell-script `studio-patch.sh` from [Patch 33684394](#).
2. Place this shell-script in the Compliance Studio Home directory.
3. Grant execute permission by using the command: `chmod +x studio-patch.sh`.
4. Stop Compliance Studio services (including PGX server).
5. Set `STUDIO_HOME` and execute the shell script, where `STUDIO_HOME` is the path where Studio is installed.  
For example:  

```
/user/studio/OFS_COMPLIANCE_STUDIO
```
6. Set the `STUDIO_HOME` by either of the below options:
  - a. Edit the shell-script to update the path as shown below (as applicable):  

```
export STUDIO_HOME=/user/studio/OFS_COMPLIANCE_STUDIO
```
  - d. While execution (use `./studio-patch.sh`) it will ask for Studio Home. The message will be like this:  

```
STUDIO_HOME path is not set. Please set it.  
Enter the STUDIO_HOME:
```
7. Run `./studio-patch.sh` to execute this shell-script. This will patch the application.
8. Restart Compliance Studio and the PGX server (if applicable).
9. Post-patch Steps:
  - a. Refresh the jars in Big data environments for ETL from `STUDIO_HOME/ficdb/etlJars`.
  - b. If your PGX server is deployed on another server, refresh it with the PGX server from Studio Home and restart.

## 15 Appendix F – Create Users, Groups, and Mappings

This section describes how to create users and groups and map groups to the User.

1. Log in to the OFSAAI application as **SYSADMN** user. The landing page is displayed after successful login. See the **Accessing OFSAA Applications** section in [OFSAAI User Guide](#).
2. Navigate to **Identity Management > User Maintenance**. The Identity Management window is displayed.

For more information on adding, updating, and deleting Users, see the **System Configuration and Identity Management** section in the [OFSAAI User Guide](#).

You can create a new user with the following parameters and select the **EnableUser** and **Login on Holidays** checkboxes:

- User ID
  - UserName
  - Start Date
  - End Date
  - Password
3. Save the changes and then log out.
  4. Log in to the OFSAA application as an **SYSAUTH** user to the Authorize.
  5. Log in to the OFSAA application as an **SYSADMN** user.
  6. Navigate to **Identity Management > User Group Maintenance**.
  7. Create Groups using the following names:
    - SANDBOXADM
    - IDNTYADMIN
    - IDNTYAUTH
    - MDLUSR
    - MDLREV
    - MDLAPPR
    - WKSPADMIN
    - MDLBATCHUSR
    - DSREDACTGRP

See the [OFS Compliance Studio Administration and Configuration Guide](#) for pre-configured Groups in Compliance Studio.

8. Click **User Group Role Map** and map any AAI available role(s) to the above-created groups.
9. Click **User Group Domain Map** and map the groups to any available Domain(s) in AAI to the above-created groups.
10. Save the changes and then log out.

- Log in to the OFSAAI application as **SYSAUTH** user to authorize Groups that are created and log out.

**NOTE** Roles and Domain mapping are required to authorize Groups only in AAI. These mappings are not significant in the Compliance Studio.

- Log in to the OFSAAI application as **SYSADMN** user.
- Navigate to **Identity Management > User-User Group Map**.
- Click on the **User** that is newly created and map the following Groups:
  - SANDBOXADM
  - IDNTYADMN
  - IDNTYAUTH
  - MDLUSR
  - MDLREV
  - MDLAPPR
  - WKSPADMIN
- Save the changes and then log out.
- Login to the OFSAAI application as **SYSAUTH** user to authorize the groups and log out.
- Login to the OFSAAI application as **SYSADMN** user.
- Navigate to **Identity Management > User-User Group Map** to see the Groups mapped to the User.

For example,

The following figure illustrates the Creating of User in AAI

**Figure 16: Creating of User in AAI**

User ID	Name	Profile Name	Start Date	End Date	Enabled
BOADMIN	BOADMIN	Profile for the Administrator	08/17/2020	08/09/2047	Y
CSADMIN1	CSADMIN1	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN2	CSADMIN2	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN3	CSADMIN3	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN4	CSADMIN4	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN5	CSADMIN5	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN6	CSADMIN6	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN7	CSADMIN7	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN8	CSADMIN8	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN9	CSADMIN9	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN10	CSADMIN10	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN11	CSADMIN11	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN12	CSADMIN12	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN13	CSADMIN13	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN14	CSADMIN14	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN15	CSADMIN15	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN16	CSADMIN16	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN17	CSADMIN17	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN18	CSADMIN18	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN19	CSADMIN19	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN20	CSADMIN20	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN21	CSADMIN21	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN22	CSADMIN22	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN23	CSADMIN23	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN24	CSADMIN24	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN25	CSADMIN25	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN26	CSADMIN26	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN27	CSADMIN27	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN28	CSADMIN28	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN29	CSADMIN29	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN30	CSADMIN30	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN31	CSADMIN31	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN32	CSADMIN32	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN33	CSADMIN33	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN34	CSADMIN34	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN35	CSADMIN35	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN36	CSADMIN36	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN37	CSADMIN37	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN38	CSADMIN38	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN39	CSADMIN39	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN40	CSADMIN40	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN41	CSADMIN41	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN42	CSADMIN42	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN43	CSADMIN43	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN44	CSADMIN44	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN45	CSADMIN45	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN46	CSADMIN46	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN47	CSADMIN47	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN48	CSADMIN48	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN49	CSADMIN49	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN50	CSADMIN50	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN51	CSADMIN51	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN52	CSADMIN52	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN53	CSADMIN53	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN54	CSADMIN54	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN55	CSADMIN55	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN56	CSADMIN56	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN57	CSADMIN57	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN58	CSADMIN58	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN59	CSADMIN59	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN60	CSADMIN60	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN61	CSADMIN61	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN62	CSADMIN62	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN63	CSADMIN63	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN64	CSADMIN64	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN65	CSADMIN65	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN66	CSADMIN66	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN67	CSADMIN67	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN68	CSADMIN68	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN69	CSADMIN69	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN70	CSADMIN70	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN71	CSADMIN71	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN72	CSADMIN72	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN73	CSADMIN73	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN74	CSADMIN74	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN75	CSADMIN75	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN76	CSADMIN76	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN77	CSADMIN77	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN78	CSADMIN78	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN79	CSADMIN79	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN80	CSADMIN80	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN81	CSADMIN81	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN82	CSADMIN82	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN83	CSADMIN83	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN84	CSADMIN84	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN85	CSADMIN85	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN86	CSADMIN86	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN87	CSADMIN87	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN88	CSADMIN88	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN89	CSADMIN89	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN90	CSADMIN90	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN91	CSADMIN91	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN92	CSADMIN92	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN93	CSADMIN93	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN94	CSADMIN94	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN95	CSADMIN95	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN96	CSADMIN96	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN97	CSADMIN97	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN98	CSADMIN98	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN99	CSADMIN99	Profile for the Administrator	08/16/2021	08/31/2051	Y
CSADMIN100	CSADMIN100	Profile for the Administrator	08/16/2021	08/31/2051	Y

## 16 Appendix G - Jars for Elastic Search

This section provides jar file details for the elastic search.

The [Table 21](#) lists the required dependencies of the elastic search 7.10.2.

**Table 21: List of Libraries**

aggs-matrix-stats-client-7.10.2.jar	jopt-simple-5.0.2.jar
commons-codec-1.11.jar	lang-mustache-client-7.10.2.jar
commons-logging-1.1.3.jar	lucene-analyzers-common-8.7.0.jar
compiler-0.9.6.jar	lucene-backward-codecs-8.7.0.jar
elasticsearch-7.10.2.jar	lucene-core-8.7.0.jar
elasticsearch-cli-7.10.2.jar	lucene-grouping-8.7.0.jar
elasticsearch-core-7.10.2.jar	lucene-highlighter-8.7.0.jar
elasticsearch-geo-7.10.2.jar	lucene-join-8.7.0.jar
elasticsearch-rest-client-7.10.2.jar	lucene-memory-8.7.0.jar
elasticsearch-rest-high-level-client-7.10.2.jar	lucene-misc-8.7.0.jar
elasticsearch-secure-sm-7.10.2.jar	lucene-queries-8.7.0.jar
elasticsearch-x-content-7.10.2.jar	lucene-queryparser-8.7.0.jar
HdrHistogram-2.1.9.jar	lucene-sandbox-8.7.0.jar
hppc-0.8.1.jar	lucene-spatial3d-8.7.0.jar
httpsyncclient-4.1.4.jar	lucene-spatial-extras-8.7.0.jar
httpClient-4.5.10.jar	lucene-suggest-8.7.0.jar
httpcore-4.4.12.jar	mapper-extras-client-7.10.2.jar
httpcore-nio-4.4.12.jar	parent-join-client-7.10.2.jar
jna-5.5.0.jar	rank-eval-client-7.10.2.jar
joda-time-2.10.4.jar	snakeyaml-1.26.jar
t-digest-3.2.jar	

### 16.1 Download the Elastic Search Jars Using Gradle

**NOTE** This section is applicable only if you have gradle in the system.

You can also download elastic search jars mentioned in the [Table 21](#) effortlessly using gradle as follows:

1. Navigate to `<COMPLIANCE_STUDIO_INSTALLATION_PATH>/ficdb/Utilities/DownloadEsJarBuild` directory.
2. Update the version of the elastic search jar in the `build.gradle` file.

For example, if the elastic search version is 7.10.2, then update the value as follows:

```
def esVersion=7.10.2
```

3. Execute the following command:

```
gradle downloadEsClient
```

The libraries will be downloaded in the `$buildDir/esClientJars/` directory.

**NOTE**

- For more information about gradle installation, see the <https://gradle.org/install/> link.
- The proxy may be required to download jars from maven central or change the repository mentioned in the build.gradle file to the internal maven central repository.

## OFSAA Support

Raise a Service Request (SR) in [My Oracle Support \(MOS\)](#) for queries related to OFSAA applications.

## Send Us Your Comments

Oracle welcomes your comments and suggestions on the quality and usefulness of this publication. Your input is an important part of the information used for revision.

- Did you find any errors?
- Is the information clearly presented?
- Do you need more information? If so, where?
- Are the examples correct? Do you need more examples?
- What features did you like most about this manual?

If you find any errors or have any other suggestions for improvement, indicate the title and part number of the documentation along with the chapter/section/page number (if available) and contact the Oracle Support.

Before sending us your comments, you might like to ensure that you have the latest version of the document wherein any of your concerns have already been addressed. You can access My Oracle Support site which has all the revised/recently released documents.

