

Oracle® Documaker

Enterprise Edition

Installation Guide

12.6.2

Part number: E96926-01

October 2018

Copyright © 2009, 2018, Oracle and/or its affiliates. All rights reserved.

The Programs (which include both the software and documentation) contain proprietary information; they are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright, patent, and other intellectual and industrial property laws. Reverse engineering, disassembly, or decompilation of the Programs, except to the extent required to obtain interoperability with other independently created software or as specified by law, is prohibited.

The information contained in this document is subject to change without notice. If you find any problems in the documentation, please report them to us in writing. This document is not warranted to be error-free. Except as may be expressly permitted in your license agreement for these Programs, no part of these Programs may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose.

If the Programs are delivered to the United States Government or anyone licensing or using the Programs on behalf of the United States Government, the following notice is applicable:

U.S. GOVERNMENT RIGHTS

Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the Programs, including documentation and technical data, shall be subject to the licensing restrictions set forth in the applicable Oracle license agreement, and, to the extent applicable, the additional rights set forth in FAR 52.227-19, Commercial Computer Software--Restricted Rights (June 1987). Oracle USA, Inc., 500 Oracle Parkway, Redwood City, CA 94065.

The Programs are not intended for use in any nuclear, aviation, mass transit, medical, or other inherently dangerous applications. It shall be the licensee's responsibility to take all appropriate fail-safe, backup, redundancy and other measures to ensure the safe use of such applications if the Programs are used for such purposes, and we disclaim liability for any damages caused by such use of the Programs.

The Programs may provide links to Web sites and access to content, products, and services from third parties. Oracle is not responsible for the availability of, or any content provided on, third-party Web sites. You bear all risks associated with the use of such content. If you choose to purchase any products or services from a third party, the relationship is directly between you and the third party. Oracle is not responsible for: (a) the quality of third-party products or services; or (b) fulfilling any of the terms of the agreement with the third party, including delivery of products or services and warranty obligations related to purchased products or services. Oracle is not responsible for any loss or damage of any sort that you may incur from dealing with any third party.

Oracle, JD Edwards, and PeopleSoft are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

Contents

Preface.....	5
Audience	5
Documentation Accessibility	5
Customer Support	5
Contact.....	6
Related Documents.....	7
Overview	8
Product Overview.....	9
Architecture Overview	10
Installation Directories.....	11
Installing ODEE in a Windows Environment	13
Stage 1: Pre-Installation Steps	14
Step A: Checking Requirements	14
Step B: Downloading the Software	16
Stage 2: Running Setup.....	17
Stage 3: Post-Setup.....	23
Running Database Scripts and Loading the MRL	23
Creating the Web Environment.....	29
Step C: Starting Documaker Administrator and Dashboard.....	34
Step D: Starting Documaker Interactive (Optional).....	34
Step E: Final Configuration and Validation	37
Installing ODEE in a UNIX Environment	40
Stage 1: Pre-Installation Steps	41
Step A: Checking Requirements	41
Step B: Downloading the Software	43
Step C: Logging in as root.....	43
Stage 2: Running Setup.....	45
Stage 3: Post-Setup.....	51
Running Database Scripts and Loading the MRL	51
Creating the Web Environment.....	57
Step D: Starting Services	60
Step E: Starting Documaker Administrator and Dashboard.....	61
Step F: Starting Documaker Interactive (Optional)	61
Step G: Final Configuration and Validation	64
Maintaining Your System	67
Changing the Help Location.....	68
Downloading Patches	69

Downloading the Documentation	70
Deinstalling the Software	71
Appendix A	73
Navigating RCU Screens to Create Schemas	73
Appendix B	80
Navigating Configuration Wizard Screens to Configure the Domain	80
Appendix C	88
Certificates	88
Appendix D	89
Legal Notices	89

Preface

This document contains information necessary for the installation and configuration of Oracle Documaker Enterprise onto a server environment. The main components of Oracle Documaker Enterprise are Oracle Documaker Document Factory and Documaker Interactive.

AUDIENCE

This document is intended for users who need to install Document Factory and Documaker Interactive. Familiarity with Oracle Documaker configuration is also beneficial; please see the *ODEE Administration Guide*.

DOCUMENTATION ACCESSIBILITY

Accessibility of Links to External Web Sites in Documentation

This documentation may contain links to Web sites of other companies or organizations that Oracle does not own or control. Oracle neither evaluates nor makes any representations regarding the accessibility of these Web sites.

CUSTOMER SUPPORT

If you have any questions about the installation or use of our products, please call +1.800.223.1711 or visit the My Oracle Support website:

<http://www.oracle.com/us/support/index.html>.

Go to My Oracle Support to find answers in the Oracle Support Knowledge Base, submit, update or review your Service Requests, engage the My Oracle Support Community, download software updates, and tap into Oracle proactive support tools and best practices.

Hearing impaired customers in the U.S. who need to speak with an Oracle Support representative may use a telecommunications relay service (TRS); information about TRS is available at <http://www.fcc.gov/cgb/consumerfacts/trs.html>, and a list of phone numbers is available at <http://www.fcc.gov/cgb/dro/trsphonebk.html>. International hearing impaired customers should use the TRS at 1.605.224.1837.

CONTACT

USA: +1.800.223.1711

Canada: 1.800.668.8921 or +1.905.890.6690

Latin America: 877.767.2253

For other regions including Latin America, Europe, Middle East, Africa, and Asia Pacific regions: Visit- <http://www.oracle.com/us/support/contact/index.html>.

Follow us



<https://blogs.oracle.com/insurance>



<https://www.facebook.com/oraclefs>



<https://twitter.com/oraclefs>



<https://www.linkedin.com/groups?gid=2271161>

RELATED DOCUMENTS

The Oracle Documaker documentation set, specifically:

- Documaker Installation Guide
- Documaker Administration Guide
- Documaker Factory Administration Guide.

To make sure you have the latest documentation, visit the Oracle Technology Network:

<http://www.oracle.com/technetwork/documentation/insurance-097481.html>

Conventions

The following text conventions are used in this document:

Convention	Description
bold	Indicates information you enter.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
<code>monospace</code>	Monospace type indicates commands, URLs, code in examples, and text that appears on the screen.

Tips, Notes, Important Notes and Warnings

- A Tip provides a better way to use the software.
- A Note contains special information and reminders.
- An Important Note contains significant information about the use and understanding of the software.
- A Warning contains critical information that if ignored, may cause errors or result in the loss of information.

Dialog

“Dialog” is the term used to describe windows, screens and other types of user interface elements used to enable reciprocal communication or “dialog” between a computer and its user. It may communicate information to the user, prompt the user for a response, or both.

Chapter 1

Overview

This document describes how to install and configure Oracle Documaker Enterprise onto a server environment.

This chapter includes the following topics:

- *Product Overview* on page 9
- *Architecture Overview* on page 10
- *Installation Directories* on page 11

This table shows you where to go for information on the steps you take to install and maintain Oracle Documaker Enterprise Edition (ODEE):

For information on	Go to
System requirements	Documaker System Requirements Guide
Installing the system on UNIX	<i>Installing ODEE in a UNIX Environment</i>
Installing the system on Windows	<i>Installing ODEE in a Windows Environment</i>
Customizing the location of Help files	<i>Maintaining Your System</i>
Downloading patches	<i>Maintaining Your System</i>
Downloading documentation updates	<i>Maintaining Your System</i>
Uninstalling the software	<i>Deinstalling the Software</i>

PRODUCT OVERVIEW

The main components of Oracle Documaker Enterprise are:

- Oracle Documaker Document Factory
- Oracle Documaker Interactive
- Oracle Documaker Administrator

Oracle Documaker Document Factory

Oracle Documaker Document Factory is a document automation system that applies the assembly line concept from factory production to document production, delivery and system monitoring.

Document Factory includes the Document Factory Dashboard, a web-based application that provides analytics tracking and insight into the jobs being processed within the Document Factory.

Oracle Documaker Interactive


Oracle Documaker Interactive is a workflow-enabled, web-based application that lets you create personalized customer correspondence by choosing content from a pre-approved library of documents graphics and attachments.

Oracle Documaker Administrator

Oracle Documaker Administrator is a web-based application that lets system administrators view and edit Documaker Factory and Documaker Interactive configuration settings, and manage assembly lines.

ARCHITECTURE OVERVIEW

This illustration provides an architectural overview of Documaker Enterprise Edition:

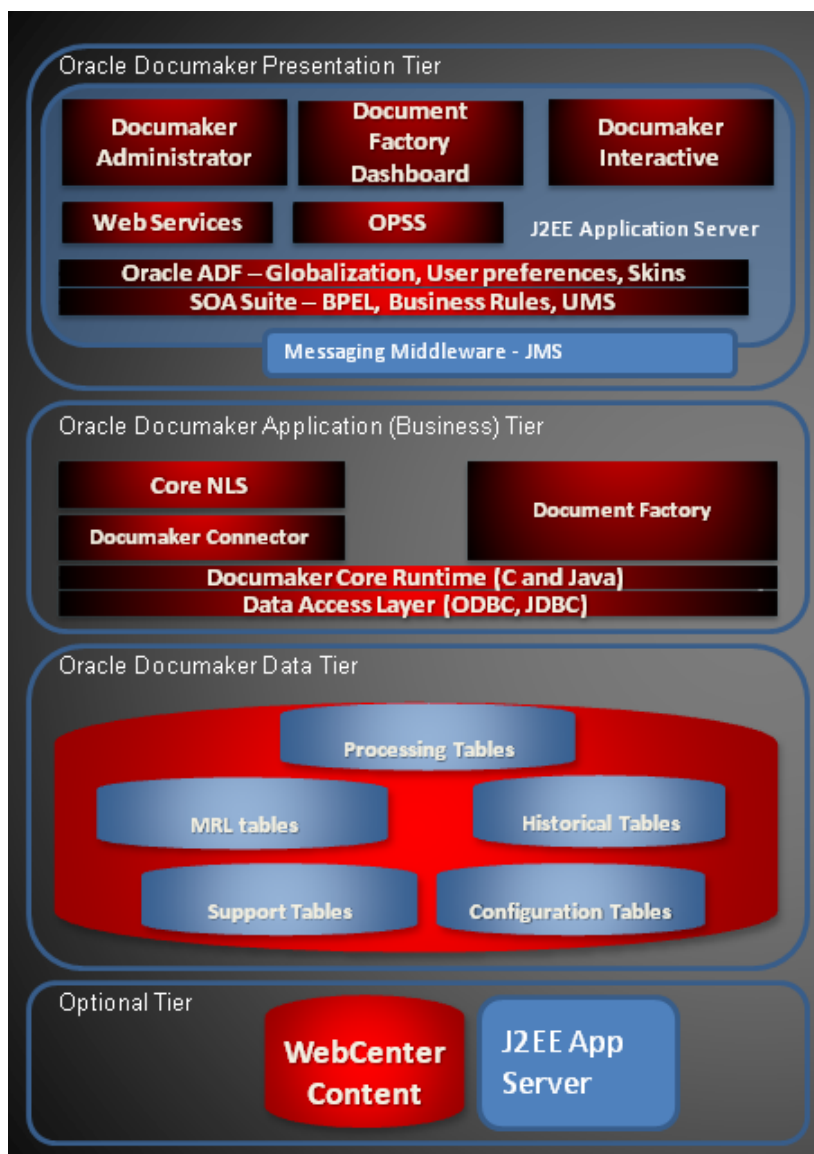

INSTALLATION DIRECTORIES

By default Document Factory, Docupresentment and Shared Objects are installed in the following directory structure.

documaker

This directory contains the following subdirectories and files:

Directory	Description
bin	Contains the DLL, EXE, and shared object files for Documaker server processing. Documaker Studio can be used from this location.
database	Contains the SQL script used during the post-setup process that creates the database tables and sample resources which are used to validate the installation.
docfactory	Contains the DLL, EXE, and Java archive (JAR) files needed for Document Factory processing. The subdirectories are: bin, config, deploy, global, internal-db, lib, logs, and temp. Note: There is a directory for each worker within the temp directory. You can find the log information for each worker in these directories, including worker activity and errors.
docupresentment	The directory where Docupresentment (IDS) is installed. This directory includes many files and subdirectories to support IDS processing. These include DAP.INI, LONGCONF.XML, DOCSERV.XML, WIPEDIT.INI (configure auto/default fields), and the following log and debugging files: DPRTRC.LOG, WATCHDOG-STDERR.TXT, and WATCHDOG-STDOUT.TXT.
filesystem-archive	This is the default location for archived documents when using the file system storage destination.
hotdirectory	This is the default location for archived documents when using the file system storage destination. The Receiver monitors this directory for files that it can accept as jobs into the Document Factory. Set up this directory as a networked or shared directory so it can be accessed by applications that submit jobs into the Document Factory. To change the location of the watched directory, update the Receiver's HotDirectories property within the Documaker Administrator web application after you install it.
j2ee	The parent directory for web applications and J2EEcomponents that support the Document Factory and Documaker Interactive: Correspondence processes. Contains the scripts used to create the required and sample users and groups.
jre	Contains the Java archive (JAR) files and resources needed to run the Document Factory workers.
mstres	Contains the sample resources, including a master resource library and supporting runtime files used with Document Factory and Documaker Interactive: Correspondence.
oracle_instantclient_11_2	(Windows only) This directory contains files used to communicate with the database.

documaker\j2ee

This directory contains the following sub directories and files in the WebLogic directory:

Directory	Description
bpel	The web service Java archive (JAR) files for processing Documaker Interactive: Correspondence requests for approval and rejection. It uses Oracle Business Rules to determine the next step in documents submitted within Documaker Interactive: Correspondence. See the Documaker Enterprise Administration Guide for more information.
dashboard	Contains the enterprise archive (EAR) file for the Document Factory Dashboard web application.
documaker_administrator	Contains the EAR file for the Documaker Administrator web application.
idocumaker_correspondence	Contains the EAR file for the Documaker Interactive: Correspondence web application. Also contains the pass-through web service that can be used to bypass the BPEL approval workflow within Documaker Interactive: Correspondence.
scripts	Contains the command scripts and associated files used to create the required and sample user accounts and establish the WebLogic/ WebSphere domains.

JAR files are used to distribute Java applications or libraries, in the form of Java class files and associated metadata and resources. JAR files are built on the ZIP file format.

An EAR file is a standard JAR file with an *ear* extension, with entries representing the modules of the application, and a metadata directory called META-INF which contains one or more deployment descriptors.

Chapter 2

Installing ODEE in a Windows Environment

This chapter provides detailed information on how to install and configure Oracle Documaker Enterprise Edition (ODEE) in a Windows environment.

The installation process consists of the following stages:

- *Stage 1: Pre-Installation Steps on page 14*
- *Stage 2: Running Setup on page 17*
- *Stage 3: Post-Setup on page 23*

STAGE 1: PRE-INSTALLATION STEPS

Before you install Oracle Documaker Enterprise Edition, make sure you have completed the following steps. Contact the appropriate system administrator for help with web application server details, database, email, and other connection information. You also need to have your users set up in DB2 with passwords, using integrated security.

- *Step A: Checking Requirements on page 14*
- *Step B: Downloading the Software on page 16*

STEP A: CHECKING REQUIREMENTS

1. Make sure you have met the required software and hardware as described in the [Documaker System Requirements Guide](#). This includes having the following:

- An installed database.
 - Oracle database
 - IBM DB2
 - LUW

For DB2, make sure the buffer space and default page size are set to 32K. Also, if the data files are on the same drive as the database executable, DB2 requires an environment variable to be set via a command prompt. Once set, restart the database.

- SQL Server
- An installed web application server.
 - Oracle Fusion Middleware 12c infrastructure 12.2.1.2.0

Note • Fusion Middleware will not install to a path with spaces so WebLogic should be installed in a path without spaces.

- Microsoft Visual C++ Redistributable Package (vc redistrib_x86.exe)
-

Note The installation routine checks for Visual C++ before beginning the installation and attempts to install the necessary run-time components if they are missing. If the installation routine is not able to install these run-time components, you must download and install the latest Microsoft Visual C++ 2013 Redistributable Package (x86) from Microsoft's Download Center:

<http://www.microsoft.com/downloads/>

You can confirm if the necessary Visual C++ run-time components were installed by checking the orainstall*.out log file.

2. Make sure you have the following information available during the installation process:

- The location where you will be installing ODEE. The default installation location is:

`c:\oracle\odee_1`

Note This is the default location unless there is already an ORACLE HOME directory, in which case the default is the existing ORACLE HOME location. The location path cannot contain spaces.

- The display names for the Document Factory System and Assembly Line.
 - The location of the hotfolder directories where extract data files can be picked up by the Document Factory.
3. Make sure you have the necessary the database connection information, including the database host, port, and system ID (SID).
 4. Make sure you have the necessary web application server connection information including the following:

For	Have this information
-----	-----------------------

WebLogic	Protocol, host, port, user (principal) and password (credentials)
----------	---

5. If you will be using email distribution or notifications, make sure you have the necessary connection information including the host, port, user name, password, and default sender address. The username/password comes from the LDAP system.
6. If you will be using Oracle **WebCenter** (formerly known as UCM) for attachments, make sure you have the necessary connection information available including the user name, password, connection string, and document URL.
7. If you will be using Short Message System (SMS) notifications, make sure you have the necessary Unified Messaging Service (UMS) connection information including the user name, password, and endpoint.
8. If you will be using Documaker Interactive: Correspondence option and wish to use Oracle SOA BPEL option to process Approval Workflow, make sure you have deployed SOA BPEL and have the necessary connection information. Later you will deploy the BPEL process and Oracle Business Rules to SOA and can configure Documaker Interactive to use those endpoints for approval workflow.
9. Make sure you have the appropriate communication ports open between the servers and the appropriate permissions and rights on the servers. System components will use the credentials and ports entered during the installation; these ports may be blocked by default on servers with advanced security.

In addition, advanced security settings may prevent even administrative users from writing to some directories. Please contact your system administrator and security staff for confirmation.

10. Make sure you have obtained and configured the necessary certificates to enable communications with secured services.

Note Add a common user group for all Oracle installations so the installer files can be shared and recognized within the installed server. Run the installer as a user within this group.

STEP B: DOWNLOADING THE SOFTWARE

The Oracle Software Delivery Cloud (OSDC) site lets you download Oracle software products.

The process of downloading software from OSDC includes following steps:

1. First, go to the Oracle Software Delivery Cloud website:
<https://edelivery.oracle.com>
2. Sign in with your Oracle account. If you do not have an Oracle account, you can register for an account [here](#).
3. Search for the software by typing in the search bar and selecting it. For example, enter 12.6.2 to search for the list of Release 12.6.2 versions of Oracle Documaker software products.
4. Select the platform from the 'Select platform' drop-down.
5. The selected products are then listed under 'Download Queue'. Click the X (cross) which is adjacent to the product in case you want to remove individual files or click 'Remove All' in the lower left corner of the dialog if you want to remove all the listed items.
6. Click 'Continue' to proceed to next screen; you will see a list of the selected software for downloading.
7. Choose the individual software components for download and click 'Continue' if you wish to proceed or 'Return to Search' to review different software for downloading.
8. Read the license agreement carefully; mark the check box to agree with license agreements, and click 'Continue'.
9. Click 'Download' button to download the software or click the filename to individually download the files.
10. While you can save the file on any machine you choose, we recommend you save the file onto the machine where you plan to run it. You must unzip the file on the platform for which it was intended. The length of time it takes to download an application depends on the size of the download, your connection speed, and the amount of traffic on the site.
11. Once the Download has completed, click 'Return to Search' to search and download additional files or click 'Sign Out' to log off Oracle Software Delivery Cloud.

STAGE 2: RUNNING SETUP

In this stage, you run the setup application to install Documaker Enterprise. You will be prompted to enter the information listed on the previous topic.

During the initial installation, the system creates a registry setting that identifies the Oracle Home directory. This directory is the location of where Documaker Enterprise will be installed.

Note During the installation process:

- You are prompted to enter various required values. If you need help completing these values, contact the appropriate system administrator.
 - A set of sample resources will be provided. These resources let you access the sample Correspondence master resource library (MRL) and validate your configuration.
-

Follow these steps to run the setup application:

1. From the installation package, run the setup.exe file on the application tier. On the Welcome window, click Next.

Note The first time you run the Oracle Installation routine, the Specify Inventory Details Window appears. Review the information and click Next.

2. In the Specify Installation Location window, enter:

- The complete installation path. Click Browse to select an installation directory. The default is c:\oracle\odee_1.

Note The name of the installation directory cannot exceed 44 characters. The Oracle limit is 64 characters, but Documaker appends 20 characters to the path.

3. Click Next to continue.
4. In the Specify Administrator Group and User window, enter:

Field	Description
Group	Enter the group name. This provides the installation user with control over initial Administration group and Administration user
User	Enter the user name for the Administrator Group.
Password	Enter the password for the Administrator Group.
Confirm Password	Re-enter password to confirm.

Note With default WebLogic install and steps, we create the WebLogic internal LDAP repository with these values and deploy the example/sample to web app users, so that users can get into Dashboard and Administrator, or optional DI if installation was done without any example users.

5. In the Database Server Details window, indicate the database you will use. Select:

- Oracle
- SQL Server
- DB2 LUW

6. On the Database Server Details window, enter:

Field	For an Oracle database	For a DB2 database	For SQL Server
Host	The host name or static IP address of the database server. The default is the computer where the installation is running from.	The host name or static IP address of the database server. The default is the computer where the installation is running from.	The host name or static IP address of the database server. The default is the computer where the installation is running from.
Port	The port number of the database; the default is 1521.	The port number of the database; the default is 50000	The port number of database; the default port is 1433.
Database	Oracle Database	Name of the database to which ODEE will be connected; the default is IDMAKER	Name of the database to which ODEE will be connected; the default is IDMAKER
Advanced Compression	True*	na	na

Note * The scripts enable advanced compression on certain database columns. If you do not have an Advanced Compression Options license for Oracle 11g, please remove the COMPRESS DEDUPLICATE and COMPRESS HIGH DEDUPLICATE attributes from the scripts in dmkr_asline.sql.

7. The Administration Schema Details window contains settings for the schema where the configuration tables are stored. In this window, enter:

Field	Description
DB Index Folder	The database folder where the physical database index files will be created. Note: This is applicable only for SQL server DB.
DB Folder	The database folder location where the physical database files will be created. If blank, the database folder (directory) is created in the working directory of the database installation. For an Oracle database, this is honored. For a DB2 LUW database, this is only honored if you uncomment the dmkr_admin schema portion and create database section to reference another DB Folder location or enable this setting when the DBA creates the database in DB2.
User	Enter the schema user name. The application will use to connect to the database for the administration layer. The default is dmkr_admin. In case of DB2 database, the username should be less than 8 characters.

Field	Description
Password	The password for the user name the application will use to connect to the database. The default is Admin12.
Confirm Password	Re-enter the password to confirm.
System ID	A unique system ID for this Document Factory instance. If other Document Factory instances (not Assembly Lines) are installed, they also require a unique system ID. For initial installations, accept the default of one (1).
System Name	This is the display name for the Document Factory instance within the Documaker Administrator. The default is System 1. Change this name to reflect the Document Factory system in your organization.

8. Click Next to continue.
9. The Assembly Line Schema Details window contains settings for the schema where the assembly line processing tables are stored. In this window, make these entries:

Field	Description
DB Index Folder	The database folder where the physical database index files will be created. Note: This is applicable only for SQL server DB.
DB Folder	The location where the physical database files will be created. If you leave this field blank, the database folder is created in the working directory of the database installation.
User	This is the name the application connect to the database. The default is dmkr_asline. In case of DB2 database, the username should be less than 8 characters. This user name is also used for the: • Database schema/owner • JDBC data source name • ODBC data source name • Name applied to the Docupresentment service (docupresentment dmkr_asline)
Password	This is the password for this assembly line database. The default is Asline12. This password is also the Documaker Studio password for the Docucorp user.
Confirm Password	Re-enter the password to confirm.
Assembly Line ID	This is the ID for this Assembly Line. If other assembly lines are installed, they require a unique Assembly Line ID. For initial installations, accept the default of one (1).
Assembly Line Name	The display name for the Assembly Line instance within the Documaker Administrator. The default is Assembly Line 1. Change this name to reflect the name of the assembly line in your organization.

When you finish, click Next to continue.

10. On the Application Server Details window, choose the application server you will use. You can choose from these application servers:
 - WebLogic Server 12.2.1.2.0
11. Enter the user value for the web application server that is associated with the domain.
12. The JMS Details window contains the JMS values. If you need help with these values, contact your web application server administrator. In this window, make these entries:

Field	Description
Weblogic	
Connection Class	The name of the Java class used to connect to the JMS queues. Always accept this default: oracle.documaker.ids.JMSConnection
InitialContextFactory	A Java class used when connecting to the JMS queues. Always accept this default: weblogic.jndi.WLInitialContextFactory
Provider URL Protocol	The protocol used to connect to the JMS queues. Always accept the default of t3. You cannot change this value.
Principal	The user name required to start the logical server instances. Enter weblogic for WebLogic.
Credentials	The password for the JMS Principal. Enter a password and use the same while creating the profile.
Confirm Credentials	Re-enter credentials to confirm.

When you finish, click Next to continue.

13. On the Hot Directory window, enter the HotFolder path. This path can include more than one directory, each separated by a comma.

This Hot Folder path applies to the Assembly Line in the previous window. The default is:

[install_root]\documaker\hotdirectory

Note This directory is monitored for jobs that are waiting to be processed.

Click Next to continue.

14. On the optional SMTP Email Server Details window, make these entries:

Field	Description
Host	Enter the IP address or server name of the SMTP server.
Port	Enter the port number of the SMTP server.
User	Enter the user name for the SMTP server.
Password	Enter the password for the SMTP server.
Confirm Password	Re-enter password to confirm.
Sender	Enter the email address the SMTP server uses as the sender for any email publication from the Documaker Document Factory. The default is: admin@hostname

When you finish, click Next to continue.

15. In the Optional WebCenter Information window, enter the WebCenter Content Manager settings:

Field	Description
Enable	Select True to enable documents to be archived to WebCenter. The default is False.
User	Enter the WebCenter user name.
Password	Enter the WebCenter password.
Confirm Password	Re-enter password to confirm.
Connection String	Enter the connection string. Here is an example: idc://hostname:4444
Document URL	Enter the document URL. Here is the default: http://hostname:16200/cs/groups/secure/documents/document

When you finish, click Next to continue.

16. On the Optional UMS details window, enter the User Messaging Services settings:

Field	Description
Enable	Select True to enable user messaging services. The default is False.
User	Enter the UMS server user name.
Password	Enter the UMS server user password.
Confirm Password	Re-enter password to confirm.

Field	Description
Endpoint	Enter the URL of the UMS server used for notifications. The default is: <code>http://ipaddress of host:port/sdpmessaging/parlayx/SendMessageService</code>

When you finish, click Next to continue.

17. On the Installation Summary window, review your installation settings, space requirements, and availability. To make any changes, click Back. Click on Save to save your changes.
18. Click Install to begin the installation process.
19. The Install Status window indicates the progress of the installation. To stop the installation process, click Cancel.
20. If errors occur during the installation, review the `installActions[date_and_time].log` file. This file is usually located in this directory:
[drive letter (usually C:)]\Program Files\Oracle\Inventory\logs\
Note that these standard out files and error logs are also created during the installation process:
 - `oraInstall[date_time].out`
 - `oraInstall[date_time].err`
21. When the installation process has completed, the Installation complete window appears. Click Finish to close this window.

STAGE 3: POST-SETUP

RUNNING DATABASE SCRIPTS AND LOADING THE MRL

The steps you take to run the database scripts and load the master resource library (MRL) vary, depending on the type of database you are using.

If you are using	Follow these steps
An Oracle database	<i>Running the Oracle Database Scripts</i>
A DB2 database	<i>Running the DB2 Database Scripts</i>
SQL Server database	<i>Running the SQL Server Database Scripts</i>

Note To change the Studio user passwords from the Assembly Line schema password, update this script before running it by modifying the Insert commands for the DMRES_DMUSER table.

Running the Oracle Database Scripts

Follow these steps to run the Oracle database scripts:

1. Run the scripts located in the \documaker\database\oracle11g directory. You may need to copy these files to the database server. To run these files, you must have permission to create tables and insert data into the database. These scripts create the required Document Factory administrative and processing database tables. Contact your database administrator (DBA) for assistance.

Script	Description
dmkr_admin.sql	Creates the configuration schema and populates the tables with the entries captured during setup
dmkr_asline.sql	Creates the assembly line schema and the Documaker Studio default user accounts

Note: The names of these scripts are user-defined and may vary.

Note The scripts enable advanced compression on certain database columns. If you do not have an Advanced Compression Options license for Oracle 11g, please remove the *COMPRESS DEDUPLICATE* and *COMPRESS HIGH DEDUPLICATE* attributes from the scripts in dmkr_asline.sql.

2. To create sample user accounts for demonstration purposes and to test the deployment, run the following as the dmkr_admin user:

dmkr_admin_user_examples.sql

3. (Optional) ODEE includes database entries that enable the ODEE web applications to be viewed in other languages. To add support for languages other than English, perform these steps:
- Make sure the script is executed using UTF-8 encoding so the Unicode text within the script is put into the database properly.

If you are using	Then
SQL Developer to run the script	Change the file encoding option to UTF-8 by selecting the Tools, Preferences, Environment option and then setting the Encoding option to UTF8.
SQL Plus to run the script	Set this environment variable (for Windows): NLS_LANG=AL32UTF8

- Run the following scripts as the dmkr_admin user:

- dmkr_admin_xx.sql
- dmkr_asline_xx.sql

Where xx is the abbreviation for the desired language:

Languages	Abbreviation
Dutch	nl
English (Great Britain)	en_GB
French	fr
German	de
Indonesian	in
Japanese	ja
Polish	pl
Portuguese	pt
Russian	ru
Simplified Chinese	zh
Spanish	es

- Make sure the insert statements are committed to the database.

Note Test your connection to the ODBC database to ensure correct configuration by running the c:\windows\syswow64\odbcad32.exe program and then following the prompts. Make sure connection is successful.

4. Run this batch file from the application server to load the Correspondence MRL:
- ```
\documaker\mstrres\dmres\deploysamplemrl.bat
```

This loads the MRL into the database, deploying the sample resources which are used to validate the Document Factory installation.

---

**Note** Ignore this message while running deploy sample MRI : "Did not promote Older resource, Name <TIMESTAMP> ,Type <SYS> , Ver<00001> ,Rev<00001>".

---

- Continue with the steps outlined in *Creating the Web Environment*.

## Running the DB2 Database Scripts

Before you run the scripts, you must create the database. Use the below instructions for installing DB2 LUW:

### Creating a DB2 database

- Add a database in the Control Center which has this name:  
IDMAKER
- For this new database, change the default path to be an empty directory such as c:\db2.
- Set the buffer space and default page size to 32K, then specify where to store the data.

Next, specify the locale and set the Code to UTF-8.

### Running the scripts

---

**Note** To run the DB scripts, confirm that 2 users have been created on the DB2 server with the names entered on the Installers database schema screens. These names must be in keeping with the authentication method that will be used by the database and the related length restrictions. For example, if you are using OS authentication for DB2 on operating system such as AIX, the schema names are limited to 8 characters. To run the Sql scripts, the user logged in must have required permissions to create and modify tables.

---

After creating the database in DB2, open Command Line Processor and run the following scripts.


- Run the scripts located in the \documaker\database\db2 directory. You may need to copy these files to the database server. To run these files, you must have permission to create tables and insert data into the database. These scripts create the required Document Factory administrative and processing database tables.

Contact your database administrator (DBA) for assistance.

| Script         | Description                                                                                      |
|----------------|--------------------------------------------------------------------------------------------------|
| dmrk_admin.sql | Creates the configuration schema and populates the tables with the entries captured during setup |

| Script          | Description                                                                      |
|-----------------|----------------------------------------------------------------------------------|
| dmkr_asline.sql | Creates the assembly line schema and the Documaker Studio default user accounts. |

2. (Optional) In order to populate the system with alternative language options, do the following:
  - a. Open IBM Data Studio and set font in editor for properly displaying Japanese (HG-GothicB-Sun).

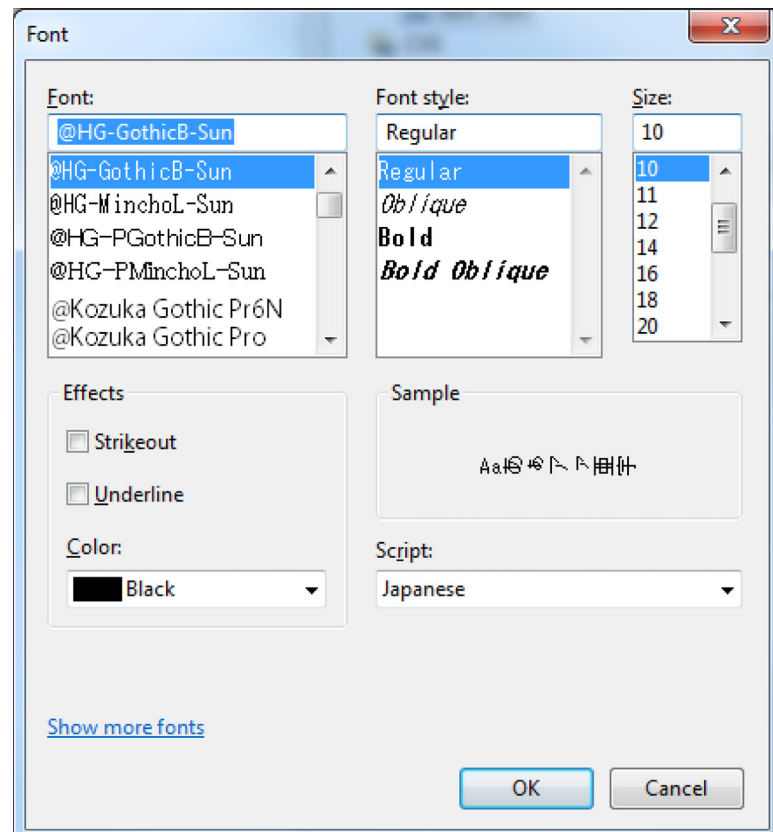


- b. Open the dmkr\_admin\_xx.sql in a text editor that displays text correctly (in the example below, Notepad properly displayed Japanese text).
  - c. Copy and paste the content of the script into IBM Data Studio tool editor for SQL and validate the characters are correct.

Example from Notepad, dmkr\_admin\_ja.sql:

```
INSERT INTO DMKR_TRANSLAT (SYS_ID, AL_ID, APP_ID,
LOCALE_ID, GROUP_ID, ID, DISPLAY) VALUES (99, 999, 111,
'ja', 'TAGS.TAGTYPE', 'PUBS', 'ÄÖ`Èñã');
INSERT INTO DMKR_TRANSLAT (SYS_ID, AL_ID, APP_ID, LOCALE_ID,
GROUP_ID, ID, DISPLAY) VALUES (99, 999, 111, 'ja', 'TAGS.TAGTYPE',
'RCPS', 'Äèó%ø°ÈÄÖ');

INSERT INTO DMKR_TRANSLAT (SYS_ID, AL_ID, APP_ID, LOCALE_ID,
GROUP_ID, ID, DISPLAY) VALUES (99, 1000, 111, 'ja', 'TAGS.TAGTYPE',
'TRNS', '„Éà„É©„ÉŠ„Ç¹„ÇØ„Ç²„Éß„ÉŠ');
```

From IBM Data Studio:

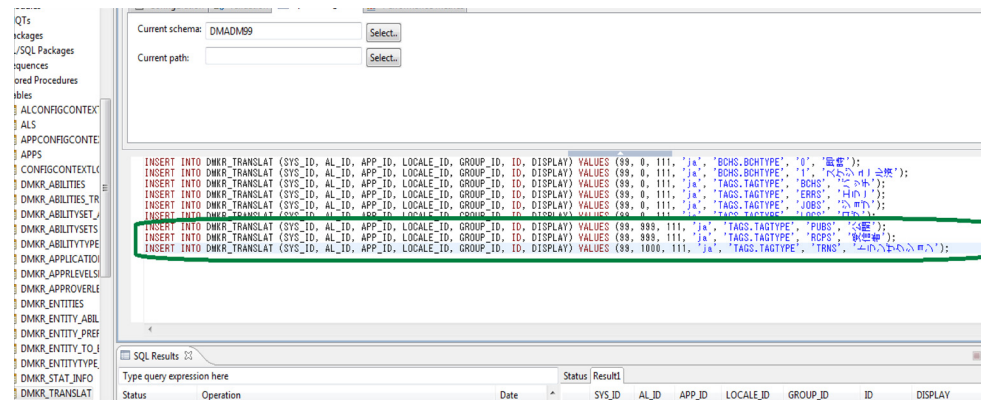

- d. Process the DML statements, inserts, to the correct dmkr\_admin schema.
  - e. Validate that the content appear correctly in table by selecting the rows for review.
  - f. Repeat with the dmkr\_asline\_xx.sql targeting the dmkr\_asline schema for inserts.
3. To create sample user accounts for demonstration purposes, and to test the deployment, run the following as the admin user:
 

```
dmkr_admin_user_examples.sql
```
  4. Copy the following files from the DB2 server location to the appropriate locations in the ODEE installed directories, such as documaker\bin\lib, documaker\docfactory\lib, and documaker\docupresentment\lib.
    - If using DB2 LUW, copy db2jcc4.jar and db2jcc\_license\_cu.jar

---

**Note** Contact your DBA if you need assistance locating the correct files.

---

5. If you are using Windows Integrated security for DB2, make sure the dmkr\_asline users are also DB2 users. Then define the data source name (DSN) of the Documaker Interactive: Correspondence driver (client):

---

**Note** Test your connection to the ODBC database to ensure correct configuration by running the c:\windows\syswow64\odbcad32.exe program and then following the prompts. Make sure connection is successful.

---

6. Run this batch file from the application server to load the Correspondence MRL:
 

```
\documaker\mstrres\dmres\deploysamplemrl.bat
```

This loads the MRL into the database, deploying the sample resources which are used to validate the Document Factory installation.

---

**Note** Keep in mind that the users and sample data referenced in items 3 and 4 above are example data so that you can get a feel for the system and validate it is installed correctly. Your users and resource library will be needed for deployment and use of the system. Once you have configured to your identity management system, you can safely remove the example users in the entities tables and the sample library in the DMRES\_LBY\* tables. See the DEAG for more information about the content in each of these tables within the ODEE schemas.

---

7. Continue with the steps outlined in *Creating the Web Environment*.

## Running the SQL Server Database Scripts

Follow these steps to run the SQL Server database scripts:

1. Run the scripts located in the \documaker\database\sqlserver2012 directory. You may need to copy these files to the database server. To run these files, you must have permission to create tables and insert data into the database. These scripts create the required Document Factory administrative and processing database tables. Contact your database administrator (DBA) for assistance.

---

**Note** Installer sets the default index and non index File Group values (SIZE,MAXSIZE, FILEGROWTH) in the admin and as line scripts. User may need to update these values as per requirement prior to the sql file execution.

---

| Script          | Description                                                                                      |
|-----------------|--------------------------------------------------------------------------------------------------|
| dmkr_admin.sql  | Creates the configuration schema and populates the tables with the entries captured during setup |
| dmkr_asline.sql | Creates the assembly line schema and the Documaker Studio default user accounts                  |

**Note:** The names of these scripts are user-defined and may vary.

---

2. To create sample user accounts for demonstration purposes and to test the deployment, run the following as the dmkr\_admin user:  
dmkr\_admin\_user\_examples.sql
3. (Optional) ODEE includes database entries that enable the ODEE web applications to be viewed in other languages. To add support for languages other than English, perform these steps:
  - a. Make sure the script is executed using UTF-8 encoding so the Unicode text within the script is put into the database properly.

| If you are using                       | Then                                                                                                                                           |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Microsoft SQL Server Management Studio | Change the file encoding option to UTF-8 by selecting the Tools, Preferences, Environment option and then setting the Encoding option to UTF8. |

- b. Run the following scripts as the dmkr\_admin user:

- dmkr\_admin\_xx.sql

- `dmkr_asline_xx.sql`

Where `xx` is the abbreviation for the desired language:

| Languages               | Abbreviation |
|-------------------------|--------------|
| Dutch                   | nl           |
| English (Great Britain) | en_GB        |
| French                  | fr           |
| German                  | de           |
| Indonesian              | in           |
| Japanese                | ja           |
| Polish                  | pl           |
| Portuguese              | pt           |
| Russian                 | ru           |
| Simplified Chinese      | zh           |
| Spanish                 | es           |

- c. Make sure the insert statements are committed to the database.
4. For MS SQL Server, copy the **sqljdbc4.jar** file under `wl_server\server\lib` and `idocumaker_domain\lib` if JDBC Component Schema fails to make connection.

In general, copy the **sqljdbc4.jar** file to the appropriate locations in the ODEE installed directories, such as `documaker\bin\lib`, `documaker\docfactory\lib`, and `documaker\docupresentment\lib`.

5. Run this batch file from the application server to load the Correspondence MRL:  
`\documaker\mstrres\dmres\deploysamplemrl.bat`

This loads the MRL into the database, deploying the sample resources which are used to validate the Document Factory installation.

6. Continue with the steps outlined in *Creating the Web Environment on page 29*.

## CREATING THE WEB ENVIRONMENT

The steps you take to create the web environment vary, depending on the type of database you are using.

| If you are using | Follow these steps              |
|------------------|---------------------------------|
| WebLogic         | Creating WebLogic User Accounts |

## Creating and Deploying a WebLogic Domain

A WebLogic administrator for the WebLogic server needs to complete the following steps to create the WebLogic domain and deploy these web applications:

- Documaker Document Factory Dashboard
  - Documaker Administrator
  - Documaker Interactive:Correspondence (Optional)
1. Copy the \documaker\j2ee directory from the application (business) tier to the WebLogic server using the same structure as on the application tier server, assuming the application tier and weblogic deployment are on separate servers.
  2. Set the variables specific to your environment by editing these files within the  
`\documaker\j2ee\weblogic\databasetype\scripts`  
 directory (where databasetype is the type of database chosen during installation)  
 (e.g. \documaker\j2ee\weblogic\oracle11g\scripts):

| In this file                     | Make these changes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| set_middleware_env.cmd           | Update these values: <ul style="list-style-type: none"> <li>• SET MW_DRIVE=c:<br/>(where c: is the drive letter of your Oracle middleware home)</li> <li>• c:\oracle\middleware\oracle_home</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| weblogic_installation.properties | Change the variable values for these properties. (Modify the value to the right of the equal sign). <ul style="list-style-type: none"> <li>• c:\oracle\middleware\oracle_home</li> <li>• dirDocumakerHome=c:\oracle\odee_1\documaker where c:\oracle\odee_1\ is the directory (where the j2ee folder resides on the WebLogic server. Be sure to include escaped backslashes (\) for the directory separators.)</li> </ul> Replace the '<SECURE VALUE>' (including the single quotes) with the credentials values used on the installation screens for <ul style="list-style-type: none"> <li>• jdbcAdminPassword='&lt;SECURE VALUE&gt;'</li> <li>• jdbcAslinePassword='&lt;SECURE VALUE&gt;'</li> <li>• jmsCredential='&lt;SECURE VALUE&gt;'</li> <li>• adminPasswd='&lt;SECURE VALUE&gt;'</li> <li>• weblogicPassword='&lt;SECURE VALUE&gt;'</li> </ul> <p><b>Note:</b> If JMS connection is not secured, then replace with empty value, e.g. jmsCredential =</p> <p><b>Note:</b> Installer does not set the secure value credentials for security reasons, so they have to be manually entered and secured by the resource deploying the web app.</p> <p>All secure values replaced should be removed from any deployment properties file or the file should be deleted from all locations after web apps are successfully deployed and tested.</p> |

To create the WebLogic domain for hosting the web applications and the supporting resources such as queues, database connections, and Java Naming and Directory Interface (JNDI) references, run this command from ODEE home:

```
documaker\j2ee\weblogic\databasetype\scripts\wls_create_domain.cmd
```

**Note** If you already have a domain on the server and you want to create a new domain, you can still use this script, just update the WebLogic domain name at the bottom of the file.

```
weblogicDomain=
```

---

The program will ask to run the Repository Creation Utility (RCU) to create the Database schema for Middleware. Answer "y" if RCU has not been run or the new schema is required.

Please refer to *Appendix A on page 73* for "Navigating RCU Screens to Create Schemas" details.

Answer "n" after the RCU has been run. The program will continue to run the Fusion Middleware (FMW) Configuration wizard.

Please refer to *Appendix B on page 80* for "Navigating Configuration Wizard Screens to Configure the Domain" details.

3. Run the following script if using Documaker Interactive Correspondence web application;

```
wls_add_correspondence.cmd
```

4. Start "Fusion Middleware Configuration Wizard" by running this command from the [middleware home]\oracle\_common\common\bin directory: Config.cmd
  - a. Select "Update an existing domain"
  - b. On Templates page, add template "Oracle WSM Policy Manager - 12.2.1.2 [oracle\_common]".
  - c. On Advanced Configuration page, select "Topology".
  - d. On Managed Servers page, under "idm\_server", add WSMPPM-MAN-SVR to server groups.
  - e. Update changes.
5. Start the WebLogic AdminServer by running this command from the [middleware home]\user\_projects\domains\idocumaker\_domain\bin directory:

```
startWebLogic.cmd
```
6. Set the following option in the JVM start up process (in WLS console server startup arguments) :

```
-Djbo.pers.max.active.nodes=-1
```

---

**Note** This will increase JVM heap usage, so monitor the heap usage as you may need to increase this accordingly,

---

7. If using MS SQL Server, add EXTRA\_JAVA\_PROPERTIES as'-Djbo.SQLBuilder=SQLServer' in *SetDomainEnv.cmd* file under /domains/idocumaker\_domain/bin.
8. If using IBM DB2, add EXTRA\_JAVA\_PROPERTIES as'-Djbo.SQLBuilder=DB2' in *SetDomainEnv.cmd* file under /domains/idocumaker\_domain/bin.
9. Continue with the steps outlined in *Creating WebLogic User Accounts*.

### Adding MS SQL JDBC jar file to the WebLogic classpath

1. Open a browser to obtain the MS-SQL JDBC Type 4 driver from [Microsoft](#). Click the Download button and select *sqljdbc\_6.2.1.0\_enu.exe*, then click Next. After the file downloads, run the EXE to extract the files into a directory of your choice. Locate the *enu\mssql-jdbc-6.2.1.jre8.jar* file, and copy this file into the following directories:
  - a. <ODEE\_HOME>\documaker\bin\lib
  - b. <ODEE\_HOME>\documaker\docfactory\lib
  - c. <ODEE\_HOME>\documaker\docupresentment\lib
  - d. <WLS\_HOME>\wlserver\server\lib
2. Edit the <WLS\_HOME>\oracle\_common\common\bin\commExtEnv.cmd file and locate this line:

```
set
WEBLOGIC_CLASSPATH=%JAVA_HOME%\lib\tools.jar;%PROFILE_CLASSPATH%;%ANT_CONTRIB%\ant-contrib-1.0b3.jar;%CAM_NODEMANAGER_JAR_PATH%;
```
3. Edit the line by adding the following to the end of it:

```
%WL_HOME%\server\lib\mssql-jdbc-6.2.1.jre8.jar;
```
4. Save the file.

### Creating WebLogic User Accounts

When the AdminServer is able to accept connections, the WebLogic server administrator needs to complete these steps:

---

**Note** To change the web application user passwords from the WebLogic password, update the py files called by each script before running the script.

---

1. To install the standard user accounts, run this command:

```
documaker/j2ee/weblogic/databasetype/scripts/
create_users_groups.cmd
```

This script creates the Documaker user account and the Documaker Administrators group. It adds this user to this group in WebLogic's default authenticator.

2. To install a set of users and groups to be used with the sample resources for Documaker Interactive: Correspondence, run this command:  
`documaker/j2ee/weblogic/databasetype/scripts/create_users_groups_correspondence_example.cmd`
3. Link the new users and groups to the pre-configured entities in the Document Factory Administration registry database by going to the WebLogic server, opening a browser and going to this URL:  
`http://servername:7001/jpsquery`

---

**Note** You may need to change *localhost* to the name of your WebLogic server.

---

## STEP C: STARTING SERVICES

If the weblogic managed server named 'jms\_server' is not started, start it before starting ODEE Factory services.

1. Go to the bin directory and run this command:

```
startManagedWebLogic.cmd jms_server
```

To start Windows services, perform these steps on your application (business) tier:

2. Choose the Start, Administrative Tools, Services option.
3. Start these Windows services:

| Service                                                                                                     | Description                           |
|-------------------------------------------------------------------------------------------------------------|---------------------------------------|
| ODDF Supervisor<br>(AssemblyLine_Schema_Name:System_ID:AssemblyLine_ID)<br>Example: ODDF (dmkr_asline2:1:2) | The Document Factory Windows service. |
| Docupresentment<br>(AssemblyLine_Schema_Name:System_ID:AssemblyLine_ID)<br>Example: ODDP (dmkr_asline:1:2)  | The Docupresentment Windows service.  |

Where *dmkr\_asline* is the schema or user name for the assembly line.

---



---

**Note** If the Supervisor fails to start one of the Workers, it renames that Worker's JAR file in the docfactory\deploy directory with the suffix "\_bad". For example, if the Supervisor is unable to start the Assembler worker, it renames the "assembler.jar" file to "assembler.jar\_bad". This kind of failure can occur in the following scenarios:

- a. The Worker's JAR file is opened, but a valid configuration is not found.
- b. The Worker process fails to locate the executable, or the executable fails to start (missing exe, dll, etc.).
- c. A monitor is started on the Worker process, but the monitor fails to detect that the process is running, or the process is unresponsive.
- d. The set of information about the Worker process is invalid.

In such scenarios, examine the "startup.log" file located in the docfactory\logs folder, for additional information or to know the cause of the problem.

---

## STEP D: STARTING DOCUMAKER ADMINISTRATOR AND DASHBOARD

The steps you take to start the web applications vary, depending on the type of web application server you are using.

---

**Note** A WebLogic administrator should complete this step.

---

### Starting with WebLogic

Start the Documaker Administrator and Documaker Document Factory Dashboard web applications by starting the WebLogic Managed Server (dmkr\_server) as follows:

1. Go to the *dirWeblogicHome*\user\_projects\domains\idocumaker\_domain directory and run this command:

```
start\bin\startManagedWebLogic.cmd dmkr_server
```

2. When prompted, enter the WebLogic user name and password.

---

**Note**

- If you are using a different assembly line id (Not the Default set ID) run this command: `./startManagedWeblogic.cmd idm_al(assemblylineid)_server`
- The name entered should match the name of idm\_server available in weblogic console.

---

## STEP E: STARTING DOCUMAKER INTERACTIVE (OPTIONAL)

The steps you take to start the web applications vary, depending on the type of web application server you are using.

---

**Note** A WebLogic administrator should complete this step *only* if deploying Documaker Interactive.

---

### Starting with WebLogic

A WebLogic administrator should complete this step *only* if deploying Documaker Interactive.

1. Go to the *dirWeblogicHome*\user\_projects\domains\idocumaker\_domain directory and run this command:

```
start\bin\startManagedWeblogic.cmd idm_server
```

2. When prompted, enter the WebLogic user name and password.

In order to prevent generation of files of type BC\*\* include the properties in server start tab as mentioned for each server and then configure WLS to start with nodemanager.

| Server Name                                             | Oracle Database                                                                                  | DB2                                                                                                          |
|---------------------------------------------------------|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>idm_server</b>                                       | -Djbo.passivationstore=database<br>-Djbo.pcoll.mgr=oracle.jbo.pcoll.pmgr.SQLServerPersistManager | -Djbo.passivationstore=database<br>-Djbo.pcoll.mgr=<br>oracle.documaker.shared.model.DB2PersistManagerCustom |
| <b>dmkr_server</b>                                      | -Djbo.passivationstore=database<br>-Djbo.pcoll.mgr=oracle.jbo.pcoll.pmgr.SQLServerPersistManager | -Djbo.passivationstore=database<br>-Djbo.pcoll.mgr=<br>oracle.documaker.shared.model.DB2PersistManagerCustom |
| <b>soa_server</b>                                       | -Djbo.passivationstore=database<br>-Djbo.pcoll.mgr=oracle.jbo.pcoll.pmgr.SQLServerPersistManager | -Djbo.passivationstore=database<br>-Djbo.pcoll.mgr=<br>oracle.documaker.shared.model.DB2PersistManagerCustom |
| <b>Note:</b> Non-soa users can skip the soa_server row. |                                                                                                  |                                                                                                              |

**Note** • When the jms\_server is stopped, the queues are no longer available for Document Factory to access and Document Factory will generate errors that it could not connect to the needed queues. So, when you stop the jms\_server, be sure to stop the Oracle Documaker Document Factory service as well, and restart when jms\_server is available.

### 3. Add SOA to the WebLogic domain:

- a. From the MW\_HOME \wlserver\common\bin\ directory, run this command:  

```
config.cmd
```
- b. Choose Extend an existing WebLogic domain, then click Next.
- c. Select idocumaker\_domain from the WebLogic Domain Directory window, then click Next.
- d. On the Select Extension Source window, choose Oracle SOA Suite 12.2.1.2.0 then click Next.


**Note** SOA may add the Oracle WSM Policy Manager Extension. If so, this is not an error.

- e. View the Configure JDBC Data Sources options (do not change these values), then click Next.

The connection to the database is tested. When the test finishes, view the results, then click Next.

- f. Copy the sqljdbc4.jar file under wl\_server\server\lib, idocumaker\_domain\lib if JDBC Component Schema fails to make connection. This is applicable only for MS SQL Server.
- g. Update the Configure JDBC Component Schema window. This will configure the connections your SOA repository. Click Next.

- h.** The connection to the database is tested. When the test finishes, view the results, then click Next.

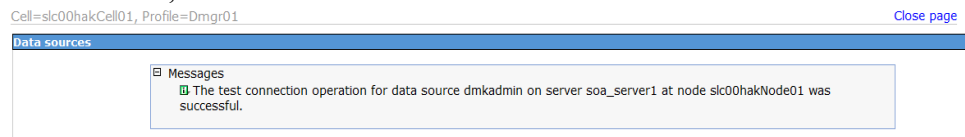

- i.** On the Select Optional Configuration window, click Next.  
**j.** On the Configuration Summary window, click Extend and then Done.  
**k.** To deploy the Oracle Business Rules into the SOA extension, run this command:

```
documaker\j2ee\weblogic\databasetype\bpel\antbuild.cmd
```

- 4.** Start these WebLogic servers (using the same commands as in the previous steps):
- Oracle Admin Server
  - dmkr\_server
  - idm\_server
  - jms\_server

---

**Note** Restart Oracle Documaker Document Factory Service if you had previously stopped it.

---

- 5.** From the *dirWeblogicHome*\user\_projects\domains\idocumaker\_domain directory, run this command:

```
start bin\startManagedWeblogic.cmd soa_server1
```

- 6.** Add soa\_server1 as a target for the dmkr\_admin data source as follows:
- a.** Make sure the AdminServer is ready to accept connections. Using a browser, log into the WebLogic console:  
`http://servername:7001/console`  
 where *servername* is name of the WebLogic server.
  - b.** In the Domain Structure panel, expand Services and select Data Sources.
  - c.** In the Summary section of JDBC Data Sources panel, click the dmkr\_admin link. This is the name of the administrator schema.
  - d.** Select the Targets tab then check the soa\_server1 check box and click Save.
- 7.** Once soa\_server1 is ready to accept connections, deploy the Oracle Business Rule Composites by running this command:

```
documaker\j2ee\weblogic\databasetype\scripts\deploy_soa.cmd
```

## STEP F: FINAL CONFIGURATION AND VALIDATION

Each of the configuration context (SYSCONFIGCONTEXT, ALCONFIGCONTEXT, APPCONFIGCONTEXT) tables has MODIFYTIME, USERTAG1, NOTES, and USER\_NAME columns that can be used to determine what has changed following installation or following another collection of changes. This is helpful to follow-up on when a particular item has changed and why. Additionally, this information can be used to track configuration updates that should be carried forward from one tier environment to another. Therefore, when making changes to the configuration during installation processes or subsequent updates for system maintenance always utilize the USERTAG1 column and/or NOTES columns to group these changes in an identifiable manner. For instance, utilize, initial in the USERTAG1 column for any initial configuration changes following the base installation. Once confirmed and tested, any changes can be updated as ,passed or ready for promotion. Likewise use specific as a USERTAG1 value for any settings that include environment specific data like server names and IP addresses that you may not want to promote to a new environment directly.

1. Make sure you have a network accessible printer available for Document Factory publishing that supports the Multipurpose Internet Mail Extensions (MIME) types the system outputs when you are ready to generate printed output. For more information, see the [Documaker Enterprise Administration Guide](#).
2. Validate the installation of Documaker Administrator by accessing Documaker Administrator from the following link:

`https://servername:10002/DocumakerAdministrator`

where *servername* is the name of the presentation tier.

Use these credentials to log in:

| For       | Enter                                                                                             |
|-----------|---------------------------------------------------------------------------------------------------|
| User name | documaker                                                                                         |
| Password  | The value entered in JMS Credentials during the installation process, unless it has been changed. |

3. Download and configure the WIP Edit plug-in (if using Documaker Interactive).

To edit documents within Documaker Interactive, you need the WIP Edit plug-in. You can download the plug-in from the Oracle Software Delivery Cloud web site and provide it to users by:

- Pushing the installation to your end users.
- Hosting the installation and allow the web application to provide a download link when requested. Make sure the installation is available on a static content server.

If you are hosting the WIP Edit plug-in installation, use Documaker Administrator to enter the location for the installation:

- a. In the left panel, click the Systems link. In the right panel, expand the System node, if it is not already expanded. Expand the Assembly Line node, if it is not already expanded.
  - b. Select the row containing the newly-installed assembly line. Select the Correspondence application. Click Configure.
  - c. On the Correspondence tab, select the ENTRY\_ACTION\_PLUGIN\_INIT category within the ENTRY context and then select the group name, ENTRY\_ACTION\_PLUG\_INIT.
  - d. In the Properties panel, double-click the row containing the property named installer. Change the installer value to be the hosted location for the plug-in installation.
  - e. In the Properties panel, double-click the row that contains the putURL property. Then change the putURL value to reflect the ipaddress:port of the server for the idm\_server web application and click Save. This must be the secure port for Documaker Interactive. The default port is 12002.
4. Validate your Document Factory installation by the performing these tasks:
- a. Create a copy of the extrfile.xml file with the name *extrfile.tmp*. This file is located in the \documaker\mstres\dmres\input folder.
  - b. Move the extrfile.tmp file into the hotfolder directory on the Document Factory server.
  - c. Rename the *extrfile.tmp* file to *extrfile.xml* in the hotfolder directory.

**Note** This step pushes documents through the system. Moving the file with a *tmp* extension makes sure the file is not processed by the Receiver before the file is copied to the hotfolder directory.

5. Validate the web applications using these credentials:

| For                                  | Use                                                                                                                                              |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Documaker Document Factory Dashboard |                                                                                                                                                  |
| URL                                  | https://Servername:10002/DocumakerDashboard                                                                                                      |
| User name                            | documaker                                                                                                                                        |
| Password                             | The value entered in JMS Credentials during the installation process unless it has been changed.                                                 |
| Documaker Interactive (if installed) |                                                                                                                                                  |
| URL                                  | http://Servername:12001/DocumakerCorrespondence<br>When you access this link, you are redirected to the HTTPS port for a more secure connection. |
| User name                            | documaker                                                                                                                                        |
| Password                             | The value entered in JMS Credentials during the installation process, unless it has been changed.                                                |

You have completed the installation and initial configuration of Oracle Documaker Enterprise Edition.

---

**Note** For information on customizing the location of Help files, downloading patches, and downloading documentation updates, see *Maintaining Your System on page 67*.

---

---

## Chapter 3

---

# Installing ODEE in a UNIX Environment

This chapter provides detailed information on how to install and configure Oracle Documaker Enterprise Edition (ODEE) in a UNIX environment.

The installation process consists of the following stages:

- *Stage 1: Pre-Installation Steps on page 41*
- *Stage 2: Running Setup on page 46*
- *Stage 3: Post-Setup on page 52*

## STAGE 1: PRE-INSTALLATION STEPS

Before you install Oracle Documaker Enterprise Edition, make sure you have completed the following steps. Contact the appropriate system administrator for help with web application server details, database, email, and other connection information.

- *Step A: Checking Requirements on page 41*
- *Step B: Downloading the Software on page 43*

### STEP A: CHECKING REQUIREMENTS

1. Make sure you have met the required software and hardware as described in the [Documaker System Requirements Guide](#). This includes having the following:

- An installed database
  - Oracle database
  - IBM DB2
    - LUW

For DB2, make sure the buffer space and default page size are set to 32K. Also, if the data files are on the same drive as the database executable, DB2 requires an environment variable to be set via a command prompt. Once set, restart the database.

- SQL Server
- An installed web application server.
  - Oracle Fusion Middleware 12c infrastructure 12.2.1.2.0

---

**Note** Fusion Middleware will not install to a path with spaces so WebLogic/ WebSphere should be installed in a path without spaces.

---

2. Make sure you have the following information available during the installation process:

- The location where you will be installing Documaker Enterprise. The default installation location is where the home directory is based on the user installing the system.

---

**Note** This is the default location unless there is already an ORACLE HOME directory, in which case the default is the existing ORACLE HOME location.

---

Keep in mind:

- The location path cannot contain spaces.
- The location path must be in lowercase.
- The display names for the Document Factory System and Assembly Line.

- The location of the hot directories where extract data files can be picked up by the Document Factory.
3. Make sure you have the necessary the database connection information, including the database host, port, and system ID (SID).
  4. Make sure you have the necessary web application server connection information including the following:

| For      | Have this information                                             |
|----------|-------------------------------------------------------------------|
| WebLogic | Protocol, host, port, user (principal) and password (credentials) |

5. If you will be using email distribution or notifications, make sure you have the necessary connection information including the host, port, user name, password, and default sender address. The username/password comes from the LDAP system.
6. If you will be using Oracle **WebCenter** (formerly known as UCM) for attachments, make sure you have the necessary connection information available including the user name, password, connection string, and document URL.
7. If you will be using Short Message System (SMS) notifications, make sure you have the necessary Unified Messaging Service (UMS) connection information including the user name, password, and endpoint.
8. If you will be using Documaker Interactive: Correspondence option and wish to use Oracle SOA BPEL option to process Approval Workflow, make sure you have deployed SOA BPEL and have the necessary connection information. Later you will deploy the BPEL process and Oracle Business Rules to SOA and can configure Documaker Interactive to use those endpoints for approval workflow.
9. Make sure you have the appropriate communication ports open between the servers and the appropriate permissions and rights on the servers. System components will use the credentials and ports entered during the installation; these ports may be blocked by default on servers with advanced security.

In addition, advanced security settings may prevent even administrative users from writing to some directories. Please contact your system administrator and security staff for confirmation.

---

**Note** Oracle recommends that you add a common user group for all Oracle installations so the installer files can be shared and recognized within the installed server. Run the installer as a user within this group.

---

### Linux packages required as pre-requisites:

To run Oracle Documaker Enterprise Edition v12.6.2 on Linux, the following Linux packages are required as prerequisites:

1. libstdc++ v33 (32-bit) (e.g. compat-libstdc++-33.i686)
2. libaio.i686 (32-bit)
3. libXext (32-bit)

4. libXrender (32-bit)
5. libXtst (32-bit)\*
6. libtiff (32-bit)

**Example:**

To pre-check the required libraries run a command to aid:

```
$ rpm -qa | grep -E -e 'libstdc++-33' -e libaio -e libXext
-e libXrender -e libXtst -e libtiff | grep -E -e i686 |
grep -v devel
```

**Example output:**

- libXext-1.3.2-2.1.el6.i686
- libXrender-0.9.8-2.1.el6.i686
- libaio-0.3.107-10.el6.i686
- libXtst-1.2.2-2.1.el6.i686
- compat-libstdc++-33-3.2.3-69.el6.i686
- libtiff-3.9.4-10.el6\_5.i686

If there are 6 matches, all the pre-requisites are installed.

If they are not installed properly, please check that the 64-bit versions are installed and use *yum* command to get the matching versions for 32-bit. Enter the following command to check through the 64-bit versions.

```
$ rpm -qa | grep -E -e 'libstdc++-33' -e libaio -e libXext
-e libXrender -e libXtst -e libtiff | grep -v devel
```

## STEP B: DOWNLOADING THE SOFTWARE

The Oracle Software Delivery Cloud (OSDC) site lets you download Oracle software products.

The process of downloading software from OSDC includes following steps:

1. First, go to the Oracle Software Delivery Cloud website:  
<https://edelivery.oracle.com>
2. Sign in with your Oracle account. If you do not have an Oracle account, you can register for an account [here](#).
3. Search for the software by typing in the search bar and selecting it. For example, enter 12.6.2 to search for the list of Release 12.6.2 versions of Oracle Documaker software products.
4. Select the platform from the 'Select platform' drop-down.
5. The selected products are then listed under 'Download Queue'. Click the X (cross) which is adjacent to the product in case you want to remove individual files or click 'Remove All' in the lower left corner of the dialog if you want to remove all the listed items.

6. Click 'Continue' to proceed to next screen; you will see a list of the selected software for downloading.
7. Choose the individual software components for download and click 'Continue' if you wish to proceed or 'Return to Search' to review different software for downloading.
8. Read the license agreement carefully; mark the check box to agree with license agreements, and click 'Continue'.
9. Click 'Download' button to download the software or click the filename to individually download the files.
10. While you can save the file on any machine you choose, we recommend you save the file onto the machine where you plan to run it. You must unzip the file on the platform for which it was intended. The length of time it takes to download an application depends on the size of the download, your connection speed, and the amount of traffic on the site.
11. Once the Download has completed, click 'Return to Search' to search and download additional files or click 'Sign Out' to log off Oracle Software Delivery Cloud.

## STEP C: LOGGING IN AS ROOT

Before you install the Oracle software, you must complete several tasks as the root user. To log in as the root user, complete one of these procedures:

- Installing from an X Window system workstation or terminal
- Installing from a system with X server software

### Installing from an X Window system workstation or terminal

If you are installing the software from an X Window system workstation or X terminal, follow these steps:

1. Start a local terminal session, for example, an X terminal (xterm).
2. If you are not installing the software on the local system, then enter the following command to enable the remote host to display X applications on the local X server:

```
$ xhost fully_qualified_remote_host_name
```

Here is an example:

```
$ xhost somehost.us.acme.com
```

3. If you are not installing the software on the local system, then use the ssh, rlogin, or telnet command to connect to the system where you want to install the software:

```
$ telnet fully_qualified_remote_host_name
```

4. If you are not logged in as the root user, then enter the following command to switch user to root:

```
$ sudo sh
password:
#
```

### Installing from a system with X server software

If you are installing the software from a PC or other system with X server software installed, follow these steps:

---

**Note** Refer to your X server documentation for more information about completing this task. Depending on the X server software you are using, you may need to complete the tasks in a different order.

---

1. Start the X server software.
2. Configure the security settings of the X server software to permit remote hosts to display X applications on the local system.
3. Connect to the remote system where you want to install the software and start a terminal session on that system, for example, an X terminal (xterm).
4. If you are not logged in as the root user on the remote system, enter this command to switch user to root:

```
$ sudo sh
password:
#
```

## STAGE 2: RUNNING SETUP

In this stage, you run the setup application to install Documaker Enterprise. You will be prompted to enter the information listed on the previous topic.

During the initial installation, the system identifies the Oracle home directory. This directory is the location where Documaker Enterprise will be installed.

**Note** During the installation process:

- You are prompted to enter various required values. If you need help completing these values, contact the appropriate system administrator.
- A set of sample resources will be provided. These resources let you access the sample Correspondence master resource library (MRL) and validate your configuration.

Follow these steps to run the setup application:

1. From the installation package, copy the ZIP file to the application server. Then unzip it.
2. Go to the disk1 directory and enter this command: `./runInstaller`
3. The Welcome screen appears. Click Next.
4. In the Specify Inventory directory and on the Credentials window enter:

- The full path of the inventory directory. Here is the default:

`/home/username/orainventory`

This directory houses installer files for all installs created by the Oracle Universal Installer (OUI).

Choose a shared oracle group and choose the shared location for inventory directory and credentials. If you are creating a directory, update the permissions to include the new oracle installer group.

- Specify the Operating System group name. The default is the current user GROUP name.

**Note** This window appears if no other Oracle-based installer using (OUI) has been installed on this application tier.

5. On the Specify Home Details window enter the name of the Oracle Home environment variable. The default is DocumakerHome1. For more information, click the Help button. Then enter the complete installation path. Click Browse to select an installation directory. The default is `/home/user name/oracle/odee_1`.
6. Click Next to continue.
7. In the Specify Administrator Group and User window, enter:

| Field | Description                                                                                                                      |
|-------|----------------------------------------------------------------------------------------------------------------------------------|
| Group | Enter the group name. This provides the installation user with control over initial Administration group and Administration user |

| Field            | Description                                      |
|------------------|--------------------------------------------------|
| User             | Enter the user name for the Administrator Group. |
| Password         | Enter the password for the Administrator Group.  |
| Confirm Password | Re-enter password to confirm.                    |

8. On the Specify Database Type window, indicate the database you will use. Select

- Oracle
- SQL Server
- DB2 LUW

9. On the Database Information window, enter:

| Field                | For an Oracle database                                                                                                         | For a DB2 database                                                                                                             | For SQL Server                                                                                                                 |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Host                 | The host name or static IP address of the database server. The default is the computer where the installation is running from. | The host name or static IP address of the database server. The default is the computer where the installation is running from. | The host name or static IP address of the database server. The default is the computer where the installation is running from. |
| Port                 | The port number of the database; the default is 1521.                                                                          | The port number of the database; the default is 50000                                                                          | The port number of database; the default port is 1433.                                                                         |
| Database             | Oracle Database                                                                                                                | Name of the database to which ODEE will be connected; the default is IDMAKER                                                   | Name of the database to which ODEE will be connected; the default is IDMAKER                                                   |
| Advanced Compression | True*<br>Enter False if you don't have a valid license for use.                                                                | na                                                                                                                             | na                                                                                                                             |

---

**Note** \* The scripts enable advanced compression on certain database columns. If you do not have an Advanced Compression Options license for Oracle 11g, please remove the COMPRESS DEDUPLICATE and COMPRESS HIGH DEDUPLICATE attributes from the scripts in dmkr\_asline.sql.

---

10. The Administration Database Schema window contains settings for the schema where the configuration tables are stored. In this window, enter

| Field            | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DB Index Folder  | The database folder where the physical database index files will be created.<br><b>Note: This is applicable only for SQL server DB.</b>                                                                                                                                                                                                                                                                                                                               |
| DB Folder        | The database folder location where the physical database files will be created. If blank, the database folder (directory) is created in the working directory of the database installation. For an Oracle database, this is honored. For a DB2 LUW database, this is only honored if you uncomment the dmkr_admin schema portion and create database section to reference another DB Folder location or enable this setting when the DBA creates the database in DB2. |
| User             | Enter the schema user name. The application will use to connect to the database for the administration layer. The default is dmkr_admin. In case of DB2 database, the username should be less than 8 characters.                                                                                                                                                                                                                                                      |
| Password         | The password for the user name the application will use to connect to the database. The default is Admin12.                                                                                                                                                                                                                                                                                                                                                           |
| Confirm Password | Re-enter the password to confirm.                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| System ID        | A unique system ID for this Document Factory instance. If other Document Factory instances (not Assembly Lines) are installed, they also require a unique system ID. For initial installations, accept the default of one (1).                                                                                                                                                                                                                                        |
| System Name      | This is the display name for the Document Factory instance within the Documaker Administrator.<br>The default is System 1. Change this name to reflect the Document Factory system in your organization.                                                                                                                                                                                                                                                              |

11. Click Next to continue.
12. The Assembly Line Database Schema window contains settings for the schema where the assembly line processing tables are stored. In this window, make these entries:

| Field           | Description                                                                                                                                                                          |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DB Index Folder | The database folder where the physical database index files will be created.<br><b>Note: This is applicable only for SQL server DB.</b>                                              |
| DB Folder       | The location where the physical database files will be created. If you leave this field blank, the database folder is created in the working directory of the database installation. |

| Field              | Description                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| User               | This is the name the application connect to the database. The default is dmkr_asline. In case of DB2 database, the username should be less than 8 characters.<br>This user name is also used for the: <ul style="list-style-type: none"> <li>Database schema/owner</li> <li>JDBC data source name</li> <li>ODBC data source name</li> <li>Name applied to the Docupresentment service (docupresentment dmkr_asline)</li> </ul> |
| Password           | This is the password for this assembly line database. The default is Asline12. This password is also the Documaker Studio password for the Docucorp user.                                                                                                                                                                                                                                                                      |
| Confirm Password   | Re-enter the password to confirm.                                                                                                                                                                                                                                                                                                                                                                                              |
| Assembly Line ID   | This is the ID for this Assembly Line. If other assembly lines are installed, they require a unique Assembly Line ID.<br>For initial installations, accept the default of one (1).                                                                                                                                                                                                                                             |
| Assembly Line Name | The display name for the Assembly Line instance within the Documaker Administrator. The default is Assembly Line 1. Change this name to reflect the name of the assembly line in your organization.                                                                                                                                                                                                                            |

When you finish, click Next to continue.

13. On the Specify Application Server Type window, choose the application server you will use. Select:
  - WebLogic Server 12.2.1.2.0
14. Enter the user value for the web application server that is associated with the domain.
15. The JMS Setup window contains the JMS values. If you need help with these values, contact your administrator. In this window, make these entries:

| Field                 | Description                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
|                       | Weblogic                                                                                                                                                |
| Connection Class      | The name of the Java class used to connect to the JMS queues. Always accept this default:<br>oracle.documaker.ids.WebLogicJMSConnection                 |
| InitialContextFactory | A Java class used when connecting to the JMS queues. Always accept this default:<br>weblogic.jndi.WLInitialContextFactory                               |
| Provider URL          | The URL used to connect to the JMS queues. Default value is: t3://servername:11001. Update the servername but leave the protocol and port as defaulted. |

| Field               | Description                                                                                      |
|---------------------|--------------------------------------------------------------------------------------------------|
| Principal           | The user name required to start the logical server instances. Enter weblogic for WebLogic.       |
| Credentials         | The password for the JMS Principal. Enter a password and use the same while creating the domain. |
| Confirm Credentials | Re-enter credentials to confirm.                                                                 |

When you finish, click Next to continue.

16. On the Hot Folder window, enter the HotFolder path. This path can include more than one directory, each separated by a comma.

This Hot Folder path applies to the Assembly Line in the previous window. The default is:

```
[Install_Root]/documaker/hotdirectory
```

**Note** This directory is monitored for jobs that are waiting to be processed.

Click Next to continue.

17. On the optional SMTP Email Server window, make these entries:

| Field            | Description                                                                                                                                                    |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SMTP Host        | Enter the IP address or server name of the SMTP server.                                                                                                        |
| SMTP Port        | Enter the port number of the SMTP server.                                                                                                                      |
| SMTP User        | Enter the user name for the SMTP server.                                                                                                                       |
| SMTP Password    | Enter the password for the SMTP server.                                                                                                                        |
| Confirm Password | Re-enter the password to confirm.                                                                                                                              |
| SMTP Sender      | Enter the email address the SMTP server uses as the sender for any email publication from the Documaker Document Factory. The default is admin@docfactory.com. |

When you finish, click Next to continue.

18. In the Optional WebCenter Information window, enter the Universal Content Management settings:

| Field          | Description                                                                        |
|----------------|------------------------------------------------------------------------------------|
| Use WebCenter  | Select True to enable documents to be archived to WebCenter. The default is False. |
| WebCenter User | Enter the WebCenter user name.                                                     |

| Field                       | Description                                                                                                            |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------|
| WebCenter Password          | Enter the WebCenter password.                                                                                          |
| Confirm Password            | Re-enter the password to confirm.                                                                                      |
| WebCenter Connection String | Enter the connection string. Here is an example: <code>idc://hostname:4444</code>                                      |
| WebCenter Document URL      | Enter the document URL. Here is the default:<br><code>http://hostname:16200/cs/groups/secure/documents/document</code> |

When you finish, click Next to continue.

19. On the Optional Oracle (UMS) Information window, enter the User Messaging Services settings:

| Field            | Description                                                          |
|------------------|----------------------------------------------------------------------|
| Use UMS          | Select True to enable user messaging services. The default is False. |
| UMS User         | Enter the UMS server user name.                                      |
| UMS Password     | Enter the UMS server user name.                                      |
| Confirm Password | Re-enter the password to confirm.                                    |
| UMS Endpoint     | Enter the URL of the UMS server used for notifications.              |

When you finish, click Next to continue.

20. On the Summary window, review your installation settings, space requirements, and availability. To make any changes, click Back.
21. Click Install to begin the installation process.

The Install Status window indicates the progress of the installation. To stop the installation process, click Stop Installation.

**Note** The installation routine may display the Execute Configuration Scripts window. This window lists scripts you must run as the root user, specifically the `oraInstRoot.sh` script. If so, follow the instructions on the screen to run the scripts as a user with root permissions.

If errors occur during the installation, review the `installActions[date_and_time].log` file. This file is usually located in this directory:

```
/opt/dmoracle/oraInventory/logs
```

Note that these out files and error logs are also created during the installation process:

- `oraInstall[date_time].out`
- `oraInstall[date_time].err`

22. On completion of the installation process, click Next and Finish.

Your ODEE system has now been installed and the initial configuration has been completed. Continue with *Stage 3: Post-Setup on page 52* to finish the implementation of your ODEE system.

## STAGE 3: POST-SETUP

### RUNNING DATABASE SCRIPTS AND LOADING THE MRL

The steps you take to run the database scripts and load the master resource library (MRL) vary, depending on the type of database you are using.

| If you are using    | Follow these steps                             |
|---------------------|------------------------------------------------|
| An Oracle database  | <i>Running the Oracle Database Scripts</i>     |
| A DB2 database      | <i>Running the DB2 Database Scripts</i>        |
| SQL Server database | <i>Running the SQL Server Database Scripts</i> |

**Note** To change the Studio user passwords from the Assembly Line schema password, update this script before running it by modifying the Insert commands for the DMRES\_DMUSER table.

### Running the Oracle Database Scripts

Follow these steps to run the Oracle database scripts:

1. Run the scripts located in the /documaker/database/oracle11g directory. You may need to copy these files to the database server. To run these files, you must have permission to create tables and insert data into the database. These scripts create the required Document Factory administrative and processing database tables. Contact your database administrator (DBA) for assistance.

| Script          | Description                                                                                       |
|-----------------|---------------------------------------------------------------------------------------------------|
| dmrk_admin.sql  | Creates the configuration schema and populates the tables with the entries captured during setup. |
| dmkr_asline.sql | Creates the assembly line schema and the Documaker Studio default user accounts.                  |

**Note** The scripts enable advanced compression on certain database columns. If you do not have an Advanced Compression Options license for Oracle 11g, please remove the *COMPRESS DEDUPLICATE* and *COMPRESS HIGH DEDUPLICATE* attributes from the scripts in dmkr\_asline.sql.

2. To create sample user accounts for demonstration purposes and to test the deployment, run the following as the dmkr\_admin user:

```
dmkr_admin_user_examples.sql
```

3. (Optional) ODEE includes database entries that enable the ODEE web applications to be viewed in other languages. To add support for languages other than English, perform these steps:
- Make sure the script is executed using UTF-8 encoding so the Unicode text within the script is put into the database properly.

| If you are using                | Then                                                                                                                                           |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| SQL Developer to run the script | Change the file encoding option to UTF-8 by selecting the Tools, Preferences, Environment option and then setting the Encoding option to UTF8. |
| SQL Plus to run the script      | Set this environment variable (for Windows): NLS_LANG=AL32UTF8                                                                                 |

- Run the following scripts as the dmkr\_admin user:

- dmkr\_admin\_xx.sql
- dmkr\_asline\_xx.sql

Where xx is the abbreviation for the desired language:

| Languages               | Abbreviation |
|-------------------------|--------------|
| Dutch                   | nl           |
| English (Great Britain) | en_GB        |
| French                  | fr           |
| German                  | de           |
| Indonesian              | in           |
| Japanese                | ja           |
| Polish                  | pl           |
| Portuguese              | pt           |
| Russian                 | ru           |
| Simplified Chinese      | zh           |
| Spanish                 | es           |

- Make sure the insert statements are committed to the database.
4. Run this script from the application server dmres directory to load the Correspondence MRL:

```
./deploysamplemrl.sh
```

Typically, this script will be in the \documaker\mstrres\dmres\ directory.

**Note** Ignore this message while running deploy sample MRI : "Did not promote Older resource, Name <TIMESTAMP> ,Type <SYS> , Ver<00001> ,Rev<00001>

This loads the MRL into the database, deploying the sample resources which are used to validate your Document Factory installation.

---

**Note** You can use SQL Plus and a client connection to validate database connectivity.

---

5. Continue with the steps outlined in *Creating the Web Environment*.

## Running the DB2 Database Scripts

Before you run the scripts, you must create the database. Use the below instructions for installation on DB2 LUW:

### Creating a DB2 database

1. Open the DB2 command line utility and enter this command:

```
db2 CREATE DATABASE database_name USING CODESET UTF-8
TERRITORY US PAGESIZE 32768
```

### Running the scripts

---

**Note** To run the DB scripts, confirm that 2 users have been created on the DB2 server with the names entered on the Installers database schema screens. These names must be in keeping with the authentication method that will be used by the database and the related length restrictions. For example, if you are using OS authentication for DB2 on operating system such as AIX, the schema names are limited to 8 characters. To run the Sql scripts, the user logged in must have required permissions to create and modify tables.

---


After creating the database in DB2, open your command processing tool and run the following scripts located in the \documaker\database\db2 directory. You may need to copy these files to the database server.

| DB Type | Location                   |
|---------|----------------------------|
| DB2 LUW | \documaker\database\db2v97 |

| Script          | Description                                                                                      |
|-----------------|--------------------------------------------------------------------------------------------------|
| dmkr_admin.sql  | Creates the configuration schema and populates the tables with the entries captured during setup |
| dmkr_asline.sql | Creates the assembly line schema and the Documaker Studio default user accounts.                 |

2. (Optional) In order to populate the system with alternative language options, do the following:



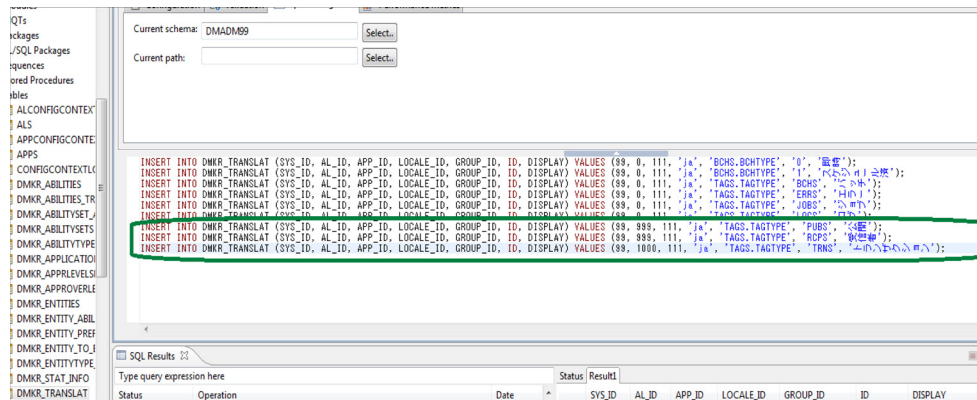

- d. Process the DML statements, inserts, to the correct dmkr\_admin schema.
  - e. Validate that the context appear correct in table by selecting the rows for review.
  - f. Repeat with the dmkr\_asline\_xx.sql targeting the dmkr\_asline schema for inserts.
  - g. Copy the following files from the DB2 server location to the appropriate locations in the ODEE installed directories, such as /bin/lib,documaker/docfactory/lib, and documaker/docupresentment/lib.
- If using DB2 LUW, copy db2jcc4.jar and db2jcc license cu.jar

**Note** Contact your DBA if you need assistance locating the correct files.

3. To create sample user accounts for demonstration purposes, and to test the deployment, run the following as the `dmkr_admin` user:  
`dmkr_admin_user_examples.sql`
4. Run this batch file from the application to load the Correspondence MRL: `/documaker/mstres/dmres/deployssamplemrl.sh`. This loads the MRL into the database, deploying the sample resources which are used to validate the Document Factory installation.

**Note** Keep in mind that the users and sample data referenced in items 3 and 4 above are example data so that you can get a feel for the system and validate it is installed correctly. Your users and resource library will be needed for deployment and use of the system. Once you have configured to your identity management system, you can safely remove the example users in the entities tables and the sample library in the DMRES\_LBY\* tables. See the DEAG for more information about the content in each of these tables within the ODEE schemas.

5. Continue with the steps outlined in *Creating the Web Environment*.

## Running the SQL Server Database Scripts

Follow these steps to run the SQL Server database scripts:

1. Run the scripts located in the \documaker\database\sqlserver2012 directory. You may need to copy these files to the database server. To run these files, you must have permission to create tables and insert data into the database. These scripts create the required Document Factory administrative and processing database tables. Contact your database administrator (DBA) for assistance.

---

**Note** Installer sets the default index and non index File Group values(SIZE,MAXSIZE, FILEGROWTH) in the admin and asline scripts. User may need to update these values as per requirement prior to the sql file execution.

---

2. database tables. Contact your database administrator (DBA) for assistance.

| Script | Description |
|--------|-------------|
|--------|-------------|

|                 |                                                                                                  |
|-----------------|--------------------------------------------------------------------------------------------------|
| dmkr_admin.sql  | Creates the configuration schema and populates the tables with the entries captured during setup |
| dmkr_asline.sql | Creates the assembly line schema and the Documaker Studio default user accounts                  |

**Note:** The names of these scripts are user-defined and may vary.

3. To create sample user accounts for demonstration purposes and to test the deployment, run the following as the dmkr\_admin user:  
dmkr\_admin\_user\_examples.sql
4. (Optional) ODEE includes database entries that enable the ODEE web applications to be viewed in other languages. To add support for languages other than English, perform these steps:
  - a. Make sure the script is executed using UTF-8 encoding so the Unicode text within the script is put into the database properly.

| If you are using | Then |
|------------------|------|
|------------------|------|

|                                        |                                                                                                                                                |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Microsoft SQL Server Management Studio | Change the file encoding option to UTF-8 by selecting the Tools, Preferences, Environment option and then setting the Encoding option to UTF8. |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|

- b. Run the following scripts as the dmkr\_admin user:

- dmkr\_admin\_xx.sql
- dmkr\_asline\_xx.sql

Where xx is the two letter abbreviation for the desired language:

| Languages | Abbreviation |
|-----------|--------------|
|-----------|--------------|

|                         |       |
|-------------------------|-------|
| Dutch                   | nl    |
| English (Great Britain) | en_GB |
| French                  | fr    |

| Languages          | Abbreviation |
|--------------------|--------------|
| German             | de           |
| Indonesian         | in           |
| Japanese           | ja           |
| Polish             | pl           |
| Portuguese         | pt           |
| Russian            | ru           |
| Simplified Chinese | zh           |
| Spanish            | es           |

- c. Make sure the insert statements are committed to the database.
5. Copy the sqljdbc4.jar file to the appropriate locations in the ODEE installed directories, such as documaker/bin/lib, documaker/docfactory/lib, and documaker/docupresentment/lib
6. Run this batch file from the application server to load the Correspondence MRL:  
/documaker/mstrres/dmres/deployssamplemrl.sh  
This loads the MRL into the database, deploying the sample resources which are used to validate the Document Factory installation.
7. Continue with the steps outlined in *Creating the Web Environment on page 58*.

## CREATING THE WEB ENVIRONMENT

The steps you take to create the web environment vary, depending on the type of database you are using.

| If you are using | Follow these steps                              |
|------------------|-------------------------------------------------|
| WebLogic         | <i>Creating and Deploying a WebLogic Domain</i> |

### Creating and Deploying a WebLogic Domain

A WebLogic administrator for the WebLogic server needs to complete the following steps to create the WebLogic domain and deploy these web applications:

- Documaker Document Factory Dashboard
- Documaker Administrator
- Documaker Interactive (Optional)

1. Copy the `[install_root]/documaker/j2ee` directory from the application (business) tier to the WebLogic server using the same structure as on the application tier server, assuming the application tier and weblogic deployment are on separate servers.
2. Set the variables specific to your environment by editing these files within the `\documaker\j2ee\weblogic\databasetype\scripts` directory (where `databasetype` is the type of database chosen during installation)  
(e.g. `\documaker\j2ee\weblogic\oracle11g\scripts`).

| In this file                                  | Make these changes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>set_middleware_env.sh</code>            | Update these values: where the path to the Oracle middleware home.<br><ul style="list-style-type: none"> <li>• <code>"MW_HOME=/home/oracle/middleware</code></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <code>weblogic_installation.properties</code> | Change the variable values for these properties. (Modify the value to the right of the equal sign).<br><ul style="list-style-type: none"> <li>• <code>c:\oracle\middleware\oracle_home</code></li> <li>• <code>dirDocumakerHome=c:\oracle\odee_1\documaker</code> where <code>c:\oracle\odee_1\</code> is the directory (where the <code>j2ee</code> folder resides on the WebLogic server. Be sure to include escaped backslashes (<code>\\</code>) for the directory separators.)</li> </ul> Replace the ' <code>&lt;SECURE VALUE&gt;</code> ' (including the single quotes) with the credentials values used on the installation screen listed" for<br><ul style="list-style-type: none"> <li>• <code>jdbcAdminPassword='&lt;SECURE VALUE&gt;'</code></li> <li>• <code>jdbcAslinePassword='&lt;SECURE VALUE&gt;'</code></li> <li>• <code>jmsCredential='&lt;SECURE VALUE&gt;'</code></li> <li>• <code>adminPasswd='&lt;SECURE VALUE&gt;'</code></li> <li>• <code>weblogicPassword='&lt;SECURE VALUE&gt;'</code></li> </ul> <p><b>Note:</b> If JMS connection is not secured, then replace with empty value, e.g. <code>jmsCredential =</code></p> <p><b>Note:</b> Installer does not set the secure value credentials for security reasons, so they have to be manually entered and secured by the resource deploying the web app.</p> <p>All secure values replaced should be removed from any deployment properties file or the file should be deleted from all locations after web apps are successfully deployed and tested.</p> |

3. To create the WebLogic domain for hosting the web applications and the supporting resources such as queues, database connections, and Java Naming and Directory Interface (JNDI) references, run this command from ODEE home:

```
documaker/j2ee/weblogic/databasetype/scripts
wls_create_domain.sh
```

The script creates the domain with Admin Server, dmkr server and jms server.

**Note** If you already have a domain on the server and you want to create a new domain, you can still use this script, just update the WebLogic domain name at the bottom of the file.

```
weblogicDomain=
```

The program will ask to run the Repository Creation Utility (RCU) to create the Database schema for Middleware. Answer "y" if RCU has not been run or the new schema is required.

Please refer to *Appendix A on page 73* for "Navigating RCU Screens to Create Schemas" details.

Answer "n" after the RCU has been run. The program will continue to run the Fusion Middleware (FMW) Configuration wizard.

Please refer to *Appendix B on page 80* for "Navigating Configuration Wizard Screens to Configure the Domain" details.

4. Run the following script if using Documaker Interactive Correspondence web application;  
`wls_add_correspondence.sh`
5. If using MS SQL Server, add EXTRA\_JAVA\_PROPERTIES as'-  
Djbo.SQLBuilder=SQLServer' in *SetDomainEnv.cmd* file under /domains/  
idocumaker\_domain/bin.
6. If using IBM DB2, add EXTRA\_JAVA\_PROPERTIES as'-  
Djbo.SQLBuilder=DB2' in *SetDomainEnv.cmd* file under /domains/  
idocumaker\_domain/bin.
7. Start the WebLogic AdminServer by running this command from the  
[middleware home]/user\_projects/domains/idocumaker\_domain/bindirectory:  
`startWebLogic.sh`

---

**Note** If ODEE is installed with Assembly line id x then the server name will be `idm_alx_server` and secure port: `12002+(int(x)*10)`.

---

8. Set the following option in the JVM start up process (in WLS console server startup arguments) : `-Djbo.pers.max.active.nodes=-1`

---

**Note** This will increase JVM heap usage, so monitor the heap usage as you may need to increase this accordingly,

---

9. Continue with the steps outlined in *Creating WebLogic User Accounts on page 60*.

## Creating WebLogic User Accounts

When the AdminServer is able to accept connections, the WebLogic server administrator needs to complete the following steps. You can find the shell scripts in the `documaker/j2ee/weblogic/oracle11g/scripts/directory`.

---

**Note** To change the web application user passwords from the WebLogic password, update the `py` files called by each script before running the script.

---

1. To install the standard user accounts, run this command:  
`./create_users_groups.sh`

This script creates the Documaker user account and the Documaker Administrators group. It adds this user to this group in WebLogic's default authenticator.

2. To install a set of users and groups to be used with the sample resources for Documaker Interactive: Correspondence, run this command:

```
./create_users_groups_correspondence_example.sh
```

3. Link the new users and groups to the pre-configured entities in the Document Factory Administration registry database by going to the WebLogic server, opening a browser and going to this URL:

```
http://servername:7001/jpsquery
```

---

**Note** You may need to change *hostname* to the name of your WebLogic server.

---

## STEP D: STARTING SERVICES

If the weblogic managed server named 'jms\_server' is not started, start it before starting ODEE Factory services.

1. Go to the bin directory and run the following command:

```
./startManagedWebLogic.sh jms_server
```

2. To start services, perform these steps on your application (business) tier:

- a. Go to the docpresentment directory and run this command:

```
./docserver.sh start
```

- b. Then go to the docfactory/bin directory and run this command:

```
./docfactory.sh start
```

---

**Note** To see if the services are running, run these commands:

```
./docfactory.sh status
```

```
./docserver.sh status
```

---

If the Supervisor fails to start one of the Workers, it renames that Worker's JAR file in the docfactory/deploy directory with the suffix "\_bad". For instance, if the Supervisor is unable to start the Assembler worker, it renames the "assembler.jar" file to "assembler.jar\_bad". This kind of failure can occur in the following scenarios.

- a. The Worker's JAR file is opened, but a valid configuration is not found.
- b. The Worker process fails to locate the executable, or the executable fails to start (missing exe, dll, etc.).
- c. A monitor is started on the Worker process, but the monitor fails to detect that the process is running, or the process is unresponsive.
- d. The set of information about the Worker process is invalid.

In such scenarios, examine the "startup.log" file located in the docfactory/logs folder, for additional information or to know the cause of the problem.

## STEP E: STARTING DOCUMAKER ADMINISTRATOR AND DASHBOARD

The steps you take to start the web applications vary, depending on the type of web application server you are using.

**Note** A WebLogic administrator should complete this step.

| If you are using | Follow these steps            |
|------------------|-------------------------------|
| WebLogic         | <i>Starting with WebLogic</i> |

### Starting with WebLogic

Start the Documaker Administrator and Documaker Document Factory Dashboard web applications by starting the WebLogic Managed Server (dmkr\_server) as follows:

1. Go to the bin directory and run this command:  

```
./startManagedWebLogic.sh dmkr_server
```
2. When prompted, enter the WebLogic user name and password

## STEP F: STARTING DOCUMAKER INTERACTIVE (OPTIONAL)

The steps you take to start the web applications vary, depending on the type of web application server you are using.

| If you are using | Follow these steps            |
|------------------|-------------------------------|
| WebLogic         | <i>Starting with WebLogic</i> |

### Starting with WebLogic

A WebLogic administrator should complete this step *only* if deploying Documaker Interactive.

1. Go to the bin directory and run this command (optional):  

```
./startManagedWebLogic.sh idm_server
```

2. When prompted, enter the WebLogic user name and password.

- Note**
- If you are using a different assembly line id (Not the Default set ID) run this command: `./startManagedWeblogic.sh idm_al(assemblylineid)_server`
  - The name entered should match the name of idm\_server available in weblogic console.

In order to prevent generation of files of type BC\*\* include the properties in server start tab as mentioned for each server and then configure WLS to start with nodemanager.

| Server Name                                             | Oracle Database                                                                                  | DB2                                                                                                      |
|---------------------------------------------------------|--------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
| idm_server                                              | -Djbo.passivationstore=database<br>-Djbo.pcoll.mgr=oracle.jbo.pcoll.pmgr.SQLServerPersistManager | -Djbo.passivationstore=database<br>-Djbo.pcoll.mgr=oracle.documaker.shared.model.DB2PersistManagerCustom |
| dmkr_server                                             | -Djbo.passivationstore=database<br>-Djbo.pcoll.mgr=oracle.jbo.pcoll.pmgr.SQLServerPersistManager | -Djbo.passivationstore=database<br>-Djbo.pcoll.mgr=oracle.documaker.shared.model.DB2PersistManagerCustom |
| soa_server                                              | -Djbo.passivationstore=database<br>-Djbo.pcoll.mgr=oracle.jbo.pcoll.pmgr.SQLServerPersistManager | -Djbo.passivationstore=database<br>-Djbo.pcoll.mgr=oracle.documaker.shared.model.DB2PersistManagerCustom |
| <b>Note:</b> Non-soa users can skip the soa_server row. |                                                                                                  |                                                                                                          |

- Note** When the jms\_server is stopped, the queues are no longer available for Document Factory to access and Document Factory will generate errors that it could not connect to the needed queues. So, when you stop the jms\_server, be sure to stop the Oracle Documaker Document Factory service and docupresentment first, and restart only once the jms\_server is available.

3. Add SOA to the WebLogic domain:

- From the MW\_HOME/wlserver/common/bin/ directory, run this command:  
`./config.sh`
- Choose Extend an existing WebLogic domain, then click Next.
- Select the idocumaker\_domain from the WebLogic Domain Directory window, then click Next.
- On the Select Extension Source window, choose Oracle SOA Suite 12.2.1.2.0, then click Next.

- Note** SOA may add the Oracle WSM Policy Manager Extension. If so, this is not an error.

- View the Configure JDBC Data Sources options (do not change these values), then click Next.
- The connection to the database is tested. When the test finishes, view the results. Make sure passes with no errors, then click Next.

- g. Update the Configure JDBC Component Schema window. This will configure the connections your SOA repository. Click Next.
- h. The connection to the database is tested. When the test finishes, view the results. Make sure it passed with no errors, then click Next.
- i. On the Select Optional Configuration window, click Next.
- j. On the Configuration Summary window, click Extend and then Done.
- k. To deploy the Oracle Business Rules into the SOA extension, run this command from the /documaker/j2ee/weblogic/oracle11g/bpel/ directory::  
`antbuild.sh`

---

**Note** The antbuild.sh script includes the following path:  
`PATH=$MW_HOME/jdk160_21/bin:$PATH`  
This should be modified if the default JDK path was not selected.

---

- 4. Start these WebLogic servers (using the same commands as in the previous steps):
  - Oracle Admin Server
  - dmkr\_server
  - jms\_server
  - idm\_server

---

**Note** Restart Oracle Documaker Document Factory Service if you had previously stopped it.

---

- 5. From the bin directory, run this command:  
`./startManagedWebLogic.sh soa_server1`
- 6. Add soa\_server1 as a target for the dmkr\_admin data source as follows:
  - a. Make sure the AdminServer is ready to accept connections. Using a browser, log into the WebLogic console:  
`http://servername:7001/console`  
where *hostname* is name of the WebLogic server.
  - b. In the Domain Structure panel, expand Services, then JDBC, and select Data Sources.
  - c. In the Summary section of the JDBC Data Sources panel, click the Admin schema link.
  - d. Select the Targets tab then check the soa\_server1 check box and click Save.
- 7. Once soa\_server1 is ready to accept connections, deploy the Oracle Business Rule Composites by running this command from the /documaker/j2ee/weblogic/databasetype/scripts directory:  
`./deploy_soa.sh`

## STEP G: FINAL CONFIGURATION AND VALIDATION

Each of the configuration context (SYSCONFIGCONTEXT, ALCONFIGCONTEXT, APPCONFIGCONTEXT) tables has MODIFYTIME, USERTAG1, NOTES, and USER\_NAME columns that can be used to determine what has changed following installation or following another collection of changes. This is helpful to follow-up on when a particular item has changed and why. Additionally, this information can be used to track configuration updates that should be carried forward from one tier environment to another. Therefore, when making changes to the configuration during installation processes or subsequent updates for system maintenance always utilize the USERTAG1 column and/or NOTES columns to group these changes in an identifiable manner. For instance, utilize, initial in the USERTAG1 column for any initial configuration changes following the base installation. Once confirmed and tested, any changes can be updated as ,passed or ready for promotion. Likewise use specific as a USERTAG1 value for any settings that include environment specific data like server names and IP addresses that you may not want to promote to a new environment directly.

1. Make sure you have a network accessible printer available for Document Factory publishing that supports the Multipurpose Internet Mail Extensions (MIME) types the system outputs when you are ready to generate printed output. For more information, see the [Documaker Enterprise Administration Guide](#).
2. Validate the installation of Documaker Administrator by accessing Documaker Administrator from the following link:

`https://servername:10002/DocumakerAdministrator`

where *servername* is the name of the web application server.

Use these credentials to log in:

| For       | Use                                                                                               |
|-----------|---------------------------------------------------------------------------------------------------|
| User name | documaker                                                                                         |
| Password  | The value entered in JMS Credentials during the installation process, unless it has been changed. |

3. Download and configure the WIP Edit plug-in accessibility (if using Documaker Interactive).

To edit documents within Documaker Interactive, you need the WIP Edit plug-in. You can download the plug-in from the Oracle Software Delivery Cloud web site and provide it to users by:

- Pushing the installation to your end users.
- Hosting the installation and allow the web application to provide a download link when requested. Make sure the installation is available on a static content server.

If you are hosting the WIP Edit plug-in installation, use Documaker Administrator to enter the location for the installation:

- a. In the left panel, click the Systems link. In the right panel, expand the System node, if it is not already expanded. Expand the Assembly Line node, if it is not already expanded.

- b. Select the row containing the newly-installed assembly line. Select the Correspondence application. Click Configure.

---

**Note** If changing anything in Correspondence application, restart the idm server to view the changes.

---

- c. On the Correspondence tab, select the ENTRY\_ACTION\_PLUGIN\_INIT category within the ENTRY context and then select the group name, ENTRY\_ACTION\_PLUG\_INIT.
  - d. In the Properties panel, double-click the row containing the property named installer. Change the installer value to be the hosted location for the plug-in installation.
  - e. Click Save.
4. Configure the WIP Edit plug-in communication.

To ensure the plug-in communicates to Documaker Interactive do the following in the Documaker Administrator:

- a. In the left panel, click the Systems link. In the right panel, expand the System node, if it is not already expanded. Expand the Assembly Line node, if it is not already expanded.
- b. Select the row containing the newly-installed assembly line. Select the Correspondence application. Click Configure.
- c. On the Correspondence tab, select the ENTRY\_ACTION\_PLUGIN\_INIT category within the ENTRY context and then select the group name, ENTRY\_ACTION\_PLUG\_INIT.
- d. In the Properties panel, double-click the row that contains the putURL property. Then change the putURL value to reflect the machine name:port or ipaddress:port of the server for the idm\_server web application and click Save. This must be the secure port for Documaker Interactive. The default port is 12002.
- e. Click Save.

---

**Note** The machine name:port or ipaddress:port must match the browser's address bar when you access the application.

---

5. (Optional) To enable the Documaker Interactive attachment tab for WebCenter, see the [Documaker Enterprise Administrator Guide](#) topic on “Enabling WebCenter”.
6. Validate your Document Factory installation by performing these tasks:
  - a. Create a copy of the extrfile.xml file with the name *extrfile.tmp*. This file is located in the /documaker/mstres/dmres/input folder.
  - b. Move the extrfile.tmp file into the hotdirectory directory on the Document Factory server.
  - c. Rename the *extrfile.tmp* file to *extrfile.xml* in the hotdirectory directory.

- d. Look at the JOB created in the Document Factory Dashboard application, see that it was created and generated 12 transactions, three of which are staged for Documaker Interactive editing and the other 9 of which are distributed and in a successfully completed state.

**Note** This step pushes documents through the system. Moving the file with a *tmp* extension makes sure the file is not processed by the Receiver before the file is copied to the hotdirectory directory.

7. Validate the web applications using these credentials:

| For                                  | Use                                                                                                                                                                                                                              |
|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Documaker Document Factory Dashboard |                                                                                                                                                                                                                                  |
| URL                                  | https://servername:10002/DocumakerDashboard                                                                                                                                                                                      |
| User name                            | documaker                                                                                                                                                                                                                        |
| Password                             | The value entered in JMS Credentials during the installation process, unless it has been changed.                                                                                                                                |
| Documaker Interactive (if installed) |                                                                                                                                                                                                                                  |
| URL                                  | http://servername:port/DocumakerCorrespondence<br>When you access this link, you are redirected to the HTTPS port for a more secure connection.<br>Note: Port value is the port Correspondence application deployed in the setup |
| User name                            | documaker                                                                                                                                                                                                                        |
| Password                             | The value entered in JMS Credentials during the installation process, unless it has been changed.                                                                                                                                |

You have completed the installation and initial configuration of Oracle Documaker Enterprise Edition.

**Note** For information on customizing the location of Help files, downloading patches, and downloading documentation updates, see *Maintaining Your System on page 67*.

---

## Chapter 4

---

# Maintaining Your System

This chapter provides information on how to maintain your Oracle Documaker Enterprise Edition (ODEE) implementation.

This chapter describes:

- *Changing the Help Location* on page 68
- *Downloading Patches* on page 69
- *Downloading the Documentation* on page 70
- *Deinstalling the Software* on page 71

## CHANGING THE HELP LOCATION

If you want to access the online Help from a location other than the default WebLogic installation, such as on a static content server or via the Oracle Technology Network (OTN), you can modify the online Help configuration as follows:

---

**Note** You can find the various Help files on OTN, on the following Web page:  
<http://www.oracle.com/technetwork/documentation/insurance-097481.html>

---

### Document Factory Dashboard Help

You must define the new location for the Document Factory Dashboard Help content. The Help content is provided with the installation within this file:

```
documaker\j2ee\weblogic\dashboard\ODDF_Dashboard.ear
```

Within the Administrator, set the helpLink property to the hosted Help location for the Document Factory Dashboard configuration within the All Assembly Line.

---

**Note** The configuration within the All Assembly Line applies to the system level applications. Here is the default:

```
http://servername/ODDF_Dashboard_Help/help.html
```

---

### Documaker Interactive: Correspondence Help

You must define the new location for the Documaker Interactive: Correspondence Help content. The Help content is provided with the installation within this file:

```
documaker\j2ee\weblogic\idocumaker_correspondence\idm.ear
```

Within the Administrator, set the helpLink property to the hosted Help location for the SYSTEM\_IDS group in the Correspondence application configuration in the deployed Assembly Line. Here is the default:

```
http://servername:port/DocumakerCorrespondence/static/help/
index.html
```

## DOWNLOADING PATCHES

You can download the latest Oracle software patches at the My Oracle Support website. The process includes:

- Going to the My Oracle Support site (requires registration)
- Searching for the patches you want to download
- Downloading those patches

To download Oracle software patches, go to the My Oracle Support website:

<https://support.oracle.com>

## DOWNLOADING THE DOCUMENTATION

You can download the latest Oracle Documaker documentation at the Oracle Technology Network (OTN) web site. The process includes:

- Going to the applicable page on the OTN site
- Searching for the documentation you want to download
- Downloading that documentation

To download Oracle Documaker documentation, go to this page on OTN:

<http://www.oracle.com/technetwork/documentation/insurance-097481.html>

## DEINSTALLING THE SOFTWARE

You can uninstall your Documaker software before making your selection of products to install or after a successful install. To remove Documaker software, follow these steps:

### Step A: Remove ODEE Weblogic Server domain server resources

1. Shutdown all the ODEE Services (e.g. Docupresentment, Document Factory).
2. Unlock any WebLogic Server Admin Server Domain locked from user edit sessions.
3. Run *remove\_odee\_domain\_resources.cmd* or *remove\_odee\_domain\_resources.sh* script.

This process removes:

- The ODEE WebLogic Server domain server resources (e.g. JMS, DataSources, etc)
- Web apps (e.g. Documaker Administrator, Documaker Dashboard, Documaker Web Services, Documaker Interactive, etc)
- Managed servers (jms\_server\_#, dmkr\_server\_#, idm\_#\_server\_#, etc)

---

**Note** ODEE Services will no longer function after completing these steps as they depend on the JMS services but, the domain server components can be redeployed by normal WebLogic Server domain server deployment of the ODEE resources and ODEE Services are restored if needed without full ODEE Services re-installation.

---

### Step B: Stop the following processes

1. Stop Docupresentment and Supervisor services of ODEE before you start the deinstallation process. If any of the services are running, it may lead to partial deinstallation of ODEE.
2. Stop all application servers before starting deinstallation process of ODEE.
3. From the command prompt access *setup.exe* to start the deinstall process. e.g *C:\Oracle\odee\_1\oui\bin\setup.exe -deinstall -jreLoc <path\_to\_jre>*.

```

Administrator: Command Prompt
Directory of C:\Oracle\odee_1\oui\bin
01/16/2014 02:45 AM <DIR> ..
01/16/2014 02:45 AM <DIR> .
01/23/2013 03:58 AM 411 access_setup.bat
01/16/2014 02:44 AM 88 addLangs.bat
01/23/2013 03:58 AM 26 addLangs.stage
01/16/2014 02:44 AM 63 addNode.bat
01/16/2014 02:44 AM 452 attachHome.bat
01/16/2014 02:44 AM 353 detachHome.bat
01/23/2013 03:58 AM 39,936 lsnodes.exe
01/23/2013 03:58 AM 97,280 oraInstaller.dll
01/23/2013 03:58 AM 2,714 oraparam.stage
01/23/2013 03:58 AM 142,848 orasrvm11.dll
01/23/2013 03:58 AM 9,728 orauts.dll
01/23/2013 03:58 AM 20,480 orawsec11.dll
01/16/2014 02:44 AM 349 ouica.bat
00/12/2000 06:54 AM 326 ouica.sh
01/16/2014 02:44 AM <DIR> resource
01/16/2014 02:44 AM 543 runConfig.bat
01/23/2013 03:58 AM 99,328 setup.exe
 16 File(s) 414,925 bytes
 3 Dir(s) 136,085,188,608 bytes free

C:\Oracle\odee_1\oui\bin>setup.exe -deinstall -jreLoc c:\jre

```


---

**Note** If you run the setup.exe directly from the installed ODEE path, it may leave empty installation directory after deinstallation process. To avoid this, run the *setup.exe* outside of installation directory.

---

### Step C: Begin the deinstallation

1. Follow the required steps as shown in the Oracle Documaker Enterprise Edition Deinstallation window

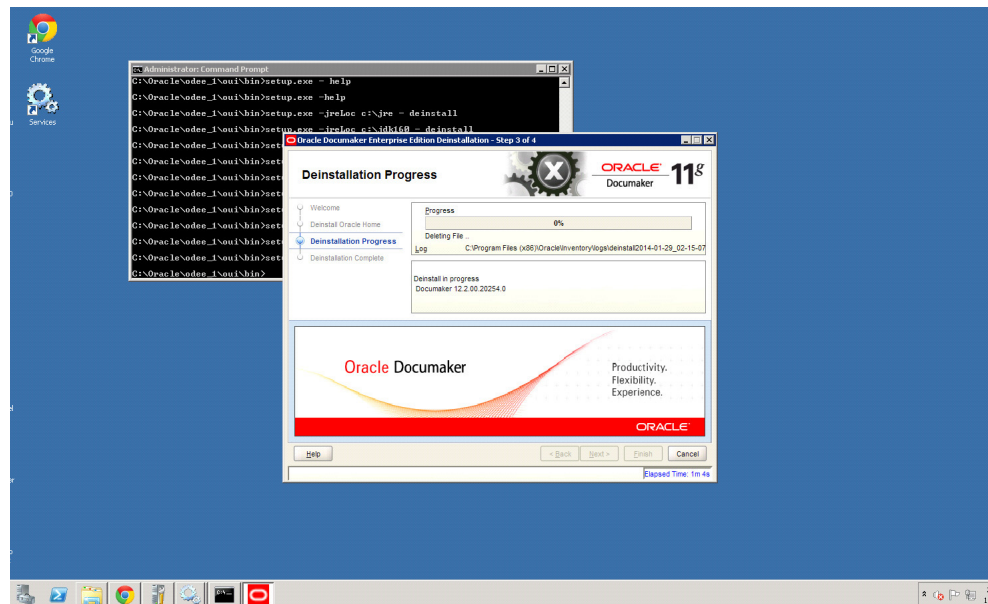

2. Open domain-registry.xml under \$Middleware\_HOME .Remove the corresponding entry referring to idocumaker\_domain.
3. Open nodemanager.domains file under \$Middleware\_HOME \wlserver\_10.3\common\nodemanager\ folder and remove the corresponding entry referring to idocumaker\_domain.
4. Delete the domain folder under domains folder manually.  
\$Middleware\_HOME\user\_projects\domains\idocumaker\_domain
5. Delete the domain folder under applications folder manually.  
\$Middleware\_HOME\user\_projects\ applications\idocumaker\_domain
6. After deinstall, manually delete the ODEE folder: C:\oracle\odee\_1. The ODEE folder can be deleted as part of de-installation as well but the de-installation has to be invoked from some other folder (other than ODEE).
7. Drop ODEE admin and assembly line schema from the database.

---

**Note** Ensure that none of the folder/files within ODEE Home are open while running the deinstall, if open then it will fail to remove the directory.

---

---

## Appendix A

---


### Navigating RCU Screens to Create Schemas

Once the program has started, you will see following RCU screen.




Click 'Next' to continue and follow these steps.


1. Select 'Create Repository' radio button and 'System Load and Product Load' radio button and click Next.

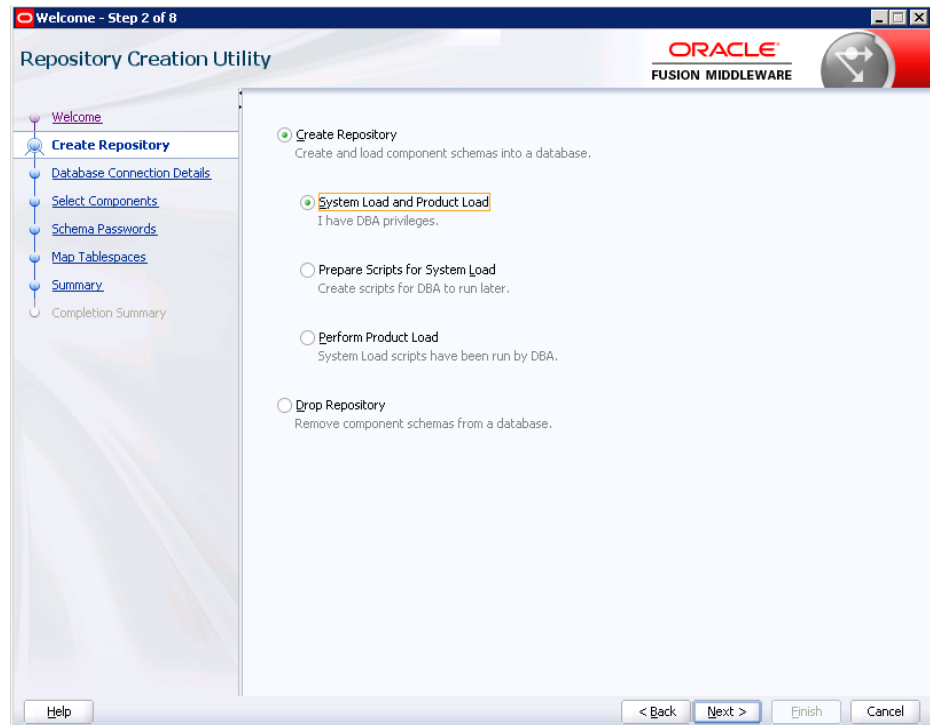


2. Provide database details and click 'Next'.

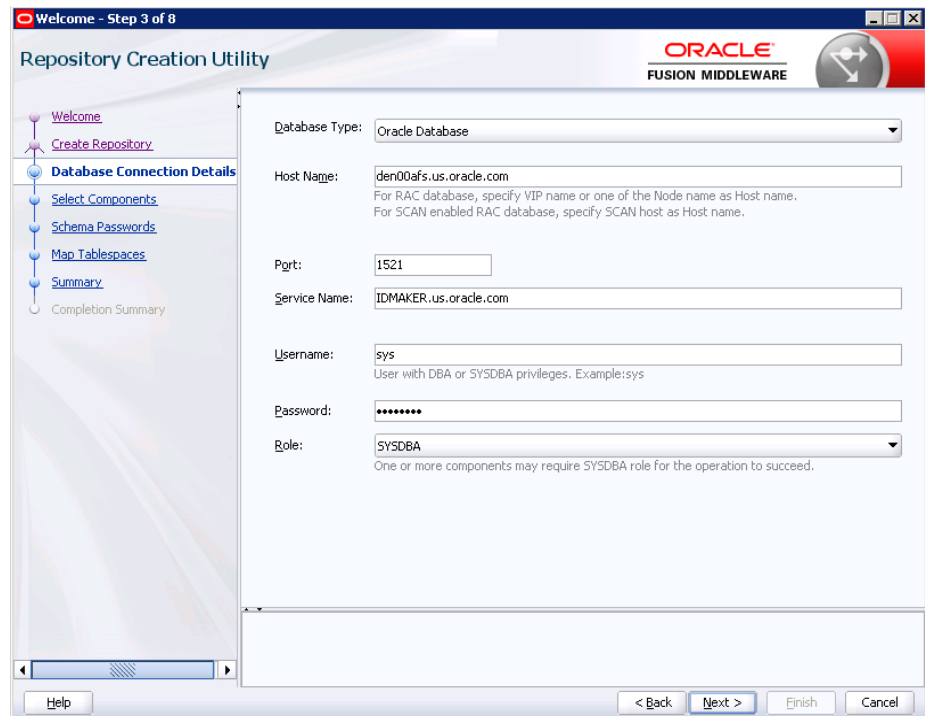


3. Click 'OK'.

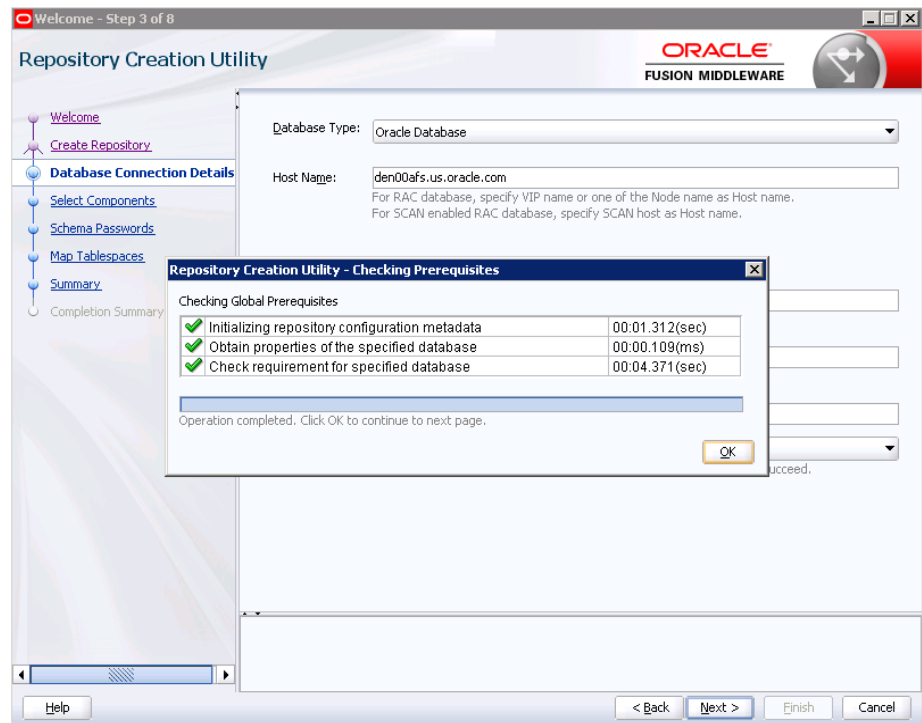


4. Select 'Oracle Platform Security Services' check box, it automatically selects dependent components.

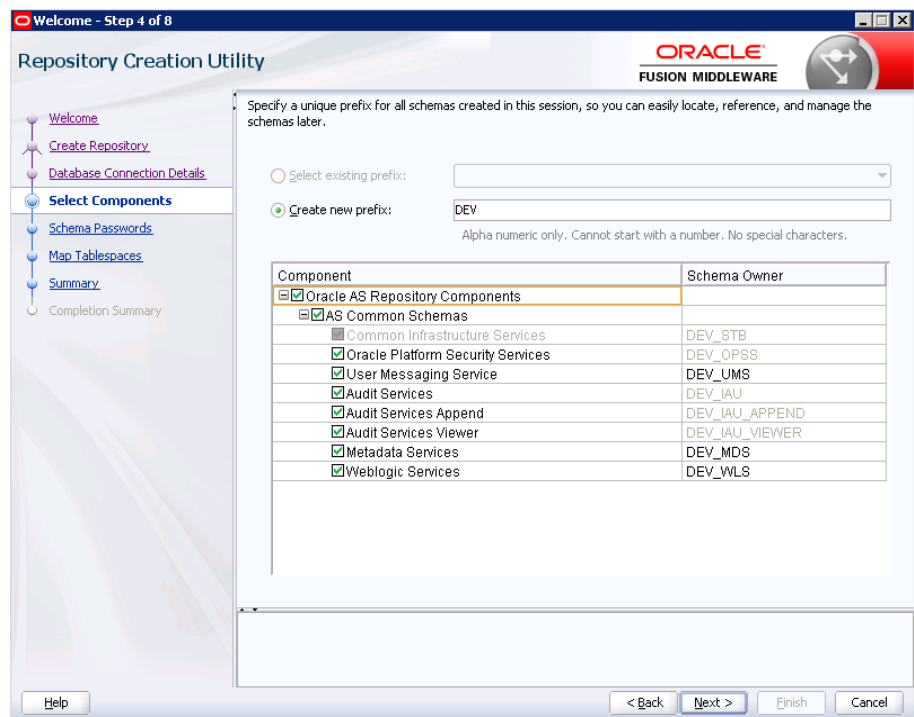


5. Click 'OK' after successful processing as shown in the following screen.

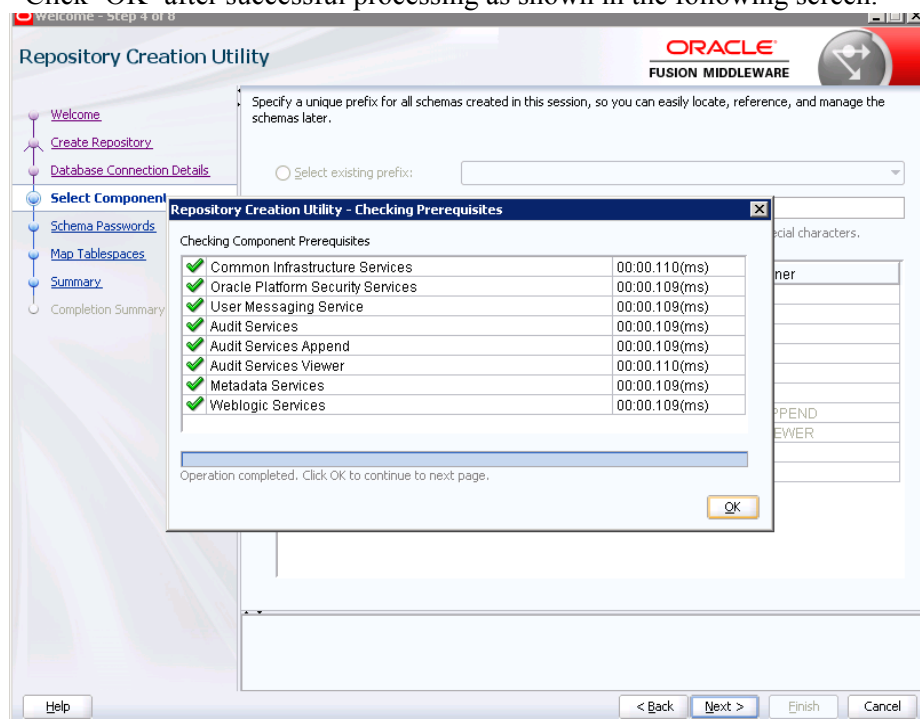


6. Enter password for your schema.

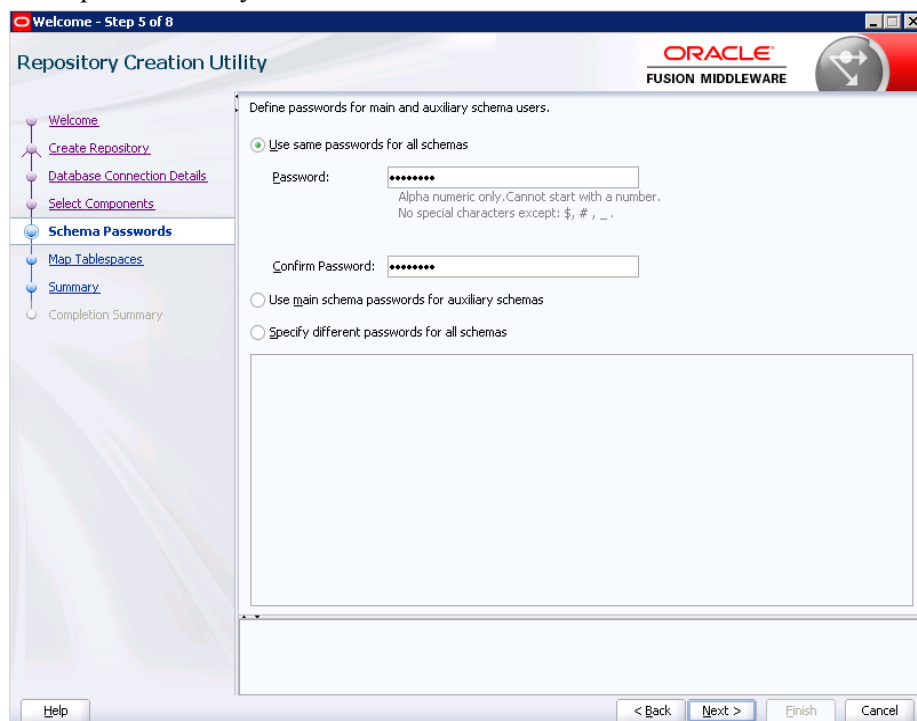


7. Click 'Next'.

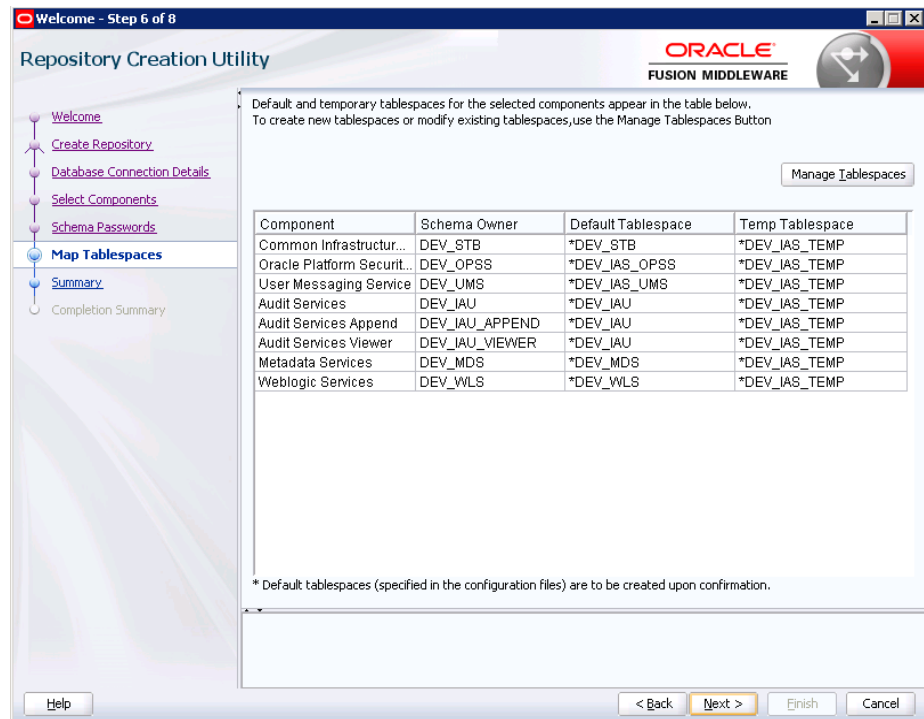


8. Click 'OK'.

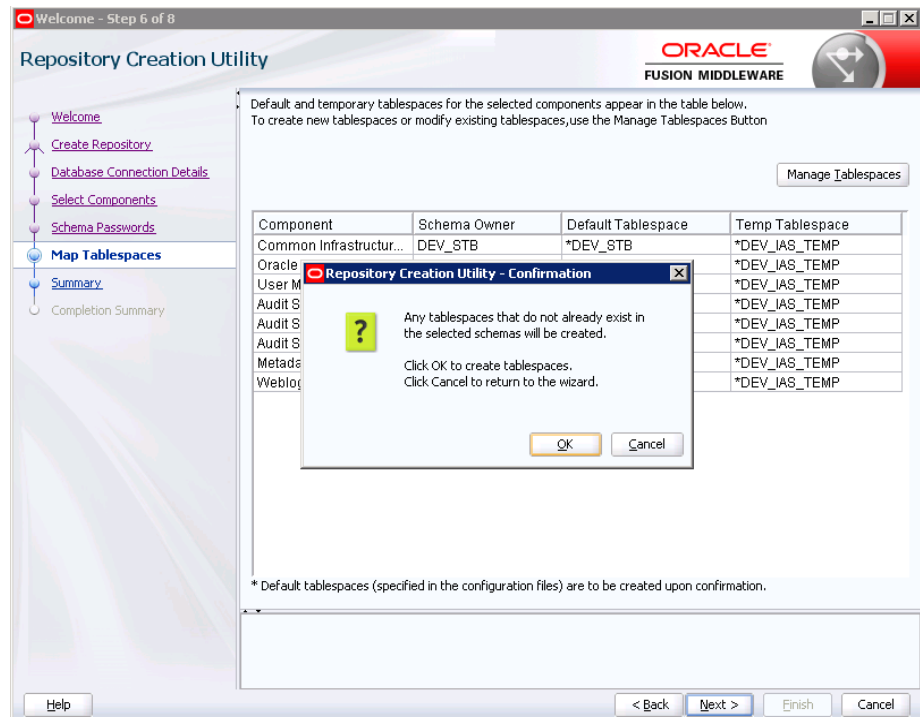


9. Click 'OK' again.

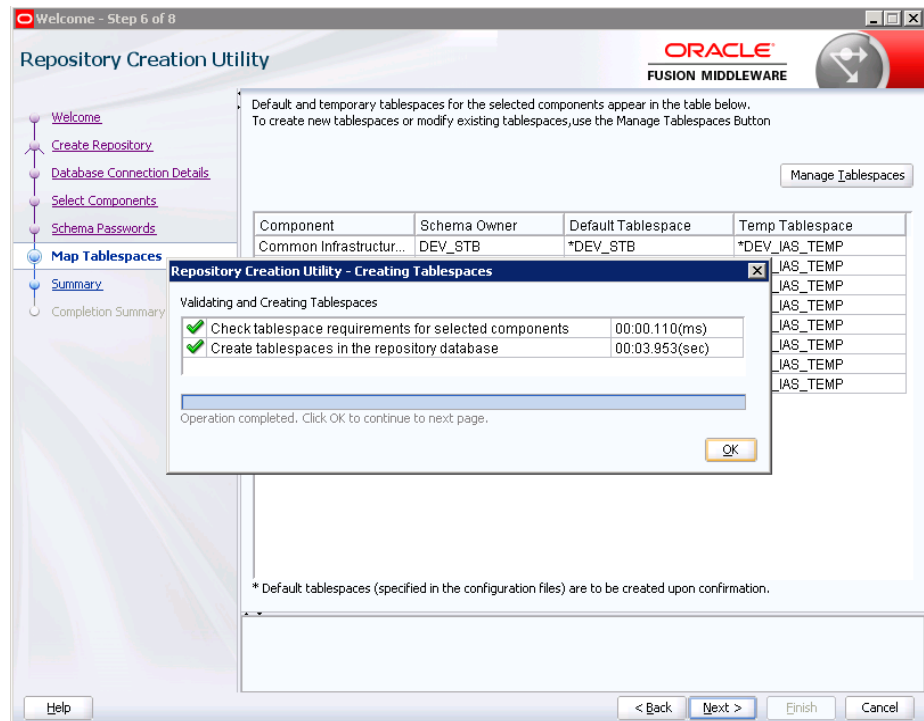

10. Click 'Save Response File' to save the installation information and click 'Create'.

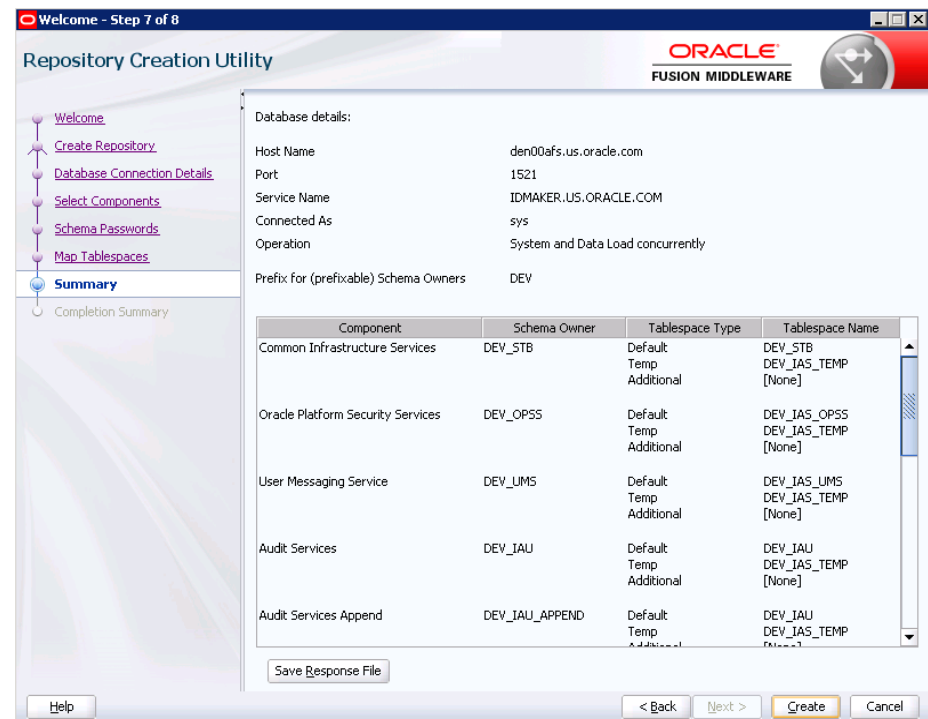

11. Database schema is created. Click 'Close'.

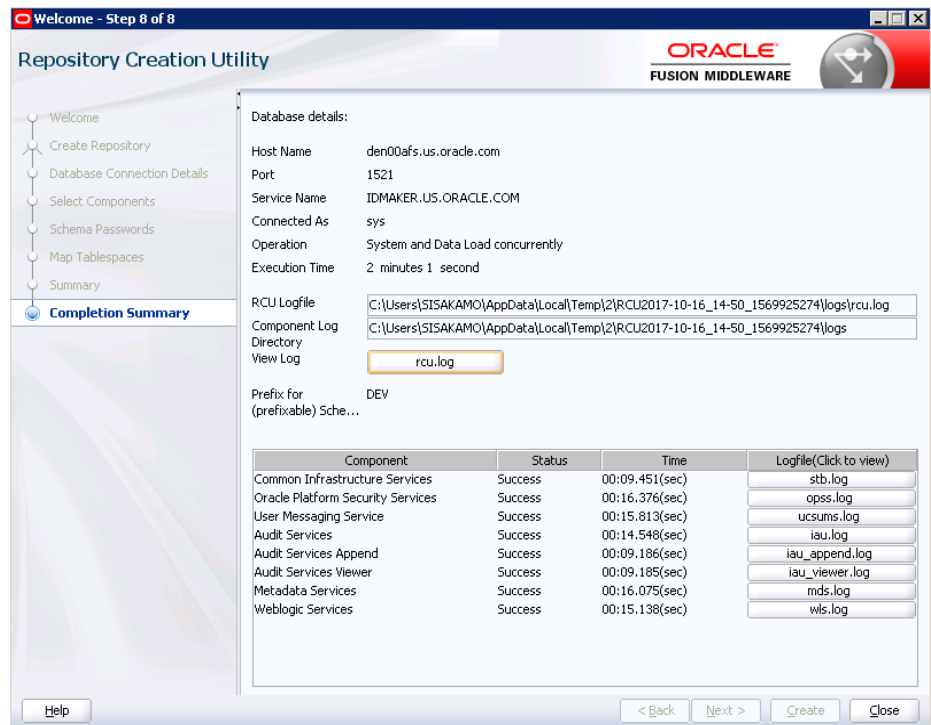

Information on Repository Creation Utility (RCU) is also available on <https://docs.oracle.com/middleware/12212/lcm/INFIN/GUID-CA80A6E9-8903-4E19-81D7-A3647A11D0A6.htm#INFIN358>

---

## Appendix B

---


### Navigating Configuration Wizard Screens to Configure the Domain

Following the database schema creation, the Fusion Middleware (FMU) Configuration wizard screen displays. Follow the steps to continue with the FMU configuration:


1. Select 'Create a new domain' radio button and provide domain location..




2. Select 'Oracle JRF - 12.2.1.2.0 [oracle\_common]' check box, it automatically selects dependent component. Click 'Next'.

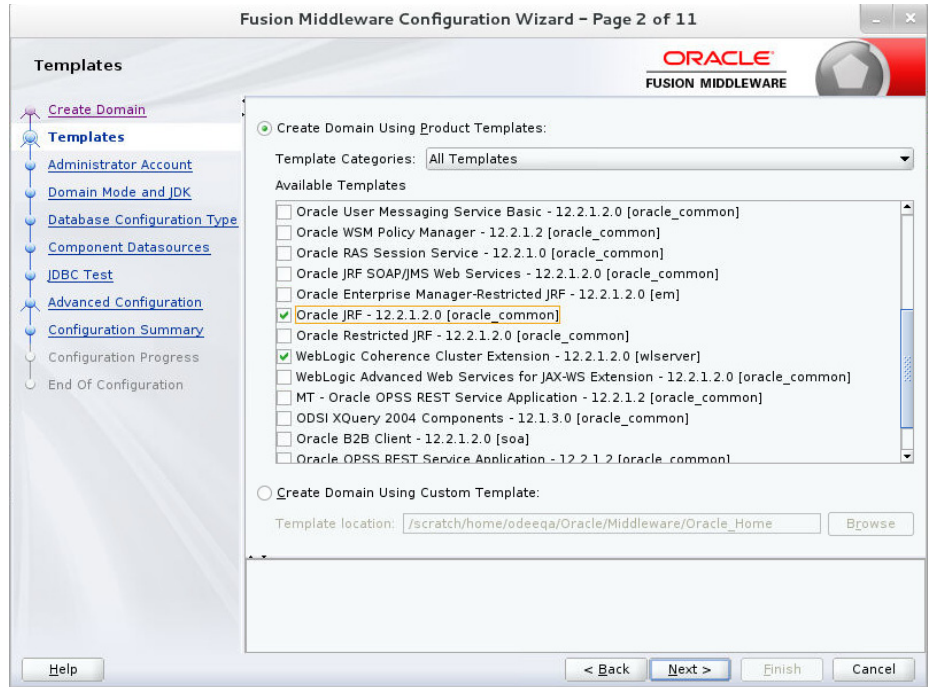


3. Enter weblogic username and password. Click 'Next'.

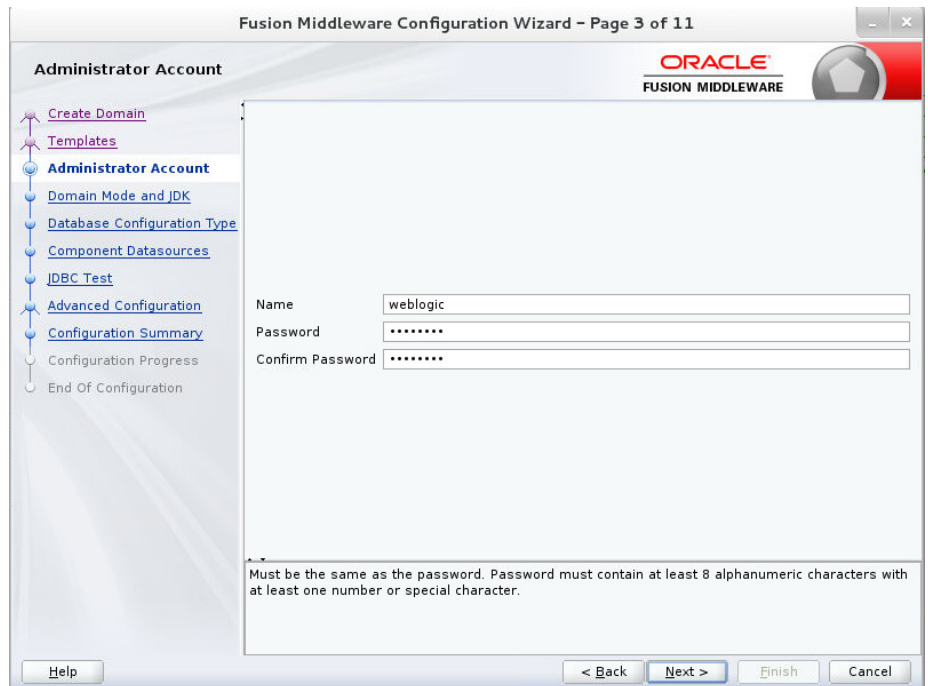


4. Select Development radio button and click 'Next'.

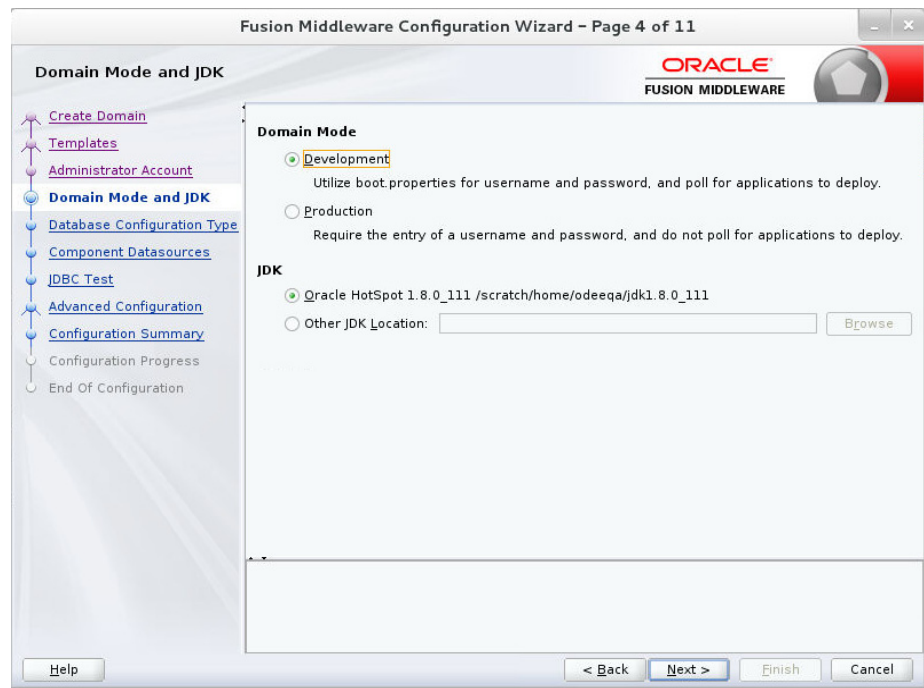


5. Enter database, driver and schema owner details.

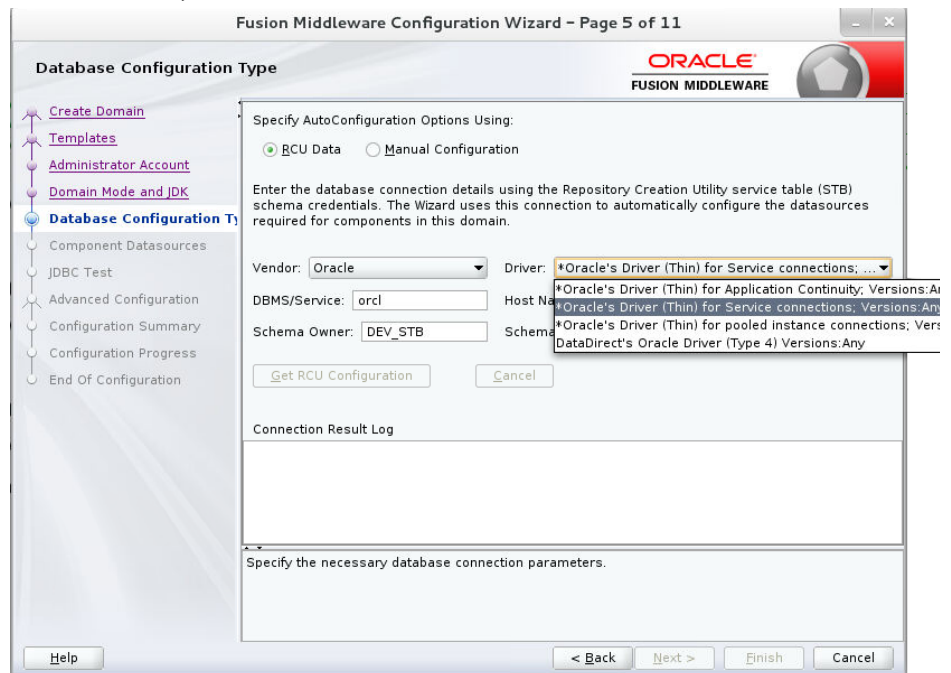

6. Click 'Get RCU Configuration' button.

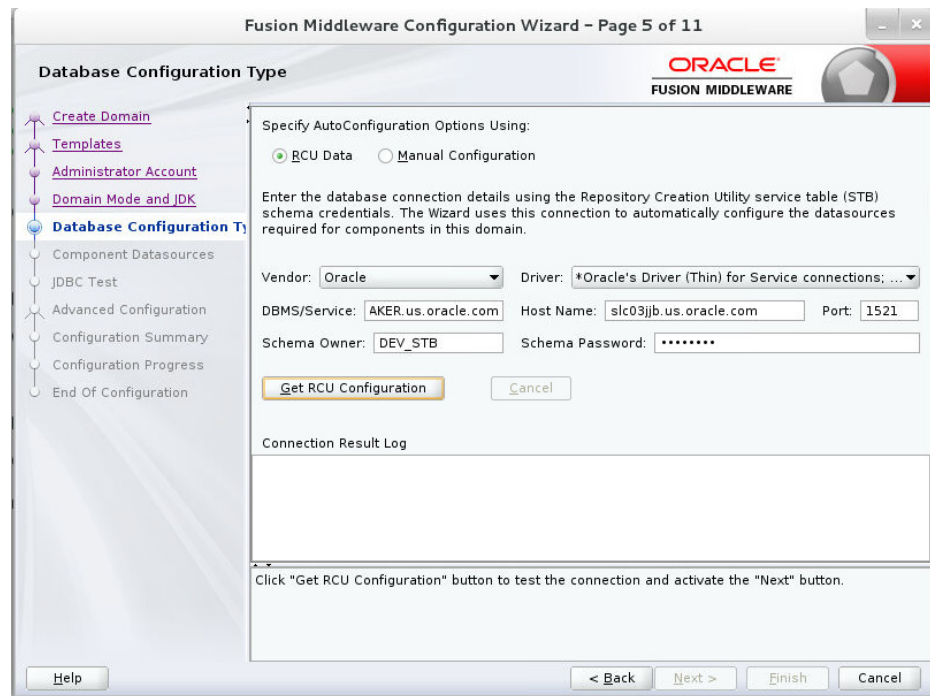

7. If you see Successfully Done in 'Connection result log' click 'Next'.

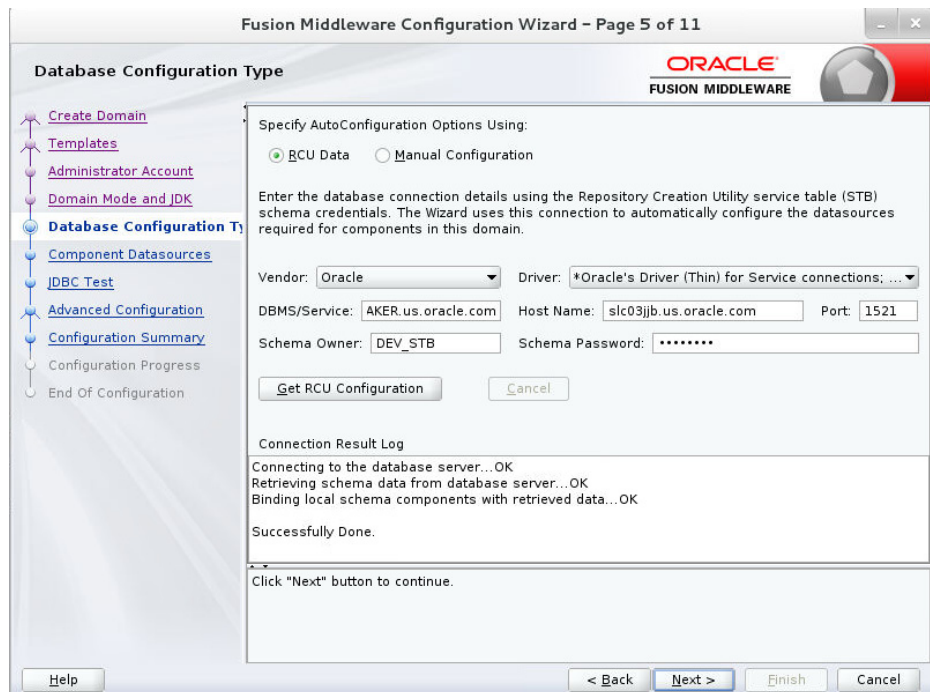

8. Select all check boxes and click 'Next'.

The screenshot shows the 'JDBC Component Schema' configuration window. The left sidebar lists steps: Create Domain, Templates, Administrator Account, Domain Mode and JDK, Database Configuration Type, Component Datasources, JDBC Test, Advanced Configuration, Configuration Summary, Configuration Progress, and End Of Configuration. The main area contains configuration fields for Vendor (Oracle), Driver (\*Oracle's Driver (Thin) for Service connections; Ve...), DBMS/Service (ER.US.ORACLE.COM), Host Name (slc03jib.us.oracle.com), Port (1521), Schema Owner (Varies among com), and Schema Password (\*\*\*\*\*). Below these are radio buttons for Oracle RAC configuration: Convert to GridLink, Convert to RAC multi data source, and Don't convert. A table lists the component schemas to be configured:

|                                     | Component Schema    | DBMS/Service | Host Name        | Port | Schema Ow... | Schema Passw... |
|-------------------------------------|---------------------|--------------|------------------|------|--------------|-----------------|
| <input checked="" type="checkbox"/> | LocalSvcTbl Schema  | IDMAKER.US.C | slc03jib.us.orac | 1521 | DEV_STB      | *****           |
| <input checked="" type="checkbox"/> | OPSS Audit Schema   | IDMAKER.US.C | slc03jib.us.orac | 1521 | DEV_IJU_APP  | *****           |
| <input checked="" type="checkbox"/> | OPSS Audit Viewer S | IDMAKER.US.C | slc03jib.us.orac | 1521 | DEV_IJU_VIEW | *****           |
| <input checked="" type="checkbox"/> | OPSS Schema         | IDMAKER.US.C | slc03jib.us.orac | 1521 | DEV_OPSS     | *****           |

Buttons at the bottom include Help, < Back, Next >, Finish, and Cancel.


9. Select 'Test Selected Connections' button. If test is successful, then click Next.

The screenshot shows the 'JDBC Component Schema Test' window. The left sidebar is the same as in the previous screen. The main area displays a table with test results:


| Status                              | Component Schema    | JDBC Connection URL                                               |
|-------------------------------------|---------------------|-------------------------------------------------------------------|
| <input checked="" type="checkbox"/> | LocalSvcTbl Schema  | jdbc:oracle:thin:@//slc03jib.us.oracle.com:1521/IDMAKER.US.ORACLE |
| <input checked="" type="checkbox"/> | OPSS Audit Schema   | jdbc:oracle:thin:@//slc03jib.us.oracle.com:1521/IDMAKER.US.ORACLE |
| <input checked="" type="checkbox"/> | OPSS Audit Viewer : | jdbc:oracle:thin:@//slc03jib.us.oracle.com:1521/IDMAKER.US.ORACLE |
| <input checked="" type="checkbox"/> | OPSS Schema         | jdbc:oracle:thin:@//slc03jib.us.oracle.com:1521/IDMAKER.US.ORACLE |

Buttons include Test Selected Connections, Cancel Testing, and a Connection Result Log area showing details for the LocalSvcTbl Schema test, including the SQL Test=SELECT 1 FROM DUAL and a successful result message. Bottom buttons are Help, < Back, Next >, Finish, and Cancel.


10. Click 'Next'.

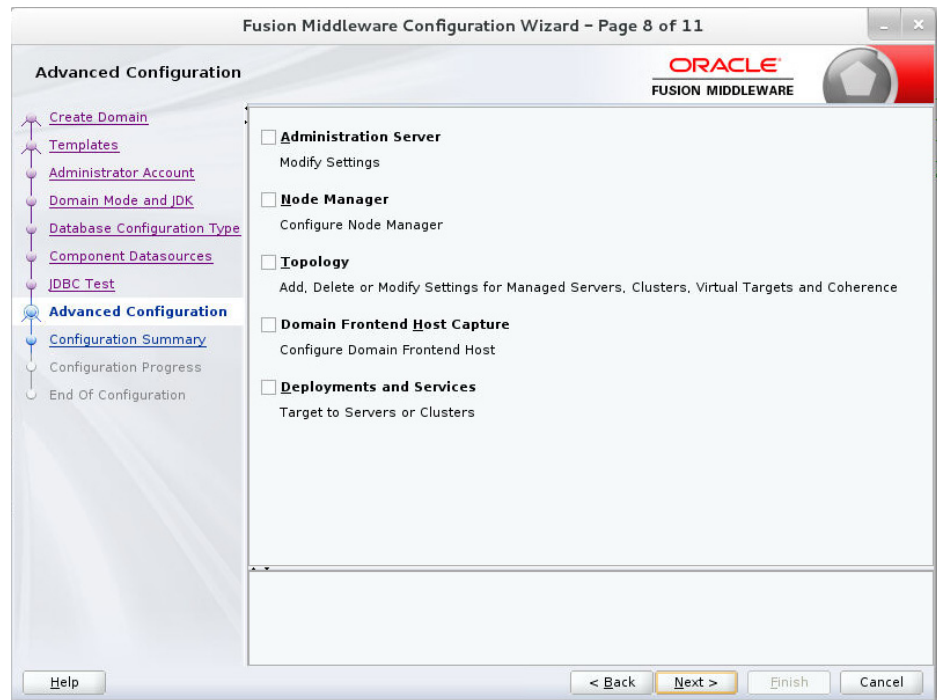


11. Click 'Create'.

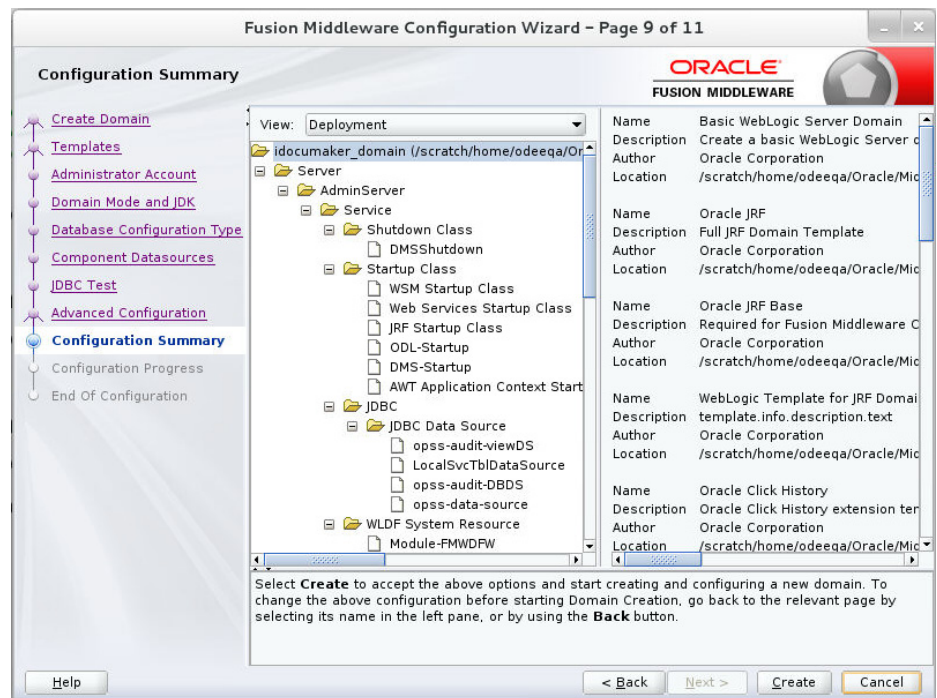


Configuration progress bar appears.

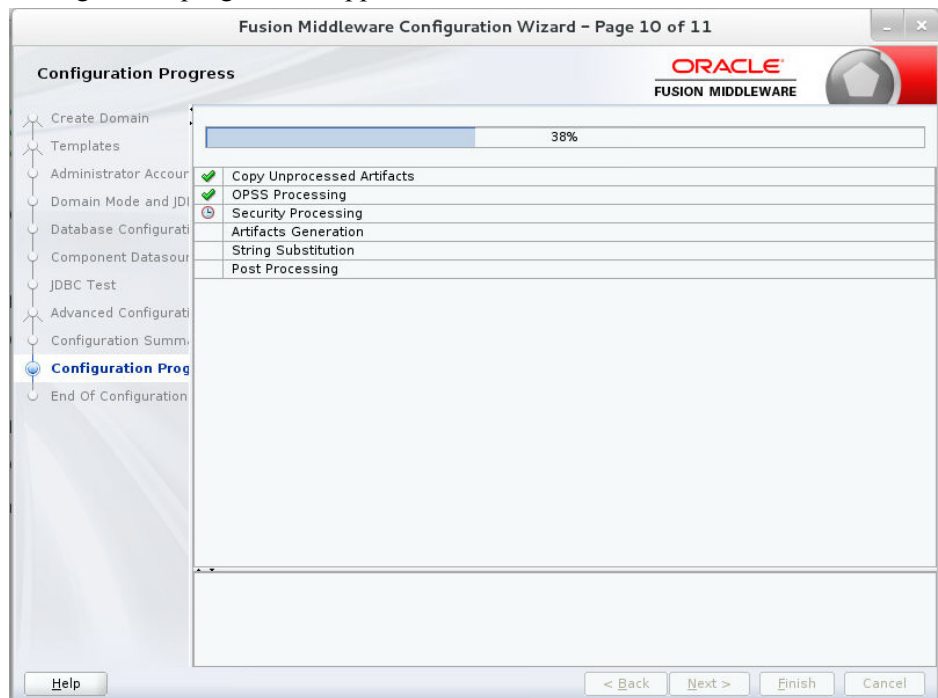

12. Click 'Next'.

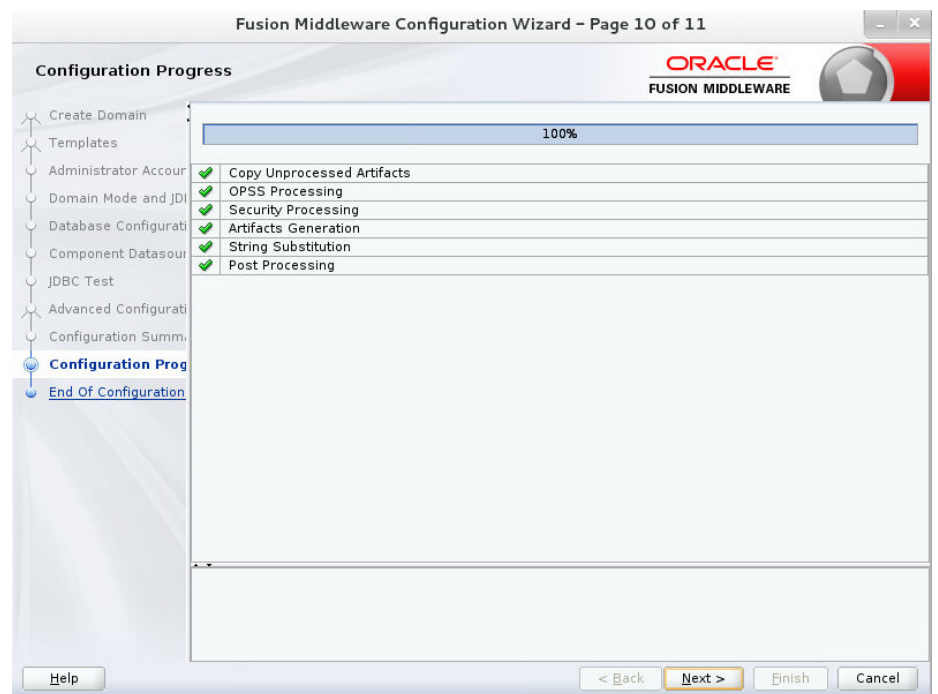

13. Click 'Finish' to complete the configuration.

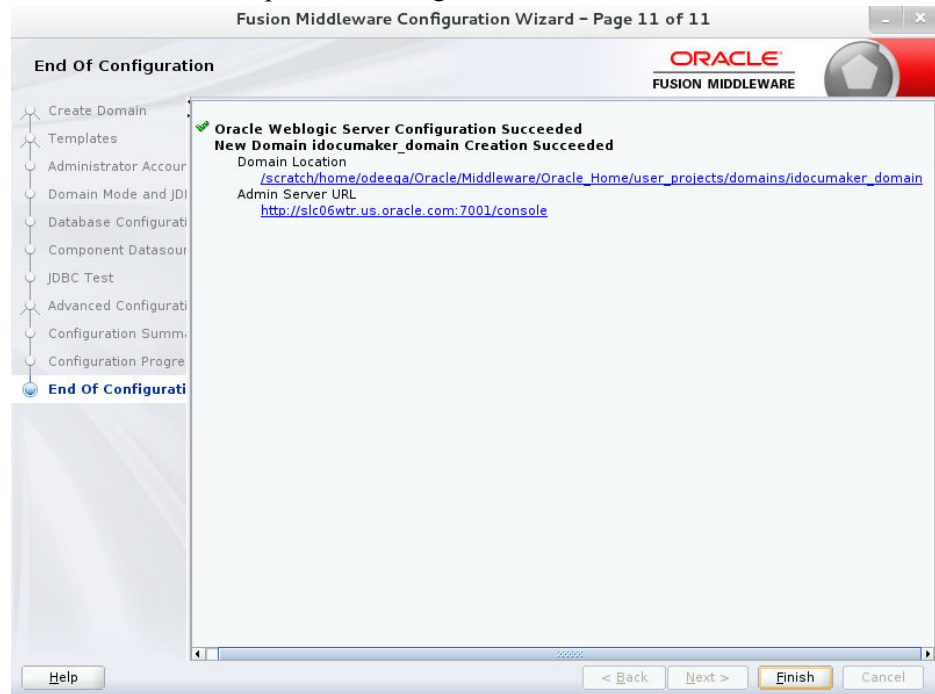

Information on Navigating Configuration Wizard Screens to Configure the Domain is also available on

<https://docs.oracle.com/middleware/12212/lcm/INFIN/GUID-CA80A6E9-8903-4E19-81D7-A3647A11D0A6.htm#INFIN293>

---

## Appendix C

---

### Certificates

Security with Secure Sockets Layer (SSL) or Transport Layer Security (TLS) are based on trust.

A computer is allowed to establish a secure connection to a service because the service presents a digital file (certificate) that is digitally "fingerprinted" by a Certificate Authority (CA).

The CA has the responsibility of verifying that applicants for a certificate are who they say they are.

A CA uses a private key to sign every certificate they issue (the aforementioned fingerprint), so that every certificate they issue can be traced back to them. This works by using the CA's public key to validate that a certificate is indeed valid. Services are deployed, by default, with demo certificates.

---

|             |                                                                                                                                                                                   |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Note</b> | The demo certificate that ships with Documaker is not a trusted CA; it is self-generated. As such, the hostname of the certificate will not match the hostname on the connection. |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

---

Most browsers have a trust store that is configured with the necessary fingerprints for CAs that you would need.

In order for a browser to connect successfully to websites with SSL, (e.g. using HTTPS scheme in URL), one (or more) of the solutions can be used:

1. All users' browsers must have the trust store configured with the public key of the root certificate used to generate self-signed certificates, and all services secured by SSL must use certificates generated signed this root certificate.

This is usually an acceptable solution when the number of users is small, or the company has desktop configuration via push enabled, or when the company generates their own internal self-signed certificates to use for non-public facing services.

2. All users' trust stores can be modified to trust the demo certificate.

This is usually an acceptable solution in short-lived non-production environments.

It is not recommended to add the demo certificate to user trust stores, as a malicious user could compromise the secure connection by presenting a certificate signed with the same demo root key.

3. Services are configured with certificates issued by CAs that are in the shipping trust store of common browsers. This is usually the solution where services will be public facing. This can be expensive and cumbersome as certificates are issued to specific host names. However, it is almost universally sufficient.

Information on Secure Socket Layer is also available in the Oracle [Documaker Enterprise Security Guide](#).

## Appendix D

---

### Legal Notices

#### THIRD PARTY SOFTWARE NOTICES

This product includes software developed by Apache Software Foundation (<http://www.apache.org/>).

THIS SOFTWARE IS PROVIDED "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright © 2000-2009 The Apache Software Foundation. All rights reserved.

Apache Commons Math Copyright 2001-2008 The Apache Software Foundation

This product includes software translated from the odex Fortran routine developed by E. Hairer and G. Wanner and distributed under the following license:

Copyright (c) 2004, Ernst Hairer

---

Apache License Version 2.0, January 2004 (<http://www.apache.org/licenses/LICENSE-2.0>)

THIS SOFTWARE IS PROVIDED "AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE VISIGOTH SOFTWARE SOCIETY OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Apache Commons Codec Copyright 2002-2009 The Apache Software Foundation  
Copyright (C) 2002 Kevin Atkinson ([kevina@gnu.org](mailto:kevina@gnu.org))

Apache Commons Pool  
Copyright 2001-2011 The Apache Software Foundation

Apache Jakarta Commons Lang  
Copyright 2001-2007 The Apache Software Foundation

Apache Jakarta Commons FileUpload  
Copyright 2002-2006 The Apache Software Foundation

Apache Commons CLI  
Copyright 2001-2009 The Apache Software Foundation

Apache Commons Collections  
Copyright 2001-2008 The Apache Software Foundation

Apache Commons Logging  
Copyright 2003-2013 The Apache Software Foundation

Barcode4J  
Copyright 2002-2010 Jeremias Märki  
Copyright 2005-2006 Dietmar Bürkle  
Portions of this software were contributed under section 5 of the  
Apache License. Contributors are listed under: (<http://barcode4j.sourceforge.net/contributors.html>)  
Copyright 2002-2010 The Apache Software Foundation

---

This product includes software distributed via the Berkeley Software Distribution (BSD) and licensed for binary distribution under the Generic BSD license.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright © 2009, Berkeley Software Distribution (BSD)

---

This product includes software developed by the JDOM Project (<http://www.jdom.org/>).

THIS SOFTWARE IS PROVIDED "AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE JDOM AUTHORS OR THE PROJECT CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (C) 2000-2004 Jason Hunter & Brett McLaughlin. All rights reserved.

---

This product includes software developed by the Massachusetts Institute of Technology (MIT).  
THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND,

EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright © 2009 MIT

---

This product includes software developed by Jean-loup Gailly and Mark Adler. This software is provided 'as-is', without any express or implied warranty. In no event will the authors be held liable for any damages arising from the use of this software.

Copyright (c) 1995-2005 Jean-loup Gailly and Mark Adler

---

This software is based in part on the work of the Independent JPEG Group (<http://www.ijg.org>).

---

This product includes software developed by the Dojo Foundation (<http://dojotoolkit.org>).

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (c) 2005-2009, The Dojo Foundation. All rights reserved.

---

This product includes software developed by W3C.

Copyright © 2009 World Wide Web Consortium, (Massachusetts Institute of Technology, Institut National de Recherche en Informatique et en Automatique, Keio University). All Rights Reserved. (<http://www.w3.org/Consortium/Legal/>)

---

This product includes software developed by Mathew R. Miller (<http://www.bluecreststudios.com>).

Copyright (c) 1999-2002 ComputerSmarts. All rights reserved.

---

This product includes software developed by Shaun Wilde and distributed via Code Project Open License (<http://www.codeproject.com>).

THIS WORK IS PROVIDED "AS IS", "WHERE IS" AND "AS AVAILABLE", WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES OR CONDITIONS OR GUARANTEES. YOU, THE USER, ASSUME ALL RISK IN ITS USE, INCLUDING COPYRIGHT INFRINGEMENT, PATENT INFRINGEMENT, SUITABILITY, ETC. AUTHOR EXPRESSLY DISCLAIMS ALL EXPRESS, IMPLIED OR STATUTORY WARRANTIES

OR CONDITIONS, INCLUDING WITHOUT LIMITATION, WARRANTIES OR CONDITIONS OF MERCHANTABILITY, MERCHANTABLE QUALITY OR FITNESS FOR A PARTICULAR PURPOSE, OR ANY WARRANTY OF TITLE OR NON-INFRINGEMENT, OR THAT THE WORK (OR ANY PORTION THEREOF) IS CORRECT, USEFUL, BUG-FREE OR FREE OF VIRUSES. YOU MUST PASS THIS DISCLAIMER ON WHENEVER YOU DISTRIBUTE THE WORK OR DERIVATIVE WORKS.

---

This product includes software developed by Chris Maunder and distributed via Code Project Open License (<http://www.codeproject.com>).

THIS WORK IS PROVIDED "AS IS", "WHERE IS" AND "AS AVAILABLE", WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES OR CONDITIONS OR GUARANTEES. YOU, THE USER, ASSUME ALL RISK IN ITS USE, INCLUDING COPYRIGHT INFRINGEMENT, PATENT INFRINGEMENT, SUITABILITY, ETC. AUTHOR EXPRESSLY DISCLAIMS ALL EXPRESS, IMPLIED OR STATUTORY WARRANTIES OR CONDITIONS, INCLUDING WITHOUT LIMITATION, WARRANTIES OR CONDITIONS OF MERCHANTABILITY, MERCHANTABLE QUALITY OR FITNESS FOR A PARTICULAR PURPOSE, OR ANY WARRANTY OF TITLE OR NON-INFRINGEMENT, OR THAT THE WORK (OR ANY PORTION THEREOF) IS CORRECT, USEFUL, BUG-FREE OR FREE OF VIRUSES. YOU MUST PASS THIS DISCLAIMER ON WHENEVER YOU DISTRIBUTE THE WORK OR DERIVATIVE WORKS.

---

This product includes software developed by PJ Arends and distributed via Code Project Open License (<http://www.codeproject.com>).

THIS WORK IS PROVIDED "AS IS", "WHERE IS" AND "AS AVAILABLE", WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES OR CONDITIONS OR GUARANTEES. YOU, THE USER, ASSUME ALL RISK IN ITS USE, INCLUDING COPYRIGHT INFRINGEMENT, PATENT INFRINGEMENT, SUITABILITY, ETC. AUTHOR EXPRESSLY DISCLAIMS ALL EXPRESS, IMPLIED OR STATUTORY WARRANTIES OR CONDITIONS, INCLUDING WITHOUT LIMITATION, WARRANTIES OR CONDITIONS OF MERCHANTABILITY, MERCHANTABLE QUALITY OR FITNESS FOR A PARTICULAR PURPOSE, OR ANY WARRANTY OF TITLE OR NON-INFRINGEMENT, OR THAT THE WORK (OR ANY PORTION THEREOF) IS CORRECT, USEFUL, BUG-FREE OR FREE OF VIRUSES. YOU MUST PASS THIS DISCLAIMER ON WHENEVER YOU DISTRIBUTE THE WORK OR DERIVATIVE WORKS.

---

This product includes software developed by Erwin Tratar. This source code and all accompanying material is copyright (c) 1998-1999 Erwin Tratar. All rights reserved. THIS SOFTWARE IS PROVIDED "AS IS" WITHOUT EXPRESS OR IMPLIED WARRANTY. USE IT AT YOUR OWN RISK! THE AUTHOR ACCEPTS NO LIABILITY FOR ANY DAMAGE/LOSS OF BUSINESS THAT THIS PRODUCT MAY CAUSE.

---

This product includes software developed by Sam Leffler of Silicon Graphics.

THE SOFTWARE IS PROVIDED "AS IS" AND WITHOUT WARRANTY OF ANY KIND, EXPRESS, IMPLIED OR OTHERWISE, INCLUDING WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

IN NO EVENT SHALL SAM LEFFLER OR SILICON GRAPHICS BE LIABLE FOR ANY SPECIAL, INCIDENTAL, INDIRECT OR CONSEQUENTIAL DAMAGES OF ANY KIND, OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER OR NOT ADVISED OF THE POSSIBILITY OF DAMAGE, AND ON ANY THEORY OF LIABILITY, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE

Copyright (c) 1988-1997 Sam Leffler  
Copyright (c) 1991-1997 Silicon Graphics, Inc.

---

This product includes software developed by Guy Eric Schalnat, Andreas Dilger, Glenn Randers-Pehrson (current maintainer), and others. (<http://www.libpng.org>)

The PNG Reference Library is supplied "AS IS". The Contributing Authors and Group 42, Inc. disclaim all warranties, expressed or implied, including, without limitation, the warranties of merchantability and of fitness for any purpose. The Contributing Authors and Group 42, Inc. assume no liability for direct, indirect, incidental, special, exemplary, or consequential damages, which may result from the use of the PNG Reference Library, even if advised of the possibility of such damage.

---

This product includes software components distributed by the Cryptix Foundation.

THIS SOFTWARE IS PROVIDED BY THE CRYPTIX FOUNDATION LIMITED AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE CRYPTIX FOUNDATION LIMITED OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE

Copyright © 1995-2005 The Cryptix Foundation Limited. All rights reserved.

---

This product includes software components distributed by Sun Microsystems.

This software is provided "AS IS," without a warranty of any kind. ALL EXPRESS OR IMPLIED CONDITIONS, REPRESENTATIONS AND WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT, ARE HEREBY EXCLUDED. SUN AND ITS LICENSORS SHALL NOT BE LIABLE FOR ANY DAMAGES SUFFERED BY LICENSEE AS A RESULT OF USING, MODIFYING OR DISTRIBUTING THE SOFTWARE OR ITS DERIVATIVES. IN NO EVENT WILL SUN OR ITS LICENSORS BE LIABLE FOR ANY LOST REVENUE, PROFIT OR DATA, OR FOR DIRECT, INDIRECT, SPECIAL, CONSEQUENTIAL, INCIDENTAL OR PUNITIVE DAMAGES, HOWEVER CAUSED AND REGARDLESS OF THE THEORY OF LIABILITY, ARISING OUT OF THE USE OF OR INABILITY TO USE SOFTWARE, EVEN IF SUN HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Copyright (c) 1998 Sun Microsystems, Inc. All Rights Reserved.

---

This product includes software components distributed by Dennis M. Sosnoski.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,

PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright © 2003-2007 Dennis M. Sosnoski. All Rights Reserved

It also includes materials licensed under Apache 1.1 and the following XPP3 license

THIS SOFTWARE IS PROVIDED "AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright © 2002 Extreme! Lab, Indiana University. All Rights Reserved

---

This product includes software components distributed by CodeProject. This software contains material that is © 1994-2005 The Ultimate Toolbox, all rights reserved.

---

This product includes software components distributed by Geir Landro.

Copyright © 2001-2003 Geir Landro (drop@destroydrop.com) JavaScript Tree -  
[www.destroydrop.com/hjascripts/tree/version 0.96](http://www.destroydrop.com/hjascripts/tree/version 0.96)

---

This product includes software components distributed by the Hypersonic SQL Group.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE

Copyright © 1995-2000 by the Hypersonic SQL Group. All Rights Reserved

---

This product includes software components distributed by the International Business Machines Corporation and others.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND

NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright (c) 1995-2009 International Business Machines Corporation and others. All rights reserved.

---

This product includes software components distributed by the University of Coimbra.

University of Coimbra distributes this software in the hope that it will be useful but DISCLAIMS ALL WARRANTIES WITH REGARD TO IT, including all implied warranties of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. In no event shall University of Coimbra be liable for any special, indirect or consequential damages (or any damages whatsoever) resulting from loss of use, data or profits, whether in an action of contract, negligence or other tortious action, arising out of or in connection with the use or performance of this software.

Copyright (c) 2000 University of Coimbra, Portugal. All Rights Reserved.

---

This product includes software components distributed by Steve Souza.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright © 2002, Steve Souza (admin@jamonapi.com). All Rights Reserved.

---

This product includes software developed by the OpenSymphony Group (<http://www.opensymphony.com/>.)"

Copyright © 2001-2004 The OpenSymphony Group. All Rights Reserved.

---

PANTONE (R) Colors displayed in the software application or in the user documentation may not match PANTONE-identified standards. Consult current PANTONE Color Publications for accurate color. PANTONE(R) and other Pantone LLC trademarks are the property of Pantone LLC. (C) Pantone LLC, 2011.

Pantone LLC is the copyright owner of color data and/or software which are licensed to Oracle to distribute for use only in combination with Oracle Documaker. PANTONE Color Data and/or Software shall not be copied onto another disk or into memory unless part of the execution of Oracle Documaker.

---

This product includes software developed by Dave Gamble and distributed via

SourceForge.net (<http://sourceforge.net/projects/cjson/>)

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright (c) 2009 Dave Gamble

---

This product includes software developed by the Zxing Project.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright (c) 2013 Zxing Project (<https://github.com/zxing/zxing>)

---

This product includes software developed by the Wintertree software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

The Sentry Spelling-Checker Engine Copyright (c) 1993 Wintertree (<https://wintertree-software.com/dev/ssce/windows/index.html> )

---

Freemarker Copyright (c) 2003 The Visigoth Software Society. All rights reserved.

THIS SOFTWARE IS PROVIDED "AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE VISIGOTH SOFTWARE SOCIETY OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This software consists of voluntary contributions made by many individuals on behalf of the

Visigoth Software Society. For more information on the Visigoth Software Society, please see <http://www.visigoths.org/>

---

Copyright (c) 2000,2002,2003 INRIA, France Telecom ( <http://asm.ow2.org/>) All rights reserved.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

---

Copyright© 2001-2016 ej-technologies GmbH (<https://www.ej-technologies.com/products/install4j/overview.html>) All rights reserved.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This component is distributed with the following third party components: (1) Third party components licensed under EPL v1.0; (2) JARGS (Stephen Purcell); JDOM (Brett McLaughlin & Jason Hunter); and (3) ORO (Apache Software Foundation). Please see EPL v1.0 and applicable components (#2072, 2686, 2074) for restrictions/requirements.

---

Copyright 2001-2005 (C) MetaStuff, Ltd.(<http://www.dom4j.org>) All Rights Reserved.

THIS SOFTWARE IS PROVIDED BY METASTUFF, LTD. AND CONTRIBUTORS "AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL METASTUFF, LTD. OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN

CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

---

Little CMS Copyright (c) 1998-2011 (<http://www.littlecms.com/>) All Rights Reserved.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Marti Maria Sagner Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

---

Copyright (c) 2002-2007, Communications and Remote Sensing Laboratory, Universite catholique de Louvain (UCL), Belgium

Copyright (c) 2002-2007, Professor Benoit Macq

Copyright (c) 2001-2003, David Janssens

Copyright (c) 2002-2003, Yannick Verschueren

Copyright (c) 2003-2007, Francois-Olivier Devaux and Antonin Descampe

Copyright (c) 2005, Herve Drolon, FreeImage Team

All rights reserved.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

---

Copyright (c) 2004-2013 QOS.ch (<http://www.qos.ch/shop/index>) All rights reserved.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

---

The Code Project Open License (CPOL) 1.02

Copyright © CodeProject, 1999-2016 (<http://www.codeproject.com/info/cpol10.aspx>) All Rights Reserved.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

---

Copyright (c) 1998, 1999, 2000 Thai Open Source Software Center Ltd and Clark Cooper

Copyright (c) 2001, 2002, 2003, 2004, 2005, 2006 Expat maintainers (<http://expat.sourceforge.net/>)

All Rights Reserved.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

---

Copyright (c) 2002-2010 Atsuhiko Yamanaka, JCraft, Inc. (<http://www.jcraft.com/jsch/>) All rights reserved.

THIS SOFTWARE IS PROVIDED "AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL JCRAFT, INC. OR ANY CONTRIBUTORS TO

THIS SOFTWARE BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

---

This product includes software developed by Christian Bach and distributed via (<http://tablesorter.com/docs/>)

All rights reserved.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright (c) 2007 Christian Bach

---

This product includes software developed by Dmitry Baranovskiy and distributed via (<https://github.com/DmitryBaranovskiy>)

All rights reserved.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright © 2008 Dmitry Baranovskiy.

---

This product includes software developed by John Resig and distributed via (<http://jquery.com/>) All rights reserved.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright (c) 2011 John Resig

---

Copyright (c) Monotype Imaging, Inc (<http://www.monotype.com/>) All rights reserved.

Monotype®, Albany®, Andale®, Cumberland®, Thorndale®, MT®, WorldType® is a trademark of Monotype Imaging, Inc., registered in U.S. Patent and Trademark Office and certain other jurisdictions.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

---

# Index

## A

Advanced Compression Options 23, 51

Assembly Line

Database Schema window 19, 47

ID field 19, 48

Name field 19, 48

## B

bin directory 11

bpel directory 12

## C

Configuration Summary window 36, 63

Configure JDBC Component Schema window 35, 63

conventions 7

Correspondence MRL 17, 45

credentials 38, 66

Credentials window 45

## D

dashboard directory 12

database directory 11

Database Information window 18, 46

database scripts 23, 28, 51, 56

DB Folder Location field 19, 47

deploysamplemrl

.bat file 24, 29, 57

script 52

directories

installation 11

dmkr\_asline.sql script 23, 28, 51, 56

dmrk\_admin.sql script 23, 28, 51, 56

docfactory directory 11

Documaker Administrator

and WebLogic 30, 57

overview 9

documaker directory 11

Documaker Enterprise

architecture 10

overview 9

Documaker Interactive

and WebLogic 30, 57

overview 9

documaker\_administrator directory 12

documakerj2ee directory 12

Document Factory

overview 9

Document Factory Dashboard

and WebLogic 30, 57

credentials 38, 66

overview 9

documentation

downloading 70

## E

EAR files

defined 12

email address 21, 49

error logs 22, 50

## F

filesystem-archive directory 11

## H

Help

changing the location 68

helpLink property 68

Hot Folder window 20, 49

HotDirectories property 11

hotdirectory directory 11

HotFolder path 20, 49

## I

idocumaker\_correspondence directory 12

installActions file 22, 50

installation

pre-installation steps 14, 41

## J

j2ee directory 11

JAR files

defined 12

Java Naming and Directory Interface (JNDI)

31, 58

JMS Connection Class field 48

JMS Provider URL Protocol field 48

JMS Setup window 20, 48

jre directory 11

## L

loading the MRL 23, 51

## M

mstres directory 11

Multipurpose Internet Mail Extensions (MIME)

37, 64

## O

Optional Oracle (UMS) Information window 21, 50

Optional UCM Information window 21, 49

Oracle Business Rules

composites 36, 63

deploying 36, 63

Oracle database

- requirements 14
- Oracle Documaker Interactive
  - credentials 38, 66
- Oracle Service Oriented Architecture (SOA)
  - deploying 35, 62
- Oracle Technology Network (OTN) 68
- Oracle Universal Content Management (UCM) 15, 42
- oracle\_instantclient\_11\_2 directory 11
- OTN web site 70

## **P**

- patches
  - downloading 69
- preface 5
- putURL property 65
- py files 32, 59

## **R**

- Registration/Administrator Database Schema window 18, 47

## **S**

- scripts 12, 23, 28, 51, 56
- Select Extension Source window 35, 62
- Select Optional Configuration window 36, 63
- set\_middleware\_env.cmd file 58
- Short Message System (SMS) 15, 42
- SMTP Email Server dialog 21, 49
- SMTP Host field 49
- SMTP Password field 49
- SMTP Port field 49
- SMTP Sender field 49

- SMTP User field 49
- Specify Home Details window 17
- Specify Inventory directory 45
- Summary dialog 22, 50

## **U**

- UCM Connection String field 50
- UCM Document URL field 50
- UMS Endpoint field 50
- UMS Password field 50
- UMS User field 50
- Unified Messaging Service (UMS) 15, 42
- uninstall the software 71
- updates
  - downloading 69
- Use UCM field 49
- Use UMS field 21, 50
- user accounts 32, 59

## **V**

- Visual C++ Redistributable Package 14

## **W**

- Web Services window 22
- WebLogic
  - creating the domain 30, 57
  - Help location 68
  - Managed Server 34, 61
- WebLogic Domain Directory window 35, 62
- weblogic\_installation.properties file 30, 58
- WIP Edit plug-in
  - configuring 37, 64, 65