

**Oracle® Retail Store Inventory Operations Cloud
Services**

Implementation Guide

Release 22.1.201.0

F55041-04

September 2022

Primary Author: Tracy Gunston

Contributing Author: Bipin Pradhan

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Value-Added Reseller (VAR) Language

Oracle Retail VAR Applications

The following restrictions and provisions only apply to the programs referred to in this section and licensed to you. You acknowledge that the programs may contain third party software (VAR applications) licensed to Oracle. Depending upon your product and its version number, the VAR applications may include:

- (i) the **MicroStrategy** Components developed and licensed by MicroStrategy Services Corporation (MicroStrategy) of McLean, Virginia to Oracle and imbedded in the MicroStrategy for Oracle Retail Data Warehouse and MicroStrategy for Oracle Retail Planning & Optimization applications.
- (ii) the **Wavelink** component developed and licensed by Wavelink Corporation (Wavelink) of Kirkland, Washington, to Oracle and imbedded in Oracle Retail Mobile Store Inventory Management.
- (iii) the software component known as **Access Via**™ licensed by Access Via of Seattle, Washington, and imbedded in Oracle Retail Signs and Oracle Retail Labels and Tags.
- (iv) the software component known as **Adobe Flex**™ licensed by Adobe Systems Incorporated of San Jose, California, and imbedded in Oracle Retail Promotion Planning & Optimization application.

You acknowledge and confirm that Oracle grants you use of only the object code of the VAR Applications. Oracle will not deliver source code to the VAR Applications to you. Notwithstanding any other term or condition of the agreement and this ordering document, you shall not cause or permit alteration of any VAR

Applications. For purposes of this section, "alteration" refers to all alterations, translations, upgrades, enhancements, customizations or modifications of all or any portion of the VAR Applications including all reconfigurations, reassembly or reverse assembly, re-engineering or reverse engineering and recompilations or reverse compilations of the VAR Applications or any derivatives of the VAR Applications. You acknowledge that it shall be a breach of the agreement to utilize the relationship, and/or confidential information of the VAR Applications for purposes of competitive discovery.

The VAR Applications contain trade secrets of Oracle and Oracle's licensors and Customer shall not attempt, cause, or permit the alteration, decompilation, reverse engineering, disassembly or other reduction of the VAR Applications to a human perceivable form. Oracle reserves the right to replace, with functional equivalent software, any of the VAR Applications in future releases of the applicable program.

Contents

Send Us Your Comments	ix
Preface	xi
Audience	xi
Documentation Accessibility	xi
Related Documents	xi
Improved Process for Oracle Retail Documentation Corrections	xii
Oracle Retail Documentation at the Oracle Help Center	xii
Conventions	xii
1 Oracle SIOCS Implementation Overview	
Noteworthy Differences between V16.x/on premise (SIM) and SIOCS V19.x (GBUCS cloud)	1-2
Noteworthy Differences between SIOCS V19.x (GBUCS cloud) and SIOCS V22.x (Gen2SaaS)	1-2
Oracle Retail Integration Components	1-3
Implementation Considerations	1-3
URL Reference	1-3
2 Setup Users	
Terminology	2-1
User Types and Responsibilities	2-2
User Access Control	2-2
Assign Customer-Cloud-Admin User and Security-Admin User	2-2
Assign Implementation Users	2-3
Assign Store Users	2-3
3 Signing into EICS	
Login Screen	3-1
Successful Login	3-1
Un-Successful Login	3-1
4 System Configurations	
Summary of Admin System Configurations Topics	4-1

Admin Configurations	4-2
Audit Configurations	4-2
Batch Configurations	4-2
Batch File Configurations.....	4-2
Functional Areas Related Configurations	4-2
Message Processing Configurations.....	4-3
Mobile Configurations.....	4-3
Notification Configurations.....	4-3
Purge Configurations	4-4
System and Integration Web Service Configurations.....	4-4
Time Zone Configurations	4-4
UI Configurations	4-4
5 Batch Job Admin	
Batch Scheduler	5-1
Batch Activity	5-1
Cleanup Batches	5-1
6 Initial Data Seeding	
Initial Data Seeding.....	6-1
7 SIOCS UI Spreadsheet Data Loader	
Upload Store Assignments.....	7-1
Spreadsheet Templates.....	7-1
Upload Role Assignments	7-1
Spreadsheet Templates.....	7-2
8 Report Configurations	
9 Store Configurations	
10 Mobile Application (SOCS)	
Configure Manual Quantity Entry Mode.....	10-1
Enable Mobile Functionalities.....	10-1
11 Internationalization and Localization	
12 Operational Monitoring	
View Operational Issues through EICS Admin UI	12-1
EICS DB Data Viewer User	12-1
13 Integrations	
Pricing Integration with Retail Pricing Cloud Service	13-1
Stock Count Export Integration with MFCS.....	13-2

Sale Data Integration with POS and ReSA	13-2
Web Service: Integration with Manifest System	13-2
Web Service: Integration with External System for Ticket Printing	13-3
ZPL	13-3
Non-ZPL Printing	13-4
RIB Integration Guidance (From SIOCS Perspective)	13-4
Overview	13-4
Unsupported Messages and Payloads	13-5
Unsupported Data within Messages and Payloads	13-5
Errors.....	13-5
Modify/Delete.....	13-5
Message Family/Type.....	13-5
Other Integration Interfaces	13-10
Standalone Deployment - Integration with on-premise RMS/RIB	13-11
14 Customization and Extension	
Customization and Extension Considerations	14-1
Code Customization	14-1
15 File Transfer Services	
Overview.....	15-1
16 Logs	
EICS Log Debug Settings	16-1
Server Log File Locations.....	16-1
17 Troubleshooting Tips	
Application Login Troubleshooting	17-1
Report Troubleshooting	17-2
RIB (Retail Integration Cloud Service / RICS) Troubleshooting.....	17-2
Web Service Troubleshooting.....	17-2
References.....	17-2
A Appendix: Accessibility	
Enterprise Inventory Cloud Service (EICS)	A-1
Store Operations Cloud Service (SOCS)	A-2
B Appendix: Oracle APEX	
What is Oracle APEX?.....	B-1
Suggested APEX Usage in Store Inventory Operations Cloud Service.....	B-1
SQL Workshop	B-2
APEX Users, Administration	B-3
APEX Installation Admin	B-3
APEX Customer Admin/Developer	B-3

Database Objects B-4

Send Us Your Comments

Oracle Retail Store Inventory Operations Cloud Services Implementation Guide,
Release 22.1.201.0

Oracle welcomes customers' comments and suggestions on the quality and usefulness of this document.

Your feedback is important, and helps us to best meet your needs as a user of our products. For example:

- Are the implementation steps correct and complete?
- Did you understand the context of the procedures?
- Did you find any errors in the information?
- Does the structure of the information help you with your tasks?
- Do you need different information or graphics? If so, where, and in what format?
- Are the examples correct? Do you need more examples?

If you find any errors or have any other suggestions for improvement, then please tell us your name, the name of the company who has licensed our products, the title and part number of the documentation and the chapter, section, and page number (if available).

Note: Before sending us your comments, you might like to check that you have the latest version of the document and if any concerns are already addressed. To do this, access the Online Documentation available on the Oracle Help Center (OHC) website. It contains the most current Documentation Library plus all documents revised or released recently.

Send your comments to us using the electronic mail address: retail-doc_us@oracle.com

Please give your name, address, electronic mail address, and telephone number (optional).

If you need assistance with Oracle software, then please contact your support representative or Oracle Support Services.

If you require training or instruction in using Oracle software, then please contact your Oracle local office and inquire about our Oracle University offerings. A list of Oracle offices is available on our web site at <http://www.oracle.com>.

Preface

This document provides critical information about the processing and operating details of Oracle Retail Store Inventory Operations Cloud Services.

Audience

This document is for:

- Systems administration and operations personnel
- Systems analysts
- Integrators and implementers

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

Related Documents

For more information, see the following documents in the Oracle Retail Store Inventory Operations Cloud Services Release 22.1.201.0 documentation set:

- *Oracle Retail Enterprise Inventory Cloud Service Administration Guide*
- *Oracle Retail Enterprise Inventory Cloud Service Security Guide*
- *Oracle Retail Enterprise Inventory Cloud Service User Guide*
- *Oracle Retail Store Inventory Operations Cloud Services Release Notes*
- *Oracle Retail Store Inventory Operations Cloud Services Data Model*
- *Oracle Retail Store Operations Cloud Service Mobile Guide*
- *Oracle Retail Store Operations Cloud Service User Guide*

Improved Process for Oracle Retail Documentation Corrections

To more quickly address critical corrections to Oracle Retail documentation content, Oracle Retail documentation may be republished whenever a critical correction is needed. For critical corrections, the republication of an Oracle Retail document may at times not be attached to a numbered software release; instead, the Oracle Retail document will simply be replaced at the Oracle Help Center (OHC) website, or, in the case of Data Models, to the applicable My Oracle Support Documentation container where they reside.

This process will prevent delays in making critical corrections available to customers. For the customer, it means that before you begin installation, you must verify that you have the most recent version of the Oracle Retail documentation set. Oracle Retail documentation is available at the Oracle Help Center at the following URL:

<https://docs.oracle.com/en/industries/retail/index.html>

An updated version of the applicable Oracle Retail document is indicated by Oracle part number, as well as print date (month and year). An updated version uses the same part number, with a higher-numbered suffix. For example, part number F123456-02 is an updated version of a document with part number F123456-01.

If a more recent version of a document is available, that version supersedes all previous versions.

Oracle Retail Documentation at the Oracle Help Center

Oracle Retail product documentation is available on the following website:

<https://docs.oracle.com/en/industries/retail/index.html>

(Data Model documents are not available through Oracle Help Center. You can obtain them through My Oracle Support.)

Conventions

The following text conventions are used in this document:

Convention	Meaning
boldface	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
monospace	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

Oracle SIOCS Implementation Overview

EICS (Enterprise Inventory Cloud Service) and SOCS (Store Operations Cloud Service) are two separately licensed products.

EICS includes:

- EICS Browser Client
- EICS Web Services
- EICS Server Tier
- EICS Database tier with data access code, batches, reports

SOCS includes:

- Oracle MAF Client

In order to use SOCS, EICS needs to be deployed.

The implementation process includes a needs assessment, business impact analysis, requirements gathering, and other activities. However, this document is concerned only with the specific aspects of a technical implementation. In a typical project life cycle, technical implementations can begin only after the environment has been provisioned. Once a subscription agreement has been signed and Service Activation Request is logged, the Oracle Cloud team will start the provisioning process.

Once the account is provisioned, the Oracle Cloud team provides the following:

- URL to access the EICS Application User Interface (UI) for production and staging environments.
- One Customer Delegate Administrator user account.
- URLs to access the various web services associated with the staging and production environments.

Noteworthy Differences between V16.x/on premise (SIM) and SIOCS V19.x (GBUCS cloud)

- **UI:** No Wavelink UI, No Swing UI. Uses Oracle JET (JavaScript extension technology) based UI for Administration & Oracle MAF (mobile application framework) for mobile UI.
- **Server:** No change in technology. Some changes to support modified/new functionalities.
- **Database:** Minimal schema change.
- **Integration:** Integrates with RICS (Retail Integration Cloud Service).
- **Security model:** "hybrid" model
 - AuthN: using IDCS or OCI IAM/WTSS
 - AuthZ: within EICS administration UI
- **Batch scheduling:** Internal to EICS. It has a batch scheduler interface.
- **Printing:** Reports would be downloaded to UI. Users can then print from UI.
- **Deployment:** Standardized cloud deployment model.

Noteworthy Differences between SIOCS V19.x (GBUCS cloud) and SIOCS V22.x (Gen2SaaS)

- **Deployment:** SIOCS 22.x supports two (2) deployments.
- **A>** shared pluggable database (PDB) with Merchandising Foundation Cloud Service (MFCS)
 - different schema
- **B>** standalone
 - allows field enabled integration to on-premises RMS

Table 1–1 Noteworthy Differences

	V19 / GBUCS	V22.x (shared PDB)	V22.x (standalone)
Foundation data seeding	BDI (bulk data integration)	Direct pull from MFCS	File Transfer Service
Changes to foundation data	RICS/RIB	RICS/RIB	RICS/RIB
Pricing - initial import	BDI (bulk data integration)	Direct pull from MFCS	File Transfer Service
Pricing changes	RICS/RIB	Direct pull from MFCS	File Transfer Service
Inventory Transactions	RICS/RIB	RICS/RIB	RICS/RIB
3rd party file uploads	BDI (bulk data integration)	File Transfer Service	File Transfer Service
Report Printing	Service specific OBIEE / BIPublisher instance	DIS - common service for all Retail GBU	DIS - common service for all Retail GBU

Oracle Retail Integration Components

EICS requires other systems, such as a merchandising system, to provide foundation (item, location, and so on) and transaction data (purchase order, stock order) to operate. This would be integrated through RICS (Retail Integration Cloud Service).

EICS integrates out of the box with Oracle Retail Merchandising Foundation Cloud Service (RMFCS).

All other web services-based integration (such as with Point of Sale and Oracle Retail Order Broker systems) exist as well.

The following Integration Infrastructures are required for EICS to integrate with external systems:

- RICS (Retail Integration Cloud Service)

For more details, see the information on integration in the *Oracle Retail Enterprise Inventory Cloud Service Administration Guide*.

Implementation Considerations

In general, a technical implementation involves the following key steps areas:

- [Setup Users](#)
- [Signing into EICS](#)
- [System Configurations](#)
- [Batch Job Admin](#)
- [Initial Data Seeding](#)
- [Report Configurations](#)
- [Store Configurations](#)
- [Internationalization and Localization](#)
- [Integrations](#)
- [Mobile Application \(SOCS\)](#)

URL Reference

The EICS URLs required for reporting, apex data viewer, EICS to RICS Message Publishing and Web service APIs will need to be formed using the format provided in the *Oracle Retail Enterprise Inventory Cloud Service Administration Guide*.

Setup Users

By default, EICS provision one system operator user account and one customer delegate administrator user account. The customer delegate cloud administrator may create additional application admin accounts and implementation user account. Customer cloud administrator may also create a customer security admin user to manage users.

Terminology

This section defines Security Terms used throughout this document.

Table 2-1 Security Terms

Term	Definition
Application Administrator	A customer application admin user who can perform application configurations via EICS admin screen.
Application Implementer	System implementer is user who implements the application.
Application Role	An application role is a collection of users and other application roles. Application roles are defined in applications, and they are not necessarily known to a Java Container.
Application System Operator	Application system operator user can perform application setup and configurations, including operations which are restricted to other application users.
Customer Cloud Administrator	A delegated customer cloud user for customer cloud management tasks, for example create customer security admin user, and other users.
Customer Security Admin	A customer security admin user who can create customer users and assign application roles.
Enterprise Group	An enterprise group is a collection of users and groups. Enterprise groups are defined in security store and are known to java EE server container.
Store Manager	A user who performs store manager role.
Store User	A user who performs store operations with assigned role permissions.
User	A user is an end-user accessing a service or application.

User Types and Responsibilities

Users in SIOCS are divided into the following types based on their job duties.

Table 2–2 User Types and Responsibilities

User Type	Responsibilities
Application Implementer	Data Seeding Configuration Operation Issues
Customer Cloud Administrator Security Admin	Create Additional App Users
Application Administrator	Configure System Configure Store
Store Manager	Store Management
Store User	Store Operations
Retail Home User	A user who can access EICS tile reports on Retail Home and navigate to related operational views in EICS from there.

In addition to application users, integration users need to be setup based on integrated applications.

User Access Control

Users of SIOCS have roles through which they gain access to functions and data.

Security implementation involves the management of:

- Assign security groups to corporate operational users
- Assign application roles to store users

Assign Customer-Cloud-Admin User and Security-Admin User

This is for Retailer's admin to setup other users. This user has application Administrator role assigned. This user can be created and managed by customer in IDCS or OCI IAM.

The Cloud service administrator may setup additional users based on their job duties.

IDCS or OCI IAM Application Roles assigned to Application Admin User:

- admin_users
- security_users
- mps_users
- batch_users
- global_store_users
- full_permission_users

Users also need to be assigned application roles via SIOCS Security Admin Role permission console. For details on how to use the SIOCS administration screens, see the *Oracle Retail Enterprise Inventory Cloud Service Security Guide* and the *Oracle Retail Enterprise Inventory Cloud Service User Guide Security* chapter.

Assign Implementation Users

Implementation users perform the key setup tasks to start your implementation. As part of initial setup, add an implementation user, and give them login credentials and the url for your Oracle Applications. The Cloud service administrator may setup additional users for performing implementation tasks. To create implementation users and the data roles for performing the tasks, the service administrator performs following tasks:

- Create Implementation users and assign appropriate security IDCS or OCI IAM Application Roles in IDCS or OCI IAM
- Assign SIOCS Application Roles in SIOCS Security Admin Console to implementation users, optionally you can create custom roles and data roles to assign to implementation users

Users also need to be assigned application roles via SIOCS Security Admin Role permission console. For details on how to use the SIOCS administration screens, see the *Oracle Retail Enterprise Inventory Cloud Service Security Guide* and the *Oracle Retail Enterprise Inventory Cloud Service User Guide Security* chapter.

Assign Store Users

The Customer security admin user will need to setup the additional application users and store users using IDCS or OCI IAM and assign EICS application permissions and stores to store users via SIOCS Security Users Screens.

Store assignments control the stores available for a user to login to. Users can be assigned access to specific stores through the SIOCS security admin UI.

Steps to setup users and permissions:

- Custom Security Admin creates application users in Oracle Identity Cloud Service (IDCS) or Oracle Cloud Infrastructure Identity and Access Management (OCI IAM)
- Assign IDCS or OCI IAM Application Roles which are applicable to application users based on their job duties
- Define Custom Roles for non-Administrator role. You may assign the Default ADMINISTRATOR role to admin user.
- Assign permissions to Role:

EICS defines two default application roles (ADMINISTRATOR and MANAGER), you may define custom roles to control user accesses based on job duties. There are 350+ roles permissions that decide how users access functionality. For details, see the *Oracle Retail Enterprise Inventory Cloud Service Administration Guide - Configuration* chapter.

- Assign user to roles and stores:

Once stores are seeded into EICS, in SIOCS Security screen, customer security admin can assign users to stores, application roles. You may assign a single user to stores or use SIOCS UI Spreadsheet Data Loader to upload user role assignments.

See *Oracle Retail Enterprise Inventory Cloud Service Security Guide - Application Security* chapter, Mass Assigning Roles and Stores section and [SIOCS UI Spreadsheet Data Loader](#).

Signing into EICS

When you launch the EICS URL, you are re-directed to login Screen.

Login Screen

Use the EICS login screen to sign in the EICS application.

Oracle Identify Cloud Service (IDCS) or Oracle Cloud Infrastructure Identity and Access Management (OCI IAM) requires you to provide a valid user ID and password set up in IDCS or OCI IAM and select **Sign In**. The user must also be assigned proper roles and permissions within EICS.

Successful Login

If the User ID and password are valid, IDCS or OCI IAM authenticate the user, and if the user is configured in EICS, the system logs the user in.

Un-Successful Login

Please see [Troubleshooting Tips](#).

System Configurations

There is 200+ system configuration settings applicable across the product functionalities. Depending on which functionality would be used, please read and configure settings accordingly.

Users with ADMINSTROR application role and admin_users IDCS or OCI IAM Application Role have permissions to update configurations. Some of restricted configuration settings requires users to have sysop_users IDCS or OCI IAM Application Role.

For more information on configuration please see *Oracle Retail Enterprise Inventory Cloud Service Administration Guide* - Configuration chapter.

Summary of Admin System Configurations Topics

The property settings that displayed on the Configure System Screen are listed below in groups:

- [Admin Configurations](#)
- [Audit Configurations](#)
- [Batch Configurations](#)
- [Functional Areas Related Configurations](#)
- [Message Processing Configurations](#)
- [Mobile Configurations](#)
- [Notification Configurations](#)
- [Purge Configurations](#)
- [System and Integration Web Service Configurations](#)
- [Time Zone Configurations](#)
- [UI Configurations](#)

Admin Configurations

Table 4–1 Admin Configurations

Configuration Topic	Descriptions
Admin	Configurations under this topic contains general application admin settings. See <i>Oracle Retail Enterprise Inventory Cloud Service Administration Guide - Configuration</i> chapter for details.

Audit Configurations

Table 4–2 Audit Configurations

Configuration Topic	Descriptions
Audit	Configurations under this topic contains auditing settings. See <i>Oracle Retail Enterprise Inventory Cloud Service Administration Guide - Configuration</i> chapter for details.

Batch Configurations

Table 4–3 Batch Configurations

Configuration Topic	Descriptions
Batch	Configurations under this topic contains settings for batch settings, such as file import path, object-storage/FTS (file transfer service) locations, and so on.

Batch File Configurations

At the time of provisioning, the Oracle Cloud team configures an object-storage/FTS (file transfer service) to facilitate the import and export of the batch files in and out of the cloud service. The batch file paths are set during EICS application installation. If the paths changed after installation, system operator may update the path using EICS system configuration screen.

Functional Areas Related Configurations

Table 4–4 Functional Area Specific Configurations

Configuration Topic	Descriptions
Carton Lookup	Configurations under this topic contains settings for Container Lookups.
Customer Order	Configurations under this topic contains settings for Customer Order Fulfilment.
DSD Receiving	Configurations under this topic contains settings for Direct Store Receiving.
Inventory Adjustment	Configurations under this topic contains settings for Inventory Adjustment.
Item Basket	Configurations under this topic contains settings for Item Basket.
Item Lookup	Configurations under this topic contains settings for Item Lookup.

Table 4–4 (Cont.) Functional Area Specific Configurations

Configuration Topic	Descriptions
Item Price	Configurations under this topic contains settings for Item Price.
Ops	Configurations under this topic contains settings related to specific functional area operations.
RTV	Configurations under this topic contains settings for Return to Vendor.
RTV Shipment	Configurations under this topic contains settings for Return to Vendor Shipment.
Shelf Replenishment	Configurations under this topic contains settings for Shelf Replenishment.
Stock Counts	Configurations under this topic contains settings for Stock count.
Transfer Receiving	Configurations under this topic contains settings for transfer receiving.
Transfer Shipment	Configurations under this topic contains settings for transfer shipment.
transfers	Configurations under this topic contains settings for transfers.
UIN	Configurations under this topic contains settings for item Unique Identification Number processing configurations.

Message Processing Configurations

Table 4–5 MPS Configurations

Configuration Topic	Descriptions
MPS	Configurations under this topic contains settings for MPS (Message Processing). See <i>Oracle Retail Enterprise Inventory Cloud Service Administration Guide - Configuration</i> chapter for details.

Mobile Configurations

Table 4–6 Mobile Configurations

Configuration Topic	Descriptions
Mobile	Configurations under this topic contains settings for Mobile Client. See <i>Oracle Retail Enterprise Inventory Cloud Service Administration Guide - Configuration</i> chapter for details.

Notification Configurations

Table 4–7 Notification Configurations

Configuration Topic	Descriptions
Notification	Configurations under this topic contains settings for notification settings. See <i>Oracle Retail Enterprise Inventory Cloud Service Administration Guide - Configuration</i> chapter for details.

Purge Configurations

Table 4–8 Purge Configurations

Configuration Topic	Descriptions
Purge	Configurations under this topic contains settings for data purge, such as days to hold, and so on. See <i>Oracle Retail Enterprise Inventory Cloud Service Administration Guide - Configuration</i> chapter for details.

System and Integration Web Service Configurations

Table 4–9 System and Integration Web Service Configurations

Configuration Topic	Descriptions
System Setting	Configurations under this topic contains settings for generic system configurations, and so on, external web service URLs, and system setting refresh rates, and so on. See <i>Oracle Retail Enterprise Inventory Cloud Service Administration Guide - Configuration</i> chapter for details.

Time Zone Configurations

Table 4–10 Time Zone Configurations

Configuration Topic	Descriptions
TIME_ZONE	Configurations under this topic contains settings to determine if GMT time zone settings are used. See <i>Oracle Retail Enterprise Inventory Cloud Service Administration Guide - Configuration</i> chapter for details.

UI Configurations

Table 4–11 UI Configurations

Configuration Topic	Descriptions
UI	Configurations under this topic contains UI related settings, such as UI search limits, and so on. See <i>Oracle Retail Enterprise Inventory Cloud Service Administration Guide - Configuration</i> chapter for details.

Batch Job Admin

Batch Scheduler

EICS provides a batch scheduler interface that allows customers to enable/disable batch jobs and schedule batches with specific intervals.

Please note this is part of EICS itself.

For more details, see the information on batches in the *Oracle Retail Enterprise Inventory Cloud Service Administration Guide* Batches Chapter- Job Scheduler.

Batch Activity

Admin users and system operator can view batch job activities via EICS Batch Job Admin Screen.

See *Oracle Retail Enterprise Inventory Cloud Service Administration Guide* Batch Job Admin Chapter- Job Admin screen.

Cleanup Batches

The scheduled batch jobs that perform cleanup of old data have been moved to systems operations. The scheduling and execution of these batch jobs is necessary for the functioning of the application. Each of these jobs will be scheduled to run by default on a cycle, often daily. As systems operations, these will not appear on the batch screen unless the user is an Oracle system operations account.

However, most of these cleanup batch jobs have a retention policy that is configurable in the systems configuration. The system configuration is available to standard customer accounts where they can set those configurations within specified range.

Cleanup Batch List

- Activity Locks
- Adhoc Stock Count
- Batch Directories
- Batch Log
- Closed Transfers
- Completed UINs

- Customer Orders
- DSD and Purchase Orders
- Invalid Users
- Invalid User Roles
- Inventory Adjustments
- Item
- Item Baskets
- Item Hierarchy
- Item Price
- Notifications
- Price Change Worksheet
- Price History
- Related Items
- Resolved UIN Problems
- RFID
- Sales Posting
- Shelf Adjustments
- Staged Messages
- Stock Counts
- Store Orders
- Temporary UINs
- Vendor Returns

Initial Data Seeding

Initial Data Seeding

Data seeding is a process where EICS seed enterprise foundation information from external system, such as merchandise hierarchy, items, locations, items, suppliers, and related data.

See *Oracle Retail Enterprise Inventory Cloud Service Administration Guide - Data Seeding* chapter.

SIOCS UI Spreadsheet Data Loader

Use EICS Spreadsheet Data Loader to upload data to the EICS application tables from spreadsheets. Spreadsheet Data Loader is applicable to small or medium data file up to a few Megabytes.

EICS UI spreadsheets loader provides following features:

- Download the templates
- Upload user store assignments
- Upload user role assignments
- Data Validations

Upload Store Assignments

You can assign users to stores using EICS Spreadsheet data loader in EICS Admin Security screen. User must exist in credential store (for example, Oracle IDCS).

You must have the Application Administrator job role or privileges.

Spreadsheet Templates

UserAssignmentsTemplate.xlsx/Store Assignments:

Table 7–1 Spreadsheet Templates

Field	Description	Required
Action	The assignment action, choose value from dropdown, assign, revoke.	Yes
Action Value	N/A	No
Username	The username to assign the store.	Yes
Store ID	The store Id to assign to user.	Yes

See *Oracle Retail Enterprise Inventory Cloud Service Security Guide* and *Oracle Retail Enterprise Inventory Cloud Service User Guide Security* chapter.

Upload Role Assignments

You can assign users to roles using EICS Spreadsheet data loader in EICS Admin Security screen. User must exist in credential store (for example, Oracle IDCS or OCI IAM).

The role must exist in EICS.

You must have the Application Administrator job role or privileges.

Spreadsheet Templates

UserAssignmentsTemplate.xlsx/Role Assignments:

Table 7-2 Spreadsheet Templates

Field	Description	Required
Action	The assignment action, choose value from dropdown, assign, revoke.	Yes
Action Value	N/A	No
Username	The username to assign the store.	Yes
Role Name	The role name to assign to user.	Yes
Store ID	The store Id to assign to user.	No
Start Date	User start date.	No
End Date	User end date.	No

See *Oracle Retail Enterprise Inventory Cloud Service Security Guide* and *Oracle Retail Enterprise Inventory Cloud Service User Guide Security* chapter.

Report Configurations

EICS ships with around 30+ built-in operational reports. These reports are requested from the EICS user interface. The reports are displayed in PDF on the EICS user interface. These reports cannot be modified.

See *Oracle Retail Enterprise Inventory Cloud Service Administration Guide Reporting* chapter and *Oracle Retail Enterprise Inventory Cloud Service Administration Guide Appendix D: Report Formats*.

Store Configurations

Once stores are seeded into EICS, you can change default store configurations.

There is 100+ configuration settings applicable specific for a store(s).

Users with ADMINSTROR application role and admin_users IDCS or OCI IAM Application Role have permissions to change store configurations.

Store Admin UI also provides mass store configuration updates features to update configurations for all stores or list of stores.

For details, see the *Oracle Retail Enterprise Inventory Cloud Service Administration Guide* Configuration chapter.

Mobile Application (SOCS)

SOCS is a hybrid mobile platform that gets distributed through a mobile application archive (.maa) file from the Oracle Software Delivery Cloud (OSDC). Go to <https://edelivery.oracle.com> and search for **Store Operations Cloud Service** to get the mobile archive file. This .maa needs to be built into either an Android build (apk) or an iOS build (ipa).

SOCS can also be downloaded as an application from Google Play Store.

For details, see the *Oracle Retail Store Operations Cloud Service Mobile Guide*.

Configure Manual Quantity Entry Mode

For MAF client, you need to set the numeric entry popup on MAF will have its mode defaulted to either scan mode or override mode.

For details, see the *Oracle Retail Enterprise Inventory Cloud Service Administration Guide* Configuration chapter.

Enable Mobile Functionalities

By default, the EICS application installer set following value as false.

```
input.sim.mobile.client.enabled = false
```

By disabling **Access Execution UI**, Mobile Client (SOCS) access on following functional areas is disabled. If a customer has purchased SOCS licenses, then following access permissions need to be enabled in order to use these functionalities on mobile client.

- Access Execution UI
- Access Inventory Adjustments
- Access DSD Receiving
- Access RTV
- Access RTV Shipment
- Access Transfer
- Access Transfer Shipment
- Access Transfer Receiving
- Access Customer Order
- Access Stock Count

- Access Shelf Replenishment
- Access Open Transactions
- Access Notifications
- Access Item Basket

Internationalization and Localization

SIOCS supports translation into following locales out of the box:

1. Arabic
2. Chinese (Simplified)
3. Chinese (Traditional)
4. Croatian
5. Dutch
6. English
7. French
8. German
9. Greek
10. Hungarian
11. Italian
12. Japanese
13. Korean
14. Polish
15. Portuguese (Brazilian)
16. Russian
17. Spanish
18. Swedish
19. Turkish

Extension hooks for adding new locales

Translation records for these new locales have been defaulted to English.

Translation value can be updated for these locales by accessing administration screen on EICS Admin UI.

1. Albanian
2. Armenian
3. Azerbaijani
4. Belarusian

-
5. Bengali
 6. Bosnian
 7. Bulgarian
 8. Burmese
 9. Czech
 10. Danish
 11. Estonian
 12. Filipino
 13. Finnish
 14. Georgian
 15. Hebrew
 16. Hindi
 17. Indonesian
 18. Kazakh
 19. Khmer
 20. Lao
 21. Latvian
 22. Lithuanian
 23. Malay
 24. Norwegian
 25. Romanian
 26. Serbian
 27. Slovak
 28. Slovene
 29. Thai
 30. Ukrainian
 31. Urdu
 32. Uzbek
 33. Vietnamese

EICS Admin UI translations relies on following two bundle categories:

1. Framework bundles: owned by Oracle JET and Oracle Retail platform team.
2. EICS bundles: owned by EICS.

These bundles are merged at runtime to provide an overall translation bundle which is used to provide translated UI content.

For updating Oracle provided translations Administration UI provides a setup screen.

For more details, see the information in the *Oracle Retail Enterprise Inventory Cloud Service Administration Guide* Internationalization chapter.

SOCS (built using Oracle MAF) follows an XML format to organize translation records within a translation bundle. Each supported locale will have its own XLF file. For example, translations for French locale could be found under **xxxMobileViewControllerBundle_fr.xlf** file. For information on how to update the mobile translations, see the *Oracle Retail Store Operations Cloud Service Mobile Guide*.

Operational Monitoring

To assist system operators and implementers to view operational issue, following tools can assist users with job monitoring activities.

View Operational Issues through EICS Admin UI

To view EICS application operational issues, EICS provides an Operational Issues Admin UI. For details, see *Oracle® Retail Enterprise Inventory Cloud Service Administration Guide*.

EICS DB Data Viewer User

In addition to data sources users, EICS database installation also creates a DB data viewer user.

This user has read permissions to all tables/synonyms owned by EICS master schema. This DB data viewer user can be used by system implementer or system operator to perform necessary job monitoring activities. This user has the following database roles assigned to it:

- sim_business_viewer
- sim_admin_viewer
- sim_mps_viewer
- sim_security_viewer
- sim_rib_viewer

This chapter describes the integration setup within EICS to Integrate with other systems.

For completed integration interfaces, see *Oracle Retail Enterprise Inventory Cloud Service Administration Guide* - Integration chapter.

- [Pricing Integration with Retail Pricing Cloud Service](#)
- [Stock Count Export Integration with MFCS](#)
- [Sale Data Integration with POS and ReSA](#)
- [Web Service: Integration with Manifest System](#)
- [Web Service: Integration with External System for Ticket Printing](#)
- [RIB Integration Guidance \(From SIOCS Perspective\)](#)
- [Other Integration Interfaces](#)
- [Standalone Deployment - Integration with on-premise RMS/RIB](#)

Pricing Integration with Retail Pricing Cloud Service

Clearance Transaction Import

See *Oracle® Retail Enterprise Inventory Cloud Service Administration Guide* Batch Chapter: Clearance Transaction Import

Price Change Transaction Import

See *Oracle® Retail Enterprise Inventory Cloud Service Administration Guide* Batch Chapter: Price Change Transaction Import

Promotion Offer Import (N/A): Requires Field Enabled Integration

SIOCS does not use Oracle Retail Pricing Cloud Service Interface PromotionOffer_Tx. It requires field enabled integration. At this point, the pricing service does not post promotion price by item/date, so there is nothing for SIOCS to use. SIOCS does have a generic promotion interface for the retailer to integrate promotion price into.

Stock Count Export Integration with MFCS

Stock Count Export

When a Unit Amount stock count is authorized, a Unit and Amount Stock Counts Export file is generated.

See *Oracle® Retail Enterprise Inventory Cloud Service Administration Guide Appendix: Unit and Amount Stock Counts Export*.

Sale Data Integration with POS and ReSA

Retail Sale Audit Import Batch

See:

- *Oracle® Retail Enterprise Inventory Cloud Service Administration Guide* Batch chapter
- *Oracle® Retail Enterprise Inventory Cloud Service Administration Guide* Integration chapter

Web Service: Integration with Manifest System

See:

- *Oracle® Retail Enterprise Inventory Cloud Service Administration Guide - Integrate with Manifest System*
- Web Service URL:

System Integrator provides the external Web Service URL. This URL is taken as input by the EICS installer to update system configuration entry in the database.

The URL can also be updated via EICS System Configuration UI using the below configuration.

SIOCS is not a package shipping management system. It calls an external shipping-manifest system that acts as a broker for multiple courier entities such as FedEx, UPS, DHL, national mail carriers and so on.

Details of the shipping manifest web service are captured in the WSDL. Details of the data elements are provided in the XSD.

- Download Shipping-Manifest-Service jar from My Oracle Support <Patch XXXXXX> after contacting Oracle Support.
- Please look at all the definitions/wsdl in that JAR and write service as needed. This service will run on a server outside of Oracle network.
- Please log a service request to allow-list this server URL.
- Please use the Credentials Administration UI under Technical maintenance to update credential details. For details, please see *Oracle® Retail Enterprise Inventory Cloud Service Administration Guide - Chapter 6*.
- Web Service User alias: manifest-user
- Web Service: Integration with External System for Ticket Printing

Web Service: Integration with External System for Ticket Printing

See:

- *Oracle® Retail Enterprise Inventory Cloud Service Administration Guide - Ticket Print*
- Web Service URL:

System Integrator provides the external Web Service URL. This URL is taken as input by the EICS installer to update system configuration entry in the database.

SIOCS is not a printing system that manages printers & formats. Tickets are sent to an external web service endpoint; that is implemented by any system that needs to receive tickets. The external system is responsible for managing printing.

SIOCS stages the printed tickets in the Message Processing System queue. In order to process the staged tickets, the **TicketPrint** outbound MPS work type needs to be enabled through the MPS Work Type screen. Please refer to the *Oracle Retail Enterprise Inventory Cloud Service Administration Guide* for details on MPS Work Type screen.

The external web service is called **tps-TicketPrint** and has one operation **printTickets**.

Details of the ticket printing web service are captured in the WSDL. Details of the ticket data elements are provided in the XSD.

- Download tps- TicketPrintService jar from My Oracle Support <Patch XXXXXX> after contacting Oracle Support.
- Please look at all the definitions/wSDL in that JAR and write service as needed. This service will run on a server outside of Oracle network.
- Please make sure outbound TicketPrint MPS work type has been enabled.
- Please log a service request to allow-list this server URL.
- Please use the Credentials Administration UI under Technical maintenance to update credential details. For details, please see *Oracle® Retail Enterprise Inventory Cloud Service Administration Guide - Chapter 6*.
- Web Service User alias: ticket-user


ZPL

- ZPL is a proprietary ticket formatting language used for printing to Zebra printers.
- ZPL is not entirely an ASCII format and is not readable without tools.
- If not using ZPL ticket printing on Zebra printers, then usage of ZPL is not recommended.
- If using ZPL with ZPL printers, SIOCS allows for the placement of tags within the ZPL design (managed by ZPL tools).
- SIOCS will then replace those tags with the correct data before sending the ticket information to the web service endpoint.
- ZPL files and formats are created and managed by tools and software outside of SIOCS. Files are uploaded into SIOCS.

Non-ZPL Printing

- Information captured in printer administration is sent with the ticket information, such as printer name and address.
- The custom development of the printing system (or middleware system designed to speak to a printing solution) must use the printer and ticket information to determine how to print.
- Ticket information can be used to determine format of ticket to print, but such tasks as matching the ticket type information to a template managed by the implementing system.
- Once a template in the middleware system is identified, the middleware system should use ticket information to populate the template and print the ticket. SIOCS does not manage printing templates.
- Printer information can be used to determine which printer it should be sent to.
- Printing templates are created and managed by tools and software outside of SIOCS as part of a custom or middleware product.

Figure 13–1 Ticket Printing

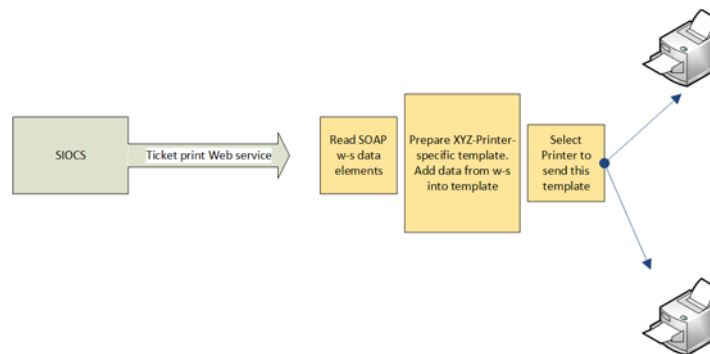

RIB Integration Guidance (From SIOCS Perspective)

Overview

The Oracle Retail Integration Bus (RIB) is a fully distributed integration infrastructure that implements messaging using Asynchronous JMS Publish/Subscribe Fire-and-Forget model.

The concept of message-bus is that one product broadcasts information and each product or cloud service only subscribes to those message families/payloads that they are interested in. Everything else is ignored.

To process all messages intended for ordering systems, pricing systems, or any other external systems would require massive processing of mapping, then writing to the database, and then reading messages that are not intended for processing in our system in order to discard them.

To avoid all the processing and overhead, messages not intended for SIOCS are simply dropped at the point of receiving them from the RIB.

Unsupported Messages and Payloads

When an entire family or message type is not used or desired in SIOCS, then it is not subscribing to and does not arrive at SIOCS.

The message type and payload have no injector that places the RIB payload into the MPS staged message processing workflow in SIOCS.

Unsupported Data within Messages and Payloads

In the case of some message families or types, a brief look at the internal information of the message may also determine, it is not meant for SIOCS.

1. SIOCS does not process non-stockholding stores (stores with no inventory). So, if a payload arrives for a message family and type we support, but the payload contains an internal attribute, usually labeled "stockholding_ind" that is set to "N", the payload is dropped as it is not intended for the SIOCS system.
2. SIOCS does not process virtual stores so limited itself by store type. If the payload contains a store type attribute, then SIOCS only processes COMPANY ("C") stores and FRANCHISE ("F") stores.
3. When dealing with quantities, a quantity of 0 primarily means a cancellation or removal of that item or detail from a transaction, and so it is deleted. There may be exception to this in certain circumstances.

Errors

Errors that occur within the RIB through injection in MPS are logged and managed within the RIB.

Errors that occur within MPS staged messages within SIOCS are logged and can be seen and managed with MPS management workflow.

Messages that are successfully processed, including successfully being ignored as not relevant to the store, do not log any information.

Modify/Delete

In the case of transaction data, in some cases if the transaction is actively being processed by a user or business functionality in the store, it may have already passed a state where it can be modified or canceled.

Message Family/Type

The following table contains a list of message families and types that SIOCS subscribes to (incoming) or broadcasts (publishes out) to other systems.

It indicates the family name, message type, payloads used within the family, whether SIOCS publishes or subscribes to it, and whether or not it is part of the initial data seeding.

Message type suffixes indicates intent of the payload: **Cre** means create information, **Mod** means modify information, and **Del** means cancel or delete information.

Table 13–1 Message Family/Type

Message Family	Message Type	Payload	Publish/Subscribe	Seeded	SIOCS Data
ASNIn	ASNInCre	ASNInDesc	Subscribe	No	Store Delivery
	ASNInMod				
ASNOut	ASNOutCre	ASNOutDesc	Publish	No	Store Shipment
ClrPrcChg	ClrPrcChgCre	ClrPrcChgDesc	Subscribe	No	Clearance Price Change
	ClrPrcChgMod	ClrPrcChgRef			
	ClrPrcChgDel	ClrPrcChgDtlRef			
CoInvAvail	COInvAvailMod	COInvAvailDesc	Publish	No	Customer Order Store Inventory Shift Notification
Diffs	DiffCre	DiffDesc	Subscribe	Yes	Differentiators
	DiffDel	DiffRef			
	DiffMod				
DSDReceipt	DSDReceiptCre	DSDReceiptDesc	Publish	No	Non-PO DSD Receipt
	DSDReceiptMod				
FulfilOrd	FulfilOrdStDlvCre	FulfilOrdDesc	Subscribe	No	Fulfillment Orders
	FulfilOrdReqDel				
	FulfilOrdApprDel				
FulfilOrdCfm	FulfilOrdCfmCre	FulfilOrdCfmDesc	Publish	No	Fulfillment Order Confirm
FulfilOrdCfmCnc	FulfilOrdCfmCncCre	FulfilOrdRef	Publish	No	Fulfillment Order Cancel
InvAdjust	InvAdjustCre	InvAdjustDesc	Publish, Subscribe	No	Stock Movement Notification
InvReq	InvReqCre	InvReqDesc	Publish	No	Store Order/Item Request
ItemLoc	ItemLocCre	ItemLocDesc	Subscribe	Yes	Item Location Item Replenishment
	ItemLocDel				
	ItemLocMod				
	ItemLocReplMod				

Table 13–1 (Cont.) Message Family/Type

Message Family	Message Type	Payload	Publish/Subscribe	Seeded	SIOCS Data
Items	ItemBOMCre	ItemBOMDesc	Subscribe	Yes	Item
	ItemBOMDel	ItemDesc			Item Details
	ItemBOMMod	ItemHdrDesc			Item UPC
	ItemCre	ISCDimDesc			Item Image
	ItemDel	ItemImageDesc			
	ItemHdrMod	ItemTcktDesc			
	ItemImageCre	ItemUPCDesc			
	ItemImageMod				
	ItemImageDel				
	ItemUPCCre				
	ItemUPCDel				
	ItemUPCMod				
	Items	RelItemHeadCre			RelatedItemDesc
RelItemHeadMod					
RelItemHeadDel					
RelItemDetCre					
RelItemDetDel					
RelItemDetMod					
Items	ItemSupCre	ItemSupCtyDesc	Subscribe	Yes	Supplier Items
	ItemSupDel	ItemSupCtyMfrDesc			Supplier Manufacturer
	ItemSupMod	ItemSupDesc			Supplier Country
	ItemSupCtyCre				
	ItemSupCtyDel				
	ItemSupCtyMod				
	ISCDimCre				
	ISCDimMod				
	ISCDimDel				
	ISCMfrCre				
	ISCMfrDel				
	ISCMfrMod				
	Items	ItemUDALOVCre			ItemUDADateDesc
ItemUDALOVMod		ItemUDAFFDesc			
ItemUDALOVDel		ItemUDALOVDesc			
ItemUDAFFCre					
ItemUDAFFMod					
ItemUDAFFDel					
ItemUDADateCre					
ItemUDADateMod					
ItemUDADateDel					

Table 13–1 (Cont.) Message Family/Type

Message Family	Message Type	Payload	Publish/Subscribe	Seeded	SIOCS Data
MerchHier	ClassCre	MrchHrClsDesc	Subscribe	Yes	Department
	ClassMod	MrchHrDeptDesc			Class
	ClassDel	MrchHrScIsDesc			Subclass
	DeptCre				
	DeptMod				
	DeptDel				
	SubclassCre				
	SubclassMod				
	SubclassDel				
Order	POCre	PODesc	Subscribe	No	Purchase Order
	PODel	PORef			
	PODtICre				
	PODtIDel				
	PODtIMod				
	POHdrMod				
Partner	PartnerCre	PartnerDesc	Subscribe	Yes	Finishers
	PartnerDel	PartnerOUDesc			
	PartnerMod	PartnerRef			
	PartnerDtICre				
	PartnerDtIDel				
	PartnerDtIMod				
PrmPrcChg	MultiBuyPromoCre	PromotionDesc	Subscribe	No	Promotions
	MultiBuyPromoMod				
	MultiBuyPromoDel				
	PrmCnlItemLocCre				
RcvUnitAdj	RcvUnitAdjCre	RcvUnitAdjDesc	Subscribe	No	Adjusts Supplier Deliveries
	RcvUnitAdjMod				
Receiving	ReceiptCre	ReceiptDesc	Publish	No	Transfer Receipt, Purchase Order Receipt, Receipt with Customer Order
	ReceiptOrdCre				
RegPrcChg	RegPrcChgCre	RegPrcChgDesc	Subscribe	No	Regular Price Change
	RegPrcChgMod	RegPrcChgDtl			
	RegPrcChgDel				
RTV	RTVCre	RTVDesc	Publish, Subscribe	No	Warehouse Return

Table 13–1 (Cont.) Message Family/Type

Message Family	Message Type	Payload	Publish/Subscribe	Seeded	SIOCS Data
RTVReq	RTVReqCre	RTVReqDesc	Subscribe	No	Supplier Return
	RTVReqMod	RTVReqRef			
	RTVReqDel				
	RTVReqDtlCre				
	RTVReqDtlDel				
	RTVReqDtlMod				
SeedData	DiffTypeCre	DiffTypeDesc	Subscribe	Yes	Differentiator Types
	DiffTypeDel	DiffTypeRef			
	DiffTypeMod				
ShipInfo	ShipInfoCre	ShipInfoDesc	Publish	No	Pre-Shipment Notification
SOStatus	SOStatusCre	SOStatusDesc	Publish, Subscribe	No	Transfers Shipments
StkCountSch	StkCountSchCre	StkCountSchDesc	Publish	No	Stock Count Schedule
	StkCountSchMod				
	StkCountSchDel				
	StkCountSchDtlDel				
StockOrder	SOCre	SODesc	Subscribe	No	Transfer Allocation
	SODtlCre	SORef			
	SODtlDel				
	SODtlMod				
	SOHdrDel				
	SOHdrMod				
Stores	StoreCre	StoreDesc	Subscribe	Yes	Store
	StoreDel	StoreRef			
	StoreMod				
	StoreDtlCre				
	StoreDtlDel				
	StoreDtlMod				
UDAs	UDAHdrCre	UDADesc	Subscribe	No	User Defined Attributes
	UDAHdrMod	UDARef			
	UDAHdrDel	UDAValDesc			
	UDAValCre	UDAValRef			
	UDAValMod				
	UDAValDel				

Table 13–1 (Cont.) Message Family/Type

Message Family	Message Type	Payload	Publish/Subscribe	Seeded	SIOCS Data
Vendor	VendorAddrCre	VendorAddrDesc	Subscribe	Yes	Suppliers
	VendorAddrDel	VendorAddrRef			
	VendorAddrMod	VendorDesc			
	VendorCre	VendorRef			
	VendorDel				
	VendorHdrMod				
	VendorOUCre				
	VendorOUDel				
WH	WHCre	WHDesc	Subscribe	Yes	Warehouse
	WHDel	WHRef			
	WHMod				

Other Integration Interfaces

See *Oracle® Retail Enterprise Inventory Cloud Service Administration Guide* Integration chapter.

Standalone Deployment - Integration with on-premise RMS/RIB

SIOCS V22 has enabled standalone deployment (that is, not shared pluggable database with MFCS) option. In order to integrate with on-premise Retail merchandising system, field enablement would be needed.

As noted in the [Oracle SIOCS Implementation Overview](#) chapter, File Transfer Service (FTS) would play a key role in enabling this integration.

Depending on the version of Retail Merchandising System (RMS), RIB payloads may differ as well. Implementers will have to do analysis. If your RMS version is V19 or V16 then payloads would be much more compatible in terms of required attributes; than dealing with pre-V16 RMS.

Please note that RIB (retail integration bus) would always deploy where Merchandising gets deployed; hence RIB-on-premise would interact with SIOCS.

At high level, field enablement would be needed for:

- Foundation Data seeding and pricing

For file layout and more detail, please see the Standalone Data Seeding section in the *Oracle Retail Enterprise Inventory Cloud Service Administration Guide*.

- File movement between SIOCS and Merchandising

- ReSA import into SIOCS
- Stk count export from SIOCS to Merchandising

- 3rd party file imports

For more information, please see the FTS Enabled Third Party File Import Batches section within the File Transfer Services chapter in the *Oracle Retail Enterprise Inventory Cloud Service Administration Guide*.

- In order to call RIB instance located on-premises from SIOCS V22, RIB endpoint needs to be allow listed. Create a service request on My Oracle Support to allow list the on-premises server url.
 - Once allow listed, SIOCS to RMS communication via RIB can commence through standard RIB- SOAP services.
 - Similarly on-premise RMS would use RIB-SOAP-injector service to communicate with SIOCS.

Customization and Extension

Customization and Extension Considerations

This section provides considerations for customization and extension.

Code Customization

No customization to the core application code is permitted.

No write access to the database or data model is permitted.

File Transfer Services

Overview

Oracle Cloud Infrastructure Object Storage is an internet-scale, high-performance storage platform that offers reliable and cost-efficient data durability. File Transfer Service (FTS) for the Store Inventory Cloud Services are available as JSON REST services. These APIs allows you to manage uploading and downloading files to Object Storage.

Access to files is through a Pre-Authenticated Request (PAR), which is a URL that requires no further authentication to upload or download to the application's object storage. To retrieve a PAR, you must use the appropriate FTS services.

The FTS APIs enables external application to import files to and export files from Object Storage used by the solutions.

See *Oracle Retail Enterprise Inventory Cloud Service Administration Guide - File Transfer Services* chapter.

This chapter describes the integration setup within EICS to Integrate with other systems.

EICS Log Debug Settings

EICS debug settings apply to EICS-server, JET-Admin-UI and MAF-mobile-UI.

The server would be the main place for debug logging. Accessing logs is only via filesystem at least for EICS logs. WebLogic logs can be viewed in the console, if needed.

If a log level change is needed to troubleshoot a problem, in addition to, changing debug settings, restarting the server is required.

Debug Configuration file: `sim-server-resources.jar -> logback.xml`

Server: For the server debug, it's possible to access through MBeans (JMX), otherwise it requires changing deployed files, which means restarting the server.

JET Admin UI (EICS): Does allow for changing logging through the browser console, but this would be after application startup. So, any logging for the start/login processes would need the configuration on the server to be changed (deployed).

MAF UI (SOCS): would require a new build and tools to access the logs.

Server Log File Locations

Table 16–1 Server Log File Locations

#	Log Type	Log Location
1	EICS application log	Server: <eics weblogic server> Log directory: <eics_domain_home>/log For example: /u01/domains/wls_sim/SIMDomain/log sim.log, sim.1.log, ..., sim.log.log sim_services.log (For clustered environment, need to check all nodes log locations)

Table 16–1 (Cont.) Server Log File Locations

#	Log Type	Log Location
2	Domain and admin server log	Server: <eics weblogic server> Log directory: <eics_domain_home>/servers/AdminServer/logs SIMDomain.log AdminServer.log access.log
3	Application server log	Server: <eics weblogic server> Log directory: <eics_domain_home>/servers/sim-server_1/logs For example: /u01/domains/wls_ sim/SIMDomain/servers/sim-server_1/logs sim-server_1.log sim-server_1.out access.log

Troubleshooting Tips

[Application Login Troubleshooting](#)

[Report Troubleshooting](#)

[RIB \(Retail Integration Cloud Service / RICS\) Troubleshooting](#)

[Web Service Troubleshooting](#)

[References](#)

Application Login Troubleshooting

Table 17–1 Application Login Troubleshooting

#	Error Category	Solution Hint
1	Customer Admin User login issue	<p>1. Verify user exists in Oracle IDCS or OCI IAM (Notes: a default admin user is also created in EICS database)</p> <p>2. Verify user in IDCS or OCI IAM has assigned the following IDCS or OCI IAM Application Roles:</p> <ul style="list-style-type: none"> admin_users security_users mps_users batch_users global_store_users <p>3. Verify user in SIOCS has assigned ADMINISTRATOR SIOCS Application Role</p>
2	Store user login failure on web client after version upgrade	<p>Clear browser cache.</p> <p>Custom cache headers are used which do not allow the web client application to be cached by the browser.</p> <p>Users are required to clear the existing copy of the client that is already cached on their systems by clearing the browser cache before logging into the web client first time after a version update.</p>
3	Store user login failure	See <i>Oracle® Retail Enterprise Inventory Cloud Service Administration Guide - Security</i> chapter for details.

Report Troubleshooting

Table 17–2 Report Troubleshooting

#	Error Category	Solution Hint
1	EICS report connection issue	Verify Reporting WSDL in EICS System Configuration screen setup.

RIB (Retail Integration Cloud Service / RICS) Troubleshooting

Table 17–3 RIB (RICS) Troubleshooting

#	Error Category	Solution Hint
1	RIB injection user connection issue	Verify user has been assigned the following IDCS or OCI IAM Application Role: integration_users
2	RIB publisher connection issue	Verify the credentials of rib-user alias matches between in both EICS credential store and RIB-SIM. In RIB-SIM server, that the user needs to be in ribAdminGroup.

Web Service Troubleshooting

Table 17–4 Web Service Troubleshooting

#	Error Category	Solution Hint
1	RIB injection user connection issue	1. Verify user has been assigned integration_users IDCS or OCI IAM Application Role 2. Verify web service end point url 3. Verify web service policy

References

1. Oracle® Retail Store Inventory Operations Cloud Services Data Model residing on My Oracle Support
2. Oracle Retail Integration Cloud Service Integration Guide
3. Oracle Retail Enterprise Integration Overview Guide

Appendix: Accessibility

Accessibility involves making your application usable for persons with disabilities such as low vision or blindness, deafness, or other physical limitations. This means, for example, creating applications that can be:

- Used without a mouse (keyboard only).
- Used with assistive technologies such as screen readers and screen magnifiers.
- Used without reliance on sound, color, animation, or timing.

Enterprise Inventory Cloud Service (EICS)

This user interface is designed using Oracle JavaScript Extension Toolkit (JET). Oracle JET components have built-in accessibility support that conforms to the Web Content Accessibility Guidelines version 2.0 at the AA level (WCAG 2.0 AA), developed by the World Wide Web Consortium (W3C). Please note that since different browsers themselves support accessibility somewhat differently, user experience tends to differ on different web-browsers.

Oracle JET components provide support for:

- Keyboard and touch navigation
Oracle JET components follow the Web Accessibility Initiative - Accessible Rich Internet Application (WAI-ARIA) guidelines.
- Zoom
Oracle JET supports browser zooming up to 200%.
- Screen reader
Oracle JET supports screen readers such as JAWS, Apple VoiceOver, and Google Talkbalk by generating content that complies with WAI-ARIA standards, and no special mode is needed.
- Oracle JET component roles and names
Each Oracle JET component has an appropriate role, such as button, link, and so on, and each component supports an associated name (label), if applicable.
- Sufficient color contrast
Oracle JET provides the Alta theme which is designed to provide a luminosity contrast ratio of at least 4.5:1.

Besides use of JET components, the following updates were made to application.

- Added alternative texts to images/logos/icons as needed.
- Added labels as needed to gui widgets.
- Color Contrast was adjusted.
- Improved error identification & display, so screens readers can read meaningful information.

Store Operations Cloud Service (SOCS)

This user interface is designed using Oracle Mobile Application framework (MAF). MAF AMX UI and data visualization components have a built-in accessibility support, with most components being subject to the accessibility audit. Oracle MAF is a hybrid framework which means same codebase gets compiled and rendered on IOS and Android mobile platforms.

MAF accessibility is achieved using WAI-ARIA. Please note that iOS and Android mobile platforms and versions, support WAI-ARIA to varying degrees.

So your MAF Accessibility experience will be greatly influenced by a given platform's support.

Besides use of MAF components, following updates were made to application.

- Added alternative texts to images/logos/icons as needed.
- Added alternative texts for background images.
- Added short-descriptions UI elements on list screens.
- Color Contrast was adjusted.
- Improved error identification & display, so screens readers can read meaningful information.

Appendix: Oracle APEX

This section covers the following topics:

- [What is Oracle APEX?](#)
- [Suggested APEX Usage in Store Inventory Operations Cloud Service](#)
- [APEX Users, Administration](#)
- [Database Objects](#)

What is Oracle APEX?

Oracle Application Express (abbreviated APEX, previously named Oracle HTML DB) is a web-based software development environment that runs on an Oracle database. Application Express is a minimal code web application development tool for the Oracle database which enables end users to design, develop and deploy visually pleasant, responsive, database-driven applications, either on-premises or in the cloud.

Oracle Application Express combines the qualities of a minimal code tool such as productivity, ease of use, and flexibility, with the qualities of an enterprise development tool such as security, integrity, scalability, availability and built for the web.

The following are just a few advantages for the customer using APEX:

- Easy to deploy and configure.
- HTML / Browser based database experience for end user.

Suggested APEX Usage in Store Inventory Operations Cloud Service

Oracle APEX is a bolt-on piece so customers (that is, retailers) can browse the database for transactions.

Oracle APEX components applicable to EICS includes:

- SQL Workshop

This component allows a user to perform SQL operation on the database. Please refer to the [SQL Workshop](#) section for more details.

Note: APEX has other capabilities but those are not applicable for SaaS deployed products such as EICS.


SQL Workshop

The SQL Workshop provides tools that enable users to view database objects. Users can run queries on the database but will be restricted from running DDL and DML scripts on the EICS schema or creating any reference to the tables from EICS schema. This would be controlled via database privileges assigned to an APEX schema user. An APEX schema user can access database tables listed in [Table B-1](#).

The following key features are provided by this Oracle APEX component:

- **Object Browser**
Object Browser enables a tree control to view object properties and create new objects.
- **SQL Commands**
The SQL Commands tool enables a user to execute ad hoc SQL on the APEX schema.
- **SQL Scripts**
SQL Scripts enables a user to store and run scripts on the APEX schema.
- **Query Builder**
Query Builder enables a user to create join queries using drag and drop.
- **Create Object Wizard**
Create object wizard provides a user-friendly interface for the user to create various database objects. This helps the user create tables, view, sequence, packages and so on, on the current APEX schema.

Figure B-1 SQL Workshop

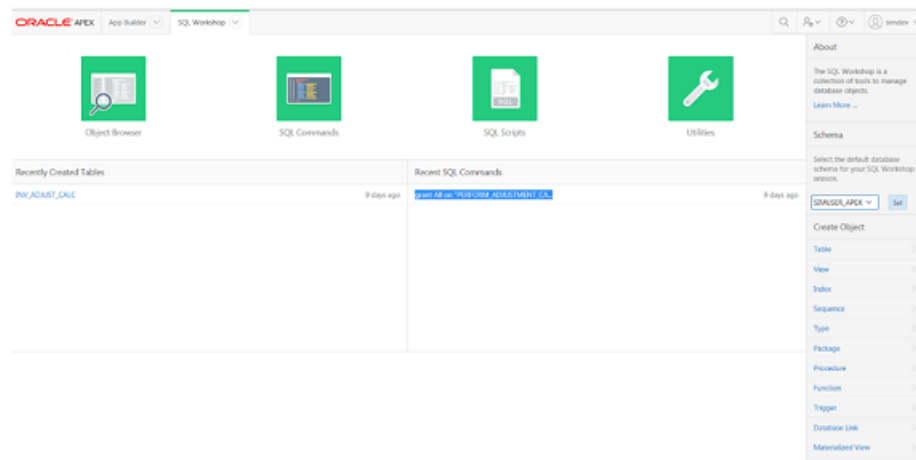

APEX Users, Administration

There are two (2) types of users:

- [APEX Installation Admin](#)
- [APEX Customer Admin/Developer](#)

APEX Installation Admin

This user (SIOCS_APEX_ADMIN) gets created during APEX installation at the time of provisioning and is administered by Oracle Cloud Operations.

The initial APEX customer administrator user is provided access to the workspace by this user.

This user will provide the necessary privileges to the customer users and block the unwanted features from APEX (REST Service, Team Development and so on.)

APEX Customer Admin/Developer

This user is the Customer Service Administrator entered into the system during the Cloud Subscription ordering process. Access to the SIOCS_READ_WRITE or SIOCS_READ_ONLY workspace is granted to this user at the time of environment provisioning depending on the environment type, that is, non-production or production respectively.

This initial user will be required to login to the ORDS (Apex Data Viewer) URL (https://<eics_external_load_balancer_address>/<CUST_ENV>/ords) in order to add other customer users to the workspace.

The Administrator is required to provision users to have access to the workspace.

For more information on various administrator activities, please check the *Oracle Application Express Release 20.2 Administer Guide* at the following website:

<https://docs.oracle.com/en/database/oracle/application-express/20.2/admin.html>

APEX_READ_ONLY_SCHEMA_USER, for example, RTLWSP01	Database user has READ privilege on EICS database objects listed in Table B-1 .
---	---

APEX_READ_WRITE_SCHEMA_USER, for example, RTLWSP01_RW	Database user has READ and WRITE privilege on EICS database objects listed in Table B-1 .
---	---

Database Objects

The list of database objects available on APEX as synonyms.

Tables

Table B-1 Tables

Name	Description
ACTIVITY_DELIVERY	This table holds store activity information for receiving.
ADDRESS	This table holds the various addresses for the entities that is, store, supplier, finisher and warehouse along with their types.
ARV_ACTIVITY_HIST	This table holds archived data from user activity table.
ARV_EXPORT	This table contains last export archive activity info.
ARV_ITEM_UIN_HIST	This table contains item UIN archived data.
ARV_RFID_HIST	This table contains RFID transactions archived data.
ARV_STORE_ITEM_STOCK_HIST	This table contains store item stock transaction archived data.
ARV_TICKET_HIST	This table contains ticket history archived data.
CODE_DETAIL	This table holds the defined available code along with their type descriptions that are used in the system.
CODE_TYPE	This table contains one row for each different set of codes used by the system. The specific codes are defined in the CODE_DETAIL table.
CUSTOM_ATT_ADMIN	This table contains the list of custom attributes configured for the transactions.
DELIVERY_SLOT	This table is delivery slot master table, values are from RMS. (Reserved for future use.)
DIFFERENTIATOR	This table will hold all possible sizes, size combinations, colors, flavors, scents, patterns, and so on, along with their associated NRF industry codes. For example, include blue for a differentiator type of color, large for a differentiator type of size, and lavender for a differentiator type of scent.
DIFFERENTIATOR_TYPE	This table holds the available differentiator types that an item can contain. For example, Size, Color, Scent, and so on.
DLS_PRICE	Data Loading Staging table holds the price data loaded from third party price import file.
DLS_RFID	Data Loading Staging table holds the RFID data loaded from third party RFID import file.
DSD	This table holds one row for each direct supplier delivery (DSD) that is received in the system.
DSD_ADJUSTMENT	This table holds direct supplier delivery (DSD) adjustments.
DSD_CARTON	This table holds one row for each carton that a direct supplier delivery (DSD) contains.
DSD_CARTON_CDA	This table contains the values for the custom attributes associated to a vendor delivery carton.
DSD_CARTON_CFA	This table contains the list of custom flex attribute associated to the vendor delivery carton.
DSD_CDA	This table contains the values for the custom attributes associated to a vendor delivery.
DSD_CFA	This table contains the list of custom flex attribute associated to the vendor delivery.

Table B-1 (Cont.) Tables

Name	Description
DSD_LINE_ITEM	This table holds one row for each item that is in the carton of a direct supplier delivery (DSD).
DSD_LINE_ITEM_ATT	This table holds extended attributes associated to direct supplier delivery (DSD) line items.
DSD_LINE_ITEM_UIN	This table holds the specific UIN information associated with the direct supplier delivery (DSD) line items.
FUL_ORD	This table holds store fulfillment orders.
FUL_ORD_BIN	This table holds bins created for picks of store fulfillment orders.
FUL_ORD_CDA	This table holds the values for the custom attributes associated to a fulfillment order.
FUL_ORD_CFA	This table contains the list of custom flex attribute associated to the fulfillment order.
FUL_ORD_DLV	This table holds deliveries created for store fulfillment orders.
FUL_ORD_DLV_CDA	This table contains the values for the custom attributes associated to a fulfillment order delivery.
FUL_ORD_DLV_LINE_ITEM	This table holds the fulfillment order delivery line items.
FUL_ORD_DLV_LINE_ITEM_ATT	This table holds extended attributes associated to line items of deliveries for store fulfillment orders.
FUL_ORD_DLV_LINE_ITEM_UIN	This table holds the UINs of line items for deliveries of store fulfillment orders.
FUL_ORD_LINE_ITEM	This table holds store fulfillment order line items.
FUL_ORD_PICK	This table holds picks created for store fulfillment orders.
FUL_ORD_PICK_CDA	This table contains the values for the custom attributes associated to a fulfillment order pick.
FUL_ORD_PICK_LINE_ITEM	This table holds line items associated to a pick created for store fulfillment orders.
FUL_ORD_RV_PICK	This table holds reverse picks created for store fulfillment orders.
FUL_ORD_RV_PICK_CDA	This table contains the values for the custom attributes associated to a fulfillment order reverse pick.
FUL_ORD_RV_PICK_LINE_ITEM	This table contains line items associated to fulfillment order reverse picks.
GROUP_SCHEDULE_EXTRACT	This table holds the data populated via batch processes for today's process to do. The data will be cleared out at the end of the run.
ICLS_CLEARANCE	Integration Change Log Staging (ICLS) table holds the clearance price change records.
ICLS_PRICE_CHANGE	Integration Change Log Staging (ICLS) table holds the regular price change records.
IDLS_DIFFERENTIATOR	Initial Data Loading Staging (IDLS) tables contain the data loaded from initial data seeding files.
IDLS_DIFFERENTIATOR_TYPE	
IDLS_ITEM	
IDLS_ITEM_CFA	
IDLS_ITEM_COMPONENT	
IDLS_ITEM_DESCRIPTION	

Table B-1 (Cont.) Tables

Name	Description
IDLS_ITEM_HIER	
IDLS_ITEM_IMAGE	
IDLS_ITEM_UDA	
IDLS_PARTNER	
IDLS_PARTNER_ADDRESS	
IDLS_PARTNER_ITEM	
IDLS_RELATED_ITEM	
IDLS_RELATED_ITEM_TYPE	
IDLS_STORE	
IDLS_STORE_ADDRESS	
IDLS_STORE_ITEM	
IDLS_STORE_ITEM_CFA	
IDLS_STORE_ITEM_PRICE	
IDLS_STORE_ITEM_PRICE_HST	
IDLS_STORE_ITEM_STOCK	
IDLS_STORE_UIN_ADMIN_ITEM	
IDLS_SUPPLIER	
IDLS_SUPPLIER_ADDRESS	
IDLS_SUPPLIER_CFA	
IDLS_SUPPLIER_ITEM	
IDLS_SUPPLIER_ITEM_CTRY	
IDLS_SUPPLIER_ITEM_MFR	
IDLS_SUPPLIER_ITEM_UOM	
IDLS_SUPPLIER_ORG	
IDLS_SUPP_ITEM_CTRY_DIM	
IDLS_TRANSFER_ZONE	
IDLS_UDA	
IDLS_UDA_LOV	
IDLS_UOM_CLASS	
IDLS_UOM_CONVERSION	
IDLS_WAREHOUSE_ADDRESS	
IDLS_WAREHOUSE_ITEM	
IDLS_WAREHOUSE_VIRTUAL	
IDL_CONTROL	This table holds the Initial Data Loading (IDL) control records.
IDL_CONTROL_DETAIL	This table holds the Initial Data Loading control detail records.
IDL_LOG	This table holds the Initial Data Loading log records.
IDL_TYPE	This table holds the Initial Data Loading module type records.

Table B-1 (Cont.) Tables

Name	Description
INV_ADJUST	This table holds the inventory adjustment records.
INV_ADJUST_CDA	This table holds the values for the custom attributes associated to inventory adjustments.
INV_ADJUST_LINE_ITEM	The table holds the item associated to the inventory adjustments.
INV_ADJUST_LINE_ITEM_ATT	This table holds extended attributes associated to line items of inventory adjustments.
INV_ADJUST_LINE_ITEM_UIN	This table holds the UIN associated to inventory adjustments.
INV_ADJUST_REASON	This table holds the defined reason codes that are available for attaching to a stock inventory adjustment. Each reason code contains a disposition.
INV_ADJUST_TEMPLATE	The table holds defined the inventory adjustment templates.
INV_ADJUST_TEMPLATE_ITEM	This table holds the line item associated to the defined inventory adjustment templates.
ITEM	This table contains one record for each item defined for the company. It contains the base information for an item that is consistent across all locations.
ITEM_BASKET	This table stores data about Item Basket transactions.
ITEM_BASKET_CDA	This table contains the values for the custom attributes associated to an item basket.
ITEM_BASKET_HIERARCHY	This table holds one row for each level of the hierarchy that is assigned to the item basket.
ITEM_BASKET_LINE_ITEM	This table contains items on an Item Basket.
ITEM_CFA	This table contains the list of custom flex attribute associated to the item.
ITEM_COMPONENT	This table defines all of the items contained within a simple or complex pack item. For a simple pack there will be only one record for the pack item listing its member item and a complex pack will have more than one record denoting pack component listing.
ITEM_HIERARCHY	This table holds merchandise hierarchy information.
ITEM_HIERARCHY_ATTRIB	This table holds extended attributes assigned to item hierarchies at a store.
ITEM_IMAGE	This table holds the item image information.
ITEM_PRICE	This table holds one row for each price change. These can either be created by EICS, if the store is allowed to control the pricing or they are loaded in from an external system (that is, RPM).
ITEM_PRICE_HISTORY	This table holds historical archive of the retail-selling unit price at which a given item is being sold.
ITEM_QR_CODE	This table contains the item QR code image information.
ITEM_UDA	This table holds all the User Defined Attribute (UDA) entries associated with a specific item.
ITEM_UIN	This is the primary UIN table holding detailed information about a specific UIN, most significantly its current status.
ITEM_UIN_HISTORY	This tables holds records of each alteration or action taken upon the ITEM_UIN table with basic auditing information added.
ITEM_UIN_PROBLEM	This table holds a list of UIN state transformations that failed for some reason. There is an old and new status to help determine what the issue is. This list can be viewed and updated in the UIN Resolution screen.

Table B-1 (Cont.) Tables

Name	Description
MPS_STAGED_MESSAGE	<p>This table holds the staged inbound and outbound messages from and to external systems.</p> <p>Note: APEX limitation on CLOB columns: For clob column types, users need to write their query to display first 4000 characters.</p> <p>For example:</p> <pre>[select id, business_id, DBMS_LOB.SUBSTR(MESSAGE_data,4000) as message_data, DBMS_LOB.SUBSTR(MESSAGE_ERROR,4000) as message_error from mps_staged_message;]</pre>
NONSELLABLE_TYPE	This table holds the non-sellable quantity types.
NOTES	This table holds user-defined notes for different transactions.
PARTNER	This table holds partner information.
PARTNER_ITEM	This table holds items at partner site.
POS_TRANSACTION	This table will hold the details of the POS transaction header and the line items in the transaction.
POS_TRANSACTION_LOG	This table holds the POS transaction processing logs.
PRICE_CHANGE_WORKSHEET	This is a working table that holds the new prices to be extracted into item price table.
PRODUCT_BASKET	This table stores data about product basket transactions.
PRODUCT_BASKET_STORE	This tables holds one record for each store that is assigned to the product basket.
PRODUCT_GROUP	This table holds all product groups that are created within the system. Product Groups are used to schedule events within the system that need to occur at certain times. Product Groups are used for item requests, stock counts (including unit, unit and amount and problem lines), replenishment and wastage.
PRODUCT_GROUP_HIERARCHY	This table holds one row for each level of the hierarchy that is assigned to the product group.
PRODUCT_GROUP_ITEM	This table holds one row for each item that has been added to the product group. It holds items that are added to the product group via the item, supplier or promotion options. For supplier and promotion (which is only used for item request type product groups), only those items that have a replenishment type of SO are added. For the item option, any item specified will be added to the product group.
PRODUCT_GROUP_SCHEDULE	This table holds the defined schedule for any product group of how often the batch program should process the items that belong to the product group.
PRODUCT_GROUP_SCHED_STORE	This table holds one record per store that belongs to the defined product group schedule.
PROD_GROUP_ITEM_BKDN	This is a temporary table that holds product group schedule items breakdown details defined by the product group schedule or product group hierarchy. It is used in product group related event generation.
PURCHASE_ORDER	This table holds one row for each purchase order per location that has been placed by the company. The purchase order may have been created via a merchandise system message or when a user starts to process a direct store delivery (DSD).
PURCHASE_ORDER_CFA	This table contains the list of custom flex attribute associated to the purchase order.
PURCHASE_ORDER_LINE_ITEM	This table holds items that are associated with respective purchase orders.

Table B-1 (Cont.) Tables

Name	Description
RELATED_ITEM	This table contains related item information.
RELATED_ITEM_TYPE	This table holds relationships of related items.
REPLENISH_GAP	This table holds one row per replenishment gap.
REPLENISH_GAP_CDA	This table contains the values for the custom attributes associated to a replenishment gap.
REPLENISH_GAP_LINE_ITEM	This table hold one row per item associated with replenishment gap.
RFID	This table holds the RFID information.
RFID_ADJUST	This table contains the RFID adjustment information.
RFID_HISTORY	This table contains the RFID history information.
RFID_ZONE	This table holds the RFID zone information.
RTV	This table holds header level information of a vendor return document.
RTV_CDA	This table contains the values for the custom attributes associated to a vendor return.
RTV_CFA	This table contains the list of custom flex attribute associated to the vendor return.
RTV_LINE_ITEM	This table hold one record per item associated with vendor return documents.
RTV_SHIP	This table holds one record of header level information for each RTV Shipment.
RTV_SHIP_CARTON	This table holds RTV Shipment Container associated with the respective RTV Shipment record.
RTV_SHIP_CARTON_CDA	This table contains the values for the custom attributes associated to a vendor shipment carton.
RTV_SHIP_CDA	This table contains the values for the custom attributes associated to a vendor shipment.
RTV_SHIP_LINE_ITEM	This table holds items associated with RTV shipment container per RTV shipment record.
RTV_SHIP_LINE_ITEM_ATT	This table holds extended attributes associated to line items of RTV shipment.
RTV_SHIP_LINE_ITEM_UIN	This table hold associated UIN records for each RTV Shipment line items.
SCAN_BLOCK	This table contains item scan block summary for associated transaction.
SCAN_BLOCK_ITEM	This table contains item detail of scanned items within a block.
SCAN_BLOCK_ITEM_ATT	This table contains extended attributes associated to an item of a scan block.
SCHEDULE_GROUP_ITEM	This is a temporary table that holds the items associated with the store product group schedule.
SEQUENCE_ADMIN	This table contains information about sequence settings for integration.
SHELF_ADJUST	This table holds one record for each shelf adjustment transaction.
SHELF_ADJUST_CDA	This table contains the values for the custom attributes associated to a shelf adjustment.
SHELF_ADJUST_LINE_ITEM	This table holds line item details of the items in a shelf adjustment list.
SHELF_REPLENISH	This table holds one record per shelf replenishment transaction.

Table B-1 (Cont.) Tables

Name	Description
SHELF_REPLENISH_BKDN	This table temporarily holds shelf replenishment item breakdown depending on the UI limit parameter.
SHELF_REPLENISH_CDA	This table contains the values for the custom attributes associated to a shelf replenishment.
SHELF_REPLENISH_LINE_ITEM	This table holds one record per item associated with respective shelf replenishment.
SHIPMENT_BOL	This table holds bill of lading records.
SHIPMENT_CARRIER	This table holds delivery carriers.
SHIPMENT_CARRIER_SERVICE	This table holds delivery service types.
SHIPMENT_CARTON_DIM	This table hold the delivery carton dimension information.
SHIPMENT_REASON	This table holds the shipment reasons.
SHIPMENT_WEIGHT_UOM	This table hold shipment weight UOM information.
STOCK_COUNT	This table will hold one row for each stock count in the system. It defines the stock count instances of a stock count schedule. These records are generated by the batch processes using the stock count schedules defined.
STOCK_COUNT_CDA	This table contains the values for the custom attributes associated to a stock count.
STOCK_COUNT_CHILD	This table holds a row for each location that is being counted for the stock count.
STOCK_COUNT_EXPORT	This table holds the stock count line item to be exported to external system.
STOCK_COUNT_IMPORT	This table holds the third-party file information for a third party stock count. The file must follow the RGIS file layout definition.
STOCK_COUNT_LINE_ITEM	This table holds the one record per line item counted on the respective stock count. Each row holds the complete details of the snapshot, counted, recounted (when applicable) and authorized quantities and timestamp.
STOCK_COUNT_LINE_ITEM_ATT	This table holds extended attributes associated to line items of stock counts.
STOCK_COUNT_LINE_ITEM_RFID	This table contains the RFID data for stock count line items.
STOCK_COUNT_LINE_ITEM_UIN	This table holds all the UINs that are assigned to a particular line item on a stock count. It also contains whether the UIN is counted, recounted, or authorized. It is de-normalized to include the UIN description for performance.
STOCK_COUNT_REJECTED_ITEM	This table contains rejected items from third party stock count.
STOCK_COUNT_SALE	This table will hold the details of the POS transaction header and the line items in the transaction with open stock counts.
STORE	This table holds defined stores within the organization that hold items.
STORE_AUTO_RECEIVE	This table holds mapping of defined stores that will automatically receive stock transfers in from another store.
STORE_GROUP	This table holds the mapping of buddy store relationship for all stores in the system.
STORE_ITEM	This table holds the items which are ranged to a store.
STORE_ITEM_CFA	This table holds the list of custom flex attribute associated to the item for the ranged store.

Table B-1 (Cont.) Tables

Name	Description
STORE_ITEM_STOCK	This table holds the current inventory numbers for items on a location basis. The types of inventory buckets that are held include available for sale, unavailable for sale, in transit, and reserved for a pending stock inventory event.
STORE_ITEM_STOCK_HISTORY	This table holds the store item stock transaction history.
STORE_ITEM_STOCK_NONSELL	This table holds non-sellable store item stock information.
STORE_ITEM_STOCK_PUBLISH	This table holds stock adjustment information for external messaging. Records are deleted when processed.
STORE_ORDER	This table contains store order header information.
STORE_ORDER_CDA	This table contains the values for the custom attributes associated to Store Order.
STORE_ORDER_CFA	This table contains store order custom flexible attribute information.
STORE_ORDER_LINE_ITEM	This table contains store order line item information.
STORE_PRINTER	This tables holds the associated printers with the retail stores in which the printers are installed.
STORE_SEQUENCE_AREA	This table holds a floor and an area on a floor inside a retail store that is explicitly identified for tracking inventory, sales activity and other business activities that are important to measuring a stores performance.
STORE_SEQUENCE_ITEM	This table defines a map of an item to a location and what order the item is in within the location.
STORE_SHIP_NETWORK	This table defines the stores that are excluded from shipping-to location for transfer documents and transfer shipments.
STORE_TRANSFER_ZONE	This table holds all transfer zones defined for a given company. Each store can be assigned one transfer zone which limits which locations can move inventory between them.
STORE_UIN_ADMIN_DEPT	This table holds the UIN specific attributes of an item at a store by department and class.
STORE_UIN_ADMIN_ITEM	This table holds all the UIN specific attributes of an item at a store (such as type and label). This overrides the values in STORE_UIN_ADMIN_DEPT table value.
SUPPLIER	This table holds all of the external sources for merchandise items offered for sale for the company.
SUPPLIER_CFA	This table holds the list of flex attribute associated to the supplier.
SUPPLIER_ITEM	This table holds one row for each item/supplier combination within the system.
SUPPLIER_ITEM_CFA	This table contains the list of custom flex attribute associated to the item for supplier.
SUPPLIER_ITEM_COUNTRY	This table holds one entry for each country associated with an item/supplier. It is used to determine what the case size of an item will be for a particular supplier in the same country as the store.
SUPPLIER_ITEM_COUNTRY_DIM	This table holds dimensions for each item, supplier, supplier country and dimension object combination.
SUPPLIER_ITEM_MANUFACTURE	This table hold country of manufacture for a given item-supplier.
SUPPLIER_ITEM_UOM	This table holds the item supplier data. It also contains the suppliers UOM information.

Table B-1 (Cont.) Tables

Name	Description
SUPPLIER_ORGANIZATION	This table holds supplier organization information.
TICKET	This table contains tickets.
TICKET_EVENT	This table contains ticket events to generate tickets.
TICKET_FORMAT	This table contains ticket formats.
TICKET_FORMAT_BASKET	This table contains tickets format and item basket assignment information.
TICKET_FORMAT_BASKET_STORE	This table contains stores assigned to a ticket format and item basket assignment record.
TICKET_HISTORY	This table contains ticket history data.
TICKET_ZPL	This table contains ticket formats.
TOLERANCE	This table holds one row for each ad hoc stock count that is initiated at a store.
TRAN_EVENT	This table contains transaction event header information.
TRAN_EVENT_ATTRIBUTE	This table contains transaction event attribute information. The attribute value will be populated depending on the associate transaction event type.
TRAN_EVENT_COMPONENT	This table contains components assigned to the transaction event information.
TRAN_EVENT_EXTRACT	Batch process will populate this table with today's process to do and will clear out at the end of the run.
TRAN_EVENT_ITEM_BKDN	Temporary table holds transaction event items breakdown details defined by the transaction event. This table is used in transaction event related batch generation.
TRAN_EVENT_STORE	This table contains transaction event store association information.
TSF	This table contains the transfer document which captures the request for a transfer to a store, warehouse, or finisher.
TSF_ALLOCATION	This table contains transfer stock allocated to the locations.
TSF_CDA	This table contains the values for the custom attributes associated to a transfer.
TSF_CFA	This table contains the list of custom flex attribute associated to the transfer.
TSF_DELV	This table hold one row for each transfer delivery transaction. The header level information for the delivery is captured on this table.
TSF_DELV_CARTON	This table holds one row for each transfer delivery carton received for the respective transfer delivery transaction record.
TSF_DELV_CARTON_CDA	This table contains the values for the custom attributes associated to a transfer delivery carton.
TSF_DELV_CARTON_CFA	This table contains the list of custom flex attribute associated to the transfer delivery carton.
TSF_DELV_CDA	This table contains the values for the custom attributes associated to a transfer delivery.
TSF_DELV_CFA	This table contains the list of custom flex attribute associated to the transfer delivery.
TSF_DELV_LINE_ITEM	This table holds one row for each item received on the containers associated to respective transfer delivery transactions.
TSF_DELV_LINE_ITEM_ATT	This table holds extended attributes associated to line items of transfer delivery transaction.

Table B-1 (Cont.) Tables

Name	Description
TSF_DELV_LINE_ITEM_UIN	This table holds UINs associated to line items of transfer delivery transaction.
TSF_LINE_ITEM	This table holds one row for each item associated with the transfer document.
TSF_SHIP	This table holds one row for each transfer shipment transaction. The header level information for the shipment is captured on this table.
TSF_SHIP_CARTON	This table holds one row for each transfer shipment carton to be shipped for the respective transfer shipment transaction record.
TSF_SHIP_CARTON_CDA	This table contains the values for the custom attributes associated to a transfer shipment carton.
TSF_SHIP_CDA	This table contains the values for the custom attributes associated to a transfer shipment.
TSF_SHIP_LINE_ITEM	This table holds one row for each item to be shipped on the containers associated to respective transfer shipment transactions.
TSF_SHIP_LINE_ITEM_ATT	This table holds extended attributes associated to line items of transfer shipment transaction.
TSF_SHIP_LINE_ITEM_UIN	This table holds UINs associated to line items of transfer shipment transaction.
UDA	This table holds all the User Defined Attributes (UDAs) available to items.
UDA_LOV	This table holds all valid values associated with a User Defined Attribute (UDA) of UDA Type of LOV (List of Value)
UIN_ATTRIBUTE_IMPORT	This table holds the UIN Attributes for store.
UIN_LABEL	This table holds all the labels that are available in the system for a UIN.
WAREHOUSE	This table holds warehouse information.
WAREHOUSE_ITEM	This table holds items ranged to a warehouse.
WAREHOUSE_VIRTUAL	This table contains all warehouses in the system, including virtual and physical warehouses.

Views**Table B-2 Views**

Name	Description
CUST_ORDER_MGMT_LIST_V	This view load data for respective transaction which is been associated with store fulfillment order. Transaction queried for this view are DSD, Purchase Order, Transfer Receiving, Transfer, Transfer Shipment and Customer Order Delivery.
IDLV_ADDRESS	Initial Data Loading Views (IDLV_<table>).
IDLV_DIFFERENTIATOR	
IDLV_DIFFERENTIATOR_TYPE	
IDLV_ITEM	
IDLV_ITEM_CFA	
IDLV_ITEM_COMPONENT	
IDLV_ITEM_DESCRIPTION	
IDLV_ITEM_HIER	

Table B-2 (Cont.) Views

Name	Description
IDLV_ITEM_IMAGE	
IDLV_ITEM_UDA	
IDLV_PARTNER	
IDLV_PARTNER_ADDR	
IDLV_PARTNER_ITEM	
IDLV_RELATED_ITEM	
IDLV_RELATED_ITEM_TYPE	
IDLV_STORE	
IDLV_STORE_ADDR	
IDLV_STORE_ITEM	
IDLV_STORE_ITEM_CFA	
IDLV_STORE_ITEM_PRICE	
IDLV_STORE_ITEM_PRICE_HIST	
IDLV_STORE_ITEM_STOCK	
IDLV_STORE_ITEM_STOCK_NONSELL	
IDLV_STORE_UIN_ADMIN_ITEM	
IDLV_SUPPLIER	
IDLV_SUPPLIER_ADDR	
IDLV_SUPPLIER_CFA	
IDLV_SUPPLIER_ITEM	
IDLV_SUPPLIER_ITEM_COUNTRY	
IDLV_SUPPLIER_ITEM_COUNTRY_DIM	
IDLV_SUPPLIER_ITEM_MANUFACTURE	
IDLV_SUPPLIER_ITEM_UOM	
IDLV_SUPPLIER_ORGANIZATION	
IDLV_TRANSFER_ZONE	
IDLV_UDA	
IDLV_UDA_LOV	
IDLV_UIN_LABEL	
IDLV_UOM_CLASS	
IDLV_UOM_CONVERSION	
IDLV_WAREHOUSE	
IDLV_WAREHOUSE_ADDR	
IDLV_WAREHOUSE_ITEM	
IDLV_WAREHOUSE_VIRTUAL	

Table B-2 (Cont.) Views

Name	Description
ITEM_DIFFERENTIATOR_V	This view loads one row for each item to which contains has associated differentiator data. All the differentiators for an item, its types and description are selected as a single row.
ITEM_HIERARCHY_ATTRIB_V	This view loads mapping of extended attribute to the item hierarchy.
ITEM_LIST_V	This view loads minimal or summary information for an item.
ITEM_PRICE_V	This view loads minimal or summary information about the price changes for an item.
ITEM_UDA_V	This view loads information for the user defined attribute (UDA) for an item.
LOCATION_V	This view loads data for all the location entity available in system that is, Supplier, Store, Warehouse and Finisher.
PRODUCT_GROUP_SCHEDULE_V	This view loads data containing Product Group Schedule information.
PROMOTION_V	This view loads data related to Price Promotion for each store.
RPRT_DSD_DISCREPANT_ITM_V	This view is used for populating the data on Direct Delivery Discrepant Items report.
RPRT_DSD_V	This view is used for populating the data on Direct Delivery Report.
RPRT_FUL_ORD_BIN_V	This view is used for populating the data on Customer Order Bin Label.
RPRT_FUL_ORD_DLV_BOL_V	This view is used for populating the data on Customer Order Delivery BOL Report.
RPRT_FUL_ORD_DLV_V	This view is used for populating the data on Customer Order Report.
RPRT_FUL_ORD_PICK_DISC_V	This view is used for populating the data on Customer Order Pick Discrepancy Report.
RPRT_FUL_ORD_PICK_V	This view is used for populating the data on Customer Order Pick Report.
RPRT_FUL_ORD_RV_PICK_V	This view is used for populating the data on Customer Order Reverse Pick Report.
RPRT_FUL_ORD_V	This view is used for populating the data on Customer Order Report.
RPRT_INV_ADJUST_V	This view is used for populating the data on Inventory Adjustment Report.
RPRT_ITEM_DETAIL_V	This view is used for populating the data on Item Detail Report.
RPRT_ITEM_ORDER_QTY_V	This view is used for populating the order quantities on Item Detail Report.
RPRT_PURCHASE_ORD_V	This view is used for populating the data on Purchase Order Report.
RPRT_REPLENISH_GAP_V	This view is used for populating the data on Scan List Report.
RPRT_RFID_HISTORY_V	This view is used for populating the data on RFID History Report.
RPRT_RTV_SHIP_BOL_V	This view is used for populating the data on RTV Shipment BOL Report.
RPRT_RTV_SHIP_V	This view is used for populating the data on RTV Shipment Report.
RPRT_RTV_V	This view is used for populating the data on RTV Report.
RPRT_SHELF_ADJUST_V	This view is used for populating the data on Shelf Adjustment Report.
RPRT_SHELF_REPLENISH_V	This view is used for populating the data on Shelf Replenishment Report.
RPRT_STOCK_COUNT_NOF_V	This view is used for populating the data on Stock Count Rejected Items Report.
RPRT_STOCK_COUNT_V	This view is used for populating the data on Stock Count related reports.
RPRT_STORE_ORDER_V	This view is used for populating the data on Store Order Report.

Table B–2 (Cont.) Views

Name	Description
RPRT_TRANSFER_V	This view is used for populating the data on Transfer Report.
RPRT_TSF_DELV_V	This view is used for populating the data on Transfer Receiving related reports.
RPRT_TSF_SHIP_V	This view is used for populating the data on Transfer Shipment related reports.
STOCK_ITEM_V	The view selects required item related attribute and inventory information to which represent a complete Item.
STORE_AUTO_RECEIVE_V	This view loads the mapping for stores which are defined to auto receive the stock transfer from a give store.
STORE_GROUP_V	This view loads the buddy store related information.
STORE_SHIP_NETWORK_V	This view has details about store hipping network.
SUPPLIER_ITEM_COUNTRY_V	This view load item supplier country information for which item supplier mapping exists.
TICKET_FORMAT_BASKET_V	The unique identifier for the ticket format and item basket assignment record.
TOLERANCE_V	This view loads the tolerance related information for Ad hoc Stock Count (topic = 0) and Customer Order Picking (topic = 1)
UIN_TYPE_V	This view loads the UIN related information about an item for a specific store.

Packages

Table B–3 Packages

Package Functions	Parameters	Description
DATE_UTILS.PRINT_TIMESTAMP	inDate IN timestamp	This function print timestamp.
DATE_UTILS.CONVERT_TIME_ZONE	I_date IN timestamp I_from_time_zone IN varchar2 I_to_time_zone IN varchar2	This function converts date from one time zone to another time zone. If the from time zone is not provided, DB time zone will be used as default.
DATE_UTILS.GET_DATE_AT_START_OF_DAY	I_date timestamp I_time_zone varchar2	This function returns a current day resets to midnight in the current time zone.
DATE_UTILS.GET_DATE_AT_END_OF_DAY	I_date timestamp I_time_zone varchar2	This function returns a current day resets to midnight in the current time zone.
DATE_UTILS.GET_CURRENT_GMT	NA	This function returns current GMT timestamp.
DATE_UTILS.GET_CURRENT_GMT_NUMERIC	NA	This function returns current GMT timestamp in numeric.
TRANSLATION_UTIL.TRANSLATE	i_localeId IN number i_key IN varchar2	This function returns the translated text for given key if exists on translation tables.

Table B-3 (Cont.) Packages

Package Functions	Parameters	Description
DATE_UTILS.PRINT_TIMESTAMP	inDate IN timestamp	This function print timestamp.
DATE_UTILS.CONVERT_TIME_ZONE	I_date IN timestamp I_from_time_zone IN varchar2 I_to_time_zone IN varchar2	This function converts date from one time zone to another time zone. If the from time zone is not provided, DB time zone will be used as default.
DATE_UTILS.GET_DATE_AT_START_OF_DAY	I_date timestamp I_time_zone varchar2	This function returns a current day resets to midnight in the current time zone.

Use the links to get an in-depth knowledge about Oracle APEX features / components / configuration:

[APEX Documentation List](#)

[APEX Installation](#)

[Application Builder User's Guide](#)

[SQL Workshop Guide](#)

[End User's Guide](#)

To get started with and explore the feature on Oracle Application Express (APEX), visit the following site (free signup): <https://apex.oracle.com>