

Oracle Banking Digital Experience

OHS User Interface Configuration Guide

Release 18.3.0.0.0

Part No. F12056-01

December 2018

ORACLE®

OHS User Interface Configuration Guide
December 2018

Oracle Financial Services Software Limited
Oracle Park
Off Western Express Highway
Goregaon (East)
Mumbai, Maharashtra 400 063
India

Worldwide Inquiries:

Phone: +91 22 6718 3000

Fax: +91 22 6718 3001

www.oracle.com/financialservices/

Copyright © 2018, Oracle and/or its affiliates. All rights reserved.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are “commercial computer software” pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate failsafe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

This software or hardware and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

Table of Contents

1. Preface	4
1.1 Intended Audience	4
1.2 Documentation Accessibility	4
1.3 Access to OFSS Support	4
1.4 Structure.....	4
1.5 Related Information Sources.....	4
2. Pre-requisite	5
3. UI deployment	6
4. Configuration to run UI on Oracle HTTP Server	8
4.1 Authentication Configuration:	10
4.1.1 Configuring the OAM Authentication.....	10
4.1.2 Configuring the Non OAM Authentication	10
5. Oracle HTTP Server Commands	13
5.1 Starting Oracle HTTP Server Instances from the Command Line.....	13
5.2 Stopping Oracle HTTP Server Instances from the Command Line	13

1. Preface

1.1 Intended Audience

This document is intended for the following audience:

- Customers
- Partners

1.2 Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

1.3 Access to OFSS Support

Oracle customers have access to electronic support through My Oracle Support. For information, visit

<http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

1.4 Structure

This manual is organized into the following categories:

Preface gives information on the intended audience. It also describes the overall structure of the User Manual.

The subsequent chapters describes following details:

- Prerequisite
- UI Deployment
- Configuration / Installation

1.5 Related Information Sources

For more information on Oracle Banking Digital Experience Release 18.3.0.0.0, refer to the following documents:

- Oracle Banking Digital Experience Licensing Guide
- Oracle Banking Digital Experience Security Guide

2. Pre-requisite


OHS software along with instance should be available for use.

[Home](#)


3. UI deployment

Below steps needs to be performed for UI deployment on OHS server.


Copy the obdx.conf from OBDX_Installer/installables/ui/config directory into the instance config directory (where httpd.conf is present). httpd.conf file is present at {DOMAIN_HOME}/config/fmwconfig/components/OHS/componentName}

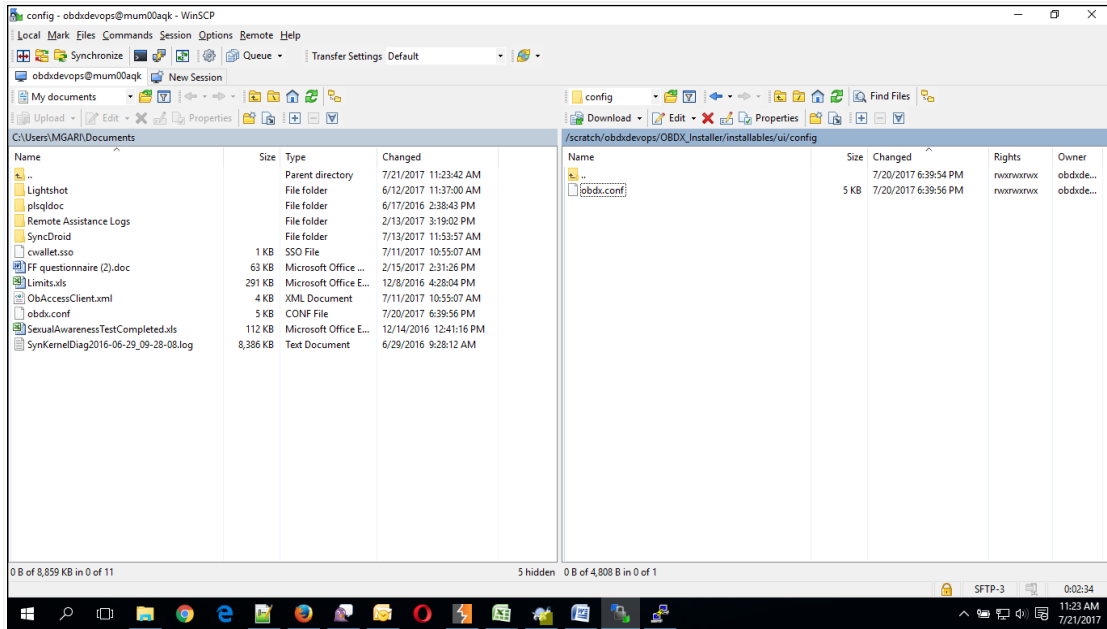

- Create a directory where obdx UI files would be deployed on OHS server.

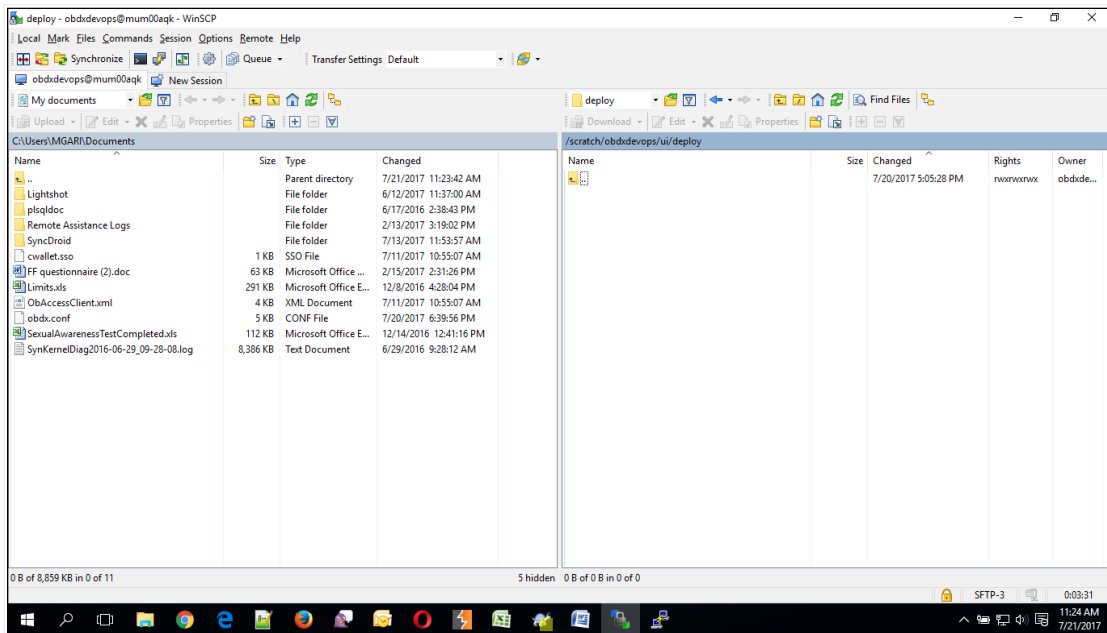

- Copy all files / directories from OBDX_Installer/installables/ui/deploy into newly created directory.

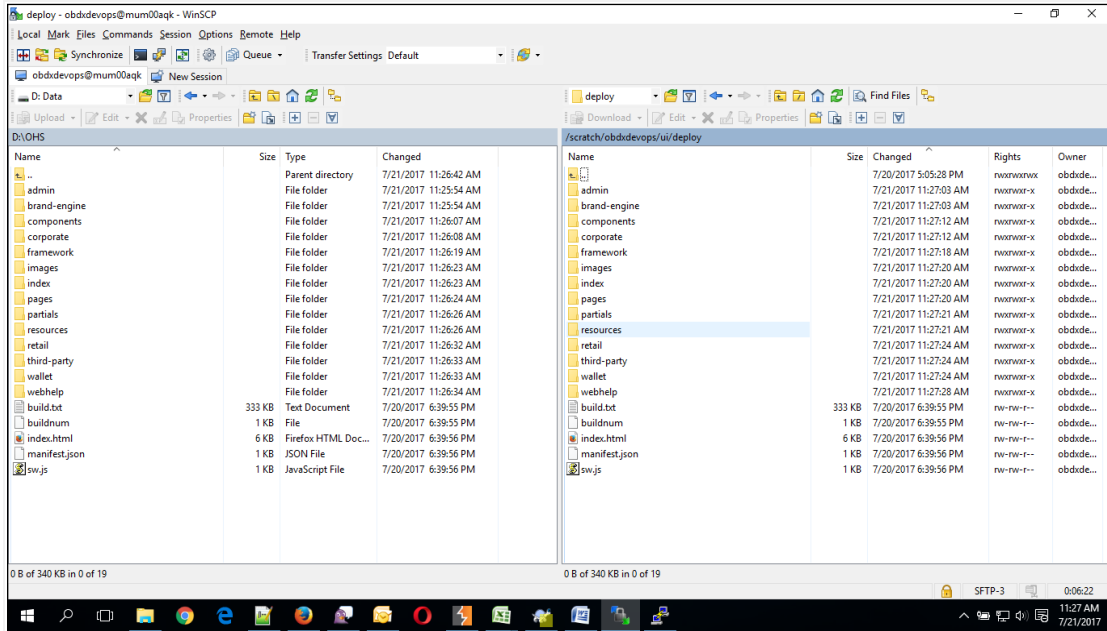

[Home](#)

4. Configuration to run UI on Oracle HTTP Server

Make sure following OHS modules must be loaded

- mod_rewrite.so
- mod_deflate.so
- mod_expires.so
- mod_mime.so
- mod_headers.so


Following are the changes needed to be done in the obdx.conf file and place this file in same folder where httpd.conf file exists.

1. Replace the <CHANNEL_PATH> (all occurrences) with the newly created directory (from previous UI deployment step).
2. Configuration for Content Security Policy, refer to the below document
Oracle Banking Digital Experience Security Guide

Include the obdx.conf into httpd.conf using below configuration

include "obdx.conf" (needs to be added in httpd.conf)

Read obdx.conf for inline documentation.

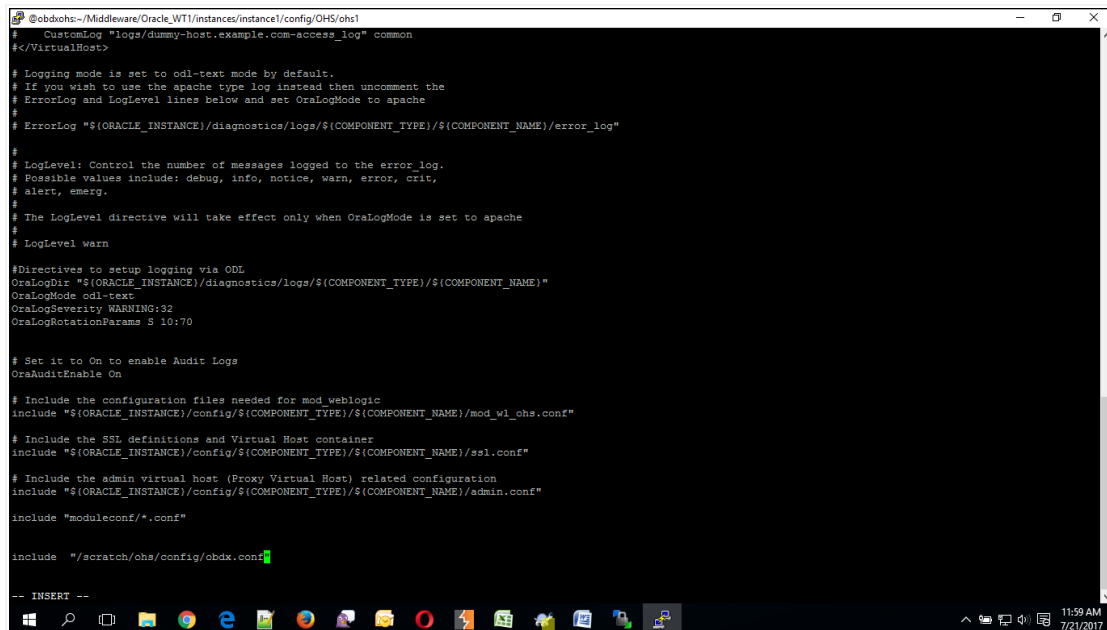

```

@obdxohs~/Middleware/Oracle_WT1/instances/instance1/config/OHS/ohs1
# CustomLog "logs/dummy-host.example.com-access_log" common
#</VirtualHost>

# Logging mode is set to odl-text mode by default.
# If you wish to use the apache type log instead then uncomment the
# ErrorLog and LogLevel lines below and set OraLogMode to apache
#
# ErrorLog "${ORACLE_INSTANCE}/diagnostics/logs/${COMPONENT_TYPE}/${COMPONENT_NAME}/error_log"
#
# LogLevel: Control the number of messages logged to the error_log.
# Possible values include: debug, info, notice, warn, error, crit,
# alert, emerg.
#
# The LogLevel directive will take effect only when OraLogMode is set to apache
#
# LogLevel warn

#Directives to setup logging via ODL
OraLogDir "${ORACLE_INSTANCE}/diagnostics/logs/${COMPONENT_TYPE}/${COMPONENT_NAME}"
OraLogMode odl-text
OraLogSeverity WARNING:32
OraLogRotationParams S 10:70

# Set it to On to enable Audit Logs
OraAuditEnable On

# Include the configuration files needed for mod_weblogic
include "${ORACLE_INSTANCE}/config/${COMPONENT_TYPE}/${COMPONENT_NAME}/mod_wl_ohs.conf"

# Include the SSL definitions and Virtual Host container
include "${ORACLE_INSTANCE}/config/${COMPONENT_TYPE}/${COMPONENT_NAME}/ssl.conf"

# Include the admin virtual host (Proxy Virtual Host) related configuration
include "${ORACLE_INSTANCE}/config/${COMPONENT_TYPE}/${COMPONENT_NAME}/admin.conf"

include "moduleconf/*.conf"

include "/scratch/ohs/config/obdx.conf"

-- INSERT --

```


Following are the changes need to be done in mod_wl_ohs.conf which is present at **{DOMAIN_HOME}/config/fmwconfig/components/OHS/{componentName}**

Copy below configuration into mod_wl_ohs.conf

```
<IfModule weblogic_module>
  WebLogicHost HOSTNAME
  WebLogicPort MANAGE_SERVER_PORT
  Debug ON
WLLogFile DIR/FILENAEME
  MatchExpression /digx/*
  MatchExpression /digx-auth/*
  MatchExpression /digx-social/*
</IfModule>
```

Configure below properties

- a. HOSTNAME – Weblogic server hostname (where OBDX weblogic domain is configured)
- b. MANAGE_SERVER_PORT – Weblogic manage server port (where OBDX application is deployed)
- c. DIR / FILENAME – Path where log file should be generated

Sample configuration (for reference purpose only)

```
<IfModule weblogic_module>
  WebLogicHost wls_server1
  WebLogicPort 7003
  Debug ON
  WLLogFile /tmp/weblogic_obp.log
  MatchExpression /digx/*
</IfModule>
```

```

@obdxohs-~/Middleware/Oracle_WT1/instances/instance1/config/OHS/ohs1
drwx----- 1 devops devops 4096 Nov 10 2016 fastcgi
drwx----- 1 devops devops 4096 Nov 10 2016 fcgi-bin
drwx----- 1 devops devops 4096 Nov 10 2016 httdocs
-rw-rw-r-- 1 devops devops 38092 Jul 21 06:29 httpd.conf
-rw-rw-r-- 1 devops devops 38047 Nov 10 2016 httpd.conf.ORIG
drwxr-xr-x 1 devops devops 4096 Nov 10 2016 icons
drwx----- 1 devops devops 4096 Nov 10 2016 keystores
-rw-rw-r-- 1 devops devops 12959 Nov 10 2016 magic
drwx----- 1 devops devops 4096 Nov 10 2016 man
drwx----- 1 devops devops 12288 Nov 10 2016 manual
-rw-rw-r-- 1 devops devops 15020 Nov 10 2016 mime.types
drwx----- 1 devops devops 4096 Nov 10 2016 mod_plsql
-rw-rw-r-- 1 devops devops 617 Jul 20 10:45 mod_wl_ohs.conf
drwx----- 1 devops devops 4096 Nov 10 2016 moduleconf
drwx----- 1 devops devops 4096 Nov 10 2016 proxy-wallet
-rw-rw-r-- 1 devops devops 2986 Nov 10 2016 ssl.conf
drwxr-xr-x 1 devops devops 4096 Nov 11 2016 webgate
-rw-rw-r-- 1 devops devops 2121 Nov 11 2016 webgate.conf
[devops@obdxohs ohs1]$
[devops@obdxohs ohs1]$
[devops@obdxohs ohs1]$
[devops@obdxohs ohs1]$ vi mod_wl_ohs.conf
[devops@obdxohs ohs1]$ cat mod_wl_ohs.conf
# NOTE : This is a template to configure mod_weblogic.
LoadModule weblogic_module      "${ORACLE_HOME}/ohs/modules/mod_wl_ohs.so"

# This empty block is needed to save mod_wl related configuration from EM to this file when changes are made at the Base Virtual Host Level
<IfModule weblogic_module>
    WebLogicHost mum00aok
    WebLogicPort 7003
    Debug ON
    WLogFile /tmp/weblogic.log
    MatchExpression /diq/*
</IfModule>

# <Location /weblogic>
#     SetHandler weblogic-handler
#     PathFrom /weblogic
#     ErrorPage http://WEBLOGIC_HOME:WEBLOGIC_PORT/
# </Location>
[devops@obdxohs ohs1]$

```

4.1 Authentication Configuration:

OBDX product ships with two type of authentication methods:

1. OAM Authentication
2. Non OAM Authentication

4.1.1 Configuring the OAM Authentication

By default OAM server URL is set as <http://mum00aon.in.oracle.com:14100/oam/server>


Replace it to your OAM server URL in the following files:

1. <CHANNEL_PATH>/components/login/login-form-web.js
2. <CHANNEL_PATH>/framework/js/constants/constants.js
 - a. Set the **authenticator** property as “**OUD**”.

4.1.2 Configuring the Non OAM Authentication

Configuring Non OAM Authentication implementer needs to change following files:

1. <CHANNEL_PATH>/framework/js/constants/constants.js
 - a. Set the **authenticator** property as “**OBDXAuthenticator**”.

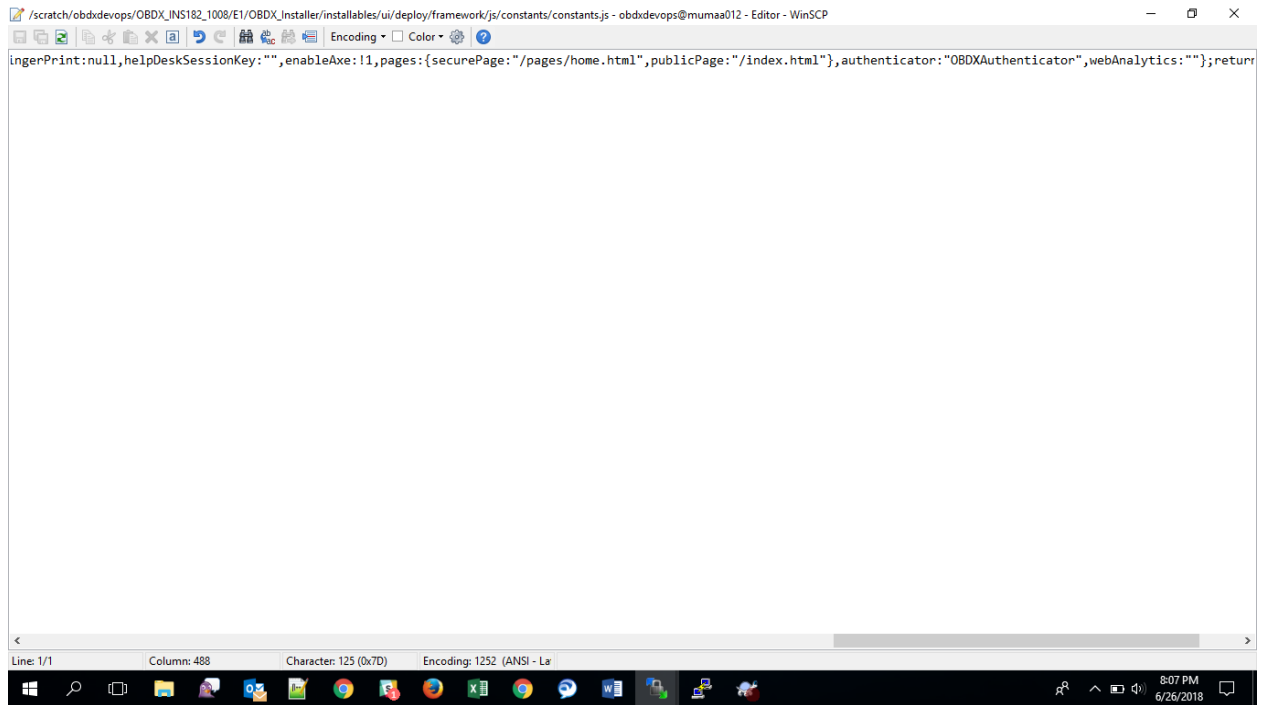

- i. In `{DOMAIN_HOME}/config/fmwconfig/components/OHS/{componentName}/httpd.conf` remove `webgate.conf` entry

Google Map Configuration:

By default Google map SDK URL is set as

<https://maps.googleapis.com/maps/api/js?key=AlzaSyCYFGuo6wj7CTEaBILF3qaRcJJWuYI53f8&libraries=geometry,places>

Replace it with your Google map SDK URL in the following files:

- `<CHANNEL_PATH>/components/inputs/map.js`
- `<CHANNEL_PATH>/components/location-maintenance/location-add.js`
- `<CHANNEL_PATH>/components/location-maintenance/location-update.js`
- `<CHANNEL_PATH>/components/atm-branch-locator/locator.js`

Social Media Configurations:

By default LinkedIn and Facebook API key is set as

LinkedIn Key: 86hg2yshsq76yd

Facebook Key: 233137313819556

Replace it to your social media API keys in the following files:

- `<CHANNEL_PATH>/components/social-media/facebook.js`

- <CHANNEL_PATH>/components/social-media/linkedin.js

Wallet Configurations:

By default OBDX Base server URL is set as <http://mum00apu.in.oracle.com:7777/digx/v1/>

Replace it to your OBDX Base server URL in the following files:

- <CHANNEL_PATH>/components/wallet-external/addfund.js
- <CHANNEL_PATH>/components/wallet/add_paymentMode.js

Since OBDX UI support subresource integrity and changing files mentioned above will impact it and files which are changed won't work. SHA hash for all files are maintained in **<CHANNEL_PATH>/framework/js/pages/security.js**. There are two ways for solving this problem:

- Remove the SHA hash of the changed files along with the file name in security.js
- Generate SHA hash of modified files and update it in the security.js

Once all above steps are completed, restart the OHS server.

For the restarting of the OHS Server first go to the bin directory of the OHS instance.

5. Oracle HTTP Server Commands

5.1 Starting Oracle HTTP Server Instances from the Command Line

You can start up Oracle HTTP Server instances from the command line via a script.

1. Ensure that Node Manager is running.
2. Enter the following command:

```
Linux or UNIX: $DOMAIN_HOME/bin/startComponent.sh componentName
```

```
Windows: %DOMAIN_HOME%\bin\startComponent.cmd componentName
```

For example:

```
$DOMAIN_HOME/bin/startComponent.sh ohs1
```

The startComponent script contacts the Node Manager and runs the nmStart() command.

When prompted, enter your Node Manager password. The system responds with these messages:

```
Successfully started server componentName...
Successfully disconnected from Node Manager...

Exiting WebLogic Scripting Tool.
```

5.2 Stopping Oracle HTTP Server Instances from the Command Line

You can stop Oracle HTTP Server instances from the command line via a script.

Enter the following command:

```
Linux or UNIX: $DOMAIN_HOME/bin/stopComponent.sh componentName
```

```
Windows: %DOMAIN_HOME%\bin\stopComponent.cmd componentName
```

For example:

```
$DOMAIN_HOME/bin/stopComponent.sh ohs1
```

This command invokes WLST and executes the nmKill() command. The stopComponent command will not function if the Node Manager is not running.

For more commands refer the following URL:

<https://docs.oracle.com/middleware/1221/webtier/administer-ohs/getstart.htm>

[Home](#)