

Oracle® Retail Xstore Office Cloud Service

Security Guide

Release 19.0

F25860-02

November 2020

Primary Author: Nishant Rao

Contributing Author:

Contributor:

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Value-Added Reseller (VAR) Language

Oracle Retail VAR Applications

The following restrictions and provisions only apply to the programs referred to in this section and licensed to you. You acknowledge that the programs may contain third party software (VAR applications) licensed to Oracle. Depending upon your product and its version number, the VAR applications may include:

- (i) the **MicroStrategy** Components developed and licensed by MicroStrategy Services Corporation (MicroStrategy) of McLean, Virginia to Oracle and imbedded in the MicroStrategy for Oracle Retail Data Warehouse and MicroStrategy for Oracle Retail Planning & Optimization applications.
- (ii) the **Wavelink** component developed and licensed by Wavelink Corporation (Wavelink) of Kirkland, Washington, to Oracle and imbedded in Oracle Retail Mobile Store Inventory Management.
- (iii) the software component known as **Access Via™** licensed by Access Via of Seattle, Washington, and imbedded in Oracle Retail Signs and Oracle Retail Labels and Tags.
- (iv) the software component known as **Adobe Flex™** licensed by Adobe Systems Incorporated of San Jose, California, and imbedded in Oracle Retail Promotion Planning & Optimization application.

You acknowledge and confirm that Oracle grants you use of only the object code of the VAR Applications.

Oracle will not deliver source code to the VAR Applications to you. Notwithstanding any other term or condition of the agreement and this ordering document, you shall not cause or permit alteration of any VAR Applications. For purposes of this section, "alteration" refers to all alterations, translations, upgrades, enhancements, customizations or modifications of all or any portion of the VAR Applications including all reconfigurations, reassembly or reverse assembly, re-engineering or reverse engineering and recompilations or reverse compilations of the VAR Applications or any derivatives of the VAR Applications. You acknowledge that it shall be a breach of the agreement to utilize the relationship, and/or confidential information of the VAR Applications for purposes of competitive discovery.

The VAR Applications contain trade secrets of Oracle and Oracle's licensors and Customer shall not attempt, cause, or permit the alteration, decompilation, reverse engineering, disassembly or other reduction of the VAR Applications to a human perceivable form. Oracle reserves the right to replace, with functional equivalent software, any of the VAR Applications in future releases of the applicable program.

Contents

Send Us Your Comments	vii
Preface	ix
Audience	ix
Documentation Accessibility	ix
Related Documents	ix
Customer Support	ix
Improved Process for Oracle Retail Documentation Corrections	x
Oracle Retail Documentation on the Oracle Technology Network	xi
Conventions	xi
1 Overview	
Product Overview	1-1
Identity Cloud Service	1-2
Cloud Deployment Overview	1-2
2 Security Features	
Security Model	2-1
Xstore Office Cloud Service Provisioning	2-1
Authentication	2-1
Multi-Factor Authentication (MFA)	2-2
Access Control	2-2
Security Audit	2-2
Credential Rotation	2-2
3 Security Considerations for Developers	
Creation of Users	3-1
IDCS	3-1
Manual Creation	3-1
Bulk Import	3-1
REST APIs	3-1
User Access AppRole	3-2
Xadmin	3-2
Xoffice OAuth Client AppRoles	3-2

User Access	3-2
Xstore Access	3-2
Data Privacy Access	3-3
Service Access	3-3
Cloud Enrollment of Xstore Clients	3-3
Xadmin.....	3-3
Xenvironment	3-3
Creation of the Setup OAuth Client in IDCS	3-4
Prerequisites.....	3-4
Required Data	3-4
Tools	3-5
Xstore Office Setup App.....	3-5

Send Us Your Comments

Oracle® Retail Xstore Office Cloud Service Security Guide, 19.0

Oracle welcomes customers' comments and suggestions on the quality and usefulness of this document.

Your feedback is important, and helps us to best meet your needs as a user of our products. For example:

- Are the implementation steps correct and complete?
- Did you understand the context of the procedures?
- Did you find any errors in the information?
- Does the structure of the information help you with your tasks?
- Do you need different information or graphics? If so, where, and in what format?
- Are the examples correct? Do you need more examples?

If you find any errors or have any other suggestions for improvement, then please tell us your name, the name of the company who has licensed our products, the title and part number of the documentation and the chapter, section, and page number (if available).

Note: Before sending us your comments, you might like to check that you have the latest version of the document and if any concerns are already addressed. To do this, access the Online Documentation available on the Oracle Technology Network Web site. It contains the most current Documentation Library plus all documents revised or released recently.

Send your comments to us using the electronic mail address: retail-doc_us@oracle.com

Please give your name, address, electronic mail address, and telephone number (optional).

If you need assistance with Oracle software, then please contact your support representative or Oracle Support Services.

If you require training or instruction in using Oracle software, then please contact your Oracle local office and inquire about our Oracle University offerings. A list of Oracle offices is available on our Web site at <http://www.oracle.com>.

Preface

The *Oracle® Retail Xstore Office Cloud Service Security Guide* describes the security features and security considerations for the Oracle Retail Xstore Office Cloud Service application.

Audience

This guide is for technical personnel who configure, maintain and support, or use Oracle Retail Xstore Office.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at

<http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit

<http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit

<http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

Related Documents

For more information, see the Oracle Retail Xstore Point- of-Service and Oracle Retail Xstore Office documentation set.

<http://www.oracle.com/technetwork/documentation/oracle-retail-100266.html>

Customer Support

To contact Oracle Customer Support, access My Oracle Support at the following URL:

<https://support.oracle.com>

When contacting Customer Support, please provide the following:

- Product version and program/module name
- Functional and technical description of the problem (include business impact)
- Detailed step-by-step instructions to re-create
- Exact error message received

- Screen shots of each step you take

Improved Process for Oracle Retail Documentation Corrections

To more quickly address critical corrections to Oracle Retail documentation content, Oracle Retail documentation may be republished whenever a critical correction is needed. For critical corrections, the republication of an Oracle Retail document may at times not be attached to a numbered software release; instead, the Oracle Retail document will simply be replaced on the Oracle Technology Network Web site, or, in the case of Data Models, to the applicable My Oracle Support Documentation container where they reside.

This process will prevent delays in making critical corrections available to customers. For the customer, it means that before you begin installation, you must verify that you have the most recent version of the Oracle Retail documentation set. Oracle Retail documentation is available on the Oracle Technology Network at the following URL:

<http://www.oracle.com/technetwork/documentation/oracle-retail-100266.html>

An updated version of the applicable Oracle Retail document is indicated by Oracle part number, as well as print date (month and year). An updated version uses the same part number, with a higher-numbered suffix. For example, part number E123456-02 is an updated version of a document with part number E123456-01.

If a more recent version of a document is available, that version supersedes all previous versions.

Oracle Retail Documentation on the Oracle Technology Network

Oracle Retail product documentation is available on the following web site:

<http://www.oracle.com/technetwork/documentation/oracle-retail-100266.html>

(Data Model documents are not available through Oracle Technology Network. You can obtain them through My Oracle Support.)

Conventions

The following text conventions are used in this document:

Convention	Meaning
boldface	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
<code>monospace</code>	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

Overview

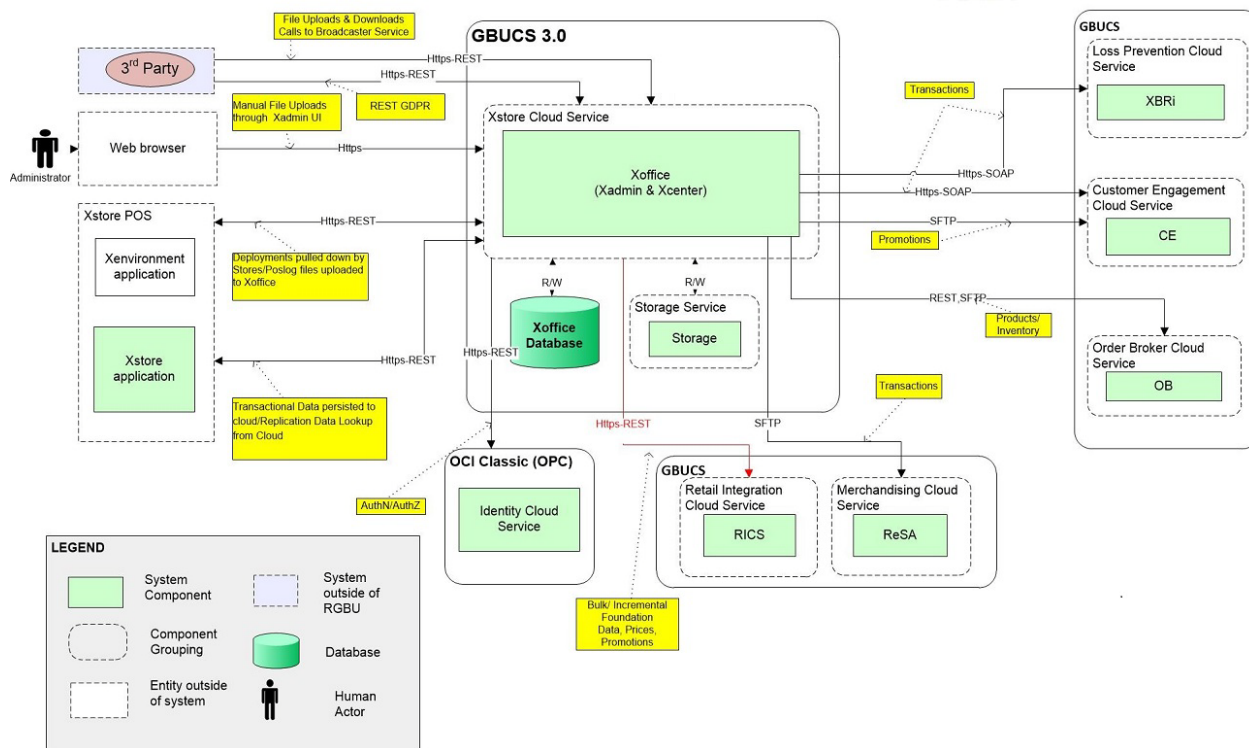
This chapter provides a product and cloud deployment overview of Xstore Office Cloud Service.

Product Overview

Oracle Retail Xstore Office Cloud Service is a web-based application used to administer corporate based functions such as Oracle Retail Xstore Point-of-Service configuration setup and maintenance, file management for the Oracle Retail Xstore Suite, viewing the electronic journal, viewing store reports, monitoring Oracle Retail Xstore Point-of-Service versions in use at the store and register levels, and monitoring alerts.

Xstore Office Cloud Service consists of a User Interface component called Xadmin and a Web Services component called Xcenter, a Java and JSON-based messaging framework.

Xstore Office Cloud Service integrates with several other products as shown in the following Architecture Model. All incoming web services are RESTful and secured with OAuth 2.0. Outgoing web services are RESTful or SOAP based and secured with OAuth, Basic Auth or Custom Auth.

Figure 1–1 Architecture Model

Identity Cloud Service

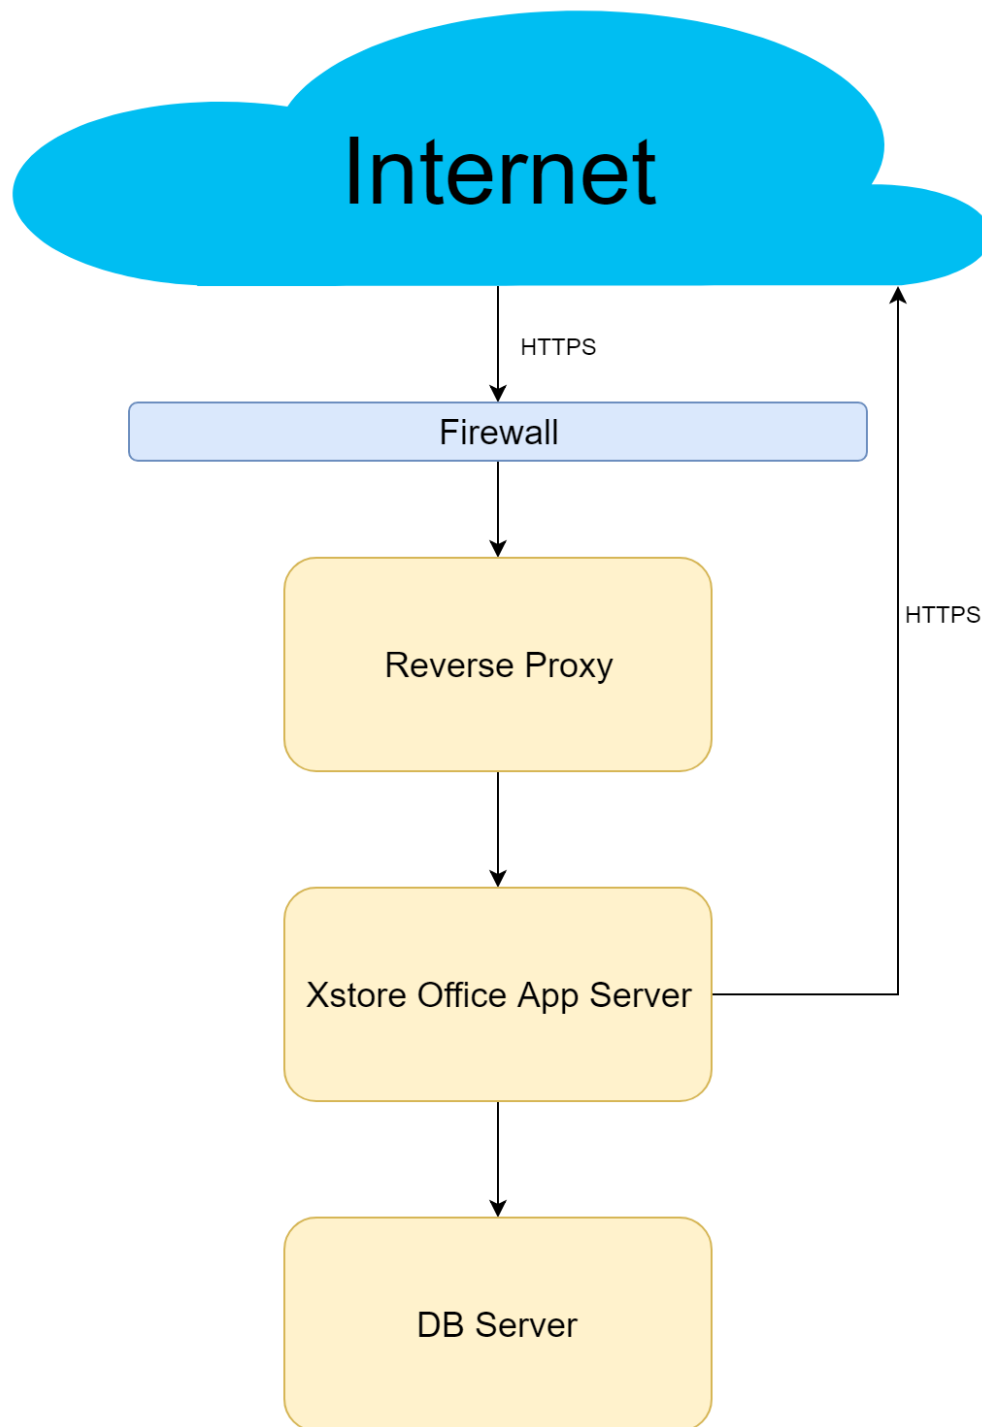
The Identity Cloud Service (IDCS) is an Identity Management Service and Authorization Server and has a host of other features and capabilities. For more information on IDCS, see the Oracle Identity Cloud Service documentation set, Get Started portal for IDCS.

<https://docs.oracle.com/en/cloud/paas/identity-cloud/index.html>

Xstore Office Cloud Service integrates with Identity Cloud Service (IDCS). For Xstore Office Cloud, IDCS is primarily used for Identity Management (that is, storing user information), for securing REST services using the Open Authorization (OAuth) 2.0 and Login via the OAuth 2.0 and OpenID Connect (OIDC) protocols.

Cloud Deployment Overview

The following diagram describes an Xstore Office Cloud deployment.

Figure 1–2 Xstore Office Cloud Deployment Process

All incoming and outgoing service communication with the Cloud instance requires TLS for transport security.

Reverse Proxy: The Reverse Proxy intercepts all incoming requests to Xstore Office Cloud and authorizes and/or authenticates the requests based on the Xstore Office Cloud Web Tier Policy defined in IDCS.

Xstore Office Application Server: The Application Server hosts the Xstore Office Cloud Service Applications including Xadmin which is the User Interface component and Xcenter which is the Web Services component (a Java and JSON-based messaging framework).

DB Server: The Oracle database server contains the database schemas required by the Xstore Office Cloud Service.

Security Features

This chapter describes the available security features of the Xstore Office Cloud Service.

Security Model

Xstore Office Cloud Service integrates with Identity Cloud Service (IDCS) for Identity Management (that is, storing user information), for securing REST services using the Open Authorization (OAuth) 2.0 and Secure User Authentication via the OAuth 2.0 and OpenID Connect (OIDC) protocols.

A Reverse Proxy is in place that intercepts all incoming requests to Xstore Office Cloud Service and authorizes and/or authenticates the requests based on the Xstore Office Cloud Web Tier Policy defined in IDCS.

Xstore Office Cloud Service Provisioning

During Xstore Office Provisioning, Xstore Office OAuth Clients (or Apps) are created in IDCS with custom AppRoles. The Custom AppRoles are used to perform additional Application Level authorizations in addition to Application Level Privilege authorizations.

At the time of provisioning, a Customer Administration User is also created, who initially, is the sole user with access to the Xstore Office Cloud Service application. It is the responsibility of the Customer Administration User to create users with the appropriate privileges for functionality that will become available to them. It is recommended that users are granted the least level of access they require to perform their duties.

Authentication

Xadmin delegates the login to IDCS. Therefore, it does not prompt the user to login and does not store any user credentials. Instead, when a user accesses Xadmin, the Reverse Proxy determines whether this user's session already exists in IDCS. If so, it forwards to Xadmin. If this user's session does not exist, then the Reverse Proxy redirects to IDCS prompting the user to enter their credentials. If the user successfully authenticates in IDCS, then the request is forwarded to Xadmin. Once at Xadmin, additional application level authorization is performed to determine the user's role and privileges granted to the user in order to display the appropriate features that the user is authorized to access.

For details on how users are created and provisioned, see the [Creation of Users](#) section.

Multi-Factor Authentication (MFA)

IDCS provides the ability to enable Multi-Factor Authentication. For more information on enabling Multi-Factor Authentication, see the *Oracle Cloud Administering Oracle Identity Cloud Service Guide*.

Access Control

Xcenter REST APIs are secured with OAuth 2.0 protocols and use OAuth tokens. When Xcenter REST Services are invoked, the Reverse Proxy intercepts the requests, uses the OAuth 2.0 protocol to authorize the OAuth tokens and forwards the request to Xcenter. Xcenter then examines the tokens and performs additional application level authorization by examining the tokens to see if they were requested by an OAuth Client that was granted specific AppRoles defined in IDCS when Xstore Office OAuth Clients were provisioned. If the token contains the necessary AppRole Grants, Xcenter provides access to the endpoint and the appropriate response is returned.

For details on how users are created and provisioned, see the [Creation of Users](#) section.

Security Audit

User Identity (account name or IP address) is recorded in the application logs when accessing Xadmin or invoking Xcenter REST APIs. In addition, date, time, information, software or configuration changes are also recorded in the application logs.

IDCS provides several reports that are detailed in the *Oracle Cloud Administering Oracle Identity Cloud Service Guide*.

Credential Rotation

All credentials in use within the Xstore Office Cloud Service will be rotated on a regular schedule.

Security Considerations for Developers

This chapter describes the security considerations for developers.

Creation of Users

A Customer Administration User will be created as part of the Xstore Office Cloud Service provisioning process. Before end users can access the Xstore Office Cloud Service application it is necessary to create and provision users. This includes provisioning access to the system, assigning organizations, a role and org nodes to each user to control what functionality will be available to them. This will need to be done by the Customer Administration User.

IDCS

Note: While users can be created using the IDCS UI, it is important to note that they must still be provisioned through the Xadmin UI. This includes provisioning access to the system, assigning organizations, a role and org nodes to each user to control what functionality will be available to them.

Manual Creation

Users can be created manually (that is one at a time) in IDCS by following the instructions on how to create user accounts in the *Oracle Cloud Administering Oracle Identity Cloud Service Guide*.

Bulk Import

Users can be bulk imported into IDCS by following the instructions on how to import user accounts in the *Oracle Cloud Administering Oracle Identity Cloud Service Guide*.

REST APIs

Users can also be imported (either individually or in bulk) into IDCS by invoking IDCS REST APIs. For more information about the REST APIs, see the *Oracle Cloud REST API for Oracle Identity Cloud Service Guide*. This requires the creation of an OAuth Client in order to be able to obtain an OAuth Token to be able to invoke the REST APIs. For more information about creating OAuth Clients, refer to the [Creation of the Setup OAuth Client in IDCS](#) section.

User Access AppRole

When a user is created using IDCS (either manually or via bulk import, or via REST APIs), it is the Customer Admin's responsibility to grant the User the *User Access* AppRole. This can be done in the IDCS UI as follows:

- Click on the Xstore Office App.
- Click on the Application Roles tab.
- Select the menu icon on the far right of the User Access AppRole.
- Select **Assign Users** and select the Users in the popup to be granted this AppRole.

Xadmin

Refer to the *Oracle Retail Xstore Office/Xstore Office Cloud Service User Guide* for details on how to provision users via the Xadmin User Management UI.

Xoffice OAuth Client AppRoles

AppRoles have been created in Xoffice OAuth Clients in order to perform additional App Level Authorization.

User Access

Typically, the IDCS tenant will represent several applications which are independent of each other. The *User Access* AppRole has been created in the Xstore Office App (which typically has a display name of either RGBU_XTROFFCS_PRD_XOFFICE or RGBU_XTROFFCS_UAT_XOFFICE depending on the environment). The *User Access* AppRole is used to link IDCS users with the Xstore Office Cloud Service Application.

When Xadmin performs a user sync against IDCS, it will do the sync based on the users that have been granted this *User Access* AppRole. Refer to the *Oracle Retail Xstore Office/Xstore Office Cloud Service User Guide* for details on the user sync between Xadmin and IDCS.

When a user is created using the IDCS UI (either manually or via Bulk Import), it is the Customer Admin's responsibility to grant the user the *User Access* AppRole. This can be done as follows:

- Click on the Xstore Office App.
- Click on the Application Roles tab.
- Select the menu icon on the far right of the User Access AppRole.
- Select **Assign Users** and select the Users in the popup to be granted this AppRole.

Xstore Access

The *Xstore Access* AppRole is used for additional App Level Authorization. This authorization is done when Xstore Office REST APIs are invoked. Therefore, if the Xstore Office REST APIs are to be invoked, then they must be done by using an OAuth Client (App) that has been granted the *Xstore Access* AppRole. For instance, refer to the [Xstore Office Setup App](#) in the [Creation of the Setup OAuth Client in IDCS](#) section.

Data Privacy Access

The *Data Privacy Access* AppRole is used for additional App Level Authorization. This authorization is done when the Data Privacy REST APIs are invoked. Therefore, if the Data Privacy REST APIs are to be invoked, they must be done by using an OAuth Client (App) that has been granted the *Data Privacy Access* AppRole. Refer to the [Creation of the Setup OAuth Client in IDCS](#) section.

Service Access

The *Service Access* AppRole is used for internal manipulation of the OAuth Clients. This is also needed in case OAuth Clients need to be deleted.

Cloud Enrollment of Xstore Clients

Any Xstore register (desktop, thin client, tablet, or mobile) or other client (like Xenvironment or Xservices) that communicates with Xstore Office Cloud Service must first be enrolled in IDCS via Xstore Office Cloud Service. This can be done either via Xadmin or Xenvironment. The sections below contain information about the steps to be followed for Cloud Enrollment of Xstore Clients.

Xadmin

Xstore Stores can be enrolled in Xstore Office Cloud Service via Xadmin On-Premise, if the retailer has an existing Xadmin On-Premise application 18.0.1 or higher. Refer to the on-premise *Oracle Retail Xstore Office User Guide* for these steps.

Xenvironment

Xstore stores can be enrolled in the Xstore Office Cloud Service via Xenvironment by following these steps.

Note: Collect the following data prior to starting the Cloud Enroll process via Xenvironment.

1. Xstore Office Cloud Service hostname and port. The Customer Administrator can look this up by logging into their Cloud Service Account.
 2. IDCS User credentials: Username and password of any IDCS user belonging to the provisioned IDCS tenant.
-
-

1. Once the Xenvironment installation is complete, open a web browser on the same system where Xenvironment is installed, that is on the lead register. The enrollment process only works when performed on the lead register. Go to the following URL: `https://<lead_register_hostname>:9096/cloudenroll`.
2. Log in as the user that runs Xstore Point of Service.
3. In the form that is presented, enter the Xcenter Application Server Settings for Xstore Office Cloud.
 - a. Host: Xstore Office Cloud Hostname
 - b. Port: Xstore Office Cloud Port
 - c. Provisioning ID: Customer's Provisioning ID
 - d. Username: Username of an IDCS user (This is typically an email address)

- e. Password: Password of an IDCS user
- 4. Click **Enroll Location**. This will validate the user credentials and enroll the location.
- 5. Once the enrollment is complete the systems will be restarted. When the registers start up again they will be configured for Xstore Office Cloud Service.
- 6. At Store close all the registers, Xenvironment, and Xservices will be enabled with Xstore Office Cloud Service configurations and all systems will be restarted.

Creation of the Setup OAuth Client in IDCS

OAuth Clients (also called Apps) are required in order to invoke REST Services exposed by Xstore Office.

A new REST API has been exposed for creating an OAuth Client to be able to perform initial setup of the Xstore Office Cloud Service.

Note: While OAuth Clients can be created via the IDCS User Interface, the resulting OAuth Clients do not have all the needed properties in order to be able to function accurately. Instead, follow the steps detailed below in order to create the OAuth Clients using the IDCS REST APIs.

Prerequisites

- It is very helpful to understand tools and terminologies such as Basic Auth, OAuth, curl, json and their usage.
- For example, knowing that OAuth uses Bearer Tokens in the HTTP Authorization Header whereas Basic Auth uses Base 64 encoded credentials will help you understand the commands below.
- Authorization Header for an OAuth Token would look like this: "Authorization: Bearer <token>"
- Authorization Header for a Basic Auth Token would look like this: "Authorization: Basic <Base64_encode(client_id:client_secret)>"

-
-
- Note:**
1. OAuth Clients are also called Apps. These terms are used interchangeably.
 2. Be sure to use the correct App Client IDs and Client Secrets based on the environment. These steps will have to be repeated for each environment. Using the artifacts from one environment in another environment can lead to unexpected results.
-
-

Required Data

Collect the following data prior to creation of the setup OAuth Client.

1. IDCS_TENANT_HOST: The Customer Administrator can look this up by logging into their Cloud Service Account.
2. IDCS User credentials: Username and Password of an IDCS user belonging to the provisioned IDCS tenant who is either an *Identity Domain Administrator* or an *Application Administrator*, or both. An IDCS user who is neither an *Identity Domain*

Administrator nor an *Application Administrator* will not be authorized to invoke this API.

Tools

The following steps are executed using curl. However, any similar tool such as SoapUI or Postman can be used.

Xstore Office Setup App

Before the newly provisioned Xstore Office Cloud Service can be used, some initial setup is required. For instance, the Xstore Office database needs Tax Location data to be present in order to be able to setup new stores or organization hierarchy via the Xadmin UI. This can be achieved by using the Xcenter auto deployment functionality via REST services. In order to utilize the Xcenter REST services, an OAuth Client is required. This client can also be used to insert any other seed Xstore Office data that needs to be present in the database besides the Tax Location data.

This Xstore Office Setup OAuth Client can be created by invoking the Enroll Client API as described below.

-
-
- Note:**
1. This OAuth Client can also be used to invoke RTLog Generator REST APIs.
 2. This OAuth Client credentials can also be used to configure the Data Migration Utility.
 3. This OAuth Client can also be used to invoke Data Privacy APIs.
 4. This OAuth Client can also be used for any additional recurring customer operations where Xcenter REST Services need to be invoked.
-
-

-
-
- Note:**
1. The intent of this API is to create an OAuth Client for the setup of Xstore Office Cloud Service, primarily for Data Migration purposes, uploading "seed" data and for invoking the Data Privacy API. It is not intended to be used for integration with other systems.
 2. On rerunning this API, the OAuth Client will be recreated with a new secret. Therefore, any clients or systems using these credentials will need to have their secrets updated (with the intent being that this should only be used for setup purposes and not for integration purposes).
-
-

1. Request creation of the Setup OAuth Client. The response will contain the client id, client secret of the OAuth Client as well as the IDCS_TENANT_HOST (which is already known to the Customer Admin).

Replace the <IDCS_username> and <IDCS_password> with those of an IDCS user who is either an Identity Domain Administrator or an Application Administrator or both.

```
curl -i -H "Authorization: Basic <Base64_encode(<IDCS_username>:<IDCS_password>)>" "https://<XSTORE_OFFICE_HOST>/xcenter/rest/{provisioning.id}/v1/enrollclient?type=setup"
```

2. Request an Access token using the Setup OAuth Client credentials (from the previous step).

Replace the <client_id> and <client_secret> with those of the Setup OAuth Client (App).

```
curl -i -H "Authorization: Basic <Base64_encode(<client_id>:<client_secret>)>" -H "Content-Type: application/x-www-form-urlencoded; charset=UTF-8" https://<IDCS_TENANT_HOST>/oauth2/v1/token -d "grant_type=client_credentials&scope=urn:opc:idm:__myscopes__"
```

3. This token can now be used to invoke Xoffice REST APIs in order to configure Xstore Office Cloud Service.
4. RTLog Generator REST APIs:
 - a. The credentials (Client Id and Client Secret) of the Setup OAuth Client (App) can be similarly used to obtain a token in order to invoke RTLog Generator REST APIs.
5. Data Migration Utility:
 - a. The credentials (Client Id and Client Secret) of the Setup OAuth Client (App) can be used when configuring the Data Migration Utility (to update `idp.properties`) in order to migrate data from an existing Xstore Office to Xstore Office Cloud Service.
6. Data Privacy API:
 - a. The credentials (Client Id and Client Secret) of the Setup OAuth Client (App) in conjunction with an IDCS user's `userid/password` can be used in order to request an Access token to invoke the Data Privacy REST API.

Replace the `<client_id>` and `<client_secret>` with those of the Data Privacy OAuth Client (App).

Replace the `<IDCS_username>` and `<IDCS_password>` with those of an IDCS user.

```
curl -i -H "Authorization: Basic <Base64_encode(<client_id>:<client_secret>)>" -H "Content-Type: application/x-www-form-urlencoded; charset=UTF-8" https://<IDCS_TENANT_HOST>/oauth2/v1/token -d "grant_type=password&username=<IDCS_username>&password=<IDCS_password>&scope=urn:opc:idm:__myscopes__"
```

- b. Invoke the Data Privacy endpoint (example – replace with appropriate data).

Replace `<token>` with the token from the previous step.

```
curl -i -H "Authorization: Bearer <token>" "https://<XSTORE_OFFICE_HOST>/xcenter/rest/privatedata/1000::100?type=employee"
```