

Deploying Oracle FLEXCUBE Investor Servicing Application  
on WebLogic

Oracle FLEXCUBE Investor Servicing

Release 14.1.0.0.0

[May] [2019]



---

# Table of Contents

- 1. DEPLOYING ORACLE FLEXCUBE INVESTOR SERVICING ON WEBLOGIC..... 1-1
  - 1.1 INTRODUCTION ..... 1-1
  - 1.2 BUILDING APPLICATION ..... 1-1
  - 1.3 DEPLOYING APPLICATION IN ORACLE WEBLOGIC ..... 1-1
    - 1.3.1 *Deploying Dependency Library “Jersey-bundle”* ..... 1-1
    - 1.3.2 *Deploying Application from WebLogic Administration Console*..... 1-7

---

# 1. Deploying Oracle FLEXCUBE Investor Servicing on WebLogic

## 1.1 Introduction

This chapter explains the steps to deploy Oracle FCIS application into Oracle WebLogic application server.

## 1.2 Building Application

Refer to the chapter 'Building Application'. This includes the following details:

- Creating Property File
- Building Centralized EAR File
- Configuring Plug-ins
- Loading Properties File

## 1.3 Deploying Application in Oracle WebLogic


This section explains the method of deploying Oracle FLEXCUBE Investor Servicing Application Oracle WebLogic application server. Before deployment, all the resources mentioned in the document "Resources To be Created" have to be created.

### 1.3.1 Deploying Dependency Library "Jersey-bundle"

This library must be installed before deploying FCISApp.ear. Follow the below steps


1. Start the Administrative Console of WebLogic application server. You can start this by entering Oracle WebLogic Admin Console URL in the address bar in an internet browser.  
Eg: <http://10.10.10.10:1001/console>

The following screen is displayed:

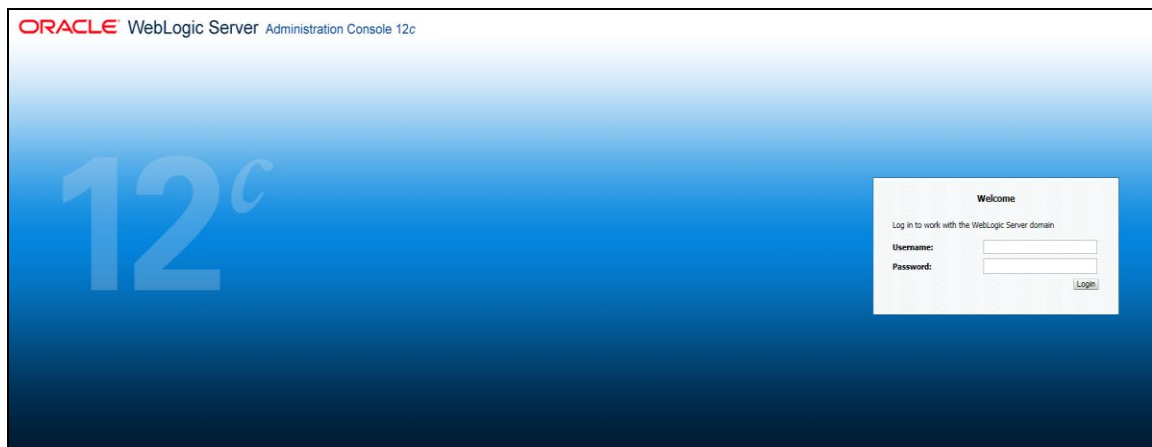


2. Specify the WebLogic administrator user name and password. Click 'Log In'.


The following screen is displayed:

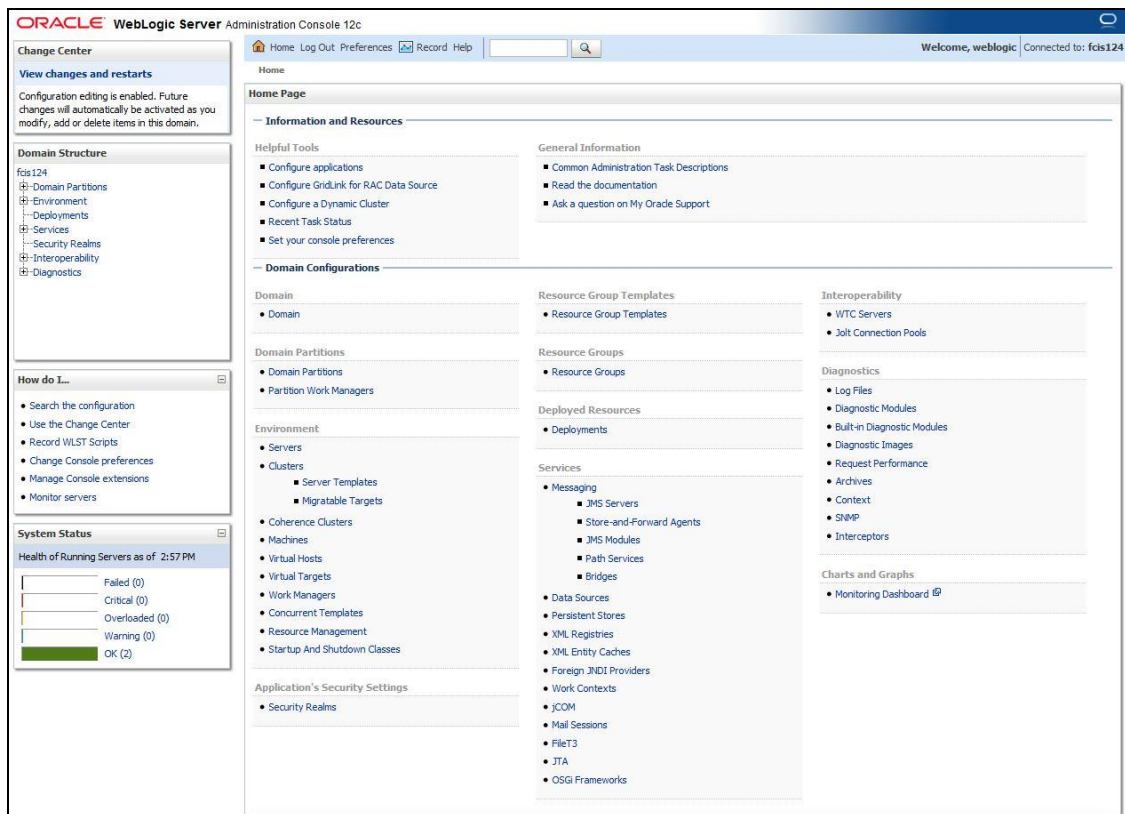


Click 'Deployments' button on the left hand side of the 'Weblogic Server' screen. The following screen is displayed:

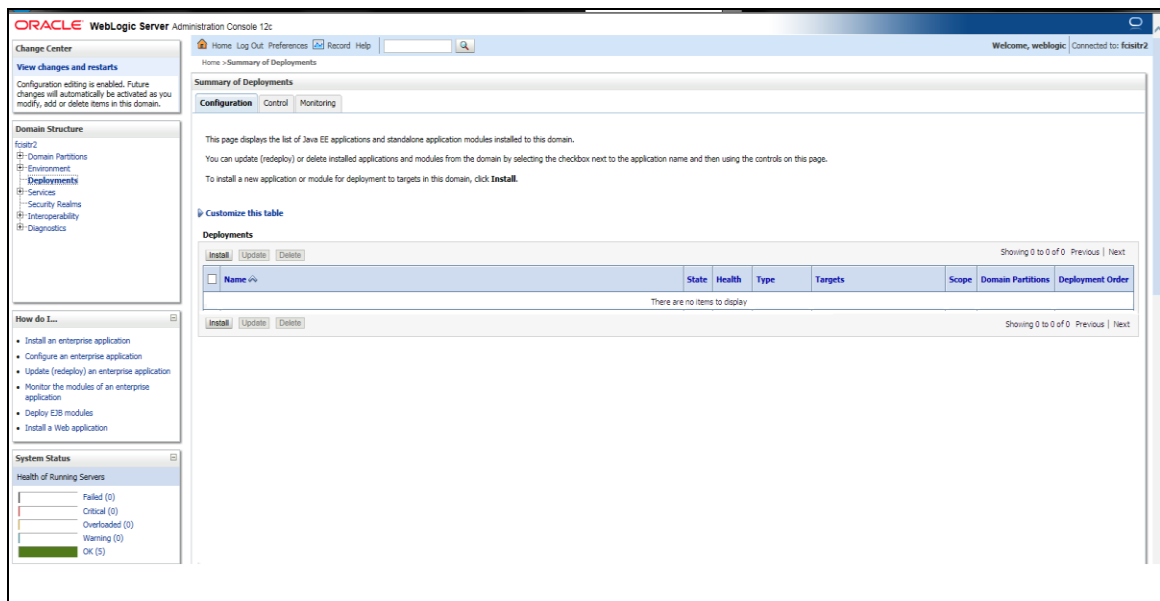


3. Click install button. The following screen will be displayed.

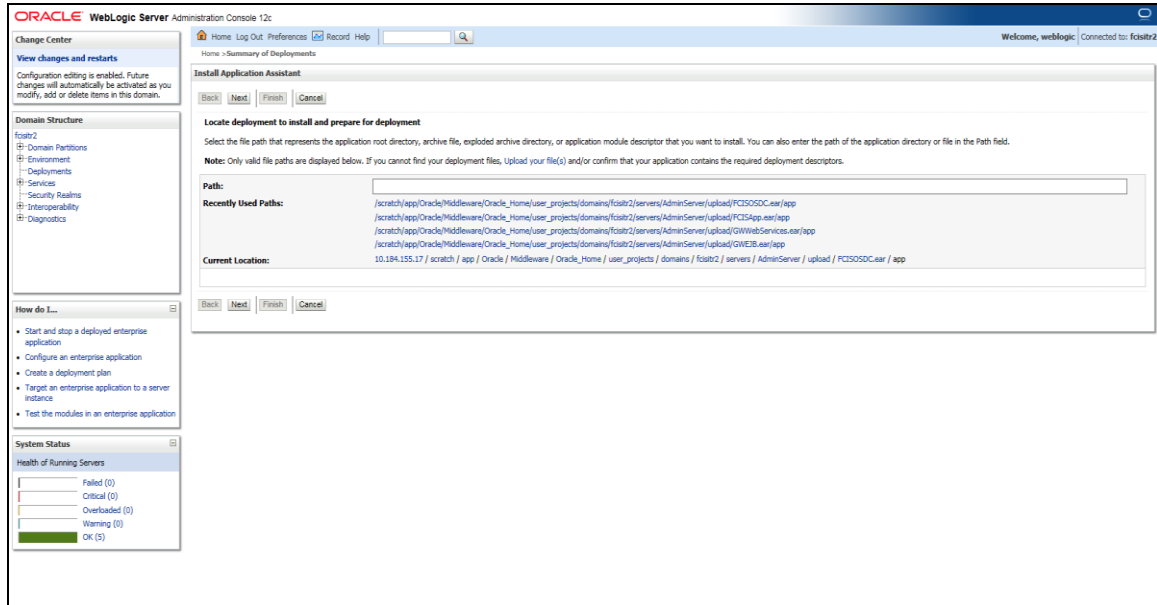


4. In order to specify the path/location of the library file, click the link 'upload your file(s)'.

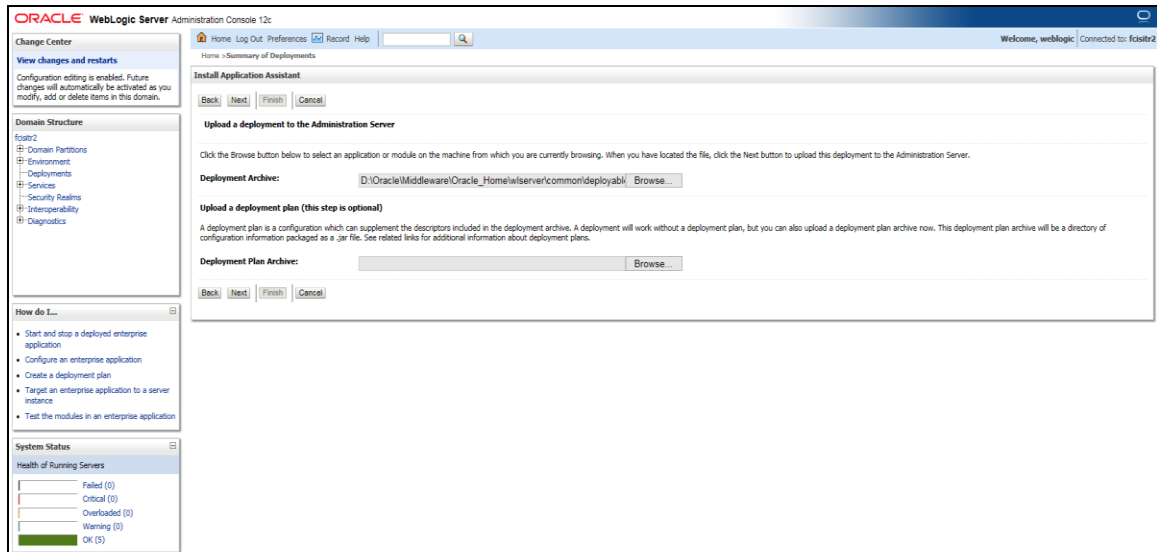


5. Click Browse in Deployment Archive and select jersey bundle under the path “*wlserver\common\deployable-libraries\jersey-bundle-x.x.war*” and click next.

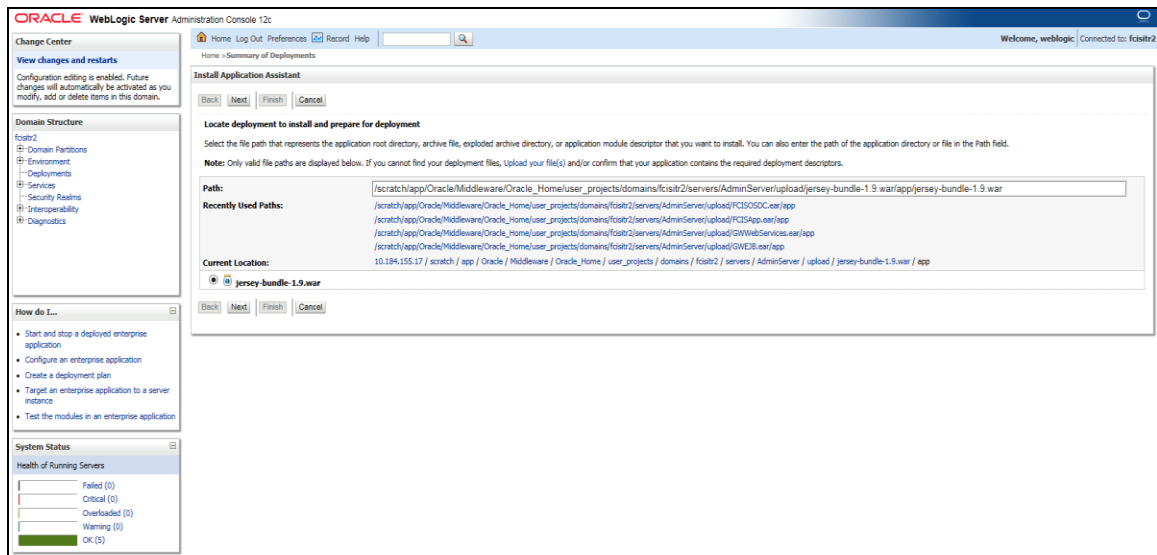

6. Click Next and the following screen will be displayed.

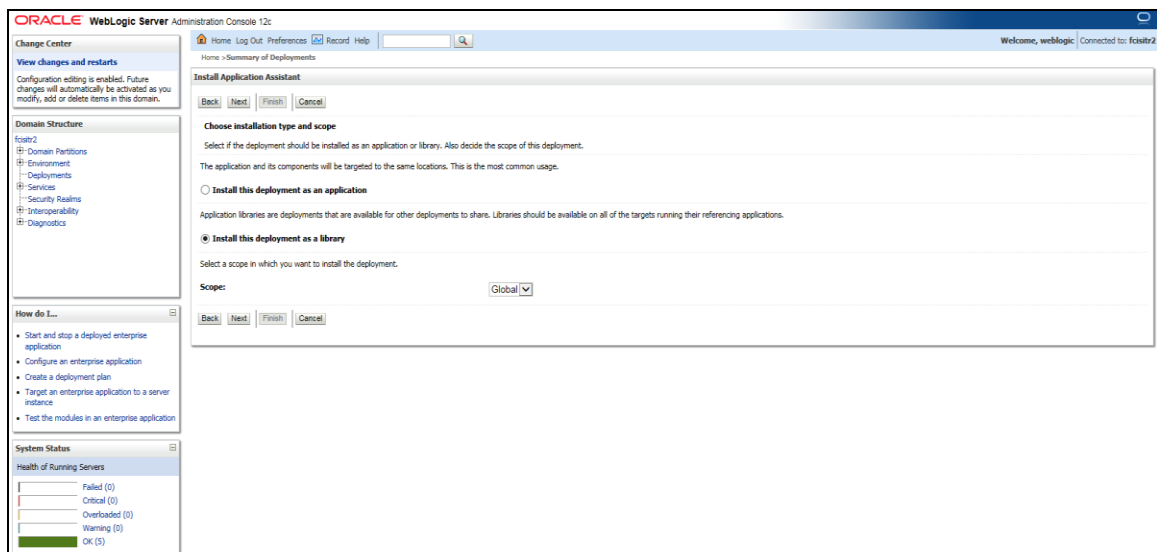


7. Select “install this deployment as library” and click next.

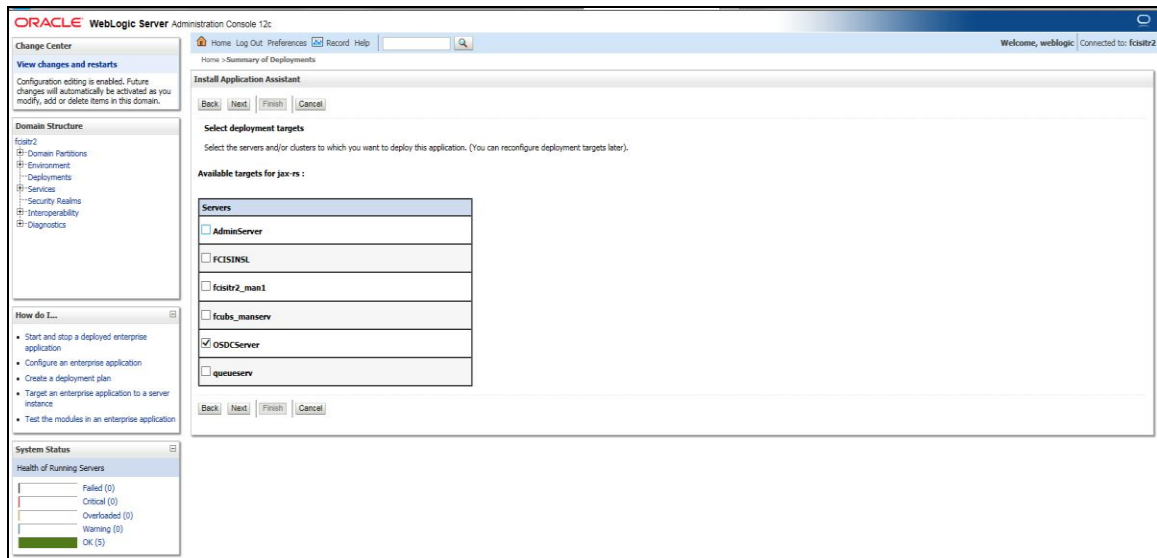


8. Select the target of the application. You can choose the server 'AdminServer' or 'Managed Server(s)'.


Click of 'Next' the following screen will be displayed.

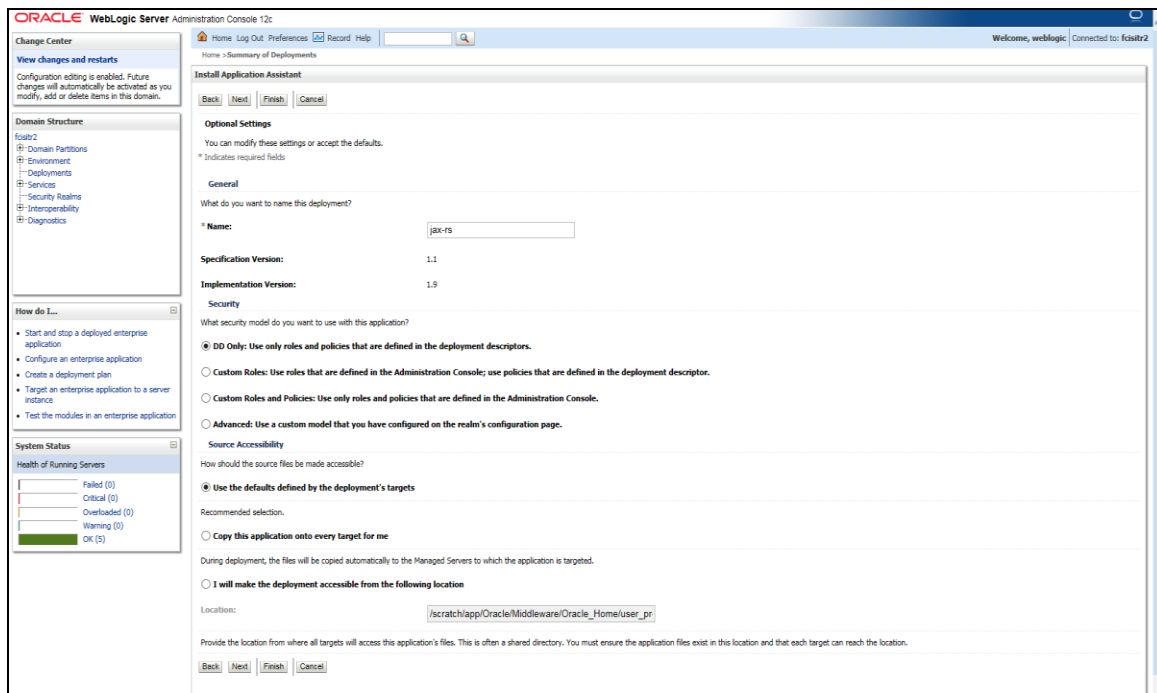

## 9. Click Next

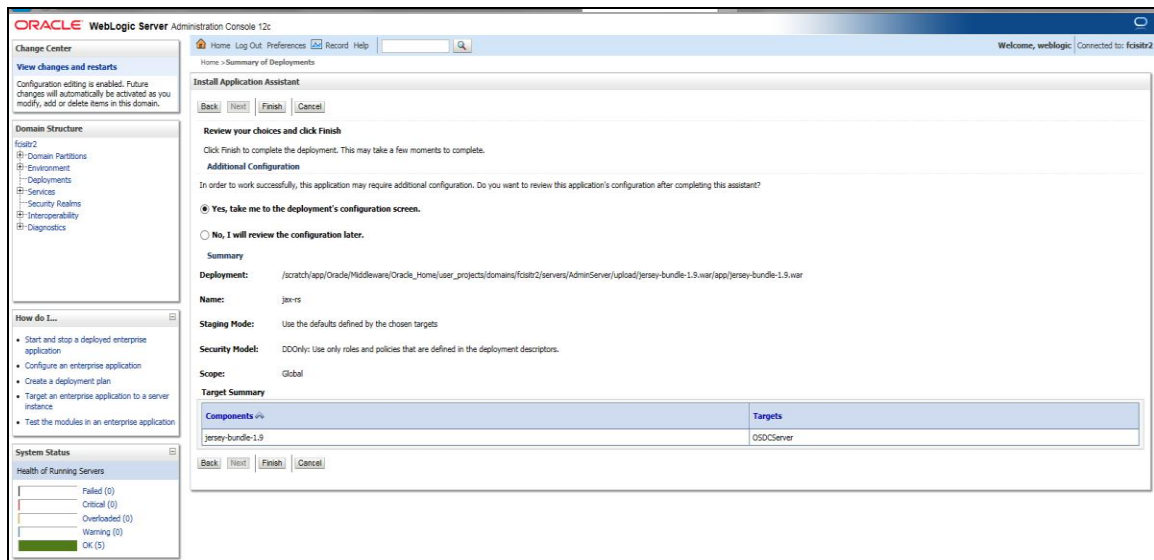

## 10. Click Finish button

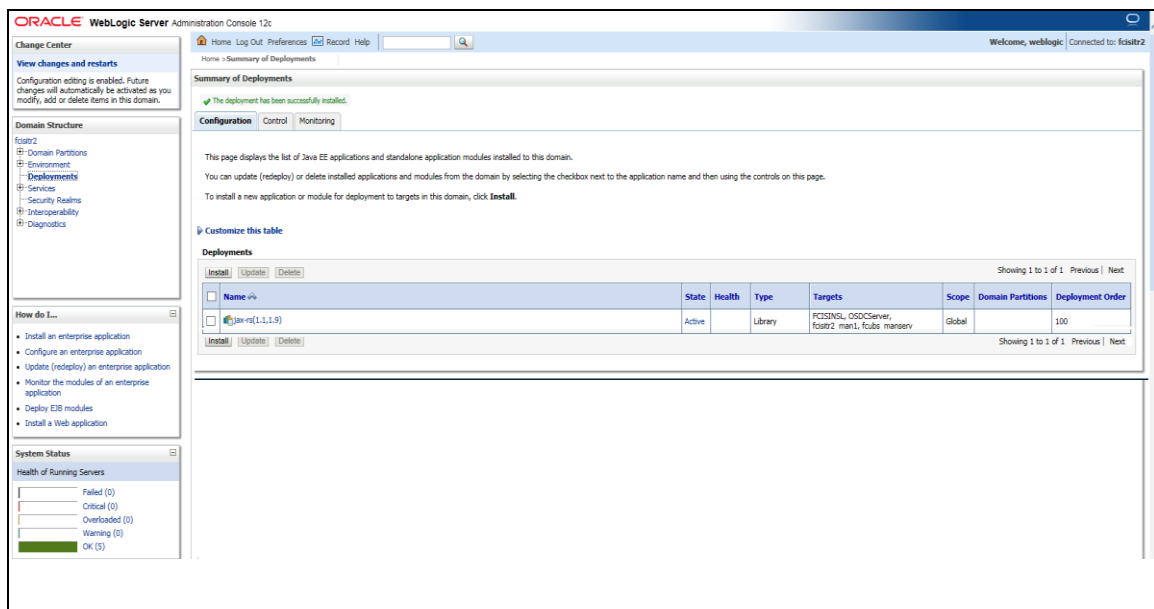

This library must appear in the deployment with Type column as "Library".




### 1.3.2 Deploying Application from WebLogic Administration Console

To deploy Oracle FLEXCUBE Investor Servicing Application from Oracle WebLogic administration console, follow the steps given below.


1. Start the Administrative Console of WebLogic application server. You can start this by entering Oracle WebLogic Admin Console URL in the address bar in an internet browser.  
Eg: <http://10.10.10.10:1001/console>

The following screen is displayed:

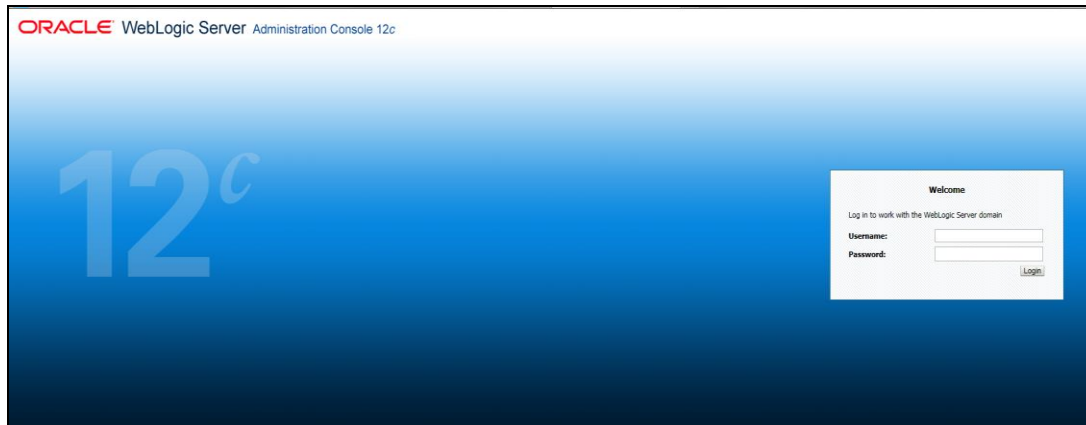


2. Specify the WebLogic administrator user name and password. Click 'Log In'.

The following screen is displayed:

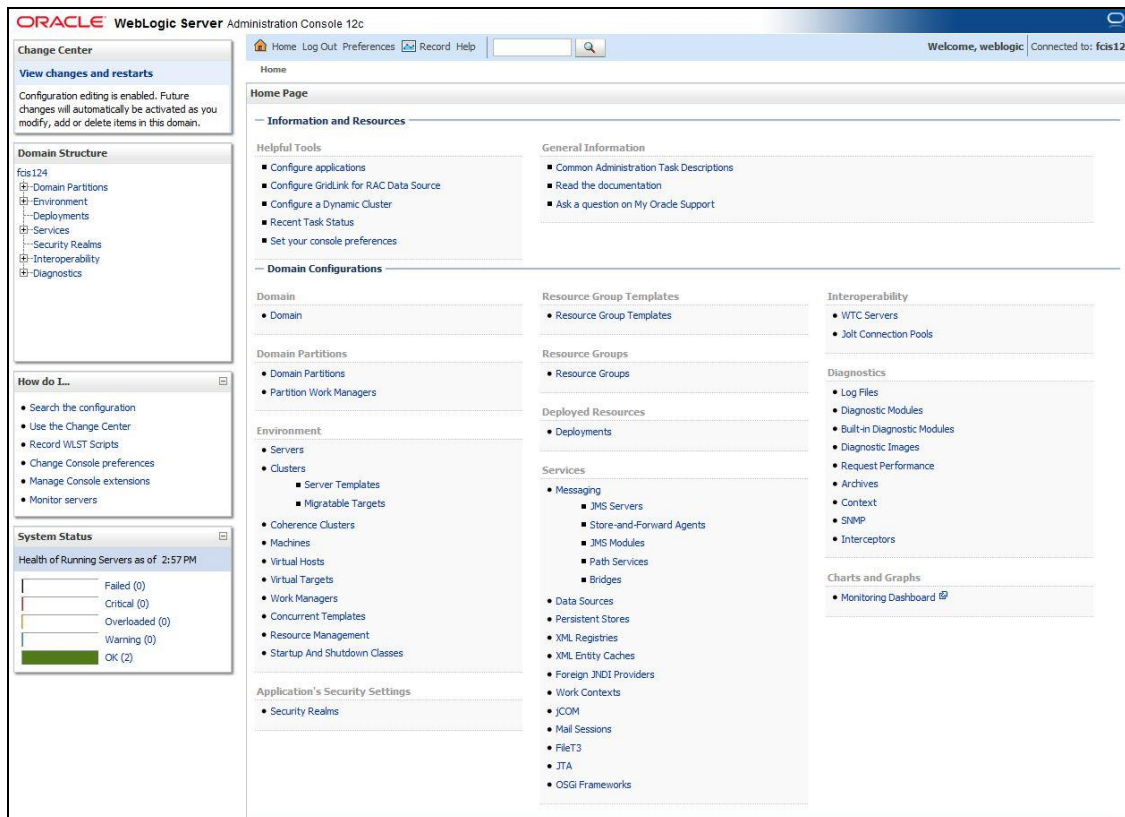


Click 'Deployments' button on the left hand side of the 'Weblogic Server' screen. The following screen is displayed:

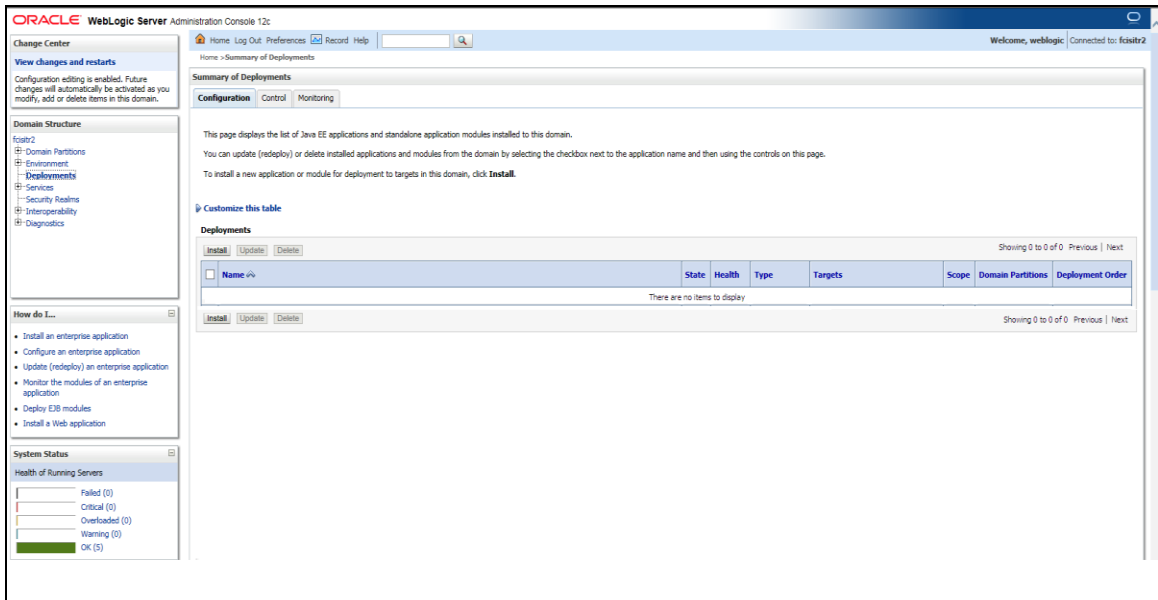


You need to deploy an EAR. For instance, 'FCISApp.ear'. Go to 'Deployment'.


3. Click 'Install' button. The following screen is displayed:

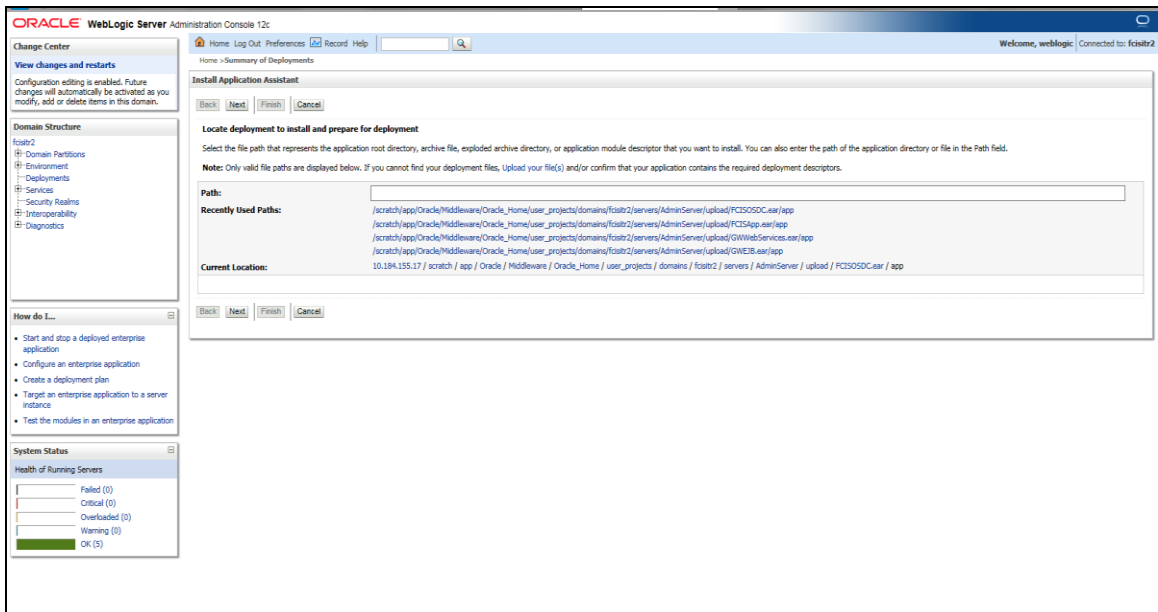

In order to specify the path/location of the enterprise archive file, click the link ‘upload your file(s)’. The following screen is displayed:

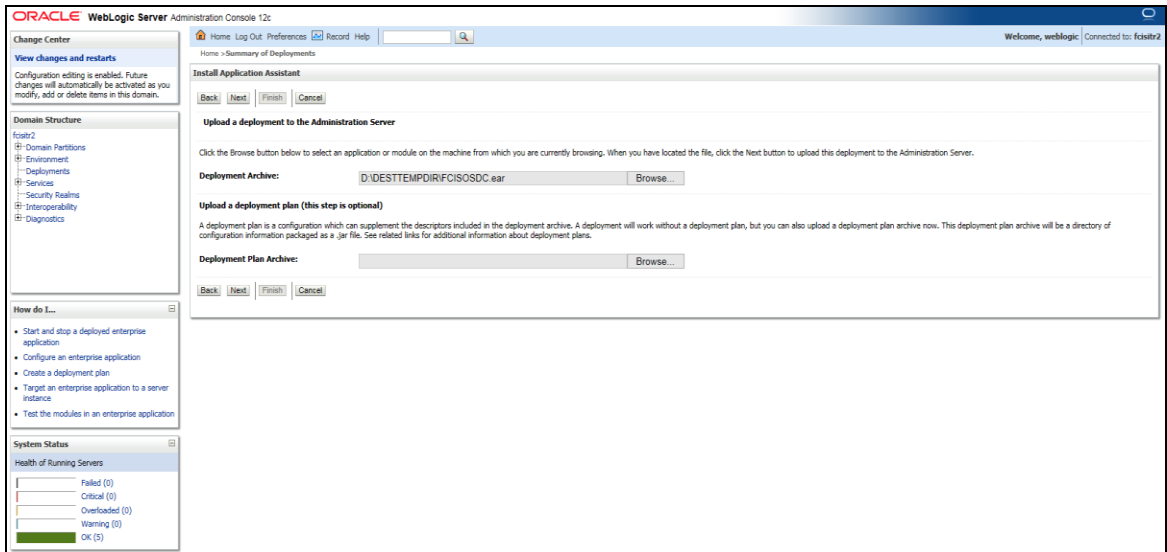


4. Specify the EAR file path. You can use the ‘Browse’ button to locate the file.
5. Click ‘Next’. The following screen is displayed.

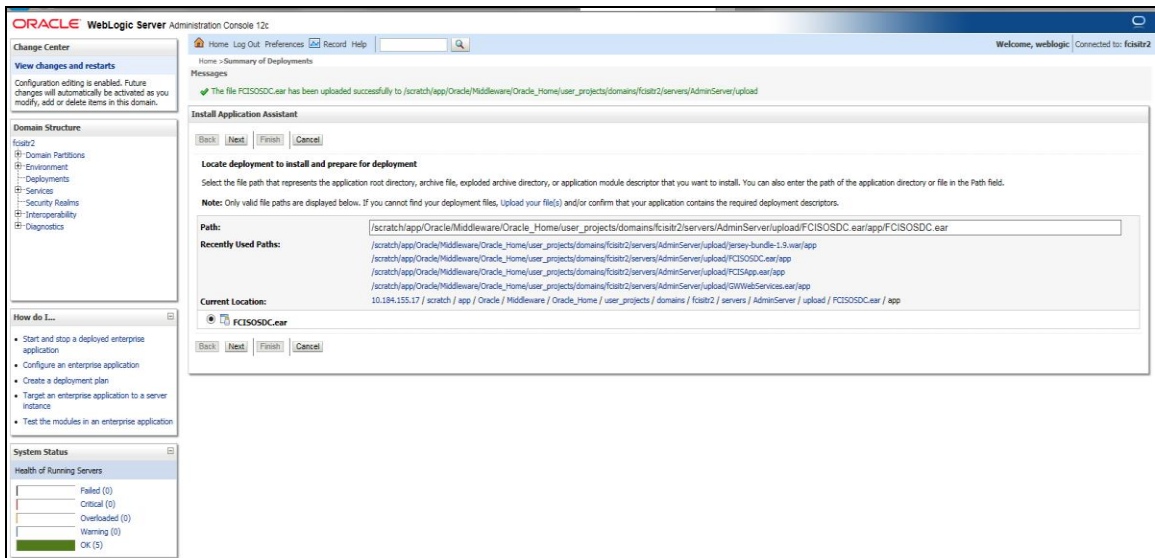


6. Select the application ‘FCISApp.ear’ from the list.

7. Click 'Next'. Following screen is displayed:

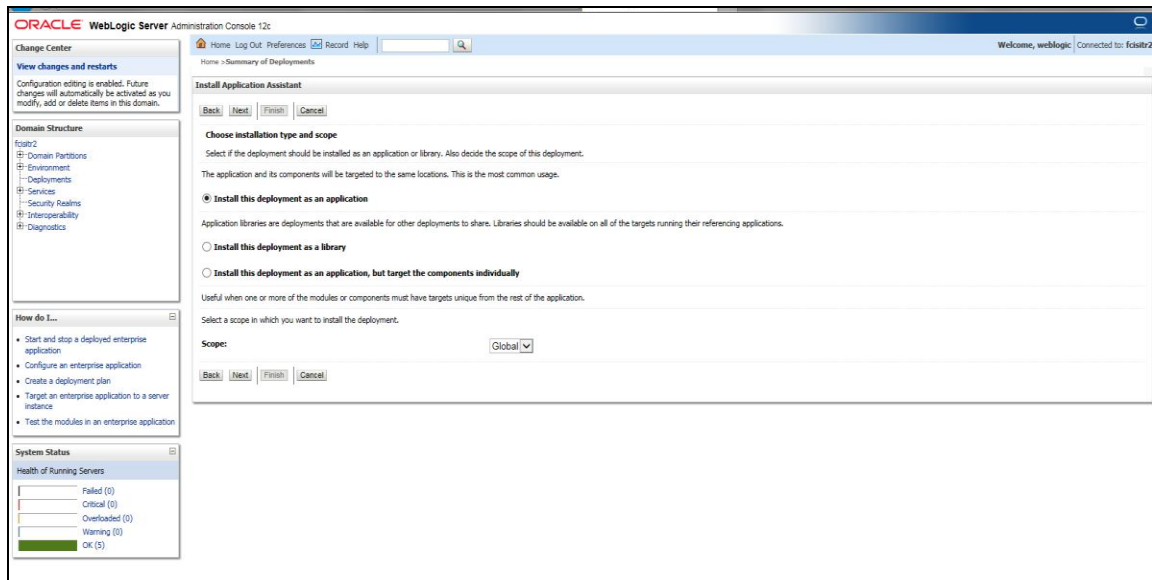

8. Choose the targeting style 'Install this deployment as an application'.

9. Click 'Next'. The following screen is displayed

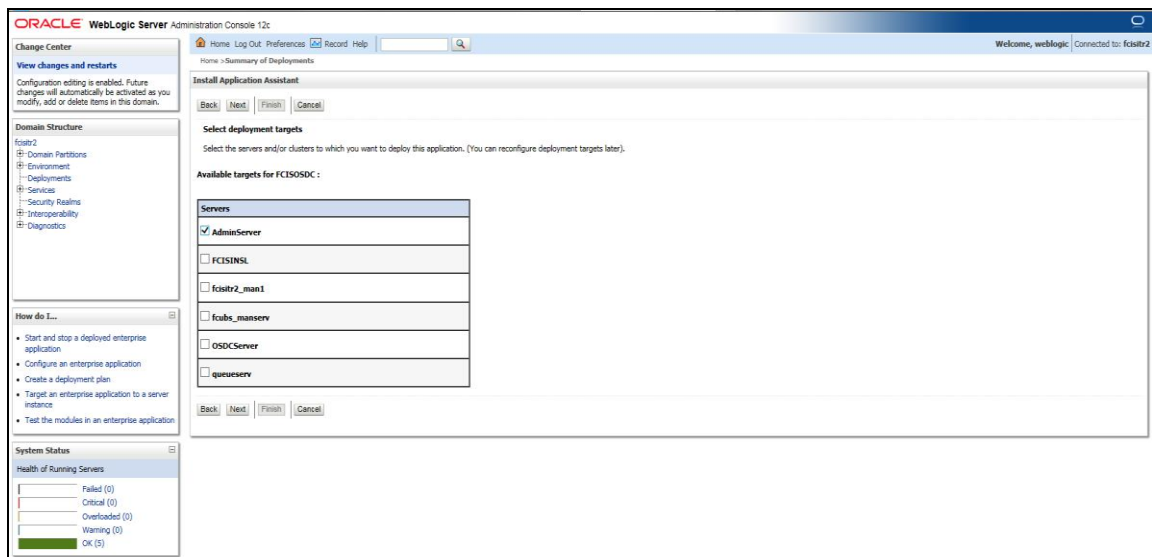

10. Select the target of the application. You can choose the server 'AdminServer' or 'Managed Server(s)'.

11. Click 'Next'. The following screen is displayed.

**ORACLE WebLogic Server Administration Console 12c**

Home Log Out Preferences Record Help

Welcome, weblogic Connected to: fcsitr2

Change Center

View changes and restarts

Configuration editing is enabled. Future changes will automatically be activated as you modify, add or delete items in this domain.

Domain Structure

- Domain Partitions
- Environment
- Deployments
- Services
- Security Realms
- Interoperability
- Diagnostics

How do I...?

- Start and stop a deployed enterprise application
- Configure an enterprise application
- Create a deployment plan
- Target an enterprise application to a server instance
- Test the modules in an enterprise application

System Status

Health of Running Servers

- Failed (0)
- Critical (0)
- Overloaded (0)
- Warning (0)
- OK (3)

**Install Application Assistant**

Back Next Finish Cancel

**Optional Settings**

You can modify these settings or accept the defaults.

\* Indicates required fields

**General**

What do you want to name this deployment?

\* Name: FCSOSDC

Archive Version: 12.3.0.0.0

Deployment Plan Version:

**Security**

What security model do you want to use with this application?

☒ **DO Only: Use only roles and policies that are defined in the deployment descriptors.**

☐ Custom Roles: Use roles that are defined in the Administration Console; use policies that are defined in the deployment descriptor.

☐ Custom Roles and Policies: Use only roles and policies that are defined in the Administration Console.

☐ Advanced: Use a custom model that you have configured on the realm's configuration page.

**Source Accessibility**

How should the source files be made accessible?

☒ **Use the defaults defined by the deployment's targets**

Recommended selection.

☐ Copy this application onto every target for me

During deployment, the files will be copied automatically to the Managed Servers to which the application is targeted.

☐ I will make the deployment accessible from the following location

Location: /scratch/app/Oracle/Middleware/Oracle\_Home/user\_projects

Provide the location from where all targets will access this application's files. This is often a shared directory. You must ensure the application files exist in this location and that each target can reach the location.

**Plan Source Accessibility**

How should the plan source files be made accessible?

☒ **Use the same accessibility as the application**

12. Check whether the deployment location is accessible or not. Click next.

**ORACLE WebLogic Server Administration Console 12c**

Home Log Out Preferences Record Help

Welcome, weblogic Connected to: fcsitr2

Change Center

View changes and restarts

Configuration editing is enabled. Future changes will automatically be activated as you modify, add or delete items in this domain.

Domain Structure

- Domain Partitions
- Environment
- Deployments
- Services
- Security Realms
- Interoperability
- Diagnostics

How do I...?

- Start and stop a deployed enterprise application
- Configure an enterprise application
- Create a deployment plan
- Target an enterprise application to a server instance
- Test the modules in an enterprise application

System Status

Health of Running Servers

- Failed (0)
- Critical (0)
- Overloaded (0)
- Warning (0)
- OK (3)

**Review your choices and click Finish**

Click Finish to complete the deployment. This may take a few moments to complete.

**Additional Configuration**

In order to work successfully, this application may require additional configuration. Do you want to review this application's configuration after completing this assistant?

☒ **Yes, take me to the deployment's configuration screen.**

☐ No, I will review the configuration later.

**Summary**

Deployment: /scratch/app/Oracle/Middleware/Oracle\_Home/user\_projects/domains/fcsitr2/servers/AdminServer/upload/FCSOSDC.ear/app/FCSOSDC.ear

Name: FCSOSDC

Staging Mode: Use the defaults defined by the chosen targets

Plan Staging Mode: Use the same accessibility as the application

Security Model: DOOnly: Use only roles and policies that are defined in the deployment descriptors.


Scope: Global

**Target Summary**

| Components  | Targets     |
|-------------|-------------|
| FCSOSDC.ear | AdminServer |

Back Next Finish Cancel


Click 'Finish' button. The following screen is displayed.

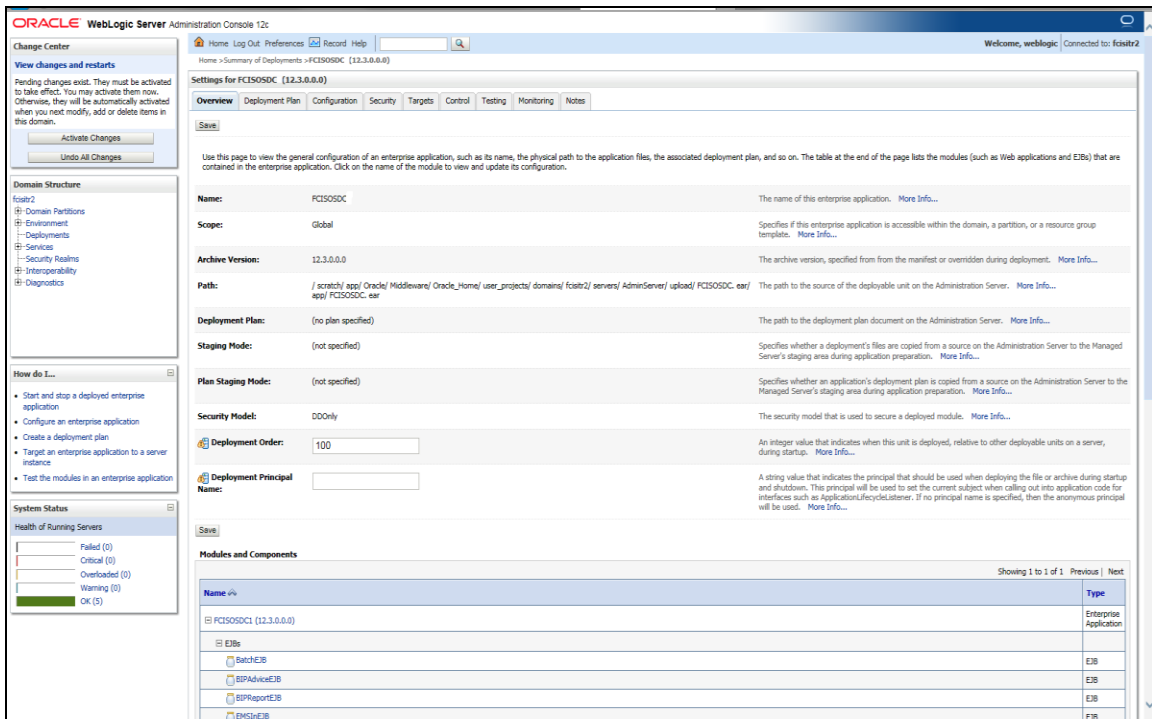

13. Change **Deployment Order** to **400** if the application includes **BPEL plug-in**.

14. Click 'Save' button. The message 'Settings updated successfully' is displayed.

Click 'Activate Changes' button on the left pane. The message 'All the changes have been activated. No restarts are necessary' is displayed. The screen is given below:

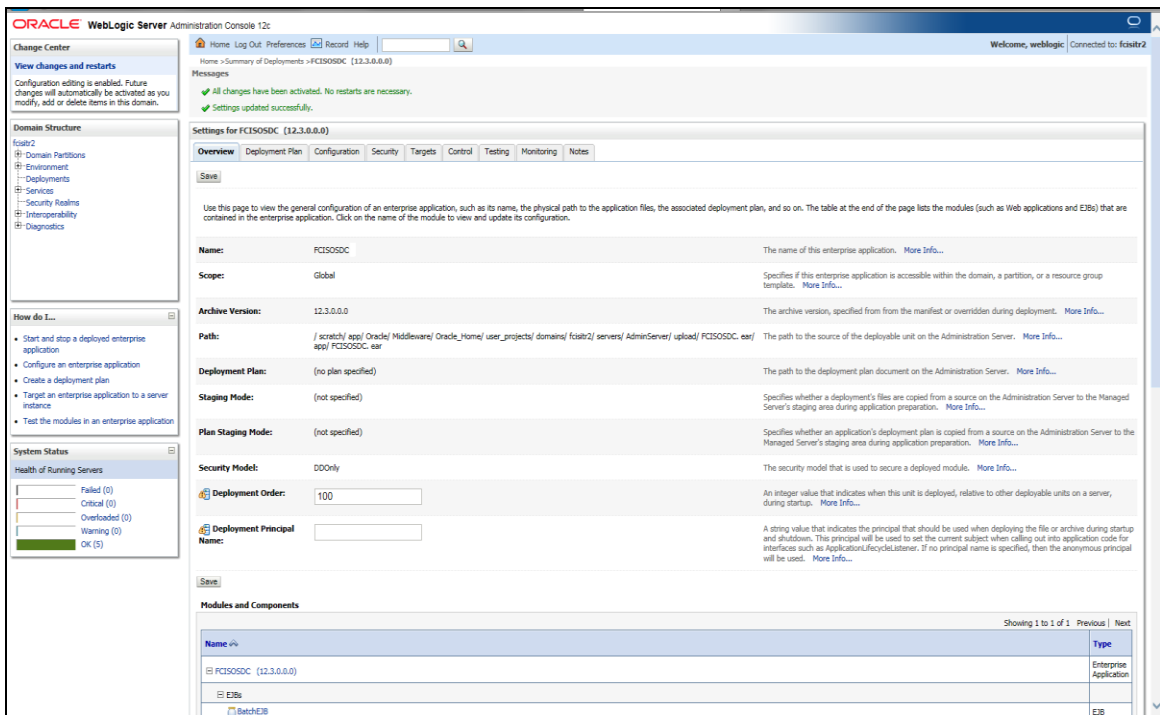

15. Click 'Deployment' on the left pane. The following screen is displayed.

The screenshot shows the Oracle WebLogic Server Administration Console. The left pane is expanded to 'Deployments'. The main area displays the 'Summary of Deployments' page. It includes a 'Configuration' tab and a table of deployments. The table has columns: Name, State, Health, Type, Targets, Scope, Domain Partitions, and Deployment Order. One deployment is listed: FCISOSDC (12.3.0.0.0) with a State of 'Active' and Health of 'OK'.


| Name                  | State  | Health | Type                   | Targets    | Scope  | Domain Partitions | Deployment Order |
|-----------------------|--------|--------|------------------------|------------|--------|-------------------|------------------|
| FCISOSDC (12.3.0.0.0) | Active | OK     | Enterprise Application | OSDCServer | Global |                   | 100              |

16. Click on the FCISOSDC deployment and the following screen will be displayed.

The screenshot shows the 'Settings for FCISOSDC(12.3.0.0.0)' page in the Oracle WebLogic Server Administration Console. The left pane is expanded to 'Deployments'. The main area displays the 'Settings' page for the selected deployment. It includes a 'Configuration' tab and a table of settings. The table has columns: Name, Scope, Archive Version, Path, Deployment Plan, Staging Mode, Plan Staging Mode, Security Model, Deployment Order, and Deployment Principal. The settings are as follows:


| Name     | Scope  | Archive Version | Path  | Deployment Plan     | Staging Mode    | Plan Staging Mode | Security Model | Deployment Order | Deployment Principal |
|----------|--------|-----------------|---|---------------------|-----------------|-------------------|----------------|------------------|----------------------|
| FCISOSDC | Global | 12.3.0.0.0      | /scratch/app/Oracle/Middleware/Oracle_home/user_projects/domains/foair2/servers/AdminServer/upload/FCISOSDC.ear | (no plan specified) | (not specified) | (not specified)   | DDOnly         | 100              |                      |

17. Select Control tab in order to start or stop a deployed enterprise application. The following screen will be displayed.

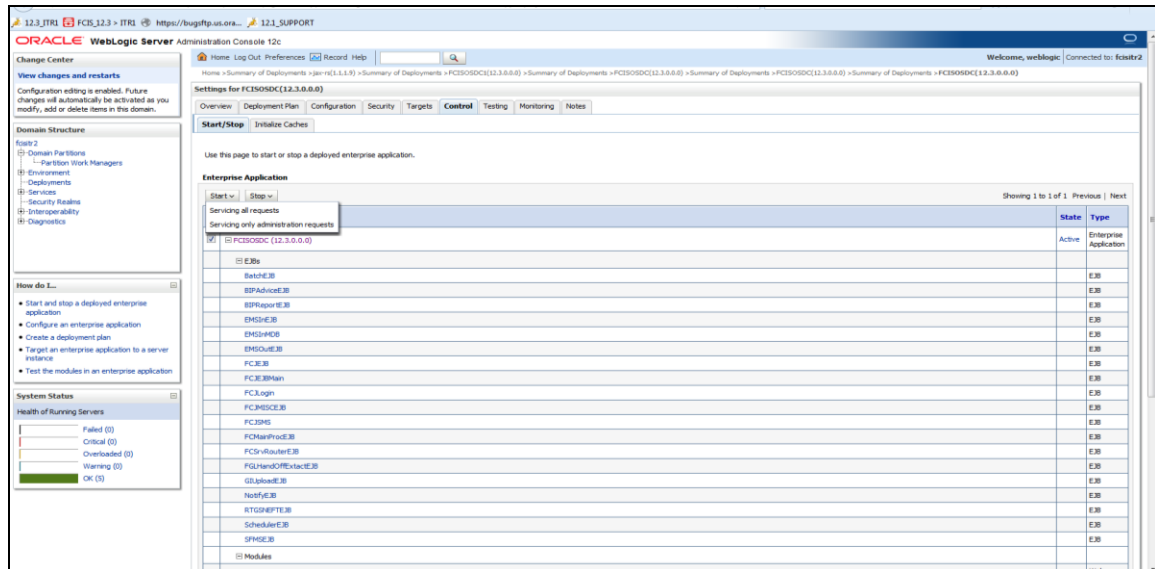

18. To start, click 'Start' drop-down button and select 'Servicing all requests' on the deployment.

19. The following screen will be displayed.

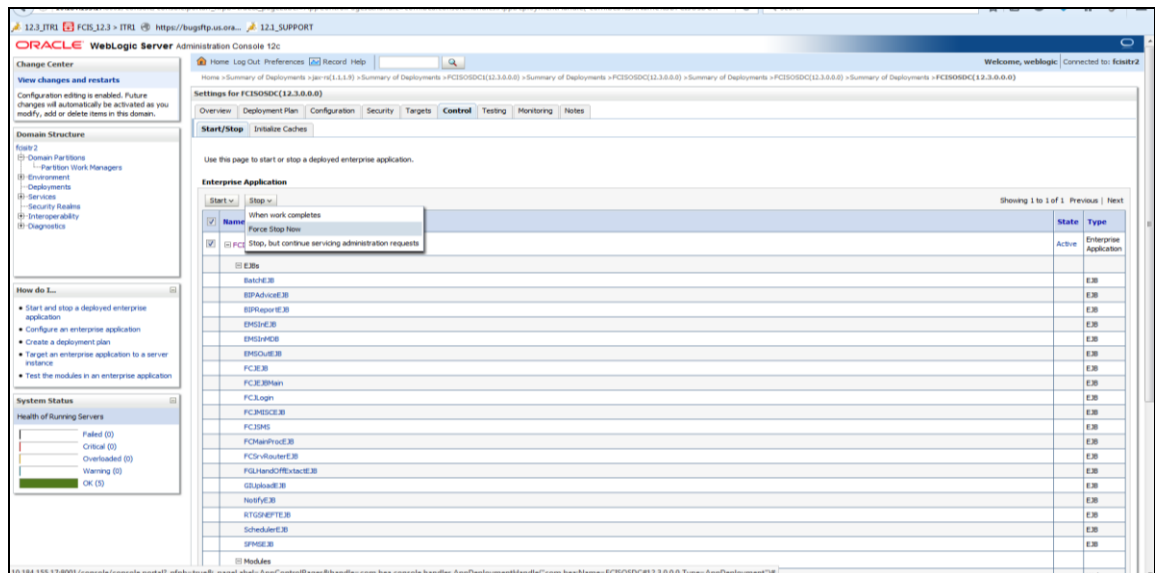

20. To stop, select the 'Stop' drop-down and select 'Force Stop now' option in the deployment.

This completes the deployment process.





Deploying Oracle FLEXCUBE on WebLogic  
[May] [2019]  
Version 14.1.0.0.0

Oracle Financial Services Software Limited  
Oracle Park  
Off Western Express Highway  
Goregaon (East)  
Mumbai, Maharashtra 400 063  
India

Worldwide Inquiries:  
Phone: +91 22 6718 3000  
Fax: +91 22 6718 3001  
[www.oracle.com/financialservices/](http://www.oracle.com/financialservices/)

Copyright © [2007], [2019], Oracle and/or its affiliates. All rights reserved.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

**U.S. GOVERNMENT END USERS:** Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate failsafe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

This software or hardware and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.