Configuring Internet Explorer Oracle FLEXCUBE Universal Banking Release 14.4.0.0.0 [May] [2020]



Table of Contents

1.	CO	ONFIGURING INTERNET EXPLORER	1-1
	1.1	CONFIGURING INTERNET OPTIONS	1-1
	1.2	CREATING SHORTCUT FOR ORACLE FLEXCUBE APPLICATION BROWSER WITH - NOMERGE PARAME	ETER 1-5
	1.3	SETTING COMPATIBILITY VIEW(IE 8 ONWARDS)	1-7
	1.4	SUPPRESSING COMPATIBILITY VIEW REFRESH	
	1.5	CLEARING THE CACHE	1-8
	1.6	SUPPRESSING CACHING	
	1.7	Settings for Trusted Sites	1-10
	1.8	SETTINGS FOR POP-UP BLOCKER	1-12
	1.9	INTERNET EXPLORER 11 SETTINGS	1-13
	1.10	BROWSER BEHAVIOUR	1-13



1. Configuring Internet Explorer

Oracle FLEXCUBE does not support Microsoft Internet Explorer Beta, Partner Build or a Release Candidate. It must be the Final build of Microsoft Internet Explorer. You can view the version information from the Help menu of Internet Explorer. Select 'About Internet Explorer' from the Help menu.



1.1 Configuring Internet Options

In order to run Oracle FLEXCUBE, you need to configure the internet options as follows:

1. Start Internet Explorer. Go to Tools > Internet Options. The 'Internet Options' screen is displayed.



Select a z	one to view or change security settings.	0
Inter	net Local intranet Trusted sites Re	estricted sites
	Internet This zone is for Internet websites, except those listed in trusted and restricted zones.	Sites
	y level for this zone ed levels for this zone: Medium to High Medium-high - Appropriate for most websites	
-	 Prompts before downloading poten content Unsigned ActiveX controls will not b 	S - 1967 - 1978 - 1978 - 1978 - 1978 - 1978 - 1978 - 1978 - 1978 - 1978 - 1978 - 1978 - 1978 - 1978 - 1978 - 1 1979 - 1979 - 1979 - 1979 - 1979 - 1979 - 1979 - 1979 - 1979 - 1979 - 1979 - 1979 - 1979 - 1979 - 1979 - 1979 -
- 1	nable Protected Mode (requires restarting	Internet Explorer)
I ■	<u>C</u> ustom level	Default level

2. Under 'Security' tab, select 'Internet' and click 'Custom Level'. The security settings are displayed.



ettings		
0	Prompt	*
Du	lse Pop-up Blocker	
(Disable	
0	Enable	
	lse SmartScreen Filter	
0	Disable	
	Enable	
u	Iserdata persistence	
0	Disable	
	Enable	
	Vebsites in less privileged web content zo	one can navigate in
	Disable	1.20
) Enable	1.000
() Prompt	
Scrip		-
4	ctive scripting	•
*Takes eff	ect after you restart your computer	
eset custo	m settings	
eset to:		
cocc co.	Medium-high (default)	▼ R <u>e</u> set

- 3. Select 'Enable' for all options except for 'Use Pop-up Blocker'. Click 'OK'.
- 4. Repeat the above steps for the zone 'Local Intranet'.



elect a	tone to v	iew or chan	nge secur	ity settings.	0	
Inter	net [ocal intrane	t Trust	294000000000000000000000000000000000000	stricted sites	
	This zon	i tranet e is for all w n your intra		hat are	Site	25
Securit	y <u>l</u> evel fo	r this zone				
Allow	- Mec (ir 	ntranet) Most conten Unsigned Ac	for webs nt will be r ctiveX cor	ites on your lo un without pro itrols will not be d without prom	mpting you downloade	d
-				res restarting I		lorer)
-	nable <u>P</u> r		Cust	tom level	<u>D</u> efault	level

- 5. Once you have configured the Internet and Local Intranet options, click 'Apply'.
- 6. Once these settings are done, go to 'Advanced' tab and check the box 'Use JRE (Version) for appletscondition.com (version.com (version.com (version.com) (vers




Internet Options
General Security Privacy Content Connections Programs Advanced
Settings
Send IDN server names for Intranet addresses
 Send UTF-8 URLs Show Information Bar for encoded addresses
Use UTF-8 for mailto links
🛃 Java (Sun)
Use JRE 1.6.0_16 for <applet> (requires restart)</applet>
📄 Microsoft VM
Java console enabled (requires restart)
JIT compiler for virtual machine enabled (requires restart)
Always use ClearType for HTML*
Enable automatic image resizing
✓ Play animations in webpages*
*Takes effect after you restart Internet Explorer
<u>R</u> estore advanced settings
Reset Internet Explorer settings
Deletes all temporary files, disables browser add-ons, and resets all the changed settings.
You should only use this if your browser is in an unusable state.

1.2 <u>Creating Shortcut for Oracle FLEXCUBE Application Browser</u> with –nomerge Parameter

To create shortcut for Oracle FLEXCUBE application browser, follow the steps given below:

1. Right click on Desktop, mouse over 'New' and select 'Shortcut'.

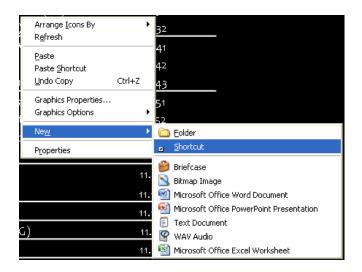



2. The 'Create Shortcut' window is displayed:

Create Shortcut	
	This wizard helps you to create shortcuts to local or network programs, files, folders, computers, or Internet addresses. Iype the location of the item: Browse Click Next to continue.
	< <u>B</u> ack Next > Cancel

- 3. Click 'Browse' button and select 'IExplorer.exe' from its location.
- 4. To create a shortcut for Oracle FLEXCUBE login page, specify the location of the item in the following format:

"Location_of_Internet_Explorer" -- nomerge "< Application_URL>"

Eg: "C:\Program Files\Internet Explorer\iexplore.exe" -nomerge "<Application_URL>"

In this case C:\Program Files\Internet Explorer\iexplore.exe is the location of Internet Explorer.

5. Click 'Next'.

The following screen is displayed:

Select a Title for the	Program 🔀
	Type a name for this shortcut: FCUBS Login Page
	Click Finish to create the shortcut.
	< <u>B</u> ack Finish Cancel

6. Specify a name for the shortcut.



- 7. Click 'Finish'.
- 8. On the Desktop, you can find a shortcut to access the Oracle FLEXCUBE login page.



1.3 Setting Compatibility View(IE 8 onwards)

The URL of the Oracle FLEXCUBE UBS should not be there in the Compatibility View list of the Internet Explorer. You need to follow the URL from compatibility view list by following the steps below:

1. Start Internet Explorer. Go to Tools > Compatibility View Settings.

The following screen is displayed:

Blath Page - Windows Internet Explorer		- 0 -
Compatibility View Settings		1.0
You can util and remove velocities to be doplayed in Compatibility West.	- Effentional El Million El Lako Stato Gala el montante	
Websiter you've added to Compatibility West		
Dischalls updatied websites lates from Microsoft Display all vebsites in Compatibility View Display all vebsites in Compatibility View		

- 2. Under 'Websites you've added to Compatibility View', check whether the URL to Oracle FLEXCUBE Application is listed or not. If the URL is listed, select it.
- 3. Click on 'Remove' button. The URL will be removed. Further, click 'Close' button.

1.4 Suppressing Compatibility View Refresh

You can suppress the Internet Explorer 8 to refresh the webpage to compatibility view. Follow the steps given below:

1. Start Internet Explorer. Go to Tools > Internet Options. Select 'Advanced' tab.



A shout blank	😸 👫 🐹 🕅 stops	P
a LR. view fragment finds that		
🕐 Pavarites 🛛 🤹 🦉 Internet Explorer & Readine 🍺 Suppress 7 Store - 🛄 Free Hotmail 🚦	🖉 MSN.com 🚮 Radio Station Guide 😰 mini Sim Galary +	
Clark Page	∰ • @	Safaty + Tudi + 😝 + 1
derset Options 🖉 😰		1
General Socarity Privacy Content Concentients Programs Advanced Settings		
Constitutive Adverse segared ALT test for marges Adverse segared ALT test for marges Adverse testing for new vendows and table Adverse testing for new vendows and table Reset test as to seakbar for new vendows and table Reset test as to seakbar for new vendows and table Reset test as to seakbar for new vendows and table Adversettably resource from page legitate testing Cose unused tables in history and two forms Cose unused tables in history and two forms Cose unused tables in history and two forms Dealede scott dobugging (Ditmat) Dealers a notification about evens stript sense Reset tables resource from page legitate testing Adversettably resource from page legitate testing Dealers a notification about evens stript sense Dealers a notification about evens stript sense Reset test as the vende testing Reset test as the resource testing testing		

- 2. In the settings, uncheck the option 'Automatically recover from page layout errors with Compatibility View' under 'Browsing'.
- 3. Click 'OK'.

1.5 Clearing the Cache

This section explains the method of clearing Internet Explorer cache. Follow the steps given below:

1. Start Internet Explorer. Go to Tools > Internet Options. Select 'General' tab.



Black Page - Wiecow Internet Lepters	
G bout blerk	· + × 세~~ · · · · · · · · · · · · · · · · · ·
In LR. www. Faures. Dott. 140.	
👷 Parvarites 🛛 🦕 🦉 Internet Explorer & Readine 💋 Support State 🔹 💽 Free Hotmail 🔝	MSN.com 🌃 Radio Station Guide 👩 men Sine Colore 🔹
Clark Page	🐴 + 🖽 🖂 👾 + Pape + Salaty + Taola + 😝 - 1
Internet Options 🛛 😨 🛃	
General Security Privacy Content Connections Programs Advanced	
Howe page	
To create home page table, type each address on its own line.	
all And	
Use manent Use default Use tiles	
Browing history	
Delete temporary files, fistory, cookies, saved passwords, and web form information.	
Celete browsing history on exit	
Delete Settings	
Search	
Charge search defaults.	
Tidai	
Charge how netpages are displayed in Sattings	
Accelerator	
Colors Languages Ports Accessibility	
OK Cancel	

- 2. Check the option 'Delete browsing history on exit'.
- 3. To clear the existing cache, click 'Delete' button.

1.6 Suppressing Caching

You can suppress caching the Internet details. Follow the steps given below:

1. Start Internet Explorer. Go to Tools > Internet Options. Select 'General' tab.



2. Under 'Browsing History', click 'Settings' button.

emporary Internet Files	History	Caches and database	s
Internet Explorer stores for faster viewing later.	copies of	webpages, images, and	d media
Check for newer versions	ofstored	pages:	
🔘 <u>E</u> very time I visit th	ne webpa	ge	
 Every time I start I Automatically 	internet E	xplorer	
💿 <u>N</u> ever			
Disk space to use (8-1024 (Recommended: 50-250		250	<u>*</u>
Current location:			
C:\Users\RAMYAVAI\App[Femporary Internet Files\	1	l\Microsoft\Windows\	
Move folder	View <u>o</u> bje	cts View files	5

- 3. Against 'Check for newer versions of stored pages', set the option 'Automatically'.
- 4. Click 'OK'. You will be navigated back to the 'Internet Options' screen. Click 'OK'.

1.7 Settings for Trusted Sites

In order to remove the site from the list of trusted sites, follow the steps given below:

1. Start Internet Explorer. Go to Tools > Internet Options.

Select 'Security' tab.



	curity	Privacy		Connections	Programs	Advanc
Select a zor		iew or cha ocal intra	9		Stricted	
<u>с</u>	nis zone	i tranet e is for all n your intr	websites t anet.		sites	25
Security I						
Second St.	l levels Med - A (in - N - L	for this zo lium-low Appropriat tranet) Most conte Unsigned /	one: All e for webs ent will be r ActiveX cor	ites on your lo run without pro itrols will not b f without prom	ompting you e downloade	d
Allowed	l levels Med - A (in - N - L - S	for this zo lium-low Appropriat tranet) Most conte Jost conte Josigned J Game as M	one: All te for webs ent will be r ActiveX cor ledium leve lode (requi	un without pro trols will not b	ompting you e downloade Ipts	lorer)

- 2. Click 'Local Intranet' zone.
- 3. Click 'Sites' button.

Following screen is displayed:



Local intranet	
Use the settings below to define which websites are included in the local intranet zone.	
Automatically detect intranet network	
Include all local (intranet) sites not listed in other zones	
Include all sites that bypass the groxy server Include all network paths (UNCs)	
What are intranet settings? Advanced OK Cancel]

- 4. Uncheck all the options on the screen.
- 5. Click on 'OK'.

1.8 Settings for Pop-up Blocker

You need to configure the pop-up blocker settings for Internet Explorer. Follow the steps given below:

1. Start Internet Explorer. Go to Tools > Pop-up Blocker > Pop-up Blocker Settings.

The following screen is displayed:



Exceptions Pop-ups are currently blocked. You can allow websites by adding the site to the list below. Address of website to allow:	w pop-ups from specific
[Add
Allowed sites:	
ileaming.oracle.com	Remove
	Remove all
Notifications and blocking level:	
Play a sound when a pop-up is blocked.	
Show Notification bar when a pop-up is blocked.	
Blocking level:	
Medium: Block most automatic pop-ups	

- 2. Enter the URL in the field 'Address of website to allow'.
- 3. Click 'Add' button. The URL will be added to the allowed list. Click 'Close' button.

1.9 Internet Explorer 11 Settings

Do not save the password while login to application. In internet explorer make sure that the below check boxes are uncheck. Tools > Internet Options > Content > Auto Complete > Settings > Use Auto Complete For > User names and passwords on forms & Ask me before saving password.

1.10 Browser Behaviour

On clicking List of Values (LOV) button in the application, the cursor is positioned before the '%' symbol in the query field.





Configuring Internet Explorer [May] [2020] Version 14.4.0.00

Oracle Financial Services Software Limited Oracle Park Off Western Express Highway Goregaon (East) Mumbai, Maharashtra 400 063 India

Worldwide Inquiries: Phone: +91 22 6718 3000 Fax: +91 22 6718 3001 https://www.oracle.com/industries/financial-services/index.html

Copyright © 2007, 2020, Oracle and/or its affiliates. All rights reserved.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate failsafe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

This software or hardware and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.