

# Oracle Banking Digital Experience

IDCS-OBDX Setup Guide  
Release 19.2.0.0.0

Part No. F25153-01

December 2019

**ORACLE®**

Oracle Financial Services Software Limited

Oracle Park

Off Western Express Highway

Goregaon (East)

Mumbai, Maharashtra 400 063

India

Worldwide Inquiries:

Phone: +91 22 6718 3000

Fax: +91 22 6718 3001

[www.oracle.com/financialservices/](http://www.oracle.com/financialservices/)

Copyright © 2019, Oracle and/or its affiliates. All rights reserved.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate failsafe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

This software or hardware and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

# Table of Contents

<b>1. Preface</b> .....	<b>5</b>
1.1 Intended Audience .....	5
1.2 Documentation Accessibility .....	5
1.3 Access to OFSS Support .....	5
1.4 Structure.....	5
1.5 Related Information Sources.....	5
<b>2. Pre-requisite step:</b> .....	<b>6</b>
2.1 To create groups and user in IDCS .....	6
2.2 Install OpenSSL .....	13
2.3 OAM installation not required.....	13
<b>3. Apply Oracle OPSS SCIM Identity Store OPatch on Weblogic server</b> .....	<b>14</b>
<b>4. Extending Weblogic Domain to load 'Oracle OPSS SCIM Identity Store' template</b> .....	<b>17</b>
<b>5. Change JPS configurations</b> .....	<b>19</b>
<b>6. Create an OBDX Client Application in IDCS Console</b> .....	<b>20</b>
<b>7. Configure OPSS IDCS Identity Store Service</b> .....	<b>29</b>
<b>8. Adding IDCS as an Identity Provider in Weblogic Security Realms</b> .....	<b>34</b>
<b>9. Application Server Changes</b> .....	<b>40</b>
9.1 Add below argument to Managed server: .....	40
9.2 Managed Server Start Configurations.....	41
<b>10. Change in Weblogic Deployments</b> .....	<b>42</b>
10.1 Creating a Connection in Connector ear.....	42

11.	<b>Create Client Applications for Internal OBDX Apps in IDCS Console</b>	46
12.	<b>Database Scripts (to be executed after day0 scripts)</b>	51
13.	<b>Apply <i>Webgate Patch on OHS</i> using OPatch</b>	53
14.	<b>cloud.config</b>	55
15.	<b>cloud.policy</b>	56
16.	<b>CWallet configuration</b>	59
17.	<b>Enabling webgate in httpd.conf</b>	62
18.	<b>Change in mod_wl_ohs.conf</b>	63
19.	<b>UI Changes</b>	64
19.1	constants.js:	64
19.2	idcs-config.json:	64

# 1. Preface

## 1.1 Intended Audience

This document is intended for the following audience:

- Customers
- Partners

## 1.2 Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

## 1.3 Access to OFSS Support

Oracle customers have access to electronic support through My Oracle Support. For information, visit

<http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

## 1.4 Structure

This manual is organized into the following categories:

Preface gives information on the intended audience. It also describes the overall structure of the User Manual.

The subsequent chapters describes following details:

- Introduction
- Preferences & Database
- Configuration / Installation.

## 1.5 Related Information Sources

For more information on Oracle Banking Digital Experience Release 19.2.0.0.0, refer to the following documents:

- User Manual Oracle Banking Digital Experience Installation Guide

## 2. Pre-requisite step:

### 2.1 To create groups and user in IDCS

1. Access your Oracle Identity Cloud Service instance (for example: <https://<tenant-base-url>/ui/v1/adminconsole>) and log in with your Identity Domain Administrator credentials.

#### Glossary of Parameters:

<b>&lt;tenant-name&gt;</b>	Tenant name of your IDCS instance
<b>&lt;tenant-base-url&gt;</b>	Tenant base URL used to access your IDCS instance
<b>&lt;base-url&gt;</b>	Base URL used to access your IDCS instance without tenant name

2. Click on **Add a group** button shown below.

The screenshot displays the Oracle Identity Cloud Service (IDCS) Admin Console interface. At the top, the user is logged in as admin@oracle.com. The dashboard provides a summary of system metrics and actions:

- Users:** 190 Total, 9 Created, 0 Removed
- Applications:** 50 Total, 8 Created, 0 Removed
- Groups:** 9 Total, 0 Created, 0 Removed. An "Add a group." button is visible on the Groups card.
- Passwords:** 27 Total
- Logins:** 219 Total
- All Reports:** 5 Total

3. Enter the group name and group description for 'administrator' as shown below.

The screenshot shows a window titled "Add Group" with a close button (X) in the top right corner. Inside the window, the title "Step 1: Groups Details" is displayed. Below the title, there are three input fields: a required field for "Name" containing the text "administrator", a "Description" field containing "Administrator", and a checkbox labeled "User can request access" which is currently unchecked. At the bottom right of the window, there are two buttons: a "Next" button and a "Finish" button.

4. Click **Finish**. You will get a message 'Group administrator has been successfully added.'
5. On **Groups** screen, click on **Create a group** button. Enter the group name and group description for 'retailuser' as shown below.

The screenshot shows a dialog box titled "Add Group" with a close button (X) in the top right corner. Inside the dialog, the main content area is titled "Step 1: Groups Details". Below the title, there are three input fields: a text box for "Name" containing "retailuser", a text area for "Description" containing "Retail User", and a checkbox labeled "User can request access" which is checked. At the bottom right of the dialog, there are two buttons: "Next" and "Finish".

6. Click **Finish**. You will get a message 'Group retailuser has been successfully added.'
7. On **Groups** screen, click on **Create a group** button. Enter the group name and group description for 'corporateuser' as shown below.



The screenshot shows a window titled "Add Group" with a close button (x) in the top right corner. Inside the window, the title "Step 1: Groups Details" is displayed. Below the title, there are three input fields: a text box for "Name" containing "corporateuser", a text box for "Description" containing "Corporate User", and a checkbox labeled "User can request access" which is checked. At the bottom right of the window, there are two buttons: "Next" and "Finish".

8. Click **Finish**. You will get a message 'Group corporateuser has been successfully added.'
9. Click on **Add a user** button on **Dashboard** screen as shown below.

Filter by Date Range: Last 30 Days

Category	Total	Created	Removed
Users	190	9	0
Applications	50	8	0
Groups	9	0	0
Passwords	27	-	-
Logins	218	-	-
All Reports	5	-	-

10. On the next screen, enter details of a new user 'superadmin' shown below.

### Add User

## Step 1: Add User Details

The user name will be used to log in, and the email address will be flagged as the primary email address for the user.

\* First Name


\* Last Name

\* User Name

\* Email

Use the email address as the user name

11. Click **Next**. You will get a list of existing groups in IDCS to which the user 'superadmin' can be assigned. Select group '**administrator**'.

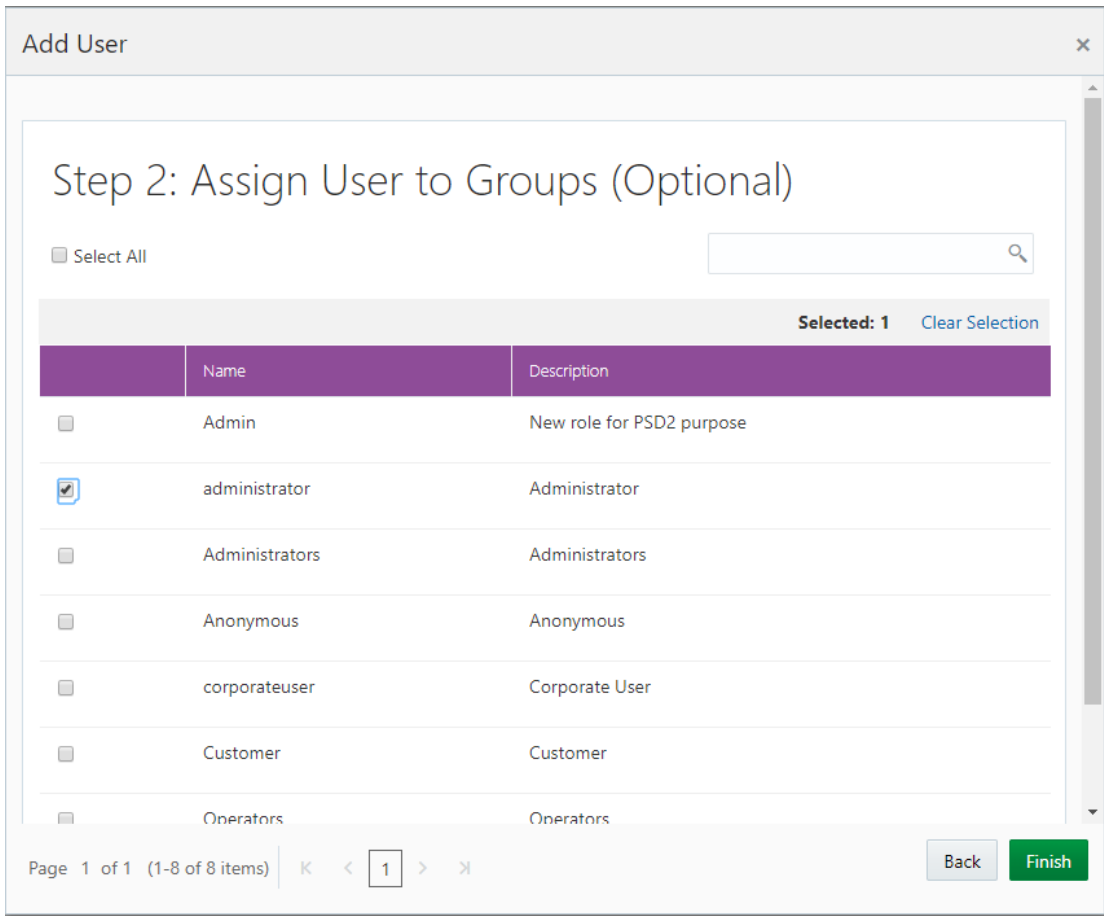

12. Click **Finish**. The user 'superadmin' will be created and assigned 'administrator' group.

## 2.2 Install OpenSSL

Eg. [root@obdxohs devops]# yum install openssl\*

## 2.3 OAM installation not required

Oracle Access Manager installation is not required for this setup.

### 3. Apply Oracle OPSS SCIM Identity Store OPatch on Weblogic server

1. Download the patch from the below link.  
ARU 22260908
2. Extract the zip on weblogic machine.
3. Shutdown Managed and Admin weblogic server.

**Glossary of Parameterized path:**

<b>oracle-home-path</b>	Oracle Home path of Fusion Middleware Application (Weblogic/OHS)
<b>jre-path</b>	Location where jre is installed
<b>local-patch-path</b>	Location where relevant patch folder is stored locally. Eg. Location of 27644158 folder
<b>weblogic-domain-path</b>	Location where weblogic domain is installed
<b>jdk-path</b>	Location of JDK
<b>ohs-domain-path</b>	Location where OHS domain is installed

4. Run below commands on Weblogic machine.

```
[devops@obdxwls ~]$ export ORACLE_HOME=<oracle-home-path>
```

Eg. export ORACLE\_HOME=/home/devops/Oracle/Middleware/Oracle\_Home/

```
[devops@obdxwls ~]$ export PATH=$PATH:<oracle-home-path>/OPatch/
```

Eg. export PATH=\$PATH:/home/devops/Oracle/Middleware/Oracle\_Home/OPatch/

```
[devops@obdxwls ~]$ opatch lsinventory -jre <jre-path>
```

Eg. opatch lsinventory -jre /home/devops/jdk18/jre/

```
[devops@obdxwls ~]$ cd <local-patch-path>
```

Eg. cd /scratch/obdx/wls/p27644158\_122130\_Generic/27644158/

```
[devops@obdxwls 27644158]$ opatch apply
```

```
@obdxwls/scratch/obdx/wls/Setup/27644158
Bugs fixed:
25559137, 25232931, 24811916

Patch 26051289 : applied on Fri May 04 10:55:03 UTC 2018
Unique Patch ID: 21455037
Patch description: "One-off"
Created on 31 Jul 2017, 22:11:57 hrs UTC
Bugs fixed:
26051289

-----

OPatch succeeded.
[devops@obdxwls Oracle_Home]$ cd /scratch/obdx/wls/Setup/27644158/
[devops@obdxwls 27644158]$ ls -la
total 32
drwxr-xr-x 4 54322 54322 4096 Oct 12 08:01 .
drwxr-xr-x 3 54322 54322 4096 Oct 12 08:01 ..
-rw-rw-r-- 1 54322 54322 27 Jun 14 19:41 README.html
-rw-rw-r-- 1 54322 54322 8898 Jun 14 19:41 README.txt
drwxr-xr-x 3 54322 54322 4096 Oct 12 08:01 etc
drwxr-xr-x 6 54322 54322 4096 Oct 12 08:01 files
[devops@obdxwls 27644158]$ opatch apply
Oracle Interim Patch Installer version 13.9.2.0.0
Copyright (c) 2018, Oracle Corporation. All rights reserved.

Oracle Home      : /home/devops/Oracle/Middleware/Oracle_Home
Central Inventory : /home/devops/oraInventory
                  from   : /home/devops/Oracle/Middleware/Oracle_Home/oraInst.loc
OPatch version   : 13.9.2.0.0
OUI version      : 13.9.2.0.0
Log file location: /home/devops/Oracle/Middleware/Oracle_Home/cfgtoollogs/patch/patch2018-10-12_08-03-04AM_1.log

OPatch detects the Middleware Home as "/home/devops/Oracle/Middleware/Oracle_Home"

Verifying environment and performing prerequisite checks...
OPatch continues with these patches: 27644158

Do you want to proceed? [y/n]
```

### 5. Press 'y'

```
@obdxwls/scratch/obdx/wls/Setup/27644158
-----

OPatch succeeded.
[devops@obdxwls Oracle_Home]$ cd /scratch/obdx/wls/Setup/27644158/
[devops@obdxwls 27644158]$ ls -la
total 32
drwxr-xr-x 4 54322 54322 4096 Oct 12 08:01 .
drwxr-xr-x 3 54322 54322 4096 Oct 12 08:01 ..
-rw-rw-r-- 1 54322 54322 27 Jun 14 19:41 README.html
-rw-rw-r-- 1 54322 54322 8898 Jun 14 19:41 README.txt
drwxr-xr-x 3 54322 54322 4096 Oct 12 08:01 etc
drwxr-xr-x 6 54322 54322 4096 Oct 12 08:01 files
[devops@obdxwls 27644158]$ opatch apply
Oracle Interim Patch Installer version 13.9.2.0.0
Copyright (c) 2018, Oracle Corporation. All rights reserved.

Oracle Home      : /home/devops/Oracle/Middleware/Oracle_Home
Central Inventory : /home/devops/oraInventory
                  from   : /home/devops/Oracle/Middleware/Oracle_Home/oraInst.loc
OPatch version   : 13.9.2.0.0
OUI version      : 13.9.2.0.0
Log file location: /home/devops/Oracle/Middleware/Oracle_Home/cfgtoollogs/patch/patch2018-10-12_08-03-04AM_1.log

OPatch detects the Middleware Home as "/home/devops/Oracle/Middleware/Oracle_Home"

Verifying environment and performing prerequisite checks...
OPatch continues with these patches: 27644158

Do you want to proceed? [y/n]
y
User Responded with: Y
All checks passed.

Please shutdown Oracle instances running out of this ORACLE_HOME on the local system.
(Oracle Home = '/home/devops/Oracle/Middleware/Oracle_Home')

Is the local system ready for patching? [y/n]
```

## 6. Press 'y'

```
@ebdxwls/scratch/obdx/wls/Setup/27644158
Oracle Interim Patch Installer version 13.9.2.0.0
Copyright (c) 2016, Oracle Corporation. All rights reserved.

Oracle Home      : /home/devops/Oracle/Middleware/Oracle_Home
Central Inventory : /home/devops/orainventory
FROM             : /home/devops/Oracle/Middleware/Oracle_Home/oraInst.loc
OPatch version   : 13.9.2.0.0
OUI version      : 13.9.2.0.0
Log file location : /home/devops/Oracle/Middleware/Oracle_Home/cfgtoollogs/patch/patch2018-10-12_08-03-04AM_1.log

OPatch detects the Middleware Home as "/home/devops/Oracle/Middleware/Oracle_Home"

Verifying environment and performing prerequisite checks...
OPatch continues with these patches: 27644158

Do you want to proceed? [y/n]
y
User Responded with: Y
All checks passed.

Please shutdown Oracle instances running out of this ORACLE_HOME on the local system.
(Oracle Home = '/home/devops/Oracle/Middleware/Oracle_Home')

Is the local system ready for patching? [y/n]
y
User Responded with: Y
Backing up files...
Applying interim patch '27644158' to OH '/home/devops/Oracle/Middleware/Oracle_Home'

Patching component oracle.opss.core, 12.2.1.3.0...
Patching component oracle.opss.jrf, 12.2.1.3.0...
Patching component oracle.opss.jrf, 12.2.1.3.0...
Patching component oracle.opss.wls, 12.2.1.3.0...
Patch 27644158 successfully applied.
Log file location: /home/devops/Oracle/Middleware/Oracle_Home/cfgtoollogs/patch/patch2018-10-12_08-03-04AM_1.log

OPatch succeeded.
[devops@ebdxwls 27644158]$
```



## 4. Extending Weblogic Domain to load 'Oracle OPSS SCIM Identity Store' template

1. Run the below commands.

```
[devops@obdxwls frmwconfig]$ cd <ORACLE-HOME-PATH>/oracle_common/common/bin/
```

Eg. cd /home/devops/Oracle/Middleware/Oracle\_Home/oracle\_common/common/bin/

```
[devops@obdxwls bin]$ ./wlst.sh
```

[This will take you to Weblogic Server Administration Scripting Shell]

```
@obdxwls~/Oracle/Middleware/Oracle_Home/oracle_common/common/bin
Log file location : /home/devops/Oracle/Middleware/Oracle_Home/cfgtoollogs/patch/patch2018-10-12_08-03-04AM_1.log

OPatch detects the Middleware Home as "/home/devops/Oracle/Middleware/Oracle_Home"
Verifying environment and performing prerequisite checks...
OPatch continues with these patches: 27644158

Do you want to proceed? [y/n]
Y
User Responded with: Y
All checks passed.

Please shutdown Oracle instances running out of this ORACLE_HOME on the local system.
(Oracle Home = "/home/devops/Oracle/Middleware/Oracle_Home")

Is the local system ready for patching? [y/n]
Y
User Responded with: Y
Backing up files...
Applying interim patch '27644158' to OH '/home/devops/Oracle/Middleware/Oracle_Home'

Patching component oracle.opss.core, 12.2.1.3.0...
Patching component oracle.opss.jrf, 12.2.1.3.0...
Patching component oracle.opss.jrf, 12.2.1.3.0...
Patching component oracle.opss.wls, 12.2.1.3.0...
Patch 27644158 successfully applied.
Log file location: /home/devops/Oracle/Middleware/Oracle_Home/cfgtoollogs/patch/patch2018-10-12_08-03-04AM_1.log

OPatch succeeded.
[devops@obdxwls 27644158]$ cd /home/devops/Oracle/Middleware/Oracle_Home/oracle_common/common/bin/
[devops@obdxwls bin]$ ./wlst.sh

Initializing WebLogic Scripting Tool (WLS) ...

Welcome to WebLogic Server Administration Scripting Shell

Type help() for help on available commands

wls:/offline>
```

2. Run the below commands in wlst :

```
wls:/offline>readDomain("<weblogic-domain-path>")
```

Eg. readDomain("/home/devops/domain/obdx\_domain")

```
wls:/offline/obdx_domain>selectTemplate("Oracle OPSS SCIM Identity Store")
```

```
wls:/offline/obdx_domain>loadTemplates()
```

```
wls:/offline/obdx_domain>updateDomain()
```

```
wls:/offline/obdx_domain>closeDomain()
```

```
wls:/offline/obdx_domain>exit()
```

```
@obdxwls~/Oracle/Middleware/Oracle_Home/oracle_common/common/bin
Initializing WebLogic Scripting Tool (WLST) ...
Welcome to WebLogic Server Administration Scripting Shell
Type help() for help on available commands
wls:/offline> exit
<function exit 2>
wls:/offline> exit()

Exiting WebLogic Scripting Tool.
[devops@obdxwls bin]$ ./wlst.sh
Initializing WebLogic Scripting Tool (WLST) ...
Welcome to WebLogic Server Administration Scripting Shell
Type help() for help on available commands
wls:/offline> readDomain("/home/devops/domain/obdx_domain")
wls:/offline/obdx_domain>selectTemplate("Oracle OPSS SCIM Identity Store")
Traceback (innermost last):
  (no code object) at line 0
  File "<console>", line 1
    ??selectTemplate("Oracle OPSS SCIM Identity Store")
    ^
SyntaxError: Lexical error at line 1, column 1. Encountered: "\ufffd" (65533), after : ""
wls:/offline/obdx_domain>selectTemplate("Oracle OPSS SCIM Identity Store")
Traceback (innermost last):
  (no code object) at line 0
  File "<console>", line 1
    ?selectTemplate("Oracle OPSS SCIM Identity Store")
    ^
SyntaxError: Lexical error at line 1, column 1. Encountered: "\ufffd" (65533), after : ""
wls:/offline/obdx_domain>selectTemplate("Oracle OPSS SCIM Identity Store")
wls:/offline/obdx_domain>loadTemplates()
wls:/offline/obdx_domain>updateDomain()
Oct 12, 2018 9:36:14 AM oracle.mds
WARNING: MDS-11019: The default CharSet US-ASCII is not a unicode character set. File names with non-ASCII characters may not operate as expected. Check locale settings
.
wls:/offline/obdx_domain>closeDomain()
wls:/offline>
```

## 5. Change JPS configurations

1. Add the following to the `jps-config.xml` at `<weblogic-domain-path>/config/fmwconfig/`
2. Remove `GenericIdentityStoreProvider` `serviceProvider` inside `<serviceProviders>` tag:

- ```
<serviceProvider
class="oracle.security.jps.internal.idstore.generic.GenericIdentityStoreProvider"
name="custom.provider" type="IDENTITY_STORE">
<description>Custom IdStore Provider</description>
</serviceProvider>
```

3. Remove `idstore.custom` `serviceInstance` inside `<serviceInstances>` tag:

- ```
<serviceInstance location="dumb" name="idstore.custom" provider="custom.provider">
<description>Custom Identity Store Service Instance</description>
<property name="idstore.type" value="CUSTOM"/>
<property name="ADF_IM_FACTORY_CLASS"
value="com.ofss.sms.dbAuthenticator.providers.db.DBIdentityStoreFactory"/>
<property name="DATASOURCE_NAME" value="DIGX"/>
</serviceInstance>
```

Inside the `<jpsContext name="default">` tag, if `idstore.custom` is present, then:


- Change `<serviceInstanceRef ref="idstore.custom"/>` to `<serviceInstanceRef ref="idstore.scim"/>`



## 6. Create an OBDX Client Application in IDCS Console

1. Go to IDCS Admin Console → Enter Admin user name and Password.
2. On Applications tab → Click on + sign → Confidential Application



### OBDX Client application details in IDCS:

<b>Name</b>	Is the OBDX Client Application Name in IDCS. Give a suitable name.
<b>connection_scheme</b>	http or https
<b>webserver_host_name</b>	Host name of web server
<b>webserver_port</b>	Port of web server
<b>Application URL</b>	<a href="#">&lt;connection_scheme&gt;://&lt;webserver_host_name&gt;:&lt;webserver_port&gt;</a>
<b>Redirect URL</b>	<a href="#">&lt;Application URL&gt;/oauth/callback</a>
<b>Primary Audience</b>	<a href="#">&lt;Name&gt;</a>
<b>Secondary Audience</b>	<a href="#">&lt;Application URL&gt;</a>


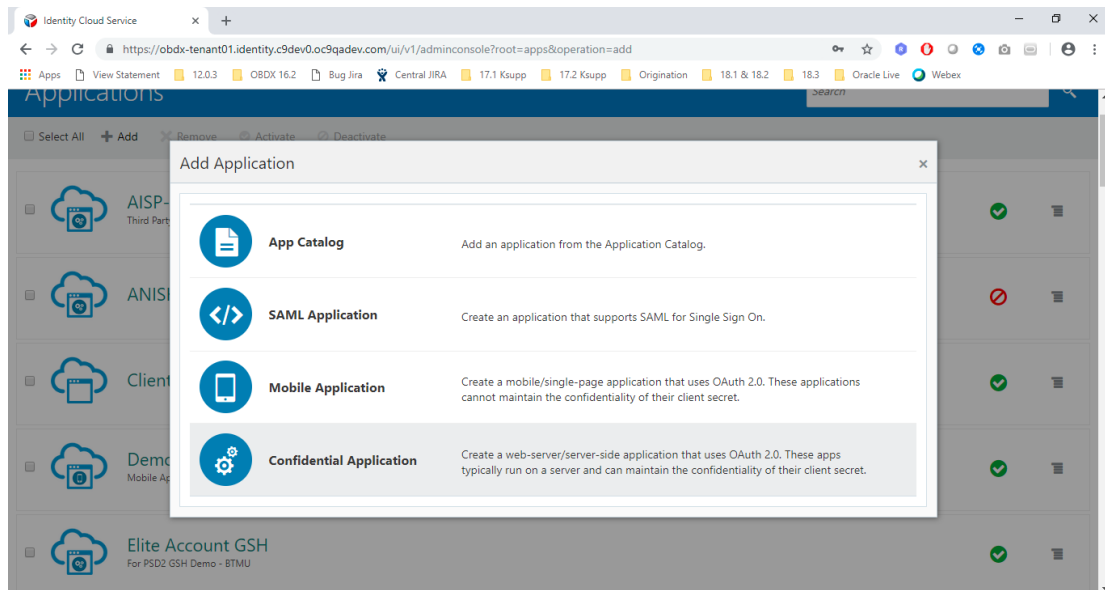


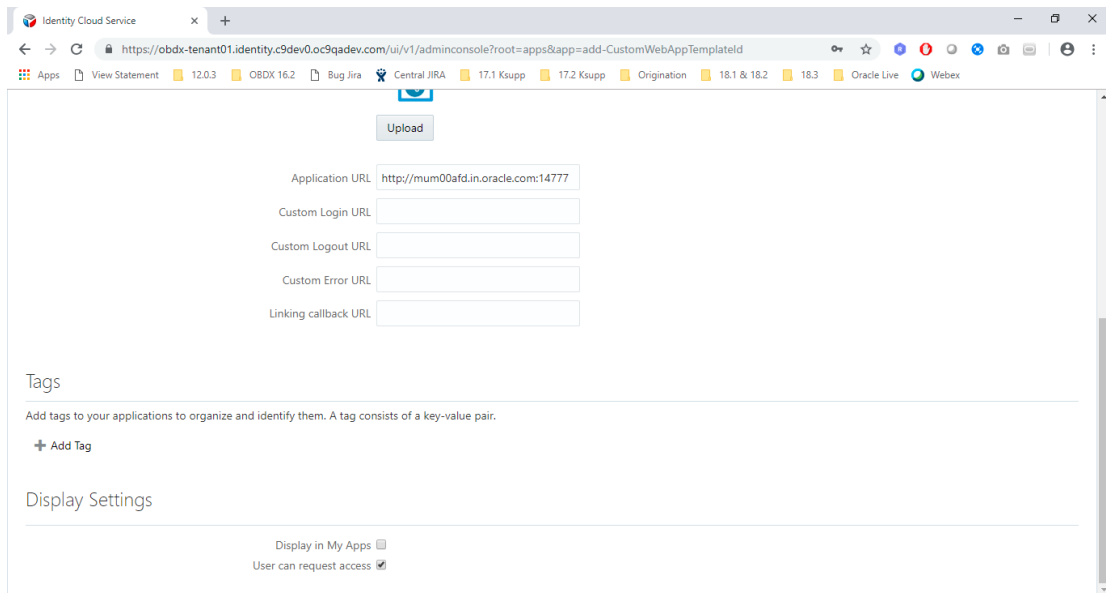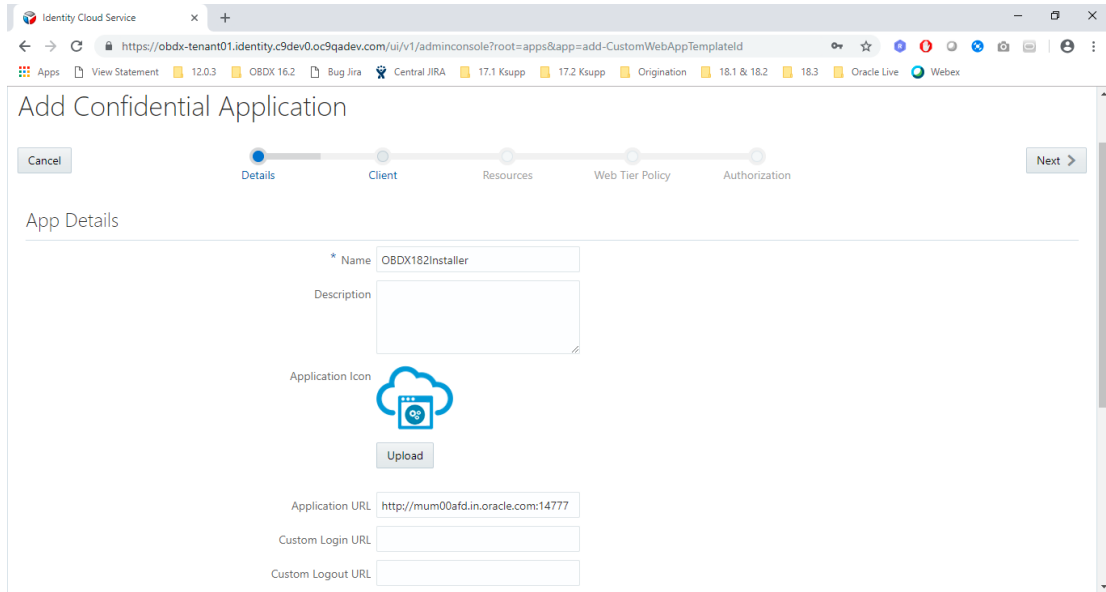


3. Click **Next**

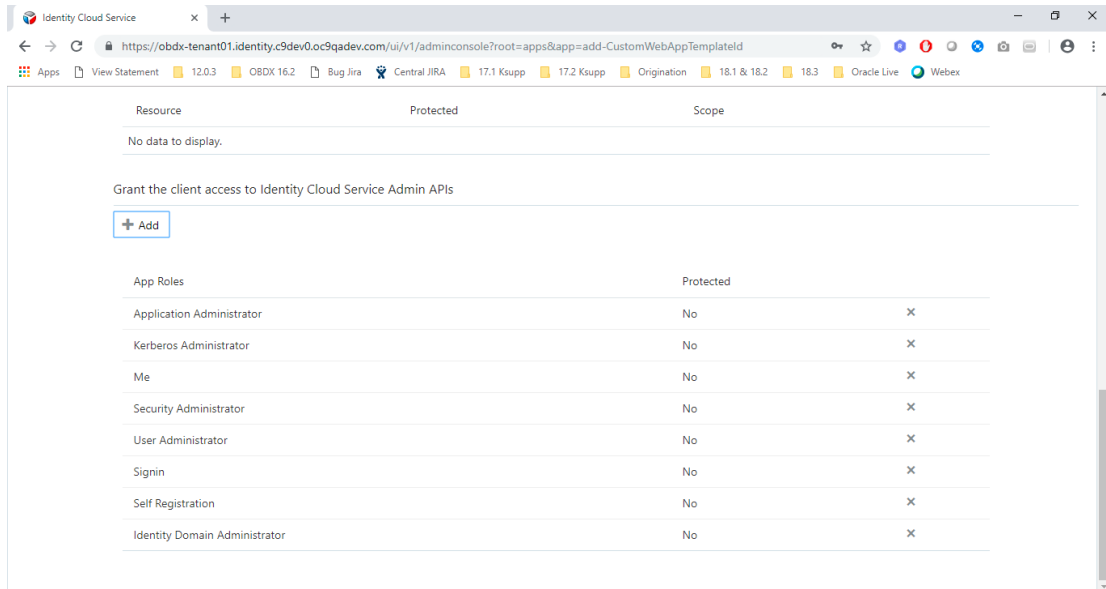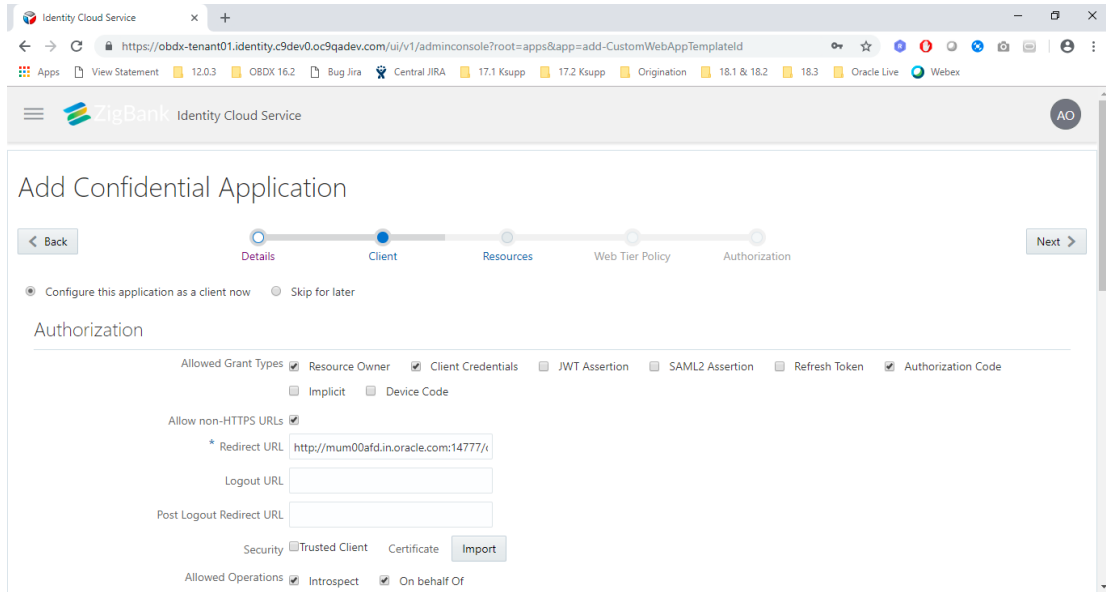


4. Click **Next**

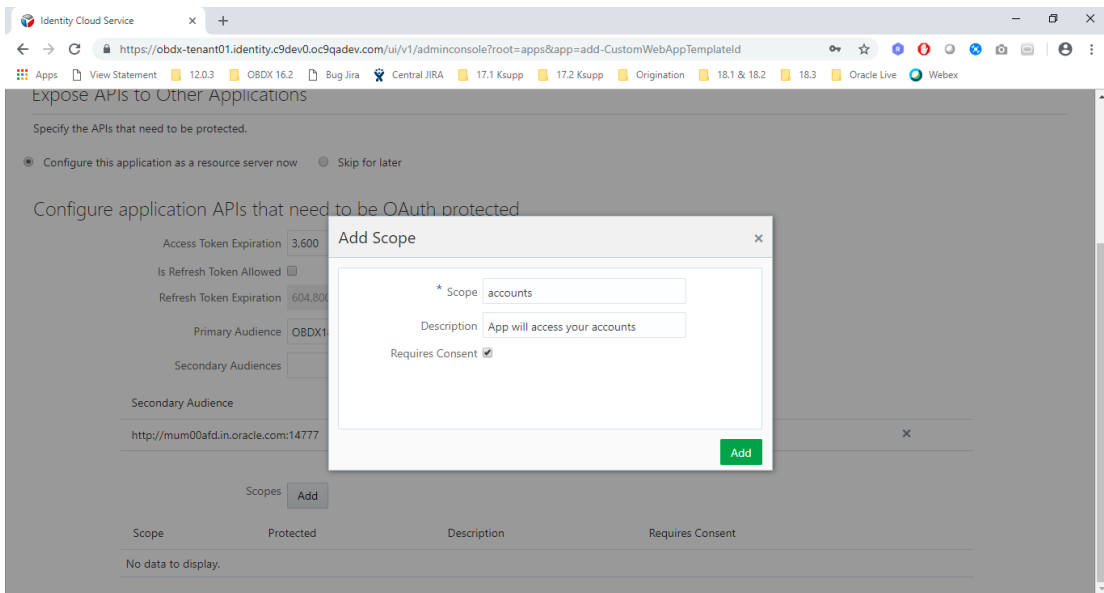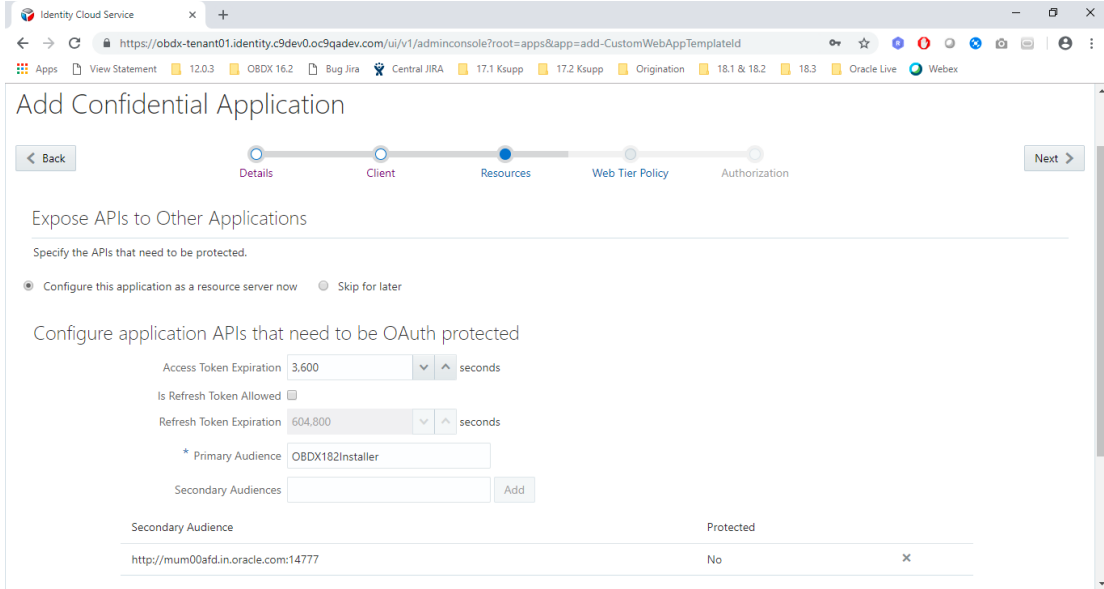

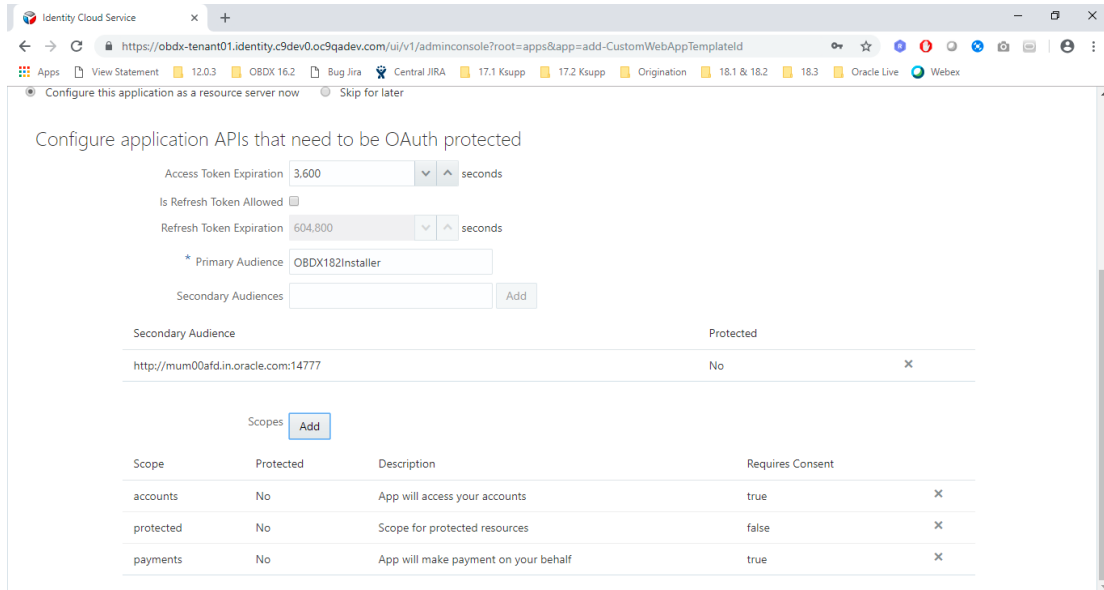

5. Go Back to **Client** tab and **Add Scope**

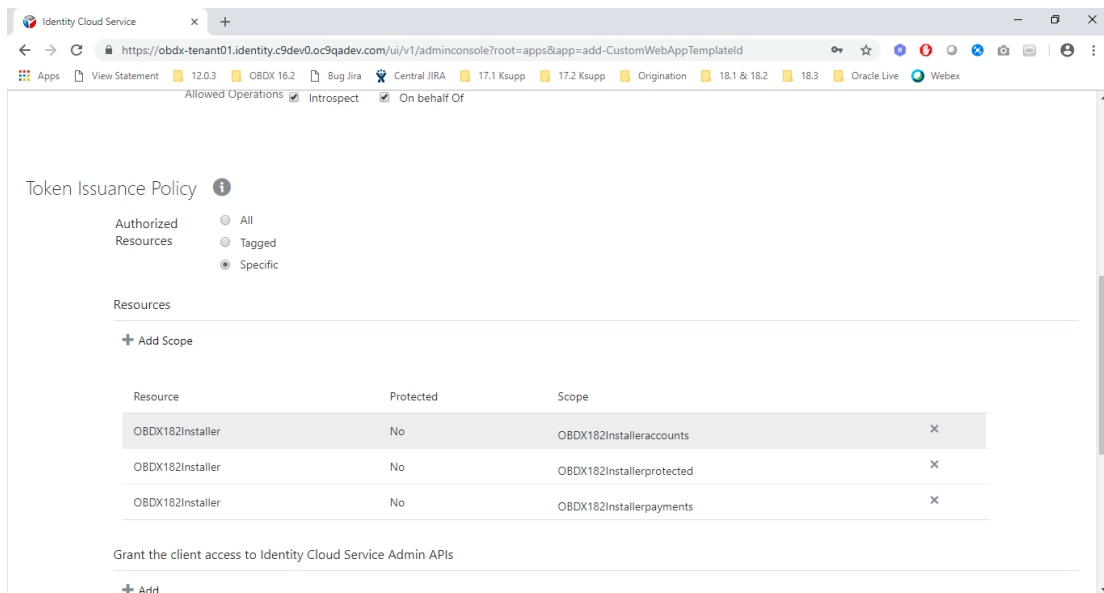


6. Note down the name of protected scope above.


<b>allowed_scope_name_of_protected_in_OBDX_Client_App</b>	Name of Protected scope. Eg. OBDX182Installerprotected
---	--

7. Next Go to **Web Tier Policy** tab




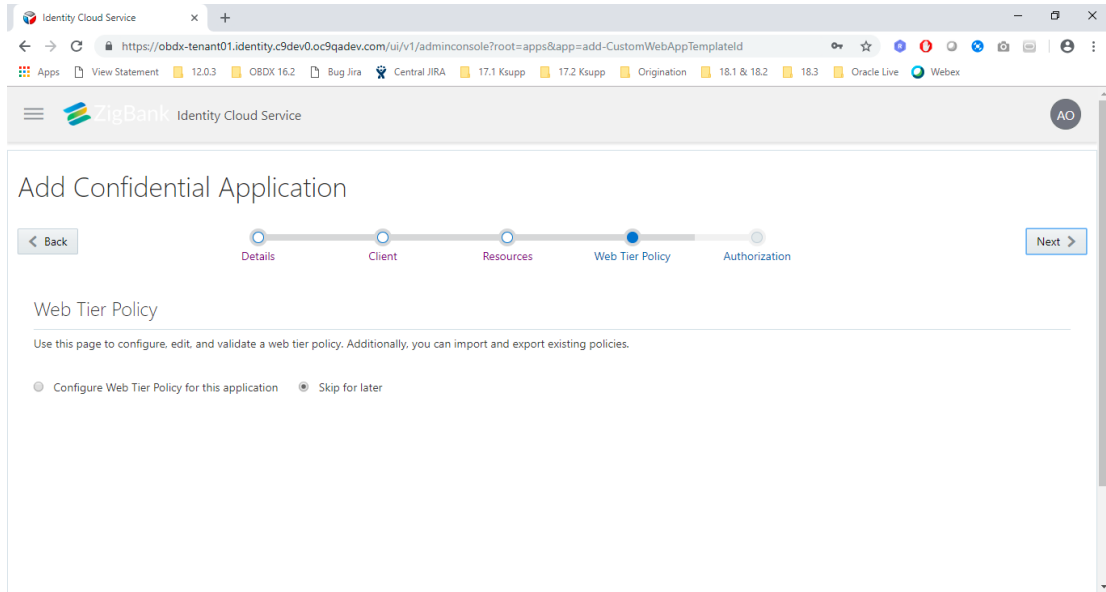

8. Click **Next**

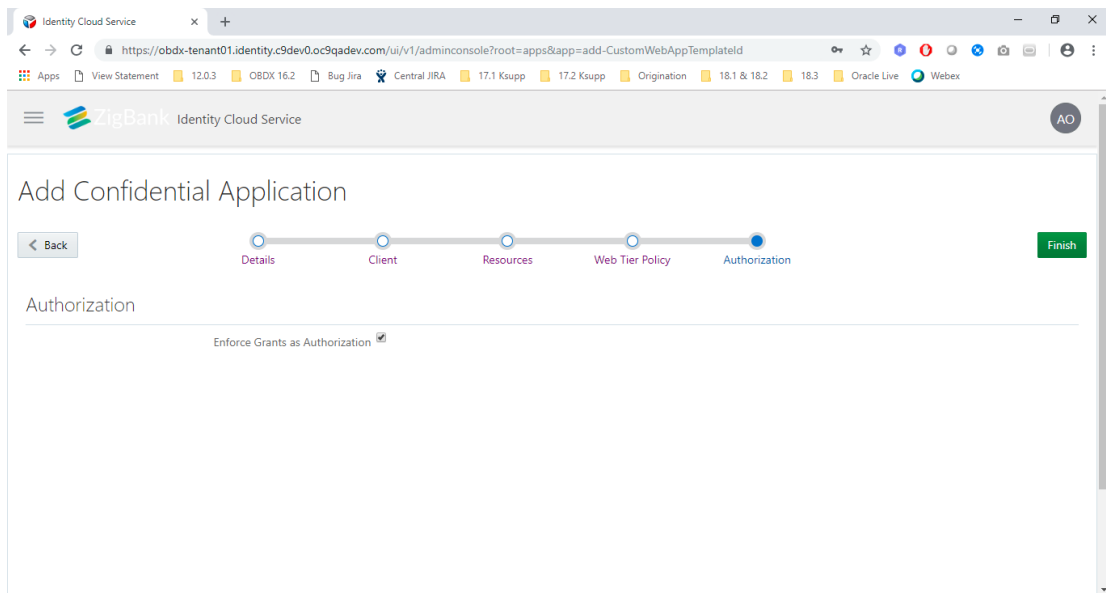


9. Click on **Finish**.

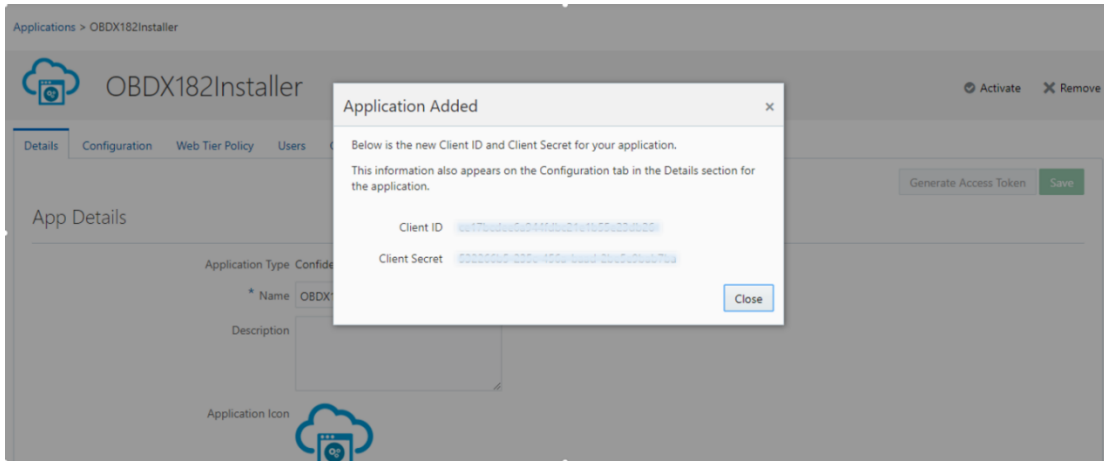

10. You will get **Client ID** and **Client Secret** on successful creation.


**Glossary of parameters:**

<client_id_of_OBDX_client_in_IDCS>	Client ID given above
<client_secret_of_OBDX_client_in_IDCS>	Client Secret given above

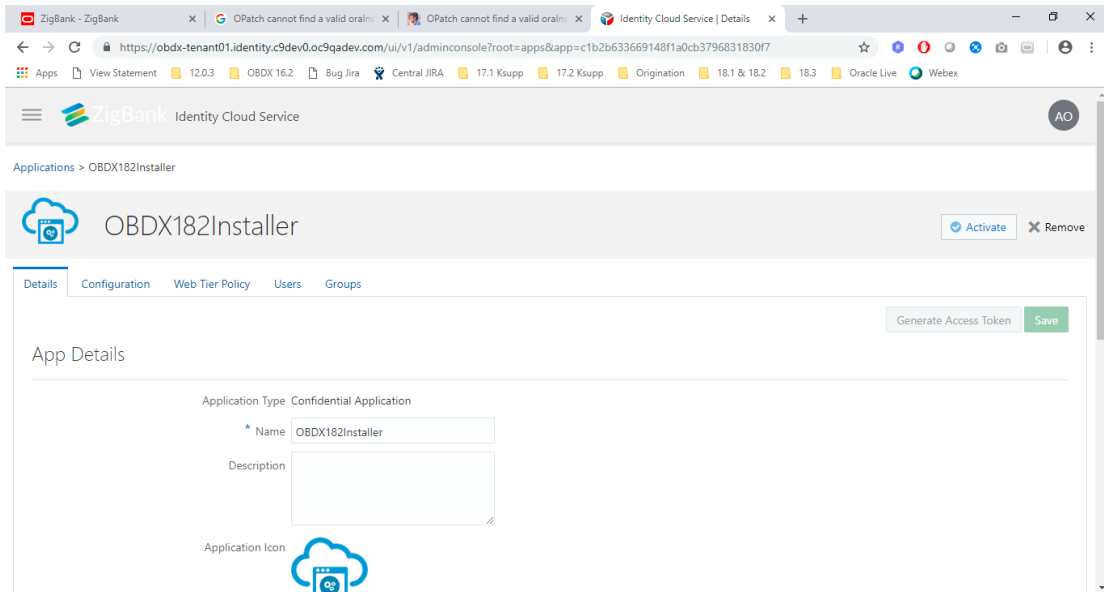


11. Click on **Activate** button.


12. Search for created application and go to **Groups** tab.

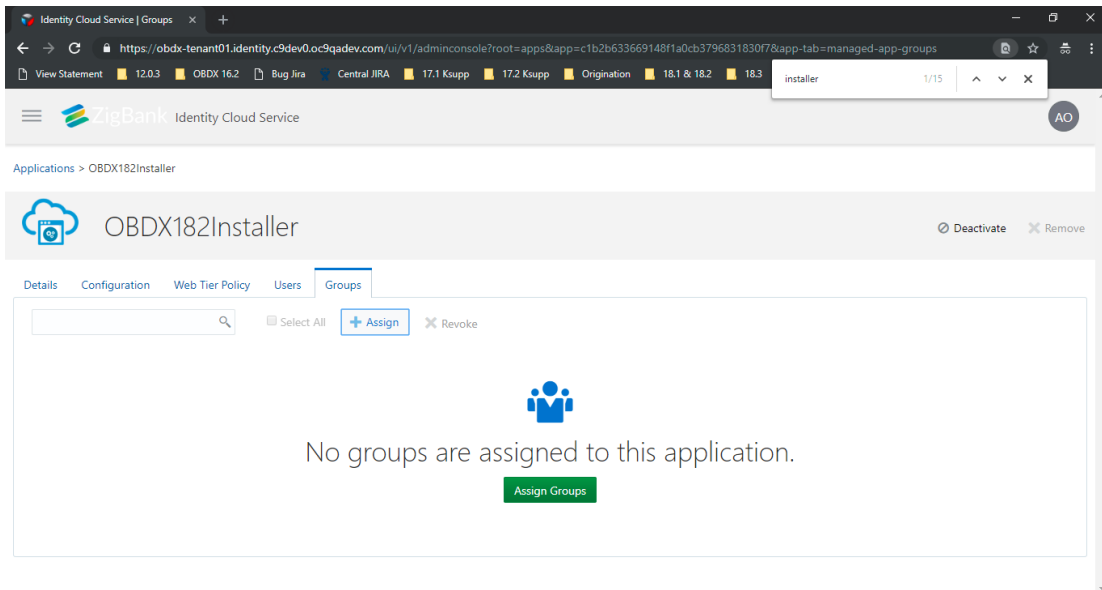

13. Click on **Assign**.

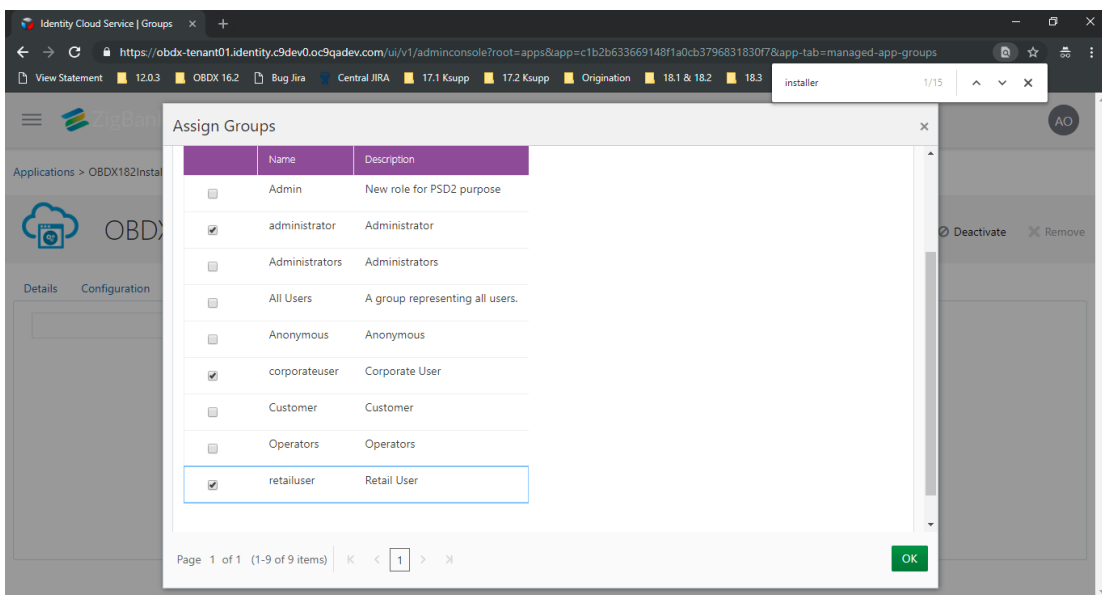

14. Click **Add**.

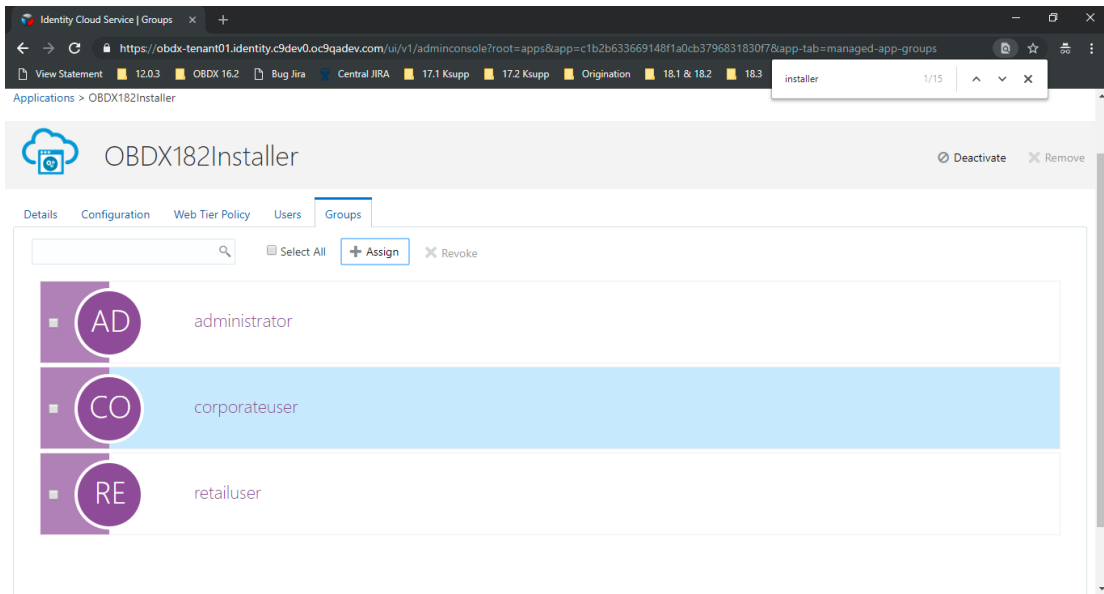

15. Above groups are added.


## 7. Configure OPSS IDCS Identity Store Service

1. Back up `jps-config-jse.xml` at [<weblogic-domain-path>/config/fmwconfig/](#)

Prepare a command property file named `opss_idcs_cmd.props`

`opss_idcs_cmd.props`:



```
command=setIdStoreService
jse.only=true
path=<weblogic-domain-path>/config/fmwconfig/jps-config-jse.xml
idstore.type=SCIM
idcs.config.url=https://<tenant-base-url>:443/.well-known/idcs-configuration
oauth.client.identity.domain=<tenant-name>
oauth.client.id=<client id of OBDX client in IDCS>
oauth.client.secret=<client secret of OBDX client in IDCS>
oauth.client.key=
oauth.client.map=
oauth.client.timeout.window=
oauth.client.scope=
scim.client.connect.timeout=
scim.client.read.timeout=
scim.pagesize=
identity.domain=
allowed.identity.domains=
idcs.config.truststore=kss://system/trust
certfile.path=
cert.alias=idcsca
```

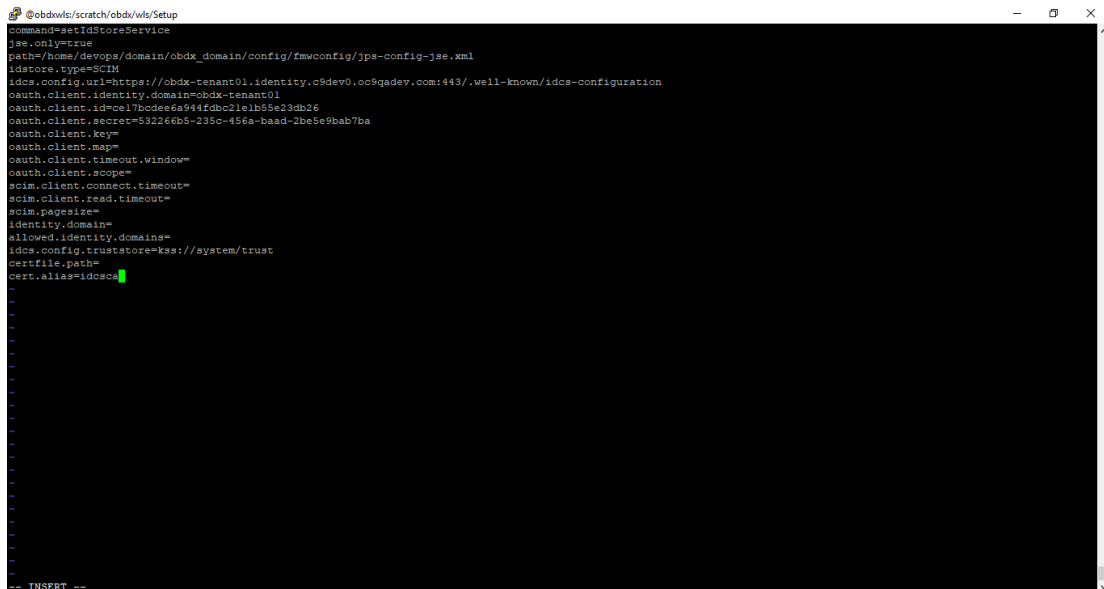

```
@obdxwls/scratch/obdx/wls/Setup
command=setIdStoreService
jse.only=true
path=/home/devops/domain/obdx_domain/config/fmwconfig/jps-config-jse.xml
idstore.type=SCIM
idcs.config.url=https://obdx-tenant01.identity.c9dev0.oc9qadev.com:443/.well-known/idcs-configuration
oauth.client.identity.domain=obdx-tenant01
oauth.client.id=ce17bcdee6a944fdbc21eb55e23db26
oauth.client.secret=532266b5-235c-456a-baad-2be5e9bab7ba
oauth.client.key=
oauth.client.map=
oauth.client.timeout.window=
oauth.client.scope=
scim.client.connect.timeout=
scim.client.read.timeout=
scim.pagesize=
identity.domain=
allowed.identity.domains=
idcs.config.truststore=kss://system/trust
certfile.path=
cert.alias=idcsca
-- INSERT --
```



4. Login to weblogic Enterprise Manager (EM) and Import this certificate in EM as 'idcsca' under kss://system/trust.

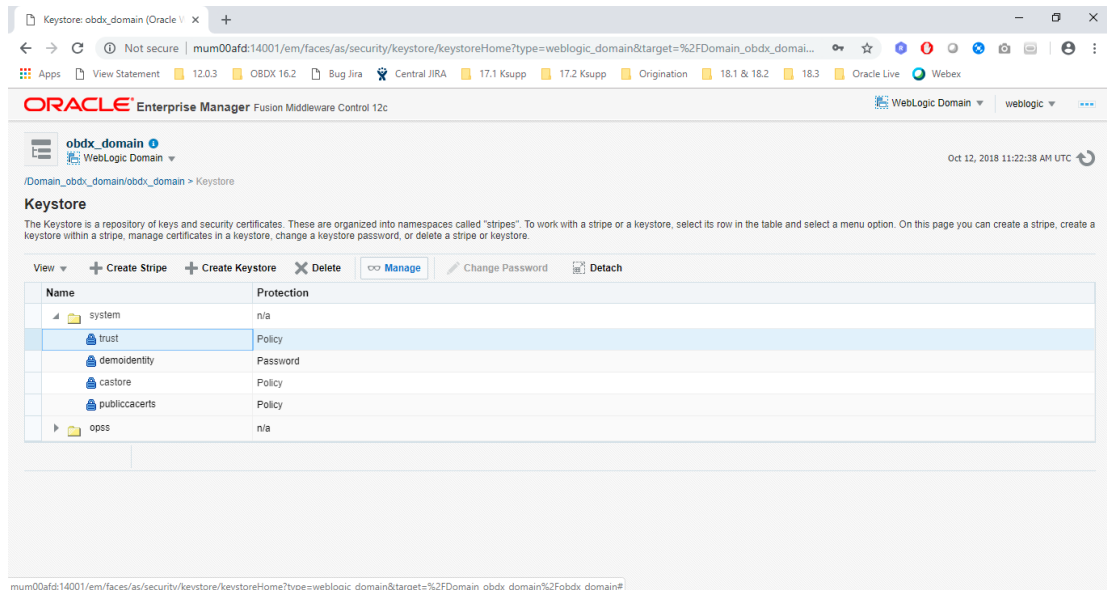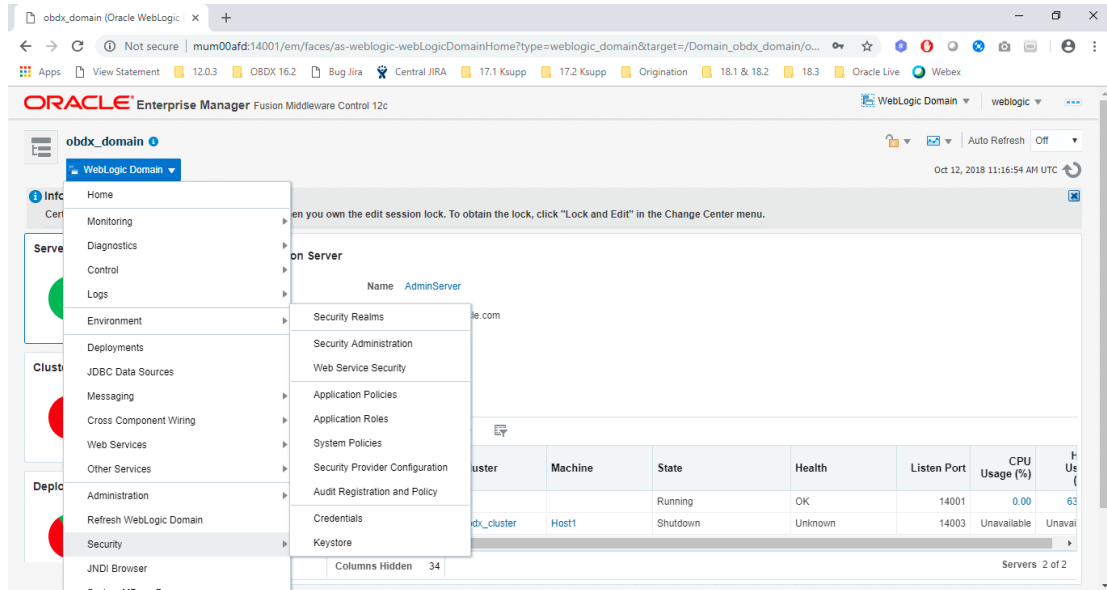

The screenshot shows the 'Manage Certificates: system/trust' page in Oracle Enterprise Manager. The page title is 'obdx\_domain' and the breadcrumb is '/Domain\_obdx\_domain/obdx\_domain > Keystore > Manage Certificates'. Below the title is a table of certificates:

Alias	Subject Name	Certificate Type	Serial Number	Certificate SHA1 Fingerprint	Expiration Date
democa	CN=CertGenCA,OU=FOR TESTING ONLY,O=MyOrganization,L=MyTown,ST=MyState,C=US	Trusted Certificate	0x643a8066409...	ca 61 71 5b 64 6b 2 63 c6 fb 83 b1 71 f0 99 d3 54 6a ...	December 2, 2032
olddemoca	CN=CertGenCAB,OU=FOR TESTING ONLY,O=MyOrganization,L=MyTown,ST=MyState,C=US	Trusted Certificate	0xf5c82bdf603...	f8 5d 49 a4 12 54 78 c7 ba 42 a7 14 3e 6 f5 1e a0 d4 ...	October 25, 2022

Below the table are buttons for 'Generate Keypair', 'Generate CSR', 'Import', 'Export', 'Delete', 'Change Password', and 'Detach'. The 'Import' button is highlighted.

The screenshot shows the 'Import Certificate' dialog box. The 'Certificate Type' is set to 'Trusted Certificate'. The 'Alias' is 'idcsca'. The 'Certificate Source' is 'Paste Certificate or Certificate Chain'. There is a text area for 'Paste Certificate String here'. Below that, there is a radio button for 'Select a file that contains the Certificate or Certificate Chain'. The 'File Name' is 'idcsca.cer'. A tooltip says 'Choose File containing a valid certificate.' There are 'OK' and 'Cancel' buttons at the bottom.



Information  
Trusted Certificate imported successfully.



/Domain\_obdx\_domain/obdx\_domain > Keystore > Manage Certificates



**Manage Certificates: system/trust**

To generate a new key pair (public and private key) and wrap the public key into a certificate signed by the Demo CA, click "Generate Keypair". To generate a Certificate Signing Request (CSR), select a certificate from table and click "Generate CSR". After you create a CSR, send it to your CA who will verify your identity and return the signed certificate. To import the CA signed certificate or trusted cert, click Import. You can only import the CA-signed certificate into the same keystore from which the CSR was generated.


Alias	Subject Name	Certificate Type	Serial Number	Certificate SHA1 Fingerprint	Expiration Date
democa	CN=CertGenCA,OU=FOR TESTING ONLY,O=MyOrganization,L=MyTown,ST=MyState,C=US	Trusted Certificate	0x643a8066409...	ca 61 71 5b 64 6b 2 63 c6 fb 83 b1 71 f0 99 d3 54 6a ...	December 2, 2032
olddemoca	CN=CertGenCAB,OU=FOR TESTING ONLY,O=MyOrganization,L=MyTown,ST=MyState,C=US	Trusted Certificate	0xf5c82b0fed03...	f8 5d 49 a4 12 54 78 c7 b8 42 a7 14 3e 6 f5 1e a0 d4 ...	October 25, 2022
idcsca	CN=identity.c9dev0.oc9qadev.com,OU=Oracle BMD SALT-LAKE-CITY,O=Oracle Corporation,L=Re...	Trusted Certificate	0x9db0b3389e5...	61 81 8e 35 4a d8 25 62 c bf f2 c4 ff 91 26 bb ad 8e 3...	March 8, 2019

## 8. Adding IDCS as an Identity Provider in Weblogic Security Realms

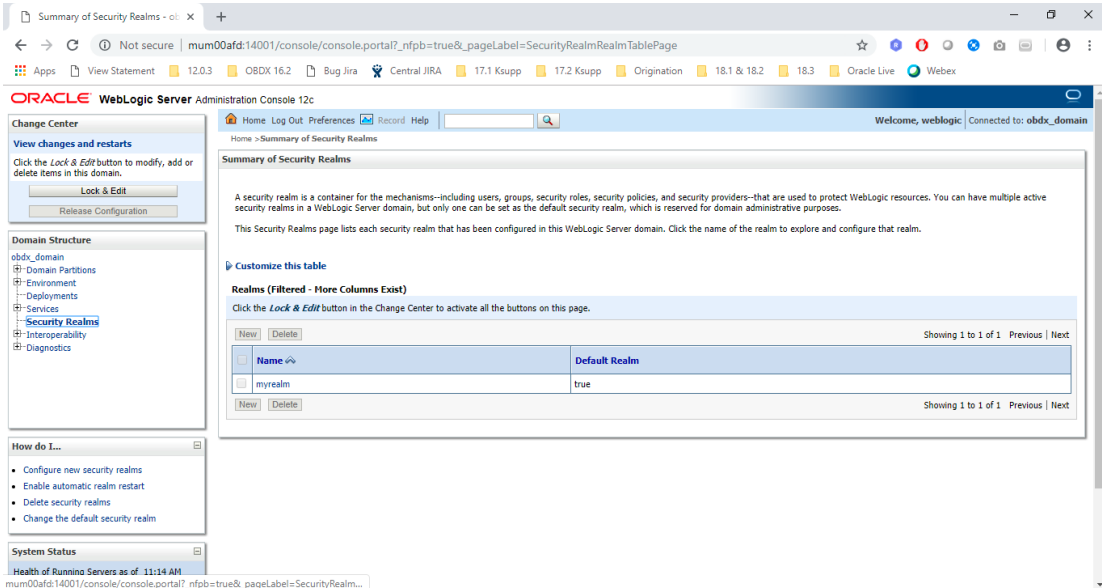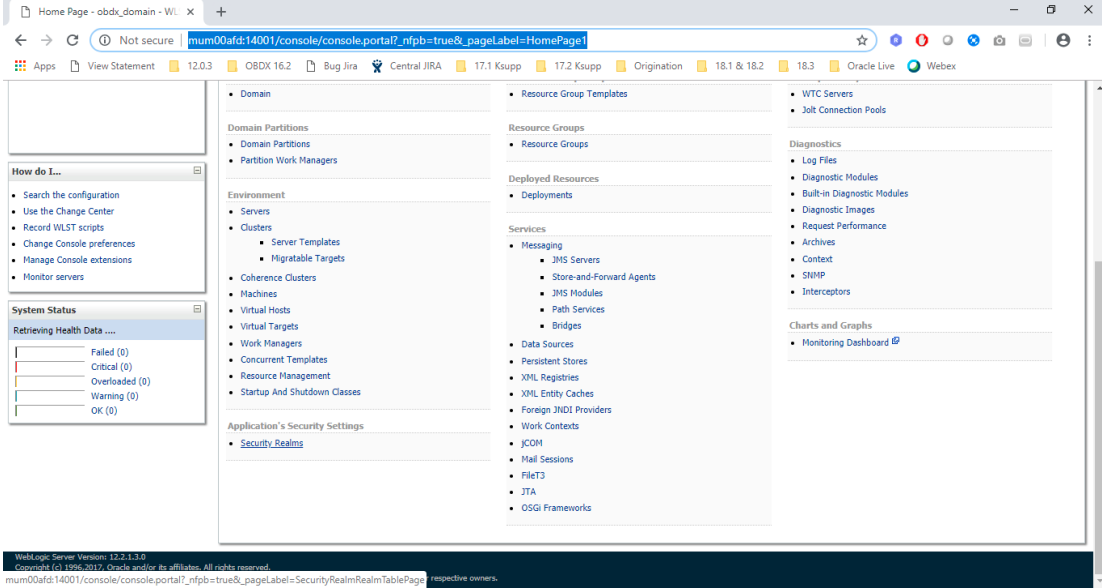

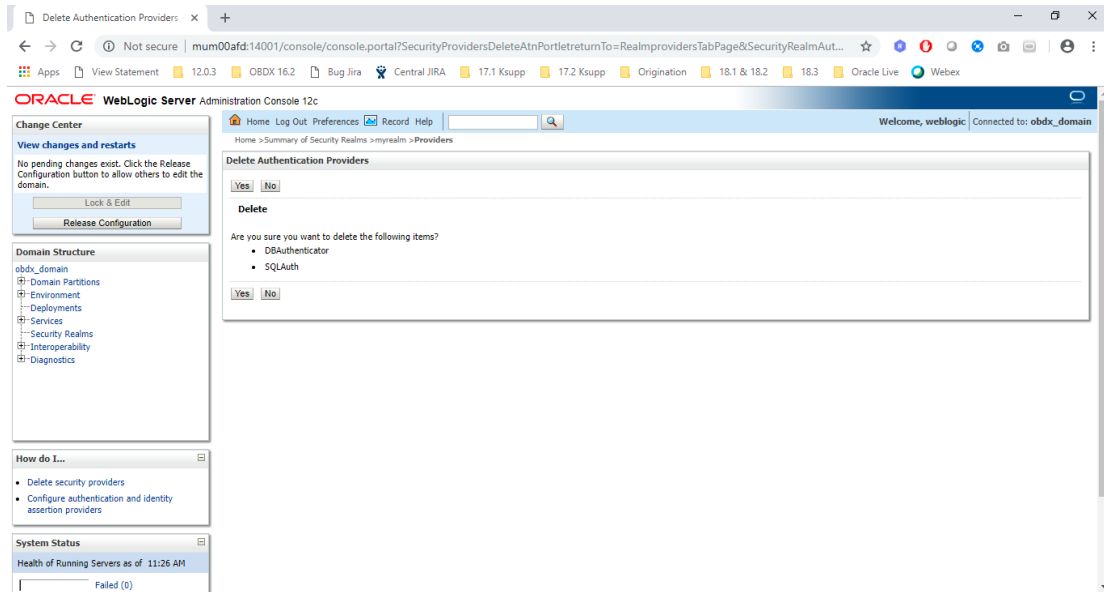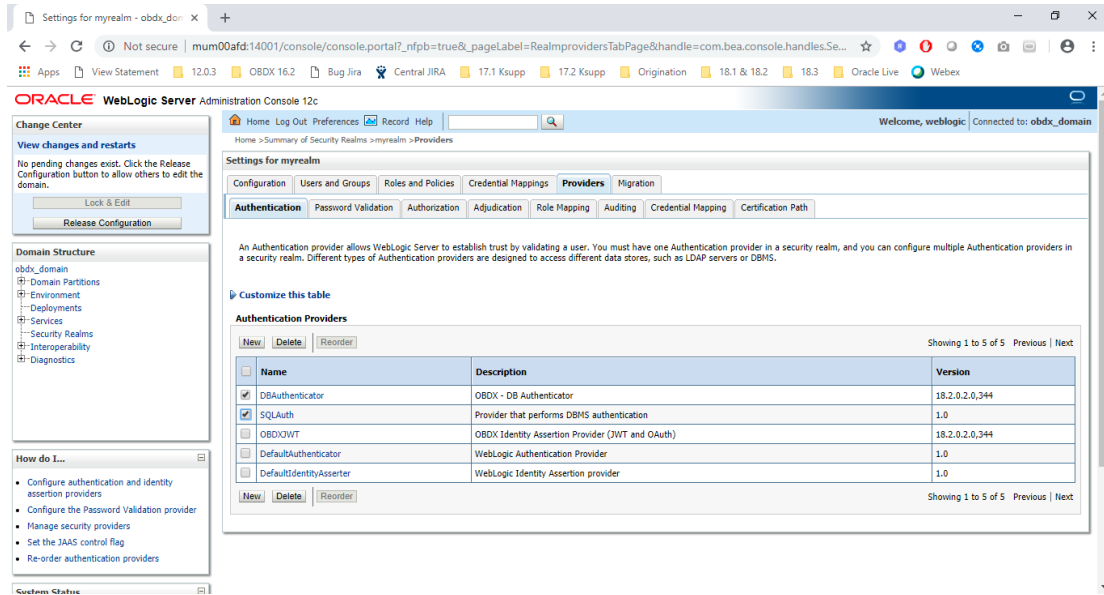


1. Delete *DBAuthenticator* and *SQLAuth* from the list of Authenticator Providers.
2. Create a New Provider.
  - Name : *IDCSAuthenticator*
  - Type : *OracleIdentityCloudIntegrator*

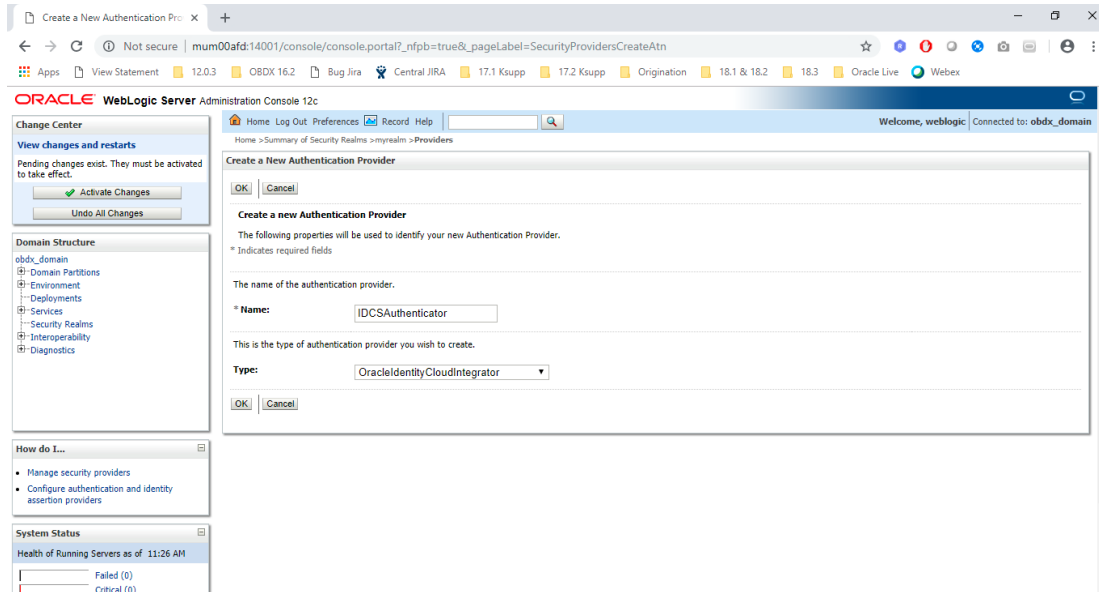


### 3. IDCSAuthenticator > Configurations > Common


- Control Flag: SUFFICIENT
- Active Types:
  - i. Available: Idcs\_user\_assertion
  - ii. Chosen: idcs\_user\_assertion, Authorization, IDCS\_REMOTE\_USER, REMOTE\_USER

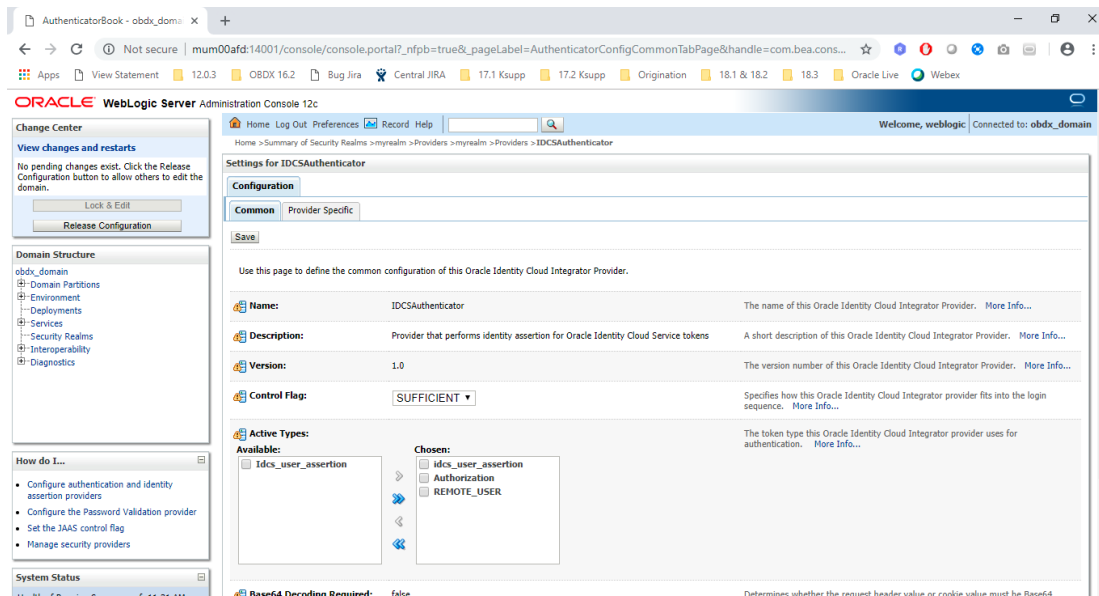


### 4. IDCSAuthenticator > Configurations > Provider Specific

- Port: 443
- Tenant Names: [<tenant name>](#)
- SSLEnabled: *True*
- Client IDResource Attribute: *client\_id*
- Client Id: [<client ID of OBDX client in IDCS>](#)
- Client Tenant: [<tenant name>](#)
- Tenant: [<tenant name>](#)
- Host: [<base-url>](#)
- Client Secret: [<client secret of OBDX client in IDCS>](#)

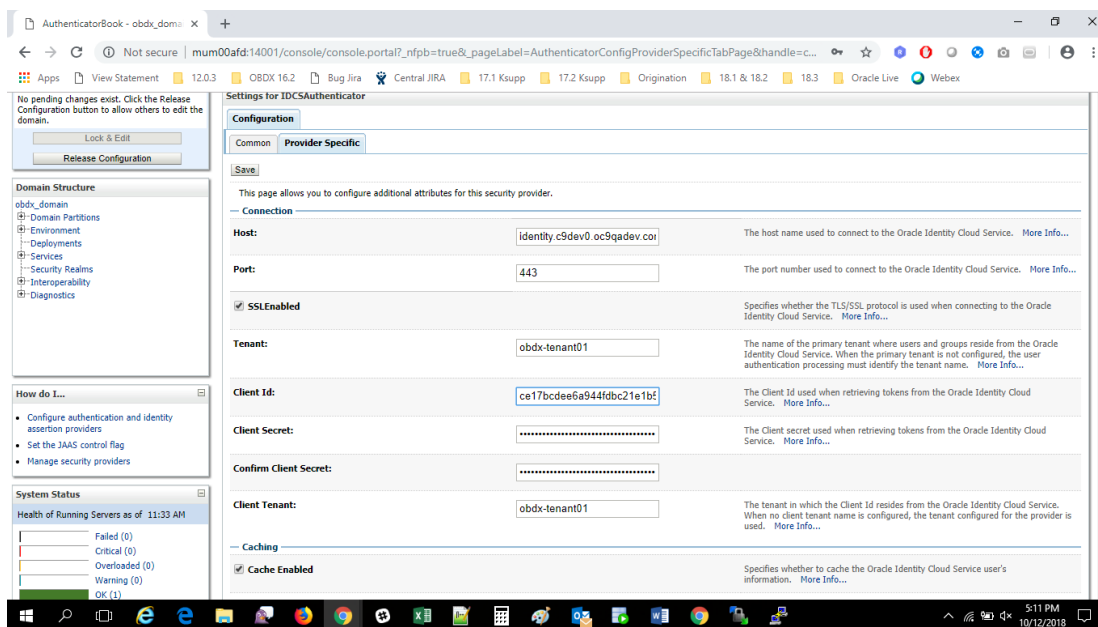

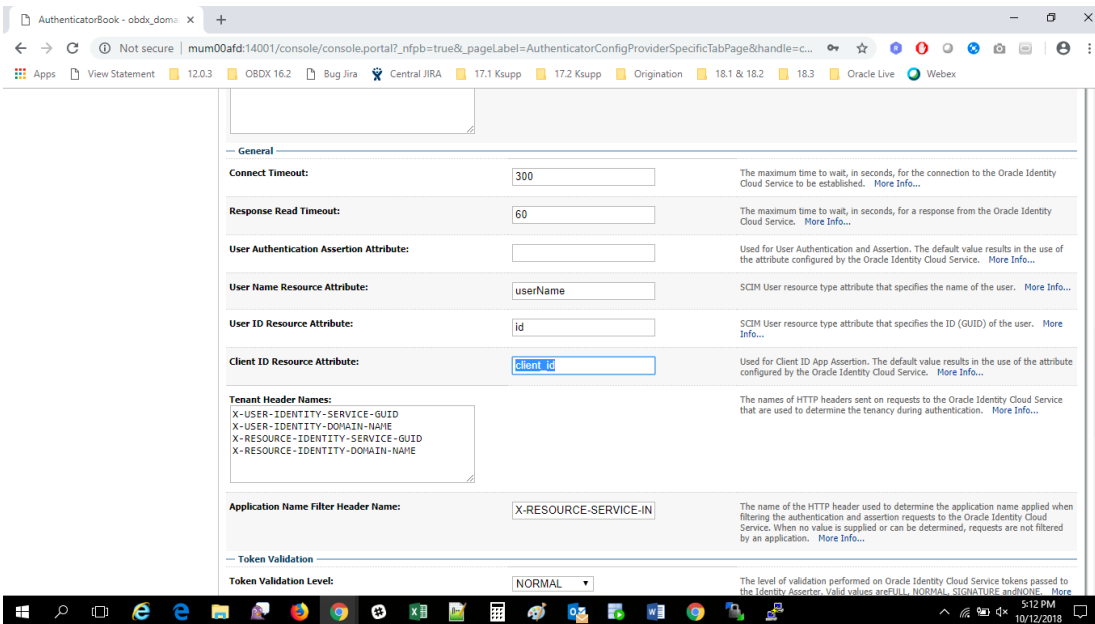

5. Reorder IDCSAuthenticator to the top of all providers.

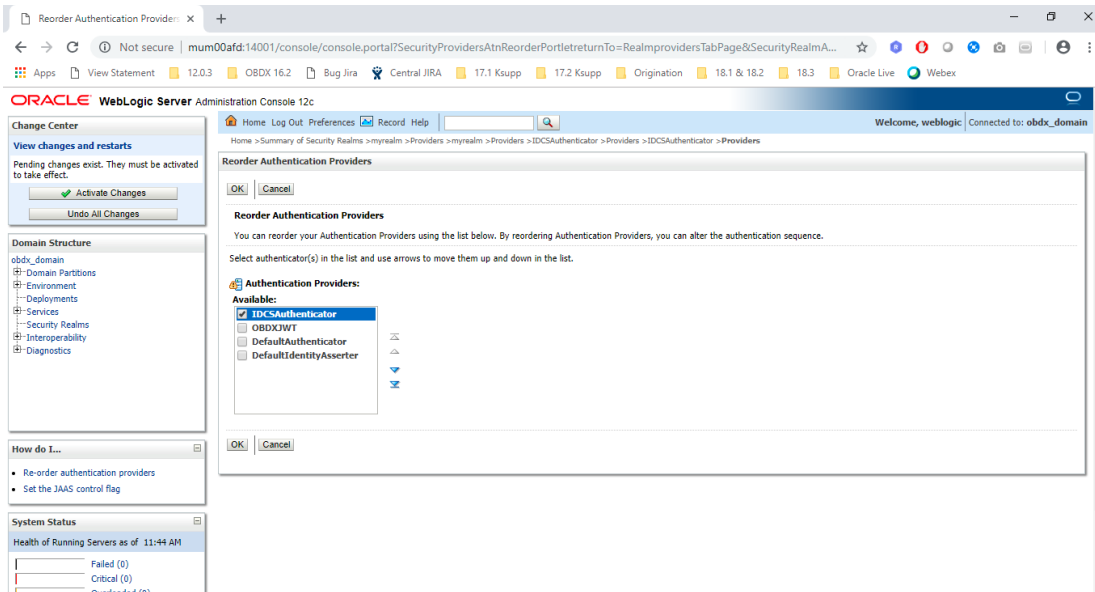

The screenshot shows the Oracle WebLogic Server Administration Console interface. The main content area is titled "Settings for myrealm" and is under the "Providers" tab. A message at the top states: "All changes have been activated. However 1 items must be restarted for the changes to take effect." Below this, there are tabs for "Authentication", "Password Validation", "Authorization", "Adjudication", "Role Mapping", "Auditing", "Credential Mapping", and "Certification Path".

The "Authentication Providers" section contains a table with the following data:

Name	Description	Version
IDCSAuthenticator	Provider that performs identity assertion for Oracle Identity Cloud Service tokens	1.0
OBDXJWT	OBDX Identity Assertion Provider (JWT and OAuth)	18.2.0.2.0.344
DefaultAuthenticator	WebLogic Authentication Provider	1.0
DefaultIdentityAsserter	WebLogic Identity Assertion provider	1.0

On the left side of the console, there is a "Change Center" section with "View changes and restarts" and "Lock & Edit" buttons. Below that is the "Domain Structure" tree showing the hierarchy: obdx\_domain > Domain Partitions > Environment > Deployments > Services > Security Realms > Interoperability > Diagnostics. At the bottom left, there is a "How do I..." section with links to various configuration topics.

## 9. Application Server Changes

### 9.1 Add below argument to Managed server:

Dweblogic.security.SSL.hostnameVerifier=weblogic.security.util.SSLWLSWildcardHostnameVerifier

The screenshot shows the Oracle WebLogic Administration Console interface. On the left, there is a navigation pane with sections for 'Security Realms', 'Interoperability', 'Diagnostics', 'How do I...', and 'System Status'. The 'System Status' section shows the health of running servers as of 11:46 AM, with a bar chart indicating 0 Failed, 0 Critical, 0 Overloaded, 0 Warning, and 1 OK servers. The main content area displays configuration fields for a managed server, including Java Vendor, BEA Home, Root Directory, Class Path, Arguments, Security Policy File, User Name, and Password. The 'Arguments' field is highlighted with a blue box and contains the following command:

```
-Dfcst.jvm.id=1 -Xms2560m -Xmx2560m -XX:NewSize=640m -XX:MaxNewSize=640m -Dcom.sun.xml.internal.ws.transport.http.HttpAdapter.dump=true -Dcom.sun.xml.internal.ws.transport.http.HttpTransportPipe.dump=true -Dcom.sun.xml.ws.transport.http.client.HttpTransportPipe.dump=true -Dcom.sun.xml.ws.transport.http.HttpAdapter.dump=true -Dcom.sun.xml.ws.transport.http.HttpAdapter.dumpThreshold=999999 -Xdebug -Xnoagent -XrunIdio:transport=dt_socket,server=y,address=10443,suspend=n -Dweblogic.security.SSL.hostnameVerifier=weblogic.security.util.SSLWLSWildcardHostnameVerifier
```



## 9.2 Managed Server Start Configurations

1. Go to Home > Summary of Clusters > obdx\_cluster > Configuration Tab > General Tab >
2. Expand **Advanced** Section.
3. Set the Value of **WebLogic Plug-In Enabled** to **yes**.

The screenshot shows the Oracle WebLogic Administration Console interface. The browser address bar indicates the URL: `mum00afd:14001/console/console.portal?_nfpb=true&_pageLabel=CoreClusterClusterConfigGeneralPage&CoreClusterClusterCo...`. The page title is "Settings for obdx\_cluster".

The left sidebar contains several panels:

- View changes and restarts:** Shows "No pending changes exist. Click the Release Configuration button to allow others to edit the domain." with "Lock & Edit" and "Release Configuration" buttons.
- Domain Structure:** A tree view showing the hierarchy: obdx\_domain > Domain Partitions > Environment > Servers > Clusters > Coherence Clusters > Resource Groups > Resource Group Templates > Machines > Virtual Hosts > Virtual Targets > Work Managers > Concurrent Templates > Resource Management.
- How do I...:** A list of links: "Configure clusters", "Assign server instances to clusters", "Configure server migration in a cluster", "Configure cross-cluster replication".
- System Status:** Shows "Health of Running Servers as of 2:58 PM" with a bar chart for "Failed (0)", "Critical (0)", and "Overloaded (0)".

The main content area is titled "Settings for obdx\_cluster" and has tabs for "Configuration", "Monitoring", "Control", "Deployments", "Services", and "Notes". The "Configuration" tab is active, and the "General" sub-tab is selected. A "Save" button is visible at the top left of the configuration area.


The configuration details include:

- Name:** obdx\_cluster
- Default Load Algorithm:** round-robin
- Cluster Address:** (empty text field)
- Number of Servers in Cluster Address:** 3
- Enable Transaction Affinity:** (unchecked checkbox)
- Enable Concurrent Single Activation:** (unchecked checkbox)
- Advanced Section:**
  - WebLogic Plug-In Enabled:** yes (dropdown menu)


## 10. Change in Weblogic Deployments

### 10.1 Creating a Connection in Connector ear

1. Start the managed server if it is down.
2. Summary of Deployments > com.ofss.digx.connector.rar > Security > Outbound Credential Mappings

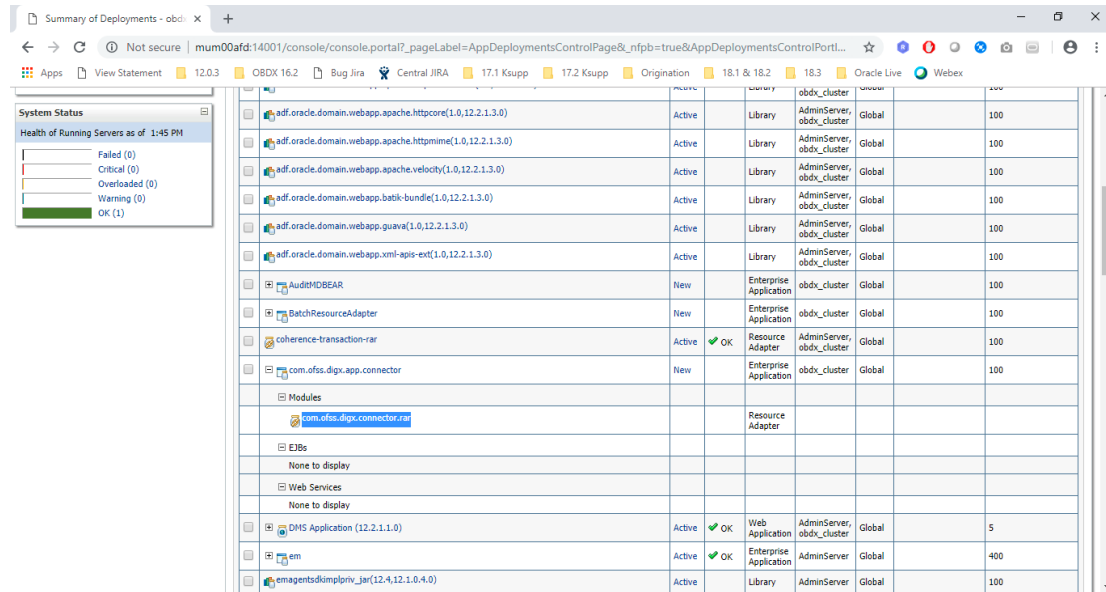

Name	Status	Type	Resource Adapter	Global	Instances
adf.oracle.domain.webapp.apache.httcore(1.0,12.2.1.3.0)	Active	Library	AdminServer, obdx_cluster	Global	100
adf.oracle.domain.webapp.apache.httpmime(1.0,12.2.1.3.0)	Active	Library	AdminServer, obdx_cluster	Global	100
adf.oracle.domain.webapp.apache.velocity(1.0,12.2.1.3.0)	Active	Library	AdminServer, obdx_cluster	Global	100
adf.oracle.domain.webapp.batik-bundle(1.0,12.2.1.3.0)	Active	Library	AdminServer, obdx_cluster	Global	100
adf.oracle.domain.webapp.guava(1.0,12.2.1.3.0)	Active	Library	AdminServer, obdx_cluster	Global	100
adf.oracle.domain.webapp.xml-apis-ext(1.0,12.2.1.3.0)	Active	Library	AdminServer, obdx_cluster	Global	100
AuditMDBEAR	New	Enterprise Application	obdx_cluster	Global	100
BatchResourceAdapter	New	Enterprise Application	obdx_cluster	Global	100
coherence-transaction-rar	Active	Resource Adapter	AdminServer, obdx_cluster	Global	100
com.ofss.digx.app.connector	New	Enterprise Application	obdx_cluster	Global	100
Modules					
com.ofss.digx.connector.rar		Resource Adapter			
EJBs					
None to display					
Web Services					
None to display					
DMS Application (12.2.1.1.0)	Active	Web Application	AdminServer, obdx_cluster	Global	5
em	Active	Enterprise Application	AdminServer	Global	400
emagentdimplpriv_jar(12.4.12.1.0.4.0)	Active	Library	AdminServer	Global	100

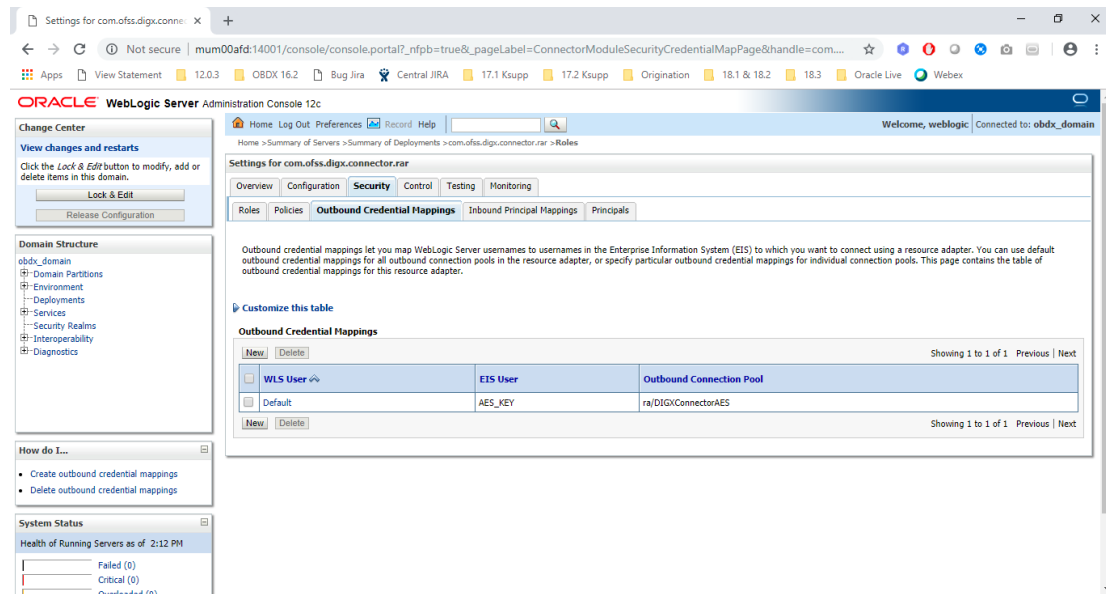

Settings for com.ofss.digx.connector.rar


Roles Policies **Outbound Credential Mappings** Inbound Principal Mappings Principals

Outbound credential mappings let you map WebLogic Server usernames to usernames in the Enterprise Information System (EIS) to which you want to connect using a resource adapter. You can use default outbound credential mappings for all outbound connection pools in the resource adapter, or specify particular outbound credential mappings for individual connection pools. This page contains the table of outbound credential mappings for this resource adapter.


Customize this table

WLS User	EIS User	Outbound Connection Pool
Default	AES_KEY	ra/DIGXConnectorAES

3. Click New

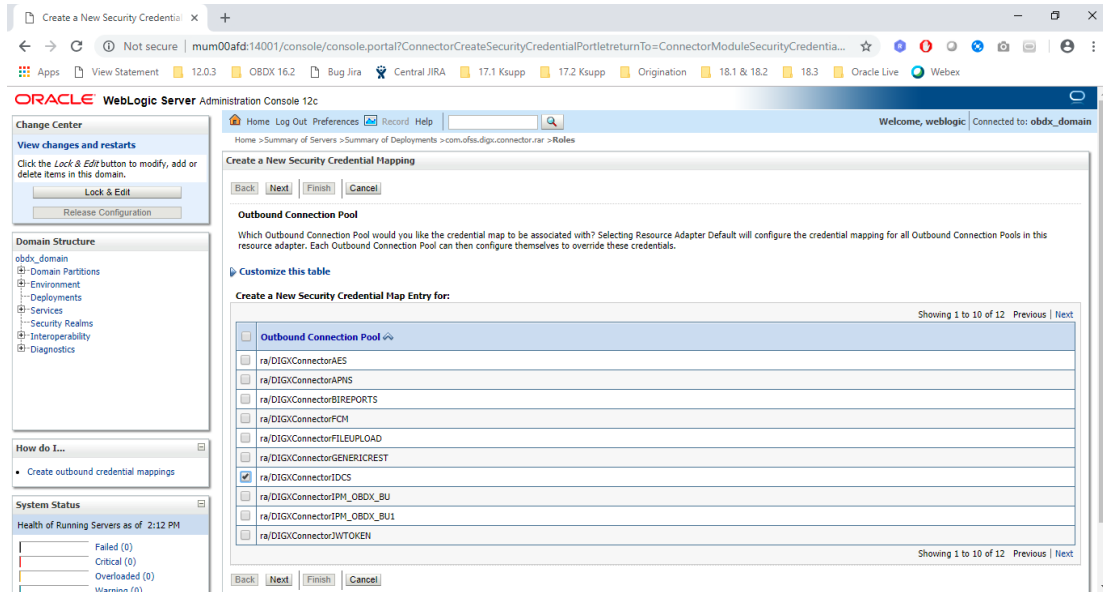


#### 4. Click Next

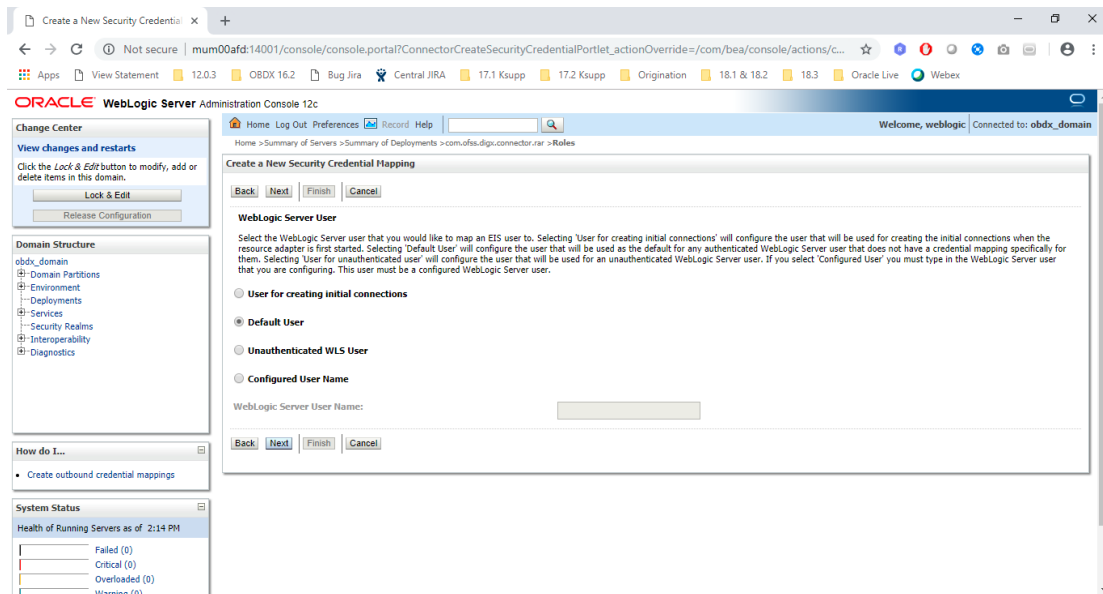

#### 5. Click Next


#### 6. Create a new Security Credential Mapping –


- Outbound Connection Pool: **ra/DIGXConnectorIDCS**
- WebLogic Server User: **Default**
- EIS User Name: <client id of OBDX client in IDCS>
- EIS Password: <client secret of OBDX client in IDCS>

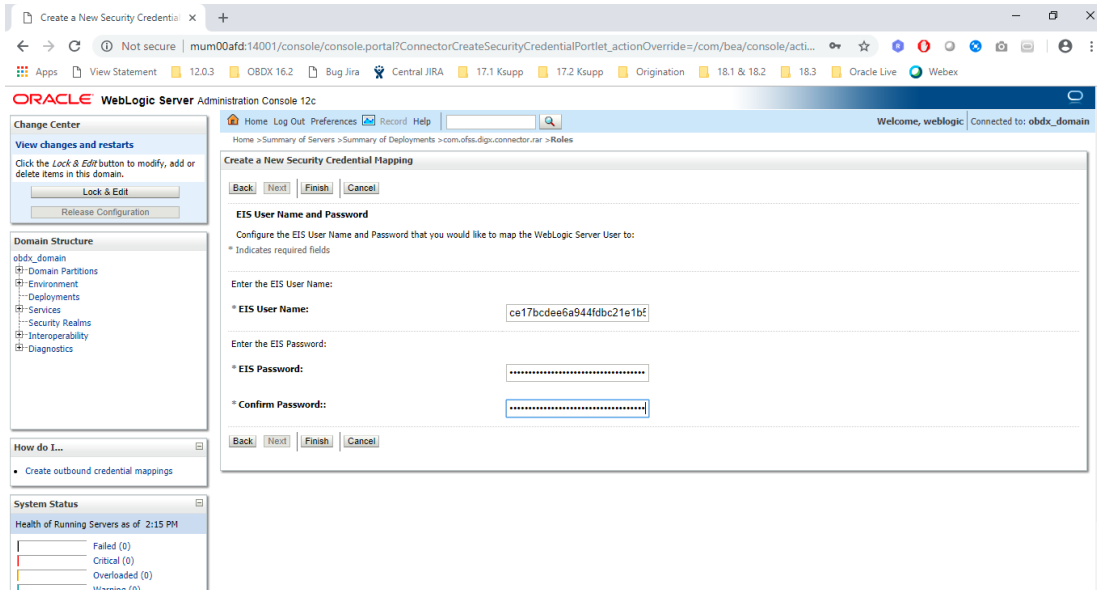

7. Click Finish

- a. Delete **obdx.app.rest.idm.ear** and install deployment **obdx.app.rest.ear** from <Installer\_Path>\OBDX\_Patch\_Installer\installables\app\components\obdx\deploy\obdx.app.rest.ear in **Installer.zip**.

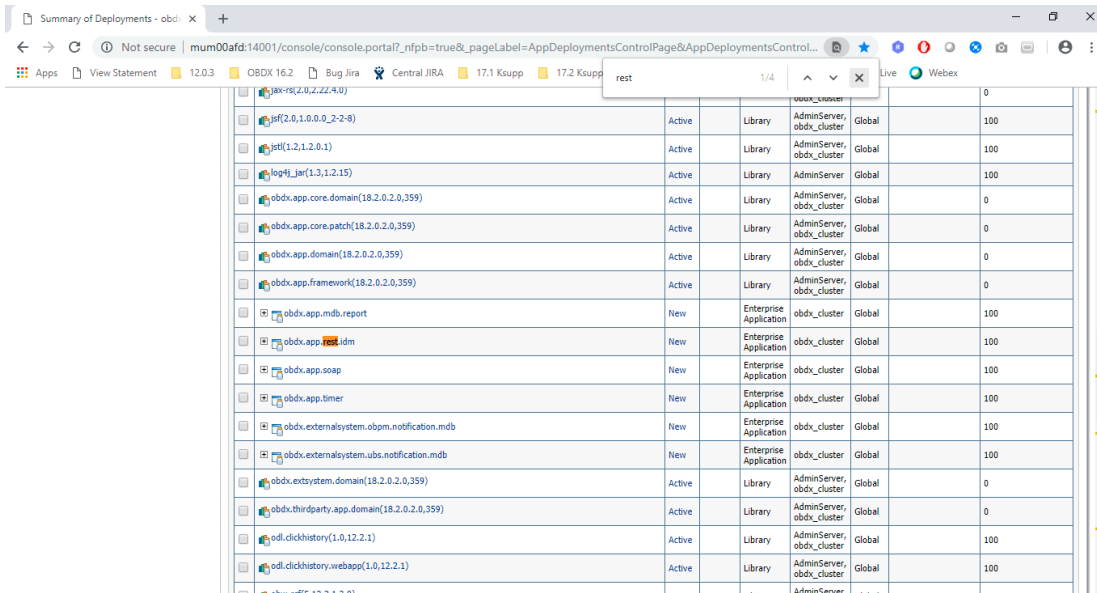


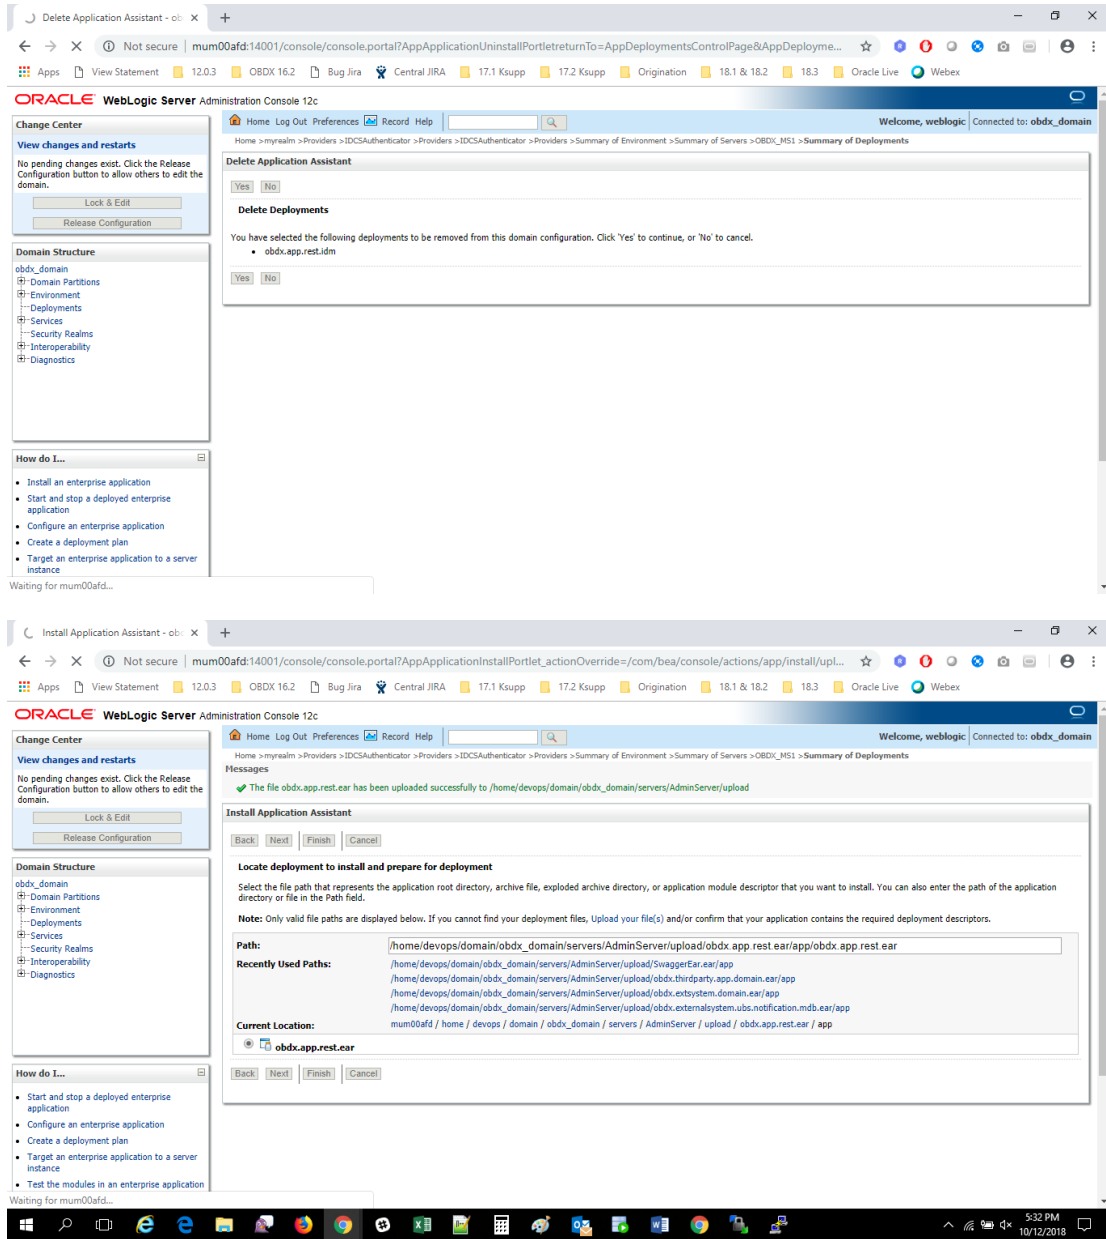

## 11. Create Client Applications for Internal OBDX Apps in IDCS Console

Client applications need to be created for below Internal applications.

- Mobile App
- Siri Chatbot
- Snapshot
- Wearable

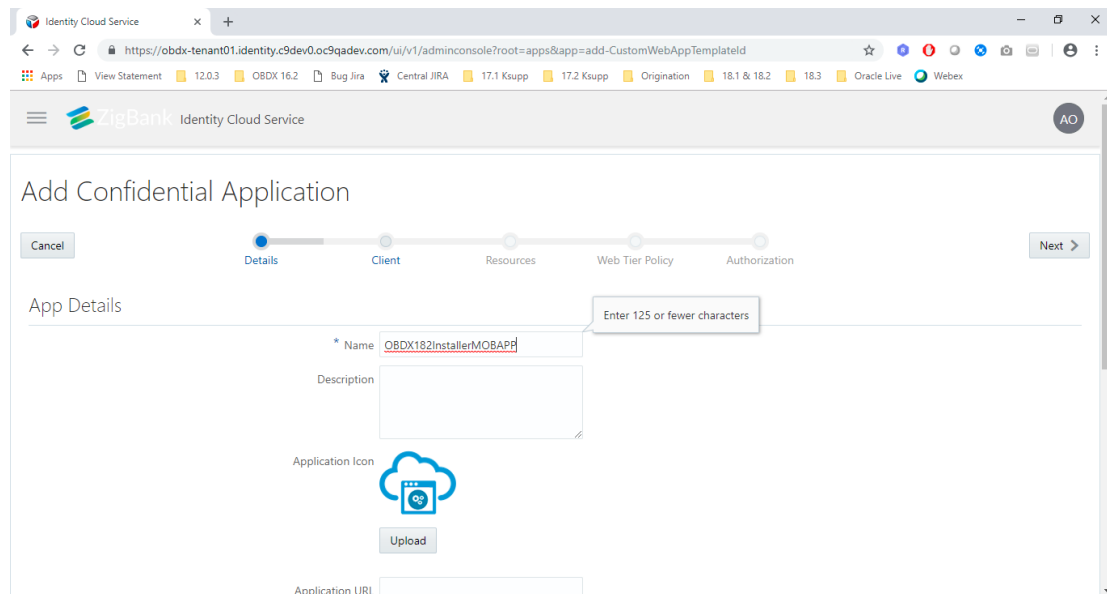



The screenshot displays the 'Add Confidential Application' wizard in the Identity Cloud Service console. The wizard is currently on the 'Details' step, with a progress bar showing the sequence: Details, Client, Resources, Web Tier Policy, and Authorization. The 'Name' field is populated with 'OBDX182InstallerMOBAPP', and a tooltip above it states 'Enter 125 or fewer characters'. The 'Description' field is empty. The 'Application Icon' field shows a default icon of a cloud with a plus sign and a minus sign, with an 'Upload' button below it. The 'Application URL' field is also empty. The browser's address bar shows the URL: <https://obdx-tenant01.identity.c9dev0.oc9qadev.com/ui/v1/adminconsole?root=apps&app=add-CustomWebAppTemplateId>. The browser's tab is titled 'Identity Cloud Service'.

The screenshot shows the 'Add Confidential Application' page in the IDCS console. The breadcrumb trail is 'Details' > 'Client' > 'Resources' > 'Web Tier Policy' > 'Authorization'. The 'Client' step is currently active. The 'Authorization' section is titled 'Authorization' and includes the following options:


- Allowed Grant Types:  Resource Owner,  Client Credentials,  JWT Assertion,  SAML2 Assertion,  Refresh Token,  Authorization Code
- Implicit,  Device Code
- Allow non-HTTPS URLs:
- Redirect URL:
- Logout URL:
- Post Logout Redirect URL:
- Security:  Trusted Client,  Certificate,
- Allowed Operations:  Introspect,  On behalf Of

The screenshot shows the 'Add Confidential Application' page in the IDCS console. The breadcrumb trail is 'Details' > 'Client' > 'Resources' > 'Web Tier Policy' > 'Authorization'. The 'Resources' step is currently active. The 'Expose APIs to Other Applications' section is titled 'Expose APIs to Other Applications' and includes the following options:

- Specify the APIs that need to be protected.
- Configure this application as a resource server now:  Skip for later:
- Configure application APIs that need to be OAuth protected
- Access Token Expiration: 3,600 seconds
- Is Refresh Token Allowed:
- Refresh Token Expiration: 604,800 seconds
- Primary Audience: OBDX182InstallerMOBAPP
- Secondary Audiences:  Add
- Secondary Audience: Protected
- No data to display.

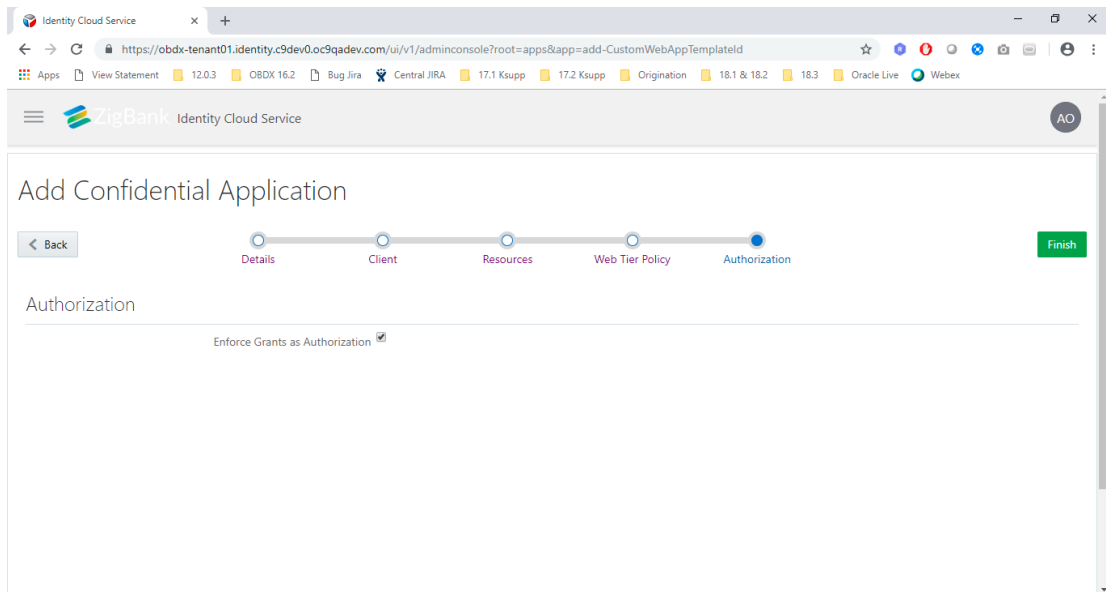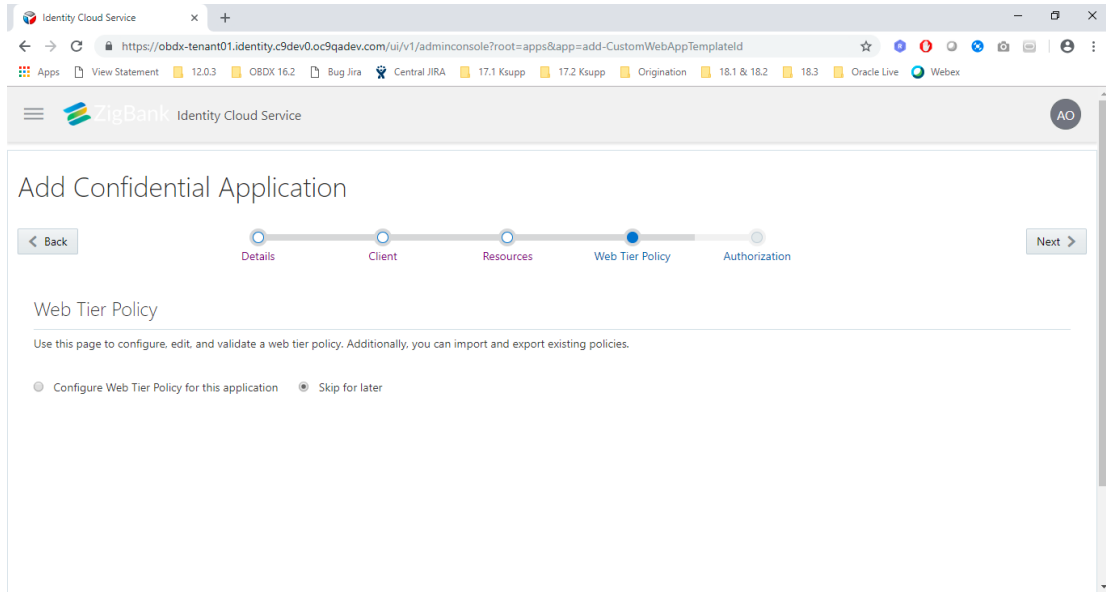




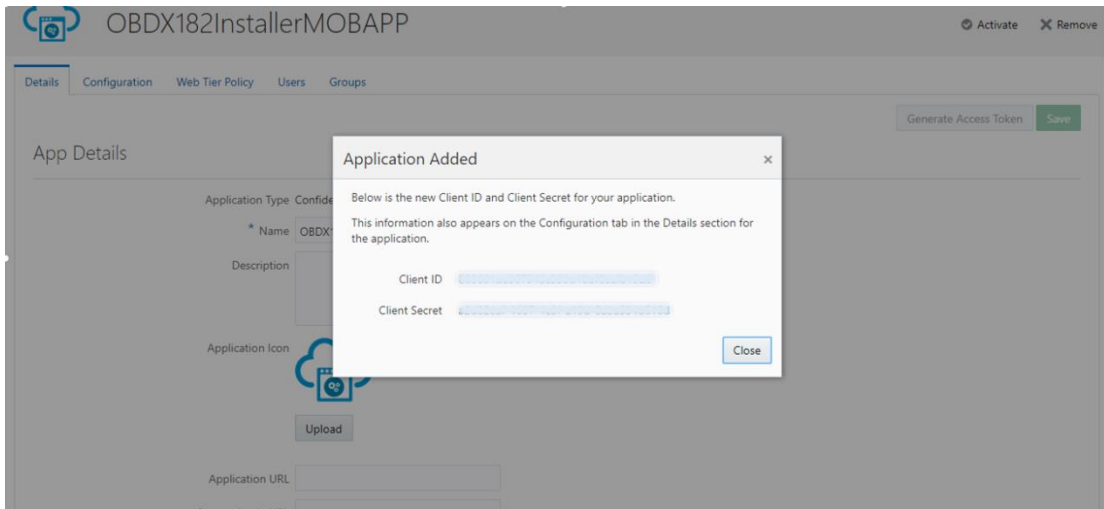

**Glossary of parameters:**

<client_id_of_SNAPSHOT_client>	Client Id of Snapshot app created in IDCS
<client_id_of_MobileApp_client>	Client Id of Mobile app created in IDCS created above
<client_id_of_SIRICHATBOT_client>	Client Id of Siri chatbot app created in IDCS
<client_id_of_WEARABLE_client>	Client Id of Wearable app created in IDCS

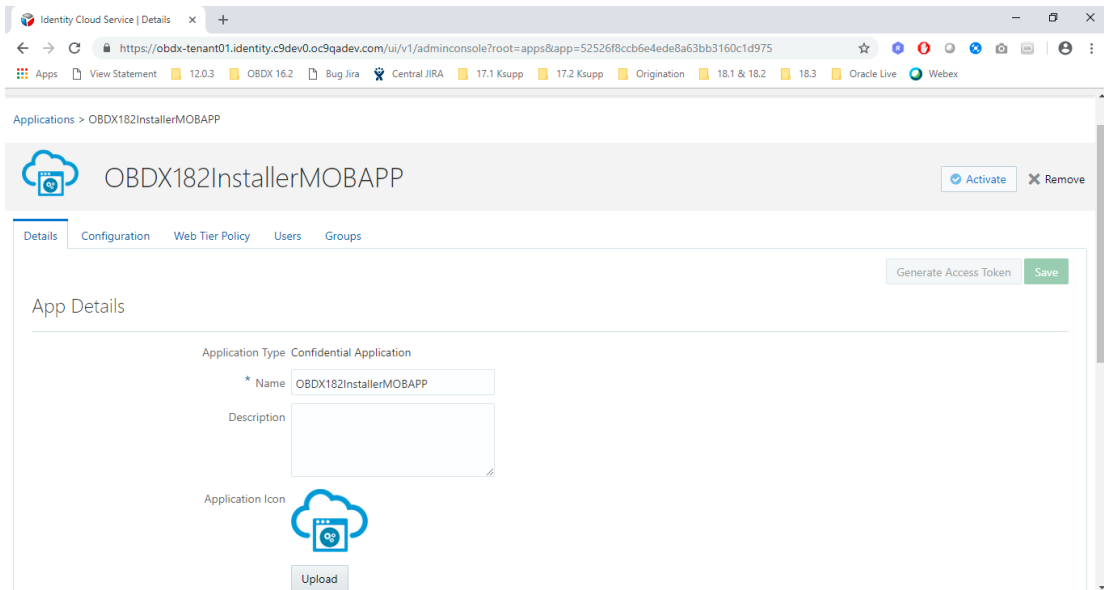

1. Click **Activate** button.

Similarly, do the same for the rest.

## 12. Database Scripts (to be executed after day0 scripts)

Replace below parameters in database scripts with appropriate values as per glossary.

<tenant-base-url>

<client\_id\_of\_SNAPSHOT\_client>

<client\_id\_of\_MobileApp\_client>

<client\_id\_of\_SIRICHATBOT\_client>

<client\_id\_of\_WEARABLE\_client>

*Insert into DIGX\_FW\_CONFIG\_ALL\_B*

*(PROP\_ID,CATEGORY\_ID,PROP\_VALUE,FACTORY\_SHIPPED\_FLAG,PROP\_COMMENTS,SUMMARY\_TEXT,CREATED\_BY,CREATION\_DATE,LAST\_UPDATED\_BY,LAST\_UPDATED\_DATE,OBJECT\_STATUS,OBJECT\_VERSION\_NUMBER,EDITABLE,CATEGORY\_DESCRIPTION) values ('POLICY\_STORE\_UTIL','SecurityConstants','IGF','N',null,'Security Constant','ofssuser',sysdate,'ofssuser',sysdate,'Y',1,'N',null);*

*update DIGX\_FW\_CONFIG\_ALL\_B set prop\_value =*

*'ipm1.0,ORACLEBI12.2.1.2,GENERIC1.0,IDCS18.2.4',SUMMARY\_TEXT = 'Entry to set IPM,ORCALE BI and IDCS at enterprise level' where category\_id = 'extxfaceadapterconfig' and prop\_id='01';*

*Insert into DIGX\_FW\_CONFIG\_VAR\_B*

*(PROP\_ID,ENV\_ID,PROP\_VALUE,FACTORY\_SHIPPED\_FLAG,PROP\_COMMENTS,CREATED\_BY,CREATION\_DATE,LAST\_UPDATED\_BY,LAST\_UPDATED\_DATE,OBJECT\_STATUS,OBJECT\_VERSION\_NUMBER,MODULE,DETERMINANT\_VALUE,TYPE,UI\_DEFINITION) values ('HOST\_IP\_IDCS','OBDX', '<tenant-base-url>', 'Y', 'set host IP for IDCS REST calls', 'ofssuser', sysdate, 'ofssuser', sysdate, null, null, 'OTHERMODULE', 'OBDX\_BU', 'TXT', '{"title": "IDCS Host IP", "validator": "", "required": false}');*

*Insert into DIGX\_FW\_CONFIG\_VAR\_B*

*(PROP\_ID,ENV\_ID,PROP\_VALUE,FACTORY\_SHIPPED\_FLAG,PROP\_COMMENTS,CREATED\_BY,CREATION\_DATE,LAST\_UPDATED\_BY,LAST\_UPDATED\_DATE,OBJECT\_STATUS,OBJECT\_VERSION\_NUMBER,MODULE,DETERMINANT\_VALUE,TYPE,UI\_DEFINITION) values ('HOST\_PORT\_IDCS','OBDX', '443', 'Y', 'set host Port for IDCS REST calls', 'ofssuser', sysdate, 'ofssuser', sysdate, null, null, 'OTHERMODULE', 'OBDX\_BU', 'TXT', '{"title": "IDCS Host Port", "validator": "PORT", "required": false}');*

*Insert into DIGX\_FW\_CONFIG\_VAR\_B*

*(PROP\_ID,ENV\_ID,PROP\_VALUE,FACTORY\_SHIPPED\_FLAG,PROP\_COMMENTS,CREATED\_BY,CREATION\_DATE,LAST\_UPDATED\_BY,LAST\_UPDATED\_DATE,OBJECT\_STATUS,OBJECT\_VERSION\_NUMBER,MODULE,DETERMINANT\_VALUE,TYPE,UI\_DEFINITION) values ('IDCS\_CONNECTION\_SCHEME','OBDX', 'https', 'Y', 'set host connection scheme for IDCS REST calls', 'ofssuser', sysdate, 'ofssuser', sysdate, null, null, 'OTHERMODULE', 'OBDX\_BU', 'TXT', '{"title": "IDCS Connection Scheme", "validator": "", "required": false}');*

```
delete from DIGX_UM_PWD_POLICY_ROLE_MAP where PASSWORDPOLICYID in ('0000001','9999999');
```

```
delete from DIGX_UM_PWD_POLICY where PASSWORDPOLICYID in ('0000001','9999999');
```

```
Update DIGX_FW_ACCESSPOINT set CLIENT_ID = '<client id of SNAPSHOT client>' where ID = 'APSNAPSHOT';
```

```
Update DIGX_FW_ACCESSPOINT set CLIENT_ID = '<client id of MobileApp client>' where ID = 'APMOBAPP';
```

```
Update DIGX_FW_ACCESSPOINT set CLIENT_ID = '<client id of SIRICHATBOT client>' where ID = 'APSIRICHATBOT';
```

```
Update DIGX_FW_ACCESSPOINT set CLIENT_ID = '<client id of WEARABLE client>' where ID = 'APWEARABLE';
```

## 13. Apply Webgate Patch on OHS using OPatch

1. Download the patch from the below link.

[https://support.oracle.com/epmos/faces/PatchDetail?\\_afdf.ctrl-state=hyoym65na\\_9&patch\\_name=28243743&releaseId=600000000073630&patchId=28243743&languageId=0&platformId=226&\\_afdfLoop=441568515075199](https://support.oracle.com/epmos/faces/PatchDetail?_afdf.ctrl-state=hyoym65na_9&patch_name=28243743&releaseId=600000000073630&patchId=28243743&languageId=0&platformId=226&_afdfLoop=441568515075199)

2. Run below commands on webgate installation.

```
[devops@obdxohs ~]$ export ORACLE_HOME=<oracle-home-path>
```

Eg. export ORACLE\_HOME=/home/devops/Oracle/Middleware/Oracle\_Home/

```
[devops@obdxohs ~]$ export PATH=$PATH:<oracle-home-path>/OPatch/
```

Eg. export PATH=\$PATH:/home/devops/Oracle/Middleware/Oracle\_Home/OPatch/

```
[devops@obdxohs ~]$ opatch lsinventory -jre <jre-path>
```

Eg. opatch lsinventory -jre

/home/devops/Oracle/Middleware/Oracle\_Home/oracle\_common/jdk/jre/

```
[devops@obdxohs ~]$ cd <local-patch-path>
```

Eg. cd /scratch/obdx/ohs/p28243743\_122130\_Linux-x86-64/28243743/

```
[devops@obdxohs 28243743]$ opatch apply
```

```
@obdxohs/scratch/obdx/ohs/Setup/28243743
b38011db270e      mmm00chl:5000/obdx182susnav/ohs      "/home/devops/common..."      182_Patch_OBP_DB_FR_2
P                mmm00chl:5000/obdx182susnav/vls      "/home/devops/common..."      182_Patch_UBS_OHS_FR_2
12f509550f89     mmm00chl:5000/obdx182susnav/vls      "/home/devops/common..."      31 hours ago              Up 31 hours (healthy)      7777/tcp, 8888/tcp, 0.0.0.0:14777->12777/tp
001->14001/tcp, 0.0.0.0:14003->14003/tcp, 12777/tcp, 0.0.0.0:14343->14343/tcp      182_Patch_UBS_OHS_FR_2      31 hours ago              Up 31 hours (unhealthy)    12001/tcp, 12003/tcp, 12343/tcp, 0.0.0.0:14
6157feefffa     mmm00chl:5000/obdx182susnav/db        "/home/devops/common..."      182_Patch_UBS_WLS_FR_2
                                                    182_Patch_UBS_DB_FR_2
                                                    31 hours ago              Up 31 hours (healthy)      0.0.0.0:1421->1521/tcp
[obdxdevops@mum00afd ~]$ docker exec -itu devops 182_Patch_UBS_OHS_FR_2 /bin/bash
[devops@obdxohs ~]$ cd /home/devops/Oracle/Middleware/Oracle_Home/
Oracle_Home/ohs Oracle_Home]$ export ORACLE_HOME=/home/devops/Oracle/Middleware/
[devops@obdxohs Oracle_Home]$ export PATH=$PATH:/home/devops/Oracle/Middleware/Oracle_Home/OPatch/
[devops@obdxohs Oracle_Home]$ cd /home/devops/Oracle/Middleware/Oracle_Home/oracle_common/jdk/jre/
[devops@obdxohs jre]$ opatch lsinventory -jre /home/devops/Oracle/Middleware/Oracle_Home/oracle_common/jdk/jre/
Oracle Interim Patch Installer version 13.9.2.0.0
Copyright (c) 2016, Oracle Corporation. All rights reserved.

Oracle Home      : /home/devops/Oracle/Middleware/Oracle_Home
Central Inventory : /home/devops/orainventory
From             : /home/devops/Oracle/Middleware/Oracle_Home/oraInst.loc
OPatch version   : 13.9.2.0.0
OUI version      : 13.9.2.0.0
Log file location : /home/devops/Oracle/Middleware/Oracle_Home/cfgtoollogs/opatch/opatch2018-10-12_14-24-34PM_1.log

OPatch detects the Middleware Home as "/home/devops/Oracle/Middleware/Oracle_Home"

lsinventory Output file location : /home/devops/Oracle/Middleware/Oracle_Home/cfgtoollogs/opatch/lsinv/lsinventory2018-10-12_14-24-34PM.txt

-----
Local Machine Information:
Hostname: obdxohs.in.oracle.com
ARU platform id: 226
ARU platform description: Linux_BMD64

There are no Interim patches installed in this Oracle Home.

-----

OPatch succeeded.
[devops@obdxohs jre]$ cd /scratch/obdx/ohs/Setup/28243743/
[devops@obdxohs 28243743]$
```

```

@obdxohs/scratch/obdx/ohs/Setup/28243743
from : /home/devops/Oracle/Middleware/Oracle_Home/oraInst.loc
OPatch version : 13.9.2.0.0
OUI version : 13.9.2.0.0
Log file location : /home/devops/Oracle/Middleware/Oracle_Home/cfgtoollogs/patch/patch2018-10-12_14-24-34PM_1.log

OPatch detects the Middleware Home as "/home/devops/Oracle/Middleware/Oracle_Home"
lsinventory Output file location : /home/devops/Oracle/Middleware/Oracle_Home/cfgtoollogs/patch/lsinv7/lsinventory2018-10-12_14-24-34PM.txt

-----
Local Machine Information:
Hostname: obdxohs.in.oracle.com
ARU platform id: 226
ARU platform description: Linux_AMD64

There are no Interim patches installed in this Oracle Home.

-----

OPatch succeeded.
[devops@obdxohs jre]$ cd /scratch/obdx/ohs/Setup/28243743/
[devops@obdxohs 28243743]$ opatch apply
Oracle Interim Patch Installer version 13.9.2.0.0
Copyright (c) 2018, Oracle Corporation. All rights reserved.

Oracle Home : /home/devops/Oracle/Middleware/Oracle_Home
Central Inventory : /home/devops/orainventory
from : /home/devops/Oracle/Middleware/Oracle_Home/oraInst.loc
OPatch version : 13.9.2.0.0
OUI version : 13.9.2.0.0
Log file location : /home/devops/Oracle/Middleware/Oracle_Home/cfgtoollogs/patch/patch2018-10-12_14-25-54PM_1.log

OPatch detects the Middleware Home as "/home/devops/Oracle/Middleware/Oracle_Home"
Verifying environment and performing prerequisite checks...
OPatch continues with these patches: 28243743
Do you want to proceed? [y/n]
y

```

### 3. Enter y

```

@obdxohs/scratch/obdx/ohs/Setup/28243743
[devops@obdxohs jre]$ cd /scratch/obdx/ohs/Setup/28243743/
[devops@obdxohs 28243743]$ opatch apply
Oracle Interim Patch Installer version 13.9.2.0.0
Copyright (c) 2018, Oracle Corporation. All rights reserved.

Oracle Home : /home/devops/Oracle/Middleware/Oracle_Home
Central Inventory : /home/devops/orainventory
from : /home/devops/Oracle/Middleware/Oracle_Home/oraInst.loc
OPatch version : 13.9.2.0.0
OUI version : 13.9.2.0.0
Log file location : /home/devops/Oracle/Middleware/Oracle_Home/cfgtoollogs/patch/patch2018-10-12_14-25-54PM_1.log

OPatch detects the Middleware Home as "/home/devops/Oracle/Middleware/Oracle_Home"
Verifying environment and performing prerequisite checks...
OPatch continues with these patches: 28243743
Do you want to proceed? [y/n]
y
User Responded with: Y
All checks passed.

Please shutdown Oracle instances running out of this ORACLE_HOME on the local system.
(Oracle Home = '/home/devops/Oracle/Middleware/Oracle_Home')

Is the local system ready for patching? [y/n]
y
User Responded with: Y
Backing up files...
Applying interim patch '28243743' to OH '/home/devops/Oracle/Middleware/Oracle_Home'
ApplySession: Optional component(s) [ oracle.oamclient.webgate.otd, 12.2.1.3.0 ] , [ oracle.oamclient.webgate.otd, 12.2.1.3.0 ] not present in the Oracle Home or a higher version is found.

Patching component oracle.oamclient.webgate.ohs, 12.2.1.3.0...
Patching component oracle.oamclient.webgate.ohs, 12.2.1.3.0...
Patch 28243743 successfully applied.
Log file location: /home/devops/Oracle/Middleware/Oracle_Home/cfgtoollogs/patch/patch2018-10-12_14-25-54PM_1.log

OPatch succeeded.
[devops@obdxohs 28243743]$

```

## 14. cloud.config

1. Go to this location [<ohs-domain-path>/config/fmwconfig/components/OHS/instances/ohs1/webgate/config/](#)

Eg.

`/home/devops/Oracle/Middleware/Oracle_Home/user_projects/domains/base_domain/config/fmwconfig/components/OHS/instances/ohs1/webgate/config/`

CREATE THE FOLLOWING FILE NAMED as cloud.config:

2. Replace below parameters in file:

`<webserver_host_name>`

`<webserver_port>`

```
{
  "cloudgateConfig":{
    "bootstrap":{
      "callbackPrefix":"<connection_scheme>://<webserver host name>:<webserver port>/oauth/callback",
      "externalIdUrl":"https://<tenant-base-url>",
      "refresh_token":false
    },
    "rest":{
      "httpsVerifyHost":false,
      "httpsVerifyServer":false,
      "httpsCertAuthFile":"",
      "httpsCr1File":""
    }
  }
}
```

## 15. cloud.policy

Go to this location [<ohs-domain-path>](#)/config/fmwconfig/components/OHS/instances/ohs1/webgate/config/

E.g..

/home/devops/Oracle/Middleware/Oracle\_Home/user\_projects/domains/base\_domain/config/fmwconfig/components/OHS/instances/ohs1/webgate/config/

CREATE THE FOLLOWING FILE NAMED as cloud.policy:



1. *Replace below parameter.*

<allowed\_scope\_name\_of\_scope\_protected\_in\_OBDX\_Client\_App>

```
{
  "cloudgatePolicy":{
    "webtierPolicy":[
      {
        "policyName":"default",
        "resourceFilters":[
          {
            "comment":"Test Application OAuth+Logout Filter",
            "type":"text",
            "filter":"/logout",
            "method":"oauth+logout"
          },
          {
            "comment":"Test Application Public Filter",
            "type":"regex",
            "filter":"/*.js",
            "method":"anonymous",
            "headers":[
              {
                "PolicyName":"$request.policy_name"
              },
              {
                "PolicyResourceMatched":"$request.policy_res"
              }
            ]
          }
        ]
      },
      {
        "comment":"Test Application OAuth Filter",
        "type":"regex",
        "filter":"/pages/*",
        "method":"oauth",
        "authorize":true,
        "scope":"<allowed_scope_name_of_protected_in_OBDX_Client
App> openid",
        "idcsscope":"protected openid",
        "headers":[
          {
            "UserName":"$subject.user.name"
          },
          {
            "PrimaryEmail":"$subject.user.emails"
          },
          {
            "PolicyName":"$request.policy_name"
          }
        ]
      }
    ]
  }
}
```



## 16. CWallet configuration

```
[devops@obdxohs ~]$ mkdir <ohs-domain-
path>/config/fmwconfig/components/OHS/instances/ohs1/webgate/config/cwg_wallet
```

Eg. mkdir

```
/home/devops/Oracle/Middleware/Oracle_Home/user_projects/domains/base_domain/config/fmw
config/components/OHS/instances/ohs1/webgate/config/cwg_wallet
```

```
[devops@obdxohs ~]$ cd <oracle-home-path>/oracle_common/bin/
```

```
[devops@obdxohs bin]$ ./orapki wallet create -wallet <ohs-domain-
path>/config/fmwconfig/components/OHS/instances/ohs1/webgate/config/cwg_wallet -auto_login
```

Eg. ./orapki wallet create -wallet

```
/home/devops/Oracle/Middleware/Oracle_Home/user_projects/domains/base_domain/config/fmw
config/components/OHS/instances/ohs1/webgate/config/cwg_wallet -auto_login
```

You will be asked to create wallet password here.

```
@obdxohs~/Oracle/Middleware/Oracle_Home/oracle_common/bin
gate/config/ohs_common_scripts] c:/home/devops/Oracle/Middleware/Oracle_Home/user_projects/domains/base_domain/config/fmwconfig/components/OHS/insevs@obdxohs common_s
cripts] cd tsj] cd /home/devops/Oracle/Middleware/Oracle_Home/user_projects/domains/base_domain/config/fmwconfig/components/OHS/instances/ohs1/webgate/config

[devops@obdxohs config]$
[devops@obdxohs config]$
[devops@obdxohs config]$
[devops@obdxohs config]$ pwd
/home/devops/Oracle/Middleware/Oracle_Home/user_projects/domains/base_domain/config/fmwconfig/components/OHS/instances/ohs1/webgate/config
[devops@obdxohs config]$ ls -ltr
total 20
drwxr-xr-x 2 devops devops 4096 Jun 12 15:30 simple
-rw-r--r-- 1 devops devops 15028 Jun 12 15:30 oblog_config_wg.xml
[devops@obdxohs config]$ cp /scratch/obdx/o
ohs/
oreInst.loc
[devops@obdxohs config]$ cp /scratch/obdx/ohs/Setup/
28243743/ cloud.config cloud.policy
[devops@obdxohs config]$ cp /scratch/obdx/ohs/Setup/cloud.*
[devops@obdxohs config]$ ls -ltr
total 28
drwxr-xr-x 2 devops devops 4096 Jun 12 15:30 simple
-rw-r--r-- 1 devops devops 15028 Jun 12 15:30 oblog_config_wg.xml
-rw-r--r-- 1 devops devops 2285 Oct 12 14:38 cloud.policy
-rw-r--r-- 1 devops devops 425 Oct 12 14:38 cloud.config
[devops@obdxohs config]$ vi cloud.policy
[devops@obdxohs config]$ vi cloud.config
[devops@obdxohs config]$ cd /home/devops/Oracle/Middleware/Oracle_Home/user_projects/domains/base_domain/config/fmwconfig/components/OHS/instances/ohs1/webgate/config
[devops@obdxohs config]$ mkdir cwg_wallet
[devops@obdxohs config]$ cd /home/devops/Oracle/Middleware/Oracle_Home/oracle_common/bin/
[devops@obdxohs bin]$ ./orapki wallet create -wallet /home/devops/Oracle/Middleware/Oracle_Home/user_projects/domains/base_domain/config/fmwconfig/components/OHS/instan
ces/ohs1/webgate/config/cwg_wallet -auto_login
Oracle PKI Tool : Version 12.2.1.3.0
Copyright (c) 2004, 2017, Oracle and/or its affiliates. All rights reserved.

Enter password:
Enter password again:
Operation is successfully completed.
[devops@obdxohs bin]$
```

```
[devops@obdxohs bin]$ export JAVA_HOME=<jre-path>
```

Eg. export JAVA\_HOME=/home/devops/Oracle/Middleware/Oracle\_Home/oracle\_common/jdk/jre

```
[devops@obdxohs bin]$ ./mkstore -wrl <ohs-domain-
path>/config/fmwconfig/components/OHS/instances/ohs1/webgate/config/cwg_wallet -
createUserCredential CWG id_secret_key <client-id> <client-secret>
```

Eg. ./mkstore -wrl

```
/home/devops/Oracle/Middleware/Oracle_Home/user_projects/domains/base_domain/config/fmw
```

```
config/components/OHS/instances/ohs1/webgate/config/cwg_wallet -createUserCredential CWG
id_secret_key <client-id> <client-secret>
```

```
@obdxohs:~/Oracle/Middleware/Oracle_Home/oracle_common/bin
crptsj@ od tsj$ cd /home/devops/Oracle/Middleware/Oracle_Home/user_projects/domains/base_domain/config/fmwconfig/components/OHS/instances/ohs1/web
[devops@obdxohs config]$
[devops@obdxohs config]$
[devops@obdxohs config]$ pwd
/home/devops/Oracle/Middleware/Oracle_Home/user_projects/domains/base_domain/config/fmwconfig/components/OHS/instances/ohs1/webgate/config
[devops@obdxohs config]$ ls -lrt
total 20
drwxr-xr-x 2 devops devops 4096 Jun 12 15:30 simple
-rw-r--r-- 1 devops devops 15028 Jun 12 15:30 oblog_config_wg.xml
[devops@obdxohs config]$ cp /scratch/obdx/o
ohs/
oraInst.loc
[devops@obdxohs config]$ cp /scratch/obdx/ohs/Setup/
28243743/ cloud.config cloud.policy
[devops@obdxohs config]$ cp /scratch/obdx/ohs/Setup/cloud.*
[devops@obdxohs config]$ ls -lrt
total 28
drwxr-xr-x 2 devops devops 4096 Jun 12 15:30 simple
-rw-r--r-- 1 devops devops 15028 Jun 12 15:30 oblog_config_wg.xml
-rw-r--r-- 1 devops devops 2285 Oct 12 14:38 cloud.policy
-rw-r--r-- 1 devops devops 425 Oct 12 14:38 cloud.config
[devops@obdxohs config]$ vi cloud.policy
[devops@obdxohs config]$ vi cloud.config
[devops@obdxohs config]$ cd /home/devops/Oracle/Middleware/Oracle_Home/user_projects/domains/base_domain/config/fmwconfig/components/OHS/instances/ohs1/webgate/config
[devops@obdxohs config]$ mkdir cwg_wallet
[devops@obdxohs config]$ cd /home/devops/Oracle/Middleware/Oracle_Home/oracle_common/bin/
[devops@obdxohs bin]$ ./orapki wallet create -wallet /home/devops/Oracle/Middleware/Oracle_Home/user_projects/domains/base_domain/config/fmwconfig/components/OHS/instan
ces/ohs1/webgate/config/cwg_wallet -auto_login
Oracle PKI Tool : Version 12.2.1.3.0
Copyright (c) 2004, 2017, Oracle and/or its affiliates. All rights reserved.

Enter password:
Enter password again:
Operation is successfully completed.
[devops@obdxohs bin]$ export JAVA_HOME=/home/devops/Oracle/Middleware/Oracle_Home/oracle_common/jdk/jre
[devops@obdxohs bin]$ ./mkstore -wrl /home/devops/Oracle/Middleware/Oracle_Home/user_projects/domains/base_domain/config/fmwconfig/components/OHS/instances/ohs1/webgate
/config/cwg_wallet -createUserCredential CWG id_secret_key ce17bcde6a94fd2c21eb55e23d26 532266b5-235c-456a-baad-2ba5e9bab7ba
Oracle Secret Store Tool : Version 12.2.1.3.0
Copyright (c) 2004, 2017, Oracle and/or its affiliates. All rights reserved.

Enter wallet password:
[devops@obdxohs bin]$
```

<passphrase> is the password phrase used for encryption. Enter a passphrase in below command and execute it.

```
[root@obdxohs devops]# openssl enc -aes-128-cbc -k "<passphrase>" -P -md sha256
salt=4EBB2F22640F225F
key=701593B3EDE07C37FD09ECB532F7E0E5
iv =E5D3D73CED2C624900F952C05BC73A6E
```

```
[devops@obdxohs bin]$ ./mkstore -wrl <ohs-domain-
path>/config/fmwconfig/components/OHS/instances/ohs1/webgate/config/cwg_wallet -
createUserCredential CWG enc_key enc <key>
```

Eg. ./mkstore -wrl  
/home/devops/Oracle/Middleware/Oracle\_Home/user\_projects/domains/base\_domain/config/fmw  
config/components/OHS/instances/ohs1/webgate/config/cwg\_wallet -createUserCredential CWG  
enc\_key enc <key>

Please enter the wallet password given above.

```
[devops@obdxohs bin]$ ./orapki wallet display -wallet <ohs-domain-
path>/config/fmwconfig/components/OHS/instances/ohs1/webgate/config/cwg_wallet
```

Eg. ./orapki wallet display -wallet  
/home/devops/Oracle/Middleware/Oracle\_Home/user\_projects/domains/base\_domain/config/fmw  
config/components/OHS/instances/ohs1/webgate/config/cwg\_wallet

```

@obdxkx/home/devops/Oracle/Middleware/Oracle_Home/oracle_common/bin
openssl098e.x86_64 0:0.9.8e-29.el7.2.3

Dependency Installed:
keyutils-libs-devel.x86_64 0:1.5.8-3.el7      krb5-devel.x86_64 0:1.15.1-19.el7
libcom_err-devel.x86_64 0:1.42.9-12.el7_5    libkadm5.x86_64 0:1.15.1-19.el7
libselinux-devel.x86_64 0:2.5-12.0.1.el7     libsepol-devel.x86_64 0:2.5-8.1.el7
libverto-devel.x86_64 0:0.2.5-4.el7         pcre-devel.x86_64 0:8.32-17.el7
zlib-devel.x86_64 0:1.2.7-17.el7

Dependency Updated:
krb5-libs.x86_64 0:1.15.1-19.el7      libcom_err.x86_64 0:1.42.9-12.el7_5
libselinux.x86_64 0:2.5-12.0.1.el7    libselinux-utils.x86_64 0:2.5-12.0.1.el7

[root@obdxkx devops]# openssl enc -aes-128-cbc -k "god bless you" -P -md sha256
ealt59E548065F81C156f openssl enc -aes-128-cbc -k "god bless you" -P -md sha256
key=6111D6C63AD4A55FABFE06EE0C9E1658
iv =97AFDC09D391FE36EB2B0BE4DF
[root@obdxkx devops]# ./mkstore -url /home/devops/Oracle/Middleware/Oracle_Home/user_projects/domains/base_domain/config/fmwconfig/components/OHS/instances/ohs1/webgate/c/config/cwg_wallet -createUserCredential CWG enc_key enc 6111D6C63AD4A55FABFE06EE0C9E1658
bash: ./mkstore: No such file or directory
[root@obdxkx devops]# cd /home/devops/Oracle/Middleware/Oracle_Home/oracle_common/bin/
[root@obdxkx bin]# ./mkstore -url /home/devops/Oracle/Middleware/Oracle_Home/user_projects/domains/base_domain/config/fmwconfig/components/OHS/instances/ohs1/webgate/c/config/cwg_wallet -createUserCredential CWG enc_key enc 6111D6C63AD4A55FABFE06EE0C9E1658
ERROR: No Java
/home/devops/Oracle/Middleware/Oracle_Home/oracle_common/jdk or $JAVA_HOME should point to valid Java runtime
[root@obdxkx bin]# export JAVA_HOME=/home/devops/Oracle/Middleware/Oracle_Home/oracle_common/jdk/jre
[root@obdxkx bin]# ./mkstore -url /home/devops/Oracle/Middleware/Oracle_Home/user_projects/domains/base_domain/config/fmwconfig/components/OHS/instances/ohs1/webgate/c/config/cwg_wallet -createUserCredential CWG enc_key enc 6111D6C63AD4A55FABFE06EE0C9E1658
Oracle Secret Store Tool : Version 12.2.1.3.0
Copyright (c) 2004, 2017, Oracle and/or its affiliates. All rights reserved.

Enter wallet password:
[root@obdxkx bin]# ./orapki wallet display -wallet /home/devops/Oracle/Middleware/Oracle_Home/user_projects/domains/base_domain/config/fmwconfig/components/OHS/instances/ohs1/webgate/config/cwg_wallet
Oracle PKI Tool : Version 12.2.1.3.0
Copyright (c) 2004, 2017, Oracle and/or its affiliates. All rights reserved.

Requested Certificates:
User Certificates:
Oracle Secret Store entries:
CWG##enc_key
CWG##id_secret_key
Trusted Certificates:
[root@obdxkx bin]#

```

## 17. Enabling webgate in httpd.conf

Go to [<ohs-domain-path>/config/fmwconfig/components/OHS/instances/ohs1/](#)

Eg.

*/home/devops/Oracle/Middleware/Oracle\_Home/user\_projects/domains/base\_domain/config/fmwconfig/components/OHS/instances/ohs1/*

UNCOMMENT THE FOLLOWING:

**include "webgate.conf"**

## 18. Change in mod\_wl\_ohs.conf

Go to [<ohs-domain-path>/config/fmwconfig/components/OHS/instances/ohs1/](#)

ADD THE FOLLOWING:

```
<IfModule weblogic_module>
    WebLogicHost obdxwls.in.oracle.com
    WebLogicPort 12003
    Debug ON
    WLLogFile /scratch/obdx/ohs/logs/weblogic.log
    MatchExpression /digx/*
</IfModule>

<Location /digx>
    WLSRequest On
    WLProxySSL ON
    WLProxySSLPassThrough ON
</Location>
```

## 19. UI Changes

### 19.1 constants.js:

In UI deployments, go to channel\framework\js\constants\constants.js file, keep the value of 'authenticator' as below.

**authenticator: "IDCSAuthenticator"**

### 19.2 idcs-config.json:

In UI deployments, go to channel\json\index\login\idcs-config.json file, put the appropriate values of OBDX Client Application in IDCS.

- [<name of obdx client app in idcs>](#) is the client application name. Eg. "OBDXClient"
- [<client id of obdx client app in idcs>](#) is client id of client application. Eg. *"00fa15d18cd147398ca4b53f957a4e3f"*
- [<client secret of obdx client app in idcs>](#) is the client secret of client application.