

# Oracle Banking Digital Experience

UK Open Banking Configuration Guide  
Release 19.2.0.0.0

Part No. F25153-01

December 2019

**ORACLE®**

Oracle Financial Services Software Limited

Oracle Park

Off Western Express Highway

Goregaon (East)

Mumbai, Maharashtra 400 063

India

Worldwide Inquiries:

Phone: +91 22 6718 3000

Fax: +91 22 6718 3001

[www.oracle.com/financialservices/](http://www.oracle.com/financialservices/)

Copyright © 2018, Oracle and/or its affiliates. All rights reserved.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are “commercial computer software” pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate failsafe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

This software or hardware and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

# Table of Contents

<b>1. Preface</b> .....	<b>4</b>
1.1 Intended Audience .....	4
1.2 Documentation Accessibility .....	4
1.3 Access to Oracle Support .....	4
1.4 Structure.....	4
1.5 Related Information Sources.....	4
<b>2. Objective and Scope</b> .....	<b>5</b>
<b>3. Technology Stack</b> .....	<b>6</b>
<b>4. Pre-requisites</b> .....	<b>7</b>
<b>5. Headers Configuration</b> .....	<b>8</b>
<b>6. Properties</b> .....	<b>9</b>
<b>7. SAML</b> .....	<b>10</b>
7.1 SAML Setup .....	10
7.2 SAML Integration .....	10
<b>8. OAuth Configuration</b> .....	<b>11</b>
8.1 UI configuration .....	11
8.2 Weblogic configuration.....	11
<b>9. Extensibility and Code Conventions</b> .....	<b>14</b>

# 1. Preface

## 1.1 Intended Audience

This document is intended for the following audience:

- Customers
- Partners

## 1.2 Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=accandid=docacc>.

## 1.3 Access to Oracle Support

Oracle customers have access to electronic support through My Oracle Support. For information, visit

<http://www.oracle.com/pls/topic/lookup?ctx=accandid=info> or visit

<http://www.oracle.com/pls/topic/lookup?ctx=accandid=trs> if you are hearing impaired.

## 1.4 Structure

This manual is organized into the following categories:

*Preface* gives information on the intended audience. It also describes the overall structure of the User Manual.

The subsequent chapters describes following details:

- Purpose
- Configuration / Installation.

## 1.5 Related Information Sources

For more information on Oracle Banking Digital Experience Release 19.2.0.0.0, refer to the following documents:

- Oracle Banking Digital Experience Licensing Guide

## 2. Objective and Scope

### Background

Open Banking Configuration Document provides the various configurations required to enable UK Open Banking in OBAPI

### Scope

- Headers Configuration
- Properties
- SAML Integration
- OAuth Configuration
- Code Convention and Extensibility

### 3. Technology Stack

Software	Version
Java	Java JDK or JRE version 8
OBDX/OBAPI	19.2.0.1.0
OAuth	OBDX Internal OAuth

#### Abbreviations

OOTB	Out of the Box
TPP	Third Party Providers
ASPSP	Account Servicing Payment Service Provider
SAML	Security Assertion Markup Language

## 4. Pre-requisites

- Java JDK or JRE version 7 or higher must be installed. For installation of Java please refer [installation guide](#).
- OAuth Setup
- Weblogic Server with SAML Assertion capability

## 5. Headers Configuration

There are two types of headers configuration available for UK Open Banking.

- System Headers (i.e. Mandatory Headers and its respective value validation)
- Configuration Headers (i.e. Mandatory Headers).

Below are the configuration steps and Out of the box header already configured in the system.

**System Headers:-** As of now in OOTB one header has been added as mandatory “x-fapi-financial-id” with value as “491308330388688” (This is a random value and can be changed. This value is issued by OBIE and corresponds to the Organization Id of the ASPSP in the Open Banking Directory). This value needs to be configured by Bank or ASPSP. This header needs to be sent by the TPP to the ASPSP mandatorily with the same value. Both Header name and Header value are validated for System Headers.

For configuring more system headers, below script is to be executed in the OBAPI Admin schema.

```
Insert into DIGX_FW_CONFIG_ALL_B (PROP_ID, CATEGORY_ID, PROP_VALUE,
FACTORY_SHIPPED_FLAG, PROP_COMMENTS, SUMMARY_TEXT, CREATED_BY,
CREATION_DATE, LAST_UPDATED_BY, LAST_UPDATED_DATE, OBJECT_STATUS,
OBJECT_VERSION_NUMBER) values ('%%HEADER
NAME%%','OpenbankingSystemHeaders','%%HEADERVALUE%%','N',null,'Open
Banking','ofssuser',sysdate,'ofssuser',sysdate,'Y',1);
```

Below Query is used to check the System Headers in the system

```
select * from digx_fw_config_all_b where category_id = 'OpenbankingSystemHeaders';
```

**Configuration Headers :-** As of now in OOTB one header has been added as mandatory - “x-fapi-interaction-id”. This header is required to be sent by the TPP to the ASPSP mandatorily with any value.

Only header name is validated in case of Configuration Headers.

For configuring more config headers, below script is to be executed in the OBDX/OBAPI Admin schema.

```
Insert into DIGX_FW_CONFIG_ALL_B (PROP_ID, CATEGORY_ID, PROP_VALUE,
FACTORY_SHIPPED_FLAG, PROP_COMMENTS, SUMMARY_TEXT, CREATED_BY,
CREATION_DATE, LAST_UPDATED_BY, LAST_UPDATED_DATE, OBJECT_STATUS,
OBJECT_VERSION_NUMBER) values ('%%HEADER NAME%%','
OpenbankingConfigHeaders',null,'N',null,'Open
Banking','ofssuser',sysdate,'ofssuser',sysdate,'Y',1);
```

Below Query is used to check the System Headers in the system

```
select * from digx_fw_config_all_b where category_id = 'OpenbankingConfigHeaders';
```



## 6. Properties

Below are the properties required to be updated in the UK Open Banking. Please find the below properties, its purpose and OOTB values.

Table:- DIGX\_FW\_CONFIG\_ALL\_B

Category-Id :- OpenBankingConfig

Property Id	Property Value (Out of the Box)	Purpose
CONSENT_EXPIRYDAYS	90	This value is used to check if expiry date send by TPP for the Account Access Consent is not more than 90 days and if it is more than 90 days then ASPSP will reject this value
CONSENT_HANDLER	com.ofss.digx.app.openbanking.consent.handler.uk.UKConsentHandler	Handler defines the Region specific behavior of the Open Banking framework. By default UK Consent Handler is used for UK Open Banking compatibility

Token Settings

Category-Id :- SecurityConstants

Property Id	Property Value	Purpose
SIGNER	MAC/no row – MAC Signer X509RS256 – x509 signed token with RS256 algorithm X509PS256 - x509 signed token with PS256 algorithm	The algorithm used to generate JWT token.

## 7. SAML

### 7.1 SAML Setup

SAML Setup is required for propagating User Identification for account selection as part of consent authorization. Follow the 7<sup>th</sup> section of the document available at below location for SAML setup:



Adobe Acrobat  
Document

### 7.2 SAML Integration

SAML Integration is required for asserting User Identification for account selection as part of consent authorization. Steps to be followed for SAML Integration are as below.

URL for SAML Account Rest should be as :- `http://<host>:<port>/ob/saml/accounts`

One default Internal Touch Point configuration will be required to handle Access to FETCH and POST Accounts through SAML.

Create a new TouchPoint for SAML services Access and configure in the web.xml of **obdx.app.rest.idm.ear** for the URL "**ob/saml/accounts**" as "**init-param :- obdx.saml.accesspoint**". So through Role Transaction Mapping of the newly created touchpoint, the access would be provided for the SAML services of Open Banking FETCH and POST account.

As part of User Onboarding in OBAPI, the created touchpoint needs to be associated to the user being onboarded.

## 8. OAuth Configuration

### 8.1 UI configuration

OAuth Identity Domain Maintenance will require below maintenance to configure UI Component for Authorizing consent.


The value of Consent Page URL ( Menu -> OAuth -> Identity Domain Maintenance) is configured as `http://host:port?homeComponent=authorize-consent&homeModule=open-banking&applicationType=digx-auth`.

### 8.2 Weblogic configuration


OAuth Maintenance will require below maintenance in weblogic to configure an URL.

**Step 1:** Login to weblogic

**Step 2:** Go to Security Realms

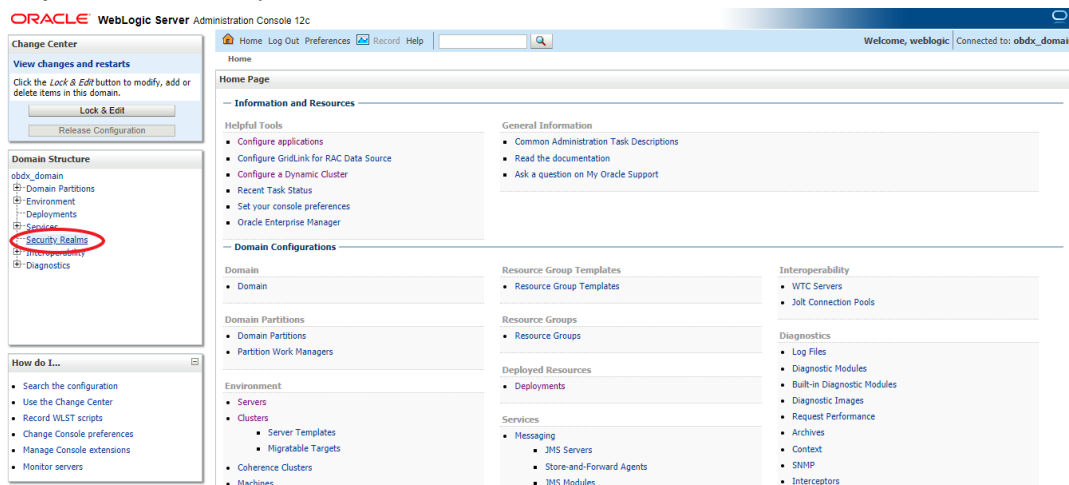

**Step 3:** Go to myrealm

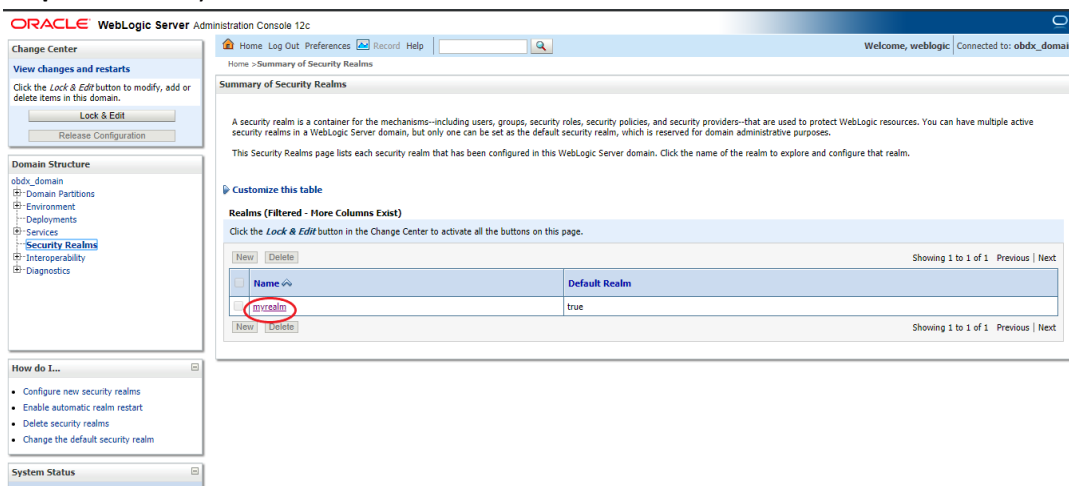

### Step 4: Go to Providers


The screenshot shows the Oracle WebLogic Server Administration Console. The left sidebar contains navigation menus for 'Change Center', 'Domain Structure', and 'How do I...'. The main content area is titled 'Settings for myrealm' and has several tabs: 'Configuration', 'Users and Groups', 'Roles and Policies', 'Credential Mapping', 'Providers', and 'Migration'. The 'Providers' tab is selected and circled in red. Below the tabs, there are configuration options for the realm, including 'Name', 'Security Model Default' (set to 'DD Only'), and checkboxes for 'Combined Role Mapping Enabled', 'Use Authorization Providers to Protect JMX Access', and 'Automatically Restart After Non-Dynamic Changes'.

### Step 5: Go to OBDXJWT


The screenshot shows the Oracle WebLogic Server Administration Console with the 'Providers' tab selected. The 'Authentication' sub-tab is active, displaying a table of authentication providers. The 'OBDXJWT' provider is highlighted with a red circle. The table lists the following providers:

Name	Description	Version
DBAuthenticator	OBDX - DB Authenticator	18.3.2.2.0.956
SQLAuth	Provider that performs DBMS authentication	1.0
OBDXJWT	OBDX Identity Assertion Provider (JWT and OAuth)	18.3.2.2.0.956
DefaultAuthenticator	WebLogic Authentication Provider	1.0
DefaultIdentityAsserter	WebLogic Identity Assertion provider	1.0

**Step 6: Go to Provider Specific**

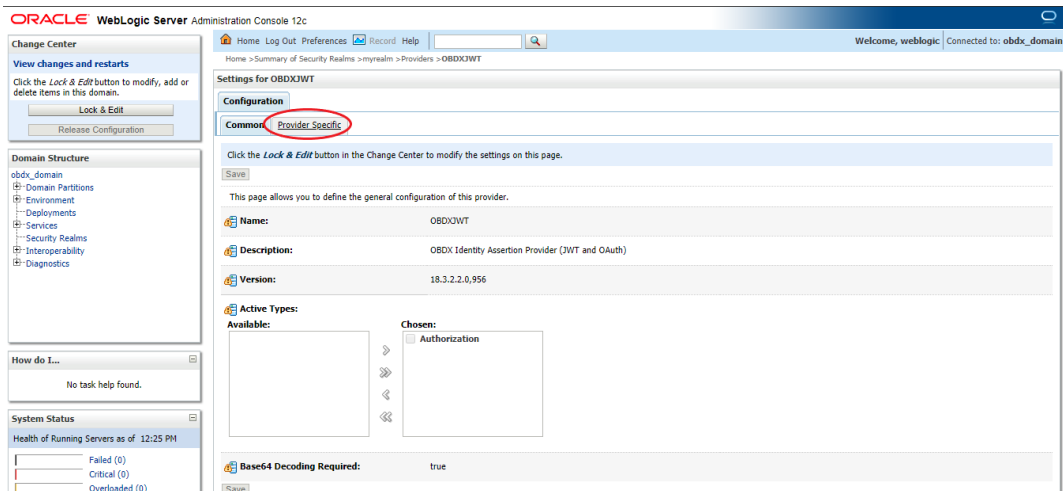

**Step 7: Edit Oauth URL and add the following url and save.**  
 “http://{{host}}:{{manage-server-port}}/digx-auth/v1/token/info”

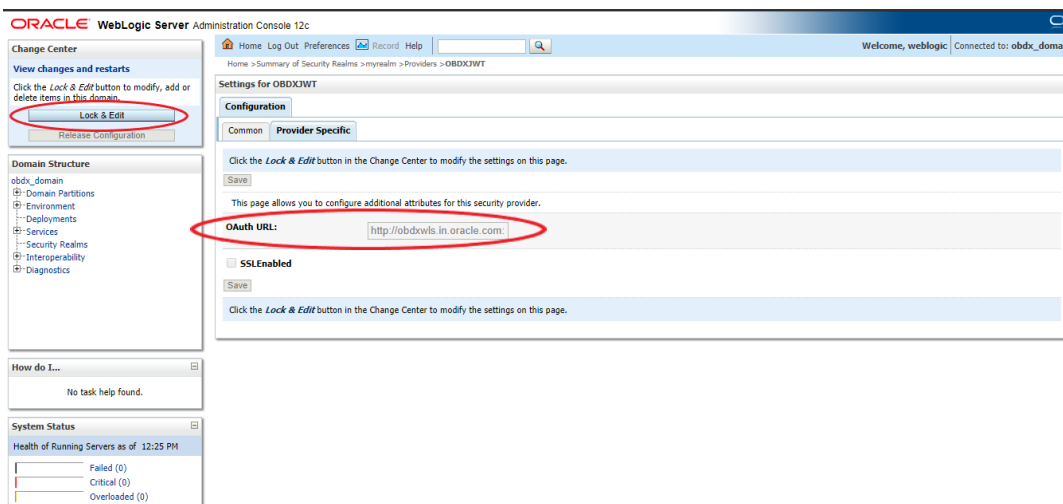

## 9. Extensibility and Code Conventions

### Code Convention of Account API's

Accounts related API should use below arguments and return type for working with UK Open Banking

#### Arguments

SessionContext sessionContext

com.ofss.digx.app.openbanking.dto.accounts.uk.AccountRequestDTO  
accountRequestDTO

#### Return Type

BaseResponseDTO<T>

Where T extends DataTransferObject

Any service implemented with the above type of argument will be compatible with UK Open Banking.

### Code Convention of Payment API's

Payment related API should use below arguments and return type for working with UK Open Banking

#### Arguments

Create and Read Method

SessionContext sessionContext

Any DTO Object which extends com.ofss.digx.app.openbanking.dto.consent.uk.UKPaymentDTO

Any service implemented with the above type of argument will be compatible with UK Open Banking.

### Error Message Framework

The Error Message Framework helps convert the OBAPI error response according to the UK Open Banking Specifications.

The error response structure for Open Banking Read/Write APIs is as follows:

```
{
  "Code": "...",
  "Id": "...",
  "Message": "...",
  "Errors": [
    {
```

```

    "ErrorCode": "...",
    "Message": "...",
    "Path": "...",
    "Url": "..."
  }
]
}

```

The UK Open Banking specified error response is handled using DIGX\_OB\_UK\_OBDX\_ERROR\_MAP table.

The contents of the table are as follows:

Column Name	Description
DIGX_ERROR_CODE	Represents the OBAPI error codes. This is a Primary and Unique Key
UK_ERROR_CODE	Represents the Open Banking specified error code
PATH	Represents the reference to the JSON Path of the field with error. Can be null.
URL	Represents the URL to help remediate the problem, or provide more information etc. Can be null.

For mapping OBAPI error codes with UK Open Banking specified codes below script can be used:

```

Insert into DIGX_OB_UK_OBDX_ERROR_MAP
(DIGX_ERROR_CODE,UK_ERROR_CODE,PATH,URL) values ('%%OBDX Error
Code%%','%%Open Banking specified error code%%', '%%Path%%', '%%URL%%');

```

For example –

```

Insert into DIGX_OB_UK_OBDX_ERROR_MAP
(DIGX_ERROR_CODE,UK_ERROR_CODE,PATH,URL) values
('DIGX_OB_0010','UK.OBIE.Field.Missing', 'Data.Initiation ',null);

```

Below Query is used to check the OBAPI errors mapped with UK Open Banking specified error codes in the system

```
select * from DIGX_OB_UK_OBDX_ERROR_MAP;
```

For configuring HTTP status codes with custom message, below script can be used:

```
Insert into DIGX_FW_CONFIG_ALL_B (PROP_ID, CATEGORY_ID, PROP_VALUE,
FACTORY_SHIPPED_FLAG, PROP_COMMENTS, SUMMARY_TEXT, CREATED_BY,
CREATION_DATE, LAST_UPDATED_BY, LAST_UPDATED_DATE, OBJECT_STATUS,
OBJECT_VERSION_NUMBER)
```

```
values ('%%HTTP Status code%%','OpenBankingErrorConfig','%%Error
Message%%','N',null,'OpenBanking Error Message','ofssuser',sysdate,'ofssuser',sysdate,'Y',1);
```

Below Query is used to check the Open Banking HTTP status codes in the system

```
select * from digx_fw_config_all_b where category_id = ' OpenBankingErrorConfig';
```

### Permission Response Handler

Permissions is used in only Account API's. Based on Permissions, Response is generated based on permissions.

OBAPI consists of Permission Handler against each type of permissions. This configuration is available in the table **DIGX\_OB\_UK\_PERMISSIONS\_MASTER**

The contents of the table are as follows:

Column Name	Description
SERVICEID	Represents the OBAPI Service Id for which the permission and its handler is available
PERMISSION	Represents Permission
RESPONSEHANDLER	Represent Permission Handler

Permission Handler can be overridden or can be newly introduced. This will be required for additional fields mapping which is not available OOTB. Steps for the same are as follows

Introducing Permission Handler

New Permission Handler should implement interface IResponseHandler

New Permission Handler should have below methods

```
public static <T implements IResponseHandler> getInstance()
```

```
public <T extends DataTransferObject> assembleResponse(DataTransferObject object,
List<String> permissions) – This method assembles response from object to the require response
object which needs shown in the API response. Object is the response got from base sevice and
```



T will be the response object require by API specifications. Assembling of the values will be done this method

public int getPriority() – This defines the high priority of the handler to be applied for assembling response in case of permissions and its handler has been consented by the user i.e. Basic and Detail permission will have different handlers but if the consent is both the permisison the priority of the handler will decide which needs to be executed on high priority.

[Home](#)