

Development of Online Forms  
Oracle Banking Corporate Lending  
Release 14.4.0.0.0  
[May] [2020]



---

## Contents

|       |                                            |    |
|-------|--------------------------------------------|----|
| 1.    | Preface .....                              | 3  |
| 1.1   | Audience .....                             | 3  |
| 1.2   | Related Documents .....                    | 3  |
| 2.    | Introduction.....                          | 3  |
| 2.1   | How to use this Guide.....                 | 3  |
| 3.    | Overview of Online Form.....               | 4  |
| 4.    | Screen Development.....                    | 4  |
| 4.1   | Header Information .....                   | 5  |
| 4.2   | Preferences .....                          | 5  |
| 4.3   | Data Sources .....                         | 6  |
| 4.4   | Data Blocks.....                           | 8  |
| 4.5   | Screens .....                              | 10 |
| 4.6   | Field Sets.....                            | 12 |
| 4.7   | Actions .....                              | 13 |
| 4.8   | Launch Forms .....                         | 14 |
| 4.9   | Call Forms.....                            | 15 |
| 4.9.1 | Sub System Pickup/Processing .....         | 15 |
| 4.10  | Summary .....                              | 16 |
| 4.11  | Preview .....                              | 18 |
| 5.    | Generated Units .....                      | 19 |
| 5.1   | Front End Units .....                      | 19 |
| 5.1.1 | Language xml .....                         | 19 |
| 5.1.2 | SYS JavaScript File .....                  | 20 |
| 5.1.3 | Release Type Specific JavaScript File..... | 20 |
| 5.2   | Data Base Units.....                       | 20 |
| 5.2.1 | Static Scripts .....                       | 20 |
| 5.2.2 | System Packages.....                       | 20 |
| 5.2.3 | Hook Packages.....                         | 21 |
| 5.3   | Other Units .....                          | 21 |
| 5.3.1 | Xsd.....                                   | 21 |
| 6.    | Extensible Development .....               | 21 |
| 6.1   | Extensibility in JavaScript Coding.....    | 21 |
| 6.2   | Extensibility in Backend Coding.....       | 22 |

---

# 1. Preface

This document describes the features of Online Forms in FLEXCUBE and the process of designing a Online form screen using Oracle FLEXCUBE Development Workbench for Universal Banking

## 1.1 Audience

This document is intended for FLEXCUBE Application developers/users that use Development Workbench to develop various FLEXCUBE components.

To Use this manual, you need conceptual and working knowledge of the below:

| <i>Proficiency</i>                          | <i>Resources</i>                                           |
|---------------------------------------------|------------------------------------------------------------|
| FLEXCUBE Functional Architecture            | Training programs from Oracle Financial Software Services. |
| FLEXCUBE Technical Architecture             | Training programs from Oracle Financial Software Services. |
| FLEXCUBE Screen Development                 | <i>04-Development_WorkBench_Screen_Development-I.docx</i>  |
| Working knowledge of Web based applications | Self Acquired                                              |
| Working knowledge of Oracle Database        | Oracle Documentations                                      |
| Working knowledge of PLSQL & SQL Language   | Self Acquired                                              |
| Working knowledge of XML files              | Self Acquired                                              |

## 1.2 Related Documents

[\*04-Development\\_WorkBench\\_Screen\\_Development-I.docx\*](#)  
[\*05-Development\\_WorkBench\\_Screen\\_Development-II.docx\*](#)

# 2. Introduction

## 2.1 How to use this Guide

The information in this document includes:

- [Chapter 2 , “Introduction”](#)
- [Chapter 3 , “Overview of Online Form”](#)
- [Chapter 4 , “Screen Development”](#)
- [Chapter 5 , “Generated Units”](#)
- [Chapter 5 , “Extensible Development”](#)

### 3. Overview of Online Form

Online Forms are function Id’s (screens) which is used for creating Contracts for respective modules. Same contracts can be processed further for Payments, Availments, Amendments, Reassignments and Authorizations also using Online forms.

All the transaction processing in FLEXCUBE is carried out through Online screens  
Online form screens should be launched independently.

*Example: Letter Of Credit (LC) contract*

*An LC contract is an instruction wherein a customer requests the bank to issue, advice or confirm a letter of credit, for a trade transaction. An LC substitutes a bank’s name and credit for that of the parties involved. The bank thus undertakes to pay the seller/beneficiary even if the remitter fails to pay.*

*Thus for each module we should develop different function Id’s for creating contracts and others online forms for other operations like Payments, Availments, Amendments, Reassignments and Authorizations.*

|          |                            |
|----------|----------------------------|
| LCDTRONL | - Contract Input           |
| LCDAMEND | - Amend Confirmation Input |
| LCDAVMNT | - Availment Input          |
| LCDTRPAY | - Payment Input            |
| LCDTRANF | - Transfer Input           |
| LCDEPMNT | - Manual Liquidation Input |
| LCDTREAS | - Contract Reassign        |
| LCDTRAUT | - Amend Confirmation Input |

On launching the Online form screen, user has to input the respective values to create the contract. Form may have the different user-defined actions like Product-Default, Enrich, and Subsystem-Pickup while creating contract. Once all the user-defined actions performed finally user has to save the contract.


### 4. Screen Development

Design and development of a Online Form function id is similar to any other function Ids. This section briefs the steps in designing a Online Form screen.

For detailed explanation, refer the document: **04-Development\_WorkBench\_Screen\_Development-I.docx**

## 4.1 Header Information

Provide the header information as shown in the figure.

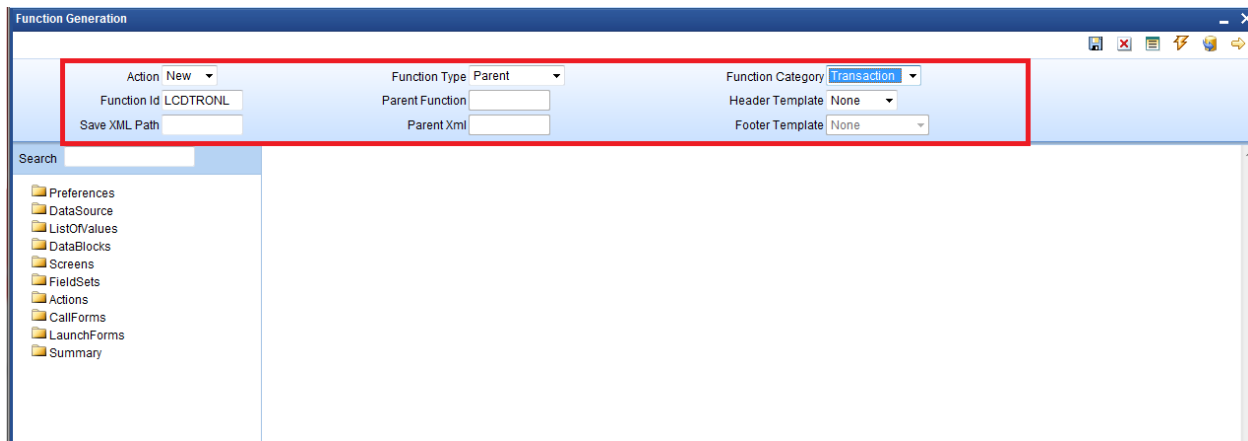

The screenshot shows a software window titled "Function Generation". It contains several input fields and dropdown menus. A red rectangle highlights the following fields: "Action" (set to "New"), "Function Type" (set to "Parent"), "Function Category" (set to "Transaction"), "Function Id" (set to "LCDTRONL"), "Parent Function" (empty), "Header Template" (set to "None"), "Save XML Path" (empty), "Parent Xml" (empty), and "Footer Template" (set to "None"). On the left side of the window, there is a "Search" bar and a tree view containing folders: "Preferences", "DataSource", "ListOfValues", "DataBlocks", "Screens", "FieldSets", "Actions", "CallForms", "LaunchForms", and "Summary".

Fig 4.1 Online Form header Information

Note the following while providing header information.

- i) Name of the Online form :  
**Online Form name has to have the third character as 'D'.** Ideally, the length of the name should be 8 characters.  
*Example: LCDTRONL, BCDTRONL etc are valid online form names*
- ii) Online Form Category:  
Function Category has to be **Transaction**
- iii) Footer Template:  
For Transaction screens, footer template has to be selected as **NONE**. System does not provide any default template for transaction screens; hence developer has to design the footer portion of the screen manually. Developer has to make sure that footer designed has generic fields like transaction status (TXNSTAT), authorization status(AUTHSTAT) etc  
For Online Process Flow Screens footer template should be selected as **PROCESS**.
- iv) Function Type :  
Parent and Child functionality is supported for Online forms.

## 4.2 Preferences

Provide the menu details in the Preferences screen

Function Generation

Action: Load | Function Id: LCDTRONL | Function Type: Parent | Function Category: Transaction | Header Template: None | Footer Template: None

Save XML Path: LCDTRONL\_F | BROWSE | Parent Function: | Parent Xml: |

Search: | Preferences

Preferences:

- ☐ Head Office Function
- ☐ Logging Required
- ☒ Auto Authorization
- ☐ Tank Modifications
- ☐ Field Log Required
- ☒ Multi Branch Access
- ☐ Excel Export Required

Module: LC | Module Description: Letters Of Credit

Branch Program Id: | Process Code: | SVN Repository URL: | Transaction Block Name: BLK\_CONTRACT\_DETAILS | Transaction Field Name: BRANCH

| Function Id                                  | Module * | Module Description |
|----------------------------------------------|----------|--------------------|
| <input type="checkbox"/> LCDTRONL            | LC       | Letters Of Credit  |
| <input checked="" type="checkbox"/> LCSTRONL | LC       | Letters Of Credit  |

Fig 4.2 Online Form Preferences

Note the following while providing Preferences for Online Forms.

- i) Module name :  
Module name is a mandatory field and has to be provided. It is recommended that the first two letters of the function id is kept as same as the module name. Naming of the generated package will be derived from the module code maintained
- ii) Script for the following tables will be generated by Workbench (menu details) which are essential for launching of an Online screen.
  1. SMTB\_MENU
  2. SMTB\_FCC\_FCJ\_MAPPING
  3. SMTB\_FUNCTION\_DESCRIPTION
  4. SMTB\_ROLE\_DETAILS
 Type string of the Online screens will be generated as 'O' in *smtb\_menu* table.
- iii) Transaction specific action codes has to checked in the control string whichever applicable  
Example: LIQUIDATE, ROLLOVER, REVERSAL etc

## 4.3 Data Sources

Identify the tables/views for the Online form. Define data sources and add data source fields as required.

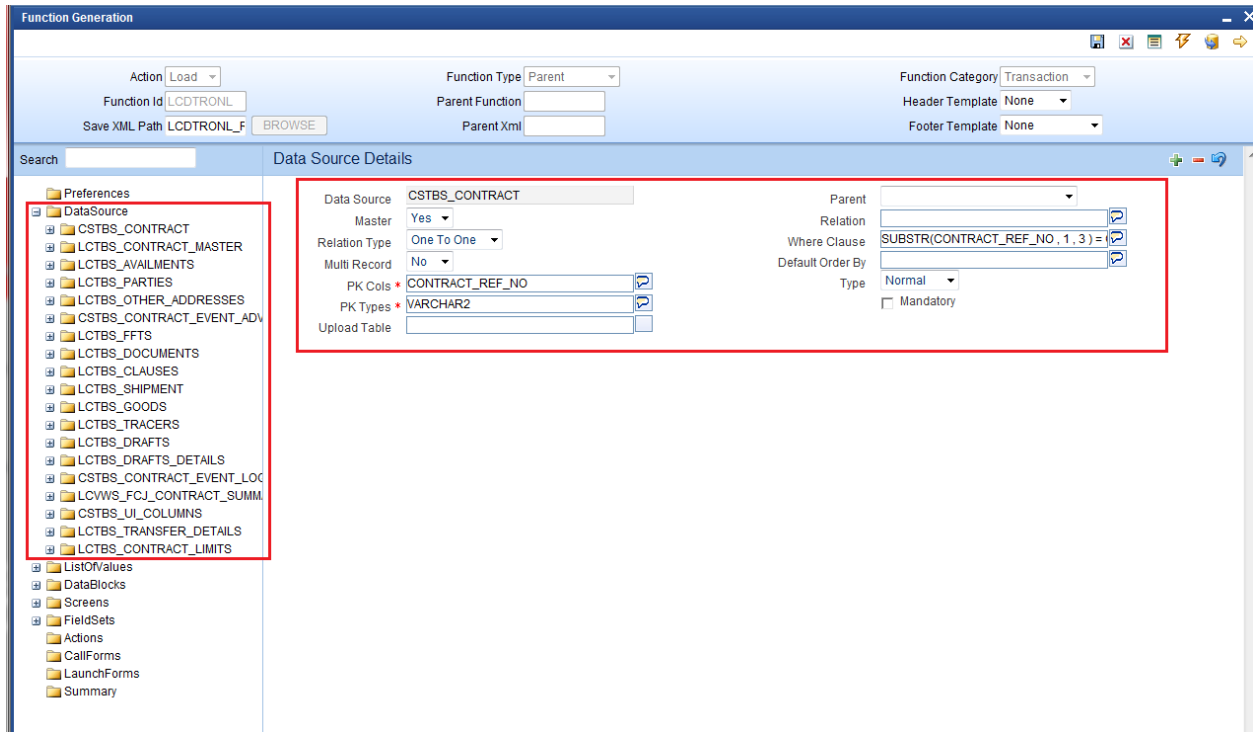


Fig 4.3 Adding data sources and maintaining properties

Note the following while creating data sources

- i) Master Data Source has to be a single entry data source.
- ii) Logical Relationships has to be maintained for all data sources except the parent
- iii) Provide PK Cols and PK types for all data sources.  
*If data source is a multi record block, then make sure it has at least one more pk than its parent which helps to uniquely identify each record of multi record block*
- iv) **Minimize the use of views in the data sources.** For transaction screens, system generated upload logic (fn\_sys\_upload\_db) is not called within the system package . It is up to the developer to decide whether the system generated code can be used or not. ***If views are used in data sources, then this function should not be used by the developer.***
- v) Usually for Online forms, a separate view can be used for summary purpose. This view will have all the fields required to be displayed in the summary.  
*Example: LCVWS\_FCJ\_CONTRACT\_SUMMARY*

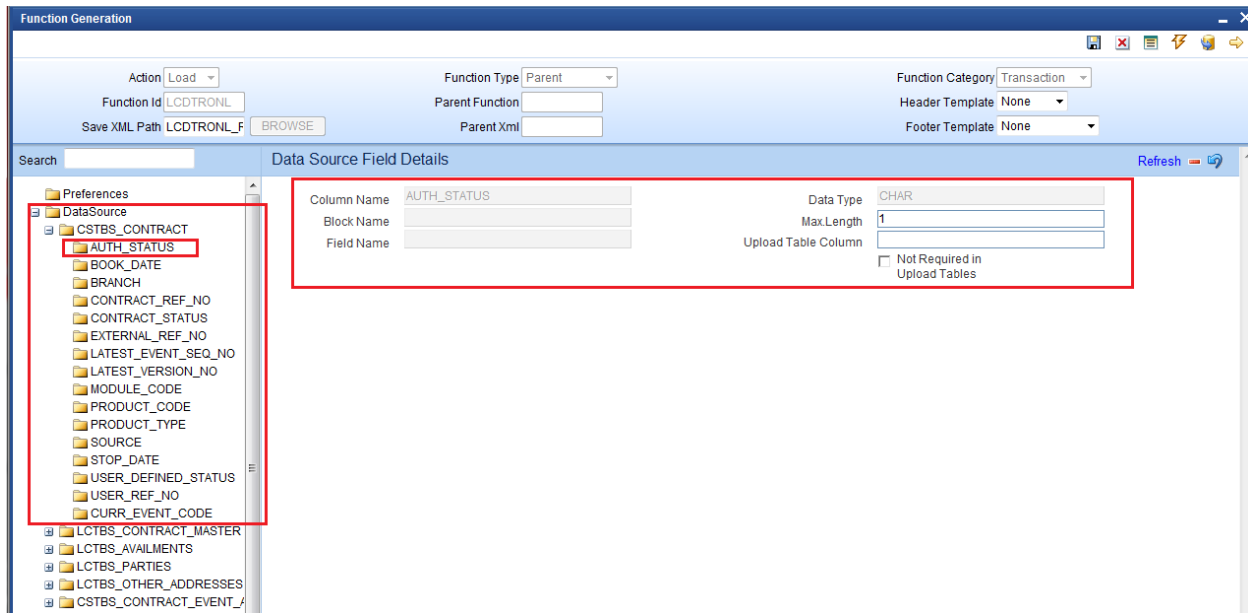


Fig 4.4 Adding data sources fields and its properties

Max length of the data source field can be modified as per requirement

## 4.4 Data Blocks

Determine the block structure for the function id .Define Data Blocks as per the design

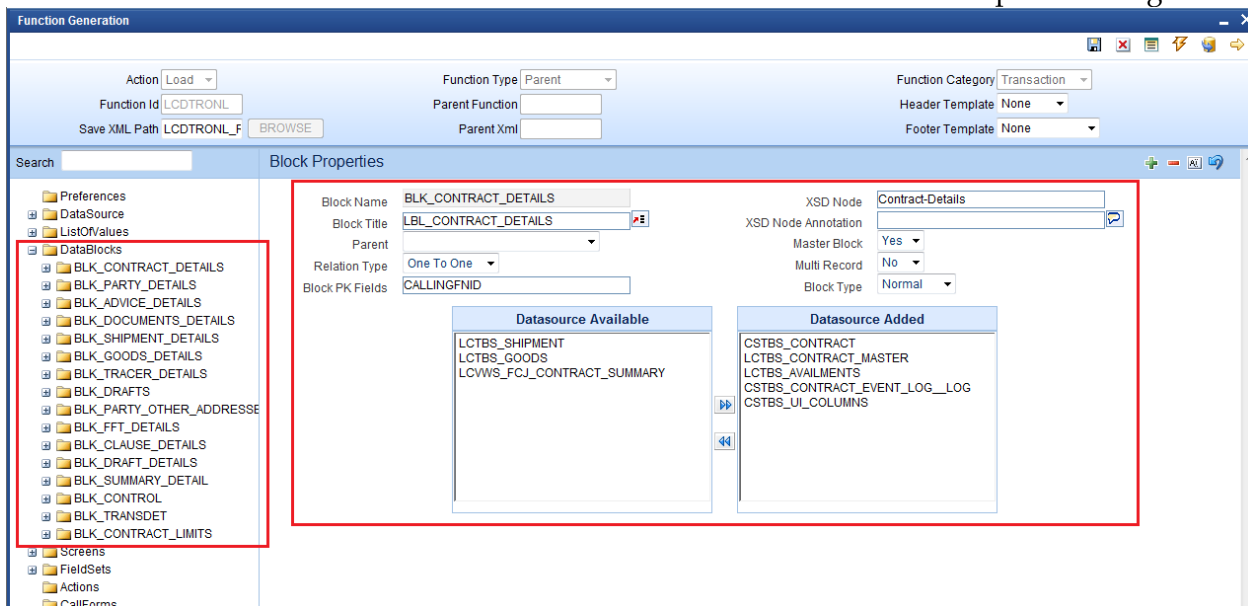


Fig 4.5 Defining Data Blocks and maintaining its properties

Note the following while creating data blocks

- i) Master Data block has to be a single entry data source.
- ii) Provide Xsd node name if the block is normal and is required in gateway request

- iii) Block order and block field order can be changed by re arranging blocks and block fields in the browser tree (drag and drop). **Note that all units will have to be regenerated if block or block field order is changed** (including xsd's)
- iv) Related currency fields should be placed above the amount field in the tree

Add block fields to the data block as required.

The screenshot shows the 'Function Generation' window. The 'Block Field Properties' tab is active. On the left, a tree view shows the hierarchy of blocks, with 'BLK\_CONTRACT\_DETAILS' expanded and 'PRTYTP' selected. The main area displays the properties for 'PRTYTP'. The 'Return Fields Mapping' table at the bottom shows the following mappings:

| Query Column  | Block Name        | Return Field Name |
|---------------|-------------------|-------------------|
| PARTY_TYPE    | BLK_PARTY_DETAILS | PRTYTP            |
| ITEM_VAL_DESC | BLK_PARTY_DETAILS | PARTYDESC         |

Fig 4.6 Attaching Block Fields and maintaining its properties

Note the following while attaching block fields to data blocks

- i) In case the field is not required in XSD, check not Required XSD
- ii) Ensure that Related Block and Field are given for Amount Fields
- iii) Minimize the use of query data sources by using DESC fields wherever possible.  
*Note: Query data sources is rarely required for a Online Form screen; as launch form can be used for query only screens*
- iv) Master block should contain reserved field names like TXNSTAT, AUTHSTAT and SUBSYSSTAT (this is not shown) as shown in the figure. These are reserved field names which are essential for an online form. These will be used by FLEXCUBE Infra while processing. Normally TXNSTAT and AUTHSTAT are added as part of the footer of the screen

| COLUMN NAME     | BLOCK FIELD NAME |
|-----------------|------------------|
| CONTRACT_STATUS | TXNSTAT          |
| AUTH_STATUS     | AUTHSTAT         |
| SUBSYSTEM_STAT  | SUBSYSSTAT       |

Function Generation

Action: Load Function Id: LCDTRONL Save XML Path: LCDTRONL\_F BROWSE

Function Type: Parent Parent Function: Parent Xml:

Function Category: Transaction Header Template: None Footer Template: None

Search: Block Field Properties

Field Name: CONSTAT Field Label: LBL\_CONSTAT DataSource: CSTBS\_CONTRACT Column Name: CONTRACT\_STATUS Data Type: Char Display Type: Text Item Type: Database Item Parent Field: Related Block: Related Field: LOV Name: Off Line LOV Name: Fieldset Name: FST\_PRODDDET

XSD Tag: CONSTAT XSD Annotation: Field Size: 1 Maximum Length: 1 Minimum Value: Maximum Value: Maximum Decimals: TextArea Rows: TextArea Columns: Default Value: Preview Value: Mask Id:

Required Visible Read Only Calendar Text Popup Edit Required Uppercase Only LOV Validation Required Input by LOV Only Not Required In Xsd Report Parameter

Custom Attributes Events Related Field

| Attribute Name | Attribute Value | Active | Position |
|----------------|-----------------|--------|----------|
|----------------|-----------------|--------|----------|

## 4.5 Screens

Design the screen layout based on the requirement

Function Generation

Action: Load Function Id: LCDTRONL Save XML Path: LCDTRONL\_F BROWSE

Function Type: Parent Parent Function: Parent Xml:

Function Category: Transaction Header Template: None Footer Template: None

Search: Screen Details

Screen Name: CVS\_MAIN Screen Title: LBL\_CONTRACT\_DETAILS Screen Size: Large Exit Button Type: Default Cancel

Main Screen Visible

| Argument Name | Source Block | Source Field | Argument Value | Target Block         | Target Field | Active |
|---------------|--------------|--------------|----------------|----------------------|--------------|--------|
| CONTREF       |              |              |                | BLK_CONTRACT_DETAILS | CONREFNO     | Yes    |
| ESN           |              |              |                | BLK_CONTRACT_DETAILS | LATEVNSEQNO  | Yes    |

Fig 4.7 Designing Screens and providing Screen Properties

Note the following while creating screens

- One Screen should be identified as the main screen.

Add Tabs, sections and partitions as per the screen design

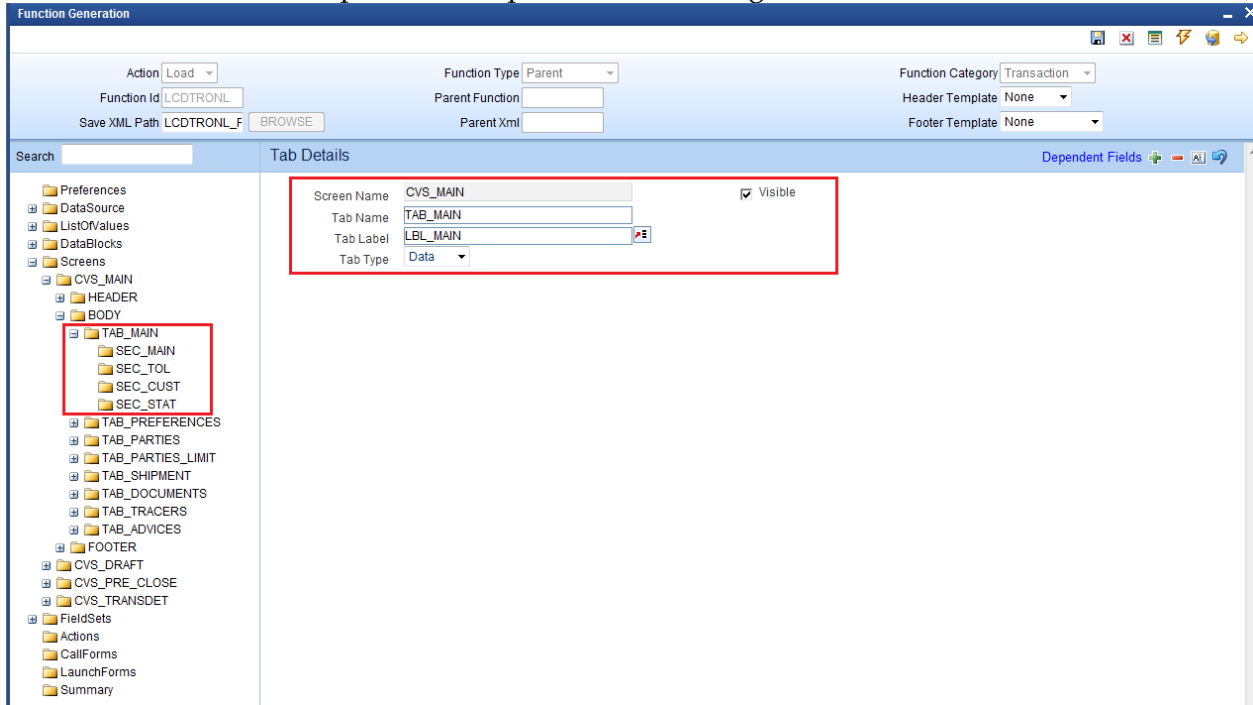


Fig 4.8 Creating Tabs and maintaining Properties

Note the following when creating tabs and sections for the screen

- If the screen does not have multiple tabs, then only the TAB\_MAIN needs to be used. TAB\_HEADER should not contain any sections in this scenario
- Normally Online forms are large screens with multiple tabs. In this case, all the tabs needs to be used .TAB\_HEADER should contain the header information. TAB\_MAIN should be the first tab in the body .Other tabs has to be added in the body portion as required
- Footers are often designed by the developer for Online forms. Provide sections in TAB\_FOOTER as required. *Note that in large screens ,footer supports 4 partitions while other portions support 3 partitions*

Function Generation

Action: Load | Function Id: LCDTRONL | Save XML Path: LCDTRONL\_F | Function Type: Parent | Parent Function: | Parent Xml: | Function Category: Transaction | Header Template: None | Footer Template: None

Search: | Section Details

Section Name: SEC\_TOL | Section Label: | Visible: ☒ | Collapse: ☐

Partition Details

| Partition SI No | Partition Name | Width | Sub-partitions |
|-----------------|----------------|-------|----------------|
| 1               | PART_TOL1      | 66    | 2              |
| 2               | PART_TOL2      | 33    |                |

Fig 4.8 Section Properties

Multiple Screens can be designed if required.

## 4.6 Field Sets

Create Field sets and attach the fields to the field sets as required

Function Generation

Action: Load | Function Id: LCDTRONL | Save XML Path: LCDTRONL\_F | Function Type: Parent | Parent Function: | Parent Xml: | Function Category: Transaction | Header Template: None | Footer Template: None

Search: | Fieldset Properties

Fieldset Name: FST\_PROD | Fieldset Label: | Data Block: BLK\_CONTRACT\_DETAILS | Multi Record: No | View Type: Single | Fieldset Height: | Screen Name: CVS\_MAIN | Screen Portion: Header | Tab Name: TAB\_HEADER | Section Name: SEC\_HEADER2 | Partition Name: PART1 | Number Of Rows: | Horizontal Fieldset: ☒ | ReadOnly: ☐ | Navigation Button: ☐ | Visible: ☒

Data Block Fields

| Fieldset Fields | Subpartition Name |
|-----------------|-------------------|
| PRDCD           |                   |
| BTN_P           |                   |
| CALLINGFND      |                   |

Fig 4.9 Field Set Properties

Note the following when attaching field to a field set

- i) If a field is not required in the screen, but kept as hidden and value defaulted; then **The field has to be made invisible and attached to a field set**. If it is not attached to any fields set, the screen html won't contain the field and may result in script error while accessing the field.

## 4.7 Actions

Mention the web service and amendable information in Actions Screen

| Web Service                         | Action Code  | Operation Code    | Action Stage Type                   | Amendables |
|-------------------------------------|--------------|-------------------|-------------------------------------|------------|
| <input checked="" type="checkbox"/> | QUERY        | QueryContract     | <input checked="" type="checkbox"/> | Amendables |
| <input checked="" type="checkbox"/> | NEW          | CreateContract    | <input checked="" type="checkbox"/> | Amendables |
| <input checked="" type="checkbox"/> | MODIFY       | ModifyContract    | <input checked="" type="checkbox"/> | Amendables |
| <input checked="" type="checkbox"/> | AUTHORIZE    | AuthorizeContract | <input type="checkbox"/>            | Amendables |
| <input checked="" type="checkbox"/> | DELETE       | DeleteContract    | <input type="checkbox"/>            | Amendables |
| <input checked="" type="checkbox"/> | CLOSE        | CloseContract     | <input type="checkbox"/>            | Amendables |
| <input checked="" type="checkbox"/> | REOPEN       | ReopenContract    | <input checked="" type="checkbox"/> | Amendables |
| <input checked="" type="checkbox"/> | REVERSE      | ReverseContract   | <input type="checkbox"/>            | Amendables |
| <input checked="" type="checkbox"/> | ROLLOVER     | RolloverContract  | <input checked="" type="checkbox"/> | Amendables |
| <input type="checkbox"/>            | CONFIRM      |                   | <input type="checkbox"/>            | Amendables |
| <input type="checkbox"/>            | LIQUIDATE    |                   | <input type="checkbox"/>            | Amendables |
| <input type="checkbox"/>            | SUMMARYQUERY |                   | <input checked="" type="checkbox"/> | Amendables |

Fig 4.10 Actions Screen

Note the following while maintaining web services and amendable information

- i) Online forms will generate Type XSD and Message XSD.  
Operation specific message xsd's will be generated.

*Example: for the example given in the figure, name of the xsd generated will be*

*LC-Contract-Types.xsd (Type XSD for LC Contract)*

*LC-CreateContract-Req-Full-MSG.xsd (Create Message XSD for LC Contract)*

*LC-CreateContract-Req-IO-MSG.xsd (Create Message XSD for LC Contract)*

*LC-CreateContract-Res-Full-MSG.xsd (Create Message XSD for LC Contract)*

*LC-CreateContract-Res-PK-MSG.xsd (Create Message XSD for LC Contract)*

- ii) Operation Id and Operation Code need be maintained for the above mentioned reason

- iii) Amendable information has to be maintained similar to any other function ids.

## 4.8 Launch Forms

Launch Forms can be attached to Online form screen.

The screenshot shows the 'Function Generation' window. On the left is a tree view with folders: Preferences, DataSource, ListOfValues, DataBlocks, Screens, FieldSets, Actions, CallForms, **LaunchForms** (highlighted with a red box), and Summary. The main area is titled 'Launch Form Details'. It contains a table with columns 'Function ID' and 'Active'. The table has three rows: CSDEVENT, MSDALMSG, and MSDMSPRV. The 'MSDMSPRV' row is selected with a checkmark. To the right of the table is a 'Screen Arguments' button with a plus icon. At the top of the window, there are fields for 'Action' (Load), 'Function Id' (LCDTRONL), 'Save XML Path' (LCDTRONL\_F), 'Function Type' (Parent), 'Parent Function', 'Parent Xml', 'Function Category' (Transaction), 'Header Template' (None), and 'Footer Template' (None).

| Function ID | Active |
|-------------|--------|
| CSDEVENT    | Yes    |
| MSDALMSG    | Yes    |
| MSDMSPRV    | Yes    |

Screen Arguments should be maintained for the launch form to query the proper contract record from the main online functions.

This screenshot shows the same 'Function Generation' window as before, but with the 'Call Form Arguments' dialog box open. The dialog has a 'Populate' button and a 'Reset' button. It contains a table with columns: 'Argument Name', 'Source Block', 'Source Field', and 'Argument Value'. There are two rows: one for 'CONTRF' with 'BLK\_CONTRACT\_DETAILS' as the source block and 'CONREFNO' as the source field; and another for 'ACTION\_CODE' with 'EXECUTEQUERY' as the argument value. The 'CONTRF' row is selected. The 'Screen Arguments' button in the background is also highlighted with a red box. The 'LaunchForms' folder in the left tree view remains highlighted.

| Argument Name | Source Block         | Source Field | Argument Value |
|---------------|----------------------|--------------|----------------|
| CONTRF        | BLK_CONTRACT_DETAILS | CONREFNO     |                |
| ACTION_CODE   |                      |              | EXECUTEQUERY   |

Process to attach launch forms is similar to any other function Id's.

## 4.9 Call Forms

Call forms can be attached to Online form. Each call form should be mapped to Parent Data Block, Parent Data Source and proper relations should be maintained with parent data source of main online form.

The screenshot shows the 'Function Generation' window. The 'Function Type' is set to 'Parent'. The 'Function Id' is 'LCDTRONL'. The 'Parent Function' is empty. The 'Parent Xml' is empty. The 'Function Category' is 'Transaction'. The 'Header Template' is 'None'. The 'Footer Template' is empty. The 'Save XML Path' is 'LCDTRONL\_F'. The 'Call Form Details' tab is selected. The 'Call Form Details' table is shown below.

| Function ID | Parent Data Block    | Parent Data Source    | Relation                   | Dependent Fields | Relation Type |
|-------------|----------------------|-----------------------|----------------------------|------------------|---------------|
| CFCTRCOM    | BLK_CONTRACT_DETAILS | LCTBS_CONTRACT_MASTER | LCTBS_CONTRACT_MASTER.CONT |                  | One To One    |
| CFCTRCHG    | BLK_CONTRACT_DETAILS | LCTBS_CONTRACT_MASTER | LCTBS_CONTRACT_MASTER.CONT |                  | One To One    |
| ISCTRSTL    | BLK_CONTRACT_DETAILS | LCTBS_CONTRACT_MASTER | LCTBS_CONTRACT_MASTER.CONT |                  | One To One    |
| LCCTRCLT    | BLK_CONTRACT_DETAILS | LCTBS_CONTRACT_MASTER | LCTBS_CONTRACT_MASTER.CONT |                  | One To One    |
| TACTRTAX    | BLK_CONTRACT_DETAILS | LCTBS_CONTRACT_MASTER | LCTBS_CONTRACT_MASTER.CONT |                  | One To One    |
| CSCTRLNK    | BLK_CONTRACT_DETAILS | LCTBS_CONTRACT_MASTER | LCTBS_CONTRACT_MASTER.CONT |                  | One To One    |
| CSCTRUDF    | BLK_CONTRACT_DETAILS | LCTBS_CONTRACT_MASTER | LCTBS_CONTRACT_MASTER.CONT |                  | One To Many   |
| MICTRMIS    | BLK_CONTRACT_DETAILS | LCTBS_CONTRACT_MASTER | LCTBS_CONTRACT_MASTER.CONT |                  | One To One    |
| LCCBCLNK    | BLK_CONTRACT_DETAILS | LCTBS_CONTRACT_MASTER | LCTBS_CONTRACT_MASTER.CONT |                  | One To One    |
| CSCRSPT     | BLK_CONTRACT_DETAILS | LCTBS_CONTRACT_MASTER | LCTBS_CONTRACT_MASTER.CONT |                  | One To One    |
| BCCTRPRF    | BLK_CONTRACT_DETAILS | LCTBS_CONTRACT_MASTER | LCTBS_CONTRACT_MASTER.CONT |                  | One To One    |
| CSCOFAC     | BLK_CONTRACT_DETAILS | LCTBS_CONTRACT_MASTER | LCTBS_CONTRACT_MASTER.CONT |                  | One To One    |
| BCCBRDET    | BLK_CONTRACT_DETAILS | LCTBS_CONTRACT_MASTER | LCTBS_CONTRACT_MASTER.CONT |                  | One To One    |
| CSCDOCTR    | BLK_CONTRACT_DETAILS | LCTBS_CONTRACT_MASTER | LCTBS_CONTRACT_MASTER.CONT |                  | One To One    |
| LCCILUTL    | BLK_CONTRACT_DETAILS | LCTBS_CONTRACT_MASTER | LCTBS_CONTRACT_MASTER.CONT |                  | One To One    |

Screen Arguments should be given to each callform. So that the call form will display the respective data of calling main function.

Dependant Fields are required to re default the call form values when the user changes input data in the main form.

Each of the subsystem pickup logic will have to be coded by the developer in release specific packages. Processing logic (sub system pickup) for the attached call forms has to be called from the main form package.

### 4.9.1 Sub System Pickup/Processing

Subsystem pickup refers to the process of picking up the values in sub systems.

Normally values in sub systems will be defaulted based on the data given in the main screen of the online form .

#### i) Defaulting of sub system

After providing values in the main screen ,user may click on any sub system to view or change the value.

On clicking the sub system for the first time ,sub system values will be defaulted based on the values provided in the main screen . Action code passed will be **SUBSYSPKP** .

The code for defaulting will have to be written by the developer in corresponding hook packages in function *Fn\_Post\_Subsys\_Pickup*

*In this case SUBSYSSTAT for all subsystems will go as 'D' and processing done based on this flag for each sub system (call form). Note that SUBSYSPKP action will default values for all subsystems and not only the sub system being launched*

*Example:*

*MICTRMIS:D;ISCTRSTL:D;TACTRTAX:D;CSCTRUDF:D;CFCTROCH:D;CSCTRADV:D;FTCCGCLM:D;*

If user saves the contract without visiting any call forms, then all the sub systems will be defaulted before saving

**ii) Uploading of sub system**

If after launching the subsystem with defaulted values; User changes the value in subsystem; the new user input values has to be uploaded to the system.

Hence while saving , *the subsystems which has been modified by user will be uploaded while others will be defaulted.*

*In this case SUBSYSSTAT for the subsystem which has been modified will go as 'U'. Developer has to write code for processing based on the flag*

*Example: if user changes MIS details (MICTRMIS) from what was defaulted; then SUBSYSSTAT will go as*

*MICTRMIS:U;ISCTRSTL:D;TACTRTAX:D;CSCTRUDF:D;CFCTROCH:D;CSCTRADV:D;FTCCGCLM:D;*

**iii) Re defaulting of sub system**

After launching and changing subsystem values; if user changes any values in main screen which are dependent field for the subsystem : subsystem values will have to be defaulted again based on the new main screen values . Hence the sub system will be re defaulted. In this case value entered by the user in sub system will be lost .

*In this case SUBSYSSTAT for the subsystem whose dependent fields has been modified will go as 'R'. Developer has to write code for processing based on the flag*

*Example: In a Funds Transfer Contract Input Screen , assume that charge subsystem(CFCTROCH) is dependent on the values entered for debit and credit account. After launching the sub system and changing the charges manually; if user changes the account again the charges will have to re defaulted. The manually entered charges will not be considered. SUBSYSSTAT will go as*

*MICTRMIS:U;ISCTRSTL:D;TACTRTAX:D;CSCTRUDF:D;CFCTROCH:R;CSCTRADV:D;FTCCGCLM:D;*

*Values for other subsystems will depend on each of their dependencies .*

## 4.10 Summary

Summary screens can be designed for Online Form if required

Function Generation

Action

Load

Function Id

LCDTRONL

Save XML Path

LCDTRONL\_F

BROWSE

Function Type

Parent

Parent Function

Parent Xml

Function Category

Transaction

Header Template

None

Footer Template

Search

Summary Details

Title

LBL\_SUMMARY

Data Blocks

BLK\_SUMMARY\_DETAIL

Data Source

LCVWS\_FCJ\_CONTRACT\_SUM

Summary Type

Summary

Summary Screen Size

Medium

Default Where Clause

MODULE\_CODE='LC'

Default Order By

Multi Branch Where Clause

MODULE\_CODE = 'LC' AND EXISTS (SEL

Main Summary Screen

WebServices Required

☐

Data Block Fields

Custom Buttons

Fields Ordering

Data Block Fields

CLOSDT  
SETLMTH  
EFFDT  
CIFID  
MAXCONTAMT  
MAXLIABAMT  
CURRAVAIL  
OSLIAB

Fields Selected

☐ AUTHSTAT  
☐ CONSTAT  
☐ CONREFNO  
☐ PRDCD  
☐ CONTCCY  
☐ CONTAMT  
☐ USEREFNO  
☐ EXTREFNO

Query

☒  
☒  
☒  
☒  
☒  
☒  
☐  
☐

LOV Name

## 4.11 Preview

The figure shows the preview of the Online form Input screen developed

The screenshot displays a web-based form for 'LC Details'. The interface includes a top navigation bar with tabs: Main, Preferences, Parties, Parties Limits, Shipment, Documents, Tracers, and Advices. The 'Main' tab is active.

**Header Section:**

- Product Code \* (Text field with 'P' dropdown)
- Product Description (Text field)
- Product Type (Dropdown menu)
- Contract Reference (Text field)
- User Reference (Text field)
- Source Reference (Text field)
- Operation Code \* (Dropdown menu)
- Source Code (Text field with 'FLEXCUBE' value)
- Version Number (Text field) and Of (Text field) with navigation arrows.

**LC Details Section:**

- Left Column:** Currency \*, Contract Amount \*, Positive Tolerance, Negative Tolerance, Max Amount, Liability Tolerance, Liability Amount, Tolerance Text (Dropdown).
- Middle Column:** Customer \*, Customer Name, Party Type \*, Dated, Customer Reference, License Expiry Date, Amount, Liability.
- Right Column:** Issue Date, Effective Date, Tenor, Expiry Date, Expiry Place, Auto Closure (Checkbox), Closure Date, Stop Date, Pre-Advice Date, Reference To Pre-advice.

**Credit Section:**

- Type (Dropdown), Mode (Dropdown), Credit Available With (Text field), Details (Text field).

**Guarantee Details Section:**

- Type of guarantee (Text field), Guarantee (Dropdown).

**Revolving Detail Section:**

- Revolves in (Dropdown), Units (Dropdown), Frequency (Text field), Next Reinstatement Date (Text field), Automatic Reinstatement (Checkbox), Cumulative (Checkbox), Remarks (Text field with 'Default' dropdown), Loan for Collateral (Checkbox), Partial Closure (Checkbox).

**Reimbursement Undertaking Section:**

- Undertaking Expiry Date (Text field), Undertaking Amount (Text field), Availed Undertaking Amount (Text field).

**Status Section:**

- Maker, Checker, Date Time, Status, Authorization Status.

**Footer Section:**

- Navigation links: Drafts, Commission, Charges, Settlement, Tax, Collateral, Events, Linkage Details, Fields, MIS, Transfer Details, BC Linkages, Split Settlement, Loan Preference, Brokerage, All Messages, Documents, Message Preview, Import License.
- Buttons: Exit.

The figure shows the preview of the Online form Summary screen developed

Fig 4.10 Online Form Summary Screen Preview

Generate the units for Online form and deploy them in the FLEXCUBE server for unit testing.

## 5. Generated Units

The following units will be generated for a Online Form screen.

Refer document on generated units on detailed explanation on the same

### 5.1 Front End Units

#### 5.1.1 Language xml

This file is an XML markup of presentation details, for the designed Online Form specific to a language.

*Example - LCDTRONL.xml ( uixml for LC Contract Screen)*

### 5.1.2 SYS JavaScript File

This JavaScript file mainly contains a list of declared variables required for the functioning of the screen

*Example – LCDTRONL\_SYS.js* ( JS for LC Contract Screen)

### 5.1.3 Release Type Specific JavaScript File

This file won't be generated by the Tool. It has to be manually written by the developer if he has to write any code specific in that release

*Example – LCDTRONL\_KERNEL.js* ( JS for KERNEL Release)

*Example – LCDTRONL\_CLUSTER.js* ( JS for CLUSTER Release)

*Example – LCDTRONL\_CUSTOM.js* ( JS for CUSTOM Release)

## 5.2 Data Base Units

### 5.2.1 Static Scripts

The following static scripts generated are required for the proper functioning of a Online Form screen. Refer document on generated units for detailed explanation

### 5.2.2 System Packages

Main package would be generated by the Tool and should not be modified by the developer.

*Example – Lcpks\_Lcdtronl\_Main.spc,*

*Lcpks\_Lcdtronl\_Main.sql* (Main Package for LC Contract)

Main package contains functions for :

- Converting Ts to PL/SQL Composite Type
- Calling fn\_main.
- Resolve Ref Numbers (fn\_resolve\_ref\_numbers)
- Mandatory checks (fn\_check\_mandatory).
- Product Default (fn\_product\_default)
- Subsystem Pickup(fn\_subsys\_pickup)
- Enriching (fn\_enrich)
- Default and validation(fn\_default\_and\_validate)
- Uploading into DB tables(fn\_upload\_db)
- Processing the contract input values(fn\_process)
- Querying(fn\_query)
- Converting the Modified Composite Type again to TS

Except the functions for type conversions, others functions calls the respective hook functions in hook packages of the Online forms. Thus no processing logic within the main package is used

But the package contains many other system generated functions for operations like

- Mandatory checks(fn\_sys\_check\_mandatory)
- Default and validation(fn\_sys\_default\_and\_validate)
- Uploading to DB(fn\_sys\_upload\_db)
- Query operation (fn\_sys\_query) etc

These functions are not called anywhere in the package. These functions if required can be called by the developer from the release specific package. Otherwise developer can write his own logic for the same in the Hook Packages

### 5.2.3 Hook Packages

Release specific packages will be generated based on the release type (KERNEL.CLUSTER or CUSTOM). Developer can add his code in the release specific hook package.

*Example* - Lcpks\_Lcdtronl\_Kernel.spc, Lcpks\_Lcdtronl\_Kernel.sql (Kernel Package)  
Lcpks\_Lcdtronl\_Cluster.spc, Lcpks\_Lcdtronl\_Cluster.sql (Cluster Package)  
Lcpks\_Lcdtronl\_Custom.spc, Lcpks\_Lcdtronl\_Custom.sql (Custom Package)

## 5.3 Other Units

### 5.3.1 Xsd

Only Type XSD and message XSD will be generated for a Online Form function Id. This type xsd will be used in the type xsd of any function which uses the particular Online form.

*Example* - LC-Contract-Types.xsd (Type XSD for LC Contract)  
LC-CreateContract-Req-Full-MSG.xsd (Create Message XSD for LC Contract)  
LC-CreateContract-Req-IO-MSG.xsd (Create Message XSD for LC Contract)  
LC-CreateContract-Res-Full-MSG.xsd (Create Message XSD for LC Contract)  
LC-CreateContract-Res-PK-MSG.xsd (Create Message XSD for LC Contract)

## 6. Extensible Development

Developer can add his code in hook packages and release specific JavaScript file.

### 6.1 Extensibility in JavaScript Coding

For release specific JavaScript coding, code has to be written in release specific JavaScript file.

It follows the naming convention as : (Function Id)\_(Release Type).js

*Example: Code in LCDTRONL\_CLUSTER.js is exclusive to cluster release*

This JavaScript file allows developer to add functional code and is specific to release.

The functions in this file are generally triggered by screen events. A developer working in cluster release would add functions based on two categories:

- Functions triggered by screen loading events  
*Example: `fnPreLoad_CLUSTER()`, `fnPostLoad_CLUSTER()`*
- Functions triggered by screen action events  
*Example: `fnPreNew_CLUSTER ()`, `fnPostNew_CLUSTER ()`*

## 6.2 Extensibility in Backend Coding

For online forms, generated code does not provide any business logic . Insert statements won't be present as part of generated code in online packages. Developer has to write the business logic in release specific packages (or make call to server functions from release specific packages) .

Hooks will be provided in the following stages

- Resolving reference numbers
- Checking mandatory fields
- Defaulting and validating
- Uploading to db
- Process
- Subsystem pickup
- Enrich
- Product Default
- Query

Note that the system generated code for uploading; defaulting etc (*`fn_sys_default_and_validate`, `fn_sys_upload_db` etc*) won't be called by the main package in online flow. If it is required, developer has to call it explicitly from release specific packages.

Note that in online flow, upload to base tables happens first and processing is done on the inserted data after uploading. After processing , the response type will be build

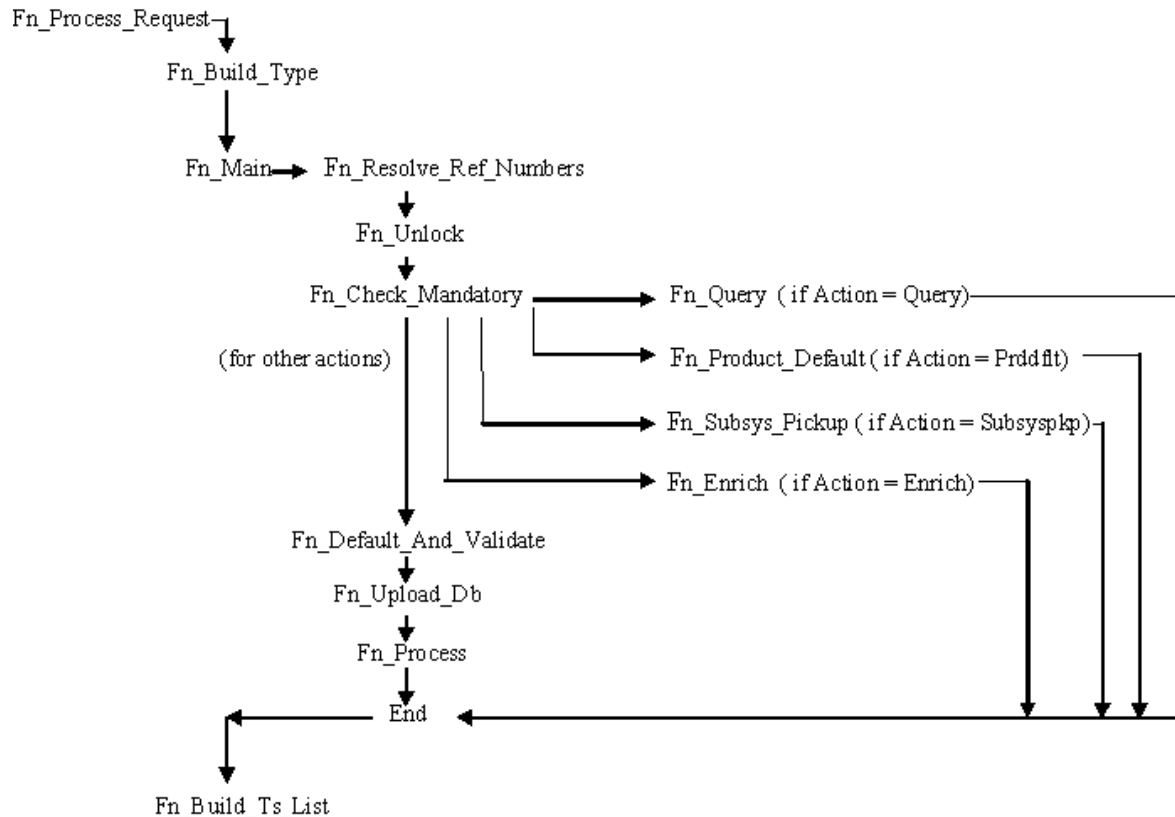


Fig 4.10 Flow of control in an Online main package

Release specific code has to be written in the Hook Packages generated. Different functions available in the Hook Package of a Online Form are:

1) **Skip Handler : Pr\_Skip\_Handler**

This can be used to skip the logic written in another release.

*Example: logic written in KERNEL release can be skipped in CLUSTER release*

2) **Fn Main**

This is called from the fn\_main in main package.

3) **Fn\_pre\_resolve\_ref\_numbers**

4) **Fn\_post\_resolve\_ref\_numbers**

This function validates the reference number. It is called from fn\_resolve\_ref\_numbers of the main package

5) **Fn\_pre\_unlock**

6) **Fn\_post\_unlock**

This function holds the contract level validations and modification logic for existing contract. It is called from fn\_unlock of main package.

7) **Fn\_pre\_check\_mandatory**

8) **Fn\_post\_check\_mandatory**

Any mandatory checks can be validated here. It is called from fn\_chchk\_mandatory of main package.

**9) Fn\_pre\_query**

**10) Fn\_post\_query**

Any specific logic while querying can be written in these functions. It is called from fn\_query of the main package

**11) Fn\_pre\_product\_default**

**12) Fn\_post\_product\_default**

This function has the logic to default the values for the contract based on the product maintenance. It is called from fn\_product\_default of main package.

**13) Fn\_pre\_subsys\_pickup**

**14) Fn\_post\_subsys\_pickup**

This function does the subsystem pickup for the subsystem's (call form's) as per product maintenance for the contract. It is called from fn\_subsys\_pickup of main package.

**15) Fn\_pre\_enrich**

**16) Fn\_post\_enrich**

After product default, user can default others values. That logic can be put here. It is called from fn\_enrich of main package.

**17) Fn\_pre\_default\_and\_validate**

**18) Fn\_post\_default\_and\_validate**

Any release specific logic for defaulting and validation can be written here . It is called from the fn\_default\_and\_validate in the main package.

**19) Fn\_pre\_upload\_db**

**20) Fn\_post\_upload\_db**

Any logic while uploading data to tables can be written here. It is called from fn\_upload\_db of main package.

**21) Fn\_pre\_process**

**22) Fn\_post\_process**

These hook functions are specific to transaction online form screens. This function should have the call to all the server functions which process the input data for the contract as per the functionality. These are called from fn\_process of the main package.



Development of Online Forms  
[May] [2020]  
Version 14.4.0.0.0

Oracle Financial Services Software Limited  
Oracle Park  
Off Western Express Highway  
Goregaon (East)  
Mumbai, Maharashtra 400 063  
India

Worldwide Inquiries:  
Phone: +91 22 6718 3000  
Fax: +91 22 6718 3001  
[www.oracle.com/financialservices/](http://www.oracle.com/financialservices/)

Copyright © 2007, 2020, Oracle and/or its affiliates. All rights reserved.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

**U.S. GOVERNMENT END USERS:** Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate failsafe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

This software or hardware and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.