

Gateway Application Deployment in WebSphere  
Oracle FLEXCUBE Investor Servicing  
Release 14.4.0.0.0  
[July] [2020]



---

# Table of Contents


- 1. FCIS GATEWAY APPLICATION FULL DEPLOYMENT ..... 1-1
  - 1.1 GATEWAY EJB APPLICATION FULL DEPLOYMENT ..... 1-1
- 2. GATEWAY MDB APPLICATION FULL DEPLOYMENT ..... 2-1
- 3. GATEWAY HTTP SERVLET FULL DEPLOYMENT ..... 3-1
- 4. FCIS WEB SERVICES DEPLOYMENT ..... 4-1

---

# 1. FCIS Gateway Application Full Deployment


## 1.1 Gateway EJB Application FULL Deployment

1. Launch Oracle FLEXCUBE Investor Servicing Installer.
2. Click on “Next” to display the screen below.

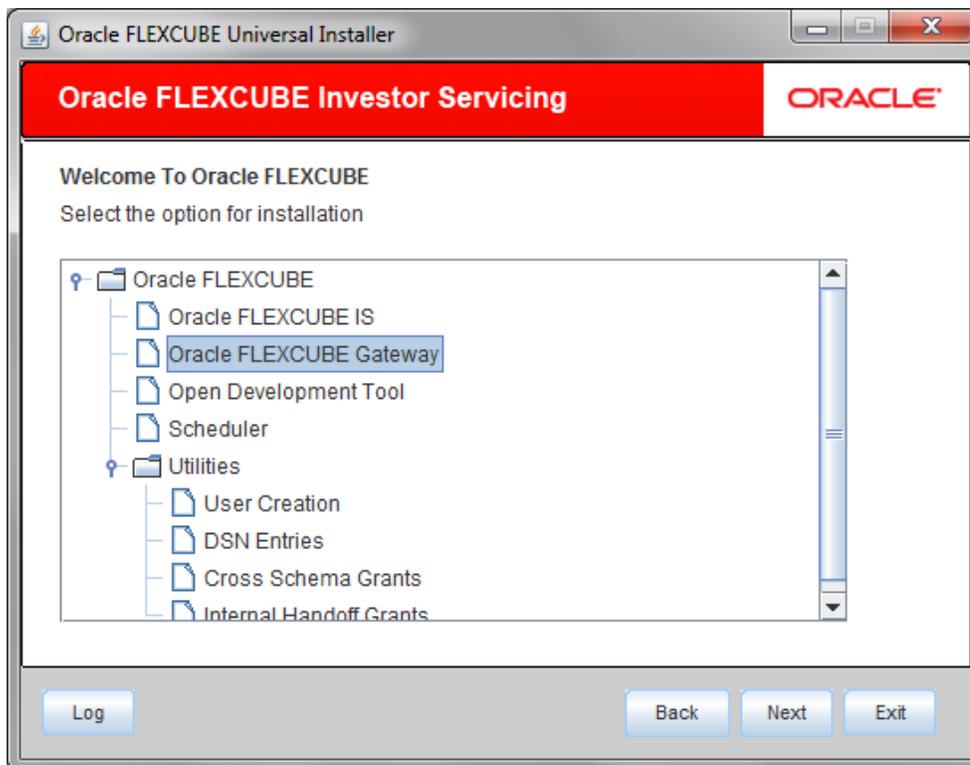


3. Select “Gateway”.

4. Click on “Next” to display the screen below.

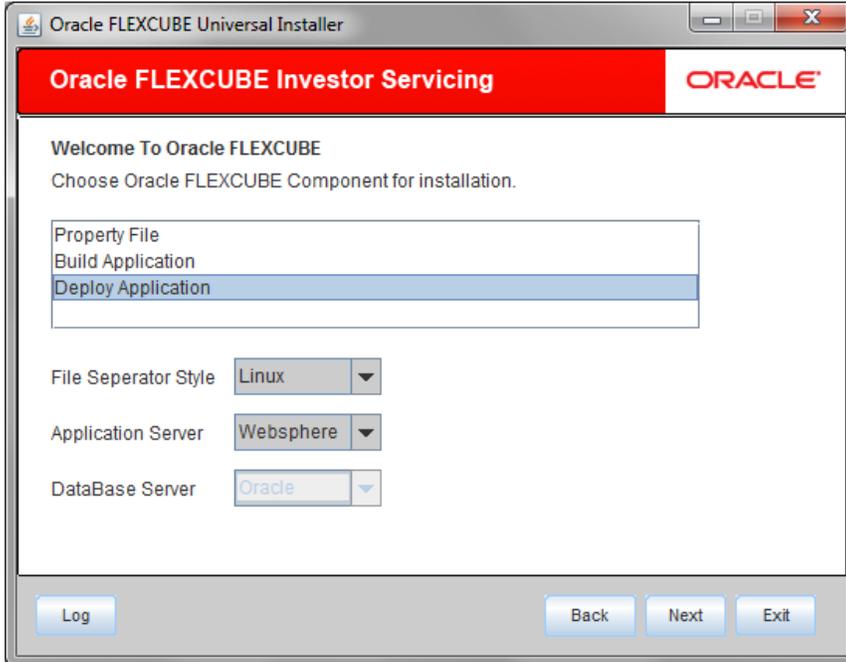

5. Select “Deploy Application”.
6. Choose the appropriate Server’s Operating System from the drop down.
7. Choose “Websphere” from the Application Server drop down.
8. Click on “Next” to display the screen below.

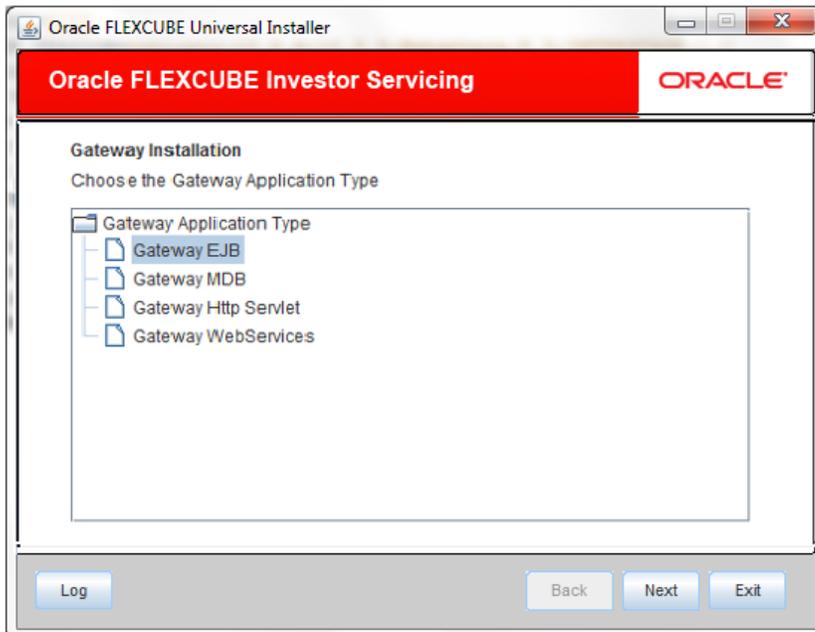

9. Select 'Gateway EJB', and Click on "Next" to display the screen below.

Name	Value
Admin IP	Not Applicable
Admin Port	Not Applicable
Admin Username	websphere
Admin Password	.....

**Admin IP**

Not applicable.

**Admin Port**

Not applicable.

**Admin UserName**

Please provide the appropriate Admin Username of the websphere application server.

**Admin Password**

Please provide the appropriate Admin Password of the websphere application server.


**Type of Deployment**

Choose "Full Deployment".

10. Click on "**Test Connection**" to test the connection with the application server. On successful connection, the following message will be displayed.



11. Click on “OK” and click on “Next” to display the screen below.

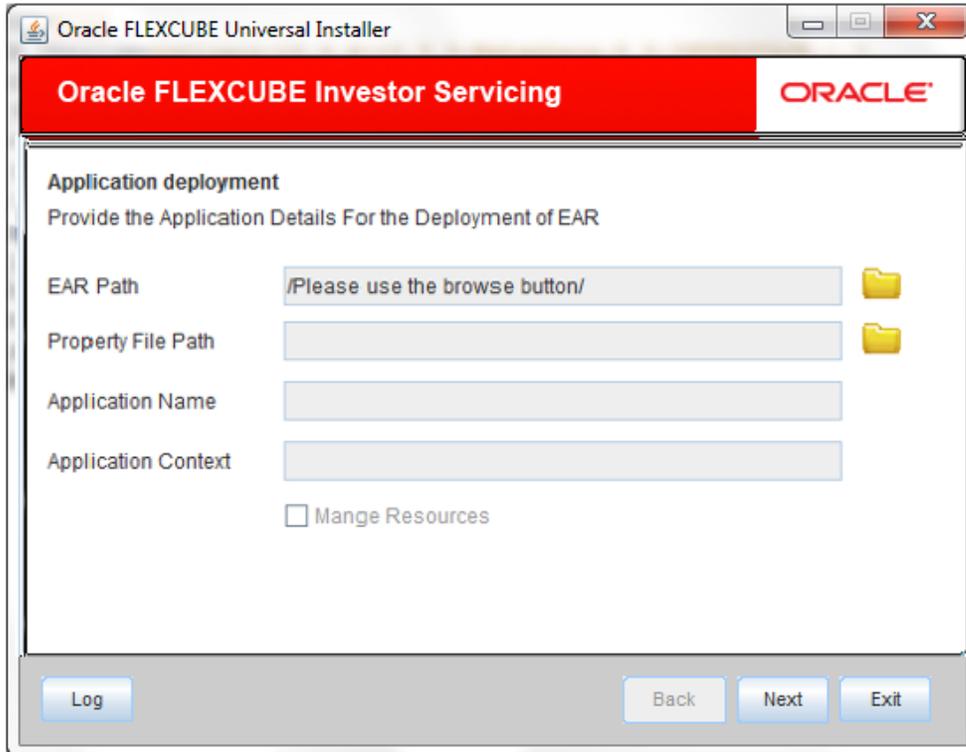

### **EAR Path**

Please select the application EAR to be deployed using the browse button.

Note: The Application EAR path cannot be copied and pasted on to the text box, thereby demanding the use of the browse button to the select the EAR.

### **Property File Path**

Please select the appropriate path to the external properties file.

If the properties file is internal to the application EAR, it would be fetched on selection of the EAR and will be in a non-editable state.

### **Application Name**

Application Name would be fetched on selection of the EAR and will be in a non-editable state.

### **Application Context**

Not applicable.

### **Manage Resources**

Not Applicable for Websphere application server.

12. Click on “Next” to display the screen below.

Oracle FLEXCUBE Universal Installer

**Oracle FLEXCUBE Investor Servicing** ORACLE

**Application deployment**  
Provide the Application Details For the Deployment of EAR

Application Name

Status

Cell Name

Node Name

Target Type

Server Name

Cluster Name

**Application Name**

Not applicable for application full deployment.

**Status**

Not applicable for application full deployment.

**Cell Name**

Please provide the appropriate Cell Name.

**Node Name**

Please provide the appropriate Node Name.

**Target Type**

Please choose the appropriate target type.

**Server Name**


Please provide the appropriate Server Name if the selected Target Type is “**Server**”.

**Cluster Name**

Please provide the appropriate Cluster Name if the selected Target Type is “**Cluster**”.



Note: The values fed in the above screen are not validated at the screen level as a result of a limitation and hence, please provide accurate information.

13. Click on “Next” to display the screen below.

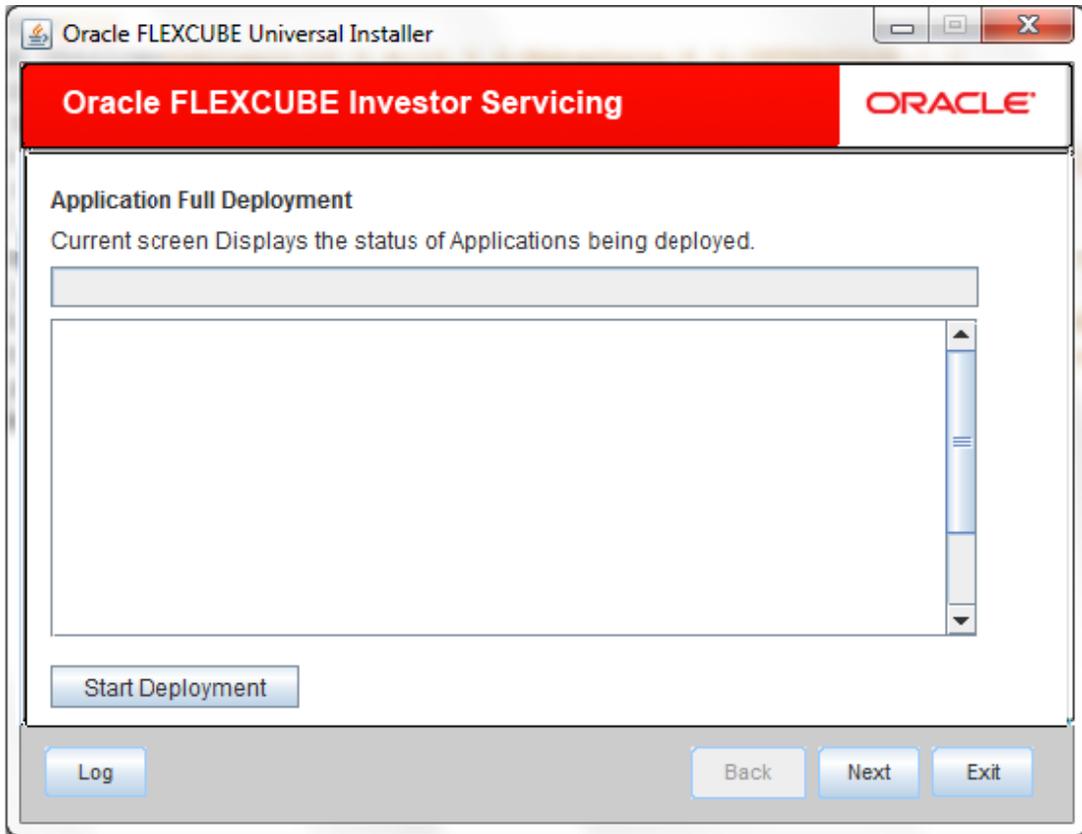


14. Click on “**Start Deployment**” to begin the process of application deployment.

15. On successful deployment, you will get the following message and the screen is expected to look like below.

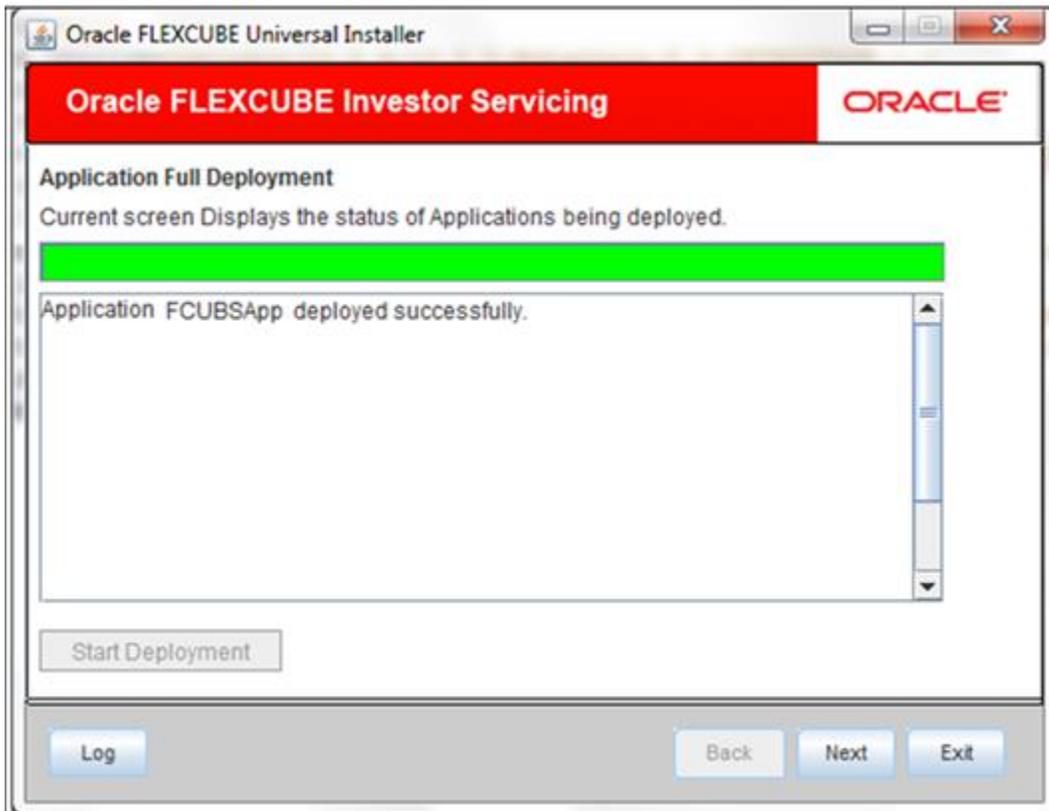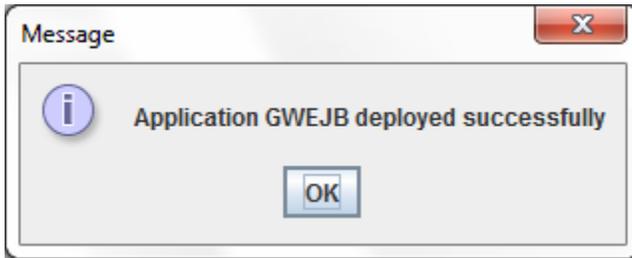


16. If the deployment is not successful, the 'Undeploy' button will be enabled.

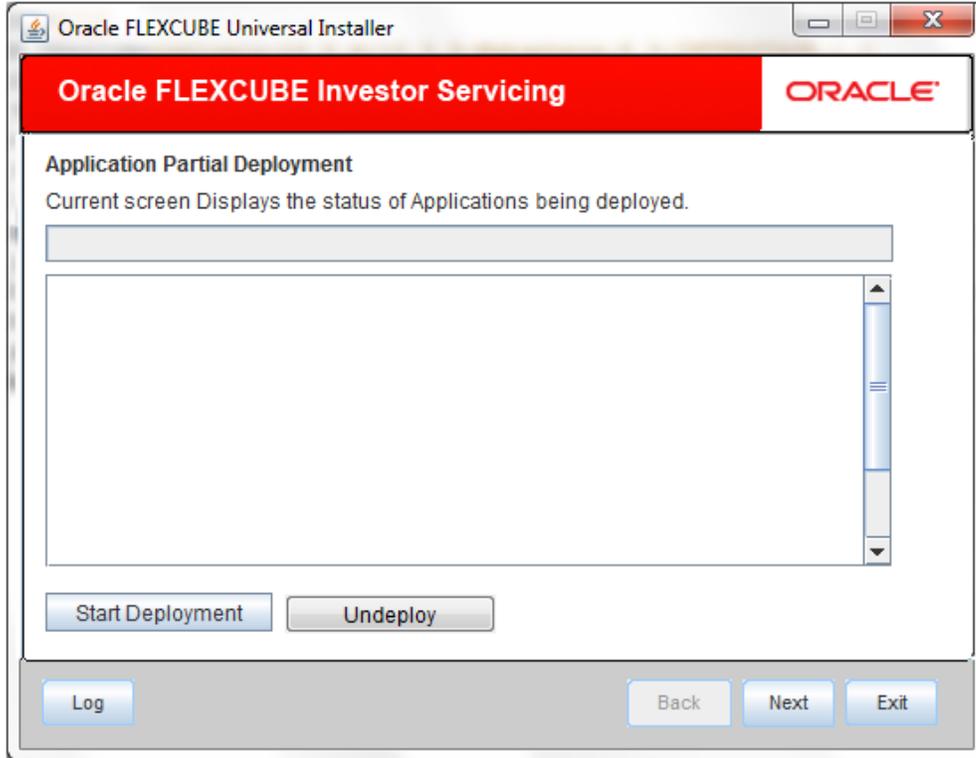


17. Click 'Undeploy' for undeploying the partially deployed EAR from the server.

## 2. Gateway MDB Application FULL Deployment


1. Launch Oracle FLEXCUBE Investor Servicing Installer.
2. Click on “Next” to display the screen below.

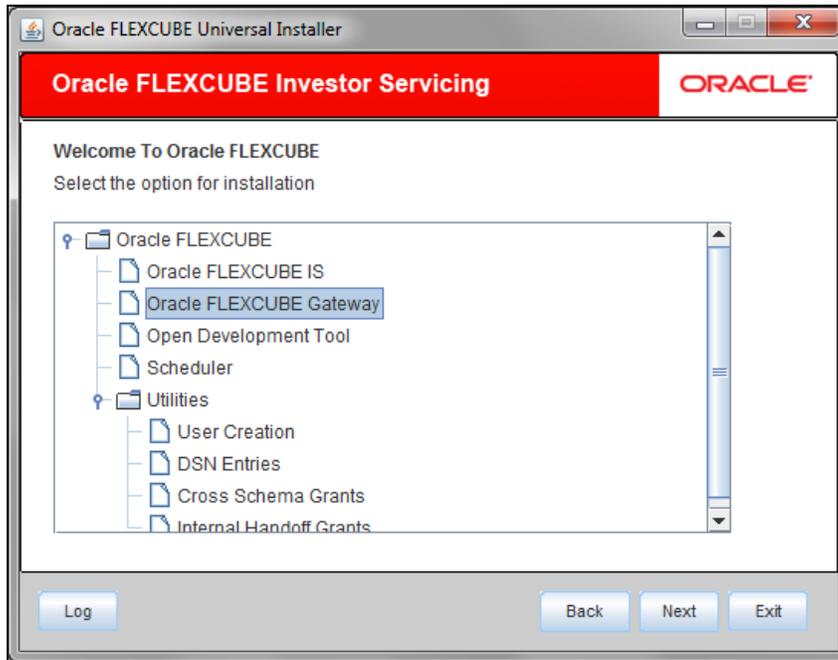

3. Select “Gateway”.
4. Click on “Next” to display the screen below.

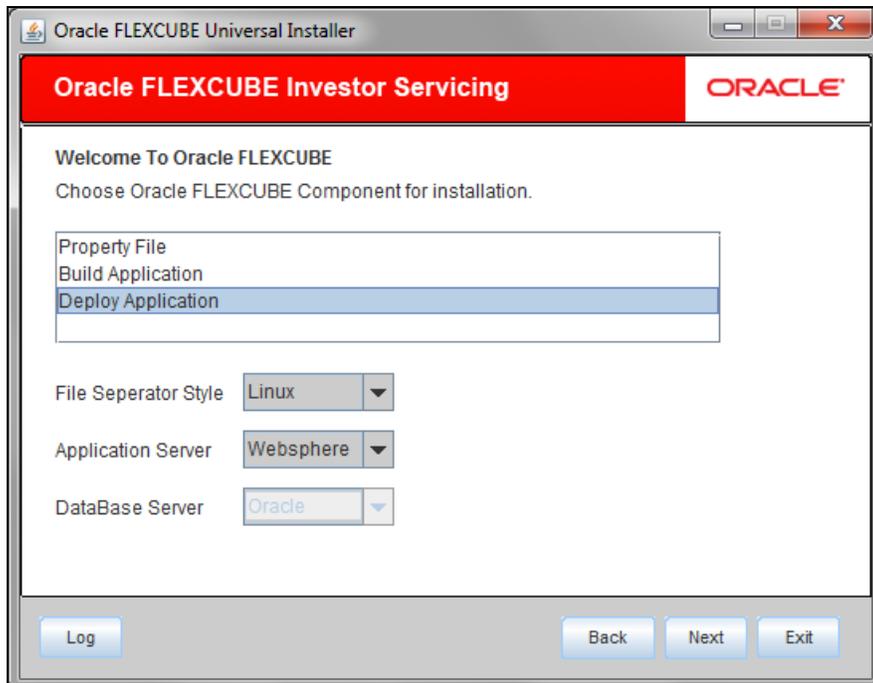


5. Select “Deploy Application”.
6. Choose the appropriate Server’s Operating System from the drop down.
7. Choose “Websphere” from the Application Server drop down.
8. Click on “Next” to display the screen below.

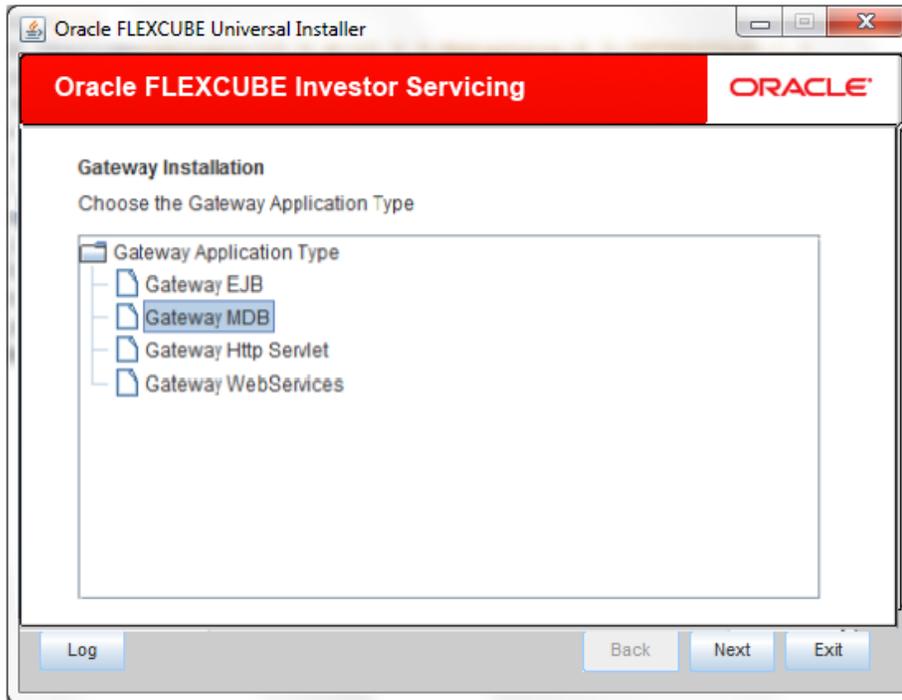

9. Select '**Gateway MDB**', and Click on “Next” to display the screen below.

**Admin IP**

Not applicable.

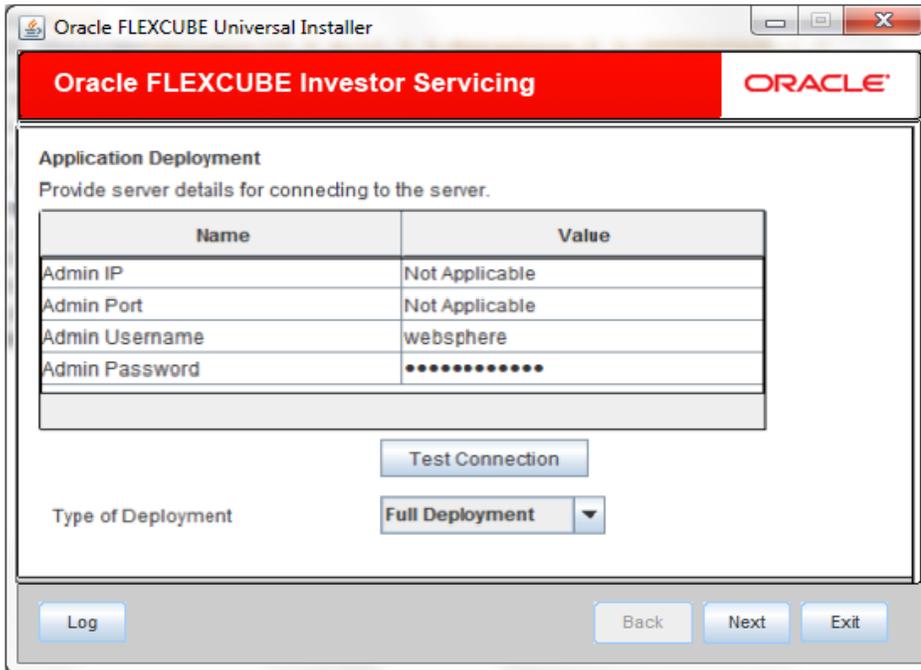

**Admin Port**

Not applicable.

**Admin UserName**

Please provide the appropriate Admin Username of the websphere application server.

**Admin Password**

Please provide the appropriate Admin Password of the websphere application server.


**Type of Deployment**

Choose "Full Deployment".

1. Click on “**Test Connection**” to test the connection with the application server. On successful connection, the following message will be displayed.



2. Click on “OK” and click on “Next” to display the screen below.

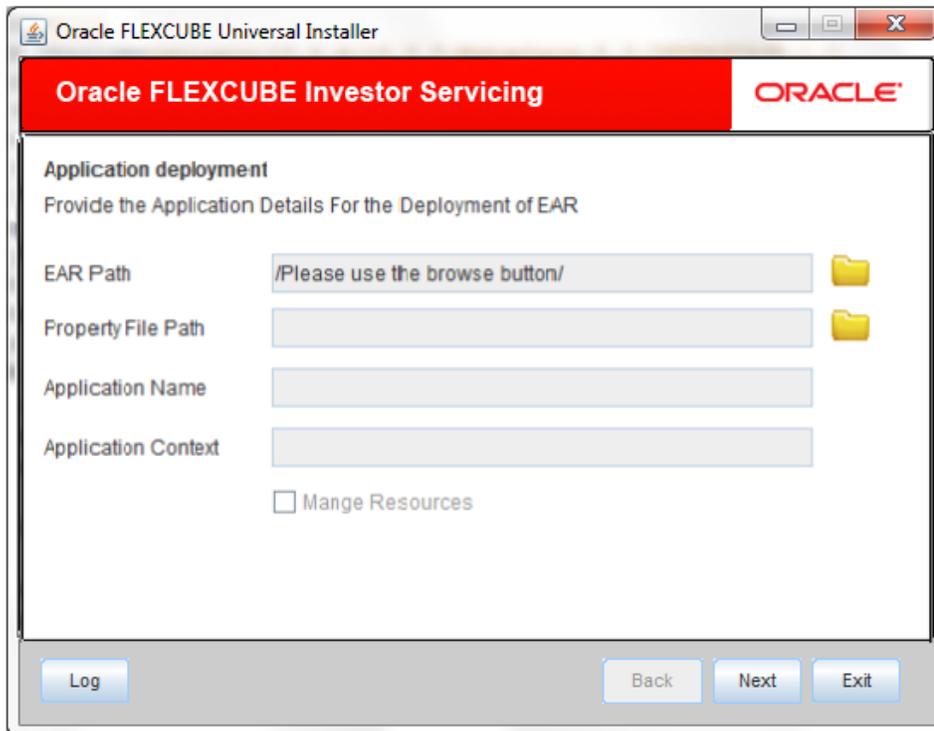

### **EAR Path**

Please select the application EAR to be deployed using the browse button.

Note: The Application EAR path cannot be copied and pasted on to the text box, thereby demanding the use of the browse button to select the EAR.

### **Property File Path**

Please select the appropriate path to the external properties file.

If the properties file is internal to the application EAR, it would be fetched on selection of the EAR and will be in a non-editable state.

### Application Name

Application Name would be fetched on selection of the EAR and will be in a non-editable state.

### Application Context

Not applicable.

### Manage Resources

Not Applicable for websphere application server.

3. Click on “Next” to display the screen below.

Oracle FLEXCUBE Universal Installer

**Oracle FLEXCUBE Investor Servicing** ORACLE

**Application deployment**  
Provide the Application Details For the Deployment of EAR

Application Name  Get Details

Status

Cell Name

Node Name

Target Type

Server Name

Cluster Name

Log Back Next Exit

### Application Name

Not applicable for application full deployment.

### Status

Not applicable for application full deployment.

### Cell Name

Please provide the appropriate Cell Name.

### Node Name

Please provide the appropriate Node Name.

## Target Type

Please choose the appropriate target type.

## Server Name


Please provide the appropriate Server Name if the selected Target Type is “**Server**”.

## Cluster Name

Please provide the appropriate Cluster Name if the selected Target Type is “**Cluster**”.



Note: The values fed in the above screen are not validated at the screen level as a result of a limitation and hence, please provide accurate information.

4. Click on “Next” to display the screen below.

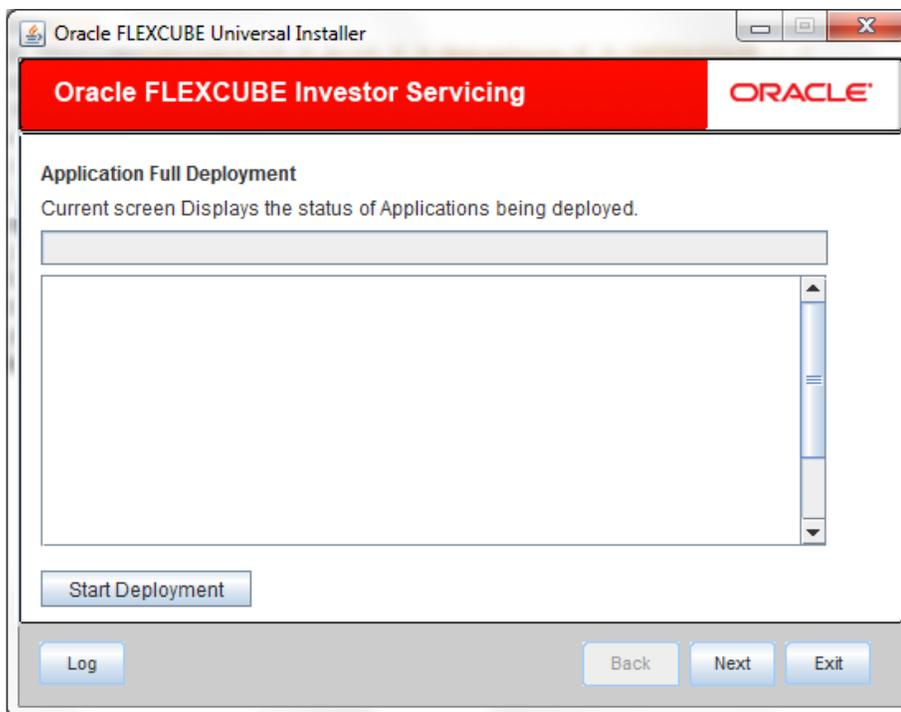


5. Click on “**Start Deployment**” to begin the process of application deployment.

6. On successful deployment, you will get the following message and the screen is expected to look like below.

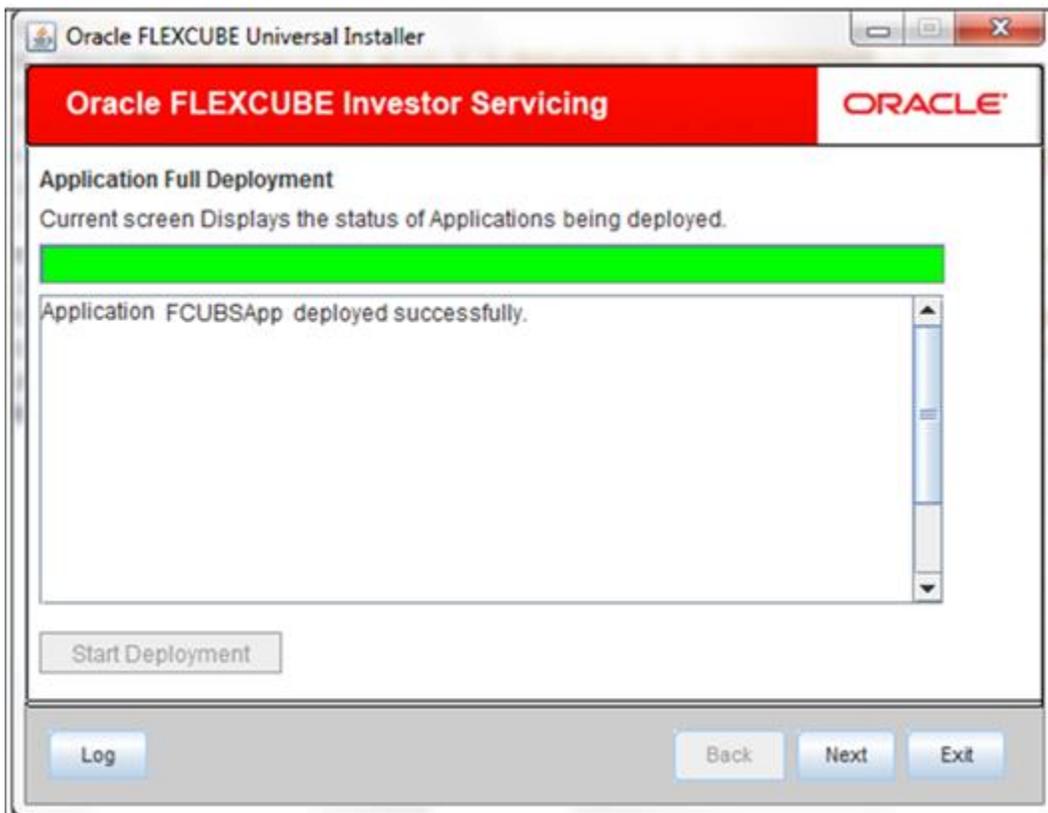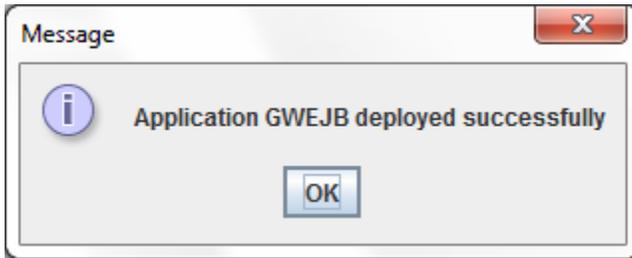


7. If the deployment is not successful, the 'Undeploy' button will be enabled.

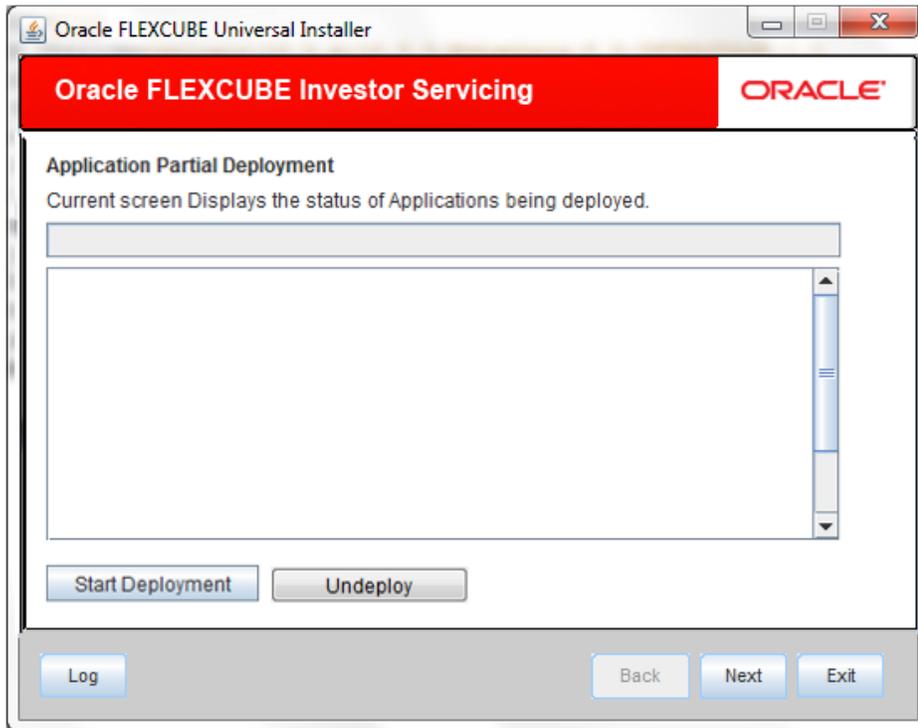


8. Click 'Undeploy' for undeploying the partially deployed EAR from the server.

### 3. Gateway HTTP Servlet FULL Deployment


1. Launch Oracle FLEXCUBE Investor Servicing Installer.
2. Click on “Next” to display the screen below.

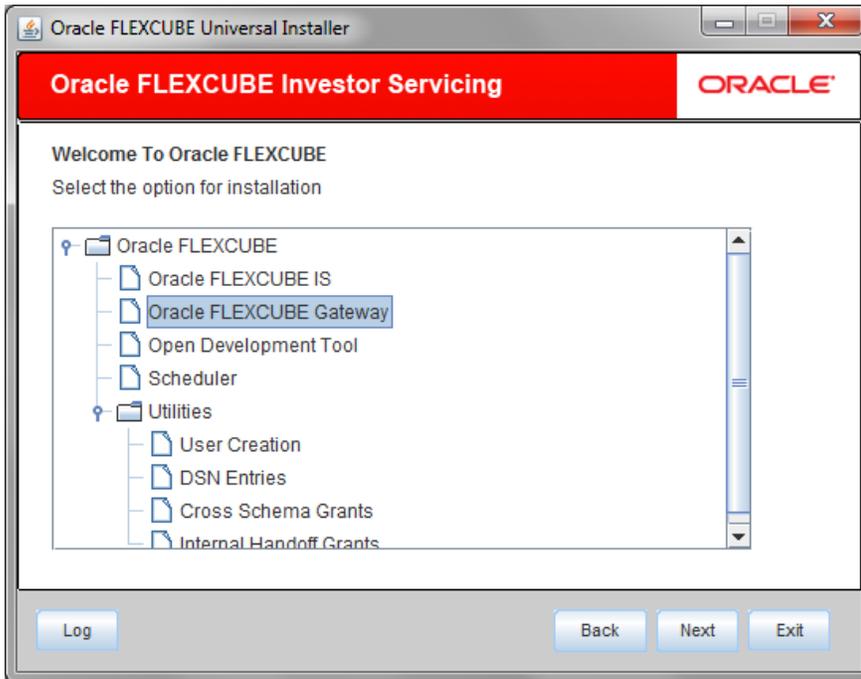


3. Select “Gateway”. Click on “Next” to display the screen below.

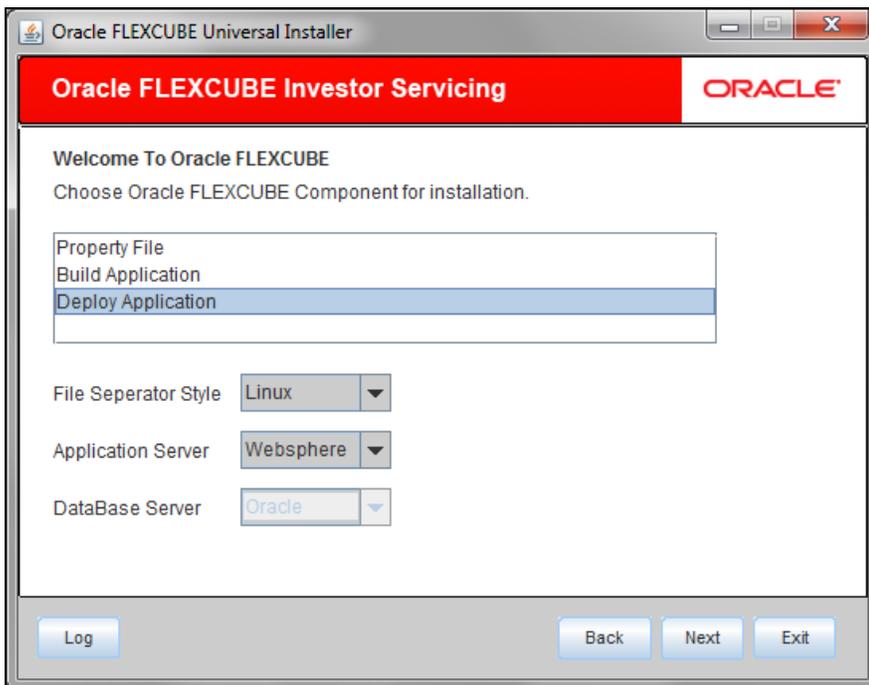

4. Select “Deploy Application”.
5. Choose the appropriate Server’s Operating System from the drop down.
6. Choose “Websphere” from the Application Server drop down.
7. Click on “Next” to display the screen below.

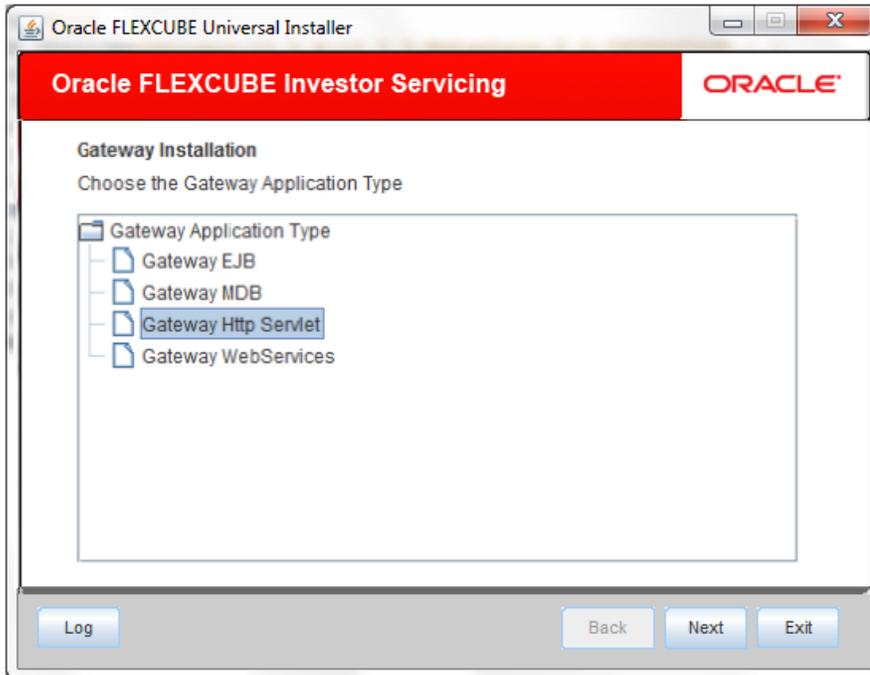

8. Select ‘GatewayHTTP Servlet’, and Click on “Next” to display the screen below.

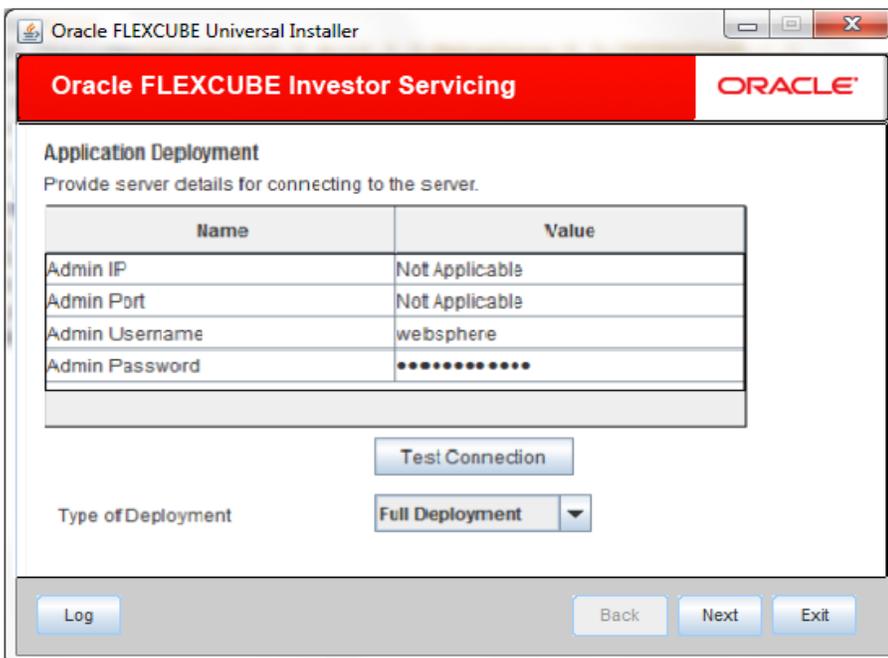

**Admin IP**

Not applicable.

**Admin Port**

Not applicable.

**Admin UserName**

Please provide the appropriate Admin Username of the websphere application server.


**Admin Password**

Please provide the appropriate Admin Password of the websphere application server.


**Type of Deployment**

Choose "Full Deployment".

- 9. Click on "**Test Connection**" to test the connection with the application server. On successful connection, the following message will be displayed.

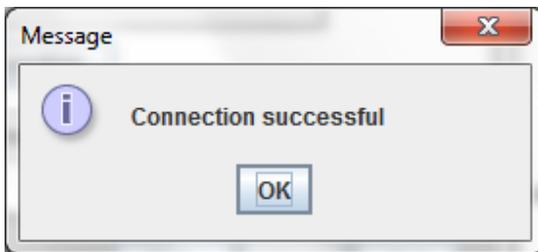

- 10. Click on "OK" and click on "Next" to display the screen below.

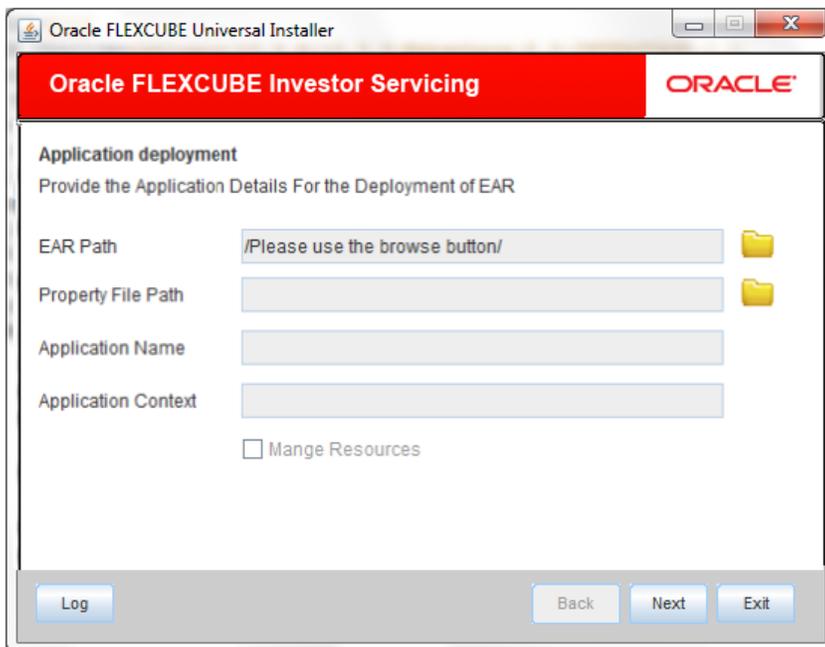

## EAR Path

Please select the application EAR to be deployed using the browse button.

Note: The Application EAR path cannot be copied and pasted on to the text box, thereby demanding the use of the browse button to select the EAR.

## Property File Path

Please select the appropriate path to the external properties file.

If the properties file is internal to the application EAR, it would be fetched on selection of the EAR and will be in a non-editable state.

## Application Name

Application Name would be fetched on selection of the EAR and will be in a non-editable state.


## Application Context

Not applicable.

## Manage Resources

Not Applicable for websphere application server.

11. Click on "Next" to display the screen below.

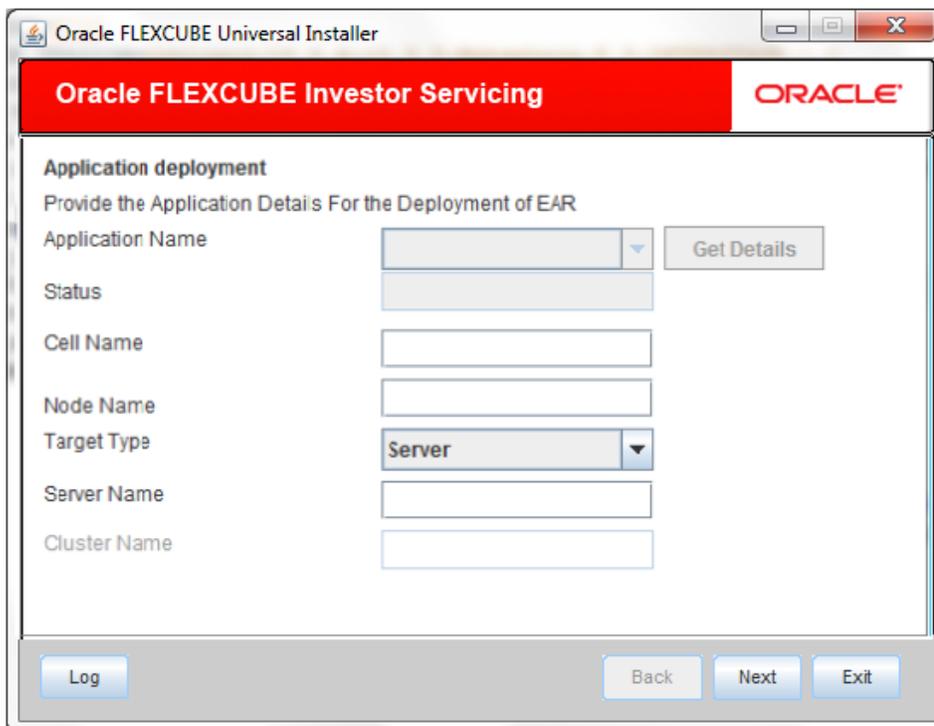

The screenshot shows a window titled "Oracle FLEXCUBE Universal Installer" with a red header bar containing "Oracle FLEXCUBE Investor Servicing" and the "ORACLE" logo. The main content area is titled "Application deployment" and contains the instruction "Provide the Application Details For the Deployment of EAR". Below this, there are several input fields and a button:

- Application Name:** A text box with a dropdown arrow and a "Get Details" button to its right.
- Status:** A text box.
- Cell Name:** A text box.
- Node Name:** A text box.
- Target Type:** A dropdown menu with "Server" selected.
- Server Name:** A text box.
- Cluster Name:** A text box.

At the bottom of the window, there are four buttons: "Log", "Back", "Next", and "Exit".

### Application Name

Not applicable for application full deployment.

### Status

Not applicable for application full deployment.

### Cell Name

Please provide the appropriate Cell Name.

### Node Name

Please provide the appropriate Node Name.

### Target Type

Please choose the appropriate target type.

### Server Name


Please provide the appropriate Server Name if the selected Target Type is “**Server**”.

### Cluster Name


Please provide the appropriate Cluster Name if the selected Target Type is “**Cluster**”.

Note: The values fed in the above screen are not validated at the screen level as a result of a limitation and hence, please provide accurate information.


12. Click on “Next” to display the screen below.

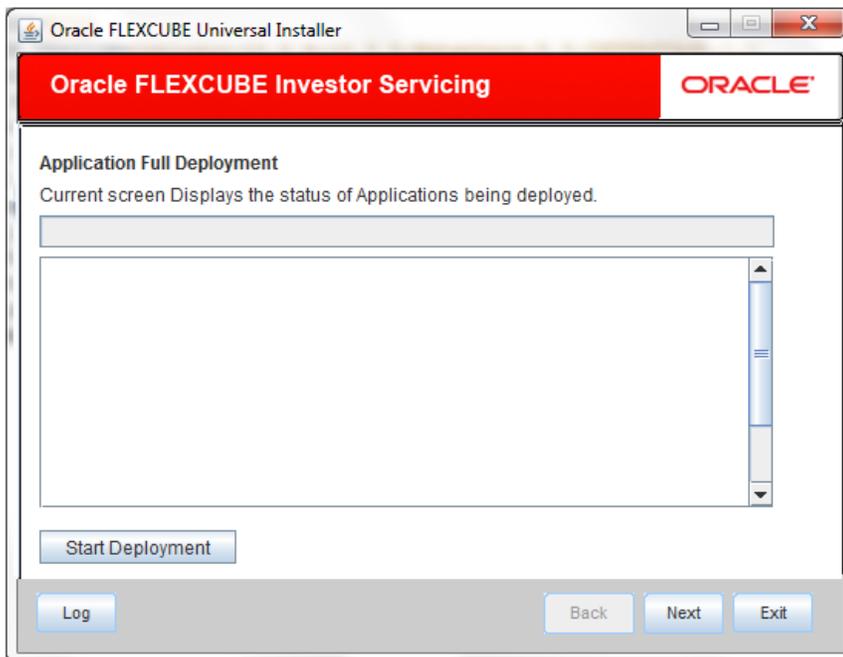

13. Click on **“Start Deployment”** to begin the process of application deployment.
14. On successful deployment, you will get the following message and the screen is expected to look like below.

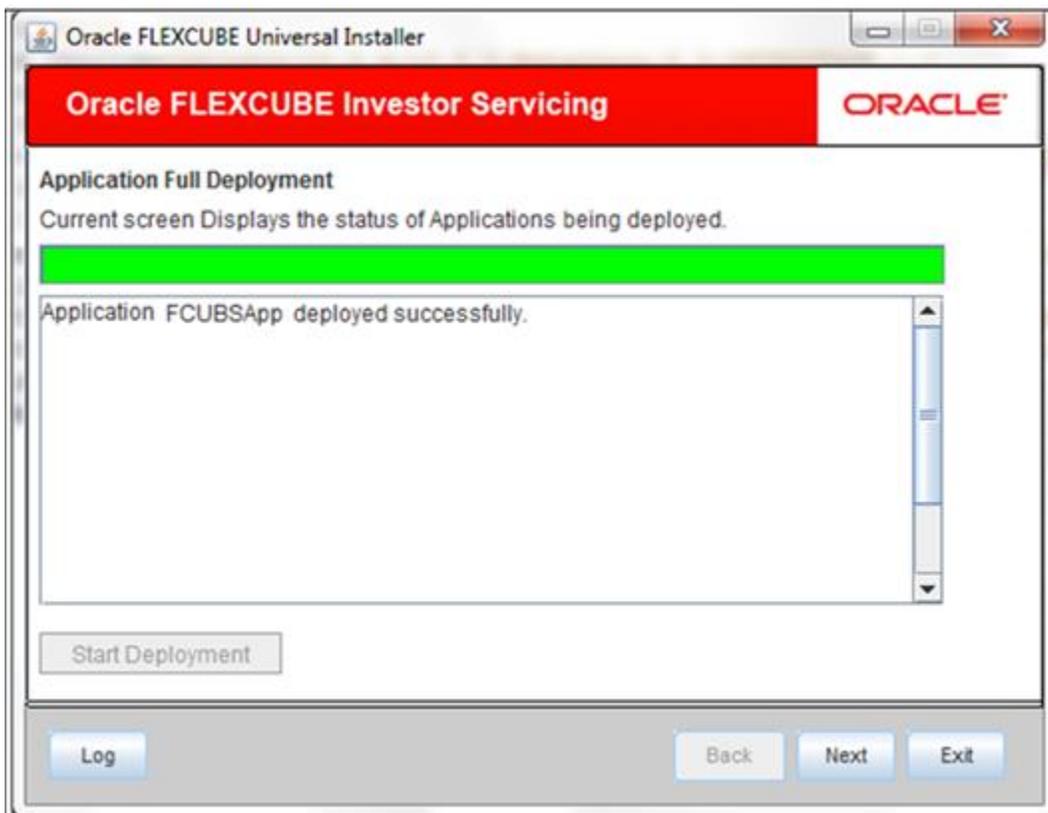


15. If the deployment is not successful, the 'Undeploy' button will be enabled.

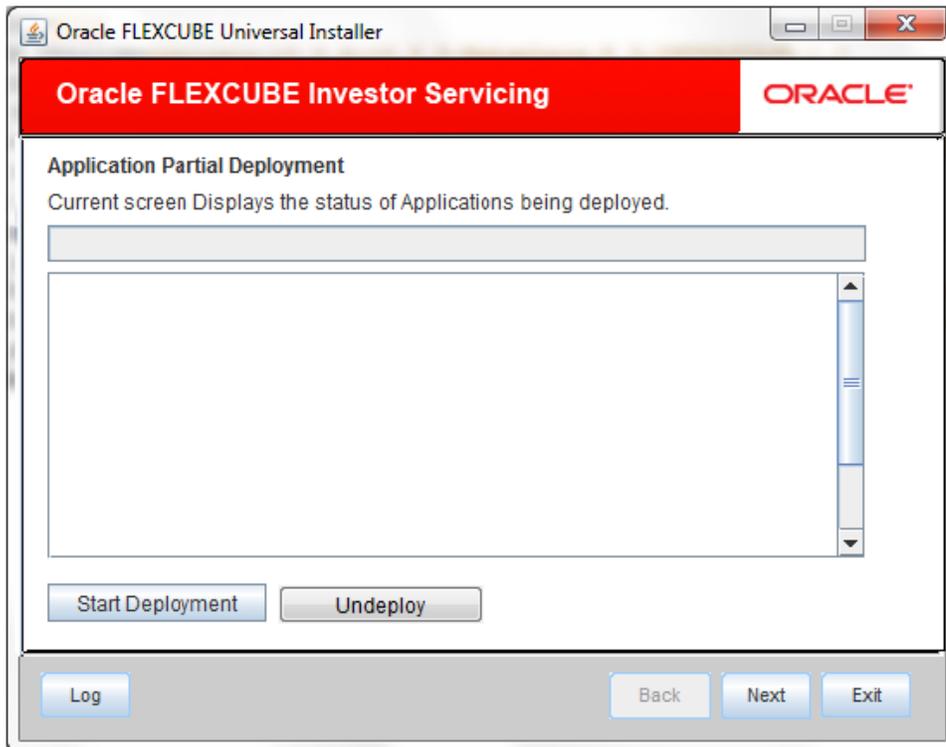

16. Click 'Undeploy' for undeploying the partially deployed EAR from the server.


## 4. FCIS Web Services Deployment

1. Launch Oracle FLEXCUBE Investor Servicing Installer.
2. Click on “Next” to display the screen below.

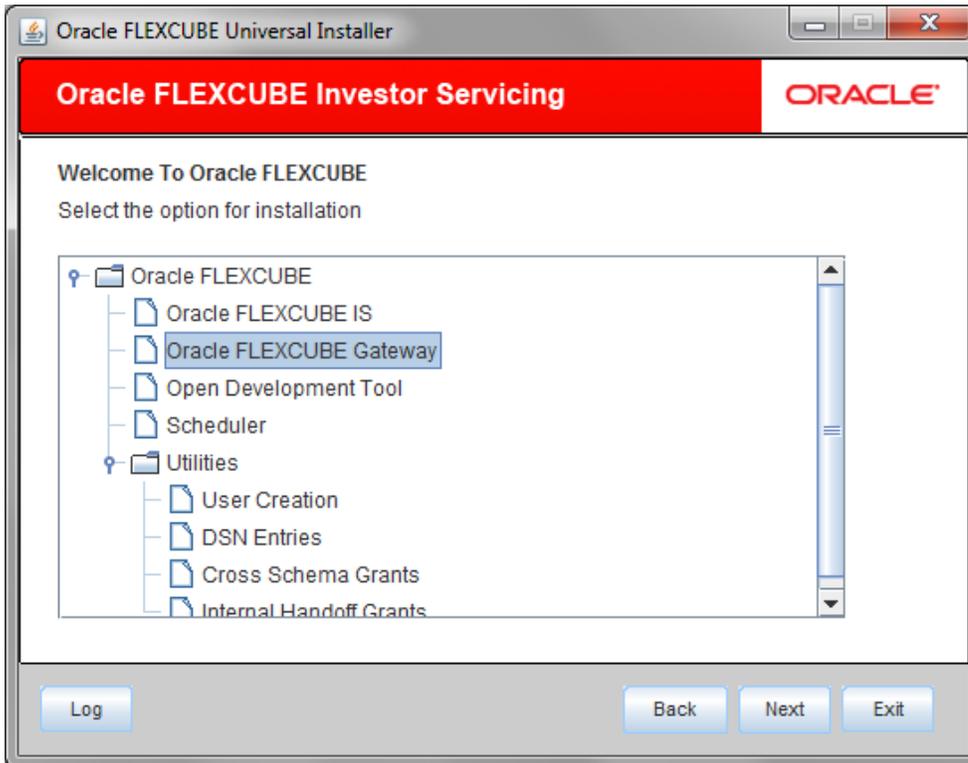


3. Select “Gateway”.
4. Click on “Next” to display the screen below.
5. Select “Deploy Application”.

6. Choose the appropriate Server's Operating System from the drop down.

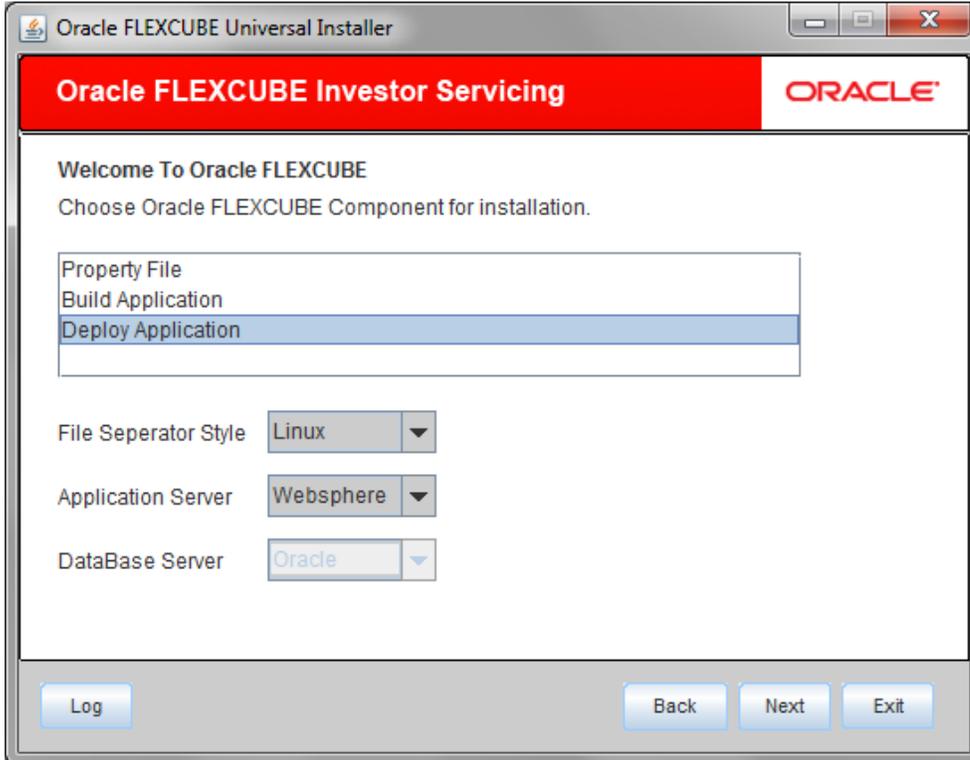

Choose "**Websphere**" from the Application Server drop down.

7. Click on "Next" to display the screen below.

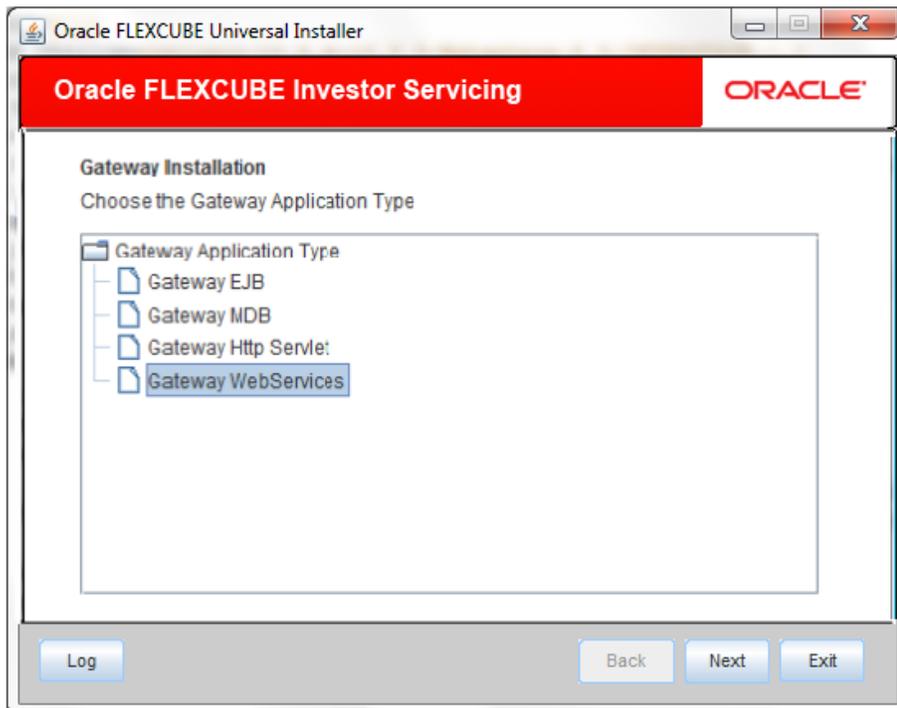

8. Select Gateway WebServices.
9. Click on “Next” to display the screen below.

The screenshot shows the Oracle FLEXCUBE Universal Installer window. The title bar reads "Oracle FLEXCUBE Universal Installer". The main window has a red header with "Oracle FLEXCUBE Investor Servicing" and the Oracle logo. Below the header, the section is titled "Application Deployment" with the instruction "Provide server details for connecting to the server." A table with two columns, "Name" and "Value", contains the following data:

Name	Value
Admin IP	Not Applicable
Admin Port	Not Applicable
Admin Username	websphere
Admin Password	••••••••••

Below the table is a "Test Connection" button. Underneath, the "Type of Deployment" is set to "Full Deployment" in a dropdown menu. At the bottom of the window, there are four buttons: "Log", "Back", "Next", and "Exit".

**Admin IP**

Not applicable.

**Admin Port**

Not applicable.

**Admin UserName**

Please provide the appropriate Admin Username of the websphere application server.

**Admin Password**

Please provide the appropriate Admin Password of the websphere application server.


**Type of Deployment**

Choose “Full Deployment”.

10. Click on “**Test Connection**” to test the connection with the application server. On successful connection, the following message will be displayed.



11. Click on “OK” and click on “Next” to display the screen below.

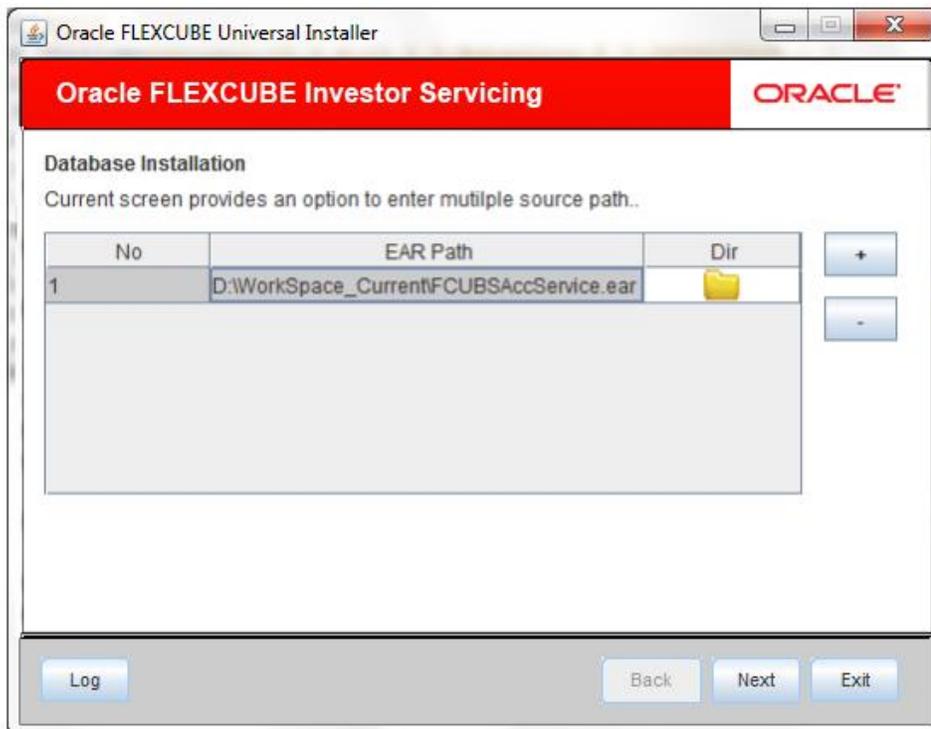

### EAR Path

Please provide the path to the application EAR that is to be deployed.

In case, multiple web services are required to be deployed, please use the “+” button to add a row and input the respective EAR path.

12. Click on “Next” to display the screen below.

Oracle FLEXCUBE Universal Installer

**Oracle FLEXCUBE Investor Servicing** ORACLE

**Application deployment**  
Provide the Application Details For the Deployment of EAR

Application Name  Get Details

Status

Cell Name

Node Name

Target Type

Server Name

Cluster Name

Log Back Next Exit

**Application Name**

Not applicable for application full deployment.

**Status**

Not applicable for application full deployment.

**Cell Name**

Please provide the appropriate Cell Name.

**Node Name**

Please provide the appropriate Node Name.

**Target Type**

Please choose the appropriate target type.

**Server Name**


Please provide the appropriate Server Name if the selected Target Type is “**Server**”.

**Cluster Name**

Please provide the appropriate Cluster Name if the selected Target Type is “**Cluster**”.



Note: The values fed in the above screen are not validated at the screen level as a result of a limitation and hence, please provide accurate information.

13. Click on “Next” to display the screen below.

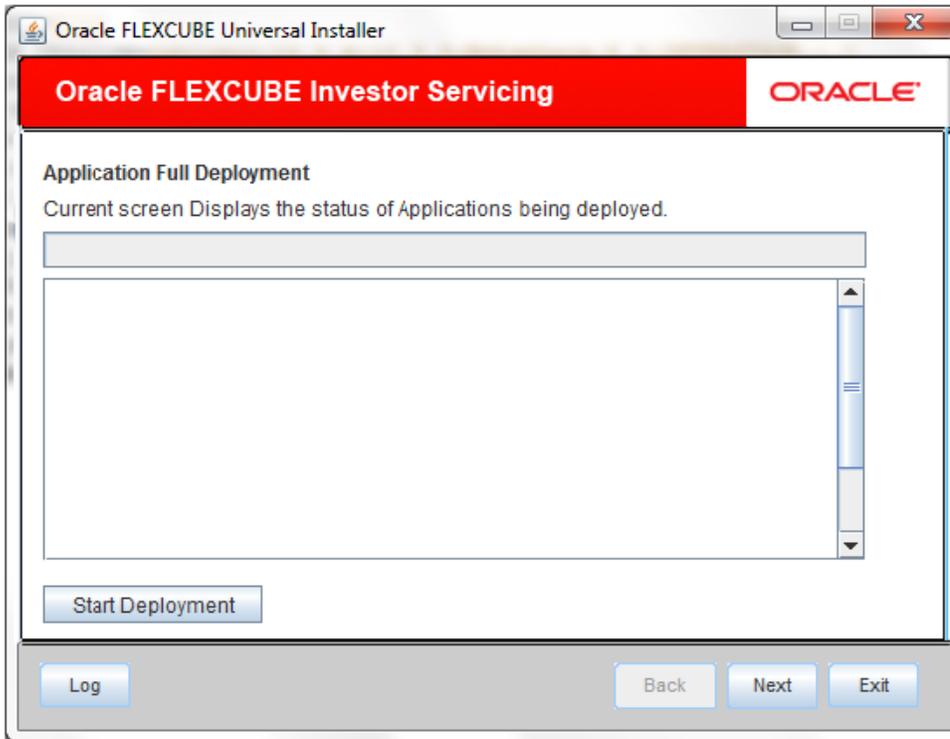


14. Click on “**Start Deployment**” to begin the process of application deployment.

15. On successful deployment, you will get the following message and the screen is expected to look like below.

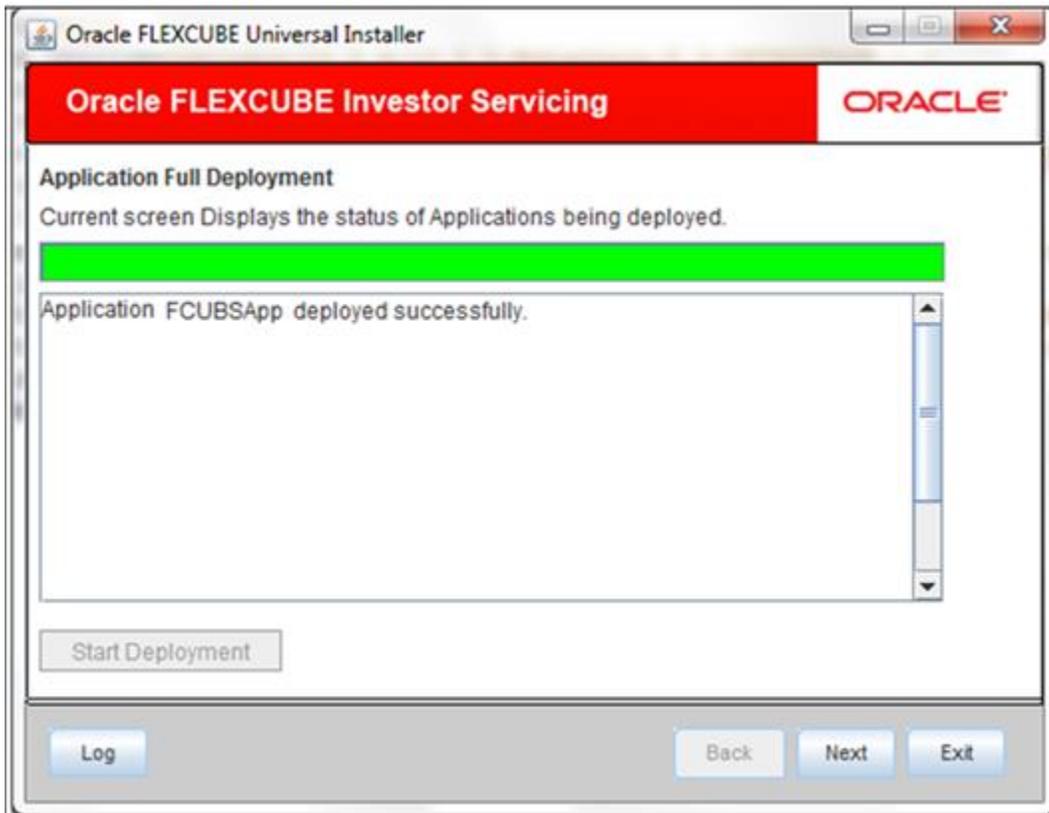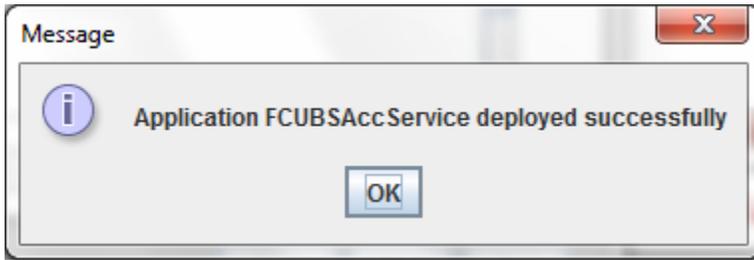

16. If the deployment is not successful, the 'Undeploy' button will be enabled.

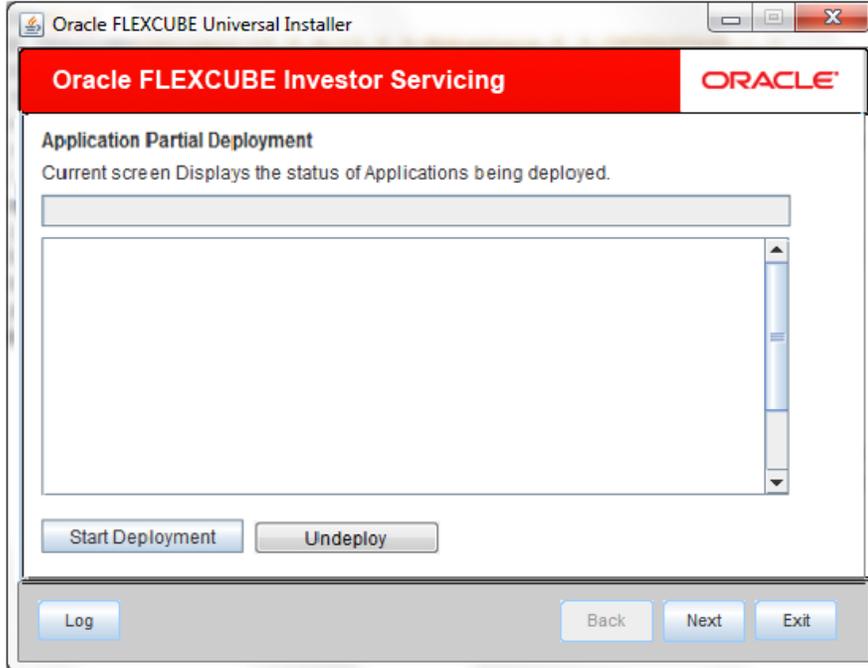

17. Click 'Undeploy' for undeploying the partially deployed EAR from the server.



Setting up Property File  
[July] [2020]  
Version 14.4.0.0.0

Oracle Financial Services Software Limited  
Oracle Park  
Off Western Express Highway  
Goregaon (East)  
Mumbai, Maharashtra 400 063  
India

Worldwide Inquiries:  
Phone: +91 22 6718 3000  
Fax: +91 22 6718 3001  
[www.oracle.com/financialservices/](http://www.oracle.com/financialservices/)

Copyright © [2007], [2020], Oracle and/or its affiliates.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

**U.S. GOVERNMENT END USERS:** Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software" or "commercial computer software documentation" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate failsafe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

This software or hardware and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services