Oracle® Application Express Administration Guide



Release 20.1 F24718-02 May 2020

ORACLE

Oracle Application Express Administration Guide, Release 20.1

F24718-02

Copyright © 2017, 2020, Oracle and/or its affiliates.

Primary Author: Terri Jennings

Contributors: Carsten Czarski, Christina Cho, Michael Hichwa, Joel Kallman, Harish Konakondla, Sharon Kennedy, Christian Neumueller, David Peake, John Snyders, Jason Straub, Vladislav Uvarov

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software" or "commercial computer software documentation" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

Preface

xi
xi
xii
xii

1 Changes in Release 20.1 for Oracle Application Express Administration Guide

2 Workspace and Application Administration

2.1	. Unde	erstan	nding Workspace Administration	2-2
	2.1.1	Wha	at is a Workspace Administrator?	2-3
	2.1.2	Acce	essing the Workspace Administration Page	2-4
	2.1.3	Wor	kspace Administration Page	2-5
	2.1.4	Res	etting Your Password	2-7
	2.1.5	Viev	ving Product Release and Environment Information	2-7
	2.1.6	Man	naging Export Files in the Current Workspace	2-8
	2.1.7	Man	naging Saved Interactive Reports	2-9
	2.1	L.7.1	About Saved Interactive Reports	2-9
	2.1	L.7.2	Viewing and Deleting Saved Interactive Reports	2-10
	2.1	L.7.3	Managing Interactive Report Subscriptions	2-10
	2.1.8	Viev	ving a Workspace Summary	2-11
	2.1	L.8.1	Viewing the Workspace Utilization Report	2-11
	2.1	L.8.2	Emailing the Workspace Utilization Report	2-11
	2.1.9	Rem	noving and Validating Websheet Database Objects	2-12
	2.1.10	Re	questing a Workspace in Workspace Administration	2-13
2.2	Mon	itoring	g Activity Within a Workspace	2-14
	2.2.1	Acce	essing the Monitor Activity Page	2-15
	2.2.2	Viev	ving Application Changes by Developer	2-15
	2.2.3	Viev	ving Application Changes by Day	2-16
	2.2.4	Viev	ving Active Sessions	2-16



2.2	2.4.1	What is an Active Session?	2-17
2.2	2.4.2	Viewing the Active Sessions Report	2-17
2.2.5	View	ving Schema Reports and Other Reports	2-17
2.3 Usin	g the	Manage Service Page	2-18
2.3.1	Acce	essing the Manage Service Page	2-18
2.3.2	Man	age Service Page	2-19
2.4 Mak	ing a S	Service Request	2-20
2.4.1	Dete	ermining the Space Available in a Workspace	2-21
2.4	4.1.1	Viewing the Detailed Tablespace Utilization Report	2-21
2.4.2	View	ing the Service Request History for the Workspace	2-22
2.4.3	Req	uesting a New Schema	2-22
2.4.4	Req	uesting More Storage	2-23
2.4.5	Req	uesting Another Workspace	2-23
2.4.6	Tern	ninating a Workspace	2-24
2.5 Con	figurin	g Workspace Preferences	2-24
2.5.1	Man	aging Workspace Account Login Controls	2-25
2.5	5.1.1	About Login Controls	2-26
2.5	5.1.2	Configuring Workspace Account Login Controls	2-26
2.5.2		trolling Access to App Builder	2-27
2.5.3	Cont	trolling Access to SQL Workshop	2-28
2.5.4	Disa	bling PL/SQL Program Unit Editing for a Workspace	2-28
2.5.5	Enal	oling RESTful Services and Defining a Path Prefix for a Workspace	2-29
2.5.6	Cont	figuring Team Development in an Existing Workspace	2-30
2.5.7	Cont	figuring Session Timeout for a Workspace	2-31
2.6 Defi	ning a	Workspace Message in Workspace Administration	2-32
2.6.1	Abou	ut Workspace Messages	2-33
2.6.2	Crea	ating and Editing a Workspace Message	2-34
2.7 Man		Users in a Workspace	2-35
2.7.1	Abou	ut Application Accounts Authentication	2-36
2.7.2		ut Application Express User Roles	2-37
2.7.3	Crea	ating User Accounts	2-37
2.7	7.3.1	Creating a New User Account	2-37
	7.3.2	Creating Multiple Users Simultaneously	2-39
2.7.4		ng Existing User Accounts	2-41
2.7.5		ring and Unlocking a User Account	2-41
2.7.6		nging a User Account Password	2-42
2.7.7		ting User Accounts	2-43
	7.7.1	Deleting a Single User Account	2-43
	7.7.2	Deleting Multiple Users at Once	2-43
2.7.8		ving the Users Dashboard	2-44
2.7.9	Usin	g Groups to Manage Application Express Users	2-44



2.7.	.9.1 About Groups	2-45
2.7.	.9.2 Creating a Group	2-45
2.7.	.9.3 Editing an Existing User Group	2-46
2.7.	.9.4 Adding and Removing Users from a Group	2-46
2.7.	.9.5 Assigning a Group to Another Group	2-46
2.7.	.9.6 Viewing Group Assignments	2-47
2.8 Acces	ssing the Data Dictionary Cache Report from Workspace Administration	2-47
2.8.1	Viewing or Refreshing the Workspace Data Dictionary Cache	2-48
2.9 Purgii	ng the Developer Activity and Click Count Log Files	2-48
2.9.1	Purging the Developer Activity Log	2-49
2.9.2	Purging the External Click Count Log	2-49
2.10 Man	aging Session State for a Workspace	2-50
2.10.1	About Session State	2-51
2.10.2	Removing Session State After Reviewing Session Details	2-51
2.10.3	Viewing Session State for the Current Session	2-52
2.10.4	Purging Sessions by Age	2-52
2.10.5	Purging Session State for the Current Session	2-53
2.11 Man	aging User Preferences	2-53
2.11.1	Setting User Preferences	2-54
2.12	1.1.1 Setting User Preferences by Creating a Page Process	2-54
2.12	1.1.2 Setting the Source of an Item Based on a User Preference	2-55
2.12	1.1.3 Setting User Preferences Programmatically	2-56
2.11.2	Viewing Preferences by User	2-56
2.11.3	Viewing Current User Preferences	2-56
2.11.4	Purging Preferences for a Specific User	2-57
2.11.5	Purging Preferences for the Current User	2-57
2.11.6	Removing User Preferences Programmatically	2-58
2.11.7	Resetting User Preferences Using a Page Process	2-58
2.12 Man	aging Page and Region Caching	2-59
2.12.1	Purging Cached Regions and Pages	2-59
2.13 Cha	nging Build Status for Multiple Applications	2-60
2.13.1	About Changing Application Build Status	2-60
2.13.2	Managing Build Status in Workspace Administration	2-61
2.14 View	ving Workspace Dashboards	2-61
2.14.1	Accessing the Workspace Dashboards	2-62
2.14.2	Workspace Dashboard	2-63
2.14.3	Users Dashboard	2-63
2.14.4	Activity Dashboard	2-64
2.14.5	Developer Activity Dashboard	2-64
2.14.6	Performance Dashboard	2-64
2.14.7	Websheets Dashboard	2-64



2.14.8	Applications Dashboard	2-65		
2.14.9	2.14.9 Database Dashboard			
2.15 Leve	raging App Builder Defaults	2-65		
2.15.1	About App Builder Defaults	2-65		
2.15.2	Configuring App Builder Defaults	2-66		

3 Oracle Application Express Administration Services

3.1	What	ls an	Instance Administrator?	3-2
3.2	Signi	ng In	To Administration Services	3-3
3.3	Over	view:	Administration Services UI	3-5
	3.3.1	Adm	inistration Services Home Page	3-5
	3.3.2	Man	age Instance Page	3-8
	3.3.3	Man	age Workspaces Page	3-10
3.4	Mana	aging	Requests	3-11
	3.4.1	Abou	ut Workspace Requests and Change Requests	3-12
	3.4.2	View	ing Requests on the Instance Administration Home Page	3-12
	3.4.3	View	ving Pending Requests	3-13
	3.4.4	Man	aging Workspace Requests	3-14
	3.4	.4.1	About the Workspace Request Approval Process	3-14
	3.4	.4.2	Approving or Declining a Pending Workspace Request	3-15
	3.4	.4.3	Changing the Status of an Existing Workspace Request	3-16
	3.4	.4.4	Deleting a Workspace Request	3-17
	3.4.5	Man	aging Change Requests	3-17
	3.4	.5.1	Approving or Declining a Pending Change Request	3-18
3.5	Mana	aging	Instance Settings	3-18
	3.5.1	Man	aging Feature Configuration	3-19
	3.5	.1.1	Configuring Application Development Settings	3-19
	3.5	.1.2	Configuring Application Installation Options	3-22
	3.5	.1.3	Configuring SQL Workshop	3-22
	3.5	.1.4	Configuring Monitoring	3-24
	3.5	.1.5	Enabling RESTful Services for an Instance	3-26
	3.5	.1.6	Enabling Service Requests	3-27
	3.5	.1.7	Configuring Team Development for New Workspaces	3-28
	3.5.2	Conf	figuring Security	3-28
	3.5	.2.1	Configuring Service-level Security Settings	3-29
	3.5	.2.2	Configuring HTTP Protocol Attributes	3-37
	3.5	.2.3	Enabling Real Application Security	3-40
	3.5	.2.4	Configuring Session Timeout for an Instance	3-41
	3.5	.2.5	Isolating All Workspaces in an Instance	3-42
	3.5	.2.6	Defining Excluded Domains for Regions and Web Services	3-44



3.	5.2.7	Configuring Authentication Controls for an Instance	3-45
3.	5.2.8	Creating Strong Password Policies	3-48
3.	5.2.9	Restricting Access to Oracle Application Express by Database Access Descriptor (DAD)	3-50
3.	5.2.10	Managing Authorized URLs	3-53
3.5.3	Con	figuring Instance Settings	3-54
3.	5.3.1	About Configuring Workspace Provisioning	3-55
3.	5.3.2	Disabling Email Provisioning	3-56
3.	5.3.3	Configuring Storage	3-56
3.	5.3.4	Configuring Email	3-60
3.	5.3.5	Configuring Wallet Information	3-65
3.	5.3.6	Configuring Report Printing	3-68
3.	5.3.7	Configuring the Help Menu	3-72
3.	5.3.8	Configuring Workspace Size Requests	3-72
3.	5.3.9	Managing Application ID Range	3-73
3.5.4	Purç	ging Inactive Workspaces	3-73
3.	5.4.1	Configuring Workspace Purge Settings	3-74
3.5.5	Usir	ng the REST Administration Interface to View Usage Statistics	3-75
3.	5.5.1	About the REST Administration Interface	3-76
3.	5.5.2	Enabling the REST Administration Interface	3-76
3.	5.5.3	Registering REST Client Applications	3-76
3.	5.5.4	Viewing REST Client Details	3-77
3.	5.5.5	Removing a REST Client	3-78
3.	5.5.6	Disabling the REST Administration Interface	3-79
3.6 Usir	ng the	Productivity and Sample Applications Repository	3-79
3.6.1	Acce	essing the Productivity and Sample Applications Repository	3-80
3.6.2	Man	aging Custom Applications	3-80
3.	6.2.1	About Making Custom Apps Available to Users	3-80
3.	6.2.2	Uploading a Custom App to the Repository	3-81
3.	6.2.3	Editing Custom Application Details	3-82
3.	6.2.4	Deleting a Custom Application	3-83
3.7 Mar	naging	Public Themes	3-83
3.7.1	Add	ing a Public Theme to the Theme Repository	3-84
3.7.2	Dele	eting a Public Theme	3-84
3.7.3	Mod	lifying a Public Theme	3-85
3.7.4	Abo	ut Exporting a Public Theme	3-85
3.8 Mar	naging	Meta Data	3-85
3.8.1	Man	aging Session State for an Instance	3-86
3.	8.1.1	About Session State	3-86
3.	8.1.2	Viewing Session Details Before Purging	3-87
3.	8.1.3	Purging Sessions by Age	3-87



3.8.	1.4	Viewing Session Statistics Before Purging	3-87
3.8.2	Manag	ging the Mail Queue	3-88
3.8.	.2.1	Sending and Deleting Messages in the Mail Queue	3-88
3.8.3	Viewir	ng Installed Translations	3-89
3.8.4	Deleti	ng Interactive Report Subscriptions	3-89
3.9 Instal	ling Ex	ported Applications in a Runtime Environment	3-90
3.9.1	About	the Advantages of Using Runtime Environment	3-90
3.9.2	Install	ing an Exported Application in to a Runtime Environment	3-91
3.10 Com	nmunic	ating with Users Using Messages and Task Lists	3-91
3.10.1	Defir	ning a Login Message	3-92
3.10	0.1.1	About Login Messages	3-92
3.10	0.1.2	Creating a Login Message	3-92
3.10	0.1.3	Editing or Removing a Login Message	3-93
3.10.2	Defir	ning a System Message	3-93
3.10	0.2.1	About System Messages	3-93
3.10	0.2.2	Creating and Editing a System Message	3-94
3.10.3	Defir	ning a Workspace Message in Administration Services	3-94
3.10.4	Mana	aging a Site-Specific Tasks List	3-95
3.10	0.4.1	Adding a New Task	3-95
3.10	0.4.2	Editing an Existing Task	3-96
3.10	0.4.3	Deleting a Task	3-96
3.11 Man	aging	Logs and Files	3-96
3.11.1	Dele	ting SQL Workshop Logs	3-97
3.11.2	Dele	ting Page View Activity Log Entries	3-98
3.12	1.2.1	About Page View Activity Logs	3-98
3.12	1.2.2	Truncating Page View Activity Logs Manually	3-98
3.11.3	Dele	ting Developer Activity Log Entries	3-99
3.11.4	Mana	aging Developer Log Retention	3-99
3.11.5	Dele	ting Click Counting Log Entries	3-100
3.11.6	Dele	ting Web Service Log Entries	3-100
3.11.7	Dele	ting the Login Access Log	3-100
3.11.8	Mana	aging Log Intervals	3-101
3.11.9	Arch	iving the Activity Log	3-101
3.12 Crea	ating a	Service Signup Wizard	3-102
3.12.1	Defir	ning a Service Signup Wizard	3-102
3.12.2	Runr	ning a New Service Signup Wizard	3-103
3.13 Man	aging	Schemas	3-103
3.13.1	Wha	t Is the Oracle Application Express Engine Schema?	3-104
3.13.2	Dete	rmining the Oracle Application Express Engine Schema	3-104
3.13.3	Unde	erstanding Oracle Default Schema Restrictions	3-105
3.13	3.3.1	About Assigning Oracle Default Schemas to Workspaces	3-105



	3.13	3.3.2	Granting the Privilege to Assign Oracle Default Schemas	3-106
	3.13	3.3.3	Revoking the Privilege to Assign Oracle Default Schemas	3-106
	3.13	8.3.4	Working with Restricted Schemas	3-107
	3.13	8.3.5	Determining the Privilege Status	3-108
3.14	4 Crea	ting V	Vorkspaces in Administration Services	3-108
	3.14.1	Abo	ut Workspaces	3-109
	3.14.2	Abo	ut Specifying How Workspaces Are Created	3-110
	3.14.3	Sele	cting a Workspace Provisioning Mode	3-111
	3.14.4	How	Oracle-Managed Files Effects Workspace Provisioning	3-112
	3.14.5	Crea	ating a Workspace Manually	3-112
	3.14	1.5.1	Creating Workspace Manually in a Full Development Environment	3-112
	3.14	1.5.2	Creating a Workspace Manually in a Runtime Environment	3-113
	3.14.6	Crea	ating Multiple Workspaces	3-114
3.1	5 Mana	aging	Existing Workspaces	3-115
	3.15.1	View	ving Existing Workspace Information	3-117
	3.15.2	View	ving the Application Attributes Report	3-117
	3.15.3	Dele	eting a Workspace	3-118
	3.15	5.3.1	Identifying and Deleting Inactive Workspaces	3-118
	3.15	5.3.2	Deleting Workspaces in a Full Development Environment	3-121
	3.15	5.3.3	Deleting Workspaces in a Runtime Development Environment	3-121
	3.15.4	Lock	king a Workspace	3-122
	3.15.5	Man	aging Workspace to Schema Assignments	3-122
	3.15	5.5.1	Viewing Schema and Workspace Assignments in a Development Environment	3-123
	3.15	5.5.2	Viewing Schema and Workspace Assignments in a Runtime Environment	3-123
	3.15	5.5.3	Editing Existing Schema and Workspace Assignments	3-124
	3.15	5.5.4	Associating Schemas in a Full Development Environment	3-124
	3.15	5.5.5	Associating Additional Schemas in a Runtime Environment	3-125
	3.15	5.5.6	Removing a Schema Mapping from a Workspace in a Runtime Environment	3-126
	3.15.6	Man	aging Component Availability for an Instance	3-126
	3.15.7	Perf	orming a Workspace Search	3-127
	3.15.8	Isola	ating a Workspace to Prevent Browser Attacks	3-127
	3.15	5.8.1	About Isolating a Workspace to Prevent Browser Attacks	3-128
	3.15	5.8.2	Configuring Workspace Isolation Attributes	3-128
	3.15.9	View	ving the Workspace Details Report	3-130
	3.15.10	Vie	wing Workspace Database Privileges	3-131
	3.15.11	Vie	wing File Size and File Count by Workspace	3-132
	3.15.12	Fin	ding and Emailing Workspace Summary	3-132

	3.15.13	Acce	essing the Data Dictionary Cache Report from Administration	
		Serv	rices	3-133
	3.15	.13.1	Viewing or Refreshing the Data Dictionary Cache	3-133
	3.15.14	Expo	orting and Importing a Workspace	3-134
	3.15	.14.1	About Exporting and Importing a Workspace	3-134
	3.15	.14.2	Exporting a Workspace in Administration Services	3-135
	3.15	.14.3	Importing a Workspace in Administration Services	3-135
	3.15.15	Expo	orting Workspaces, Apps, and Related Files from a Command-	
		line		3-136
	3.15	.15.1	About APEXExport	3-136
	3.15	.15.2	Using APEXExport	3-137
	3.15.16	Cha	nging Application Build Status in Administration Services	3-139
	3.15	.16.1	About Changing Application Build Status	3-140
	3.15	.16.2	Changing Build Status in Administration Services	3-140
	3.15.17	View	ing the Parsing Schemas Report	3-141
3.1	6 Mana	aging L	Jsers Across an Application Express Instance	3-141
	3.16.1	About	the Advantages of Managing Users at the Instance Level	3-142
	3.16.2	About	Application Accounts Authentication	3-142
	3.16.3	About	Application Express User Roles	3-142
	3.16.4	Creat	ing New User Accounts in Administration Services	3-143
	3.16.5	Editin	g an Existing User Account in Administration Services	3-144
	3.16.6	Deleti	ng User Accounts in Administration Services	3-145
3.1	7 Moni	toring /	Activity Across a Development Instance	3-145
	3.17.1	Monit	oring Activity	3-146
	3.17.2	Viewi	ng the Signup Survey Report	3-147
	3.17.3	Viewi	ng the Backup Log	3-147

A DBMS_SCHEDULER Jobs

A.1 List of DBMS_SCHEDULER Jobs A	4-1
-----------------------------------	-----

Index



Preface

Oracle Application Express is a hosted declarative development environment for developing and deploying database-centric web applications. Oracle Application Express turns a single Oracle database into a shared service by enabling multiple workgroups to build and access applications as if they were running in separate databases.

Oracle Application Express Administration Guide describes how to perform administration tasks for an Oracle Application Express workspace, application, or an entire development instance.

- Audience
- Documentation Accessibility
- Related Documents
- Conventions

Audience

Oracle Application Express Administration Guide describes how to perform administration tasks for an Oracle Application Express workspace, application, or an entire development instance.

To use this guide, you must have a general understanding of relational database concepts and an understanding of the operating system environment under which you are running Oracle Application Express.

See Also:

Oracle Application Express Installation Guide

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at http://www.oracle.com/pls/topic/lookup? ctx=acc&id=docacc.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit http://www.oracle.com/pls/topic/



lookup?ctx=acc&id=info or visit http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs if you are hearing impaired.

Related Documents

For more information, see these Oracle resources:

- Oracle Application Express Release Notes
- Oracle Application Express Installation Guide
- Oracle Application Express End User's Guide
- Oracle Application Express App Builder User's Guide
- Oracle Application Express SQL Workshop Guide
- Oracle Application Express API Reference
- Oracle Application Express Application Migration Guide
- Oracle Database Concepts

Conventions

The following text conventions are used in this document:

Convention	Meaning
boldface	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
italic	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
monospace	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.



1 Changes in Release 20.1 for Oracle Application Express Administration Guide

All content in *Oracle Application Express Administration Guide* has been updated to reflect release 20.1 functionality.

New Features and Updates

The following features are new in Oracle Application Express release 20.1:

Workspace Session Timeout Attributes

Configure Session Timeout attributes at the workspace-level to reduce exposure at the application-level for abandoned computers with an open web browser.

See "Configuring Session Timeout for a Workspace" and "Configuring Session Timeout for an Instance."

Data Dictionary Cache Report

The Data Dictionary Cache report captures statistics and data analysis of all workspace schema tables and caches into the Oracle Application Express Data Dictionary. Manually refresh the Data Dictionary Cache manually from the Workspace Cache report.

See "Viewing or Refreshing the Data Dictionary Cache."

Service Request History

View the Service Request History report prior to requesting additional storage to determine whether prior storage requests have been declined due to some underlying error.

See "Viewing the Service Request History for the Workspace."

Deprecated and Desupported Features

Legacy Team Development has been desupported in this release. All references to Legacy Team Development have been removed.

See "Deprecated Features" and "Desupported Features" in *Oracle Application Express Release Notes.*



2 Workspace and Application Administration

In an Oracle Application Express development environment, users sign in to a shared work area called a workspace. Workspace administrators monitor and administer a shared work area called a workspace.

- Understanding Workspace Administration Use Workspace Administration to monitor and administer a workspace.
- Monitoring Activity Within a Workspace Monitor developer activity and changes within a workspace by accessing the Monitor Activity page.
- Using the Manage Service Page

Use the Manage Service page to manage service requests, configure workspace preferences, edit workspace announcements, and view reports. Additionally, administrators use this page to clear log files, manage session state, clear cached content, manage Websheet database objects, and manage interactive report settings.

- Making a Service Request Workspace administrators use the Request Service page to request a schema, add storage space, terminate a workspace, or request another workspace.
- Configuring Workspace Preferences
 Configure workspace preferences for workspace login controls, access to App Builder and SQL Workshop, support for PL/SQL editing and RESTful services, and access to Team Development.
- Defining a Workspace Message in Workspace Administration Workspace administrators can quickly communicate with other users by creating workspace messages.
- Managing Users in a Workspace Create new user accounts, manage existing user accounts, and change user passwords.
- Accessing the Data Dictionary Cache Report from Workspace Administration Access the Data Dictionary Cache report from Workspace Administration to view statistics and data analysis of schema tables and caches in a workspace.
- Purging the Developer Activity and Click Count Log Files Manually purge developer logs and the External Count Clicks log on the Log files page. Log entries older than one month are automatically deleted.
 - Managing Session State for a Workspace
 A session establishes persistence (or stateful behavior) across page views.
 Workspace administrators can view session details for the current session or for recent sessions, purge the current session state, or purge sessions based on their age.
- Managing User Preferences
 Developers can use preferences to store values for a specific Application Express user across distinct sessions. Once set, these preferences can be removed



programmatically or manually. Administrators can set user preferences by creating a page process, by the calculation of a preference Item Source Value, or programmatically by using a PL/SQL API.

- Managing Page and Region Caching Improve an application's performance by taking advantage of page and region caching.
- Changing Build Status for Multiple Applications
 Configure the Build Status attribute at the workspace-level to prevent an application from being modified by other developers.
- Viewing Workspace Dashboards
 Use the Dashboard page to view details about the current workspace and monitor
 overall workspace activity.
- Leveraging App Builder Defaults App Builder Defaults enable developers to reduce the number of steps needed to create a new application.

🖍 See Also:

- "Oracle Application Express Administration Services"
- "Understanding Developer Security Best Practices" in Oracle Application Express App Builder User's Guide

2.1 Understanding Workspace Administration

Use Workspace Administration to monitor and administer a workspace.

- What is a Workspace Administrator?
 Workspace administrators have all the rights and privileges available to developer and manage administrator tasks specific to a workspace.
- Accessing the Workspace Administration Page Use the Workspace Administration page to monitor and administer a workspace.
- Workspace Administration Page
 Use the Workspace Administration page to manage service requests, manage
 users and groups, monitor activity, view dashboards, view the Utilization Report,
 change your password, manage interactive report settings, manage the Export
 Repository and Websheet Database objects, and request a new workspace.
- Resetting Your Password
 Reset your password by clicking Change My Password under Tasks on the
 Workspace Administration page.
- Viewing Product Release and Environment Information Access the About Application Express page to view basic product information, including the Application Express release number, workspace name, environment details, and database information.
- Managing Export Files in the Current Workspace
 Use the Manage Export Repository to manage Export files in the current workspace.



- Managing Saved Interactive Reports
 View and delete saved interactive reports as well as manage interactive report subscriptions.
 - Viewing a Workspace Summary Use the Workspace Utilization report to view a comprehensive summary of the current workspace, including summaries of schemas, database applications, Websheet applications, SQL Workshop scripts and results, Team Development details, application activity, developer activity, and counts of database objects.
- Removing and Validating Websheet Database Objects Remove or validate the data objects associated with Websheets.
- Requesting a Workspace in Workspace Administration Request a workspace on the Workspace Administration page.

2.1.1 What is a Workspace Administrator?

Workspace administrators have all the rights and privileges available to developer and manage administrator tasks specific to a workspace.

In Oracle Application Express, users sign in to a shared work area called a workspace. A workspace enables multiple users to work within the same Oracle Application Express installation while keeping their objects, data and applications private. This flexible architecture enables a single database instance to manage thousands of applications.

Within a workspace, **End users** can only run existing database or Websheet application. **Developers** can create and edit applications, monitor workspace activity, and view dashboards. Oracle Application Express includes two administrator roles:

- Workspace administrators are users who perform administrator tasks specific to a workspace.
- **Instance administrators** are superusers that manage an entire hosted Oracle Application Express instance which may contain multiple workspaces.

Workspace administrators can reset passwords, view product and environment information, manage the Export Repository, manage saved interactive reports, view the workspace summary report, and manage Websheet database objects. Additionally, workspace administrators manage service requests, configure workspace preferences, manage user accounts, monitor workspace activity, and view log files.

See Also:

"About Application Express User Roles" and "What Is an Instance Administrator?"



2.1.2 Accessing the Workspace Administration Page

Use the Workspace Administration page to monitor and administer a workspace.

Tip:

You can access many workspace administration functions from both the Administration menu and Workspace Administration home page. The Administration menu includes the options **Manage Service**, **Manage Users and Groups**, **Monitor Activity**, **Dashboards**, and **Change My Password**. For consistency, the procedures in this document navigates the user to the Workspace Administration home page.

To access the Workspace Administration page:

1. Sign in to Oracle Application Express.

The Workspace home page appears.

- 2. At the top of the page, click the **Administration** menu.
- 3. From the Administration menu, select Administration.

	App Builder \vee SQL Workshop	✓ Team Der	velopment 🗸	App Gallery 🗸 🗸	Q &	⑦ AD
App Builder	SQL Workshop	Team Developm		Administration Manage Servic Manage Users Monitor Activi Dashboards	and Groups	he native elopment le Oracle
Top Apps	Top Users		Messages	Change My Pa	ssword	
	AD admin	24		orkspace message	10	83
			Workspace Message		Applications	Tables
			Sample Sy System M	istem Message lessage	1	2
					Productivity Apps	Issues

The Administration page appears.





2.1.3 Workspace Administration Page

Use the Workspace Administration page to manage service requests, manage users and groups, monitor activity, view dashboards, view the Utilization Report, change your password, manage interactive report settings, manage the Export Repository and Websheet Database objects, and request a new workspace.

System Message Region

The System Message region displays at the top of the page. Administrators can use this region to communicate with other users within an instance. See "Defining a System Message."

O APEX App	op Builder 🗸 🗸	SQL Workshop 🗸 Team	n Develor	pment \vee App Gallery	/ ~	Q & 0	AD	
Sample System Message	About Workspace Administration enables you to manage your account. Depending on your							
						privileges, you can monitor and administer this workspace. Learn More		
Manage Service	Manage User Groups	· · · · · ·	Das	shboards Utilizatio	on Report	Tasks Change My Password	>	
						About Application Express	$s \rightarrow$	
Workspace Message						Manage User Groups		
Sample Workspace mes				0	Manage User Groups	\rightarrow		
					1	Manage User Groups Create User	>	
		licare		Activity	1		>	
Service		Users		Activity	1	Create User	> > >	
		Users Users	4	Activity Reporting Timeframe	3 hours	Create User Create Multiple Users Delete Multiple Users Manage Interactive	> > > > > > > >	
Service	ssage		4	· · ·	3 hours 77	Create User Create Multiple Users Delete Multiple Users	> > > > > > > >	
Service Workspace Name	EXAMPLE	Users		Reporting Timeframe		Create User Create Multiple Users Delete Multiple Users Manage Interactive Report Settings Manage Export	> > > > > > > > > > > > > > > > > > > >	
Service Workspace Name Database Applications	EXAMPLE	Users Workspace Administrators	2	Reporting Timeframe Page Events	77	Create User Create Multiple Users Delete Multiple Users Manage Interactive Report Settings Manage Export Repository	> > > > > > > > > > > > > > > > > > > >	
Service Workspace Name Database Applications Websheet Applications	EXAMPLE 10 1	Users Workspace Administrators Application Developers	2	Reporting Timeframe Page Events Median Page Time	77 0.13	Create User Create Multiple Users Delete Multiple Users Manage Interactive Report Settings Manage Export	> > > > > > > > > > > > > > > > > > > >	

Workspace Administration Icons

The top of Workspace Administration page also contains the following icons:

- Manage Service. Manage service requests (including, schema requests, storage requests, and service termination) and configure workspace preferences, edit announcements, view utilization reports and log files, and manage session state. See "Manage Service Page."
- Manage Users and Groups. Manage Application Express user accounts and user groups. See "Managing Users in a Workspace."

ORACLE

- Monitor Activity. Monitor page views, developer activity, active sessions, view page view analysis reports, environment reports such as browser usage and click counts, and user login reports. See "Monitoring Activity Within a Workspace."
- **Dashboards**. View details about the current workspace and monitor users, activity, developer activity, performance, Websheet application development, database application development, and view database details. See "Viewing Workspace Dashboards."
- Utilization Report. View a comprehensive summary of the current workspace, including schemas, database applications, Websheet applications, SQL Workshop scripts and results, Team Development details, application activity, developer activity, and counts of database objects. See "Viewing a Workspace Summary"

Workspace Message

The Workspace Message region displays directly below the icons at the top of the Workspace Administration page. Use this region to communicate information to other users. See "Defining a Workspace Message in Workspace Administration."

Tasks Region

A Tasks region displays on the right side of the Workspace Administration page and contains the following links:

- Change My Password. Links to the Change Password section of the Edit Profile page. See "Resetting Your Password."
- About Application Express. Links to an About page that lists basic product information. See "Viewing Product Release and Environment Information."
- Manage User Groups. Links to the User groups page. Workspace administrators can use groups for categorization and to manage privileges. See "Using Groups to Manage Application Express Users."
- Create User. Links to a form where Workspace administrators can create new user. See "Creating User Accounts."
- Create Multiple Users. Enables Workspace administrators to create multiple users once. See "Creating Multiple Users Simultaneously."
- Delete Multiple Users. Enables Workspace administrators to delete multiple users at once. See "Deleting Multiple Users at Once."
- Manage Interactive Report Settings. Enables Workspace administrators to manage saved reports and subscriptions. See "Managing Saved Interactive Reports."
- Manage Export Repository. Displays to the Manage Export Repository. Use the Manage Export Repository page to manage files in the current workspace. See "Managing Export Files in the Current Workspace."
- Websheet Database Objects. Use the Websheet Database Objects page to remove or validate the data objects associated with Websheets. See "Removing and Validating Websheet Database Objects."
- Request a New Workspace. Enables Workspace administrators to request a new workspace manually using the Request a Workspace wizard. See "Requesting a Workspace in Workspace Administration."



2.1.4 Resetting Your Password

Reset your password by clicking Change My Password under Tasks on the Workspace Administration page.

To reset your password from the Administration page:

🔷 Tip:

You can access many workspace administration functions (such as **Change My Password**) from both the Administration menu and the Workspace Administration home page. For consistency, this section navigates the user to the Workspace Administration home page.

- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. On the Tasks list, click **Change My Password**.
- 3. Under Change Password, enter the following:
 - Enter Current Password Enter your current password.
 - Enter New Password Enter your new password.
 - Confirm New Password Enter your new password again.
- 4. Click Apply Changes.

💉 See Also:

"Changing a User Account Password"

2.1.5 Viewing Product Release and Environment Information

Access the About Application Express page to view basic product information, including the Application Express release number, workspace name, environment details, and database information.

To view the About Application Express page:

- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.



2. On the Tasks list, click About Application Express.

The About Application Express page appears. The page is divided into these sections: About; Visit Oracle Online For More Information; CGI Environment; and Database Version.

The Details section displays the following information:

- Product build
- Schema compatibility
- Last DDL time
- Host schema
- Application Owner
- Workspace ID
- Workspace Name
- Current user
- Language Preference
- Current Time (on server)

CGI Environment provides information about the currently installed web server software such as currently defined parameters and variables.

Database Version lists details about the currently installed database version.

Character Set lists currently selected character sets. The selected character set determines the encoding scheme used to display characters on screen.

2.1.6 Managing Export Files in the Current Workspace

Use the Manage Export Repository to manage Export files in the current workspace.

Use the Manage Export Repository page in Workspace Administration to download or delete Export files.

- 1. To access the Manage Export Repository page:
- 1. Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. On the Tasks list, click Manage Export Repository.
- 3. To download a file, click the file name in the Download column..
- 4. To delete a file, select the file and click **Delete Checked**.



See Also:

- "Exporting and Importing a Workspace"
- "Exporting an Application and Application Components," "Importing Export Files," and "Installing Export Files" in *Oracle Application Express App Builder User's Guide*

2.1.7 Managing Saved Interactive Reports

View and delete saved interactive reports as well as manage interactive report subscriptions.

About Saved Interactive Reports

Oracle Application Express includes four types of saved interactive reports: Primary Default, Alternative Report, Public Report, and Private report. Both developers and end users can save interactive reports. However, only a developer can save the report that initially displays (called the Primary Default) or create an Alternative report.

- Viewing and Deleting Saved Interactive Reports View and delete saved interactive reports on the Saved Reports page.
 - Managing Interactive Report Subscriptions End users can receive updated versions of a report by subscribing to it. Workspace administrators can view and manage these subscriptions on the Subscriptions page.

See Also:

"Developing Reports" in Oracle Application Express App Builder User's Guide

2.1.7.1 About Saved Interactive Reports

Oracle Application Express includes four types of saved interactive reports: Primary Default, Alternative Report, Public Report, and Private report. Both developers and end users can save interactive reports. However, only a developer can save the report that initially displays (called the Primary Default) or create an Alternative report.

Oracle Application Express includes four types of saved interactive reports:

- **Primary Default** (Developer Only). This is the report that initially displays. Primary Default reports cannot be renamed or deleted.
- Alternative Report (Developer Only). Enables developers to create multiple report layouts. Only developers can save, rename, or delete an Alternative Report.
- **Public Report** (End user). Can be saved, renamed, or deleted by the end user who created it. Other users can view and save the layout as another report.



• **Private Report** (End user). Only the end user that created the report can view, save, rename, or delete the report.

Workspace administrators can view and manage these reports on the Saved Reports page.

2.1.7.2 Viewing and Deleting Saved Interactive Reports

View and delete saved interactive reports on the Saved Reports page.

To manage saved interactive reports:

- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. From the Tasks list, click Manage Interactive Report Settings.
- 3. Click Saved Reports.

The Saved Reports page appears.

You can customize the appearance of the page using the Search bar at the top of the page.

- 4. To delete a report:
 - a. Select the report to be removed.
 - b. Click Delete Checked.

2.1.7.3 Managing Interactive Report Subscriptions

End users can receive updated versions of a report by subscribing to it. Workspace administrators can view and manage these subscriptions on the Subscriptions page.

To manage interactive report subscriptions:

- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. From the Tasks list, click Manage Interactive Report Settings.
- 3. Click Subscriptions.

The Subscriptions page appears.

You can customize the appearance of the page using the Search bar at the top of the page.

- 4. To link to an application, page or region, click the appropriate hyperlink.
- 5. To delete a subscription:
 - a. Select the subscription to be removed.



b. Click Delete Checked.

2.1.8 Viewing a Workspace Summary

Use the Workspace Utilization report to view a comprehensive summary of the current workspace, including summaries of schemas, database applications, Websheet applications, SQL Workshop scripts and results, Team Development details, application activity, developer activity, and counts of database objects.

- Viewing the Workspace Utilization Report View the Workspace Utilization Report which details workspace activity and contents.
- Emailing the Workspace Utilization Report Email specific recipients a workspace summary report by clicking the Email button while viewing the Workspace Utilization Report.

2.1.8.1 Viewing the Workspace Utilization Report

View the Workspace Utilization Report which details workspace activity and contents.

To view the Workspace Utilization report:

- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. On the Workspace Administration page, click Manage Service.
- 3. Click Workspace Utilization.
- 4. From Show, select a time interval.
- 5. Scroll down to view the report.

2.1.8.2 Emailing the Workspace Utilization Report

Email specific recipients a workspace summary report by clicking the Email button while viewing the Workspace Utilization Report.

To email the Workspace Utilization report:

- 1. Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. On the Workspace Administration page, click Manage Service.
- 3. Click Workspace Utilization.
- 4. From Show, select a time interval.
- 5. To email the report:



- a. Click Email.
- **b.** In the Email form:
 - Reporting Periods Select a time interval for the report.
 - To Enter valid email addresses. Separate multiple entries with a comma.
 - Subject Enter text that describes the message.
 - Body Enter optional body text.
 - Click Email.

The report is automatically emailed to the specified recipients.

2.1.9 Removing and Validating Websheet Database Objects

Remove or validate the data objects associated with Websheets.

All Websheet application data is stored within tables owned by a schema associated with this workspace. The tables are all prefixed by APEX\$_. Workspace administrators use the Websheet Database Objects page to manage these tables.

To access the Websheet Database Objects page:

- 1. Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

2. On the Tasks list, click Manage Websheet Database Objects.

The Websheet Database Objects page appears.

- 3. Select one of the following and follow the on-screen instructions:
 - **Remove Websheet Database Objects** Drop Websheet database objects and data from your schema.
 - Validate Websheet Database Objects Validate the integrity of Websheet database objects and correct identified problems.

See Also:

"Creating Websheet Applications" in Oracle Application Express App Builder User's Guide



2.1.10 Requesting a Workspace in Workspace Administration

Request a workspace on the Workspace Administration page.

Note:

The **Request a New Workspace** option described in this topic only works if the workspace Provisioning Method is set to **Request** or **Automatic**. If the workspace Provisioning Method is set to **Manual**, an error displays. See "Selecting a Workspace Provisioning Mode".

- 1. To request a new workspace in the Workspace Administration:
- **1**. Sign in to Oracle Application Express.
- 2. At the top of the Workspace home page, click the **Administration** menu and select **Administration**

The Workspace Administration home page appears.

3. From Tasks on the right side of the page, click Request a New Workspace.

The Request a Workspace Wizard appears.

- 4. For Identification:
 - a. First Name Enter your first name.
 - b. Last Name Enter your last name.
 - c. Email Enter the email address. A validation link will be sent to this email address.
 - d. Workspace Enter a workspace name that name uniquely identifies your development environment.
 - e. Click Next.
- 5. Verify your request and click Submit Request.

Once you complete the Identification form, the following events occur:

- a. You will receive an email containing a verification link.
- **b.** When you click the verification link, the workspace is created.
- c. You will receive another email containing Sign In credentials (that is, the workspace name, username, and password).
- d. The status of the workspace request changes from Accepted to Approved.



See Also:

- "Requesting Another Workspace"
- "About the Workspace Request Approval Process"
- "Creating Workspaces in Administration Services"
- "Requesting a Workspace from the Sign In Dialog" in *Oracle Application Express Installation Guide*

2.2 Monitoring Activity Within a Workspace

Monitor developer activity and changes within a workspace by accessing the Monitor Activity page.

The Monitor Activity page features links to numerous reports that track page views, developer activity, active sessions and also view page view analysis reports, environment reports such as browser usage and click counts, and login reports. This section only describes a few reports in detail.

- Accessing the Monitor Activity Page Use the Monitor Activity page to view developer activity and application change information.
- Viewing Application Changes by Developer
 Access the Application Changes by Developer report displays the number of pages changed by each developer and offers a graphical representation of the information in either a bar chart or pie chart format.
- Viewing Application Changes by Day

Access the Application Changes by Day report displays a summary of the number of application changes by day. You have the option to view this information by month, as a line chart, or by developer.

Viewing Active Sessions

A session is a logical construct that establishes persistence (or stateful behavior) across page views. Use the Active Sessions report to view active sessions in the current workspace.

• Viewing Schema Reports and Other Reports

View reports that summarize of schema tablespace utilization, database privileges by schema, database schemas available in the workspace, detailed tablespace utilization, and Web Service log activity.

See Also:

"Viewing Workspace Dashboards," "Monitoring Activity Across a Development Instance," and "Creating Custom Activity Reports Using APEX_ACTIVITY_LOG" in Oracle Application Express App Builder User's Guide



2.2.1 Accessing the Monitor Activity Page

Use the Monitor Activity page to view developer activity and application change information.

To access the Monitor Activity page:

- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

2. Click Monitor Activity.

The Monitor Activity page appears and is divided into the following sections:

- **Page Views** Contains reports of page views organized by view, user, application, application and page, day, hour, and by interactive report.
- **Developer Activity** Offers reports of developer activity organized by developer, day, application, application changes, and day or month.
- Sessions Lists active sessions with the current workspace (report or chart).
- Page View Analysis Contains reports analyzing page views, such most viewed pages, page views by day, usage by day (chart), weighted page performance, and Websheet page views.
- **Environment** Contains reports of environments organized by user agent, browser, external clicks, or operating system.
- **Login Attempts** Offers reports listing login attempts, login attempts by authentication result, and a developer login summary.
- Application Errors Contains a report of application errors.
- Workspace Schema Reports Offers summaries of schema tablespace utilization, database privileges by schema, workspace schemas, and tablespace utilization.
- Archived Activity Reports Lists archived reports.
- **3.** Select a report to review.

2.2.2 Viewing Application Changes by Developer

Access the Application Changes by Developer report displays the number of pages changed by each developer and offers a graphical representation of the information in either a bar chart or pie chart format.

To view application changes by developer:

- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.



- 2. Click Monitor Activity.
- 3. Under Developer Activity, select **By Developer**.
- 4. Make a time selection from the Since list, an application (if applicable), and click **Set**.

You can customize the appearance of the page using the Search bar at the top of the page.

2.2.3 Viewing Application Changes by Day

Access the Application Changes by Day report displays a summary of the number of application changes by day. You have the option to view this information by month, as a line chart, or by developer.

To view application changes by day:

- 1. Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. Click Monitor Activity.
- 3. Under Developer Activity, click **By Day**.

The Application Changes by Day page appears.

4. Make a time selection from the Since list, an application (if applicable), and click **Set**.

You can customize the appearance of the page using the Search bar at the top of the page.

2.2.4 Viewing Active Sessions

A session is a logical construct that establishes persistence (or stateful behavior) across page views. Use the Active Sessions report to view active sessions in the current workspace.

• What is an Active Session?

An active session is a session that has not yet been purged from the sessions table.

Viewing the Active Sessions Report
 View the Active Sessions report to view active sessions in the current workspace.

See Also:

"Undertanding Session State Management" in Oracle Application Express App Builder User's Guide



2.2.4.1 What is an Active Session?

An active session is a session that has not yet been purged from the sessions table.

Whenever an application is run, the Application Express engine maintains a record in a database table in the Oracle Application Express schema. This table records a numeric identifier (or session ID), the authenticated (or public) user identifier, the creation date, and other information. The session is the key record that enables session state, or persistence, across page requests. By viewing the Active Sessions report, a developer or administrator can see who has been using applications in a workspace. An **active session** is a session that has not yet been purged from the sessions table. An **expired session** is a session which has been existing longer than its maximum lifetime or which has not been used for longer than its maximum idle time. A DBMS job runs every hour and purges expired sessions.

2.2.4.2 Viewing the Active Sessions Report

View the Active Sessions report to view active sessions in the current workspace.

To view active session details:

- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. Click Monitor Activity.
- 3. Under Sessions, select Active Sessions.

You can customize the appearance of the page using the Search bar at the top of the page.

4. Click a session ID to view the Session Details page.

2.2.5 Viewing Schema Reports and Other Reports

View reports that summarize of schema tablespace utilization, database privileges by schema, database schemas available in the workspace, detailed tablespace utilization, and Web Service log activity.

To view Schema Reports:

- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. Click Monitor Activity.
- 3. Under Workspace Schema Reports, click one of the following reports:
 - Schema Tablespace Utilization



- Database Privileges by Schema
- Workspace Schemas
- Report Tablespace Utilization (popup)
- Web Service Activity Log

Note:

With the exception of Report Tablespace Utilization, you can search or customize the reports using the Search bar and Actions menu at the top of the page.

2.3 Using the Manage Service Page

Use the Manage Service page to manage service requests, configure workspace preferences, edit workspace announcements, and view reports. Additionally, administrators use this page to clear log files, manage session state, clear cached content, manage Websheet database objects, and manage interactive report settings.

- Accessing the Manage Service Page Access the Manage Service page to manage service requests, configure workspace preferences, edit workspace announcements, and view reports.
- Manage Service Page
 Use the Manage Service page to manage service requests, configure workspace
 preferences, edit workspace messages, and view workspace utilization reports.

2.3.1 Accessing the Manage Service Page

Access the Manage Service page to manage service requests, configure workspace preferences, edit workspace announcements, and view reports.

To access the Manage Service page:

💡 Tip:

You can access many workspace administration functions (such as **Manage Service**) from both the Administration menu and the Workspace Administration home page. For consistency, this section navigates the user to the Workspace Administration home page.

- 1. Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

2. Click Manage Service.



The Manage Service page appears.



2.3.2 Manage Service Page

Use the Manage Service page to manage service requests, configure workspace preferences, edit workspace messages, and view workspace utilization reports.

↑ Manage Service							
Manage Service	About						
Hake a Service Request Request access to a database schema, additional storage, or to terminate the workspace.	Set Workspace Preferences Configure functionality available to developers within this workspace.	Use the Manage Service page to manage service requests, configure workspace preferences, edit announcements, view reports, clear log files and cached content, manage workspace metadata. Learn More					
Edit Message Edit the Workspace Message.	Workspace Utilization View the workspace summary report, including schema and activity details.						
Service	Workspace Schemas	Dashboards					
Workspace Name EXAMPLE	EXAMPLE	Workspace					
Database Applications 10		Activity					
Websheet Applications 1		Developer Activity					
Packaged Applications 4		Performance >					
SQL Scripts 4		Websheets >					
Schemas 1		Applications >					
Open Requests 0		Database					
		Manage Meta Data					
Recent Service Requests	Data Dictionary Cache						
		Developer Activity and > Click Count Logs					

Links displaying under Manage Service:

- Make a Service Request. Request a new schema, request additional storage space, or terminate a workspace. See "Making a Service Request."
- Set Workspace Preferences. Configure login controls, App Builder, SQL Workshop, PL/SQL editing capability, RESTful service support, and Team Development. See "Configuring Workspace Preferences."
- Edit Message. Create a message that displays on the Workspace home page and on the Workspace Administration page. See "Defining a Workspace Message in Workspace Administration."



 Workspace Utilization. View a summary report about the current workspace. See "Viewing a Workspace Summary."

Dashboards

The **Dashboards** region displays links to specific dashboards, including: Workspace, Users, Activity, Developer Activity, Performance, Websheets, Applications, and Database. See "Viewing Workspace Dashboards."

Manage Meta Data

Links displaying under Manage Meta Data:

- Data Dictionary Cache. View the Data Dictionary Cache report to manually refresh the Data Dictionary Cache. Wizards use this information when creating new applications and pages. See "Viewing or Refreshing the Data Dictionary Cache."
- Developer Activity and Click Count Logs Manually purge developer logs and the External Count Clicks log on the Log files page. See "Purging the Developer Activity and Click Count Log Files."
- Session State View session details for the current session or for recent sessions, purge the current session state, or purge sessions based on their age. See "Managing Session State for a Workspace."
- Application Cache View and purge cached regions and pages. See "Managing Page and Region Caching."
- Websheet Database Objects View the Websheet Database Objects page. See "Removing and Validating Websheet Database Objects."
- Application Build Status Configure Build Status at the workspace-level. See "Changing Build Status for Multiple Applications."
- File Utilization Use the File Utilization report to identify areas using excessive storage. See "Viewing a Workspace Summary."
- Interactive Report Settings View pages to view and manage saved interactive reports and manage email subscriptions. See "Managing Saved Interactive Reports."

2.4 Making a Service Request

Workspace administrators use the Request Service page to request a schema, add storage space, terminate a workspace, or request another workspace.

🚫 Tip:

You can access many workspace administration functions (such as **Manage Service, Make a Service Request**) from both the Administration menu and the Workspace Administration home page. For consistency, this section navigates the user to the Workspace Administration home page.




Determining the Space Available in a Workspace View the Detailed Tablespace Utilization report to determine the amount of free space available in a workspace. Oracle recommends viewing this report prior to requesting additional storage. Viewing the Service Request History for the Workspace View the Service Request History report to determine the status of prior service requests in a workspace . Requesting a New Schema Request a new schema by making a service request and selecting Request Schema. **Requesting More Storage** Request more storage for a workspace by making a service request and selecting Request Storage. **Requesting Another Workspace** Request another workspace using a service request. Terminating a Workspace Terminate a workspace by making a service request and selecting Request Termination. See Also:

"Managing Requests"

2.4.1 Determining the Space Available in a Workspace

View the Detailed Tablespace Utilization report to determine the amount of free space available in a workspace. Oracle recommends viewing this report prior to requesting additional storage.



Viewing the Detailed Tablespace Utilization Report
 Determine the amount of space available in a workspace by viewing the Detailed
 Tablespace Utilization Report.

2.4.1.1 Viewing the Detailed Tablespace Utilization Report

Determine the amount of space available in a workspace by viewing the Detailed Tablespace Utilization Report.

- 1. To view the Detailed Tablespace Utilization report:
- 1. Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.



b. At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. Click Manage Service.
- 3. Click Make a Service Request.
- 4. Click Detailed Tablespace Utilization Report (may take several seconds).

A report appears displaying the tablespace name, available bytes, amount used, amount free, and percentage used.

2.4.2 Viewing the Service Request History for the Workspace

View the Service Request History report to determine the status of prior service requests in a workspace .

Workspace developers and administrators can view the Service Request History report prior to requesting additional storage to determine whether prior storage requests have been declined due to some underlying error.

- 1. To view the Service Request History report:
- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. Click Manage Service.
- 3. Click Make a Service Request.
- 4. Expand Service Request History.

2.4.3 Requesting a New Schema

Request a new schema by making a service request and selecting Request Schema.

A schema is a named collection of database objects, including logical structures such as tables and indexes. A schema has the name of the database user who owns it.

- 1. To request a new schema:
- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. Click Manage Service.
- 3. Click Make a Service Request.
- 4. Click Request Schema.
- 5. On Request Database Schema, specify the following:



- a. Schema Select either Request a new schema or Use an existing schema.
- b. Schema Name Enter a new name or select one from the list.
- c. Click Next.
- 6. Click Finish.

2.4.4 Requesting More Storage

Request more storage for a workspace by making a service request and selecting Request Storage.

- **1.** To request more storage:
- 1. Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. Click Manage Service.
- 3. Click Make a Service Request.
- 4. Click Request Storage.

🖓 Tip:

To see the amount of free space available in the workspace, click **Detailed Tablespace Utilization Report (may take several seconds)**.

- 5. On Request Storage, specify the following:
 - a. Amount of Storage to Add Select the amount of storage to add.
 - b. Click Next.
- 6. Confirm your request by clicking Request Storage.

2.4.5 Requesting Another Workspace

Request another workspace using a service request.

- 1. To request a new workspace using a service request:
- 1. Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. Click Manage Service.
- 3. Click Make a Service Request.
- 4. Click Sign up for another workspace.

The Request a Workspace Wizard appears.



- 5. For Identification:
 - a. First Name Enter your first name.
 - b. Last Name Enter your last name.
 - c. Email Enter the email address. A link to activate your workspace will be sent to this email address.
 - d. Workspace Enter a workspace name that name uniquely identifies your development environment.
 - e. Click Next.
- 6. If defined, review and accept the service agreement and click Next.
- 7. Verify your request and click **Submit Request**.

- "Requesting a Workspace in Workspace Administration"
- "About the Workspace Request Approval Process"
- "Creating Workspaces in Administration Services"
- "Requesting a Workspace from the Sign In Dialog" in *Oracle Application Express Installation Guide*

2.4.6 Terminating a Workspace

Terminate a workspace by making a service request and selecting Request Termination.

- **1.** To terminate a workspace:
- 1. Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. Click Manage Service.
- 3. Click Make a Service Request.
- 4. Click Request Termination.
- 5. Confirm your request by clicking Next.

2.5 Configuring Workspace Preferences

Configure workspace preferences for workspace login controls, access to App Builder and SQL Workshop, support for PL/SQL editing and RESTful services, and access to Team Development.



Some workspace preferences can also be configured for an entire instance. If applicable, the section includes references to any instance-level settings.

🚫 Tip:

You can access many workspace administration functions (such as **Manage Service, Set Workspace Preferences**) from both the Administration menu and the Workspace Administration home page. For consistency, this section navigates the user to the Workspace Administration home page.

- Managing Workspace Account Login Controls
 Configure workspace account login controls such as account expiration and locking, maximum number of failed login attempts, and end user account password lifetime.
- Controlling Access to App Builder Control whether developers can access App Builder.
- Controlling Access to SQL Workshop Workspace administrators can control access to SQL Workshop. Use the SQL Workshop to access tools for viewing and managing database objects.
- Disabling PL/SQL Program Unit Editing for a Workspace Workspace administrators can control whether developers can edit and compile PL/SQL program units from Object Browser.
- Enabling RESTful Services and Defining a Path Prefix for a Workspace Workspace administrators can control whether RESTful Services are enabled in the current workspace.
- Configuring Team Development in an Existing Workspace Configure Team Development for a workspace.
- Configuring Session Timeout for a Workspace Use the Session Timeout attributes for a workspace to reduce exposure at the application-level for abandoned computers with an open web browser.

2.5.1 Managing Workspace Account Login Controls

Configure workspace account login controls such as account expiration and locking, maximum number of failed login attempts, and end user account password lifetime.

- About Login Controls
 Workspace administrators can configure login controls for an individual workspace.
- Configuring Workspace Account Login Controls Configure login controls for an individual workspace.

See Also:

"Configuring Authentication Controls for an Instance"



2.5.1.1 About Login Controls

Workspace administrators can configure login controls for an individual workspace.

Administrators can also configure login controls for an entire Oracle Application Express instance. For example, if an Instance administrator configures account login controls in Oracle Application Express Administration Services that configuration applies to all Application Express accounts in all workspaces across an entire instance.

If the Instance administrator does *not* enable login controls across an entire instance, then each Workspace administrator can configure the following controls on a workspace-by-workspace basis:

- End-user account expiration and locking
- A maximum number of failed login attempts for end-user accounts
- The password lifetime (or number of days an end-user account password can be used before it expires for end-user accounts

🔷 Tip:

This feature applies only to accounts created using the Application Express user creation and management. Application Accounts Authentication provides additional authentication security for applications. See "Managing Users in a Workspace."

2.5.1.2 Configuring Workspace Account Login Controls

Configure login controls for an individual workspace.

- **1.** To configure login controls for a workspace:
- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. Click Manage Service.
- 3. Click Set Workspace Preferences.
- 4. Under Account Login Control:
 - a. Account Expiration and Locking Make a selection to determine whether Application Express end user accounts can be expired or locked. This feature applies only to end-user accounts created using the Application Express user management interface. Options include: Enable or Disable.

This feature provides additional authentication security for applications. If you select **Enable**, user account passwords expire after a configurable time period, accounts will be locked after a configurable number of authentication failures, and account passwords can be set to expire after the first use.



If the Instance administrator sets the **Environment Setting Require User** Account Expiration and Locking to Yes, this means that this feature must be enabled for all workspaces, Account Expiration and Locking will display Enable and cannot be changed by the workspace administrator.

- b. Maximum Login Failures Allowed Enter a positive integer for the maximum number of consecutive unsuccessful authentication attempts allowed before an end-user account is locked. If you do not specify a value in this field, the instance-level setting for Maximum Login Failures Allowed is used.
- c. End User Account Lifetime (days) Enter a positive integer for the maximum number of days an end-user account password may be used before the account expires. If you do not specify a value in this field, the instance-level setting for Account Password Lifetime is used.
- 5. Click Apply Changes.

See Also:

"Configuring Authentication Controls for an Instance"

2.5.2 Controlling Access to App Builder

Control whether developers can access App Builder.

- 1. To control access to App Builder:
- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. Click Manage Service.
- 3. Click Set Workspace Preferences.
- 4. Scroll down to App Builder.
 - To Enable App Builder, select **Yes**.
 - To disable App Builder, select **No**.
- 5. Click Apply Changes.

🔿 Tip:

These settings can be overridden by an Instance administrator. See "Managing Component Availability for an Instance."



2.5.3 Controlling Access to SQL Workshop

Workspace administrators can control access to SQL Workshop. Use the SQL Workshop to access tools for viewing and managing database objects.

- 1. To control access to SQL Workshop:
- 1. Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. Click Manage Service.
- 3. Click Set Workspace Preferences.
- 4. Scroll down to SQL Workshop.
- 5. Under SQL Workshop, Enable SQL Workshop:
 - Yes- Enable access to SQL Workshop.
 - **No** Disable access to SQL Workshop.
- 6. Click Apply Changes.
 - 💡 Tip:

These settings can be overridden by an Instance administrator. See "Managing Component Availability for an Instance."

2.5.4 Disabling PL/SQL Program Unit Editing for a Workspace

Workspace administrators can control whether developers can edit and compile PL/SQL program units from Object Browser.

By default, developers can change and compile PL/SQL source code when browsing database procedures, packages, and functions in SQL Workshop Object Browser. Workspace administrators can disable PL/SQL program unit editing by selecting **Do not allow PL/SQL program unit editing** on the Set Workspace Preferences page.

- 1. To disable PL/SQL program unit editing:
- 1. Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. Click Manage Service.
- 3. Click Set Workspace Preferences.
- 4. Scroll down to SQL Workshop.



- 5. Under SQL Workshop, PL/SQL Editing, select one of the following:
 - Allow PL/SQL program unit editing
 - Do not allow PL/SQL program unit editing

Disabling this feature discourages developers from changing PL/SQL code directly from the Data Dictionary. If you select **Do not allow PL/SQL program unit editing**, developers can still create and replace PL/SQL program units using scripts or the SQL Command Processor.

6. Click Apply Changes.

See Also: "Disabling PL/SQL Program Unit Editing for an Instance" and "Using SQL Commands" in Oracle Application Express SQL Workshop Guide

2.5.5 Enabling RESTful Services and Defining a Path Prefix for a Workspace

Workspace administrators can control whether RESTful Services are enabled in the current workspace.

Tip:

RESTful Services requires that the web listener in your configuration uses Oracle REST Data Services release 2.0 or later.

To configure RESTful access:

- 1. To configure RESTful access:
- 1. Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. Click Manage Service.
- 3. Click Set Workspace Preferences.
- 4. Scroll down to SQL Workshop.
- 5. Under SQL Workshop, Enable RESTful Services:
 - Yes Enables developers to expose report regions as RESTful services.
 - **No** Prevents developers from exposing report regions as RESTful services.
- 6. Under SQL Workshop, Path Prefix:

Path Prefix only displays if Enabled RESTful Services is set to Yes.



In Path Prefix, specify the URI path prefix to be used to access RESTful Services in the current workspace. The default path prefix value is the name of the workspace.

For example, a workspace named **QA_1** could have a path prefix set to **QA**. In this case, path to the RESTful service:

http://www.example.com/apex/qa/hr/employees/

7. Click Apply Changes.

See Also:

- "Enabling RESTful Services for an Instance " to learn about enabling RESTful Services at the instance-level in the Administration Services application
- "Enabling Data Exchange with RESTful Services" in Oracle Application Express SQL Workshop Guide

2.5.6 Configuring Team Development in an Existing Workspace

Configure Team Development for a workspace.

To enable users to attach files to issue comments in Team Development, you must set the **Enable Issue File Repository** attribute for the workspace to Yes.

To configure Team Development for a workspace:

- 1. Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. Click Manage Service.
- 3. Click Set Workspace Preferences.
- 4. Under Team Development, configure the following:

🔵 Tip:

These settings do not affect existing workspaces.

- a. Enable Team Development Specify whether to enable Team Development in the current workspace. Select **Yes** or **No**.
- **b.** Enable Issue File Repository Specify whether to enable file upload in the Team Development central file repository:
 - Yes Select Yes to enable file upload.



- No Select No to disable file upload.
- c. Maximum File Size (in MB) Select the maximum file size for any file uploaded into the Team Development file repository. The default value is 15 MB.
- d. Enable Feedback File Repository Specify whether to enable file upload for Feedback:
 - Yes Selecting Yes creates a local APEX\$ table to store the files.
 - No Select No to disable file upload for Feedback.
- e. Maximum Feedback File Size (in MB) Select the maximum file size for any file uploaded into the Feedback file repository. The default value is 15 MB.
- 5. Click Apply Changes.

- "Configuring Team Development for New Workspaces"
- "Managing Team Development" in Oracle Application Express App Builder User's Guide

2.5.7 Configuring Session Timeout for a Workspace

Use the Session Timeout attributes for a workspace to reduce exposure at the application-level for abandoned computers with an open web browser.

Workspace administrators configure Session Timeout for a workspace on the Set Workspace Preferences page.

- 1. To configure Session Timeout attributes for a workspace:
- 1. Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. Click Manage Service.
- 3. Click Set Workspace Preferences.
- 4. Under Session Timeout:
 - a. Maximum Session Length in Seconds Define how long (in seconds) sessions can exist and be used by applications in this workspace. This setting is superseded by the corresponding application-level setting.
 - Enter a positive integer to control how long a session can exist.
 - Enter 0 to have sessions exist indefinitely.
 - Leave the value empty in order to use the time defined at the instancelevel.



- b. Maximum Session Idle Time in Seconds The Session Idle Time is the time between the last page request and the next page request. This setting is superseded by the corresponding application level setting.
 - Enter a positive integer to control the default idle time for sessions used by applications in this workspace.
 - Leave the value empty in order to use the idle time defined at the instance-level.
- c. Session Timeout Warning in Seconds The session timeout warning time defines (in seconds) how long before a session times out (either maximum session length, or maximum session idle time), to warn the user. For the maximum session idle time warning, the user will have the opportunity to extend the session. For maximum session length warning, the user will be prompted to save any work, to avoid loss of data when the session maximum time is reached. This setting is superseded by the corresponding application level setting. Options include:
 - Enter a positive integer to control the default idle time for sessions used by applications in this workspace.
 - Enter 0 to switch off session timeout warnings for sessions used by applications in this workspace.
 - Leave the value empty in order to use the warning time defined at instance level.
- 5. Click Apply Changes.

- "Configuring Session Timeout for an Instance"
- "About Utilizing Session Timeout" and "Session Management" in Oracle Application Express App Builder User's Guide

2.6 Defining a Workspace Message in Workspace Administration

Workspace administrators can quickly communicate with other users by creating workspace messages.

- About Workspace Messages Workspace messages enable administrators to quickly communicate with other users.
- Creating and Editing a Workspace Message Create or edit a workspace message from the Workspace Administration page.




See Also: "Defining a Workspace Message in Administration Services"

2.6.1 About Workspace Messages

Workspace messages enable administrators to quickly communicate with other users.

Workspace messages display both on the Workspace home page and on the Workspace Administration page. On the Workspace home page, workspace message display in the **Messages** region .

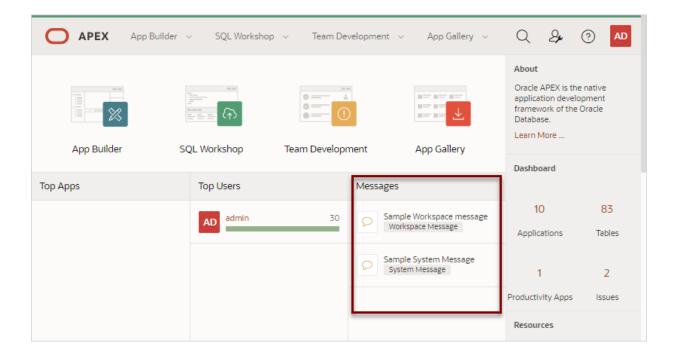

Workspace messages include a gold icon to the left of message text and the textual identifier, Workspace Message, displays beneath the message text.

Workspace messages also display in the center of the Workspace Administration page as shown in the next illustration.



Ο ΑΡΕΧ	App Builder 🗸	SQL Workshop 🗸 🗸	Team Development	✓ App Gallery ∨	Q & @ AD		
Sample System Mes	About						
		Workspace Administration enables you to manage your account. Depending on your privileges, you can monitor and administer this workspace. Learn More					
Manage Service	Tasks						
	Change My Password						
Workspace M	About Application Express						
Sample Workspace	Manage User Groups						
	Create User >						
Service		Users			Create Multiple Users		
Workspace Name	EXAMPLE	Users	4 Reporting	g Timeframe 3 hours	Delete Multiple Users		
Database Applications	10	Workspace Administrators	2 Page Ever	nts 69	Manage interactive /		
Websheet Applications	1	Application Developers	3 Median P	age Time 0.13	Report Settings		

2.6.2 Creating and Editing a Workspace Message

Create or edit a workspace message from the Workspace Administration page.

- **1.** To create or edit a workspace message:
- 1. Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

2. To create or edit a message, click the Edit Message icon.

O APEX	App Builder 🔍	SQL Workshop 🗸	Team De	velopment v	App Gallery 🗸 🗸	Q	2 ?) AD	
Sample System Mes	About	About							
								ation ge your on your onitor and pace.	
Manage Service	Tasks	Tasks							
	Change	Change My Password							
Morkenaco M	About	About Application Express > Manage User Groups >							
Workspace M Sample Workspace	Manag								
	Edit Message	it Message ^{er} >							
Service	Users Activity		Create	Create Multiple Users					
Workspace Name	EXAMPLE	Users	4	Reporting Timeframe 3 hours		Delete I	Delete Multiple Users		
Database Applications	10	Workspace Administrators	2	Page Events 6		Manage	Manage Interactive		
Websheet Applications	1	Application Developers	3	Median Page	Time 0.1	Report 13	Report Settings		

- 3. In Message, enter text. Use standard HTML tags to include formatting.
- 4. Click Apply Changes.

Tip:

You can also create or edit announcements by navigating to the Workspace Administration page and then clicking **Manage Service** and then **Edit Message**.

See Also:

"Defining a Workspace Message in Administration Services"

2.7 Managing Users in a Workspace

Create new user accounts, manage existing user accounts, and change user passwords.

🚫 Tip:

You can access many workspace administration functions (such as **Manage Service, Manage Users and Groups**) from both the Administration menu and the Workspace Administration home page. For consistency, this section navigates the user to the Workspace Administration home page.



- About Application Accounts Authentication
 Application Express Accounts authentication is a built-in authentication method in
 which user accounts are created and managed in the Oracle Application Express
 user repository. User accounts are particularly useful if your application is using
 Application Express Accounts authentication.
- About Application Express User Roles Oracle Application Express users are divided into four roles.
- Creating User Accounts Workspace administrators can create new user accounts one at a time, or create multiple accounts in a single operation.
- Editing Existing User Accounts Edit existing user accounts on the Manage Users and Groups page.
- Locking and Unlocking a User Account Control access to a workspace by locking and unlocking a user account.
- Changing a User Account Password
 Change user account passwords on the Manage Users and Groups page.
- Deleting User Accounts Workspace administrators can delete user accounts one at a time or delete multiple accounts in a single operation.
- Viewing the Users Dashboard

The Users Dashboard displays a summary of your account information, users in the current workspace, defined user groups, recently created users, and user status

Using Groups to Manage Application Express Users

Workspace administrators can create and manage Application Express users using groups. Groups enable administrators to categorize and manage user privileges.

See Also:

"Managing Workspace Account Login Controls" and "Managing Users Across an Application Express Instance"

2.7.1 About Application Accounts Authentication

Application Express Accounts authentication is a built-in authentication method in which user accounts are created and managed in the Oracle Application Express user repository. User accounts are particularly useful if your application is using Application Express Accounts authentication.

See Also:

"Application Express Account Credentials" in Oracle Application Express App Builder User's Guide



2.7.2 About Application Express User Roles

Oracle Application Express users are divided into four roles.

To access the Oracle Application Express development environment, users sign in to a shared work area called a workspace. Users are divided into the following primary roles:

- End users do not have access to development or administrative capabilities. End users cannot sign into a workspace and create applications. End users can only run existing database or Websheet applications.
- **Developers** are users who create and edit applications, monitor workspace activity, and view dashboards.
- Workspace administrators are users who perform administrator tasks specific to a workspace such as managing user accounts, monitoring workspace activity, and viewing log files.
- **Instance administrators** are superusers that manage an entire hosted instance using the Application Express Administration Services application. Instance administrators manage workspace provisioning, configure features and instance settings, and manage security.

2.7.3 Creating User Accounts

Workspace administrators can create new user accounts one at a time, or create multiple accounts in a single operation.

- Creating a New User Account Create new user accounts from the Manage Users and Groups page.
- Creating Multiple Users Simultaneously
 Create multiple new user accounts simultaneously.

2.7.3.1 Creating a New User Account

Create new user accounts from the Manage Users and Groups page.

To create a new user account:

- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. Click Manage Users and Groups.
- 3. Click Create User.

The Create User page appears.

- 4. Under User Identification, enter:
 - a. **Username** Enter the username used to sign in to the system. Restrictions include:



- Maximum length of 100 characters
- No spaces
- Only these special characters are permitted: ampersand (&) and period (.)

The username may also be used to reference user activity using the monitor applications. The bind variable :app_user returns the value of the current user when building applications.

- b. Email Address Enter the valid email address for this user.
- c. First Name Enter the first or given name to further identify the user (optional).
- d. Last Name Enter the last or family name to further identify the user (optional).
- e. **Description** Enter comments about this user (optional).
- f. **Default Date Format** Specify the default Oracle date format for the user. This option controls the default date format within SQL Workshop.
- 5. Under Account Privileges:
 - a. **Default Schema** Specify the default schema used for data browsing, application creation, and SQL script execution. When using workspaces that have more than one schema available, this schema is the default. This setting does not control security, only the user's preference.
 - **b.** Accessible Schemas (null for all) Leave this blank to enable the end user to access all schemas associated with the workspace.
 - c. User is a workspace administrator Select Yes or No to specify if this user should have workspace administrator privileges. Administrators are given access to all components. Additionally, they can manage user accounts, groups, and development services. Components may not be available if they are switched off by Instance administrators.
 - d. User is a developer Select Yes or No to specify if this user should have developer privileges. Developers must have access to either the App Builder, SQL Workshop, or both. Components may not be available if they are switched off by Instance Administrators.
 - e. App Builder Access Determines whether a developer has access to App Builder.
 - f. **SQL Workshop Access** Determines whether a developer has access to the SQL Workshop.
 - g. Team Development Access Determines whether a developer has access to the Team Development.
 - h. Set Account Availability Select Locked to prevent the account from being used. Select Unlocked to allow the account to be used. If the user has exceeded the maximum login failures allowed as defined in Workspace Preferences, then the account is locked automatically.
- 6. Under Password:
 - a. Password Enter a case-sensitive password.
 - b. Confirm Password Enter the password again.



- c. Require Change of Password On First Use Select Yes to require the user to change the password immediately when logging in the first time. Select No to allow the user to use the same password until it expires.
- 7. Under Group Assignments, specify the groups to which this user belongs. To assign a user to a group, select the group and click Move. To select multiple groups, press and hold the **CTRL** key and then click **Move All**. To remove a user from a group, select the group and click **Remove**.
- 8. Click Create User or Create and Create Another.

🚫 Tip:

An Instance administrator can configure these settings for an entire Oracle Application Express instance and define password complexity policies. See "About Authentication Controls," "About Strong Password Policies," and "Configuring Password Policies."

See Also:

"Using Groups to Manage Application Express Users" and "Adding and Removing Users from a Group"

2.7.3.2 Creating Multiple Users Simultaneously

Create multiple new user accounts simultaneously.

To create multiple users at once, enter or copy and paste email addresses separated by commas, semicolons, or new lines.Note that the password you specify will be assigned to each user and users will need to change their passwords upon login.

To create multiple user accounts simultaneously:

- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. Click Manage Users and Groups.
- 3. Click Create Multiple Users.

The Create Multiple Users page appears.

- 4. List of Email Addresses Enter or copy and paste email addresses separated by commas, semicolons, or new lines. Note that if you copy and paste email addresses from email messages, extraneous text will be filtered out.
- 5. Usernames Specify whether to include or exclude the domain name. Select one of the following:



- Set username to full email address Includes the full email address.
- Exclude @ domain as part of the username Removes all text after the @ symbol (for example, user1@xyz.com becomes user1)
- 6. Under Account Privileges:
 - a. **Default Schema** Specify the default schema used for data browsing, application creation, and SQL script execution. When using workspaces that have more than one schema available, this schema is the default. This setting does not control security, only the user's preference.
 - b. Accessible Schemas (null for all) Enter a colon-delimited list of schemas for which this developer has permissions when using the SQL Workshop. The list of schemas you enter here restricts the user to a subset of the full set of schemas provisioned for the workspace and determines what schema names the user sees in SQL Workshop.
 - c. Uses are workspace administrators Select Yes or No. Specify if these users should have workspace administrator privileges. Like developers, workspace administrators can create and modify applications and database objects. Additionally, they can also manage user accounts, groups, and development services.
 - d. Users are developers Select Yes or No. Specify if these users should have developer privileges. Developers can create and modify applications and database objects.
 - e. App Builder Access Access Determines whether a developer has access to App Builder. An administrator always has access to the App Builder. A Developer must have access to either the App Builder, the SQL Workshop, or both.
 - f. **SQL Workshop Access** Determines whether a developer has access to the SQL Workshop. An administrator always has access to SQL Workshop. A Developer must have access to either the App Builder, the SQL Workshop, or both.
 - g. Team Development Access Determines whether a developer has access to the Team Development. An administrator always has access to Team Development.
- 7. Under Password:
 - **Password** Specify a password. Passwords are case-sensitive. Developers can change their own passwords. Developers with Administrator privilege can change the passwords of users within the same workspace.
 - **Confirm Password** Enter the password again.
- 8. Click Next.
- 9. Click Create Valid Users.

"Using Groups to Manage Application Express Users" and "Adding and Removing Users from a Group"



2.7.4 Editing Existing User Accounts

Edit existing user accounts on the Manage Users and Groups page.

To edit an existing user account:

- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. Click Manage Users and Groups.
- 3. Select a user.

The Edit User page appears.

- 4. Edit the appropriate attributes. To learn more, see field-level Help.
- 5. Click Apply Changes.

See Also:

"Using Groups to Manage Application Express Users" and "Adding and Removing Users from a Group"

2.7.5 Locking and Unlocking a User Account

Control access to a workspace by locking and unlocking a user account.

To lock or unlock a user account:

- 1. Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.


The Workspace Administration home page appears.

- 2. Click Manage Users and Groups.
- 3. Select a user.

The Edit User page appears.

- 4. Scroll down to Account Privileges.
- 5. Under Account Privileges, Account Availability:
 - Locked Select this option to make the account unavailable.
 - Unlocked Select this option to make the account available.



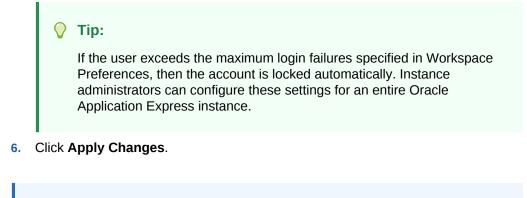

2.7.6 Changing a User Account Password

See Also:

Change user account passwords on the Manage Users and Groups page.

To change a user account password:

"Configuring Security"

- 1. Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. Click Manage Users and Groups.
- 3. Select a user.

The Edit User page appears.

- 4. Scroll down to Password. Under Password:
 - a. Password Enter a case-sensitive password.
 - b. Confirm Password Enter the password again.
 - c. Require Change of Password On First Use Select **No** to allow the user to use the same password until it expires. Select **Yes** to require the user of this account to change the password immediately after logging in the first time using the current password. This rule applies to the use of this account for workspace administration or development as well as to use of this account to sign in to running applications.
- 5. Click Apply Changes.





2.7.7 Deleting User Accounts

Workspace administrators can delete user accounts one at a time or delete multiple accounts in a single operation.

- Deleting a Single User Account Delete single user accounts on the Manage Users and Groups page.
- Deleting Multiple Users at Once
 Delete multiple user accounts at once on the Manage Users and Groups page.

2.7.7.1 Deleting a Single User Account

Delete single user accounts on the Manage Users and Groups page.

To delete a user account:

- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. Click Manage Users and Groups.
- 3. Select a user.

The Edit User page appears.

- 4. Click Delete User.
- 5. Confirm your selection and click OK.

2.7.7.2 Deleting Multiple Users at Once

Delete multiple user accounts at once on the Manage Users and Groups page.

To delete multiple user accounts in a single operation:

- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. Click Manage Users and Groups.
- 3. On the Tasks list, click **Delete Multiple Users**.

The Delete Multiple Users page appears.

- 4. Select the users to be deleted.
- 5. Click Delete Users.



2.7.8 Viewing the Users Dashboard

The Users Dashboard displays a summary of your account information, users in the current workspace, defined user groups, recently created users, and user status

To view the Users Dashboard:

- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

2. Click Dashboards.

The Dashboard page appears.

3. Click Users.

The Users Dashboard appears listing the following information:

- Your Account lists information about your account including your username, workspace, account credentials, and email address.
- Workspace Users lists statistics about all users in the current workspace.
- User Groups lists all currently defined user groups.
- **Recently Created** lists recently created users.
- **User Status** lists valid passwords, expired passwords, locked accounts, unlocked accounts, and any accounts for which no email address is defined.

See Also:

"Viewing Workspace Dashboards"

2.7.9 Using Groups to Manage Application Express Users

Workspace administrators can create and manage Application Express users using groups. Groups enable administrators to categorize and manage user privileges.

About Groups

Administrators can create user groups to restrict access to various parts of an application.

- Creating a Group Create user groups on the Groups page.
- Editing an Existing User Group Edit user groups on the Groups page.
- Adding and Removing Users from a Group Add and remove user groups on the Edit User page.



- Assigning a Group to Another Group Manage privileges by assigning application groups to user groups.
- Viewing Group Assignments

The Group Assignments page lists groups assigned to users and other groups. Use groups to categorize and manage privileges.

See Also:

"Managing Users in a Workspace" and About Application Accounts Authentication

2.7.9.1 About Groups

Administrators can create user groups to restrict access to various parts of an application.

Creating user groups enables administrators to:

- Control access to application components.
- Manage the privileges for a group of users. You can assign application groups to user groups to control user access.

User groups are not portable over different authentication schemes and are primarily useful when using Application Express Account Credentials authentication.

2.7.9.2 Creating a Group

Create user groups on the Groups page.

To create a new group:

- 1. Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. Click Manage Users and Groups.
- 3. Click Groups.
- 4. Click Create User Group.

On the User Group Page:

- a. Group Name Enter a name for group to be created.
- b. Description Enter a description for the group to be created.
- c. Group Grants The current group is a member of the groups on the right. To make the current group a member of an additional group, select the group and click Move. To remove group membership, select the group and click Remove.
- 5. Click Create Group.



2.7.9.3 Editing an Existing User Group

Edit user groups on the Groups page.

To edit an existing group assignment:

- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. Click Manage Users and Groups.
- 3. You can customize the appearance of the page using the Search bar at the top of the page.
- 4. Select a group.

The User Group page appears.

5. Make the appropriate edits and click **Apply Changes**.

2.7.9.4 Adding and Removing Users from a Group

Add and remove user groups on the Edit User page.

To add or remove a user from a group:

- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. Click Manage Users and Groups.
- 3. Select a user.

The Edit User page appears.

4. Scroll down to Group Assignments.

Each user belongs to the groups on the right.

- 5. To add a user to a group, select the group and click Move.
- 6. To remove a user from a group, select the group and click **Remove**.
- 7. Click Apply Changes.

2.7.9.5 Assigning a Group to Another Group

Manage privileges by assigning application groups to user groups.

To assign a group to another group:

1. Navigate to the Workspace Administration page:



- a. Sign in to Oracle Application Express.
- **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. Click Manage Users and Groups.
- 3. Click Groups.
- 4. Select the user group.
- 5. Scroll down to Group Grants.

The current group is a member of the groups on the right. To make the current group a member of an additional group, select the group and click **Move**. To remove group membership, select the group and click **Remove**.

6. Click Apply Changes.

2.7.9.6 Viewing Group Assignments

The Group Assignments page lists groups assigned to users and other groups. Use groups to categorize and manage privileges.

To view group assignments:

- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. Click Manage Users and Groups.
- 3. Click Group Assignments.
- 4. Select the grantee to edit.

2.8 Accessing the Data Dictionary Cache Report from Workspace Administration

Access the Data Dictionary Cache report from Workspace Administration to view statistics and data analysis of schema tables and caches in a workspace.

 Viewing or Refreshing the Workspace Data Dictionary Cache View or refresh the Data Dictionary Cache for a workspace in Workspace Administration.

See Also:

"Accessing the Data Dictionary Cache Report from Administration Services"



2.8.1 Viewing or Refreshing the Workspace Data Dictionary Cache

View or refresh the Data Dictionary Cache for a workspace in Workspace Administration.

The Create Application Wizard and Create Page Wizard use this information when creating new applications and pages. If the tables change due to DDL or DML modifications, the Oracle Application Express nightly job ORACLE_APEX_DICTIONARY_CACHE refreshes the Data Dictionary Cache. If the Data Dictionary Cache is incorrect or out of date, you can update the cache manually by clicking **Gather Statistics and Refresh Cache** or **Refresh Cache Only**.

- 1. To view or refresh the Data Dictionary Cache report for a workspace:
- 1. Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.
- 2. On the The Workspace Administration home page, click Manage Service.
- 3. Under Manage Meta Data on the right side of the page:
 - a. Click Data Dictionary Cache.

The Data Dictionary Cache report appears.

- b. To refresh the cache manually click either Gather Statistics and Refresh Cache or Refresh Cache Only.
- c. Click the workspace name.
- 4. To view cache for table:
 - a. Click the table name.

The Table Column Cache report appears. The **Facets Search Score** and **Facet Display** columns indicate how the Create Application Wizard and Create Page Wizard will render facets when creating a Faceted Search page.

b. To refresh the cache manually click either Gather Statistics and Refresh Cache or Refresh Cache Only.

See Also: "List of DBMS SCHEDULER Jobs"

2.9 Purging the Developer Activity and Click Count Log Files

Manually purge developer logs and the External Count Clicks log on the Log files page. Log entries older than one month are automatically deleted.



Tip:

You can access many workspace administration functions (such as **Manage Service**) from both the Administration menu and the Workspace Administration home page. For consistency, this section navigates the user to the Workspace Administration home page.

- Purging the Developer Activity Log The Developer Activity Log tracks changes to applications within the current workspace.
 - Purging the External Click Count Log The external Click Count Log counts clicks from an application to an external site. You can implement this functionality using the APEX UTIL.COUNT CLICK procedure.

See Also: "Managing Logs and Files"

2.9.1 Purging the Developer Activity Log

The Developer Activity Log tracks changes to applications within the current workspace.

To purge the Developer Activity Log:

- 1. Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. On the Administration page, click Manage Service.
- 3. Under Manage Meta Data, click Developer Activity and Click Count Logs.
- 4. Click the Manage Developer Activity Log tab.
- 5. Click Purge Developer Log.

2.9.2 Purging the External Click Count Log

The external Click Count Log counts clicks from an application to an external site. You can implement this functionality using the APEX_UTIL.COUNT_CLICK procedure.

To purge the external Click Count Log:

- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.



b. At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. On the Administration page, click Manage Service.
- 3. Under Manage Meta Data, click Developer Activity and Click Count Logs.
- 4. Click the Manage Click Counting Log tab.
- 5. Click Purge Click Log.

See Also:

"Viewing Workspace Dashboards" and "COUNT_CLICK Procedure" in Oracle Application Express API Reference

2.10 Managing Session State for a Workspace

A session establishes persistence (or stateful behavior) across page views. Workspace administrators can view session details for the current session or for recent sessions, purge the current session state, or purge sessions based on their age.

About Session State

A session is a logical construct that establishes persistence (or stateful behavior) across page views. Each session is assigned a unique ID, which the Application Express engine uses to store and retrieve an application's working set of data (or session state) before and after each page view. Sessions persist in the database until purged.

- Removing Session State After Reviewing Session Details
 Determine whether to remove existing sessions by first reviewing session details.

 From the Session Details page, administrators can remove the session record or
 session state.
- Viewing Session State for the Current Session
 View sessions state for the current session on the Session State page.
- Purging Sessions by Age Purge existing sessions by age on the Purge Sessions page.
- Purging Session State for the Current Session
 Purge session state for the current session on the Purge Session State page.

See Also:

- "Managing Session State for an Instance"
- Understanding Session State Management in Oracle Application Express App Builder User's Guide



2.10.1 About Session State

A session is a logical construct that establishes persistence (or stateful behavior) across page views. Each session is assigned a unique ID, which the Application Express engine uses to store and retrieve an application's working set of data (or session state) before and after each page view. Sessions persist in the database until purged.

See Also:

"What is Session State?" in Oracle Application Express App Builder User's Guide

2.10.2 Removing Session State After Reviewing Session Details

Determine whether to remove existing sessions by first reviewing session details. From the Session Details page, administrators can remove the session record or session state.

To view session details and remove session state:

- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. On the Administration page, click Manage Service.
- 3. Under Manage Meta Data, click Session State.
- 4. Click Recent Sessions.

You can customize the appearance of the page using the Search bar at the top of the page

- 5. To view session details, select the session ID.
- 6. On the Sessions Details page, click one of the following buttons:
 - **Remove State** clears the session data from the session state tables (including collections data) but does not remove the session record. Removing a session is a good approach for developers during debugging. This is the equivalent of clearing session state for the current session using the Clear Cache argument value SESSION in the f?p URL. This option might also be used by developers during debugging.
 - **Remove Session** removes the record of the session from the SESSIONS table along with the session state (including collections data) associated with the session. Any user using a session that has removed is no longer able to use the session and is prompted to re-authenticate upon their next page request (in most situations). This option can be used by administrators to ensure a specific user can no longer access an Oracle Application Express application.



"Debugging an Application" in Oracle Application Express App Builder User's Guide

2.10.3 Viewing Session State for the Current Session

View sessions state for the current session on the Session State page.

To view session state for the current or recent sessions:

- 1. Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. On the Administration page, click Manage Service.
- 3. Under Manage Meta Data, click Session State.
- 4. Click Session State for Current Session.

You can customize the appearance of the page using the Search bar at the top of the page

See Also:

"Removing Session State After Reviewing Session Details"

2.10.4 Purging Sessions by Age

Purge existing sessions by age on the Purge Sessions page.

To purge existing sessions by age:

- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. On the Administration page, click Manage Service.
- 3. Under Manage Meta Data, click Session State.
- 4. Click Purge Sessions by Age.
- 5. On Purge Sessions, make a selection from the Sessions older than list.



- 6. Click one of the following buttons:
 - **Report Sessions** generates a report detailing the total number of sessions for the workspace, the number of users, and the number of old sessions.
 - Purge Sessions purges existing sessions by the age you selected.

"Viewing Session State" in Oracle Application Express App Builder User's Guide

2.10.5 Purging Session State for the Current Session

Purge session state for the current session on the Purge Session State page.

To purge session state for the current session:

- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. On the Administration page, click Manage Service.
- 3. Under Manage Meta Data, click Session State.
- 4. Click Purge Session State for Current Session.
- 5. Click one of the following buttons:
 - View Session State Displays information about the current session.
 - Purge Session State Resets the session state for the current session.

2.11 Managing User Preferences

Developers can use preferences to store values for a specific Application Express user across distinct sessions. Once set, these preferences can be removed programmatically or manually. Administrators can set user preferences by creating a page process, by the calculation of a preference Item Source Value, or programmatically by using a PL/SQL API.

- Setting User Preferences
 Developers can set user preferences within an application by creating a page
 process, creating a preference item, or programmatically using a PL/SQL API.
- Viewing Preferences by User View user preferences by user on the Preferences by User page.
- Viewing Current User Preferences View current user preferences.
- Purging Preferences for a Specific User
 Purge preferences for a specific user on the Purge Preferences page.



- Purging Preferences for the Current User
 Purge preferences for the current user on the Current User Preferences page.
- Removing User Preferences Programmatically
 Remove user preferences programmatically using a PL/SQL API.
- Resetting User Preferences Using a Page Process Reset user preferences by creating a page process.

2.11.1 Setting User Preferences

Developers can set user preferences within an application by creating a page process, creating a preference item, or programmatically using a PL/SQL API.

- Setting User Preferences by Creating a Page Process Set user preference values by creating a page process.
- Setting the Source of an Item Based on a User Preference Set the source of an item based on a user preference by defining the item source type as Preference.
- Setting User Preferences Programmatically Set or reference user preferences programmatically using a PL/SQL API.

2.11.1.1 Setting User Preferences by Creating a Page Process

Set user preference values by creating a page process.

To set user preference values by creating a page process:

- **1.** View the page in Page Designer and click the **Processing** tab.
- Under Processes, right-click and select Create Process.
 Process attributes display in the Property Editor.
- 3. Under Identification:
 - Name Enter the name of the process.
 - Type Select User Preferences.
- 4. Under Settings, Type Select Reset Preferences (remove all preferences for current user).
- 5. Under Execution Options:
 - a. Sequence Specify the sequence for this component. The sequence determines the order of execution.
 - b. Point Select the point at which the process executes.
- 6. Review and complete any additional attributes.

🚫 Tip:

To learn more about an attribute, select the attribute in the Property Editor and click the **Help** tab in the center pane.

7. Click Save.

"Creating Page Processes" in Oracle Application Express App Builder User's Guide

2.11.1.2 Setting the Source of an Item Based on a User Preference

Set the source of an item based on a user preference by defining the item source type as Preference.

To define the source of item based on a user preference:

- **1.** View the page in Page Designer.
- 2. Click the **Rendering** tab.
- Locate the region to contain the item, right-click and select Create Page Item.
 Item attributes display in the Property Editor.

Note:

To learn more about an attribute, select the attribute and click the **Help** tab in the central pane.

- 4. Under Identification:
 - Name Enter a name of the item.
 - Type Select Hidden.
- Under Settings, Value Protected Specify whether the item is protected, preventing the value from being manipulated when the page is posted. Select Yes.
- 6. Under Layout:
 - Sequence Enter the display sequence for this item. The sequence and other layout settings determine where the item displays in relation to other items within the region.
 - Region Select the region in which the item displays. All items should be specified in a region.
- 7. Under Source:
 - a. Type Select the source type the value of this item is based on.
 - **b.** Used Select which value takes precedence (that is, the value from session state or the item source value).
- 8. Under Default, Type Select a default value type for this item.
- 9. Click Save.



2.11.1.3 Setting User Preferences Programmatically

Set or reference user preferences programmatically using a PL/SQL API.


User-level caching is available programmatically. You can use the SET_PREFERENCE procedure to set a user level preference called NAMED_PREFERENCE. For example:

```
APEX_UTIL.SET_PREFERENCE(
    p_preference=>'NAMED_PREFERENCE',
    p_value =>:ITEM_NAME);
```

You can reference the value of a user preference using the function GET_PREFERENCE. For example:

NVL(APEX_UTIL.GET_PREFERENCE('NAMED_PREFERENCE'),15)

In the previous example, the preference would default to the value 15 if the preference contained no value.

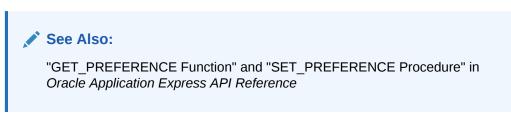

2.11.2 Viewing Preferences by User

View user preferences by user on the Preferences by User page.

To view the preferences by user:

- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. On the Administration page, click Manage Service.
- 3. Under Manage Meta Data, click Session State.
- 4. Click Preferences by User.

The Preferences by User page appears.

5. You can customize the appearance of the page using the Search bar at the top of the page.

2.11.3 Viewing Current User Preferences

View current user preferences.

To view current user preferences:



- **1.** Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. On the Administration page, click Manage Service.
- 3. Under Manage Meta Data, click Session State.
- 4. Click Current User Preferences.

The Current user Preferences page appears.

You can customize the appearance of the page using the Search bar at the top of the page.

2.11.4 Purging Preferences for a Specific User

Purge preferences for a specific user on the Purge Preferences page.

To purge preferences for a specific user:

- 1. Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. On the Administration page, click Manage Service.
- 3. Under Manage Meta Data, click Session State.
- 4. Click Purge Preferences by User.
- On the Purge Preferences page, select a specific user and click **Report**. A report appears at the bottom of the page.
- 6. To purge the displayed user preferences, click Purge User Preferences.

2.11.5 Purging Preferences for the Current User

Purge preferences for the current user on the Current User Preferences page.

To purge preferences for the current user:

- 1. Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. On the Administration page, click Manage Service.
- 3. Under Manage Meta Data, click Session State.
- 4. Click Purge Preferences for Current User.



- 5. Click View Preferences or Reset Preferences.
- 6. If you select View Preferences, the Current User Preferences page appears. To reset the user preferences, click **Reset**.

2.11.6 Removing User Preferences Programmatically

Remove user preferences programmatically using a PL/SQL API.

To remove user preferences programmatically, use the REMOVE_PREFERENCE procedure to remove a user level preference called NAMED_PREFERENCE. For example:

```
APEX_UTIL.REMOVE_PREFERENCE(
p_preference=>'NAMED_PREFERENCE');
```



2.11.7 Resetting User Preferences Using a Page Process

Reset user preferences by creating a page process.

To reset user preferences using a page process:

- 1. View the page in Page Designer and click the **Processing** tab.
- 2. Under Processes, right-click and select **Create Process**.

Process attributes display in the Property Editor.

🖓 Tip:

To learn more about an attribute, select the attribute in the Property Editor and click the Help tab in the center pane.

- 3. Under Identification:
 - Name Enter the name of the process.
 - Type Select Clear Session State.
- 4. Under Settings, Type Select Clear Current Session.
- 5. Under Execution Options:
 - a. Sequence Specify the sequence for this component. The sequence determines the order of execution.
 - b. Point Select the point at which the process executes.
 - c. Run Process Select the frequency at which the process executes.
- 6. Review and complete any additional attributes.
- 7. Click Save.



"Creating Page Processes" in Oracle Application Express App Builder User's Guide

2.12 Managing Page and Region Caching

Improve an application's performance by taking advantage of page and region caching.

Developers can configure page and region caching by setting the Caching attribute for a page or region. Workspace administrators can view and purge cached regions and pages.

Purging Cached Regions and Pages View and purge cached regions and pages on the Manage Application Cache

See Also:

page.

"Editing Page Attributes" and "Editing Region Attributes" in Oracle Application Express App Builder User's Guide

2.12.1 Purging Cached Regions and Pages

View and purge cached regions and pages on the Manage Application Cache page.

- 1. To view and purge cached regions:
- 1. Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. On the Administration page, click Manage Service.
- 3. Under Manage Meta Data, click Application Cache and select a purge option.
- 4. On the Application Cache page, click one of the following options:
 - Purge Cached Regions by Region Purge cache for a region by selecting one or more regions.
 - Purge Cached Regions by Application Purge all cached regions for the specified application.
 - **Purge Cached Regions by Workspace** Purge all cached regions for the current workspace.



- **Purge Cached Regions by Page** Purge all cached regions on a page by selecting one or more pages.
- **Purge Cached Regions by Application** Purge all cached pages for the specified application.
- **Purge Expired Cached Regions by Application** Purge only cached pages that have expired for the specified application.
- **5.** Follow the on-screen instructions.

2.13 Changing Build Status for Multiple Applications

Configure the Build Status attribute at the workspace-level to prevent an application from being modified by other developers.

- About Changing Application Build Status
 Use the Build Status attribute to prevent other developers from modifying an
 application.
- Managing Build Status in Workspace Administration Workspace administrators can change the Build Status of all applications within the current workspace on Application Build Status page.

See Also:

"Changing Build Status in Administration Services"

2.13.1 About Changing Application Build Status

Use the Build Status attribute to prevent other developers from modifying an application.

The Build Status attribute has two settings:

- Run and Build Application Developers can both run and edit an application.
- Run Application Only Developers can only run an application.

Selecting **Run Application Only** is an effective way to prevent other developers from modifying it.

Ways to Modify Build Status

You can modify the application Build Status in the following ways:

- **Application-level** Developers and administrators can change the Build Status attribute on the Edit Application page. See "Availability" in *Oracle Application Express App Builder User's Guide*.
- Workspace-level Workspace administrators can change the Build Status of all applications within the current workspace on Application Build Status page. See "Changing Build Status for Multiple Applications."
- **Instance-level** Instance administrators can change the Build Status of an application on the Build Status page in the Oracle Application Express



Administration Services application. See "Changing Application Build Status in Administration Services."

2.13.2 Managing Build Status in Workspace Administration

Workspace administrators can change the Build Status of all applications within the current workspace on Application Build Status page.

To manage application Build Status in Workspace Administration:

- 1. Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

- 2. On the Administration page, click Manage Service.
- 3. Under Manage Meta Data, click Application Build Status.

Next, select a status. Status specifies whether the application is available or unavailable for use.

- 4. For each application, select a **Status**. Options include:
 - Available Application is available with no restrictions.
 - Available with Developer Toolbar Application is available for use. For developers, the Developer toolbar displays at the bottom of each page.
 Requires the developer log into App Builder in the same browser session.
 - Available to Developers Only Application is available to users having developer privileges.
 - Restricted Access Application is available to developers named in the Restrict to comma separated user list.
 - Unavailable Application cannot be run or edited. The message in Message for unavailable application displays when users attempt to access the application.
 - Unavailable (Status Shown with PL/SQL) Application cannot be run or edited.
 - Unavailable (Redirect to URL) Application cannot be run or edited.
- 5. For each application, select a Build Status. Options include:
 - **Run and Build Application** Developers can both run and edit an application.
 - Run Application Only Developers can only run an application.
- 6. Click Apply Changes.

2.14 Viewing Workspace Dashboards

Use the Dashboard page to view details about the current workspace and monitor overall workspace activity.



- Accessing the Workspace Dashboards
 Use the Dashboard page to view details about the current workspace and monitor
 overall workspace activity.
- Workspace Dashboard View a summary of workspace users. Activity attributes display based on the selected time frame.
- Users Dashboard
 View a summary of workspace users. Activity attributes display based on the selected time frame.
- Activity Dashboard View a summary of workspace user activity for the selected time frame.
- Developer Activity Dashboard
 View a summary of developer application and page changes for the selected time frame.
- Performance Dashboard
 View pages having the worst page performance.
- Websheets Dashboard View a summary of websheet activity for the selected timeframe.
- Applications Dashboard View a summary of database applications.
- Database Dashboard View a summary of database objects by schema. Row counts are based on database table statistics.

See Also:

"Monitoring Activity Across a Development Instance" and "Creating Custom Activity Reports Using APEX_ACTIVITY_LOG" in Oracle Application Express App Builder User's Guide

2.14.1 Accessing the Workspace Dashboards

Use the Dashboard page to view details about the current workspace and monitor overall workspace activity.

To view the Administration Dashboard:

- 1. Navigate to the Workspace Administration page:
 - a. Sign in to Oracle Application Express.
 - **b.** At the top of the Workspace home page, click the **Administration** menu and select **Administration**.

The Workspace Administration home page appears.

2. Click the **Dashboards** icon.

The Dashboard page appears.

3. Select a dashboard to review:



- Workspace See "Workspace Dashboard."
- Users See "Users Dashboard."
- Activity See "Activity Dashboard."
- Developer Activity See "Developer Activity Dashboard."
- Performance See "Performance Dashboard."
- Websheets See "Websheets Dashboard."
- Applications See "Applications Dashboard."
- Database See "Database Dashboard."

2.14.2 Workspace Dashboard

View a summary of workspace users. Activity attributes display based on the selected time frame.

The **Workspace** dashboard offers a summary of workspace attributes and statistics, including:

- Service Lists the workspace name, the number and type of applications, SQL scripts, schemas, and open service requests.
- Available Schemas Lists schemas within the current workspace.
- Files Details the space used by specific file types.
- Recent Service Requests lists pending service requests.

2.14.3 Users Dashboard

View a summary of workspace users. Activity attributes display based on the selected time frame.

The Users dashboard displays a summary of workspace users, including:

- Your Account List your username, associated user roles, workspace name, creation date, and email address.
- Workspace Users Lists statistics about all users in the current workspace.
- User Groups Lists are currently defined user groups.
- Recently Created Lists recently created users.
- User Status Lists valid passwords, expired passwords, locked accounts, unlocked accounts, and any accounts for which no email address is defined.

See Also:

"Managing Users in a Workspace"



2.14.4 Activity Dashboard

View a summary of workspace user activity for the selected time frame.

The **Activity** dashboard displays a summary of workspace user activity for the selected time frame, including:

- Top Users Lists the most active users in the workspace.
- Top Applications Lists applications having the most activity.
- Top Pages Lists the application pages having the most activity.
- Recent Logins- Shows the time and date a user authenticated to an application.
- Recent Errors Lists errors that have occurred in the current workspace from the Application Express activity log.

2.14.5 Developer Activity Dashboard

View a summary of developer application and page changes for the selected time frame.

The **Developer Activity** dashboard displays a summary of developer application and page changes for the selected time frame, including:

- Top Developers Lists the most active developers in the workspace.
- Top Applications Lists the applications having the most developer activity.
- Top Pages Lists the application pages having the most developer activity.
- Recent Changes Lists changes by application, page, and user.
- Recent Application Edits Lists edits by application.

2.14.6 Performance Dashboard

View pages having the worst page performance.

The **Performance** dashboard displays a report of pages having the worst page performance. Page performance is calculated by multiplying page events by median elapsed server page generation time. Page events include page gets, page posts, and partial page gets.

2.14.7 Websheets Dashboard

View a summary of websheet activity for the selected timeframe.

The **Websheets** dashboard displays a websheet activity for the selected time frame. Sections include:

- Workspace Summary
- Recent Views
- Recently Created
- Recently Updated



2.14.8 Applications Dashboard

View a summary of database applications.

The **Applications** dashboard displays a summary of applications in the current workspace. Sections include:

- Summary Lists the number of applications, pages, and workspace themes.
- Application Groups Lists defined application groups.
- Recently Created Lists recently created applications.
- Defaults Lists defined defaults.

2.14.9 Database Dashboard

View a summary of database objects by schema. Row counts are based on database table statistics.

The **Database** dashboard displays a summary of database objects by schema. Row counts are based on database table statistics. Sections include:

- Recently Modified Program Units
- Object Counts
- Recently Created Tables
- Top Tables by Row Count

2.15 Leveraging App Builder Defaults

App Builder Defaults enable developers to reduce the number of steps needed to create a new application.

By configuring these attributes, developers can exit the Create Application Wizard early and can create a new application in two simple steps.

- About App Builder Defaults
 App Builder Defaults are specific to a workspace not individual developers.
- Configuring App Builder Defaults
 Configure App Builder Defaults.

2.15.1 About App Builder Defaults

App Builder Defaults are specific to a workspace not individual developers.

App Builder Defaults enable a workspace administrator to define preferences for tabs, authentication schemes, themes, and globalization attributes such as Default Language, Default Language Derived From, Date Format, Date Time Format, Timestamp Format, and Timestamp Time Zone Format. Once defined, developers can use these defaults when creating a new application or application components. For example, App Builder Defaults enable a developer to create a new application using the Create Application Wizard in two easy steps.



2.15.2 Configuring App Builder Defaults

Configure App Builder Defaults.

To configure App Builder Defaults:

- 1. On the Workspace home page, click the App Builder icon.
- 2. Click Workspace Utilities.
- 3. Click App Builder Defaults.

The Manage App Builder Defaults page appears and is divided into the following sections:

- Settings
- Theme
- Globalization
- 4. For each section of the page, select the appropriate default.

To learn more about an attribute, see field-level Help.

5. Click Apply Changes.



Oracle Application Express Administration Services

Instance administrators manage an entire Oracle Application Express hosted instance using the Oracle Application Express Administration Services (Administration Services) application.

Note:

The topics in this section are not applicable to all customers, specifically to those using a hosted instance. This section only applies to administrators who have access to the Oracle Application Express Administration Services application.

- What Is an Instance Administrator? Instance administrators manage an entire Oracle Application Express hosted instance.
- Signing In To Administration Services Sign in to Administration Services to manage an Oracle Application Express instance.
- Overview: Administration Services UI Key pages in Administration Services include: Administration Services, Manage Instance, and Manage Workspaces.
- Managing Requests

Approve and decline workspace service requests and change requests on the Manage Request page.

- Managing Instance Settings
 Use the Instance settings region of the Manage Instance page to configure feature
 availability, security, instance settings (that is, general workspace behavior), and
 workspace purge settings.
- Using the Productivity and Sample Applications Repository

Upload and manage custom applications uploaded to the Productivity and Sample Applications repository and monitor productivity and sample installations.

• Managing Public Themes Create public themes that are available to developers when they create an application or modify an existing application.

 Managing Meta Data Use the links under Manage Meta Data to view and manage session state, the mail queue, installed translations, and interactive report descriptions.



- Installing Exported Applications in a Runtime Environment Instance administrators manage the Oracle Application Express runtime environment using SQL*Plus and the APEX_INSTANCE_ADMIN API.
- Communicating with Users Using Messages and Task Lists
 Administrators can communicate with systsem users by creating messages
 (including login, system messages, and workspace messages) and Site-Specific
 Tasks lists.
- Managing Logs and Files Delete log entries and configure log intervals.
- Creating a Service Signup Wizard Instance administrators can create a Service Signup Wizard that users must complete before new workspace requests are submitted.
- Managing Schemas
 Manage the schemas within an Oracle Application Express instance.
- Creating Workspaces in Administration Services
 Users access Oracle Application Express by signing in to a shared work area
 called a workspace. An administrator can create workspaces manually in
 Administration Services or take advantage of an automated approach in which
 users click a link a login page.
- Managing Existing Workspaces Instance administrators can manage existing workspaces within an Oracle Application Express instance.
- Managing Users Across an Application Express Instance An Instance administrator manages all user accounts within an Oracle Application Express instance on the Manage Developers and Users page.
- Monitoring Activity Across a Development Instance Monitor all end user and developer activity for an Oracle Application Express instance.

🖍 See Also:

- "Workspace and Application Administration"
- "Understanding Administrator Security Best Practices" in Oracle Application Express App Builder User's Guide

3.1 What Is an Instance Administrator?

Instance administrators manage an entire Oracle Application Express hosted instance.

In Oracle Application Express, users sign in to a shared work area called a workspace. A workspace enables multiple users to work within the same Oracle Application Express installation while keeping their objects, data, and applications private. This flexible architecture enables a single database instance to manage thousands of applications.



Within a workspace, **End users** can only run existing database or Websheet applications. **Developers** can create and edit applications, monitor workspace activity, and view dashboards. Oracle Application Express includes two administrator roles:

- Workspace administrators are users who perform administrator tasks specific to a workspace.
- **Instance administrators** are superusers that manage an entire hosted Oracle Application Express instance which may contain multiple workspaces.

Instance administrators have all the rights and privileges available to developers and workspace administrators. In addition, instance administrators are responsible for managing an entire Oracle Application Express instance using the Oracle Application Express Administrators manage workspace provisioning, configure features and instance settings, and manage security.

🖓 Tip:

To learn more about creating an Instance Administrator account in a new installation, see the "Creating or Updating Your Instance Administration Account" section for your Web Listener in *Oracle Application Express Installation Guide*.

See Also:

- "Signing In To Administration Services"
- "Overview: Administration Services UI"
- "About Application Express User Roles"
- "What is a Workspace Administrator?"

3.2 Signing In To Administration Services

Sign in to Administration Services to manage an Oracle Application Express instance.

To access Administration Services:

- In a web browser, navigate to the Oracle Application Express Administration Services application. By default, Oracle Application Express Administration Services installs to the following location:
 - For Oracle REST Data Services, go to:

http://hostname:port/apex/apex_admin

Where:

 hostname is the name of the system where Oracle REST Data Services is installed.



- *port* is the port number assigned when configuring the Oracle REST Data Services. In a default installation, this number is 8080.
- apex is the service name defined when configuring the Oracle REST Data Services.
- For the embedded PL/SQL gateway, go to:

http://hostname:port/apex/apex_admin

Where:

- hostname is the name of the system where Oracle XML DB Protocol Server is installed.
- *port* is the port number assigned to HTTP on the Oracle XML DB Protocol Server. In a default installation, this number is 8080.
- apex is the Database Access Descriptor (DAD) defined in the configuration file.
- For Apache and mod_plsql, go to:

http://hostname:port/pls/apex/apex_admin

Where:

- hostname is the name of the system where Oracle HTTP Server is installed.
- *port* is the port number assigned to Oracle HTTP Server. In a default installation, this number is 7777.
- pls is the indicator to use the mod_plsql cartridge.
- apex is the Database Access Descriptor (DAD) defined in the mod_plsql configuration file.

For users who have upgraded from earlier releases, or who have a custom configuration, this value may be htmldb or something else. Verify your DAD with your Instance administrator.

The Sign In page appears.

- 2. In Username, enter the username of the Instance administrator.
- 3. In Password, enter your Instance administrator account password.

🚫 Tip:

As a post installation step, administrators can run the script apxchpwd.sql to create one or more Instance administrator accounts or change passwords for these accounts.

4. Click Sign In to Administration.

Oracle Application Express Administration Services appears.



See Also:

- Oracle REST Data Services Installation, Configuration, and Development Guide
- "Creating or Updating Your Instance Administration Account" section for your Web Listener in Oracle Application Express Installation Guide
- "Creating New User Accounts in Administration Services"

3.3 Overview: Administration Services UI

Key pages in Administration Services include: Administration Services, Manage Instance, and Manage Workspaces.

- Administration Services Home Page
 The Administration Services home page is the starting point for managing an entire Oracle Application Express instance.
- Manage Instance Page Instance administrators use the Manage Instance page to control and configure key features of an Oracle Application Express instance. Many of these links also display on the Instance Administration home page.
- Manage Workspaces Page

Instance administrators use the Manage Workspaces page to manage workspaces for an Oracle Application Express instance. A workspace is a shared work area where multiple developers can create applications. Each workspace has the privilege to parse as one or more database schemas.

See Also:

- "Managing Requests"
- "Monitoring Activity Across a Development Instance"

3.3.1 Administration Services Home Page

The Administration Services home page is the starting point for managing an entire Oracle Application Express instance.

The top of the Instance Administration home page features four icons:

- Manage Requests. Approve and decline workspace service requests and change requests. See "Managing Requests."
- Manage Instance. Control and configure key features of the Oracle Application Express instance. See "Manage Instance Page."
- **Manage Workspaces**. Create, remove and lock workspaces, manage workspace schema assignments, manage developers and users, view workspace reports,



import and export workspaces, and manage application behaviors. See "Manage Workspaces Page."

 Monitor Activity. View various reports on applications, developers, and session activity. See "Monitoring Activity Across a Development Instance."

Administration Services			Create Workspace >	About
				Access and perform administration tasks for an entire Oracle Application Express instance.
				Learn More
Ð				Provisioning
Manage Requests	Manage Instance	Manage Workspaces	Monitor Activity	By User Request with Email verification
			-	Instance Tasks
System Message Sample System Message			1	Jump to Workspace 🗸
				Feature Configuration >
Pending Requests	>	Workspace Summary	>	Security >
Provisioning Mode: Self-Service Provisioning		Workspaces	36	Instance Settings
		Schemas	40	Workspace Purge Settings
		Applications	452	REST Administration >
3	4	Users	161	
		Mail Queue Entries	1	Workspace Tasks
New Service	Service Change	Websheets	3	Create Workspace
Jobs		Security Settings	1	Create Multiple > Workspaces

System Message Region

The System Message region displays at the top of the page. Administrators can create a system message to communicate with other users within an instance. See "Defining a System Message."

Instance Tasks

The Instance Tasks region displays on the right side of the page and features the following links:

- Jump to Workspace. Enter a workspace name to quickly access Edit Workspace Information page. See "Managing Existing Workspaces."
- Feature Configuration. Manage configuration settings that apply to an entire Oracle Application Express instance. See "Managing Feature Configuration."
- Security. Manage security settings that apply to an entire Oracle Application Express instance. See "Configuring Security."
- **Instance Settings**. Manage settings that apply to an entire Oracle Application Express instance such as selecting the provisioning method for workspace



creation, configuring storage, and configuring support for email, wallets, and report printing. See "Configuring Instance Settings."

- Workspace Purge Settings. Configure purge behavior for inactive workspaces. See "Purging Inactive Workspaces."
- REST Administration Interface. Enable or disable REST Instance Administration Services.

Workspace Tasks Region

The Workspace Tasks region also displays on the right side of the page and features the following links:

 Create Workspace. Links to the Create Workspace Wizard. See "Creating Workspaces in Administration Services."

Note:

You can also access the Create Workspace Wizard by clicking the **Create Workspace** button at the top of the page.

- Create Multiple Workspaces. Links to the Create Multiple Workspace Wizard. See "Creating Multiple Workspaces."
- Find a Workspace. Displays a searchable report of all workspaces. See "Performing a Workspace Search."
- Manage Workspaces. Links to the Manage Workspaces page. See "Managing Existing Workspaces."
- Create User. Enables you to create a new user. See "Creating New User Accounts in Administration Services."
- Find a User. Displays a searchable report of all users in the current instance. See "Managing Users Across an Application Express Instance."
- **Reset User Password**. Links to the Manage Developer and Users page. To reset a user, click the user, edit the attributes under Password, and click Apply Changes. See "Editing an Existing User Account in Administration Services."

Available Updates

The Available Updates region indicates if updates are available for Oracle Application Express and the Oracle REST Data Services. If your installation is current the following message displays:

System is up-to-date

To configure updates, click **Set Preferences for Available Updates** icon which resembles a gear. The Available Updates dialog appears. You can enable or disable updates by selecting **Yes** or **No** from Check for Available Updates. To learn more, see field-level Help.



Tip:

To perform this check Application Express transmits the version number of Oracle Application Express and other system components to Oracle Corporation. To continuously improve our products, Oracle is interested in learning about product usage. To that end, statistics can occasionally be sent to Oracle describing the product features in use. No personally identifiable information is sent. To review Oracle's privacy policy, see:

http://www.oracle.com/us/legal/privacy/overview/index.html

3.3.2 Manage Instance Page

Instance administrators use the Manage Instance page to control and configure key features of an Oracle Application Express instance. Many of these links also display on the Instance Administration home page.

Instance Settings

Instance Settings contains the following links:

- Feature Configuration. Manage configuration settings that apply to an entire Oracle Application Express instance. See "Managing Feature Configuration."
- Security. Manage security settings that apply to an entire Oracle Application Express instance. See "Configuring Security."
- Instance Settings. Manage settings that apply to an entire Oracle Application Express instance such as selecting the provisioning method for workspace creation, configuring storage, and configuring support for email, wallets, and report printing. See "Configuring Instance Settings."
- Workspace Purge Settings. Configure purge behavior for inactive workspaces. See "Purging Inactive Workspaces."
- REST Administration Interface. Enable or disable the REST Administration Interface, register REST Client applications, view REST client details, or remove a REST client. See "Using the REST Administration Interface to View Usage Statistics."

Manage Shared Components

Manage Shared Components contains the following links:

- Productivity and Sample Applications. Manage productivity and sample applications available in an Oracle Application Express instance. See "Using the Productivity and Sample Applications Repository."
- **Public Themes**. Create and manage public themes for an instance. See "Managing Public Themes."

Manage Meta Data

Manage Meta Data contains the following links:

• Session State. Monitor and manage the session state repository. See "Managing Session State for an Instance."



- Mail Queue. Monitor the email messages in the mail queue. See "Managing the Mail Queue."
- Installed Translations. Links to the Installed Translation report which indicates which translations have been loaded for the Oracle Application Express instance. See "Viewing Installed Translations."
- Interactive Report Subscriptions. View and manage subscriptions created by end users using interactive reports in the instance. See "Deleting Interactive Report Subscriptions."

Messages

Messages contains the following links:

- Define Login Message. Enables an instance administrator to create and manage login message. See "Defining a Login Message."
- Define System Message. Enables an instance administrator to create and manage system message. See "Defining a System Message."
- Manage Site-Specific Tasks. Create and manage a Site-Specific Tasks lists. These links display on the Workspace home page and on the Workspace Login page. See "Managing a Site-Specific Tasks List."

Manage Logs and Files

Manage Logs and Files contains the following links:

- SQL Workshop Log. View SQL Workshop logs and delete log entries. See "Deleting SQL Workshop Logs."
- Page View Activity Log. View and delete User Activity log entries. See "Deleting Page View Activity Log Entries."
- Developer Activity Log. View and delete Developer Activity log entries. See "Deleting Developer Activity Log Entries."
- External Click Counting Log. View and delete External Click Counting log entries. See "Deleting Click Counting Log Entries."
- Login Access Log. View and delete Login Access log entries. See "Deleting the Login Access Log."
- Archive Activity Log. Create an archive of Application Express Activity log. See "Archiving the Activity Log."
- Web Service Activity Log. Create an archive of Web Service activity.

Self Service Sign Up

Self Service Sign Up contains the following links:

- Manage New Service Signup Wizard. Create and manage the New Service Signup Wizard. You can require users fill out a justification and accept an agreement and optionally respond to survey questions before the New Service Signup Wizard submits a request. See "Creating a Service Signup Wizard."
- Run New Service Signup Wizard. Run the New Service Signup Wizard. See "Running a New Service Signup Wizard."



3.3.3 Manage Workspaces Page

Instance administrators use the Manage Workspaces page to manage workspaces for an Oracle Application Express instance. A workspace is a shared work area where multiple developers can create applications. Each workspace has the privilege to parse as one or more database schemas.

Workspace Actions

Links displaying under Workspace Actions:

- **Create Workspace**. Create a new workspace using the Create Workspace wizard. See "Creating Workspaces in Administration Services."
- **Create Multiple Workspaces**. Create multiple workspaces using the Create Multiple Workspaces wizard. See "Creating Multiple Workspaces."
- Remove Workspace. Remove a workspace. See "Deleting a Workspace."
- Lock Workspace. Lock a workspace. Locking a workspace disables all workspace administrator, developer, and user accounts in the workspace and makes all applications unavailable. See "Locking a Workspace."
- Manage Workspace to Schema Assignments. View a report that lists the schemas in which a given workspace can build. When developers create new applications they must choose a schema from the list of schemas assigned to the workspace. See "Managing Workspace to Schema Assignments."
- Manage Developers and Users. To access the Oracle Application Express development environment, users sign in to a shared work area called a workspace. Use the Manage Developers and Users page to create, edit, and delete users. See "Managing Users Across an Application Express Instance."
- Manage Component Availability. View a report of Workspace Settings by workspace. To override the current settings, click the workspace name and edit the setting on the Workspace Settings page. See "Managing Component Availability for an Instance."

Workspace Reports

Links displaying under Workspace Reports:

- Existing Workspaces. View a report of provisioned workspaces. Click the workspace name to view details about a specific workspace. Click **Delete** in the action column to start the Remove Workspace Wizard. See "Managing Existing Workspaces."
- Workspace Details. Select a workspace and click Edit, Schema Assignments, and Manage Users to view key attributes about the workspace. See "Viewing the Workspace Details Report."
- Workspace Database Privileges. View a report of workspace database privilege details. To edit a workspace, click the workspace name. See "Viewing Workspace Database Privileges."
- Workspaces with Only Sample Application. View a report of workspaces containing only Sample Database Application. Use this report to gauge workspace activity. See "Viewing Workspaces with Only a Sample Application."



- Manage File Utilization. View the File Utilization by Workspace report. This report lists the workspace name, total file size, file counts, and the relative age of the newest and oldest files. Use this report to gauge workspace activity. See "Viewing File Size and File Count by Workspace."
- Find and Email Workspace Summary. View the Workspace Search report. Click the workspace name to view workspace details and email the report. See "Performing a Workspace Search."
- Data Dictionary Cache. View the Data Dictionary Cache report to manually refresh the Data Dictionary Cache. Wizards use this information when creating new applications and pages. See "Viewing or Refreshing the Data Dictionary Cache."

Export Import

Links displaying under Export Import:

- Import Workspaces. Links to the Import Workspace Wizard. Use this wizard to import a workspace into the export repository. See "Importing a Workspace in Administration Services."
- **Export Workspaces**. Links to the Export Workspace page. Use this page to select a workspace and access the Export Workspace Wizard. See "Exporting a Workspace in Administration Services."

Manage Applications

Links displaying under Manage Applications:

- Application Attributes. Links to the Application Attributes page key application attributes including the workspace name and ID, application ID, parsing schema, number of application pages, logging status, build status, application status, and application alias. See "Viewing the Application Attributes Report."
- **Build Status**. Displays the Build Status report. Use this report to review and change the Build Status attribute of any application in any workspace. See "Changing Application Build Status in Administration Services."
- **Parsing Schema**. Displays the Parsing Schema report. Use this report to identify the current parsing schema of each application in any workspace. See "Viewing the Parsing Schemas Report."

3.4 Managing Requests

Approve and decline workspace service requests and change requests on the Manage Request page.

- About Workspace Requests and Change Requests Instance administrators are responsible for approving or declining service requests made by workspace administrators.
- Viewing Requests on the Instance Administration Home Page View a summary of pending new service and change requests on the Instance Administration home page. The total number of pending requests displays in the Pending Requests region.
- Viewing Pending Requests View pending service requests on the Manage Requests page.



Managing Workspace Requests
 A Workspace Request enables a user to request a workspace by clicking a link on
 the Sign In page to access a request form.

Managing Change Requests A Change Request enables users to modify an existing workspace (for example, by adding a new schema or increasing the available disk space). Once submitted, the Instance administrator reviews and either approves or declines the change request

See Also: "Enabling Service Requests"

3.4.1 About Workspace Requests and Change Requests

Instance administrators are responsible for approving or declining service requests made by workspace administrators.

Service requests fall into one of two categories. A **Workspace Request** enables users to request workspaces directly in a self-service fashion. For example, users could click a link on the Sign In page to access a request form. Once the Instance administrator approves the workspace request, each user is automatically emailed the appropriate login information. To use workspace requests, an Instance administrator must select the Provisioning Method **Request** on the Instance Settings page.

A **Change Request** enables users to modify an existing workspace (for example, add a new schema or increase the disk space limit).

💉 See Also:

- "About Specifying How Workspaces Are Created"
- "Making a Service Request"

3.4.2 Viewing Requests on the Instance Administration Home Page

View a summary of pending new service and change requests on the Instance Administration home page. The total number of pending requests displays in the Pending Requests region.

To view a summary of new service and change requests on the Instance Administration home page:

1. Sign in to Oracle Application Express Administration Services.

The Pending Requests region lists the total number of new service requests and service change requests.

2. To view pending new service requests, click the New Service number.



The All Workspace Requests report appears listing the workspace name, schema, size, request date, and status.

- To approve or decline the request, click **Provision** in the Action column.
- To edit the provisioning request, click the Workspace name.
- **3.** To view pending change requests, click the **Service Change** number.

The All Change Requests report displays.

- To view a pending change requests, click View Request.
- Approve and deny the request as is appropriate.

3.4.3 Viewing Pending Requests

View pending service requests on the Manage Requests page.

To view pending service requests from the Manage Service Requests page:

- **1.** Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Requests.

The Manage Service Requests page appears and has three tabs:

- Open Requests displays all pending service requests and change requests.
- All Workspace Requests displays pending workspace requests.
- All Change Requests displays pending change requests.
- 3. Click **Open Requests** to view a pending new service requests and change requests.
 - To approve or decline a new request, click the **Edit** icon to the left of the request description.
 - Approve and deny the request as is appropriate.
- 4. Click All Workspace Requests to view a pending workspace requests.

The All Workspace Requests report appears listing the workspace name, schema, size, request date, and status.

- To approve or decline the request, click **Provision** in the Action column.
- To edit the provisioning request, click the Workspace name.
- 5. Click All Change Requests to view pending changes to existing services.

All Change Requests report appears listing the workspace name, request change description, requestor, and status.

6. To view a request, click View Request.

The View Change Request page appears.

- To approve the request, click Assign Schema.
- To deny a request, click **Deny Request**.
- To deny and delete a request, select **Delete this request if denying?** and then click **Deny Request**.



See Also: "Managing Workspace Requests" and "Managing Change Requests"

3.4.4 Managing Workspace Requests

A Workspace Request enables a user to request a workspace by clicking a link on the Sign In page to access a request form.

- About the Workspace Request Approval Process
 The Instance administrator specifies a Provisioning Method to determine how the workspace request process work.
- Approving or Declining a Pending Workspace Request Approve or decline pending workspace requests on the All Workspace Requests page.
- Changing the Status of an Existing Workspace Request Change the status of an existing workspace request on the All Workspace Requests page.
- Deleting a Workspace Request Delete workspace requests on the All Workspace Requests page.

See Also:

"About Workspace Requests and Change Requests" and "About Specifying How Workspaces Are Created"

3.4.4.1 About the Workspace Request Approval Process

The Instance administrator specifies a Provisioning Method to determine how the workspace request process work.

To determine how provisioning works, an Instance Administrator selects a Provisioning Method on the Instance Settings page:

- **Manual** An Instance administrator creates new workspaces and notifies the Workspace administrator regarding the Sign In credentials.
- **Request** Users request a workspace. Once an administrator approves the request, the user receives an email containing an email verification link. After the user clicks the email verification link, the workspace is created.
- Automatic Works similar to Request except requests are automatically approved with no administrator review required.



Note:

To enable users to request a workspace using a link on the Sign In page, the Instance administrator must choose either the Provisioning Method **Request** or **Automatic** and configure email. If the Provisioning Method is set to **Manual**, no link appears on the Sign In page.

About Request and Automatic Provisioning

If a workspace uses the Provisioning Methods **Request** or **Automatic**, the following events occur:

- 1. The user receives an email containing an email verification link.
- 2. When user clicks the verification link, the workspace is created.
- 3. The user receives another email containing Sign In credentials (that is, the workspace name, username, and password).
- 4. The status of the workspace request changes from Accepted to Approved.

Note:

To use the **Request** or **Automatic** Provisioning Methods, you must configure email. See "Configuring Email".

What Happens When an Error Occurs?

If an error occurs during the workspace creation process, the status of the request reverts to Requested and an email is sent to the user containing the following message:

Please contact administrator.

Once the issue is resolved, the administrator can again repeat the previous procedure and approve the request.



3.4.4.2 Approving or Declining a Pending Workspace Request

Approve or decline pending workspace requests on the All Workspace Requests page.

To approve or decline a pending workspace request:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Requests.



3. Click the All Workspace Requests tab.

The All Workspace Requests report appears listing the workspace name, schema, size, request date, and status.

- 4. To approve a request:
 - a. Click **Provision** in the Actions column.
 - **b.** On the Provisioning Administration page, click **Approve**.
 - c. Review the email message.
 - d. If needed, update the message and click Approve and Send Email.
- 5. To decline a request:
 - a. Click **Provision** in the Actions column.
 - b. On the Provisioning Administration page, click Decline.
 - c. Review the email message.
 - d. If needed, update the message, for example to add the reason for declining a request, and click **Decline and Send Email**.

The email is sent to the user notifying them the request was declined.

🖓 Tip:

If the instance has the Provisioning Status, **Request**, an email containing a verification link is sent to the user. To create the workspace, the user must click the verification link to create the workspace. See "About Specifying How Workspaces Are Created."

3.4.4.3 Changing the Status of an Existing Workspace Request

Change the status of an existing workspace request on the All Workspace Requests page.

To change the status of an existing workspace request:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Requests.
- 3. Click the All Workspace Requests tab.

The All Workspace Requests report appears listing the workspace name, schema, size, request date, and status.

- 4. To review all workspace requests, deselect the filter Status_Code = '1'.
- 5. Locate a request to review.
- 6. Click Adjust in the Actions column.

The Adjust Request page appears.

- 7. From the Project Status list, select a new status.
- 8. Click Apply Changes.



Note:

Be careful when setting the Project Status to **Requested**. Although **Requested** enables you to provision a workspace, it could result in data corruption due to the manner in which accounts are provisioned. The provisioning system assumes Requested workspace requests do not have the corresponding schemas and dictionary entries for a Workspace administrator or developers. If you must change the Project Status for an **Approved** workspace to **Requested**, terminate the service first and then change the status to Requested.

3.4.4.4 Deleting a Workspace Request

Delete workspace requests on the All Workspace Requests page.

To delete a workspace request:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Requests.
- 3. Click the All Workspace Requests tab.

The All Workspace Requests report appears listing the workspace name, schema, size, request date, and status.

- 4. Click the workspace name.
- 5. On the Edit Provisioning Request page, select the appropriate button:
 - If the Project Status is Approved, click Terminate or Delete.
 - If the Project Status is Declined, Requested, Terminated, Or Accepted, Click Delete.
- 6. Click Delete Request.

3.4.5 Managing Change Requests

A Change Request enables users to modify an existing workspace (for example, by adding a new schema or increasing the available disk space). Once submitted, the Instance administrator reviews and either approves or declines the change request

 Approving or Declining a Pending Change Request Approve or decline pending change requests on the All Workspace Requests page.

See Also:

"About Workspace Requests and Change Requests"



3.4.5.1 Approving or Declining a Pending Change Request

Approve or decline pending change requests on the All Workspace Requests page.

To approve or decline a pending change request:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Requests.
- 3. Click the All Change Requests tab.
- 4. Locate the request and click View Request under the Action column.

The View Change Request page appears. Note that the buttons that display depend upon the nature of the change request.

- 5. To approve the request, click one of the following:
 - Create Schema Approves a schema request.
 - Deny Request Denies the current change request.
 - Add Space Approves a request for additional disk space.
 - Terminate Service Approves a request to terminate the service.

3.5 Managing Instance Settings

Use the Instance settings region of the Manage Instance page to configure feature availability, security, instance settings (that is, general workspace behavior), and workspace purge settings.

Managing Feature Configuration

Use the Feature Configuration page to configure the Application Development settings, Application Installation Options, SQL Workshop functionality, database and activity monitoring, RESTful service, service requests, and Team Development.

Configuring Security

Instance administrators can configure instance security, including service-level security, configuring support for Real Application Security, configuring session time out, preventing browser attacks by isolating workspaces, excluding domains from regions and Web services, configuring authentication controls, creating strong password policies, restricting access by Database Access Descriptor (DAD), and managing authorized URLs.

Configuring Instance Settings

Control a variety of general settings for an Oracle Application Express development instance including configuring workspace provisioning behavior, storage, email, wallet information, report printing, Help menu, workspace size options, and application ID ranges.

Purging Inactive Workspaces Inactive workspaces consume valuable storage space and degrade system performance. Instance administrator can configure an instance to periodically purge inactive workspaces.



 Using the REST Administration Interface to View Usage Statistics The REST Administration Interface enables Instance administrators to automatically fetch usage metrics for an Oracle Application Express instance with a REST client.

3.5.1 Managing Feature Configuration

Use the Feature Configuration page to configure the Application Development settings, Application Installation Options, SQL Workshop functionality, database and activity monitoring, RESTful service, service requests, and Team Development.

Configuring Application Development Settings

Configure Application Development settings including: Allow PL/SQL Program Unit Editing, Create demonstration objects in new workspaces, Create Websheet objects in new workspaces, Enable SQL Access in Websheets, and Number of backups per application.

- Configuring Application Installation Options Configure Application Installation Options when installing new productivity or sample applications.
- Configuring SQL Workshop
 Configure basic SQL Workshop behavior for an instance.
- Configuring Monitoring Configure monitoring including: Database Monitoring (SQL Workshop), Application Activity Logging, Web Service Activity Logging, and Web Service Activity Logging.
- Enabling RESTful Services for an Instance Controls the ability to create and access RESTful Services mapped to SQL and PL/SQL.
- Enabling Service Requests Determine if workspace administrators to make service requests from Workspace Administration.
- Configuring Team Development for New Workspaces

Configure the following Team Development settings for new workspaces: Enable Issue File Repository, Maximum Issue File Size, Enable Feedback File Repository, and Maximum Feedback File Size.

See Also:

"Managing Component Availability for an Instance"

3.5.1.1 Configuring Application Development Settings

Configure Application Development settings including: Allow PL/SQL Program Unit Editing, Create demonstration objects in new workspaces, Create Websheet objects in new workspaces, Enable SQL Access in Websheets, and Number of backups per application.

 Disabling PL/SQL Program Unit Editing for an Instance Control if PL/SQL program unit editing is available in an instance.



- Enabling the Creation of Demonstration Objects in New Workspaces
 Enable the creation of demonstration applications and demonstration database objects when creating new workspaces.
- Enabling the Creation of Websheet Objects in New Workspaces Enable the creation of Websheet objects when creating new workspaces.
- Enabling and Disabling SQL Access in Websheets Control the ability to use SQL tags and the ability to create SQL reports in Websheets.
- Configuring the Number of Application Backups Configure the number of application backups.

3.5.1.1.1 Disabling PL/SQL Program Unit Editing for an Instance

Control if PL/SQL program unit editing is available in an instance.

By default, developers can change and compile PL/SQL source code when browsing database procedures, packages, and functions in Object Browser. Instance administrators can control if PL/SQL program unit editing is available on an Oracle Application Express instance.

- 1. To disable PL/SQL program unit editing:
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Feature Configuration.
- 4. Locate the Application Development section.
- 5. For Allow PL/SQL Program Unit Editing, select No.
- 6. Click Apply Changes.



3.5.1.1.2 Enabling the Creation of Demonstration Objects in New Workspaces

Enable the creation of demonstration applications and demonstration database objects when creating new workspaces.

When creating a new workspace, an Instance administrators can create demonstration objects by enabling the **Create demonstration objects in new workspaces** attribute. Setting this attriute to **Yes**, creates demonstration applications and demonstration database objects in new workspaces.

- **1.** To enable the creation of demonstration database objects in a new workspace:
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Feature Configuration.
- 4. Locate the Application Development section.



- 5. For Create demonstration objects in new workspaces, select Yes to include demonstration applications and demonstration database objects when creating new workspace. To disable the creation of demonstration applications, select No.
- 6. Click Apply Changes.

3.5.1.1.3 Enabling the Creation of Websheet Objects in New Workspaces

Enable the creation of Websheet objects when creating new workspaces.

When creating a new workspace, an Instance administrators can create demonstration Websheet objects by enabling the attribute, **Create Websheet objects in new workspaces**. Setting this attribute to **Yes**, creates a sample Websheet application and other sample database objects in new workspaces.

- 1. To enable the creation of sample Websheet objects in a new workspace:
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Feature Configuration.
- 4. Locate the Application Development section.
- 5. For Create Websheet objects in new workspaces, select Yes. To disable the creation of Websheet objects, select No.
- 6. Click Apply Changes.

3.5.1.1.4 Enabling and Disabling SQL Access in Websheets

Control the ability to use SQL tags and the ability to create SQL reports in Websheets.

An Instance administrator can control the ability to use SQL tags and to create SQL reports in Websheets. By default, this setting is disabled.

- 1. To control SQL access in Web sheets:
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Feature Configuration.
- 4. Locate the Application Development section.
- 5. For Enable SQL Access in Websheets, select Yes or No.
- 6. Click Apply Changes.

3.5.1.1.5 Configuring the Number of Application Backups

Configure the number of application backups.

Backups provide a simple means for developers to recover applications that may have been unexpectedly modified or deleted. Older backups are deleted during daily maintenance to make room for new ones. A value of null or zero (0) disables the automated backup feature. No more than 30 backups are kept per application.

- 1. To configure the number of application backups:
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.



- 3. Under Instance Settings, click Feature Configuration.
- 4. Locate the Application Development section.
- 5. For Number of backups per application, enter the maximum number of backups to keep per application. Enter a value of null or zero (0) to disable automated backup.
- 6. Click Apply Changes.

See Also:

- "Viewing the Backup Log"
- "Managing Application Backups" in Oracle Application Express App Builder User's Guide

3.5.1.2 Configuring Application Installation Options

Configure Application Installation Options when installing new productivity or sample applications.

- **1.** To configure application installation options:
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Feature Configuration.
- 4. Locate the Application Installation Options section.
- 5. For Allow HTTP Header Variable authentication, select Yes to allow this type of authentication scheme when installing new productivity or sample applications.
- 6. For Allow LDAP Directory authentication, select Yes to allow this type of authentication scheme when installing new productivity or sample applications.
- For Allow Oracle Application Server Single Sign-On authentication, select Yes to allow this type of authentication scheme when installing new productivity or sample applications.
- 8. Click Apply Changes.

See Also:

"Utilizing the App Gallery" in Oracle Application Express App Builder User's Guide

3.5.1.3 Configuring SQL Workshop

Configure basic SQL Workshop behavior for an instance.

Instance administrators can configure SQL Workshop behavior for an instance.

1. To configure SQL Workshop:



- **1.** Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Feature Configuration.
- 4. Locate the SQL Workshop section.
- 5. Under SQL Workshop, configure the following attributes described in the following table:

Attribute	Description	
SQL Commands Maximum Inactivity in minutes	Identify the maximum amount of time a transactional command in the SQL Command Processor waits before timing out.	
SQL Scripts Maximum Script Output Size in bytes	Identify the maximum amount of output a single SQL script can generate. Run SQL scripts in SQL Workshop.	
SQL Scripts Maximum Workspace Output Size in bytes	Identify the maximum amount of space all scripts within a workspace may consume. SQL Script results are the output generated when running SQL Scripts from the SQL command processor.	
SQL Scripts Maximum Script Size in bytes	Identify the maximum size of a SQL script used within the SQL Workshop.	
Enable Transactional SQL Commands	Enable Transactional SQL Commands for the entire instance. Enabling this feature permits users of SQL Commands to issue multiple SQL commands within the same physical database transaction. Select Yes or No .	
Maximum File size for Data Loading in bytess	Provide the overall maximum file size for SQL Workshop Data Loading. Note that smaller limits exist for XML and XSLX files as well as for JSON files on Oracle Database 11.2 and 12.1. This setting configures the overall file size limitation for all file types.	
Data Loading Job Class	Identify the DBMS_SCHEDULER Job Class for SQL Workshop Data Loading jobs. This setting enables you to assign Data Loading jobs to a specific Resource Manager Consumer group. If not set, the job class SYS.DEFAULT_JOB_CLASS is used	
	To see an example, see field-level Help. For more information on job classes, see the <i>Oracle Database Administrator's Guide</i> .	

6. Click Apply Changes.

See Also:

- "Job Classes" in Oracle Database Administrator's Guide
- "Getting Started with SQL Workshop" in Oracle Application Express SQL Workshop Guide



3.5.1.4 Configuring Monitoring

Configure monitoring including: Database Monitoring (SQL Workshop), Application Activity Logging, Web Service Activity Logging, and Web Service Activity Logging.

- Enabling Database Monitoring Enabling database monitoring in SQL Workshop.
- Enabling Application Activity Logging Configure application activity logging for all applications on the instance.
- Enabling Web Service Activity Logging Configure web service activity logging for all workspaces on the instance.
- Enabling Application Tracing Control application tracing at the instance-level.

3.5.1.4.1 Enabling Database Monitoring

Enabling database monitoring in SQL Workshop.

Before you can access the Database Monitoring page in SQL Workshop, an Instance administrator must enable database monitoring. See "Monitoring the Database" in *Oracle Application Express SQL Workshop Guide*

Note:

Only users having a database user account that has been granted a DBA role can access the Database Monitor page.

Setting **Enable Database Monitoring** to **Yes** enables monitoring within SQL Workshop.

- **1.** To enable database monitoring:
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Feature Configuration.
- 4. Locate the Monitoring section.
- 5. For Enable Database Monitoring, select Yes.
- 6. Click Apply Changes.

3.5.1.4.2 Enabling Application Activity Logging

Configure application activity logging for all applications on the instance.

- **1.** To configure application activity logging:
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Feature Configuration.



- 4. Locate the Monitoring section.
- 5. For Application Activity Logging, select one of the following:
 - Use Application Settings (default) Use the Logging attribute of each application to determine if activity is logged.
 - Never Disable activity logging for all applications in the instance.
 - Always Enable activity logging for all applications in the instance.
 - Initially Disabled for New Applications and Productivity Applications -Application logging disabled for new applications and productivity or sample applications.
- 6. Click Apply Changes.

See Also:

"Monitoring Activity Across a Development Instance"

3.5.1.4.3 Enabling Web Service Activity Logging

Configure web service activity logging for all workspaces on the instance.

- **1**. To configuring web service activity logging:
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Feature Configuration.
- 4. Locate the Monitoring section.
- 5. For Web Service Activity Logging, select one of the following:
 - **Use Application Settings (default)** Use the Web Service Logging attribute of each workspace to determine if activity is logged.
 - Never Disable web service activity logging for all workspaces in the instance.
 - Always Enable web service activity logging for all workspaces in the instance.
- 6. Click Apply Changes.



3.5.1.4.4 Enabling Application Tracing

Control application tracing at the instance-level.

Instance administrators can control whether developers or users can generate database trace files simply by specifying &p_trace=YES on the URL when displaying a



page. The ability to generate a trace file is already controlled if **Debug** is enabled for the application.

- 1. To configure application tracing
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Feature Configuration.
- 4. Scroll down to Monitoring.
- 5. From Enable Application Tracing, select one of the following:
 - Yes Any application which has Debug enabled can also generate a serverside database trace file for a page using &p_trace=YES on the URL.
 - No Tracing cannot be enabled for any application on the instance. If someone attempts to run an application with &p_trace=YES in the URL, the page renders but the request to generate the SQL trace file is silently ignored.
- 6. Click Apply Changes.

See Also:

- "Monitoring Activity Across a Development Instance"
- "Enabling SQL Tracing and Using TKPROF" in Oracle Application Express App Builder User's Guide
- "Available Parameter Values" in Oracle Application Express API Reference to learn about the TRACING_ENABLED parameter

3.5.1.5 Enabling RESTful Services for an Instance

Controls the ability to create and access RESTful Services mapped to SQL and PL/ SQL.

Tip:

RESTful Services can also be enabled or disabled for individual workspaces.

- 1. To enable RESTful Services:
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Sign in to Oracle Application Express.
- 3. Click Manage Instance.
- 4. Under Instance Settings, click Feature Configuration.
- 5. Locate the **REST** section.
- 6. Under **REST**, edit the following attributes:



Attribute	Description
Enable RESTful Services	Controls the ability to create and access RESTful Services mapped to SQL and PL/SQL.
Swagger UI URL	Defines a URL pointing to the SWAGGER UI 2.0+ server used by the ORDS REST Workshop when generating documentation for a module. If a URL is specified, the URI to the web service's swagger documentation is passed to the Swagger UI server. If a there is no URL specified, raw JSON is produced.
	Note : In order to generate the documentation the Swagger UI server must be able to reach the referenced web service URI. When using a third party Swagger UI service, review its privacy policy to understand how information it collects may be used and shared.

7. Click Apply Changes.

See Also:

- "Enabling RESTful Services and Defining a Path Prefix for a Workspace"
- "Enabling Data Exchange with RESTful Services" in Oracle Application
 Express SQL Workshop Guide

3.5.1.6 Enabling Service Requests

Determine if workspace administrators to make service requests from Workspace Administration.

Service Requests include the ability to request a new schema, request storage, or request termination of their workspace.

- 1. To enable service requests:
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Feature Configuration.
- 4. Locate the Workspace Administration section.
- 5. For Enable Service Requests, select Yes.
- 6. Click Apply Changes.

See Also: "Managing Requests"




3.5.1.7 Configuring Team Development for New Workspaces

Configure the following Team Development settings for new workspaces: Enable Issue File Repository, Maximum Issue File Size, Enable Feedback File Repository, and Maximum Feedback File Size.

These attributes only impact Team Development when creating new workspaces. These settings do not affect existing workspaces.

- 1. To configure Team Development settings for new workspaces:
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Feature Configuration.
- 4. Locate the **Team Development** section.
- 5. Configure the following:
 - a. Enable Issue File Repository Specify whether to enable file upload on the Issues page to the Team Development central file repository:
 - Yes Select Yes to enable file upload for Issues in Team Development.
 - No Select No to disable file upload for Issues in Team Development.
 - b. Maximum File Size (in MB) Select the maximum file size for any file uploaded for Issues in the Team Development file repository. The default value is 15 MB.
 - c. Enable Feedback File Repository Specify whether to enable file upload for User Feedback within Team Development:
 - **Yes** Select **Yes** to allow files to be uploaded into the Feedback repository in a new workspace.
 - No Select No to disable file upload into the Feedback repository in a new workspace.
 - d. Maximum Feedback File Size (in MB) Select the maximum file size for any file upload for User Feedback into the Feedback file repository. The default value is 15 MB.
- 6. Click Apply Changes.



- "Configuring Team Development in an Existing Workspace"
- Managing Team Development in Oracle Application Express App Builder User's Guide

3.5.2 Configuring Security

Instance administrators can configure instance security, including service-level security, configuring support for Real Application Security, configuring session time out, preventing browser attacks by isolating workspaces, excluding domains from



regions and Web services, configuring authentication controls, creating strong password policies, restricting access by Database Access Descriptor (DAD), and managing authorized URLs.

- Configuring Service-level Security Settings Instance administrators can configure service-level security in Manage Instance, Security, Security Settings, Security.
- Configuring HTTP Protocol Attributes Determine HTTPS requirements for an Oracle Application Express instance and all related applications.
- Enabling Real Application Security Enable Oracle Real Application Security.
- Configuring Session Timeout for an Instance Use the Session Timeout attributes for an instance to reduce exposure at the application-level for abandoned computers with an open web browser.
- Isolating All Workspaces in an Instance Instance administrators can prevent browser attacks by isolating a workspace.
- Defining Excluded Domains for Regions and Web Services Define a list of restricted domains for regions of type URL and Web services. If a Web service or region of type URL contains an excluded domain, an error displays informing the user that it is restricted.
- Configuring Authentication Controls for an Instance Configure authentication controls for an entire Oracle Application Express instance.
- Creating Strong Password Policies Instance administrators can create strong password policies for an Oracle Application Express instance.
- Restricting Access to Oracle Application Express by Database Access Descriptor (DAD)
 Restrict access to Oracle Application Express by Database Access Descriptor

Restrict access to Oracle Application Express by Database Access Descriptor (DAD).

Managing Authorized URLs
 Create and manage a list of authorized URLs.

3.5.2.1 Configuring Service-level Security Settings

Instance administrators can configure service-level security in Manage Instance, Security, Security Settings, Security.

Service-level security includes configuring login controls, controlling file upload capability, restricting access by IP address, configuring a proxy server for an instance, controlling support for URLs containing session IDs, and controlling how Oracle Application Express displays the results of unhandled errors.

- Controlling If Cookies Populate the Login Form Control if a convenience cookie is sent to a user's computer whenever a developer or administrator logs in to a workspace from the Application Express Login page.
- Disabling Access to Oracle Application Express Administration Services Prevent a user from logging in to Oracle Application Express Administration Services.



- Enabling Access to Oracle Application Express Administration Services If access to Oracle Application Express Administration Services has been disabled, an Instance administrator can re-enable again by running the following SQL statements.
- Disabling Workspace Login Access
 Restrict user access to Application Express by disabling workspace login.
 Disabling workspace login in production environments prevents users from running
 Application Express applications such as App Builder.
- Controlling Public File Upload Use the Allow Public File Upload attribute to control whether unauthenticated users can upload files in applications that provide file upload controls.
- Restricting User Access by IP Address
 Restrict user access to an Oracle Application Express instance by specifying a
 comma-delimited list of allowable IP addresses.
- Configuring a Proxy Server for an Instance Configure an entire Oracle Application Express instance to use a proxy for all outbound HTTP traffic.
- Selecting a Checksum Hash Function Select a hash function that Application Express uses to generate one way hash strings for checksums.
- Configuring Rejoin Sessions for an Instance Controls at the application-level if whether URLs in this application contain session IDs.
- Configuring Unhandled Errors
 Control how Oracle Application Express displays the results of unhandled errors

3.5.2.1.1 Controlling If Cookies Populate the Login Form

Control if a convenience cookie is sent to a user's computer whenever a developer or administrator logs in to a workspace from the Application Express Login page.

If Set Workspace Cookie option is set to **Yes**, Oracle Application Express sends a persistent cookie that:

- Combines the last used workspace name and user name
- Has a lifetime of six months
- Is read to populate the Application Express Workspace Login form (but not the Oracle Application Express Administration Services Login form)

To control if cookies populate the login form:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click **Security**.
- 4. Locate the Security section.
- 5. For Set Workspace Cookie, select No.
 - **Yes** Enables the Application Express workspace login page to send a persistent cookie containing the last used workspace name and username combination.



This cookie has a lifetime of six months and is used to populate the Workspace and Username fields of the Application Express workspace login form (not the Service Administration login form).

- **No** Prevents this cookie from being sent.
- 6. Click Apply Changes.

Note:

If your system has received this cookie, you can physically remove it from its persistent location on disk using browser tools or system utilities. The cookie is named ORA_WWV_REMEMBER_UN. In older releases of Oracle Application Express, this cookie was named ORACLE_PLATFORM_REMEMBER_UN. It may exist for each Oracle Application Express service accessed having distinct hostname and path components.

3.5.2.1.2 Disabling Access to Oracle Application Express Administration Services

Prevent a user from logging in to Oracle Application Express Administration Services.

Instance administrators can prevent a user from logging in to Oracle Application Express Administration Services. Disabling administrator login in production environments prevents unauthorized users from accessing Application Express Administration Services and possibly compromising other user login credentials.

To disable user access to Oracle Application Express Administration Services:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Security.
- 4. Locate the Security section.
- 5. For Disable Administrator Login, select Yes.

Note:

Selecting **Yes** and signing out prevents anyone from accessing Oracle Application Express Administration Services.

6. Click Apply Changes.



"Enabling Access to Oracle Application Express Administration Services"



3.5.2.1.3 Enabling Access to Oracle Application Express Administration Services

If access to Oracle Application Express Administration Services has been disabled, an Instance administrator can re-enable again by running the following SQL statements.

To enable user access to Oracle Application Express Administration Services if it has been disabled:

- 1. Connect in SQL*Plus and connect to the database where Oracle Application Express is installed as SYS, for example:
 - On Windows:

SYSTEM_DRIVE:\ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

On UNIX and Linux:

\$ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

2. Run the following statement:

ALTER SESSION SET CURRENT_SCHEMA = APEX_190200;

3. Run the following statement:

```
BEGIN
APEX_INSTANCE_ADMIN.SET_PARAMETER('DISABLE_ADMIN_LOGIN', 'N');
commit;
END;
/
```

3.5.2.1.4 Disabling Workspace Login Access

Restrict user access to Application Express by disabling workspace login. Disabling workspace login in production environments prevents users from running Application Express applications such as App Builder.

To disable user access to the Internal workspace:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Security.
- 4. Locate the Security section.
- 5. From Disable Workspace Login, select Yes.

Selecting **Yes** effectively sets a Runtime-Only environment while still allowing Instance administrators to sign in to Instance Administration. Selecting **Yes** in production environments prevents developers from changing applications or data.

6. Click Apply Changes.



3.5.2.1.5 Controlling Public File Upload

Use the Allow Public File Upload attribute to control whether unauthenticated users can upload files in applications that provide file upload controls.

To control file upload:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Security.
- 4. Locate the Security section.
- 5. From Allow Public File Upload, select one of the following:
 - **Yes** Enables unauthenticated users to upload files in applications that provide file upload controls.
 - No Prevents unauthenticated users from uploading files in applications that provide file upload controls.
- 6. Click Apply Changes.

3.5.2.1.6 Restricting User Access by IP Address

Restrict user access to an Oracle Application Express instance by specifying a comma-delimited list of allowable IP addresses.

To restrict user access by IP address:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Security.
- 4. Locate the Security section.
- 5. For Disable Administrator Login, select No.
- 6. In Restrict Access by IP Address, enter a comma-delimited list of allowable IP addresses. Use an asterisk (*) to specify a wildcard.

You can enter IP addresses from one to four levels. For example:

```
141, 141.* ...
192.128.23.1 ...
```

Note:

When using wildcards, do not include additional numeric values after wildcard characters. For example, 138.*.41.2.

7. Click Apply Changes.



3.5.2.1.7 Configuring a Proxy Server for an Instance

Configure an entire Oracle Application Express instance to use a proxy for all outbound HTTP traffic.

Setting a proxy at the instance-level supersedes any proxies defined at the application-level or in web service references. If a proxy is specified, regions of type URL, Web services, and report printing will use the proxy.

To configure a proxy for an Oracle Application Express instance:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click **Security**.
- 4. Locate the Security section.
- 5. In Instance Proxy, enter the address and port of the proxy to be used for the entire instance. In No Proxy Domains, enter a list of domains, for which the proxy server should not be used.
- 6. Click Apply Changes.

3.5.2.1.8 Selecting a Checksum Hash Function

Select a hash function that Application Express uses to generate one way hash strings for checksums.

The Checksum Hash Function attribute enables you to react to recent developments and switch between algorithms based on new research. Use the Checksum Hash Function attribute to select a hash function that Oracle Application Express uses to generate one way hash strings for checksums. This attribute is also the default value for the Security Bookmark Hash Function attribute in new applications. Applications use the Bookmark Hash Function when defining bookmark URLs.

🔷 Tip:

Changing the Checksum Hash Function does not change the Bookmark Hash Function currently defined for existing applications because this would invalidate all existing bookmarks saved by end users. Oracle strongly recommends going into existing applications, expiring existing bookmarks, and then updating the Bookmark Hash Function to the same value defined for Checksum Hash Function.

To select a checksum hash function:

- **1.** Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click **Security**.
- 4. Locate the Security section.
- 5. From Checksum Hash Function, select a hash function that Application Express uses to generate one way hash strings for checksums.



The **SHA-2** algorithms are only supported on Oracle Database 12*c* or later. **Most Secure** automatically selects the most secure algorithm available. Therefore, Oracle recommends this setting. On Oracle Database 12*c* or later, this evaluates to **SHA-2**, **512 bit** and on Oracle Database 11*g*, **SHA-1** is the most secure algorithm. Since the **MD5** algorithm is deprecated, Oracle does not recommend this setting.

6. Click Apply Changes.

3.5.2.1.9 Configuring Rejoin Sessions for an Instance

Controls at the application-level if whether URLs in this application contain session IDs.

By configuring the Rejoin Sessions attribute, Instance administrators can control if Oracle Application Express supports URLs that contain session IDs. When Rejoin Sessions is enabled, Oracle Application Express attempts to use the session cookie to join an existing session, when a URL does not contain a session ID.

To use Rejoin Sessions at the application or page-level, an administrator must enable **Rejoin Sessions** at the instance-level. A more restrictive instance-level setting overrides application and page settings.

🖋 Warning:

For security reasons, Oracles recommends that administrators disable support for session joining unless they implement workspace isolation by configuring the Allow Hostname attributes. See "Isolating a Workspace to Prevent Browser Attacks" and "Isolating All Workspaces in an Instance."

Note:

Enabling rejoin sessions may expose your application to possible security breaches by enabling attackers to take over existing end user sessions. To learn more, see "About Rejoin Sessions" in *Oracle Application Express App Builder User's Guide*.

To configure Rejoin Sessions:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Security.
- 4. Locate the Security section.
- 5. From Rejoin Sessions, select an option:
 - **Disabled** If the URL does not contain a session ID, Oracle Application Express creates a new session.
 - **Enabled for Public Sessions** If the URL goes to a public page and does not contain a session ID Application Express attempts to utilize the existing



session cookie established for that application. For applications with both public and authenticated pages, a session ID is defined after the end user authenticates. Application Express only joins via the cookie when the session is not yet authenticated.

- **Enabled for All Sessions** If the URL does not contain a session ID, Oracle Application Express attempts to use the existing session cookie established for that application, providing one of the following conditions are met:
 - Session State Protection is enabled for the application and the URL includes a valid checksum. For public bookmarks, the most restrictive item level protection must be either Unrestricted or Checksum Required -Application Level.
 - The URL does not contain payload (a request parameter, clear cache or data value pairs). This setting requires that Embed In Frames is set to Allow from same origin or to Deny for the application.

Enabled for All Sessions requires that **Embed in Frames** is set to **Allow from same origin** or **Deny**. This is not tied to a condition about the URL payload, but also applies to session state protected URLs.

6. Click Apply Changes.

See Also:

- "Configuring Rejoin Sessions for a Page" in Oracle Application Express App Builder User's Guide
- "Session Management" in *Oracle Application Express App Builder User's Guide* to learn how to configure Rejoin Sessions at the application-level

3.5.2.1.10 Configuring Unhandled Errors

Control how Oracle Application Express displays the results of unhandled errors

When Oracle Application Express encounters an unhandled error during processing, an error page displays to the end user of the application. From a security standpoint, it is often better to not display these messages and error codes to the end user and simply return a HTTP 400 (Bad Request) error code to the client browser.

To configure Unhandled Errors:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click **Security**.
- 4. Locate the Security section.
- 5. From Unhandled Errors, select an option:
 - **Show Error Page** This is the default behavior. For any error or exception which is not handled by the error processing of an application, an error page displays to the end user with the specific error and the error code.



- **Return HTTP 400** Returns an HTTP 400 status to the end user's client browser when the Application Express engine encounters an unhandled error.
- 6. Click Apply Changes.

3.5.2.2 Configuring HTTP Protocol Attributes

Determine HTTPS requirements for an Oracle Application Express instance and all related applications.

Note:

Require HTTPS make Oracle Application Express unreachable by the HTTP protocol. Before enabling this setting, ensure that the HTTPS protocol is enabled and configured correctly on your server.

About SSL

Secure Sockets Layer (SSL) is a protocol for managing the security of data transmitted on the Internet. For web applications, SSL is implemented by using the HTTPS protocol. Oracle recommends running Oracle Application Express applications using SSL (HTTPS protocol) to prevent any sensitive data from being sent over an unencrypted (cleartext) communication channel.

Requiring HTTPS

Configure both the Oracle Application Express instance and all related applications to require HTTPS by configuring the Require HTTPS and Require Outbound HTTPS attributes.

- Reversing Require HTTPS If you enable Reverse HTTPS, an Instance administrator can disable it by running the following SQL statements.
- Reversing Require Outbound HTTPS If you enable Require Outbound HTTPS, an Instance administrator can disable it by running the following SQL statements.
- Configuring Additional Response Headers Enter additional HTTP response headers that Oracle Application Express should send on each request, for all applications.


3.5.2.2.1 About SSL

Secure Sockets Layer (SSL) is a protocol for managing the security of data transmitted on the Internet. For web applications, SSL is implemented by using the HTTPS protocol. Oracle recommends running Oracle Application Express applications using SSL (HTTPS protocol) to prevent any sensitive data from being sent over an unencrypted (cleartext) communication channel.



3.5.2.2.2 Requiring HTTPS

Configure both the Oracle Application Express instance and all related applications to require HTTPS by configuring the Require HTTPS and Require Outbound HTTPS attributes.

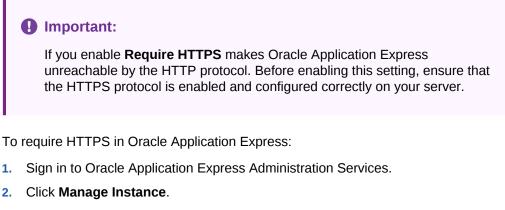

- 3. Under Instance Settings, click Security.
- 4. Under HTTP Protocol, configure the following:
 - a. Require HTTPS:
 - Always Enforces HTTPS for all applications (including the Oracle Application Express development and administration applications) to require HTTPS.

If set to **Always**, the Strict-Transport-Security Max Age attribute displays. Use this field to specify the time period in seconds during which the browser shall access the server with HTTPS only. To learn more, see field-level Help.

- **Development and Administration** Forces all internal applications within Oracle Application Express (that is, App Builder, SQL Workshop, Instance Administration and so on) to require HTTPS.
- **Application specific** Makes HTTPS dependent on application-level settings.
- **b.** Require Outbound HTTPS Select **Yes** to require all outbound traffic from an Application Express instance to use the HTTPS protocol.
- c. HTTP Response Headers Enter additional HTTP response headers that Oracle Application Express should send on each request for all applications. Developers can specify additional headers at application-level. Each header has to start on a new line. Note that support for various headers differs between browsers. To learn more, see field-level Help.
- 5. Click Apply Changes.

3.5.2.2.3 Reversing Require HTTPS

If you enable Reverse HTTPS, an Instance administrator can disable it by running the following SQL statements.

To reverse Require HTTPS:



- 1. Connect in SQL*Plus or SQL Developer with the Application Express engine schema as the current schema, for example:
 - On Windows:

SYSTEM_DRIVE:\ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

On UNIX and Linux:

\$ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

2. Run the following statement:

ALTER SESSION SET CURRENT_SCHEMA = APEX_190200;

3. Run the following statement:

```
BEGIN
    APEX_INSTANCE_ADMIN.SET_PARAMETER('REQUIRE_HTTPS', 'N');
    commit;
end;
/
```

3.5.2.2.4 Reversing Require Outbound HTTPS

If you enable Require Outbound HTTPS, an Instance administrator can disable it by running the following SQL statements.

To reverse Require Outbound HTTPS:

- 1. Connect in SQL*Plus or SQL Developer with the Application Express engine schema as the current schema, for example:
 - On Windows:

SYSTEM_DRIVE:\ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

On UNIX and Linux:

\$ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

2. Run the following statement:

ALTER SESSION SET CURRENT_SCHEMA = APEX_190200;

3. Run the following statement:

```
BEGIN
    APEX_INSTANCE_ADMIN.SET_PARAMETER('REQUIRE_OUT_HTTPS', 'N');
    commit;
end;
/
```



3.5.2.2.5 Configuring Additional Response Headers

Enter additional HTTP response headers that Oracle Application Express should send on each request, for all applications.

To configure additional response headers:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click **Security**.
- 4. Locate HTTP Protocol.
- 5. In HTTP Response Headers, enter additional HTTP response headers that Oracle Application Express should send on each request for all applications.

Developers can specify additional headers at application-level. Each header has to start on a new line. Support for various headers differs between browsers.

One important security related header is Content-Security-Policy. Sending this header can significantly reduce the risk of cross site scripting (XSS) and related attacks. To learn more, see field-level Help.

6. Click Apply Changes.

3.5.2.3 Enabling Real Application Security

Enable Oracle Real Application Security.

To enable Real Application Security:

If you are running Oracle Database 12c Release 1 (12.1.0.2) or later, you can enable Oracle Real Application Security. Oracle Real Application Security (RAS) is a database authorization framework that enables application developers and administrators to define, provision, and enforce application-level security policies at the database layer.

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Security.
- 4. Locate Real Application Security.
- 5. For Allow Real Application Security.
 - Yes Enables Oracle Database Real Application Security support for applications. If Real Application Security is configured in an application's authentication scheme, Oracle Application Express creates a Real Application Security session for a new Oracle Application Express session and automatically attaches to it.
 - **No** Disables Oracle Database Real Application Security.
- 6. Click Apply Changes.



💉 See Also:

Oracle Database Real Application Security Administrator's and Developer's Guide

3.5.2.4 Configuring Session Timeout for an Instance

Use the Session Timeout attributes for an instance to reduce exposure at the application-level for abandoned computers with an open web browser.

Instance administrators can Session Timeout for an instance on the Instance Settings, Security page.

- **1**. To configure Session Timeout attributes for an instance:
- **1.** Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Security.
- 4. Under Session Timeout:
 - a. Maximum Session Length in Seconds Defines how long (in seconds) sessions can exist and be used by applications in this Application Express instance. This setting is superseded by the corresponding workspace-level setting and application-level setting.
 - Enter a positive integer to control how long a session can exist.
 - Enter 0 to have the session exist indefinitely.
 - Leave the value empty in order to revert to the default value of 8 hours (28800 seconds).
 - **b.** Maximum Session Idle Time in Seconds Session Idle Time is the time between the last page request and the next page request. This setting is superseded by the corresponding workspace-level setting and application-level setting.
 - Enter a positive integer to control the default idle time for sessions used by applications in this Application Express instance.
 - Leave the value empty in order to revert to the default value of 1 hour (3600 seconds).
 - c. Session Timeout Warning in Seconds The session timeout warning time defines (in seconds) how long before a session times out (either maximum session length, or maximum session idle time), to warn the user. For the maximum session idle time warning, the user will have the opportunity to extend the session. For maximum session length warning, the user will be prompted to save any work, to avoid loss of data when the session maximum time is reached. This setting is superseded by the corresponding workspace-level setting and application-level setting.
 - Enter a positive integer to control the warning time for sessions used by applications in this Application Express instance.
 - Enter 0 to switch off session timeout warnings.



- Leave the value empty in order to revert to the default value of 5 minutes (300 seconds).
- 5. Click Apply Changes.

See Also:
 "Configuring Session Timeout for a Workspace"
 "About Utilizing Session Timeout" and "Session Management" in Oracle Application Express App Builder User's Guide

3.5.2.5 Isolating All Workspaces in an Instance

Instance administrators can prevent browser attacks by isolating a workspace.

- About Isolating Workspaces to Prevent Browser Attacks Isolating workspaces is an effective approach to preventing browser attacks.
- Configuring Instance-Level Workspace Isolation Attributes Configure isolation and resource limitation default values for all workspaces. Workspace administrators can override these default values at the workspacelevel.

3.5.2.5.1 About Isolating Workspaces to Prevent Browser Attacks

Isolating workspaces is an effective approach to preventing browser attacks.

The only way to truly isolate a workspace is to enforce different domains in the URL by configuring the Allow Hostnames attribute. When the URLs of the attacker and the victim have different domains and hostnames, the browser's same-origin policy prevents attacks.

See Also:

"Isolating a Workspace to Prevent Browser Attacks" and Oracle Application Express App Builder User's Guide

3.5.2.5.2 Configuring Instance-Level Workspace Isolation Attributes

Configure isolation and resource limitation default values for all workspaces. Workspace administrators can override these default values at the workspace-level.

To configure instance-level Workspace Isolation attributes:

- **1.** Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Security.
- 4. Under Workspace Isolation, configure the following attributes:



Tip:

To learn more about an attribute, see field-level Help.

Table 3-1	Workspace	Isolation	Attributes
-----------	-----------	-----------	------------

Attribute	Description
Allow Hostnames	Enter a comma separated list of hostnames that can be used to access this instance. This attribute can be used to specify which DNS aliases of the web server can be used with applications. You can configure specific values that override this one at workspace level. If you enter one or more hostnames, the incoming HTTP request URL's hostname part must match one of the listed hostnames.
Resource Consumer Group	Specify the Database Resource Manager consumer group to be used for all page events on the instance. You can configure specific values that override this one at the workspace-level. At the beginning of every request, the Application Express engine switches the current consumer group of the current database session to the consumer group that is defined at workspace or instance level. This applies to both executing applications and any of the applications used within the Application Express development environment.
	The privilege to switch to this consumer group must be granted to either PUBLIC or the Application Express schema. This privilege is typically granted using the procedure DBMS_RESOURCE_MANAGER_PRIVS.GRANT_SWITCH_CONSU MER_GROUP.
Maximum Concurrent Workspace Requests	Enter the maximum number of concurrent page events that Oracle Application Express supports for all applications. You can configure a specific value at the workspace-level. Instead of processing a page event, Oracle Application Express shows an error message when the limit is already reached.
	Oracle Application Express keeps track of workspace requests by querying the CLIENT_INFO column of GV\$SESSION. This tracking will not work if developers overwrite CLIENT_INFO, for example, with a call to DBMS_APPLICATION_INFO.SET_CLIENT_INFO.



Attribute	Description	
Maximum Concurrent Session Requests	Enter the maximum number of concurrent page events that Oracle Application Express supports for each session for applications in this instance. You can configure a specific value at the workspace-level. Instead of processing a new page event, Oracle Application Express shows an error message when the limit is already reached. Alternatively, you can use the Concurrent Session Requests Kill Timeout attribute to kill an active database session, to process the new page event.	
	Oracle Application Express keeps track of session requests by querying the CLIENT_IDENTIFIER column of GV\$SESSION. This tracking will not work if developers overwrite CLIENT_IDENTIFIER, for example, with a call to DBMS_SESSION.SET_IDENTIFIER.	
Concurrent Session Requests Kill Timeout	If a new page event comes in that is outside the limits of Maximum Concurrent Session Requests, Oracle Application Express can execute alter system kill session on the oldest active database session which processes another page event for this Application Express session. The Concurrent Session Requests Kill Timeout attribute specifies the number of seconds a database process has to be active, before it can be killed. If you leave this attribute empty, Application Express will not kill any database sessions.	
	Warning : Killing sessions can cause problems with the application server's database session pool.	
Maximum Size of Files in Workspace	Enter the total size (in bytes) of all files that can be uploaded to a workspace. You can configure a specific value at the workspace-level.	
Maximum Web Service Requests	Enter the maximum number of web service requests that Application Express supports for each workspace in this instance. You can configure a more specific value at the workspace-level.	

Table 3-1 (Cont.) Workspace Isolation Attributes

5. Click Apply Changes.

3.5.2.6 Defining Excluded Domains for Regions and Web Services

Define a list of restricted domains for regions of type URL and Web services. If a Web service or region of type URL contains an excluded domain, an error displays informing the user that it is restricted.

To define a list of excluded domain from regions of type URL and Web services:

- **1**. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Security.
- 4. Under Domain Must Not Contain, enter a colon-delimited list of excluded domains, for example:

mycompany.com:yourcompany.com:abccompany.com



5. Click Apply Changes.

3.5.2.7 Configuring Authentication Controls for an Instance

Configure authentication controls for an entire Oracle Application Express instance.

- About Authentication Controls
 Administrators can configure authentication controls for an entire instance or for each individual workspace.
- Configuring Security for Developer and End User Login Configure developer and end user login security settings.
- Configuring Security Settings for Workspace Administrator and Developer Accounts Manage security settings for workspace administrator and workspace developer accounts.
- Editing Development Environment Authentication Scheme Manage development environment authentication schemes.

See Also:

"Managing Workspace Account Login Controls"

3.5.2.7.1 About Authentication Controls

Administrators can configure authentication controls for an entire instance or for each individual workspace.

For example, if an instance administrator configures authentication controls in Oracle Application Express Administration Services that configuration applies to all Application Express accounts in all workspaces across an entire development instance.

If the instance administrator does *not* enable authentication controls across an entire instance, then each Workspace administrator can enable the following controls on a workspace-by-workspace basis:

- User account expiration and locking
- A maximum number of failed login attempts for user accounts
- Account password lifetime (or number of days an end-user account password can be used before it expires for end-user accounts)

Tip:

This feature applies only to accounts created using the Application Express user creation and management. It provides additional authentication security for applications. See "Managing Users in a Workspace."



See Also:

- "Managing Workspace Account Login Controls"
- "Configuring Security for Developer and End User Login"
- "Configuring Security Settings for Workspace Administrator and Developer Accounts"

3.5.2.7.2 Configuring Security for Developer and End User Login

Configure developer and end user login security settings.

To configure security settings for developer and end user login:

- **1**. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Security.
- 4. Under General Settings, configure the following attributes:
 - a. Delay after failed login attempts in Seconds After failed logins, Oracle Application Express displays a countdown of this number times the number of failed login attempts, before it accepts new login attempts with the same username. Enter 0 to disable the countdown and allow immediate access.
 - b. Method for computing the Delay Select a method for computing the delay for failed log ins. The computation methods are based on recent data in the Login Access Log.

See item help for further details.

- c. Inbound Proxy Servers Enter a comma-separated list of IP addresses for well known proxy servers, through which requests come in. Oracle Application Express uses this list to compute the actual client address from the HTTP Headers X-Forwarded-For and REMOTE_ADDR.
- d. Single Sign-On Logout URL Enter the URL Application Express redirects to trigger a logout from the Single Sign-On server. Application Express automatically appends ?p_done_url=...login url....
- 5. Click Apply Changes.

3.5.2.7.3 Configuring Security Settings for Workspace Administrator and Developer Accounts

Manage security settings for workspace administrator and workspace developer accounts.

To configure security controls for workspace administrator and workspace developer accounts:

- **1**. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click **Security**.



- 4. Under Development Environment Settings,, configure the following attributes:
 - a. Username Validation Expression Enter a regular expression to validate the usernames of developers and administrators. Enter * to bypass the validation. The following example validates that the username is an email address:

^[[:alnum:]._%-]+@[[:alnum:].-]+\.[[:alpha:]]{2,4}\$

- b. Require User Account Expiration and Locking Applies to end user accounts created using the Oracle Application Express account management interface. Select Yes to enable Application Express user account expiration and locking features across all workspaces. This selection prevents the same feature from being disabled at the workspace-level. Select No to relinquish control to each Workspace administrator.
- c. Maximum Login Failures Allowed Enter an integer for the maximum number of consecutive unsuccessful authentication attempts allowed before a developer or administrator account is locked. If you do not specify a value in this field, the default value is 4.

This setting applies to administrator and developer accounts. It does not apply to end user accounts. The value you enter is used as the default for the workspace-level **Maximum Login Failures Allowed** preference if the Workspace administrator does not specify a value. That preference is used for end-user accounts within the respective workspace.

d. Account Password Lifetime (days) - Enter a number for the maximum number of days a developer or administrator account password may be used before the account expires. If you do not specify a value in this field, a default value is 45 days.

This setting applies to accounts used to access the Application Express administration and development environment only. It does not apply to end user accounts. The value you enter is used as the default workspace-level **End User Account Lifetime** preference which workspace administrators can change. The workspace-level preference applies to the accounts within that workspace.

5. Click Apply Changes.

3.5.2.7.4 Editing Development Environment Authentication Scheme

Manage development environment authentication schemes.

To edit development environment authentication schemes:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- **3.** Under Instance Settings, click **Security**.
- 4. Scroll down to Development Environment Authentication Schemes.
- 5. Click the Edit icon adjacent to the authentication scheme you wish to edit.
- 6. Edit the appropriate attributes. To make the selected authentication scheme current, click **Make Current Scheme**.

To learn more about an attribute, see field-level Help.

7. To save you changes, click Apply Changes.



Tip:

You can also change the authentication scheme using the APEX_BUILDER_AUTHENTICATION parameter in APEX_INSTANCE_ADMIN package. See "Available Parameter Values" in *Oracle Application Express API Reference*.

3.5.2.8 Creating Strong Password Policies

Instance administrators can create strong password policies for an Oracle Application Express instance.

- About Strong Password Policies
 Manage password policy for Application Express users (workspace administrators, developers, and end users) in all workspaces.
- Configuring Password Policies Manage password policy for Application Express users (workspace administrators, developers, and end users) in all workspaces.

3.5.2.8.1 About Strong Password Policies

Manage password policy for Application Express users (workspace administrators, developers, and end users) in all workspaces.

Password policies can:

- Apply to all users (including, Workspace administrators, developers, and end users) in an Oracle Application Express instance.
- Include restrictions on characters, password length, specific words, and differences in consecutive passwords.
- Apply to users signing in to Oracle Application Express Administration Services.

The Application Express instance administrator can select the password policy for service administrators. Options include:

- Use policy specified in Workspace Password Policy Applies the password rules specified the in Workspace Password Policy.
- Use default strong password policy Adds another layer of security to prevent hackers from determining an administrator's password. This password policy requires that service administrator passwords meet these restrictions:
 - Consist of at least six characters.
 - Contain at least one lowercase alphabetic character, one uppercase alphabetic character, one numeric digit, and one punctuation character.
 - Cannot include the username.
 - Cannot include the word Internal.
 - Cannot contain any words shown in the Must Not Contain Workspace Name field in this section.

Password policies add another layer of security to prevent hackers from determining an administrator's password.



3.5.2.8.2 Configuring Password Policies

Manage password policy for Application Express users (workspace administrators, developers, and end users) in all workspaces.

To configure password policies:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Security.
- 4. Under Password Policy and specify the following attributes:

 Table 3-2
 Workspace Password Policy Attributes

Attribute	Description
Password Hash Function	Select a hash function that Application Express uses to generate one way hash strings for workspace user passwords. To learn, see field-level Help.
Minimum Password Length	Enter a number to set a minimum character length for passwords for workspace administrator, developer, and end user accounts.
Minimum Password Differences	Enter the number of differences required between old and new passwords. The passwords are compared character by character, and each difference that occurs in any position counts toward the required minimum difference. This setting applies to accounts for workspace administrators,
	developers, and end users.
Must Contain At Least One Alphabetic Character	Select Yes to require that workspace administrator, developer, and end user account passwords contain at least one alphabetic character as specified in the Alphabetic Characters field.
Must Contain At Least One Numeric Character	Select Yes to require that workspace administrator, developer, and end user account passwords contain at least one Arabic numeric character (for example, 0,1,2,3,4,5,6,7,8,9).
Must Contain At Least One Punctuation Character	Select Yes to require that workspace administrator, developer, and end user account passwords contain at least one punctuation character as specified in the Punctuation Characters field.
Must Contain At Least One Upper Case Character	Select Yes to require that workspace administrator, developer, and end user account passwords contain at least one uppercase alphabetic character.
Must Contain At Least One Lower Case Character	Select Yes to require that workspace administrator, developer, and end user account passwords contain at least one lowercase alphabetic character.
Must Not Contain Username	Select Yes to prevent workspace administrator, developer, and end user account passwords from containing the username.



Attribute	Description
Must Not Contain Workspace Name	Select Yes to prevent workspace administrator, developer, and end user account passwords from containing the workspace name, regardless of case.
Must Not Contain	Enter words, separated by colons, that workspace administrator, developer, and end user account passwords must not contain. These words may not appear in the password in any combination of uppercase or lowercase.
	This feature improves security by preventing the creation of simple, easy-to-guess passwords based on words like <i>hello</i> , <i>guest, welcome</i> , and so on.
Alphabetic Characters	Enter new or edit the existing alphabetic characters. This is the set of characters used in password validations involving alphabetic characters.
Punctuation Characters	Enter new or edit existing punctuation characters. This set of characters must be used in password validations involving punctuation characters.

Table 3-2 (Cont.) Workspace Password Policy Attributes

- 5. For Service Administrator Password Policy, select an option:
 - Use policy specified in Workspace Password Policy Applies the password rules specified above in Workspace Password Policy to service administrator passwords.
 - Use default strong password policy Requires that service administrator passwords meet these restrictions:
 - Consist of at least six characters
 - Contain at least one lowercase alphabetic character, one uppercase alphabetic character, one numeric digit, and one punctuation character
 - Cannot include the username
 - Cannot include the word Internal
 - Cannot contain any words shown in the Must Not Contain field specified above in Workspace Password P
- 6. Click Apply Changes.

3.5.2.9 Restricting Access to Oracle Application Express by Database Access Descriptor (DAD)

Restrict access to Oracle Application Express by Database Access Descriptor (DAD).

🚫 Tip:

The PL/SQL Request Validation Function directive is only available in Oracle Application Server 10g and Oracle HTTP Server 11g or later, and the embedded PL/SQL gateway in Oracle Database 11g or later. This directive is not available in Oracle HTTP Server Release 9.0.3.



- About Enforcing Access Restrictions Per DAD You can restrict access to Oracle Application Express by DAD by creating a request validation function directive when you create the DAD.
- About Changing and Recompiling wwv_flow_epg_include_local You can change and recompile the wwv_flow_epg_include_local function to restrict access.
- Specifying Allowed Named Procedures
- Altering the Product Schema You can restrict access by altering the product schema.

3.5.2.9.1 About Enforcing Access Restrictions Per DAD

You can restrict access to Oracle Application Express by DAD by creating a request validation function directive when you create the DAD.

mod_plsql and the embedded PL/SQL gateway support a directive which enables you to name a PL/SQL function which is called for each HTTP request. You can use this functionality to restrict the procedures that can be called through the embedded PL/SQL gateway or mod_plsql. The function returns TRUE if the named procedure in the current request is allowed and FALSE if it is not allowed. You can also use this function to enforce access restrictions for Oracle Application Express on a per-Database Access Descriptor (DAD) basis.

During installation, the installer also creates a PL/SQL function in the Oracle Application Express product schema (APEX_190200). To restrict access, you can change and recompile this function. The source code for this function is not wrapped and can be found in the Oracle Application Express product core directory in the file named wwv_flow_epg_include_local.sql.

Oracle Application Express ships with a request validation function named wwv_flow_epg_include_modules.authorize. This function specifies access restrictions appropriate for the standard DAD configured for Oracle Application Express.

The wwv_flow_epg_include_mod_local function is called by Oracle Application Express's request validation function which itself is called by the embedded PL/SQL gateway or mod_plsql. The Oracle Application Express function first evaluates the request and based on the procedure name, approves it, rejects it, or passes it to the local function, wwv_flow_epg_include_mod_local, which can evaluate the request using its own rules.

When you create new DADs for use with Oracle Application Express, the request validation function directive should be specified. Specifically, the function wwv_flow_epg_include_modules.authorize should be named in the directive
PlsqlRequestValidationFunction in the Database Access Descriptor entry in
dads.conf.

If you have no additional restrictions beyond those implemented in the wwv_flow_epg_include_modules.authorize function, there is no need to take any action with respect to the source code for the wwv_flow_epg_include_mod_local function.



3.5.2.9.2 About Changing and Recompiling wwv_flow_epg_include_local

You can change and recompile the wwv_flow_epg_include_local function to restrict access.

The source code for the wwv_flow_epg_include_local function is not wrapped and can be found in the Oracle Application Express product core directory in the file named wwv_flow_epg_include_local.sql. The source code is as follows:

```
CREATE OR REPLACE FUNCTION

wwv_flow_epg_include_mod_local(

    PROCEDURE_NAME IN VARCHAR2)

RETURN BOOLEAN

IS

BEGIN

    RETURN FALSE; -- remove this statement when

you add procedure names to the "IN" list

    IF UPPER(procedure_name) IN (

        '') THEN

    RETURN TRUE;

ELSE

    RETURN FALSE;

END IF;

END Wwv_flow_epg_include_mod_local;

/
```

3.5.2.9.3 Specifying Allowed Named Procedures

You can restrict access by specifying the names of procedures that should be allowed in wwv_flow_epg_include_local.

To specify names of procedures that should be allowed, edit wwv_flow_epg_include_localas follows:

1. Remove or comment out the RETURN FALSE statement that immediately follows the BEGIN statement:

```
...
BEGIN
RETURN FALSE; -- remove this statement when
you add procedure names to the "IN" list
...
```

2. Add names to the clause representing procedure names that should be allowed to be invoked in HTTP requests. For example to allow procedures PROC1 and PROC2 the IN list you would write IN ('PROC1', 'PROC2').

After changing the source code of this function, alter the Oracle Application Express product schema (APEX_190200) and compile the function in that schema.

3.5.2.9.4 Altering the Product Schema

You can restrict access by altering the product schema.

To alter the product schema, APEX_190200:

1. Start SQL*Plus and connect to the database where Oracle Application Express is installed as SYS. For example:



On Windows:

SYSTEM_DRIVE:\ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

• On UNIX and Linux:

\$ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

2. Alter the product schema (APEX_190200) by entering the following command:

ALTER SESSION SET CURRENT_SCHEMA APEX_190200;

3. Compile the function wwv_flow_epg_include_local.sql.

3.5.2.10 Managing Authorized URLs

Create and manage a list of authorized URLs.

Authorized URLs identify the list of URLs that can be used as parameter values of certain Oracle Application Express procedures. This includes the APEX_UTIL.COUNT_CLICK procedure, which has an input parameter named P_NEXT_URL.

If the parameter value to P_NEXT_URL is not a relative URL and not to the current host name, then it must be contained in this list of Authorized URLs.

- Defining a List of Authorized URLs Define a list of authorized URLs.
- Editing a Defined Authorized URL Edit a URL included in the list of authorized URLs.
- Deleting Defined Authorized URL Delete a URL included in the list of authorized URLs.

3.5.2.10.1 Defining a List of Authorized URLs

Define a list of authorized URLs.

To define a list of Authorized URLs:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Security.
- 4. Click the Authorized URLs tab.
- 5. Click Create Authorized URL.
- 6. In Authorized URL, identify an authorized URL that can be used as the parameter value to certain Application Express procedures, including APEX_UTIL.COUNT_CLICK.

The entire Authorized URL value will be compared with the URL parameter value in these procedures. If there is an exact match up to and including the entire length of the Authorized URL value, then the URL parameter value will be permitted.



7. Enter Create Authorized URL.

3.5.2.10.2 Editing a Defined Authorized URL

Edit a URL included in the list of authorized URLs.

To edit an existing URL:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Security.
- 4. Click the Authorized URLs tab.
- 5. Click the Edit icon adjacent to the URL.
- 6. Edit the Authorized URL and Description fields.
- 7. Click Apply Changes.

3.5.2.10.3 Deleting Defined Authorized URL

Delete a URL included in the list of authorized URLs.

To delete a URL included in the list of authorized URLs:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Security.
- 4. Click the Authorized URLs tab.
- 5. Click the Edit icon adjacent to the URL.
- 6. Click Delete.
- 7. Click **OK** to confirm your selection.

3.5.3 Configuring Instance Settings

Control a variety of general settings for an Oracle Application Express development instance including configuring workspace provisioning behavior, storage, email, wallet information, report printing, Help menu, workspace size options, and application ID ranges.

About Configuring Workspace Provisioning

The Instance administrator determines the amount of automation when provisioning (or creating) a workspace.

 Disabling Email Provisioning Use Email Provisioning in conjunction with the Provisioning Method, Automatic, to disable workspace provisioning and send users a message.

Configuring Storage

Instance administrators can configure the following Storage options: require a new schema when requesting a workspace, auto extend tablespaces, automaticaly approve storage requests, or delete uploaded files in a specified number of days.



Configuring Email

To enable Oracle Application Express to send mail, an instance administrator must configure instance-level email settings.

- Configuring Wallet Information Configure wallet information (which store authentication and signing credentials) for an Oracle Application Express instance.
- Configuring Report Printing Enable end users to download and print reports in various formats, including PDF.
- Configuring the Help Menu Configure the target URL of the Help menu that displays in the upper right corner of the Oracle Application Express development environment.
- Configuring Workspace Size Requests
 Configure the size options available to users when they request a new workspace and schema or request additional storage for an existing workspace.
- Managing Application ID Range Control the range for IDs of new database applications and Websheet applications.

See Also:

"Creating Workspaces in Administration Services"

3.5.3.1 About Configuring Workspace Provisioning

The Instance administrator determines the amount of automation when provisioning (or creating) a workspace.

To determine how provisioning works, an Instance Administrator selects one of the following Provisioning Methods on the Instance Settings page:

- **Manual** An Instance administrator creates new workspaces and notifies the Workspace administrator regarding the Sign In credentials.
- **Request** Users request a workspace. Once an administrator approves the request, the user receives an email containing an email verification link. After the user clicks the email verification link, the workspace is created.
- Automatic Works similar to Request except requests are automatically approved with no administrator review required.

To enable users to request a workspace using a link on the Sign In page, the Instance administrator must choose either the **Request** or **Automatic** Provisioning Method. If the Provisioning Method is set to **Manual**, no link appears on the Sign In page.

Note:

An instance administrator must configure instance-level email in order for Oracle Application Express to send the emails required for the **Request** or **Automatic** Provisioning Methods.

ORACLE

See Also:

- "Selecting a Workspace Provisioning Mode"
- "Configuring Email"
- "Disabling Email Provisioning"
- "Managing Requests"

3.5.3.2 Disabling Email Provisioning


Use Email Provisioning in conjunction with the Provisioning Method, Automatic, to disable workspace provisioning and send users a message.

Selecting **Disabled for Email Provisioning** enables you to display message to users that explains why workspace provisioning is disabled.

- 1. To disable email provisioning:
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Instance Settings.
- 4. From Email Provisioning, select Disabled.

Selecting **Disabled** completely disables workspace provisioning.

- 5. In Message, enter a message that explains why email provisioning is disabled.
- 6. Click Apply Changes.



"Selecting a Workspace Provisioning Mode"

3.5.3.3 Configuring Storage

Instance administrators can configure the following Storage options: require a new schema when requesting a workspace, auto extend tablespaces, automaticaly approve storage requests, or delete uploaded files in a specified number of days.

- Requiring a New Schema Control if a user requesting a workspace can select an existing schema or must request a new schema.
- Enabling Auto Extend Tablespaces Enable Auto Extend Tablespaces.
- Enabling Bigfile Tablespaces Enable support for bigfile tablespaces.



- Enabling Encrypted Tablespaces Enable support for encrypted tablespaces.
- Enabling Automatic Approval of Storage Requests Automatically enable the approval of storage requests up to the selected size.
- Deleting Uploaded Files
 Specify the number of days after which Oracle Application Express automatically deletes uploaded files.

3.5.3.3.1 Requiring a New Schema

Control if a user requesting a workspace can select an existing schema or must request a new schema.

- **1**. To require a new schema when creating a workspace:
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Instance Settings.
- 4. Scroll down to **Storage**.
- 5. From **Require New Schema**, select one of the following:
 - **Yes** Requires users to request a new schema when they request a new workspace.
 - No Enables users to select an existing schema when they request a new workspace.
- 6. Click Apply Changes.



3.5.3.3.2 Enabling Auto Extend Tablespaces

Enable Auto Extend Tablespaces.

If Auto Extend Tablespaces is enabled, tablespaces provisioned with Oracle Application Express are created with a data file that is one tenth the requested size. The data file automatically extends up to the requested size. For example, if a user requests a 100 MB workspace, the initial size of the data file is 10 MB and automatically extends up to a maximum size of 100 MB.

- **1.** To enable Auto Extend Tablespaces:
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Instance Settings.
- 4. Scroll down to Storage.
- 5. To enable Auto Extend Tablespaces, select Yes.



6. Click Apply Changes.

3.5.3.3.3 Enabling Bigfile Tablespaces

Enable support for bigfile tablespaces.

When a workspace is provisioned, Oracle Application Express creates the associated database user, tablespace, and data file. If Bigfile Tablespaces is enabled, tablespaces provisioned with Oracle Application Express are created as bigfile tablespaces. A bigfile tablespace is a tablespace with a single, but very large data file. Traditional smallfile tablespaces, in contrast, can contain multiple data files, but the files cannot be as large.

Tip:

Oracle does not recommend using bigfile tablespaces on platforms that do not support large file sizes and can limit tablespace capacity. Refer to your operating system specific documentation for information about maximum supported file sizes.

- 1. To enable bigfile tablespaces:
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Instance Settings.
- 4. Scroll down to **Storage**.
- 5. For Bigfile Tablespaces, select Yes.
- 6. Click Apply Changes.

See Also:

"Available Parameter Values" in *Oracle Application Express API Reference* to learn about the **BIGFILE_TABLESPACES_ENABLED** parameter

3.5.3.3.4 Enabling Encrypted Tablespaces

Enable support for encrypted tablespaces.

If Encrypted Tablespaces is enabled, tablespaces provisioned with Oracle Application Express are created as encrypted tablespaces using the Oracle database feature Transparent Data Encryption (TDE). TDE encrypts sensitive data stored in data files. To prevent unauthorized decryption, TDE stores the encryption keys in a security module external to the database.

To be able to exploit this feature in Application Express, an encryption wallet must be created and with a master encryption key set. Additionally, the encryption wallet must be open before provisioning a new Application Express workspace.

1. To enable Encrypted Tablespaces:



- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Instance Settings.
- 4. Scroll down to Storage.
- 5. For Encrypted Tablespaces, select Yes.
- 6. Click Apply Changes.

See	Δ.		
See	A	150:	

"Available Parameter Values" in *Oracle Application Express API Reference* to learn about the ENCRYPTED_TABLESPACES_ENABLED parameter

3.5.3.3.5 Enabling Automatic Approval of Storage Requests

Automatically enable the approval of storage requests up to the selected size.

To use this option, the workspace Provisioning Method must be set to **Automatic**. If the workspace Provisioning Method is set to **Manual** or **Request** then storage requests cannot be automatically approved.

- **1**. To automatically enable the approve storage requests:
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Instance Settings.
- 4. Scroll down to Storage.
- 5. For Automatically Approve Requests, select a value.
- 6. Click Apply Changes.



"Selecting a Workspace Provisioning Mode"

3.5.3.3.6 Deleting Uploaded Files

Specify the number of days after which Oracle Application Express automatically deletes uploaded files.

Use Delete Uploaded Files After (days) to specify the number of days after which Oracle Application Express automatically deletes uploaded files. Note this automatic deletion process applies to all workspaces in an Oracle Application Express instance. The types of files that are deleted include:

- Application Export
- CSS Export



- Images Export
- Page Export
- Plug-in
- Script Export
- Spreadsheet / Text Data Import
- Static Files Export
- Themes
- User Interface Defaults
- Workspace Export
- XML Data Import
- 1. To configure when export and import files are deleted:
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Instance Settings.
- 4. Scroll down to Storage.
- 5. In **Delete Uploaded Files After (days)**, enter the number of days after which Oracle Application Express deletes uploaded files.

Enter a positive, whole number. If this setting is null, then no files are automatically deleted.

6. Click Apply Changes.



3.5.3.4 Configuring Email

To enable Oracle Application Express to send mail, an instance administrator must configure instance-level email settings.

💡 Tip:

You can configure Oracle Application Express to automatically email users their login credentials when a new workspace request has been approved. See "About Specifying How Workspaces Are Created" and "Selecting a Workspace Provisioning Mode."



- About Enabling Network Services
 You must enable network services in Oracle Database 11g or later versions to
 send outbound mail, use Web services, or use PDF report printing in Oracle
 Application Express.
- Configuring Email in a Full Development Environment An Instance administrator must configure Oracle Application Express to send mail in a full development environment.
- Configuring Email in a Runtime Environment An Instance administrator must configure Oracle Application Express to send mail in a runtime environment.
- Determining Email Settings in a Runtime Environment Determine email settings in runtime environment.

See Also:

"Managing the Mail Queue" and "APEX_MAIL" in Oracle Application Express API Reference

3.5.3.4.1 About Enabling Network Services

You must enable network services in Oracle Database 11g or later versions to send outbound mail, use Web services, or use PDF report printing in Oracle Application Express.

Enabling network services enables support for sending outbound mail in Oracle Application Express, use of Web services in Oracle Application Express, and PDF report printing.

By default, the ability to interact with network services is disabled in Oracle Database 11g Release 2 or later. Therefore, if you are running Oracle Application Express with Oracle Database 11g Release 2 or later, you must use the new DBMS_NETWORK_ACL_ADMIN package to grant connect privileges to any host for the APEX_200100 database user. Failing to grant these privileges results in issues with:

• Sending outbound mail in Oracle Application Express.

Users can call methods from the APEX_MAIL package, but issues arise when sending outbound email.

- Using Web services in Oracle Application Express.
- PDF/report printing.



See Also: "Enabling Network Services in Oracle Database 11g or Later" for your installation scenario in Oracle Application Express Installation Guide: "Installing Application Express and Configuring Oracle REST Data Services" "Installing Application Express and Configuring Embedded PL/SQL Gateway" "Installing Application Express and Configuring Oracle HTTP Server"

3.5.3.4.2 Configuring Email in a Full Development Environment

An Instance administrator must configure Oracle Application Express to send mail in a full development environment.

- **1.** To configure Oracle Application Express to send mail in a full development environment:
- **1.** Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Instance Settings.
- 4. Scroll down to Storage.
- 5. Under Email, edit the following:
 - a. Application Express Instance URL Specify the URL to this Application Express instance, including the trailing slash after the Database Access Descriptor or Context Root. This setting is used for system-generated emails. For example:

https://www.example.com/apex/

b. Application Express Images URL - Specify the full URL to the images directory of this Application Express instance, including the trailing slash after the images directory. This setting is used for system-generated emails..

https://www.example.com/i/

- c. SMTP Host Address Defines the server address of the SMTP server. By default on installation, this is set to localhost. If you are using another server as an SMTP relay, change this parameter to that server's address.
- d. **SMTP Host Port** Defines the port the SMTP server listens to for mail requests. The default setting is 25.
- e. SMTP Authentication Username If you enter a username, Oracle Application Express authenticates against it when sending emails. Prior to Oracle Database 11g Release 2 (11.2.0.2), only the SMTP authentication scheme "LOGIN" is supported. On newer database versions, all authentication schemes of UTL_SMTP are supported.
- f. SMTP Authentication Password If you enter a password, Oracle Application Express authenticates against it when sending emails. Prior to Oracle Database 11g Release 2, Release 11.2.0.2, only the SMTP

authentication scheme "LOGIN" is supported. On newer database versions, all authentication schemes of UTL_SMTP are supported.

g. Use SSL/TLS - Beginning with Oracle Database 11g Release 2, Release 11.2.0.2, Application Express supports secure SMTP connections.

Options include:

- Yes A secure connection with SSL/TLS is made before SMTP communication.
- After connection is established Oracle Application Express sends the SMTP command STARTTLS immediately after the connection is opened.
- No A non-secure connection is opened.
- h. Default Email From Address Defines the from address for tasks that generate email, such as approving a provision request or resetting a password.
- i. Maximum Emails per Workspace Defines the number of email messages that can be sent with the APEX_MAIL API per workspace per 24 hour period.
- 6. Click Apply Changes.

3.5.3.4.3 Configuring Email in a Runtime Environment

An Instance administrator must configure Oracle Application Express to send mail in a runtime environment.

- 1. To configure Oracle Application Express to send mail in a runtime environment:
- 1. Start SQL*Plus and connect to the database where Oracle Application Express is installed as SYS. For example:
 - On Windows:

SYSTEM_DRIVE:\ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS password

• On UNIX and Linux:

\$ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

2. Run the following statement:

```
BEGIN
```

```
APEX_INSTANCE_ADMIN.SET_PARAMETER(PARAMETER_NAME, PARAMETER_VALUE);
COMMIT;
```

END;

🜔 Tip:

For a description of email parameters, see "Configuring Email in a Full Development Environment."



3. Once all parameters have been configured, validate the configuration:

```
BEGIN
    APEX_INSTANCE_ADMIN.VALIDATE_EMAIL_CONFIG;
END;
```



3.5.3.4.4 Determining Email Settings in a Runtime Environment

Determine email settings in runtime environment.

- 1. To determine email settings in runtime environment:
- 1. Start SQL*Plus and connect to the database where Oracle Application Express is installed as SYS. For example:
 - On Windows:

SYSTEM_DRIVE:\ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

On UNIX and Linux:

\$ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

2. Run the following statement:

```
SELECT
APEX_INSTANCE_ADMIN.GET_PARAMETER(PARAMETER_NAME)
FROM DUAL;
```

🔷 Tip:

For a description of email parameters, see "Configuring Email in a Full Development Environment."

See Also:

"GET_PARAMETER Function" in Oracle Application Express API Reference



3.5.3.5 Configuring Wallet Information

Configure wallet information (which store authentication and signing credentials) for an Oracle Application Express instance.

- About SSL and Wallet Creation
 A wallet is a password-protected container that stores authentication and signing credentials (including private keys, certificates, and trusted certificates) needed by SSL.
- Configuring a Wallet in a Full Development Environment Configure wallet settings a full development environment on the Instance Settings page.
- Configuring a Wallet in a Runtime Environment Configure wallet settings a runtime environment by starting SQL*Plus and running the following SQL statements.
- Determining Wallet Settings in a Runtime Environment Configure wallet settings in a runtime environment by starting SQL*Plus and running the following SQL statements.

3.5.3.5.1 About SSL and Wallet Creation

A wallet is a password-protected container that stores authentication and signing credentials (including private keys, certificates, and trusted certificates) needed by SSL.

Secure Sockets Layer (SSL) is an industry standard protocol that uses RSA public key cryptography with symmetric key cryptography to provide authentication, encryption, and data integrity. When SSL is enabled, https displays in the URL.

You must create a wallet if you:

- Call a SSL-enabled URL (for example, by invoking a Web service).
- Create a region of type URL that is SSL-enabled.
- Configure secure SMTP, by setting the Use SSL/TLS attribute to Yes.
- Have applications with LDAP authentication schemes that are configured to use SSL with Authentication.

Overview of Creating a Wallet

To create a wallet:

- 1. The database administrator must create a wallet on the Oracle Application Express database instance.
- 2. The instance administrator configures the Wallet attributes on the Instance Settings page to specify the file system path to the wallet and the wallet password (if required).



- "Using Oracle Wallet Manager" in Oracle Database Enterprise User Security Administrator's Guide
- "About Working with SSL Enabled Web Services" in Oracle Application Express App Builder User's Guide

3.5.3.5.2 Configuring a Wallet in a Full Development Environment

Configure wallet settings a full development environment on the Instance Settings page.

- **1**. To specify wallet settings in a full development environment:
- **1**. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Instance Settings.
- 4. Click Wallet.
- 5. Under Wallet:
 - a. Wallet Path Enter the path on the file system where the wallet is located using the following format:

file:directory-path

See field-level Help for examples.

- b. Password Enter the password needed to open the wallet. Select Check to confirm that you wish to change the wallet password to indicate that you have changed the password.
- 6. Click Apply Changes.

3.5.3.5.3 Configuring a Wallet in a Runtime Environment

Configure wallet settings a runtime environment by starting SQL*Plus and running the following SQL statements.

- 1. To specify wallet settings in a runtime environment:
- 1. Start SQL*Plus and connect to the database where Oracle Application Express is installed as SYS. For example:
 - On Windows:

SYSTEM_DRIVE:\ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

On UNIX and Linux:

\$ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

2. Run the following statement:



```
BEGIN
    APEX_INSTANCE_ADMIN.SET_PARAMETER(PARAMETER_NAME, PARAMETER_VALUE);
    COMMIT;
END;
```

See the table that follows for a description of wallet parameters.

Table 3-3 Wallet Parameters

Parameter Name	Description
WALLET_PATH	The path to the wallet on the file system, for example:
	file:/home/username/wallets
WALLET_PWD	The password associated with the wallet.

```
See Also:
"SET_PARAMETER Procedure" in Oracle Application Express API
Reference
```

3.5.3.5.4 Determining Wallet Settings in a Runtime Environment

Configure wallet settings in a runtime environment by starting SQL*Plus and running the following SQL statements.

To determine wallet settings in a runtime environment:

- 1. Start SQL*Plus and connect to the database where Oracle Application Express is installed as SYS. For example:
 - On Windows:

SYSTEM_DRIVE:\ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

On UNIX and Linux:

\$ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

2. Run the following statement:

```
SELECT
APEX_INSTANCE_ADMIN.GET_PARAMETER(PARAMETER_NAME)
FROM DUAL;
```

For a description of wallet parameters, see Table 3-3.



"GET_PARAMETER Function" in Oracle Application Express API Reference

3.5.3.6 Configuring Report Printing

Enable end users to download and print reports in various formats, including PDF.

- About Configuring Report Printing Enable report printing by configuring printing settings at the instance level, application level, and page and region level.
- Configuring Report Printing in a Full Development Environment Configure report printing at the instance-level on the Instance Settings page.
- Configuring Report Printing Settings in a Runtime Environment Configure report printing settings in a runtime environment by starting SQL*Plus and running the following SQL statements.
- Determining Report Printing Settings in a Runtime Environment Determine report printing settings in a runtime environment.

3.5.3.6.1 About Configuring Report Printing

Enable report printing by configuring printing settings at the instance level, application level, and page and region level.

To set up report printing functionality, you must configure the following printing settings:

- 1. **Instance Level**: Instance administrators must specify the level of functionality (Standard or Advanced) for an entire Oracle Application Express instance, as described in this section.
- 2. Application Level: Workspace administrators and developers can define Report Queries and Report Layouts. Report Queries and Report Layouts are stored under Shared Components and are not tied to a specific page.
- 3. **Page/Region Level**: Developers can edit the Report regions on specific pages to enable printing. This enables end users to print regions as reports in various formats.



- "Configuring a Classic Report Print Attributes" in Oracle Application Express App Builder User's Guide
- "Enabling Network Services in Oracle Database 11g or Later" for your installation scenario in Oracle Application Express Installation Guide
 - Installing Application Express and Configuring Oracle REST Data Services
 - Installing Application Express and Configuring Embedded PL/SQL Gateway
 - Installing Application Express and Configuring Oracle HTTP Server

3.5.3.6.2 Configuring Report Printing in a Full Development Environment

Configure report printing at the instance-level on the Instance Settings page.

- 1. To configure the printing of reports in a full development environment:
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Instance Settings.
- 4. Click Report Printing.
- 5. For Printer Server, select an option:
 - External (Apache FOP) Select this option if you are using Apache FOP on an external J2EE server. This option enables you to use the basic printing functionality, which includes creating report queries and printing report regions using the default templates provided in Application Express and using your own customized XSL-FO templates.
 - Oracle BI Publisher This option requires a valid license of Oracle BI Publisher (also known as Oracle XML Publisher). This option enables you to take report query results and convert them from XML to RTF format using Oracle BI Publisher. Select this option to upload your own customized RTF or XSL-FO templates for printing reports within Application Express.
 - **APEX Office Print** Print classic reports, interactive reports and report queries to PDF, using a built-in template using APEX Office Print. To configure this, you select AOP, set port and script and enter an API Key when using the AOP Cloud Service, or no key when running AOP locally.

What appears next depends upon the selected Print Server.

- 6. For External (Apache FOP) or Oracle BI Publisher, specify the following:
 - a. Protocol Select whether the print server uses HTTP or HTTPS protocol.
 - Host Address Specify the host address of the print server converting engine. By default, this is set to localhost.
 - c. Port Specify the host address of the print server converting engine. The default setting is 8888.



d. Script - Defines the script that is the print server engine. The default setting is:

/xmlpserver/convert

- 7. For APEX Office Print, specify the following:
 - a. Protocol Select whether the print server uses HTTP or HTTPS protocol.
 - **b.** Host Address Specify the host address of the print server converting engine. By default, this is set to localhost.
 - c. Port Specify the host address of the print server converting engine. The default setting is 8888.
 - d. Script Defines the script that is the print server engine.
 - e. API Key If you are using APEX Office Print Cloud Server, enter the Print Server API Key. Do not enter an API Key if you running APEX Office Print locally.
- 8. Print Timeout Enter the number of seconds. This option defines the transfer timeout for communicating with the print server in seconds.
- 9. Click Apply Changes.

🖍 See Also:

PDF Printing in Application Express to learn more about installing and configuring Oracle BI Publisher.

3.5.3.6.3 Configuring Report Printing Settings in a Runtime Environment

Configure report printing settings in a runtime environment by starting SQL*Plus and running the following SQL statements.

- **1.** To configure report printing settings in a runtime environment:
- 1. Start SQL*Plus and connect to the database where Oracle Application Express is installed as SYS. For example:
 - On Windows:

SYSTEM_DRIVE:\ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

• On UNIX and Linux:

\$ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

2. Run the following statement:

```
BEGIN
    APEX_INSTANCE_ADMIN.SET_PARAMETER(PARAMETER_NAME, PARAMETER_VALUE);
    COMMIT;
END;
```

For a description of available parameters, see Table 3-4.



Parameter Name	Description		
PRINT_BIB_LICENSED	Specify either standard support or advanced support. Advanced support requires an Oracle BI Publisher license. Valid values include:		
	• STANDARD		
	• ADVANCED		
	• APEX_LISTENER		
PRINT_SVR_HOST	Specifies the host address of the print server converting engine, for example, localhost. Enter the appropriate host address if the print server is installed at another location.		
PRINT_SVR_PORT	Defines the port of the print server engine, for example 8888. Value must be a positive integer.		
PRINT_SVR_PROTOCOL	Valid values include:		
	• http		
	• https		
PRINT_SVR_SCRIPT	Defines the script that is the print server engine, for example:		
	/xmlpserver/convert		

Table 3-4 Report Printing Parameters in Runtime Environment

See Also:

"SET_PARAMETER Procedure" in Oracle Application Express API Reference

3.5.3.6.4 Determining Report Printing Settings in a Runtime Environment

Determine report printing settings in a runtime environment.

- **1**. To determine report printing settings in a runtime environment:
- 1. Start SQL*Plus and connect to the database where Oracle Application Express is installed as SYS. For example:
 - On Windows:

SYSTEM_DRIVE:\ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

On UNIX and Linux:

\$ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

2. Run the following statement:

SELECT APEX_INSTANCE_ADMIN.GET_PARAMETER(*PARAMETER_NAME*) FROM DUAL;

ORACLE

🖋 See Also:

- See "Table 3-4" for a description of available parameters.
- "GET_PARAMETER Function" in Oracle Application Express API Reference

3.5.3.7 Configuring the Help Menu

Configure the target URL of the Help menu that displays in the upper right corner of the Oracle Application Express development environment.

By default, the Help menu in Oracle Application Express points to the current Oracle Application Express online documentation library. You can change the target URL under Instance Settings, Help.

- **1**. To configure the Help menu:
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Instance Settings.
- 4. Click Help.
- 5. In Help URL, edit the URL.

The URL defined here displays when users click the Help link from within Oracle Application Express.

6. Click Apply Changes.

🖍 See Also:

"Using Oracle Application Express Documentation" in Oracle Application Express App Builder User's Guide

3.5.3.8 Configuring Workspace Size Requests

Configure the size options available to users when they request a new workspace and schema or request additional storage for an existing workspace.

- 1. To configure workspace size options:
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Instance Settings.
- 4. Under New Workspace Request Size, specify the following:
 - a. Size in Megabytes Edit the default numbers to change the size options.
 - **b.** Display Select **Yes** for all the size options you want to appear in the select list for workspace size.



- c. Default Select the default value to appear in the storage field for workspace and change requests.
- 5. Under Workspace Change Request Size, specify the following:
 - a. Size in Megabytes Edit the default numbers to change the size options.
 - **b.** Display Select **Yes** for all the size options you want to appear in the select list for workspace size.
 - **c.** Default Select the default value to appear in the storage field for workspace and change requests.
- 6. Click Apply Changes.

"Enabling Auto Extend Tablespaces"

3.5.3.9 Managing Application ID Range

Control the range for IDs of new database applications and Websheet applications.

You can separate ID ranges in large multi-instance installations to easily move workspaces between the instances and still keep their application IDs. To enable ID ranges, you must specify at least an ID Minimum.

- 1. To configure the application ID ranges:
- **1.** Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Instance Settings.
- 4. Click Application ID Range and specify the following:
 - ID Minimum Enter the lower range for database and Websheet application IDs.
 - ID Maximum Enter the maximum range for database and Websheet application IDs.
- 5. Click Apply Changes.

3.5.4 Purging Inactive Workspaces

Inactive workspaces consume valuable storage space and degrade system performance. Instance administrator can configure an instance to periodically purge inactive workspaces.

By enabling Workspace Purge Settings, you can configure Oracle Application Express to purge inactive workspaces. If a workspace is designated as inactive, Oracle Application Express sends notification email to each workspace administrator explaining that the workspace will be purged in a specific number of days. The workspace administrator can prevent the workspace from being purged by following an embedded link and following the online instructions.



Configuring Workspace Purge Settings
 Configure workspace purge settings on the Workspace Purge Settings page.

See Also:

"Monitoring Activity Across a Development Instance" to view reports concerning purging workspaces and "Sending Email from an Application" in Oracle Application Express App Builder User's Guide

3.5.4.1 Configuring Workspace Purge Settings

Configure workspace purge settings on the Workspace Purge Settings page.

If a workspace is designated as inactive, Oracle Application Express sends a notification email to each workspace administrator explaining that the workspace will be purged in a specific number of days. In order for this email notification to work, you must configure email for your instance. See "Configuring Email."

To configure workspace purge settings:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Workspace Purge Settings.
- 4. On the Workspace Purge Settings, configure the following:
 - a. Enabled Select **Yes** to enable the workspace purge process. Select **No** to disable the workspace purge process.
 - **b.** Language Select the language of the text of emails sent to workspace administrators of inactive workspaces. Note that only one language can be selected for each instance.
 - c. Purge Administration Email Address Enter the email address (or From address) from which emails are sent to workspace administrators.
 - d. Send Summary Email To Enter a list of email addresses separated by commas. Recipients will receive a daily email summary of the purge process.
 - e. Days Until Purge Enter the number of days before a workspace is physically purged. For example, entering 10 means a workspace will be purged 10 days after it is added to the inactive list.
 - f. Reminder Days in Advance Enter the number of days before the purge date to send a reminder email to workspace administrators. Reminder email criteria includes:
 - The workspace is on the inactive list.
 - There has been no activity in the workspace.
 - The workspace administrator has not chosen to follow the link in the email to prevent the workspace from being purged.
 - **g.** Days Inactive Enter the number of days of inactivity before a workspace is classified as inactive. Inactivity includes not logging into the workspace and the no runtime activity of any application in the workspace.



- h. Grace Period (Days) Enter the number of days for the grace period. The grace period starts after workspace administrators click the link in the email to not have their workspace purged. If there is no activity during the grace period, the workspace is added back to the list of inactive workspaces.
- i. Maximum Execution Time (Hours) Enter the number limiting the number of hours that the purge process may execute per run of the workspace purge job
- j. Maximum Number of Workspaces Enter the maximum number of workspaces to be purged per run of the workspace purge job.
- k. Maximum Number of Emails Enter the maximum number of reminder emails and workspace inactive emails to be send per run of the workspace purge job.
- 5. Click Apply Changes.

3.5.5 Using the REST Administration Interface to View Usage Statistics

The REST Administration Interface enables Instance administrators to automatically fetch usage metrics for an Oracle Application Express instance with a REST client.

Tip:

The REST Administration Interface requires Oracle REST Data Services (ORDS) release 3.0.5 or later.

About the REST Administration Interface

To use the REST Administration Interface, you first register a REST client application and then review client details to obtain an access token following the OAuth Client Credentials authentication flow.

- Enabling the REST Administration Interface After installation, the REST Administration Interface is disabled. To enable it, an instance administrator must sign in to Oracle Application Express Administration Services.
- Registering REST Client Applications In order for REST clients to connect, an internal administrator must register the REST Client applications.
- Viewing REST Client Details View REST client details in the REST Administration Interface dialog.
- Removing a REST Client Remove a REST client while viewing the ORDS Client Details dialog.
- Disabling the REST Administration Interface
 Disable the REST Administration Interface in the REST Administration Interface
 dialog.



- "Tutorial: Protecting and Accessing Resources" in Oracle REST Data Services Installation, Configuration, and Development Guide to learn more about using OAuth flow features
- "Using REST Administration Interface API" in Oracle Application Express
 API Reference

3.5.5.1 About the REST Administration Interface

To use the REST Administration Interface, you first register a REST client application and then review client details to obtain an access token following the OAuth Client Credentials authentication flow.

To provide the REST administration interface, Oracle Application Express creates the database user APEX_INSTANCE_ADMIN_USER during installation. This low-privileged schema only has the CREATE SESSION system privilege and is locked after installation. To use the REST Administration Interface, the APEX_INSTANCE_ADMIN_USER user must first be unlocked. The service modules for the REST administration interface are being stored in the APEX_INSTANCE_ADMIN_USER schema. Oracle does not require or recommend direct logins into APEX_INSTANCE_ADMIN_USER.

3.5.5.2 Enabling the REST Administration Interface

After installation, the REST Administration Interface is disabled. To enable it, an instance administrator must sign in to Oracle Application Express Administration Services.

To enable the REST Administration Interface:

- **1.** Unlock the APEX_INSTANCE_ADMIN_USER database user in the APEX database.
- 2. Sign in to Oracle Application Express Administration Services.
- 3. Click Manage Instance.
- 4. Under Instance Settings, click **REST Administration Interface**.
- 5. In the REST Administration Interface dialog, click **Enable Services**.

3.5.5.3 Registering REST Client Applications

In order for REST clients to connect, an internal administrator must register the REST Client applications.

To register REST client applications:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click **REST Administration Interface**.
- 4. In the REST Administration Interface dialog, click Create OAuth Client.
- 5. In the Create New OAuth Client dialog, enter the following:



- Client Name
- Contact Email Address
- Client Role

Credentials for the OAuth Client Credentials Flow is automatically created (Client ID and Client Secret). With these credentials, a REST client can connect to the REST Administration Interface and execute services.

6. Click Create OAuth Client.

The client appears in the OAuth Clients list.

3.5.5.4 Viewing REST Client Details

View REST client details in the REST Administration Interface dialog.

Developers can use REST Client Details to obtain an access token following the OAuth Client Credentials authentication flow.

🚫 Tip:

To learn more about using OAuth flow features, see "Tutorial: Protecting and Accessing Resources" in *Oracle REST Data Services Installation, Configuration, and Development Guide.*

To view REST client details:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click REST Administration Interface.

The REST Administration Interface dialog appears.

4. In the REST Administration Interface dialog, click the client name.

The ORDS Client Details dialog appears displaying the client name, contact email address, OAuth Client ID, and OAuth Client Secret.



	ORDS Client Details ×	
OAuth Client Details		
Client Name	Some New Ap	p
Contact Email Address	someone@company.co	m
OAuth Client ID	akUIzBGujMsmJ8KHy479xw.	
OAuth Client Secret	F_YGTq8W0fqC-zxy9neezg.	
Back Remove Client		

See Also: To remove the current client, click **Remove Client**.

5. To return to the previous screen **Back**.



3.5.5.5 Removing a REST Client

Remove a REST client while viewing the ORDS Client Details dialog.

To remove a REST client:

- **1**. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- Under Instance Settings, click REST Administration Interface.
 The REST Administration Interface dialog appears.
- In the REST Administration Interface dialog, click the client name. The ORDS Client Details dialog appears.



	ORDS Client Details	×
OAuth Client Details		
Client Name		Some New App
Contact Email Address		someone@company.com
OAuth Client ID		akUIzBGujMsmJ8KHy479xw
OAuth Client Secret		F_YGTq8W0fqC-zxy9neezg
Back Remove Client		

- 5. Click Remove Client.
- 6. To return to the previous screen **Back**.

3.5.5.6 Disabling the REST Administration Interface

Disable the REST Administration Interface in the REST Administration Interface dialog.

To disable the REST Administration Interface:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click REST Administration Interface.
- 4. In the REST Administration Interface dialog, click **Disable Services** or **Disable Services and Remove Clients**.

3.6 Using the Productivity and Sample Applications Repository

Upload and manage custom applications uploaded to the Productivity and Sample Applications repository and monitor productivity and sample installations.

- Accessing the Productivity and Sample Applications Repository The Productivity and Sample Applications repository displays currently installed custom, productivity, and sample applications.
- Managing Custom Applications
 Instance administrators manage custom applications by uploading them to the
 Productivity and Sample Applications repository.



See Also: "About Specifying How Workspaces Are Created"

3.6.1 Accessing the Productivity and Sample Applications Repository

The Productivity and Sample Applications repository displays currently installed custom, productivity, and sample applications.

Although the Productivity and Sample Applications repository displays all custom, productivity, and sample applications installed in the current workspace, instance administrators can only edit custom applications.

To view the Productivity and Sample Applications repository:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Manage Shared Components, click **Productivity and Sample Applications**.

The Productivity and Sample Applications page displays as an interactive report. You can customize the appearance of the page using the Search bar at the top of the page.

3.6.2 Managing Custom Applications

Instance administrators manage custom applications by uploading them to the Productivity and Sample Applications repository.

- About Making Custom Apps Available to Users
 Once a custom application has been added to the Productivity and Sample
 Applications repository, developers can view, install, run, upgrade and deinstall it in the App Gallery.
- Uploading a Custom App to the Repository Upload custom applications to the Productivity and Sample Applications repository.
- Editing Custom Application Details Track variety of information about a custom application and configure App Gallery behavior by editing the application details.
- Deleting a Custom Application Delete custom applications from the Productivity and Sample Applications repository.

3.6.2.1 About Making Custom Apps Available to Users

Once a custom application has been added to the Productivity and Sample Applications repository, developers can view, install, run, upgrade and deinstall it in the App Gallery.

Developers can develop their own custom applications. Like Oracle-supplied productivity and sample applications, custom applications typically include both



application pages and the supporting database objects. To create a custom applications, you first export it. Then, an instance administrator adds the application export to Productivity and Sample Applications repository.

🖓 Tip:

Although the Productivity and Sample Applications repository displays all applications installed in the current workspace, instance administrators can only edit custom applications.

See Also:

"Utilizing Packaged Applications" and "Exporting an Application" in Oracle Application Express App Builder User's Guide

3.6.2.2 Uploading a Custom App to the Repository

Upload custom applications to the Productivity and Sample Applications repository.

To upload a custom application to the repository:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Manage Shared Components, click **Productivity and Sample Applications**.
- 4. Click Create.
- 5. For Specify File:
 - a. Import file Navigate to the file.
 - b. File Type Select the type of export file to be imported.
 - c. File Character Set Verify that File Character Set is correct.
 - d. Click Next.
- 6. For Application Details:
 - a. Application ID Specify a unique integer value that identifies the application. The default is the value of Export File Application. Application IDs in the range of 3000 to 9000 are reserved for internal use by Oracle Application Express.
 - b. Category Select the primary category to associate with the application.

To learn more about this attribute, see field-level Help.

- c. Description Enter a brief description of the application.
- d. Click Next.
- 7. Click Create.

To learn more about an attribute, see field-level Help.



3.6.2.3 Editing Custom Application Details

Track variety of information about a custom application and configure App Gallery behavior by editing the application details.

🖓 Tip:

Although the Productivity and Sample Applications repository displays all applications installed in the current workspace, instance administrators can only upload, edit, and delete custom applications.

Administrators track a variety information about an uploaded custom application including the application name, descriptions, group, status, associated categories, tags, language, and version. Use **Status** to control if an application displays in the App Gallery.

To edit application details:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Manage Shared Components, click **Productivity and Sample Applications**.
- 4. Locate the application and click the Edit icon adjacent to the application name.

The Application Detail page appears.

- 5. Under Application Detail:
 - a. Edit the appropriate attributes, including the name, description, group, status, associated categories, tags, and language.
 - **b.** Configure **Status** to control if an application displays in the App Gallery. Options include **Available**, **Coming Soon**, or **Hidden**.
- 6. Under Statistics:
 - a. Unlock Allowed Indicate whether the application should support the option to be unlocked and editable once installed in a workspace. If an application should always remain locked, select No.
 - b. Page Count Enter the number of pages in the application.
 - c. Object Count Enter the number of database objects associated with the application.
 - d. Required Free Space in KB Identifies the amount of free space required to install the supporting objects associated with the application. The free space will not be checked for a value of zero.
- 7. Under Version:
 - a. Release Date Select a date from the calendar.
 - **b.** Display Version Specify the application version number, based on the value in the Version defined in Edit Application Properties.
 - c. Build Version Specify the build version number as an integer.



- d. Minimum APEX Version Specify the minimum version of Oracle Application Express required to install the application.
- e. Minimum DB Version Specify the minimum version of Oracle Database required to install the application.
- f. Change Log Specify, in bullet points using HTML markup, the primary changes that have been made to the application since the previous version. This information displays on Application Detail page, where a newer version of the application is available for installation.
- 8. Under Version:
 - a. Company Indicates the provider of the application.
 - **b.** Email Indicates the support email address for the provider of the application. For all internally produced applications, the field should be left blank.
 - c. Website Indicates the website for the provider of the application.
- 9. Edit the other remaining attributes.
- **10.** Click **Apply Changes**.

3.6.2.4 Deleting a Custom Application

Delete custom applications from the Productivity and Sample Applications repository.

To delete a custom application:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- **3.** Under Manage Shared Components, click **Productivity and Sample Applications**.
- 4. Locate the application and click the **Edit** icon adjacent to the application name.

The Application Detail page appears.

5. Click Delete and follow the on-screen instructions.

3.7 Managing Public Themes

Create public themes that are available to developers when they create an application or modify an existing application.

Instance administrators manage the theme repository for an entire Oracle Application Express instance. Only an Instance administrators can add or delete a theme from the repository.

• Adding a Public Theme to the Theme Repository

To create a public theme, an instance administrator adds it to the Public Themes repository.

• Deleting a Public Theme Only an Instance administrators can delete a theme from the Public Themes repository.



Modifying a Public Theme

Instance administrators cannot edit a public theme directly. To modify a public theme, you must create a new application using the theme, modify it, and then manually add it to the theme repository.

• About Exporting a Public Theme Exporting a theme is similar to exporting any related application files.

See Also:

"Managing Instance Themes" in Oracle Application Express App Builder User's Guide

3.7.1 Adding a Public Theme to the Theme Repository

To create a public theme, an instance administrator adds it to the Public Themes repository.

To add a theme to the Theme repository:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- Under Manage Shared Components, click Public Themes.
 The Public Themes page appears.
- 4. Select Create Public Theme.
- 5. For Workspace, select a workspace and click Next.
- 6. For Application, select an application and click Next.
- 7. For Theme, select a theme and click Next.
- 8. For Name, specify the following:
 - Theme Number Enter a number that uniquely identifies a theme within a workspace.
 - Theme Name Enter a name for the workspace theme.
 - Description Enter a description.
 - Click Next.
- 9. Click Create Public Theme.

3.7.2 Deleting a Public Theme

Only an Instance administrators can delete a theme from the Public Themes repository.

To delete a public theme:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Manage Shared Components, click **Public Themes**.



The Public Themes page appears.

- 4. Select the theme to be deleted.
- 5. Click Delete.
- 6. Click OK to confirm your selection.

3.7.3 Modifying a Public Theme

Instance administrators cannot edit a public theme directly. To modify a public theme, you must create a new application using the theme, modify it, and then manually add it to the theme repository.

To modify a public theme:

- 1. Create an application using the theme you want to modify. See "Creating Database Applications" in *Oracle Application Express App Builder User's Guide*.
- 2. Modify the theme. See "Editing Themes" in Oracle Application Express App Builder User's Guide.
- 3. Delete the existing public theme.
- 4. Add the modified theme to the theme repository. See "Adding a Public Theme to the Theme Repository."

3.7.4 About Exporting a Public Theme

Exporting a theme is similar to exporting any related application files.

Exporting a public theme involves the following steps:

- 1. Create an application using the theme you want to modify.
- 2. Export the application.
- 3. Import the exported file into the target Oracle Application Express instance.
- 4. Install the exported file from the Export Repository.

See Also:

Oracle Application Express App Builder User's Guide topics:

- "Creating Database Applications"
- "Exporting an Application"
- "Importing an Application, Page or Component Export"
- "About Installing Export Files"

3.8 Managing Meta Data

Use the links under Manage Meta Data to view and manage session state, the mail queue, installed translations, and interactive report descriptions.



- Managing Session State for an Instance View session state statistics and purge the session state on the Session State page.
- Managing the Mail Queue Manage email sent from applications by monitoring email messages in the mail queue.
- Viewing Installed Translations
 Access the Installed Translations page to view which translated languages have been installed within the current development instance.
- Deleting Interactive Report Subscriptions Manage the interactive report subscriptions within the current development instance.

3.8.1 Managing Session State for an Instance

View session state statistics and purge the session state on the Session State page.

- About Session State
 A session is a logical construct used to establish persistence (or stateful behavior) across page views.
- Viewing Session Details Before Purging Before purging sessions, Instance administrators can view a listing of recent sessions and then drill down on session details on the Recent Sessions page.
- Purging Sessions by Age
 Purge sessions by age on the Purge Session page.
- Viewing Session Statistics Before Purging View statistics about current sessions before purging on the Session State Statistics page.

🖋 See Also:

"Managing Session State for a Workspace" and "Managing Session State Values" in Oracle Application Express App Builder User's Guide

3.8.1.1 About Session State

A session is a logical construct used to establish persistence (or stateful behavior) across page views.

Each session is assigned a unique ID, which the Application Express engine uses to store and retrieve an application's working set of data (or session state) before and after each page view. An automatic process clears sessions older than 24 hours every eight hours. Instance administrators can also purge them manually.



"What is a Session?" in Oracle Application Express App Builder User's Guide

3.8.1.2 Viewing Session Details Before Purging

Before purging sessions, Instance administrators can view a listing of recent sessions and then drill down on session details on the Recent Sessions page.

To view a listing of recent sessions:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- Under Manage Meta Data, click Session State.
 The Session State page appears.
- 4. Click Recent Sessions.
- 5. On the Recent Sessions page, you can:
 - Click a session number to view additional details.
 - Click **Purge Sessions** to delete the displayed sessions.

3.8.1.3 Purging Sessions by Age

Purge sessions by age on the Purge Session page.

To purge sessions by age:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Manage Meta Data, click Session State.

The Session State page appears.

4. Click Purge Sessions.

The Purge Sessions page appears.

- 5. For Maximum Sessions to Purge, identify the maximum number of sessions to delete.
- 6. For Only Purge Session Older Than, specify the age of sessions to be deleted.
- 7. To purge the selected sessions, click **Purge Sessions**.

3.8.1.4 Viewing Session Statistics Before Purging

View statistics about current sessions before purging on the Session State Statistics page.

To view session state statistics:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.



3. Under Manage Meta Data, click Session State.

The Session State page appears.

- 4. Select Session State Statistics.
- 5. To delete current sessions, click **Purge Sessions**.

3.8.2 Managing the Mail Queue

Manage email sent from applications by monitoring email messages in the mail queue.

 Tip:
 To view the Mail Log, see "Monitoring Activity Across a Development Instance"

• Sending and Deleting Messages in the Mail Queue Use the Mail Queue to push, delete, or reset messages in the mail queue.

3.8.2.1 Sending and Deleting Messages in the Mail Queue

Use the Mail Queue to push, delete, or reset messages in the mail queue.

To send and delete messages in the mail queue:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Manage Meta Data, click Mail Queue.

The Mail Queue page appears.

If there is an issue sending an email (for example, because of a bad email address or unavailable mail server) then the mail message remains in the queue along with the last encountered error. The Oracle Application Express instance will automatically attempt to resend this mail message up to 14 times. For every subsequent attempt to send the email, the gap in time between send attempts exponentially increases (2 minutes, 4 minutes, 8 minutes, 16 minutes, and so on). If the delivery remains unsuccessful, the mail message is removed from the queue and the latest error is captured in the apex_mail_log dictionary view.

- 4. Use the following buttons to manage messages in the mail queue:
 - Delete Deletes selected messages.
 - Force Send All Mail The calculated delay for messages which encounter an error is ignored and an attempt is made to push all messages in the queue.
 - **Send All Mail** Pushes the messages in the queue. The calculated delay for messages which encounter an error is observed.



💉 See Also:

- "Configuring Email"
- "Sending Email from an Application" in *Oracle Application Express App Builder User's Guide*

3.8.3 Viewing Installed Translations

Access the Installed Translations page to view which translated languages have been installed within the current development instance.

To view the list of installed translations:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Manage Meta Data, click Installed Translations.

The Installed Translations page appears. This page displays a list of languages and indicates if the translations have been loaded.

See Also:

"Managing Application Globalization" in Oracle Application Express App Builder User's Guide

3.8.4 Deleting Interactive Report Subscriptions

Manage the interactive report subscriptions within the current development instance.

To delete an interactive report subscription:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Manage Meta Data, click Interactive Report Subscriptions.

The Interactive Report Subscriptions page displays as an interactive report. You can customize the appearance of the page using the Search bar at the top of the page.

- 4. Find the subscription you want to remove and select the check box to the left.
- 5. Click Delete Checked.



- "Subscribing to Report Updates by Email" in Oracle Application Express End User's Guide
- "REMOVE_SUBSCRIPTION Procedure" in Oracle Application Express
 API Reference

3.9 Installing Exported Applications in a Runtime Environment

Instance administrators manage the Oracle Application Express runtime environment using SQL*Plus and the APEX_INSTANCE_ADMIN API.

- About the Advantages of Using Runtime Environment An runtime environment enables you to run production applications, but does not provide a web interface for administration or direct development of these applications.
- Installing an Exported Application in to a Runtime Environment You administer the Oracle Application Express runtime environment using SQL*Plus and the APEX_INSTANCE_ADMIN API.

3.9.1 About the Advantages of Using Runtime Environment

An runtime environment enables you to run production applications, but does not provide a web interface for administration or direct development of these applications.

Oracle recommends that you run any sensitive production Oracle Application Express applications with a runtime installation of Oracle Application Express. A runtime installation does not expose the web-based application development environment, thus preventing the use of App Builder, SQL Workshop, and related utilities on a production installation. Additionally, a runtime environment only includes the Oracle Application Express database objects and privileges necessary to run applications, making it a more hardened environment.

🜔 Tip:

Websheets are not supported in an Oracle Application Express runtime environment.

See Also:

"APEX_INSTANCE_ADMIN" in Oracle Application Express API Reference.



3.9.2 Installing an Exported Application in to a Runtime Environment

You administer the Oracle Application Express runtime environment using SQL*Plus and the APEX_INSTANCE_ADMIN API.

To install an exported application into a runtime installation, you must:

- Export the workspace from the Oracle Application Express instance where the application was developed as described in "Exporting and Importing a Workspace."
- 2. Use SQL*Plus to import your workspace in to the runtime environment:
 - Connect as APEX_200100, SYS, SYSTEM, or any schema to which the role APEX_ADMINISTRATOR_ROLE has been granted.
 - Run the workspace import file.

If the workspace export file was created with a version of Oracle Application Express lower than 3.2, you must connect as APEX_200100.

 Export and then import your application using SQL*Plus in to the runtime environment.

See Also:

- "Exporting an Application and Application Components" in Oracle Application Express App Builder User's Guide
- "Creating a Workspace Manually in a Runtime Environment"
- "Managing Workspace to Schema Assignments"
- "Removing a Schema Mapping from a Workspace in a Runtime Environment"
- "Deleting Workspaces in a Runtime Development Environment"

3.10 Communicating with Users Using Messages and Task Lists

Administrators can communicate with systsem users by creating messages (including login, system messages, and workspace messages) and Site-Specific Tasks lists.

- Defining a Login Message Create messages that display on the Oracle Application Express Sign In page.
- Defining a System Message Create a system message to communicate with other users within an instance.
- Defining a Workspace Message in Administration Services Create a workspace message in Administration Services.



Managing a Site-Specific Tasks List

Add links the Site-Specific Tasks list to communicate important user information such as training, discussion forums, and user feedback applications.

3.10.1 Defining a Login Message

Create messages that display on the Oracle Application Express Sign In page.

- About Login Messages
 Login messages display directly below the Oracle Application Express Sign In
 page.
- Creating a Login Message Instance administrators create login messages under Messages on the Manage Instance page.
- Editing or Removing a Login Message Instance administrators edit and remove login messages under Messages on the Manage Instance page.

3.10.1.1 About Login Messages

Login messages display directly below the Oracle Application Express Sign In page.

	Oracle Application Express
Ē	Workspace
	९ Username
4	P Password
	Remember workspace and username 💿
	Sign In
	Reset Password Request a Workspace
185311	

3.10.1.2 Creating a Login Message

Instance administrators create login messages under Messages on the Manage Instance page.

To create a login message:

1. Sign in to Oracle Application Express Administration Services.



- 2. Click Manage Instance.
- 3. Under Messages, click **Define Login Message**.
- 4. In Message, enter a message. The message can contain any text and can optionally include HTML formatting.
- 5. Click Apply Changes.

3.10.1.3 Editing or Removing a Login Message

Instance administrators edit and remove login messages under Messages on the Manage Instance page.

To edit or remove a login message:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Messages, click Define Login Message.
- 4. In Message, edit or remove the text.
- 5. Click Apply Changes.

3.10.2 Defining a System Message

Create a system message to communicate with other users within an instance.

- About System Messages System messages display on the Workspace home page, Workspace Administration page, and Administration Services home page.
- Creating and Editing a System Message Instance administrators create and edit system message.

3.10.2.1 About System Messages

System messages display on the Workspace home page, Workspace Administration page, and Administration Services home page.

On the Workspace home page (shown below), the System message includes textual identifier System Message which displays directly beneath the message text.



APEX App Builde	r v SQL Workshop	 Team Development 	✓ App Gallery ∨	Q 2,	⑦ AD
				About Oracle APEX is the application develo framework of the Database. Learn More	pment
App Builder	SQL Workshop	Team Development	App Gallery	Dashboard	
Top Apps	Top Users	Message	5	10	83
	AD admin		nple Workspace message orkspace Message	Applications	Tables
			nple System Message Istem Message	1	2
				Productivity Apps	Issues

3.10.2.2 Creating and Editing a System Message

Instance administrators create and edit system message.

To create a system message:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Messages, click Define System Message.
- 4. In Message, enter a message. The message can contain any text and can include HTML formatting.
- 5. Click Apply Changes.

3.10.3 Defining a Workspace Message in Administration Services

Create a workspace message in Administration Services.

Workspace messages display both on the Workspace home page and on the Workspace Administration page. On the Workspace home page, workspace message display in the News and Messages region.

To define a workspace message in Administration Services:

- **1.** Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Workspaces.
- 3. Under Workspace Actions, click Manage Component Availability.

The Component Availability page appears. To customize the report, use the Search bar at the top of the page.

4. Locate and select the workspace for which you want to define a workspace message.



The Workspace Settings page appears.

- 5. Under Workspace Message, enter a message in the Message field. To format the display, include standard HTML tags.
- 6. Click Apply Changes.

See Also:

"Defining a Workspace Message in Workspace Administration"

3.10.4 Managing a Site-Specific Tasks List

Add links the Site-Specific Tasks list to communicate important user information such as training, discussion forums, and user feedback applications.

A Site-Specific Tasks lists only appears on the Workspace Home page and on the Workspace Login and only appears if you've added links.

- Adding a New Task
 Instance administrators create a Site-Specific Tasks list under Manage Site Specific Tasks on the Manage Instance page.
- Editing an Existing Task Instance administrators edit existing task on the Site-Specific Task page.
- Deleting a Task Instance administrators can delete existing task on the Site-Specific Task page.

3.10.4.1 Adding a New Task

Instance administrators create a Site-Specific Tasks list under Manage Site-Specific Tasks on the Manage Instance page.

To add a new task to a Site-Specific Tasks list:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Messages, click Manage Site-Specific Tasks.

The Site-Specific Tasks page appears.

- 4. To create a new link, click Create.
- 5. On the Create/Edit Site-Specific Tasks page, you can specify the following"
 - a. Display Sequence Indicate the relative order of this task within the list.
 - **b.** Display Location Indicate the page on which the task should display. Options include:
 - Workspace Login
 - Workspace Home
 - c. Task Name Enter a name for this task.



- d. Tasks Link Enter the link target for this task using either a relative URL (for example, using f?p syntax) or an absolute URL (such as http://www.oracle.com/technetwork/index.html).
- e. Displayed Select **Yes** to display the task link. Select No to disable the display.
- 6. Click Create.

"Using f?p Syntax to Link Pages" in Oracle Application Express App Builder User's Guide

3.10.4.2 Editing an Existing Task

Instance administrators edit existing task on the Site-Specific Task page.

To edit an existing task:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- Under Messages, click Site-Specific Tasks. The Site-Specific Tasks page appears.
- 4. Select the task name.
- 5. On the Create/Edit Site-Specific Tasks page, edit the appropriate attributes.
- 6. Click Apply Changes.

3.10.4.3 Deleting a Task

Instance administrators can delete existing task on the Site-Specific Task page.

To delete an existing task:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Messages, click Site-Specific Tasks.

The Site-Specific Tasks page appears.

- 4. Select the task name.
- 5. Click Delete.

3.11 Managing Logs and Files

Delete log entries and configure log intervals.

• Deleting SQL Workshop Logs Delete SQL Workshop log entries. The SQL Workshop maintains a history of SQL statements run in the SQL Commands.



- Deleting Page View Activity Log Entries Delete Page View Activity Log entries. Page View Activity Logs track user activity for an application.
- Deleting Developer Activity Log Entries
 Delete Developer Activity Log entries.
- Managing Developer Log Retention Manage Developer Log retention.
- Deleting Click Counting Log Entries
 Delete External Clicks Counting Log entries.
- Deleting Web Service Log Entries Delete Web Service Log entries.
- Deleting the Login Access Log Delete Login Access Log entries.
- Managing Log Intervals Use the Manage Log Interval page to set the minimum number of days to retain log information for log files.
- Archiving the Activity Log Archiving the Activity log takes the Oracle Application Express Activity log, summarizes it, and writes the results to an archived activity log

3.11.1 Deleting SQL Workshop Logs

Delete SQL Workshop log entries. The SQL Workshop maintains a history of SQL statements run in the SQL Commands.

To delete SQL Workshop log entries:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Manage Logs and Files, click SQL Workshop Log.
- 4. On the SQL Workshop Logs page, click one of the following:
 - Script File executions log entries
 - SQL Command Processor history entries
- 5. On the Clean up Logs page, click one of the following:
 - a. For Delete entries this number of days and older Select the number of days.
 - b. Click one of the following:
 - Truncate Log Deletes all entries.
 - **Delete Entries** Deletes entries by age, specify the age of the entries to be deleted.

See Also:

"Accessing a Command from Command History" in Oracle Application Express SQL Workshop Guide



3.11.2 Deleting Page View Activity Log Entries

Delete Page View Activity Log entries. Page View Activity Logs track user activity for an application.

- About Page View Activity Logs
 Page View Activity Logs track user activity for an application.
- Truncating Page View Activity Logs Manually Delete Page View Activity logs manually.

3.11.2.1 About Page View Activity Logs

Page View Activity Logs track user activity for an application.

The Application Express engine uses two logs to track user activity. At any given time, one log is designated as current. For each rendered page view, the Application Express engine inserts one row into the log file. A log switch occurs at the interval listed on the Page View Activity Logs page. At that point, the Application Express engine removes all entries in the noncurrent log and designates it as current.

Tip:

Developers enable logging within their application using the Logging attribute on the Edit Application Definition page.

See Also:

"Editing the Application Definition" in Oracle Application Express App Builder User's Guide

3.11.2.2 Truncating Page View Activity Logs Manually

Delete Page View Activity logs manually.

To truncate the activity logs manually:

- **1.** Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Manage Logs and Files, click **Page View Activity Log**.

The Page View Activity Logs page appears.

- 4. Click Truncate Logs.
- 5. Click either Truncate Log 1 or Truncate Log 2.



See Also: "Viewing Workspace Dashboards"

3.11.3 Deleting Developer Activity Log Entries

Delete Developer Activity Log entries.

The Developer Activity log tracks changes to applications within an individual workspace.

To delete Developer Activity Log entries manually:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- Under Manage Logs and Files, click Developer Activity Log. The Developer Activity Log page appears.
- 4. Specify the age of the entries to be deleted and click Delete Entries.

See Also:

"Developer Activity Dashboard" for information about the Developer Activity Log

3.11.4 Managing Developer Log Retention

Manage Developer Log retention.

The Developer Activity log tracks changes to applications within an individual workspace. You can specify the number of days to retain log entries.

To specify the number of days to retain log entries:

- **1.** Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Manage Logs and Files, click **Developer Activity Log**.

The Developer Activity Log page appears.

4. Specify the number of days to retain developer log entries and click **Save Retention Setting**.

See Also:

"Developer Activity Dashboard" for information about the Developer Activity Log

ORACLE

3.11.5 Deleting Click Counting Log Entries

Delete External Clicks Counting Log entries.

The External Clicks Counting log counts clicks from an Oracle Application Express application to an external site. You can implement this functionality using the APEX_UTIL.COUNT_CLICK procedure.

To delete External Clicks Counting log entries:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- Under Manage Logs and Files, click External Click Counting Log. The External Click Counting Log page appears.
- 4. Specify the age of the entries to be deleted and click **Delete Entries**.

See Also:

"COUNT_CLICK Procedure" in Oracle Application Express API Reference

3.11.6 Deleting Web Service Log Entries

Delete Web Service Log entries.

The Web Service Activity Log records all web service requests initiated from the Application Express instance.

To delete Web Service Activity log entries:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Manage Logs and Files, click Web Service Activity Log.

The Web Service Activity Log page appears.

4. Specify the age of the entries to be deleted and click Delete Entries.

3.11.7 Deleting the Login Access Log

Delete Login Access Log entries.

The Login Access log records authentication events by developers and administrators accessing the Oracle Application Express environment and by end users of Oracle Application Express applications that use the built-in login APIs available to developers. Log entries are aged out of the log tables and purged periodically.

To truncate the Login Access log:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.



3. Under Manage Logs and Files, click Login Access Log.

The Login Access Log page appears.

4. Specify the age of the entries to be deleted and click **Delete Entries**.

3.11.8 Managing Log Intervals

Use the Manage Log Interval page to set the minimum number of days to retain log information for log files.

To manage the log interval:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Manage Logs and Files, click Manage Log Interval.

The Manage Log Interval page appears.

4. For each log type, enter the duration of the interval in days.

The maximum value that can be specified is 180 days, with a default value of 14 days. Keeping log information for longer periods can degrade runtime performance.

5. Click Apply Changes.

See Also:

SET_LOG_SWITCH_INTERVAL Procedure in Oracle Application Express API Reference

3.11.9 Archiving the Activity Log

Archiving the Activity log takes the Oracle Application Express Activity log, summarizes it, and writes the results to an archived activity log

Archiving the Activity log takes the Oracle Application Express Activity log, summarizes it, and writes the results to an archived activity log.

To archive the Oracle Application Express Activity log:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Manage Logs and Files, click Archive Activity Log.

The Archive Activity Log page appears listing the last archive date, archive day count, and workspace count.

4. Click Archive Activity Summary.



3.12 Creating a Service Signup Wizard

Instance administrators can create a Service Signup Wizard that users must complete before new workspace requests are submitted.

When users request a new workspace, administrators can create a wizard that requires the user provide a justification, accept an agreement, or optionally respond to survey questions. In addition, administrators can specify whether to support Productivity App Only workspaces, define blocked email domains and provide a message that displays when a user enters an email address containing a blocked domain, and create a custom success message.

- Defining a Service Signup Wizard Instance administrators define a Service Signup Wizard on the Service Signup Wizard page.
- Running a New Service Signup Wizard
 Instance administrators can run the Signup Wizard by clicking Run New Service
 Signup Wizard on the Manage Instance page.

3.12.1 Defining a Service Signup Wizard

Instance administrators define a Service Signup Wizard on the Service Signup Wizard page.

When users request a new workspace, administrators can create a wizard that requires the user provide a justification, accept an agreement, or optionally respond to survey questions. In addition, administrators can specify whether to support Productivity App Only workspaces, define blocked email domains and provide a message that displays when a user enters an email address containing a blocked domain, and create a custom success message.

To define a New Service Signup Wizard:

- 1. Sign in to Oracle Application Express Administration Services.
- 1. Click Manage Instance.
- 2. Under Self Service Sign Up, click Manage New Service Signup Wizard.
- 3. Under Options:
 - a. Enable Productivity App Only Workspaces Determines if users can create a Productivity App Only workspace.
 - b. Blocked Email Domains Specify a comma-delimited list of email domains that are not permitted to request a workspace, example: domain1.com,domain2.com.
 - c. Blocked Email Message Message to display if users enter a blocked email address.
 - **d.** Enable Schema Selection Determines whether the user is prompted for the database schema information or whether the schema is defaulted.
 - e. Require Justification Determines whether to prompt the user for a justification for creating the workspace.
 - f. Enable Agreement Determines whether to include or exclude an agreement. Select **Yes** to display an agreement.



- g. Agreement Text Enter the text of the agreement.
- h. Request Success Message Message to be shown to the user when they get to the Workspace Request successful page. This message replaces the standard message provided.
- 4. Under Survey Questions:
 - Enable Survey Determines whether to include or exclude the survey. Select Yes to display the survey questions you define during the New Service Signup Wizard.
 - b. Questions Each question can have any number of answers. Enter all answers for each question in one field, delimited by a new line.
 - c. Pre Text Enter introductory text.
 - d. Post Text Enter closing text.
- 5. Click Apply Changes.



3.12.2 Running a New Service Signup Wizard

Instance administrators can run the Signup Wizard by clicking **Run New Service Signup Wizard** on the Manage Instance page.

To run a new Service Signup Wizard:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Self Service Sign Up, click Run New Service Signup Wizard.
- 4. Follow the on-screen instructions.

3.13 Managing Schemas

Manage the schemas within an Oracle Application Express instance.

- What Is the Oracle Application Express Engine Schema? A schema is a logical container for the database objects.
- Determining the Oracle Application Express Engine Schema
 Determine the current Application Express engine schema for an instance.
- Understanding Oracle Default Schema Restrictions
 A database administrator (DBA) grants and revokes privileges within an Oracle Application Express instance.



See Also:

- "Viewing the Parsing Schemas Report"
- "Managing Workspace to Schema Assignments"

3.13.1 What Is the Oracle Application Express Engine Schema?

A schema is a logical container for the database objects.

Instance administrators may need to perform certain actions within the Application Express engine schema. For example, in order for an Instance administrator to have the ability to assign Oracle default schemas, the database administrator (DBA) must explicitly grant the privilege by running the APEX_SITE_ADMIN.UNRESTRICT_SCHEMA procedure within the Application Express engine.

See Also:
 "Understanding Oracle Default Schema Restrictions" for information about the APEX_SITE_ADMIN.UNRESTRICT_SCHEMA procedure

3.13.2 Determining the Oracle Application Express Engine Schema

Determine the current Application Express engine schema for an instance.



To determine the current Application Express engine schema for your Oracle Application Express instance:

- 1. Start SQL*Plus and connect to the database where Oracle Application Express is installed as SYS. For example:
 - On Windows:

SYSTEM_DRIVE:\ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

• On UNIX and Linux:

\$ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

2. Run the following query in a schema with DBA privileges (for example, SYSTEM).



SELECT DISTINCT TABLE_OWNER FROM all_synonyms WHERE SYNONYM_NAME = 'WWV_FLOW' and OWNER = 'PUBLIC'

3.13.3 Understanding Oracle Default Schema Restrictions

A database administrator (DBA) grants and revokes privileges within an Oracle Application Express instance.

- About Assigning Oracle Default Schemas to Workspaces
 In order for an Instance administrator to assign most Oracle default schemas to
 workspaces, a DBA must explicitly grant the privilege.
- Granting the Privilege to Assign Oracle Default Schemas DBAs can grant an Instance administrator the ability to assign Oracle schemas to workspaces.
- Revoking the Privilege to Assign Oracle Default Schemas DBAs can revoke the privilege to assign default schemas.
- Working with Restricted Schemas
 DBAs can work with restricted schemas by designating specific workspaces as
 exceptions, remove all workspaces exceptions for a schema, or remove all
 schema exceptions for a workspace.
- Determining the Privilege Status
 DBAs can determine the current status of the privileges.

3.13.3.1 About Assigning Oracle Default Schemas to Workspaces

In order for an Instance administrator to assign most Oracle default schemas to workspaces, a DBA must explicitly grant the privilege.

When Oracle Application Express installs, the Instance administrator does not have the ability to assign Oracle default schemas to workspaces. Default schemas such as SYS, SYSTEM, and RMAN are reserved by Oracle for various product features and for internal use. Access to a default schema can be a very powerful privilege. For example, a workspace with access to the default schema SYSTEM can run applications that parse as the SYSTEM user.

In order for an Instance administrator to have the ability to assign most Oracle default schemas to workspaces, the DBA must explicitly grant the privilege using SQL*Plus to run a procedure within the APEX_INSTANCE_ADMIN package.

🖓 Tip:

Beginning with Oracle Application Express release 3.1, the SYS and SYSTEM schemas may no longer be used by workspaces as parsing schemas.



Note:

All schema and workspace names used as arguments to procedures in the APEX_INSTANCE_ADMIN package are used exactly as they are provided by the caller.

For example, if you pass an argument value such as p_schema =>'system', the lower-case schema name 'system' is recorded and referenced. This example could return unexpected results if you really meant to reference the common schema name SYSTEM, which would be referenced using upper case.

3.13.3.2 Granting the Privilege to Assign Oracle Default Schemas

DBAs can grant an Instance administrator the ability to assign Oracle schemas to workspaces.

A DBA grants an Instance administrator the ability to assign Oracle schemas to workspaces by using SQL*Plus to run the APEX_INSTANCE_ADMIN.UNRESTRICT_SCHEMA procedure from within the Application Express engine schema. For example:

```
EXEC APEX_INSTANCE_ADMIN.UNRESTRICT_SCHEMA(p_schema => 'RMAN');
COMMIT;
```

This example would enable the Instance administrator to assign the RMAN schema to any workspace.

See Also:
"Determining the Oracle Application Express Engine Schema"

3.13.3.3 Revoking the Privilege to Assign Oracle Default Schemas

DBAs can revoke the privilege to assign default schemas.

A DBA revokes the privilege to assign default schemas using SQL*Plus to run the APEX_INSTANCE_ADMIN.RESTRICT_SCHEMA procedure from within the Application Express engine schema. For example:

```
EXEC APEX_190200.APEX_INSTANCE_ADMIN.RESTRICT_SCHEMA(p_schema => 'RMAN');
COMMIT;
```

This example would prevent the Instance administrator from assigning the RMAN schema to any workspace. It does not, however, prevent workspaces that have already had the RMAN schema assigned to them from using the RMAN schema.



See Also: "Determining the Oracle Application Express Engine Schema"

3.13.3.4 Working with Restricted Schemas

DBAs can work with restricted schemas by designating specific workspaces as exceptions, remove all workspaces exceptions for a schema, or remove all schema exceptions for a workspace.

- Removing Workspace Exceptions for a Schema DBAs can remove all workspace exceptions for a schema.
- Removing Schema Exceptions for a Workspace DBAs can remove all schema exceptions for a workspace.
- Designating Specific Workspaces as Exceptions DBAs can designate specific workspaces as exceptions.

3.13.3.4.1 Removing Workspace Exceptions for a Schema

DBAs can remove all workspace exceptions for a schema.

A DBA can remove all workspace exceptions for a schema by using SQL*Plus to run the APEX_INSTANCE_ADMIN.REMOVE_SCHEMA_EXCEPTIONS procedure from within the Application Express engine schema. For example:

EXEC APEX_050200.APEX_INSTANCE_ADMIN.REMOVE_SCHEMA_EXCEPTIONS(p_schema => 'RMAN');
COMMIT;

This example would prevent the Instance administrator from assigning the RMAN schema to any workspaces if the RMAN schema were already restricted, but had one or more exceptions previously created for it.

3.13.3.4.2 Removing Schema Exceptions for a Workspace

DBAs can remove all schema exceptions for a workspace.

DBAs can remove all schema exceptions for a workspace by using SQL*Plus to run the APEX_INSTANCE_ADMIN.REMOVE_WORKSPACE_EXCEPTIONS procedure from within the Application Express engine schema. For example:

EXEC APEX_190200.APEX_INSTANCE_ADMIN.REMOVE_WORKSPACE_EXCEPTIONS(p_workspace =>
'AUDITOR_WORKSPACE');
COMMIT;

This example would prevent the Instance administrator from assigning any restricted schemas to the workspace named AUDITOR_WORKSPACE if that workspace had exceptions previously created for it for any restricted schemas.



3.13.3.4.3 Designating Specific Workspaces as Exceptions

DBAs can designate specific workspaces as exceptions.

If a schema has been designated as restricted using the CREATE_SCHEMA_EXCEPTION procedure, the DBA can designate specific workspaces as exceptions by running the APEX_INSTANCE_ADMIN.CREATE_SCHEMA_EXCEPTION procedure. For example:

EXEC APEX_190200.APEX_INSTANCE_ADMIN.CREATE_SCHEMA_EXCEPTION(p_schema => 'RMAN', p_workspace=> 'DBA_WORKSPACE'); EXEC APEX_190200.APEX_INSTANCE_ADMIN.CREATE_SCHEMA_EXCEPTION(p_schema => 'RMAN', p_workspace => 'AUDITOR_WORKSPACE'); COMMIT;

This example would prevent the Instance administrator from assigning the RMAN schema to the workspace named AUDITOR_WORKSPACE. However this restriction only applies to workspace provisioning requests processed after the REMOVE_SCHEMA_EXCEPTION procedure has been run. If the AUDITOR_WORKSPACE has the RMAN schema assigned to it, this method would not prevent that workspace from continuing to use the schema.

3.13.3.5 Determining the Privilege Status

DBAs can determine the current status of the privileges.

A DBA can determine the current status of the privileges by using SQL*Plus to run the script report_instance_configuration.sql in the utilities directory. For example:

To run the script report_instance_configuration.sql in the utilities directory:

1. Change to the utilities directory.

\$ cd utilities

- 2. Connect in SQL*Plus and connect to the database where Oracle Application Express is installed as SYS, for example:
 - On Windows:

SYSTEM_DRIVE:\ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

On UNIX and Linux:

\$ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

3. Run the following statement:

SQL> @report_instance_configuration.sql

The resulting report displays general information about the Application Express instance, including restricted schemas and schema exceptions.

3.14 Creating Workspaces in Administration Services

Users access Oracle Application Express by signing in to a shared work area called a workspace. An administrator can create workspaces manually in Administration



Services or take advantage of an automated approach in which users click a link a login page.

About Workspaces

A workspace enables multiple users to work within the same Oracle Application Express installation while keeping their objects, data and applications private. Each workspace has a unique numeric ID and name.

About Specifying How Workspaces Are Created

The Instance administrator determines how the process of provisioning (or creating) a workspace works for a specific Oracle Application Express instance.

- Selecting a Workspace Provisioning Mode An Instance Administrator selects a Provisioning Method to determine how workspace provisioning works.
- How Oracle-Managed Files Effects Workspace Provisioning When an Instance administrator creates a new workspace with a new schema, a new tablespace and data file are created for that schema. If Oracle-Managed Files is enabled, it manages the data file for the new tablespace.
- Creating a Workspace Manually Instance administrators can provision a workspace manually in either a full development environment or a runtime environment.
- Creating Multiple Workspaces
 Provision multiple workspaces by running the Create Multiple Workspaces Wizard

🖍 See Also:

- "Requesting a Workspace in Workspace Administration"
- "Requesting Another Workspace"
- "Managing Existing Workspaces"

3.14.1 About Workspaces

A workspace enables multiple users to work within the same Oracle Application Express installation while keeping their objects, data and applications private. Each workspace has a unique numeric ID and name.

To make changes to a workspace, the Workspace administrators must submit a service or change requests to an Instance administrator. Only the Instance administrator can approve change requests or provision new workspaces.



"Making a Service Request" and "Managing Requests"



3.14.2 About Specifying How Workspaces Are Created

The Instance administrator determines how the process of provisioning (or creating) a workspace works for a specific Oracle Application Express instance.

To determine how provisioning works, an Instance Administrator selects a Provisioning Method on the Instance Settings page:

- **Manual** An Instance administrator creates new workspaces and notifies the Workspace administrator regarding the Sign In credentials.
- **Request** Users request a workspace. Once an administrator approves the request, the user receives an email containing an email verification link. After the user clicks the email verification link, the workspace is created.
- Automatic Works similar to Request except requests are automatically approved with no administrator review required.

Note:

To enable users to request a workspace using a link on the Sign In page, the Instance administrator must choose either the Provisioning Method **Request** or **Automatic** and configure email. If the Provisioning Method is set to **Manual**, no link appears on the Sign In page.

About Request and Automatic Provisioning

If a workspace uses the Provisioning Methods **Request** or **Automatic**, the following events occur:

- 1. The user receives an email containing an email verification link.
- 2. When user clicks the verification link, the workspace is created.
- 3. The user receives another email containing Sign In credentials (that is, the workspace name, username, and password).
- 4. The status of the workspace request changes from Accepted to Approved.

See Also:

- "Disabling Email Provisioning"
- "Configuring Email"
- "Managing Requests"



3.14.3 Selecting a Workspace Provisioning Mode

An Instance Administrator selects a Provisioning Method to determine how workspace provisioning works.

To select a Provisioning Method:

- **1.** Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Instance.
- 3. Under Instance Settings, click Instance Settings.
- 4. Under Workspace Creation, select a Provisioning Method:
 - **Manual** An Instance administrator creates new workspaces and notifies the Workspace administrator regarding the Sign In credentials.
 - **Request** Users request a workspace. Once an administrator approves the request, the user receives an email containing an email verification link. After the user clicks the email verification link, the workspace is created.
 - Automatic Works similar to **Request** except requests are automatically approved with no administrator review required.

Note:

To enable users to request a workspace using a link on the Sign In page, the Instance administrator must choose either the Provisioning Method **Request** or **Automatic** and configure email. If the Provisioning Method is set to **Manual**, no link appears on the Sign In page.

- 5. If you select Request or Automatic, edit the following:
 - Require Verification Code Determines if a verification code displays and is required during the request process. Select Yes or No.
 - Notification Email Address Enter the email address to receive notification email messages for new workspace requests and change workspace requests. If not specified, no workspace request notification email messages is sent.
- 6. Click Apply Changes.

🖓 Tip:

If you select **Automatic**, you can disable workspace provisioning and send users a message. See "Disabling Email Provisioning."



See Also:

- "Configuring Email"
 - "Managing Requests"

3.14.4 How Oracle-Managed Files Effects Workspace Provisioning

When an Instance administrator creates a new workspace with a new schema, a new tablespace and data file are created for that schema. If Oracle-Managed Files is enabled, it manages the data file for the new tablespace.

Using Oracle-managed files simplifies the administration of the Oracle database and eliminates the need for the database administrator (DBA) to directly manage the operating system files that comprise the database. Using Oracle-managed files, the DBA specifies operations in terms of database objects rather than file names. The data file for the new tablespaces are named according to the Oracle-managed files conventions. The placement of these files is determined by the database initialization parameter DB_CREATE_FILE_DEST.

If the Oracle-Managed Files is not enabled, the data file is created in the same directory as the first data file of the tablespace in which Oracle Application Express is installed.

See Also:

"Using Oracle Managed Files" in Oracle Database Administrator's Guide

3.14.5 Creating a Workspace Manually

Instance administrators can provision a workspace manually in either a full development environment or a runtime environment.

- Creating Workspace Manually in a Full Development Environment Instance administrators can create workspaces manually in a full development environment by running the Create Workspace Wizard.
- Creating a Workspace Manually in a Runtime Environment Instance administrators can create workspaces manually in a runtime environment starting SQL*Plus and running the following SQL statements.

3.14.5.1 Creating Workspace Manually in a Full Development Environment

Instance administrators can create workspaces manually in a full development environment by running the Create Workspace Wizard.

To create a workspace manually:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Workspaces.



3. Under Workspace Actions, click Create Workspace.

The Create Workspace Wizard appears.

- 4. For Identify Workspace:
 - a. Workspace Name Enter a unique workspace name.
 - b. Workspace ID Leave Workspace ID blank to have the new Workspace ID automatically generated. A Workspace ID must be a positive integer greater than 100000.
 - c. Workspace Description Enter a workspace description.
 - d. Click Next.
- 5. For Identify Schema, specify whether you are re-using an existing schema or creating a new one.

If you are using an existing schema:

- a. Re-use existing schema Select Yes.
- b. Schema Name Select a schema from the list.
- c. Inspect the information in the report **Information on Schema**. If the report shows **Suggested Additional Privileges**, consider granting these privileges to the schema, to avoid privilege errors when using it as an application parsing schema.
- d. Click Next.

If you are creating a new schema:

- a. Re-use existing schema Select No.
- b. Schema Name Select a schema from the list.
- c. Schema Password Enter a password.
- d. Space Quota (MB) If creating a new schema, select the maximum size of the tablespace to be associated with that schema. You can adjust this limit later.
- e. Click Next.
- 6. For Identify Administrator, enter the Workspace administrator information and click **Next**.
- 7. Confirm your selections and click **Create Workspace**.

3.14.5.2 Creating a Workspace Manually in a Runtime Environment

Instance administrators can create workspaces manually in a runtime environment starting SQL*Plus and running the following SQL statements.

To add a workspace in a runtime environment:

- 1. Start SQL*Plus and connect to the database where Oracle Application Express is installed as SYS. For example:
 - On Windows:

SYSTEM_DRIVE:\ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

On UNIX and Linux:



```
$ sqlplus /nolog
SQL> CONNECT SYS as SYSDBA
Enter password: SYS_password
```

2. Run the following statement:

```
ALTER SESSION SET CURRENT_SCHEMA = APEX_190200
```

3. The following example demonstrates how to use the ADD_WORKSPACE procedure to add a new workspace named MY_WORKSPACE using the primary schema, SCOTT, along with additional schema mappings for HR and OE.

```
BEGIN
APEX_INSTANCE_ADMIN.ADD_WORKSPACE (
    p_workspace_id => 8675309,
    p_workspace => 'MY_WORKSPACE',
    p_primary_schema => 'SCOTT',
    p_additional_schemas => 'SCOTT' );
END;
```

See Also:

"ADD_WORKSPACE Procedure" in Oracle Application Express API Reference

3.14.6 Creating Multiple Workspaces

Provision multiple workspaces by running the Create Multiple Workspaces Wizard

To create multiple workspaces:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Workspaces.
- 3. Under Workspace Actions, click **Create Multiple Workspaces**. The Create Multiple Workspaces Wizard appears.
- 4. For Provision Workspace Using:
 - System Generated Workspace Names
 - Statically Prefixed Workspace Name with Sequential Integer Suffix
 - Email Domain Name as Workspace Name, with Sequential Integer Suffix for duplicates

What displays next depends upon the option you select.

🚫 Tip:

To learn more about a specific field, see field-level Help.

- 5. If you select System Generated Workspace Names, specify the following:
 - a. Workspace Count



- b. Install Sample Application
- c. Install Sample Websheet
- d. Install Sample EMP and DEPT Tables
- e. Space Quota (MB)
- f. Resource Manager Consumer Group
- g. Allow workspaces to be automatically purged
- h. Workspace Description
- 6. If you select Statically Prefixed Workspace Name with Sequential Integer Suffix, specify the following:
 - a. Workspace Prefix
 - **b.** Workspace Count
 - c. Install Sample Application
 - d. Install Sample Websheet
 - e. Install Sample EMP and DEPT Tables
 - f. Space Quota (MB)
 - g. Resource Manager Consumer Group
 - h. Allow workspaces to be automatically purged
 - i. Workspace Description
- 7. If you select Email Domain Name as Workspace Name, with Sequential Integer Suffix for duplicates, specify the following:
 - a. Install Sample Application
 - b. Install Sample Websheet
 - c. Install Sample EMP and DEPT Tables
 - d. Space Quota (MB)
 - e. Resource Manager Consumer Group
 - f. Allow workspaces to be automatically purged
 - g. Email Addresses (cut and paste any text that contains email addresses)(Value Required)
 - h. Workspace Description
- 8. Click Next.
- 9. Confirm your choices and click Provision Workspaces.

3.15 Managing Existing Workspaces

Instance administrators can manage existing workspaces within an Oracle Application Express instance.

Viewing Existing Workspace Information

Use the Existing Workspaces report to view an interactive report of existing workspaces. From the Existing Workspaces report, you can view or edit workspace details.



- Viewing the Application Attributes Report
 View applications by workspace on the Application Attributes page.
- Deleting a Workspace
 Deleting a workspace does not remove any of the associated database objects. To
 remove the associated schemas, a database administrator (DBA) must use a
 standard database administration tool, such as Oracle Enterprise Manager or
 SQL*Plus.
- Locking a Workspace

Instance administrators can lock a workspace to address security or performance issues.

Managing Workspace to Schema Assignments Instance administrators can view, edit, and remove schema and workspace assignment, associate additional schemas with a workspace, and create new schemas.

 Managing Component Availability for an Instance
 Control which components are available within an Oracle Application Express instance, including App Builder, SQL Workshop, PL/SQL Editing in SQL
 Workshop, Team Development, or installation of productivity and sample applications.

- Performing a Workspace Search Perform a workspace search by clicking Find a Workspace on the Workspace Tasks page.
- Isolating a Workspace to Prevent Browser Attacks Instance administrators can configure limits to isolate a workspace and prevent browser attacks.
- Viewing the Workspace Details Report
 View workspace information by viewing the Workspace Details Report.
- Viewing Workspace Database Privileges View a summary of workspace database privileges on the Workspace Database Privileges page.
- Viewing File Size and File Count by Workspace View total file size and file count by workspace on the File Utilization by Workspace page.
- Finding and Emailing Workspace Summary View total file size and file count by workspace on the File Utilization by Workspace page.
- Accessing the Data Dictionary Cache Report from Administration Services Access the Data Dictionary Cache report from Administration Services to view statistics and data analysis of all workspace schema tables and caches in an instance.
- Exporting and Importing a Workspace Move a workspace and all associated users to a new Oracle Application Express instance by exporting and importing.
- Exporting Workspaces, Apps, and Related Files from a Command-line Export workspaces, applications, and related files from a command-line using the APEXExport utility.
- Changing Application Build Status in Administration Services An Instance administrator can change the build status of an application.



Viewing the Parsing Schemas Report

Use the Parsing Schemas report to identify the current parsing schema of each application in any workspace.

See Also:

- "Creating Workspaces in Administration Services"
- "Managing Schemas"
- "Managing Users Across an Application Express Instance"
- "Monitoring Activity Across a Development Instance"

3.15.1 Viewing Existing Workspace Information

Use the Existing Workspaces report to view an interactive report of existing workspaces. From the Existing Workspaces report, you can view or edit workspace details.

To view and edit existing workspaces:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Workspaces.
- 3. Under Workspace Reports, click Existing Workspaces.

The Existing Workspaces page appears

4. To edit a workspace, click the workspace name.

The Edit Workspace Information page appears.



"Isolating a Workspace to Prevent Browser Attacks" and "Viewing the Workspace Details Report"

3.15.2 Viewing the Application Attributes Report

View applications by workspace on the Application Attributes page.

Application Attributes page is an interactive report that displays application by workspace and includes the following columns: Parsing Schema, Application Name, Pages, Language, Logging, Build Status, Application Status, and Alias.

- 1. To view the Application Attributes page:
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Workspaces.
- 3. Under Manage Applications, click Application Attributes.

The Application Attributes page appears.



4. To customize the report, use the Search bar at the top of the page.

3.15.3 Deleting a Workspace

Deleting a workspace does not remove any of the associated database objects. To remove the associated schemas, a database administrator (DBA) must use a standard database administration tool, such as Oracle Enterprise Manager or SQL*Plus.

- Identifying and Deleting Inactive Workspaces
 Learn how to identify and delete inactive workspaces.
- Deleting Workspaces in a Full Development Environment Delete workspaces in a full development environment.
- Deleting Workspaces in a Runtime Development Environment Delete workspaces in a runtime development environment.

See Also: "Viewing the Workspace Details Report" and "Creating Workspaces in Administration Services"

3.15.3.1 Identifying and Deleting Inactive Workspaces

Learn how to identify and delete inactive workspaces.

- How to Identify Inactive Workspaces
- Identifying Inactive Workspaces By Checking Recent Updates
- Viewing Workspaces with Only a Sample Application
- Removing the Resources Associated with Inactive Workspaces
- Deleting Inactive Workspaces

3.15.3.1.1 How to Identify Inactive Workspaces

If you are managing a large hosted Oracle Application Express instance, manually deleting inactive workspaces can free up resources for other users. The process of manually deleting inactive workspaces consists of the following steps:

- Step 1: Identify inactive workspaces. See "Identifying Inactive Workspaces By Checking Recent Updates" and "Viewing Workspaces with Only a Sample Application."
- Step 2: Remove the resources (that is, the database schemas, tablespaces, and data files) associated with each inactive workspace. See "Removing the Resources Associated with Inactive Workspaces."
- Step 3: Drop the inactive workspaces from Oracle Application Express. See "Deleting Inactive Workspaces."



Tip:

To systematically purge inactive workspaces you must configure Workspace Purge settings. See "Purging Inactive Workspaces."

3.15.3.1.2 Identifying Inactive Workspaces By Checking Recent Updates

The first step in determining if a workspace is inactive is to establish some basic rules. A common approach is to base the rules on the Oracle Application Express activity records found in the current Application Express engine schema.



The following DDL (data definition language) creates a table of all workspaces requested before June 28, 2004 but that have been inactive since June 10, 2004. In this example, inactivity is determined by checking a key within the Application Express engine schema for the most recent updates by each workspace.

```
ALTER SESSION SET CURRENT_SCHEMA = APEX_18100;
CREATE TABLE ws_to_purge AS
SELECT c.security_group_id, c.company_name, c.admin_email, c.request_date,
SYSDATE last_updated_on, 'Y' ok_to_delete
  FROM wwv_flow_provision_company c
 WHERE
c.request_date <= to_date('20040628','YYYYMMDD') AND</pre>
    ( not exists
 (SELECT NULL /* Activity Log */
       FROM wwv_flow_activity_log l
      WHERE l.security_group_id = c.security_group_id
         AND l.time_stamp > to_date('20040610','YYYYMMDD'))
 )
    AND NOT EXISTS
     (SELECT NULL /* workspace applications */
       FROM wwv_flows f
      WHERE f.security_group_id = c.security_group_id
        AND f.last_updated_on > to_date('20040610','YYYYMMDD'))
   AND NOT EXISTS
     (SELECT NULL /* Pages */
       FROM wwv_flow_steps s
       WHERE s.security_group_id = c.security_group_id
         AND s.last_updated_on > to_date('20040610','YYYYMMDD'))
    AND NOT EXISTS
     (SELECT NULL /* Regions */
       FROM wwv_flow_page_plugs p
       WHERE p.security_group_id = c.security_group_id
         AND p.last_updated_on > to_date('20040610','YYYYMMDD'))
    AND NOT EXISTS
     (SELECT NULL /* Items */
       FROM wwv_flow_step_items i
       WHERE i.security_group_id = c.security_group_id
         AND i.last_updated_on > to_date('20040610','YYYYMMDD'))
    AND NOT EXISTS
```

```
(SELECT NULL /* Templates */
FROM wwv_flow_templates t
WHERE t.security_group_id = c.security_group_id
AND t.last_updated_on > to_date('20040610','YYYYMMDD'))
AND NOT EXISTS
(SELECT NULL /* Files uploaded */
FROM wwv_flow_file_objects$ o
WHERE o.security_group_id = c.security_group_id
AND o.created_on > to_date('20040610','YYYYMMDD'))
AND NOT EXISTS
(SELECT NULL /* SQL Workshop history */
FROM wwv_flow_sw_sql_cmds s
WHERE s.security_group_id = c.security_group_id
AND s.created_on > to_date('20040610','YYYYMMDD'));
```

3.15.3.1.3 Viewing Workspaces with Only a Sample Application

Another way to identify potentially inactive workspaces is to view the Workspaces with Only Sample Application report.

To view a report or workspaces only containing only a sample application:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Workspaces.
- 3. Under Workspace Reports, click Workspaces with Only Sample Application.

The Workspaces with Only Sample Applications page appears.

This page displays as an interactive report. To customize the report, use the Search bar at the top of the page.

3.15.3.1.4 Removing the Resources Associated with Inactive Workspaces

After you have identified inactive workspaces in a single table, the next step is to remove them.

Note: Before removing the schemas, tablespaces, or data files associated with inactive workspaces, make sure these resources are not being used in any other workspace or application. To remove the resources associated with inactive workspaces: Identify the schemas used by the workspaces to be deleted by joining the table containing the identified inactive workspaces to wwv_flow_company_schemas. Drop the schemas, tablespaces, and data files used exclusively by the inactive workspaces from the database. You can identify the schemas to drop by running a query similar to the following:

```
SELECT s.schema
FROM ws_to_purge ws,
    wwv_flow_company_schemas s
WHERE s.security_group_id = ws.security_group_id
AND ws.ok_to_delete = 'Y';
```

3.15.3.1.5 Deleting Inactive Workspaces

Once you remove the resources associated with an inactive workspace, you can delete the workspace. You can delete inactive workspaces manually using the Oracle Application Express Administration Services application. Or, you can delete them programmatically as shown in the following PL/SQL example.

3.15.3.2 Deleting Workspaces in a Full Development Environment

Delete workspaces in a full development environment.

To delete a workspace:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Workspaces.
- 3. Under Workspace Reports, click Existing Workspaces.

The Existing Workspaces page appears.

- 4. Under the Action column, click **Delete**.
- 5. On Verify Applications:
 - a. Review the workspace name and the number of applications and users.
 - b. Select Check to confirm that you wish to proceed with the removal.
 - c. Click Next.
- 6. Confirm the displayed information and click Remove Workspace.

3.15.3.3 Deleting Workspaces in a Runtime Development Environment

Delete workspaces in a runtime development environment.

To delete a workspace in a runtime development environment:

- 1. Start SQL*Plus and connect to the database where Oracle Application Express is installed as SYS. For example:
 - On Windows:

SYSTEM_DRIVE:\ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

• On UNIX and Linux:

\$ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password



2. Run the following statement:

ALTER SESSION SET CURRENT_SCHEMA = APEX_190200

3. Run the following statement:

```
BEGIN
```

APEX_INSTANCE_ADMIN.REMOVE_WORKSPACE(WORKSPACE_NAME, DROP_USER, DROP_TABLESPACE) END;

Where:

- WORKSPACE_NAME is the name of the workspace.
- DROP_USER is either Y or N. The default is N.
- DROP_TABLESPACE is either Y or N. The default is N.

3.15.4 Locking a Workspace

Instance administrators can lock a workspace to address security or performance issues.

Locking a workspace immediately locks all workspace administrator, developer, and user accounts in the workspace. It also changes the status of all applications in the workspace to Unavailable.

Warning: Locking a workspace makes it permanently inaccessible.

To lock a workspace:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Workspaces.
- 3. Under Workspace Actions, click Lock Workspace.
- 4. For Workspace, select the workspace you want to lock and click Next.
- 5. Review the information about applications and users and click Lock Workspace.

3.15.5 Managing Workspace to Schema Assignments

Instance administrators can view, edit, and remove schema and workspace assignment, associate additional schemas with a workspace, and create new schemas.

When users sign in to Oracle Application Express, they access a shared work area called a workspace. Each workspace can have multiple associated (or mapped) schemas. By associating a workspace with a schema, developers in that workspace can create new database objects in that schema and build applications that interact with the database objects in that schema.



- Viewing Schema and Workspace Assignments in a Development Environment View an existing schema to workspace assignments in a full development environment.
- Viewing Schema and Workspace Assignments in a Runtime Environment View the existing schema to workspace assignments in a runtime environment.
- Editing Existing Schema and Workspace Assignments Edit existing schema and workspace assignments.
- Associating Schemas in a Full Development Environment Associate existing or new schemas with a workspace on the Manage Workspace to Schema Assignments page.
- Associating Additional Schemas in a Runtime Environment Associate additional schemas with a workspace in a runtime environment.
- Removing a Schema Mapping from a Workspace in a Runtime Environment Remove a schema mapping from a workspace in a runtime environment.

See Also:

"Managing Schemas" and "Viewing the Parsing Schemas Report"

3.15.5.1 Viewing Schema and Workspace Assignments in a Development Environment

View an existing schema to workspace assignments in a full development environment.

To view an existing schema to workspace assignment:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Workspaces.
- 3. Under Workspace Actions, click Manage Workspace to Schema Assignments.

The Manage Workspace to Schema Assignments page appears, listing all workspaces in your environment along with their associated schemas.

This page displays as an interactive report. To customize the report, use the Search bar at the top of the page.

3.15.5.2 Viewing Schema and Workspace Assignments in a Runtime Environment

View the existing schema to workspace assignments in a runtime environment.

To view the existing schema to workspace assignment in a runtime environment:

- 1. Start SQL*Plus and connect to the database where Oracle Application Express is installed as SYS. For example:
 - On Windows:



SYSTEM_DRIVE:\ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

On UNIX and Linux:

\$ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

2. Run the following statement:

ALTER SESSION SET CURRENT_SCHEMA = APEX_190200

3. Run the following statement:

SELECT APEX_INSTANCE_ADMIN.GET_SCHEMAS(WORKSPACE_NAME)
FROM DUAL;

Where WORKSPACE_NAME is the name of the workspace.

3.15.5.3 Editing Existing Schema and Workspace Assignments

Edit existing schema and workspace assignments.

To edit an existing schema and workspace assignment:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Workspaces.
- 3. Under Workspace Actions, click Manage Workspace to Schema Assignments The Manage Workspace to Schema Assignments page appears.
- 4. To edit an existing workspace to schema assignment:
 - a. Select the workspace name.
 - b. Select a new workspace or database schema.
 - c. Click Apply Changes.

3.15.5.4 Associating Schemas in a Full Development Environment

Associate existing or new schemas with a workspace on the Manage Workspace to Schema Assignments page.

To associate a schemas with a workspace:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Workspaces.
- 3. Under Workspace Actions, click Manage Workspace to Schema Assignments. The Manage Workspace to Schema Assignments page appears.
- 4. Click Add Schema.

The Add Schema wizard appears.

5. The schema is a - Select Existing or New.

The options that display next differ depending upon your selection.

6. If you select Existing:



- a. Workspace Enter the name of the workspace, or select one from the list.
- b. Schema Enter new schema name.
- c. Click Next.
- 7. If you select New:
 - a. Workspace Enter the name of the workspace, or select one from the list.
 - b. Schema Enter new schema name.
 - c. Password Enter a password for schema.
 - d. Default Tablespace Enter the default tablespace for the provisioned schema, or select one from the list.
 - e. Temporary Tablespace Enter the temporary tablespace for the provisioned schema, or select one from the list.
 - f. Click Next.
- 8. Review your selections and click Add Schema.

3.15.5.5 Associating Additional Schemas in a Runtime Environment

Associate additional schemas with a workspace in a runtime environment.

To associate additional schemas with a workspace in a runtime environment:

- 1. Start SQL*Plus and connect to the database where Oracle Application Express is installed as SYS. For example:
 - On Windows:

SYSTEM_DRIVE:\ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

On UNIX and Linux:

\$ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

2. Run the following statement:

ALTER SESSION SET CURRENT_SCHEMA = APEX_190200

3. Run the following statement:

```
BEGIN
APEX_INSTANCE_ADMIN.ADD_SCHEMA(WORKSPACE_NAME, SCHEMA_NAME)
END;
```

Where:

- WORKSPACE_NAME is the name of the workspace.
- SCHEMA_NAME is the name of the schema.



3.15.5.6 Removing a Schema Mapping from a Workspace in a Runtime Environment

Remove a schema mapping from a workspace in a runtime environment.

To remove a schema mapping from a workspace in a runtime environment:

- 1. Start SQL*Plus and connect to the database where Oracle Application Express is installed as SYS. For example:
 - On Windows:

SYSTEM_DRIVE:\ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

On UNIX and Linux:

\$ sqlplus /nolog SQL> CONNECT SYS as SYSDBA Enter password: SYS_password

2. Run the following statement:

ALTER SESSION SET CURRENT_SCHEMA = APEX_200100

3. Run the following statement:

```
BEGIN
APEX_INSTANCE_ADMIN.REMOVE_SCHEMA(WORKSPACE_NAME, SCHEMA_NAME)
END;
```

Where:

- WORKSPACE_NAME is the name of the workspace.
- SCHEMA_NAME is the name of the schema.

3.15.6 Managing Component Availability for an Instance

Control which components are available within an Oracle Application Express instance, including App Builder, SQL Workshop, PL/SQL Editing in SQL Workshop, Team Development, or installation of productivity and sample applications.

To configure component availability:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Workspaces.
- 3. Under Workspace Actions, click Manage Component Availability.

The Component Availability page appears. To customize the report, use the Actions menu at the top of the page.

- 4. Locate the workspace for which you want to enable or disable components.
- 5. Click the workspace name.

The Workspace Settings page appears.

6. Under Workspace Settings, select **Yes** to enable a component or **No** to disable it. Options include:



- Enable App Builder Determines the availability of App Builder in this workspace.
- Enable SQL Workshop Determines the availability of SQL Workshop in this workspace.
- Allow PL/SQL Editing in SQL Workshop Allow PL/SQL procedures, packages, functions, and triggers to be edited in the browser.
- Enable Team Development Determines the availability of Team Development in this workspace.
- Enable Productivity and Sample Application Installation Controls the ability to install productivity and sample applications in the current workspace.
- 7. Click Apply Changes.

See Also:
"Configuring Workspace Preferences"

3.15.7 Performing a Workspace Search

Perform a workspace search by clicking Find a Workspace on the Workspace Tasks page.

To perform a workspace search:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Under Workspace Tasks, click Find a Workspace.

The Workspace Search page appears. To customize the report, use the Search bar at the top of the page.

3. To view workspace details, click a workspace name.

The Workspace Details report appears.

4. To email the report to other users, click **Email** and follow the on-screen instructions.



3.15.8 Isolating a Workspace to Prevent Browser Attacks

Instance administrators can configure limits to isolate a workspace and prevent browser attacks.

• About Isolating a Workspace to Prevent Browser Attacks Isolating workspaces is an effective approach to preventing browser attacks.



• Configuring Workspace Isolation Attributes Configure Workspace Isolation attributes.

See Also:

- "Isolating All Workspaces in an Instance"
- "About Isolating Workspaces" in Oracle Application Express App Builder User's Guide

3.15.8.1 About Isolating a Workspace to Prevent Browser Attacks

Isolating workspaces is an effective approach to preventing browser attacks.

The only way to truly isolate a workspace is to enforce different domains in the URL by configuring the Allow Hostnames attribute. When the URLs of the attacker and the victim have different domains and hostnames, the browser's same-origin policy prevents attacks.

3.15.8.2 Configuring Workspace Isolation Attributes

Configure Workspace Isolation attributes.

To configure Workspace Isolation attributes:

- **1.** View the existing workspace:
 - a. Sign in to Oracle Application Express Administration Services.
 - b. Click Manage Workspaces.
 - c. Under Workspace Reports, click Existing Workspaces.
 - d. Click a workspace name.

The Edit Information page appears.

2. Locate Workspace Isolation and edit the attributes as described in the following table.

Tip:

To learn more about an attribute and view examples, see field-level Help.



Attribute	Description
Allow Hostnames	Enter a comma separated list of hostnames that can be used to access this workspace. If you leave this attribute empty, the instance-level value applies. If you enter one or more hostnames, the incoming HTTP request URL's hostname part must match one of the listed hostnames.
	To learn more, see field-level Help.
Resource Consumer Group	Specify the Database Resource Manager consumer group to be used for all page events associated with this workspace. If you leave this attribute empty, the instance- level value applies. At the beginning of every request, the Application Express engine switches the current consumer group of the current database session to the workspace's consumer group. This applies to both executing application and any of the applications used within the Application Express development environment.
	The privilege to switch to this consumer group must be granted to either PUBLIC or the Application Express schema. This privilege is typically granted using the procedure DBMS_RESOURCE_MANAGER_PRIVS.GRANT_SWITCH_CONS MER GROUP.
Maximum Concurrent Workspace Requests	Enter the maximum number of concurrent page events tha Oracle Application Express supports for all applications of this workspace. If you leave this attribute empty, the instance-level value applies. Instead of processing a page event, Application Express shows an error message when the limit is already reached.
	Application Express keeps track of session requests by querying the CLIENT_INFO column of GV\$SESSION. This tracking will not work if developers overwrite CLIENT_INFO e.g. with a call to DBMS_APPLICATION_INFO.SET_CLIENT_INFO.
Maximum Concurrent Session Requests	Enter the maximum number of concurrent page events tha Oracle Application Express supports for each session of th workspace's applications. Instead of processing a new page event, Application Express shows an error message when the limit is already reached. Alternatively, use the Concurrent Session Requests Kill Timeout attribute to kill a active database session, to process the new page event.
	Application Express keeps track of session requests by querying the CLIENT_IDENTIFIER column of GV\$SESSION This tracking will not work if developers overwrite CLIENT_IDENTIFIER, for example with a call to DBMS_SESSION.SET_IDENTIFIER.

 Table 3-5
 Workspace Isolation Attributes



Attribute	Description
Concurrent Session Requests Kill Timeout	If a new page event comes in that is outside the limits of Maximum Concurrent Session Requests , Application Express can execute alter system kill session on the oldest active database session which processes another page event for this Application Express session. This attribute specifies the number of seconds a database process has to be active, before it can be killed. If you leave this attribute empty, the instance-level value applies. Warning : Killing sessions can cause problems with the application server's database session pool.
Maximum Size of Files in Workspace	Enter the total size (in bytes) of all files that can be uploaded to this workspace.
Maximum Email Messages	Enter the maximum number of email messages that can be sent with the APEX_MAIL API per 24 hour period. This value overrides the instance-level setting.
Maximum Web Service Requests	Enter the maximum number of web service requests that can be sent per 24 hour period.
Content Cache target size	Denotes the target size for the content cache on workspace level.
	This value overrides the instance-level setting.
Content Cache maximum entry size	Denotes the maximum size for content to be placed into the content cache.
	This value overrides the instance-level setting.

Table 3-5 (Cont.) Workspace Isolation Attributes

3. Click Apply Changes.

3.15.9 Viewing the Workspace Details Report

View workspace information by viewing the Workspace Details Report.

To view the Workspace Details report:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Workspaces.
- 3. Under Workspace Reports, click Workspace Details.

The Workspace Details page appears.

- 4. Configure the report:
 - a. From the Workspace list, select a workspace.
 - **b.** From the Reporting Period list, select a period.
 - c. Click Set.

The Workspace Details report page appears. The following buttons display at the top of the report:

- **Remove** Removes the current workspace.
- Manage Users Edit or create new users.



• Email - Send this report by email.

The Workspace Details report is divided into the following major sections:

- Workspace Displays high-level information about selected workspace.
- Workspace Schemas Displays the schema name, and default tablespace, privileges granted, and database role privileges.

When users sign in to Oracle Application Express, they sign in to a shared work area called a workspace. Each workspace can have multiple associated schemas. By associating a workspace with a schema, developers can build applications that interact with the objects in that schema and create new database objects in that schema.

- **Database Applications** Lists details about the database applications within the workspace.
- Websheet Applications Lists details about the Websheets within the workspace.
- Productivity and Sample Apps Lists productivity and sample applications within the workspace.
- SQL Workshop Lists the number of SQL scripts, SQL script results, and SQL Command history.
- **Team Development** Lists the number of labels, milestones, issues, attachments, and feedback entries.
- Workspace Application Activity Summary Details statistics about workspace applications.

Other sections include:

- 5 Most Active Applications
- Developer Activity Summary
- Database Object Counts by Object Type
- 5 Top Tables by Row Count, Reported by Schema
- 5. From the Reporting Period list, select a period and click **Set**.

Note:

- "Isolating a Workspace to Prevent Browser Attacks"
- "Managing Schemas"
- "Managing Users Across an Application Express Instance"
- "Managing Schemas"

3.15.10 Viewing Workspace Database Privileges

View a summary of workspace database privileges on the Workspace Database Privileges page.

To view workspace database privileges:



- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Workspaces.
- 3. Under Workspace Reports, click Workspace Database Privileges.

The Workspace Database Privileges page appears. This page displays as an interactive report. To customize the report, use the Search bar at the top of the page

4. To view workspace details, click the workspace name.

The Workspace Summary report appears.

See Also:

"Viewing the Workspace Details Report"

3.15.11 Viewing File Size and File Count by Workspace

View total file size and file count by workspace on the File Utilization by Workspace page.

To view total file size and file count by workspace:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Workspaces.
- 3. Under Workspace Reports, click Manage File Utilization.

The File Utilization by Workspace page appears. This page displays as an interactive report.

4. To customize the report, use the Search bar at the top of the page.

3.15.12 Finding and Emailing Workspace Summary

View total file size and file count by workspace on the File Utilization by Workspace page.

To find and email workspace summary:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Workspaces.
- 3. Under Workspace Reports, click Find and Email Workspace Summary.

The Workspace Search page appears. This page displays as an interactive report.

- 4. To view workspace details, click the workspace name. The Workspace Summary report appears.
- 5. Click Email.

The Email page appears.

6. Enter content in the **Body** field.



7. Click Email.

3.15.13 Accessing the Data Dictionary Cache Report from Administration Services

Access the Data Dictionary Cache report from Administration Services to view statistics and data analysis of all workspace schema tables and caches in an instance.

• Viewing or Refreshing the Data Dictionary Cache View or refresh the Data Dictionary Cache.

See Also:

"Accessing the Data Dictionary Cache Report from Workspace Administration"

3.15.13.1 Viewing or Refreshing the Data Dictionary Cache

View or refresh the Data Dictionary Cache.

The Create Application Wizard and Create Page Wizard use this information when creating new applications and pages. If the tables change due to DDL or DML modifications, the Oracle Application Express nightly job ORACLE_APEX_DICTIONARY_CACHE refreshes the Data Dictionary Cache. If the Data Dictionary Cache is incorrect or out of date, you can update the cache manually by clicking **Gather Statistics and Refresh Cache** or **Refresh Cache Only**.

- 1. To view or refresh the Data Dictionary Cache:
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Workspaces.
- 3. Under Workspace Reports, click Data Dictionary Cache.

The Data Dictionary Cache page appears listing the workspace, cached objects, schema count, last data definition, last dictionary cache, and workspace ID

- 4. To view cache for a workspace:
 - a. Click the workspace name.

The Workspace Cache report appears.

- b. To refresh the cache manually click either Gather Statistics and Refresh Cache or Refresh Cache Only.
- 5. To view cache for table:
 - a. Click the table name.

The Table Column Cache report appears. The **Facets Search Score** and **Facet Display** columns indicate how the Create Application Wizard and Create Page Wizard will render facets when creating a Faceted Search page.

b. To refresh the cache manually click either Gather Statistics and Refresh Cache or Refresh Cache Only.

ORACLE

See Also: "List of DBMS_SCHEDULER Jobs"

3.15.14 Exporting and Importing a Workspace

Move a workspace and all associated users to a new Oracle Application Express instance by exporting and importing.

- About Exporting and Importing a Workspace
 To move a workspace and all associated users to a new Oracle Application
 Express instance, you export the workspace.
- Exporting a Workspace in Administration Services Create a Workspace Export by navigating to Manage Workspaces and selecting Export Workspace.
- Importing a Workspace in Administration Services Import a Workspace Export by navigating to Manage Workspaces and selecting Import Workspace.

See Also:

- "Deploying an Application" in Oracle Application Express App Builder User's Guide
- Life Cycle Management with Oracle Application Express

3.15.14.1 About Exporting and Importing a Workspace

To move a workspace and all associated users to a new Oracle Application Express instance, you export the workspace.

When you export a workspace, Oracle Application Express generates a text file. This file contains information about your workspace, all the users in your workspace, and any groups in your workspace (if applicable). You can import this file into another Oracle Application Express instance.

Exporting a workspace and importing it into a new database instance enables developers to import application components. When building new environments (for example, moving from development to testing or testing to production), Oracle recommends creating workspaces by importing them.

Keep in mind, this method only imports the workspace, users, and groups. This file does not contain:

- The schemas associated with this workspace or the objects in those schemas.
- Any applications, images, cascading style sheets, and static text files.

These items must be exported separately.



See Also:

"Exporting an Application and Application Components" in *Oracle Application Express App Builder User's Guide*

3.15.14.2 Exporting a Workspace in Administration Services

Create a Workspace Export by navigating to Manage Workspaces and selecting Export Workspace.

- 1. To create a Workspace Export:
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Workspaces.
- 3. Under Export Import, click Export Workspace.

\frown	_		
()	- T	In	
\mathbf{N}		IN	١.

To view a list of existing Workspace Imports, click **View Imported Workspace Export Files** under **Tasks**.

- 4. Select a workspace and then click Export Workspace.
- 5. On Export Workspace:
 - a. Include Team Development Set to Yes to include Team Development data. Otherwise, select No.
 - b. Export Type:
 - **Minimal** In most cases, accept the default value **Minimal**. **Minimal** includes the Workspace meta data, User Groups, and User definitions.
 - Full Select Full to replicate to another instance all workspace artifacts including SQL Scripts, SQL Command History, saved SQL, user preferences, developer login history, email logs, and user interface defaults.
 - c. File Character Set Identifies the specified character set the for export file. When importing this file, you will need to specify the same character set.
- 6. To export the selected workspace, click **Save File**.

3.15.14.3 Importing a Workspace in Administration Services

Import a Workspace Export by navigating to Manage Workspaces and selecting Import Workspace.

- 1. To import a Workspace Export:
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Workspaces.
- 3. Under Export Import, click Import Workspace.



🔿 Tip:

To view a list of existing Workspace Imports, click **View Imported Workspace Export Files** under **Tasks**.

- 4. Locate the import file and click Next.
- 5. To install the workspace, click **Install**.
- 6. Follow the on-screen instructions.

3.15.15 Exporting Workspaces, Apps, and Related Files from a Command-line

Export workspaces, applications, and related files from a command-line using the APEXExport utility.

	💡 Тір:
	To review recommendations about optimizing the development and deployment of Application Express applications, see "Life Cycle Management with Oracle Application Express.".
	To review a tutorial that demonstrates deployment options, go to the Oracle Online Learning Library at http://www.oracle.com/oll/apex and search for Advanced Deployment of Your Application.
•	About APEXExport Learn about the APEXExport utility.
•	 Using APEXExport Use the APEXExport program to export workspaces, applications, and related files from a command-line. Use the -split option to export files into separate SQL scripts.
	See Also:

"Deploying an Application" in *Oracle Application Express App Builder User's Guide*

3.15.15.1 About APEXExport

Learn about the APEXExport utility.

Program Requirements

The APEXExport program requires:

JDK (Java Development Kit) release 1.6 or higher



• Oracle JDBC class libraries must be in your CLASSPATH

About APEXExport

APEXExport is a command-line utility for exporting workspaces, applications, and related files. Use the -split option to export files into separate files. Splitting application, page, and component exports into separate SQL files enables you to manage just the files with changes instead of exporting, inporting, and installing entire applications.

The **Export as Zip** option in the App Builder enables you to create an archive with the same directory structure and files as using the -split option.

See Also:

"Splitting Export Files into Separate Scripts" and "Directory Structure When Splitting Export Files into Separate Scripts" in *Oracle Application Express App Builder User's Guide*

3.15.15.2 Using APEXExport

Use the APEXExport program to export workspaces, applications, and related files from a command-line. Use the -split option to export files into separate SQL scripts.

- **1.** To use APEXExport:
- **1.** Set the CLASSPATH.



If your NLS character set is not one of US7ASCII, WE8DEC, WE8ISO8859P1,WE8MSWIN1252 or UTF8, you must also include orai18n.jar from the samedirectory path in the CLASSPATH.

For example:

- On UNIX and Linux:
 - Issue the command:

export CLASSPATH=.:\${ORACLE_HOME}/jdbc/lib/ojdbc6.jar

- From the apex/utilities directory, issue the command:

java oracle.apex.APEXExport

- On Windows:
 - From the Bash shell:

set CLASSPATH=%CLASSPATH%;.\;%ORACLE_HOME%\jdbc\lib\ojdbc6.jar

- From the apex/utilities directory, issue the command:

java oracle.apex.APEXExport



2. Returns the following output with both usage directions and examples.

```
Usage APEXExport -db -user -password -applicationid -workspaceid -
instance -expWorkspace -expMinimal -expFiles -skipExportDate
-expPubReports -expSavedReports -expIRNotif -expTranslations -
expTeamdevdata -expFeedback -deploymentSystem -expFeedbackSince
-expOriginalIds -debug -expNoSubscriptions -expComments -
expSupportingObjects -nochecksum -split
                        Database connect url in JDBC format
 -db:
 -user:
                        Database username
 -password:
                        Database password
 -applicationid:
                        ID for application to be exported
                        Workspace ID for which all applications to be
 -workspaceid:
exported or the workspace to be exported
 -instance:
                        Export all applications
 -expWorkspace:
                        Export workspace identified by -workspaceid or
all workspaces if -workspaceid not specified
                        Only export workspace definition, users, and
 -expMinimal:
groups
 -expFiles:
                        Export all workspace files identified by -
workspaceid
 -skipExportDate:
                        Exclude export date from application export
files
 -expPubReports:
                        Export all user saved public interactive reports
-expSavedReports:
                        Export all user saved interactive reports
-expIRNotif:
                        Export all interactive report notifications
 -expTranslations:
                        Export the translation mappings and all text
from the translation repository
                        Export team development feedback for all
 -expFeedback:
workspaces or identified by -workspaceid to development or deployment
 -expTeamdevdata:
                        Export team development data for all workspaces
or identified by -workspaceid
 -deploymentSystem:
                        Deployment system for exported feedback
 -expFeedbackSince:
                        Export team development feedback since date in
the format YYYYMMDD
 -expOriginalIds:
                        If specified, the application export will emit
ids as they were when the application was imported
                       Do not export references to subscribed
 -expNoSubscriptions:
components
 -expComments:
                        Export developer comments
 -expSupportingObjects: Pass (Y)es, (N)o or (I)nstall to override the
default
 -expACLAssignments:
                        Export ACL User Role Assignments
 -dir:
                        Save all files in the given directory, e.g. -
dir some/sub/directory
 -list:
                        List all changed applications in the workspace
or components in the application
 -changesSince:
                        Expects date parameter (yyyy-mm-dd). Limit -
list values to changes since the given date
 -changesBy:
                        Expects string parameter. Limit -list values to
changes by the given user
 -expComponents:
                        Export application components. All remaining
parameters must be of form TYPE:ID
 -debug:
                        Print debug output
 -nochecksum:
                        Overwrite existing files even if the contents
```

```
have not changed
                        Split applications into multiple files
 -split:
Application Example:
  APEXExport -db localhost:1521:ORCL -user scott -password
scotts_password -applicationid 31500
Workspace Example:
  APEXExport -db localhost:1521:ORCL -user scott -password
scotts_password -workspaceid 9999
Instance Example:
  APEXExport -db localhost:1521:ORCL -user system -password
systems_password -instance
Components Example:
  APEXExport -db localhost:1521:ORCL -user scott -password
scotts_password -applicationid 31500 -expComponents PAGE:1 PAGE:2
AUTHORIZATION:12345678
List Example:
  APEXExport -db localhost:1521:ORCL -user scott -password
scotts_password -workspaceid 9999 -list -changesSince 2019-07-29
  APEXExport -db localhost:1521:ORCL -user scott -password
scotts_password -applicationid 31500 -list -changesBy EXAMPLE_USER
Export All Workspaces Example:
  APEXExport -db localhost:1521:ORCL -user system -password
systems_password -expWorkspace
Export Feedback to development environment:
 APEXExport -db localhost:1521:ORCL -user scott -password
scotts_password -workspaceid 9999 -expFeedback
Export Feedback to deployment environment EA2 since 20100308:
 APEXExport -db localhost:1521:ORCL -user scott -password
scotts_password -workspaceid 9999 -expFeedback -deploymentSystem EA2 -
expFeedbackSince 20100308
```

3.15.16 Changing Application Build Status in Administration Services

An Instance administrator can change the build status of an application.

- About Changing Application Build Status
 Use the Build Status attribute to prevent an application from being modified by other developers.
- Changing Build Status in Administration Services Change a Build Status in Administration Services under Manage Workspaces, Manage Applications.

See Also:

"Managing Build Status in Workspace Administration"



3.15.16.1 About Changing Application Build Status

Use the Build Status attribute to prevent an application from being modified by other developers.

The Build Status attribute has two settings:

- Run and Build Application Developers can both run and edit an application.
- Run Application Only Developers can only run an application.

Setting the Build Status to **Run Application Only** is an effective way to prevent other developers from modifying it.

Ways to Modify Build Status

You can change the Build Status of an application as follows:

- **Application-level** Developers and administrators can change the Build Status attribute on the Edit Application page. See "Availability" in *Oracle Application Express App Builder User's Guide*.
- Workspace-level Workspace administrators can change the Build Status of applications within the current workspace on the Manage Application Build Status page. See "Changing Build Status for Multiple Applications."
- **Instance-level** -Instance administrators can change the Build Status of an application on the Build Status page as described in "Changing Build Status in Administration Services."

3.15.16.2 Changing Build Status in Administration Services

Change a Build Status in Administration Services under Manage Workspaces, Manage Applications.

To change a Build Status in Administration Services:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Workspaces.
- 3. Under Manage Applications, click Build Status.

The Build Status page appears. To customize the report, use the Search bar at the top of the page.

4. Click the **Edit** icon adjacent to the appropriate workspace.

The Edit Build Status page appears.

- 5. Select an alternate Build Status:.
 - **Run Application Only** Developers can only run an application. Application will not appear in the list of applications shown in the App Builder for the workspace.
 - Run and Build Application Developers can both run and edit an application. Application will appear in the App Builder's list of applications for the workspace.
- 6. Click Apply Changes.



Tip:

Note that if you select **Build Application Only** during deployment, the only way to change this setting is change it on the Build Status page in Oracle Application Express Administration Services.

3.15.17 Viewing the Parsing Schemas Report

Use the Parsing Schemas report to identify the current parsing schema of each application in any workspace.

The Parsing Schemas report identifies the Oracle database schema whose privileges are used when Application Express dynamically executes the application's SQL and PL/SQL code at runtime.

To view the Parsing Schemas report:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Workspaces.
- 3. Under Manage Applications, click Parsing Schemas.

The Parsing Schemas report appears. To customize the report, use the Search bar at the top of the page.

See Also:

"Managing Schemas" and "Managing Workspace to Schema Assignments"

3.16 Managing Users Across an Application Express Instance

An Instance administrator manages all user accounts within an Oracle Application Express instance on the Manage Developers and Users page.

- About the Advantages of Managing Users at the Instance Level When setting up user accounts, instance administrators can take advantage of security capabilities such as locking accounts, configuring password to have a fixed lifetime, and requiring user passwords be changed on first use.
- About Application Accounts Authentication
 User accounts are particularly useful if your application is using Application
 Express Accounts authentication. Application Express Accounts is a built-in
 authentication method in which user accounts are created and managed in the
 Oracle Application Express user repository.
- About Application Express User Roles Oracle Application Express users are divided into four roles.



- Creating New User Accounts in Administration Services
 Create new user accounts in Administration Services on the Manage Developers and Users page.
- Editing an Existing User Account in Administration Services
 Edit user accounts in Administration Services on the Manage Developers and Users page.
- Deleting User Accounts in Administration Services Delete user accounts in Administration Services on the Manage Developers and Users page.

See Also:

- "Workspace and Application Administration"
- "Managing Users in a Workspace"

3.16.1 About the Advantages of Managing Users at the Instance Level

When setting up user accounts, instance administrators can take advantage of security capabilities such as locking accounts, configuring password to have a fixed lifetime, and requiring user passwords be changed on first use.



3.16.2 About Application Accounts Authentication

User accounts are particularly useful if your application is using Application Express Accounts authentication. Application Express Accounts is a built-in authentication method in which user accounts are created and managed in the Oracle Application Express user repository.

See Also:

"Application Express Accounts" in Oracle Application Express App Builder User's Guide

3.16.3 About Application Express User Roles

Oracle Application Express users are divided into four roles.



To access the Oracle Application Express development environment, users sign in to a shared work area called a workspace. Users are divided into four primary roles:

- End users do not have access to development or administrative capabilities. End cannot sign into a workspace and create applications. End users can only run existing database or Websheet applications.
- **Developers** are users who create and edit applications, monitor workspace activity, and view dashboards.
- Workspace administrators are users who perform administrator tasks specific to a workspace such as managing user accounts, monitoring workspace activity, and viewing log files.
- **Instance administrators** are superusers that manage an entire hosted instance using the Application Express Administration Services application. Instance administrators manage workspace provisioning, configure features and instance settings, and manage security.

3.16.4 Creating New User Accounts in Administration Services

Create new user accounts in Administration Services on the Manage Developers and Users page.

To create a new user account:

Tip:

You can also access the Create/Edit User page by clicking **Create User** on the Workspace Tasks list on the Instance Administration home page.

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Workspaces.
- 3. Under Workspace Actions, click Manage Developers and Users.

The Manage Developers and Users page appears.

4. Click Create User.

The Create/Edit User page appears.

- **5.** Under User Attribute:
 - a. **Username** Enter the username used to sign in to the system. Restrictions include:
 - Maximum length of 100 characters
 - No spaces
 - Only these special characters are permitted: amerpsand (&) and period (.)
 - b. Email Address Enter a valid e-mail address.
 - c. First Name Enter the user's first name (optional).
 - d. Last Name Enter the user's last name (optional).
 - e. Description Enter a description for this user (optional).



- f. **Default Date Format** Specify the default Oracle date format for the user. This option controls the default date format within SQL Workshop.
- 6. Under Account Privileges:
 - a. Workspace Select a workspace in which to create the user.
 - **b.** Default Schema Select the default schema for this user.
 - c. Accessible Schemas (null for all) Enter a colon-delimited list of schemas for which this developer has permissions when using the SQL Workshop. The list of schemas you enter here restricts the user to a subset of the full set of schemas provisioned for the workspace and determines what schema names the user sees in SQL Workshop.
 - d. User is an administrator Select Yes or No to specify if this user should have workspace administrator privileges. Administrators are given access to all components. Additionally, they can manage user accounts, groups, and development services. Components may not be available if they are switched off by an Instance Administrator.
 - e. User is a developer Select Yes or No to specify if this user should have developer privileges. Developers must have access to either the App Builder, SQL Workshop, or both. Components may not be available if they are switched off by Instance Administrators.
 - f. App Builder Access Determines whether a developer has access to App Builder
 - g. SQL Workshop Access Determines whether a developer has access to the SQL Workshop.
 - h. **Team Development Access** Determines whether a user has access to the Team Development.
 - i. Account Availability Select Locked to prevent the account from being used. Select Unlocked to allow the account to be used.
- 7. Under Password:
 - a. **Password** Enter a case-sensitive password if you are creating a new account with a password, or are updating the password for an existing account.
 - b. Confirm Password Enter the password again if you are creating a new account with a password, or are updating the password for an existing account.
 - c. Require Change of Password On First Use Select Yes to require the user to change the password immediately after logging in the first time.
- 8. Click Create User or Create and Create Another.

3.16.5 Editing an Existing User Account in Administration Services

Edit user accounts in Administration Services on the Manage Developers and Users page.

To edit an existing user account in Administration Services:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Workspaces.



3. Under Workspace Actions, click Manage Developers and Users.

The Manage Developers and Users page appears.

- 4. To edit account details, click a user.
- 5. Edit the appropriate attributes.

6.

	Tip: To learn more about an attribute, see field-level Help.			
- Click Apply Changes .				



3.16.6 Deleting User Accounts in Administration Services

Delete user accounts in Administration Services on the Manage Developers and Users page.

To delete a user account in Administration Services:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Manage Workspaces.
- Under Workspace Actions, click Manage Developers and Users. The Manage Developers and Users page appears.
- 4. Click the user to be deleted.
- 5. Click Delete User.
- 6. Confirm your selection and click **OK**.

3.17 Monitoring Activity Across a Development Instance

Monitor all end user and developer activity for an Oracle Application Express instance.

- Monitoring Activity Monitor all user activity for an instance on the Monitor Activity page.
- Viewing the Signup Survey Report View the Signup Survey report to view the survey questions, answers, and the number of responses.
- Viewing the Backup Log Monitor the performance of a backup job by reviewing the Backup Log.



See Also:
"Viewing Workspace Dashboards"

3.17.1 Monitoring Activity

Monitor all user activity for an instance on the Monitor Activity page.

To monitor activity:

- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Monitor Activity.

The Monitor Activity page appears.

3. Click the appropriate link to view reports across all workspaces.

The Monitor Activity page is divided into the following sections:

- Activity Summary View activity summaries including:
 - **Top Applications** Displays a bar graph of the most active applications based on the criteria specified.
 - Top Workspaces Displays a bar graph the most active workspaces based on the criteria specified.
 - Activity Summary Displays an activity summary including Total page view, Active apps, Active workspaces, Workspaces approved, Workspaces purged, Total apps, Active users, and Total workspaces.
 - Productivity and Sample App Installs Displays a bar graph of the most active productivity and sample application installs.
- **Page Views** View a Dashboard, Page Views by View, Page Views by Application and User, Page Views by Application and User, Page Views by Workspace and User, Page Views by User by Day, Page Views by Application, Page Views by Workspace, and Faceted Workspace Search.
- Service Requests View New Service Requests or Signup Survey activity.
- Workspace Purge View the Workspace Purge Dashboard, Inactive Workspaces, Workspaces Purged, Workspaces that became Active, or a Workspace Purge Log.
- **Logs** Logs incude: Mail Log, Web Service Activity Log, Jobs, Automatic Delete Log, Monitor Productivity and Sample Application Installations, and Backup Log.
- Environment Reports View a environment reports: Page Views by Operating System, Page Views by Browser, Page Views by User Agent, or Page Views by External Site.
- Login Attempts View login reports: Login Attempts or Developer Last Login.
- **Calendar Reports** View calendar reports: Workspace Last Used, Page Views by Day by Application and User, or Page Views By Hour.



- Developer Activity View Application Changes by Developer, Application Changes by Workspace, Native Component Utilization Chart, Native Component Utilization Report, and Data Loading Jobs.
- Archived Activity View archived activity reports.

3.17.2 Viewing the Signup Survey Report

View the Signup Survey report to view the survey questions, answers, and the number of responses.

Instance administrators can also include survey questions users must complete when running the New Service Signup Wizard.

- 1. To view the Signup Survey report:
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Monitor Activity.

The Monitor Activity page appears.

3. Under Service Requests, click the Signup Survey.

The Signup Survey appears displaying the survey questions, answers, and the number of responses.

4. To clear the Signup Survey report, click **Reset Report**.

See Also:

"Defining a Service Signup Wizard"

3.17.3 Viewing the Backup Log

Monitor the performance of a backup job by reviewing the Backup Log.

- 1. To view the Backup Log:
- 1. Sign in to Oracle Application Express Administration Services.
- 2. Click Monitor Activity.

The Monitor Activity page appears.

3. Under Logs, click the **Backup Log**.

The Backup Log appears displaying when a backup job ran, the number of applications backed up by the job, and the elapsed time required to backup the applications.

The elapsed time displays as Hours, Minutes, Seconds, Milliseconds (HH:MI:SS.FF). For example, a job with a duration of 00:00:00.812 took eighthundred-twelve milliseconds. A job with a duration of 00:02:16.956 took two minutes, 16 seconds, nine-hundred-fifty-six milliseconds.

4. Click the Batch number to display the details.

The Backup Log dialog appears displaying the IDs of the applications backed up in the job and the duration.



5. To remove Backup Log data, click **Truncate**.

All Backup Log information is immediately removed.

See Also:

- "Configuring the Number of Application Backups "
- "Managing Application Backups " in Oracle Application Express App Builder User's Guide



A DBMS_SCHEDULER Jobs

The DBMS_SCHEDULER package provides a collection of scheduling functions and procedures that can be called from any PL/SQL program.

List of DBMS_SCHEDULER Jobs

The following table describes DBMS_SCHEDULER jobs that are created in the database when you install Oracle Application Express.

A.1 List of DBMS_SCHEDULER Jobs

The following table describes DBMS_SCHEDULER jobs that are created in the database when you install Oracle Application Express.

Job Name	Description	To Learn More
ORACLE_APEX_AUTO_AP PROVAL	Automatically approves Workspace Requests every two minutes when the instance Provisioning Method is set to Automatic. The job should be disabled for all other Provisioning Methods.	See "Managing Workspace Requests"
ORACLE_APEX_BACKUP	Performs backups of applications that have been modified. Purges backups according to limit defined by the "Number of backups per application" instance setting. The backup job will be disabled when the setting is zero (0). The backup job runs every day starting at 0200.	See "Configuring the Number of Application Backups "
ORACLE_APEX_DICTION ARY_CACHE	This job runs nightly at 0100 to gather statistics and data analysis of all workspace schema tables and caches into the Oracle Application Express Data Dictionary. If the Data Dictionary Cache is incorrect or out of date, you can update Data Dictionary Cache manually from the Workspace Cache report.	See "Viewing or Refreshing the Data Dictionary Cache"

Table A-1 DBMS_SCHEDULER Jobs



Job Name	Description	To Learn More
ORACLE_APEX_DTLD\$ { job-id }	SQI Workshop data loading processes spawn jobs named ORACLE_APEX_DTLD\${ job- id}. Jobs are purged after completion. While the jobs are running, you can view them in Oracle Application Express Administration Services under Monitor Activity, Developer Activity, Data Loading Jobs.	See "Monitoring Activity Across a Development Instance" and "Using Data Workshop" in Oracle Application Express SQL Workshop Guide
ORACLE_APEX_ISSUE_E MAILS	Determines Team Development notifications that must be sent. This job runs every hour.	See "Configuring the Number of Application Backups " in Oracle Application Express App Builder User's Guide
ORACLE_APEX_PURGE_S ESSIONS	Purges sessions older than 12 hours (the default). This job runs every hour.	See "Managing Session State for an Instance"
ORACLE_APEX_MAIL_QU EUE	Sends mail that is in the mail queue every 5 minutes.	See "APEX_MAIL" in Oracle Application Express API Referenceand "Configuring Email"
ORACLE_APEX_WS_NOTI FICATIONS	Determines Websheet notifications that must be sent every 30 minutes.	See "Creating Websheet Applications" in <i>Oracle</i> <i>Application Express App</i> <i>Builder User's Guide</i>
ORACLE_APEX_DAILY_M AINTENANCE	Performs nightly maintenance, every day at 0100. This job archives the activity summary and runs the workspace purge process.	See"Purging Inactive Workspaces"

Table A-1 (Cont.) DBMS_SCHEDULER Jobs

Index

A

accessing reports Administration Dashboard, 2-62 active session, 2-17 Activity Dashboard most viewed pages, 2-64 recent errors, 2-64 recent logins, 2-64 top applications, 2-64 top users, 2-64 Administration Services ceating a workspace, 3-108 enabling access, 3-32 logging in to, 3-3 restricting access, 3-31 administrator roles, 2-37, 3-142 APEX INSTANCE ADMIN UNRESTRICT_SCHEMA, 3-106 APEX INSTANCE ADMIN.CREATE SCHEMA EXCEPTION, 3-108 APEX INSTANCE ADMIN.REMOVE WORKSP ACE EXCEPTIONS, 3-107 APEXExport, 3-136 about, 3-136 APEXExport, using, 3-137 App Builder managing availability at the instance-level, 3-126 App Builder Defaults, 2-65 configuring, 2-66 App Builder, enabling, 2-27 application backups configuring, 3-21 **Application Development Settings** configuring in Administration Services, 3-19 Application Express engine, determining schema for, 3-104 Application Express user groups adding users, 2-46 creating, 2-45 editing, 2-46 Application Express users changing user password, 2-42 creating, 2-37, 3-143

Application Express users (continued) creating multiple, 2-39 deleting accounts, 2-43, 3-145 deleting multiple users, 2-43 editing accounts, 2-41, 3-144 grouping, 2-44 managing, 2-35 Application Express, product information, 2-7 application ID ranges, configuring, 3-73 **Application Installation Options** Allow HTTP Header Variable authentication, 3-22 Allow LDAP Directory authentication, 3-22 Allow Oracle Application Server Single Sign-On authentication. 3-22 application reports, 2-14 applications configuring installation options, 3-22 enabling activity logging, 3-24 enabling tracing, 3-25 exporting from command line, 3-136 Applications Dashboard application groups, 2-65 defaults, 2-65 recently created, 2-65 summary, 2-65 authentication controls about. 3-45 configuring, 3-45 authorized URLs defining. 3-53 deleting, 3-54 editing, 3-54

В

build status about changing, 2-60, 3-140 changing, 2-60, 3-139 changing as instance administrator, 3-139 changing as workspace administrator, 2-60 changing in Administration Services, 3-140 changing in Workspace Administration, 2-61

С

change requests, 3-12, 3-17 approving, 3-18 managing, 3-17 character set, 2-8 checksum hash function selecting, 3-34, 3-35 configuring email Default Email From Address, 3-62 for a runtime instance, 3-63 Images URL, 3-62 Instance URL, 3-62 Maximum Emails per Workspace, 3-62 SMTP Authentication Password, 3-62 SMTP Authentication Username, 3-62 SMTP Host Address, 3-62 SMTP Host Port, 3-62 Use SSL/TLS, 3-62 custom application deleting from repository, 3-83 editing details, 3-82 uploading to repository, 3-81 custom applications about, 3-80

D

DAD, restricting access, 3-50 dashboard accessing workspace administration reports, 2-62 viewing, 2-61 Dashboards page, 2-62 Data Dictionary Cache accessing from Administration Services, 3-133 accessing from Workspace Administration, 2-47 refreshing manually, 2-48, 3-133 viewing from Workspace Administration, 2-48, 3-133 Data Loading Job Class, 3-23 Database Dashboard object counts, 2-65 recently created tables, 2-65 recently modified program units, 2-65 top tables by row count, 2-65 database version, 2-8 database, about version, 2-7 Detailed Tablespace Utilization report, 2-21 **Developer Activity Dashboard** recent application edits, 2-64 recent changes, 2-64 top applications, 2-64

Developer Activity Dashboard *(continued)* top developers, 2-64 top pages, 2-64 Developer activity log, deleting, 3-99 Developer Log Retention, 3-99 developer logs, purging, 2-49

Е

email configuring, 3-60 configuring for development instance, 3-62 determining settings in runtime instance, 3-64 mail queue, 3-88 viewing mail log, 3-88 expired session, 2-17 Export Repository, 2-8 export, APEXExport, 3-136, 3-137 export, workspace, 3-134 exporting from command line, 3-136 exports managing, 2-8 External click counting log, deleting, 3-100 External Clicks Log, purging, 2-49

F

facets determining display, 2-48, 3-133 viewing Facet Display, 2-48, 3-133 viewing Facets Search Score, 2-48, 3-133 feature configuration Application Installation Options, 3-22 configure SQL Workshop, 3-22 configuring monitoring, 3-24 configuring the application backups, 3-21 create demonstration applications, 3-20 create demonstration objects, 3-20 creating Websheet objects, 3-21 **Database Monitoring** Enable Database Monitoring, 3-24 disabling PL/SQL program unit editing, 3-20 disabling SQL Access in Websheets, 3-21 enabling application activity logging, 3-24 enabling database monitoring, 3-24 enabling service requests, 3-27 enabling tracing, 3-25 enabling web service activity logging, 3-25 Monitoring Enable Database Monitoring, 3-24 Enable Web Service Activity Logging, 3-24 Web Service Activity Logging, 3-24

feature configuration (continued) onitoring Application Activity Logging, 3-24

G

groups adding users, 2-46 assigning to another group, 2-46, 2-47 creating, 2-45 editing, 2-46 managing Application Express users, 2-44 removing users, 2-46

Н

help, configuring URL, 3-72 HTTPS reversing requirement for an instance, 3-38, 3-39

import, workspace, 3-134 Installed Translations page, 3-89 Instance administrator chaning build status, 3-139 instance proxy setting, 3-34 instance settings auto extend tablespaces, 3-57 configuring a wallet, 3-65 configuring email, 3-60, 3-62 configuring online Help, 3-72 configuring workspace size options, 3-72 deleting uploaded files, 3-59 disabling email provisioning, 3-56 managing application ID ranges, 3-73 requiring a new schema, 3-57 self service provisioning, 3-55 instance, Session Timeout Maximum Session Idle Time in Seconds, 3-41 Maximum Session Length in Seconds, 3-41 Session Timeout Warning in Seconds, 3-41 interactive report deleting subscriptions, 3-89 manage saved reports, 2-9 manage subscriptions, 2-9 IP address, restricting by IP address, 3-33

L

log entries, deleting, 3-96 Login Access log, deleting entries, 3-100 login controls Account Password Lifetime, 3-46 configuring for workspaces. 3-47 Delay after failed login attempts in Seconds, 3-46 enabling for workspace, 2-25 Inbound Proxy Servers, 3-46 Maximum Login Failures Allowed, 3-46 Method for computing the Delay, 3-46 Require User Account Expiration and Locking, 3-46 Single Sign-On Logout URL, 3-46 Username Validation Expression, 3-46 login message creating, 3-92 deleting, 3-92 editing, 3-92 logs archiving the Activity Log. 3-101 deleting Developer Activity log, 3-99 deleting External Clicks Counting log, 3-100 deleting Login Access log, 3-100 deleting Page View Activity logs, 3-98 deleting SQL Workshop logs, 3-97 deleting Web Service Log Entries, 3-100 managing intervals, 3-101 Retention, 3-99 logs, purging, 2-48

Μ

mail queue, viewing, 3-88 Manage Instance page, 3-8 Manage Service page, 2-19 Manage Workspaces page, 3-10 messages login, 3-91 system, 3-91 monitor activity Active Sessions, 2-17 Activity Summary, 3-146 Application Errors, 2-15 Archived Activity, 3-145, 3-146 Calendar Reports, 3-146 Dashboard. 3-145 Developer Activity, 2-15, 3-146 Developer Activity By Day, 2-16 Environment, 2-15 Environment Reports, 3-146 Login Attempts, 2-15, 3-146 Loas. 3-146 Page View Analysis, 2-15 Page Views, 2-15, 3-146 Page Views By Developer, 2-15 Productivity and Sample App Installs, 3-146 monitor activity *(continued)* Realtime Monitor Reports, *3-145* Service Requests, *3-146* Sessions, *2-15* Top Applications, *3-146* Top Workspaces, *3-146* Workspace Purge, *3-146* Workspace Schema Reports, *2-15*

0

Online Help, configuring, 3-72 **Oracle Application Express** application owner, 2-8 CGI environment, 2-7 character set, 2-8 current time (on server), 2-8 current user, 2-8 database version, 2-8 host schema, 2-8 language preference, 2-8 last DDL time, 2-8 managing component availability, 3-126 schema compatibility, 2-8 version. 2-8 web server software, 2-8 workspace ID, 2-8 workspace name, 2-8 Oracle Application Express administrator, 3-1 APEXExport program, 3-136 approving a change request, 3-18 approving a workspace request, 3-15 changing a workspace request, 3-16 creating a workspace manually, 3-112 creating user accounts, 3-143 deleting a workspace, 3-118 deleting a workspace request, 3-17 deleting log entries, 3-96 deleting user accounts, 3-145 editing user accounts, 3-144 editing workspaces, 3-117 emailing workspace summary, 3-130 exporting a workspace, 3-134 importing a workspace, 3-134 locking a workspace, 3-122 managing email, 3-88 managing instance settings, 3-54 managing schemas, 3-122 managing session state, 3-86 managing users, 3-141 Oracle default schemas, 3-105 purging inactive workspaces, 3-118 viewing database privileges, 3-131 viewing Parse as Schemas report, 3-141 viewing pending new service requests, 3-12 Oracle Application Express administrator *(continued)* viewing pending requests, *3-12* viewing report attributes, *3-117* viewing workpace details, *3-130* viewing workspaces, *3-117*, *3-127* Oracle default schemas determining administrator privilege status, *3-105* removing default restrictions, *3-105* revoking administrator privileges, *3-105* Oracle-managed files, *3-112* outbound HTTP traffic, setting proxy, *3-34*

Ρ

Page View Activity logs, deleting, 3-98 pages, purging cached, 2-59 password policies about strong, 3-48 configuring, 3-49 password policy options Alphabetic Characters, 3-50 Minimum Password Differences. 3-49 Minimum Password Length, 3-49 Must Contain At Least One Alphabetic Character, 3-49 Must Contain At Least One Lower Case Character. 3-49 Must Contain At Least One Numeric Character, 3-49 Must Contain At Least One Punctuation Character, 3-49 Must Contain At Least One Upper Case Character. 3-49 Must Not Contain, 3-50 Must Not Contain Username, 3-49 Must Not Contain Workspace Name, 3-50 Password Hash Function, 3-49 Punctuation Characters. 3-50 password, resetting from Administration page, 2-4.2-7 Performance Dashboard worst page performance, 2-64 PL/SQL Editing in SQL Workshop managing availability at the instance-level, 3-126 PL/SQL editing, disabling, 2-28 PL/SQL program unit editing, 3-20 preferences creating a workspace message, 2-32 for a workspace, 2-24 purging for a specific user, 2-57 Productivity and Sample Applications repository accessing, 3-80

provisioning mode specifying, 3-111 provisioning status specifying, 3-110 proxy, setting for instance, 3-34 public file upload, disabling, 3-33 public themes adding, 3-84 deleting, 3-84 exporting, 3-85 managing, 3-83 modifying, 3-85

R

regions, purging cached, 2-59 **Rejoin Sessions** configuring at instance-level, 3-35, 3-36 report Detailed Tablespace Utilization, 2-21 used and free space, 2-21 report printing about configuring, 3-68 configuring, 3-68 configuring in full development instance, 3-69 configuring in runtime instance, 3-70 determining settings in runtime instance, 3-71 reports Active Sessions, 2-16 Application Attributes, 3-117 Application Changes by Application, 2-16 Application Changes by Developer, 2-15 monitor activity. 2-14 monitoring activity, 2-61 Parse as Schemas, 3-141 schema, 2-17 repository accessing, 3-80 adding custom applications, 3-80 deleting a custom application, 3-83 editing custom applications, 3-82 uploading custom application, 3-81 **REST** Administration Interface disabling. 3-79 enabling, 3-76 registering REST clients applications, 3-76 removing REST clients details, 3-77, 3-78 viewing REST clients details, 3-77 viewing usage statistics, 3-75 **REST** attributes Enable RESTful Services, 3-27 Swagger UI URL, 3-27 **RESTful access** controlling for workspace, 2-29

RESTful Services enabling, 3-26 restricting user access, 3-33

S

schema determining for Application Express, 3-104 editing schema mapping, 3-124 reports, 2-17 requesting new, 2-22 schema mapping, 3-122 editing, 3-124 removing in runtime instance, 3-126 viewing in development instance, 3-123 viewing in runtime instance, 3-123 Secure Sockets Layer (SSL), 3-65 security settings access to Administration Services, 3-31 authentication controls, 3-45 configuring for developer login, 3-46 configuring for developers, 3-46 configuring for end user login. 3-46 configuring for workspace administrators, 3-46 configuring login controls for workspaces, 3-47 configuring password policies, 3-49 defining authorized URLs, 3-53 disabling access to Internal applications, 3-32 disabling cookies to populate login form, 3-30 disabling public file upload, 3-33 disabling workspace login, 3-32 enabling access to Administration Services, 3-32 excluding domains, 3-44 excluding URL regions, 3-44 restricting access by DAD, 3-50 restricting access by IP address, 3-33 reversing HTTPS requirement, 3-38, 3-39 selecting checksum hash function, 3-34, 3-35 setting instance proxy, 3-34 unhandled errors, 3-36 service request enabling for workspace, 3-27 managing, 3-11 more storage, 2-23 new schema, 2-22 requesting, 2-20 requesting a workspace, 2-23 terminate workspace, 2-24 view history, 2-22 Service Request History viewing, 2-22

Service Signup Wizard agreement, 3-102 blocked email domains. 3-102 enable schema selection, 3-102 justification, 3-102 Productivity App Only workspace, 3-102 success message, 3-102 survey. 3-102 service, terminating, 2-24 session state about, 3-86 managing, 2-50, 3-86 purging current session, 2-53 removing, 2-51 viewing session details, 2-51 Session Timeout configuring for instance, 3-41 configuring for workspace, 2-31 session, purging by age, 2-52 Signup Wizard running, **3-103** site-specific tasks lists, 3-95 adding a task, 3-95 deleting a task, 3-96 editing a task, 3-96 SQL Commands, deleting history, 3-97 SQL statements, deleting, 3-97 SQL Workshop configuring, 3-22 deleting logs. 3-97 Enable Transactional SQL Command, 3-23 enabling, 2-28 managing availability at the instance-level, 3-126 Maximum File size for Data Loading in bytes, 3-23 SQL Commands maximum inactivity in minutes, 3-23 SQL Scripts Maximum Script Output Size in bytes, 3-23 SQL Scripts Maximum Script Size in bytes, 3-23 SQL Scripts Maximum Workspace Output Size in bytes, 3-23 storage, requesting more, 2-23 system message creating, 3-93 disabling, 3-93

Т

Table Column Cache refreshing manually, 2-48, 3-133

Team Development Enable Feedback File Repository (new workspaces), 3-28 Enable Feedback File Repository (Workspace), 2-30 Enable Issue File Repository (new workspaces), 3-28 Enable Issue File Repository (Workspace), 2 - 30Enable Team Development (Workspace), 2-30 managing availability at the instance-level, 3-126 Maximum Feedback File Size (new workspaces), 3-28 Maximum Feedback File Size (Workspace), 2-30 Maximum Issue File Size (new workspaces), 3-28 Maximum Issue File Size (Workspace), 2-30 translation, viewing installed, 3-89

U

unhandled errors configuring, 3-36 URL regions, excluding domains, 3-44 user access, restricting access by IP address, 3-33 user account creating, 3-143 deleting, 3-145 editing, **3-144** user preferences managing, 2-50 purging, 2-57 purging for current user, 2-57 removing programmatically, 2-58 resetting using a page process, 2-58 setting. 2-54 viewing by user, 2-56 viewing for current user, 2-56 user roles developer, 2-37, 3-142 Oracle Application Express administrator, 2-37, 3-142 Workspace administrator, 2-37, 3-142 Users Dashboard account information, 2-63 defined user groups, 2-63 defined workspace users, 2-63 recently created users, 2-63

V

viewing, dashboards, 2-61

W

wallet about, 3-65 configuring, 3-65 configuring in full development instance, 3-66 configuring in runtime instance, 3-66 determining settings in runtime instance, 3-67 web service enabling web service activity logging, 3-25 Web Service log, deleting, 3-100 Web services, excluding domains, 3-44 Websheet disabling creation of demo objects, 3-21 disabling SQL access, 3-21 enabling SQL access, 3-21 Websheet Dashboard recent views, 2-64 recently created, 2-64 recently updated, 2-64 workspace summary, 2-64 Websheet Database Objects, 2-12 workspace about provisioning, 3-112 administration, 3-1 configuring preferences, 2-24 creating in Administration Services, 3-108 creating in development environment, 3-112 creating in runtime environment, 3-113 creating manually, 3-112 creating new tablespaces, 3-112 dashboard page, 2-62 deleting, 3-118 deleting inactive, 3-121 determining available space, 2-21 disabling creation of demonstration objects, 3-20 editing, 3-117 exporting, 3-134 exporting from command line, 3-136 from Workspace Administration, 2-13 importing, 3-134 isloating to prevent browser attacks, 3-42 isolating to prevent browser attacks, 3-127 locking, 3-122 login controls, 2-25 managing, 2-1, 2-3 managing exports, 2-8 managing Websheet objects, 2-12 purging, 3-118

workspace (continued) purging inactive, 3-73 removing, 3-130 removing resources, 3-120 requesting with service request, 2-23 selecting provisioning status, 3-110 size options for requests, 3-72 specifying a provisioning mode. 3-111 specifying how to create, 3-110 terminating, 2-24 viewing, 3-117, 3-127 Workspace viewing Service Request History, 2-22 Workspace Administration requesting a workspace, 2-13 Workspace Administration reports Activity, 2-63 Applications, 2-63 Database, 2-63 Developer Activity, 2-63 Performance, 2-63 Users, 2-63 Websheets, 2-63 Workspace, 2-63 Workspace administrator, 2-1, 2-3 changing build status, 2-60 requesting a database schema, 2-22 requesting additional storage, 2-23 requesting service termination, 2-24 viewing schema reports. 2-17 viewing workspace utilization, 2-11 workspace announcement defining in Administration Services, 3-94 workspace cchema reports Database Privileges by Schema, 2-17 Schema Tablespace Utilization, 2-17 Workspace Schemas, 2-17 Workspace Dashboard defined schemas, 2-63 file types, 2-63 files counts. 2-63 number and type of applications, 2-63 open service requests, 2-63 SQL scripts, 2-63 workspace name, 2-63 Workspace Database Privileges, 3-131 Workspace Details report emailing report, 3-130 managing users, 3-130 removing, 3-130 viewing, 3-130 Workspace Isolation, 3-43, 3-44 configuring attributes, 3-128 configuring for an instance, 3-42

Workspace Isolation (continued) Maximum Concurrent Session Requests, 3-44 Workspace Isolation attributes Allow Hostnames, 3-43, 3-129 Concurrent Session Requests Kill Timeout, 3-44, 3-130 Content Cache maximum entry size. 3-130 Content Cache target size, 3-130 Maximum Concurrent Session Requests, 3-129 Maximum Concurrent Workspace Requests, 3-43, 3-129 Maximum Email Messages, 3-130 Maximum Size of Files in Workspace, 3-44, 3-130 Maximum Web Service Requests, 3-44, 3-130 Resource Consumer Group, 3-43, 3-129 workspace login, disabling, 3-32 workspace message, creating, 2-32 workspace preferences App Builder, 2-27 login controls, 2-25 PL/SQL editing, 2-28 SQL Workshop, 2-28 Workspace Preferences Team Development, 2-30 workspace provisioning configuring. 3-55 workspace purge, 3-73 Administration Email Address, 3-74 Days Until Purge, 3-74

workspace purge (continued) enabling, 3-74 language, 3-74 Maximum Number of Workspaces, 3-74 Reminder Days in Advance, 3-74 Summary Email To, 3-74 workspace purge Davs Inactive. 3-74 Maximum Execution Time, 3-74 Maximum Number of Emails. 3-74 workspace purge Grace Period, 3-74 workspace report finding and emailing workspace summary, 3-132 having only sample applications, 3-120 viewing file size and count, 3-132 workspace request, 3-12 workspace requests approving, 3-15 changing, 3-16 configuring size options, 3-72 Workspace Requests page, 3-13 workspace schema reports Report Tablespace Utilization (popup), 2-17 Workspace Utilization Report emailing, 2-11 viewing, 2-11 workspace, Session Timeout Maximum Session Idle Time in Seconds. 2-31 Maximum Session Length in Seconds, 2-31 Session Timeout Warning in Seconds, 2-31