

# **Oracle Utilities Customer Care and Billing**

Database Administrator's Guide

Release 2.8.0.0.0

**F38888-01**

April 2021  
(Updated October 2021)

Oracle Utilities Customer Care and Billing Database Administrator's Guide, Release 2.8.0.0.0

Copyright © 2000, 2021 Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software" or "commercial computer software documentation" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

---

---

# Contents

<b>Preface</b> .....	<b>i</b>
Audience .....	ii
Related Documents .....	ii
Updates to this Documentation .....	ii
Conventions.....	ii
Acronyms.....	iii
<b>Chapter 1</b>	
<b>Database Overview</b> .....	<b>1-1</b>
Supported Database Platforms.....	1-2
Supported Platforms Summary Table.....	1-2
Support for Software Patches and Upgrades.....	1-2
Database Maintenance Rules .....	1-3
Permitted Database Changes.....	1-3
Non-Permitted Database Changes .....	1-3
<b>Chapter 2</b>	
<b>Installing the Database</b> .....	<b>2-1</b>
Installation Overview .....	2-2
Creating the Database.....	2-2
Installing the Oracle Database.....	2-4
Database Scripts and Utilities.....	2-4
Initial Install (Installing v2.8.0.0.0 for the First Time) .....	2-4
Installing the CISADM Schema.....	2-8
Upgrade Install.....	2-16
Demo Install .....	2-37
<b>Chapter 3</b>	
<b>Database Design</b> .....	<b>3-1</b>
Database Object Standard.....	3-2
Categories of Data.....	3-2
Naming Standards .....	3-2
Column Data Type and Constraints .....	3-6
User Defined Code .....	3-6
System Assigned Identifier .....	3-6
Date/Time/Timestamp .....	3-6
Number.....	3-6
Fixed Length/Variable Length Character Columns .....	3-6
Null Column Support.....	3-6
XML Type Support.....	3-7
Cache and Key Validation Flags .....	3-7
Table Classification and Table Volume Flags.....	3-7
Default Value Setting.....	3-7

Foreign Key Constraints .....	3-8
Standard Columns .....	3-8
Owner Flag.....	3-8
Version.....	3-8
<b>Chapter 4</b>	
<b>Database Implementation Guidelines.....</b>	<b>4-1</b>
Configuration Guidelines .....	4-2
Index .....	4-2
Table Partitioning Recommendations.....	4-2
Transparent Data Encryption Recommendations .....	4-2
Data Compression Recommendations .....	4-3
Database Vault Recommendations .....	4-7
Oracle Fuzzy Search Support.....	4-7
Information Lifecycle Management (ILM) and Data Archiving Support.....	4-8
Storage Recommendations .....	4-8
ILM Enabled Tablespace Requirements .....	4-8
Database Configuration Recommendations .....	4-9
Database Syntax.....	4-9
Database Initialization Parameters .....	4-9
Oracle Database Implementation Guidelines .....	4-10
Oracle Partitioning.....	4-10
Database Statistic.....	4-10
Materialized View.....	4-11
<b>Chapter 5</b>	
<b>Conversion Tools .....</b>	<b>5-1</b>
Database Configuration.....	5-2
Installing the Script.....	5-2
Preparing the Production Database.....	5-3
Preparing the Staging Database.....	5-3
<b>Chapter 6</b>	
<b>Information Lifecycle Management and Data Archiving in CCB .....</b>	<b>6-1</b>
ILM Implementation Overview .....	6-2
ILM Implementation Components .....	6-2
ILM Database Administrator's Tasks.....	6-3
Preparation Phase.....	6-3
On-going Maintenance Phase .....	6-4
Naming Convention.....	6-6
<b>Appendix A</b>	
<b>Sample SQL for Enabling ILM in CCB (Initial Install).....</b>	<b>A-1</b>
Maintenance Object: TO DO ENTRY .....	A-1
Parent Table: CI_TD_ENTRY .....	A-1
Child Table: CI_TD_DRLKEY .....	A-4
Child Table: CI_TD_ENTRY_CHA.....	A-5
Child Table: CI_TD_LOG.....	A-5
Child Table: CI_TD_MSG_PARM .....	A-6
Child Table: CI_TD_SRTKEY .....	A-7
Maintenance Object:F1-SYNCREQIN .....	A-7
Parent Table: F1_SYNC_REQ_IN .....	A-7
Child Table: F1_SYNC_REQ_IN_CHAR.....	A-12
Child Table: F1_SYNC_REQ_IN_EXCP .....	A-13
Child Table: F1_SYNC_REQ_IN_EXCP_PARM.....	A-13
Child Table: F1_SYNC_REQ_IN_LOG .....	A-14
Child Table: F1_SYNC_REQ_IN_LOG_PARM.....	A-15
Child Table: F1_SYNC_REQ_IN_REL_OBJ .....	A-15

---

## Appendix B

Sample SQL For Enabling ILM in CCB (Existing Installation) .....	B-1
--	-----

## Appendix C

Sample SQL for Periodic Maintenance .....	C-1
Add Partition .....	C-2
Archive Partition .....	C-2
Restore Partition .....	C-5

## Appendix D

Sample SQL for ILM in CCB .....	D-1
Maintenance Object: Adjustment .....	D-2
Parent Table: CI_ADJ .....	D-2
Maintenance Object: Bill Segment .....	D-9
Parent Table: CI_BSEG .....	D-9

## Appendix E

Sample Scripts for Customer Contact Enhancement .....	E-1
Updating Customer Contact Account and Premise .....	E-2
Updating Preferred Contact Method on Legacy Values .....	E-7

## Appendix F

Upgrades to the Oracle Utilities Customer Care and Billing 2.8.0.0 Database .....	F-1
---	-----

## Appendix G

Upgrades to the Oracle Utilities Application Framework Database .....	G-1
Upgrading from Oracle Utilities Application Framework v4.3.0.1.0 to v4.3.0.2.0 .....	G-2
Upgrading from Oracle Utilities Application Framework v4.3.0.2.0 to v4.3.0.3.0 .....	G-4
Upgrading from Oracle Utilities Application Framework v4.3.0.3.0 to v4.3.0.4.0 .....	G-6
Upgrading from Oracle Utilities Application Framework v4.3.0.4.0 to v4.3.0.5.0 .....	G-8
Upgrading from Oracle Utilities Application Framework v4.3.0.5.0 to v4.3.0.6.0 .....	G-11
Upgrading from Oracle Utilities Application Framework v4.3.0.6.0 to v4.4.0.0.0 .....	G-14
Upgrading from Oracle Utilities Application Framework v4.4.0.0.0 to v4.4.0.2.0 .....	G-15
Upgrading from Oracle Utilities Application Framework v4.4.0.2.0 to v4.4.0.3.0 .....	G-18

## Appendix H

Oracle Application Framework System Table Guide .....	H-1
About the Application Framework System Tables .....	H-2
System Table Standards .....	H-2
Guidelines for System Table Updates .....	H-3
Business Configuration Tables .....	H-3
Development and Implementation System Tables .....	H-5
System Table List .....	H-20

---

# Preface

Welcome to the Oracle Utilities Customer Care and Billing Database Administrator's Guide.

This guide provides instructions for installing and maintaining the database for Oracle Utilities Customer Care and Billing.

The preface includes the following:

- [Audience](#)
- [Related Documents](#)
- [Updates to this Documentation](#)
- [Conventions](#)
- [Acronyms](#)

## Audience

This guide is intended for database administrators who will be installing and maintaining the database for Oracle Utilities Customer Care and Billing.

## Related Documents

For more information, refer to these Oracle documents:

### Installation Guides and Release Notes

- *Oracle Utilities Customer Care and Billing Release Notes*
- *Oracle Utilities Customer Care and Billing Quick Install Guide*
- *Oracle Utilities Customer Care and Billing Installation Guide*
- *Oracle Utilities Customer Care and Billing Database Administrator's Guide*
- *Oracle Utilities Customer Care and Billing Database Changes Guide*
- *Oracle Utilities Customer Care and Billing Optional Products Installation Guide*
- *Oracle Utilities Customer Care and Billing Licensing Information User Manual*

### Administrative and Business User Guides

- *Oracle Utilities Customer Care and Billing Administrative User Guide*
- *Oracle Utilities Customer Care and Billing Business User Guide*

### Supplemental Documents

- *Oracle Utilities Customer Care and Billing Server Administration Guide*
- *Oracle Utilities Customer Care and Billing Security Guide*

## Updates to this Documentation

This documentation is provided with the version of the product indicated. Additional and updated information about the operations and configuration of the product is available from the Knowledge Base section of My Oracle Support (<http://support.oracle.com>). Please refer to My Oracle Support for more information.

## Conventions

The following text conventions are used in this document:

Convention	Meaning
<b>boldface</b>	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.

Convention	Meaning
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
monospace	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

## Acronyms

The following terms are used in this document:

Term	Expanded form
CCB	Oracle Utilities Customer Care and Billing
CM	Customer Modification
DBCA	Database Configuration Assistant
OUAF	Oracle Utilities Application Framework
OSDC	Oracle Software Delivery Cloud



# Chapter 1

---

## Database Overview

This chapter provides an overview of the Oracle Utilities Customer Care and Billing database, including:

- [Supported Database Platforms](#)
- [Database Maintenance Rules](#)

# Supported Database Platforms

This section defines the platforms on which Oracle Utilities Customer Care and Billing is verified to operate.

## Supported Platforms Summary Table

Oracle Utilities Customer Care and Billing is supported on the following platforms:

Platform	Database Versions
AIX 7.1 TL5 and 7.2 TL3+ for POWER (64-bit)	
Linux 7.x* and 8.x (64-bit)	Oracle 19c (64-bit)
Solaris 11.4+ for SPARC (64-bit)	

\* Oracle Utilities Customer Care and Billing is tested on both Oracle Database Enterprise Edition and Standard Edition. Some features, such as Advanced Compression and Partitioning, require the Enterprise Edition.

For Oracle Linux 7.x applicable end of support dates, refer to the [Oracle Lifetime Support Policy: Oracle and Sun System Software and Operating Systems](#) document.

The following Oracle Database Server Editions are supported:

- Oracle Database Enterprise Edition
- Oracle Database Standard Edition

**Note:** Oracle Database Enterprise Edition and the Partitioning and Advanced Compression options are not mandatory but recommended. Standard Edition should only be considered suitable for very small, pilot projects or development environments where scalability, performance, and database size-on-disk are not important considerations. Oracle Database Enterprise Edition, including the Advanced Compression and Partitioning options, is strongly recommended in all other situations.

Refer to My Oracle Support for additional details.

## Support for Software Patches and Upgrades

Due to the ongoing nature of software improvement, vendors will issue patches and service packs for the operating systems, application servers and database servers on top of specific versions that Oracle Utilities Customer Care and Billing has been tested with.

If it is necessary to apply an upgrade, please do so in a test environment that is running on the same platform as your production environment prior to updating the Oracle Utilities Customer Care and Billing production environment.

The exceptions from this rule are Hibernate 4.1.0 GA and Oracle Client 19c. These should not be upgraded.

Always contact Oracle Utilities Customer Care and Billing Support prior to applying vendor updates that do not guarantee backward compatibility.

---

# Database Maintenance Rules

The database supplied with the product consists of the following elements:

- A set of users to administrate, execute and read the database schema provided.
- A set of database roles to implement security for each of the users provided.
- A tablespace and a schema containing the base database objects used by the product.

The installation instructions are outlined in the installation section of this document.

## Permitted Database Changes

During and after installation of the product the following changes may be performed by the database administrator personnel on site:

- Users supplied by product may be changed according to the site standards.
- Database objects may be added to the schema according to database naming standards outlined later in this document.
- Database views and indexes may be created against base database objects. Please make sure to prefix new items with “CM” (for customer modification).
- Database storage attributes for base indexes and base tables may be changed according to site standards and hardware used.
- Tablespace names, attributes and locations may be changed according to site standards.
- Database topology (base table/index to tablespace, tablespace to data file, data file to location) may be altered according to tuning and/or site standards.
- Database triggers may be created against base database objects unless they attempt to contravene base data integrity rules.
- Database initialization and parameter settings may be altered according to site standards unless otherwise advised by Oracle Support or outlined.

## Non-Permitted Database Changes

In order to maintain operability and upgradeability of the product, during and after the installation of the product, the following changes may *not* be performed by the database administration personnel on site.

Base objects must not be removed or altered in the following ways:

- Columns in base tables must not be altered, removed or added in anyway.
- Columns in Indexes must not be altered or removed.
- Tables must not be renamed or removed.
- Base views must not be renamed or removed.
- Base Triggers and Sequences must not be renamed or removed.
- Base indexes must not be altered or removed.

# Chapter 2

---

## Installing the Database

This chapter provides the instructions for installing or upgrading the Oracle Utilities Customer Care and Billing database, including:

- [Installation Overview](#)
- [Installing the Oracle Database](#)

# Installation Overview

Refer to [Supported Database Platforms](#) for information about the supported platforms on which Oracle Utilities Customer Care and Billing is verified to operate.

The following types of installation are available for Oracle Utilities Customer Care and Billing:

- **Initial Install** — a database with no demo data.
- **Upgrade Install** — a database upgrade to version 2.8.0.0.0 from versions 1.5.10, 1.5.15, 1.5.20, 2.0.5, 2.1.0, 2.2.0, 2.2.0.10, 2.3.1.10, 2.4.0.0, 2.4.0.1, 2.4.0.2, 2.4.0.3, 2.5.0, 2.5.0.1, 2.5.0.2, 2.6.0.0, 2.6.0.1, 2.7.0.0, 2.7.0.1, 2.7.0.2 and 2.7.0.3.
- **Demo Install** — a database populated with demo data.

The database installation requires a supported version of the Java Development Kit V8.0 and Oracle 19c 32-bit client installed on the Windows 64-bit or 32-bit desktop where the install package is staged and run.

## Creating the Database

For an initial install or demo install you will create an empty database on the Unix or Windows database server on which you operate the production instance of Oracle Utilities Customer Care and Billing.

1. Create the database using the Database Configuration Assistant (DBCA).

Refer to the article *Master Note: Overview of Database Configuration Assistant (DBCA) (Doc ID 1488770.1)* on My Oracle Support for more information. Make sure to set for database as follows:

- Character set for database as AL32UTF8
- National Character Set (NLS\_NCHAR\_CHARACTERSET - AL16UTF16)

**Note:** While prior versions of the product have included the cdxdba programs (cdxdba.plx for UNIX or CDXDBA.exe for Windows), this is no longer supported going forward, and the Database Configuration Assistant should be used instead.

2. Enable the mandatory software options.
  - Oracle Spatial OR Oracle Locator
  - Oracle Text
3. Run the following SQL to make sure it is successful.

```
SELECT COMP_NAME,STATUS FROM DBA_REGISTRY WHERE COMP_NAME IN ('Spatial','Oracle Text');
```

4. Create the default tablespace CISTS\_01 and the required users and roles.

```
CREATE TABLESPACE CISTS_01 LOGGING DATAFILE '<db_file_location>/oradata/<DB_NAME>/cists01.dbf' SIZE 1024M REUSE AUTOEXTEND ON NEXT 8192K MAXSIZE UNLIMITED EXTENT MANAGEMENT LOCAL UNIFORM SIZE 1M;
```

5. Create a role and grant privileges to the required roles.

```
CREATE ROLE CIS_USER;
```

```
CREATE ROLE CIS_READ;

GRANT CREATE SYNONYM to CIS_USER;
GRANT CREATE SYNONYM to CIS_READ;
```

## 6. Create the users.

```
CREATE USER CISADM IDENTIFIED BY CISADM DEFAULT TABLESPACE CISTS_01
TEMPORARY TABLESPACE TEMP PROFILE DEFAULT;
GRANT UNLIMITED TABLESPACE TO CISADM WITH ADMIN OPTION;
GRANT SELECT ANY TABLE TO CISADM;
GRANT CREATE DATABASE LINK TO CISADM;
GRANT CONNECT TO CISADM;
GRANT RESOURCE TO CISADM;
GRANT DBA TO CISADM WITH ADMIN OPTION;
GRANT CREATE ANY SYNONYM TO CISADM;
GRANT SELECT ANY DICTIONARY TO CISADM;
```

```
CREATE USER CISUSER PROFILE DEFAULT IDENTIFIED BY CISUSER DEFAULT
TABLESPACE CISTS_01 TEMPORARY TABLESPACE TEMP;
GRANT SELECT ANY TABLE TO CISUSER;
GRANT CIS_USER TO CISUSER;
GRANT CIS_READ TO CISUSER;
GRANT CONNECT TO CISUSER;
```

```
CREATE USER CISOPR PROFILE DEFAULT IDENTIFIED BY OPRPLUS DEFAULT
TABLESPACE CISTS_01 TEMPORARY TABLESPACE TEMP;
GRANT CONNECT,RESOURCE,EXP_FULL_DATABASE TO CISOPR;
```

```
CREATE USER CISREAD IDENTIFIED BY CISREAD DEFAULT TABLESPACE
CISTS_01 TEMPORARY TABLESPACE TEMP;
GRANT SELECT ANY TABLE TO CISREAD;
GRANT CIS_READ TO CISREAD;
GRANT CONNECT TO CISREAD;
```

## 7. Review the Storage.xml file under the FW\Install-Upgrade folder prior to an initial install or upgrade install.

This file allocates all base tables and indexes to the default tablespace CISTS\_01 and the required users and roles. Information in this file is used by spl-oradbi-4.4.0.3.0.jar while installing the Oracle Utilities Customer Care and Billing database objects. Refer to [Updating Storage.xml](#) for more details on updating this file.

**Note:** You will need to review the Storage.xml file, prior to an initial install, to update the default values to custom values (for example: TableSpace Name). spl-oradbi-4.4.0.3.0.jar can be executed by a non-schema owner in order to upgrade the database. The Initial Install still needs to be done by the schema owner.

If you decide to allocate some tables or indexes outside of the default tablespace, change the tablespace name from the default value to a custom value in the Storage.xml file.

For instance, if you decide to allocate table CI\_ACCT in a tablespace MyTablespace, change Storage.xml as shown:

```
<CI_ACCT>
<TABLESPACE>MyTablespace</TABLESPACE>
</CI_ACCT>
```

For optimum storage allocation, database administrators should create multiple tablespaces with extents sized to store different types of tables/indexes. They can then

edit the `storage.xml` file before install process, to spread tables and indexes across these tablespaces. Tables and indexes can be created in parallel by editing degree of parallelism. Tablespace, storage options, secure file options, Advanced Compression, and parallel information are used only for new objects. Therefore, for initial installs, information for each object should be reviewed. Be careful while editing this file. Make sure that tablespace names being used exist in the database. Do not change the basic format of this file.

**Note:** Prior to the installation of the database schema for the product, please ensure that the Database Management System software is installed according to your site standards and the installation guide provided by the database vendor. Also, make sure that you have necessary licenses to use some of the advanced database features, such as Advanced Compression.

## Installing the Oracle Database

This section describes how to install the Oracle database for Oracle Utilities Customer Care and Billing 2.8.0.0.0, including:

- [Database Scripts and Utilities](#)
- [Initial Install \(Installing v2.8.0.0.0 for the First Time\)](#)
- [Upgrade Install](#)
- [Demo Install](#)

**Note:** The installation tools outlined in this guide run on Windows and UNIX/Linux only. Refer to the [Supported Database Platforms](#) section in [Chapter 1: Database Overview](#) for more information on supported platforms.

### Database Scripts and Utilities

Follow these steps before you begin installing the database:

Starting v2.6.0.0.0, installation scripts can be run in a Linux or Windows machine. Upgrades from version beyond 2.6.0.0.0 need to set up a Microsoft Windows desktop with the Oracle Client 19c 32-bit installed.

### Initial Install (Installing v2.8.0.0.0 for the First Time)

This section describes an initial installation of the v2.8.0.0.0 database. It focuses on the following:

- [Copying and Decompressing Install Media](#)
- [Database Creation](#)
- [Installing the CISADM Schema](#)

**Note:** You must have a supported version of the Java Development Kit installed on the Windows desktop where you stage and run the database installation package. Refer to the *Oracle Utilities Customer Care and Billing Installation Guide* for more information.

## Copying and Decompressing Install Media

To copy and decompress the Oracle Utilities Customer Care and Billing database:

1. Download Oracle Utilities Application Framework V4.4.0.3.0 Oracle Database, Oracle Utilities Application Framework V4.4.0.3.0 Single Fix Prerequisite Database Rollup for CCB V2.8.0.0.0 (if there is any), Oracle Utilities Customer Care and Billing V2.8.0.0.0 Oracle Database and Oracle Utilities Customer Care and Billing V2.8.0.0.0 Single Fix Database Rollup MultiPlatform (if there is any) from the Oracle Software Delivery Cloud.
2. Copy FW-V4.4.0.3.0-Oracle-Database-Multiplatform, CCB-V2.8.0.0.0-FW-Database-PREREQ-MultiPlatform (if there is any), CCB-V2.8.0.0.0-Oracle-Database-Multiplatform and CCB-V2.8.0.0.0-Database-Rollup-MultiPlatform (if there is any) directories to your local machine.

These files contain all the database components required to install the Oracle Utilities Application Framework and Customer Care and Billing database.

## Database Creation

**Note:** You must have Oracle Database Server installed on your machine in order to create the database. This step is not required if you are performing a database upgrade from a previous version of Oracle Utilities Customer Care and Billing.

## Creating the Database on UNIX

Create the database using the Database Configuration Assistant (DBCA).

Refer to the article *Master Note: Overview of Database Configuration Assistant (DBCA) (Doc ID 1488770.1)* on My Oracle Support for more information. Make sure to set for database as follows:

- Character set for database as AL32UTF8
- National Character Set (NLS\_NCHAR\_CHARACTERSET - AL16UTF16)

Refer to the [Creating the Database](#) section for steps to create the database.

## Creating the Database on Windows

You should be logged in as a user who is a member of the local ORA\_DBA group on that server. The ORA\_DBA group should have “administrator” privileges assigned to it.

Refer to the article *Master Note: Overview of Database Configuration Assistant (DBCA) (Doc ID 1488770.1)* on My Oracle Support for more information. Make sure to set character set for database as follows:

- Character set for the database (NLS\_CHARACTERSET - AL32UTF8)
- National Character Set (NLS\_NCHAR\_CHARACTERSET - AL16UTF16)

Refer to the [Creating the Database](#) section for steps to create the database.

## Database Globalization Support Consideration

Oracle Utilities Application Framework is a multilingual capable application that supports the storage, processing, and retrieval of data in multiple languages by leveraging the Oracle Database globalization support architecture. Use of the AL32UTF8 Unicode character encoding system allows the database to support multiple languages.



By default, the database is created with BYTE length semantics. To store data using CHARACTER length semantics, set NLS\_LENGTH\_SEMANTICS to CHAR at session level via a logon trigger during installs.

Example:

```
CREATE OR REPLACE TRIGGER RCU_INSTALL_TRIGGER after logon on
database
declare
user_name varchar2(100);
begin
select user into user_name from dual;
if ( user_name LIKE 'CISADM' or user_name LIKE 'STG%' ) THEN
execute immediate 'alter session set nls_length_semantics=CHAR';
END IF;
END;
```

There are multiple ways to migrate a database from BYTE to CHAR length semantics:

- **By script:** For details, refer to the *Doc ID 313175.1* on My Oracle Support.
- **Alternative procedure:** Below is an alternate way to create a schema with character-length semantics, and then importing the data from a byte-based export.

#### Initial Install

1. Create the database using DBCA.
2. Run the following statement to set nls\_length\_semantics=CHAR.

**Note:** For Container DB, it should be done on the container DB.

```
SQL> ALTER SYSTEM SET nls_length_semantics=CHAR SCOPE=BOTH;
```

3. Restart the database.
4. Verify that the nls\_length\_semantics is CHAR using the following command:

```
SQL> SHOW PARAMETER nls_length_semantics
```

**Note:** For pluggable databases ensure to set nls\_length\_semantics=CHAR.

#### Migrating from BYTE Based Storage to CHARACTER Based Storage

1. Create a database using DBCA.
2. Set nls\_length\_semantics=CHAR.

```
SQL> ALTER SYSTEM SET nls_length_semantics=CHAR SCOPE=BOTH;
```

3. Restart the database.
4. Make sure nls\_length\_semantics is CHAR.

```
SQL> SHOW PARAMETER nls_length_semantics
```

**Note:** For pluggable database ensure to set nls\_length\_semantics=CHAR.

5. Export schema from the database that has nls\_length\_semantics=BYTE.

```
expdp userid=system/<code>@<SID> directory=<DIR_NAME>
schemas=<schema_name> dumpfile=<schema_name>.dmp
logfile=<schema_name>.log
```

6. Generate DDL from dump file using Oracle impdp utility.

```
impdp userid=system/<code>@<SID> directory=<DIR_NAME>
DUMPFILE=<schema_name>.dmp SCHEMAS=<schema_name>
SQLFILE=<schema_name>_DDL.sql
```

7. Replace “Byte” with “Char” in <schema\_name>DDL.sql.

For vi editor (in Linux), use the following command to replace Byte to Char.

```
:%s/BYTE/CHAR/g
```

8. Replace the schema name also if it is required for environment.
9. Run <schema\_name>DDL.sql (generated in step 6) that creates objects in the schema.

To make sure the number of objects at source and target are equal:

```
SQL>select OWNER || ' ' || OBJECT_TYPE || ' ' || COUNT(*) || ' '
|| STATUS FROM DBA_OBJECTS WHERE OWNER in ('<SCHEMA_NAME>') GROUP
BY OWNER, OBJECT_TYPE , STATUS ORDER BY OBJECT_TYPE;
```

10. If an object is missing for any reason, create it by fixing DDL manually (DDL for each object is available in the file which was created in step 6).

Run DDL for the objects that are not created.

11. Generate DDL to disable triggers.

```
SQL> SELECT 'ALTER TABLE' || ' ' ||TABLE_NAME || ' ' || 'DISABLE ALL
TRIGGERS;' FROM USER_TABLES;
```

12. Run the script generated from step 11 to disable all triggers.
13. Import the data only.

To import data only into the schema created to support CHAR based database storage:

```
impdp userid=system/<code>@<SID> dumpfile=<schema_name>.dmp
CONTENT=DATA_ONLY SCHEMAS=<schema_name>
LOGFILE=<schema_name>_import.log
```

14. Enable the triggers.

To generate DDL for triggers:

```
SQL>SELECT 'ALTER TABLE' || ' ' ||TABLE_NAME || ' ' || 'ENABLE ALL
TRIGGERS;' FROM USER_TABLES;
```

15. Run the script generated from step No.14 to enable all triggers.

**Extended Datatypes**

Some of the Oracle Utilities Application Framework application table varchar2 fields require byte size beyond 4000 bytes to store data for new application requirements. To support this requirement the Oracle Utilities Application Framework database should use the Extended Data Types - Oracle database 12c feature (EXTENDED - the 32767 byte limit introduced in Oracle Database 12c applies.).

Enable the Extended Data Types by setting DB parameter, `max_string_size = EXTENDED`.

Follow the instructions provided in [Oracle database documentation](#) for including this change in your database.

**Important!** This change in your database environment is mandatory. If not included it will lead to errors during the v4.4.0.2.3 upgrade.

**Installing the CISADM Schema**

You should install Oracle Utilities Application Framework V4.4.0.3.0 and Oracle Utilities Application Framework V4.4.0.3.0 Single Fix Prerequisite Database Rollup for CCB V2.8.0.0.0 (if there is any) prior to installing Oracle Utilities Customer Care and Billing 2.8.0.0.0.

The files for Oracle Utilities Application Framework installers are located in the `..\FW-V4.4.0.3.0-Oracle-Database-Multiplatform\FW\Install-Upgrade` folder.

The installation process prompts you for the following information:

- The target database name in which the product is to be installed.
- A database user that will own the application schema (Example: CISADM).
- A database user that has read-write (select/update/insert/delete) privileges to the objects in the application schema. (Example: CISUSER).

The application will access the database as this user.

- A database user with read-only privileges to the objects in the application schema. (Example: CISREAD).
- A database role that has read-write (select/update/insert/delete) privileges to the objects in the application schema. The application will access the database as this user. (Example: CIS\_USER).
- A database role with read-only privileges to the objects in the application schema. (Example: CIS\_READ).
- Location for jar files. (The Jar files are bundled with the database package.)
- Java Home (Example: C:\Java\jdk1.8)

This section focuses on the following:

- [Installing the Oracle Utilities Application Framework Database Component](#)
- [Installing Framework Prerequisite Database Single Fixes](#)
- [Installing Oracle Utilities Customer Care and Billing Database Component](#)
- [Installing Oracle Utilities Customer Care and Billing Database Rollup](#)

- [Tasks Performed by ORADBI](#)
- [Post-installation Tasks](#)

## Installing the Oracle Utilities Application Framework Database Component

**Note:** Oracle Utilities Application Framework Database Component can be installed using OraDBI.java. While prior versions of the product have included OraDBI.exe, this is no longer supported going forward as this does not support latest functionality/features introduced in spl-oradbi-4.4.0.3.0.jar is delivered in directory jarfiles.

This section includes the instructions to install the database component.

### Installing the Oracle Utilities Application Framework Database Component Using OraDBI.java

OraDBI.java is a new tool to install and upgrade database components. It can be run from UNIX or Windows machines that has the following installed:

- Oracle 19c
- Oracle 19c Client

Before installing the database component, make sure the following prerequisites are met.

- JDK 1.8
- Oracle Database
- Schema (such as CISADM) should exist in the database
- max\_string\_size is set to EXTENDED

To install the Oracle Utilities Application Framework V4.4.0.3.0:

1. Unzip FW-V4.4.0.3.0-Oracle-Database-Multiplatform.zip package.
2. Set JAVA\_HOME, PATH, and CLASSPATH.

#### UNIX:

```
export JAVA_HOME=/scratch/software/jdk1.8.0_102/
export PATH=$JAVA_HOME/bin:$PATH
export CLASSPATH=../FW-V4.4.0.3.0-Oracle- Database-
Multiplatform/FW/jarfiles/*
```

#### WINDOWS:

```
SET JAVA_HOME=C:\Program Files\Java\jdk1.8.0_101
SET PATH=%JAVA_HOME%\bin;%PATH%
SET CLASSPATH= C:\ FW-V4.4.0.3.0-Oracle-Database-
Multiplatform\FW\jarfiles\*
```

3. Run the following command from the command line or command prompt from ..\FW\Install-Upgrade folder.

There are two options available to execute OraDBI.java:

- Using interactive mode
- Using command on command line

**Using Interactive Mode:****UNIX:**

```
java -Xmx1500M com.oracle.ouaf.oem.install.OraDBI -p
<RW_USERPASS>,<R_USERPASS>
```

**WINDOWS:**

```
"C:\Program Files\Java\jdk1.8.0_101"\bin\java -Xmx1500M -cp C:\FW-
V4.4.0.3.0-Oracle-Database-Multiplatform\FW\jarfiles\*
com.oracle.ouaf.oem.install.OraDBI -p <RW_USERPASS>,<R_USERPASS>
```

The utility prompts you to enter values for the parameters listed below:

- Enter the database server hostname:<SERVER NAME>
- Enter the database port number:<PORT>
- Enter the database name/SID:<DB NAME>
- Enter your database username:<CISADM>
- Enter your password for username CISADM:
- Enter the Oracle user with read-write privileges to Database Schema:<CISUSER>
- Enter your password for username CISUSER:
- Enter the Oracle user with read-only privileges to Database Schema:<CISREAD>
- Enter your password for username CISREAD:
- Enter the database role with read-write privileges to Database Schema:<CIS\_USER>
- Enter the database role with read-only privileges to Database Schema:<CIS\_READ>
- Enter the name of the target Schema where you want to install or upgrade:<CISADM>

**Using the Command Line:****UNIX:**

```
java -Xmx1500M com.oracle.ouaf.oem.install.OraDBI -d
jdbc:oracle:thin:@<DB_SERVER>:<PORT>/
<SID>,<DBUSER>,<DBPASS>,<RW_USER>,<R_USER>,<RW_USER_ROLE>,<R_USER_
ROLE>,<DBUSER> -p <RW_USERPASS>,<R_USERPASS>
```

**WINDOWS:**

```
"C:\Program Files\Java\jdk1.8.0_101"\bin\java -Xmx1500M -cp C:\FW-
V4.4.0.3.0-Oracle-Database-Multiplatform\FW\jarfiles\*
com.oracle.ouaf.oem.install.OraDBI -d
jdbc:oracle:thin:@<DB_SERVER>:<PORT>/
<SID>,<DBUSER>,<DBPASS>,<RW_USER>,<R_USER>,<RW_USER_ROLE>,<R_USER
ROLE>,<DBUSER> -p <RW_USERPASS>,<R_USERPASS>
```

This process generates log files in the directory ..\FW\Install-Upgrade\logs.

4. Make sure to check the log files for any errors.

**Note:** For OraDBI java, you may receive the following message in the display output or logs. These errors can be safely ignored and the process should proceed to completion.

```
- 2016-05-23 16:31:38,315 [main] ERROR
(common.cryptography.KeyStoreWrapperFactory) The keystore file
'<filename>' does not exist...
```

...

This file is either provided by the property com.oracle.ouaf.system.keystore.file or expected to exist at the default file location null Attempting to use the legacy cryptography.

```
- 2016-05-23 16:31:38,566 [main] INFO (oem.install.OraDBI)
```

## Installing Framework Prerequisite Database Single Fixes

While prior versions of the product have included the cdxpatch.exe programs for applying DB Hot Fixes, this is no longer supported going forward; the ouafDatabasePatch.cmd or ouafDatabasePatch.sh should be used instead. The new tool can be run from UNIX or Windows machines.

**Important:** Confirm if there are Prerequisite Database Single Fixes. Check if there is a CCB-V2.8.0.0-FW-Database-PREREQ-MultiPlatform folder. If none, skip this step and proceed to apply Oracle Utilities Customer Care and Billing, else continue with the steps below.

### Applying Hot Fixes

**Note:** Java 8 JDK should be installed on the machine to use the command. Make sure to install the JDK that is supported for your platform.

1. Extract ..\CCB-V2.8.0.0-FW-Database-PREREQ-MultiPlatform\FW44030-HFix\db\_patch\_standalone.jar to any directory on your local machine under dbpatch\_tools folder.

#### UNIX

```
cd ../dbpatch_tools
jar xvf db_patch_standalone.jar
```

#### WINDOWS

```
cd c:\..\dbpatch_tools
jar xvf db_patch_standalone.jar
```

2. SET TOOLSBIN.

#### UNIX

```
export TOOLSBIN=../dbpatch_tools/bin
```

#### WINDOWS

```
SET TOOLSBIN=c:\..\dbpatch_tools\bin
```

3. Apply prerequisite Oracle Utilities Application Framework database single fixes from ..\CCB-V2.8.0.0-FW-Database-PREREQ-MultiPlatform\FW44030-HFix folder.

**UNIX**

- a. Change the permission of ouafDatabasePatch.sh tool.

```
chmod 755 ouafDatabasePatch.sh
```

- b. Run the ouafDatabasePatch.sh tool.

```
sh ouafDatabasePatch.sh (or) ./ ouafDatabasePatch.sh
```

**WINDOWS**

Run the ouafDatabasePatch.cmd tool.

```
ouafDatabasePatch.cmd
```

The utility prompts you to enter values for the parameters listed below:

- Enter the target database type (O/M/D) [O]: <O>
- Enter the username that owns the schema: <CISADM>
- Enter the password for the cisadm user: <CISADM Password>
- Enter the name of the Oracle Database Connection String:  
<DB\_Server:DBPORT/ORACLE\_SID>

## Installing Oracle Utilities Customer Care and Billing Database Component

Oracle Utilities Customer Care and Billing Database Component can be installed using OraDBI.java. While prior versions of the product have included OraDBI.exe, this is no longer supported going forward as this does not support latest functionality/features introduced in OraDBI.java. OraDBI.jar is delivered in directory jarfiles.

### Installing the Oracle Utilities Customer Care and Billing Database Component Using OraDBI.java

OraDBI.java is a new tool to install and upgrade database components. It can be run from UNIX or Windows machines that has the following installed:

- Oracle 19c
- Oracle 19c Client

Before installing the database component, make sure the below prerequisites are met.

- JDK 1.8
- Oracle Database
- Schema (such as CISADM) should exist in the database
- max\_string\_size is set to EXTENDED

To install the Oracle Utilities Customer Care and Billing v2.8.0.0.0:

1. Unzip CCB-V2.8.0.0.0-Oracle-Database-Multiplatform.zip package.
2. Set JAVA\_HOME, PATH, and CLASSPATH.

**UNIX:**

```
export JAVA_HOME=/scratch/software/jdk1.8.0_102/
export PATH=$JAVA_HOME/bin:$PATH
```

```
export CLASSPATH=../../FW-V4.4.0.3.0-Oracle- Database-Multiplatform/
FW/jarfiles/*
```

**WINDOWS:**

```
SET JAVA_HOME=C:\Program Files\Java\jdk1.8.0_101
SET PATH=%JAVA_HOME%\bin;%PATH%
SET CLASSPATH= C:\ FW-V4.4.0.3.0-Oracle-Database-
Multiplatform\FW\jarfiles\*
```

3. Run the following command from the command line or command prompt from ..\CCB\Upgrade\Install-Upgrade folder.

There are two options available to execute OraDBI.java

- Using interactive mode
- Using command on command line

**Using Interactive Mode:****UNIX:**

```
java -Xmx1500M com.oracle.ouaf.oem.install.OraDBI -p
<RW_USERPASS>,<R_USERPASS>
```

**WINDOWS:**

```
"C:\Program Files\Java\jdk1.8.0_101"\bin\java -Xmx1500M -cp C:\
FW-V4.4.0.3.0-Oracle-Database-Multiplatform\FW\jarfiles\*
com.oracle.ouaf.oem.install.OraDBI -p
<RW_USERPASS>,<R_USERPASS>
```

The utility prompts you to enter values for the parameters listed below:

- Enter the database server hostname:<SERVER NAME>
- Enter the database port number:<PORT>
- Enter the database name/SID:<DB NAME>
- Enter your database username:<CISADM>
- Enter your password for username CISADM:
- Enter the Oracle user with read-write privileges to Database Schema:<CISUSER>
- Enter your password for username CISUSER:
- Enter the Oracle user with read-only privileges to Database Schema:<CISREAD>
- Enter your password for username CISREAD:
- Enter the database role with read-write privileges to Database Schema:<CIS\_USER>
- Enter the database role with read-only privileges to Database Schema:<CIS\_READ>
- Enter the name of the target Schema where you want to install or upgrade:<CISADM>



**Using the Command Line:****UNIX:**

```
java -Xmx1500M com.oracle.ouaf.oem.install.OraDBI -d
jdbc:oracle:thin:@<DB_SERVER>:<PORT>/
<SID>,<DBUSER>,<DBPASS>,<RW_USER>,<R_USER>,<RW_USER_ROLE>,<R_US
ER_ROLE>,<DBUSER> -p <RW_USERPASS>,<R_USERPASS>
```

**WINDOWS:**

```
"C:\Program Files\Java\jdk1.8.0_101"\bin\java -Xmx1500M -cp C:\
FW-V4.4.0.3.0-Oracle-Database-Multiplatform\FW\jarfiles\*
com.oracle.ouaf.oem.install.OraDBI -d
jdbc:oracle:thin:@<DB_SERVER>:<PORT>/
<SID>,<DBUSER>,<DBPASS>,<RW_USER>,<R_USER>,<RW_USER_ROLE>,<R_US
ER_ROLE>,<DBUSER> -p <RW_USERPASS>,<R_USERPASS>
```

This process generates log files in the directory ..\CCB\Upgrade\Install-Upgrade\logs.

4. Make sure to check the log files for any errors.

**Note:** For OraDBI java, you may receive the following message in the display output or logs. These errors can be safely ignored and the process should proceed to completion.

```
-2016-05-23 16:31:38,315 [main] ERROR
(common.cryptography.KeyStoreWrapperFactory) The keystore file
'<filename>' does not exist....
```

...

This file is either provided by the property com.oracle.ouaf.system.keystore.file or expected to exist at the default file location null Attempting to use the legacy cryptography.

```
- 2016-05-23 16:31:38,566 [main] INFO (oem.install.OraDBI)
```

## Installing Oracle Utilities Customer Care and Billing Database Rollup

The previous versions of Oracle Utilities Customer Care and Billing included cdxpatch.exe programs for applying the database hot fixes. This is not supported from the current version. Starting Oracle Utilities Customer Care and Billing V2.8.0.0.0, use the ouafDatabasePatch.cmd or ouafDatabasePatch.sh. The new tool can be run from UNIX or Windows machines.

**Important!** Proceed with the steps in this section only if the installation package contains the CCB-V2.8.0.0.0-Database-Rollup-MultiPlatform folder.

Make sure Java 8 JDK is installed on the machine to use the commands. The JDK version that is supported for your platform should be installed.

**To apply Oracle Utilities Customer Care and Billing V28000 Rollup:**

1. Perform the steps 1 and 2 listed in the [Installing Framework Prerequisite Database Single Fixes](#) section.
2. Apply CCB 28000 Rollup from the ..\ CCB-V2.8.0.0.0-Database-Rollup-MultiPlatform\CCB28000-HFix folder.

**UNIX:**

- a. Change the permission of ouafDatabasePatch.sh tool.

```
chmod 755 ouafDatabasePatch.sh
```

- b. Run the ouafDatabasePatch.sh tool.

```
sh ouafDatabasePatch.sh or ./ ouafDatabasePatch.sh
```

**WINDOWS:**

- a. Run the ouafDatabasePatch.cmd tool.

```
ouafDatabasePatch.cmd
```

The utility prompts you to enter values for the parameters listed below:

- Enter the target database type (O/M/D) [O]: <O>
- Enter the username that owns the schema: <CISADM>
- Enter the password for the cisadm user: <CISADM Password>
- Enter the name of the Oracle Database Connection String:  
<DB\_Server:DBPORT/ORACLE\_SID>

**Tasks Performed by ORADBI**

The tasks performed by ORADBI are as below:

- Interacts with the user to collect information about the name of Oracle account that will own the application schema (example: CISADM), password of this account, and the name of the Oracle account that the application user will use (example: CISUSER), and the name of the Oracle account that will be assigned read-only privileges to the application schema (example: CISREAD).
- Verifies whether tablespace names already exist in the Storage.xml file (if not, the process will abort).
- Installs the schema, installs the system data, and configures security.
- Maintains upgrade log tables in the database.
- Updates release ID when the upgrade is completed successfully.
- If an error occurs while executing a SQL script or another utility, it logs and displays the error message and allows you to re-execute the current step. Log files OraDBI###.log are created in the same folder as OraDBI and contains all the SQL commands executed against the database along with the results. The log files are incremental so that the results are never overwritten. If warning messages are generated during the upgrade, OraDBI prompts the user at the end of the process. Users should check the log files to verify the warning messages.
- Warning messages are only alerts and do not necessary mean a problem exists.

- Stores the Schema owner and password in the feature configuration table. The password is stored in encrypted format.
- OraDBI can be executed by a non-schema owner.

## Post-installation Tasks

- [Enabling USER\\_LOCK Package](#)
- [Generating Database Statistics](#)

### Enabling USER\_LOCK Package

For the inbound web services to work the USER\_LOCK must be enabled at the database level. This is a one-time step. If this is not already enabled, please do so using the following steps.

1. Login as SYS user.
2. At the SQL prompt, run the following:  

```
@?/rdbms/admin/userlock.sql
```
3. Grant permission.  

```
grant execute on USER_LOCK to public;
```

Note that grant can also be made to the database user which the application connects to only instead of public. Example: cisuser

### Generating Database Statistics

During an install process new database objects may be added to the target database. Before starting to use the database, generate the complete statistics for these new objects by using the DBMS\_STATS package.

## Upgrade Install

This section describes how to upgrade the database components for Oracle Utilities Customer Care and Billing, including:

- [Copying and Decompressing Install Media](#)
- [Exclude Table/Index](#)
- [Grant Privilege to Database Roles](#)
- [Upgrading the CISADM Schema to v2.8.0.0](#)

### Copying and Decompressing Install Media

To copy and decompress the Oracle Utilities Customer Care and Billing database:

1. Download Oracle Utilities Application Framework V4.4.0.3.0 Oracle Database, Oracle Utilities Application Framework V4.4.0.3.0 Single Fix Prerequisite Database Rollup for CCB V2.8.0.0.0 (if there is any), Oracle Utilities Customer Care and Billing V2.8.0.0.0 Oracle Database and Oracle Utilities Customer Care and Billing V2.8.0.0.0 Single Fix Database Rollup MultiPlatform (if there is any) from the Oracle Software Delivery Cloud.

2. Copy FW-V4.4.0.3.0-Oracle-Database-Multiplatform, CCB-V2.8.0.0.0-FW-Database-PREREQ-MultiPlatform (if there is any), CCB-V2.8.0.0.0-Oracle-Database-Multiplatform and CCB-V2.8.0.0.0-Database-Rollup-MultiPlatform (if there is any) directories to your local machine. These files contain all the database components required to install the Oracle Utilities Application Framework and Customer Care and Billing database.

### Exclude Table/Index

To exclude an index or table during the upgrade process:

1. Edit the OraSchUpg.inp file in the Install-Upgrade directory.
2. Add the tables and indexes in the following format:

```
-INDEX: 'INDEX_NAME', 'INDEX_NAME'
-TABLE: 'TBALE1_NAME', 'TABLE2_NAME'
```

For example: To exclude the F1\_WEB\_SVC table, use the following:

```
-TABLE: 'F1_WEB_SVC'
```

If there are multiple tables, include them with separated commas.

```
-TABLES: 'TABLE-1', 'TABLE_2', 'TABLE_3'
```

Similarly for indexes:

```
-INDEX: ' F1C064S1'
```

### Grant Privilege to Database Roles

Before running the upgrade, make sure to grant the Create Synonym to the database read write (CIS\_USER) and read only (CIS\_READ) roles.

```
grant CREATE SYNONYM to CIS_USER;
grant CREATE SYNONYM to CIS_READ;
```

### Upgrading the CISADM Schema to v2.8.0.0.0

To upgrade to 2.8.0.0.0 from Oracle Utilities Customer Care and Billing 2.5.0.2 or below, run the following steps before running the blueprint. This is intended for huge table (s) due to changes in column(s) structure from CHAR to VARCHAR2 as part of Oracle Utilities Customer To Meter enhancement.

Below is the list of the affected columns.

---

UOM\_CD

---

FINAL\_UOM\_CD

---

GRAPH\_UOM\_CD

---

SQI\_CD

---

FINAL\_SQI\_CD

---

TOU\_CD

---

FINAL\_TOU\_CD

---

---

SVC\_TYPE\_CD

---

FINAL\_SQI

---

TOU\_GRP\_CD

---

EXT\_TRANSMIT\_ID

---

SP\_TYPE\_CD

---

ITEM\_TYPE\_CD

---

ITEM\_TYPE\_CD\_EQ

---

Below is a list of some tables that might have a high number of records.

---

CI\_ADJ\_CALC\_LN

---

CI\_BCHG\_READ

---

CI\_BCHG\_SQ

---

CI\_BCHG\_UP\_READ

---

CI\_BCHG\_UP\_SQ

---

CI\_BSEG\_CALC\_LN

---

CI\_BSEG\_ITEM

---

CI\_BSEG\_READ

---

CI\_REG

---

CI\_RR\_STAGE\_UP

---

CI\_TREND

---

CI\_BSEG\_SQ

---

CI\_BFCH\_TOUGRP

---

CI\_CVAL\_TMPL

---

CI\_SA\_CONTERM

---

CI\_TMAP\_TYPE

---

CI\_TOU\_GRP

---

CI\_TOU\_GRP\_L

---

CI\_DEP\_CTL\_ST

---

CI\_PAY\_ST

---

CI\_PAY\_TNDR\_ST

---

CI\_PAY\_TNDR\_ST\_CHAR

---

CI\_PEVT\_DTL\_ST

---

CI\_TNDR\_CTL

---

CI\_TNDR\_CTL\_ST

---

CI\_TNDR\_ST\_EXCP

---

**To upgrade the CISADM schema to V2.8.0.0.0:**

1. Rename the table(s) and corresponding indexes before running the upgrade.
2. Run the blueprint upgrade. This creates the replacement for the tables that were renamed which contains the new column structure that is in VARCHAR2(30) except for EXT\_TRANSMIT\_ID which should be VARCHAR(50).
3. Copy the data from the old table to the new table using INSERT /\*+APPEND\*/ but already trim the data.

This section assumes an existing Oracle Utilities Customer Care and Billing on top of Oracle Utilities Application Framework. The following upgrade paths are described:

- [Upgrading from V2.7.0.0.0, V2.7.0.1.0 or V2.7.0.3.0 to V2.8.0.0.0](#)
- [Upgrading from V2.6.0.0.0 or V2.6.0.1.0 to V2.8.0.0.0](#)
- [Upgrading from V2.5.0, V2.5.0.1, or V2.5.0.2 to V2.8.0.0.0](#)
- [Upgrading from V2.4.0.2 or V2.4.0.3 to V2.8.0.0.0](#)
- [Upgrading from V2.4.0.0 or V2.4.0.1 to V2.8.0.0.0](#)
- [Upgrading from V2.3.1.10 to V2.8.0.0.0](#)
- [Upgrading from V2.2.0.10 to V2.8.0.0.0](#)
- [Upgrading from V2.2.0.0.0 to V2.8.0.0.0](#)
- [Upgrading from V2.1.0.0.0 to 2.8.0.0.0](#)
- [Upgrading from V2.0.5.0.0 to 2.8.0.0.0](#)
- [Upgrading from V1.5.20 to V2.8.0.0.0](#)
- [Upgrading from V1.5.10 or V1.5.15 to V2.8.0.0.0](#)

**Upgrading from V2.7.0.0.0, V2.7.0.1.0 or V2.7.0.3.0 to V2.8.0.0.0**

You must install the Oracle Utilities Application Framework V4.4.0.3.0 and Oracle Utilities Application Framework V4.4.0.3.0 Database Single Fix Prerequisite Rollup for Oracle Utilities Customer Care and Billing V2.8.0.0.0 (if there's any) prior to Oracle Utilities Customer Care and Billing V2.8.0.0.0. The files for Oracle Utilities Application Framework installer is located in ..\FW-V4.4.0.3.0-Oracle-Database-Multiplatform\FW\Install-Upgrade folder.

**Upgrading the Database as Non-Schema Owner**

The product allows Non-Schema owners to run the database upgrade.

To perform upgrade, the non-schema owner must have the following database grants:

- grant connect, CREATE SESSION to <Non-Schema owner>;
- grant select on <Schema owner>.CI\_WFM to <Non-Schema owner>;
- grant select on <Schema owner>.CI\_WFM\_OPT to <Non-Schema owner>;

**Installing the Oracle Utilities Application Framework Database Component Using OraDBI.java**

For instructions, refer to [Installing the Oracle Utilities Application Framework Database Component Using OraDBI.java](#).

### Installing Prerequisite Database Single Fixes

For instructions, refer to [Installing Framework Prerequisite Database Single Fixes](#).

### Installing the Oracle Utilities Customer Care and Billing Database Component

For instructions, refer to [Installing Oracle Utilities Customer Care and Billing Database Component](#).

### Installing the Oracle Utilities Customer Care and Billing Database Rollup

For instructions, refer to [Installing Oracle Utilities Customer Care and Billing Database Rollup](#).

### Generating Database Statistics

During an install process new database objects may be added to the target database. Before starting to use the database, generate the complete statistics for these new objects by using the DBMS\_STATS package.

### Tasks Performed by ORADBI

For more information, refer to [Tasks Performed by ORADBI](#).

### Upgrading from V2.6.0.0.0 or V2.6.0.1.0 to V2.8.0.0.0

You must install the Oracle Utilities Application Framework V4.4.0.3.0 and Oracle Utilities Application Framework V4.4.0.3.0 Single Fix Prerequisite Database Rollup for CCB V2.8.0.0.0 (if there's any) prior to Oracle Utilities Customer Care and Billing V2.8.0.0.0. The files for Oracle Utilities Application Framework installer is located in ..\FW-V4.4.0.3.0-Oracle-Database-Multiplatform\FW\Install-Upgrade folder.

### Upgrading the Database as Non-Schema Owner

The product allows Non-Schema owners to run the database upgrade.

To perform upgrade, the non-schema owner must have the following database grants:

- grant connect, CREATE SESSION to <Non-Schema owner>;
- grant select on <Schema owner>.CI\_WFM to <Non-Schema owner>;
- grant select on <Schema owner>.CI\_WFM\_OPT to <Non-Schema owner>;

### Installing the Oracle Utilities Application Framework Database Component Using OraDBI.java

For instructions, refer to [Installing the Oracle Utilities Application Framework Database Component Using OraDBI.java](#).

### Installing Prerequisite Database Single Fixes

For instructions, refer to [Installing Framework Prerequisite Database Single Fixes](#).

### Installing the Oracle Utilities Customer Care and Billing Database Component

For instructions, refer to [Installing Oracle Utilities Customer Care and Billing Database Component](#).

**Installing the Oracle Utilities Customer Care and Billing Database Rollup**

For instructions, refer to [Installing Oracle Utilities Customer Care and Billing Database Rollup](#).

**Generating Database Statistics**

During an install process new database objects may be added to the target database. Before starting to use the database, generate the complete statistics for these new objects by using the DBMS\_STATS package.

**Tasks Performed by ORADBI**

For more information, refer to [Tasks Performed by ORADBI](#).

**Upgrading from V2.5.0, V2.5.0.1, or V2.5.0.2 to V2.8.0.0.0**

You must install the Oracle Utilities Application Framework V4.4.0.3.0 and Oracle Utilities Application Framework V4.4.0.3.0 Single Fix Prerequisite Database Rollup for CCB V2.8.0.0.0 (if there's any) prior to Oracle Utilities Customer Care and Billing 2.8.0.0.0. The files for Oracle Utilities Application Framework installer is located in ..\FW-V4.4.0.3.0-Oracle-Database-Multiplatform\FW\Install-Upgrade folder.

**Upgrading the Database as Non-Schema Owner**

The product allows non-schema owners to run the database upgrade.

To perform upgrade, the non-schema owner must have the following database grants:

- grant connect, CREATE SESSION to <Non-Schema owner>;
- grant select on <Schema owner>.CI\_WFM to <Non-Schema owner>;
- grant select on <Schema owner>.CI\_WFM\_OPT to <Non-Schema owner>;

**Installing the Oracle Utilities Application Framework Database Component Using OraDBI.java**

For instructions, refer to [Installing the Oracle Utilities Application Framework Database Component Using OraDBI.java](#).

**Installing Prerequisite Database Single Fixes**

For instructions, refer to [Installing Framework Prerequisite Database Single Fixes](#).

**Installing the Oracle Utilities Customer Care and Billing Database Component**

For instructions, refer to [Installing Oracle Utilities Customer Care and Billing Database Component](#).

**Installing the Oracle Utilities Customer Care and Billing Database Rollup**

For instructions, refer to [Installing Oracle Utilities Customer Care and Billing Database Rollup](#).

**Generating Database Statistics**

During an install process new database objects may be added to the target database. Before starting to use the database, generate the complete statistics for these new objects by using the DBMS\_STATS package.



**ORADBI Performs the Following Tasks**

For more information, refer to [Tasks Performed by ORADBI](#).

**Upgrading from V2.4.0.2 or V2.4.0.3 to V2.8.0.0.0**

You must install the Oracle Utilities Application Framework V4.4.0.3.0 and Oracle Utilities Application Framework V4.4.0.3.0 Single Fix Prerequisite Database Rollup for CCB V2.8.0.0.0 (if there's any) prior to Oracle Utilities Customer Care and Billing 2.8.0.0.0. The files for Oracle Utilities Application Framework installer is located in ..\FW-V4.4.0.3.0-Oracle-Database-Multiplatform\FW\Install-Upgrade folder.

**Upgrading the Database as Non-Schema Owner**

The product allows Non-Schema owners to run the database upgrade.

To perform upgrade, the non-schema owner must have the following database grants:

- grant connect, CREATE SESSION to <Non-Schema owner>;
- grant select on <Schema owner>.CI\_WFM to <Non-Schema owner>;
- grant select on <Schema owner>.CI\_WFM\_OPT to <Non-Schema owner>;

**Installing the Oracle Utilities Application Framework Database Component Using OraDBI.java**

For instructions, refer to [Installing the Oracle Utilities Application Framework Database Component Using OraDBI.java](#).

**Installing Prerequisite Database Single Fixes**

For instructions, refer to [Installing Framework Prerequisite Database Single Fixes](#).

**Installing the Oracle Utilities Customer Care and Billing Database Component**

For instructions, refer to [Installing Oracle Utilities Customer Care and Billing Database Component](#).

**Installing the Oracle Utilities Customer Care and Billing Database Rollup**

For instructions, refer to [Installing Oracle Utilities Customer Care and Billing Database Rollup](#).

**Generating Database Statistics**

During an install process new database objects may be added to the target database. Before starting to use the database, generate the complete statistics for these new objects by using the DBMS\_STATS package.

**ORADBI Performs the Following Tasks**

For more information, refer to [Tasks Performed by ORADBI](#).

**Upgrading from V2.4.0.0 or V2.4.0.1 to V2.8.0.0.0**

This section describes the steps for upgrading Oracle Utilities Customer Care and Billing V2.4.0.0 to V2.8.0.0.0 or from V2.4.0.1 to V2.8.0.0.0.

The files for this upgrade are located in the following directory: ..\CCB-V2.8.0.0.0-Oracle-Database-Multiplatform\CCB\Upgrade\Upgrade-From-v2400-v2401\.

1. Apply Framework version 4.2.0.2 and Oracle Utilities Customer Care and Billing 2.4.0.2 from Step\_1\_Upgrade\_to\_v2402 folder:

**Note:** Make sure to run OraDBI.exe from a Window 32-bit or 64-bit desktop that has the Oracle 19c 32-bit client. The database should already be listed in the local file tnsnames.ora.

- a. Apply Framework V4.2.0.2.0 by running ORADBI.exe from the \01\_FW420\_SP2 folder.
- b. Apply Framework V4.2.0.2.0 Rollup by running CDXPATCH.exe from the \02\_FW420\_SP2\_Rollup folder.
- c. Execute the CCB2402\_Trim\_SRCH\_CHAR\_VAL.sql script from \03\_CCB\_TRIM\_SRCH\_VAL folder.

- a. Login as CISADM user.
- b. On SQL prompt, run CCB2402\_Trim\_SRCH\_CHAR\_VAL.sql.

```
@CCB2402_Trim_SRCH_CHAR_VAL.sql
```

This generates a file called CCB\_TRIM\_SRCH\_CHAR\_VAL.sql.

- c. Run the generated CCB\_TRIM\_SRCH\_CHAR\_VAL.sql script.

```
@CCB_TRIM_SRCH_CHAR_VAL.sql
```

- d. Apply Customer Care and Billing 2.4.0 Service Pack 2 by running the ORADBI.exe from the \04\_CCB240\_SP2 folder.
- e. Run the FW4202\_Trim\_SRCH\_CHAR\_VAL.sql script from \05\_FW\_TRIM\_SRCH\_VAL folder.

- a. Login as CISADM user.
- b. On SQL prompt, run FW4202\_Trim\_SRCH\_CHAR\_VAL.sql.

```
@FW4202_Trim_SRCH_CHAR_VAL.sql
```

This will generate a file called TRIM\_SRCH\_CHAR\_VAL.sql.

- c. Run the generated TRIM\_SRCH\_CHAR\_VAL.sql script.

```
@TRIM_SRCH_CHAR_VAL.sql
```

- f. Enable USER\_LOCK Package.

For in-bound Web services to work the USER\_LOCK must be enabled at the database level. This is a one-time step. If this is not already enabled, please do so using the following steps:

- a. Login as SYS user. On SQL prompt run:

```
@?/rdbms/admin/userlock.sql
```

- b. Grant permission by running the following SQL:

```
grant execute on USER_LOCK to public;
```

Note that grant can also be made to the database user which the application connects to only instead of to public. For example: cisuser.

- Upgrade to Oracle Utilities Customer Care and Billing 2.8.0.0.0 by following the steps in the [Upgrading from V2.4.0.2 or V2.4.0.3 to V2.8.0.0.0](#) section.

### Upgrading from V2.3.1.10 to V2.8.0.0.0

You must install the Oracle Utilities Application Framework V4.4.0.3.0 and Oracle Utilities Application Framework V4.4.0.3.0 Single Fix Prerequisite Database Rollup for CCB V2.8.0.0.0 (if there's any) prior to Oracle Utilities Customer Care and Billing 2.8.0.0.0. The files for Oracle Utilities Application Framework installer is located in ..\FW-V4.4.0.3.0-Oracle-Database-Multiplatform\FW\Install-Upgrade folder.

**Note:** There is a known issue with CI\_BILL and CI\_PAY\_EVENT tables with high volume of data; hence please follow steps documented in Doc ID 2153482.1 (My Oracle Support), prior to running the upgrade.

### Upgrading the Database as Non-Schema Owner

The product allows Non-Schema owners to run the database upgrade.

To perform upgrade, the non-schema owner must have the following database grants:

- grant connect, CREATE SESSION to <Non-Schema owner>;
- grant select on <Schema owner>.CI\_WFM to <Non-Schema owner>;
- grant select on <Schema owner>.CI\_WFM\_OPT to <Non-Schema owner>;

### Installing the Oracle Utilities Application Framework Database Component Using OraDBI.java

For instructions, refer to [Installing the Oracle Utilities Application Framework Database Component Using OraDBI.java](#).

### Optional: Execute CCB2401\_BpSchema2.SQL

This step is recommended to improve the performance of the upgrade process.

Before executing this script, verify the script and note that these operations are long-running and the script specifies a default level of parallelism that can be tailored to the implementation's hardware. Also, note that CCB2401\_BpSchema2.SQL can be executed well in advance of the upgrade to CCB 2.4.0.2 as these changes are compatible with Oracle Utilities Customer Care and Billing 2.2.0 and 2.3.1:

1. Open a command prompt.
2. Change directory to ..\CCB-V2.8.0.0.0-Oracle-Database-Multiplatform\CCB\Upgrade\Install-Upgrade.
3. Connect to SQLPLUS.
4. Execute the file as follows:

```
@CCB2401_BpSchema2.SQL
```

### Optional: Execute CCB2401\_BpSchema3.SQL

This step is recommended to improve the performance of the upgrade process.

Before executing this script, please verify the script and make a note that these operations are long-running and the script specifies a default level of parallelism that can be tailored to the implementation's hardware.

1. Open a command prompt.
2. Change directory to ..\CCB-V2.8.0.0-Oracle-Database-Multiplatform\CCB\Upgrade\Install-Upgrade.
3. Connect to SQLPLUS.
4. Execute the file as follows:
 

```
@CCB2401_BpSchema3.SQL
```

### Installing Prerequisite Database Single Fixes

For instructions, refer to [Installing Framework Prerequisite Database Single Fixes](#).

### Installing the Oracle Utilities Customer Care and Billing Database Component

For instructions, refer to [Installing Oracle Utilities Customer Care and Billing Database Component](#).

### Installing the Oracle Utilities Customer Care and Billing Database Rollup

For instructions, refer to [Installing Oracle Utilities Customer Care and Billing Database Rollup](#).

### ORADBI Performs the Following Tasks

For more information, refer to [Tasks Performed by ORADBI](#).

### Execute CCB2401\_APDATA1.sql

Before executing this script, please verify the script and make a note that these SQLs can be run in chunks across multiple sqlplus sessions in parallel. The execution process below explains how to run the script at once.

1. Open a command prompt.
2. Change directory to ..\CCB-V2.8.0.0-Oracle-Database-Multiplatform\CCB\Upgrade\Install-Upgrade.
3. Connect to SQLPLUS.
4. Execute the file as follows:
 

```
@CCB2401_APDATA1.sql
```

### Installing the upgrade script to trim the SRCH\_CHAR\_VAL column on the char tables

1. Login as CISADM user.
2. On SQL prompt, run FW4202\_Trim\_SRCH\_CHAR\_VAL.sql from the ..\FW-V4.4.0.3.0-Oracle-Database-Multiplatform\FW\Install-Upgrade directory.
 

```
@FW4202_Trim_SRCH_CHAR_VAL.sql
```

This generates a file called TRIM\_SRCH\_CHAR\_VAL.sql.

3. Run the generated TRIM\_SRCH\_CHAR\_VAL.sql script.
 

```
@TRIM_SRCH_CHAR_VAL.sql
```

### Enabling USER\_LOCK Package

For In-bound web services to work the USER\_LOCK must be enabled at the database level. This is a one-time step. If this is not already enabled please do so using the following steps.

1. Login as SYS user
2. On SQL prompt run:
 

```
@?/rdbms/admin/userlock.sql
```
3. Grant permission by running the below SQL:
 

```
grant execute on USER_LOCK to public;
```

Please note that grant can also be made to the database user which the application connects to only instead of to public. For example: cisuser

### Generating Database Statistics

During an install process new database objects may be added to the target database. Before starting to use the database, generate the complete statistics for these new objects by using the DBMS\_STATS package.

### Upgrading from V2.2.0.10 to V2.8.0.0.0

This section describes the steps for upgrading Oracle Utilities Customer Care and Billing V2.2.0.10 to V2.8.0.0.0. The files for this upgrade are located in the following directory:

```
..\CCB-V2.8.0.0.0-Oracle-Database-Multiplatform\CCB\Upgrade\Upgrade-From-v210-v220\From-v220-Upgrade-to-v28000.
```

**Note:** Make sure to run OraDBI.exe from a Window 32-bit or 64-bit desktop that has the Oracle 19c 32-bit client. The database should already be listed in the local file tnsnames.ora.

1. Apply Oracle Utilities Application Framework V4.2.0.2 from the \Step\_2\_Upgrade\_to\_v2402 folder:
  - a. Apply Framework version 4.2.0 Service Pack 2 by running OraDBI.exe from the \01\_FW420\_SP2 folder.
  - b. Apply Framework version 4.2.0 Service Pack 2 rollup by running CDXPATCH.exe from the \02\_FW420\_SP2\_Rollup folder.
2. Optional: Execute CCB2401\_BpSchema2.SQL
 

This step is recommended to improve the performance of the upgrade process. Refer to the [Upgrading from V2.3.1.10 to V2.8.0.0.0](#) section on how to execute this step.
3. Optional: Execute CCB2401\_BpSchema3.SQL
 

This step is recommended to improve the performance of the upgrade process. Refer to the [Upgrading from V2.3.1.10 to V2.8.0.0.0](#) section on how to execute this step.
4. Installing the upgrade script to trim the SRCH\_CHAR\_VAL column on the char tables. Execute the CCB2402\_Trim\_SRCH\_CHAR\_VAL.sql
 

Refer to the [Upgrading from V2.4.0.0 or V2.4.0.1 to V2.8.0.0.0](#) section on how to execute this step.
5. Apply Customer Care and Billing 2.4.0 Service Pack 2 by running the OraDBI.exe from the \04\_CCB240\_SP2 folder.

6. Run CCB2401\_APDATA1.sql.  
Before executing this script, please verify the script and make a note that these Refer to the [Upgrading from V2.3.1.10 to V2.8.0.0.0](#) section on how to execute this step.
7. Installing the upgrade script to trim the SRCH\_CHAR\_VAL column on the char tables. Execute the FW4202\_Trim\_SRCH\_CHAR\_VAL.sql.  
Refer to the [Upgrading from V2.4.0.0 or V2.4.0.1 to V2.8.0.0.0](#) section on how to execute this step.
8. Enable USER\_LOCK Package  
Refer to the [Upgrading from V2.3.1.10 to V2.8.0.0.0](#) section on how to execute this step.
9. Upgrade to Oracle Utilities Customer Care and Billing 2.8.0.0.0 by following the steps in the [Upgrading from V2.4.0.2 or V2.4.0.3 to V2.8.0.0.0](#) section.

### Upgrading from V2.2.0.0.0 to V2.8.0.0.0

This section describes the steps for upgrading Oracle Utilities Customer Care and Billing V2.2.0.0.0 to V2.8.0.0.0. The files for this upgrade are located in the following directory:

```
..\CCB-V2.8.0.0.0-Oracle-Database-Multiplatform\CCB\Upgrade\ Upgrade-From-v210-v220\ From-v220-Upgrade-to-v28000.
```

**Note:** For steps 1 and 2, be sure to run OraDBI.exe from a Window 32-bit or 64-bit desktop that has the Oracle 19c 32-bit client. The database should already be listed in the local file tnsnames.ora.

1. Apply Oracle Utilities Application Framework V2.2.0 and Oracle Utilities Customer Care and Billing 2.2.0 Service Packs from the \Step\_1\_Apply\_v220\_SP10 folder:
  - a. Apply Oracle Utilities Application Framework V2.2.0 Service Pack 1 by running CDXDBI.exe from the \01\_FW22\_SP1 folder.
  - b. Apply Oracle Utilities Application Framework V2.2.0 Service Pack 18 by running CDXPATCH.exe from the \02\_FW\_220\_SP18 folder.  
**Note:** Use the -q parameter to prevent CDXPATCH tool from prompting to apply the patch for every patch included in the service pack.
  - c. Apply Oracle Utilities Application Framework V220 Service Pack 18 Rollup by running the CDXPATCH.exe from the \03\_FW\_220\_SP18\_Rollup folder.  
**Note:** Use the -q parameter to prevent CDXPATCH tool from prompting to apply the patch for every patch included in the service pack.
  - d. Apply Oracle Utilities Customer Care and Billing 2.2.0 Service Pack 10 by running the CDXPATCH.exe from the \04\_CCB\_220\_SP10 folder.
2. Apply Oracle Utilities Application Framework V4.2.0 Service Pack 2 and Oracle Utilities Customer Care and Billing 2.4.0 Service Packs 2 from the \Step\_2\_Upgrade\_to\_v2402 folder:
  - a. Apply Oracle Utilities Application Framework V4.2.0 Service Pack 2 by running OraDBI.exe from the \01\_FW420\_SP2 folder.

- b. Apply Framework version 4.2.0 Service Pack 2 rollup by running CDXPATCH.exe from the \02\_FW420\_SP2\_Rollup folder.
  - c. Optional: Execute CCB2401\_BpSchema2.SQL  
This step is recommended to improve the performance of the upgrade process. Refer to the [Upgrading from V2.3.1.10 to V2.8.0.0.0](#) section about how to execute this step.
  - d. Optional: Run CCB2401\_BpSchema3.SQL  
This step is recommended to improve the performance of the upgrade process. Refer to the [Upgrading from V2.3.1.10 to V2.8.0.0.0](#) section on how to execute this step.
  - e. Installing the upgrade script to trim the SRCH\_CHAR\_VAL column on the char tables.
  - f. Run CCB2402\_Trim\_SRCH\_CHAR\_VAL.sql.  
Refer to the [Upgrading from V2.4.0.0 or V2.4.0.1 to V2.8.0.0.0](#) section on how to execute this step.
  - g. Apply Oracle Utilities Customer Care and Billing 2.4.0 Service Pack 2 by running the OraDBI.exe from the \04\_CCB240\_SP2 folder.
  - h. Run CCB2401\_APDATA1.sql.  
Before executing this script, please verify the script and make a note that these Refer to the [Upgrading from V2.3.1.10 to V2.8.0.0.0](#) section on how to run this step.
  - i. Installing the upgrade script to trim the SRCH\_CHAR\_VAL column on the char tables.  
Run the FW4202\_Trim\_SRCH\_CHAR\_VAL.sql.  
Refer to the [Upgrading from V2.4.0.0 or V2.4.0.1 to V2.8.0.0.0](#) section on how to run this step.
  - j. Enable USER\_LOCK Package.  
Refer to the [Upgrading from V2.3.1.10 to V2.8.0.0.0](#) section on how to run this step.
3. Upgrade to Oracle Utilities Customer Care and Billing 2.8.0.0.0 by following the steps in the [Upgrading from V2.4.0.2 or V2.4.0.3 to V2.8.0.0.0](#) section.

### Upgrading from V2.1.0.0.0 to 2.8.0.0.0

This section describes the steps for upgrading Oracle Utilities Customer Care and Billing V2.1.0.0.0 to V2.8.0.0.0. The files for this upgrade are located in the following directory: ..\CCB-V2.8.0.0.0-Oracle-Database-Multiplatform\CCB\Upgrade\Upgrade-From-v210-v220\From-v210-Upgrade-to-v28000.

**Note:** For steps 1-4, be sure to run OraDBI.exe from a Window 32-bit or 64-bit desktop that has the Oracle 19c 32-bit client. The database should already be listed in the local file tnsnames.ora

1. Apply the Oracle Utilities Application Framework 2.1.0 and Oracle Utilities Customer Care and Billing 2.1.0 current rollups from the \Step\_1\_Apply\_210\_Current\_Rollup folder:

- a. Apply the Oracle Utilities Application Framework V2.1.0 current rollup by running CDXPATCH.exe from the \01\_FW210SP7\_plus\_Rollup folder.
- b. Apply the Oracle Utilities Customer Care and Billing V2.1.0 current rollup by running CDXPATCH.exe from the \02\_CCB210SP7\_plus\_Rollup folder.
2. Upgrade to Oracle Utilities Application Framework V2.2.0 and Oracle Utilities Customer Care and Billing V2.2.0 by running CDXDDBI.exe from the \Step\_2\_Upgrade\_to\_v220\Upgrade-Install folder.
3. Apply Oracle Utilities Application Framework V2.2.0 and Oracle Utilities Customer Care and Billing 2.2.0 Service Packs from the \Step\_3\_Apply\_v220\_SP10 folder.
  - a. Apply Oracle Utilities Application Framework version 2.2.0 Service Pack 1 by running CDXDDBI.exe from the \01\_FW22\_SP1 folder.
  - b. Apply Framework version 2.2.0 Service Pack 18 by running CDXPATCH.exe from the \02\_FW\_220\_SP18 folder.

**Note:** Use the -q parameter to prevent CDXPATCH tool from prompting to apply the patch for every patch included in the service pack.

- c. Apply Framework version 220 Service Pack 18 Rollup by running the CDXPATCH.exe from the \03\_FW\_220\_SP18\_Rollup folder.
 

**Note:** Use the -q parameter to prevent CDXPATCH tool from prompting to apply the patch for every patch included in the service pack.
- d. Apply Customer Care and Billing 2.2.0 Service Pack 10 by running the CDXPATCH.exe from the \04\_CCB\_220\_SP10 folder.
4. Apply Framework version 4.2.0 Service Pack 2 and Customer Care and Billing 2.4.0 Service Packs 2 from the \Step\_4\_Upgrade\_to\_v2402 folder:
  - a. Apply Framework version 4.2.0 Service Pack 2 by running OraDDBI.exe from the \01\_FW420\_SP2 folder.
  - b. Apply Framework version 4.2.0 Service Pack 2 rollup by running CDXPATCH.exe from the \02\_FW420\_SP2\_Rollup folder.
  - c. Optional: Execute CCB2401\_BpSchema2.SQL.
 

This step is recommended to improve the performance of the upgrade process. Refer to the [Upgrading from V2.3.1.10 to V2.8.0.0.0](#) section on how to execute this step.
  - d. Optional: Execute CCB2401\_BpSchema3.SQL.
 

This step is recommended to improve the performance of the upgrade process. Refer to the [Upgrading from V2.3.1.10 to V2.8.0.0.0](#) section on how to execute this step.
  - e. Installing the upgrade script to trim the SRCH\_CHAR\_VAL column on the char tables.

Execute CCB2402\_Trim\_SRCH\_CHAR\_VAL.sql.

Refer to the [Upgrading from V2.4.0.0 or V2.4.0.1 to V2.8.0.0.0](#) section on how to execute this step.



- f. Apply Customer Care and Billing 2.4.0 Service Pack 2 by running the OraDBI.exe from the \04\_CCB240\_SP2 folder.
  - g. Execute CCB2401\_APDATA1.sql.  
Before executing this script, please verify the script and make a note that these Refer to the [Upgrading from V2.3.1.10 to V2.8.0.0.0](#) section on how to execute this step.
  - h. Installing the upgrade script to trim the SRCH\_CHAR\_VAL column on the char tables.  
Execute the FW4202\_Trim\_SRCH\_CHAR\_VAL.sql.  
Refer to the [Upgrading from V2.4.0.0 or V2.4.0.1 to V2.8.0.0.0](#) section on how to execute this step.
  - i. Enable USER\_LOCK Package  
Refer to the [Upgrading from V2.3.1.10 to V2.8.0.0.0](#) section on how to execute this step.
5. Upgrade to Oracle Utilities Customer Care and Billing 2.8.0.0.0 by following the steps in the [Upgrading from V2.4.0.2 or V2.4.0.3 to V2.8.0.0.0](#) section.

### Upgrading from V2.0.5.0.0 to 2.8.0.0.0

This section describes the steps for upgrading Oracle Utilities Customer Care and Billing V2.0.5.0.0 to V2.8.0.0.0. The files for this upgrade are located in the following directory:

```
..\CCB-V2.8.0.0.0-Oracle-Database-Multiplatform\CCB\Upgrade\Upgrade-From-v205\
```

**Note:** For steps 1-5, be sure to run OraDBI.exe from a Window 32-bit or 64-bit desktop that has the Oracle 19c 32-bit client. The database should already be listed in the local file tnsnames.ora.

1. Upgrade to Customer Care and Billing 2.1.0 by running CDXDDBI.exe from \Step\_1\_Upgrade\_to\_v210\Upgrade-Install folder.
2. Apply the Framework 2.1.0 and Customer Care and Billing 2.1.0 current rollups from the \Step\_2\_Apply\_210\_Current\_Rollup folder:
  - a. Apply the Framework V2.1.0 current rollup by running CDXPATCH.exe from the \01\_FW210SP7\_plus\_Rollup folder.
  - b. Apply the Customer Care and Billing V2.1.0 current rollup by running CDXPATCH.exe from the \02\_CCB210SP7\_plus\_Rollup folder.
3. Upgrade to Framework V2.2.0 and Customer Care and Billing V2.2.0 by running CDXDDBI.exe from the \Step\_3\_Upgrade\_to\_v220\Upgrade-Install folder.
4. Apply Framework V2.2.0 and Customer Care and Billing 2.2.0 Service Packs from the \Step\_4\_Apply\_v220\_SP10 folder:
  - a. Apply Framework V2.2.0 Service Pack 1 by running CDXDDBI.exe from the \01\_FW22\_SP1 folder.
  - b. Apply Framework V2.2.0 Service Pack 18 by running CDXPATCH.exe from the \02\_FW\_220\_SP18 folder.

**Note:** Use the -q parameter to prevent CDXPATCH tool from prompting to apply the patch for every patch included in the service pack.

- c. Apply Framework version 220 Service Pack 18 Rollup by running the CDXPATCH.exe from the \03\_FW\_220\_SP18\_Rollup folder.  
**Note:** Use the -q parameter to prevent CDXPATCH tool from prompting if you would like to apply the patch for every patch included in the service pack.
- d. Apply Customer Care and Billing 2.2.0 Service Pack 10 by running the CDXPATCH.exe from the \04\_CCB\_220\_SP10 folder.
5. Apply Framework version 4.2.0 Service Pack 2 and Customer Care and Billing 2.4.0 Service Pack 2 from the \Step\_5\_Upgrade\_to\_v2402 folder:
  - a. Apply Framework version 4.2.0 Service Pack 2 by running OraDBI.exe from the \01\_FW420\_SP2 folder.
  - b. Apply Framework version 4.2.0 Service Pack 2 rollup by running CDXPATCH.exe from the \02\_FW420\_SP2\_Rollup folder.
  - c. Optional: Execute CCB2401\_BpSchema2.SQL  
This step is recommended to improve the performance of the upgrade process. Refer to the [Upgrading from V2.3.1.10 to V2.8.0.0.0](#) section on how to execute this step.
  - d. Optional: Execute CCB2401\_BpSchema3.SQL  
This step is recommended to improve the performance of the upgrade process. Refer to the [Upgrading from V2.3.1.10 to V2.8.0.0.0](#) section on how to execute this step.
  - e. Installing the upgrade script to trim the SRCH\_CHAR\_VAL column on the char tables.  
Execute the CCB2402\_Trim\_SRCH\_CHAR\_VAL.sql  
Refer to the [Upgrading from V2.4.0.0 or V2.4.0.1 to V2.8.0.0.0](#) section on how to execute this step.
  - f. Apply Customer Care and Billing 2.4.0 Service Pack 2 by running the OraDBI.exe from the \04\_CCB240\_SP2 folder.
  - g. Execute CCB2401\_APDATA1.sql  
Before executing this script, please verify the script and make a note that these Refer to the [Upgrading from V2.4.0.0 or V2.4.0.1 to V2.8.0.0.0](#) section on how to execute this step.
  - h. Installing the upgrade script to trim the SRCH\_CHAR\_VAL column on the char tables.  
Execute the FW4202\_Trim\_SRCH\_CHAR\_VAL.sql  
Refer to the [Upgrading from V2.4.0.0 or V2.4.0.1 to V2.8.0.0.0](#) section on how to execute this step.
  - i. Enable USER\_LOCK Package  
Refer to the [Upgrading from V2.3.1.10 to V2.8.0.0.0](#) section on how to execute this step.
6. Upgrade to Oracle Utilities Customer Care and Billing 2.8.0.0.0 by following the steps in the [Upgrading from V2.4.0.2 or V2.4.0.3 to V2.8.0.0.0](#) section.

## Upgrading from V1.5.20 to V2.8.0.0.0

This section describes the steps for upgrading Oracle Utilities Customer Care and Billing V1.5.20 to V2.8.0.0.0. The files for this upgrade are located in the following directory:

..\CCB-V2.8.0.0.0-Oracle-Database-Multiplatform\CCB\Upgrade\Upgrade-From-v1.5.10-v1.5.15\

**Note:** For steps 1-7, be sure to run OraDBI.exe from a Window 32-bit or 64-bit desktop that has the Oracle 19c 32-bit client. The database should already be listed in the local file tnsnames.ora.

1. Apply Customer Care and Billing 1.5.20 Service Pack 1 by running CDXPATCH.exe from \Step\_2\_Apply\_ServicePack\_v15201 folder.
2. Upgrade to Customer Care and Billing 2.0.5 by executing the following steps from \Step\_3\_Upgrade\_to\_v205\Upgrade-Install folder.
  - a. **Pre-Install:** Run CDXDBI.exe from \01\_Pre-Install Folder. During this process, Owner Flag information will be upgraded from CI to C1 or F1 on system data.
  - b. **Install:** Run CDXDBI.exe from \02\_Install Folder. This process will complete upgrade of rest of the system data to CCB V2.0.5.
3. Upgrade to Customer Care and Billing 2.1.0 by running CDXDBI.exe from \Step\_4\_Upgrade\_to\_v210\Upgrade-Install folder.
4. Apply the Framework 2.1.0 and Customer Care and Billing 2.1.0 current rollups from the \Step\_5\_Apply\_210\_Current\_Rollup folder:
  - a. Apply the Framework version 2.1.0 current rollup by running CDXPATCH.exe from the \01\_FW210SP7\_plus\_Rollup folder.
  - b. Apply the Customer Care and Billing version 2.1.0 current rollup by running CDXPATCH.exe from the \02\_CCB210SP7\_plus\_Rollup folder.
5. Upgrade to Framework version 2.2.0 and Customer Care and Billing version 2.2.0 by running CDXDBI.exe from the \Step\_6\_Upgrade\_to\_v220\Upgrade-Install folder.
6. Apply Framework version 2.2.0 and Customer Care and Billing 2.2.0 Service Packs from the \Step\_7\_Apply\_v220\_SP10 folder:
  - a. Apply Framework version 2.2.0 Service Pack 1 by running CDXDBI.exe from the \01\_FW22\_SP1 folder.
  - b. Apply Framework version 2.2.0 Service Pack 18 by running CDXPATCH.exe from the \02\_FW\_220\_SP18 folder.
 

**Note:** Use the -q parameter to prevent CDXPATCH tool from prompting to apply the patch for every patch included in the service pack.
  - c. Apply Framework version 220 Service Pack 18 Rollup by running the CDXPATCH.exe from the \03\_FW\_220\_SP18\_Rollup folder.
 

**Note:** Use the -q parameter to prevent CDXPATCH tool from prompting to apply the patch for every patch included in the service pack.
  - d. Apply Customer Care and Billing 2.2.0 Service Pack 10 by running the CDXPATCH.exe from the \04\_CCB\_220\_SP10 folder.

7. Apply Framework version 4.2.0 Service Pack 2 and Customer Care and Billing 2.4.0 Service Packs 2 from the \Step\_8\_Upgrade\_to\_v2402 folder:
  - a. Apply Framework version 4.2.0 Service Pack 2 by running OraDBI.exe from the \01\_FW420\_SP2 folder.
  - b. Apply Framework version 4.2.0 Service Pack 2 rollup by running CDXPATCH.exe from the \02\_FW420\_SP2\_Rollup folder.
  - c. Optional: Execute CCB2401\_BpSchema2.SQL  
This step is recommended to improve the performance of the upgrade process. Refer to the [Upgrading from V2.3.1.10 to V2.8.0.0.0](#) section on how to execute this step.
  - d. Optional: Execute CCB2401\_BpSchema3.SQL  
This step is recommended to improve the performance of the upgrade process. Refer to the [Upgrading from V2.3.1.10 to V2.8.0.0.0](#) section on how to execute this step.
  - e. Installing the upgrade script to trim the SRCH\_CHAR\_VAL column on the char tables.  
Execute the CCB2402\_Trim\_SRCH\_CHAR\_VAL.sql  
Refer to the [Upgrading from V2.4.0.0 or V2.4.0.1 to V2.8.0.0.0](#) section on how to execute this step.
  - f. Apply Customer Care and Billing 2.4.0 Service Pack 2 by running the OraDBI.exe from the \04\_CCB240\_SP2 folder.
  - g. Execute CCB2401\_APDATA1.sql  
Before executing this script, please verify the script and make a note that these Refer to the [Upgrading from V2.3.1.10 to V2.8.0.0.0](#) section on how to execute this step.
  - h. Installing the upgrade script to trim the SRCH\_CHAR\_VAL column on the char tables.  
Execute the FW4202\_Trim\_SRCH\_CHAR\_VAL.sql  
Refer to the [Upgrading from V2.4.0.0 or V2.4.0.1 to V2.8.0.0.0](#) section on how to execute this step.
  - i. Enable USER\_LOCK Package  
Refer to the [Upgrading from V2.3.1.10 to V2.8.0.0.0](#) section on how to execute this step.
8. Upgrade to Oracle Utilities Customer Care and Billing 2.8.0.0.0 by following the steps in the [Upgrading from V2.4.0.2 or V2.4.0.3 to V2.8.0.0.0](#) section.

### **Upgrading from V1.5.10 or V1.5.15 to V2.8.0.0.0**

This section describes the steps for upgrading Oracle Utilities Customer Care and Billing V1.5.10 or V1.5.15 to V2.8.0.0.0. The files for this upgrade are located in the following directory:

```
..\CCB-V2.8.0.0.0-Oracle-Database-Multiplatform\CCB\Upgrade\Upgrade-From-v1.5.10-v1.5.15\
```

**Note:** For steps 1-8, be sure to run OraDBI.exe from a Window 32-bit or 64-bit desktop that has the Oracle 19c 32-bit client. The database should already be listed in the local file tnsnames.ora.

1. Upgrade to Customer Care and Billing 1.5.20 by executing the steps below from \Step\_1\_Upgrade\_to\_v1520\Upgrade-Install folder.

#### a. Pre-Install Steps

The clean-up scripts for each task consist of a "select" SQL and a "delete" SQL script. The "select" SQL script when executed will display the data that will be deleted by the "delete" SQL script. All the clean-up scripts spool their results in output files that have same names as the scripts but with an ".out" extension.

To execute these scripts, users must log in as a database user with delete privileges on the CC&B schema using SQLPLUS.

1. Open a command prompt.
2. Change directory to ..\01\_Pre-Install Folder.
3. Connect to SQLPLUS.
4. Execute the file as follows:

```
@ delete_mdfl.sql.sql
@ delete_tddrl.sql
@ delete_tdsrt.sql
@ delete_tde.sql
```

Users must “commit” the data cleanup transaction explicitly and roll it back if the script fails for some reason.

The following scripts are included in the \01\_Pre-Install folder:

- select\_mdfl.sql and delete\_mdfl.sql
- select\_tddrl.sql and delete\_tddrl.sql
- select\_tdsrt.sql and delete\_tdsrt.sql
- select\_tde.sql and delete\_tde.sql

After completion of this follow the Install steps below.

#### b. Install Steps

Upgrade to Customer Care and Billing version 1.5.20 by running CDXDBI.exe from \02\_Install Folder.

#### c. Post-Install Steps

The following steps are included in the post-install process:

##### Sequence synchronization

In release 1.4.5, two new sequences CI\_MRSTGUPID\_SEQ, CI\_NTUPID\_SEQ were added to ID the primary key columns of CI\_MR\_STAGE\_UP and CI\_NT\_UP tables. Because these tables existed in previous versions of CC&B, we must adjust the "last number" value of the new sequences to either an existing sequence that you have already been using for the same purpose or the maximum value of the primary key column of the table(s). If you have already set these sequences in Release 1.4.5 or later, skip this step and continue from the next step (if any).

Following are the steps involved in the adjust sequences process:

1. Execute the AdjustSequences.bat utility file under \03\_Post-Install folder, by double-clicking it or running it from command line. The utility prompts you to enter values for following parameters:

```
Enter the username that owns the CC&B schema (e.g. CISADM) :
Enter the password for the CC&B schema owner:
Enter the name of the Oracle Database:
```

2. The utility connects to the database and prompts you to continue the processing.
3. The utility checks for the two new sequences in the database and for each sequence, prompts you to enter the name of an existing sequence that you have already been using to ID the primary key column of its corresponding table. You can press Enter if you are not using any existing sequence (the utility sets its value to the maximum value of the primary key in that case).

If you choose to adjust a new sequence to an existing sequence, the utility sets the new sequence to the current “last number” value of the existing sequence, drops the existing sequence, and creates a synonym for the dropped sequence. This way the existing sequence is replaced with a CCB sequence without breaking any existing code that may be referring to the existing sequence.

4. After sequences are adjusted, the utility reconfigures the security in the database and prompts you to enter the values for following parameters:

```
Enter the Oracle user that owns the schema (e.g. CISADM) :
Enter the password for the CC&B schema:
Enter a comma-separated list of Oracle users in which
synonyms need to be created (e.g. cisuser,cisread):
Enter the name of the Oracle Database:
```

This completes the adjust sequences process. The process generates a log file (AdjustSequences.log). You can review the log for the actions performed and any errors that may have occurred during the process.

2. Apply Customer Care and Billing 1.5.20 Service Pack 1 by running CDXPATCH.exe from \Step\_2\_Apply\_ServicePack\_v15201 folder.
3. Upgrade to Customer Care and Billing 2.0.5 by executing the following steps from \Step\_3\_Upgrade\_to\_v205\Upgrade-Install folder.
  - a. **Pre-Install:** Run CDXDBI.exe from \01\_Pre-Install Folder. During this process, Owner Flag information will be upgraded from CI to C1 or F1 on system data.
  - b. **Install:** Run CDXDBI.exe from \02\_Install Folder. This process will complete upgrade of rest of the system data to CC&B V2.0.5.
4. Upgrade to Customer Care and Billing 2.1.0 by running CDXDBI.exe from \Step\_4\_Upgrade\_to\_v210\Upgrade-Install folder.
5. Apply the Framework 2.1.0 and Customer Care and Billing 2.1.0 current rollups from the \Step\_5\_Apply\_210\_Current\_Rollup folder:
  - a. Apply the Framework version 2.1.0 current rollup by running CDXPATCH.exe from the \01\_FW210SP7\_plus\_Rollup folder.

- b. Apply the Customer Care and Billing version 2.1.0 current rollup by running CDXPATCH.exe from the \02\_CCB210SP7\_plus\_Rollup folder.
6. Upgrade to Framework version 2.2.0 and Customer Care and Billing version 2.2.0 by running CDXDBI.exe from the \Step\_6\_Upgrade\_to\_v220\Upgrade-Install folder.
7. Apply Framework version 2.2.0 and Customer Care and Billing 2.2.0 Service Packs from the \Step\_7\_Apply\_v220\_SP10 folder:
  - a. Apply Framework version 2.2.0 Service Pack 1 by running CDXDBI.exe from the \01\_FW22\_SP1 folder.
  - b. Apply Framework version 2.2.0 Service Pack 18 by running CDXPATCH.exe from the \02\_FW\_220\_SP18 folder.

**Note:** Use the -q parameter to prevent CDXPATCH tool from prompting to apply the patch for every patch included in the service pack.

- c. Apply Framework version 220 Service Pack 18 Rollup by running the CDXPATCH.exe from the \03\_FW\_220\_SP18\_Rollup folder.
 

**Note:** Use the -q parameter to prevent CDXPATCH tool from prompting to apply the patch for every patch included in the service pack.
- d. Apply Customer Care and Billing 2.2.0 Service Pack 10 by running the CDXPATCH.exe from the \04\_CCB\_220\_SP10 folder.
8. Apply Framework version 4.2.0 Service Pack 2 and Customer Care and Billing 2.4.0 Service Packs 2 from the \Step\_8\_Upgrade\_to\_v2402 folder:
  - a. Apply Framework version 4.2.0 Service Pack 2 by running OraDBI.exe from the \01\_FW420\_SP2 folder.
  - b. Apply Framework version 4.2.0 Service Pack 2 rollup by running CDXPATCH.exe from the \02\_FW420\_SP2\_Rollup folder.
  - c. Optional: Execute CCB2401\_BpSchema2.SQL
 

This step is recommended to improve the performance of the upgrade process. Refer to the [Upgrading from V2.3.1.10 to V2.8.0.0.0](#) section on how to execute this step.
  - d. Optional: Execute CCB2401\_BpSchema3.SQL
 

This step is recommended to improve the performance of the upgrade process. Refer to the [Upgrading from V2.3.1.10 to V2.8.0.0.0](#) section on how to run this step.
  - e. Installing the upgrade script to trim the SRCH\_CHAR\_VAL column on the char tables.
 

Run the CCB2402\_Trim\_SRCH\_CHAR\_VAL.sql.

Refer to the [Upgrading from V2.4.0.0 or V2.4.0.1 to V2.8.0.0.0](#) section on how to run this step.
  - f. Apply Customer Care and Billing 2.4.0 Service Pack 2 by running the OraDBI.exe from the \04\_CCB240\_SP2 folder.
  - g. Run CCB2401\_APDATA1.sql.

Before executing this script, please verify the script and make a note that these Refer to the [Upgrading from V2.3.1.10 to V2.8.0.0.0](#) section on how to run this step.

- h. Installing the upgrade script to trim the SRCH\_CHAR\_VAL column on the char tables.

Execute the FW4202\_Trim\_SRCH\_CHAR\_VAL.sql.

Refer to the [Upgrading from V2.4.0.0 or V2.4.0.1 to V2.8.0.0.0](#) section on how to run this step.

- i. Enable USER\_LOCK Package.

Refer to the [Upgrading from V2.3.1.10 to V2.8.0.0.0](#) section on how to run this step.

9. Upgrade to Oracle Utilities Customer Care and Billing 2.8.0.0.0 by following the steps in the [Upgrading from V2.4.0.2 or V2.4.0.3 to V2.8.0.0.0](#) section.

## Demo Install

This section describes how to install the demo database components for Oracle Utilities Customer Care and Billing, including:

- [Copying and Decompressing Install Media](#)
- [Creating the Database](#)
- [Importing the Demo Dump File](#)
- [Configuring Security](#)

### Copying and Decompressing Install Media

To copy and decompress the Oracle Utilities Customer Care and Billing database:

1. Download Oracle Utilities Application Framework V4.4.0.3.0 Oracle Database, Oracle Utilities Application Framework V4.4.0.3.0 Single Fix Prerequisite Database Rollup for CCB V2.8.0.0.0 (if there's any), Oracle Utilities Customer Care and Billing V2.8.0.0.0 Oracle Database and Oracle Utilities Customer Care and Billing V2.8.0.0.0 Single Fix Database Rollup MultiPlatform (if there is any) from the Oracle Software Delivery Cloud.
2. Copy FW-V4.4.0.3.0-Oracle-Database-Multiplatform, CCB-V2.8.0.0.0-FW-Database-PREREQ-MultiPlatform (if there's any), CCB-V2.8.0.0.0-Oracle-Database-Multiplatform and CCB-V2.8.0.0.0-Database-Rollup-MultiPlatform (if there is any) directories to your local machine.

These files contain all the database components required to install the Oracle Utilities Application Framework and Customer Care and Billing database.

### Creating the Database

**Note:** You must have Oracle Database Server 19c installed on your machine to create the database.

It is strongly recommended to use DBCA to create the database.



## Creating the Database on UNIX

Create the database using the Database Configuration Assistant (DBCA).

Refer to the article *Master Note: Overview of Database Configuration Assistant (DBCA) (Doc ID 1488770.1)* on My Oracle Support for more information. Make sure to set for database as follows:

- Character set for database as AL32UTF8
- National Character Set (NLS\_NCHAR\_CHARACTERSET - AL16UTF16)

Refer to the [Creating the Database](#) section for steps to create the database.

## Creating the Database on Windows

You should be logged in as a user who is a member of the local ORA\_DBA group on that server. The ORA\_DBA group should have “administrator” privileges assigned to it.

Refer to the article *Master Note: Overview of Database Configuration Assistant (DBCA) (Doc ID 1488770.1)* on My Oracle Support for more information. Make sure to set for database as follows:

- Character set for database as AL32UTF8
- National Character Set (NLS\_NCHAR\_CHARACTERSET - AL16UTF16)

Refer to the [Creating the Database](#) section for steps to create the database.

## Database Storage BYTES/CHARACTER

Database created by default will store data in BYTES. To store data in CHARACTER follow the procedure below:

### Initial Install

1. Run the following statement to set nls\_length\_semantics=CHAR.

```
SQL> ALTER SYSTEM SET nls_length_semantics=CHAR SCOPE=BOTH;
```

2. Restart the database.
3. Make sure nls\_length\_semantics is CHAR. Perform the following command:

```
SQL> SHOW PARAMETER nls_length_semantics
```

**Note:** For pluggable database ensure to set nls\_length\_semantics=CHAR for both container and pluggable database.

### Upgrade and Migration from BYTE Based Storage to CHARACTER Based Storage

1. Create a database using DBCA.
2. Run the following statement to set nls\_length\_semantics=CHAR.

```
SQL> ALTER SYSTEM SET nls_length_semantics=CHAR SCOPE=BOTH;
```

3. Restart the database.
4. Make sure nls\_length\_semantics is CHAR using the following command:

```
SQL> SHOW PARAMETER nls_length_semantics
```

**Note:** For pluggable database ensure to set `nls_length_semantics=CHAR` for container and pluggable database both.

- Export schema from the database that has `nls_length_semantics=BYTE`.

```
expdp userid=system/<code>@<SID> directory=<DIR_NAME>
schemas=<schema_name> dumpfile=<schema_name>.dmp
logfile=<schema_name>.log
```

- Generate DDL from dump file using Oracle impdp utility.

```
impdp userid=system/<code>@<SID> directory=<DIR_NAME>
DUMPFIL= <schema_name>.dmp SCHEMAS=<schema_name>
SQLFILE=<schema_name>_DDL.sql
```

- Replace “Byte” with “Char” in `<schema_name>DDL.sql`.

For vi editor (in Linux), use the following command to replace Byte to Char.

```
:%s/BYTE/CHAR/g
```

- Replace the schema name also if it is required for environment.
- Run `<schema_name>DDL.sql` (generated in step 6) that creates objects in the schema.

Run the following command to ensure the number of objects at source and target are equal.

```
SQL>select OWNER || ' ' || OBJECT_TYPE || ' ' || COUNT(*) || ' '
|| STATUS FROM DBA_OBJECTS WHERE OWNER in ('<SCHEMA_NAME>') GROUP
BY OWNER, OBJECT_TYPE , STATUS ORDER BY OBJECT_TYPE;
```

- If an object is missing for any reason, create it by fixing DDL manually (DDL for each object is available in the file which was created in step 6).

Run DDL for the objects that are not created.

- Generate DDL to disable triggers using following command:

```
SQL> SELECT 'ALTER TABLE' || ' ' ||TABLE_NAME || ' ' || 'DISABLE ALL
TRIGGERS;' FROM USER_TABLES;
```

- Run the script generated from step 11 to disable all triggers.
- Import the data only.

Use the following command to import data only into the schema created to support CHAR based database storage.

```
impdp userid=system/<code>@<SID> dumpfile=<schema_name>.dmp
CONTENT=DATA_ONLY SCHEMAS=<schema_name>
LOGFILE=<schema_name>_import.log
```

- Enable the triggers.

Use the following command to generate DDL for triggers.

```
SQL>SELECT 'ALTER TABLE' || ' ' ||TABLE_NAME || ' ' || 'ENABLE ALL
TRIGGERS;' FROM USER_TABLES;
```

- Run the script generated from step No.14 to enable all triggers.

## Importing the Demo Dump File

After a successful database creation, import the demo data.

1. Set the correct ORACLE\_SID and ORACLE\_HOME.
2. Run following command to import demo dump:

**NOTE:** Make sure the ..\CCB-V2.8.0.0.0-Oracle-Database-Multiplatform\CCB/Demo/exp\_demo.dmp.gz file is extracted and available in data\_pump\_dir's location before running the below import command.

```
impdp directory= data_pump_dir dumpfile= exp_demo.dmp
logfile=exp_demo.log schemas=CISADM
```

## Configuring Security

The configuration security utility and scripts are already part of the delivered jarfiles in ..\FW-V4.4.0.3.0-Oracle-Database-Multiplatform\FW\jarfiles directory. It can be executed from a Linux or a Windows machine.

Please note the following:

- Database vault must be disabled before running.
- Interactive mode for this utility is currently not working.
- -f parameter is not working and will be deprecated soon.

The utility configures security for the application owner schema objects.

OraGenSec, by default, grants permissions to CIS\_USER and CIS\_READ roles. To use site-specific roles, execute OraGenSec after providing the command line options and specifying the specific roles.

### OraGenSec Java Usage

```
java OraGenSec [-a <arg>] [-d <arg>] [-f <arg>] [-h] [-l <arg>] [-o
<arg>] [-q] [-r <arg>] [-u <arg>]
```

### OraGenSec Help

```
-a <arg>      Generate security for All objects in the database
-d <arg>      DB connection string as:
              $DB_USER,$DB_PWD,$DB_CONNECTION_STRING,$TARGET
              _SCHEMA
-f <arg>      Generate security for specific objects from an input File
-h           Print Help
-l <arg>      Name of log file (optional)
-o <arg>      Generate security for comma separated list of objects
-p <arg>      Corresponding passwords of users to create synonyms for
-q          Quiet mode
-r <arg>      Roles corresponding to the users
-u <arg>      Read Write user, Read Only user
```

To run the utility:

1. Set JAVA\_HOME, PATH, and CLASSPATH.

**UNIX:**

```
export JAVA_HOME=/scratch/software/jdk1.8.0_102/
export PATH=$JAVA_HOME/bin:$PATH
export CLASSPATH=../FW-V4.4.0.3.0-Oracle-
Database-Multiplatform/FW/jarfiles/*
```

**WINDOWS:**

```
SET JAVA_HOME=C:\Program Files\Java\jdk1.8.0_101
SET PATH=%JAVA_HOME%\bin;%PATH%
SET CLASSPATH= C:\ FW-V4.4.0.3.0-Oracle-Database-
Multiplatform\FW\jarfiles\*
```

2. From any directory, run Oragensec. Make sure that Step 1 is complete. Run the following command:

**UNIX:**

```
java -Xmx1500M com.oracle.ouaf.oem.install.OraGenSec-d
<DBUSER>,<DBPASS>, jdbc:oracle:thin:@<DB_SERVER>:<PORT>/
<SID> -u <RW_USER>,<R_USER> -r <RW_USER_ROLE>,<R_USER_ROLE> -a A -p
<RW_USERPASS>,<R_USERPASS>
```

**WINDOWS:**

```
"%JAVA_HOME%"\bin\java -Xmx1500M
com.oracle.ouaf.oem.install.OraGenSec -d <DBUSER>,<DBPASS>,
jdbc:oracle:thin:@<DB_SERVER>:<PORT>/
<SID> -u <RW_USER>,<R_USER> -r <RW_USER_ROLE>,<R_USER_ROLE> -a A -p
<RW_USERPASS>,<R_USERPASS>
```

# Chapter 3

---

## Database Design

The standard for database objects such as tables, columns, and indexes, for products using the Oracle Utilities Application Framework helps in smooth integration and upgrade processes by ensuring clean database design, promoting communications, and reducing errors.

Just as Oracle Utilities Application Framework goes through innovation in every release of the software, it is also inevitable that the product will take advantage of various database vendors' new features in each release. The recommendations in the database installation section include only the ones that have been proved by vigorous QA processes, field tests and benchmarks.

This chapter describes the following:

- [Database Object Standard](#)
- [Column Data Type and Constraints](#)
- [Standard Columns](#)

---

# Database Object Standard

This section discusses the rules applied to naming database objects and the attributes that are associated with these objects.

## Categories of Data

A table can belong to one of the three categories:

- Control (admin)
- Master
- Transaction

For purposes of physical table space design, metadata and control tables can belong to the same category.

Example of tables in each category:

- **Control:** SC\_USER, CI\_ADJ\_TYPE, F1\_BUS\_OBJ
- **Master:** CI\_PER, CI\_PREM
- **Transaction:** F1\_FACT, CI\_FT

All tables have the category information in their index name. The second letter of the index carries this information. Refer to [Indexes](#) for more information.

## Naming Standards

The following naming standards must be applied to database objects.

### Table

Table names are prefixed with the owner flag value of the product. For customer modification **CM** must prefix the table name. The length of the table names must be less than or equal to 30 characters. A language table should be named by suffixing **\_L** to the main table. The key table name should be named by suffixing **\_K** to the main table.

It is recommended to start a table name with the 2-3 letter acronym of the subsystem name that the table belongs to. For example, **MD** stands for metadata subsystem and all metadata table names start with **CI\_MD**.

Some examples are:

- CI\_ADJ\_TYPE
- CI\_ADJ\_TYPE\_L

A language table stores language sensitive columns such as a description of a code. The primary key of a language table consists of the primary key of the code table plus language code (LANGAGUE\_CD).

A key table accompanies a table with a surrogate key column. A key value is stored with the environment id that the key value resides in the key table.

The tables prior to V2.0.0 are prefixed with CI\_ or SC\_.

## Columns

The length of a column name must be less than or equal to 30 characters. For customer modification, CM must prefix the column name. The following conventions apply when you define special types of columns in the database.

- Use the suffix **FLG** to define a lookup table field. Flag columns must be CHAR(4). Choose lookup field names carefully as these column names are defined in the lookup table (CI\_LOOKUP\_FLD) and must be prefixed by the product owner flag value.
- Use the suffix **CD** to define user-defined codes. User-defined codes are primarily found as the key column of the admin tables.
- Use the suffix **ID** to define system assigned key columns.
- Use the suffix **SW** to define Boolean columns. The valid values of the switches are 'Y' or 'N'. The switch columns must be CHAR(1)
- Use the suffix **DT** to define Date columns.
- Use the suffix **DTTM** to define Date Time columns.
- Use the suffix **TM** to define Time columns.

Some examples are:

- ADJ\_STATUS\_FLG
- CAN\_RSN\_CD

## Indexes

Index names are composed of the following parts:

[OF][*application specific prefix*][C/M/T]NNN[P/S]n

- **OF**- Owner Flag. The standard is to use the two characters of the product's owner flag. Note that there may be some older indexes that use only the first character of the owner flag. For client specific implementation of index, use CM for Owner Flag. If implementation creates a CM Index on table-columns for which the base product already provides an index, then the CM Index will be overridden by the based index.
- Application specific prefix could be C, F, T or another letter.
- **C/M/T** - The second character can be either C or M or T. C is used for control tables (Admin tables). M is for the master tables. T is reserved for the transaction tables.
- **NNN** - A three-digit number that uniquely identifies the table on which the index is defined.
- **P/S** - P indicates that this index is the primary key index. S is used for indexes other than primary keys.
- **n** is the index number, unique across all indexes on a given table (0 for primary and 1, 2, etc., for the secondary indexes).

Some examples are:

- F1C066P0
- F1C066S1

- XT206C2
- CMT206S2

Warning! Do not use index names in the application as the names can change due to unforeseeable reasons.

### Updating Storage.xml

The storage.xml file that comes with the product allocates all base tables and indexes to the default tablespace CISTS\_01. If you decide to allocate some tables or indexes outside of the default tablespace, then this has to be reflected in the storage.xml file by changing the tablespace name from the default value to a custom value, according to the format shown below:

Format:

```
<Table_Name>
  <TABLESPACE>CISTS_01</TABLESPACE>
  <PARALLEL>1</PARALLEL>
- <LOB>
- <Column Name>
  <TABLESPACE>CISTS_01</TABLESPACE>
  <SECUREFILE>Y</SECUREFILE>
  <CHUNK>8192</CHUNK>
  <CACHE>N</CACHE>
  <LOGGING>Y</LOGGING>
  <INROW>Y</INROW>
  <COMPRESS>N</COMPRESS>
  </Column Name>
</LOB>
</Table_Name>
```

Where Parallel defines the number of threads, that Oracle DB Server will use to access a table or create an index.

We recommend creating CLOBs stored as SECUREFILE with Medium compression and Cache enabled. Please note that by default, medium compression is turned-off and must only be enabled if you have the Advanced compression license.

For instance, if a DBA decided to allocate table CI\_ACCT in a tablespace MyTablespace, then they would have to change the storage.xml as follows:

```
<CI_ACCT>
  <TABLESPACE>MyTablespace</TABLESPACE>
</CI_ACCT>
```

The oradbi process uses the storage.xml file to place the new database objects into defined tablespaces. A tablespace referenced in the storage.xml file must exist in the database.

The storage.xml file has to be adjusted before each upgrade and/or new installation as required to allocate the tables and indexes across those tablespaces.

Table name is included as a comment for each of the indexes for clarity.

For initial installs, information for each object should be reviewed by a DBA. For upgrades, only tablespace information for the objects added in the new release needs to be reviewed by a DBA.



Be careful while editing this file. Make sure that the tablespace names being used exist in the database. Do not change the basic format of this file.

## Sequence

The base sequence name must be prefixed with the owner flag value of the product. For customer modification **CM** must prefix the sequence name. The sequence numbers should be named as below:

1. If the Sequence is used for a specific table, then use the following sequence name:

[OF][C/M/T]NNN\_SEQ

- OF stands for Owner Flag. For example, for Framework its F1 and for CCB it is C1.
- C/M/T stands for Control (Admin)/Master/Transaction Tables.
- NNN is a three digit unique Identifier for a table on which the sequence is defined.

For e.g: F1T220\_SEQ

2. If more than one sequence is used for a specific table, then use the following Sequence Name:

[OF][C/M/T]NNN\_Column\_Name\_SEQ

- C/M/T stands for Control (Admin)/Master/Transaction tables.
- NNN is a three digit unique identifier for a table on which the sequence is defined.

For Example: F1T220\_BO\_STATUS\_CD\_SEQ and F1T220\_BUS\_OBJ\_CD\_SEQ

3. If sequence is used for a generic requirement and not specific to a table, then use the following sequence name.

[OF]Column\_Name\_SEQ

For Example: F1FKVALID\_SEQ

- For a customer modification, CM must prefix the sequence name.

## Trigger

The base trigger name must be prefixed with the owner flag value of the product.

When implementers add database objects, such as tables, triggers and sequences, the name of the objects should be prefixed by CM.

---

# Column Data Type and Constraints

This section discusses the rules applied to column data type and constraints, and the attributes that are associated with these objects.

## User Defined Code

User Defined Codes are defined as CHAR type. The length can vary by the business requirements but a minimum of eight characters is recommended. You will find columns defined in less than eight characters but with internationalization in mind, new columns should be defined as CHAR(10) or CHAR(12). Also note that when the code is referenced in the application the descriptions are shown to users in most cases.

## System Assigned Identifier

System assigned random numbers are defined as CHAR type. The length of the column varies to meet the business requirements. Number type key columns are used when a sequential key assignment is allowed or number type is required to interface with external software. For example, Notification Upload Staging ID is a Number type because most EDI software uses a sequential key assignment mechanism. For sequential key assignment implementation, the DBMS sequence generator is used in conjunction with Number Type ID columns.

## Date/Time/Timestamp

Date, Time and Timestamp columns are defined physically as DATE in Oracle. Non-null constraints are implemented only for the required columns.

## Number

Numeric columns are implemented as NUMBER type in Oracle. The precision of the number should always be defined. The scale of the number might be defined. Non-null constraints are implemented for all number columns.

## Fixed Length/Variable Length Character Columns

When a character column is a part of the primary key of a table define the column in CHAR type. For the non-key character columns, the length should be the defining factor. If the column length should be greater than 10, use VARCHAR2 type in Oracle.

## Null Column Support

The product supports Nullable columns. This means that the application can write NULLs instead of a blank space or zero (for numeric columns) by using NULLABLE\_SW on CI\_MD\_TBL\_FLD. If REQUIRED\_SW is set to 'N' and the NULLABLE\_SW is set to 'Y', the application will write a NULL in that column. The artifact generator will create hibernate mapping files with appropriate parameters so that the framework hibernate mapping types will know if a given property supports a null value.

NULLABLE\_SW is not new, but has previously been used for certain fields such as dates, and some string and number foreign-key columns. Because of this, there is the possibility that there is incorrect metadata for some columns, and that turning on this new feature could result in incorrect behavior when using that metadata. The upgrade script fixes the metadata to make sure that the existing tables will not be affected.

This new feature only supports tables maintained by Java but NOT a Java program converted from COBOL. Thus, enhancing any existing tables to use null columns must be done only after making sure that the tables are maintained by Java, and not Java converted COBOL programs.

## XML Type Support

The product supports XML Type. XML Type provides following advantages

1. The ability to use XQuery for querying nodes in the XML document stored within a column defined as XMLType.
2. The option to use the XML engine, which is built into the Oracle Database, to create indexes using nodes within the XML document stored in the XMLType column.

## Cache and Key Validation Flags

By default, the Cache Flag is set to NONE. For most of the admin tables the CACHE Flag should be 'Cached for Batch'. This specifies that the table is cached as L2 cache to reduce database trips.

By default the Key Validation Flag is set to ALL. For tables which have the user defined keys, the KEY\_VALIDATION\_FLG should be set as 'ALL'. This checks the existence of the key before inserting a new one.

## Table Classification and Table Volume Flags

There are multiple types of tables in the application, namely Admin system tables, Admin non-system tables, master tables and transaction tables. The Table Classification flag (TBL\_CLASSIFICATION\_FLG) sets the appropriate value for this lookup field to give a better view of the table classification.

Table Volume flag (TBL\_VOLUME\_FLG) is a customer modifiable field which is initially populated by product, but can be overridden by implementation. The field gives an idea of the relative data volume (categorized as highVolume, lowVolume and mediumVolume) of the table to make informed decisions.

## Default Value Setting

The rules for setting the database default values are as follows:

- When a predefined default value is not available, set the default value of Non-null CHAR or VARCHAR columns to blank except the primary key columns.
- When a predefined default value is not available, set the default value Non-null Number columns to 0 (zero) except the primary key columns.

- No database default values should be assigned to the Non Null Date, Time, and Timestamp columns.

## Foreign Key Constraints

In general, referential integrity is enforced by the application and the Foreign Key constraints are not defined in the database. Indexes are created on most of Foreign Key columns to make sure desired performance characteristics. However in the specific case of ILM implementation, some of the tables require Foreign Key constraints due to the referential partitioning.

## Standard Columns

This section discusses the rules applied to standard columns and the attributes that are associated with these objects.

### Owner Flag

Owner Flag (OWNER\_FLG) columns exist on the system tables that are shared by multiple products. Oracle Utilities Application Framework limits the data modification of the tables that have owner flag to the data owned by the product.

### Version

The Version column is used to for optimistic concurrency control in the application code. Add the Version column to all tables that are maintained by a Row Maintenance program.

# Chapter 4

---

## Database Implementation Guidelines

This section outlines the general guidelines for database components, namely:

- [Configuration Guidelines](#)
- [Oracle Database Implementation Guidelines](#)

# Configuration Guidelines

This section describes the general recommendations for configuring various database objects and includes a brief syntax overview. It covers the general aspects of the database objects and does not cover any specific implementation requirements.

- [Index](#)
- [Table Partitioning Recommendations](#)
- [Transparent Data Encryption Recommendations](#)
- [Data Compression Recommendations](#)
- [Database Vault Recommendations](#)
- [Oracle Fuzzy Search Support](#)
- [Information Lifecycle Management \(ILM\) and Data Archiving Support](#)
- [Storage Recommendations](#)
- [Database Configuration Recommendations](#)
- [Database Syntax](#)
- [Database Initialization Parameters](#)

## Index

Index recommendations specify points that need to be considered when creating indexes on a table.

1. Indexes on a table should be created according to the functional requirements of the table and not in order to perform SQL tuning.
2. The foreign keys on a table should be indexes.

**Note:** If the implementation creates a CM index on table-columns where the product already provides an index, then the CM index will be overridden by the base index.

## Table Partitioning Recommendations

Oracle Utilities recommends using a minimum of 'n' partitions for selective database objects, where 'n' is number of RAC nodes.

## Transparent Data Encryption Recommendations

Oracle Utilities supports Oracle Transparent Data Encryption (TDE). Oracle 11gR1 supports tablespace level encryption. The application supports tablespace level encryption for all application data. Make sure that the hardware resources are sufficiently sized for this as TDE uses additional hardware resources. The Oracle Advanced Security license is a prerequisite for using TDE.

Please consider the following when implementing TDE:

- Create a wallet folder to store the master key. By default, the wallet folder should be created under \$ORACLE\_BASE/admin/<sid>.

- The wallet containing the master key can be created using the following command:

```
alter system set encryption key authenticated by "keypasswd"
```

- The wallet can be closed or opened using the following commands:

```
alter system set wallet open identified by "keypasswd";
alter system set wallet close;
```

- Column level encryption can be achieved using the following commands:

```
create table <table_name>
(name varchar2(200) default ' ' not null,
bo_data_area CLOB encrypt using 'AES128',
bo_status_cd char(12) encrypt using 'AES128')
lob (bo_data_area) store as securefile (cache compress)
tablespace <tablespace_name>;
```

- AES128 is the default encryption algorithm.
- Tablespace level encryption is also supported using the following command:

```
Create tablespace <tablespace_name> logging datafile '<datafile
location>' size <initial size> reuse autoextend on next <next
size>
maxsize unlimited extent management local uniform size
<uniform size> encryption using 'AES128' default
storage(encrypt);
```

- Indexed columns can only be encrypted using the NO SALT Option. Salt is a way to strengthen the security of encrypted data. It is a random string added to the data before it is encrypted, causing repetition of text in the clear to appear different when encrypted.

## Data Compression Recommendations

Oracle Utilities supports Advanced Data Compression, available with Oracle 11gR1 onwards, to reduce the database storage footprint. Make sure that your resources are sufficiently sized for this as it uses additional system resources. Compression can be enabled at the Tablespace level or at the Table level.

### Exadata Hardware

For Exadata hardware the compression recommendations are:

- For high volume tables, keep the current table partition uncompressed. All of the older partitions will be compressed based on QUERY HIGH compression.
- For high volume tables with CLOBs, always keep the CLOBs in securefiles with MEDIUM compression. Also keep the current table partition uncompressed. All of the older partitions will be compressed based on QUERY HIGH compression.
- Load data into the uncompressed table partitions using a conventional load and then, once data is loaded using a CTAS operation, load into a temporary heap table. Then truncate the original partition. Alter the original partition into HCC compressed and then partition exchange this with the temporary heap table.

- All multi column Indexes (primary as well as secondary) will be compressed using the default compression. HCC or OLTP compression is not applicable on the top of compressed Indexes.

### Non- Exadata Hardware

For non-Exadata hardware the recommendations are the same as above, except that you cannot use HCC compression (it is only available in Exadata database machine). Instead of HCC you can use any other compression tool available to you for non-Exadata hardware.

### CLOB Fields

All CLOB fields should be stored as SecureFiles and Medium compressed. This requires a separate license for Advanced Data Compression. As a part of the schema, we create the product-owned tables with compression turned OFF at the LOB level. If you have the license for Advanced Data Compression, you can enable compression by updating the storage.xml.

### Compression Guidelines

- Admin and Metadata tables and their indexes will NOT be compressed.
- All Transactional Tables will be compressed. This includes ILM enabled MOs where applicable.
- Compression will be done at the tablespace level.
  - Different MOs will have different tablespaces.
  - Partitioned MOs will have one tablespace per partition.
  - Child tables will use reference partitioning with parent + children sharing the same tablespace. (parent and child will always be managed/archived together).
- All multicolumn indexes on transactional/ILM tables will be compressed.
  - Use 'compress advanced low'.
  - Local partitioned indexes will reside in the same tablespace as the table.
  - Each MO will have an index tablespace. All MO (Parent-Child Table) indexes will share this tablespace.
  - Do NOT specify standard index compression.
- Securefile medium compression in row for LOBs and CLOBs.

#### Examples:

##### Create a Tablespace with Advanced Rowstore Compress

```
CREATE BIGFILE TABLESPACE CM_XT012_P2017JANDATAFILE '+DATA' SIZE
50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS
ADVANCED;
```

##### Create Table with Subpartitions using Compressed Tablespaces & Securefiles Compression

```
CREATE TABLE CI_ADJ (
```



```

ADJ_ID          CHAR(12) NOT NULL ENABLE,

SA_ID          CHAR(10) DEFAULT ' ' NOT NULL ENABLE, ADJ_TYPE_CD
CHAR(8) DEFAULT ' ' NOT NULL ENABLE, ADJ_STATUS_FLG CHAR(2) DEFAULT
' ' NOT NULL ENABLE, CRE_DT DATE,

CAN_RSN_CD     CHAR(4) DEFAULT ' ' NOT NULL ENABLE,

ADJ_AMT        NUMBER(15,2) DEFAULT 0 NOT NULL ENABLE, XFER_ADJ_ID
CHAR(12) DEFAULT ' ' NOT NULL ENABLE, CURRENCY_CD CHAR(3) DEFAULT
' ' NOT NULL ENABLE, COMMENTS VARCHAR2(254) DEFAULT ' ' NOT NULL
ENABLE, VERSION NUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
BEHALF_SA_ID CHAR(10) DEFAULT ' ' NOT NULL ENABLE, BASE_AMT
NUMBER(15,2) DEFAULT 0 NOT NULL ENABLE, GEN_REF_DT DATE,

APPR_REQ_ID CHAR(12) DEFAULT ' ' NOT NULL ENABLE,

ADJ_DATA_AREA CLOB, ILM_DT DATE,

ILM_ARCH_SW CHAR(1),)

ENABLE ROW MOVEMENT

PARTITION BY RANGE (ILM_DT)

SUBPARTITION BY RANGE (ADJ_ID) SUBPARTITION TEMPLATE (

SUBPARTITION S01 VALUES LESS THAN ( '124999999999' ), SUBPARTITION
S02 VALUES LESS THAN ( '249999999999' ), SUBPARTITION S03 VALUES
LESS THAN ( '374999999999' ), SUBPARTITION S04 VALUES LESS THAN (
'499999999999' ), SUBPARTITION S05 VALUES LESS THAN (
'624999999999' ), SUBPARTITION S06 VALUES LESS THAN (
'749999999999' ), SUBPARTITION S07 VALUES LESS THAN (
'874999999999' ), SUBPARTITION S08 VALUES LESS THAN ( MAXVALUE )

) (

PARTITION "P2017JAN" VALUES LESS THAN (TO_DATE('2017-02-01
00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))

tablespace CM_XT012_P2017JAN,

PARTITION "P2017FEB" VALUES LESS THAN (TO_DATE('2017-03-01
00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))

tablespace CM_XT012_P2017FEB,

PARTITION "P2017MAR" VALUES LESS THAN (TO_DATE('2017-04-01
00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))

tablespace CM_XT012_P2017MAR,

PARTITION "P2017APR" VALUES LESS THAN (TO_DATE('2017-05-01
00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))

tablespace CM_XT012_P2017APR,

PARTITION "P2017MAY" VALUES LESS THAN (TO_DATE('2017-06-01
00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))

```

```

tablespace CM_XT012_P2017MAY,

PARTITION "P2017JUN" VALUES LESS THAN (TO_DATE('2017-07-01
00:00:01',

'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))

tablespace CM_XT012_P2017JUN,

PARTITION "P2017JUL" VALUES LESS THAN (TO_DATE('2017-08-01
00:00:01',

'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))

tablespace CM_XT012_P2017JUL,

PARTITION "P2017AUG" VALUES LESS THAN (TO_DATE('2017-09-01
00:00:01',

'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))

tablespace CM_XT012_P2017AUG,

PARTITION "P2017SEP" VALUES LESS THAN (TO_DATE('2017-10-01
00:00:01',

'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))

tablespace CM_XT012_P2017SEP,

PARTITION "P2017OCT" VALUES LESS THAN (TO_DATE('2017-11-01
00:00:01',

'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))

tablespace CM_XT012_P2017OCT,

PARTITION "P2017NOV" VALUES LESS THAN (TO_DATE('2017-12-01
00:00:01',

'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))

tablespace CM_XT012_P2017NOV,

PARTITION "P2017DEC" VALUES LESS THAN (TO_DATE('2017-01-01
00:00:01',

'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))

tablespace CM_XT012_P2017DEC,

PARTITION "P2017DEC" VALUES LESS THAN (TO_DATE('2017-01-01
00:00:01',

'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))

tablespace CM_XT012_PMAX

);

```

### Create a Compressed Local Index

```

CREATE UNIQUE INDEX XT012S3 ON CI_ADJ ( ILM_DT, ILM_ARCH_SW, ADJ_ID
) TABLESPACE CM_XT012_IND COMPRESS ADVANCED LOW;

```

### Create a Compressed Global Partitioned Index

```

CREATE UNIQUE INDEX XT012S2 ON CI_ADJ ( XFER_ADJ_ID, ADJ_ID )
TABLESPACE CM_XT012_IND

GLOBAL PARTITION BY HASH (XFER_ADJ_ID, ADJ_ID ) (

```

```

PARTITION PART1 TABLESPACE CM_XT012_IND, PARTITION PART2 TABLESPACE
CM_XT012_IND, PARTITION PART3 TABLESPACE CM_XT012_IND, PARTITION
PART4 TABLESPACE CM_XT012_IND, PARTITION PART5 TABLESPACE
CM_XT012_IND, PARTITION PART6 TABLESPACE CM_XT012_IND, PARTITION
PART7 TABLESPACE CM_XT012_IND, PARTITION PART8 TABLESPACE
CM_XT012_IND
)

COMPRESS ADVANCED LOW;

Do NOT specify standard index compression.

CREATE INDEX XT012S1 ON CI_ADJ ( SA_ID, ADJ_TYPE_CD ) TABLESPACE
CM_XT012_IND LOCAL COMPRESS 1 COMPRESS ADVANCED LOW;

```

## Database Vault Recommendations

The product supports Database Vault. All non-application User IDs can be prevented from using DDL or DML statements against the application schema. So SYS and SYSTEM cannot issue DDL or DML statements against CISADM schema.

The application-specific administration account can issue DDL statements but should not be able to perform any DML or DCL statements.

Application user must be given DML only permissions.

Database Vault can be used to control access during patch process and Install/Upgrade process.

## Oracle Fuzzy Search Support

The product supports Oracle Fuzzy searches. To use this feature, Oracle Text must be installed. After Oracle Text is installed, an index must be created on the table where the fuzzy search needs to be performed from the application. This is only an Oracle database option and is not supported by other databases. Additionally, not all languages are supported. Refer to the Oracle database documentation for more information about fuzzy searching.

A typical syntax for implementation of fuzzy searching is as below. For the most updated syntax, please refer to Oracle Fuzzy documentation.

```

GRANT CTXAPP TO <Application schema owner e.g CISADM>;

GRANT EXECUTE ON CTX_DDL TO <Application schema owner e.g CISADM>;

create index <Application schema owner e.g CISADM>.<Index_Name> on
Application schema owner e.g CISADM>.<Table_Name> (<column_name>)
indextype is ctxsys.context parameters ('sync (on commit)');
begin
ctx_ddl.sync_index('Application schema owner e.g
CISADM>.<Index_Name>');
end
/

```

## Information Lifecycle Management (ILM) and Data Archiving Support

The product supports Data Archiving based on Information Lifecycle Management (ILM). If Information Lifecycle Management is part of your implementation, refer to the [Information Lifecycle Management and Data Archiving in CCB](#) chapter for instructions on partitioning objects when using ILM.

### Storage Recommendations

This section specifies recommended options for storing the database objects.

#### SecureFile for Storing LOBs

Beginning with Oracle 11g, tables having fields with data type of CLOB or BLOBS should have the LOB Columns stored as SecureFiles.

- The storage options with SecureFiles for Heap Tables should be ENABLE STORAGE IN ROW, CACHE and COMPRESS.
- For the IOT Table the PCTTHRESHOLD 50 OVERFLOW clause should be specified and the storage options with SecureFiles should be ENABLE STORAGE IN ROW, CACHE and COMPRESS.
- The PCTTHRESHOLD should be specified as a percentage of the block size. This value defines the maximum size of the portion of the row that is stored in the Index block when an overflow segment is used.
- The CHUNK option for storage, which is the data size used when accessing or modifying LOB values, can be set to higher than one database block size if big LOBs are used in the IO Operation.
- For SecureFiles, make sure that the initialization parameter db\_securefile is set to ALWAYS.
- The Tablespace where you are creating the SecureFiles should be enabled with Automatic Segment Space Management (ASSM). In Oracle Database 11g, the default mode of Tablespace creation is ASSM so it may already be set for the Tablespace. If it's not, then you have to create the SecureFiles on a new ASSM Tablespace.

**Note:** To enable compression on SecureFiles, you must have an Oracle Advanced Compression license in addition to Oracle Database Enterprise Edition. This feature is not available for the standard edition of the Oracle database.

If you are using Oracle Database Enterprise Edition, please verify that the “COMPRESS” flag is turned on by setting it to “Y” in Storage.xml.

Refer to the [Database Syntax](#) section for more information on SecureFiles.

### ILM Enabled Tablespace Requirements

- One tablespace for each partition of Parent table (Child table is referenced partitioned and would inherit the tablespace from Parent partition)
- One tablespace for each MO's global indexes (including child tables indexes) and \_K table

## Database Configuration Recommendations

This section specifies the recommended methods for configuring the database with a focus on specific functional area.

### Large Redo Log File Sizes

The Redo Log files are written by the Log Writer Background process. These log files are written in a serial manner. Once a log File is full, a log switch occurs and the next log file starts getting populated.

It is recommended that the size of the Redo log files should be sufficiently high so that you do not see frequent Log Switches in the alert logs of the database. Frequent Log Switches impact the IO performance and can be avoided by having a larger Redo log file size.

Frequent Log Switches impacts the IO performance and can be avoided by having a bigger Redo log File Size.

## Database Syntax

### SecureFile

```
CREATE TABLE <Table_Name>
  ( COLUMN1 ...,
    COLUMN2 (CLOB)
  )
LOB(COLUMN2) STORE AS SECUREFILE (CACHE COMPRESS);

CREATE TABLE <Table_Name>
  ( COLUMN1 ...,
    COLUMN2 (CLOB)
    CONSTRAINT <> PRIMARY KEY(...)
  )
ORGANIZATION INDEX PCTTHRESHOLD 50 OVERFLOW
LOB(COLUMN2) STORE AS SECUREFILE (ENABLE STORAGE IN ROW CHUNK CACHE
COMPRESS);
```

## Database Initialization Parameters

The recommended initialization parameters are given below. These parameters are a starting point for database tuning. An optimal value for a production environment may differ from one customer deployment to another.

```
db_block_size=8192
log_checkpoint_interval=0
db_file_multiblock_read_count=8
transactions=3000
open_cursors=3000
db_writer_processes=10
db_files=1024
```

```

dbwr_io_slaves=10 (Only if Asynchronous IO is not Supported)
sessions=4500
memory_target=0
memory_max_target=0
processes=3000
dml_locks=48600
_b_tree_bitmap_plans=FALSE

```

## Oracle Database Implementation Guidelines

This section provides specific guidelines for implementing the Oracle database.

### Oracle Partitioning

If you use a base index for the partitioning key, rename the index to CM\*\*.

If you use the primary key index of the table as the partitioning key:

- Make the index non-unique.
- Primary constraints should still exist.

The upgrade on the partitioned table works best if the partitioning key is not unique. This allows the upgrade tool to drop the PK constraints if the primary key columns are modified and recreate the PK constraints without dropping the index.

### Database Statistic

During an install process, new database objects may be added to the target database. Before starting to use the database, generate the complete statistics for these new objects by using the DBMS\_STATS package. You should gather statistics periodically for objects where the statistics become stale over time because of changing data volumes or changes in column values. New statistics should be gathered after a schema object's data or structure are modified in ways that make the previous statistics inaccurate. For example, after loading a significant number of rows into a table, collect new statistics on the number of rows. After updating data in a table, you do not need to collect new statistics on the number of rows, but you might need new statistics on the average row length.

A sample syntax that can be used is as following:

```

BEGIN
SYS.DBMS_STATS.GATHER_SCHEMA_STATS (
OwnName => 'CISADM'
,Degree => 16
,Cascade => TRUE
,Method_opt => 'FOR ALL COLUMNS SIZE AUTO'
, Granularity => 'ALL' );
END;
/

```

## Materialized View

Oracle Enterprise Edition supports query rewrite Materialized view. If you use Oracle Enterprise Edition, you can create following Materialized Views to improve performance of the Monitor batch jobs.

### Prerequisites

Make sure to set up the following:

1. Set parameter `QUERY_REWRITE_ENABLED=TRUE` at database level.
 

```
ALTER SYSTEM SET QUERY_REWRITE_ENABLED=TRUE; OR
ALTER SYSTEM SET QUERY_REWRITE_ENABLED=TRUE SCOPE=BOTH;
```
2. To create a materialized view in another user's schema you must have the **CREATE ANY MATERIALIZED VIEW** system privilege. The owner of the materialized view must have the `CREATE TABLE` system privilege. The owner must also have access to any master tables of the materialized view that the schema owner does not own (for example: if the master tables are on a remote database) and to any materialized view logs defined on those master tables, either through a **SELECT** object privilege on each of the tables or through the **SELECT ANY TABLE** system privilege.
3. To create a refresh-on-commit materialized view (**ON COMMIT REFRESH** clause), in addition to the preceding privileges, you must have the **ON COMMIT REFRESH** object privilege on any master tables that you do not own or you must have the **ON COMMIT REFRESH** system privilege.

To create the materialized view with query rewrite enabled, in addition to the preceding privileges: If the schema owner does not own the master tables, then the schema owner must have the **GLOBAL QUERY REWRITE** privilege or the **QUERY REWRITE** object privilege on each table outside the schema.

To debug materialized views, refer the below URLs:

- Oracle 11g - [https://docs.oracle.com/cd/B28359\\_01/server.111/b28313/qrbasic.htm](https://docs.oracle.com/cd/B28359_01/server.111/b28313/qrbasic.htm)
- Oracle 12c - <https://docs.oracle.com/database/121/DWHSG/qrbasic.htm#DWHSG01813>
- Troubleshoot Materialized View - [http://docs.oracle.com/database/121/ARPLS/d\\_mview.htm#ARPLS67193](http://docs.oracle.com/database/121/ARPLS/d_mview.htm#ARPLS67193)

```
CREATE MATERIALIZED VIEW F1_BO_LIFECYCLE_STATUS_MVW
(
  BUS_OBJ_CD,
  LIFE_CYCLE_BO_CD,
  BO_STATUS_CD,
  BATCH_CD
)
BUILD IMMEDIATE REFRESH ON COMMIT ENABLE QUERY REWRITE AS
SELECT
  BO2.BUS_OBJ_CD,BO.LIFE_CYCLE_BO_CD,BOSA.BO_STATUS_CD,LCBOS.BATCH_CD as
  LC_BATCH_CD
FROM
  F1_BUS_OBJ BO2,
```

```
F1_BUS_OBJ BO,  
F1_BUS_OBJ_STATUS LCBOS,  
F1_BUS_OBJ_STATUS_ALG BOSA  
WHERE  
BO2.LIFE_CYCLE_BO_CD =BO.LIFE_CYCLE_BO_CD AND  
BO.BUS_OBJ_CD = BOSA.BUS_OBJ_CD AND  
BOSA.BO_STATUS_SEVT_FLG = 'F1AT' AND  
LCBOS.BUS_OBJ_CD = BO.LIFE_CYCLE_BO_CD AND  
LCBOS.BO_STATUS_CD = BOSA.BO_STATUS_CD  
/  
  
create synonym SPLUSR.F1_BO_LIFECYCLE_STATUS_MVW for  
SPLADM.F1_BO_LIFECYCLE_STATUS_MVW;  
  
grant select on F1_BO_LIFECYCLE_STATUS_MVW to FW_DEV;  
grant select on F1_BO_LIFECYCLE_STATUS_MVW to SPL_USER;  
grant select on F1_BO_LIFECYCLE_STATUS_MVW to SPL_READ;
```

For more information, refer to the following documents:

- Basic Query Rewrite (Oracle 11g) - [https://docs.oracle.com/cd/B28359\\_01/server.111/b28313/qrbasic.htm](https://docs.oracle.com/cd/B28359_01/server.111/b28313/qrbasic.htm)
- Basic Query Rewrite for Materialized Views (Oracle 12c) - <https://docs.oracle.com/database/121/DWHSG/qrbasic.htm#DWHSG01813>
- Troubleshooting Materialized Views - [http://docs.oracle.com/database/121/ARPLS/d\\_mview.htm#ARPLS67193](http://docs.oracle.com/database/121/ARPLS/d_mview.htm#ARPLS67193)
- Debugging materialized Views - [http://docs.oracle.com/cd/B28359\\_01/server.111/b28313/qradv.htm](http://docs.oracle.com/cd/B28359_01/server.111/b28313/qradv.htm)

## Known Issues

The following are some of the known issues at the time of release. For more information, refer to these articles on My Oracle Support:

- Query Did Not Rewrite For A User Other Than The Owner Of the Materialized View (Doc ID 1594725.1) - A patch is available for bug report 14772096 for some platforms.
- Query rewrite not working as expected with SELECT DISTINCT (Doc ID 7661113.8) for Oracle version – 11.2.0.1 and 11.1.0.7 Fixed in version - 12.1.0.1 (Base Release), 11.2.0.2 (Server Patch Set)



# Chapter 5

---

## Conversion Tools

This chapter describes the following database conversion tools:


- [Database Configuration](#)
- [Installing the Script](#)
- [Preparing the Production Database](#)
- [Preparing the Staging Database](#)

Note that all database related single fixes and service packs need to be applied against the production schema. Staging schema should not be updated with database single fixes or service packs. Staging schema need to be rebuilt for any fixes that contain DDL to create new database objects in production schema.

## Database Configuration

The Conversion Tool Kit requires at least two sets of schema. One is to hold the staging data that the conversion tool gets the data from and performs validations. We call this schema the staging database. The target schema, which is referred to as the production database, is where the conversion tool inserts the validated data. Both the production database and the staging databases can reside in a single Oracle database or in different databases that are connected via a database link. Only the single database configuration is supported.

The following schematic diagram shows a sample configuration of both the production and staging environments in which the Conversion Tool Kit operates. The production and staging databases must be the same release level.

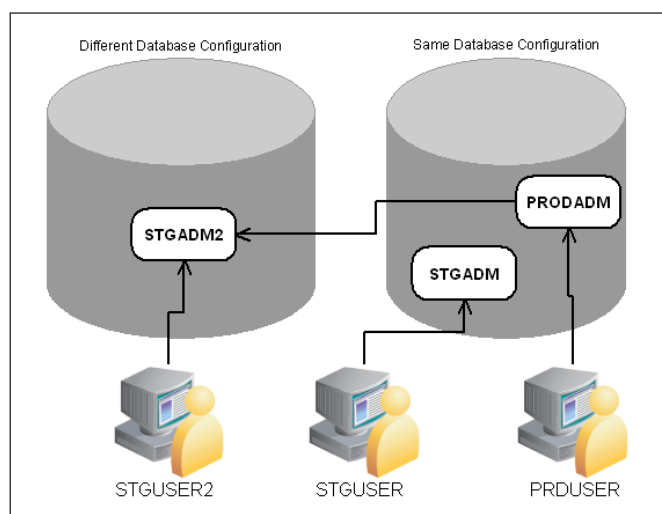

All the tables and views for the application are defined in the production database. The staging database has the same set of tables and views as the production database, except the tables that are grouped as part of the business configuration (control tables). Details on the differences of the tables of the two databases and of the conversion tool functionality are found in the Conversion Tool document.

## Installing the Script

The Conversion Setup Utility is provided to set up conversion schemas. Install Oracle 19c Client on the Windows desktop and configure SQLNet to connect to the target database. The Conversion folder includes the conversion setup utilities - ConvSetup.tar, scripts to create the users, and jarfiles.

### ConversionSetup Java Usage

-a, --apply	Apply Conversion setup on Staging Schema. '-s' is mandatory if '-a' is passed
-d, --dbConnString <arg>	DB connection string: Any "jdbc:oracle:thin" supported format [example: HOST:PORT/SID   HOST:PORT:SERVICE   <TNSSTRING>]
-o, --output <arg>	Output Directory for the generated files. Directory will be created if it doesn't already exist.

<code>-p,--prodSchema &lt;arg&gt;</code>	Primary/Production Schema and credentials to connect: CIS_ADMIN,CIS_PSWD. [example: CISADM,CISADM]
<code>-r,--rollback</code>	Revert Conversion setup on Staging Schema. '-s' is mandatory if '-r' is passed
<code>-s,--stgSchema &lt;arg&gt;</code>	Staging Schema and Staging users:STG_ADMIN,STG_PSWD,STG_RW_USER [example: STGADM,STGADM,STGUSER]

This section of the document describes how to create the databases for the conversion tool kit.

## Preparing the Production Database

If the production database does not exist create the database under the production schema owner (CISADM).

If the production database is upgraded from the previous version of the application make sure all public synonyms that are created on the application tables are deleted. Instead, each application user should have private synonyms created on the application tables in order for the conversion tool configuration to work.

## Preparing the Staging Database

After the staging owner (STGADM), application user (STGUSER) and read access user (STGREAD) are created, install the initial database option in the staging schema. The rest of the steps are listed below.

To run the utility:

1. Set JAVA\_HOME, PATH, and CLASSPATH.

### UNIX:

```
export JAVA_HOME=/scratch/software/jdk1.8.0_102/
export PATH=$JAVA_HOME/bin:$PATH
export CLASSPATH=../FW-V4.4.0.3.0-Oracle-Database-Multiplatform/
FW/jarfiles/*
```

### WINDOWS:

```
SET JAVA_HOME=C:\Program Files\Java\jdk1.8.0_101
SET PATH=%JAVA_HOME%\bin;%PATH%
SET CLASSPATH= C:\FW-V4.4.0.3.0-Oracle-Database-
Multiplatform\FW\jarfiles\*
```

2. Run Conversion from any directory making sure Step 1 is complete. Run the command as necessary.

### UNIX:

If '-a' (apply on staging flag) is passed, it connects to the database as staging schema admin and performs the conversion setup, in addition to creation of the above files, by running the same SQLs present in the create\* SQL files.

```
java com.oracle.ouaf.oem.conversion.ConversionSetup -d
${JDBC_CONN_STRING} -p ${CIS_ADMIN_USR},${CIS_ADMIN_PSWD} -a -s
${STG_ADMIN_USR},${STG_ADMIN_PSWD},${STG_RW_USER}
```

If '-r' (revert staging flag) is passed, it connects to the database as staging schema admin and reverts the staging to a state prior to conversion setup, running the same SQLs present in drop\_\* or restore\_\* SQL files.

```
java com.oracle.ouaf.oem.conversion.ConversionSetup -d
${JDBC_CONN_STRING} -p ${CIS_ADMIN_USR},${CIS_ADMIN_PSWD} -r -s
${STG_ADMIN_USR},${STG_ADMIN_PSWD},${STG_RW_USER}
```

To generate ONLY the scripts, the program should be invoked with '-s' parameter with no other flags (no '-a' or '-r'):

```
java com.oracle.ouaf.oem.conversion.ConversionSetup -d
${JDBC_CONN_STRING} -p ${CIS_ADMIN_USR},${CIS_ADMIN_PSWD} -s
${STG_ADMIN_USR},${STG_ADMIN_PSWD},${STG_RW_USER}
```

#### WINDOWS:

If '-a' (apply on staging flag) is passed, it connects to the database as staging schema admin and performs the conversion setup, in addition to creation of the above files, by running the same SQLs present in the create\* SQL files.

```
"%JAVA_HOME%"\bin\java
com.oracle.ouaf.oem.conversion.ConversionSetup -d
%{JDBC_CONN_STRING}% -p %{CIS_ADMIN_USR}%,%{CIS_ADMIN_PSWD}% -a -s
%{STG_ADMIN_USR}%,%{STG_ADMIN_PSWD}%,%{STG_RW_USER}%
```

If '-r' (revert staging flag) is passed, it connects to the database as staging schema admin and reverts the staging to a state prior to conversion setup, running the same SQLs present in drop\_\* or restore\_\* SQL files.

```
"%JAVA_HOME%"\bin\java
com.oracle.ouaf.oem.conversion.ConversionSetup -d
%{JDBC_CONN_STRING}% -p %{CIS_ADMIN_USR}%,%{CIS_ADMIN_PSWD}% -r -s
%{STG_ADMIN_USR}%,%{STG_ADMIN_PSWD}%,%{STG_RW_USER}%
```

To generate ONLY the scripts, the program should be invoked with '-s' parameter with no other flags (no '-a' or '-r'):

```
"%JAVA_HOME%"\bin\java
com.oracle.ouaf.oem.conversion.ConversionSetup -d
%{JDBC_CONN_STRING}% -p %{CIS_ADMIN_USR}%,%{CIS_ADMIN_PSWD}% -s
%{STG_ADMIN_USR}%,%{STG_ADMIN_PSWD}%,%{STG_RW_USER}%
```

It creates the following files in current directory (or output directory if passed as '-o') if '-r' (revert staging flag) is not passed.

mainFile.sql	Contains instructions on the order and how to run the files
create_schgrants.sql	Grant read permissions on production schema objects to staging admin user
create_cxviews.sql	Creates Conversion X views on staging schema
create_ctlviews.sql	Create Production Control views on staging schema
createck_tbls.sql	Creates Conversion Key tables on staging schema
createck_pkix.sql	Creates primary indexes on Conversion key tables
createck_secix.sql	Creates secondary indexes on Conversion key tables

createcr_tbls.sql	Creates XML/CLOB Resolution tables on staging schema
create_stggrants.sql	Grants select, insert permissions on above created staging objects to staging read/write user
restore_ctltbls.sql	Restores Control tables
drop_cxviews.sql	Restored Conversion X views
drop_tables.sql	Restores CK & CR tables

After the staging schema has been set up, generate the security for the staging user following the steps in the [Configuring Security](#) section.

#### UNIX:

```
UNIX: java -Xmx1500M com.oracle.ouaf.oem.install.OraGenSec-
d<STAGING_DBUSER>,< STAGING_DBPASS>,
jdbc:oracle:thin:@<DB_SERVER>:<PORT>/<SID> -u
<STAGING_RW_USER>,<STAGING_R_USER> -r <STAGING_RW_USER_ROLE>,<
STAGING_R_USER_ROLE> -a A -p <STAGING_RW_USER>,<STAGING_R_USER>
```

#### WINDOWS:

```
"%JAVA_HOME%"\bin\java -Xmx1500M com.oracle.ouaf.oem.install.OraGenSec
-d < STAGING_DBUSER>,< STAGING_DBPASS>,
jdbc:oracle:thin:@<DB_SERVER>:<PORT>/<SID> -u
<STAGING_RW_USER>,<STAGING_R_USER> -r <STAGING_RW_USER_ROLE>,<
STAGING_R_USER_ROLE> -a A -p <STAGING_RW_USER>,<STAGING_R_USER>
```

# Chapter 6

---

## Information Lifecycle Management and Data Archiving in CCB

Oracle Utilities Customer Care and Billing provides support for Information Lifecycle Management (ILM) and Data Archiving.

ILM is process to address data management issues, with a combination of processes, policies, software and hardware so that the appropriate technology can be used for each phase of the lifecycle of the data. The lifecycle of data typically refers to the fact that the most recent data is active in the system and as time passes the data is accessed less frequently or not at all. The costs of storing data that are accessed infrequently can be reduced by moving the data to lower cost mass storage media. Typically this involves a trade-off between cost and increased access times. Based on business needs, data may eventually be archived and purged from the database and kept offline ready to be restored if required.

This chapter includes:

- [ILM Implementation Overview](#)
- [ILM Implementation Components](#)
- [ILM Database Administrator's Tasks](#)

# ILM Implementation Overview

The implementation of ILM for products based on Oracle Utilities Application Framework includes a combination of application and database configuration and requires Oracle Partitioning.

An underlying design principle of the Oracle Utilities Application Framework ILM implementation is the concept that the age of the data may not be the only criterion used to determine when a record is able to be archived. There may be business rules that dictate that some records are still current and must not be archived yet.

ILM enabled objects have a combination of an ILM date and an ILM Archive Switch. The ILM date is used in conjunction with partitioning to group data by age. The ILM Archive Switch is set by a background process when the record meets the business rules specific to that Maintenance Object if the record is eligible to be archived. The ILM Archive Switch gives Database Administrators an easy method to check when all records in a partition meet the business criteria that make the partition eligible to be archived. If the ILM Archive Switch is set for all records, then the DBA can take the steps required to archive the partition.

Moving data between storage tiers takes advantage of the partitioning by ILM Date but does not require that the ILM Archive Switch is set. Oracle recommends using the Oracle Database ILM Assistant to assist with this process.

## ILM Implementation Components

The ILM based solution contains a number of components.

- ILM Specific Table Columns - For any Maintenance Object (MO) that has been configured to support ILM, the primary table of the MO includes two columns: ILM Date and ILM Archive Switch.
  - ILM\_DT - This date column is defaulted to an appropriate date (typically the system date) when a new record is inserted, the MO is partitioned on the ILM\_DT, so it should only be updated in exceptional circumstances as this would cause the record to be deleted from its current partition and inserted into a different partition, which is a relatively expensive operation.
  - ILM\_ARCHIVE\_SW - This field is set to N (Not yet eligible for archiving) when a new record is inserted. Subsequent reviews of "old" records may assess the data and change the value to "Y" based on business rules indicating that the record is eligible to be archived.
- Database Referential Integrity Constraints - These are required for reference partitioning of Child tables of ILM enabled MOs
- Partitioning - Partitioning is mandatory for ILM implementation. It is used to separate the data by ILM date so that data of a similar age is kept together.
- One Tablespace per Partition - The ILM implementation requires that each MO partition resides in a dedicated tablespace so that they can be easily managed.
- [Naming Convention](#) - This section covers the recommended naming convention to be used for partitions/subpartitions and tablespaces.

# ILM Database Administrator's Tasks

For a database administrator, there are two key phases involved with managing your data using ILM.

- [Preparation Phase](#) - This phase covers the database level configuration that needs to be done before the ILM solution runs in a production environment.
- [On-going Maintenance Phase](#) - This phase covers the ongoing maintenance tasks such as add partition, archive and restore partitions.

## Preparation Phase

**Note:** In order to successfully implement ILM as described here, the following database version and patch are pre-requisites: version 12.1.0.2.0 and Patch 15996848.

The steps needed to enable ILM functionality differ depending on whether ILM is enabled as part of the initial implementation of the product or enabled ILM on an existing implementation where data already exists in the respective tables.

- **Initial Install** – For an initial installation, the section [Module Specific ILM Implementation Details](#) outlines the additional steps to be performed on base delivered ILM Enabled Tables to conform to ILM requirements. In addition, [Appendix A: Sample SQL for Enabling ILM in CCB \(Initial Install\)](#) provides sample reference DDLs using two maintenance objects as examples.
- **Transform NON-ILM implementation to ILM Enabled Implementation:** The following steps provide a high level overview of steps that must be performed to implement ILM on enabled MOs for an existing implementation. Please refer to [Appendix B: Sample SQL For Enabling ILM in CCB \(Existing Installation\)](#) for detailed information using To Do Entry as an example.
  1. Rename the existing tables (Parent table followed by child table(s)), and primary key index associated with ILM enabled MOs by renaming the tables.
  2. Save the DDLs for the secondary indexes as you will need to recreate them later.
  3. Drop secondary indexes on the renamed tables.
  4. Create Partitioned table with no secondary indexes for ILM enabled MOs using a CTAS operation (Create Table as Select), which will also load the data into the partitioned table structure.

**Functional Note:** ILM enabled MOs should have the ILM date (ILM\_DT) populated when data is moved into the new partitioned table. Please refer to the [Module Specific ILM Implementation Details](#) section below for initial load details on which date column to use as the basis for populating the ILM date. Often it is based on Create Date (CRE\_DTTM). ILM\_ARCH\_SW should initially be set to 'N'.

5. Enable logging option.
6. Create Primary Key index.
7. Create Primary Key Constraint of parent table.
8. Create secondary indexes for the newly-created partitioned tables. This includes creating an index used specifically to benefit the ILM Crawler batch. The recommendation for this index name is to prefix it with "ILM".



**Note:** This can be created specifying parallel index create; remember to turn off parallelism after the index is created.

9. Follow similar operation for all child tables for this MO, such as rename child table, and primary key index, generate DDL for secondary index, drop secondary index etc. Sample DDL for child tables their partitioning and indexes can be found in [Appendix B: Sample SQL For Enabling ILM in CCB \(Existing Installation\)](#). Please note that child table should be partitioned using reference partitioning of the parent table's partitioning key.
10. Drop the original, renamed tables after verifying the newly created partitioned tables.

## On-going Maintenance Phase

The following steps provide a high level overview of what needs to be done for on-going maintenance for ILM on enabled maintenance objects.

Please refer to the [Appendix C: Sample SQL for Periodic Maintenance](#) for detailed information using two maintenance objects as examples.

1. Add the partition:
  - a. Create Tablespace to be used for the new parent table partition.
  - b. Since, we define MAXVALUE Partition; new partition can only be created using "SPLIT" operation. Identify and use next HIGH\_VALUE Partition for the split operation.
  - c. All the child table(s) partition(s)\LOB(s) must be altered to use the same tablespace as that of the parent table's partition.
  - d. Enable advanced compression on all child table(s).
  - e. Copy partition level statistics from the previous partition
2. Archive the partition:
  - a. Make the tablespace that will be archived READ ONLY.
  - b. Check that no records have ILM\_ARCH\_SW = 'N'.
    - If record count is zero, proceed with further steps.
    - If record count is not zero, then change the tablespace back to READ WRITE MODE as Archive is not Feasible at the time.
  - c. Create an archive tablespace for the partition that needs to be archived.
  - d. Create staging tables using the new archive tablespace. Load data for all child tables first.
  - e. Create staging table using the new archive tablespace and load data for the parent table.
  - f. Export tablespace using TRANSPORT\_TABLESPACES method.
 

Make Sure Tablespace datafile required for further import is preserved.
  - g. Drop the partition, partition the tablespace and archive the tablespace (as it is already exported).

3. Restore the partition:
  - a. Create a new tablespace to restore the partition.
  - b. Add partition using split operation on next greater high value partition.

If the table contains LOBS, there will an additional statement in split partition DDL indicating tablespace where the LOBs will be stored.

- c. Enable advanced compression on all child table(s).
  - d. Import Tablespace using TRANSPORT\_TABLESPACES method.
  - e. Load data into the parent table first from the staging table
  - f. Load data into the child table from the staging table
  - g. Drop the archive tablespace after import and data loading is successful.
4. Move Data between different storage tiers:

The ILM facilities can be used within the database to implement storage savings, as follows:

- Use ILM Assistant to define the data groups to be used for the individual objects. Assign those data groups to partitions and storage devices to implement the storage savings.
- Use ILM assistant to generate the necessary commands to implement the data changes manually or use Automatic Storage Management (ASM) to automate the data storage policies.
- Optionally, use Automatic Data Optimization to provide further optimizations.

For more information about ILM Assistant and ILM refer to the following:


- ILM Assistant Users Guide available at:  
<http://download.oracle.com/otn/other/ilm/ilma-users-guide.html>
- Oracle Database VLDB and Partitioning Guide (11.2) available at:  
[http://docs.oracle.com/cd/E11882\\_01/server.112/e25523/part\\_lifecycle.htm#CACCEAFB](http://docs.oracle.com/cd/E11882_01/server.112/e25523/part_lifecycle.htm#CACCEAFB)
- Oracle Database VLDB and Partitioning Guide (12.1) available at:  
<https://docs.oracle.com/database/121/VLDBG/title.htm>

## ILM Assistant

The ILM Assistant in the current 11g database implementation can provide the following

- Setup ILM Lifecycle definition - Define different lifecycle definitions for different MOs and say that after what period of time the data is ready to be moved to a slower disk.
- Setup ILM Lifecycle tables - Define the tables you want to manage and assign it to a Lifecycle definition defined above. You can setup policies for when data is moved it can be automatically compressed to desired degree.
- Lifecycle Management - The Lifecycle Management tab alerts the system admin when partitions are eligible for archiving.

ILM Assistant can then be used with the ILM to make sure the records that have ILM\_ARCH\_SW = 'Y' can be moved to slower and slower disks and possibly get purged.

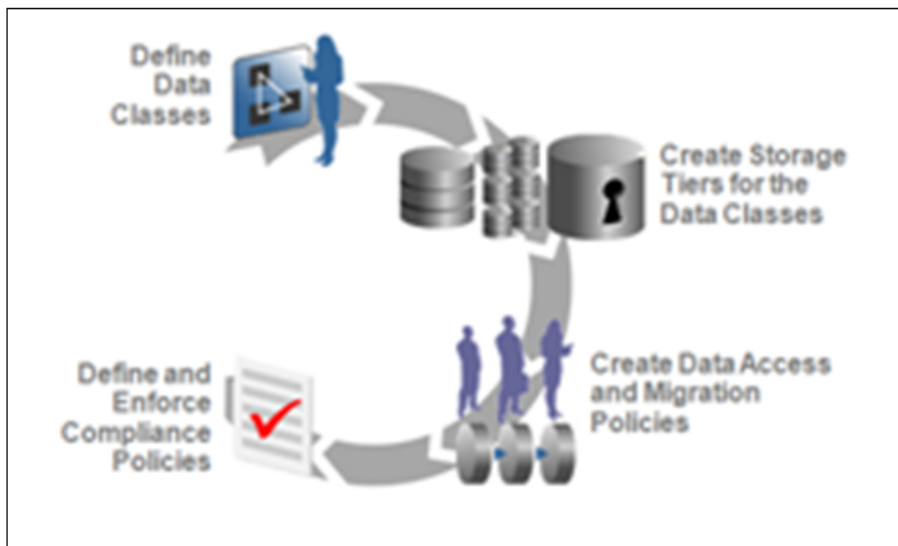

**Note:** For further guidelines on ILM Assistant refer to Implementing Information Lifecycle Management Using the ILM Assistant available at: <http://www.oracle.com/webfolder/technetwork/tutorials/obe/db/11g/r2/prod/storage/ilm/ilm.htm?cid=4196&ssid=115606280996764>

## Naming Convention

The naming convention for tablespace, partitions & subpartition is standardized as follows

- Each name consists of some or all of the following parts
- The parts of the name are organized hierarchically
- Each part of the Name is separated with an underscore.
- The maximum name length must not exceed 30 Characters.
- For an MO, the parent table and child table share the same tablespace for the corresponding partition (or sub partition as appropriate).
- Square brackets [ ] indicate that this part of the name should be omitted if not required.

OWNERFLAG\_TABLEIDENTIFIER\_PARTITIONNAME[\_SUBPARTITIONNAME][\_ARCHIVEFLAG][\_COMPRESSFLAG]

For details on the convention, please refer to the table below:

Convention	Description
OWNERFLAG	Owner flag for the relevant application for example “C1” for CCB

Convention	Description
TABLE IDENTIFIER	The Index Name of the Primary Key index without the “P0” suffix. For example, if the PK index name is XT039P0, the table identifier would be “XT039”.
PARTITION NAME	The Partition name should be prefixed with a P followed by a name which conforms to one of the following standards: <ul style="list-style-type: none"> <li>• 4 digit year and 3 letter month abbreviation PYYYYMON corresponding to the ILM date e.g. P2017JAN</li> <li>• PMAX if it is the Max Value partition</li> </ul>
SUBPARTITION NAME	If subpartitions are used, name should be prefixed with S followed by a name of not more than 5 characters which conforms to the following requirements: <ul style="list-style-type: none"> <li>• SMAX if this is the Max Value sub partition</li> <li>• If the sub partition holds data for a sub retention period use a number equal to that period e.g S91 if the sub retention period &lt; 91 days.</li> <li>• For a range based SubPartition on Primary Key, use an integral number increasing by +1. For example, if there are 8 sub partitions use S01 through S08</li> </ul>
ARCHIVEFLAG	This flag is used as a suffix to the table and tablespace name for the staging tables created for the archiving operation. <ul style="list-style-type: none"> <li>• ARC</li> </ul>

Convention	Description
COMPRESS FLAG	<p>This flag is used as a suffix to the tablespace name for the staging tables created when compressing a partition.</p> <ul style="list-style-type: none"> <li>• C</li> </ul> <p>For compression related tasks, this is used as suffix to the tablespace name.</p> <ul style="list-style-type: none"> <li>• Partition Tablespace Name: It is formed by OWNERFLAG_TABLEIDENTIFIER_PARTITIONNAME.  For example: CM_D1T304_PMAX CM_D1T304_P2017JAN</li> <li>• SubPartition Tablespace Name: It is formed by OWNERFLAG_TABLEIDENTIFIER_PARTITIONNAME_SUBPARTITIONNAME.  For example: CM_D1T304_PMAX_SMAX CM_D1T304_P2017JAN_SMAX CM_D1T304_PMAX_S001 CM_D1T304_P2017JAN_S181</li> <li>• Archive Staging Table And Its Tablespace Name (When archiving partition): It is formed by OWNERFLAG_TABLEIDENTIFIER_PARTITIONNAME_ARCHIVEFLAG.  For example: CM_D1T304_P2017JAN_ARC</li> <li>• Archive Staging Table And Its Tablespace Name (When archiving subpartition): It is formed by OWNERFLAG_TABLEIDENTIFIER_PARTITIONNAME_SUBPARTITIONNAME_ARCHIVEFLAG.  For example: CM_D1T304_P2017JAN_S181_ARC</li> <li>• Compressed Tablespace name (When compressing partition):  For example: CM_D1T304_P2017JAN_C</li> </ul>

---

## Module Specific ILM Implementation Details

This section outlines each maintenance object that has been configured to support ILM. The parent table is noted. Other tables are child tables of the parent unless otherwise noted. In each case, the partitioning strategy is indicated.

All indexes are listed with a recommendation whether the index should be global or local and whether the index should be partitioned. In addition to the base delivered indexes, each parent table includes a recommended ILM specific local index to build with the ILM\_DT, ILM\_ARCH\_SW and the primary key of the table. The recommended column that should be used to populate the ILM\_DT is also shown. Refer to [Appendix B: Sample SQL For Enabling ILM in CCB \(Existing Installation\)](#) for sample DDL(s).

The following maintenance tables are included:

- [To Do Entry](#)
- [Sync Request \(Outbound\)](#)
- [Inbound Sync Request](#)
- [Outbound Message](#)
- [Service Task](#)
- [Object Revision](#)
- [Object Erasure](#)
- [Process Flow](#)
- [Adjustment](#)
- [Approval Request](#)
- [Bill](#)
- [Bill Segment](#)
- [Statement](#)
- [Off Cycle Bill Generator](#)
- [Billable Charge](#)
- [Case](#)
- [Field Activity](#)
- [Enrollment \(Order\)](#)
- [Payment Event](#)
- [Payment](#)
- [Match Event](#)
- [Usage Request](#)
- [Business Flag](#)
- [Remote Message](#)
- [Statistics Snapshot](#)
- [Customer Relationship Request](#)
- [Customer Contact](#)

- Collection Process
- Cut Process
- Overdue Process
- Severance Event
- WO Process
- General Audit
- Meter Read
- Payment Arrangement Process
- Customer Service Request
- Customer Service Request Account
- Customer Service Request Consumer Contract
- Customer Service Request Contract Product
- Customer Service Request Person
- Customer Service Request Service Location
- Customer Service Request Premise
- Market Charge
- Market Payment
- Market Usage
- Customer Service Request SA
- SA Arrears Snapshot

### To Do Entry

This table describes the To Do Entry maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
CI_TD_ENTRY (Parent)	RANGE (ILM_DT, TD_ENTRY_ID)				RANGE (TD_ENTRY_ID)	CI_TD_ENTRY. CRE_DTTM
		XT039P0	TD_ENTRY_ID	Global Partitioned		
		XT039S2	ASSIGNED_TO, TD_ENTRY_ID	Global		
		XT039S3	ENTRY_STATUS_FLG, ASSIGNED_TO	Global		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
		XT039S4	ROLE_ID, TD_TYPE_CD, ENTRY_STATUS_FLG, TD_PRIORITY_FLG, ASSIGNED_TO, CRE_DTTM	Global		
		XT039S5	BATCH_CD, BATCH_NBR, ENTRY_STATUS_FLG	Global		
		XT039S6	TD_ENTRY_ID, ASSIGNED_TO, ENTRY_STATUS_FLG	Global		
		XT039S7	COMPLETE_USER_ID, COMPLETE_DTTM, TD_ENTRY_ID	Global		
		CM_ILM_ XT039S8	ILM_DT, ILM_ARCH_SW, TD_ENTRY_ID	Local Partitioned		
CI_TD_ENTRY_ CHA	Reference Partitioning	XT701P0	TD_ENTRY_ID, CHAR_TYPE_CD, SEQ_NUM	Global Partitioned		
		XT701S1	SRCH_CHAR_VAL, CHAR_TYPE_CD, TD_ENTRY_ID	Global		
		XT701S2	CHAR_VAL_FK1	Global		
CI_TD_DRLKEY	Reference Partitioning	XT037P0	TD_ENTRY_ID, SEQ_NUM	Global Partitioned		
		XT037S1	KEY_VALUE, TD_ENTRY_ID	Global		
CI_TD_LOG	Reference Partitioning	XT721P0	TD_ENTRY_ID, SEQ_NUM	Global Partitioned		
		XT721S1	LOG_DTTM, USER_ID, LOG_TYPE_FLG, TD_ENTRY_ID	Global		
CI_TD_MSG_ PARM( Child table of CI_TD_LOG)	Reference Partitioning	XT040P0	TD_ENTRY_ID, SEQ_NUM	Global Partitioned		
CI_TD_SRTKEY	Reference Partitioning	XT041P0	TD_ENTRY_ID, SEQ_NUM	Global Partitioned		
		XT041S1	KEY_VALUE, TD_ENTRY_ID	Global		



**Sync Request (Outbound)**

This table describes the Sync Request (Outbound) maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
F1_SYNC_REQ (Parent)	RANGE (ILM_DT, F1_SYNC_REQ_ ID)				RANGE (F1_SYNC_REQ_ ID)	F1_SYNC_REQ.C RE_DTTM
		F1T014P0	F1_SYNC_REQ_ID	Global Partitioned		
		F1T014S1	BO_STATUS_CD, BUS_OBJ_CD, F1_SYNC_REQ_ID	Global		
		F1T014S2	BO_STATUS_ REASON_CD	Global		
		F1T014S3	MAINT_OBJ_CD, PK_VALUE1, PK_VALUE2, F1_SYNC_REQ_ID	Global		
		CM_ILM_F1T014 S4	ILM_DT, ILM_ARC_SW, F1_SYNC_REQ_ID	Local Partitioned		
F1_SYNC_REQ_C HAR	Reference Partitioning	F1T017P0	F1_SYNC_REQ_ID, CHAR_TYPE_CD, SEQ_NUM	Global Partitioned		
		F1T017S1	SRCH_CHAR_VAL	Global		
F1_SYNC_REQ_E XTRACT	Reference Partitioning	F1T019P0	F1_SYNC_REQ_ID, SEQ_NUM	Global Partitioned		
F1_SYNC_REQ_L OG	Reference Partitioning	F1T015P0	F1_SYNC_REQ_ID, SEQNO	Global Partitioned		
		F1T015S1	CHAR_TYPE_CD, CHAR_VAL_FK1	Global		
		F1T015S2	CHAR_TYPE_CD, CHAR_VAL	Global		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
		F1T015S3	BO_STATUS_REAS ON_CD	Global		
F1_SYNC_REQ_L OG_PARM (Child Table of F1_SYNC_REQ_L OG_PARM)	Reference Partitioning	F1T016P0	F1_SYNC_REQ_ID, SEQNO, PARM_SEQ	Global Partitioned		

**Note:** It is recommended that data retention policies and rules for this object match the policies and rules implemented for the Inbound Sync Request on the target system to avoid data inconsistencies when auditing.

### Inbound Sync Request

This table describes the Inbound Sync Request maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
F1_SYNC_REQ_IN (Parent)	RANGE(ILM_DT, F1_SYNC_REQ_IN _ID)				RANGE (F1_SYNC_REQ_ IN_ID)	F1_SYNC_REQ_I N.CRE_DTTM
		F1T191P0	F1_SYNC_REQ_ IN_ID	Global Partitioned		
		F1T191S1	BO_STATUS_CD, BUS_OBJ_CD, F1_SYNC_REQ_ IN_ID	Global		
		F1T191S2	MAINT_OBJ_CD, EXT_PK_VALUE 1,NT_XID_CD, PK_VALUE1	Global		
		F1T191S3	EXT_REFERENC E_ID	Global		
		CM_ILM_F1T191 S3	ILM_DT, ILM_ARCH_SW, F1_SYNC_REQ_I N_ID	Local Partitioned		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
F1_SYNC_REQ_IN_CHAR	Reference Partitioning	F1T193P0	F1_SYNC_REQ_I N_ID, CHAR_TYPE_CD, SEQ_NUM	Global Partitioned		
		F1T193S1	SRCH_CHAR_VA L	Global		
F1_SYNC_REQ_IN_EXCP	Reference Partitioning	F1T197P0	F1_SYNC_REQ_I N_ID, SEQNO	Global Partitioned		
F1_SYNC_REQ_IN_EXCP_PARM (Child Table of F1_SYNC_REQ_IN_EXCP)	Reference Partitioning	F1T198P0	F1_SYNC_REQ_I N_ID, SEQNO, PARAM_SEQ	Global Partitioned		
F1_SYNC_REQ_IN_LOG	Reference Partitioning	F1T194P0	F1_SYNC_REQ_I N_ID, SEQNO	Global Partitioned		
		F1T194S1	CHAR_TYPE_CD, CHAR_VAL_FK1	Global		
		F1T194S2	CHAR_TYPE_CD, CHAR_VAL	Global		
F1_SYNC_REQ_IN_LOG_PARM (Child Table of F1_SYNC_REQ_IN_LOG)	Reference Partitioning	F1T195P0	F1_SYNC_REQ_I N_ID, SEQNO, PARAM_SEQ	Global Partitioned		
F1_SYNC_REQ_IN_REL_OBJ	Reference Partitioning	F1T192P0	F1_SYNC_REQ_I N_ID, MAINT_OBJ_CD, REL_OBJ_TYPE_ FLG	Global Partitioned		
		F1T192S1	PK_VALUE1	Global		

**Note:** It is recommended that data retention policies and rules for this object match the policies and rules implemented for the Outbound Sync Request on the source system to avoid data inconsistencies when auditing.

## Outbound Message

This table describes the Outbound Message maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
F1_OUTMSG (Parent)	RANGE (ILM_DT, OUTMSG_ID)				RANGE (OUMSG_ID)	F1_OUTMSG.CRE_DTTM
		FT010P0	OUTMSG_ID	Global Partitioned		
		FT010S1	OUTMSG_STAT US_FLG, OUTMSG_TYPE_CD	Global		
		CM_ILM_FT010S2	ILM_DT, ILM_ARC_SW, OUTMSG_ID	Local Partitioned		
F1_OUTMSG_ERRPARM	Reference Partitioning	FT011P0	OUTMSG_ID, PARM_SEQ	Global Partitioned		

## Service Task

This table describes the Service Task maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
F1_SVC_TASK (Parent)	RANGE (ILM_DT, F1_SVC_TASK_ID)				RANGE (F1_SVC_TASK_ID)	F1_SVC_TASK.CRE_DTTM
		F1C474P0	F1_SVC_TASK_ID	Global Partitioned		
		F1C474S1	F1_STASK_TYPE_CD	Global		
		F1C474S2	BUS_OBJ_CD	Global		
		CM_ILM_F1C474S3	ILM_DT, ILM_ARC_SW, F1_SVC_TASK_ID	Local Partitioned		
F1_SVC_TASK_CHAR	Reference Partitioning	F1C476P0	F1_SVC_TASK_ID, CHAR_TYPE_CD, SEQ_NUM	Global Partitioned		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
		F1C476S1	SRCH_CHAR_VAL	Global		
F1_SVC_TASK_LOG	Reference Partitioning	F1C477P0	F1_SVC_TASK_ID, SEQNO	Global Partitioned		
		F1C477S1	CHAR_TYPE_CD, CHAR_VAL_FK1	Global		
		F1C477S2	CHAR_TYPE_CD, CHAR_VAL	Global		
F1_SVC_TASK_LOG_PARM (Child Table of F1_SVC_TASK_LOG)	Reference Partitioning	F1C478P0	F1_SVC_TASK_ID, SEQNO, PARM_SEQ	Global Partitioned		
F1_SVC_TASK_REL_OBJ	Reference Partitioning	F1C479P0	F1_SVC_TASK_ID, MAINT_OBJ_CD, SEQ_NUM	Global Partitioned		
		F1C479S1	MAINT_OBJ_CD, PK_VALUE1, PK_VALUE2, PK_VALUE3, PK_VALUE4, PK_VALUE5	Global		

### Object Revision

This table describes the Object Revision maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
F1_OBJ_REV (Parent)	RANGE (ILM_DT, REV_ID)				RANGE (REV_ID)	F1_OBJ_REV, STATUS_UPD_D, TTM
		FT035P0	REV_ID	Global Partitioned		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
		FT035S1	BO_STATUS_CD, BUS_OBJ_CD, REV_ID	Global		
		FT035S2	MAINT_OBJ_CD, PK_VALUE1	Global		
		FT035S3	EXT_REFERENCE_ID, MAINT_OBJ_CD	Global		
		FT035S4	USER_ID, MAINT_OBJ_CD	Global		
		FT035S5	PK_VALUE1	Global		
		CM_ILM_ FT035S6	ILM_DT, ILM_ARC_SW, REV_ID	Local Partitioned		
F1_OBJ_REV_ CHAR	Reference Partitioning	FT037P0	REV_ID, CHAR_TYPE_CD, SEQ_NUM	Global Partitioned		
		FT037S1	SRCH_CHAR_VAL	Global		
F1_OBJ_REV_ LOG	Reference Partitioning	FT039P0	REV_ID, SEQNO	Global Partitioned		
F1_OBJ_REV_ LOG_PARM (Child Table of F1_OBJ_REV_ LOG)	Reference Partitioning	FT040P0	REV_ID, SEQNO, PARM_SEQ	Global Partitioned		

**Note:** This maintenance object is enabled for ILM, however it is not used in a production environment. It is typically used in a development or configuration environment. Your implementation should review its use of this functionality and consider whether or not it is a candidate for ILM and in which region.

## Object Erasure

This table describes the Object Erasure maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
F1_ERASURE_SCHED (Parent)	RANGE (ILM_DT, ERASURE_SCHE D_ID)					F1_ERASURE_SCHED, STATUS_UPD_DTTM.
		F1T756P0	ERASURE_SCHED_ID	GLOBAL Partitioned	RANGE (ERASURE_SCHED_ID)	
		CM_ILM_F1T756S1	ILM_DT, ILM_ARCH_SW, ERASURE_SCHED_ID	LOCAL Partitioned		
F1_ERASURE_SCHED_LOG	Reference partitioning	F1T757P0	ERASURE_SCHE D_ID, SEQNO	GLOBAL Partitioned		
F1_ERASURE_SCHED_LOG_PARM	Reference partitioning	F1T758P0	ERASURE_SCHE D_ID, SEQNO, PARM_SEQ	GLOBAL Partitioned		

## Process Flow

This table describes the Process Flow maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
F1_PROC_STORE (Parent)	RANGE (ILM_DT, PROC_STORE_ID)					F1_PROC_STORE, STATUS_UPD_DTTM.
		F1T747P0	PROC_STORE_ID	GLOBAL Partitioned	RANGE (PROC_STORE_ID)	
		CM_ILM_F1T747S1	ILM_DT, ILM_ARCH_SW, PROC_STORE_ID	LOCAL Partitioned		
F1_PROC_STORE_DTL_ELEMENTS	Reference partitioning	F1T748P0	PROC_STORE_ID, CHAR_TYPE_CD, SEQ_NUM	GLOBAL Partitioned		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
F1_PROC_STOR E_LOG	Reference partitioning	F1T749P0	PROC_STORE_ID, SEQNO	GLOBAL Partitioned		
F1_PROC_STOR E_LOG_PARM	Reference partitioning	F1T750P0	PROC_STORE_ID, SEQNO, PARM_SEQ	GLOBAL Partitioned		

### Adjustment

This table describes the Adjustment maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
CI_ADJ (Parent)	RANGE (ILM_DT, ADJ_ID)				RANGE (ADJ_ID)	CI_ADJ.CRE_DT
		XT012P0	ADJ_ID	Global Partitioned		
		XT012S1	SA_ID, ADJ_TYPE_CD	Global		
		XT012S2	XFER_ADJ_ID, ADJ_ID	Global		
		XT012S4	APPR_REQ_ID, ADJ_ID	Global		
		CM_ILM_ XT012S3	ILM_DT, ILM_ARCH_SW, ADJ_ID	Local Partitioned		
CI_ADJ_APREQ	Reference Partitioning	XT160P0	AP_REQ_ID	Global		
		XT160S1	ADJ_ID	Global		
		XT160S2	BATCH_CD, BATCH_NBR	Global		



Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
CI_ADJ_CALC_LN	Reference Partitioning	XT310P0	ADJ_ID, SEQNO	Global Partitioned		
CI_ADJ_CL_CHAR	Reference Partitioning	XT309P0	ADJ_ID, SEQNO, CHAR_TYPE_CD	Global Partitioned		
CI_ADJ_CHAR	Reference Partitioning	XC781P0	ADJ_ID, CHAR_TYPE_CD, SEQ_NUM	Global Partitioned		
		XC781S1	SRCH_CHAR_VAL	Global		

### Approval Request

This table describes the Approval Request maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
CI_APPR_REQ (Parent)	RANGE (ILM_DT, APPR_REQ_ID)				RANGE (APPR_REQ_ID)	MIN(LOG_DTTM) on CI_APPR_REQ_LOG for given APPR_REQ_ID
		XT600P0	APPR_REQ_ID	Global Partitioned		
		CM_ILM_XT600S1	ILM_DT, ILM_ARCH_SW, APPR_REQ_ID	Local partitioned		
CI_APPR_REQ_CHAR	Reference Partitioning	XT601P0	APPR_REQ_ID, CHAR_TYPE_CD, SEQ_NUM	Global Partitioned		
		XT601S1	SRCH_CHAR_VAL	Global		
CI_APPR_REQ_LOG	Reference Partitioning	XT602P0	APPR_REQ_ID, SEQNO	Global Partitioned		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
		XT602S1	CHAR_TYPE_CD, CHAR_VAL_FK1	Global		
CI_APPR_REQ_LOG_PARM	Reference Partitioning	XT603P0	APPR_REQ_ID, SEQNO, PARM_SEQ	Global Partitioned		

### Bill

This table describes the Bill maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
CI_BILL (Parent)	RANGE (ILM_DT, BILL_ID)				RANGE (BILL_ID)	CI_BILL.CRE_ID TTM
		XT033P0	BILL_ID	Global Partitioned		
		XT033S1	ACCT_ID, BILL_STAT_FLG, BILL_CYC_CD, WIN_START_DT, CR_NOTE_FR_BILL_ID	Global		
		XT033S2	CR_NOTE_FR_BILL_ID, BILL_ID	Global		
		XT033S3	ALT_BILL_ID, BILL_STAT_FLG, BILL_ID	Global		
		XT033S4	OFFCYC_BGEN_ID, BILL_ID	Global		
		XT033S5	DOC_ID, DOC_TYPE_FLG, BILL_STAT_FLG, BILL_ID	Global		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
		CM_ILM_XT033S6	ILM_DT, ILM_ARCH_SW, BILL_ID	Local Partitioned		
		XT033S7	ACCT_ID, OFFCYC_BGEN_ID, CRE_DTTM	Global		
		XT033S8	LATE_PAY_CHARGE_SW, LATE_PAY_CHARGE_DT, BILL_ID	Global		
CI_BILL_CHAR	Reference Partitioning	XT313P0	BILL_ID, CHAR_TYPE_CD, SEQ_NUM	Global Partitioned		
		XT313S1	SRCH_CHAR_VAL	Global		
CI_BILL_EXCP	Reference Partitioning	XT038P0	BILL_ID	Global Partitioned		
CI_BILL_MSGS	Reference Partitioning	XT091P0	BILL_ID, BILL_MSG_CD	Global Partitioned		
CI_BILL_MSG_PRM	Reference Partitioning	XT085P0	BILL_ID, BILL_MSG_CD, SEQ_NUM	Global Partitioned		
CI_BILL_SA	Reference Partitioning	XT046P0	BILL_ID, SA_ID	Global Partitioned		
		XT046S1	SA_ID	Global		
CI_BILL_ROUTING	Reference Partitioning	XT075P0	BILL_ID, SEQNO	Global Partitioned		
		XT075S1	BATCH_CD, BATCH_NBR, BILL_ID, NO_BATCH_PRT_SW	Global		

**Bill Segment**

This table describes the Bill Segment maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
CI_BSEG (Parent)	RANGE (ILM_DT, BSEG_ID)				RANGE (BSEG_ID)	CI_BSEG.CRE_D TTM
		XT048P0	BSEG_ID	Global Partitioned		
		XT048S1	BILL_ID	Global		
		XT048S2	SA_ID	Global		
		XT048S3	QUOTE_DTL_ ID, BSEG_ID	Global		
		CM_ILM_ XT048S4	ILM_DT, ILM_ARCH_SW, BSEG_ID	Local Partitioned		
CI_BSEG_CALC	Reference partitioning	XT072P0	BSEG_ID, HEADER_SEQ	Global Partitioned		
		XT072S1	BILLABLE_CHG _ID, BSEG_ID	Global		
CI_BSEG_CALC _LN	Reference partitioning	XT050P0	BSEG_ID, HEADER_SEQ, SEQNO	Global Partitioned		
CI_BSEG_CL_ CHAR	Reference partitioning	XT056P0	BSEG_ID, HEADER_SEQ, SEQNO, CHAR_TYPE_ CD	Global Partitioned		
CI_BSEG_EXCP	Reference partitioning	XT051P0	BSEG_ID	Global Partitioned		
CI_BSEG_MSG	Reference partitioning	XT080P0	BSEG_ID, BILL_MSG_CD	Global Partitioned		
CI_BSEG_READ	Reference partitioning	XT054P0	BSEG_ID,SP_ID, SEQNO	Global Partitioned		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
		XT054S1	SP_ID	Global		
		XT054S2	START_REG_RE AD_ID	Global		
		XT054S3	END_REG_ READ_ID	Global		
CL_BSEG_SQ	Reference partitioning	XT055P0	BSEG_ID, UOM_CD, TOU_CD, SQL_CD	Global Partitioned		
CL_BSEG_ITEM	Reference partitioning	XT053P0	BSEG_ID, SEQNO	Global Partitioned		

### Statement

This table describes the Statement maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
CL_STM (Parent)	RANGE (ILM_DT, STM_ID)				RANGE (STM_ID)	CL_STM.STM_DT
		XT088P0	STM_ID	Global Partitioned		
		CM_ILM_ XT088S1	ILM_DT, ILM_ARCH_SW, STM_ID	Local Partitioned		
CL_STM_DTL		XT119P0	STM_DTL_ID	Global		
		XT119S1	STM_ID	Global		

## Off Cycle Bill Generator

This table describes the Off Cycle Bill Generator maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
C1_OFFCYC_BGEN (Parent)	RANGE (ILM_DT, OFFCYC_BGEN_ID)				RANGE (OFFCYC_BGEN_ID)	C1_OFFCYC_BGEN.STATUS_UPD_DTTM
		XT197P0	OFFCYC_BGEN_ID	Global Partitioned		
		XT197S1	ACCT_ID	Global		
		CM_ILM_XT197S2	ILM_DT, ILM_ARCH_SW, OFFCYC_BGEN_ID	Local Partitioned		
C1_OFFCYC_BGEN_ADJ	Reference partitioning	XT285P0	OFFCYC_BGEN_ID, ADJ_ID	Global Partitioned		
		XT285S1	ADJ_ID	Global		
C1_OFFCYC_BGEN_BCHG	Reference partitioning	XT326P0	OFFCYC_BGEN_ID, BILLABLE_CHG_ID	Global Partitioned		
		XT326S1	BILLABLE_CHG_ID	Global		
C1_OFFCYC_BGEN_CHAR	Reference partitioning	XT343P0	OFFCYC_BGEN_ID, CHAR_TYPE_CD, SEQ_NUM	Global Partitioned		
		XT343S1	SRCH_CHAR_VAL	Global		
C1_OFFCYC_BGEN_LOG	Reference partitioning	XT344P0	OFFCYC_BGEN_ID, SEQNO	Global Partitioned		
		XT344S1	CHAR_TYPE_CD, CHAR_VAL_FK1	Global		
C1_OFFCYC_BGEN_LOG_PARM	Reference partitioning	XT357P0	OFFCYC_BGEN_ID, SEQNO, PARM_SEQ	Global Partitioned		
C1_OFFCYC_BGEN_SA	Reference partitioning	XT359P0	OFFCYC_BGEN_ID, SA_ID	Global Partitioned		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
		XT359S1	SA_ID	Global		

### Billable Charge

This table describes the Billable Charge maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
CI_BILL_CHG (Parent)	RANGE (ILM_DT, BILLABLE_CHG_ID)				RANGE (BILLABLE_CHG_ID)	CI_BILL_CHG.S TART_DT
		XT035P0	BILLABLE_CHG_ID	Global Partitioned		
		XT035S1	SA_ID	Global		
		CM_ILM_XT035S2	ILM_DT, ILM_ARCH_SW, BILLABLE_CHG_ID	Local Partitioned		
CI_BCHG_READ	Reference Partitioning	XT271P0	BILLABLE_CHG_ID, SP_ID, SEQNO	Global Partitioned		
CI_BCHG_SQ	Reference Partitioning	XT081P0	BILLABLE_CHG_ID, SEQ_NUM	Global Partitioned		
CI_B_CHG_LINE	Reference Partitioning	XT001P0	BILLABLE_CHG_ID, LINE_SEQ	Global Partitioned		
CI_B_LN_CHAR	Reference Partitioning	XT083P0	BILLABLE_CHG_ID, LINE_SEQ, CHAR_TYPE_CD	Global Partitioned		

**Case**

This table describes the Case maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
CI_CASE (Parent)	RANGE (ILM_DT, CASE_ID)				RANGE (CASE_ID)	MIN(LOG_DTT M) on CI_CASE_LOG table for given CASE_ID
		XT220P0	CASE_ID	Global Partitioned		
		XT220S1	PER_ID	Global		
		XT220S2	ACCT_ID	Global		
		XT220S3	PREM_ID	Global		
		XT220S4	USER_ID	Global		
		CM_ILM_ XT220S5	ILM_DT, ILM_ARCH_SW, CASE_ID	Local Partitioned		
CI_CASE_CHAR	Reference Partitioning	XT222P0	CASE_ID, CHAR_TYPE_ CD, SEQ_NUM	Global Partitioned		
		XT222S1	SRCH_CHAR_ VAL	Global		
CI_CASE_LOG	Reference Partitioning	XT221P0	CASE_ID, SEQ_NUM	Global Partitioned		
		XT221S1	CHAR_TYPE_ CD, CHAR_VAL_FK1	Global		
CI_CASE_LOG_ PARM	Reference Partitioning	XT290P0	CASE_ID, SEQ_NUM, PARM_SEQ	Global Partitioned		



**Field Activity**

This table describes the Field Activity maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
CI_FA (Parent)	RANGE (ILM_DT, FA_ID)				RANGE (FA_ID)	CI_FA.CRE_DTTM
		XT094P0	FA_ID	Global Partitioned		
		XT094S1	SP_ID, FO_ID	Global		
		XT094S2	FO_ID, FA_ID	Global		
		XT094S3	FA_STATUS_FLG, ELIG_DISPATCH_SW, FO_ID, FA_ID	Global		
		XT094S4	APP_SCHED_ID, FA_ID	Global		
		XT094S5	TEST_SEL_ID, FA_ID	Global		
		CM_ILM_XT094S6	ILM_DT, ILM_ARCH_SW, FA_ID	Local Partitioned		
		XT094S7	FA_EXT_ID, FA_ID	Global		
CI_FA_CHAR	Reference Partitioning	XT406P0	FA_ID, CHAR_TYPE_CD, SEQ_NUM	Global Partitioned		
		XT406S1	SRCH_CHAR_VAL	Global		
CI_FA_LOG	Reference Partitioning	XT350P0	FA_ID, SEQ_NUM	Global Partitioned		
CI_FA_REM	Reference Partitioning	XT407P0	FA_ID, FA_REM_CD	Global Partitioned		
CI_FA_REM_EXC	Reference Partitioning	XT312P0	FA_ID, FA_REM_CD	Global Partitioned		
CI_FA_REM_EXP	Reference Partitioning	XT405P0	FA_ID, FA_REM_CD, PARM_SEQ	Global Partitioned		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
CI_FA_STEP	Reference Partitioning	XT095P0	FA_ID, STEP_SEQ_NBR	Global Partitioned		
		XT095S1	CC_ID	Global		
		XT095S2	SPAWNED_FA_ID, FA_ID	Global		
		XT095S3	MR_ID	Global		

### Enrollment (Order)

This table describes the Enrollment (Order) maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
CI_ENRL (Parent)	RANGE (ILM_DT, ENRL_ID)				RANGE (ENRL_ID)	CI_ENRL, START_DT
		XT193P0	ENRL_ID	Global Partitioned		
		XT193S1	PER_ID	Global		
		XT193S2	ACCT_ID	Global		
		XT193S3	PREM_ID	Global		
		CM_ILM_XT193S4	ILM_DT, ILM_ARCH_SW, ENRL_ID	Local Partitioned		
CI_ENRL_ADDR	Reference Partitioning	XT200P0	ENRL_ID, ENRL_ADDR, ENT_FLG	Global Partitioned		
		XT200S1	ADDRESS1_UPR, ENRL_ID	Global		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
		XT200S2	CITY_UPR, ENRL_ID	Global		
CI_ENRL_FLD	Reference Partitioning	XT191P0	ENRL_ID, SEQ_NUM	Global Partitioned		
CI_ENRL_LOG	Reference Partitioning	XT198P0	ENRL_ID, SEQ_NUM	Global Partitioned		
CI_ENRL_PER_ID	Reference Partitioning	XT199P0	ENRL_ID, ID_TYPE_CD	Global Partitioned		
		XT199S1	HASH_PER_ID_NBR, ENRL_ID, ID_TYPE_CD	Global		
CI_ENRL_PER_NM	Reference Partitioning	XT194P0	ENRL_ID, SEQ_NUM	Global Partitioned		
		XT194S1	ENTITY_NAME_UPR, ENRL_ID	Global		
CI_ENRL_PER_PHN	Reference Partitioning	XT195P0	ENRL_ID, SEQ_NUM	Global Partitioned		
CI_ENRL_CON_TDET	Reference Partitioning	CI1011S1	CI_ENRL_CON TACT_ID	Global Partitioned		

### Payment Event

This table describes the Payment Event maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
CI_PAY_EVENT (Parent)	RANGE (ILM_DT, PAY_EVENT_ID)				RANGE (PAY_EVENT_ID)	CI_PAY_EVENT.PAY_DT
		XT159P0	PAY_EVENT_ID	Global Partitioned		
		XT159S1	PAY_DT, PAY_EVENT_ID	Global		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
		XT159S2	DOC_ID, PAY_EVENT_ID	Global		
		CM_ILM_XT159S3	ILM_DT, ILM_ARCH_SW, PAY_EVENT_ID	Local Partitioned		
CI_PAY_EVT_CHAR	Reference Partitioning	XT244P0	PAY_EVENT_ID, CHAR_TYPE_CD, SEQ_NUM	Global Partitioned		
		XT244S1	SRCH_CHAR_VAL	Global		
CI_PAY_EVT_EXCP	Reference Partitioning	XT161P0	PAY_EVENT_ID	Global Partitioned		
CI_PAY_TNDR	Reference Partitioning	XT265P0	PAY_TENDER_ID	Global		
		XT265S1	MICR_ID	Global		
		XT265S2	TENDER_AMT, PAY_TENDER_ID	Global		
		XT265S3	PAY_EVENT_ID	Global		
		XT265S4	PAYOR_ACCT_ID, TENDER_AMT	Global		
		XT265S5	TNDR_CTL_ID, PAY_EVENT_ID	Global		
		XT265S6	ADJ_ID	Global		
		XT265S7	HASH_MICR_ID, PAY_TENDER_ID	Global		
CI_APAY_CLR_STG	Reference Partitioning	XT003P0	APAY_CLR_ID	Global		
		XT003S1	BILL_ID	Global		
		XT003S2	PAY_TENDER_ID	Global		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
		XT003S3	BATCH_CD, BATCH_NBR, SCHED_EXTRA CT_DT	Global		
		XT003S4	ACCT_APAY_ID	Global		
CI_PAY_TNDR_CHAR	Reference Partitioning	XT413P0	PAY_TENDER_ID, CHAR_TYPE_CD, SEQ_NUM	Global		
		XT413S1	SRCH_CHAR_VAL	Global		
CI_PEVT_DST_DTL	Reference Partitioning	XT730P0	PAY_EVENT_ID, SEQ_NUM	Global Partitioned		
		XT730S1	SRCH_CHAR_VAL	Global		

### Payment

This table describes the Payment maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
CI_PAY (Parent)	RANGE (ILM_DT, PAY_ID)				RANGE (PAY_ID)	CI_PAY_EVENT. PAY_DT
		XT156P0	PAY_ID	Global Partitioned		
		XT156S1	ACCT_ID	Global		
		XT156S2	PAY_EVENT_ID	Global		
		XT156S3	PAY_AMT, PAY_ID	Global		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
		CM_ILM_ XT156S4	ILM_DT, ILM_ARCH_SW, PAY_ID	Local Partitioned		
CI_PAY_CHAR	Reference Partitioning	XT412P0	PAY_ID, CHAR_TYPE_ CD, SEQ_NUM	Global Partitioned		
		XT412S1	SRCH_CHAR_ VAL	Global		
CI_PAY_EXCP	Reference Partitioning	XT163P0	PAY_ID	Global Partitioned		
CI_PAY_SEG	Reference Partitioning	XT165P0	PAY_SEG_ID	Global		
		XT165S1	PAY_ID	Global		
		XT165S2	SA_ID	Global		

### Match Event

This table describes the Match Event maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
CI_MATCH_EVT (Parent)	RANGE (ILM_DT, MATCH_EVT_ ID)				RANGE (MATCH_EVT_ ID)	CI_MATCH_EVT .CREATE_DT
		XT266P0	MATCH_EVT_ ID	Global Partitioned		
		XT266S1	ACCT_ID, MEVT_STATUS_ FLG	Global		
		XT266S2	PAY_ID	Global		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
		CM_ILM_XT266S3	ILM_DT, ILM_ARCH_SW, MATCH_EVT_ID	Local Partitioned		

### Usage Request

This table describes the Usage Request maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
C1_USAGE (Parent)	RANGE (ILM_DT, USAGE_ID)				RANGE (USAGE_ID)	C1_USAGE.CRE_DTTM
		CT368S2	BSEG_ID	Global		
		CT368S3	USER_ID, USAGE_ID	Global		
	Reference Partitioning	XT368P0	USAGE_ID	Global Partitioned		
		XT368S1	BUS_OBJ_CD, BO_STATUS_CD, WIN_START_DT, BILL_CYC_CD, USAGE_ID	Global		
		CT368S2	BSEG_ID			
		CT368S3	USER_ID, USAGE_ID			
		XT368S4	SA_ID	Global		
		CT368S4	MASTER_USAG E_ID			
		CT368S5	SA_REL_ID			

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
		CM_ILM_XT368S5	ILM_DT, ILM_ARCH_SW, USAGE_ID	Local Partitioned		
C1_USAGE_CHAR	Reference Partitioning	XT387P0	USAGE_ID, CHAR_TYPE_CD, SEQ_NUM	Global Partitioned		
		XT387S1	SRCH_CHAR_VAL	Global		
C1_USAGE_LOG	Reference Partitioning	XT388P0	USAGE_ID, SEQNO	Global Partitioned		
		XT388S1	CHAR_TYPE_CD, CHAR_VAL_FK1	Global		
C1_USAGE_LOG_PARM	Reference Partitioning	XT389P0	USAGE_ID, SEQNO, PARM_SEQ	Global Partitioned		

### Business Flag

This table describes the Business Flag maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
F1_BUS_FLG (Parent)	RANGE (ILM_DT,BUS_FLG_ID)				RANGE(BUS_FLG_ID)	F1_BUS_FLG.CRE_DTTM
		F1T681P0	BUS_FLG_ID	Global Partitioned		
		F1T681S1	BUS_OBJ_CD, BO_STATUS_CD, BUS_FLG_ID	Global		
		CM_ILM_F1T681S2	ILM_DT, ILM_ARCH_SW, BUS_FLG_ID	Local Partitioned		



Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
F1_BUS_FLG_CHAR	Reference Partitioning	F1T684P0	BUS_FLG_ID, CHAR_TYPE_CD, SEQ_NUM	Global Partitioned		
		F1T684S0	SRCH_CHAR_VAL	Global		
F1_BUS_FLG_LOG	Reference Partitioning	F1T685P0	BUS_FLG_ID, SEQNO	Global Partitioned		
		F1T685S1	CHAR_TYPE_CD, CHAR_VAL_FK1	Global		
		F1T685S2	CHAR_TYPE_CD, CHAR_VAL	Global		
F1_BUS_FLG_LOG_PARM	Reference Partitioning	F1T686P0	BUS_FLG_ID, SEQNO, PARM_SEQ	Global Partitioned		
F1_BUS_FLG_REL	Reference Partitioning	F1T682P0	BUS_FLG_ID, BUS_FLG_REL_TYPE_FLG, SEQ_NUM	Global Partitioned		
F1_BUS_FLG_REL_OBJ	Reference Partitioning	F1T683P0	BUS_FLG_ID, BUS_FLG_REL_OBJ_TYPE_FLG, SEQ_NUM	Global Partitioned		

### Remote Message

This table describes the Remote Message maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
F1_REMOTE_MSG (Parent)	RANGE (ILM_DT,F1_REMOTE_MSG_ID)				RANGE(F1_REMOTE_MSG_ID)	F1_REMOTE_MSG.CRE_DTTM
		F1T735P0	F1_REMOTE_MSG_ID	Global Partitioned		
		F1T735S1	CRE_DTTM	Global		
		F1T735S2	F1_MDT_ID	Global		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
		F1T735S3	MAINT_OBJ_CD	Global		
		F1T735S4	PK_VALUE1	Global		
		F1T735S5	F1_DEVICE_MSG_ID	Global		
		F1T735S6	F1_MDT_ID, F1_MSG_CLASS_FLG, F1_DELIVERY_STATUS_FLG	Global		
		CM_ILM_ F1T735S7	ILM_DT, ILM_ARCH_SW, F1_REMOTE_MSG_ID	Local Partitioned		
F1_REMOTE_MSG_CHA	Reference Partitioning	F1T736P0	F1_REMOTE_MSG_ID, CHAR_TYPE_CD, SEQ_NUM	Global Partitioned		
		F1T736S1	SRCH_CHAR_VAL	Global		
F1_REMOTE_MSG_LOG	Reference Partitioning	F1T737P0	F1_REMOTE_MSG_ID, SEQNO	Global Partitioned		
		F1T737S1	CHAR_TYPE_CD, CHAR_VAL_FK1	Global		
		F1T737S2	CHAR_TYPE_CD, CHAR_VAL	Global		
F1_REMOTE_MSG_LOG_PARM	Reference Partitioning	F1T738P0	F1_REMOTE_MSG_ID, SEQNO, PARM_SEQ	Global Partitioned		

## Statistics Snapshot

This table describes the Statistics Snapshot maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
F1_STATS_SNPSHT(Parent)	RANGE (ILM_DT, SNAPSHOT_ID)				RANGE (SNAPSHOT_ID)	F1_STATS_SNPSHT. CRE_DTTM
		F1C706P0	SNAPSHOT_ID	Global Partitioned		
		F1C706S1	BUS_OBJ_CD, BO_STATUS_CD, SNAPSHOT_ID	Global		
		CM_ILM_ F1C706S2	ILM_DT, ILM_ARCH_SW, SNAPSHOT_ID	Local Partitioned		
F1_STATS_SNPSHT_CHAR	Reference Partitioning	F1C707P0	SNAPSHOT_ID, CHAR_TYPE_CD, SEQ_NUM	Global Partitioned		
		F1C707S1	SRCH_CHAR_VAL	Global		
F1_STATS_SNPSHT_LOG	Reference Partitioning	F1C708P0	SNAPSHOT_ID, SEQNO	Global Partitioned		
		F1C708S1	CHAR_TYPE_CD, CHAR_VAL_FK1	Global		
		F1C708S2	CHAR_TYPE_CD, CHAR_VAL	Global		
F1_STATS_SNPSHT_LOG_PARM	Reference Partitioning	F1C709P0	SNAPSHOT_ID, SEQNO, PARM_SEQ	Global Partitioned		
F1_STATS_SNPSHT_REL_OBJ	Reference Partitioning	F1C710P0	SNAPSHOT_ID, STATS_SNPSHT_REL_OBJ_TYPE_FLG, SEQ_NUM	Global Partitioned		

## Customer Relationship Request

This table describes the Customer Relationship Request maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
C1_CUST_REL_REQ	RANGE(ILM_DT, CUST_REL_REQ_ID)				RANGE(CUST_REL_REQ_ID)	C1_CUST_REL_REQ.CRE_DTTM
		C1T017P0	CUST_REL_REQ_ID	Global Partitioned		
		C1T017S1	CUST_REL_REQ_ID, BUS_OBJ_CD, BO_STATUS_CD	Global		
		CM_ILM_C1T017S2	ILM_DT, ILM_ARCH_SW, CUST_REL_REQ_ID	Local Partitioned		
C1_CUST_REL_REQ_CHAR	Reference Partitioning	C1T014P0	CUST_REL_REQ_ID, CHAR_TYPE_CD, SEQ_NUM	Global Partitioned		
		C1T014S1	SRCH_CHAR_VAL	Global		
C1_CUST_REL_REQ_LOG	Reference Partitioning	C1T015P0	CUST_REL_REQ_ID, SEQNO	Global Partitioned		
		C1T015S1	CHAR_TYPE_CD, CHAR_VAL_FK1	Global		
		C1T015S2	CHAR_TYPE_CD, CHAR_VAL	Global		
C1_CUST_REL_REQ_LOG_PARM	Reference Partitioning	C1T016P0	CUST_REL_REQ_ID, SEQNO, PARM_SEQ	Global Partitioned		
C1_CUST_REL_REQ_REL_OBJ	Reference Partitioning	C1T018P0	CUST_REL_REQ_ID, CRR_REL_OBJ_TY_FLG, SEQ_NUM	Global Partitioned		

## Customer Contact

This table describes the Customer Contact maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
CL_CC	RANGE(ILM_DT,CC_ID)				RANGE(CC_ID)	CL_CC, CC_DTTM, CL_CC, LETTER_PRINT_DTTM
		XT057P0	CC_ID	Global Partitioned		
		XT057S1	PER_ID	Global		
		XT057S2	BATCH_CD, BATCH_NBR, CC_ID, PRINT_LETTER_SW	Global		
		XT057S3	CC_TYPE_CD, CC_CL_CD, CC_ID	Global		
		XT057S4	ACCT_ID	Global		
		XT057S6	C1_CONTACT_ID	Global		
		CM_ILM_XT057S7	ILM_DT,ILM_ARCH_SW,CC_ID	Local Partitioned		
CL_CC_CHAR	Partitioning		CHAR_TYPE_CD	Partitioned	RANGE(CC_ID)	
		C1T007S1	SRCH_CHAR_VAL	Global		
CL_CC_LOG	Reference Partitioning	XT281P0	CC_LOG_ID	Global Partitioned	RANGE(CC_LOG_ID)	
		XT281S1	CC_ID	Global		

## Collection Process

This table describes the Collection Process maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
CI_COLL_PROC	RANGE(CRE_DTTM,COLL_PROC_ID)				RANGE (COLL_PROC_ID)	N/A

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
		XT073P0	COLL_PROC_ID	Global Partitioned		
		XT073S1	ACCT_ID	Global		
			COLL_STATUS_FLG			
CI_COLL_EVT	Reference Partitioning	XT069P0	COLL_PROC_ID, EVT_SEQ	Global Partitioned		
		XT069S0	TRIGGER_BP_SW, COLL_PROC_ID, EVT_SEQ, COLL_EVT_TYP_CD	Global		
CI_COLL_EVT_CC	Reference Partitioning	XT070P0	COLL_PROC_ID, EVT_SEQ, CC_ID	Global Partitioned		
		XT070S1	CC_ID	Global		
CI_COLL_PROC_SA	Reference Partitioning	XT074P0	COLL_PROC_ID, SA_ID	Global Partitioned		
		XT074S1	SA_ID	Global		

### Cut Process

This table describes the Cut Process maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
CI_CUT_PROC	RANGE(CRE_DTTM,CUT_PROC_ID)				RANGE (CUT_PROC_ID)	N/A
		XT324P0	CUT_PROC_ID	Global Partitioned		
		XT324S1	OD_PROC_ID, OD_EVT_SEQ	Global		
CI_CUT_EVT	Reference Partitioning	XT322P0	CUT_PROC_ID, EVT_SEQ	Global Partitioned		
CI_CUT_EVT_DEP	Reference Partitioning	XT323P0	CUT_PROC_ID, EVT_SEQ, SEQ_NUM	Global Partitioned		

## Overdue Process

This table describes the Overdue Process maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
CL_OD_PROC	RANGE(CRE_D TTM,OD_PROC_ID)				RANGE (OD_PROC_ID)	N/A
		XT315P0	OD_PROC_ID	Global Partitioned		
CL_OD_EVT	Reference Partitioning	XT318P0	OD_PROC_ID, EVT_SEQ	Global Partitioned		
CL_OD_EVT_DEP	Reference Partitioning	XT319P0	OD_PROC_ID, EVT_SEQ, SEQ_NUM	Global Partitioned		
CL_OD_PROC_LOG	Reference Partitioning	XT320P0	OD_PROC_ID, LOG_SEQ	Global Partitioned		
		XT320S1	CHAR_TYPE_CD, CHAR_VAL_FK1	Global		
CL_OD_PROC_LOGPARM	Reference Partitioning	XT321P0	OD_PROC_ID, LOG_SEQ, PARM_SEQ	Global Partitioned		
CL_OD_PROC_OBJ	Reference Partitioning	XT317P0	OD_PROC_ID, SEQ_NUM	Global Partitioned		

## Severance Event

This table describes the Severance Event maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
CL_SEV_PROC	RANGE(CRE_D TTM,SEV_PROC_ID)				RANGE (SEV_PROC_ID)	N/A
		XT118P0	SEV_PROC_ID	Global Partitioned		
		XT118S1	SA_ID, SEV_PROC_ID	Global		
		XT118S2	COLL_PROC_ID, EVT_SEQ	Global		
CL_SEV_EVT	Reference Partitioning	XT214P0	SEV_PROC_ID, EVT_SEQ	Global Partitioned		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
CI_SEV_EVT_DEP	Reference Partitioning	XT216P0	SEV_PROC_ID, EVT_SEQ, SEQ_NUM	Global Partitioned		
CI_SEV_EVT_FA	Reference Partitioning	XT217P0	SEV_PROC_ID, EVT_SEQ, FA_ID	Global Partitioned		
		XT217S1	FA_ID	Global		
CI_SEV_EVT_CC	Reference Partitioning	XT215P0	SEV_PROC_ID, EVT_SEQ, CC_ID	Global Partitioned		
		XT215S1	CC_ID	Global		

### WO Process

This table describes the WO Process maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
CI_WO_PROC	RANGE(CRE_DTTM,WO_PROC_ID)				RANGE (WO_PROC_ID)	N/A
		XT061P0	WO_PROC_ID	Global Partitioned		
		XT061S1	ACCT_ID, WO_STATUS_FLG	Global		
CI_WO_EVT	Reference Partitioning	XT059P0	WO_PROC_ID, EVT_SEQ	Global Partitioned		
CI_WO_EVT_CC	Reference Partitioning	XT060P0	WO_PROC_ID, EVT_SEQ, CC_ID	Global Partitioned		
		XT060S1	CC_ID	Global		
CI_WO_PROC_SA	Reference Partitioning	XT062P0	WO_PROC_ID, SA_ID	Global Partitioned		
		XT062S1	SA_ID, WO_SA_STAT_FLG	Global		



## General Audit

This table describes the General Audit maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
F1_GNRL_AUDIT	RANGE(ILM_DT, AUDIT_ID)				RANGE (AUDIT_ID)	F1_GNRL_AUDIT.CRE_DTTM
		F1T901P0	AUDIT_ID	Global Partitioned		
		F1T901S1	USER_ID	Global		
		F1T901S1	AUDIT_ID, USER_ID, CRE_DTTM	Global		
		CM_ILM_F1T901S3	ILM_DT, ILM_ARCH_SW, AUDIT_ID	Local Partitioned		
F1_GNRL_AUDIT_CHAR	Reference Partitioning	F1C504P0	AUDIT_ID, CHAR_TYPE_CD, SEQ_NUM	Global Partitioned		
		F1C504S1	SRCH_CHAR_VAL	Global		
F1_GNRL_AUDIT_VAL	Reference Partitioning	F1T902P0	AUDIT_ID, FLD_NAME	Global Partitioned		
		F1T902S1	AUDIT_ID, FLD_NAME, FLD_VAL	Global		

## Meter Read

This table describes the Meter Read maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
CI_MR	RANGE(ILM_DT, MR_ID)				RANGE(MR_ID)	CI_MR.READ_DTTM,
		XT132P0	MR_ID	Global Partitioned		
		XT132S1	MTR_CONFIG_ID, USE_ON_BILL_SW, READ_DTTM, MR_ID	Global		
		CM_ILM_XT132L0	ILM_DT, ILM_ARC_H_SW, MR_ID	Local Partitioned		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
CI_MR_CHAR	Reference Partitioning	XT410P0	MR_ID, CHAR_TYPE_CD, SEQ_NUM	Global Partitioned	RANGE(MR_ID)	
		XT410S1	SRCH_CHAR_VAL	Global		
CI_MR_REM	Reference Partitioning	XT135P0	MR_ID, READER_REM_CD	Global Partitioned	RANGE(MR_ID)	
CI_MR_REM_EX CP	Reference Partitioning	XT024P0	MR_ID, READER_REM_CD	Global Partitioned	RANGE(MR_ID)	
CI_REG_READ	Reference Partitioning	XT186P0	REG_READ_ID	Global Partitioned	RANGE(REG_READ_ID)	
		XT186S1	MR_ID	Global		
		XT186S2	REVIEW_HILO_SW, TRENDED_SW, REG_READ_ID	Global		
		XT186S3	REG_ID	Global		

### Payment Arrangement Process

This table describes the Payment Arrangement Process maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
C1_PA_RQST (Parent)	RANGE (ILM_DT, PA_RQST_ID)					C1_PA_RQST.CREATE_DTTM
		C1T020P0	PA_RQST_ID	Global Partitioned	RANGE (PA_RQST_ID)	
		C1T020S1	PA_RQST_ID, BUS_OBJ_CD, BO_STATUS_CD	Global		
		CM_ILM_C1T020S2	ILM_DT, ILM_ARC_H_SW, PA_RQST_ID	Local Partitioned		
C1_PA_RQST_CHAR	Reference Partitioning	C1T024P0	PA_RQST_ID, CHAR_TYPE_CD, SEQ_NUM	Global Partitioned		
		C1T024S1	SRCH_CHAR_VAL	Global		
C1_PA_RQST_ELIG_RSLT	Reference Partitioning	C1T022P0	PA_RQST_ID, PA_RQST_ELIG_CRIT_SEQ	Global Partitioned		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
C1_PA_RQST_LOG	Reference Partitioning	C1T025P0	PA_RQST_ID, SEQNO	Global Partitioned		
		C1T025S1	CHAR_TYPE_CD, CHAR_VAL_FK1	Global		
		C1T025S2	CHAR_TYPE_CD, CHAR_VAL	Global		
C1_PA_RQST_LOG_PARM	Reference Partitioning	C1T026P0	PA_RQST_ID, SEQNO, PARM_SEQ	Global Partitioned		
C1_PA_RQST_REL_OBJ	Reference Partitioning	C1T023P0	PA_RQST_ID, PA_RQST_REL_OBJ_TYPE_FLG, SEQ_NUM	Global Partitioned		

### Customer Service Request

This table describes the Customer Service Request maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
C1_CS_REQ (Parent)	RANGE (ILM_DT,CS_REQ_ID)					C1_CS_REQ.CRE_DTMM
		C1T043P0	CS_REQ_ID	Global Partitioned	RANGE (CS_REQ_ID)	
		C1T043S1	CS_REQ_ID, BUS_OBJ_CD, BO_STATUS_CD	Global		
		CM_ILM_C1T043S2	ILM_DT,ILM_ARC_H_SW,CS_REQ_ID	Local Partitioned		
	Reference Partitioning	C1T044P0	CS_REQ_ID, CHAR_TYPE_CD, SEQ_NUM	Global Partitioned		
		C1T044S1	SRCH_CHAR_VAL	Global		
	Reference Partitioning	C1T046P0	CS_REQ_ID, SEQNO	Global Partitioned		
		C1T046S1	CHAR_TYPE_CD, CHAR_VAL_FK1	Global		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
		C1T046S2	CHAR_TYPE_CD, CHAR_VAL	Global		
C1_CS_REQ_ LOG_PARM	Reference Partitioning	C1T047P0	CS_REQ_ID, SEQNO, PARM_SEQ	Global Partitioned		
C1_CS_REQ_ REL_OBJ	Reference Partitioning	C1T045P0	CS_REQ_ID, CS_REQ_REL_OBJ _TYPE_FLG, SEQ_NUM	Global Partitioned		

### Customer Service Request Account

This table describes the Customer Service Request Account maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
C1_CS_REQ_ ACCT (Parent)	RANGE (ILM_DT,CS_ REQ_ACCT_ID)					C1_CS_REQ_AC CT.CRE_DTTM
		C1T079P0	CS_REQ_ACCT_ID	Global Partitioned	RANGE (CS_REQ_ACCT_ ID)	
		C1T079S1	CS_REQ_ACCT_ID, BUS_OBJ_CD, BO_STATUS_CD	Global		
		CM_ILM_ C1T079S2	ILM_DT,ILM_ARC H_SW,CS_REQ_AC CT_ID	Local Partitioned		
C1_CS_REQ_ ACCT_ALERT	Reference Partitioning	C1T081P0	CS_REQ_ACCT_ID, CS_REQ_SEQ_ NUM	Global Partitioned		
C1_CS_REQ_ ACCT_APAY	Reference Partitioning	C1T082P0	CS_REQ_ACCT_ID, CS_REQ_SEQ_ NUM	Global Partitioned		
C1_CS_REQ_ ACCT_CHAR	Reference Partitioning	C1T083P0	CS_REQ_ACCT_ID, CS_REQ_SEQ_ NUM	Global Partitioned		
		C1T083S1	SRCH_CHAR_VAL	Global		
C1_CS_REQ_ ACCT_LOG	Reference Partitioning	C1T090P0	CS_REQ_ACCT_ID, SEQNO	Global Partitioned		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
		C1T090S1	CHAR_TYPE_CD, CHAR_VAL_FK1	Global		
		C1T090S2	CHAR_TYPE_CD, CHAR_VAL	Global		
C1_CS_REQ_AC CT_LOG_PARM	Reference Partitioning	C1T091P0	CS_REQ_ACCT_ID, SEQNO, PARAM_SEQ	Global Partitioned		
C1_CS_REQ_AC CT_MSG	Reference Partitioning	C1T084P0	CS_REQ_ACCT_ID, CS_REQ_SEQ_ NUM	Global Partitioned		
C1_CS_REQ_AC CT_MSG_PARM	Reference Partitioning	C1T085P0	CS_REQ_ACCT_ID, CS_REQ_SEQ_ NUM, CS_REQ_MSG_ PARAM_SEQ	Global Partitioned		
C1_CS_REQ_AC CT_NCD	Reference Partitioning	C1T089P0	CS_REQ_ACCT_ID, CS_REQ_SEQ_ NUM	Global Partitioned		
C1_CS_REQ_AC CT_PER	Reference Partitioning	C1T086P0	CS_REQ_ACCT_ PER_ID	Global Partitioned		
C1_CS_REQ_AC CT_PER_ADDR	Reference Partitioning	C1T088P0	CS_REQ_ACCT_ PER_ID	Global Partitioned		

### Customer Service Request Consumer Contract

This table describes the Customer Service Request Consumer Contract maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
C1_CS_REQ_ CONT (Parent)	RANGE (ILM_DT,CS_ REQ_CONT_ID)					C1_CS_REQ_CO NT.CRE_DTTM
		C1T055P0	CS_REQ_CONT_ ID	Global Partitioned	RANGE (CS_REQ_CONT_ _ID)	
		C1T055S1	CS_REQ_CONT_ ID, BUS_OBJ_CD, BO_STATUS_ CD	Global		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
		CM_ILM_C1T055S2	ILM_DT,ILM_ARCH_SW, CS_REQ_CONT_ID	Local Partitioned		
C1_CS_REQ_CONT_CHAR	Reference Partitioning	C1T058P0	CS_REQ_CONT_ID, CS_REQ_SEQ_NUM	Global Partitioned		
		C1T058S1	SRCH_CHAR_VAL	Global		
C1_CS_REQ_CONT_ID	Reference Partitioning	C1T057P0	CS_REQ_CONT_ID, CS_REQ_SEQ_NUM	Global		
C1_CS_REQ_LOG	Reference Partitioning	C1T062P0	CS_REQ_CONT_ID, SEQNO	Global Partitioned		
		C1T062S1	CHAR_TYPE_CD, CHAR_VAL_FK1	Global		
		C1T062S2	CHAR_TYPE_CD, CHAR_VAL	Global		
C1_CS_REQ_CO_NT_LOG_PARM	Reference Partitioning	C1T064P0	CS_REQ_CONT_ID, SEQNO, PARM_SEQ	Global Partitioned		
C1_CS_REQ_CO_NT_MS	Reference Partitioning	C1T059P0	CS_REQ_CONT_ID, CS_REQ_SEQ_NUM	Global Partitioned		
	Reference Partitioning	C1T061P0	CS_REQ_CONT_ID, CS_REQ_SEQ_NUM, SEQ_NUM	Global Partitioned		

### Customer Service Request Contract Product

This table describes the Customer Service Request Contract Product maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
C1_CS_REQ_CONT_PROD (Parent)	RANGE (ILM_DT,CS_REQ_CONT_PROD_ID)					C1_CS_REQ_CO_NT_PROD.CRE_DTTM
		C1T065P0	CS_REQ_CONT_PROD_ID	Global Partitioned	RANGE (CS_REQ_CONT_PROD_ID)	

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
		C1T065S1	CS_REQ_CONT_PROD_ID, BUS_OBJ_CD, BO_STATUS_CD	Global		
		CM_ILM_C1T065S2	ILM_DT,ILM_ARC H_SW,CS_REQ_CO NT_PROD_ID	Local Partitioned		
	Reference Partitioning	C1T067P0	CS_REQ_CONT_PROD_ID, CS_REQ_SEQ_NUM	Global Partitioned		
		C1T067S1	SRCH_CHAR_VAL	Global		
C1_CS_REQ_CO NT_PROD_LOG	Reference Partitioning	C1T068P0	CS_REQ_CONT_P ROD_ID, SEQNO	Global Partitioned		
		C1T068S1	CHAR_TYPE_CD, CHAR_VAL_FK1	Global		
		C1T068S2	CHAR_TYPE_CD, CHAR_VAL	Global		
C1_CS_REQ_CO NT_LOG_PARM	Reference Partitioning	C1T069P0	CS_REQ_CONT_P ROD_ID, SEQNO, PARM_SEQ	Global Partitioned		

### Customer Service Request Person

This table describes the Customer Service Request Person maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
C1_CS_REQ_ PER (Parent)	RANGE (ILM_DT,CS_RE Q_PER_ID)				RANGE (CS_REQ_PER_ ID)	C1_CS_REQ_ PER.CRE_DTTM
		C1T070P0	CS_REQ_PER_ID	Global Partitioned		
		C1T070S1	CS_REQ_PER_ID, BUS_OBJ_CD, BO_STATUS_CD	Global		
		CM_ILM_C1T070S2	ILM_DT,ILM_ARC H_SW,CS_REQ_ PER_ID	Local Partitioned		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
C1_CS_REQ_PER_ADDR_SEAS	Reference Partitioning	C1T074P0	CS_REQ_PER_ID, CS_REQ_SEQ_NUM	Global Partitioned		
C1_CS_REQ_PER_CHAR	Reference Partitioning	C1T075P0	CS_REQ_PER_ID, CS_REQ_SEQ_NUM	Global Partitioned		
		C1T075S1	SRCH_CHAR_VAL	Global		
C1_CS_REQ_PER_CONTDDET	Reference Partitioning	C1T073S1	CS_REQ_PER_ID, CS_REQ_SEQ_NUM	Global		
C1_CS_REQ_PER_ID	Reference Partitioning	C1T072S1	CS_REQ_PER_ID, CS_REQ_SEQ_NUM	Global		
C1_CS_REQ_PER_LOG	Reference Partitioning	C1T077P0	CS_REQ_PER_ID, SEQNO	Global Partitioned		
		C1T077S1	CHAR_TYPE_CD, CHAR_VAL_FK1	Global		
		C1T077S2	CHAR_TYPE_CD, CHAR_VAL	Global		
C1_CS_REQ_PER_LOG_PARM	Reference Partitioning	C1T078P0	CS_REQ_PER_ID, SEQNO, PARM_SEQ	Global Partitioned		
C1_CS_REQ_PER_NAME	Reference Partitioning	C1T071P0	CS_REQ_PER_ID, CS_REQ_SEQ_NUM	Global Partitioned		
C1_CS_REQ_PER_PER	Reference Partitioning	C1T076P0	CS_REQ_PER_ID, CS_REQ_SEQ_NUM	Global Partitioned		

### Customer Service Request Service Location

This table describes the Customer Service Request Service Location maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
C1_CS_REQ_SVC_LOC (Parent)	RANGE (ILM_DT,CS_REQ_SVC_LOC_ID)					C1_CS_REQ_SVC_LOC.CRE_DTTM



Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
		C1T049P0	CS_REQ_SVC_LOC_ID	Global Partitioned	RANGE (CS_REQ_SVC_LOC_ID)	
		C1T049S1	CS_REQ_SVC_LOC_ID, BUS_OBJ_CD, BO_STATUS_CD	Global		
		CM_ILM_C1T049S2	ILM_DT,ILM_ARC_H_SW,CS_REQ_SVC_LOC_ID	Local Partitioned		
C1_CS_REQ_SVC_LOC_CHAR	Reference Partitioning	C1T051P0	CS_REQ_SVC_LOC_ID, CHAR_TYPE_CD, SEQ_NUM	Global Partitioned		
		C1T051S1	SRCH_CHAR_VAL	Global		
C1_CS_REQ_SVC_LOC_CONT_P ROD	Reference Partitioning	C1T052P0	CS_REQ_SVC_LOC_ID, CS_REQ_SEQ_NUM	Global		
C1_CS_REQ_SVC_LOC_LOG	Reference Partitioning	C1T053P0	CS_REQ_SVC_LOC_ID, SEQNO	Global Partitioned		
		C1T053S1	CHAR_TYPE_CD, CHAR_VAL_FK1	Global		
		C1T053S2	CHAR_TYPE_CD, CHAR_VAL	Global		
C1_CS_REQ_SVC_LOC_LOG_PARM	Reference Partitioning	C1T054P0	CS_REQ_SVC_LOC_ID, SEQNO, PARM_SEQ	Global Partitioned		

### Customer Service Request Premise

This table describes the Customer Service Request Premise maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
C1_CS_REQ_PREM (Parent)	RANGE (ILM_DT,CS_REQ_PREM_ID)					C1_CS_REQ_PREM.CRE_DTTM
		C1T092P0	CS_REQ_PREM_ID	Global Partitioned	RANGE (CS_REQ_PREM_ID)	

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
		CM_ILM_ C1T092S1	ILM_DT, ILM_ARCH_SW, CS_REQ_PREM_ID	Local Partitioned		
C1_CS_REQ_PR EM_ALT_ADDR	Reference Partitioning	C1T095P0	CS_REQ_PREM_ID , CS_REQ_SEQ_ NUM	Global		
C1_CS_REQ_PR EM_CHAR	Reference Partitioning	C1T093P0	CS_REQ_PREM_ID , CS_REQ_SEQ_ NUM	Global Partitioned		
		C1T093S1	SRCH_CHAR_VAL	Global		
C1_CS_REQ_PR EM_GEO	Reference Partitioning	C1T094P0	CS_REQ_PREM_ID , CS_REQ_SEQ_ NUM	Global		
C1_CS_REQ_PR EM_LOG	Reference Partitioning	C1T096P0	CS_REQ_PREM_ID , SEQNO	Global Partitioned		
		C1T096S1	CHAR_TYPE_CD, CHAR_VAL_FK1	Global		
		C1T096S2	CHAR_TYPE_CD, CHAR_VAL	Global		
C1_CS_REQ_PR EM_LOG_PARM	Reference Partitioning	C1T097P0	CS_REQ_PREM_ID , SEQNO, PARM_SEQ	Global Partitioned		

### Market Charge

This table describes the Market Charge maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
C1_MKTMSG_C HG (Parent)	RANGE (ILM_DT,MKTM SG_CHG_ID)					C1_MKTMSG_C HG.MKT_CHG_ DT
		C1T135P0	MKTMSG_CHG_ID	Global Partitioned	RANGE (MKTMSG_CHG _ID)	
		C1T135S1	MKTMSG_CHG_ID , BUS_OBJ_CD, BO_STATUS_CD	Global		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
		CM_ILM_C1T135S2	ILM_DT,ILM_ARC H_SW,MKTMSG_ CHG_ID			
C1_MKTMSG_C HG_DTL	Reference Partitioning	C1T137P0	MKTMSG_CHG_ID ,MKT_SEQNO	Global Partitioned		
C1_MKTMSG_C HG_LOG	Reference Partitioning	C1T139P0	MKTMSG_CHG_ID ,SEQNO	Global Partitioned		
		C1T139S1	CHAR_TYPE_CD, CHAR_VAL_FK1	Global		
		C1T139S2	CHAR_TYPE_CD, CHAR_VAL	Global		
C1_MKTMSG_C HG_LOG_PARM	Reference Partitioning	C1T140P0	MKTMSG_CHG_ID ,SEQNO, PARM_SEQ	Global Partitioned		
C1_MKTMSG_C HG_REL_OBJ	Reference Partitioning	C1T138P0	MKTMSG_CHG_ID ,MKT_REL_OBJ_ TYPE_FLG, SEQNO	Global Partitioned		

### Market Payment

This table describes the Market Payment maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
C1_MKTMSG_P AY (Parent)	RANGE (ILM_DT,MKTM SG_PAY_ID)					C1_MKTMSG_ PAY.MKT_PAY_ DT
		C1T129P0	MKTMSG_PAY_ID	Global Partitioned	RANGE (MKTMSG_PAY_ ID)	
		C1T129S1	MKTMSG_PAY_ID, BUS_OBJ_CD, BO_STATUS_CD	Global		
		CM_ILM_ C1T129S2	ILM_DT,ILM_ARC H_SW,MKTMSG_P AY_ID	Local Partitioned		
C1_MKTMSG_P AY_DTL	Reference Partitioning	C1T131P0	MKTMSG_PAY_ID, MKT_SEQNO	Global Partitioned		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
C1_MKTMSG_P AY_LOG	Reference Partitioning	C1T133P0	MKTMSG_PAY_ID, SEQNO	Global Partitioned		
		C1T133S1	CHAR_TYPE_CD, CHAR_VAL_FK1	Global		
		C1T133S2	CHAR_TYPE_CD, CHAR_VAL	Global		
C1_MKTMSG_P AY_LOG_PARM	Reference Partitioning	C1T134P0	MKTMSG_PAY_ID, SEQNO, PARM_SEQ	Global Partitioned		
C1_MKTMSG_P AY_REL_OBJ	Reference Partitioning	C1T132P0	MKTMSG_PAY_ID, MKT_REL_OBJ_TY PE_FLG, SEQNO	Global Partitioned		

### Market Usage

This table describes the Market Usage maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
C1_MKTMSG_U SG (Parent)	RANGE (ILM_DT,MKTM SG_USG_ID)					C1_MKTMSG_ USG.MKT_USG_ DT
		C1T123P0	MKTMSG_USG_ID	Global Partitioned	RANGE (MKTMSG_PAY_ ID)	
		C1T123S1	MKTMSG_USG_ID, BUS_OBJ_CD, BO_STATUS_CD	Global		
		CM_ILM_C1T123 S2	ILM_DT,ILM_ARC H_SW,MKTMSG_U SG_ID	Local Partitioned		
C1_MKTMSG_ USG_DTL	Reference Partitioning	C1T125P0	MKTMSG_USG_ID, MKT_SEQNO	Global Partitioned		
C1_MKTMSG_ USG_LOG	Reference Partitioning	C1T127P0	MKTMSG_USG_ID, SEQNO	Global Partitioned		
		C1T127S1	CHAR_TYPE_CD, CHAR_VAL_FK1	Global		
		C1T127S2	CHAR_TYPE_CD, CHAR_VAL	Global		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
C1_MKTMSG_USG_LOG_PARM	Reference Partitioning	C1T128P0		Global Partitioned		
C1_MKTMSG_USG_REL_OBJ	Reference Partitioning	C1T126P0		Global Partitioned		

### Customer Service Request SA

This table describes the Customer Service Request SA maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
C1_CS_REQ_SA (Parent)	RANGE (ILM_DT, CS_REQ_SA_ID)					C1_CS_REQ_SA, CRE_DTTM
		C1T141P0	CS_REQ_SA_ID	Global Partitioned	RANGE(CS_REQ_SA_ID)	
		C1T141S1	CS_REQ_SA_ID, BUS_OBJ_CD, BO_STATUS_CD	Global		
		CM_ILM_C1T141S2	ILM_DT,ILM_ARC_H_SW,CS_REQ_SA_ID	Local Partitioned		
C1_CS_REQ_SA_CHAR	Reference Partitioning	C1T143P0	CS_REQ_SA_ID, CS_REQ_SEQ_NUM	Global Partitioned		
		C1T143S1	SRCH_CHAR_VAL	Global		
C1_CS_REQ_SA_LOG	Reference Partitioning	C1T156P0	CS_REQ_SA_ID, SEQNO	Global Partitioned		
		C1T156S1	CHAR_TYPE_CD, CHAR_VAL_FK1	Global		
		C1T156S2	CHAR_TYPE_CD, CHAR_VAL	Global		
C1_CS_REQ_SA_LOG_PARM	Reference Partitioning	C1T157P0	CS_REQ_SA_ID, SEQNO, PARM_SEQ	Global Partitioned		
C1_CS_REQ_SA_CONTERM	Reference Partitioning	C1T151P0	CS_REQ_SA_ID, CS_REQ_SEQ_NUM	Global Partitioned		

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
C1_CS_REQ_SA_CONT_QTY	Reference Partitioning	C1T149P0	CS_REQ_SA_ID, CS_REQ_SEQ_NUM	Global Partitioned		
C1_CS_REQ_SA_COP	Reference Partitioning	C1T153P0	CS_REQ_SA_ID, CS_REQ_SEQ_NUM	Global Partitioned		
C1_CS_REQ_SA_COP_OVRD	Reference Partitioning	C1T154P0	CS_REQ_SA_ID, CS_REQ_SEQ_NUM, SEQNUM	Global Partitioned		
C1_CS_REQ_SA_MSG	Reference Partitioning	C1T155P0	CS_REQ_SA_ID, CS_REQ_SEQ_NUM	Global Partitioned		
C1_CS_REQ_SA_RCHG	Reference Partitioning	C1T150P0	CS_REQ_SA_ID, CS_REQ_SEQ_NUM	Global Partitioned		
C1_CS_REQ_SA_RS	Reference Partitioning	C1T148P0	CS_REQ_SA_ID, CS_REQ_SEQ_NUM	Global Partitioned		
C1_CS_REQ_SA_TOU_CONT_VAL	Reference Partitioning	C1T152P0	CS_REQ_SA_ID, CS_REQ_SEQ_NUM, SEQ_NUM	Global Partitioned		
C1_CS_REQ_SA_SP	Reference Partitioning	C1T144P0	CS_REQ_SA_SP_ID, CS_REQ_SEQ_NUM	Global Partitioned	RANGE (CS_REQ_SA_SP_ID)	
C1_CS_REQ_SA_SP_CHAR	Reference Partitioning	C1T147P0	CS_REQ_SA_SP_ID, CS_REQ_SEQ_NUM	Global Partitioned		
C1_CS_REQ_SA_SP_FA	Reference Partitioning	C1T146P0	CS_REQ_SA_SP_ID, CS_REQ_SEQ_NUM	Global Partitioned		

### SA Arrears Snapshot

This table describes the SA Arrears Snapshot maintenance object.

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
C1_BL_SA_SNAPSHOT (Parent)	RANGE (ILM_DT, SA_ID)					C1_BL_SA_SNAPSHOT.C1_SNAPS_HOT_DTTM

Table Name	Table Partitioning Type (Partitioning, Sub-Partitioning Key)	Index Name	Index Columns	Index Type Global or Local	Index Partitioning Sub-Partitioning Key	ILM_DT Initial Load
		C1M020P0	SA_ID,C1_SNAPSHOT_DTTM , C1_SNAPSHOT_TYPE_FLG	Global Partitioned	RANGE (SA_ID)	
		C1M020S1	SA_ID	Global		
		C1M020S2	ACCT_ID	Global		
		C1M020S3	PER_ID	Global		
		C1M020S4	CURRENCY_CD	Global		
		CM_ILM_ C1M020S5	ILM_DT,ILM_ARCH_SW, SA_ID	Local Partitioned		

# Appendix A

---

## Sample SQL for Enabling ILM in CCB (Initial Install)

This section provides more detail about steps needed to fully support ILM on tables for maintenance objects that support the functionality. Two maintenance objects are shown:

- To Do Entry, which does not include a LOB field.
- Sync Request, which does include a LOB field.

Other maintenance object's implementations can follow the appropriate pattern based on whether there is a LOB field or not.

The following DDL(s):

- Follow Naming convention recommendations for partitions\subpartitions\tablespaces.
- Ensure all the ILM Storage requirements are incorporated, failing which, ILM functionality will not be achieved.
  - Partitions are defined with respective Tablespace.
  - Child Tables are referenced partitioned.
- Ensure all compression recommendations are incorporated.

### Maintenance Object: TO DO ENTRY

#### Parent Table: CI\_TD\_ENTRY

```
CREATE BIGFILE TABLESPACE CM_XT039_P2017JAN DATAFILE '+DATADG' SIZE
50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS
ADVANCED;
CREATE BIGFILE TABLESPACE CM_XT039_P2017FEB DATAFILE '+DATADG' SIZE
50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS
ADVANCED;
CREATE BIGFILE TABLESPACE CM_XT039_P2017MAR DATAFILE '+DATADG' SIZE
50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS
ADVANCED;
CREATE BIGFILE TABLESPACE CM_XT039_P2017APR DATAFILE '+DATADG' SIZE
50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS
ADVANCED;
```



```

CREATE BIGFILE TABLESPACE CM_XT039_P2017MAY DATAFILE '+DATADG' SIZE
50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS
ADVANCED;
CREATE BIGFILE TABLESPACE CM_XT039_P2017JUN DATAFILE '+DATADG' SIZE
50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS
ADVANCED;
CREATE BIGFILE TABLESPACE CM_XT039_P2017JUL DATAFILE '+DATADG' SIZE
50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS
ADVANCED;
CREATE BIGFILE TABLESPACE CM_XT039_P2017AUG DATAFILE '+DATADG' SIZE
50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS
ADVANCED;
CREATE BIGFILE TABLESPACE CM_XT039_P2017SEP DATAFILE '+DATADG' SIZE
50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS
ADVANCED;
CREATE BIGFILE TABLESPACE CM_XT039_P2017OCT DATAFILE '+DATADG' SIZE
50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS
ADVANCED;
CREATE BIGFILE TABLESPACE CM_XT039_P2017NOV DATAFILE '+DATADG' SIZE
50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS
ADVANCED;
CREATE BIGFILE TABLESPACE CM_XT039_P2017DEC DATAFILE '+DATADG' SIZE
50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS
ADVANCED;
CREATE BIGFILE TABLESPACE CM_XT039_PMAX DATAFILE '+DATADG' SIZE 50M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED;

```

```

CREATE TABLE CI_TD_ENTRY (
  TD_ENTRY_ID      CHAR(14) NOT NULL ENABLE,
  BATCH_CD        CHAR(8)  DEFAULT ' ' NOT NULL ENABLE,
  BATCH_NBR       NUMBER(10,0) DEFAULT 0 NOT NULL ENABLE,
  MESSAGE_CAT_NBR NUMBER(5,0) DEFAULT 0 NOT NULL ENABLE,
  MESSAGE_NBR     NUMBER(5,0) DEFAULT 0 NOT NULL ENABLE,
  ASSIGNED_TO     CHAR(8)  DEFAULT ' ' NOT NULL ENABLE,
  TD_TYPE_CD      CHAR(8)  DEFAULT ' ' NOT NULL ENABLE,
  ROLE_ID         CHAR(10) DEFAULT ' ' NOT NULL ENABLE,
  ENTRY_STATUS_FLG CHAR(2)  DEFAULT ' ' NOT NULL ENABLE,
  VERSION         NUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
  CRE_DTTM DATE,
  ASSIGNED_DTTM DATE,
  COMPLETE_DTTM DATE,
  COMPLETE_USER_ID CHAR(8)  DEFAULT ' ' NOT NULL ENABLE,
  COMMENTS        VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
  ASSIGNED_USER_ID CHAR(8)  DEFAULT ' ' NOT NULL ENABLE,
  TD_PRIORITY_FLG CHAR(4)  DEFAULT ' ' NOT NULL ENABLE,
  ILM_DT DATE,
  ILM_ARCH_SW CHAR(1)
)
ENABLE ROW MOVEMENT
PARTITION BY RANGE (ILM_DT)
SUBPARTITION BY RANGE (TD_ENTRY_ID) SUBPARTITION TEMPLATE
(
  SUBPARTITION S01 VALUES LESS THAN ( '12499999999999' ),
  SUBPARTITION S02 VALUES LESS THAN ( '24999999999999' ),
  SUBPARTITION S03 VALUES LESS THAN ( '37499999999999' ),
  SUBPARTITION S04 VALUES LESS THAN ( '49999999999999' ),
  SUBPARTITION S05 VALUES LESS THAN ( '62499999999999' ),
  SUBPARTITION S06 VALUES LESS THAN ( '74999999999999' ),
  SUBPARTITION S07 VALUES LESS THAN ( '87499999999999' ),
  SUBPARTITION SMAX VALUES LESS THAN ( MAXVALUE )
)
(

```

```

PARTITION "P2017JAN" VALUES LESS THAN (TO_DATE('2017-02-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT039_P2017JAN,
PARTITION "P2017FEB" VALUES LESS THAN (TO_DATE('2017-03-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT039_P2017FEB,
PARTITION "P2017MAR" VALUES LESS THAN (TO_DATE('2017-04-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT039_P2017MAR,
PARTITION "P2017APR" VALUES LESS THAN (TO_DATE('2017-05-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT039_P2017APR,
PARTITION "P2017MAY" VALUES LESS THAN (TO_DATE('2017-06-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT039_P2017MAY,
PARTITION "P2017JUN" VALUES LESS THAN (TO_DATE('2017-07-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT039_P2017JUN,
PARTITION "P2017JUL" VALUES LESS THAN (TO_DATE('2017-08-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT039_P2017JUL,
PARTITION "P2017AUG" VALUES LESS THAN (TO_DATE('2017-09-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT039_P2017AUG,
PARTITION "P2017SEP" VALUES LESS THAN (TO_DATE('2017-10-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT039_P2017SEP,
PARTITION "P2017OCT" VALUES LESS THAN (TO_DATE('2017-11-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT039_P2017OCT,
PARTITION "P2017NOV" VALUES LESS THAN (TO_DATE('2017-12-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT039_P2017NOV,
PARTITION "P2017DEC" VALUES LESS THAN (TO_DATE('2018-01-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT039_P2017DEC,
PARTITION "PMAX" VALUES LESS THAN (MAXVALUE)
tablespace CM_XT039_PMAX
);

```

## INDEX

```

CREATE BIGFILE TABLESPACE CM_XT039_IND DATAFILE '+DATADG' SIZE 50M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED;

CREATE UNIQUE INDEX XT039P0 ON CI_TD_ENTRY ( TD_ENTRY_ID ) TABLESPACE
CM_XT039_IND
GLOBAL PARTITION BY RANGE (TD_ENTRY_ID)
(
PARTITION P1 VALUES LESS THAN ( '12499999999999' ),
PARTITION P2 VALUES LESS THAN ( '24999999999999' ),
PARTITION P3 VALUES LESS THAN ( '37499999999999' ),
PARTITION P4 VALUES LESS THAN ( '49999999999999' ),
PARTITION P5 VALUES LESS THAN ( '62499999999999' ),
PARTITION P6 VALUES LESS THAN ( '74999999999999' ),
PARTITION P7 VALUES LESS THAN ( '87499999999999' ),
PARTITION P8 VALUES LESS THAN ( MAXVALUE )
);

ALTER TABLE CI_TD_ENTRY ADD CONSTRAINT XT039P0 PRIMARY
KEY(TD_ENTRY_ID) USING INDEX;

```

```

CREATE UNIQUE INDEX XT039S2 ON CI_TD_ENTRY ( ASSIGNED_TO, TD_ENTRY_ID
) TABLESPACE CM_XT039_IND COMPRESS ADVANCED LOW;

CREATE INDEX XT039S3 ON CI_TD_ENTRY ( ENTRY_STATUS_FLG, ASSIGNED_TO )
TABLESPACE CM_XT039_IND COMPRESS ADVANCED LOW;

CREATE INDEX XT039S4 ON CI_TD_ENTRY ( ROLE_ID, TD_TYPE_CD,
ENTRY_STATUS_FLG, TD_PRIORITY_FLG, ASSIGNED_TO, CRE_DTTM ) TABLESPACE
CM_XT039_IND COMPRESS ADVANCED LOW;

CREATE INDEX XT039S5 ON CI_TD_ENTRY ( BATCH_CD, BATCH_NBR,
ENTRY_STATUS_FLG ) TABLESPACE CM_XT039_IND COMPRESS ADVANCED LOW;

CREATE UNIQUE INDEX XT039S6 ON CI_TD_ENTRY ( TD_ENTRY_ID, ASSIGNED_TO,
ENTRY_STATUS_FLG ) TABLESPACE CM_XT039_IND COMPRESS ADVANCED LOW;

CREATE UNIQUE INDEX XT039S7 ON CI_TD_ENTRY ( COMPLETE_USER_ID,
COMPLETE_DTTM, TD_ENTRY_ID ) TABLESPACE CM_XT039_IND COMPRESS ADVANCED
LOW;

CREATE UNIQUE INDEX ILM_XT039S8 ON CI_TD_ENTRY ( ILM_DT, ILM_ARCH_SW,
TD_ENTRY_ID ) LOCAL COMPRESS ADVANCED LOW;

```

## Child Table: CI\_TD\_DRLKEY

```

CREATE TABLE CI_TD_DRLKEY
(
TD_ENTRY_ID CHAR(14) NOT NULL ENABLE,
SEQ_NUM      NUMBER(3,0) NOT NULL ENABLE,
KEY_VALUE    VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
VERSION      NUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
CONSTRAINT CI_TD_DRLKEY_FK FOREIGN KEY(TD_ENTRY_ID) REFERENCES
CI_TD_ENTRY ON DELETE CASCADE
)
PARTITION BY REFERENCE (CI_TD_DRLKEY_FK)
ENABLE ROW MOVEMENT;

```

## INDEX

```

CREATE UNIQUE INDEX XT037P0 ON CI_TD_DRLKEY ( TD_ENTRY_ID, SEQ_NUM )
TABLESPACE CM_XT039_IND
GLOBAL PARTITION BY RANGE (TD_ENTRY_ID)
(
PARTITION P1 VALUES LESS THAN ( '12499999999999' ),
PARTITION P2 VALUES LESS THAN ( '24999999999999' ),
PARTITION P3 VALUES LESS THAN ( '37499999999999' ),
PARTITION P4 VALUES LESS THAN ( '49999999999999' ),
PARTITION P5 VALUES LESS THAN ( '62499999999999' ),
PARTITION P6 VALUES LESS THAN ( '74999999999999' ),
PARTITION P7 VALUES LESS THAN ( '87499999999999' ),
PARTITION P8 VALUES LESS THAN ( MAXVALUE )
)
COMPRESS ADVANCED LOW;

ALTER TABLE CI_TD_DRLKEY ADD CONSTRAINT XT037P0 PRIMARY
KEY(TD_ENTRY_ID, SEQ_NUM) USING INDEX;

```

```
CREATE INDEX XT037S1 ON CI_TD_DRLKEY ( KEY_VALUE, TD_ENTRY_ID )
TABLESPACE CM_XT039_IND COMPRESS ADVANCED LOW;
```

## Child Table: CI\_TD\_ENTRY\_CHA

```
CREATE TABLE CI_TD_ENTRY_CHA
(
  TD_ENTRY_ID    CHAR(14) NOT NULL ENABLE,
  CHAR_TYPE_CD   CHAR(8)  NOT NULL ENABLE,
  SEQ_NUM        NUMBER(3,0) DEFAULT 0 NOT NULL ENABLE,
  CHAR_VAL       CHAR(16) DEFAULT ' ' NOT NULL ENABLE,
  VERSION        NUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
  ADHOC_CHAR_VAL VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
  CHAR_VAL_FK1   VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
  CHAR_VAL_FK2   VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
  CHAR_VAL_FK3   VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
  CHAR_VAL_FK4   VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
  CHAR_VAL_FK5   VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
  SRCH_CHAR_VAL  VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
  CONSTRAINT CI_TD_ENTRY_CHA_FK FOREIGN KEY(TD_ENTRY_ID) REFERENCES
  CI_TD_ENTRY ON DELETE CASCADE
)
PARTITION BY REFERENCE (CI_TD_ENTRY_CHA_FK)
ENABLE ROW MOVEMENT;
```

## INDEX

```
CREATE UNIQUE INDEX XT701P0 ON CI_TD_ENTRY_CHA ( TD_ENTRY_ID,
CHAR_TYPE_CD, SEQ_NUM ) TABLESPACE CM_XT039_IND
GLOBAL PARTITION BY RANGE (TD_ENTRY_ID)
(
  PARTITION P1 VALUES LESS THAN ( '12499999999999' ),
  PARTITION P2 VALUES LESS THAN ( '24999999999999' ),
  PARTITION P3 VALUES LESS THAN ( '37499999999999' ),
  PARTITION P4 VALUES LESS THAN ( '49999999999999' ),
  PARTITION P5 VALUES LESS THAN ( '62499999999999' ),
  PARTITION P6 VALUES LESS THAN ( '74999999999999' ),
  PARTITION P7 VALUES LESS THAN ( '87499999999999' ),
  PARTITION P8 VALUES LESS THAN ( MAXVALUE )
)
COMPRESS ADVANCED LOW;
```

```
ALTER TABLE CI_TD_ENTRY_CHA ADD CONSTRAINT XT701P0 PRIMARY
KEY(TD_ENTRY_ID, CHAR_TYPE_CD, SEQ_NUM) USING INDEX;
```

```
CREATE INDEX XT701S1 ON CI_TD_ENTRY_CHA ( SRCH_CHAR_VAL, CHAR_TYPE_CD,
TD_ENTRY_ID ) TABLESPACE CM_XT039_IND COMPRESS ADVANCED LOW;
```

## Child Table: CI\_TD\_LOG

```
CREATE TABLE CI_TD_LOG
(
  TD_ENTRY_ID CHAR(14) NOT NULL ENABLE,
  SEQ_NUM      NUMBER(3,0) NOT NULL ENABLE,
  LOG_DTTM    DATE NOT NULL ENABLE,
  LOG_TYPE_FLG CHAR(4) DEFAULT ' ' NOT NULL ENABLE,
```

```

USER_ID      CHAR(8) DEFAULT ' ' NOT NULL ENABLE,
ASSIGNED_TO CHAR(8) DEFAULT ' ' NOT NULL ENABLE,
VERSION      NUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
DESCRLONG    VARCHAR2(4000) DEFAULT ' ' NOT NULL ENABLE,
CONSTRAINT CI_TD_LOG_FK FOREIGN KEY(TD_ENTRY_ID) REFERENCES
CI_TD_ENTRY ON DELETE CASCADE
)
PARTITION BY REFERENCE (CI_TD_LOG_FK)
ENABLE ROW MOVEMENT;

```

## INDEX

```

CREATE UNIQUE INDEX XT721P0 ON CI_TD_LOG ( TD_ENTRY_ID, SEQ_NUM )
TABLESPACE CM_XT039_IND
GLOBAL PARTITION BY RANGE (TD_ENTRY_ID)
(
PARTITION P1 VALUES LESS THAN ( '12499999999999' ),
PARTITION P2 VALUES LESS THAN ( '24999999999999' ),
PARTITION P3 VALUES LESS THAN ( '37499999999999' ),
PARTITION P4 VALUES LESS THAN ( '49999999999999' ),
PARTITION P5 VALUES LESS THAN ( '62499999999999' ),
PARTITION P6 VALUES LESS THAN ( '74999999999999' ),
PARTITION P7 VALUES LESS THAN ( '87499999999999' ),
PARTITION P8 VALUES LESS THAN ( MAXVALUE )
)
COMPRESS ADVANCED LOW;

ALTER TABLE CI_TD_LOG ADD CONSTRAINT XT721P0 PRIMARY KEY(TD_ENTRY_ID,
SEQ_NUM) USING INDEX;

CREATE INDEX XT721S1 ON CI_TD_LOG ( LOG_DTTM, USER_ID, LOG_TYPE_FLG,
TD_ENTRY_ID ) TABLESPACE CM_XT039_IND COMPRESS ADVANCED LOW;

```

## Child Table: CI\_TD\_MSG\_PARM

```

CREATE TABLE CI_TD_MSG_PARM
(
TD_ENTRY_ID CHAR(14) NOT NULL ENABLE,
SEQ_NUM      NUMBER(3,0) NOT NULL ENABLE,
MSG_PARM_VAL VARCHAR2(30) DEFAULT ' ' NOT NULL ENABLE,
VERSION      NUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
CONSTRAINT CI_TD_MSG_PARM_FK FOREIGN KEY(TD_ENTRY_ID) REFERENCES
CI_TD_ENTRY ON DELETE CASCADE
)
PARTITION BY REFERENCE (CI_TD_MSG_PARM_FK)
ENABLE ROW MOVEMENT;

```

## INDEX

```

CREATE UNIQUE INDEX XT040P0 ON CI_TD_MSG_PARM ( TD_ENTRY_ID, SEQ_NUM )
TABLESPACE CM_XT039_IND
GLOBAL PARTITION BY RANGE (TD_ENTRY_ID)
(
PARTITION P1 VALUES LESS THAN ( '12499999999999' ),
PARTITION P2 VALUES LESS THAN ( '24999999999999' ),
PARTITION P3 VALUES LESS THAN ( '37499999999999' ),
PARTITION P4 VALUES LESS THAN ( '49999999999999' ),
PARTITION P5 VALUES LESS THAN ( '62499999999999' ),

```

```

PARTITION P6 VALUES LESS THAN ( '74999999999999' ),
PARTITION P7 VALUES LESS THAN ( '87499999999999' ),
PARTITION P8 VALUES LESS THAN ( MAXVALUE )
)
COMPRESS ADVANCED LOW;

ALTER TABLE CI_TD_MSG_PARM ADD CONSTRAINT XT040P0 PRIMARY
KEY(TD_ENTRY_ID, SEQ_NUM) USING INDEX;

```

## Child Table: CI\_TD\_SRTKEY

```

CREATE TABLE CI_TD_SRTKEY
(
TD_ENTRY_ID CHAR(14) NOT NULL ENABLE,
SEQ_NUM      NUMBER(3,0) NOT NULL ENABLE,
KEY_VALUE    VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
VERSION      NUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
CONSTRAINT CI_TD_SRTKEY_FK FOREIGN KEY(TD_ENTRY_ID) REFERENCES
CI_TD_ENTRY ON DELETE CASCADE
)
PARTITION BY REFERENCE (CI_TD_SRTKEY_FK)
ENABLE ROW MOVEMENT;

```

## INDEX

```

CREATE UNIQUE INDEX XT041P0 ON CI_TD_SRTKEY ( TD_ENTRY_ID, SEQ_NUM )
TABLESPACE CM_XT039_IND
GLOBAL PARTITION BY RANGE (TD_ENTRY_ID)
(
PARTITION P1 VALUES LESS THAN ( '12499999999999' ),
PARTITION P2 VALUES LESS THAN ( '24999999999999' ),
PARTITION P3 VALUES LESS THAN ( '37499999999999' ),
PARTITION P4 VALUES LESS THAN ( '49999999999999' ),
PARTITION P5 VALUES LESS THAN ( '62499999999999' ),
PARTITION P6 VALUES LESS THAN ( '74999999999999' ),
PARTITION P7 VALUES LESS THAN ( '87499999999999' ),
PARTITION P8 VALUES LESS THAN ( MAXVALUE )
)
COMPRESS ADVANCED LOW;

ALTER TABLE CI_TD_SRTKEY ADD CONSTRAINT XT041P0 PRIMARY
KEY(TD_ENTRY_ID, SEQ_NUM) USING INDEX;

CREATE INDEX XT041S1 ON CI_TD_SRTKEY ( KEY_VALUE, TD_ENTRY_ID )
TABLESPACE CM_XT039_IND COMPRESS ADVANCED LOW;

```

## Maintenance Object:F1-SYNCREQIN

### Parent Table: F1\_SYNC\_REQ\_IN

```

CREATE BIGFILE TABLESPACE CM_F1T191_P2017JAN DATAFILE '+DATADG' SIZE
50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS
ADVANCED;

```

```

CREATE BIGFILE TABLESPACE CM_F1T191_P2017FEB DATAFILE '+DATADG' SIZE
50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS
ADVANCED;
CREATE BIGFILE TABLESPACE CM_F1T191_P2017MAR DATAFILE '+DATADG' SIZE
50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS
ADVANCED;
CREATE BIGFILE TABLESPACE CM_F1T191_P2017APR DATAFILE '+DATADG' SIZE
50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS
ADVANCED;
CREATE BIGFILE TABLESPACE CM_F1T191_P2017MAY DATAFILE '+DATADG' SIZE
50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS
ADVANCED;
CREATE BIGFILE TABLESPACE CM_F1T191_P2017JUN DATAFILE '+DATADG' SIZE
50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS
ADVANCED;
CREATE BIGFILE TABLESPACE CM_F1T191_P2017JUL DATAFILE '+DATADG' SIZE
50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS
ADVANCED;
CREATE BIGFILE TABLESPACE CM_F1T191_P2017AUG DATAFILE '+DATADG' SIZE
50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS
ADVANCED;
CREATE BIGFILE TABLESPACE CM_F1T191_P2017SEP DATAFILE '+DATADG' SIZE
50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS
ADVANCED;
CREATE BIGFILE TABLESPACE CM_F1T191_P2017OCT DATAFILE '+DATADG' SIZE
50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS
ADVANCED;
CREATE BIGFILE TABLESPACE CM_F1T191_P2017NOV DATAFILE '+DATADG' SIZE
50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS
ADVANCED;
CREATE BIGFILE TABLESPACE CM_F1T191_P2017DEC DATAFILE '+DATADG' SIZE
50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS
ADVANCED;
CREATE BIGFILE TABLESPACE CM_F1T191_PMAX DATAFILE '+DATADG' SIZE 50M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED;

CREATE TABLE F1_SYNC_REQ_IN
(
    F1_SYNC_REQ_IN_ID CHAR(14) NOT NULL ENABLE,
    BUS_OBJ_CD        CHAR(30) DEFAULT ' ' NOT NULL ENABLE,
    CRE_DTTM DATE NOT NULL ENABLE,
    BO_STATUS_CD CHAR(12) DEFAULT ' ' NOT NULL ENABLE,
    STATUS_UPD_DTTM DATE,
    MAINT_OBJ_CD CHAR(12) DEFAULT ' ' NOT NULL ENABLE,
    NT_XID_CD CHAR(30) DEFAULT ' ' NOT NULL ENABLE,
    EXT_PK_VALUE1 VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
    EXT_PK_VALUE2 VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
    EXT_PK_VALUE3 VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
    EXT_PK_VALUE4 VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
    EXT_PK_VALUE5 VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
    PK_VALUE1 VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
    BO_DATA_AREA CLOB,
    PRE_TRN_INIT_BO_DATA_AREA CLOB,
    PRE_TRN_FIN_BO_DATA_AREA CLOB,
    POST_TRN_BO_DATA_AREA CLOB,
    VERSION NUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
    EXT_REFERENCE_ID CHAR(36) DEFAULT ' ' NOT NULL ENABLE,
    F1_INITIAL_LOAD_SYNC_FLG CHAR(4) DEFAULT ' ' NOT NULL ENABLE,
    F1_COMPOSITE_SYNC_FLG CHAR(4) DEFAULT ' ' NOT NULL ENABLE,
    ILM_DT DATE,
    ILM_ARCH_SW CHAR(1)
)

```

```

ENABLE ROW MOVEMENT
LOB (BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN ROW
COMPRESS MEDIUM CACHE)
LOB (PRE_TRN_INIT_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE
IN ROW COMPRESS MEDIUM CACHE)
LOB (PRE_TRN_FIN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE
IN ROW COMPRESS MEDIUM CACHE)
LOB (POST_TRN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE)
PARTITION BY RANGE (ILM_DT)
SUBPARTITION BY RANGE (F1_SYNC_REQ_IN_ID)
SUBPARTITION TEMPLATE
(
    SUBPARTITION S01 VALUES LESS THAN ( '12499999999999' ),
    SUBPARTITION S02 VALUES LESS THAN ( '24999999999999' ),
    SUBPARTITION S03 VALUES LESS THAN ( '37499999999999' ),
    SUBPARTITION S04 VALUES LESS THAN ( '49999999999999' ),
    SUBPARTITION S05 VALUES LESS THAN ( '62499999999999' ),
    SUBPARTITION S06 VALUES LESS THAN ( '74999999999999' ),
    SUBPARTITION S07 VALUES LESS THAN ( '87499999999999' ),
    SUBPARTITION SMAX VALUES LESS THAN ( MAXVALUE )
)
(
PARTITION "P2017JAN" VALUES LESS THAN (TO_DATE('2017-02-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
LOB(BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN ROW COMPRESS
MEDIUM CACHE tablespace CM_F1T191_P2017JAN )
LOB(PRE_TRN_INIT_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017JAN )
LOB(PRE_TRN_FIN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017JAN )
LOB(POST_TRN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN ROW
COMPRESS MEDIUM CACHE
tablespace CM_F1T191_P2017JAN )
tablespace CM_F1T191_P2017JAN,
PARTITION "P2017FEB" VALUES LESS THAN (TO_DATE('2017-03-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
LOB(BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN ROW COMPRESS
MEDIUM CACHE tablespace CM_F1T191_P2017FEB )
LOB(PRE_TRN_INIT_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017FEB )
LOB(PRE_TRN_FIN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017FEB )
LOB(POST_TRN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN ROW
COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017FEB )
tablespace CM_F1T191_P2017FEB,
PARTITION "P2017MAR" VALUES LESS THAN (TO_DATE('2017-04-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
LOB(BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN ROW COMPRESS
MEDIUM CACHE tablespace CM_F1T191_P2017MAR )
LOB(PRE_TRN_INIT_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017MAR )
LOB(PRE_TRN_FIN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017MAR )
LOB(POST_TRN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN ROW
COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017MAR )
tablespace CM_F1T191_P2017MAR,
PARTITION "P2017APR" VALUES LESS THAN (TO_DATE('2017-05-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
LOB(BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN ROW COMPRESS
MEDIUM CACHE tablespace CM_F1T191_P2017APR )

```



```

LOB(PRE_TRN_INIT_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017APR )
LOB(PRE_TRN_FIN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017APR )
LOB(POST_TRN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN ROW
COMPRESS MEDIUM CACHE
tablespace CM_F1T191_P2017APR )
tablespace CM_F1T191_P2017APR,
PARTITION "P2017MAY" VALUES LESS THAN (TO_DATE('2017-06-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
LOB(BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN ROW COMPRESS
MEDIUM CACHE tablespace CM_F1T191_P2017MAY )
LOB(PRE_TRN_INIT_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017MAY )
LOB(PRE_TRN_FIN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017MAY )
LOB(POST_TRN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN ROW
COMPRESS MEDIUM CACHE
tablespace CM_F1T191_P2017MAY )
tablespace CM_F1T191_P2017MAY,
PARTITION "P2017JUN" VALUES LESS THAN (TO_DATE('2017-07-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
LOB(BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN ROW COMPRESS
MEDIUM CACHE tablespace CM_F1T191_P2017JUN )
LOB(PRE_TRN_INIT_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017JUN )
LOB(PRE_TRN_FIN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017JUN )
LOB(POST_TRN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN ROW
COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017JUN )
tablespace CM_F1T191_P2017JUN,
PARTITION "P2017JUL" VALUES LESS THAN (TO_DATE('2017-08-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
LOB(BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN ROW COMPRESS
MEDIUM CACHE tablespace CM_F1T191_P2017JUL )
LOB(PRE_TRN_INIT_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017JUL )
LOB(PRE_TRN_FIN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017JUL )
LOB(POST_TRN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN ROW
COMPRESS MEDIUM CACHE
tablespace CM_F1T191_P2017JUL )
tablespace CM_F1T191_P2017JUL,
PARTITION "P2017AUG" VALUES LESS THAN (TO_DATE('2017-09-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
LOB(BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN ROW COMPRESS
MEDIUM CACHE tablespace CM_F1T191_P2017AUG )
LOB(PRE_TRN_INIT_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017AUG )
LOB(PRE_TRN_FIN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017AUG )
LOB(POST_TRN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN ROW
COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017AUG )
tablespace CM_F1T191_P2017AUG,
PARTITION "P2017SEP" VALUES LESS THAN (TO_DATE('2017-10-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
LOB(BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN ROW COMPRESS
MEDIUM CACHE tablespace CM_F1T191_P2017SEP )
LOB(PRE_TRN_INIT_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017SEP )
LOB(PRE_TRN_FIN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017SEP )

```

```

LOB(POST_TRN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN ROW
COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017SEP )
tablespace CM_F1T191_P2017SEP,
PARTITION "P2017OCT" VALUES LESS THAN (TO_DATE('2017-11-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
LOB(BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN ROW COMPRESS
MEDIUM CACHE tablespace CM_F1T191_P2017OCT )
LOB(PRE_TRN_INIT_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017OCT )
LOB(PRE_TRN_FIN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017OCT )
LOB(POST_TRN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN ROW
COMPRESS MEDIUM CACHE
tablespace CM_F1T191_P2017OCT )
tablespace CM_F1T191_P2017OCT,
PARTITION "P2017NOV" VALUES LESS THAN (TO_DATE('2017-12-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
LOB(BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN ROW COMPRESS
MEDIUM CACHE tablespace CM_F1T191_P2017NOV )
LOB(PRE_TRN_INIT_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017NOV )
LOB(PRE_TRN_FIN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017NOV )
LOB(POST_TRN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN ROW
COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017NOV )
tablespace CM_F1T191_P2017NOV,
PARTITION "P2017DEC" VALUES LESS THAN (TO_DATE('2018-01-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
LOB(BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN ROW COMPRESS
MEDIUM CACHE tablespace CM_F1T191_P2017DEC )
LOB(PRE_TRN_INIT_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017DEC )
LOB(PRE_TRN_FIN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017DEC )
LOB(POST_TRN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN ROW
COMPRESS MEDIUM CACHE tablespace CM_F1T191_P2017DEC )
tablespace CM_F1T191_P2017DEC,
PARTITION "PMAX" VALUES LESS THAN (MAXVALUE)
LOB(BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN ROW COMPRESS
MEDIUM CACHE tablespace CM_F1T191_PMAX )
LOB(PRE_TRN_INIT_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE tablespace CM_F1T191_PMAX )
LOB(PRE_TRN_FIN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE tablespace CM_F1T191_PMAX )
LOB(POST_TRN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN ROW
COMPRESS MEDIUM CACHE
tablespace CM_F1T191_PMAX )
tablespace CM_F1T191_PMAX
);

```

## INDEX

```

CREATE BIGFILE TABLESPACE CM_F1T191_IND DATAFILE '+DATADG' SIZE 50M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED;

CREATE UNIQUE INDEX F1T191P0 ON F1_SYNC_REQ_IN(F1_SYNC_REQ_IN_ID)
TABLESPACE CM_F1T191_IND
GLOBAL PARTITION BY RANGE (F1_SYNC_REQ_IN_ID)
(
PARTITION P1 VALUES LESS THAN ( '12499999999999' ),
PARTITION P2 VALUES LESS THAN ( '24999999999999' ),

```

```

PARTITION P3 VALUES LESS THAN ( '37499999999999' ),
PARTITION P4 VALUES LESS THAN ( '49999999999999' ),
PARTITION P5 VALUES LESS THAN ( '62499999999999' ),
PARTITION P6 VALUES LESS THAN ( '74999999999999' ),
PARTITION P7 VALUES LESS THAN ( '87499999999999' ),
PARTITION P8 VALUES LESS THAN ( MAXVALUE )
);

ALTER TABLE F1_SYNC_REQ_IN ADD CONSTRAINT F1T191P0 PRIMARY KEY
(F1_SYNC_REQ_IN_ID) USING INDEX;

CREATE UNIQUE INDEX F1T191S1 ON F1_SYNC_REQ_IN (BO_STATUS_CD,
BUS_OBJ_CD, F1_SYNC_REQ_IN_ID) TABLESPACE CM_F1T191_IND COMPRESS
ADVANCED LOW;

CREATE INDEX F1T191S2 ON
F1_SYNC_REQ_IN(MAINT_OBJ_CD,EXT_PK_VALUE1,NT_XID_CD,PK_VALUE1)
TABLESPACE CM_F1T191_IND COMPRESS ADVANCED LOW;

CREATE UNIQUE INDEX CM_ILM_F1T191S3 ON F1_SYNC_REQ_IN(ILM_DT,
ILM_ARCH_SW, F1_SYNC_REQ_IN_ID) LOCAL COMPRESS ADVANCED LOW;

```

## Child Table: F1\_SYNC\_REQ\_IN\_CHAR

```

CREATE TABLE F1_SYNC_REQ_IN_CHAR
(
    F1_SYNC_REQ_IN_ID CHAR(14) NOT NULL ENABLE,
    CHAR_TYPE_CD      CHAR(8) NOT NULL ENABLE,
    SEQ_NUM           NUMBER(3,0) NOT NULL ENABLE,
    CHAR_VAL          CHAR(16) DEFAULT ' ' NOT NULL ENABLE,
    ADHOC_CHAR_VAL    VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
    CHAR_VAL_FK1      VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
    CHAR_VAL_FK2      VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
    CHAR_VAL_FK3      VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
    CHAR_VAL_FK4      VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
    CHAR_VAL_FK5      VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
    SRCH_CHAR_VAL     VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
    VERSION           NUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
    CONSTRAINT F1_SYNC_REQ_IN_CHAR_FK FOREIGN KEY(F1_SYNC_REQ_IN_ID)
REFERENCES F1_SYNC_REQ_IN ON DELETE CASCADE
)
PARTITION BY REFERENCE (F1_SYNC_REQ_IN_CHAR_FK)
ENABLE ROW MOVEMENT;

```

## INDEX

```

CREATE UNIQUE INDEX F1T193P0 ON F1_SYNC_REQ_IN_CHAR(F1_SYNC_REQ_IN_ID,
CHAR_TYPE_CD, SEQ_NUM) TABLESPACE CM_F1T191_IND
GLOBAL PARTITION BY RANGE (F1_SYNC_REQ_IN_ID)
(
PARTITION P1 VALUES LESS THAN ( '12499999999999' ),
PARTITION P2 VALUES LESS THAN ( '24999999999999' ),
PARTITION P3 VALUES LESS THAN ( '37499999999999' ),
PARTITION P4 VALUES LESS THAN ( '49999999999999' ),
PARTITION P5 VALUES LESS THAN ( '62499999999999' ),
PARTITION P6 VALUES LESS THAN ( '74999999999999' ),
PARTITION P7 VALUES LESS THAN ( '87499999999999' ),
PARTITION P8 VALUES LESS THAN ( MAXVALUE )
)

```

```

COMPRESS ADVANCED LOW;

ALTER TABLE F1_SYNC_REQ_IN_CHAR ADD CONSTRAINT F1T193P0 PRIMARY KEY
(F1_SYNC_REQ_IN_ID, CHAR_TYPE_CD, SEQ_NUM) USING INDEX;

CREATE INDEX F1T193S1 ON F1_SYNC_REQ_IN_CHAR(SRCH_CHAR_VAL) TABLESPACE
CM_F1T191_IND ;

```

## Child Table: F1\_SYNC\_REQ\_IN\_EXCP

```

CREATE TABLE F1_SYNC_REQ_IN_EXCP
(
  F1_SYNC_REQ_IN_ID CHAR(14) NOT NULL ENABLE,
  SEQNO              NUMBER(5,0) NOT NULL ENABLE,
  MESSAGE_CAT_NBR   NUMBER(5,0) DEFAULT 0 NOT NULL ENABLE,
  MESSAGE_NBR       NUMBER(5,0) DEFAULT 0 NOT NULL ENABLE,
  VERSION           NUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
  CONSTRAINT F1_SYNC_REQ_IN_EXCP_FK FOREIGN KEY(F1_SYNC_REQ_IN_ID)
REFERENCES F1_SYNC_REQ_IN ON DELETE CASCADE
)
PARTITION BY REFERENCE (F1_SYNC_REQ_IN_EXCP_FK)
ENABLE ROW MOVEMENT;

```

## INDEX

```

CREATE UNIQUE INDEX F1T197P0 ON
F1_SYNC_REQ_IN_EXCP(F1_SYNC_REQ_IN_ID,SEQNO) TABLESPACE CM_F1T191_IND
GLOBAL PARTITION BY RANGE (F1_SYNC_REQ_IN_ID)
(
  PARTITION P1 VALUES LESS THAN ( '12499999999999' ),
  PARTITION P2 VALUES LESS THAN ( '24999999999999' ),
  PARTITION P3 VALUES LESS THAN ( '37499999999999' ),
  PARTITION P4 VALUES LESS THAN ( '49999999999999' ),
  PARTITION P5 VALUES LESS THAN ( '62499999999999' ),
  PARTITION P6 VALUES LESS THAN ( '74999999999999' ),
  PARTITION P7 VALUES LESS THAN ( '87499999999999' ),
  PARTITION P8 VALUES LESS THAN ( MAXVALUE )
)
COMPRESS ADVANCED LOW;

ALTER TABLE F1_SYNC_REQ_IN_EXCP ADD CONSTRAINT F1T197P0 PRIMARY KEY
(F1_SYNC_REQ_IN_ID,SEQNO) USING INDEX;

```

## Child Table: F1\_SYNC\_REQ\_IN\_EXCP\_PARM

```

CREATE TABLE F1_SYNC_REQ_IN_EXCP_PARM
(
  F1_SYNC_REQ_IN_ID CHAR(14) NOT NULL ENABLE,
  SEQNO              NUMBER(5,0) NOT NULL ENABLE,
  PARM_SEQ           NUMBER(3,0) NOT NULL ENABLE,
  MSG_PARM_VAL       VARCHAR2(30) DEFAULT ' ' NOT NULL ENABLE,
  MSG_PARM_TYP_FLG   CHAR(4) DEFAULT ' ' NOT NULL ENABLE,
  VERSION            NUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
  CONSTRAINT F1_SYNC_REQ_IN_EXCP_PARM_FK FOREIGN
KEY(F1_SYNC_REQ_IN_ID) REFERENCES F1_SYNC_REQ_IN ON DELETE CASCADE
)
PARTITION BY REFERENCE (F1_SYNC_REQ_IN_EXCP_PARM_FK)
ENABLE ROW MOVEMENT;

```

**INDEX**

```

CREATE UNIQUE INDEX F1T198P0 ON
F1_SYNC_REQ_IN_EXCP_PARM(F1_SYNC_REQ_IN_ID,SEQNO,PARAM_SEQ) TABLESPACE
CM_F1T191_IND
GLOBAL PARTITION BY RANGE (F1_SYNC_REQ_IN_ID)
(
PARTITION P1 VALUES LESS THAN ( '12499999999999' ),
PARTITION P2 VALUES LESS THAN ( '24999999999999' ),
PARTITION P3 VALUES LESS THAN ( '37499999999999' ),
PARTITION P4 VALUES LESS THAN ( '49999999999999' ),
PARTITION P5 VALUES LESS THAN ( '62499999999999' ),
PARTITION P6 VALUES LESS THAN ( '74999999999999' ),
PARTITION P7 VALUES LESS THAN ( '87499999999999' ),
PARTITION P8 VALUES LESS THAN ( MAXVALUE )
)
COMPRESS ADVANCED LOW;

ALTER TABLE F1_SYNC_REQ_IN_EXCP_PARM ADD CONSTRAINT F1T198P0 PRIMARY
KEY (F1_SYNC_REQ_IN_ID,SEQNO,PARAM_SEQ) USING INDEX;

```

**Child Table: F1\_SYNC\_REQ\_IN\_LOG**

```

CREATE TABLE F1_SYNC_REQ_IN_LOG
(
F1_SYNC_REQ_IN_ID CHAR(14) NOT NULL ENABLE,
SEQNO NUMBER(5,0) NOT NULL ENABLE,
LOG_ENTRY_TYPE_FLG CHAR(4) DEFAULT ' ' NOT NULL ENABLE,
LOG_DTTM DATE NOT NULL ENABLE,
BO_STATUS_CD CHAR(12) DEFAULT ' ' NOT NULL ENABLE,
MESSAGE_CAT_NBR NUMBER(5,0) DEFAULT 0 NOT NULL ENABLE,
MESSAGE_NBR NUMBER(5,0) DEFAULT 0 NOT NULL ENABLE,
CHAR_TYPE_CD CHAR(8) DEFAULT ' ' NOT NULL ENABLE,
CHAR_VAL CHAR(16) DEFAULT ' ' NOT NULL ENABLE,
ADHOC_CHAR_VAL VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
CHAR_VAL_FK1 VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
CHAR_VAL_FK2 VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
CHAR_VAL_FK3 VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
CHAR_VAL_FK4 VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
CHAR_VAL_FK5 VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
DESCRLONG VARCHAR2(4000) DEFAULT ' ' NOT NULL ENABLE,
USER_ID CHAR(8) DEFAULT ' ' NOT NULL ENABLE,
VERSION NUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
CONSTRAINT F1_SYNC_REQ_IN_LOG_FK FOREIGN KEY(F1_SYNC_REQ_IN_ID)
REFERENCES F1_SYNC_REQ_IN ON DELETE CASCADE
)
PARTITION BY REFERENCE (F1_SYNC_REQ_IN_LOG_FK)
ENABLE ROW MOVEMENT;

```

**INDEX**

```

CREATE UNIQUE INDEX F1T194P0 ON
F1_SYNC_REQ_IN_LOG(F1_SYNC_REQ_IN_ID,SEQNO) TABLESPACE CM_F1T191_IND
GLOBAL PARTITION BY RANGE (F1_SYNC_REQ_IN_ID)
(
PARTITION P1 VALUES LESS THAN ( '12499999999999' ),
PARTITION P2 VALUES LESS THAN ( '24999999999999' ),
PARTITION P3 VALUES LESS THAN ( '37499999999999' ),
PARTITION P4 VALUES LESS THAN ( '49999999999999' ),
PARTITION P5 VALUES LESS THAN ( '62499999999999' ),
PARTITION P6 VALUES LESS THAN ( '74999999999999' ),
)

```

```

PARTITION P7 VALUES LESS THAN ( '8749999999999' ),
PARTITION P8 VALUES LESS THAN ( MAXVALUE )
)
COMPRESS ADVANCED LOW;

ALTER TABLE F1_SYNC_REQ_IN_LOG ADD CONSTRAINT F1T194P0 PRIMARY KEY
(F1_SYNC_REQ_IN_ID,SEQNO) USING INDEX;

CREATE INDEX F1T194S1 ON F1_SYNC_REQ_IN_LOG (CHAR_TYPE_CD,CHAR_VAL_FK1)
TABLESPACE CM_F1T191_IND COMPRESS ADVANCED LOW;

CREATE INDEX F1T194S2 ON F1_SYNC_REQ_IN_LOG (CHAR_TYPE_CD,CHAR_VAL)
TABLESPACE CM_F1T191_IND COMPRESS ADVANCED LOW;

```

## Child Table: F1\_SYNC\_REQ\_IN\_LOG\_PARM

```

CREATE TABLE F1_SYNC_REQ_IN_LOG_PARM
(
    F1_SYNC_REQ_IN_ID CHAR(14) NOT NULL ENABLE,
    SEQNO              NUMBER(5,0) NOT NULL ENABLE,
    PARM_SEQ           NUMBER(3,0) NOT NULL ENABLE,
    MSG_PARM_VAL       VARCHAR2(30) DEFAULT ' ' NOT NULL ENABLE,
    MSG_PARM_TYP_FLG  CHAR(4) DEFAULT ' ' NOT NULL ENABLE,
    VERSION            NUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
    CONSTRAINT F1_SYNC_REQ_IN_LOG_PARM_FK FOREIGN
KEY (F1_SYNC_REQ_IN_ID) REFERENCES F1_SYNC_REQ_IN ON DELETE CASCADE
)
PARTITION BY REFERENCE (F1_SYNC_REQ_IN_LOG_PARM_FK)
ENABLE ROW MOVEMENT;

```

## INDEX

```

CREATE UNIQUE INDEX F1T195P0 ON
F1_SYNC_REQ_IN_LOG_PARM (F1_SYNC_REQ_IN_ID,SEQNO,PARM_SEQ) TABLESPACE
CM_F1T191_IND
GLOBAL PARTITION BY RANGE (F1_SYNC_REQ_IN_ID)
(
    PARTITION P1 VALUES LESS THAN ( '1249999999999' ),
    PARTITION P2 VALUES LESS THAN ( '2499999999999' ),
    PARTITION P3 VALUES LESS THAN ( '3749999999999' ),
    PARTITION P4 VALUES LESS THAN ( '4999999999999' ),
    PARTITION P5 VALUES LESS THAN ( '6249999999999' ),
    PARTITION P6 VALUES LESS THAN ( '7499999999999' ),
    PARTITION P7 VALUES LESS THAN ( '8749999999999' ),
    PARTITION P8 VALUES LESS THAN ( MAXVALUE )
)
COMPRESS ADVANCED LOW;

ALTER TABLE F1_SYNC_REQ_IN_LOG_PARM ADD CONSTRAINT F1T195P0 PRIMARY
KEY (F1_SYNC_REQ_IN_ID,SEQNO,PARM_SEQ) USING INDEX;

```

## Child Table: F1\_SYNC\_REQ\_IN\_REL\_OBJ

```

CREATE TABLE F1_SYNC_REQ_IN_REL_OBJ
(
    F1_SYNC_REQ_IN_ID CHAR(14) NOT NULL ENABLE,
    MAINT_OBJ_CD       CHAR(12) DEFAULT ' ' NOT NULL ENABLE,
    REL_OBJ_TYPE_FLG  CHAR(4) DEFAULT ' ' NOT NULL ENABLE,
    PK_VALUE1          VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,

```

```

        PK_VALUE2          VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
        PK_VALUE3          VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
        PK_VALUE4          VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
        PK_VALUE5          VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
        VERSION            NUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
        CONSTRAINT F1_SYNC_REQ_IN_REL_OBJ_FK FOREIGN KEY (F1_SYNC_REQ_IN_ID)
REFERENCES F1_SYNC_REQ_IN ON DELETE CASCADE
)
PARTITION BY REFERENCE (F1_SYNC_REQ_IN_REL_OBJ_FK)
ENABLE ROW MOVEMENT;

```

## INDEX

```

CREATE UNIQUE INDEX F1T192P0 ON
F1_SYNC_REQ_IN_REL_OBJ(F1_SYNC_REQ_IN_ID, MAINT_OBJ_CD,
REL_OBJ_TYPE_FLG) TABLESPACE CM_F1T191_IND
GLOBAL PARTITION BY RANGE (F1_SYNC_REQ_IN_ID)
(
PARTITION P1 VALUES LESS THAN ( '12499999999999' ),
PARTITION P2 VALUES LESS THAN ( '24999999999999' ),
PARTITION P3 VALUES LESS THAN ( '37499999999999' ),
PARTITION P4 VALUES LESS THAN ( '49999999999999' ),
PARTITION P5 VALUES LESS THAN ( '62499999999999' ),
PARTITION P6 VALUES LESS THAN ( '74999999999999' ),
PARTITION P7 VALUES LESS THAN ( '87499999999999' ),
PARTITION P8 VALUES LESS THAN ( MAXVALUE )
)
COMPRESS ADVANCED LOW;

ALTER TABLE F1_SYNC_REQ_IN_REL_OBJ ADD CONSTRAINT F1T192P0 PRIMARY KEY
(F1_SYNC_REQ_IN_ID, MAINT_OBJ_CD, REL_OBJ_TYPE_FLG) USING INDEX;

CREATE INDEX F1T192S1 ON F1_SYNC_REQ_IN_REL_OBJ(PK_VALUE1) TABLESPACE
CM_F1T191_IND;

```

# Appendix B

## Sample SQL For Enabling ILM in CCB (Existing Installation)

This section provides additional details related to supporting ILM in an existing installation. It includes the sample syntax for each step using the To Do Entry maintenance object as an example. Other maintenance object's implementations can follow a similar pattern.

1. Rename existing table CI\_TD\_ENTRY and primary key index as a backup. It is suggested to use an ILM\_ prefix. The following are sample statements:

```
ALTER TABLE CI_TD_ENTRY RENAME TO ILM_TD_ENTRY;  
ALTER INDEX XT039P0 RENAME TO ILM_XT039P0;
```

2. Generate DDL for the secondary index.

```
set heading off;  
set echo off;  
Set pages 999;  
set long 90000;  
  
spool ddl_list.sql  
select dbms_metadata.get_ddl('INDEX','XT039S2','CISADM') from dual;  
select dbms_metadata.get_ddl('INDEX','XT039S3','CISADM') from dual;  
select dbms_metadata.get_ddl('INDEX','XT039S4','CISADM') from dual;  
select dbms_metadata.get_ddl('INDEX','XT039S5','CISADM') from dual;  
select dbms_metadata.get_ddl('INDEX','XT039S6','CISADM') from dual;  
select dbms_metadata.get_ddl('INDEX','XT039S7','CISADM') from dual;  
select dbms_metadata.get_ddl('INDEX','XT039S8','CISADM') from dual;  
spool off;
```

3. Drop secondary indexes.

```
DROP INDEX CISADM.XT039S2;  
DROP INDEX CISADM.XT039S3;  
DROP INDEX CISADM.XT039S4;  
DROP INDEX CISADM.XT039S5;  
DROP INDEX CISADM.XT039S6;  
DROP INDEX CISADM.XT039S7;  
DROP INDEX CISADM.XT039S8;
```

4. Create Partitioned Table.

In the following example ILM\_DT value is inserted from column CRE\_DTTM. The degree setting of 'parallel' in the DDL can be adjusted according to the table's data, its means and its size.

```
CREATE TABLE CI_TD_ENTRY (  
  TD_ENTRY_ID    CHAR(14) NOT NULL ENABLE,  
  BATCH_CD       CHAR(8)  DEFAULT ' ' NOT NULL ENABLE,  
  BATCH_NBR      NUMBER(10,0) DEFAULT 0 NOT NULL ENABLE,  
  MESSAGE_CAT_NBR NUMBER(5,0) DEFAULT 0 NOT NULL ENABLE,  
  MESSAGE_NBR    NUMBER(5,0) DEFAULT 0 NOT NULL ENABLE,
```



```

ASSIGNED_TO      CHAR(8) DEFAULT ' ' NOT NULL ENABLE,
TD_TYPE_CD       CHAR(8) DEFAULT ' ' NOT NULL ENABLE,
ROLE_ID          CHAR(10) DEFAULT ' ' NOT NULL ENABLE,
ENTRY_STATUS_FLG CHAR(2) DEFAULT ' ' NOT NULL ENABLE,
VERSION          NUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
CRE_DTTM DATE,
ASSIGNED_DTTM DATE,
COMPLETE_DTTM DATE,
COMPLETE_USER_ID CHAR(8) DEFAULT ' ' NOT NULL ENABLE,
COMMENTS        VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
ASSIGNED_USER_ID CHAR(8) DEFAULT ' ' NOT NULL ENABLE,
TD_PRIORITY_FLG CHAR(4) DEFAULT ' ' NOT NULL ENABLE,
ILM_DT DATE,
ILM_ARCH_SW CHAR(1)
) NOLOGGING PARALLEL
ENABLE ROW MOVEMENT
PARTITION BY RANGE (ILM_DT)
SUBPARTITION BY RANGE (TD_ENTRY_ID) SUBPARTITION TEMPLATE
(
SUBPARTITION S01 VALUES LESS THAN ( '1249999999999999' ),
SUBPARTITION S02 VALUES LESS THAN ( '2499999999999999' ),
SUBPARTITION S03 VALUES LESS THAN ( '3749999999999999' ),
SUBPARTITION S04 VALUES LESS THAN ( '4999999999999999' ),
SUBPARTITION S05 VALUES LESS THAN ( '6249999999999999' ),
SUBPARTITION S06 VALUES LESS THAN ( '7499999999999999' ),
SUBPARTITION S07 VALUES LESS THAN ( '8749999999999999' ),
SUBPARTITION SMAX VALUES LESS THAN ( MAXVALUE )
)
(
PARTITION "P2017JAN" VALUES LESS THAN (TO_DATE('2017-02-01 00:00:01', 'SYYYY-MM-DD
HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT039 P2017JAN,
PARTITION "P2017FEB" VALUES LESS THAN (TO_DATE('2017-03-01 00:00:01', 'SYYYY-MM-DD
HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT039 P2017FEB,
PARTITION "P2017MAR" VALUES LESS THAN (TO_DATE('2017-04-01 00:00:01', 'SYYYY-MM-DD
HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT039 P2017MAR,
PARTITION "P2017APR" VALUES LESS THAN (TO_DATE('2017-05-01 00:00:01', 'SYYYY-MM-DD
HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT039 P2017APR,
PARTITION "P2017MAY" VALUES LESS THAN (TO_DATE('2017-06-01 00:00:01', 'SYYYY-MM-DD
HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT039 P2017MAY,
PARTITION "P2017JUN" VALUES LESS THAN (TO_DATE('2017-07-01 00:00:01', 'SYYYY-MM-DD
HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT039 P2017JUN,
PARTITION "P2017JUL" VALUES LESS THAN (TO_DATE('2017-08-01 00:00:01', 'SYYYY-MM-DD
HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT039 P2017JUL,
PARTITION "P2017AUG" VALUES LESS THAN (TO_DATE('2017-09-01 00:00:01', 'SYYYY-MM-DD
HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT039 P2017AUG,
PARTITION "P2017SEP" VALUES LESS THAN (TO_DATE('2017-10-01 00:00:01', 'SYYYY-MM-DD
HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT039 P2017SEP,
PARTITION "P2017OCT" VALUES LESS THAN (TO_DATE('2017-11-01 00:00:01', 'SYYYY-MM-DD
HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT039 P2017OCT,
PARTITION "P2017NOV" VALUES LESS THAN (TO_DATE('2017-12-01 00:00:01', 'SYYYY-MM-DD
HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT039 P2017NOV,
PARTITION "P2017DEC" VALUES LESS THAN (TO_DATE('2018-01-01 00:00:01', 'SYYYY-MM-DD
HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT039 P2017DEC,
PARTITION "PMAX" VALUES LESS THAN (MAXVALUE)
tablespace CM_XT039 PMAX
)as select /* PARALLEL */
)as select /* PARALLEL */
TD_ENTRY_ID,
BATCH_CD,
BATCH_NBR,
MESSAGE_CAT_NBR,
MESSAGE_NBR,
ASSIGNED_TO,
TD_TYPE_CD,
ROLE_ID,
ENTRY_STATUS_FLG,
VERSION,
CRE_DTTM,
ASSIGNED_DTTM,
COMPLETE_DTTM,
COMPLETE_USER_ID,
COMMENTS,
ASSIGNED_USER_ID,

```

```

TD_PRIORITY_FLG,
CRE_DTTM as ILM_DT,
ILM_ARCH_SW
from ILM_TD_ENTRY
/

```

5. Enable logging option for table CI\_TD\_ENTRY.

```
ALTER TABLE CI_TD_ENTRY NOPARALLEL LOGGING;
```

6. Create Primary Index for Parent table CI\_TD\_ENTRY.

```
CREATE BIGFILE TABLESPACE CM_XT039_IND DATAFILE '+DATADG' SIZE 50M AUTOEXTEND ON
MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED;
```

```

CREATE UNIQUE INDEX XT039P0 ON CI_TD_ENTRY NOLOGGING PARALLEL (
TD_ENTRY_ID
)
GLOBAL PARTITION BY RANGE (TD_ENTRY_ID) (
PARTITION P1 VALUES LESS THAN ( '1249999999999999' ),
PARTITION P2 VALUES LESS THAN ( '2499999999999999' ),
PARTITION P3 VALUES LESS THAN ( '3749999999999999' ),
PARTITION P4 VALUES LESS THAN ( '4999999999999999' ),
PARTITION P5 VALUES LESS THAN ( '6249999999999999' ),
PARTITION P6 VALUES LESS THAN ( '7499999999999999' ),
PARTITION P7 VALUES LESS THAN ( '8749999999999999' ),
PARTITION P8 VALUES LESS THAN ( MAXVALUE )
) TABLESPACE CM_XT039_IND
/

```

```
ALTER INDEX XT039P0 LOGGING NOPARALLEL;
```

7. Add Primary Key for Parent table CI\_TD\_ENTRY.

```
ALTER TABLE CI_TD_ENTRY ADD CONSTRAINT XT039P0 PRIMARY KEY(TD_ENTRY_ID) USING INDEX
/
```

8. Create Secondary Indexes for Parent table CI\_TD\_ENTRY.

```
CREATE UNIQUE INDEX CM_ILM_XT039S8 ON CI_TD_ENTRY ( ILM_DT, ILM_ARCH_SW, TD_ENTRY_ID )
LOCAL COMPRESS ADVANCED LOW
/
```

```
CREATE UNIQUE INDEX XT039S2 ON CI_TD_ENTRY ( ASSIGNED_TO, TD_ENTRY_ID ) TABLESPACE
CM_XT039_IND COMPRESS ADVANCED LOW
/
```

```
CREATE INDEX XT039S3 ON CI_TD_ENTRY ( ENTRY_STATUS_FLG, ASSIGNED_TO ) TABLESPACE
CM_XT039_IND COMPRESS ADVANCED LOW
/
```

```
CREATE INDEX XT039S4 ON CI_TD_ENTRY ( ROLE_ID, TD_TYPE_CD, ENTRY_STATUS_FLG,
TD_PRIORITY_FLG, ASSIGNED_TO, CRE_DTTM ) TABLESPACE CM_XT039_IND COMPRESS ADVANCED LOW
/
```

```
CREATE INDEX XT039S5 ON CI_TD_ENTRY ( BATCH_CD, BATCH_NBR, ENTRY_STATUS_FLG )
TABLESPACE CM_XT039_IND COMPRESS ADVANCED LOW
/
```

```
CREATE UNIQUE INDEX XT039S6 ON CI_TD_ENTRY ( TD_ENTRY_ID, ASSIGNED_TO,
ENTRY_STATUS_FLG ) TABLESPACE CM_XT039_IND COMPRESS ADVANCED LOW
/
```

```
CREATE UNIQUE INDEX XT039S7 ON CI_TD_ENTRY ( COMPLETE_USER_ID, COMPLETE_DTTM,
TD_ENTRY_ID ) TABLESPACE CM_XT039_IND COMPRESS ADVANCED LOW
/
```

9. After verification of the ILM based tables, user can drop the backup tables “ILM” renamed table.
10. Create all child Tables, Primary Key, Primary Indexes and Secondary Indexes as shown below.

Repeat the following steps for all child tables.

#### Create Child Table CI\_TD\_DRLKEY

```
CREATE TABLE CI_TD_DRLKEY
(
TD_ENTRY_ID NOT NULL ENABLE,
```

```

SEQ_NUM      NOT NULL ENABLE,
KEY_VALUE    DEFAULT ' ' NOT NULL ENABLE,
VERSION      DEFAULT 1 NOT NULL ENABLE,
CONSTRAINT CI_TD_DRLKEY_FK FOREIGN KEY(TD_ENTRY_ID) REFERENCES CI_TD_ENTRY ON DELETE
CASCADE
)
PARTITION BY REFERENCE (CI_TD_DRLKEY_FK)
ENABLE ROW MOVEMENT
AS SELECT /*+ PARALLEL */ * FROM ILM_CI_TD_DRLKEY;

```

### Create Index

```

CREATE UNIQUE INDEX XT037P0 ON CI_TD_DRLKEY ( TD_ENTRY_ID, SEQ_NUM ) TABLESPACE
CM_XT039_IND NOLOGGING PARALLEL
GLOBAL PARTITION BY RANGE (TD_ENTRY_ID)
(
PARTITION P1 VALUES LESS THAN ( '124999999999' ),
PARTITION P2 VALUES LESS THAN ( '249999999999' ),
PARTITION P3 VALUES LESS THAN ( '374999999999' ),
PARTITION P4 VALUES LESS THAN ( '499999999999' ),
PARTITION P5 VALUES LESS THAN ( '624999999999' ),
PARTITION P6 VALUES LESS THAN ( '749999999999' ),
PARTITION P7 VALUES LESS THAN ( '874999999999' ),
PARTITION P8 VALUES LESS THAN ( MAXVALUE )
)
COMPRESS ADVANCED LOW;

ALTER INDEX XT037P0 LOGGING NOPARALLEL;

ALTER TABLE CI_TD_DRLKEY ADD CONSTRAINT XT037P0 PRIMARY KEY(TD_ENTRY_ID, SEQ_NUM) USING
INDEX;

CREATE INDEX XT037S1 ON CI_TD_DRLKEY ( KEY_VALUE, TD_ENTRY_ID ) TABLESPACE CM_XT039_IND
COMPRESS ADVANCED LOW;

```

# Appendix C

---

## Sample SQL for Periodic Maintenance

This appendix provides additional details related to creating new partitions over time as well as archiving and restoring partitions. The To Do Entry and Inbound Sync Request maintenance objects are used as examples. This section contains the following steps:

- [Add Partition](#)
- [Archive Partition](#)
- [Restore Partition](#)

## Add Partition

1. Create separate tablespace for new partition

```
CREATE BIGFILE TABLESPACE CM_XT039_P2016JAN DATAFILE '+DATA' SIZE
50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS
ADVANCED;
```

2. Add partition using split operation on MAXVALUE Partition

```
ALTER TABLE CISADM.CI_TD_ENTRY SPLIT PARTITION PMAX AT
(TO_DATE('2016-02-01 00:00:01','YYYY-MM-DD HH24:MI:SS'))
INTO
(
PARTITION P2016JAN TABLESPACE CM_XT039_P2016JAN, PARTITION PMAX
)
UPDATE INDEXES;
```

In case table contains LOBS like F1\_SYNC\_REQ\_IN, there will be additional statement in split partition DDL indicating tablespace on which LOB should go.

```
ALTER TABLE CISADM.F1_SYNC_REQ_IN SPLIT PARTITION PMAX AT
(TO_DATE('2016-02-01 00:00:01','YYYY-MM-DD HH24:MI:SS'))
INTO
(
PARTITION P2016JAN TABLESPACE CM_F1T191_P2016JAN
LOB(BO_DATA_AREA, POST_TRN_BO_DATA_AREA, PRE_TRN_FIN_BO_DATA_AREA,
PRE_TRN_INIT_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE IN
ROW COMPRESS MEDIUM CACHE TABLESPACE CM_F1T191_P2016JAN )
,
PARTITION PMAX
)
UPDATE INDEXES;
```

3. Enable advanced compression after SPLIT partition as it will disable the compression.

```
ALTER TABLE CISADM.CI_TD_SRTKEY ROW STORE COMPRESS ADVANCED;
ALTER TABLE CISADM.CI_TD_MSG_PARM ROW STORE COMPRESS ADVANCED;
ALTER TABLE CISADM.CI_TD_DRLKEY ROW STORE COMPRESS ADVANCED;
ALTER TABLE CISADM.CI_TD_ENTRY_CHA ROW STORE COMPRESS ADVANCED;
ALTER TABLE CISADM.CI_TD_LOG ROW STORE COMPRESS ADVANCED;
```

## Archive Partition

1. Make the tablespace to be archived READ ONLY.

```
ALTER TABLESPACE CM_XT039_P2017JAN READ ONLY;
```

2. Check the feasibility of archive using ILM\_ARCH\_SW = 'N'.

```
Select count(1) from CISADM.CI_TD_ENTRY PARTITION P2017JAN where
ILM_ARCH_SW = 'N';
```

- If Yes (count of records of above query is ZERO), then proceed for further steps.
- If No (count of records of above query is Non ZERO), then make the tablespace back to READ WRITE MODE as Archive is not Feasible at the time.

```
ALTER TABLESPACE CM_XT039_P2017JAN READ WRITE;
```

3. Create separate archive tablespace for partition need to be archived.

```
CREATE BIGFILE TABLESPACE CM_XT039_P2017JAN_ARC DATAFILE '+DATA'
SIZE 50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS
ADVANCED;
```

4. Create staging tables and load data for all child tables for the MO first.

- a. **CI\_TD\_ENTRY\_CHA**

```
CREATE TABLE CM_XT701_P2017JAN_ARC PARALLEL NOLOGGING
TABLESPACE CM_XT039_P2017JAN_ARC
AS
(
SELECT /*+ PARALLEL */ * FROM CISADM.CI_TD_ENTRY_CHA PARTITION
(P2017JAN_S01)
UNION ALL
SELECT /*+ PARALLEL */ * FROM CI_TD_ENTRY_CHA PARTITION
(P2017JAN_S02)
UNION ALL
.
.
.
UNION ALL
SELECT /*+ PARALLEL */ * FROM CI_TD_ENTRY_CHA PARTITION
(P2017JAN_S08)
);
ALTER TABLE CM_XT701_P2017JAN_ARC NOPARALLEL LOGGING;
```

- b. **CI\_TD\_MSG\_PARM**

```
CREATE TABLE CM_XT04_P2017JAN_ARC PARALLEL NOLOGGING TABLESPACE
CM_XT039_P2017JAN_ARC
AS
(
SELECT /*+ PARALLEL */ * FROM CISADM.CI_TD_MSG_PARM PARTITION
(P2017JAN_S01)
UNION ALL
SELECT /*+ PARALLEL */ * FROM CI_TD_MSG_PARM PARTITION
(P2017JAN_S02)
UNION ALL
.
.
.
UNION ALL
SELECT /*+ PARALLEL */ * FROM CI_TD_MSG_PARM PARTITION
(P2017JAN_S08)
);
ALTER TABLE CM_XT04_P2017JAN_ARC NOPARALLEL LOGGING;
```

- c. **CI\_TD\_LOG**

```
CREATE TABLE CM_XT721_P2017JAN_ARC PARALLEL NOLOGGING
TABLESPACE CM_XT039_P2017JAN_ARC
AS
(
SELECT /*+ PARALLEL */ * FROM CISADM.CI_TD_LOG PARTITION
(P2017JAN_S01)
UNION ALL
```

```

SELECT /*+ PARALLEL */ * FROM CI_TD_LOG PARTITION (P2017JAN_S02)
UNION ALL
.
.
.
UNION ALL
SELECT /*+ PARALLEL */ * FROM CI_TD_LOG PARTITION (P2017JAN_S08)
);
ALTER TABLE CM_XT721_P2017JAN_ARC NOPARALLEL LOGGING;

```

d. CI\_TD\_SRTKEY

```

CREATE TABLE CM_XT041_P2017JAN_ARC PARALLEL NOLOGGING
TABLESPACE CM_XT039_P2017JAN_ARC
AS
(
SELECT /*+ PARALLEL */ * FROM CISADM.CI_TD_SRTKEY PARTITION
(P2017JAN_S01)
UNION ALL
SELECT /*+ PARALLEL */ * FROM CI_TD_SRTKEY PARTITION
(P2017JAN_S02)
UNION ALL
.
.
.
UNION ALL
SELECT /*+ PARALLEL */ * FROM CI_TD_SRTKEY PARTITION
(P2017JAN_S08)
);
ALTER TABLE CM_XT041_P2017JAN_ARC NOPARALLEL LOGGING;

```

e. CI\_TD\_DRLKEY

```

CREATE TABLE CM_XT037_P2017JAN_ARC PARALLEL NOLOGGING
TABLESPACE CM_XT039_P2017JAN_ARC
AS
(
SELECT /*+ PARALLEL */ * FROM CISADM.CI_TD_DRLKEY PARTITION
(P2017JAN_S01)
UNION ALL
SELECT /*+ PARALLEL */ * FROM CISADM.CI_TD_DRLKEY PARTITION
(P2017JAN_S02)
UNION ALL
.
.
.
UNION ALL
SELECT /*+ PARALLEL */ * FROM CISADM.CI_TD_DRLKEY PARTITION
(P2017JAN_S08)
);
ALTER TABLE CM_XT037_P2017JAN_ARC NOPARALLEL LOGGING;

```

5. Create staging table and load data for parent table.

```

CREATE TABLE CM_XT039_P2017JAN_ARC NOLOGGING PARALLEL
TABLESPACE CM_XT039_P2017JAN_ARC AS
SELECT /*+ PARALLEL */ * FROM CISADM.CI_TD_ENTRY PARTITION
(P2017JAN);

ALTER TABLE CM_XT039_P2017JAN_ARC NOPARALLEL LOGGING;

```

- Export tablespace using TRANSPORT\_TABLESPACES method.

```
ALTER TABLESPACE CM_XT039_P2017JAN_ARC READ ONLY;

expdp system/manager DIRECTORY=DUMP_DIR DUMPFILE=
CM_XT039_P2017JAN_ARC.DMP TRANSPORT_TABLESPACES =
CM_XT039_P2017JAN_ARC LOGFILE=EXP_CM_XT039_P2017JAN_ARC.LOG
TRANSPORT_FULL_CHECK=Y
```

Ensure tablespace datafile required for further import should be preserved.

```
<<Transport THE FILE to LOCAL DB DIRECTORY DUMP_DIR like
connected to asmcmd and copied the file from cp
cm_xt039_p201701_tbs_ar.553.913864937 /tugbu_perf_02/BACKUPS/
test_verification/ >>
```

- Drop the partition, partition tablespace and archive tablespace (as it is already exported).

```
ALTER TABLE CISADM.CI_TD_ENTRY DROP PARTITION P2017JAN UPDATE
INDEXES;
DROP TABLESPACE CM_XT039_P2017JAN INCLUDING CONTENTS AND
DATAFILES;
DROP TABLESPACE CM_XT039_P2017JAN_ARC INCLUDING CONTENTS AND
DATAFILES;
```

## Restore Partition

- Create separate tablespace to restore the partition.

```
CREATE BIGFILE TABLESPACE CM_XT039_P2017JAN DATAFILE '+DATA'
SIZE 50M AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE
COMPRESS ADVANCED;
```

- Add partition using split operation on next greater value partition

```
ALTER TABLE CISADM.CI_TD_ENTRY SPLIT PARTITION P2017FEB AT
(TO_DATE('2017-02-01 00:00:01','SYYYYY-MM-DD HH24:MI:SS'))
INTO
(
PARTITION P2017JAN TABLESPACE CM_XT039_P2017JAN , PARTITION
P2017FEB
)
UPDATE INDEXES;
```

In case table contains LOBS like F1\_SYNC\_REQ\_IN, there will be additional statement in split partition DDL indicating tablespace on which LOB should go.

```
ALTER TABLE CISADM.F1_SYNC_REQ_IN SPLIT PARTITION P2017FEB AT
(TO_DATE('2017-02-01 00:00:01','SYYYYY-MM-DD HH24:MI:SS'))
INTO
(
PARTITION P2017JAN TABLESPACE CM_F1T191_P2017JAN
LOB(BO_DATA_AREA,PRE_TRN_INIT_BO_DATA_AREA,PRE_TRN_FIN_BO_DATA_
AREA,POST_TRN_BO_DATA_AREA) STORE AS SECUREFILE (ENABLE STORAGE
IN ROW COMPRESS MEDIUM CACHE TABLESPACE
CM_F1T191_P2017JAN )
, PARTITION P2017FEB
```



```
)
UPDATE INDEXES;
```

3. Enable advanced compression after SPLIT partition as it will disable the compression.

```
ALTER TABLE CISADM.CI_TD_SRTKEY ROW STORE COMPRESS ADVANCED;
ALTER TABLE CISADM.CI_TD_MSG_PARM ROW STORE COMPRESS ADVANCED;
ALTER TABLE CISADM.CI_TD_DRLKEY ROW STORE COMPRESS ADVANCED;
ALTER TABLE CISADM.CI_TD_ENTRY_CHA ROW STORE COMPRESS ADVANCED;
ALTER TABLE CISADM.CI_TD_LOG ROW STORE COMPRESS ADVANCED;
```

4. Import tablespace using TRANSPORT\_TABLESPACES method.

```
impdp system/manager DIRECTORY=DUMP_DIR DUMPFILE=
CM_XT039_P2017JAN_ARC.DMP PARTITION_OPTIONS=DEPARTITION
LOGFILE=IMP_CM_XT039_P2017JAN_ARC.LOG TRANSPORT_DATAFILES=/
tugbu_perf_02/BACKUPS/test_verification/
cm_xt039_p201701jan_ar.553.913864937
```

5. Load data into parent table first from the staging table

```
ALTER SESSION ENABLE PARALLEL DML;

INSERT /*+ APPEND PARALLEL */ INTO CISADM.CI_TD_ENTRY SELECT /
/*+ PARALLEL */ * FROM CM_XT039_P2017JAN_ARC;
COMMIT;
```

6. Load data into child table from the staging table

For each Child IN LIST OF CHILD TABLES, perform the following:

```
INSERT /*+ APPEND PARALLEL */ INTO CISADM.CI_TD_ENTRY_CHA
SELECT /*+ PARALLEL */ * FROM CM_XT701_P2017JAN_ARC;
COMMIT;
INSERT /*+ APPEND PARALLEL */ INTO CISADM.CI_TD_MSG_PARM
SELECT /*+ PARALLEL */ * FROM CM_XT04_P2017JAN_ARC;
COMMIT;
```

```
INSERT /*+ APPEND PARALLEL */ INTO CISADM.CI_TD_LOG SELECT /*+
PARALLEL */ * FROM CM_XT721_P2017JAN_ARC;
COMMIT;
```

```
INSERT /*+ APPEND PARALLEL */ INTO CISADM.CI_TD_SRTKEY SELECT
/*+ PARALLEL */ * FROM CM_XT041_P2017JAN_ARC;
COMMIT;
```

```
INSERT /*+ APPEND PARALLEL */ INTO CISADM.CI_TD_DRLKEY SELECT
/*+ PARALLEL */ * FROM CM_XT037_P2017JAN_ARC;
COMMIT;
```

7. Drop the archive tablespace after import is import and data loading is successful.

```
DROP TABLESPACE CM_XT039_P2017JAN_ARC INCLUDING CONTENTS AND
DATAFILES;
```

# Appendix D

---

## Sample SQL for ILM in CCB

These are the sample SQL scripts which has the recommended way to partition the Bill Segment and Adjustment tables and Indexes. Implementations can further customize these scripts and update the partition names, tablespace names and date ranges to make sure they are suited to the implementation.

This appendix consists:

- [Maintenance Object: Adjustment](#)
- [Maintenance Object: Bill Segment](#)

# Maintenance Object: Adjustment

This section contains the sample SQL for the following tables:

- [Parent Table: CI\\_ADJ](#)
  - [Child Table: CI\\_ADJ\\_APREQ](#)
  - [Child Table: CI\\_ADJ\\_CALC\\_LN](#)
    - [Child Table: CI\\_ADJ\\_CL\\_CHAR](#)
  - [Child Table: CI\\_ADJ\\_CHAR](#)

## Parent Table: CI\_ADJ

```

CREATE BIGFILE TABLESPACE CM_XT012_P2017JAN DATAFILE '+DATA' SIZE 100M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED
/
CREATE BIGFILE TABLESPACE CM_XT012_P2017FEB DATAFILE '+DATA' SIZE 100M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED
/
CREATE BIGFILE TABLESPACE CM_XT012_P2017MAR DATAFILE '+DATA' SIZE 100M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED
/
CREATE BIGFILE TABLESPACE CM_XT012_P2017APR DATAFILE '+DATA' SIZE 100M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED
/
CREATE BIGFILE TABLESPACE CM_XT012_P2017MAY DATAFILE '+DATA' SIZE 100M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED
/
CREATE BIGFILE TABLESPACE CM_XT012_P2017JUN DATAFILE '+DATA' SIZE 100M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED
/
CREATE BIGFILE TABLESPACE CM_XT012_P2017JUL DATAFILE '+DATA' SIZE 100M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED
/
CREATE BIGFILE TABLESPACE CM_XT012_P2017AUG DATAFILE '+DATA' SIZE 100M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED
/
CREATE BIGFILE TABLESPACE CM_XT012_P2017SEP DATAFILE '+DATA' SIZE 100M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED
/
CREATE BIGFILE TABLESPACE CM_XT012_P2017OCT DATAFILE '+DATA' SIZE 100M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED
/
CREATE BIGFILE TABLESPACE CM_XT012_P2017NOV DATAFILE '+DATA' SIZE 100M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED
/
CREATE BIGFILE TABLESPACE CM_XT012_P2017DEC DATAFILE '+DATA' SIZE 100M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED
/
CREATE BIGFILE TABLESPACE CM_XT012_PMAX DATAFILE '+DATA' SIZE 100M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED
/

CREATE TABLE CI_ADJ
(  CHAR(12) NOT NULL ENABLE,
  ADJ_ID
  SA_IDCHAR(10) DEFAULT ' ' NOT NULL ENABLE,
  ADJ_TYPE_CDCHAR(8) DEFAULT ' ' NOT NULL ENABLE,
  ADJ_STATUS_FLG CHAR(2) DEFAULT ' ' NOT NULL ENABLE,

```

```

CRE_DT DATE,CHAR(4) DEFAULT ' ' NOT NULL ENABLE,
CAN_RSN_CD
ADJ_AMTNUMBER(15,2) DEFAULT 0 NOT NULL ENABLE,
XFER_ADJ_IDCHAR(12) DEFAULT ' ' NOT NULL ENABLE,
CURRENCY_CDCHAR(3) DEFAULT ' ' NOT NULL ENABLE,
COMMENTSVARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
VERSIONNUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
BEHALF_SA_IDCHAR(10) DEFAULT ' ' NOT NULL ENABLE,
BASE_AMTNUMBER(15,2) DEFAULT 0 NOT NULL ENABLE,
GEN_REF_DT DATE,

APPR_REQ_ID CHAR(12) DEFAULT ' ' NOT NULL ENABLE,
ADJ_DATA_AREA CLOB,
ILM_DT DATE,
ILM_ARCH_SW CHAR(1),
)
ENABLE ROW MOVEMENT
PARTITION BY RANGE (ILM_DT)
SUBPARTITION BY RANGE (ADJ_ID) SUBPARTITION TEMPLATE (
SUBPARTITION S01 VALUES LESS THAN ( '124999999999' ),
SUBPARTITION S02 VALUES LESS THAN ( '249999999999' ),
SUBPARTITION S03 VALUES LESS THAN ( '374999999999' ),
SUBPARTITION S04 VALUES LESS THAN ( '499999999999' ),
SUBPARTITION S05 VALUES LESS THAN ( '624999999999' ),
SUBPARTITION S06 VALUES LESS THAN ( '749999999999' ),
SUBPARTITION S07 VALUES LESS THAN ( '874999999999' ),
SUBPARTITION S08 VALUES LESS THAN ( MAXVALUE )
)

(
PARTITION "P2017JAN" VALUES LESS THAN (TO_DATE('2017-02-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT012_P2017JAN,
PARTITION "P2017FEB" VALUES LESS THAN (TO_DATE('2017-03-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT012_P2017FEB,
PARTITION "P2017MAR" VALUES LESS THAN (TO_DATE('2017-04-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT012_P2017MAR,

PARTITION "P2017APR" VALUES LESS THAN (TO_DATE('2017-05-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT012_P2017APR,
PARTITION "P2017MAY" VALUES LESS THAN (TO_DATE('2017-06-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT012_P2017MAY,
PARTITION "P2017JUN" VALUES LESS THAN (TO_DATE('2017-07-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT012_P2017JUN,
PARTITION "P2017JUL" VALUES LESS THAN (TO_DATE('2017-08-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT012_P2017JUL,
PARTITION "P2017AUG" VALUES LESS THAN (TO_DATE('2017-09-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT012_P2017AUG,
PARTITION "P2017SEP" VALUES LESS THAN (TO_DATE('2017-10-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT012_P2017SEP,
PARTITION "P2017OCT" VALUES LESS THAN (TO_DATE('2017-11-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT012_P2017OCT,

```

```

PARTITION "P2017NOV" VALUES LESS THAN (TO_DATE('2017-12-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT012_P2017NOV,
PARTITION "P2017DEC" VALUES LESS THAN (TO_DATE('2018-01-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT012_P2017DEC,
PARTITION "P2018" VALUES LESS THAN (MAXVALUE)
tablespace CM_XT012_PMAX
)
/

```

## INDEX

```

CREATE BIGFILE TABLESPACE CM_XT012_IND DATAFILE '+DATA' SIZE 50M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED
/

```

```

CREATE UNIQUE INDEX XT012P0 ON CI_ADJ ( ADJ_ID ) TABLESPACE
CM_XT012_IND
GLOBAL PARTITION BY RANGE (ADJ_ID)
(
PARTITION P1 VALUES LESS THAN ( '124999999999' ),
PARTITION P2 VALUES LESS THAN ( '249999999999' ),
PARTITION P3 VALUES LESS THAN ( '374999999999' ),
PARTITION P4 VALUES LESS THAN ( '499999999999' ),
PARTITION P5 VALUES LESS THAN ( '624999999999' ),
PARTITION P6 VALUES LESS THAN ( '749999999999' ),
PARTITION P7 VALUES LESS THAN ( '874999999999' ),
PARTITION P8 VALUES LESS THAN ( MAXVALUE )
)
/

```

```

ALTER TABLE CI_ADJ ADD CONSTRAINT XT012P0 PRIMARY KEY(ADJ_ID) USING
INDEX
/

```

```

CREATE INDEX XT012S1 ON CI_ADJ ( SA_ID, ADJ_TYPE_CD ) TABLESPACE
CM_XT012_IND COMPRESS ADVANCED LOW
/

```

```

CREATE UNIQUE INDEX XT012S2 ON CI_ADJ ( XFER_ADJ_ID, ADJ_ID )
TABLESPACE CM_XT012_IND COMPRESS ADVANCED LOW
/

```

```

CREATE UNIQUE INDEX XT012S3 ON CI_ADJ ( ILM_DT, ILM_ARCH_SW, ADJ_ID )
TABLESPACE CM_XT012_IND COMPRESS ADVANCED LOW
/

```

## Child Table: CI\_ADJ\_APREQ

```

CREATE TABLE CI_ADJ_APREQ
(
AP_REQ_ID          CHAR(12) NOT NULL ENABLE,
COUNTRY            CHAR(3)  DEFAULT ' ' NOT NULL ENABLE,
ADDRESS1           VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
ADJ_ID             CHAR(12) DEFAULT ' ' NOT NULL ENABLE,
ADDRESS2           VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
ADDRESS3           VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
ADDRESS4           VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
CITY               VARCHAR2(90) DEFAULT ' ' NOT NULL ENABLE,
NUM1               CHAR(6)  DEFAULT ' ' NOT NULL ENABLE,
)

```

```

NUM2          CHAR(4) DEFAULT ' ' NOT NULL ENABLE,
COUNTY       VARCHAR2(90) DEFAULT ' ' NOT NULL ENABLE,
HOUSE_TYPE    CHAR(2) DEFAULT ' ' NOT NULL ENABLE,
STATE         CHAR(6) DEFAULT ' ' NOT NULL ENABLE,
POSTAL        CHAR(12) DEFAULT ' ' NOT NULL ENABLE,
CURRENCY_PYMNT CHAR(3) DEFAULT ' ' NOT NULL ENABLE,
GEO_CODE      CHAR(11) DEFAULT ' ' NOT NULL ENABLE,
IN_CITY_LIMIT CHAR(1) DEFAULT ' ' NOT NULL ENABLE,
PAID_AMT      NUMBER(15,2) DEFAULT 0 NOT NULL ENABLE,
SCHEDULED_PAY_DT DATE,
PYMNT_DT DATE,
ENTITY_NAME   VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
PAY_DOC_ID    VARCHAR2(20) DEFAULT ' ' NOT NULL ENABLE,
PAY_DOC_DT DATE,
PYMNT_ID      CHAR(36) DEFAULT ' ' NOT NULL ENABLE,
PYMNT_METHOD_FLG CHAR(3) DEFAULT ' ' NOT NULL ENABLE,
PYMNT_SEL_STAT_FLG CHAR(1) DEFAULT ' ' NOT NULL ENABLE,
VERSION       NUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
BATCH_CD      CHAR(8) DEFAULT ' ' NOT NULL ENABLE,
BATCH_NBR     NUMBER(10,0) DEFAULT 0 NOT NULL ENABLE,
CONSTRAINT CI_ADJ_APREQ_FK FOREIGN KEY(ADJ_ID) REFERENCES CI_ADJ ON
DELETE CASCADE
)
PARTITION BY REFERENCE (CI_ADJ_APREQ_FK)
ENABLE ROW MOVEMENT
/

```

## INDEX

```

CREATE UNIQUE INDEX XT160P0 ON CI_ADJ_APREQ ( AP_REQ_ID ) TABLESPACE
CM_XT012_IND
GLOBAL PARTITION BY RANGE (AP_REQ_ID)
(
PARTITION P1 VALUES LESS THAN ( '124999999999' ),
PARTITION P2 VALUES LESS THAN ( '249999999999' ),
PARTITION P3 VALUES LESS THAN ( '374999999999' ),
PARTITION P4 VALUES LESS THAN ( '499999999999' ),
PARTITION P5 VALUES LESS THAN ( '624999999999' ),
PARTITION P6 VALUES LESS THAN ( '749999999999' ),
PARTITION P7 VALUES LESS THAN ( '874999999999' ),
PARTITION P8 VALUES LESS THAN ( MAXVALUE )
)
COMPRESS ADVANCED LOW
/

ALTER TABLE CI_ADJ_APREQ ADD CONSTRAINT XT160P0 PRIMARY KEY(AP_REQ_ID)
USING INDEX
/

CREATE INDEX XT160S1 ON CI_ADJ_APREQ ( ADJ_ID ) TABLESPACE
CM_XT012_IND
/

CREATE INDEX XT160S2 ON CI_ADJ_APREQ ( BATCH_CD, BATCH_NBR )
TABLESPACE CM_XT012_IND COMPRESS ADVANCED LOW
/

```

## Child Table: CI\_ADJ\_CALC\_LN

```

CREATE TABLE CI_ADJ_CALC_LN
(
ADJ_ID CHAR(12) NOT NULL ENABLE,
SEQNO NUMBER(5,0) NOT NULL ENABLE,

```

```

TOU_CD CHAR(8) DEFAULT ' ' NOT NULL ENABLE,
UOM_CD CHAR(4) DEFAULT ' ' NOT NULL ENABLE,
SQI_CD CHAR(8) DEFAULT ' ' NOT NULL ENABLE,
RS_CD CHAR(8) DEFAULT ' ' NOT NULL ENABLE,
EFFDT DATE,
RC_SEQ NUMBER(4,0) DEFAULT 0 NOT NULL ENABLE,
DST_ID CHAR(10) DEFAULT ' ' NOT NULL ENABLE,
CURRENCY_CD CHAR(3) DEFAULT ' ' NOT NULL ENABLE,
CHAR_TYPE_CD CHAR(8) DEFAULT ' ' NOT NULL ENABLE,
CHAR_VAL CHAR(16) DEFAULT ' ' NOT NULL ENABLE,
PRT_SW CHAR(1) DEFAULT ' ' NOT NULL ENABLE,
APP_IN_SUMM_SW CHAR(1) DEFAULT ' ' NOT NULL ENABLE,
CALC_AMT NUMBER(15,2) DEFAULT 0 NOT NULL ENABLE,
EXEMPT_AMT NUMBER(15,2) DEFAULT 0 NOT NULL ENABLE,
BASE_AMT NUMBER(15,2) DEFAULT 0 NOT NULL ENABLE,
MSR_PEAK_QTY_SW CHAR(1) DEFAULT ' ' NOT NULL ENABLE,
VERSION NUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
DESCR_ON_BILL VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
BILL_SQ NUMBER(18,6) DEFAULT 0 NOT NULL ENABLE,
AUDIT_CALC_AMT NUMBER(18,5) DEFAULT 0 NOT NULL ENABLE,
CALC_GRP_CD VARCHAR2(30) DEFAULT ' ' NOT NULL ENABLE,
CALC_RULE_CD VARCHAR2(30) DEFAULT ' ' NOT NULL ENABLE,
CONSTRAINT CI_ADJ_CALC_LN_FK FOREIGN KEY(ADJ_ID) REFERENCES CI_ADJ ON
DELETE CASCADE
)
PARTITION BY REFERENCE (CI_ADJ_CALC_LN_FK)
ENABLE ROW MOVEMENT
/

```

## INDEX

```

CREATE UNIQUE INDEX XT310P0 ON CI_ADJ_CALC_LN ( ADJ_ID, SEQNO )
TABLESPACE CM_XT012_IND
GLOBAL PARTITION BY RANGE (ADJ_ID)
(
PARTITION P1 VALUES LESS THAN ( '124999999999' ),
PARTITION P2 VALUES LESS THAN ( '249999999999' ),
PARTITION P3 VALUES LESS THAN ( '374999999999' ),
PARTITION P4 VALUES LESS THAN ( '499999999999' ),
PARTITION P5 VALUES LESS THAN ( '624999999999' ),
PARTITION P6 VALUES LESS THAN ( '749999999999' ),
PARTITION P7 VALUES LESS THAN ( '874999999999' ),
PARTITION P8 VALUES LESS THAN ( MAXVALUE )
)
COMPRESS ADVANCED LOW
/

ALTER TABLE CI_ADJ_CALC_LN ADD CONSTRAINT XT310P0 PRIMARY KEY(ADJ_ID,
SEQNO) USING INDEX
/

```

## Child Table: CI\_ADJ\_CL\_CHAR

```

CREATE TABLE CI_ADJ_CL_CHAR
(
ADJ_ID CHAR(12) NOT NULL ENABLE,
SEQNO NUMBER(5,0) NOT NULL ENABLE,
CHAR_TYPE_CD CHAR(8) NOT NULL ENABLE,
VERSION NUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
CHAR_VAL CHAR(16) DEFAULT ' ' NOT NULL ENABLE,
ADHOC_CHAR_VAL VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,

```

```

        CHAR_VAL_FK1    VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
        CHAR_VAL_FK2    VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
        CHAR_VAL_FK3    VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
        CHAR_VAL_FK4    VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
        CHAR_VAL_FK5    VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
CONSTRAINT CI_ADJ_CL_CHAR_FK FOREIGN KEY(ADJ_ID) REFERENCES CI_ADJ ON
DELETE CASCADE
)
PARTITION BY REFERENCE (CI_ADJ_CL_CHAR_FK)
ENABLE ROW MOVEMENT
/

```

## INDEX

```

CREATE UNIQUE INDEX XT309P0 ON CI_ADJ_CL_CHAR ( ADJ_ID, SEQNO,
CHAR_TYPE_CD ) TABLESPACE CM_XT012_IND
GLOBAL PARTITION BY RANGE (ADJ_ID)
(
PARTITION P1 VALUES LESS THAN ( '124999999999' ),
PARTITION P2 VALUES LESS THAN ( '249999999999' ),
PARTITION P3 VALUES LESS THAN ( '374999999999' ),
PARTITION P4 VALUES LESS THAN ( '499999999999' ),
PARTITION P5 VALUES LESS THAN ( '624999999999' ),
PARTITION P6 VALUES LESS THAN ( '749999999999' ),
PARTITION P7 VALUES LESS THAN ( '874999999999' ),
PARTITION P8 VALUES LESS THAN ( MAXVALUE )
)
COMPRESS ADVANCED LOW
/

ALTER TABLE CI_ADJ_CL_CHAR ADD CONSTRAINT XT309P0 PRIMARY KEY(ADJ_ID,
SEQNO, CHAR_TYPE_CD) USING INDEX
/

```

## Child Table: CI\_ADJ\_CHAR

```

CREATE TABLE CI_ADJ_CHAR
(
    ADJ_ID          CHAR(12) NOT NULL ENABLE,
    CHAR_TYPE_CD   CHAR(8) NOT NULL ENABLE,
    SEQ_NUM        NUMBER(3,0) NOT NULL ENABLE,
    VERSION        NUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
    CHAR_VAL       CHAR(16) DEFAULT ' ' NOT NULL ENABLE,
    ADHOC_CHAR_VAL VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
    CHAR_VAL_FK1   VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
    CHAR_VAL_FK2   VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
    CHAR_VAL_FK3   VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
    CHAR_VAL_FK4   VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
    CHAR_VAL_FK5   VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
    SRCH_CHAR_VAL  VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
CONSTRAINT CI_ADJ_CHAR_FK FOREIGN KEY(ADJ_ID) REFERENCES CI_ADJ ON
DELETE CASCADE
)
PARTITION BY REFERENCE (CI_ADJ_CHAR_FK)
ENABLE ROW MOVEMENT
/

```

## INDEX



```
CREATE UNIQUE INDEX XC781P0 ON CI_ADJ_CHAR (ADJ_ID, CHAR_TYPE_CD,
SEQ_NUM) TABLESPACE CM_XT012_IND
GLOBAL PARTITION BY RANGE (ADJ_ID)
(
PARTITION PART1 VALUES LESS THAN ('124999999999'),
PARTITION PART2 VALUES LESS THAN ('249999999999'),
PARTITION PART3 VALUES LESS THAN ('374999999999'),
PARTITION PART4 VALUES LESS THAN ('499999999999'),
PARTITION PART5 VALUES LESS THAN ('624999999999'),
PARTITION PART6 VALUES LESS THAN ('749999999999'),
PARTITION PART7 VALUES LESS THAN ('874999999999'),
PARTITION PART8 VALUES LESS THAN (MAXVALUE)
)
COMPRESS ADVANCED LOW
/

ALTER TABLE CI_ADJ_CHAR ADD CONSTRAINT XC781P0 PRIMARY KEY (ADJ_ID,
CHAR_TYPE_CD, SEQ_NUM) USING INDEX;

CREATE INDEX XC781S1 ON CI_ADJ_CHAR (SRCH_CHAR_VAL)
GLOBAL PARTITION BY HASH (SRCH_CHAR_VAL)
(
PARTITION PART1 TABLESPACE CM_XT012_IND,
PARTITION PART2 TABLESPACE CM_XT012_IND,
PARTITION PART3 TABLESPACE CM_XT012_IND,
PARTITION PART4 TABLESPACE CM_XT012_IND,
PARTITION PART5 TABLESPACE CM_XT012_IND,
PARTITION PART6 TABLESPACE CM_XT012_IND,
PARTITION PART7 TABLESPACE CM_XT012_IND,
PARTITION PART8 TABLESPACE CM_XT012_IND
)
/
```

# Maintenance Object: Bill Segment

This section contains the sample SQL for the following tables:

- [Parent Table: CI\\_BSEG](#)
  - [Child Table: CI\\_BSEG\\_CALC](#)
  - [Child Table: CI\\_BSEG\\_CALC\\_LN](#)
    - [Child Table: CI\\_BSEG\\_CL\\_CHAR](#)
      - [Child Table: CI\\_BSEG\\_EXCP](#)
  - [Child Table: CI\\_BSEG\\_MSG](#)
  - [Child Table: CI\\_BSEG\\_READ](#)
  - [Child Table: CI\\_BSEG\\_SQ](#)
  - [Child Table: CI\\_BSEG\\_ITEM](#)

## Parent Table: CI\_BSEG

```

CREATE BIGFILE TABLESPACE CM_XT048_P2017JAN DATAFILE '+DATA' SIZE 100M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED
/
CREATE BIGFILE TABLESPACE CM_XT048_P2017FEB DATAFILE '+DATA' SIZE 100M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED
/
CREATE BIGFILE TABLESPACE CM_XT048_P2017MAR DATAFILE '+DATA' SIZE 100M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED
/
CREATE BIGFILE TABLESPACE CM_XT048_P2017APR DATAFILE '+DATA' SIZE 100M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED
/
CREATE BIGFILE TABLESPACE CM_XT048_P2017MAY DATAFILE '+DATA' SIZE 100M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED
/
CREATE BIGFILE TABLESPACE CM_XT048_P2017JUN DATAFILE '+DATA' SIZE 100M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED
/
CREATE BIGFILE TABLESPACE CM_XT048_P2017JUL DATAFILE '+DATA' SIZE 100M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED
/
CREATE BIGFILE TABLESPACE CM_XT048_P2017AUG DATAFILE '+DATA' SIZE 100M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED
/
CREATE BIGFILE TABLESPACE CM_XT048_P2017SEP DATAFILE '+DATA' SIZE 100M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED
/
CREATE BIGFILE TABLESPACE CM_XT048_P2017OCT DATAFILE '+DATA' SIZE 100M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED
/
CREATE BIGFILE TABLESPACE CM_XT048_P2017NOV DATAFILE '+DATA' SIZE 100M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED
/
CREATE BIGFILE TABLESPACE CM_XT048_P2017DEC DATAFILE '+DATA' SIZE 100M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED
/
CREATE BIGFILE TABLESPACE CM_XT048_PMAX DATAFILE '+DATA' SIZE 100M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED
/

```

```

CREATE TABLE CI_BSEG
( CHAR(12) NOTNULL ENABLE,
  BSEG_ID
  BILL_CYC_CDCHAR(4) DEFAULT ' ' NOT NULL ENABLE,
  WIN_START_DT DATE,
  CAN_RSN_CDCHAR(4) DEFAULT ' ' NOT NULL ENABLE,
  CAN_BSEG_IDCHAR(12) DEFAULT ' ' NOT NULL ENABLE,
  SA_IDCHAR(10) DEFAULT ' ' NOT NULL ENABLE,
  BILL_IDCHAR(12) DEFAULT ' ' NOT NULL ENABLE,
  START_DT DATE,
  END_DT DATE, CHAR(1) DEFAULT ' ' NOT NULL ENABLE,
  EST_SW
  CLOSING_BSEG_SWCHAR(1) DEFAULT ' ' NOT NULL ENABLE,
  SQ_OVERRIDE_SWCHAR(1) DEFAULT ' ' NOT NULL ENABLE,
  ITEM_OVERRIDE_SW CHAR(1) DEFAULT ' ' NOT NULL ENABLE,
  PREM_IDCHAR(10) DEFAULT ' ' NOT NULL ENABLE,
  BSEG_STAT_FLGCHAR(2) DEFAULT ' ' NOT NULL ENABLE,
  CRE_DTTM DATE,
  STAT_CHG_DTTM DATE,
  REBILL_SEG_IDCHAR(12) DEFAULT ' ' NOT NULL ENABLE,
  VERSIONNUMBER(5,0) DEFAULT 1 NOTNULL ENABLE,
  MASTER_BSEG_IDCHAR(12) DEFAULT ' ' NOT NULL ENABLE,
  QUOTE_DTL_IDCHAR(12) DEFAULT ' ' NOT NULL ENABLE,
  BILL_SCNR_IDCHAR(12) DEFAULT ' ' NOT NULL ENABLE,
  MDM_START_DTTM DATE,
  MDM_END_DTTM DATE,
  BSEG_DATA_AREA CLOB,
  ILM_DT DATE,
  ILM_ARCH_SW CHAR(1)
)
ENABLE ROW MOVEMENT
PARTITION BY RANGE (ILM_DT)
SUBPARTITION BY RANGE (BSEG_ID) SUBPARTITION TEMPLATE (
  SUBPARTITION S01 VALUES LESS THAN ( '124999999999' ),
  SUBPARTITION S02 VALUES LESS THAN ( '249999999999' ),
  SUBPARTITION S03 VALUES LESS THAN ( '374999999999' ),
  SUBPARTITION S04 VALUES LESS THAN ( '499999999999' ),
  SUBPARTITION S05 VALUES LESS THAN ( '624999999999' ),
  SUBPARTITION S06 VALUES LESS THAN ( '749999999999' ),
  SUBPARTITION S07 VALUES LESS THAN ( '874999999999' ),
  SUBPARTITION S08 VALUES LESS THAN ( MAXVALUE )
)

(
  PARTITION "P2017JAN" VALUES LESS THAN (TO_DATE('2017-02-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
  tablespace CM_XT048_P2017JAN,
  PARTITION "P2017FEB" VALUES LESS THAN (TO_DATE('2017-03-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
  tablespace CM_XT048_P2017FEB,
  PARTITION "P2017MAR" VALUES LESS THAN (TO_DATE('2017-04-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
  tablespace CM_XT048_P2017MAR,
  PARTITION "P2017APR" VALUES LESS THAN (TO_DATE('2017-05-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
  tablespace CM_XT048_P2017APR,
  PARTITION "P2017MAY" VALUES LESS THAN (TO_DATE('2017-06-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
  tablespace CM_XT048_P2017MAY,
  PARTITION "P2017JUN" VALUES LESS THAN (TO_DATE('2017-07-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
)

```

```

tablespace CM_XT048_P2017JUN,
PARTITION "P2017JUL" VALUES LESS THAN (TO_DATE('2017-08-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT048_P2017JUL,
PARTITION "P2017AUG" VALUES LESS THAN (TO_DATE('2017-09-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT048_P2017AUG,
PARTITION "P2017SEP" VALUES LESS THAN (TO_DATE('2017-10-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT048_P2017SEP,
PARTITION "P2017OCT" VALUES LESS THAN (TO_DATE('2017-11-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT048_P2017OCT,
PARTITION "P2017NOV" VALUES LESS THAN (TO_DATE('2017-12-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT048_P2017NOV,
PARTITION "P2017DEC" VALUES LESS THAN (TO_DATE('2018-01-01 00:00:01',
'SYYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN'))
tablespace CM_XT048_P2017DEC,
PARTITION "PMAX" VALUES LESS THAN (MAXVALUE)
tablespace CM_XT048_PMAX
)

/
CREATE BIGFILE TABLESPACE CM_XT048_IND DATAFILE '+DATA' SIZE 100M
AUTOEXTEND ON MAXSIZE UNLIMITED DEFAULT ROW STORE COMPRESS ADVANCED;

```

## INDEX

```

CREATE UNIQUE INDEX XT048P0 ON CI_BSEG ( BSEG_ID ) TABLESPACE
CM_XT048_IND
GLOBAL PARTITION BY RANGE (BSEG_ID)
(
PARTITION P1 VALUES LESS THAN ( '124999999999' ),
PARTITION P2 VALUES LESS THAN ( '249999999999' ),
PARTITION P3 VALUES LESS THAN ( '374999999999' ),
PARTITION P4 VALUES LESS THAN ( '499999999999' ),
PARTITION P5 VALUES LESS THAN ( '624999999999' ),
PARTITION P6 VALUES LESS THAN ( '749999999999' ),
PARTITION P7 VALUES LESS THAN ( '874999999999' ),
PARTITION P8 VALUES LESS THAN ( MAXVALUE )
)
/
ALTER TABLE CI_BSEG ADD CONSTRAINT XT048P0 PRIMARY KEY(BSEG_ID) USING
INDEX
/
CREATE INDEX XT048S1 ON CI_BSEG ( BILL_ID ) TABLESPACE CM_XT048_IND
/
CREATE INDEX XT048S2 ON CI_BSEG ( SA_ID ) TABLESPACE CM_XT048_IND
/
CREATE UNIQUE INDEX XT048S3 ON CI_BSEG ( QUOTE_DTL_ID, BSEG_ID
) TABLESPACE CM_XT048_IND COMPRESS ADVANCED LOW
/
CREATE UNIQUE INDEX XT048S4 ON CI_BSEG ( ILM_DT, ILM_ARCH_SW, BSEG_ID )
TABLESPACE CM_XT048_IND COMPRESS ADVANCED LOW
/

```

## Child Table: CI\_BSEG\_CALC

```

CREATE TABLE CI_BSEG_CALC
(
BSEG_ID      CHAR(12) NOT NULL ENABLE,

```

```

HEADER_SEQ NUMBER(3,0) NOT NULL ENABLE,
START_DT DATE NOT NULL ENABLE,
CURRENCY_CD CHAR(3) DEFAULT ' ' NOT NULL ENABLE,
END_DT DATE NOT NULL ENABLE,
RS_CD CHAR(8) DEFAULT ' ' NOT NULL ENABLE,
EFFDT DATE,
BILLABLE_CHG_ID CHAR(12) DEFAULT ' ' NOT NULL ENABLE,
CALC_AMT          NUMBER(15,2) DEFAULT 0 NOT NULL ENABLE,
DESCR_ON_BILL    VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
VERSION          NUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
CONSTRAINT CI_BSEG_CALC_FK FOREIGN KEY(BSEG_ID) REFERENCES CI_BSEG ON
DELETE CASCADE
)
PARTITION BY REFERENCE (CI_BSEG_CALC_FK)
ENABLE ROW MOVEMENT
/

```

## INDEX

```

CREATE UNIQUE INDEX XT072P0 ON CI_BSEG_CALC ( BSEG_ID, HEADER_SEQ )
TABLESPACE CM_XT048_IND
GLOBAL PARTITION BY RANGE (BSEG_ID)
(
PARTITION P1 VALUES LESS THAN ( '124999999999' ),
PARTITION P2 VALUES LESS THAN ( '249999999999' ),
PARTITION P3 VALUES LESS THAN ( '374999999999' ),
PARTITION P4 VALUES LESS THAN ( '499999999999' ),
PARTITION P5 VALUES LESS THAN ( '624999999999' ),
PARTITION P6 VALUES LESS THAN ( '749999999999' ),
PARTITION P7 VALUES LESS THAN ( '874999999999' ),
PARTITION P8 VALUES LESS THAN ( MAXVALUE )
)
COMPRESS ADVANCED LOW
/

ALTER TABLE CI_BSEG_CALC ADD CONSTRAINT XT072P0 PRIMARY KEY(BSEG_ID,
HEADER_SEQ) USING INDEX
/

CREATE INDEX XT072S1 ON CI_BSEG_CALC ( BILLABLE_CHG_ID, BSEG_ID )
TABLESPACE CM_XT048_IND COMPRESS ADVANCED LOW
/

```

## Child Table: CI\_BSEG\_CALC\_LN

```

CREATE TABLE CI_BSEG_CALC_LN
(
BSEG_ID          CHAR(12) NOT NULL ENABLE,
HEADER_SEQ      NUMBER(3,0) NOT NULL ENABLE,
SEQNO           NUMBER(5,0) NOT NULL ENABLE,
CHAR_TYPE_CD    CHAR(8) DEFAULT ' ' NOT NULL ENABLE,
CURRENCY_CD     CHAR(3) DEFAULT ' ' NOT NULL ENABLE,
CHAR_VAL        CHAR(16) DEFAULT ' ' NOT NULL ENABLE,
DST_ID          CHAR(10) DEFAULT ' ' NOT NULL ENABLE,
UOM_CD          CHAR(4) DEFAULT ' ' NOT NULL ENABLE,
TOU_CD          CHAR(8) DEFAULT ' ' NOT NULL ENABLE,
RC_SEQ          NUMBER(4,0) DEFAULT 0 NOT NULL ENABLE,
PRT_SW          CHAR(1) DEFAULT ' ' NOT NULL ENABLE,
APP_IN_SUMM_SW CHAR(1) DEFAULT ' ' NOT NULL ENABLE,
CALC_AMT        NUMBER(15,2) DEFAULT 0 NOT NULL ENABLE,
EXEMPT_AMT      NUMBER(15,2) DEFAULT 0 NOT NULL ENABLE,
BASE_AMT        NUMBER(15,2) DEFAULT 0 NOT NULL ENABLE,
SQI_CD          CHAR(8) DEFAULT ' ' NOT NULL ENABLE,

```

```

        BILL_SQ          NUMBER(18,6) DEFAULT 0 NOT NULL ENABLE,
        MSR_PEAK_QTY_SW CHAR(1)  DEFAULT ' ' NOT NULL ENABLE,
        DESCR_ON_BILL   VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
        VERSION         NUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
        AUDIT_CALC_AMT  NUMBER(18,5) DEFAULT 0 NOT NULL ENABLE,
        CALC_GRP_CD     VARCHAR2(30) DEFAULT ' ' NOT NULL ENABLE,
        CALC_RULE_CD    VARCHAR2(30) DEFAULT ' ' NOT NULL ENABLE,
        CONSTRAINT CI_BSEG_CALC_LN_FK FOREIGN KEY(BSEG_ID) REFERENCES CI_BSEG
        ON DELETE CASCADE
    )
    PARTITION BY REFERENCE (CI_BSEG_CALC_LN_FK)
    ENABLE ROW MOVEMENT
/

```

## INDEX

```

CREATE UNIQUE INDEX XT050P0 ON CM_BSEG_CALC_LN ( BSEG_ID,
HEADER_SEQ,SEQNO) TABLESPACE CM_XT048_IND
GLOBAL PARTITION BY RANGE (BSEG_ID)
(
PARTITION P1 VALUES LESS THAN ( '124999999999' ),
PARTITION P2 VALUES LESS THAN ( '249999999999' ),
PARTITION P3 VALUES LESS THAN ( '374999999999' ),
PARTITION P4 VALUES LESS THAN ( '499999999999' ),
PARTITION P5 VALUES LESS THAN ( '624999999999' ),
PARTITION P6 VALUES LESS THAN ( '749999999999' ),
PARTITION P7 VALUES LESS THAN ( '874999999999' ),
PARTITION P8 VALUES LESS THAN ( MAXVALUE )
)
COMPRESS ADVANCED LOW
/

ALTER TABLE CI_BSEG_CALC_LN ADD CONSTRAINT XT050P0 PRIMARY
KEY(BSEG_ID, HEADER_SEQ,SEQNO) USING INDEX
/

```

## Child Table: CI\_BSEG\_CL\_CHAR

```

CREATE TABLE CI_BSEG_CL_CHAR
(
    BSEG_ID          CHAR(12) NOT NULL ENABLE,
    HEADER_SEQ      NUMBER(3,0) NOT NULL ENABLE,
    SEQNO           NUMBER(5,0) NOT NULL ENABLE,
    CHAR_TYPE_CD    CHAR(8) NOT NULL ENABLE,
    CHAR_VAL        CHAR(16) DEFAULT ' ' NOT NULL ENABLE,
    ADHOC_CHAR_VAL VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
    CHAR_VAL_FK1    VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
    CHAR_VAL_FK2    VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
    CHAR_VAL_FK3    VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
    CHAR_VAL_FK4    VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
    CHAR_VAL_FK5    VARCHAR2(50) DEFAULT ' ' NOT NULL ENABLE,
    VERSION         NUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
    CONSTRAINT CI_BSEG_CL_CHAR_FK FOREIGN KEY(BSEG_ID) REFERENCES CI_BSEG
    ON DELETE CASCADE
)
PARTITION BY REFERENCE (CI_BSEG_CL_CHAR_FK)
ENABLE ROW MOVEMENT
/

```

**INDEX**

```

CREATE UNIQUE INDEX XT056P0 ON CI_BSEG_CL_CHAR ( BSEG_ID, HEADER_SEQ,
SEQNO, CHAR_TYPE_CD ) TABLESPACE CM_XT048_IND
GLOBAL PARTITION BY RANGE (BSEG_ID)
(
PARTITION P1 VALUES LESS THAN ( '124999999999' ),
PARTITION P2 VALUES LESS THAN ( '249999999999' ),
PARTITION P3 VALUES LESS THAN ( '374999999999' ),
PARTITION P4 VALUES LESS THAN ( '499999999999' ),
PARTITION P5 VALUES LESS THAN ( '624999999999' ),
PARTITION P6 VALUES LESS THAN ( '749999999999' ),
PARTITION P7 VALUES LESS THAN ( '874999999999' ),
PARTITION P8 VALUES LESS THAN ( MAXVALUE )
)
COMPRESS ADVANCED LOW
/

ALTER TABLE CI_BSEG_CL_CHAR ADD CONSTRAINT XT056P0 PRIMARY
KEY(BSEG_ID, HEADER_SEQ, SEQNO, CHAR_TYPE_CD) USING INDEX
/

```

**Child Table: CI\_BSEG\_EXCP**

```

CREATE TABLE CI_BSEG_EXCP
(
    BSEG_ID          CHAR(12) NOT NULL ENABLE,
    MESSAGE_CAT_NBR NUMBER(5,0) DEFAULT 0 NOT NULL ENABLE,
    MESSAGE_NBR     NUMBER(5,0) DEFAULT 0 NOT NULL ENABLE,
    BSEG_EXCP_FLG   CHAR(2) DEFAULT ' ' NOT NULL ENABLE,
    EXP_MSG         VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
    MESSAGE_PARM1   VARCHAR2(2000) DEFAULT ' ' NOT NULL ENABLE,
    MESSAGE_PARM2   VARCHAR2(2000) DEFAULT ' ' NOT NULL ENABLE,
    MESSAGE_PARM3   VARCHAR2(2000) DEFAULT ' ' NOT NULL ENABLE,
    MESSAGE_PARM4   VARCHAR2(2000) DEFAULT ' ' NOT NULL ENABLE,
    MESSAGE_PARM5   VARCHAR2(2000) DEFAULT ' ' NOT NULL ENABLE,
    MESSAGE_PARM6   VARCHAR2(2000) DEFAULT ' ' NOT NULL ENABLE,
    MESSAGE_PARM7   VARCHAR2(2000) DEFAULT ' ' NOT NULL ENABLE,
    MESSAGE_PARM8   VARCHAR2(2000) DEFAULT ' ' NOT NULL ENABLE,
    MESSAGE_PARM9   VARCHAR2(2000) DEFAULT ' ' NOT NULL ENABLE,
    CALL_SEQ        VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
    USER_ID         CHAR(8) DEFAULT ' ' NOT NULL ENABLE,
    CRE_DTTM        DATE,
    REVIEW_COMP     CHAR(1) DEFAULT ' ' NOT NULL ENABLE,
    REVIEW_USER_ID CHAR(8) DEFAULT ' ' NOT NULL ENABLE,
    REVIEW_DT       DATE,
    COMMENTS        VARCHAR2(254) DEFAULT ' ' NOT NULL ENABLE,
    VERSION         NUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
    CONSTRAINT CI_BSEG_EXCP_FK FOREIGN KEY(BSEG_ID) REFERENCES CI_BSEG
ON DELETE CASCADE
)
PARTITION BY REFERENCE (CI_BSEG_EXCP_FK)
ENABLE ROW MOVEMENT
/

```

**INDEX**

```

CREATE UNIQUE INDEX XT051P0 ON CI_BSEG_EXCP ( BSEG_ID ) TABLESPACE
CM_XT048_IND
GLOBAL PARTITION BY RANGE (BSEG_ID)

```

```
(
PARTITION P1 VALUES LESS THAN ( '124999999999' ),
PARTITION P2 VALUES LESS THAN ( '249999999999' ),
PARTITION P3 VALUES LESS THAN ( '374999999999' ),
PARTITION P4 VALUES LESS THAN ( '499999999999' ),
PARTITION P5 VALUES LESS THAN ( '624999999999' ),
PARTITION P6 VALUES LESS THAN ( '749999999999' ),
PARTITION P7 VALUES LESS THAN ( '874999999999' ),
PARTITION P8 VALUES LESS THAN ( MAXVALUE )
)
COMPRESS ADVANCED LOW
/

ALTER TABLE CI_BSEG_EXCP ADD CONSTRAINT XT051P0 PRIMARY KEY(BSEG_ID)
USING INDEX
/
```

### Child Table: CI\_BSEG\_MSG

```
CREATE TABLE CI_BSEG_MSG
(
    BSEG_ID          CHAR(12) NOT NULL ENABLE,
    BILL_MSG_CD     CHAR(4) NOT NULL ENABLE,
    VERSION         NUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
    CONSTRAINT CI_BSEG_MSG_FK FOREIGN KEY(BSEG_ID) REFERENCES CI_BSEG ON
DELETE CASCADE
)
PARTITION BY REFERENCE (CI_BSEG_MSG_FK)
ENABLE ROW MOVEMENT
/
```

### INDEX

```
CREATE UNIQUE INDEX XT080P0 ON CI_BSEG_MSG ( BSEG_ID, BILL_MSG_CD )
TABLESPACE CM_XT048_IND
GLOBAL PARTITION BY RANGE (BSEG_ID)
(
PARTITION P1 VALUES LESS THAN ( '124999999999' ),
PARTITION P2 VALUES LESS THAN ( '249999999999' ),
PARTITION P3 VALUES LESS THAN ( '374999999999' ),
PARTITION P4 VALUES LESS THAN ( '499999999999' ),
PARTITION P5 VALUES LESS THAN ( '624999999999' ),
PARTITION P6 VALUES LESS THAN ( '749999999999' ),
PARTITION P7 VALUES LESS THAN ( '874999999999' ),
PARTITION P8 VALUES LESS THAN ( MAXVALUE )
)
COMPRESS ADVANCED LOW
/

ALTER TABLE CI_BSEG_MSG ADD CONSTRAINT XT080P0 PRIMARY KEY(BSEG_ID,
BILL_MSG_CD) USING INDEX
/
```

### Child Table: CI\_BSEG\_READ

```
CREATE TABLE CI_BSEG_READ
(
    BSEG_ID          CHAR(12) NOT NULL ENABLE,
    SP_ID           CHAR(10) NOT NULL ENABLE,
    REG_CONST       NUMBER(12,6) DEFAULT 0 NOT NULL ENABLE,
```



```

        SEQNO                NUMBER(5,0) NOT NULL ENABLE,
        USAGE_FLG            CHAR(2) DEFAULT ' ' NOT NULL ENABLE,
        USE_PCT              NUMBER(3,0) DEFAULT 0 NOT NULL ENABLE,
        HOW_TO_USE_FLG       CHAR(2) DEFAULT ' ' NOT NULL ENABLE,
        MSR_PEAK_QTY_SW      CHAR(1) DEFAULT ' ' NOT NULL ENABLE,
        UOM_CD               CHAR(4) DEFAULT ' ' NOT NULL ENABLE,
        TOU_CD               CHAR(8) DEFAULT ' ' NOT NULL ENABLE,
        START_REG_READ_ID    CHAR(12) DEFAULT ' ' NOT NULL ENABLE,
        START_READ_DTTM      DATE NOT NULL ENABLE,
        START_REG_READING    NUMBER(15,6) DEFAULT 0 NOT NULL ENABLE,
        END_REG_READ_ID      CHAR(12) DEFAULT ' ' NOT NULL ENABLE,
        END_READ_DTTM        DATE NOT NULL ENABLE,
        END_REG_READING      NUMBER(15,6) DEFAULT 0 NOT NULL ENABLE,
        MSR_QTY              NUMBER(18,6) DEFAULT 0 NOT NULL ENABLE,
        FINAL_UOM_CD         CHAR(4) DEFAULT ' ' NOT NULL ENABLE,
        FINAL_TOU_CD         CHAR(8) DEFAULT ' ' NOT NULL ENABLE,
        FINAL_REG_QTY        NUMBER(18,6) DEFAULT 0 NOT NULL ENABLE,
        VERSION              NUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
        SQI_CD               CHAR(8) DEFAULT ' ' NOT NULL ENABLE,
        FINAL_SQI_CD         CHAR(8) DEFAULT ' ' NOT NULL ENABLE,
        CONSTRAINT CI_BSEG_READ_FK FOREIGN KEY (BSEG_ID) REFERENCES CI_BSEG ON
        DELETE CASCADE
    )
    PARTITION BY REFERENCE (CI_BSEG_READ_FK)
    ENABLE ROW MOVEMENT
/

```

## INDEX

```

CREATE UNIQUE INDEX XT054P0 ON CI_BSEG_READ ( BSEG_ID, SP_ID, SEQNO )
TABLESPACE CM_XT048_IND
GLOBAL PARTITION BY RANGE (BSEG_ID)
(
    PARTITION P1 VALUES LESS THAN ( '124999999999' ),
    PARTITION P2 VALUES LESS THAN ( '249999999999' ),
    PARTITION P3 VALUES LESS THAN ( '374999999999' ),
    PARTITION P4 VALUES LESS THAN ( '499999999999' ),
    PARTITION P5 VALUES LESS THAN ( '624999999999' ),
    PARTITION P6 VALUES LESS THAN ( '749999999999' ),
    PARTITION P7 VALUES LESS THAN ( '874999999999' ),
    PARTITION P8 VALUES LESS THAN ( MAXVALUE )
)
COMPRESS ADVANCED LOW
/

ALTER TABLE CI_BSEG_READ ADD CONSTRAINT XT054P0 PRIMARY KEY(BSEG_ID,
SP_ID, SEQNO) USING INDEX
/
CREATE INDEX XT054S1 ON CI_BSEG_READ ( SP_ID ) TABLESPACE CM_XT048_IND
/
CREATE INDEX XT054S2 ON CI_BSEG_READ ( START_REG_READ_ID ) TABLESPACE
CM_XT048_IND
/
CREATE INDEX XT054S3 ON CI_BSEG_READ ( END_REG_READ_ID ) TABLESPACE
CM_XT048_IND
/

```

## Child Table: CI\_BSEG\_SQ

```

CREATE TABLE CI_BSEG_SQ
(

```

```

        BSEG_ID CHAR(12) NOT NULL ENABLE,
        UOM_CD  CHAR(4) NOT NULL ENABLE,
        TOU_CD  CHAR(8) NOT NULL ENABLE,
        SQI_CD  CHAR(8) NOT NULL ENABLE,
        INIT_SQ NUMBER(18,6) DEFAULT 0 NOT NULL ENABLE,
        BILL_SQ NUMBER(18,6) DEFAULT 0 NOT NULL ENABLE,
        VERSION NUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
        CONSTRAINT CI_BSEG_SQ_FK FOREIGN KEY(BSEG_ID) REFERENCES CI_BSEG ON
        DELETE CASCADE
    )
    PARTITION BY REFERENCE (CI_BSEG_SQ_FK)
    ENABLE ROW MOVEMENT
/

```

## INDEX

```

CREATE UNIQUE INDEX XT055P0 ON CI_BSEG_SQ ( BSEG_ID, UOM_CD, TOU_CD,
SQI_CD ) TABLESPACE CM_XT048_IND
GLOBAL PARTITION BY RANGE (BSEG_ID)
(
PARTITION P1 VALUES LESS THAN ( '124999999999' ),
PARTITION P2 VALUES LESS THAN ( '249999999999' ),
PARTITION P3 VALUES LESS THAN ( '374999999999' ),
PARTITION P4 VALUES LESS THAN ( '499999999999' ),
PARTITION P5 VALUES LESS THAN ( '624999999999' ),
PARTITION P6 VALUES LESS THAN ( '749999999999' ),
PARTITION P7 VALUES LESS THAN ( '874999999999' ),
PARTITION P8 VALUES LESS THAN ( MAXVALUE )
)
COMPRESS ADVANCED LOW
/
ALTER TABLE CI_BSEG_SQ ADD CONSTRAINT XT055P0 PRIMARY KEY(BSEG_ID,
UOM_CD, TOU_CD, SQI_CD) USING INDEX
/

```

## Child Table: CI\_BSEG\_ITEM

```

CREATE TABLE CI_BSEG_ITEM
(
    BSEG_ID      CHAR(12) NOT NULL ENABLE,
    SEQNO        NUMBER(5,0) NOT NULL ENABLE,
    ITEM_TYPE_CD VARCHAR(30) DEFAULT ' ' NOT NULL ENABLE,
    ITEM_ID      CHAR(10) DEFAULT ' ' NOT NULL ENABLE,
    START_DT     DATE NOT NULL ENABLE,
    END_DT       DATE NOT NULL ENABLE,
    ITEM_CNT     NUMBER(11,2) DEFAULT 0 NOT NULL ENABLE,
    UOM_CD       CHAR(4) DEFAULT ' ' NOT NULL ENABLE,
    SVC_QTY      NUMBER(18,6) DEFAULT 0 NOT NULL ENABLE,
    VERSION      NUMBER(5,0) DEFAULT 1 NOT NULL ENABLE,
    CONSTRAINT CI_BSEG_ITEM_FK FOREIGN KEY(BSEG_ID) REFERENCES CI_BSEG ON
    DELETE CASCADE
)
PARTITION BY REFERENCE (CI_BSEG_ITEM_FK)
ENABLE ROW MOVEMENT
/

```

## INDEX

```

CREATE UNIQUE INDEX XT053P0 ON CI_BSEG_ITEM ( BSEG_ID, SEQNO )
TABLESPACE CM_XT048_IND
GLOBAL PARTITION BY RANGE (BSEG_ID)

```

```
(
PARTITION P1 VALUES LESS THAN ( '124999999999' ),
PARTITION P2 VALUES LESS THAN ( '249999999999' ),
PARTITION P3 VALUES LESS THAN ( '374999999999' ),
PARTITION P4 VALUES LESS THAN ( '499999999999' ),
PARTITION P5 VALUES LESS THAN ( '624999999999' ),
PARTITION P6 VALUES LESS THAN ( '749999999999' ),
PARTITION P7 VALUES LESS THAN ( '874999999999' ),
PARTITION P8 VALUES LESS THAN ( MAXVALUE )
)
COMPRESS ADVANCED LOW
/
ALTER TABLE CI_BSEG_ITEM ADD CONSTRAINT XT053P0 PRIMARY KEY(BSEG_ID,
SEQNO) USING INDEX
/
```

# Appendix E

---

## Sample Scripts for Customer Contact Enhancement

In this release of Oracle Utilities Customer Care and Billing, there are enhancements that change the behavior of some objects. Upgrading customers may wish to update existing data to align with how newly created data will behave.

The following sample scripts are provided to help upgrading clients. Customers are advised to review, edit, and test these sample script to ensure they meet business and data requirement.

All scripts are delivered with logic to run in threads. In the format that the script is delivered, these scripts will not process any records. The scripts must be edited to set specific key ranges so that it can be run in parallel or process all records.

This appendix consists of the following:

- [Updating Customer Contact Account and Premise](#)
- [Updating Preferred Contact Method on Legacy Values](#)

# Updating Customer Contact Account and Premise

In this release of Oracle Utilities Customer Care and Billing, the customer contact capability has been enhanced so that customer contacts can be linked to a person, account and/or premise. This section contains sample SQL that upgrading implementations can use to update the account ID and premise ID fields on existing customer contacts.

All Oracle Utilities Customer Care and Billing system processes that create customer contacts have been enhanced to populate account and/or premise. Not all of these areas retain a link to the customer contact created and the SQL provided is just a sample.

These scripts update Customer Contact Account and Premise from the following sources:

- Customer Contact Characteristics
- Collection Events
- Severance Events
- Write off Events
- Overdue Process Logs

The other Oracle Utilities Customer Care and Billing process enhanced are algorithm types delivered for the below plug-in spots. Examine your organization's customer contacts to determine if you should update customer contacts created from the following:

- FA Remark Algorithm
- Meter read Remark Algorithm
- Case Type Enter Status Algorithm
- Customer Class Order Completion
- SA Type SA Stop
- SA Type - SA Activation
- Service Credit Membership Type - Membership Activation
- Service Credit Membership Type - Membership Creation
- Campaign - Order Completion
- Lead Event Type (BO) - Lead Event Completion
- Notification Type (BO) - Create Notification

Since existing customer contact records are all person-based, all account updates should occur before premise updates to ensure the premise is associated with the account.

These are intended to be run in the following order:

1. Update Account ID from characteristic.

Note the following about this SQL:

- This cannot handle two characteristic types that are both linked to Acct FK Ref with different char values. If this exists such as FROM\_ACCT and TO\_ACCT with different values, this will not update.
- Limited to accounts linked to CC person to not violate new CC validations.

- Change FK Ref if your implementation has introduced new FK Ref values for ACCT.

```

UPDATE CI_CC X
SET X.ACCT_ID =
  (SELECT DISTINCT(a.CHAR_VAL_FK1)
   FROM CI_CC_CHAR A,
        CI_CHAR_TYPE B,
        CI_CC C
   WHERE a.CHAR_TYPE_CD = B.CHAR_TYPE_CD
        AND A.CC_ID      = C.CC_ID
        AND B.FK_REF_CD  <> ' '
        AND b.fk_ref_cd  = 'ACCT'
        AND a.CC_ID      = X.CC_ID
        AND EXISTS
          (SELECT 'x'
           FROM CI_ACCT_PER D
           WHERE D.PER_ID = C.PER_ID
                AND D.ACCT_ID = a.CHAR_VAL_FK1
          )
  )
WHERE CC_ID =
  (SELECT A.CC_ID
   FROM CI_CC_CHAR A,
        CI_CHAR_TYPE B,
        CI_CC C
   WHERE a.CHAR_TYPE_CD = B.CHAR_TYPE_CD
        AND A.CC_ID      = C.CC_ID
        AND B.FK_REF_CD  <> ' '
        AND b.fk_ref_cd  = 'ACCT'
        AND a.CC_ID      = X.CC_ID
        AND EXISTS
          (SELECT 'x'
           FROM CI_ACCT_PER D
           WHERE D.PER_ID = C.PER_ID
                AND D.ACCT_ID = a.CHAR_VAL_FK1
          )
  )
AND 1 =
  (SELECT COUNT (DISTINCT a.CHAR_VAL_FK1)
   FROM CI_CC_CHAR A,
        CI_CHAR_TYPE B,
        CI_CC C
   WHERE a.CHAR_TYPE_CD = B.CHAR_TYPE_CD
        AND A.CC_ID      = C.CC_ID
        AND B.FK_REF_CD  <> ' '
        AND b.fk_ref_cd  = 'ACCT'
        AND a.CC_ID      = X.CC_ID
  )
AND X.ACCT_ID IS NULL
--AND X.CC_ID BETWEEN '0000000000' AND '9999999999';
AND X.CC_ID BETWEEN '0000000000' AND '0000000000';

```

## 2. Update Account ID from Coll event.

```

UPDATE CI_CC X
SET X.ACCT_ID =
  (SELECT a.acct_id
   FROM CI_COLL_PROC A,
        CI_COLL_EVT_CC C
   WHERE a.coll_proc_id = c.coll_proc_ID
        AND c.cc_id      = x.cc_id
  )

```

```

)
WHERE X.CC_ID IN
  (SELECT CC_ID FROM CI_COLL_EVT_CC
  )
AND X.ACCT_ID IS NULL
--AND X.CC_ID BETWEEN '0000000000' AND '9999999999';
AND X.CC_ID BETWEEN '0000000000' AND '0000000000';

```

### 3. Update Account ID from Sev event.

```

UPDATE CI_CC X
SET X.ACCT_ID =
  (SELECT a.acct_id
  FROM CI_SA A,
  CI_SEV_PROC B,
  CI_SEV_EVT_CC C
  WHERE a.SA_ID = B.SA_ID
  AND B.sev_proc_id = c.sev_proc_id
  AND c.cc_id = x.cc_id
  )
WHERE X.CC_ID IN
  (SELECT CC_ID FROM CI_SEV_EVT_CC
  )
AND X.ACCT_ID IS NULL
--AND X.CC_ID BETWEEN '0000000000' AND '9999999999';
AND X.CC_ID BETWEEN '0000000000' AND '0000000000';

```

### 4. Update Premise ID from Sev event.

Using premise linked to SP linked to FA linked to same Sev Proc First.

```

UPDATE CI_CC X
SET X.PREM_ID =
  (SELECT DISTINCT h.prem_id
  FROM CI_SEV_EVT_CC D,
  CI_SEV_EVT_FA E,
  CI_FA G,
  CI_SP H
  WHERE D.SEV_PROC_ID = E.SEV_PROC_ID
  AND e.fa_id = g.fa_id
  AND g.sp_id = h.sp_id
  AND d.cc_id = x.cc_id
  )
WHERE X.CC_ID IN
  (SELECT CC_ID
  FROM CI_SEV_EVT_CC D,
  CI_SEV_EVT_FA E
  WHERE D.SEV_PROC_ID = E.SEV_PROC_ID
  )
AND X.PREM_ID IS NULL
--AND X.CC_ID BETWEEN '0000000000' AND '9999999999';
AND X.CC_ID BETWEEN '0000000000' AND '0000000000';

```

### 5. Update Premise ID from Sev event.

Using premise linked to SA via Char Premise second.

**Note:** There is no SQL that will try to find a premise via SASP. The likelihood of more than one premise is too high.

```

UPDATE CI_CC X
SET X.PREM_ID =
  (SELECT NVL(a.char_prem_id, NULL)

```

```

FROM CI_SA A,
     CI_SEV_PROC B,
     CI_SEV_EVT_CC C
WHERE a.SA_ID      = B.SA_ID
AND B.sev_proc_id = c.sev_proc_id
AND A.CHAR_PREM_ID <> ' '
AND c.cc_id       = x.cc_id
)
WHERE X.CC_ID IN
      (SELECT CC_ID FROM CI_SEV_EVT_CC
      )
AND X.PREM_ID IS NULL
--AND X.CC_ID BETWEEN '0000000000' AND '9999999999';
AND X.CC_ID BETWEEN '0000000000' AND '0000000000';

```

6. Update Account ID from WO event.

```

UPDATE CI_CC X
SET X.ACCT_ID =
      (SELECT a.acct_id
      FROM CI_WO_PROC A,
           CI_WO_EVT_CC C
      WHERE a.wo_proc_id = c.wo_proc_ID
      AND c.cc_id       = x.cc_id
      )
WHERE X.CC_ID IN
      (SELECT CC_ID FROM CI_WO_EVT_CC
      )
AND X.ACCT_ID IS NULL
--AND X.CC_ID BETWEEN '0000000000' AND '9999999999';
AND X.CC_ID BETWEEN '0000000000' AND '0000000000';

```

7. Update Account ID from Overdue and Cut Processes via the Overdue Process Logs.

**NOTE:** You must hardcode the Char Type Code your implementation has introduced.

```

UPDATE CI_CC X
SET X.ACCT_ID =
      (SELECT b.acct_id
      FROM CI_OD_PROC_LOG A,
           CI_OD_PROC B
      WHERE a.char_type_cd = 'CCID'
      AND a.OD_PROC_ID     = B.OD_PROC_ID
      AND trim(a.char_val_fk1) = x.cc_id
      )
WHERE X.CC_ID IN
      (SELECT a.char_val_fk1
      FROM CI_OD_PROC_LOG A,
           CI_OD_PROC B
      WHERE a.char_type_cd = 'CCID'
      AND a.OD_PROC_ID     = B.OD_PROC_ID
      )
AND X.ACCT_ID IS NULL
--AND X.CC_ID BETWEEN '0000000000' AND '9999999999';
AND X.CC_ID BETWEEN '0000000000' AND '0000000000';

```

8. Update Premise ID from CC Char.

Some notes about this SQL:



- This cannot handle two characteristic types that are both linked to Prem FK Ref with different char values. If this exists such as OLD\_PREM and NEW\_PREM with different values, this will not update.
- Limited to premise associated with account if acct is populated on the CC to not violate new CC validations.
- Change FK Ref if your implementation has introduced new FK Ref values for PREM.

```

UPDATE CI_CC X
SET X.PREM_ID =
  (SELECT DISTINCT(a.CHAR_VAL_FK1)
   FROM CI_CC_CHAR A,
        CI_CHAR_TYPE B,
        CI_CC C
   WHERE a.CHAR_TYPE_CD = B.CHAR_TYPE_CD
        AND A.CC_ID      = C.CC_ID
        AND B.FK_REF_CD  <> ' '
        AND b.fk_ref_cd  = 'PREM'
        AND a.CC_ID      = X.CC_ID
        AND (C.ACCT_ID   IS NULL
             OR C.ACCT_ID IS NOT NULL)
        AND a.CHAR_VAL_FK1 IN
          (SELECT E.char_prem_id FROM CI_SA E WHERE E.ACCT_ID = C.ACCT_ID
           UNION
           SELECT H.PREM_ID
            FROM CI_SA F,
                 CI_SA_SP G,
                 CI_SP H
            WHERE f.ACCT_ID = C.ACCT_ID
                  AND F.SA_ID = G.SA_ID
                  AND G.SP_ID = H.SP_ID
           ) )
)
WHERE CC_ID =
  (SELECT A.CC_ID
   FROM CI_CC_CHAR A,
        CI_CHAR_TYPE B,
        CI_CC C
   WHERE a.CHAR_TYPE_CD = B.CHAR_TYPE_CD
        AND A.CC_ID      = C.CC_ID
        AND B.FK_REF_CD  <> ' '
        AND b.fk_ref_cd  = 'PREM'
        AND a.CC_ID      = X.CC_ID
        AND (C.ACCT_ID   IS NULL
             OR C.ACCT_ID IS NOT NULL)
        AND a.CHAR_VAL_FK1 IN
          (SELECT E.char_prem_id FROM CI_SA E WHERE E.ACCT_ID = C.ACCT_ID
           UNION
           SELECT H.PREM_ID
            FROM CI_SA F,
                 CI_SA_SP G,
                 CI_SP H
            WHERE f.ACCT_ID = C.ACCT_ID
                  AND F.SA_ID = G.SA_ID
                  AND G.SP_ID = H.SP_ID
           ) )
)
AND 1 =
  (SELECT COUNT (DISTINCT a.CHAR_VAL_FK1)
   FROM CI_CC_CHAR A,

```

```

        CI_CHAR_TYPE B,
        CI_CC C
WHERE a.CHAR_TYPE_CD = B.CHAR_TYPE_CD
AND A.CC_ID          = C.CC_ID
AND B.FK_REF_CD     <> ' '
AND b.fk_ref_cd     = 'PREM'
AND a.CC_ID         = X.CC_ID
)
AND X.PREM_ID IS NULL
--AND X.CC_ID BETWEEN '0000000000' AND '9999999999';
AND X.CC_ID BETWEEN '0000000000' AND '0000000000';

```

## Updating Preferred Contact Method on Legacy Values

In this release of Oracle Utilities Customer Care and Billing, a feature is introduced that some system processes use to determine if person phone and email or person contacts is being used.

If moving to using person contacts, some contact method values on case and customer contact are suppressed and existing records show as <invalid value>.

These scripts update the preferred contact method on cases and customer contacts from legacy values to person contact.

### 1. Update Case Preferred Contact Method from Email to Primary Email Person Contact:

```

UPDATE CI_CASE X
SET X.CONTACT_METH_FLG = 'C1PC',
    X.C1_CONTACT_ID     =
    (SELECT B.C1_CONTACT_ID
     FROM CI_CASE A,
          CISADM.C1_PER_CONTDDET B,
          CISADM.C1_COMM_RTE_TYPE C
     WHERE CONTACT_METH_FLG = 'EM'
     AND A.CONTACT_PER_ID   = B.PER_ID
     AND B.COMM_RTE_TYPE_CD = C.COMM_RTE_TYPE_CD
     AND B.CND_PRIMARY_FLG = 'C1YS'
     AND C.COMM_RTE_METH_FLG = 'EMAIL'
     AND X.CASE_ID         = A.CASE_ID
    )
WHERE X.CASE_ID IN
    (SELECT A.CASE_ID
     FROM CI_CASE A,
          CISADM.C1_PER_CONTDDET B,
          CISADM.C1_COMM_RTE_TYPE C
     WHERE CONTACT_METH_FLG = 'EM'
     AND A.CONTACT_PER_ID   = B.PER_ID
     AND B.COMM_RTE_TYPE_CD = C.COMM_RTE_TYPE_CD
     AND B.CND_PRIMARY_FLG = 'C1YS'
     AND C.COMM_RTE_METH_FLG = 'EMAIL'
    )
--AND X.CASE_ID BETWEEN '0000000000' AND '9999999999';
AND X.CASE_ID BETWEEN '0000000000' AND '0000000000';

```

### 2. Update Case Preferred Contact Method from Fax to Primary Fax Person Contact:

```

UPDATE CI_CASE X
SET X.CONTACT_METH_FLG = 'C1PC',
    X.C1_CONTACT_ID     =

```

```

        (SELECT B.C1_CONTACT_ID
        FROM CI_CASE A,
             CISADM.C1_PER_CONTDDET B,
             CISADM.C1_COMM_RTE_TYPE C
        WHERE CONTACT_METH_FLG = 'FAX'
        AND A.CONTACT_PER_ID = B.PER_ID
        AND B.COMM_RTE_TYPE_CD = C.COMM_RTE_TYPE_CD
        AND B.CND_PRIMARY_FLG = 'C1YS'
        AND C.COMM_RTE_METH_FLG = 'FAX'
        AND X.CASE_ID = A.CASE_ID
        )
WHERE X.CASE_ID IN
      (SELECT A.CASE_ID
      FROM CI_CASE A,
           CISADM.C1_PER_CONTDDET B,
           CISADM.C1_COMM_RTE_TYPE C
      WHERE CONTACT_METH_FLG = 'FAX'
      AND A.CONTACT_PER_ID = B.PER_ID
      AND B.COMM_RTE_TYPE_CD = C.COMM_RTE_TYPE_CD
      AND B.CND_PRIMARY_FLG = 'C1YS'
      AND C.COMM_RTE_METH_FLG = 'FAX'
      )
--AND X.CASE_ID BETWEEN '0000000000' AND '9999999999';
AND X.CASE_ID BETWEEN '0000000000' AND '0000000000';

```

### 3. Update Case Preferred Contact Method from Phone to Primary Phone Person Contact:

```

UPDATE CI_CASE X
SET X.CONTACT_METH_FLG = 'C1PC',
    X.C1_CONTACT_ID =
      (SELECT B.C1_CONTACT_ID
      FROM CI_CASE A,
           CISADM.C1_PER_CONTDDET B,
           CISADM.C1_COMM_RTE_TYPE C
      WHERE CONTACT_METH_FLG = 'PH'
      AND A.CONTACT_PER_ID = B.PER_ID
      AND B.COMM_RTE_TYPE_CD = C.COMM_RTE_TYPE_CD
      AND B.CND_PRIMARY_FLG = 'C1YS'
      AND C.COMM_RTE_METH_FLG = 'PHONE'
      AND X.CASE_ID = A.CASE_ID
      )
WHERE X.CASE_ID IN
      (SELECT A.CASE_ID
      FROM CI_CASE A,
           CISADM.C1_PER_CONTDDET B,
           CISADM.C1_COMM_RTE_TYPE C
      WHERE CONTACT_METH_FLG = 'PH'
      AND A.CONTACT_PER_ID = B.PER_ID
      AND B.COMM_RTE_TYPE_CD = C.COMM_RTE_TYPE_CD
      AND B.CND_PRIMARY_FLG = 'C1YS'
      AND C.COMM_RTE_METH_FLG = 'PHONE'
      )
--AND X.CASE_ID BETWEEN '0000000000' AND '9999999999';
AND X.CASE_ID BETWEEN '0000000000' AND '0000000000';

```

### 4. Update Customer Contact Preferred Contact Method from Email to Primary Email Person Contact:

```

UPDATE CI_CC X
SET X.CONTACT_METH_FLG = 'C1PC',
    X.C1_CONTACT_ID =

```

```

        (SELECT B.C1_CONTACT_ID
        FROM CI_CC A,
             CISADM.C1_PER_CONTDDET B,
             CISADM.C1_COMM_RTE_TYPE C
        WHERE CONTACT_METH_FLG = 'EM'
        AND A.PER_ID = B.PER_ID
        AND B.COMM_RTE_TYPE_CD = C.COMM_RTE_TYPE_CD
        AND B.CND_PRIMARY_FLG = 'C1YS'
        AND C.COMM_RTE_METH_FLG = 'EMAIL'
        AND X.CC_ID = A.CC_ID
        )
WHERE X.CC_ID IN
      (SELECT A.CC_ID
      FROM CI_CC A,
           CISADM.C1_PER_CONTDDET B,
           CISADM.C1_COMM_RTE_TYPE C
      WHERE CONTACT_METH_FLG = 'EM'
      AND A.PER_ID = B.PER_ID
      AND B.COMM_RTE_TYPE_CD = C.COMM_RTE_TYPE_CD
      AND B.CND_PRIMARY_FLG = 'C1YS'
      AND C.COMM_RTE_METH_FLG = 'EMAIL'
      )
--AND X.CC_ID BETWEEN '0000000000' AND '9999999999';
AND X.CC_ID BETWEEN '0000000000' AND '0000000000';

```

5. Update Customer Contact Preferred Contact Method from Fax to Primary Fax Person Contact:

```

UPDATE CI_CC X
SET X.CONTACT_METH_FLG = 'C1PC',
    X.C1_CONTACT_ID =
      (SELECT B.C1_CONTACT_ID
      FROM CI_CC A,
           CISADM.C1_PER_CONTDDET B,
           CISADM.C1_COMM_RTE_TYPE C
      WHERE CONTACT_METH_FLG = 'FAX'
      AND A.PER_ID = B.PER_ID
      AND B.COMM_RTE_TYPE_CD = C.COMM_RTE_TYPE_CD
      AND B.CND_PRIMARY_FLG = 'C1YS'
      AND C.COMM_RTE_METH_FLG = 'FAX'
      AND X.CC_ID = A.CC_ID
      )
WHERE X.CC_ID IN
      (SELECT A.CC_ID
      FROM CI_CC A,
           CISADM.C1_PER_CONTDDET B,
           CISADM.C1_COMM_RTE_TYPE C
      WHERE CONTACT_METH_FLG = 'FAX'
      AND A.PER_ID = B.PER_ID
      AND B.COMM_RTE_TYPE_CD = C.COMM_RTE_TYPE_CD
      AND B.CND_PRIMARY_FLG = 'C1YS'
      AND C.COMM_RTE_METH_FLG = 'FAX'
      )
--AND X.CC_ID BETWEEN '0000000000' AND '9999999999';
AND X.CC_ID BETWEEN '0000000000' AND '0000000000';

```

6. Update Customer Contact Preferred Contact Method from Phone to Primary Phone Person Contact:

```

UPDATE CI_CC X
SET X.CONTACT_METH_FLG = 'C1PC',
    X.C1_CONTACT_ID =

```

```

        (SELECT B.C1_CONTACT_ID
        FROM CI_CC A,
             CISADM.C1_PER_CONTDDET B,
             CISADM.C1_COMM_RTE_TYPE C
        WHERE CONTACT_METH_FLG = 'PH'
        AND A.PER_ID = B.PER_ID
        AND B.COMM_RTE_TYPE_CD = C.COMM_RTE_TYPE_CD
        AND B.CND_PRIMARY_FLG = 'C1YS'
        AND C.COMM_RTE_METH_FLG = 'PHONE'
        AND X.CC_ID = A.CC_ID
        )
WHERE X.CC_ID IN
      (SELECT A.CC_ID
      FROM CI_CC A,
           CISADM.C1_PER_CONTDDET B,
           CISADM.C1_COMM_RTE_TYPE C
      WHERE CONTACT_METH_FLG = 'PH'
      AND A.PER_ID = B.PER_ID
      AND B.COMM_RTE_TYPE_CD = C.COMM_RTE_TYPE_CD
      AND B.CND_PRIMARY_FLG = 'C1YS'
      AND C.COMM_RTE_METH_FLG = 'PHONE'
      )
--AND X.CC_ID BETWEEN '0000000000' AND '9999999999';
AND X.CC_ID BETWEEN '0000000000' AND '0000000000';

```

7. The following shows remaining cases that need to be investigated manually:

```

SELECT *
FROM CI_CASE
WHERE CONTACT_METH_FLG <> ' '
      AND CONTACT_METH_FLG NOT IN ('N/A', 'POST', 'C1PC');

```

8. The following shows remaining Customer Contacts that need to be investigated manually:

```

SELECT *
FROM CI_CC
WHERE CONTACT_METH_FLG <> ' '
      AND CONTACT_METH_FLG NOT IN ('N/A', 'POST', 'C1PC');

```

# Appendix F

---

## Upgrades to the Oracle Utilities Customer Care and Billing 2.8.0.0.0 Database

For a list of changes in the Oracle Utilities Customer Care and Billing database for this release, refer to the *Oracle Utilities Customer Care and Billing Database Changes Guide* included in this release.

# Appendix G

---

## Upgrades to the Oracle Utilities Application Framework Database

This section describes the database upgrade process for the Oracle Utilities Application Framework database since the last release. It highlights changes made to the administrative tables and how those changes should be applied to the data in order for your current database to work with the Oracle Utilities Application Framework application, and to preserve the business logic implemented in the previous version of the application. The changes that do not require data upgrade are not described in this document. The tasks that need to be performed after running the upgrade scripts are included.

**Note:** Upgrade scripts do not automatically enable the newly added functionality by default. Please refer to the release notes for more information.

The section provides information on upgrading the Oracle Utilities Application Framework Database including:

- [Upgrading from Oracle Utilities Application Framework v4.3.0.1.0 to v4.3.0.2.0](#)
- [Upgrading from Oracle Utilities Application Framework v4.3.0.2.0 to v4.3.0.3.0](#)
- [Upgrading from Oracle Utilities Application Framework v4.3.0.3.0 to v4.3.0.4.0](#)
- [Upgrading from Oracle Utilities Application Framework v4.3.0.4.0 to v4.3.0.5.0](#)
- [Upgrading from Oracle Utilities Application Framework v4.3.0.5.0 to v4.3.0.6.0](#)
- [Upgrading from Oracle Utilities Application Framework v4.3.0.6.0 to v4.4.0.0.0](#)
- [Upgrading from Oracle Utilities Application Framework v4.4.0.0.0 to v4.4.0.2.0](#)
- [Upgrading from Oracle Utilities Application Framework v4.4.0.2.0 to v4.4.0.3.0](#)

# Upgrading from Oracle Utilities Application Framework v4.3.0.1.0 to v4.3.0.2.0

## New Tables

Table	Type of Table
F1_BUS_FLG	Business Flag
F1_BUS_FLG_CHAR	Business Flag Characteristic
F1_BUS_FLG_K	Business Flag Key Table
F1_BUS_FLG_LOG	Business Flag Log
F1_BUS_FLG_LOG_PARM	Business Flag Log Parameter
F1_BUS_FLG_REL	Business Flag Relationship
F1_BUS_FLG_REL_OBJ	Business Flag Related Object
F1_BUS_FLG_TYPE	Business Flag Type
F1_BUS_FLG_TYPE_ALG	Business Flag Type Algorithm
F1_BUS_FLG_TYPE_BUS_PROC	Business Flag Type / Business Process
F1_BUS_FLG_TYPE_CHAR	Business Flag Type Characteristic
F1_BUS_FLG_TYPE_L	Business Flag Type Language
F1_ETL_MP_CTRL	ETL Mapping Control

## New Views

None

## Dropped Tables

None

## Unsupported Tables

None

## Added Columns

Table	Column	Required
CI_BATCH_THD	LOG_FILE_NAME	
CI_MD_TBL	CHAR_ENTITY_FLG	N
F1_EXTSYS_OUTMSG_PROF	JSON_CONVRSN_METH_FLG	N
F1_EXTSYS_OUTMSG_PROF	REQ_SCHEMA_NAME	N
F1_EXTSYS_OUTMSG_PROF	RES_SCHEMA_NAME	N
F1_MIGR_OBJ_ALG	ALG_PROC_TYPE_FLG	N



### Dropped Columns

Table	Column
CI_MD_TBL	TBL_USAGE_FLG
CI_MD_TBL_FLD	FLD_USAGE_FLG

### Unsupported Table Columns

None

### Column Format Change

None

# Upgrading from Oracle Utilities Application Framework v4.3.0.2.0 to v4.3.0.3.0

## New Tables

Table	Type of Table
F1_LGCY_OBJ	Legacy Object
F1_PERF_TGT	Performance Target
F1_PERF_TGT_CHAR	Performance Target Characteristic
F1_PERF_TGT_L	Performance Target Language
F1_PERF_TGT_LOG	Performance Target Log
F1_PERF_TGT_LOG_PARM	Performance Target Log Parameter
F1_PERF_TGT_REL_OBJ	Performance Target Related Object
F1_PERF_TGT_TYPE	Performance Target Type
F1_PERF_TGT_TYPE_CHAR	Performance Target Type Characteristic
F1_PERF_TGT_TYPE_L	Performance Target Type Language
F1_STATS	Statistics Control
F1_STATS_CHAR	Statistics Control Characteristic
F1_STATS_L	Statistics Control Language
F1_STATS_LOG	Statistics Control Log
F1_STATS_LOG_PARM	Statistics Control Log Parameter
F1_STATS_REL_OBJ	Statistics Control Related Object
F1_STATS_SNPSHT	Statistics Snapshot
F1_STATS_SNPSHT_CHAR	Statistics Snapshot Characteristic
F1_STATS_SNPSHT_LOG	Statistics Snapshot Log
F1_STATS_SNPSHT_LOG_PARM	Statistics Snapshot Log Parameter
F1_STATS_SNPSHT_REL_OBJ	Statistics Snapshot Related Object
F1_SVC_CATALOG	Web Service Catalog

## New Views

None

## Dropped Tables

None

## Unsupported Tables

None

**Added Columns**

Table	Column	Required
F1_EXTSYS_OUTMSG_PROF	NAMESPACE_FLG	N
F1_EXTSYS_OUTMSG_PROF	WSDL_FILE_NAME	N

**Dropped Columns**

None

**Unsupported Table Columns**

None

**Column Format Change**

None

**Primary Key Change**

None

# Upgrading from Oracle Utilities Application Framework v4.3.0.3.0 to v4.3.0.4.0

## New Tables

Table	Type of Table
F1_MIGR_REQ_INCL_REQ	Migration request Grouping

## New Views

None

## Dropped Tables

None

## Unsupported Tables

None

## Added Columns

Table	Column	Required
CI_BATCH_CTRL	APP_SVC_ID	Y
CI_XAI_RCVR_CTX	SEQNO	Y
CI_XAI_SNDR_CTX	SEQNO	Y
F1_IWS_SVC_ANN	SEQ_NUM	Y
F1_MIGR_REQ	MIGR_REQ_CAT_XFLG	N
F1_MIGR_REQ	MIGR_REQ_CLASS_FLG	Y
F1_MIGR_REQ_INSTR_ENTTTY	COMMENT_LONG	N
F1_MIGR_REQ_INSTR_ENTTTY	EXT_REFERENCE_ID	N

## Dropped Columns

Table	Column
CI_XAI_RCVR_CTX	CTXT_VAL

**Unsupported Table Columns**

None

**Column Format Change**

Table Name	Column Name	From	To
F1_EXT_LOOKUP_ VAL_CHAR	F1_EXT_LOOKUP_ VALUE	VARCHAR2 (30)	VARCHAR2 (254)

**Primary Key Change**

Table	Primary Key Columns
CI_XAI_RCVR_CTX	XAI_RCVR_ID, SEQNO
CI_XA_SNDR_CTX	XAI_SENDER_ID, SEQNO

# Upgrading from Oracle Utilities Application Framework v4.3.0.4.0 to v4.3.0.5.0

## New Tables

Table	Description	Type of Table
F1_DEPLOYMENT	Deployment	Transaction
F1_DEPLOYMENT_ITEM	Deployment Item	Transaction
F1_DEPLOYMENT_ITEM_METADATA	Deployment Item Meta Data	Transaction
F1_DEPLOYMENT_PART	Deployment Part	Master
F1_DEPLOYMENT_PART_L	Deployment Part Language	Master
F1_DEPLOYMENT_TYPE	Deployment Type	Master
F1_DEPLOYMENT_TYPE_L	Deployment Type Language	Master
F1_DEPTYT_DEPPART	Deployment Type / Deployment Part	Transaction
F1_DEPTYT_MDT_TYPE	Deployment Type / MDT Type	Transaction
F1_DEPTYT_MSG_CAT	Deployment Type Message Category	Transaction
F1_DEPTYT_USR_GRP	Deployment Type User Group	Transaction
F1_MDT	Mobile Data Terminal	Transaction
F1_MDT_CHAR	Mobile Data Terminal Characteristics	Transaction
F1_MDT_TYPE	Mobile Data Terminal Type	Master
F1_MDT_TYPE_CHAR	Mobile Data Terminal Type Characteristics	Master
F1_MDT_TYPE_L	Mobile Data Terminal Type Language	Master
F1_MOB_COMP_CHAR	Mobile Component Characteristics	Admin - System
F1_MOB_COMP_CNT	Mobile Component Content	Admin - System
F1_MOBILE_COMPONENT	Mobile Component	Admin - System
F1_MOBILE_COMPONENT_L	Mobile Component Language	Admin - System

F1_REMOTE_MSG	Remote Message	Transaction
F1_REMOTE_MSG_CHAR	Remote Message Characteristics	Transaction
F1_REMOTE_MSG_LOG	Remote Message Log	Transaction
F1_REMOTE_MSG_LOG_PARM	Remote Message Log Parameters	Transaction
F1_WEB_CAT_L	Web Service Category Language	Admin - System
F1_WEB_CAT_INCL_SVC	Web Service Category - Included Services	Admin - System
F1_WEB_CAT	Web Service Category	Admin - System

Note that in addition, the following table was added to 4.3.0.4.0 via a hot fix, but was not included in 4.3.0.5.0 until after the final build and is therefore added as a hot fix. Clients upgrading to 4.3.0.5.0 may see that the table is dropped via the blueprint and then reinstated after applying the bug fixes.

Table	Description	Type of Table
F1_MIGR_OBJ_SQL_PK	Migration Object SQL Primary Key	Transaction

### New Views

None

### Dropped Tables

Table
F1_IWS_ANN_CHAR
F1_IWS_ANN_TYPE_CHAR

### Unsupported Tables

None

### Added Columns

Table	Column	Required
CI_MD_SVC	APP_SVC_ID	N
F1_OUTMSG	BO_XML_DATA_AREA	N
F1_OUTMSG_TYPE	OUTMSG_PRIOR_FLG	Y
F1_OUTMSG_TYPE	OWNER_FLG	N
F1_OUTMSG_TYPE	TYPE_BUS_OBJ_CD	N

---

Table	Column	Required
F1_OUTMSG_TYPE_L	OWNER_FLG	N

---

**Dropped Columns**

None

**Unsupported Table Columns**

None

**Column Format Change**

None

**Primary Key Change**

None

**Index Changes**

Index S1C675S1 for table F1\_EXT\_LOOKUP\_VAL\_CHAR has been renamed to F1C675S1.



# Upgrading from Oracle Utilities Application Framework v4.3.0.5.0 to v4.3.0.6.0

## New Tables

Table	Description	Table Type
F1_ATTACHMENT_K	Attachment Key	Transaction
F1_CRYPTO_KEY	Key Ring Key	Admin
F1_CRYPTO_KEY_RING	Key Ring	Admin
F1_CRYPTO_KEY_RING_L	Key Ring Language	Admin
F1_CRYPTO_KEY_RING_LOG	Key Ring Log	Admin
F1_CRYPTO_KEY_RING_LOG_PARM	Key Ring Log Parameter	Admin
F1_CUBE_TYPE	Cube Type	Admin
F1_CUBE_TYPE_L	Cube Type Language	Admin
F1_CUBE_VIEW	Cube View	Transaction
F1_CUBE_VIEW_L	Cube View Language	Transaction
F1_CUBE_VIEW_LOG	Cube View Log	Transaction
F1_CUBE_VIEW_LOG_PARM	Cube View Log Parameters	Transaction
F1_DEPLOYMENT_K	Deployment Key	Transaction
F1_ERASURE_SCHED	Object Erasure Schedule	Transaction
F1_ERASURE_SCHED_K	Object Erasure Schedule Key	Transaction
F1_ERASURE_SCHED_LOG	Object Erasure Schedule Log	Transaction
F1_ERASURE_SCHED_LOG_PARM	Object Erasure Schedule Log Parameter	Transaction
F1_MDT_K	Mobile Data Terminal Key	Transaction
F1_MIGR_OBJ_SQL_PK	Migration Object SQL Primary Key	Transaction
F1_PROC_DEFN	Process Flow Type	Admin
F1_PROC_DEFN_L	Process Flow Type Language	Admin
F1_PROC_NEXT_PANEL	Next Panel	Admin
F1_PROC_PANEL	Process Panel	Admin
F1_PROC_STORE	Process Flow	Transaction

Table	Description	Table Type
F1_PROC_STORE_DTL_ELEMENTS	Process Flow Detail Elements	Transaction
F1_PROC_STORE_K	Process Flow Key	Transaction
F1_PROC_STORE_LOG	Process Flow Log	Transaction
F1_PROC_STORE_LOG_PARM	Process Flow Log Parameters	Transaction
F1_REMOTE_MSG_K	Mobile Remote Message Key	Transaction
F1_STATS_SNPSHT_K	Statistics Snapshot Key	Transaction

Note that the following tables have system generated keys but do not have a separate key table. Per the new table list, the key tables are provided and these tables are updated accordingly.

Table	Description
F1_ATTACHMENT	Attachment
F1_DEPLOYMENT	Deployment
F1_MDT	Mobile Data Terminal
F1_REMOTE_MSG	Mobile Remote Message
F1_STATS_SNPSHT	Statistics Snapshot

### New Views

None

### Dropped Tables

Table
F1_IWS_SVC_OPER_L

### Unsupported Tables

The table below has been added for future functionality and is not currently in use.

Table
F1_CRYPT_KEY_RING_LINK

### Added Columns

Table	Column	Required
CI_BATCH_RUN	END_DTTM	N

Table	Column	Required
CI_BATCH_RUN	START_DTTM	N
CI_COUNTRY	ADDR1_USG_FLG	Y
CI_COUNTRY	ADDR2_USG_FLG	Y
CI_COUNTRY	ADDR3_USG_FLG	Y
CI_COUNTRY	ADDR4_USG_FLG	Y
CI_COUNTRY	CITY_USG_FLG	Y
CI_COUNTRY	COUNTY_USG_FLG	Y
CI_COUNTRY	GEO_CODE_USG_FLG	Y
CI_COUNTRY	HOUSE_TYPE_USG_FLG	Y
CI_COUNTRY	IN_CITY_LIM_USG_FLG	Y
CI_COUNTRY	NUM1_USG_FLG	Y
CI_COUNTRY	NUM2_USG_FLG	Y
CI_COUNTRY	POSTAL_USG_FLG	Y
CI_COUNTRY	STATE_USG_FLG	Y
F1_ATTACHMENT	ATTACHMENT_EXT_ID	N
F1_ATTACHMENT	COMMENT_LONG	N
F1_IWS_SVC	RESOURCE_CAT_XFLG	N
F1_IWS_SVC	WEB_SVC_CLASS_FLG	Y
F1_IWS_SVC_OPER	RESOURCE_URI	N
F1_IWS_SVC_OPER	REST_HTTP_METHOD_FLG	N
F1_SVC_CATALOG	WEB_SVC_CLASS_FLG	Y

**Dropped Columns**

None

**Column Format Change**

None

**Primary Key Change**

None

**Index Changes**

None

# Upgrading from Oracle Utilities Application Framework v4.3.0.6.0 to v4.4.0.0.0

## **New Tables**

None

## **New Views**

None

## **Dropped Tables**

None

## **Unsupported Tables**

None

## **Added Columns**

None

## **Dropped Columns**

None

## **Column Format Change**

None

## **Primary Key Change**

None

## **Index Changes**

create index XT039S8 on  
CI\_TD\_ENTRY(ENTRY\_STATUS\_FLG,TD\_TYPE\_CD,MESSAGE\_CAT\_NBR,MESSAGE\_NBR)

# Upgrading from Oracle Utilities Application Framework v4.4.0.0.0 to v4.4.0.2.0

## New Tables

Table	Description	Table Type
F1_MKTPROC	Market Process	Transaction
F1_MKTPROC_LOG	Market Process Log	Transaction
F1_MKTPROC_LOG_PARM	Market Process Log Parameter	Transaction
F1_MKTPROC_CHAR	Market Process Characteristics	Transaction
F1_MKTPROC_ID	Market Process Identifiers	Transaction
F1_MKTPROC_REL_OBJ	Market Process Related Objects	Transaction
F1_MKTPROC_REL_PROC	Related Market Processes	Transaction
F1_MKTMSG_IN	Inbound Market Message	Transaction
F1_MKTMSG_IN_LOG	Inbound Market Message Log	Transaction
F1_MKTMSG_IN_LOG_PARM	Inbound Market Message Log Parameter	Transaction
F1_MKTMSG_IN_CHAR	Inbound Market Message Characteristics	Transaction
F1_MKTMSG_IN_DATA	Inbound Market Message Data	Transaction
F1_MKTMSG_IN_EXT_REF	Inbound Market Message References	Transaction
F1_MKTMSG_IN_ID	Inbound Market Message Identifiers	Transaction
F1_MKTMSG_IN_REL_OBJ	Inbound Market Message Related Objects	Transaction
F1_MKTCFG	Market Configuration	Admin
F1_MKTCFG_L	Market Configuration Language	Admin(non system)
F1_MKTCFG_CHAR	Market Configuration Characteristics	Master
F1_MKTMSG_TYPE	Market Message Type	Admin(non system)

<b>Table</b>	<b>Description</b>	<b>Table Type</b>
F1_MKTMSG_TYPE_L	Market Message Type	Admin (non system)
F1_MKTMSG_TYPE_CHAR	Market Message Type Characteristics	Admin (non system)
F1_MKTPROC_EVT	Market Process Event	Transaction
F1_MKTPROC_EVT_LOG	Market Process Event Log	Transaction
F1_MKTPROC_EVT_LOG_PARM	Market Process Event Log Parameter	Transaction
F1_MKTPROC_EVT_CHAR	Market Process Event Characteristics	Transaction
F1_MKTPROC_EVT_REL_OBJ	Market Process Event Related Objects	Transaction
F1_MKTMSG_OUT	Outbound Market Message	Transaction
F1_MKTMSG_OUT_LOG	Outbound Market Message Log	Transaction
F1_MKTMSG_OUT_LOG_PARM	Outbound Market Message Log Parameter	Transaction
F1_MKTMSG_OUT_CHAR	Outbound Market Message Characteristics	Transaction
F1_MKTMSG_OUT_DATA	Outbound Market Message Data	Transaction
F1_MKTMSG_OUT_EXT_REF	Outbound Market Message References	Transaction
F1_MKTMSG_OUT_ID	Outbound Market Message Identifiers	Transaction
F1_MKTMSG_OUT_REL_OBJ	Outbound Market Message Related Objects	Transaction
F1_MKTPROC_TYPE	Market Process Type	Admin(non system)
F1_MKTPROC_TYPE_L	Market Process Type Language	Admin(non system)
F1_MKTPROC_TYPE_CHAR	Market Process Type Characteristics	Admin(non system)
F1_MKTPROC_TYPE_EVT	Market Process Type Events	Admin(non system)
F1_CALENDAR_D	Calendar Dimension	Transaction
F1_TIME_D	Time Dimension	Transaction
F1_IWS_SVC_OPER_PARM	Inbound Web Service Operations Parameter	Admin

**New Views**

None

**Dropped Tables**

None

**Unsupported Tables**

None

**Added Columns**

Table	Description	Table Type
CI_BATCH_THD	THD_RETRY_CNT	N
F1_IWS_SVC	URI_COMPONENT	N

**Dropped Columns**

None

**Column Format Change**

None

**Primary Key Change**

None

**Index Changes**

create index XT039S8 on

CI\_TD\_ENTRY(ENTRY\_STATUS\_FLG,TD\_TYPE\_CD,MESSAGE\_CAT\_NBR,MESSAGE\_NBR)

CREATE INDEX XT026S5 ON CI\_NT\_DWN (SPR\_CD,CRE\_DTTM)

PCTFREE 10 INITRANS 2 MAXTRANS 255 COMPUTE STATISTICS

STORAGE(INITIAL 262144 NEXT 262144 MINEXTENTS 1 MAXEXTENTS

2147483645 PCTINCREASE 0 FREELISTS 1 FREELIST GROUPS 1

BUFFER\_POOL DEFAULT FLASH\_CACHE DEFAULT CELL\_FLASH\_CACHE

DEFAULT) TABLESPACE "CISTS\_01"

# Upgrading from Oracle Utilities Application Framework v4.4.0.2.0 to v4.4.0.3.0

For a list of database changes in Oracle Utilities Application Framework from v4.4.0.2.0 to v4.4.0.3.0, refer to the *Oracle Utilities Customer Care and Billing Database Changes Guide* included in the documentation package.



# Appendix H

---

## Oracle Application Framework System Table Guide

This section lists the system tables owned by the Oracle Utilities Application Framework V4.4.0.3.0 and explains the data standards of the system tables. The data standards are required for the installation of Oracle Utilities Application Framework, development within the Oracle Utilities Application Framework, and the configuration and customization of Oracle Utilities products. Adhering to the data standards is a prerequisite for seamless upgrade to future releases.

This section includes:

- [About the Application Framework System Tables](#)
- [System Table Standards](#)
- [Guidelines for System Table Updates](#)
- [System Table List](#)

# About the Application Framework System Tables

System tables are a subset of the tables that must be populated at the time the product is installed. They include metadata and configuration tables. The data stored in the system tables are the information that Oracle Utilities Application Framework product operations are based on.

As the product adds more functionality, the list of system tables can grow. The complete list of the system tables can be found in the [System Table List](#) section.

## System Table Standards

System table standards must be observed for the following reasons:

- The product installation and upgrade process and customer modification data extract processes depend on the data prefix and owner flag values to determine the system data owned by each product.
- The standards ensure that there will be no data conflict in the product being developed and the future Oracle Utilities Application Framework release. They also ensure that there will be no data conflict between customer modifications and future Oracle Utilities product releases.
- The data prefix is used to prevent test data from being released to production.

**Developer's Note:** All test data added to the system data tables must be prefixed by ZZ (all upper case) in order for the installation and upgrade utility to recognize them as test data.

# Guidelines for System Table Updates

This section describes guidelines regarding the updating of the system table properties.

## Business Configuration Tables

The majority of data in the tables in this group belongs to the customer. But these tables are shipped with some initial data in order for the customer to login to the system and begin configuring the product. Unless specified otherwise, the initial data is maintained by Oracle Utilities Application Framework and subject to subsequent upgrade.

### Application Security and User Profile

These tables define the access rights of a User Group to Application Services and Application Users.

Properties	Description
Tables	SC_ACCESS_CNTL, SC_USER, SC_USR_GRP_PROF, SC_USR_GRP_USR, SC_USER_GROUP, SC_USER_GROUP_L
Initial Data	User Group ALL_SERVICES and default system user SYSUSER. Upon installation the system default User Group ALL_SERVICES is given unrestricted accesses to all services defined in Oracle Utilities Application Framework.

**Developer's Note:** When a new service is added to the system, all actions defined for the service must be made available to the User Group ALL\_SERVICES.

### Currency Code

The ISO 4217 three-letter codes are taken as the standard code for the representation of each currency.

Properties	Description
Tables	CI_CURRENCY_CD, CI_CURRENCY_CD_L
Initial Data	United States Dollar (USD)

### Display Profile

The Display Profile Code is referenced in the User (SC\_USER) table.

Properties	Description
Tables	CI_DISP_PROF, CI_DISP_PROF_L

Properties	Description
Initial Data	North America (NORTHAM) and Europe (EURO) and HIJRI Format (HIJRI)  <b>Configuration Note:</b> In order to use HIJRI Format display profile, additional configuration is needed to define the mappings between Hijri dates and Gregorian dates.  Refer to the Display Profile documentation for more information.

**Configuration Note:** In order to use HIJRI Format display profile, additional configuration is needed to define the mappings between Hijri dates and Gregorian dates.

Refer to the Display Profile documentation for more information.

## Installation Options

Installation Option has only one row that is shipped with the initial installation of the Oracle Utilities Application Framework. The columns that can be updated in these tables are customer data and will not be overridden by the upgrade process unless a special script is written and included in the upgrade process.

Properties	Description
Tables	F1_INSTALLATION, CI_INSTALL_ALG, CI_INSTALL_MSG, CI_INSTALL_MSG_L, CI_INSTALL_PROD
Initial Data	Option 11111

**Developer's Note:** The system data owner of an environment is defined in the Installation Option. This Owner Flag value is stamped on all system data that is added to this environment. The installation default value is Customer Modification (CM). This value must be changed in the base product development environments.

## Language Code

Language Code must be a valid code defined in ISO 639-2 Alpha-3. Adding a new language code to the table without translating all language dependent objects in the system can cause errors when a user chooses the language.

Properties	Description
Tables	CI_LANGUAGE
Initial Data	English (ENG)

## Time Zone

The installation options require a valid time zone. A value for UTC (Coordinated Universal Time) is provided. Implementations should define the appropriate time zone and update the installation option value accordingly.

Properties	Description
Tables	CI_TIME_ZONE, CI_TIME_ZONE_L
Initial Data	UTC

## To Do Priority and Role

New To Do Types released will be linked to the default To Do Role and set to the product assigned priority value initially. These initial settings can be overridden by the implementation.

Properties	Description
Tables	CI_ROLE(L), CI_TD_VAL_ROLE
Initial Data	F1_DFLT

## Development and Implementation System Tables

This section defines the standards for the system tables that contain data for application development. The data in these tables implement business logic and UI functions shared by various products and product extensions in the same database.

### Standards

When adding new data, the owner flag value of the environment must prefix certain fields of these tables. For example, when a developer adds a new algorithm type to an Oracle Utilities Customer Care and Billing environment, C1 should prefix the new Algorithm Type code. The fields that are subject to this rule are listed in Standard Data Fields property.

The data that is already in these tables cannot be modified if the data owner is different than the environment owner. This prevents the developers from accidentally modifying system data that belongs to the Oracle Utilities Application Framework or the base products. However, some fields are exempt from this rule and can be modified by Customer Modification. These fields are listed in the Customer Modification Fields property.

Note that the system supports a system upgrade rule called Override Owner flag. If duplicate data rows (data row with same primary key values) are found at the time of upgrade, the owner flag values will get overridden. The lower level application system data will override the upper level system data. For example, F1 overrides C1, F1&C1 override CM, and so on. This rule will be applied to the following tables: CI\_CHAR\_ENTITY, CI\_MD\_MO\_ALG, C1\_PORTAL\_OPT, F1\_BUS\_OBJ\_ALG, F1\_BUS\_OBJ\_STATUS\_ALG, CI\_MD\_MO\_OPT, F1\_BUS\_OBJ\_OPT, F1\_BUS\_OBJ\_STATUS\_OPT, F1\_BUS\_OBJ\_STATUS, F1\_BUS\_OBJ\_STATUS\_L

## Algorithm Type

Properties	Description
Tables	CI_ALG_TYPE, CI_ALG_TYPE_I, CI_ALG_TYPE_PRM, CI_ALG_TYPE_PRM_I
Standard Data Fields	Algorithm Type (ALG_TYPE_CD)
Customer Modification	None

## Algorithm

Properties	Description
Tables	CI_ALG, CI_ALG_I, CI_ALG_PARM, CI_ALG_VER
Standard Data Fields	Algorithm (ALG_CD)
Customer Modification	None

## Application Security

Properties	Description
Tables	SC_APP_SERVICE, SC_APP_SERVICE_I, CI_APP_SVC_ACC
Standard Data Fields	Application Service ID (APP_SVC_ID).
Customer Modification	None

## Batch Control

Properties	Description
Tables	CI_BATCH_CTRL, CI_BATCH_CTRL_I, CI_BATCH_CTRL_P, CI_BATCH_CTRL_P_I
Standard Data Fields	Batch Process (BATCH_CD), Program Name (PROGRAM_NAME)

Properties	Description
Customer Modification	Next Batch Number (NEXT_BATCH_NBR), Last Update Instance (LAST_UPDATE_INST), Last Update Date time (LAST_UPDATE_DTTM) and the batch process update these columns. Time Interval (TIMER_INTERVAL), Thread Count (BATCH_THREAD_CNT), Maximum Commit Records (MAX_COMMIT_RECS), User (USER_ID), Language (LANGUAGE_CD), Email Address (EMAILID), Start program debug tracing (TRC_PGM_STRT_SW), End Program Debug trace (TRC_PGM_END_SW), SQL debug tracing (TRC_SQL_SW) and Standard debug tracing (TRC_STD_SW) on CI_BATCH_CTRL Table. Batch Parameter Value (BATCH_PARM_VAL) and Security flag (TEXT_SECURITY_FLG) on Batch Control Parameters Table (CI_BATCH_CTRL_P)

## Business Object

Properties	Description
Tables	F1_BUS_OBJ, F1_BUS_OBJ_L, F1_BUS_OBJ_ALG, F1_BUS_OBJ_OPT, F1_BUS_OBJ_STATUS, F1_BUS_OBJ_STATUS_L, F1_BUS_OBJ_STATUS_ALG, F1_BUS_OBJ_STATUS_OPT, F1_BUS_OBJ_STATUS_RSN, F1_BUS_OBJ_STATUS_RSN_L, F1_BUS_OBJ_STATUS_RSN_CHAR, F1_BUS_OBJ_TR_RULE, F1_BUS_OBJ_TR_RULE_L
Standard Data Fields	Business Object (BUS_OBJ_CD), Status Reason (BO_STATUS_REASON_CD)
Customer Modification	Batch Control (BATCH_CD), Alert (BO_ALERT_FLG), Sequence (SORT_SEQ5), Status Reason (STATUS_REASON_FLG) fields on Business Object Status Table (F1_BUS_OBJ_STATUS). Instance Control (INSTANCE_CTRL_FLG), Application Service (APP_SVC_ID) on Business Object Table (F1_BUS_OBJ). Status Reason Selection (STATUS_REASON_SELECT_FLG) on Status Reason Table (F1_BUS_OBJ_STATUS_RSN)

## Business Service

Properties	Description
Tables	F1_BUS_SVC, F1_BUS_SVC_L
Standard Data Fields	Business Service (BUS_SVC_CD)
Customer Modification	Application Service (APP_SVC_ID)

## Characteristics

Properties	Description
Tables	CI_CHAR_TYPE, CI_CHAR_TYPE_L, CI_CHAR_ENTITY, CI_CHAR_VAL, CI_CHAR_VAL_L
Standard Data Fields	Characteristic Type (CHAR_TYPE_CD) Characteristic Value (CHAR_VAL) on CI_CHAR_VAL  If the characteristic type is customizable, Customer Modification can insert new characteristic values. CM must prefix when implementers introduce a new characteristic value.
Customer Modification	Adhoc Characteristic Value Validation Rule (ADHOC_VAL_ALG_CD), Allow Search by Characteristic Value (SEARCH_FLG)

## Configuration Migration Assistant

Properties	Description
Tables	F1_MIGR_PLAN, F1_MIGR_PLAN_L, F1_MIGR_PLAN_INSTR, F1_MIGR_PLAN_INSTR_L, F1_MIGR_PLAN_INSTR_ALG, F1_MIGR_REQ, F1_MIGR_REQ_L, F1_MIGR_REQ_INSTR, F1_MIGR_REQ_INSTR_L, F1_MIGR_REQ_INSTR_ENTITY, F1_MIGR_REQ_INCL_REQ
Standard Data Fields	Migration Plan Code (MIGR_PLAN_CD), Migration Request Code (MIGR_REQ_CD)
Customer Modification	None

## Data Area

Properties	Description
Tables	F1_DATA_AREA, F1_DATA_AREA_L
Standard Data Fields	Data Area Code (DATA_AREA_CD)
Customer Modification	None

## Deployment Part

Properties	Description
Tables	F1_DEPLOYMENT_PART, F1_DEPLOYMENT_PART_L, F1_DEPLOYMENT_ITEM
Standard Data Fields	Deployment ID (F1_DEPLOYMENT_ID)
Customer Modification	None



## Display Icon

Properties	Description
Tables	CI_DISP_ICON, CI_DISP_ICON_L
Standard Data Fields	Display Icon Code (DISP_ICON_CD)
Customer Modification	None

## Extendable Lookup

Properties	Description
Tables	F1_EXT_LOOKUP_VAL, F1_EXT_LOOKUP_VAL_L, F1_EXT_LOOKUP_VAL_CHAR
Standard Data Fields	Business Object (BUS_OBJ_CD), Extendable Lookup Value (F1_EXT_LOOKUP_VALUE)
Customer Modification	Business Object Data Area (BO_DATA_AREA) Override Description (DESCR_OVRD) on Extendable Lookup Field Value Language Table (F1_EXT_LOOKUP_VAL_L) <b>Note:</b> When the product releases base owned records in Extendable Lookup, if there are additional elements the business object will map the element to the BO_DATA_AREA if the value is allowed to be modified by an implementation.

## Foreign Key Reference

Properties	Description
Tables	CI_FK_REF, CI_FK_REF_L
Standard Data Fields	FK reference code (FK_REF_CD)
Customer Modification	Info Program Name (INFO_PRG), Zone (ZONE_CD)

## Inbound Web Service

Properties	Description
Tables	F1_IWS_SVC_L, F1_IWS_SVC, F1_IWS_SVC_OPER_L, F1_IWS_SVC_OPER, F1_IWS_SVC_OPER_PARM, F1_IWS_ANN_L, F1_IWS_ANN_PARM, F1_IWS_ANN, F1_IWS_ANN_TYPE_L, F1_IWS_ANN_TYPE, F1_IWS_ANN_TYPE_PARM, F1_IWS_ANN_TYPE_PARM_L
Standard Data Fields	Webservice Name (IN_SVC_NAME), Annotation (ANN_CD), Annotation Type (ANN_TYPE_CD)

Properties	Description
Customer Modification	Debug (DEBUG_SW), Active (ACTIVE_SW), Trace (TRACE_SW), Request XSL (REQUEST_XSL), Response XSL (RESPONSE_XSL)

## Unsupported Metadata

Properties	Description
Tables	F1_LGCY_OBJ
Standard Data Fields	Object ID (LGCY_OBJ_ID)
Customer Modification	None

## Lookup

Properties	Description
Tables	CI_LOOKUP_FIELD, CI_LOOKUP_VAL, CI_LOOKUP_VAL_L
Standard Data Fields	<p>Field Name (FIELD_NAME)</p> <ul style="list-style-type: none"> <li>A lookup field name must have corresponding field metadata. The name of the lookup field column must be assigned to avoid conflicts among different products. If you follow the standards for database field names, a Customer Modification lookup field name will be automatically Customer Modification prefixed.</li> </ul> <p>Field Value (FIELD_VALUE)</p> <ul style="list-style-type: none"> <li>If a lookup field is customizable, Customer Modification can insert new lookup values. X or Y must prefix when implementers introduce a new lookup value.</li> <li>Product development may add lookup values to a Oracle Utilities Application Framework owned lookup field's value. When extended new value is added, the Owner Flag is used to prefix the value.</li> </ul> <p>For example: When the Oracle Utilities Customer Care and Billing product adds a new value to the algorithm entity flag (ALG_ENTITY_FLG), it is prefixed with C1.</p>
Customer Modification	Override Description (DESCR_OVRD) on Lookup Field Value Language Table (CI_LOOKUP_VAL_L)

## Map

Properties	Description
Tables	F1_MAP, F1_MAP_L
Standard Data Fields	UI Map (MAP_CD)
Customer Modification	None

## Managed Content

Properties	Description
Tables	F1_MANAG_CONTENT, F1_MANAG_CONTENT_L
Standard Data Fields	Managed Content (MANAG_CONTENT_CD)
Customer Modification	None

## Messages

Properties	Description
Tables	CI_MSG_CATEGORY, CI_MSG_CATEGORY_L, CI_MSG, CI_MSG_L

Properties	Description
Standard Data Fields	<p data-bbox="846 218 1308 249">Message Category (MESSAGE_CAT_NBR)</p> <ul data-bbox="894 254 1507 554" style="list-style-type: none"> <li data-bbox="894 254 1507 422">• Messages are grouped in categories and each category has message numbers between 1 and 99999. A range of message categories is assigned to a product. An implementation may only use categories assigned for customization use.</li> <li data-bbox="894 443 1507 506">• Implementer Message Categories are 80000 and 90000</li> <li data-bbox="894 527 1247 554">• Reserved for Tests - 99999</li> </ul> <p data-bbox="846 575 1479 606">Message Number (MESSAGE_NBR) for message categories</p> <ul data-bbox="894 611 1479 709" style="list-style-type: none"> <li data-bbox="894 611 1479 709">• Message numbers below 1000 are reserved for common messages. Implementers must not use message numbers below 1000.</li> </ul> <p data-bbox="846 730 1419 789">Message Number (MESSAGE_NBR) for Java message categories</p> <ul data-bbox="894 793 1507 1514" style="list-style-type: none"> <li data-bbox="894 793 1507 825">• Subsystem Standard Messages - 00001 thru 02000</li> <li data-bbox="894 846 1268 877">• Reserved - 02001 thru 09999</li> <li data-bbox="894 898 1393 930">• Published Messages - 10001 thru 11000</li> <li data-bbox="894 951 1370 982">• Package Messages - 10001 thru 90000</li> <li data-bbox="894 1003 1268 1035">• Reserved - 90001 thru 99999</li> <li data-bbox="894 1056 1507 1115">• Each package is allocated 100 message numbers, each starting from 101.</li> <li data-bbox="894 1136 1507 1398">• Published Messages are messages that are special-interest messages that implementations need to know about and are therefore published in the user docs. Examples of these include messages that are highly likely to be changed for an implementation, or messages that are embedded into other texts/messages and therefore the message number is never shown</li> <li data-bbox="894 1419 1507 1514">• Reserved message number ranges are for future use and therefore must not be used by all products.</li> </ul>
Customer Modification	Override Description (DESCRLONG_OVRD), Message Text Override (MESSAGE_TEXT_OVRD)

## Meta Data - Table and Field

Properties	Description
Tables	CI_MD_TBL, CI_MD_TBL_FLD, CI_MD_TBL_L, CI_MD_TBL_FLD_L, CI_MD_FLD, CI_MD_FLD_L, F1_DB_OBJECTS_REPO
Standard Data Fields	<p>Table Name (TBL_NAME)</p> <ul style="list-style-type: none"> <li>Table names must match with the physical table name or view name in the database.</li> <li>Field Name (FLD_NAME) Field name must match with the physical column name in the database unless the field is a work field. Field name does not have to follow the prefixing standard unless the field is a work field or customer modification field.</li> <li>F1_DB_OBJECTS_REPO Table stores information about Indexes, Sequences, Triggers and other database objects excluding Tables and Fields (as they are already stored in the other Metadata tables)</li> </ul>
Customer Modification	AuditSwitches(AUDIT_INSERT_SW,AUDIT_UPDATE_SW, AUDIT_DELETE_SW), Override label (OVRD_LABEL) on MD Table Field Table (CI_MD_TBL_FLD). Audit Program Name (AUDIT_PGM_NAME), Audit Table Name (AUDIT_TBL_NAME), Audit Program Type (AUDIT_PGM_TYPE_FLG), Key Validation (KEY_VALIDATION_FLG) and Caching strategy (CACHE_FLG) on MD Table (CI_MD_TBL). Override Label (OVRD_LABEL) and Customer Specific Description (DESCRLONG_OVRD) on Field Table.

## Meta Data - Constraints

Properties	Description
Tables	CI_MD_CONST, CI_MD_CONST_FLD
Standard Data Fields	<p>Constraint Id (CONST_ID)</p> <ul style="list-style-type: none"> <li>Index Name for Primary Constraints</li> <li>&lt;Index Name&gt;Rnn for Foreign Key Constraints Where <ul style="list-style-type: none"> <li>nn: integer, 01 through 99</li> </ul> </li> </ul>
Customer Modification	None

## Meta Data - Menu

Menus can be extended to support multiple products by adding a new menu line to an existing menu. The sequence number on the menu line language table

(CI\_MD\_MENU\_LINE\_I) determines the order the menu lines appear. Within the same sequence, alphabetic sorting is used.

Properties	Description
Tables	CI_MD_MENU, CI_MD_MENU_I, CI_MD_MENU_ITEM, CI_MD_MENU_ITEM_I, CI_MD_MENU_LINE, CI_MD_MENU_LINE_I
Standard Data Fields	Menu Name (MENU_NAME), Menu Item Id (MENU_ITEM_ID), Menu Line Id (MENU_LINE_ID)
Customer Modification	Override Label (OVRD_LABEL) on Menu Line Language Table (CI_MD_MENU_LINE_I)

### Meta Data - Program, Location and Services

Properties	Description
Tables	CI_MD_PRG_COM, CI_MD_PRG_LOC, CI_MD_SVC, CI_MD_SVC_I, CI_MD_SVC_PRG, CI_MD_PRG_MOD, CI_MD_PRG_EL_AT, CI_MD_PRG_ELEM, CI_MD_PRG_SEC, CI_MD_PRG_SQL, CI_MD_PRG_VAR, CI_MD_PRG_TAB
Standard Data Fields	Program Component Id (PROG_COM_ID), Location Id (LOC_ID), Program Component Name (PROG_COM_NAME), Service Name (SVC_NAME), Navigation Key (NAVIGATION_KEY)
Customer Modification	User Exit Program Name (USER_EXIT_PGM_NAME) on Program Components Table (CI_MD_PRG_COM),

### Meta Data - Maintenance Object

Properties	Description
Tables	CI_MD_MO, CI_MD_MO_I, CI_MD_MO_TBL, CI_MD_MO_OPT, CI_MD_MO_ALG
Standard Data Fields	Maintenance Object (MAINT_OBJ_CD)
Customer Modification	None

### Meta Data - Work Tables

Properties	Description
Tables	CI_MD_WRK_TBL, CI_MD_WRK_TBL_I, CI_MD_WRK_TBLFLD, CI_MD_MO_WRK
Standard Data Fields	Work Table Name (WRK_TBL_NAME)
Customer Modification	None

## Meta Data - Search Object

Properties	Description
Tables	CI_MD_SO, CI_MD_SO_L, CI_MD_SO_RSFLD, CI_MD_SO_RSFLDAT, CI_MD_SOCG, CI_MD_SOCG_FLD, CI_MD_SOCG_FLDAT, CI_MD_SOCG_L, CI_MD_SOCG_SORT
Standard Data Fields	Search Object (SO_CD)
Customer Modification	None

## Mobile Component

Properties	Description
Tables	F1_MOBILE_COMPONENT, F1_MOBILE_COMPONENT_L, F1_MOB_COMP_CNT, F1_MOBILE_COMP_CHAR
Standard Data Fields	Mobile Component Code (F1_MOB_COMP_TYPE_CD)
Customer Modification	Expiration Days (F1_EXPIRATION_TIME_DUR)

## Navigation Option

Properties	Description
Tables	CI_NAV_OPT, CI_NAV_OPT_L, CI_NAV_OPT_CTXT, CI_NAV_OPT_USG, CI_MD_NAV
Standard Data Fields	Navigation Option Code (NAV_OPT_CD), Navigation Key (NAVIGATION_KEY)
Customer Modification	None

## Outbound Message Type

Properties	Description
Tables	F1_OUTMSG_TYPE, F1_OUTMSG_TYPE_L
Standard Data Fields	Outbound Message Type Code (OUTMSG_TYPE_CD)
Customer Modification	Priority (OUTMSG_PRIOR_FLG)

## Portal and Zone

Properties	Description
Tables	CI_PORTAL, CI_PORTAL_I, CI_PORTAL_ZONE, CI_PORTAL_OPT, CI_ZONE, CI_ZONE_I, CI_ZONE_PRM, CI_ZONE_HDL, CI_ZONE_HDL_I, CI_ZONE_HDL_PRM, CI_ZONE_HDL_PRM_I, CI_UI_ZONE
Standard Data Fields	Portal Code (PORTAL_CD), Zone Code (ZONE_CD), Zone Type Code (ZONE_HDL_CD) <ul style="list-style-type: none"> <li>A new Zone can be added to the Product owned Portal Pages.</li> <li>The existing Zones cannot be removed from the Product owned Portal Pages.</li> </ul>
Customer Modification	Sort Sequence (SORT_SEQ) on Context Sensitive Zone Table (CI_UI_ZONE). Show on Portal Preferences (USER_CONFIG_FLG) on Portal Table (CI_PORTAL). Override Sequence (SORT_SEQ_OVRD) on Portal Zone Table (CI_PORTAL_ZONE). Customer Specific Description (DESCRLONG_OVRD) on Zone Language Table (CI_ZONE_I). Override Parameter Value (ZONE_HDL_PARM_OVRD) on Zone Type Parameters Table (CI_ZONE_HDL_PRM). Override Parameter Value (ZONE_PARM_VAL_OVRD) on Zone Parameters Table (CI_ZONE_PRM).

## Process Flow Type

Properties	Description
Tables	F1_PROC_DEFN F1_PROC_DEFN_I F1_PROC_NEXT_PANEL F1_PROC_PANEL
Standard Data Fields	Process Flow Type (PROCESS_CD)
Customer Modification	None

## Sequence

Properties	Description
Tables	CI_SEQ
Standard Data Fields	Sequence Name (SEQ_NAME)
Customer Modification	Sequence Number (SEQ_NBR) This field is updated by the application process and must be set to 1 initially.



## Schema

Properties	Description
Tables	F1_SCHEMA
Standard Data Fields	Schema Name (SCHEMA_NAME)
Customer Modification	None

## Script

Properties	Description
Tables	CI_SCR, CI_SCR_L, CI_SCR_CRT, CI_SCR_CRT_GRP, CI_SCR_CRT_GRP_L, CI_SCR_DA, CI_SCR_FLD_MAP, CI_SCR_PRMPPT, CI_SCR_PRMPPT_L, CI_SCR_STEP, CI_SCR_STEP_L
Standard Data Fields	Script (SCR_CD)
Customer Modification	None

## To Do Type

Properties	Description
Tables	CI_TD_TYPE, CI_TD_TYPE_L, CI_TD_SRTKEY_TY, CI_TD_DRLKEY_TY, CI_TD_SRTKEY_TY_L
Standard Data Fields	To Do Type Code (TD_TYPE_CD)
Customer Modification	Creation Batch Code (CRE_BATCH_CD), Route Batch Code (RTE_BATCH_CD), Priority Flag (TD_PRIORITY_FLG) on To Do Type Table (CI_TD_TYPE)

## Web Service Category

Properties	Description
Tables	F1_WEB_CAT, F1_WEB_CAT_L, F1_WEB_CAT_INCL_SVC
Standard Data Fields	Web Service Category code (WEB_SVC_CAT_CD)
Customer Modification	None

## XAI Configuration

Properties	Description
Tables	CI_XAI_ADAPTER, CI_XAI_ADAPTER_L, CI_XAI_CLASS, CI_XAI_CLASS_L, CI_XAI_ENV_HNDL, CI_XAI_ENV_HNDL_L, CI_XAI_FORMAT, CI_XAI_FORMAT_L, CI_XAI_RCVR, CI_XAI_RCVR_L, CI_XAI_RCVR_CTX, CI_XAI_RCVR_RSP, CI_XAI_RCVR_RGRP, CI_XAI_SENDER, CI_XAI_SENDER_L, CI_XAI_SNDR_CTX, CI_XAI_OPTION
Standard Data Fields	Adapter Id (XAI_ADAPTER_ID), Class Id (XAI_CLASS_ID), Envelope Handler Id (XAI_ENV_HNDL_ID), XAI Format Id (XAI_FORMAT_ID), Receiver Id (XAI_RCVR_ID), Sender Id (XAI_SENDER_ID)
Customer Modification	Option Value (OPTION_VALUE) on Message Option Table (CI_XAI_OPTION)

## XAI Services

Properties	Description
Tables	CI_XAI_IN_SVC, CI_XAI_IN_SVC_L, CI_XAI_SVC_PARM
Standard Data Fields	XAI Inbound Service Id (XAI_IN_SVC_ID), XAI Inbound Service Name (XAI_IN_SVC_NAME)
Customer Modification	XAI Version (XAI_VERSION_ID), Trace (TRACE_SW), Debug (DEBUG_SW), Request XSL (INPUT_XSL), Response XSL (RESPONSE_XSL), Record XSL (RECORD_XSL and Post Error (POST_ERROR_SW) on XAI Inbound Service Table (CI_XAI_IN_SVC)

## Inbound Web Service Operations Parameter

Properties	Description
Tables	F1_IWS_SVC_OPER_PARM
Standard Data Fields	Inbound Service Name (IN_SVC_NAME)
Customer Modification	None

## Market Configuration

Properties	Description
Tables	F1_MKTCFG
Standard Data Fields	Market Configuration Code (MKTCFG_CD)
Customer Modification	None

## File Integration

Properties	Description
Tables	F1_FILE_INT_REC, F1_FILE_INT_REC_L, F1_FILE_INT_REC_ALG, F1_FILE_INT_TYPE, F1_FILE_INT_TYPE_L
Standard Data Fields	File Integration Record (FILE_INT_REC_CD), File Integration Type (FILE_INT_TYPE_CD)
Customer Modification	None

## Meta Data - BI

Properties	Description
Tables	F1_MD_BI_TBL, F1_MD_BI_TBL_L, F1_MD_BI_TBL_FLD
Standard Data Fields	Table Name (BI_TBL_NAME)
Customer Modification	None

## Data Export Control

Properties	Description
Tables	F1_DATA_EXPORT_CTRL, F1_DATA_EXPORT_CTRL_LOG, F1_DATA_EXPORT_CTRL_LOG_PARM
Standard Data Fields	F1_DATA_EXPORT_CTRL (DATA_EXPORT_CD)
Customer Modification	None

## System Table List

This section contains names of system tables, upgrade actions, and a brief description of tables. The upgrade actions are explained below.

**Keep (KP):** The data in the table in the customer's database is kept untouched. No insert or delete is performed to this table by the upgrade process. The initial installation will add necessary data for the system

**Merge (MG):** The non-base product data in the table in the database is kept untouched. If the data belongs to the base product, any changes pertaining to the new version of the software are performed.

**Refresh (RF):** The existing data in the table is replaced with the data from the base product table. The product does not support customer specific data in these tables.

**Note.** New product data is also inserted into tables marked as 'Merge'. If implementers add rows for a customer specific enhancement, it can cause duplication when the system data gets upgraded to the next version. We strongly recommend following the guidelines on how to use designated range of values or prefixes to segregate the implementation data from the base product data.

Table Name	Upgrade Action	Description
CI_ALG	MG	Algorithm
CI_ALG_L	MG	Algorithm Language
CI_ALG_PARM	MG	Algorithm Parameters
CI_ALG_TYPE	MG	Algorithm Type
CI_ALG_TYPE_L	MG	Algorithm Type Language
CI_ALG_TYPE_PRM	MG	Algorithm Type Parameter
CI_ALG_TYPE_PRM_L	MG	Algorithm Type Parameter Language
CI_ALG_VER	MG	Algorithm Version
CI_APP_SVC_ACC	MG	Application Service Access Mode
CI_BATCH_CTRL	MG	Batch Control
CI_BATCH_CTRL_ALG	MG	Batch Control Algorithm
CI_BATCH_CTRL_L	MG	Batch Control Language
CI_BATCH_CTRL_P	MG	Batch Control Parameters
CI_BATCH_CTRL_P_L	MG	Batch Control Parameters Language
CI_CHAR_ENTITY	MG	Characteristic Type Entity
CI_CHAR_TYPE	MG	Characteristic Type
CI_CHAR_TYPE_L	MG	Characteristic Type Language
CI_CHAR_VAL	MG	Characteristic Type Value
CI_CHAR_VAL_L	MG	Characteristic Type Value Language

Table Name	Upgrade Action	Description
CI_DISP_ICON	MG	Display Icon
CI_DISP_ICON_L	MG	Display Icon Language
CI_FK_REF	MG	Foreign Key Reference
CI_FK_REF_L	MG	Foreign Key Reference Language
CI_LANGUAGE	MG	Language Code
CI_LOOKUP_FIELD	MG	Lookup Field
CI_LOOKUP_VAL	MG	Lookup Field Value
CI_LOOKUP_VAL_L	MG	Lookup Field Value Language
CI_MD_CONST	MG	Constraints
CI_MD_CONST_FLD	MG	Constraint Fields
CI_MD_FLD	MG	Field
CI_MD_FLD_L	MG	Field Language
CI_MD_MENU	MG	Menu Information
CI_MD_MENU_IMOD	MG	Menu Item Module Maint
CI_MD_MENU_ITEM	MG	Menu Item
CI_MD_MENU_ITEM_L	MG	Menu Item Language
CI_MD_MENU_L	MG	Menu Language
CI_MD_MENU_LINE	MG	Menu Line
CI_MD_MENU_LINE_L	MG	Menu Line Language
CI_MD_MENU_MOD	MG	Menu Product Components
CI_MD_MO	MG	Maintenance Object
CI_MD_MO_ALG	MG	Maintenance Object Algorithm
CI_MD_MO_L	MG	Maintenance Object Language
CI_MD_MO_OPT	MG	Maintenance Object Option
CI_MD_MO_TBL	MG	Maintenance Object Table
CI_MD_MO_WRK	MG	Maintenance Object Work Tables
CI_MD_NAV	MG	Navigation Key
CI_MD_PRG_COM	MG	Program Components
CI_MD_PRG_ELEM	MG	UI Page Elements
CI_MD_PRG_EL_AT	MG	UI Page Element Attributes
CI_MD_PRG_LOC	MG	Program Location
CI_MD_PRG_MOD	MG	Program Module

Table Name	Upgrade Action	Description
CI_MD_PRG_SEC	MG	UI Page Sections
CI_MD_PRG_SQL	MG	MD SQL Meta Data
CI_MD_PRG_TAB	MG	UI Tab Meta Data
CI_MD_PRG_VAR	MG	Program Variable
CI_MD_SO	MG	Search Object
CI_MD_SO CG	MG	Search Object Criteria Group
CI_MD_SO CG_FLD	MG	Search Object Criteria Group Field
CI_MD_SO CG_FLDAT	MG	Search Criteria Group Field Attribute
CI_MD_SO CG_L	MG	Search Object Criteria Group Language
CI_MD_SO CG_SORT	MG	Search Criteria Group Result Sort Order
CI_MD_SO_L	MG	Search Object Language
CI_MD_SO_RSFLD	MG	Search Object Result Field
CI_MD_SO_RSFLDAT	MG	Search Object Result Field Attribute
CI_MD_SVC	MG	MD Service
CI_MD_SVC_L	MG	MD Service Language
CI_MD_SVC_PRG	MG	MD Service Program
CI_MD_TAB_MOD	MG	UI Tab Module
CI_MD_TBL	MG	MD Table
CI_MD_TBL_FLD	MG	MD Table Field
CI_MD_TBL_FLD_L	MG	MD Table Field Language
CI_MD_TBL_L	MG	MD Table Language
CI_MD_WRK_TBL	MG	Work Table
CI_MD_WRK_TBLFLD	MG	Work Table Field
CI_MD_WRK_TBL_L	MG	Work Table Language
CI_MSG	MG	Message
CI_MSG_CATEGORY	MG	Message Category
CI_MSG_CATEGORY_L	MG	Message Category Language
CI_MSG_L	MG	Message Language
CI_NAV_OPT	MG	Navigation Option
CI_NAV_OPT_CTXT	MG	Navigation Option Context
CI_NAV_OPT_L	MG	Navigation Option Language
CI_NAV_OPT_USG	MG	Navigation Option Usage

Table Name	Upgrade Action	Description
CI_PORTAL	MG	Portal
CI_PORTAL_L	MG	Portal Language
CI_PORTAL_OPT	MG	Portal Option
CI_PORTAL_ZONE	MG	Portal Zone
CI_SCR	MG	Script
CI_SCR_CRT	MG	Script Criteria
CI_SCR_CRT_GRP	MG	Script Criteria Group
CI_SCR_CRT_GRP_L	MG	Script Criteria Group Language
CI_SCR_DA	MG	Script Data Area
CI_SCR_FLD_MAP	MG	Script Field Mapping
CI_SCR_L	MG	Script Language
CI_SCR_PRMPPT	MG	Script Prompt
CI_SCR_PRMPPT_L	MG	Script Prompt Language
CI_SCR_STEP	MG	Script Step
CI_SCR_STEP_L	MG	Script Step Language
CI_SEQ	MG	Sequence
CI_TD_DRLKEY_TY	MG	To Do Type Drill Key
CI_TD_SRTKEY_TY	MG	To Do Type Sort Key
CI_TD_SRTKEY_TY_L	MG	To Do Type Sort Key Language
CI_TD_TYPE	MG	To Do Type
CI_TD_TYPE_L	MG	To Do Type Language
CI_UI_ZONE	MG	Context Sensitive Zone
CI_USR_NAV_LINK	MG	User Favorite Links
CI_XAI_ADAPTER	MG	XAI Adapter
CI_XAI_ADAPTER_L	MG	XAI Adapter Lang
CI_XAI_CLASS	MG	Message Class
CI_XAI_CLASS_L	MG	Message Class Language
CI_XAI_ENV_HNDL	MG	XAI Envelope Handler
CI_XAI_ENV_HNDL_L	MG	XAI Envelope Handler Language
CI_XAI_IN_SVC	MG	XAI Inbound Service
CI_XAI_IN_SVC_L	MG	XAI Inbound Service Language
CI_XAI_SVC_PARM	MG	XAI Inbound Service Parameters

Table Name	Upgrade Action	Description
CI_ZONE	MG	Zone
CI_ZONE_HDL	MG	Zone Type
CI_ZONE_HDL_L	MG	Zone Type Language
CI_ZONE_HDL_PRM	MG	Zone Type Parameters
CI_ZONE_HDL_PRM_L	MG	Zone Type Parameters Language
CI_ZONE_L	MG	Zone Language
CI_ZONE_PRM	MG	Zone Parameters
F1_BUS_OBJ	MG	Business Object
F1_BUS_OBJ_ALG	MG	Business Object Algorithm
F1_BUS_OBJ_L	MG	Business Object Language
F1_BUS_OBJ_OPT	MG	Business Object Option
F1_BUS_OBJ_STATUS	MG	Business Object Status
F1_BUS_OBJ_STATUS_ALG	MG	Business Object Status Algorithm
F1_BUS_OBJ_STATUS_L	MG	Business Object Status Language
F1_BUS_OBJ_STATUS_OPT	MG	Business Object Status Option
F1_BUS_OBJ_STATUS_RSN	MG	Status Reason
F1_BUS_OBJ_STATUS_RSN_L	MG	Status Reason Language
F1_BUS_OBJ_TR_RULE	MG	Business Object Transition Rule
F1_BUS_OBJ_TR_RULE_L	MG	Business Object Transition Rule Language
F1_BUS_SVC	MG	Business Service
F1_BUS_SVC_L	MG	Business Service Language
F1_DATA_AREA	MG	Data Area
F1_DATA_AREA_L	MG	Data Area Language
F1_DB_OBJECTS_REPO	MG	Database Objects Repository
F1_DEPLOYMENT_ITEM	MG	Deployment Part Item
F1_DEPLOYMENT_PART	MG	Deployment Part
F1_DEPLOYMENT_PART_L	MG	Deployment Part Language
F1_EXT_LOOKUP_VAL	MG	Extendable Lookup
F1_EXT_LOOKUP_VAL_L	MG	Extendable Lookup Language
F1_EXT_LOOKUP_VAL_CHAR	MG	Extendable Lookup Characteristics
F1_IWS_ANN	MG	Web Service Annotation



Table Name	Upgrade Action	Description
F1_IWS_ANN_L	MG	Web Service Annotation Language
F1_IWS_ANN_PARM	MG	Web Service Annotation Parameter
F1_IWS_ANN_TYPE	MG	Web Service Annotation Type
F1_IWS_ANN_TYPE_L	MG	Web Service Annotation Type Language
F1_IWS_ANN_TYPE_PARM	MG	Web Service Annotation Type Parm
F1_IWS_ANN_TYPE_PARM_L	MG	Web Service Annotation Type Parameter Language
F1_IWS_SVC	MG	Inbound Web Service
F1_IWS_SVC_L	MG	Inbound Web Service Language
F1_IWS_SVC_OPER	MG	Inbound Web Service Operations
F1_IWS_SVC_OPER_PARM	MG	Inbound Web Service Operations Parameter
F1_MKTCFG	MG	Market Configuration
F1_MANAG_CONTENT	MG	Managed Content
F1_MANAG_CONTENT_L	MG	Managed Content Language
F1_MAP	MG	UI Map
F1_MAP_L	MG	UI Map Language
F1_MIGR_PLAN	MG	Migration Plan
F1_MIGR_PLAN_INSTR	MG	Migration Plan Instruction
F1_MIGR_PLAN_INSTR_ALG	MG	Migration Plan Instruction Algorithm
F1_MIGR_PLAN_INSTR_L	MG	Migration Plan Instruction Language
F1_MIGR_PLAN_L	MG	Migration Plan Language
F1_MIGR_REQ	MG	Migration Request
F1_MIGR_REQ_INCL_REQ	MG	Migration Request Grouping
F1_MIGR_REQ_INSTR	MG	Migration Request Instruction
F1_MIGR_REQ_INSTR_ENTITY	MG	Migration Request Instruction Entity
F1_MIGR_REQ_INSTR_L	MG	Migration Request Instruction Language
F1_MIGR_REQ_L	MG	Migration Request Language
F1_MOBILE_COMPONENT	MG	Mobile Component
F1_MOBILE_COMPONENT_L	MG	Mobile Component Language
F1_MOB_COMP_CHAR	MG	Mobile Component Characteristics

Table Name	Upgrade Action	Description
F1_MOB_COMP_CNT	MG	Mobile Component Content
F1_OUTMSG_TYPE	MG	Outbound Message Type
F1_OUTMSG_TYPE_L	MG	Outbound Message Type Language
F1_PROC_DEFN	MG	Process Flow Type
F1_PROC_DEFN_L	MG	Process Flow Type Language
F1_PROC_NEXT_PANEL	MG	Next Panel
F1_PROC_PANEL	MG	Process Panels
F1_SCHEMA	MG	Schema
F1_WEB_CAT	MG	Web Service Category
F1_WEB_CAT_L	MG	Web Service Category Language
F1_WEB_CAT_INCL_SVC	MG	Web Service Category Included Services
F1_FILE_INT_REC	MG	File Integration Record Table
F1_FILE_INT_REC_L	MG	File Integration Record Language Table
F1_FILE_INT_REC_ALG	MG	File Integration Record Algorithm Table
F1_FILE_INT_TYPE	MG	File Integration Type
F1_FILE_INT_TYPE_L	MG	File Integration Language Table
F1_MD_BI_TBL	MG	MD Table for BI
F1_MD_BI_TBL_L	MG	MD Language Table for BI
F1_MD_BI_TBL_FLD	MG	MD Field Table for BI
SC_ACCESS_CNTL	MG	User Group Access Control
SC_APP_SERVICE	MG	Application Service
SC_APP_SERVICE_L	MG	Application Service Language
SC_USR_GRP_PROF	MG	User Group Profile
CI_CURRENCY_CD	KP	Currency Code
CI_CURRENCY_CD_L	KP	Currency Code Language
CI_DISP_PROF	KP	Display Profile
CI_DISP_PROF_L	KP	Display Profile Language
CI_TIME_ZONE	KP	Time Zone
CI_TIME_ZONE_L	KP	Time Zone Language
CI_USR_PORTAL	KP	User Portal
CI_XAI_JNDI_SVR	KP	XAI JNDI Server
CI_XAI_JNDI_SVR_L	KP	XAI JNDI Server Language

Table Name	Upgrade Action	Description
CI_XAI_OPTION	KP	Message Option
CI_XAI_SENDER	KP	Message Sender
CI_XAI_SENDER_L	KP	Message Sender Language
CI_XAI_SNDR_CTX	KP	Message Sender Context
F1_BUS_OBJ_STATUS_RSN_CHAR	KP	Status Reason Characteristic
F1_INSTALLATION	KP	Installation Option - Framework
SC_USER	KP	User
SC_USER_CHAR	KP	User Characteristic
SC_USER_GROUP	KP	User Group
SC_USER_GROUP_L	KP	User Group Language
SC_USR_GRP_USR	KP	User Group User
CI_MD_ATT_TY	RF	MD Element Attribute Type
CI_MD_AT_DTL	RF	MD Element Attribute Type Detail
CI_MD_AT_DTL_L	RF	MD Element Attribute Type Detail Language
CI_MD_CTL	RF	Generator Control
CI_MD_CTL_L	RF	Generator Control Language
CI_MD_CTL_TMPL	RF	Generator Control Template
CI_MD_ELTY	RF	MD Element Type
CI_MD_ELTY_AT	RF	Element Type Attributes
CI_MD_ELTY_L	RF	Element Type Language
CI_MD_LOOKUP_F	RF	MD Lookup Field
CI_MD_MSG	RF	MD Message
CI_MD_MSG_L	RF	MD Message Language
CI_MD_PDF	RF	Predefined Fields
CI_MD_PDF_VAL	RF	Predefined Values
CI_MD_SRC_TYPE	RF	Source Type
CI_MD_SRC_TYPE_L	RF	Source Type Language
CI_MD_TMPL	RF	Template
CI_MD_TMPL_ELTY	RF	Template Element Types
CI_MD_TMPL_L	RF	Template Language
CI_MD_TMPL_VAR	RF	Template Variable

---

<b>Table Name</b>	<b>Upgrade Action</b>	<b>Description</b>
CI_MD_TMPL_VAR_L	RF	Template Variable Language
CI_MD_VAR	RF	Variable
CI_MD_VAR_DTL	RF	Variable Detail
CI_MD_VAR_DTL_L	RF	Variable Detail Language
CI_XAI_EXECUTER	RF	XAI Executer
CI_XAI_EXECUTER_L	RF	XAI Executer Language
CI_XAI_FORMAT	RF	XAI Format
CI_XAI_FORMAT_L	RF	XAI Format Language
F1_LGCY_OBJ	RF	Unsupported Metadata