

Installer Decentralized setup
Oracle FLEXCUBE Installer
Release 14.4.0.0.0
[May] [2020]



Table of Contents

1.	PROPERTY FILE CREATION FOR DECENTRALIZED VIA ORACLE FLEXCUBE INSTALLER	1-1
1.1	INTRODUCTION	1-1
1.2	CREATING PROPERTY FILE	1-1
2.	LOADING OBJECTS INTO HOST & DC SCHEMA VIA FLEXCUBE INSTALLER	1-1
2.1	INTRODUCTION	1-1
2.2	LOADING OBJECTS INTO HOST & DC SCHEMA	1-1
3.	DECENTRALIZED APPLICATION SETUP (VIA WEBLOGIC)	1-1
3.1	INTRODUCTION	1-1
3.2	APPLICATION SETUP	1-1
3.2.1	<i>.ear and war file creation</i>	<i>1-1</i>
3.2.2	<i>Deploying .ear file in WebLogic server</i>	<i>1-1</i>
3.2.3	<i>Deploying .war file in WebLogic server</i>	<i>1-4</i>

1 Property File creation for Decentralized via Oracle FLEXCUBE Installer


1.1 Introduction

This chapter explains the steps to create property file for Oracle Decentralized FLEXCUBE Installer Application. Two property files are created fubs property file and environment property file.

1.2 Creating Property File

To create the property file for Oracle Decentralized FLEXCUBE, follow the steps given below:

1. Launch Oracle FLEXCUBE Installer bat file i.e. **FCUBSInstaller.bat** for Windows, for linux run FCUBSInstaller.sh.

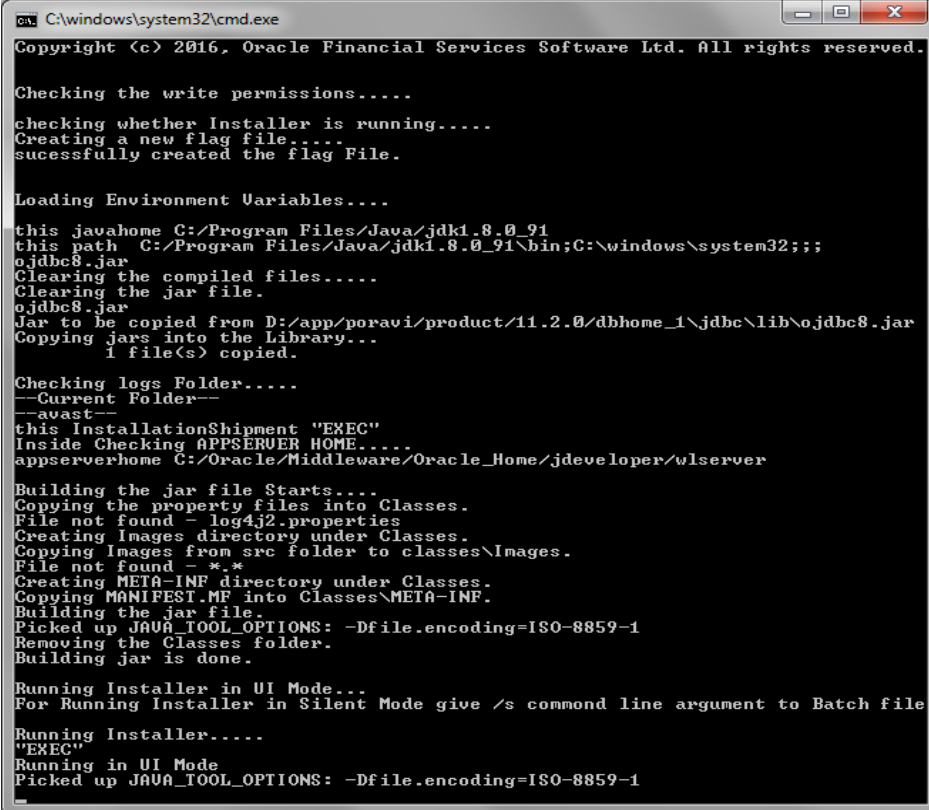

```
C:\windows\system32\cmd.exe
Copyright (c) 2016, Oracle Financial Services Software Ltd. All rights reserved.

Checking the write permissions.....
checking whether Installer is running.....
Creating a new flag file.....
sucessfully created the flag File.

Loading Environment Variables....
this javahome C:/Program Files/Java/jdk1.8.0_91
this path C:/Program Files/Java/jdk1.8.0_91\bin;C:\windows\system32;;;
ojdbc8.jar
Clearing the compiled files.....
Clearing the jar file.
ojdbc8.jar
Jar to be copied from D:/app/poravi/product/11.2.0/dbhome_1\jdbc\lib\ojdbc8.jar
Copying jars into the Library...
1 file(s) copied.

Checking logs Folder.....
--Current Folder--
avast
this InstallationShipment "EXEC"
Inside Checking APPSERUER HOME.....
appserverhome C:/Oracle/Middleware/Oracle_Home/jdeveloper/wlserver

Building the jar file Starts....
Copying the property files into Classes.
File not found - log4j2.properties
Creating Images directory under Classes.
Copying Images from src folder to classes\Images.
File not found - *.*
Creating META-INF directory under Classes.
Copying MANIFEST.MF into Classes\META-INF.
Building the jar file.
Picked up JAVA_TOOL_OPTIONS: -Dfile.encoding=ISO-8859-1
Removing the Classes folder.
Building jar is done.

Running Installer in UI Mode...
For Running Installer in Silent Mode give /s command line argument to Batch file
Running Installer.....
"EXEC"
Running in UI Mode
Picked up JAVA_TOOL_OPTIONS: -Dfile.encoding=ISO-8859-1
```

Need to provide the following details:

JAVA HOME PATH

Provide the JDK home path with the latest version.

ORACLE HOME PATH


Provide the Oracle 12C Client Path.

APPSERVER PATH

Provide the Application Server Path.

After providing these details, INSTALLER-GUI gets generated. And follow the below details.

Enter the following details

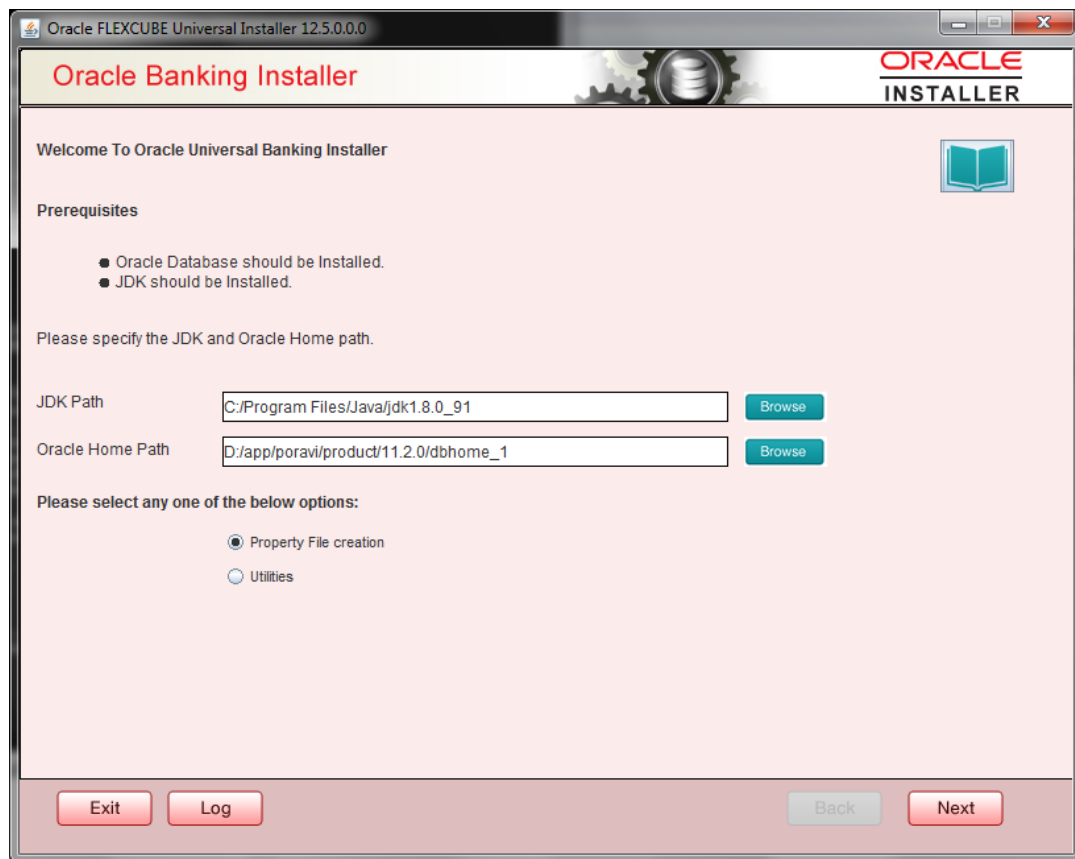

JDK Path:

Maintain Home folder path of JDK1.8

Oracle Home

Maintain home folder path of Oracle Client or Database

Application Server Home

Maintain home folder path of Application Server

2. Click 'Next' and the following screen is displayed.

Components

Choose components as INFRA.

Product Processors

Choose product processors as Oracle FLEXCUBE Universal Banking.

Plugins

Select Branch and Decentralized option to load objects related to Decentralized.

Scheduler can be embedded.

Oracle FLEXCUBE Universal Installer 12.5.0.0.0

Oracle Banking Installer

Select one of the Components

Load Existing Property File

☒ INFRA ☐ Scheduler ☐ Gateway ☐ Switch Interface Installation

Select Oracle Product Processors

☒ Oracle FLEXCUBE Universal Banking

☐ Oracle FLEXCUBE Enterprise Limits and Collateral Management

☐ Oracle Banking Payments

☐ Oracle Banking Corporate Lending ☐ Open Development Tool

Select Plugins to be Installed

☒ Branch Load Existing Branch Property File

Host Address ☐ BPEL ☒ Scheduler

☐ Reports ☐ OFTW ☐ FGL ☐ ELCM Adapter required

☐ DMS ☐ FIS-HOST ☐ Insulation

3. Click 'Next' and the following screen is displayed:

Specify SMS and Host schema details, Test connection to assure schema details provided are proper.

Oracle FLEXCUBE Universal Installer 12.5.0.0.0

Oracle Banking Installer

SMS Schema Details

Name	Value
Username	DCHOST5
Password	*****
Service Name	FCPDBDC
IP Address	whf00blr.in.oracle.com
Port	1522
TNS Connect Descriptor	FCPDBDC

Entity Schema Details ☐ Same as SMS Schema

Entity Id: JNDI Name:

Name	Value
Username	DCHOST5
Password	*****
Service Name	FCPDBDC
IP Address	whf00blr.in.oracle.com
Port	1522
TNS Connect Descriptor	FCPDBDC

☐ Compile in All Entities

- Click 'Next' and the following screen is displayed:

Provide Branch schema details and SMS schema details to create dblinks between two schemas.

Click on Test Connection to assure the connection details provided are proper.

Oracle FLEXCUBE Universal Installer 12.5.0.0.0

Oracle Banking Installer

Branch Schema Installation
Provide Branch schema details.

Name	Value
Username	DCBRANCH1
Password	••••••••
Service Name	FCPDBDC
IP Address	whf00blr.in.oracle.com
Port	1522
TNS Connect Descriptor	FCPDBDC
Branch (use ',' for multiple branches)	ALL
Addition of branch	N
SMS_DBLINK Username	DCHOST5
SMS_DBLINK Password	••••••
SMS_DBLINK Service Name	FCPDBDC

[Test Connection](#)

[Exit](#) [Log](#) [Back](#) [Next](#)

- Click 'Next' and the following screen is displayed:

EAR Name

Specify a name for the Application to be deployed.

You cannot use special characters such as '.' (Dot), ',' (comma), '\$' etc. However, you may use '_' (underscore). – Applicable for both Windows and Linux.

Context Name

Based on the Application type selected, the Installer displays the application context. However,

You may modify the default value.

Application Server

Specify the application server in which you are creating the property file. Select the appropriate one from the adjoining drop-down list.

Source Path

Provide the source path maintained.

Source Path

Provide the source path maintained.

Ear Destination Path

Provide the Ear destination path to place the generated .ear and .war file during generation of .ear and .war files.

Oracle FLEXCUBE Universal Installer 12.5.0.0.0

Oracle Banking Installer **ORACLE INSTALLER**

Provide Environment details.

EAR Name: FCUBS

Context Name: FCJNeoWeb

File Separator Style: Linux

Application Server: Weblogic

☐ External JSUIXML Required

☐ External PropertyFile Required

Application Server Path: C:\Oracle\Middleware\Oracle_Home\jdeveloper\wserver **Browse**

Source Path: C:\Work\poorna12_5IDCHOST2\Console_EXEC\Console_EXEC **Browse**

Ear Destination Path: poorna12_5IDCHOST2\PROPERTY_FILE_CREATION_20_NOV_2017 **Browse**


External JSUIXML Path: **Browse**

External PropertyFile Path: **Browse**

Exit Log Back Next

6. Click 'Next' to continue and following screen is displayed:

'Security Key for Encryption Logic' is the key (exact 16 characters) for all encryption logic.

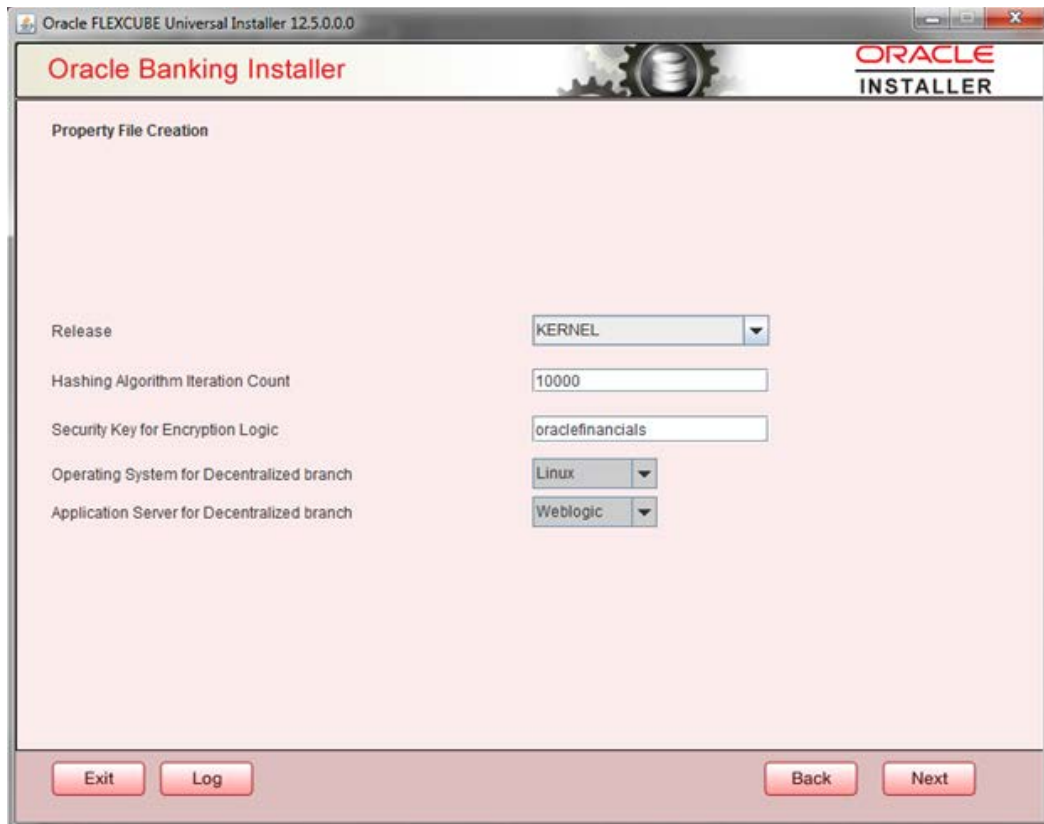

7. Click 'Next' to continue and following screen is displayed:

Datasources:

- | | |
|-----------------------|---|
| SMS Data Source | – Provide proper JNDI names e.g.: jdbc/fcjsmsDS |
| Branch Data Source | – Provide proper JNDI names e.g.: jdbc/fcjDevXADS |
| Scheduler Data Source | – Provide proper JNDI names e.g.: jdbc/fcjSchedulerDS |
| Host Server URL | – Host URL to establish connection from Branch. |

Oracle FLEXCUBE Universal Installer 12.5.0.0.0

Oracle Banking Installer **ORACLE INSTALLER**

Property File Creation - DataSource

Please enter DataSource Names

SMS Data Source: jdbc/fcjsmsDS

Branch Data Source: jdbc/fcjDevXADS

Scheduler Data Source: jdbc/fcjSchedulerDS

ELCM Data Source: jdbc/FcjDevDSElcm

PM Online JNDI: jdbc/fcjpmDS

PM Batch JNDI: jdbc/fcjpmDS

Webservices Provider URL: t3://localhost:7001/

Host Server URL: https://whf00bey.in.oracle.com:8204/FCJNeoWeb

Standalone Scheduler URL: https://10.10.10.10:7001/FCJNeoWeb

Exit Log Back Next

8. Click 'Next' to continue and following screen is displayed:

Debug Logs Required

If you require debug option, select 'Yes' from the drop-down list. If you do not require debug option, select 'No'.

Work Area

Specify the work area.

For example: D:\BrnDbgs\

Signature Path

Specify the location at which the signature images are placed.

Excel Path

Specify the location at which the excel files are generated.

Data Source

Specify the JNDI location. The standard format is 'jdbc/fcjdevDS'.

Request Time Out

Specify the database request timeout value in milli seconds. This is the maximum number of seconds the database waits for a query to return the result.

Connection Time Out

Specify the database connection timeout value in seconds. This is the maximum number of seconds the application waits for a connection to the database to open.

Session Time Out

Enter the session time out value in seconds. This is the maximum number of seconds during which the application gets active without any user intervention. If there is no user intervention continuously for the duration specified here, the user session gets expire.

LOV Fetch Required

If you check this box, the option lists in Oracle FLEXCUBE displays the matching values based on the first characters that you enter in a field. If you specify the first three characters of a value to be entered in an option list and tab out, the system displays the complete list of values that are matching the first three characters.

If you do not check this, option lists does not show the matching values based on the first few characters. You need to specify the complete value against the field.

Max Image Size

Specifies the maximum image size that can be uploaded. The default size is 1048576 in bytes.

CSS Style

Specify the CSS style to be used from the adjoining drop down list. You can select one of the following CSS styles:

Default – select this to apply the default style provided along with Oracle FLEXCUBE

Custom – select this to apply a custom style

Name

Specify the name of the CSS style.

Oracle FLEXCUBE Universal Installer 12.5.0.0.0

Oracle Banking Installer

Property File Creation - General Property

Debug Logs Required ☐ LOV Fetch Required ☐ External LOV Required

Work Area

Signature Path

Excel Path

Request Time Out In milli seconds

Connection Time Out In Seconds

Session Time Out In Seconds

Max Image Size In Bytes

User Batch Time In Hours

Css Style

Language

Name

ISO Code

Application Title

Version

Copyrights

- Click 'Next' and the following screen is displayed:

SSO Required

Check this box to enable single sign-on (SSO). If you check this box, you need to enter the SSO Key.

SSO Key

Specify the SSO key. If you have checked the box 'SSO Required, it is mandatory to specify the SSO key.

OPSS

OPSS is available only for weblogic and is not supported for Websphere.

IF OPSS available is checked for weblogic the symmetric key is not stored in the property file for security reasons.

Oracle FLEXCUBE Universal Installer 12.5.0.0.0

Oracle Banking Installer

Property File Creation - Single Sign on

SSO Required ☐ SSO Type **DEFAULT**

SSO KEY **DN**

Authentication details maintained external to FLEXCUBE

External Password Required ☐ Authentication Type **MSAD**

External User Login Required ☐

☒ OPSS Available

Option to provide LDAP server details

No.	Name	Value
1	LDAP SERVER URL	LDAP://10.10.10.10:111
2	LDAP SSL ENABLED	<input type="checkbox"/>
3	SECURITY AUTHENTICATION TYPE	Simple
4	DOMAIN NAME	I-FLEX.COM
5	LDAP SERVER TIMEOUT	0

Option to provide SAML details

No.	Name	Value
1	SAML CERTIFICATE PATH	D:\Security\SAML_Implementation\TestFiles\cert\certstore\b...
2	SAML CERTIFICATE PASSWORD	*****
3	SAML CERTIFICATE ALIAS	barc
4	SAML VALID AUDIENCE	bPAID_BWSIT

Exit Log Back Next

10. Click 'Next' and the following screen is displayed:

Specify the Mail configuring following details:

Oracle FLEXCUBE Universal Installer 12.5.0.0.0

Oracle Banking Installer

Property File Creation - SMTPS/Branch/DMS

Option for Mail configuring using SMTPS Protocol.

No.	Name	Value
1	Host	samplename.mail.com
2	User Id	infra
3	User Password	••••••
4	JNDI Name	mail/FCUBSMail

Option for modifying the Branch properties.

No.	Name	Value
1	Date Separator	-
2	WorkFlow Frequency	6000
3	Compress Request	<input checked="" type="checkbox"/>

Option for modifying the DMS/IPM property values.

No.	Name	Value
1	Login Service Address	http://10.10.10.10:1010/imaging/ws/LoginService
2	Document Service Address	http://10.10.10.10:1010/imaging/ws/DocumentService
3	Document Content Service Address	http://10.10.10.10:1010/imaging/ws/DocumentContentService
4	IPM User Name	testuser
5	IPM Password	••••••

Exit Log Back Next

11. Click 'Next' and the following screen is displayed:

Provide Scheduler Queue details.

Oracle FLEXCUBE Universal Installer 12.5.0.0.0

Oracle Banking Installer

ORACLE INSTALLER

Property File Creation - Scheduler Queues

Option for configuring Scheduler Destination Queue

Notify Destination: **QUEUE**

Queue Name: **NOTIFY_DEST_QUEUE**

Queue Connection Factory: **NotifyDestQCF**

☐ Secure Caller ID:

Caller Password:

Notify Queue Location: **Internal**

Option for configuring Scheduler Deferred Queue

Notify Deferred Queue Name: **DEFERRED_DEST_QUEUE**

Deferred Queue Connection Factory: **DeferredDestQCF**

☐ Secure Caller ID:

Caller Password:

Option for configuring Scheduler Notify Internal Queue

Notify Queue Name: **NOTIFY_QUEUE**

Dead Letter Queue Name: **NOTIFY_QUEUE_DLQ**

Notify Queue Connection Factory: **NOTIFY_MDB_QCF**

☐ Secure Caller ID:

Caller Password:

Option for configuring Log Rotation Interval

Scheduler Log Rotation Interval: **WEEKLY**

Option for External Server configuration for Destination Queue.

No.	Name	Value
1	Provide Url	iiop://localhost:1010
2	Security Principal	*****
3	Security Credential	*****

Exit Log Back Next

12. Click 'Next' and the following screen is displayed:

Provide Scheduler EMS Queue details.

Outgoing Queue Provider URL – It can be Host server URL.

Queue Principal – It should be weblogic login username.

Queue Credential – It should be weblogic login password.

Oracle FLEXCUBE Universal Installer 12.5.0.0.0

Oracle Banking Installer

ORACLE
INSTALLER

Property File Creation - Scheduler EMS Queue

No.	Name	Value
1	Incoming Dead Letter Queue Name	EMS_QUEUE_DLQ
2	Incoming backup Queue Name	EMS_QUEUE_BACK
3	Incoming Queue Connection Factory	EmsQcf
4	Secure Incoming Queue Connection	<input type="checkbox"/>
5	Incoming Queue Caller Id	
6	Incoming Queue Caller Password	
7	Outgoing Dead Letter Queue Name	EMS_QUEUE_DLQ
8	Outgoing Queue Connection Factory	EmsQcf
9	Secure Outgoing Queue Connection	<input type="checkbox"/>
10	Outgoing Queue Caller Id	
11	Outgoing Queue Caller Password	
12	Outgoing Queue Provider Url	t3://whf00bey.in.oracle.com:8204
13	Queue Principal
14	Queue Credential
15	Incoming Queue Name	EMS_INQUEUE
16	Outgoing Queue Name	EMS_OUTQUEUE
17	SFMS Incoming Queue	SFMS_INQUEUE
18	RTGS Incoming Queue	RTGS_INQUEUE
19	EMS Bulker Queue	BULKER_QUEUE

Exit Log Back Next

13. Click 'Next' and the following screen is displayed:

Provide EMS FTP/FTPS details

Oracle FLEXCUBE Universal Installer 12.5.0.0.0

Oracle Banking Installer

Property file Creation - EMS FTP/FTPS
Option for Scheduler EMS FTP/FTPS configuring.

No.	Name	Value
1	File TranferMode FTPS	FTPS
2	Server	10.10.10.10
3	User id	OFSS
4	Password	••••••••
5	File Type	.txt
6	Swift Format	1
7	Swift Message Delimiter	<input checked="" type="checkbox"/>
8	Swift Message Terminator	<input checked="" type="checkbox"/>
9	MEDIA	SWIFT

Option for EMS -Structured Financial Messaging System configuration

No.	Name	Value
1	Signature Block	<input checked="" type="checkbox"/>
2	Keystore File Name	/keystore
3	Keystore Alias name	•••••
4	keystore Password	•••••

Exit Log Back Next

14. Click 'Next' and the following screen is displayed:

Provide Scheduler BIP Advice report configuration details.

Oracle FLEXCUBE Universal Installer 12.5.0.0.0

Oracle Banking Installer

**ORACLE
INSTALLER**

Property File Creation - Scheduler BIP/GI Upload Queue

Option for configuring Scheduler BIP and BIP Advice report.

Bip Queue Name: INTERNAL_BIPREPORT_QUEUE

Bip DeadLetter Queue Name: INTERNAL_BIP_QUEUE_DLQ

BipAdvice Queue Name: ERNAL_BIPADVREPORT_QUEUE

BipAdvice DeadLetter Queue Name: RNAL_BIP_ADVICE_QUEUE_DLQ

Queue connection factory: BIPQCF

☐ Secure Caller ID:

Caller password:

Option for configuring details for Scheduler GI Upload Queue

Queue Name: INTERNAL_GI_UPLOAD_QUEUE

Dead Letter Queue Name: INTERNAL_GI_UPLOAD_DLQ

Queue connection factory: GI_UPLOAD_QCF

☐ Secure Caller ID:

Caller Password:

Exit Log Back Next

15. Click 'Next' and the following screen is displayed:

Provide Scheduler BI publish report configuration details.

Oracle FLEXCUBE Universal Installer 12.5.0.0.0

Oracle Banking Installer

Property File Creation - Reports

Option for modifying the Oracle BI Publisher properties.

No.	Name	Value
1	Server End Point	http://10.10.10.10:0101/xmlpserver/services/X2/ReportService?wsdl
2	Name Space	http://xmlns.oracle.com/oxp/service/PublicReportService
3	User Name	Administrator
4	Password	*****
5	Reports Advice Spool Path	/ReportsSpool
6	Advice Type	NATIVE
7	BIP Server Version	12c
8	BIP Time Zone	IST

Option for modifying the OBIEE and other property values

OBIEE ENABLED


OBIEE URL

OBIEE FOLDER

OBIEE SIGNOUT URL

Exit Log Back Next

16. Click 'Next' and the following screen is displayed

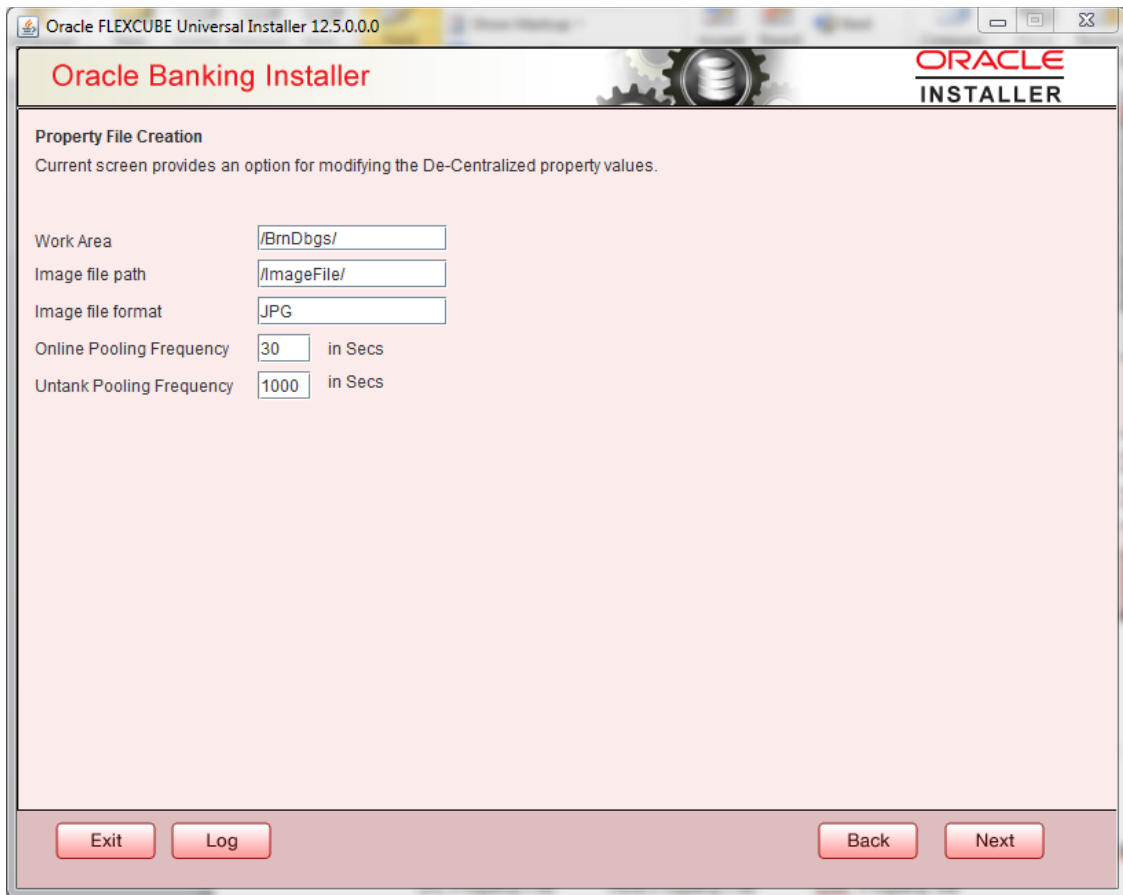

Provide the details for de-centralized work area, image file path, image file format, online pooling frequency and untank pooling frequency.

17. Click 'Next' and the following screen is displayed

Click on save property file will be built with latest properties.

Property files can be saved in a particular location and can be used for subsequent processing.

Both DC and Host property files, are saved inside property file save location under folder names - DC and HOST respectively.

Enclosed sample files for reference. Checkpoint: INIT_DATASOURCE in fcubs.properties

DC Property File



fcubs.properties

Host Property File





fcubs.properties

Env. Property file



env.properties

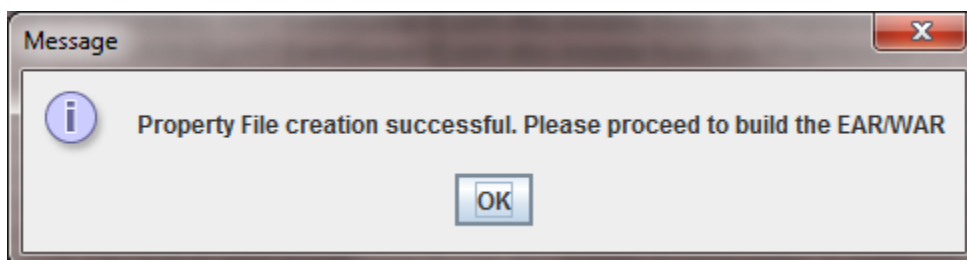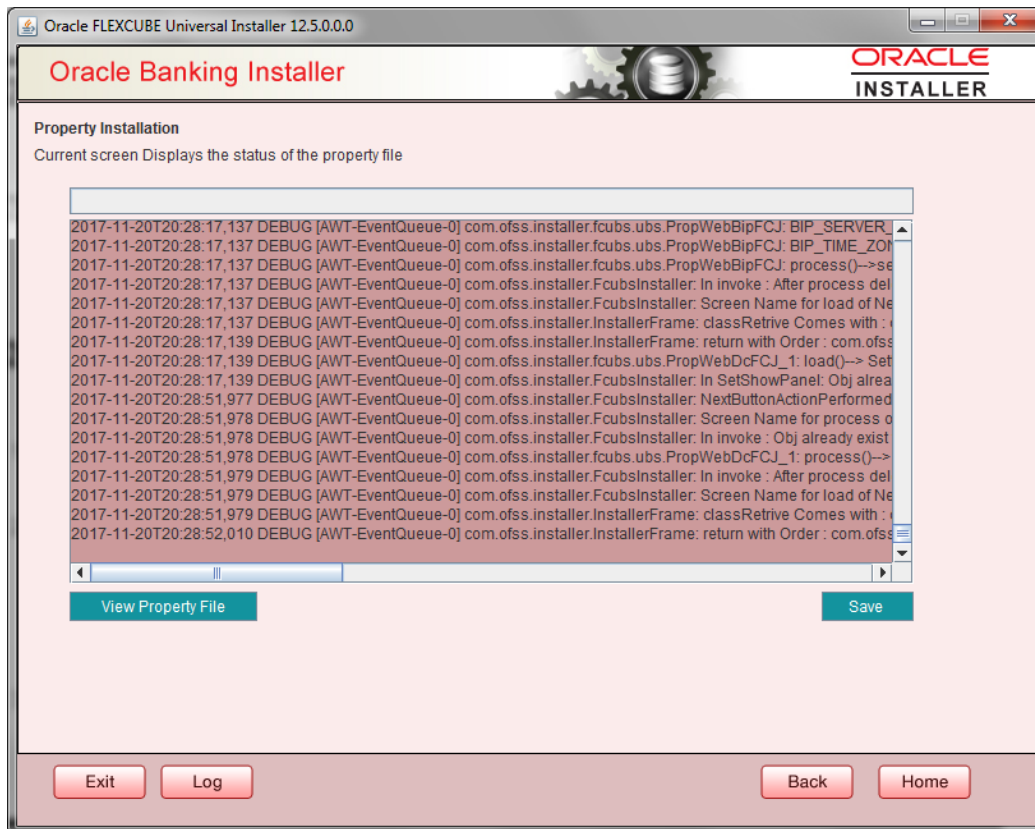

Once property file creation is completed, env.properties file will also be updated in path `INSTALLER\SOFT\GUI\logs` and `\INSTALLER\SOFT\logs`. Please note that values from `\INSTALLER\SOFT\logs\env.properties` will be taken for further steps. env.properties file is updated automatically with DC and Host property file paths generated already. Please verify these paths before proceeding.

2. Loading objects into Host & DC schema via FLEXCUBE Installer

2.1 Introduction

This chapter explains the steps to load objects into Decentralized schema using FLEXCUBE Installer. Note: Before running DB Compilation of any sort, please make sure that System Date Time format and language are provided as English, or otherwise DB Compilation might fail due to improper log names.

2.2 Loading Objects into Host & DC Schema

Before loading objects into the host and DC schema, please make sure you have atleast 10 GB SYSTEM tablespace in the database instance, and atleast 5 GB space in each schema. To load objects into Host and Decentralized schema, follow the steps given below:

1. env.properties generated in \INSTALLER\SOFT\logs path will be considered for all the database details.
2. Execute Oracle SMS DB Compiler silent Installer bat file i.e. **SMSDBCompileRun.bat** for Windows, for linux run SMSDBCompileRun.sh.

After execution is completed, Host schema should be loaded with Host objects. Invalid count should be zero after execution. Note: Invalid procedure [PR_INSTLR_POST_IMPORT](#) can be ignored.

RECOMPILATION SCRIPT




fast.sql

In case invalid count is greater than zero, fast.sql can be used for invalid re-compilation. Number of threads, and schema name has to be provided as input for the recompilation to happen, e.g. Threads = 8, Schema=DCHOST5

3. Execute Oracle Host DB Compiler silent Installer bat file i.e. **ROFCDBCompileRun.bat** for Windows, for linux run ROFCDBCompileRun.sh.

After execution is completed, Host schema should be loaded with Host objects. Invalid count should be zero after execution. If not, please run recompilation script(fast.sql) provided earlier.

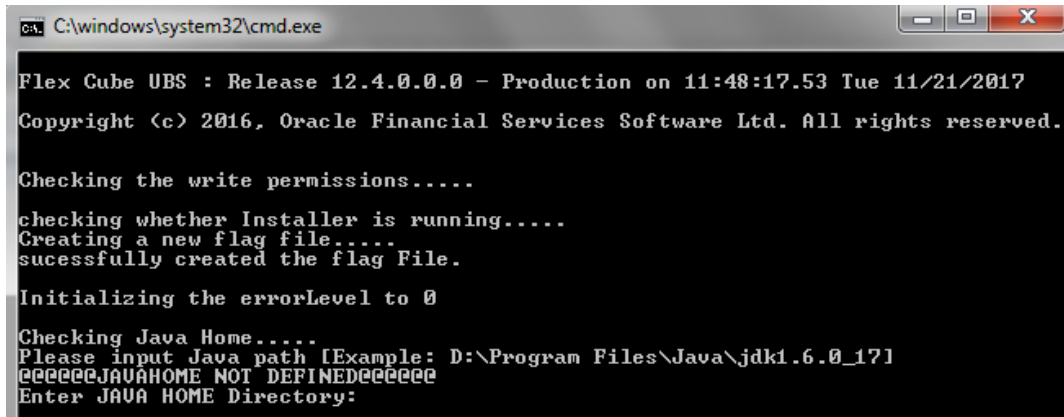A screenshot of a Windows command prompt window titled "C:\windows\system32\cmd.exe". The window has a black background with white text. The text shows the following sequence of operations: "Flex Cube UBS : Release 12.4.0.0.0 - Production on 11:48:17.53 Tue 11/21/2017", "Copyright (c) 2016, Oracle Financial Services Software Ltd. All rights reserved.", "Checking the write permissions.....", "checking whether Installer is running.....", "Creating a new flag file.....", "sucessfully created the flag File.", "Initializing the errorLevel to 0", "Checking Java Home.....", "Please input Java path [Example: D:\Program Files\Java\jdk1.6.0_17]", "*****JAVAHOME NOT DEFINED*****", and "Enter JAVA HOME Directory:". The window has standard Windows window controls (minimize, maximize, close) in the top right corner.

```
C:\windows\system32\cmd.exe

Flex Cube UBS : Release 12.4.0.0.0 - Production on 11:48:17.53 Tue 11/21/2017
Copyright (c) 2016, Oracle Financial Services Software Ltd. All rights reserved.

Checking the write permissions.....

checking whether Installer is running.....
Creating a new flag file.....
sucessfully created the flag File.

Initializing the errorLevel to 0

Checking Java Home.....
Please input Java path [Example: D:\Program Files\Java\jdk1.6.0_17]
*****JAVAHOME NOT DEFINED*****
Enter JAVA HOME Directory:
```

At this point, Day-0 Setup should be done for the Host schema(if not done yet, document [FCUBS_DB_Setup](#) can be followed for the same, section 1.3.2).

Check point: In SSTB_USER table Home Entity should be updated properly after Day-0 setup.

4. Execute Oracle Branch DB Compiler silent Installer bat file
i.e.**ROFCBranchDBCompileRun.bat** for Windows, for linux run
ROFCBranchDBCompileRun.sh.

After execution is completed, DC schema should be loaded with DC objects. Invalid count should be zero. If not, please run recompilation script(fast.sql) provided earlier for branch schema(with branch schema name as input)

3. Decentralized Application setup (via WebLogic)


3.1 Introduction

This chapter explains the steps to setup application in WebLogic server. This includes creation and deployment of EAR and WAR files in WebLogic server. EAR and WAR has to be deployed in HOST as well as BRANCH respectively.

3.2 Application Setup

3.2.1 .ear and war file creation

1. Execute Oracle Ear creation bat, silent Installer bat file i.e. **ROFCEarRun.bat** for Windows, for linux run **ROFCEarRun.sh**.

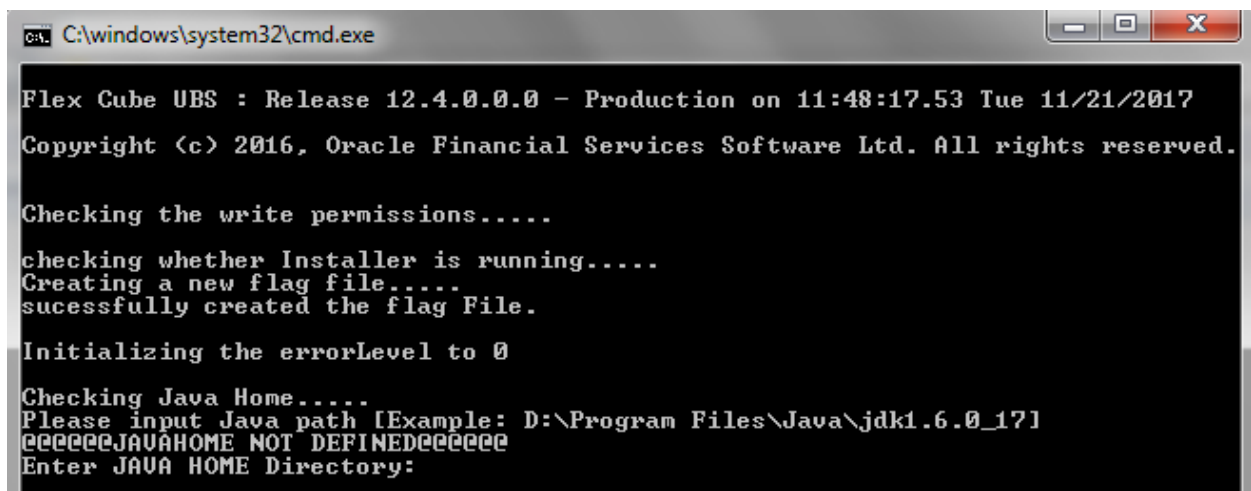

```
C:\windows\system32\cmd.exe
Flex Cube UBS : Release 12.4.0.0.0 - Production on 11:48:17.53 Tue 11/21/2017
Copyright (c) 2016, Oracle Financial Services Software Ltd. All rights reserved.

Checking the write permissions.....
checking whether Installer is running.....
Creating a new flag file.....
sucessfully created the flag File.

Initializing the errorLevel to 0

Checking Java Home.....
Please input Java path [Example: D:\Program Files\Java\jdk1.6.0_17]
#####JAVAHOME NOT DEFINED#####
Enter JAVA HOME Directory:
```

2. It creates .war file and .ear file.
3. Following check points to be verified after .ear and .war file creation.

web.xml file should be proper with xml tags. If not, it will result in servlet exceptions on deployment.

3.2.2 Deploying .ear file in WebLogic server

1. Set SSL port enabled. Go to Environment->Servers-> Select soa_server1(managed server). Make sure SSL Listen Port Enabled checkbox is checked.

Oracle WebLogic Server Administration Console 12c

Home Log Out Preferences Record Help

Welcome, weblogic Connected to: FCIES

Home > Summary of Servers > soa_server1

Settings for soa_server1

Configuration Protocols Logging Debug Monitoring Control Deployments Services Security Notes

General Cluster Services keystones SSL Federation Services Deployment Migration Tuning Overload Concurrency Health Monitoring Server Start Web Services Coherence

Click the **Lock & Edit** button in the Change Center to modify the settings on this page.

Save

Use this page to configure general features of this server such as default network communications.

View JNDI Tree

Name: soa_server1 An alphanumeric name for this server instance. [More Info...](#)

Template: (No value specified) [Change](#) The template used to configure this server. [More Info...](#)

Machine: Machine1 The WebLogic Server host computer (machine) on which this server is meant to run. [More Info...](#)

Cluster: (Stand-alone) The cluster, or group of WebLogic Server instances, to which this server belongs. [More Info...](#)

Listen Address: 10.184.157.96 The IP address or DNS name this server uses to listen for incoming connections. For example, enter 12.34.5.67 or mymachine, respectively. [More Info...](#)

☒ Listen Port Enabled Specifies whether this server can be reached through the default plain-text (non-SSL) listen port. [More Info...](#)

Listen Port: 8203 The default TCP port that this server uses to listen for regular (non-SSL) incoming connections. [More Info...](#)

☒ SSL Listen Port Enabled Indicates whether the server can be reached through the default SSL listen port. [More Info...](#)

SSL Listen Port: 8204 The TCP/IP port at which this server listens for SSL connection requests. [More Info...](#)

☐ Client Cert Proxy Enabled Specifies whether the HttpClusterServlet proxies the client certificate in a special header. [More Info...](#)

Java Compiler: javac The Java compiler to use for all applications hosted on this server that need to compile Java code. [More Info...](#)

Diagnostic Volume: Low Specifies the volume of diagnostic data that is automatically produced by WebLogic Server at run time. Note that the WLSDF diagnostic volume setting does not affect explicitly configured diagnostic modules. For example, this controls the volume of events generated for Flight Recorder. [More Info...](#)

Default Datasource: The JNDI name of a system resource data source used to override the default datasource. [More Info...](#)

Advanced

Save

Click the **Lock & Edit** button in the Change Center to modify the settings on this page.

2. Map Data source as follows

Oracle WebLogic Server Administration Console 12c

Home Log Out Preferences Record Help

Welcome, weblogic Connected to: FCIES

Home > Summary of Servers > soa_server1 > Summary of Deployments > Summary of Servers > Summary of Deployments > Summary of JDBC Data Sources > jdbc/fcjdev05

Settings for jdbc/fcjdev05

Configuration Targets Monitoring Control Security Notes

General Connection Pool Oracle ONS Transaction Diagnostic Identity Options

Click the **Lock & Edit** button in the Change Center to modify the settings on this page.

Save

Applications get a database connection from a data source by looking up the data source on the Java Naming and Directory Interface (JNDI) tree and then requesting a connection. The data source provides the connection to the application from its pool of database connections. This page enables you to define general configuration options for this JDBC data source.

Name: jdbc/fcjdev05 A unique name that identifies this data source in the WebLogic domain. [More Info...](#)

Datasource Type: GENERIC The data source type. Valid types are: [More Info...](#)

Scope: Global The scope in which the data source is available. [More Info...](#)

JNDI Name: jdbc/fcjdev05 The JNDI path to where this data source is bound. By default, the JNDI name is the name of the data source. [More Info...](#)

☐ Row Prefetch Enabled Enables multiple rows to be "prefetched" (that is, sent from the server to the client) in one server access. [More Info...](#)

Row Prefetch Size: 48 If row prefetching is enabled, specifies the number of result set rows to prefetch for a client. [More Info...](#)

Stream Chunk Size: 256 Specifies the data chunk size for streaming data types. [More Info...](#)

Save

Click the **Lock & Edit** button in the Change Center to modify the settings on this page.

WebLogic Server Version: 12.2.1.3.0
Copyright (c) 1996-2016, Oracle and/or its affiliates. All rights reserved.
Oracle is a registered trademark of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

Connection pool as follows,

URL:	<input type="text" value="jdbc:oracle:thin:@whf00blr.in.oracle.com:1522/FCPDBR2"/>	The URL of the database to connect to. The format of the URL varies by JDBC driver. More Info...
Driver Class Name:	<input type="text" value="oracle.jdbc.OracleDriver"/>	The full package name of JDBC driver class used to create the physical database connections in the connection pool. (Note that this driver class must be in the classpath of any server to which it is deployed.) More Info...
Properties:	<div>user=FC125R2</div>	The list of properties passed to the JDBC driver that are used to create physical database connections. For example: server=dbserver1. List each property=value pair on a separate line. More Info...
System Properties:	<div></div>	The list of System Properties names passed to the JDBC driver that are used to create physical database connections. For example: server=dbserver1. List each property=value pair on a separate line. More Info...
Encrypted Properties:	<div><div>Add Securely</div></div>	The list of encrypted Properties passed to the JDBC driver that are used to create physical database connections. For example: password=value. There are two ways to enter the values: You can enter several values at once but the encrypted values will be visible on the screen until you save the changes. To use this option, list each property=value pair on a separate line. Values entered will be encrypted when saved. To enter the information securely, save any other changes that you wish to make to this page and click on the Add Securely button. On the Add a new Encrypted Property page, enter the property name and masked value, and click OK. Repeat for additional encrypted property values. More Info...
Password:	<input type="password" value=""/>	The password attribute passed to the JDBC driver when creating physical database connections. More Info...
Confirm Password:	<input type="password" value=""/>	
Initial Capacity:	<input type="text" value="1"/>	The number of physical connections to create when creating the connection pool in the data source. If unable to create this number of connections, creation of the data source will fail. More Info...
Maximum Capacity:	<input type="text" value="100"/>	The maximum number of physical connections that this connection pool can contain. More Info...
Minimum Capacity:	<input type="text" value="1"/>	The minimum number of physical connections that this connection pool can contain after it is initialized. More Info...
Statement Cache Type:	<input type="text" value="LRU"/>	The algorithm used for maintaining the prepared statements stored in the statement cache. More Info...
Statement Cache Size:	<input type="text" value="10"/>	The number of prepared and callable statements stored in the cache. (This may increase server performance.) More Info...
Advanced		
<input type="button" value="Save"/>		

File Edit View Favorites Tools Help

ORACLE WebLogic Server Administration Console 12c

Welcome, weblogic Connected to: FC125DC

Change Center
View changes and restarts
Click the **Lock & Edit** button to modify, add or delete items in this domain.

Domain Structure
FC125DC
- Domain Partitions
- Partition Work Managers
- Environment
- Servers
- Clusters
- Coherence Clusters
- Resource Groups
- Resource Group Templates
- Machines
- Virtual Nodes
- Virtual Targets
- Work Managers
- Preconfigured Templates

How do I...
- Configure default network connections
- Create and configure machines
- Configure clusters
- Start and stop servers
- Configure WADP diagnostic volume
- Apply a server template

System Status
Health of Running Servers as of: 11:02 AM

<div></div>	Failed (0)
<div></div>	Critical (0)
<div></div>	Overloaded (0)
<div></div>	Warning (0)
<div></div>	OK (3)

Home Log Out Preferences Help

Home > Summary of Domain Partitions > Summary of Partition Work Managers > Summary of Servers > AdminServer


Settings for AdminServer
Configuration Protocols Logging Debug Monitoring Control Deployments Services Security Notes
General Cluster Services Keystores SSL Federation Services Deployment Migration Tuning Overload Concurrency Health Monitoring Server Start Web Services Coherence

Click the **Lock & Edit** button in the Change Center to modify the settings on this page.


Use this page to configure general features of this server such as default network communications.
View JNDI Tree

Name:	AdminServer	An alphanumeric name for this server instance. More Info...
Template:	(No value specified) <input type="button" value="Change"/>	The template used to configure this server. More Info...
Machines:	(None)	The WebLogic Server host computer (machine) on which this server is meant to run. More Info...
Cluster:	(Stand-Alone)	The cluster, or group of WebLogic Server instances, to which this server belongs. More Info...
Listen Address:	<input type="text" value="10.104.152.169"/>	The IP address or DNS name this server uses to listen for incoming connections. For example, enter 12.34.5.67 or mymachine, respectively. More Info...
<input checked="" type="checkbox"/> Listen Port Enabled		Specifies whether this server can be reached through the default plain-text (non-SSL) listen port. More Info...
Listen Port:	<input type="text" value="7201"/>	The default TCP port that this server uses to listen for regular (non-SSL) incoming connections. More Info...
<input checked="" type="checkbox"/> SSL Listen Port Enabled		Indicates whether the server can be reached through the default SSL listen port. More Info...
SSL Listen Port:	<input type="text" value="7202"/>	The TCP/IP port at which this server listens for SSL connection requests. More Info...
<input type="checkbox"/> Client Cert Proxy Enabled		Specifies whether the HttpClusterServlet proxies the client certificate in a special header. More Info...
Java Compiler:	<input type="text" value="javac"/>	The Java compiler to use for all applications hosted on this server that need to compile Java code. More Info...
Diagnostic Volume:	<input type="text" value="Low"/>	Specifies the volume of diagnostic data that is automatically produced by WebLogic Server at run time. Note that the WADP diagnostic volume setting does not affect explicitly configured diagnostic modules. For example, this controls the volume of events generated for Flight Recorder. More Info...
Default DataSources:	<input type="text" value=""/>	The JNDI name of a system resource data source used to override the default data source. More Info...

Set the Targets to both admin server and managed server, based on the application pointing to.

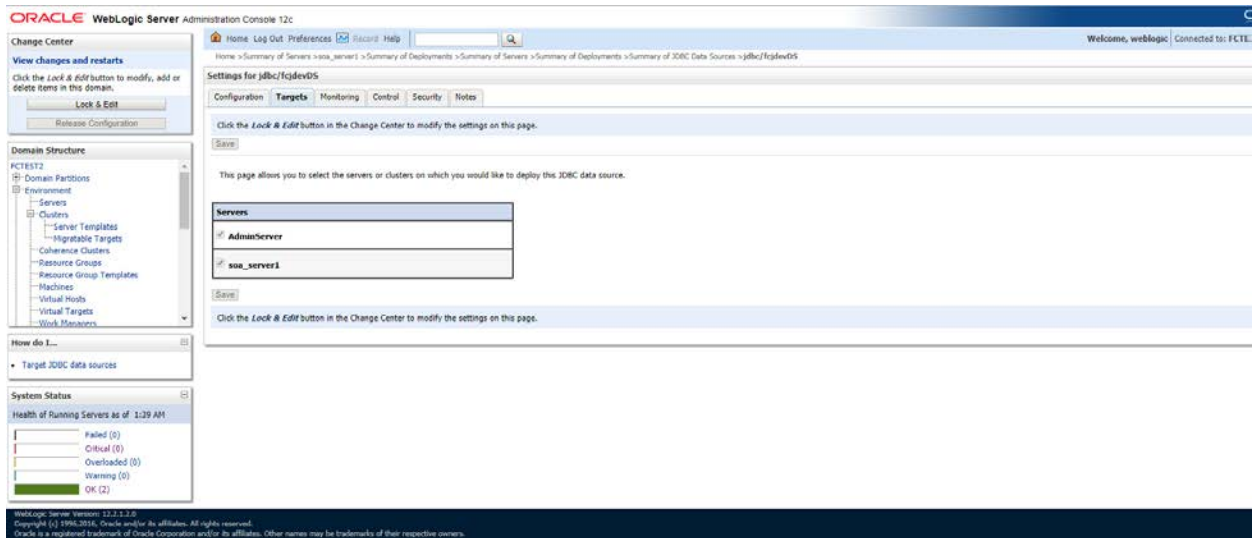

3. Install javax library first and then application EAR(.ear) as follows,

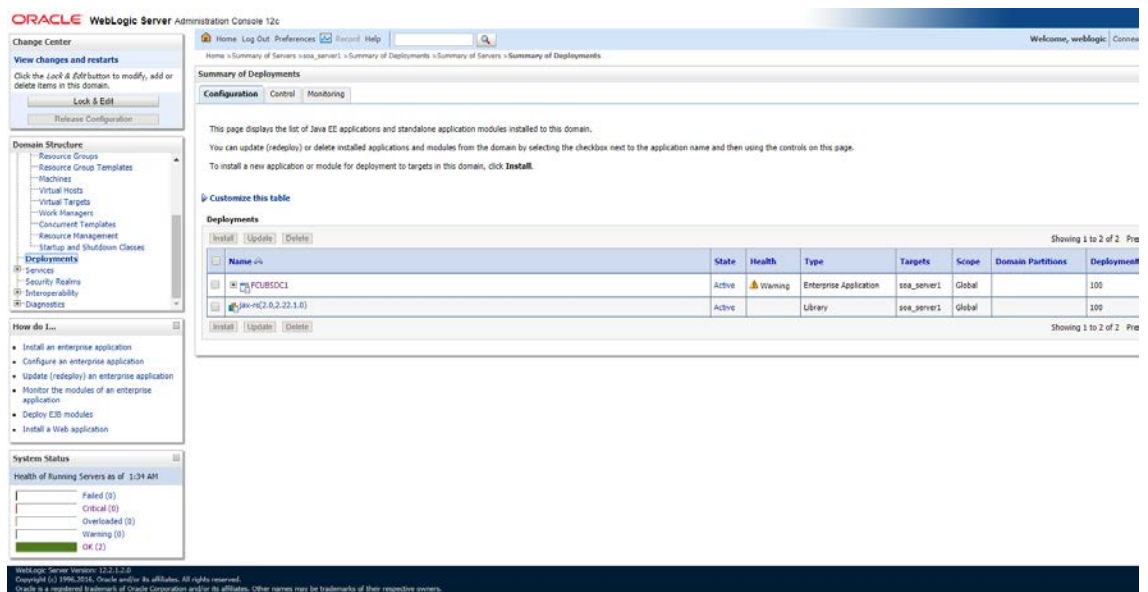

Start the server e.g.: FCUBSDC1 for first use.

Check Point: Maintain Day

0 Setup, RT related transactions should be completed successfully.

3.2.3 Deploying .war file in WebLogic server

1. Set SSL Port enabled.
2. Add Data Sources as follows.

ORACLE WebLogic Server Administration Console 12c

Welcome, weblogic | Connected to: FC12DC

Home | Log Out | Preferences | **Record** | Help

Home > Summary of Domain Partitions > Summary of Partition Work Managers > Summary of Servers > AdminServer > Summary of Servers > Summary of Deployments > Summary of JDBC Data Sources > jdbc/fgdev05branch

Settings for jdbc/fgdev05branch

Configuration | Targets | Monitoring | Control | Security | Notes

General | Connection Pool | Oracle | ONS | Transaction | Diagnostics | Identity Options

Click the **Lock & Edit** button in the Change Center to modify the settings on this page.

Save

Applications get a database connection from a data source by looking up the data source on the Java Naming and Directory Interface (JNDI) tree and then requesting a connection. The data source provides the connection to the application from its pool of database connections. This page enables you to define general configuration options for this JDBC data source.

Name:	jdbc/fgdev05branch	A unique name that identifies this data source in the WebLogic domain. More Info...
Data source type:	GENERIC	The data source type. Valid types are: More Info...
Scope:	Global	The scope in which the data source is available in. More Info...
JNDI Name:	jdbc/fgdev05branch	The JNDI path to where this data source is bound. By default, the JNDI name is the name of the data source. More Info...
Row Prefetch Enabled:	<input type="checkbox"/>	Enables multiple rows to be "prefetched" (that is, sent from the server to the client) in one server access. More Info...
Row Prefetch Size:	48	If row prefetching is enabled, specifies the number of result set rows to prefetch for a client. More Info...
Stream Chunk Size:	256	Specifies the data chunk size for streaming data types. More Info...

Click the **Lock & Edit** button in the Change Center to modify the settings on this page.

WebLogic Server Version: 12.2.1.2.0
Copyright (c) 1996,2014, Oracle and/or its affiliates. All rights reserved.
Oracle is a registered trademark of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

ORACLE WebLogic Server Administration Console 12c

Welcome, weblogic | Connected to: FC12DC

Home | Log Out | Preferences | **Record** | Help

Home > Summary of Domain Partitions > Summary of Partition Work Managers > Summary of Servers > AdminServer > Summary of Servers > Summary of Deployments > Summary of JDBC Data Sources > jdbc/fgdev05branch

Settings for jdbc/fgdev05branch

Configuration | Targets | Monitoring | Control | Security | Notes

General | **Connection Pool** | Oracle | ONS | Transaction | Diagnostics | Identity Options

Click the **Lock & Edit** button in the Change Center to modify the settings on this page.

Save

The connection pool within a JDBC data source contains a group of JDBC connections that applications reserve, use, and then return to the pool. The connection pool and the connections within it are created when the connection pool is registered, usually when starting up WebLogic Server or when deploying the data source to a new target.

Use this page to define the configuration for this data source's connection pool.

URL:	jdbc:oracle:thin:@fhs2311553.in.oracle.com:1521/FC	The URL of the database to connect to. The format of the URL varies by JDBC driver. More Info...
Driver Class Name:	oracle.jdbc.xa.client.OracleXADataSource	The full package name of JDBC driver class used to create the physical database connections in the connection pool. (Note that this driver class must be in the classpath of any server to which it is deployed.) More Info...
Properties:	server=FC12DC	The list of properties passed to the JDBC driver that are used to create physical database connections. For example: server=ds0001. List each property=value pair on a separate line. More Info...
System Properties:		The list of System Properties names passed to the JDBC driver that are used to create physical database connections. For example: server=ds0001. List each property=value pair on a separate line. More Info...
Encrypted Properties:		The list of encrypted Properties passed to the JDBC driver that are used to create physical database connections. For example: password=value. There are two ways to enter the values: You can enter several values at once but the encrypted values will be visible on the screen until you save the changes. To use this option, list each property=value pair on a separate line. Values entered will be encrypted when saved. To enter the information securely, save any other changes that you wish to make to this page and click on the Add Securely button. On the Add a new Encrypted Property page, enter the property name and masked value, and click OK. Repeat for additional encrypted property values. More Info...
Password:	*****	The password attribute passed to the JDBC driver when creating physical database connections. More Info...
Confirm Password:	*****	
Initial Capacity:	1	The number of physical connections to create when creating the connection pool in the data source. If unable to create this number of connections, creation of the data source will fail. More Info...

ORACLE WebLogic Server Administration Console 12c

Home Log Out Preferences Record Help

Welcome, weblogic Connected to: FC125

Change Center

View changes and restarts

Click the Lock & Edit button to modify, add or delete items in this domain.

Lock & Edit

Release Configuration

Domain Structure

- Domain Structure
 - Resource Groups
 - Resource Group Templates
 - Machines
 - Virtual Hosts
 - Virtual Targets
 - Work Managers
 - Concurrent Templates
 - Resource Management
 - Startup and Shutdown Classes
- Deployments
- Services
 - Interoperability
 - Data Sources

How do I...

- Create JDBC generic data sources
- Create JDBC GridLink data sources
- Create JDBC multi data sources
- Create UCP data sources
- Create Proxy data sources

System Status

Health of Running Servers as of 11:06 AM

Failed (0)

Critical (0)

Overloaded (0)

Warning (0)

OK (1)

Summary of JDBC Data Sources

Configuration Monitoring

A JDBC data source is an object bound to the JNDI tree that provides database connectivity through a pool of JDBC connections. Applications can look up a data source on the JNDI tree and then borrow a database connection from a data source. This page summarizes the JDBC data source objects that have been created in this domain.

Customize this table

Data Sources (Filtered - More Columns Exist)

Click the Lock & Edit button in the Change Center to activate all the buttons on this page.

Now Delete

Name	Type	JNDI Name	Targets	Scope	Domain Partitions
jdbc/fgdev05branch	Generic	jdbc/fgdev05branch	AdminServer	Global	

Showing 1 to 2 of 2 Previous Next

3. Install .war file generated and jax-rs.

ORACLE WebLogic Server Administration Console 12c

Home Log Out Preferences Record Help

Welcome, weblogic Connected to: FC125

Change Center

View changes and restarts

Click the Lock & Edit button to modify, add or delete items in this domain.

Lock & Edit

Release Configuration

Domain Structure

- Domain Structure
 - Resource Groups
 - Resource Group Templates
 - Machines
 - Virtual Hosts
 - Virtual Targets
 - Work Managers
 - Concurrent Templates
 - Resource Management
 - Startup and Shutdown Classes
- Deployments
- Services
 - Interoperability
 - Diagnostics

How do I...

- Install an enterprise application
- Configure an enterprise application
- Update (redploy) an enterprise application
- Monitor the modules of an enterprise application
- Deploy ESB modules
- Install a Web application

System Status

Health of Running Servers as of 11:36 AM

Failed (0)

Critical (0)

Overloaded (0)

Warning (0)

OK (1)

Summary of Deployments

Configuration Control Monitoring

This page displays the list of Java EE applications and standalone application modules installed to this domain.

You can update (redploy) or delete installed applications and modules from the domain by selecting the checkbox next to the application name and then using the controls on this page.

To install a new application or module for deployment to targets in this domain, click **Install**.

Customize this table

Deployments

Install Update Delete

Name	State	Health	Type	Targets	Scope	Domain Partitions	Deployment Order
FCUGAPP (12.4.0.0.0)	Active	OK	Web Application	AdminServer	Global		100
jax-rs(2.0.2.22.1.0)	Active		Library	AdminServer	Global		100

Showing 1 to 2 of 2 Previous Next

4. After deployment both DC server to be started for further use.



Installer Decentralized setup
[May] [2020]
Version 14.4.0.0.0

Oracle Financial Services Software Limited
Oracle Park
Off Western Express Highway
Goregaon (East)
Mumbai, Maharashtra 400 063
India

Worldwide Inquiries:
Phone: +91 22 6718 3000
Fax: +91 22 6718 3001
www.oracle.com/financialservices/

Copyright ©[2007], [2020], Oracle and/or its affiliates. All rights reserved.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate failsafe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

This software or hardware and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.