

Auto Categorization of Spend Transactions Guide
Oracle Banking Digital Experience
Release 22.2.0.0.0

Part No. F72987-01

November 2022

ORACLE®

Auto Categorization of Spend Transactions Guide
November 2022

Oracle Financial Services Software Limited
Oracle Park
Off Western Express Highway
Goregaon (East)
Mumbai, Maharashtra 400 063
India

Worldwide Inquiries:
Phone: +91 22 6718 3000
Fax:+91 22 6718 3001

www.oracle.com/financialservices/

Copyright © 2006, 2022, Oracle and/or its affiliates. All rights reserved.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are “commercial computer software” pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate failsafe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

This software or hardware and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

Table of Contents

1. Preface	1-1
1.1 Intended Audience.....	1-1
1.2 Documentation Accessibility	1-1
1.3 Access to Oracle Support.....	1-1
1.4 Structure	1-1
1.5 Related Information Sources	1-1
2. Auto Categorization Of Spend Transactions	2-1
3. Categorization Of Spend Transactions Using ML Engine	3-4

1. Preface

1.1 Intended Audience

This document is intended for the following audience:

- Customers
- Partners

1.2 Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

1.3 Access to Oracle Support

Oracle customers have access to electronic support through My Oracle Support. For information, visit

<http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit

<http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

1.4 Structure

This manual is organized into the following categories:

Preface gives information on the intended audience. It also describes the overall structure of the User Manual.

The subsequent chapters describes following details:

- Introduction
- Preferences & Database
- Configuration / Installation.

1.5 Related Information Sources

For more information on Oracle Banking Digital Experience Release 22.2.0.0.0, refer to the following documents:

- Oracle Banking Digital Experience Installation Manuals

2. Auto Categorization Of Spend Transactions

Scenario:

If a Spend transaction description contains keyword "Big Bazaar" then that transaction should get auto-categorized as follows:

Category --> Shopping

Subcategory --> Groceries

Maintenance steps:

1. Create a Category and a Subcategory as required after login as an Admin user.
2. Note the CATEGORY_ID column value of the newly created Category & Subcategory from the table DIGX_SP_SPEND_CATEGORY (Eg: 10 and 101 respectively).
3. Insert a row in table DIGX_RL_SPEND as below (Note the ID column value which is '10001' in this example).

Sample script:

```
insert into DIGX_RL_SPEND (ID, CREATED_BY, CREATION_DATE,
LAST_UPDATED_BY, LAST_UPDATED_DATE, OBJECT_STATUS,
OBJECT_VERSION_NUMBER, NAME, DESCRIPTION, DETERMINANT_VALUE)
values ('10001', '', sysdate , '', sysdate , '', 1, 'SpendRule',
'SpendDTODesc', 'OBDX_BU');
```

4. Insert a row in table DIGX_RL_CONDITION as below:
 - a. ID as any unique value
 - b. RULE_ID as provided in the DIGX_RL_SPEND table above
 - c. EXPRESSION_OBJECT value should contain the keyword as follows:

```
utl_raw.cast_to_raw('{
"@class" : "
com.ofss.digx.app.spendanalysis.dto.rule.SpendCategorizationExpressionFactValueDTO
",
"keyword" : "Big Bazaar"
}')
```
 - d. OUTCOME_OBJECT value should contain the corresponding Category & Subcategory ID as follows (Subcategory is NOT mandatory):

```
utl_raw.cast_to_raw('{
"@class" : "
com.ofss.digx.app.spendanalysis.dto.rule.SpendCategorizationOutcomeFactValueDTO",
"category" : "10",
"subCategory" : "101"
}')
```
 - e. OPERATOR value should be 'CONTAINS' (No other operators are supported out of the box)

Sample script:

```

insert into DIGX_RL_CONDITION (ID, RULE_ID, OPERATOR,
OUTCOME_OBJECT, EXPRESSION_OBJECT, CREATED_BY, CREATION_DATE,
LAST_UPDATED_BY, LAST_UPDATED_DATE, OBJECT_STATUS,
OBJECT_VERSION_NUMBER, DETERMINANT_VALUE)

values ('103', '10001', 'CONTAINS', utl_raw.cast_to_raw('{

"@class" :
"com.ofss.digx.app.spendanalysis.dto.rule.SpendCategorizationOutcomeFactVa
lueDTO",

"category" : "10",

"subCategory" : "101"

}'), utl_raw.cast_to_raw('{

"@class" :
"com.ofss.digx.app.spendanalysis.dto.rule.SpendCategorizationExpressionFac
tValueDTO",

"keyword" : "Big Bazaar"

}'), '', null, '', null, '', 1, 'OBDX_BU');

```

5. Insert such rows in table DIGX_RL_CONDITION for each keyword & Category-Subcategory combination as required by the Bank.
6. Verify the following properties (select * from DIGX_FW_CONFIG_ALL_B where category_id = 'ruleconfig'):
 - a. IS_RULE_EVALUATION_REQUIRED --> Y
 - b. SPEND_EVALUATOR --> com.ofss.digx.app.spendanalysis.ruleengine.evaluator.SpendRuleEvaluator (out of the box Spend rule evaluator)
 - c. SPEND_RULE_NAME --> SpendRule (As per the value of NAME column in DIGX_RL_SPEND table)
 - d. SPEND_DEFAULT_CATEGORY_ID → This property is used for maintaining default category, if no keyword is match from all maintained rules.

Below attached screenshot entry is required for setting default category. We need to update the entry from day one configuration screen. We have to maintain the Category ID in this configuration value.

Note: If below entry is not maintain and no rule is matched, then no category is set against the spend transaction.

Auto Categorization Of Spend Transactions

futura bank

What would you like to do today?

OBCLM token expiry time in seconds	60	Months for SCF Limit Expiry	2
Host Server IP for Oracle Financial Lending and Leasing	10.184.132.101	OBTF Port	
Document upload maximum allowed size in bytes.	5242880	OBCLM Application Id - Airmet facility	FCLTYP
OBCL Source Code	EXTSYS	OBVAM User Id	OBDXUSER
SCF Finance App Id	SCFFIN	OBSCF Maintenances Application Id	OBSCFCMMMAINT
Oracle Live Experience Cloud User ID	oraclefsgbuobdx	Maximum Days To Setup Cash Flow	180
OBSCF Port	<PORT>	IBM Host application name	
Receivables/Payables Management User Id	SWE TA	OBTF Entity Id	47AFFTF1
Invoice Image Upload Use Case Name	corp/iv/OBDX	ASP token expiry time in seconds	60
Default Spend Transaction Category	25		

Edit Cancel


[Home](#)

3. Categorization Of Spend Transactions Using ML Engine

ML Engine will do the auto categorization on user spend expenditure. It will auto map the category base on transaction description. If in case category does not exist in the system, then first it will create it and then map it to the transaction.

To activate the ML engine call, we have to set “**Configuration of ML call for Spend transaction categorization**” flag as **Y**. If in case, we don't set this value then by default ML engine service is in inactive state.

We can be able to update the flag with the help of “**System configuration**” screen with Admin Type Role.

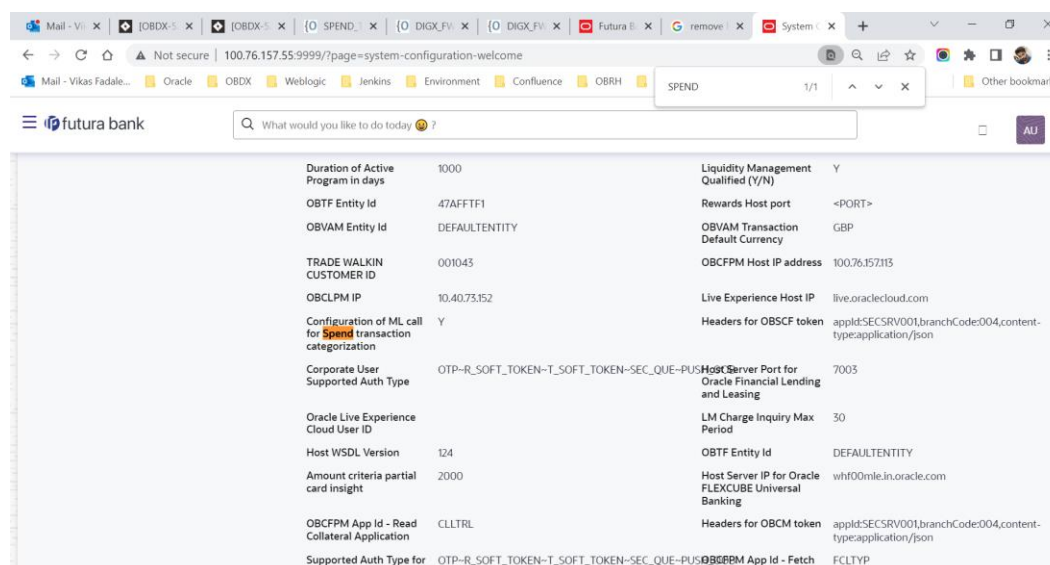

Below entry are required to activate ML engine interface call.

```
Insert into DIGX_FW_CONFIG_ALL_O
(PROP_ID,PREFERENCE_NAME,PROP_VALUE,DETERMINANT_VALUE,CREATED_BY,CREATION_DATE,
LAST_UPDATED_BY, LAST_UPDATED_DATE) values
('<<ENTITY_ID>>.com.ofss.digx.extxface.spendanalysis.adapter.transaction.ISpendUncategorizedTransactionAdapter.getSpendTransactionCategory','ExtxfaceAdapterPreference',
'com.ofss.digx.extxface.spendanalysis.impl.SpendDDATransactionAdapter','01','ofssuser',to_timestamp(sysdate,'DD-MON-RR HH.MI.SSXFF AM'),'ofssuser',to_timestamp(sysdate,'DD-MON-RR HH.MI.SSXFF AM'));
```

```
Insert into DIGX_FW_CONFIG_ALL_O
(PROP_ID,PREFERENCE_NAME,PROP_VALUE,DETERMINANT_VALUE,CREATED_BY,CREATION_DATE,
LAST_UPDATED_BY, LAST_UPDATED_DATE) values
('SPEND_DDA_TRANSACTION_CATEGORIZATION','ExtXfaceConfig','com.ofss.digx.extxface.impl.endpoint.OBRHEndPoint', '<<ENTITY_ID>>',
'ofssuser',to_timestamp(sysdate,'DD-MON-RR HH.MI.SSXFF AM'),'ofssuser',to_timestamp(sysdate,'DD-MON-RR HH.MI.SSXFF AM'));
```