

Routing Hub Configuration User Guide

**Oracle Banking Electronic Data Exchange
for Corporates**

Patchset Release 14.7.2.0.0

Part Number F89453-01

November 2023

Routing Hub Configuration User Guide

Oracle Financial Services Software Limited
Oracle Park
Off Western Express Highway
Goregaon (East)
Mumbai, Maharashtra 400 063
India

Worldwide Inquiries:

Phone: +91 22 6718 3000

Fax: +91 22 6718 3001

<https://www.oracle.com/industries/financial-services/index.html>

Copyright © 2018, 2023, Oracle and/or its affiliates. All rights reserved.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are “commercial computer software” pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate failsafe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited. The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

This software or hardware and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

Contents

1	Preface	1
1.1	Purpose	1
1.2	Intended Audience.....	1
1.3	Document Accessibility	1
1.4	Access to Oracle Support	1
1.5	Acronyms and Abbreviations	1
1.6	Structure	2
2	Introduction	3
2.1	Definitions.....	4
3	Start Maintenance - Login Screen.....	5
4	Main Menu Screen.....	6
5	Service Consumer	7
5.1	Add	8
5.1.1	Audit Type	10
5.1.2	Environment Variables.....	10
5.2	Import	14
5.3	View	17
5.4	Edit	17
5.5	Delete.....	17
5.6	JSON Export.....	19
5.7	SQL Export.....	19
6	Service Providers.....	20
6.1	Add	22
6.1.1	Headers	24
6.1.2	Service.....	25
6.2	Import	28
6.3	View	30
6.4	Edit	31
6.5	Delete.....	31
6.6	Export.....	32
6.7	Configuration	32

7	Implementation	35
7.1	Add	37
7.1.1	Authentication	41
7.1.2	Headers	43
7.1.3	Service	45
7.1.4	Queue.....	49
7.2	Import	51
7.3	View	52
7.4	Edit	53
7.5	Delete.....	54
7.6	Export.....	54
7.7	Configuration	54
8	Consumer Services.....	56
8.1	Add	57
8.1.1	Attributes	60
8.2	Import	62
8.3	View	63
8.4	Edit	64
8.5	Delete.....	64
8.6	Export.....	65
9	Transformation	66
9.1	Add	68
9.2	Import	72
9.3	View	74
9.4	Edit	75
9.5	Delete.....	76
9.6	Export.....	76
10	Routing.....	77
10.1	Add	78
10.1.1	Add Routing with Custom Rule	79
10.1.2	Add Custom Rule using Expression Editor	80
10.1.3	Transformations.....	81
10.2	View	84

10.3	Edit	84
10.4	Delete.....	85
11	Chaining	86
12	Extensibility	88
12.1	XML merging attributes	88
12.1.1	Identity Matcher	88
12.1.2	Skip Matcher	89
12.1.3	Override Action	90
12.1.4	Complete Action	91
12.1.5	Replace Action	92
12.1.6	Preserve Action	93
12.1.7	Delete Action.....	93
13	Audit purging / archiving	94
14	Multipart request.....	95
15	Configuration	96
16	Audit Log	100
17	Monitoring Dashboard.....	102
18	Transformation Type.....	107
18.1	Velocity	107
18.2	XSLT	110
18.3	JSLT	110
19	Oracle Banking Routing Hub Integration Specification.....	111
19.1	Token Generation	111
19.2	Synchronous Dispatch API Specification	112
19.3	Asynchronous Dispatch API Specification.....	114
19.4	Asynchronous Dispatch Response API Specification	116
19.5	Template evaluation API Specification	118
20	Oracle Banking Routing Hub VM Arguments.....	120
21	Functional Activity Codes.....	125

1 Preface

1.1 Purpose

This document enables the user to integrate Oracle Products with External Product Processor through Oracle Banking Routing Hub Platform.

1.2 Intended Audience

This document is intended for the following audience:

- Customers
- Partners

1.3 Document Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

1.4 Access to Oracle Support

Oracle customers have access to electronic support through My Oracle Support. For information, visit

<http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit

<http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

1.5 Acronyms and Abbreviations

Abbreviation	Description
OIC	Oracle Integration Cloud
OBRH	Oracle Banking Routing Hub
UAT	User Acceptance Testing

1.6 Structure

This manual is organized into the following categories:

Preface gives information on the intended audience. It also describes the overall structure of the User Manual.

The subsequent chapters describe following details:

- Introduction
- Preferences & Database
- Configuration / Installation

2 Introduction


'Oracle Banking Routing Hub' enables seamless & standardized integrations between FSGBU Banking Products using configurations. This component is available as part of the product Infrastructure solution. A loose couple integration between banking products is possible with Oracle Banking Routing Hub.

Consumer Application (An application/product that needs to integrate with another product to retrieve information or post transactions) need not know following details while coding the integration.

- Servicing Providers or Product Processors - Products which provides data to the Consumer Application when required or posts the transaction when initiated from a consumer application.
- Name of the Service - Logical name of the service e.g. Funds Transfer, Letter of Credit Initiation to fetch the details from Service Provider product or post a transaction.
- Messaging structure of Service - Structure of the message e.g JSON, XML, multipart request.
- Communication Protocol – Web services, Rest API, Queue, OIC.

Integration can be achieved and modified anytime later through 'Oracle Banking Routing Hub' configurations. A consumer can also be integrated with different versions of a single Product processors if required.

In this document we have shown the maintenance of two product i.e., "Oracle Service Consumer" as Service Consumer and "External Product Processor" as Service Provider

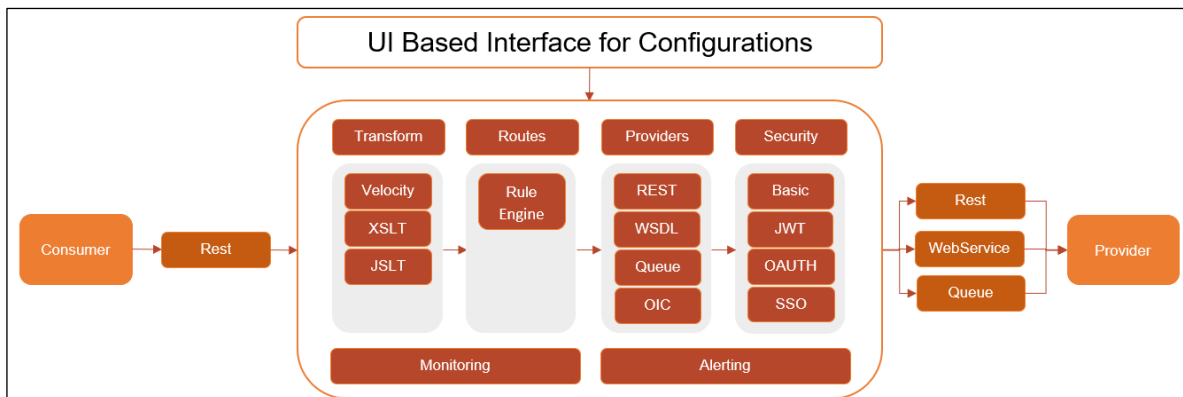


2.1 Definitions

Following are some of the acronyms and abbreviations you are likely to find in this user manual:

Definitions	Description
Service Consumers	Applications that need to integrate with multiple product processors to fetch the information or post a transaction. Service Consumer integrates with Oracle Banking Routing Hub
Service Providers	The product processors available to serve the request send by Oracle Banking Routing Hub on behalf of Service Consumer
Service	Soap or Rest Web Services. Soap Services can be imported through WSDL while Rest Services can be imported through Swagger
Headers	headers require by product processor while sending request


3 Start Maintenance - Login Screen

Open Browser, Hit URL and Launch **Oracle Banking Routing Hub**.

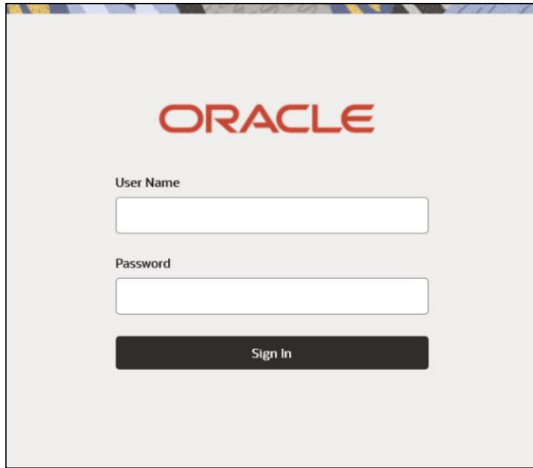

Component briefing				
Component Name	Component Type	Is Mandatory	Data type	Comments
User Name	Text Box	Yes	Alphanumeric	
Password	Text Box	Yes	Alphanumeric with special characters	
Sign In	Button			Navigates to Dashboard / menu screen
Cancel	Button			

4 Main Menu Screen

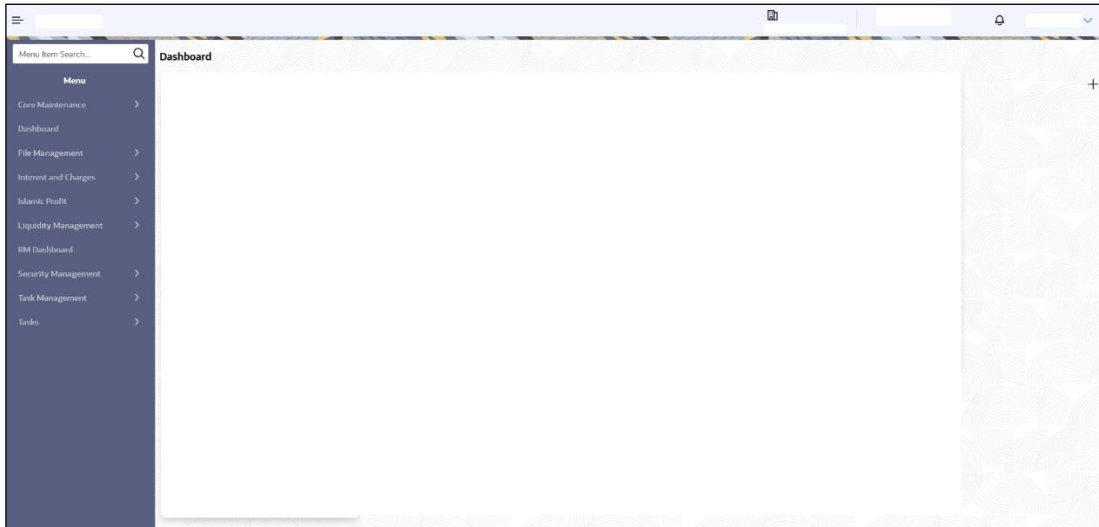


Component briefing		
Component Name	Component Type	Comments
Core Maintenance	Main menu item	
Routing Hub	Sub menu item	
Monitoring Dashboard	Sub menu option	Navigates to Monitoring Dashboard
Configuration	Sub menu option	Navigates to Configuration screen
Service Consumer	Sub menu option	Navigates to Service Consumer screen
Request Audit	Sub menu option	Navigates to Request Audit screen

5 Service Consumer

This option enables set up of Service Consumer. Service Consumer is an Oracle banking product which invokes Oracle Banking Routing Hub API for integration. Oracle Banking Routing Hub analyses, evaluate destination product processor and transform data into format as required by the destination product processor for service a request type.

Service Consumer comprises of the source and destination integration details.

Navigation: **Core Maintenance -> Routing Hub -> Service Consumers**

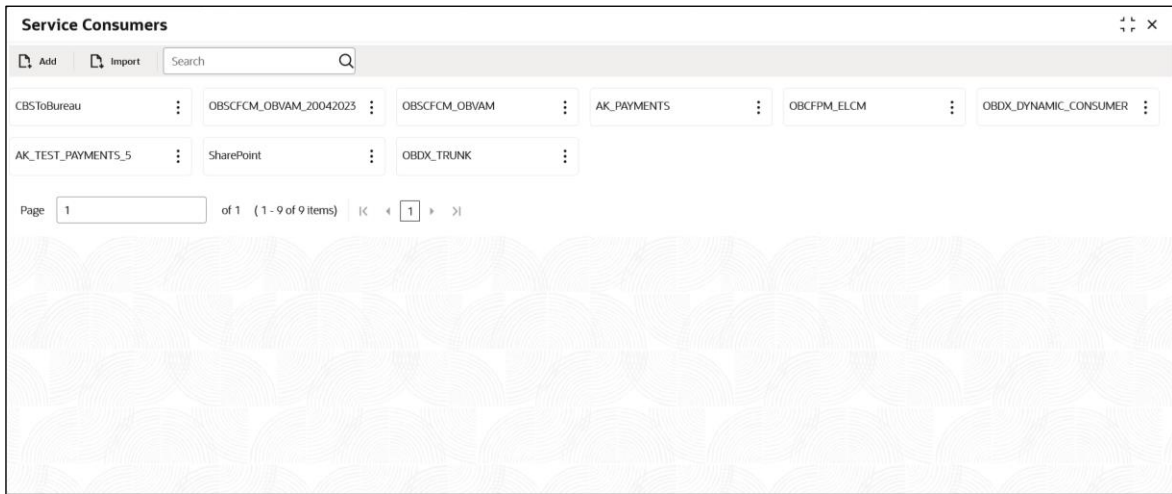

You can Import the settings shipped out of the box by a Oracle Banking product or from another environment say UAT or pre-production environment.


Component briefing			
Component Name	Component Type	Condition	Comments
Add	Button		Pops up add dialog
Import	Button		Pops up import dialog

Search	Combo Box One		Provides search functionality with case insensitive (Service Consumer Name) Note: Use wildcard character (*) for pattern matching
Navigation: Service Consumers -> 3 dot icon (operation menu)			
View	menu option	Non-editable	Pops up view dialog
Edit	menu option		Pops up edit dialog
Delete	menu option		
Export	Sub menu item		
JSON	menu option		Exports in JSON
SQL	menu option		Exports in SQL
Configuration	menu option		Pops up configuration dialog
Request Audit	menu option		Pops up request audit log

5.1 Add

In addition to importing Service Consumers, users can create Service Consumers manually using Add option.

Navigation: **Service Consumers -> Add**

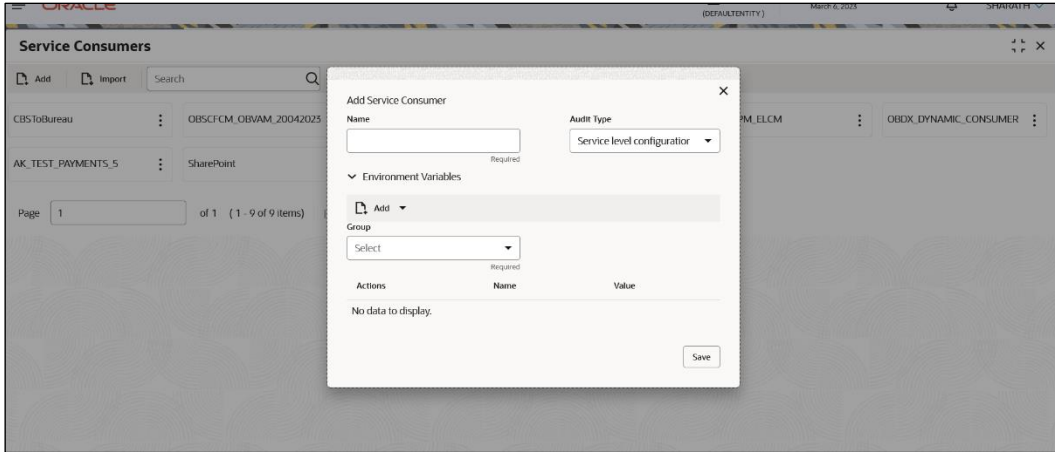

Component briefing					
Component Name	Component Type	Is Mandatory	Data type	Validation	Comments
Name	Text Box	Yes	Alphanumeric with special characters	<ul style="list-style-type: none"> Name cannot be blank Enter 0 or more characters, up to a maximum of 255 No numeric value at beginning and no space allowed 	Unique Service Consumer name
Audit Type	Combo Box One	Yes			Predefined Values: All Requests / Service level configuration / None Please refer Audit Type section
Environment Variables	Table Content				

Save	Button				Saves the Service Consumer
-------------	--------	--	--	--	----------------------------

5.1.1 Audit Type

The application provides multiple options to audit a requires in OBRH. Following options are available via configurations:

- **All Requests** – All requests are logged in the OBRH and can be viewed later for debugging.
- **Specific Request:** Option has been provided at consumer services for enabling audit of requests for specific Consumer Services. Audit type should be configured as “Service level configuration” and audit option at “Consumer Services” should be selected for Consumer Services which need to be audited. Monitoring dashboard does not provide the data for requests which are not being audited.
- **None** - Disables the audit completely. Audit logs cannot be reviewed later and monitoring dashboard does not provide the data.



5.1.2 Environment Variables

User will be able to define the group of variables which can be accessed throughout the specific consumer’s configuration

Below is the syntax for accessing environment variables:

`$env.Environment_Group_Name.Environment_Variable_Name`

eg: `$env.COMMON.BRANCH_CODE`

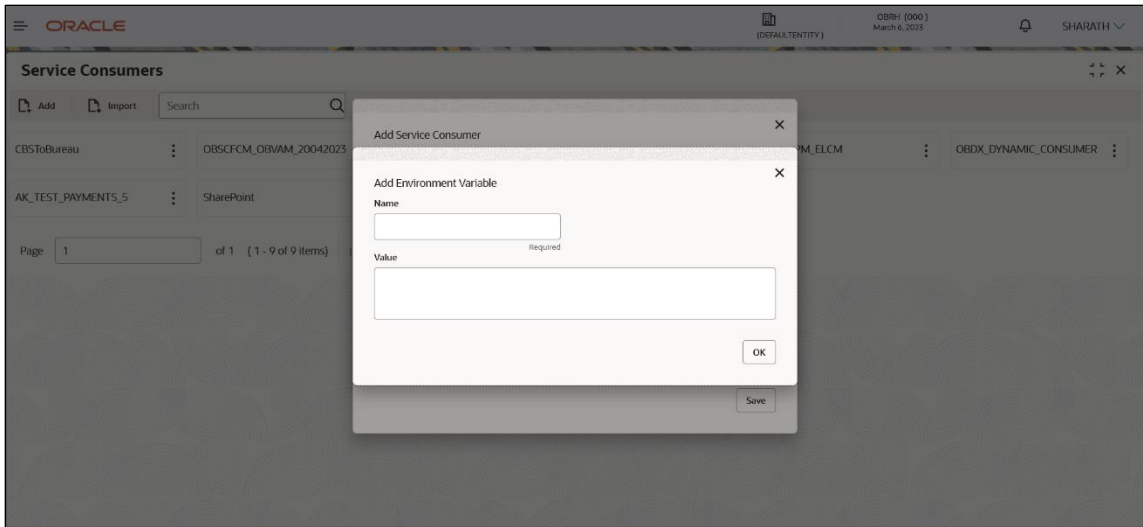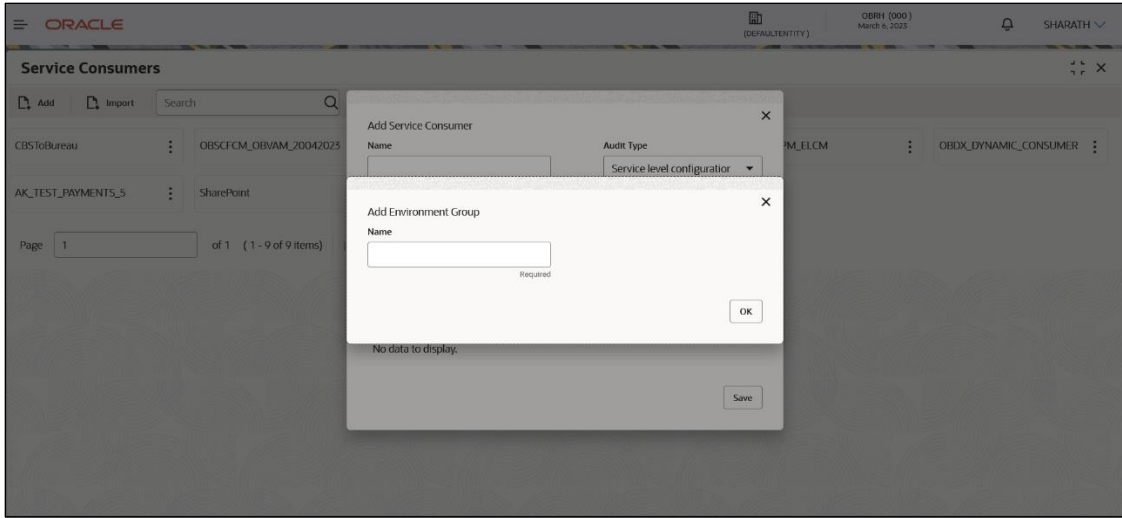

Component briefing					
Component Name	Component Type	Is Mandatory	Data type	Validation	Comments
Add	Menu Item				
Group	Menu option				Pops up add group dialog
Variable	Menu option				Pops up add variable dialog

Navigation: Service Consumer -> Environment Variables -> 3 dot icon (operation menu)					
Edit	menu option / icon				Pops up edit dialog
Delete	menu option / icon				Deletes group / variable

Environment Group / Variable					
Name	Text Box	Yes	Alphanumeric with special characters	<ul style="list-style-type: none"> Name cannot be blank Enter 0 or more characters, up to a maximum of 255 No numeric value at beginning and no space allowed 	
Value	Text Area				Value can either be hardcoded or Velocity mapping.
OK	Button				Saves the group / variable and displays it in the list

5.2 Import

User can create a service consumer by importing the JSON file and manually selecting the service Providers or select all providers that needs to be imported.

User can also import zip file in order to import all the configuration JSON files together.

Navigation: **Service Consumers -> Import**

Import Service Consumer [X]

File

Name

Required

Overwrite extended templates **Overwrite environment variables**

Yes No Yes No

✓ **Service Providers**

Name	
No data to display.	

Component briefing						
Component Name	Component Type	Is Mandatory	Data type	Validation	Condition	Comments
File	File picker	Yes		Allows only to select one file	Accepts JSON and ZIP file	Pops up file selection dialog box
Extract	Button	Yes				Extracts Consumer Name and Service Provider list from JSON file only and displays it in the respective elements.


Name	Text Box	Yes	Alphanumeric with special characters	<ul style="list-style-type: none"> Name cannot be blank Enter 0 or more characters, up to a maximum of 255 No numeric value at beginning and no space allowed 	Editable	Name is required only for JSON file
Overwrite extended templates	Radio Button	Yes				<p>Predefined Values: Yes / No</p> <p>Yes: This option is for overwriting the extended templates in configuration and No: This option is for retaining the existing extended templates in configuration.</p>
Overwrite environment						<p>Predefined Values: Yes/No</p> <p>The available options are:</p> <p>Yes - This option overwrites the environment variables.</p> <p>No - This option retains the existing environment variables.</p>
Service Provider	Collapsible Header & Content					Displays the list of service providers that are present in JSON file only
Import	Button					Imports Service Consumer

NOTE: Below data needs to be changed after importing consumer configuration file:

- Implementation Host and Port
- Implementation Authentication Password

5.3 View


User can view consumer details and can also switch to edit form by clicking on edit icon and also user can view import or export the environment variables
 Navigation: **Service Consumers -> Operation Menu (3 dot icon) -> View**

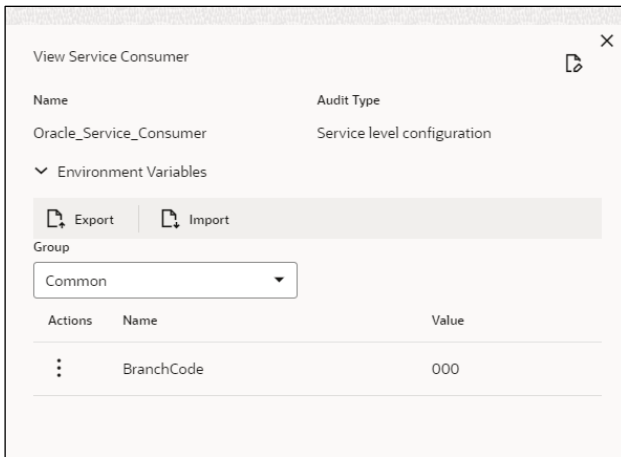

5.4 Edit

User can modify the consumer details.


Navigation: **Service Consumers -> Operation Menu (3 dot icon) -> Edit**

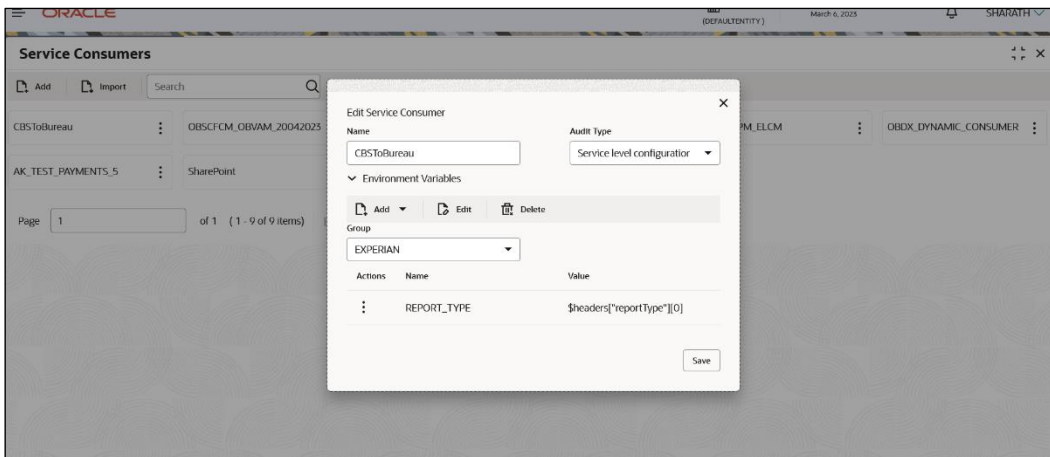

5.5 Delete

User can delete the consumer.


Navigation: **Service Consumers -> Operation Menu (3 dot icon) -> Delete**

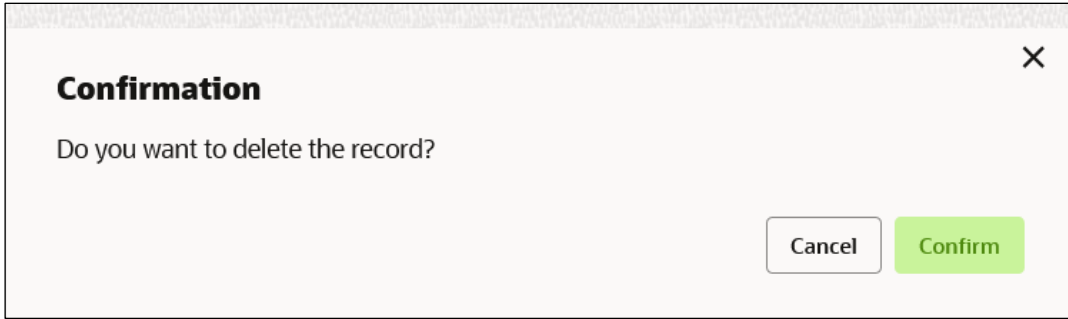

5.6 JSON Export

User can export the consumer configuration as JSON file. The option for Export is provided to move the configurations from one environment to another.

Navigation: **Service Consumers -> Operation Menu (3 dot icon) -> Export -> JSON**

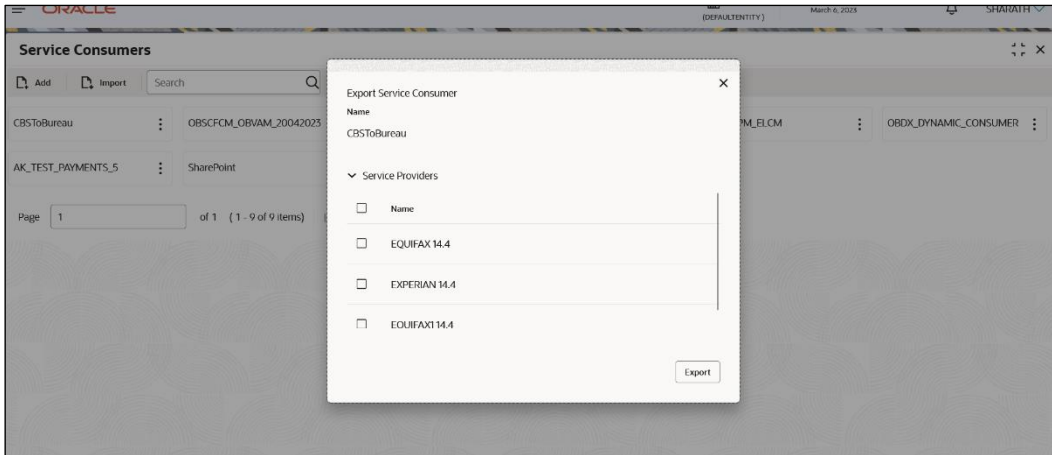


Note:

- User has an option to select service providers from the list which needs to be exported or can click on “Select All” option for all service providers.
- JSON Export feature will export below data:
 - Selected service consumer
 - All consumer services
 - Selected service providers with services
 - All implementations of selected service providers with services (without Host, Port and Authentication Password)
 - All transformations
 - All routes

5.7 SQL Export

User can export the consumer configuration as SQL file.

Navigation: **Service Consumers -> Operation Menu (3 dot icon) -> Export -> SQL**

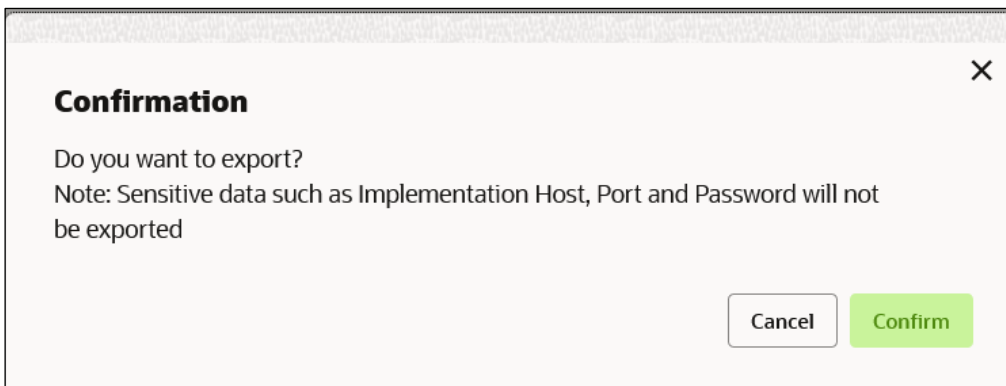


NOTE: SQL Export feature will export entire configuration without Host, Port and Authentication Password details.

6 Service Providers

Service Providers are the product processors configured to process the request send by Oracle Banking Routing Hub on behalf of service consumers.

Service Provider comprises of destination integration details.

Navigation: **Core Maintenance -> Routing Hub -> Service Consumers -> <Specific Service Consumer> -> Service Providers**

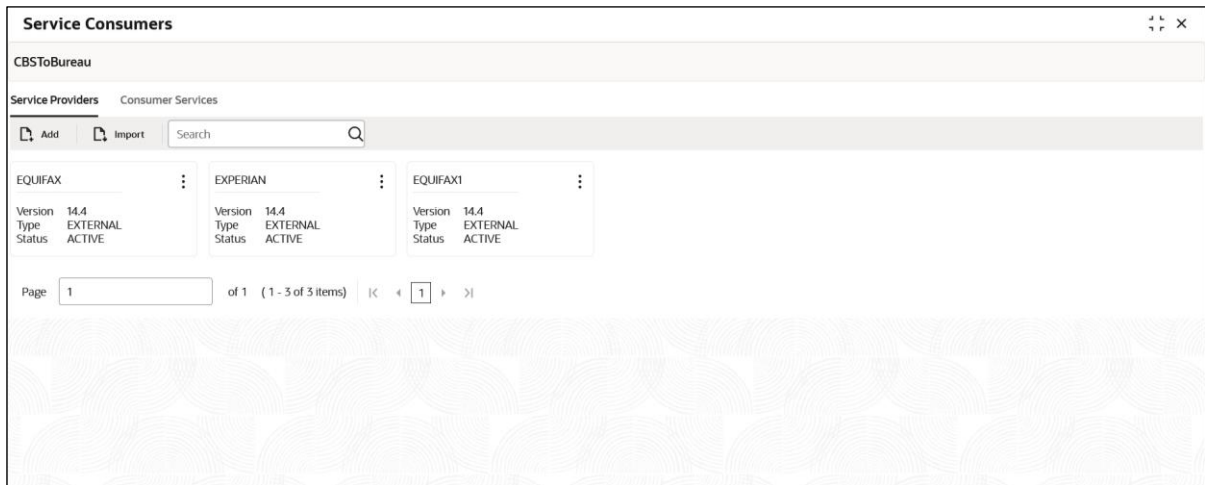


Component briefing			
Component Name	Component Type	Condition	Comments
<Service Consumer>	Button		Navigates back to Service Consumers
Add	Button		Pops up add dialog
Import	Button		Pops up import dialog
Search	Combo Box One		Provides search functionality with case insensitive (Service Provider Name) Note: Use wildcard character (*) for pattern matching

Navigation: Service Providers -> 3 dot icon (operation menu)			
View	menu option	Non-editable	Pops up view dialog
Edit	menu option		Pops up edit dialog
Delete	menu option		
Export	menu option		Exports in JSON
Configuration	menu option		Pops up configuration dialog
Request Audit	menu option		Pops up request audit log
Clear Cache	menu option		Clears SOAP client cache

6.1 Add

User can create Service Provider manually.

Navigation: **Service Providers-> Add**

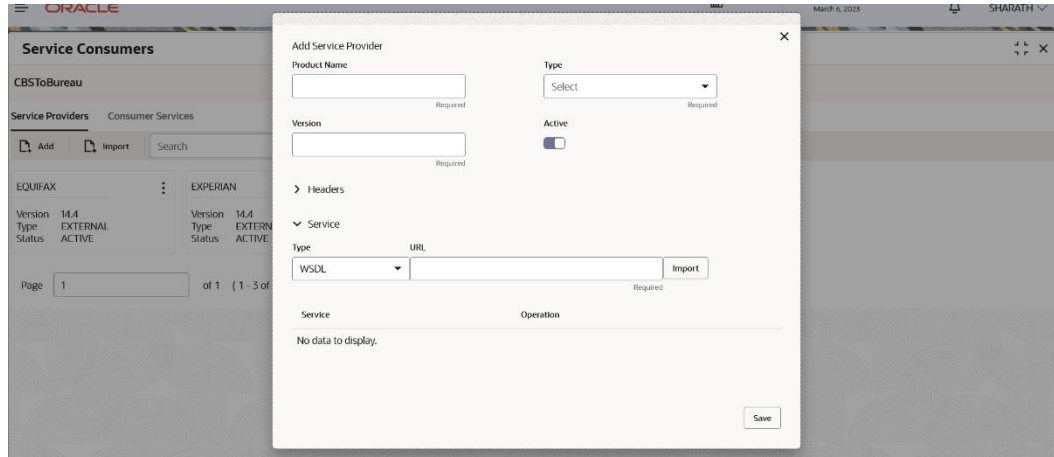

Component briefing					
Component Name	Component Type	Is Mandatory	Data type	Validation	Comments
Product Name	Text Box	Yes	Alphanumeric with special characters	<ul style="list-style-type: none"> Name cannot be blank Enter 0 or more characters, up to a maximum of 255. No numeric value at beginning and no space allowed. 	Unique provider name
Type	Combo Box One	Yes			Predefined Values: INTERNAL / EXTERNAL INTERNAL type should be used for oracle products.


					EXTERNAL type should be used for non-oracle products
Version	Text Box	Yes	Number	<ul style="list-style-type: none"> Version cannot be blank Enter 0 or more characters, up to a maximum of 255. Enter only numeric or decimal values. 	Unique provider version
Active	Switch				<p>Predefined Values: ACTIVE / INACTIVE</p> <p>If provider is marked as inactive, then all related routes will be stopped.</p>
Headers	Collapsible Header & Content				Provider specific headers
Service	Collapsible Header & Content				Provider specific service details
Save	Button				Saves the Service Provider

6.1.1 Headers

A product processor might require some standard headers to be passed along with the request. User can specify the headers which are required by service endpoints for its all implementations but not present in swagger file.

NOTE: Content-type header will be removed from Provider request if header value is NONE.


These headers can be configured in Oracle Banking Routing Hub using the steps given below

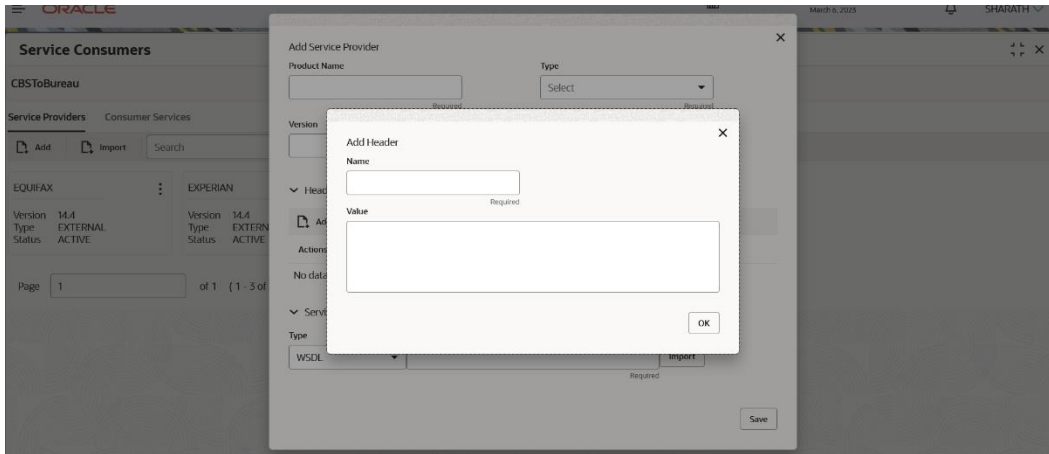

Component briefing					
Component Name	Component Type	Is Mandatory	Data type	Validation	Comments
Add	Button				Pops up add dialog
Navigation: Service Providers -> Headers -> 3 dot icon (operation menu)					
Edit	menu option				Pops up edit dialog
Delete	menu option				Deletes header
Navigation: Service Providers -> Headers -> Add					

Name	Text Box	Yes	Alphanumeric with special characters	<ul style="list-style-type: none"> Name cannot be blank Enter 0 or more characters, up to a maximum of 255. No numeric value at beginning and no space allowed. 	
Value	Text Area	Yes	Alphanumeric with special characters	<ul style="list-style-type: none"> Enter 0 or more characters, up to a maximum of 255. 	Value can either be hardcoded or can be Velocity mapping.
OK	Button				Saves the header details and displays it in the list

6.1.2 Service

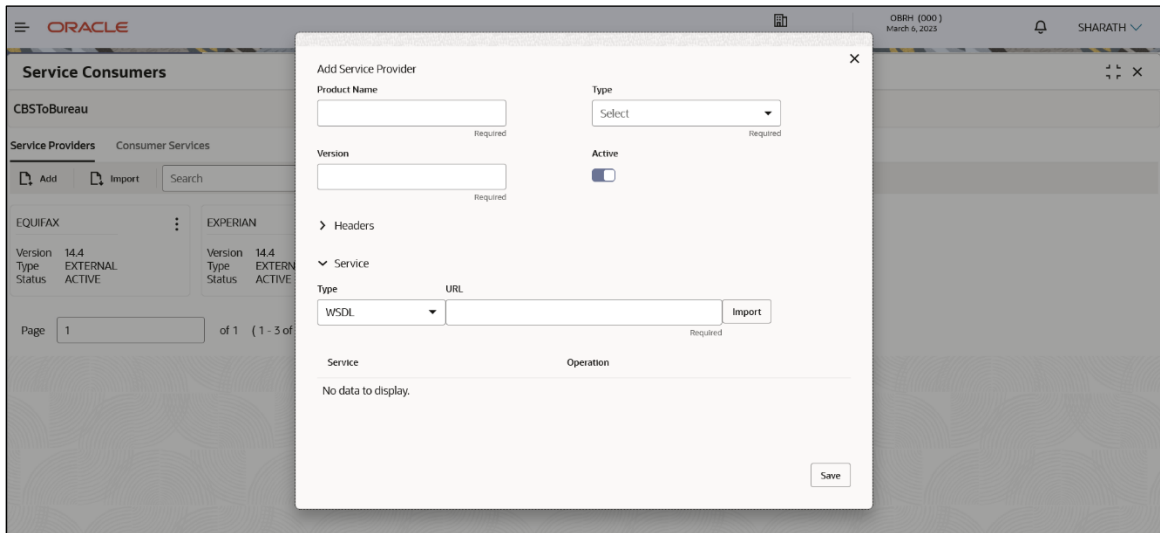

Component briefing			
Component Name	Component Type	Is Mandatory	Comments
Type	Combo Box One	Yes	Predefined Values: WSDL / SWAGGER / OTHERS
URL	Text Box	Yes	Service URL of the file location
Context Path	Text Box		Context path of below formatted URL http://host:port/context-path/endpoint
Import	Button		Extracts the service information from URL and displays it in the Service list

6.1.2.1 WSDL

The Web Services Description Language (WSDL) is an XML-based interface description language that is used for describing the functionality offered by a web service.

Both SSL and non-SSL WSDL URL are supported.

NOTE: In case there is a change in wsdl file, then same wsdl file need to be imported again in order to update the provided service information in routing hub.

6.1.2.2 SWAGGER

Swagger is an Interface Description Language for describing RESTful APIs expressed using JSON.

Currently, Swagger 2.0 & OpenAPI 3.0 both are supported.

NOTE: In case there is a change in swagger file, then same swagger file need to be imported again in order to update the provided service information in routing hub.

6.1.2.3 OTHERS

“OTHERS” option is for adding REST API details manually when provider does not have swagger file.

Component briefing				
Component Name	Component Type	Is Mandatory	Validation	Comments
Name	Text Box	Yes	<ul style="list-style-type: none"> Name cannot be blank No space allowed at beginning. 	Name of operation

Http Method	Combo Box One	Yes		Predefined Values: GET / POST / PUT / PATCH / DELETE
Endpoint	Text Box	Yes	<ul style="list-style-type: none"> Endpoint cannot be blank No space allowed at beginning. 	Endpoint URL of operation
Context Path	Text Box			Context path of below formatted URL http://host:port/context-path/endpoint
Service Headers	Collapsible Header & Content			Endpoint specific headers Value can either be hardcoded or can be Velocity mapping.
Service Query Params	Collapsible Header & Content			Endpoint specific query parameters Value can either be hardcoded or can be Velocity mapping.
Add	Button			Adds the endpoint details in the Service list


NOTE: In case there is a change in existing endpoint, then same endpoint details need to be entered again with the new changes in order to update the existing provided service information in routing hub.

6.2 Import

User can create a service provider by importing the JSON file.

User can also import zip file in order to import all the configuration JSON files together (except parent level configuration JSON files).

Navigation: **Service Providers -> Import**

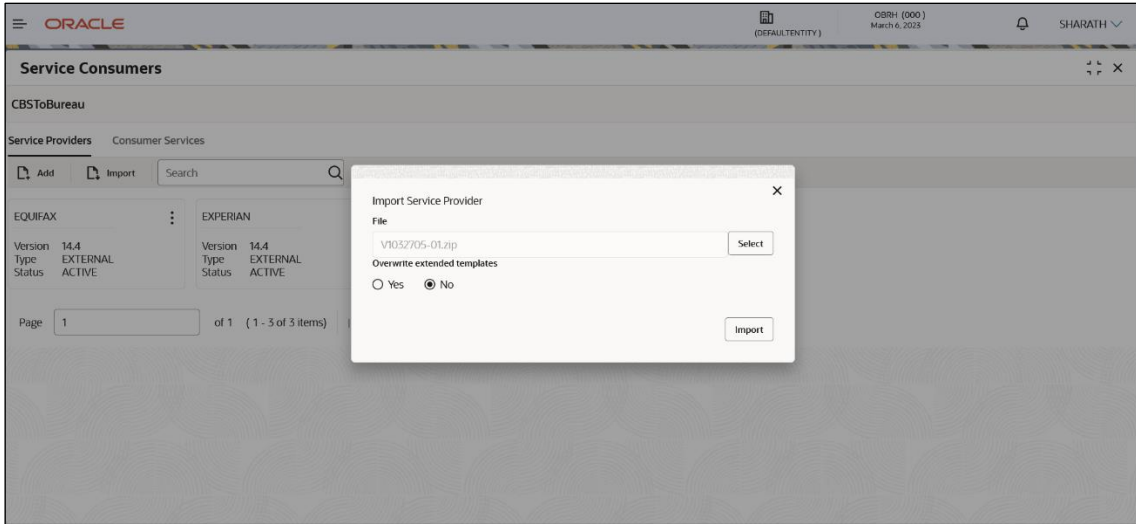

Component briefing					
Component Name	Component Type	Is Mandatory	Validation	Condition	Comments
File	File picker	Yes	Allows only to select one file	Accepts JSON and ZIP file	Pops up file selection dialog box
Overwrite extended templates	Radio Button	No			<p>Predefined Values: Yes / No</p> <p>Yes: This option is for overwriting the extended templates in configuration</p> <p>No: This option is for retaining the existing extended templates in configuration.</p> <p>Note: This option is only visible if ZIP file is selected</p>

Import	Button				Imports Service Provider
---------------	--------	--	--	--	--------------------------


NOTE: Below data needs to be changed after importing provider configuration file:

- Implementation Host and Port
- Implementation Authentication Password

6.3 View

User can view provider details and can also switch to edit form by clicking on edit icon.

Navigation: **Service Providers -> Operation Menu (3 dot icon) -> View**

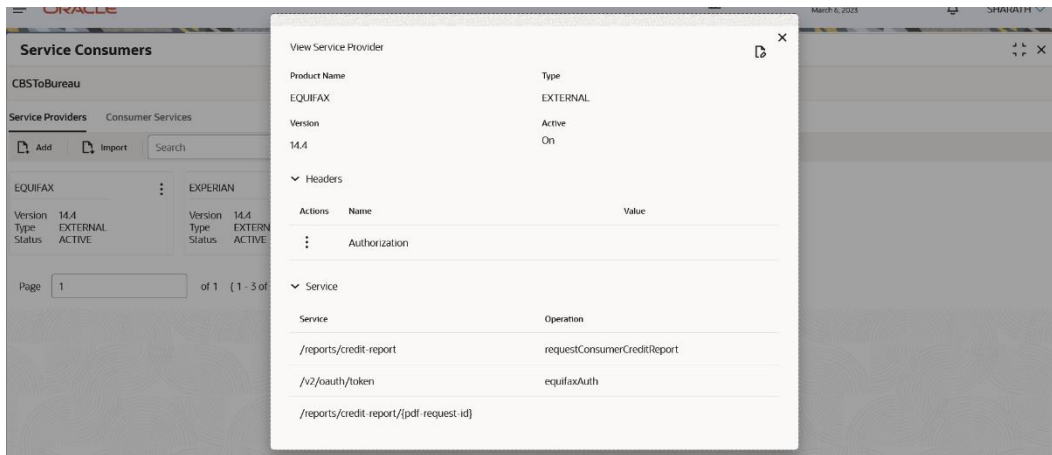

6.4 Edit

User can modify the provider details.

Navigation: **Service Providers -> Operation Menu (3 dot icon) -> Edit**

Edit Service Provider
✕

Product Name

Type

Version

Active

▼ Headers

+ Add

Actions	Name	Value
⋮	Authorization	

▼ Service

Type

URL


Required

Service	Operation
/reports/credit-report	requestConsumerCreditReport
/v2/oauth/token	equifaxAuth
/reports/credit-report/{pdf-request-id}	

6.5 Delete

User can delete the provider.


Navigation: **Service Providers -> Operation Menu (3 dot icon) -> Delete**

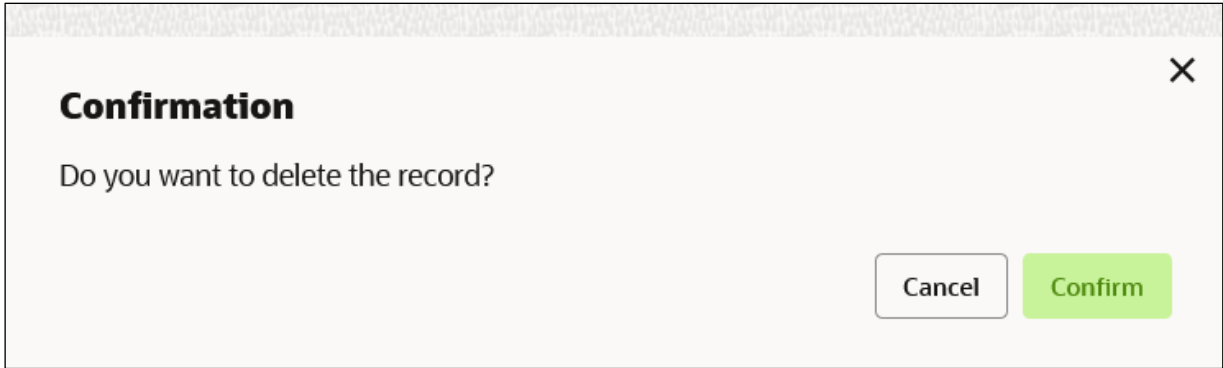

6.6 Export

User can export the provider configuration as JSON file.

Navigation: **Service Providers -> Operation Menu (3 dot icon) -> Export**

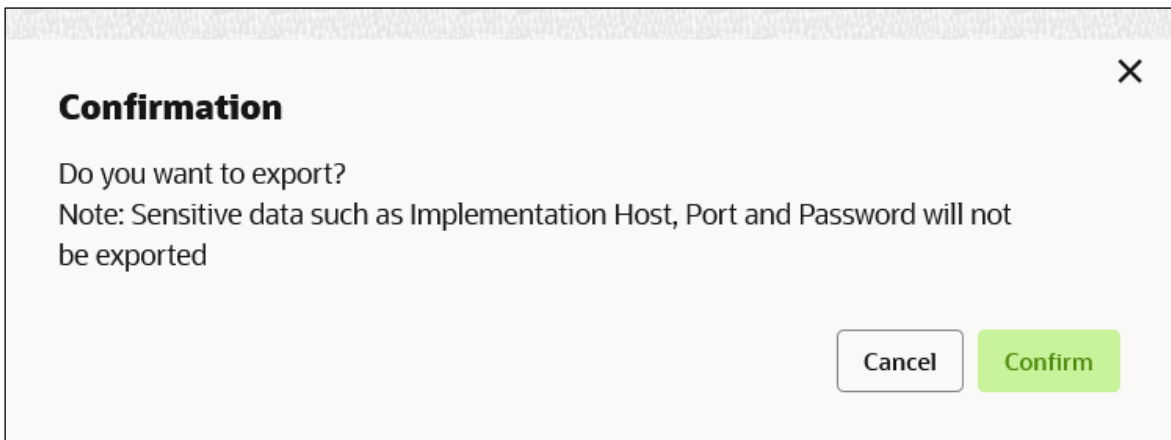

NOTE: Below data will not be exported:

- Implementation Host
- Implementation Port
- Implementation Authentication Password


The above data needs to be configured manually after importing the configuration file.

Same has been mentioned in Import section

6.7 Configuration

End-user can configure the properties for failing the routing hub requests.

Navigation: **Service Providers -> Operation Menu (3 dot icon) -> Configuration**

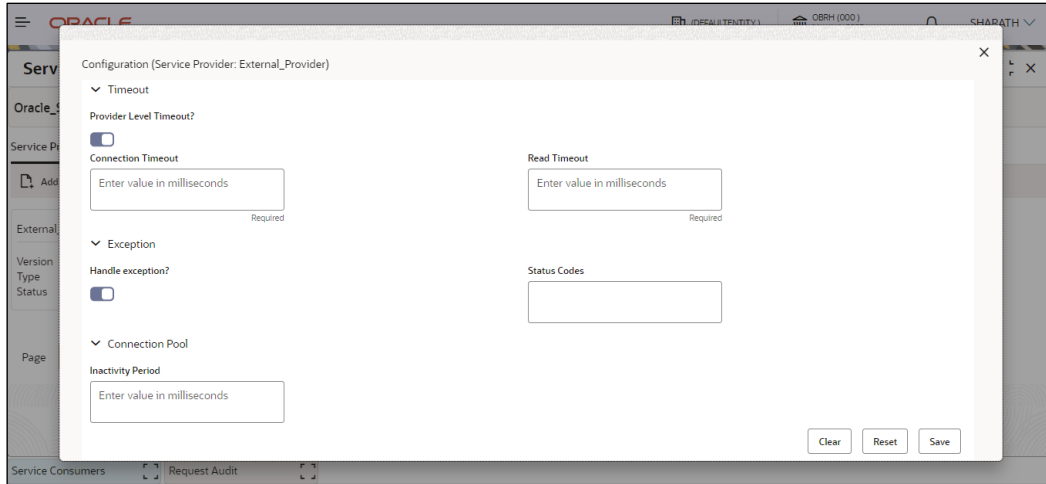

Component briefing				
Component Name	Component Type	Is Mandatory	Validation	Comments
Provider level timeout	Switch			This property is used to override the global timeout values. Default value is false.
Connection Timeout	Text Box	No	Value should be in milliseconds	This property is used to set the timeout in making the initial connection i.e. connection handshake.
Read Timeout	Text Box	No	Value should be in milliseconds	This property is used to set the timeout on waiting to read data.
Handle exception	Switch			This property is used to fail the routing hub request for failed provider requests. Default value is false.


Status Codes	Text Box	No	Only 4xx and 5xx status codes are allowed as comma-separated values.	This property is used to fail routing hub request for specific status codes of failed provider requests. If not specified, then routing hub request will fail for all 4xx and 5xx status codes of failed provider requests.
Inactivity Period	Text Box	No	Value should be in milliseconds	This property is used to specify connection inactivity time for re-validating connections in connection pool

7 Implementation

Implementation comprises of Eureka client instance, Queue, Host, Port, authentication and implementation specific service details. Oracle Banking Routing Hub supports webservice and Rest API.

NOTE: Default implementation is created whenever a new service provider is added.

Navigation: **Core Maintenance -> Routing Hub -> Service Consumers -> <Specific Service Consumer> -> Service Providers -> <Specific Service Provider> -> Implementation**

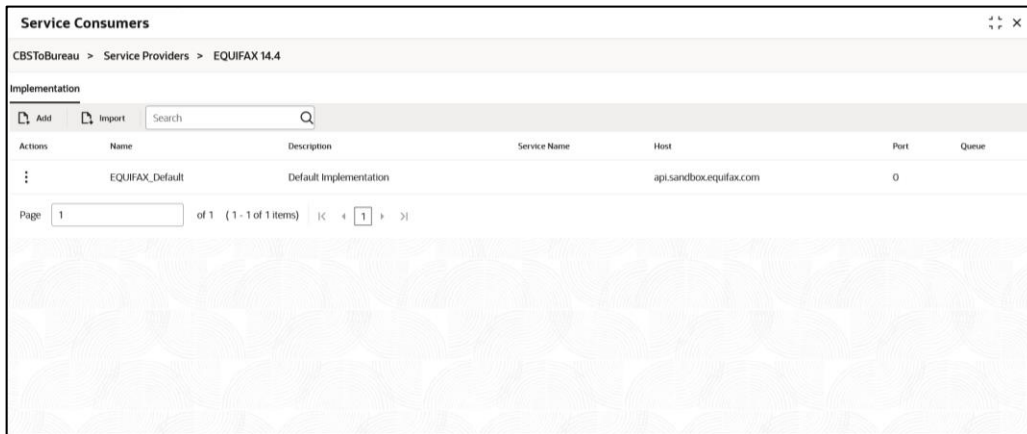

Component briefing			
Component Name	Component Type	Condition	Comments
<Service Consumer>	Button		Navigates back to Service Consumers
<Service Provider>	Button		Navigates back to Service Providers
Add	Button		Pops up add dialog
Import	Button		Pops up import dialog

Search	Combo Box One		Provides search functionality with case insensitive (Implementation Name) Note: Use wildcard character (*) for pattern matching
Navigation: Implementation -> 3 dot icon (operation menu)			
View	menu option	Non-editable	Pops up view dialog
Edit	menu option		Pops up edit dialog
Delete	menu option		
Export	menu option		Exports in JSON
Configuration	menu option		Pops up configuration dialog
Request Audit	menu option		Pops up request audit log
Clear Cache	Menu option		Clears SOAP client cache

7.1 Add

User can create Implementation manually.

Navigation: **Implementation-> Add**

Component briefing					
Component Name	Component Type	Is Mandatory	Data type	Validation	Comments
Name	Text Box	Yes	Alphanumeric with special characters	<ul style="list-style-type: none"> Name cannot be blank Enter 0 or more characters, up to a maximum of 255. No numeric value at beginning and no space allowed. 	Unique implementation name

Description	Text Area	Yes	Alphanumeric with special characters	<ul style="list-style-type: none"> • Description cannot be blank • Enter 0 or more characters, up to a maximum of 1000. • No space allowed at beginning or ending of the value. 	
Type	Combo Box One	Yes			<p>Predefined Values: DEFAULT / QUEUE / OIC</p> <p>Note: DEFAULT type is for REST and SOAP API calls.</p>
Default	Switch				Each type can have one default implementation.
Eureka Instance	Switch				<p>Eureka Instance option is available only for internal providers and default type.</p> <p>By default, Eureka Instance will be toggled ON for internal providers and OFF for external providers.</p> <p>Note: api-gateway will be removed (if present) from the</p>

					<p>provider request url if Eureka Instance is toggled ON.</p> <p>And api-gateway will be added (if missing) in the provider request url if Eureka Instance is toggled OFF & Authentication type is selected as JWT_TOKEN or OAUTH_TOKEN.</p>
Scheme	Combo Box One	Yes			<p>Scheme option is available only for default type.</p> <p>Predefined Values: HTTPS / HTTP</p>
Service Name	Text Box	Yes		<ul style="list-style-type: none"> • Service Name cannot be blank • Enter 0 or more characters, up to a maximum of 255. <p>No space allowed.</p>	<p>If Eureka Instance is toggled ON and type is default, then only service name is required.</p>
Host	Text Box	Yes	Alphanumeric with special characters	<ul style="list-style-type: none"> • Host cannot be blank • Enter 0 or more characters, up to a maximum of 255. <p>No space allowed.</p>	<p>If Eureka Instance is toggled OFF and type is default, then only host and port is required.</p>

Port	Text Box	No	Number	<ul style="list-style-type: none"> • Enter 0 or more characters, up to a maximum of 6. • Only numeric value allowed. 	If Eureka Instance is toggled off and type is default, then only host and port is required.
Authentication	Collapsible Header & Content				Authentication option is available only when Eureka Instance is toggled OFF and type is default.
Headers	Collapsible Header & Content				Header option is available only when type is default or OIC.
Service	Collapsible Header & Content				Service option is available only when type is default or OIC.
Queue	Content				Queue content is available only when type is queue.
Save	Button				Saves the Implementation

7.1.1 Authentication

If External Product processor require authentication to connect to it, Oracle Banking Routing Hub provides standard authentication mechanism schemes like BASIC, JWT, OAUTH_TOKEN, SSO.

NOTE: In case of no authentication, NONE needs to be set as Authentication Type.
 In case of identity propagation, SSO needs to be set as Authentication Type.
 In case of JWT, and OAUTH_TOKEN token will be cached by default.

Process of configuration of these is described below.

Edit Implementation
✕

Name

Description

Type

Default

Scheme

Host

Port

▼ Authentication

Type

▼ Headers

+ Add

Actions	Name	Value
No data to display.		

▼ Service

Type

URL

Import

Required

Service	Operation
No data to display.	

Component briefing					
Component Name	Component Type	Is Mandatory	Data type	Validation	Comments
Type	Combo Box One	Yes			Predefined Values: NONE / BASIC / JWT_TOKEN / OAUTH_TOKEN / SSO
Encryption	Switch				This option is used to encrypt user credentials and is only available for JWT_TOKEN and OAUTH_TOKEN authentication types. Note: This field depends on the value of api-gateway's property "EncryptionFlag" at provider end. For more information on property value, please refer to the Oracle Banking Microservices Architecture Deployments section in Oracle Banking Microservices Platform Foundation Installation Guide .
Username	Text Box		Alphanumeric with special characters	<ul style="list-style-type: none"> Username cannot be blank 	Username is mandatory if authentication type is BASIC /

				<ul style="list-style-type: none"> • Enter 0 or more characters, up to a maximum of 255. • No numeric value at beginning and no space allowed. 	JWT_TOKEN / OAUTH_TOKEN
Password	Text Box		Alphanumeric with special characters	Password cannot be blank	Password is mandatory if authentication type is BASIC / JWT_TOKEN / OAUTH_TOKEN


7.1.2 Headers

External product processor might require some standard headers to be passed along with the request.

User can specify the headers which are required by service endpoints for specific implementation but not present in swagger file.

NOTE: Content-type header will be removed from Provider request if header value is NONE.


These headers can be configured in Oracle Banking Routing Hub using the steps given below

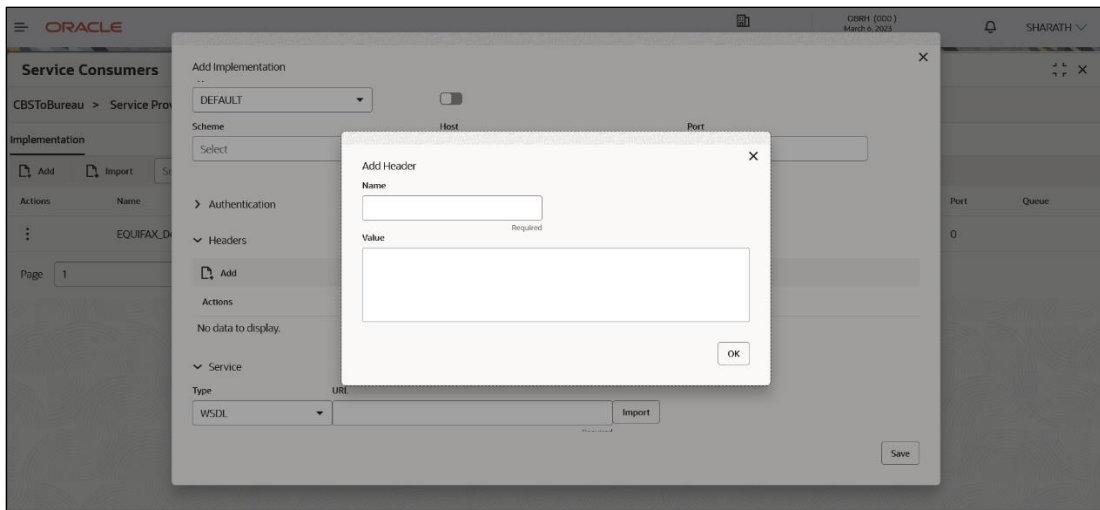

Component briefing					
Component Name	Component Type	Is Mandatory	Data type	Validation	Comments
Add	Button				Pops up add dialog
Navigation: Implementation -> Headers -> 3 dot icon (operation menu)					
Edit	menu option				Pops up edit dialog
Delete	menu option				Deletes header

Navigation: Implementation -> Headers -> Add					
Name	Text Box	Yes	Alphanumeric with special characters	<ul style="list-style-type: none"> Name cannot be blank Enter 0 or more characters, up to a maximum of 255. No numeric value at beginning and no space allowed. 	
Value	Text Area	Yes	Alphanumeric with special characters	<ul style="list-style-type: none"> Enter 0 or more characters, up to a maximum of 255. 	Value can either be hardcoded or can be Velocity mapping.
OK	Button				Saves the header details and displays it in the list

7.1.3 Service

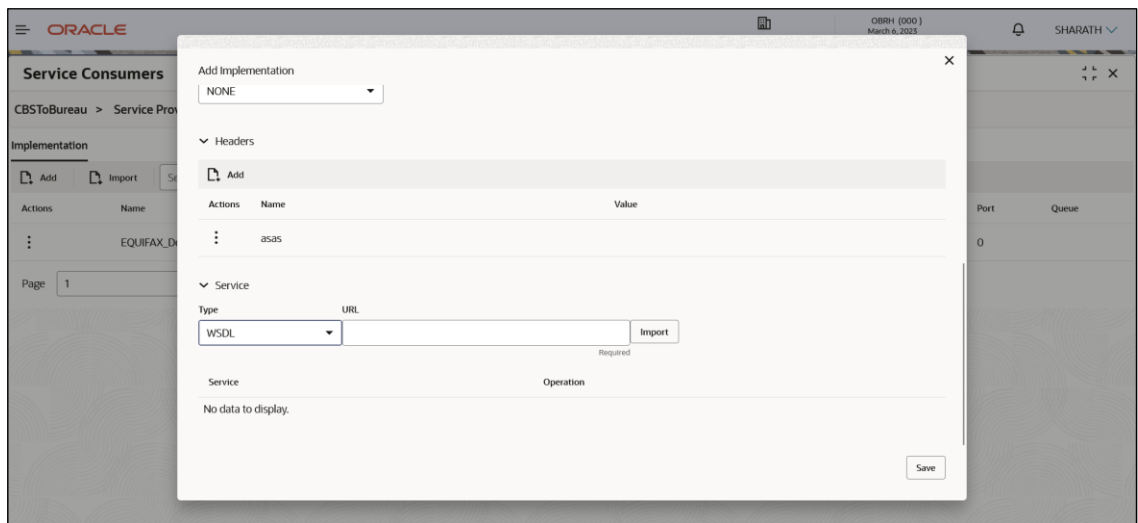

Component briefing			
Component Name	Component Type	Is Mandatory	Comments
Type	Combo Box One	Yes	Predefined Values: WSDL / SWAGGER / OTHERS
URL	Text Box	Yes	Service URL of the file location
Context Path	Text Box		Context path of below formatted URL http://host:port/context-path/endpoint
Import	Button		Extracts the service information from URL and displays it in the Service list

7.1.3.1 WSDL

The Web Services Description Language (WSDL) is an XML-based interface description language that is used for describing the functionality offered by a web service.

Both SSL and non-SSL WSDL URL are supported.

NOTE: In case there is a change in wsdl file, then same wsdl file need to be imported again in order to update the provided service information in routing hub.

7.1.3.2 SWAGGER


Swagger is an Interface Description Language for describing RESTful APIs expressed using JSON.

Currently, Swagger 2.0 & OpenAPI 3.0 both are supported.

NOTE: In case there is a change in swagger file, then same swagger file need to be imported again in order to update the provided service information in routing hub.

7.1.3.3 OTHERS

“OTHERS” option is for adding REST API details manually when provider does not have swagger file.

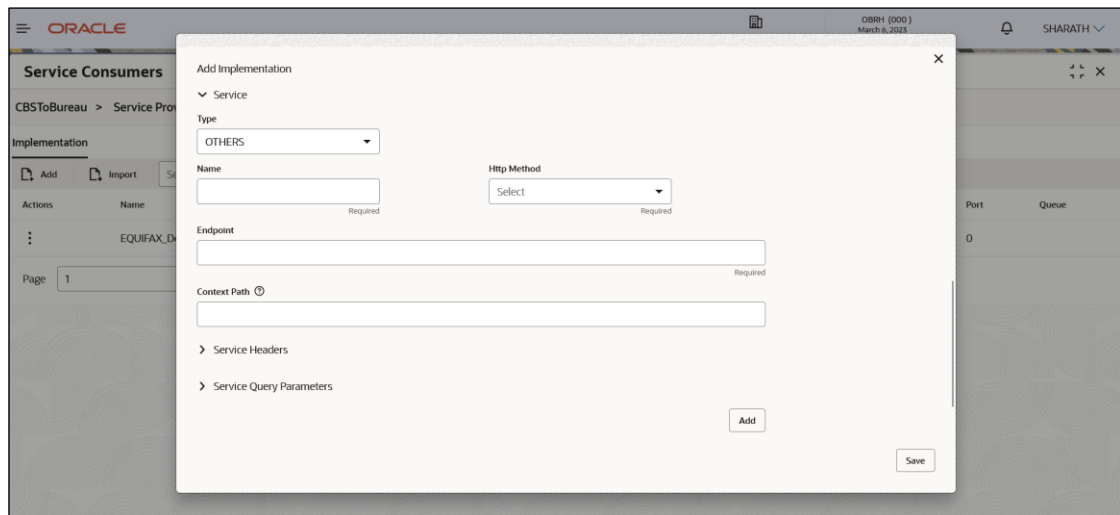

Component briefing				
Component Name	Component Type	Is Mandatory	Validation	Comments
Name	Text Box	Yes	<ul style="list-style-type: none"> Name cannot be blank 	Name of operation

			<ul style="list-style-type: none"> No space allowed at beginning. 	
Http Method	Combo Box One	Yes		Predefined Values: GET / POST / PUT / PATCH / DELETE
Endpoint	Text Box	Yes	<ul style="list-style-type: none"> Endpoint cannot be blank No space allowed at beginning. 	Endpoint URL of operation
Context Path	Text Box			Context path of below formatted URL http://host:port/context-path/endpoint
Service Headers	Collapsible Header & Content			Endpoint specific headers Value can either be hardcoded or can be Velocity mapping.
Service Query Params	Collapsible Header & Content			Endpoint specific query parameters Value can either be hardcoded or can be Velocity mapping.
Add	Button			Adds the endpoint details in the Service list

NOTE: In case there is a change in existing endpoint, then same endpoint details need to be entered again with the new changes in order to update the existing provided service information in routing hub.

7.1.4 Queue

Add Implementation
✕

Name

Required

Description

Required

Type

QUEUE
▼

Default

Queue Broker

WEBLOGIC_JMS
▼

Request Reply Pattern

JMS_MESSAGEID
▼

▼ Request Queue

Connection Factory

Required

Queue

Required

▼ Response Queue

Connection Factory

Queue

Component briefing			
Component Name	Component Type	Is Mandatory	Comments
Queue Broker	Combo Box One	Yes	Predefined Values: WEBLOGIC_JMS
Request Reply Pattern	Combo Box One	Yes	Predefined Values: JMS_MESSAGEID / JMS_CORRELATIONID JMS_MESSAGEID is default request-reply pattern.


<p>Connection Factory</p>	<p>Text Box</p>		<p>Connection Factory is JNDI based connection factory name which is used to create connection for JMS client.</p> <p>Request Connection Factory is mandatory, and Response Connection Factory is optional.</p> <p>Response Connection Factory is needed when destination is going to respond back after processing the request.</p>
<p>Queue</p>	<p>Text Box</p>		<p>Queue Name is JNDI based destination name.</p> <p>Request Queue Name is mandatory, and Response Queue Name is optional.</p> <p>Response Queue Name is needed when destination is going to respond back after processing the request.</p>

7.2 Import

User can create an implementation by importing the JSON file.

User can also import zip file in order to import all the configuration JSON files together (except parent level configuration JSON files).

Navigation: **Implementation -> Import**

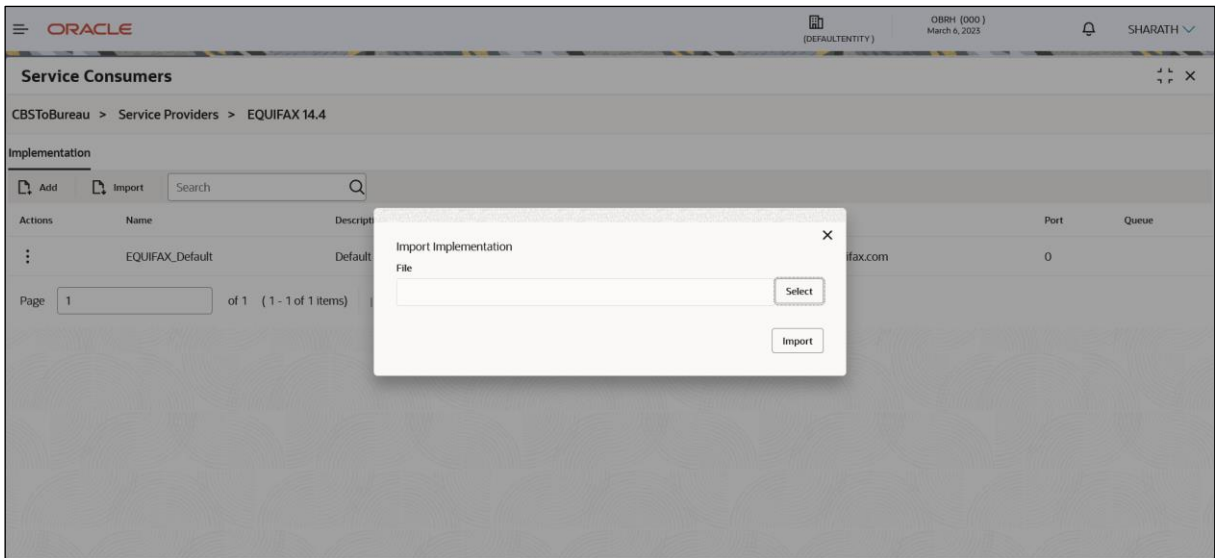

Component briefing						
Component Name	Component Type	Is Mandatory	Data type	Validation	Condition	Comments
File	File picker	Yes		Allows only to select one file	Accepts JSON and ZIP file	Pops up file selection dialog box
Import	Button					Imports Implementation

NOTE: Below data needs to be changed after importing implementation configuration file:

- Implementation Host and Port
- Implementation Authentication Password

7.3 View

User can view implementation details and can also switch to edit form by clicking on edit icon.

Navigation: **Implementation -> Operation Menu (3 dot icon) -> View**

View Implementation ✕

Name
EQUIFAX_Default

Description
Default Implementation

Type	Default	
DEFAULT	On	

Scheme	Host	Port
https	api.sandbox.equifax.com	0

▼ Authentication

Type
NONE

▼ Headers

Actions	Name	Value
No data to display.		

▼ Service

Service	Operation
---------	-----------

No data to display.

7.4 Edit

User can modify the implementation details.

Navigation: **Implementation -> Operation Menu (3 dot icon) -> Edit**

Edit Implementation
✕

Name

Description

Type

Default

Scheme

Host

Port

▼ **Authentication**

Type

▼ **Headers**

+ Add

Actions	Name	Value
No data to display.		

▼ **Service**

Type **URL**


Required

Service	Operation
No data to display.	

7.5 Delete

User can delete the implementation.


Navigation: **Implementation -> Operation Menu (3 dot icon) -> Delete**

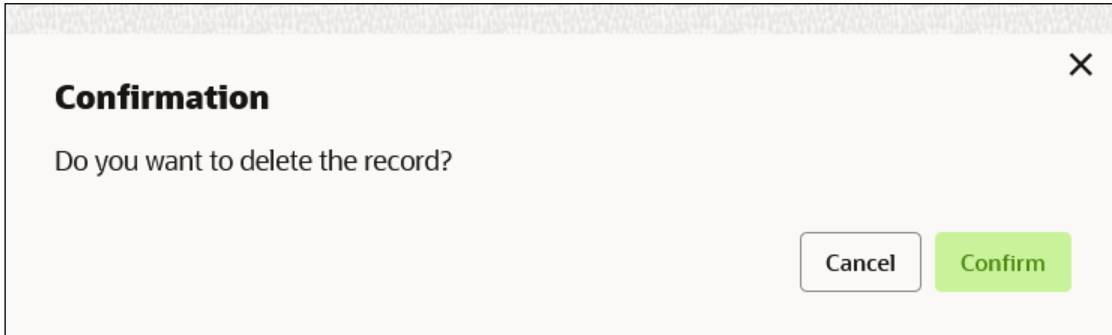

7.6 Export

User can export the implementation configuration as JSON file.

Navigation: **Implementation -> Operation Menu (3 dot icon) -> Export**

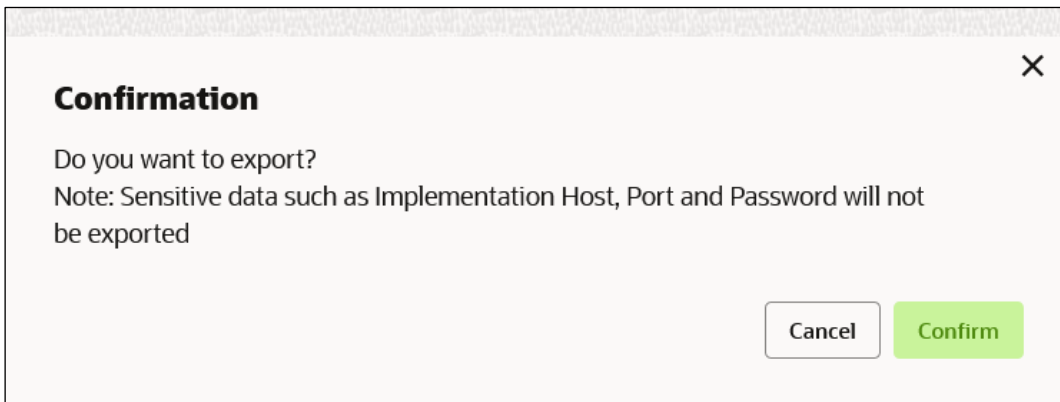

NOTE: Below data will not be exported:

- Implementation Host
- Implementation Port
- Implementation Authentication Password


The above data needs to be configured manually after importing the configuration file.

Same has been mentioned in Import section

7.7 Configuration

End-user can configure the property to disable the token caching.

Navigation: **Implementation -> Operation Menu (3 dot icon) -> Configuration**

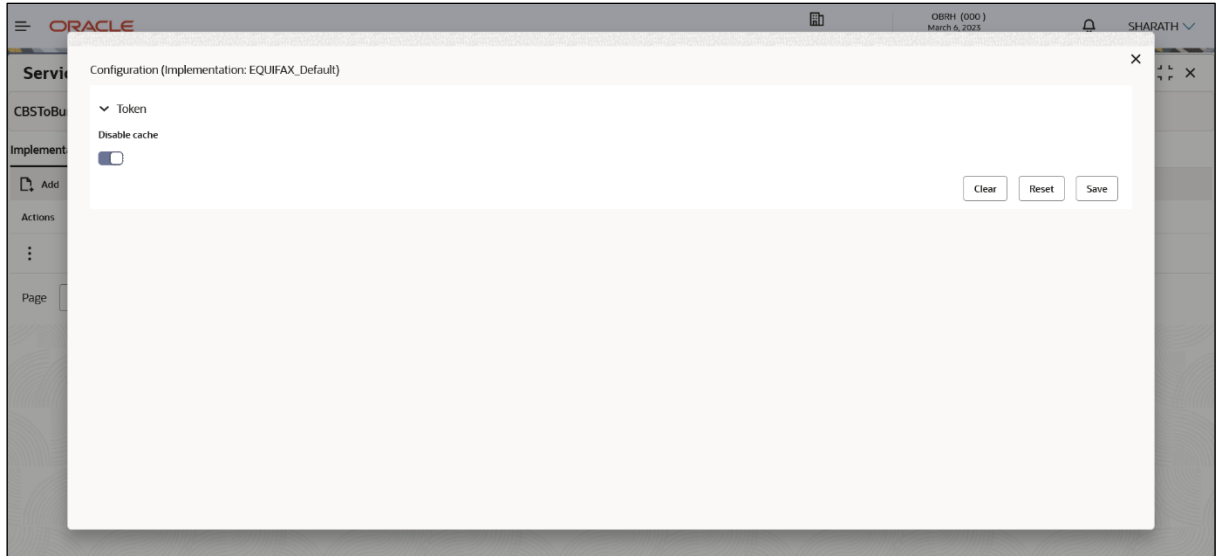


Component briefing				
Component Name	Component Type	Is Mandatory	Validation	Comments
Disable cache	Switch			This property is used to disable the token caching. Default value is false.

8 Consumer Services

Consumer Services defines the service ID which is going to be send from service consumer. This will also cater transformation and route definition as well.

Consumer Services comprises of source integration details.

Navigation: **Core Maintenance -> Routing Hub -> Service Consumers -> <Specific Service Consumer> -> Consumer Services**

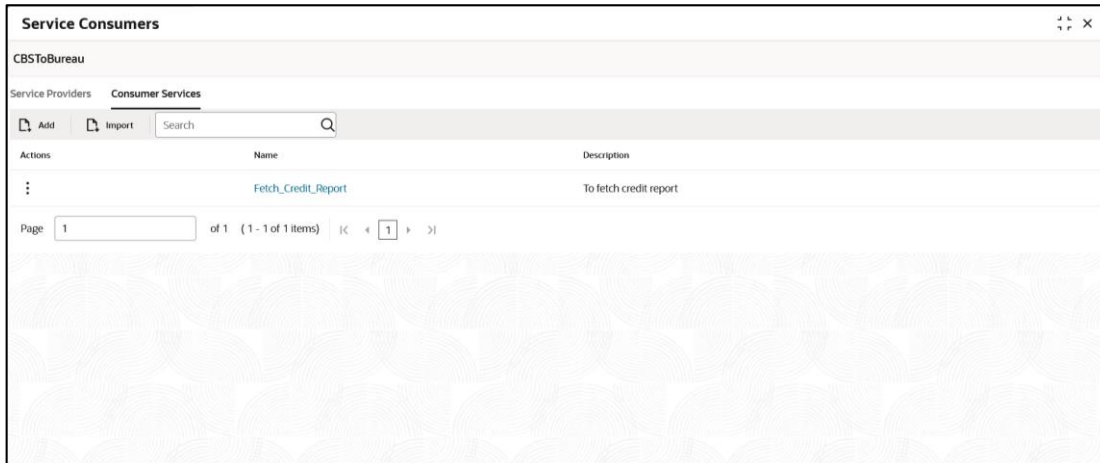


Component briefing			
Component Name	Component Type	Condition	Comments
<Service Consumer>	Button		Navigates back to Service Consumers
Add	Button		Pops up add dialog
Import	Button		Pops up import dialog
Search	Combo Box One		Provides search functionality with case insensitive (Consumer Service Name) Note: Use wildcard character (*) for pattern matching
Navigation: Consumer Services -> 3 dot icon (operation menu)			

View	menu option	Non-editable	Pops up view dialog
Edit	menu option		Pops up edit dialog
Delete	menu option		
Export	menu option		Exports in JSON
Configuration	menu option		Pops up configuration dialog
Request Audit	menu option		Pops up request audit log

8.1 Add

User can create Consumer Service manually.


Navigation: **Consumer Services-> Add**

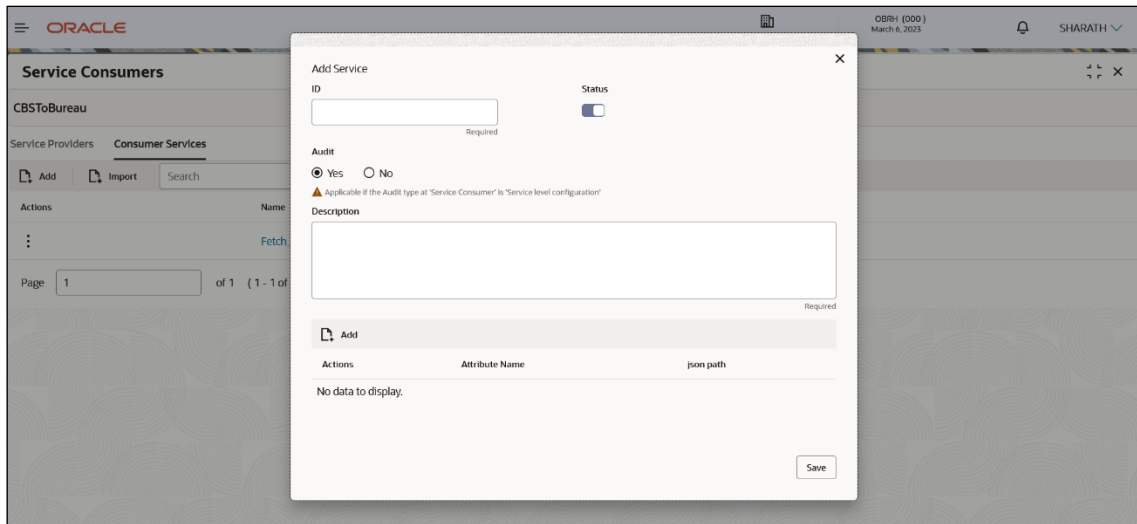

Component briefing					
Component Name	Component Type	Is Mandatory	Data type	Validation	Comments
Id	Text Box	Yes	Alphanumeric with special characters	Name cannot be blank Enter 0 or more characters, up to a maximum of 255. No numeric value at beginning and no space allowed.	Unique Service Id
Status	Switch	Yes			Predefined Values: ACTIVE / INACTIVE If consumer service is marked as inactive, then all related routes will be stopped.

Audit	Radio Button				<p>Predefined Values: Yes / No</p> <p>Yes: This option is for enabling the audit for consumer service and</p> <p>No: This option is for disabling the audit for consumer service.</p> <p>Note: This option is only applicable if audit type at 'Service Consumer' is 'Service level configuration'</p>
Description	Text Area	Yes	Alphanumeric with special characters	<p>Description cannot be blank</p> <p>Enter 0 or more characters, up to a maximum of 1000.</p> <p>No space allowed at beginning or ending of the value.</p>	
Attributes	Table Content				
Save	Button				Saves the Consumer Service

8.1.1 Attributes

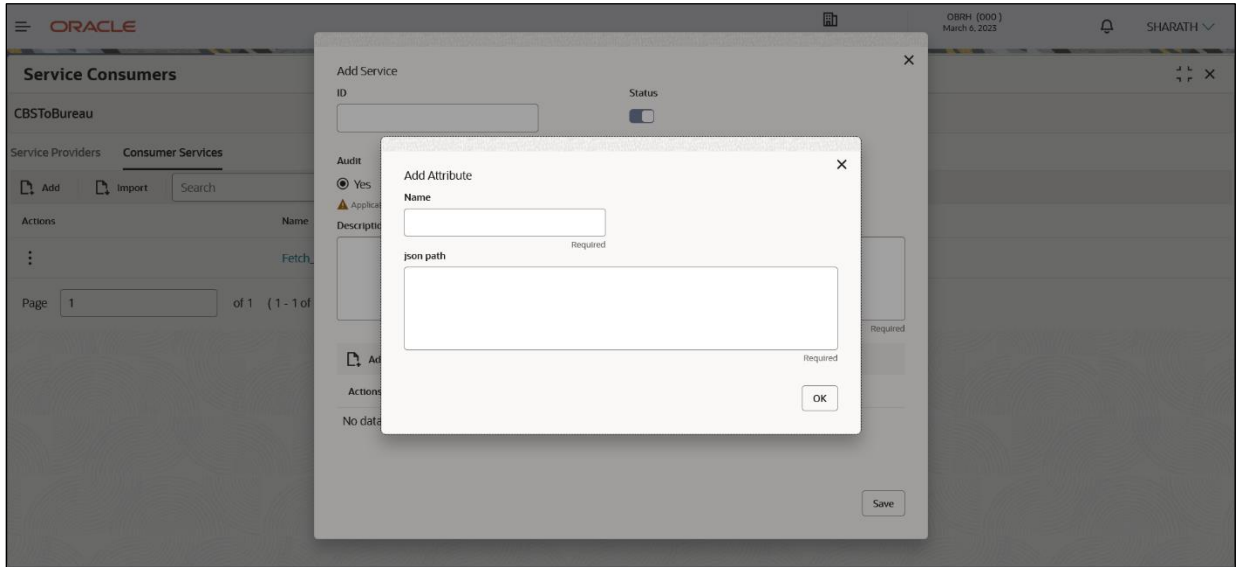

Component briefing						
Component Name	Component Type	Is Mandatory	Data type	Validation	Condition	Comments
Add	Button					Pops up add dialog
Navigation: Consumer Services -> Headers -> 3 dot icon (operation menu)						
Edit	menu option					Pops up edit dialog
Delete	menu option					Deletes attribute
Navigation: Consumer Services -> Headers -> Add						

Name	Text Box	Yes	Alphanumeric with special characters	Name cannot be blank Enter 0 or more characters, up to a maximum of 255. No numeric value at beginning and no space allowed.		
JSON Path	Text Area	Yes	Alphanumeric with special characters	Value cannot be blank Enter 0 or more characters, up to a maximum of 255. No space allowed.		Value will be JSON path.
OK	Button					Saves the header details and displays it in the list

NOTE:


- Using \$.body, user can access request body.
Syntax: \$.body.fieldName
Example: \$.body.branchCode
- Using \$.headers, user can access request headers.
Syntax: \$.headers["fieldname"][0]
Example: \$.headers["branchCode"][0]
- Using \$.env, user can access environment variables.
Syntax: \$.env.group.variable

8.2 Import

User can create a consumer service by importing the JSON file.

User can also import zip file in order to import all the configuration JSON files together (except parent level configuration JSON files).

Navigation: **Consumer Services -> Import**

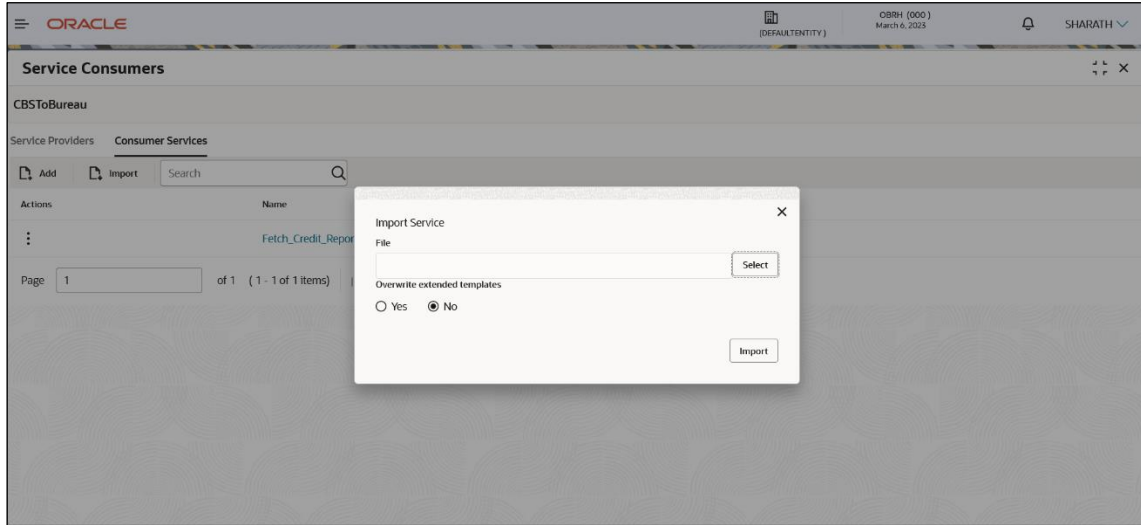


Component briefing						
Component Name	Component Type	Is Mandatory	Data type	Validation	Condition	Comments
File	File picker	Yes		Allows only to select one file	Accepts JSON and ZIP file	Pops up file selection dialog box

Overwrite extended templates	Radio Button	Yes				<p>Predefined Values: Yes / No</p> <p>Yes: This option is for overwriting the extended templates in configuration and</p> <p>No: This option is for retaining the existing extended templates in configuration.</p>
Import	Button					Imports Consumer Service

8.3 View

User can view consumer service details and can also switch to edit form by clicking on edit icon.


Navigation: **Consumer Services -> Operation Menu (3 dot icon) -> View**

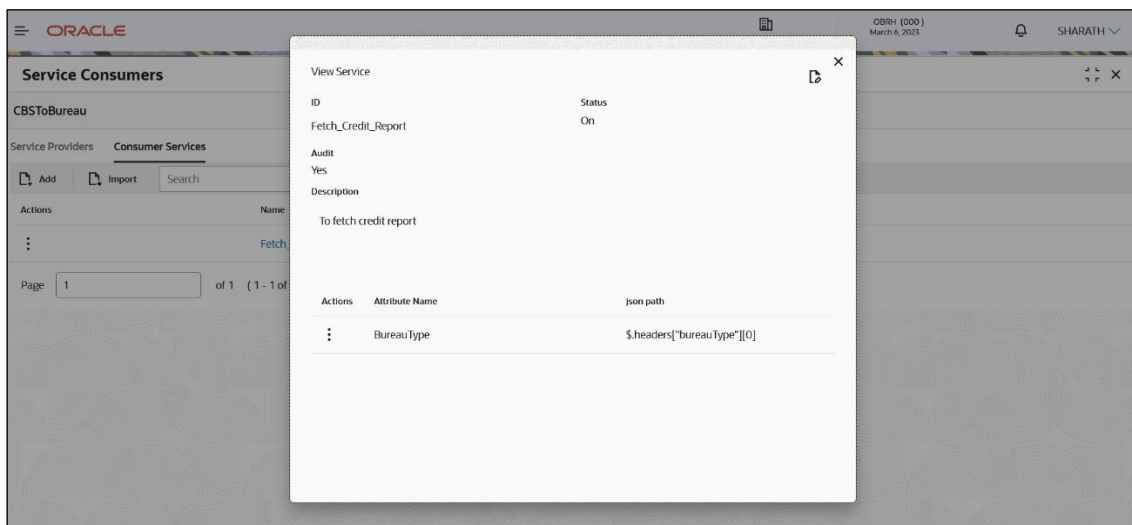

8.4 Edit

User can modify the consumer service details.


Navigation: **Consumer Services -> Operation Menu (3 dot icon) -> Edit**

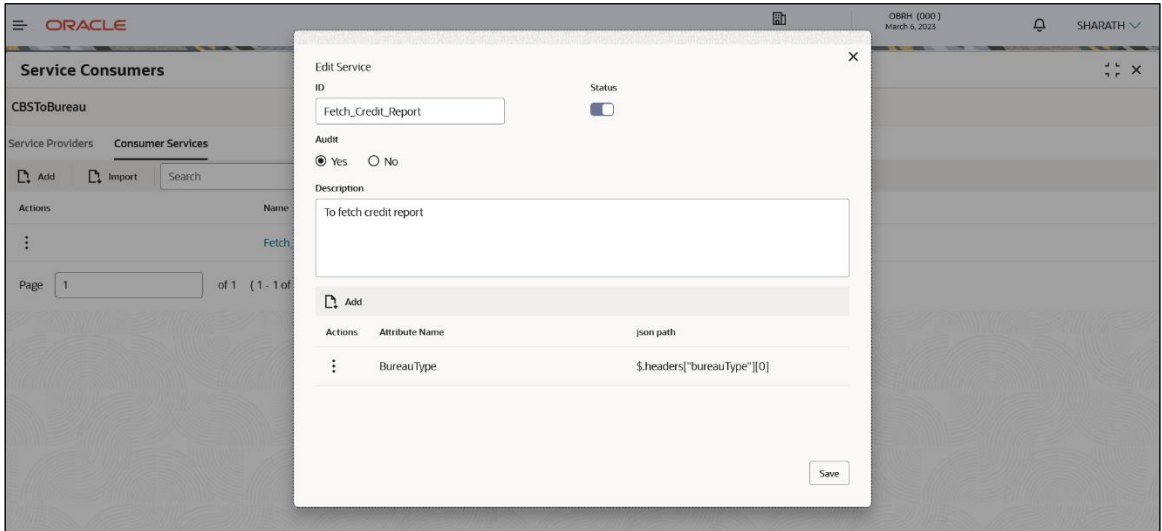

8.5 Delete

User can delete the consumer service.

Navigation: **Consumer Services -> Operation Menu (3 dot icon) -> Delete**

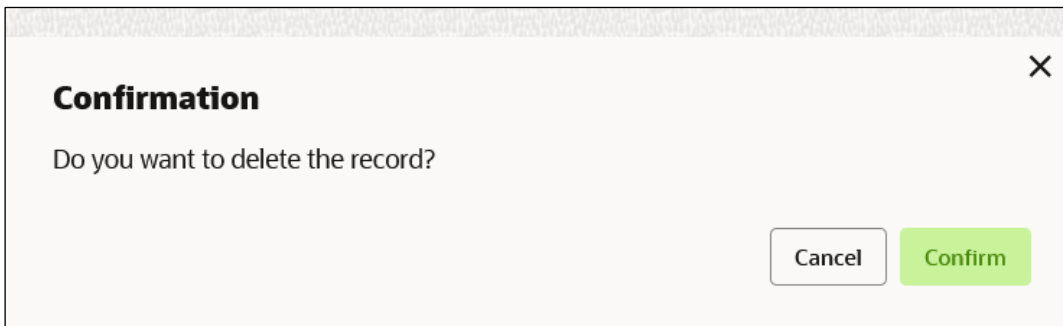

8.6 Export

User can export the consumer service configuration as JSON file.


Navigation: **Consumer Services -> Operation Menu (3 dot icon) -> Export**



9 Transformation

Transformation acts as an assembling and transforming data from source to destination and vice-versa. This will take place under consumer service. This converts data of service consumer into service provider

Navigation: Core Maintenance -> Routing Hub -> Service Consumers -> <Specific Service Consumer> -> Consumer Services -> <Specific Consumer Service> -> Transformation

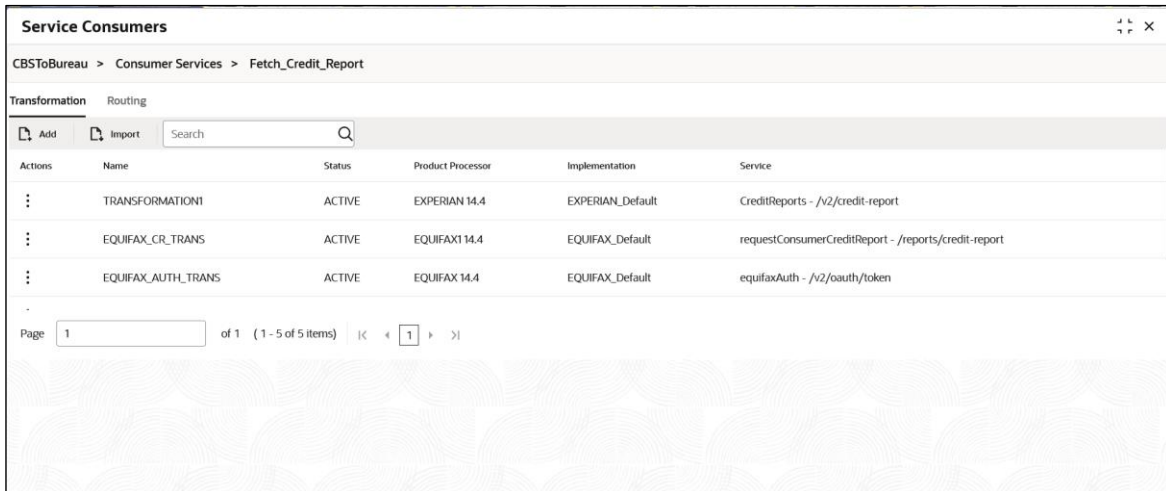

Component briefing			
Component Name	Component Type	Condition	Comments
<Service Consumer>	Button		Navigates back to Service Consumers
<Consumer Service>	Button		Navigates back to Consumer Services
Add	Button		Pops up add dialog
Import	Button		Pops up import dialog
Search	Combo Box One		Provides search functionality with case insensitive (Transformation Name) Note: Use wildcard character (*) for pattern matching

Navigation: Transformation -> 3 dot icon (operation menu)			
View	menu option	Non-editable	Pops up view dialog
Edit	menu option		Pops up edit dialog
Delete	menu option		
Export	menu option		Exports in JSON
Request Audit	menu option		Pops up request audit log

9.1 Add

User can create Transformation manually.

Navigation: **Transformation-> Add**

Add Transformation
✕

Name
Required

Product Processor
Required

Service
Required

Active

Implementation

Product Processor
Required

Service
Required

Service

Operation

Headers

Actions	Name	Value
No data to display.		

Request Transformation

Template Type

Template

Extended Template

Response Headers

Actions	Name	Value
No data to display.		

Response Transformation

Template Type

Template

Mocking required?

Mock Template

Extended Template

Component briefing					
Component Name	Component Type	Is Mandatory	Data type	Validation	Comments
Name	Text Box	Yes	Alphanumeric with special characters	<ul style="list-style-type: none"> Name cannot be blank Enter 0 or more characters, up to a maximum of 255. No numeric value at beginning and no space allowed. 	Unique Transformation Name
Active	Switch				Predefined Values: ACTIVE/INACTIVE If transformation is marked as inactive, then user will not be able to select transformation in routing.
Product Processor	Collapsible Header				
Product Processor	Combo Box One	Yes			Displays provider list relevant to consumer
Implementation	Combo Box One				Displays implementation list relevant to selected provider
Service	Combo Box One	Yes			Displays service list relevant to selected provider and implementation
Service	Collapsible Header & Content				Displays service details of selected service

Headers	Collapsible Header & Content				<p>Displays header list relevant to selected provider, implementation and service</p> <p>User can change the header values.</p> <p>Value can either be hardcoded or can be Velocity mapping.</p>
Path Params	Collapsible Header & Content				<p>Displays path param list relevant to selected service</p> <p>User can change the param values.</p> <p>Value can either be hardcoded or can be Velocity mapping.</p>
Query Params	Collapsible Header & Content				<p>Displays query param list relevant to selected service</p> <p>User can change the param values.</p> <p>Value can either be hardcoded or can be Velocity mapping.</p>
Request Transformation	Collapsible Header				
Body Type	Combo Box One				<p>Predefined Values: RAW / FORM_DATA / BINARY</p> <p>Note: This option is only visible if selected service is REST service.</p>
Type	Combo Box One				<p>Predefined Values: VELOCITY / JSLT / XSLT</p>
Template	Text Area				<p>User has to define the kernel template in which provider accepts.</p> <p>Refer Transformation Type for syntax and Multipart Request</p>

					for sample request if body type is FORM_DATA
Extended Template	Text Area				User has to define the custom template in order to extend the kernel template. Please refer Extensibility and Transformation Type for syntax Note: This option is not visible if body type is FORM_DATA or BINARY.
Response Headers	Collapsible Header & Content				Response Headers is used for specifying additional headers required to be part of routing hub response headers. Value can either be hardcoded or can be Velocity mapping.
Type	Combo Box One				Predefined Values: VELOCITY / JSLT / XSLT
Template	Text Area				User has to define the kernel template in which consumer accepts. Refer Transformation Type for syntax
Mocking required?	Switch				Predefined Values: YES / NO If flag is marked as yes, then routing hub will return the mocked template output (with extended template output if mentioned) to consumer without invoking provider API.
Mock Template	Text Area				User has to define the kernel mocked template in which consumer accepts. Refer Transformation Type for syntax


Extended Template	Text Area				User has to define the custom template in order to extend the kernel template. Refer Extensibility and Transformation Type for syntax
Save	Button				Saves transformation details

9.2 Import

User can create a transformation by importing the JSON file.

User can also import zip file in order to import all the configuration JSON files together (except parent level configuration JSON files).

Navigation: **Transformation -> Import**

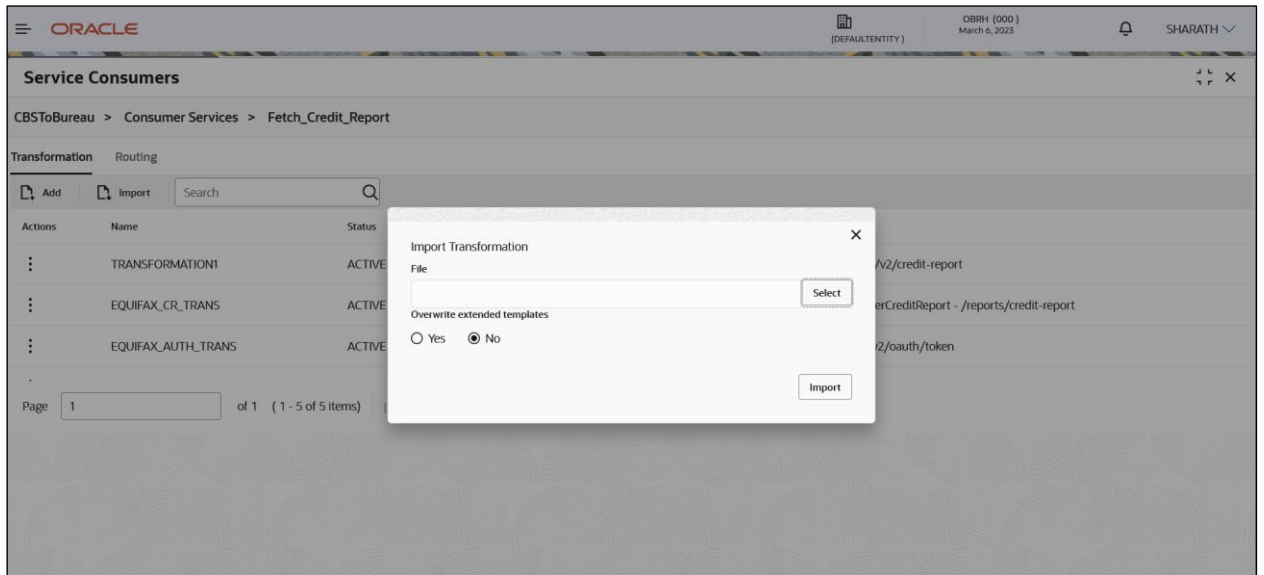

Component briefing					
Component Name	Component Type	Is Mandatory	Validation	Condition	Comments
File	File picker	Yes	<ul style="list-style-type: none"> Allows only to select one file 	Accepts JSON and ZIP file	Pops up file selection dialog box

<p>Overwrite extended templates</p>	<p>Radio Button</p>	<p>Yes</p>			<p>Predefined Values: Yes / No</p> <p>Yes: This option is for overwriting the extended templates in configuration</p> <p>No: This option is for retaining the existing extended templates in configuration.</p>
<p>Import</p>	<p>Button</p>				<p>Imports Transformation</p>

9.3 View

User can view transformation details and can also switch to edit form by clicking on edit icon.

Navigation: **Transformation -> Operation Menu (3 dot icon) -> View**

View Transformation
✕

Name	TRANSFORMATION1	Active	On
<div style="margin-left: 15px;"> Product Processor </div>			
Product Processor	EXPERIAN 14.4	Implementation	EXPERIAN_Default
Service			
CreditReports - /v2/credit-report			
<div style="margin-left: 15px;"> Service </div>			
Service	POST /consumerservices/credit-profile/v2/credit-report	Operation	CreditReports
Headers			
	Name	Value	
⋮	Accept	application/json	
⋮	Authorization	Bearer \$body.access_token	
⋮	clientReferenceId	SBMYSQL	
<div style="margin-left: 15px;"> Path Parameters </div>			
No data to display.			
<div style="margin-left: 15px;"> Query Parameters </div>			
No data to display.			
<div style="margin-left: 15px;"> Request Transformation </div>			
Body Type	RAW	Template Type	VELOCITY
Template			
<pre>{ #set(\$body = \$snapshot.get(0).body) "consumerPI": { "primaryApplicant": { "name": {</pre>			
Extended Template			
<div style="margin-left: 15px;"> Response Headers </div>			
No data to display.			
<div style="margin-left: 15px;"> Response Transformation </div>			
Template Type	VELOCITY	Template	<pre>#set (\$obj = "") ## dummy object #set (\$int_class = \$obj.class.forName("java.lang.Number") #set (\$bool_class = \$obj.class.forName("java.lang.Boolean")</pre>
Mocking required?	Off	Mock Template	
Extended Template			

9.4 Edit

User can modify the transformation details.

Navigation: **Transformation -> Operation Menu (3 dot icon) -> Edit**

Edit Transformation
✕

Active

Product Processor

Product Processor:

Service:

Implementation:

Service: POST /consumerservices/credit-profile/v2/credit-report

Operation: CreditReports

Headers

Actions	Name	Value
⋮	Accept	application/json
⋮	Authorization	Bearer \$body.access_token
⋮	clientReferenceId	SBMYSQL

Path Parameters

Actions	Name	Value
No data to display.		

Query Parameters

Actions	Name	Value
No data to display.		

Request Transformation

Body Type: Template Type:

Template

```

city: "$body.primaryApplicant.address.currentAddress.city",
state: "$body.primaryApplicant.address.currentAddress.state",
zipCode: "$body.primaryApplicant.address.currentAddress.zipCode"
},
"previousAddress": [
  #set($i=0)

```

Extended Template

Response Headers

Actions	Name	Value
No data to display.		

Response Transformation

Template Type:

Template

```

#set ($obj = "") ## dummy object
#set ($int_class =
$obj.class.forName("java.lang.Number"))
#set ($bool_class =
$obj.class.forName("java.lang.Boolean"))

```

Mocking required?


Mock Template

Extended Template

9.5 Delete

User can delete the transformation.

Navigation: **Transformation -> Operation Menu (3 dot icon) -> Delete**

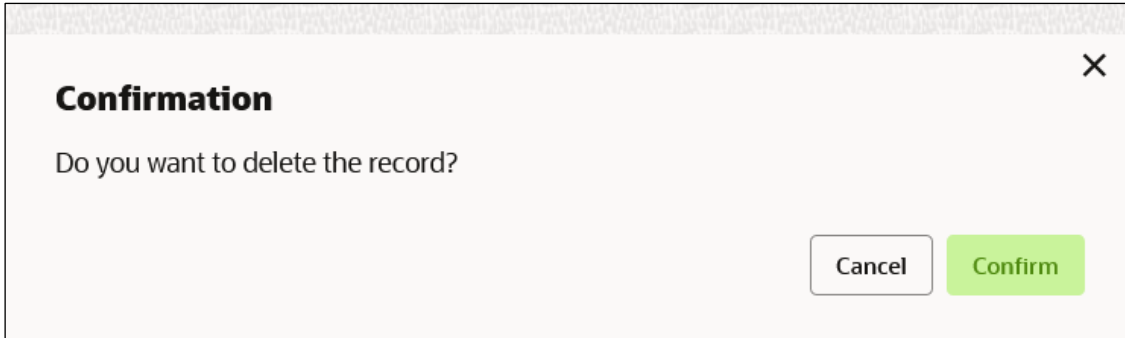

9.6 Export

User can export the transformation configuration as JSON file.

Navigation: **Transformation -> Operation Menu (3 dot icon) -> Export**



10 Routing

Routing defines no rule or rule-based route configuration. Route decide the actual request to be send to which service provider based on maintenance and evaluation.

Navigation: **Core Maintenance -> Routing Hub -> Service Consumers -> <Specific Service Consumer> -> Consumer Services -> <Specific Consumer Service> -> Routing**

The screenshot shows the 'Service Consumers' configuration page in the Routing Hub. The breadcrumb trail is 'CBSToBureau > Consumer Services > Fetch_Credit_Report'. The page title is 'Service Consumers'. Below the title, there is a 'Transformation' section with a sub-tab 'Routing'. An 'Add' button and a search box are present. The main content is a table with columns: Actions, Name, Start/Stop, Rule, Product Processor, Implementation, and Service. Two rows are visible: one for 'Route_EQUIFAX' with rule '(BureauType == "EQUIFAX")' and product processor 'EQUIFAX1 14.4', and another for 'Route_Experian' with rule '(BureauType == "EXPERIAN")' and product processor 'EXPERIAN 14.4'. A pagination bar at the bottom shows 'Page 1 of 1 (1 - 2 of 2 items)'.

Actions	Name	Start/Stop	Rule	Product Processor	Implementation	Service
⋮	Route_EQUIFAX	■	(BureauType == "EQUIFAX")	EQUIFAX1 14.4	EQUIFAX_Default	requestConsumerCreditReport - /reports/credit-report
⋮	Route_Experian	■	(BureauType == "EXPERIAN")	EXPERIAN 14.4	EXPERIAN_Default	CreditReports - /v2/credit-report


Component briefing			
Component Name	Component Type	Condition	Comments
<Service Consumer>	Button		Navigates back to Service Consumers
<Consumer Service>	Button		Navigates back to Consumer Services
Add	Button		Pops up add dialog
Search	Combo Box One		Provides search functionality with case insensitive (Routing Name) Note: Use wildcard character (*) for pattern matching

Navigation: Routing -> 3 dot icon (operation menu)			
View	menu option	Non-editable	Pops up view dialog
Edit	menu option		Pops up edit dialog
Delete	menu option		
Configuratio n	menu option		Pops up configuration dialog
Request Audit	menu option		Pops up request audit log

10.1 Add

User can create Routing manually.


Navigation: **Routing -> Add**

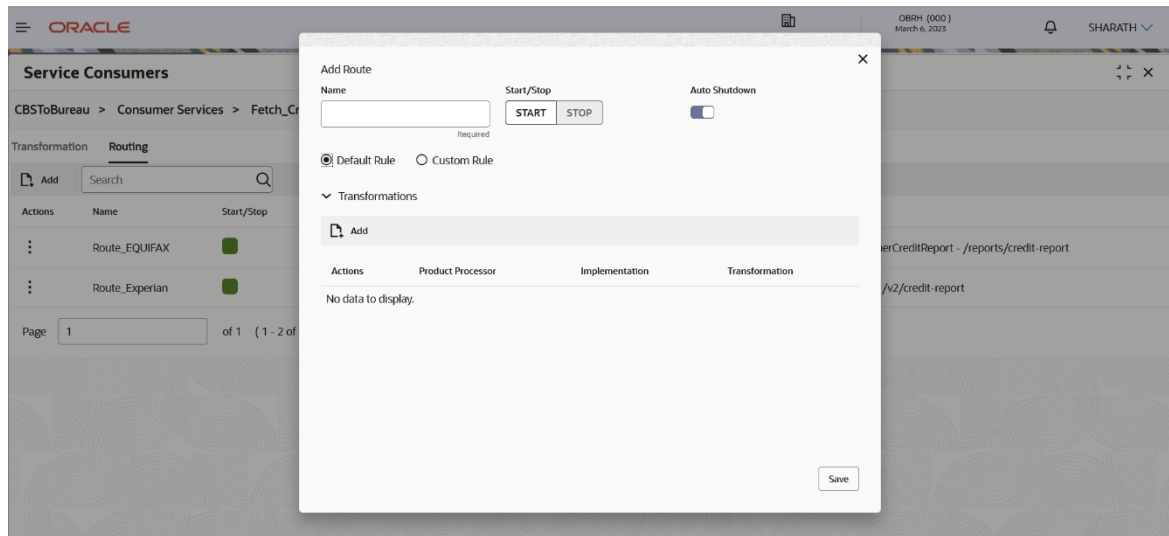

Component briefing			
Component Name	Component Type	Is Mandatory	Comments
Name	Text Box	Yes	Unique routing name
Start / Stop	Switch	Yes	Predefined Values: START / STOP

			If routing is marked as STOP, then consumer request will fail at routing hub level only.
Auto Shutdown	Switch	Yes	Predefined Values: ON / OFF If AutoShutdown flag is ON, then route state will be changed to STOP if route failure goes beyond the threshold failure limit based on the monitoring and alert configuration.
Rule Type	Radio Button	Yes	Predefined Values: Default Rule / Custom Rule
Transformations	Collapsible Header & Content		
Save	Button		Saves the routing details

10.1.1 Add Routing with Custom Rule

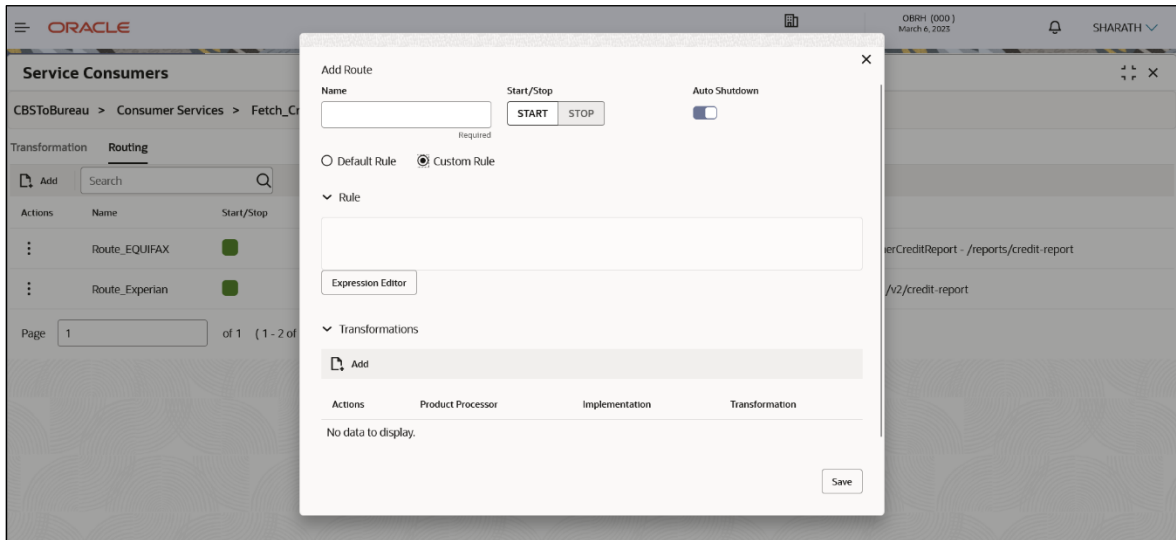

Component briefing				
Component Name	Component Type	Is Mandatory	Data type	Comments
Expression	Text Area	Yes		User can view expression that is formed through expression editor.
Editor	Button			Pops up expression editor dialog

10.1.2 Add Custom Rule using Expression Editor

The screenshot shows a dialog box titled "Expression Editor" with a close button (X) in the top right corner. Inside the dialog, there are four required fields:

- Attribute:** A dropdown menu with "Select" and a "Required" label below it.
- Operator:** A dropdown menu with "Select" and a "Required" label below it.
- Value:** A text input box with a "Required" label below it.
- Condition Type:** A dropdown menu with "Select" and a "Required" label below it.

 A "Save" button is located at the bottom right of the dialog.

Component briefing			
Component Name	Component Type	Is Mandatory	Comments
Attribute	Combo Box One	Yes	Displays list of attributes relevant to consumer service
Operator	Combo Box One	Yes	Logical operators to form an expression
Value	Text Box	Yes	

Condition type	Combo Box One		Conditional Operators
Save	Button		Saves the expression

NOTE: String value should be quoted using single quotes (')
 eg: 'abc'
 List value should be comma separated values and quoted using single quotes (')
 eg: 'abc,xyz,1.23,true'

10.1.3 Transformations

User can define the sequence of transformations for each routing in which request should be processed.

Sequence of transformations in list can be changed by using drag-n-drop feature.

Add Transformation
✕

Product Processor

Select
▼

Required

Implementation

Select
▼

Required

Transformation

Select
▼

Required

▼ Headers

Actions	Name	Value
No data to display.		

▼ Product Processor

Service

▼ Request Transformation

Template Type	Template
---------------	----------

▼ Response Transformation

Template Type	Template
---------------	----------

Mocking required?	Mock Template
-------------------	---------------


OK

Component briefing			
Component Name	Component Type	Is Mandatory	Comments
Product Processor	Combo Box One	Yes	Displays provider list relevant to consumer
Implementation	Combo Box One	Yes	Displays implementation list relevant to selected provider
Transformation	Combo Box One	Yes	Displays transformation list relevant to select provider & implementation
Headers	Collapsible Header & Content		Displays header list relevant to selected implementation and transformation User can change the header values. Value can either be hardcoded or can be Velocity mapping.
Product Processor	Collapsible Header & Content		Displays service details relevant to selected transformation
Request Transformation	Collapsible Header & Content		Displays request transformation template
Response Transformation	Collapsible Header & Content		Displays response transformation template
OK	Button		Saves the transformation details in list

10.2 View

User can view routing details and can also switch to edit form by clicking on edit icon.


Navigation: **Routing -> Operation Menu (3 dot icon) -> View**

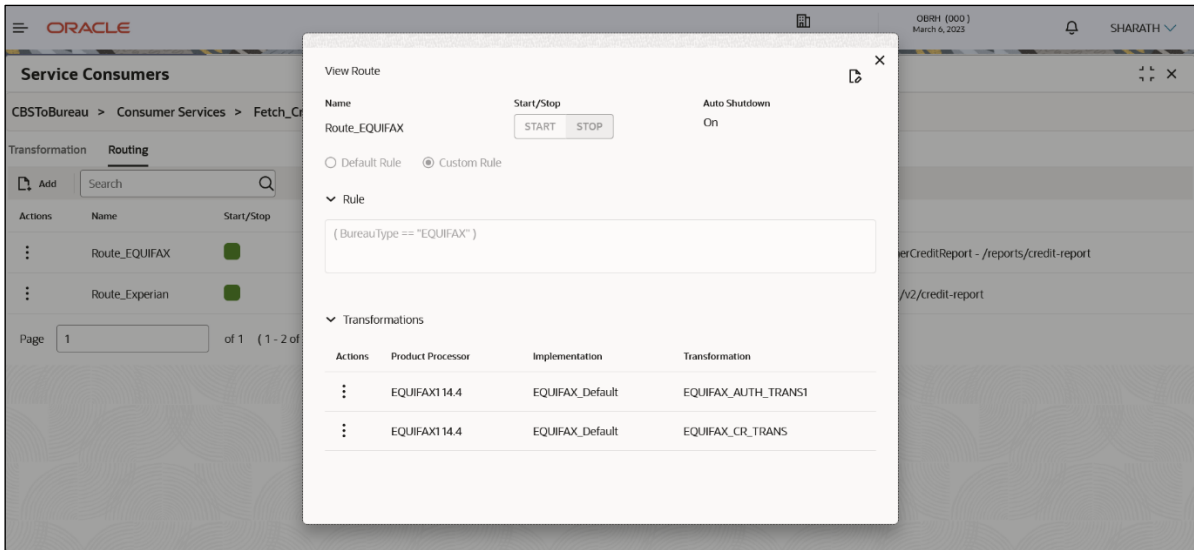

10.3 Edit

User can modify the routing details.


Navigation: **Routing -> Operation Menu (3 dot icon) -> Edit**

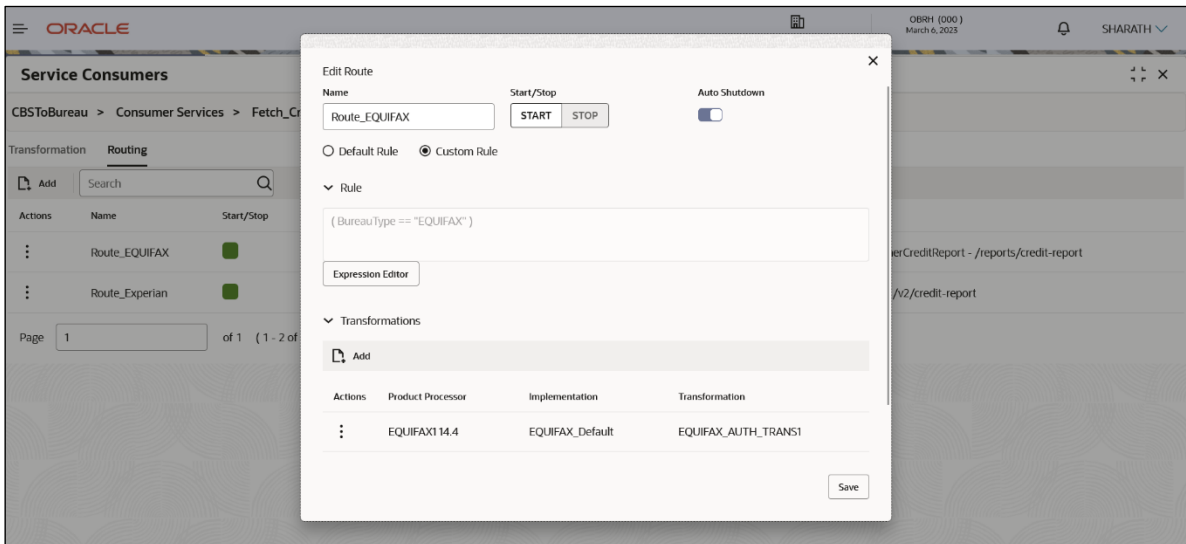

10.4 Delete

User can delete the routing.

Navigation: **Routing -> Operation Menu (3 dot icon) -> Delete**

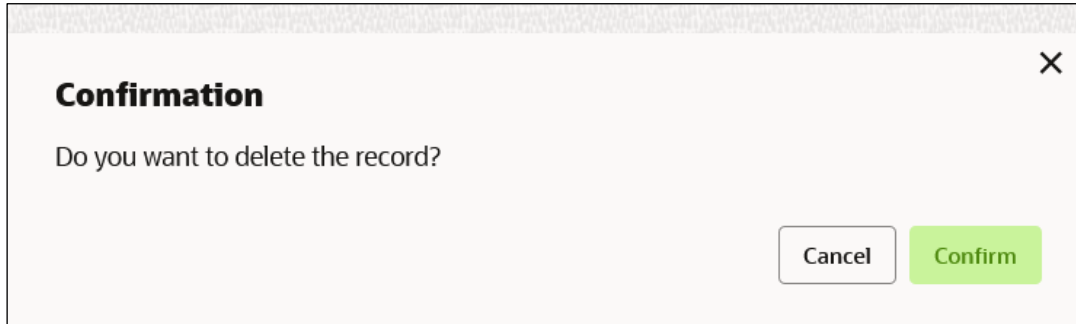

11 Chaining

End-user will be able to define the sequence of transformations for each routing in which request should be processed.

Chaining can be achieved by using snapshot list.


Snapshot list stores the response body and response headers whenever the transformation is processed.

So, end-user can access response body or headers of all processed transformations at any given step.

Syntax:

`$snapshot.get(index).body` or `$snapshot.get(index).headers`

NOTE: `$body` and `$headers` will refer the response body and headers of previous step.

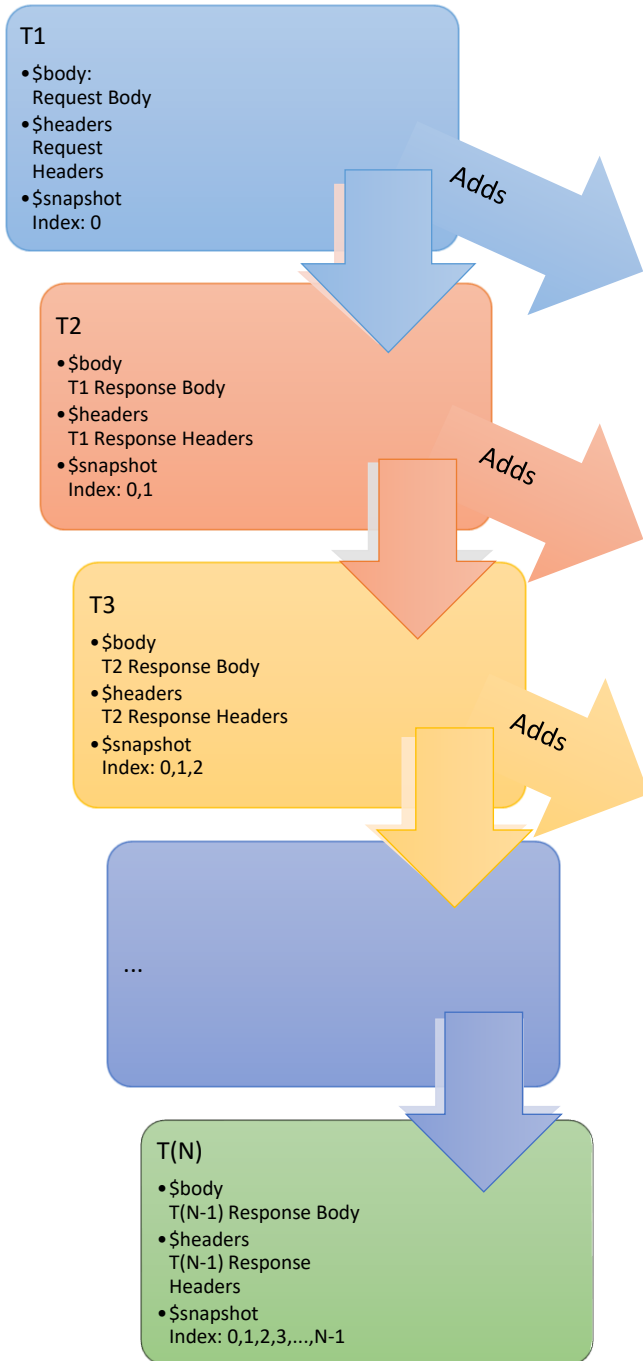

Snapshot List		
Index	body	headers
0	Request Body	Request Headers
1	T1 Response Body	T1 Response Headers
2	T2 Response Body	T2 Response Headers
3	T3 Response Body	T3 Response Headers
...		

12 Extensibility


Extensibility in Routing Hub refers to template extensibility and is achieved by specifying the extended templates for request and response kernel transformation templates.

And as part of extensibility, Routing Hub merges the output of kernel template and custom template in terms of JSON / XML merging.

In case of request, Routing Hub will send the merged output as request payload to provider.

In case of response, Routing Hub will return the merged output as response back to consumer

Example:

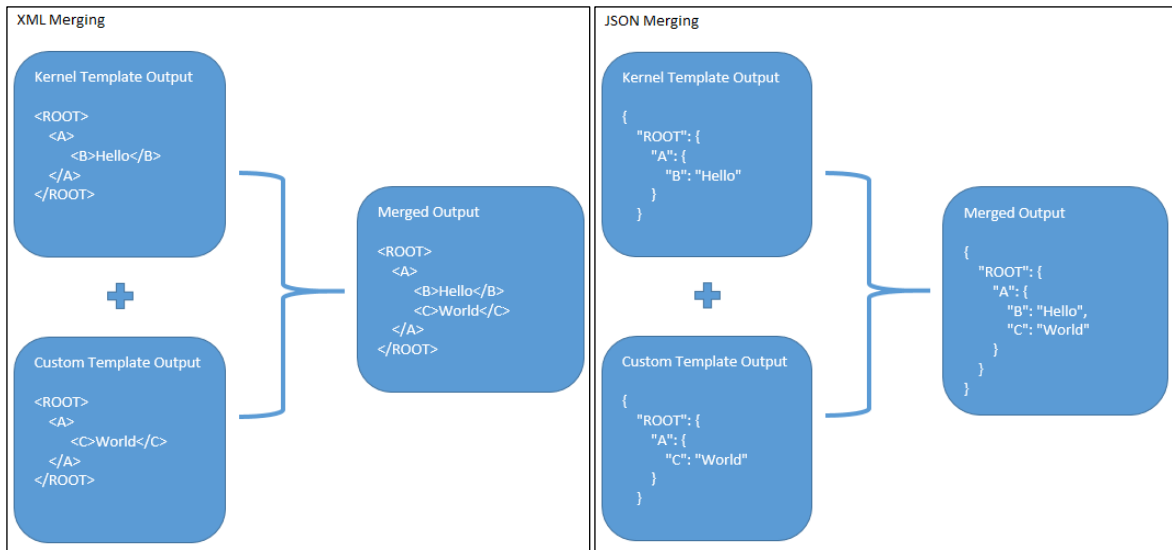

NOTE: Order of existing elements in custom template should be same as kernel template.


12.1 XML merging attributes

12.1.1 Identity Matcher

Matcher attribute must be used when merge action has to be performed for specific element.

Syntax: `merge:matcher='<ATTRIBUTE_NAME>'`

Example:

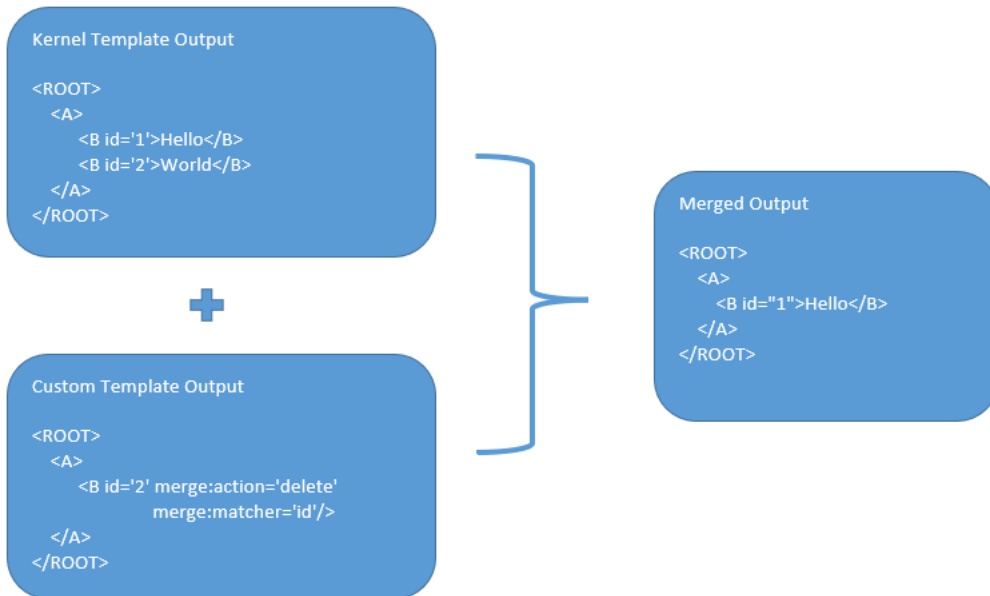


12.1.2 Skip Matcher

Skip matcher strategy is used to insert the elements forcefully without matching the original element and patch element.

Syntax: merge:matcher='SKIP'

Example:

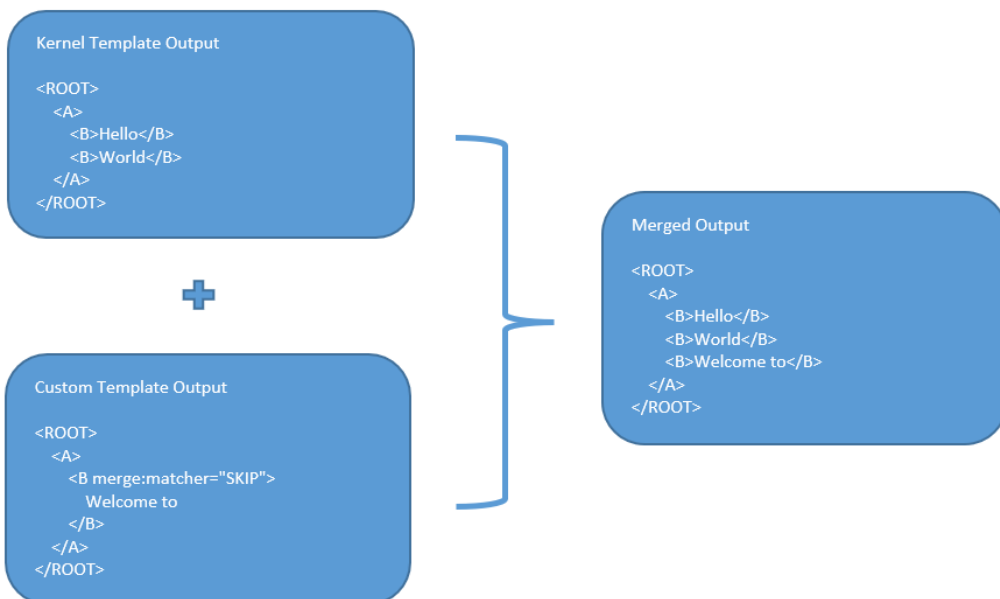


12.1.3 Override Action

Replaces the original element with the patch element only if it exists in kernel/mock template.

Syntax: `merge:action='override'`

Example:

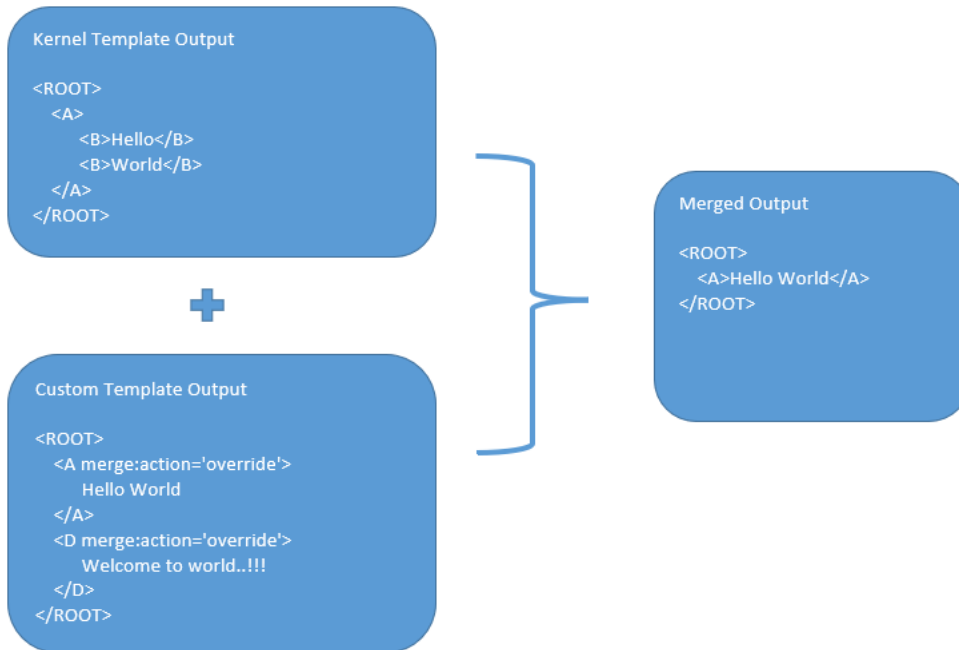


12.1.4 Complete Action

Copies the patch element only if it does not exist in kernel/mock template.

Syntax: `merge:action='complete'`

Example:

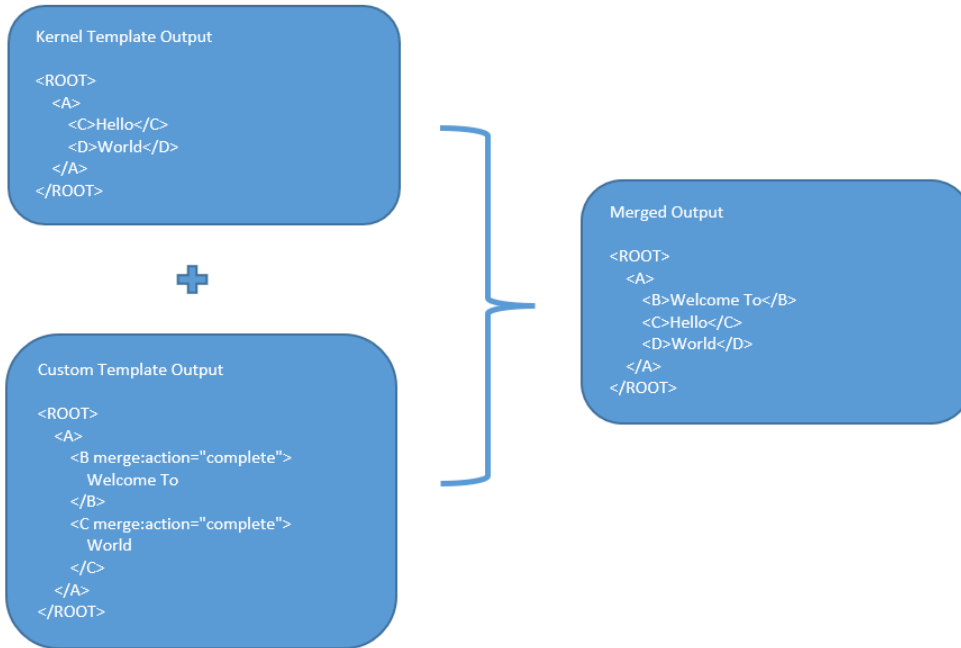


12.1.5 Replace Action

Replaces the original element with the patch element or creates the element if it does not exist in kernel/mock template.

Syntax: `merge:action='replace'`

Example:

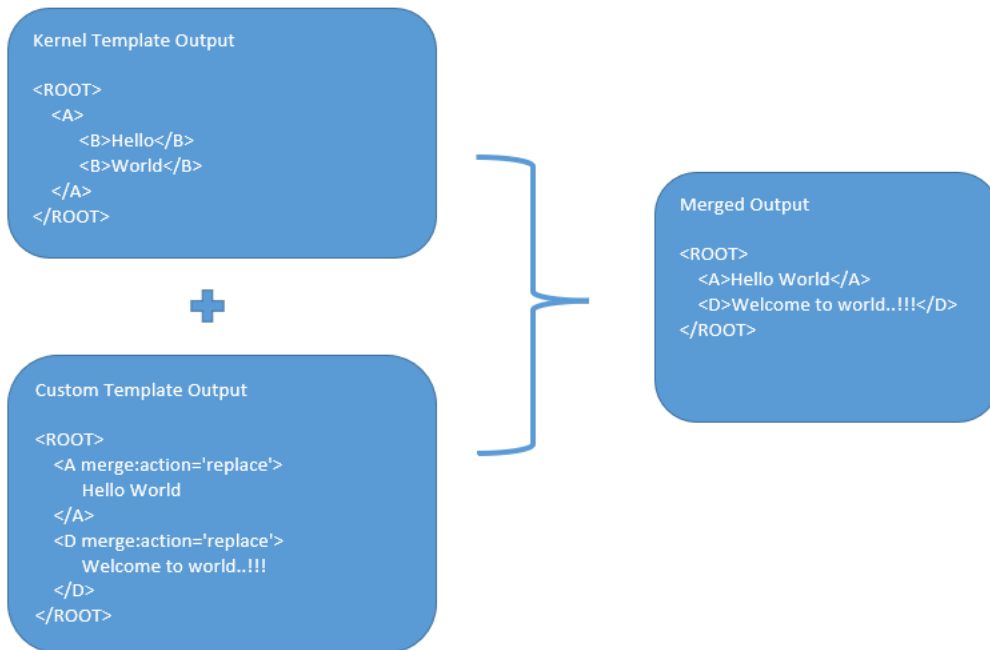


12.1.6 Preserve Action

No replace action is performed on the original element.

Syntax: `merge:action='preserve'`

Example:

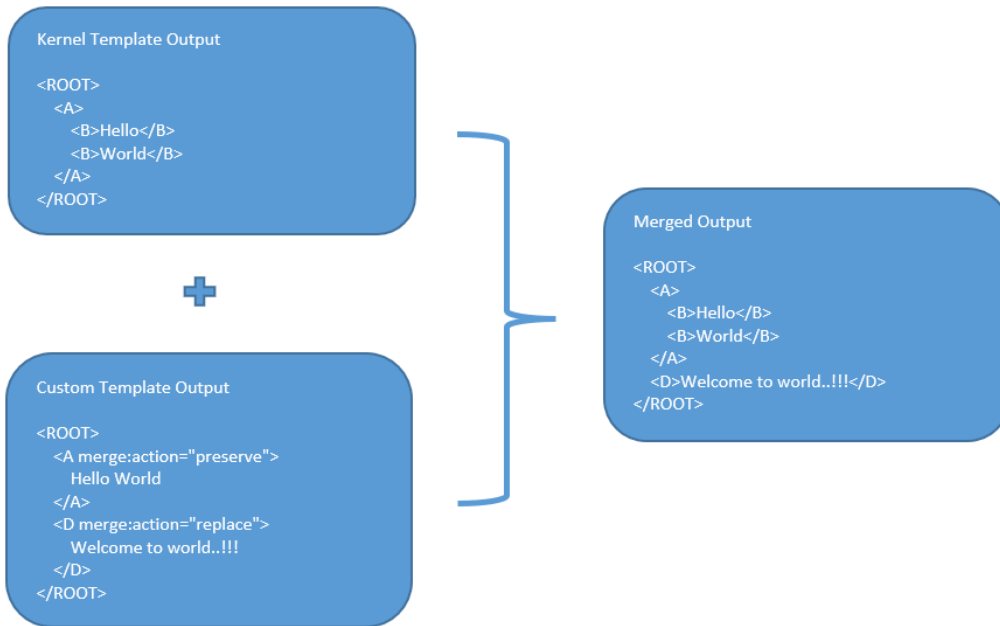


12.1.7 Delete Action

Deletes the original element.

Syntax: `merge:action='delete'`

Example:

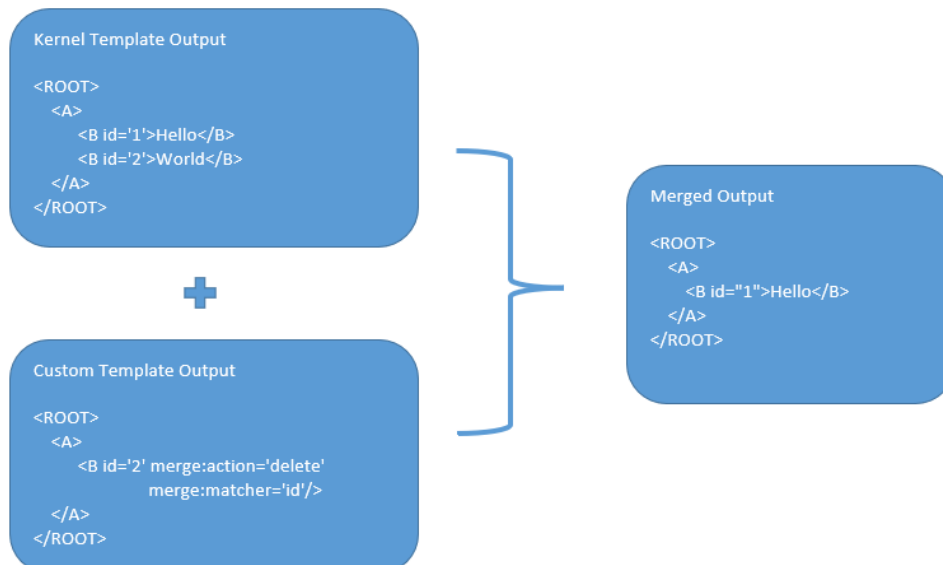

13 Audit purging / archiving

Purging/Archiving of audit data is done on the basis of retention policy.

This process uses plato-batch-server for Job execution.

Below steps are required to schedule purging/archiving job (routingHubAuditRetentionJob) once cmc-obrh-services and plato-batch-server is UP and RUNNING:

1. Open “Configure Tasks” screen (Task Management -> Configure Tasks)
2. Select “Schedule” option
3. Select “Task Name” as routingHubAuditRetentionJob and “Task Trigger Name” will be generated automatically
4. Specify the CRON expression to daily EOD

In order to resolve table space issue of Audit table (CMC_RH_AUDIT_EVENT_LOG), Database Management Team has to configure database job which should be triggered after routingHubAuditRetentionJob.

This database job can be redefining the table (DBMS_REDEFINITION) after purging/archiving is done or other approach.

So, unused LOB segment space can be released.

And in order to resolve table space issue of Audit history table (CMC_RH_AUDIT_EVENT_LOG_HISTORY), Database Management Team has to configure database job to truncate table periodically basis.

14 Multipart request

Below is the sample template for multipart request:

```
[  
  {  
    "key": "file",  
    "type": "FILE",  
    "value": "$body.files.get(0).file"  
  },  
  {  
    "key": "name",  
    "type": "TEXT",  
    "value": "$body.name"  
  }  
]
```

15 Configuration

End-user can configure the properties w.r.t. monitoring, alert and export.

End-user can configure the same at System level and granular levels such as Consumer, Consumer Service and Routing.

Navigation: **Core Maintenance -> Routing Hub -> Configuration**

The screenshot shows a 'Configuration' window with the following sections:

- Monitoring:** Includes 'Window Type' with radio buttons for 'Count' (selected) and 'Time', and a 'Window Size' input field with the value '100'.
- Alert:** Includes 'Minimum number of calls' with an input field containing '0', and 'Failure rate threshold' with a dropdown menu set to '50%'.
- Email Alert:** Includes 'Email Addresses' with an empty text input field.
- Export:** Includes 'Mark data as factory shipped' with a checked checkbox.

Buttons for 'Clear', 'Reset', and 'Save' are located at the bottom right of the window.

Component briefing				
Component Name	Component Type	Is Mandatory	Validation	Comments
Monitoring	Collapsible Header & Content		Monitoring properties are mandatory if alert properties have been configured.	This section has properties that are required by Breaker for storing and aggregating the outcome of calls using WindowType and WindowSize.

Window Type	Radio Button	No		<p>Predefined Values:</p> <p>COUNT / TIME</p> <p>The count-based sliding window aggregates the outcome of the last N calls (Window Size).</p> <p>The time-based sliding window aggregates the outcome of the calls of the last N seconds (Window Size).</p>
Window Size	Number Box	No		<p>This property is used to record the outcome of calls when the CircuitBreaker is closed.</p> <p>In case of count-based sliding window, window size will be N calls.</p> <p>In case of time-based sliding window, window size will be N seconds.</p>
Alert	Collapsible Header & Content		Alert properties are mandatory if monitoring properties have been configured.	This section has properties that are required for transitioning CircuitBreaker.
Minimum number of calls	Number Box	No		<p>If minimumNumberOfCalls is 10, then at least 10 calls must be recorded, before the failure rate can be calculated.</p> <p>If only 9 calls have been recorded the CircuitBreaker will not transition to open even if all 9 calls have failed.</p>

Failure rate threshold	Number Box	No		<p>Configures the failure rate threshold in percentage.</p> <p>When the failure rate is equal or greater than the threshold the CircuitBreaker transitions to open and starts short-circuiting calls.</p>
Email Alert	Collapsible Header & Content			<p>This section has properties that are required for mail notification.</p>
Email Addresses	Text Box	No		<p>Once the failure rate crosses the failureRateThreshold, then end-user will be notified about the event via mail.</p> <p>This property will be semi-colon separated email addresses</p>
Export	Collapsible Header & Content			<p>This section has properties that are required for exporting configuration JSON.</p> <p>This section will be visible at system level only.</p>
Mark data as factory shipped	Switch	Yes		<p>This property is used to mark the exported configuration JSON as factory shipped JSON.</p> <p>So, end-user will not be able to modify or delete the certain data once imported.</p> <p>Default value is false.</p>

Example

Let say

WindowType is Count

WindowSize is 20

Minimum number of calls is 10

Failure rate threshold is 50%

Configured properties will behave as below:

After 10 (min number of calls) calls, routing would get shutdown if 50% (failure rate) of atmost last 20 (window size) calls have failed.

And if email address property is configured, then end-user will be notified as well.

16 Audit Log

Check audit log on the below navigation path for Oracle Banking Routing Hub

Navigation: **Core Maintenance -> Routing Hub -> Request Audit -> Log**

Request Audit Details

Request Id
wC97q1ZAGj1xC97q1ZAGj1yC97q1ZAGj1zC97q1ZAGj1AC97q1ZAGj1BC97q1ZAGj1CC97q1ZAGj1DC97q1ZAGj1EC97q1ZAGj1FC97q1ZAGj1GC97q1ZAGj1HC97q1ZAGj1

Timestamp
2023-05-10T10:52:26.953Z

Message

```
{
  "headers": {
    "branchCode": [
      "000"
    ],
    "SERVICE-CONSUMER-SERVICE": [
      "PARTY_CASA_ACCOUNTS_LIST"
    ],
    "applid": [
      "CMNCORE"
    ],
    "entityId": [
      "DEFAULTENTITY"
    ],
    "userid": [

```

Component briefing			
Component Name	Component Type	Condition	Comments
Consumer	Text Box		Consume Name
Consumer Service	Text Box		Service Consumer Name
Provider	Text Box		Provider Name
Provider Implementation	Text Box		Provider Implementation Name
Provider Service	Text Box		Provider Service Name
Transformation	Text Box		Transformation Name
Route	Text Box		Route Name
Request Id	Text Box		Correlation Id
User Id	Text Box		User Id
Reference No	Text Box	Max length is 255 characters	In order to track the requests in routing hub, end-user must pass rh-reference-no header.
Search	Button	Search is done based on below things: <ul style="list-style-type: none"> • Case insensitive • Pattern matching • Single / Multi Column search 	Performs search operation with specified values

NOTE: End-user has to use wildcard character (*) to match an arbitrary number of characters as search pattern for all fields except Request Id.

Clicking on “RequestId” value will display step by step execution of request with data such as Routing Hub Request & Timestamp, Provider Request & Timestamp, Provider Response & Timestamp, Routing Hub Response & Timestamp.

17 Monitoring Dashboard

Monitoring dashboard has been provided to System integrators and IT administrators to review the health of the integrations. It displays data using different type of widgets to help users to assess the performance of integrations and identify the areas that requires attention.

This dashboard requires 'routingHubAuditSummaryJob' job to be executed periodically using plato-batch-server.


Below are steps to schedule the job once cmc-obrh-services and plato-batch-server is UP and RUNNING:

1. On **Home** Screen, Click **Task Management**
2. Under **Task Management**, Click "**Configure Tasks**"
3. Select "**Schedule**" option
4. Select "**Task Name**" as routingHubAuditSummaryJob and "**Task Trigger Name**" will be generated automatically.
5. Specify the CRON expression to daily EOD

To resolve table space issue of Audit summary table, (CMC_RH_AUDIT_SUMMARY), Database Management Team has to configure database job to truncate table periodically basis.

NOTE: Monitoring Dashbord will also be not available if Audit logs are turned off

Navigation: **Core Maintenance -> Routing Hub -> Monitoring Dashboard**

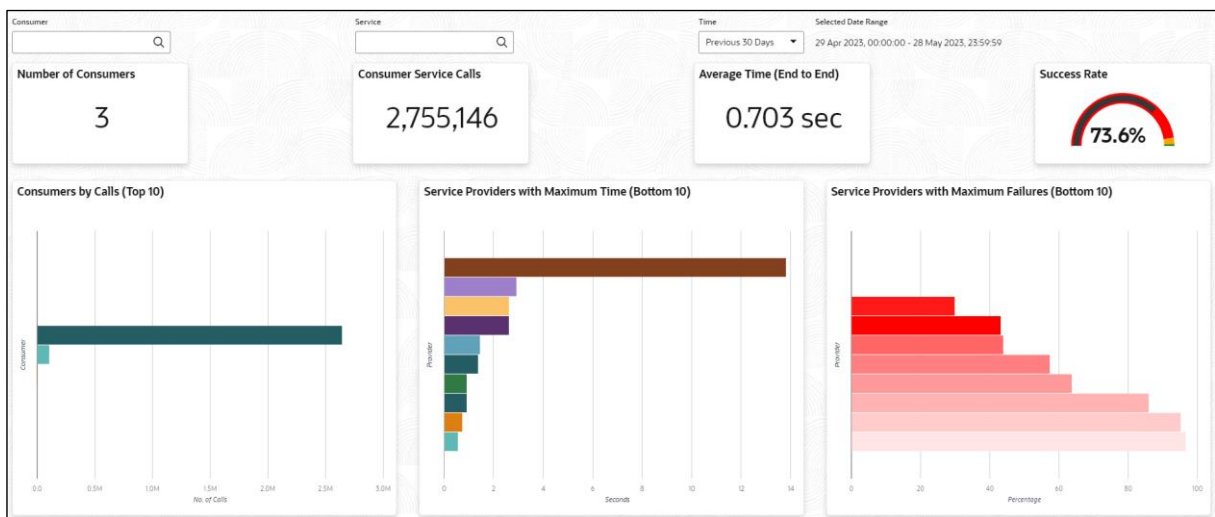

Number of Consumers: This widget displays total number of consumers configured in the Oracle Banking Routing Hub.

Consumer Service Calls: This widget displays total number of consumer services requested during chosen period.

Average Time (End to End): This widget displays the average time (in seconds) taken to process successful requests, during chosen period.

Success Rate: This widget provides an indicator of how many successful requests were made during chosen period.


Consumers by Calls (Top 10): This widget provides a graphical display of the top 10 consumers based on requests they have made during chosen period. A link on the bar graph is provided to view further details of the Consumer.

Service Providers with Maximum Time (Bottom 10): This widget provides a graphical display of bottom 10 providers based on the time taken to process requests, during s chosen period.

Service Providers with Maximum Failures (Bottom 10): This widget provides a graphical display of bottom 10 providers based on failed requests, during s chosen period.

Consumer Page

End-user can navigate to this page by either using the filter option provided on the landing page or by clicking on specific consumer service in “Consumer Service by Calls (Top 10)” chart

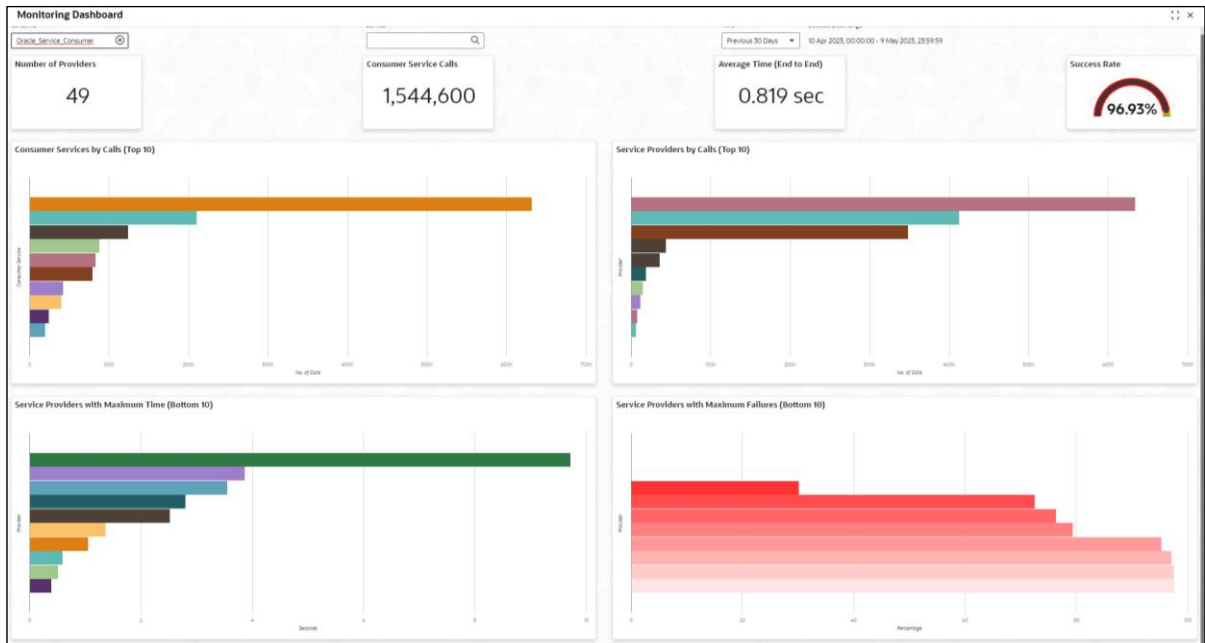

This page displays following information:

Number of Providers: This widget displays the total number of service providers configured in Oracle Banking Routing Hub for the selected consumer.

Consumer Service Calls: This widget displays total number of consumer services requested by the selected consumer during chosen period.

Average Time (End to End): This widget displays the average time (in seconds) taken to process successful requests made by the selected consumer, during chosen period.

Success Rate: This widget provides an indicator of how many successful requests were made by the selected consumer during chosen period.

Consumer Services by Calls (Top 10): This widget provides a graphical display of the top 10 consumers Services during chosen period. A link on the bar graph is provided to view further details of the Consumer Service.

Service Providers by Calls (Top 10): Shows top 10 service providers based on the maximum requests which are requested chosen period.

Service Providers with Maximum Time (Bottom 10): Shows bottom 10 providers based on the maximum time taken to process successful requests which are requested during chosen period.

Service Providers with Maximum Failures (Bottom 10): Shows bottom 10 providers based on the maximum number of failed requests which are requested during chosen period.

Consumer Service Page

End-user can navigate to this page by either using the filter option provided on the landing page or by clicking on specific consumer service in “Consumer Service by Calls (Top 10)” chart.

The screenshot shows a 'Monitoring Dashboard' for the consumer 'Oracle_Service_Consumer'. It features four summary cards: 'Number of Providers' (2), 'Consumer Service Calls' (631,128), 'Average Time (End to End)' (0.563 sec), and 'Success Rate' (97.74%). Below these is a table with columns for 'Request Id', 'Time in Routing Hub (sec)', 'Time in Service Providers (sec)', and 'Total Time (sec)'. The table lists various request IDs and their corresponding times. At the bottom, there is a pagination control showing 'Page 1 of 30225 (1 - 10 of 302244 items)'.

Number of Providers: This widget displays total number of service providers to which this request is routed to complete the integration.

Consumer Service Calls: This widget displays total number of consumer services made during chosen period.


Average Time (End to End): This widget displays the average time taken to process successful requests made during chosen period.

Success Rate: Shows the percentage of successful requests which are made during chosen period.

Request Details: The table displays the list of requests which are requested during chosen period. Following are the details which are provided for each request

Component Name	Component Type
Request Id	This is system generated reference number for each request. Click on the Request Id displays audit log information of the request.
Time in Routing Hub (Sec)	This field displays the time taken by Routing Hub (in seconds) to route the request between Consumer Service and Providers.
Time in Service Providers (Sec)	This field displays the total time taken by Service provides (in seconds) to process the request.
Total Time (Sec)	This field displays the total time to process the request
Provider Service	Text Box
Details	Displays the tabular view of the time taken by individual providers (in case of chaining of the request)

End-user can view request details by clicking on Request Id.

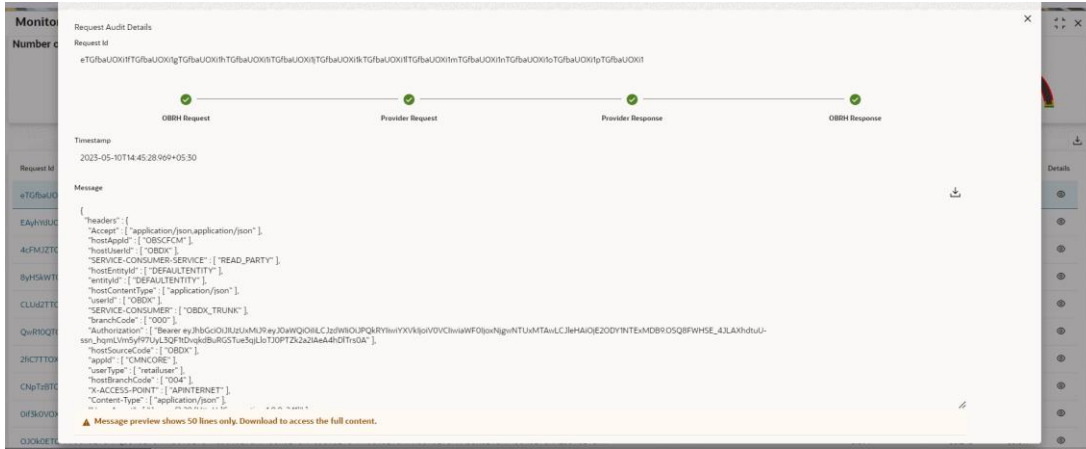

Component Name	Comments
Number of Providers	Shows total number of service providers
Consumer Service Calls	Shows total number of consumer services requested during selected time
Average Time (End to End)	Shows the average time taken to process successful requests which are requested during selected time
Success Rate	Shows the percentage of successful requests which are requested during selected time
Request Audit	Shows list of requests which are requested during selected time

18 Transformation Type

18.1 Velocity

Velocity is a Java-based template engine.

Velocity can be used to generate XML files, SQL, PostScript and most other text-based formats.

NOTE: In routing hub, Velocity will be used to generate JSON and XML.

- Using **\$body**, user can access request/response body.
Syntax: `$body.fieldName`
Example: `$body.branchCode`
- Using **\$headers**, user can access request/response headers.
Syntax: `$headers["fieldName"][0]`
Example: `$headers["branchCode"][0]`
- Using **\$bodyAsString**, user can access response body as string.
Syntax: `$bodyAsString`
- Below are some available extension methods:
 - Date Conversion
Syntax: `$dateUtil.convert(inputDate, fromPattern, toPattern)`
Parameters:
 - `inputDate` - String
 - `fromPattern` - String
 - `toPattern` - String**Returns:** String
Please refer <https://docs.oracle.com/javase/8/docs/api/java/text/SimpleDateFormat.html> for different patterns
 - Default Value
Syntax: `$custom.defaultValue(inputValue, defaultValue)`
Parameters:
 - `inputValue` - Object
 - `defaultValue` - String**Returns:** Object

- Null Check
 - Syntax:** \$custom.isNull(inputValue)
 - Parameters:**
 - inputValue - Object
 - Returns:** Boolean
- Random Number
 - Syntax:** \$mathUtil.getRandom()
 - Returns:** Object of Random class (java.util.Random)
- Xml Tool
 - Syntax:** \$xml.methodName()
 - Please refer**
<https://velocity.apache.org/tools/3.1/apidocs/org/apache/velocity/tools/generic/XmlTool.html>
- Date Tool
 - Syntax:** \$date.methodName()
 - Please refer**
<https://velocity.apache.org/tools/3.1/apidocs/org/apache/velocity/tools/generic/DateTool.html>
- Json Tool
 - Syntax:** \$json.methodName()
 - Please refer**
<https://velocity.apache.org/tools/3.1/apidocs/org/apache/velocity/tools/generic/JsonTool.html>
- Math Tool
 - Syntax:** \$math.methodName()
 - Please refer**
<https://velocity.apache.org/tools/3.1/apidocs/org/apache/velocity/tools/generic/MathTool.html>
- Number Tool
 - Syntax:** \$number.methodName()
 - Please refer**
<https://velocity.apache.org/tools/3.1/apidocs/org/apache/velocity/tools/generic/NumberTool.html>

➤ Escape Tool

Syntax: \$esc.methodName()**Please refer**<https://velocity.apache.org/tools/3.1/apidocs/org/apache/velocity/tools/generic/EscapeTool.html>

➤ Serialization of object into its equivalent Json representation

Syntax: \$custom.toJson(src)**Parameters:**

- src - Object

Returns: String

➤ Get additional field's value based on fieldname

Syntax: \$custom.getFieldValueById(jsonString, fieldname)**Parameters:**

- jsonString – String
- fieldname - String

Returns: String

➤ Get list of additional fields based on fieldname prefix

Syntax: \$custom.getAdditionalFieldSetByType(jsonString,prefixval)**Parameters:**

- jsonString – String
- prefixval - String

Returns: List

➤ This method is for parsing XML string

Syntax: \$custom.parseXml(xmlString)**Parameters:**

- xmlString - String

Returns: Object

- If issue occurred with hyphen in velocity template of Request or Response Transformation, then use get method.

Example:

```
<FCUBS_BODY>
  <Customer-IO>
    <CUSTNO>003942</CUSTNO>
  </Customer-IO>
</FCUBS_BODY>
```

If "\$in.FCUBS_BODY.Customer-IO.CUSTNO" does not work ,
Use "\$in.FCUBS_BODY.get("Customer-IO").CUSTNO" to get customer number.

18.2 XSLT

XSLT is a language for transforming XML documents into other XML documents, or other formats such as HTML for web pages, plain text or XSL Formatting Objects, which may subsequently be converted to other formats, such as PDF, PostScript and PNG.

NOTE: In routing hub, XSLT will be used to transform arbitrary XML to JSON.

18.3 JSLT

JSLT is a complete query and transformation language for JSON.

19 Oracle Banking Routing Hub Integration Specification

19.1 Token Generation

PlatoJWTAuth endpoint signature -

- Path : /platojwtauth
- Headers:
 - appld : SECSR001
 - Content-Type : application/json
- Request Body:


```
{
  "username": "",
  "password": ""
}
```

 - Username and password will be base64 encoding of plaintext.
- Response Body:


```
{
  "token": "",
  "userAlreadyLoggedIn": "Y",
  "expires_in": 3180,
  "home_entity_id": "DEFAULTENTITY",
  "multi_entity_admin": "N",
  "multi_entity_admin_locale": ""
}
```

Example - Below are the screenshots

Headers

KEY	VALUE	DESCRIPTION	***	Bulk Edit	Presets
<input checked="" type="checkbox"/> appld	SECSR001				
<input checked="" type="checkbox"/> Content-Type	application/json				


- Request Body:
 - Any valid JSON/XML payload which shall act as input to the transformation template in request transformer.
- Response Body:


```
{
  "data": {}
  "messages": {}
}
```


 - If the route invocation succeeds, data JSON member would contain the transformed (optional) response of the provided service. If it's a provided web service and no response transformation template is supplied, XML Soap Body of response would be converted into JSON object and sent in data JSON member.
 - If the route invocation fails due to misconfigured route or connection time out to ServiceProviderImpl or some other reason, relevant error messages would be sent in messages JSON member. In that case, data JSON member would be null or empty.

Example - Below are the screenshots of route dispatch for ServiceConsumer **Oracle_Service_Consumer** and ServiceConsumerService **List_Facilities**


Headers

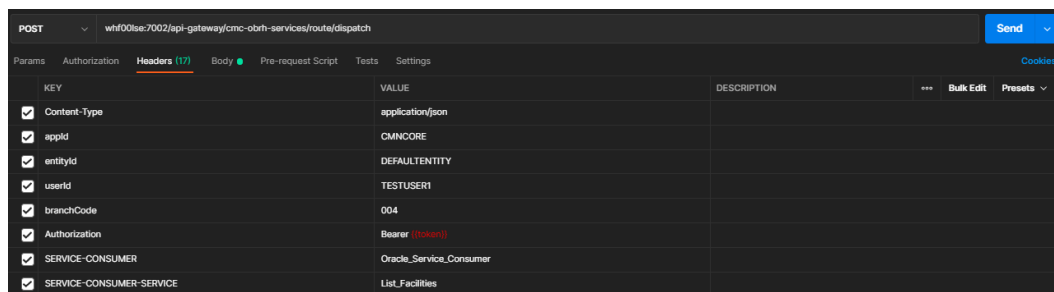

Request Payload

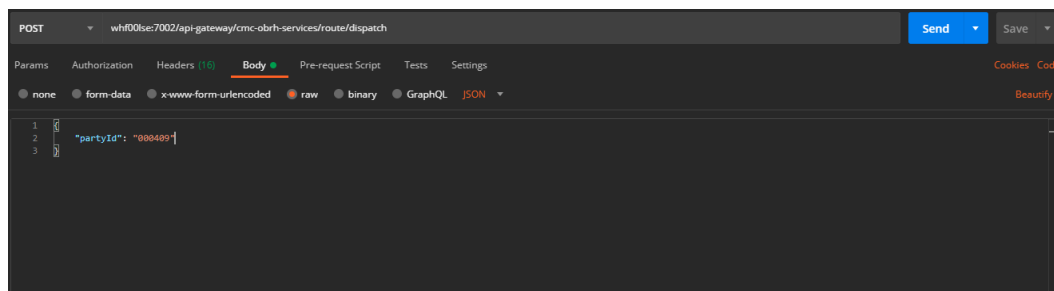

Response Payload on Successful Dispatch

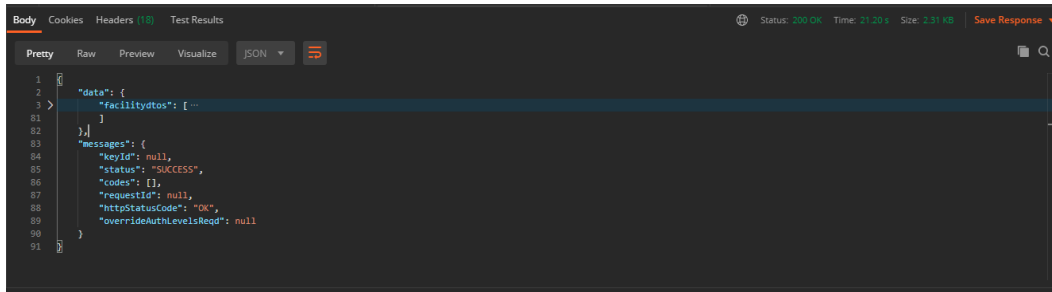


```

1  {
2    "data": {
3      "FacilityId": "..."
4    }
5  },
6  "messages": {
7    "keyId": null,
8    "status": "SUCCESS",
9    "codes": [],
10   "requestId": null,
11   "httpStatusCode": "OK",
12   "overrideAuthLevelsReqd": null
13 }

```

Response Payload on Failed Dispatch

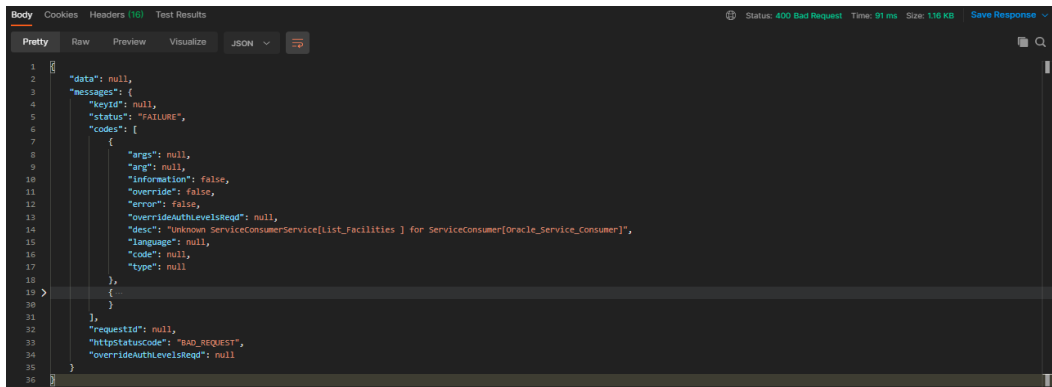

```

1  {
2    "data": null,
3    "messages": {
4      "keyId": null,
5      "status": "FAILURE",
6      "codes": [
7        {
8          "args": null,
9          "arg": null,
10         "information": false,
11         "override": false,
12         "error": false,
13         "overrideAuthLevelsReqd": null,
14         "desc": "Unknown ServiceConsumerService[list_Facilities ] for ServiceConsumer[Oracle_Service_Consumer]",
15         "language": null,
16         "code": null,
17         "type": null
18       }
19     ]
20   },
21   "requestId": null,
22   "httpStatusCode": "BAD_REQUEST",
23   "overrideAuthLevelsReqd": null
24 }

```

19.3 Asynchronous Dispatch API Specification

Dispatch endpoint is the **single** entry-point for invoking the routes configured in Oracle Banking Routing Hub for services of a Service Consumer.

Dispatch endpoint signature -


- Path : /route/dispatch
- Query Params:
 - isAsync : true
- Headers:
 - appId : CMNCORE
 - entityId : DEFAULTENTITY
 - userId : <user id>
 - branchCode : <branch code>
 - Authorization : Bearer <Token>
 - SERVICE-CONSUMER : <name of service consumer>

- SERVICE-CONSUMER-SERVICE : <name of service consumer service>
- Request Body:
 - Any valid JSON/XML payload which shall act as input to the transformation template in request transformer.
- Response Body:



```
{
  "data": { "correlationId" : "" },
  "messages": {}
}
```

Example - Below are the screenshots of route dispatch for ServiceConsumer **Oracle_Service_Consumer** and ServiceConsumerService **List_Facilities**


Query Params

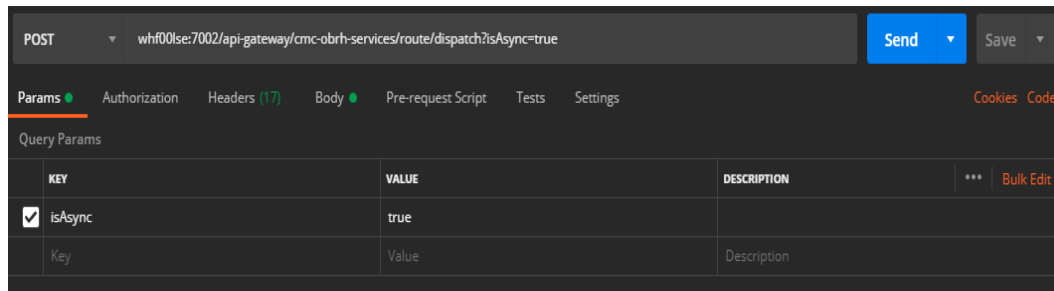

Headers

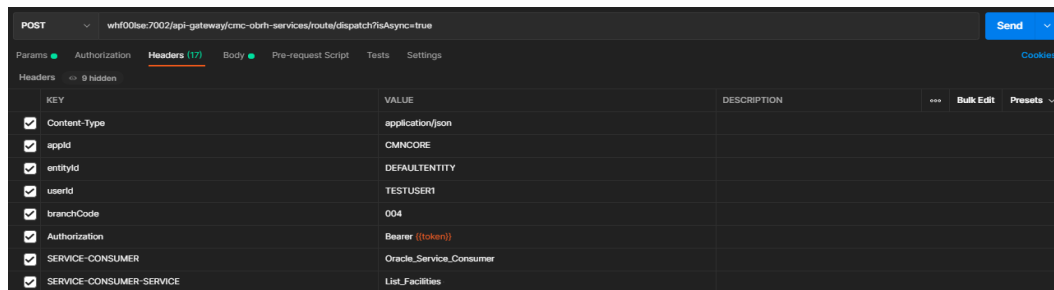

Request Payload

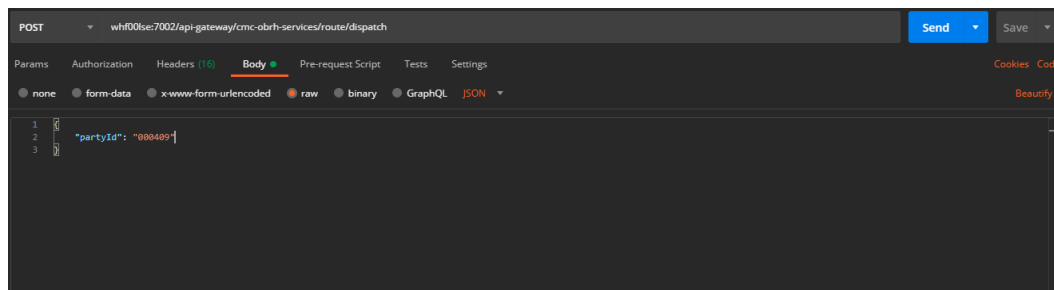

Response Payload

```

1  {
2    "data": {
3      "correlationId": "UZUVPk3LvkkCUaduX2xzU1iH9RCFMFDPLTPyIua999AlqgHTJXXPAD44tvQ9ktkv8rVpr7UmKj7S1Pr2gov2R85"
4    },
5    "messages": {
6      "keyId": null,
7      "status": "SUCCESS",
8      "codes": [
9        {
10         "args": null,
11         "arg": null,
12         "information": true,
13         "override": false,
14         "error": false,
15         "overrideAuthLevelsReqd": null,
16         "desc": "Request is being processed",
17         "type": "I",
18         "code": "CMC-088H-023",
19         "language": "ENG"
20       }
21     ],
22     "requestId": null,
23     "httpStatusCode": "OK",
24     "overrideAuthLevelsReqd": null
25   }
26 }

```

19.4 Asynchronous Dispatch Response API Specification

Response endpoint signature -

- Path : /route/dispatchResponse/{Correlation-Id}
 - Correlation-Id will be coming from the response of dispatch endpoint.
- Headers:
 - appId : CMNCORE
 - entityId : DEFAULTENTITY
 - userId : <user id>
 - branchCode : <branch code>
 - Authorization : Bearer <Token>
- Response Body:


```

{
  "data": {}
  "messages": {}
}

```


 - If the route invocation succeeds, data JSON member would contain the transformed (optional) response of the provided service. If it's a provided web service and no response transformation template is supplied, XML Soap Body of response would be converted into JSON object and sent in data JSON member.

- If the route invocation fails due to misconfigured route or connection time out to ServiceProviderImpl or some other reason, relevant error messages would be sent in messages JSON member. In that case, data JSON member would be null or empty.


Example - Below are the screenshots of route dispatch for

ServiceConsumer **Oracle_Service_Consumer** and ServiceConsumerService **List_Facilities**


Headers

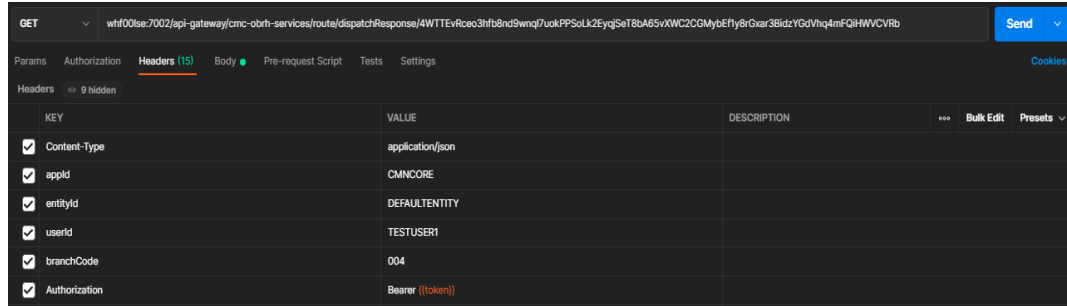


Response Payload when request is still processing

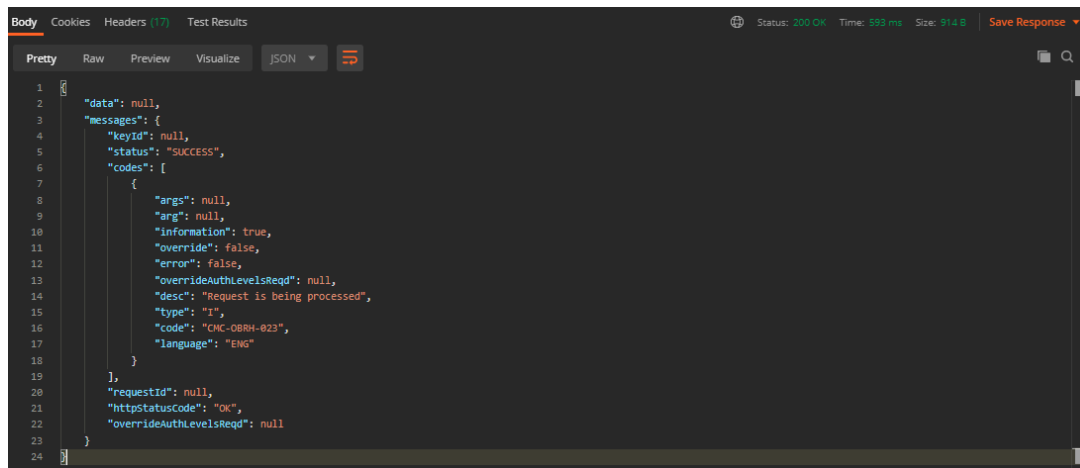

Response Payload when request is processed (on Successful Dispatch)

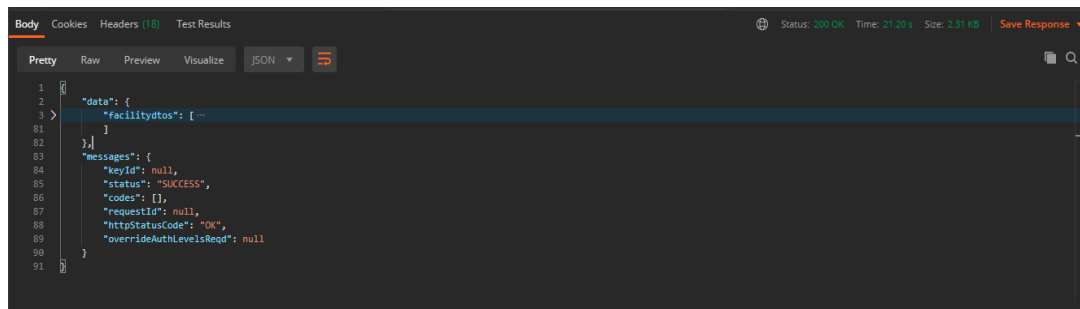

Response Payload when request is processed (on Failed Dispatch)

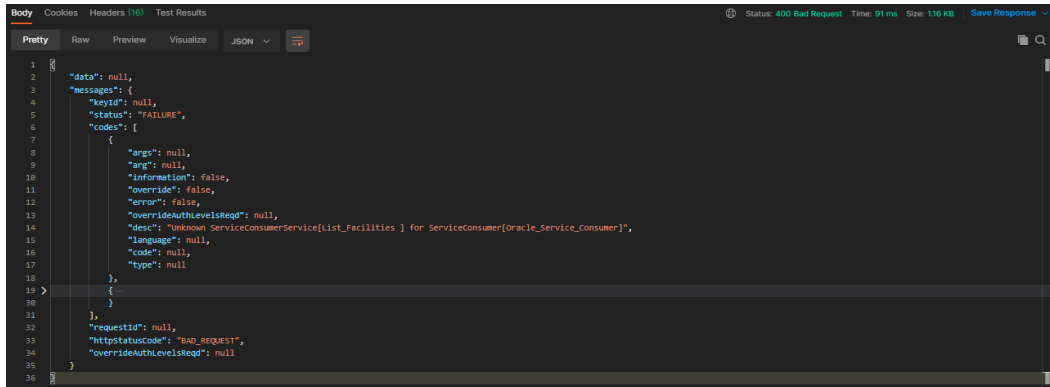

```

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26

```

```

{
  "data": null,
  "messages": {
    "keyid": null,
    "status": "FAILURE",
    "codes": [
      {
        "args": null,
        "arg": null,
        "information": false,
        "override": false,
        "error": false,
        "overrideAuthLevelReqd": null,
        "desc": "Unknown ServiceConsumerService[list_facilities ] for ServiceConsumer[Oracle_Service_Consumer]",
        "language": null,
        "code": null,
        "type": null
      }
    ]
  },
  "requestid": null,
  "httpStatusCode": "BAD_REQUEST",
  "overrideAuthLevelReqd": null
}

```

19.5 Template evaluation API Specification

Template evaluation endpoint will return the evaluated output of transformation template. End-user can validate the template based on the returned output.

Template evaluation endpoint signature -

- Method: POST
- Path : /template/evaluate
- Headers:
 - appld : CMNCORE
 - entityld : DEFAULTENTITY
 - userId : <user id>
 - branchCode : <branch code>
 - Authorization : Bearer <Token>
 - SERVICE-CONSUMER : <name of service consumer>
 - SERVICE-CONSUMER-SERVICE : <name of service consumer service>
 - SERVICE-TRANSFORMATION : <name of service transformation>
- Query Parameters:
 - transformationType : REQUEST / RESPONSE / MOCK_RESPONSE

Note: Default value is REQUEST if not specified
- Request Body:
 - Any valid JSON / XML payload which shall act as input to the transformation template in request transformer.

- Response Body:

```
{  
  "data": {}  
  "messages": {}  
}
```

20 Oracle Banking Routing Hub VM Arguments

Common Core Managed Server

Parameter	Default	Values
CMC-OB RH-SERVICE		
cmc-obrh-services.server.port		<SERVER_PORT>
obrh.db.jndi		<CMNCORE_JNDI>
cmc-obrh-services.oic.secretStore.url		<OIC_SECRET_STORE_URL>
cmc-obrh-services.audit.retention.days		<AUDIT_RETENTION_POLICY_DAYS>
cmc-obrh-services.audit.retention.archival		Y / N (Y for archiving and N for purging)
Enable and configure connection pooling for REST calls		
obrh.rest.connectionpool.enabled	false	true / false
obrh.rest.connectionpool.totalConnectionCount	20	<POOL_TOTAL_CONN_COUNT>
obrh.rest.connectionpool.maxConnectionCountPerRoute	2	<POOL_MAX_CONN_PER_ROUTE>
obrh.rest.connectionpool.timeToLive.ms	-1	<POOL_TTL>
Receive routing failure mail notification via plato-alerts-management-service		
obrh.alerts.enabled	false	true / false

Change approach for auditing		
obrh.audit.type	KAFKA	<p>DEFAULT / KAFKA / JMS / LOG / OFF</p> <p>For KAFKA option, cmc-obrh-kafka-consumer service needs to be deployed.</p> <p>For JMS option, cmc-obrh-jms-consumer service needs to be deployed.</p>
obrh.audit.type.log.event	NONE	<p>DISPATCH_REQUEST / DISPATCH_RESPONSE / ROUTE_INVOKE_START / ROUTE_INVOKE_FAILURE / TRANSFORMATION_TEMPLATE_EVALUATION_START / TRANSFORMATION_TEMPLATE_EVALUATION_END / TRANSFORMATION_EXTENDED_TEMPLATE_EVALUATION_START / TRANSFORMATION_EXTENDED_TEMPLATE_EVALUATION_END / PROVIDED_SERVICE_REQUEST / PROVIDED_SERVICE_RESPONSE</p> <p>This property is used to specify the events (comma-separated values) for which CLOB data needs to be logged and only considered if obrh.audit.type is LOG</p>
Overwrite the customization that is not part of configuration json		
obrh.import.overwrite	false	true / false
Use Custom Keystore and Truststore for HTTPS scheme		

obrh.keystore.password.encoded		true / false (true, if password is base 64 encoded)
obrh.truststore.path		<TRUSTSTORE_PATH>
obrh.truststore.password		<TRUSTSTORE_PASSWORD>
obrh.usekeystore		true / false (true, if keystore is required along with truststore)
obrh.keystore.path		<KEYSTORE_PATH>
obrh.keystore.password		<KEYSTORE_PASSWORD>
obrh.keystore.alias		<KEYSTORE_ALIAS_LIST>
obrh.keystore.aliaspassword		<KEYSTORE_ALIAS_PASSWORD_LIST>
obrh.ssl.protocol	TLS	TLS / TLSv1 / TLSv1.1 / TLSv1.2
For tomcat deployment		
obrh.server.isJavaEE	true	true / false (false for tomcat)
obrh.taskexecutor.corepoolsize	50	<CORE_POOLSIZE>
obrh.taskexecutor.maxpoolsize	50	<MAX_POOLSIZE>
obrh.taskexecutor.queuecapacity	100	<QUEUE_CAPACITY>
<p>Set Proxy settings for HTTPS</p> <p>As per the Java Networking documentation, HTTPS protocol handler will use the same as the http handler (i.e. http.nonProxyHosts).</p> <p>But in case of Weblogic, http.nonProxyHosts will not work for some reason.</p> <p>So, use https non proxy host argument (i.e. https.nonProxyHosts).</p>		

https.proxyHost		<PROXY_HOST_NAME>
https.proxyPort		<PROXY_PORT>
https.nonProxyHosts		<NON_PROXY_HOST_LIST>
http.nonProxyHosts		<NON_PROXY_HOST_LIST>
Set logger level		
plato.service.logging.level		<LOG_LEVEL>
Support SSL based SOAP provider calls in weblogic environment This property will enforce WebLogic Server to use SUN SSL implementation (javax package) rather than the WebLogic one.		
UseSunHttpHandler		true
CMC-OB RH-KAFKA-CONSUMER		
cmc-obrh-kafka-consumer.server.port		<SERVER_PORT>
Change ID generator		
obrh.audit.id-generator	UUID	UUID / SNOWFLAKE
CMC-OB RH-JMS-CONSUMER		
cmc-obrh-jms-consumer.server.port		<SERVER_PORT>
cmc-obrh-jms-consumer.connectionFactory		<JMS_CONN_FACTORY_JNDI>
cmc-obrh-jms-consumer.queue		<JMS_CONN_QUEUE_JNDI>
Change ID generator		
obrh.audit.id-generator	UUID	UUID / SNOWFLAKE

Plato Core Managed Server

Oracle Banking Routing Hub is using Multipart for Import feature.

By default, spring supports max 1MB file size and 10MB request size for Multipart.

In order to import bigger files,

plato-api-gateway.multipart.max-file-size=<MAX_FILE_SIZE> (default is 200MB)

plato-api-gateway.multipart.max-request-size=<MAX_REQUEST_SIZE> (default is 200MB)

NOTE: -1 for no size constraint

Example:

plato-api-gateway.multipart.max-file-size=-1

plato-api-gateway.multipart.max-request-size=-1

21 Functional Activity Codes

This topic describes about the Functional Activity Codes.

Screen Name	Functional Activity Codes	Action	Description
Routing Hub	CMC_FA_RH_APPLICATION	VIEW	Service Consumers UI in Routing Hub
-	CMC_FA_RH_AUDIT_LOG	CREATE	Log audit information in Routing Hub
-	CMC_FA_RH_AUDIT_SUMMARY	GET	Audit Summary
-	CMC_FA_RH_AUDIT_SUMMARY_DATA	GET	Audit Summary Data
-	CMC_FA_RH_CLEAR_SOAP_CLIENT_CACHE	CLEAR	Clears Soap Client Cache in Routing Hub
-	CMC_FA_RH_CONFIG	VIEW	Configuration UI in Routing Hub
-	CMC_FA_RH_CONFIG_CREATE	CREATE	Create Configuration in Routing Hub Maintenance
-	CMC_FA_RH_CONFIG_DELETE	DELETE	Delete Configuration in Routing Hub Maintenance
-	CMC_FA_RH_CONFIG_GET	GET	Fetch Configuration in Routing Hub Maintenance
-	CMC_FA_RH_CONFIG_MODIFY	MODIFY	Update Configuration in Routing Hub Maintenance
-	CMC_FA_RH_CONSUMER_QUEUE_CREATE	CREATE	Saves New Consumer Queue Mapping
-	CMC_FA_RH_CONSUMER_QUEUE_DELETE	DELETE	Deletes Specific Consumer Queue Mapping
-	CMC_FA_RH_CONSUMER_QUEUE_GETALL	GET	Fetches All Consumer Queue Mappings
-	CMC_FA_RH_CONSUMER_QUEUE_GETBYID	GET	Fetches Specific Consumer Queue Mapping
-	CMC_FA_RH_CONSUMER_QUEUE_MODIFY	MODIFY	Modifies Specific Consumer Queue Mapping
-	CMC_FA_RH_DASHBOARD	VIEW	Monitoring Dashboard UI
-	CMC_FA_RH_SERVICECONSUMER_SERVICEROUTING_CREATE	CREATE	Create Route in Routing Hub Maintenance
-	CMC_FA_RH_SERVICECONSUMER_SERVICEROUTING_DELETE	DELETE	Delete Route in Routing Hub Maintenance
-	CMC_FA_RH_SERVICECONSUMER_SERVICEROUTING_GETALL	GET	Fetch All Routes in Routing Hub Maintenance
-	CMC_FA_RH_SERVICECONSUMER_SERVICEROUTING_GETBYID	GET	Fetch Route in Routing Hub Maintenance
-	CMC_FA_RH_SERVICECONSUMER_SERVICEROUTING_MODIFY	MODIFY	Update Route in Routing Hub Maintenance
-	CMC_FA_RH_SERVICECONSUMER_SERVICEROUTING_CREATE	CREATE	Create Transformation in Routing Hub Maintenance

Screen Name	Functional Activity Codes	Action	Description
-	CMC_FA_RH_SERVIC ECONSUMER_SERVIC ETRANSFORMATION_DELETE	DELETE	Delete Transformation in Routing Hub Maintenance
-	CMC_FA_RH_SERVIC ECONSUMER_SERVIC ETRANSFORMATION_EXPORT	EXPORT	Export Transformation in Routing Hub Maintenance
-	CMC_FA_RH_SERVIC ECONSUMER_SERVIC ETRANSFORMATION_GETALL	GET	Fetch All Transformations in Routing Hub Maintenance
-	CMC_FA_RH_SERVIC ECONSUMER_SERVIC ETRANSFORMATION_GETBYID	GET	Fetch Transformation in Routing Hub Maintenance
-	CMC_FA_RH_SERVIC ECONSUMER_SERVIC ETRANSFORMATION_IMPORT	IMPORT	Import Transformation in Routing Hub Maintenance
-	CMC_FA_RH_SERVIC ECONSUMER_SERVIC ETRANSFORMATION_MODIFY	MODIFY	Update Transformation in Routing Hub Maintenance
-	CMC_FA_RH_SERVIC ECONSUMER_SERVIC E_CREATE	CREATE	Create Service in Routing Hub Maintenance
-	CMC_FA_RH_SERVIC ECONSUMER_SERVIC E_DELETE	DELETE	Delete Service in Routing Hub Maintenance
-	CMC_FA_RH_SERVIC ECONSUMER_SERVIC E_EXPORT	EXPORT	Export Service in Routing Hub Maintenance
-	CMC_FA_RH_SERVIC ECONSUMER_SERVIC E_GETALL	GET	Fetch All Services in Routing Hub Maintenance
-	CMC_FA_RH_SERVIC ECONSUMER_SERVIC E_GETBYID	GET	Fetch Service in Routing Hub Maintenance
-	CMC_FA_RH_SERVIC ECONSUMER_SERVIC E_IMPORT	IMPORT	Import Service in Routing Hub Maintenance
-	CMC_FA_RH_SERVIC ECONSUMER_SERVIC E_MODIFY	MODIFY	Update Service in Routing Hub Maintenance
-	CMC_FA_RH_SERVIC EPROVIDER_CREATE	CREATE	Create Provider in Routing Hub Maintenance
-	CMC_FA_RH_SERVIC EPROVIDER_DELETE	DELETE	Delete Provider in Routing Hub Maintenance
-	CMC_FA_RH_SERVIC EPROVIDER_EXPORT	EXPORT	Export Provider in Routing Hub Maintenance
-	CMC_FA_RH_SERVIC EPROVIDER_GENERA TEREQUEST	GET	Extract Provider Service Request Definition in Routing Hub Maintenance
-	CMC_FA_RH_SERVIC EPROVIDER_GETALL	GET	Fetch All Providers in Routing Hub Maintenance
-	CMC_FA_RH_SERVIC EPROVIDER_GETBYID	GET	Fetch Provider in Routing Hub Maintenance

Screen Name	Functional Activity Codes	Action	Description
-	CMC_FA_RH_SERVIC EPROVIDER_IMPL_CR EATE	CREATE	Create Implementation in Routing Hub Maintenance
-	CMC_FA_RH_SERVIC EPROVIDER_IMPL_DE LETE	DELETE	Delete Implementation in Routing Hub Maintenance
-	CMC_FA_RH_SERVIC EPROVIDER_IMPL_EX PORT	EXPORT	Export Implementation in Routing Hub Maintenance
-	CMC_FA_RH_SERVIC EPROVIDER_IMPL_GE NERATEREQUEST	GET	Extract Implementation Service Request Definition in Routing Hub Maintenance