

Open Development Tool Installation
Oracle FLEXCUBE Investor Servicing
Release 14.7.6.0.0
Part No. G13798-01
[October] [2024]



Table of Contents

- 1. OPEN DEVELOPMENT TOOL INSTALLATION 1-1
 - 1.1 INTRODUCTION 1-1
 - 1.2 INSTALLING OPEN DEVELOPMENT TOOL 1-1
- 2. SETTING UP DATABASE FOR OPEN DEVELOPMENT TOOL..... 2-1
- 3. OPEN DEVELOPMENT TOOL (ODT) APPLICATION FULL DEPLOYMENT..... 3-10

1. Open Development Tool Installation


1.1 Introduction

This document explains about the creation of .war file using ODT (Open Development Tool) and setting up database for ODT installation.

1.2 Installing Open Development Tool

To install ODT, follow the steps given below:

1. Run 'FCUBSInstaller.bat' batch file to launch Oracle FLEXCUBE Investor Servicing Installer.
2. Click 'Next'. The following screen is displayed.

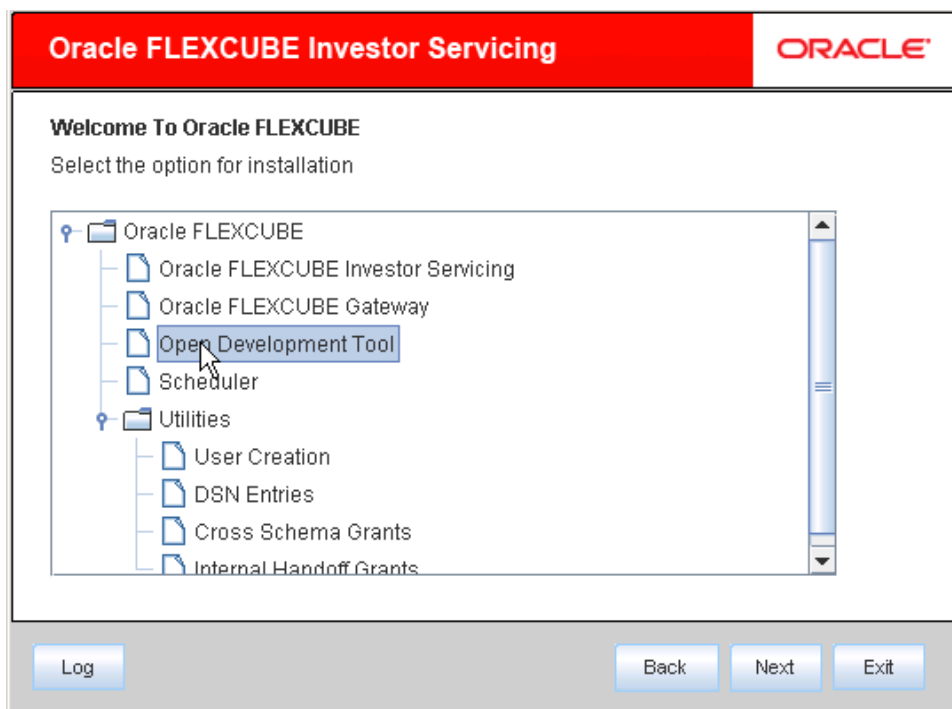

3. Click 'Open Development Tool'.
4. Click 'Next'. The following screen is displayed.

Oracle FLEXCUBE Investor Servicing ORACLE

Welcome To Oracle FLEXCUBE
Choose Oracle FLEXCUBE Component for installation.

Build Application
Database
Deploy Application

Operating System Linux ▼
Application Server Weblogic ▼
DataBase Server Oracle ▼

Log Back Next Exit

5. Select 'Build Application' as Oracle FLEXCUBE component for installation.
6. Specify the following details.

Operating System

Specify the operating system in which you are installing Oracle FLEXCUBE.

Application Server

Specify the application server on which you are installing Oracle FLEXCUBE.

Database Server

Specify the database server on which you are installing Oracle FLEXCUBE.

7. Click 'Next'. The following screen is displayed.

Oracle FLEXCUBE Investor Servicing

ORACLE®

Installation Type

FC Home



Log

Back

Next

Exit

8. Specify the source directory. You can use the directory icon to browse to the directory location. The directory must contain FCHome. If the required folders are not present, then the error message is displayed.
9. Click 'Next'. The following screen is displayed:

Oracle FLEXCUBE Investor Servicing

ORACLE®

Valid Patch List

No	Version	Type	Select
1	12.4.0.0.0	CONSOLE	☒

Log

Back

Next

Exit

10. Select the Console type and click Next. The following screen is displayed:

Oracle FLEXCUBE Investor Servicing **ORACLE**

Build Process
Current screen provides an option to enter application jndi names and logger path

ODT JNDI

Logger Path

PROVIDER_URL

11. Specify the following details.

ODT JNDI

Specify the JNDI for the ODT.

Logger Path

Specify the path where the logs have to be written.

Provider_URL

Specify the provider URL.

12. Click 'Next'. The following screen is displayed.

Oracle FLEXCUBE Investor Servicing
ORACLE

Property File Creation

Current screen provides an option for Enabling Single Sign on

SSO Required ☐

SSO KEY

SSO Type

SSO Sign Off Required ☐

Authentication details maintained external to FLEXCUBE

External Password Required ☐ Authentication Type

External User Login Required ☐

Single sign-on (SSO) is a property of access control of multiple related, but independent software systems. With this property a user logs in once and gains access to all systems without being prompted to log in again at each of them.

Log Back Next Exit

13. Here we set single sign on properties. Click 'Next'.

This is an external authentication window. If external authentication is not required, then uncheck all the options and click 'Next'. The following screen is displayed:

Oracle FLEXCUBE Investor Servicing
ORACLE

Property File Creation

Choose Enable SSL option for Securing confidential user information

☒ SSL Enabled?

☒ Platform Security

SMS Security Key

If the SSL Enabled option is unchecked then this setting will put your application at risk. OFSS will not hold any responsibility for the Data Loss.

Log Back Next Exit

SSL Enabled

Indicate whether SSL is enabled or not. If SSL is required, choose 'Yes'. If SSL is not enabled, the Installer will pop-up a window.




However, it is recommended that you enable SSL.

Platform Security

Platform Security is available only for weblogic.

If Platform Security is not enabled, the Installer will pop-up a window.

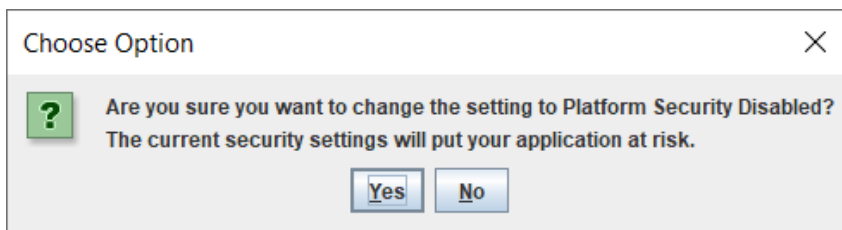


IF Platform Security is checked for weblogic the symmetric key is not stored in the property file for security reasons. If Platform Security is unchecked the symmetric key is available in the property file and a warning message is displayed to the user.

SMS Security Key

Specify the security key for the Encryption, here in this case it is 'oraclefinancials'.

14. Click 'Next'. You will be navigated to the next screen

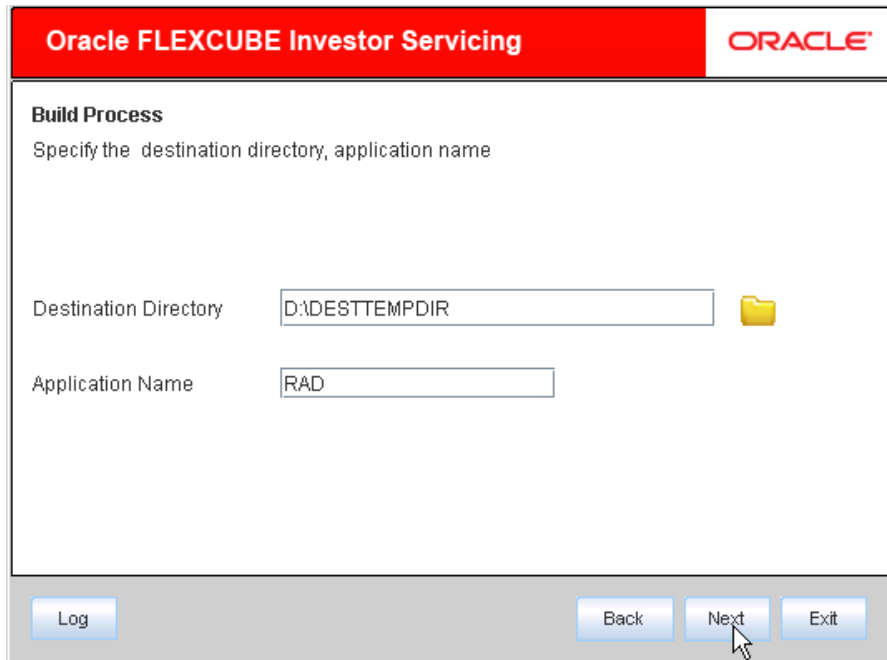

The screenshot shows the 'Build Process' window in Oracle FLEXCUBE Investor Servicing. The window has a red header bar with the text 'Oracle FLEXCUBE Investor Servicing' and the 'ORACLE' logo. Below the header, the title 'Build Process' is displayed, followed by the instruction 'Specify the destination directory, application name'. There are two input fields: 'Destination Directory' with the value 'D:\DESTTEMPDIR' and a folder icon to its right, and 'Application Name' with the value 'RAD'. At the bottom of the window, there is a 'Log' button on the left and 'Back', 'Next', and 'Exit' buttons on the right. A mouse cursor is pointing at the 'Next' button.


Destination Directory

Specify the destination directory. You can use the directory icon to browse to the source directory location.

Application Name

Specify the desired name for the application. For example,,: RAD.


Click 'Next. The following screen is displayed.

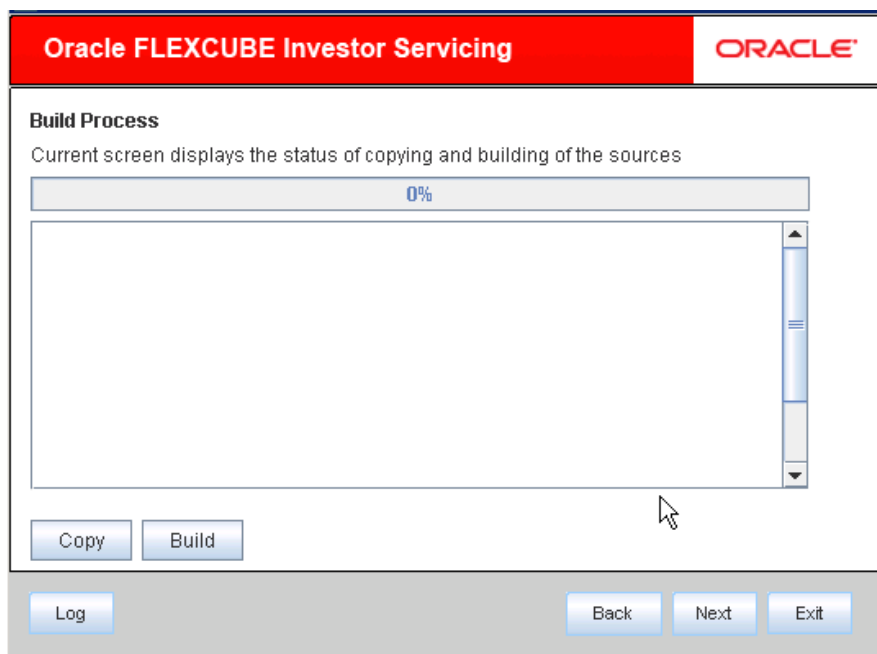


The screenshot shows the 'Build Process' window in Oracle FLEXCUBE Investor Servicing, displaying the progress of copying and building sources. The window has a red header bar with the text 'Oracle FLEXCUBE Investor Servicing' and the 'ORACLE' logo. Below the header, the title 'Build Process' is displayed, followed by the instruction 'Current screen displays the status of copying and building of the sources'. A progress bar shows '0%'. Below the progress bar is a large empty rectangular area with a vertical scrollbar on the right. At the bottom of the window, there are 'Copy' and 'Build' buttons on the left, and 'Log', 'Back', 'Next', and 'Exit' buttons on the right. A mouse cursor is pointing at the 'Next' button.

You can select all the source directories in this screen. The Installer will copy the sources from the multiple locations into the destination directory. You can have consolidated sources in the destination directory.

15. Click 'Copy' button to copy sources to the destination location. The following screen is displayed:

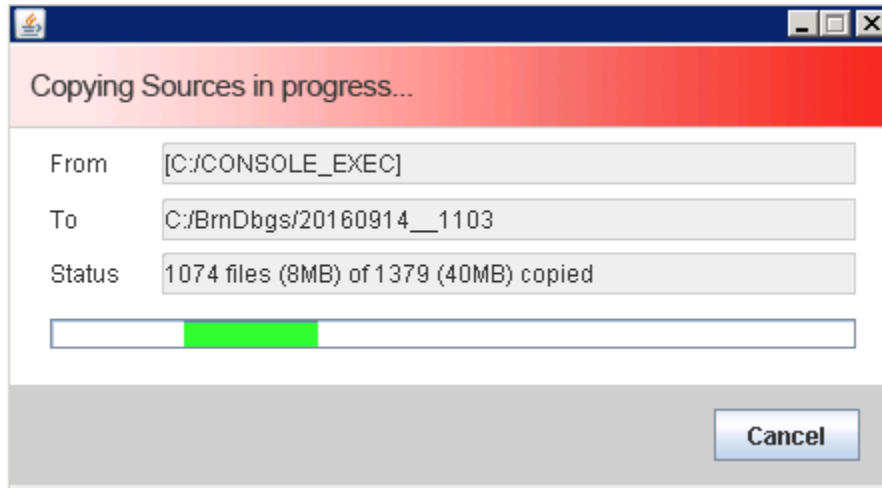


Once the copying process is done, the following screen is displayed:

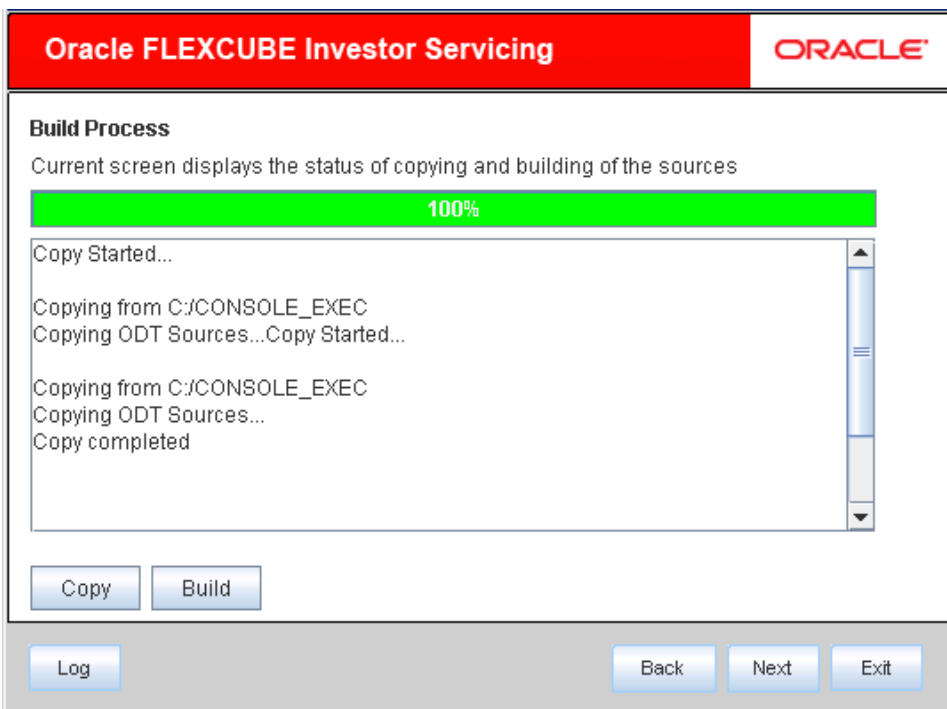


16. Click 'Build' button to build the war file in the destination location.

The system displays the following screen when the copying is complete.

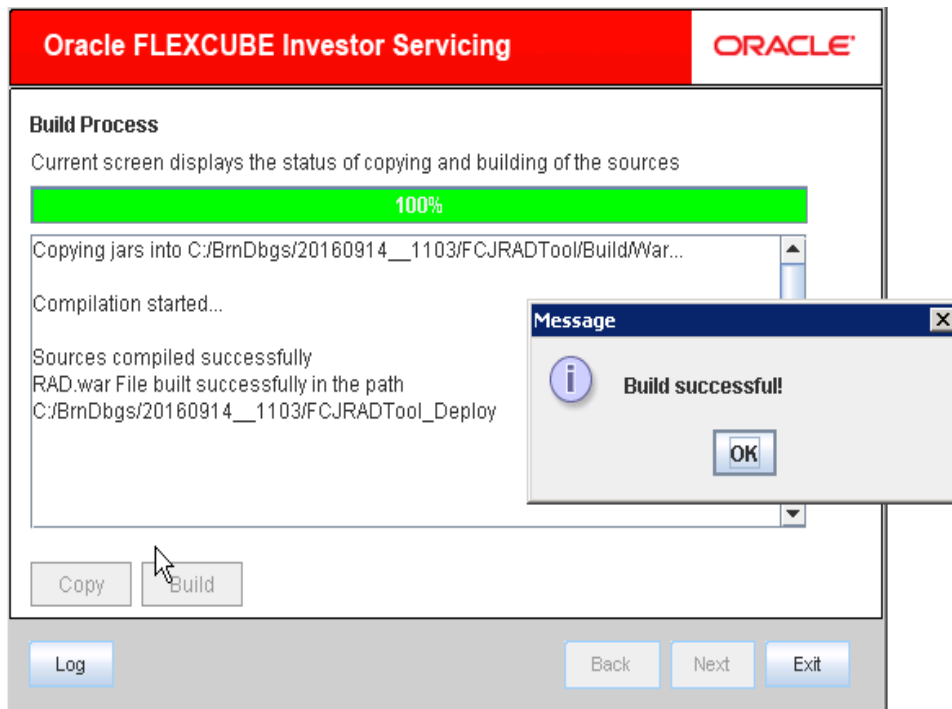


Click OK. The following screen is displayed:

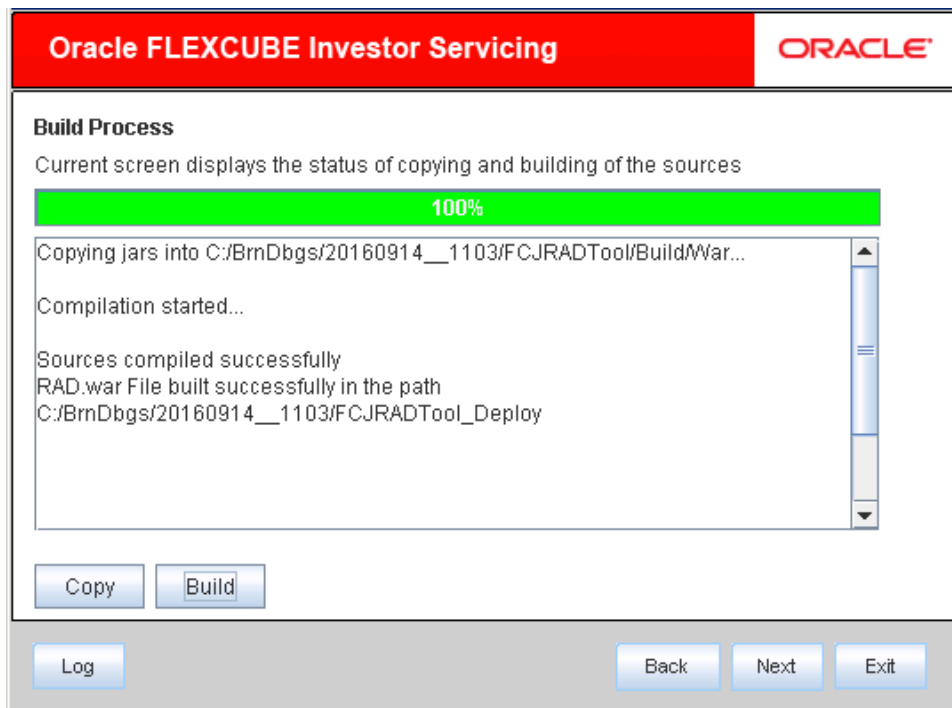

2. Setting up Database for Open Development Tool

To set up database for Open Development Tool (ODT), follow the steps given below:

1. Run 'FCUBSInstaller.bat' batch file to launch Oracle FLEXCUBE Investor Servicing Installer.
2. Click 'Next', the following screen will be displayed.

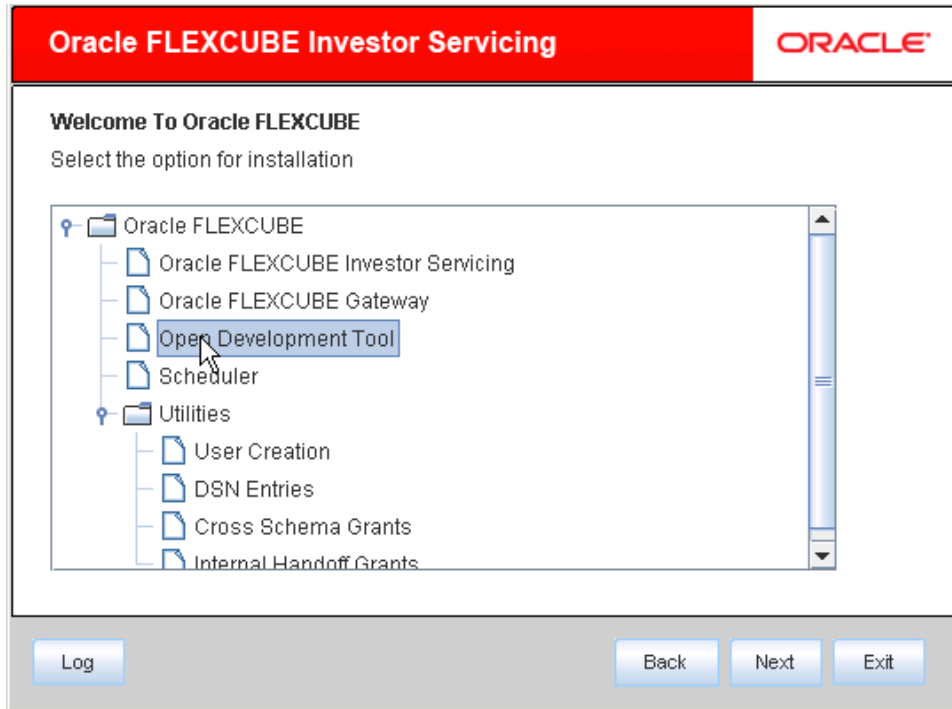

3. Click 'Open Development Tool'.

- Click 'Next'. The following screen is displayed.

Oracle FLEXCUBE Investor Servicing ORACLE

Welcome To Oracle FLEXCUBE
Choose Oracle FLEXCUBE Component for installation.

Build Application
Database
Deploy Application

Operating System: Linux
Application Server: Weblogic
DataBase Server: Oracle

Log Back Next Exit

- Select 'Database' as Oracle FLEXCUBE component for installation.
- Specify the following details.


Operating System

Specify the operating system in which you are installing Oracle FLEXCUBE.

Database Server


Specify the database server on which you are installing Oracle FLEXCUBE.

7. Click 'Next'. The following screen is displayed.

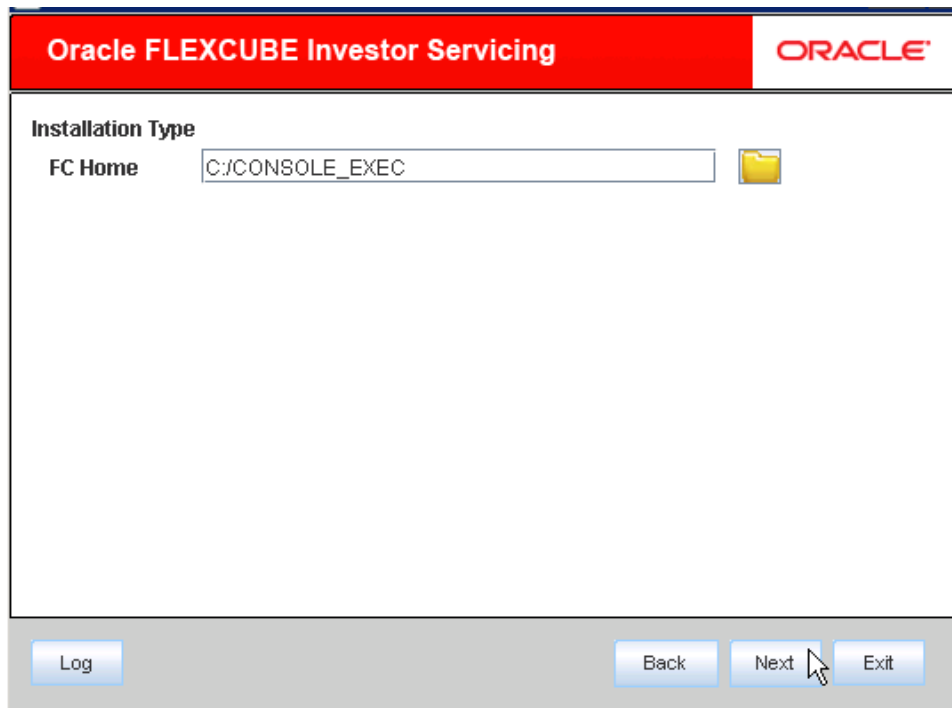

The screenshot shows the 'Installation Type' screen of the Oracle FLEXCUBE Investor Servicing application. The title bar is red with 'Oracle FLEXCUBE Investor Servicing' and the 'ORACLE' logo. The main area is titled 'Installation Type' and contains a label 'FC Home' followed by a text input field containing 'C:\CONSOLE_EXEC' and a folder icon button. At the bottom, there is a grey bar with four buttons: 'Log', 'Back', 'Next' (with a mouse cursor over it), and 'Exit'.

Browse for Console_EXEC folder and click 'Next'. The following screen is displayed:

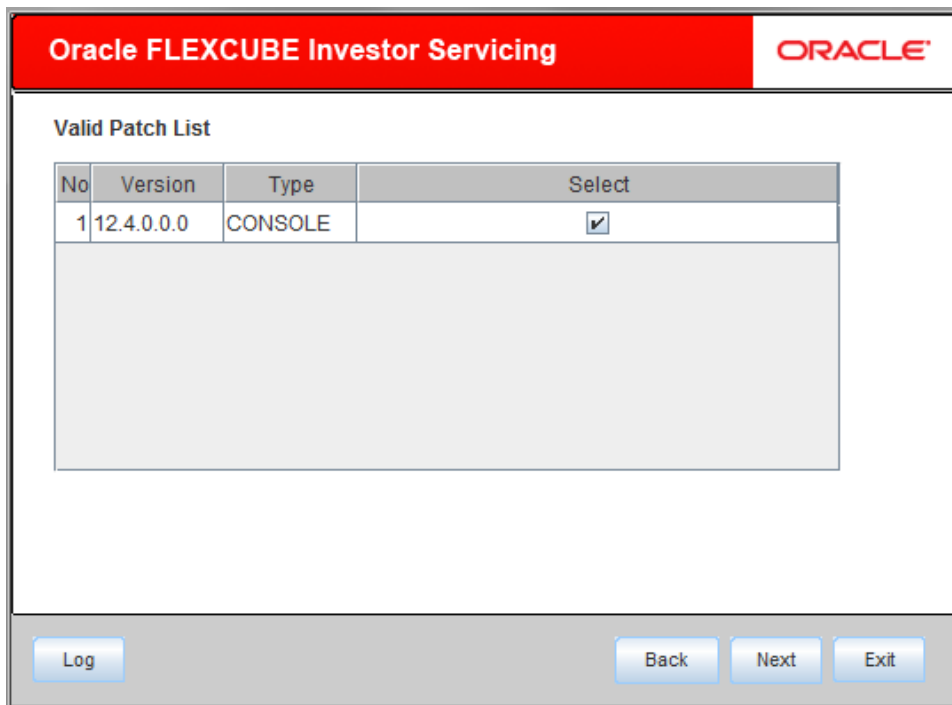


The screenshot shows the 'Valid Patch List' screen of the Oracle FLEXCUBE Investor Servicing application. The title bar is red with 'Oracle FLEXCUBE Investor Servicing' and the 'ORACLE' logo. The main area is titled 'Valid Patch List' and contains a table with the following data:

No	Version	Type	Select
1	12.4.0.0.0	CONSOLE	☒

Below the table is a large empty rectangular area. At the bottom, there is a grey bar with four buttons: 'Log', 'Back', 'Next', and 'Exit'.

Select the console type and select 'Next'. The following screen is displayed:

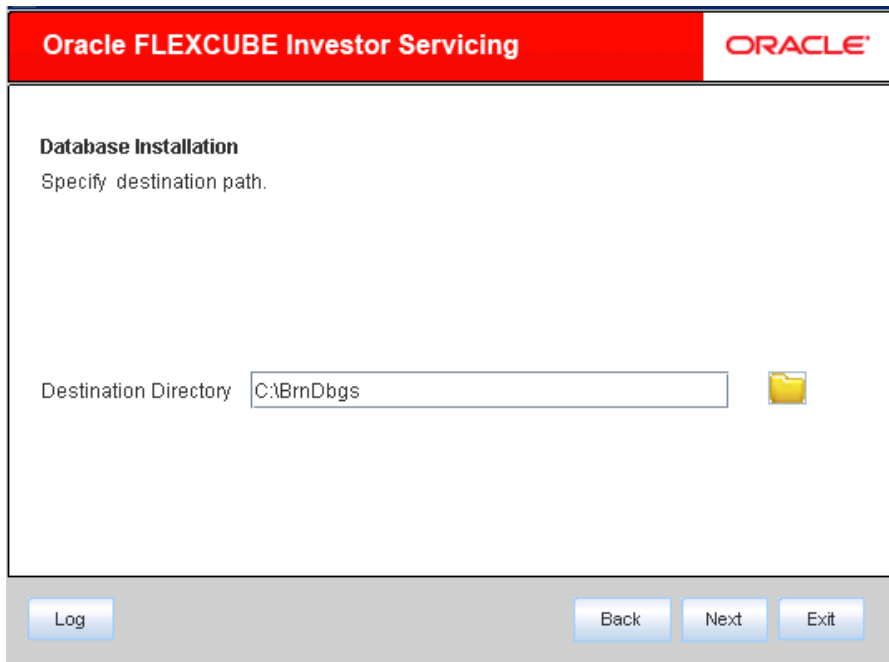

Oracle FLEXCUBE Investor Servicing ORACLE

Database Installation
Specify destination path.


Destination Directory C:\BrnDbgs

Log Back Next Exit

Destination Directory

Specify the destination directory. You can use the directory icon to browse to the source directory location.

The following screen is displayed:

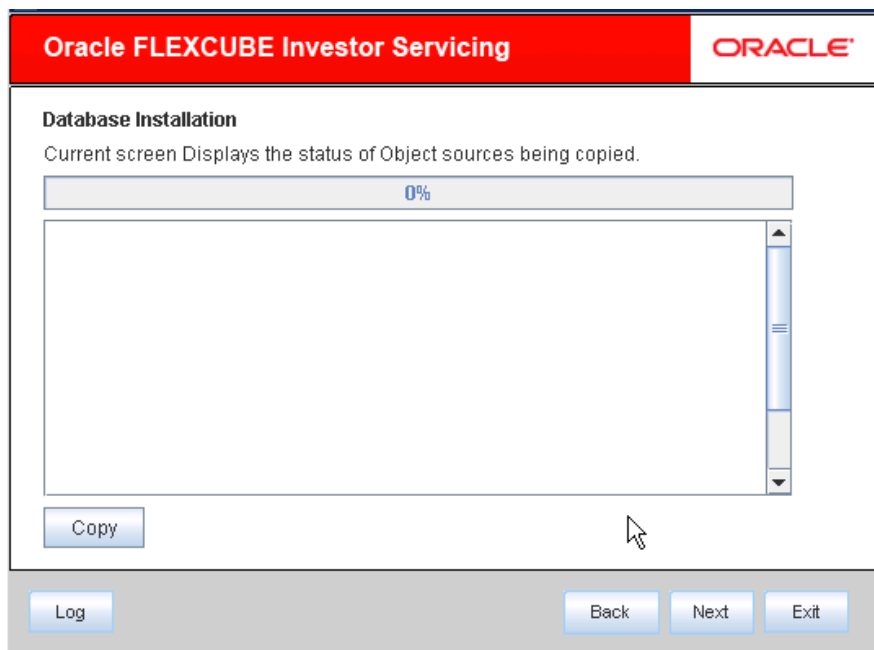

Oracle FLEXCUBE Investor Servicing ORACLE


Database Installation
Current screen Displays the status of Object sources being copied.

0%

Copy

Log Back Next Exit

Click 'Copy'. The following screen is displayed:

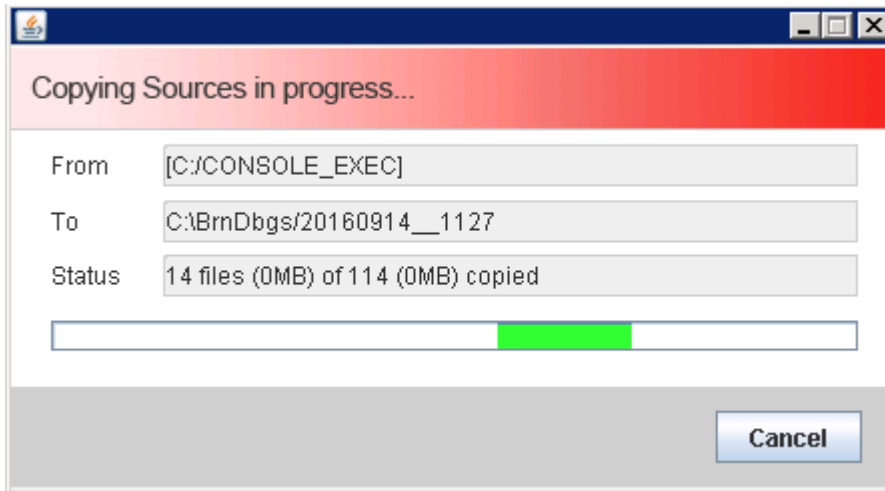

Click 'Copy' to copy the source from source directory to the destination directory. Once the source is copied, the following screen is displayed.

Oracle FLEXCUBE Investor Servicing ORACLE

Database Installation
Provide schema details.

Name	Value
Username	installer
Password	
Service Name	testdb
IP Address	10.10.10.10
Port	1521
TNS Connect Descriptor	testdb.world

Test Connection

Log Back Next Exit

8. Specify the following schema details:

User Name

Specify the user name to access the schema.

Password

Specify the schema password for the above user name.

Service Name

Specify service name of database.

IP Address

Specify the IP address of the system where the database schema is installed.


Port

Specify the port number.

TNS Connect Descriptor


Specify a valid connect string that contains the details for database connectivity.

9. Once you have specified the details, click 'Test Connection' button to test the database schema connection.

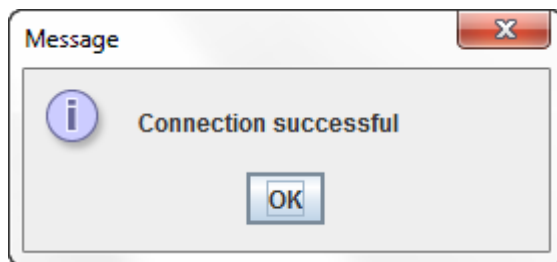


The above message is displayed if the connection is established successfully.


10. Click 'Next'. The following screen is displayed.

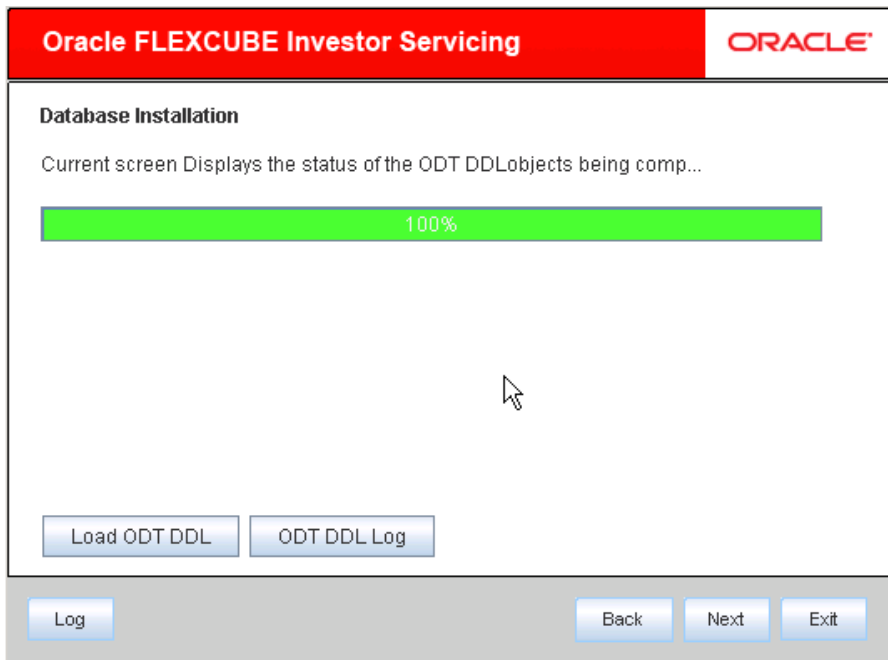

11. Click 'Load ODT DDL' button to start compiling. The objects 'Type', 'Table', and 'Sequence' will be compiled and the count will be updated. You can verify the DDL objects compilation by comparing the current count and the release count. The release count is the number of files in the temporary folder to which the files are copied.

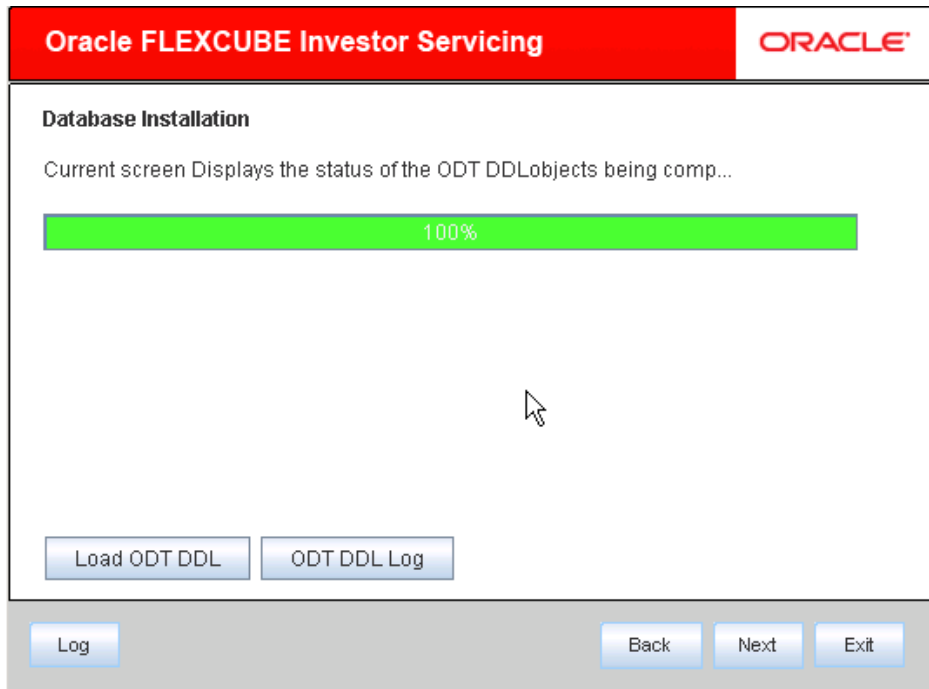

12. Click on ODT DDL log to see the log.
13. Click 'Next'. The following screen is displayed.

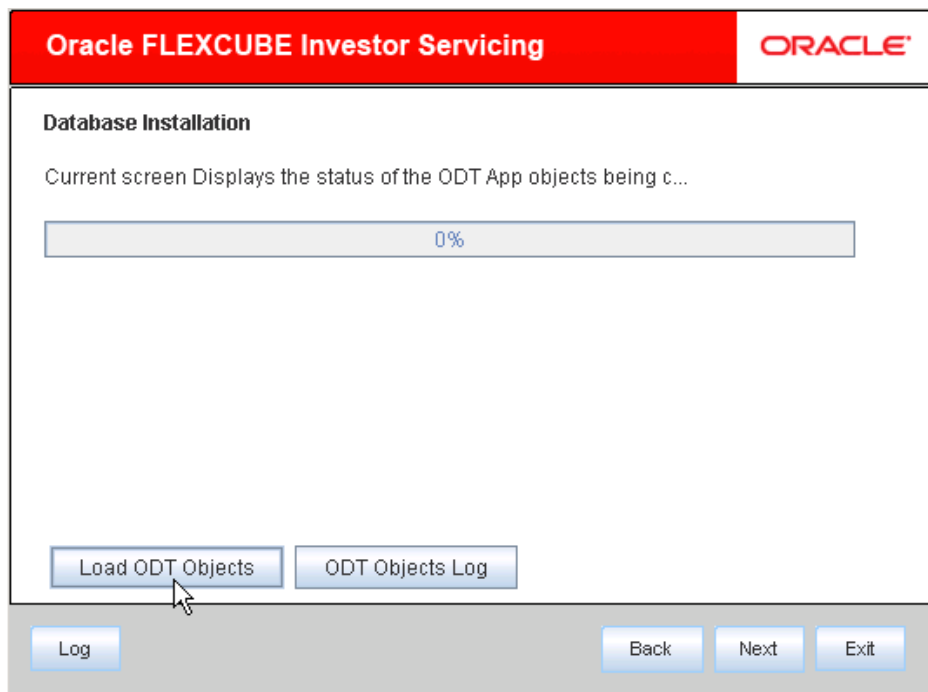

14. Click 'Load ODT Objects' button to compile APP objects.

The installer loads the functions, procedures, views, triggers and packages as per your selection and compiles them.



You can verify the application objects compilation by comparing the count shown in this screen with the release count.

15. Click 'ODT Objects Log' to view the log.

The log file 'LoadODTObj.log' will be available in the destination directory under the folder 'DBLogs'.

16. Click 'Next'. The following screen is displayed.

The screenshot shows the 'Database Installation' window of the Oracle FLEXCUBE Investor Servicing installer. It displays the current percentage of invalids in the database (0%) and a table with the following data:

Object Type	Invalid Count	Total Count
FUNCTION	0	0
PROCEDURE	0	4
VIEW	0	0
TRIGGER	0	0
PACKAGE	3	56
PACKAGE BODY	40	56

Below the table are buttons for 'Invalids List' and 'Recompile'. At the bottom of the window are buttons for 'Log', 'Back', 'Next' (with a mouse cursor), and 'Exit'.

17. Click 'Invalids List' button to view the count of invalid objects in the database.

You can view the file 'InvalidList.txt' created by the installer in the destination directory under the folder 'DBLogs'.

18. Click 'Recompile' to re-compile any invalid objects If present. This reduces the invalid object count.



The Installer allows 'Recompile' multiple times in order to reduce the invalid objects count.

The following screen is displayed on successful re-compilation of ODT Objects.

Oracle FLEXCUBE Investor Servicing

ORACLE®

Database Installation

Current screen Displays the number of invalids in the DB.

0%

Object Type	Invalid Count	Total Count
FUNCTION	0	0
PROCEDURE	0	4
VIEW	0	0
TRIGGER	0	0
PACKAGE	0	56
PACKAGE BODY	0	56

Invalids List

Recompile

Log

Back


Next

Exit

The database is set up for the ODT installation.

3. Open Development Tool (ODT) Application Full Deployment

1. Launch Oracle FLEXCUBE Investor Servicing Installer.
2. Click on 'Next' to display the screen below.

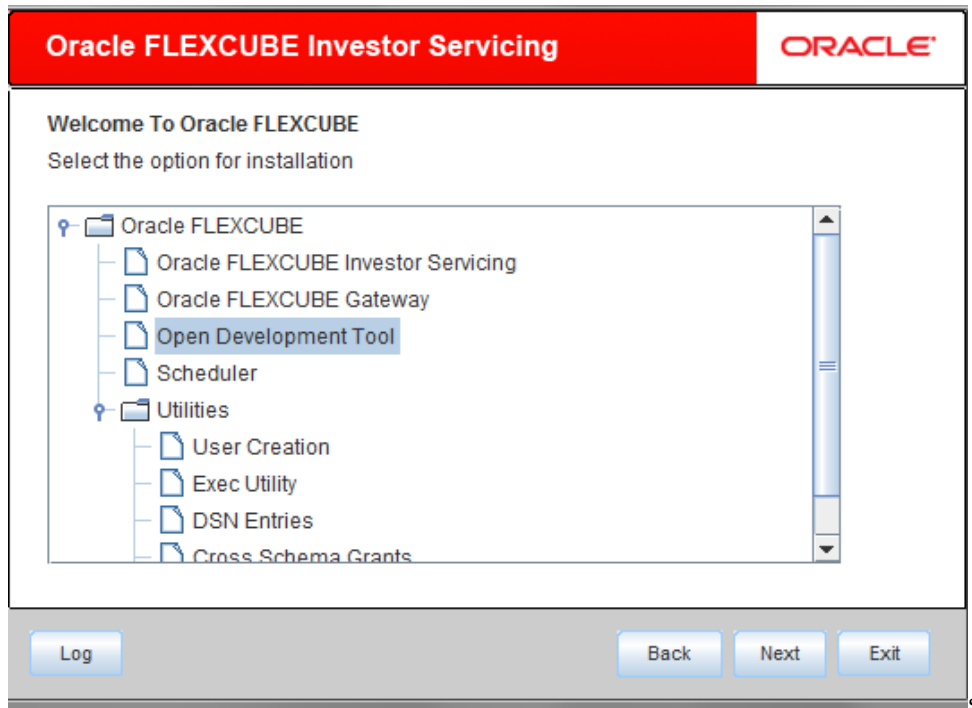

3. Select 'Open Development Tool'.
4. Click 'Next' to display the screen below.

Oracle FLEXCUBE Investor Servicing

ORACLE

Welcome To Oracle FLEXCUBE

Choose Oracle FLEXCUBE Component for installation.

Build Application
Database
Deploy Application

Operating System Linux

Application Server Weblogic

DataBase Server Oracle

Log Back Next Exit

5. Select 'Deploy Application'.

Operating System

Select the server's operating system in which you are installing the FCIS application. Select the appropriate one from the adjoining drop-down list.

Application Server

Select 'Weblogic' from the adjoining drop down list.

Database Server

Select the database server in which you are installing the FCIS application. Select the appropriate one from the adjoining drop-down list.

6. WeblogicClick 'Next' to display the screen below.

Oracle FLEXCUBE Investor Servicing

ORACLE®

Application Deployment

Provide server details for connecting to the server.

Name	Value
Admin IP	localhost
Admin Port	7001
Admin Username	weblogic
Server Admin Password	●●●●●●●●

Test Connection

Type of Deployment

Full Deployment

Log

Back

Next

Exit

7. Specify the following details:

Admin IP

By default it will displayed as local host.

Admin Port

Specify port number of weblogic server.

Admin UserName

Specify the appropriate admin username of the weblogic application server.


Server Admin Password

Specify the appropriate server admin password of the weblogic application server.

Type of Deployment

Select 'Full Deployment'.

8. Click 'Test Connection' to test the connection with the application server. On successful connection, the following message will be displayed.

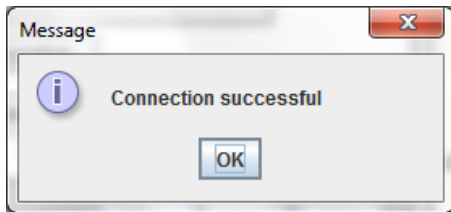

9. Click 'OK' and click 'Next' to display the screen below.

10. Specify the following details

EAR Path

Select the application EAR to be deployed using the browse button.

 The Application EAR path cannot be copied and pasted on to the text box, thereby demanding the use of the browse button to select the EAR.

Property File Path

If the property file is internal to the application EAR, it gets displayed here on selection of EAR path. If the property file is external, specify the location. You can use the directory button to browser and select the directory.

Application Name

Application name gets displayed on selection of EAR path.

Application Context

Application context gets displayed on selection of EAR path..


Manage Resources

Check this box if resources are to be created along with deployment.

Security Key for Encryption

Specify the security key for the Encryption, here in this case it is 'oraclefinancials'.

11. Click on 'Next' to display the screen below.

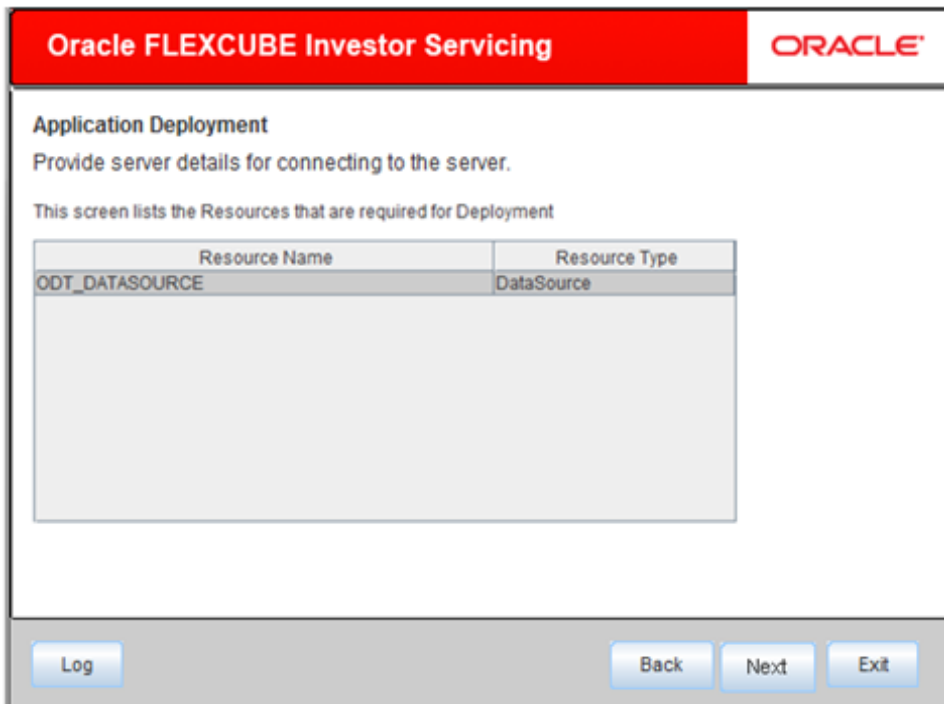

Resource Name	Resource Type
ODT_DATASOURCE	DataSource

The current screen shows a list and type of resources that are created.

12. Click 'Next'. The following screen will be displayed.

Oracle FLEXCUBE Investor Servicing
ORACLE

Application Deployment

Provide server details for connecting to the server.

Resource ID ODT_DATASOURCE

S.No.	Property Name	Property Value
1	DataSource Driver	oracle.jdbc.OracleDriver
2	DataSource Type	NXA
3	Schema UserName	abc
4	Schema PAssword	***
5	IP Address	10.184.86.27
6	Port Number	1522
7	Service Name	avast1
8	Initial Capacity	15

Test Connection
Save Changes
☐ Modify JDBC url

Log
Back
Next
Exit

13. Specify the following details

Resource ID

Select the data source needs to get created from the adjoining drop down list.

DataSource Driver

Specify the JDBC driver URL with which the connection is established.

Ex: oracle.jdbc.OracleDriver for Non-XA datasources

DataSource Type

Specify the type of datasource that is to be created, XA or Non-XA.

Schema Username

Specify the username of the schema to which the connection is established.

Schema Password

Specify the password of the schema.

IP Address

Specify to provide the host address of the schema.

Port Number

Specify the port number of schema.

Service Name

Specify the schema name.

Initial Capacity

The number of physical connections to create when creating the connection pool in the data source

Maximum Capacity

The maximum number of physical connections that this connection pool can contain.

Capacity Increment

The increment by which this JDBC connection pool's capacity is expanded.

Shrink Frequency

The number of seconds to wait before shrinking a connection pool that has incrementally increased to meet demand.

Connection Reserve Timeout

The number of seconds after which a call to reserve a connection from the connection pool will timeout.

14. Click 'Save Changes' to save the values provided In the table against corresponding value of Resource ID.
15. Click 'Test Connection' to try to establish connection with required details provided in the table.
16. Click on 'Next' to get the following screen.

Modify JDBC URL

17. Select 'Modify JDBC URL' for editing the generated URL.
18. If 'Modify JDBC URL' is selected, on click of 'Next' , the following screen will be displayed.

Oracle FLEXCUBE Investor Servicing
ORACLE

JDBC Url

JDBC url to get connected to the Application server

Resource ID

ODT_DATASOURCE

jdbc:oracle:thin:@10.184.86.152:1522:avast1

Test Connection

Save Changes

Log

Back

Next

Exit

19. Click 'Next', the following screen will be displayed.

Application Full Deployment
Specify Server environment details for deployment

Domain Name
Default_domain
Get Details

S.No.	Server Name	Deploy
1	AdminServer	☐
2	ManagedServer	☐
3	ClusterTest	☐
4	AVAST	☐

Log


Back

Next

Exit


20. The Domain Name shows the weblogic domains name.

21. Click 'Get Details', the list of available servers are displayed in the table. Atleast one server should be selected to proceed to next screen.
22. Click 'Next' to display the screen below.

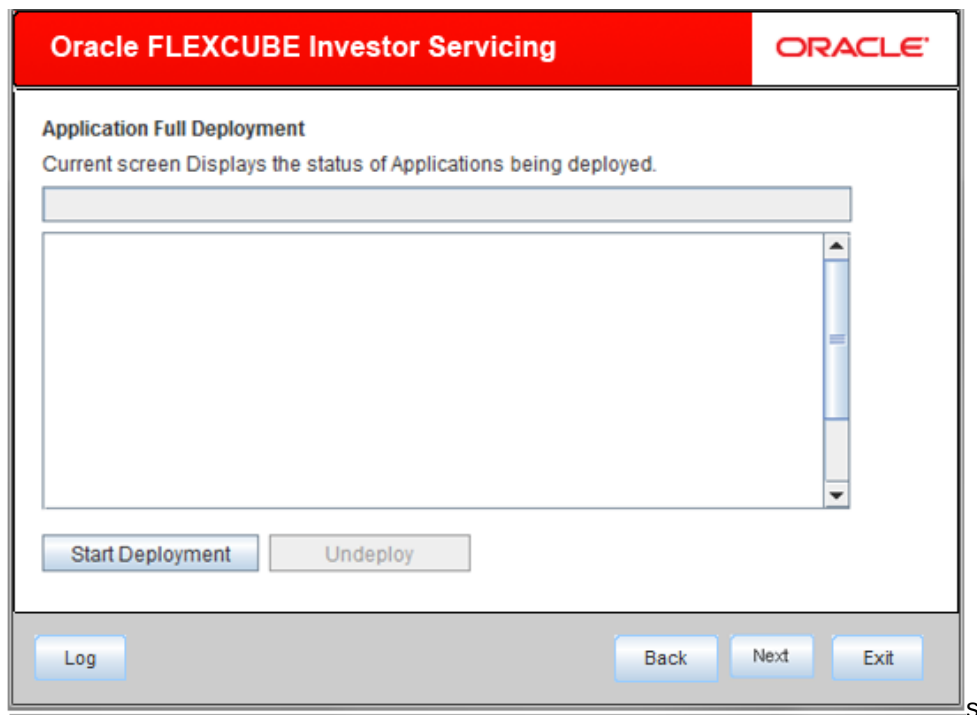


23. Click 'Start Deployment' to begin the process of application deployment.


On successful deployment, you will get the following message and the screen is expected to look like below.

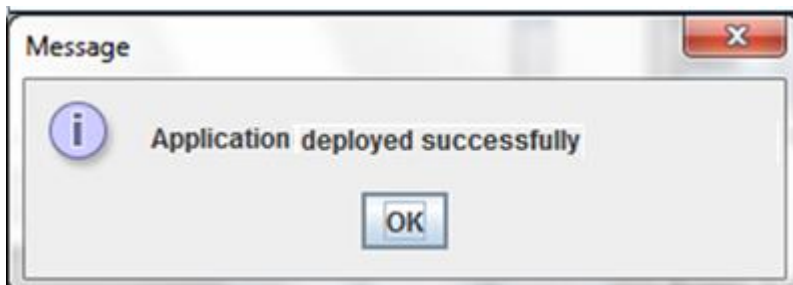

24. Click 'OK' and the following screen is displayed:

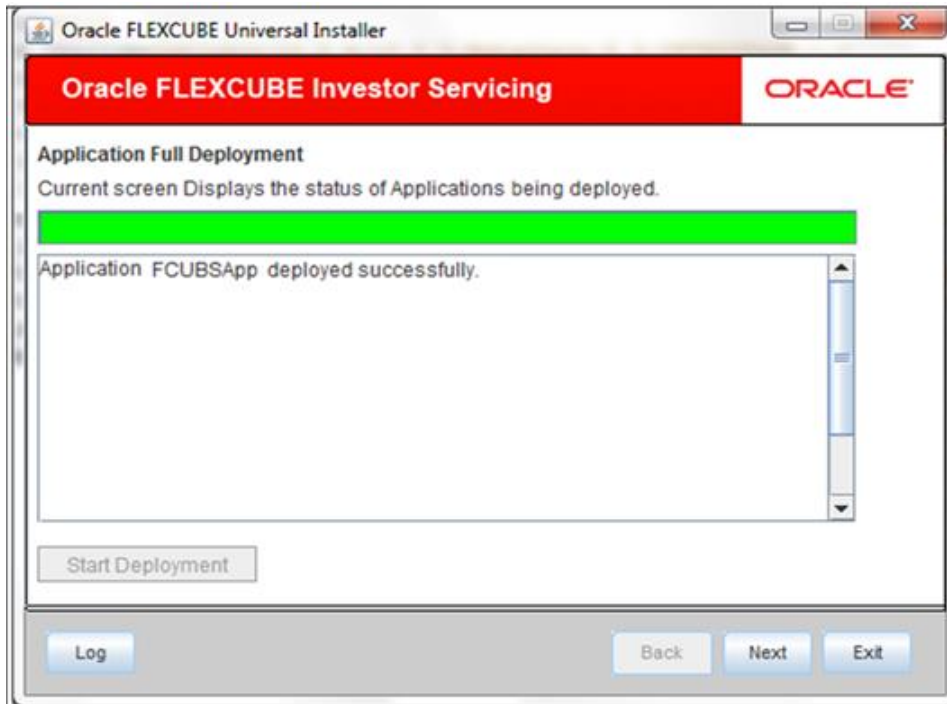

25. If the deployment is not successful, the 'Undeploy' button will be enabled.

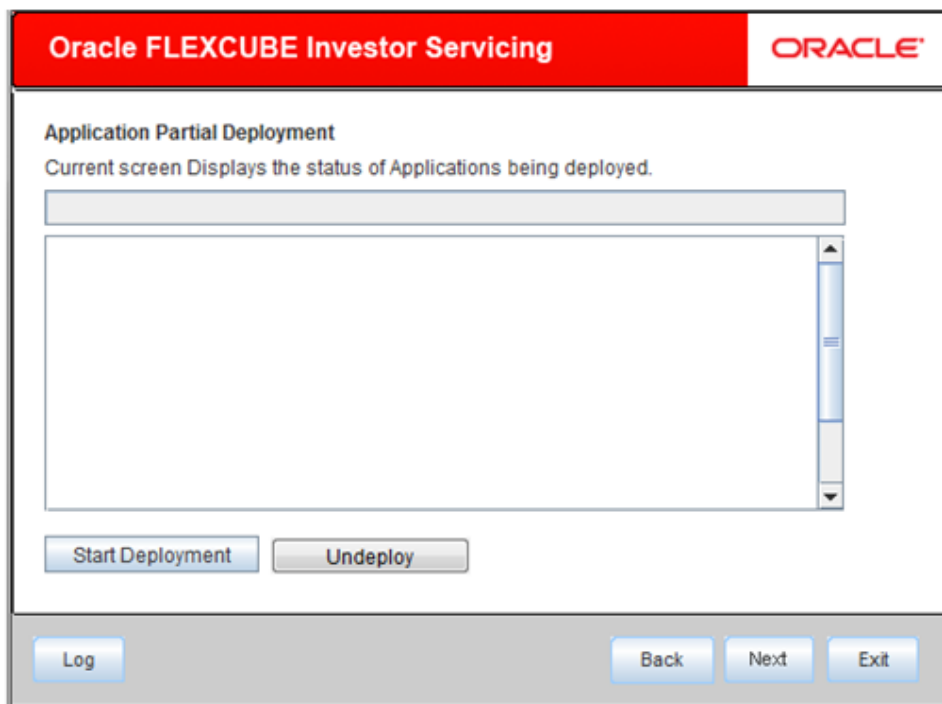

26. Click 'Undeploy' for undeploying the partially deployed EAR from the server.



Open Development Tool Installation
[October] [2024]
Version 14.7.6.0.0

Oracle Financial Services Software Limited
Oracle Park
Off Western Express Highway
Goregaon (East)
Mumbai, Maharashtra 400 063
India

Worldwide Inquiries:
Phone: +91 22 6718 3000
Fax: +91 22 6718 3001
www.oracle.com/financialservices/

Copyright © 2007, 2024, Oracle and/or its affiliates. All rights reserved.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate failsafe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing. This software or hardware and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate failsafe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing. This software or hardware and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

